

REPORT NUMBER: NCAP-MGA-2019-037

**NEW CAR ASSESSMENT PROGRAM (NCAP)
Frontal Barrier Impact Test**

**GENERAL MOTORS LLC
2019 Chevrolet Silverado 4WD Custom TB Double Cab Truck
NHTSA No.: M20190109**

**MGA RESEARCH CORPORATION
5000 Warren Road
Burlington, WI 53105**




Test Date: March 7, 2019


Final Report Date: July 31, 2019

FINAL REPORT

**U.S. DEPARTMENT OF TRANSPORTATION
National Highway Traffic Safety Administration
Office of Crashworthiness Standards
Mail Code: NRM-110
1200 New Jersey Ave, SE
Room W43-410
Washington, DC 20590**

This publication is distributed by the U.S. Department of Transportation, National Highway Traffic Safety Administration, in the interest of information exchange. The opinions, findings and conclusions expressed in this publication are those of the author(s) and not necessarily those of the Department of Transportation or the National Highway Traffic Safety Administration. The United States Government assumes no liability for its contents or use thereof. If trade or manufacturers' names or products are mentioned, it is only because they are considered essential to the object of the publication and should not be construed as an endorsement. The United States Government does not endorse products or manufacturers.

Prepared by: 
Robert Schnorenberg, Project Engineer

Approved by: 
Ben Fischer, Project Engineer

Approval Date: July 31, 2019

FINAL REPORT ACCEPTANCE BY OCWS:

Division Chief, New Car Assessment Program
NHTSA, Office of Crashworthiness Standards

Date: _____

COTR, New Car Assessment Program
NHTSA, Office of Crashworthiness Standards

Date: _____

Technical Report Documentation Page

1. Report No. NCAP-MGA-2019-037	2. Government Accession No.	3. Recipient's Catalog No.																																																							
4. Title and Subtitle Final Report of New Car Assessment Program Frontal Impact Testing of a 2019 Chevrolet Silverado 4WD Custom TB Double Cab Truck, NHTSA No.: M20190109		5. Report Date July 31, 2019																																																							
		6. Performing Organization Code MGA																																																							
7. Author(s) Robert Schnorenberg, Project Engineer		8. Performing Organization Report No. NCAP-MGA-2019-037																																																							
9. Performing Organization Name and Address MGA Research Corporation 5000 Warren Road Burlington, WI 53105		10. Work Unit No.																																																							
		11. Contract or Grant No. DTNH22-12-D-00258																																																							
12. Sponsoring Agency Name and Address U.S. Department of Transportation National Highway Traffic Safety Administration Office of Crashworthiness Standards (NRM-110) 1200 New Jersey Ave, SE, Room W43-410 Washington, D.C. 20590		13. Type of Report and Period Covered Final Test Report March 7, 2019 to July 31, 2019																																																							
		14. Sponsoring Agency Code NRM-110																																																							
15. Supplementary Notes																																																									
<p>16. Abstract</p> <p>A 56.3 km/h NCAP Frontal Impact Test was conducted on a 2019 Chevrolet Silverado 4WD Custom TB Double Cab Truck in accordance with the specifications of the Office of Crashworthiness Standards Frontal NCAP Laboratory Test Procedure. This test was conducted to obtain data indicant of FMVSS 208, 212, 219 (partial), and 301 performance. The test was conducted at MGA Research Corporation in Burlington, Wisconsin on March 7, 2019.</p> <p>The impact velocity of the vehicle was 56.53 km/h and the ambient temperature at the barrier face at the time of impact was 21.1°C. The target vehicle post-test maximum crush was 681 mm located at the vehicle centerline. The test vehicle's performance was as follows:</p>																																																									
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th rowspan="2">Measurement Description</th> <th rowspan="2">Units</th> <th colspan="2">Driver ATD</th> <th colspan="2">Passenger ATD</th> </tr> <tr> <th>Threshold</th> <th>Result</th> <th>Threshold</th> <th>Result</th> </tr> </thead> <tbody> <tr> <td>Head Injury Criteria (HIC₁₅)</td> <td>N/A</td> <td>700</td> <td>116</td> <td>700</td> <td>219</td> </tr> <tr> <td>Maximum Chest</td> <td>mm</td> <td>63</td> <td>23</td> <td>52</td> <td>16</td> </tr> <tr> <td>Nij</td> <td>N/A</td> <td>1</td> <td>0.27</td> <td>1</td> <td>0.62</td> </tr> <tr> <td>Neck Tension</td> <td>N</td> <td>4170</td> <td>1225</td> <td>2620</td> <td>906</td> </tr> <tr> <td>Neck Compression</td> <td>N</td> <td>4000</td> <td>57</td> <td>2520</td> <td>159</td> </tr> <tr> <td>Left Femur Force</td> <td>N</td> <td>10008</td> <td>1340</td> <td>6805</td> <td>1430</td> </tr> <tr> <td>Right Femur Force</td> <td>N</td> <td>10008</td> <td>1597</td> <td>6805</td> <td>2221</td> </tr> </tbody> </table>						Measurement Description	Units	Driver ATD		Passenger ATD		Threshold	Result	Threshold	Result	Head Injury Criteria (HIC ₁₅)	N/A	700	116	700	219	Maximum Chest	mm	63	23	52	16	Nij	N/A	1	0.27	1	0.62	Neck Tension	N	4170	1225	2620	906	Neck Compression	N	4000	57	2520	159	Left Femur Force	N	10008	1340	6805	1430	Right Femur Force	N	10008	1597	6805	2221
Measurement Description	Units	Driver ATD		Passenger ATD																																																					
		Threshold	Result	Threshold	Result																																																				
Head Injury Criteria (HIC ₁₅)	N/A	700	116	700	219																																																				
Maximum Chest	mm	63	23	52	16																																																				
Nij	N/A	1	0.27	1	0.62																																																				
Neck Tension	N	4170	1225	2620	906																																																				
Neck Compression	N	4000	57	2520	159																																																				
Left Femur Force	N	10008	1340	6805	1430																																																				
Right Femur Force	N	10008	1597	6805	2221																																																				
17. Key Words 35 mph Frontal Barrier Impact Test New Car Assessment Program (NCAP)			18. Distribution Statement Copies of this report are available from: National Highway Traffic Safety Administration Technical Information Services Division, NPO-411 1200 New Jersey Ave, SE Washington, DC 20590 Email: tis@nhtsa.dot.gov FAX: 202-493-2833																																																						
19. Security Classification of Report Unclassified	20. Security Classification of Page Unclassified	21. No. of Pages 172		22. Price																																																					

TABLE OF CONTENTS

<u>Section</u>		<u>Page No.</u>
1	Purpose and Summary of Test	1
2	Occupant and Vehicle Information / Data Sheets	3

<u>Data Sheet No.</u>		<u>Page No.</u>
1	General Test and Vehicle Parameter Data	4
2	Seat Adjustment, Fuel System, and Steering Wheel Data	8
3	Dummy Longitudinal Clearance Dimensions	10
4	Dummy Lateral Clearance Dimensions	11
5	Seat Belt Positioning Data	12
6	High-Speed Camera Locations and Data	13
7	Vehicle Accelerometer Locations	15
8	Photographic Reference Target Locations	16
9	Load Cell Locations on Fixed Barrier	17
10	Test Vehicle Summary of Results	18
11	Post-Test Observations	19
12	Vehicle Profile Measurements	20
13	Accident Investigation Division Data	22
14	Vehicle Intrusion Measurements	23
15	Summary of FMVSS 212, FMVSS 219 (Partial) Data, and 301 Data	25
16	FMVSS 301 Static Rollover Results	27
17	Dummy/Vehicle Temperature Stabilization Data	28

<u>Appendix</u>		
A	Photographs	A
B	Dummy Response Data Traces	B
C	Dummy Calibration and Performance Verification Data	C

SECTION 1 PURPOSE AND SUMMARY OF TEST

PURPOSE

This 56.3 km/h frontal barrier impact test is part of the Vehicle Barrier Impact Testing Program sponsored by the National Highway Traffic Safety Administration (NHTSA) under contract number DTNH22-12-D-00258. The purpose of this test was to obtain vehicle crashworthiness and occupant restraint system performance data for consumer information purposes.

The 56.3 km/h frontal barrier impact was conducted in accordance with the Office of Crashworthiness Standards Frontal NCAP Laboratory Test Procedure.

SUMMARY

A load cell barrier consisting of 176 load cells was impacted by a 2019 Chevrolet Silverado 4WD Custom TB Double Cab Truck at a velocity of 56.53 km/h. The test was performed at MGA Research Corporation on March 7, 2019. Pre-test and post-test photographs of the vehicle and dummies can be found in Appendix A.

Two (2) real-time cameras and fourteen (14) high-speed cameras were used to document the frontal barrier impact event. Camera locations and other pertinent camera information can be found in this report.

One Part 572E 50th percentile male anthropomorphic test device (ATD), was placed in the driver seating position and one Part 572O 5th percentile female test device (ATD) was placed in the right-front passenger seating position according to dummy placement instructions specified in the Frontal NCAP Laboratory Test Procedure.

Both ATDs were fully instrumented with head, chest and pelvis tri-axial accelerometers, chest displacement potentiometers, upper neck transducers, right/left femur load cells, and lower leg instrumentation.

The driver (position 1) ATD (Serial No. 351) and the right-front passenger (position 2) ATD (Serial No. DH1659) were calibrated previous to this test. Certification details, along with instrumentation calibration data, are found in Appendix C of this report.

The 634 channels of data were recorded on a data acquisition system. Appendix B contains the dummy response data traces.

There was 100 percent windshield retention and no intrusion into the protected zone of the windshield during the event. There was no Stoddard Solvent leakage after the event or during any phase of the static rollover.

The maximum static crush of the vehicle was 681 mm located at the vehicle centerline and both the driver and passenger side doors remained closed during the impact event and were operable after the impact.

The driver's visible contact points were as follows: The driver's head contacted the airbag. The driver's head also contacted the headrest. The driver's knees contacted the knee bolster. The passenger's visible contact points were as follows: The passenger's head contacted the airbag. The passenger's head also contacted the headrest. The passenger's knees contacted the glove box.

The occupant data is summarized below:

ATD position	HIC ₁₅	Nij	Neck Tension (N)	Neck Comp. (N)	3ms Chest Clip (Gs)	Chest Disp. (mm)	Left Femur (N)	Right Femur (N)
Driver (50 th)	116	0.27	1225	57	34	23	1340	1597
Passenger (5 th)	219	0.62	906	159	41	16	1430	2221

The test data can be found on the NHTSA website at www.nhtsa.gov.

TEST NOTES

Driver Shoulder Belt recorded no valid data.
 Barrier C-01 Fx recorded no valid data.
 Barrier I-05 My recorded no valid data.
 Barrier K-03 Fx recorded questionable data.
 Barrier K-15 My recorded no valid data.

MGA does not endorse or certify products. The manufacturer's name appears solely for identification purposes.

SECTION 2
OCCUPANT AND VEHICLE INFORMATION / DATA SHEETS

**DATA SHEET NO. 1
GENERAL TEST AND VEHICLE PARAMETER DATA**

Test Vehicle: 2019 Chevrolet Silverado 4WD Custom Dbl Truck
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20190109
 Test Date: 3/7/2019

TEST VEHICLE INFORMATION AND OPTIONS

NHTSA No.	M20190109	Traction Control System (TCS)	Yes
Model Year	2019	Power Steering	Yes
Make	Chevrolet	Power Window Auto-Reverse	Yes
Model	Silverado 4WD Custom TB Dbl	Driver Frontal Airbag	Yes
Body Style	Truck	Driver Curtain Airbag	Yes
VIN	1GCRYCEF8KZ183385	Driver Head/Torso Airbag	No
Body Color	Red Hot	Driver Torso Airbag	No
Odometer (km/mi)	290km / 180mi	Driver Torso/Pelvis Airbag	Yes
Engine Displacement (L)	5.3 L	Driver Pelvis Airbag	No
Type/No. Cylinders	V8	Driver Knee Airbag	No
Engine Placement	Longitudinal	Front Pass. Frontal Airbag	Yes
Transmission Type	Automatic	Front Pass. Curtain Airbag	Yes
Transmission Speeds	6	Front Pass. Head/Torso Airbag	No
Overdrive	Yes	Front Pass. Torso Airbag	No
Final Drive	4WD	Front Pass. Torso/Pelvis Airbag	Yes
Roof Rack	No	Front Pass. Pelvis Airbag	No
Sunroof/T-Top	No	Front Pass. Knee Airbag	No
Running Boards	No	Driver Pretensioner	Yes
Tilt Steering Wheel	Yes	Driver Load Limiter	Yes
Power Seats	No	Front Pass. Pretensioner	Yes
Anti-Lock Brakes (ABS)	Yes	Front Pass. Load Limiter	Yes
Automatic Door Locks (ADLs)	Yes	Other	N/A

Does owner's manual provide instructions to turn off automatic door locks?	No
--	----

DATA FROM CERTIFICATION LABEL

Manufactured By	GENERAL MOTORS LLC	GVWR (kg)	3130
Date of Manufacture	11/18	GAWR Front (kg)	1724
		GAWR Rear (kg)	1724

VEHICLE SEATING AND WEIGHT CAPACITY DATA


Measured Parameter	Front	Rear	Third	Total
Type of Seats	Bucket	Split Bench		
Designated Seating Capacity (DSC)	3	3		6
Capacity Weight (VCW) (kg)				773
Cargo Weight (RCLW) (kg)				365

DATA SHEET NO. 1 (CONTINUED)
GENERAL TEST AND VEHICLE PARAMETER DATA

Test Vehicle: 2019 Chevrolet Silverado 4WD Custom Dbl Truck
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20190109
 Test Date: 3/7/2019

VEHICLE TIRE INFORMATION

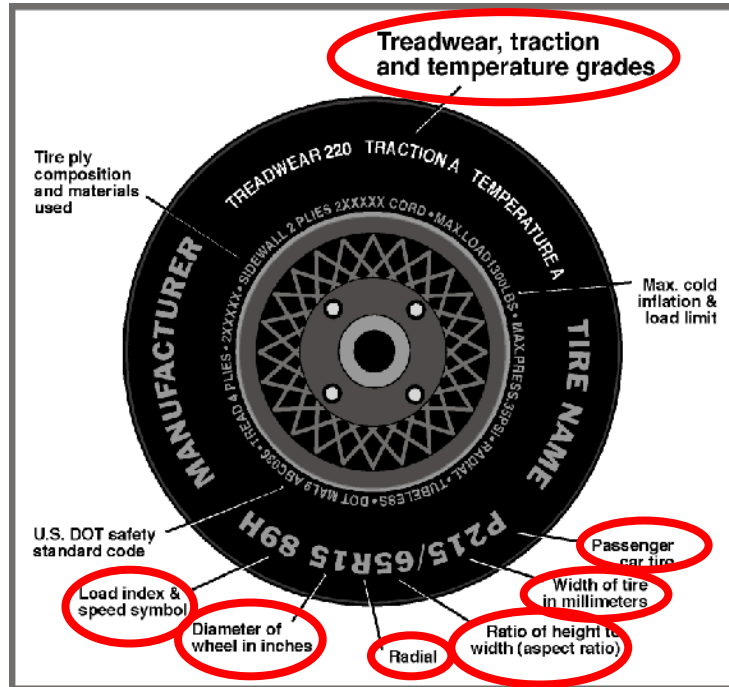

Measured Parameter	Front	Rear
Max. Tire Pressure (kPa)	350	350
Cold Pressure (kPa)	280	280
Recommended Tire Size	275/65R18	275/65R18
Tire Size on Vehicle	275/65R18	275/65R18
Tire Manufacturer	Goodyear	Goodyear
Tire Model	Wrangler Duratrac	Wrangler Duratrac
Treadwear	N/A	N/A
Traction	N/A	N/A
Temperature Grade	N/A	N/A
Tire Plies Sidewall	2 Polyester	2 Polyester
Tire Plies Body	2 Polyester, 2 Steel, 1 Polyamide	2 Polyester, 2 Steel, 1 Polyamide
Load Index/Speed Symbol	113/1100	113/1100
Tire Material	Rubber	Rubber
DOT Safety Code Left	PJB9 C21V 4218	PJB9 C21V 4218
DOT Safety Code Right	PJB9 C21V 4218	PJB9 C21V 4218

**DATA SHEET NO. 1 (CONTINUED)
GENERAL TEST AND VEHICLE PARAMETER DATA**

Test Vehicle: 2019 Chevrolet Silverado 4WD Custom Dbl Truck
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20190109
 Test Date: 3/7/2019

TEST VEHICLE WEIGHTS

	Units	As Delivered (UVW)			As Tested (ATW)		
		Front	Rear	Total	Front	Rear	Total
Left	kg	684.5	489.0		723.0	602.0	
Right	kg	674.5	471.0		689.0	574.5	
Ratio	%	58.6%	41.4%		54.5%	45.5%	
Totals	kg	1359.0	960.0	2319.0	1412.0	1176.5	2588.5

TARGET TEST WEIGHT CALCULATION

Measured Parameter	Units	Value
Total Delivered Weight (UVW)	kg	2319.0
Weight of 1 P572E ATD & 1 P572O ATD	kg	141
Rated Cargo/Luggage Weight (RCLW)	kg	136
Calculated Test Vehicle Target Weight (TVTW)	kg	2596.0

TEST VEHICLE ATTITUDES AND CG

	Units	LF	RF	LR	RR	CG (aft of front axle)
As Delivered	mm	1009	1011	1059	1067	1556
As Tested	mm	991	1001	1021	1036	1708
Post Test	mm	964	924	1017	1031	

GENERAL TEST VEHICLE DATA

Measurement Description	Units	Value
Total Vehicle Wheel Base	mm	3758
Total Vehicle Length at Left Side	mm	5441
Total Vehicle Length at Centerline	mm	5912
Total Vehicle Length at Right Side	mm	5441
Weight of Ballast in Cargo Area	kg	79
Weight of Vehicle Components Removed	kg	2
Amount of Stoddard Solvent in Fuel Tank	L	84.4

List of components removed to meet test weight: None.

List of components removed for instrumentation, data box, and equipment installation: LR and RR floor mats, LF and RF underbody plastic.

DATA SHEET NO. 1 (CONTINUED)
GENERAL TEST AND VEHICLE PARAMETER DATA

Test Vehicle: 2019 Chevrolet Silverado 4WD Custom Dbl Truck
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20190109
 Test Date: 3/7/2019

TARGET VEHICLE STRUCTURAL MEASUREMENT

	Elements	Pre-Test (mm)
1	Total Length	5912
2	Total Width	2034
3	Bumper Top Height	860
4	Bumper Bottom Height	458
5	Longitudinal Member Top Height	658
6	Distance between Longitudinal Members	693
7	Longitudinal Member Width	80
8	Engine Top Height	1273
9	Engine Bottom Height	410
10	Engine and Gearbox Width	1280
11	Front Bumper-Engine Distance	700
12	Front Shock Absorber Fixing Height	870
13	Bonnet Leading Edge Height	1262
14	Front Shock Absorber Fixing Width	940
15	Front Bumper – Front Axle Distance	974
16	Front Axle – A-Pillar Distance	590
17	A-Pillar – B-Pillar Distance	1171
18	B-Pillar – Rear Axle Distance	2000
19	B-Pillar – C-Pillar Distance	789
20	Roof Sill Bottom Height	1830
21	Roof Sill Top Height	1930
22	Floor Sill Bottom Height	400
23	Floor Sill Top Height	610


**DATA SHEET NO. 2
SEAT ADJUSTMENT, FUEL SYSTEM, AND STEERING WHEEL DATA**

Test Vehicle: 2019 Chevrolet Silverado 4WD Custom Dbl Truck
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20190109
 Test Date: 3/7/2019

NOMINAL DESIGN RIDING POSITION

The driver seat back is positioned as close as possible to the manufacturer’s design angle. For the passenger seat back, seat back is adjusted following Appendix F, “Driver & Passenger Dummy Seating & Positioning Procedures” in the NCAP Test Procedure dated October 2015.

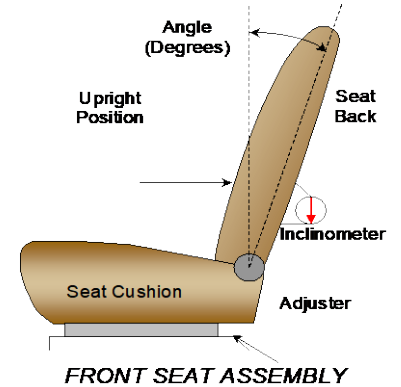

	Degrees
Driver Seat Back Angle	-11.0° on outboard headrest post
Passenger Seat Back Angle	-15.2° on outboard headrest post

SEAT FORE/AFT POSITIONS


The driver and passenger seat fore/aft positions are adjusted following Appendix F, “Driver & Passenger Dummy Seating & Positioning Procedures” in the NCAP Test Procedure dated October 2015.

	Total Fore/Aft Travel	Placed in Position #
Driver Seat	260 mm / 27 detents (1 st as 1)	130 mm / 13 th detent (1 st as 0)
Passenger Seat	260 mm / 27 detents (1 st as 1)	0 mm / 0 th detent (1 st as 0)

SEAT BELT UPPER ANCHORAGES

The seat belt upper anchorages are positioning following the manufacturer’s specified position as listed in Form 1.

	Total # of Positions	Placed in Position #
Driver Seat	Fixed	Fixed
Passenger Seat	Fixed	Fixed

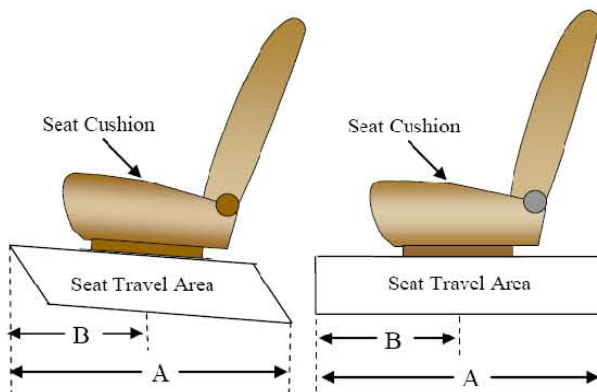

DATA SHEET NO. 2 (CONTINUED)
SEAT ADJUSTMENT, FUEL SYSTEM, AND STEERING WHEEL DATA

Test Vehicle: 2019 Chevrolet Silverado 4WD Custom Dbl Truck
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20190109
 Test Date: 3/7/2019


FUEL TANK CAPACITY DATA

	Liters
Usable Capacity of "Standard Tank"	90.8
Usable Capacity of "Optional Tank"	
92-94% of Usable Capacity	83.5 to 85.4
Actual Amount of Solvent used	84.4
1/3 of Usable Capacity	30.3

FUEL PUMP

Describe the fuel pump type, its behavior, and the location of the fuel filler pipe.


The vehicle is equipped with an electronic fuel pump. The fuel pump will run for approximately 3 seconds when the key is turned to "ON" position, then it will stop and will not resume operation unless the engine is cranking or running. The filler neck is located on the driver's side.

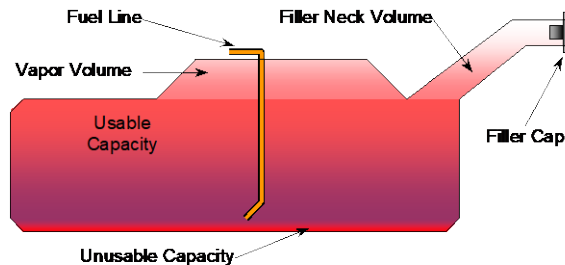

VEHICLE FUEL TANK ASSEMBLY

STEERING COLUMN ADJUSTMENT

Steering wheel and column adjustments are made so that the steering wheel hub is at the geometric center of the locus it describes when moved through its full range of motion. An aluminum plate is placed across the rim of the steering wheel, an inclinometer is placed on the plate and the angle is measured.

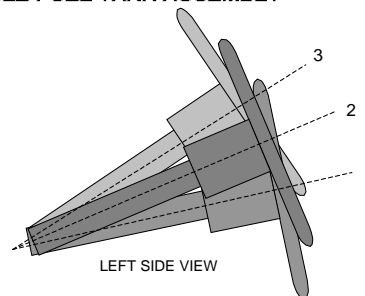

STEERING COLUMN ASSEMBLY


STEERING COLUMN POSITION

	Degrees	Fore/Aft Position (mm)
Lowermost Position 1	71.2	
Geometric Center Position 2	69.2	
Uppermost Position 3	67.2	
Telescoping Steering Wheel Travel		
Test Position	69.2	

**DATA SHEET NO. 3
DUMMY LONGITUDINAL CLEARANCE DIMENSIONS**

Test Vehicle: 2019 Chevrolet Silverado 4WD Custom Dbl Truck
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20190109
 Test Date: 3/7/2019

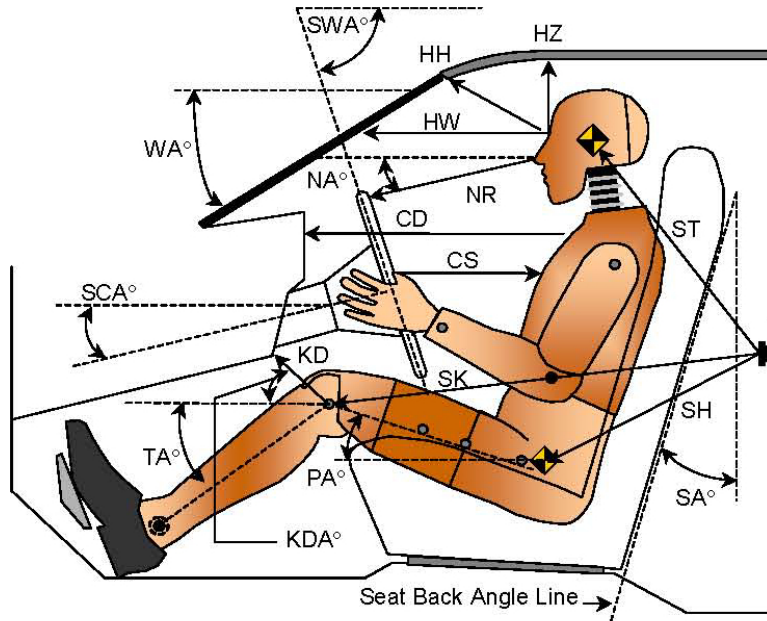


LEFT SIDE VIEW

Code	Measurement Description	Driver		Passenger	
		Length (mm)	Angle (°)	Length (mm)	Angle (°)
WA°	Windshield Angle		27.7		
SWA°	Steering Wheel Angle		69.2		
SCA°	Steering Column Angle		20.8		
SA°	Seat Back Angle		-11.0		-15.2
HZ	Head to Roof (Z)	203	90	313	90
HH	Head to Header	462	20.5	392	49.0
HW	Head to Windshield	780	0	762	0
NR	Nose to Rim	445	9.3		
CD	Chest to Dash	587		458	
CS	Chest to Steering Hub	332	0.0		
RA	Rim to Abdomen	233	0		
KDL	Left Knee to Dash	188	19.1	106	38.6
KDR	Right Knee to Dash	175	15.8	112	39.5
PA°	Pelvic Angle		24.4		19.3
TA°	Tibia Angle		53.8		58.1
SK	Striker to Knee	607	94.2	702	90.8
ST	Striker to Head	592	9.3	556	26.9
SH	Striker to H-Point	220	97.2	380	104.8

**DATA SHEET NO. 4
DUMMY LATERAL CLEARANCE DIMENSIONS**

Test Vehicle: 2019 Chevrolet Silverado 4WD Custom Dbl Truck
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20190109
 Test Date: 3/7/2019

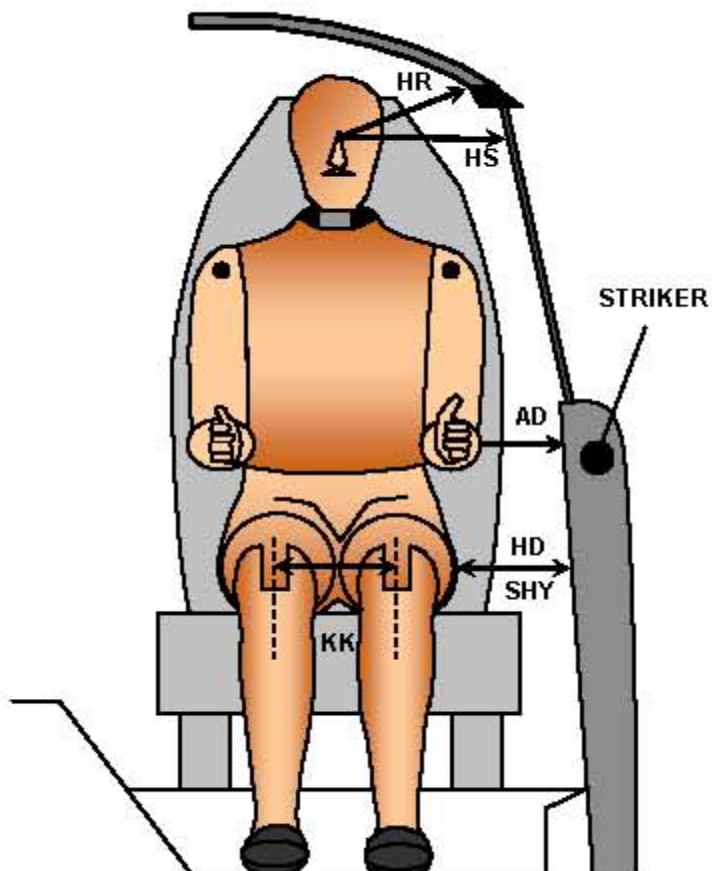


FRONT VIEW OF DUMMY

Code	Measurement Description	Driver	Passenger
		Length (mm)	
AD	Arm to Door	160	85
HD	H-Point to Door	150	182
HR	Head to Side Header	242	294
HS	Head to Side Window	333	388
KK	Knee to Knee	305	229
SHY	Striker to H-Point (Y Direction)	302	318
AA	Ankle to Ankle	300	166

**DATA SHEET NO. 5
SEAT BELT POSITIONING DATA**

Test Vehicle: 2019 Chevrolet Silverado 4WD Custom Dbl Truck
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20190109
 Test Date: 3/7/2019

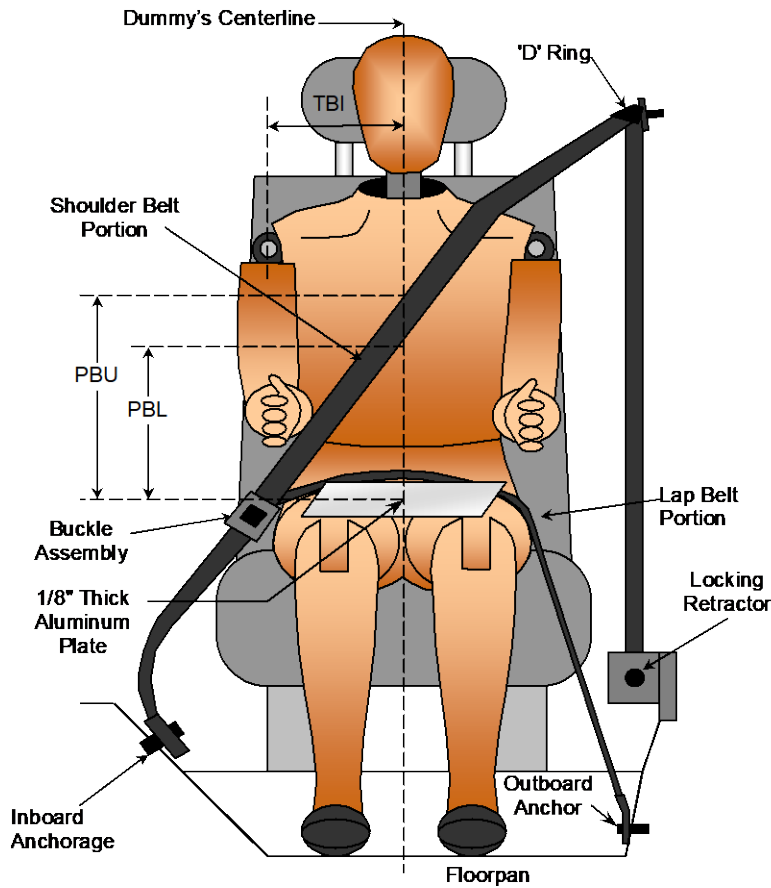

FRONT VIEW OF DUMMY

SEAT BELT POSITIONING MEASUREMENTS

Measurement Description	Units	Driver	Passenger
PBU - Top surface of reference to belt upper edge	mm	370	340
PBL - Top surface of reference to belt lower edge	mm	285	245

BELT LENGTH DATA


Measurement Description	Units	Driver	Passenger
Shoulder Belt Length as measured on ATD	mm	825	910
Lap Belt Length as measured on ATD	mm	720	765
Remainder of belt on reel	mm	1105	975
Total Belt Length for Continuous Webbing Systems	mm	3300	3300

**DATA SHEET NO. 6
HIGH-SPEED CAMERA LOCATIONS AND DATA**

Test Vehicle: 2019 Chevrolet Silverado 4WD Custom Dbl Truck
Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20190109
Test Date: 3/7/2019

CAMERA POSITIONS FOR FRONTAL IMPACTS

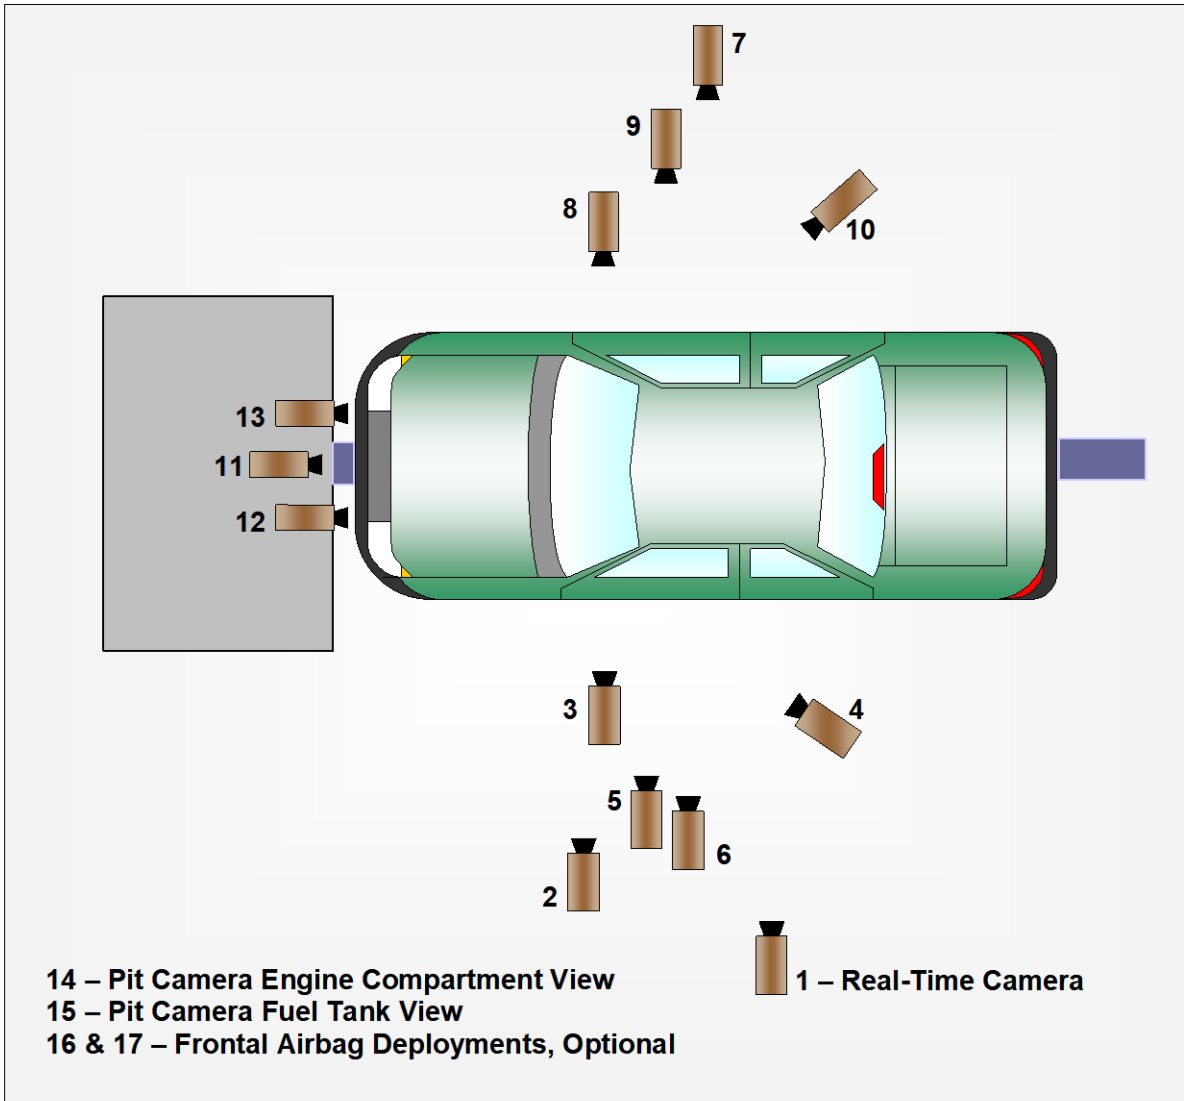

**DATA SHEET NO. 6 (CONTINUED)
CAMERA LOCATIONS AND DATA**

Test Vehicle: 2019 Chevrolet Silverado 4WD Custom Dbl Truck
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20190109
 Test Date: 3/7/2019

CAMERA LOCATIONS

No.	Camera View	Coordinates (mm)			Lens (mm)	Speed (fps)
		X*	Y*	Z*		
1	Real-Time Left Overall					30
2	Driver Close-Up	6740	-3019	-1920	50	1000
3	Left Front Half	6011	-2702	-1417	24	1000
4	Left Angle	7210	-8412	-2151	75	1000
5	Steering Column - Top					
6	Steering Column - Bottom					
7	Right Overall	6619	2973	-1598	14	1000
8	Passenger Close-Up	6463	1828	-2066	50	1000
9	Right Front Half	6108	1404	-1432	24	1000
10	Right Angle	7400	5530	-1950	75	1000
11	Windshield	100	0	-2310	11	1000
12	Driver Windshield	170	-370	-2230	25	1000
13	Passenger Windshield	170	370	-2230	25	1000
14	Pit Front	1010	0	3340	24	1000
15	Pit Rear	3290	0	3340	24	1000
16	Onboard Driver Side				12	1000
17	Onboard Passenger Side				12	1000
18	Real-Time Pan View					30

***COORDINATES:**



- +X = forward of impact plane
- +Y = right of monorail centerline
- +Z = below ground level

Cameras 5 & 6 were not used for this test.

**DATA SHEET NO. 7
VEHICLE ACCELEROMETER LOCATIONS**

Test Vehicle: 2019 Chevrolet Silverado 4WD Custom Dbl Truck
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20190109
 Test Date: 3/7/2019

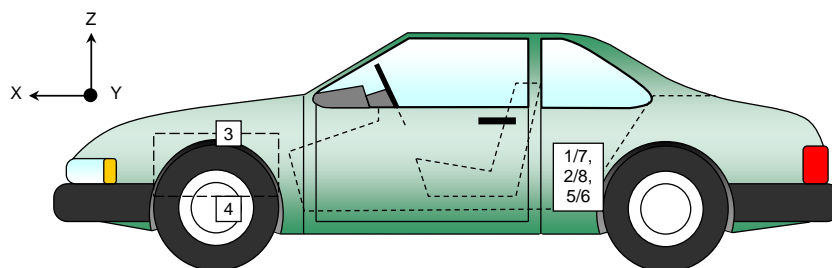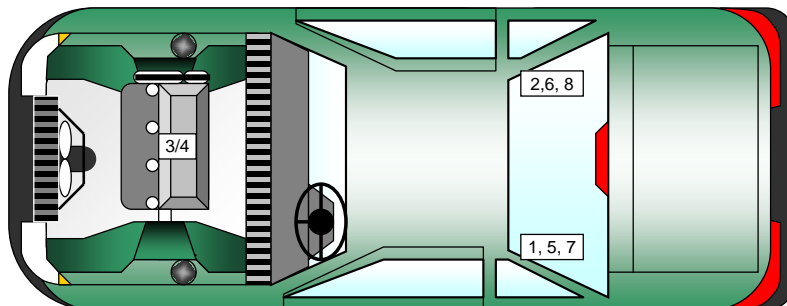

VEHICLE ACCELEROMETER PRE-TEST LOCATIONS

No.	Accelerometer Location	Measurements (mm)		
		X	Y	Z
1	Left Rear Crossmember Accelerometer – X Direction	2643	-405	-686
2	Right Rear Crossmember Accelerometer – X Direction	2643	405	-675
3	Engine Top X	4961	28	-1199
4	Engine Bottom X	4619	25	-405
5	Left Rear Crossmember Accelerometer – Z Direction	2643	-405	-686
6	Right Rear Crossmember Accelerometer – Z Direction	2643	405	-675
7	Left Rear Crossmember Accelerometer Redundant – X Direction	2684	-405	-686
8	Right Rear Crossmember Accelerometer Redundant – X Direction	2684	405	-675




Reference Points: X - Rear Surface of Vehicle (+ forward)
 Y - Vehicle Centerline (+ to right)
 Z - Ground Plane (+ down)

DATA SHEET NO. 8
PHOTOGRAPHIC REFERENCE TARGET LOCATIONS

Test Vehicle: 2019 Chevrolet Silverado 4WD Custom Dbl Truck
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20190109
 Test Date: 3/7/2019

Item	Value (mm)
A	454
B	1017
C	2555
D	610
E	2747
F	240
G	
H	2462
I	1520
J	980
K	980
L	2432
M	2462
N	2432
O	980
P	980
Q	1520

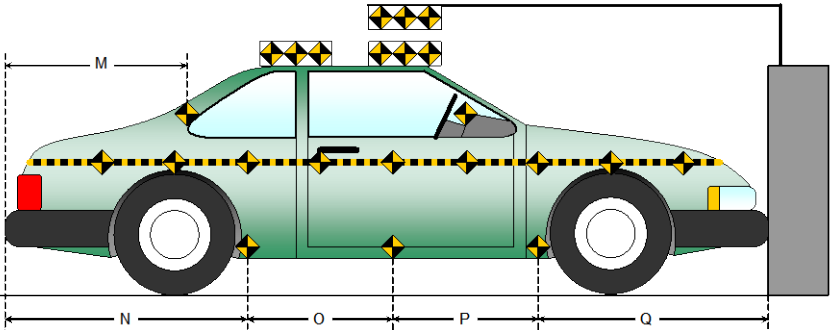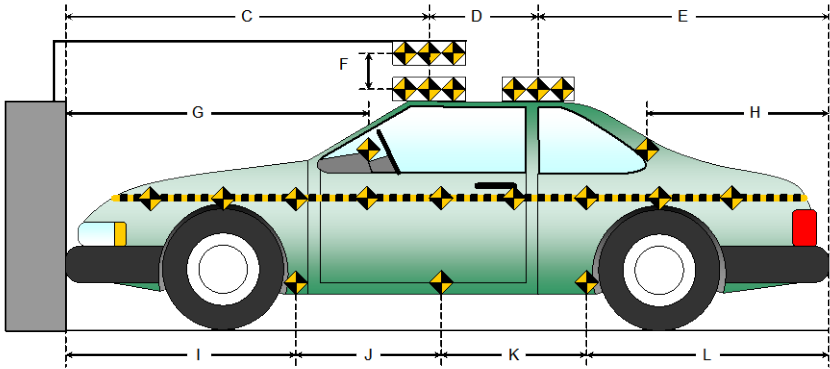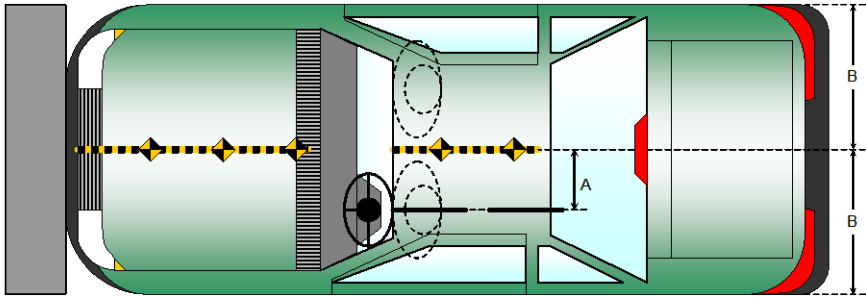

**DATA SHEET NO. 9
LOAD CELL LOCATIONS ON FIXED BARRIER**

Test Vehicle: 2019 Chevrolet Silverado 4WD Custom Dbl Truck
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20190109
 Test Date: 3/7/2019

Advanced Research Load Cell Barrier

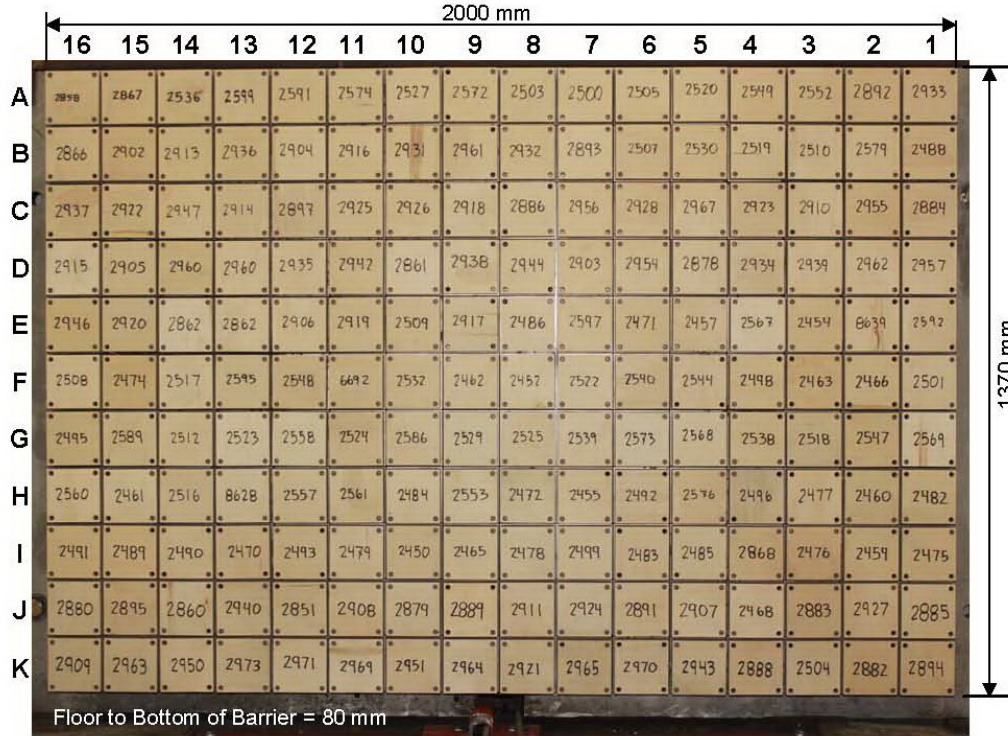


Photo for Reference Only

Centerline

A-16	A-15	A-14	A-13	A-12	A-11	A-10	A-09	A-08	A-07	A-06	A-05	A-04	A-03	A-02	A-01
B-16	B-15	B-14	B-13	B-12	B-11	B-10	B-09	B-08	B-07	B-06	B-05	B-04	B-03	B-02	B-01
C-16	C-15	C-14	C-13	C-12	C-11	C-10	C-09	C-08	C-07	C-06	C-05	C-04	C-03	C-02	C-01
D-16	D-15	D-14	D-13	D-12	D-11	D-10	D-09	D-08	D-07	D-06	D-05	D-04	D-03	D-02	D-01
E-16	E-15	E-14	E-13	E-12	E-11	E-10	E-09	E-08	E-07	E-06	E-05	E-04	E-03	E-02	E-01
F-16	F-15	F-14	F-13	F-12	F-11	F-10	F-09	F-08	F-07	F-06	F-05	F-04	F-03	F-02	F-01
G-16	G-15	G-14	G-13	G-12	G-11	G-10	G-09	G-08	G-07	G-06	G-05	G-04	G-03	G-02	G-01
H-16	H-15	H-14	H-13	H-12	H-11	H-10	H-09	H-08	H-07	H-06	H-05	H-04	H-03	H-02	H-01
I-16	I-15	I-14	I-13	I-12	I-11	I-10	I-09	I-08	I-07	I-06	I-05	I-04	I-03	I-02	I-01
J-16	J-15	J-14	J-13	J-12	J-11	J-10	J-09	J-08	J-07	J-06	J-05	J-04	J-03	J-02	J-01
K-16	K-15	K-14	K-13	K-12	K-11	K-10	K-09	K-08	K-07	K-06	K-05	K-04	K-03	K-02	K-01

Load Cells are 121 mm x 121 mm with a 7 mm gap in between each load cell.

DATA SHEET NO. 10
TEST VEHICLE SUMMARY OF RESULTS

Test Vehicle: 2019 Chevrolet Silverado 4WD Custom Dbl Truck
Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20190109
Test Date: 3/7/2019

INSTRUMENTATION

Driver Dummy Data Channels	49
Passenger Dummy Data Channels	49
Vehicle Structure Accelerometers	8
Barrier Channels	528
Total	634

CAMERA COVERAGE

High-Speed Vehicle Onboard	2
High-Speed Offboard	12
Real-Time	2
Total	16

**DATA SHEET NO. 11
POST-TEST OBSERVATIONS**

Test Vehicle: 2019 Chevrolet Silverado 4WD Custom Dbl Truck
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20190109
 Test Date: 3/7/2019

TEST DUMMY INFORMATION AND CONTACT LOCATIONS

Description	Driver	Passenger
Dummy Type / Serial No.	HIII 50% / 351	HIII 5% / DH1659
Head Contact	Frontal Airbag, Headrest	Frontal Airbag, Headrest
Upper Torso Contact	None	None
Lower Torso Contact	None	None
Left Knee Contact	Knee Bolster	Glove Box
Right Knee Contact	Knee Bolster	Glove Box

DOOR OPENING AND SEAT TRACK INFORMATION

Description	Driver	Passenger
Locked/Unlocked Doors	Doors were locked	Doors were locked
Front Door Opening	Door remained closed and latched; Door opened without tools	Door remained closed and latched; Door opened without tools
Rear Door Opening	Door remained closed and latched; Door opened without tools	Door remained closed and latched; Door opened without tools
Seat Track Shift (mm)	0	0
Seat Back Failure	None	None

POST TEST STRUCTURAL OBSERVATIONS

Critical Areas of Performance	Observations and Conclusions
Windshield Damage	None
Window Damage	None
Other Notable Effects	None

VEHICLE REBOUND FROM BARRIER

Measured Parameter	Units	Value
Left Side	mm	276
Center	mm	285
Right Side	mm	299
Average	mm	287


SUPPLEMENTAL RESTRAINT SYSTEM INFORMATION

Restraint Type	Driver (Occupant 1)		Passenger (Occupant 2)	
	Mounted	Deployed	Mounted	Deployed
Frontal Airbag	Yes	Yes	Yes	Yes
Curtain Side Airbag	Yes	Yes	Yes	Yes
Torso/Pelvis Side Airbag	Yes	No	Yes	No
Knee Airbag	No		No	
Seat Belt Pretensioner	Yes	Yes	Yes	Yes
Seat Belt Load Limiter	Yes		Yes	

DATA SHEET NO. 12 VEHICLE PROFILE MEASUREMENTS

Test Vehicle: 2019 Chevrolet Silverado 4WD Custom Dbl Truck
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20190109
 Test Date: 3/7/2019

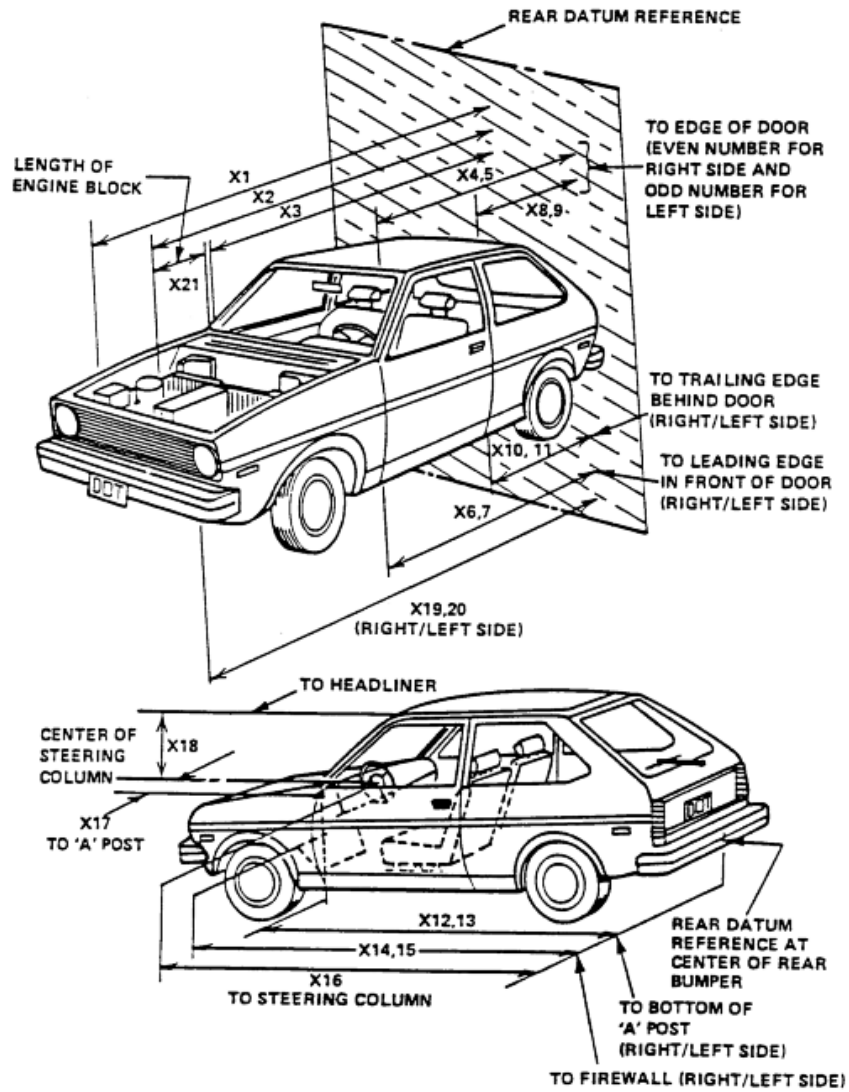

**DATA SHEET NO. 12 (CONTINUED)
VEHICLE PROFILE MEASUREMENTS**

Test Vehicle: 2019 Chevrolet Silverado 4WD Custom Dbl Truck
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20190109
 Test Date: 3/7/2019

RSOV (Rear Surface of Vehicle)

No.	Measurement Description	Units	Pre-Test	Post-Test	Difference
1	Total Length of Vehicle at Centerline	mm	5912	5231	681
2	RSOV to Front of Engine	mm	5014	4854	160
3	RSOV to Firewall	mm	4796	4759	37
4	RSOV to Upper Leading Edge of Right Door	mm	4396	4415	-19
5	RSOV to Upper Leading Edge of Left Door	mm	4396	4399	-3
6	RSOV to Lower Leading Edge of Right Door	mm	4296	4280	16
7	RSOV to Lower Leading Edge of Left Door	mm	4296	4291	5
8	RSOV to Upper Trailing Edge of Right Door	mm	3202	3223	-21
9	RSOV to Upper Trailing Edge of Left Door	mm	3202	3220	-18
10	RSOV to Lower Trailing Edge of Right Door	mm	3191	3178	13
11	RSOV to Lower Trailing Edge of Left Door	mm	3191	3172	19
12	RSOV to Bottom of "A" Post of Right Side	mm	4319	4302	17
13	RSOV to Bottom of "A" Post of Left Side	mm	4319	4309	10
14	RSOV to Firewall, Right Side	mm	4662	4610	52
15	RSOV to Firewall, Left Side	mm	4662	4582	80
16	RSOV to Steering Column	mm	3838	3930	-92
17	Center of Steering Column to "A" Post	mm	416	397	19
18	Center of Steering Column to Headliner	mm	463	463	0
19	RSOV to Right Side of Front Bumper	mm	5441	5158	283
20	RSOV to Left Side of Front Bumper	mm	5441	5257	184
21	Length of Engine Block	mm	450	450	0
RD	RSOV to Right Side of Dash Panel	mm	4148	4175	-27
CD	RSOV to Center of Dash Panel	mm	4132	4165	-33
LD	RSOV to Left Side of Dash Panel	mm	4154	4186	-32

DATA SHEET NO. 13
ACCIDENT INVESTIGATION DIVISION DATA

Test Vehicle: 2019 Chevrolet Silverado 4WD Custom Dbl Truck
Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20190109
Test Date: 3/7/2019

VEHICLE INFORMATION

VIN: 1GCRYCEF8KZ183385 Wheelbase (mm): 3758
Vehicle Size Category: Truck Test Weight (kg): 2588.5

ACCELEROMETER DATA

Accelerometer Locations: As per measurements on Page 15

Cal. Procedure/Interval: MGA procedure / 6 month

Integration Algorithm: Trapezoidal

Linearity: > 99%

Impact Velocity (km/h): 56.53

Velocity Change (km/h): 62.0

Time of Separation (msec): 99


CRUSH PROFILE

Collision Deformation Classification: 12FDEW2

Midpoint of Damage: Centerline

Damage Region Length (mm): 2340

Impact Mode: Frontal

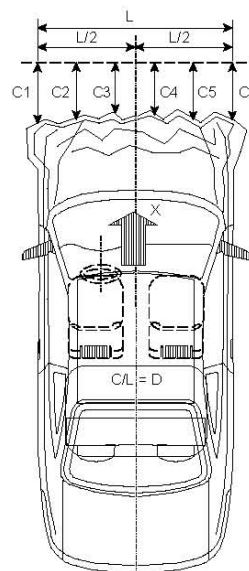

No.	Measurement Description	Units	Pre-Test	Post-Test	Difference
C1	Crush zone 1 at left side	mm	5441	5257	184
C2	Crush zone 2 at left side	mm	5769	5245	524
C3	Crush zone 3 at left side	mm	5866	5215	651
C4	Crush zone 4 at right side	mm	5866	5213	653
C5	Crush zone 5 at right side	mm	5769	5230	539
C6	Crush zone 6 at right side	mm	5441	5158	283
L	C1 TO C6	mm	2340	2259	81

**DATA SHEET NO. 14
VEHICLE INTRUSION MEASUREMENTS**

Test Vehicle: 2019 Chevrolet Silverado 4WD Custom Dbl Truck
 Test Program: NCAP Frontal Barrier Impact Test



NHTSA No.: M20190109
 Test Date: 3/7/2019

DOOR OPENING WIDTH

Item	Description	Units	Pre-Test	Post-Test	Difference
A	Left Side Upper	mm	1080	1080	0
B	Left Side Lower	mm	992	992	0
D	Right Side Upper	mm	1080	1080	0
E	Right Side Lower	mm	992	992	0

WHEELBASE MEASUREMENTS

Item	Description	Units	Pre-Test	Post-Test	Difference
C	Left Side Wheelbase	mm	3758	3688	70
F	Right Side Wheelbase	mm	3758	3694	64

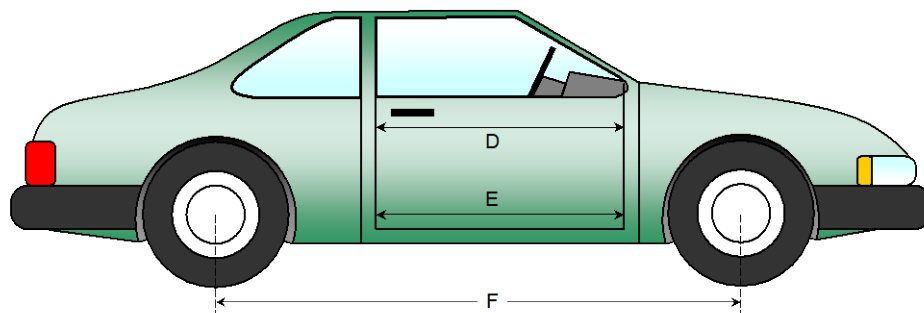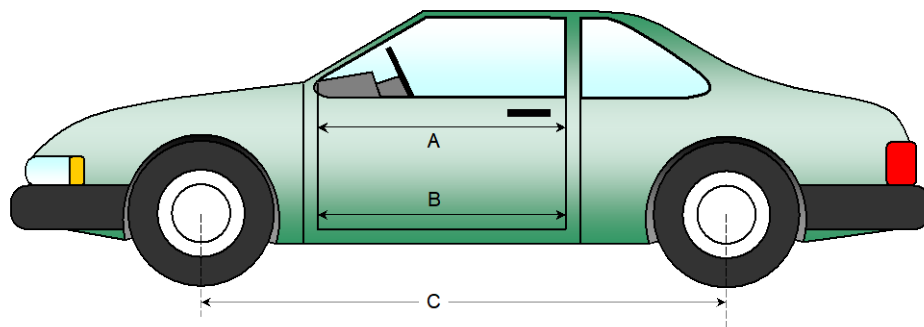

DATA SHEET NO. 14 (CONTINUED)
VEHICLE INTRUSION MEASUREMENTS


Test Vehicle: 2019 Chevrolet Silverado 4WD Custom Dbl Truck
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20190109
 Test Date: 3/7/2019

DRIVER COMPARTMENT INTRUSION

Item	Description	Units	Pre-Test	Post-Test	Difference
AB	Door Opening (Inside Window Jam)	mm	760	758	2
CX	Left Knee Bolster to X	mm	337	347	-10
DX	Right Knee Bolster to X	mm	346	351	-5
EX	Brake Pedal to X	mm	563	590	-27
FX	Foot Rest to X	mm	614	594	20
GX	Center of Steering Column Wheel Hub to X	mm	120	201	-81

X = Front of Seat Track (stationary)

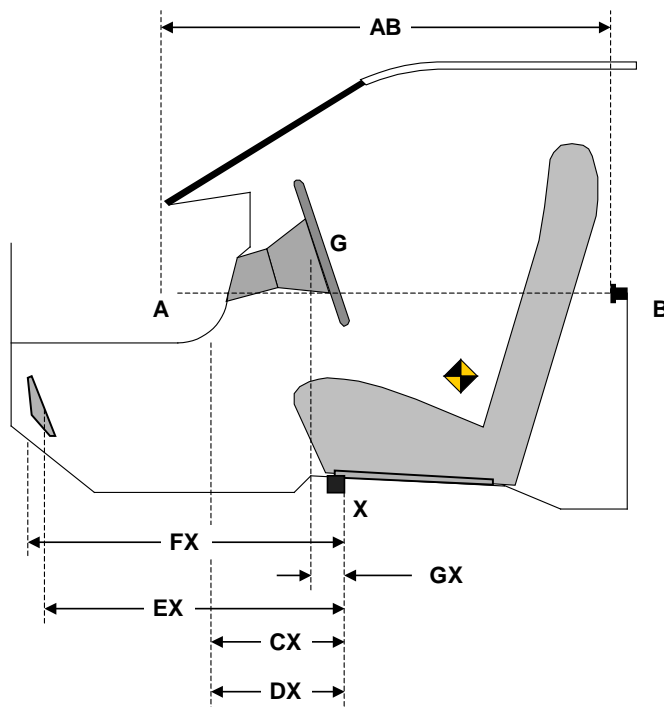

DRIVER COMPARTMENT

DATA SHEET NO. 15
SUMMARY OF FMVSS 212, FMVSS 219 (PARTIAL) DATA, AND 301 DATA

Test Vehicle: 2019 Chevrolet Silverado 4WD Custom Dbl Truck
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20190109
 Test Date: 3/7/2019

Windshield Mounting Details:


Windshield glass is secured to the vehicle frame with a rubber trim and glue.

The standard requires that the post-test retention measurement be a minimum of 75 percent of the pre-test total periphery measurement for vehicles not equipped with occupant passive restraints and 50 percent for each side of the windshield for vehicles which are equipped with occupant passive restraints.

Temperature of windshield molding during test: 21.1°C.

WINDSHIELD PERIPHERY MEASUREMENTS

Measurement	Pre-Test (mm)	Post-Test (mm)	% of Retention
Left Side	2340	2340	100
Right Side	2340	2340	100
Total	4680	4680	100

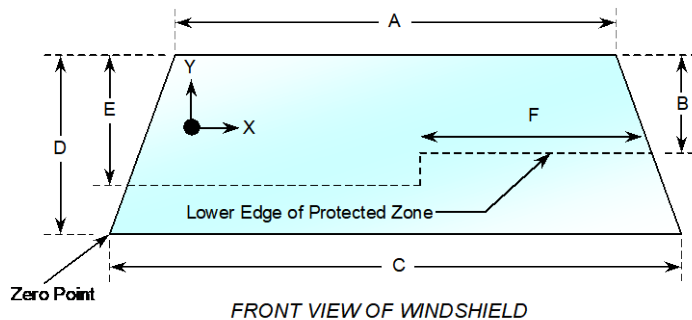

Item	Units	Value
A	mm	1410
B	mm	407
C	mm	1604
D	mm	833
E	mm	450
F	mm	505

AREA OF PROTECTED ZONE FAILURES - NONE

A. Provide coordinates of the area that the protected zone was penetrated more than 0.25 inches by a vehicle component other than one that is normally in contact with the windshield. **None**

X	Y

B. Provide coordinates of the area beneath the protected zone that the inner surface of the windshield was penetrated by a vehicle component. **None**

X	Y

DATA SHEET NO. 15 (CONTINUED)
SUMMARY OF FMVSS 212, FMVSS 219 (PARTIAL), AND 301 DATA

Test Vehicle: 2019 Chevrolet Silverado 4WD Custom Dbl Truck NHTSA No.: M20190109
Test Program: NCAP Frontal Barrier Impact Test Test Date: 3/7/2019

FMVSS 301 FUEL SYSTEM INTEGRITY POST IMPACT DATA

Temperature at Time of Impact: 21.1°C

Test Time: 10:11 a.m.


- A. From impact until vehicle motion ceases: 0 oz.
(Maximum allowable = 1 oz.)
- B. For the 5 minute period after motion ceases: 0 oz.
(Maximum allowable = 5 oz.)
- C. For the following 25 minutes: 0 oz.
(Maximum allowable = 1 oz./minute)
- D. Spillage: None

**DATA SHEET NO. 16
FMVSS 301 STATIC ROLLOVER RESULTS**

Test Vehicle: 2019 Chevrolet Silverado 4WD Custom Dbl Truck
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20190109
 Test Date: 3/7/2019

1. The specified fixture rollover rate for each 90° of rotation is 60 to 180 seconds.
2. The position hold time at each position is 300 seconds (minimum).
3. Details of Stoddard Solvent spillage: **None**

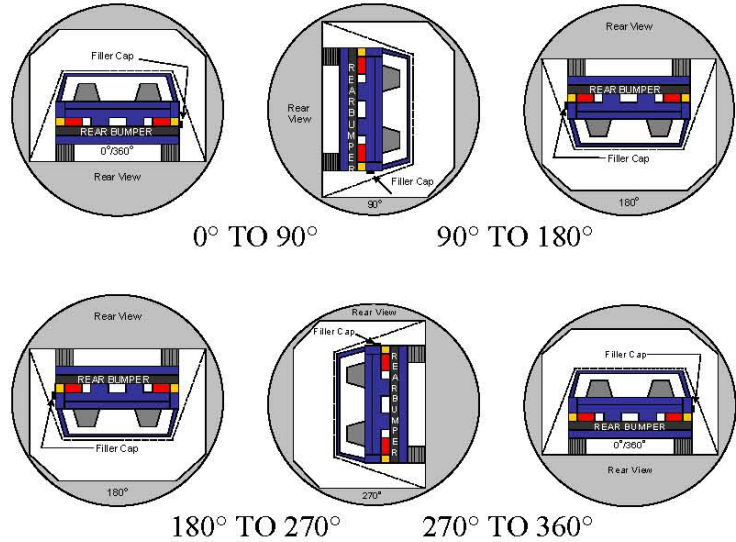

SOLVENT COLLECTION TIME TABLE IN SECONDS

Test Phase	Rotation Time	Hold Time	Total Time
0° to 90°	93	300	393
90° to 180°	92	300	392
180° to 270°	86	300	386
270° to 360°	87	300	387

FMVSS 301 SPILLAGE TABLE (units in ounces)

Test Phase	First 5 Minutes	Sixth Minute	Seventh Minute	Eight Minute
0° to 90°	0	0	0	0
90° to 180°	0	0	0	0
180° to 270°	0	0	0	0
270° to 360°	0	0	0	0


SOLVENT SPILLAGE LOCATION TABLE

Test Phase	Spillage Location
0° to 90°	
90° to 180°	
180° to 270°	
270° to 360°	

**DATA SHEET NO. 17
DUMMY/VEHICLE TEMPERATURE STABILIZATION DATA**

Test Vehicle: 2019 Chevrolet Silverado 4WD Custom Dbl Truck
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20190109
 Test Date: 3/7/2019

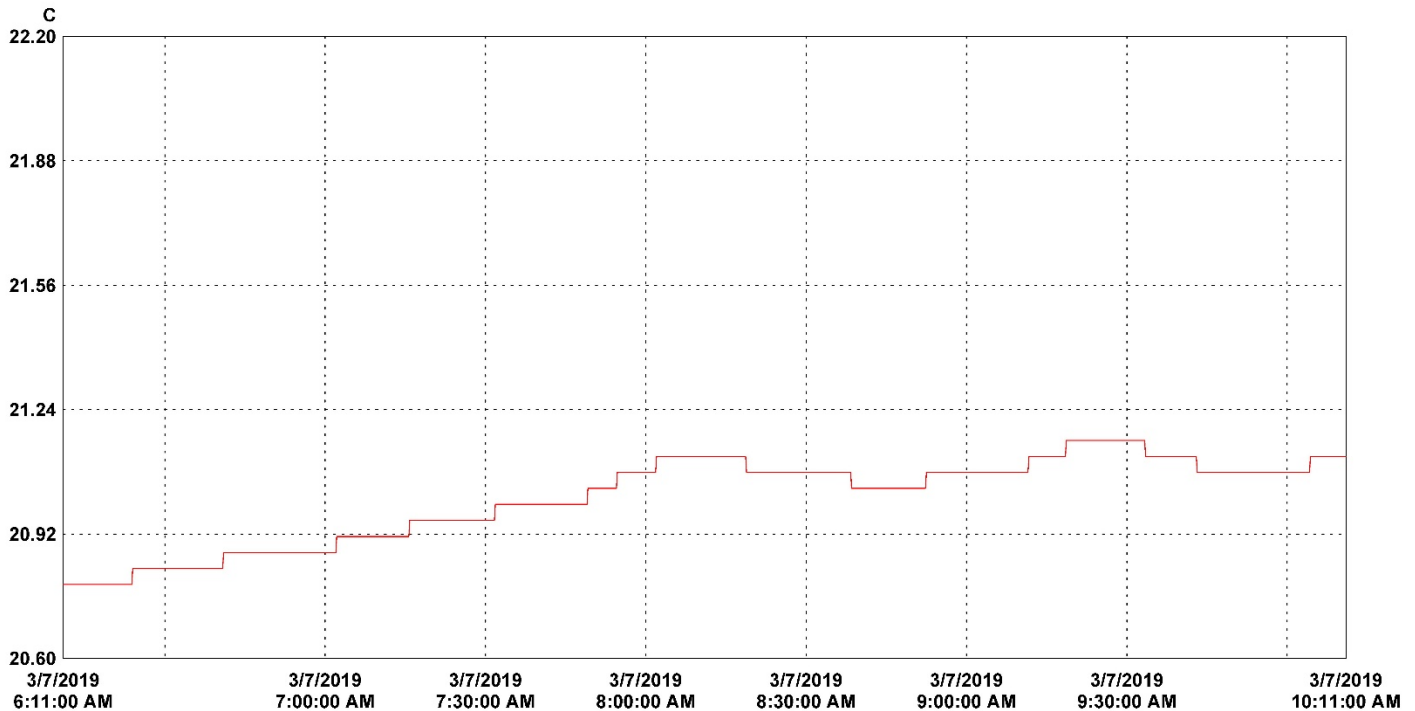

30 minutes/div 4 hours (M/d/yyyy h:mm:ss tt) Central Time Graph file (truncated): M20190109 2019 Chevrolet Silverado Custom TB Double Cab NCAP

LN	Serial #	Description	CH	Value	Maximum	Average	Minimum	Units	CH description	Logger file
1	12032257	VSC_Prep_Room	1	21.16	21.01	20.79	C	Temperature	12032257_VSC_Prep_Room.spl	

**APPENDIX A
PHOTOGRAPHS**

TABLE OF PHOTOGRAPHS

		<u>Page No.</u>
Photo No. 001	Load Cell Location	A-1
Photo No. 002	Pre-Test Load Cell Wall	A-1
Photo No. 003	Post-Test Load Cell Wall	A-2
Photo No. 004	Manufacturer's Label	A-2
Photo No. 005	Tire Placard	A-3
Photo No. 006	2019 Chevrolet Silverado Custom TB Double Cab Truck Frontal As Delivered	A-3
Photo No. 007	Left Rear 3-4 View, As Received	A-4
Photo No. 008	Pre-Test Front View of Test Vehicle	A-4
Photo No. 009	Post-Test Front View of Test Vehicle	A-5
Photo No. 010	Pre-Test Left View of Test Vehicle	A-5
Photo No. 011	Post-Test Left View of Test Vehicle	A-6
Photo No. 012	Pre-Test Right View of Test Vehicle	A-6
Photo No. 013	Post-Test Right View of Test Vehicle	A-7
Photo No. 014	Pre-Test Right Front 3-4 View	A-7
Photo No. 015	Post-Test Right Front 3-4 View	A-8
Photo No. 016	Pre-Test Left Rear 3-4 View	A-8
Photo No. 017	Post-Test Left Rear 3-4 View	A-9
Photo No. 018	Pre-Test Windshield View	A-9
Photo No. 019	Post-Test Windshield View	A-10
Photo No. 020	Pre-Test Engine Compartment View	A-10
Photo No. 021	Post-Test Engine Compartment View	A-11
Photo No. 022	Pre-Test Fuel Filler Cap View	A-11
Photo No. 023	Post-Test Fuel Filler Cap View	A-12
Photo No. 024	Pre-Test Front Underbody View	A-12
Photo No. 025	Post-Test Front Underbody View	A-13
Photo No. 026	Pre-Test Rear Underbody View	A-13
Photo No. 027	Post-Test Rear Underbody View	A-14
Photo No. 028	Pre-Test Dummy Cable Routing	A-14
Photo No. 029	Post-Test Dummy Cable Routing	A-15

		<u>Page No.</u>
Photo No. 030	Pre-Test Driver Dummy Front View	A-15
Photo No. 031	Post-Test Driver Dummy Front View	A-16
Photo No. 032	Pre-Test Driver Dummy Window View	A-16
Photo No. 033	Post-Test Driver Dummy Window View	A-17
Photo No. 034	Pre-Test Driver Dummy and Vehicle Interior (Door Open)	A-17
Photo No. 035	Post-Test Driver Dummy and Vehicle Interior (Door Open)	A-18
Photo No. 036	Pre-Test Driver's Seat Fore-Aft Markings	A-18
Photo No. 037	Post-Test Driver's Seat Fore-Aft Markings	A-19
Photo No. 038	Pre-Test View of Belt Anchorage for Driver Dummy	A-19
Photo No. 039	Post-Test View of Belt Anchorage for Driver Dummy	A-20
Photo No. 040	Pre-Test Driver Dummy Feet	A-20
Photo No. 041	Post-Test Driver Dummy Feet	A-21
Photo No. 042	Pre-Test Driver's Side Knee Bolster (without dummy)	A-21
Photo No. 043	Post-Test Driver's Side Knee Bolster (without dummy)	A-22
Photo No. 044	Pre-Test Driver's Side Floorpan	A-22
Photo No. 045	Post-Test Driver's Side Floorpan	A-23
Photo No. 046	Post-Test Driver Dummy Face	A-23
Photo No. 047	Post-Test Driver Dummy Contact with Airbag	A-24
Photo No. 048	Post-Test Driver Dummy Contact with Headrest	A-24
Photo No. 049	Pre-Test View of the Steering Wheel	A-25
Photo No. 050	Post-Test View of the Steering Wheel	A-25
Photo No. 051	Pre-Test Passenger Dummy Front View	A-26
Photo No. 052	Post-Test Passenger Dummy Front View	A-26
Photo No. 053	Pre-Test Passenger Dummy Window View	A-27
Photo No. 054	Post-Test Passenger Dummy Window View	A-27
Photo No. 055	Pre-Test Passenger Dummy and Vehicle Interior (Door Open)	A-28
Photo No. 056	Post-Test Passenger Dummy and Vehicle Interior (Door Open)	A-28
Photo No. 057	Pre-Test Passenger's Seat Fore-Aft Markings	A-29
Photo No. 058	Post-Test Passenger's Seat Fore-Aft Markings	A-29
Photo No. 059	Pre-Test View of Belt Anchorage for Passenger Dummy	A-30

		<u>Page No.</u>
Photo No. 060	Post-Test View of Belt Anchorage for Passenger Dummy	A-30
Photo No. 061	Pre-Test Passenger Dummy Feet	A-31
Photo No. 062	Post-Test Passenger Dummy Feet	A-31
Photo No. 063	Pre-Test Passenger's Side Knee Bolster (without dummy)	A-32
Photo No. 064	Post-Test Passenger's Side Knee Bolster (without dummy)	A-32
Photo No. 065	Pre-Test Passenger's Side Floorpan	A-33
Photo No. 066	Post-Test Passenger's Side Floorpan	A-33
Photo No. 067	Post-Test Passenger Dummy Face	A-34
Photo No. 068	Post-Test Passenger Dummy Contact with Airbag	A-34
Photo No. 069	Post-Test Passenger Dummy Contact with Headrest	A-35
Photo No. 070	Ballast Installed in Vehicle	A-35
Photo No. 071	Post-Test Stoddard Solvent Spillage Location View	A-36
Photo No. 072	Post-Test Speed Trap Read-Out	A-36
Photo No. 073	Vehicle at 0 Degree on Static Rollover Device	A-37
Photo No. 074	Vehicle at 90 Degrees on Static Rollover Device	A-37
Photo No. 075	Vehicle at 180 Degrees on Static Rollover Device	A-38
Photo No. 076	Vehicle at 270 Degrees on Static Rollover Device	A-38
Photo No. 077	Vehicle at 360 Degrees on Static Rollover Device	A-39
Photo No. 078	2019 Chevrolet Silverado Custom TB Double Cab Truck Frontal Impact Event	A-39
Photo No. 079	Monroney Label Photograph	A-40

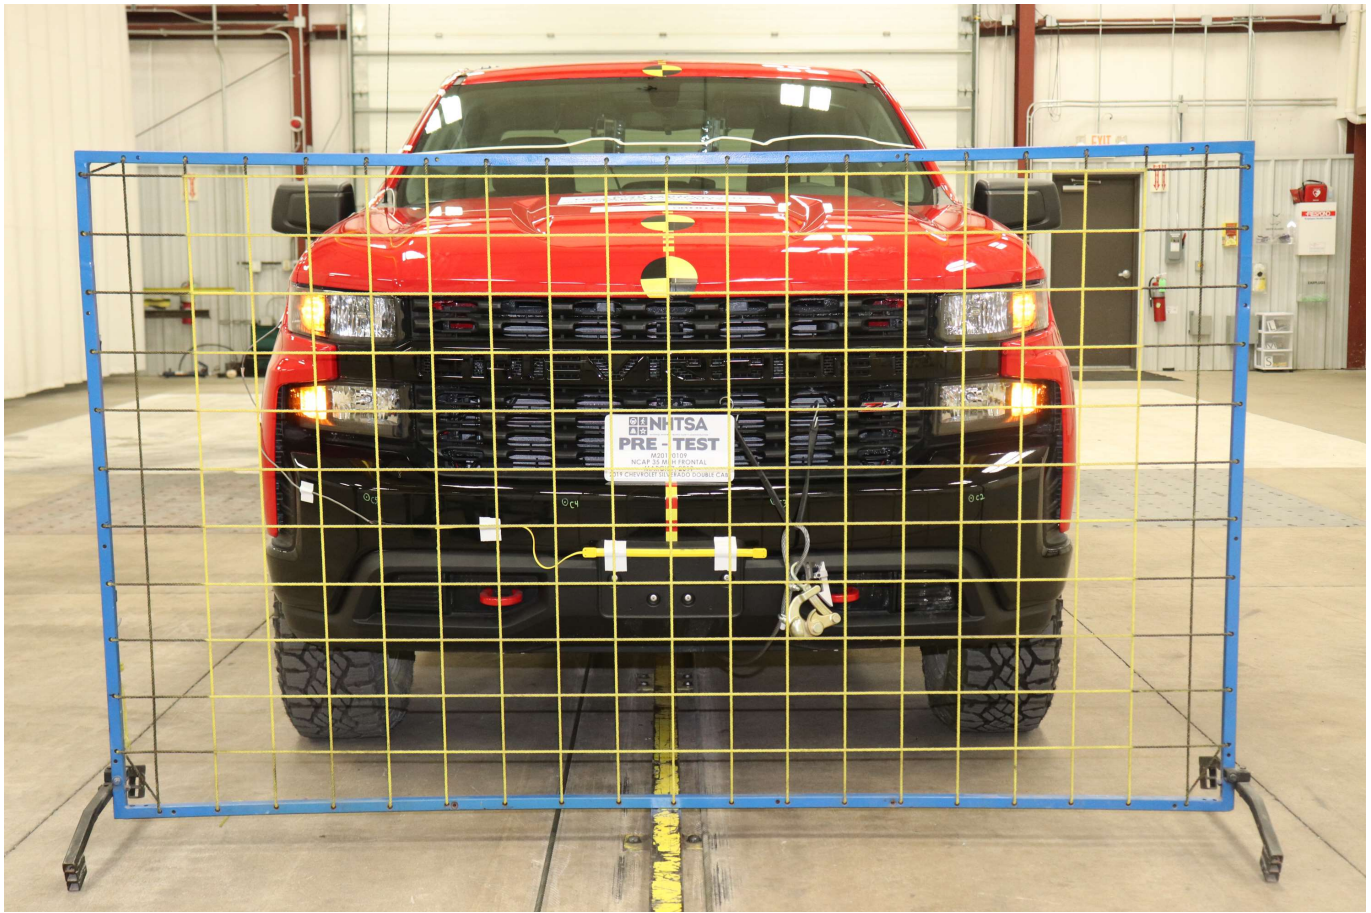


Photo No. 001 - Load Cell Location

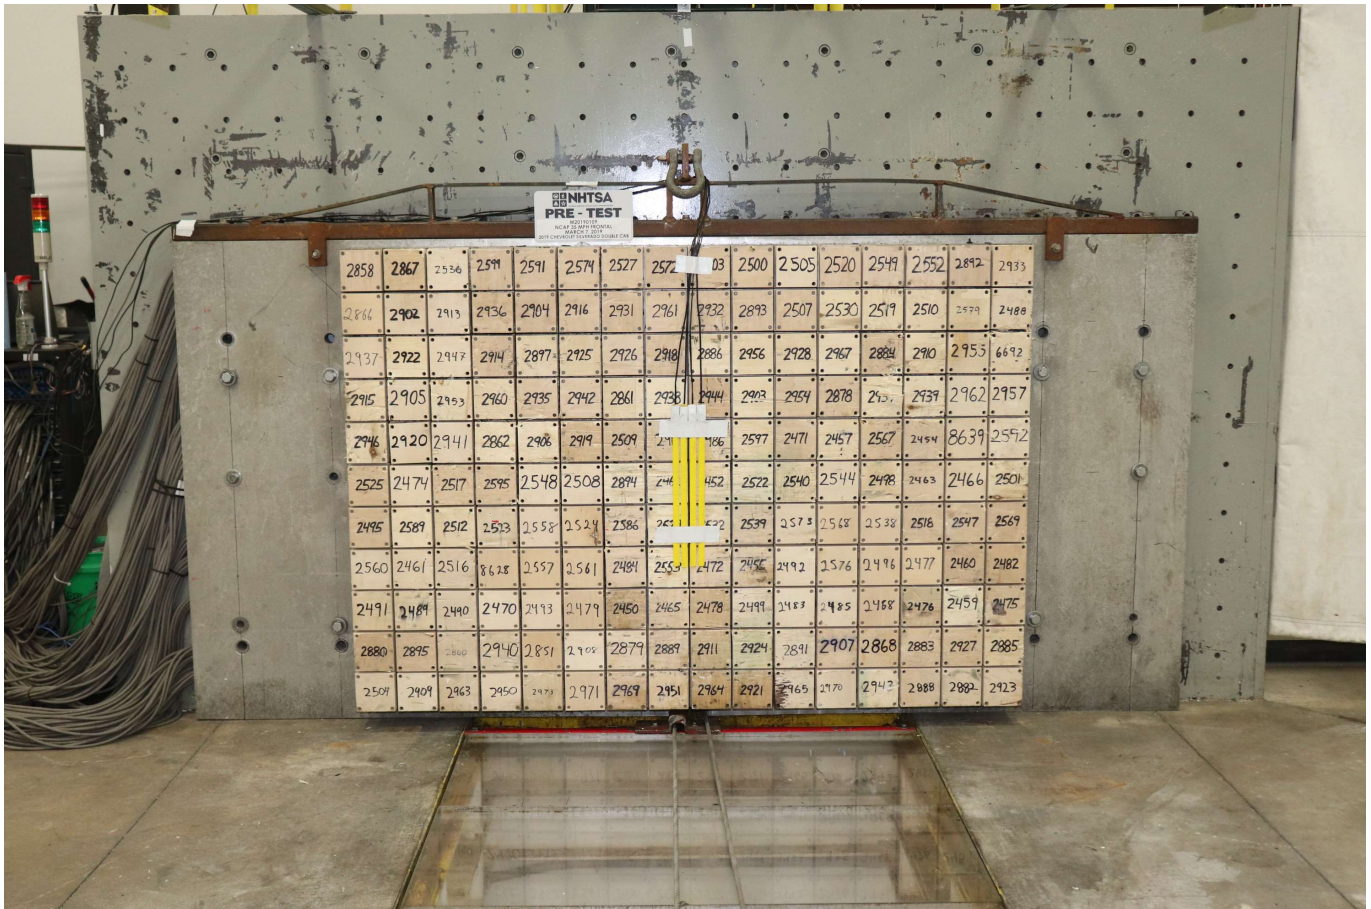


Photo No. 002 - Pre-Test Load Cell Wall



Photo No. 003 - Post-Test Load Cell Wall



Photo No. 004 - Manufacturer Label



Photo No. 005 - Tire Placard



Photo No. 006 - 2019 Chevrolet Silverado Custom TB Double Cab Truck Frontal As Delivered



Photo No. 007 - Left Rear 3-4 View, As Received

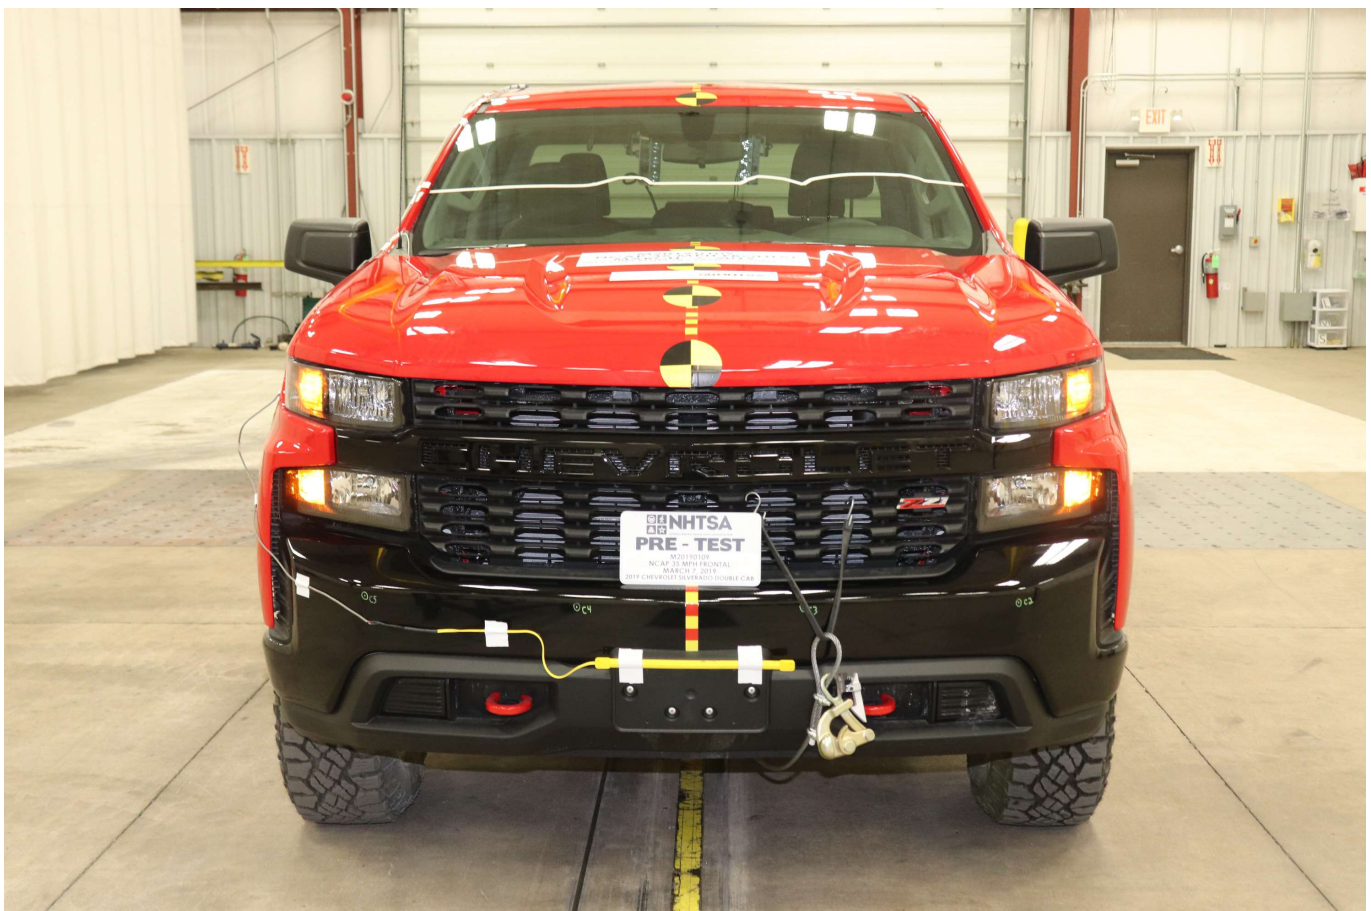


Photo No. 008 - Pre-Test Front View of Test Vehicle



Photo No. 009 - Post-Test Front View of Test Vehicle



Photo No. 010 - Pre-Test Left View of Test Vehicle



Photo No. 011 - Post-Test Left View of Test Vehicle



Photo No. 012 - Pre-Test Right View of Test Vehicle



Photo No. 013 - Post-Test Right View of Test Vehicle



Photo No. 014 - Pre-Test Right Front 3-4 View



Photo No. 015 - Post-Test Right Front 3-4 View



Photo No. 016 - Pre-Test Left Rear 3-4 View



Photo No. 017 - Post-Test Left Rear 3-4 View



Photo No. 018 - Pre-Test Windshield View



Photo No. 019 - Post-Test Windshield View



Photo No. 020 - Pre-Test Engine Compartment View



Photo No. 021 - Post-Test Engine Compartment View



Photo No. 022 - Pre-Test Fuel Filler Cap View



Photo No. 023 - Post-Test Fuel Filler Cap View

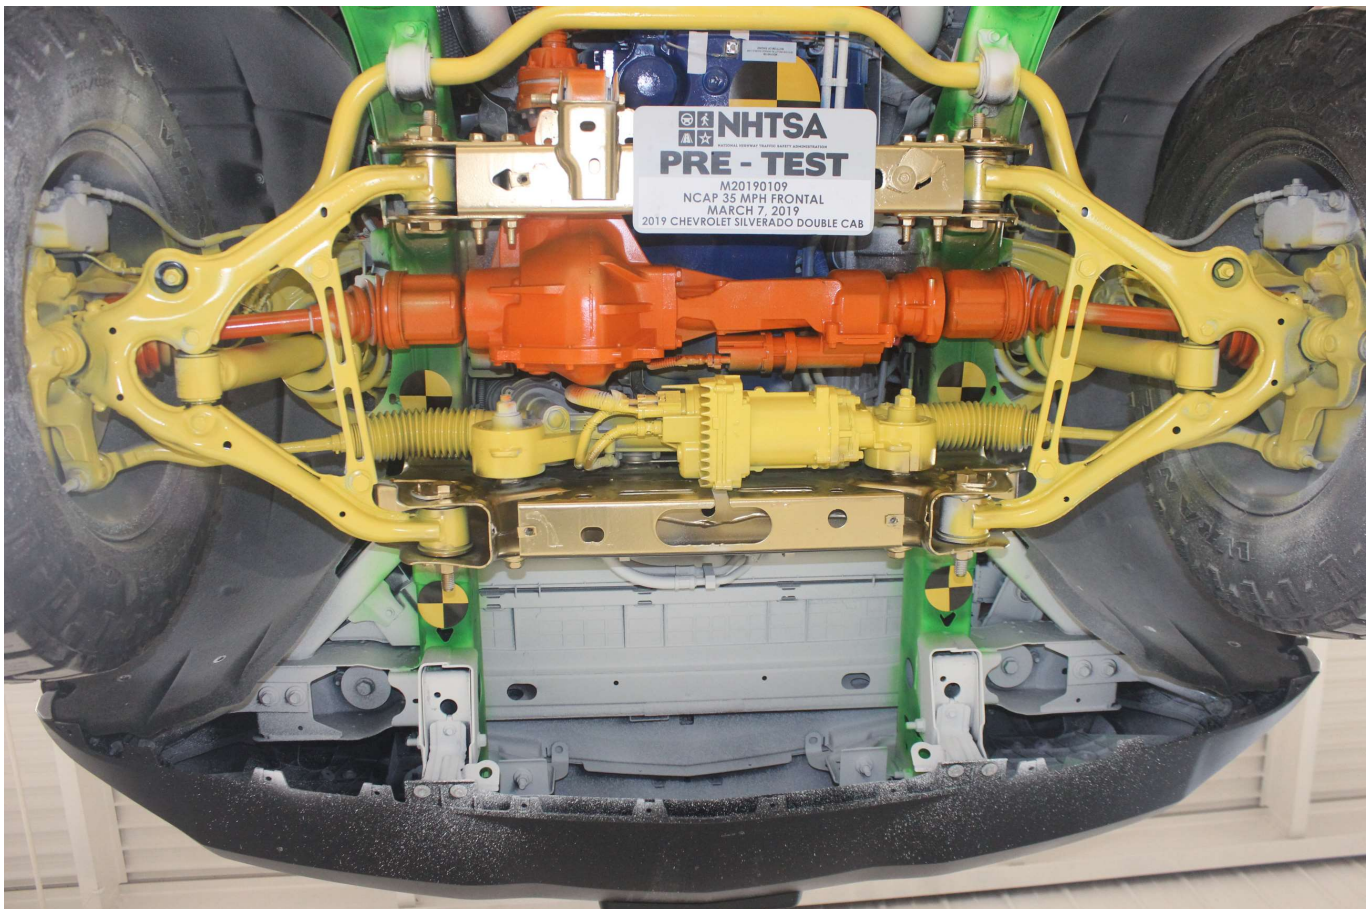


Photo No. 024 - Pre-Test Front Underbody View

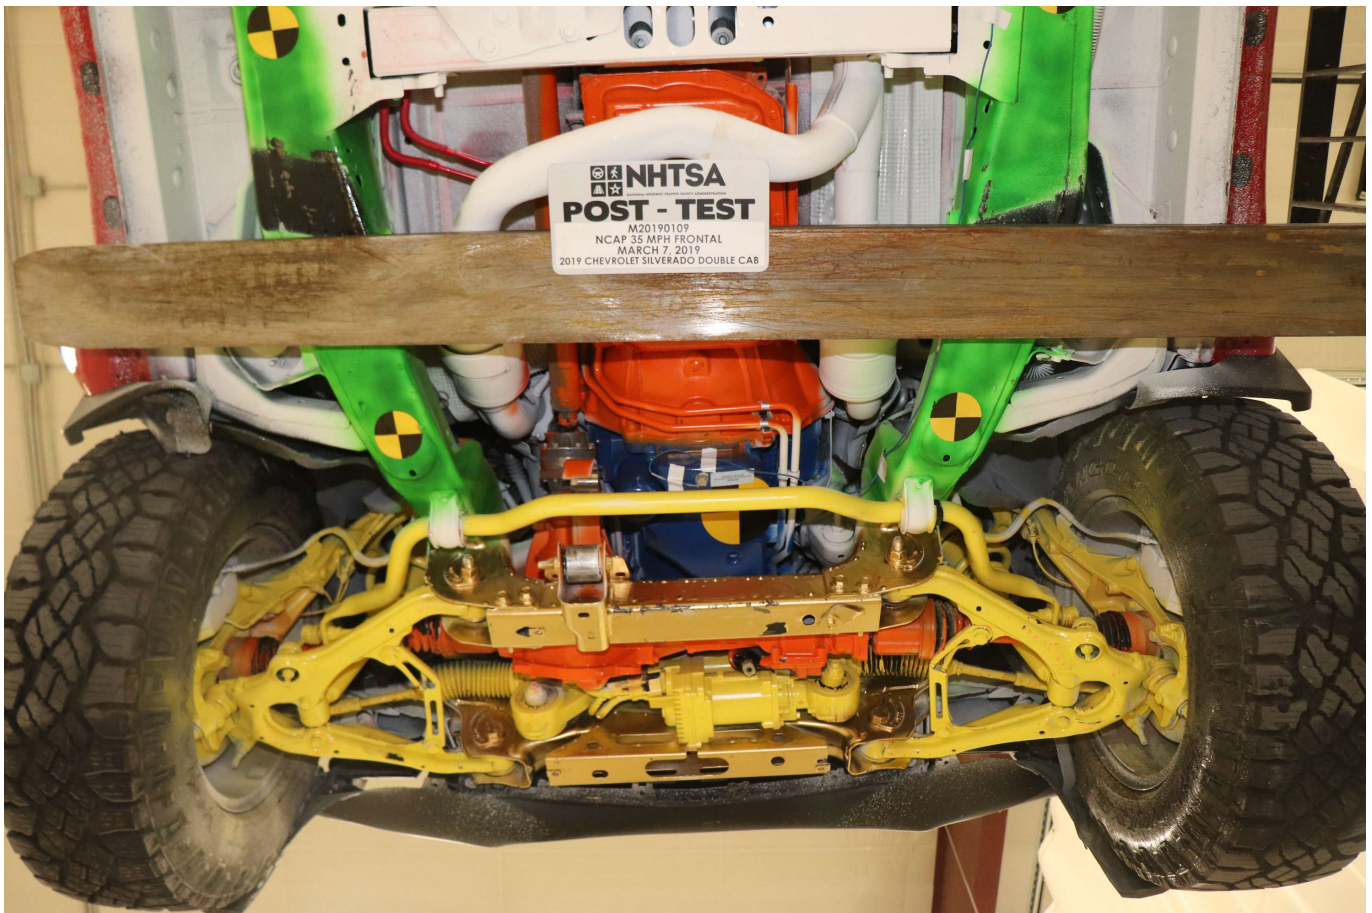


Photo No. 025 - Post-Test Front Underbody View

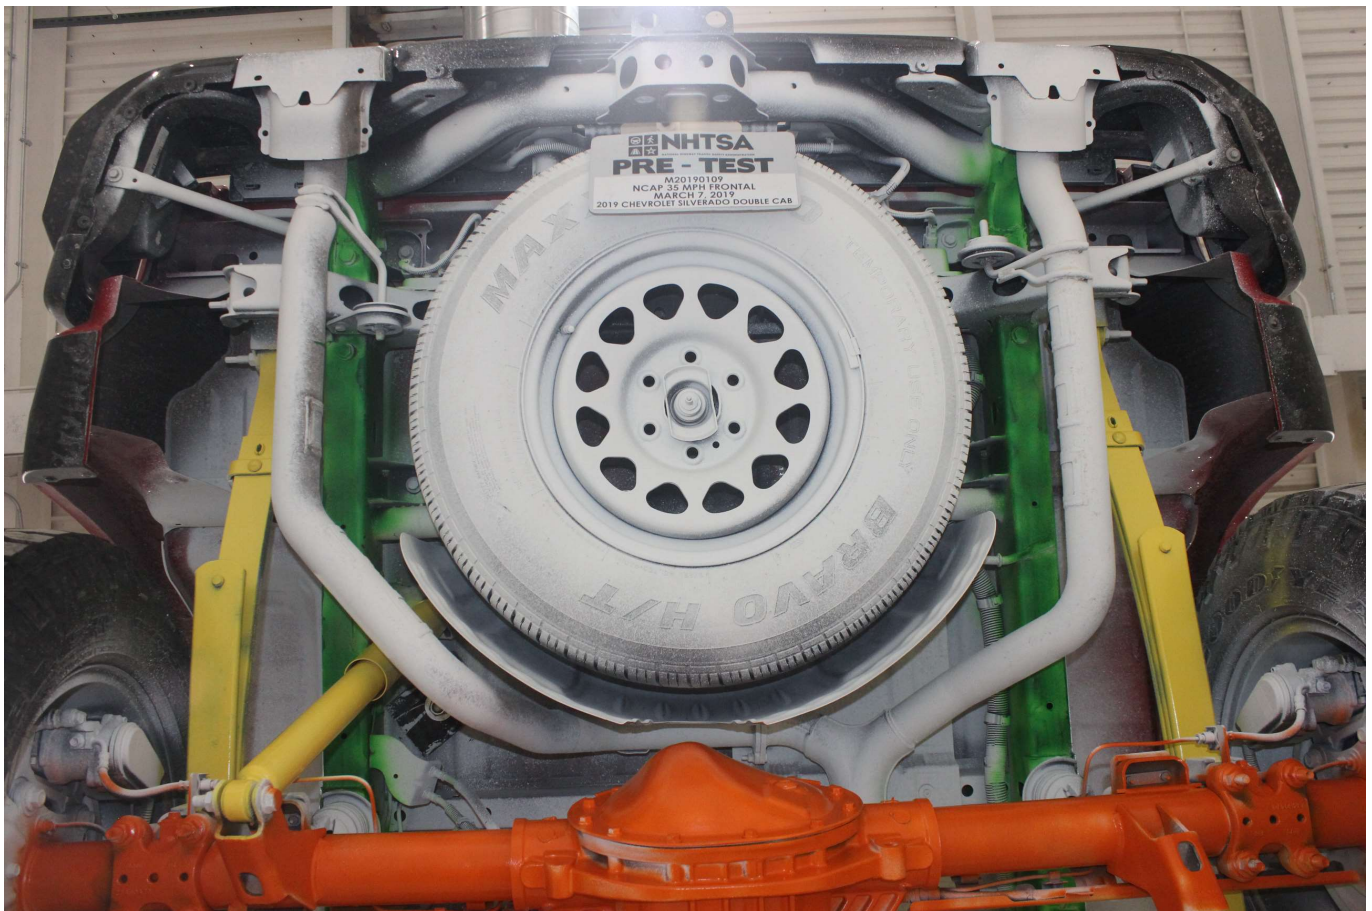


Photo No. 026 - Pre-Test Rear Underbody View

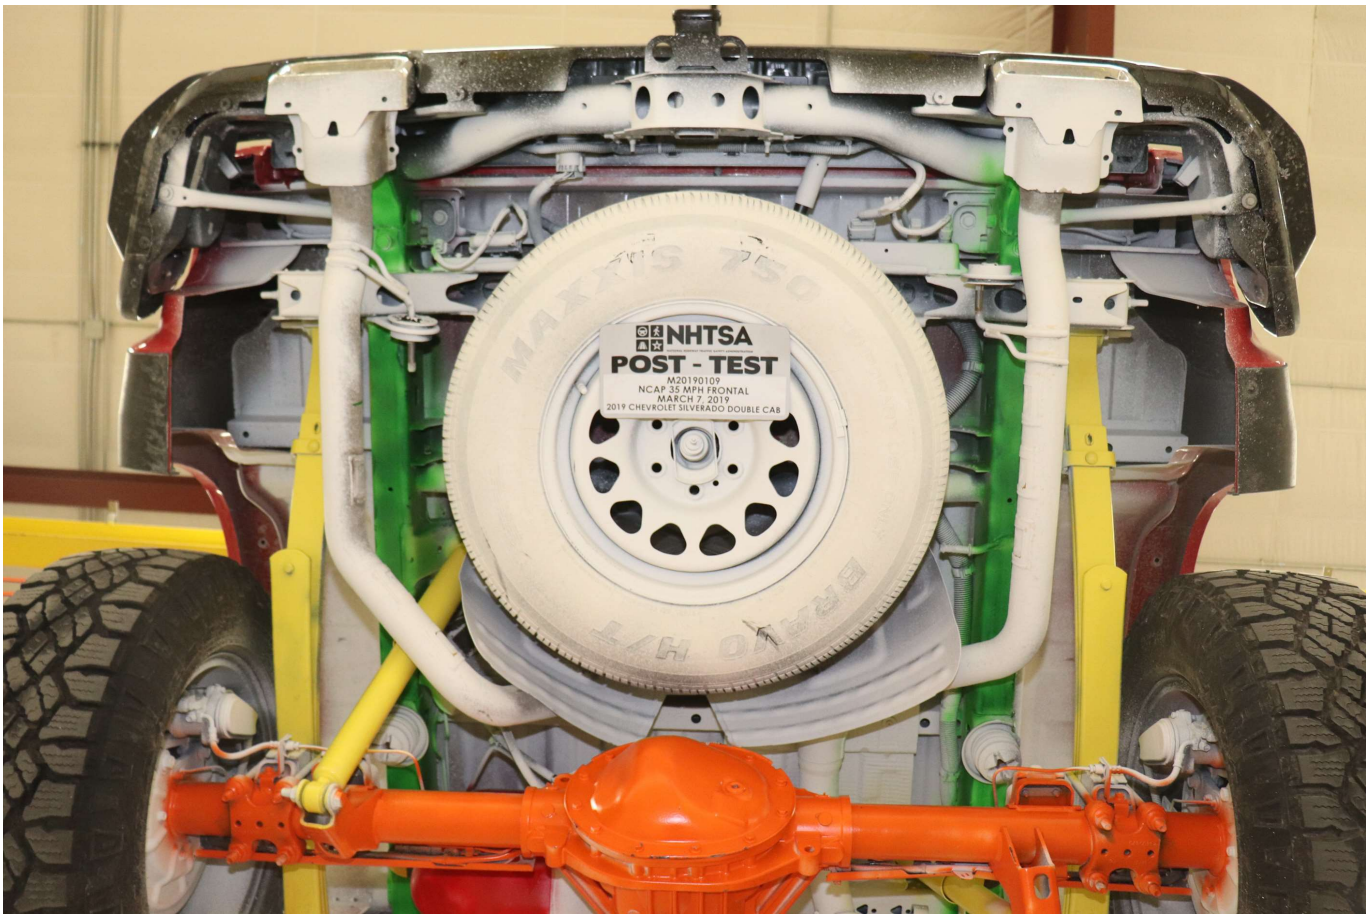


Photo No. 027 - Post-Test Rear Underbody View



Photo No. 028 - Pre-Test Dummy Cable Routing



Photo No. 029 - Post-Test Dummy Cable Routing



Photo No. 030 - Pre-Test Driver Dummy Front View

PHOTOGRAPH NOT AVAILABLE

Photo No. 031 - Post-Test Driver Dummy Front View



Photo No. 032 - Pre-Test Driver Dummy Window View



Photo No. 033 - Post-Test Driver Dummy Window View



Photo No. 034 - Pre-Test Driver Dummy and Vehicle Interior



Photo No. 035 - Post-Test Driver Dummy and Vehicle Interior



Photo No. 036 - Pre-Test Driver Seat Fore-Aft Markings



Photo No. 037 - Post-Test Driver Seat Fore-Aft Markings



Photo No. 038 - Pre-Test View of Belt Anchorage for Driver Dummy



Photo No. 039 - Post-Test View of Belt Anchorage for Driver Dummy



Photo No. 040 - Pre-Test Driver Dummy Feet



Photo No. 041 - Post-Test Driver Dummy Feet



Photo No. 042 - Pre-Test Driver Side Knee Bolster



Photo No. 043 - Post-Test Driver Side Knee Bolster



Photo No. 044 - Pre-Test Driver Side Floorpan

PHOTOGRAPH NOT AVAILABLE

Photo No. 045 - Post-Test Driver Side Floorpan



Photo No. 046 - Post-Test Driver Dummy Face



Photo No. 047 - Post-Test Driver Dummy Contact with Airbag



Photo No. 048 - Post-Test Driver Dummy Contact with Headrest



Photo No. 049 - Pre-Test View of the Steering Wheel



Photo No. 050 - Post-Test View of the Steering Wheel



Photo No. 051 - Pre-Test Passenger Dummy Front View

PHOTOGRAPH NOT AVAILABLE

Photo No. 052 - Post-Test Passenger Dummy Front View



Photo No. 053 - Pre-Test Passenger Dummy Window View



Photo No. 054 - Post-Test Passenger Dummy Window View



Photo No. 055 - Pre-Test Passenger Dummy and Vehicle Interior



Photo No. 056 - Post-Test Passenger Dummy and Vehicle Interior



Photo No. 057 - Pre-Test Passenger Seat Fore-Aft Markings



Photo No. 058 - Post-Test Passenger Seat Fore-Aft Markings



Photo No. 059 - Pre-Test View of Belt Anchorage for Passenger Dummy



Photo No. 060 - Post-Test View of Belt Anchorage for Passenger Dummy



Photo No. 061 - Pre-Test Passenger Dummy Feet



Photo No. 062 - Post-Test Passenger Dummy Feet



Photo No. 063 - Pre-Test Passenger Side Knee Bolster



Photo No. 064 - Post-Test Passenger Side Knee Bolster



Photo No. 065 - Pre-Test Passenger Side Floorpan

PHOTOGRAPH NOT AVAILABLE

Photo No. 066 - Post-Test Passenger Side Floorpan



Photo No. 067 - Post-Test Passenger Dummy Face



Photo No. 068 - Post-Test Passenger Dummy Contact with Airbag



Photo No. 069 - Post-Test Passenger Dummy Contact with Headrest



Photo No. 070 - Ballast Installed in Vehicle

PHOTOGRAPH NOT APPLICABLE

Photo No. 071 - Post-Test Stoddard Solvent Spillage Location View



Photo No. 072 - Post-Test Speed Trap Read-Out



Photo No. 073 - Vehicle at 0 Degree on Static Rollover Device



Photo No. 074 - Vehicle at 90 Degrees on Static Rollover Device



Photo No. 075 - Vehicle at 180 Degrees on Static Rollover Device

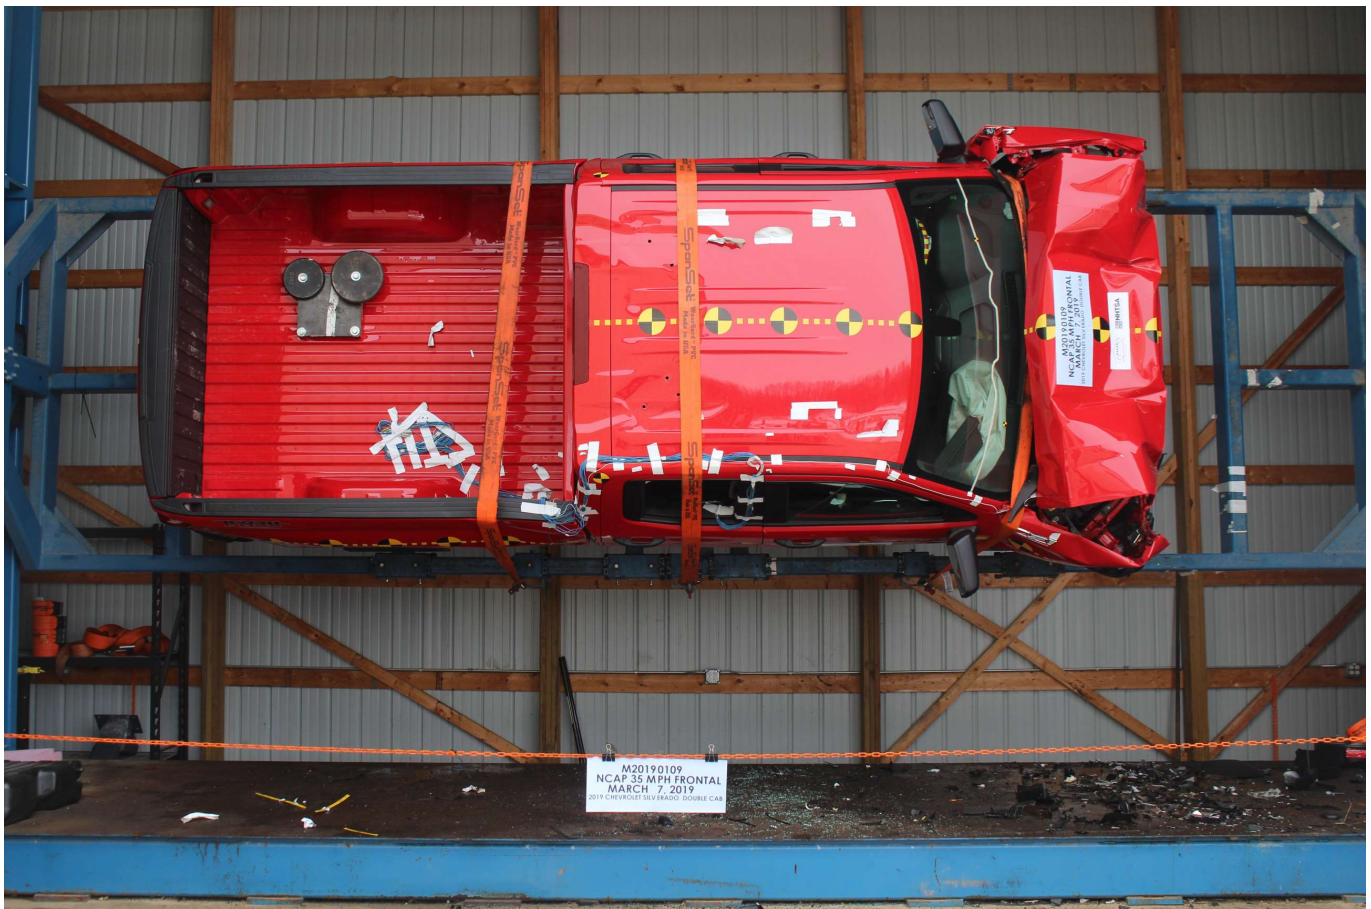


Photo No. 076 - Vehicle at 270 Degrees on Static Rollover Device



Photo No. 077 - Vehicle at 360 Degrees on Static Rollover Device



Photo No. 078 - 2019 Chevrolet Silverado Custom TB Double Cab Truck Frontal Impact Event



2019 SILVERADO 4WD CUSTOM TB DBL

**EXTERIOR: RED HOT
INTERIOR: JET BLACK**

**ENGINE, 5.3L ECOTEC3 V8
TRANSMISSION, 6-SPEED AUTOMATIC**

Visit us at www.chevy.com

STANDARD EQUIPMENT

ITEMS FEATURED BELOW ARE INCLUDED AT NO EXTRA CHARGE IN THE STANDARD VEHICLE PRICE SHOWN

- 3 YR/36,000 MILES BUMPER-TO-BUMPER WARRANTY
- 5 YR/60,000 MILES POWERTRAIN LIMITED WARRANTY
- ROADSIDE ASSISTANCE
- COURTESY TRANSPORTATION
- FIRST MAINTENANCE VISIT
- OIL CHANGE AND TIRE ROTATION
- MULTI POINT VEHICLE INSPECTION
- SEE CHEVY.COM OR DEALER FOR TERMS, DETAILS & LIMITS

MECHANICAL

- CAPLESS FUEL FILL
- 2-SPD TRANSFER CASE W/ AUTOTRAC
- TRAILERING PACKAGE
 - TRAILER HITCH
 - 7 PIN AND 4 PIN CONNECTORS
 - HITCH GUIDANCE
- OFF-ROAD SUSPENSION WITH

2 INCH LIFT

- Z71 OFF-ROAD PACKAGE:
 - RANCHO (R) MONOTUBE SHOCKS
 - HILL DESCENT CONTROL
 - SKID PLATE
 - HEAVY-DUTY AIR CLEANER
 - AUTO LOCKING REAR DIFFERENTIAL

SAFETY & SECURITY

- REAR VISION CAMERA
- TEEN DRIVER MODE
- STABILTRAK W/ TRAILER SWAY CONTROL & HILL START ASSIST

EXTERIOR

- 12 FIXED DURABLE TIE DOWNS W/ EACH CORNER RATED AT 500LBS
- CARGO AREA LAMP
- DUAL EXHAUST WITH BRIGHT TRIM
- CORNERSTEP REAR BUMPER
- RED FRONT RECOVERY HOOKS
- FRONT BLACK BOWTIE
- POWER ADJUSTABLE HEATED

OUTSIDE MIRRORS

- HALOGEN REFLECTOR HEADLAMPS
- LED SIGNATURE TAIL LAMPS
- LED FRONT FOG LAMPS
- HALOGEN DAYTIME RUNNING LAMPS
- GOODYEAR WRANGLER DURATRAC (R) TIRES

INTERIOR

- 40/20/40 SPLIT BENCH FRONT SEATS
- FRONT DRIVER AND PASSENGER 4-WAY SEAT ADJUSTER
- 60/40 FOLDING REAR BENCH SEAT
- REAR SEAT REMINDER
- REMOTE KEYLESS ENTRY
- POWER WINDOWS: EXPRESS UP & DOWN DRIVER, EXPRESS DOWN FRONT PASSENGER & REAR
- REAR HVAC VENTS
- STEERING COLUMN, TILT-WHEEL
- SINGLE ZONE CLIMATE CONTROL

- FRONT 12V AUX POWER OUTLET
- CHEVROLET INFOTAINMENT 3 7" DIAG COLOR TOUCHSCREEN
- ADDITIONAL FEATURES FOR COMPATIBLE PHONES INCLUDE:
 - BLUETOOTH AUDIO STREAMING
 - VOICE COMMAND PASSTHROUGH TO PHONE, ANDROID AUTO & APPLE CARPLAY CAPABLE

OPTIONS & PRICING

MANUFACTURER'S SUGGESTED RETAIL PRICE
STANDARD VEHICLE PRICE \$39,500.00

OPTIONS INSTALLED BY THE MANUFACTURER (MAY REPLACE STANDARD EQUIPMENT SHOWN)

- ENGINE, 5.3L ECOTEC3 V8 1,395.00
- WITH ACTIVE FUEL MANAGEMENT
- CUSTOM CONVENIENCE PACKAGE 800.00
- REMOTE VEHICLE STARTER SYSTEM
- THEFT-DETERRENT SYSTEM
- REAR-WINDOW DEFOGGER

ELECTRIC

- LED CARGO AREA LIGHTING
- TAILGATE, WITH LIFT ASSIST INCLUDES AND POWER LOCK
- GWR, 6,900 LBS. (3,130 KG) INC.
- REAR AXLE 3.42 RATIO INC.
- 18" HIGH GLOSS BLACK PAINTED ALUMINUM WHEELS INC.

TOTAL OPTIONS \$2,195.00
TOTAL VEHICLE & OPTIONS \$41,695.00
DESTINATION CHARGE 1,495.00

TOTAL VEHICLE PRICE* \$43,190.00

EPA DOT Fuel Economy and Environment

Fuel Economy

16 MPG
combined city/hwy

14 city
18 highway


6.2 gallons per 100 miles

Standard pickup trucks range from 14 to 22 MPG. The best vehicle rates 136 MPG.

You spend \$5,000 more in fuel costs over 5 years compared to the average new vehicle.

Annual fuel cost \$2,400

Fuel Economy & Greenhouse Gas Rating (tailpipe only) **Smog Rating** (tailpipe only)



Actual results will vary for many reasons, including driving conditions and how you drive and maintain your vehicle. The average new vehicle gets 27 MPG and costs \$7,000 to fuel over 5 years. Cost estimates are based on 15,000 miles per year at \$2.55 per gallon. MPG is miles per gasoline gallon equivalent. Vehicle emissions are a significant cause of climate change and smog.

fuelconomy.gov
Calculate personalized estimates and compare vehicles



GOVERNMENT 5-STAR SAFETY RATINGS

This vehicle has not been rated by the government for overall vehicle score, frontal crash, side crash or rollover risk.

Source: National Highway Traffic Safety Administration (NHTSA)
www.safercar.gov or 1-888-327-4236

PARTS CONTENT INFORMATION

FOR VEHICLES IN THIS CARLINE:
U.S./CANADIAN PARTS CONTENT: 42%
MAJOR SOURCES OF FOREIGN PARTS CONTENT: MEXICO 46%

NOTE: PARTS CONTENT DOES NOT INCLUDE FINAL ASSEMBLY, DISTRIBUTION, OR OTHER NON-PARTS COSTS.

FOR THIS VEHICLE:
FINAL ASSEMBLY POINT: ROANOKE, IN U.S.A.
COUNTRY OF ORIGIN: ENGINE: UNITED STATES
TRANSMISSION: UNITED STATES

This label has been applied pursuant to Federal law - Do not remove prior to delivery to the ultimate purchaser. Includes Manufacturer's Recommended Pre-Delivery Service. Does not include dealer installed options and accessories not listed above, local taxes or license fees.

© 2009 General Motors LLC
GM/BL, PRCD, 0038 - 07/22/2018

ORDER NO WKKGHG SALES CODE E
SALES MODEL CODE CR10738
DEALER NO 47627

FINAL ASSEMBLY: ROANOKE, IN U.S.A.

VIN 1GCRYCF8KZ183385

REISSUE

DEALER TO WHOM DELIVERED
BALLWEG CHEVROLET-BUICK, INC.
783 PHILLIPS BLVD
SAUK CITY, WI 53583-1301

Photo No. 079 - Monroney Label Photograph

APPENDIX B
DUMMY RESPONSE DATA TRACES

TABLE OF DATA PLOTS

Page No.

List of Data Plots Provided in the Test Report

Figure No. 1.	Driver Head X Acceleration vs. Time	B-1
Figure No. 2.	Driver Head Y Acceleration vs. Time	B-1
Figure No. 3.	Driver Head Z Acceleration vs. Time	B-1
Figure No. 4.	Driver Head Resultant Acceleration vs. Time	B-1
Figure No. 5.	Driver Chest Displacement vs. Time	B-2
Figure No. 6.	Driver Chest X Acceleration vs. Time	B-3
Figure No. 7.	Driver Chest Y Acceleration vs. Time	B-3
Figure No. 8.	Driver Chest Z Acceleration vs. Time	B-3
Figure No. 9.	Driver Chest Resultant Acceleration vs. Time	B-3
Figure No. 10.	Driver Neck Force X vs. Time	B-4
Figure No. 11.	Driver Neck Force Z vs. Time	B-4
Figure No. 12.	Driver Neck Moment Y vs. Time	B-4
Figure No. 13.	Driver Nij (NTF) vs. Time	B-5
Figure No. 14.	Driver Nij (NTE) vs. Time	B-5
Figure No. 15.	Driver Nij (NCF) vs. Time	B-5
Figure No. 16.	Driver Nij (NCE) vs. Time	B-5
Figure No. 17.	Driver Left Femur Force vs. Time	B-6
Figure No. 18.	Driver Right Femur Force vs. Time	B-6
Figure No. 19.	Passenger Head X Acceleration vs. Time	B-7
Figure No. 20.	Passenger Head Y Acceleration vs. Time	B-7
Figure No. 21.	Passenger Head Z Acceleration vs. Time	B-7
Figure No. 22.	Passenger Head Resultant Acceleration vs. Time	B-7
Figure No. 23.	Passenger Chest Displacement vs. Time	B-8
Figure No. 24.	Passenger Chest X Acceleration vs. Time	B-9
Figure No. 25.	Passenger Chest Y Acceleration vs. Time	B-9
Figure No. 26.	Passenger Chest Z Acceleration vs. Time	B-9
Figure No. 27.	Passenger Chest Resultant Z Acceleration vs. Time	B-9



	<u>Page No.</u>
Figure No. 28. Passenger Neck Force X vs. Time	B-10
Figure No. 29. Passenger Neck Force Z vs. Time	B-10
Figure No. 30. Passenger Neck Moment Y vs. Time	B-10
Figure No. 31. Passenger Nij (NTF) vs. Time	B-11
Figure No. 32. Passenger Nij (NTE) vs. Time	B-11
Figure No. 33. Passenger Nij (NCF) vs. Time	B-11
Figure No. 34. Passenger Nij (NCE) vs. Time	B-11
Figure No. 35. Passenger Left Femur Force vs. Time	B-12
Figure No. 36. Passenger Right Femur Force vs. Time	B-12

The following additional dummy and vehicle response data can be found in the R&D section of the NHTSA website at www.nhtsa.gov


Driver Head X Redundant
 Driver Head Y Redundant
 Driver Head Z Redundant
 Driver Head Angular Velocity X
 Driver Head Angular Velocity Y
 Driver Head Angular Velocity Z
 Driver Upper Neck Force Y
 Driver Upper Neck Moment X
 Driver Upper Neck Moment Z
 Driver Chest X Redundant
 Driver Chest Y Redundant
 Driver Chest Z Redundant
 Driver Pelvis X
 Driver Pelvis Y
 Driver Pelvis Z
 Driver Left Femur Redundant
 Driver Right Femur Redundant
 Driver Left Upper Tibia Moment X
 Driver Left Upper Tibia Moment Y

Driver Left Upper Tibia Force Z
Driver Left Lower Tibia Moment X
Driver Left Lower Tibia Moment Y
Driver Left Lower Tibia Force Z
Driver Right Upper Tibia Moment X
Driver Right Upper Tibia Moment Y
Driver Right Upper Tibia Force Z
Driver Right Lower Tibia Moment X
Driver Right Lower Tibia Moment Y
Driver Right Lower Tibia Force Z
Driver Left Foot Fore Z
Driver Left Foot Aft X
Driver Left Foot Aft Z
Driver Right Foot Fore Z
Driver Right Foot Aft X
Driver Right Foot Aft Z
Driver Lap Belt Force
Driver Shoulder Belt Force
Passenger Head X Redundant
Passenger Head Y Redundant
Passenger Head Z Redundant
Passenger Head Angular Velocity X
Passenger Head Angular Velocity Y
Passenger Head Angular Velocity Z
Passenger Upper Neck Force Y
Passenger Upper Neck Moment X
Passenger Upper Neck Moment Z
Passenger Chest X Redundant
Passenger Chest Y Redundant
Passenger Chest Z Redundant
Passenger Pelvis X
Passenger Pelvis Y


Passenger Pelvis Z
Passenger Left Femur Redundant
Passenger Right Femur Redundant
Passenger Left Upper Tibia Moment X
Passenger Left Upper Tibia Moment Y
Passenger Left Upper Tibia Force Z
Passenger Left Lower Tibia Moment X
Passenger Left Lower Tibia Moment Y
Passenger Left Lower Tibia Force Z
Passenger Right Upper Tibia Moment X
Passenger Right Upper Tibia Moment Y
Passenger Right Upper Tibia Force Z
Passenger Right Lower Tibia Moment X
Passenger Right Lower Tibia Moment Y
Passenger Right Lower Tibia Force Z
Passenger Left Foot Fore Z
Passenger Left Foot Aft X
Passenger Left Foot Aft Z
Passenger Right Foot Fore Z
Passenger Right Foot Aft X
Passenger Right Foot Aft Z
Passenger Lap Belt Force
Passenger Shoulder Belt Force
Left Rear Seat Crossmember X
Right Rear Seat Crossmember X
Vehicle Engine Top X
Vehicle Engine Bottom X
Left Rear Seat Crossmember Z
Right Rear Seat Crossmember Z
Left Rear Seat Crossmember Xr
Right Rear Seat Crossmember Xr
Advanced Research Load Cell Barrier – 528 channels

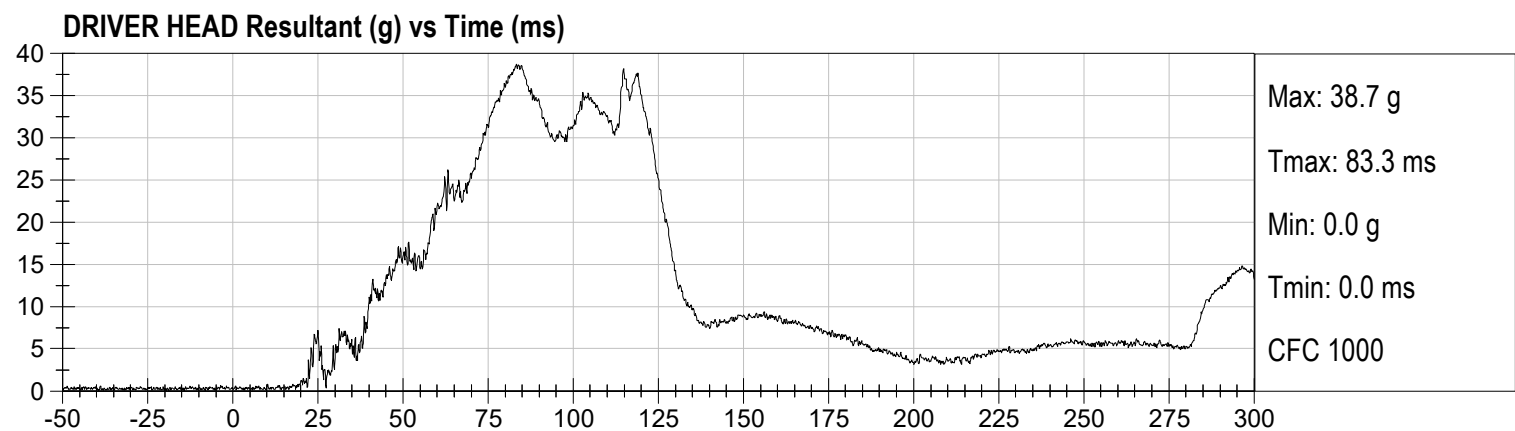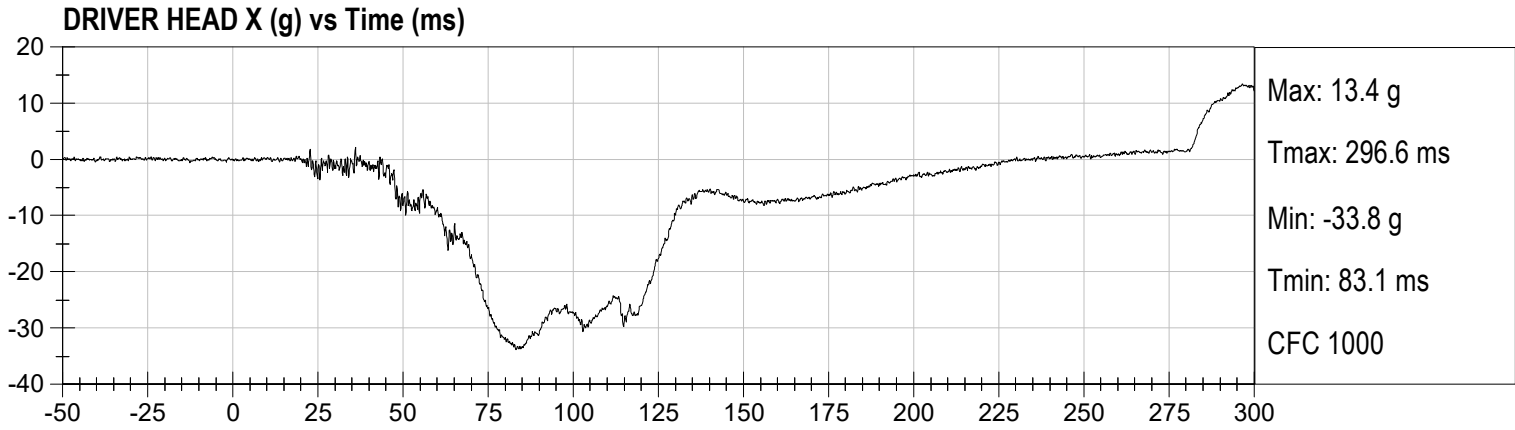

DRIVER CHEST DISPLACEMENT (mm) vs Time (ms)

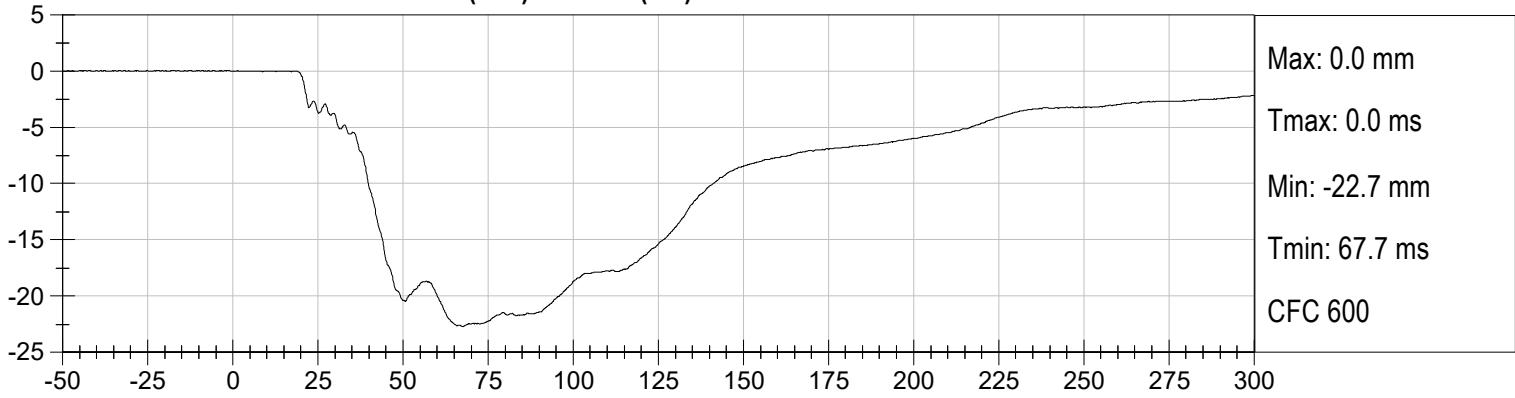

DRIVER CHEST X (g) vs Time (ms)

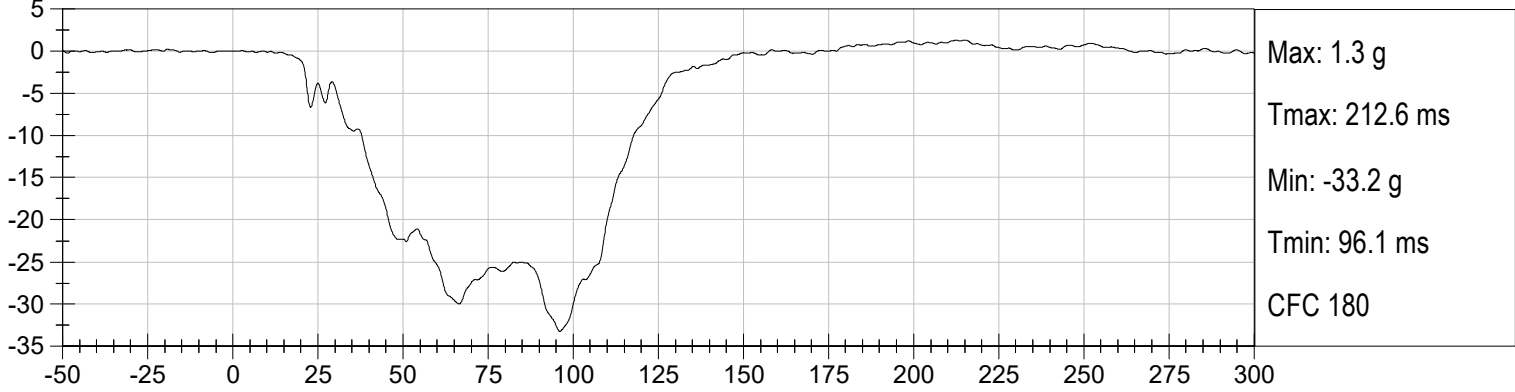


DRIVER CHEST Y (g) vs Time (ms)




DRIVER CHEST Z (g) vs Time (ms)




DRIVER CHEST Resultant (g) vs Time (ms)

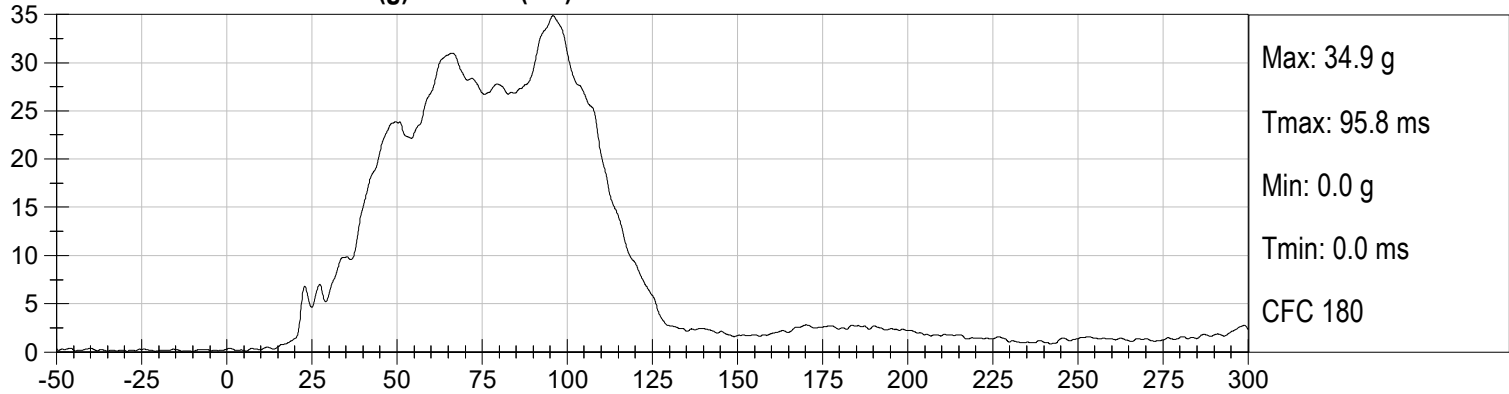


DRIVER NECK FX (N) vs Time (ms)



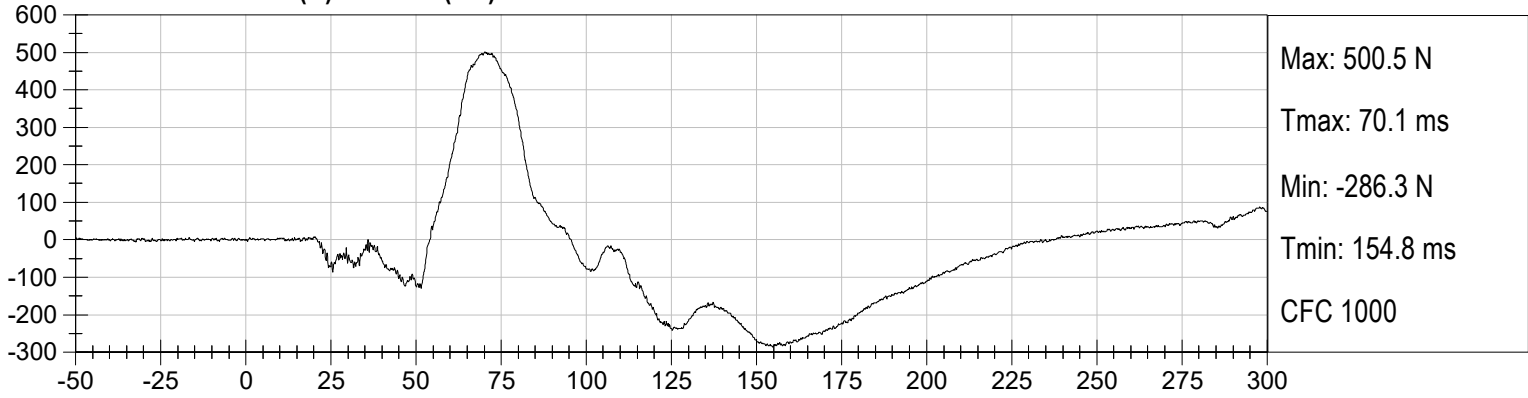




DRIVER NECK FZ (N) vs Time (ms)

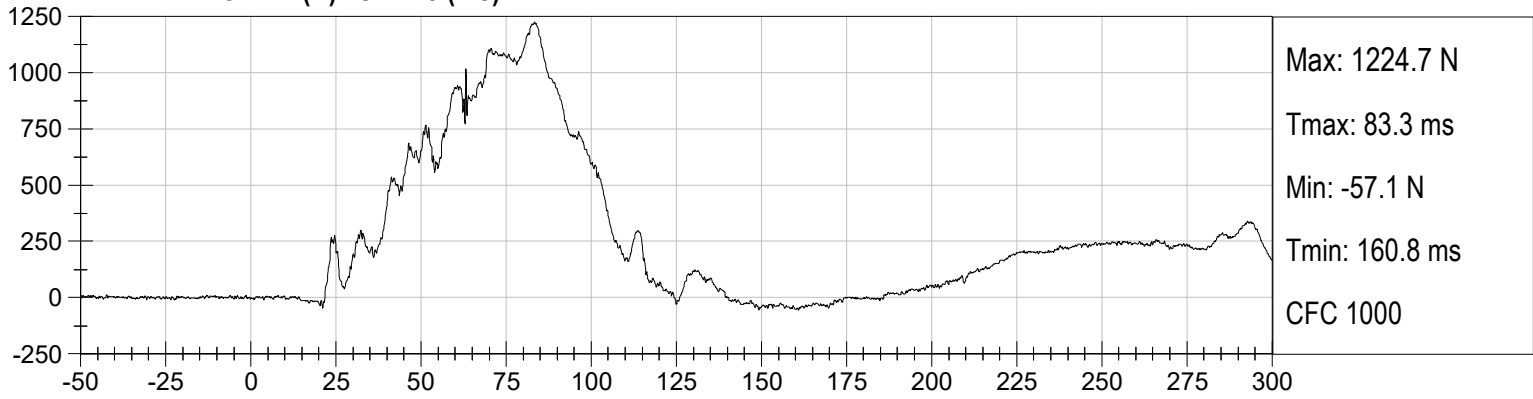


DRIVER NECK MY (Nm) vs Time (ms)

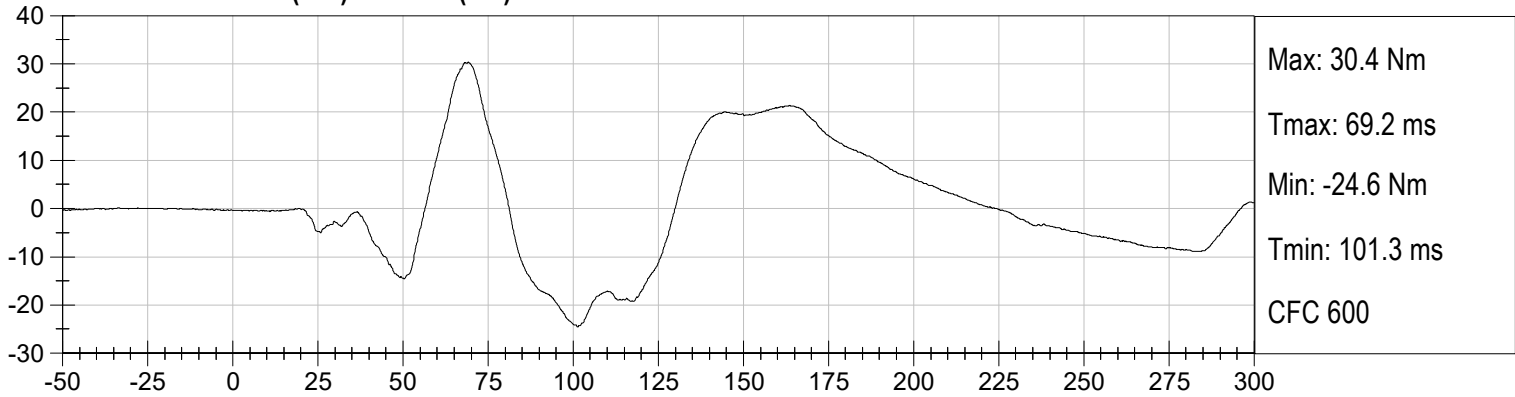

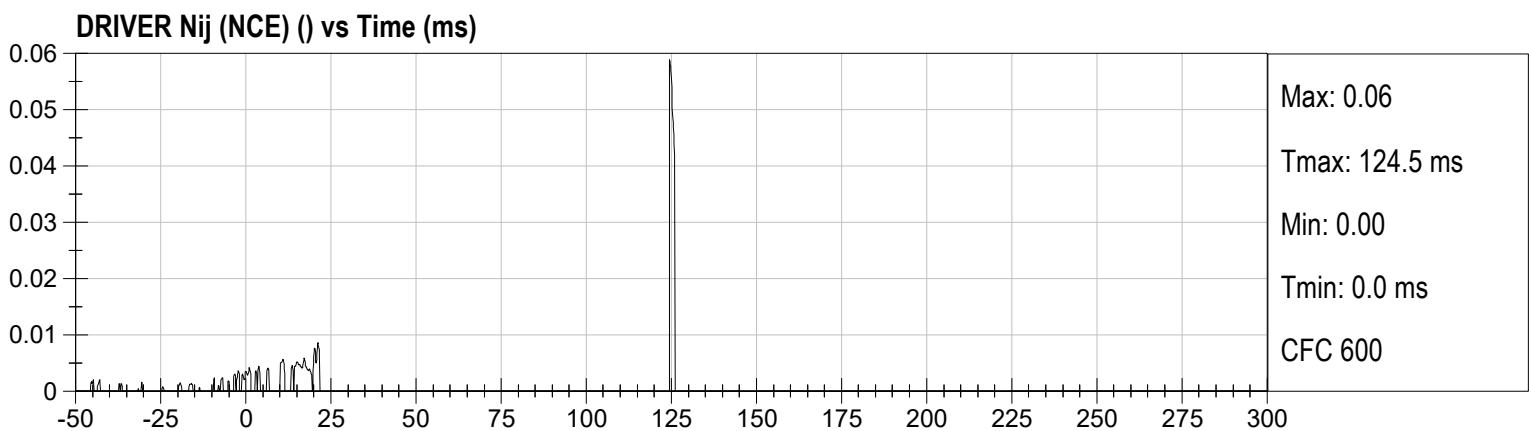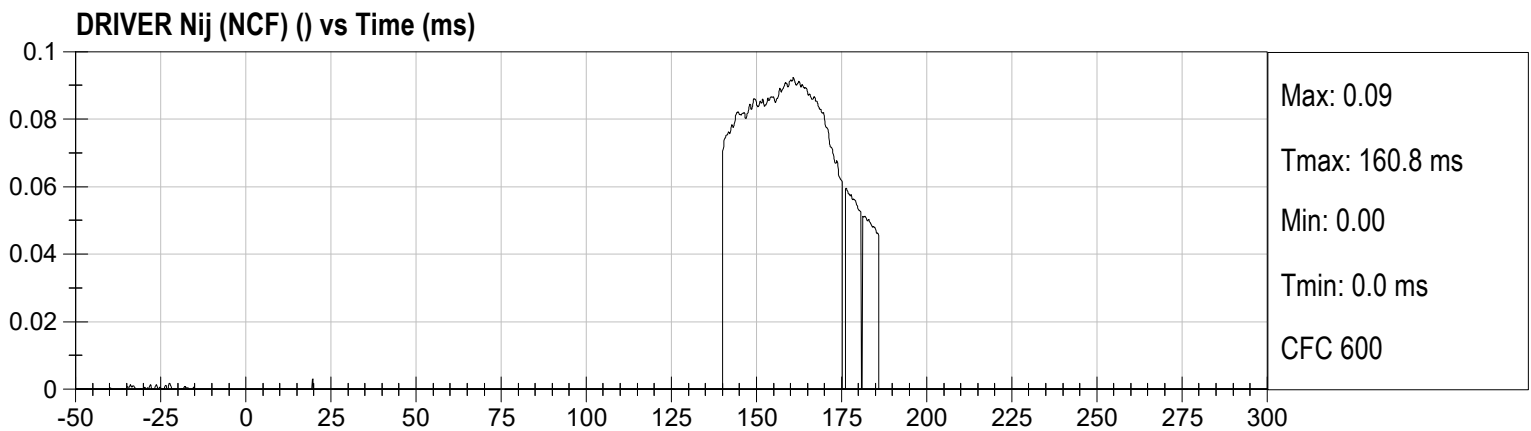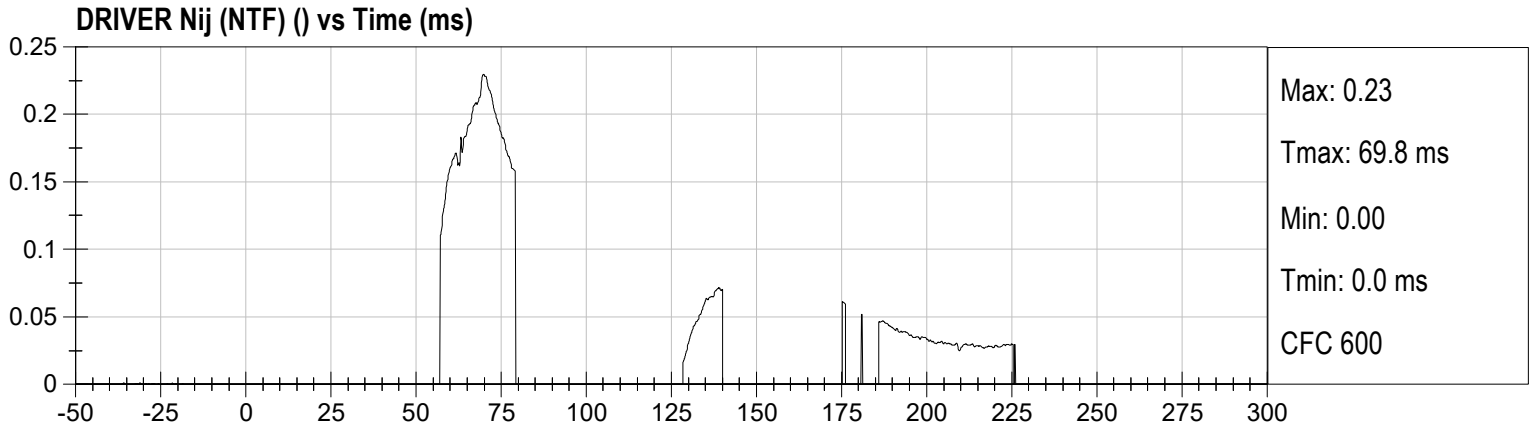


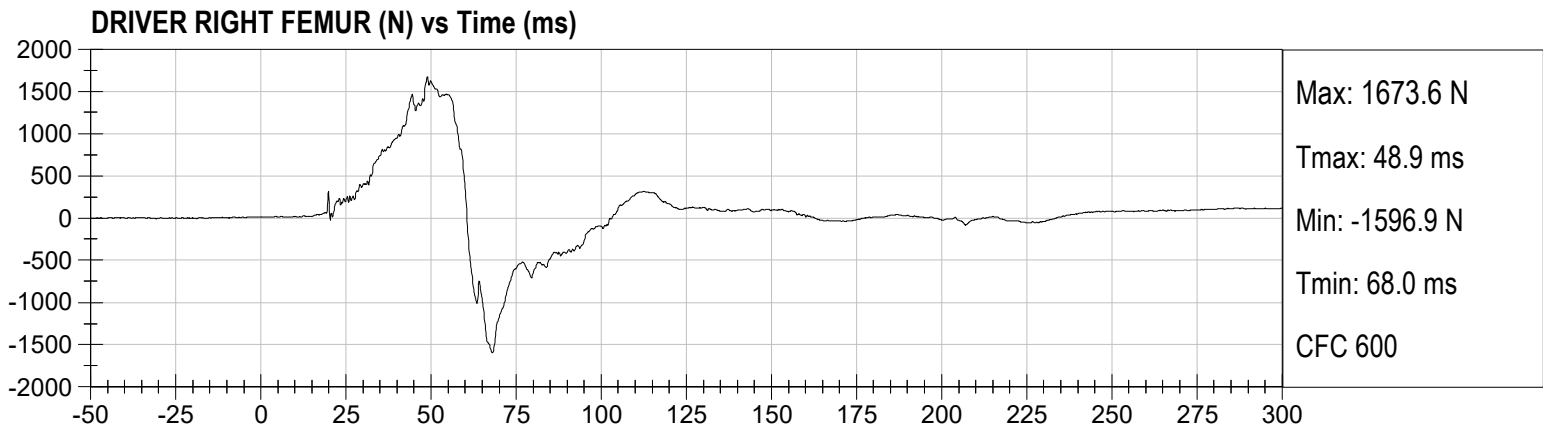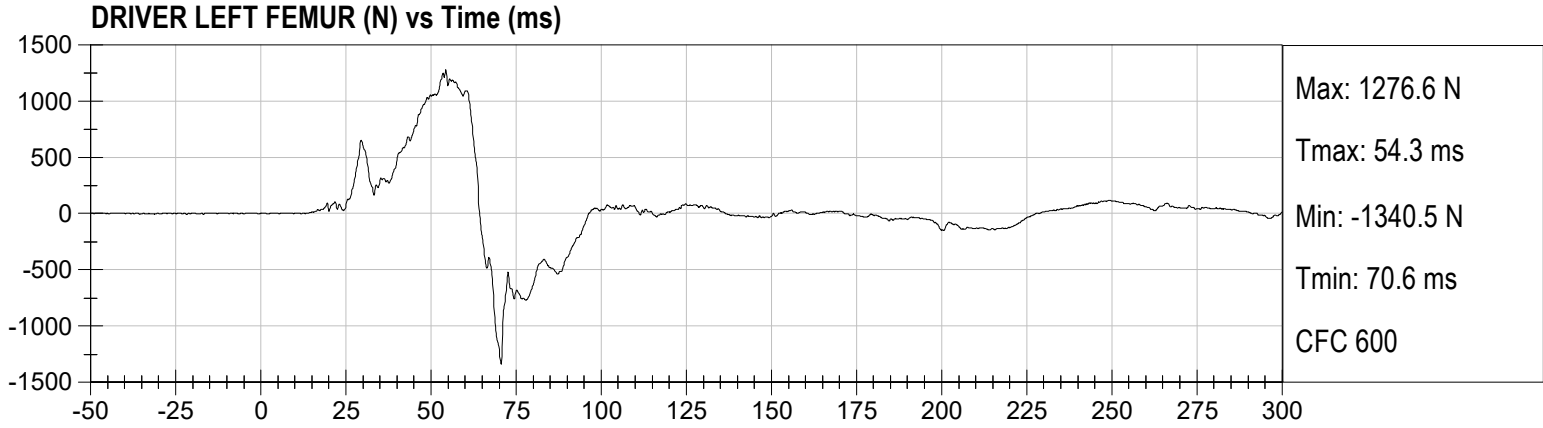


PASSENGER HEAD X (g) vs Time (ms)

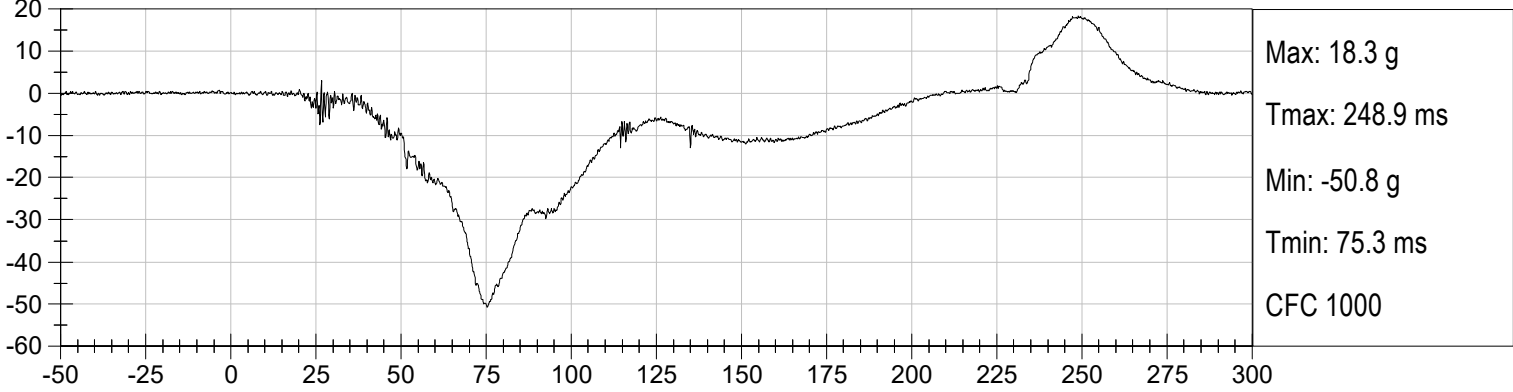


PASSENGER HEAD Y (g) vs Time (ms)

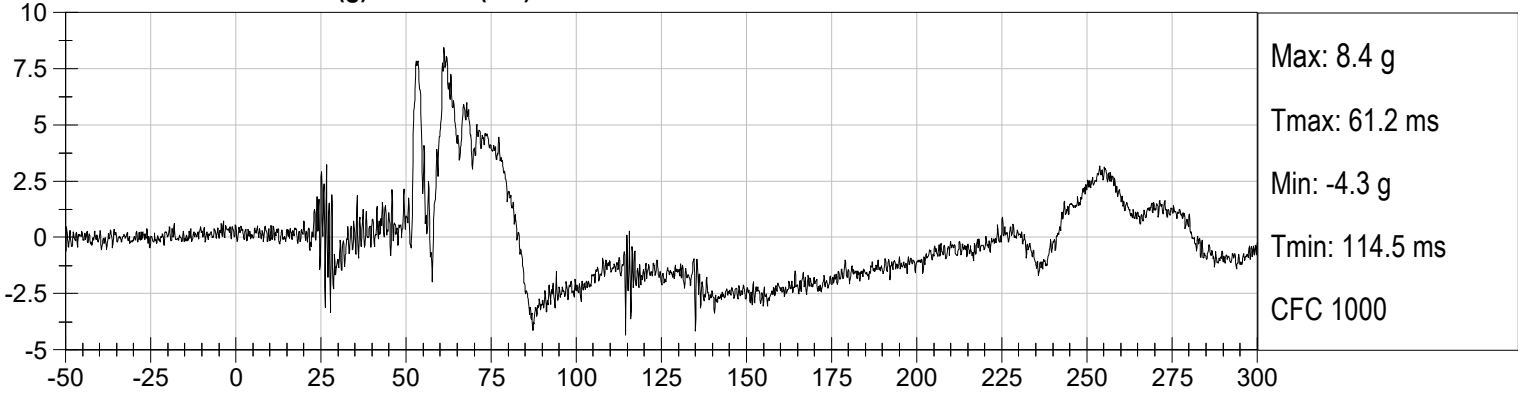


PASSENGER HEAD Z (g) vs Time (ms)

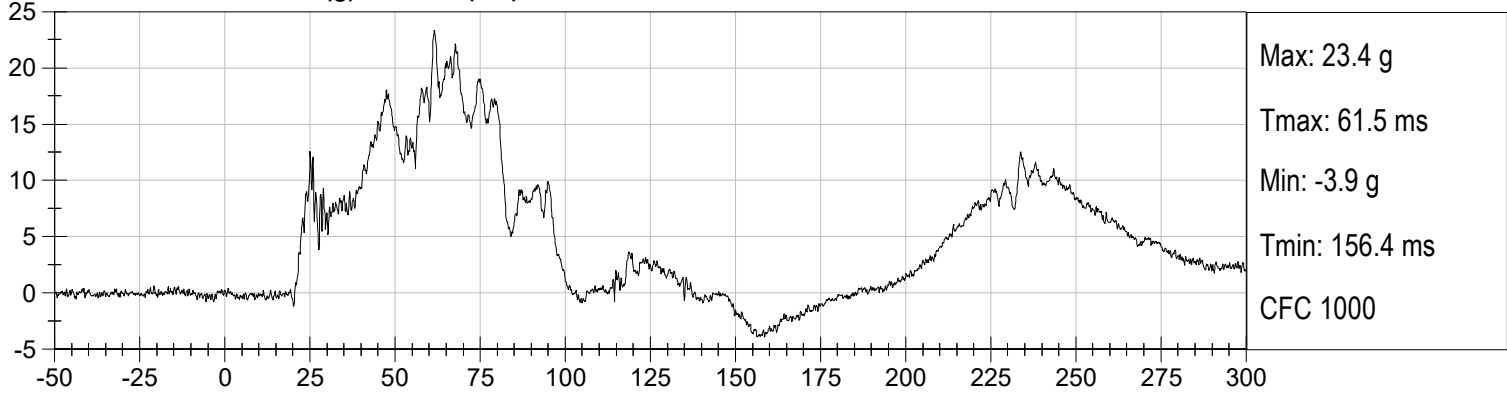


PASSENGER HEAD Resultant (g) vs Time (ms)

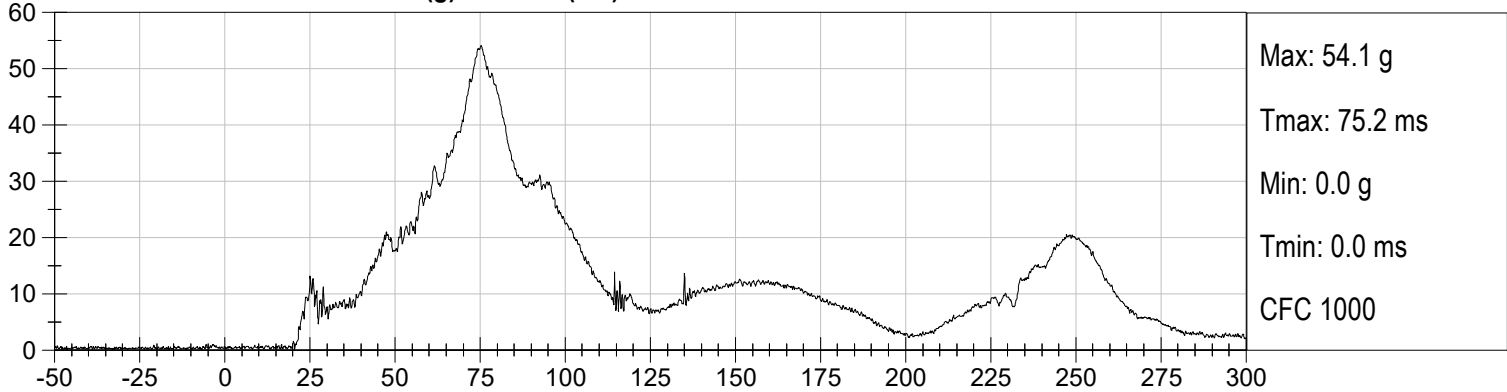

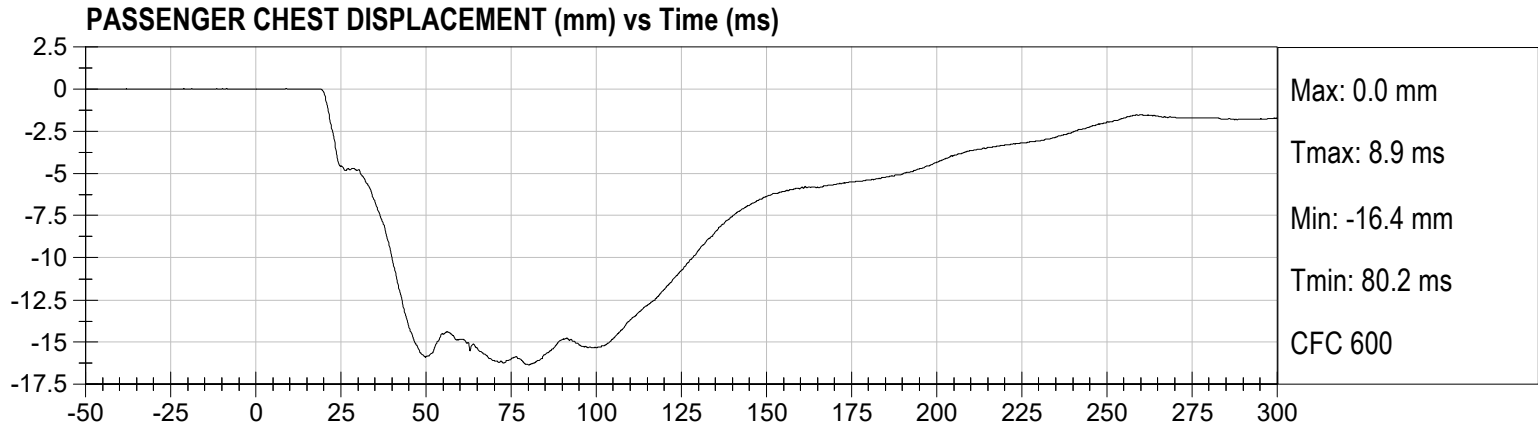

PASSENGER CHEST X (g) vs Time (ms)

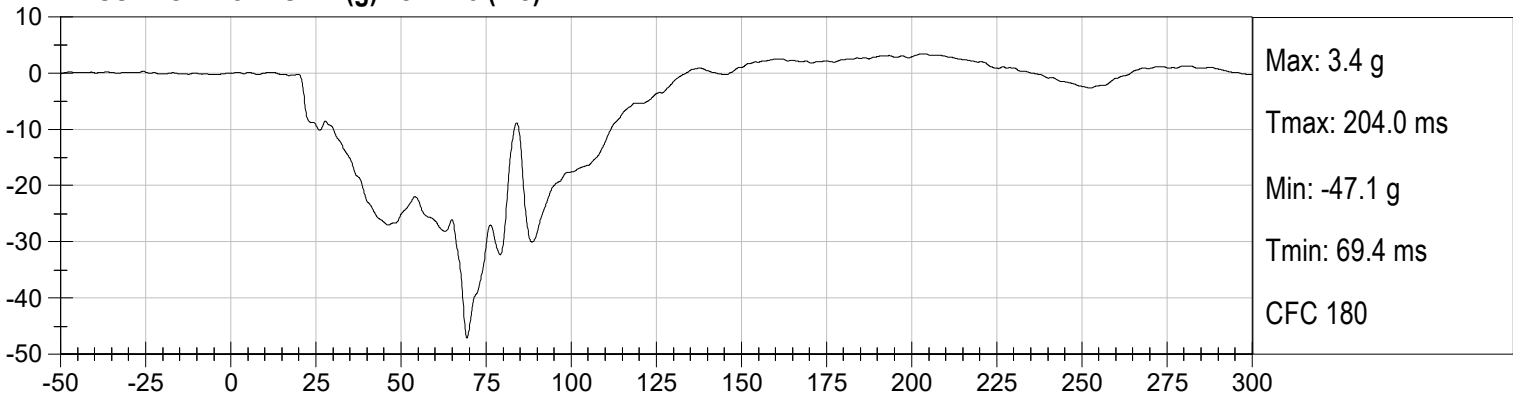


PASSENGER CHEST Y (g) vs Time (ms)




PASSENGER CHEST Z (g) vs Time (ms)




PASSENGER CHEST Resultant (g) vs Time (ms)

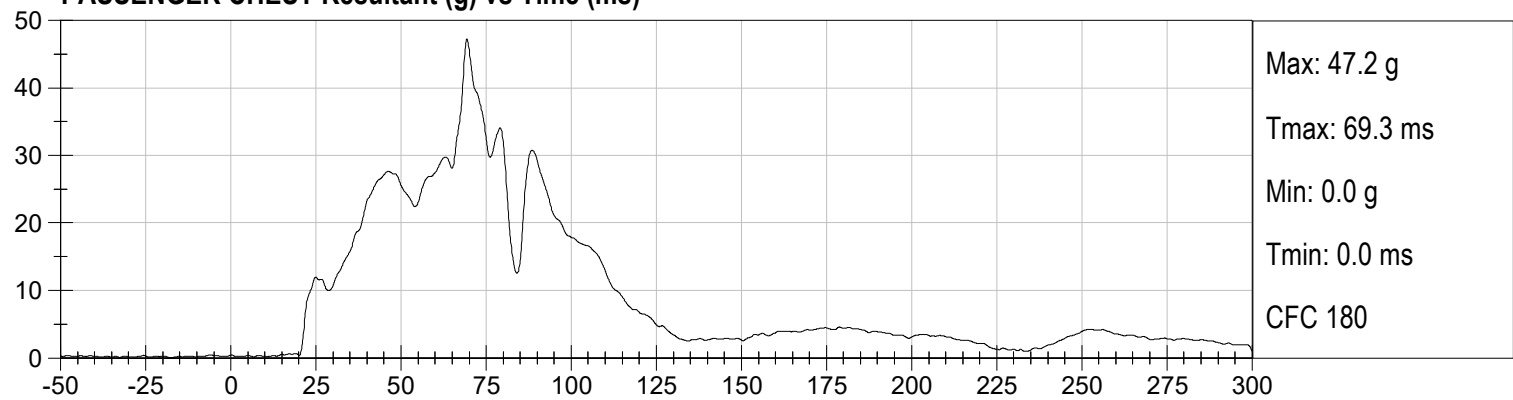


PASSENGER NECK FX (N) vs Time (ms)




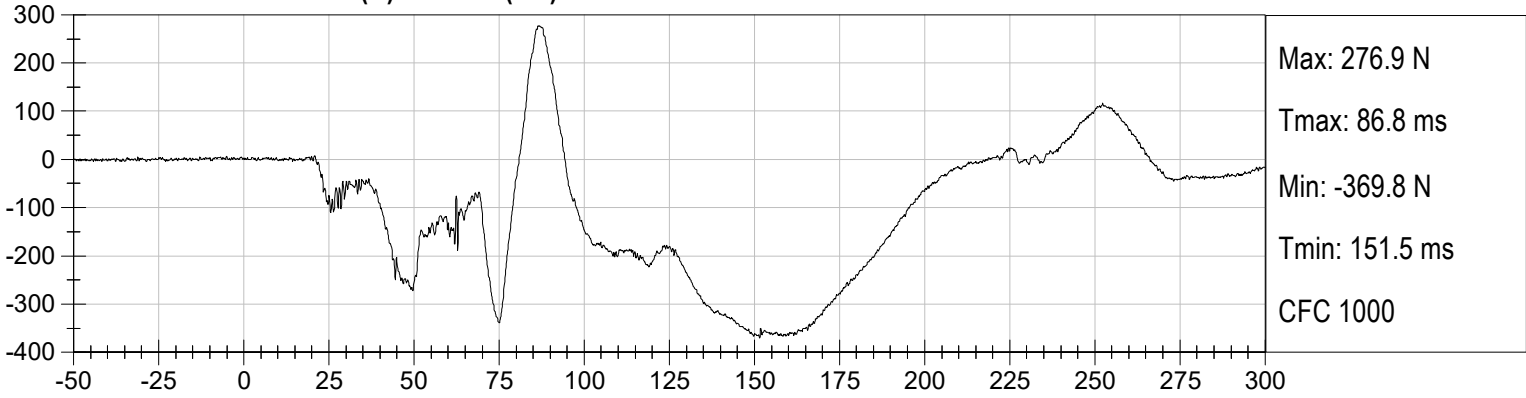


PASSENGER NECK FZ (N) vs Time (ms)

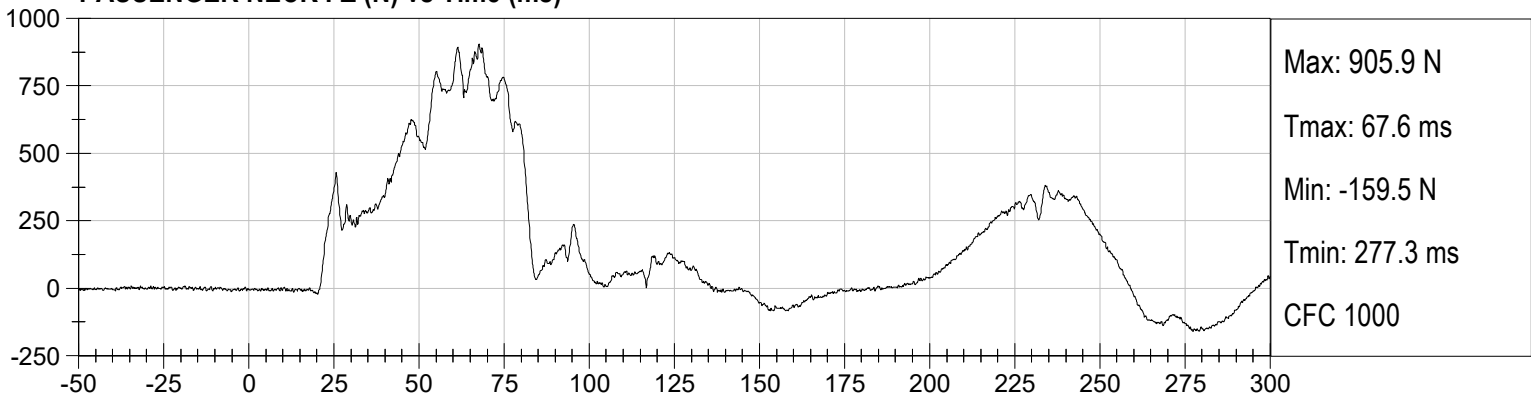


PASSENGER NECK MY (Nm) vs Time (ms)

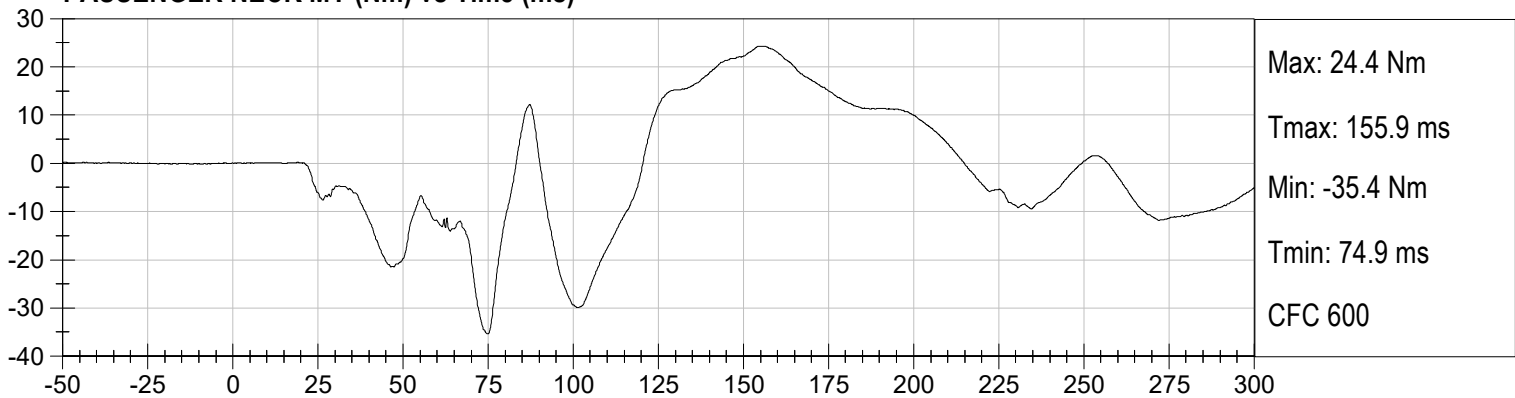


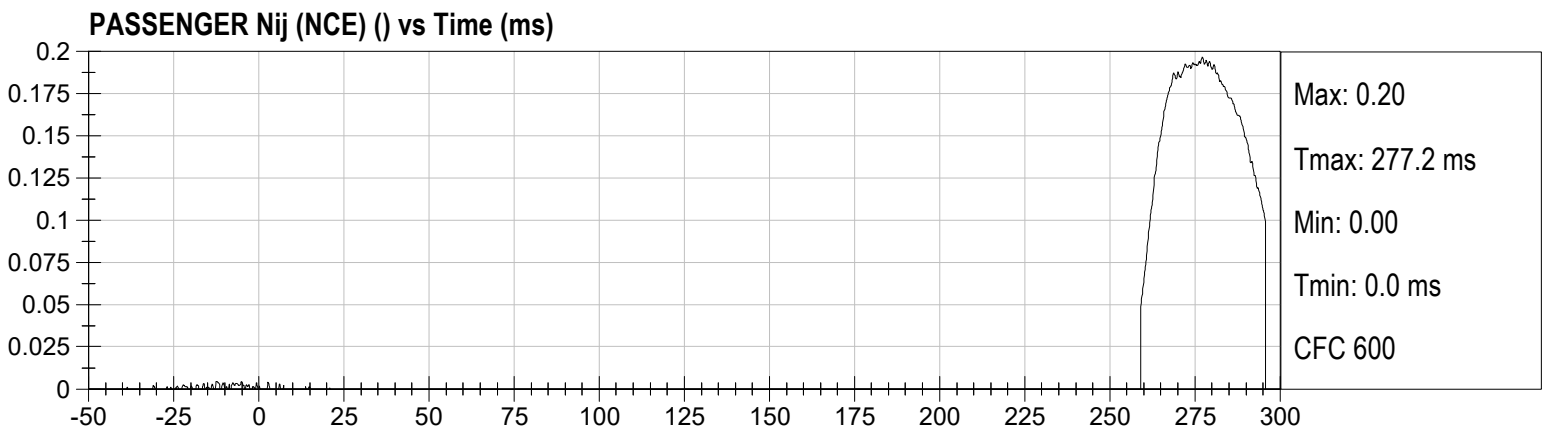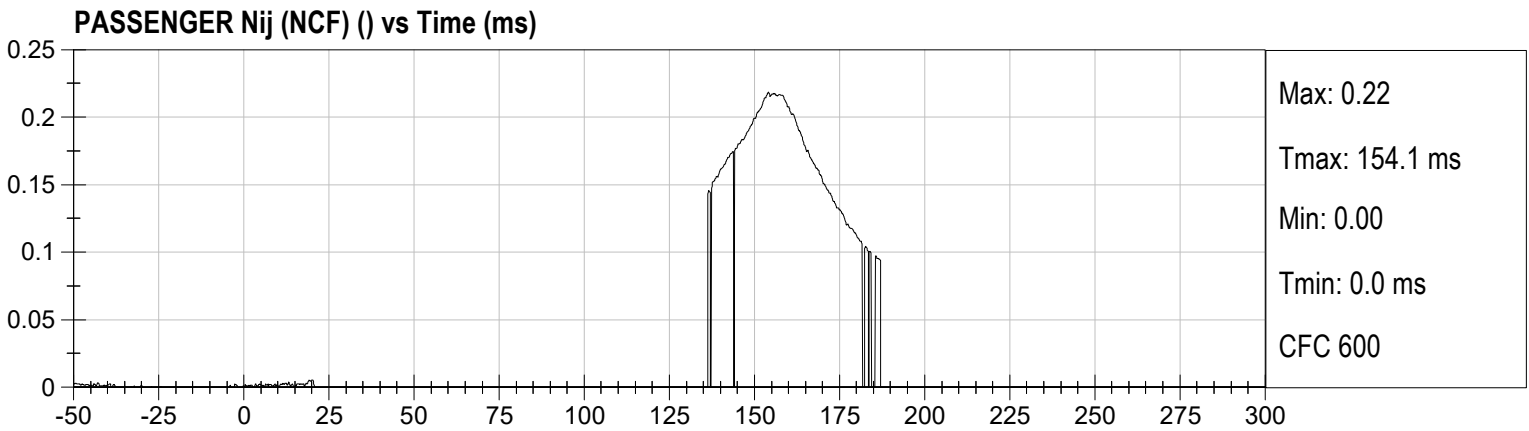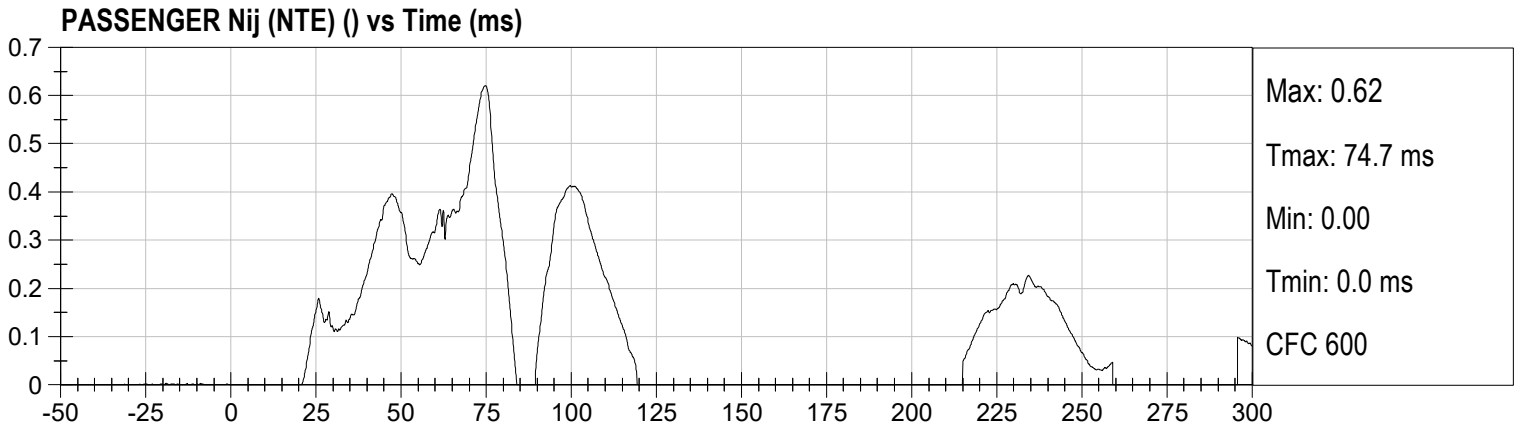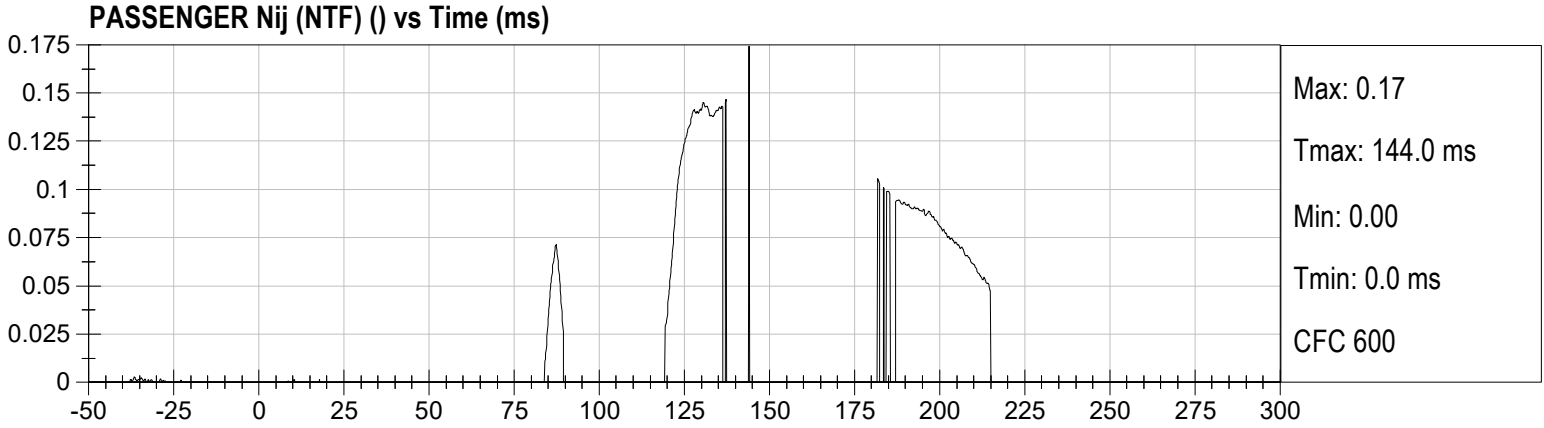

PASSENGER LEFT FEMUR (N) vs Time (ms)

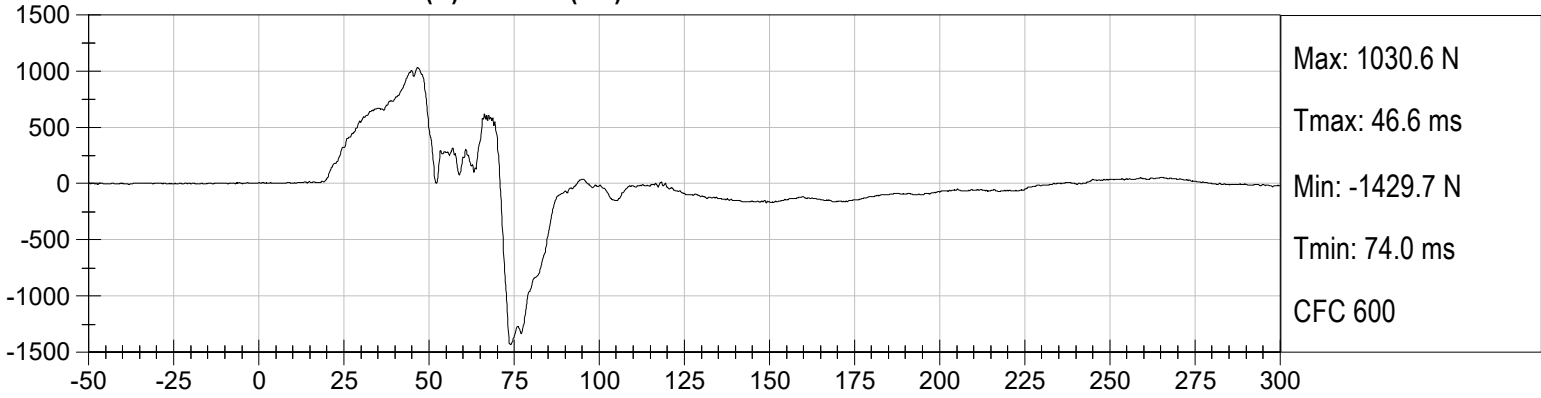

PASSENGER RIGHT FEMUR (N) vs Time (ms)

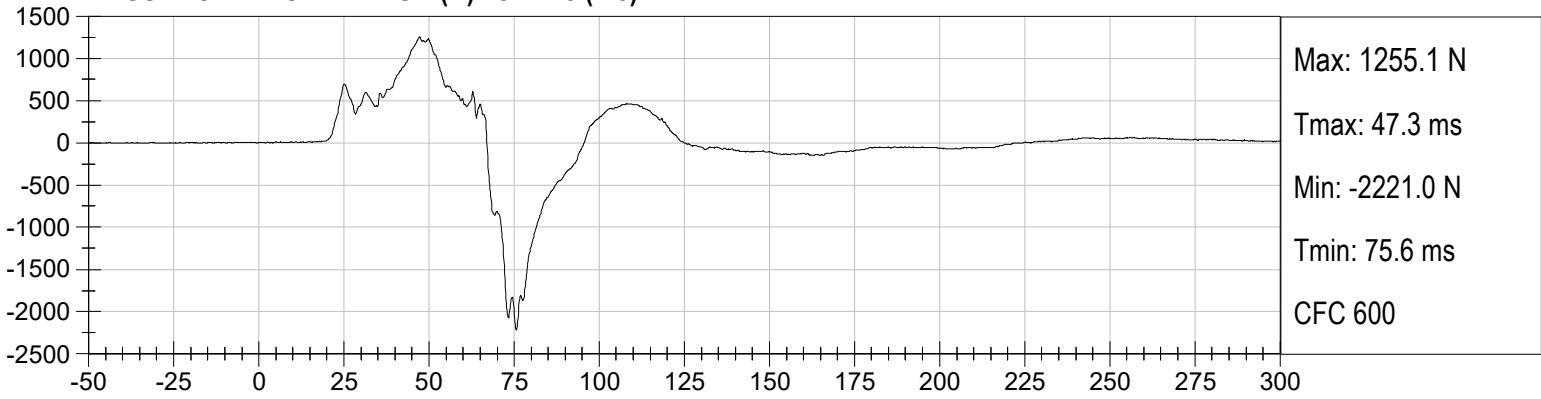

APPENDIX C
DUMMY CALIBRATION AND PERFORMANCE VERIFICATION DATA

CALIBRATION TEST RESULTS

PRE-TEST

HYBRID III 50TH PERCENTILE MALE - DRIVER ATD

**Hybrid III, 50th External Measurements
SN: 351**

HYBRID III, PART 572, SUBPART E EXTERNAL DIMENSIONS				
DIMENSION	DESCRIPTION	DETAILS	ASSEMBLY DIMENSION (inches)	ACTUAL MEASUREMENT
A	TOTAL SITTING HEIGHT	Seat surface to highest point on top of the head.	34.6-35.0	34.8
B	SHOULDER PIVOT HEIGHT	Centerline of shoulder pivot bolt to the seat surface.	19.9-20.5	20.0
C	H-POINT HEIGHT	Reference	3.3-3.5	3.4
D	H-POINT LOCATION FROM BACKLINE	Reference	5.3-5.5	5.5
E	SHOULDER PIVOT FROM BACKLINE	Center of the shoulder clevis to the rear vertical surface of the fixture.	3.3-3.7	3.5
F	THIGH CLEARANCE	Measured at the highest point on the upper femur segment.	5.5-6.1	6.0
G	BACK OF ELBOW TO WRIST PIVOT	back of the elbow flesh to the wrist pivot in line with the elbow and wrist pivots	11.4-12.0	11.8
H	HEAD BACK TO BACKLINE	Back of Skull cap skin to seat rear vertical surface (Reference)	1.6-1.8	1.7
I	SHOULDER TO- ELBOW LENGTH	Measure from the highest point on top of the shoulder clevis to the lowest part of the flesh on the elbow in line with the elbow pivot bolt.	13.0-13.6	13.3
J	ELBOW REST HEIGHT	Measure from the flesh below the elbow pivot bolt to the seat surface.	7.5-8.3	7.8
K	BUTTOCK TO KNEE LENGTH	The forward most part of the knee flesh to the rear vertical surface of the fixture.	22.8-23.8	23.8
L	POPLITEAL HEIGHT	Seat surface to the plane of the horizontal plane of the bottom of the feet.	16.9-17.9	17.0
M	KNEE PIVOT HEIGHT	Centerline of knee pivot bolt to the horizontal plane of the bottom of the feet.	19.1-19.7	19.5
N	BUTTOCK POPLITEAL LENGTH	The rearmost surface of the lower leg to the same point on the rear surface of the buttocks used for dim. "K".	17.8-18.8	18.8

HYBRID III, SUBPART E EXTERIOR DIMENSIONS, continued				
DIMENSION	DESCRIPTION	DETAILS		ACTUAL MEASUREMENT
O	CHEST DEPTH WITHOUT JACKET	Measured 16.9-17.1 in. above seat surface	8.4-9.0	8.5
P	FOOT LENGTH	Tip of toe to rear of heel	9.9-10.5	10.3
V	SHOULDER BREADTH	Outside edges of right and left shoulder clevises	16.3-17.2	16.5
W	FOOT BREADTH	The widest part of the foot	3.6-4.2	4.0
Y	CHEST CIRCUMFERENCE (WITH CHEST JACKET)	Measured 16.9-17.1 in. above seat surface	38.2-39.4	39.2
Z	WAIST CIRCUMFERENCE	Measured 8.9-9.1 in. above seat surface	32.9-34.1	33.7
AA	REFERENCE LOCATION FOR MEASUREMENT OF CHEST CIRCUMFERENCE	Reference	16.9-17.1	17.0
BB	REFERENCE LOCATION FOR MEASUREMENT OF WAIST CIRCUMFERENCE	Reference	8.9-9.1	9.0

NOTE: THE H-POINT IS LOCATED 1.83 INCHES FORWARD AND 2.57 INCHES DOWN FROM THE CENTER OF THE PELVIS ANGLE REFERENCE HOLE.

**MGA RESEARCH CORPORATION
HEAD DROP TEST
HYBRID III 50TH PERCENTILE MALE**

ATD Serial No: 351

Test ID: D190821



Tested Parameter	Units	Specification	Result	Pass/Fail
Laboratory Temperature	deg C	18.9 to 25.6	21.5	Pass
Laboratory Relative Humidity	%	10 to 70	21	Pass
Peak Resultant Acceleration	G's	225 to 275	258	Pass
Peak Lateral Acceleration	G's	<= +/- 15.0	-5.4	Pass
Unimodal	N/A	Yes	Yes	Pass
Oscillations	N/A	within 10% of peak	Yes	Pass
Overall Test Results				Pass



Danielle Redinlaugh
Laboratory Technician

03/01/2019

Test Date

Robert Schaub
Approved By

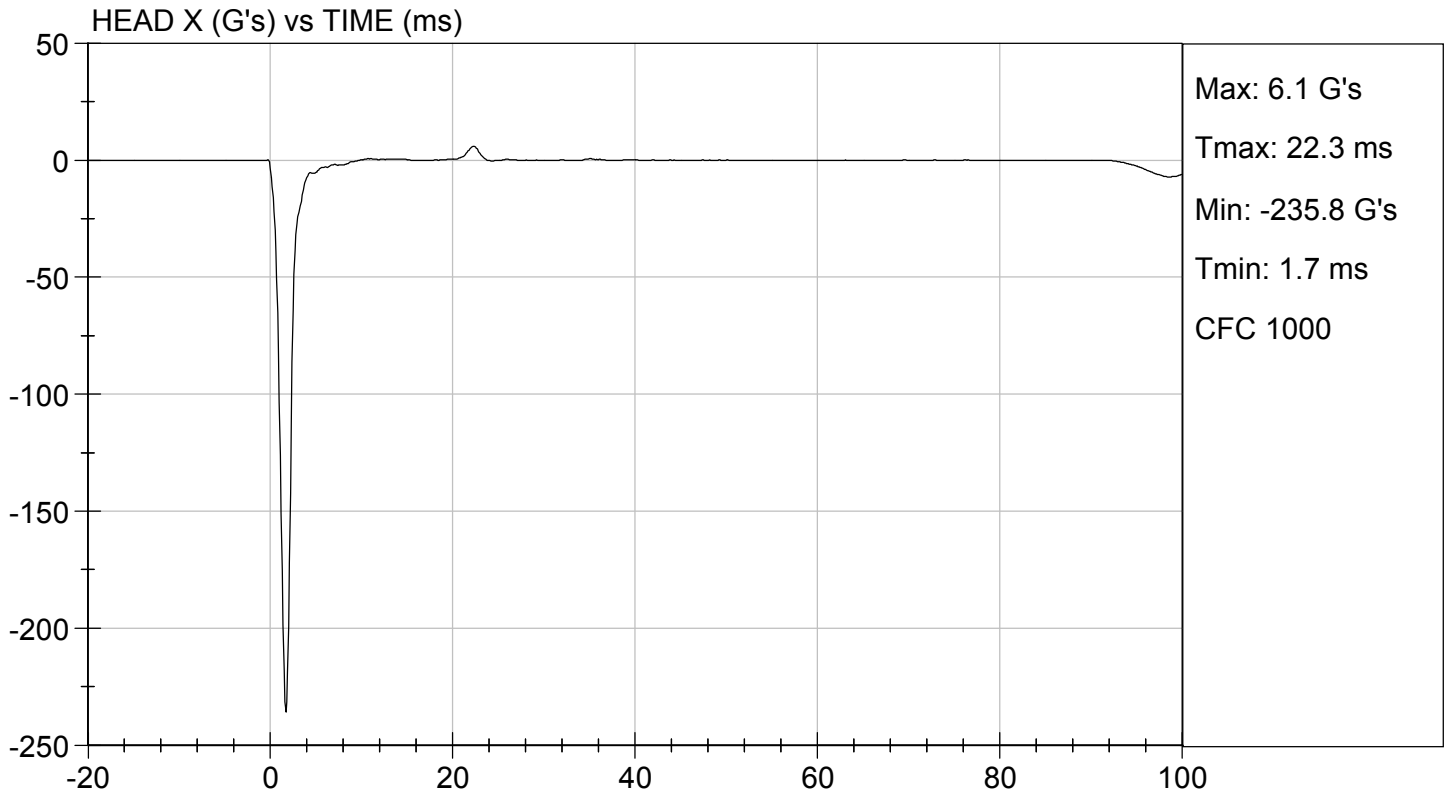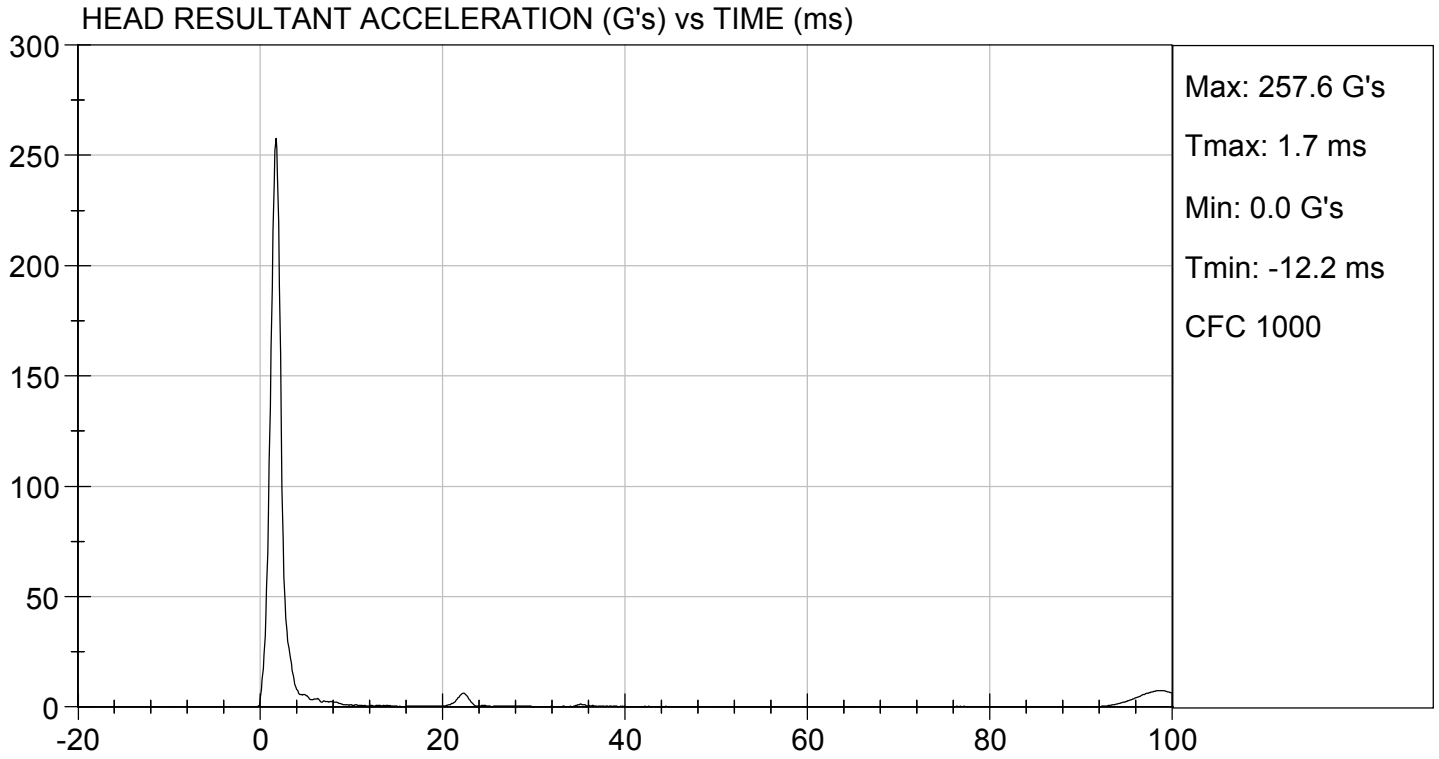

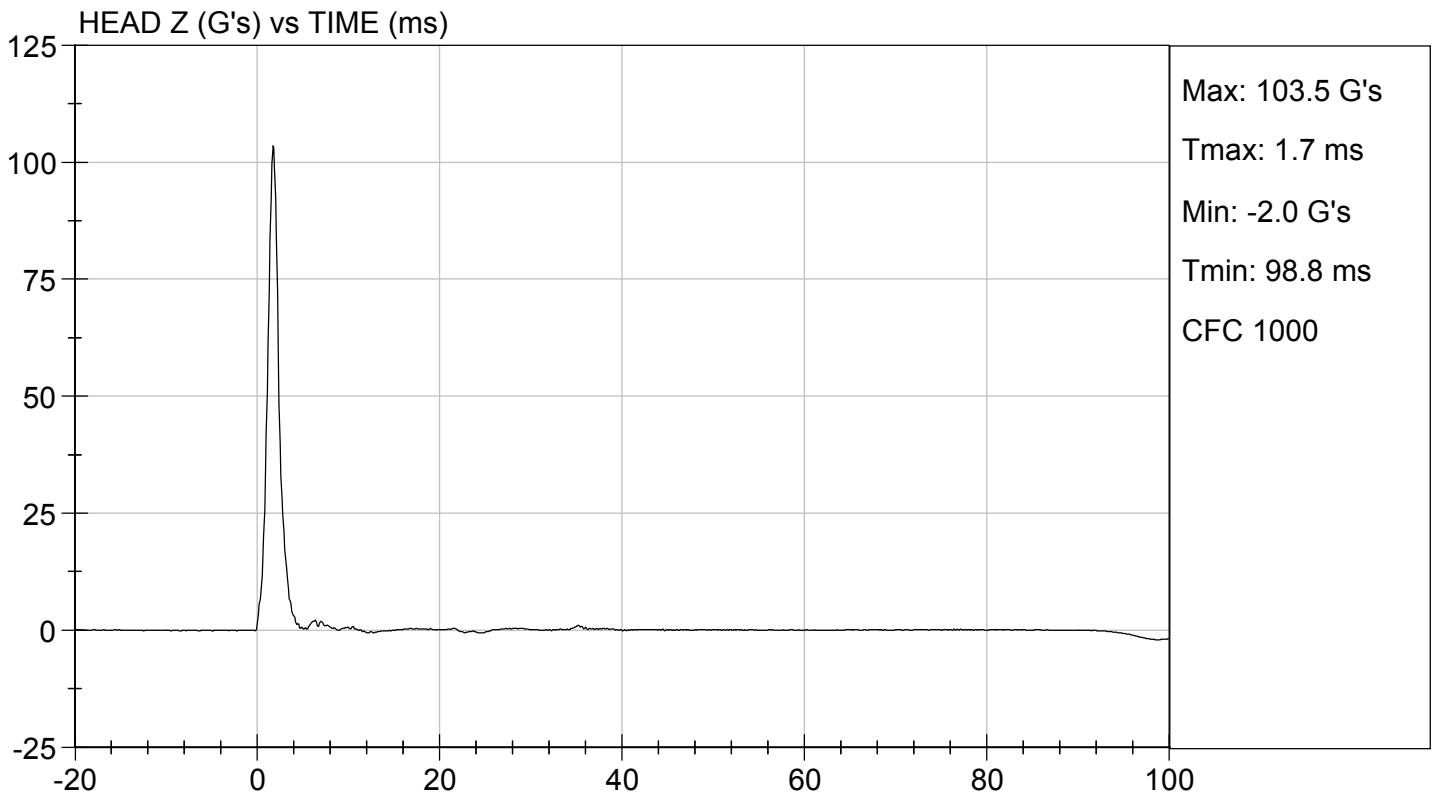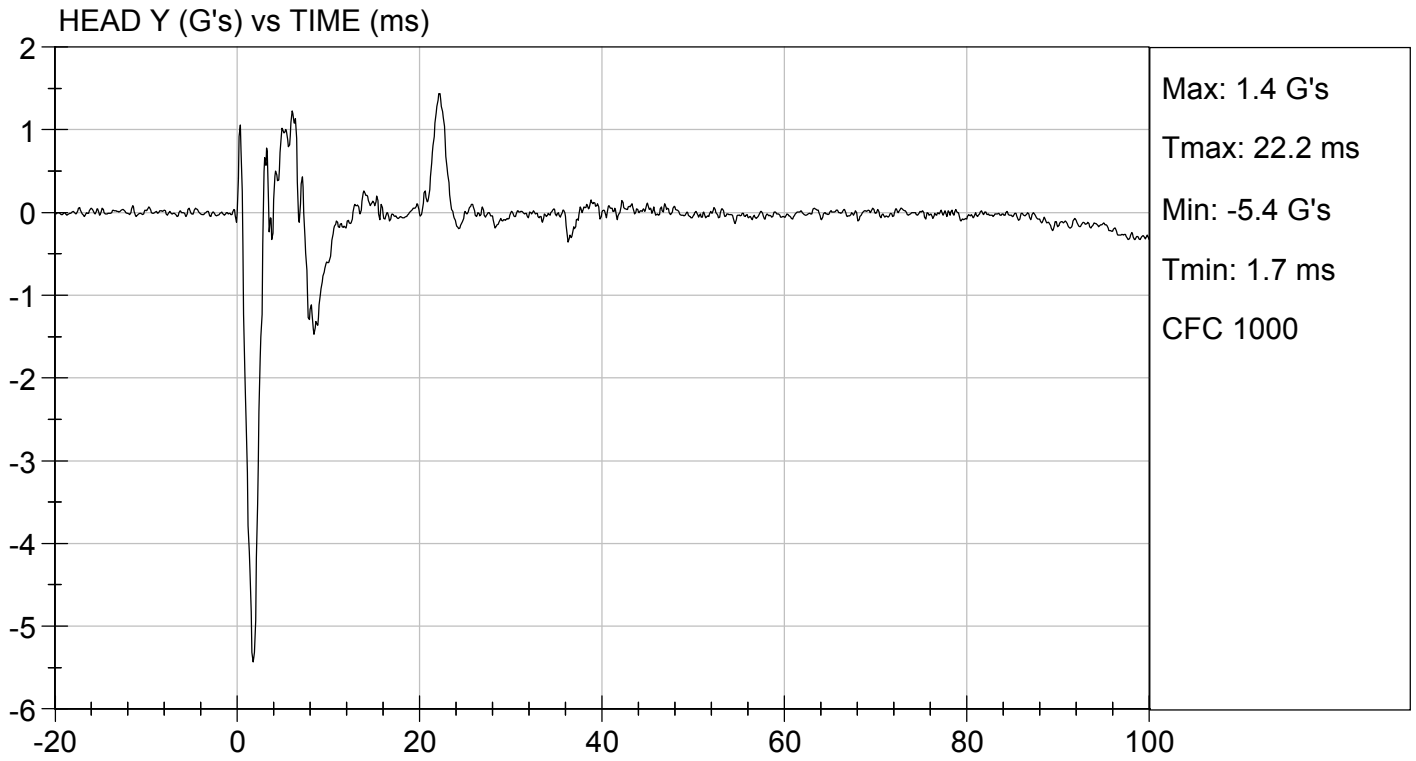

MGA RESEARCH CORPORATION
NECK FLEXION TEST
HYBRID III 50TH PERCENTILE MALE

ATD Serial No: 351



Test I.D.: D190822

Tested Parameter		Units	Specification	Result	Pass/Fail
Laboratory Temperature		deg C	20.6 to 22.2	21	Pass
Laboratory Relative Humidity		%	10 to 70	11	Pass
Pendulum Velocity		m/s	6.89 to 7.13	7.06	Pass
Pendulum Deceleration	10 ms	G's	22.50 to 27.50	24.30	Pass
	20 ms	G's	17.60 to 22.60	21.16	Pass
	30 ms	G's	12.50 to 18.50	15.23	Pass
Peak Pendulum Deceleration After 30 ms		G's	<= 29.0	15.2	Pass
Deceleration Decay Time to Cross 5 G's		ms	34.0 to 42.0	35.2	Pass
Maximum "D" Plane Rotation	Maximum	Deg	64.0 to 78.0	77.7	Pass
	Time	ms	57.0 to 64.0	59.2	Pass
"D" Plane Rotation Decay Time To Zero Crossing		ms	113.0 to 128.0	120.8	Pass
Moment About Occipital Condyle	Maximum	Nm	88.1 to 108.5	88.8	Pass
	Time	ms	47.0 to 58.0	49.9	Pass
Positive Moment Decay Time To Zero Crossing		ms	97.0 to 107.0	98.7	Pass
Overall Test Results					Pass

Danielle Redinlaugh
 Laboratory Technician

03/04/2019
 Test Date


Robert Schaub
 Approved By

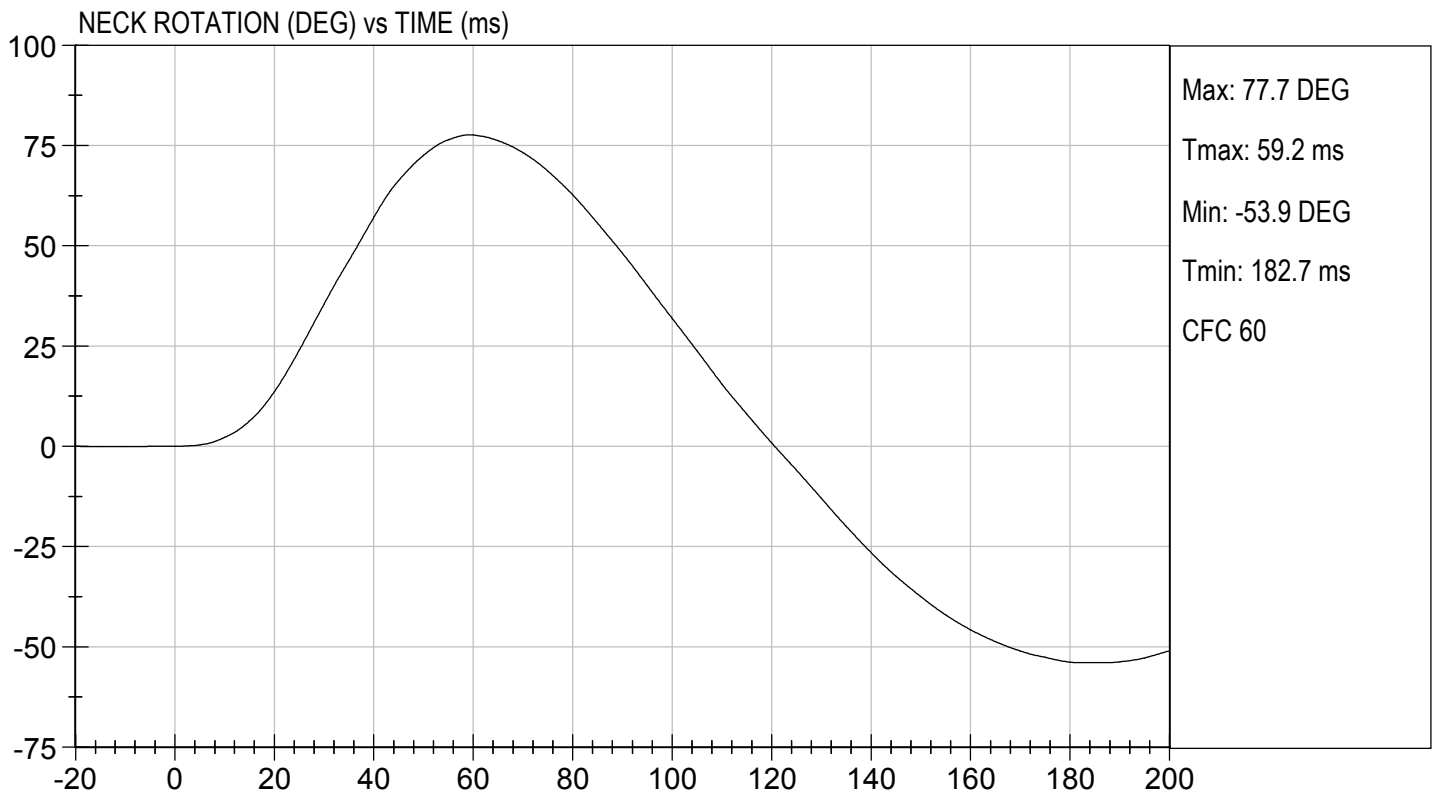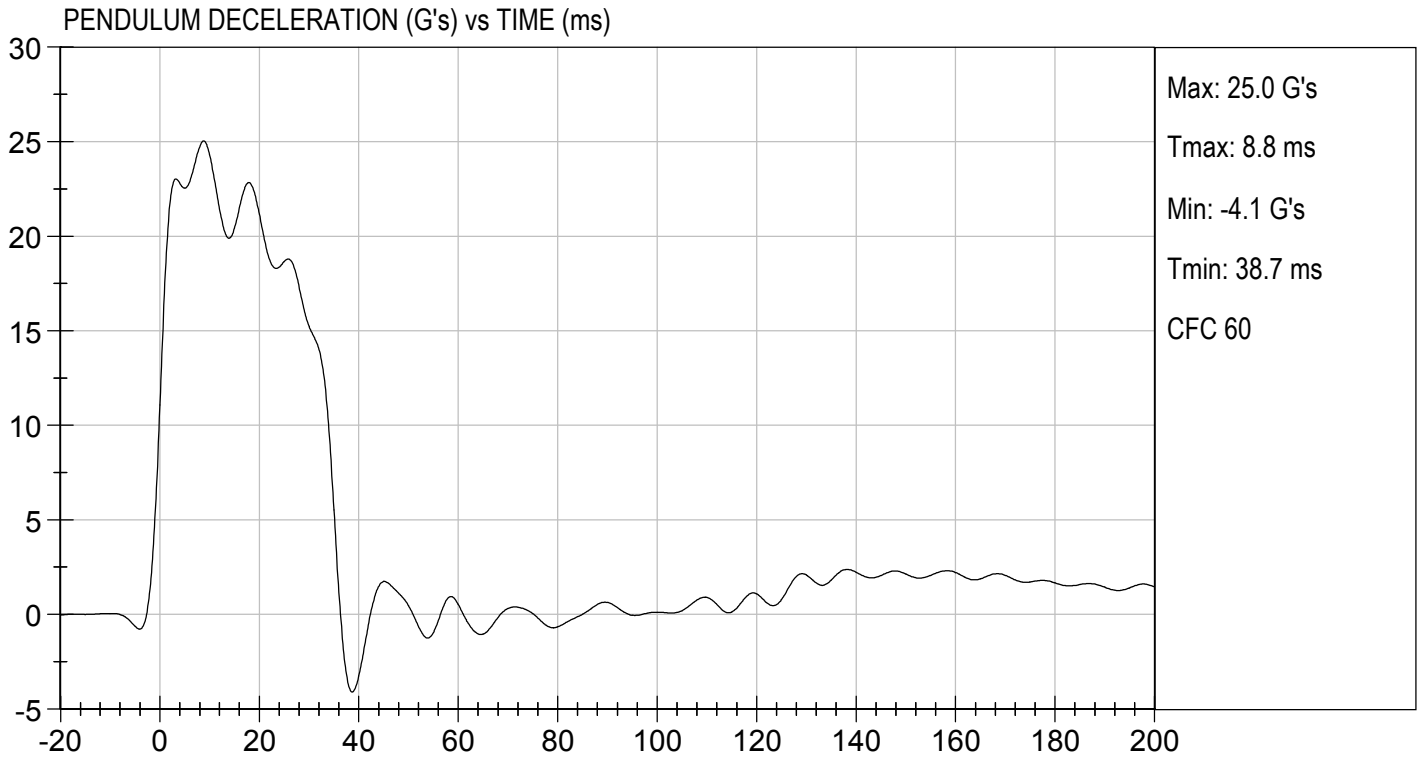



TEST DESC: NECK FLEXION
VELOCITY: 23.15 ft/s, 7.06 m/s

TEST DATE: 03/04/2019
TEST #: D190822

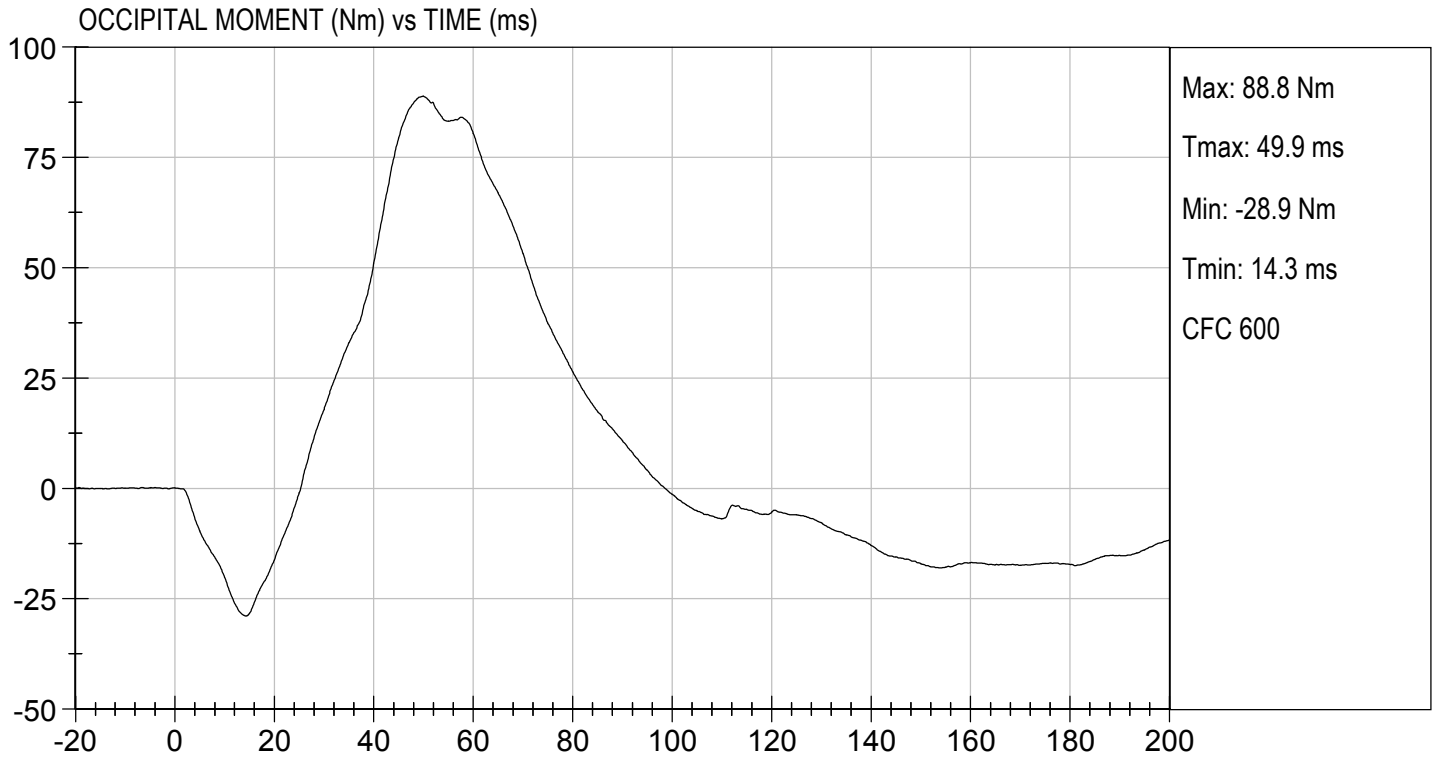

**MGA RESEARCH CORPORATION
NECK EXTENSION TEST
HYBRID III 50TH PERCENTILE MALE**

ATD Serial No: 351



Test I.D.: D190823


Tested Parameter		Units	Specification	Result	Pass/Fail
Laboratory Temperature		deg C	20.6 to 22.2	21	Pass
Laboratory Relative Humidity		%	10 to 70	11	Pass
Pendulum Velocity		m/s	5.95 to 6.19	6.19	Pass
Pendulum Deceleration	10 ms	G's	17.20 to 21.20	18.34	Pass
	20 ms	G's	14.00 to 19.00	17.35	Pass
	30 ms	G's	11.00 to 16.00	13.16	Pass
Peak Pendulum Deceleration After 30 ms		G's	<= 22.0	13.2	Pass
Deceleration Decay Time to Cross 5 G's		ms	38.0 to 46.0	38.8	Pass
Maximum "D" Plane Rotation	Maximum	Degrees	81.0 to 106.0	104.5	Pass
	Time	ms	72.0 to 82.0	77.6	Pass
"D" Plane Rotation Decay Time To Zero Crossing		ms	147.0 to 174.0	165.1	Pass
Moment About Occipital Condyle	Maximum	Nm	-52.9 to -79.9	-63.6	Pass
	Time	ms	65.0 to 79.0	73.2	Pass
Negative Moment Decay Time To Zero Crossing		ms	120.0 to 148.0	147.9	Pass
Overall Test Results					Pass

Danielle Redinlaugh
Laboratory Technician

03/04/2019
Test Date

Robert Schaub
Approved By

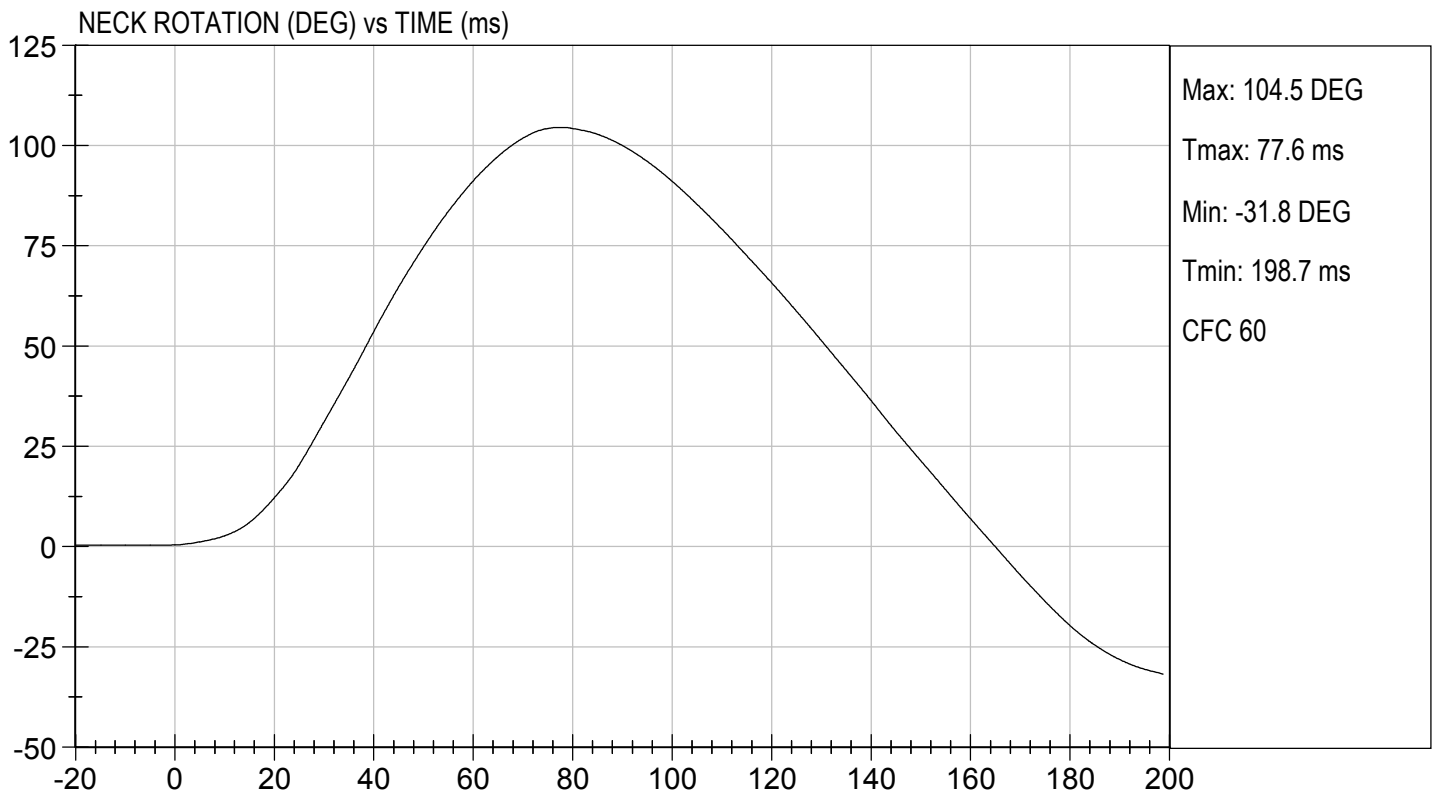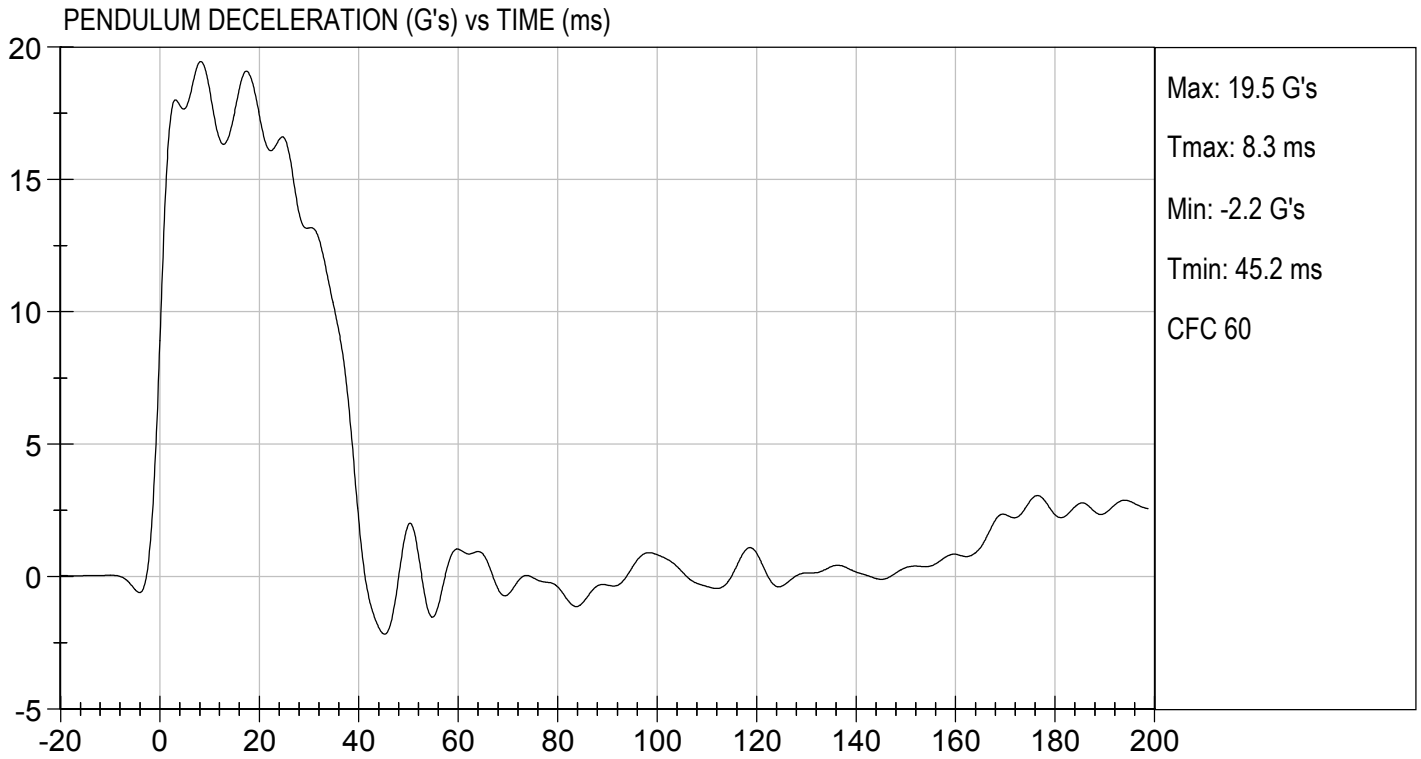

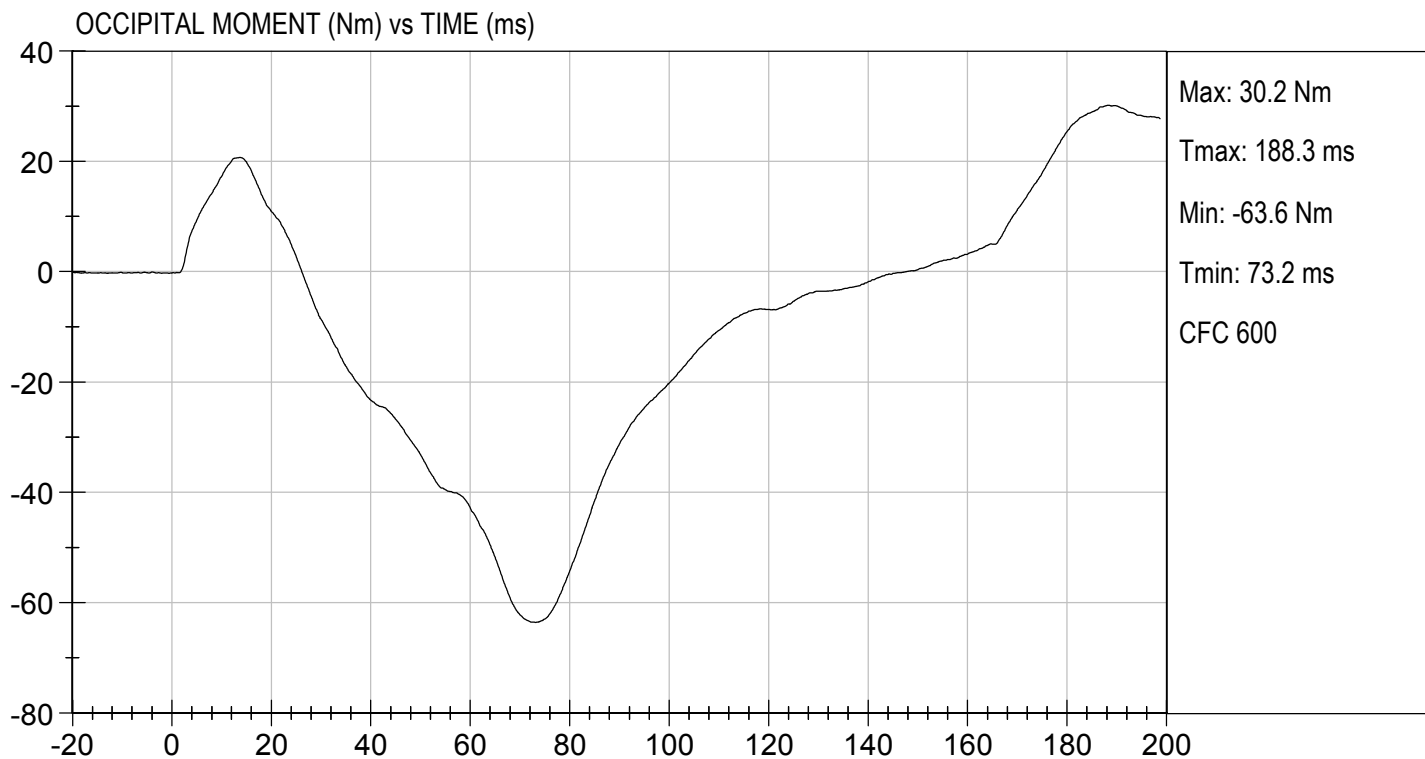

MGA RESEARCH CORPORATION
THORAX IMPACT
HYBRID III 50TH PERCENTILE MALE


ATD Serial No: 351


Test I.D: D190824

Tested Parameter	Units	Specification	Result	Pass/Fail
Laboratory Temperature	deg C	20.6 to 22.2	21.2	Pass
Laboratory Relative Humidity	%	10 to 70	16	Pass
Probe Velocity	m/s	6.58 to 6.82	6.77	Pass
Peak Probe Force	N	5159 to 5893	5,473	Pass
Peak Sternum Displacement	cm	6.35 to 7.26	6.99	Pass
Internal Hysteresis	%	69 to 85	70	Pass
Overall Test Results				Pass


 Laboratory Technician

03/01/2019
 Test Date


 Approved By

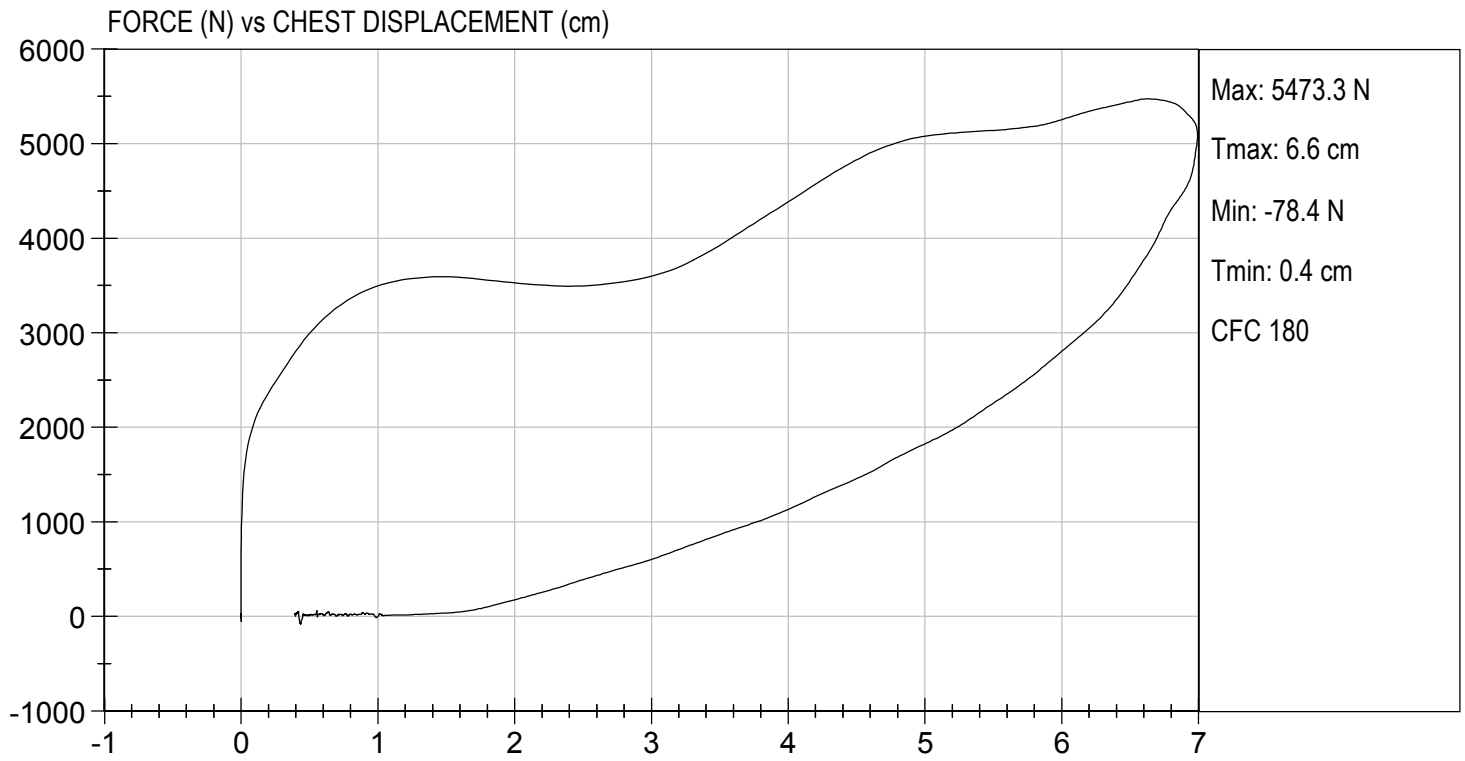

MGA RESEARCH CORPORATION
RIGHT KNEE IMPACT TEST
HYBRID III 50TH PERCENTILE MALE

ATD Serial No: 351

Test I.D: D190825

Tested Parameter	Units	Specification	Result	Pass/Fail
Laboratory Temperature	deg C	18.9 to 25.6	21.5	Pass
Laboratory Relative Humidity	%	10 to 70	23	Pass
Probe Velocity	m/s	2.07 to 2.13	2.11	Pass
Peak Probe Force	N	4715 to 5782	5,450	Pass
Overall Test Results				Pass

Danielle Redinlaugh
 Laboratory Technician


03/01/2019
 Test Date

Robert Schaub
 Approved By



TEST DESC: RIGHT KNEE
VELOCITY: 6.92 ft/s, 2.11 m/s

TEST DATE: 03/01/2019
TEST #: D190825

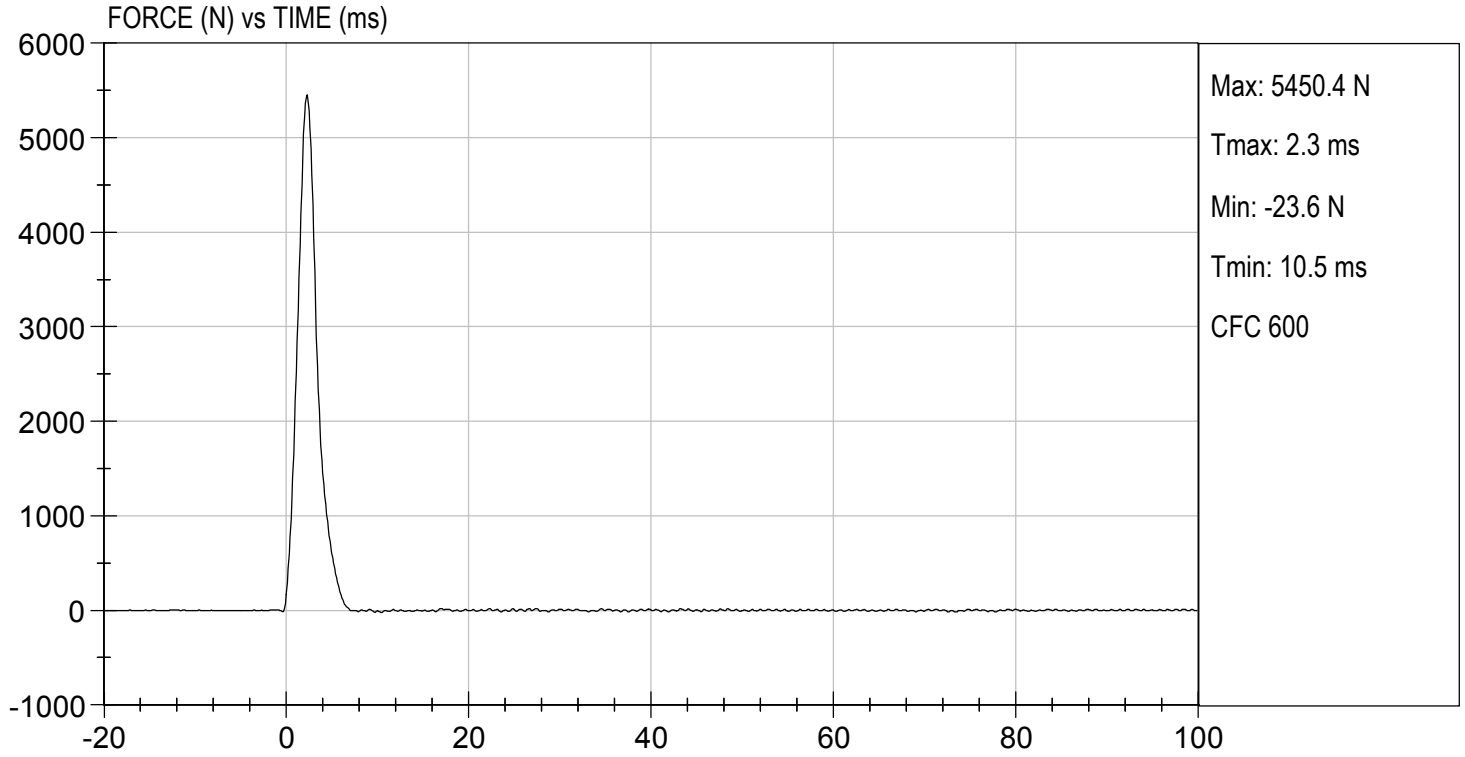

MGA RESEARCH CORPORATION
LEFT KNEE IMPACT TEST
HYBRID III 50TH PERCENTILE MALE

ATD Serial No: 351

Test I.D: D190826

Tested Parameter	Units	Specification	Result	Pass/Fail
Laboratory Temperature	deg C	18.9 to 25.6	21.5	Pass
Laboratory Relative Humidity	%	10 to 70	23	Pass
Probe Velocity	m/s	2.07 to 2.13	2.11	Pass
Peak Probe Force	N	4715 to 5782	4,761	Pass
Overall Test Results				Pass

Danielle Redinlaugh
 Laboratory Technician


03/01/2019
 Test Date

Robert Schaub
 Approved By



TEST DESC: LEFT KNEE
VELOCITY: 6.92 ft/s, 2.11 m/s

TEST DATE: 03/01/2019
TEST #: D190826

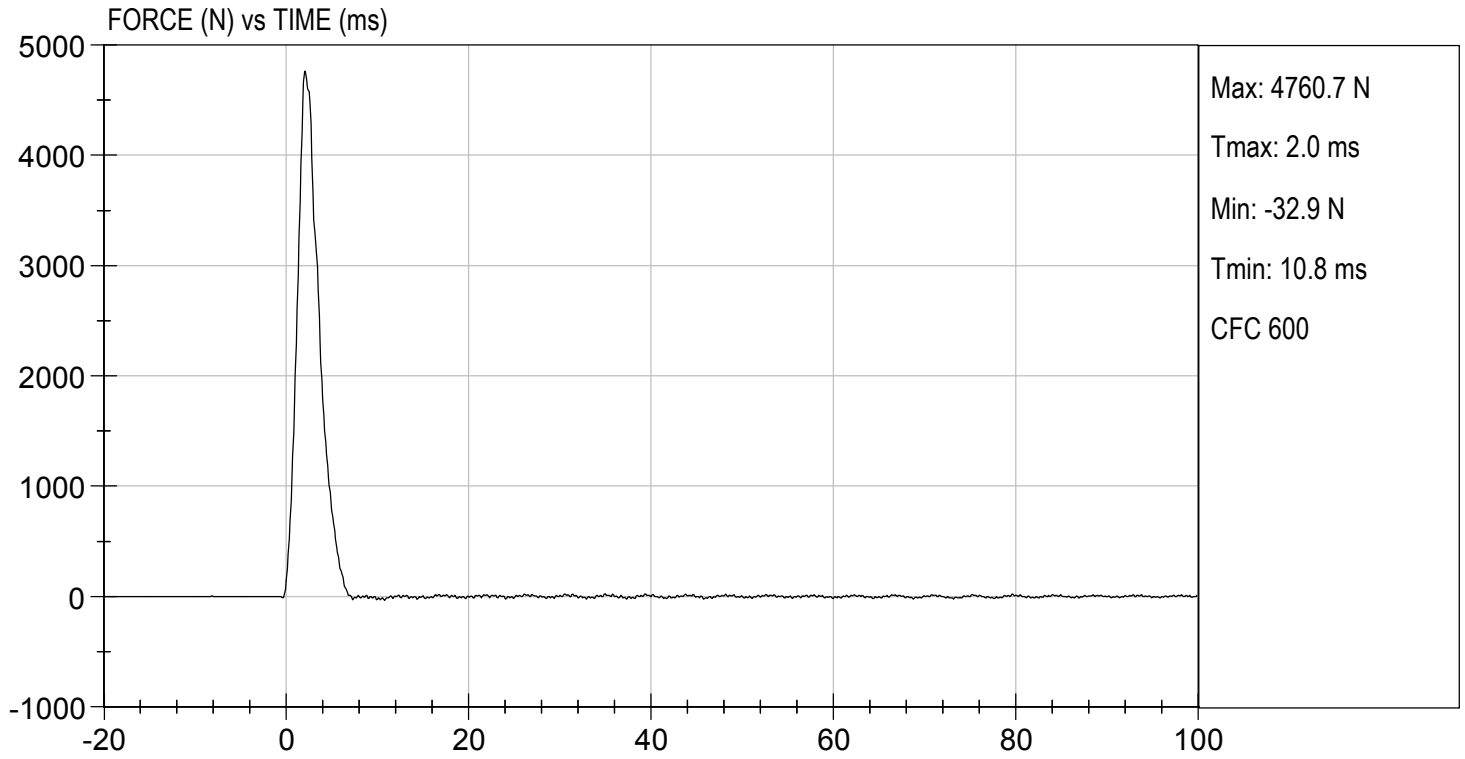

MGA RESEARCH CORPORATION
HIP-FEMUR FLEXION TEST
HYBRID III 50TH PERCENTILE MALE

ATD Serial No: 351


Test I.D: D190820


Tested Parameter	Units	Specification	Result		Pass/Fail
			Right	Left	
Laboratory Temperature	deg C	18.9 to 25.6	21.0	21.0	Pass
Laboratory Relative Humidity	%	10 to 70	10	10	Pass
Rotation Rate	deg/s	5.0 to 10.0	6.5	6.3	Pass
30 Degrees	Nm	94.9 Nm Max	91.0	89.7	Pass
150 ft-lbf / 203.4 Nm	Deg	40.0 to 50.0 Degree Max Rotation	47.3	44.0	Pass
Overall Test Results					Pass

Danielle Redinlaugh
 Laboratory Technician

03/04/2019
 Test Date

Robert Schaub
 Approved By

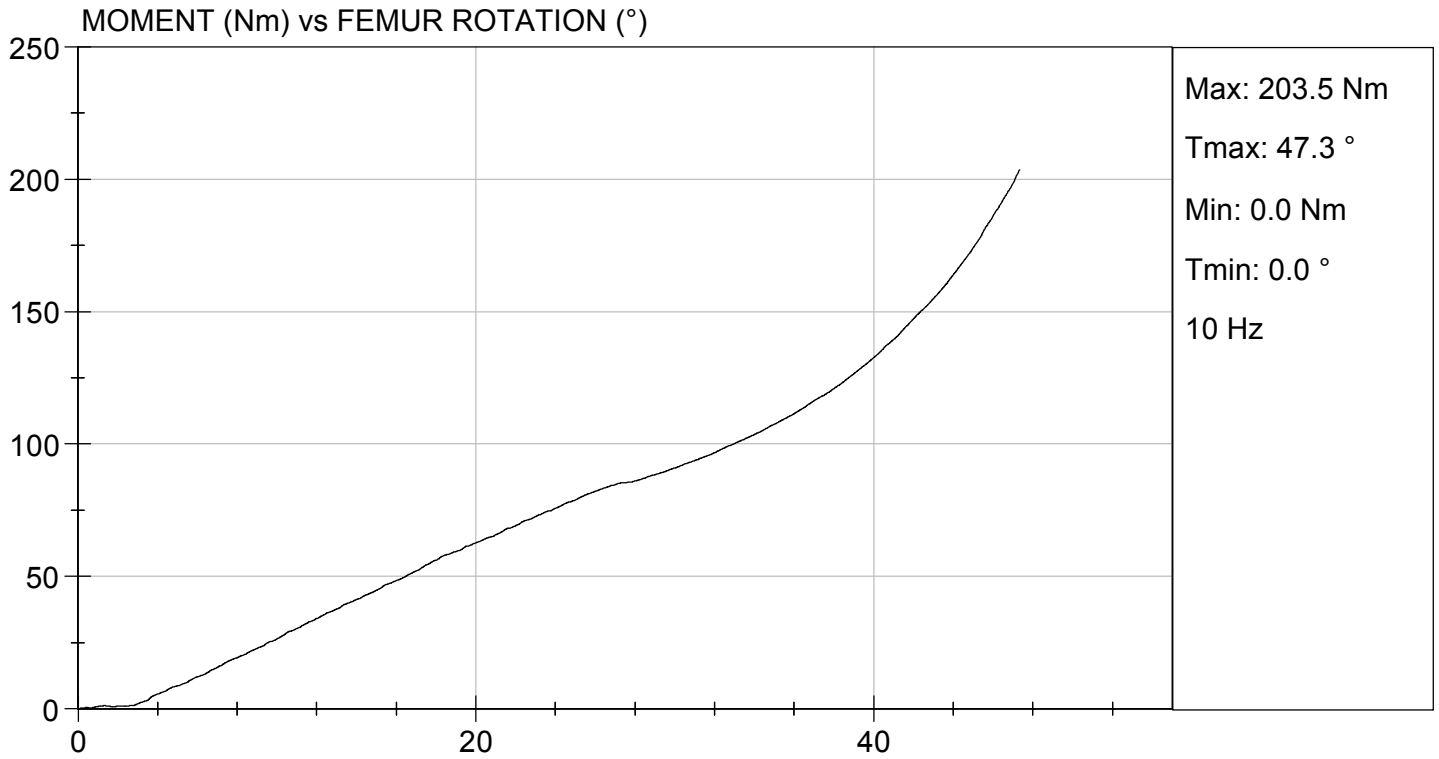

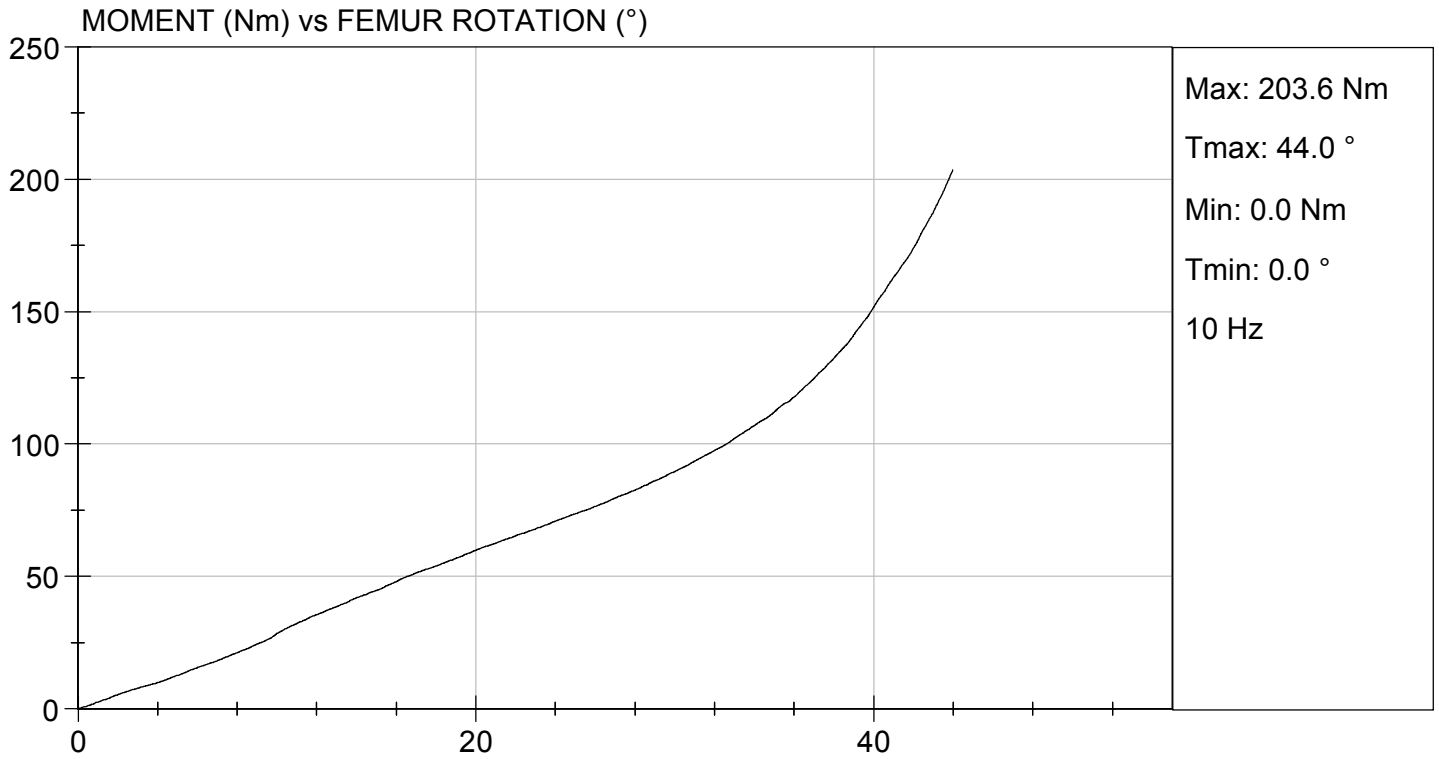

CALIBRATION TEST RESULTS

POST-TEST

HYBRID III 50TH PERCENTILE MALE - DRIVER ATD

MGA RESEARCH CORPORATION
HEAD DROP TEST
HYBRID III 50TH PERCENTILE MALE


ATD Serial No: 351



Test ID: D190931



Tested Parameter	Units	Specification	Result	Pass/Fail
Laboratory Temperature	deg C	18.9 to 25.6	21.4	Pass
Laboratory Relative Humidity	%	10 to 70	23	Pass
Peak Resultant Acceleration	G's	225 to 275	247	Pass
Peak Lateral Acceleration	G's	<= +/- 15.0	1.8	Pass
Unimodal	N/A	Yes	Yes	Pass
Oscillations	N/A	within 10% of peak	Yes	Pass
Overall Test Results				Pass


 Laboratory Technician

03/08/2019
 Test Date


 Approved By

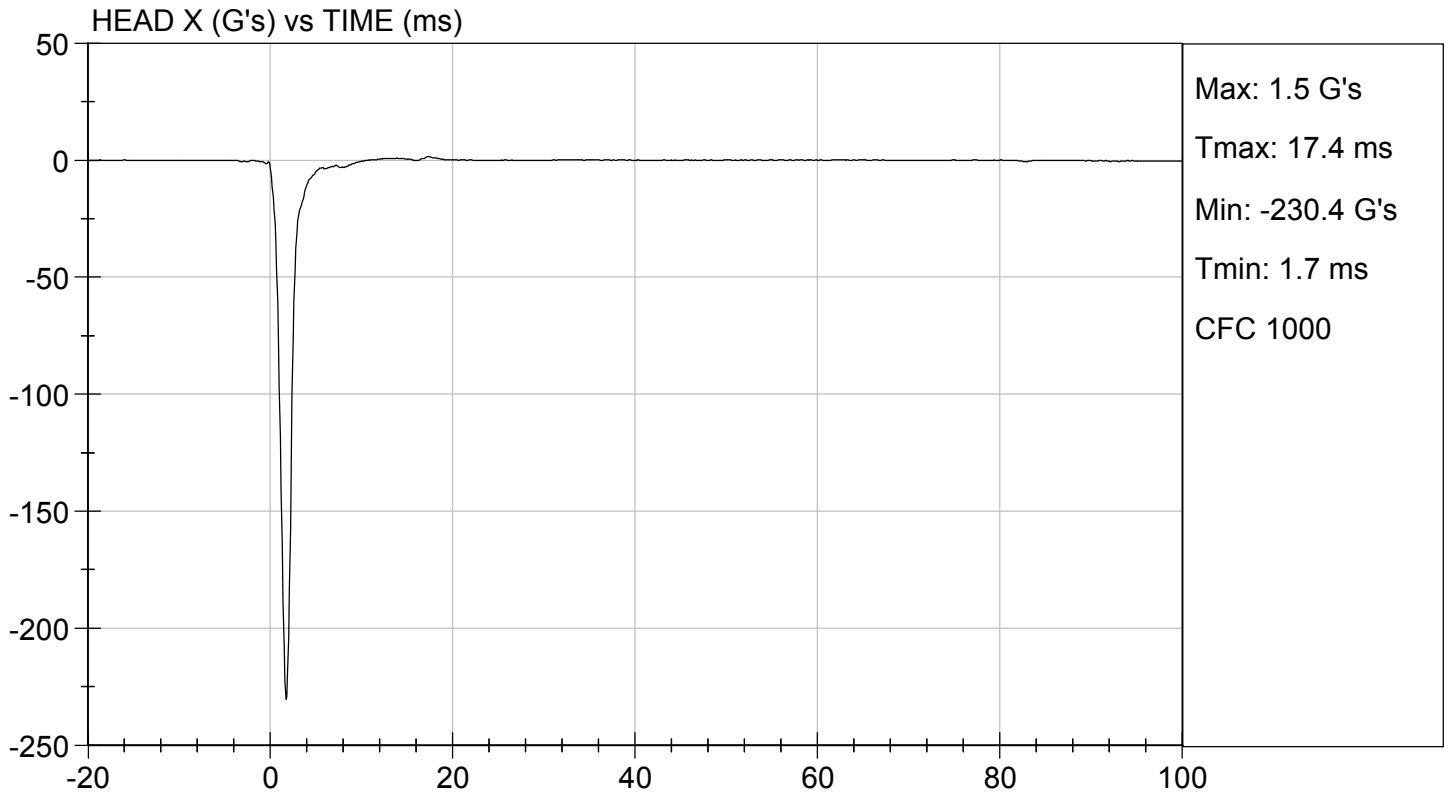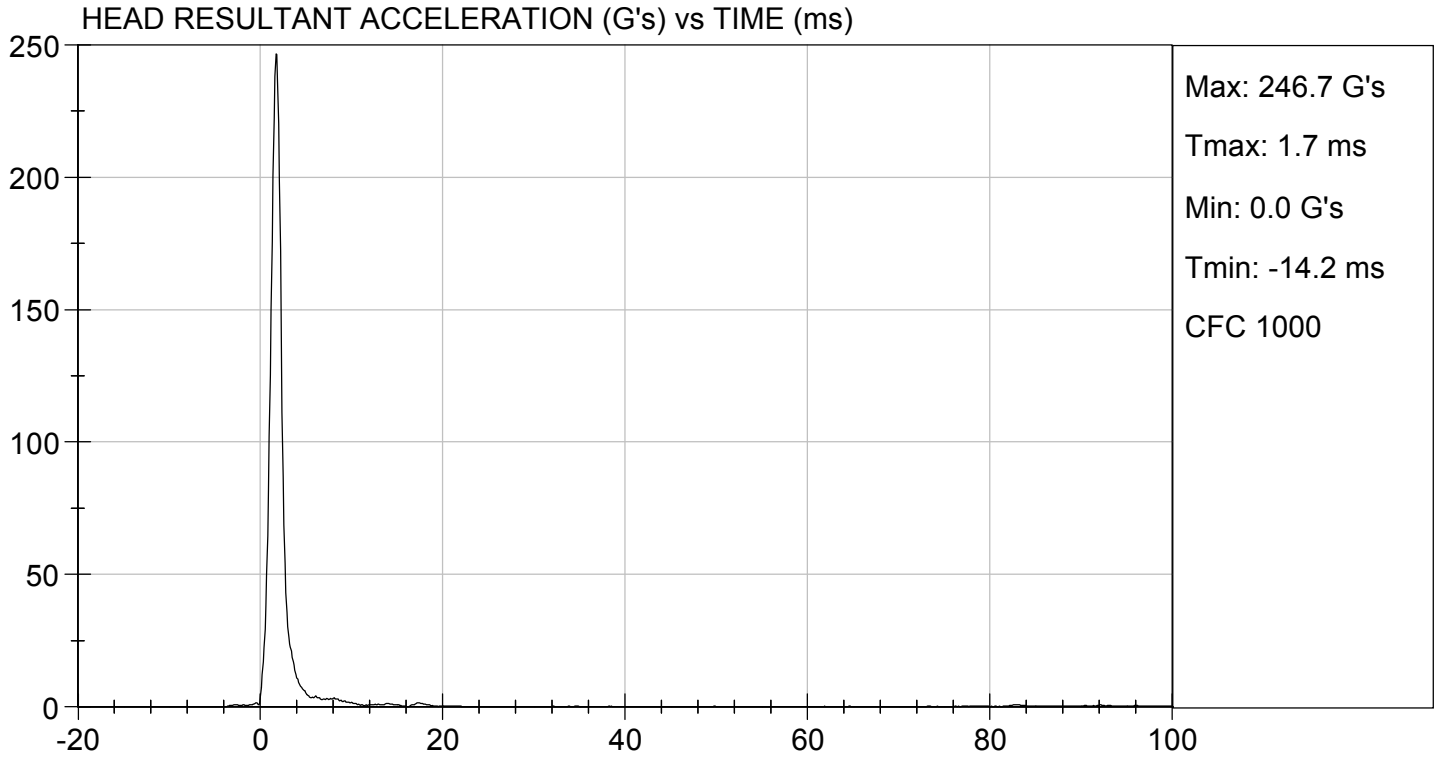

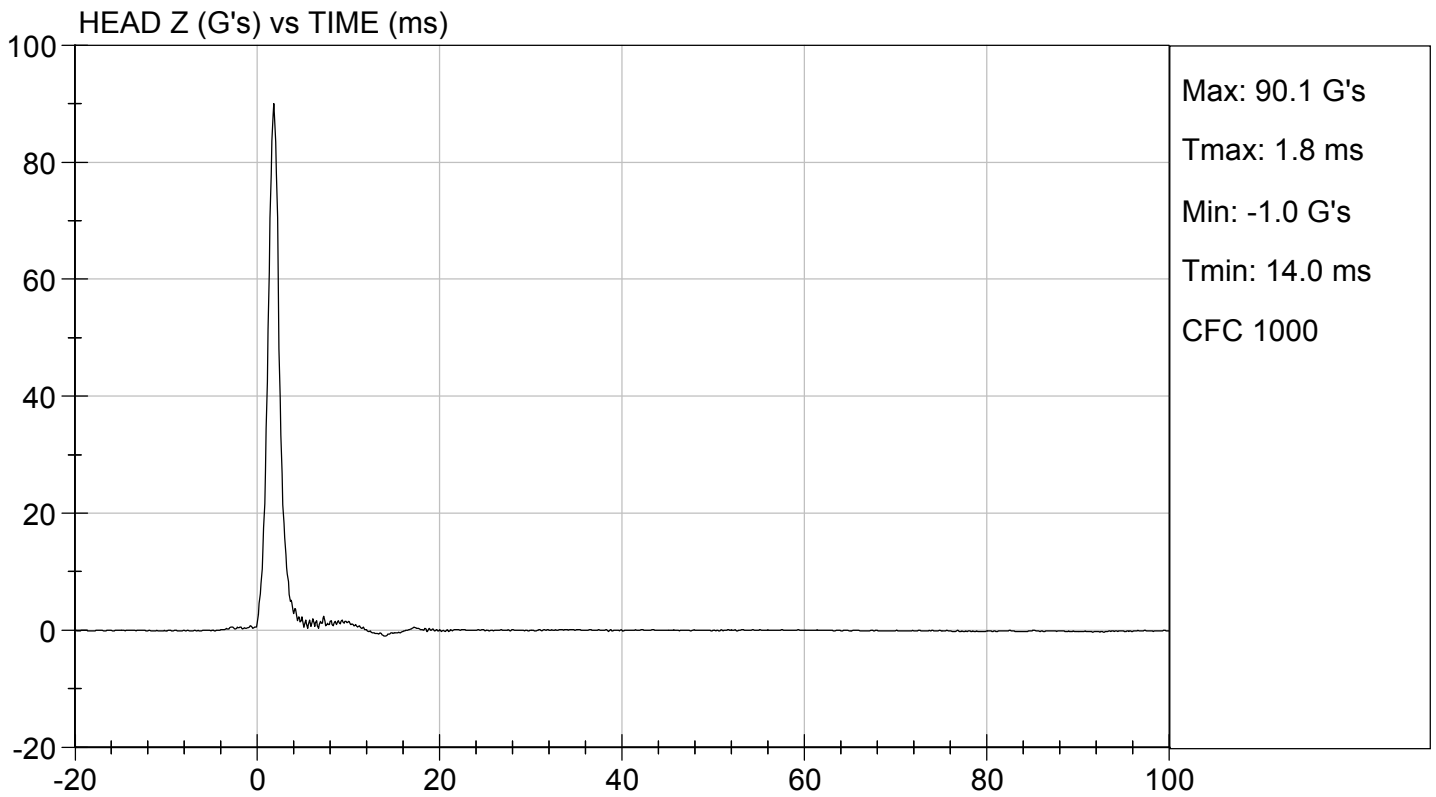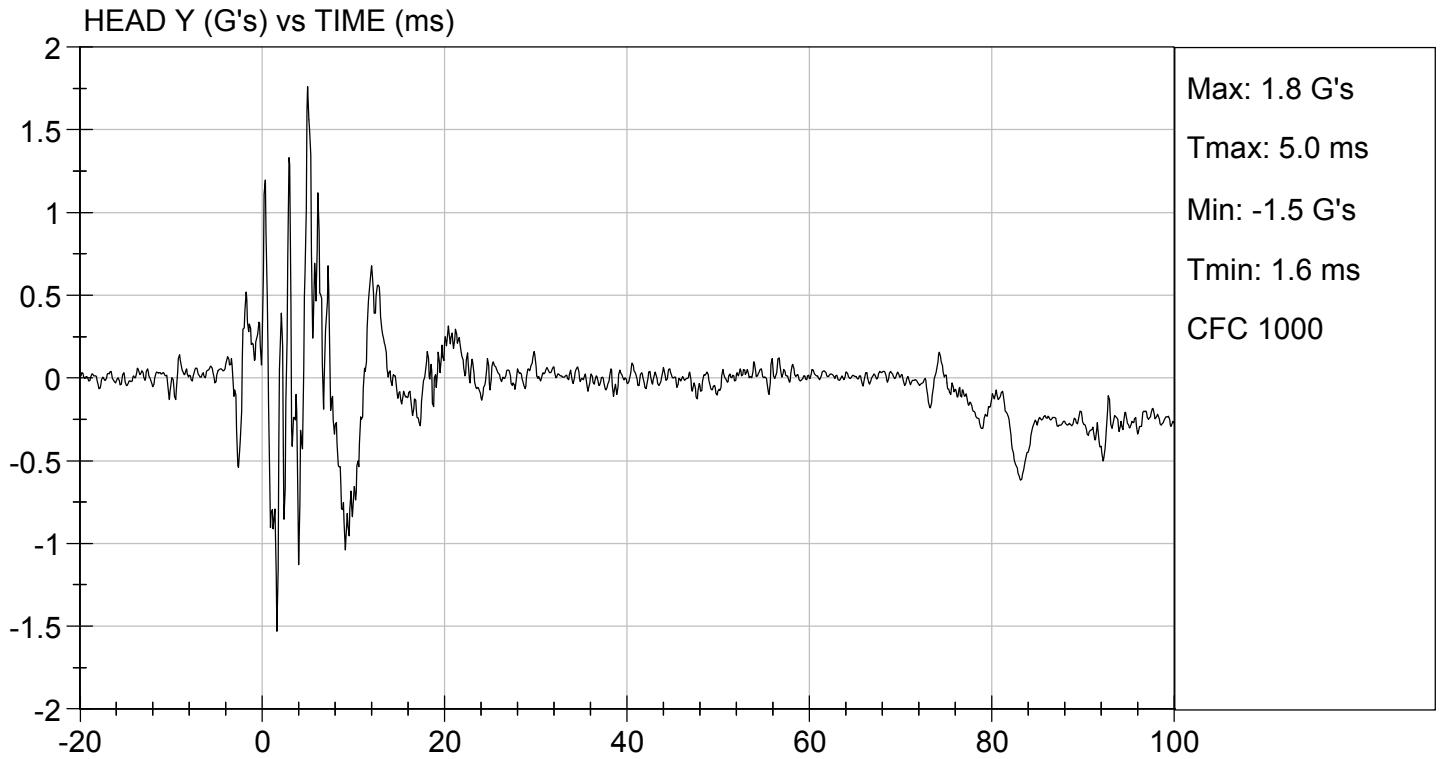

MGA RESEARCH CORPORATION
NECK FLEXION TEST
HYBRID III 50TH PERCENTILE MALE

ATD Serial No: 351



Test I.D.: D190932


Tested Parameter		Units	Specification	Result	Pass/Fail
Laboratory Temperature		deg C	20.6 to 22.2	22	Pass
Laboratory Relative Humidity		%	10 to 70	20	Pass
Pendulum Velocity		m/s	6.89 to 7.13	7.06	Pass
Pendulum Deceleration	10 ms	G's	22.50 to 27.50	23.99	Pass
	20 ms	G's	17.60 to 22.60	20.59	Pass
	30 ms	G's	12.50 to 18.50	17.16	Pass
Peak Pendulum Deceleration After 30 ms		G's	<= 29.0	17.1	Pass
Deceleration Decay Time to Cross 5 G's		ms	34.0 to 42.0	34.9	Pass
Maximum "D" Plane Rotation	Maximum	Deg	64.0 to 78.0	74.7	Pass
	Time	ms	57.0 to 64.0	59.5	Pass
"D" Plane Rotation Decay Time To Zero Crossing		ms	113.0 to 128.0	120.7	Pass
Moment About Occipital Condyle	Maximum	Nm	88.1 to 108.5	89.4	Pass
	Time	ms	47.0 to 58.0	49.4	Pass
Positive Moment Decay Time To Zero Crossing		ms	97.0 to 107.0	97.1	Pass
Overall Test Results					Pass

Danielle Redinlaugh
 Laboratory Technician

03/08/2019
 Test Date

Robert Schaub
 Approved By

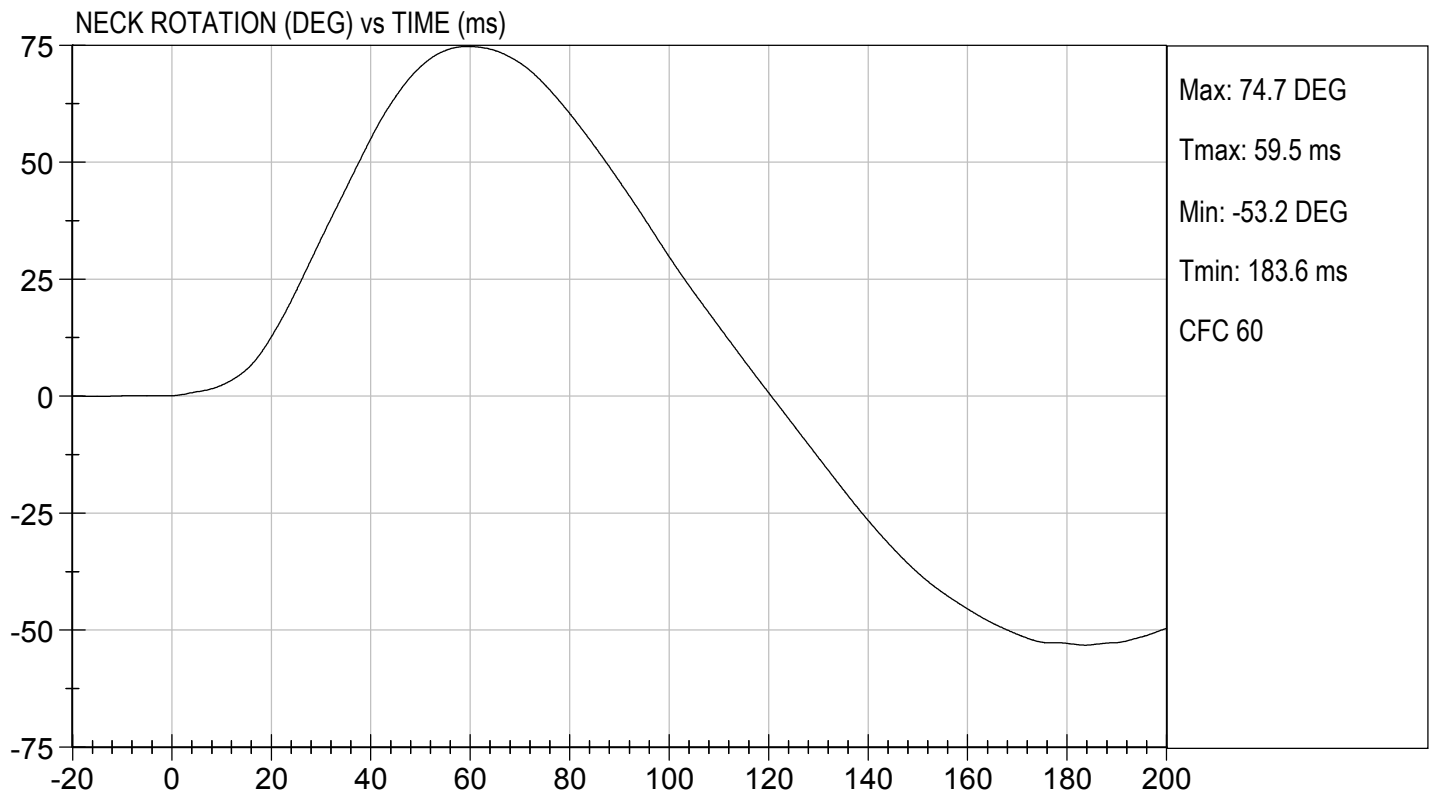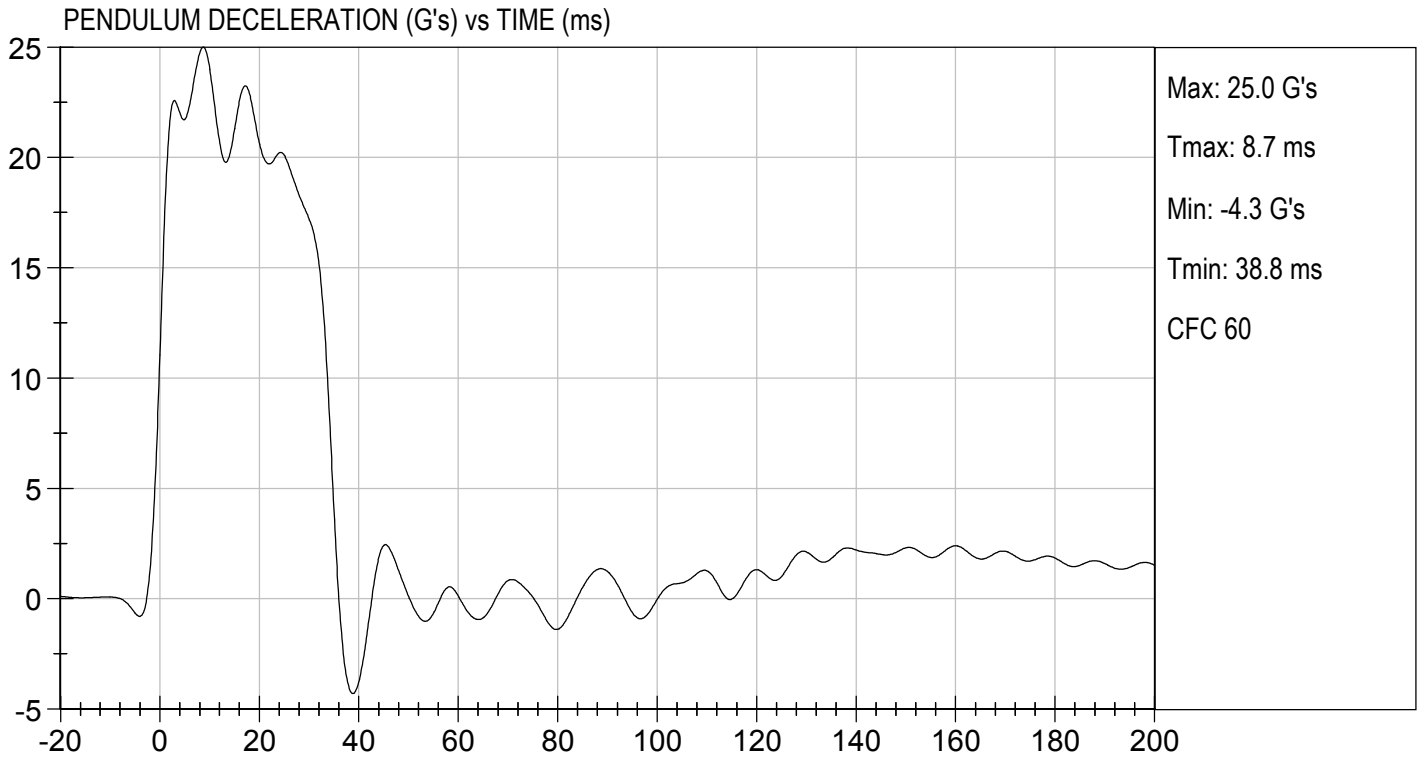

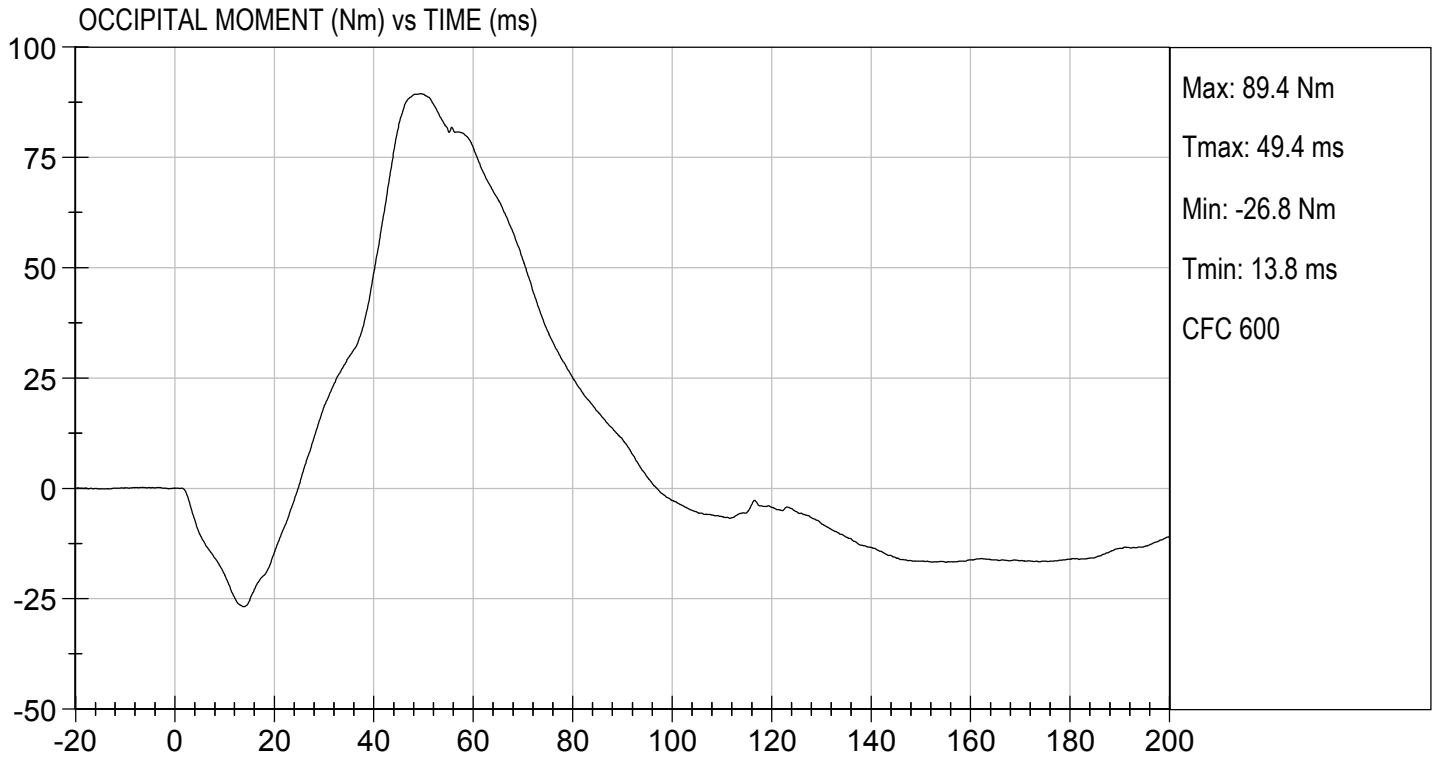

MGA RESEARCH CORPORATION
NECK EXTENSION TEST
HYBRID III 50TH PERCENTILE MALE


ATD Serial No: 351



Test I.D.: D190933


Tested Parameter		Units	Specification	Result	Pass/Fail
Laboratory Temperature		deg C	20.6 to 22.2	22	Pass
Laboratory Relative Humidity		%	10 to 70	20	Pass
Pendulum Velocity		m/s	5.95 to 6.19	6.12	Pass
Pendulum Deceleration	10 ms	G's	17.20 to 21.20	18.55	Pass
	20 ms	G's	14.00 to 19.00	16.22	Pass
	30 ms	G's	11.00 to 16.00	11.97	Pass
Peak Pendulum Deceleration After 30 ms		G's	<= 22.0	13.1	Pass
Deceleration Decay Time to Cross 5 G's		ms	38.0 to 46.0	40.5	Pass
Maximum "D" Plane Rotation	Maximum	Degrees	81.0 to 106.0	103.5	Pass
	Time	ms	72.0 to 82.0	78.4	Pass
"D" Plane Rotation Decay Time To Zero Crossing		ms	147.0 to 174.0	166.5	Pass
Moment About Occipital Condyle	Maximum	Nm	-52.9 to -79.9	-60.2	Pass
	Time	ms	65.0 to 79.0	73.5	Pass
Negative Moment Decay Time To Zero Crossing		ms	120.0 to 148.0	147.8	Pass
Overall Test Results					Pass


 Laboratory Technician

03/08/2019
 Test Date


 Approved By

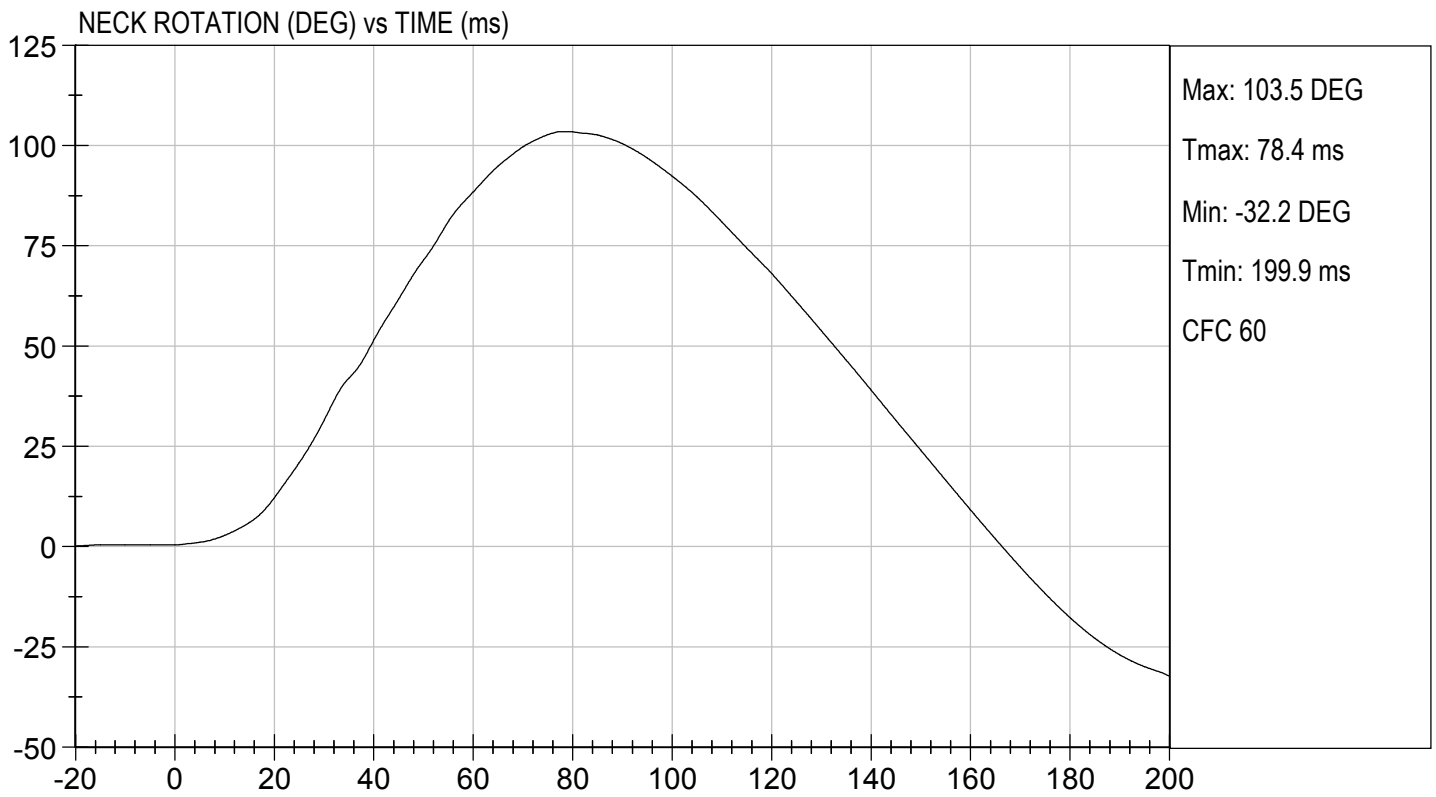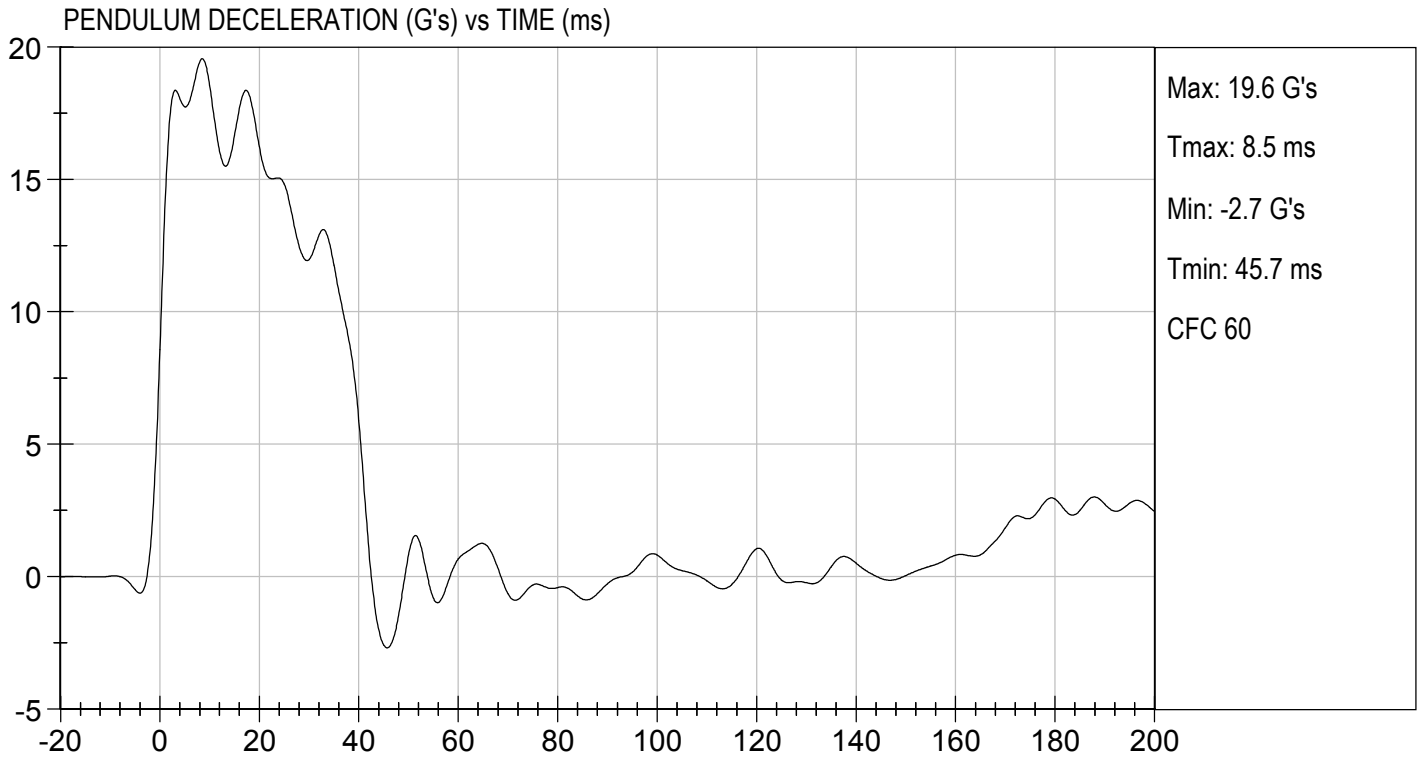

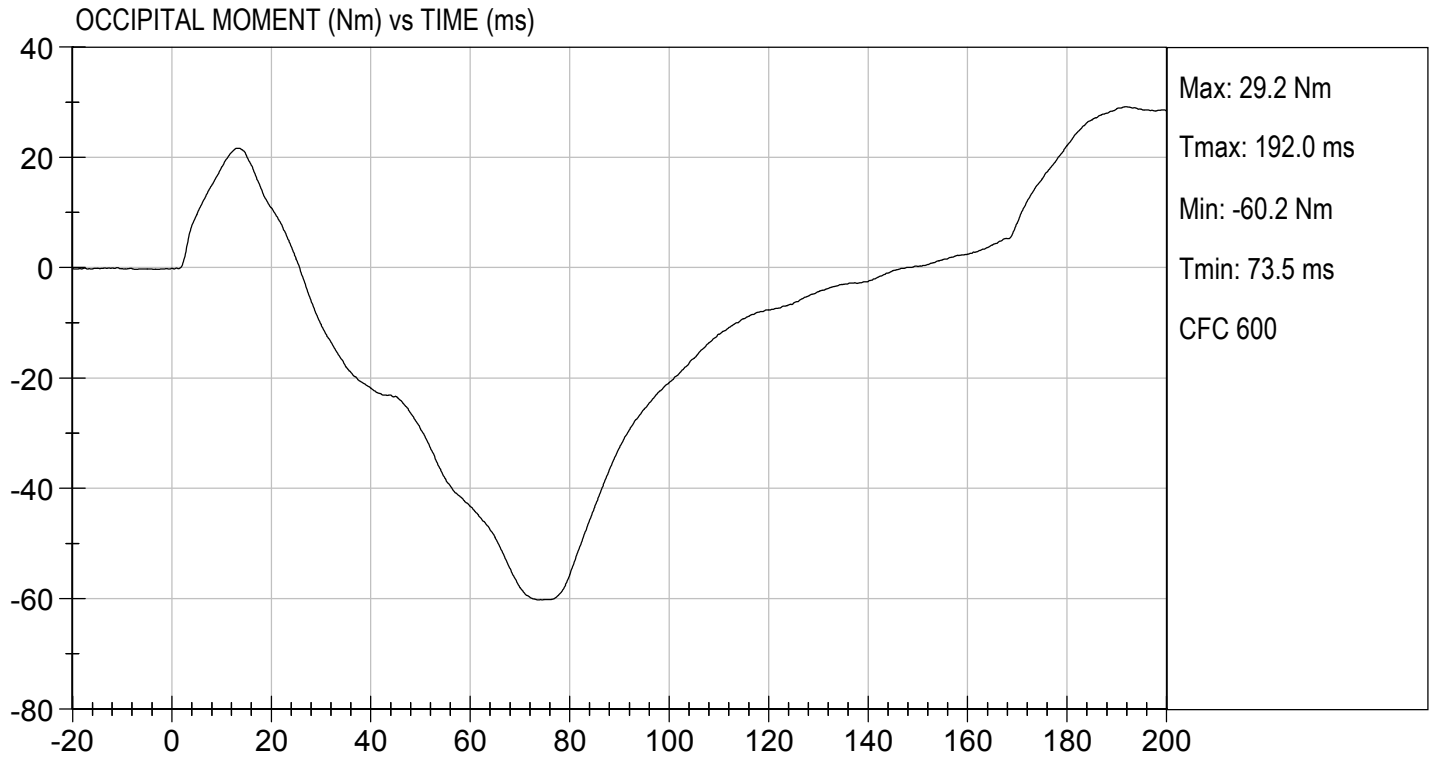


MGA RESEARCH CORPORATION
THORAX IMPACT
HYBRID III 50TH PERCENTILE MALE


ATD Serial No: 351


Test I.D: D190934

Tested Parameter	Units	Specification	Result	Pass/Fail
Laboratory Temperature	deg C	20.6 to 22.2	21.2	Pass
Laboratory Relative Humidity	%	10 to 70	17	Pass
Probe Velocity	m/s	6.58 to 6.82	6.68	Pass
Peak Probe Force	N	5159 to 5893	5,356	Pass
Peak Sternum Displacement	cm	6.35 to 7.26	6.84	Pass
Internal Hysteresis	%	69 to 85	72	Pass
Overall Test Results				Pass


 Laboratory Technician

03/08/2019
 Test Date


 Approved By

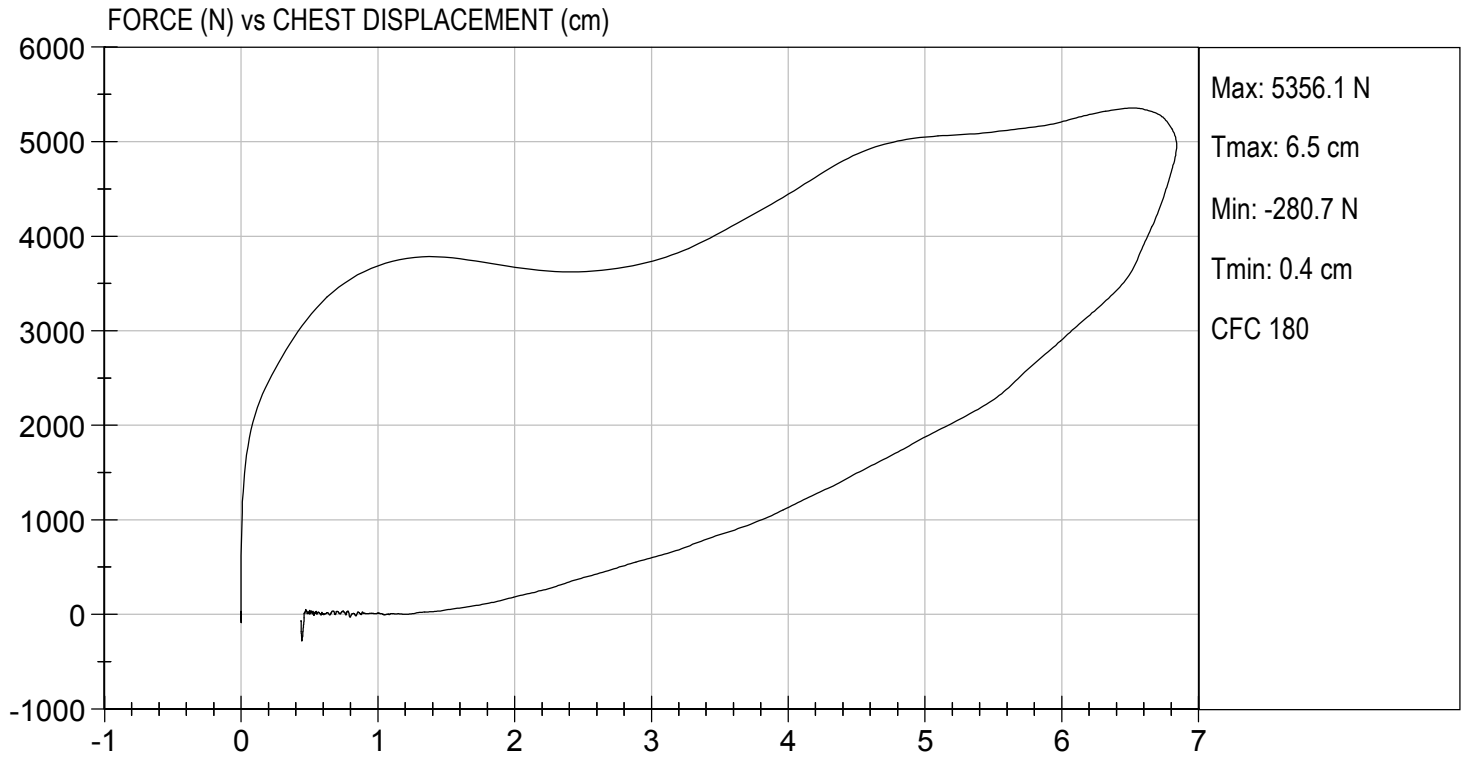

MGA RESEARCH CORPORATION
RIGHT KNEE IMPACT TEST
HYBRID III 50TH PERCENTILE MALE


ATD Serial No: 351

Test I.D: D190935

Tested Parameter	Units	Specification	Result	Pass/Fail
Laboratory Temperature	deg C	18.9 to 25.6	21.8	Pass
Laboratory Relative Humidity	%	10 to 70	23	Pass
Probe Velocity	m/s	2.07 to 2.13	2.13	Pass
Peak Probe Force	N	4715 to 5782	5,378	Pass
Overall Test Results				Pass


Laboratory Technician


03/11/2019
Test Date


Approved By



TEST DESC: RIGHT KNEE
VELOCITY: 7.00 ft/s, 2.13 m/s

TEST DATE: 03/11/2019
TEST #: D190935

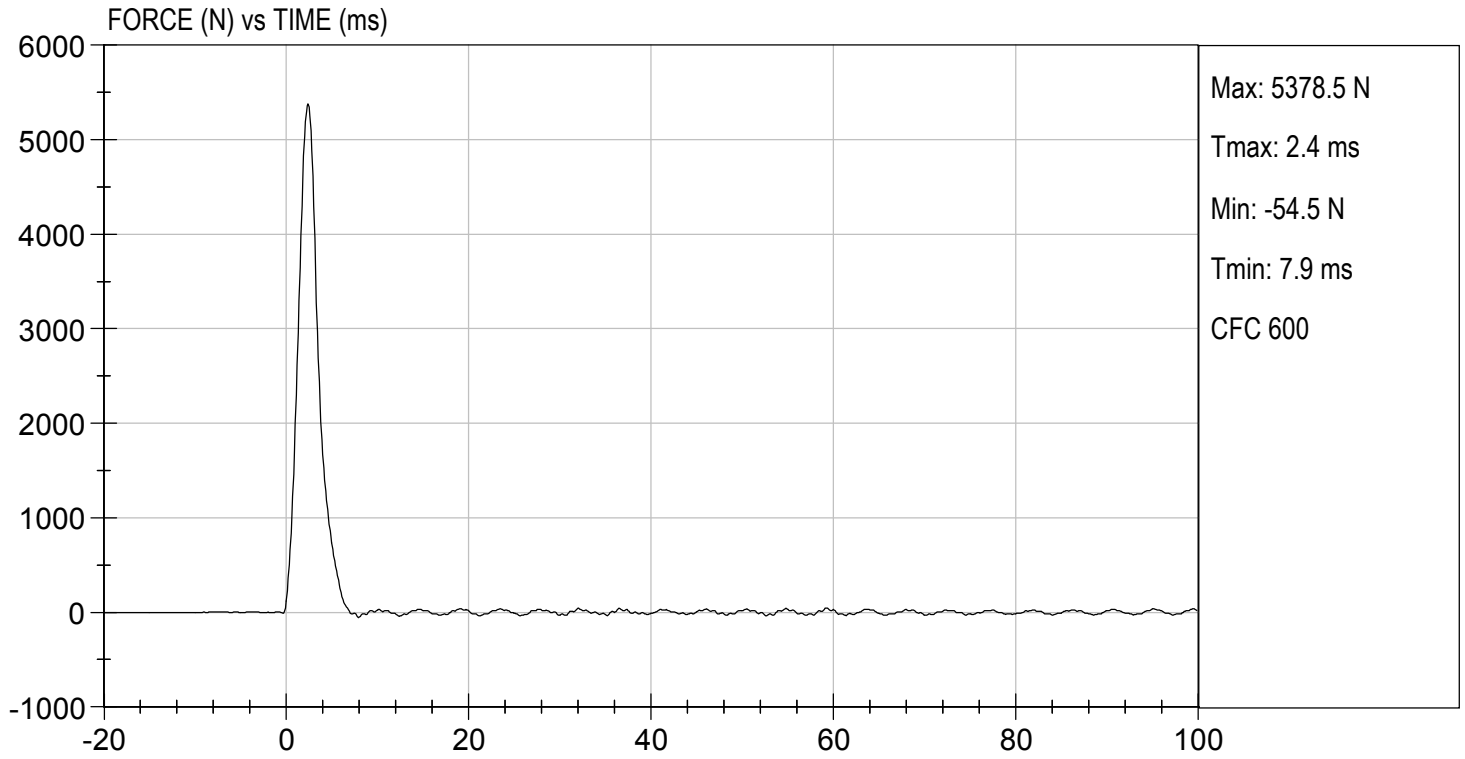

MGA RESEARCH CORPORATION
LEFT KNEE IMPACT TEST
HYBRID III 50TH PERCENTILE MALE

ATD Serial No: 351

Test I.D: D190936

Tested Parameter	Units	Specification	Result	Pass/Fail
Laboratory Temperature	deg C	18.9 to 25.6	21.8	Pass
Laboratory Relative Humidity	%	10 to 70	23	Pass
Probe Velocity	m/s	2.07 to 2.13	2.12	Pass
Peak Probe Force	N	4715 to 5782	5,119	Pass
Overall Test Results				Pass

Danielle Redinlaugh
 Laboratory Technician


03/11/2019
 Test Date

Robert Schaefer
 Approved By



TEST DESC: LEFT KNEE
VELOCITY: 6.94 ft/s, 2.12 m/s

TEST DATE: 03/11/2019
TEST #: D190936

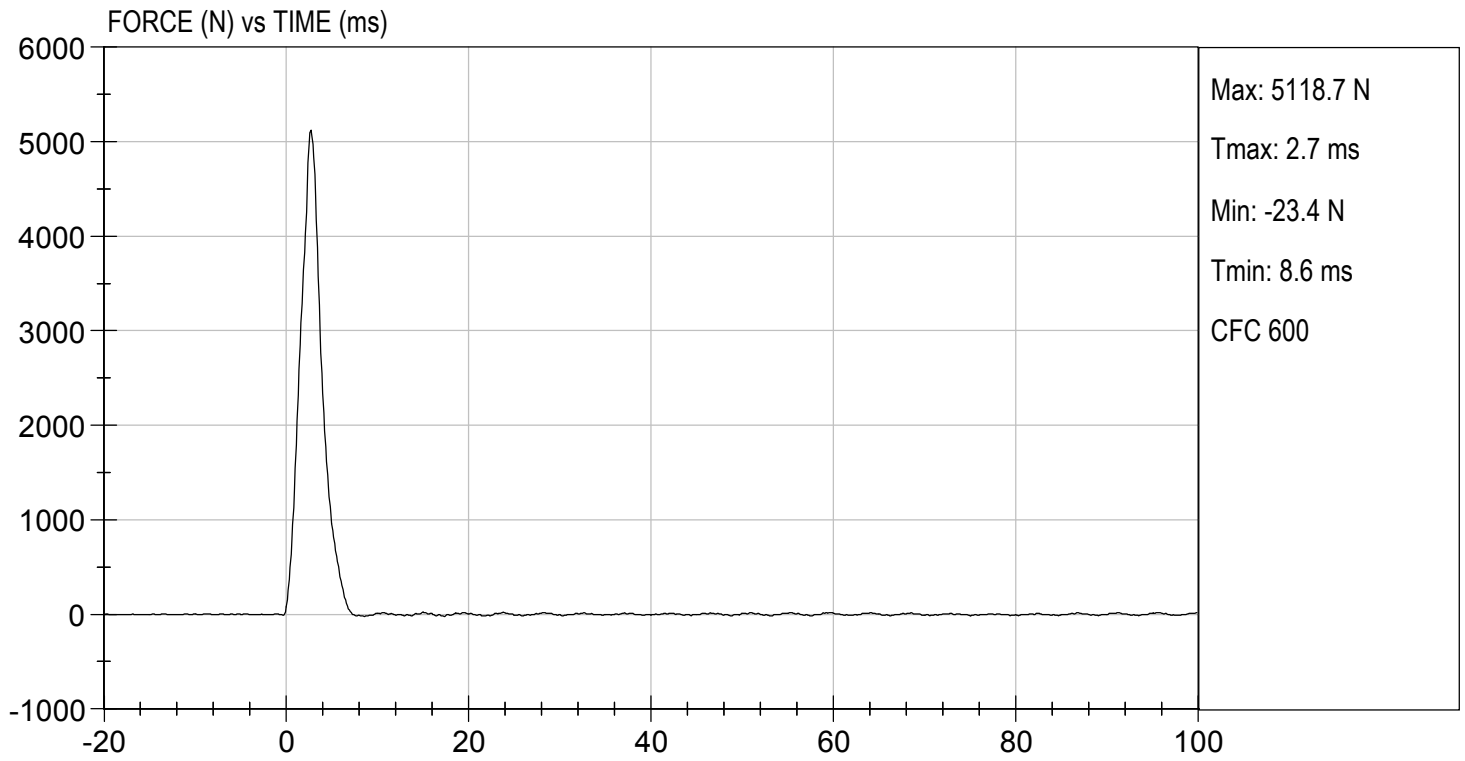

**MGA RESEARCH CORPORATION
HIP-FEMUR FLEXION TEST
HYBRID III 50TH PERCENTILE MALE**

ATD Serial No: 351


Test I.D: D190930


Tested Parameter	Units	Specification	Result		Pass/Fail
			Right	Left	
Laboratory Temperature	deg C	18.9 to 25.6	21.4	21.4	Pass
Laboratory Relative Humidity	%	10 to 70	23	23	Pass
Rotation Rate	deg/s	5.0 to 10.0	6.5	6.4	Pass
30 Degrees	Nm	94.9 Nm Max	87.9	84.4	Pass
150 ft-lbf / 203.4 Nm	Deg	40.0 to 50.0 Degree Max Rotation	47.2	44.7	Pass
Overall Test Results					Pass

Danielle Redinlaugh
Laboratory Technician

03/11/2019
Test Date

Robert Schaefer
Approved By

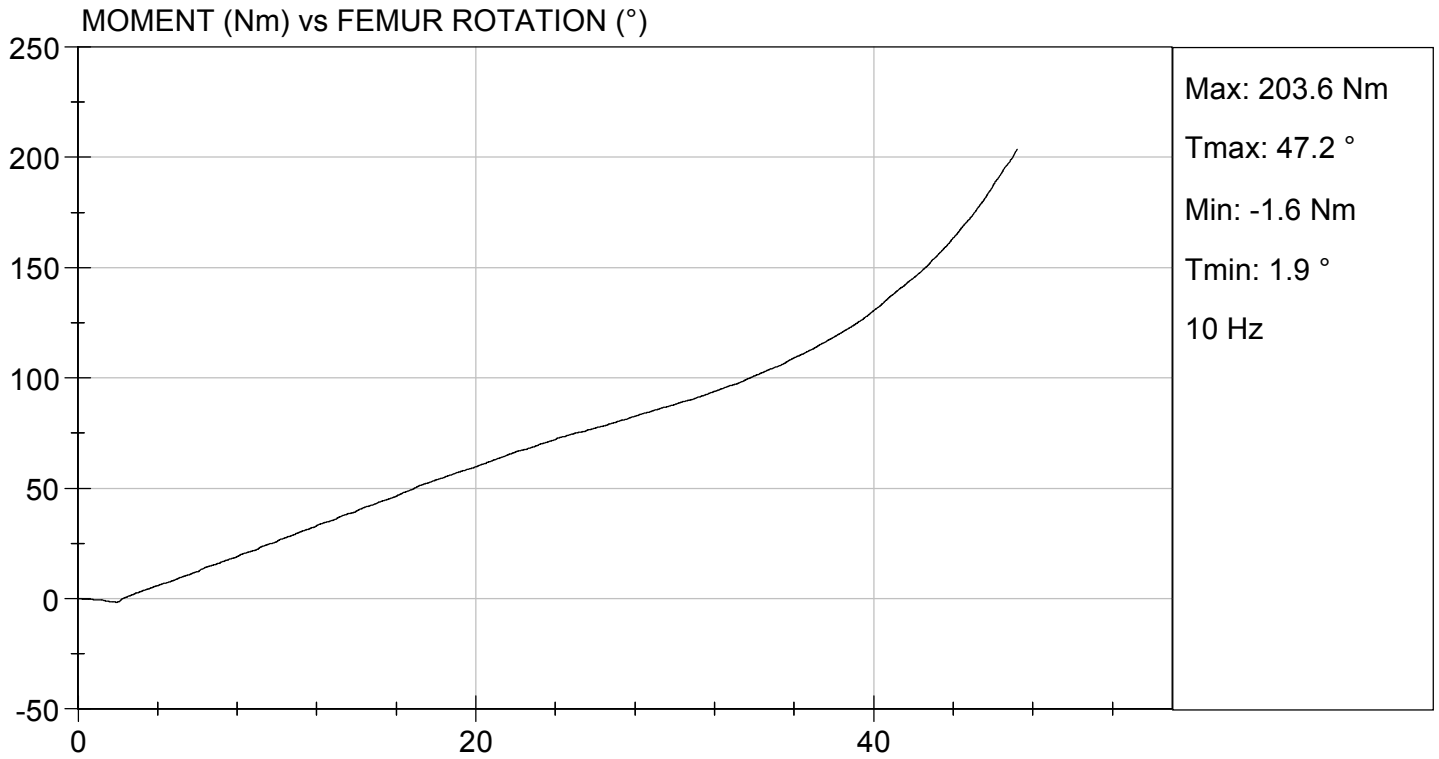

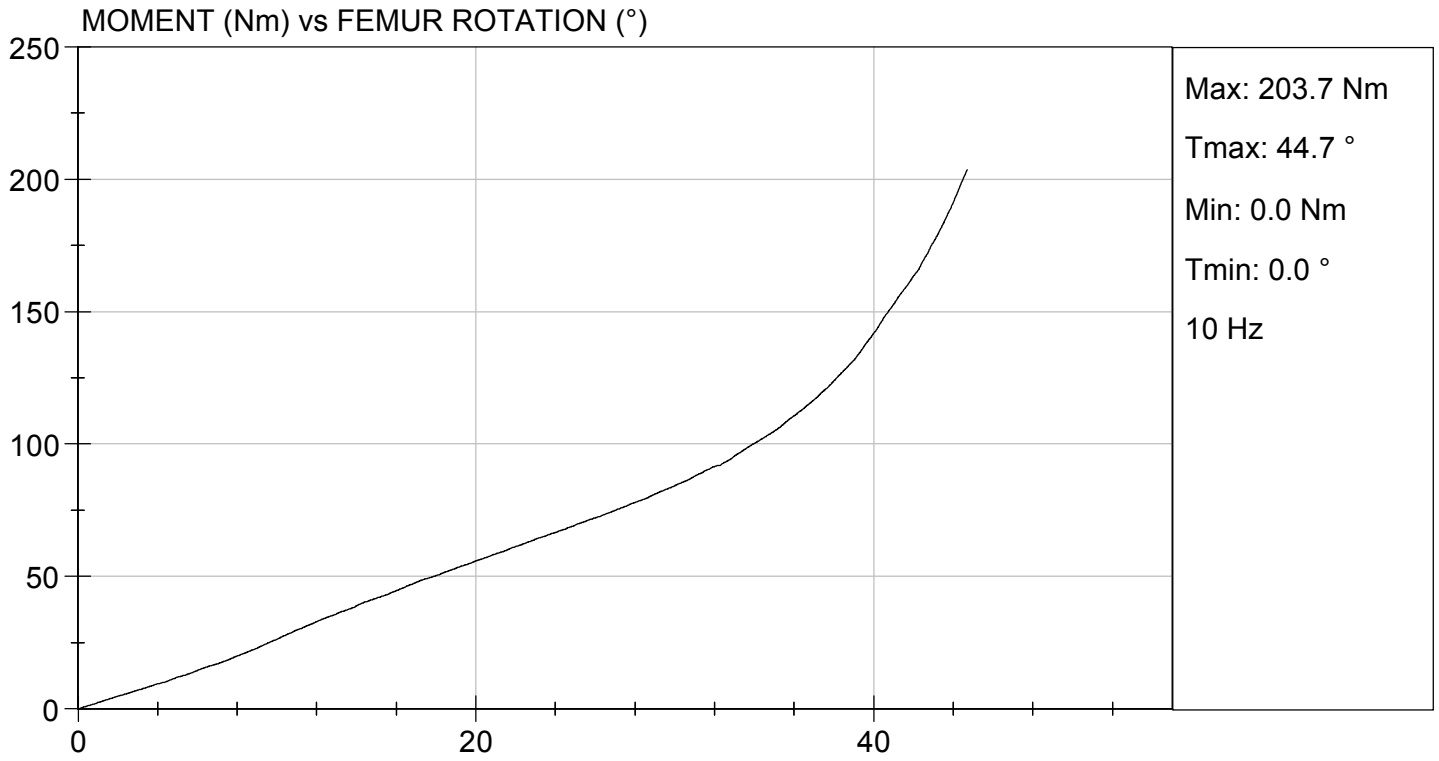

CALIBRATION TEST RESULTS

PRE-TEST

HYBRID III 5TH PERCENTILE FEMALE - PASSENGER ATD

**Hybrid III, 5th External Measurements
SN: DH1659**

HYBRID III, PART 572, SUBPART O EXTERNAL DIMENSIONS				
DIMENSION	DESCRIPTION	DETAILS	ASSEMBLY DIMENSION (mm)	ACTUAL MEASUREMENT
A	TOTAL SITTING HEIGHT	Seat surface to highest point on top of the head.	774.7-800.1	778
B	SHOULDER PIVOT HEIGHT	Centerline of shoulder pivot bolt to the seat surface.	431.8-457.2	440
C	H-POINT HEIGHT	Reference	81.3-86.3	85
D	H-POINT LOCATION FROM BACKLINE	Reference	144.8-149.8	147
E	SHOULDER PIVOT FROM BACKLINE	Center of the shoulder clevis to the rear vertical surface of the fixture.	68.6-83.8	82
F	THIGH CLEARANCE	Measured at the highest point on the upper femur segment.	119.4-134.6	130
G	BACK OF ELBOW TO WRIST PIVOT	back of the elbow flesh to the wrist pivot in line with the elbow and wrist pivots	243.9-259.1	251
H	HEAD BACK TO BACKLINE	Back of Skull cap skin to seat rear vertical surface (Reference)	43.2-48.2	45
I	SHOULDER TO- ELBOW LENGTH	Measure from the highest point on top of the shoulder clevis to the lowest part of the flesh on the elbow in line with the elbow pivot bolt.	276.8-297.2	285
J	ELBOW REST HEIGHT	Measure from the flesh below the elbow pivot bolt to the seat surface.	182.8-203.2	189
K	BUTTOCK TO KNEE LENGTH	The forward most part of the knee flesh to the rear vertical surface of the fixture.	520.7-546.1	543
L	POPLITEAL HEIGHT	Seat surface to the plane of the horizontal plane of the bottom of the feet.	355.6-376	357
M	KNEE PIVOT HEIGHT	Centerline of knee pivot bolt to the horizontal plane of the bottom of the feet.	393.7-419.1	398
N	BUTTOCK POPLITEAL LENGTH	The rearmost surface of the lower leg to the same point on the rear surface of the buttocks used for dim. "K".	414-439.4	435

HYBRID III, SUBPART O EXTERNAL DIMENSIONS, continued				
DIMENSION	DESCRIPTION	DETAILS	ASSEMBLY DIMENSION (mm)	ACTUAL MEASUREMENT
O	CHEST DEPTH WITHOUT JACKET	Measured 304.8 ± 5.1 mm above seat surface	175.3-190.5	182
P	FOOT LENGTH	Tip of toe to rear of heal	218.5-233.7	221
Q	STANDING HEIGHT	(THEORETICAL)	1501.1	N/A
R	BUTTOCK TO KNEE PIVOT LENGTH	The rear surface of the buttocks to the knee pivot bolt	457.2-482.6	469
S	HEAD BREADTH	The widest part of the head	137.1-147.3	141
T	HEAD DEPTH	Back of the head to the forehead	177.8-188	182
U	HIP BREADTH	The widest part of the hip	299.7-314.9	306
V	SHOULDER BREADTH	Outside edges of right and left shoulder clevises	350.5-365.7	357
W	FOOT BREADTH	The widest part of the foot	78.8-94	83
X	HEAD CIRCUMFERENCE	Measured at the point as in dim. "T"	528.3-548.7	542
Y	CHEST CIRCUMFERENCE (WITH CHEST JACKET)	Measured 345.4 ± 12.7 mm above seat surface	850.9-881.3	865
Z	WAIST CIRCUMFERENCE	Measured 165.1 ± 5.1 mm above seat surface	759.5-789.9	785
AA	REFERENCE LOCATION FOR MEASUREMENT OF CHEST CIRCUMFERENCE	Reference	332.7-358.1	345
BB	REFERENCE LOCATION FOR MEASUREMENT OF WAIST CIRCUMFERENCE	Reference	160.1-170.2	165

**MGA RESEARCH CORPORATION
HEAD DROP TEST
HYBRID III 5TH PERCENTILE**

ATD Serial No: DH1659



Test ID: D190831



Tested Parameter	Units	Specification	Result	Pass/Fail
Laboratory Temperature	deg C	18.9 to 25.6	21.5	Pass
Laboratory Relative Humidity	%	10 to 70	21	Pass
Peak Resultant Acceleration	G's	250 to 300	296	Pass
Peak Lateral Acceleration	G's	<= +/- 15.0	-4.2	Pass
Unimodal	N/A	Yes	Yes	Pass
Oscillations	N/A	within 10% of peak	Yes	Pass
Overall Test Results				Pass

Danielle Redinlaugh
Laboratory Technician

03/01/2019
Test Date

Robert Schaub
Approved By

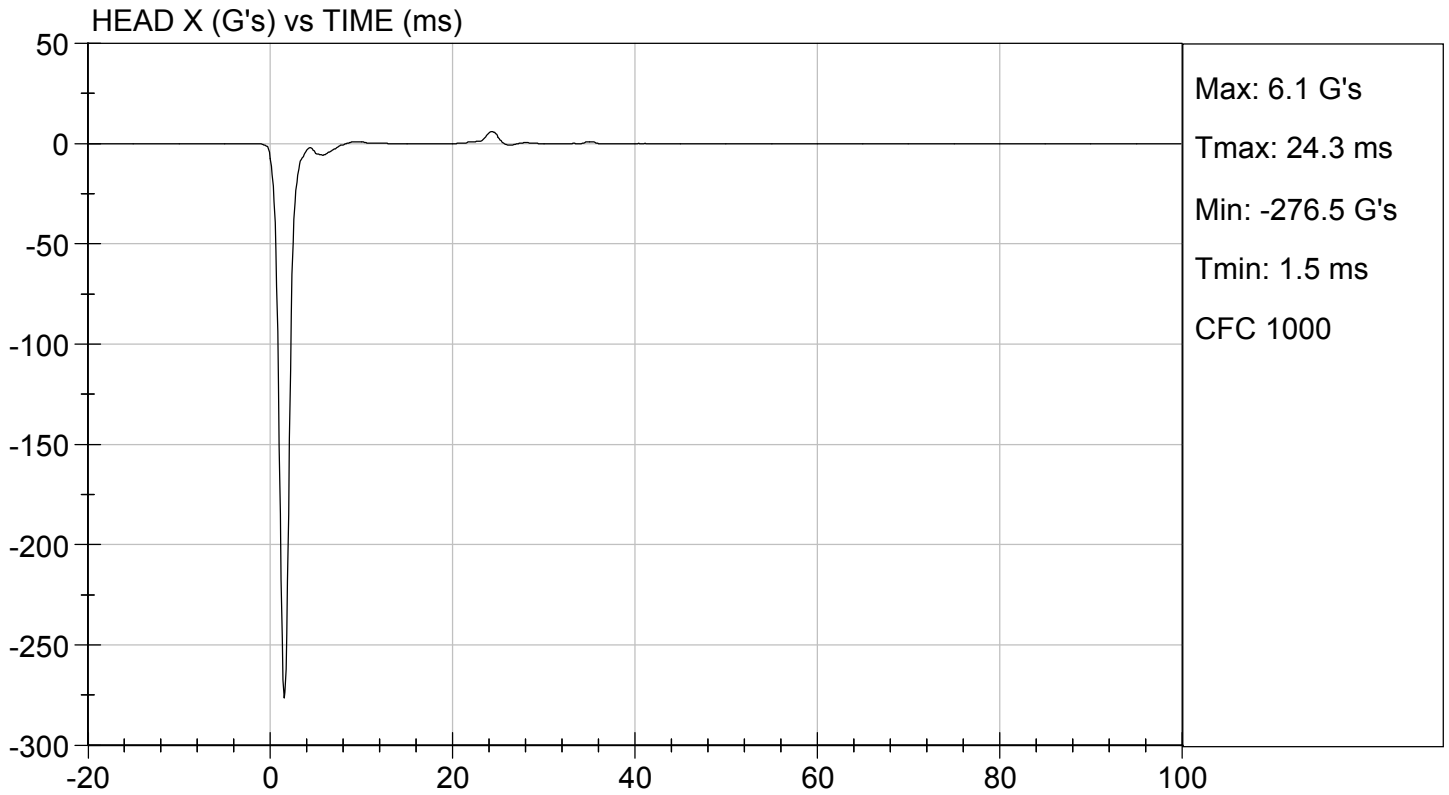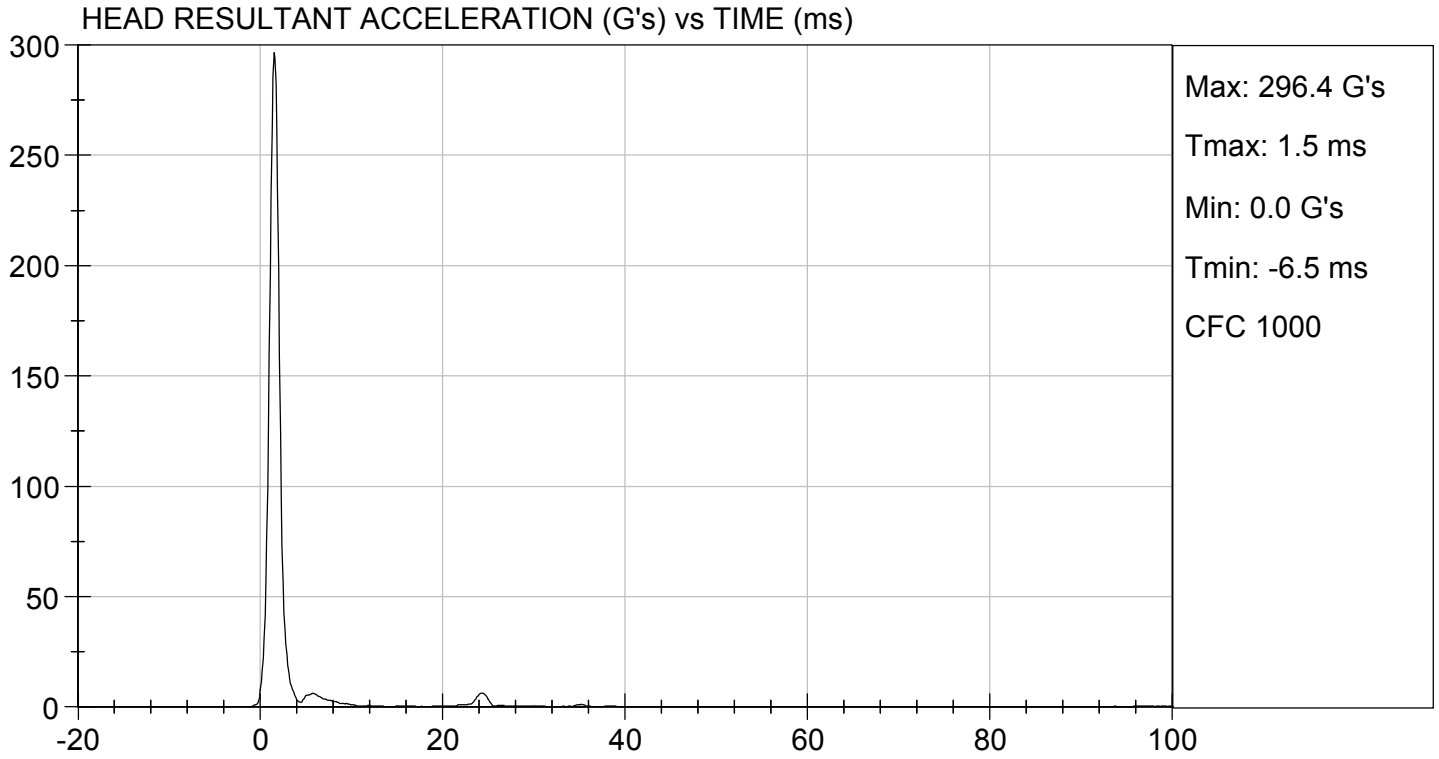

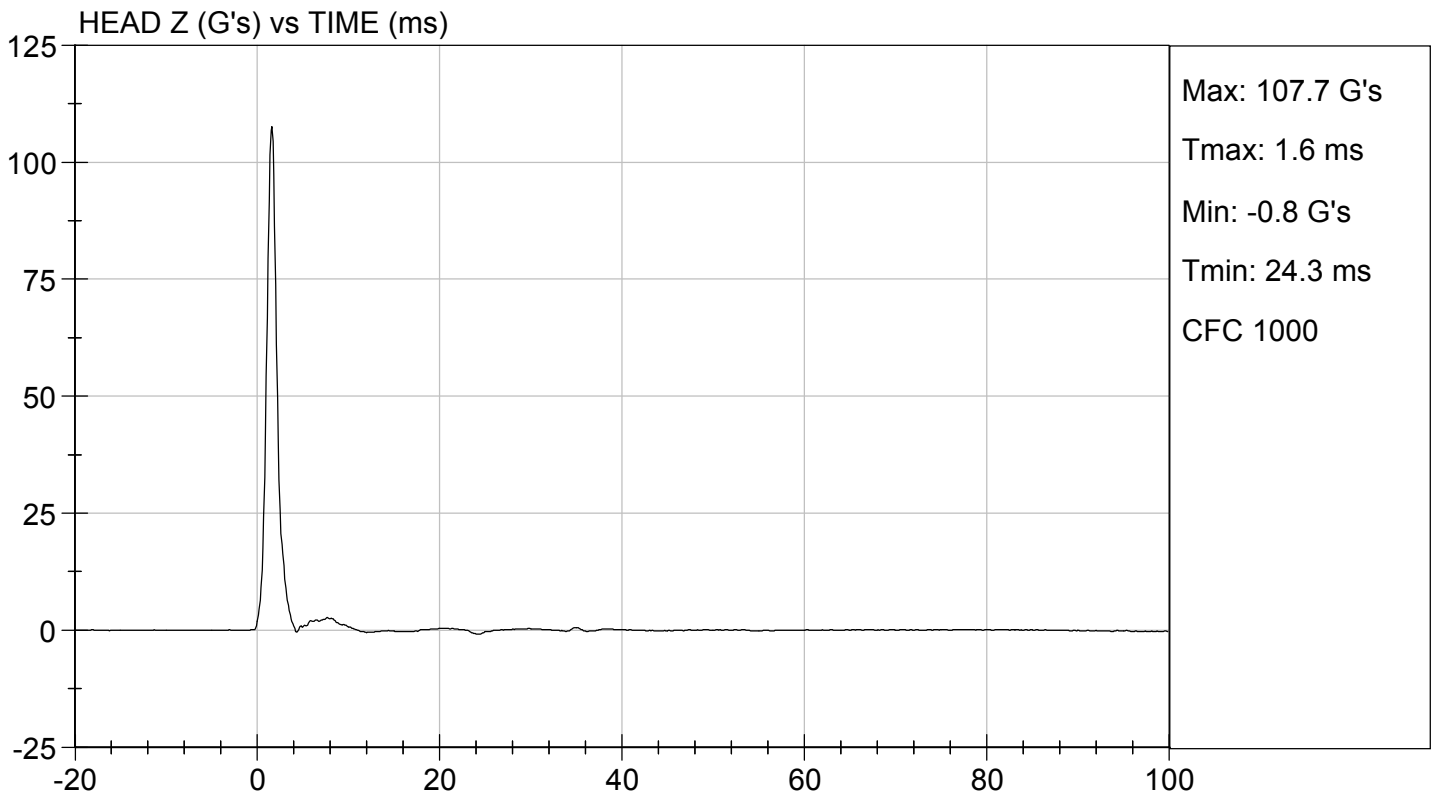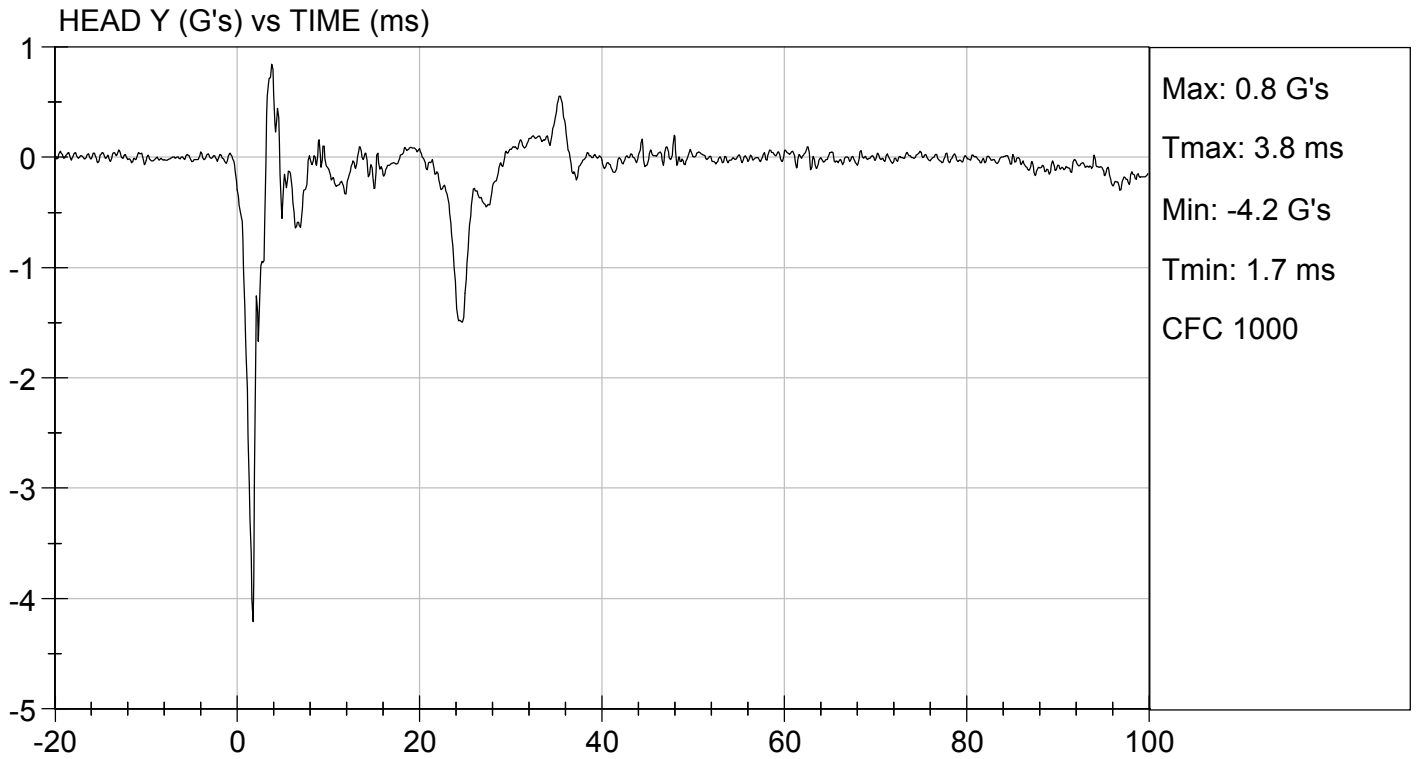

MGA RESEARCH CORPORATION

NECK FLEXION TEST

HYBRID III 5TH PERCENTILE

ATD Serial No: DH1659



Test I.D.: D190832


Tested Parameter		Units	Specification	Result	Pass/Fail
Laboratory Temperature		deg C	20.6 to 22.2	21	Pass
Laboratory Relative Humidity		%	10 to 70	11	Pass
Pendulum Speed		m/s	6.89 to 7.13	7.10	Pass
Pendulum Velocity	10 ms	m/s	2.1 to 2.5	2.2	Pass
	20 ms	m/s	4.0 to 5.0	4.6	Pass
	30 ms	m/s	5.8 to 7.0	6.8	Pass
D Plane Rotation	Max	deg	77 to 91	79	Pass
Occipital Condyle Moment within Rotation Corridor		Nm	69 to 83	71	Pass
Positive Moment Time Curve Decay to 10 Nm		ms	80 to 100	83	Pass
Overall Results					Pass

Danielle Redinlaugh
Laboratory Technician

 03/04/2019
Test Date

Robert Schumley
Approved By

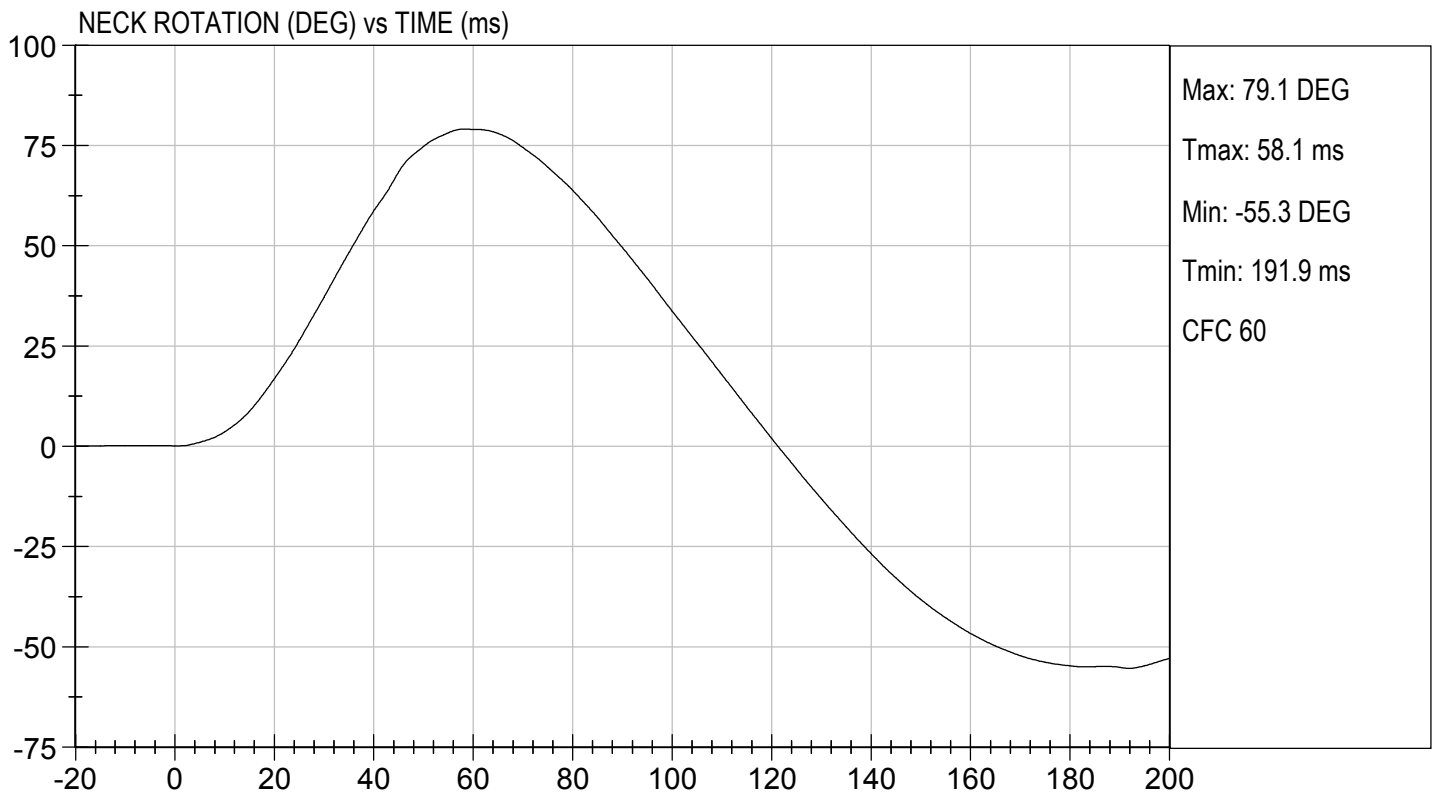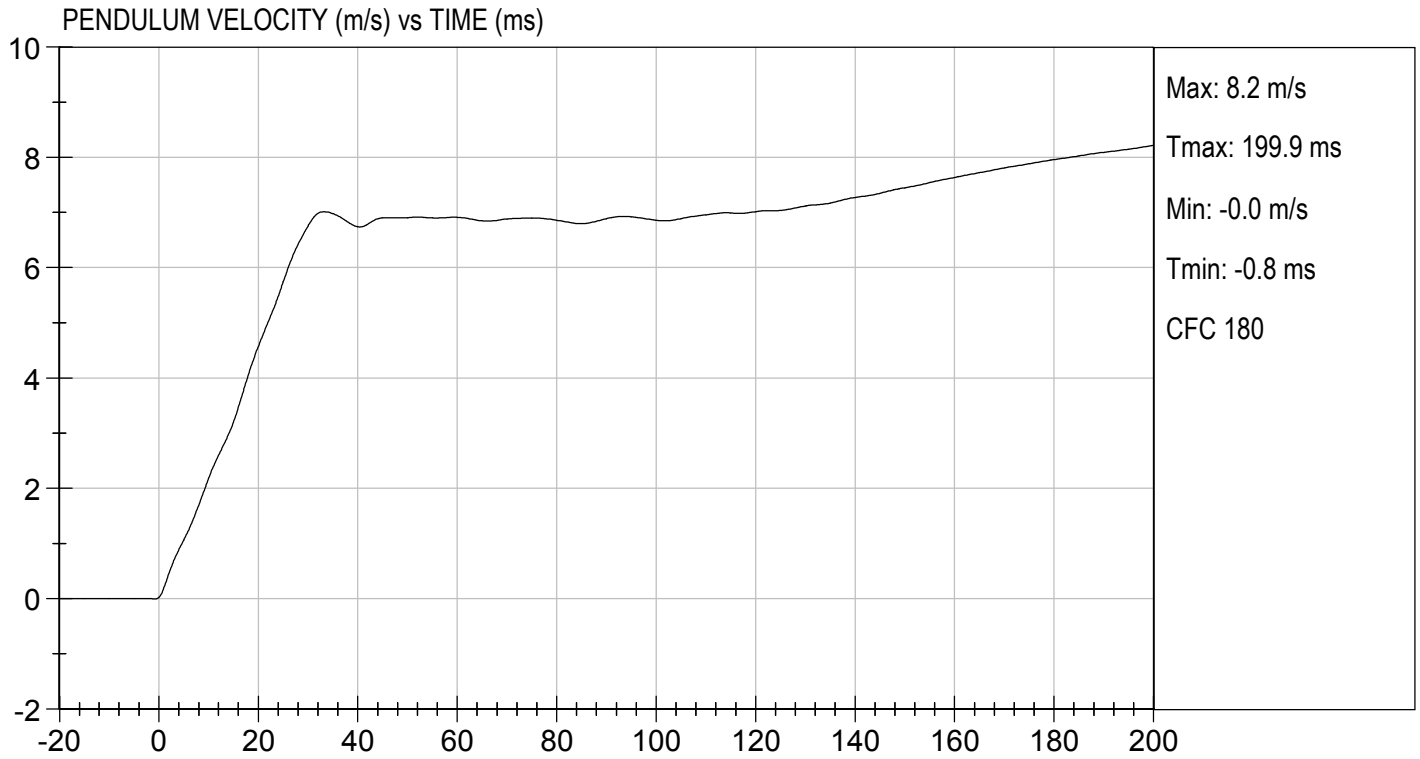

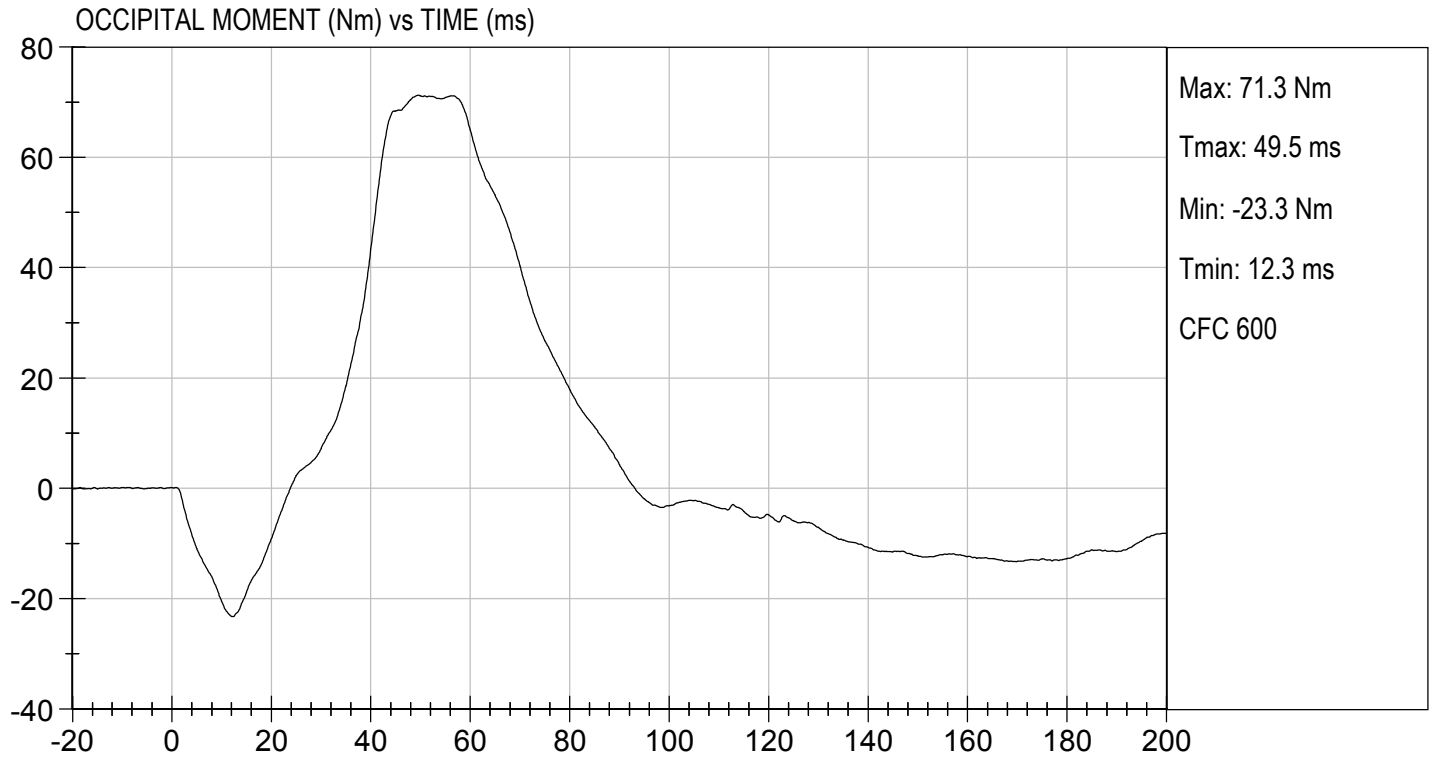

MGA RESEARCH CORPORATION
NECK EXTENSION TEST
HYBRID III 5TH PERCENTILE

ATD Serial No: DH1659

Test I.D: D190833

Tested Parameter		Units	Specification	Result	Pass/Fail
Laboratory Temperature		deg C	20.6 to 22.2	21	Pass
Laboratory Relative Humidity		%	10 to 70	11	Pass
Pendulum Speed		m/s	5.95 to 6.19	6.19	Pass
Pendulum Velocity	10 ms	m/s	1.5 to 1.9	1.7	Pass
	20 ms	m/s	3.1 to 3.9	3.6	Pass
	30 ms	m/s	4.6 to 5.6	5.2	Pass
D Plane Rotation	Max	deg	99 to 114	105	Pass
Occipital Condyle Moment within Rotation Corridor		Nm	-65 to -53	-54	Pass
Negative Moment Time Curve Decay to -10 Nm		ms	94 to 114	102	Pass
Overall Results					Pass

Danielle Redinlaugh



 Laboratory Technician


03/04/2019

 Test Date

Robert Schaub

 Approved By

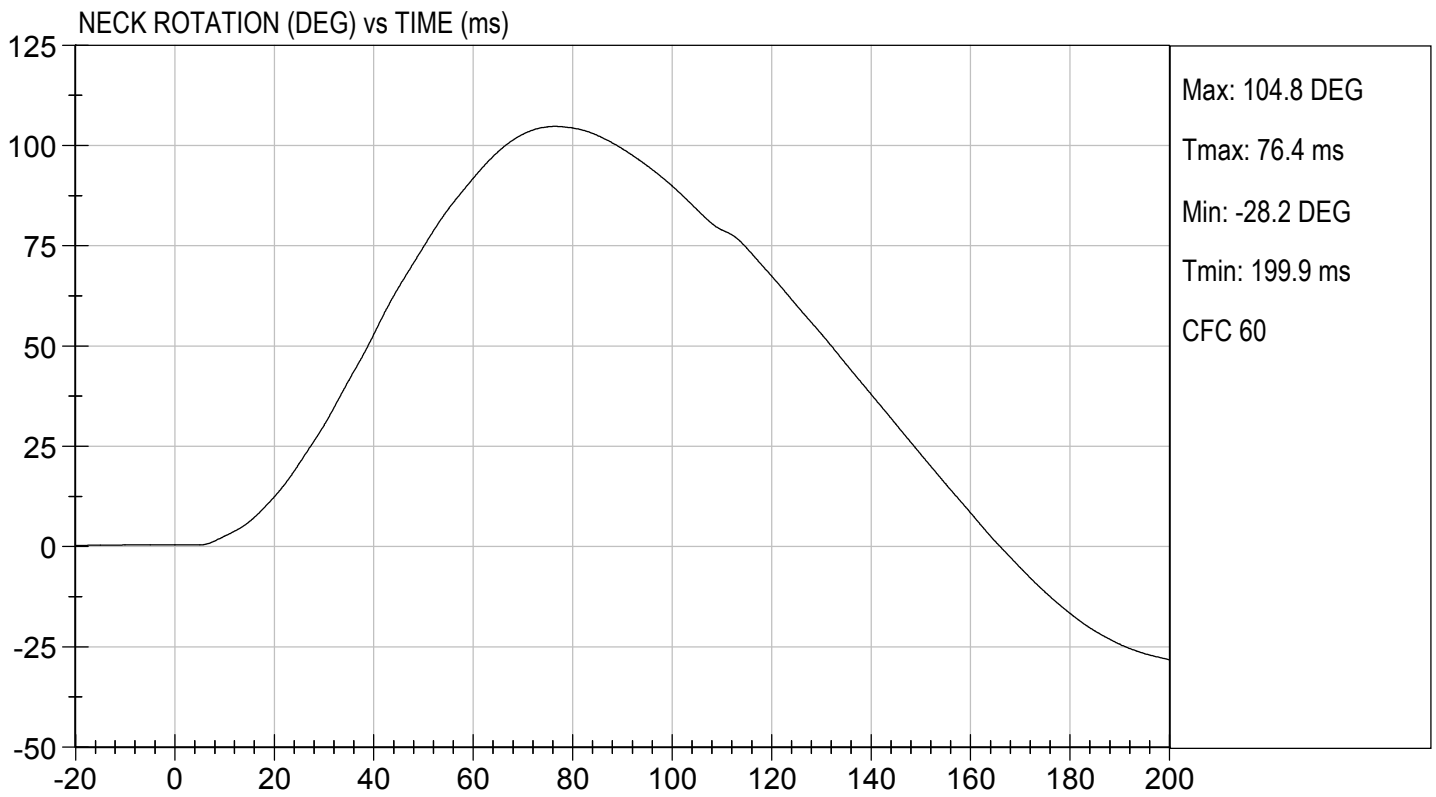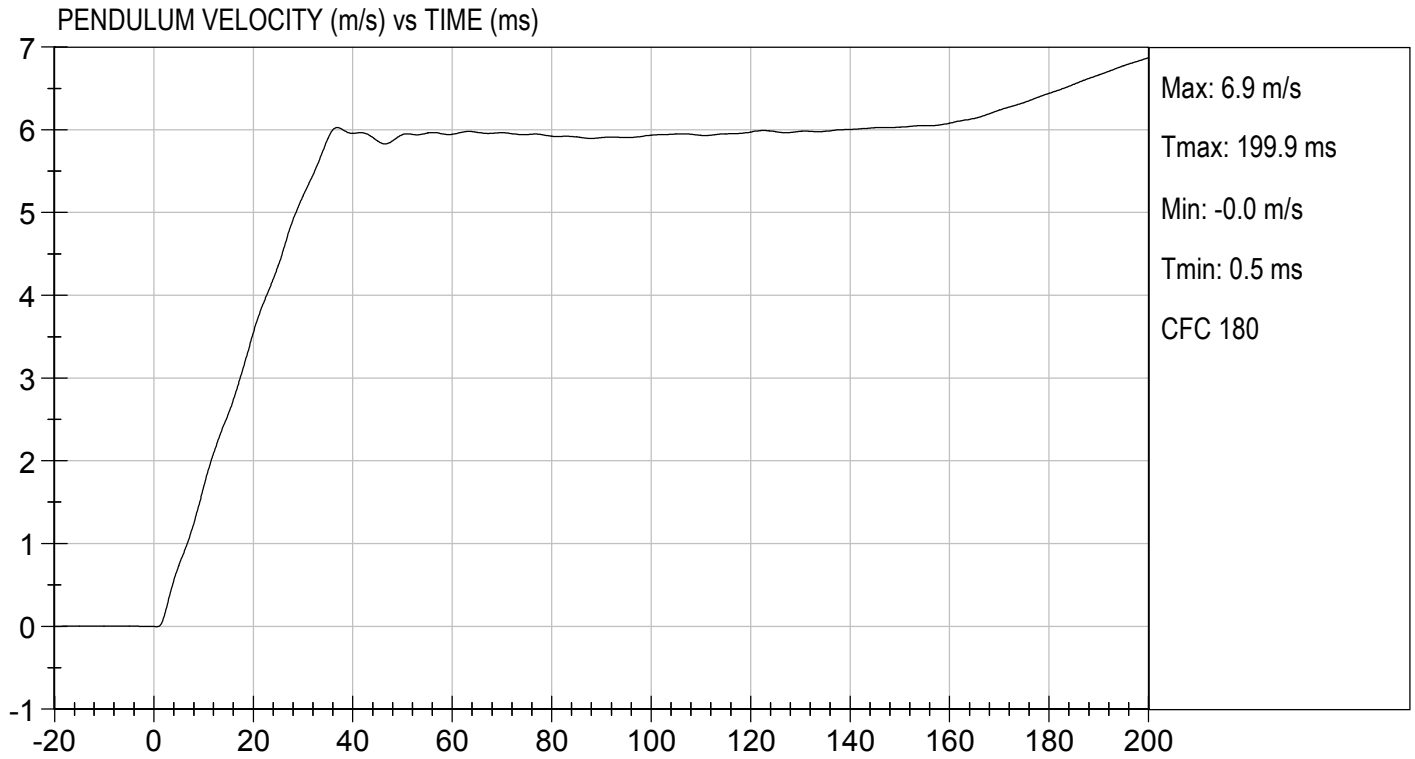

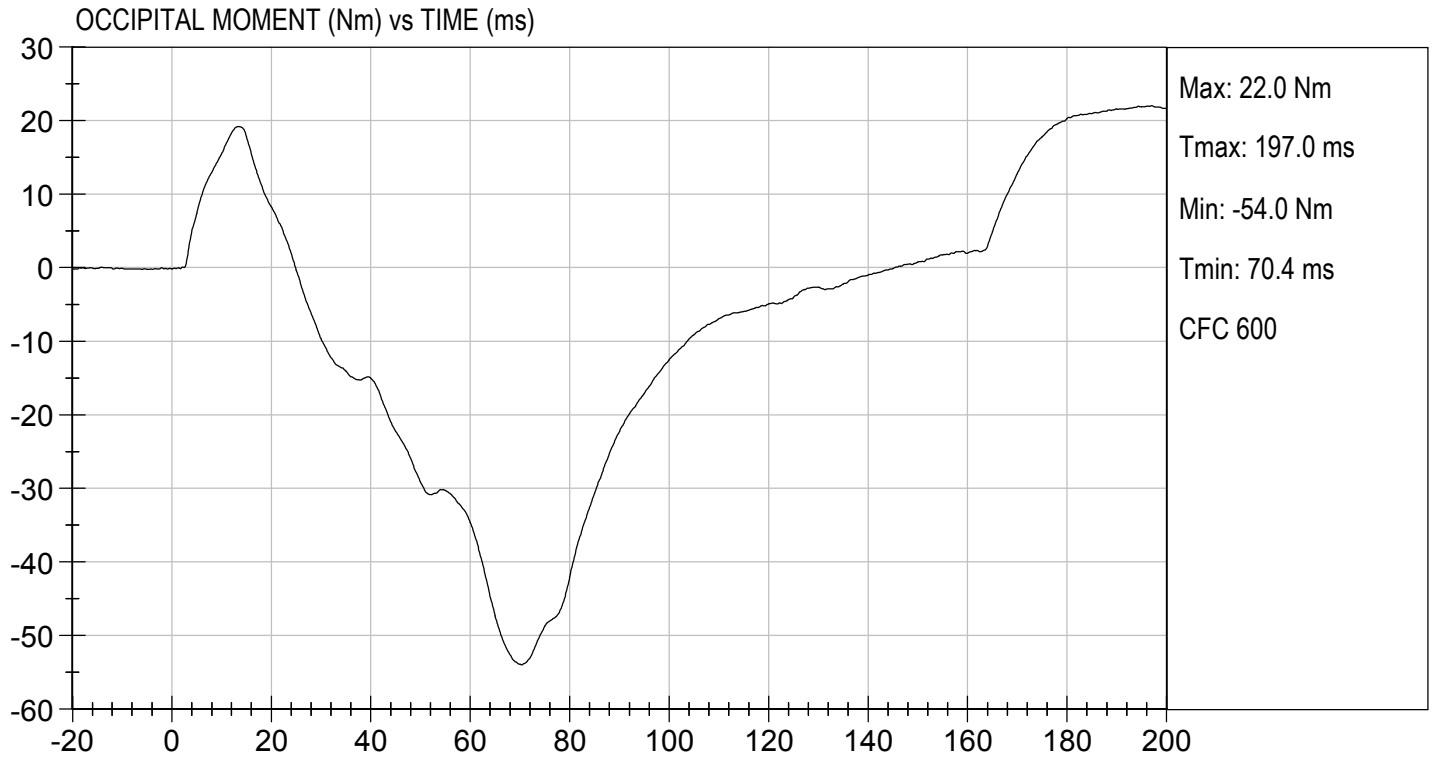

MGA RESEARCH CORPORATION
THORAX IMPACT
HYBRID III 5TH PERCENTILE

ATD Serial No: DH1659

Test I.D: D190834


Tested Parameter	Units	Specification	Result	Pass/Fail
Temperature	deg C	20.6 to 22.2	21.2	Pass
Relative Humidity	%	10 to 70	16	Pass
Probe Speed	m/s	6.59 to 6.83	6.77	Pass
Peak Deflection	mm	50 to 58	53	Pass
Peak Resistive Force w/in Deflection Corridor	N	3900 to 4400	4231	Pass
Internal Hysteresis	%	69 to 85	73	Pass
Peak Force 18 mm - 50 mm	N	<= 4600	4224	Pass
Overall Test Results				Pass

Danielle Redinlaugh
 Laboratory Technician

03/01/2019

Test Date

Robert Schaub
 Approved By

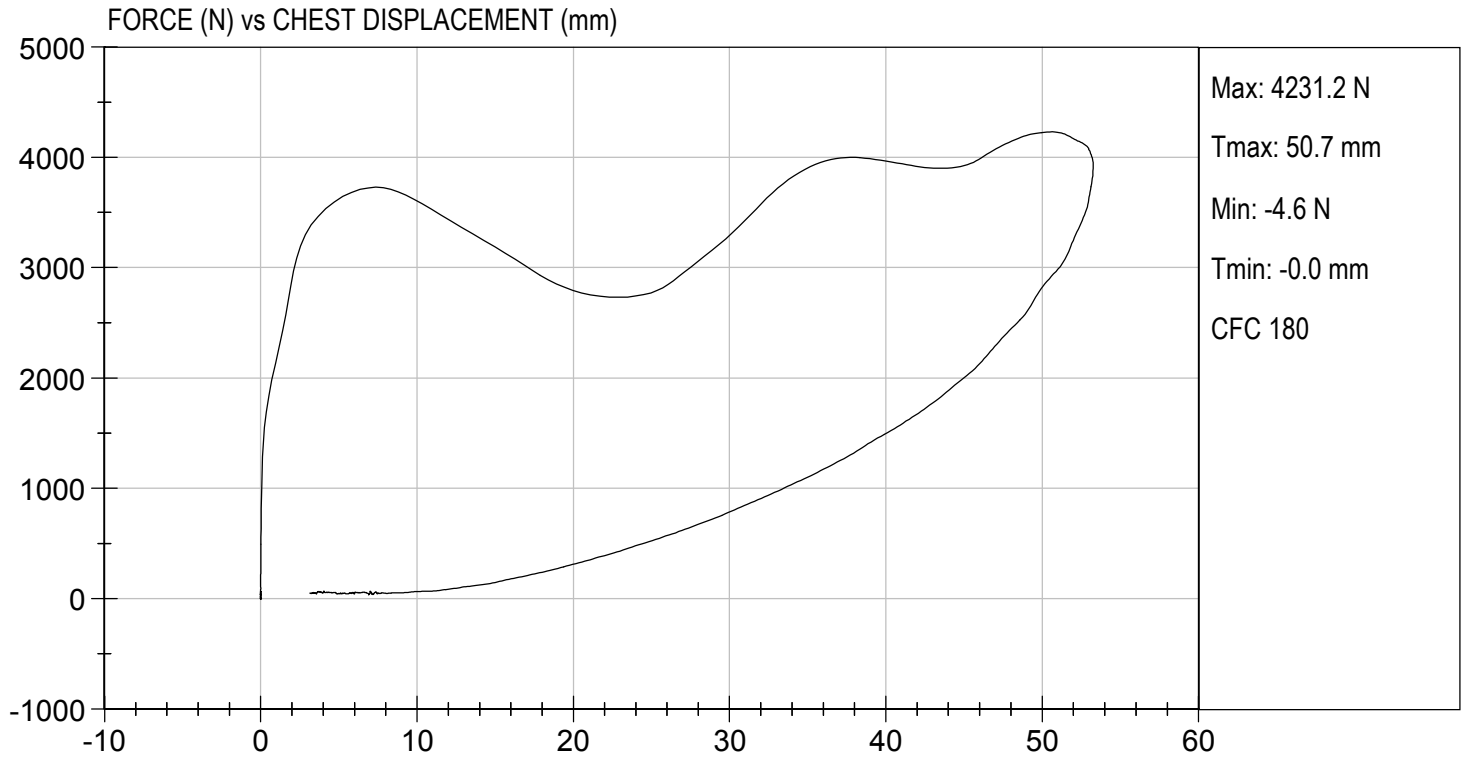

MGA RESEARCH CORPORATION
RIGHT KNEE IMPACT TEST
HYBRID III 5TH PERCENTILE

ATD Serial No: DH1659

Test I.D: D190835

Tested Parameter	Units	Specification	Result	Pass/Fail
Laboratory Temperature	deg C	18.9 to 25.6	21.0	Pass
Laboratory Relative Humidity	%	10 to 70	10	Pass
Probe Speed	m/s	2.07 to 2.13	2.12	Pass
Maximum Force	N	3450 to 4060	3780	Pass
Overall Test Results				Pass

Danielle Redinlaugh
Laboratory Technician


 03/04/2019
Test Date

Robert Schaub
Approved By



TEST DESC: RIGHT KNEE
VELOCITY: 6.94 ft/s, 2.12 m/s

TEST DATE: 03/04/2019
TEST #: D190835

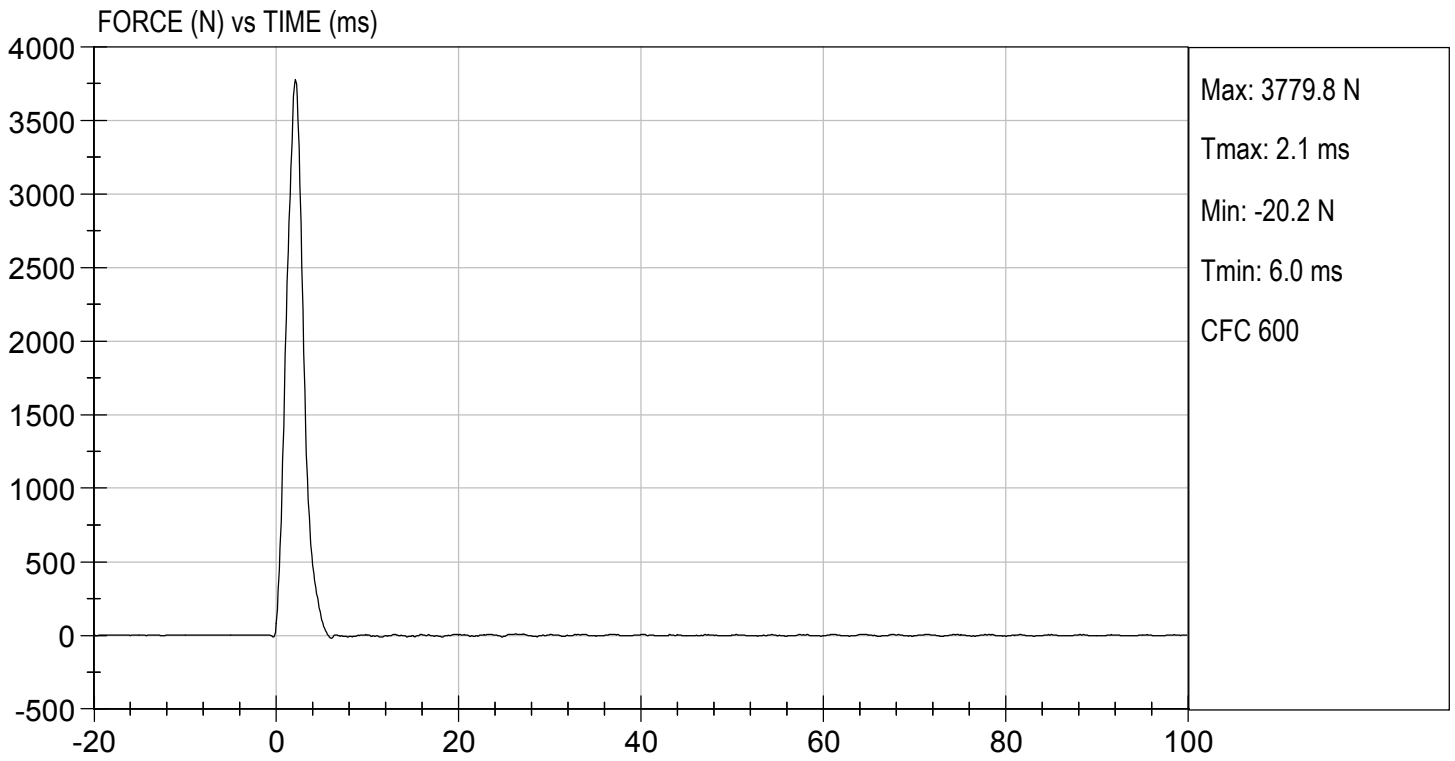

MGA RESEARCH CORPORATION
LEFT KNEE IMPACT TEST
HYBRID III 5TH PERCENTILE

ATD Serial No: DH1659

Test I.D: D190836

Tested Parameter	Units	Specification	Result	Pass/Fail
Laboratory Temperature	deg C	18.9 to 25.6	21.0	Pass
Laboratory Relative Humidity	%	10 to 70	10	Pass
Probe Speed	m/s	2.07 to 2.13	2.12	Pass
Maximum Force	N	3450 to 4060	3926	Pass
Overall Test Results				Pass

Danielle Redinlaugh
Laboratory Technician

03/04/2019


Test Date

Robert Schaub
Approved By



TEST DESC: LEFT KNEE
VELOCITY: 6.97 ft/s, 2.12 m/s

TEST DATE: 03/04/2019
TEST #: D190836

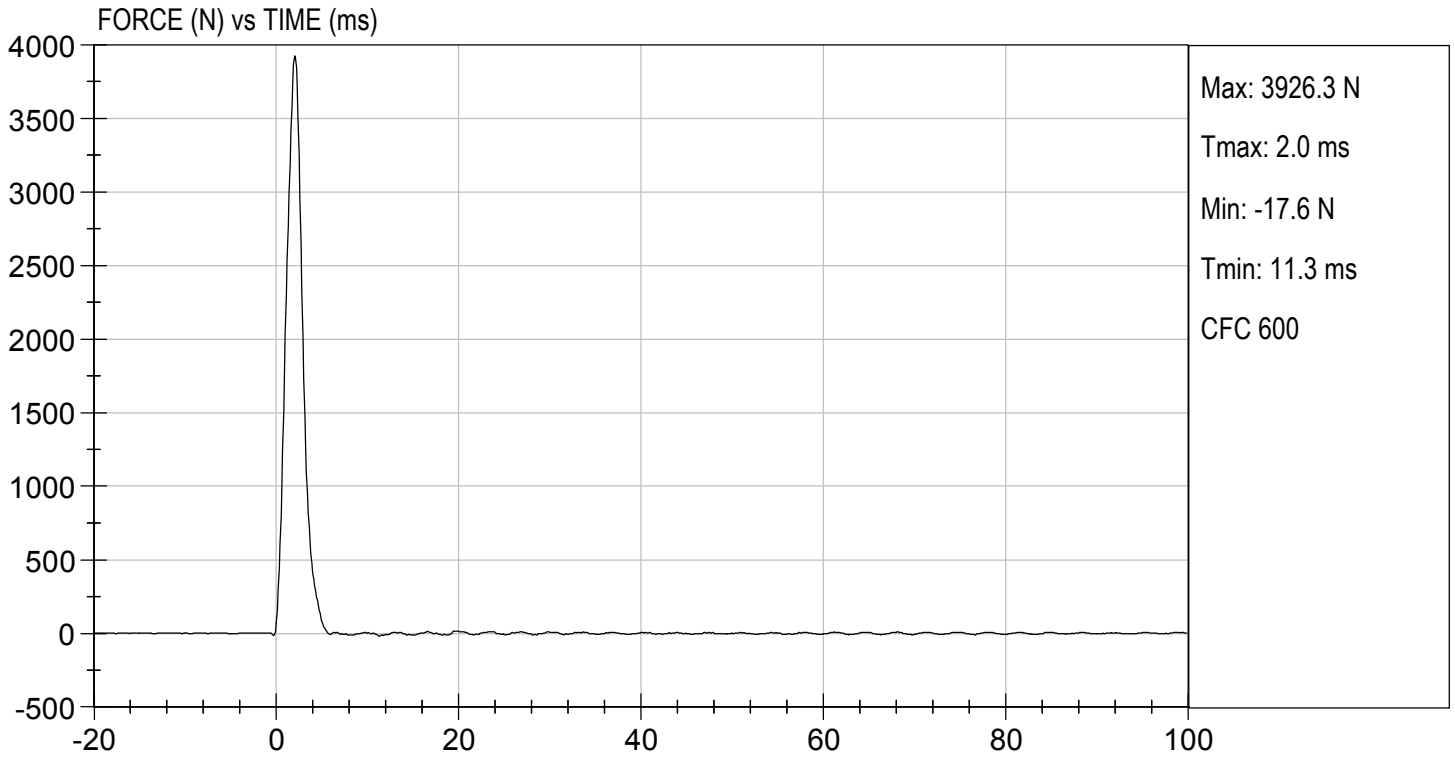

MGA RESEARCH CORPORATION
TORSO FLEXION TEST
HYBRID III 5TH PERCENTILE

ATD Serial No: DH1659



Test I.D: D190837

Tested Parameter	Units	Specification	Result	Pass/Fail
Laboratory Temperature	deg C	18.9 to 25.6	21.0	Pass
Laboratory Relative Humidity	%	10 to 70	10	Pass
Initial Angle	deg	0 to 20	17	Pass
Return Angle	deg	+/- 8	6	Pass
Force at 45 deg	N	320 to 390	354	Pass
Upper Torso Deflection Rate	deg/s	0.5 to 1.5	0.7	Pass
Overall Result				Pass

Danielle Redinlaugh
Laboratory Technician

03/04/2019
Test Date

Robert Schaub
Approved By

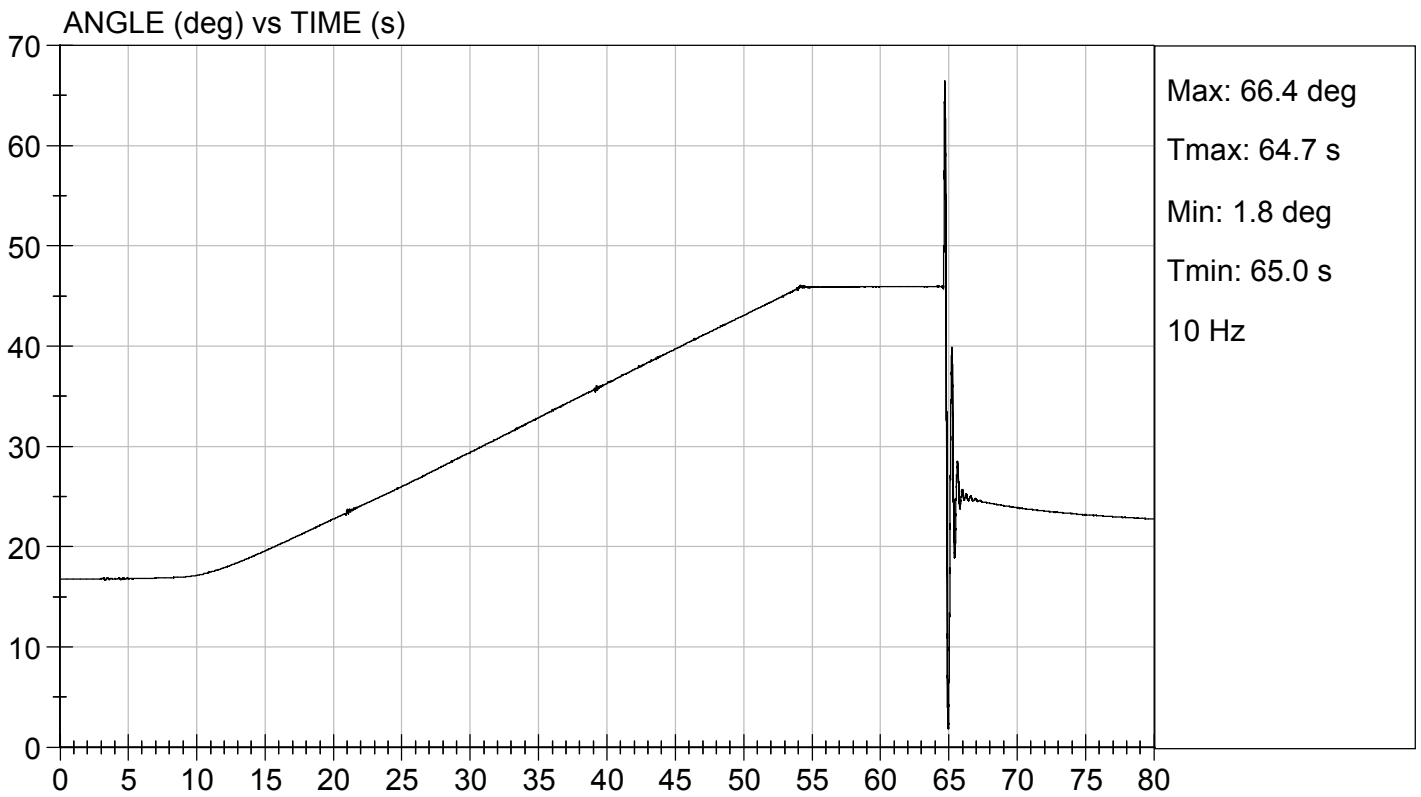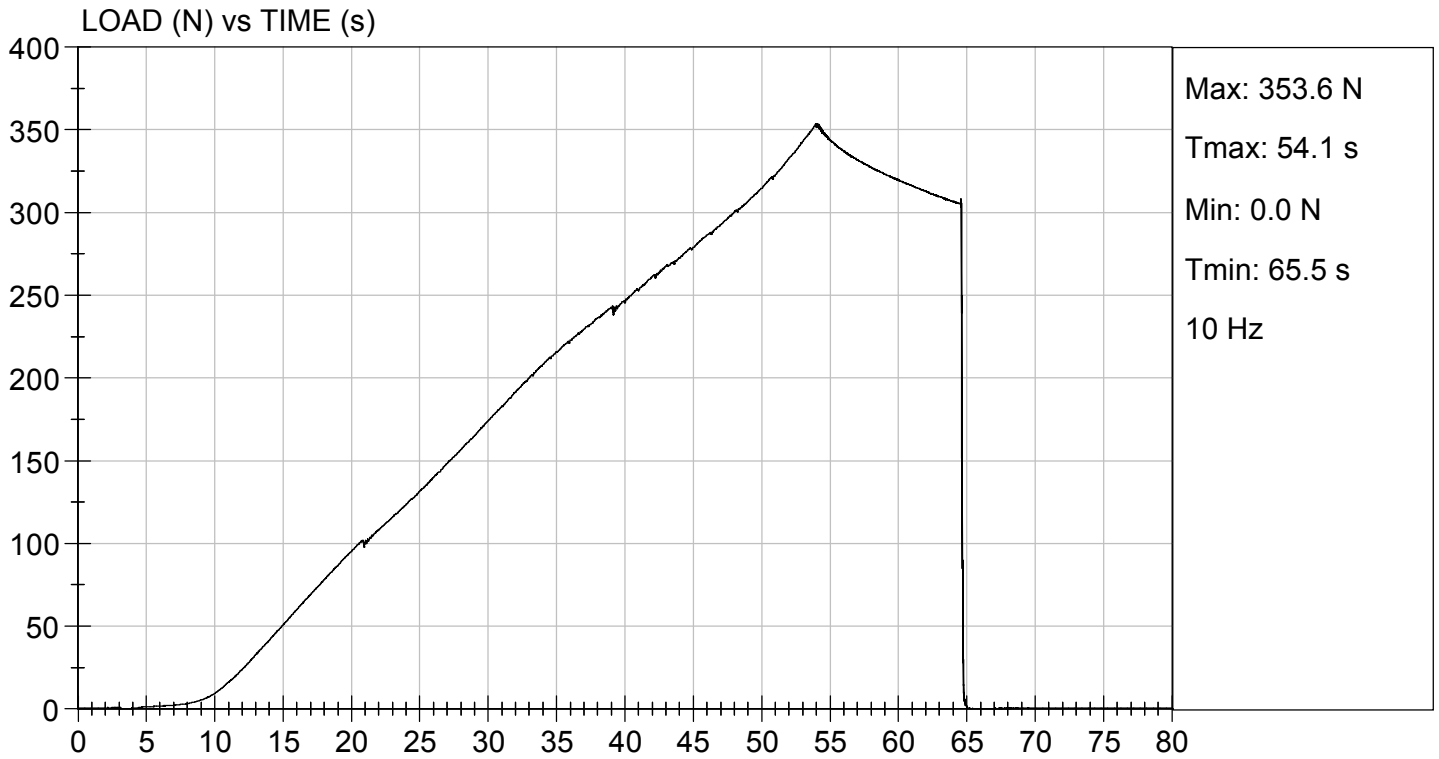

CALIBRATION TEST RESULTS

POST-TEST

HYBRID III 5TH PERCENTILE FEMALE - PASSENGER ATD

MGA RESEARCH CORPORATION
HEAD DROP TEST
HYBRID III 5TH PERCENTILE

ATD Serial No: DH1659

Test ID: D190961


Tested Parameter	Units	Specification	Result	Pass/Fail
Laboratory Temperature	deg C	18.9 to 25.6	21.4	Pass
Laboratory Relative Humidity	%	10 to 70	15	Pass
Peak Resultant Acceleration	G's	250 to 300	279	Pass
Peak Lateral Acceleration	G's	<= +/- 15.0	-3.1	Pass
Unimodal	N/A	Yes	Yes	Pass
Oscillations	N/A	within 10% of peak	Yes	Pass
Overall Test Results				Pass





Laboratory Technician



03/11/2019

Test Date



Approved By

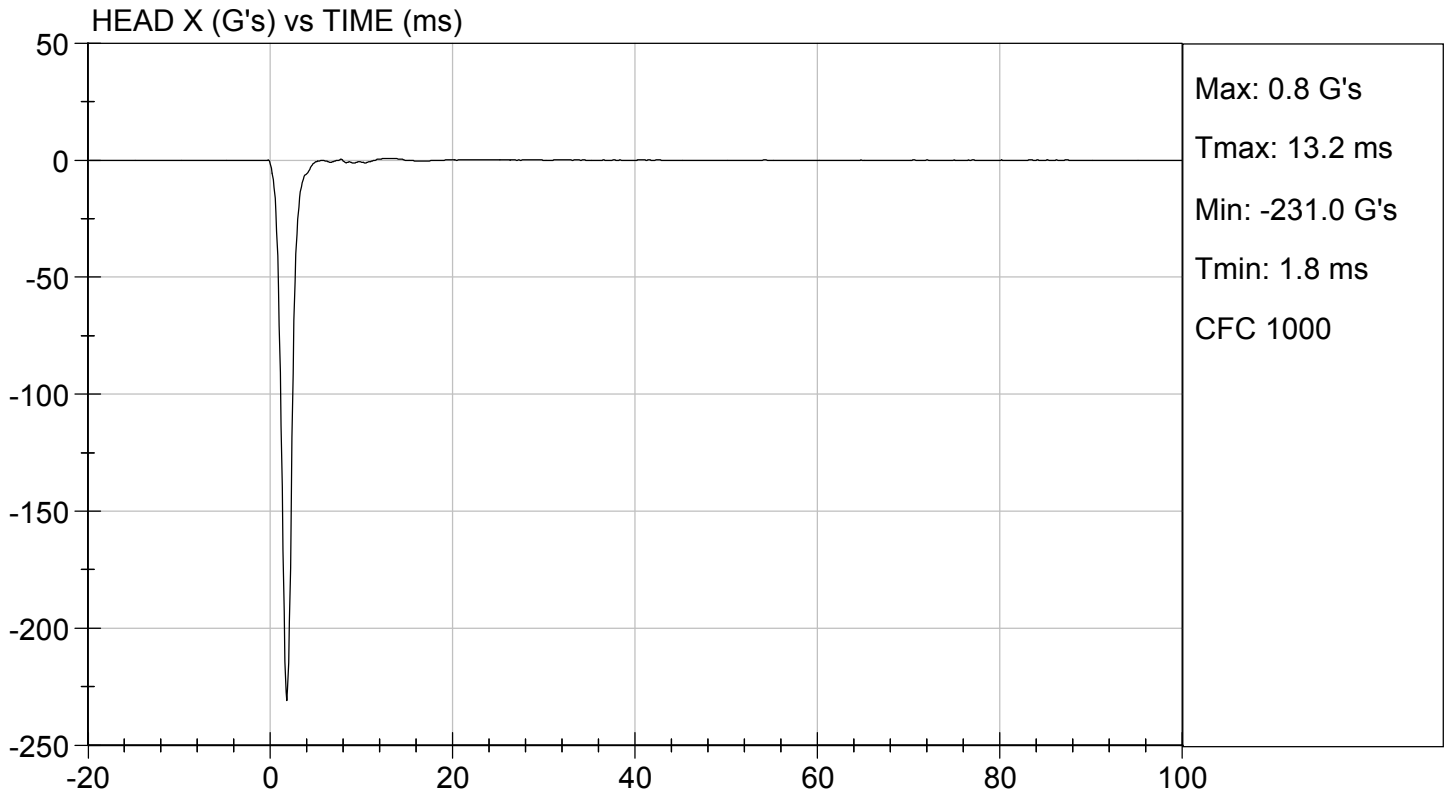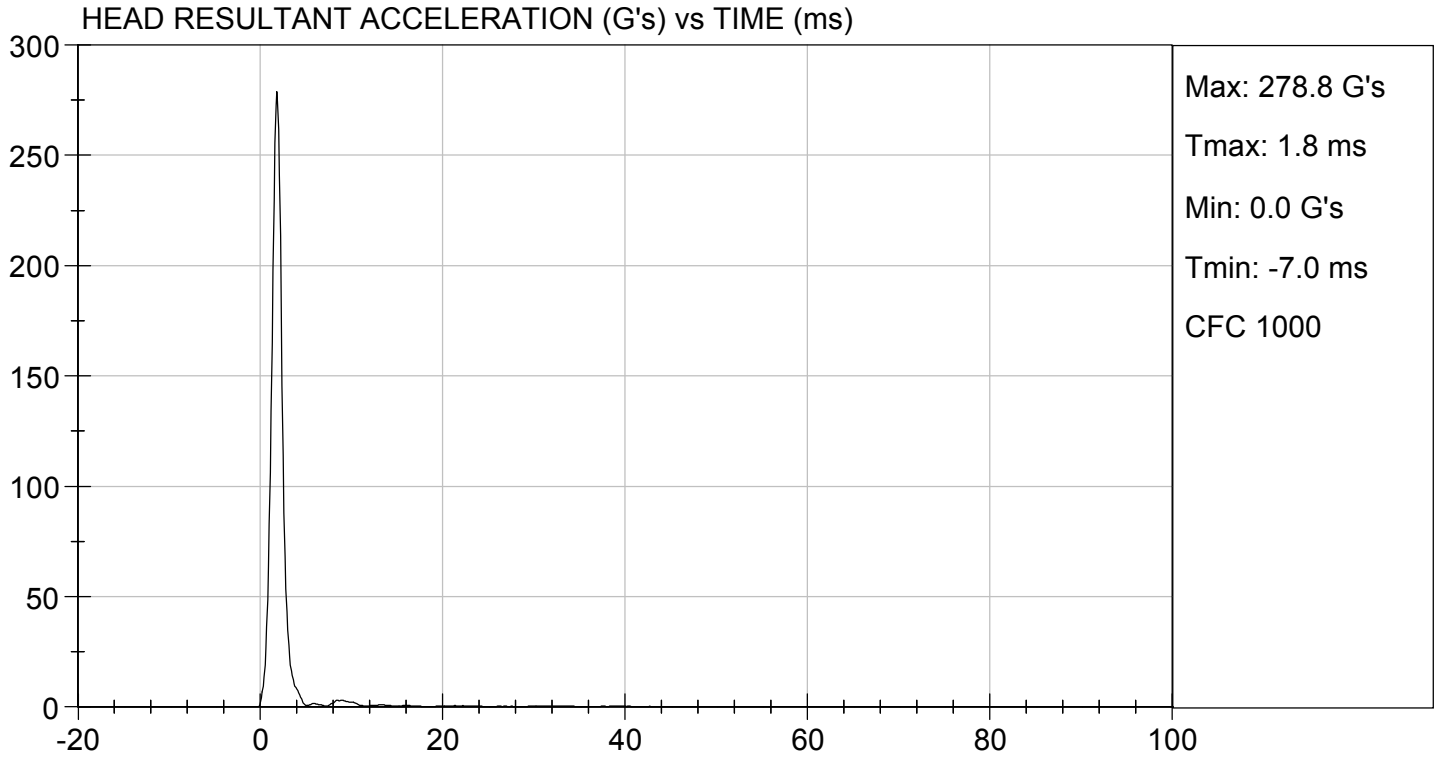

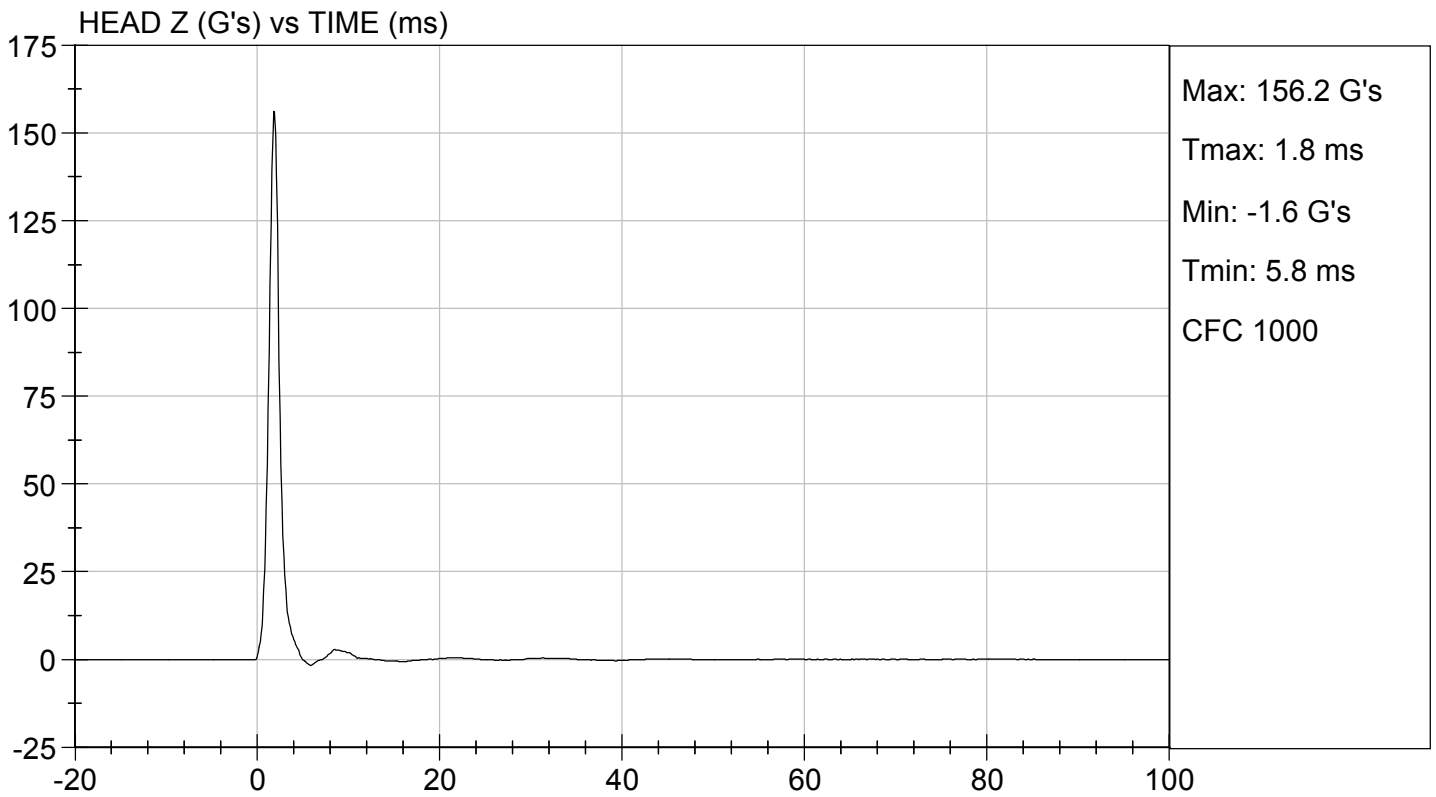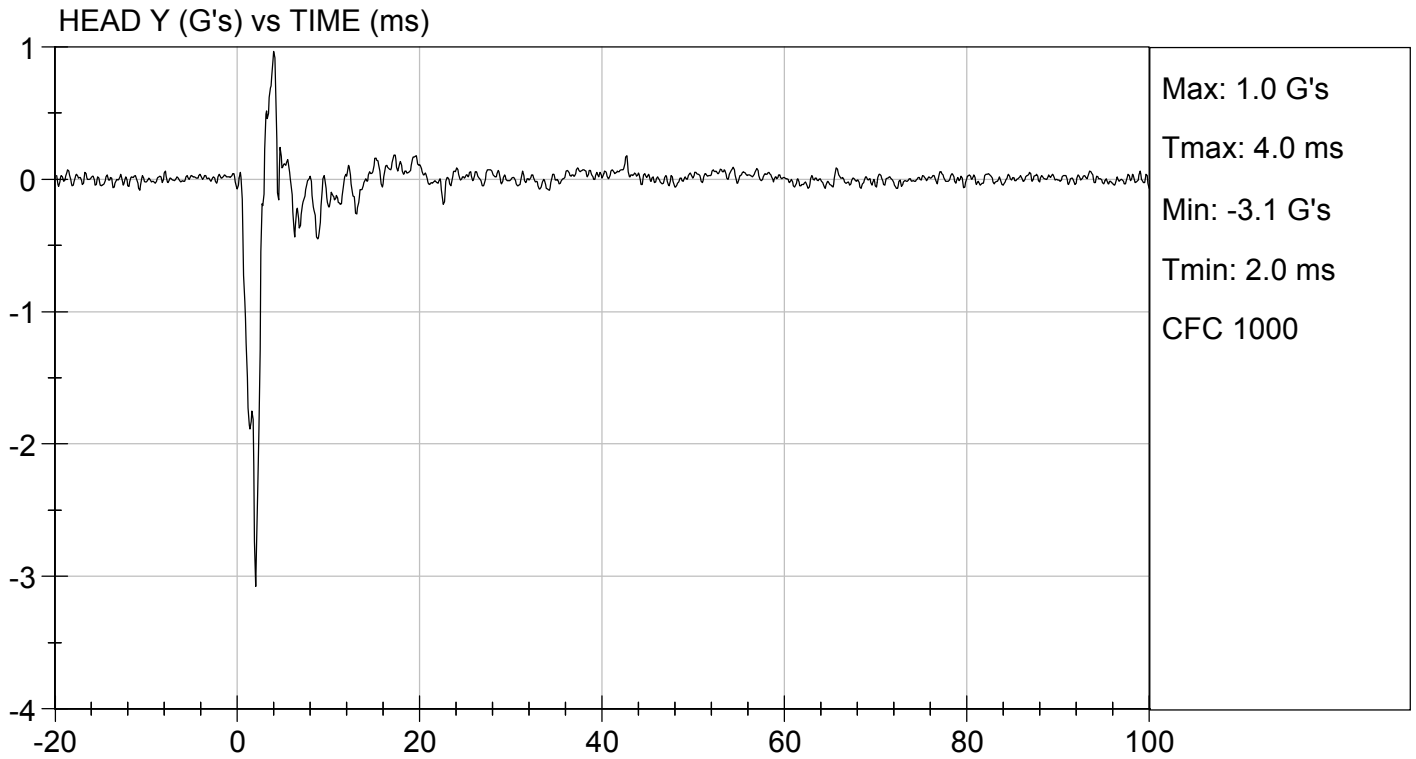

MGA RESEARCH CORPORATION

NECK FLEXION TEST

HYBRID III 5TH PERCENTILE

ATD Serial No: DH1659


Test I.D.: D190962

Tested Parameter		Units	Specification	Result	Pass/Fail
Laboratory Temperature		deg C	20.6 to 22.2	21.4	Pass
Laboratory Relative Humidity		%	10 to 70	17	Pass
Pendulum Speed		m/s	6.89 to 7.13	7.06	Pass
Pendulum Velocity	10 ms	m/s	2.1 to 2.5	2.5	Pass
	20 ms	m/s	4.0 to 5.0	4.9	Pass
	30 ms	m/s	5.8 to 7.0	6.9	Pass
D Plane Rotation	Max	deg	77 to 91	82	Pass
Occipital Condyle Moment within Rotation Corridor		Nm	69 to 83	72	Pass
Positive Moment Time Curve Decay to 10 Nm		ms	80 to 100	81	Pass
Overall Results					Pass





 Laboratory Technician

 03/11/2019
 Test Date




 Approved By

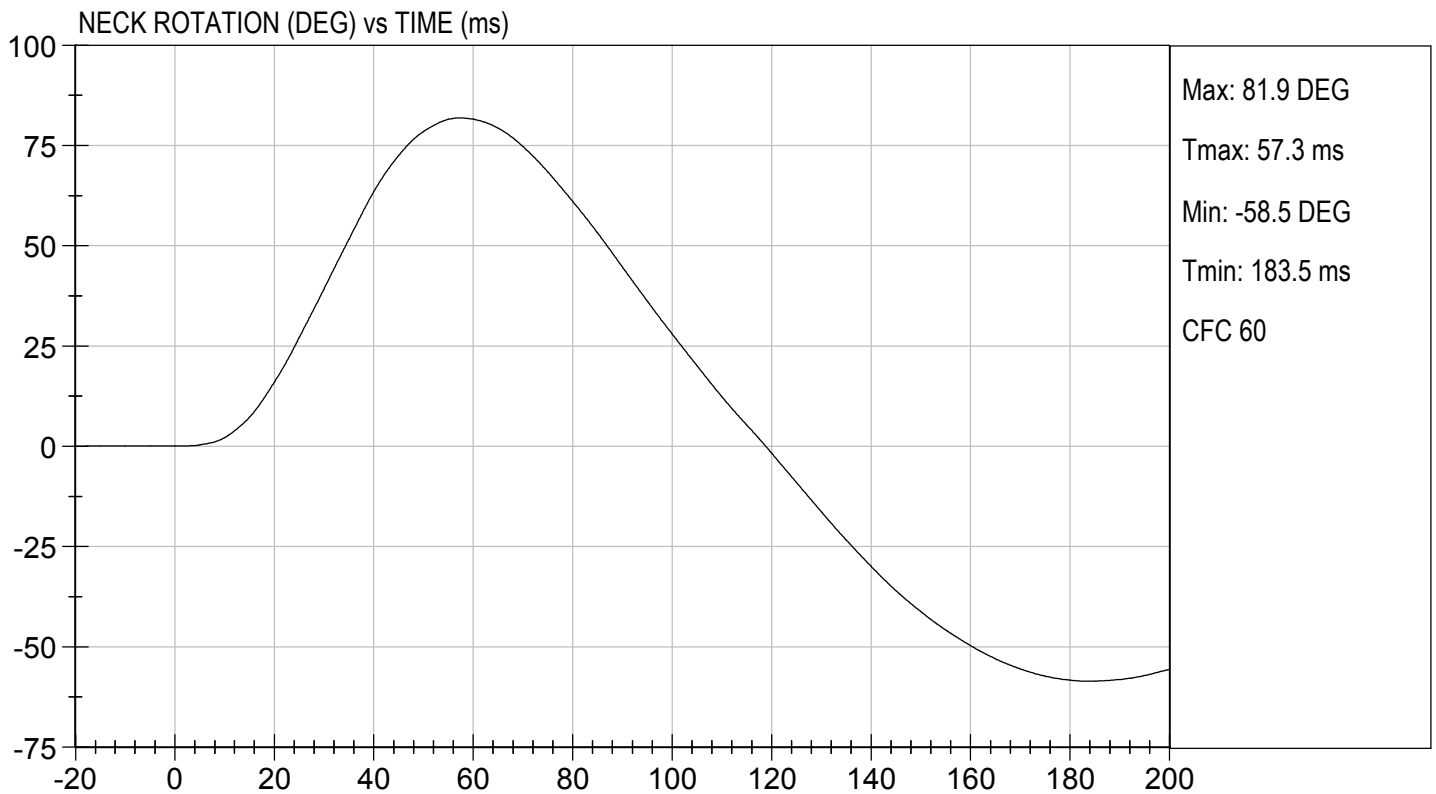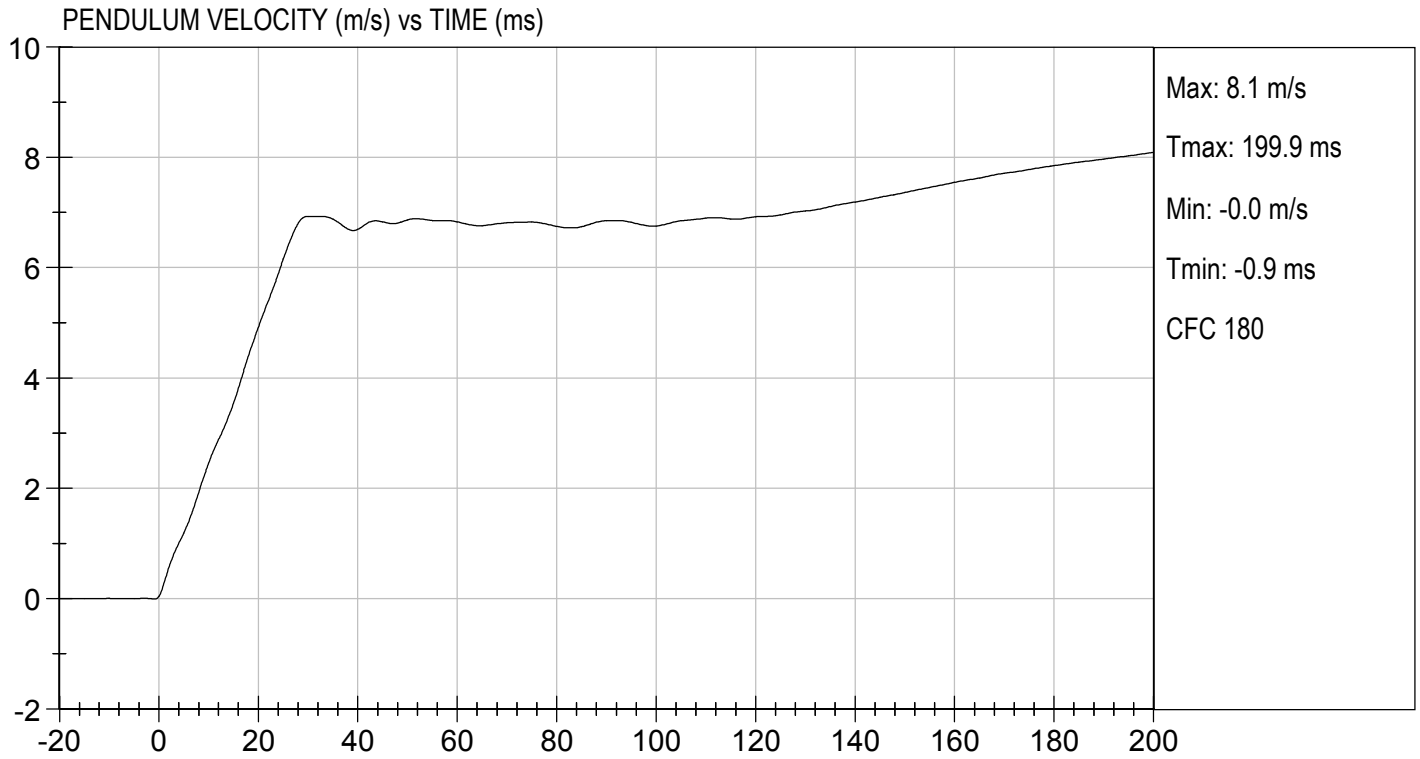



TEST DESC: NECK FLEXION
VELOCITY: 23.15 ft/s, 7.06 m/s

TEST DATE: 03/11/2019
TEST #: D190962

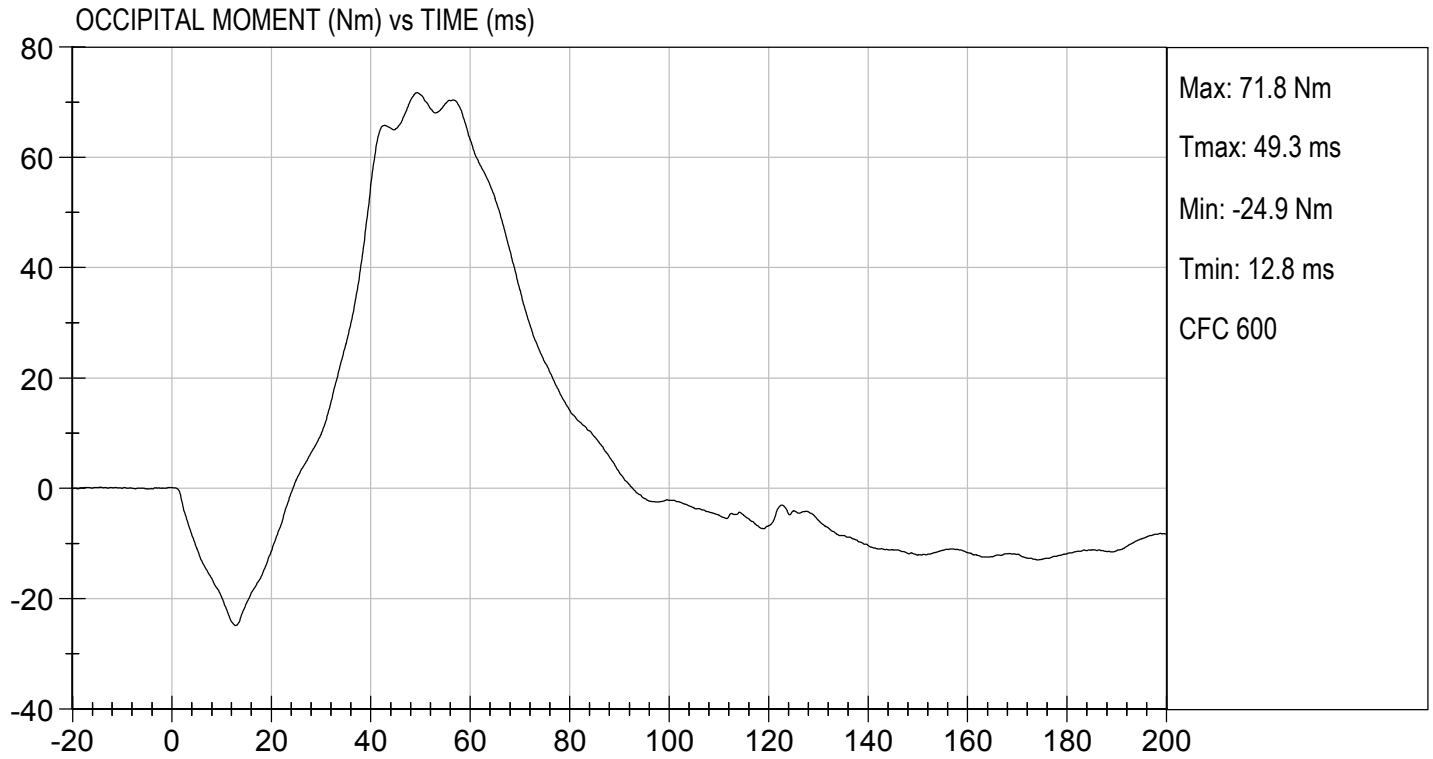

MGA RESEARCH CORPORATION
NECK EXTENSION TEST
HYBRID III 5TH PERCENTILE

ATD Serial No: DH1659

Test I.D: D190963


Tested Parameter		Units	Specification	Result	Pass/Fail
Laboratory Temperature		deg C	20.6 to 22.2	21.4	Pass
Laboratory Relative Humidity		%	10 to 70	25	Pass
Pendulum Speed		m/s	5.95 to 6.19	6.05	Pass
Pendulum Velocity	10 ms	m/s	1.5 to 1.9	1.7	Pass
	20 ms	m/s	3.1 to 3.9	3.6	Pass
	30 ms	m/s	4.6 to 5.6	5.3	Pass
D Plane Rotation	Max	deg	99 to 114	103	Pass
Occipital Condyle Moment within Rotation Corridor		Nm	-65 to -53	-54	Pass
Negative Moment Time Curve Decay to -10 Nm		ms	94 to 114	102	Pass
Overall Results					Pass





 Laboratory Technician


03/12/2019

 Test Date



 Approved By

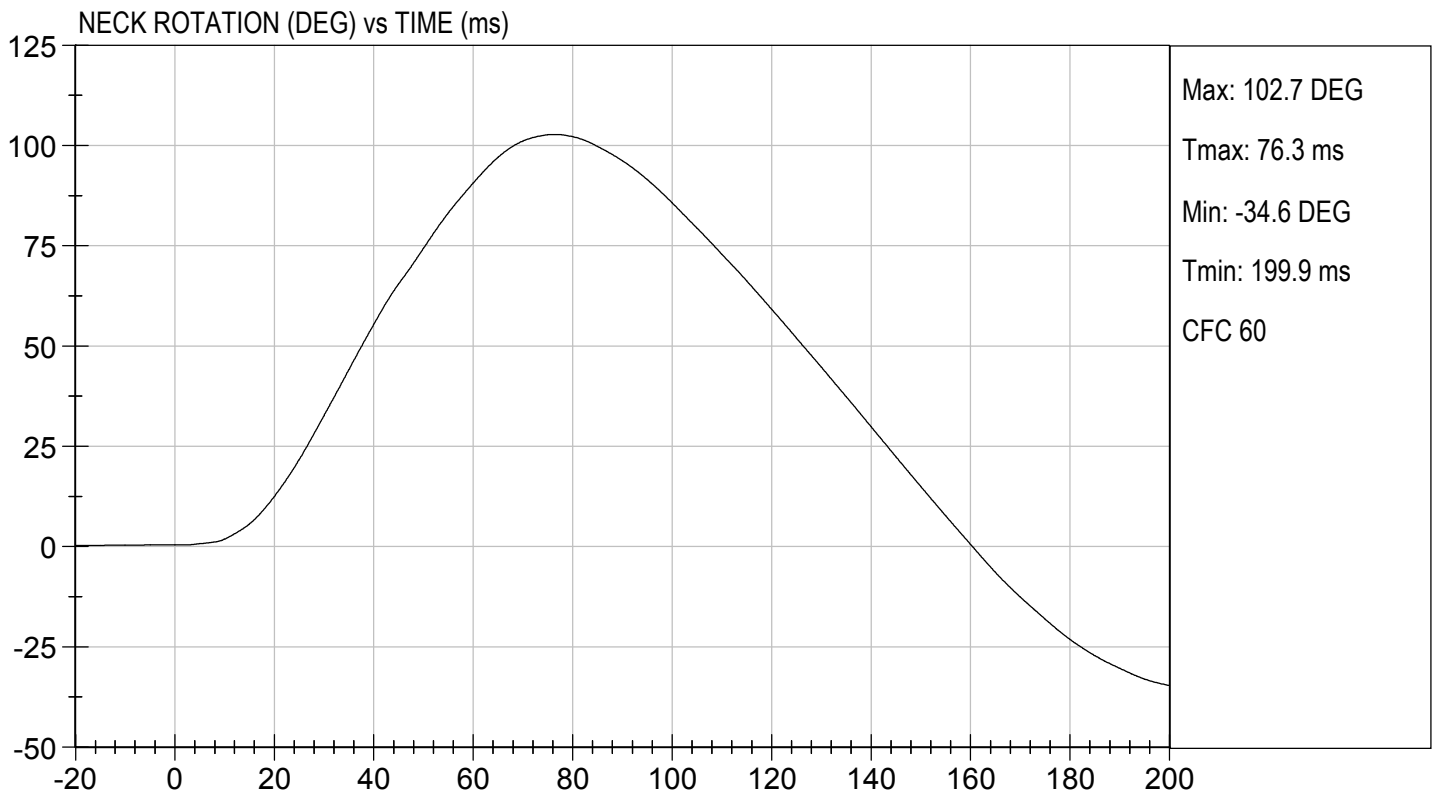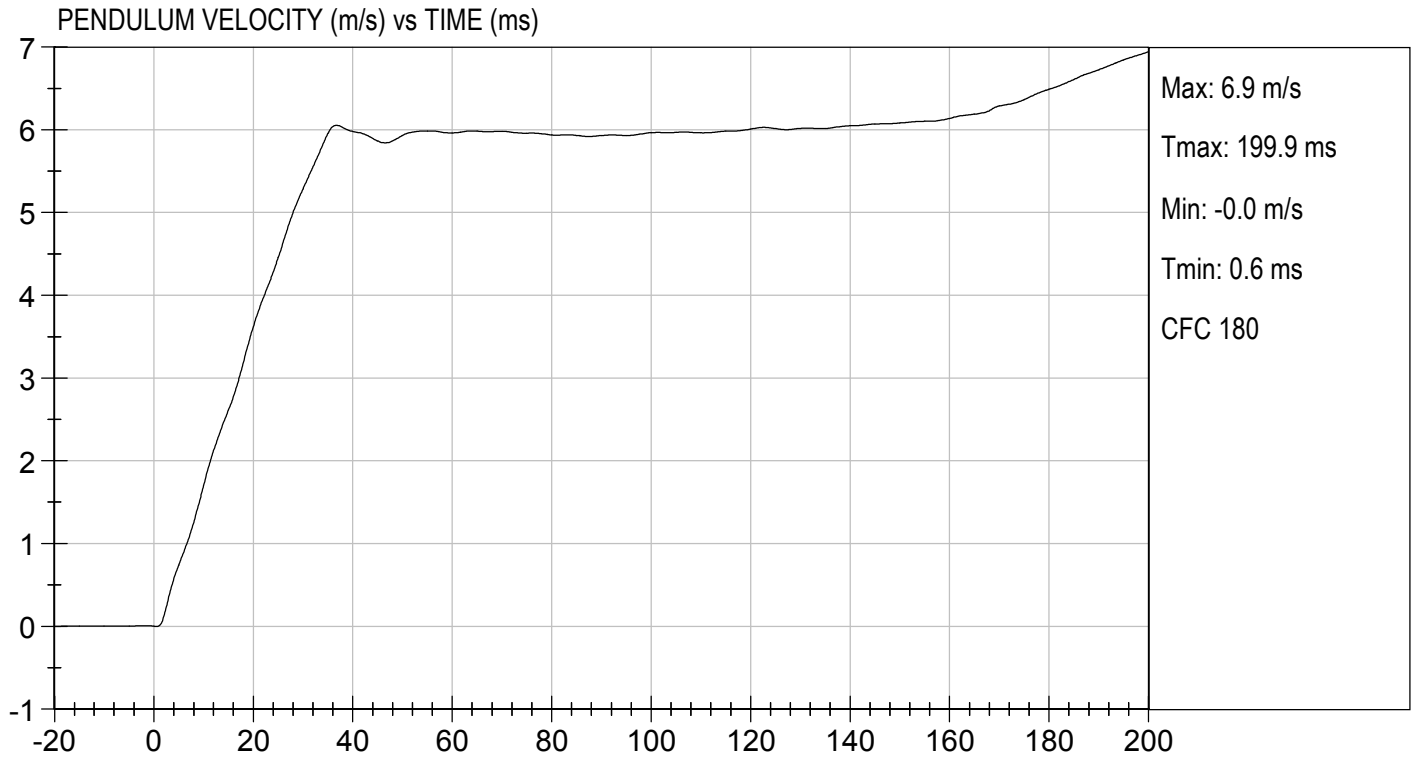

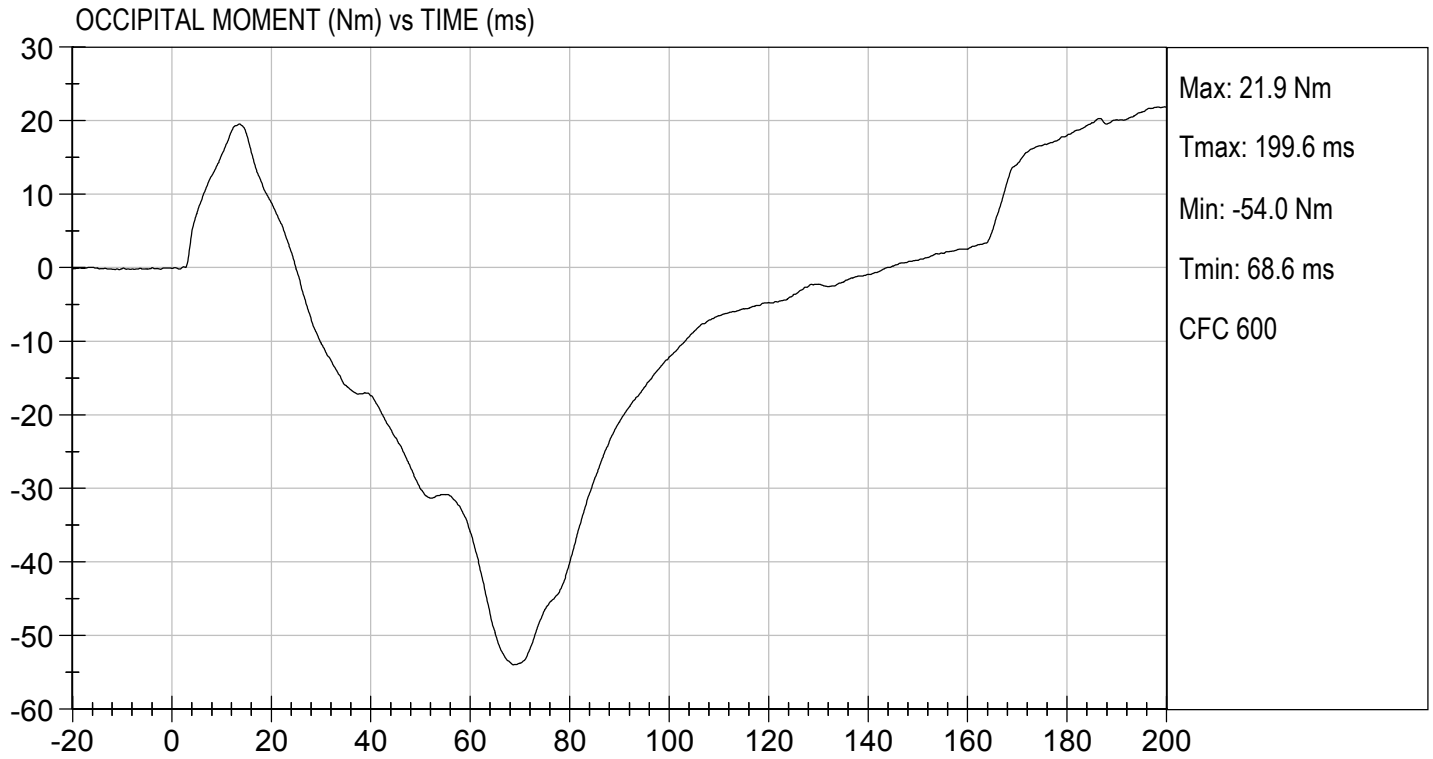

MGA RESEARCH CORPORATION
THORAX IMPACT
HYBRID III 5TH PERCENTILE

ATD Serial No: DH1659

Test I.D: D190964


Tested Parameter	Units	Specification	Result	Pass/Fail
Temperature	deg C	20.6 to 22.2	21.4	Pass
Relative Humidity	%	10 to 70	22	Pass
Probe Speed	m/s	6.59 to 6.83	6.77	Pass
Peak Deflection	mm	50 to 58	54	Pass
Peak Resistive Force w/in Deflection Corridor	N	3900 to 4400	4263	Pass
Internal Hysteresis	%	69 to 85	73	Pass
Peak Force 18 mm - 50 mm	N	<= 4600	4207	Pass
Overall Test Results				Pass




Laboratory Technician

03/12/2019

Test Date



Approved By

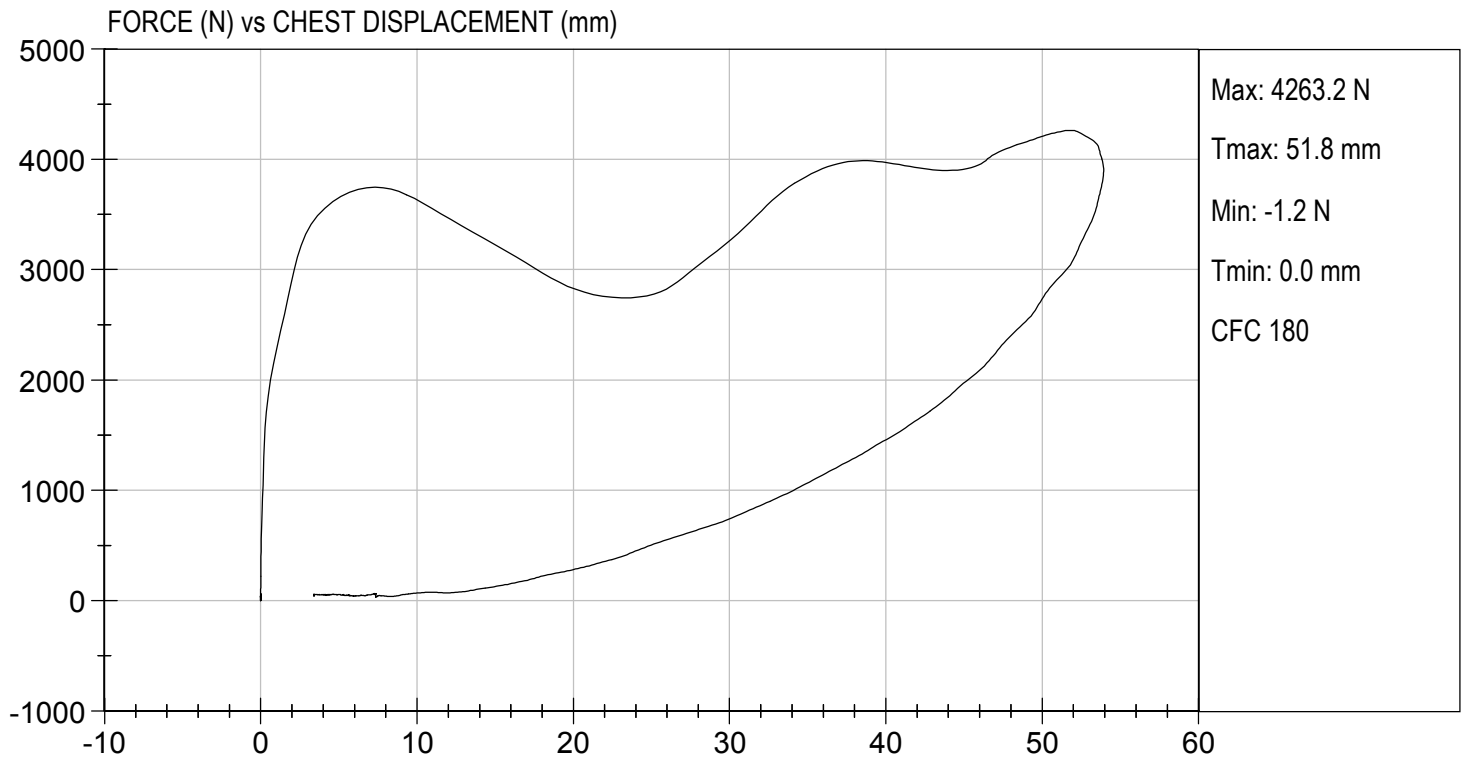

MGA RESEARCH CORPORATION
RIGHT KNEE IMPACT TEST
HYBRID III 5TH PERCENTILE

ATD Serial No: DH1659

Test I.D: D190965


Tested Parameter	Units	Specification	Result	Pass/Fail
Laboratory Temperature	deg C	18.9 to 25.6	21.4	Pass
Laboratory Relative Humidity	%	10 to 70	25	Pass
Probe Speed	m/s	2.07 to 2.13	2.10	Pass
Maximum Force	N	3450 to 4060	3804	Pass
Overall Test Results				Pass



Laboratory Technician

03/12/2019

Test Date




Approved By



TEST DESC: RIGHT KNEE
VELOCITY: 6.89 ft/s, 2.10 m/s

TEST DATE: 03/12/2019
TEST #: D190965

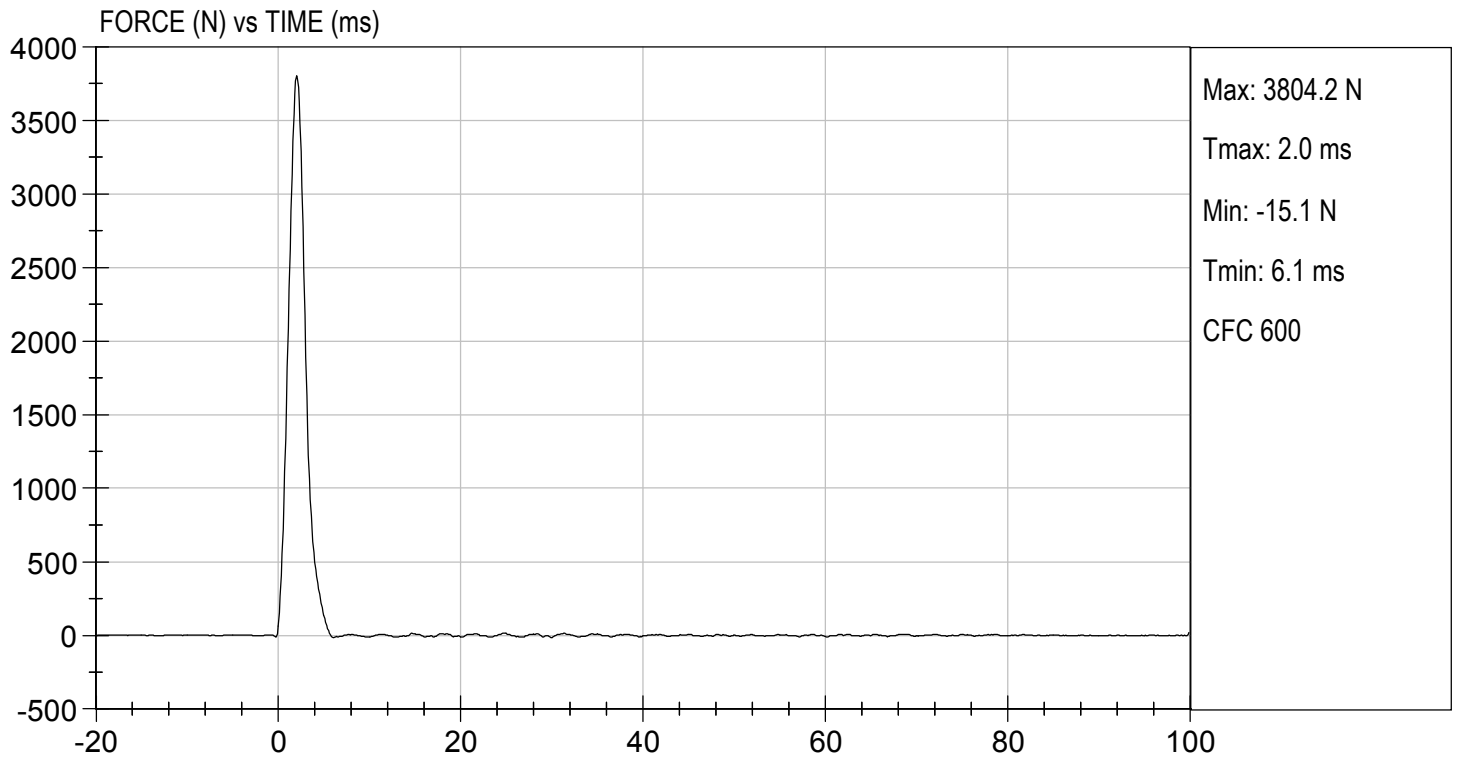

**MGA RESEARCH CORPORATION
LEFT KNEE IMPACT TEST
HYBRID III 5TH PERCENTILE**

ATD Serial No: DH1659

Test I.D: D190966


Tested Parameter	Units	Specification	Result	Pass/Fail
Laboratory Temperature	deg C	18.9 to 25.6	21.4	Pass
Laboratory Relative Humidity	%	10 to 70	25	Pass
Probe Speed	m/s	2.07 to 2.13	2.10	Pass
Maximum Force	N	3450 to 4060	3691	Pass
Overall Test Results				Pass



Laboratory Technician

03/12/2019

Test Date




Approved By



TEST DESC: LEFT KNEE
VELOCITY: 6.89 ft/s, 2.10 m/s

TEST DATE: 03/12/2019
TEST #: D190966

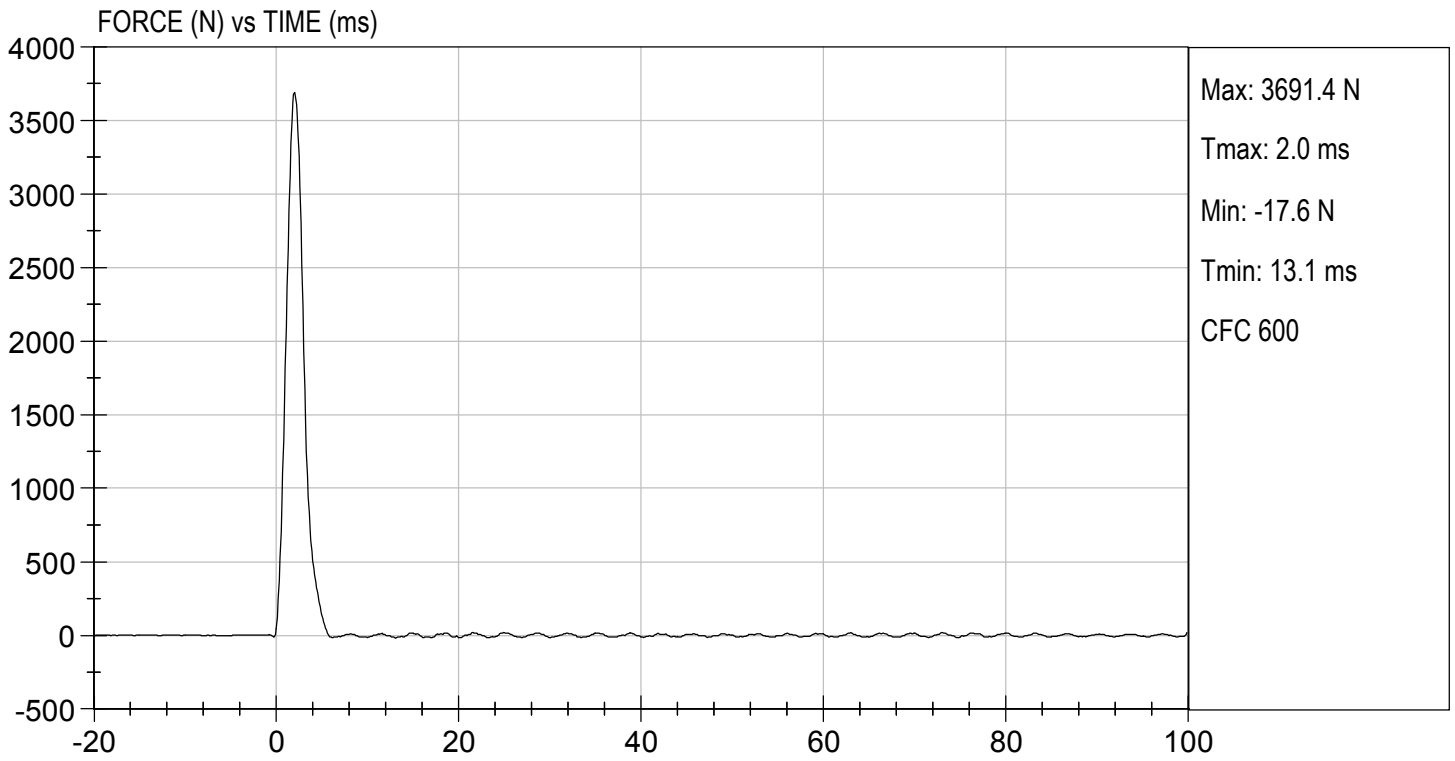

**MGA RESEARCH CORPORATION
 TORSO FLEXION TEST
 HYBRID III 5TH PERCENTILE**

ATD Serial No: DH1659

Test I.D: D190967


Tested Parameter	Units	Specification	Result	Pass/Fail
Laboratory Temperature	deg C	18.9 to 25.6	21.4	Pass
Laboratory Relative Humidity	%	10 to 70	25	Pass
Initial Angle	deg	0 to 20	15	Pass
Return Angle	deg	+/- 8	6	Pass
Force at 45 deg	N	320 to 390	364	Pass
Upper Torso Deflection Rate	deg/s	0.5 to 1.5	0.9	Pass
Overall Result				Pass



 Laboratory Technician

03/12/2019

 Test Date



 Approved By

