

**REPORT NUMBER: SPNCAP-CAL-19-007**

**NEW CAR ASSESSMENT PROGRAM (NCAP)  
SIDE IMPACT POLE TEST**

**General Motors LLC  
2019 Chevrolet Cruze  
Four Door Sedan**

**NHTSA No: M20190115**

**PREPARED BY:  
CALSPAN CORPORATION  
P.O. BOX 400  
BUFFALO, NEW YORK 14225**



**September 5, 2019**


**FINAL REPORT**

**PREPARED FOR:  
U.S. DEPARTMENT OF TRANSPORTATION  
NATIONAL HIGHWAY TRAFFIC SAFETY ADMINISTRATION  
OFFICE OF CRASHWORTHINESS STANDARDS  
MAIL CODE: NRM-110  
1200 NEW JERSEY AVE SE, ROOM W43-410  
WASHINGTON, D.C. 20590**

This final test report was prepared for the U.S. Department of Transportation, National Highway Traffic Safety Administration, in response to Contract Number DTNH22-14-D-00352.

This publication is distributed by the U.S. Department of Transportation, National Highway Traffic Safety Administration, in the interest of information exchange. The opinions, findings and conclusions expressed in this publication are those of the author(s) and not necessarily those of the Department of Transportation or the National Highway Traffic Safety Administration. The United States Government assumes no liability for its contents or use thereof.

If trade or manufacturers' names or products are mentioned it is only because they are considered essential to the object of the publication and should not be construed as an endorsement. The United States Government does not endorse products or manufacturers.

Prepared by:   
Vince Paolini, Senior Test Engineer

Date: September 5, 2019

Approved by:   
Vanessa Hansen, Operations Manager

Date: September 5, 2019

**FINAL REPORT ACCEPTANCE BY OCWS:**

\_\_\_\_\_  
Division Chief, New Car Assessment Program  
NHTSA, Office of Crashworthiness Standards

Date: \_\_\_\_\_

\_\_\_\_\_  
COTR, New Car Assessment Program  
NHTSA, Office of Crashworthiness Standards

Date: \_\_\_\_\_

**TECHNICAL REPORT DOCUMENTATION PAGE**

<b>1. Report No.</b> SPNCAP-CAL-19-007	<b>2. Government Accession No.</b>	<b>3. Recipient's Catalog No.</b>																												
<b>4. Title and Subtitle</b> Final Report of New Car Assessment Program Side Impact Pole Testing of a 2019 Chevrolet Cruze four door sedan NHTSA No.: M20190115		<b>5. Report Date</b> September 5, 2019																												
		<b>6. Performing Organization Code</b> CAL																												
<b>7. Author(s)</b> Vince Paolini, Senior Test Engineer Vanessa Hansen, Operations Manager		<b>8. Performing Organization Report No.</b> CAL-DOT-2019-007																												
<b>9. Performing Organization Name and Address</b> Calspan Corporation Transportation Test Operation P.O. Box 400 Buffalo, New York 14225		<b>10. Work Unit No.</b>																												
		<b>11. Contract or Grant No.</b> DTNH22-14-D-00352																												
<b>12. Sponsoring Agency Name and Address</b> U.S. Department of Transportation National Highway Traffic Safety Administration Office of Crashworthiness Standards (NRM-110) 1200 New Jersey Ave., SE, Room W43-410 Washington, D.C. 20590		<b>13. Type of Report and Period Covered:</b> Final Test Report, May 29, 2019 - September 5, 2019																												
		<b>14. Sponsoring Agency Code</b> NRM-110																												
<b>15. Supplementary Notes</b>																														
<b>16. Abstract</b> A 32.20 km/h (20 mph), 75° oblique impact Side NCAP Test was conducted on the subject 2019 Chevrolet Cruze four door sedan in accordance with the specifications of the Office of Crashworthiness Standards Side NCAP Pole Laboratory Test Procedure for the generation of consumer information on vehicle side pole crash protection. This test was conducted at Calspan Corporation's Transportation Test Operations facility in Buffalo, New York on May 29, 2019.  The impact velocity of the vehicle was 32.36 km/h, and the ambient temperature at the struck (driver's) side of the target vehicle was 21°C. The target vehicle's maximum post-test static crush was 326 mm located at level 3. The test vehicle's occupant performance data is as follows:																														
<table border="1"> <thead> <tr> <th rowspan="2">Measurement Description</th> <th colspan="3">Driver ATD (SID-IIs) (Serial No. DG8012)</th> </tr> <tr> <th>Units</th> <th>Threshold</th> <th>Result</th> </tr> </thead> <tbody> <tr> <td>Head Injury Criteria (HIC<sub>36</sub>)</td> <td></td> <td>1000</td> <td>315.482</td> </tr> <tr> <td>Resultant Lower Spine Acceleration</td> <td>G</td> <td>82</td> <td>36.038</td> </tr> <tr> <td>Total Pelvic Force (sum of acetabular and iliac forces)</td> <td>N</td> <td>5525</td> <td>2227.899</td> </tr> <tr> <td>Maximum Thoracic Rib Deflection</td> <td>mm</td> <td>38</td> <td>19.347</td> </tr> <tr> <td>Maximum Abdomen Rib Deflection</td> <td>mm</td> <td>45</td> <td>19.169</td> </tr> </tbody> </table>				Measurement Description	Driver ATD (SID-IIs) (Serial No. DG8012)			Units	Threshold	Result	Head Injury Criteria (HIC <sub>36</sub> )		1000	315.482	Resultant Lower Spine Acceleration	G	82	36.038	Total Pelvic Force (sum of acetabular and iliac forces)	N	5525	2227.899	Maximum Thoracic Rib Deflection	mm	38	19.347	Maximum Abdomen Rib Deflection	mm	45	19.169
Measurement Description	Driver ATD (SID-IIs) (Serial No. DG8012)																													
	Units	Threshold	Result																											
Head Injury Criteria (HIC <sub>36</sub> )		1000	315.482																											
Resultant Lower Spine Acceleration	G	82	36.038																											
Total Pelvic Force (sum of acetabular and iliac forces)	N	5525	2227.899																											
Maximum Thoracic Rib Deflection	mm	38	19.347																											
Maximum Abdomen Rib Deflection	mm	45	19.169																											
The two doors on the struck side of the vehicle did not separate from the body at the hinges or latches and the opposite doors did not open during the side impact event.																														
<b>17. Key Words</b> New Car Assessment Program (NCAP) Side Impact Pole Part 572V SID-IIs		<b>18. Distribution Statement</b> Copies of this report are available from: National Highway Traffic Safety Administration Technical Information Services Division, NPO-411 1200 New Jersey Ave. SE Washington, D.C. 20590																												
<b>19. Security Class. (of this report)</b> UNCLASSIFIED	<b>20. Security Class. (of this page)</b> UNCLASSIFIED	<b>21. No. of Pages</b> 123	<b>22. Price</b>																											

## TABLE OF CONTENTS

<u>Section</u>		<u>Page</u>
1	Test Purpose and Procedure	1-1
2	Summary of Test Results	2-1
3	Occupant and Vehicle Information	3-1
 <u>Data Sheet</u>		 <u>Page</u>
1	General Test and Vehicle Parameter Data	3-2
2	Seat, Seat Belt, Steering Wheel Adjustment and Fuel Systems Data	3-6
3	Dummy Longitudinal Clearance Dimensions	3-9
4	Dummy Lateral Clearance Dimensions	3-10
5	Camera and instrumentation Data	3-11
6	Vehicle Accelerometer Data	3-12
7	Rigid Pole Load Cell Data	3-13
8	Post-Test Observations	3-14
9	Test Vehicle Profile Measurements	3-16
10	Test Vehicle Exterior Crush Measurements	3-17
11	Vehicle Damage Profile Distances	3-20
12	FMVSS No. 301 Static Rollover Results	3-21
13	Dummy / Vehicle Temperature and Humidity Stabilization Data	3-22
 <u>Appendix</u>		 <u>Page</u>
A	Photographs	A-1
B	Vehicle and Dummy Response Data Plots	B-1
C	Dummy Configuration and Performance Verification Data	C-1
D	Test Equipment and Instrumentation Calibration Data	D-1



## **SECTION 1**

### **TEST PURPOSE AND PROCEDURE**

This side impact test was conducted as part of the MY 2019 New Car Assessment Program Side Impact Test Program, sponsored by the National Highway Traffic Safety Administration (NHTSA), under Contract No. DTNH22-14-D-00352. The purpose of this test is to generate comparative side impact performance in a 2019 Chevrolet Cruze four door sedan. The side impact test was conducted in accordance with the Office of Crashworthiness Standard's Side NCAP Pole Laboratory Test Procedure, dated October 2015.

## SECTION 2

### SUMMARY OF TEST RESULTS

A rigid pole side impact test was conducted on a 2019 Chevrolet Cruze four door sedan. The subject vehicle was towed into the rigid pole at an angle of 75° and a velocity of 32.36 km/h. The test was conducted by Calspan Corporation's Transportation Test Operations facility in Buffalo, New York on May 29, 2019. Pre-test and post-test photographs of the test vehicle and side impact dummy (SID-IIs) are included in Appendix A of this report.

One Part 572V (SID-IIs) dummy was placed in the driver designated seating position according to instructions specified in the OCWS Side NCAP Pole Laboratory Test Procedure, dated October 2015. Camera locations and other pertinent camera information are included on page 3-11 in this report.

The Part 572V (SID-IIs) dummy was instrumented accordingly:

Head CG tri-axial accelerometers

Thorax upper, middle, and lower rib displacement potentiometers

Abdomen upper and lower rib displacement potentiometers

Lower spine tri-axial accelerometers

Iliac load cell

Acetabulum load cell

Appendix B contains the dummy response data. Dummy configuration and performance verification data can be found in Appendix C of this report. Appendix D identifies all serial numbers, manufacturers, and calibration dates for test equipment, dummy sensors, potentiometers, and load cells used to collect data during the test.

Injury readings for the SID-IIs dummy were recorded as follows:

#### INJURY READINGS

Measurement Description	Driver ATD (SID-IIs)		
	Units	IARV	Result
Head Injury Criteria (HIC <sub>36</sub> )		1000	315.482
Resultant Lower Spine Acceleration	g	82	36.038
Total Pelvic Force (sum of acetabular and iliac forces)	N	5525	2227.899
Maximum Thoracic Rib Deflection	mm	38*	19.347
Maximum Abdominal Rib Deflection	mm	45*	19.169

\*Proposed IARV

Supplemental restraint information was recorded as follows:

**SUPPLEMENTAL RESTRAINT INFORMATION**

Restraint Type	Left Front (Driver) Occupant Location 1		Left Rear (Passenger) Occupant Location 4	
	Mounted	Deployed	Mounted	Deployed
Frontal Airbag	Yes	No		
Knee Airbag	Yes	No		
Side Airbag 1 - Curtain	Yes	Yes	Yes	Yes
Side Airbag 2 – Torso/Pelvis	Yes	Yes	Yes	Yes
Seat Belt Pretensioner	Yes	Yes	No	N/A
Seat Belt Load Limiter	Yes	Yes	No	N/A
Other				

**GENERAL COMMENTS:**

1. P1 serial number – DG8012

**Data Anomalies:**

- Left Sill A-Pillar Y Acceleration, Exceeded calibration range at 56.4 ms
- Left Sill B-Pillar Y Acceleration, Exceeded calibration range at 67.4ms & 80.1ms

**SECTION 3**  
**OCCUPANT AND VEHICLE INFORMATION**

This section contains information reporting for the following Data Sheets:

Data Sheet No. 1 – General Test and Vehicle Parameter Data

Data Sheet No. 2 – Seat, Seat Belt, Steering Wheel Adjustment and Fuel Systems Data

Data Sheet No. 3 – Dummy Longitudinal Clearance Dimensions

Data Sheet No. 4 – Dummy Lateral Clearance Dimensions

Data Sheet No. 5 – Camera and instrumentation Data

Data Sheet No. 6 – Vehicle Accelerometer Data

Data Sheet No. 7 – Rigid Pole Load Cell Data

Data Sheet No. 8 – Post-Test Observations

Data Sheet No. 9 – Test Vehicle Profile Measurements

Data Sheet No. 10 – Test Vehicle Exterior Crush Measurements

Data Sheet No. 11 – Vehicle Damage Profile Distances

Data Sheet No. 12 – FMVSS No. 301 Static Rollover Results

Data Sheet No. 13 – Dummy / Vehicle Temperature and Humidity Stabilization Data

**DATA SHEET NO. 1  
GENERAL TEST AND VEHICLE PARAMETER DATA**

Test Vehicle: 2019 Chevrolet Cruze four door sedan  
 Test Program: NCAP Side Pole Impact Test

NHTSA No.: M20190115  
 Test Date: 5/29/2019

**TEST VEHICLE INFORMATION AND OPTIONS**

NHTSA No.	M20190115
Model Year	2019
Make	Chevrolet
Model	Cruze
Body Style	Four Door Sedan
VIN	1G1BC5SM9K7148731
Body Color	Silver
Odometer Reading (km/mi)	49 miles
Engine Displacement (L)	1.4
Type / No. Cylinders	I4
Engine Placement	Transverse
Transmission Type	Automatic
Transmission Speeds	6-Speed
Overdrive	Yes
Final Drive	Front Wheel Drive
Roof Rack	No
Sunroof / T-Top	No
Running Boards	No
Tilt Steering Wheel	Yes
Power Seats	No
Anti-Lock Brakes (ABS)	Yes

Traction Control System (TCS)	Yes
Auto-Leveling System	No
Automatic Door Locks (ADL)	Yes
Power Window Auto-Reverse	No
Other Optional Feature	--
Driver Front Airbag	Yes
Driver Curtain Airbag	Yes
Driver Head/Torso Airbag	No
Driver Torso Airbag	No
Driver Torso / Pelvis Airbag	Yes
Driver Pelvis Airbag	No
Driver Knee Airbag	Yes
Rear Pass. Curtain Airbag	Yes
Rear Pass. Head / Torso Airbag	No
Rear Pass. Torso Airbag	No
Rear Pass. Torso / Pelvis Airbag	Yes
Rear Pass. Pelvis Airbag	No
Driver Seat Belt Pretensioner	Yes
Rear Pass. Seat Belt Pretensioner	No
Driver Load Limiter	Yes
Rear Pass. Load Limiter	No
Other Safety Restraint	-

Does owner's manual provide instructions to turn off automatic door locks? No

**DATA FROM CERTIFICATION LABEL**

Manufactured By	General Motors LLC
Date of Manufacture	02/19
Vehicle Type	Passenger Car

GVWR (kg)	1708
GAWR Front (kg)	912
GAWR Rear (kg)	796

**VEHICLE SEATING AND WEIGHT CAPACITY DATA**

Measured Parameter	Front	Rear	Third	Total		
Designated Seating Capacity (DSC)	2	3	-	5		
Capacity Weight (VCW) (kg)					395	(A)
DSC X 68.04 kg					340.2	(B)
Cargo Weight (RCLW) (kg)					54.8	(A-B)

**VEHICLE SEAT TYPE**

Seating Location	Type of Seat Pan				Type of Seat Back		
	Bucket	Bench	Split Bench	Contoured	Fixed	Adjustable	
						W/ Lever	W/ Knob
Front Seat	X					X	
Rear or Second Row Seat			X		X		
Third Row seat							



**DATA SHEET NO. 1 ... (CONTINUED)  
GENERAL TEST AND VEHICLE PARAMETER DATA**

Test Vehicle: 2019 Chevrolet Cruze four door sedan  
Test Program: NCAP Side Pole Impact Test

NHTSA No.: M20190115  
Test Date: 5/29/2019

**TIRE PRESSURES**

	Units	LF	RF	LR	RR
As Delivered	kPa	250	250	250	250
Tire Placard	kPa	240	240	240	240
Owner's Manual	kPa	240	240	240	240
As Tested	kPa	240	240	240	240

**TEST VEHICLE AXLE WEIGHTS**

	Units	As Delivered (UVW)			As Tested (ATW)			Fully Loaded		
		Front	Rear	Total	Front	Rear	Total	Front	Rear	Total
Left	kg	404	250		422	284.5		430	290	
Right	kg	400	235		408	271.5		402	276	
Ratio	%	62	38		60	40		60	40	
Totals	kg	804	485	1289	830	556	1386	832	566	1398

**TARGET TEST WEIGHT CALCULATION**

Measured Parameter	Units	Value	
Total As Delivered Weight (UVW)	kg	1289	(A)
Actual Weight of 1 P572V (SID-IIs) ATD Used	kg	50	(B)
Rated Cargo / Luggage Weight (RCLW)	kg	54.8	(C)
Calculated Vehicle Target Weight (TVTW)	kg	1393.8	(A+B+C)

Does the measured As Test Vehicle Weight lie within the required weight range  
(i.e. Calculated Test Vehicle Target Weight – 4.5 kg to – 9 kg)?  Yes  No

**TEST VEHICLE ATTITUDES AND CG**

Measurement Description	Units	As Delivered	As Tested	Fully Loaded	Meets Rqmt***
Driver Door Sill Angle (front-to-rear)*	Deg	-0.65	-0.3	-0.2	Yes
Front Passenger Sill Angle (front-to-rear)*	Deg	-0.15	-0.2	-0.2	Yes
Front Bumper-Line Angle (left-to-right)**	Deg	-0.4	-0.4	-0.5	Yes
Rear Bumper-Line Angle (left-to-right)**	Deg	0.05	-0.1	-0.25	Yes
Vehicle CG (Aft of Front Axle)	mm	1016	1084	1094	
Vehicle CG (Left (+) / Right (-) from Longitudinal Centerline)	mm	12	15	23	

\* ND = Nose Down (-), NU = Nose Up (+)

\*\* LD = Left Down (-), LU = Left Up (+)

\*\*\* The "As Tested" vehicle attitude measurements must be equal to or between the "As Delivered" and "Fully Loaded" vehicle attitude measurements. Indicate "Yes" or "No" for Meets Requirement"

**DATA SHEET NO. 1 ... (CONTINUED)**  
**GENERAL TEST AND VEHICLE PARAMETER DATA**

Test Vehicle: 2019 Chevrolet Cruze four door sedan  
 Test Program: NCAP Side Pole Impact Test

NHTSA No.: M20190115  
 Test Date: 5/29/2019

**WEIGHT OF BALLAST AND VEHICLE COMPONENTS REMOVED TO MEET TVTW**

Component Description	Weight (kg)
Trunk Carpeting	4
Pump Kit	1.5
Tail Light	0.5
Passenger Windows and door parts	12
Ballast / Equipment Added	4.5

Test Height – Adjustable Suspension Setting, if Applicable	N/A
--	-----



**DATA SHEET NO. 2**  
**SEAT, SEAT BELT, STEERING WHEEL ADJUSTMENT AND FUEL SYSTEMS DATA**

Test Vehicle: 2019 Chevrolet Cruze four door sedan  
 Test Program: NCAP Side Pole Impact Test

NHTSA No.: M20190115  
 Test Date: 5/29/2019

**SEAT POSITIONING**

*The driver's seat, front center seat (if applicable), and right front passenger's seat should be set to the forward-most, mid-height, mid-angle position. The struck-side rear passenger's seat, rear center seat, and non-struck side rear passenger's seats should be set to the rear-most, lowest, mid-angle position.*

**SCRL ANGLE RANGE**

Seat	SCRL (°)		
	Max	Min	Mid
Driver Seat	18.2	13.8	16
Front Passenger Seat	Not Adjustable		
Front Center Seat	N/A	N/A	N/A
Struck Side Rear Seat	Fixed	Fixed	Fixed
Non-Struck Side Rear Seat	Fixed	Fixed	Fixed
Rear Center Seat	Fixed	Fixed	Fixed

**SEAT HEIGHT AND ANGLE**

Seat	As Tested SCRL Angle (Mid) (°)	As Tested SCRP Height (mm)	SCRP Height Position	SCRP Height (mm)		
				Rearmost	Mid-Fore / Aft	Forward-Most
Driver Seat	16	30	Max	-	-	-
			Mid	12	21	30
			Min	-	-	-
Front Passenger Seat	Not Adjustable		Max	-	-	-
			Mid	-	-	-
			Min	-	-	-
Front Center Seat	N/A	N/A	Max	-	-	-
			Mid	-	-	-
			Min	-	-	-
Struck Side Rear Seat	Fixed	Fixed	Max	-	-	-
			Mid	-	-	-
			Min	-	-	-
Non-Struck Side Rear Seat	Fixed	Fixed	Max	-	-	-
			Mid	-	-	-
			Min	-	-	-
Rear Center Seat	Fixed	Fixed	Max	-	-	-
			Mid	-	-	-
			Min	-	-	-

**DATA SHEET NO. 2 ... (CONTINUED)**  
**SEAT, SEAT BELT, STEERING WHEEL ADJUSTMENT AND FUEL SYSTEMS DATA**

Test Vehicle: 2019 Chevrolet Cruze four door sedan  
 Test Program: NCAP Side Pole Impact Test


NHTSA No.: M20190115  
 Test Date: 5/29/2019

**SEAT FORE / AFT POSITION**

Seat	Total Fore / Aft Travel		Test Position from Forward most Position	
	mm	Detents*	mm	Detents*
Driver Seat	240	25 (0-24)	0	0
Front Passenger Seat	220	23 (0-22)	0	0
Front Center Seat	N/A	N/A	N/A	N/A
Struck Side Rear Seat	FIXED	FIXED	FIXED	FIXED
Non-Struck Side Rear Seat	FIXED	FIXED	FIXED	FIXED
Rear Center Seat	FIXED	FIXED	FIXED	FIXED

**SEAT BACK ANGLE ADJUSTMENT**

The driver's seat back is positioned such that the dummy's head is level. The front center and front passenger's seat backs are positioned in a similar manner as the driver's seat back. The struck-side rear passenger seat back is positioned in accordance with the information provided by the manufacturer on Form No. 1 for the 5<sup>th</sup> percentile female dummy in a Side NCAP MDB test. The rear center and non-struck side rear passenger's seat back are set to match the struck-side rear seat back.



Seat	Total Seat Back Angle Range		Test Position from Most Upright	
	Degrees	Detents*	Degrees	Detents*
Driver Seat w/Seated Dummy	65.4	N/A	27	N/A
Front Passenger Seat	66	N/A	27.6	N/A
Front Center Seat	N/A	N/A	N/A	N/A
Struck Side Rear Seat	FIXED	FIXED	FIXED	FIXED
Non-Struck Side Rear Seat	FIXED	FIXED	FIXED	FIXED
Rear Center Seat	FIXED	FIXED	FIXED	FIXED

**SEAT BELT ANCHORAGE ADJUSTMENT**

Seat belt anchorages are adjusted in accordance with the information provided by the manufacturer on Form No. 1. Zero is defined as the uppermost detent

Seat	Total # of Positions	Placed in Position #
Driver Seat	Fixed	Fixed

**HEAD RESTRAINT ADJUSTMENT**

The driver's head restraint is adjusted to the lowest and most full forward in-use position.

Seat	Total # of Positions	Placed in Position #
Driver Seat	8	Lowest

**DATA SHEET NO. 2 ... (CONTINUED)**  
**SEAT, SEAT BELT, STEERING WHEEL ADJUSTMENT AND FUEL SYSTEMS DATA**


Test Vehicle: 2019 Chevrolet Cruze four door sedan  
 Test Program: NCAP Side Pole Impact Test

NHTSA No.: M20190115  
 Test Date: 5/29/2019

**STEERING COLUMN ADJUSTMENT**

*Steering wheel and column adjustments are made so that the steering wheel hub is at the center of its geometric locus it describes when it moves through its full range of motion.*


	Degrees	Fore / Aft Position (mm)
Lowermost – Position 1	19.9	
Geometric Center – Position 2	22	
Uppermost – Position 3	24	
Telescoping Steering Wheel Travel		60
Test Position	22	30



**FUEL PUMP**

*Describe the fuel pump type, details about how it operates, and the location of the fuel filler neck.*

The vehicle is equipped with an electric fuel pump.  
The fuel filler neck is on the right side of the vehicle.  
The pump creates positive pressure in the fuel lines, pushing the gasoline to the engine. See form 1 for more information.

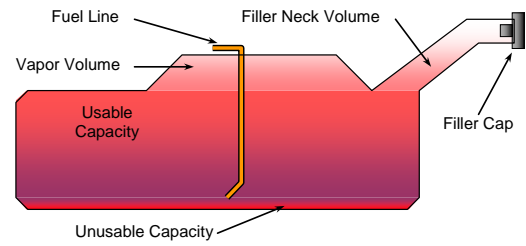

VEHICLE FUEL TANK ASSEMBLY

**FUEL TANK CAPACITY DATA**

Description	Liters
Usable Capacity of "Standard Tank" - see Form No. 1	45.6
Usable Capacity of "Optional Tank" - see Form No. 1	N/A
Usable Capacity of "Standard Tank" - see Owner's Manual	45.6
Usable Capacity of "Optional Tank" - see Owner's Manual	N/A
93% of Usable Capacity	42.4
Actual Amount of Solvent Used in Test	42.4
1/3 of Usable Capacity	15.2


Is the Actual Amount of Solvent Used in the test equal to 93% ±1% of the Usable Capacity stated in Form No. 1?

Yes  No

**DATA SHEET NO. 3**  
**DUMMY LONGITUDINAL CLEARANCE DIMENSIONS**

Test Vehicle: 2019 Chevrolet Cruze four door sedan  
Test Program: NCAP Side Pole Impact Test

NHTSA No.: M20190115  
Test Date: 5/29/2019

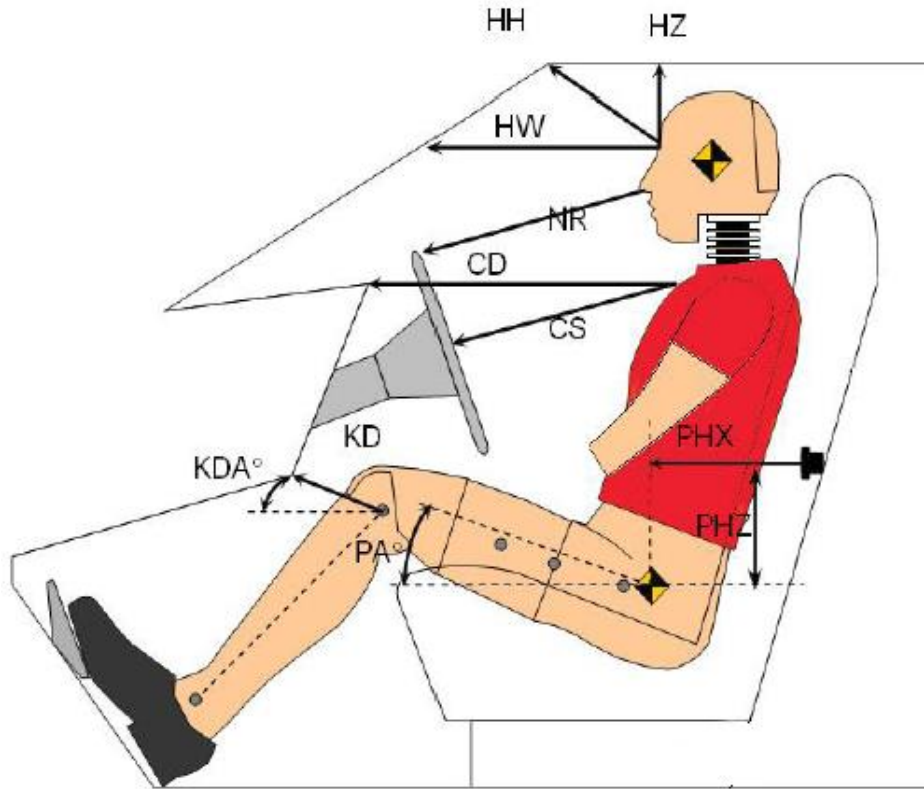

**Left Side View**


**DUMMY LONGITUDINAL CLEARANCE DIMENSION INFORMATION**

Driver Code	Description	Driver (Serial No. DG8012)	
		Length (mm)	Angle (°)
HH	Head to Header	310	
HW	Head to Windshield	744	
HZ	Head to Roof Liner	224	
NR	Nose to Rim	246	
CD	Chest to Dash	427	
CS	Chest to Steering Wheel	213	
KD(L) / KDA(L)°	Left Knee to Dash	172	33.5
KD(R) / KDA(R)°	Right Knee to Dash	175	28.4
PAX°	Pelvic Tilt Angle (X-Axis)		19.9
PAY°	Pelvic Tilt Angle (Y-Axis)		0.3
PHX	Hip Point to Striker (X-Axis)	239	
PHZ	Hip Point to Striker (Z-Axis)	179	

**DATA SHEET NO. 4  
DUMMY LATERAL CLEARANCE DIMENSIONS**

Test Vehicle: 2019 Chevrolet Cruze four door sedan  
 Test Program: NCAP Side Pole Impact Test

NHTSA No.: M20190115  
 Test Date: 5/29/2019

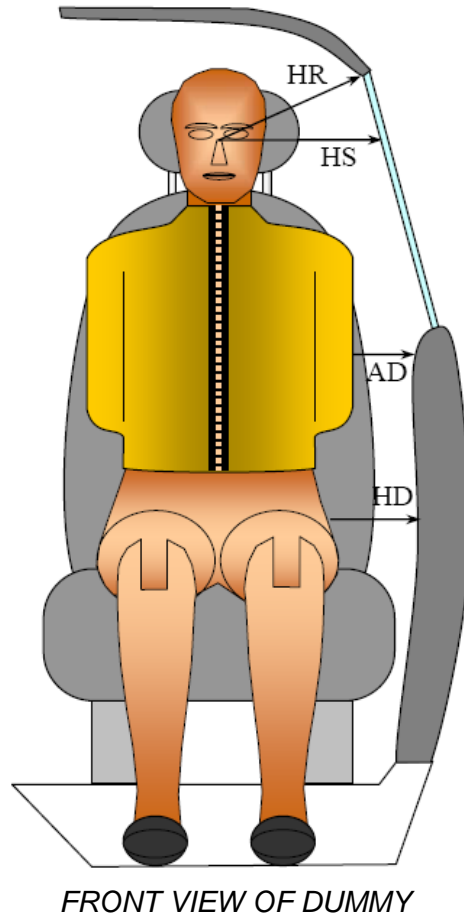


**DUMMY LATERAL CLEARANCE DIMENSION INFORMATION**

Code	Measurement Description	Units	Driver - Length (Serial No. DG8012)
HR	Head To Side Header	mm	253
HS	Head to Side Window	mm	385
AD	Arm to Door	mm	79
HD	Hip Point to Door	mm	183

**DATA SHEET NO. 5  
CAMERA AND INSTRUMENTATION DATA**

Test Vehicle: 2019 Chevrolet Cruze four door sedan  
 Test Program: NCAP Side Pole Impact Test

NHTSA No.: M20190115  
 Test Date: 5/29/2019

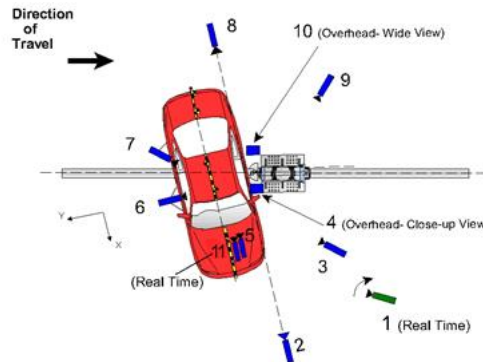

**CAMERA LOCATIONS AND DATA**

No.	Camera View	Coordinates (mm)			Lens Length (mm)	Operating Frame Rate (fps)
		X	Y	Z		
1	Real-time (24 - 30 fps) pan view of impact				Zoom	60
2	Front ground level - impact view	7195	0	-1544	24	1000
3	Impact side 45° - forward pole view	4968	-1371	-1452	24	1000
4	Overhead Close-up view of impact	0	0	-9375	28	1000
5	Onboard - dummy front view				25	1000
6	Onboard - dummy side view				8	1000
7	Onboard - dummy rear oblique view				12.5	1000
8	Rear ground level - impact view	-8472	0	-1365	28	1000
9	Impact side 45° - rearward pole view	-3931	-3750	-1381	24	1000
10	Overhead wide - view of impact	0	0	-9375	12.5	1000
11	Real-time (24 - 30 fps) - dummy front view				Zoom	60

Notes: Reference - From Point of Impact for X and Y; from Ground for Z  
 +X = Forward of vehicle, +Y = Right of vehicle, +Z = Down  
 \* All measurements accurate to ± 6 mm. Vehicle is at a 75° angle to the rigid pole.

Comments: All cameras operated as intended.


**INSTRUMENTATION**

Description	Number of Channels
Driver Dummy Channels	16
Vehicle Structure Accelerometers	18
Pole Load Cells	8
<b>Total</b>	<b>42</b>

**DATA SHEET NO. 6  
VEHICLE ACCELEROMETER DATA**

Test Vehicle: 2019 Chevrolet Cruze four door sedan  
 Test Program: NCAP Side Pole Impact Test

NHTSA No.: M20190115  
 Test Date: 5/29/2019

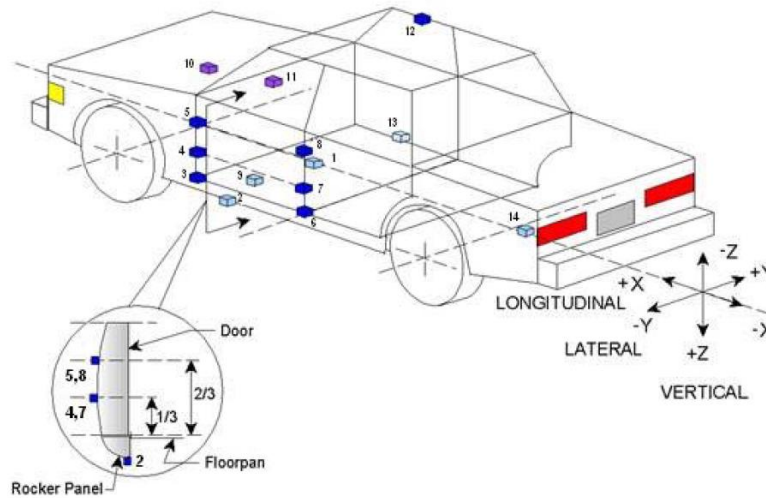

**TEST VEHICLE ACCELEROMETER LOCATIONS**

No.	Accelerometer Location	Coordinates (mm)		
		X	Y	Z
1	Vehicle CG	2523	-4	140
2	Left Floor Sill	2823	-663	288
3	A-Pillar Sill	3205	-618	221
4	A-Pillar Low	3239	-607	36
5	A-Pillar Mid	3193	-622	-396
6	B-Pillar Sill	2185	-661	305
7	B-Pillar Low	2235	-666	44
8	B-Pillar Mid	2152	-657	-304
9	Driver Seat Track	2275	-537	298
10	Engine Top	4000	209	-173
11	Firewall	3607	262	-162
12	Right Roof	2093	521	-849
13	Right Floor Sill	2818	665	295
14	Rear Floorpan	904	7	134

Reference: X – Rear surface of vehicle (+ forward)  
 Y – Vehicle centerline (+ to right)  
 Z – Ground plane (+ down)

**DATA SHEET NO. 7  
RIGID POLE LOAD CELL DATA**

Test Vehicle: 2019 Chevrolet Cruze four door sedan  
Test Program: NCAP Side Pole Impact Test

NHTSA No.: M20190115  
Test Date: 5/29/2019

**POLE BARRIER**



**RIGID POLE LOAD CELL LOCATIONS**

<b>ID</b>	<b>Units</b>	<b>Height From Ground</b>
1	mm	200
2	mm	590
3	mm	750
4	mm	1075
5	mm	1260
6	mm	1740
7	mm	1920
8	mm	2300



**DATA SHEET NO. 8  
POST-TEST OBSERVATIONS**

Test Vehicle: 2019 Chevrolet Cruze four door sedan  
 Test Program: NCAP Side Pole Impact Test

NHTSA No.: M20190115  
 Test Date: 5/29/2019

**TEST DUMMY INFORMATION AND CONTACT POINTS**

Dummy Body Part	Driver Seat Dummy (SID-IIs)
Face	Curtain Airbag
Top of Head	Curtain Airbag
Left Side of Head	Curtain Airbag
Back of Head	Curtain Airbag
Left Shoulder	Seatback & Torso/Pelvis Airbag
Upper Torso	Seatback & Torso/Pelvis Airbag
Lower Torso	Seatback
Left Hip	Seatpan & Seatback & Torso/Pelvis Airbag
Left Knee	Driver Door

**POST-TEST DOOR PERFORMANCE**

Description	Struck Side		Non-Struck Side		Rear Hatch/Other
	Front	Rear	Front	Rear	
Remained Closed and Operational	No	No	Yes	Yes	Yes
Total Separation from Vehicle at Hinges or Latches	No	No	No	No	No
Latch or Hinge Systems Pulled Out of Their Anchorages	No	No	No	No	No
Disengaged from Latched Position	No	No	No	No	No
Latch Separated from Striker	No	No	No	No	No
Jammed Shut	Yes	Yes	No	No	No
If Door Opened at Striker, Width of Opening at Striker (mm)	0	0	0	0	0

**POST-TEST SEAT PERFORMANCE**

Description	Struck Side		Non-Struck Side	
	Front	Rear	Front	Rear
Seat Movement Along Seat Track	No	No	No	No
Seat Disengagement from Floor Pan	No	No	No	No
Seat Back Movement from Initial Position	No	No	No	No
Seat Back Collapse	No	No	No	No

**DATA SHEET NO. 8 ... (CONTINUED)  
POST-TEST OBSERVATIONS**

Test Vehicle: 2019 Chevrolet Cruze four door sedan  
 Test Program: NCAP Side Pole Impact Test

NHTSA No.: M20190115  
 Test Date: 5/29/2019

**POST-TEST STRUCTURAL OBSERVATIONS**

Critical Areas of Performance	Observations and Conclusions
Pillar Performance	A-Pillar Buckled
Sill Separation	None
Windshield Damage	Cracks throughout with some separation along drive A-Pillar
Side Window Damage	Driver window shattered during impact
Other Notable Effects	None

**SUPPLEMENTAL RESTRAINT SYSTEM INFORMATION**

Restraint Type	Struck Side Driver		Struck Side Rear Passenger	
	Mounted	Deployed	Mounted	Deployed
Frontal Airbag	Yes	No		
Knee Airbag	Yes	No		
Side Airbag 1 - Curtain	Yes	Yes	Yes	Yes
Side Airbag 2 – Torso/Pelvis	Yes	Yes	Yes	Yes
Seat Belt Pretensioner	Yes	Yes	No	N/A
Seat Belt Load Limiter	Yes	Yes	No	N/A
Other				

**VEHICLE SPEED, VEHICLE ANGLE AT IMPACT AND IMPACT POINT LOCATION DATA**


Measured Parameter	Units	Tolerance	Value
Vertical Impact Ref Line - Aft of Front Axle, Intended Impact Pt	mm		1103
Actual Impact Point - Aft of Front Axle	mm		1109
Horizontal Offset (+ forward / - rearward)	mm	+/- 38 *	-6
Angle Between Vehicle's Longitudinal Centerline and Line of Forward Motion	deg	75 +/- 3	75.0
Trap No. 1 Velocity - Primary	kph	31.4 to 33.0	32.36
Trap No. 2 Velocity - Redundant	kph	31.4 to 33.0	32.33

\* Of Intended Impact Point

**DATA SHEET NO. 9**  
**TEST VEHICLE PROFILE MEASUREMENTS**

Test Vehicle: 2019 Chevrolet Cruze four door sedan  
Test Program: NCAP Side Pole Impact Test

NHTSA No.: M20190115  
Test Date: 5/29/2019

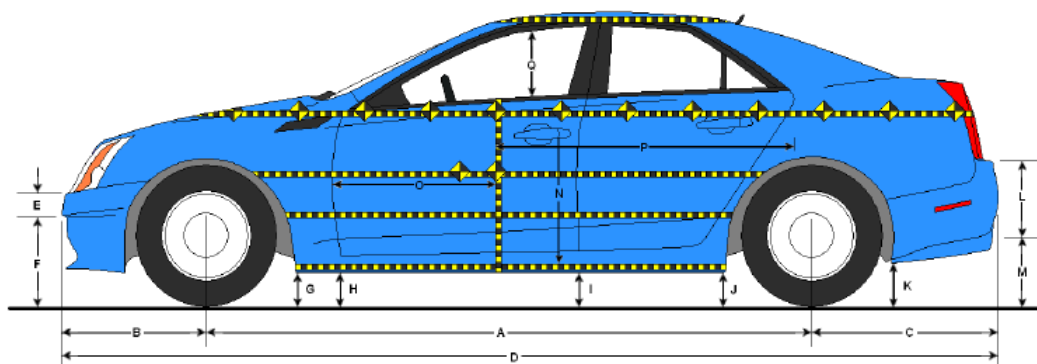

LEFT SIDE VIEW

**VEHICLE PRE- AND POST-TEST MEASUREMENT INFORMATION**



Code	Description	Pre-Test	Post-Test	Difference
A	Vehicle Wheelbase	2701	2655	46
B	Front Axle to FSOV	970	994	-24
C	Rear Axle to RSOV	988	983	5
D	Total Length at Centerline	4659	4632	27
E	Front Bumper Thickness	390	390	0
F	Front Bumper Bottom to Ground	225	260	-35
G	Sill Height at Front Wheel Well	188	190	-2
H	Sill Height at Front Door Leading Edge	188	187	1
I	Sill Height at B-Pillar	191	210	-19
J1	Sill Height at Rear Wheel Well	197	204	-7
J2	Pinch Weld Height at Rear Wheel Well	170	197	-27
K	Sill Height Aft of Rear Wheel Well	231	251	-20
L	Rear Bumper Thickness	237	237	0
M	Rear Bumper Bottom to Ground	335	325	10
N	Sill Height to Bottom of Front Window Sill	817	820	-3
O	Front Door Leading Edge to Impact CL	666	603	63
P	Rear Door Trailing Edge to Impact CL	1402	1328	74
Q	Front Window Opening	396	388	8
R	Right Side Length	4486	4484	2
S	Left Side Length	4486	4437	49
T	Vehicle Width at B-Pillars	1787	1661	126

\* All measurements in mm with tolerance of ± 3mm

**DATA SHEET NO. 10**  
**TEST VEHICLE EXTERIOR CRUSH MEASUREMENTS**

Test Vehicle: 2019 Chevrolet Cruze four door sedan  
 Test Program: NCAP Side Pole Impact Test

NHTSA No.: M20190115  
 Test Date: 5/29/2019

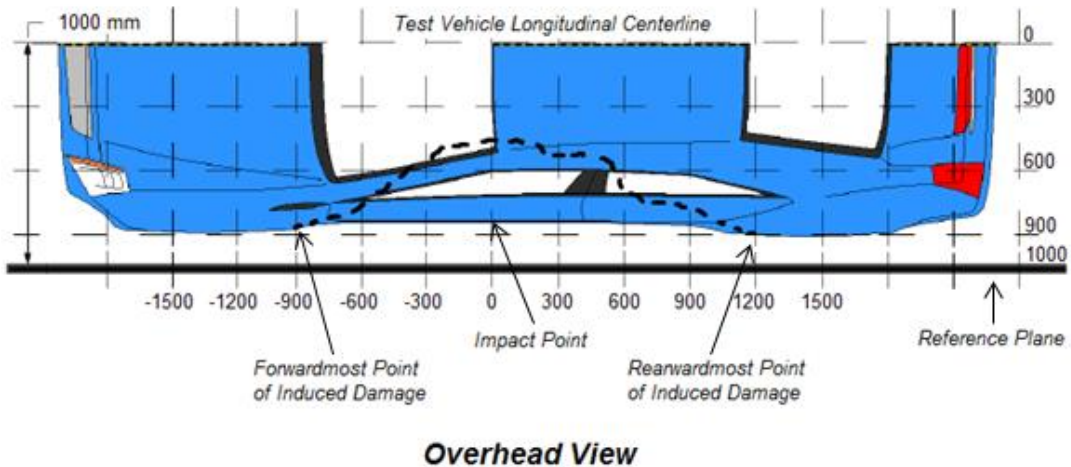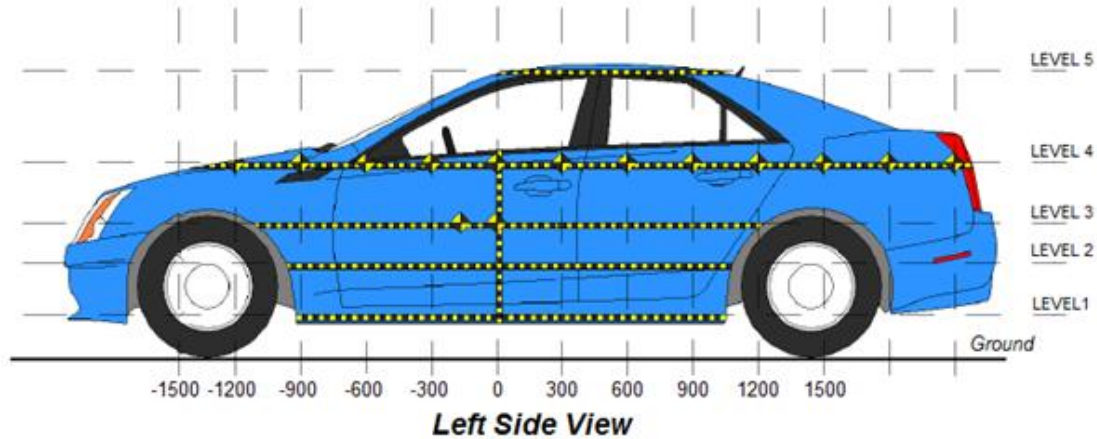

**MAXIMUM EXTERIOR CRUSH MEASUREMENTS**

Level	Measurement Description	Units	Height Above Ground	Maximum Exterior Static Crush	Distance from Impact
1	Sill Top	mm	238	279	0
2	Occupant Hip Point	mm	493	312	0
3	Mid - Door	mm	617	326	0
4	Window Sill	mm	907	288	0
5	Window Top	mm	1385	114	0

**NOTE:** The above measurements should be taken along the vertical impact reference line. Vehicle measurements forward of the vertical impact reference line are negative.

**DATA SHEET NO. 10 ... (CONTINUED)**  
**TEST VEHICLE EXTERIOR CRUSH MEASUREMENTS**

Test Vehicle: 2019 Chevrolet Cruze four door sedan  
 Test Program: NCAP Side Pole Impact Test

NHTSA No.: M20190115  
 Test Date: 5/29/2019

**EXTERIOR CRUSH MEASUREMENTS AT EACH LEVEL**


	Pre-Test					Post-Test					Difference				
	1	2	3	4	5	1	2	3	4	5	1	2	3	4	5
-1500															
-1350															
-1200															
-1050				781					814					-33	
-900				799					819					-20	
-750		885	887	799			879	880	797			6	7	2	
-600	845	882	885	807		807	845	854	796		38	37	31	11	
-450	848	880	886	872		759	776	785	811		89	104	101	61	
-300	850	881	887	822		707	715	720	690		143	166	167	132	
-150	852	881	889	828		648	654	649	622		204	227	240	206	
0	854	882	890	833	588	575	570	564	545	474	279	312	326	288	114
150	856	882	891	837	595	602	586	577	567	495	254	296	314	270	100
300	856	881	892	841	596	691	709	700	679	513	165	172	192	162	83
450	857	880	891	846	593	741	764	778	739	526	116	116	113	107	67
600	857	878	889	854	592	778	790	803	769	545	79	88	86	85	47
750	857	877	887	860	591	810	817	825	794	558	47	60	62	66	33
900	856	878	886	863	585	838	843	846	817	566	18	35	40	46	19
1050	858	883	886	859	566	863	873	868	834	558	-5	10	18	25	8
1200	862	893	891	846		879	908	895	842		-17	-15	-4	4	
1350			900	850				898	865				2	-15	
1500				846				--	855					-9	

**NOTE:** Pre-test measurements are taken when the vehicle is in the "As Tested" weight condition. Vehicle measurements forward of the vertical impact reference line are negative. The crush profile grid is established prior to the test based on an estimated impact point. The final distance from impact is determined after the final dummy positioning and the pole is aligned with the center of gravity of the dummy's head.

**DATA SHEET NO. 10 ... (CONTINUED)**  
**TEST VEHICLE EXTERIOR CRUSH MEASUREMENTS**

Test Vehicle: 2019 Chevrolet Cruze four door sedan  
 Test Program: NCAP Side Pole Impact Test

NHTSA No.: M20190115  
 Test Date: 5/29/2019

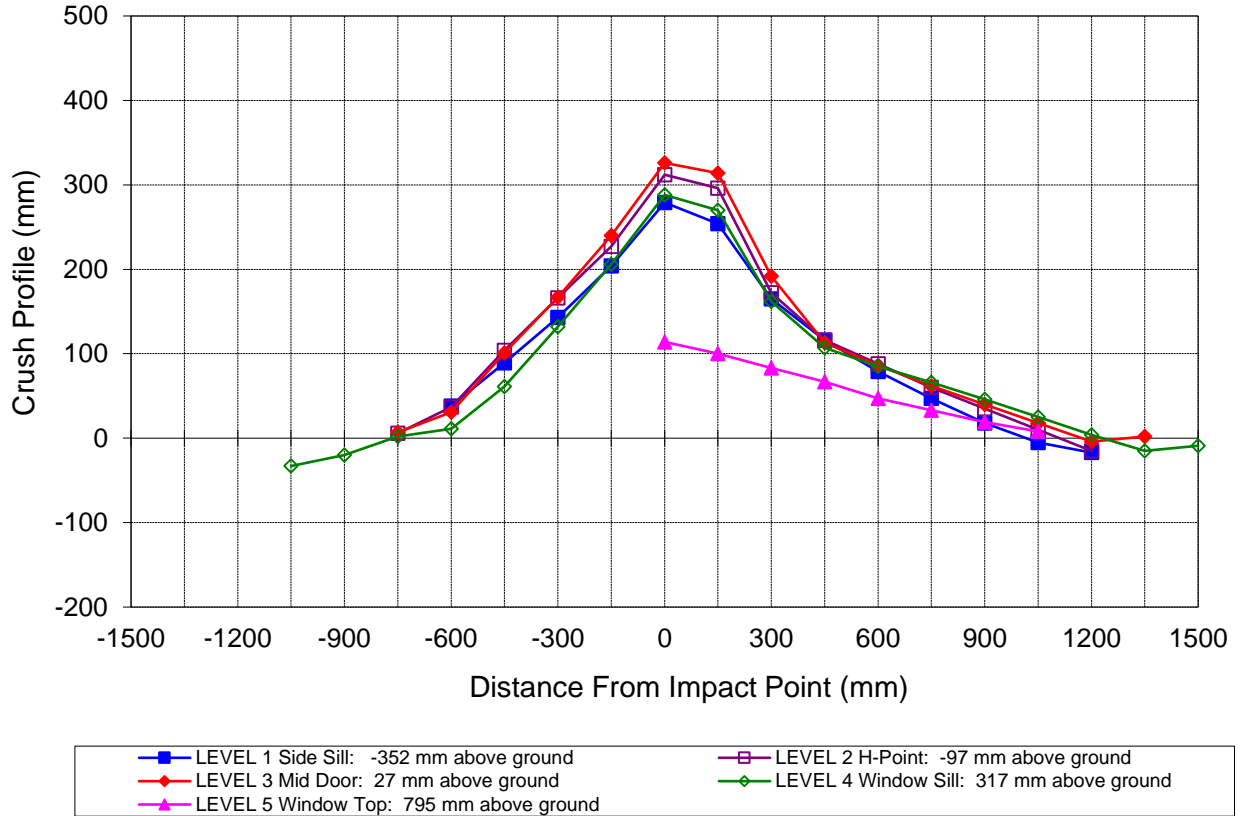


**Vehicle Exterior Crush Measurements - Visual Representation**

**DATA SHEET NO. 11  
VEHICLE DAMAGE PROFILE DISTANCES**

Test Vehicle: 2019 Chevrolet Cruze four door sedan  
 Test Program: NCAP Side Pole Impact Test

NHTSA No.: M20190115  
 Test Date: 5/29/2019

For guidance regarding damage profile distance measurements, please refer to the latest version of the *NHTSA Test Reference Guide, Volume 1: Vehicle Tests*.

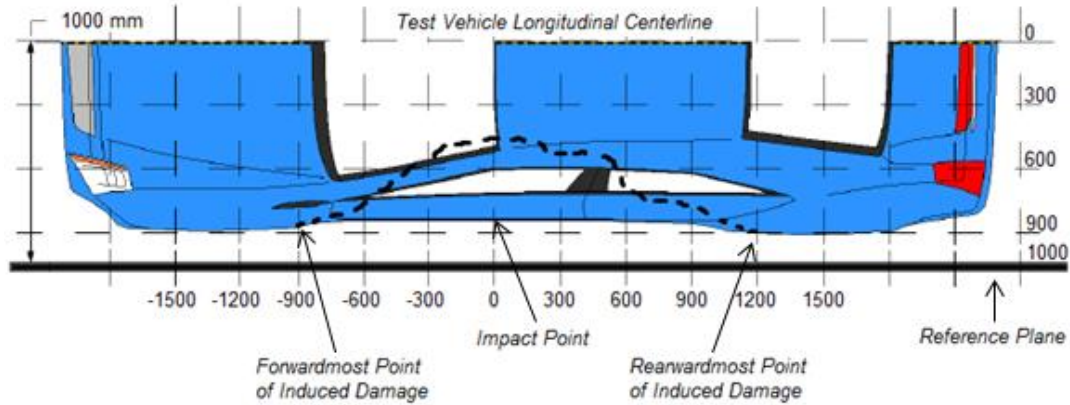

**Overhead View**

**VEHICLE DAMAGE PROFILE DISTANCES**

DPD	Distance From Impact Point (mm)	Level	Post-Test (mm)	Pre-Test (mm)	Crush (mm)
1	-750	3	120	113	7
2	-330	3	267	113	154
3	90	3	428	109	319
4	510	3	212	110	102
5	930	3	150	114	36
6	1350	3	102	100	2

**DATA SHEET NO. 12  
FMVSS NO. 301 STATIC ROLLOVER RESULTS**

Test Vehicle:	<u>2019 Chevrolet Cruze four door sedan</u>	NHTSA No.:	<u>M20190115</u>
Test Program:	<u>NCAP Side MDB Impact Test</u>	Test Date:	<u>5/29/2019</u>
Test Time:	<u>9:45 AM</u>	Temperature:	<u>21° C</u>

- A. From impact until vehicle motion ceases: 0 oz.  
(Maximum allowable is 1 oz.)
- B. For the 5-minute period after motion ceases: 0 oz.  
(Maximum allowable is 5 oz.)
- C. For the following 25 minutes: 0 oz.  
(Maximum allowable is 1 oz./minute)
- D. Spillage Details: No Spillage Occurred

**FMVSS NO. 301 STATIC ROLLOVER DATA**



**ROLLOVER SOLVENT COLLECTION TIME TABLE IN SECONDS**

Test Phase	Rotation Time	Hold Time	Total Time
0° to 90°	72	300	372
90° to 180°	64	300	364
180° to 270°	62	300	362
270° to 360°	69	300	369

**FMVSS NO. 301 ROLLOVER SPILLAGE TABLE**

Test Phase	First 5 Minutes	Sixth Minute	Seventh Minute	Eighth Minute
0° to 90°	0	0	0	0
90° to 180°	0	0	0	0
180° to 270°	0	0	0	0
270° to 360°	0	0	0	0

**ROLLOVER SOLVENT SPILLAGE LOCATION TABLE**


Test Phase	Spillage Location
0° to 90°	No Spillage Occurred
90° to 180°	No Spillage Occurred
180° to 270°	No Spillage Occurred
270° to 360°	No Spillage Occurred



**DATA SHEET NO. 13**  
**DUMMY / VEHICLE TEMPERATURE AND HUMIDITY STABILIZATION DATA**

Test Vehicle: 2019 Chevrolet Cruze four door sedan  
 Test Program: NCAP Side Pole Impact Test

NHTSA No.: M20190115  
 Test Date: 5/29/2019

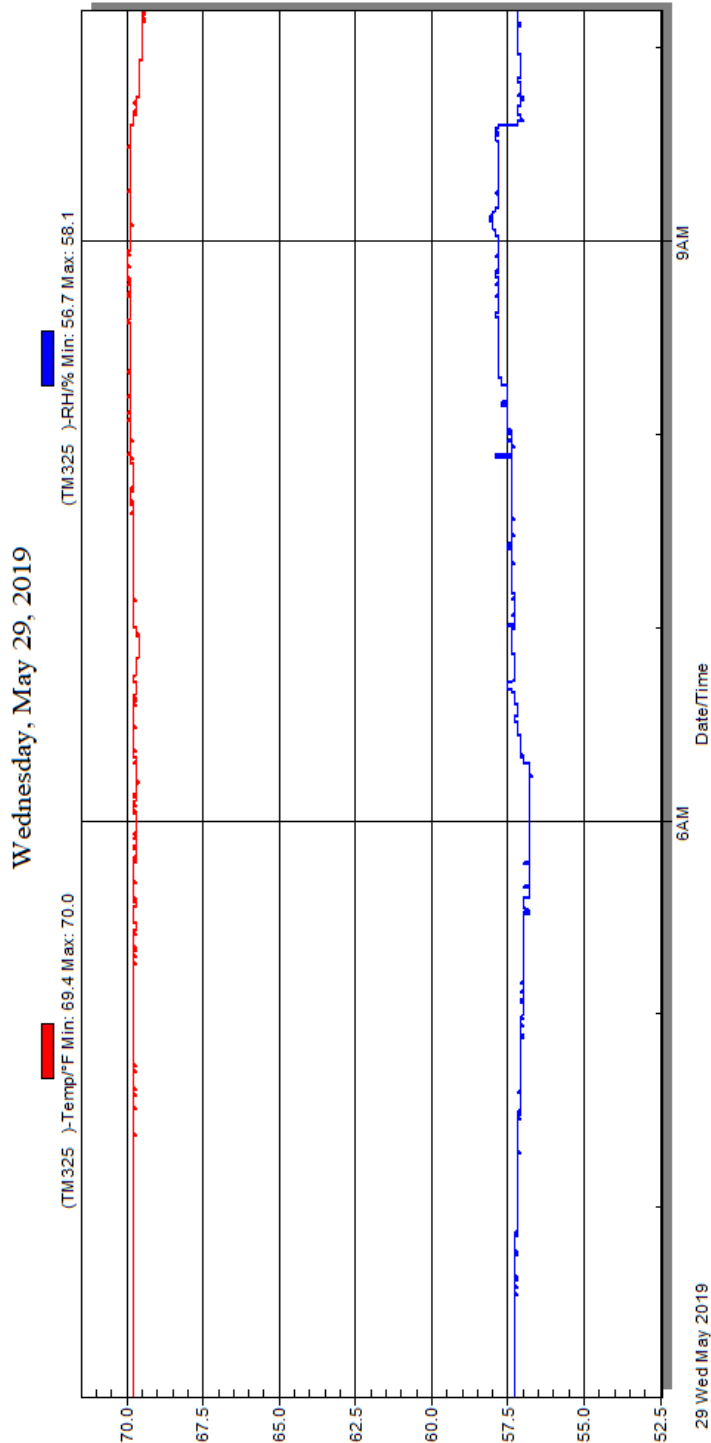

**Temperature and Humidity Stabilization Chart / Data for Dummies and Test Vehicle**

**APPENDIX A**  
**PHOTOGRAPHS**

## TABLE OF PHOTOGRAPHS

Fig.	Description	Page
1	As Delivered Right Front $\frac{3}{4}$ View of Test Vehicle	A-4
2	As Delivered Left Rear $\frac{3}{4}$ View of Test Vehicle	A-4
3	Pre-Test Frontal View of Test Vehicle	A-5
4	Post-Test Frontal View of Test Vehicle	A-5
5	Pre-Test Left Front $\frac{3}{4}$ View of Test Vehicle	A-6
6	Post-Test Left Front $\frac{3}{4}$ View of Test Vehicle	A-6
7	Pre-Test Left Side View of Test Vehicle	A-7
8	Post-Test Left Side View of Test Vehicle	A-7
9	Pre-Test Left Rear $\frac{3}{4}$ View of Test Vehicle	A-8
10	Post-Test Left Rear $\frac{3}{4}$ View of Test Vehicle	A-8
11	Pre-Test Rear View of Test Vehicle	A-9
12	Post-Test Rear View of Test Vehicle	A-9
13	Pre-Test Right Side View of Test Vehicle	A-10
14	Post-Test Right Side View of Test Vehicle	A-10
15	Pre-Test Overhead View of Test Area	A-11
16	Post-Test Overhead View of Test Area	A-11
17	Pre-Test Left Side View of Pole Positioned Against Side of Vehicle	A-12
18	Pre-Test Right Side View of Pole Positioned Against Side of Vehicle	A-12
19	Pre-Test Close-Up View of Impact Point Target	A-13
20	Post-Test Close-Up View of Impact Point Target Showing Impact Location	A-13
21	Pre-Test Front Close-Up View of Dummy Head and Chest	A-14
22	Post-Test Front Close-Up View of Dummy	A-14
23	Pre-Test Left Side View of Dummy Showing Belt and Chalking	A-15
24	Pre-Test Left Side View of Dummy Shoulder and Door Top View	A-15
25	Post-Test Left Side View of Dummy Shoulder and Door Top View	A-16
26	Pre-Test Frontal View of Seat Back Prior to Dummy Positioning	A-16
27	Pre-Test Frontal Close-Up View of Dummy Head / Shoulders in Relation to Head Restraint	A-17
28	Pre-Test Frontal View of Seat Pan Prior to Dummy Positioning	A-17
29	Pre-Test Overhead View of Dummy Thighs on Seat Pan	A-18
30	Pre-Test Left Side View of Dummy's Neck Showing Position of Adjustable Neck Bracket	A-18
31	Pre-Test Left Side View of Dummy's Head Showing Dummy's Head is Level	A-19
32	Pre-Test Placement of Dummy's Feet	A-19
33	Pre-Test View of Belt Anchorage for Dummy	A-20
34	Pre-Test Left Side View of Steering Wheel	A-20
35	Pre-Test View of Disengaged Parking Brake	A-21

<b>Fig.</b>	<b>Description</b>	<b>Page</b>
36	Pre-Test View of Parking Brake	A-21
37	Pre-Test Close-Up Left Side View of Driver Seat Track	A-22
38	Pre-Test Close-Up Left Side View of Driver Seat Back	A-22
39	Pre-Test Close-Up View of Driver Seat Back or Head Restraint	A-23
40	Pre-Test Dummy and Door Clearance View	A-23
41	Post-Test Dummy and Door Clearance View	A-24
42	Pre-Test Right Side View of Dummy and Front Seat of Occupant Compartment	A-24
43	Post-Test Right Side View of Dummy and Front Seat of Occupant Compartment	A-25
44	Pre-Test Inner Door Panel View	A-25
45	Post-Test Inner Door Panel View Showing Dummy Contact Location	A-26
46	Post-Test Dummy Close-Up Head Contact with Vehicle Interior View	A-26
47	Post-Test Dummy Close-Up Head Contact with Side Airbag View	A-27
48	Post-Test Dummy Close-Up Torso Contact with Vehicle Interior View	A-27
49	Post-Test Dummy Close-Up Torso Contact with Side Airbag View	A-28
50	Post-Test Dummy Close-Up Pelvis Contact with Vehicle Interior View	A-28
51	Post-Test Dummy Close-Up Pelvis Contact with Side Airbag View	A-29
52	Post-Test Dummy Close-Up Knee Contact with Vehicle Interior View	A-29
53	Pre-Test View of Fuel Filler Cap or Fuel Filler Neck	A-30
54	Post-Test View of Fuel Filler Cap or Fuel Filler Neck	A-30
55	Close-Up View of Vehicle's Certification Label	A-31
55a	Close-Up View of Reduced Load Capacity Label	A-31
56	Close-Up View of Vehicle's Tire Information Placard or Label	A-32
57	Pre-Test Pole Barrier Front View	A-32
58	Post-Test Pole Barrier Front View	A-33
59	Pre-Test Pole Barrier Side View	A-33
60	Post-Test Pole Barrier Side View	A-34
61	Pre-Test Ballast View	A-34
62	Post-Test Primary and Redundant Speed Trap Read-Out	A-35
63	FMVSS No. 301 Static Rollover 0 Degrees	A-35
64	FMVSS No. 301 Static Rollover 90 Degrees	A-36
65	FMVSS No. 301 Static Rollover 180 Degrees	A-36
66	FMVSS No. 301 Static Rollover 270 Degrees	A-37
67	FMVSS No. 301 Static Rollover 360 Degrees	A-37
68	Impact Event	A-38
69	Monroney Label	A-38
70	Head Restraint Use and Adjustment Information from Vehicle Owner's Manual	A-39
71	Post-Test View of Shattered Vehicle Inner Door Panel	A-39



M20190115

**Figure A-1: As Delivered Right Front ¾ View of Test Vehicle**



M20190115

**Figure A-2: As Delivered Left Rear ¾ View of Test Vehicle**






**Figure A-3: Pre-Test Frontal View of Test Vehicle**



**Figure A-4: Post-Test Frontal View of Test Vehicle**



**Figure A-5: Pre-Test Left Front ¾ View of Test Vehicle**

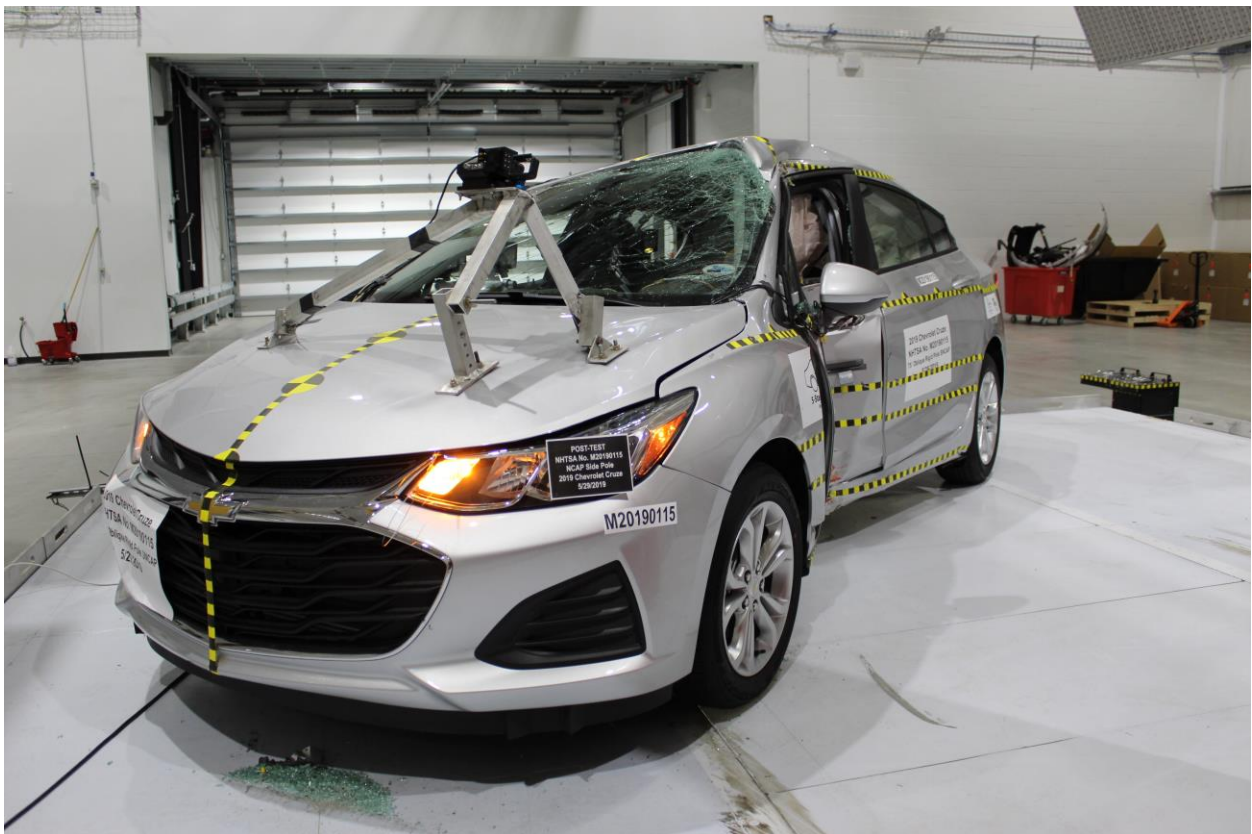

**Figure A-6: Post-Test Left Front ¾ View of Test Vehicle**





**Figure A-7: Pre-Test Left Side View of Test Vehicle**



**Figure A-8: Post-Test Left Side View of Test Vehicle**






**Figure A-9: Pre-Test Left Rear  $\frac{3}{4}$  View of Test Vehicle**



**Figure A-10: Post-Test Left Rear  $\frac{3}{4}$  View of Test Vehicle**



**Figure A-11: Pre-Test Rear View of Test Vehicle**

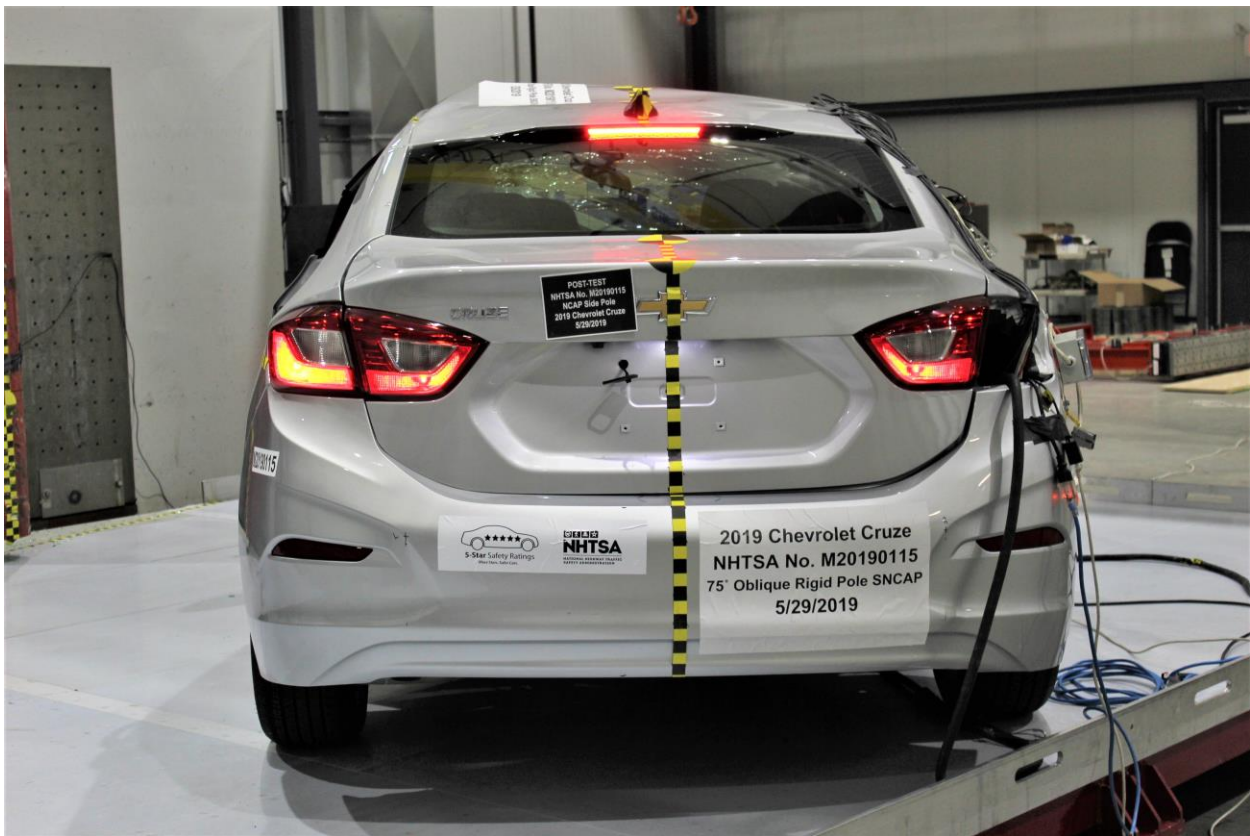


**Figure A-12: Post-Test Rear View of Test Vehicle**







**Figure A-13: Pre-Test Right Side View of Test Vehicle**

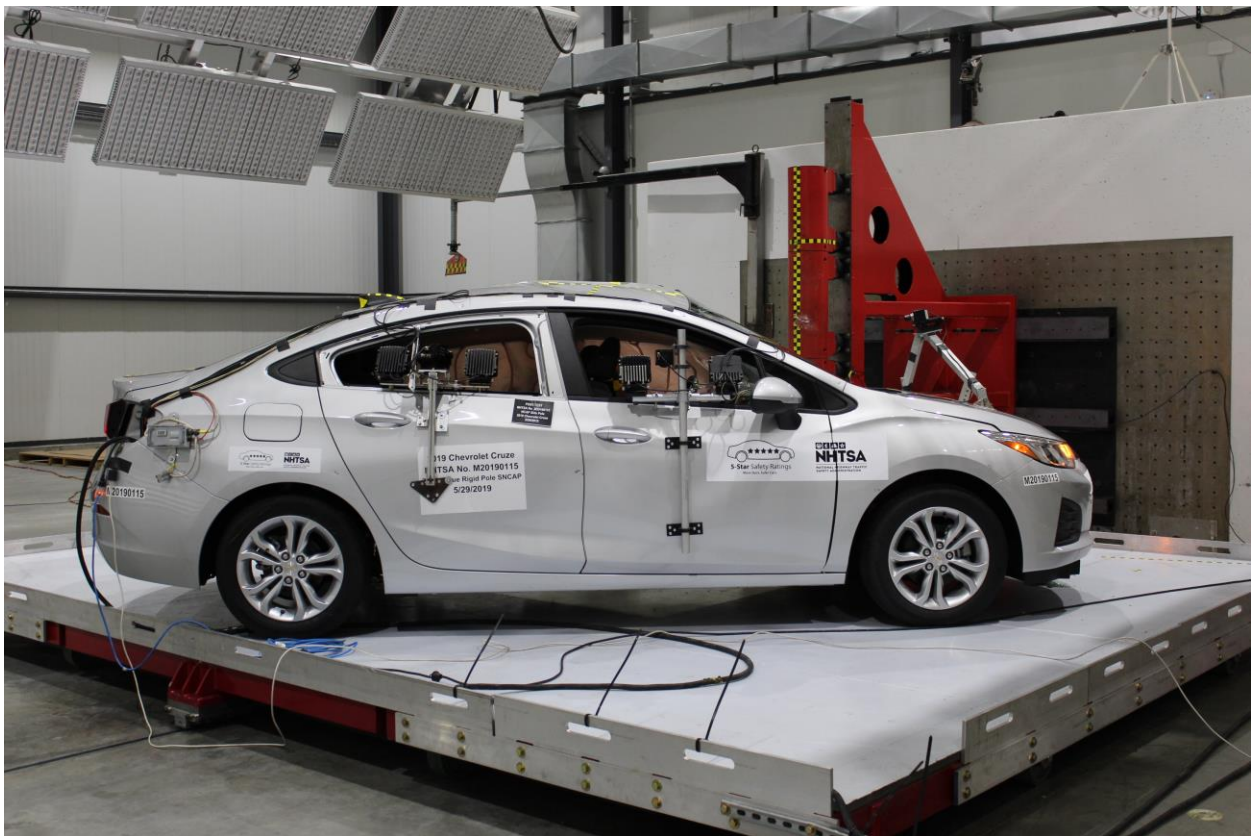

**Figure A-14: Post-Test Right Side View of Test Vehicle**

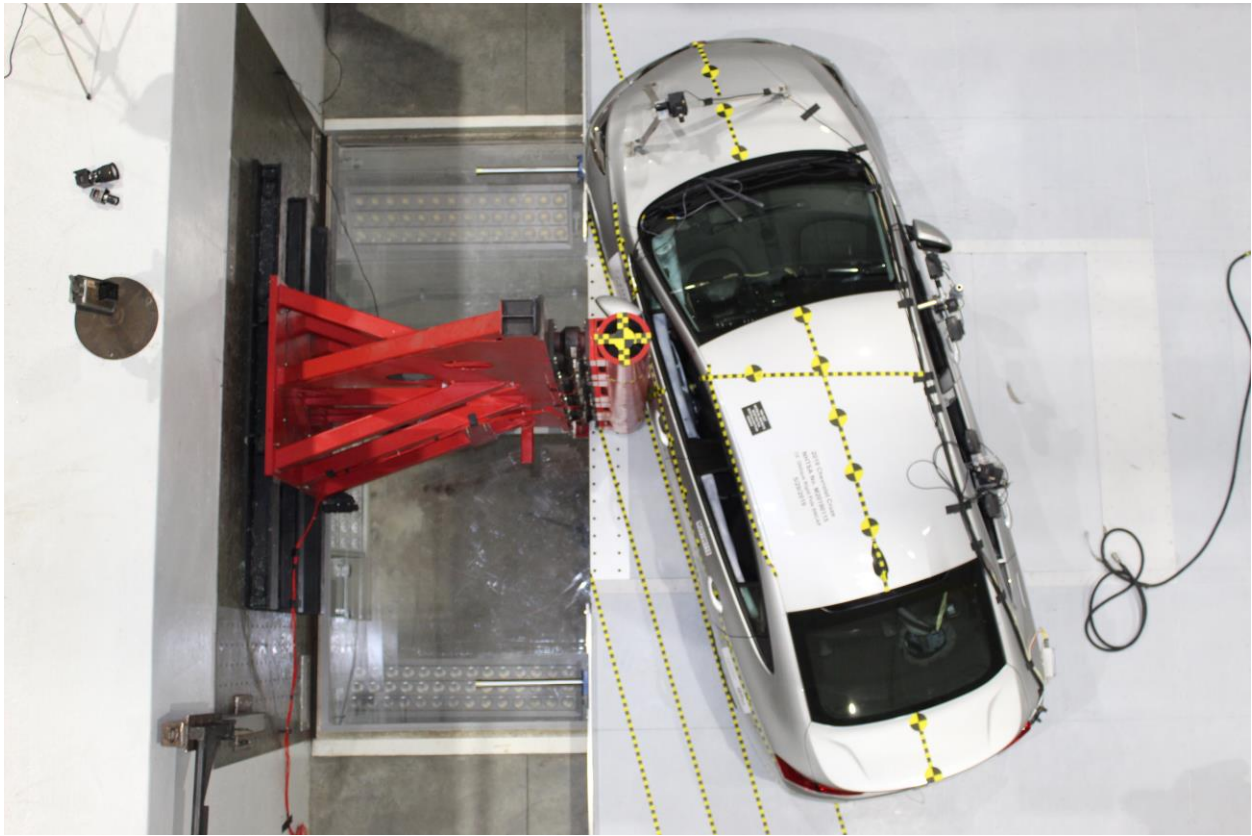


**Figure A-15: Pre-Test Overhead View of Test Area**

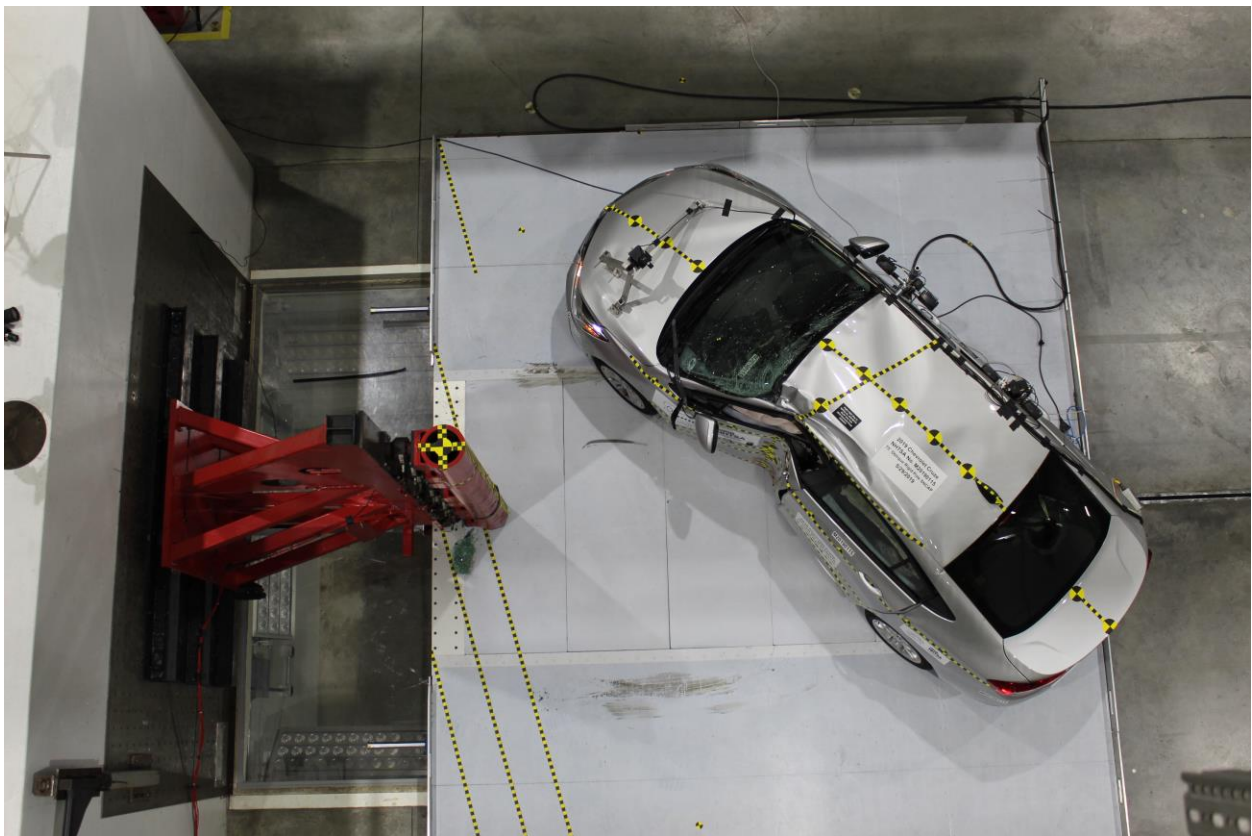


**Figure A-16: Post-Test Overhead View of Test Area**



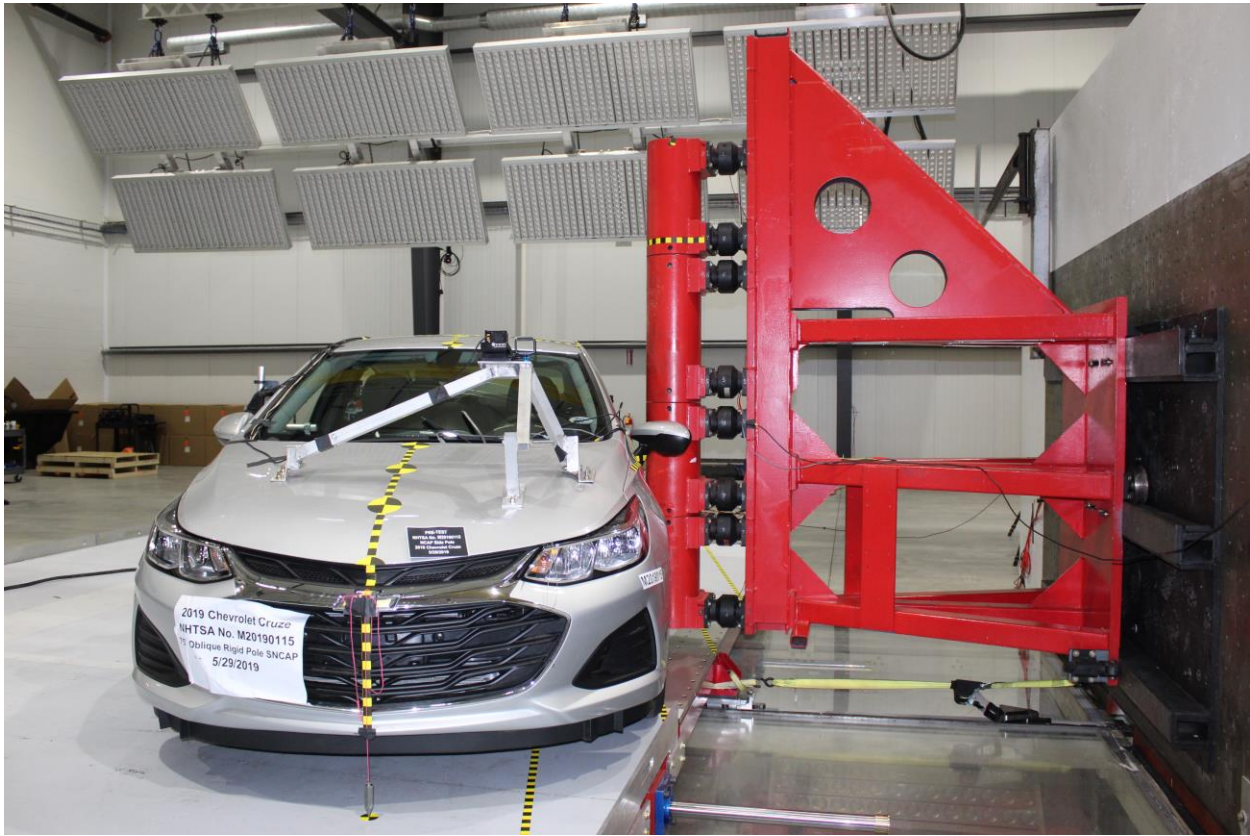

**Figure A-17: Pre-Test Left Side View of Pole Positioned Against Side of Vehicle**

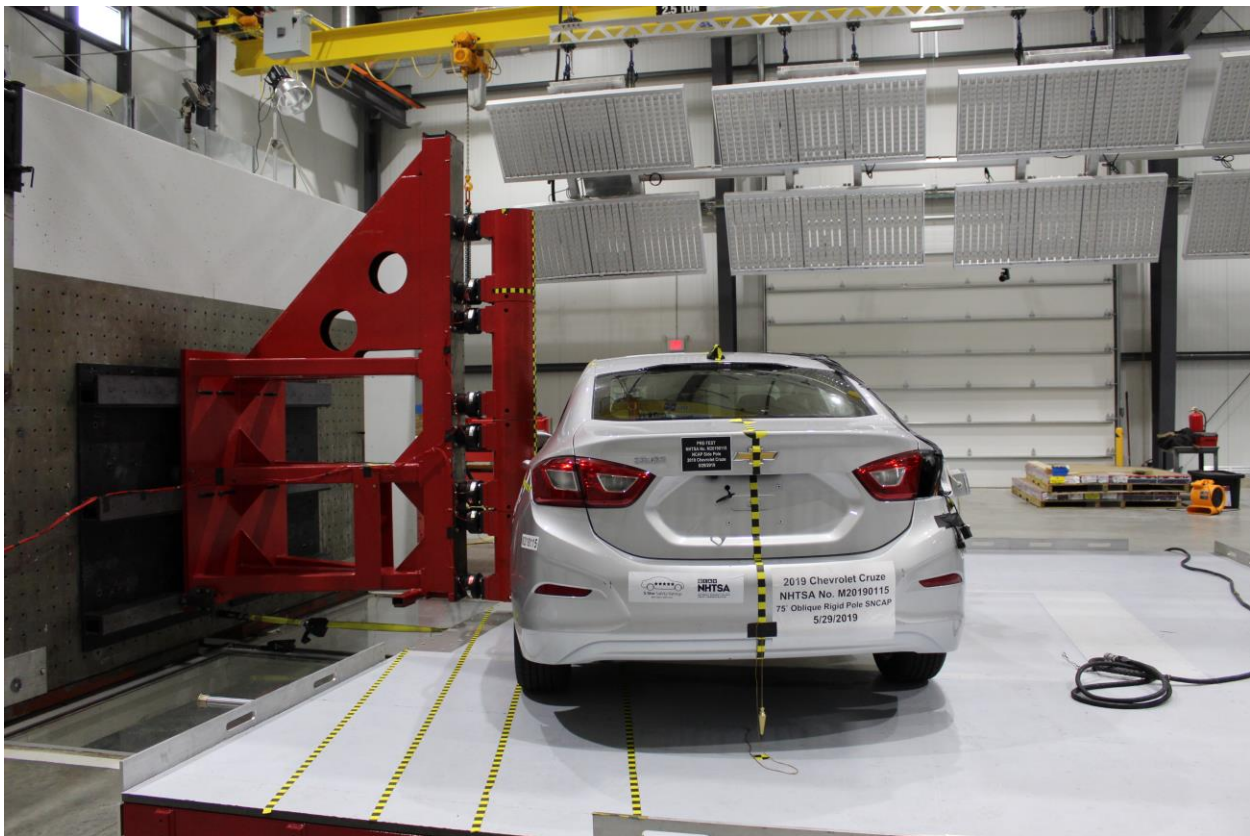

**Figure A-18: Pre-Test Right Side View of Pole Positioned Against Side of Vehicle**

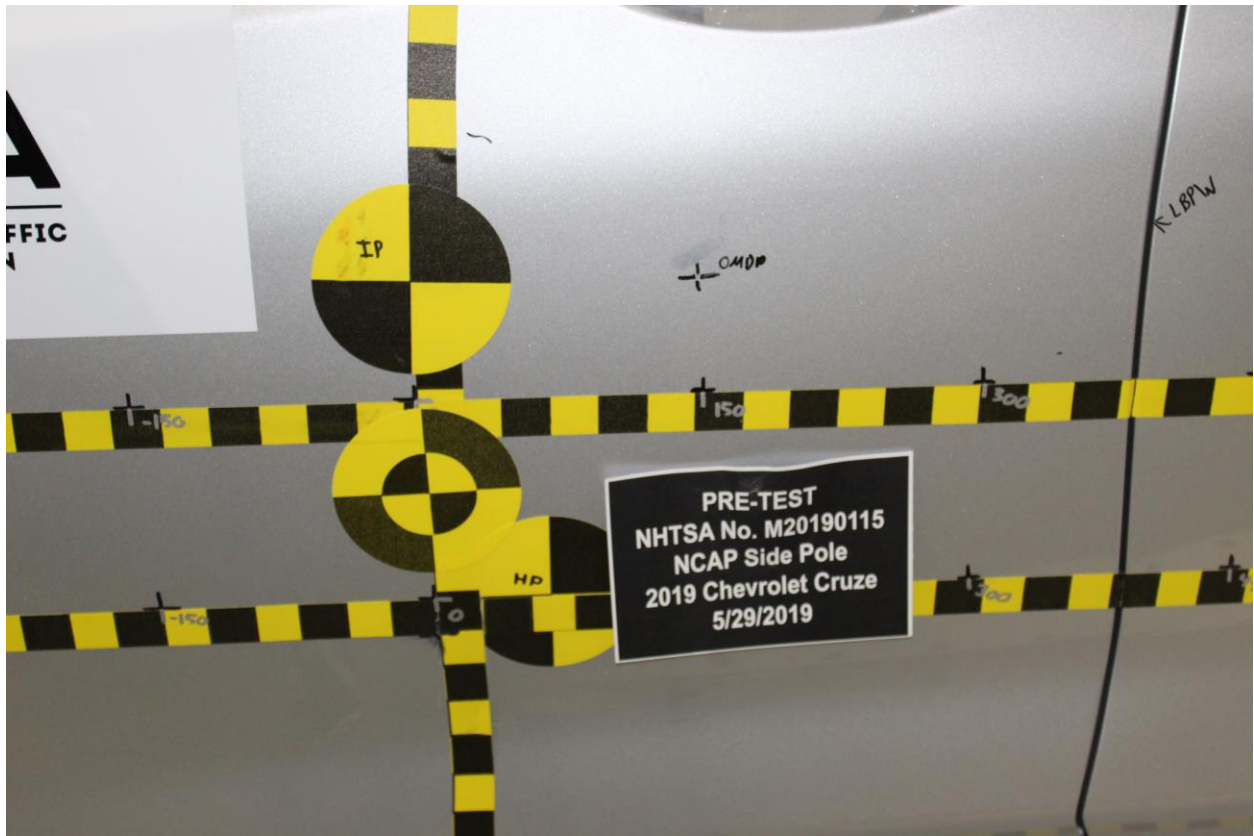


Figure A-19: Pre-Test Close-Up View of Impact Point Target


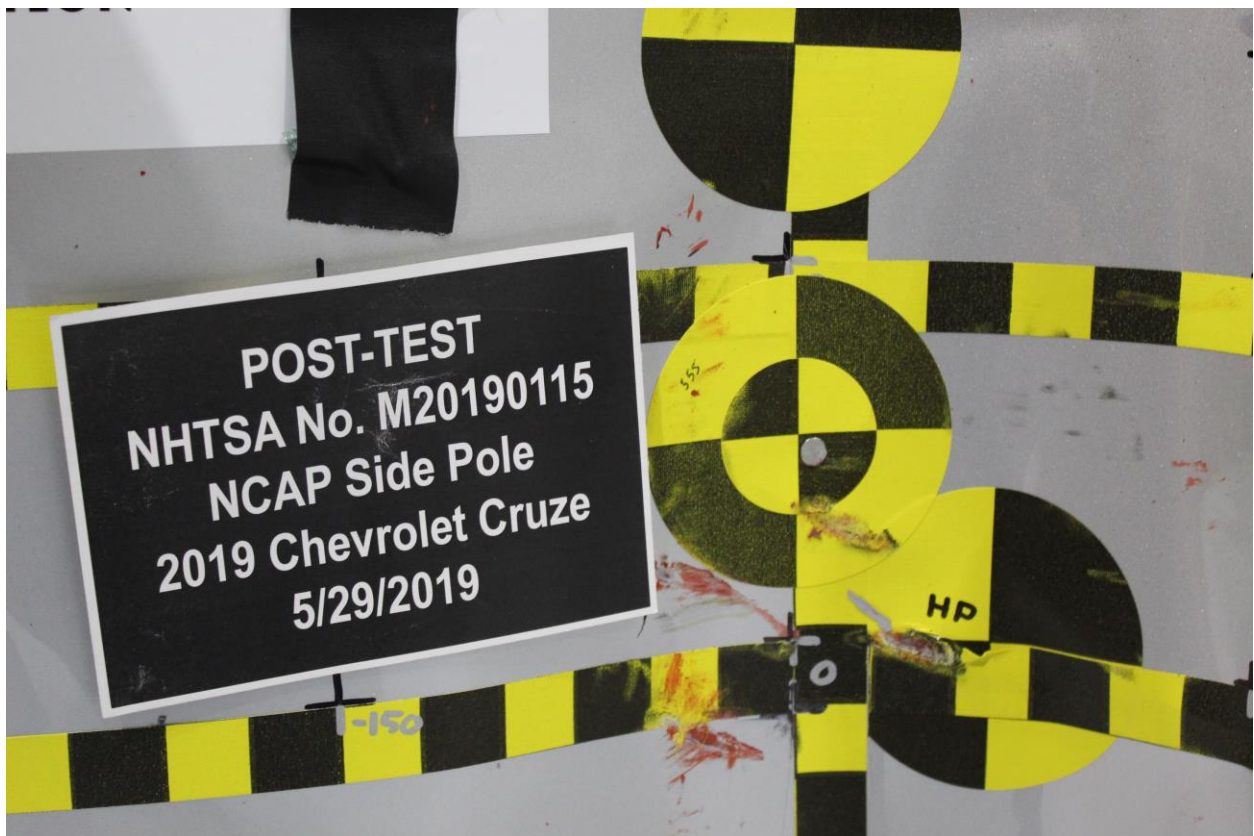


Figure A-20: Post-Test Close-Up View of Impact Point Target Showing Impact Location





**Figure A-21: Pre-Test Front Close-Up View of Dummy Head and Chest**

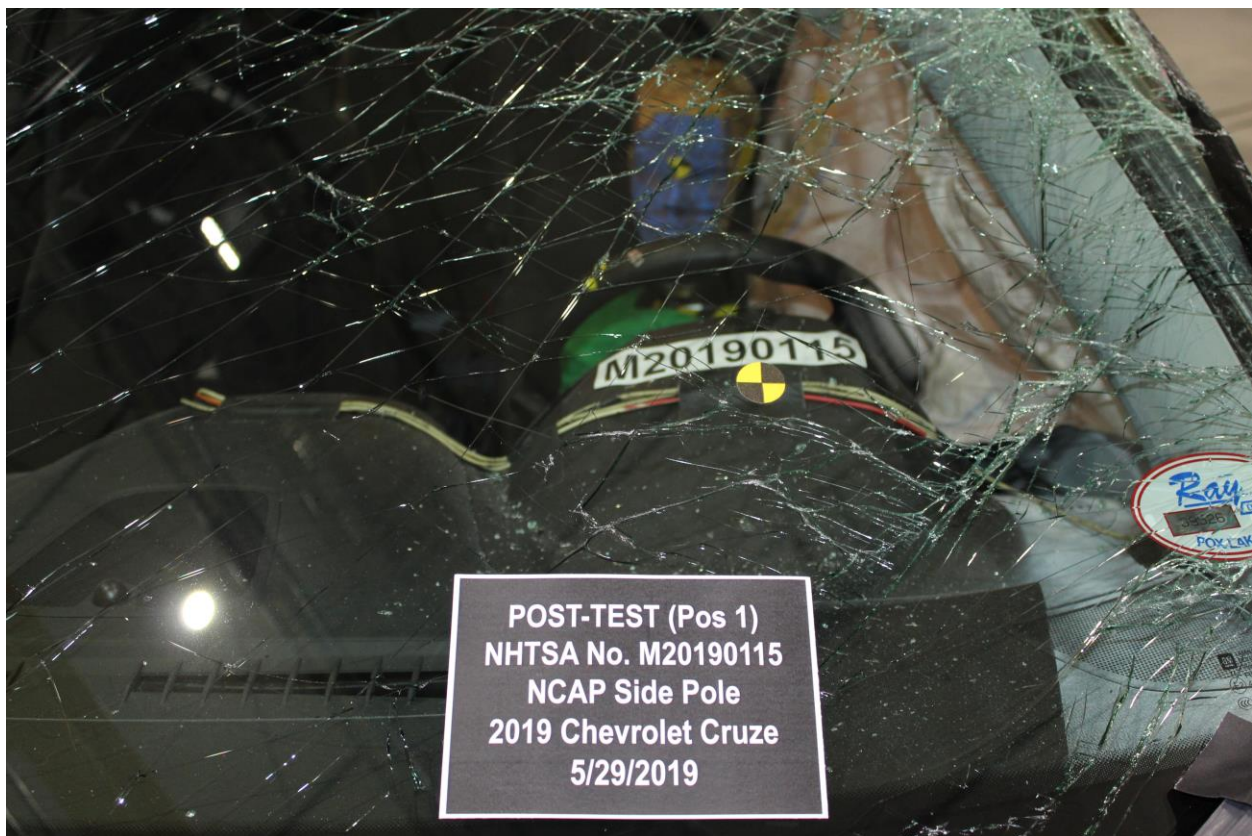

**Figure A-22: Post-Test Front Close-Up View of Dummy**





**Figure A-23: Pre-Test Left Side View of Dummy Showing Belt and Chalking**




**Figure A-24: Pre-Test Left Side View of Dummy Shoulder and Door Top View**





**Figure A-25: Post-Test Left Side View of Dummy Shoulder and Door Top View**

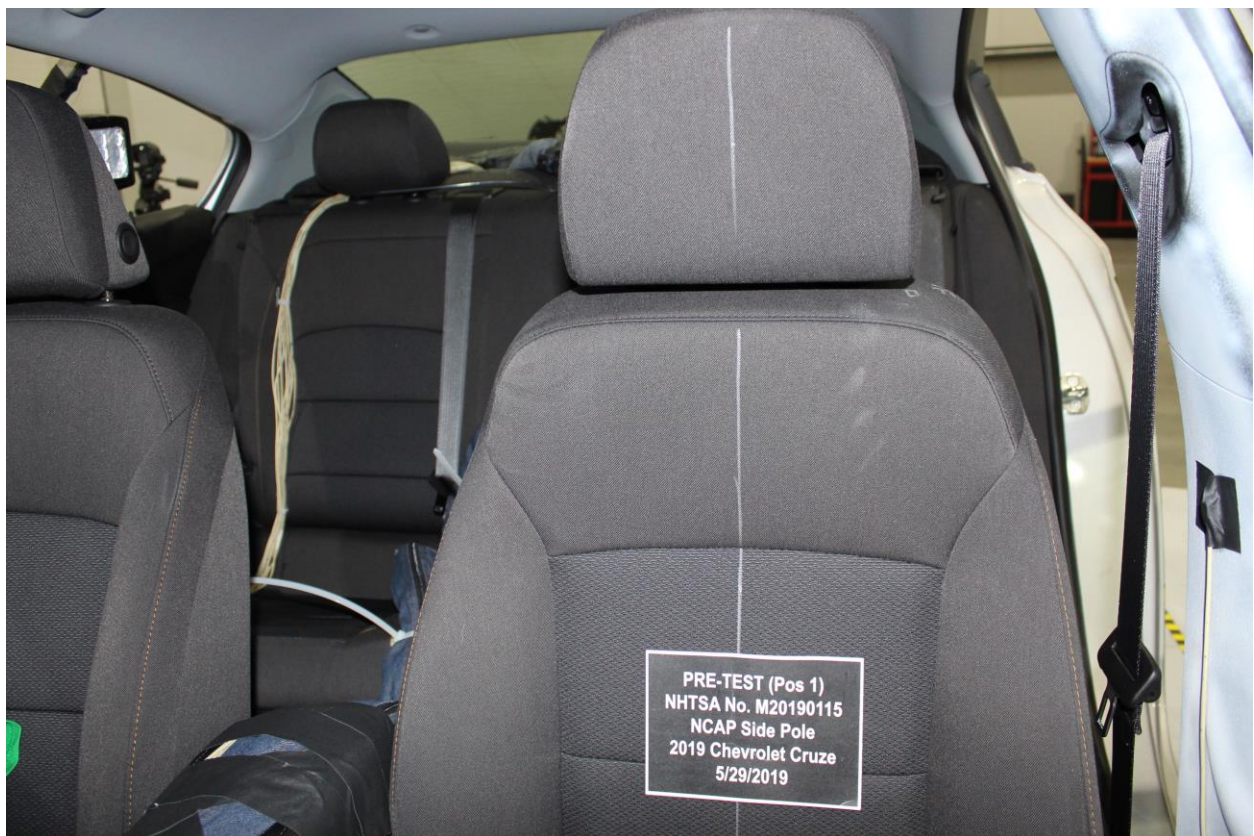

**Figure A-26: Pre-Test Frontal View of Seat Back Prior to Dummy Positioning**





**Figure A-27: Pre-Test Frontal Close-Up View of Dummy Head / Shoulders in Relation to Head Restraint**



**Figure A-28: Pre-Test Frontal View of Seat Pan Prior to Dummy Positioning**





**Figure A-29: Pre-Test Overhead View of Dummy Thighs on Seat Pan**



**Figure A-30: Pre-Test Left Side View of Dummy's Neck Showing Position of Adjustable Neck Bracket**



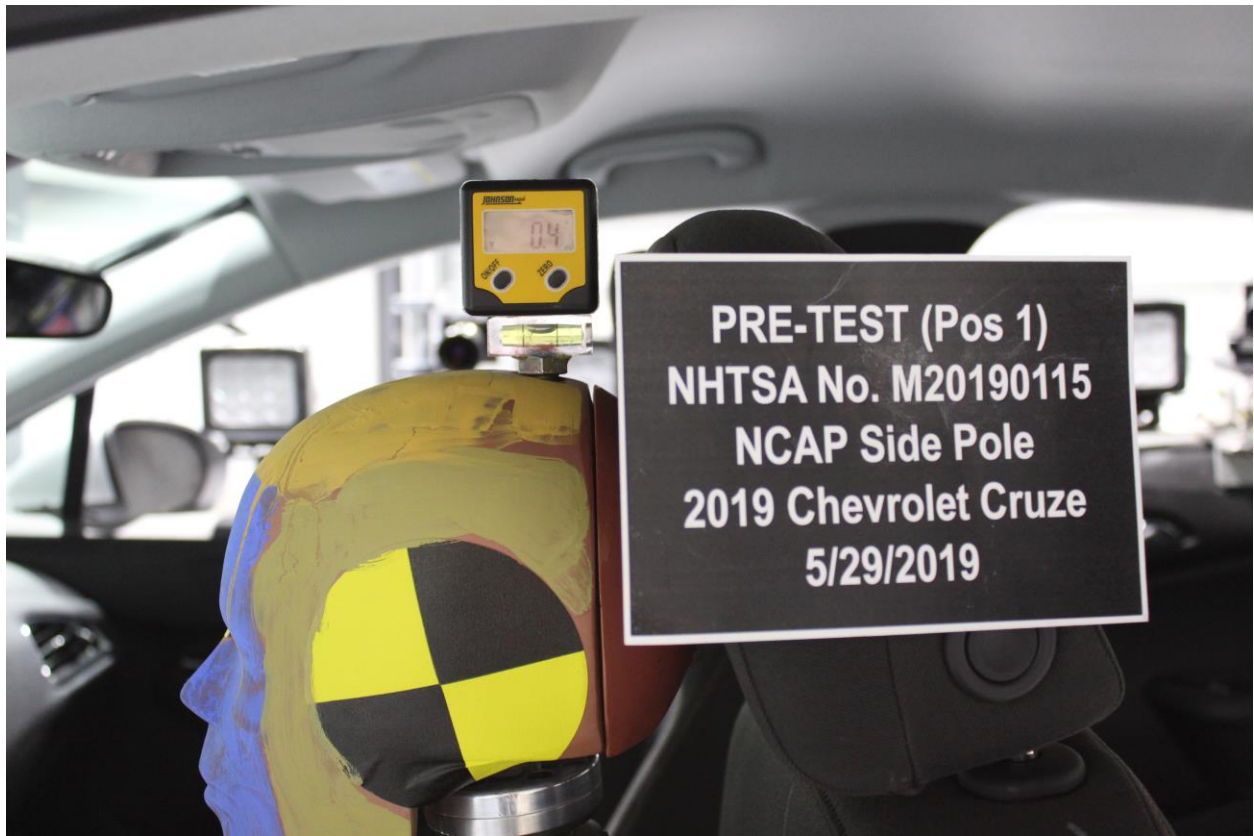


Figure A-31: Pre-Test Left Side View of Dummy's Head Showing Dummy's Head is Level



Figure A-32: Pre-Test Placement of Dummy's Feet



**Figure A-33: Pre-Test View of Belt Anchorage for Dummy**



**Figure A-34: Pre-Test Left Side View of Steering Wheel**





**Figure A-35: Pre-Test View of Disengaged Parking Brake**



**Figure A-36: Pre-Test View of Parking Brake**





Figure A-37: Pre-Test Close-Up Left Side View of Driver Seat Track

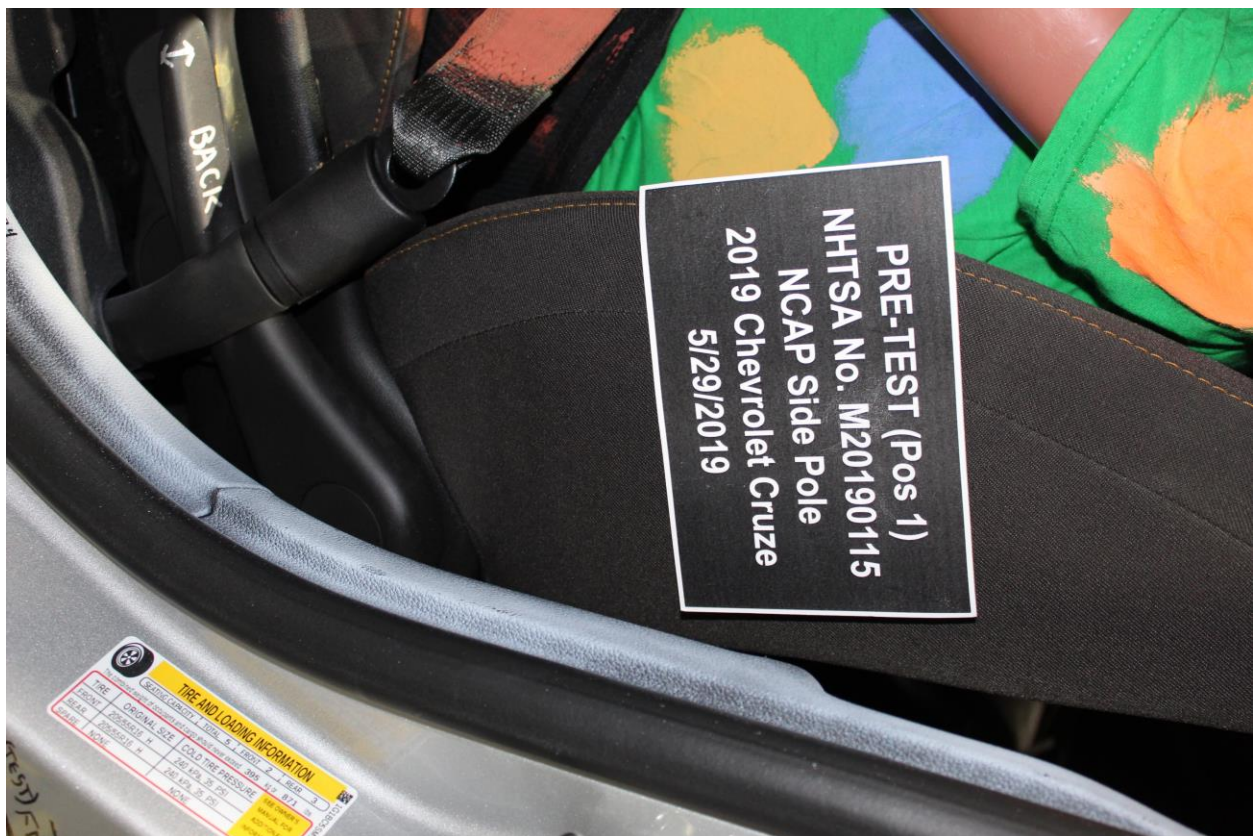


Figure A-38: Pre-Test Close-Up Left Side View of Driver Seat Back



**Figure A-39: Pre-Test Close-Up View of Driver Seat Back or Head Restraint**



**Figure A-40: Pre-Test Dummy and Door Clearance View**





**Figure A-41: Post-Test Dummy and Door Clearance View**



**Figure A-42: Pre-Test Right Side View of Dummy and Front Seat of Occupant Compartment**





**Figure A-43: Post-Test Right Side View of Dummy and Front Seat of Occupant Compartment**



**Figure A-44: Pre-Test Inner Door Panel View**



**Figure A-45: Post-Test Inner Door Panel View Showing Dummy Contact Location**

**Photo Not Applicable**

**Figure A-46: Post-Test Dummy Close-Up Head Contact with Vehicle Interior View**





**Figure A-47: Post-Test Dummy Close-Up Head Contact with Side Airbag View**



**Figure A-48: Post-Test Dummy Close-Up Torso Contact with Vehicle Interior View**






**Figure A-49: Post-Test Dummy Close-Up Torso Contact with Side Airbag View**




**Figure A-50: Post-Test Dummy Close-Up Pelvis Contact with Vehicle Interior View**



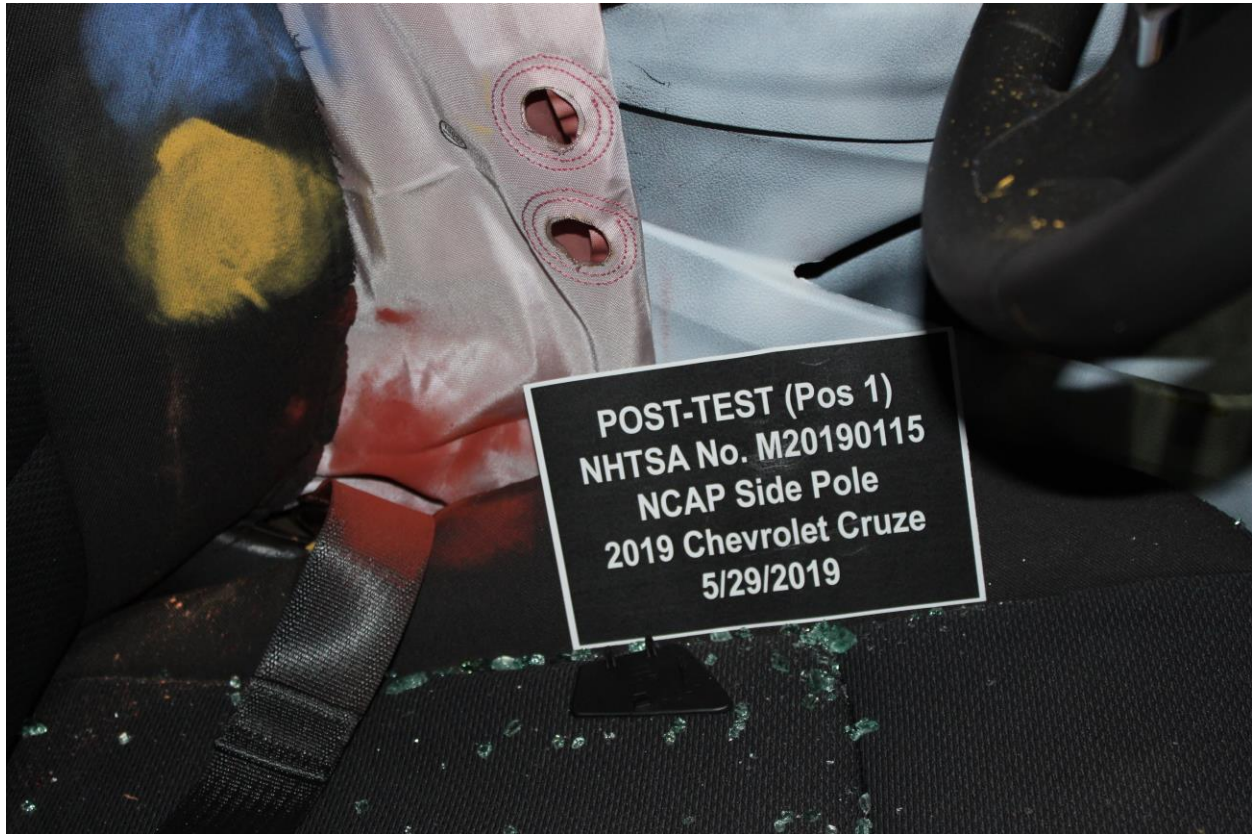

**Figure A-51: Post-Test Dummy Close-Up Pelvis Contact with Side Airbag View**

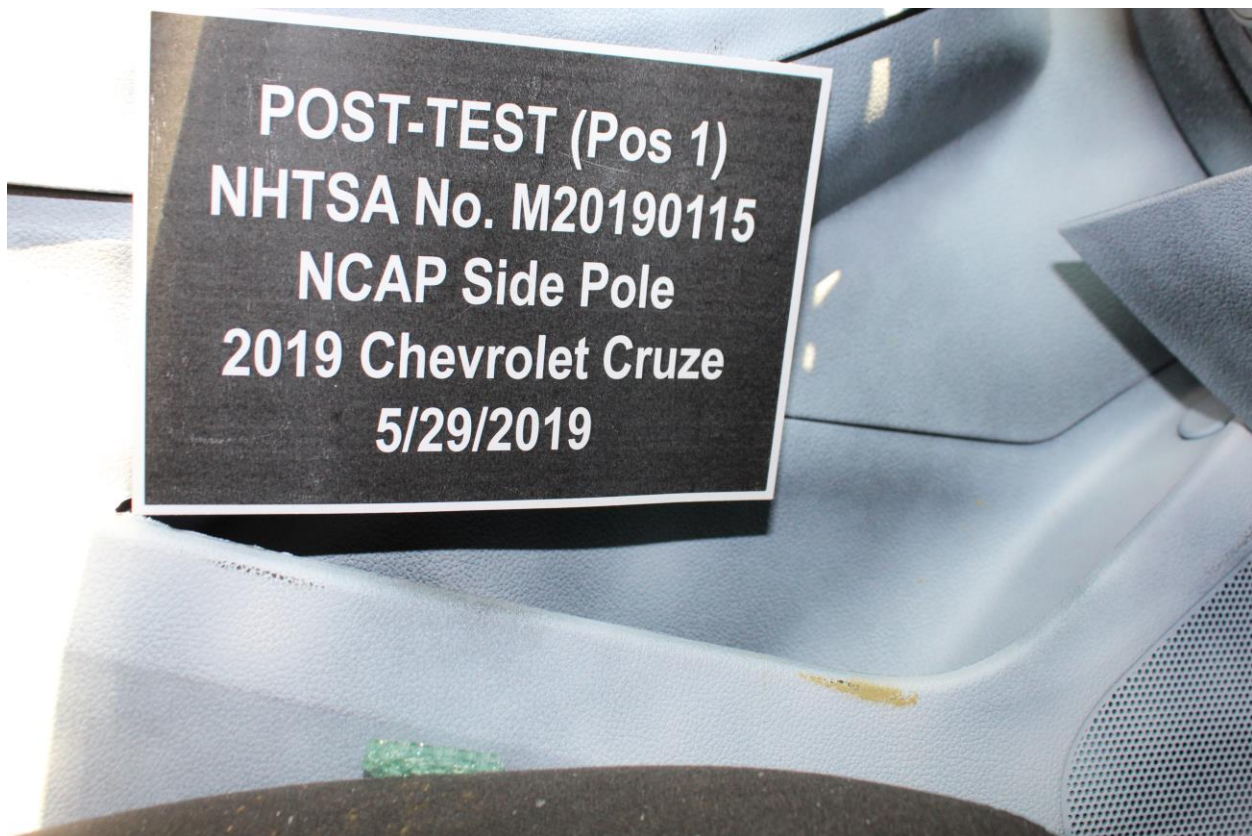

**Figure A-52: Post-Test Dummy Close-Up Knee Contact with Vehicle Interior View**



**Figure A-53: Pre-Test View of Fuel Filler Cap or Fuel Filler Neck**



**Figure A-54: Post-Test View of Fuel Filler Cap or Fuel Filler Neck**



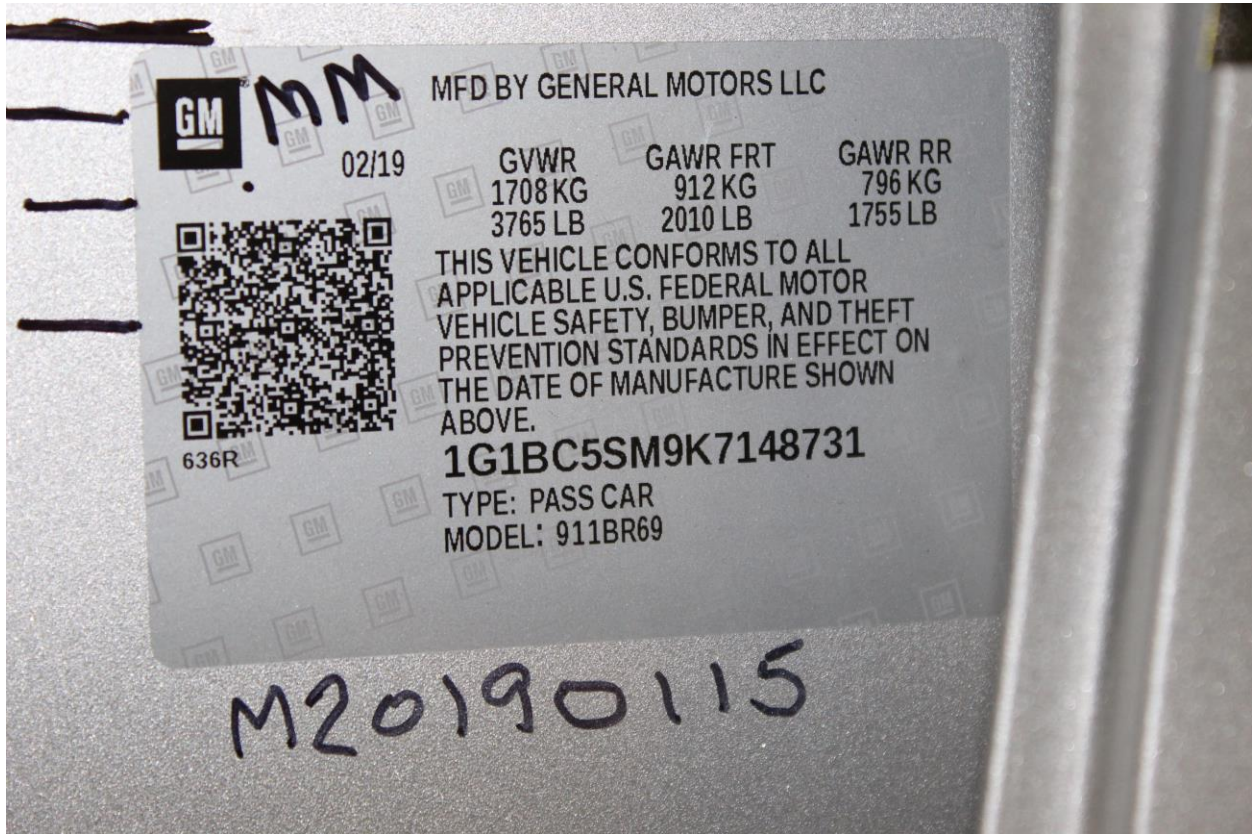


Figure A-55: Close-Up View of Vehicle's Certification Label

# Photo Not Applicable

Figure A-55a: Close-Up View of Reduced Load Capacity Label



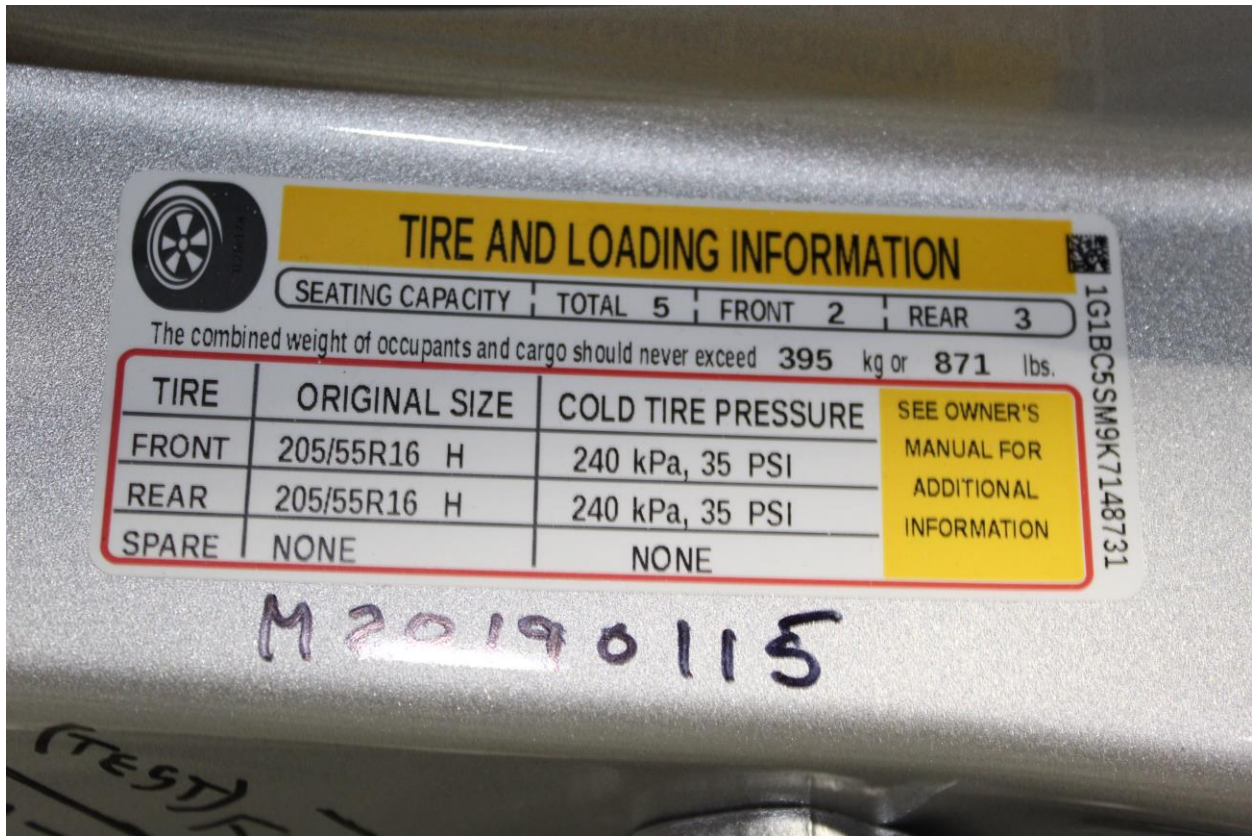


Figure A-56: Close-Up View of Vehicle's Tire Information Placard or Label



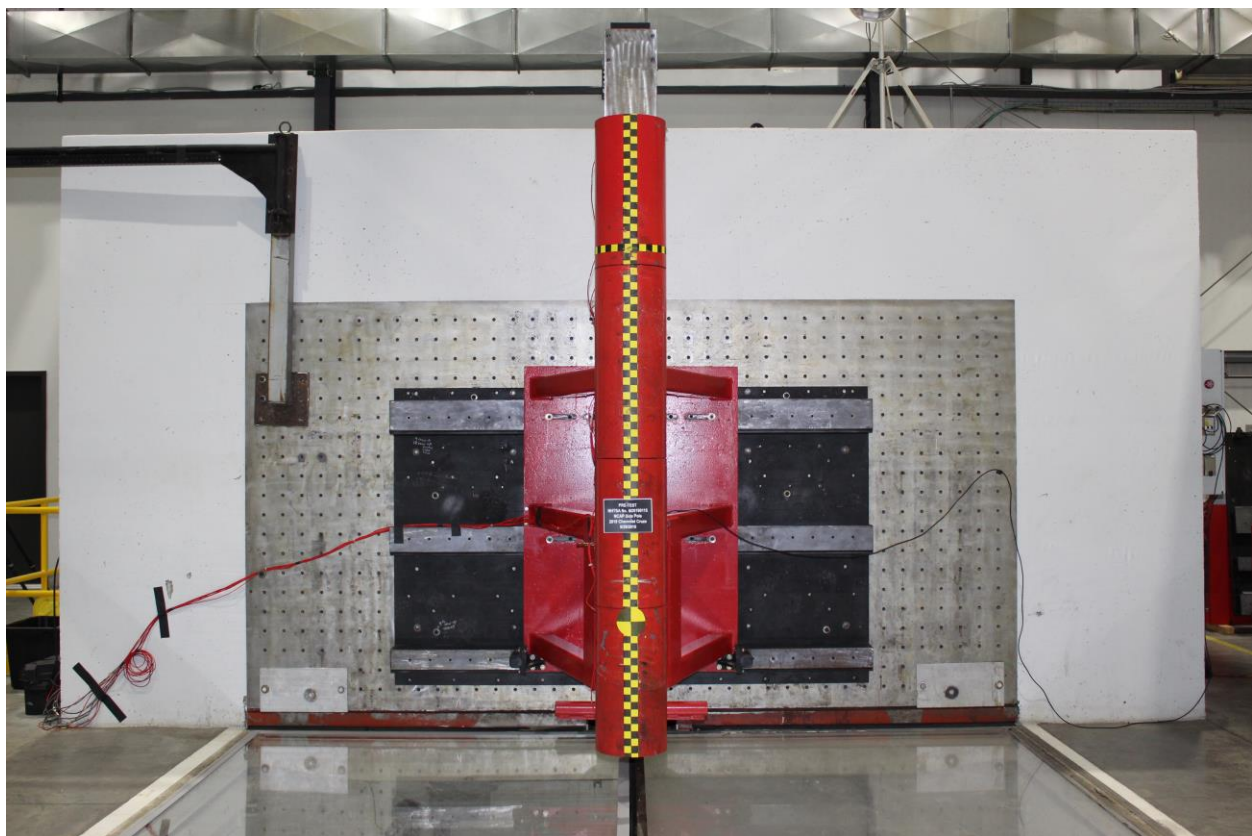


Figure A-57: Pre-Test Pole Barrier Front View

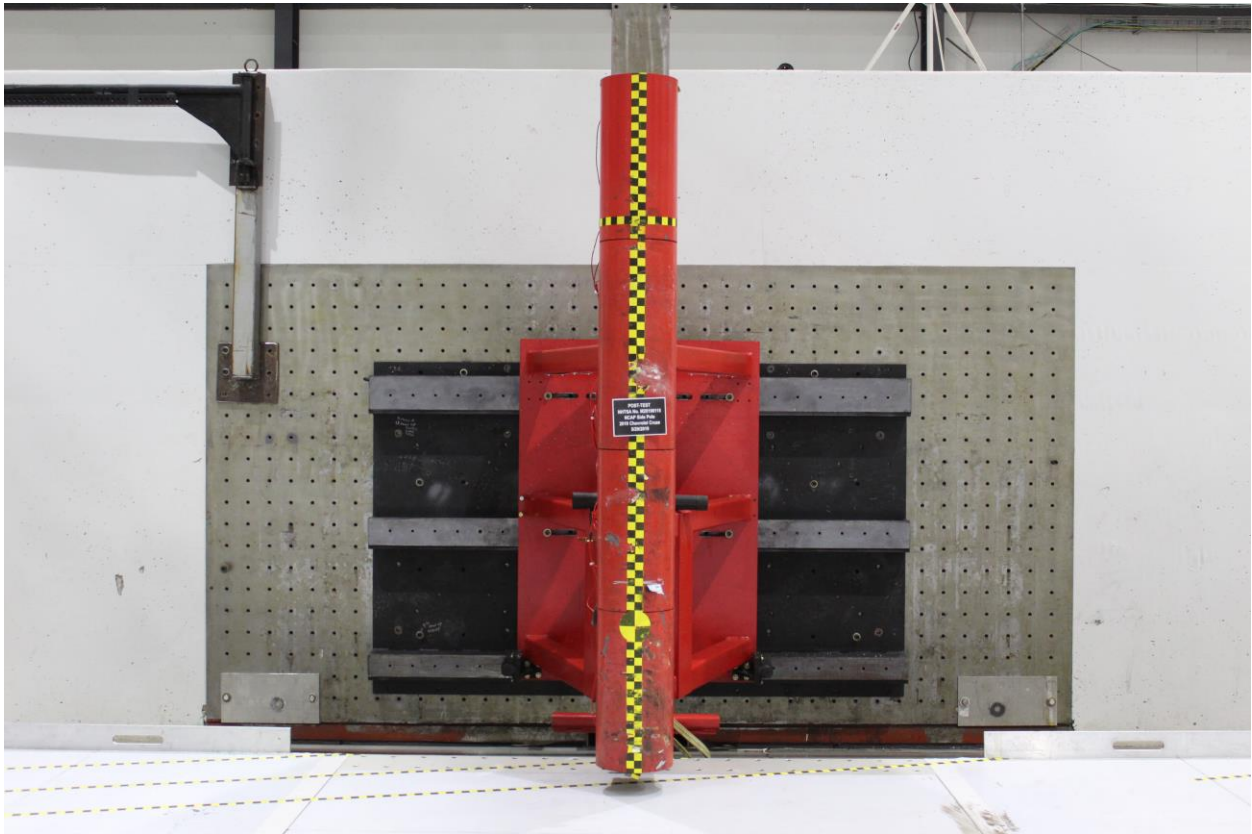


**Figure A-58: Post-Test Pole Barrier Front View**

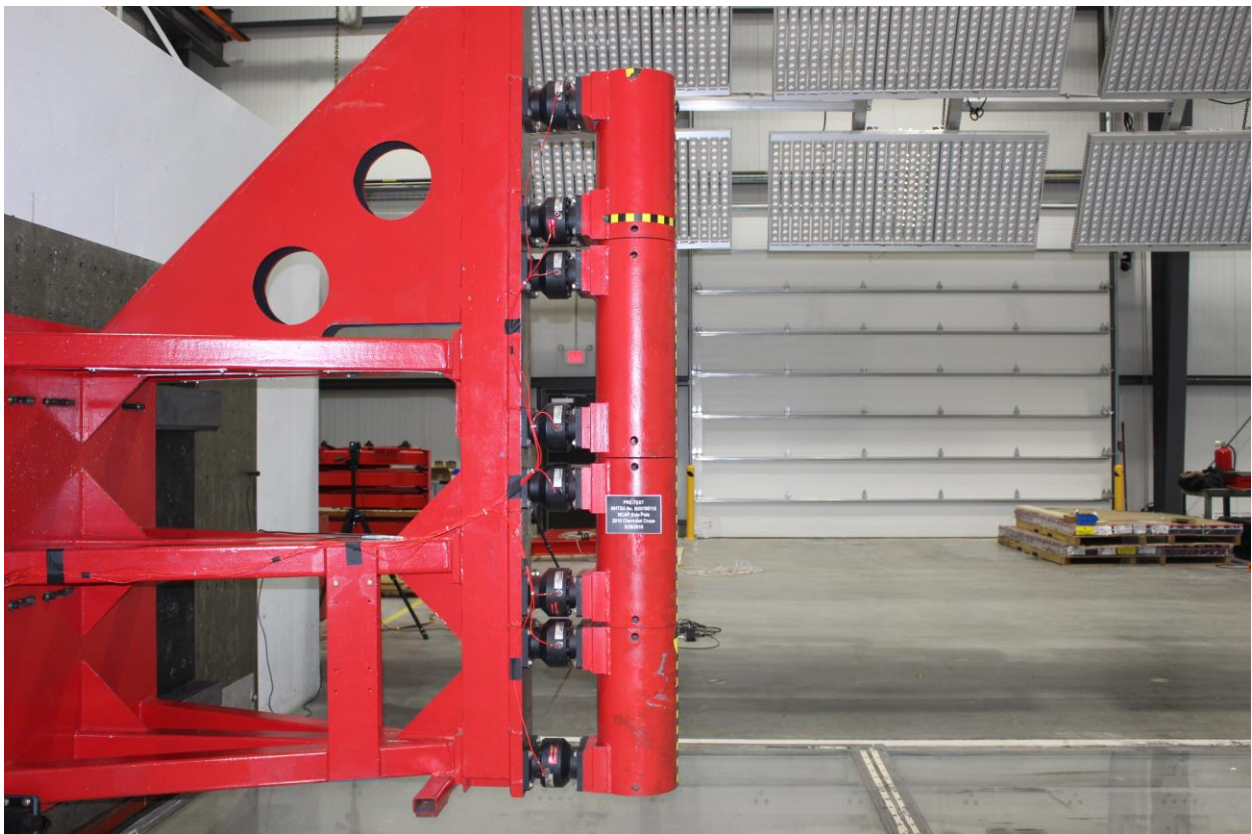


**Figure A-59: Pre-Test Pole Barrier Side View**



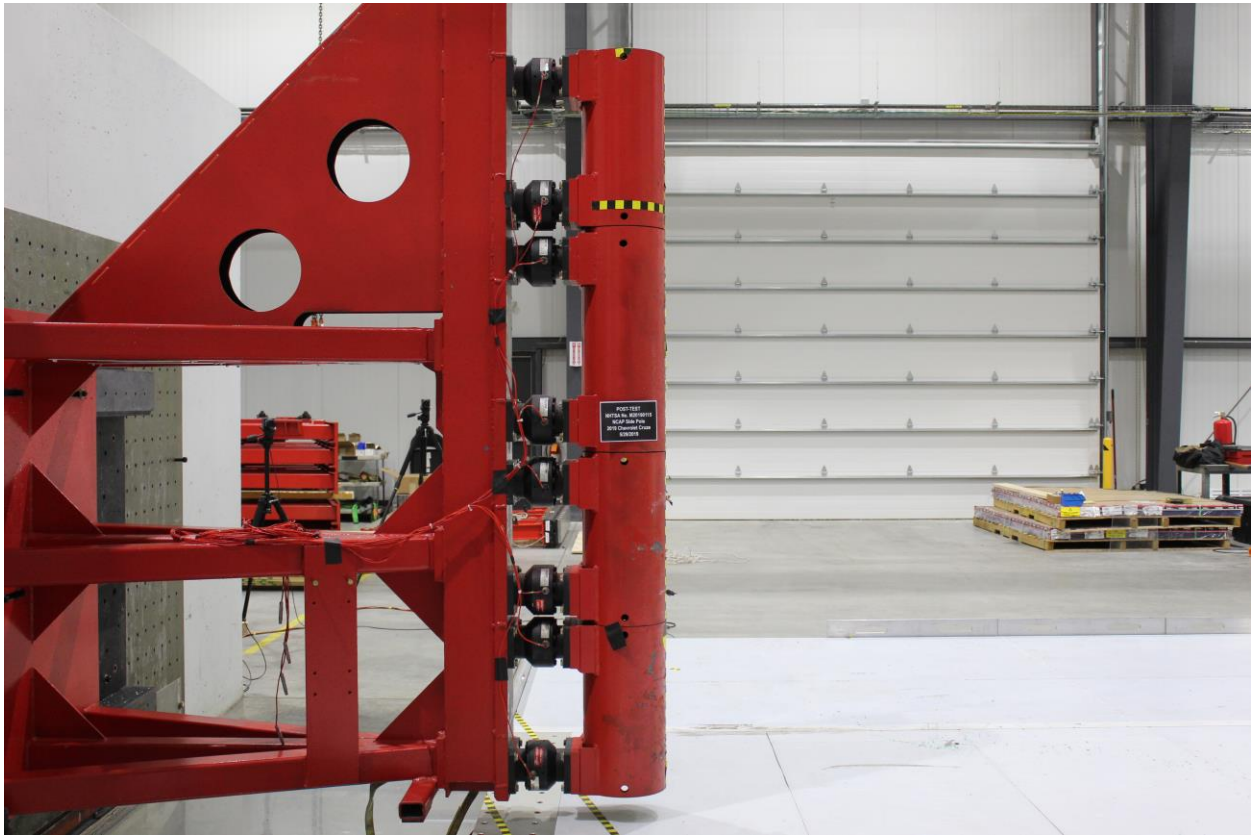

**Figure A-60: Post-Test Pole Barrier Side View**

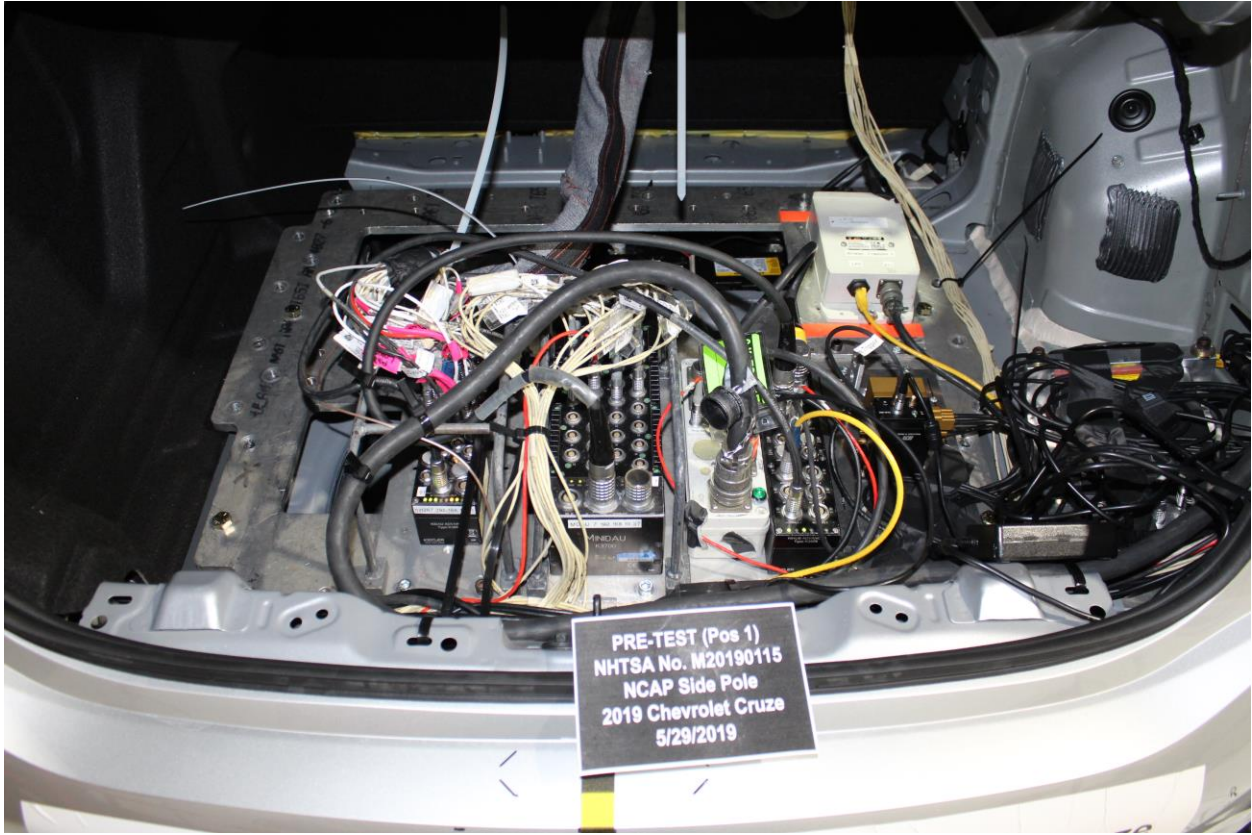

**Figure A-61: Pre-Test Ballast View**



Figure A-62: Post-Test Primary and Redundant Speed Trap Read-Out

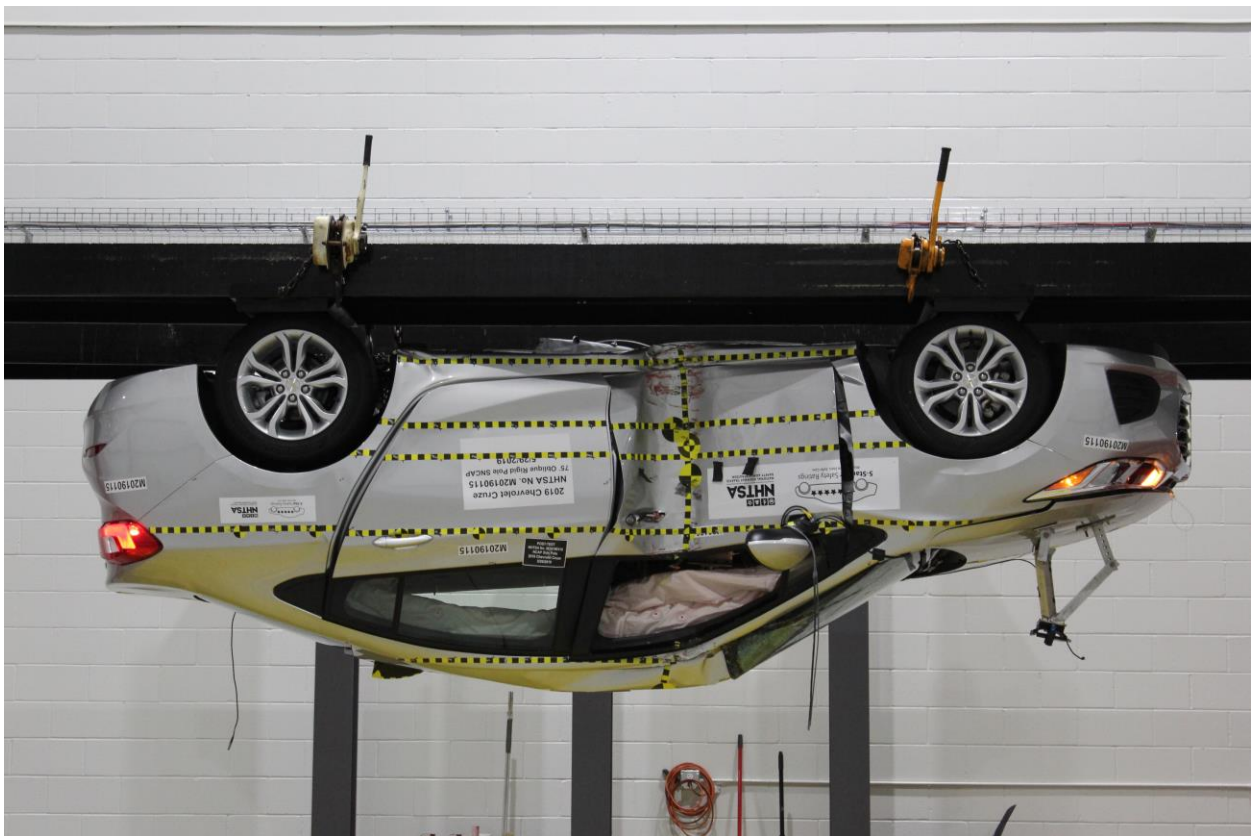


Figure A-63: FMVSS No. 301 Static Rollover 0 Degrees






**Figure A-64: FMVSS No. 301 Static Rollover 90 Degrees**



**Figure A-65: FMVSS No. 301 Static Rollover 180 Degrees**

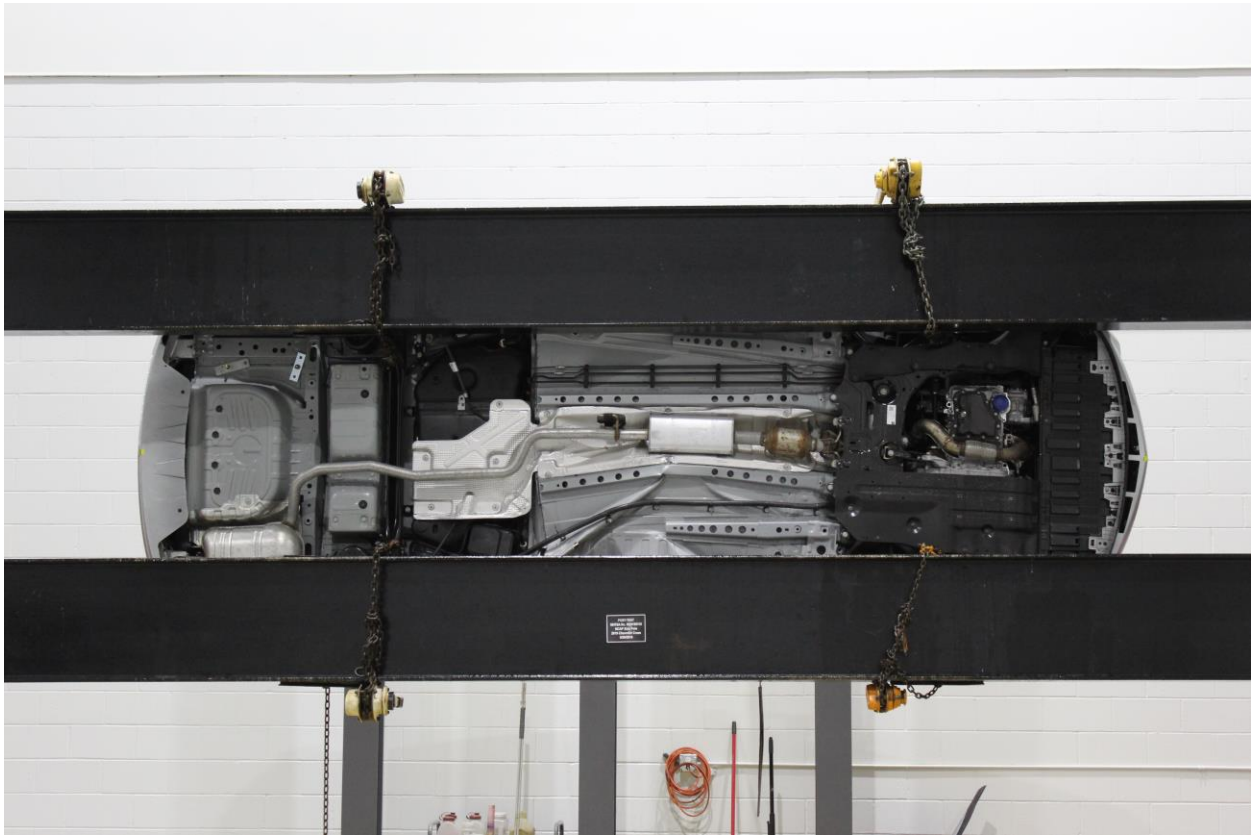

**Figure A-66: FMVSS No. 301 Static Rollover 270 Degrees**



**Figure A-67: FMVSS No. 301 Static Rollover 360 Degrees**





Figure A-68: Impact Event

**CHEVROLET**

**2019 CRUZE 4-DOOR SEDAN LS AUTOMATIC**

**EXTERIOR: SILVER ICE METALLIC**

**INTERIOR: JET BLACK**

**ENGINE, TURBO 1.4L VARIABLE TRANSMISSION, 6-SPD AUTOMATIC**

Visit us at [www.chevy.com](http://www.chevy.com)

<p><b>STANDARD EQUIPMENT</b></p> <p><small>ITEMS HIGHLIGHTED BELOW ARE INCLUDED AT NO EXTRA CHARGE IN THE STANDARD VEHICLE PRICE SHOWN.</small></p> <ul style="list-style-type: none"> <li>• CHEVROLET COMPLETE CARE</li> <li>• SEE <a href="http://WWW.CHEVY.COM">WWW.CHEVY.COM</a> OR DEALER FOR TERMS, DETAILS &amp; LIMITS</li> <li>• FIRST MAINTENANCE VISIT</li> <li>• OIL CHANGE, TIRE ROTATION</li> <li>• MULTI-POINT INSPECTION</li> <li>• 3 YR/36,000 MILES BUMPER-TO-BUMPER WARRANTY</li> <li>• 5 YR/ 60,000 MILES POWERTRAIN LIMITED WARRANTY</li> <li>• ROADSIDE ASSISTANCE</li> <li>• COURTESY TRANSPORTATION</li> </ul> <p><b>MECHANICAL</b></p> <ul style="list-style-type: none"> <li>• BRAKES, 4-WHL. DISC(DRUM/ALF)</li> <li>• ENG. CONTROL STOP/START SYS</li> <li>• ENGINE, TURBO 1.4L VARIABLE VALVE TIMING DOHC 4-CYLINDER</li> <li>• 6-SPD AUTOMATIC TRANSMISSION</li> <li>• TIRE SEALANT &amp; INFLATOR KIT IN PLACE OF SPARE TIRE</li> </ul>	<p><b>SAFETY &amp; SECURITY</b></p> <ul style="list-style-type: none"> <li>• AIRBAGS, FRONTAL AND KNEE FOR DRIVER AND FRONT PASSENGER; SIDE-IMPACT &amp; HEAD-CURTAIN FOR OUTBOARD SEATING POSITIONS (110)</li> <li>• REMOTE PANIC ALARM</li> <li>• STABILITRAK® STABILITY SYSTEM W/ TRACTION CONTROL</li> <li>• TIRE PRESSURE MONITOR</li> <li>• REAR VISION CAMERA</li> </ul> <p><b>EXTERIOR</b></p> <ul style="list-style-type: none"> <li>• POWER DOOR LOCKS</li> <li>• MIRRORS, OUTSIDE, PWR-ADJUST</li> <li>• MANUAL, FOLDING</li> <li>• WHEELS, 15" STEEL</li> <li>• HEADLAMPS, AUTOMATIC</li> </ul> <p><b>INTERIOR</b></p> <ul style="list-style-type: none"> <li>• FRONT BUCKET SEATS</li> <li>• POWER WINDOWS, DRIVER &amp; PASSENGER EXPRESS DOWN</li> <li>• SEAT ADJUSTER, DRIVER, 6-WAY</li> </ul>	<p><b>MANUAL</b></p> <ul style="list-style-type: none"> <li>• REAR SEAT, FOLDING</li> <li>• FRONT FLOOR MATS</li> <li>• AIR CONDITIONING</li> <li>• CONSOLE, FLOOR, WITH ARMREST</li> <li>• VISORS, DRIVER/FRONT PASSENGER W/ WANTED MIRRORS</li> <li>• STEERING COLUMN, TILT &amp; TELESCOPIC</li> <li>• AUDIO SYSTEM, 4-SPEAKER</li> <li>• USB PORTS, 2, W/ AUX JACK</li> <li>• TRUNK RELEASE, POWER</li> </ul> <p><b>CONNECTIVITY FEATURES</b></p> <ul style="list-style-type: none"> <li>• CHEVROLET INFOTAINMENT 3.7" DIAG COLOR TOUCHSCREEN</li> <li>• ADDITIONAL FEATURES FOR COMPATIBLE PHONES INCLUDE: BLUETOOTH AUDIO STREAMING, VOICE COMMAND PASSTHROUGH TO PHONE, ANDROID AUTO &amp; APPLE CARPLAY CAPABLE</li> <li>• TEEN DRIVER</li> </ul>	<p><b>ONSTAR (R) SERVICES CAPABLE (SUBJECT TO TERMS SEE ONSTAR.COM)</b></p> <ul style="list-style-type: none"> <li>• 4G LTE W/FI (R) HOTSPOT CAPABLE (SUBJECT TO TERMS SEE ONSTAR.COM)</li> </ul> <p><b>OPTIONS &amp; PRICING</b></p> <p style="text-align: center; font-size: small;">MANUFACTURER'S SUGGESTED RETAIL PRICE</p> <table style="width: 100%; border-collapse: collapse;"> <tr> <td style="border: 1px solid black;"><b>STANDARD VEHICLE PRICE</b></td> <td style="border: 1px solid black; text-align: right;"><b>\$19,120.00</b></td> </tr> <tr> <td colspan="2" style="font-size: x-small;">OPTIONS INSTALLED BY THE MANUFACTURER (MAY REPLACE STANDARD EQUIPMENT ITEMS)</td> </tr> <tr> <td style="border: 1px solid black;">LS CONVENIENCE PACKAGE</td> <td style="border: 1px solid black; text-align: right;">1,000.00</td> </tr> <tr> <td style="border: 1px solid black;">• REMOTE VEHICLE START</td> <td style="border: 1px solid black;"></td> </tr> <tr> <td style="border: 1px solid black;">• CRUISE CONTROL</td> <td style="border: 1px solid black;"></td> </tr> <tr> <td style="border: 1px solid black;">• WHEELS 16" ALUMINUM</td> <td style="border: 1px solid black;"></td> </tr> <tr> <td style="border: 1px solid black;">• STEERING WHEEL CONTROLS</td> <td style="border: 1px solid black;"></td> </tr> <tr> <td style="border: 1px solid black;">• REDUCED TRAVEL POWER STEERING</td> <td style="border: 1px solid black;"></td> </tr> <tr> <td style="border: 1px solid black;"><b>TOTAL OPTIONS</b></td> <td style="border: 1px solid black; text-align: right;"><b>\$1,000.00</b></td> </tr> <tr> <td style="border: 1px solid black;"><b>TOTAL VEHICLE &amp; OPTIONS</b></td> <td style="border: 1px solid black; text-align: right;"><b>\$20,120.00</b></td> </tr> </table>	<b>STANDARD VEHICLE PRICE</b>	<b>\$19,120.00</b>	OPTIONS INSTALLED BY THE MANUFACTURER (MAY REPLACE STANDARD EQUIPMENT ITEMS)		LS CONVENIENCE PACKAGE	1,000.00	• REMOTE VEHICLE START		• CRUISE CONTROL		• WHEELS 16" ALUMINUM		• STEERING WHEEL CONTROLS		• REDUCED TRAVEL POWER STEERING		<b>TOTAL OPTIONS</b>	<b>\$1,000.00</b>	<b>TOTAL VEHICLE &amp; OPTIONS</b>	<b>\$20,120.00</b>												
<b>STANDARD VEHICLE PRICE</b>	<b>\$19,120.00</b>																																		
OPTIONS INSTALLED BY THE MANUFACTURER (MAY REPLACE STANDARD EQUIPMENT ITEMS)																																			
LS CONVENIENCE PACKAGE	1,000.00																																		
• REMOTE VEHICLE START																																			
• CRUISE CONTROL																																			
• WHEELS 16" ALUMINUM																																			
• STEERING WHEEL CONTROLS																																			
• REDUCED TRAVEL POWER STEERING																																			
<b>TOTAL OPTIONS</b>	<b>\$1,000.00</b>																																		
<b>TOTAL VEHICLE &amp; OPTIONS</b>	<b>\$20,120.00</b>																																		
<p><b>EPA DOT Fuel Economy and Environment</b></p> <p style="text-align: right; font-size: small;">Gasoline Vehicle</p> <table style="width: 100%; border-collapse: collapse;"> <tr> <td style="text-align: center;"> <p><b>Fuel Economy</b></p> <p style="font-size: x-large; font-weight: bold;">32 MPG</p> <p style="font-size: x-small;">combined city/hwy</p> </td> <td style="text-align: center;"> <p style="font-size: x-small;">City</p> <p style="font-size: x-large; font-weight: bold;">28 MPG</p> <p style="font-size: x-small;">City</p> </td> <td style="text-align: center;"> <p style="font-size: x-small;">Highway</p> <p style="font-size: x-large; font-weight: bold;">38 MPG</p> <p style="font-size: x-small;">Highway</p> </td> </tr> <tr> <td colspan="3" style="text-align: center;"> <p><b>3.1</b> gallons per 100 miles</p> </td> </tr> </table> <p style="text-align: center; font-weight: bold; font-size: large;">You save \$1,000 in fuel costs over 5 years compared to the average new vehicle.</p>		<p><b>Fuel Economy</b></p> <p style="font-size: x-large; font-weight: bold;">32 MPG</p> <p style="font-size: x-small;">combined city/hwy</p>	<p style="font-size: x-small;">City</p> <p style="font-size: x-large; font-weight: bold;">28 MPG</p> <p style="font-size: x-small;">City</p>	<p style="font-size: x-small;">Highway</p> <p style="font-size: x-large; font-weight: bold;">38 MPG</p> <p style="font-size: x-small;">Highway</p>	<p><b>3.1</b> gallons per 100 miles</p>			<p><b>GOVERNMENT 5-STAR SAFETY RATINGS</b></p> <p><b>Overall Vehicle Score</b> Not Rated</p> <p style="font-size: x-small;">Based on the combined ratings of frontal, side and rollover. Should ONLY be compared to other vehicles of similar size and weight.</p> <table style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 25%;"><b>Frontal Crash</b></td> <td style="width: 25%;">Driver Passenger</td> <td style="width: 25%;">★★★★★</td> <td style="width: 25%;">★★★★★</td> </tr> <tr> <td colspan="4" style="font-size: x-small;">Based on the risk of injury in a frontal impact. Should ONLY be compared to other vehicles of similar size and weight.</td> </tr> <tr> <td style="width: 25%;"><b>Side Crash</b></td> <td style="width: 25%;">Front seat Rear seat</td> <td style="width: 25%;">Not Rated</td> <td style="width: 25%;">Not Rated</td> </tr> <tr> <td colspan="4" style="font-size: x-small;">Based on the risk of injury in a side impact.</td> </tr> <tr> <td style="width: 25%;"><b>Rollover</b></td> <td colspan="3" style="text-align: center;">★★★★★</td> </tr> <tr> <td colspan="4" style="font-size: x-small;">Based on the risk of rollover in a single-vehicle crash.</td> </tr> </table> <p style="font-size: x-small;">Star ratings range from 1 to 5 stars (★★★★★) with 5 being the highest. Source: National Highway Traffic Safety Administration (NHTSA) <a href="http://www.safercar.gov">www.safercar.gov</a> or 1-800-327-4236</p>		<b>Frontal Crash</b>	Driver Passenger	★★★★★	★★★★★	Based on the risk of injury in a frontal impact. Should ONLY be compared to other vehicles of similar size and weight.				<b>Side Crash</b>	Front seat Rear seat	Not Rated	Not Rated	Based on the risk of injury in a side impact.				<b>Rollover</b>	★★★★★			Based on the risk of rollover in a single-vehicle crash.				<p><b>PARTS CONTENT INFORMATION</b></p> <p style="font-size: x-small;">This label has been applied pursuant to Federal law. Do not remove prior to delivery to the ultimate purchaser. Includes Manufacturer's Recommended Pre-Delivery Service. Does not include dealer-installed options and accessories not listed above. Read owner's manual for details.</p> <p><b>FOR VEHICLES IN THIS CARLINE:</b> U.S./CANADIAN PARTS CONTENT: 53% MAJOR SOURCES OF FOREIGN PARTS CONTENT: MEXICO 28%</p> <p style="font-size: x-small;">NOTE: PARTS CONTENT DOES NOT INCLUDE FINAL ASSEMBLY, DISTRIBUTION, OR OTHER NON-PARTS COSTS.</p> <p><b>FOR THIS VEHICLE:</b> FINAL ASSEMBLY POINT: LORDSTOWN, OH U.S.A. COUNTRY OF ORIGIN: U.S.A. ENGINE: UNITED STATES TRANSMISSION: UNITED STATES</p> <p style="font-size: x-small;">© 2018 General Motors LLC GM, Buick, Pontiac, Oldsmobile, Cadillac</p>	
<p><b>Fuel Economy</b></p> <p style="font-size: x-large; font-weight: bold;">32 MPG</p> <p style="font-size: x-small;">combined city/hwy</p>	<p style="font-size: x-small;">City</p> <p style="font-size: x-large; font-weight: bold;">28 MPG</p> <p style="font-size: x-small;">City</p>	<p style="font-size: x-small;">Highway</p> <p style="font-size: x-large; font-weight: bold;">38 MPG</p> <p style="font-size: x-small;">Highway</p>																																	
<p><b>3.1</b> gallons per 100 miles</p>																																			
<b>Frontal Crash</b>	Driver Passenger	★★★★★	★★★★★																																
Based on the risk of injury in a frontal impact. Should ONLY be compared to other vehicles of similar size and weight.																																			
<b>Side Crash</b>	Front seat Rear seat	Not Rated	Not Rated																																
Based on the risk of injury in a side impact.																																			
<b>Rollover</b>	★★★★★																																		
Based on the risk of rollover in a single-vehicle crash.																																			
<p><b>Annual fuel cost \$1,200</b></p> <p style="font-size: x-small;">This vehicle emits 277 grams CO<sub>2</sub> per mile. The best emits 0 grams per mile (tailpipe only). Producing and distributing fuel also creates emissions. Learn more at <a href="http://fuelconomy.gov">fuelconomy.gov</a>.</p> <p><b>Fuel Economy &amp; Greenhouse Gas Rating</b> (tailpipe only)</p> <p style="text-align: center; font-size: large; font-weight: bold;">7</p> <p style="font-size: x-small;">Best 10 Worst</p> <p><b>Smog Rating</b> (tailpipe only)</p> <p style="text-align: center; font-size: large; font-weight: bold;">6</p> <p style="font-size: x-small;">Best 10 Worst</p> <p style="font-size: x-small;">Actual results will vary for many reasons, including driving conditions and how you drive and maintain your vehicle. The average new vehicle gets 27 MPG and costs \$1,200 to fuel over 5 years. Cost estimates are based on 15,000 miles per year at \$2.55 per gallon. MPGe is miles per gasoline gallon equivalent. Vehicle emissions are a significant cause of climate change and smog.</p> <p><b>fuelconomy.gov</b></p> <p style="font-size: x-small;">Calculate personalized estimates and compare vehicles</p>		<p><b>Equipped with the safety and security of OnStar.</b></p> <p>Visit <a href="http://onstar.com">onstar.com</a> for details.</p> <p><a href="http://www.onstar.com">www.onstar.com</a></p>		<p style="font-size: x-small;">ORDER NO 19P086 SALES CODE E SALES MODEL CODE 19P08 DEALER NO 47058 FINAL ASSEMBLY: LORDSTOWN, OH U.S.A. VIN 1G1BC55M6K7148731</p> <p>DEALER TO WHOM DELIVERED <b>FRANK BOUCHER CHEVROLET</b> PO BOX 685270 RACINE, WI 53408-5570</p> <p style="font-size: x-small;">10A3150147</p>																															

Figure A-69: Monroney Label



### Head Restraints


The vehicle's front and rear seats have adjustable head restraints in the outboard seating positions.

**Warning**

With head restraints that are not installed and adjusted properly, there is a greater chance that occupants will suffer a neck/spinal injury in a crash. Do not drive until the head restraints for all occupants are installed and adjusted properly.



Adjust the head restraint so that the top of the restraint is at the same height as the top of the occupant's head. This position reduces the chance of a neck injury in a crash.



The height of the head restraint can be adjusted. To raise or lower the head restraint, press the button located on the side of the head restraint, and pull up or push the head restraint down, and release the button. Pull and push on the head restraint after the button is released to make sure that it is locked in place.

The front seat outboard head restraints are not removable.

Figure A-70: Head Restraint Use and Adjustment Information from Vehicle Owner's Manual



Figure A-71: Post-Test View of Shattered Vehicle Inner Door Panel (if applicable)

## APPENDIX B

### VEHICLE AND DUMMY RESPONSE DATA PLOTS

**TABLE OF DATA PLOTS**  
**Driver Dummy Instrumentation Plots**

<b>Fig.</b>	<b>Description</b>	<b>Page</b>
1	Driver Head Acceleration (X) Primary vs. Time	B-4
2	Driver Head Acceleration (Y) Primary vs. Time	B-4
3	Driver Head Acceleration (Z) Primary vs. Time	B-4
4	Driver Head Resultant Acceleration Primary vs. Time	B-4
5	Driver Lower Spine T12 Acceleration (X) vs. Time	B-5
6	Driver Lower Spine T12 Acceleration (Y) vs. Time	B-5
7	Driver Lower Spine T12 Acceleration (Z) vs. Time	B-5
8	Driver Lower Spine T12 Resultant Acceleration vs. Time	B-5
9	Driver Iliac Wing Force on Impact Side (Y) vs. Time	B-6
10	Driver Acetabulum Force on Impact Side (Y) vs. Time	B-6
11	Driver Total Pelvis Force on Impact Side (Y) vs. Time	B-6

The following additional data for this test can be obtained from the Research and Development section of the NHTSA website. The website can be found at [www.NHTSA.gov](http://www.NHTSA.gov).

### **Additional Driver Dummy Instrumentation Data**

Driver Head Acceleration Redundant (X)  
Driver Head Acceleration Redundant (Y)  
Driver Head Acceleration Redundant (Z)  
Driver Upper Thorax Rib Deflection (Y)  
Driver Middle Thorax Rib Deflection (Y)  
Driver Lower Thorax Rib Deflection (Y)  
Driver Upper Abdomen Rib Deflection (Y)  
Driver Lower Abdomen Rib Deflection (Y)





### **Vehicle Instrumentation Data**





Vehicle Center of Gravity Acceleration (X)  
Vehicle Center of Gravity Acceleration (Y)  
Vehicle Center of Gravity Acceleration (Z)  
Left Floor Sill Acceleration (Y)  
Left A-Pillar Sill Acceleration (Y)  
Left Lower A-Pillar Acceleration (Y)  
Left Mid A-Pillar Acceleration (Y)  
Left B-Pillar Sill Acceleration (Y)  
Left Lower B-Pillar Acceleration (Y)  
Left Mid B-Pillar Acceleration (Y)  
Driver Seat Track at Dummy Hip Point Acceleration (Y)  
Engine Top Acceleration (X)  
Engine Top Acceleration (Y)  
Firewall Center Acceleration (Y)  
Right Roof at Vertical Impact Reference Line Acceleration (Y)  
Right Sill at Vertical Impact Reference Line Acceleration (Y)  
Rear Floorpan Behind Rear Axle at Centerline Acceleration (X)  
Rear Floorpan Behind Rear Axle at Centerline Acceleration (Y)

### **Pole Instrumentation Data**


Load Cell Pole Barrier #1 Force (Y)  
Load Cell Pole Barrier #2 Force (Y)  
Load Cell Pole Barrier #3 Force (Y)  
Load Cell Pole Barrier #4 Force (Y)  
Load Cell Pole Barrier #5 Force (Y)  
Load Cell Pole Barrier #6 Force (Y)  
Load Cell Pole Barrier #7 Force (Y)  
Load Cell Pole Barrier #8 Force (Y)



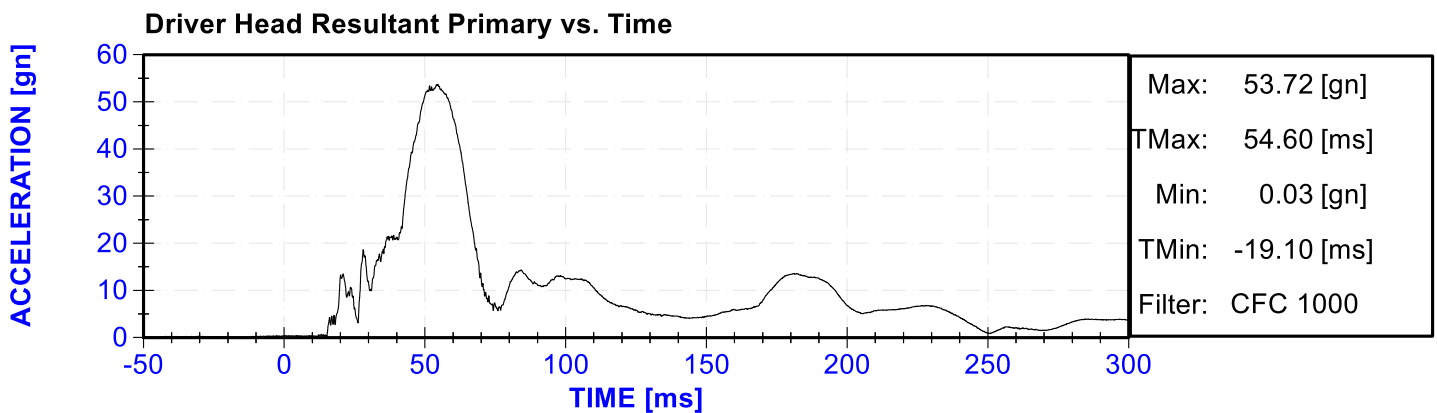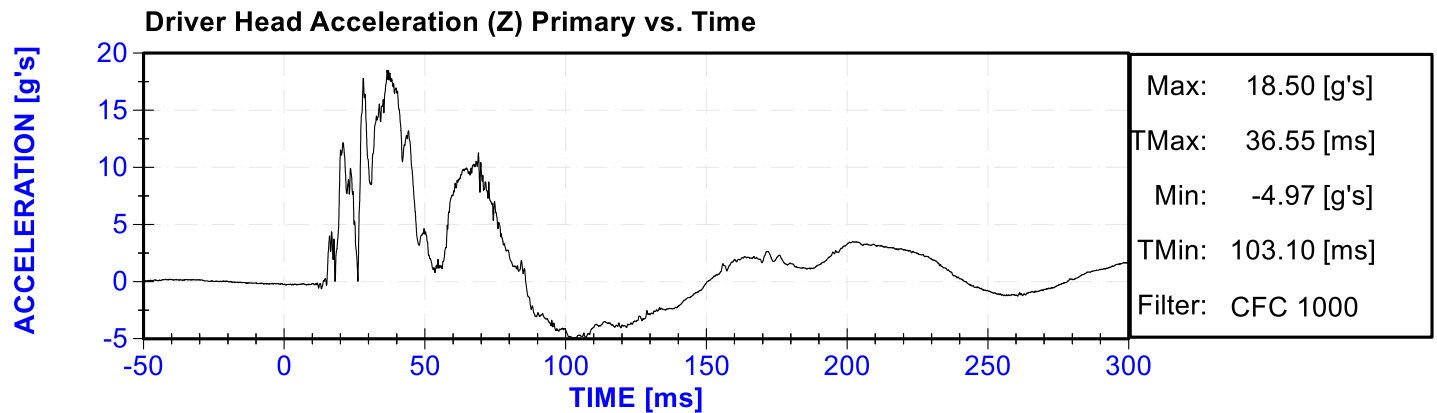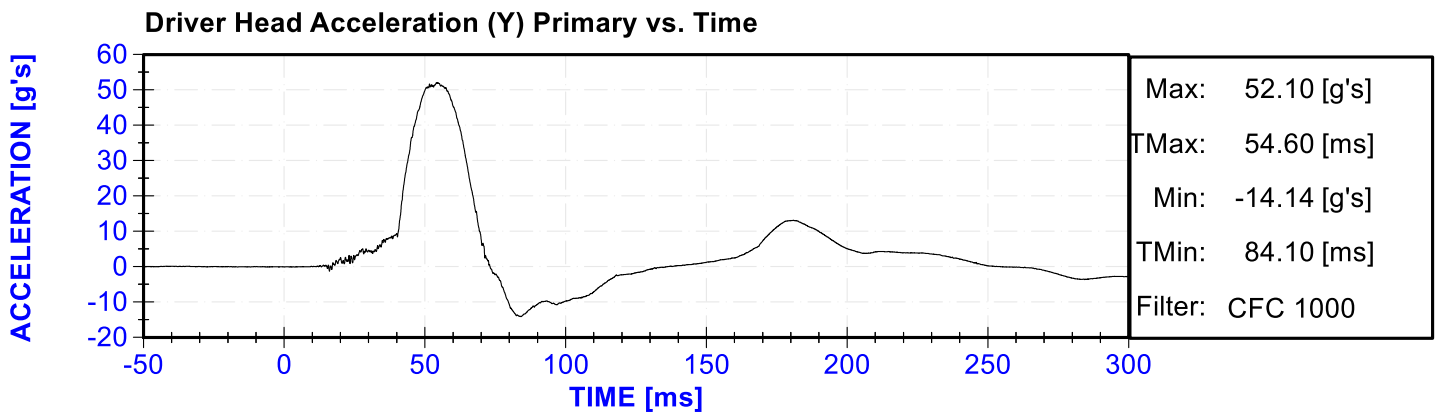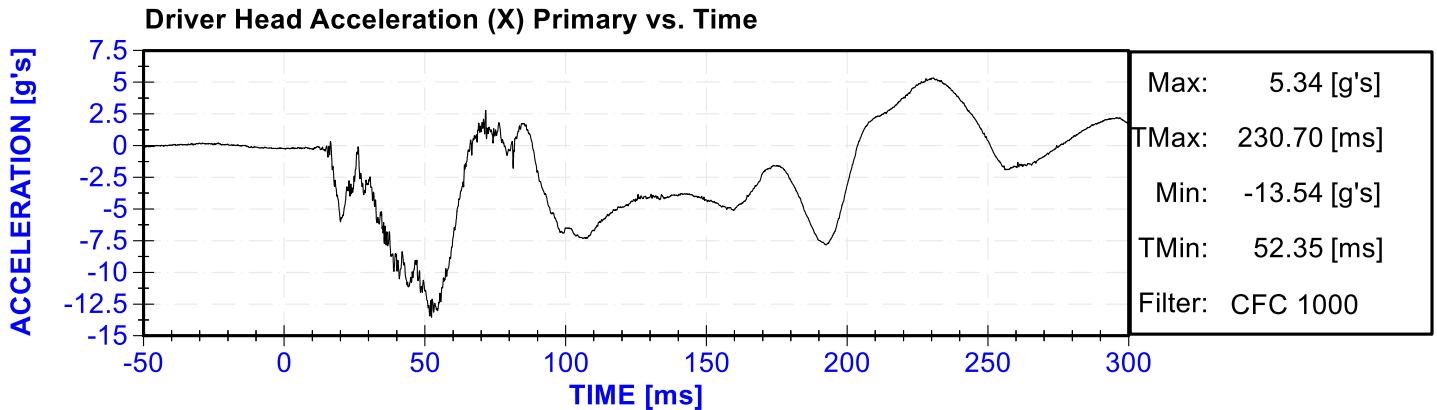


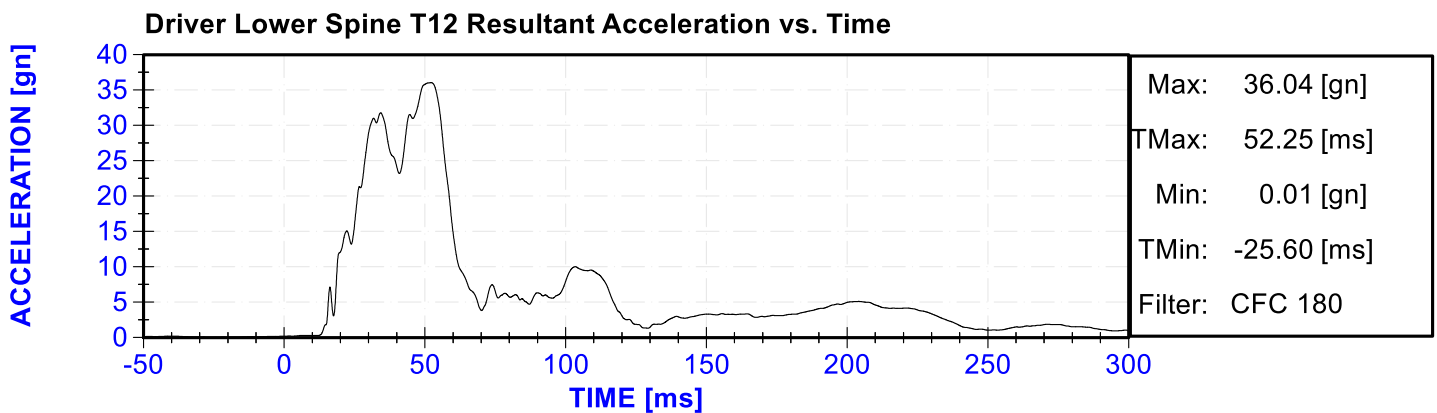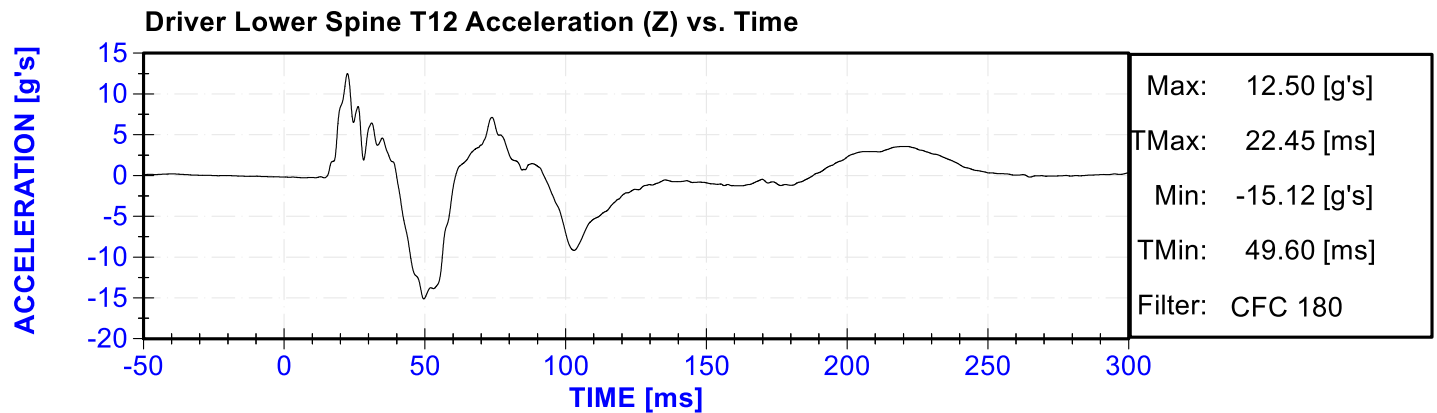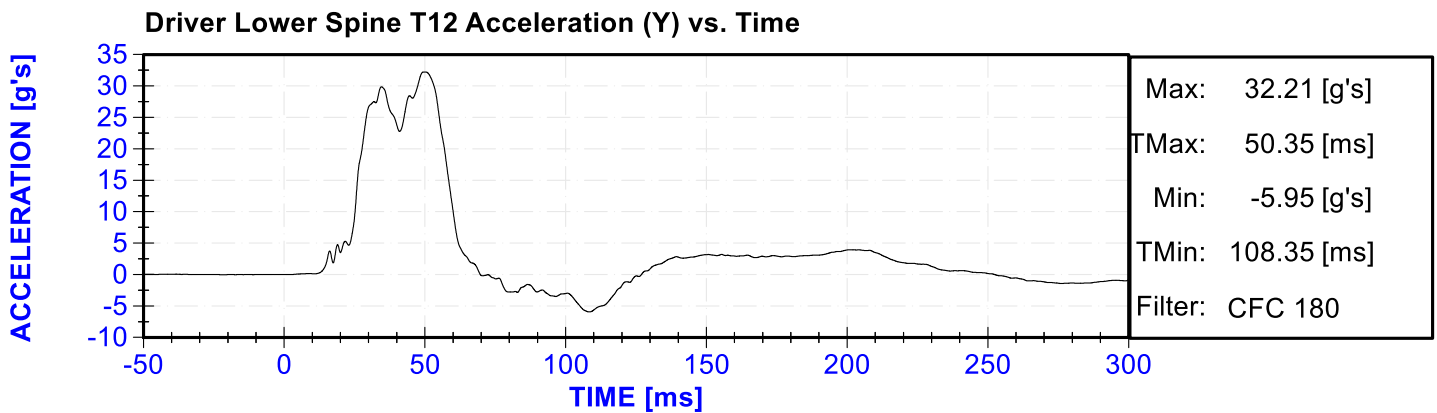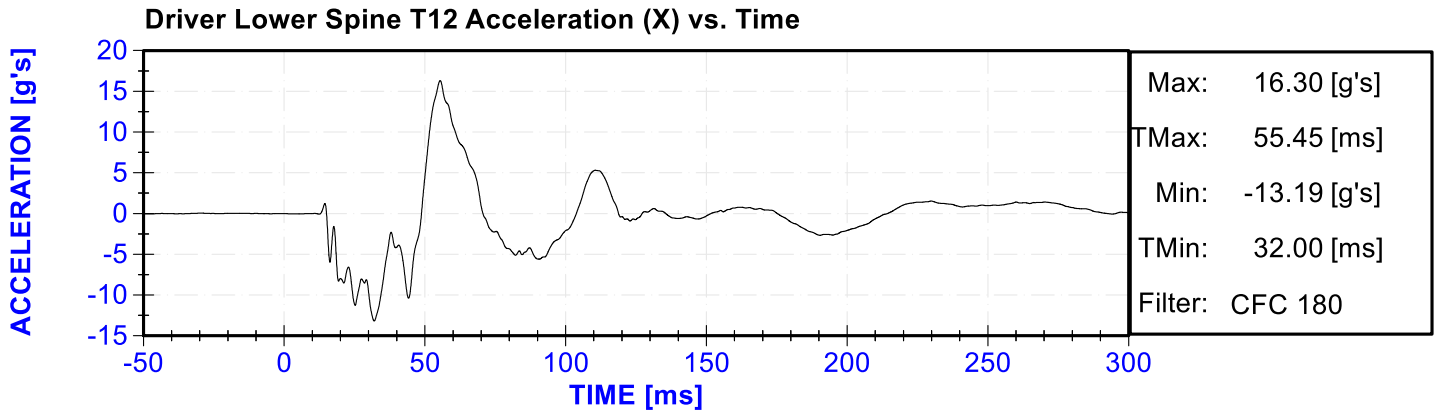


Driver Iliac Wing Force on Impact Side (Y) vs. Time

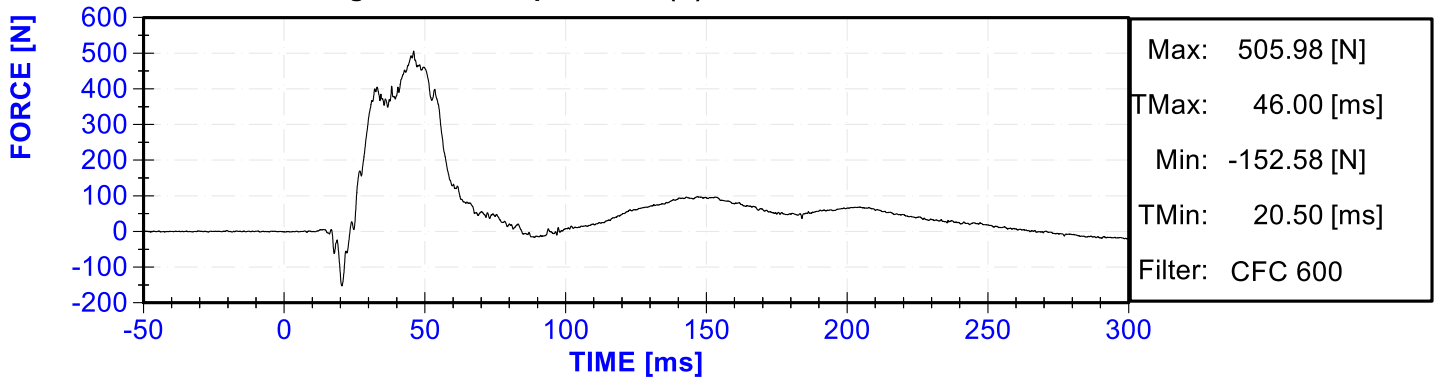

Driver Acetabulum Force on Impact Side (Y) vs. Time

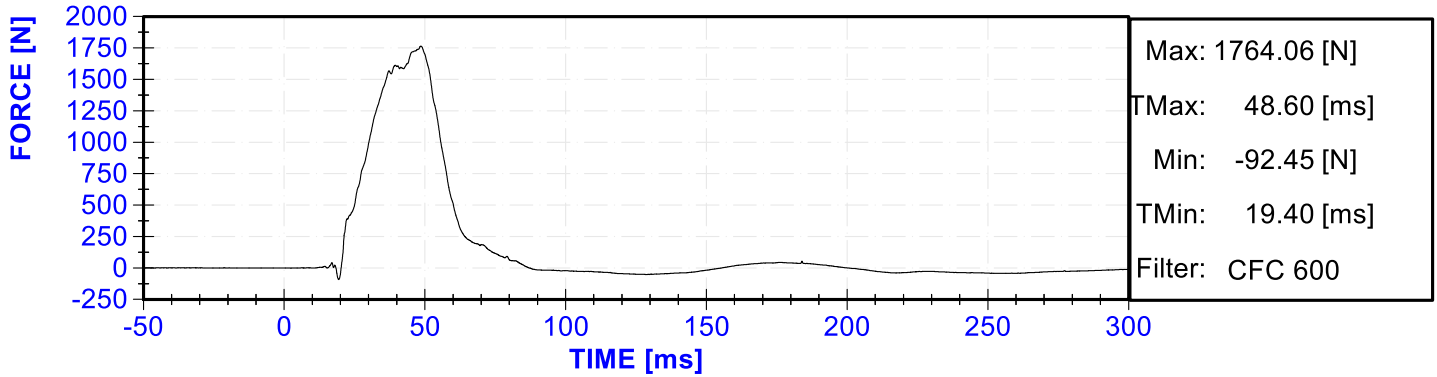

Driver Total Pelvis Force on Impact Side (Y) vs. Time

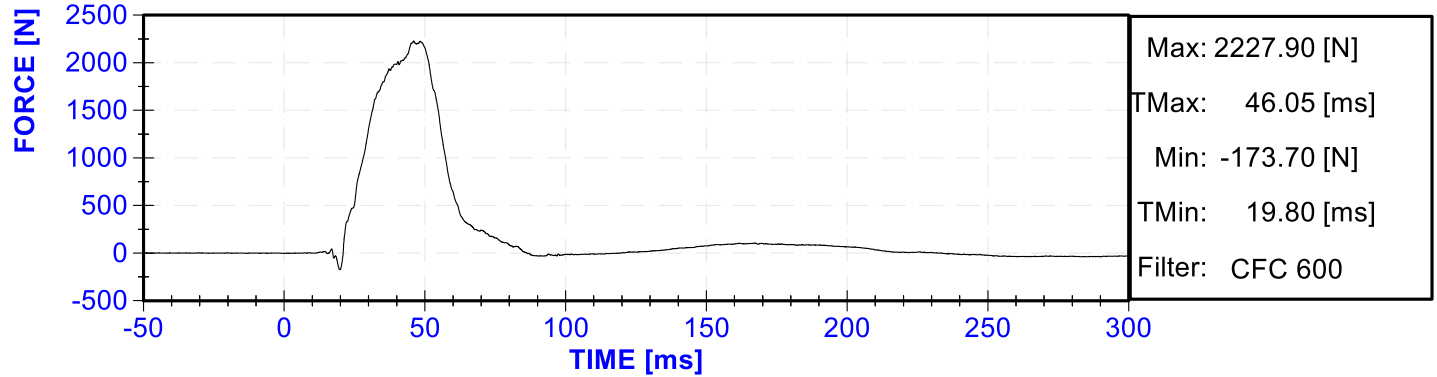



**APPENDIX C**

**DUMMY CONFIGURATION AND PERFORMANCE VERIFICATION DATA**

**CALIBRATION TEST RESULTS**

**PRE-TEST**

**SID-IIS 5<sup>TH</sup> PERCENTILE FEMALE - DRIVER ATD**

**SERIAL NO: DG8012**

**(CONFIGURED FOR LEFT SIDE IMPACT)**




External Measurements - SID-IIs

Technician: K. Dutton

Date: 04/29/2019

Dummy Serial Number: DG8012

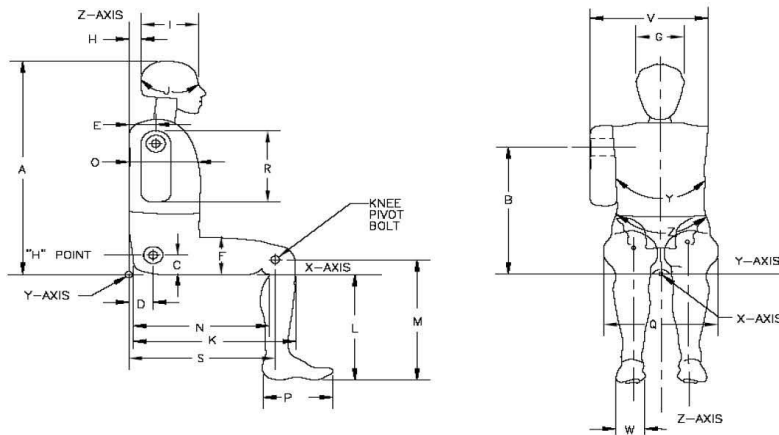

Symbol	Description	Specification (mm)		Result (mm)	Pass/Fail
A	Sitting Height	772	788	779	Pass
B	Shoulder Pivot Height	437	453	446	Pass
C	H-point Height	79	89	84	Pass
D	H-point from seatback	141	151	147	Pass
E	Shoulder Pivot from Backline	97	107	102	Pass
F	Thigh Clearance	119	135	126	Pass
G	Head Breadth	140	148	143	Pass
H	Head Back from Backline	40	46	44	Pass
I	Head Depth	178	188	185	Pass
J	Head Circumference	541	551	547	Pass
K	Buttock to Knee Length	514	540	531	Pass
L	Popliteal Height	343	369	356	Pass
M	Knee Pivot to floor height	392	409	402	Pass
N	Buttock Popliteal Length	416	442	433	Pass
O	Chest Depth w/o jacket	195	211	206	Pass
P	Foot Length	216	232	223	Pass
Q	Hip Breadth (w/pelvic plugs)	313	323	318	Pass
R	Arm Length	249	259	253	Pass
S	Knee Joint to seatback	477	493	486	Pass
V	Shoulder Width	341	357	345	Pass
W	Foot Width	78	94	85	Pass
Y	Chest Circumference w/jacket	851	881	867	Pass
Z	Waist Circumference	761	791	781	Pass


ATD Manufacturer	FTSS	Test Technician	C. Mantell
ATD Serial Number	DG8012	Laboratory Supervisor	K. Brogan

**Results**




Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	20.6	Pass
Humidity	10	70	%	36.9	Pass
Resultant Acceleration	115	137	g's	135.7	Pass
Oscillation	0	15	%	1.1	Pass
Fore-Aft Acceleration	-15	15	g's	2.4	Pass

**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
X Accelerometer	ENDEVCO 7264	AC-P74788	4/11/2019	10/10/2019
Y Accelerometer	ENDEVCO 7264CT	AC-P83432	4/11/2019	10/10/2019
Z Accelerometer	ENDEVCO 7264	AC-P83319	4/11/2019	10/10/2019

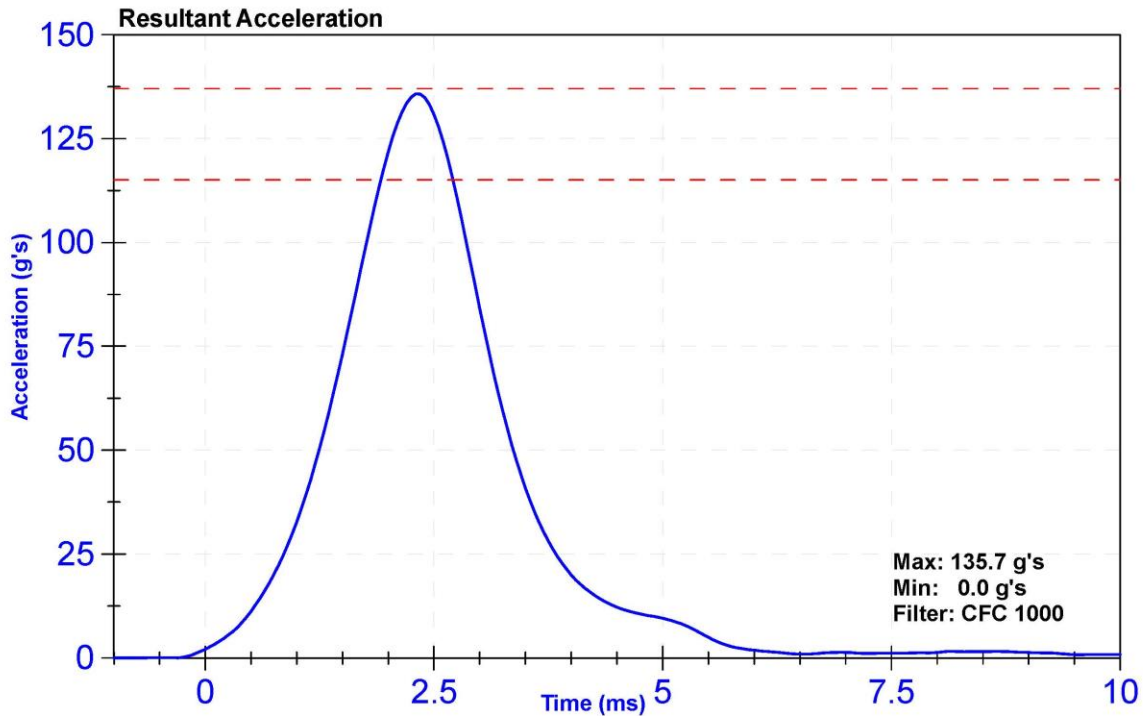



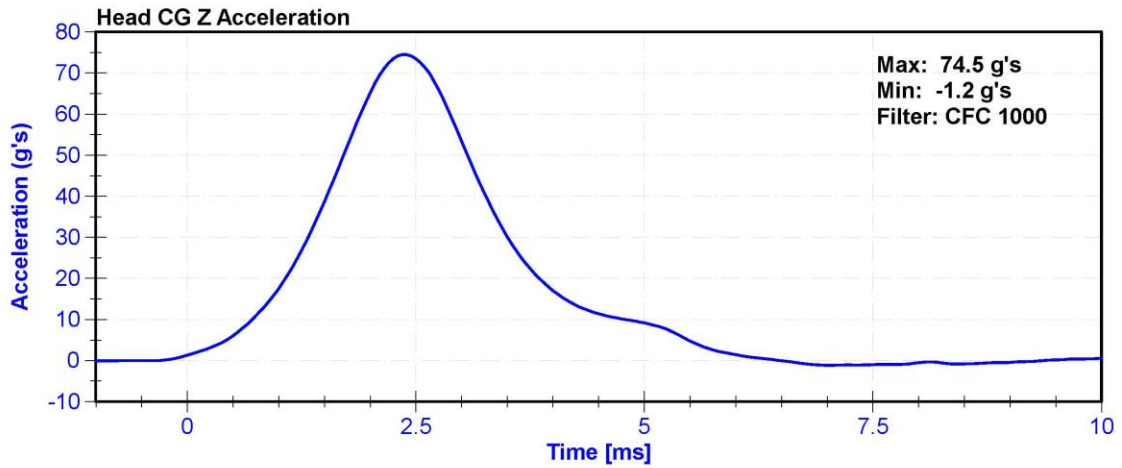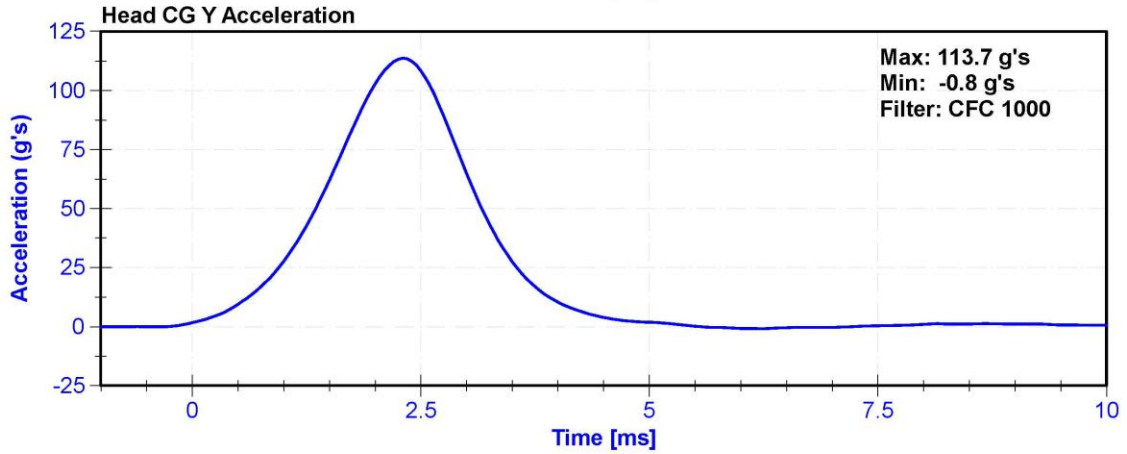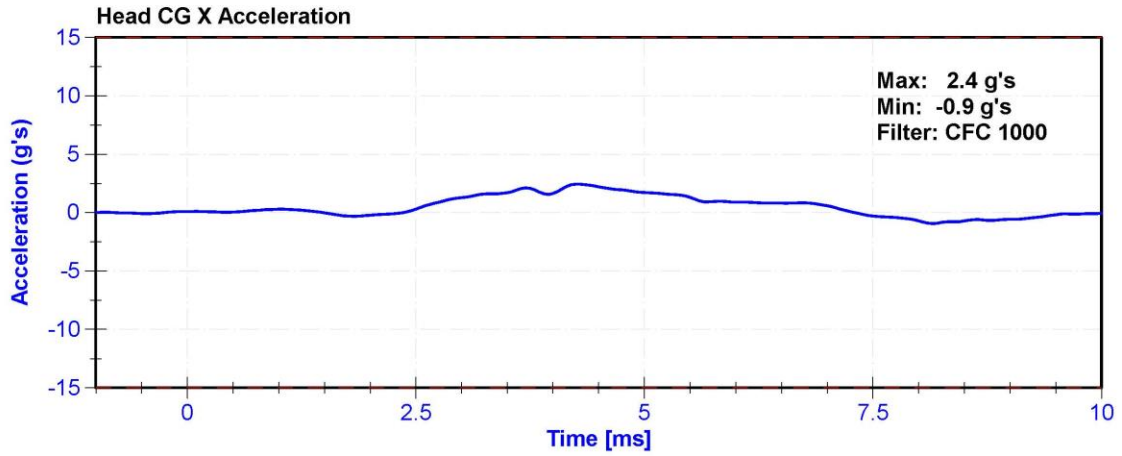


ATD Manufacturer	FTSS	Test Technician	D.Reinhard
ATD Serial Number	DG8012	Laboratory Supervisor	K. Brogan



**Results**

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	20.9	Pass
Humidity	10	70	%	30.3	Pass
Velocity	5.51	5.63	m/s	5.514	Pass
Pendulum Impulse at 10ms	2.2	2.8	m/s	2.29	Pass
Pendulum Impulse at 15ms	3.3	4.1	m/s	3.38	Pass
Pendulum Impulse at 20ms	4.4	5.4	m/s	4.54	Pass
Pendulum Impulse at 25ms	5.4	6.1	m/s	5.43	Pass
Pendulum Impulse from 25 to 100ms	5.5	6.2	m/s	5.98	Pass
Neck Rotation	71	81	deg	72.2	Pass
Time at Maximum Rotation	50	70	ms	56.4	Pass
Moment about the OC	36	44	Nm	43.6	Pass
Moment Decay to 0 Nm	102	126	ms	108.5	Pass

**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	ENDEVCO 7231CT	AC-AH5M9 Pend	1/29/2019	1/29/2020
Pendulum Potentiometer	Denton 78051-342	DS-184Pend	11/1/2018	11/1/2019
Condyle Potentiometer	Denton 78051-342	DS-185Pend	11/1/2018	11/1/2019
Upper Neck Load Cell	Denton 1716	LC-2018 FY	9/28/2018	9/28/2019

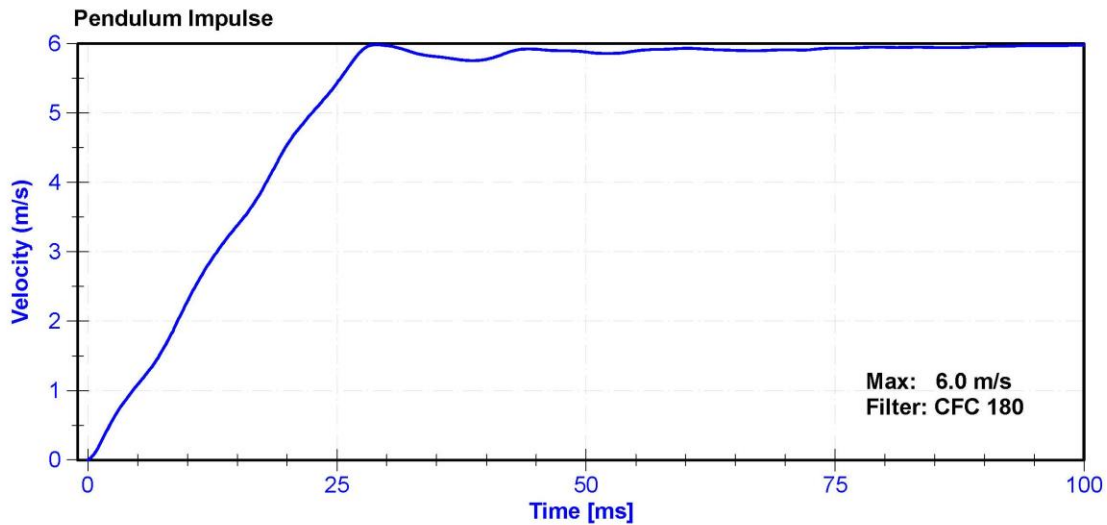

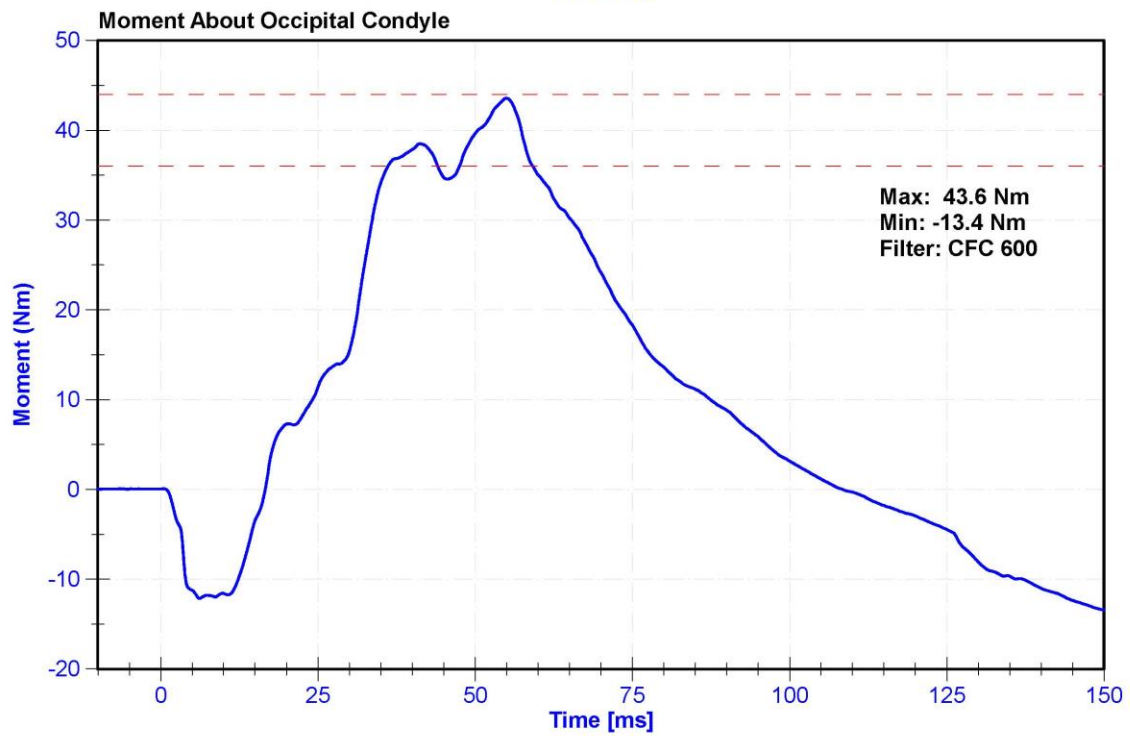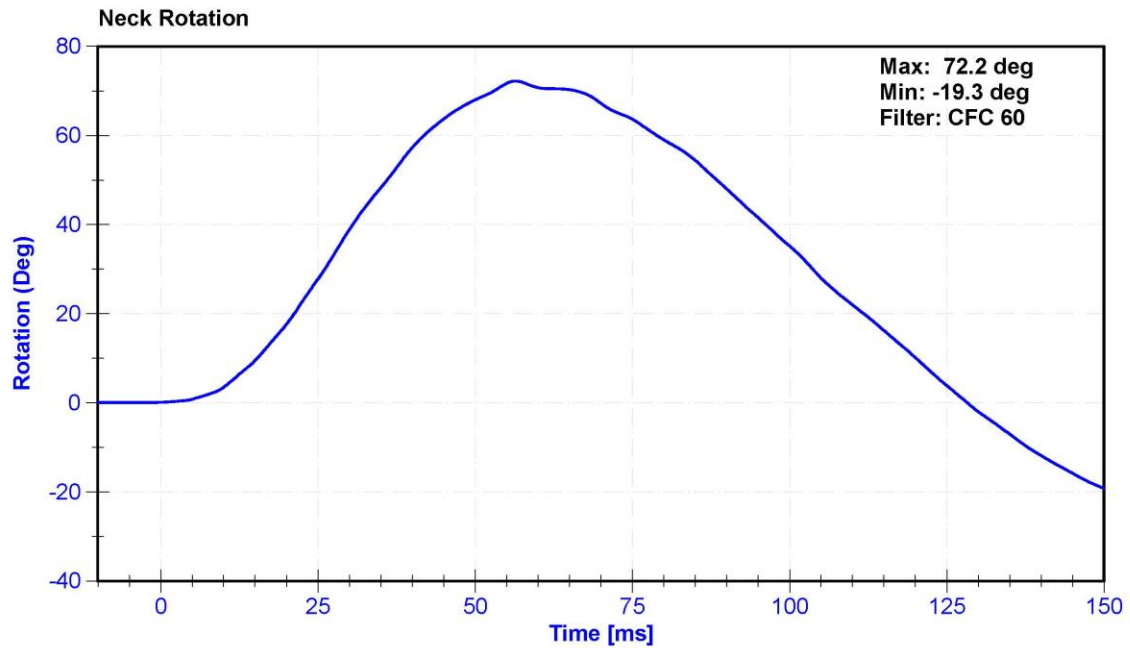




ATD Manufacturer	FTSS	Test Technician	D.Reinhard
ATD Serial Number	DG8012	Laboratory Supervisor	K. Brogan



**Results**

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21.8	Pass
Humidity	10	70	%	28.7	Pass
Velocity	4.2	4.4	m/s	4.37	Pass
Probe Acceleration	13	18	g's	16.1	Pass
Shoulder Deflection	28	37	mm	29.0	Pass
Lateral Upper Spine Acceleration	17	22	g's	21.1	Pass

**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	MSI 64C-2000	A260487	2/21/2019	8/22/2019
Shoulder Potentiometer	Servo 08TC1-3745	DS-1845GFE	10/11/2018	10/11/2019
Upper Spine Y Accelerometer	ENDEVCO 7264CT	AC-P64148	4/9/2019	10/8/2019

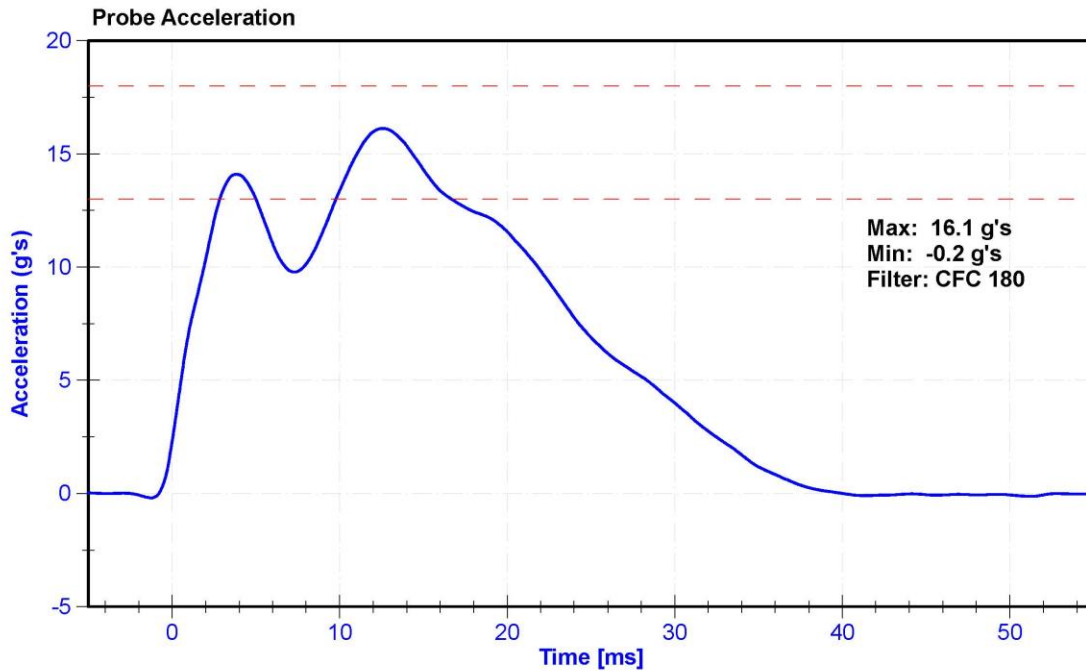

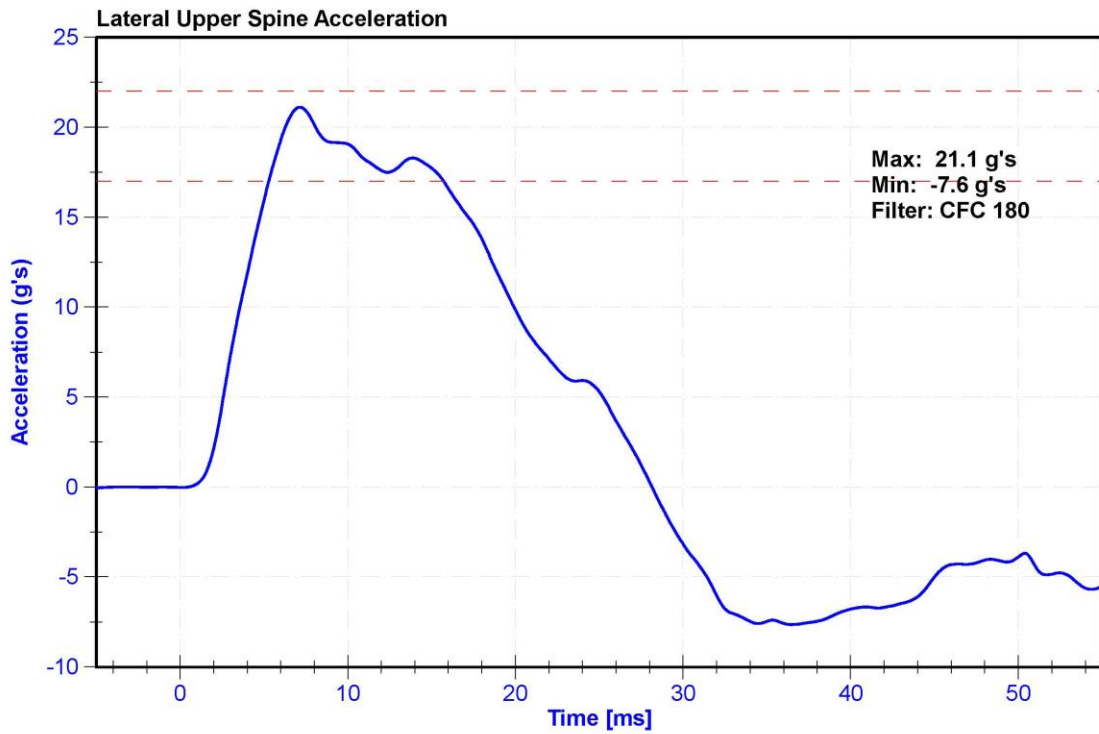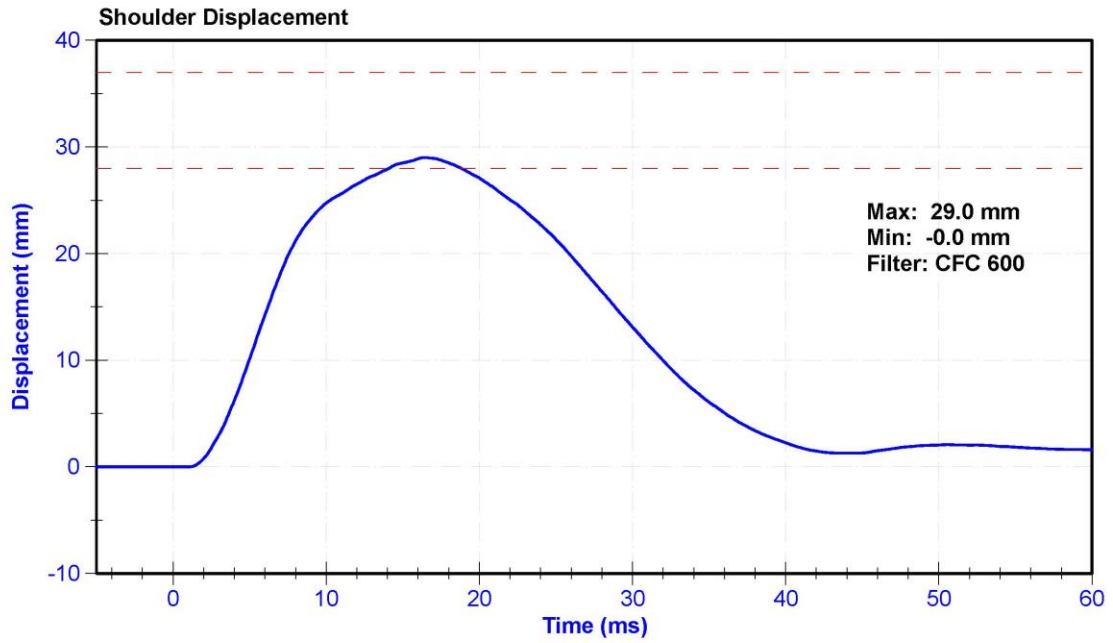


ATD Manufacturer	FTSS	Test Technician	K. Dutton
ATD Serial Number	DG8012	Laboratory Supervisor	K. Brogan

**Results**


Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	22.0	Pass
Humidity	10	70	%	38.9	Pass
Velocity	6.6	6.8	m/s	6.70	Pass
Probe Acceleration after 5 ms	30	36	g's	33.1	Pass
Lateral Upper Spine Acceleration	34	43	g's	35.7	Pass
Lateral Lower Spine Acceleration	29	37	g's	31.5	Pass
Shoulder Deflection	31	40	mm	31.3	Pass
Upper Thorax Rib Deflection	25	32	mm	27.8	Pass
Mid Thorax Rib Deflection	30	36	mm	33.2	Pass
Lower Thorax Rib Deflection	32	38	mm	35.9	Pass



**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	ENDEVCO 7264CT	AC-P71278	12/14/2018	12/14/2019
Upper Spine T1 Y Accelerometer	ENDEVCO 7264CT	AC-P64148	4/9/2019	10/8/2019
Upper Spine T12 Y Accelerometer	ENDEVCO 7264CT	AC-P51699	4/9/2019	10/8/2019
Shoulder Potentiometer	Servo 08TC1-3745	DS-1845GFE	10/11/2018	10/11/2019
Upper Thorax Rib Potentiometer	Servo 1246	DS-2165GFE	5/21/2019	5/20/2020
Middle Thorax Rib Potentiometer	Servo 08TC1-3621	DS-45 GFE	10/12/2018	10/12/2019
Lower Thorax Rib Potentiometer	Servo 08TC1-3787	DS-011GFE	10/12/2018	10/12/2019

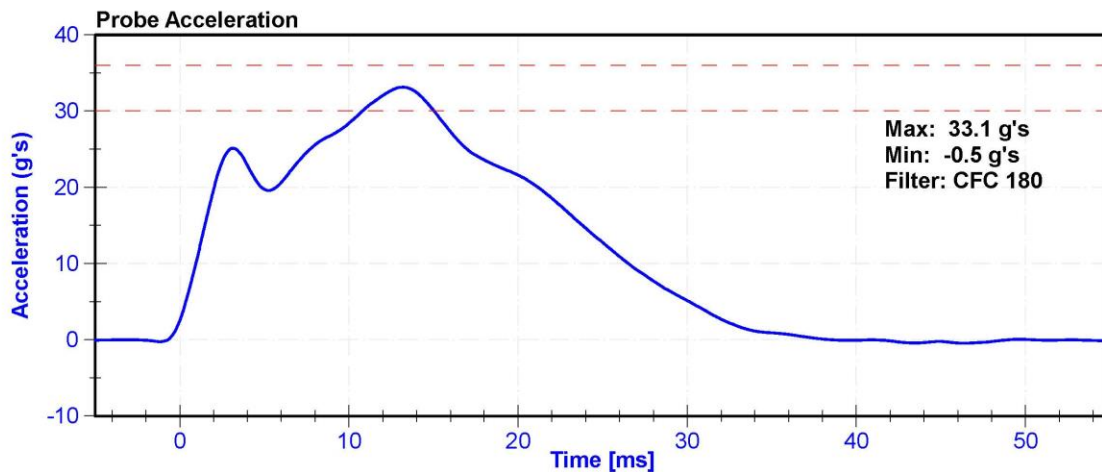



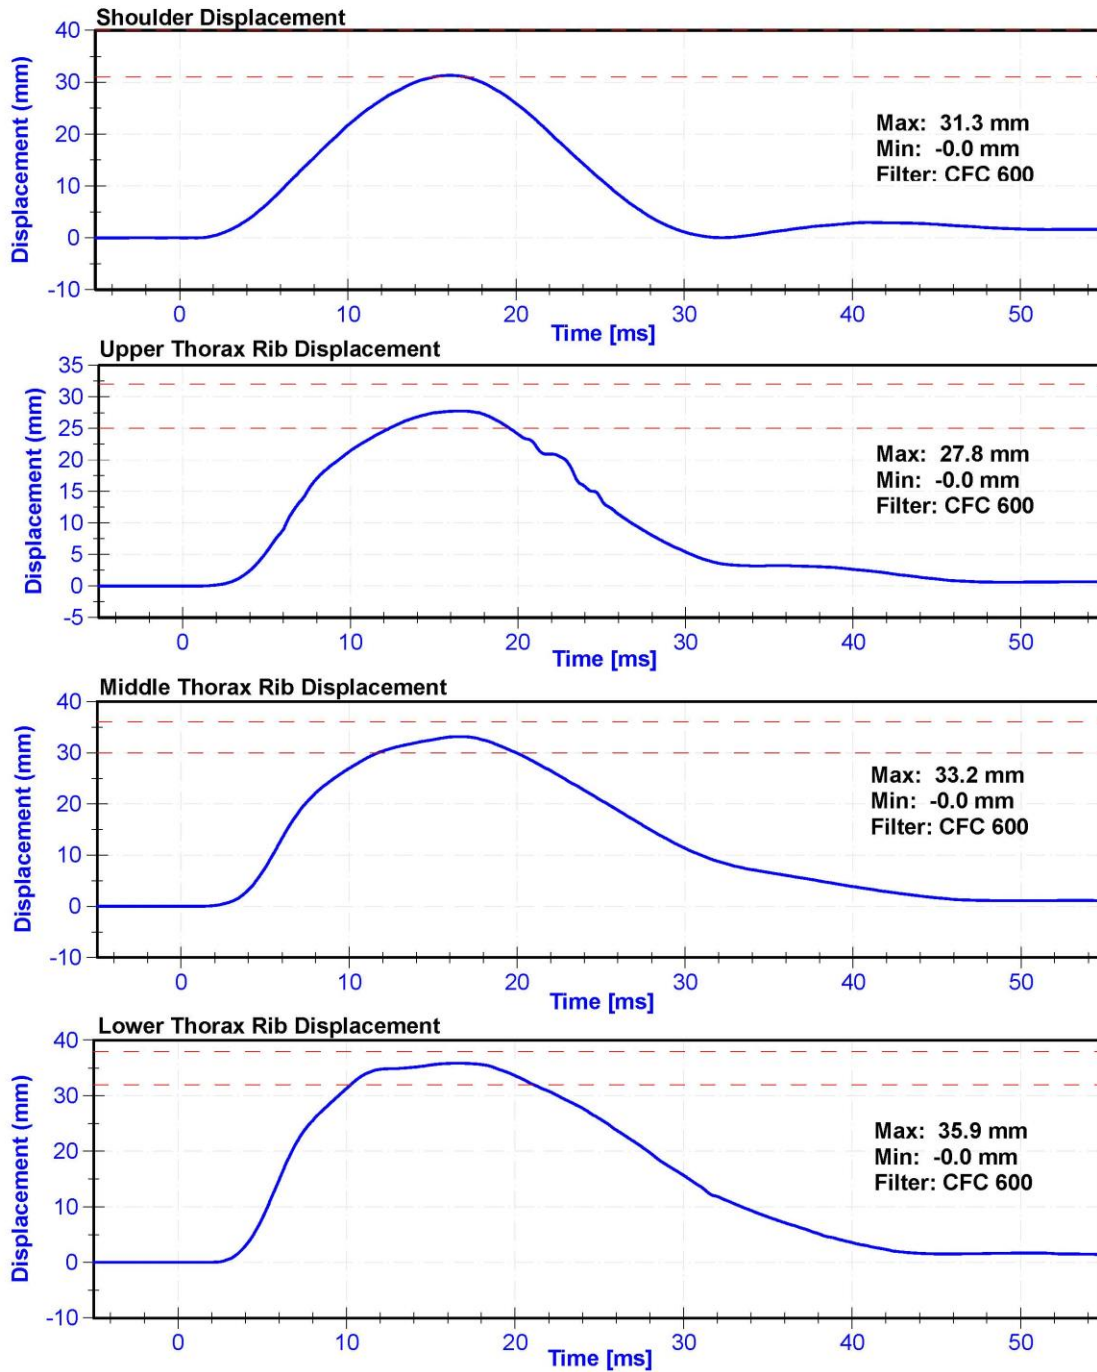

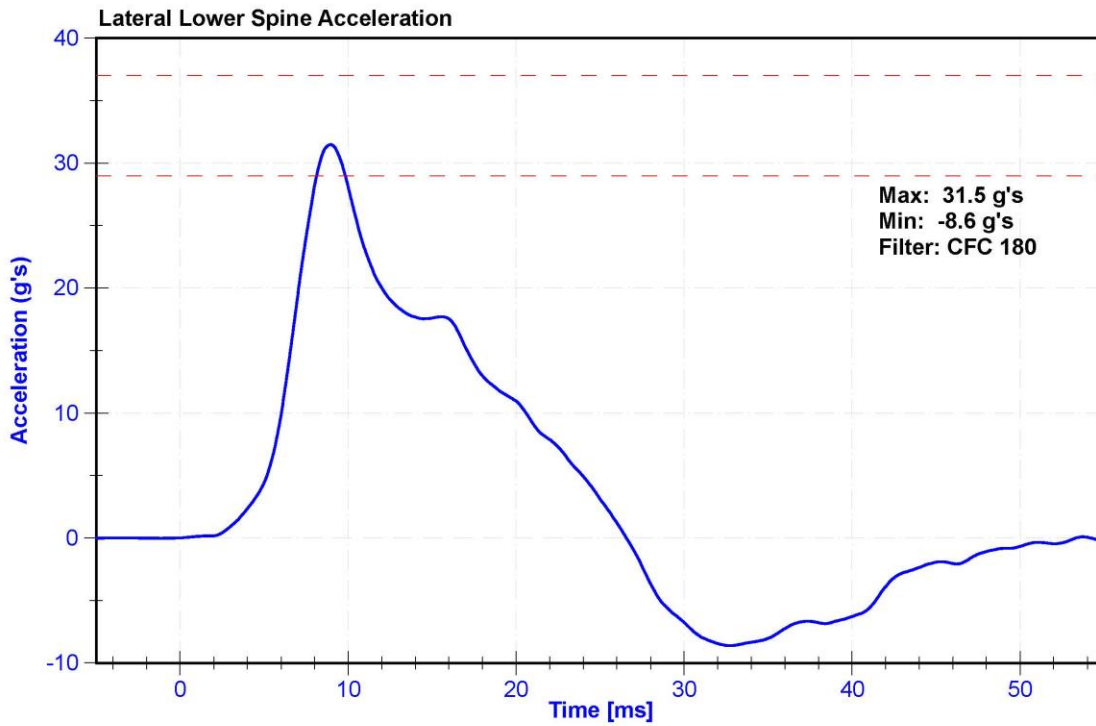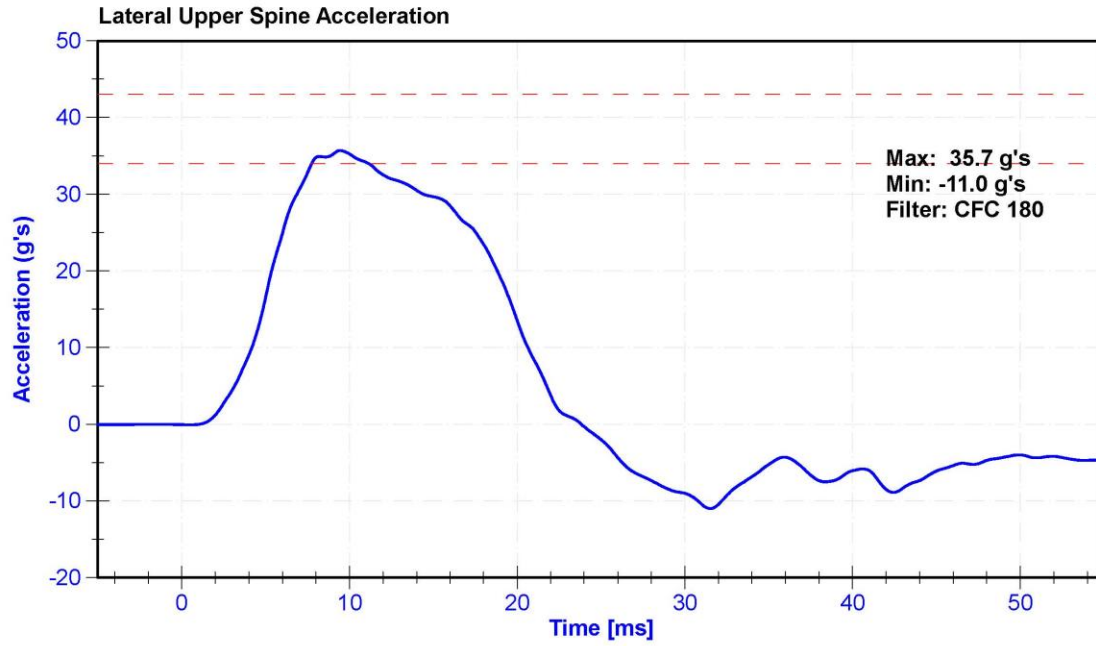


ATD Manufacturer	FTSS	Test Technician	K. Dutton
ATD Serial Number	DG8012	Laboratory Supervisor	K. Brogan

**Results**




Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	22.1	Pass
Humidity	10	70	%	37.8	Pass
Velocity	4.2	4.4	m/s	4.37	Pass
Probe Acceleration	14	18	g's	16.7	Pass
Lateral Upper Spine Acceleration	13	17	g's	15.0	Pass
Lateral Lower Spine Acceleration	7	11	g's	9.6	Pass
Upper Thorax Rib Deflection	32	40	mm	36.3	Pass
Middle Thorax Rib Deflection	39	45	mm	41.2	Pass
Lower Thorax Rib Deflection	35	43	mm	38.0	Pass



**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	ENDEVCO 7264CT	AC-P71278	12/14/2018	12/14/2019
Upper Spine Y Accelerometer	ENDEVCO 7264CT	AC-P64148	4/9/2019	10/8/2019
Lower Spine Y Accelerometer	ENDEVCO 7264CT	AC-P51699	4/9/2019	10/8/2019
Upper Thorax Rib Potentiometer	Servo 1246	DS-2165GFE	5/21/2019	5/20/2020
Middle Thorax Rib Potentiometer	Servo 08TC1-3621	DS-45 GFE	10/12/2018	10/12/2019
Lower Thorax Rib Potentiometer	Servo 08TC1-3787	DS-011GFE	10/12/2018	10/12/2019

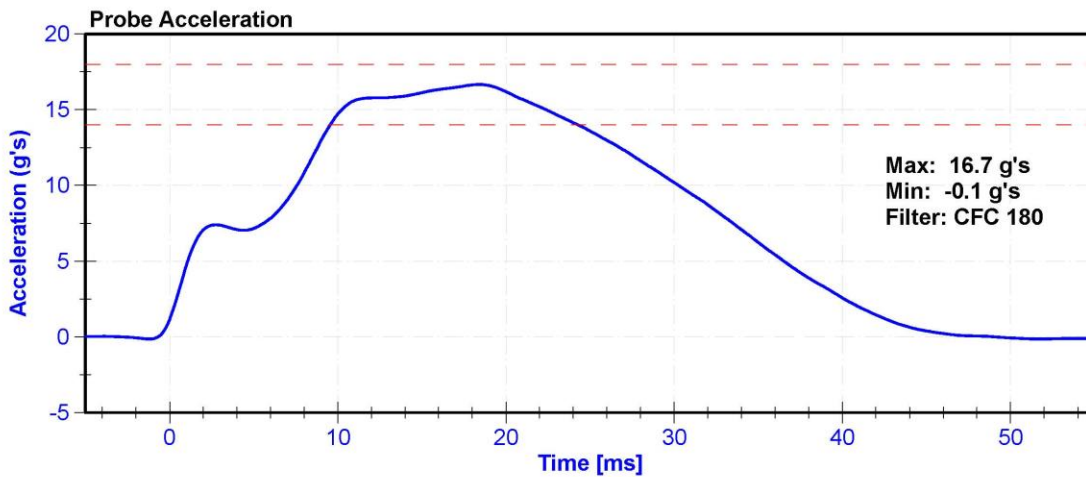



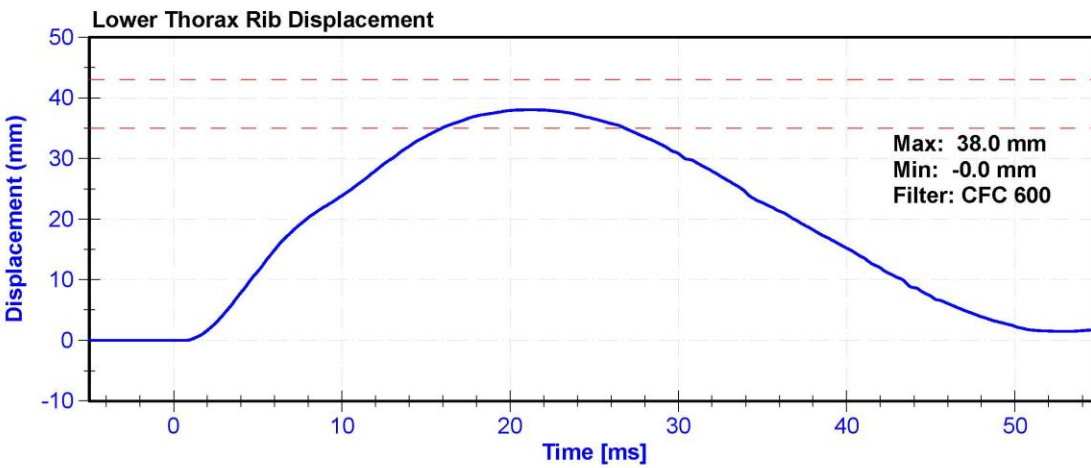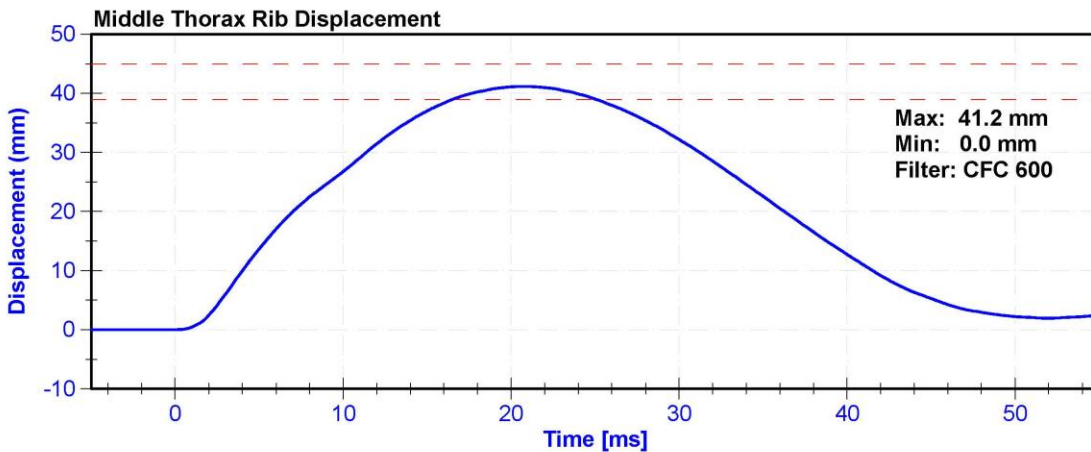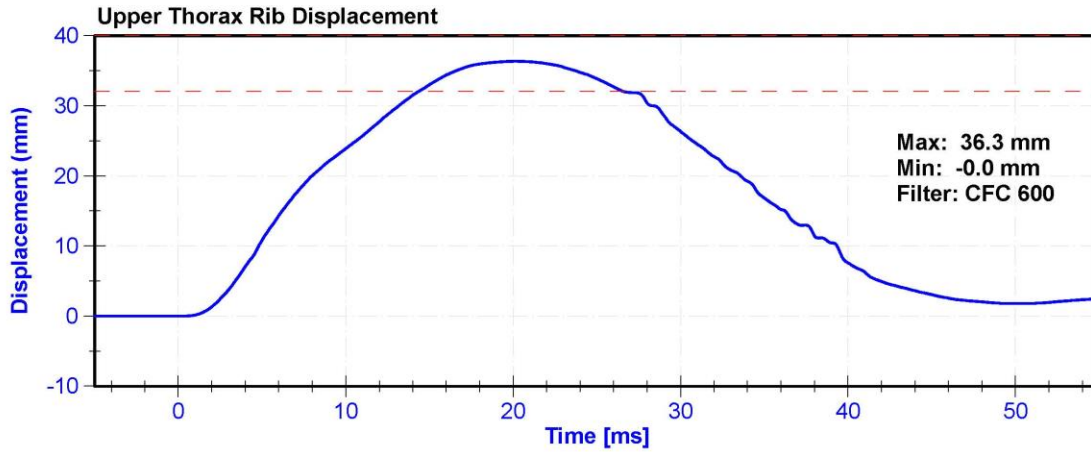

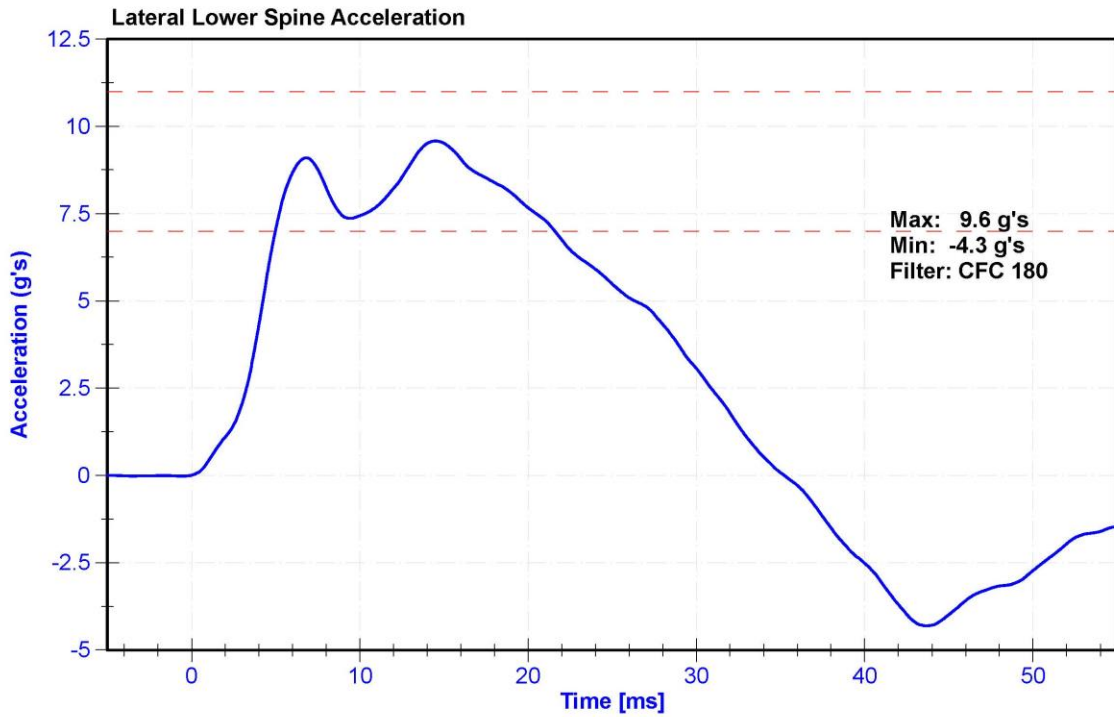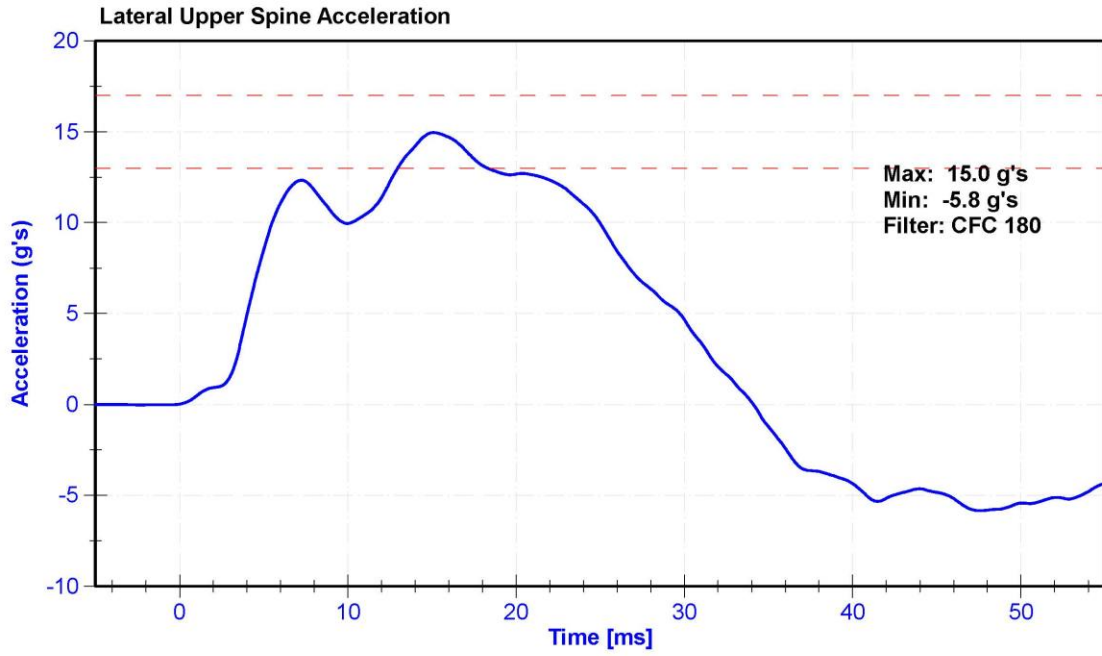


ATD Manufacturer	FTSS	Test Technician	D.Reinhard
ATD Serial Number	DG8012	Laboratory Supervisor	K. Brogan

**Results**



Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	20.6	Pass
Humidity	10	70	%	30.4	Pass
Velocity	4.2	4.4	m/s	4.36	Pass
Probe Acceleration	12	16	g's	14.2	Pass
Lateral Lower Spine Acceleration	9	14	g's	9.4	Pass
Upper Abdomen Rib Deflection	36	47	mm	44.2	Pass
Lower Abdomen Rib Deflection	33	44	mm	42.4	Pass


**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Probe Accelerometer	MSI 64C-2000	A260487	2/21/2019	8/22/2019
Lower Spine Y Accelerometer	ENDEVCO 7264CT	AC-P51699	4/9/2019	10/8/2019
Upper Abdomen Rib Potentiometer	Servo 08TC1-3725	DS-008GFE	10/11/2018	10/11/2019
Lower Abdomen Rib Potentiometer	Servo 08TC1-3745	DS-1774GFE	10/12/2018	10/12/2019

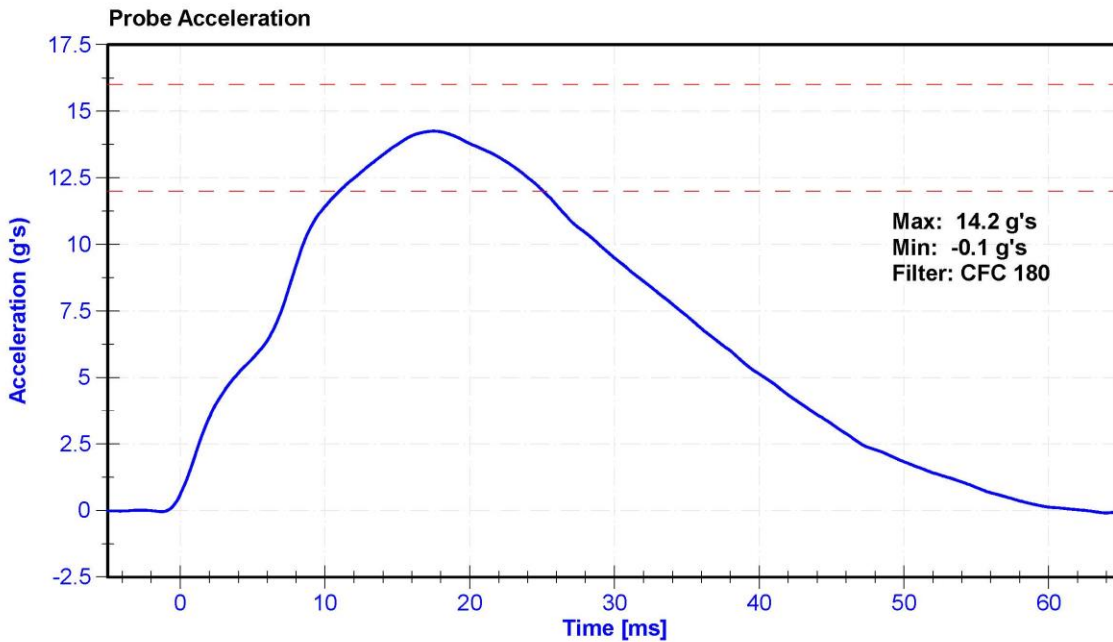



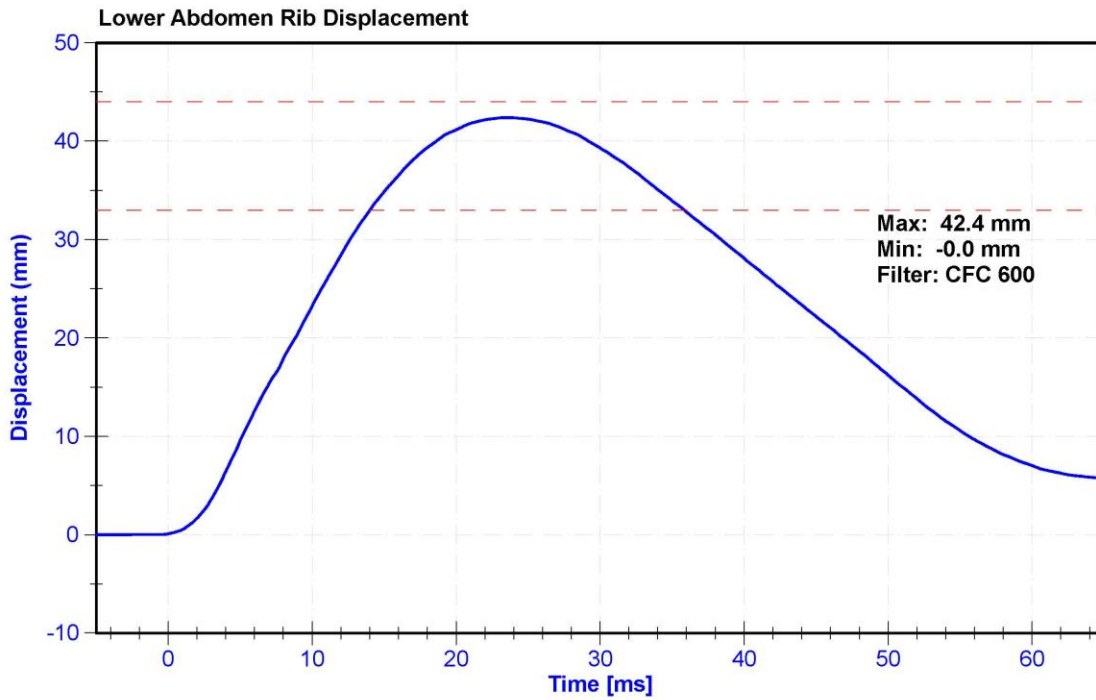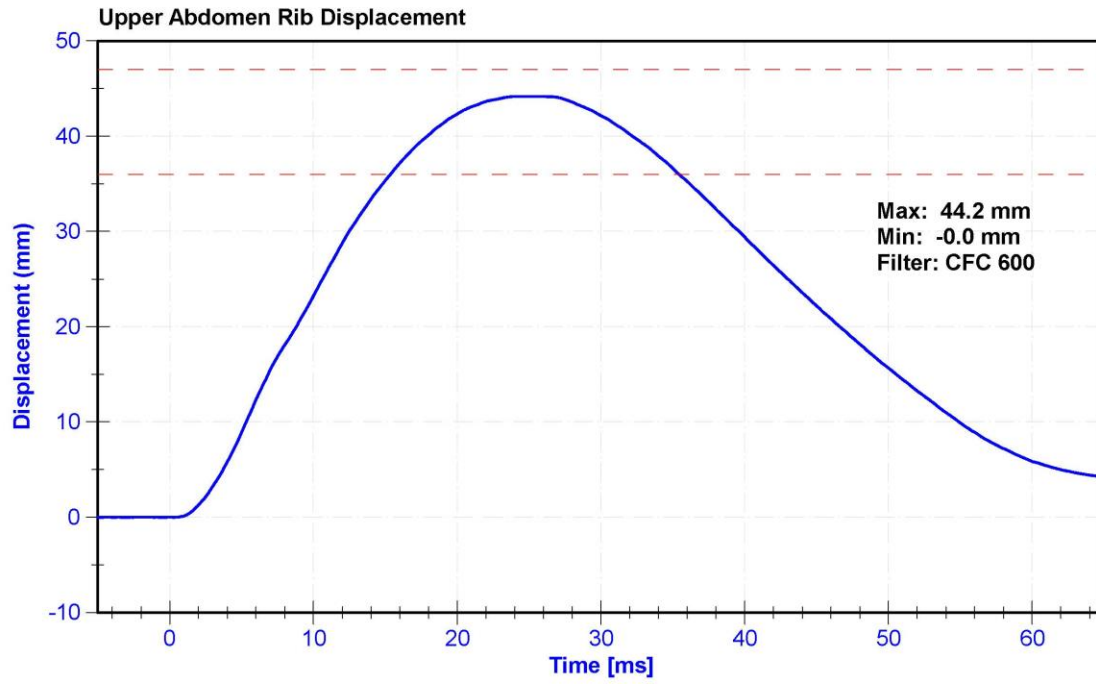

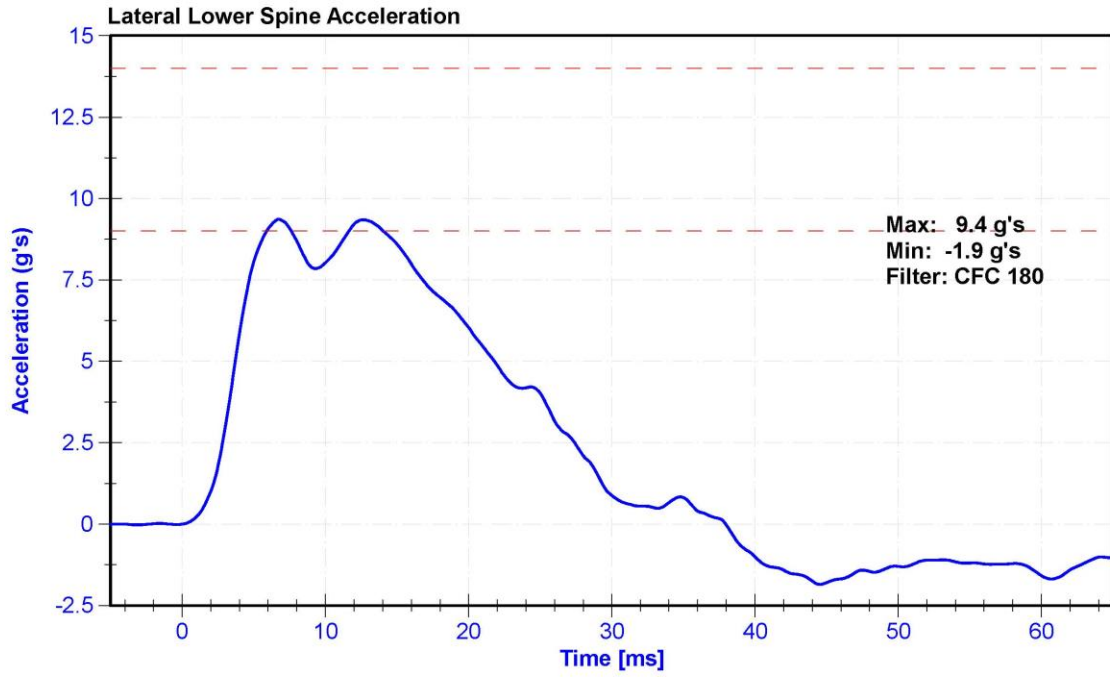


ATD Manufacturer	FTSS	Test Technician	D.Reinhard
ATD Serial Number	DG8012	Laboratory Supervisor	K. Brogan

**Results**



Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	20.6	Pass
Humidity	10	70	%	36.7	Pass
Velocity	6.6	6.8	m/s	6.68	Pass
Probe Acceleration	38	47	g's	47.0	Pass
Lateral Pelvis Acceleration after 6ms	34	42	g's	41.9	Pass
Acetabulum Force	3600	4300	N	3671.7	Pass

**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	MSI 64C-2000	A260487	2/21/2019	8/22/2019
Pelvis Y Accelerometer	ENDEVCO 7264CT	AC-P51875	4/11/2019	10/10/2019
Acetabulum Load Cell	Denton 3249J	LC-4986Fy	6/4/2018	6/4/2019
Certification Plug	SACO	11626	10/4/2016	N/A
Crash Test Plug	SACO	12351	3/23/2018	N/A

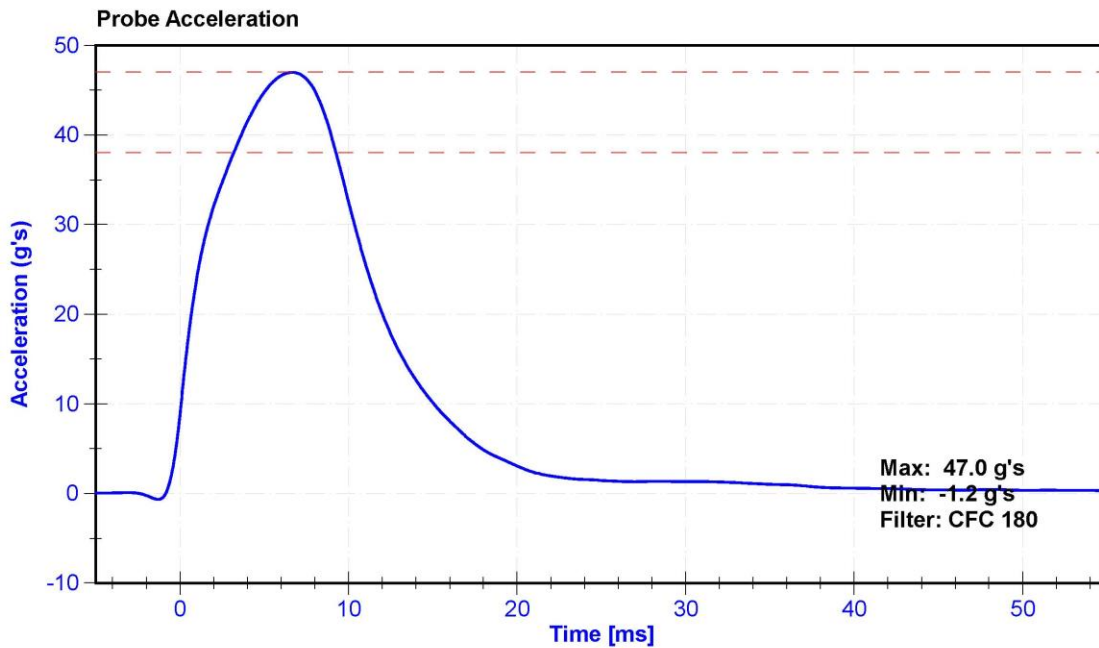



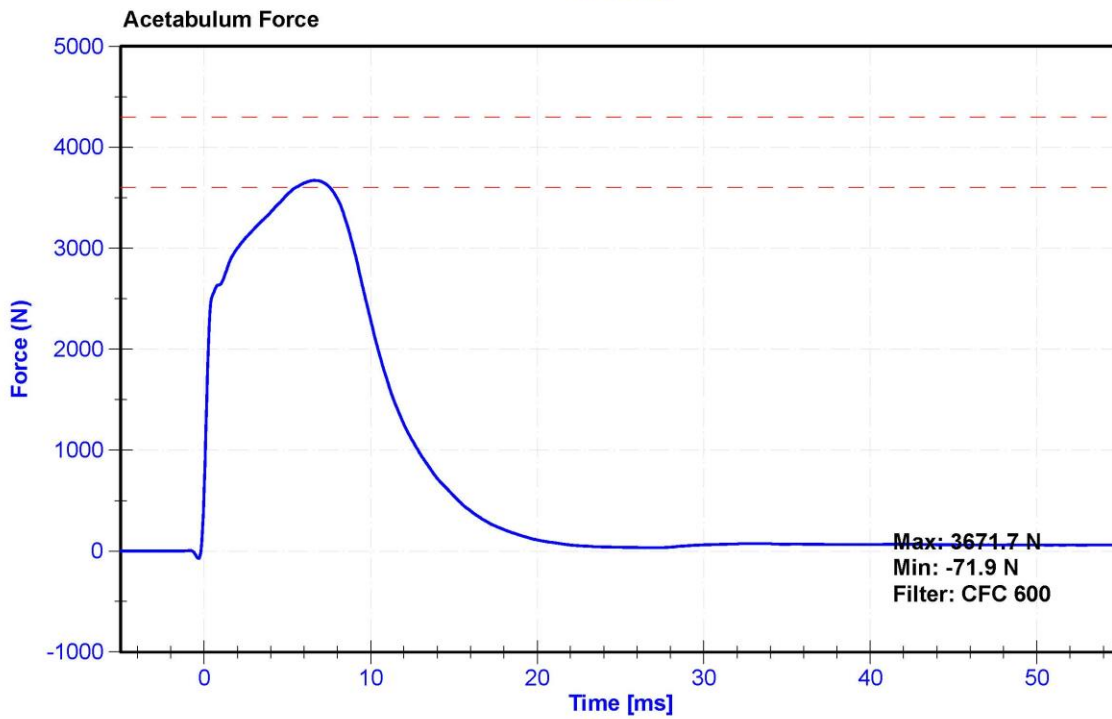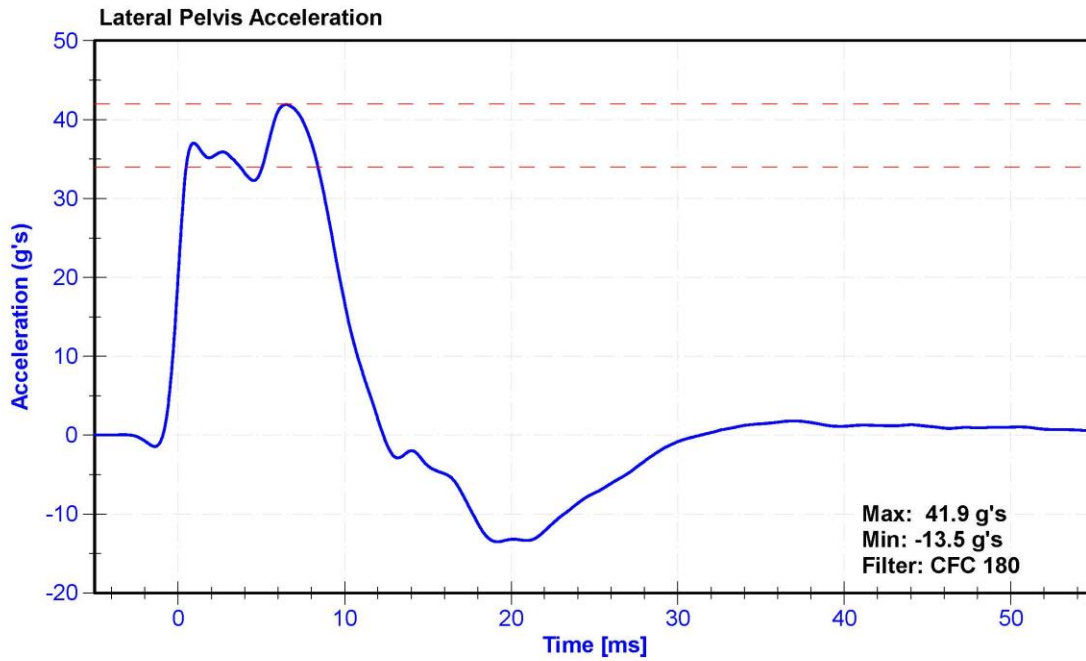



**SID-11s Pelvis Plug Certification Test**


Plug S/N 11626  
 Test Number 3169  
 Report Number 3162  
 Test Date 10/4/2016 2:19:23 PM

Force (-N) vs Extension (-mm)

*Do not certify  
 4/30/19*

Test Results	Spec Min	Spec Max
Force @ 0.5 mm (N)	50.00	600.00
Force @ 1.5 mm (N)	850.00	1,400.00
Force @ 2.5 mm (N)	1,305.00	1,618.00
Force @ 3.0 mm (N)	1,361.00	1,673.00

Testing Machine STM-20 5965542  
 Load Cell S/N (TT240813), Units (LBS) 1000  
 Crosshead Speed (mm / min) or Rate 127  
 Extension or Position Measured by XHD\_100 (XHD100)

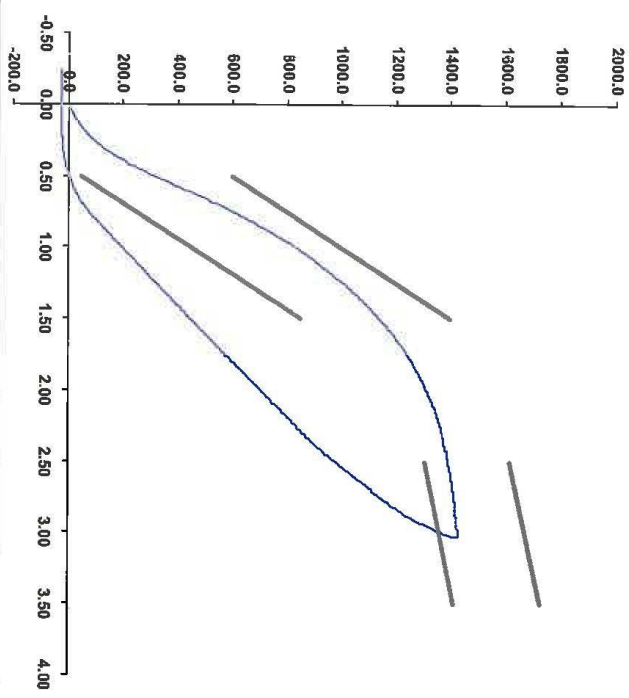

Notes:  
 Operator DC  
 Part Number 180-4450

Template No 107 04-Oct-16  
 SACO Research  
 By: *DC* Date: *10/4/16*  
 SACO Research 41735 Elm St, #401 Murfreesboro, TN 37132  
 Tel 310-694-2082 FAX



**SID-IIs Pelvis Plug Certification Test**

Plug S/N 12351

Test Number 6736


Report Number 6751

Test Date 3/23/2018 8:43:59 AM

Test Results	Spec Min	Spec Max
Force @ 0.5 mm (N)	50.00	600.00
Force @ 1.5 mm (N)	850.00	1,400.00
Force @ 2.5 mm (N)	1,306.00	1,618.00
Force @ 3.0 mm (N)	1,550.58	1,673.00

Testing Machine STM-20 5965542  
 Load Cell S/N (F1380947), Units (LBS) 1000  
 Crosshead Speed (mm / min) or Rate 127  
 Extension or Position Measured by XHD\_100 (XHD100)

Notes:

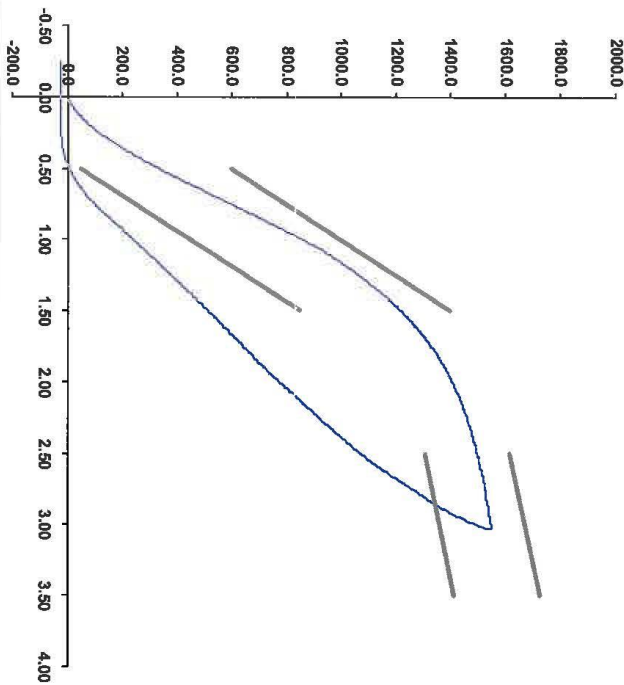

Operator

Part Number 180-4450

Template No 107 23-Mar-18  
 SACO Research

By: BC Date: 3/23/18

SACO Research 41735 Elm St, #401 Murfreesboro, TN 37132  
 Tel 310-694-2082 FAX

*DG8012  
 Crash 4/30/19*




ATD Manufacturer	FTSS	Test Technician	D.Reinhard
ATD Serial Number	DG8012	Laboratory Supervisor	K.Brogan



**Results**

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	20.6	Pass
Humidity	10	70	%	30.3	Pass
Velocity	4.2	4.4	m/s	4.40	Pass
Probe Acceleration	36	45	g's	41.0	Pass
Lateral Pelvis Acceleration	28	39	g's	31.5	Pass
Iliac Force	4100	5100	N	4404.6	Pass

**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	MSI 64C-2000	A260487	2/21/2019	8/22/2019
Pelvis Y Accelerometer	ENDEVCO 7264CT	AC-P51875	4/11/2019	10/10/2019
Iliac Load Cell	DENTON 3228J	LC-279Fy	10/4/2018	10/4/2019

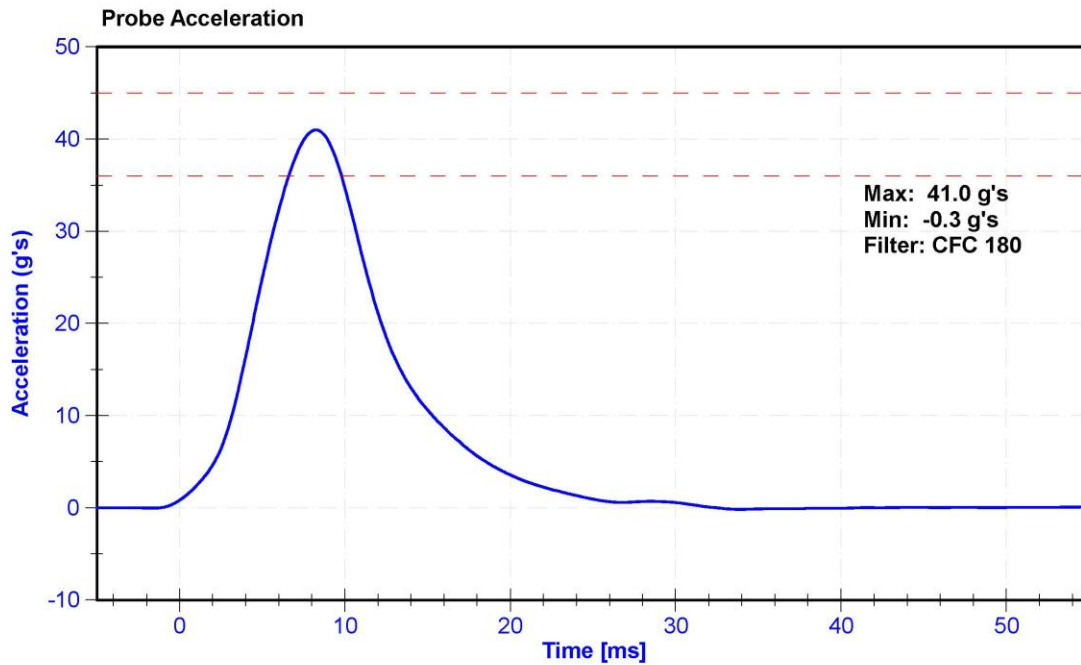

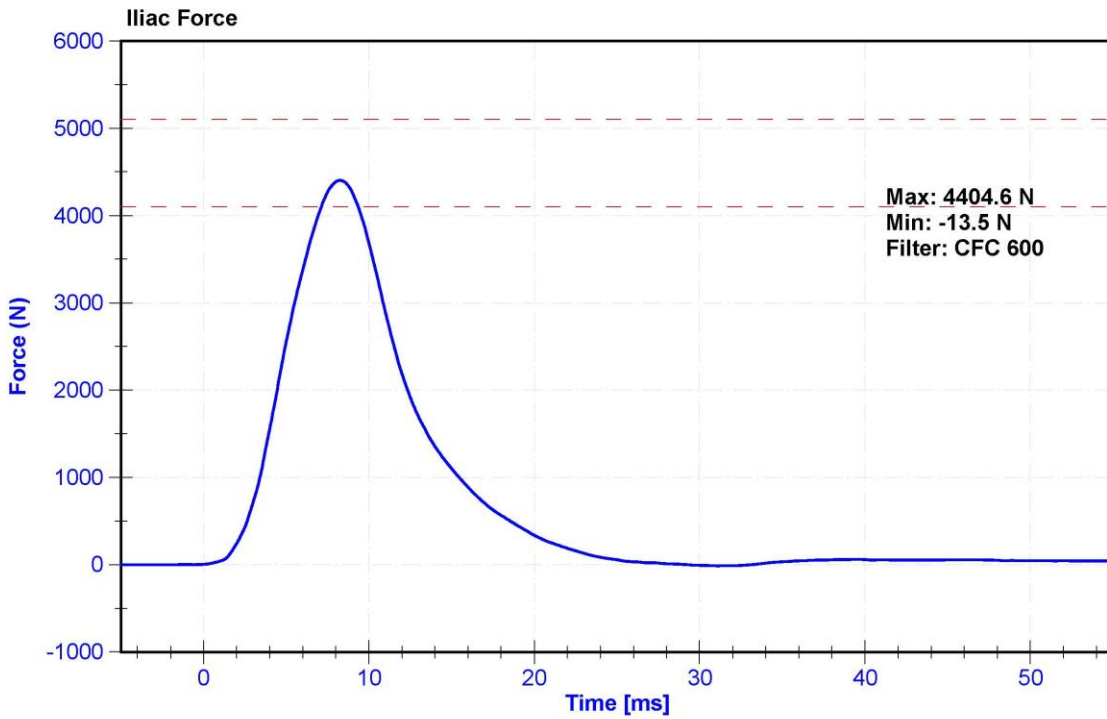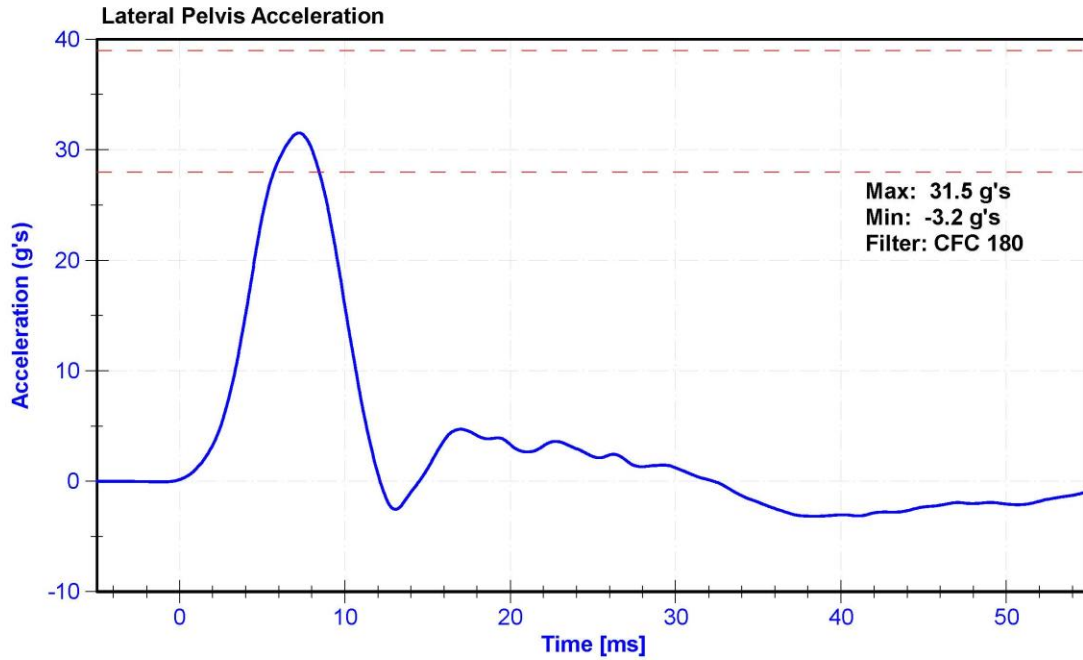

**CALIBRATION TEST RESULTS**

**POST-TEST**

**SID-IIS 5<sup>TH</sup> PERCENTILE FEMALE - DRIVER ATD**

**SERIAL NO: DG8012**

**(CONFIGURED FOR LEFT SIDE IMPACT)**






External Measurements - SID-IIs

Technician: K. Dutton

Date: 05/29/2019

Dummy Serial Number: DG8012

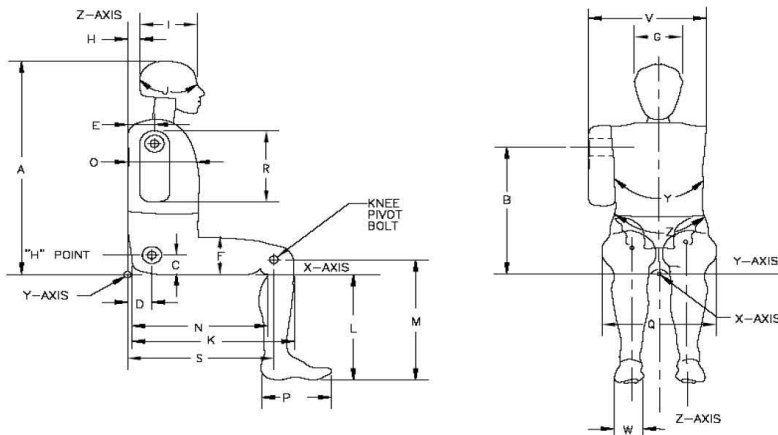

Symbol	Description	Specification (mm)		Result (mm)	Pass/Fail
A	Sitting Height	772	788	779	Pass
B	Shoulder Pivot Height	437	453	446	Pass
C	H-point Height	79	89	85	Pass
D	H-point from seatback	141	151	146	Pass
E	Shoulder Pivot from Backline	97	107	102	Pass
F	Thigh Clearance	119	135	127	Pass
G	Head Breadth	140	148	143	Pass
H	Head Back from Backline	40	46	44	Pass
I	Head Depth	178	188	185	Pass
J	Head Circumference	541	551	547	Pass
K	Buttock to Knee Length	514	540	531	Pass
L	Popliteal Height	343	369	356	Pass
M	Knee Pivot to floor height	392	409	402	Pass
N	Buttock Popliteal Length	416	442	433	Pass
O	Chest Depth w/o jacket	195	211	205	Pass
P	Foot Length	216	232	223	Pass
Q	Hip Breadth (w/pelvic plugs)	313	323	318	Pass
R	Arm Length	249	259	253	Pass
S	Knee Joint to seatback	477	493	486	Pass
V	Shoulder Width	341	357	345	Pass
W	Foot Width	78	94	85	Pass
Y	Chest Circumference w/jacket	851	881	867	Pass
Z	Waist Circumference	761	791	781	Pass


ATD Manufacturer	FTSS	Test Technician	C. Mantell
ATD Serial Number	DG8012	Laboratory Supervisor	K. Brogan




**Results**

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	20.8	Pass
Humidity	10	70	%	21.8	Pass
Resultant Acceleration	115	137	g's	129.4	Pass
Oscillation	0	15	%	1.4	Pass
Fore-Aft Acceleration	-15	15	g's	-2.3	Pass

**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
X Accelerometer	ENDEVCO 7264	AC-P74788	4/11/2019	10/10/2019
Y Accelerometer	ENDEVCO 7264CT	AC-P83432	4/11/2019	10/10/2019
Z Accelerometer	ENDEVCO 7264	AC-P83319	4/11/2019	10/10/2019

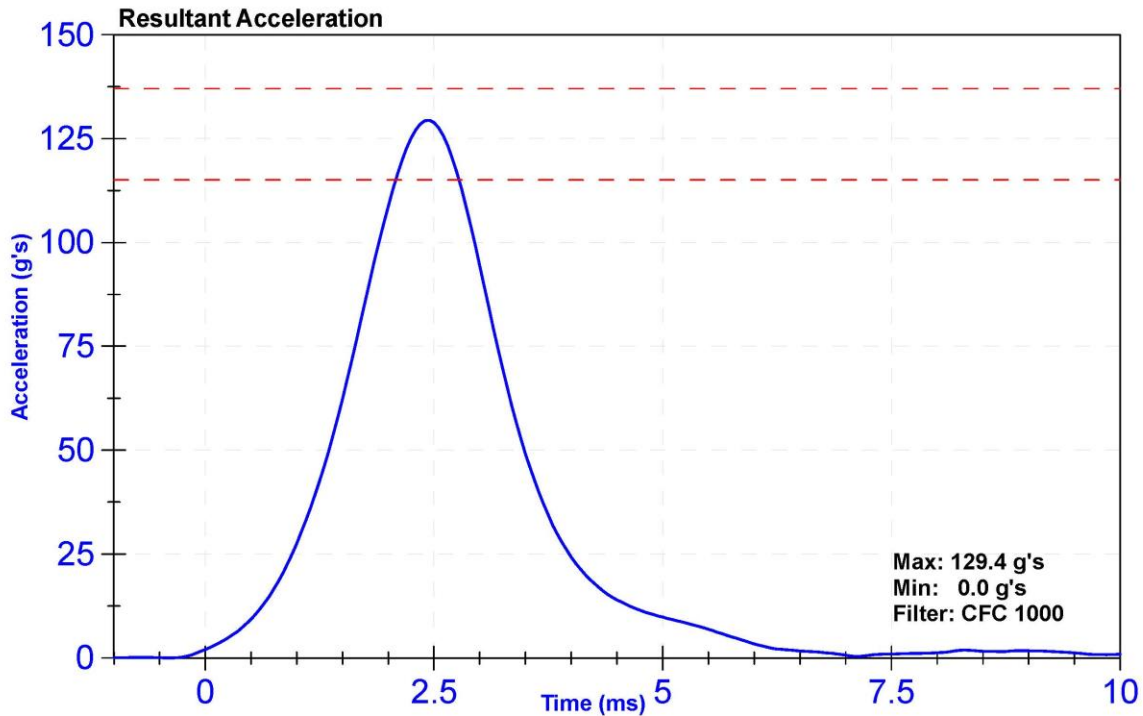

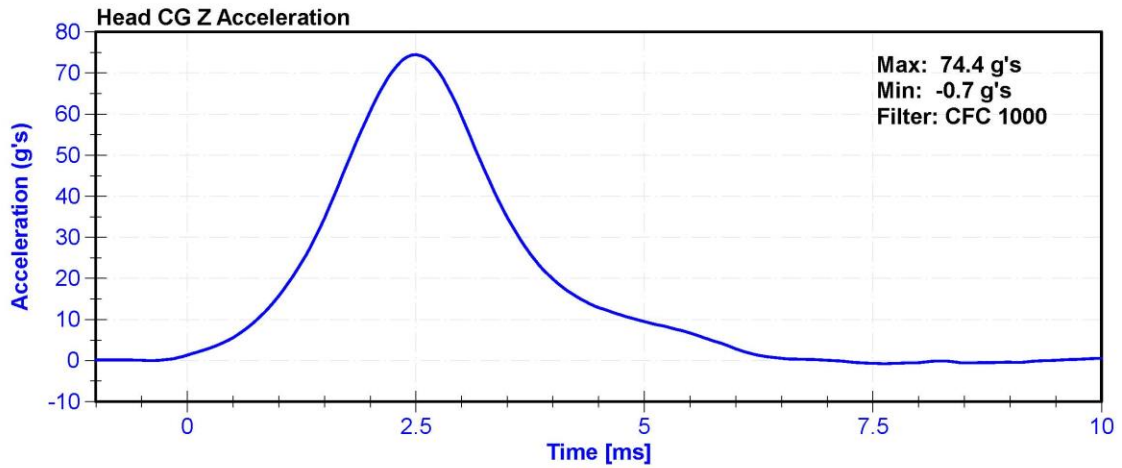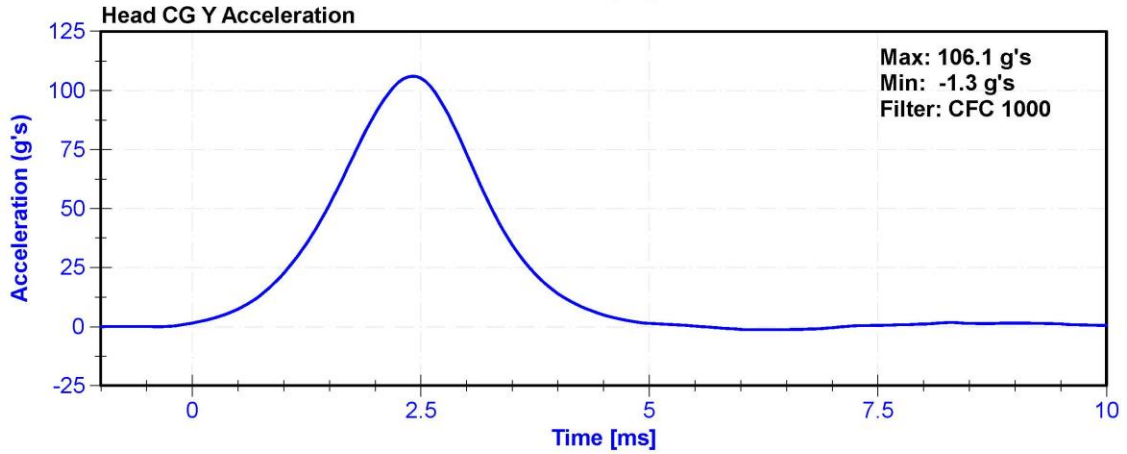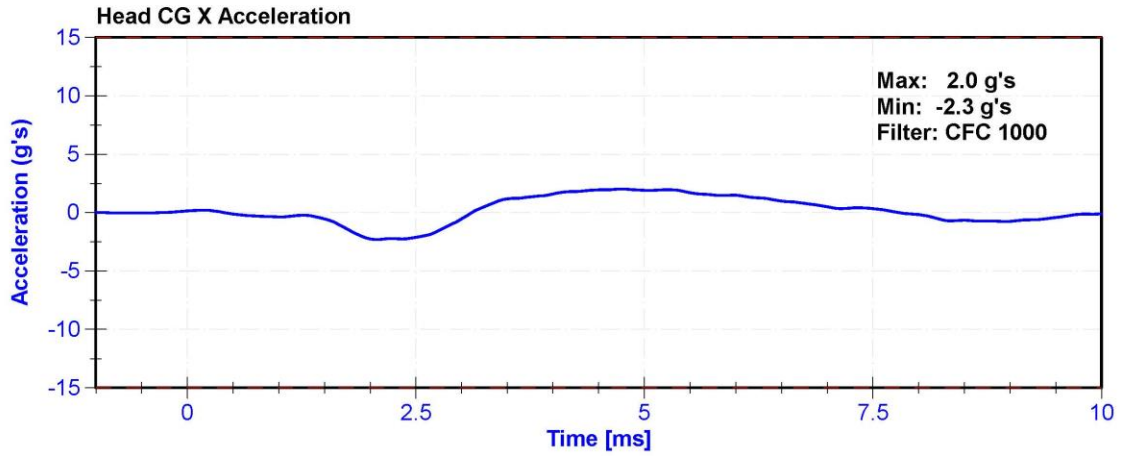


ATD Manufacturer	FTSS	Test Technician	C. Mantell
ATD Serial Number	DG8012	Laboratory Supervisor	K. Brogan

**Results**



Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21.1	Pass
Humidity	10	70	%	59.9	Pass
Velocity	5.51	5.63	m/s	5.549	Pass
Pendulum Impulse at 10ms	2.2	2.8	m/s	2.39	Pass
Pendulum Impulse at 15ms	3.3	4.1	m/s	3.54	Pass
Pendulum Impulse at 20ms	4.4	5.4	m/s	4.78	Pass
Pendulum Impulse at 25ms	5.4	6.1	m/s	5.76	Pass
Pendulum Impulse from 25 to 100ms	5.5	6.2	m/s	6.03	Pass
Neck Rotation	71	81	deg	79.2	Pass
Time at Maximum Rotation	50	70	ms	61.3	Pass
Moment about the OC	36	44	Nm	43.1	Pass
Moment Decay to 0 Nm	102	126	ms	116.2	Pass

**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	ENDEVCO 7231CT	AC-AH5M9 Pend	1/29/2019	1/29/2020
Pendulum Potentiometer	Denton 78051-342	DS-184Pend	11/1/2018	11/1/2019
Condyle Potentiometer	Denton 78051-342	DS-185Pend	11/1/2018	11/1/2019
Upper Neck Load Cell	Denton 1716	LC-2018 FY	9/28/2018	9/28/2019

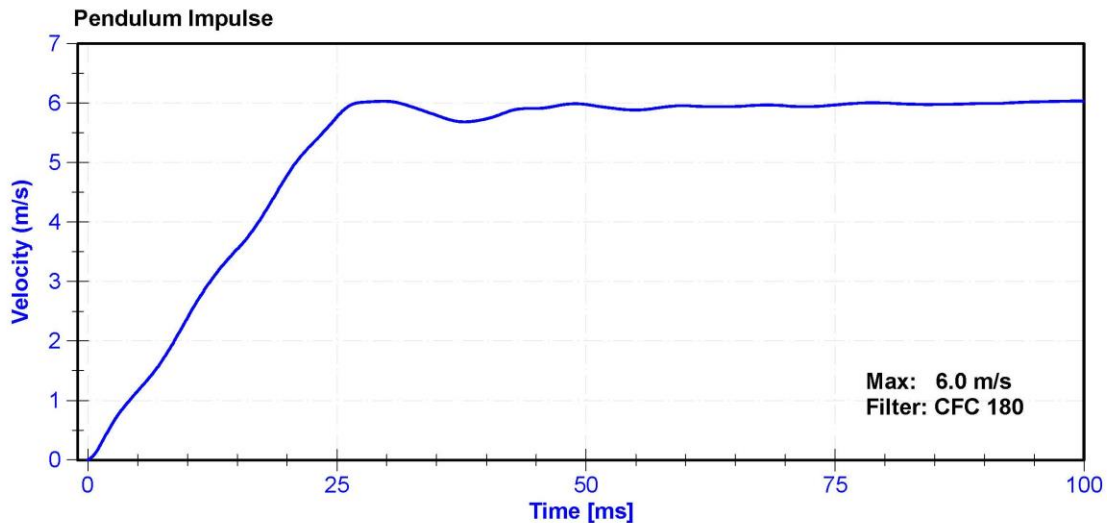



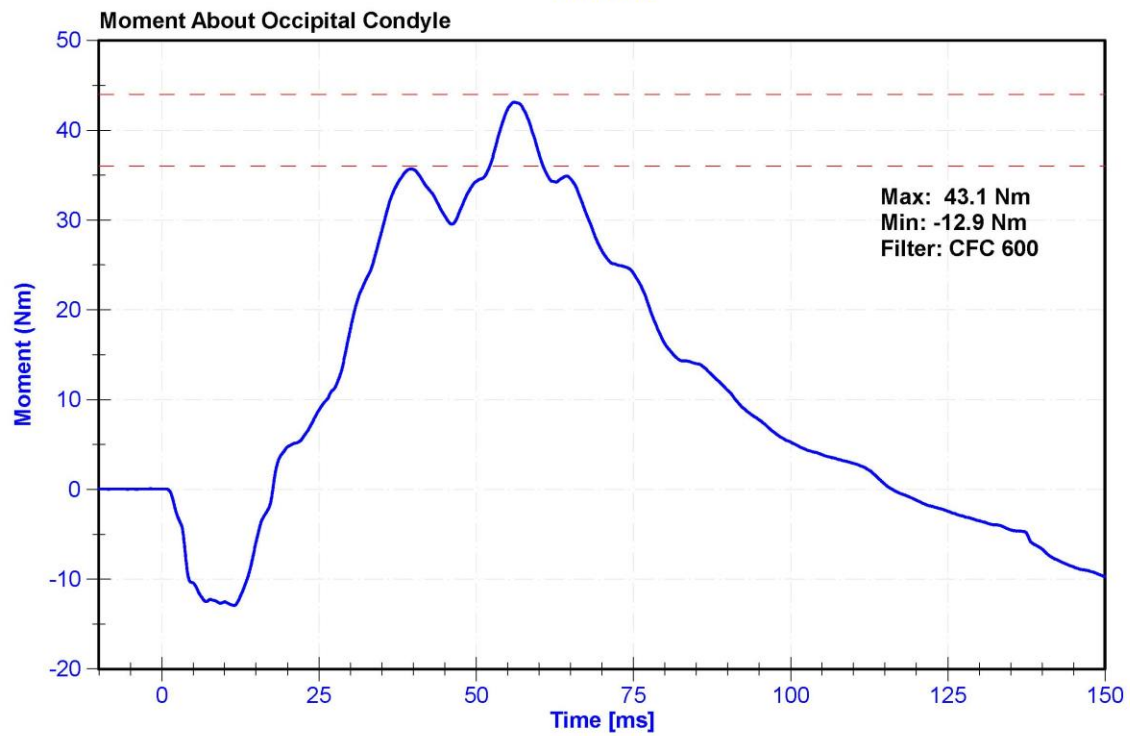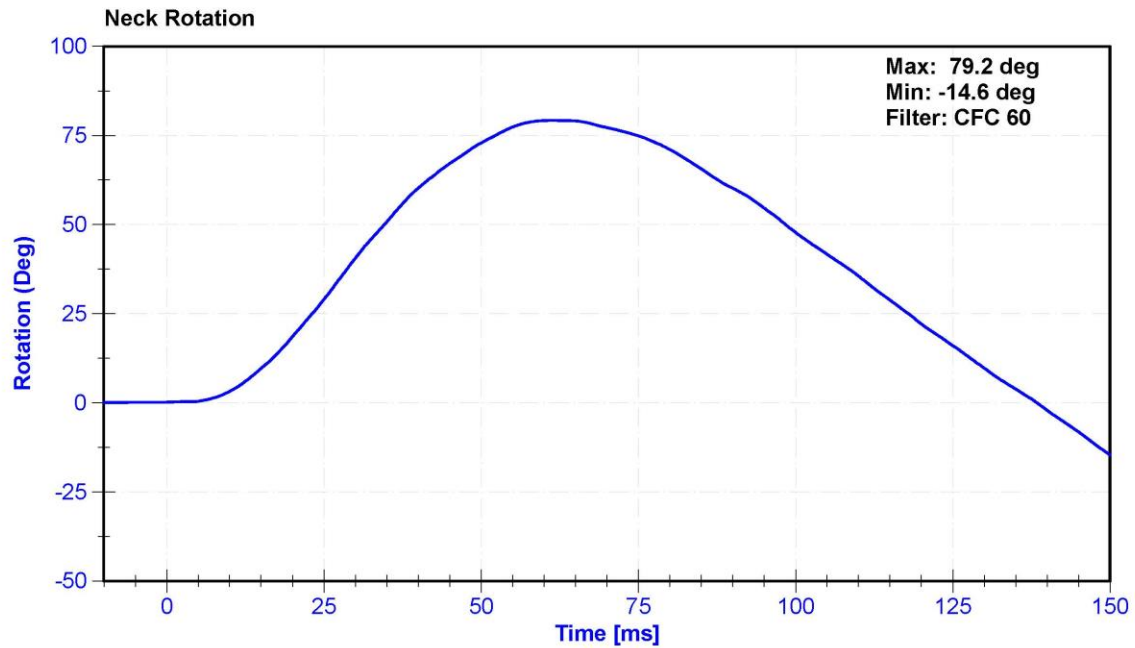


ATD Manufacturer	FTSS	Test Technician	D.Reinhard
ATD Serial Number	DG8012	Laboratory Supervisor	K. Brogan



**Results**

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	20.9	Pass
Humidity	10	70	%	21.6	Pass
Velocity	4.2	4.4	m/s	4.36	Pass
Probe Acceleration	13	18	g's	15.8	Pass
Shoulder Deflection	28	37	mm	28.7	Pass
Lateral Upper Spine Acceleration	17	22	g's	20.2	Pass

**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	ENDEVCO 7264CT	AC-P71278	12/14/2018	12/14/2019
Shoulder Potentiometer	Servo 08TC1-3745	DS-1845GFE	10/11/2018	10/11/2019
Upper Spine Y Accelerometer	ENDEVCO 7264CT	AC-P64148	4/9/2019	10/8/2019

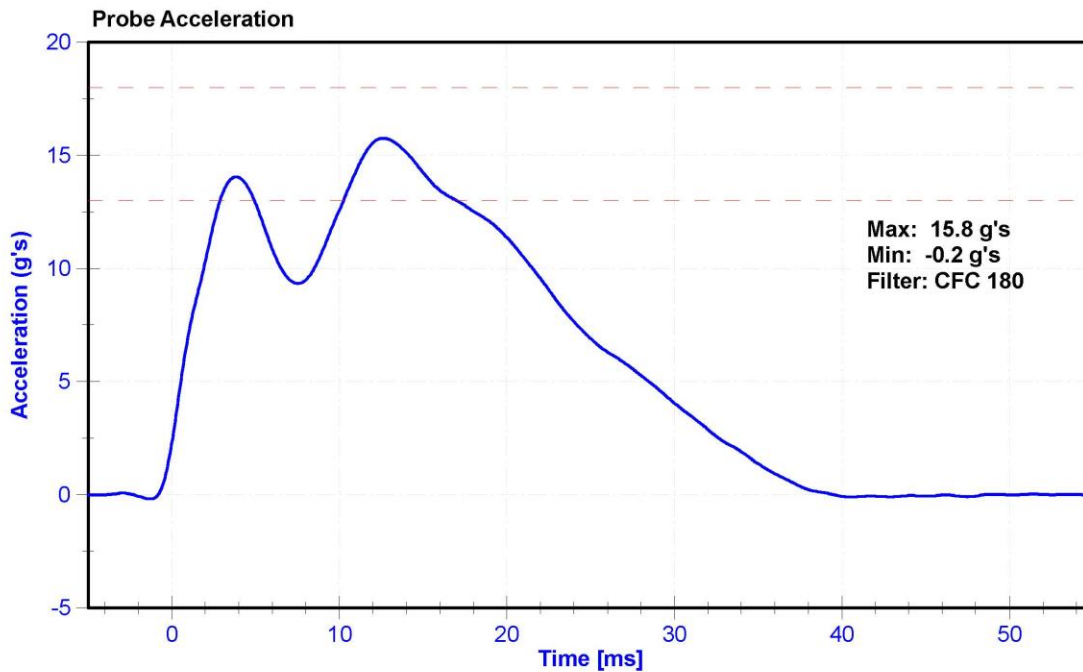

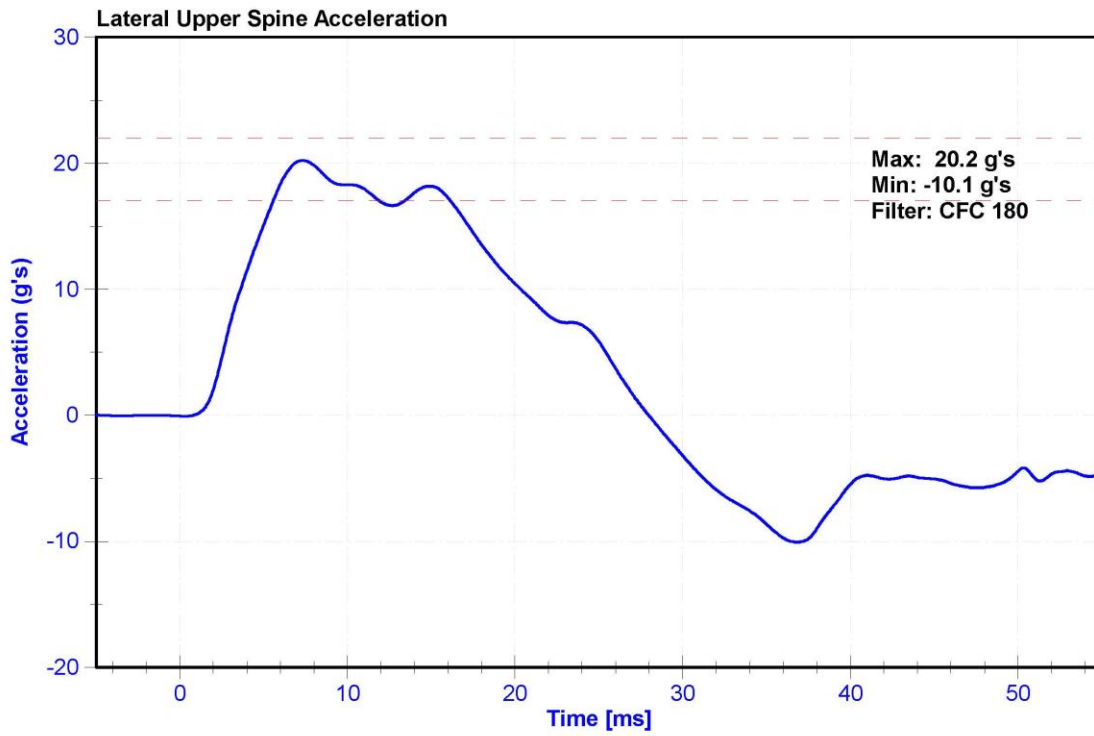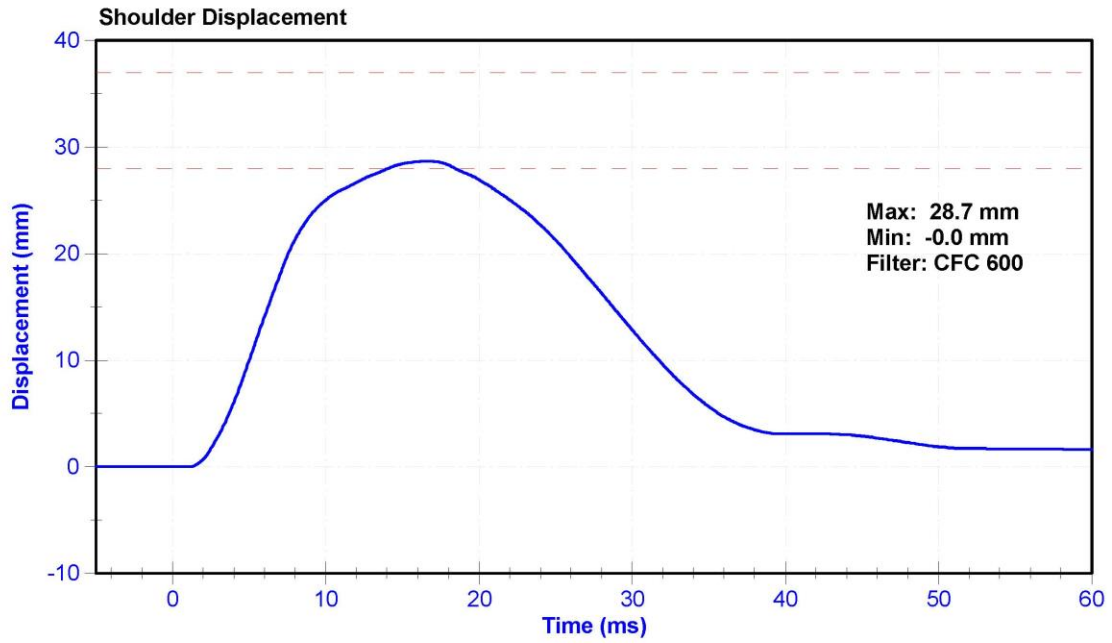


ATD Manufacturer	FTSS	Test Technician	D.Reinhard
ATD Serial Number	DG8012	Laboratory Supervisor	K. Brogan

**Results**


Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	22.1	Pass
Humidity	10	70	%	62.9	Pass
Velocity	6.6	6.8	m/s	6.74	Pass
Probe Acceleration after 5 ms	30	36	g's	32.6	Pass
Lateral Upper Spine Acceleration	34	43	g's	36.8	Pass
Lateral Lower Spine Acceleration	29	37	g's	32.4	Pass
Shoulder Deflection	31	40	mm	33.5	Pass
Upper Thorax Rib Deflection	25	32	mm	28.5	Pass
Mid Thorax Rib Deflection	30	36	mm	33.1	Pass
Lower Thorax Rib Deflection	32	38	mm	35.1	Pass



**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	ENDEVCO 7264CT	AC-P71278	12/14/2018	12/14/2019
Upper Spine T1 Y Accelerometer	ENDEVCO 7264CT	AC-P64148	4/9/2019	10/8/2019
Upper Spine T12 Y Accelerometer	ENDEVCO 7264CT	AC-P51699	4/9/2019	10/8/2019
Shoulder Potentiometer	Servo 08TC1-3745	DS-1845GFE	10/11/2018	10/11/2019
Upper Thorax Rib Potentiometer	Servo 1246	DS-2165GFE	5/21/2019	5/20/2020
Middle Thorax Rib Potentiometer	Servo 08TC1-3621	DS-45 GFE	10/12/2018	10/12/2019
Lower Thorax Rib Potentiometer	Servo 08TC1-3787	DS-011GFE	10/12/2018	10/12/2019

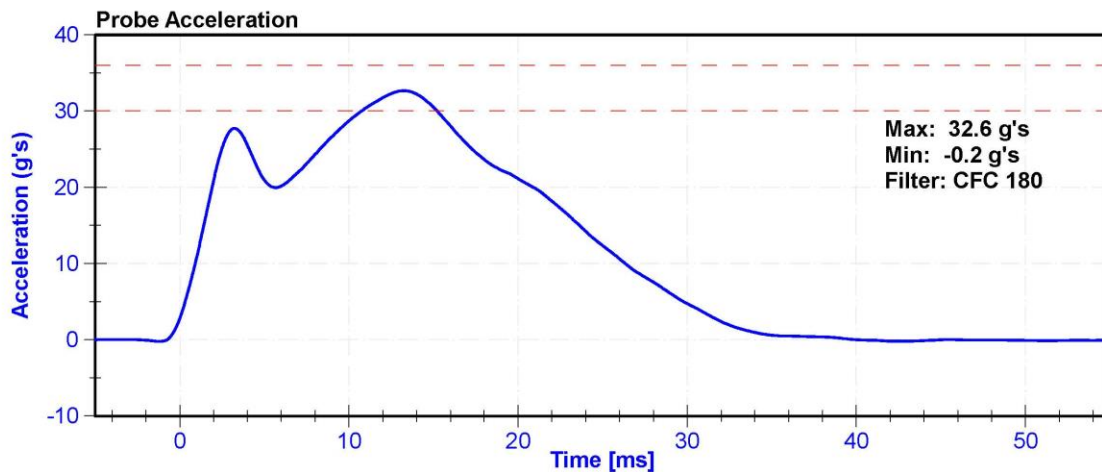



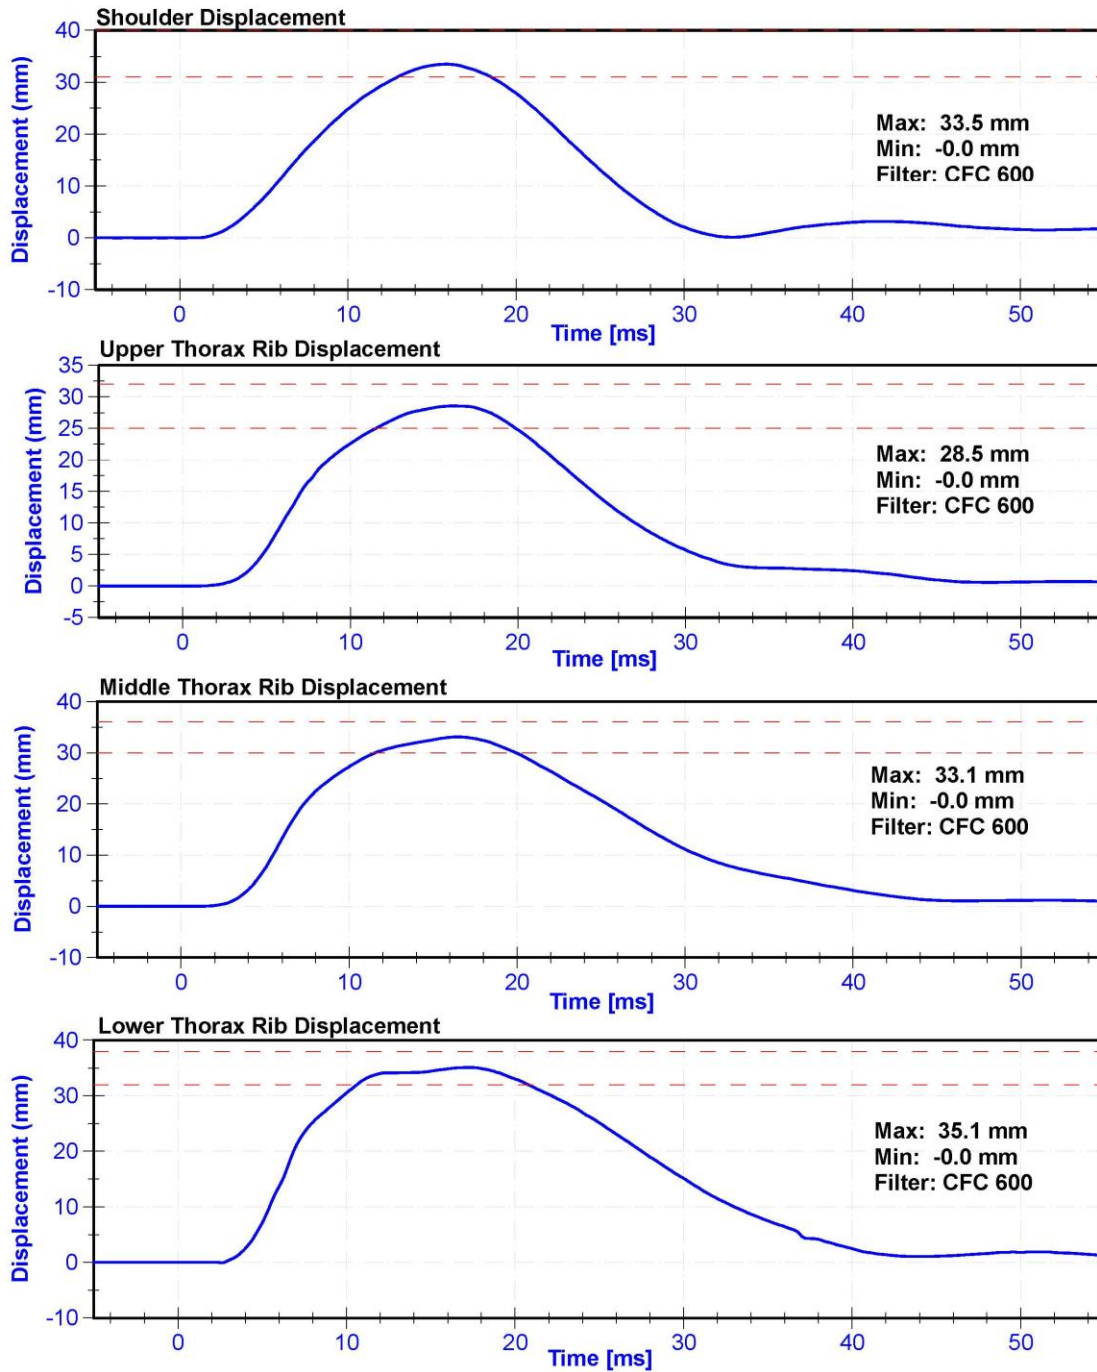

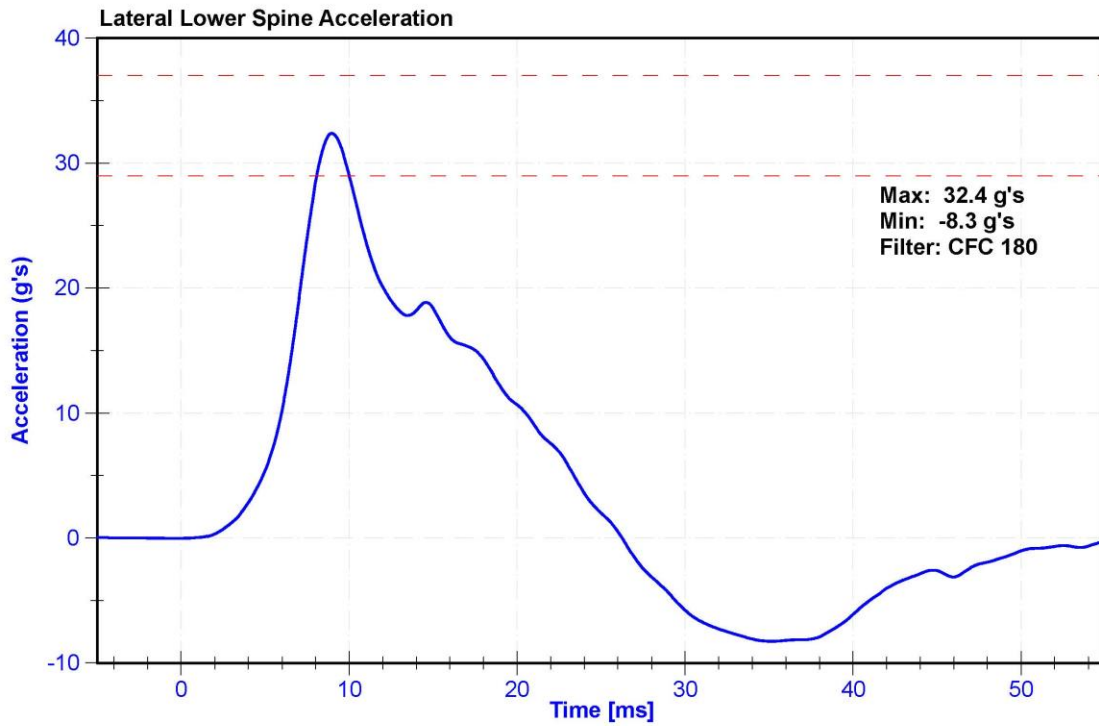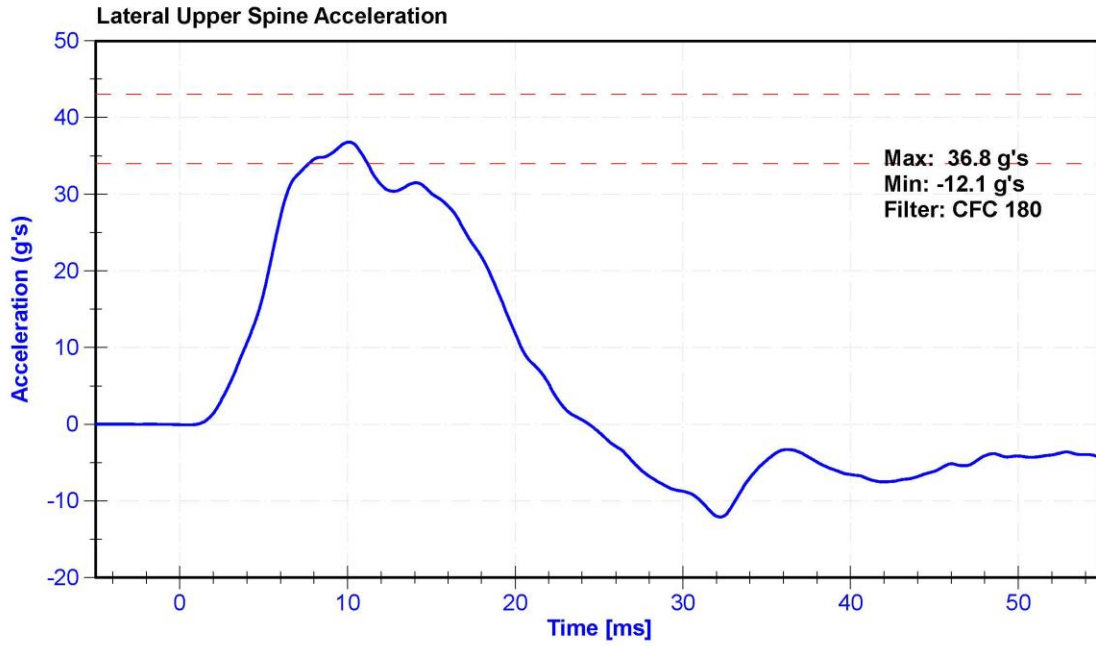


ATD Manufacturer	FTSS	Test Technician	D.Reinhard
ATD Serial Number	DG8012	Laboratory Supervisor	K. Brogan




**Results**

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	22.1	Pass
Humidity	10	70	%	62.9	Pass
Velocity	4.2	4.4	m/s	4.34	Pass
Probe Acceleration	14	18	g's	16.0	Pass
Lateral Upper Spine Acceleration	13	17	g's	14.6	Pass
Lateral Lower Spine Acceleration	7	11	g's	9.3	Pass
Upper Thorax Rib Deflection	32	40	mm	36.5	Pass
Middle Thorax Rib Deflection	39	45	mm	42.0	Pass
Lower Thorax Rib Deflection	35	43	mm	39.1	Pass



**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	ENDEVCO 7264CT	AC-P71278	12/14/2018	12/14/2019
Upper Spine Y Accelerometer	ENDEVCO 7264CT	AC-P64148	4/9/2019	10/8/2019
Lower Spine Y Accelerometer	ENDEVCO 7264CT	AC-P51699	4/9/2019	10/8/2019
Upper Thorax Rib Potentiometer	Servo 1246	DS-2165GFE	5/21/2019	5/20/2020
Middle Thorax Rib Potentiometer	Servo 08TC1-3621	DS-45 GFE	10/12/2018	10/12/2019
Lower Thorax Rib Potentiometer	Servo 08TC1-3787	DS-011GFE	10/12/2018	10/12/2019

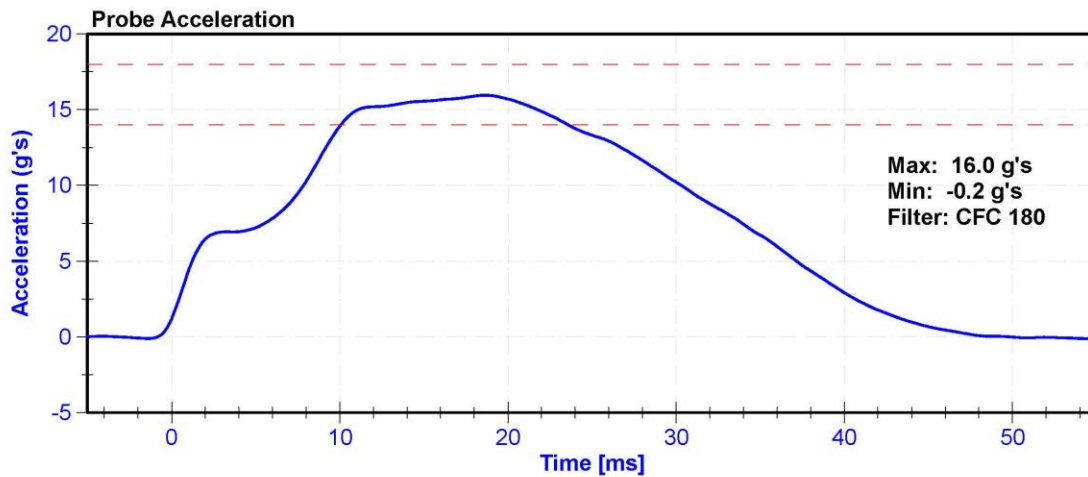

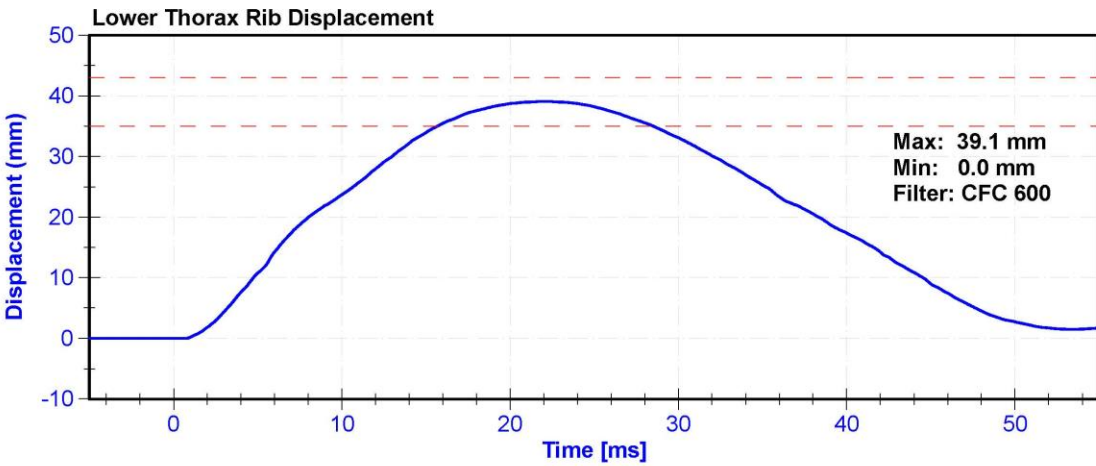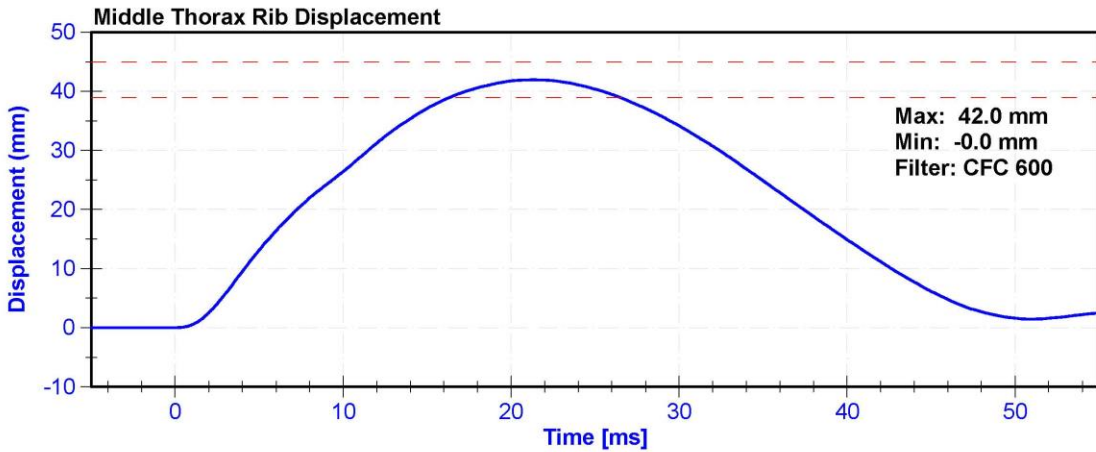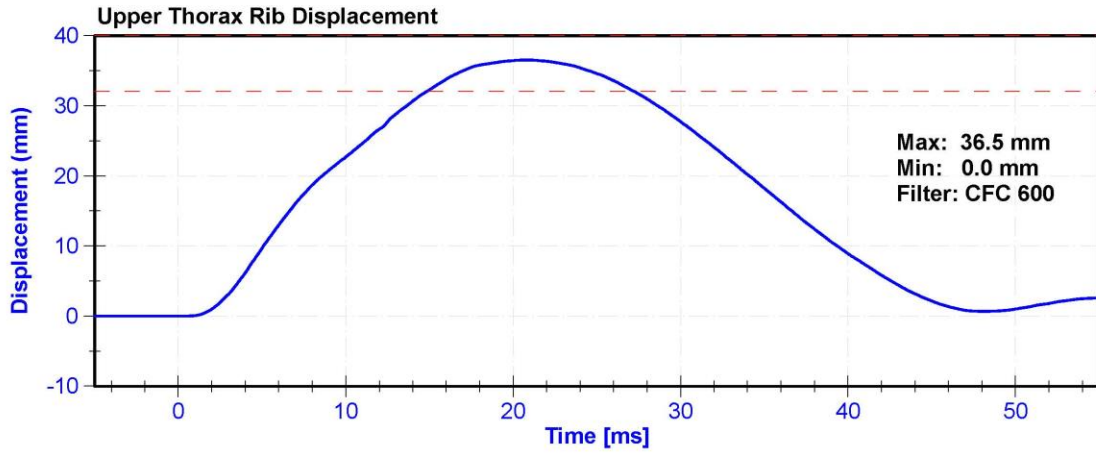



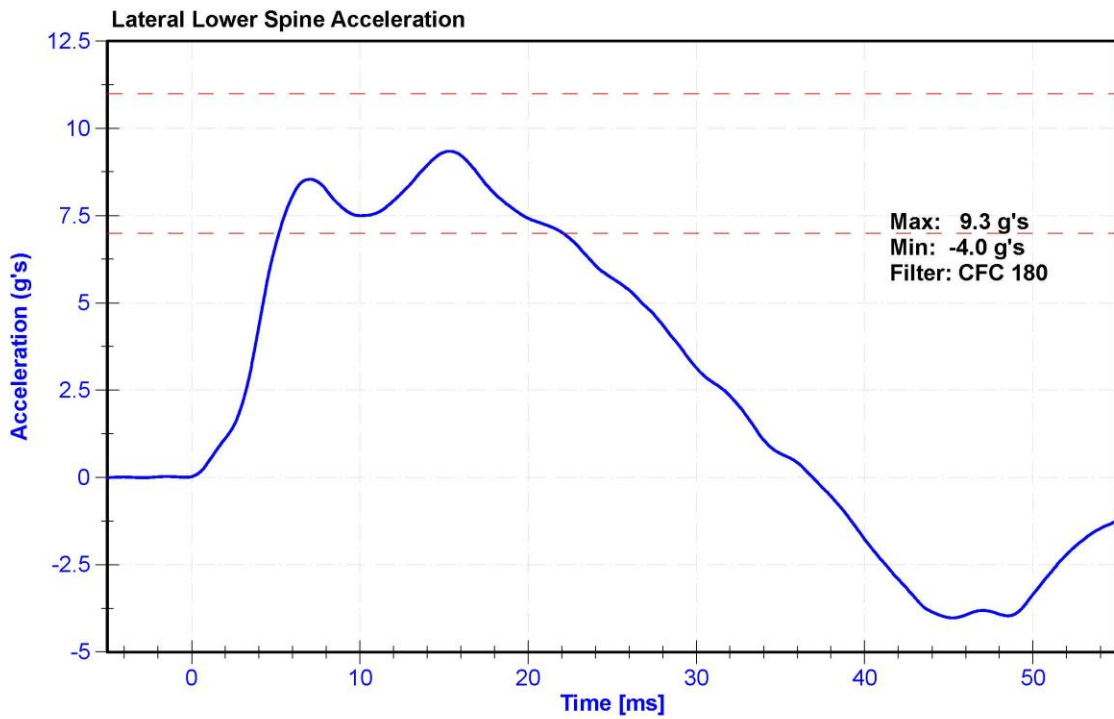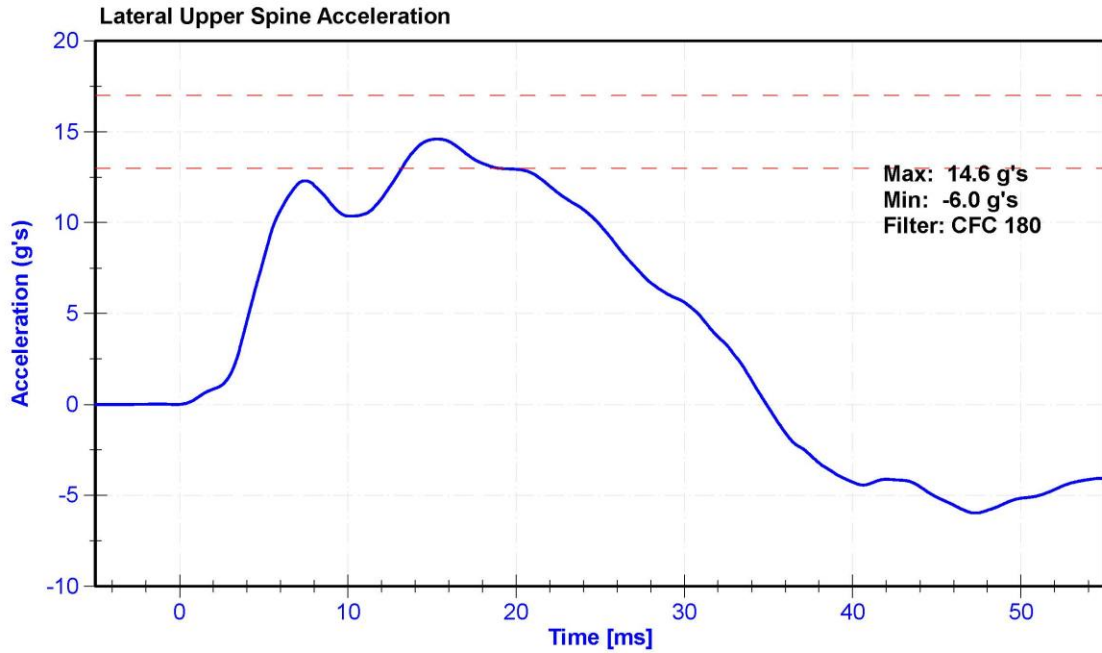


ATD Manufacturer	FTSS	Test Technician	D.Reinhard
ATD Serial Number	DG8012	Laboratory Supervisor	K. Brogan



**Results**


Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	22.1	Pass
Humidity	10	70	%	63.2	Pass
Velocity	4.2	4.4	m/s	4.34	Pass
Probe Acceleration	12	16	g's	13.3	Pass
Lateral Lower Spine Acceleration	9	14	g's	9.1	Pass
Upper Abdomen Rib Deflection	36	47	mm	46.0	Pass
Lower Abdomen Rib Deflection	33	44	mm	43.6	Pass

**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Probe Accelerometer	ENDEVCO 7264CT	AC-P71278	12/14/2018	12/14/2019
Lower Spine Y Accelerometer	ENDEVCO 7264CT	AC-P51699	4/9/2019	10/8/2019
Upper Abdomen Rib Potentiometer	Servo 08TC1-3725	DS-008GFE	10/11/2018	10/11/2019
Lower Abdomen Rib Potentiometer	Servo 08TC1-3745	DS-1774GFE	10/12/2018	10/12/2019

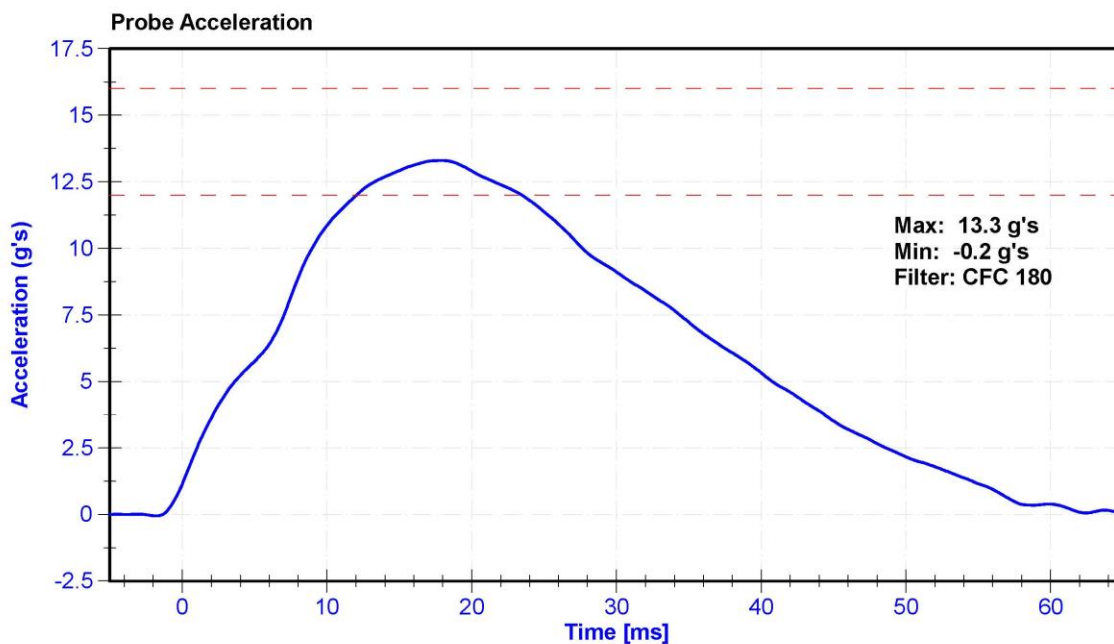

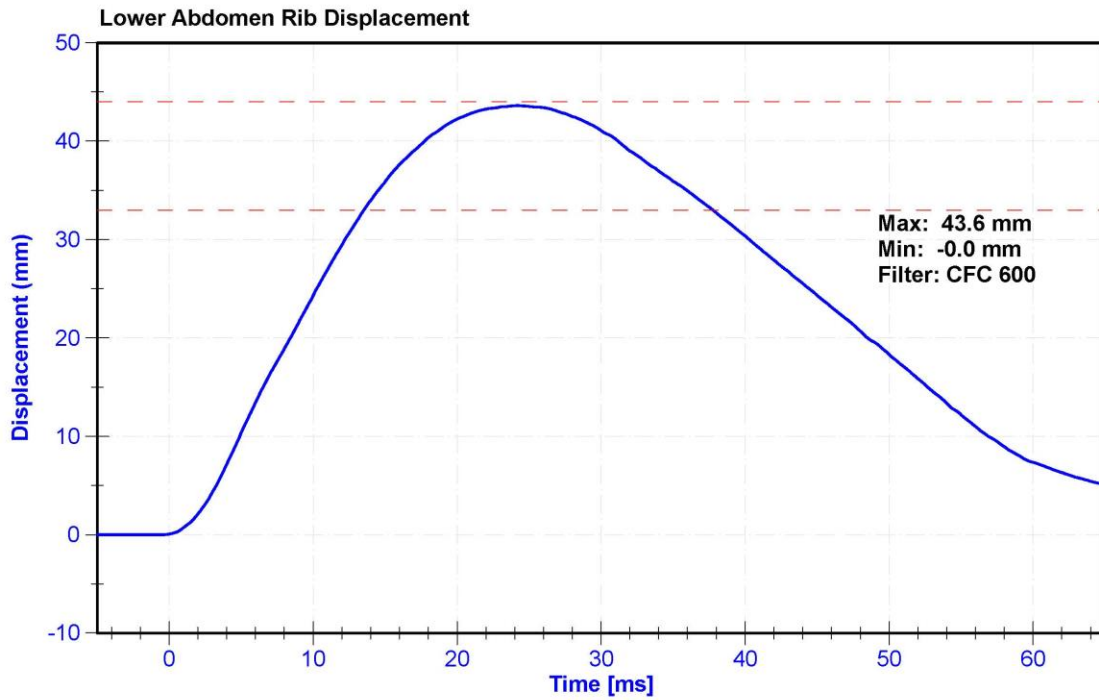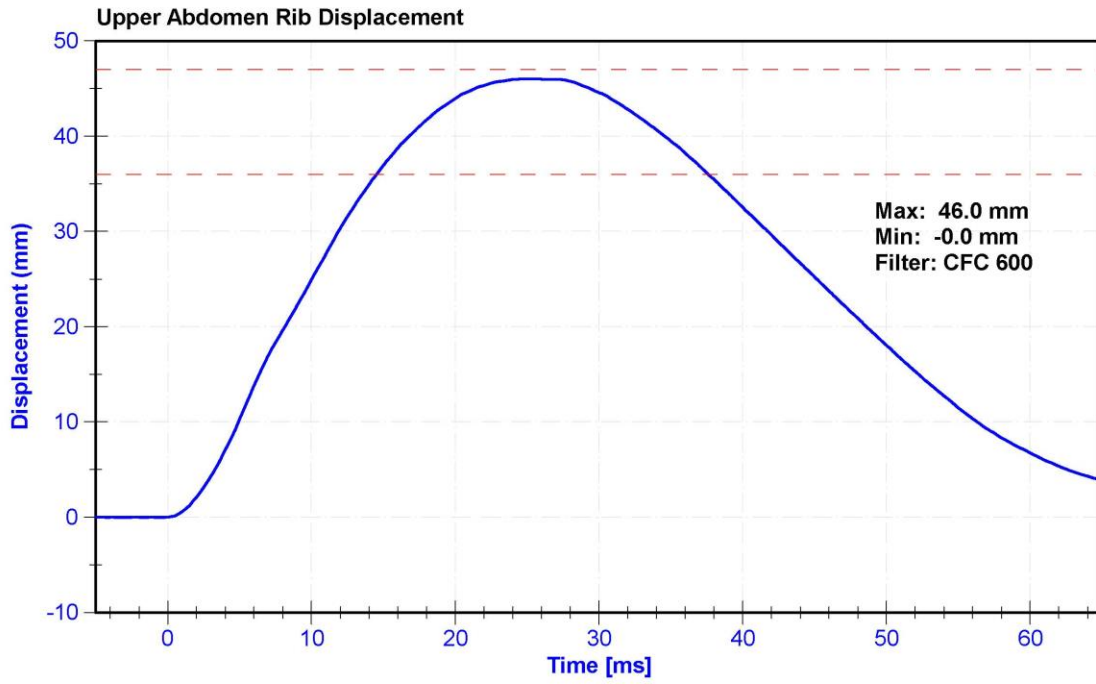

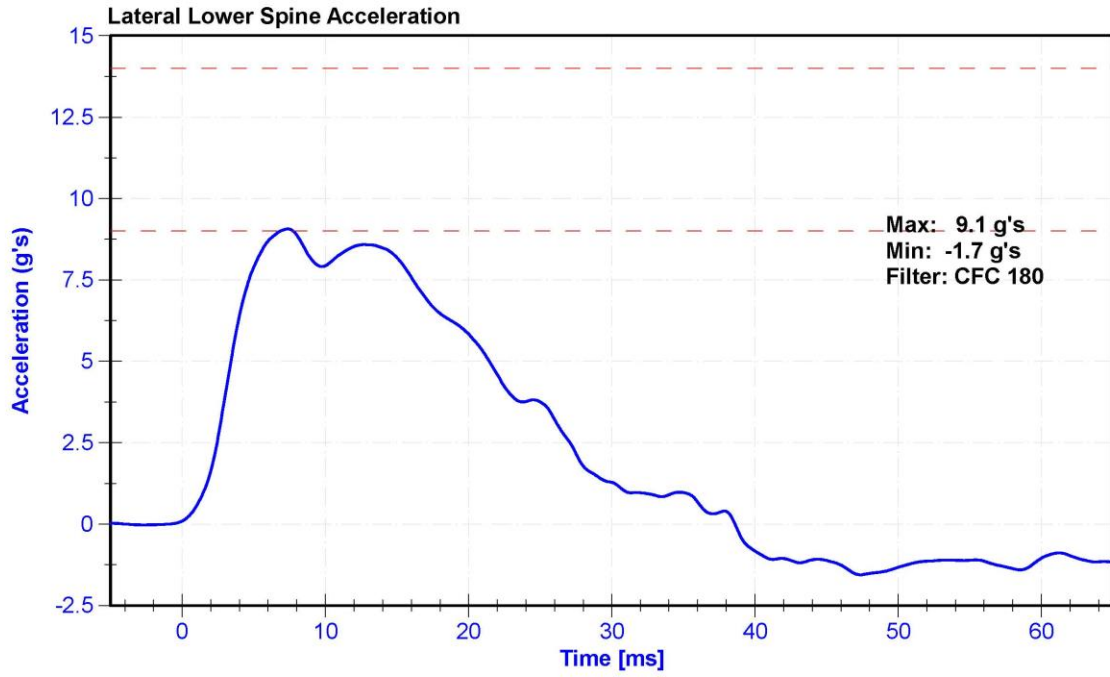




ATD Manufacturer	FTSS	Test Technician	D.Reinhard
ATD Serial Number	DG8012	Laboratory Supervisor	K. Brogan



**Results**

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	22.1	Pass
Humidity	10	70	%	64	Pass
Velocity	6.6	6.8	m/s	6.64	Pass
Probe Acceleration	38	47	g's	47.0	Pass
Lateral Pelvis Acceleration after 6ms	34	42	g's	41.7	Pass
Acetabulum Force	3600	4300	N	3857.1	Pass

**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	ENDEVCO 7264CT	AC-P71278	12/14/2018	12/14/2019
Pelvis Y Accelerometer	ENDEVCO 7264CT	AC-P51875	4/11/2019	10/10/2019
Acetabulum Load Cell	Denton 3249J	LC-4986Fy	6/4/2018	6/4/2019
Certification Plug	SACO	11642	10/20/2017	N/A
Crash Test Plug	SACO	12389	3/23/2018	N/A

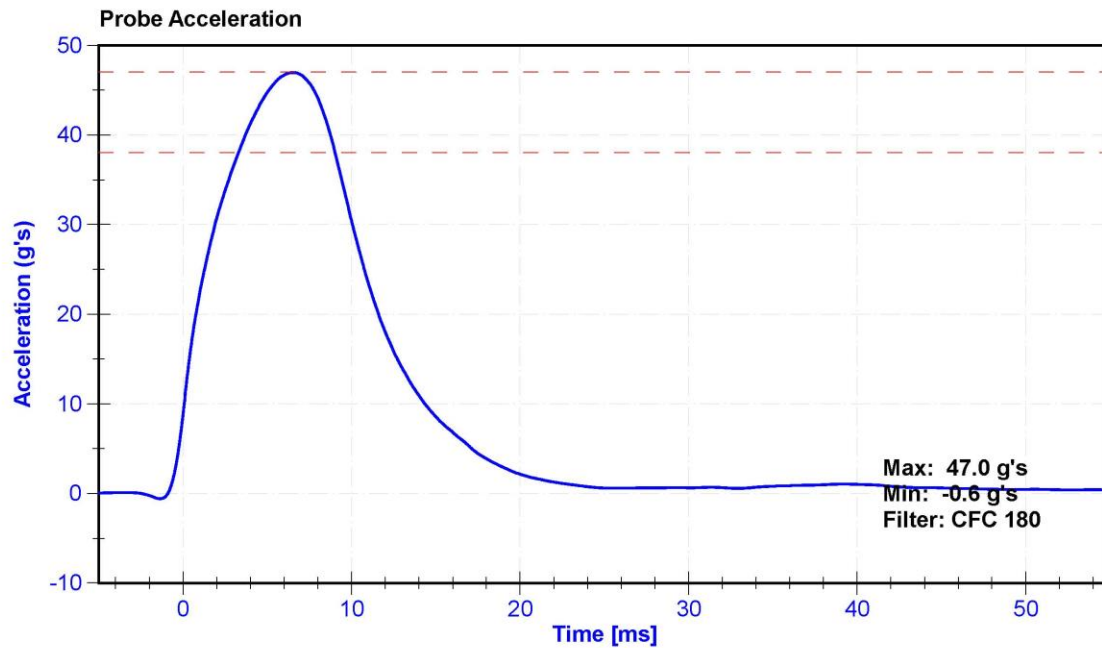

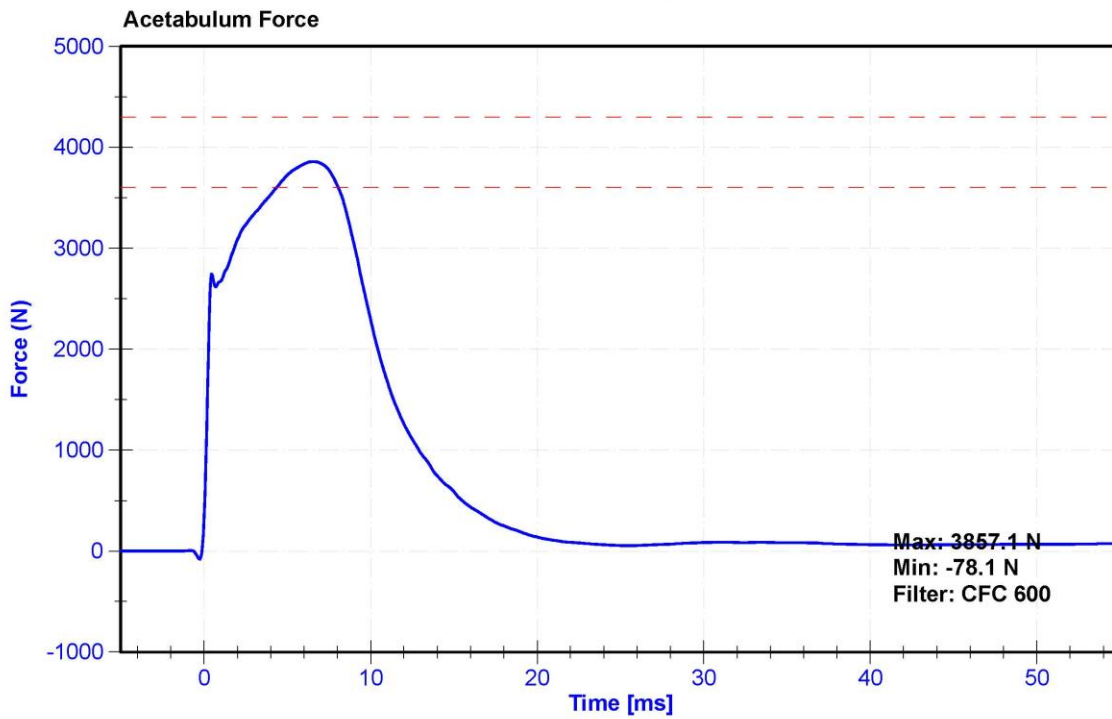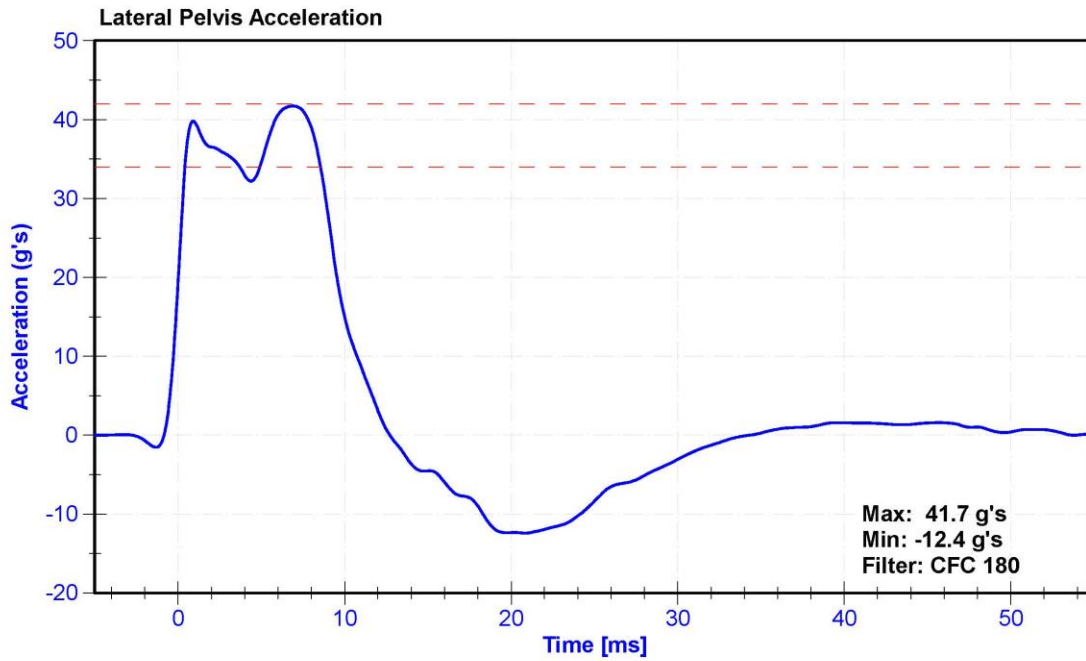



*DS 8012  
CRASH 5/29/19*


**SID-IIs Pelvis Plug Certification Test**

Force (-N) vs Extension (-mm)

Plug S/N 12389  
 Test Number 6777  
 Report Number 6792  
 Test Date 3/23/2018 10:11:15 AM

Test Results	Spec Min	Spec Max
Force @ 0.5 mm (N)	50.00	600.00
Force @ 1.5 mm (N)	850.00	1,400.00
Force @ 2.5 mm (N)	1,306.00	1,618.00
Force @ 3.0 mm (N)	1,391.00	1,673.00

Testing Machine STM-20 5965542  
 Load Cell S/N (F136947), Units (LBS) 1000  
 Crosshead Speed (mm / min) or Rate 12.7  
 Extension or Position Measured by XHD\_100 (XHD100)

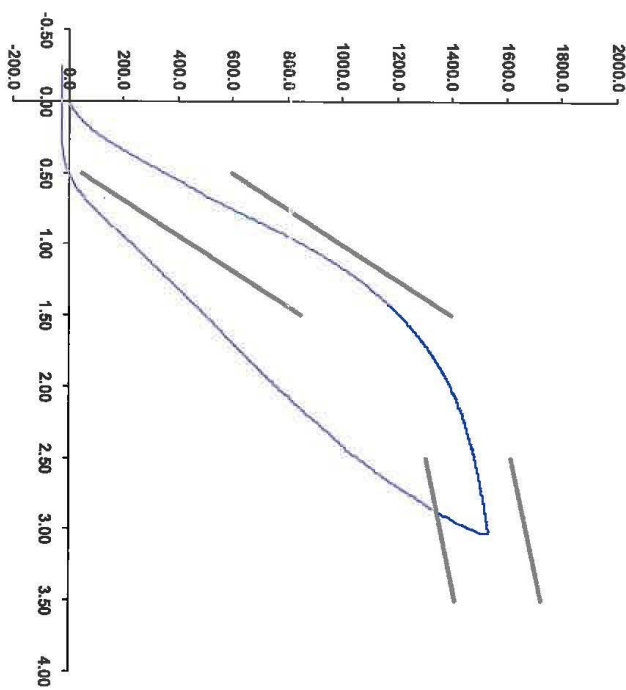

Operator

Part Number 180-4450

Template No 107 23-Mar-18  
 SACO Research

By: DC Date: 3/23/18  
 SACO Research 41735 Elm St, #401 Murrieta, CA 92562 Tel 310-894-2082 FAX




*DC88012  
Certify 5/29/19*

**SID-IIs Pelvis Plug Certification Test**

Plug S/N 11642  
 Test Number 5248  
 Report Number 5260  
 Test Date 10/20/2017 1:49:11 PM

Force (-N) vs Extension (-mm)

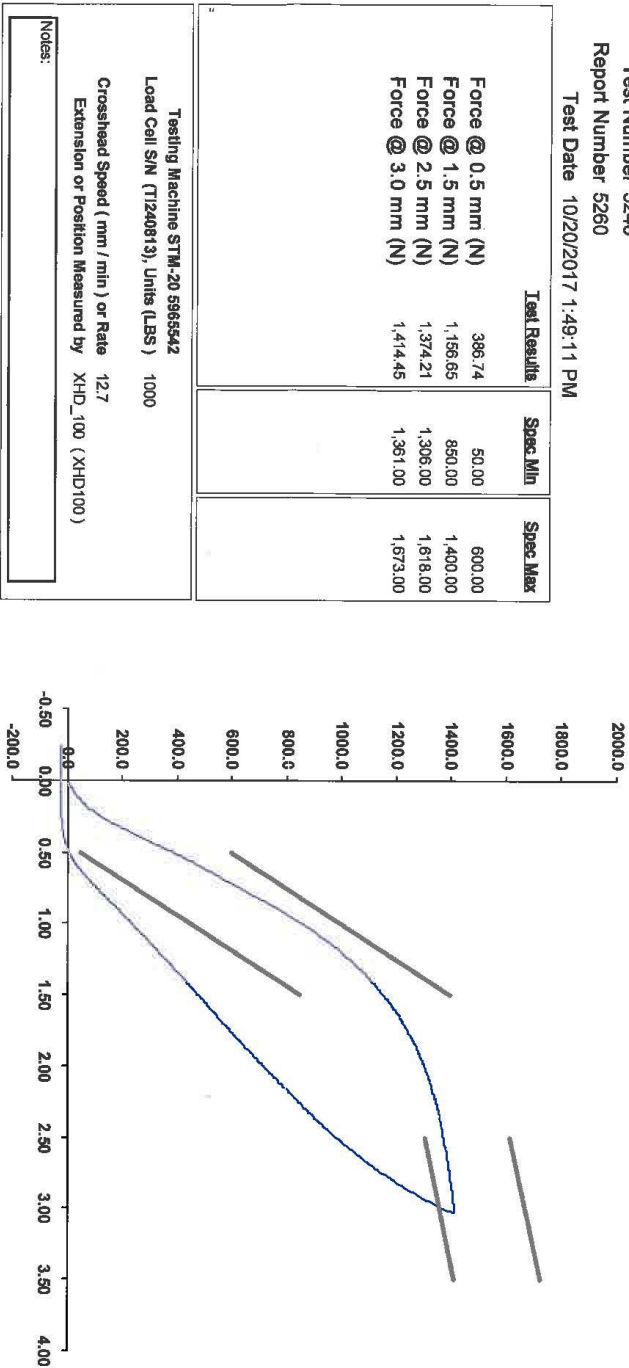

Notes:

Testing Machine STM-20 596542  
 Load Cell S/N (T1240813), Units (LBS) 1000  
 Crosshead Speed (mm / min ) or Rate 12.7  
 Extension or Position Measured by XHD\_100 (XHD100)

Operator DC

Part Number 180-4450

Template No 107 20-Oct-17  
 SACO Research

By: *DC* Date: *11/6/17*  
 SACO Research 41735 Elm St, #401 Murfreesboro, TN 37132  
 Tel 310-694-2082 FAX




ATD Manufacturer	FTSS	Test Technician	D.Reinhard
ATD Serial Number	DG8012	Laboratory Supervisor	K.Brogan



**Results**

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21.0	Pass
Humidity	10	70	%	62.1	Pass
Velocity	4.2	4.4	m/s	4.39	Pass
Probe Acceleration	36	45	g's	40.3	Pass
Lateral Pelvis Acceleration	28	39	g's	32.0	Pass
Iliac Force	4100	5100	N	4364.3	Pass

**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	ENDEVCO 7264CT	AC-P71278	12/14/2018	12/14/2019
Pelvis Y Accelerometer	ENDEVCO 7264CT	AC-P51875	4/11/2019	10/10/2019
Iliac Load Cell	DENTON 3228J	LC-279Fy	10/4/2018	10/4/2019

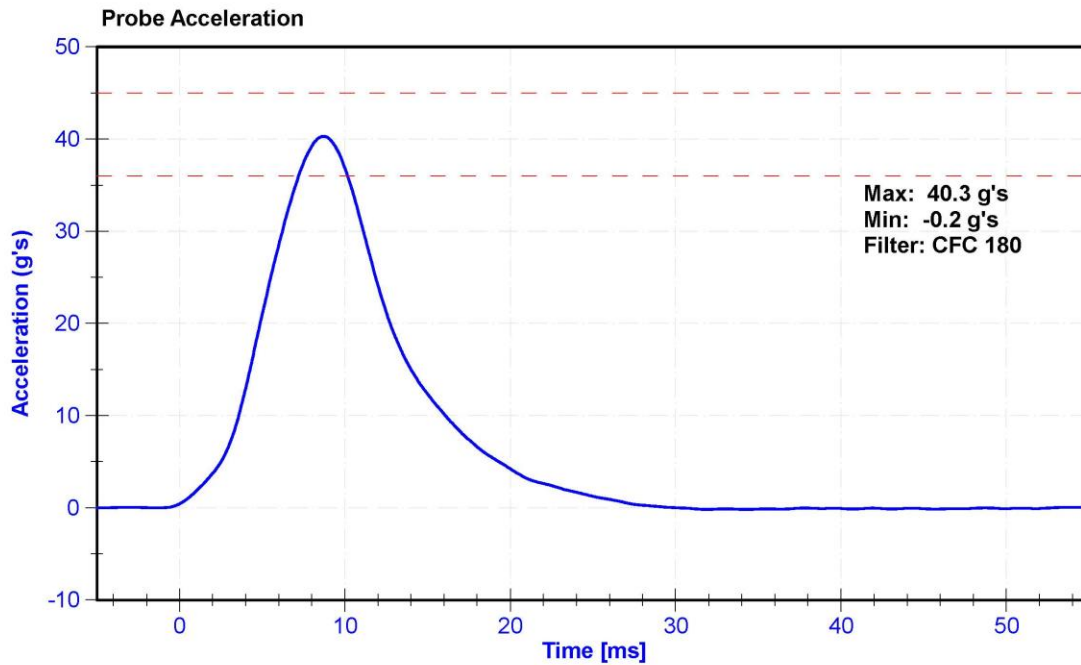

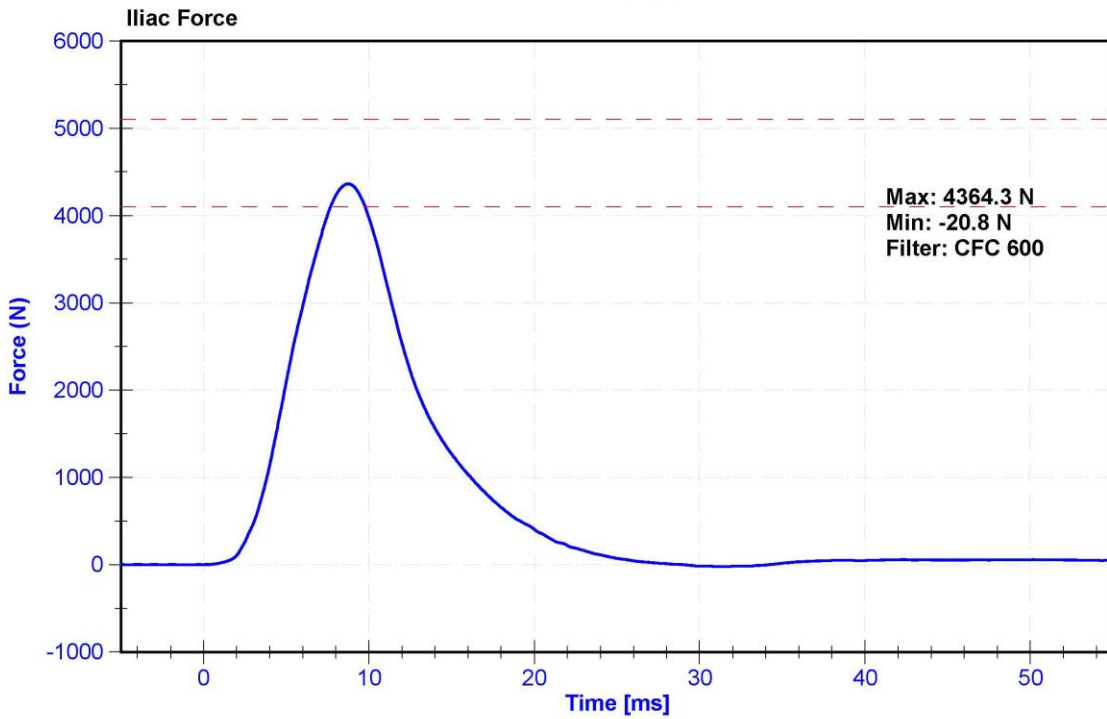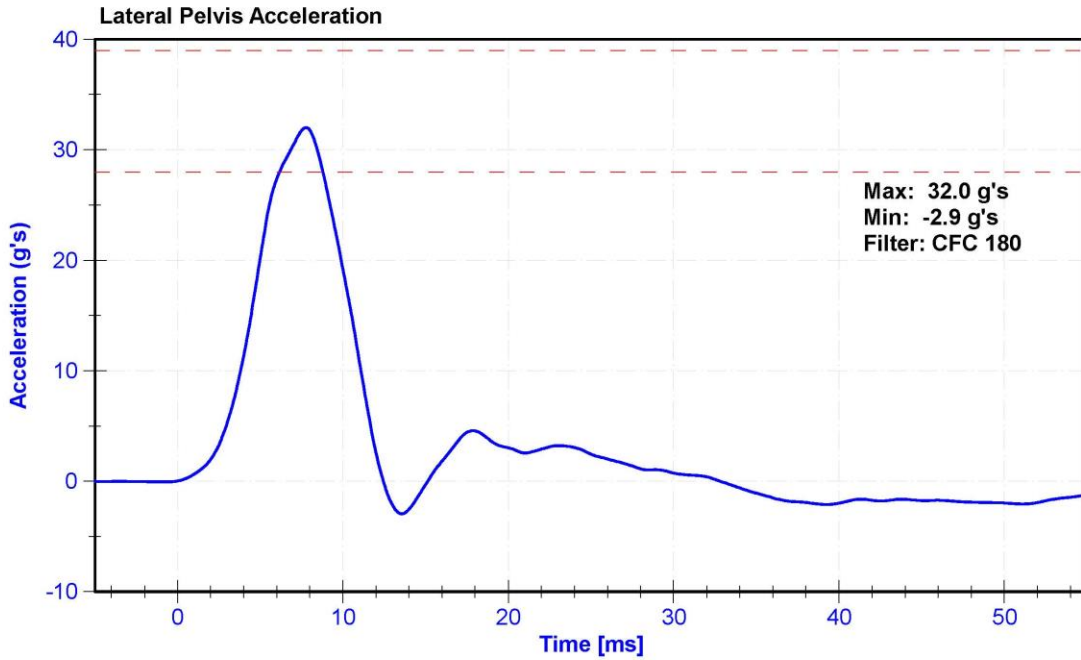

**APPENDIX D**

**TEST EQUIPMENT AND INSTRUMENTATION CALIBRATION DATA**

**Table 1 – Dummy Instrumentation (SID-IIs)**

				SID-IIs S/N: DG8012		
				Serial Number	Manufacturer	Calibration Date
Head Accelerometers		X	AC-P74788	ENDEVCO	4/11/2019	
		Y	AC-P83432	ENDEVCO	4/11/2019	
		Z	AC-P83319	ENDEVCO	4/11/2019	
Head Accelerometers - Redundant		X	AC-P80334	ENDEVCO	4/11/2019	
		Y	AC-P63841	ENDEVCO	4/11/2019	
		Z	AC-P83322	ENDEVCO	4/11/2019	
Displacement Potentiometer	Shoulder		Y			
	Thoracic Rib	Upper	Y	DS-2165GFE	Servo	5/21/2019
		Middle	Y	DS-45 GFE	Servo	10/12/2018
		Lower	Y	DS-011GFE	Servo	10/12/2018
	Abdominal Rib	Upper	Y	DS-008GFE	Servo	10/11/2018
		Lower	Y	DS-1774GFE	Servo	10/12/2018
Lower Spine Accelerometers (T12)		X	AC-P45019	ENDEVCO	4/9/2019	
		Y	AC-P51699	ENDEVCO	4/9/2019	
		Z	AC-P51685	ENDEVCO	4/9/2019	
Acetabulum Load Cell		Y	LC-4986Fy	Denton	6/4/2018	
Lilac Wing Load Cell		Y	LC-279Fy	Denton	10/4/2018	
Pelvis Plug (Struck Side)			12351	SACO	3/23/2018	
Pelvis Plug (Non-Struck Side)						



**Table 2 – Vehicle Instrumentation**

Vehicle Instrumentation		Serial Number	Manufacturer	Calibration Date
Vehicle Center of Gravity	X	AC-A222642	MSI 1201-1000	3/6/2019
Vehicle Center of Gravity	Y	AC-A250380	MSI 1201-1002	3/6/2019
Vehicle Center of Gravity	Z	AC-A262050	MSI 1201-1000	3/6/2019
Left Floor Sill	Y	AC-A280343	MSI 1201-1000	4/5/2019
A-Pillar Sill	Y	AC-A280890	MSI 1201-1000	3/21/2019
A-Pillar Low	Y	AC-A197054	MSI 1201-1000	2/27/2019
A-Pillar Mid	Y	AC-A217578	MSI 1201-1000	4/5/2019
B-Pillar Sill	Y	AC-A281008	MSI 1201-1000	4/23/2019
B-Pillar Low	Y	AC-A281007	MSI 1201-1000	3/21/2019
B-Pillar Mid	Y	AC-A280857	MSI 1201-1000	4/23/2019
Driver Seat	Y	AC-A280971	MSI 1201-1000	4/5/2019
Engine Top	X	AC-A280928	MSI 1201-1000	4/23/2019
Engine Top	Y	AC-A281012	MSI 1201-1000	4/23/2019
Firewall	Y	AC-A280886	MSI 1201-1000	3/22/2019
Right Roof	Y	AC-A281004	MSI 1201-1000	4/23/2019
Right Floor Sill	Y	AC-A280869	MSI 1201-1000	3/22/2019
Rear Floorpan	X	AC-A280897	MSI 1201-1000	3/11/2019
Rear Floorpan	Y	AC-A280953	MSI 1201-1000	3/11/2019

**Table 3 – Pole Instrumentation**

Pole Instrumentation	Serial Number	Manufacturer	Calibration Date
Load Cell 1	LC-46962	Interface 1220-FS	8/3/2018
Load Cell 2	LC-18852	Interface 1220-FS	8/3/2018
Load Cell 3	LC-46955	Interface 1220-FS	8/3/2018
Load Cell 4	LC-18882	Interface 1220-FS	8/3/2018
Load Cell 5	LC-18864	Interface 1220-FS	8/3/2018
Load Cell 6	LC-18847	Interface 1220-FS	8/3/2018
Load Cell 7	LC-62086	Interface 1220-FS	8/3/2018
Load Cell 8	LC-18879	Interface 1220-FS	8/3/2018