

REPORT NUMBER: NCAP-KAR-19-028

**NEW CAR ASSESSMENT PROGRAM (NCAP)
FRONTAL BARRIER IMPACT TEST**

**HONDA OF AMERICA MFG., INC.
2019 HONDA CR-V AWD LX 5-DOOR MPV**

NHTSA NUMBER: M20195300

**PREPARED BY:
APPLUS IDIADA KARCO ENGINEERING, LLC.
9270 HOLLY ROAD
ADELANTO, CA 92301**



JUNE 14, 2019

FINAL REPORT

**U.S. DEPARTMENT OF TRANSPORTATION
NATIONAL HIGHWAY TRAFFIC SAFETY ADMINISTRATION
OFFICE OF CRASHWORTHINESS STANDARDS
1200 NEW JERSEY AVE, SE
ROOM W43-410
WASHINGTON, DC 20590**

This publication is distributed by the U.S. Department of Transportation, National Highway Traffic Safety Administration, in the interest of information exchange. The opinions, findings and conclusions expressed in this publication are those of the author(s) and not necessarily those of the Department of Transportation or the National Highway Traffic Safety Administration. The United States Government assumes no liability for its contents or use thereof. If trade or manufacturers' names or products are mentioned, it is only because they are considered essential to the object of the publication and should not be construed as an endorsement. The United States Government does not endorse products or manufacturers.

Prepared By: Amjad A. Jadallah
Mr. Amjad A. Jadallah, Project Engineer
Applus IDIADA KARCO Engineering, LLC.

Reviewed By: WLP
Mr. Michael L. Dunlap, Director of Operations
Applus IDIADA KARCO Engineering, LLC.

Approved By: Steven D. Matsusaka
Mr. Steven D. Matsusaka, Engineering Manager
Applus IDIADA KARCO Engineering, LLC.

Approval Date: June 14, 2019

FINAL REPORT ACCEPTANCE BY OCWS:

Division Chief, New Car Assessment Program
NHTSA, Office of Crashworthiness Standards

Date: _____

COTR, New Car Assessment Program
NHTSA, Office of Crashworthiness Standards

Date: _____

TECHNICAL REPORT DOCUMENTATION PAGE

1. Report No. NCAP-KAR-19-028	2. Government Accession No.	3. Recipient's Catalog No.																																																					
4. Title and Subtitle Final Report of New Car Assessment Program Testing of a 2019 Honda CR-V AWD LX 5-Door MPV NHTSA No. M20195300		5. Report Date June 14, 2019																																																					
		6. Performing Organization Code KAR																																																					
7. Authors Mr. Amjad A. Jadallah, Project Engineer, Applus IDIADA KARCO Mr. Steven D. Matsusaka, Engineering Manager, Applus IDIADA KARCO		8. Performing Organization Report No. TR-P39177-01-NC																																																					
9. Performing Organization Name and Address Applus IDIADA KARCO Engineering, LLC. 9270 Holly Rd. Adelanto, CA 92301		10. Work Unit No.																																																					
		11. Contract or Grant No. DTNH22-12-D-00259																																																					
12. Sponsoring Agency Name and Address U. S. Department of Transportation National Highway Traffic Safety Administration Office of Crashworthiness Standards 1200 New Jersey Ave., SE, Room W43-410 Washington, D.C. 20590		13. Type of Report and Period Covered Final Test Report, May 30 - June 14, 2019																																																					
		14. Sponsoring Agency Code NRM-110																																																					
15. Supplementary Notes																																																							
16. Abstract A 56.3 km/h NCAP Frontal Impact Test was conducted on a 2019 Honda CR-V AWD LX 5-door MPV in accordance with the specifications of the Office of Crashworthiness Standards Frontal NCAP Laboratory Test Procedure. This test was conducted to obtain data indicant of FMVSS 208, 212, 219 (partial), 301, and footwell intrusion performance. The test was conducted at the Applus IDIADA KARCO Engineering, LLC. facility in Adelanto, California on May 30, 2019. The impact velocity of the vehicle was 56.02 km/h and the ambient temperature at the barrier face at the time of impact was 29.4°C. The target vehicle's post-test maximum crush was 350 mm at DPD 5 right of the vehicle's centerline. The test vehicle's performance is as follows:																																																							
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th rowspan="2">Measurement Description</th> <th rowspan="2">Units</th> <th colspan="2">Driver ATD</th> <th colspan="2">Passenger ATD</th> </tr> <tr> <th>Threshold</th> <th>Result</th> <th>Threshold</th> <th>Result</th> </tr> </thead> <tbody> <tr> <td>Head Injury Criteria (HIC₁₅)</td> <td>N/A</td> <td>700</td> <td>141.3</td> <td>700</td> <td>309.0</td> </tr> <tr> <td>Maximum Chest Compression</td> <td>mm</td> <td>63</td> <td>-22</td> <td>52</td> <td>-15</td> </tr> <tr> <td>Nij</td> <td>N/A</td> <td>1</td> <td>0.27</td> <td>1</td> <td>0.37</td> </tr> <tr> <td>Neck Tension</td> <td>N</td> <td>4170</td> <td>780.4</td> <td>2620</td> <td>711.7</td> </tr> <tr> <td>Neck Compression</td> <td>N</td> <td>4000</td> <td>-309.6</td> <td>2520</td> <td>-426.6</td> </tr> <tr> <td>Left Femur Force</td> <td>N</td> <td>10000</td> <td>-290.0</td> <td>6800</td> <td>-1229.4</td> </tr> <tr> <td>Right Femur Force</td> <td>N</td> <td>10000</td> <td>-85.5</td> <td>6800</td> <td>-1079.6</td> </tr> </tbody> </table>				Measurement Description	Units	Driver ATD		Passenger ATD		Threshold	Result	Threshold	Result	Head Injury Criteria (HIC ₁₅)	N/A	700	141.3	700	309.0	Maximum Chest Compression	mm	63	-22	52	-15	Nij	N/A	1	0.27	1	0.37	Neck Tension	N	4170	780.4	2620	711.7	Neck Compression	N	4000	-309.6	2520	-426.6	Left Femur Force	N	10000	-290.0	6800	-1229.4	Right Femur Force	N	10000	-85.5	6800	-1079.6
Measurement Description	Units	Driver ATD				Passenger ATD																																																	
		Threshold	Result	Threshold	Result																																																		
Head Injury Criteria (HIC ₁₅)	N/A	700	141.3	700	309.0																																																		
Maximum Chest Compression	mm	63	-22	52	-15																																																		
Nij	N/A	1	0.27	1	0.37																																																		
Neck Tension	N	4170	780.4	2620	711.7																																																		
Neck Compression	N	4000	-309.6	2520	-426.6																																																		
Left Femur Force	N	10000	-290.0	6800	-1229.4																																																		
Right Femur Force	N	10000	-85.5	6800	-1079.6																																																		
17. Key Words 35 mph Frontal Barrier Impact Test New Car Assessment Program (NCAP)		18. Distribution Statement Copies of this report are available from: National Highway Traffic Safety Administration Technical Information Services Division, NPO-411 1200 New Jersey Ave., SE Washington, DC 20590																																																					
19. Security Classification of this report UNCLASSIFIED	20. Security Classification of this page UNCLASSIFIED	21. No. of Pages 136	22. Price																																																				

TABLE OF CONTENTS

<u>Section</u>		<u>Page No.</u>
1	Purpose and Summary of Test	1
2	Occupant and Vehicle Information / Data Sheets	3
<u>Data Sheet No.</u>		<u>Page No.</u>
1	General Test and Vehicle Parameter Data	4
2	Seat Adjustment, Fuel System, and Steering Wheel Data	8
3	Dummy Longitudinal Clearance Dimensions	10
4	Dummy Lateral Clearance Dimensions	11
5	Seat Belt Positioning Data	12
6	High-Speed Camera Locations and Data	13
7	Vehicle Accelerometer Locations	15
8	Photographic Reference Target Locations	16
9	Load Cell Locations on Fixed Barrier	17
10	Test Vehicle Camera and Instrumentation Summary	18
11	Post-Test Observations	19
12	Vehicle Profile Measurements	20
13	Accident Investigation Division Data	22
14	Vehicle Intrusion Measurements	23
15	Summary of FMVSS 212, 219 (Partial), and 301 Data	25
16	FMVSS 301 Static Rollover Results	27
17	Dummy / Vehicle Temperature Stabilization Chart	28
<u>Appendix</u>		<u>Page No.</u>
A	Photographs	A
B	Dummy Response Data Traces	B
C	ATD Calibration and Performance Verification Data	C

SECTION 1

PURPOSE AND SUMMARY OF TEST

PURPOSE

This 56.3 km/h frontal barrier impact test is part of the Vehicle Barrier Impact Testing Program, sponsored by the National Highway Traffic Safety Administration (NHTSA) under contract number DTNH22-12-D-00259. The purpose of this test was to obtain vehicle crashworthiness and occupant restraint system performance data for consumer information purposes.

The 56.3 km/h frontal barrier impact test was conducted in accordance with the Office of Crashworthiness Standards Frontal NCAP Laboratory Test Procedure, dated October 2015.

SUMMARY

A load cell barrier consisting of 176 load cells was impacted by a 2019 Honda CR-V AWD LX 5-door MPV at a velocity of 56.02 km/h. The test was performed at Applus IDIADA KARCO Engineering, LLC. on May 30, 2019. Pre- and post-test photographs of the vehicle and dummies can be found in Appendix A of this report.

Three (3) real-time cameras and sixteen (16) high-speed cameras were used to document the frontal barrier impact event. Camera locations and other pertinent camera information can be found in Data Sheet 6 of this report.

One Part 572E 50th percentile male anthropomorphic test device (ATD) was placed in the driver seating position and one Part 572O 5th percentile female ATD was placed in the right-front passenger seating position according to dummy placement instructions specified in the Frontal NCAP Laboratory Test Procedure.

Both ATDs were fully instrumented with head, chest and pelvis tri-axial accelerometers, chest displacement potentiometers, upper neck force transducers, right / left femur load cells, and lower leg instrumentation. The driver (position 1) ATD (Serial No. 360) and the right-front passenger (position 2) ATD (Serial No. 630) were calibrated prior to this test. Certification details, along with instrumentation calibration data, are found in Appendix C of this report.

The 102 channels of dummy and vehicle response data were recorded on an on-board data acquisition system. Appendix B contains the dummy response data traces.

There was 100% windshield retention and no intrusion into the protected zone of the windshield during the event.

The maximum static crush was 350 mm at DPD 5 right of the vehicle's centerline. Both the driver and passenger side doors remained closed during the impact event and were operable after the impact.

The driver's visible contact points were as follows: The driver ATD's head contacted the frontal airbag and headrest. The upper torso contacted the frontal airbag. Both left and right knees contacted the knee bolster and steering column.

The passenger's visible contact points were as follows: The passenger ATD's head contacted the frontal airbag and headrest. The upper torso contacted the frontal airbag. Both left and right knees contacted the knee bolster.

The occupant data is summarized below:

ATD Position	HIC ₁₅	T ¹ (ms)	T ² (ms)	Chest Disp. (mm)	Nij	Neck Tension (N)	Neck Comp. (N)	Left Femur (N)	Right Femur (N)
Driver (50th)	141.3	64.7	79.7	-22	0.27	780.4	-309.6	-290.0	-85.5
Passenger (5th)	309.0	64.7	79.7	-15	0.37	711.7	-426.6	-1229.4	-1079.6

SECTION 2

OCCUPANT AND VEHICLE INFORMATION / DATA SHEETS

Test Vehicle: 2019 Honda CR-V AWD LX 5-Door MPV NHTSA No.: M20195300

Test Program: 56.3 km/h Frontal Impact NCAP Test Test Date: 05/30/19

CONVERSION FACTORS

Quantity	Typical Application	Std Units	Metric Unit	Multiply By
Mass	Vehicle Weight	lb	kg	0.4536
Linear Velocity	Impact Velocity	miles/hr	km/hr	1.609344
Length or Distance	Measurements	in	mm	25.4
Volume	Fuel Systems	gal	liter	3.785
Volume	Small Fluids	oz	mL	29.574
Pressure	Tire Pressures	lb/in ²	kPa	6.895
Temperature	General Use	°F	°C	$=(T_f - 32)/1.8$
Force	Dynamic Forces	lbf	N	4.448
Moment	Torque	lbf-ft	N•m	1.355

DATA SHEET NO. 1

GENERAL TEST AND VEHICLE PARAMETER DATA

Test Vehicle: 2019 Honda CR-V AWD LX 5-Door MPV NHTSA No.: M20195300
 Test Program: 56.3 km/h Frontal Impact NCAP Test Test Date: 05/30/19

TEST VEHICLE INFORMATION AND OPTIONS

NHTSA Number	M20195300
Model Year	2019
Make	Honda
Model	CR-V AWD LX
Body Style	5-Door MPV
VIN	5J6RW6H37KL002072
Body Color	Basque Red P.
Odometer Reading (km / mi)	11 / 7
Engine Displacement (L)	2.4
Type / No. of Cylinders	Inline 4
Engine Placement	Transverse
Transmission Type	Automatic
Transmission Speeds	CVT
Overdrive	No
Final Drive	AWD
Roof Rack	No
Sunroof / T-Top	No
Running Boards	No
Tilt Steering Wheel	Yes
Power Seats	No
Anti-Lock Brakes (ABS)	Yes
Automatic Door Locks (ADLs)	Yes

Traction Control System	Yes
Power Steering	Yes
Power Window Auto-Reverse	Yes
Driver Frontal Airbag	Yes
Driver Curtain Airbag	Yes
Driver Head/Torso Airbag	No
Driver Torso Airbag	No
Driver Torso/Pelvis Airbag	Yes
Driver Pelvis Airbag	No
Driver Knee Airbag	No
Front Pass. Frontal Airbag	Yes
Front Pass. Curtain Airbag	Yes
Front Pass. Head/Torso Airbag	No
Front Pass. Torso Airbag	No
Front Pass. Torso/Pelvis Airbag	Yes
Front Pass. Pelvis Airbag	No
Front Pass. Knee Airbag	No
Driver Seat Belt Pretensioner	Yes
Driver Load Limiter	Yes
Front Pass. Seat Belt Pretensioner	Yes
Front Pass. Load Limiter	Yes
Other Safety Restraint	No

Does Owner's Manual provide instructions to turn off automatic door locks? Yes

DATA FROM CERTIFICATION LABEL

Manufactured By	Honda of America MFG., INC.
Date of Manufacture	Mar-19

GVWR (kg)	2130
GAWR Front (kg)	1100
GAWR Rear (kg)	1075

VEHICLE SEATING AND CAPACITY WEIGHT INFORMATION


Measured Parameter	Front	Rear	Third	Total
Type of Seats	Bucket	Split Bench		
Designated Seating Capacity	2	3		5
Capacity Weight (VCW) (kg)				385.0
DSC x 68.04 (kg)				340.2
Cargo Weight (RCLW) (kg)				44.8

A
B
A-B

DATA SHEET NO. 1 ... (CONTINUED)

GENERAL TEST AND VEHICLE PARAMETER DATA

Test Vehicle: 2019 Honda CR-V AWD LX 5-Door MPV NHTSA No.: M20195300
 Test Program: 56.3 km/h Frontal Impact NCAP Test Test Date: 05/30/19

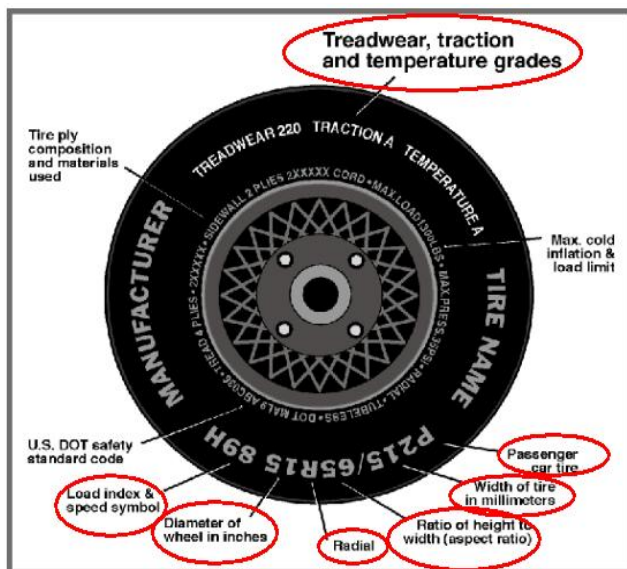

VEHICLE TIRE INFORMATION

Measured Parameter	Front	Rear
Max. Tire Pressure (kPa)	300	300
Cold Pressure (kPa)	220	210
Recommended Tire Size	P235/65R17	P235/65R17
Tire Size on Vehicle	P235/65R17	P235/65R17
Tire Manufacturer	Bridgestone	Bridgestone
Tire Model	Ecopia H/L 422	Ecopia H/L 422
Treadwear	700	700
Traction	A	A
Temperature Grades	A	A
Tire Plies Sidewall	2 Polyester	2 Polyester
Tire Plies Body	2 Polyester, 2 Steel, 1 Nylon	2 Polyester, 2 Steel, 1 Nylon
Load Index / Speed Symbol	104H	104H
Tire Material	Nylon, Steel, Polyester	Nylon, Steel, Polyester
DOT Safety Code Left	7X81 EC2 0319	7X81 EC2 0319
DOT Safety Code Right	7X81 EC2 0319	7X81 EC2 0319

DATA SHEET NO. 1 ... (CONTINUED)

GENERAL TEST AND VEHICLE PARAMETER DATA

Test Vehicle: 2019 Honda CR-V AWD LX 5-Door MPV NHTSA No.: M20195300
 Test Program: 56.3 km/h Frontal Impact NCAP Test Test Date: 05/30/19

TEST VEHICLE WEIGHTS

	Units	As Delivered Weights (UWW)			As Tested Weights (ATW)		
		Front Axle	Rear Axle	Total	Front Axle	Rear Axle	Total
Left	kg	461.5	326.5		494.0	399.0	
Right	kg	450.5	312.0		465.0	371.5	
Ratio	%	58.8%	41.2%	100.0%	55.4%	44.6%	100.0%
Total	kg	912.0	638.5	1550.5	959.0	770.5	1729.5

TARGET TEST WEIGHT CALCULATION

Measured Parameter	Units	Value	
Total Delivered Weight (UWW)	kg	1550.5	A
Weight of 1 P572E ATD & 1 P572O ATD	kg	141.0	B
Rated Cargo/Luggage Weight (RCLW)	kg	44.8	C
Calculated Vehicle Target Weight (TVTW)	kg	1736.3	A+B+C

TEST VEHICLE ATTITUDES

Condition	Units	LF	RF	LR	RR	CG Aft of Front Axle
As Delivered	mm	871	872	882	886	1097
As Tested	mm	859	864	850	860	1187
Post-Test	mm	973	952	864	851	

GENERAL TEST VEHICLE DATA

Measurement Description	Units	Value
Total Vehicle Wheelbase	mm	2665
Total Vehicle Length at Left Side	mm	3995
Total Vehicle Length at Centerline	mm	4580
Total Vehicle Length at Right Side	mm	3995
Weight of Ballast in Cargo Area	kg	50.0
Weight of Vehicle Components Removed	kg	12.0
Amount of Stoddard Solvent in Fuel Tank	L	49.28

VEHICLE COMPONENTS REMOVED TO MEET TEST WEIGHT:

Trunk trim and spare tire (12.0 kg)

DATA SHEET NO. 1 ... (CONTINUED)**GENERAL TEST AND VEHICLE PARAMETER DATA**

Test Vehicle: 2019 Honda CR-V AWD LX 5-Door MPV NHTSA No.: M20195300
Test Program: 56.3 km/h Frontal Impact NCAP Test Test Date: 05/30/19

TARGET VEHICLE STRUCTURAL MEASUREMENTS

No.	Description	Pre-Test
1	Total Length	4580
2	Total Width	1845
3	Bumper Top Height	625
4	Bumper Bottom Height	465
5	Longitudinal Member Top Height	590
6	Distance Between Longitudinal Members	920
7	Longitudinal Member Width	80
8	Engine Top Height	925
9	Engine Bottom Height	246
10	Engine and Gearbox Width	450
11	Front Bumper to Engine Distance	615
12	Front Shock Absorber Fixing Height	1010
13	Bonnet Leading Edge Height	910
14	Front Shock Absorber Fixing Width	1195
15	Front Bumper to Front Axle Distance	910
16	Front Axle to A-Pillar Distance	505
17	A-Pillar to B-Pillar Distance	1016
18	B-Pillar to Rear Axle Distance	1080
19	B-Pillar to C-Pillar Distance	869
20	Roof Sill Bottom Height	1510
21	Roof Sill Top Height	1645
22	Floor Sill Bottom Height	310
23	Floor Sill Top Height	420

All measurements in millimeters.


DATA SHEET NO. 2

SEAT ADJUSTMENT, FUEL SYSTEM, AND STEERING WHEEL DATA

Test Vehicle: 2019 Honda CR-V AWD LX 5-Door MPV NHTSA No.: M20195300
 Test Program: 56.3 km/h Frontal Impact NCAP Test Test Date: 05/30/19

NOMINAL DESIGN RIDING POSITION

The procedure for the driver is as follows: the seat back is set to the manufacturer’s designated angle. The procedure for the passenger is as follows: the seat back is set to position the transverse instrumentation platform of the dummy’s head at $0^\circ \pm 0.5^\circ$. Seat back angle is measured at the headrest post.

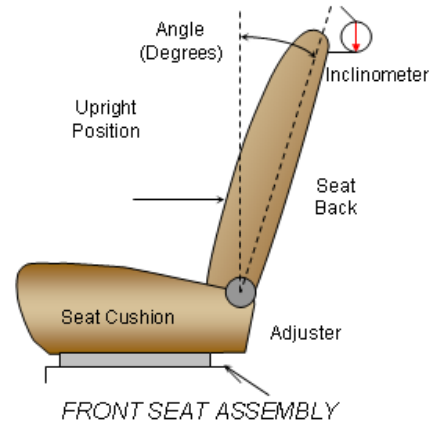


SEAT BACK ANGLE

Seating Position	Degrees
Driver Seat Back Angle	5.1
Passenger Seat Back Angle	0.0

SEAT FORE / AFT POSITIONING

The total seat travel is measured from the forward most possible position to the rear most possible position. The driver’s seat is set to the middle of the fore-aft travel. The passenger’s seat is set to the forward most position where the ATD will not contact any interior panels.

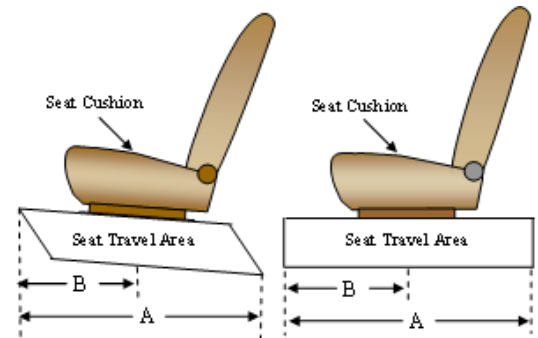

SEAT FORE/AFT POSITIONS

Seating Position	Total Fore-Aft Travel	Placed in Position
Driver Seat	240 mm	102 mm
Passenger Seat	240 mm	0 mm

SEAT BELT UPPER ANCHORAGE

The seat belt upper anchorage is positioned to the manufacturer’s design position for a 50th percentile adult male ATD for the driver, and a 5th percentile adult female ATD for the passenger. Position “H” is the uppermost position, followed by position “M”, and Position “L” is the lowermost position.

SEAT BELT UPPER ANCHORAGES

Seating Position	Total No. of Positions	Placed in Position
Driver Seat	4	H
Passenger Seat	4	H

DATA SHEET NO. 2 ... (CONTINUED)

SEAT ADJUSTMENT, FUEL SYSTEM, AND STEERING WHEEL DATA


Test Vehicle: 2019 Honda CR-V AWD LX 5-Door MPV NHTSA No.: M20195300
 Test Program: 56.3 km/h Frontal Impact NCAP Test Test Date: 05/30/19

FUEL TANK CAPACITY

Description	Liters
Usable Capacity of "Standard Tank"	52.99
Usable Capacity of "Optional Tank"	
92 - 94% of Usable Capacity	48.75 to 49.81
Actual Amount of Stoddard Solvent Used	49.29
1/3 of Usable Capacity	17.66

FUEL PUMP


The vehicle is equipped with an electric fuel pump. After the ignition key is turned from LOCK (O) to ON (II) position. The pump is filled up for two seconds and then the pressure is maintained.

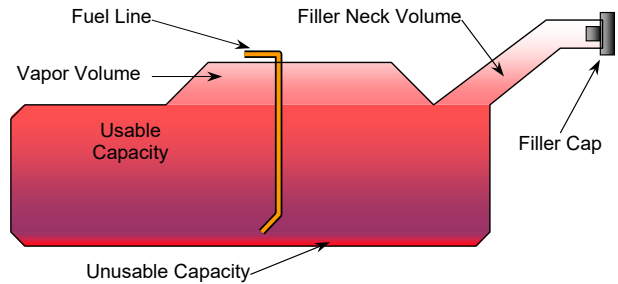

VEHICLE FUEL TANK ASSEMBLY

STEERING COLUMN ADJUSTMENT

Steering wheel and column adjustments are made so that the steering wheel hub is at the geometric center of the locus it describes when moved through its full range of motion. A digital inclinometer is used to measure a plate which is placed across the rim of the steering wheel for angular measurements.

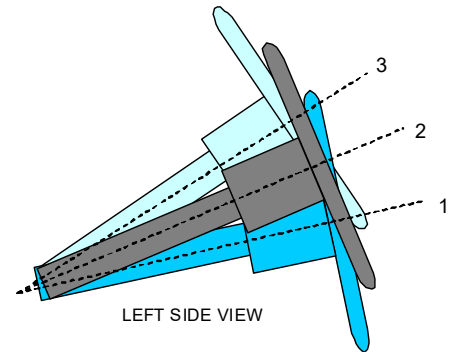

STEERING COLUMN ASSEMBLY

STEERING COLUMN POSITIONING


	Degrees	Fore-Aft Position (mm)
Lowermost Position, No. 1	25.3	93
Geometric Center Position, No. 2	27.8	112
Uppermost Position, No. 3	30.3	130
Telescoping Steering Wheel Travel		37
Test Position	27.8	112

DATA SHEET NO. 3

DUMMY LONGITUDINAL CLEARANCE DIMENSIONS

Test Vehicle: 2019 Honda CR-V AWD LX 5-Door MPV NHTSA No.: M20195300

Test Program: 56.3 km/h Frontal Impact NCAP Test Test Date: 05/30/19

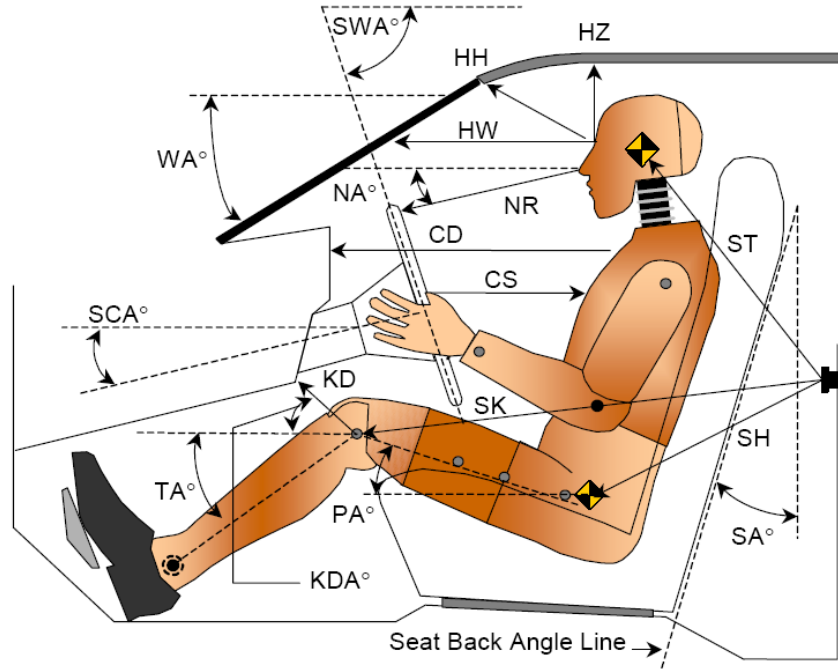

LEFT SIDE VIEW


Code	Measurement Description	Driver		Passenger	
		Length (mm)	Angle (°)	Length (mm)	Angle (°)
WA°	Windshield Angle		25.8		
SWA°	Steering Wheel Angle		62.2		
SCA°	Steering Column Angle		27.8		
SA°	Seat Back Angle (On Headrest Post)		5.1		0.0
HZ	Head to Roof	232	90.0	216	90.0
HH	Head to Header	370	24.1	302	47.2
HW	Head to Windshield	715	0.0	615	0.0
NR	Nose to Rim	454	15.4	498	28.4
CD	Chest to Dash	548	12.1	406	13.0
CS	Chest to Steering Hub	335	0.0		
RA	Rim to Abdomen	196	0.0		
KDL	Left Knee to Dash	166	32.7	120	44.5
KDR	Right Knee to Dash	153	28.1	125	42.7
PA°	Pelvic Angle		23.7		19.0
TA°	Tibia Angle		45.3		53.1
SK	Striker to Knee	646	13.1	743	14.9
ST	Striker to Head	392	72.2	408	50.5
SH	Striker to H-Point	376	48.8	464	32.5

DATA SHEET NO. 4

DUMMY LATERAL CLEARANCE DIMENSIONS

Test Vehicle: 2019 Honda CR-V AWD LX 5-Door MPV NHTSA No.: M20195300


Test Program: 56.3 km/h Frontal Impact NCAP Test Test Date: 05/30/19

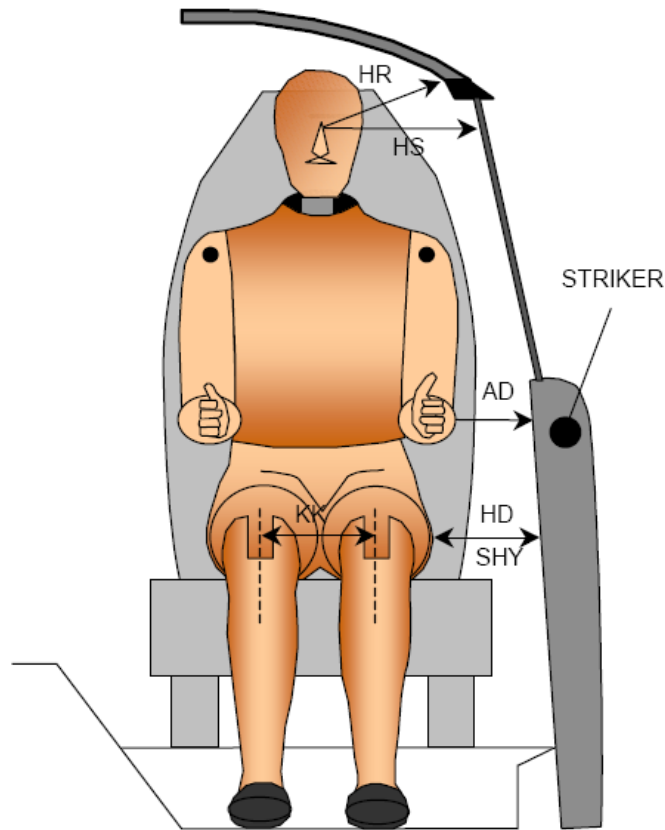

Code	Description	Driver (mm)	Passenger (mm)
AD	Arm to Door	122	84
HD	H-Point to Door	159	183
HR	Head to Side Header	250	254
HS	Head to Side Window	347	339
KK	Knee to Knee	355	163
SHY	Striker to H-Point (Y-Direction)	237	271
AA	Ankle to Ankle	345	172

DATA SHEET NO. 5
SEAT BELT POSITIONING DATA

Test Vehicle: 2019 Honda CR-V AWD LX 5-Door MPV NHTSA No.: M20195300
 Test Program: 56.3 km/h Frontal Impact NCAP Test Test Date: 05/30/19

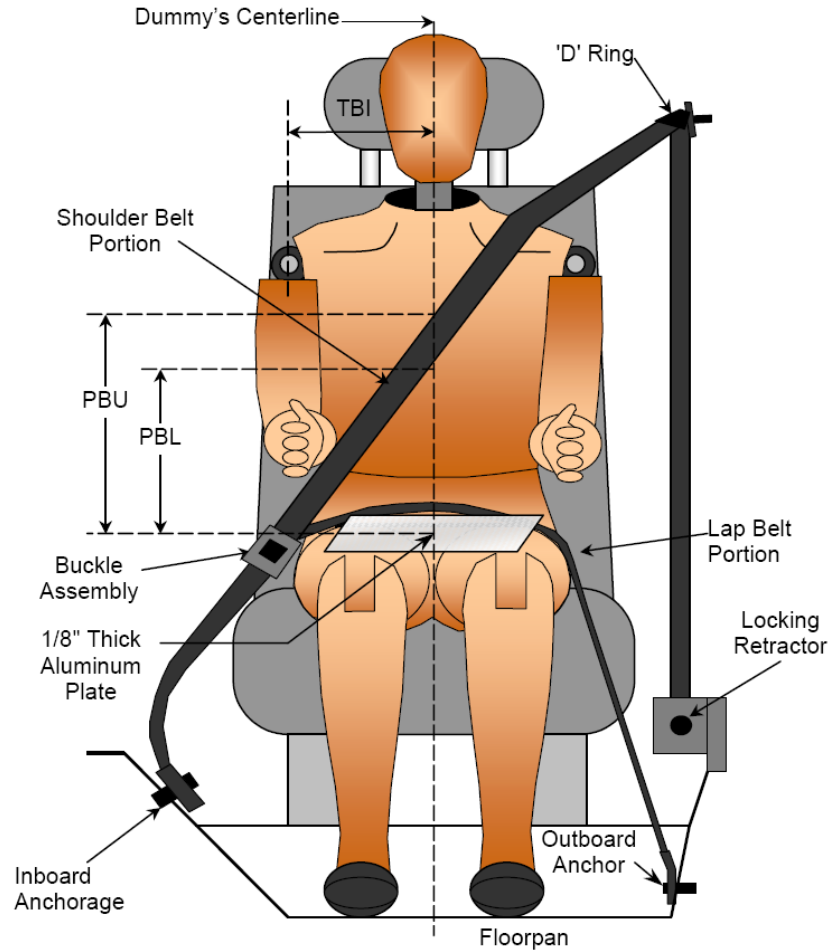

FRONT VIEW OF DUMMY

SEAT BELT POSITIONING MEASUREMENTS

Code	Measurement Description	Units	Driver	Passenger
PBU	Top Surface of Aluminum Plate to Belt Upper Edge	mm	345	319
PBL	Top Surface of Aluminum Plate to Belt Lower Edge	mm	265	239

BELT LENGTH DATA

Measurement Description	Units	Driver	Passenger
Shoulder Belt Length as Measured on ATD	mm	835	959
Lap Belt Length as Measured on ATD	mm	746	814
Remainder of Belt on Reel	mm	1009	835
Total Belt Length for Continuous Webbing Systems	mm	2590	2608


DATA SHEET NO. 6

HIGH-SPEED CAMERA LOCATIONS AND DATA

Test Vehicle: 2019 Honda CR-V AWD LX 5-Door MPV NHTSA No.: M20195300

Test Program: 56.3 km/h Frontal Impact NCAP Test Test Date: 05/30/19

CAMERA POSITIONS FOR FRONTAL IMPACTS

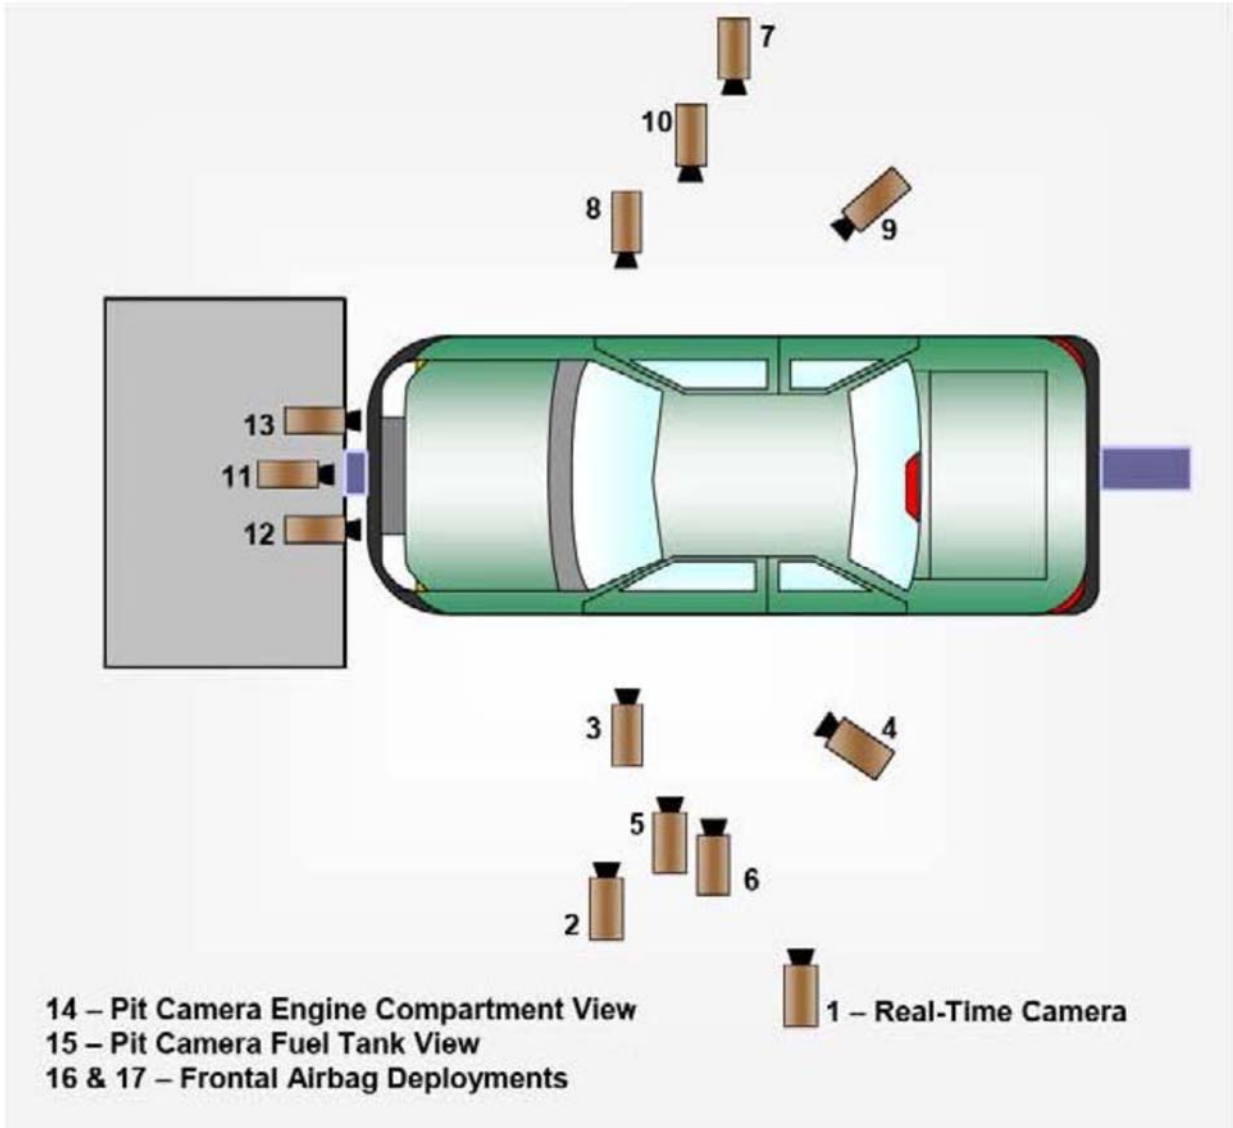

DATA SHEET NO. 6 ... (CONTINUED)

HIGH-SPEED CAMERA LOCATIONS AND DATA

Test Vehicle: 2019 Honda CR-V AWD LX 5-Door MPV NHTSA No.: M20195300

Test Program: 56.3 km/h Frontal Impact NCAP Test Test Date: 05/30/19

CAMERA LOCATIONS

No.	Description	Location (mm)			Lens (mm)	Speed (fps)
		X	Y	Z		
1	Real-Time Left Overall	-11412	-8150	-1484		30
2	Driver Close-Up	-2590	-7950	-1371	50	1000
3	Left Front Half	-1701	-6197	-1701	35	1000
4	Left Angle	-6696	-10308	-3211	105	1000
5	Steering Column - Top	-1966	-10412	-3688	35	1000
6	Steering Column - Bottom	-1972	-10412	-3379	35	1000
7	Right Overall	-2336	7569	-1012	20	1000
8	Passenger Close-Up	-1733	7581	-1408	50	1000
9	Right Front Half	-1600	8214	-1811	35	1000
10	Right Angle	-6217	9516	-4830	85	1000
11	Windshield	-354	0	-5749	28	1000
12	Driver Windshield	297	-366	-2460	24	1000
13	Passenger Windshield	297	366	-2460	24	1000
14	Pit Front	-756	0	1495	20	1000
15	Pit Rear	-3398	0	1495	20	1000
16	Onboard Driver Airbag (Optional)	1250	-250	-1560	8	1000
17	Onboard Passenger Airbag (Optional)	1250	250	-1560	8	1000
18	Real-Time Left View of Impact					
19	Real-Time Right View of Impact					



Coordinates: +X = forward impact plane
 +Y = right of monorail center
 +Z = into ground

DATA SHEET NO. 7

VEHICLE ACCELEROMETER LOCATIONS

Test Vehicle: 2019 Honda CR-V AWD LX 5-Door MPV NHTSA No.: M20195300

Test Program: 56.3 km/h Frontal Impact NCAP Test Test Date: 05/30/19

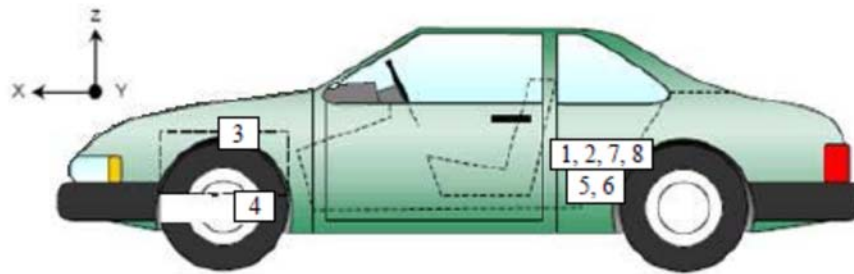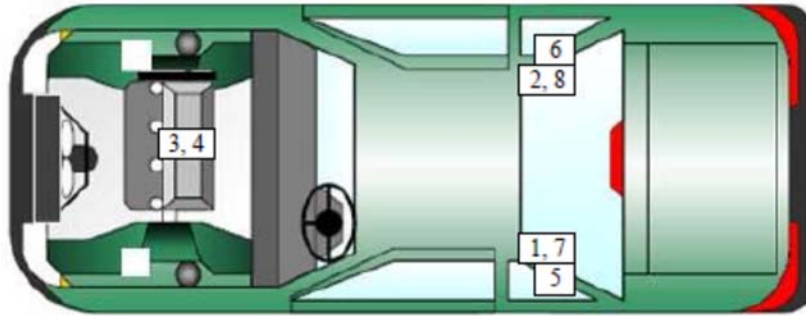

VEHICLE ACCELEROMETER PRE-TEST LOCATIONS

No.	Description	Location		
		X	Y	Z
1	Left Rear Accelerometer X-Direction	1760	710	-440
2	Right Rear Accelerometer X-Direction	1760	-710	-440
3	Engine Top X	4030	325	-820
4	Engine Bottom X	3720	220	-430
5	Left Rear Accelerometer Z-Direction	1760	710	-440
6	Right Rear Accelerometer Z-Direction	1760	-710	-440
7	Left Rear Accelerometer X-Direction Redundant	1760	710	-440
8	Right Rear Accelerometer X-Direction Redundant	1760	-710	-440

Reference Points:
 X – Rear Surface of Vehicle (+ forward)
 Y – Vehicle Centerline (+ to right)
 Z – Ground Plane (+ down)




DATA SHEET NO. 8

PHOTOGRAPHIC REFERENCE TARGET LOCATIONS

Test Vehicle: 2019 Honda CR-V AWD LX 5-Door MPV NHTSA No.: M20195300

Test Program: 56.3 km/h Frontal Impact NCAP Test Test Date: 05/30/19

Item	Value
A	400
B	923
C	2240
D	610
E	1760
F	305
G	1660
H	480
I	1405
J	839
K	839
L	1495
M	480
N	1495
O	839
P	839
Q	1405

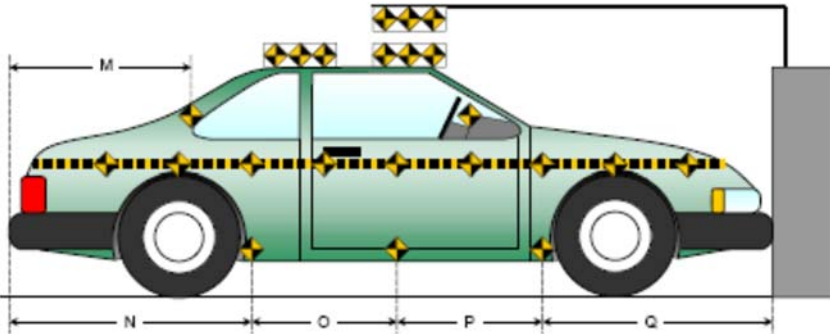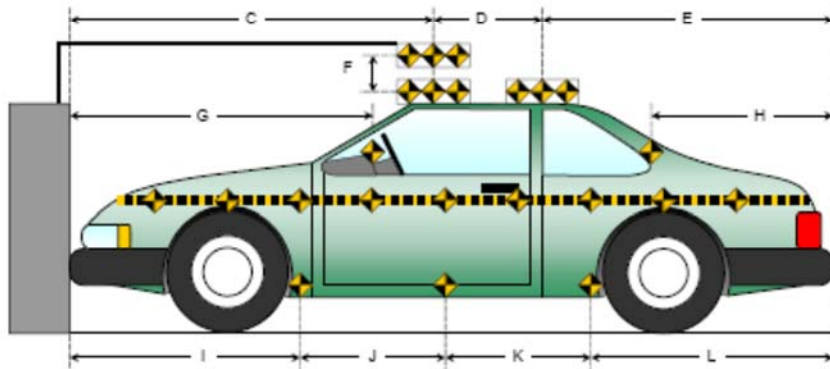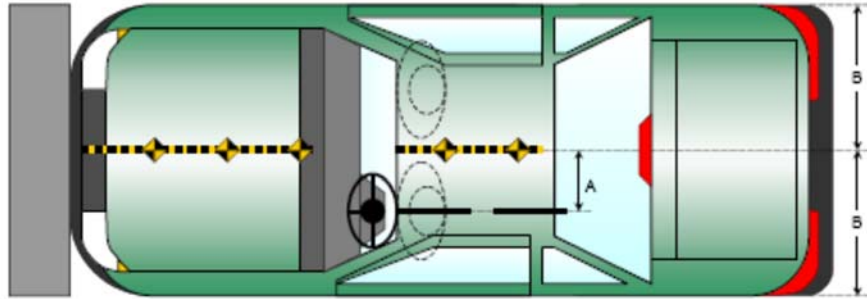


All measurements in millimeters.

DATA SHEET NO. 9

LOAD CELL LOCATIONS ON FIXED BARRIER

Test Vehicle: 2019 Honda CR-V AWD LX 5-Door MPV NHTSA No.: M20195300

Test Program: 56.3 km/h Frontal Impact NCAP Test Test Date: 05/30/19

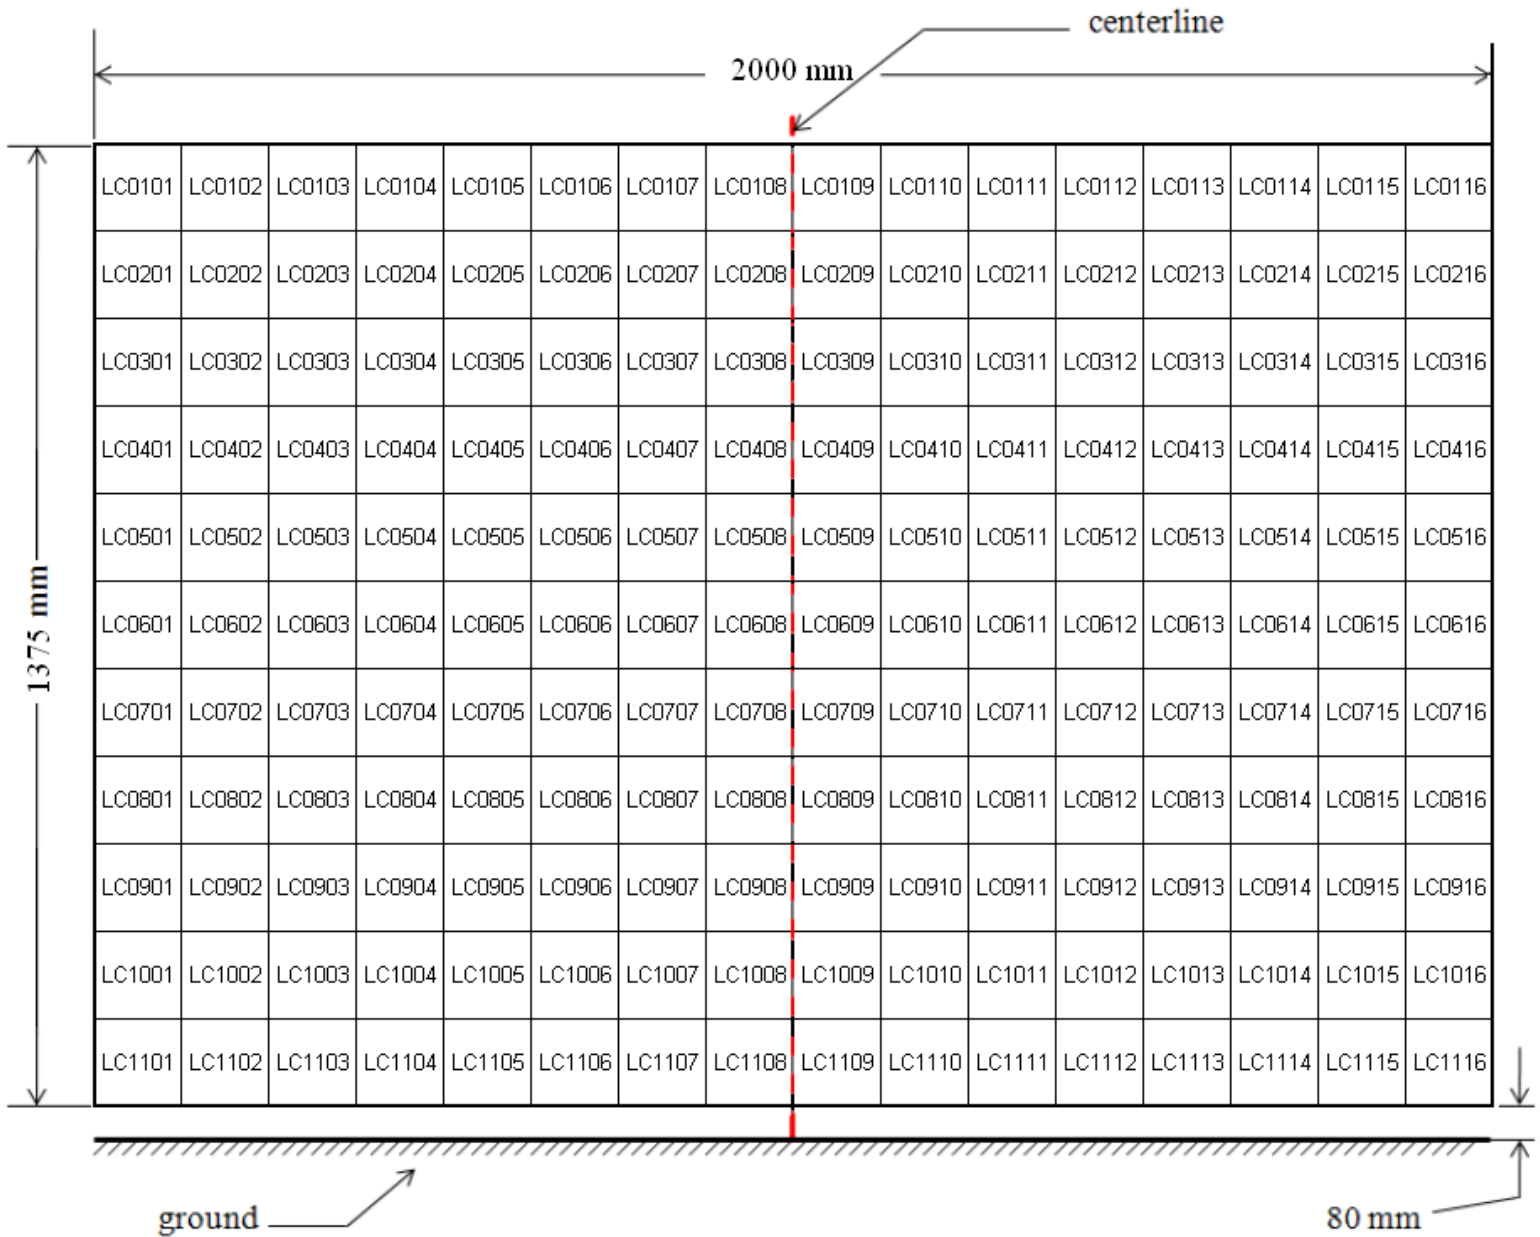

DATA SHEET NO. 10

TEST VEHICLE CAMERA AND INSTRUMENTATION SUMMARY

Test Vehicle: 2019 Honda CR-V AWD LX 5-Door MPV NHTSA No.: M20195300

Test Program: 56.3 km/h Frontal Impact NCAP Test Test Date: 05/30/19

INSTRUMENTATION

Driver Dummy Accelerometers	47
Passenger Dummy Accelerometers	47
Vehicle Structure Accelerometers	8
Load Cell Barrier	528
Total	630

CAMERA COVERAGE

High-Speed Vehicle On Board	2
High-Speed Off Board	14
Real Time	3
Total	19

DATA SHEET NO. 11
POST-TEST OBSERVATIONS

Test Vehicle: 2019 Honda CR-V AWD LX 5-Door MPV NHTSA No.: M20195300
 Test Program: 56.3 km/h Frontal Impact NCAP Test Test Date: 05/30/19

TEST DUMMY INFORMATION AND CONTACT

Description	Driver	Passenger
Dummy Type/Serial No.	P572E 50th Percentile Male ATD / 360	P572O 5th Percentile Female ATD / 630
Head Contact	Frontal Airbag, Headrest	Frontal Airbag, Headrest
Upper Torso Contact	Frontal Airbag	Frontal Airbag
Lower Torso Contact	None	None
Left Knee Contact	Knee Bolster, Steering Column	Knee Bolster
Right Knee Contact	Knee Bolster, Steering Column	Knee Bolster

DOOR OPENING AND SEAT TRACK INFORMATION

Description	Driver	Passenger
Locked / Unlocked Doors	Unlocked	Unlocked
Front Door Opening	Remained closed and latched, operational	Remained closed and latched, operational
Rear Door Opening	Remained closed and latched, operational	Remained closed and latched, operational
Seat Track Shift (mm)	1	0
Seat Back Failure	None	None
Glazing Damage	None	None

POST-TEST STRUCTURAL OBSERVATIONS

Critical Areas of Performance	Observations and Conclusions
Windshield Damage	None
Window Damage	None
Other Notable Effects	None

VEHICLE REBOUND FROM BARRIER

Measured Parameter	Units	Value
Left Side	mm	1052
Center	mm	841
Right Side	mm	923
Average	mm	939

SUPPLEMENTAL RESTRAINT SYSTEM INFORMATION


Restraint Type	Driver		Passenger	
	Installed	Operated	Installed	Operated
Front Airbag	Yes	Yes	Yes	Yes
Side Airbag 1 (Curtain)	Yes	No	Yes	No
Side Airbag 2 (Torso/Pelvis)	Yes	No	Yes	No
Knee Airbag	No		No	
Seat Belt Pretensioner	Yes	Yes	Yes	Yes
Seat Belt Load Limiter	Yes	Yes	Yes	Yes

DATA SHEET NO. 12

VEHICLE PROFILE MEASUREMENTS

Test Vehicle: 2019 Honda CR-V AWD LX 5-Door MPV NHTSA No.: M20195300

Test Program: 56.3 km/h Frontal Impact NCAP Test Test Date: 05/30/19

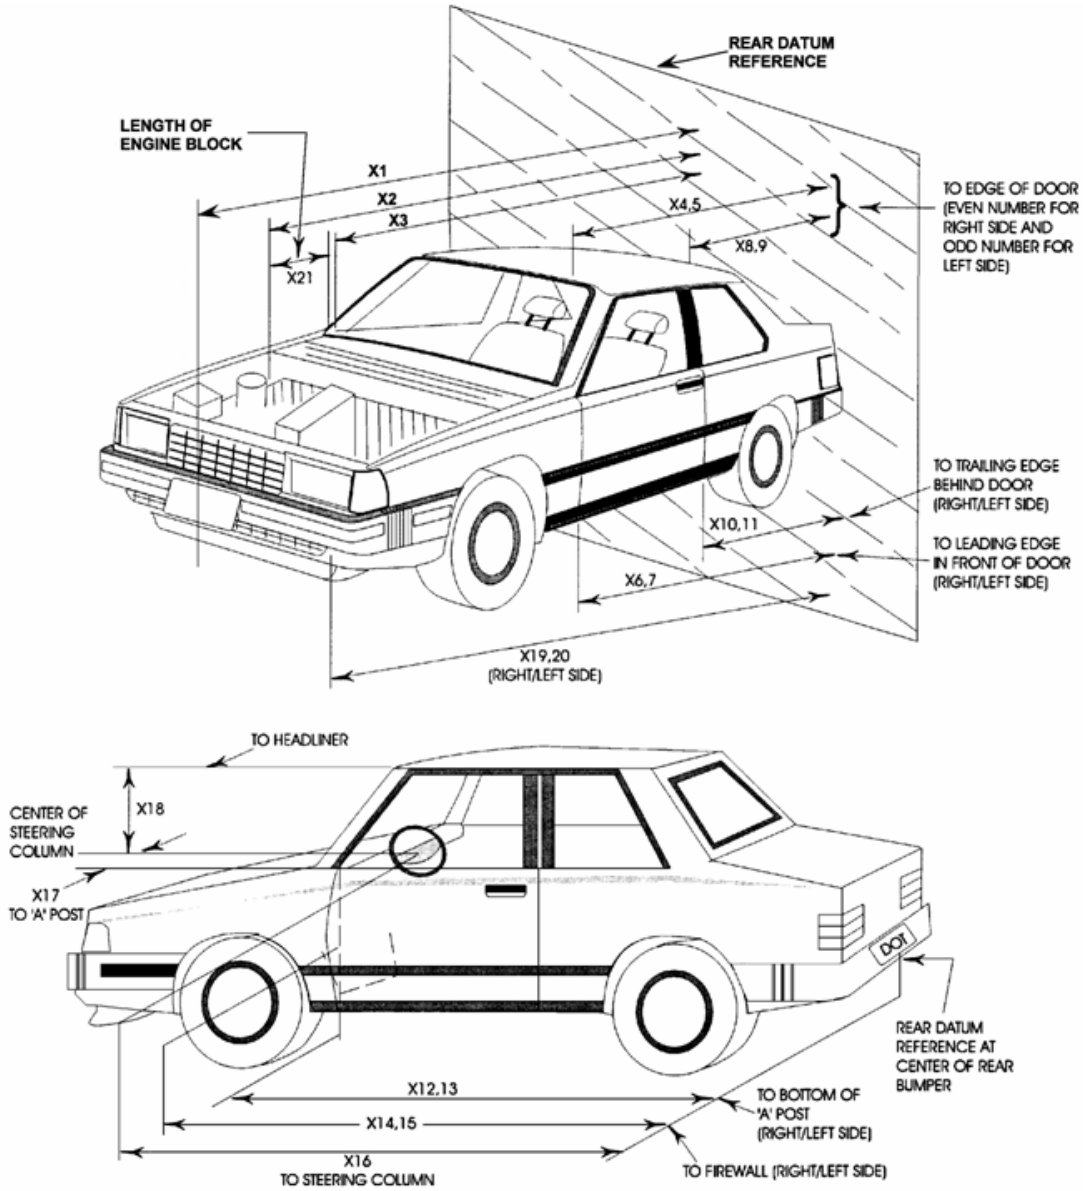

DATA SHEET NO. 12 ... (CONTINUED)

VEHICLE PROFILE MEASUREMENTS

Test Vehicle: 2019 Honda CR-V AWD LX 5-Door MPV NHTSA No.: M20195300
 Test Program: 56.3 km/h Frontal Impact NCAP Test Test Date: 05/30/19

No.	Description	Pre-Test	Post-Test	Difference
1	Total Length of Vehicle at Centerline	4580	4252	-328
2	Rear Surface of Vehicle to Front of Engine	3965	3795	-170
3	RSOV to Firewall	3490	3478	-12
4	RSOV to Upper Leading Edge of Right Door	3190	3161	-29
5	RSOV to Upper Leading Edge of Left Door	3192	3171	-21
6	RSOV to Lower Leading Edge of Right Door	3163	3170	7
7	RSOV to Lower Leading Edge of Left Door	3165	3168	3
8	RSOV to Upper Trailing Edge of Right Door	2071	2046	-25
9	RSOV to Upper Trailing Edge of Left Door	2070	2048	-22
10	RSOV to Lower Trailing Edge of Right Door	2088	2090	2
11	RSOV to Lower Trailing Edge of Left Door	2087	2085	-2
12	RSOV to Bottom of A-Pillar, Right Side	3151	2964	-187
13	RSOV to Bottom of A-Pillar, Left Side	3136	2984	-152
14	RSOV to Firewall, Right Side	3490	3480	-10
15	RSOV to Firewall, Left Side	3490	3480	-10
16	RSOV to Steering Column	2690	2763	73
17	Center of Steering Column to A-Pillar	410	410	0
18	Center of Steering Column to Headliner	430	440	10
19	RSOV to Right Side of Front Bumper	3995	4110	115
20	RSOV to Left Side of Front Bumper	3995	3880	-115
21	Length of Engine Block	610	610	0
RD	RSOV to Right Side of Dash Panel	2930	2878	-52
CD	RSOV to Center of Dash Panel	2895	2858	-37
LD	RSOV to Left Side of Dash Panel	2905	2938	33

All measurements in millimeters.

DATA SHEET NO. 13

ACCIDENT INVESTIGATION DIVISION DATA

Test Vehicle: 2019 Honda CR-V AWD LX 5-Door MPV NHTSA No.: M20195300

Test Program: 56.3 km/h Frontal Impact NCAP Test Test Date: 05/30/19

VEHICLE INFORMATION

VIN: 5J6RW6H37KL002072
 Vehicle Size Category: MPV

Wheelbase (mm): 2665
 Test Weight (kg): 1729.5


ACCELEROMETER DATA

Accelerometer Locations: Left Rear Crossmember
 Cal. Procedure/Interval: Vibration Test / 6 months
 Integration Algorithm: NHTSA Standard
 Impact Velocity (km/h): 56.02
 Velocity Change (km/h): 65.0
 Time of Separation (msec): 77.0

Linearity: Good

CRUSH PROFILE

Collision Deformation Classification: 12FDEW2
 Midpoint of Damage: Vehicle Centerline
 Damage Region Length (mm): 1318
 Impact Mode: Full Frontal

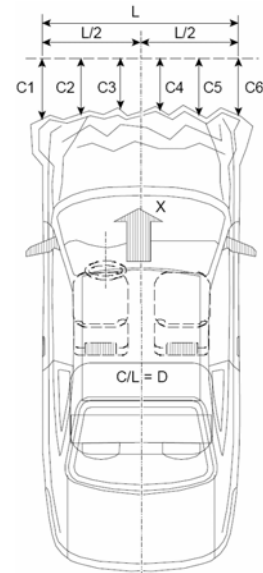

No.	Measurement Description	Units	Pre-Test	Post-Test	Difference
C1	Crush Zone 1 at Left Side	mm	150	380	230
C2	Crush Zone 2 at Left Side	mm	40	360	320
C3	Crush Zone 3 at Left Side	mm	0	330	330
C4	Crush Zone 4 at Right Side	mm	0	330	330
C5	Crush Zone 5 at Right Side	mm	40	390	350
C6	Crush Zone 6 at Right Side	mm	150	400	250
L	C1 to C6	mm	1318		

DATA SHEET NO. 14

VEHICLE INTRUSION MEASUREMENTS

Test Vehicle: 2019 Honda CR-V AWD LX 5-Door MPV NHTSA No.: M20195300


Test Program: 56.3 km/h Frontal Impact NCAP Test Test Date: 05/30/19

DOOR OPENING WIDTH

Item	Description	Units	Pre-Test	Post-Test	Difference
A	Left Side Upper	mm	1016	1043	-27
B	Left Side Lower	mm	883	876	7
D	Right Side Upper	mm	1022	1018	4
E	Right Side Lower	mm	876	872	4

WHEELBASE MEASUREMENTS

Item	Description	Units	Pre-Test	Post-Test	Difference
C	Left Side Wheelbase	mm	2665	2575	90
F	Right Side Wheelbase	mm	2665	2520	145

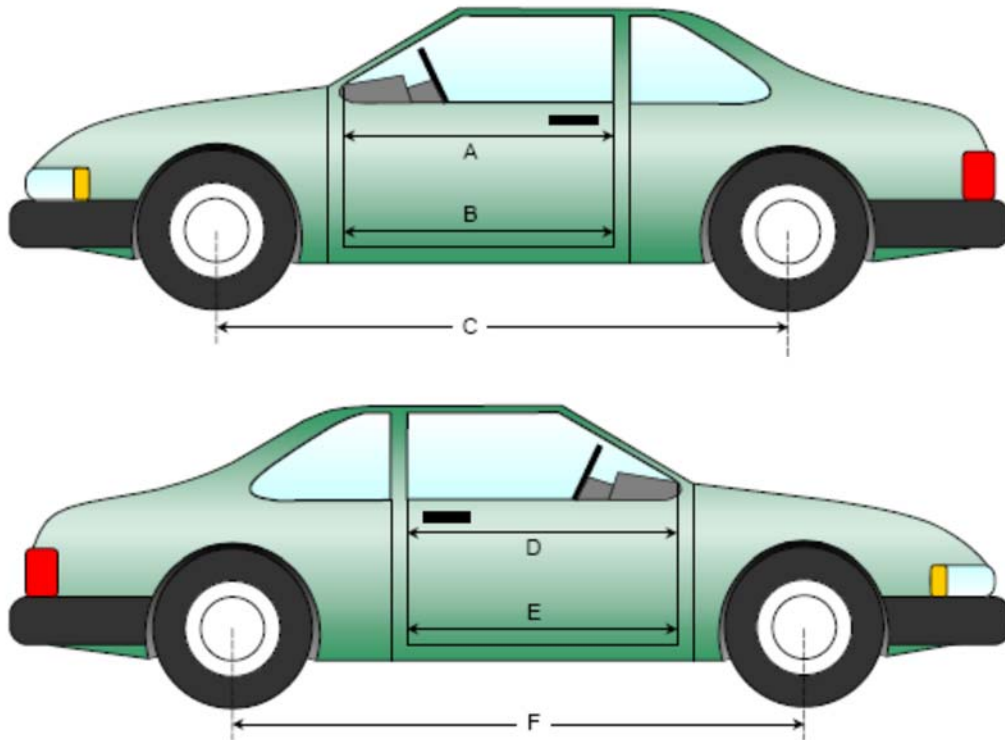


DATA SHEET NO. 14 ... (CONTINUED)
VEHICLE INTRUSION MEASUREMENTS

Test Vehicle: 2019 Honda CR-V AWD LX 5-Door MPV NHTSA No.: M20195300
 Test Program: 56.3 km/h Frontal Impact NCAP Test Test Date: 05/30/19

DRIVER COMPARTMENT INTRUSION

Item	Description	Units	Pre-Test	Post-Test	Difference
AB	Door Opening (Inside Window Jam)	mm	963	964	-1
CX	Left Knee Bolster to X	mm	305	299	6
DX	Right Knee Bolster to X	mm	305	298	7
EX	Brake Pedal to X	mm	535	535	0
FX	Foot Rest to X	mm	540	535	5
GX	Center of Steering Wheel Hub to X	mm	85	30	55

X = Front of Seat Track (Stationary)

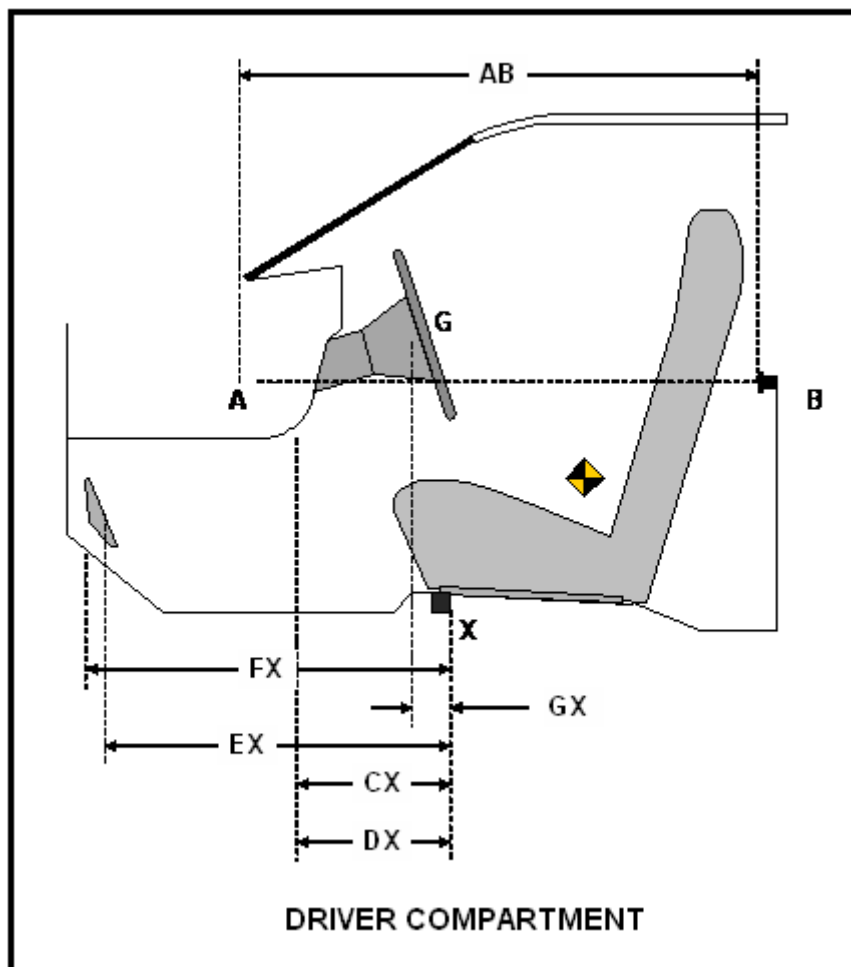

DATA SHEET NO. 15

SUMMARY OF FMVSS 212, 219 (PARTIAL), AND 301 DATA

Test Vehicle: 2019 Honda CR-V AWD LX 5-Door MPV NHTSA No.: M20195300

Test Program: 56.3 km/h Frontal Impact NCAP Test Test Date: 05/30/19


Windshield Mounting Details: Windshield glass is secured to the vehicle frame with rubber molding and rubber cement.

The standard requires that the post-test retention measurement be a minimum of 75% of the pre-test total periphery measurement for vehicles not equipped with occupant passive restraints and 50% for each side of the windshield for vehicles which are equipped with occupant passive restraints.

Temperature of windshield molding during test: 21.3° C

WINDSHIELD PERIPHERY MEASUREMENTS

Measurement	Pre-Test (mm)	Post-Test (mm)	% Retention
Left Side	2269	2269	100.0%
Right Side	2269	2269	100.0%
Total	4538	4538	100.0%

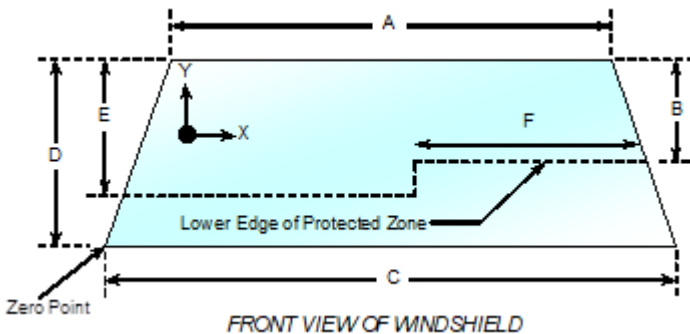

FRONT VIEW OF WINDSHIELD

Item	Units	Value
A	mm	1207
B	mm	408
C	mm	1380
D	mm	975
E	mm	593
F	mm	510

AREAS OF PROTECTED ZONE FAILURES

A. Provide Coordinates of the area that the protected zone was penetrated more than 0.25 inches by a vehicle component other than one that is normally in contact with the windshield.

X	Y

B. Provide coordinates of the area beneath the protected zone that the inner surface of the windshield was penetrated by a vehicle component.

X	Y

DATA SHEET NO. 15 ... (CONTINUED)

SUMMARY OF FMVSS 212, 219 (PARTIAL), AND 301 DATA

Test Vehicle: 2019 Honda CR-V AWD LX 5-Door MPV NHTSA No.: M20195300

Test Program: 56.3 km/h Frontal Impact NCAP Test Test Date: 05/30/19

FMVSS 301 FUEL SYSTEM INTEGRITY POST IMPACT DATA

Temperature at Time of Impact: 29.4° C Test Time: 12:33 PM

Stoddard Solvent Spillage Measurements


- A. From impact until vehicle motion ceases: 0 oz.
(Maximum allowable = 1 oz.)
- B. For the 5 minute period after motion ceases: 0 oz.
(Maximum allowable = 5 oz.)
- C. For the following 25 minutes: 0 oz.
(Maximum allowable = 1 oz./minute)
- D. Spillage: There was no Stoddard solvent spillage.

DATA SHEET NO. 16

FMVSS 301 STATIC ROLLOVER RESULTS

Test Vehicle: 2019 Honda CR-V AWD LX 5-Door MPV NHTSA No.: M20195300

Test Program: 56.3 km/h Frontal Impact NCAP Test Test Date: 05/30/19

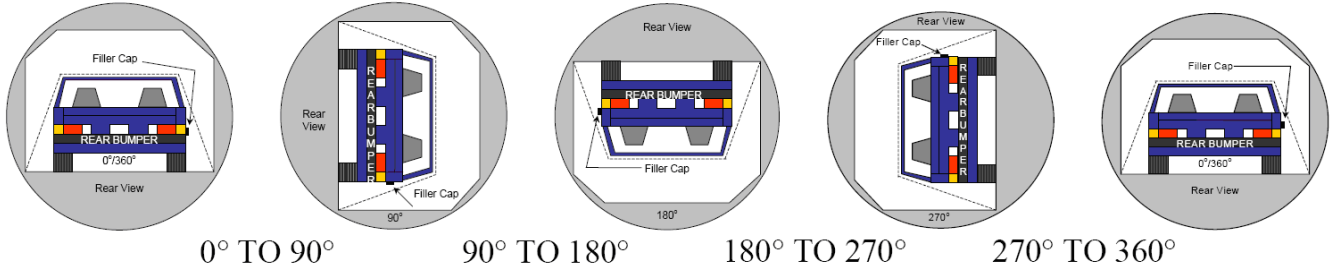

1. The specified fixture rollover rate for each 90° of rotation is 60 to 180 seconds.
2. The position hold time at each position is 300 seconds (minimum).
3. Details of Stoddard solvent spillage: There was no Stoddard solvent spillage.

SOLVENT COLLECTION TIME TABLE IN SECONDS

Test Phase	Rotation Time	Hold Time	Total Time
0° To 90°	82	300	382
90° To 180°	80	300	380
180° To 270°	79	300	379
270° To 360°	82	300	382

FMVSS 301 SPILLAGE TABLE

Test Phase	First 5 Minutes	Sixth Minute	Seventh Minute	Eighth Minute
0° To 90°	0			
90° To 180°	0			
180° To 270°	0			
270° To 360°	0			

SOLVENT SPILLAGE LOCATION TABLE


Test Phase	Spillage Location
0° To 90°	
90° To 180°	
180° To 270°	
270° To 360°	

DATA SHEET NO. 17

DUMMY / VEHICLE TEMPERATURE STABILIZATION CHART

Test Vehicle: 2019 Honda CR-V AWD LX 5-Door MPV NHTSA No.: M20195300

Test Program: 56.3 km/h Frontal Impact NCAP Test Test Date: 05/30/19

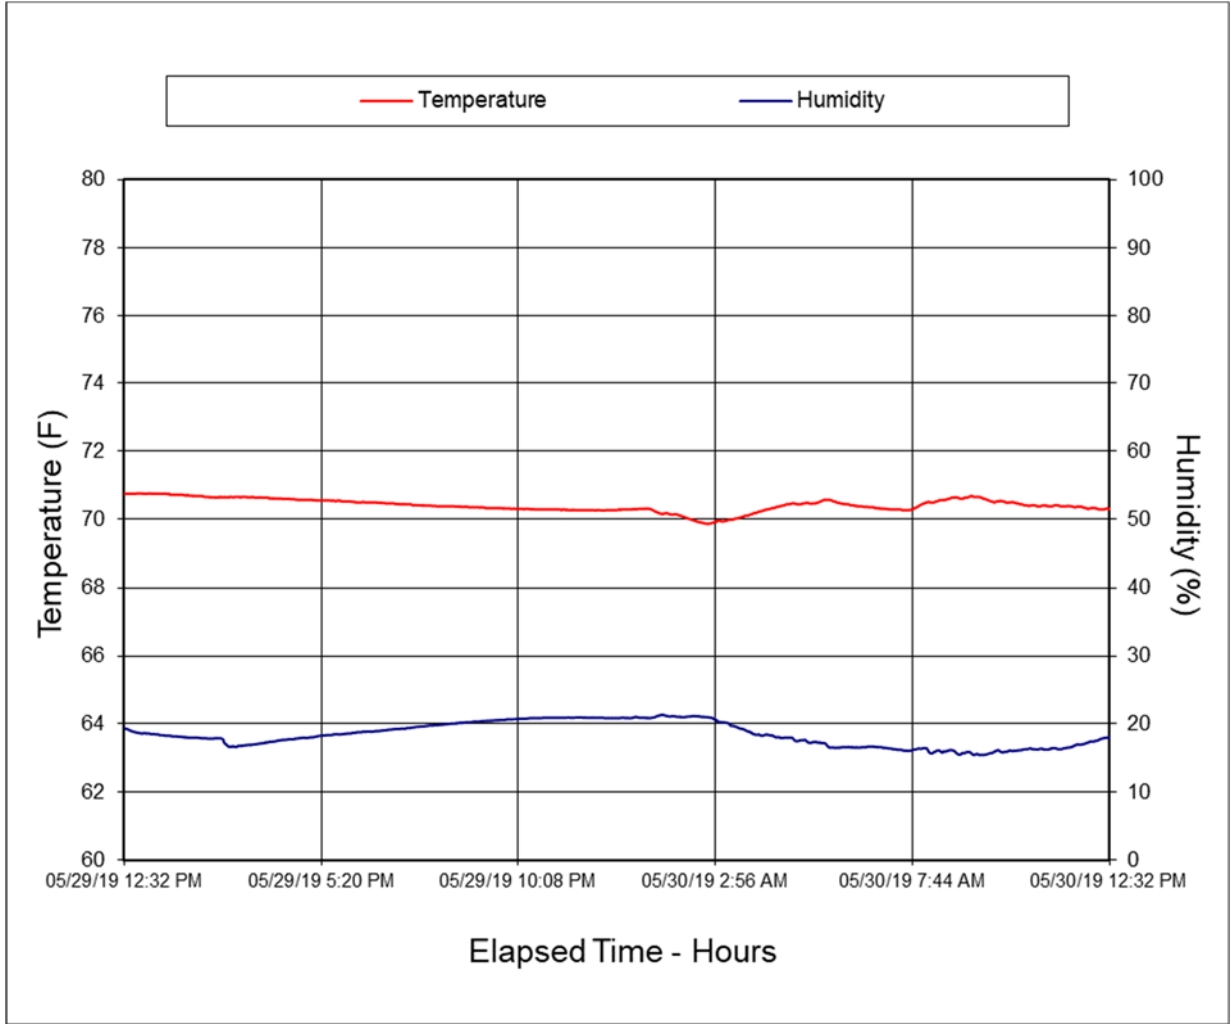

**APPENDIX A
PHOTOGRAPHS**

TABLE OF PHOTOGRAPHS

Figure		Page
1	Load Cell Location	A-1
2	Pre-Test Load Cell Wall	A-1
3	Post-Test Load Cell Wall	A-2
4	Manufacturer's Label	A-2
5	Tire Placard	A-3
6	2019 Honda CR-V AWD LX Frontal as Delivered	A-3
7	Left Rear $\frac{3}{4}$ View, as Received	A-4
8	Pre-Test Front View of Test Vehicle	A-4
9	Post-Test Front View of Test Vehicle	A-5
10	Pre-Test Left View of Test Vehicle	A-5
11	Post-Test Left View of Test Vehicle	A-6
12	Pre-Test Right View of Test Vehicle	A-6
13	Post-Test Right View of Test Vehicle	A-7
14	Pre-Test Right Front $\frac{3}{4}$ View	A-7
15	Post-Test Right Front $\frac{3}{4}$ View	A-8
16	Pre-Test Left Rear $\frac{3}{4}$ View	A-8
17	Post-Test Left Rear $\frac{3}{4}$ View	A-9
18	Pre-Test Windshield View	A-9
19	Post-Test Windshield View	A-10
20	Pre-Test Engine Compartment View	A-10
21	Post-Test Engine Compartment View	A-11
22	Pre-Test Fuel Filler Cap View	A-11
23	Post-Test Fuel Filler Cap View	A-12
24	Pre-Test Front Underbody View	A-12
25	Post-Test Front Underbody View	A-13
26	Pre-Test Rear Underbody View	A-13
27	Post-Test Rear Underbody View	A-14
28	Pre-Test Dummy Cable Routing	A-14
29	Post-Test Dummy Cable Routing	A-15
30	Pre-Test Driver Dummy Front View	A-15
31	Post-Test Driver Dummy Front View	A-16
32	Pre-Test Driver Dummy Window View	A-16
33	Post-Test Driver Dummy Window View	A-17
34	Pre-Test Driver Dummy and Vehicle Interior View	A-17
35	Post-Test Driver Dummy and Vehicle Interior View	A-18
36	Pre-Test Driver's Seat Fore-Aft Markings	A-18

TABLE OF PHOTOGRAPHS ... (CONTINUED)

Figure		Page
37	Post-Test Driver's Seat Fore-Aft Markings	A-19
38	Pre-Test View of Belt Anchorage for Driver Dummy	A-19
39	Post-Test View of Belt Anchorage for Driver Dummy	A-20
40	Pre-Test Driver Dummy Feet	A-20
41	Post-Test Driver Dummy Feet	A-21
42	Pre-Test Driver's Side Knee Bolster	A-21
43	Post-Test Driver's Side Knee Bolster	A-22
44	Pre-Test Driver's Side Floorpan	A-22
45	Post-Test Driver's Side Floorpan	A-23
46	Post-Test Driver Dummy Face	A-23
47	Post-Test Driver Dummy Contact with Airbag	A-24
48	Post-Test Driver Dummy Contact with Headrest	A-24
48a	Post-Test Driver Dummy Contact with Knee Bolster	A-25
48b	Post-Test Driver Dummy Contact with Steering Column	A-25
49	Pre-Test View of the Steering Wheel	A-26
50	Post-Test View of the Steering Wheel	A-26
51	Pre-Test Passenger Dummy Front View	A-27
52	Post-Test Passenger Dummy Front View	A-27
53	Pre-Test Passenger Dummy Window View	A-28
54	Post-Test Passenger Dummy Window View	A-28
55	Pre-Test Passenger Dummy and Vehicle Interior View	A-29
56	Post-Test Passenger Dummy and Vehicle Interior View	A-29
57	Pre-Test Passenger's Seat Fore-Aft Markings	A-30
58	Post-Test Passenger's Seat Fore-Aft Markings	A-30
59	Pre-Test View of Belt Anchorage for Passenger Dummy	A-31
60	Post-Test View of Belt Anchorage for Passenger Dummy	A-31
61	Pre-Test Passenger Dummy Feet	A-32
62	Post-Test Passenger Dummy Feet	A-32
63	Pre-Test Passenger's Side Knee Bolster	A-33
64	Post-Test Passenger's Side Knee Bolster	A-33
65	Pre-Test Passenger's Side Floorpan	A-34
66	Post-Test Passenger's Side Floorpan	A-34
67	Post-Test Passenger Dummy Face	A-35
68	Post-Test Passenger Dummy Contact with Airbag	A-35
69	Post-Test Passenger Dummy Contact with Headrest	A-36
69a	Post-Test Passenger Dummy Contact with Glovebox	A-36

TABLE OF PHOTOGRAPHS ... (CONTINUED)

<u>Figure</u>		<u>Page</u>
70	Photograph of Ballast Installed in Vehicle	A-37
71	Post-Test Stoddard Solvent Spillage Location View	A-37
72	Post-Test Speed Trap Read-Out	A-38
73	Vehicle at 0° on Static Rollover Device	A-38
74	Vehicle at 90° on Static Rollover Device	A-39
75	Vehicle at 180° on Static Rollover Device	A-39
76	Vehicle at 270° on Static Rollover Device	A-40
77	Vehicle at 360° on Static Rollover Device	A-40
78	2019 Honda CR-V AWD LX Frontal Impact Event	A-41
79	Monroney Label Photograph	A-41

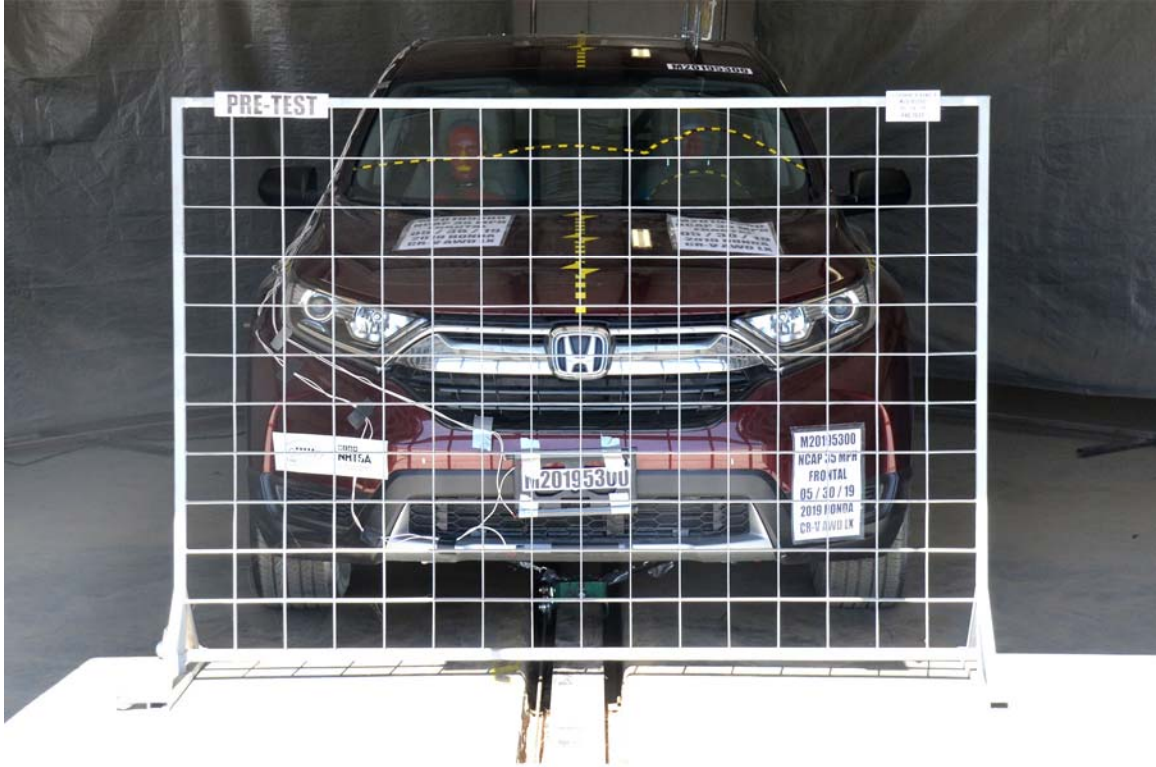


FIGURE 1. Load Cell Location



FIGURE 2. Pre-Test Load Cell Wall



FIGURE 3. Post-Test Load Cell Wall



FIGURE 4. Manufacturer's Label

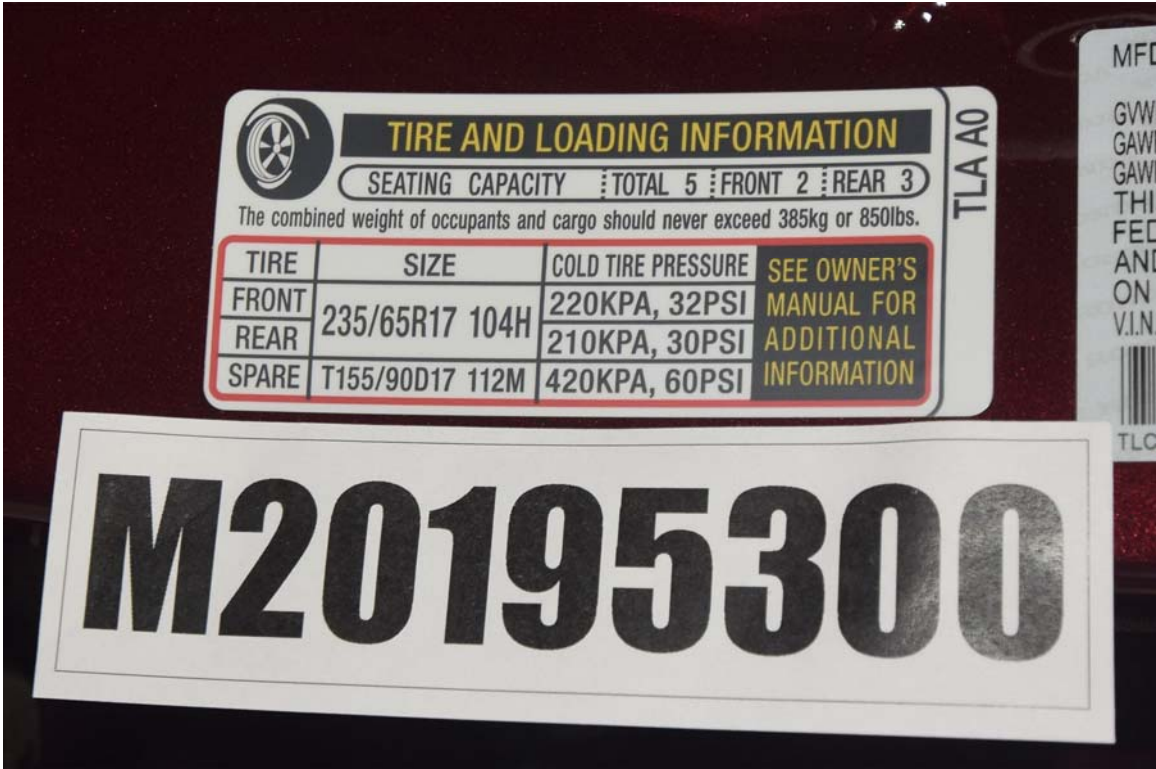


FIGURE 5. Tire Placard



FIGURE 6. 2019 Honda CR-V AWD LX Frontal as Delivered



FIGURE 7. Left Rear $\frac{3}{4}$ View, as Received



FIGURE 8. Pre-Test Front View of Test Vehicle



FIGURE 9. Post-Test Front View of Test Vehicle



FIGURE 10. Pre-Test Left View of Test Vehicle

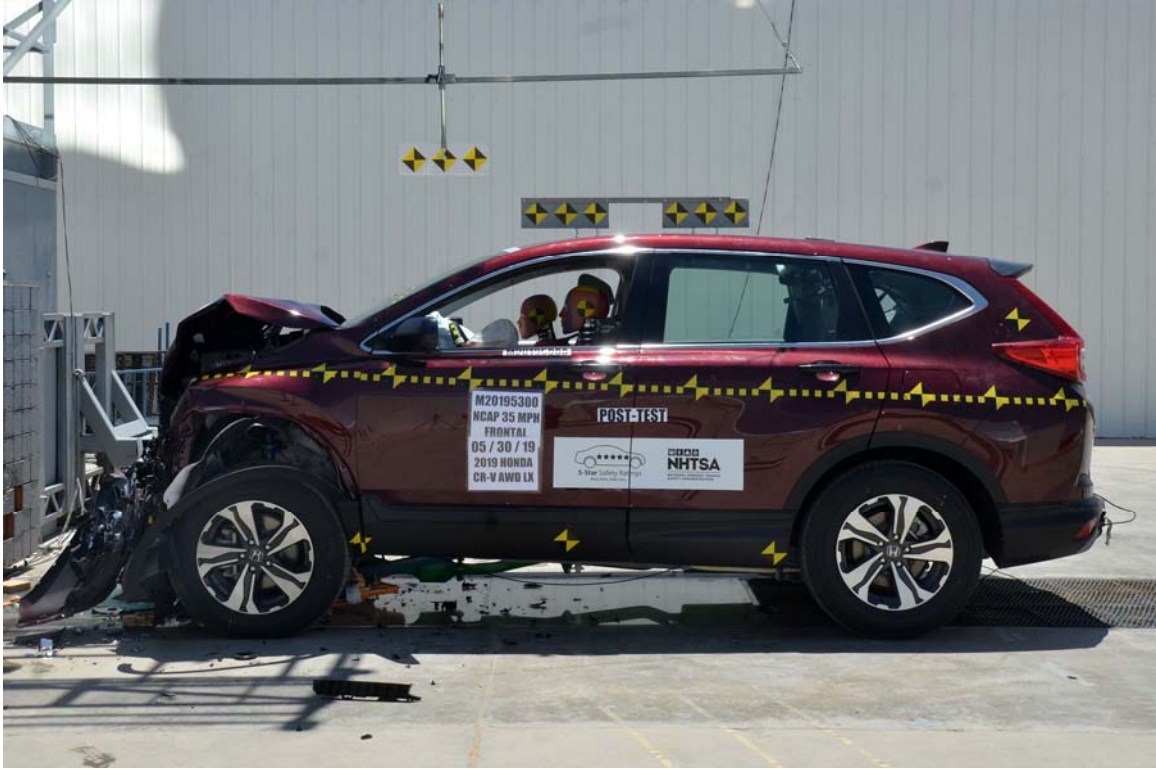


FIGURE 11. Post-Test Left View of Test Vehicle



FIGURE 12. Pre-Test Right View of Test Vehicle



FIGURE 13. Post-Test Right View of Test Vehicle



FIGURE 14. Pre-Test Right Front 3/4 View



FIGURE 15. Post-Test Right Front $\frac{3}{4}$ View



FIGURE 16. Pre-Test Left Rear $\frac{3}{4}$ View



FIGURE 17. Post-Test Left Rear $\frac{3}{4}$ View

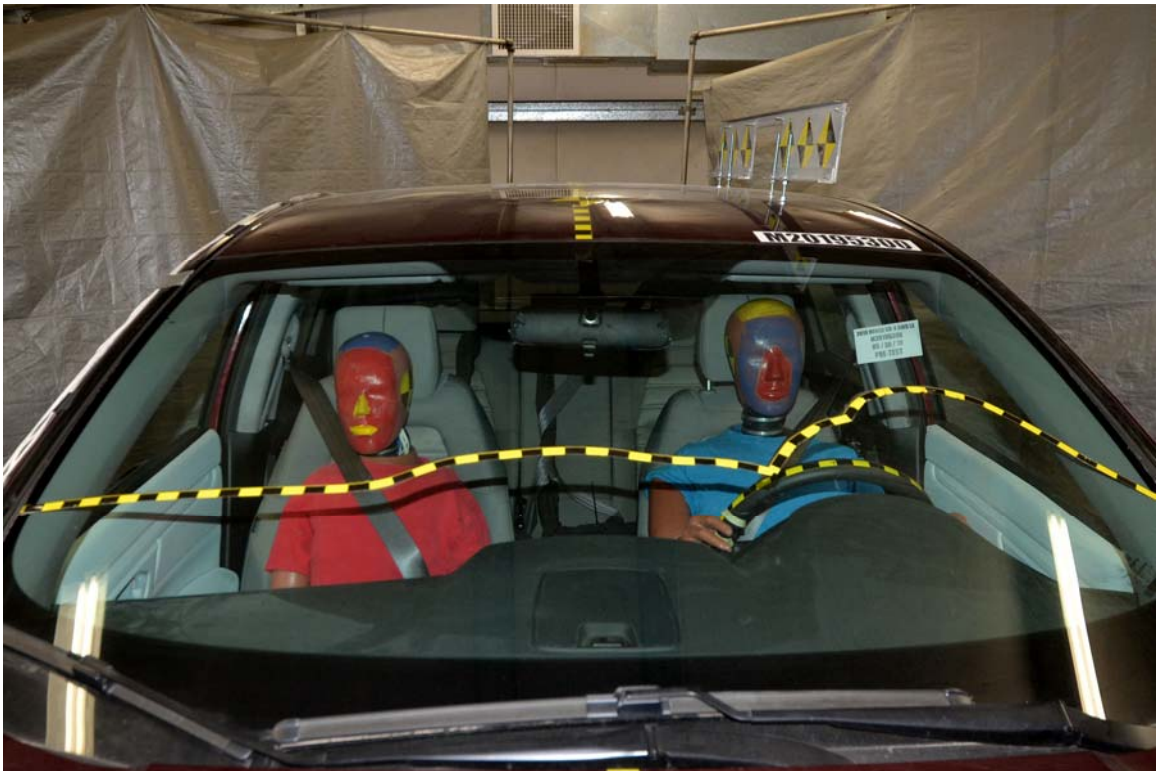


FIGURE 18. Pre-Test Windshield View



FIGURE 19. Post-Test Windshield View



FIGURE 20. Pre-Test Engine Compartment View



FIGURE 21. Post-Test Engine Compartment View



FIGURE 22. Pre-Test Fuel Filler Cap View



FIGURE 25. Post-Test Front Underbody View

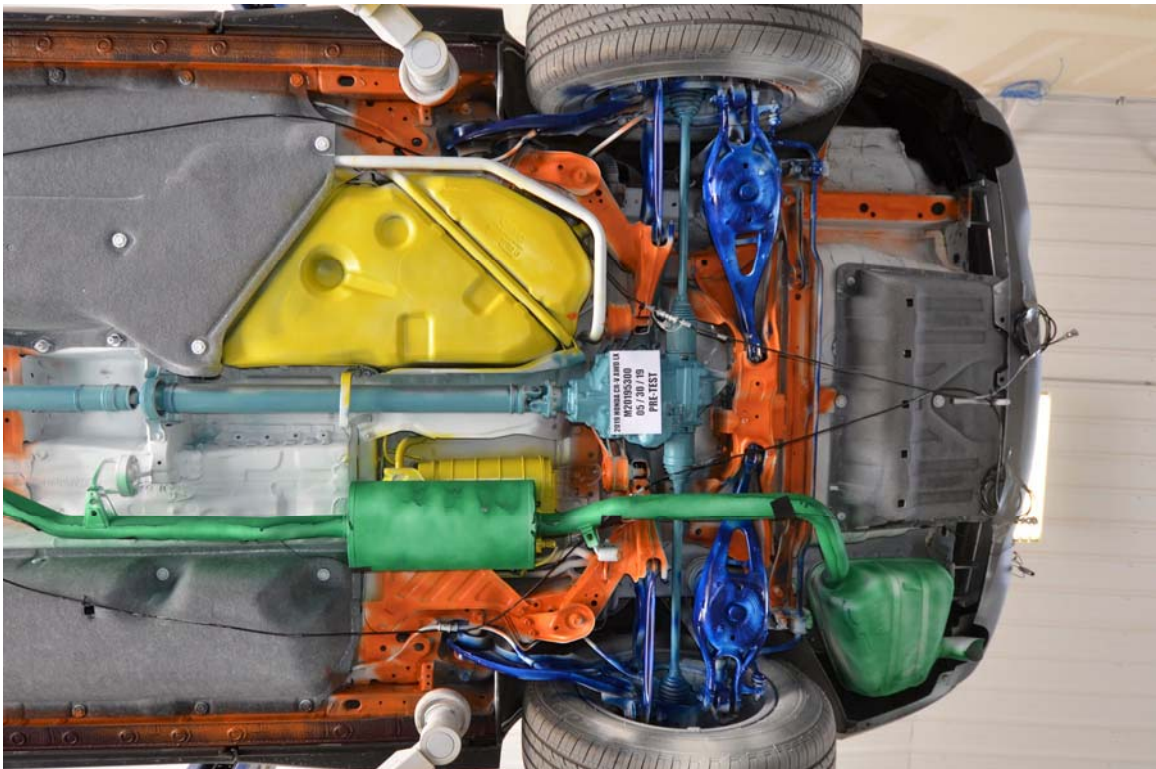


FIGURE 26. Pre-Test Rear Underbody View

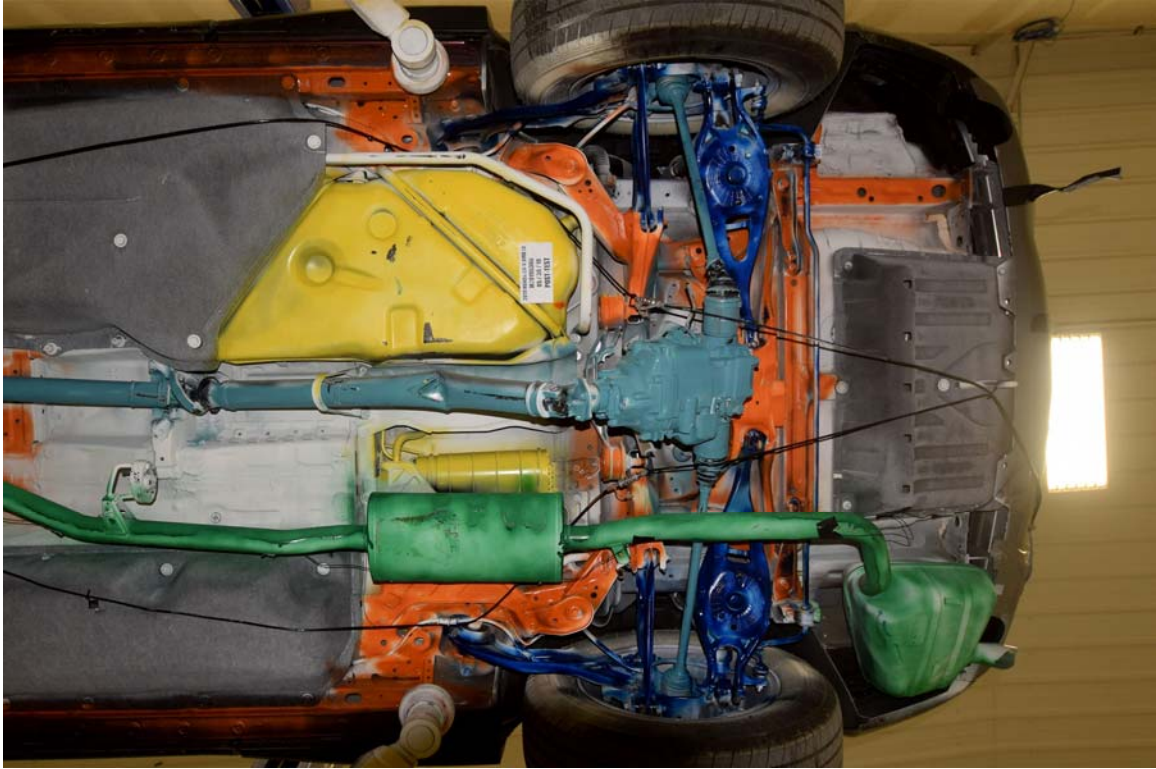


FIGURE 27. Post-Test Rear Underbody View



FIGURE 28. Pre-Test Dummy Cable Routing



FIGURE 29. Post-Test Dummy Cable Routing



FIGURE 30. Pre-Test Driver Dummy Front View



FIGURE 31. Post-Test Driver Dummy Front View



FIGURE 32. Pre-Test Driver Dummy Window View



FIGURE 33. Post-Test Driver Dummy Window View



FIGURE 34. Pre-Test Driver Dummy and Vehicle Interior View



FIGURE 35. Post-Test Driver Dummy and Vehicle Interior View



FIGURE 36. Pre-Test Driver's Seat Fore-Aft Markings



FIGURE 37. Post-Test Driver's Seat Fore-Aft Markings



FIGURE 38. Pre-Test View of Belt Anchorage for Driver Dummy



FIGURE 39. Post-Test View of Belt Anchorage for Driver Dummy



FIGURE 40. Pre-Test Driver Dummy Feet



FIGURE 41. Post-Test Driver Dummy Feet



FIGURE 42. Pre-Test Driver's Side Knee Bolster



FIGURE 43. Post-Test Driver's Side Knee Bolster



FIGURE 44. Pre-Test Driver's Side Floorpan



FIGURE 45. Post-Test Driver's Side Floorpan



FIGURE 46. Post-Test Driver Dummy Face



FIGURE 47. Post-Test Driver Dummy Contact with Airbag



FIGURE 48. Post-Test Driver Dummy Contact with Headrest



FIGURE 48a. Post-Test Driver Dummy Contact with Knee Bolster



FIGURE 48b. Post-Test Driver Dummy Contact with Steering Column



FIGURE 49. Pre-Test View of the Steering Wheel

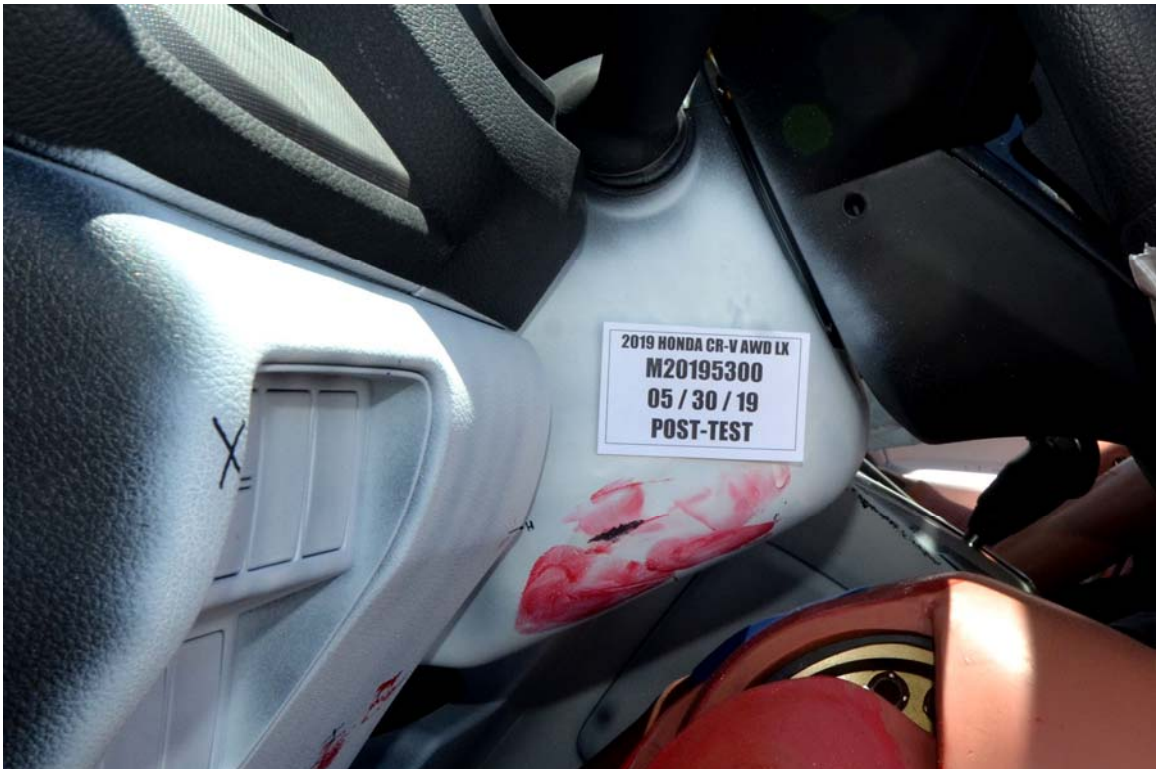


FIGURE 50. Post-Test View of the Steering Wheel



FIGURE 51. Pre-Test Passenger Dummy Front View



FIGURE 52. Post-Test Passenger Dummy Front View



FIGURE 53. Pre-Test Passenger Dummy Window View



FIGURE 54. Post-Test Passenger Dummy Window View



FIGURE 55. Pre-Test Passenger Dummy and Vehicle Interior View



FIGURE 56. Post-Test Passenger Dummy and Vehicle Interior View



FIGURE 57. Pre-Test Passenger's Seat Fore-Aft Markings



FIGURE 58. Post-Test Passenger's Seat Fore-Aft Markings



FIGURE 59. Pre-Test View of Belt Anchorage for Passenger Dummy



FIGURE 60. Post-Test View of Belt Anchorage for Passenger Dummy



FIGURE 61. Pre-Test Passenger Dummy Feet



FIGURE 62. Post-Test Passenger Dummy Feet



FIGURE 63. Pre-Test Passenger's Side Knee Bolster



FIGURE 64. Post-Test Passenger's Side Knee Bolster



FIGURE 65. Pre-Test Passenger's Side Floorpan



FIGURE 66. Post-Test Passenger's Side Floorpan



FIGURE 67. Post-Test Passenger Dummy Face



FIGURE 68. Post-Test Passenger Dummy Contact with Airbag



FIGURE 69. Post-Test Passenger Dummy Contact with Headrest



FIGURE 69a. Post-Test Passenger Dummy Contact with Glove Box

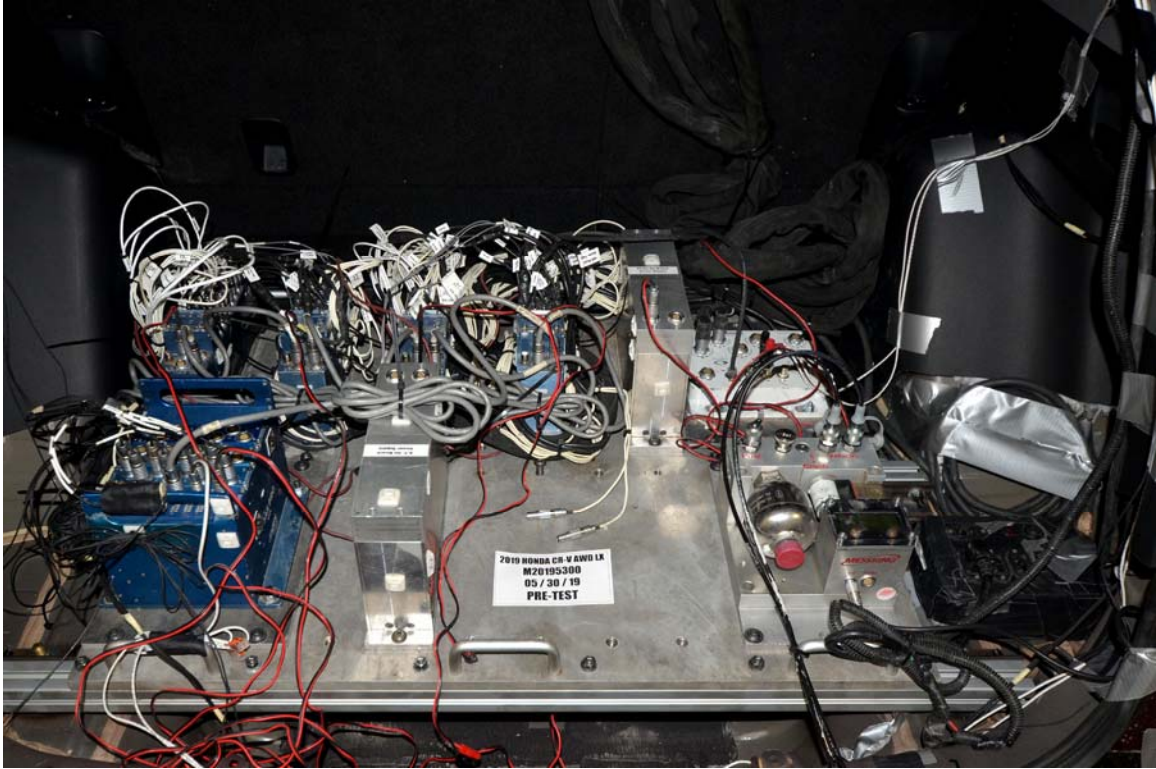


FIGURE 70. Photograph of Ballast Installed in Vehicle

Photograph Not Applicable

No Stoddard Solvent Spillage

FIGURE 71. Post-Test Stoddard Solvent Spillage Location View



FIGURE 72. Post-Test Speed Trap Read-Out



FIGURE 73. Vehicle at 0° on Static Rollover Device



FIGURE 74. Vehicle at 90° on Static Rollover Device

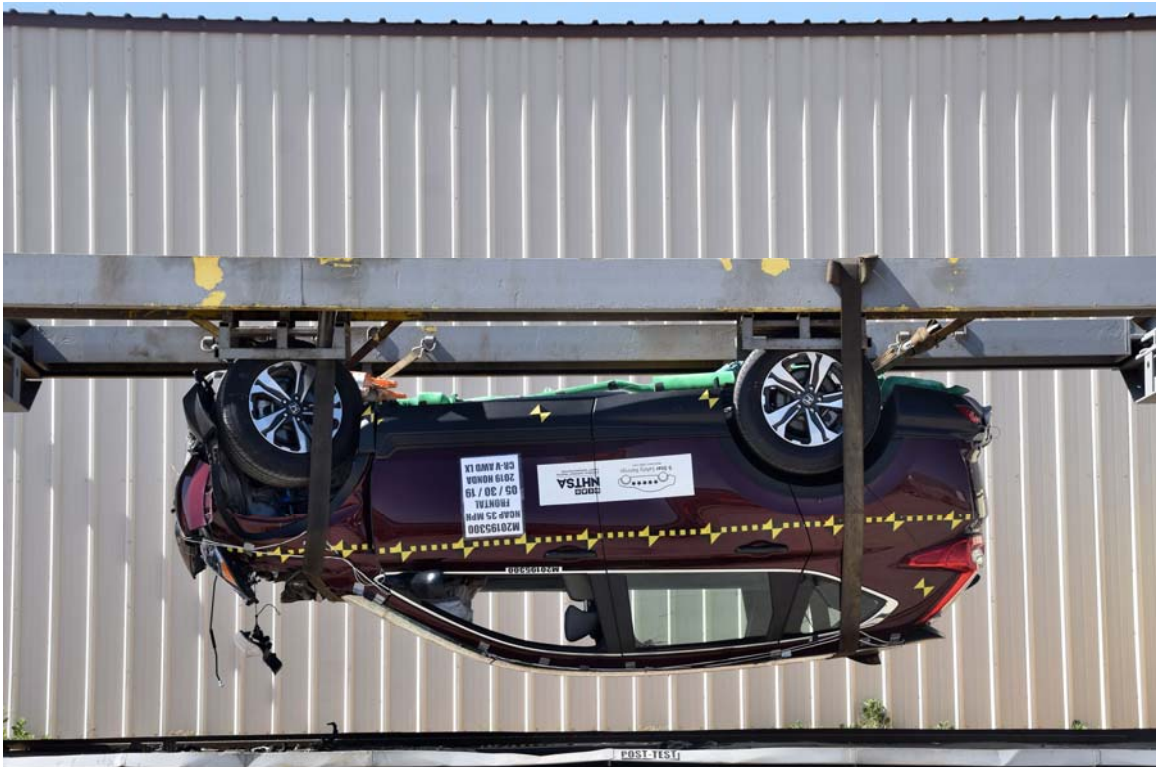


FIGURE 75. Vehicle at 180° on Static Rollover Device

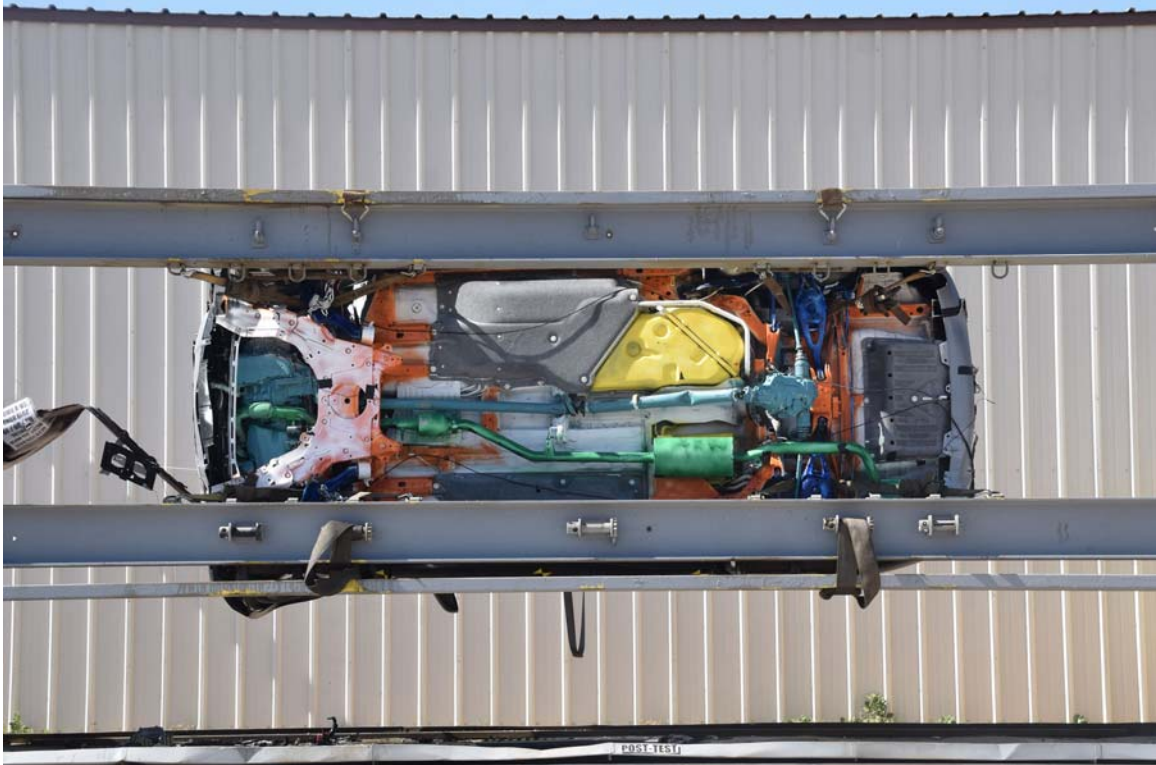


FIGURE 76. Vehicle at 270° on Static Rollover Device



FIGURE 77. Vehicle at 360° on Static Rollover Device



FIGURE 78. 2019 Honda CR-V AWD LX Frontal Impact Event

HONDA		2019 CR-V 2.4L AWD LX <small>EXT. BASQUE RED P. II ENGINE NUMBER: K24WE-S009251</small> <small>INT. GRAY</small>		EPA DOT Fuel Economy and Environment		Gasoline Vehicle													
STANDARD EQUIPMENT AT NO EXTRA COST TECHNICAL FEATURES* <ul style="list-style-type: none"> • 180hp 2.4L I-4 VTEC 4-Cyl. Direct-Injection Engine • All-Wheel Drive System • Continuously Variable Transmission • CVT • 4-Wheel Disc Brakes • Front MacPherson Strut Suspension • Rear Multi-Link Suspension • Electric Power Steering SAFETY FEATURES* <ul style="list-style-type: none"> • Driver's and Front Passenger's Airbags • Driver's and Front Passenger's Side Airbags • Side Curtain Airbags with Roll-over Sensor • Vehicle Stability Assist (VSA) • Anti-Lock Braking System (ABS) • Electronic Brake Distribution (EBD) • Brake Assist • Tire Pressure Monitoring System • LED Daytime Running Lights • LATCH System for Child Seats INTERIOR FEATURES* <ul style="list-style-type: none"> • Audio System with 4 Speakers • Color LCD Screen and Multi-View Rear Camera 		MANUFACTURER'S SUGGESTED RETAIL PRICE \$25,750.00 <small>Full Tank of Fuel No Charge</small> <hr/> <small>Honda Roadside Assistance</small> 3YR/50K Mile Warranty Term		Fuel Economy 27 MPG <small>combined city/hwy 25 city 31 highway</small> 3.7 gal/100 mi <small>Small SUVs range from 18 to 23 MPG. The best vehicle rates 130 MPG.</small>		You spend \$0 in fuel costs over 5 years compared to the average new vehicle.													
EXTERIOR FEATURES* <ul style="list-style-type: none"> • Bluetooth HandsFreeLink • USB Audio Interface • Automatic Climate Control System with Air Filtration System • Driver's Seat Height Adjustment • Front Center Console • Rear Console Vents • 60/40 Split Fold-Down Rear Seatback • Driver's Auto Up/Down Window • Power Windows and Door Locks • 12-Volt Power Outlets • Cruise Control • Electric Parking Brake • Floor Mats 		DESTINATION AND HANDLING 1,745.00		Fuel Economy & Greenhouse Gas Rating (mpg or ml) Smog Rating (toxicity only) <table border="1"> <tr> <td>1</td> <td>6</td> <td>10</td> <td>1</td> <td>5</td> <td>10</td> </tr> <tr> <td colspan="3">Best</td> <td colspan="3">Worst</td> </tr> </table> <small>This vehicle emits 328 grams CO₂ per mile. The best emits 12 grams per mile (toxicity only). Producing and distributing fuel also create emissions; learn more at fueleconomy.gov.</small>		1	6	10	1	5	10	Best			Worst			Annual fuel COST \$1,400 <small>Actual results will vary for many reasons, including driving conditions and how you drive and maintain your vehicle. The average new vehicle gets 27 MPG and costs \$7,000 in fuel over 5 years. Cost estimates are based on 15,000 miles per year at \$2.50 per gallon. Sample is miles per gasoline gallon equivalent. Vehicle emissions are a significant cause of climate change and smog.</small>	
1	6	10	1	5	10														
Best			Worst																
TOTAL VEHICLE PRICE <small>(includes Pre-Delivery Service)</small> \$26,755.00 <small>Licenses and title fees, state and local taxes, and dealer options and accessories are not included in the manufacturer's suggested retail price.</small>		PARTS CONTENT INFORMATION FOR VEHICLES IN THIS CARLINE <small>U.S./Canadian Parts Content: 45 %</small> Major Sources of Foreign Parts Content: JAPAN 30 %		GOVERNMENT 5-STAR SAFETY RATING Overall Vehicle Score Not Rated <small>Based on the combined ratings of frontal, side and rollover. Should ONLY be compared to other vehicles of similar size and weight.</small>		Frontal Crash Driver Passenger Not Rated <small>Based on the risk of injury in a frontal impact. Should ONLY be compared to other vehicles of similar size and weight.</small>													
FOR THIS VEHICLE <small>Final Assembly Plant:</small> EAST LIBERTY, OHIO USA <small>Country of Origin: Engine:</small> U.S.A <small>Transmission:</small> U.S.A		Side Crash Front seat Rear seat Not Rated <small>Based on the risk of injury in a side impact.</small>		Rollover ★★★★ <small>Based on the risk of rollover in a single vehicle crash.</small>		<small>Star Ratings range from 1 to 5 stars (*****) with 5 being the highest. Source: National Highway Traffic Safety Administration (NHTSA) www.safercar.gov or 1-888-327-4235</small>													
MULLER HONDA OF GURNEE <small>7000 GRAND AVENUE GURNEE, IL 60031</small> VIN: 5J3FRW6H37KL002072		<small>PORT OF ENTRY: EAST LIBERTY DELIVERY POINT: SCHAUMBURG SHEW: ROWSPACE: 5'8"-014 TRANS.METHOD: TRUCK</small>		<small>ORIG. YLR: 206663 RES. NO: 40474 HV CODE: HN-9945 EMISSION: 50 STATE CONTROL NO: 402933 DEALER: 206663</small>															

FIGURE 79. Monroney Label Photograph

APPENDIX B
DUMMY RESPONSE DATA TRACES

TABLE OF DATA PLOTS

<u>Plot</u>		<u>Page</u>
1	Driver Head Acceleration X Primary	B-1
2	Driver Head Acceleration Y Primary	B-1
3	Driver Head Acceleration Z Primary	B-1
4	Driver Head Resultant Acceleration Primary	B-1
5	Driver Chest X Deflection	B-2
6	Driver Upper Neck Force X	B-3
7	Driver Upper Neck Force Z	B-3
8	Driver Upper Neck Moment Y	B-3
9	Driver Nij	B-3
10	Driver Chest Acceleration X Primary	B-4
11	Driver Chest Acceleration Y Primary	B-4
12	Driver Chest Acceleration Z Primary	B-4
13	Driver Chest Resultant Acceleration Primary	B-4
14	Driver Left Femur Force Z	B-5
15	Driver Right Femur Force Z	B-5
16	Passenger Head Acceleration X Primary	B-6
17	Passenger Head Acceleration Y Primary	B-6
18	Passenger Head Acceleration Z Primary	B-6
19	Passenger Head Resultant Acceleration Primary	B-6
20	Passenger Chest X Deflection	B-7
21	Passenger Upper Neck Force X	B-8
22	Passenger Upper Neck Force Z	B-8
23	Passenger Upper Neck Moment Y	B-8
24	Passenger Nij	B-8
25	Passenger Chest Acceleration X Primary	B-9
26	Passenger Chest Acceleration Y Primary	B-9
27	Passenger Chest Acceleration Z Primary	B-9
28	Passenger Chest Resultant Acceleration Primary	B-9
29	Passenger Left Femur Force Z	B-10
30	Passenger Right Femur Force Z	B-10





The following additional dummy and vehicle response data can be found in the R&D section of the NHTSA website at www.nhtsa.gov

Driver Head X Acceleration Redundant
Driver Head Y Acceleration Redundant
Driver Head Z Acceleration Redundant
Driver Upper Neck Force Y
Driver Upper Neck Moment X
Driver Upper Neck Moment Z
Driver Chest X Acceleration Redundant
Driver Chest Y Acceleration Redundant
Driver Chest Z Acceleration Redundant
Driver Pelvis X
Driver Pelvis Y
Driver Pelvis Z
Driver Left Femur Force Z Redundant
Driver Right Femur Force Z Redundant
Driver Left Upper Tibia Moment X
Driver Left Upper Tibia Moment Y
Driver Left Upper Tibia Force Z
Driver Left Lower Tibia Moment X
Driver Left Lower Tibia Moment Y
Driver Left Lower Tibia Force Z
Driver Right Upper Tibia Moment X
Driver Right Upper Tibia Moment Y
Driver Right Upper Tibia Force Z
Driver Right Lower Tibia Moment X
Driver Right Lower Tibia Moment Y
Driver Right Lower Tibia Force Z
Driver Left Foot Fore Z
Driver Left Foot Aft X
Driver Left Foot Aft Z
Driver Right Foot Fore Z
Driver Right Foot Aft X
Driver Right Foot Aft Z
Driver Shoulder Belt Force
Driver Lap Belt Force
Passenger Head X Acceleration Redundant
Passenger Head Y Acceleration Redundant
Passenger Head Z Acceleration Redundant
Passenger Upper Neck Force X
Passenger Upper Neck Force Z
Passenger Upper Neck Moment Y
Passenger Chest X Acceleration Redundant
Passenger Chest Y Acceleration Redundant
Passenger Chest Z Acceleration Redundant

Passenger Pelvis X
Passenger Pelvis Y
Passenger Pelvis Z
Passenger Left Femur Force Redundant
Passenger Right Femur Force Redundant
Passenger Left Upper Tibia Moment X
Passenger Left Upper Tibia Moment Y
Passenger Left Upper Tibia Force Z
Passenger Left Lower Tibia Moment X
Passenger Left Lower Tibia Moment Y
Passenger Left Lower Tibia Force Z
Passenger Right Upper Tibia Moment X
Passenger Right Upper Tibia Moment Y
Passenger Right Upper Tibia Force Z
Passenger Right Lower Tibia Moment X
Passenger Right Lower Tibia Moment Y
Passenger Right Lower Tibia Force Z
Passenger Left Foot Fore Z
Passenger Left Foot Aft X
Passenger Left Foot Aft Z
Passenger Right Foot Fore Z
Passenger Right Foot Aft X
Passenger Right Foot Aft Z
Passenger Shoulder Belt Force
Passenger Lap Belt Force
Left Rear Seat Crossmember X
Left Rear Seat Crossmember Z
Right Rear Seat Crossmember X
Right Rear Seat Crossmember Z
Left Rear Seat Crossmember X Redundant
Right Rear Seat Crossmember X Redundant
Vehicle Engine Top X
Vehicle Engine Bottom X
Load Cell Barrier Forces and Moments


Test Vehicle: 2019 Honda CR-V AWD LX 5-Door MPV
Test Program: 56.3 km/h Frontal Impact NCAP Test





NHTSA No.: M20195300
Test Date: 5/30/2019

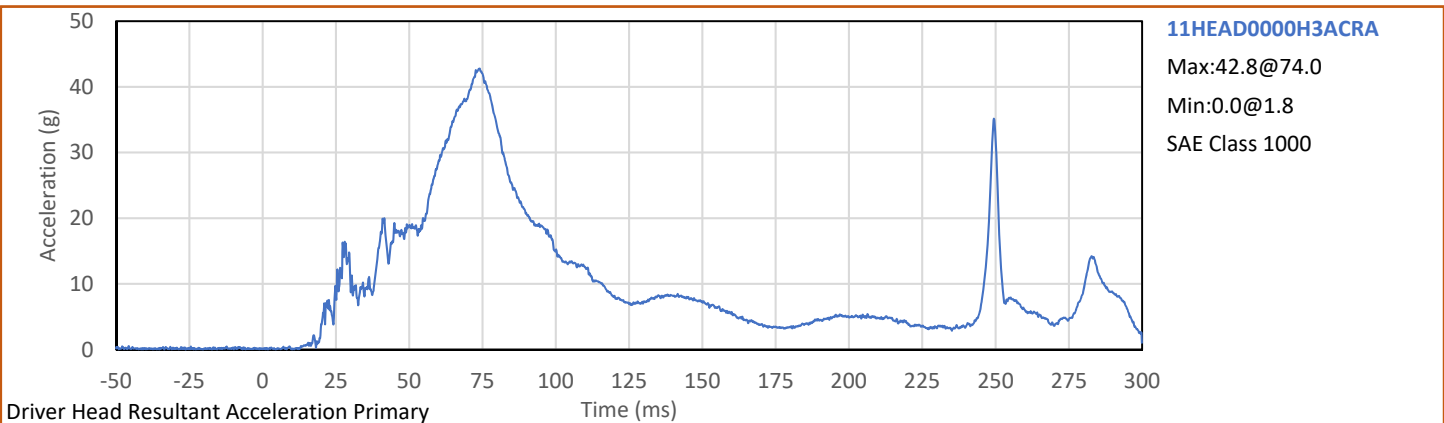
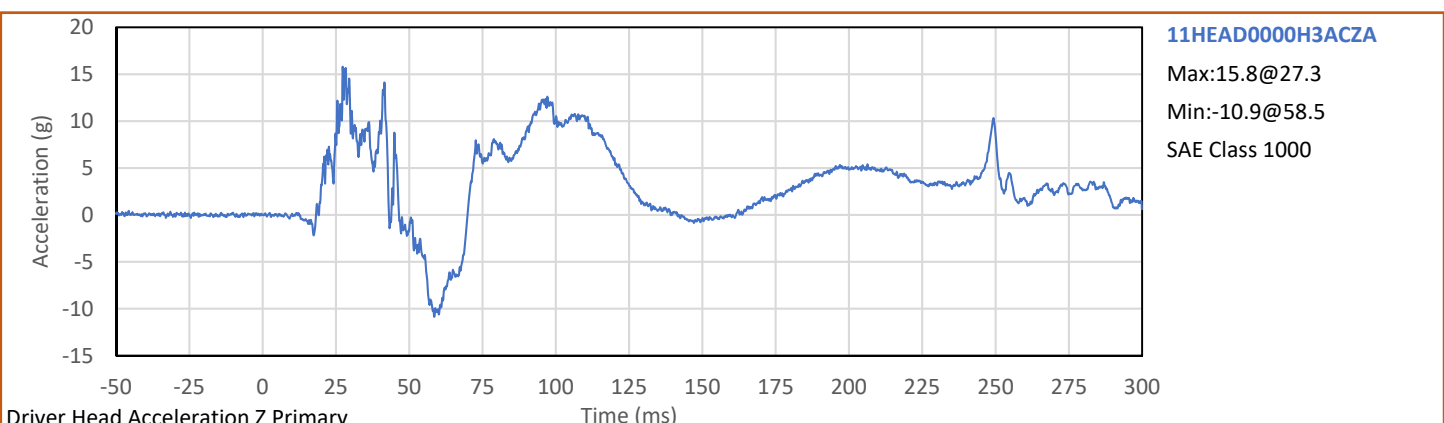
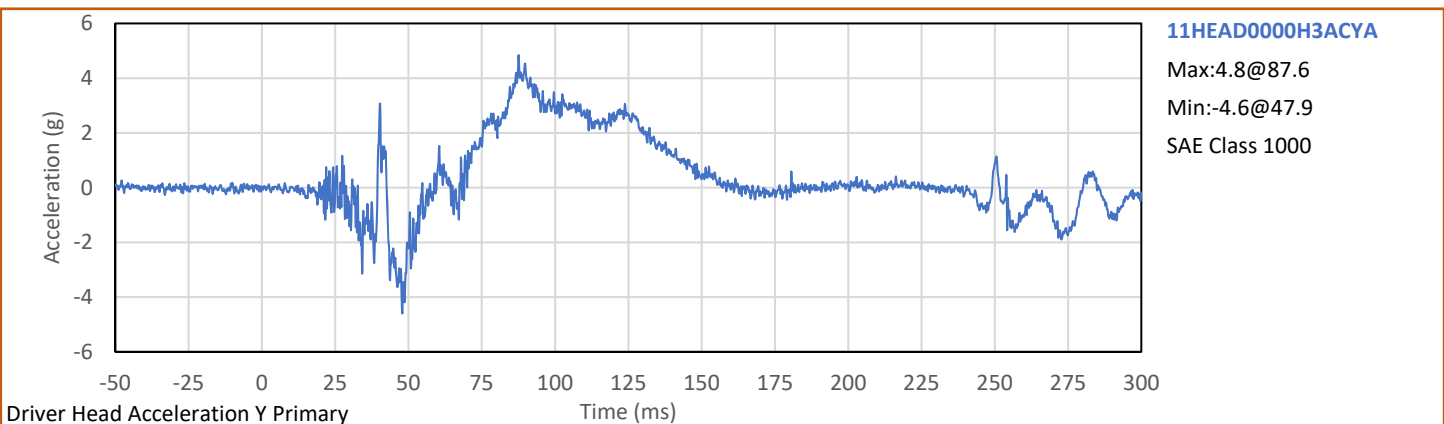
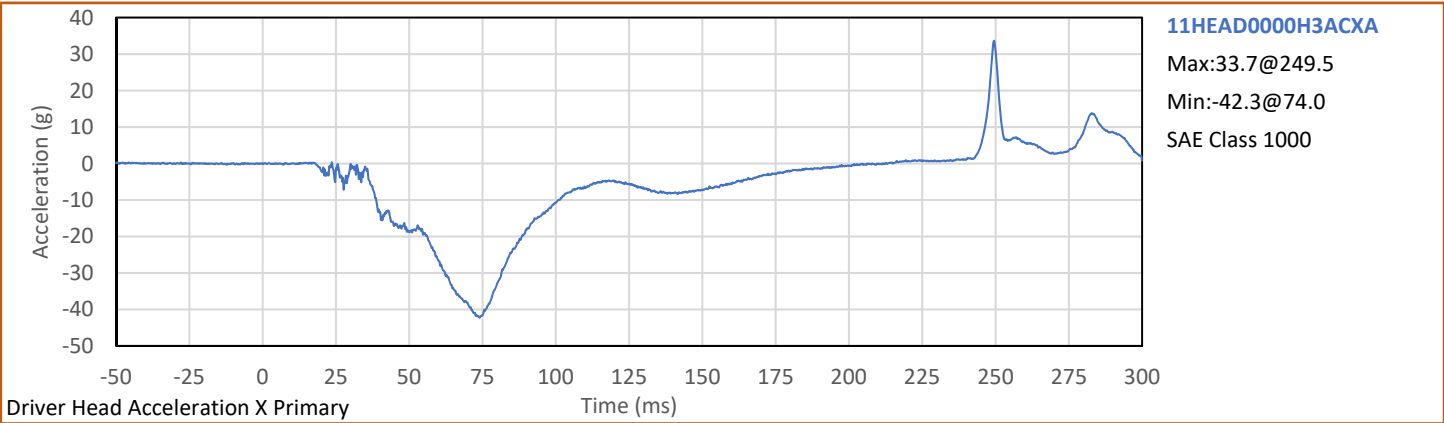


Test Vehicle: 2019 Honda CR-V AWD LX 5-Door MPV
Test Program: 56.3 km/h Frontal Impact NCAP Test

NHTSA No.: M20195300
Test Date: 5/30/2019


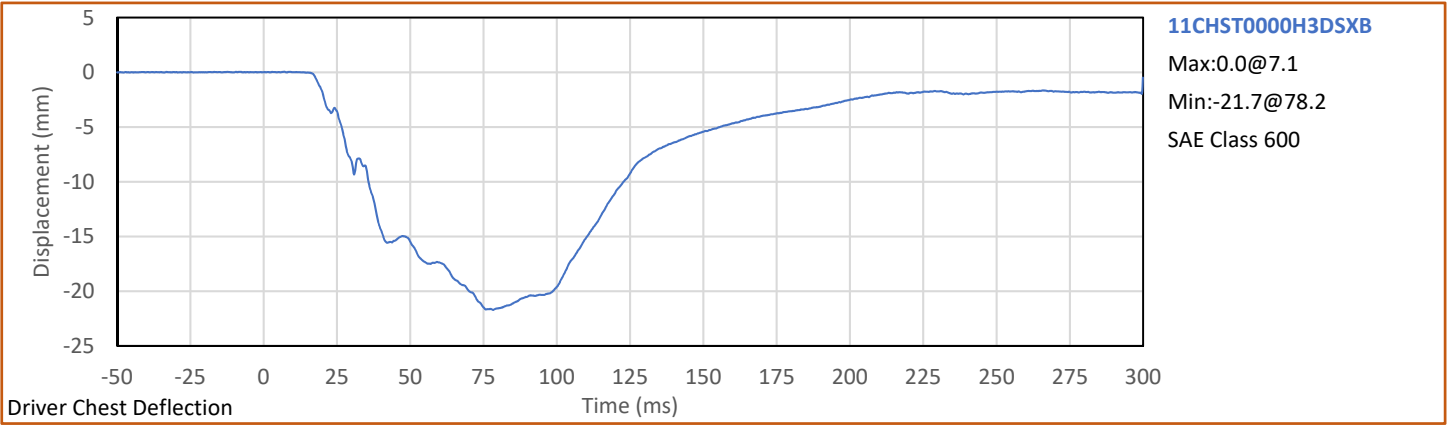


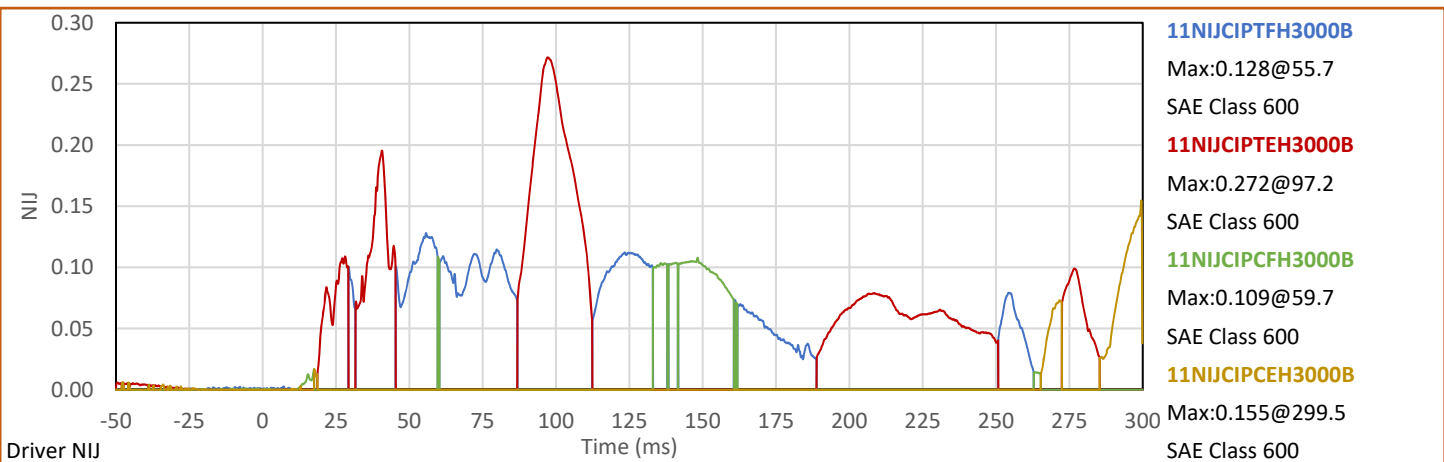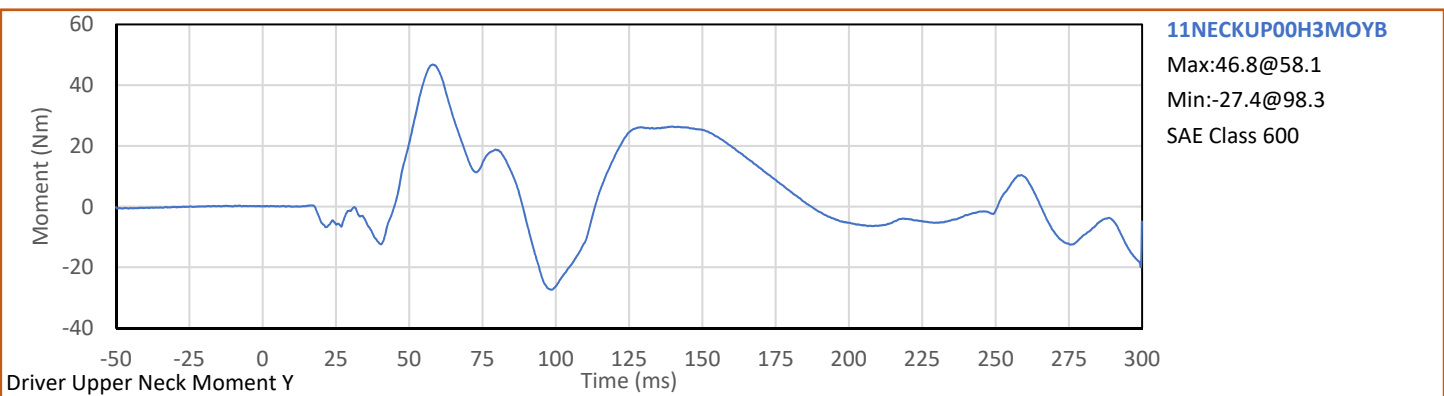
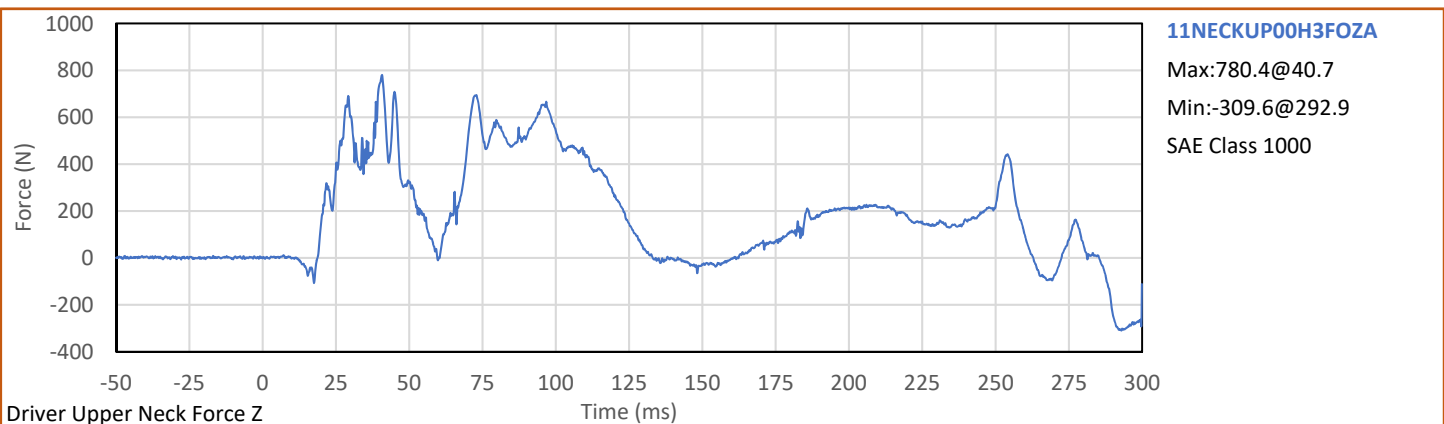
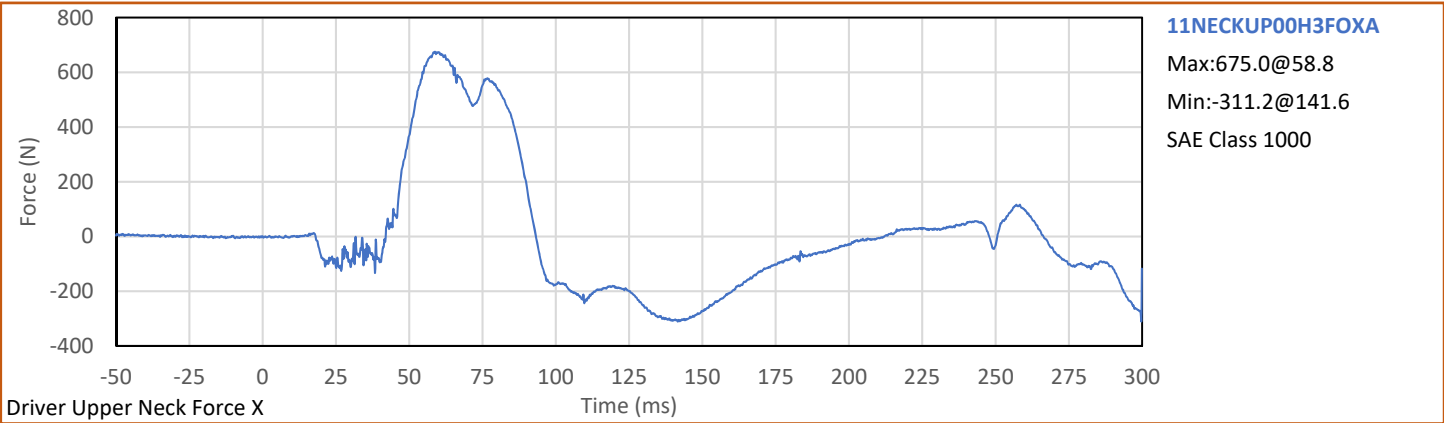


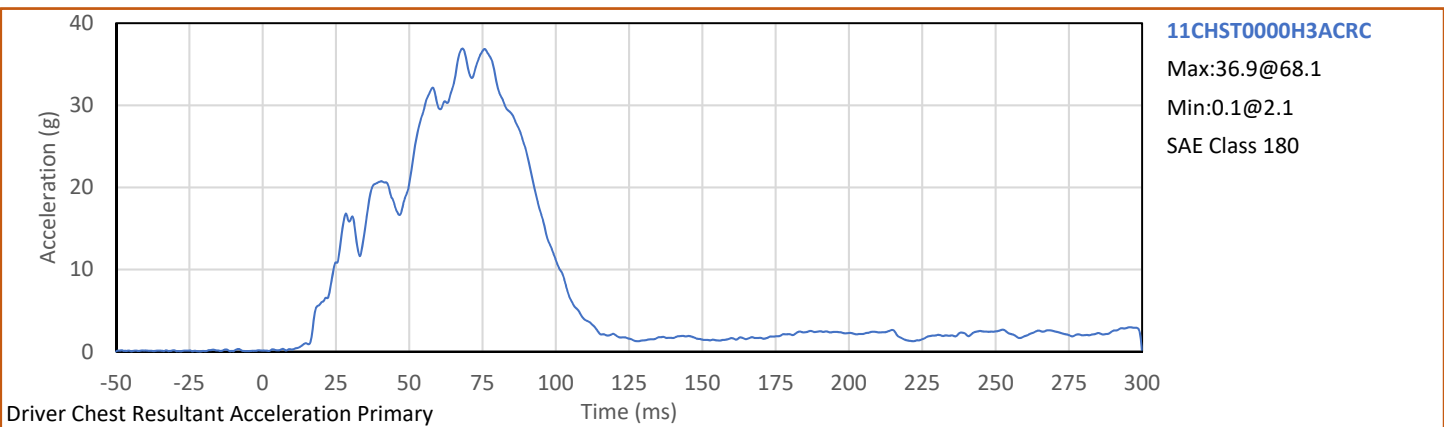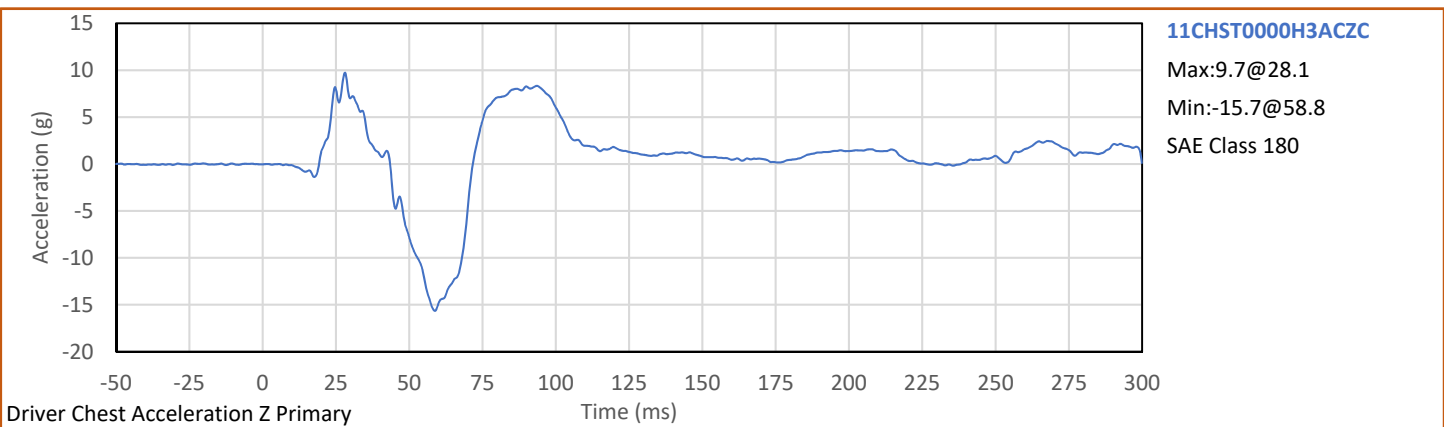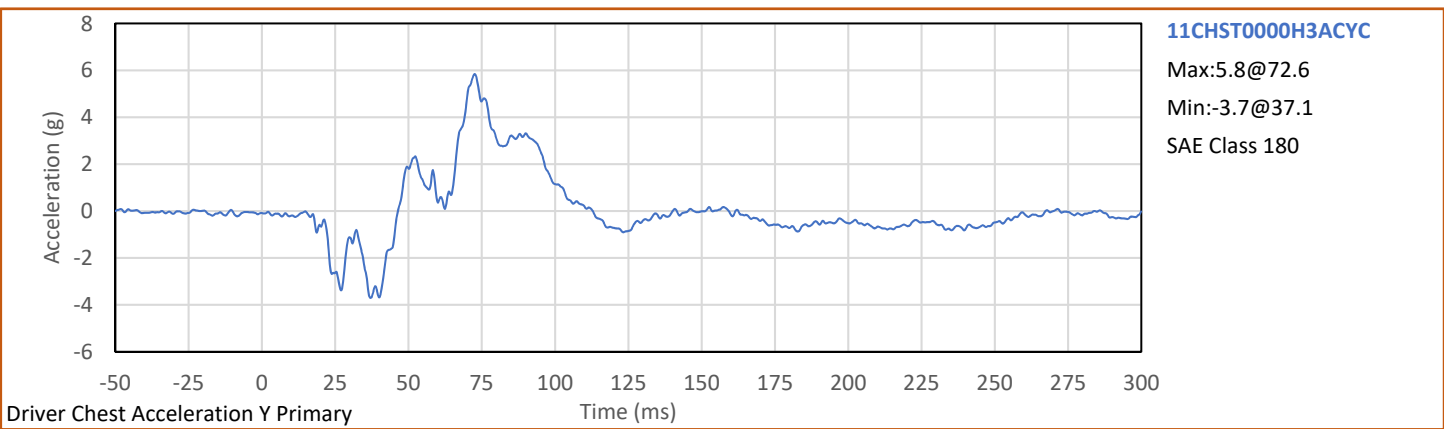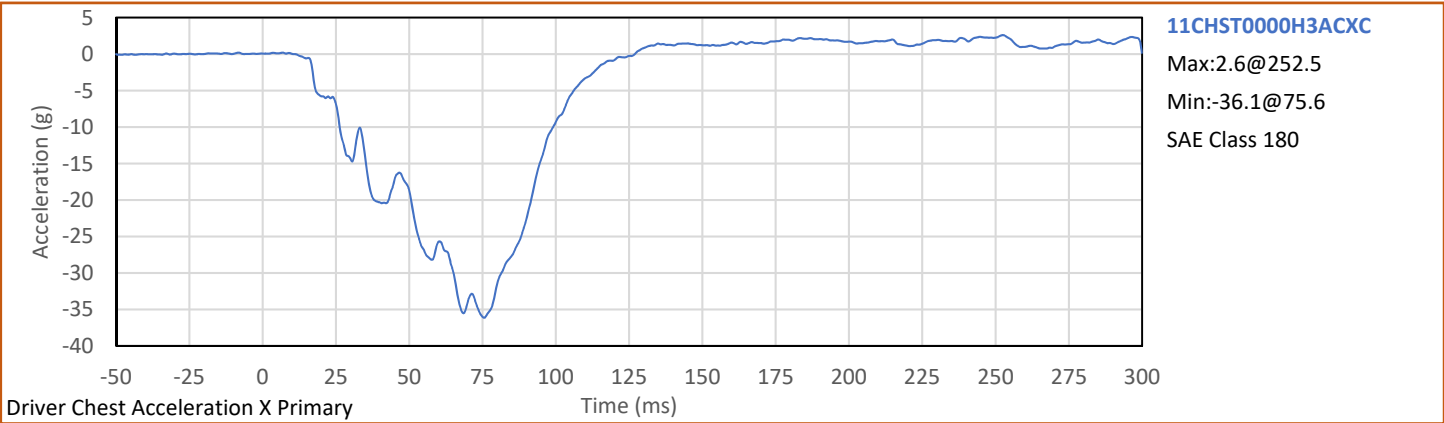

Test Vehicle: 2019 Honda CR-V AWD LX 5-Door MPV
Test Program: 56.3 km/h Frontal Impact NCAP Test


NHTSA No.: M20195300
Test Date: 5/30/2019



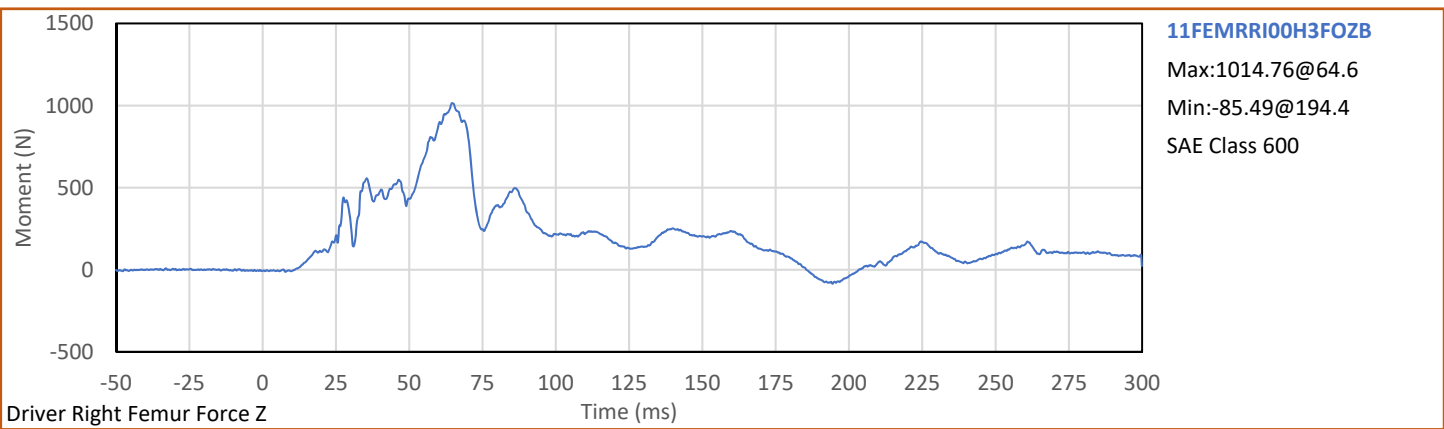
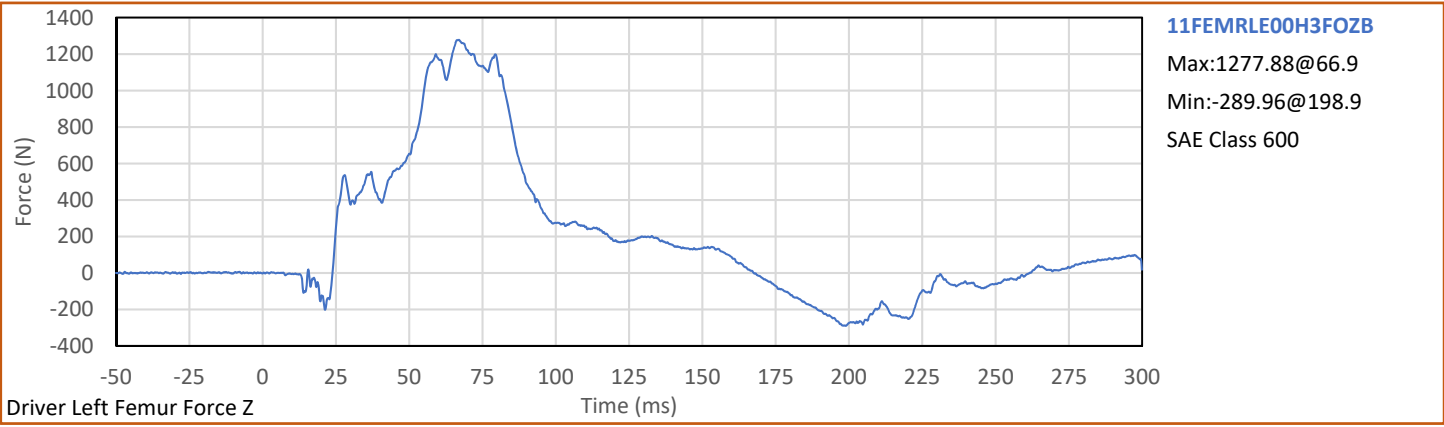



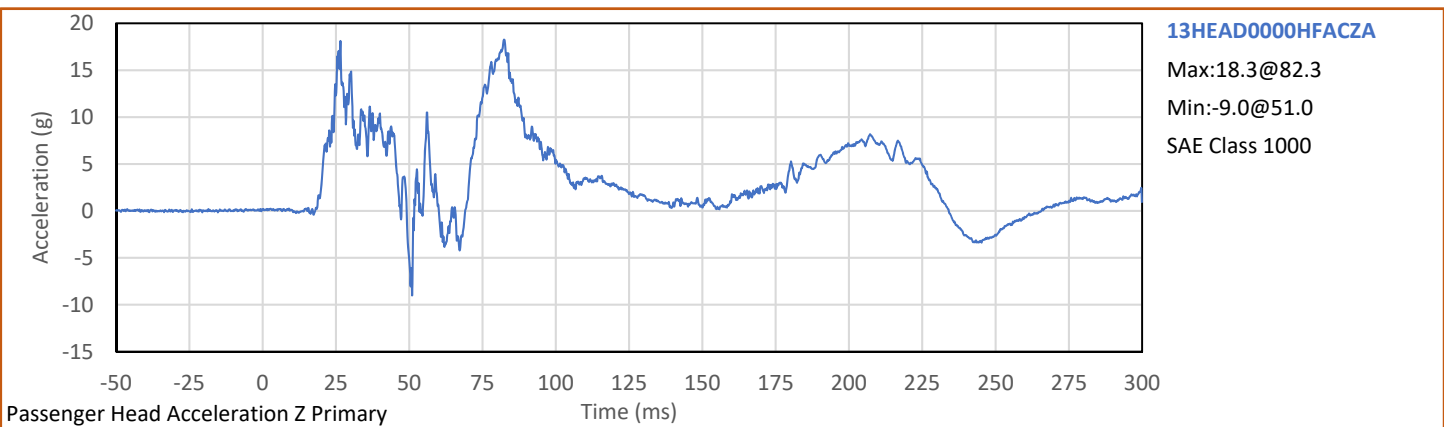
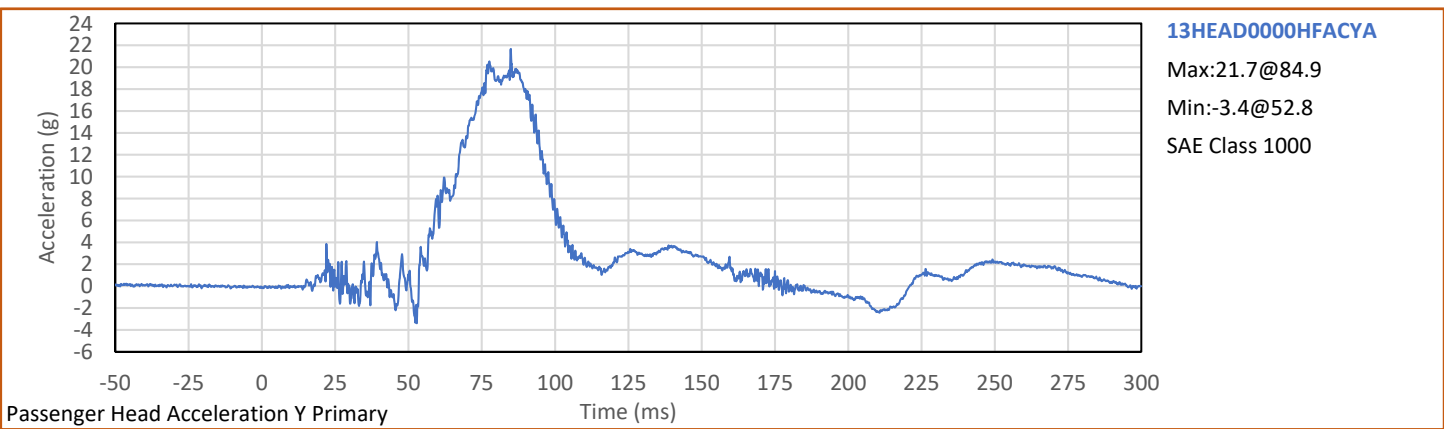
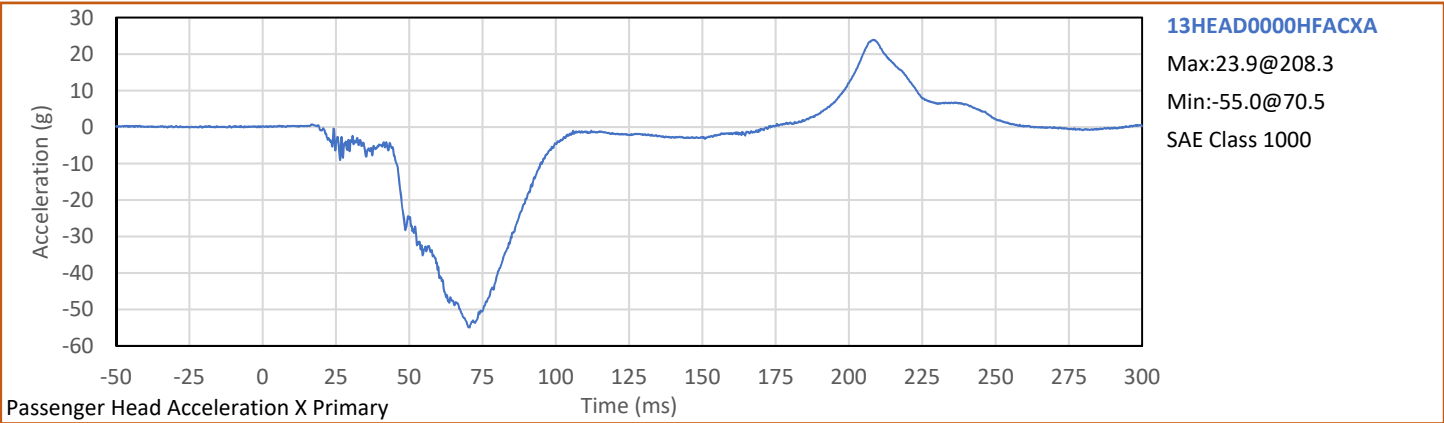


Test Vehicle: 2019 Honda CR-V AWD LX 5-Door MPV
Test Program: 56.3 km/h Frontal Impact NCAP Test

NHTSA No.: M20195300
Test Date: 5/30/2019


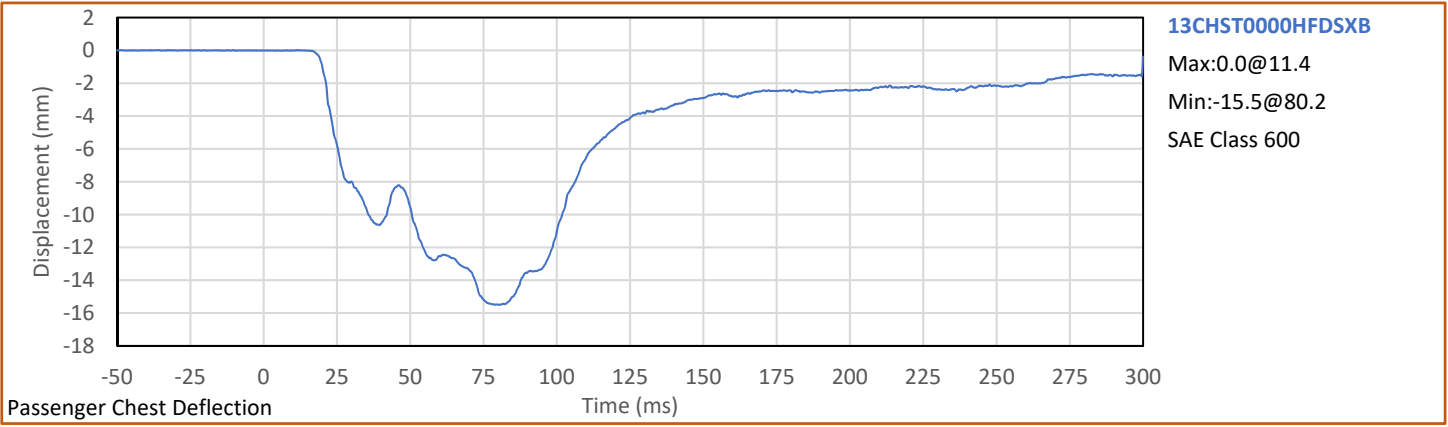


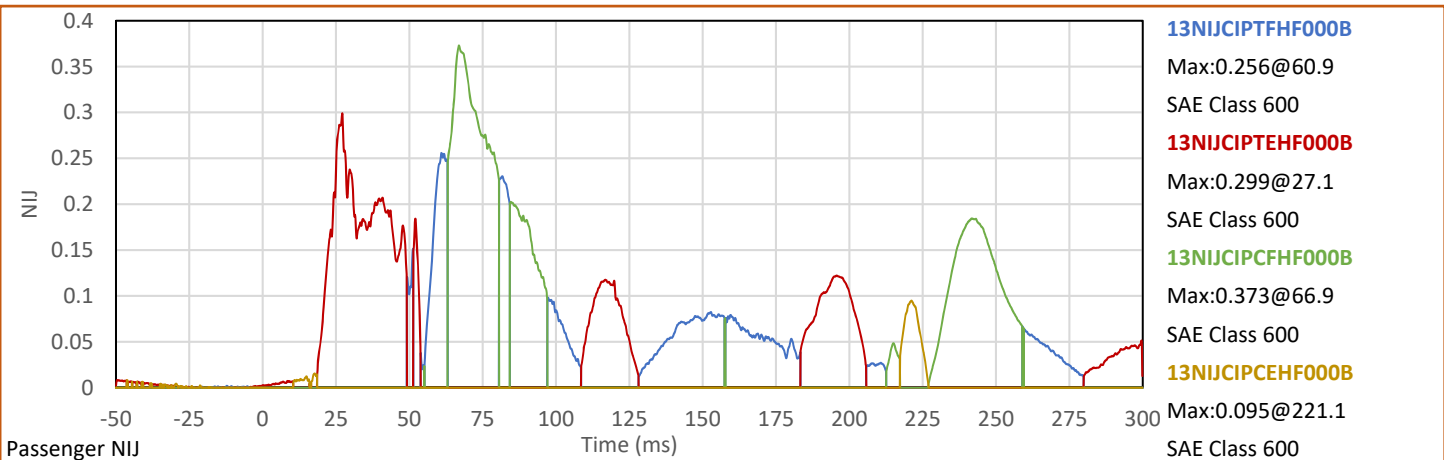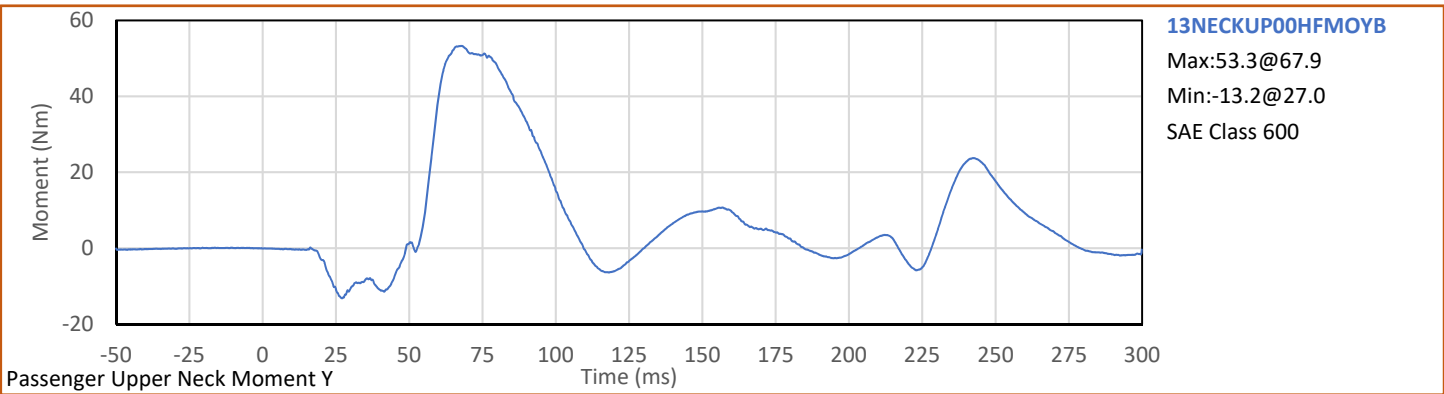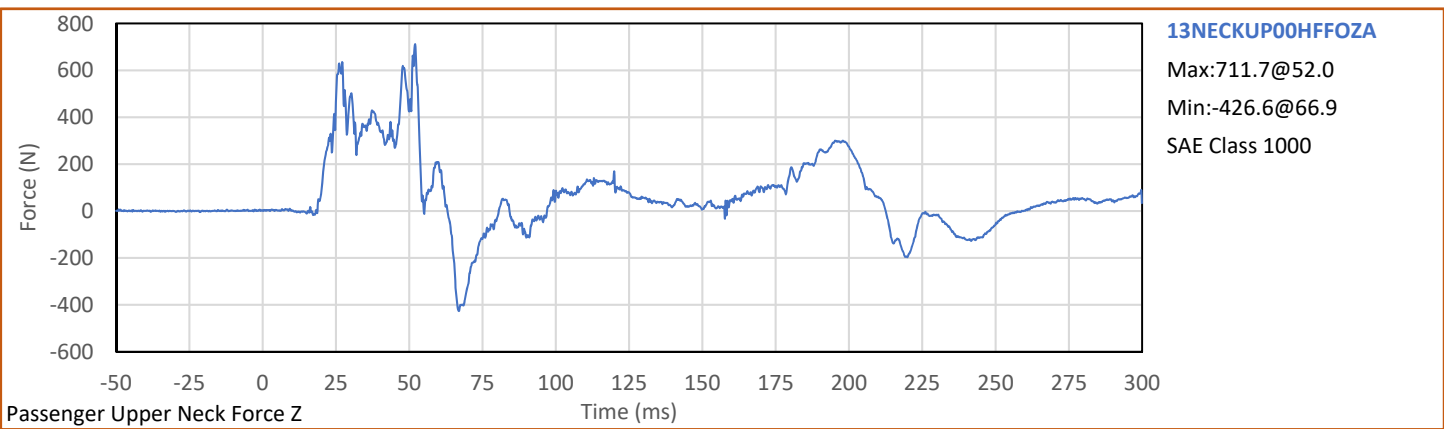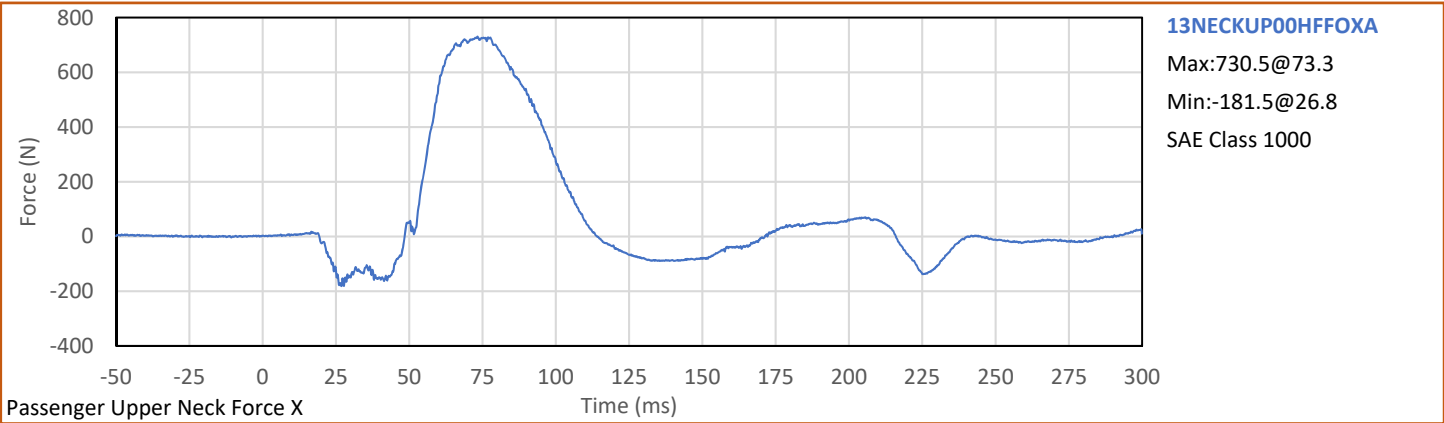

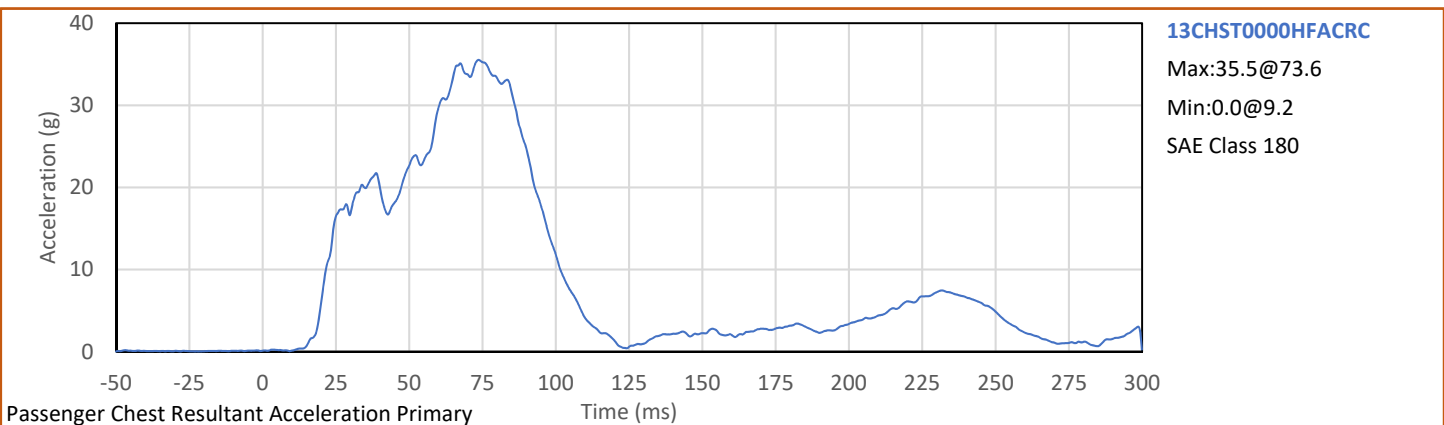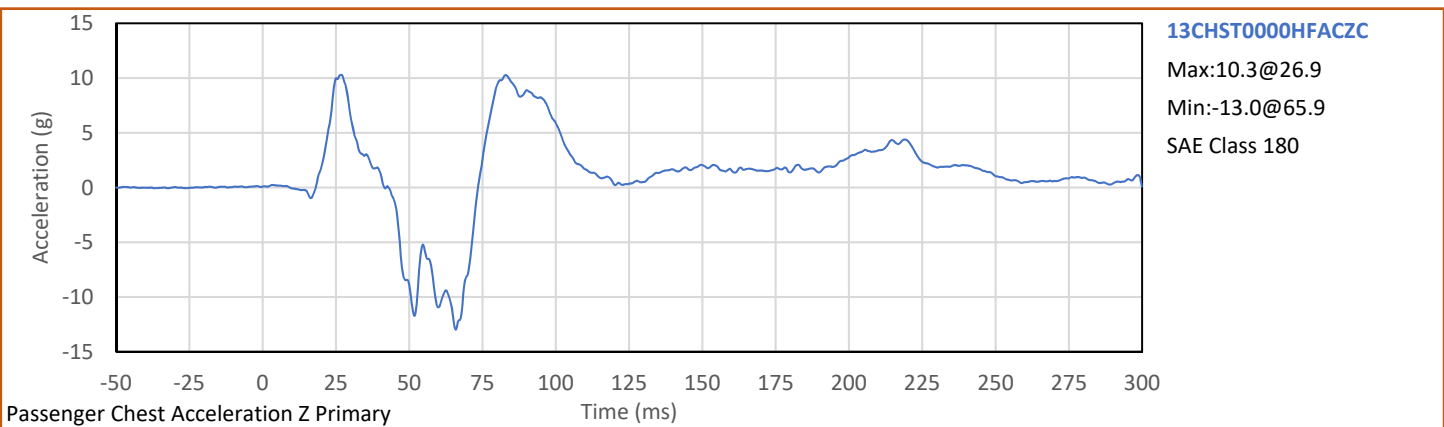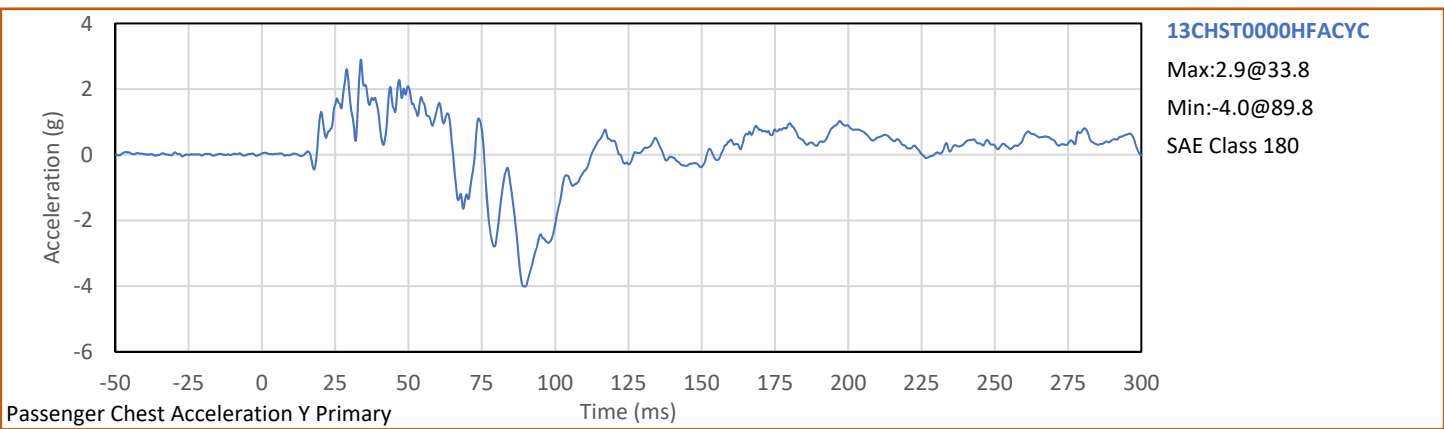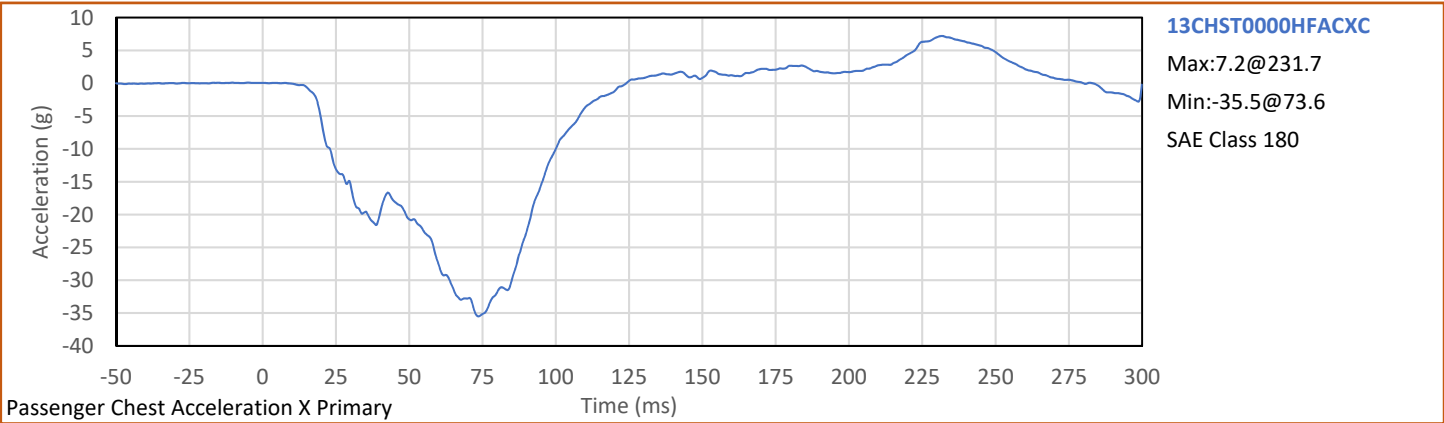

Test Vehicle: 2019 Honda CR-V AWD LX 5-Door MPV
Test Program: 56.3 km/h Frontal Impact NCAP Test

NHTSA No.: M20195300
Test Date: 5/30/2019

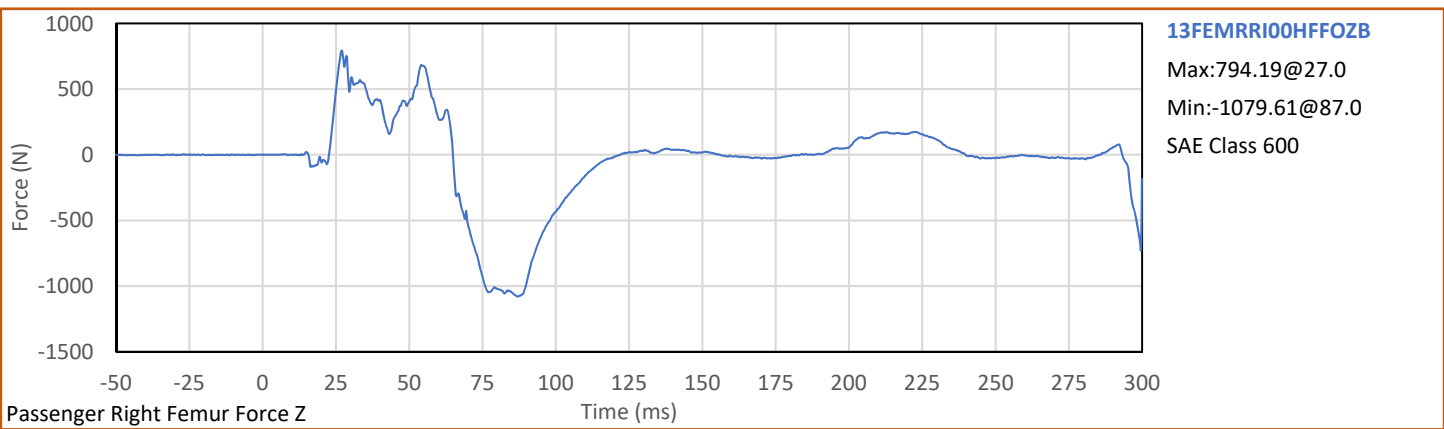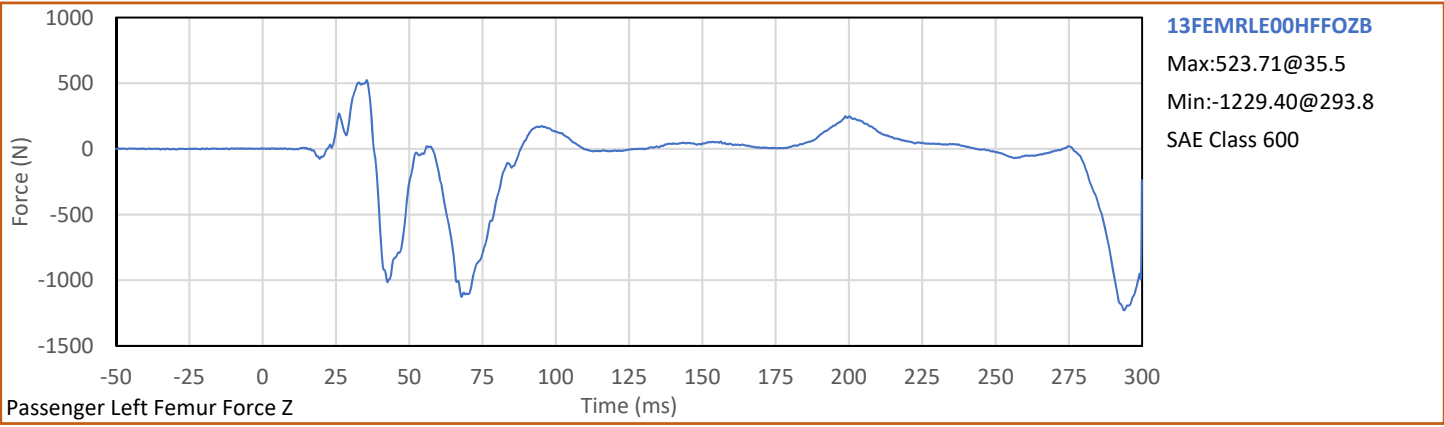

APPENDIX C
ATD CALIBRATION AND PERFORMANCE VERIFICATION DATA

APPENDIX C
Pre-Test ATD Configuration And Performance Verification Data
Hybrid III 50th Percentile Male ATD
S/N: 360


ATD Serial No.: 360


Test Date: 2019-05-21

Dummy Item	Inspect for	Comments	Damage	OK
Entire ATD	Perform general cleaning			✓
Outer Skin	Gashes, rips, cracks			✓
Head	Ballast secure			✓
	General appearance			✓
Neck bracket	Upper neck firmly attached to lower bracket			✓
Neck	Broken or cracked rubber			✓
	Looseness at the condyle joint			✓
Nodding block	Cracked or out of position			✓
Lumbar Spine	Broken or cracked rubber			✓
Ribs	Broken or bent ribs			✓
	Broken or bent rib supports			✓
	Damping material separated or cracked			✓
	Rubber bumpers in place			✓
Chest Displ. Assembly	Bent shaft			✓
	Slider arm riding in track			✓
Sensors	Check cables for cuts, tears			✓
	Check for damaged insulation			✓
Accelerometer Mounting	Head mounting secure			✓
	Chest mounting secure			✓
Knees	Skin condition			✓
	Insert (do not remove)			✓
	Casting			✓
Limbs	Normal movement and adjustment			✓
Knee Sliders	Wires intact			✓
	Rubber returned to "resting" position			✓
Pelvis	Broken			✓
Other	Describe below as needed		x	

Describe any repairs or replacement of parts or other findings:

Other: Left Leg Lower Tibia Force Z, S/N: DI4186, spikes and dropouts in the data. A marginal connection shorting a signal lead to the LEMO case (shield) has been remedied

Technician: 
J. Hernandez

Approved By: 
P. Puzzuto

Tested Parameter	Units	Spec. Low	Spec. High	Result	Pass/Fail
Laboratory Temperature	°C	20.6	22.2	21.4	Pass
Laboratory Relative Humidity	%	10	70	26	Pass
A - Total sitting height	mm	879	889	884	Pass
B - Shoulder pivot height	mm	505	521	518	Pass
C - 'H' point height	mm	84	89	86	Pass
D - 'H' point location from backline	mm	135	140	138	Pass
E - Shoulder pivot from backline	mm	84	94	90	Pass
F - Thigh clearance	mm	140	155	151	Pass
G - Back of elbow to wrist pivot	mm	290	305	299	Pass
H - Head back to backline	mm	41	46	46	Pass
I - Shoulder to elbow length	mm	330	345	339	Pass
J - Elbow rest height	mm	190	211	197	Pass
K - Buttock to knee length	mm	579	604	597	Pass
L - Popliteal length	mm	429	455	447	Pass
M - Knee pivot height	mm	485	500	498	Pass
N - Buttock popliteal length	mm	452	477	469	Pass
O - Chest depth without jacket	mm	213	229	224	Pass
P - Foot length	mm	251	267	261	Pass
V - Shoulder breadth	mm	422	437	430	Pass
W - Foot breadth	mm	91	107	102	Pass
Y - Chest circum. (w/chest jacket)	mm	970	1001	980	Pass
Z - Waist circum.	mm	836	866	844	Pass
AA - Location for chest circum.	mm	429	434	433	Pass
BB - Location for waist circum.	mm	226	231	230	Pass
Overall Test Results					Pass

Technician: _____





J. Hernandez


Approved By: _____




P. Puzzuto



Tested Parameter	Units	Spec. Low	Spec. High	Result	Pass/Fail
Laboratory Temperature	°C	18.9	25.6	21.1	Pass
Laboratory Humidity	%	10	70	22	Pass
Peak Resultant Acceleration	g	225.0	275.0	254.1	Pass
Peak Lateral Acceleration	g	-15.0	15.0	-4.7	Pass
Oscillations After Main Pulse	%	0.0	10.0	2.3	Pass
Is Acceleration Unimodal?	Yes/No	Yes		Yes	Pass
Overall Test Results					Pass

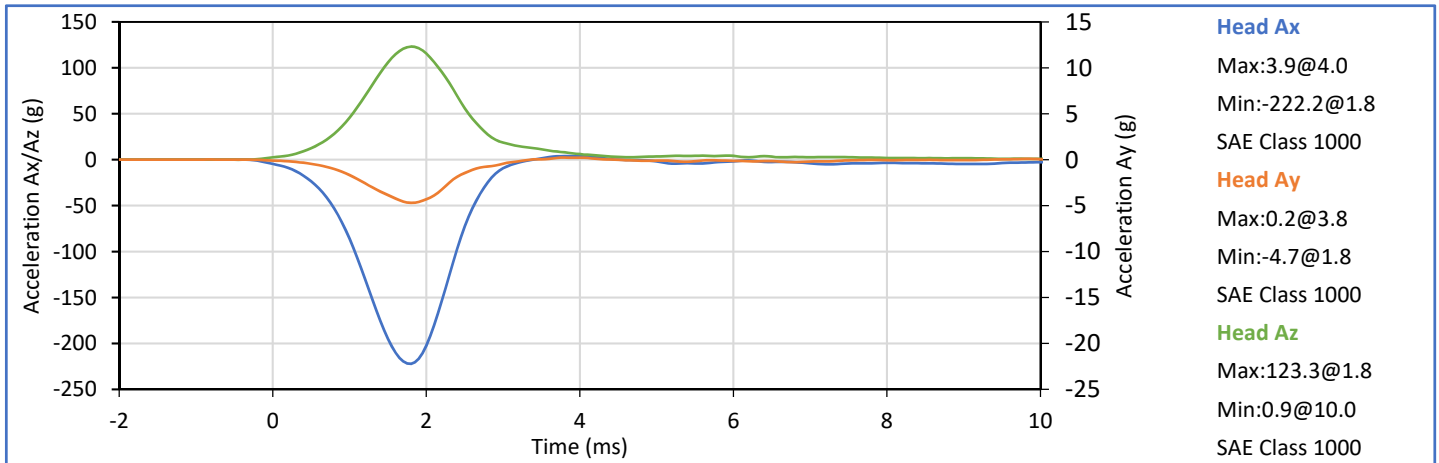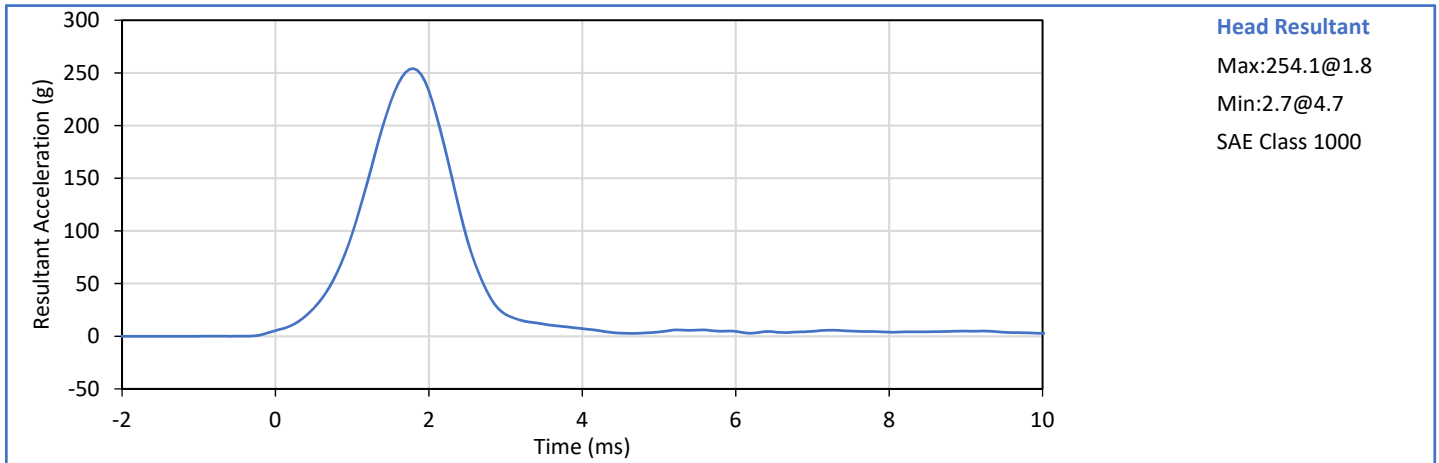



Technician: 
J. Hernandez




Approved By: 
P. Puzzuto

Tested Parameter	Units	Spec. Low	Spec. High	Result	Pass/Fail
Laboratory Temperature	°C	20.6	22.2	21.4	Pass
Laboratory Humidity	%	10	70	22	Pass
Pendulum Velocity	m/s	6.89	7.13	7.00	Pass
Pendulum Deceleration at 10 ms	g	22.5	27.5	26.3	Pass
Pendulum Deceleration at 20 ms	g	17.6	22.6	20.4	Pass
Pendulum Deceleration at 30 ms	g	12.5	18.5	16.8	Pass
Peak Pendulum Decel. after 30 ms	g	0.0	29.0	16.8	Pass
Deceleration Decay to Cross 5 g	ms	34.0	42.0	37.1	Pass
"D" Plane Rotation peak	deg	64.0	78.0	75.2	Pass
	ms	57.0	64.0	59.4	Pass
"D" Plane Rotation Decay To Zero	ms	113.0	128.0	119.8	Pass
Moment About Occipital Condyle	Nm	88.1	108.5	96.1	Pass
	ms	47.0	58.0	50.0	Pass
Moment Decay, Peak to Zero	ms	97.0	107.0	97.8	Pass
Overall Test Results					Pass

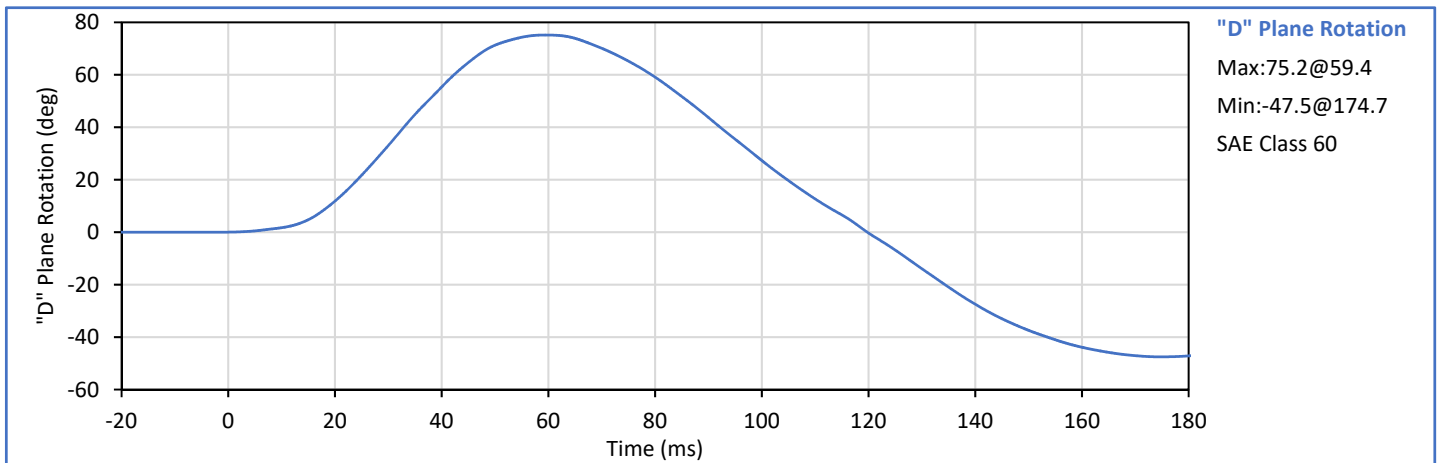
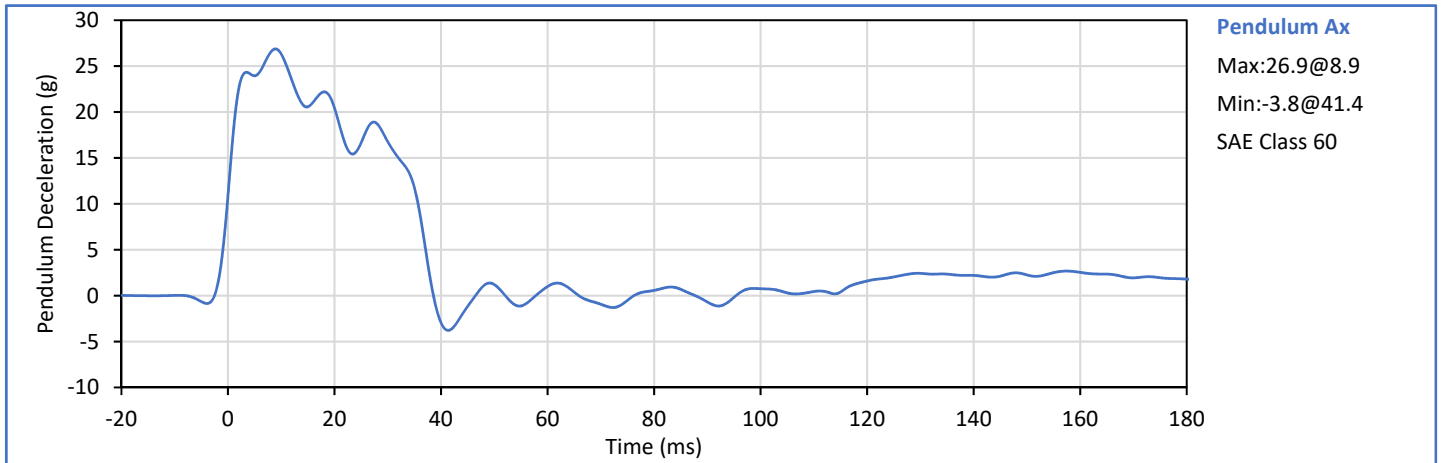



Technician: 
J. Hernandez


Approved By: 
P. Puzzuto

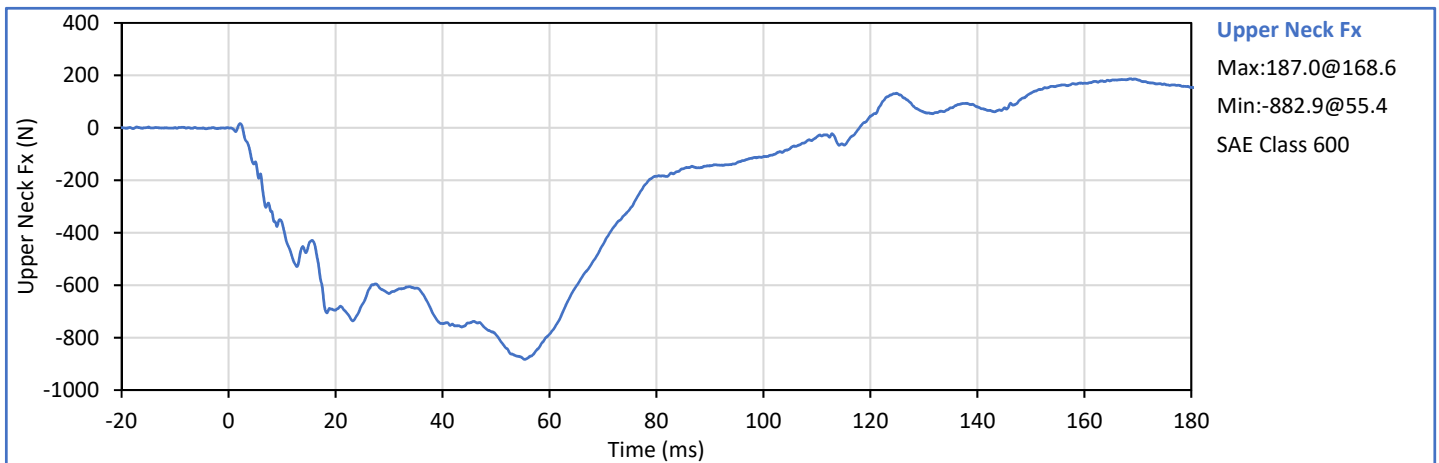
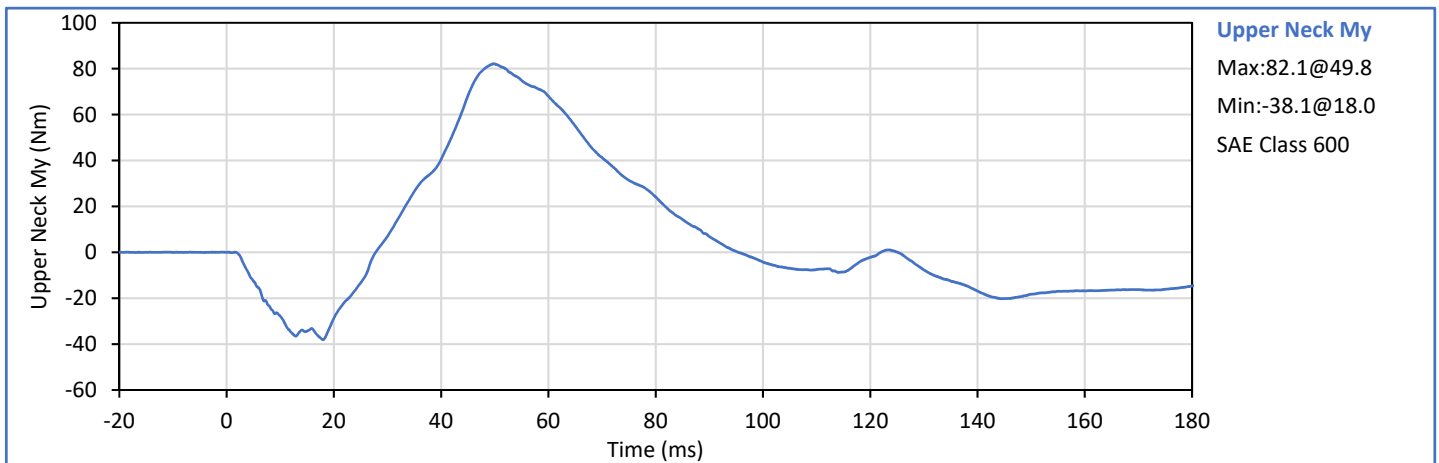
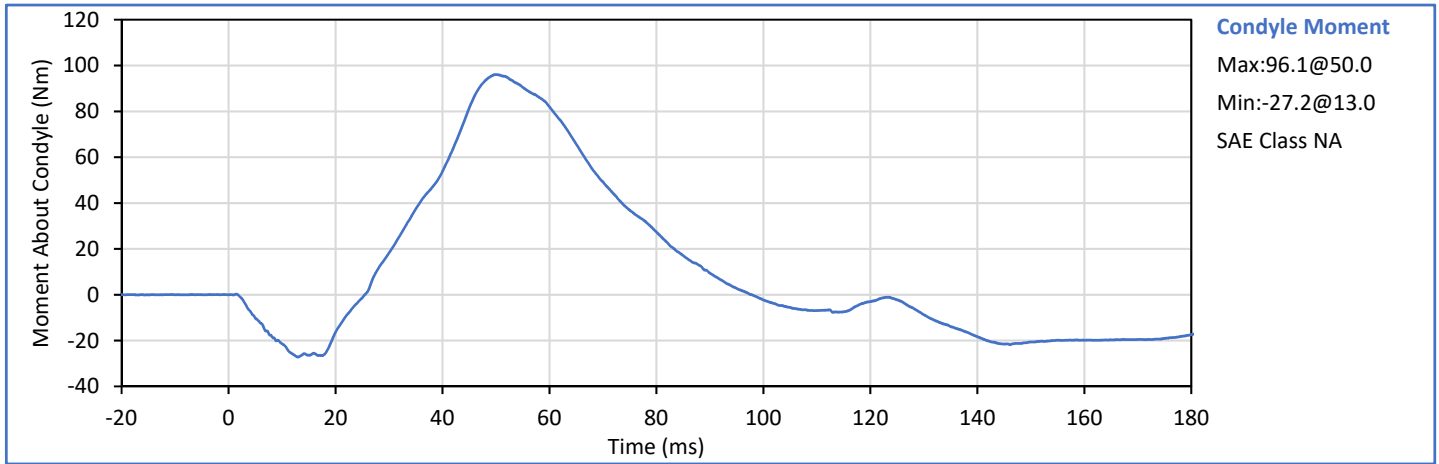


Tested Parameter	Units	Spec. Low	Spec. High	Result	Pass/Fail
Laboratory Temperature	°C	20.6	22.2	21.4	Pass
Laboratory Humidity	%	10	70	22	Pass
Pendulum Velocity	m/s	5.94	6.19	5.99	Pass
Pendulum Deceleration at 10 ms	g	17.2	21.2	21.1	Pass
Pendulum Deceleration at 20 ms	g	14.0	19.0	18.1	Pass
Pendulum Deceleration at 30 ms	g	11.0	16.0	12.3	Pass
Peak Pendulum Decel. after 30 ms	g	0.0	22.0	13.0	Pass
Deceleration Decay to Cross 5 g	ms	38.0	46.0	40.6	Pass
"D" Plane Rotation peak	deg	81.0	106.0	99.2	Pass
	ms	72.0	82.0	73.4	Pass
"D" Plane Rotation Decay To Zero	ms	147.0	174.0	153.0	Pass
Moment About Occipital Condyle	Nm	-79.9	-52.9	-76.2	Pass
	ms	65.0	79.0	66.8	Pass
Moment Decay, Peak to Zero	ms	120.0	148.0	133.6	Pass
Overall Test Results					Pass

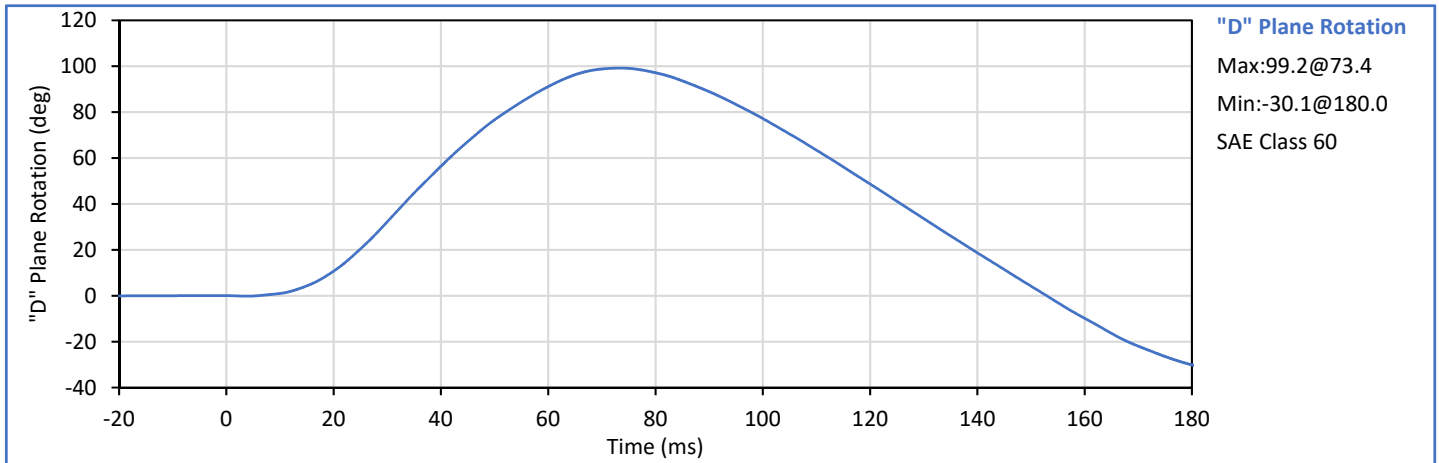
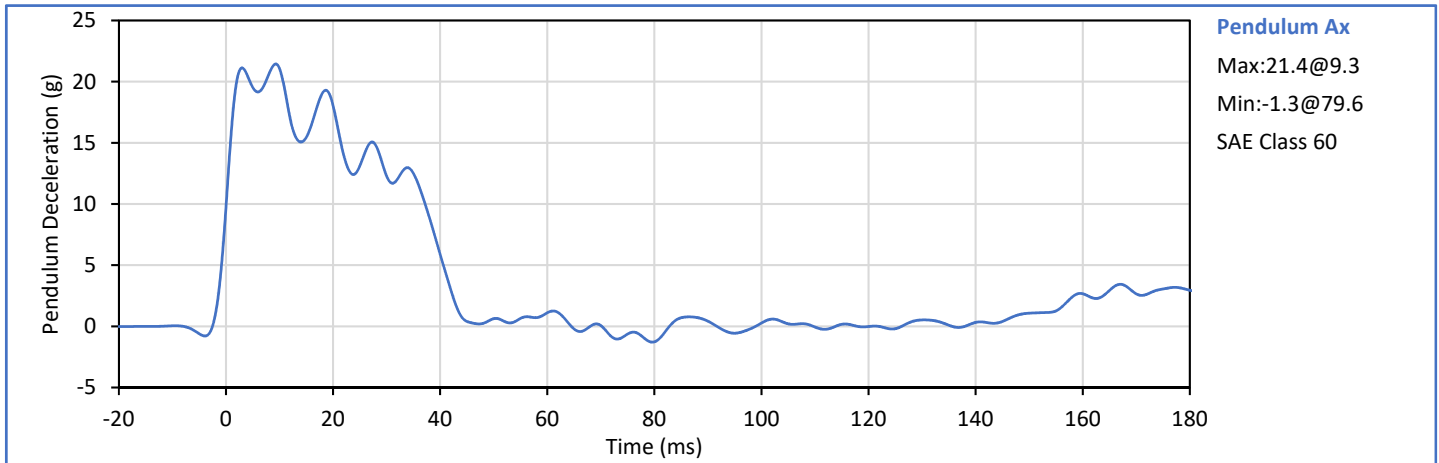



Technician: 
J. Hernandez


Approved By: 
P. Puzzuto

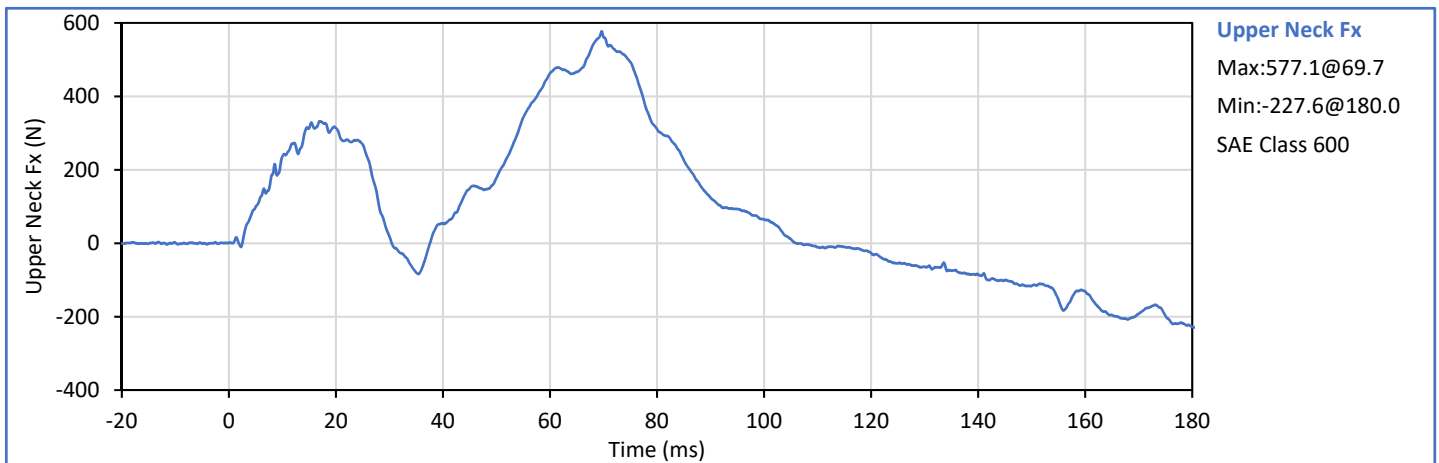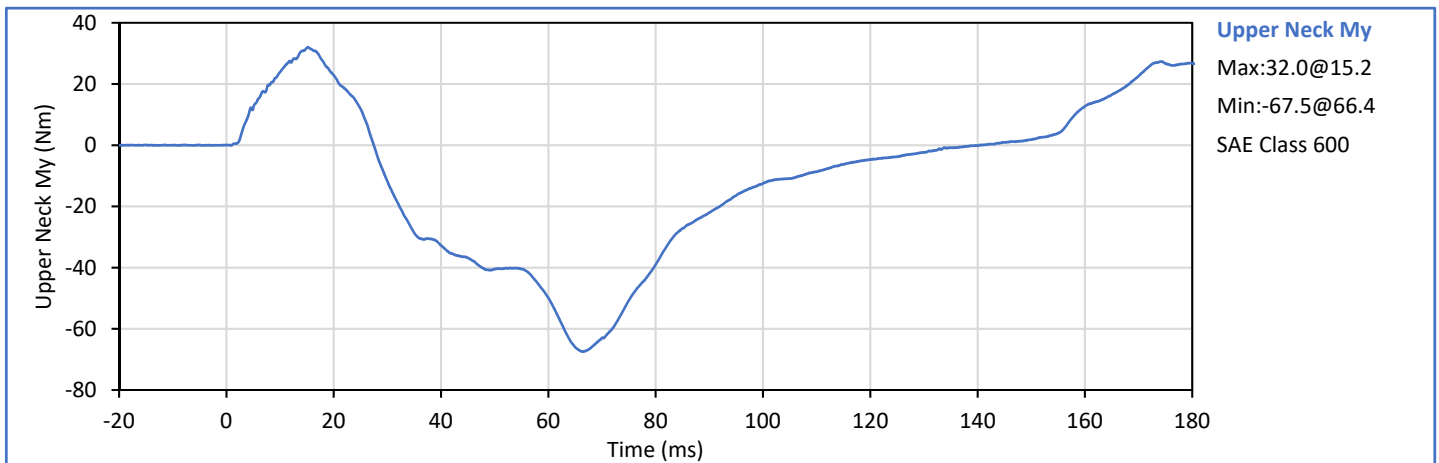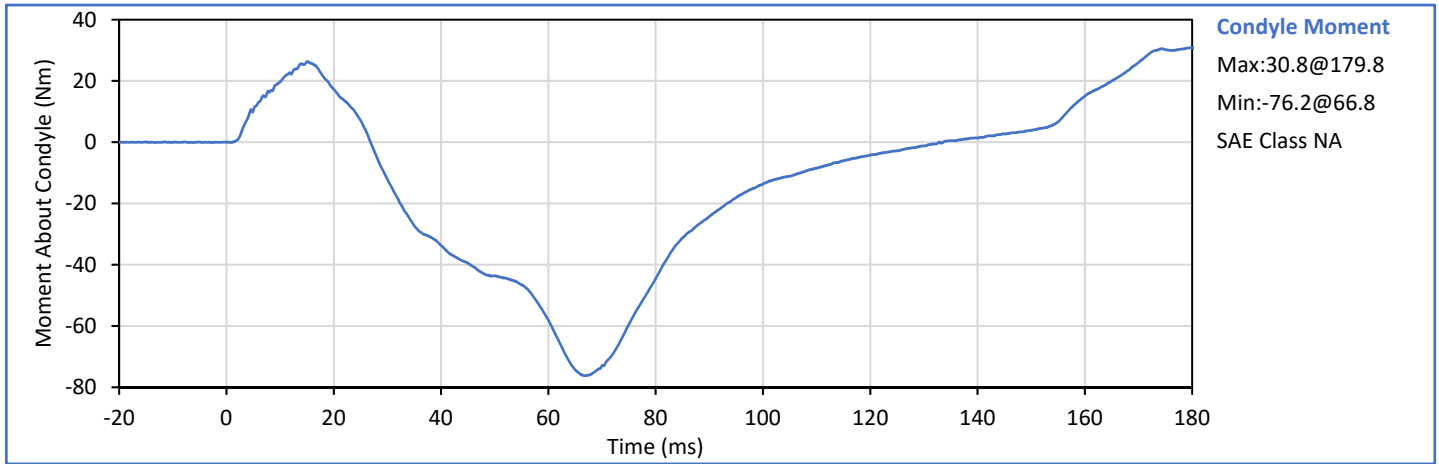



Tested Parameter	Units	Spec. Low	Spec. High	Result	Pass/Fail
Laboratory Temperature	°C	20.6	22.2	21.4	Pass
Laboratory Humidity	%	10	70	26	Pass
Probe Velocity	m/s	6.58	6.82	6.77	Pass
Peak Chest Deflection	cm	6.35	7.26	7.01	Pass
Peak Probe Force	kN	5.159	5.893	5.658	Pass
Internal Hysteresis	%	69.0	85.0	71.5	Pass
Overall Test Results					Pass

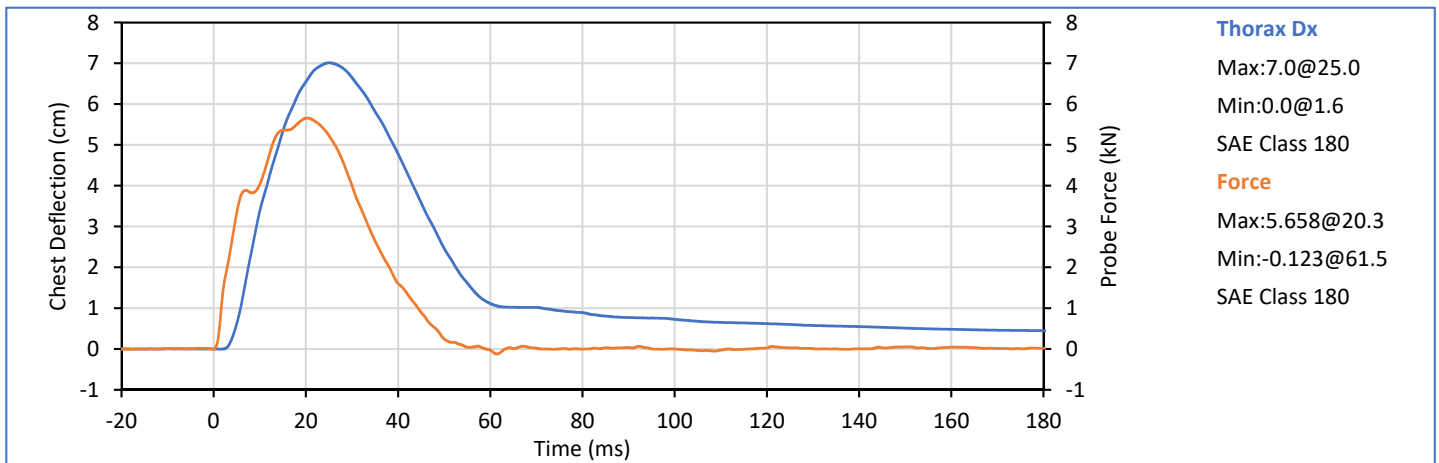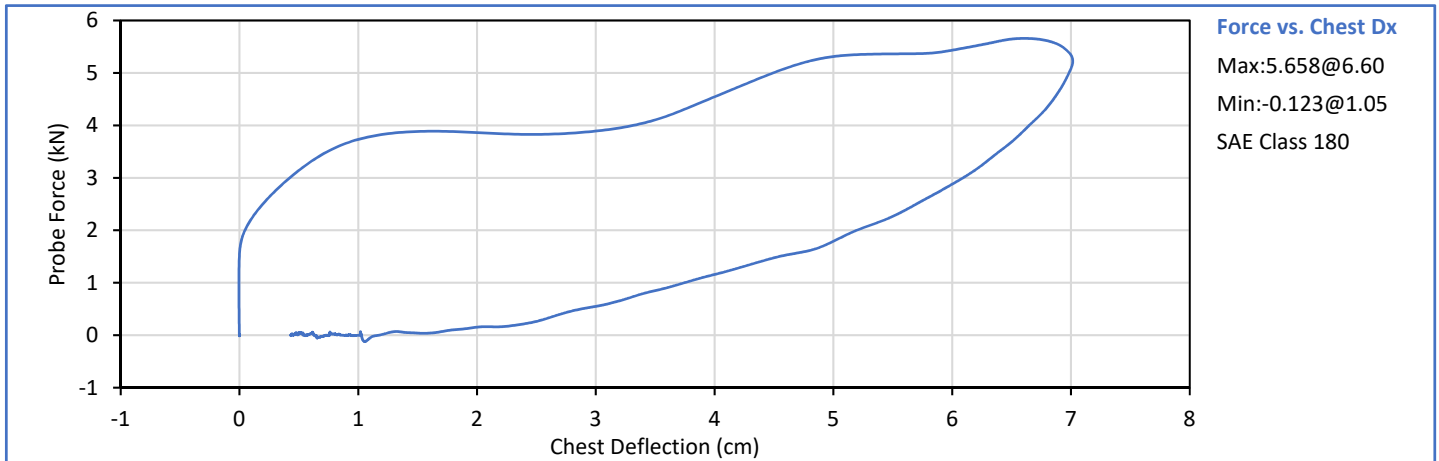



Technician: 
 J. Hernandez

Approved By: 
 P. Puzzuto



	Tested Parameter	Units	Spec. Low	Spec. High	Result	Pass/Fail
	Laboratory Temperature	°C	18.9	25.6	21.1	Pass
	Laboratory Humidity	%	10	70	28	Pass
Left Hip	Left Hip Rotation Rate	deg/s	5.0	10.0	5.7	Pass
	Left Femur Torque at 30°	Nm	0.0	95.0	68.7	Pass
	Left Hip Rotation at 203 Nm	deg	40.0	50.0	45.0	Pass
Right Hip	Right Hip Rotation Rate	deg/s	5.0	10.0	5.7	Pass
	Right Femur Torque at 30°	Nm	0.0	95.0	66.0	Pass
	Right Hip Rotation at 203 Nm	deg	40.0	50.0	46.2	Pass
Overall Test Results						Pass

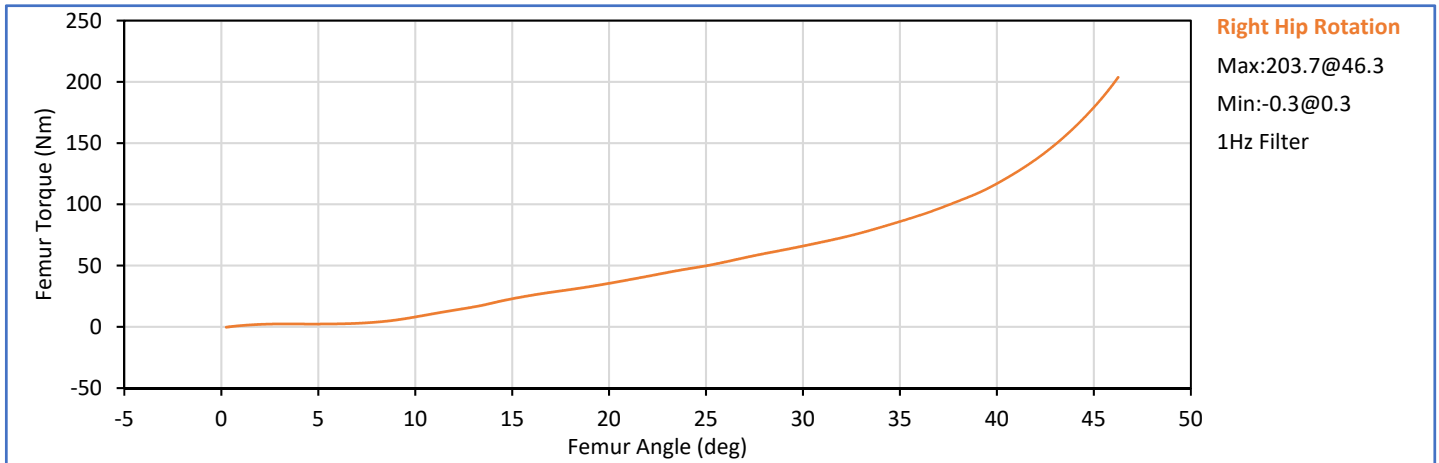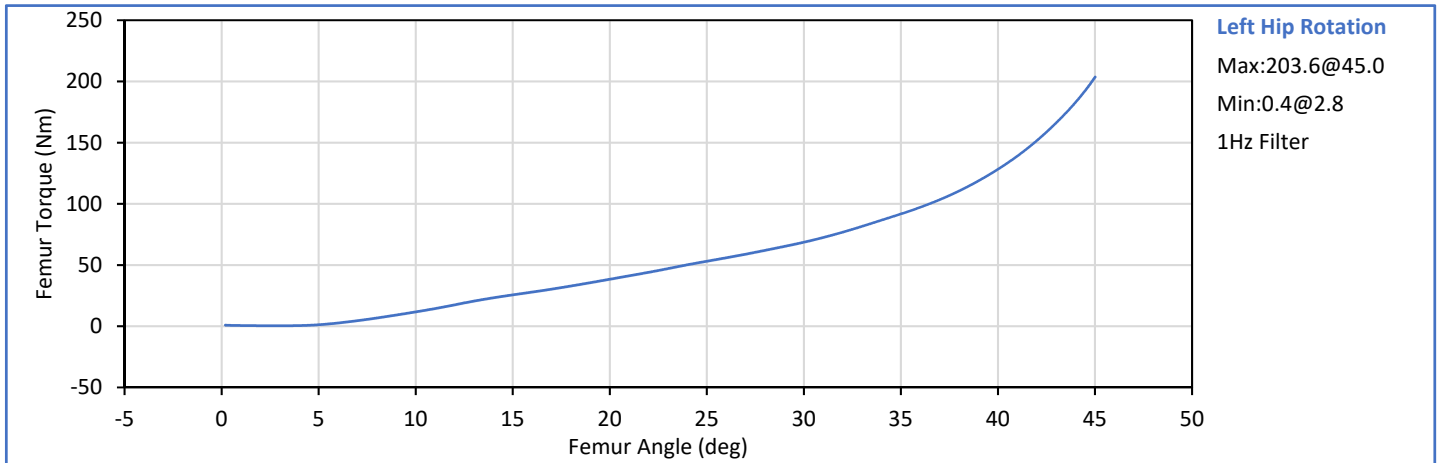



Technician: 
J. Hernandez

Approved By: 
P. Puzzuto

	Tested Parameter	Units	Spec. Low	Spec. High	Result	Pass/Fail
	Laboratory Temperature	°C	18.9	25.6	21.2	Pass
	Laboratory Humidity	%	10	70	25	Pass
Left	Probe Velocity	m/s	2.070	2.130	2.109	Pass
Knee	Peak Resistive Force	N	4715	5782	5669	Pass
Right	Probe Velocity	m/s	2.070	2.130	2.128	Pass
Knee	Peak Resistive Force	N	4715	5782	5517	Pass
Overall Test Results						Pass

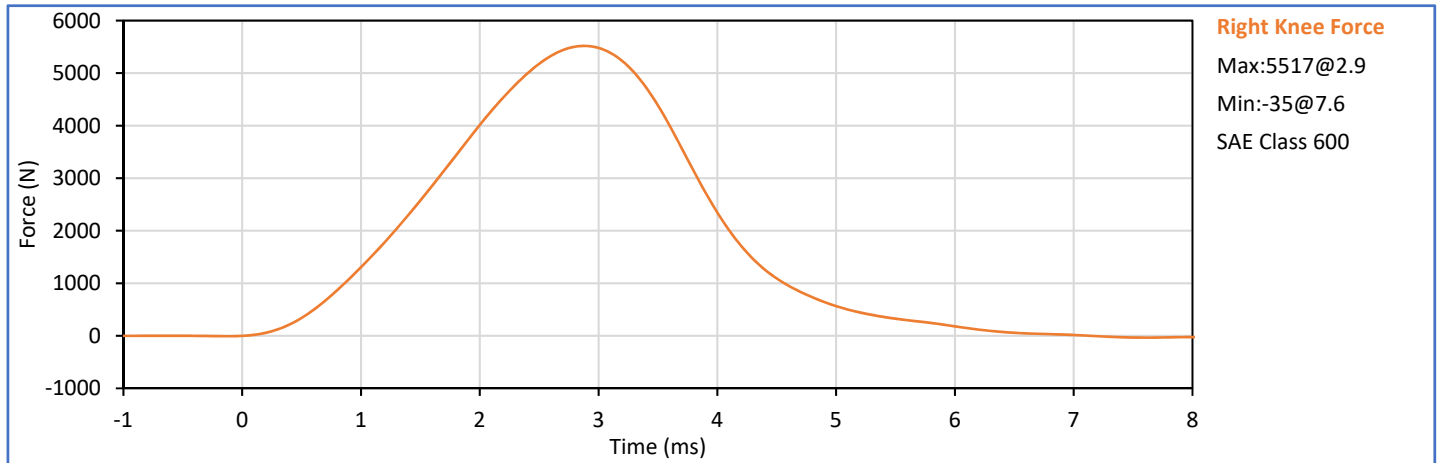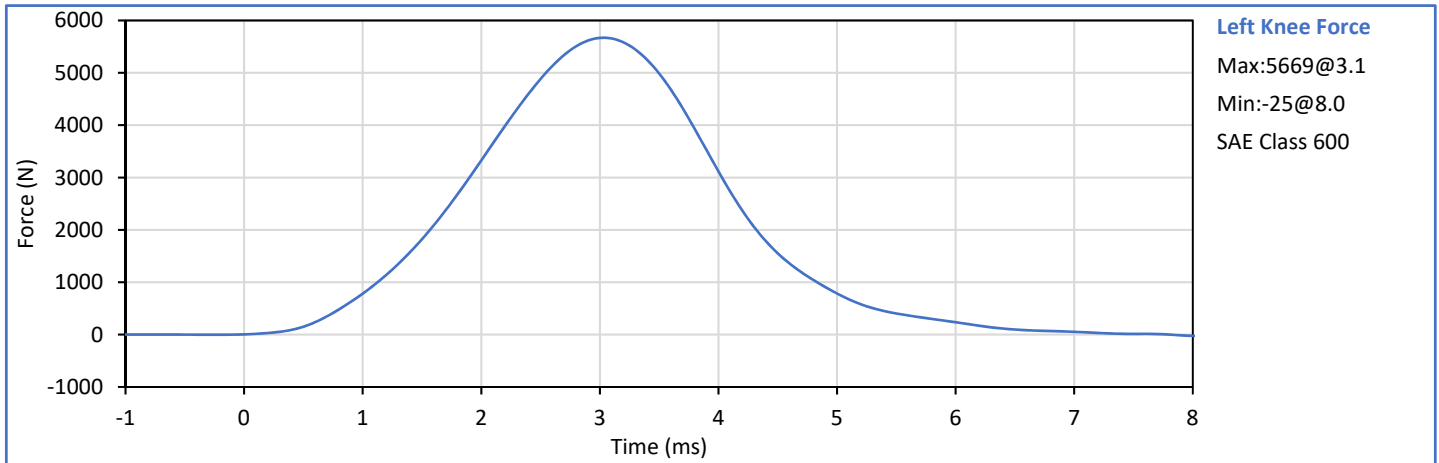

Technician: 
J. Hernandez

Approved By: 
P. Puzzuto

APPENDIX C
Pre-Test ATD Configuration And Performance Verification Data
Hybrid III 5th Percentile Female ATD
S/N: 630

Dummy Item	Inspect for	Comments	Damage	Okay
Entire ATD	Perform general cleaning			✓
Outer Skin	Gashes, rips, cracks			✓
Head	Ballast secure			✓
	General appearance			✓
Neck bracket	Upper neck firmly attached to lower bracket			✓
Neck	Broken or cracked rubber			✓
	Looseness at the condyle joint			✓
Nodding block	Cracked or out of position			✓
Lumbar Spine	Broken or cracked rubber			✓
Ribs	Broken or bent ribs			✓
	Broken or bent rib supports			✓
	Damping material separated or cracked			✓
	Rubber bumpers in place			✓
Chest Displ. Assembly	Bent shaft			✓
	Slider arm riding in track			✓
Sensors	Check cables for cuts, tears			✓
	Check for damaged insulation			✓
Accelerometer Mounting	Head mounting secure			✓
	Chest mounting secure			✓
Knees	Skin condition			✓
	Insert (do not remove)			✓
	Casting			✓
Limbs	Normal movement and adjustment			✓
Knee Sliders	Wires intact			✓
	Rubber returned to "resting" position			✓
Pelvis	Broken			✓
Other	Describe below as needed			✓

Describe any repairs or replacement of parts or other findings:

No Problems Found

Technician: _____

J. Hernandez

Approved By: _____

P. Puzzuto

Tested Parameter	Units	Spec. Low	Spec. High	Result	Pass/Fail
Laboratory Temperature	°C	20.6	22.2	21.1	Pass
Laboratory Relative Humidity	%	10	70	22	Pass
A - Total sitting height	mm	775	800	790	Pass
B - Shoulder pivot height	mm	432	457	443	Pass
C - 'H' point height	mm	81	86	86	Pass
D - 'H' point location from backline	mm	145	150	147	Pass
E - Shoulder pivot from backline	mm	69	84	79	Pass
F - Thigh clearance	mm	119	135	128	Pass
G - Back of elbow to wrist pivot	mm	244	259	254	Pass
H - Head back to backline	mm	41	46	43	Pass
I - Shoulder to elbow length	mm	277	297	292	Pass
J - Elbow rest height	mm	183	203	192	Pass
K - Buttock to knee length	mm	521	546	531	Pass
L - Popliteal length	mm	356	376	370	Pass
M - Knee pivot height	mm	394	419	406	Pass
N - Buttock popliteal length	mm	414	439	429	Pass
O - Chest depth without jacket	mm	175	191	187	Pass
P - Foot length	mm	219	234	230	Pass
R - Buttock to Knee Pivot Length	mm	457	483	478	Pass
S - Head Breadth	mm	137	147	143	Pass
T - Head Depth	mm	178	188	183	Pass
U - Hip Breadth	mm	300	315	305	Pass
V - Shoulder breadth	mm	351	366	358	Pass
W - Foot breadth	mm	79	94	90	Pass
X - Head circum.	mm	528	549	541	Pass
Y - Chest circum. (w/chest jacket)	mm	851	881	870	Pass
Z - Waist circum.	mm	760	790	776	Pass
AA - Location for chest circum.	mm	333	358	338	Pass
BB - Location for waist circum.	mm	160	170	167	Pass
Overall Test Results					Pass

Technician:





J. Hernandez


Approved By:




P. Puzzuto



Tested Parameter	Units	Spec. Low	Spec. High	Result	Pass/Fail
Laboratory Temperature	°C	18.9	25.6	21.4	Pass
Laboratory Humidity	%	10	70	26	Pass
Peak Resultant Acceleration	g	250.0	300.0	276.6	Pass
Peak Lateral Acceleration	g	-15.0	15.0	3.2	Pass
Oscillations After Main Pulse	%	0.0	10.0	2.0	Pass
Is Acceleration Unimodal?	Yes/No	Yes		Yes	Pass
Overall Test Results					Pass

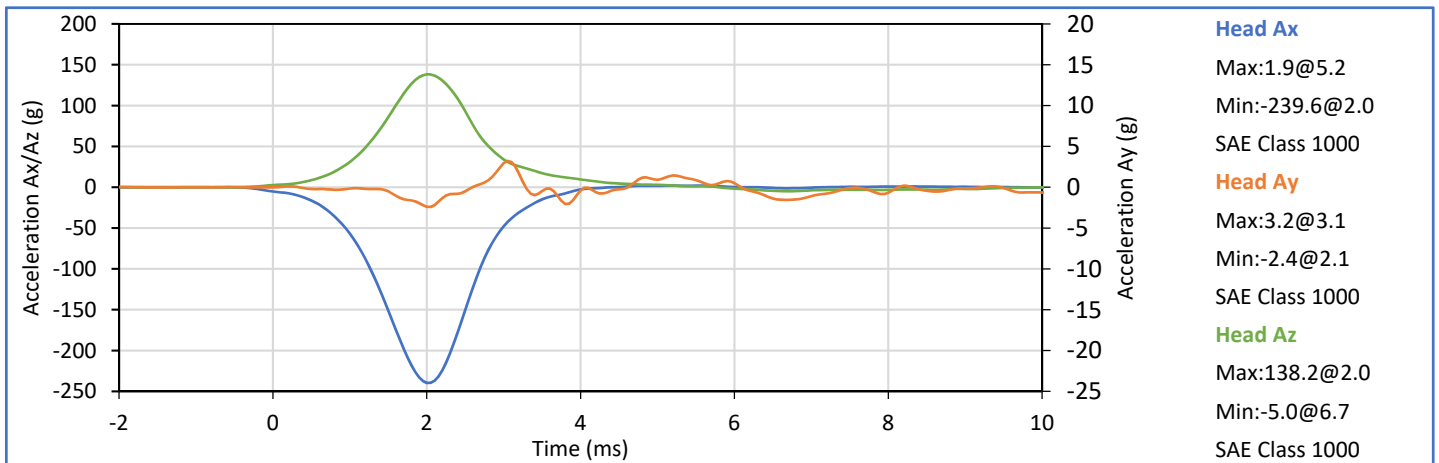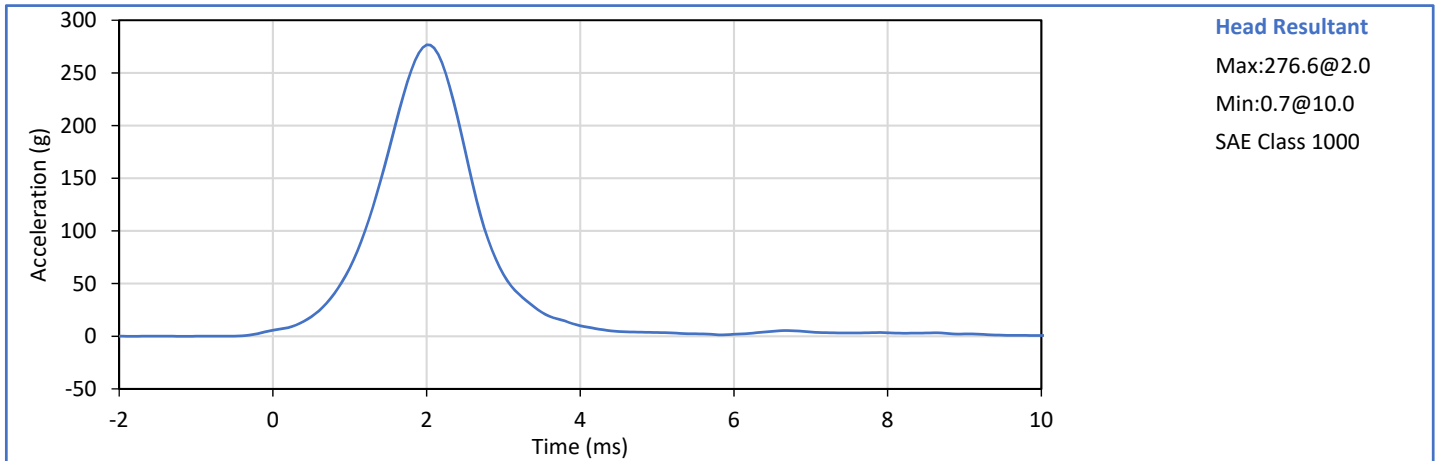



Technician: 
J. Hernandez




Approved By: 
P. Puzzuto

Tested Parameter	Units	Spec. Low	Spec. High	Result	Pass/Fail
Laboratory Temperature	°C	20.6	22.2	21.4	Pass
Laboratory Humidity	%	10	70	22	Pass
Pendulum Velocity	m/s	6.89	7.13	6.90	Pass
Pendulum Velocity at 10 ms	m/s	2.10	2.50	2.48	Pass
Pendulum Velocity at 20 ms	m/s	4.00	5.00	4.71	Pass
Pendulum Velocity at 30 ms	m/s	5.80	7.00	6.57	Pass
Peak "D" Plane Rotation	deg	77.0	91.0	81.9	Pass
Peak Moment in Rotation	Nm	69.0	83.0	79.5	Pass
Positive Moment Decay to 10 Nm	ms	80.0	100.0	83.6	Pass
Overall Test Results					Pass

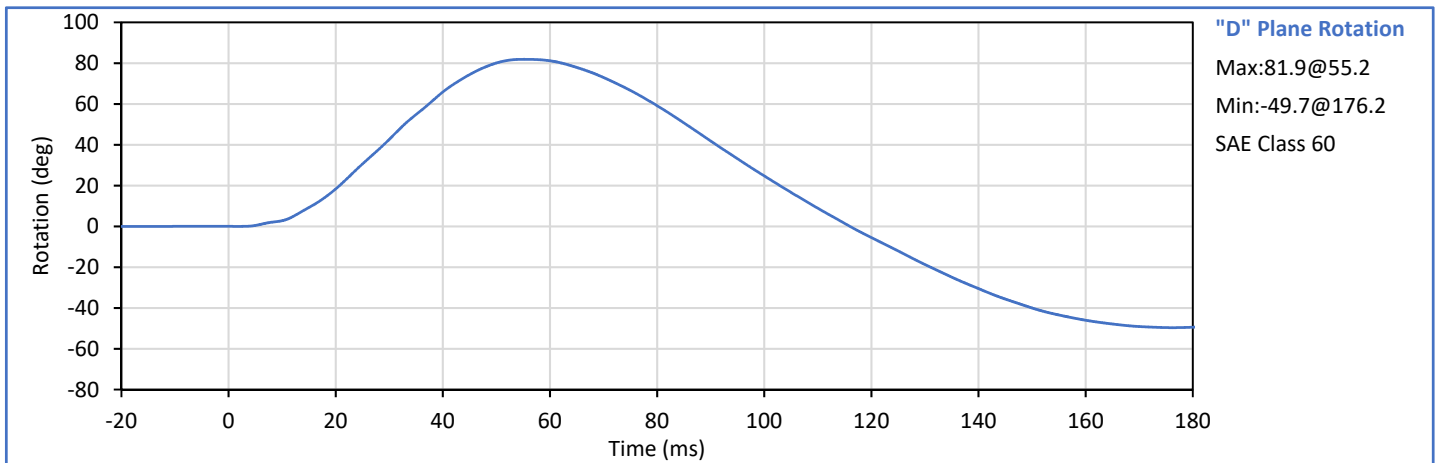
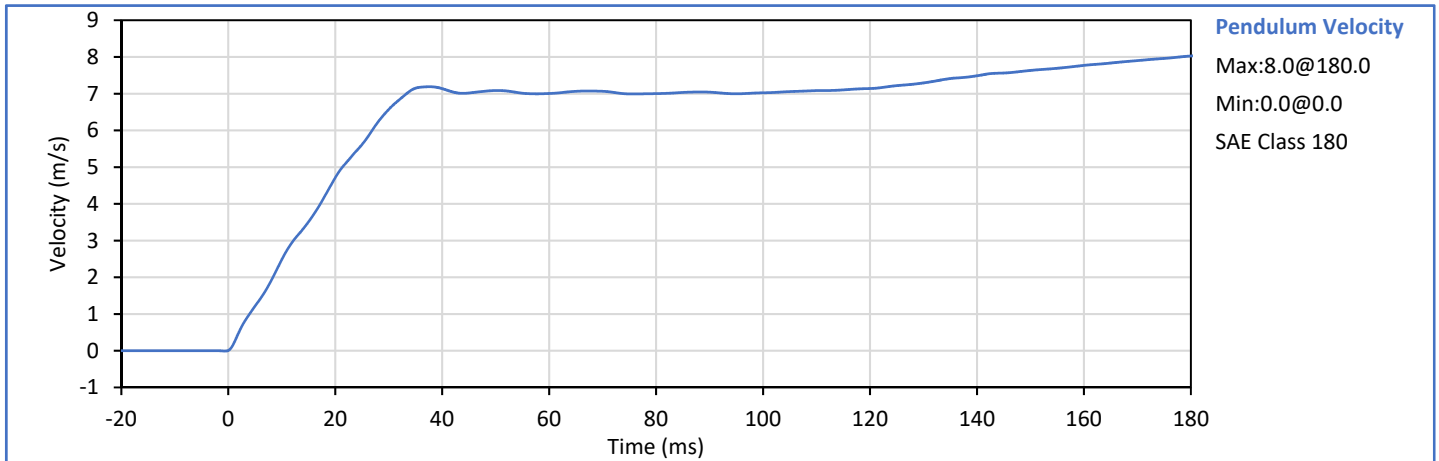



Technician: 
J. Hernandez


Approved By: 
P. Puzzuto

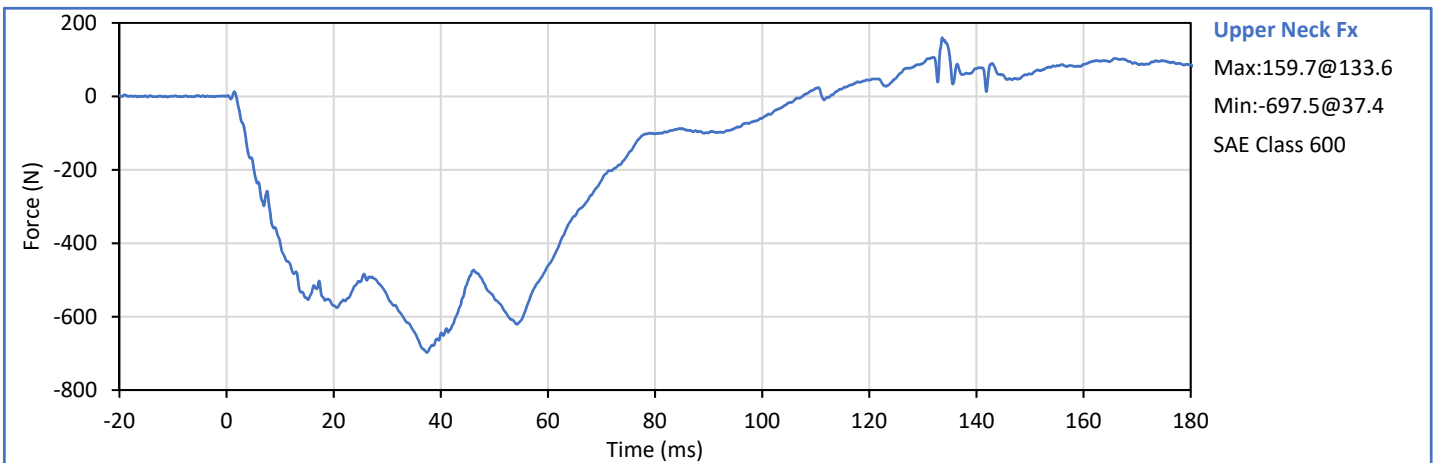
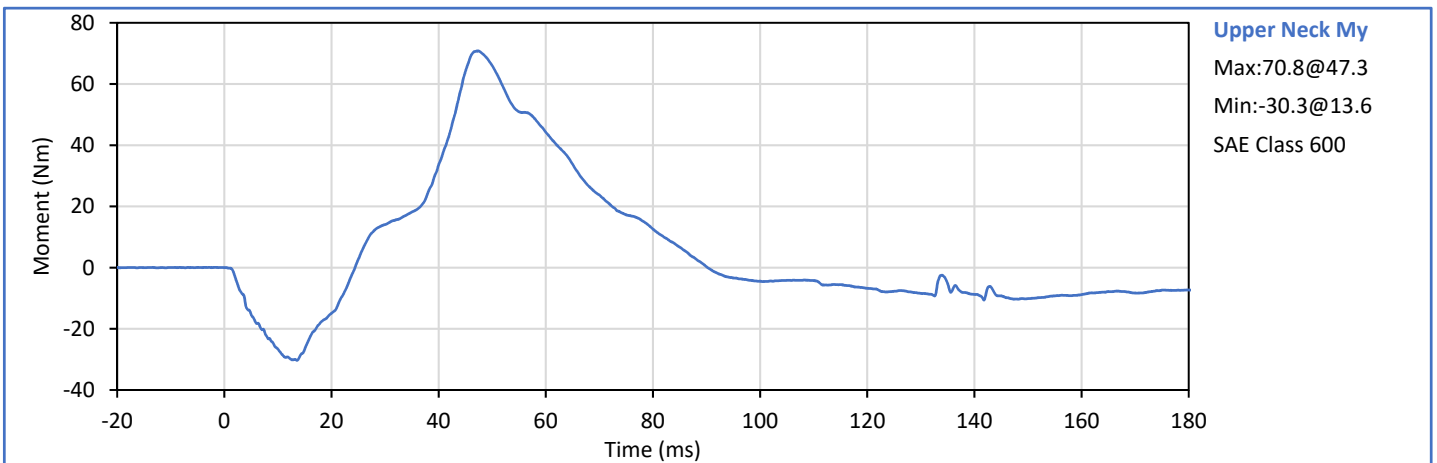
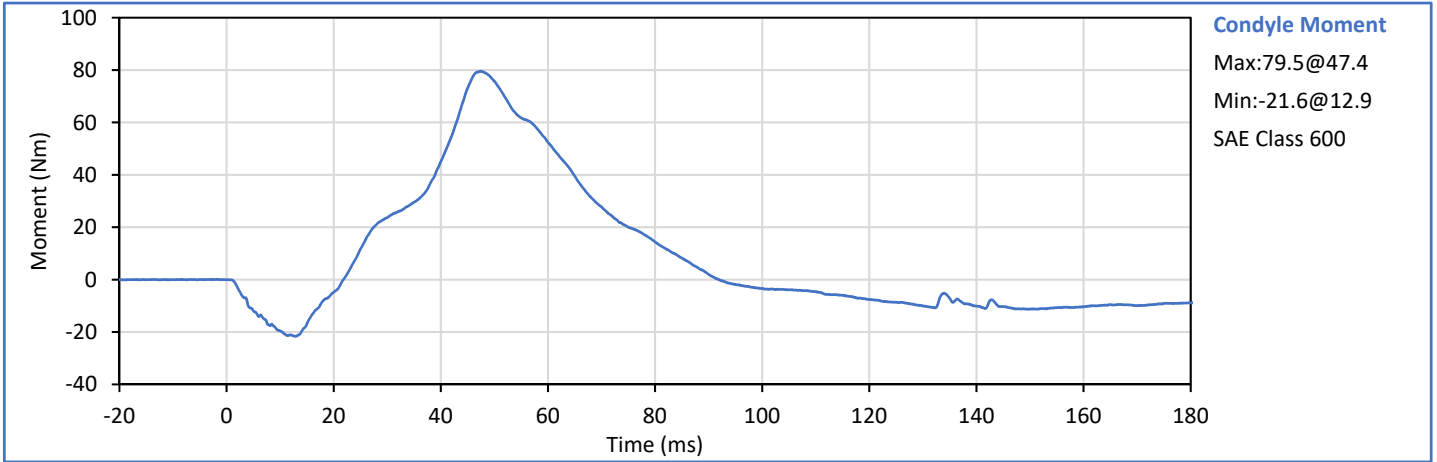


Tested Parameter	Units	Spec. Low	Spec. High	Result	Pass/Fail
Laboratory Temperature	°C	20.6	22.2	21.4	Pass
Laboratory Humidity	%	10	70	22	Pass
Pendulum Velocity	m/s	5.95	6.19	6.08	Pass
Pendulum Velocity at 10 ms	m/s	1.50	1.90	1.67	Pass
Pendulum Velocity at 20 ms	m/s	3.10	3.90	3.23	Pass
Pendulum Velocity at 30 ms	m/s	4.60	5.60	4.63	Pass
Peak "D" Plane Rotation	deg	99.0	114.0	103.1	Pass
Peak Moment in Rotation	Nm	-65.0	-53.0	-59.4	Pass
Negative Moment Decay to -10 Nm	ms	94.0	114.0	108.3	Pass
Overall Test Results					Pass

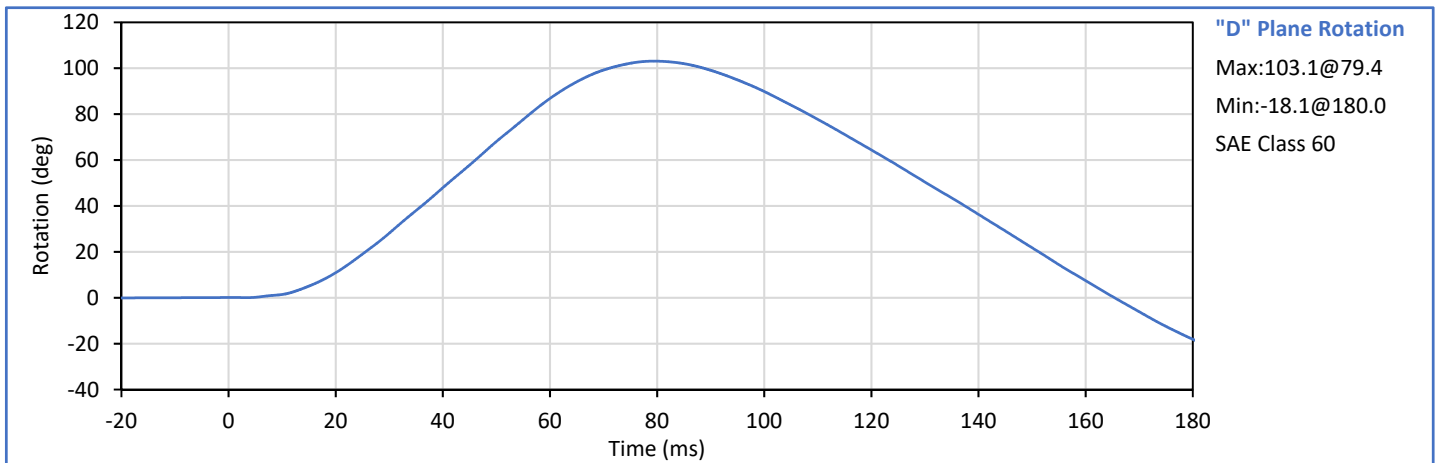
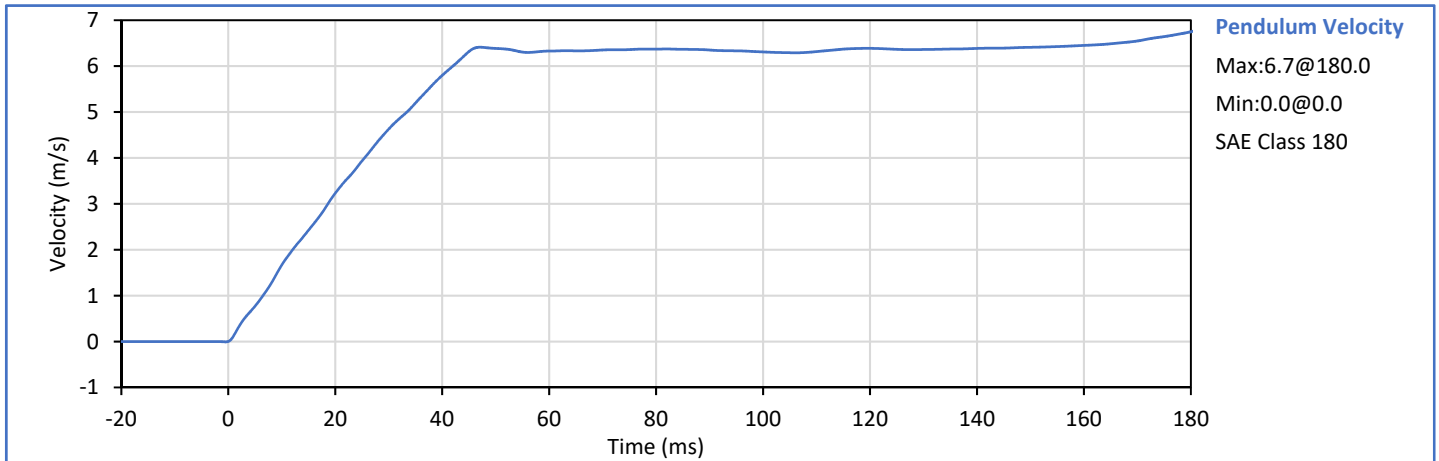



Technician: 
J. Hernandez


Approved By: 
P. Puzzuto

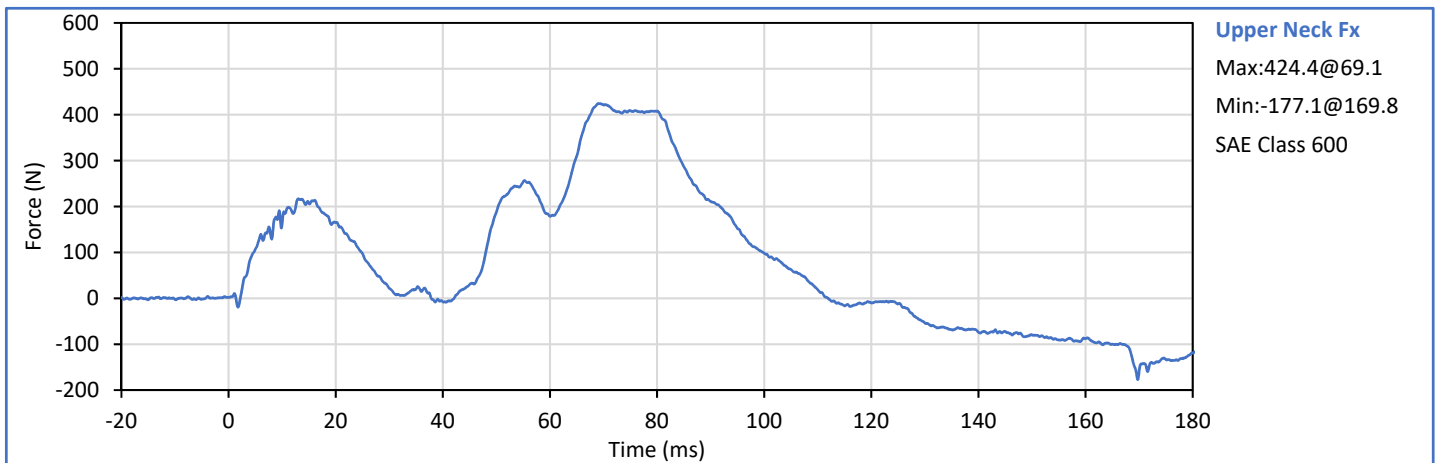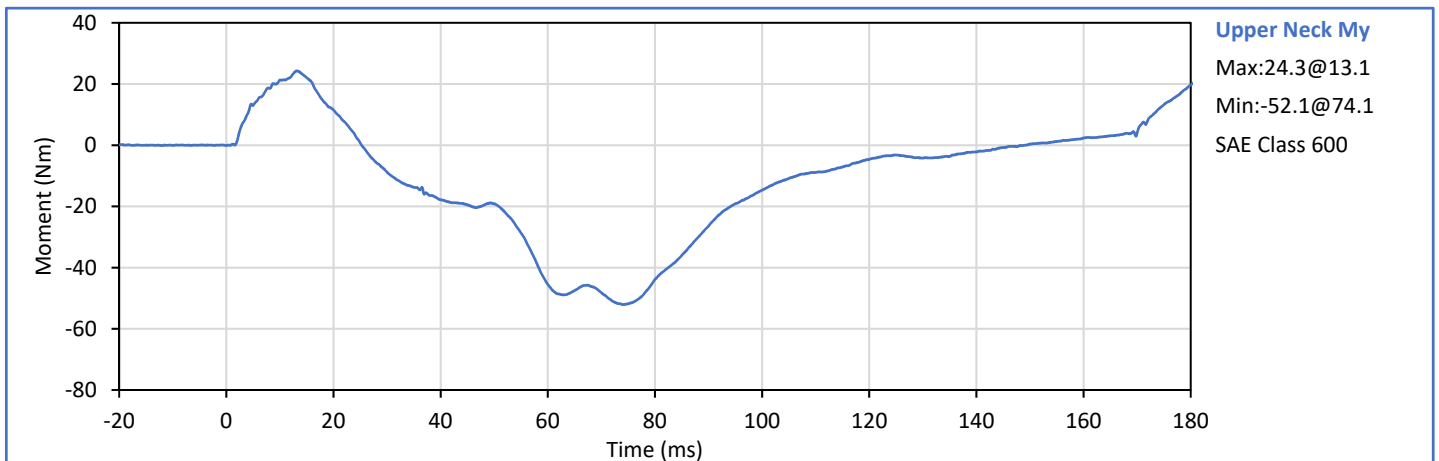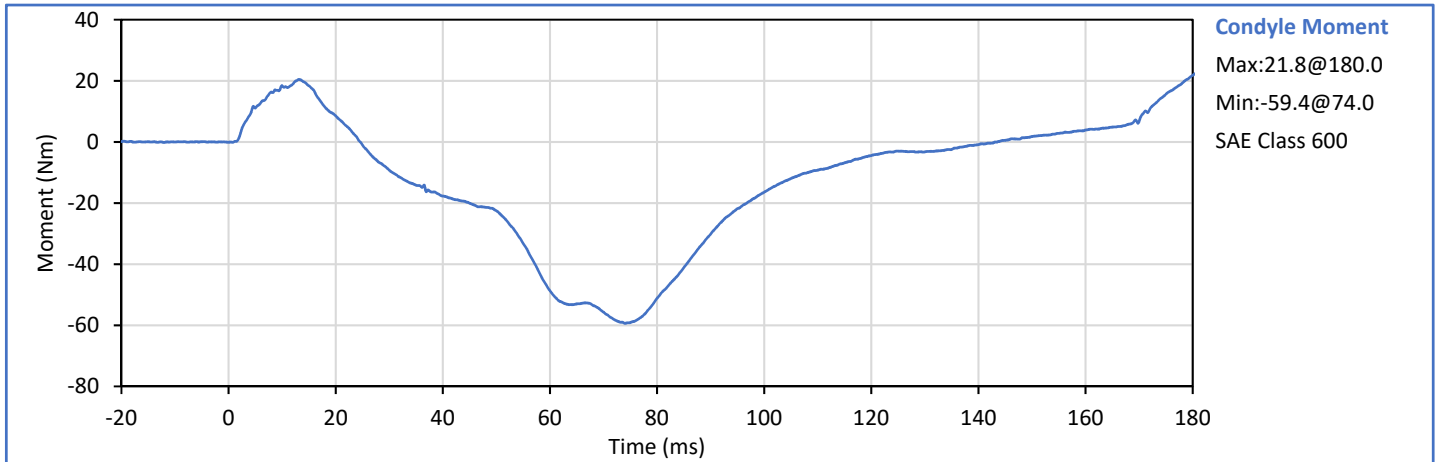



Tested Parameter	Units	Spec. Low	Spec. High	Result	Pass/Fail
Laboratory Temperature	°C	20.6	22.2	21.2	Pass
Laboratory Humidity	%	10	70	33	Pass
Probe Velocity	m/s	6.59	6.83	6.70	Pass
Peak Chest Deflection	mm	50.0	58.0	55.8	Pass
Peak Probe Force, 50 and 58 mm	kN	3.900	4.400	4.227	Pass
Peak Probe Force, 18 and 50 mm	kN	0.000	4.600	3.995	Pass
Internal Hysterisis	%	69.0	85.0	69.7	Pass
Overall Test Results					Pass

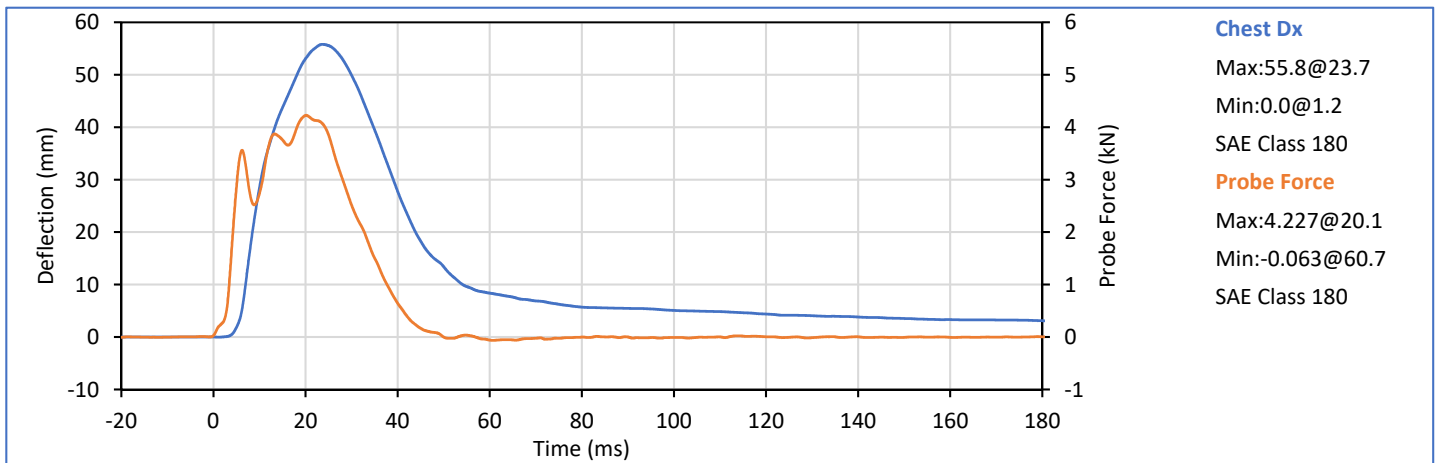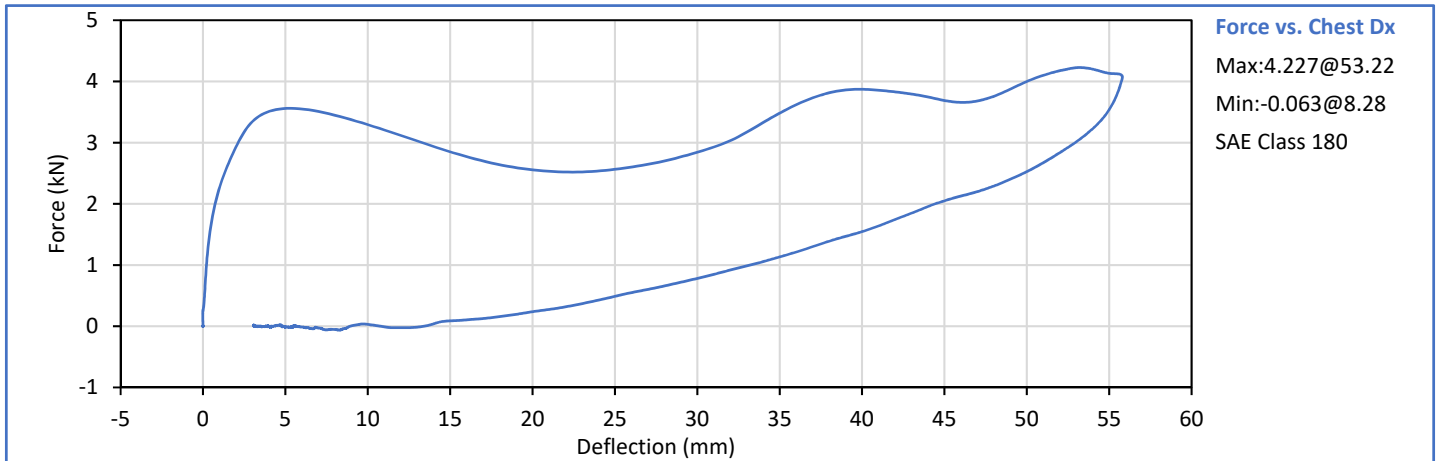



Technician: 
 J. Hernandez

Approved By: 
 P. Puzzuto



Tested Parameter	Units	Spec. Low	Spec. High	Result	Pass/Fail
Laboratory Temperature	°C	18.9	25.6	21.6	Pass
Laboratory Humidity	%	10	70	34	Pass
Orientation Angle	deg	0.0	20.0	15.1	Pass
Test Initial Angle	deg	11.0	19.0	17.7	Pass
Peak Force at 45° (+/-0.5°)	N	320.0	390.0	353.2	Pass
Torso Flexion Rate	deg/s	0.50	1.50	1.12	Pass
Final Reference Plane Angle	deg	-8.0	8.0	2.3	Pass
Overall Test Results					Pass

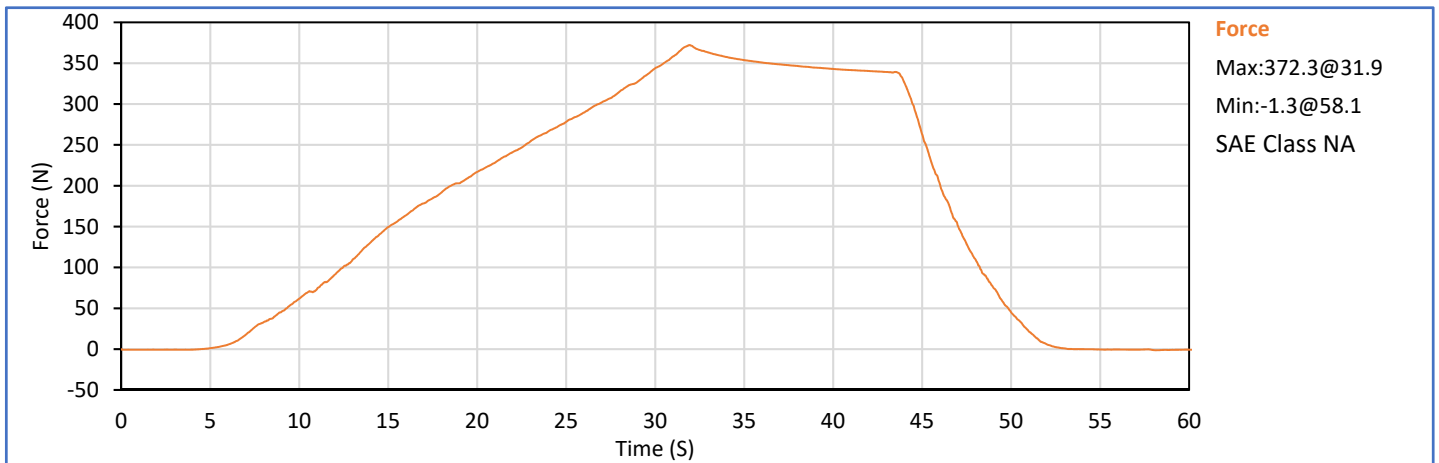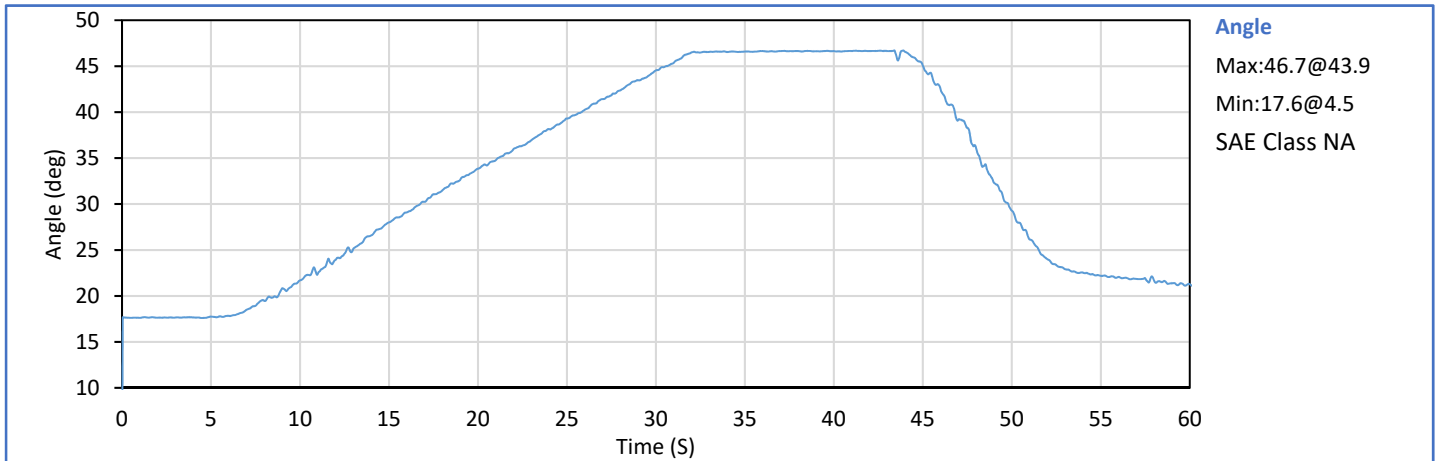

Technician: 
J. Hernandez

Approved By: 
P. Puzzuto

	Tested Parameter	Units	Spec. Low	Spec. High	Result	Pass/Fail
	Laboratory Temperature	°C	18.9	25.6	21.6	Pass
	Laboratory Humidity	%	10	70	34	Pass
Left	Probe Velocity	m/s	2.070	2.130	2.071	Pass
Knee	Peak Resistive Force	N	3450	4060	3902	Pass
Right	Probe Velocity	m/s	2.070	2.130	2.088	Pass
Knee	Peak Resistive Force	N	3450	4060	3939	Pass
Overall Test Results						Pass

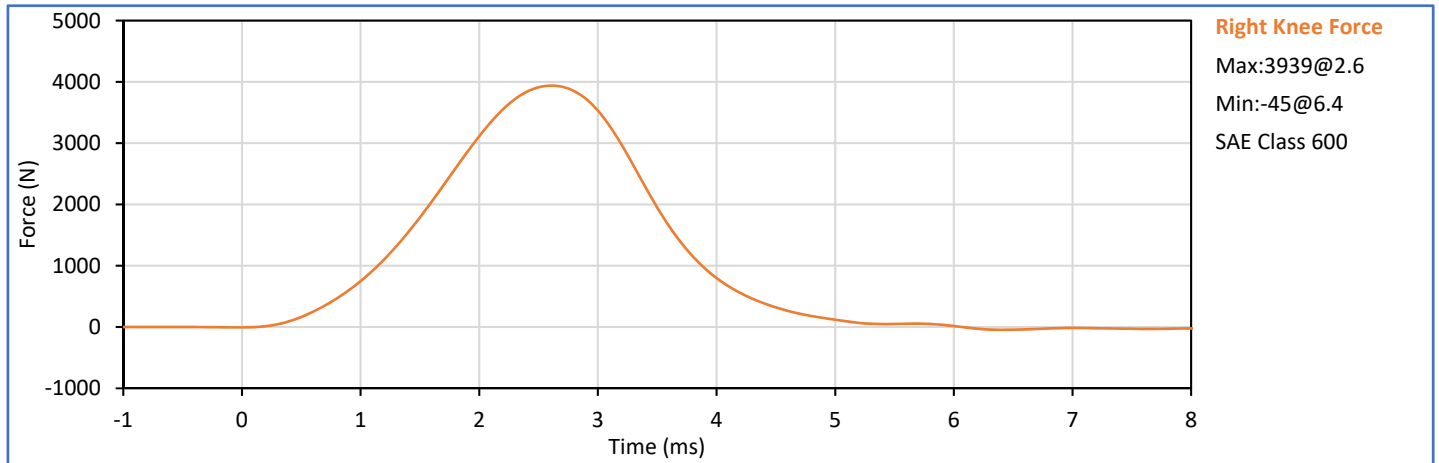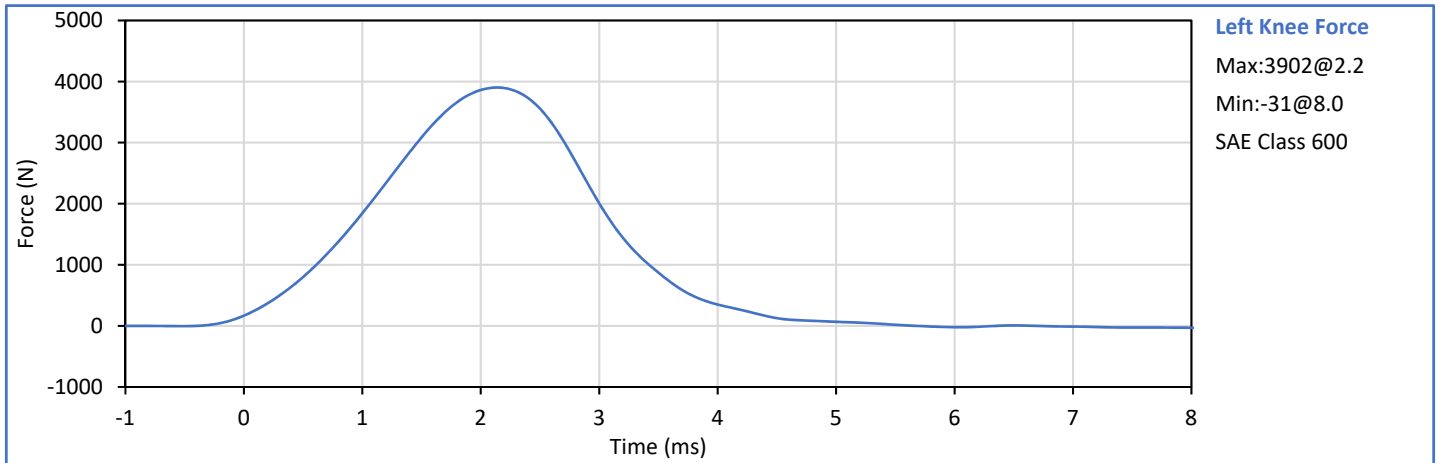

Technician: *J. Hernandez*
J. Hernandez

Approved By: *P. Puzzuto*
P. Puzzuto

APPENDIX C
Post-Test ATD Configuration And Performance Verification Data
Hybrid III 50th Percentile Male ATD
S/N: 360


ATD Serial No.: 360


Test Date: 2019-06-03

Dummy Item	Inspect for	Comments	Damage	OK
Entire ATD	Perform general cleaning			✓
Outer Skin	Gashes, rips, cracks			✓
Head	Ballast secure			✓
	General appearance			✓
Neck bracket	Upper neck firmly attached to lower bracket			✓
Neck	Broken or cracked rubber			✓
	Looseness at the condyle joint			✓
Nodding block	Cracked or out of position			✓
Lumbar Spine	Broken or cracked rubber			✓
Ribs	Broken or bent ribs			✓
	Broken or bent rib supports			✓
	Damping material separated or cracked			✓
	Rubber bumpers in place			✓
Chest Displ. Assembly	Bent shaft			✓
	Slider arm riding in track			✓
Sensors	Check cables for cuts, tears			✓
	Check for damaged insulation			✓
Accelerometer Mounting	Head mounting secure			✓
	Chest mounting secure			✓
Knees	Skin condition			✓
	Insert (do not remove)			✓
	Casting			✓
Limbs	Normal movement and adjustment			✓
Knee Sliders	Wires intact			✓
	Rubber returned to "resting" position			✓
Pelvis	Broken			✓
Other	Describe below as needed			✓

Describe any repairs or replacement of parts or other findings:

No Problems Found

Technician: 
J. Hernandez

Approved By: 
P. Puzzuto

Tested Parameter	Units	Spec. Low	Spec. High	Result	Pass/Fail
Laboratory Temperature	°C	20.6	22.2	21.4	Pass
Laboratory Relative Humidity	%	10	70	26	Pass
A - Total sitting height	mm	879	889	887	Pass
B - Shoulder pivot height	mm	505	521	517	Pass
C - 'H' point height	mm	84	89	87	Pass
D - 'H' point location from backline	mm	135	140	139	Pass
E - Shoulder pivot from backline	mm	84	94	91	Pass
F - Thigh clearance	mm	140	155	151	Pass
G - Back of elbow to wrist pivot	mm	290	305	297	Pass
H - Head back to backline	mm	41	46	46	Pass
I - Shoulder to elbow length	mm	330	345	343	Pass
J - Elbow rest height	mm	190	211	204	Pass
K - Buttock to knee length	mm	579	604	589	Pass
L - Popliteal length	mm	429	455	440	Pass
M - Knee pivot height	mm	485	500	495	Pass
N - Buttock popliteal length	mm	452	477	464	Pass
O - Chest depth without jacket	mm	213	229	220	Pass
P - Foot length	mm	251	267	258	Pass
V - Shoulder breadth	mm	422	437	431	Pass
W - Foot breadth	mm	91	107	103	Pass
Y - Chest circum. (w/chest jacket)	mm	970	1001	980	Pass
Z - Waist circum.	mm	836	866	851	Pass
AA - Location for chest circum.	mm	429	434	432	Pass
BB - Location for waist circum.	mm	226	231	228	Pass
Overall Test Results					Pass

Technician: _____





J. Hernandez


Approved By: _____




P. Puzzuto



Tested Parameter	Units	Spec. Low	Spec. High	Result	Pass/Fail
Laboratory Temperature	°C	18.9	25.6	21.1	Pass
Laboratory Humidity	%	10	70	33	Pass
Peak Resultant Acceleration	g	225.0	275.0	230.1	Pass
Peak Lateral Acceleration	g	-15.0	15.0	-10.6	Pass
Oscillations After Main Pulse	%	0.0	10.0	3.0	Pass
Is Acceleration Unimodal?	Yes/No	Yes		Yes	Pass
Overall Test Results					Pass

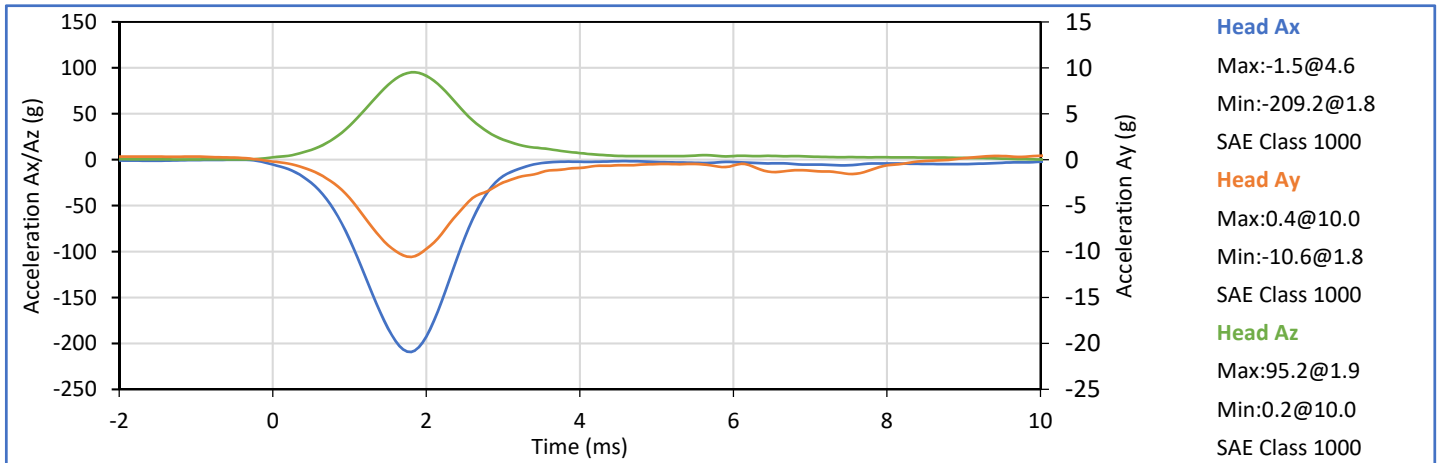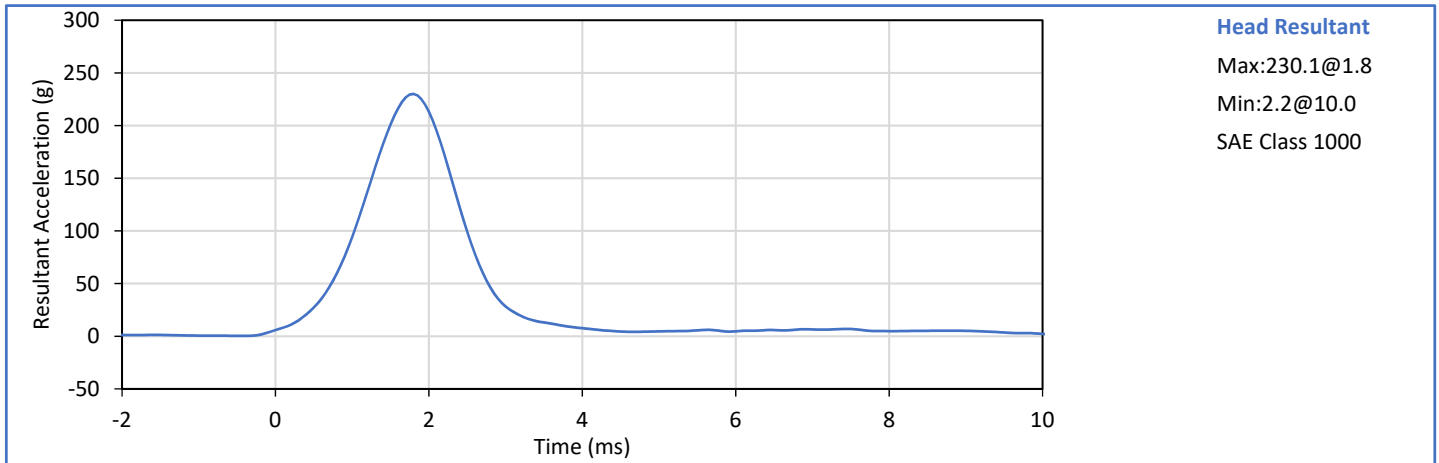



Technician: 
J. Hernandez




Approved By: 
P. Puzzuto

Tested Parameter	Units	Spec. Low	Spec. High	Result	Pass/Fail
Laboratory Temperature	°C	20.6	22.2	21.4	Pass
Laboratory Humidity	%	10	70	30	Pass
Pendulum Velocity	m/s	6.89	7.13	6.98	Pass
Pendulum Deceleration at 10 ms	g	22.5	27.5	25.9	Pass
Pendulum Deceleration at 20 ms	g	17.6	22.6	22.3	Pass
Pendulum Deceleration at 30 ms	g	12.5	18.5	16.3	Pass
Peak Pendulum Decel. after 30 ms	g	0.0	29.0	16.3	Pass
Deceleration Decay to Cross 5 g	ms	34.0	42.0	35.8	Pass
"D" Plane Rotation peak	deg	64.0	78.0	74.1	Pass
	ms	57.0	64.0	58.2	Pass
"D" Plane Rotation Decay To Zero	ms	113.0	128.0	117.9	Pass
Moment About Occipital Condyle	Nm	88.1	108.5	96.5	Pass
	ms	47.0	58.0	48.1	Pass
Moment Decay, Peak to Zero	ms	97.0	107.0	97.6	Pass
Overall Test Results					Pass

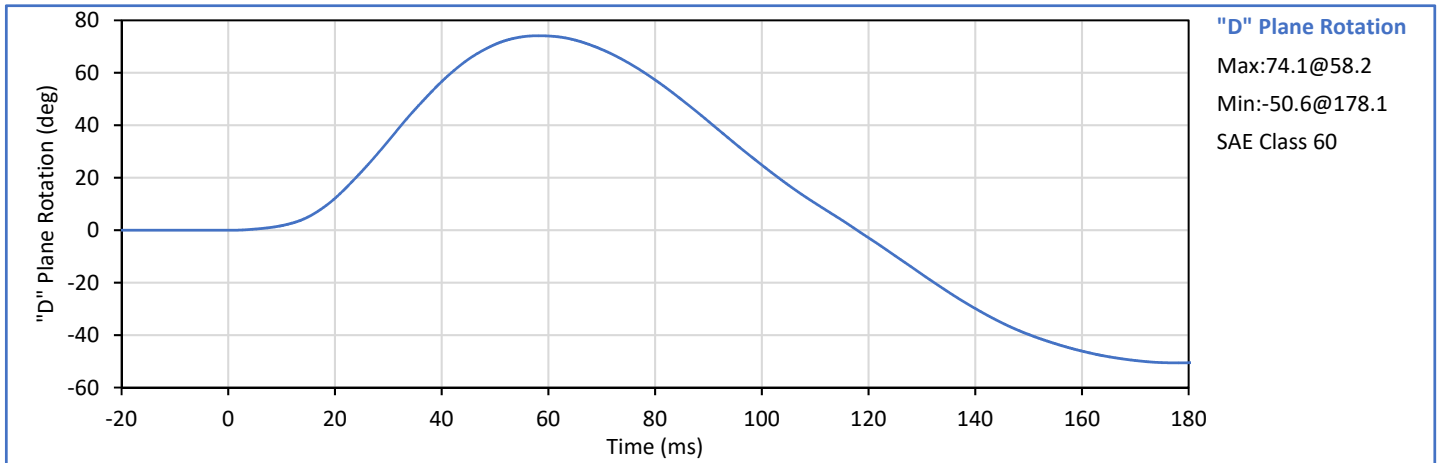
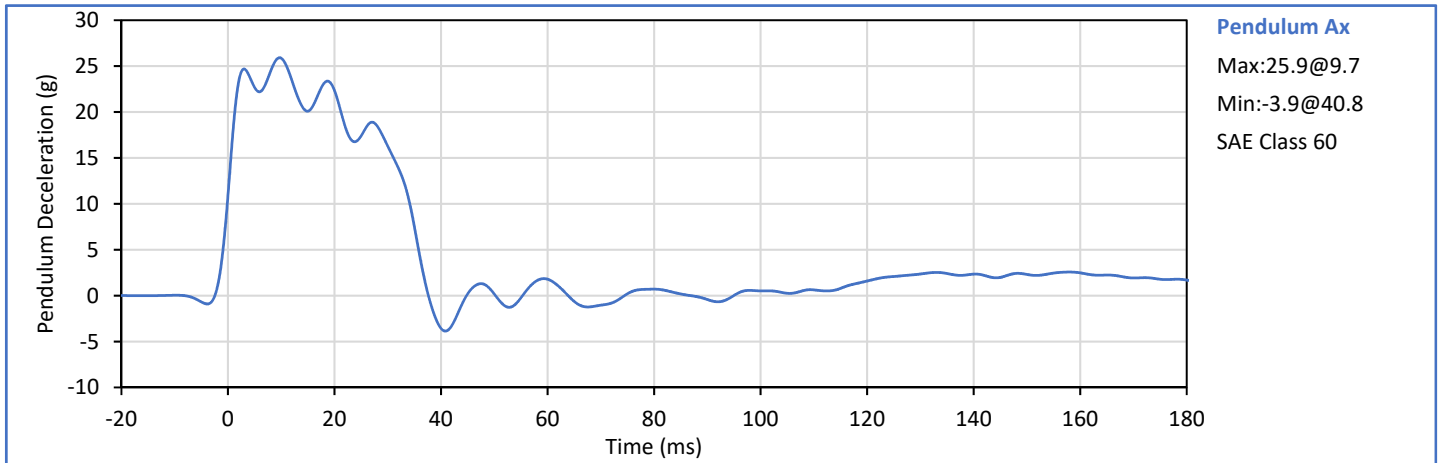



Technician: 
J. Hernandez


Approved By: 
P. Puzzuto

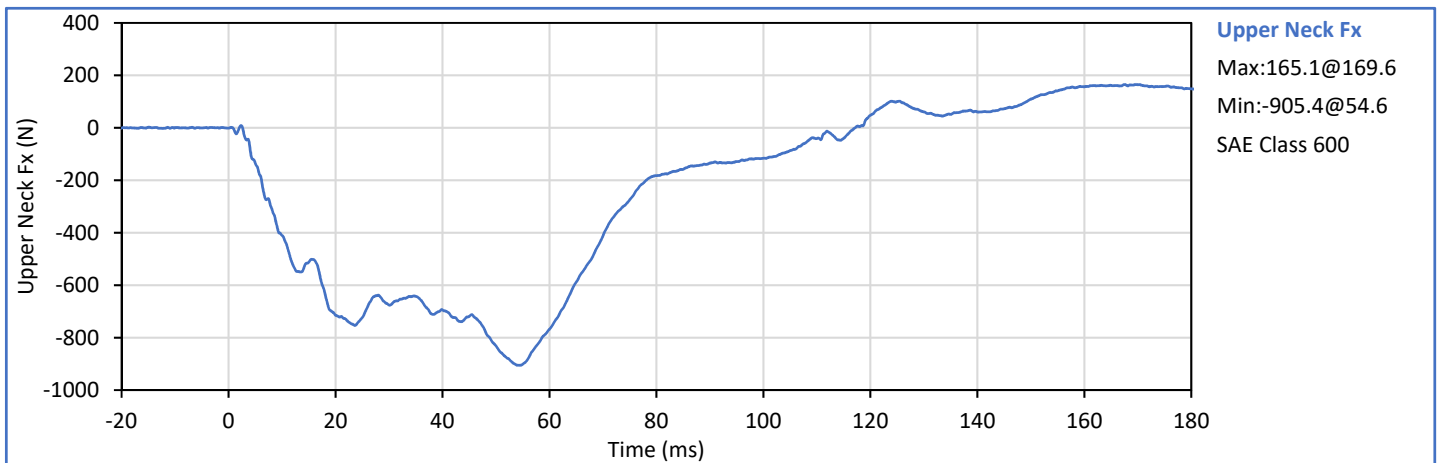
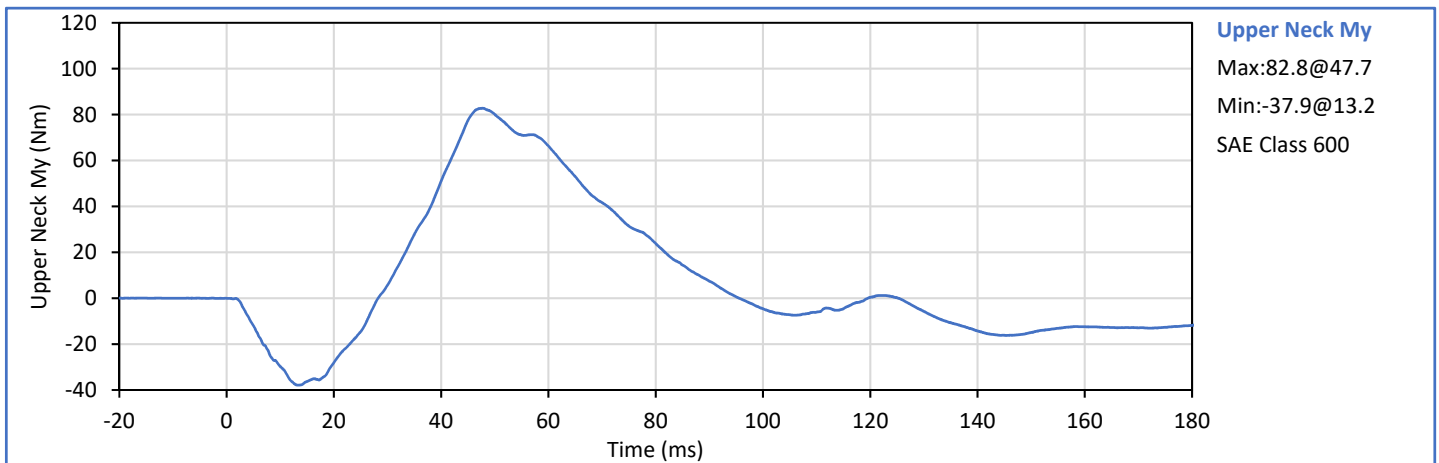
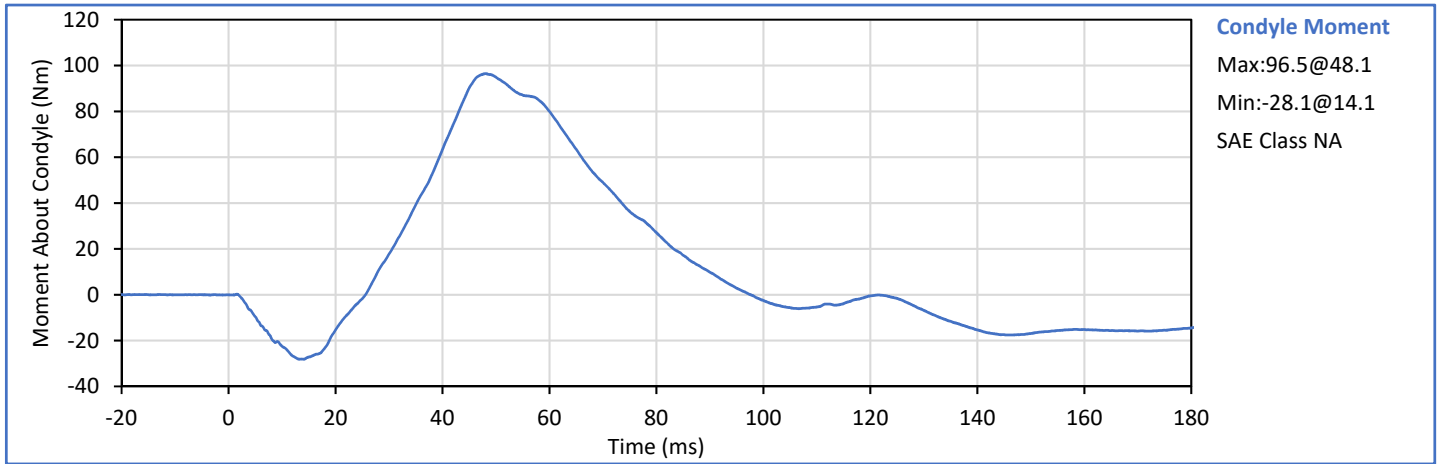


Tested Parameter	Units	Spec. Low	Spec. High	Result	Pass/Fail
Laboratory Temperature	°C	20.6	22.2	21.1	Pass
Laboratory Humidity	%	10	70	30	Pass
Pendulum Velocity	m/s	5.94	6.19	5.98	Pass
Pendulum Deceleration at 10 ms	g	17.2	21.2	21.1	Pass
Pendulum Deceleration at 20 ms	g	14.0	19.0	18.8	Pass
Pendulum Deceleration at 30 ms	g	11.0	16.0	12.8	Pass
Peak Pendulum Decel. after 30 ms	g	0.0	22.0	12.8	Pass
Deceleration Decay to Cross 5 g	ms	38.0	46.0	38.5	Pass
"D" Plane Rotation peak	deg	81.0	106.0	99.3	Pass
	ms	72.0	82.0	75.0	Pass
"D" Plane Rotation Decay To Zero	ms	147.0	174.0	156.5	Pass
Moment About Occipital Condyle	Nm	-79.9	-52.9	-70.3	Pass
	ms	65.0	79.0	69.7	Pass
Moment Decay, Peak to Zero	ms	120.0	148.0	137.1	Pass
Overall Test Results					Pass

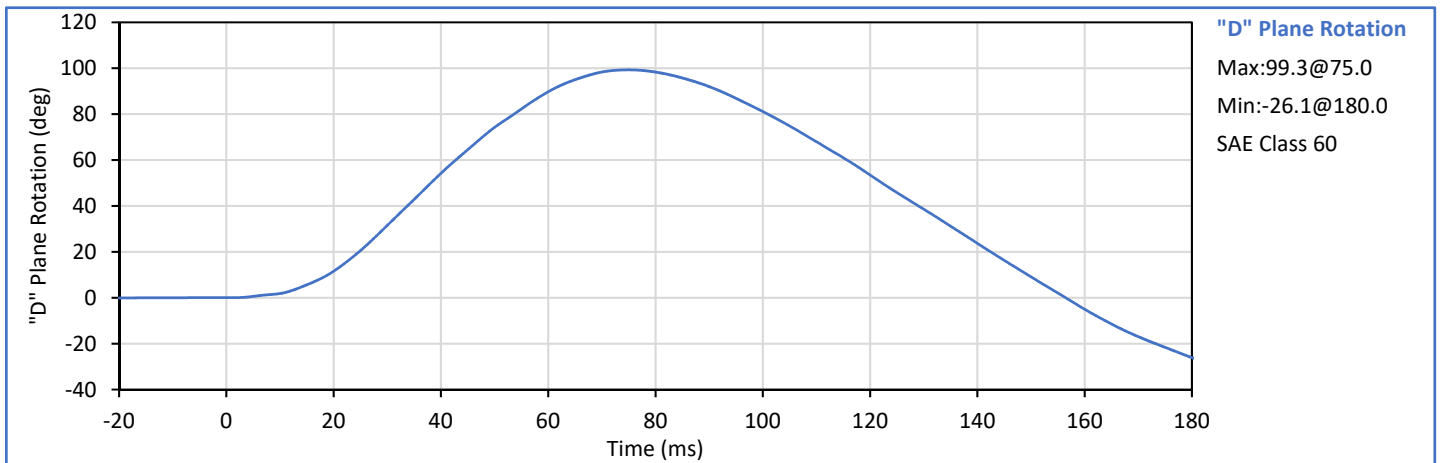
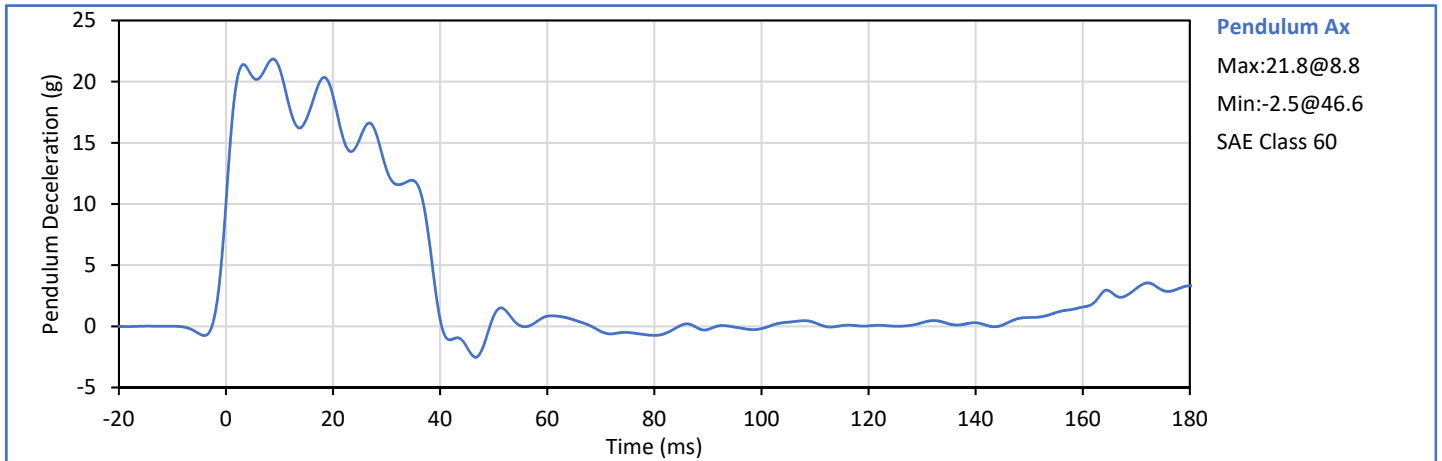



Technician: 
J. Hernandez


Approved By: 
P. Puzzuto

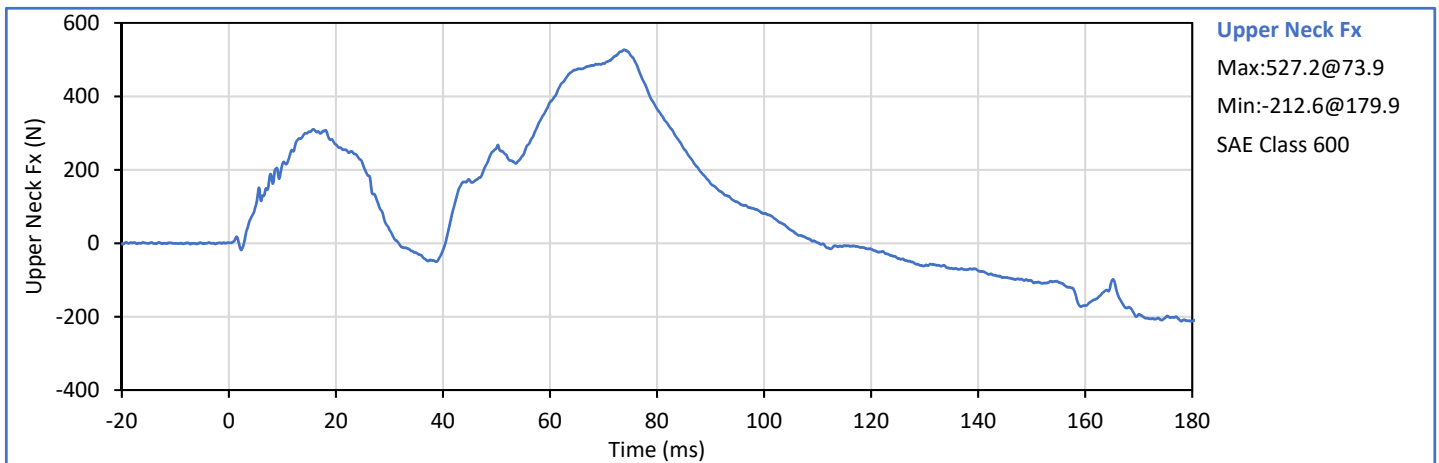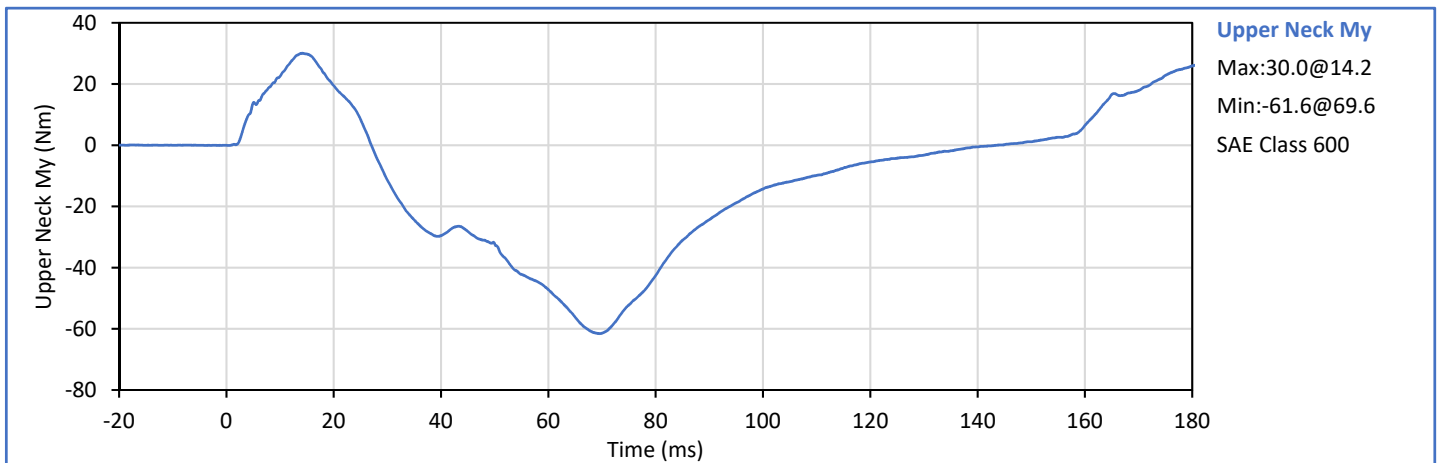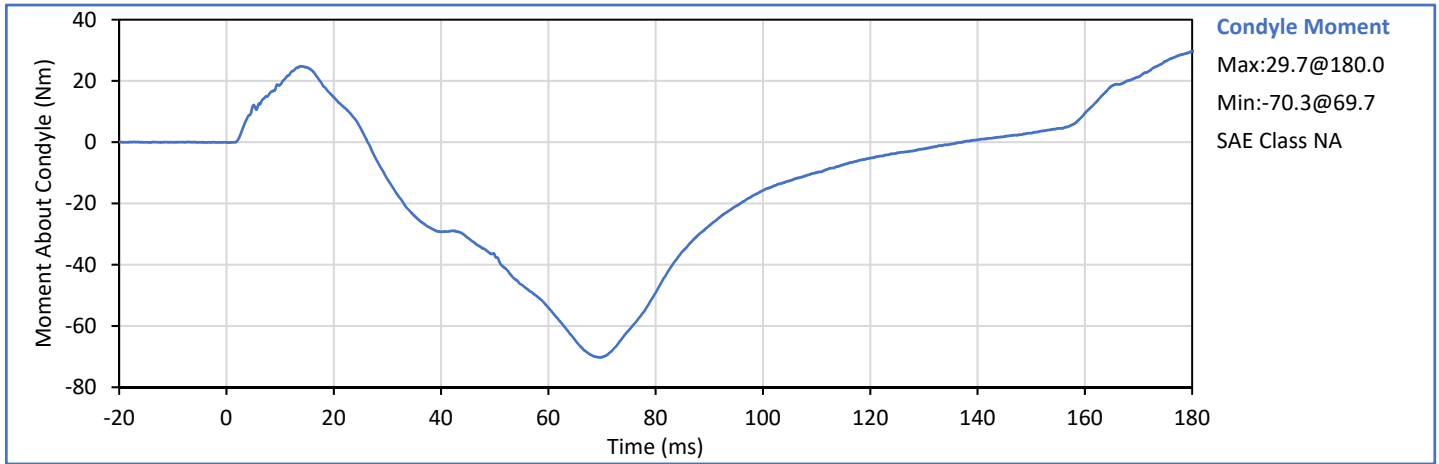



Tested Parameter	Units	Spec. Low	Spec. High	Result	Pass/Fail
Laboratory Temperature	°C	20.6	22.2	21.9	Pass
Laboratory Humidity	%	10	70	34	Pass
Probe Velocity	m/s	6.58	6.82	6.65	Pass
Peak Chest Deflection	cm	6.35	7.26	6.85	Pass
Peak Probe Force	kN	5.159	5.893	5.621	Pass
Internal Hysterisis	%	69.0	85.0	71.0	Pass
Overall Test Results					Pass

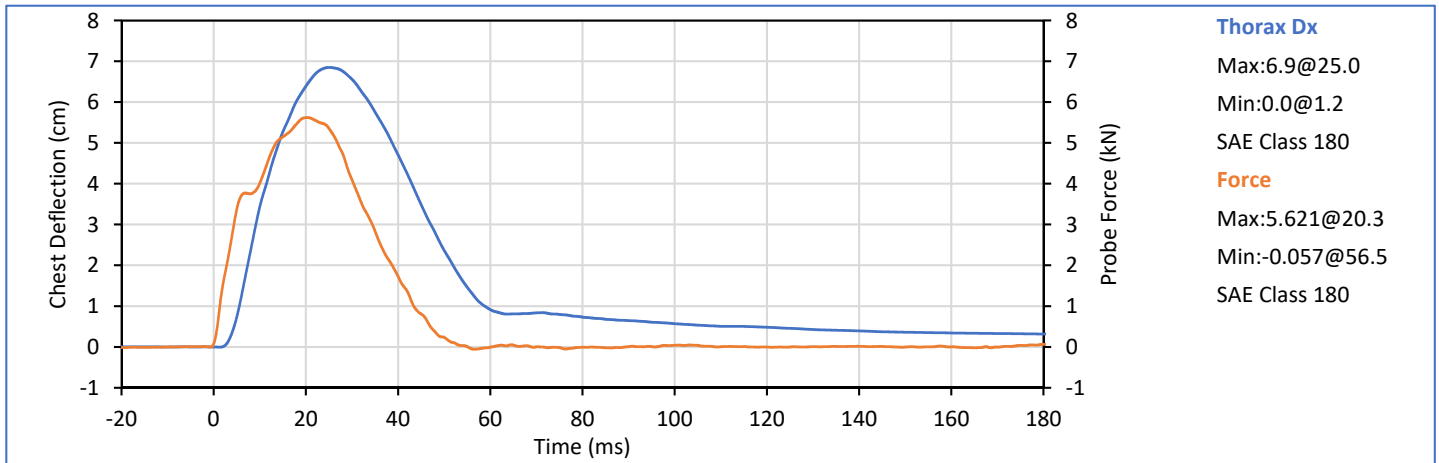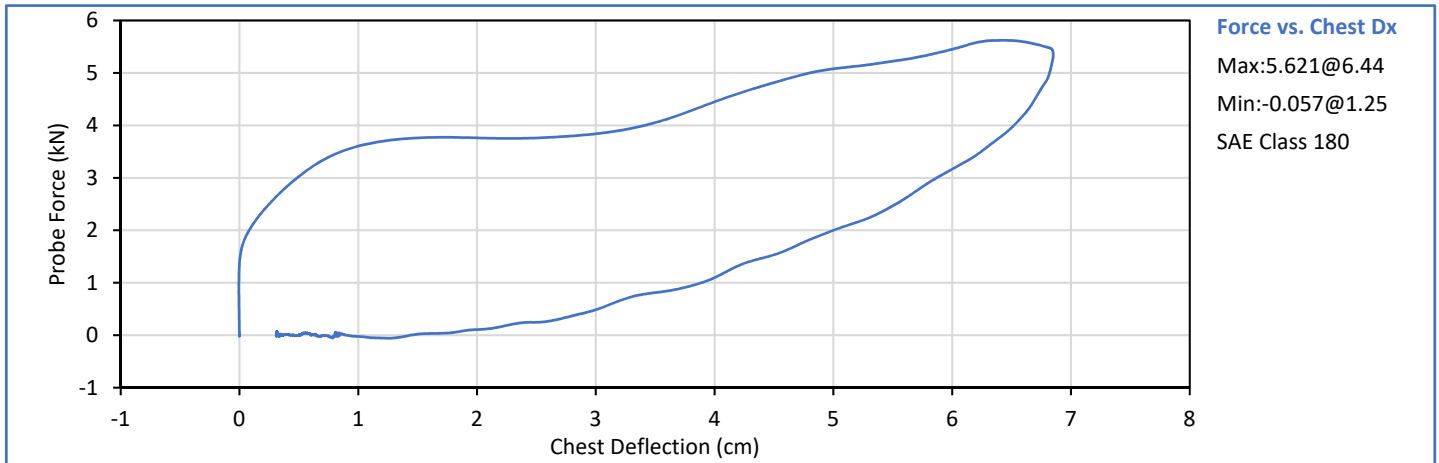



Technician: 
 J. Hernandez

Approved By: 
 P. Puzzuto



	Tested Parameter	Units	Spec. Low	Spec. High	Result	Pass/Fail
	Laboratory Temperature	°C	18.9	25.6	21.7	Pass
	Laboratory Humidity	%	10	70	35	Pass
Left Hip	Left Hip Rotation Rate	deg/s	5.0	10.0	5.7	Pass
	Left Femur Torque at 30°	Nm	0.0	95.0	66.2	Pass
	Left Hip Rotation at 203 Nm	deg	40.0	50.0	47.4	Pass
Right Hip	Right Hip Rotation Rate	deg/s	5.0	10.0	5.7	Pass
	Right Femur Torque at 30°	Nm	0.0	95.0	65.9	Pass
	Right Hip Rotation at 203 Nm	deg	40.0	50.0	47.7	Pass
Overall Test Results						Pass

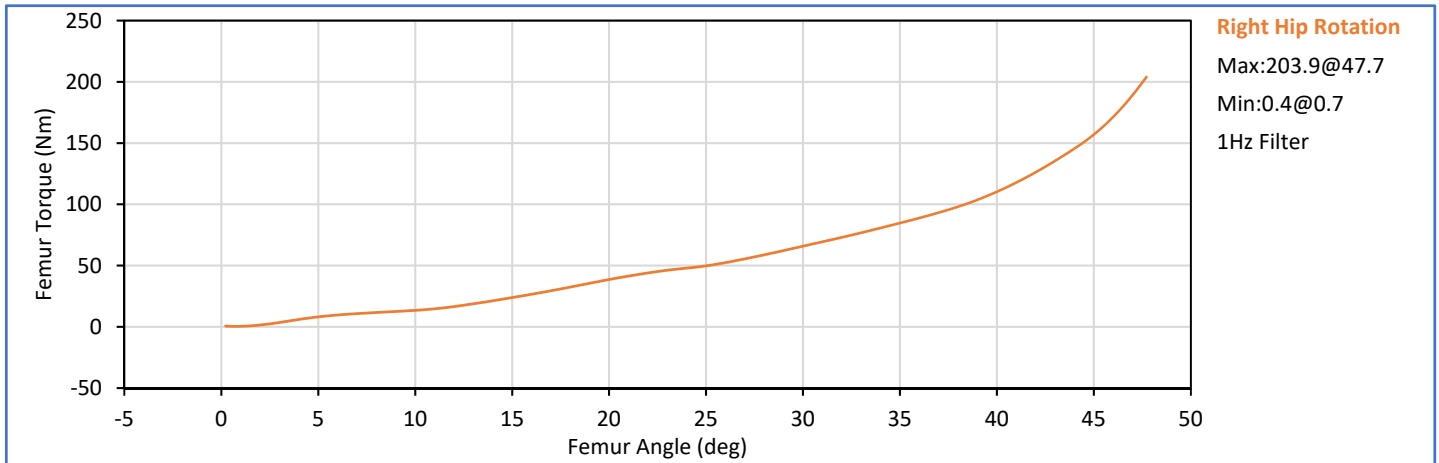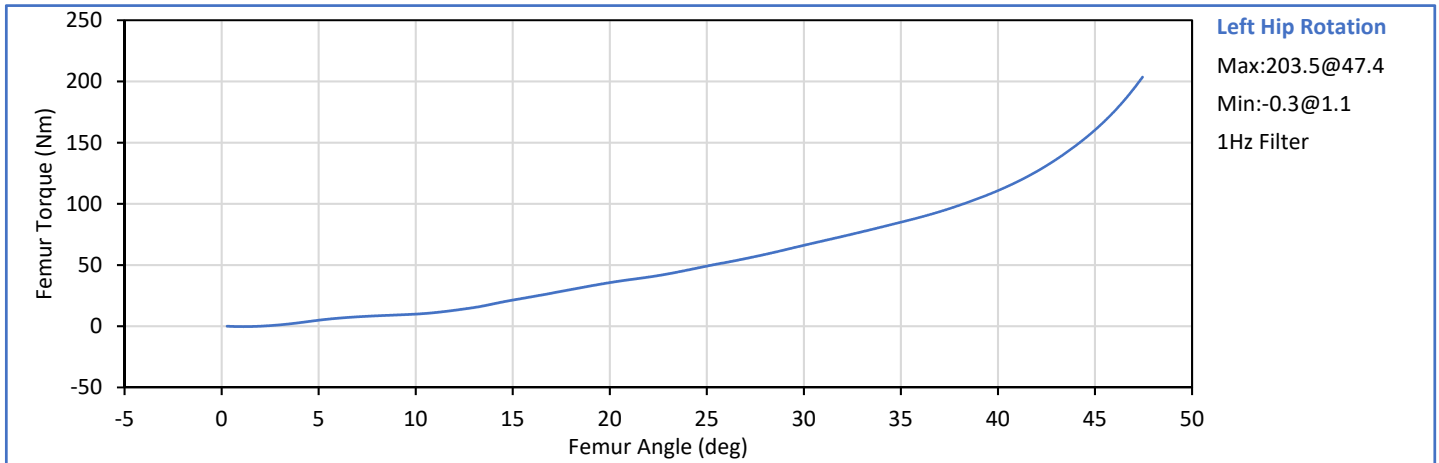



Technician: 
J. Hernandez

Approved By: 
P. Puzzuto

	Tested Parameter	Units	Spec. Low	Spec. High	Result	Pass/Fail
	Laboratory Temperature	°C	18.9	25.6	21.7	Pass
	Laboratory Humidity	%	10	70	37	Pass
Left	Probe Velocity	m/s	2.070	2.130	2.088	Pass
Knee	Peak Resistive Force	N	4715	5782	5014	Pass
Right	Probe Velocity	m/s	2.070	2.130	2.088	Pass
Knee	Peak Resistive Force	N	4715	5782	5254	Pass
Overall Test Results						Pass

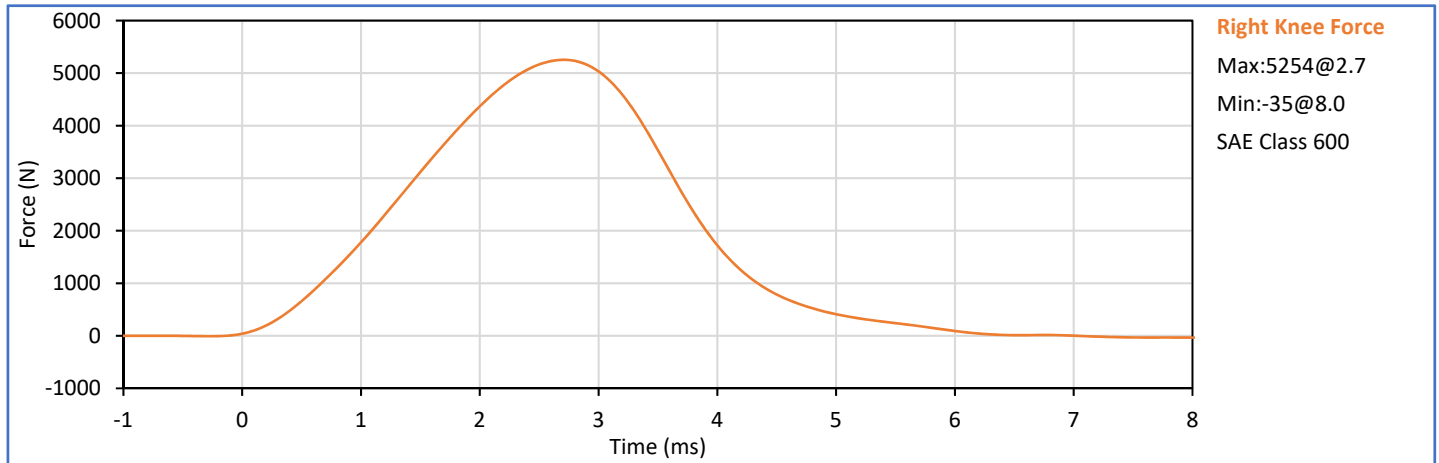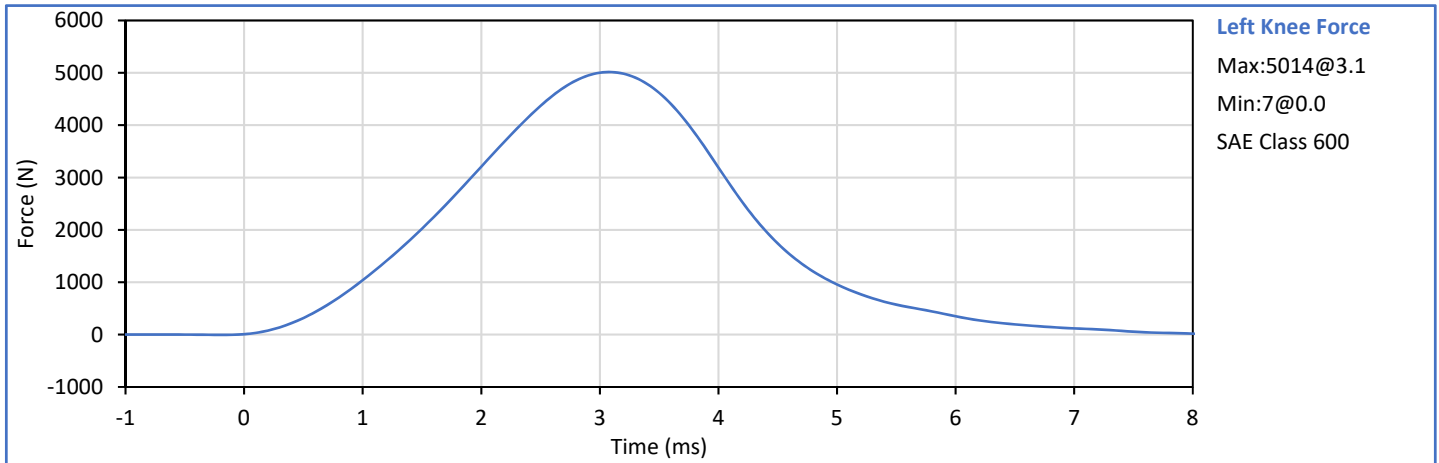

Technician: 
J. Hernandez

Approved By: 
P. Puzzuto

APPENDIX C
Post-Test ATD Configuration And Performance Verification Data
Hybrid III 5th Percentile Female ATD
S/N: 630

Dummy Item	Inspect for	Comments	Damage	Okay
Entire ATD	Perform general cleaning			✓
Outer Skin	Gashes, rips, cracks			✓
Head	Ballast secure			✓
	General appearance			✓
Neck bracket	Upper neck firmly attached to lower bracket			✓
Neck	Broken or cracked rubber			✓
	Looseness at the condyle joint			✓
Nodding block	Cracked or out of position			✓
Lumbar Spine	Broken or cracked rubber			✓
Ribs	Broken or bent ribs			✓
	Broken or bent rib supports			✓
	Damping material separated or cracked			✓
	Rubber bumpers in place			✓
Chest Displ. Assembly	Bent shaft			✓
	Slider arm riding in track			✓
Sensors	Check cables for cuts, tears			✓
	Check for damaged insulation			✓
Accelerometer Mounting	Head mounting secure			✓
	Chest mounting secure			✓
Knees	Skin condition			✓
	Insert (do not remove)			✓
	Casting			✓
Limbs	Normal movement and adjustment			✓
Knee Sliders	Wires intact			✓
	Rubber returned to "resting" position			✓
Pelvis	Broken			✓
Other	Describe below as needed			✓

Describe any repairs or replacement of parts or other findings:

No Problems Found

Technician: _____

J. Hernandez

Approved By: _____

P. Puzzuto

Tested Parameter	Units	Spec. Low	Spec. High	Result	Pass/Fail
Laboratory Temperature	°C	20.6	22.2	21.1	Pass
Laboratory Relative Humidity	%	10	70	35	Pass
A - Total sitting height	mm	775	800	783	Pass
B - Shoulder pivot height	mm	432	457	443	Pass
C - 'H' point height	mm	81	86	86	Pass
D - 'H' point location from backline	mm	145	150	147	Pass
E - Shoulder pivot from backline	mm	69	84	76	Pass
F - Thigh clearance	mm	119	135	126	Pass
G - Back of elbow to wrist pivot	mm	244	259	252	Pass
H - Head back to backline	mm	41	46	42	Pass
I - Shoulder to elbow length	mm	277	297	285	Pass
J - Elbow rest height	mm	183	203	197	Pass
K - Buttock to knee length	mm	521	546	537	Pass
L - Popliteal length	mm	356	376	368	Pass
M - Knee pivot height	mm	394	419	409	Pass
N - Buttock popliteal length	mm	414	439	423	Pass
O - Chest depth without jacket	mm	175	191	180	Pass
P - Foot length	mm	219	234	226	Pass
R - Buttock to Knee Pivot Length	mm	457	483	470	Pass
S - Head Breadth	mm	137	147	145	Pass
T - Head Depth	mm	178	188	184	Pass
U - Hip Breadth	mm	300	315	308	Pass
V - Shoulder breadth	mm	351	366	356	Pass
W - Foot breadth	mm	79	94	85	Pass
X - Head circum.	mm	528	549	535	Pass
Y - Chest circum. (w/chest jacket)	mm	851	881	863	Pass
Z - Waist circum.	mm	760	790	782	Pass
AA - Location for chest circum.	mm	333	358	343	Pass
BB - Location for waist circum.	mm	160	170	168	Pass
Overall Test Results					Pass

Technician: _____





J. Hernandez


Approved By: _____




P. Puzzuto



Tested Parameter	Units	Spec. Low	Spec. High	Result	Pass/Fail
Laboratory Temperature	°C	18.9	25.6	21.4	Pass
Laboratory Humidity	%	10	70	22	Pass
Peak Resultant Acceleration	g	250.0	300.0	292.3	Pass
Peak Lateral Acceleration	g	-15.0	15.0	-1.6	Pass
Oscillations After Main Pulse	%	0.0	10.0	0.8	Pass
Is Acceleration Unimodal?	Yes/No	Yes		Yes	Pass
Overall Test Results					Pass

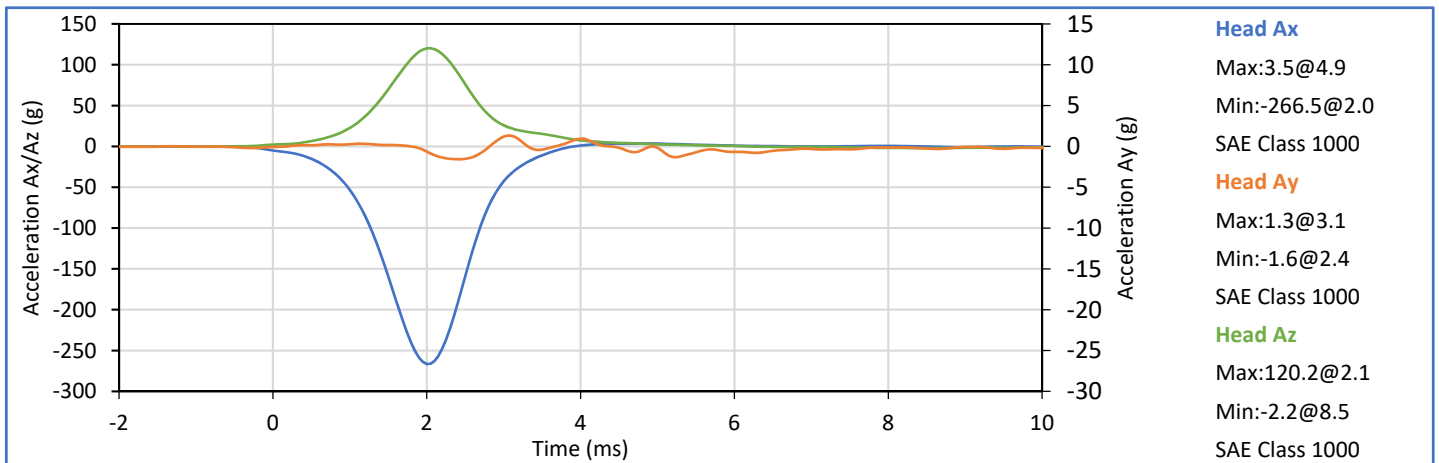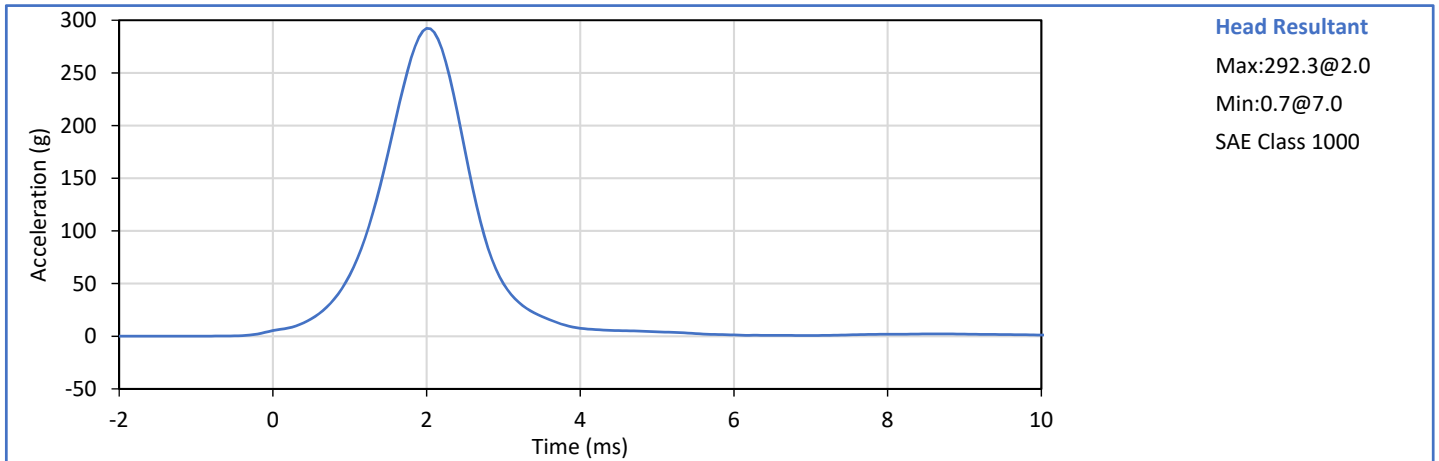



Technician: 
J. Hernandez




Approved By: 
P. Puzzuto

Tested Parameter	Units	Spec. Low	Spec. High	Result	Pass/Fail
Laboratory Temperature	°C	20.6	22.2	21.1	Pass
Laboratory Humidity	%	10	70	34	Pass
Pendulum Velocity	m/s	6.89	7.13	6.89	Pass
Pendulum Velocity at 10 ms	m/s	2.10	2.50	2.48	Pass
Pendulum Velocity at 20 ms	m/s	4.00	5.00	4.79	Pass
Pendulum Velocity at 30 ms	m/s	5.80	7.00	6.60	Pass
Peak "D" Plane Rotation	deg	77.0	91.0	81.4	Pass
Peak Moment in Rotation	Nm	69.0	83.0	74.2	Pass
Positive Moment Decay to 10 Nm	ms	80.0	100.0	84.2	Pass
Overall Test Results					Pass

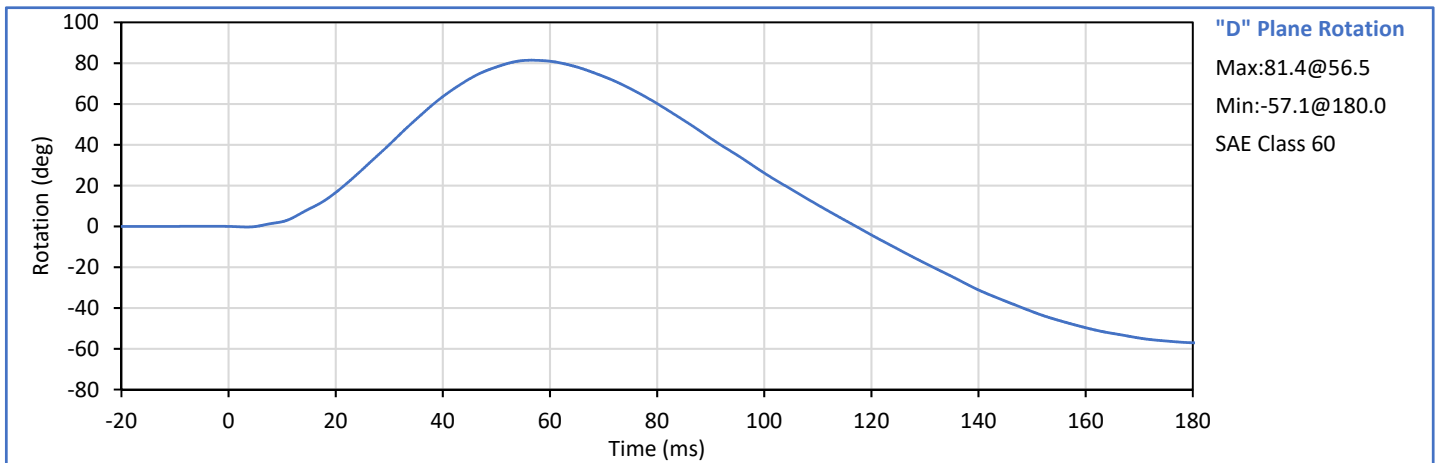
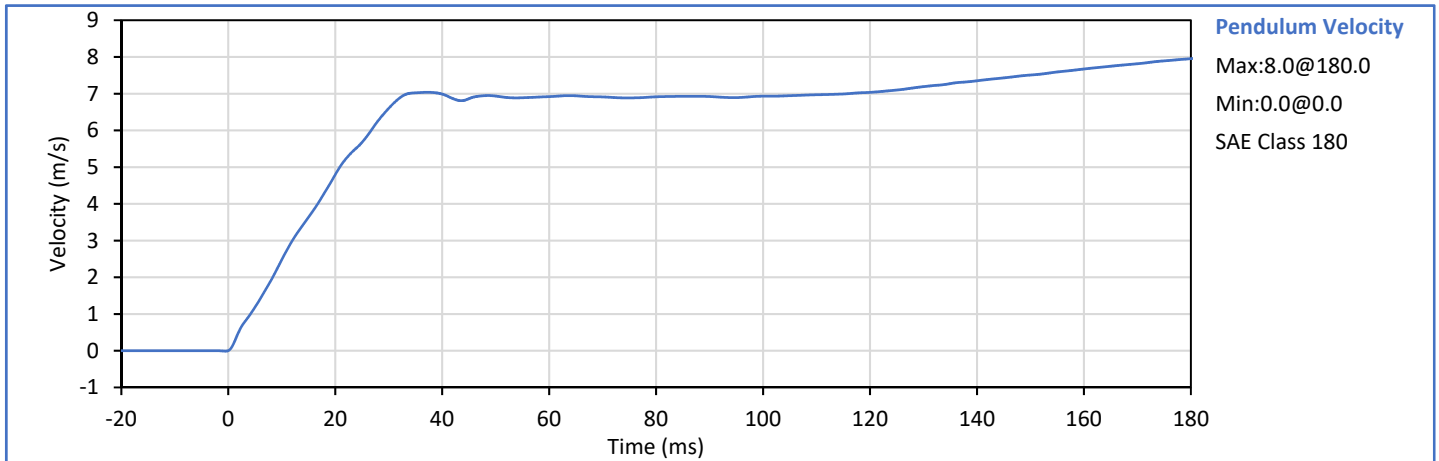



Technician: 
J. Hernandez


Approved By: 
P. Puzzuto

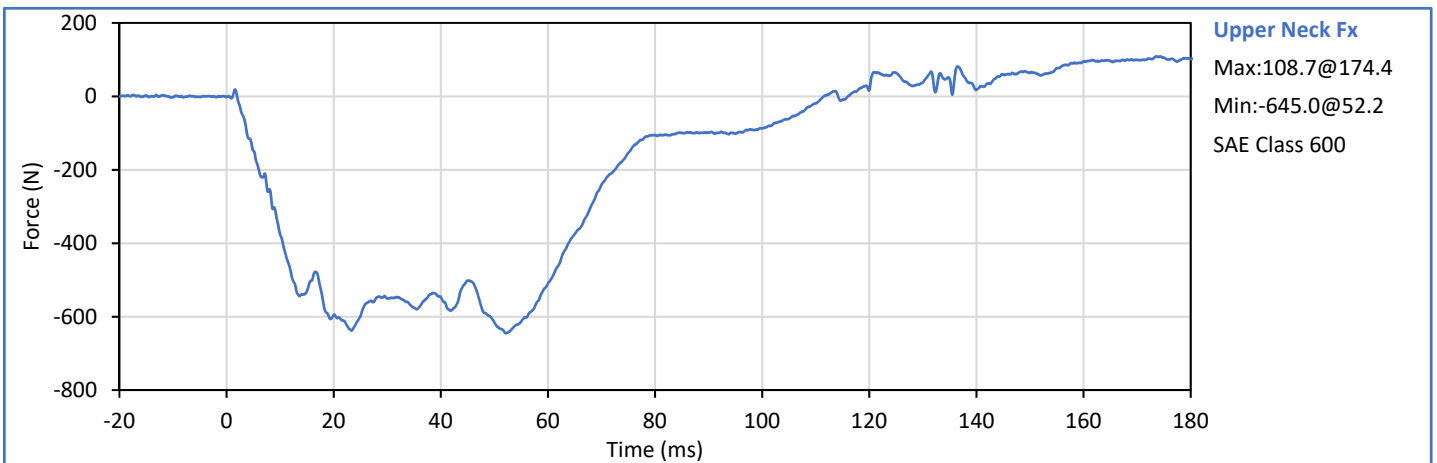
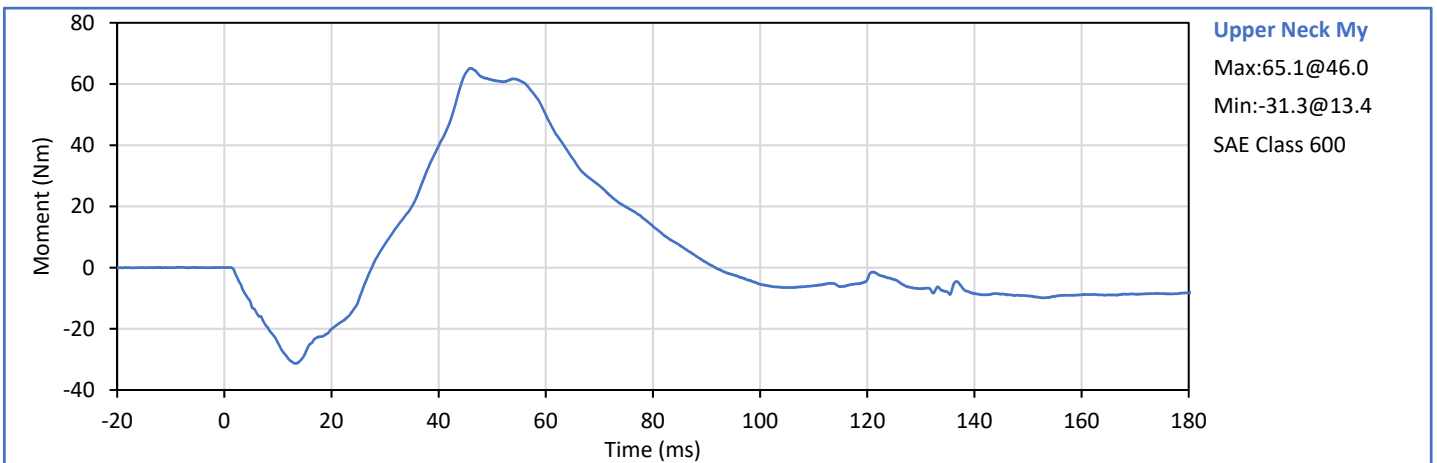
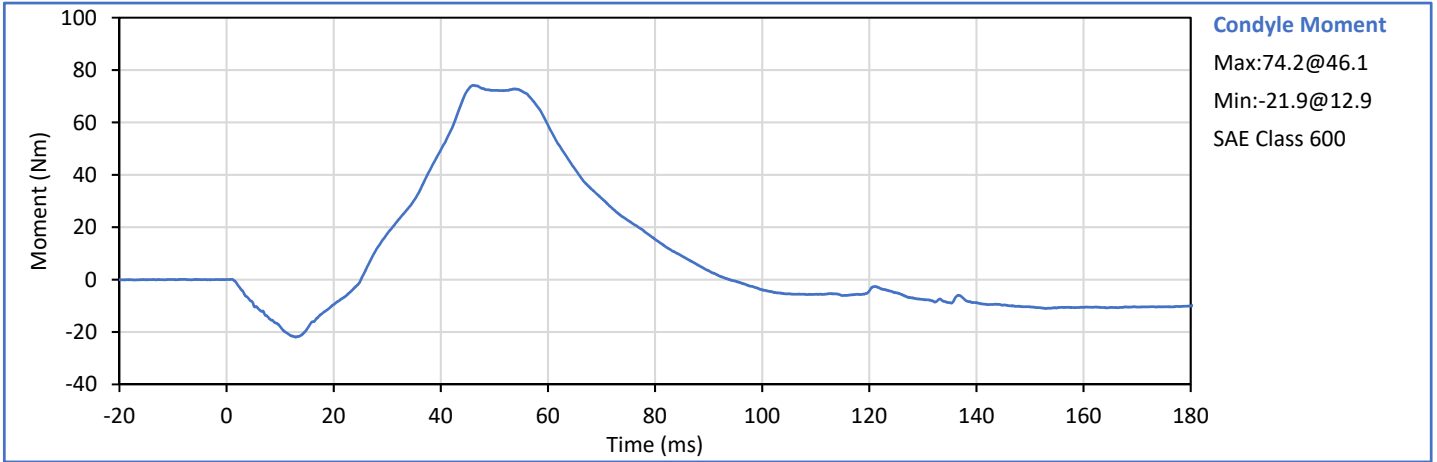


Tested Parameter	Units	Spec. Low	Spec. High	Result	Pass/Fail
Laboratory Temperature	°C	20.6	22.2	21.1	Pass
Laboratory Humidity	%	10	70	34	Pass
Pendulum Velocity	m/s	5.95	6.19	6.09	Pass
Pendulum Velocity at 10 ms	m/s	1.50	1.90	1.72	Pass
Pendulum Velocity at 20 ms	m/s	3.10	3.90	3.42	Pass
Pendulum Velocity at 30 ms	m/s	4.60	5.60	5.00	Pass
Peak "D" Plane Rotation	deg	99.0	114.0	109.8	Pass
Peak Moment in Rotation	Nm	-65.0	-53.0	-57.6	Pass
Negative Moment Decay to -10 Nm	ms	94.0	114.0	100.6	Pass
Overall Test Results					Pass

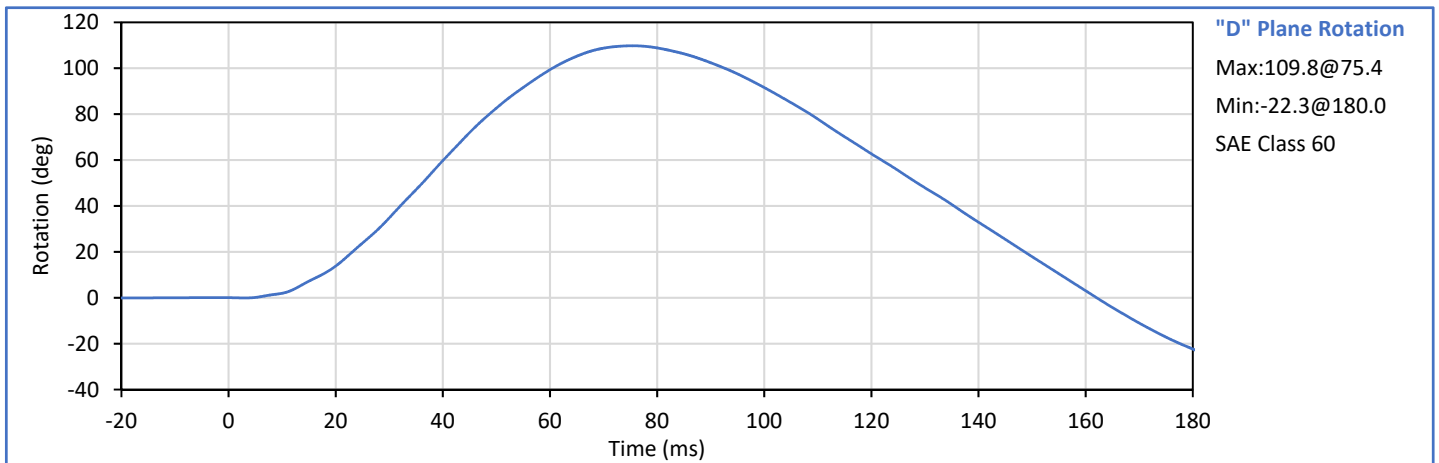
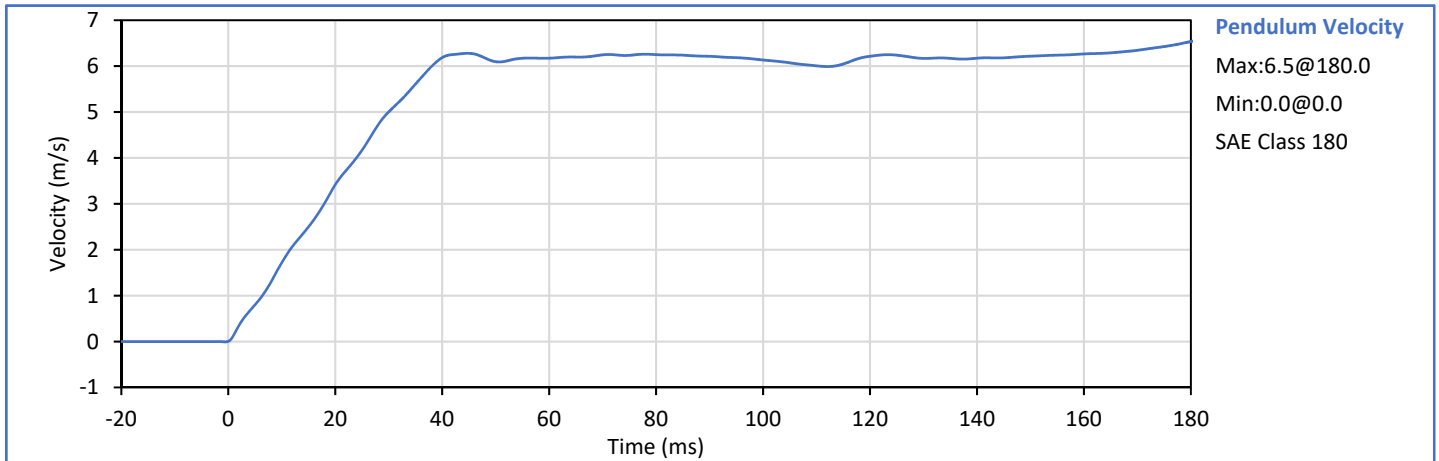



Technician: 
J. Hernandez


Approved By: 
P. Puzzuto

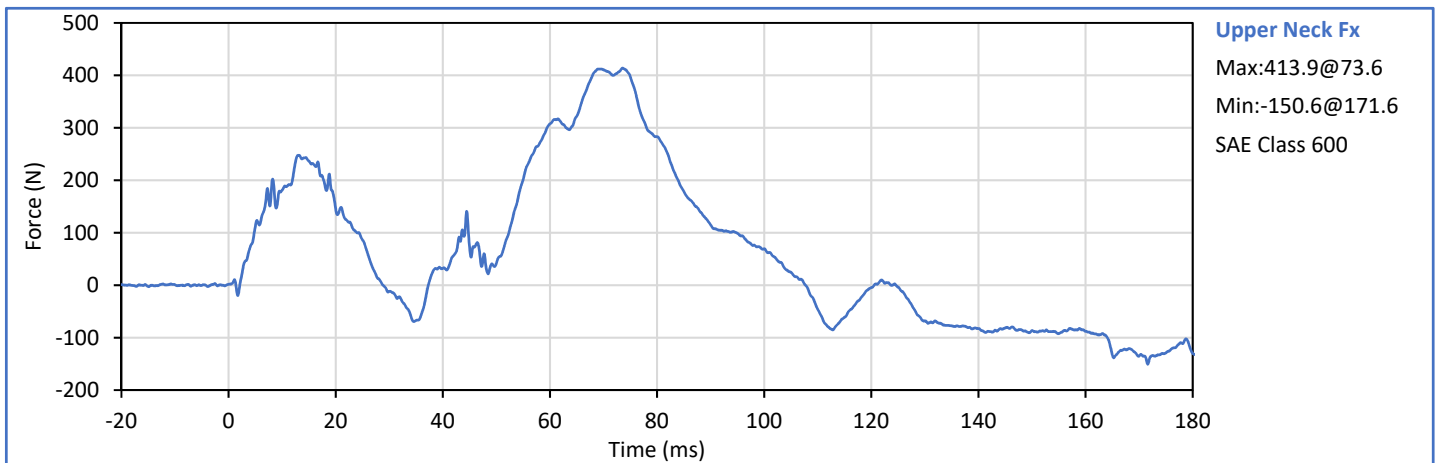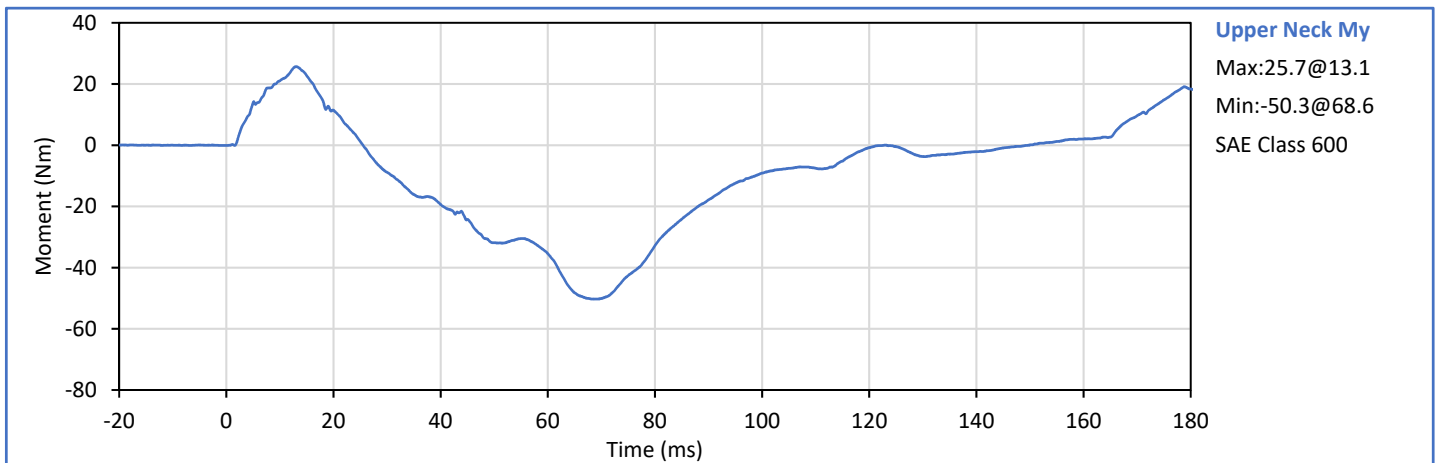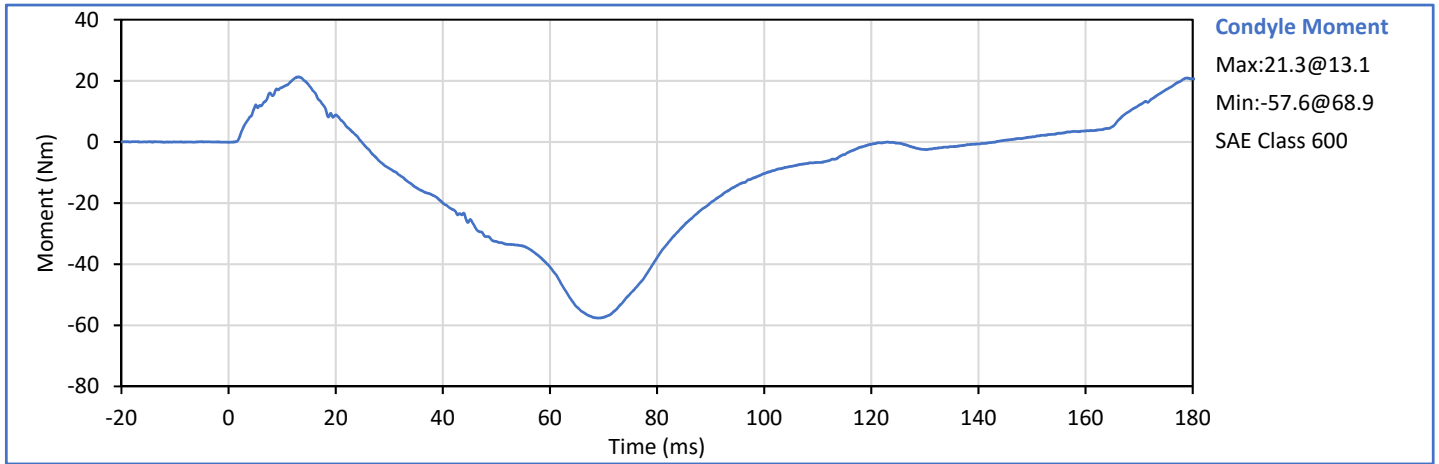



Tested Parameter	Units	Spec. Low	Spec. High	Result	Pass/Fail
Laboratory Temperature	°C	20.6	22.2	21.2	Pass
Laboratory Humidity	%	10	70	30	Pass
Probe Velocity	m/s	6.59	6.83	6.68	Pass
Peak Chest Deflection	mm	50.0	58.0	56.5	Pass
Peak Probe Force, 50 and 58 mm	kN	3.900	4.400	4.270	Pass
Peak Probe Force, 18 and 50 mm	kN	0.000	4.600	3.885	Pass
Internal Hysterisis	%	69.0	85.0	71.9	Pass
Overall Test Results					Pass

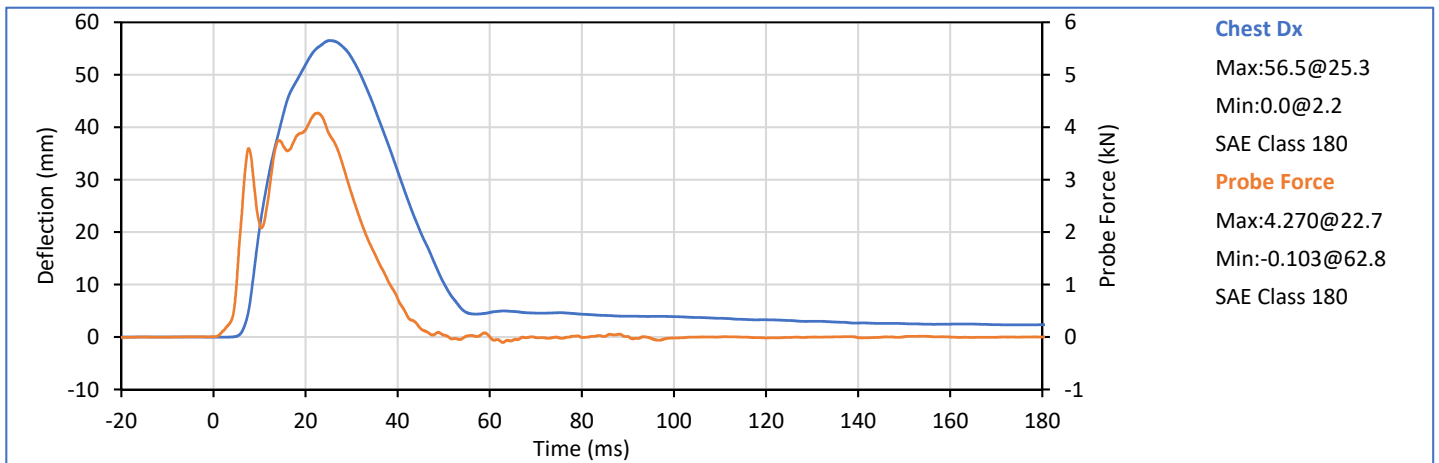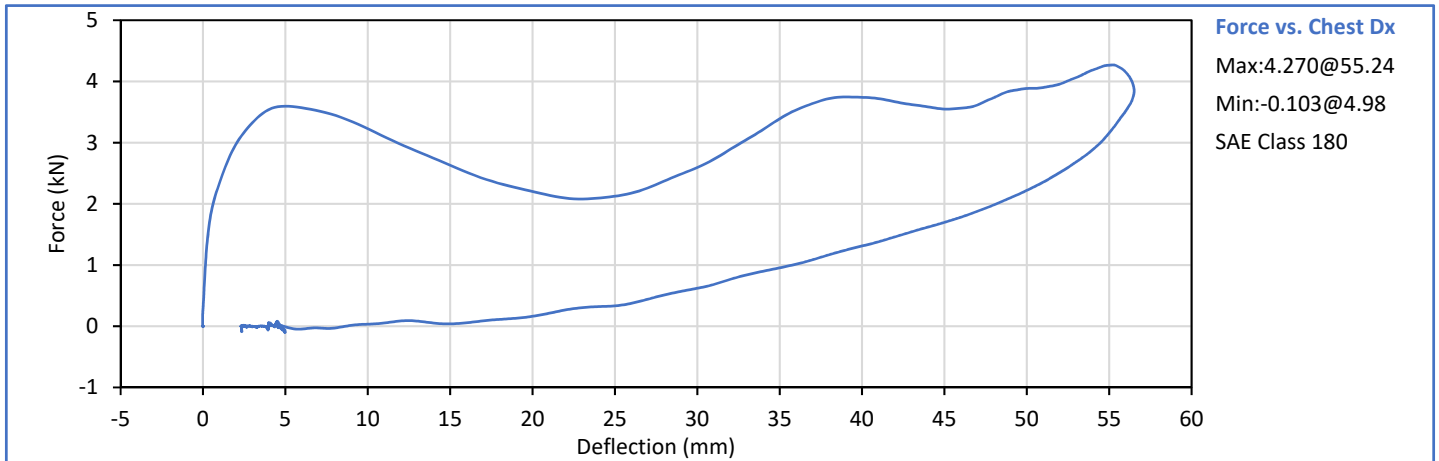



Technician: 
 J. Hernandez

Approved By: 
 P. Puzzuto



Tested Parameter	Units	Spec. Low	Spec. High	Result	Pass/Fail
Laboratory Temperature	°C	18.9	25.6	21.1	Pass
Laboratory Humidity	%	10	70	32	Pass
Orientation Angle	deg	0.0	20.0	13.5	Pass
Test Initial Angle	deg	11.0	19.0	15.4	Pass
Peak Force at 45° (+/-0.5°)	N	320.0	390.0	373.9	Pass
Torso Flexion Rate	deg/s	0.50	1.50	0.83	Pass
Final Reference Plane Angle	deg	-8.0	8.0	4.5	Pass
Overall Test Results					Pass

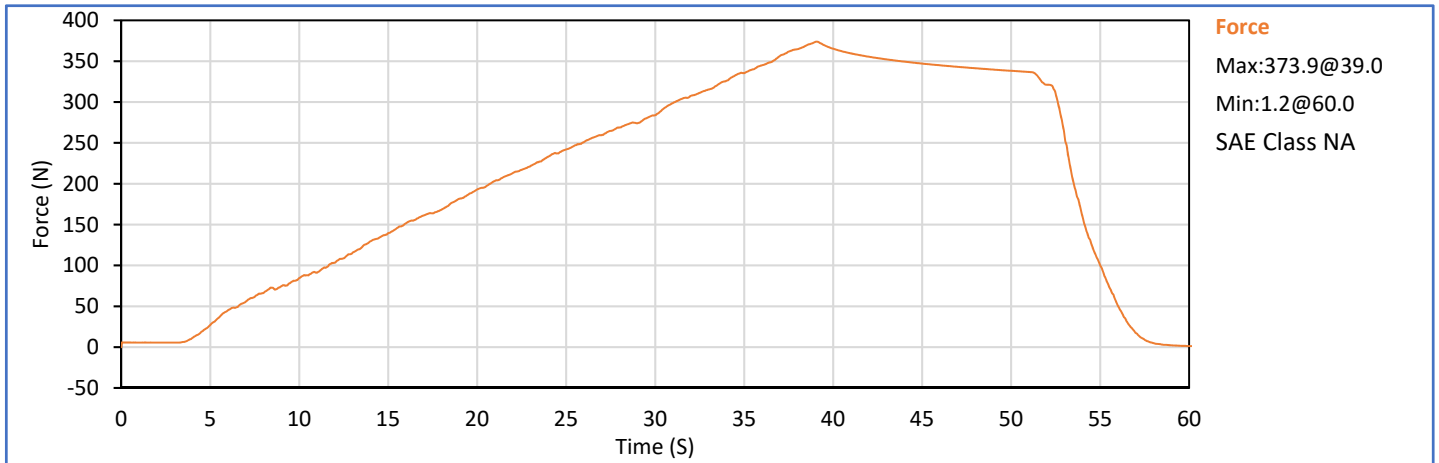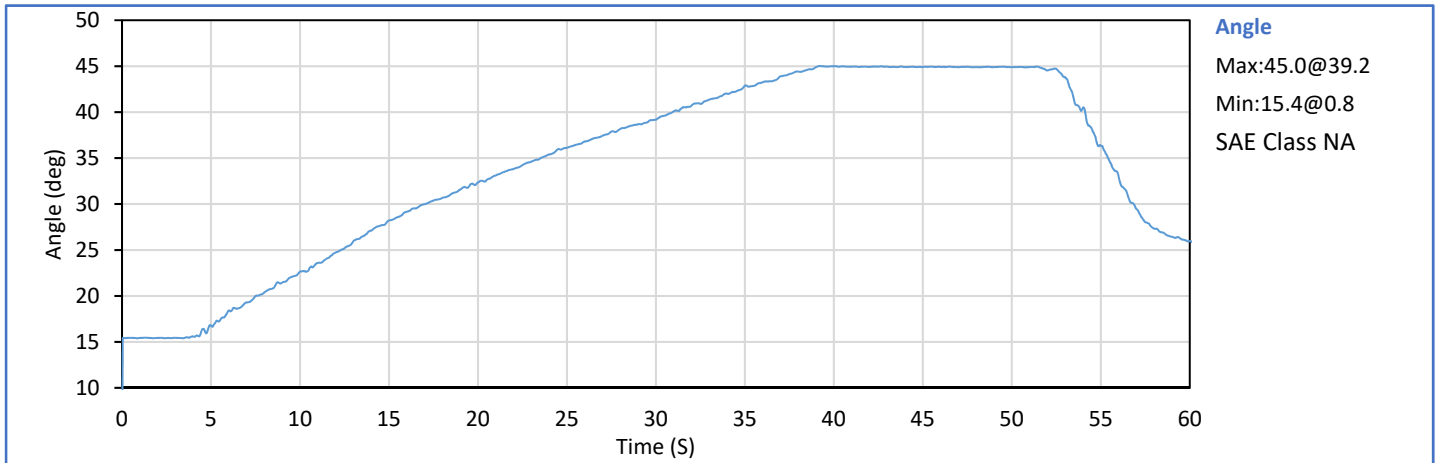



Technician: 
J. Hernandez

Approved By: 
P. Puzzuto

	Tested Parameter	Units	Spec. Low	Spec. High	Result	Pass/Fail
	Laboratory Temperature	°C	18.9	25.6	21.6	Pass
	Laboratory Humidity	%	10	70	34	Pass
Left	Probe Velocity	m/s	2.070	2.130	2.101	Pass
Knee	Peak Resistive Force	N	3450	4060	3617	Pass
Right	Probe Velocity	m/s	2.070	2.130	2.107	Pass
Knee	Peak Resistive Force	N	3450	4060	3455	Pass
Overall Test Results						Pass

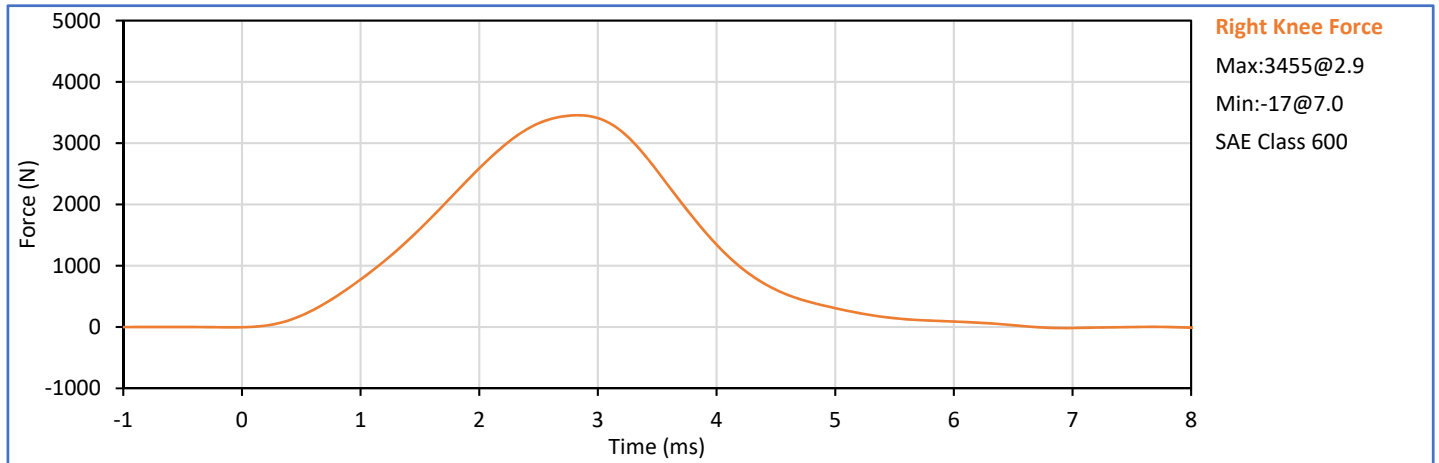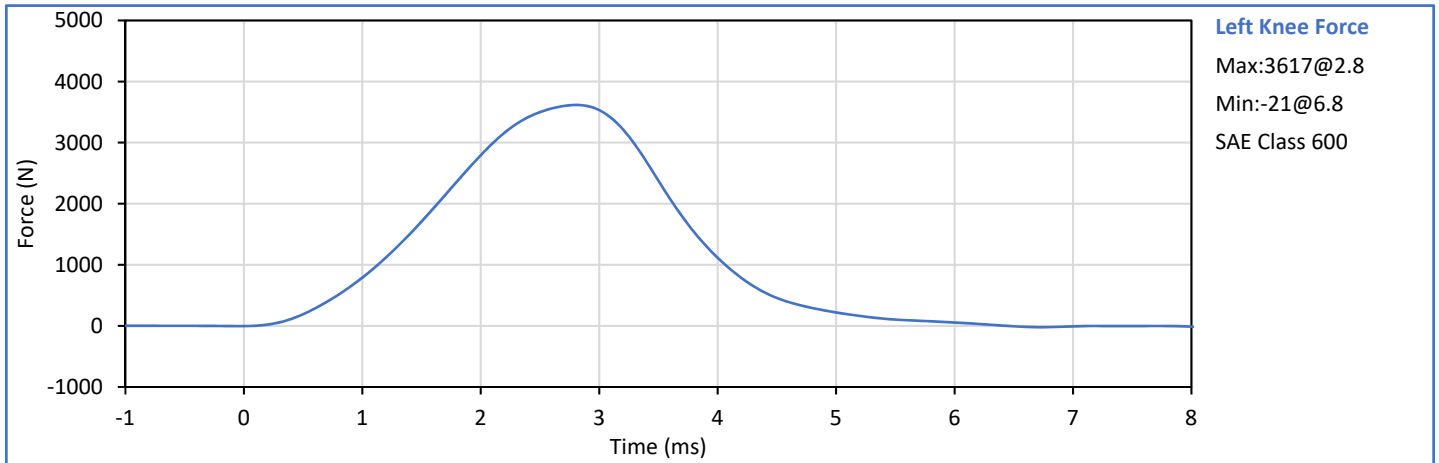

Technician: 
J. Hernandez

Approved By: 
P. Puzzuto