

REPORT NUMBER: NCAP-CAL-20-001

**NEW CAR ASSESSMENT PROGRAM (NCAP)
FRONTAL BARRIER IMPACT TEST**

**FCA US LLC
2020 Jeep Gladiator
Four Door Truck**

NHTSA No: M20200307

**PREPARED BY:
CALSPAN CORPORATION
P.O. BOX 400
BUFFALO, NEW YORK 104625**



December 10, 2019

FINAL REPORT

**PREPARED FOR:
U. S. DEPARTMENT OF TRANSPORTATION
NATIONAL HIGHWAY TRAFFIC SAFETY ADMINISTRATION
OFFICE OF CRASHWORTHINESS STANDARDS
1200 NEW JERSEY AVE SE, ROOM W43-410
WASHINGTON, D.C. 20590**

This final test report was prepared for the U.S. Department of Transportation, National Highway Traffic Administration, in response to Contract Number 693JJ919D000005.

This publication is distributed by the U.S. Department of Transportation, National Highway Traffic Safety Administration, in the interest of information exchange. The opinions, findings and conclusions expressed in this publication are those of the author(s) and not necessarily those of the Department of Transportation or the National Highway Traffic Safety Administration. The United States Government assumes no liability for its contents or use thereof.

If trade or manufacturers' names or products are mentioned it is only because they are considered essential to the object of the publication and should not be construed as an endorsement. The United States Government does not endorse products or manufacturers.

Prepared by: Vanessa Hansen
Vanessa Hansen, Operations Manager

Date: December 10, 2019

Approved by: Edward Dutton
Edward Dutton, Director

Date: December 10, 2019

FINAL REPORT ACCEPTANCE BY OCWS:

Division Chief, New Car Assessment Program
NHTSA, Office of Crashworthiness Standards

Date: _____

COTR, New Car Assessment Program
NHTSA, Office of Crashworthiness Standards

Date: _____

TECHNICAL REPORT DOCUMENTATION PAGE

1. Report No. NCAP-CAL-20-001		2. Government Accession No.		3. Recipient's Catalog No.																																																					
4. Title and Subtitle Final Report of New Car Assessment Program Frontal Impact Testing of a 2020 Jeep Gladiator four door Truck NHTSA No.: M20200307				5. Report Date December 10, 2019																																																					
				6. Performing Organization Code CAL																																																					
7. Author(s) Vanessa Walsh, Operations Manager Edward Dutton, Director				8. Performing Organization Report No. CAL-DOT-2020-001																																																					
9. Performing Organization Name and Address Calspan Corporation Transportation Test Operations P.O. Box 400 Buffalo, New York 104625				10. Work Unit No.																																																					
				11. Contract or Grant No. 693JJ919D000005																																																					
12. Sponsoring Agency Name and Address U.S. Department of Transportation National Highway Traffic Safety Administration Office of Crashworthiness Standards 1200 New Jersey Ave., SE, Room W43-410 Washington, D.C. 20590				13. Type of Report and Period Covered: Final Test Report October 25, 2019 - December 10, 2019																																																					
				14. Sponsoring Agency Code NVS-111																																																					
15. Supplementary Notes																																																									
16. Abstract A 56.30 km/h (35 mph), NCAP frontal rigid barrier impact test was conducted on a 2020 Jeep Gladiator four door Truck in accordance with the specifications of the Office of Crashworthiness Standards Laboratory Procedure for NCAP Full Frontal Rigid Barrier Impact Testing. This test was conducted to obtain data related to FMVSS Nos. 208, 212, 219 (partial), 301, and 305 performance. The test was conducted at Calspan Corporation's Transportation Test Operations facility in Buffalo, New York on October 25, 2019. The impact velocity of the vehicle was 56.18 km/h, and the ambient temperature at the barrier face at the time of impact was 21°C. The target vehicle post-test maximum crush was 415 mm at C3 to the left side of the front bumper. The test vehicle's occupant performance data is as follows:																																																									
<table border="1"> <thead> <tr> <th rowspan="2">Measurement Description</th> <th rowspan="2">Units</th> <th colspan="2">Driver ATD (Serial No. 142)</th> <th colspan="2">Passenger ATD (Serial No. 140)</th> </tr> <tr> <th>Threshold</th> <th>Result</th> <th>Threshold</th> <th>Result</th> </tr> </thead> <tbody> <tr> <td>Head Injury Criteria (HIC₁₅)</td> <td></td> <td>700</td> <td>219.533</td> <td>700</td> <td>179.847</td> </tr> <tr> <td>Maximum Chest Compression</td> <td>mm</td> <td>63</td> <td>-27.290</td> <td>52</td> <td>-17.792</td> </tr> <tr> <td>Nij</td> <td></td> <td>1</td> <td>0.349</td> <td>1</td> <td>0.301</td> </tr> <tr> <td>Neck Tension</td> <td>N</td> <td>4,170</td> <td>1298.864</td> <td>2,620</td> <td>1081.393</td> </tr> <tr> <td>Neck Compression</td> <td>N</td> <td>4,000</td> <td>-403.396</td> <td>2,520</td> <td>-373.596</td> </tr> <tr> <td>Left Femur Force</td> <td>N</td> <td>10,008</td> <td>-2563.801</td> <td>6,805</td> <td>-1227.137</td> </tr> <tr> <td>Right Femur Force</td> <td>N</td> <td>10,008</td> <td>-3145.935</td> <td>6,805</td> <td>-1515.045</td> </tr> </tbody> </table>						Measurement Description	Units	Driver ATD (Serial No. 142)		Passenger ATD (Serial No. 140)		Threshold	Result	Threshold	Result	Head Injury Criteria (HIC ₁₅)		700	219.533	700	179.847	Maximum Chest Compression	mm	63	-27.290	52	-17.792	Nij		1	0.349	1	0.301	Neck Tension	N	4,170	1298.864	2,620	1081.393	Neck Compression	N	4,000	-403.396	2,520	-373.596	Left Femur Force	N	10,008	-2563.801	6,805	-1227.137	Right Femur Force	N	10,008	-3145.935	6,805	-1515.045
Measurement Description	Units	Driver ATD (Serial No. 142)		Passenger ATD (Serial No. 140)																																																					
		Threshold	Result	Threshold	Result																																																				
Head Injury Criteria (HIC ₁₅)		700	219.533	700	179.847																																																				
Maximum Chest Compression	mm	63	-27.290	52	-17.792																																																				
Nij		1	0.349	1	0.301																																																				
Neck Tension	N	4,170	1298.864	2,620	1081.393																																																				
Neck Compression	N	4,000	-403.396	2,520	-373.596																																																				
Left Femur Force	N	10,008	-2563.801	6,805	-1227.137																																																				
Right Femur Force	N	10,008	-3145.935	6,805	-1515.045																																																				
17. Key Words 56.3 km/h (35 mph) Full Frontal Rigid Barrier Impact Test New Car Assessment Program (NCAP)				18. Distribution Statement Copies of this report are available from: National Highway Traffic Safety Administration Technical Information Services Division, NPO-411 1200 New Jersey Ave, SE Washington, DC 20590																																																					
19. Security Class. (of this report) UNCLASSIFIED		20. Security Class. (of this page) UNCLASSIFIED		21. No. of Pages 169	22. Price																																																				

TABLE OF CONTENTS

<u>Section</u>		<u>Page</u>
1	Purpose and Summary of the Test	1-1
2	Occupant and Vehicle Information / Data Sheets	2-1
<u>Data Sheet</u>		<u>Page</u>
1	General Test and Vehicle Parameter Data	2-2
2	Seat Adjustment, Fuel System, and Steering Wheel Data	2-6
3	Dummy Longitudinal Clearance Dimensions	2-8
4	Dummy Lateral Clearance Dimensions	2-9
5	Seat Belt Positioning Data	2-10
6	High-Speed Camera Locations and Data	2-11
7	Vehicle Accelerometer Locations	2-13
8	Photographic Reference Target Locations	2-14
9	Load Cell Locations on Fixed Barrier	2-15
10	Test Vehicle Summary of Results	2-16
11	Post-Test Observations	2-17
12	Vehicle Profile Measurements	2-18
13	Accident Investigation Division Data	2-20
14	Vehicle Intrusion Measurements	2-21
15	Summary of Indicant FMVSS No.212 and FMVSS No.219 (Partial) Data	2-23
16	FMVSS 301 Barrier Impact & Static Rollover Results	2-25
17	Dummy/Vehicle Temperature Stabilization Chart	2-26
<u>Appendix</u>		<u>Page</u>
A	Photographs	A-1
B	Dummy Response Data Traces	B-1
C	Dummy Calibration and Performance Verification Data	C-1
D	Test Equipment and Instrumentation Calibration	D-1

SECTION 1

PURPOSE AND SUMMARY OF TEST

PURPOSE

This 56.3 km/h frontal barrier impact test is part of the Vehicle Barrier Impact Testing Program sponsored by the National Highway Traffic Safety Administration (NHTSA) under Contract No. 693JJ919D000005. The purpose of this test was to obtain vehicle crashworthiness and occupant restraint system performance data for consumer information purposes.

The 56.3 km/h frontal barrier impact test was conducted in accordance with the Office of Crashworthiness Standards Laboratory Procedure for NCAP Full Frontal Rigid Barrier Impact Testing.

SUMMARY

A load cell barrier consisting of 128 load cells was impacted by a 2020 Jeep Gladiator four door Truck at a velocity of 56.18 km/h. The test was performed at Calspan Corporation's Transportation Test Operations facility in Buffalo, New York on October 25, 2019. Pre- and post-test photographs of the vehicle and dummies to document the test can be found in Appendix A. One real-time camera and 16 high-speed cameras were used to document the frontal barrier impact event. Camera locations and other pertinent camera information can be found in Data Sheet 6 of this report.

One Part 572E, 50th percentile male anthropomorphic test device (ATD), was placed in the driver seating position and one Part 572O 5th percentile female ATD was placed in the right-front passenger seating position according to dummy placement instructions specified in the Laboratory Procedure for NCAP Full Frontal Rigid Barrier Impact Testing. Both ATDs were fully instrumented with head, chest and pelvis tri-axial accelerometers, chest displacement potentiometers, upper neck transducers, femur load cells, and lower leg instrumentation. Seat belt load cells were installed on the driver's and passenger's lap and shoulder belts to measure dummy torso and pelvic section loading. The driver (position 1) ATD (Serial No. 142) and the right-front passenger (position 2) ATD (Serial No. 140) were qualified prior to this test. Certification details, along with instrumentation calibration data, can be found in Appendix C of this report.

The 486 channels of data were recorded on an on-board data acquisition system. Appendix B contains the vehicle, load cell barrier and dummy response data traces.

There was 100 percent windshield retention and no intrusion into the protected zone of the windshield during the event. There was a total of 0.0 grams of stoddard solvent leakage after the event or during any phase of the static rollover. The maximum static crush of the vehicle was 415 mm and both driver and passenger side doors remained closed during the impact event and were operable after the impact.

The driver's visible contact points were as follows: The driver's head contacted the frontal airbag and then the head restraint. The upper torso contacted the frontal airbag. Both knees contacted the knee bolster.

The passenger's visible contact points were as follows: The passenger's head contacted the frontal airbag and then the head restraint. The upper torso contacted the frontal airbag. Both knees contacted the knee bolster.

The occupant data is summarized below.

ATD Position	HIC ₁₅	Nij	Neck Tension (N)	Neck Comp. (N)	3ms Chest Clip (Gs)	Chest Disp. (mm)	Left Femur (N)	Right Femur (N)
Driver (50 th)	219.533	0.349	1298.864	-403.396	50.990	-27.290	-2563.801	-3145.935
Passenger (5 th)	179.847	0.301	1081.393	-373.596	42.445	-17.792	-1227.137	-1515.045

GENERAL COMMENTS:

1. P1 (Driver) serial number - 142
2. P2 (Passenger) serial number - 140

Data Anomalies:

- Left Rear Seat Cross Member X Redundant Acceleration, Questionable data throughout
- Right Rear Seat Cross Member X Redundant Acceleration, Questionable data after 71.8ms
- Right Rear Seat Cross Member Z Acceleration, Exceeded calibration range at 72 ms

SECTION 2

OCCUPANT AND VEHICLE INFORMATION / DATA SHEETS

This section contains information reporting for the following Data Sheets:

Data Sheet No. 1 – General Test and Vehicle Parameter Data

Data Sheet No. 2 – Seat Adjustment, Fuel System, and Steering Wheel Data

Data Sheet No. 3 – Dummy Longitudinal Clearance Dimensions

Data Sheet No. 4 – Dummy Lateral Clearance Dimensions

Data Sheet No. 5 – Seat Belt Positioning Data

Data Sheet No. 6 – High-Speed Camera Locations and Data

Data Sheet No. 7 – Vehicle Accelerometer Locations

Data Sheet No. 8 – Photographic Reference Target Locations

Data Sheet No. 9 – Load Cell Locations on Fixed Barrier

Data Sheet No. 10 – Test Vehicle Summary of Results

Data Sheet No. 11 – Post-Test Observations

Data Sheet No. 12 – Vehicle Profile Measurements

Data Sheet No. 13 – Accident Investigation Division Data

Data Sheet No. 14 – Vehicle Intrusion Measurements

Data Sheet No. 15 – Summary of Indicant FMVSS No. 212 and FMVSS No. 219 (Partial)

Data Sheet No. 16 – FMVSS 301 Barrier Impact and Static Rollover Results

Data Sheet No. 17 – Dummy/Vehicle Temperature Stabilization Chart

**DATA SHEET NO. 1
GENERAL TEST AND VEHICLE PARAMETER DATA**

Test Vehicle: 2020 Jeep Gladiator four door Truck
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20200307
 Test Date: 10/25/2019

TEST VEHICLE INFORMATION AND OPTIONS

NHTSA No.	M20200307	Traction Control System (TCS)	Yes
Model Year	2020	Power Steering	Yes
Make	Jeep	Power Window Auto-Reverse	No
Model	Gladiator	Driver Frontal Airbag	Yes
Body Style	Truck	Driver Curtain Airbag	No
VIN	1C6JJTAG6LL143639	Driver Head/Torso Airbag	Yes
Body Color	Gray	Driver Torso Airbag	No
Odometer Reading (km /mi)	41 miles	Driver Torso/Pelvis Airbag	No
Engine Displacement (L)	3.6	Driver Pelvis Airbag	No
Type / No. Cylinders	V6	Driver Knee Airbag	No
Engine Placement	Inline	Front Pass. Frontal Airbag	Yes
Transmission Type	Manual	Front Pass. Curtain Airbag	No
Transmission Speeds	6-Speed	Front Pass. Head/Torso Airbag	Yes
Overdrive	Yes	Front Pass. Torso Airbag	No
Final Drive	4x4	Front Pass. Torso/Pelvis Airbag	No
Roof Rack	No	Front Pass. Pelvis Airbag	No
Sunroof / T-Top	Yes	Front Pass. Knee Airbag	No
Running Boards	No	Driver Pretensioner	Yes
Tilt Steering Wheel	Yes	Driver Load Limiter	Yes
Power Seats	No	Front Pass. Pretensioner	Yes
Anti-Lock Brakes (ABS)	Yes	Front Pass. Load Limiter	Yes
Automatic Door Locks (ADLs)	No	Other –	-

Does owner's manual provide instructions to turn off automatic door locks?

N/A

DATA FROM CERTIFICATION LABEL

Manufactured By	FCA US LLC	GVWR (kg)	2835
Date of Manufacture	8-19	GAWR Front (kg)	1407
		GAWR Rear (kg)	1701

VEHICLE SEATING AND WEIGHT CAPACITY DATA


Measured Parameter	Front	Rear	Third	Total
Type of Seats	Bucket	Bench	N/A	
Number of Occupants	2	3	N/A	5
Capacity Wt. (VCW) (kg)				749
Cargo Wt. (RCLW) (kg)				136

DATA SHEET NO. 1 ... (CONTINUED)
GENERAL TEST AND VEHICLE PARAMETER DATA

Test Vehicle: 2020 Jeep Gladiator four door Truck
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20200307
 Test Date: 10/25/2019

Collect items circled in red, tire manufacturer, and tire name.

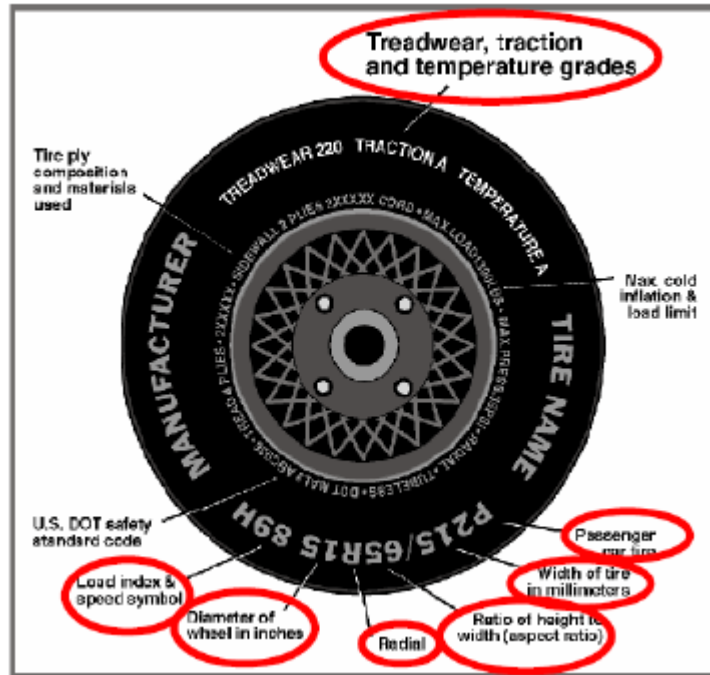

VEHICLE TIRE INFORMATION

Measured Parameter	Front	Rear
Maximum Tire Pressure (kPa)	300	300
Cold Pressure (kPa)	250	250
Recommended Tire Size	245/75R17	245/75R17
Tire Size on Vehicle	245/75R17	245/75R17
Tire Manufacturer	Bridgestone	Bridgestone
Tire Model	Dueler H/T	Dueler H/T
Treadwear	520	520
Traction	B	B
Temperature Grades	B	B
Tire Plies Sidewall	2 Polyester	2 Polyester
Tire Plies Body	2 Polyester, 2 Steel, 1 Polyester	2 Polyester, 2 Steel, 1 Polyester
Load Index / Speed Symbol	112T	112T
Tire Material	Rubber	Rubber
DOT Safety Code Left	9BM1DHV2619	9BM1DHV2619
DOT Safety Code Right	9BM1DHV2619	9BM1DHV2619

DATA SHEET NO. 1 ... (CONTINUED)
GENERAL TEST AND VEHICLE PARAMETER DATA

Test Vehicle: 2020 Jeep Gladiator four door Truck
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20200307
 Test Date: 10/25/2019

TEST VEHICLE WEIGHTS

	Units	As Delivered Weights (UVW)			As Tested Weights (ATW)		
		Front Axle	Rear Axle	Total	Front Axle	Rear Axle	Total
Left	kg	546.5	464.5		586	563.5	
Right	kg	561.5	490.5		594.5	590	
Ratio	%	53.7	46.3		50.6	49.4	
Totals	kg	1108	955	2063	1180.5	1153.5	2334

TARGET TEST WEIGHT CALCULATION

Measured Parameter	Units	Value	
Total Delivered Weight (UVW)	kg	2063	(A)
Weight of 1 P572E ATD & 1 P572O ATD	kg	142	(B)
Rated Cargo / Luggage Weight (RCLW)	kg	136	(C)
Calculated Vehicle Target Weight (TVTW)	kg	2341	(A+B+C)

TEST VEHICLE ATTITUDES AND CG

Condition	Units	LF	RF	LR	RR	CG (aft of front axle)
As Delivered	mm	990	935	981	981	1614
As Tested	mm	928	921	954	943	1723
Post-Test	mm	898	925	947	960	

GENERAL TEST VEHICLE DATA

Measurement Description	Units	Value
Total Vehicle Wheel Base	mm	3487
Total Vehicle Length at Left Side	mm	5461
Total Vehicle Length at Centerline	mm	5490
Total Vehicle Length at Right Side	mm	5461
Weight of Ballast in Cargo Area	kg	63.5
Weight of Vehicle Components Removed	kg	11
Amount of Stoddard Solvent in Fuel Tank	L	77.4

LIST OF COMPONENTS REMOVED TO MEET TEST WEIGHT:

Rear bumper

DATA SHEET NO.1 ... (CONTINUED)
GENERAL TEST AND VEHICLE PARAMETER DATA

Test Vehicle: 2020 Jeep Gladiator four door Truck
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20200307
 Test Date: 10/25/2019

TARGET VEHICLE STRUCTURAL MEASUREMENT

No.	Description	Pre-Test
1	Total Length	5490
2	Total Width	1676
3*	Bumper Top Height	638
4*	Bumper Bottom Height	552
5*	Longitudinal Member Top Height	657
6	Distance Between Longitudinal Members	842
7	Longitudinal Member Width	61
8*	Engine Top Height	1167
9*	Engine Bottom Height	344
10	Engine and Gearbox Width	453
11	Front Bumper-Engine Distance	790
12*	Front Shock Absorber Fixing Height	860
13*	Bonnet Leading Edge Height	1117
14	Front Shock Absorber Fixing Width	993
15	Front Bumper – Front Axle Distance	722
16	Front Axle – A Pillar Distance	936
17	A-Pillar – B-Pillar Distance	951
18	B-Pillar – Rear Axle Distance	1598
19	B-Pillar – C-Pillar Distance	786
20*	Roof Sill Bottom Height	1704
21*	Roof Sill Top Height	1765
22*	Floor Sill Bottom Height	532
23*	Floor Sill Top Height	624

*Height Measurements are taken from the ground
 Note: All measurements are in millimeters


DATA SHEET NO. 2
SEAT ADJUSTMENT, FUEL SYSTEM, AND STEERING WHEEL DATA

Test Vehicle: 2020 Jeep Gladiator four door Truck
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20200307
 Test Date: 10/25/2019

NOMINAL DESIGN RIDING POSITION

The driver's seat back was set to the manufacturer's designated angle. The passenger's seat back was positioned in a similar manner as the driver's seat back. Seat back angles are measured at the headrest post bezel using a digital inclinometer.

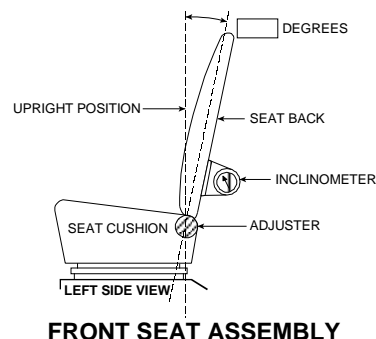

Seating Position	Degrees
Driver Seat Back Angle	5.2
Passenger Seat Back Angle	-1.4

SEAT FORE / AFT POSITIONS


The driver's seat was positioned at the mid-point of fore/aft travel at its lowest position. The passenger's seat was positioned at the most forward position of fore/aft travel. Zero is defined as the forward most position.

Seating Position	Total Fore / Aft Travel	Placed in Position #
Driver Seat	250 (0-30)	125 (Detent 12)
Passenger Seat	190 (0-28)	0

SEAT BELT UPPER ANCHORAGE

The driver's seat belt anchorage was positioned according to the manufacturer's designated positioning for a 50th percentile adult male ATD. The passenger's seat belt anchorage was positioned according to the manufacturer's designated positioning for a 5th percentile adult female ATD. For this test zero is defined as the uppermost position.

Seating Position	Total # of Positions	Placed in Position #
Driver Seat	5	0
Passenger Seat	5	0

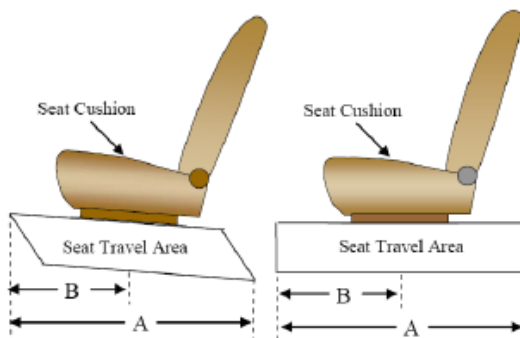

DATA SHEET NO. 2 ... (CONTINUED)
SEAT ADJUSTMENT, FUEL SYSTEM, AND STEERING WHEEL DATA

Test Vehicle: 2020 Jeep Gladiator four door Truck
 Test Program: NCAP Frontal Barrier Impact Test


NHTSA No.: M20200307
 Test Date: 10/25/2019

FUEL TANK CAPACITY

Description	Liters
Usable Capacity of "Standard Tank"	83.27
Usable Capacity of "Optional Tank"	N/A
92%-94% of Usable Capacity	76.6 – 78.3
Actual Amount of Solvent Used	77.4
1/3 of Usable Capacity	27.7


FUEL PUMP

The vehicle is equipped with an electric fuel pump. The fuel filler neck is on the left side of the vehicle. The pump creates positive pressure in the fuel lines, pushing the gasoline to the engine. See form 1 for more information.

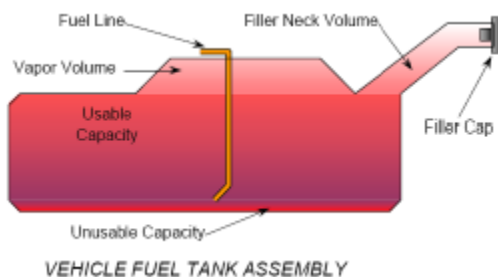

STEERING COLUMN ADJUSTMENT

Steering wheel and column adjustments are made so that the steering wheel hub is at the geometric center of the locus it describes when moved through its full range of motion. For angular measurements, a digital inclinometer was used to measure a plate which was placed across the steering wheel rim. A tape measure was used to measure the telescoping steering wheel travel.

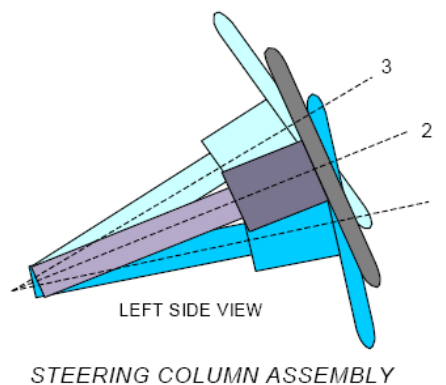


STEERING COLUMN POSITIONS

Description	Degrees	Fore / Aft Position (mm)
Lowermost position No. 1	18.7	
Geometric center position No. 2	21.5	
Uppermost position No. 3	24.3	
Telescoping Steering Wheel Travel		35
Test Position	21.5	17

**DATA SHEET NO. 3
DUMMY LONGITUDINAL CLEARANCE DIMENSIONS**

Test Vehicle: 2020 Jeep Gladiator four door Truck
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20200307
 Test Date: 10/25/2019

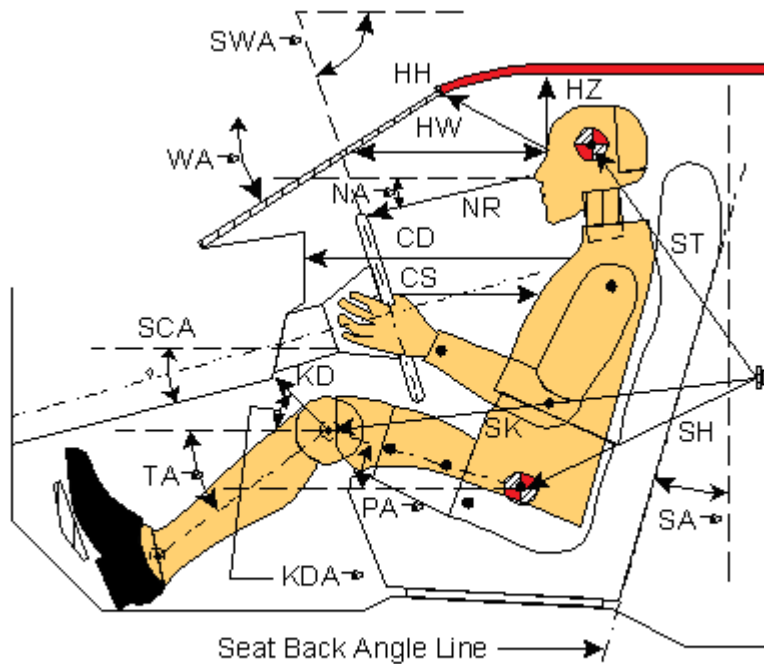


Left Side View

Code	Measurement Description	Driver (SN: 142)		Passenger (SN: 140)	
		Length (mm)	Angle (°)	Length (mm)	Angle (°)
WA°	Windshield Angle		35.1		
SWA°	Steering Wheel Angle		20.7		
SCA°	Steering Column Angle		69.3		
SA°	Seat Back Angle (on headrest post)		5.2		-1.4
HZ	Head to Roof (Z)	271	90	364	90
HH	Head to Header	505	17.2	434	31.2
HW	Head to Windshield	607	0	550	0
NR	Nose to Rim / Dash	392	9.9	425	7.8
CD	Chest to Dash	518		343	
CS	Chest to Steering Hub	292	5.3		
RA	Rim to Abdomen	180	0		
KDL	Left Knee to Dash	143	23.4	94	26.2
KDR	Right Knee to Dash	147	20.2	104	25.8
PA°	Pelvic Angle		22.9		19.0
TA°	Tibia Angle		39.0		46.9
SK	Striker to Knee	614	-1.7	672	-0.5
ST	Striker to Head	602	9.8	563	67.4
SH	Striker to H-Point	238	14.4	342	-8.2

DATA SHEET NO. 4
DUMMY LATERAL CLEARANCE DIMENSIONS

Test Vehicle: 2020 Jeep Gladiator four door Truck
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20200307
 Test Date: 10/25/2019

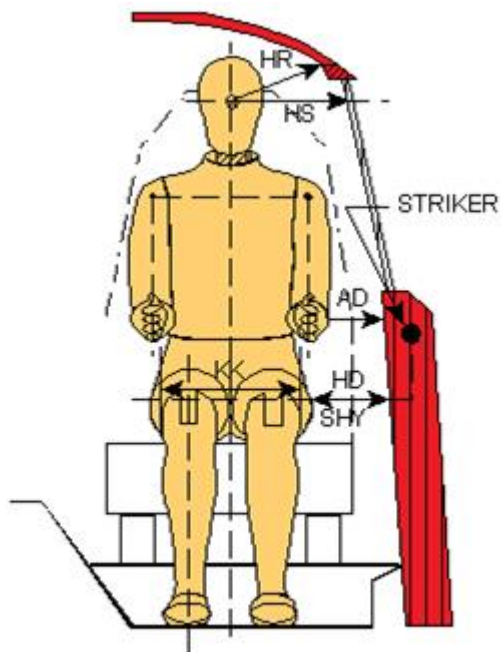


Front View

Code	Description	Driver (mm)	Passenger (mm)
AD	Arm to Door	21	47
HD	H-Point to Door	121	159
HR	Head to Side Header	239	289
HS	Head to Side Window	358	364
KK	Knee to Knee	270	210
SHY	Striker to H-Point (Y Direction)	160	180
AA	Ankle to Ankle	195	154

**DATA SHEET NO. 5
SEAT BELT POSITIONING DATA**

Test Vehicle: 2020 Jeep Gladiator four door Truck
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20200307
 Test Date: 10/25/2019

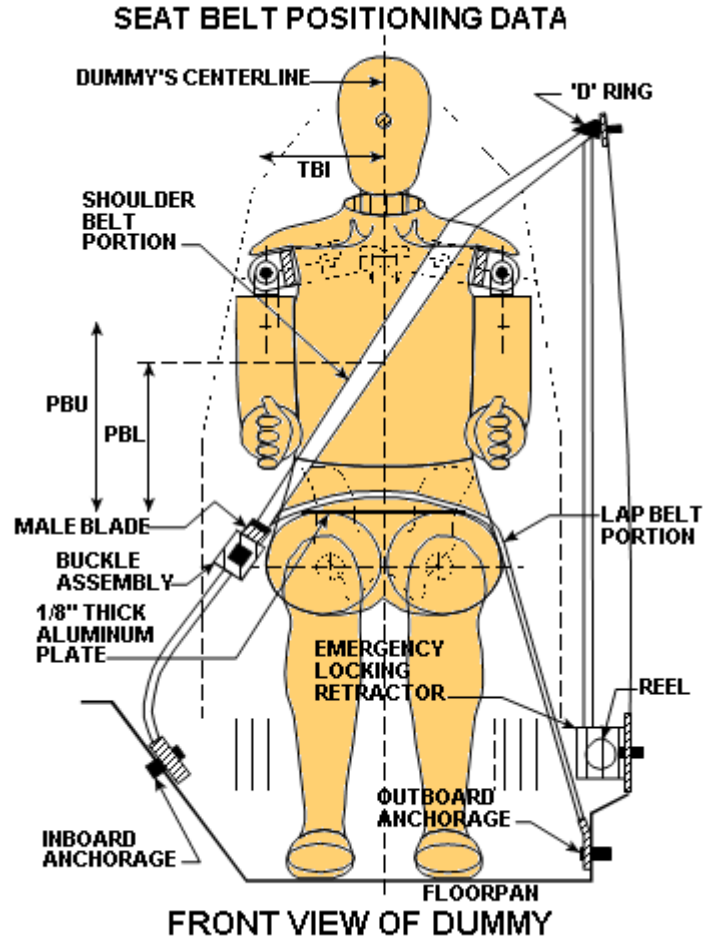

SEAT BELT POSITIONING MEASUREMENTS

Measurement Description	Units	Driver	Passenger
PBU — Top surface of reference to belt upper edge	mm	370	295
PBL — Top surface of reference to belt lower edge	mm	295	220

BELT LENGTH DATA


Measurement Description	Units	Driver	Passenger
Shoulder belt length as measured on ATD	mm	795	845
Lap Belt Length as measured on ATD	mm	660	675
Remainder of belt on reel	mm	945	980
Total belt length for continuous webbing systems	mm	2400	2500

**DATA SHEET NO. 6
HIGH-SPEED CAMERA LOCATIONS AND DATA**

Test Vehicle: 2020 Jeep Gladiator four door Truck
Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20200307
Test Date: 10/25/2019

CAMERA POSITIONS FOR FRONTAL IMPACTS

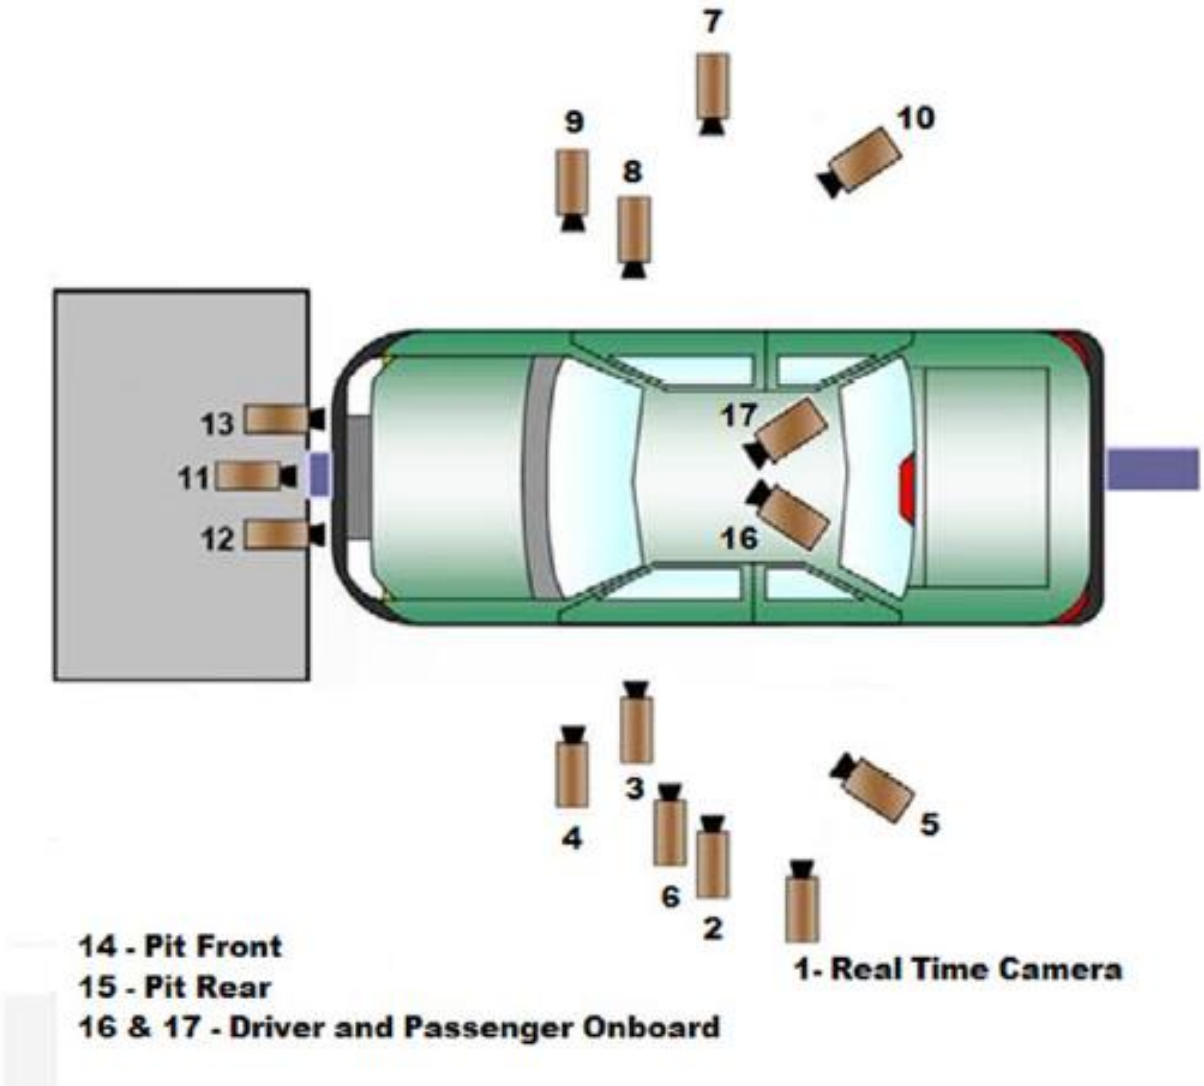

DATA SHEET NO. 6 ... (CONTINUED)
HIGH-SPEED CAMERA LOCATIONS AND DATA

Test Vehicle: 2020 Jeep Gladiator four door Truck
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20200307
 Test Date: 10/25/2019

CAMERA LOCATIONS



No.	Camera View	Location (mm)			Lens (mm)	Speed (fps)
		X	Y	Z		
1	Real-Time Left Overall	-	-	-		60
2	Left Overall	-2033	-7960	-1277	24	1000
3	Driver Close-Up	-1372	-6817	-1548	50	1000
4	Left Front Half	-633	-6748	-1236	28	1000
5	Left Angle	-4197	-4498	-2177	50	1000
6	Steering Column	-1504	-7460	-1969	50	1000
7	Right Overall	-2245	7957	-1324	24	1000
8	Passenger Close-Up	-1291	6757	-1434	50	1000
9	Right Front Half	-767	5734	-1345	28	1000
10	Right Angle	-4238	4394	-2185	50	1000
11	Windshield	1230	0	-3471	24	1000
12	Driver Windshield	800	400	-2265	25	1000
13	Passenger Windshield	800	-400	-2265	25	1000
14	Pit Front	-1204	0	2678	12.5	1000
15	Pit Rear	-2436	0	2678	12.5	1000
16	Onboard Driver Airbag (Optional)				8	1000
17	Onboard Passenger Airbag (Optional)				8	1000

* COORDINATES: +X = forward of impact plane
 +Y = right of monorail center
 +Z = into ground

DATA SHEET NO. 7
VEHICLE ACCELEROMETER LOCATIONS

Test Vehicle: 2020 Jeep Gladiator four door Truck
Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20200307
Test Date: 10/25/2019

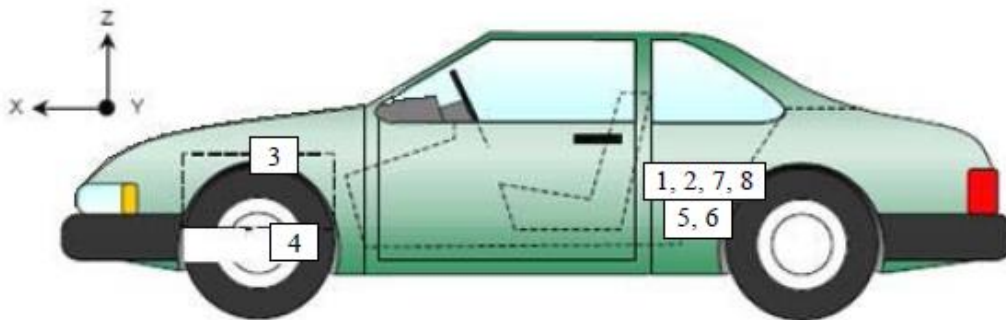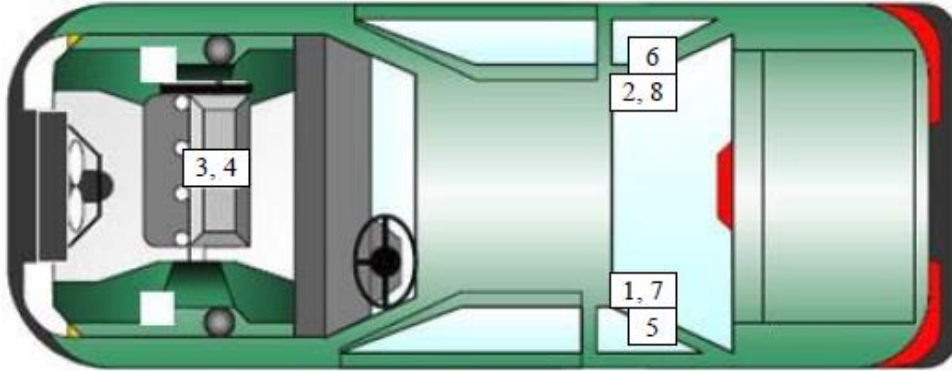

VEHICLE ACCELEROMETER PRE-TEST LOCATIONS

No.	Accelerometer Location	Measurements (mm)		
		X	Y	Z
1	Left Rear Accelerometer – X Direction	2571	-252	-47
2	Right Rear Accelerometer – X Direction	2564	351	-36
3	Engine Top X	4551	-58	-629
4	Engine Bottom X	5048	7	248
5	Left Rear Accelerometer – Z Direction	2571	-252	-47
6	Right Rear Accelerometer – Z Direction	2564	351	-36
7	Left Rear Accelerometer – X Direction Redundant	2573	-265	-47
8	Right Rear Accelerometer – X Direction Redundant	2563	365	-37

Reference Points: X – Rear Surface of Vehicle (+ forward)
Y – Vehicle Centerline (+ to right)
Z – Ground Plane (+ down)


DATA SHEET NO. 8
PHOTOGRAPHIC REFERENCE TARGET LOCATIONS

Test Vehicle: 2020 Jeep Gladiator four door Truck
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20200307
 Test Date: 10/25/2019

Item	Value
A	734
B	838
C	2261
D	614
E	2616
F	360
G	1874
H	1879
I	1506
J	977
K	982
L	2025
M	1899
N	2028
O	974
P	981
Q	1507

All units in millimeters

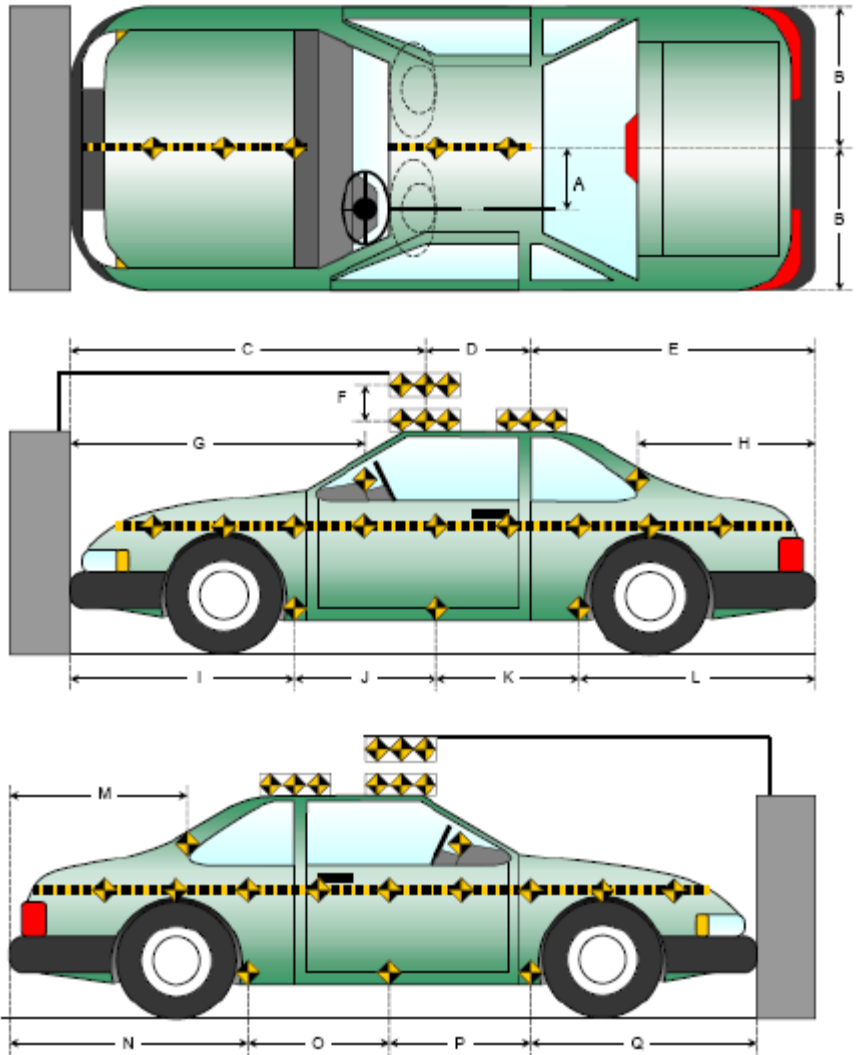

Note: Since no roof target could be used, cloth targets were placed on the Driver side at 614mm apart and 734 mm from the centerline of the vehicle.

DATA SHEET NO. 9
LOAD CELL LOCATIONS ON FIXED BARRIER

Test Vehicle: 2020 Jeep Gladiator four door Truck
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20200307
 Test Date: 10/25/2019

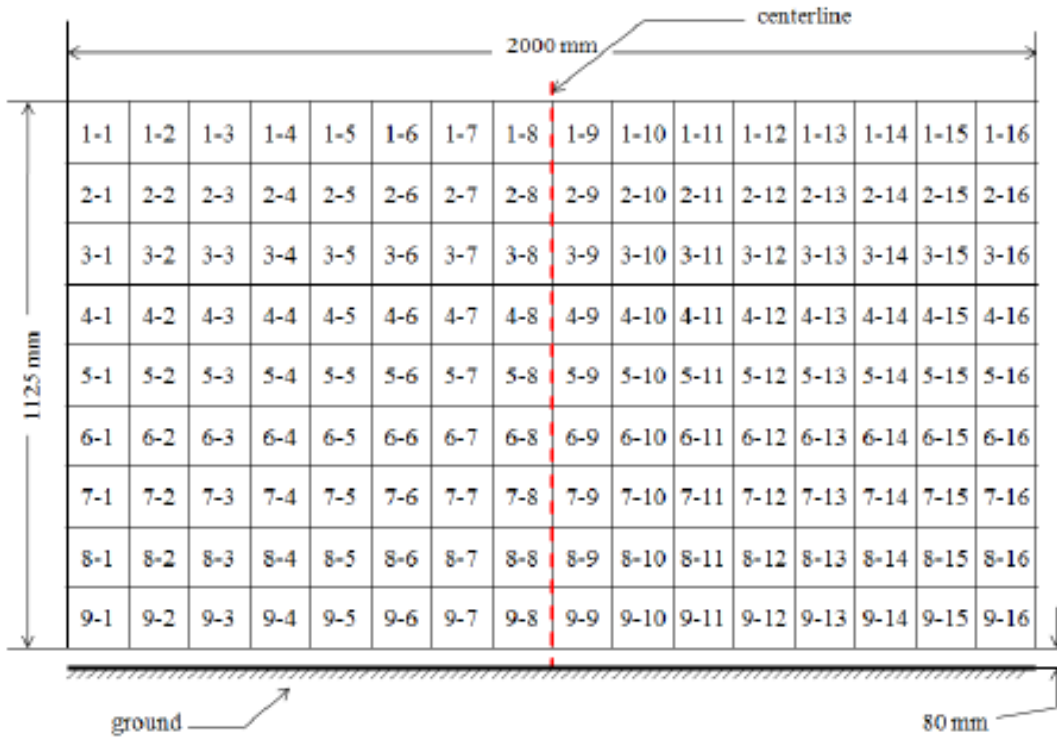


Figure 1 - Load Cell Locations on a 128-Load Cell Barrier with Plywood Height Extension*
 Please note above diagram is not actual representation of load cell barrier used.

DATA SHEET NO. 10
TEST VEHICLE SUMMARY OF RESULTS

Test Vehicle: 2020 Jeep Gladiator four door Truck
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20200307
 Test Date: 10/25/2019

INSTRUMENTATION

Instrumentation	Number of Channels Collected
Driver Dummy Accelerometers	47
Passenger Dummy Accelerometers	47
Vehicle Structure Accelerometers	8
Load Cell Barrier	384
Total	486

CAMERA COVERAGE

Type of Camera	Number Used in this Test
High-Speed Vehicle Onboard	2
High-Speed Offboard	14
Real-Time Panning	1
Total	17

**DATA SHEET NO. 11
POST-TEST OBSERVATIONS**

Test Vehicle: 2020 Jeep Gladiator four door Truck
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20200307
 Test Date: 10/25/2019

TEST DUMMY INFORMATION AND CONTACT LOCATIONS

Description	Driver	Passenger
Dummy Type / Serial No.	P572E 50 th Male / 142	P5720 5 th Female / 140
Head Contact	Frontal Airbag & Headrest	Frontal Airbag & Headrest
Upper Torso Contact	Front Airbag	Front Airbag
Lower Torso Contact	None	None
Left Knee Contact	Knee Bolster	Knee Bolster
Right Knee Contact	Knee Bolster	Knee Bolster

DOOR OPENING AND SEAT TRACK INFORMATION

Description	Driver	Passenger	Other
Locked / Unlocked Doors	Unlocked	Unlocked	
Front Door Opening	Closed & Operational	Closed & Operational	
Rear Door Opening	Closed & Operational	Closed & Operational	
Trunk/Hatch/Tailgate Opening			Closed & Operational
Seat Track Shift (mm)	0	0	
Seat Back Movement from Initial Position	None	None	

**NOTE: Indicate "No", "N/A", or "Yes" described

POST-TEST STRUCTURAL OBSERVATIONS

Critical Areas of Performance	Observations and Conclusions
Windshield Damage	None
Window Damage	None
Other	None

VEHICLE REBOUND FROM BARRIER

Measured Parameter	Units	Value
Left Side	mm	1135
Center	mm	1132
Right Side	mm	1050
Average	mm	1106


SUPPLEMENTAL RESTRAINT SYSTEM INFORMATION

Restraint Type	Driver		Passenger	
	Installed	Deployed	Installed	Deployed
Front Airbag	Yes	Yes	Yes	Yes
Side Airbag 1 - Curtain	No	N/A	No	N/A
Side Airbag 2 - Torso/Head Airbag	Yes	No	Yes	No
Knee Airbag	No	N/A	No	N/A
Seat Belt Pretensioner	Yes	Yes	Yes	Yes
Seat Belt Load Limiter	Yes	Yes	Yes	Yes
Other				

**DATA SHEET NO. 12
VEHICLE PROFILE MEASUREMENTS**

Test Vehicle: 2020 Jeep Gladiator four door Truck
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20200307
 Test Date: 10/25/2019

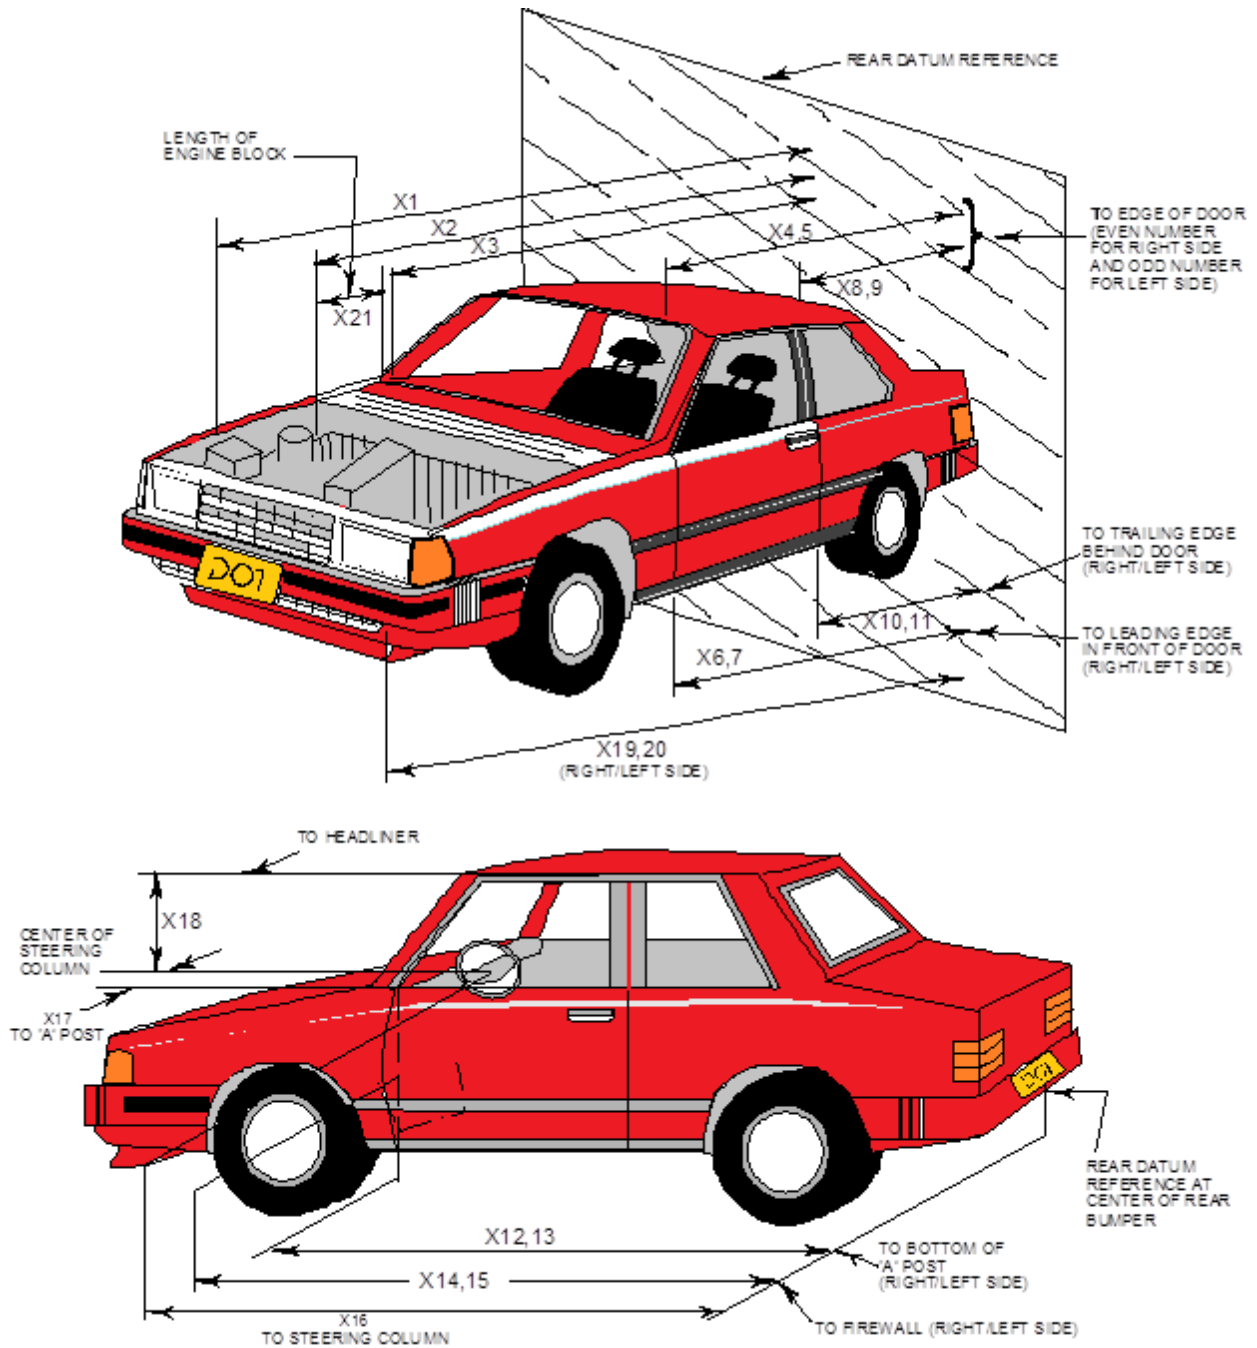

DATA SHEET NO. 12 ... (CONTINUED)
VEHICLE PROFILE MEASUREMENTS

Test Vehicle: 2020 Jeep Gladiator four door Truck
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20200307
 Test Date: 10/25/2019

No.	Measurement Description	Pre-Test	Post-Test	Difference
1	Total Length of Vehicle at Centerline	5490	5076	-414
2	Rear Surface of Vehicle (RSOV) to Front of Engine	4700	4709	9
3	RSOV to Firewall	4241	4199	-42
4	RSOV to Upper Leading Edge of Right Door	3844	3844	0
5	RSOV to Upper Leading Edge of Left Door	3842	3840	-2
6	RSOV to Lower Leading Edge of Right Door	3807	3814	7
7	RSOV to Lower Leading Edge of Left Door	3806	3809	3
8	RSOV to Upper Trailing Edge of Right Door	2905	2899	-6
9	RSOV to Upper Trailing Edge of Left Door	2902	2895	-7
10	RSOV to Lower Trailing Edge of Right Door	3036	3041	5
11	RSOV to Lower Trailing Edge of Left Door	3030	3032	2
12	RSOV to Bottom of "A" Post of Right Side	3905	3904	-1
13	RSOV to Bottom of "A" Post of Left Side	3903	3902	-1
14	RSOV to Firewall, Right Side	4248	4246	-2
15	RSOV to Firewall, Left Side	4246	4236	-10
16	RSOV to Steering Column	3468	3543	75
17	Center of Steering Column to "A" Post	272	275	3
18	Center of Steering Column to Headliner	427	435	8
19	RSOV to Right Side of Front Bumper	5484	5069	-415
20	RSOV to Left Side of Front Bumper	5476	5094	-382
21	Length of Engine Block	453	453	0
RD	RSOV to Right Side of Dash Panel	3670	3668	-2
CD	RSOV to Center of Dash Panel	3633	3638	5
LD	RSOV to Left Side of Dash Panel	3652	3648	-4

*UR= Unrecoverable data point
 All Dimensions in mm

DATA SHEET NO. 13
ACCIDENT INVESTIGATION DIVISION DATA

Test Vehicle: 2020 Jeep Gladiator four door Truck
Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20200307
Test Date: 10/25/2019


VEHICLE INFORMATION

VIN: 1C6JJTAG6LL143639
Vehicle Size Category: Truck

Wheelbase (mm): 3487
Test Weight (kg): 2334

ACCELEROMETER DATA

Accelerometer Locations: Please See Data Sheet No. 7
Cal. Procedure / Interval: Calspan Procedure / 6 month
Integration Algorithm: Trapezoidal
Linearity: > 99%
Impact Velocity (km/h): 56.18
Velocity Change (km/h): 59.7
Time of Separation (ms): 146

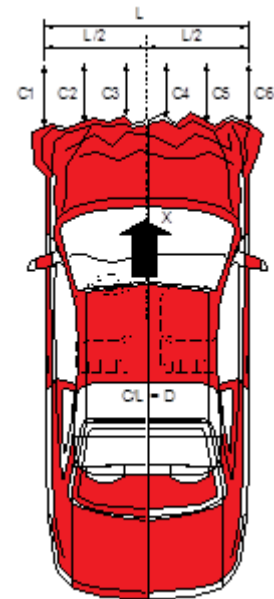

CRUSH PROFILE

Collision Deformation Classification: 12FDEW2
Midpoint of Damage: C4
Damage Region Length (mm): 1534
Impact Mode: Frontal

No.	Measurement Description	Units	Pre-Test	Post-Test	Difference
C1	Crush Zone 1 at Left Side	mm	5391	5099	292
C2	Crush Zone 2 at Left Side	mm	5507	5128	379
C3	Crush Zone 3 at Left Side	mm	5477	5062	415
C4	Crush Zone 4 at Right Side	mm	5477	5070	407
C5	Crush Zone 5 at Right Side	mm	5509	5109	400
C6	Crush Zone 6 at Right Side	mm	5393	5112	281
L	C1 to C6	mm	1534	1486	48

**DATA SHEET NO. 14
VEHICLE INTRUSION MEASUREMENTS**

Test Vehicle: 2020 Jeep Gladiator four door Truck
 Test Program: NCAP Frontal Barrier Impact Test


NHTSA No.: M20200307
 Test Date: 10/25/2019

DOOR OPENING WIDTH

Item	Description	Units	Pre-Test	Post-Test	Difference
A	Left Side Upper	mm	905	893	-12
B	Left Side Lower	mm	823	819	-4
D	Right Side Upper	mm	905	897	-8
E	Right Side Lower	mm	823	821	-2

WHEELBASE MEASUREMENTS

Item	Description	Units	Pre-Test	Post-Test	Difference
C	Left Side Wheelbase	mm	3487	3422	-65
F	Right Side Wheelbase	mm	3487	3456	-31

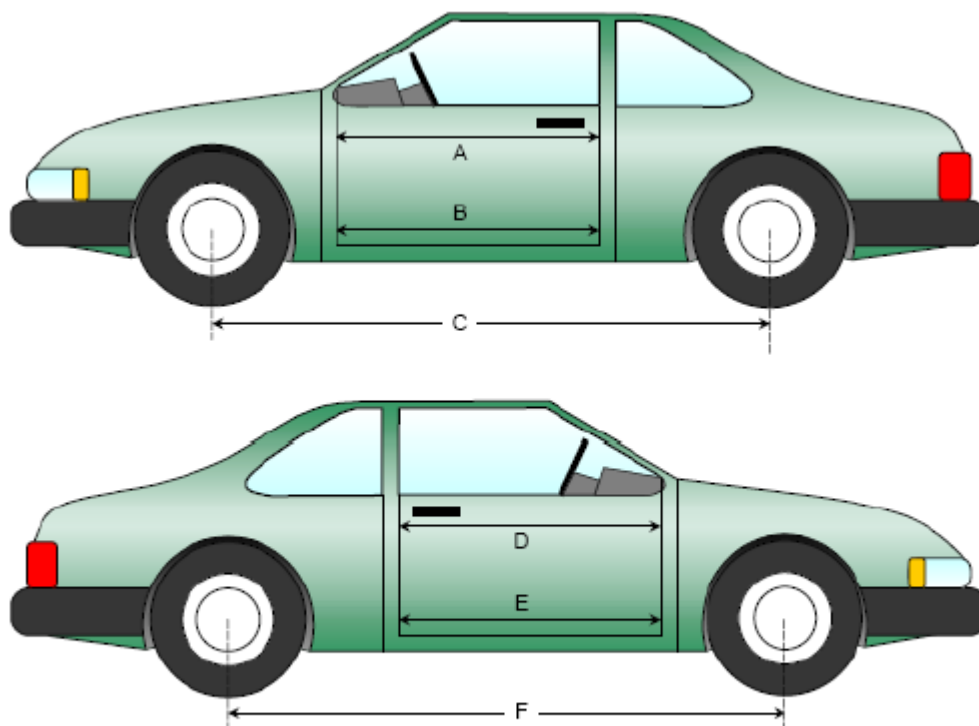

Left & Right Side Views

**DATA SHEET NO.14 ... (CONTINUED)
VEHICLE INTRUSION MEASUREMENTS**


Test Vehicle: 2020 Jeep Gladiator four door Truck
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20200307
 Test Date: 10/25/2019

DRIVER COMPARTMENT INTRUSION

Item	Description	Units	Pre-Test	Post-Test	Difference
AB	Door Opening (Inside Window Jam)	mm	651	657	6
CX	Left Knee Bolster to X	mm	252	253	1
DX	Right Knee Bolster to X	mm	243	250	7
EX	Brake Pedal to X	mm	491	488	-3
FX	Foot Rest to X	mm	646	645	-1
GX	Center of Steering Column Wheel Hub to X	mm	-11	52	63

X = Front of Seat Track (Stationary)

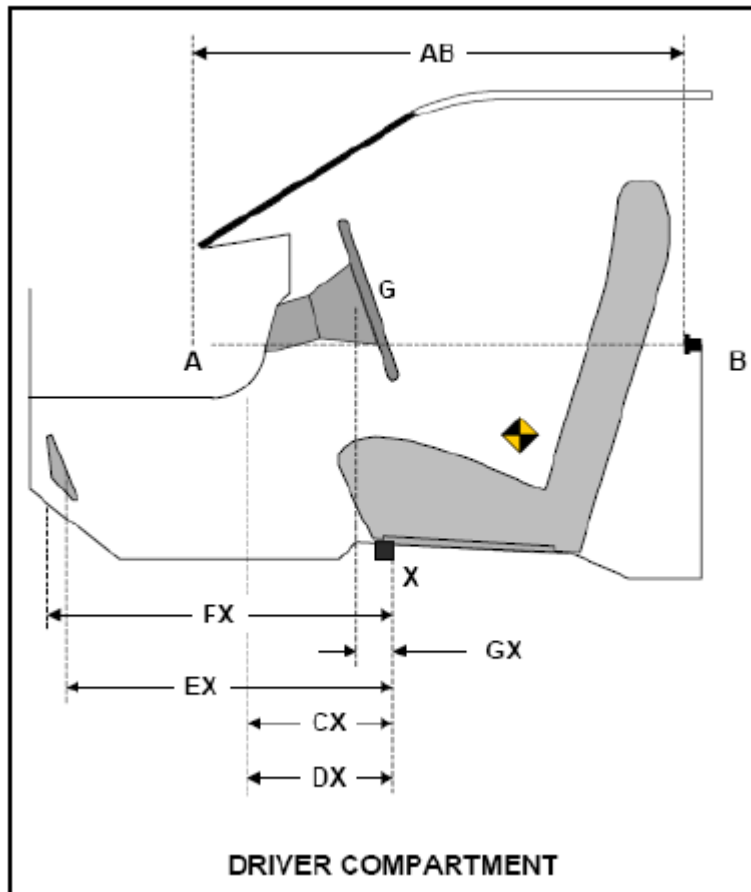

DATA SHEET NO. 15
SUMMARY OF FMVSS 212, 219 (PARTIAL), AND 301 DATA

Test Vehicle: 2020 Jeep Gladiator four door Truck
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20200307
 Test Date: 10/25/2019


Windshield Mounting Details: A 0.8 mm trim surrounds the top and side of windshield while a plastic shroud is on the bottom.

The standard requires that the post-test retention measurement be a minimum of 75% of the pre-test total periphery measurement for vehicles not equipped with occupant passive restraints and 50% for each side of the windshield for vehicles which are equipped with occupant passive restraints.

Temperature of windshield molding during test: 21° C

WINDSHIELD PERIPHERY MEASUREMENTS

Measurement	Pre-Test (mm)	Post-Test (mm)	% Retention
Left Side	1832.5	1832.5	100
Right Side	1832.5	1832.5	100
Total	3665	3665	100

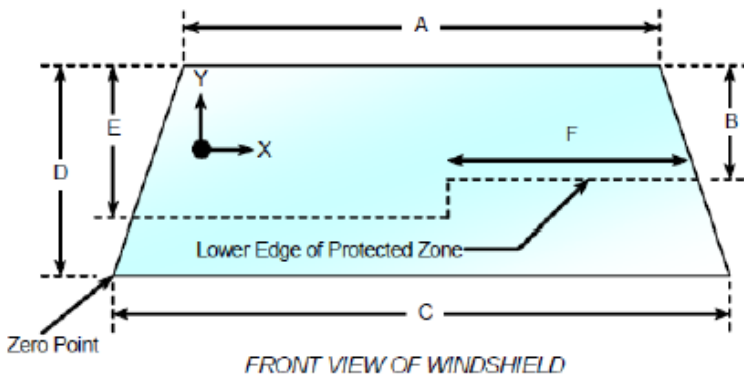

Item	Units	Value
A	mm	1320
B	mm	250
C	mm	1415
D	mm	465
E	mm	255
F	mm	522

AREAS OF PROTECTED ZONE FAILURES

- A. Provide coordinates of the area that the protected zone was penetrated more than .25 inches by a vehicle component other than one that is normally in contact with the windshield.
- No Penetration

X	Y

- B. Provide coordinates of the area beneath the protected zone that the inner surface of the windshield was penetrated by a vehicle component.
- No Penetration

X	Y

DATA SHEET NO. 15 ... (CONTINUED)
SUMMARY OF FMVSS 212, 219 (PARTIAL), AND 301 DATA

Test Vehicle: 2020 Jeep Gladiator four door Truck
Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20200307
Test Date: 10/25/2019

FMVSS 301 FUEL SYSTEM INTEGRITY POST IMPACT DATA

Temperature at Time of Impact: 21 ° C

Test Time: 8:38 AM


STODDARD SOLVENT SPILLAGE MEASUREMENTS

- A. From impact until vehicle motion ceases: 0 oz.
(Maximum allowable is 1 oz.)
- B. For the 5-minute period after motion ceases: 0 oz.
(Maximum allowable is 5 oz.)
- C. For the following 25 minutes: 0 oz.
(Maximum allowable is 1 oz./minute)
- D. Spillage: No Spillage Occurred

DATA SHEET NO. 16
FMVSS 301 STATIC ROLLOVER RESULTS

Test Vehicle: 2020 Jeep Gladiator four door Truck
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20200307
 Test Date: 10/25/2019

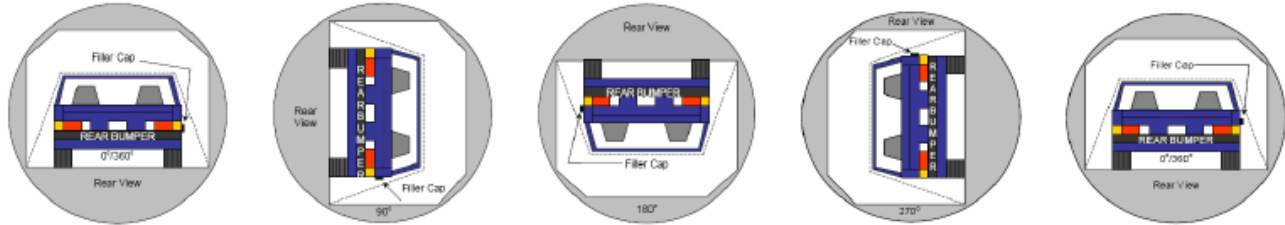

0° TO 90° 90° TO 180° 180° TO 270° 270° TO 360°

1. The specified fixture rollover rate for each 90° of rotation is 60 to 180 seconds.
2. The position hold time at each position is 300 seconds (minimum).
3. Details of Stoddard Solvent Spillage: No Spillage Occurred

SOLVENT COLLECTION TIME TABLE IN SECONDS

Test Phase	Rotation Time	Hold Time	Total Time
0° to 90°	68	300	368
90° to 180°	65	300	365
180° to 270°	64	300	364
270° to 360°	65	300	365

FMVSS 301 SPILLAGE TABLE

Test Phase	First 5 Minutes	Sixth Minute	Seventh Minute	Eighth Minute
0° to 90°	0	0	0	
90° to 180°	0	0	0	
180° to 270°	0	0	0	
270° to 360°	0	0	0	


SOLVENT SPILLAGE LOCATION TABLE

Test Phase	Spillage Location
0° to 90°	None
90° to 180°	None
180° to 270°	None
270° to 360°	None

DATA SHEET NO. 17
DUMMY / VEHICLE TEMPERATURE STABILIZATION CHART

Test Vehicle: 2020 Jeep Gladiator four door Truck
Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20200307
Test Date: 10/25/2019

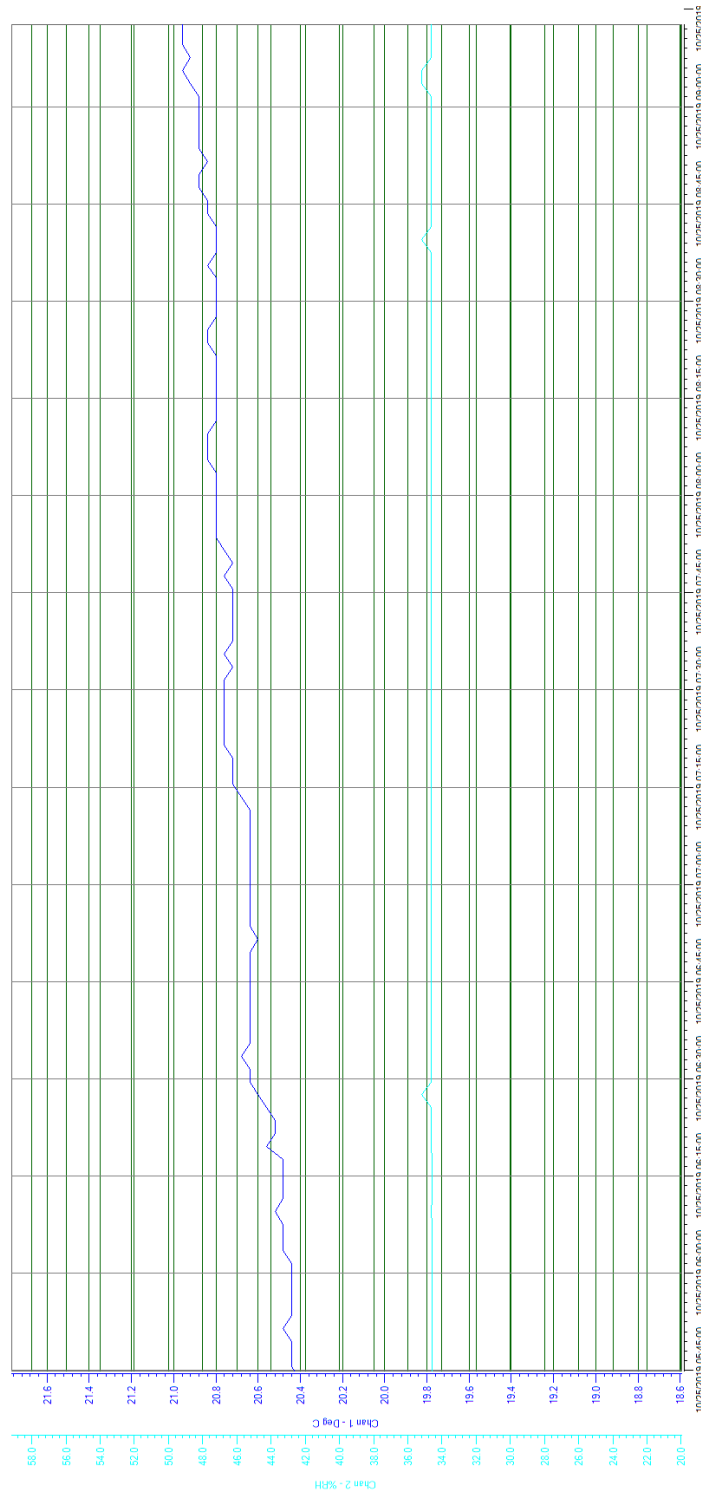

Temperature and Humidity Stabilization Chart/Data for Dummies and Test Vehicle

APPENDIX A
PHOTOGRAPHS

TABLE OF PHOTOGRAPHS

Fig.	Description	Page
1	Load Cell Location	A-5
2	Pre-Test Load Cell Wall	A-5
3	Post-Test Load Cell Wall	A-6
4	Manufacturer's Label	A-6
5	Tire Placard	A-7
6	2020 Jeep Gladiator Frontal As Delivered	A-7
7	Left Rear 3-4 View, as Received	A-8
8	Pre-Test Front View of Test Vehicle	A-8
9	Post-Test Front View of Test Vehicle	A-9
10	Pre-Test Left View of Test Vehicle	A-9
11	Post-Test Left View of Test Vehicle	A-10
12	Pre-Test Right View of Test Vehicle	A-10
13	Post-Test Right View of Test Vehicle	A-11
14	Pre-Test Right Front 3-4 View	A-11
15	Post-Test Right Front 3-4 View	A-12
16	Pre-Test Left Rear 3-4 View	A-12
17	Post-Test Left Rear 3-4 View	A-13
18	Pre-Test Windshield View	A-13
19	Post-Test Windshield View	A-14
20	Pre-Test Engine Compartment View	A-14
21	Post-Test Engine Compartment View	A-15
22	Pre-Test Fuel Filler Cap View	A-15
23	Post-Test Fuel Filler Cap View	A-16
24	Pre-Test Front Underbody View ¹	A-16
25	Post-Test Front Underbody View ¹	A-17
26	Pre-Test Rear Underbody View ¹	A-17
27	Post-Test Rear Underbody View ¹	A-18
28	Pre-Test Dummy Cable Routing	A-18
29	Post-Test Dummy Cable Routing	A-19
30	Pre-Test Driver Dummy Front View	A-19
31	Post-Test Driver Dummy Front View	A-20
32	Pre-Test Driver Dummy Window View	A-20
33	Post-Test Driver Dummy Window View	A-21
34	Pre-Test Driver Dummy and Vehicle Interior View	A-21
35	Post-Test Driver Dummy and Vehicle Interior View	A-22

Fig.	Description	Page
36	Pre-Test Driver's Seat Fore-Aft Markings	A-22
37	Post-Test Driver's Seat Fore-Aft Markings	A-23
38	Pre-Test View of Belt Anchorage for Driver Dummy	A-23
39	Post-Test View of Belt Anchorage for Driver Dummy	A-24
40	Pre-Test View of Belt Buckle and Latch Plate for Driver Dummy	A-24
41	Post-Test View of Belt Buckle and Latch Plate for Driver Dummy	A-25
42	Pre-Test Driver Dummy Feet	A-25
43	Post-Test Driver Dummy Feet	A-26
44	Pre-Test Driver's Side Knee Bolster	A-26
45	Post-Test Driver's Side Knee Bolster	A-27
46	Pre-Test Driver's Side Floorpan	A-27
47	Post-Test Driver's Side Floorpan	A-28
48	Post-Test Driver Dummy Face	A-28
49	Post-Test Driver Dummy Contact With Airbag	A-29
50	Post-Test Driver Dummy Contact With Headrest	A-29
51	Pre-Test View of the Steering Wheel	A-30
52	Post-Test View of the Steering Wheel	A-30
53	Pre-Test Passenger Dummy Front View	A-31
54	Post-Test Passenger Dummy Front View	A-31
55	Pre-Test Passenger Dummy Window View	A-32
56	Post-Test Passenger Dummy Window View	A-32
57	Pre-Test Passenger Dummy and Vehicle Interior View	A-33
58	Post-Test Passenger Dummy and Vehicle Interior View	A-33
59	Pre-Test Passenger's Seat Fore-Aft Markings	A-34
60	Post-Test Passenger's Seat Fore-Aft Markings	A-34
61	Pre-Test View of Belt Anchorage for Passenger Dummy	A-35
62	Post-Test View of Belt Anchorage for Passenger Dummy	A-35
63	Pre-Test View of Belt Buckle and Latch Plate for Passenger Dummy	A-36
64	Post-Test View of Belt Buckle and Latch Plate for Passenger Dummy	A-36
65	Pre-Test Passenger Dummy Feet	A-37
66	Post-Test Passenger Dummy Feet	A-37
67	Pre-Test Passenger's Side Knee Bolster	A-38
68	Post-Test Passenger's Side Knee Bolster	A-38
69	Pre-Test Passenger's Side Floorpan	A-39
70	Post-Test Passenger's Side Floorpan	A-39
71	Post-Test Passenger Dummy Face	A-40

Fig.	Description	Page
72	Post-Test Passenger Dummy Contact With Airbag	A-40
73	Post-Test Passenger Dummy Contact With Headrest	A-41
74	Photograph of Ballast Installed in Vehicle	A-41
75	Post-Test Stoddard Solvent Spillage Location View, if Required	A-40
76	Post-Test Speed Trap Read-Out	A-40
77	Vehicle at 0° on Static Rollover Device	A-41
78	Vehicle at 90° on Static Rollover Device	A-41
79	Vehicle at 180° on Static Rollover Device	A-42
80	Vehicle at 270° on Static Rollover Device	A-42
81	Vehicle at 360° on Static Rollover Device	A-43
82	2020 Jeep Gladiator Frontal Impact Event	A-43
83	Monroney Label Photograph	A-44

¹NOTE: *The underbody views should include the following vehicle components: fuel pump, fuel lines, sender unit, fuel tank filler pipe and any other visible system components.*

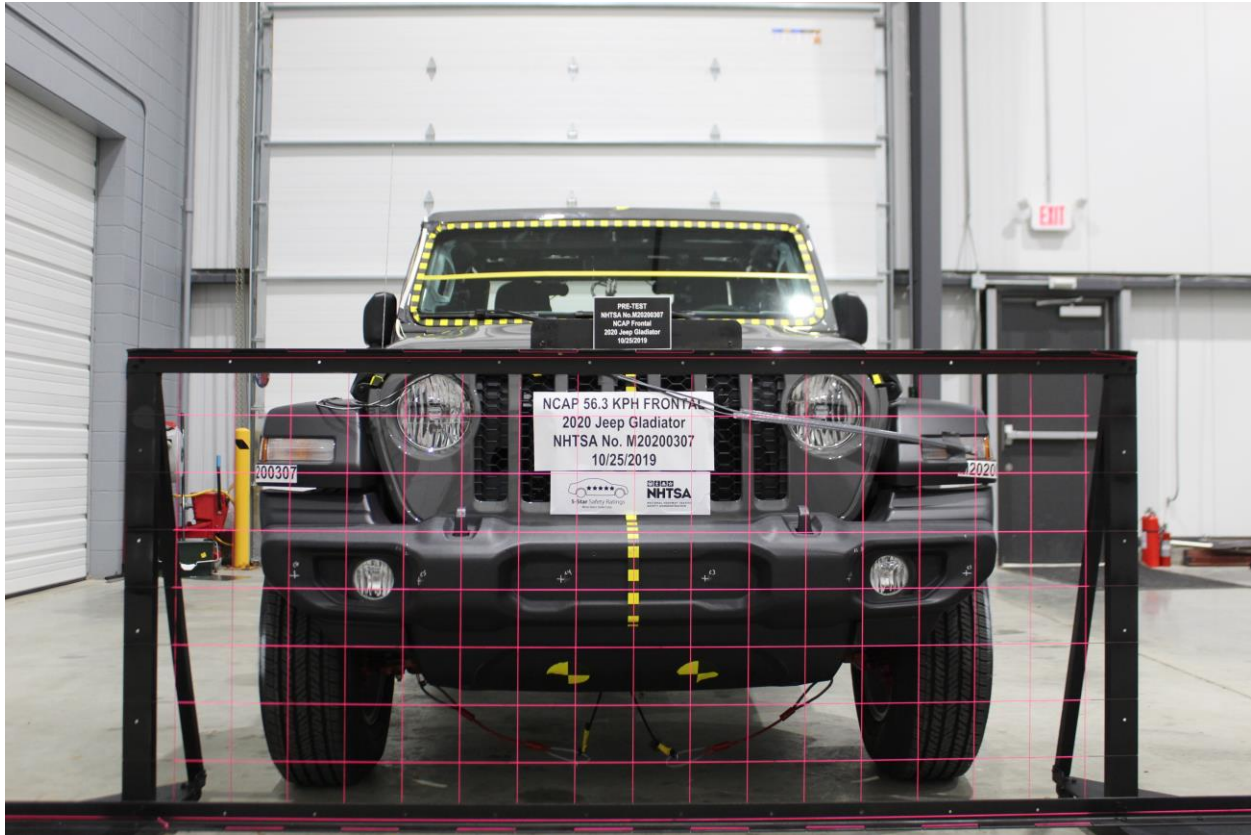


Figure A-1: Load Cell Location



Figure A-2: Pre-Test Load Cell Wall



Figure A-3: Post-Test Load Cell Wall



Figure A-4: Manufacturer's Label

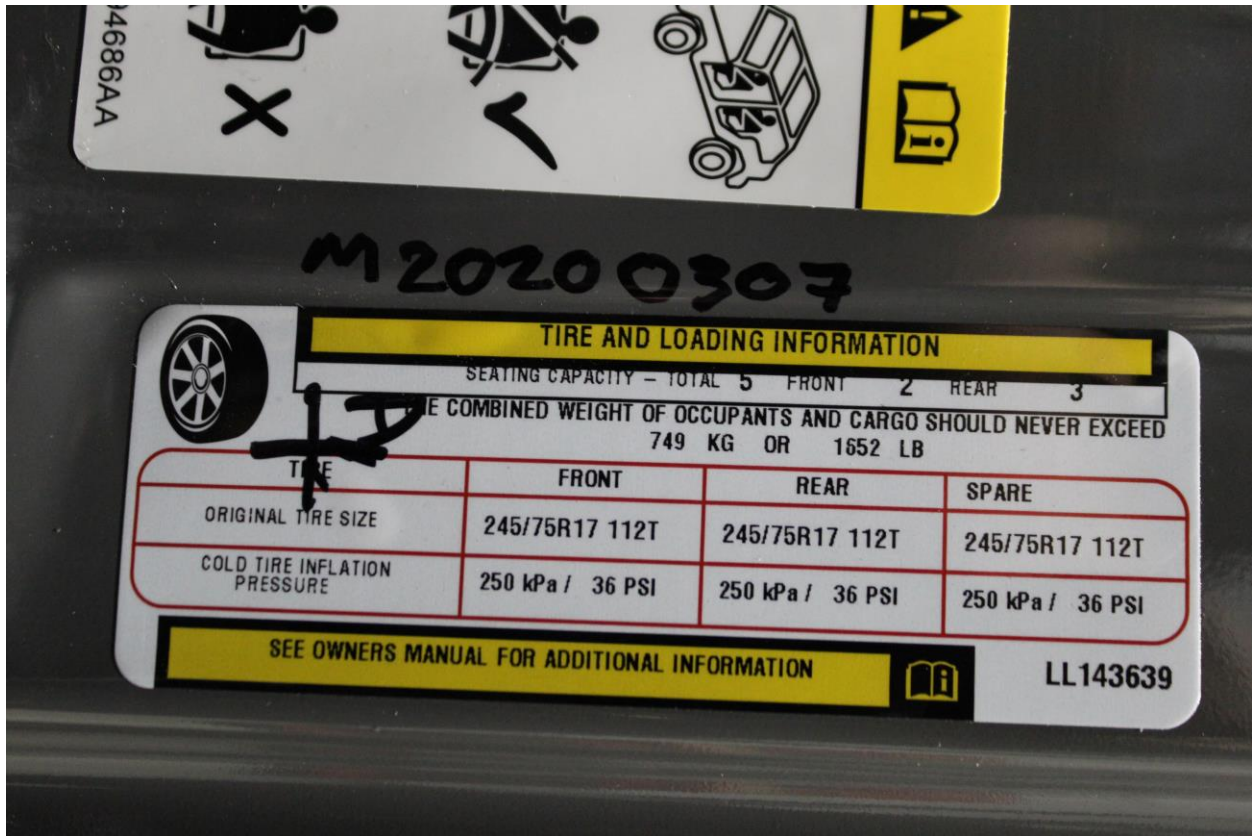


Figure A-5: Tire Placard



Figure A-6: 2020 Jeep Gladiator Frontal As Delivered



M20200307

Figure A-7: Left Rear 3-4 View, As Received



PRE-TEST
NHTSA No. M20200307
NCAP Frontal
2020 Jeep Gladiator
10/25/2019

NCAP 56.3 KPH FRONTAL
2020 Jeep Gladiator
NHTSA No. M20200307
10/25/2019

5-Star Safety Rating
NHTSA

00307

2020

Figure A-8: Pre-Test Front View of Test Vehicle



Figure A-9: Post-Test Front View of Test Vehicle



Figure A-10: Pre-Test Left View of Test Vehicle



Figure A-11: Post-Test Left View of Test Vehicle



Figure A-12: Pre-Test Right View of Test Vehicle



Figure A-13: Post-Test Right View of Test Vehicle



Figure A-14: Pre-Test Right Front 3-4 View



Figure A-15: Post-Test Right Front 3-4 View



Figure A-16: Pre-Test Left Rear 3-4 View



Figure A-17: Post-Test Left Rear 3-4 View



Figure A-18: Pre-Test Windshield View



Figure A-19: Post-Test Windshield View



Figure A-20: Pre-Test Engine Compartment View



Figure A-21: Post-Test Engine Compartment View



Figure A-22: Pre-Test Fuel Filler Cap View



Figure A-23: Post-Test Fuel Filler Cap View

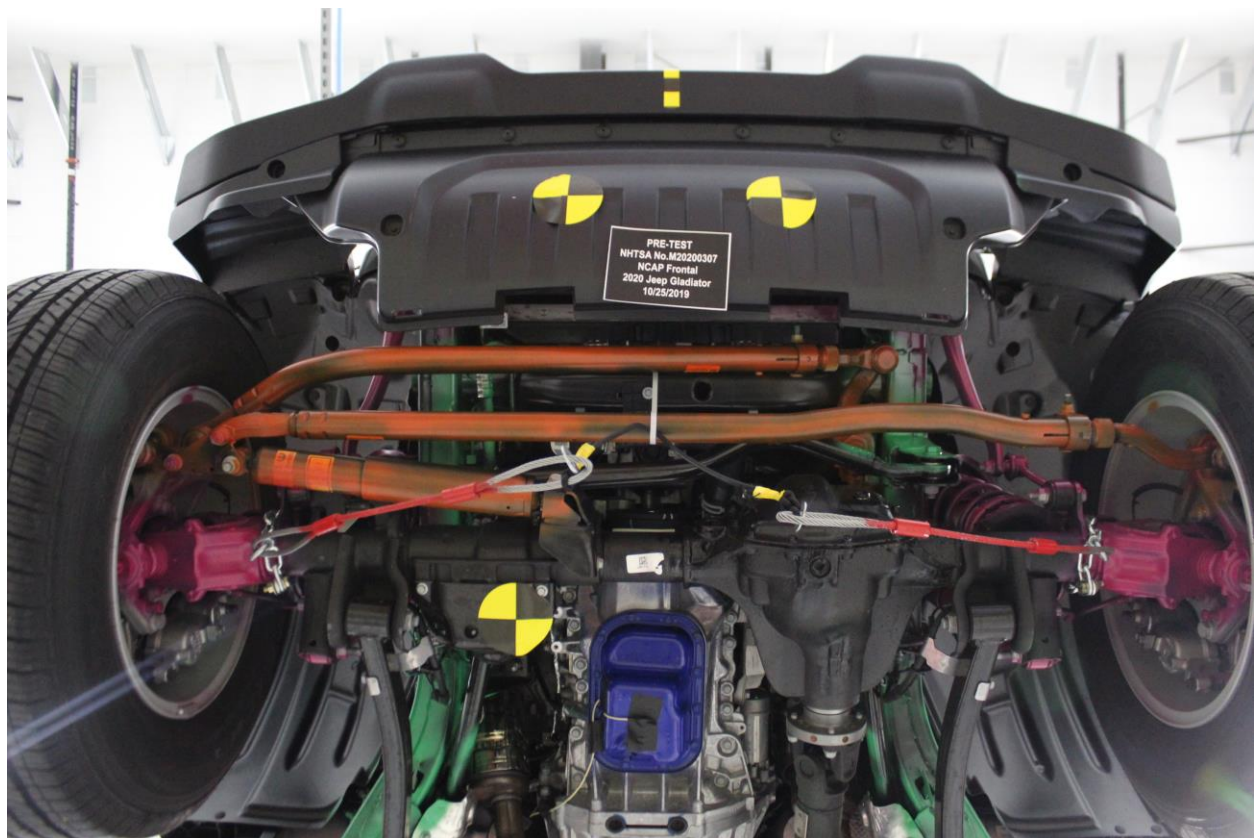


Figure A-24: Pre-Test Front Underbody View



Figure A-25: Post-Test Front Underbody View

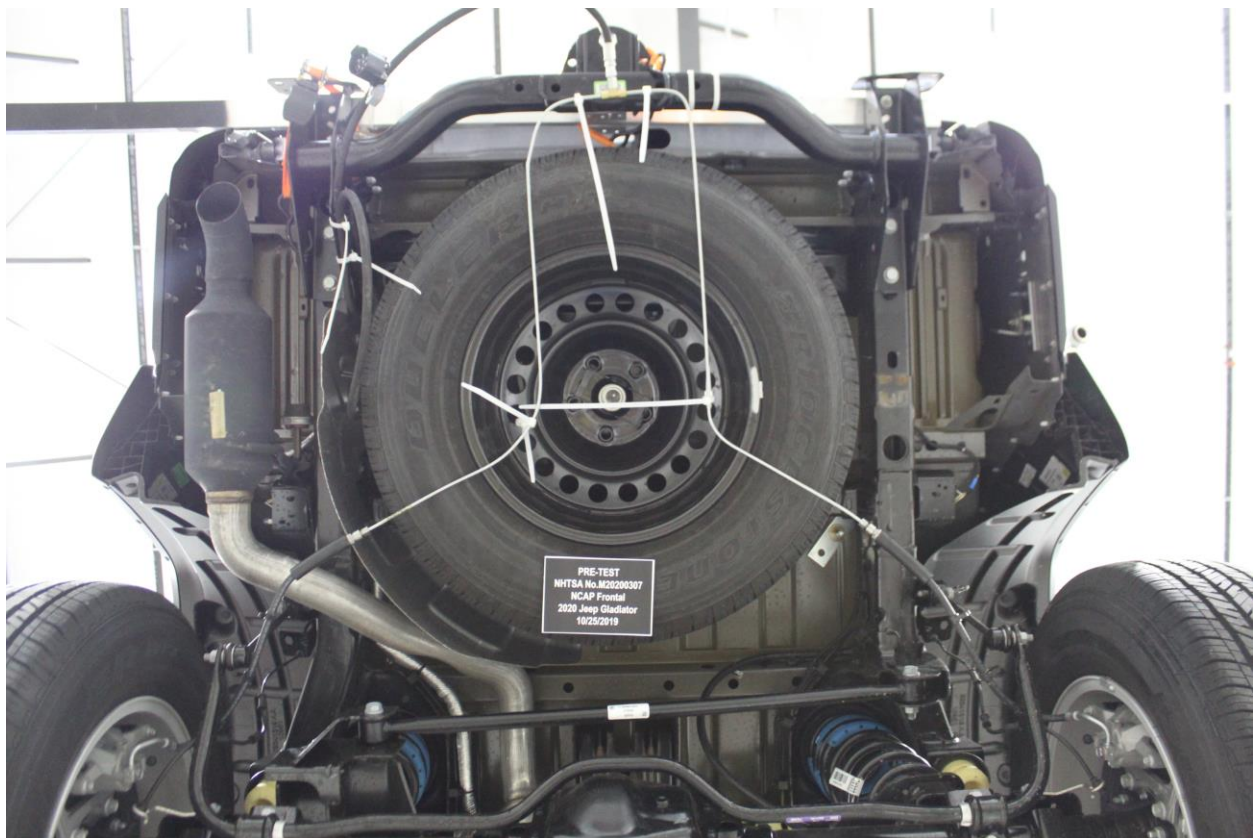


Figure A-26: Pre-Test Rear Underbody View

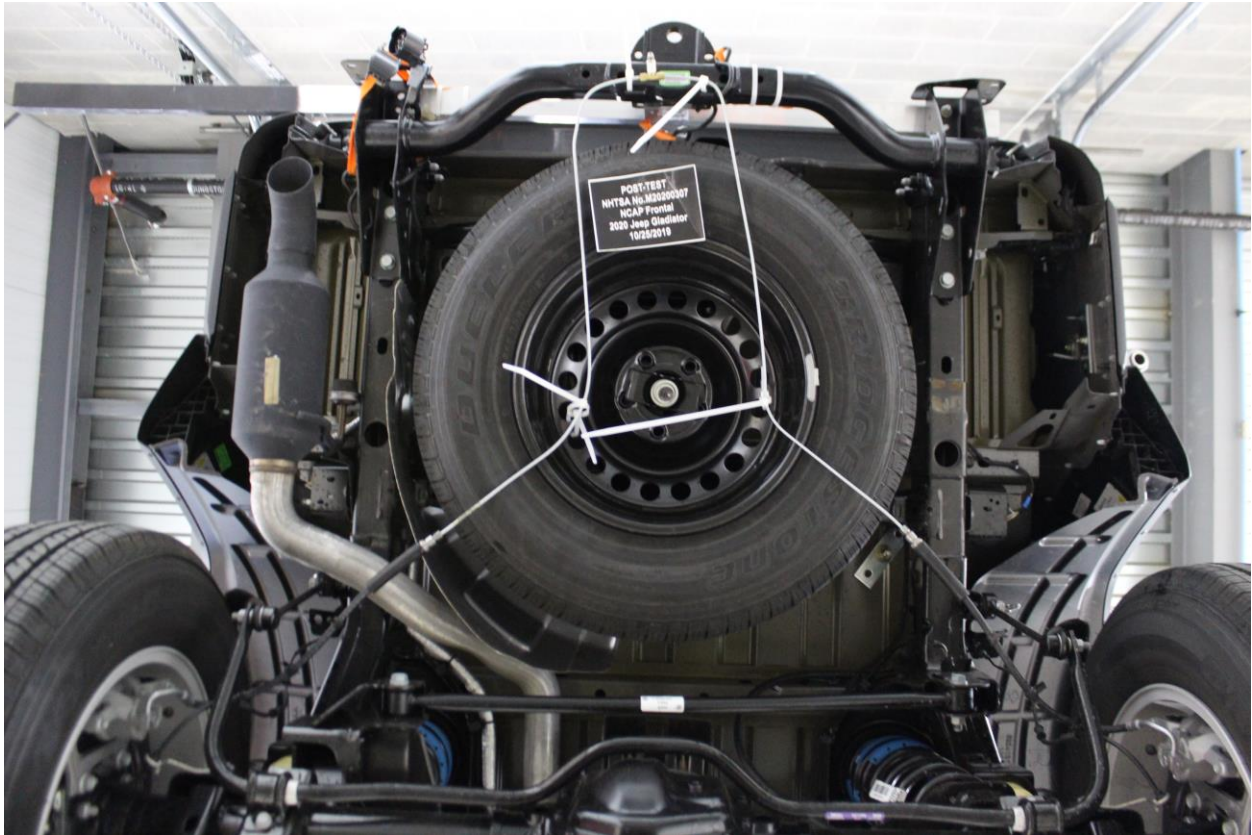


Figure A-27: Post-Test Rear Underbody View

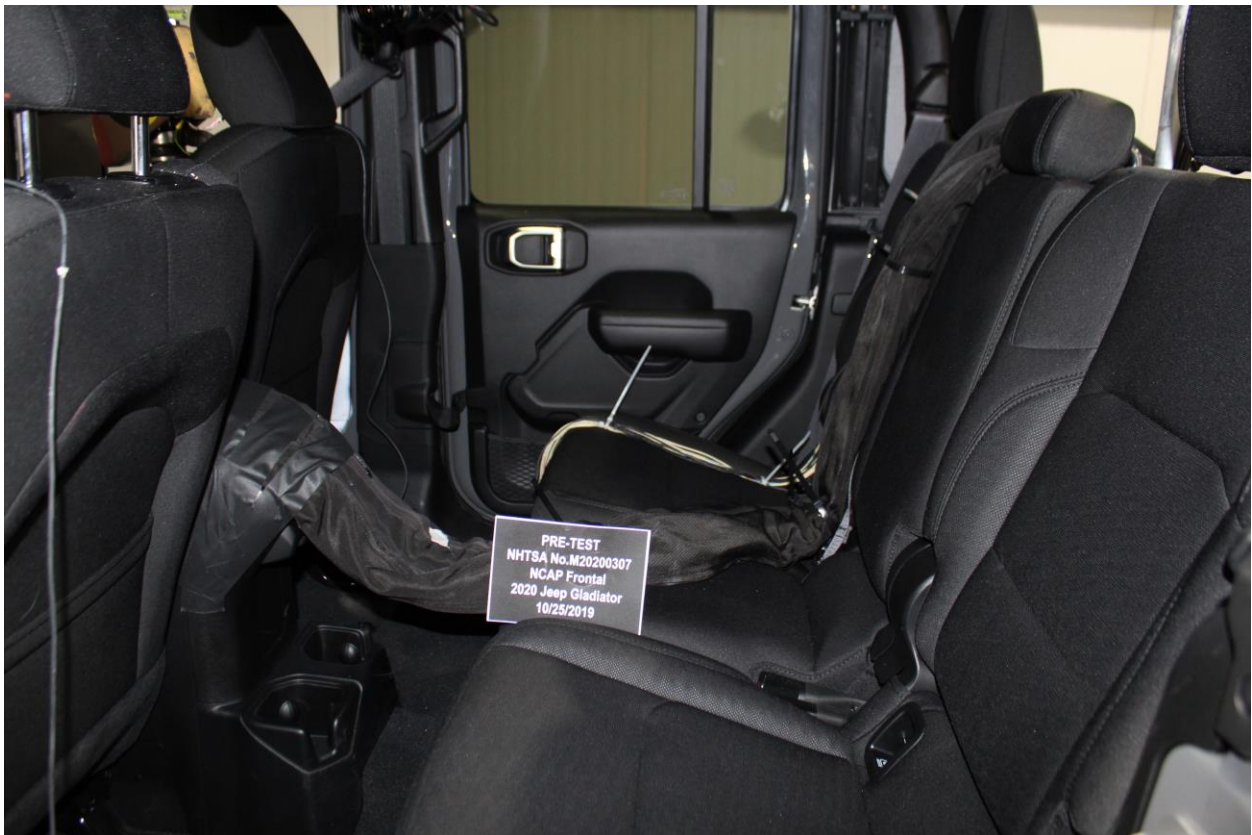


Figure A-28: Pre-Test Dummy Cable Routing

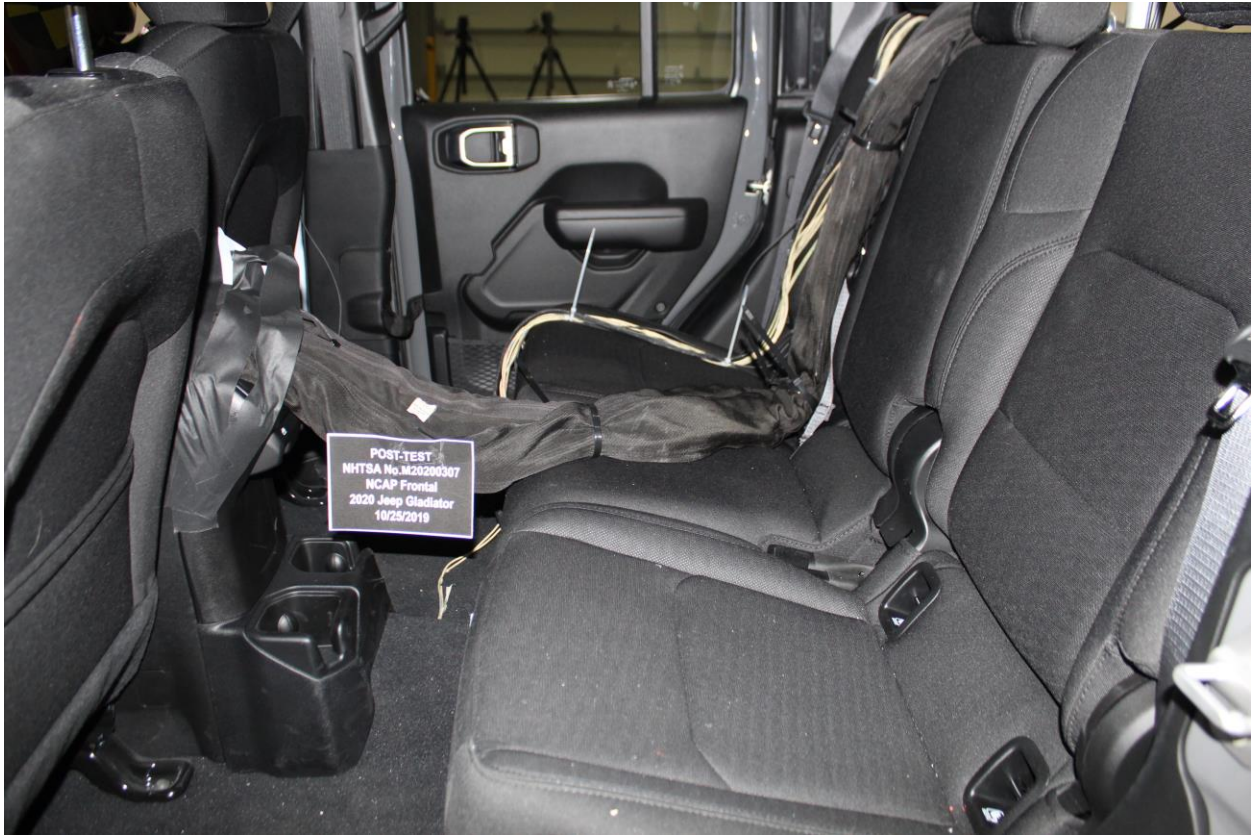


Figure A-29: Post-Test Dummy Cable Routing



Figure A-30: Pre-Test Driver Dummy Front View

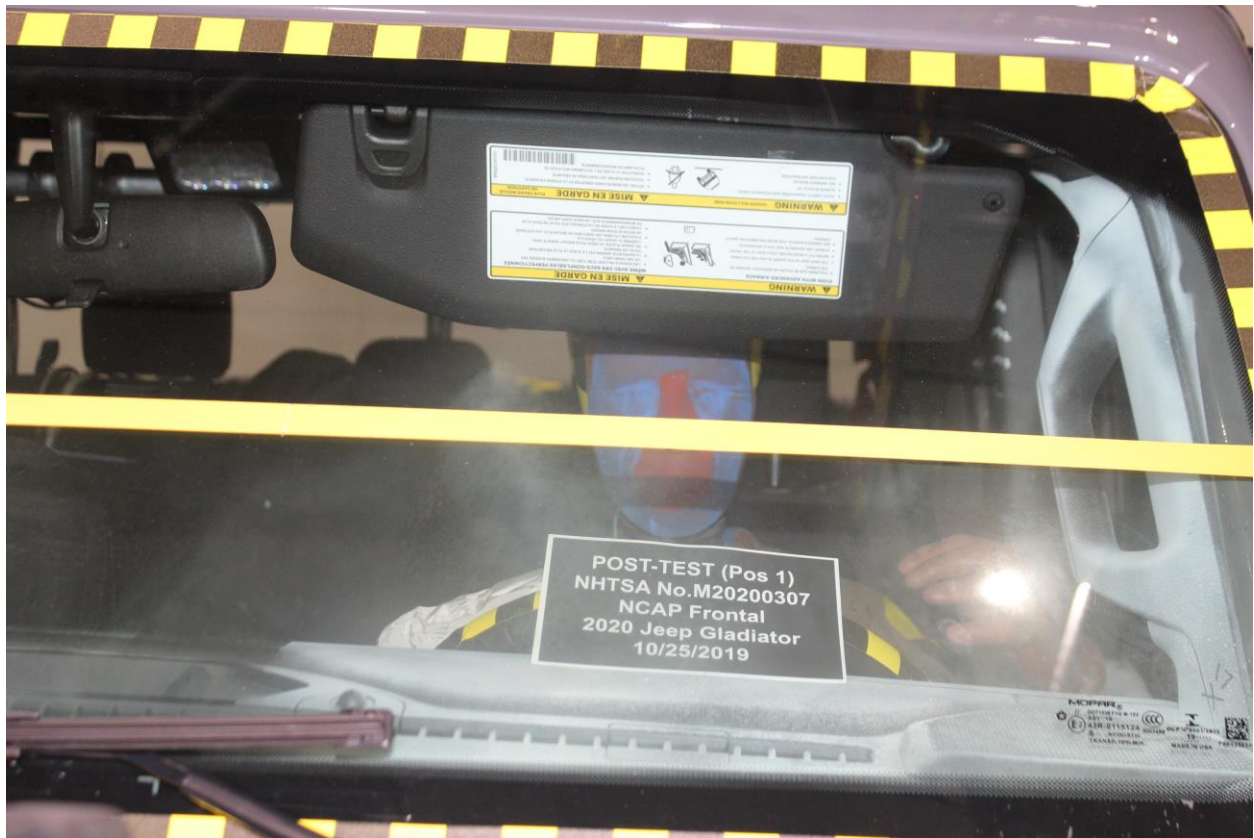


Figure A-31: Post-Test Driver Dummy Front View



Figure A-32: Pre-Test Driver Dummy Window View



Figure A-33: Post-Test Driver Dummy Window View



Figure A-34: Pre-Test Driver Dummy and Vehicle Interior View



Figure A-35: Post-Test Driver Dummy and Vehicle Interior View

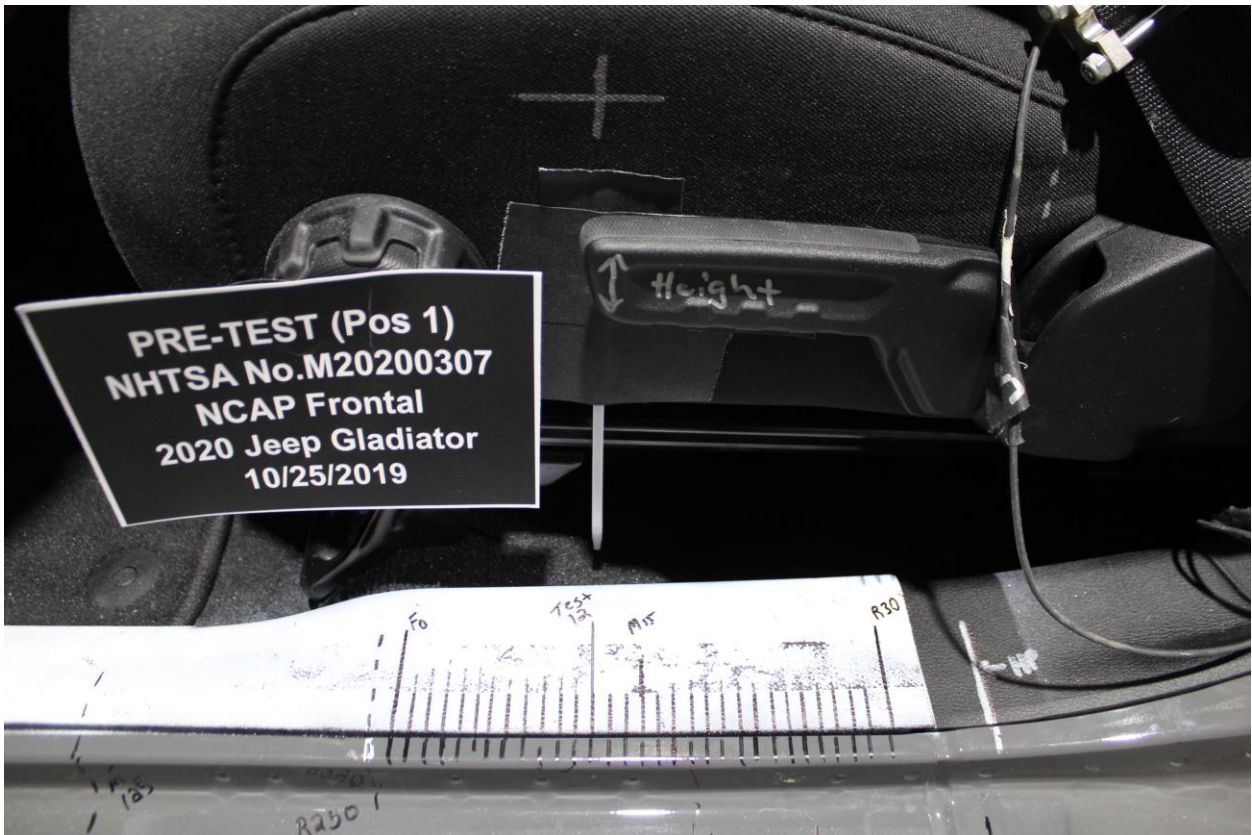


Figure A-36: Pre-Test Driver's Seat Fore-Aft Markings



Figure A-37: Post-Test Driver's Seat Fore-Aft Markings

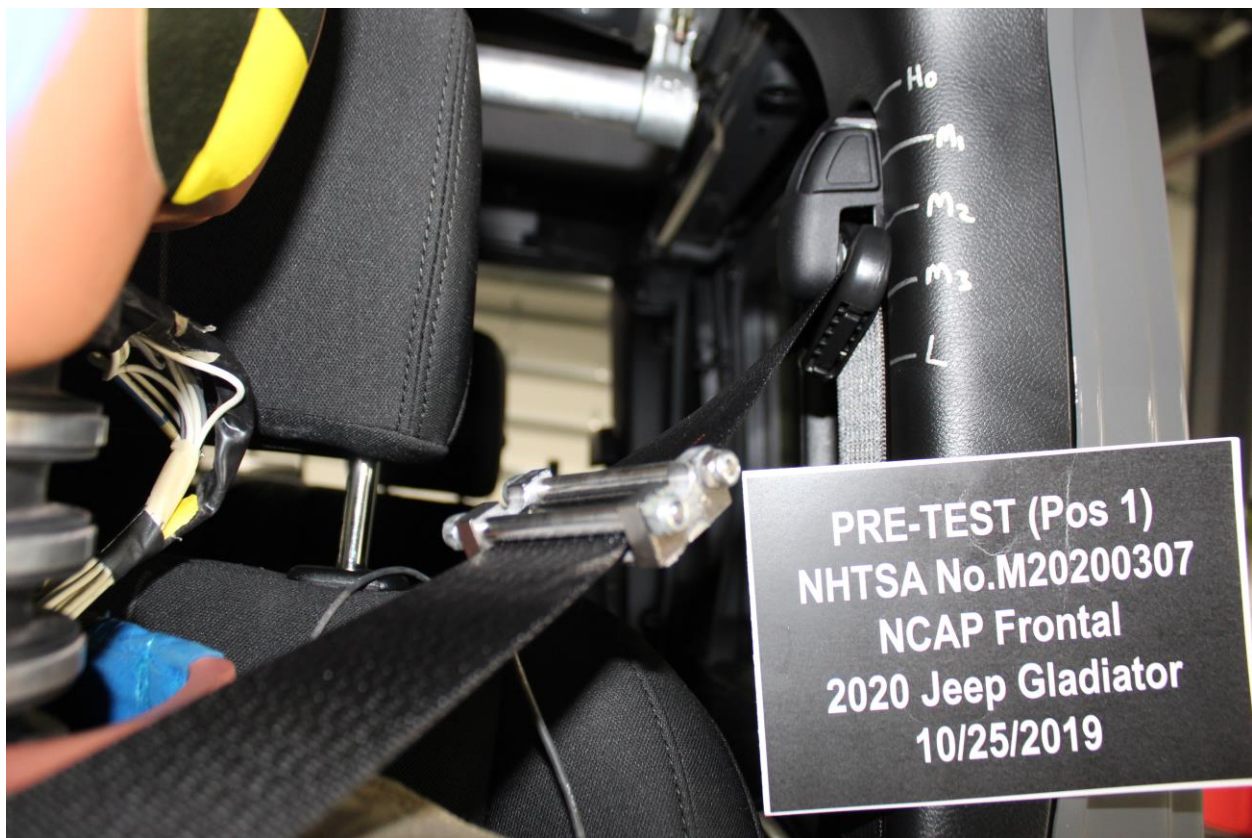


Figure A-38: Pre-Test View of Belt Anchorage for Driver Dummy



Figure A-39: Post-Test View of Belt Anchorage for Driver Dummy



Figure A-40: Pre-Test View of Belt Buckle and Latch Plate for Driver Dummy



Figure A-41: Post-Test View of Belt Buckle and Latch Plate for Driver Dummy



Figure A-42: Pre-Test Driver Dummy Feet



Figure A-43: Post-Test Driver Dummy Feet



Figure A-44: Pre-Test Driver's Side Knee Bolster



Figure A-45: Post-Test Driver's Side Knee Bolster



Figure A-46: Pre-Test Driver's Side Floorpan



Figure A-47: Post-Test Driver's Side Floorpan



Figure A-48: Post-Test Driver Dummy Face



Figure A-49: Post-Test Driver Dummy Contact With Airbag

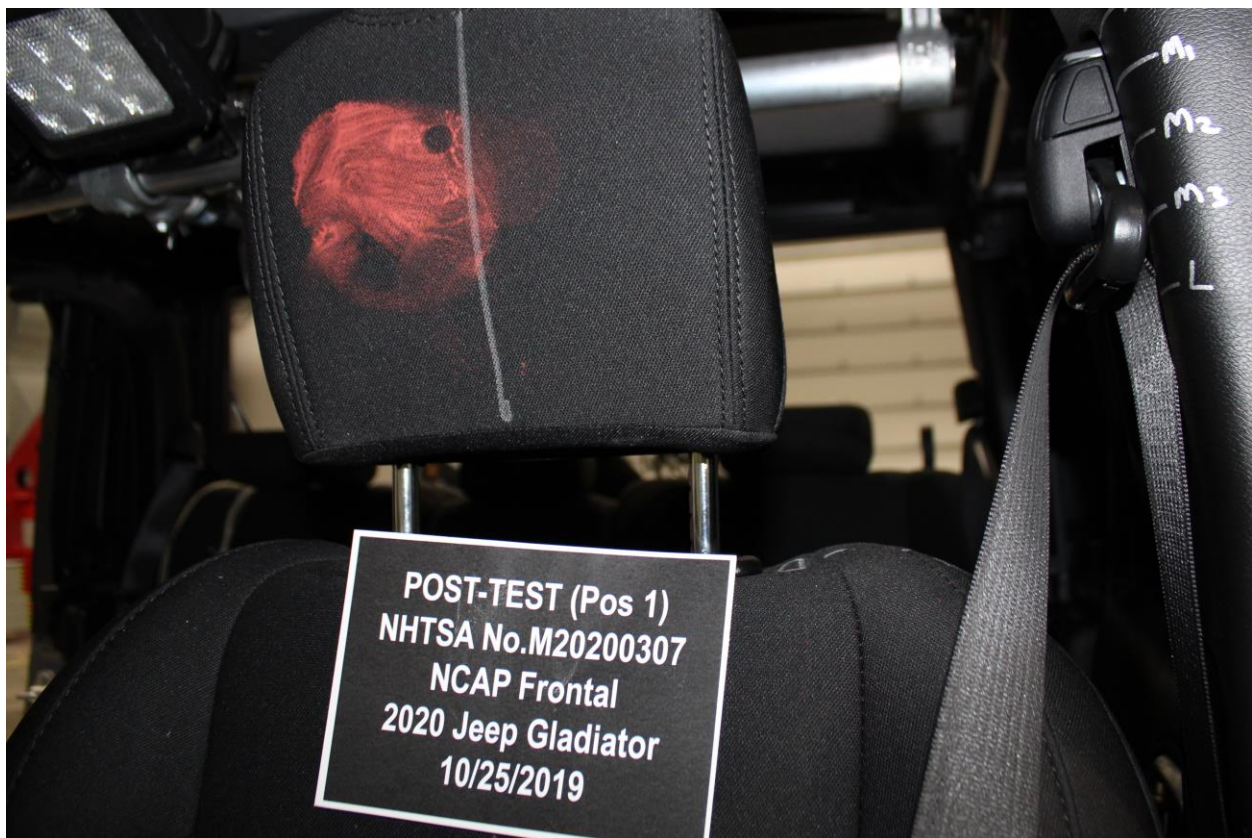


Figure A-50: Post-Test Driver Dummy Contact With Headrest



Figure A-51: Pre-Test View of the Steering Wheel



Figure A-52: Post-Test View of the Steering Wheel



Figure A-53: Pre-Test Passenger Dummy Front View



Figure A-54: Post-Test Passenger Dummy Front View



Figure A-55: Pre-Test Passenger Dummy Window View



Figure A-56: Post-Test Passenger Dummy Window View



Figure A-57: Pre-Test Passenger Dummy and Vehicle Interior View



Figure A-58: Post-Test Passenger Dummy and Vehicle Interior View

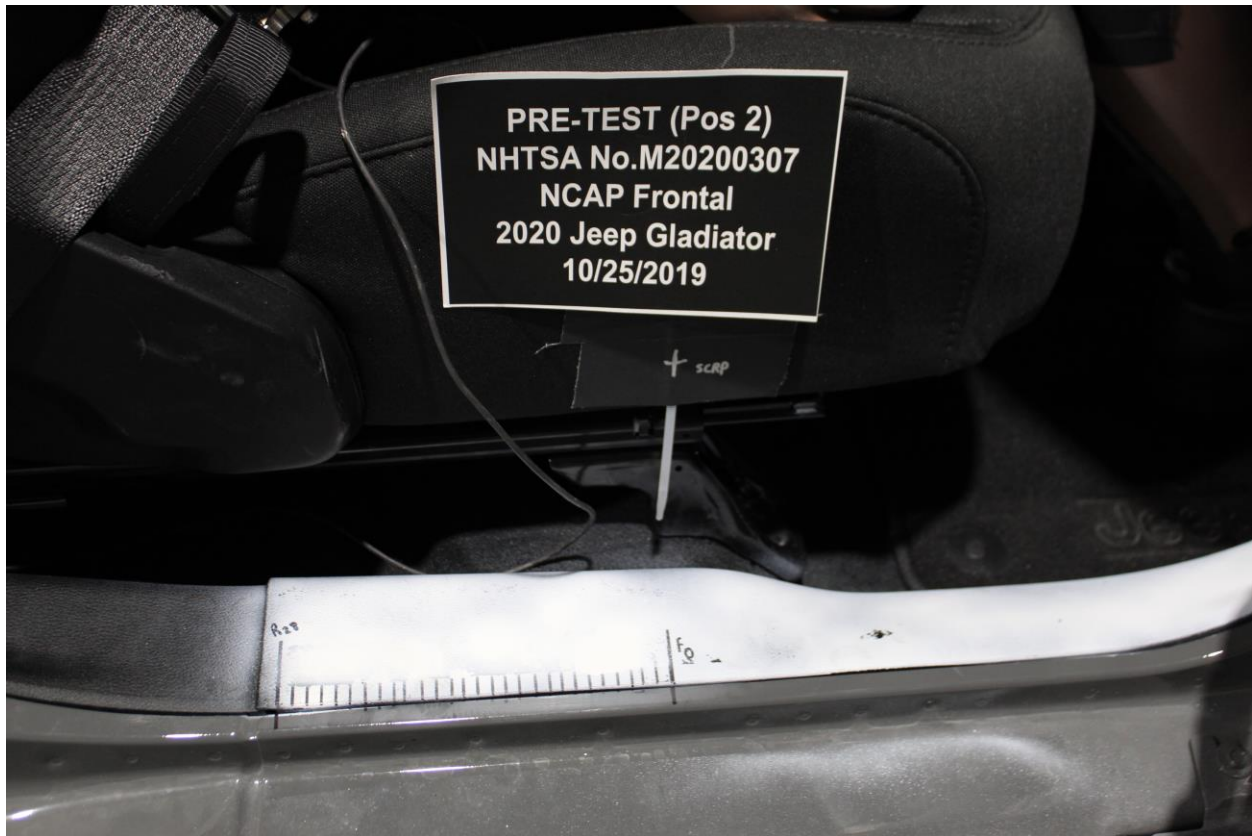


Figure A-59: Pre-Test Passenger's Seat Fore-Aft Markings



Figure A-60: Post-Test Passenger's Seat Fore-Aft Markings



Figure A-61: Pre-Test View of Belt Anchorage for Passenger Dummy



Figure A-62: Post-Test View of Belt Anchorage for Passenger Dummy



Figure A-63: Pre-Test View of Belt Buckle and Latch Plate for Passenger Dummy



Figure A-64: Post-Test View of Belt Buckle and Latch Plate for Passenger Dummy



Figure A-65: Pre-Test Passenger Dummy Feet



Figure A-66: Post-Test Passenger Dummy Feet

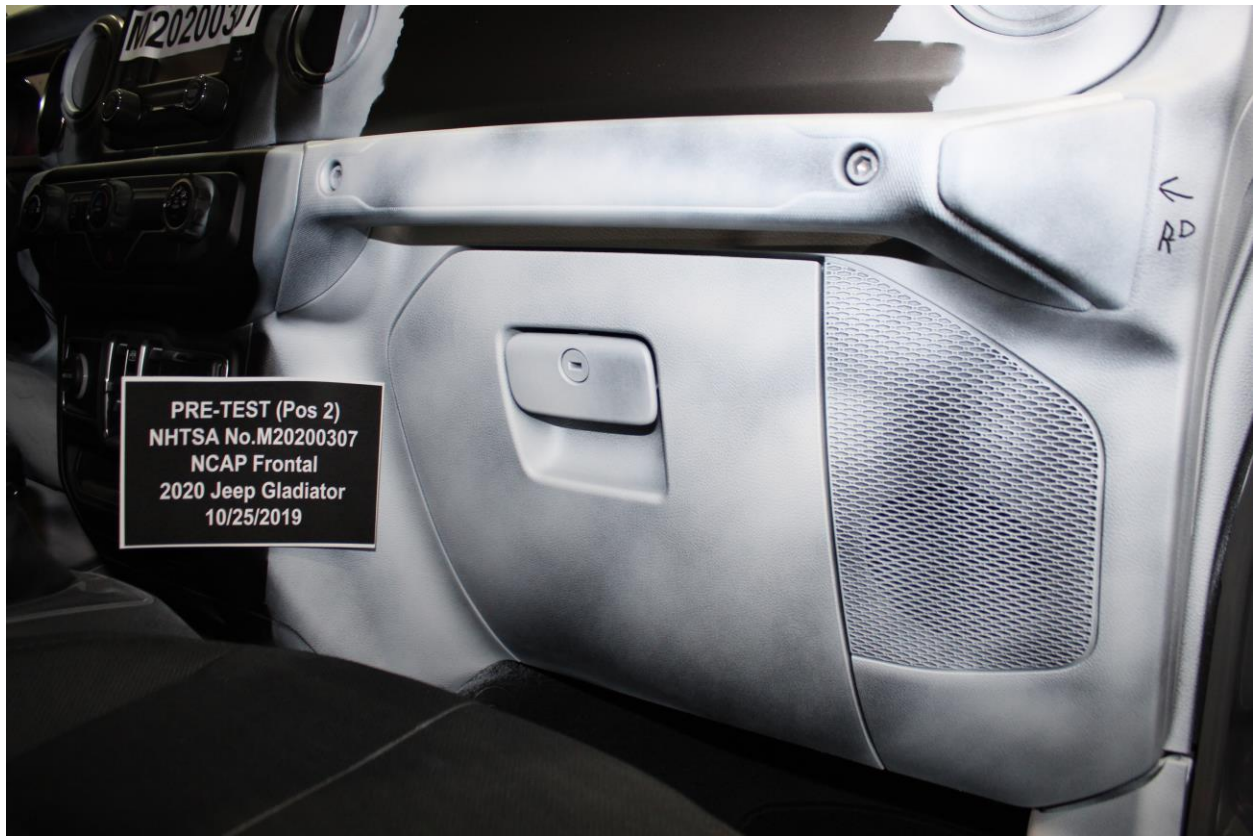


Figure A-67: Pre-Test Passenger's Side Knee Bolster



Figure A-68: Post-Test Passenger's Side Knee Bolster



Figure A-69: Pre-Test Passenger's Side Floorpan



Figure A-70: Post-Test Passenger's Side Floorpan



Figure A-71: Post-Test Passenger Dummy Face

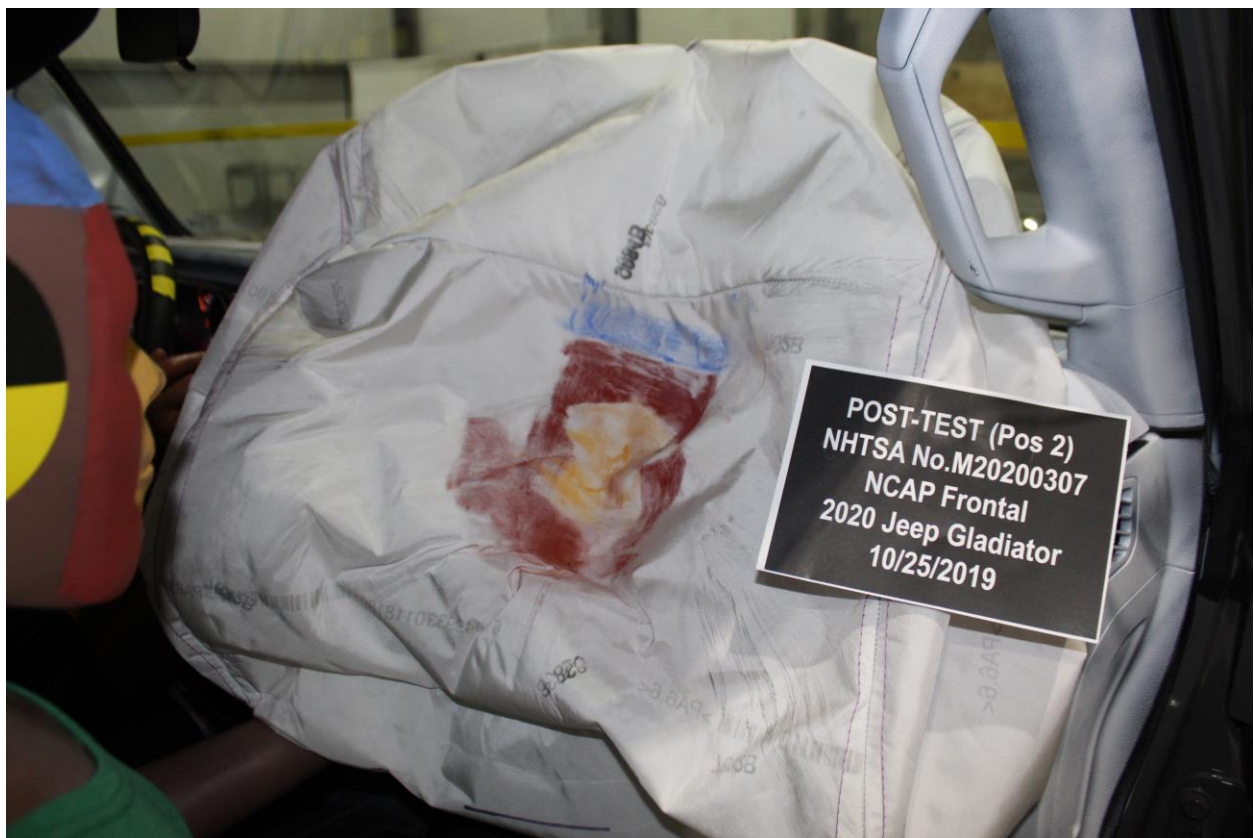


Figure A-72: Post-Test Passenger Dummy Contact With Airbag



Figure A-73: Post-Test Passenger Dummy Contact With Headrest

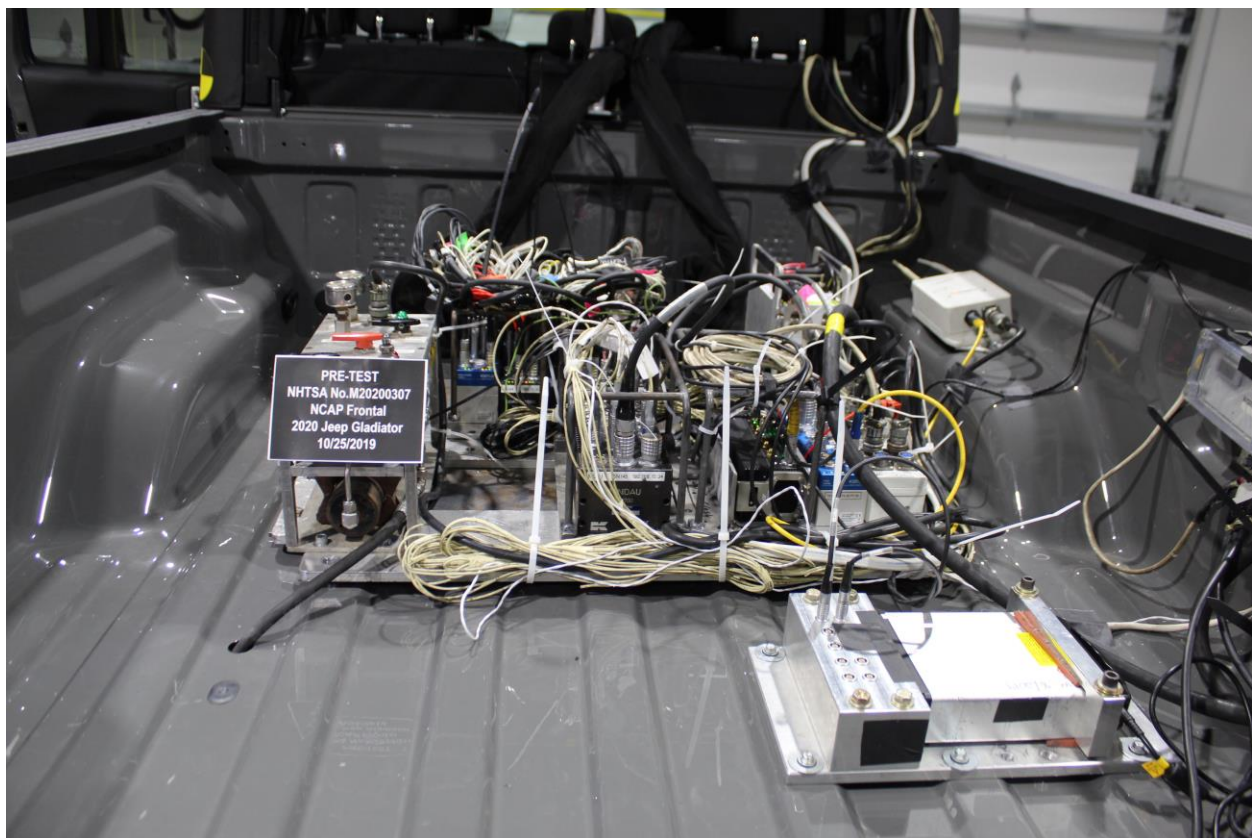


Figure A-74: Photograph of Ballast Installed in Vehicle

Photo Not Applicable

Figure A-75: Post-Test Stoddard Solvent Spillage Location View, If Required



Figure A-76: Post-Test Speed Trap Read-Out



Figure A-77: Vehicle at 0° on Static Rollover Device

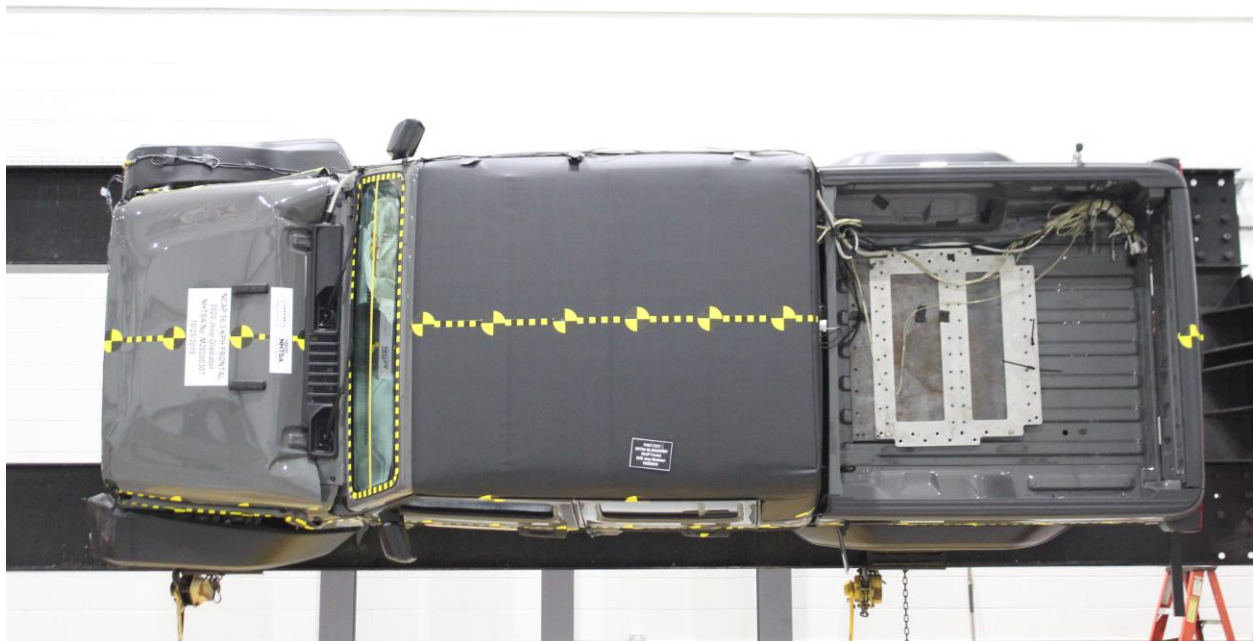


Figure A-78: Vehicle at 90° on Static Rollover Device



Figure A-79: Vehicle at 180° on Static Rollover Device



Figure A-80: Vehicle at 270° on Static Rollover Device



Figure A-81: Vehicle at 360° on Static Rollover Device



Figure A-82: 2020 Jeep Gladiator Frontal Impact Event

Jeep 2020 MODEL YEAR
JEEP GLADIATOR SPORT 4X4

For more information visit: www.jeep.com
or call 1-877-IAM-JEEP FCA US LLC

THIS VEHICLE IS MANUFACTURED TO MEET SPECIFIC UNITED STATES REQUIREMENTS. THIS VEHICLE IS NOT MANUFACTURED FOR SALE OR REGISTRATION OUTSIDE OF THE UNITED STATES.

MANUFACTURER'S SUGGESTED RETAIL PRICE OF THIS MODEL INCLUDING DEALER PREPARATION
Base Price: \$33,545

JEEP GLADIATOR SPORT 4X4
Exterior Color: Stamp Gray Clear-Coat Exterior Paint
Interior Color: Black Interior Color
Interior: Cloth Bucket Seats
Engine: 3.6L V6 24V VVT Engine w/ESS
Transmission: 6-Speed Manual Transmission

STANDARD EQUIPMENT (UNLESS REPLACED BY OPTIONAL EQUIPMENT)

FUNCTIONAL/SAFETY FEATURES
Advanced Multistage Front Air Bags
Supplemental Front Side Seat Air Bags
ParkView® Rear Back-Up Camera
Command-Trac® Part-Time 4WD System
Heavy-Duty Dana 44 Front Axle
Heavy-Duty Dana 44 Rear Axle
3.73 Axle Ratio
17-Inch x 7.5-Inch Black Steel Styled Wheels
245/75R17 All-Season Tires
Fuel Tank Skid Plate Shield
Transfer Case Skid Plate Shield
7-and 4-Pin Wiring Harness
Electronic Trailer Sway Control
Electronic Stability Control
Electronic Roll Mitigation
Speed Control
Tow Tool Kit
Push-Button Start
Location Specific Tire Pressure Monitoring Display

INTERIOR FEATURES
Uconnect® 3 with 5.0-Inch Touchscreen Display
Cluster 3.5-Inch Black and White Display
8-Speakers
Media Hub (USB, Aux)
Integrated Voice Command with Bluetooth®
12-Volt Auxiliary Power Outlet
Air Conditioning
Tilt/Telescope Steering Column
Steering Wheel Mounted Audio Controls
2-Way Manual Lumbar Adjustable Driver Seat
Lockable Behind Rear Seat Storage

LED Dome Lamp with On/Off Switch
Front and Rear Driver and Passenger Assist Handles
Manual Door Locks
Front and Rear Floor Mats
EXTERIOR FEATURES
Full-Size Spare Tire
Black Sunrider Soft Top
Front Fog Lamps
2-Front and 1-Rear Tow Hooks

OPTIONAL EQUIPMENT (May Replace Standard Equipment) **\$3,200**

Customer Preferred Package 23S
17-Inch x 7.5-Inch Tech Silver Aluminum Wheels
Power Windows with Front 1-Touch Down
Power Tailgate Lock
Speed Sensitive Power Locks
Power-Heated Mirrors
Remote Keyless Entry
Security Alarm
Leather-Wrapped Steering Wheel
Deep Tint Sunscreen Windows
Sun Visors with Illuminated Vanity Mirrors
Automatic Headlamps
Normal Duty Plus Suspension
All-Weather Slush Mats

DESTINATION CHARGE \$1,495

TOTAL PRICE: * \$38,405

WARRANTY COVERAGE
5-year or 60,000-mile Powertrain Limited Warranty,
3-year or 36,000-mile Basic Limited Warranty.
Ask Dealer for a copy of the limited warranties or see your owner's manual for details.

5 YEAR / 60,000 MILE POWERTRAIN WARRANTY

EPA DOT Fuel Economy and Environment Gasoline Vehicle

Fuel Economy These estimates reflect new EPA methods beginning with 2017 models. Standard pickups range from 12 to 26 MPG. The best vehicle rates 136 MPG.
19 16 23
combined city/hwy city highway
5.3 gallons per 100 miles

You spend \$3,250 more in fuel costs over 5 years compared to the average new vehicle.

Annual fuel Cost \$2,150

Fuel Economy & Greenhouse Gas Rating (tailpipe only) Best 1 3 10
This vehicle emits 476 grams CO2 per mile. The best emits 0 grams per mile (tailpipe only). Producing and distributing fuel also causes emissions. Learn more at fuelconomy.gov

Smog Rating (tailpipe only) Best 1 5 10
This vehicle emits 476 grams CO2 per mile. The best emits 0 grams per mile (tailpipe only). Producing and distributing fuel also causes emissions. Learn more at fuelconomy.gov

Actual results will vary for many reasons, including driving conditions and how you drive and maintain your vehicle. The average new vehicle gets 27 MPG and cost \$7,500 to fuel over 5 years. Cost estimates are based on 15,000 miles per year at \$2.70 per gallon. MPG is miles per gallon equivalent. Vehicle emissions are a significant cause of climate change and smog.

fuelconomy.gov
Calculate personalized estimates and compare vehicles.

GOVERNMENT 5-STAR SAFETY RATINGS

This vehicle has not been rated by the government for overall vehicle score, frontal crash, side crash or rollover risk.

Source: National Highway Traffic Safety Administration (NHTSA)
www.safercar.gov or 1-888-327-4236

PARTS CONTENT INFORMATION
FOR VEHICLES IN THIS CARLINE:
U.S./CANADIAN PARTS CONTENT: 61%
MAJOR SOURCES OF FOREIGN PARTS CONTENT:
MEXICO: 21%
NOTE: PARTS CONTENT DOES NOT INCLUDE FINAL ASSEMBLY, DISTRIBUTION, OR OTHER NON-PARTS COSTS.

FOR THIS VEHICLE:
FINAL ASSEMBLY POINT:
TOLEDO, OHIO, U.S.A.
COUNTRY OF ORIGIN:
ENGINE: MEXICO
TRANSMISSION: JAPAN

MOBIL **VEHICLE PROTECTION**
A PRODUCT BY FCA US LLC
Ask for Mobil Vehicle Protection for your vehicle. We Built It. We Back It.

Assembly Plant/Port of Entry: TOLEDO, OHIO, U.S.A.
VIN: 1C6JTAG6LL-143639
SALES TAX: 2273

SHIPPED BY: 63722-50 MILLER MOTOR SALES INC. 1708 MILLER AVE. BURLINGTON, WI 53105-1367
SOLD BY: 61 51710 MILLER MOTOR SALES INC. 1708 MILLER AVE. BURLINGTON, WI 53105-1367
THIS LABEL IS ADDED TO THIS VEHICLE TO COMPLY WITH FEDERAL LAW. THE LABEL CANNOT BE REMOVED OR ALTERED PRIOR TO DELIVERY TO THE ULTIMATE PURCHASER.
*SALES TAXES, LOCAL TAXES IF ANY, LICENSE AND TITLE FEES AND DEALER SUPPLIED AND INSTALLED OPTIONS AND ACCESSORIES ARE NOT INCLUDED IN THIS PRICE. DISCOUNT, IF ANY, IS BASED ON PRICE OF OPTION IF PURCHASED SEPARATELY.

Figure A-83: Monroney Label Photograph

APPENDIX B
VEHICLE & DUMMY RESPONSE DATA TRACES

Table of Data Plots





No.	Description	Page
Plot 1	Driver Head X Acceleration vs. Time Primary	B-5
Plot 2	Driver Head Y Acceleration vs. Time Primary	B-5
Plot 3	Driver Head Z Acceleration vs. Time Primary	B-5
Plot 4	Driver Head Resultant Acceleration vs. Time Primary	B-5
Plot 5	Driver Chest X Deflection vs. Time	B-6
Plot 6	Driver Chest X Acceleration vs. Time Primary	B-6
Plot 7	Driver Chest Y Acceleration vs. Time Primary	B-6
Plot 8	Driver Chest Z Acceleration vs. Time Primary	B-6
Plot 9	Driver Chest Resultant Acceleration vs. Time Primary	B-7
Plot 10	Driver Upper Neck Force X vs. Time Primary	B-7
Plot 11	Driver Upper Neck Force Z vs. Time Primary	B-7
Plot 12	Driver Upper Neck Moment Y vs. Time Primary	B-7
Plot 13	Driver Nij vs. Time Primary	B-8
Plot 14	Driver Left Femur Force vs. Time	B-8
Plot 15	Driver Right Femur Force vs. Time	B-8
Plot 16	Passenger Head X Acceleration vs. Time Primary	B-8
Plot 17	Passenger Head Y Acceleration vs. Time Primary	B-9
Plot 18	Passenger Head Z Acceleration vs. Time Primary	B-9
Plot 19	Passenger Head Resultant Acceleration vs. Time Primary	B-9
Plot 20	Passenger Chest X Deflection vs. Time	B-9
Plot 21	Passenger Chest X Acceleration vs. Time Primary	B-10
Plot 22	Passenger Chest Y Acceleration vs. Time Primary	B-10
Plot 23	Passenger Chest Z Acceleration vs. Time Primary	B-10
Plot 24	Passenger Chest Resultant Acceleration vs. Time Primary	B-10
Plot 25	Passenger Upper Neck Force X vs. Time Primary	B-11
Plot 26	Passenger Upper Neck Force Z vs. Time Primary	B-11
Plot 27	Passenger Upper Neck Moment Y vs. Time Primary	B-11
Plot 28	Passenger Nij vs. Time Primary	B-11
Plot 29	Passenger Left Femur Force vs. Time	B-12
Plot 30	Passenger Right Femur Force vs. Time	B-12





The following additional dummy and vehicle response data can be found in the R&D section of the NHTSA website at www.nhtsa.gov

Driver Head X Acceleration Redundant
 Driver Head Y Acceleration Redundant
 Driver Head Z Acceleration Redundant
 Driver Upper Neck Force Y
 Driver Upper Neck Moment X
 Driver Upper Neck Moment Z
 Driver Chest X Acceleration Redundant
 Driver Chest Y Acceleration Redundant
 Driver Chest Z Acceleration Redundant
 Driver Pelvis X
 Driver Pelvis Y
 Driver Pelvis Z
 Driver Left Femur Redundant
 Driver Right Femur Redundant
 Driver Left Upper Tibia Moment X
 Driver Left Upper Tibia Moment Y


Driver Left Upper Tibia Force Z
Driver Left Lower Tibia Moment X
Driver Left Lower Tibia Moment Y
Driver Left Lower Tibia Force Z
Driver Right Upper Tibia Moment X
Driver Right Upper Tibia Moment Y
Driver Right Upper Tibia Force Z
Driver Right Lower Tibia Moment X
Driver Right Lower Tibia Moment Y
Driver Right Lower Tibia Force Z
Driver Left Foot Fore Z
Driver Left Foot Aft X
Driver Left Foot Aft Z
Driver Right Foot Fore Z
Driver Right Foot Aft X
Driver Right Foot Aft Z
Driver Shoulder Belt Force
Driver Lap Belt Force
Driver Head Angular Velocity X
Driver Head Angular Velocity Y
Driver Head Angular Velocity Z
Passenger Head X Acceleration Redundant
Passenger Head Y Acceleration Redundant
Passenger Head Z Acceleration Redundant
Passenger Upper Neck Force X
Passenger Upper Neck Force Z
Passenger Upper Neck Moment Y
Passenger Chest X Acceleration Redundant
Passenger Chest Y Acceleration Redundant
Passenger Chest Z Acceleration Redundant
Passenger Pelvis X
Passenger Pelvis Y
Passenger Pelvis Z
Passenger Left Femur Redundant
Passenger Right Femur Redundant
Passenger Left Upper Tibia Moment X
Passenger Left Upper Tibia Moment Y
Passenger Left Upper Tibia Force Z
Passenger Left Lower Tibia Moment X
Passenger Left Lower Tibia Moment Y
Passenger Left Lower Tibia Force Z
Passenger Right Upper Tibia Moment X
Passenger Right Upper Tibia Moment Y
Passenger Right Upper Tibia Force Z
Passenger Right Lower Tibia Moment X
Passenger Right Lower Tibia Moment Y
Passenger Right Lower Tibia Force Z
Passenger Left Foot Fore Z
Passenger Left Foot Aft X
Passenger Left Foot Aft Z

Passenger Right Foot Fore Z
Passenger Right Foot Aft X
Passenger Right Foot Aft Z
Passenger Shoulder Belt Force
Passenger Lap Belt Force
Passenger Head Angular Velocity X
Passenger Head Angular Velocity Y
Passenger Head Angular Velocity Z
Left Rear Seat Crossmember X
Left Rear Seat Crossmember Z
Right Rear Seat Crossmember X
Right Rear Seat Crossmember Z
Left Rear Seat Crossmember X Redundant
Right Rear Seat Crossmember X Redundant
Vehicle Engine Top X
Vehicle Engine Bottom X
Load Cell Barrier Forces and Moments

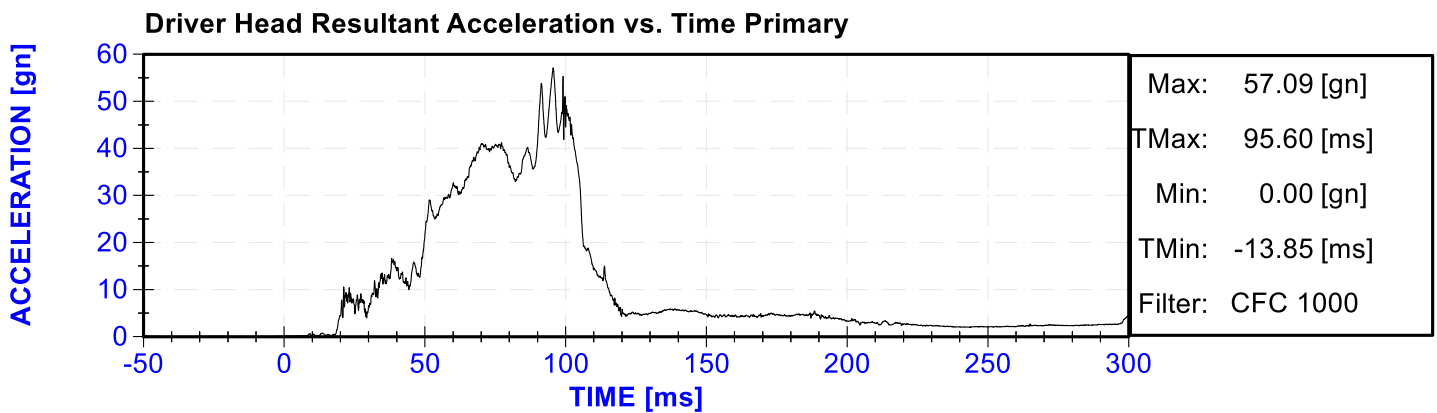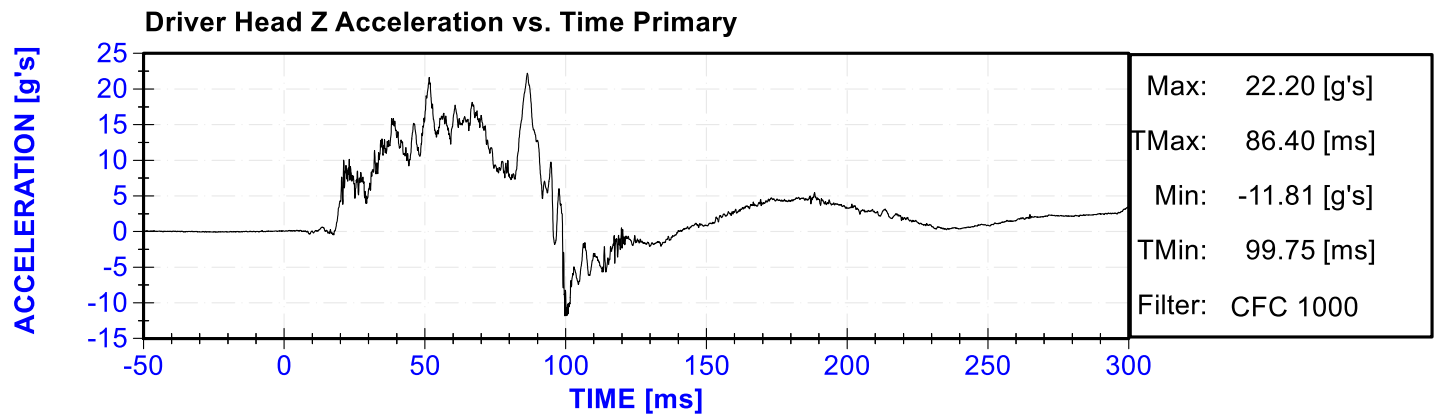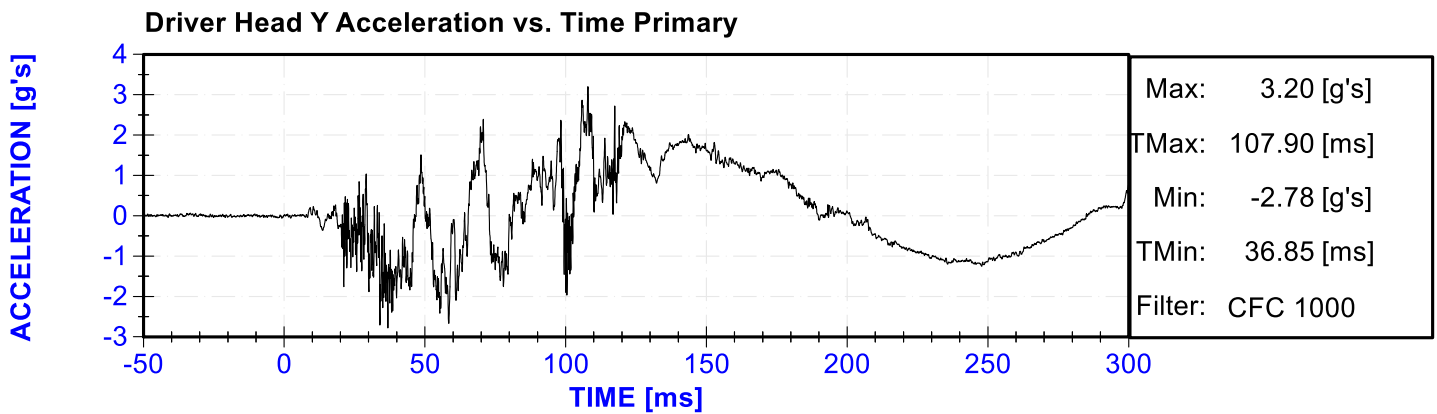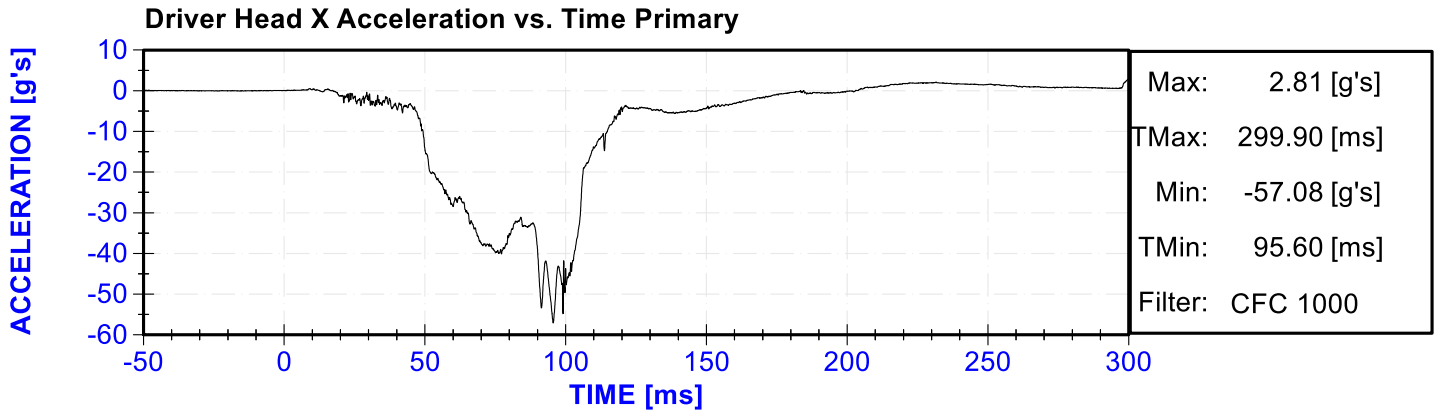


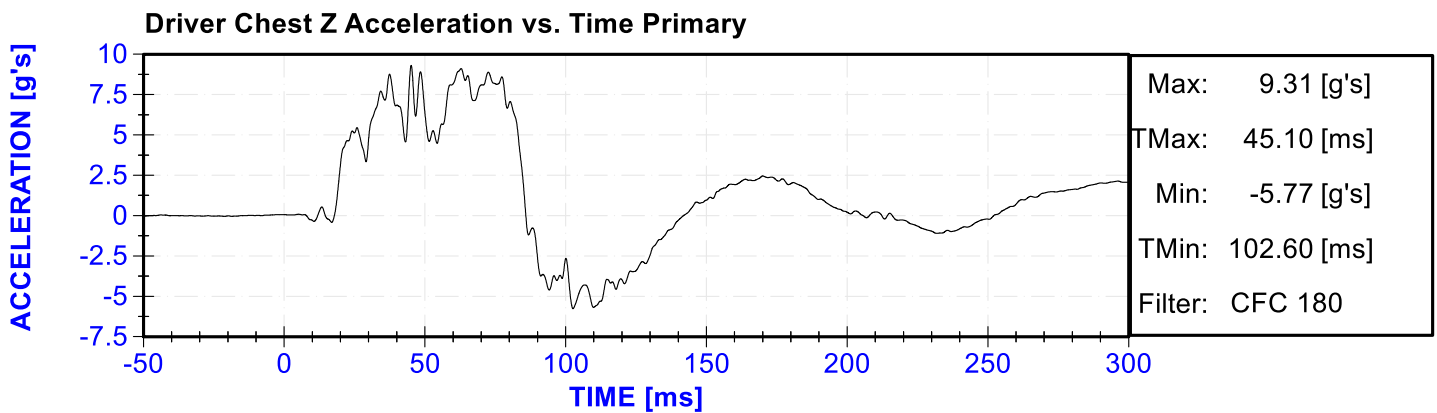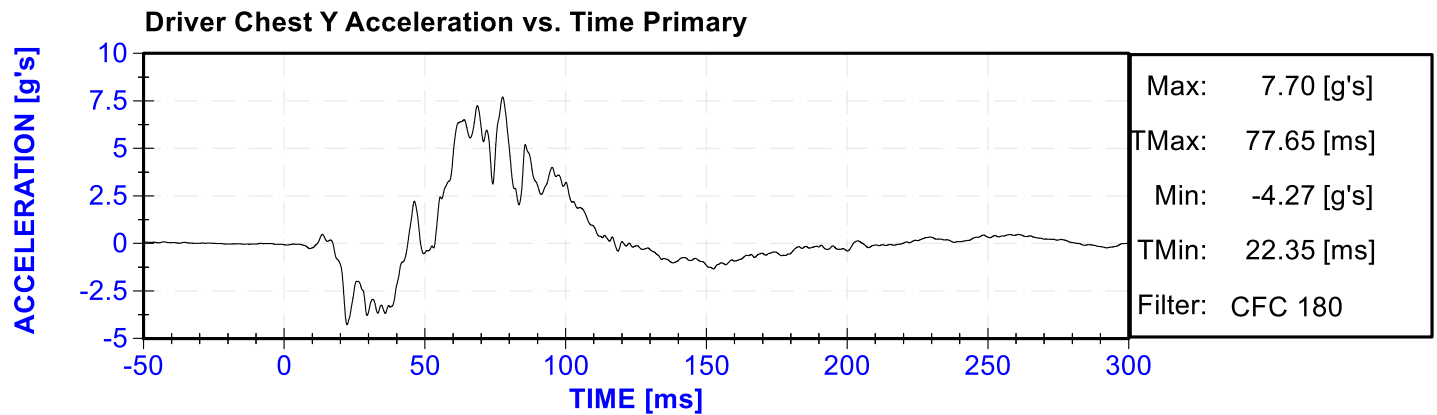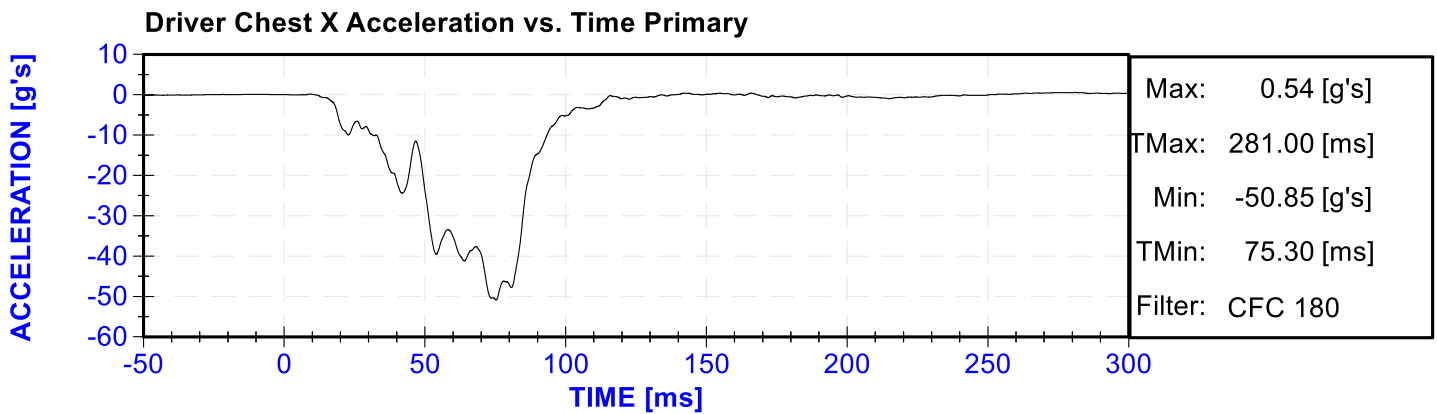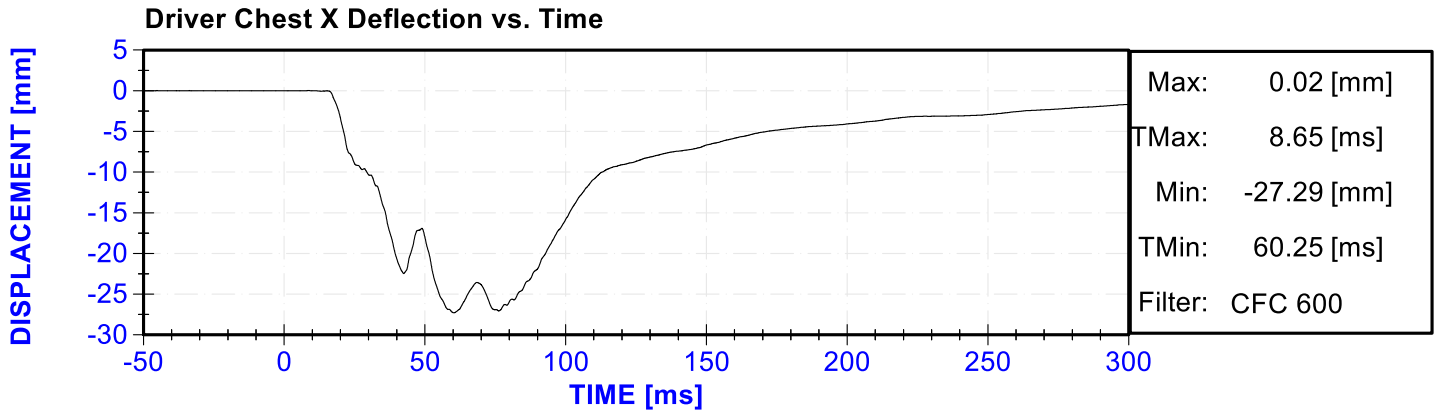


Driver Chest Resultant Acceleration vs. Time Primary

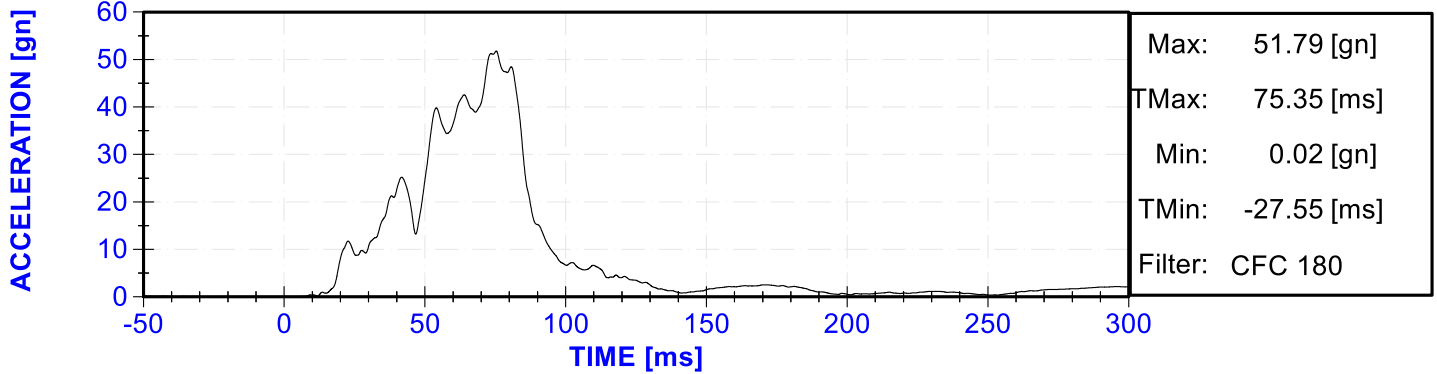


Driver Upper Neck Force X vs. Time Primary




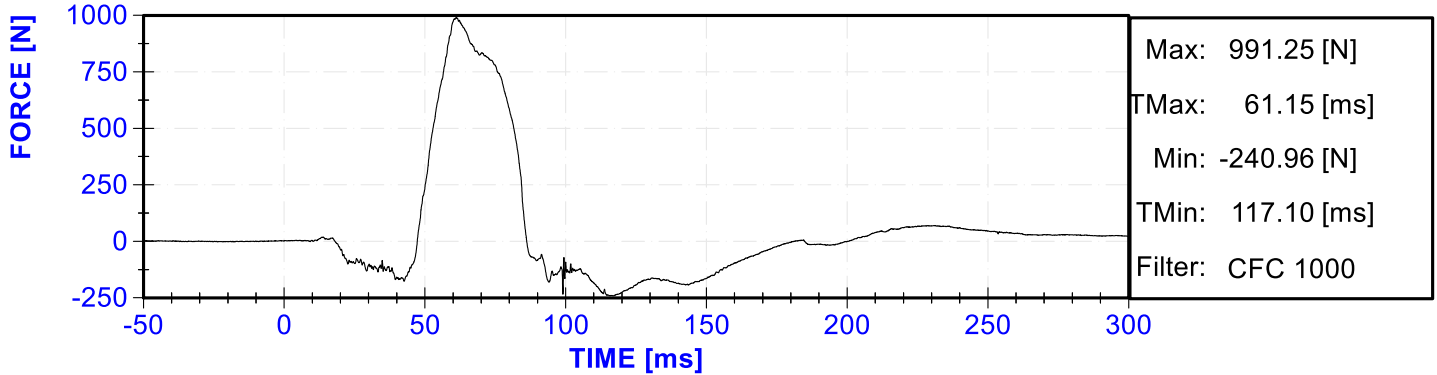






Driver Upper Neck Force Z vs. Time Primary




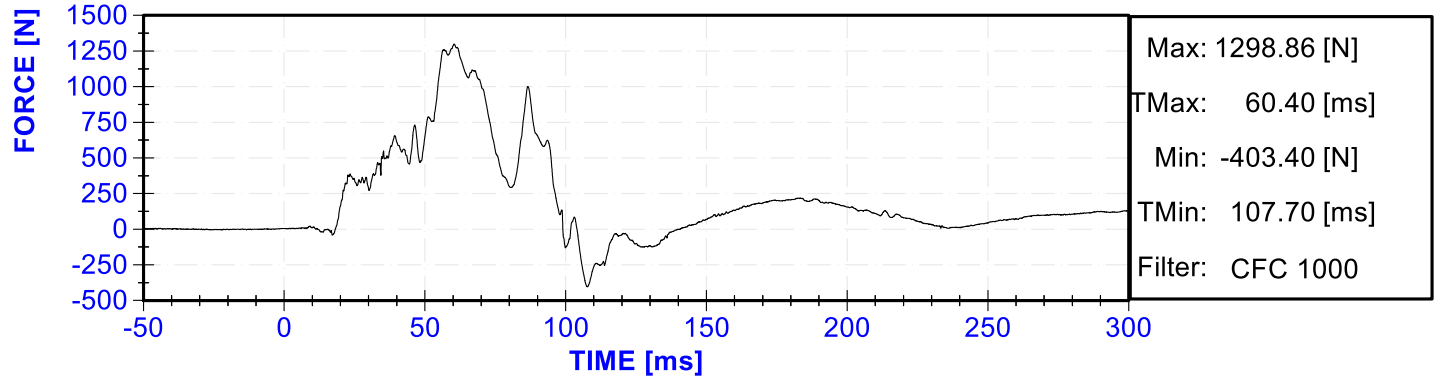






Driver Upper Neck Moment Y vs. Time Primary


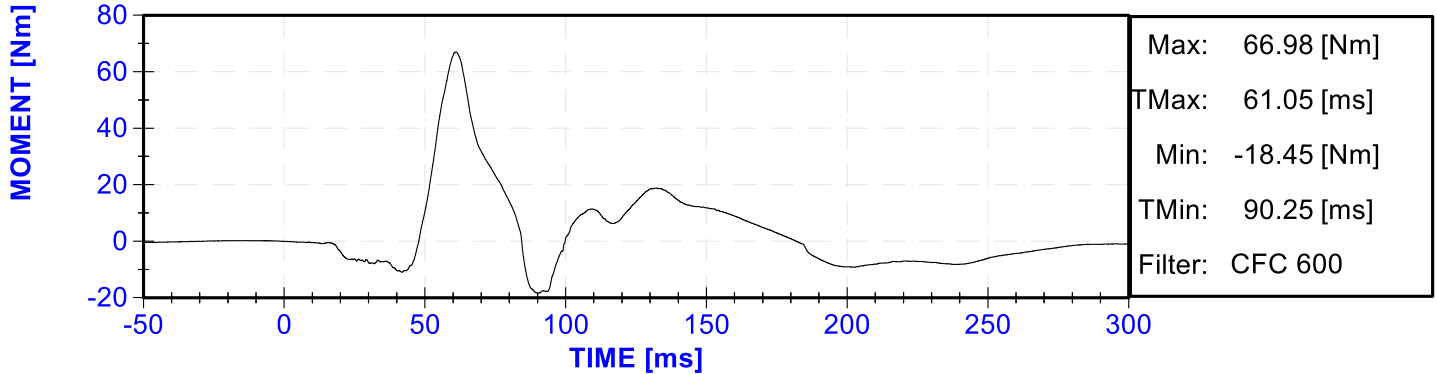


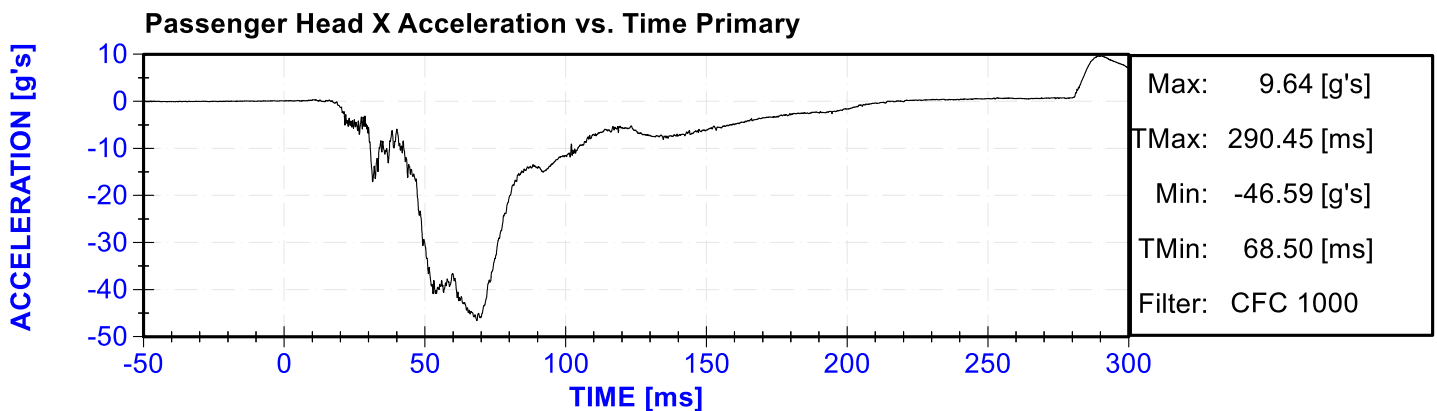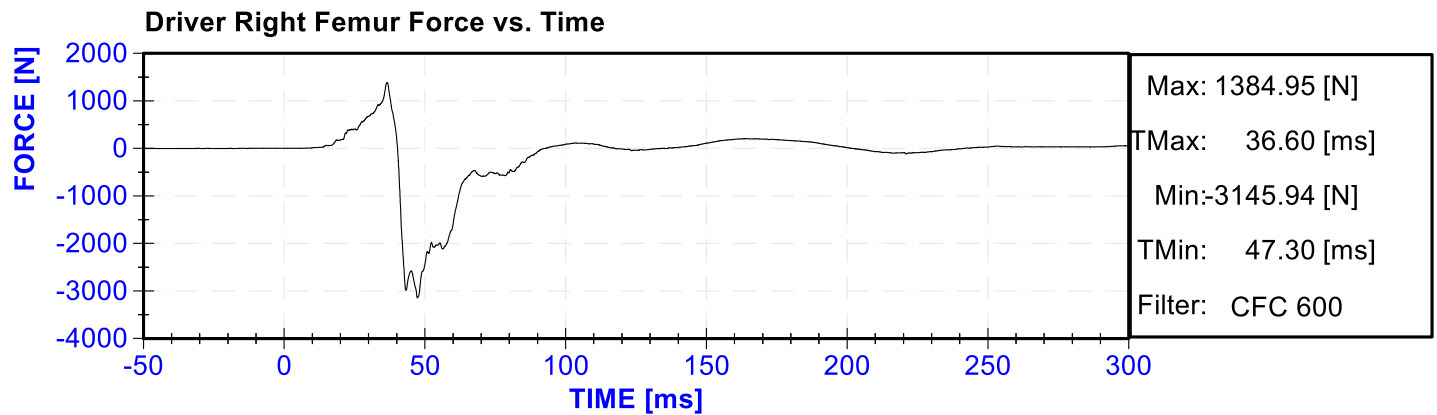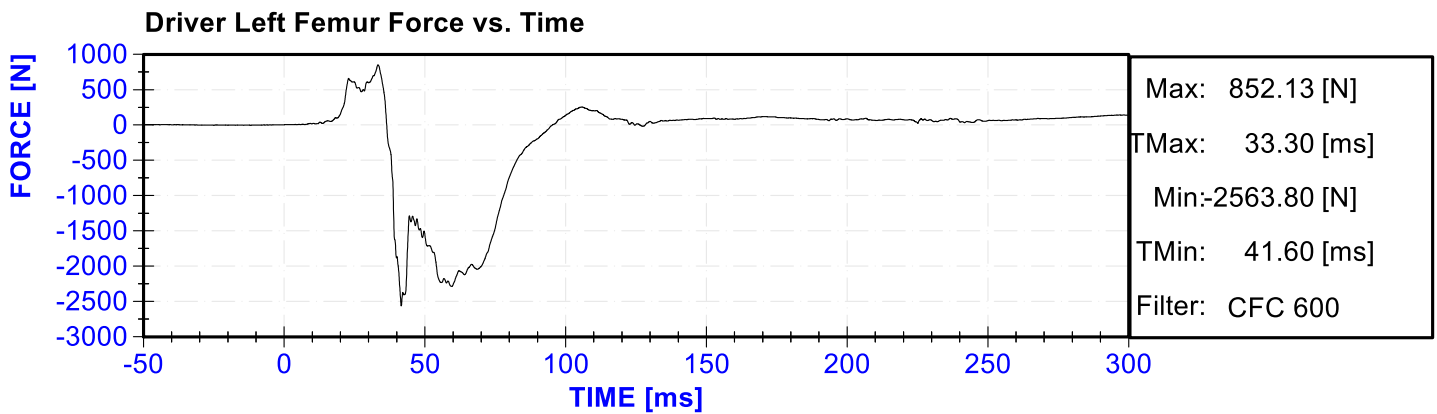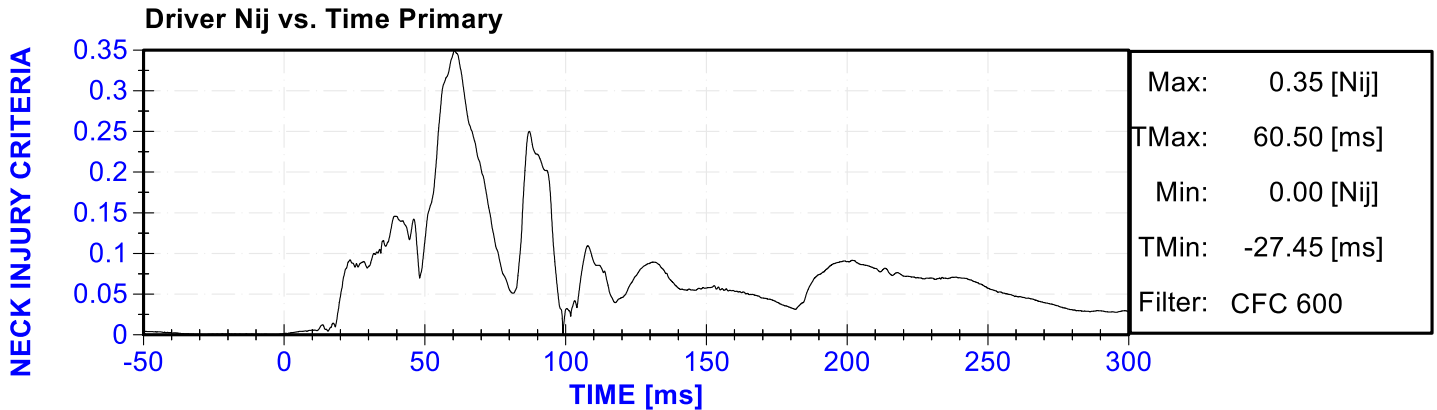

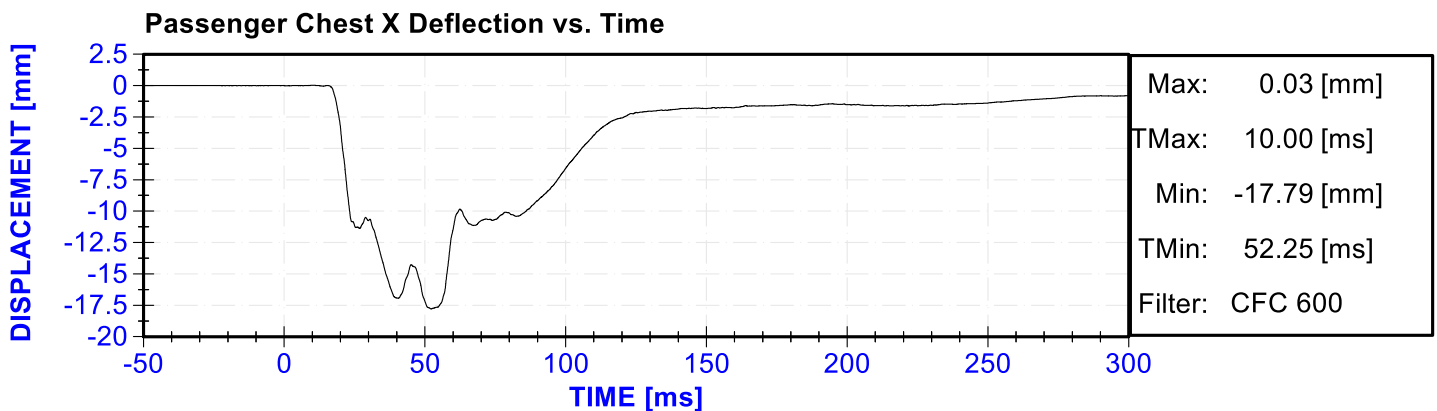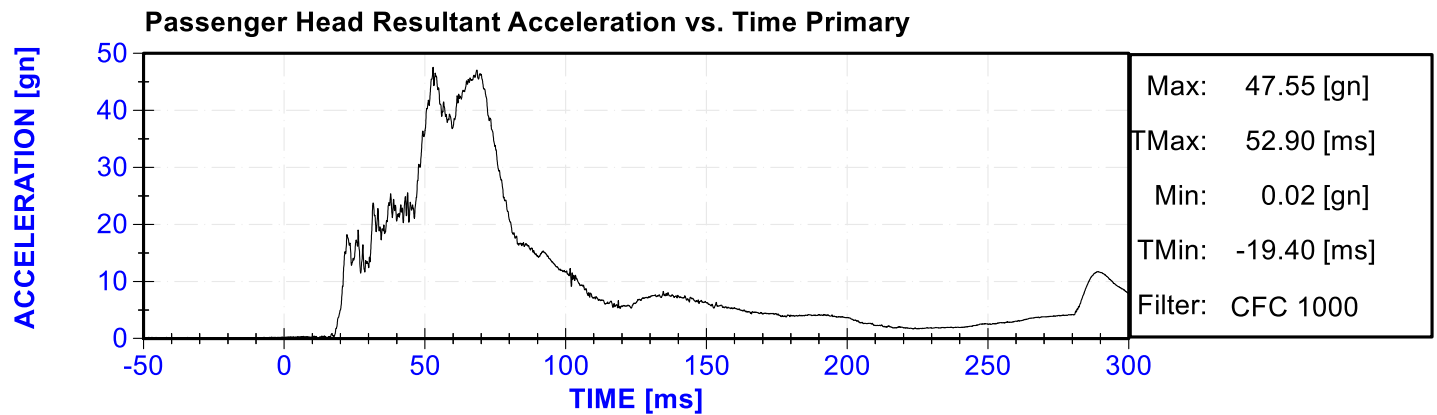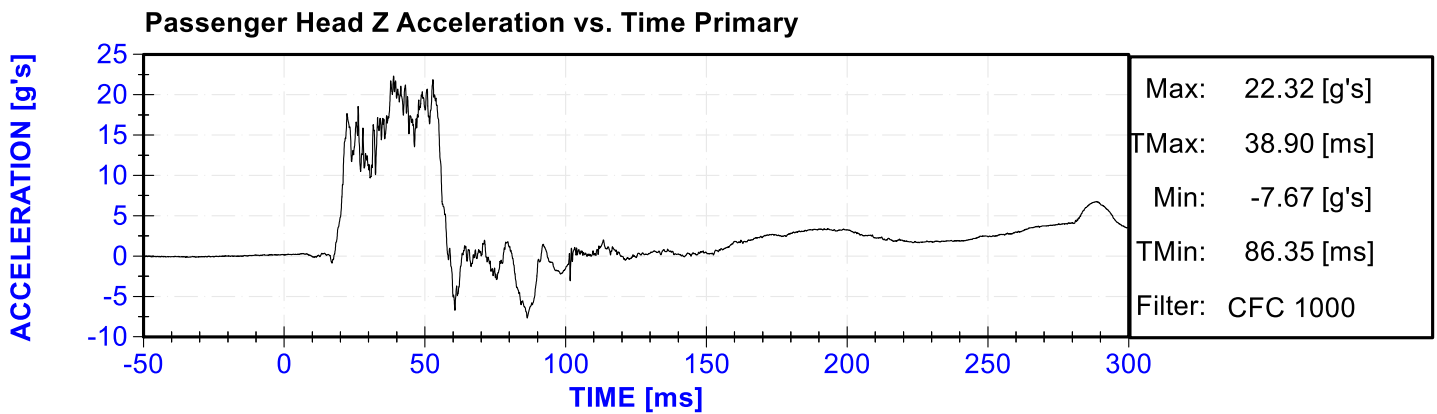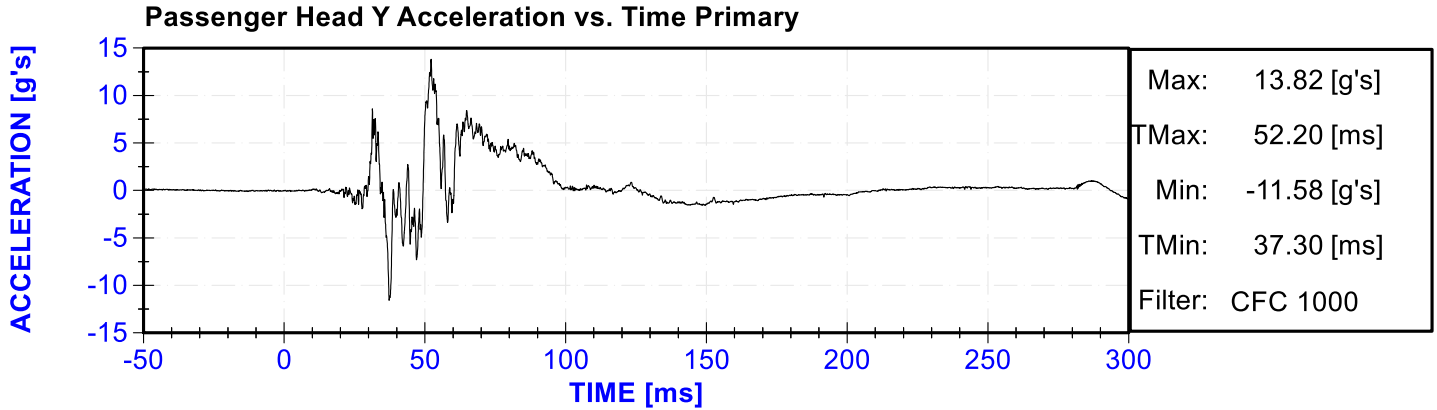

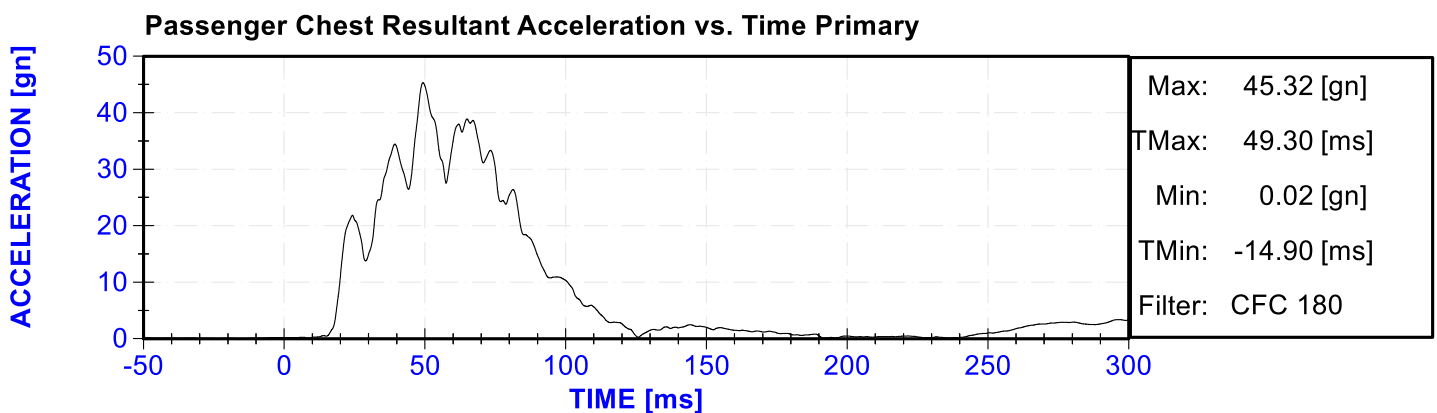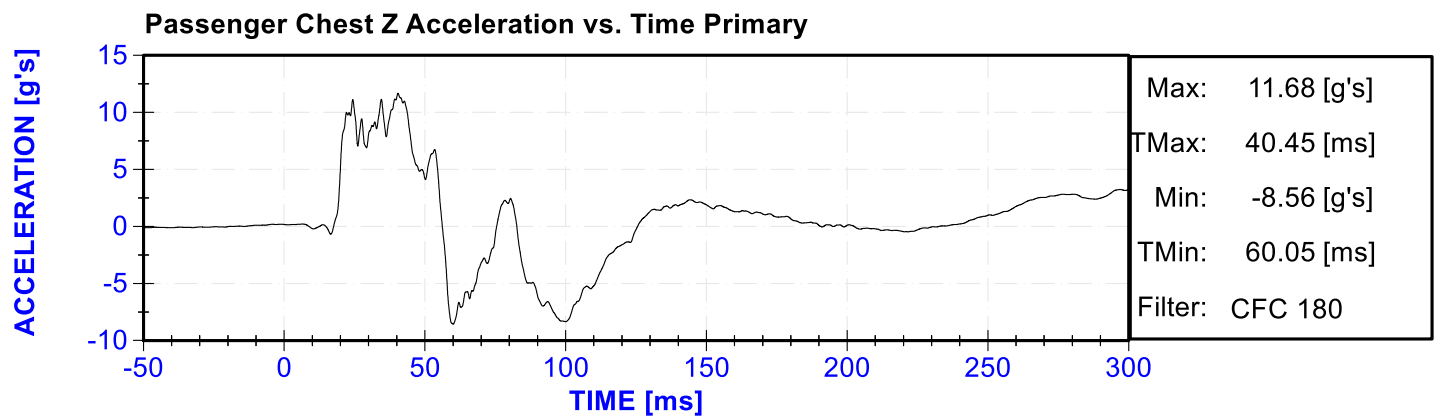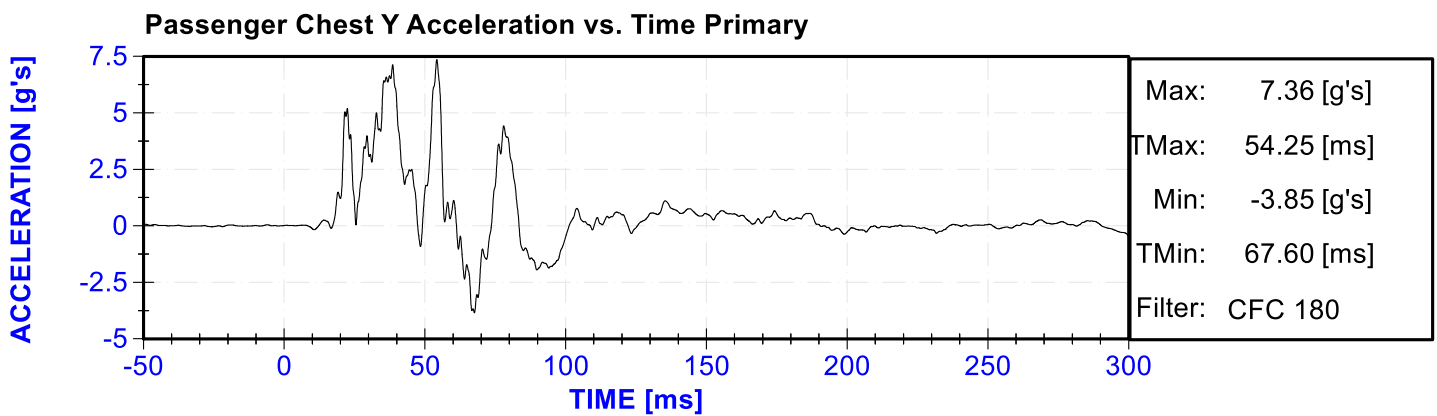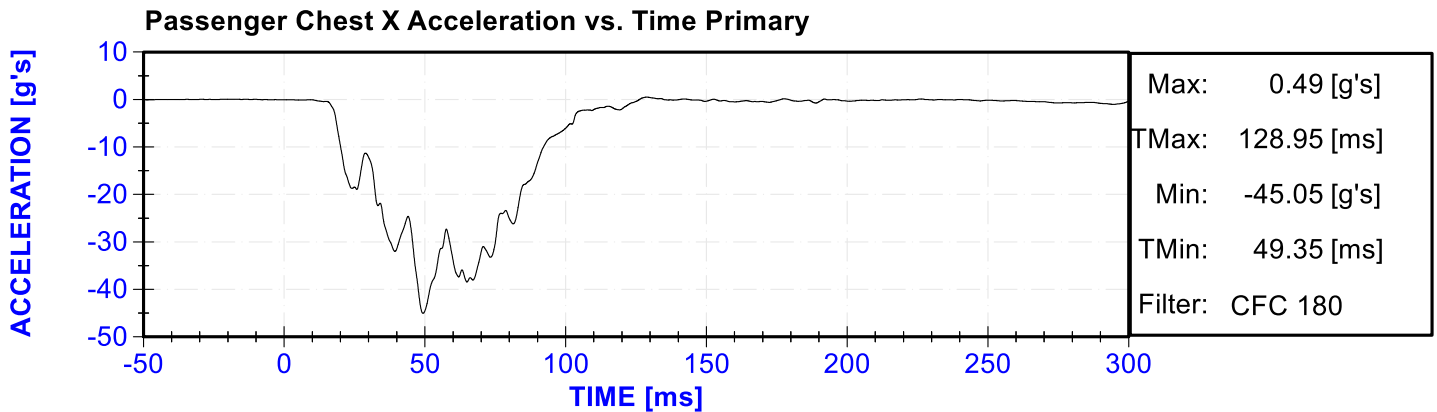

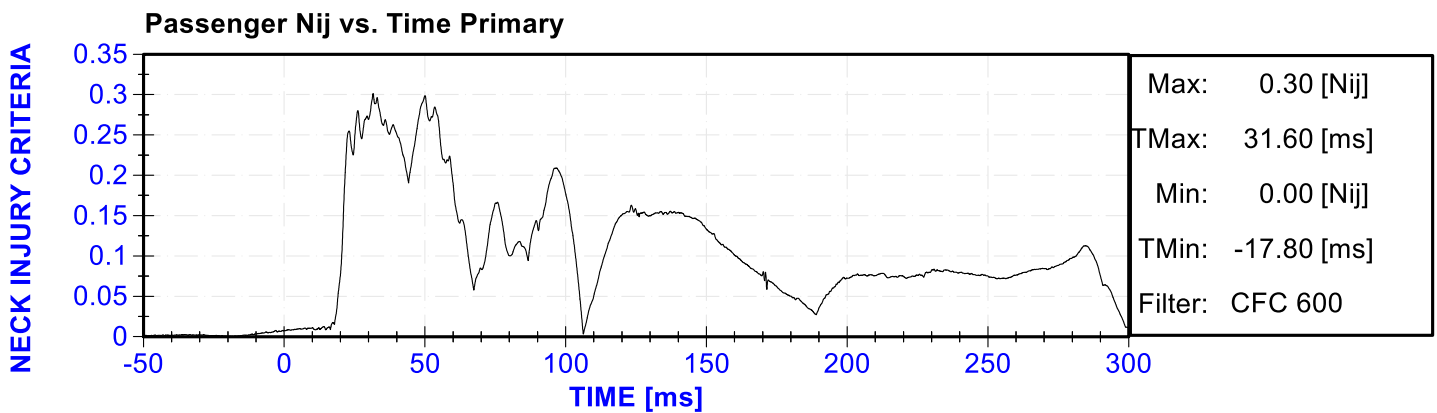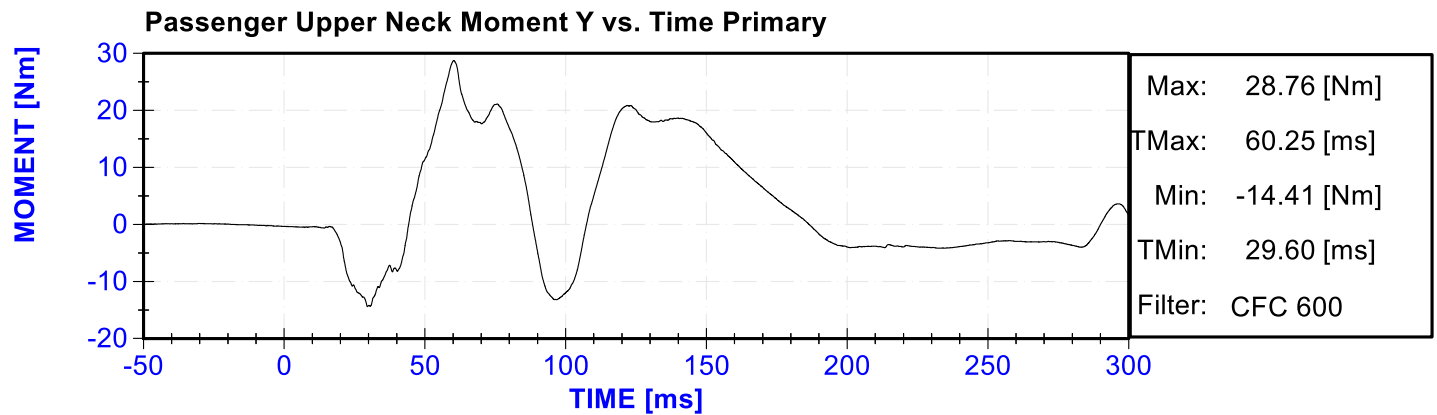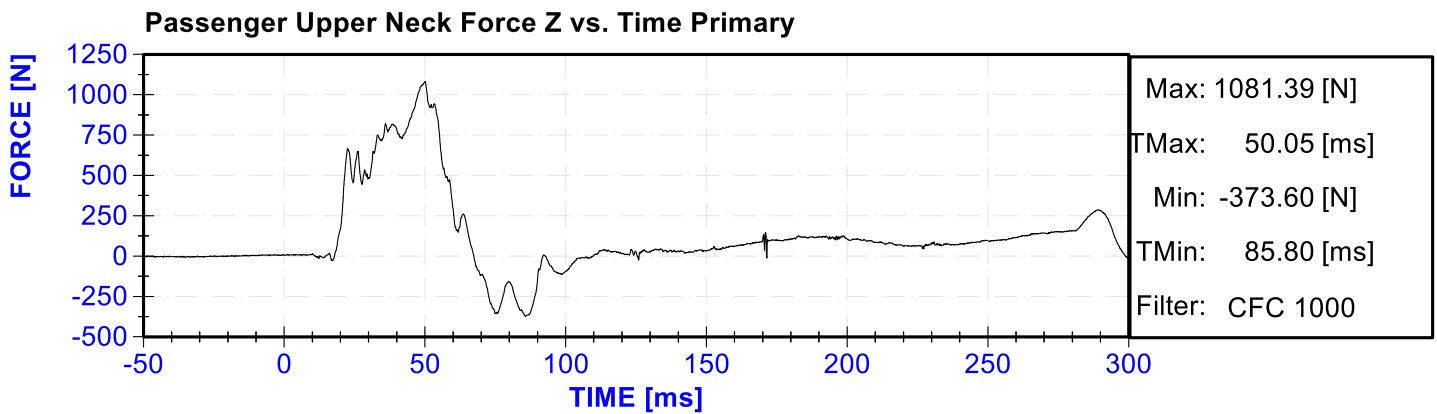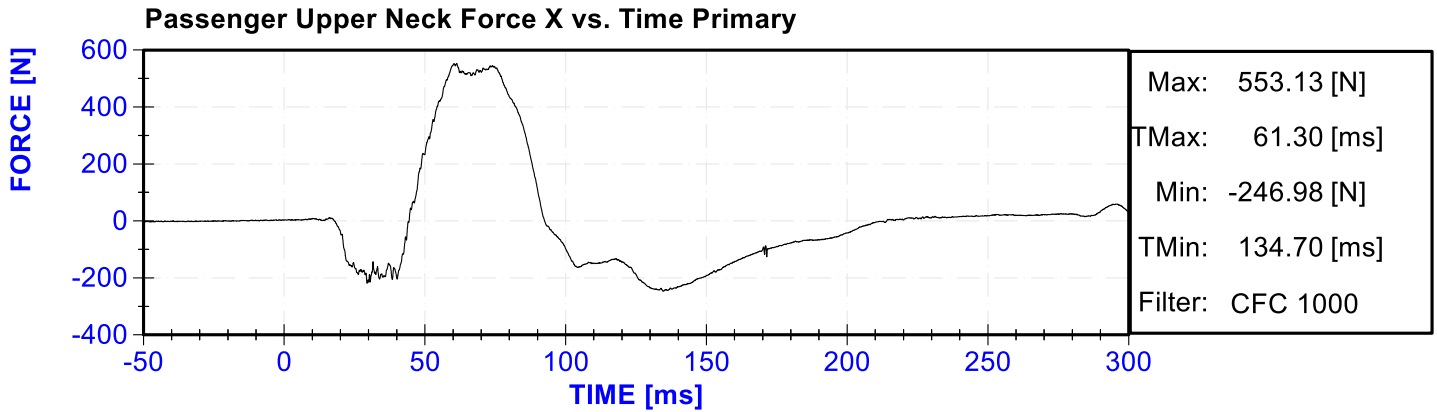

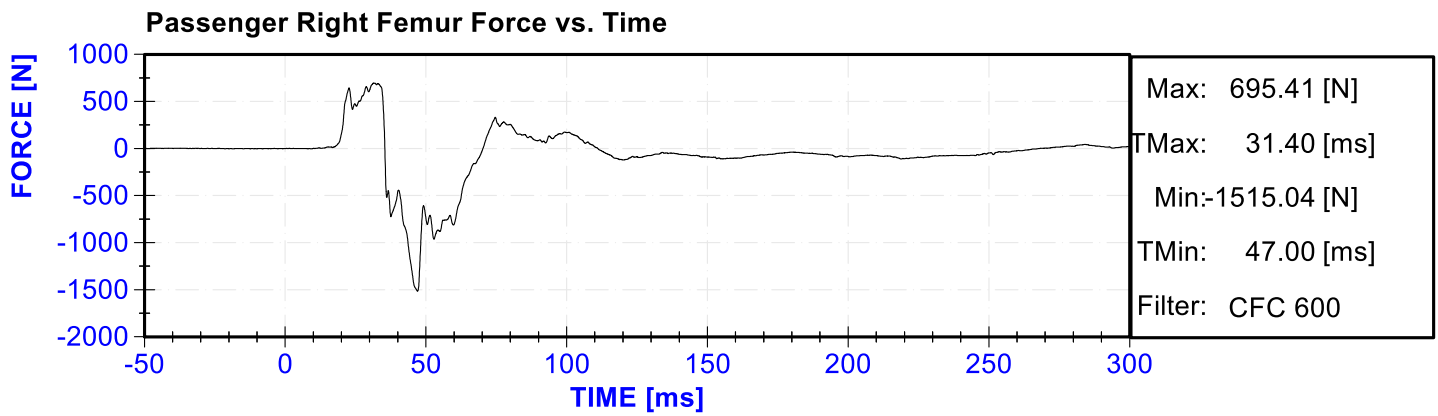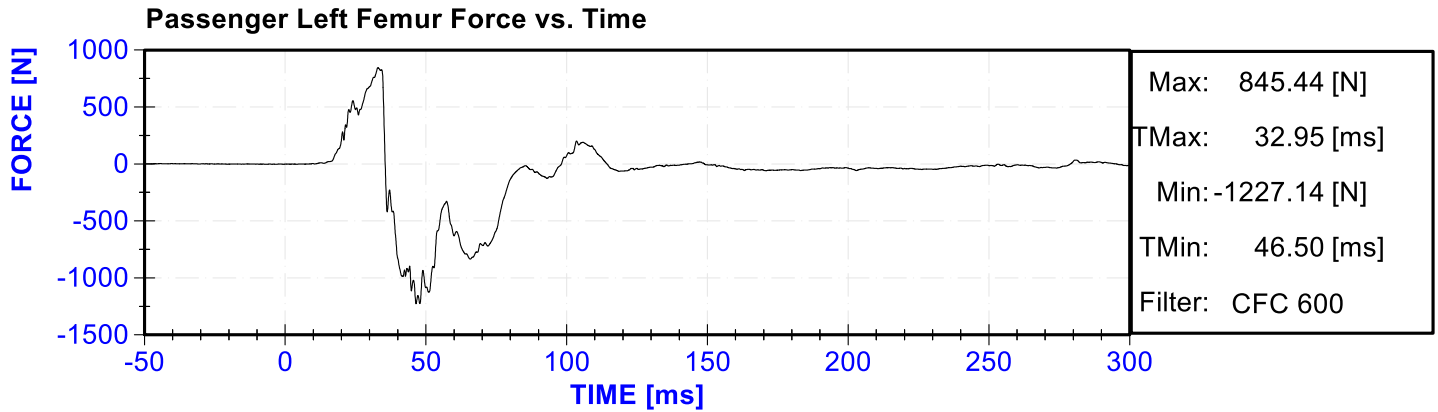

APPENDIX C

DUMMY CALIBRATION AND PERFORMANCE VERIFICATION DATA

CALIBRATION TEST RESULTS

PRE-TEST

HYBRID III 50TH PERCENTILE MALE - DRIVER ATD

SERIAL NO: 142




External Measurements - Hybrid 3 - 50th Male

Technician: K. Dutton

Date: 10/15/2019

Dummy Serial Number: 142

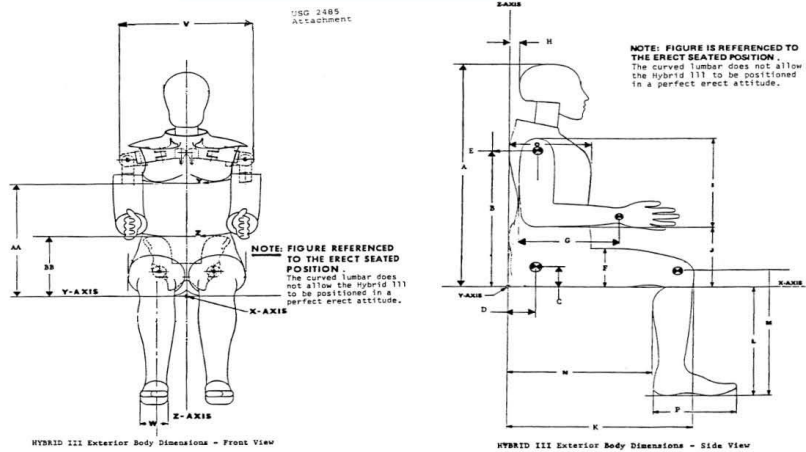

Symbol	Description	Specification (in)		Result (in)	Pass/Fail
A	Sitting Height	34.6	35.0	34.8	Pass
B	Shoulder Pivot Height	19.9	20.5	20.2	Pass
C	H-Point Height	3.3	3.5	3.4	Pass
D	H-Point from Backline	5.3	5.5	5.4	Pass
E	Shoulder Pivot from Backline	3.3	3.7	3.5	Pass
F	Thigh Clearance	5.5	6.1	5.6	Pass
G	Back of Elbow to Wrist Pivot	11.4	12.0	11.7	Pass
H	Head Back to Backline	1.6	1.8	1.7	Pass
I	Shoulder to Elbow Length	13.0	13.6	13.5	Pass
J	Elbow Rest Height	7.5	8.3	8.2	Pass
K	Buttock to Knee Length	22.8	23.8	23.4	Pass
L	Popliteal Height	16.9	17.9	17.4	Pass
M	Knee Pivot Height	19.1	19.7	19.4	Pass
N	Buttock Popliteal Length	17.8	18.8	18.5	Pass
O	Chest Depth without Jacket	8.4	9.0	8.6	Pass
P	Foot Length (right)	9.9	10.5	10.3	Pass
V	Shoulder Breadth	16.3	17.2	16.8	Pass
W	Foot Breadth	3.6	4.2	3.9	Pass
Y	Chest Circumference with Jacket	38.2	39.4	38.9	Pass
Z	Waist Circumference	32.9	34.1	33.7	Pass
AA	Reference Location (Chest Circumference)	16.9	17.1	17.0	Pass
BB	Reference Location (Waist Circumference)	8.9	9.1	9.0	Pass


ATD Manufacturer	Humanetics	Test Technician	E. Helenbrook
ATD Serial Number	142	Laboratory Supervisor	K. Brogan




Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	18.9	25.6	°C	21	Pass
Humidity	10	70	%	40	Pass
Resultant Acceleration	225	275	g's	243.0	Pass
Oscillation	0	10	%	5.4	Pass
Lateral Acceleration	-15	15	g's	-6.0	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
X Accelerometer	Endevco	P51681	8/13/2019	2/13/2020
Y Accelerometer	Endevco	P64151	8/13/2019	2/13/2020
Z Accelerometer	Endevco	P52114	8/13/2019	2/13/2020

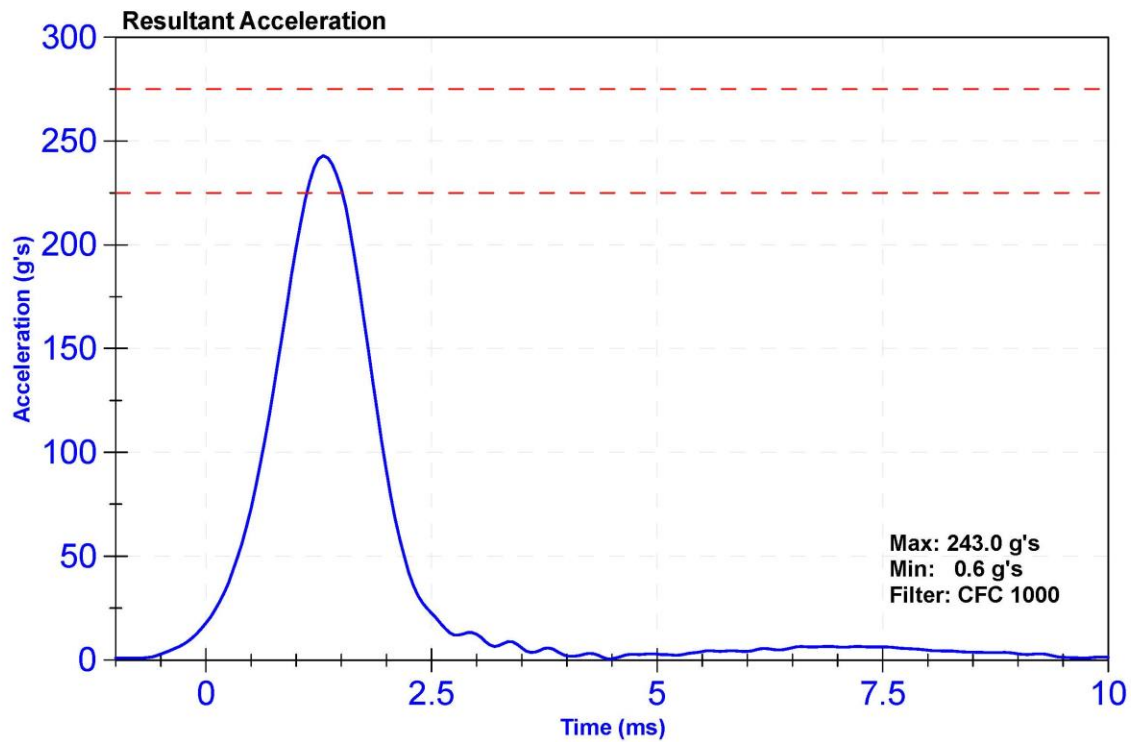

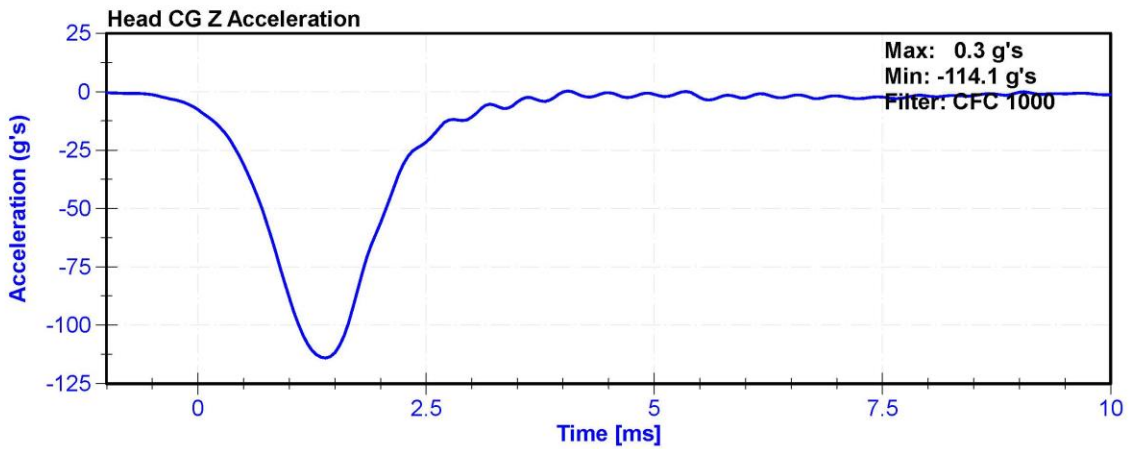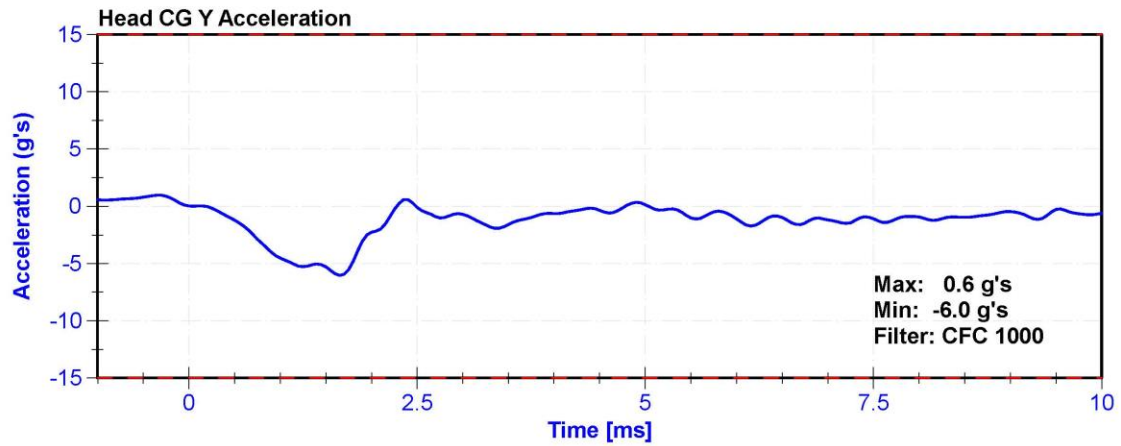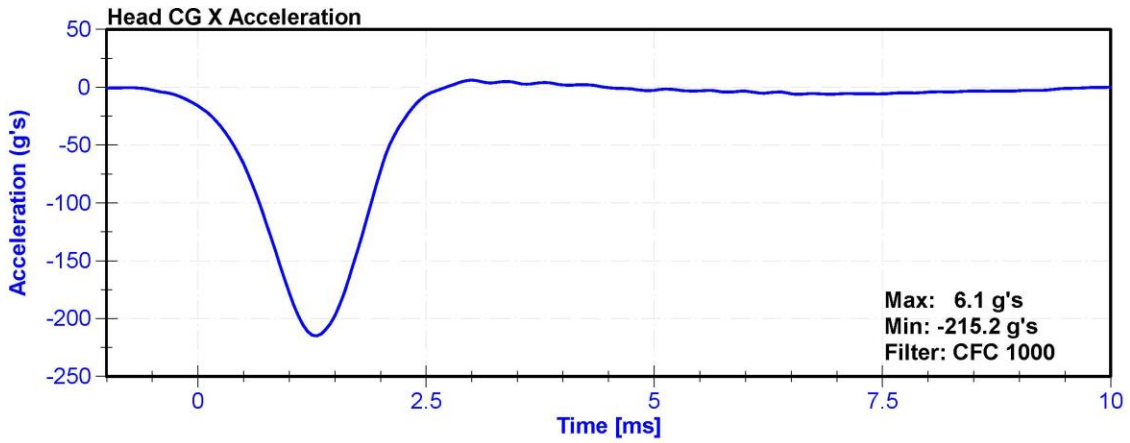



ATD Manufacturer	Humanetics	Test Technician	K. Dutton
ATD Serial Number	142	Laboratory Supervisor	K. Brogan




Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21.1	Pass
Humidity	10	70	%	40.8	Pass
Velocity	6.89	7.13	m/s	6.958	Pass
Pendulum Deceleration at 10ms	22.5	27.5	g's	25.99	Pass
Pendulum Deceleration at 20ms	17.6	22.6	g's	21.84	Pass
Pendulum Deceleration at 30ms	12.5	18.5	g's	15.87	Pass
Max. Pendulum Deceleration After 30ms	0	29	g's	26.3	Pass
Pendulum Deceleration Time to 5 g's	34	42	ms	41.4	Pass
Maximum D Plane Rotation	64	78	deg	74.4	Pass
Time to Maximum Rotation	57	64	ms	61.2	Pass
Rotation Decay to Zero	113	127	ms	118.5	Pass
Moment About Occipital Condyle	88.1	108.4	Nm	94.64	Pass
Time to Maximum Moment	47	58	ms	54.6	Pass
Moment Decay to Zero	97	107	ms	104.4	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	ENDEVCO 7231CT	AC-C16503	1/29/2019	1/29/2020
Pendulum Potentiometer	ETI SP22G	DS-LABPOT1	11/15/2018	11/15/2019
Condyle Potentiometer	ETI SP22G	DS-LABPOT2	11/15/2018	11/15/2019
Upper Neck Load Cell	FTSS IF-205	LC-161My	9/25/2019	9/24/2020

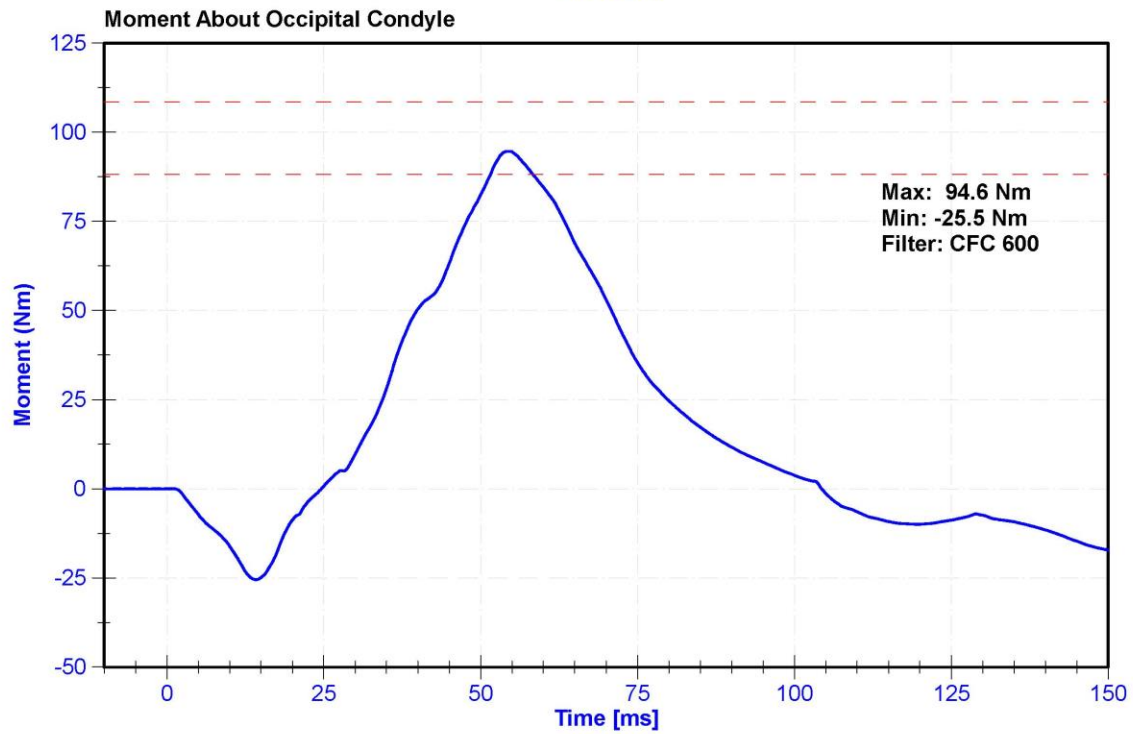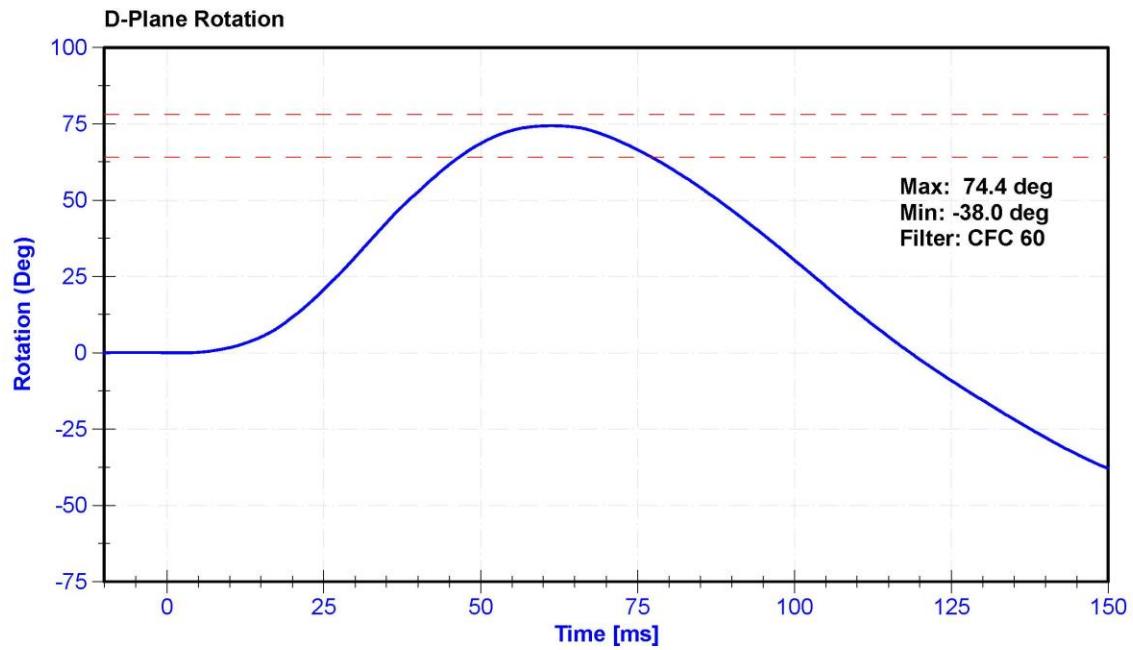

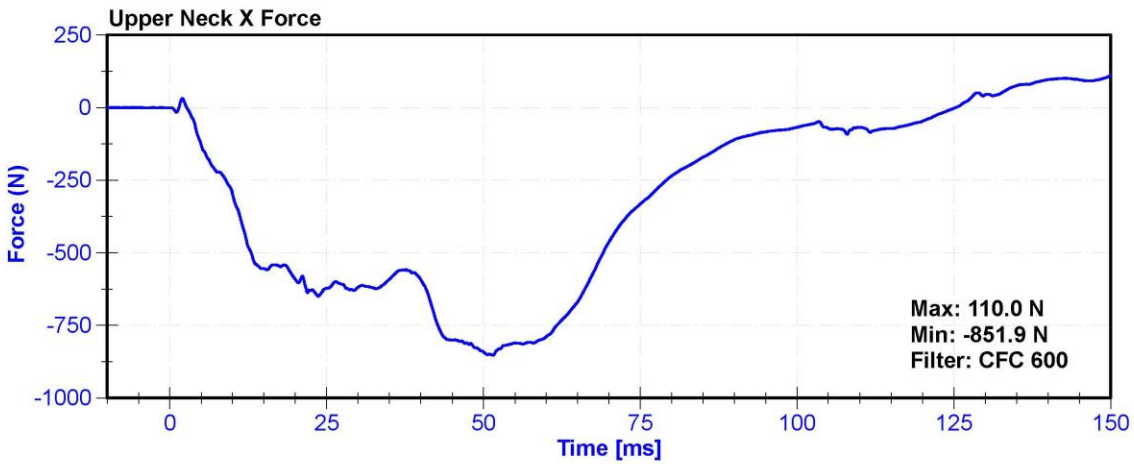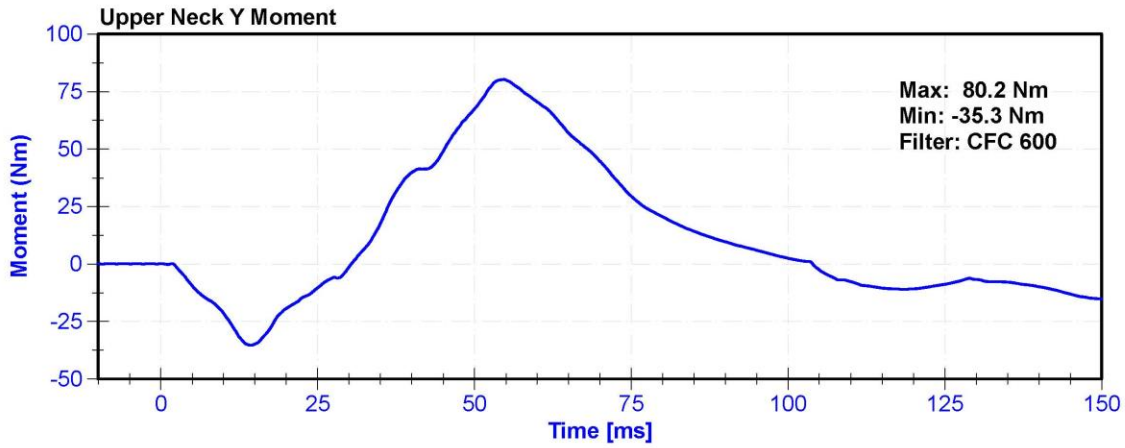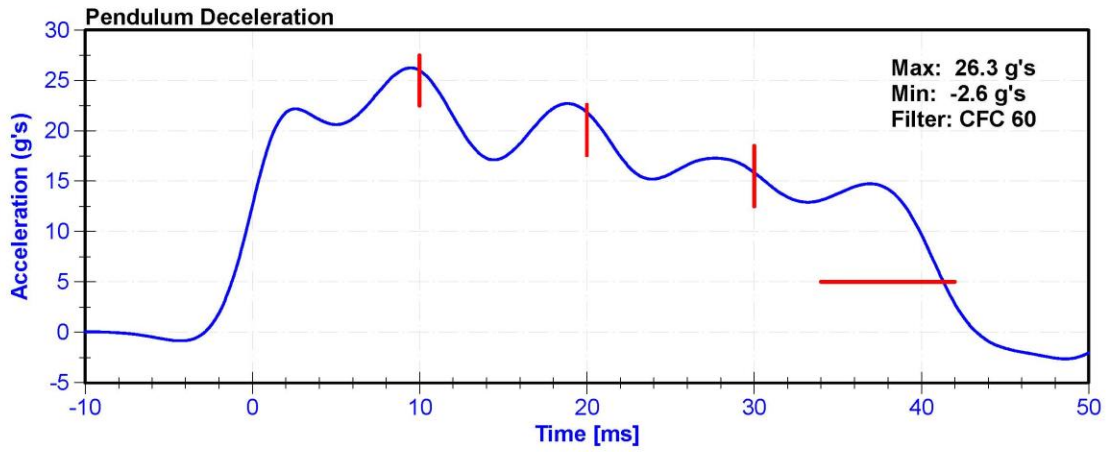



ATD Manufacturer	Humanetics	Test Technician	D.Reinhard
ATD Serial Number	142	Laboratory Supervisor	K. Brogan




Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21.8	Pass
Humidity	10	70	%	42.9	Pass
Velocity	5.94	6.19	m/s	5.964	Pass
Pendulum Deceleration at 10ms	17.2	21.2	g's	20.39	Pass
Pendulum Deceleration at 20ms	14	19	g's	16.6	Pass
Pendulum Deceleration at 30ms	11	16	g's	12.8	Pass
Max. Pendulum Deceleration After 30ms	0	22	g's	20.6	Pass
Pendulum Deceleration Time to 5 g's	38	46	ms	45.2	Pass
Maximum D Plane Rotation	81	106	deg	96.5	Pass
Time to Maximum Rotation	72	82	ms	78.2	Pass
Rotation Decay to Zero	147	174	ms	157.0	Pass
Minimum Moment About OC	-80	-52.9	Nm	-68.60	Pass
Time to Minimum Moment	65	79	ms	71.4	Pass
Moment Decay to Zero	120	148	ms	141.0	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	ENDEVCO 7231CT	AC-C16503 Striker	1/29/2019	1/29/2020
Pendulum Potentiometer	ETI SP22G	DS-LABPOT1	11/15/2018	11/15/2019
Condyle Potentiometer	ETI SP22G	DS-LABPOT2	11/15/2018	11/15/2019
Upper Neck Load Cell	FTSS IF-205	LC-161Fx	9/25/2019	9/24/2020

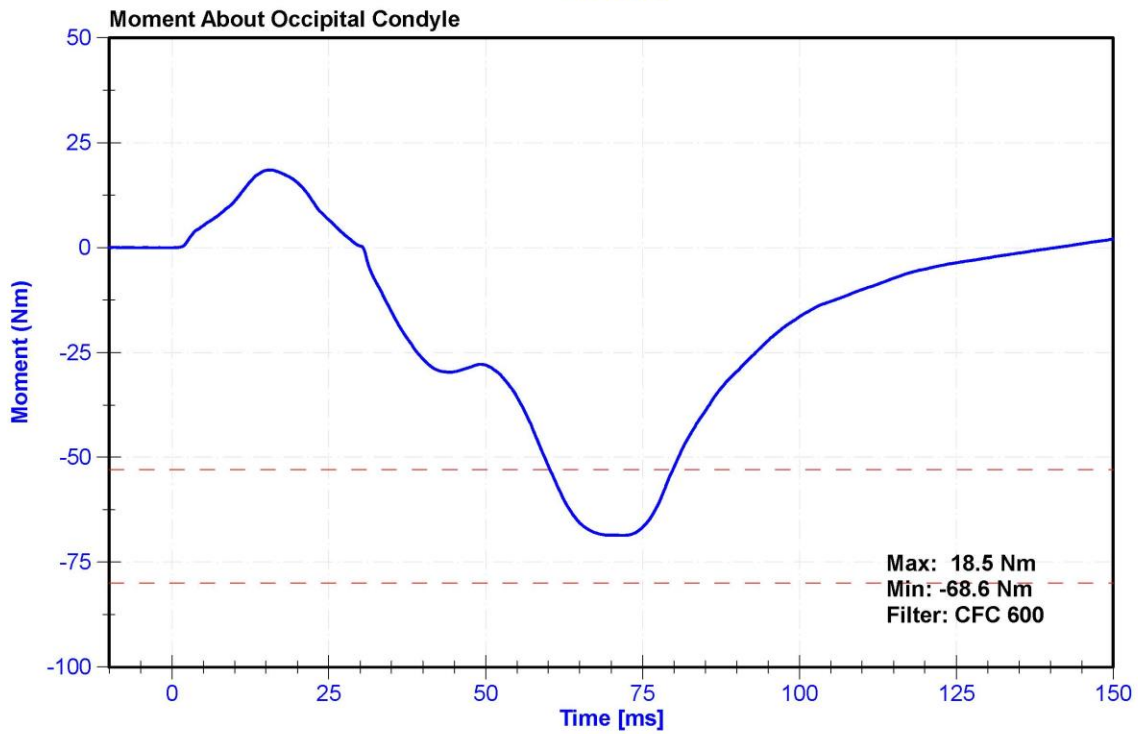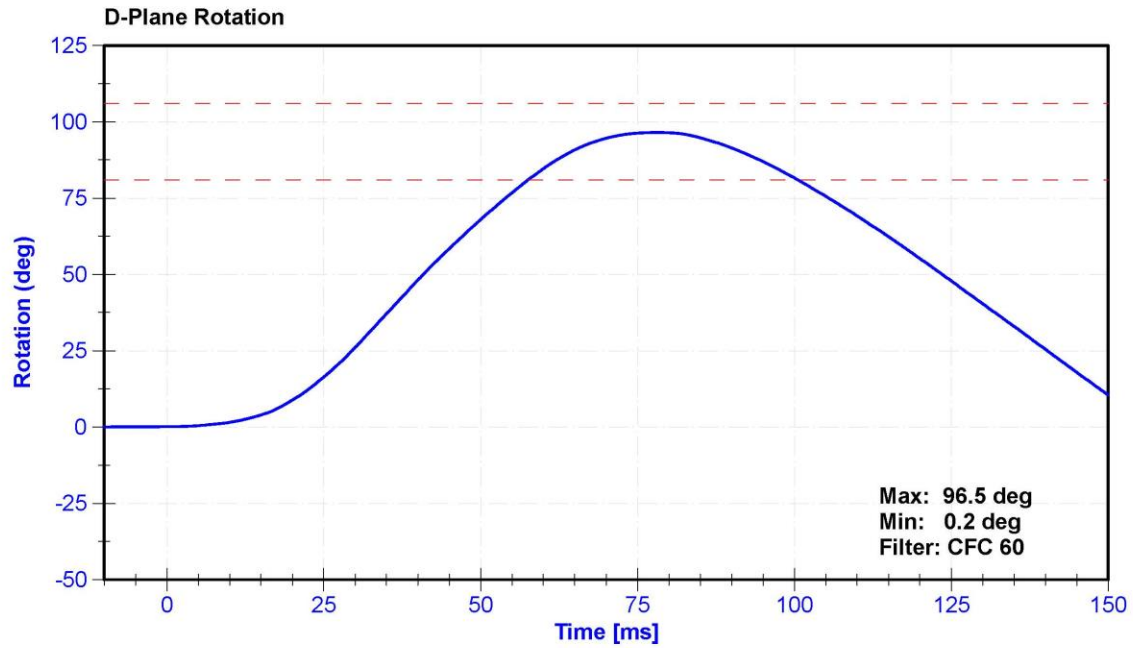

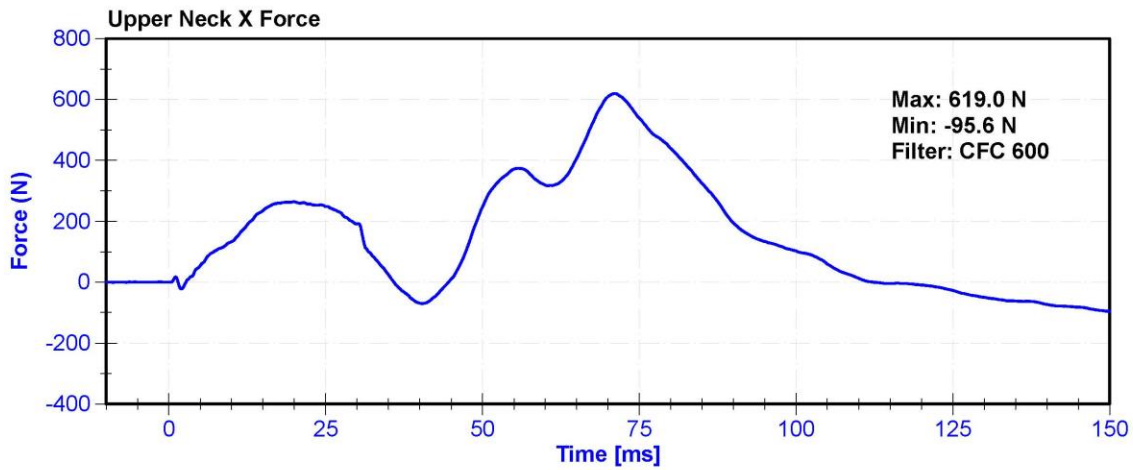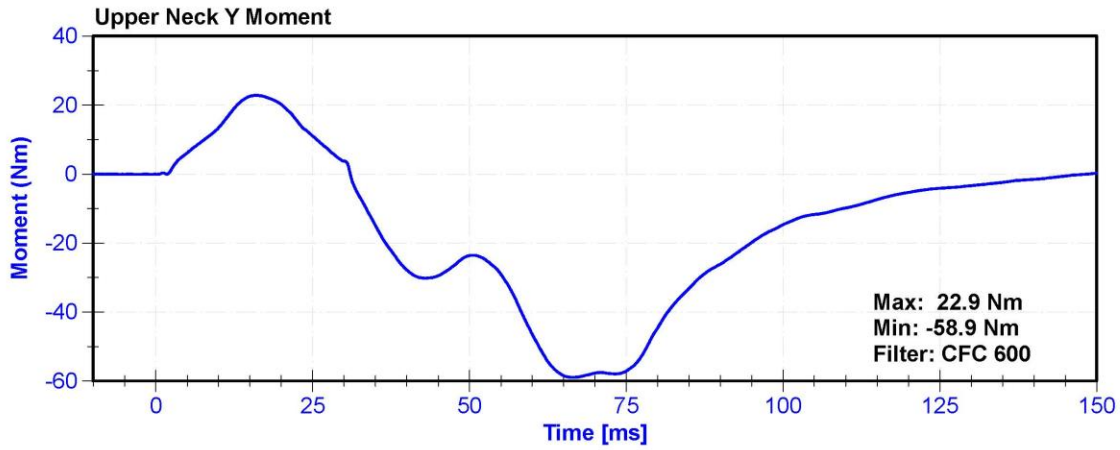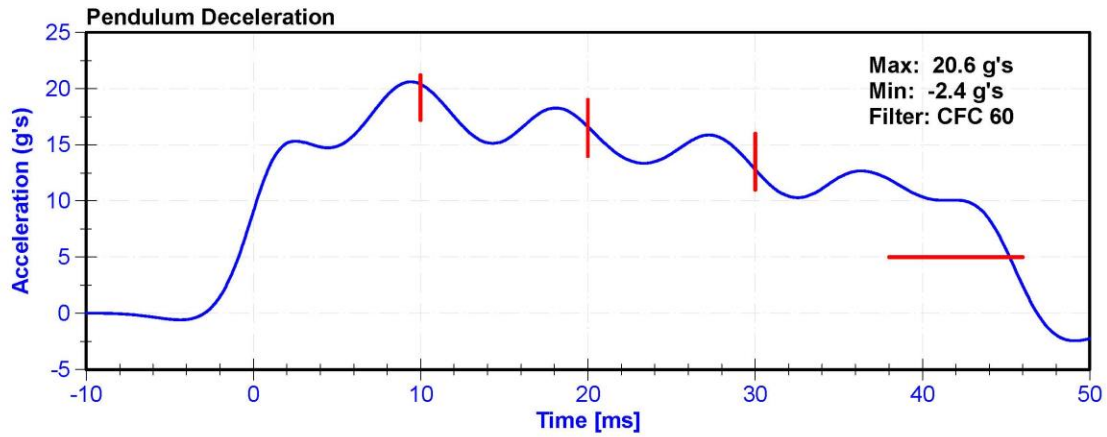


ATD Manufacturer	Humanetics	Test Technician	D.Reinhard
ATD Serial Number	142	Laboratory Supervisor	K.Brogan



Results



Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	20.8	Pass
Humidity	10	70	%	36.1	Pass
Velocity	6.59	6.83	m/s	6.773	Pass
Chest Displacement	-72.6	-63.5	mm	-68.82	Pass
Resistive Force	5160	5894	N	5801.7	Pass
Hysteresis	65	85	%	67.7	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	MSI 64C-2000	A260487	8/22/2019	2/20/2020
Chest Potentiometer	JDK 6209-2038	DS-142	9/12/2019	9/11/2020

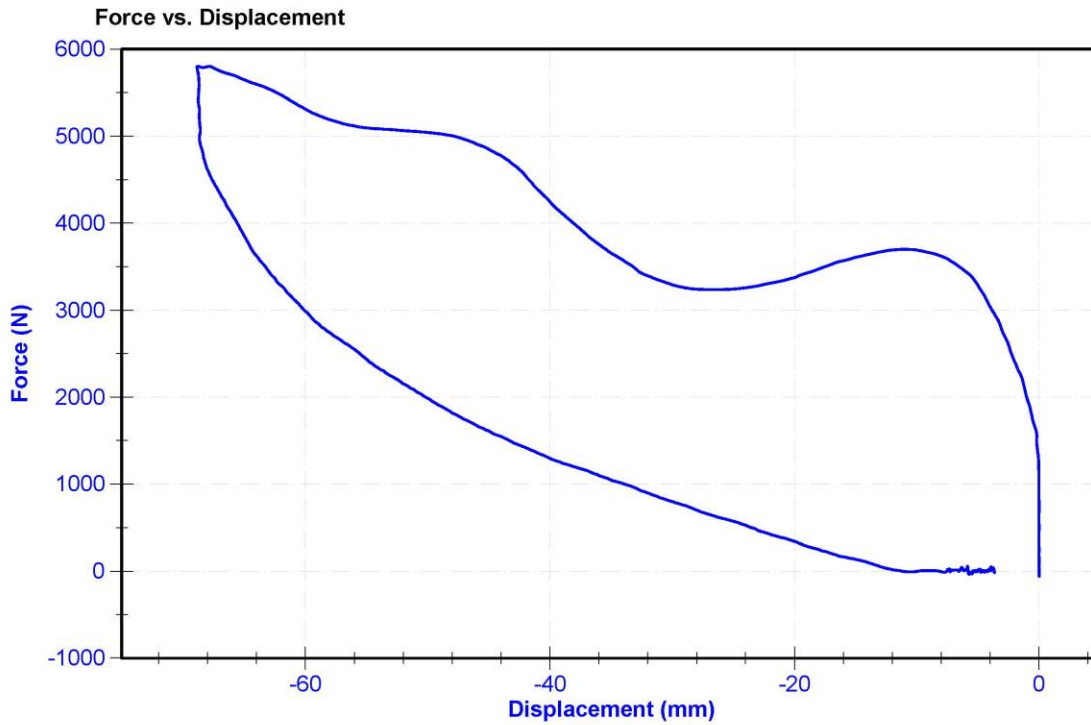

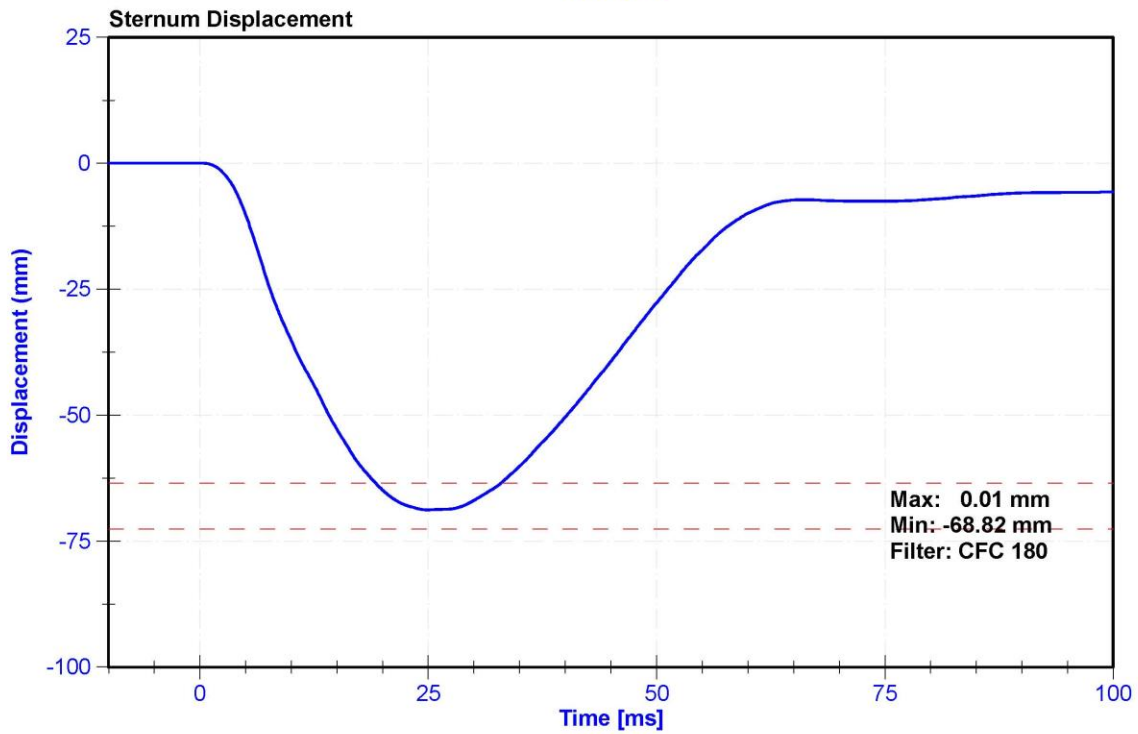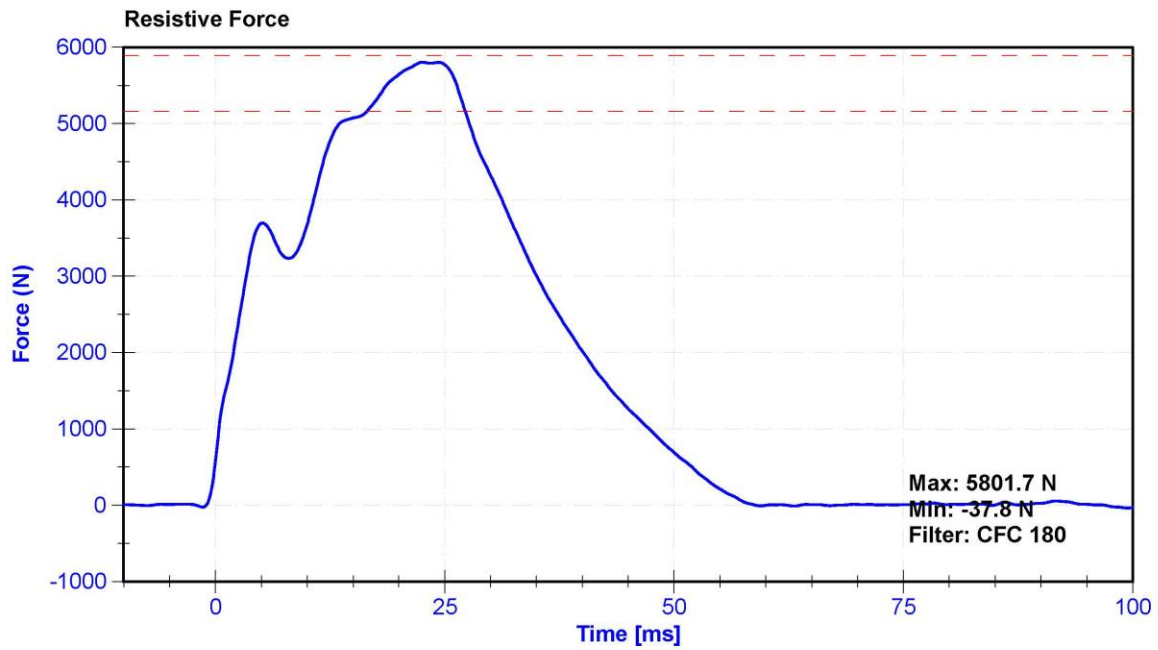

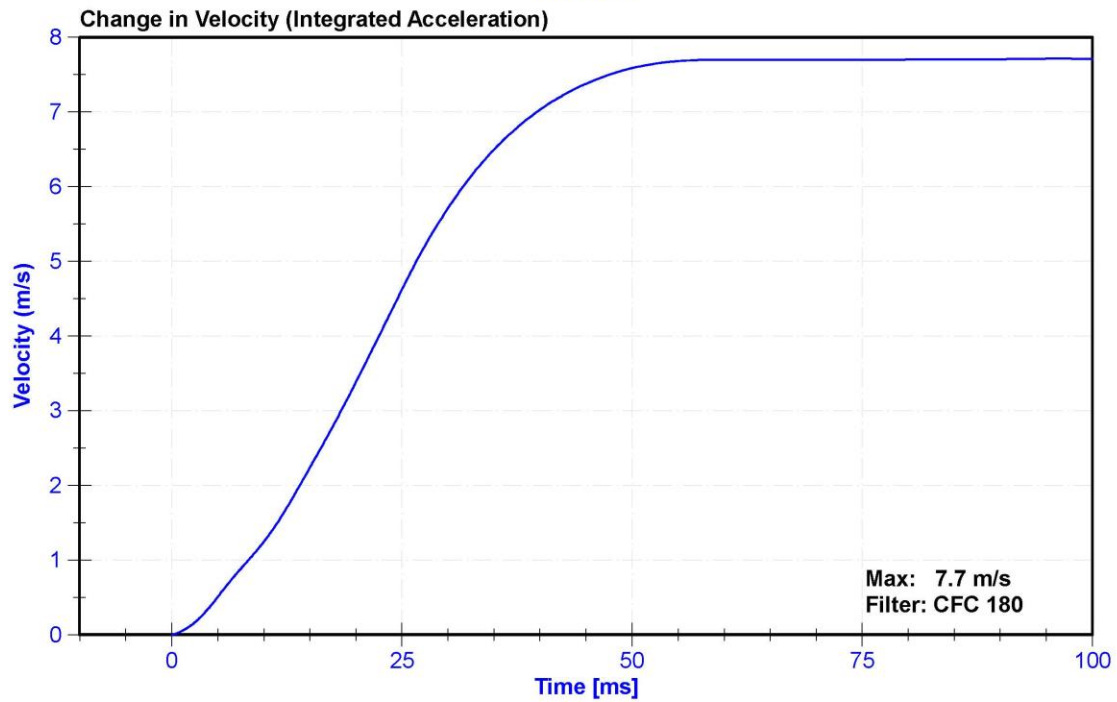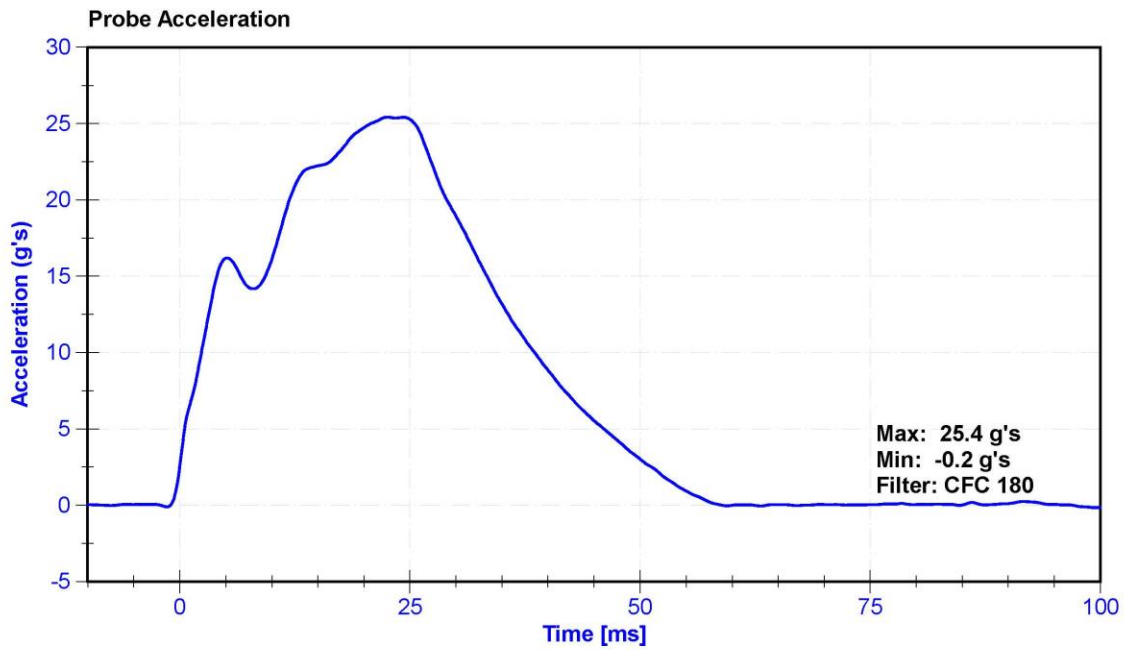


ATD Manufacturer	Humanetics	Test Technician	K. Dutton
ATD Serial Number	142	Laboratory Supervisor	K. Brogan

Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	18.9	25.6	°C	21.8	Pass
Humidity	10	70	%	53.0	Pass
Average Velocity	5	10	deg/s	7.3	Pass
Angle at 203Nm	40	50	deg	44.4	Pass
Moment at 30 degrees	0	94.9	Nm	81.1	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Potentiometer	ETI SP22	DS-0008	2019-09-18	2020-09-17
Load Cell	Key Trans 2301-02	LC-115 My	2019-09-12	2020-09-11

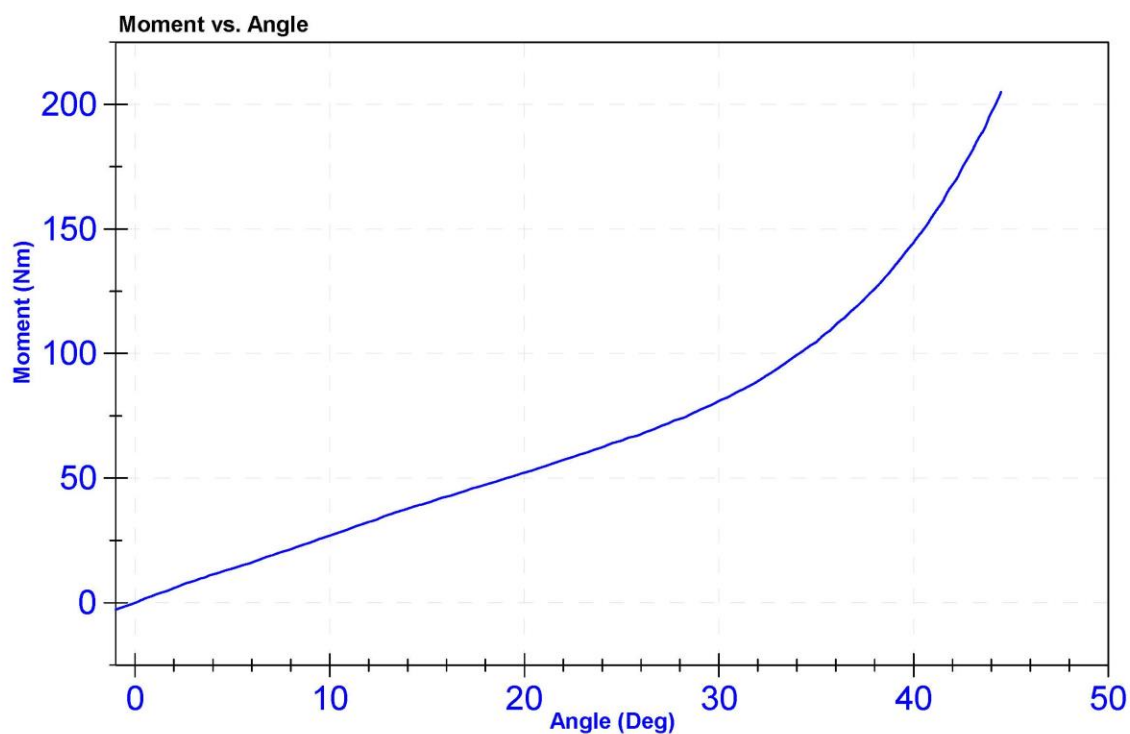


ATD Manufacturer	Humanetics	Test Technician	K. Dutton
ATD Serial Number	142	Laboratory Supervisor	K. Brogan

Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	18.9	25.6	°C	20.9	Pass
Humidity	10	70	%	56.0	Pass
Average Velocity	5	10	deg/s	7.4	Pass
Angle at 203Nm	40	50	deg	46.3	Pass
Moment at 30 degrees	0	94.9	Nm	84.7	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Potentiometer	ETI SP22	DS-0008	2019-09-18	2020-09-17
Load Cell	Key Trans 2301-02	LC-115 My	2019-09-12	2020-09-11

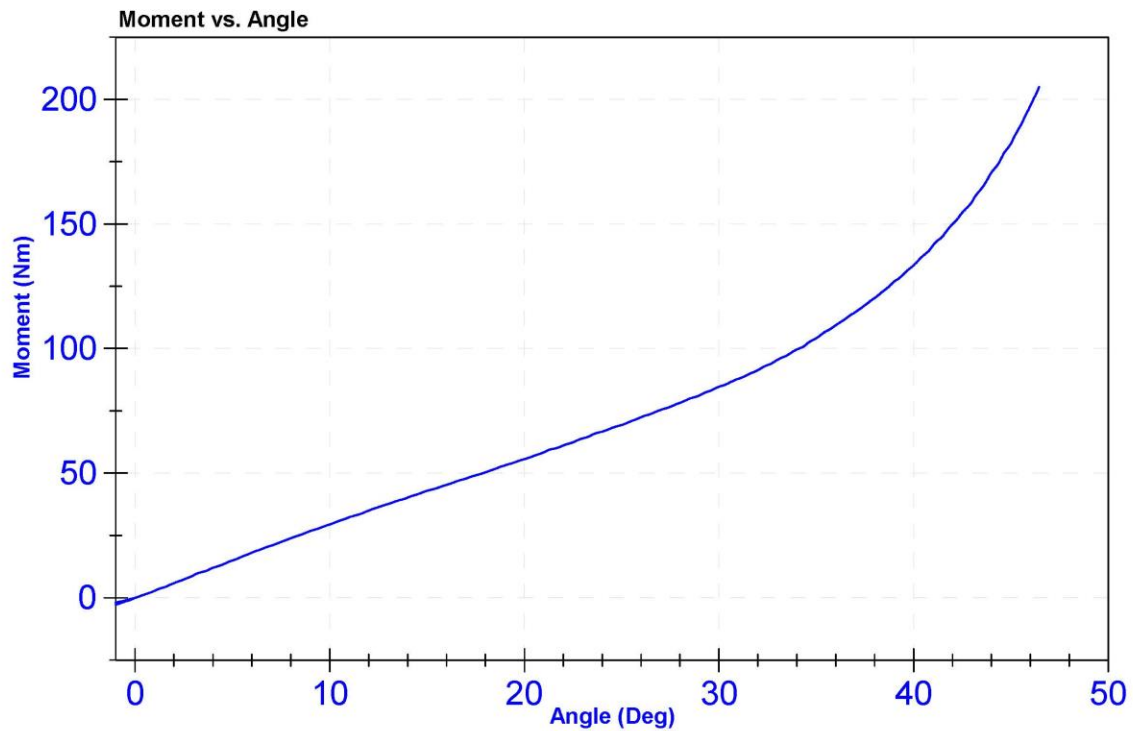


ATD Manufacturer	Humanetics	Test Technician	E. Helenbrook
ATD Serial Number	142	Laboratory Supervisor	K. Brogan



Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	18.9	25.6	°C	21.5	Pass
Humidity	10	70	%	40	Pass
Velocity	2.07	2.13	m/s	2.114	Pass
Maximum Resistive Force	4720	5780	N	5323.0	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	Measurement Specialties	A260568	7/29/2019	1/29/2019

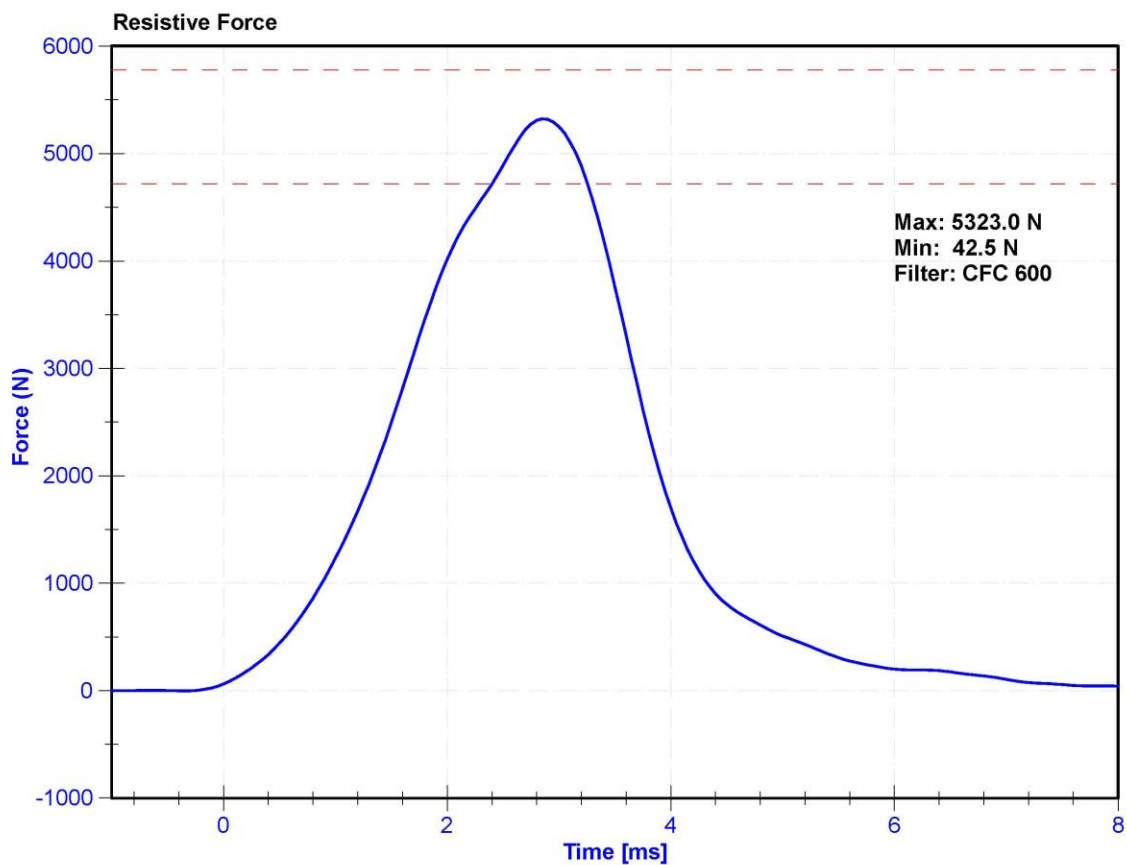

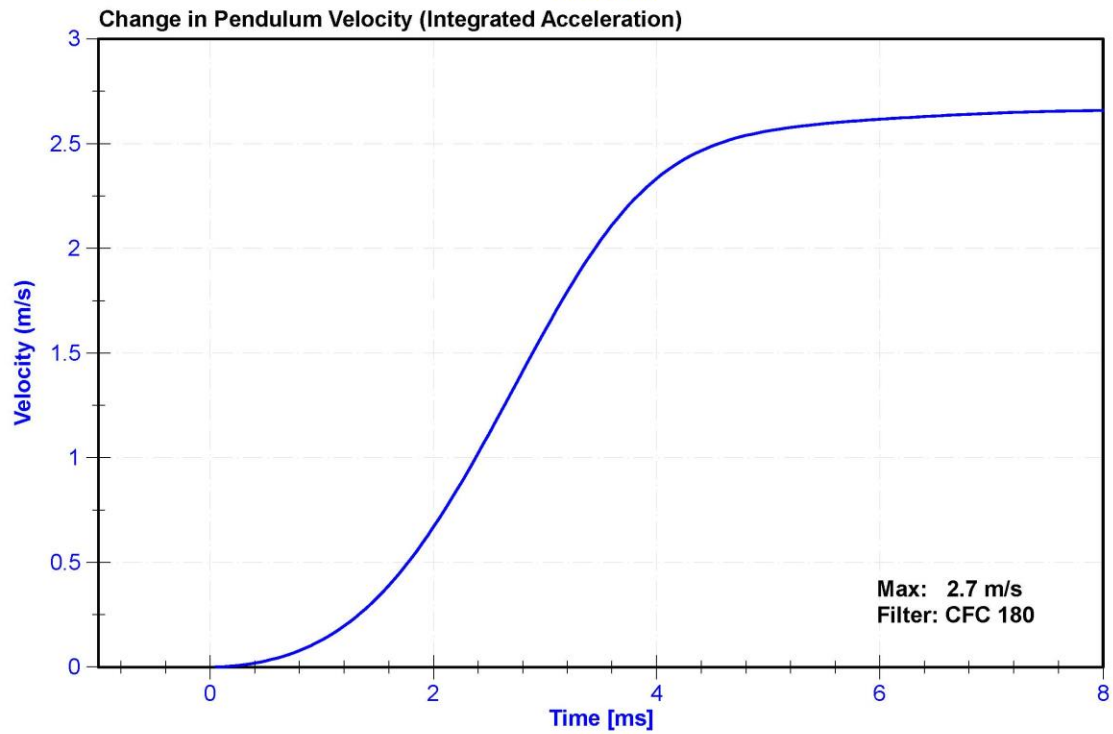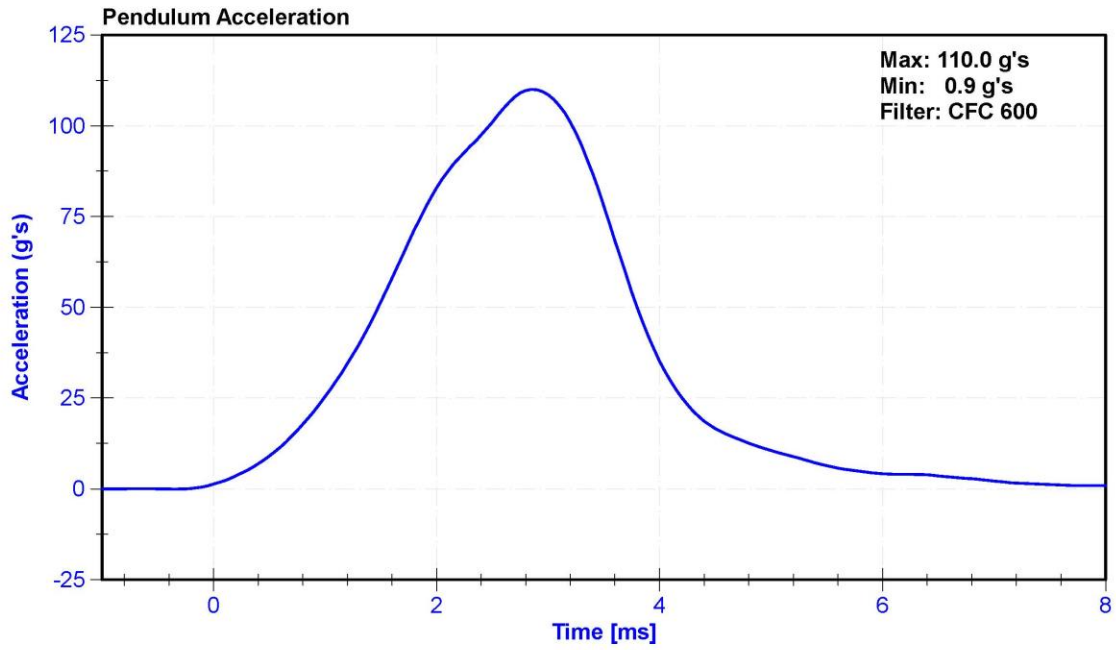


ATD Manufacturer	Humanetics	Test Technician	E. Helenbrook
ATD Serial Number	142	Laboratory Supervisor	K. Brogan



Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	18.9	25.6	°C	21.5	Pass
Humidity	10	70	%	40	Pass
Velocity	2.07	2.13	m/s	2.115	Pass
Maximum Resistive Force	4720	5780	N	5441.7	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	Measurement Specialties	A260568	7/29/2019	1/29/2020

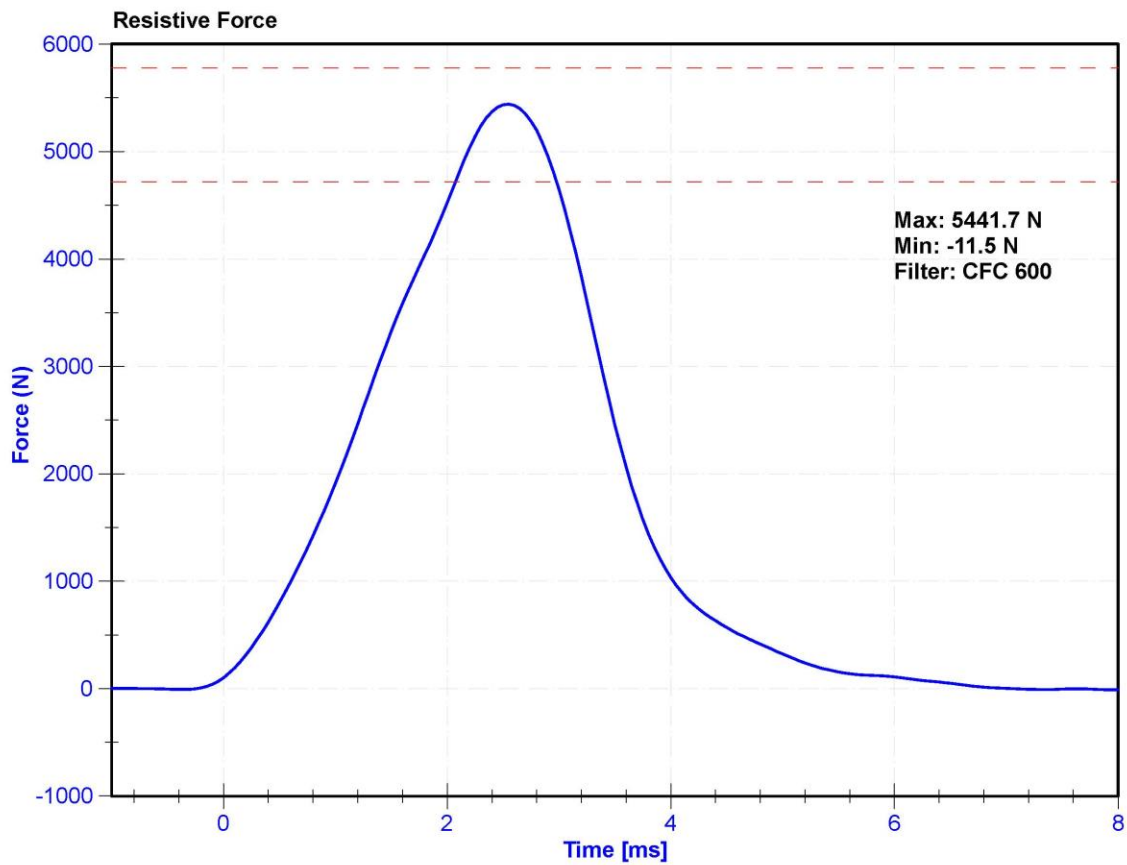

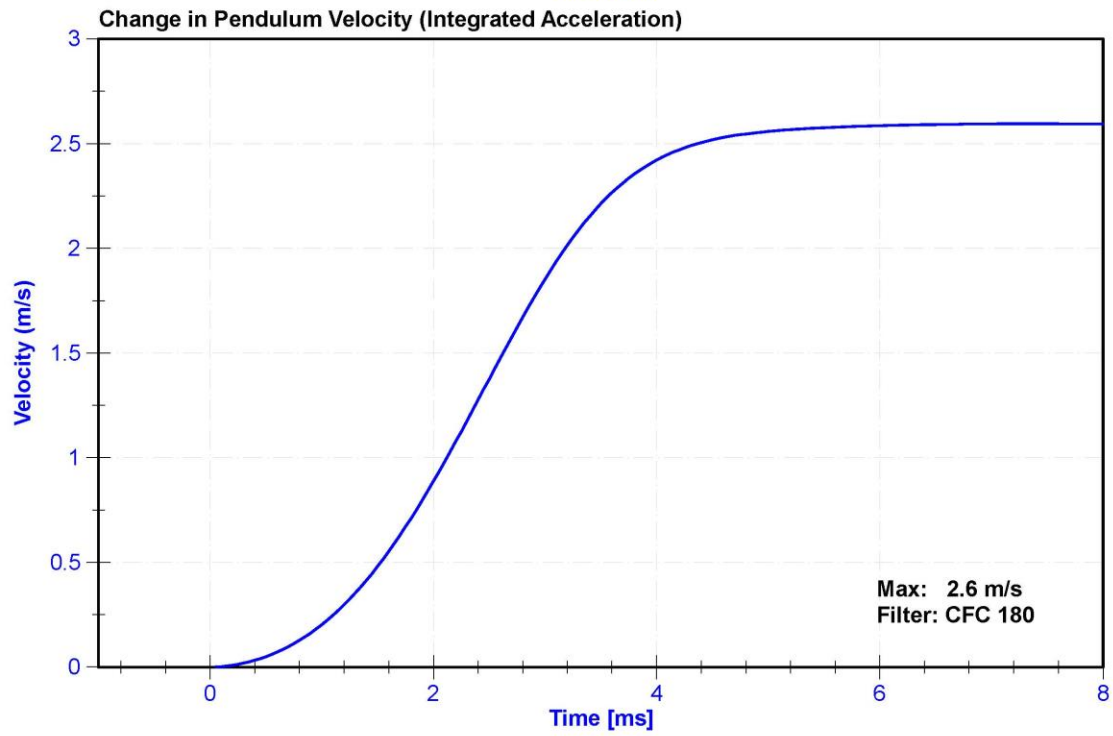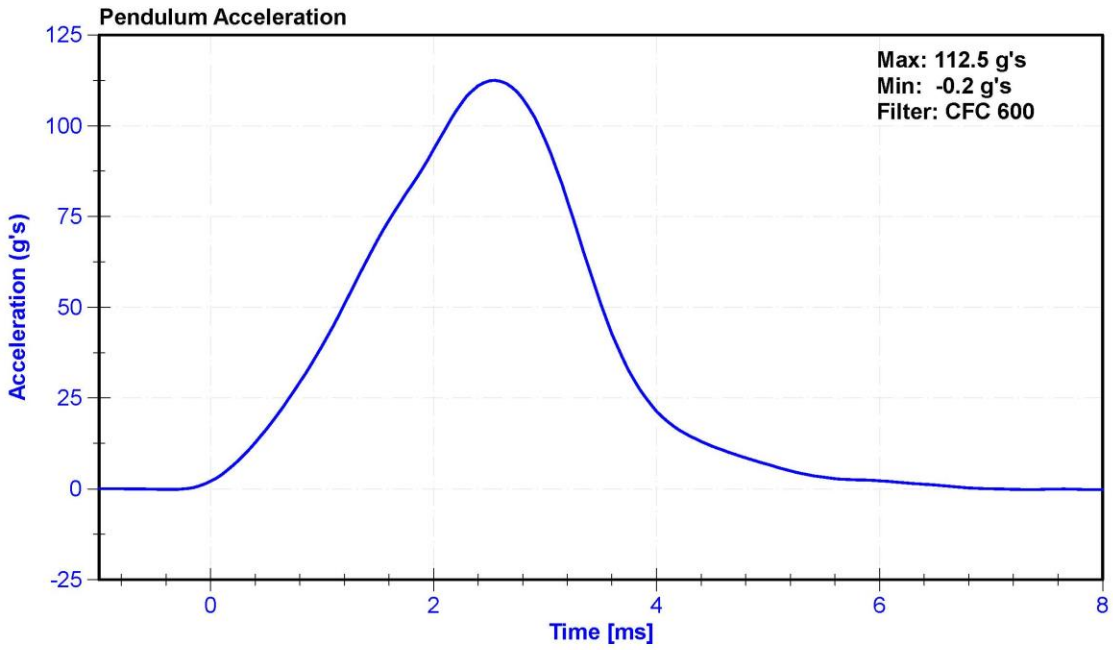

CALIBRATION TEST RESULTS

PRE-TEST

HYBRID III 5TH PERCENTILE - PASSENGER ATD

SERIAL NO: 140




External Measurements - Hybrid 3 - 50th Male

Technician: K. Dutton

Date: 10/15/2019

Dummy Serial Number: 142

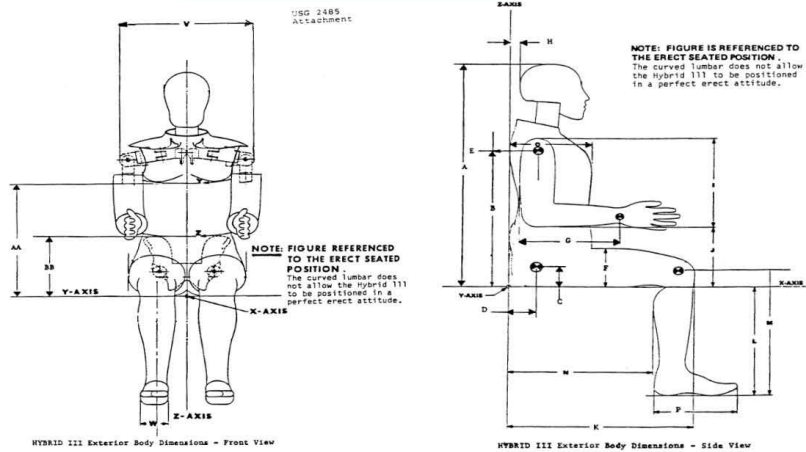

Symbol	Description	Specification (in)		Result (in)	Pass/Fail
A	Sitting Height	34.6	35.0	34.8	Pass
B	Shoulder Pivot Height	19.9	20.5	20.2	Pass
C	H-Point Height	3.3	3.5	3.4	Pass
D	H-Point from Backline	5.3	5.5	5.4	Pass
E	Shoulder Pivot from Backline	3.3	3.7	3.5	Pass
F	Thigh Clearance	5.5	6.1	5.6	Pass
G	Back of Elbow to Wrist Pivot	11.4	12.0	11.7	Pass
H	Head Back to Backline	1.6	1.8	1.7	Pass
I	Shoulder to Elbow Length	13.0	13.6	13.5	Pass
J	Elbow Rest Height	7.5	8.3	8.2	Pass
K	Buttock to Knee Length	22.8	23.8	23.4	Pass
L	Popliteal Height	16.9	17.9	17.4	Pass
M	Knee Pivot Height	19.1	19.7	19.4	Pass
N	Buttock Popliteal Length	17.8	18.8	18.5	Pass
O	Chest Depth without Jacket	8.4	9.0	8.6	Pass
P	Foot Length (right)	9.9	10.5	10.3	Pass
V	Shoulder Breadth	16.3	17.2	16.8	Pass
W	Foot Breadth	3.6	4.2	3.9	Pass
Y	Chest Circumference with Jacket	38.2	39.4	38.9	Pass
Z	Waist Circumference	32.9	34.1	33.7	Pass
AA	Reference Location (Chest Circumference)	16.9	17.1	17.0	Pass
BB	Reference Location (Waist Circumference)	8.9	9.1	9.0	Pass


ATD Manufacturer	Humanetics	Test Technician	E. Helenbrook
ATD Serial Number	142	Laboratory Supervisor	K. Brogan




Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	18.9	25.6	°C	21	Pass
Humidity	10	70	%	40	Pass
Resultant Acceleration	225	275	g's	243.0	Pass
Oscillation	0	10	%	5.4	Pass
Lateral Acceleration	-15	15	g's	-6.0	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
X Accelerometer	Endevco	P51681	8/13/2019	2/13/2020
Y Accelerometer	Endevco	P64151	8/13/2019	2/13/2020
Z Accelerometer	Endevco	P52114	8/13/2019	2/13/2020

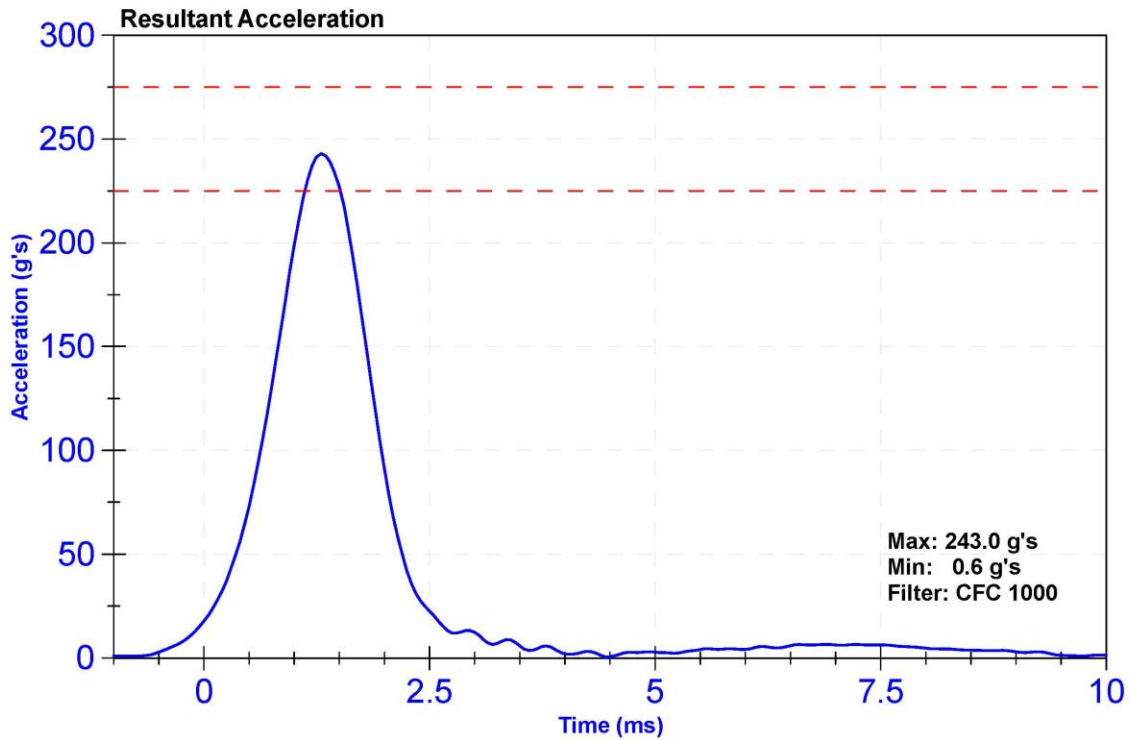

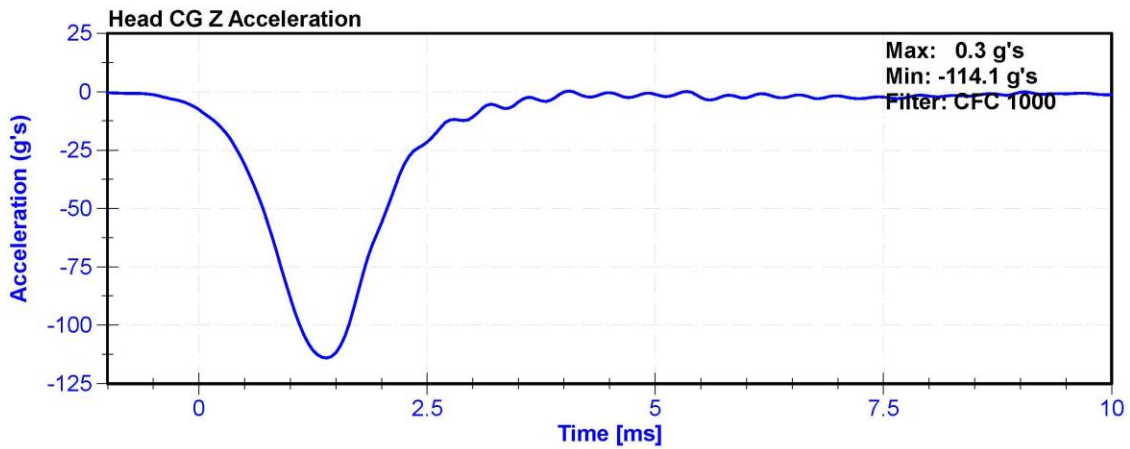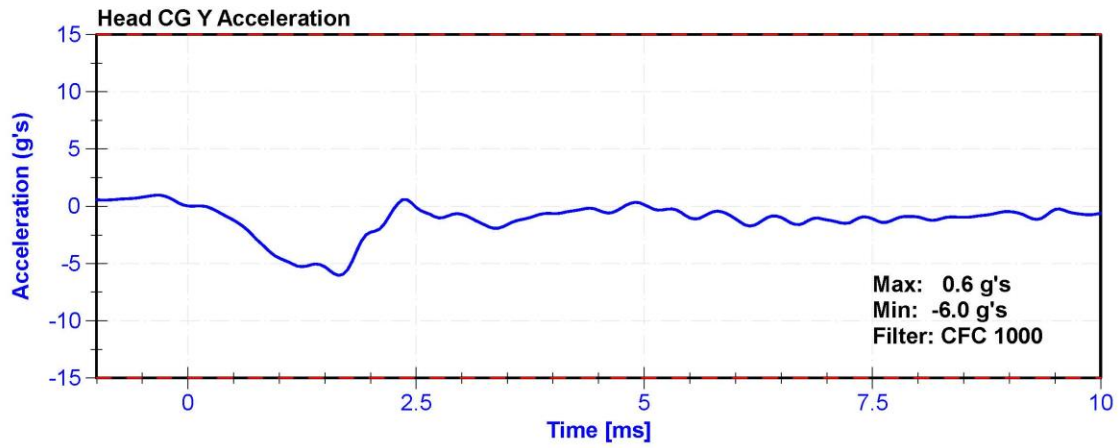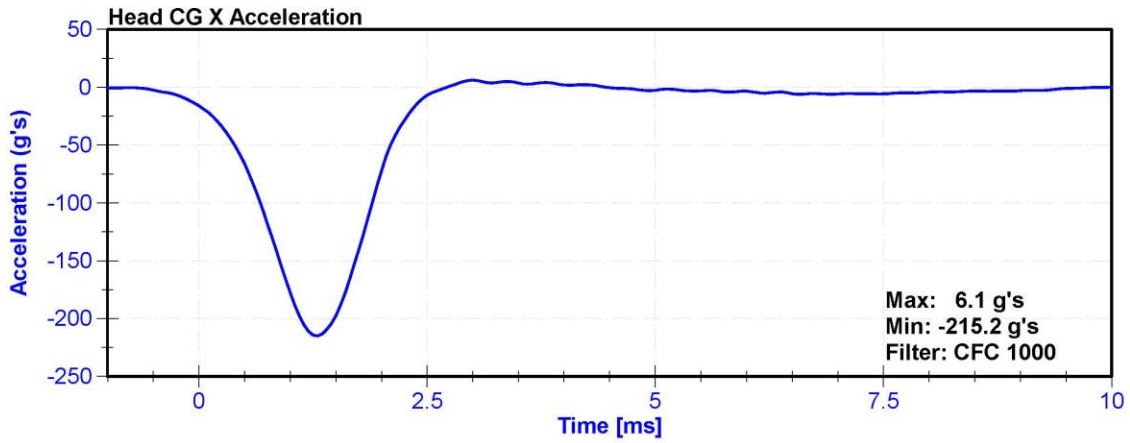



ATD Manufacturer	Humanetics	Test Technician	K. Dutton
ATD Serial Number	142	Laboratory Supervisor	K. Brogan




Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21.1	Pass
Humidity	10	70	%	40.8	Pass
Velocity	6.89	7.13	m/s	6.958	Pass
Pendulum Deceleration at 10ms	22.5	27.5	g's	25.99	Pass
Pendulum Deceleration at 20ms	17.6	22.6	g's	21.84	Pass
Pendulum Deceleration at 30ms	12.5	18.5	g's	15.87	Pass
Max. Pendulum Deceleration After 30ms	0	29	g's	26.3	Pass
Pendulum Deceleration Time to 5 g's	34	42	ms	41.4	Pass
Maximum D Plane Rotation	64	78	deg	74.4	Pass
Time to Maximum Rotation	57	64	ms	61.2	Pass
Rotation Decay to Zero	113	127	ms	118.5	Pass
Moment About Occipital Condyle	88.1	108.4	Nm	94.64	Pass
Time to Maximum Moment	47	58	ms	54.6	Pass
Moment Decay to Zero	97	107	ms	104.4	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	ENDEVCO 7231CT	AC-C16503	1/29/2019	1/29/2020
Pendulum Potentiometer	ETI SP22G	DS-LABPOT1	11/15/2018	11/15/2019
Condyle Potentiometer	ETI SP22G	DS-LABPOT2	11/15/2018	11/15/2019
Upper Neck Load Cell	FTSS IF-205	LC-161My	9/25/2019	9/24/2020

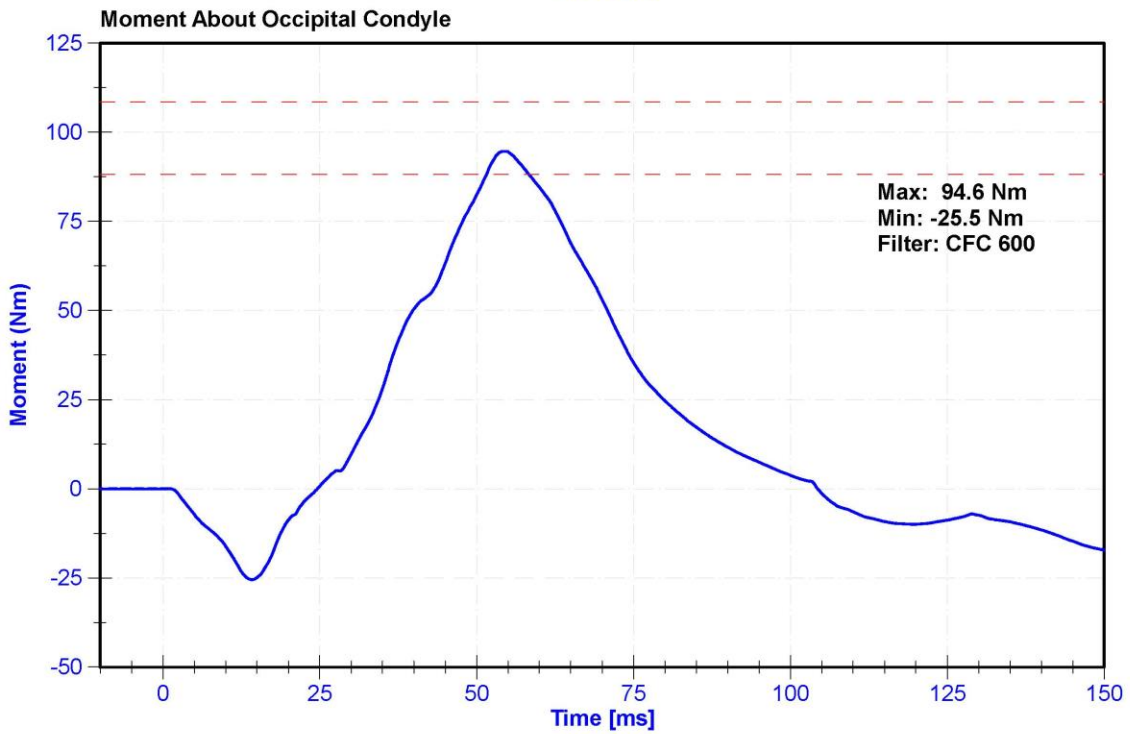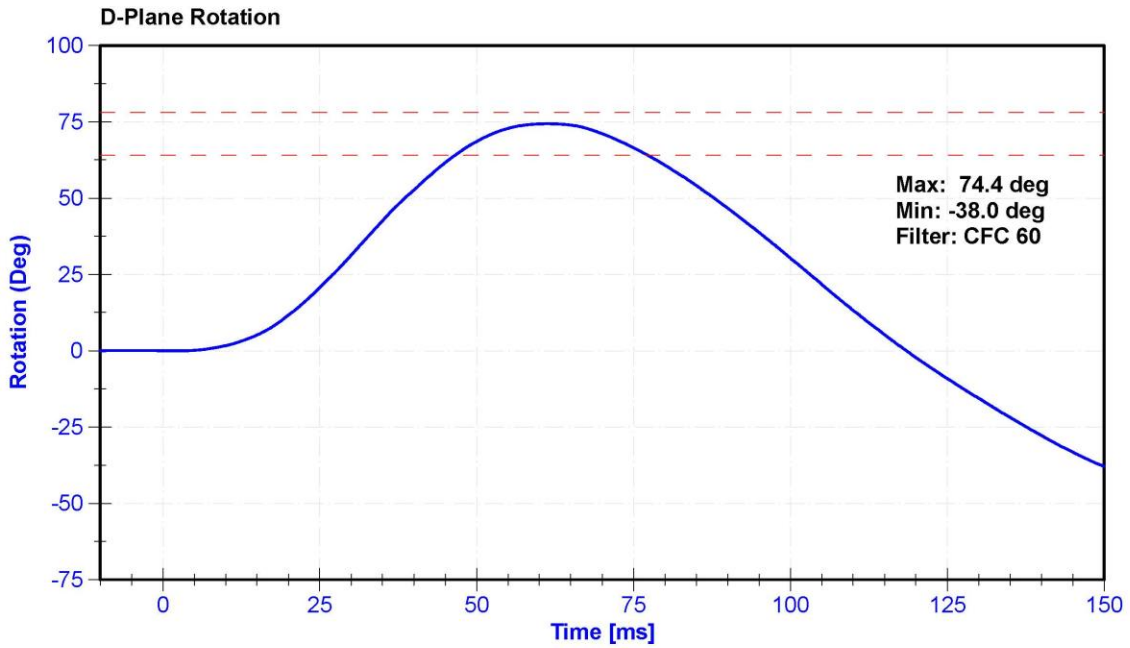

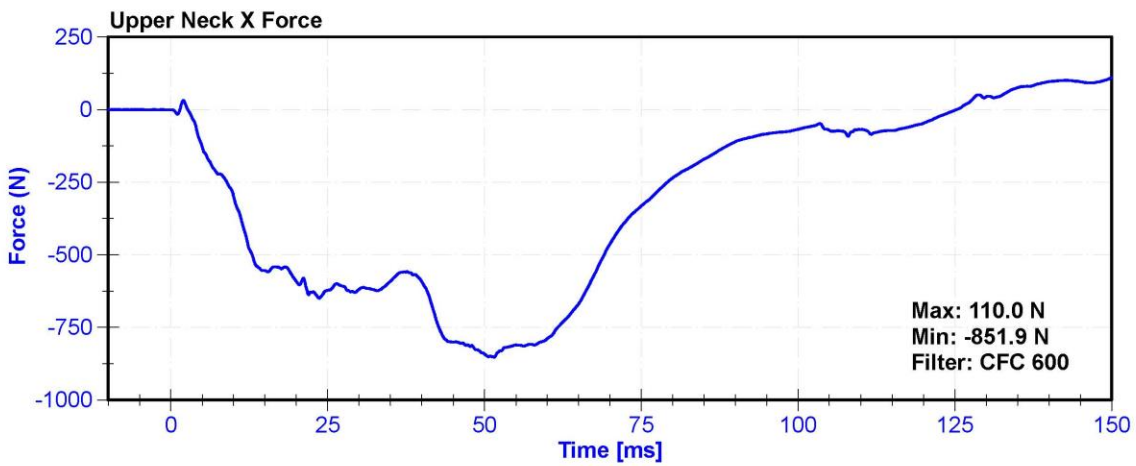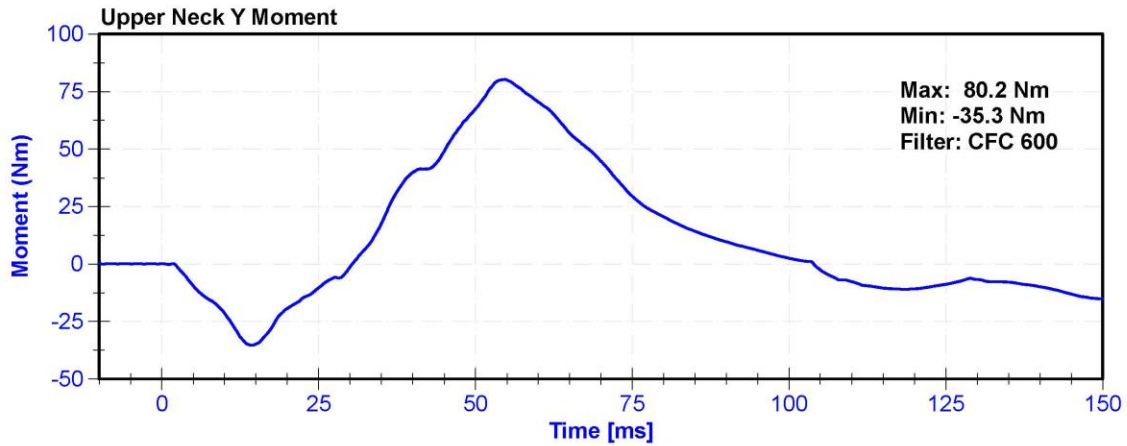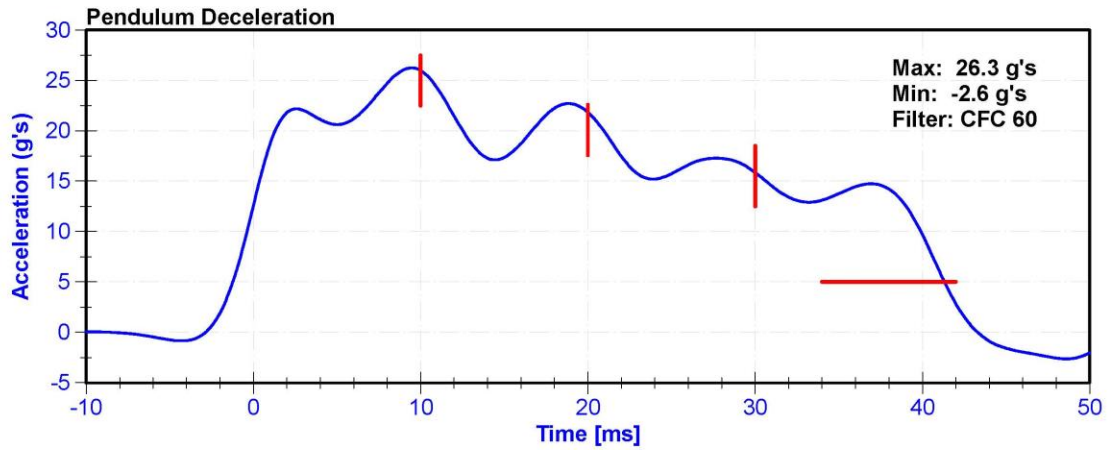



ATD Manufacturer	Humanetics	Test Technician	D.Reinhard
ATD Serial Number	142	Laboratory Supervisor	K. Brogan




Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21.8	Pass
Humidity	10	70	%	42.9	Pass
Velocity	5.94	6.19	m/s	5.964	Pass
Pendulum Deceleration at 10ms	17.2	21.2	g's	20.39	Pass
Pendulum Deceleration at 20ms	14	19	g's	16.6	Pass
Pendulum Deceleration at 30ms	11	16	g's	12.8	Pass
Max. Pendulum Deceleration After 30ms	0	22	g's	20.6	Pass
Pendulum Deceleration Time to 5 g's	38	46	ms	45.2	Pass
Maximum D Plane Rotation	81	106	deg	96.5	Pass
Time to Maximum Rotation	72	82	ms	78.2	Pass
Rotation Decay to Zero	147	174	ms	157.0	Pass
Minimum Moment About OC	-80	-52.9	Nm	-68.60	Pass
Time to Minimum Moment	65	79	ms	71.4	Pass
Moment Decay to Zero	120	148	ms	141.0	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	ENDEVCO 7231CT	AC-C16503 Striker	1/29/2019	1/29/2020
Pendulum Potentiometer	ETI SP22G	DS-LABPOT1	11/15/2018	11/15/2019
Condyle Potentiometer	ETI SP22G	DS-LABPOT2	11/15/2018	11/15/2019
Upper Neck Load Cell	FTSS IF-205	LC-161Fx	9/25/2019	9/24/2020

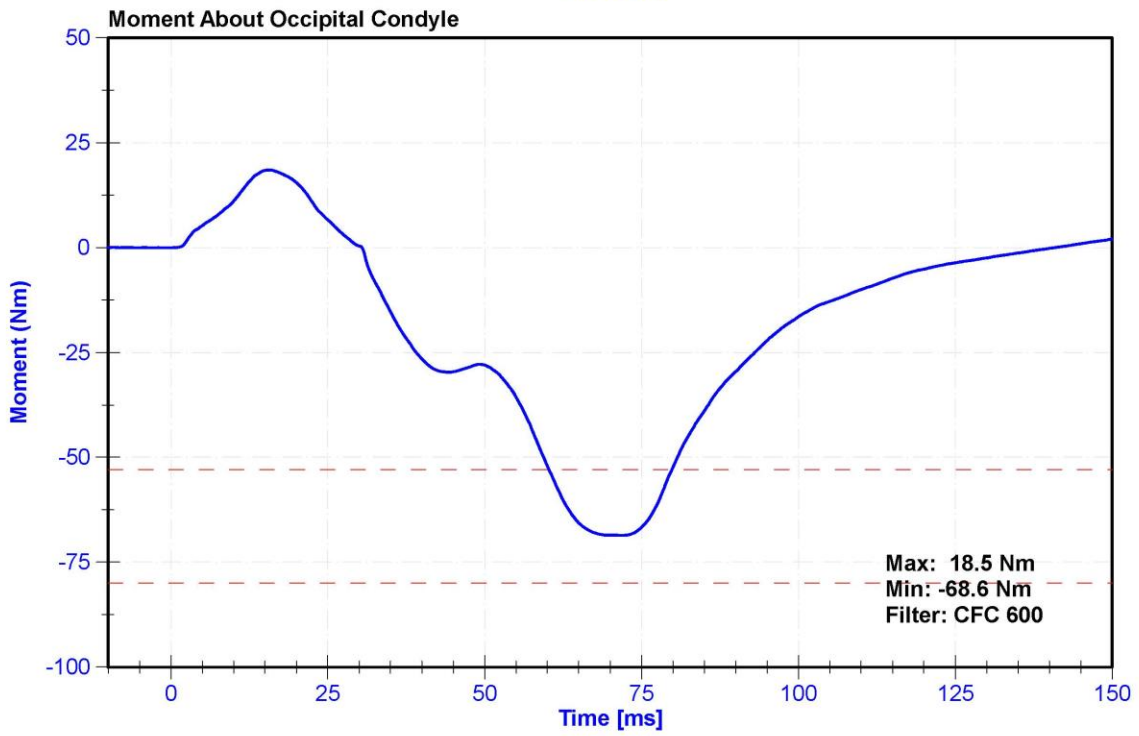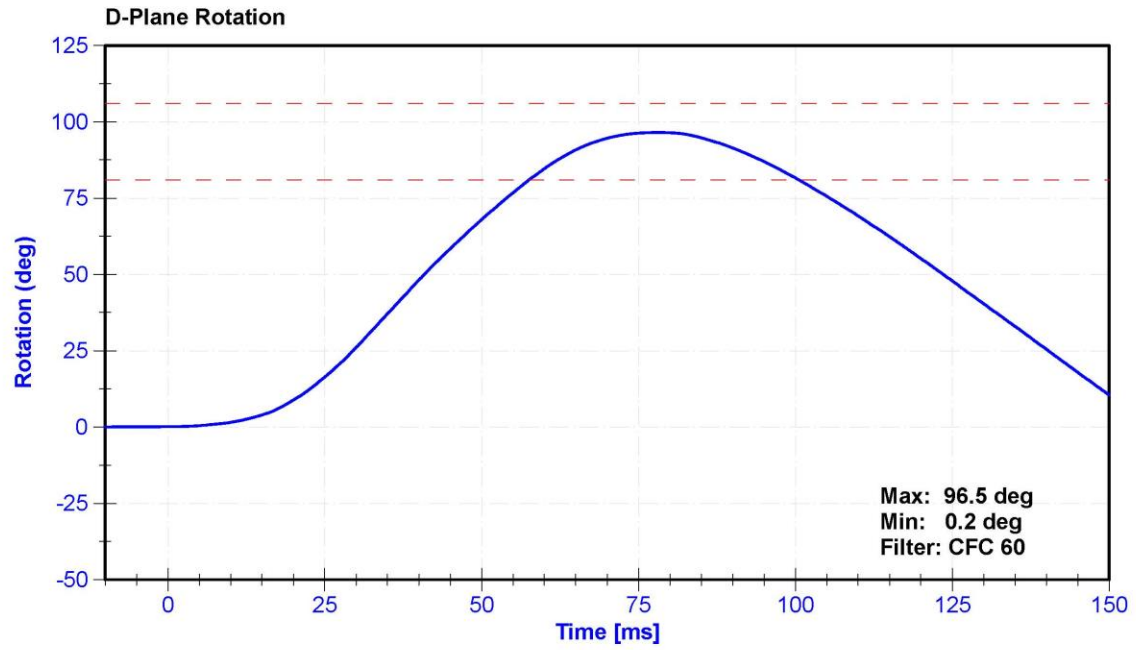

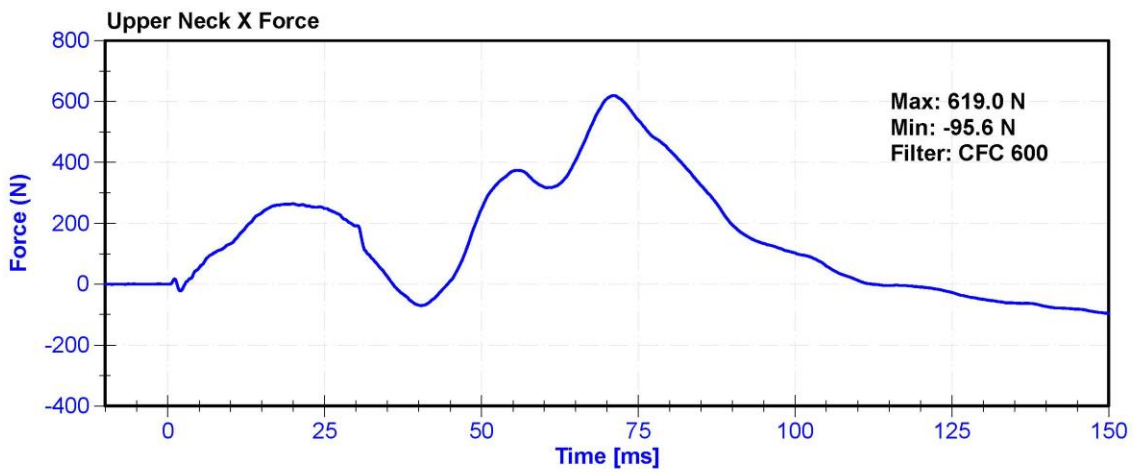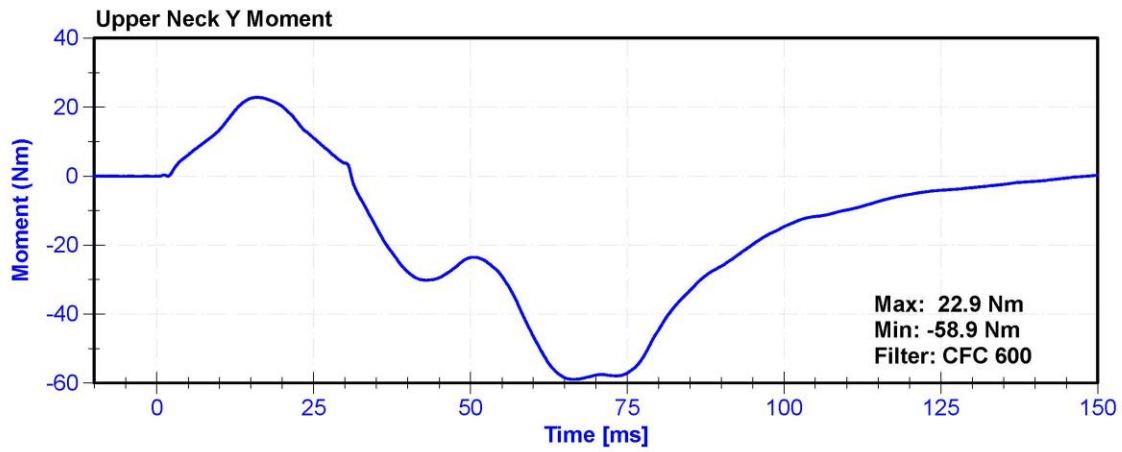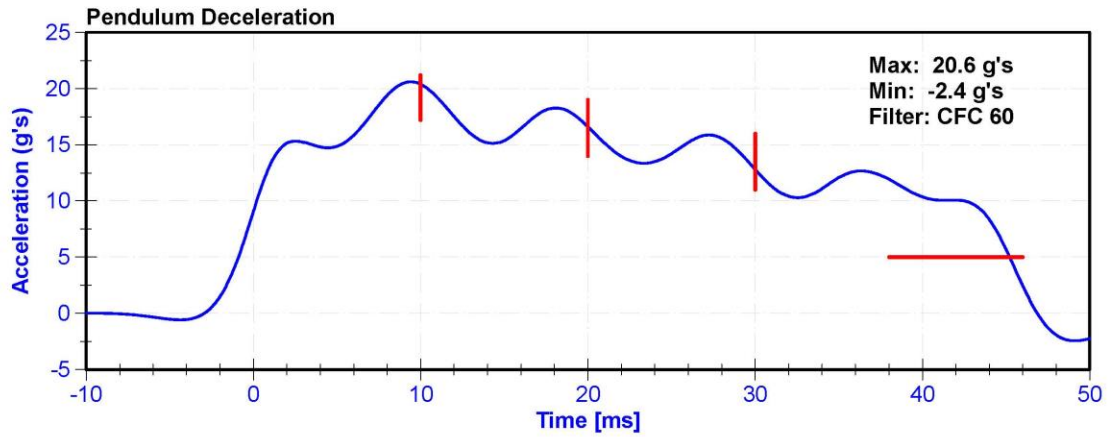


ATD Manufacturer	Humanetics	Test Technician	D.Reinhard
ATD Serial Number	142	Laboratory Supervisor	K.Brogan



Results



Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	20.8	Pass
Humidity	10	70	%	36.1	Pass
Velocity	6.59	6.83	m/s	6.773	Pass
Chest Displacement	-72.6	-63.5	mm	-68.82	Pass
Resistive Force	5160	5894	N	5801.7	Pass
Hysteresis	65	85	%	67.7	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	MSI 64C-2000	A260487	8/22/2019	2/20/2020
Chest Potentiometer	JDK 6209-2038	DS-142	9/12/2019	9/11/2020

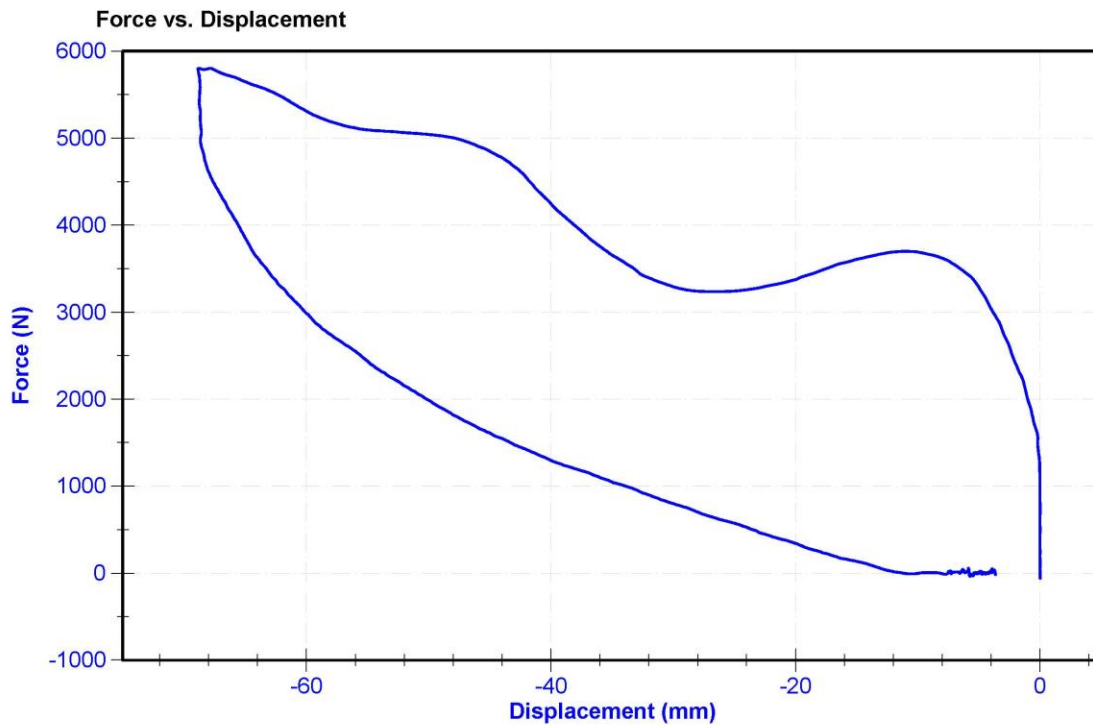

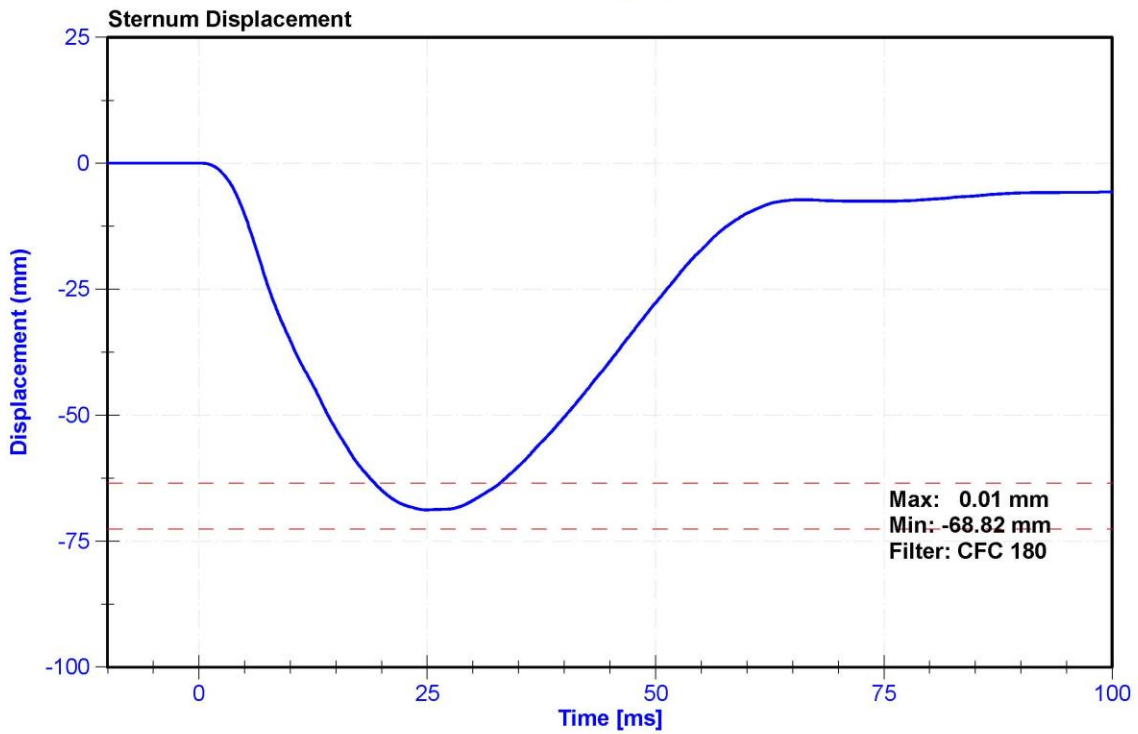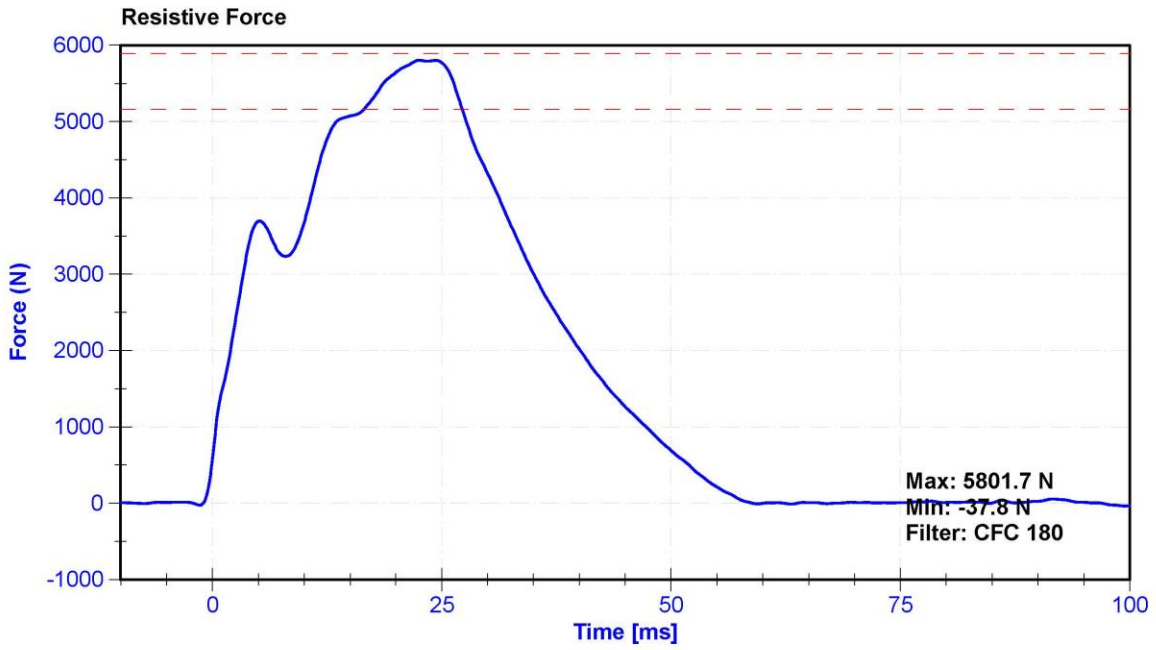

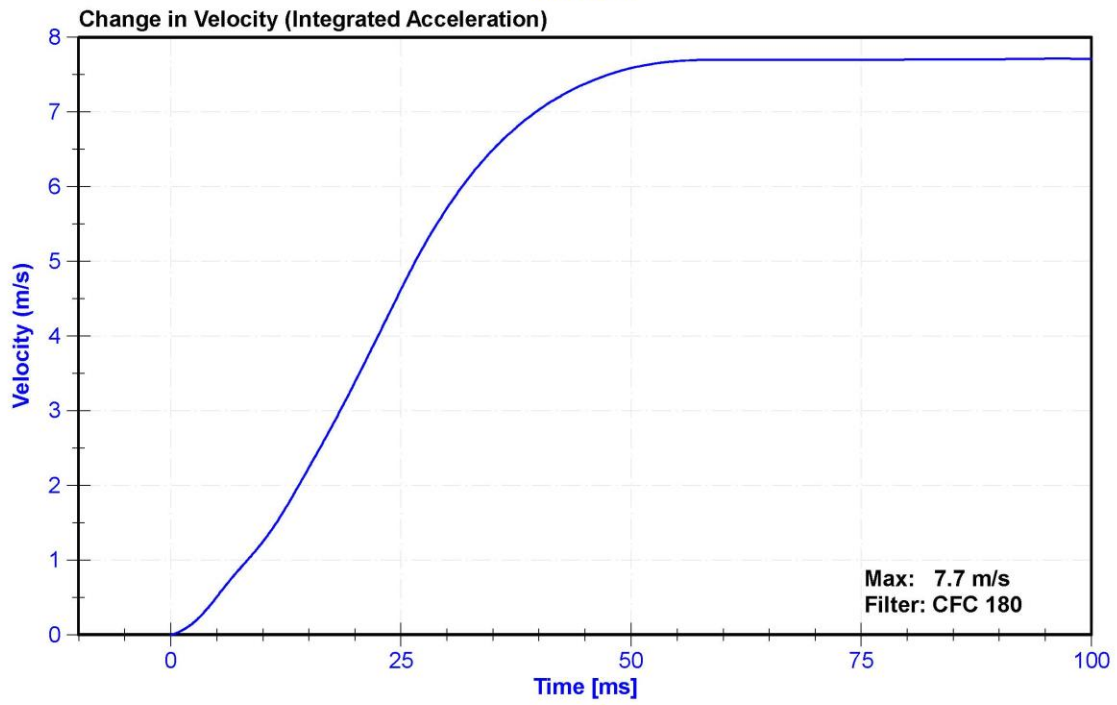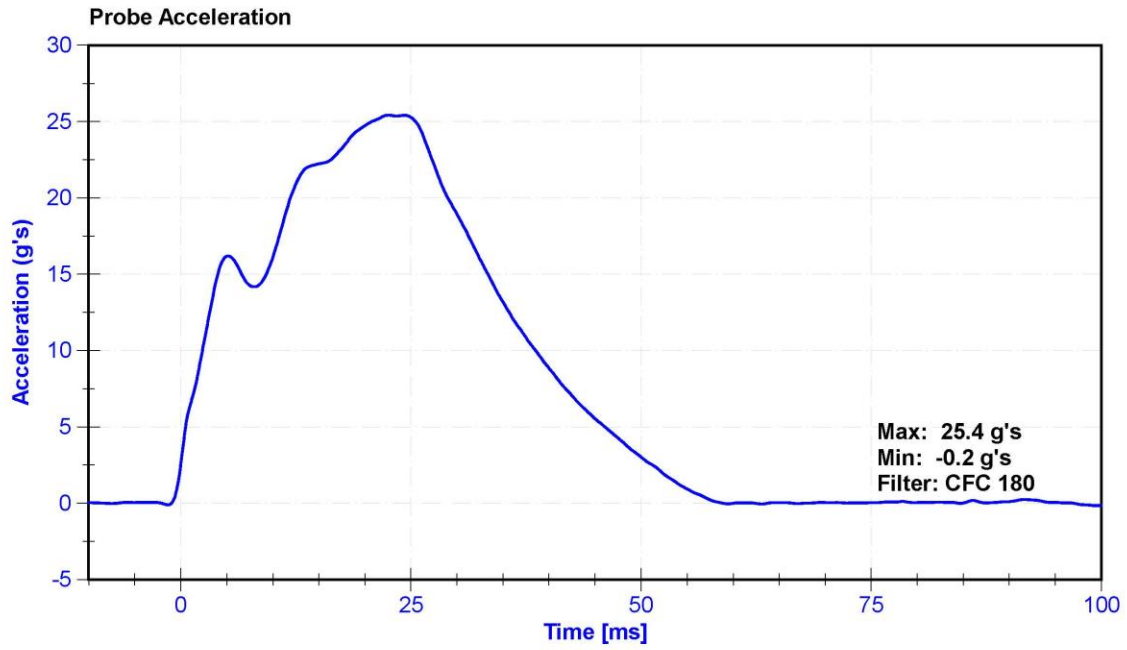


ATD Manufacturer	Humanetics	Test Technician	K. Dutton
ATD Serial Number	142	Laboratory Supervisor	K. Brogan

Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	18.9	25.6	°C	21.8	Pass
Humidity	10	70	%	53.0	Pass
Average Velocity	5	10	deg/s	7.3	Pass
Angle at 203Nm	40	50	deg	44.4	Pass
Moment at 30 degrees	0	94.9	Nm	81.1	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Potentiometer	ETI SP22	DS-0008	2019-09-18	2020-09-17
Load Cell	Key Trans 2301-02	LC-115 My	2019-09-12	2020-09-11

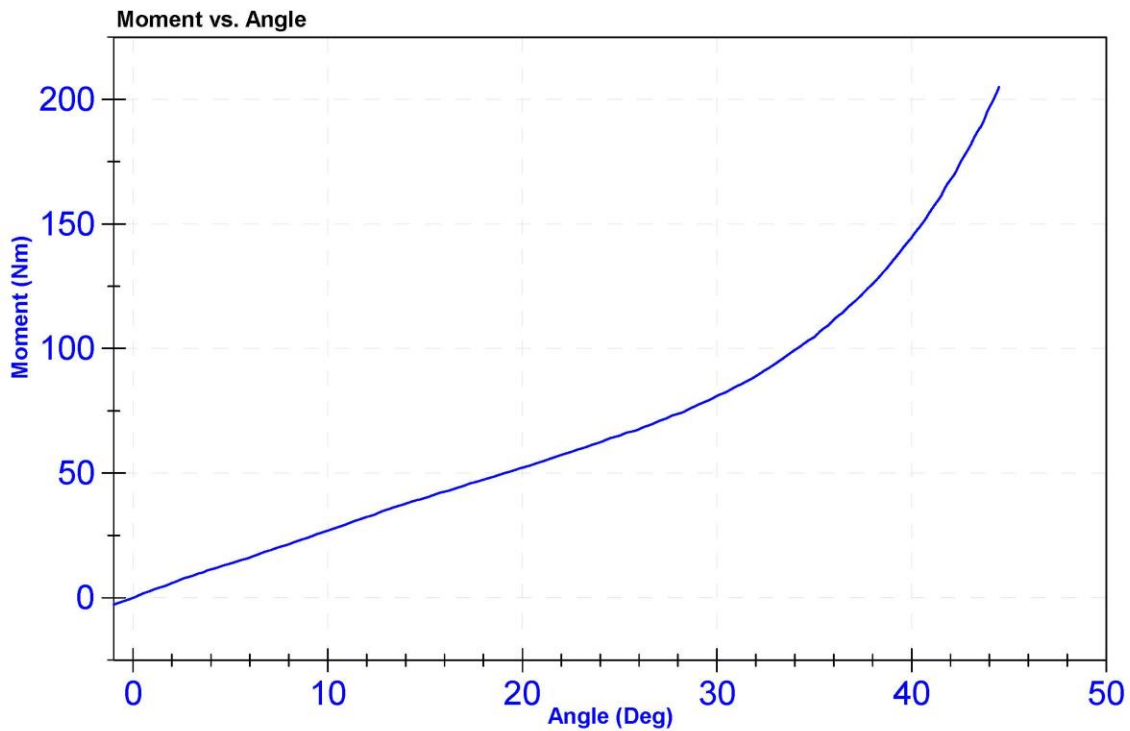


ATD Manufacturer	Humanetics	Test Technician	K. Dutton
ATD Serial Number	142	Laboratory Supervisor	K. Brogan

Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	18.9	25.6	°C	20.9	Pass
Humidity	10	70	%	56.0	Pass
Average Velocity	5	10	deg/s	7.4	Pass
Angle at 203Nm	40	50	deg	46.3	Pass
Moment at 30 degrees	0	94.9	Nm	84.7	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Potentiometer	ETI SP22	DS-0008	2019-09-18	2020-09-17
Load Cell	Key Trans 2301-02	LC-115 My	2019-09-12	2020-09-11

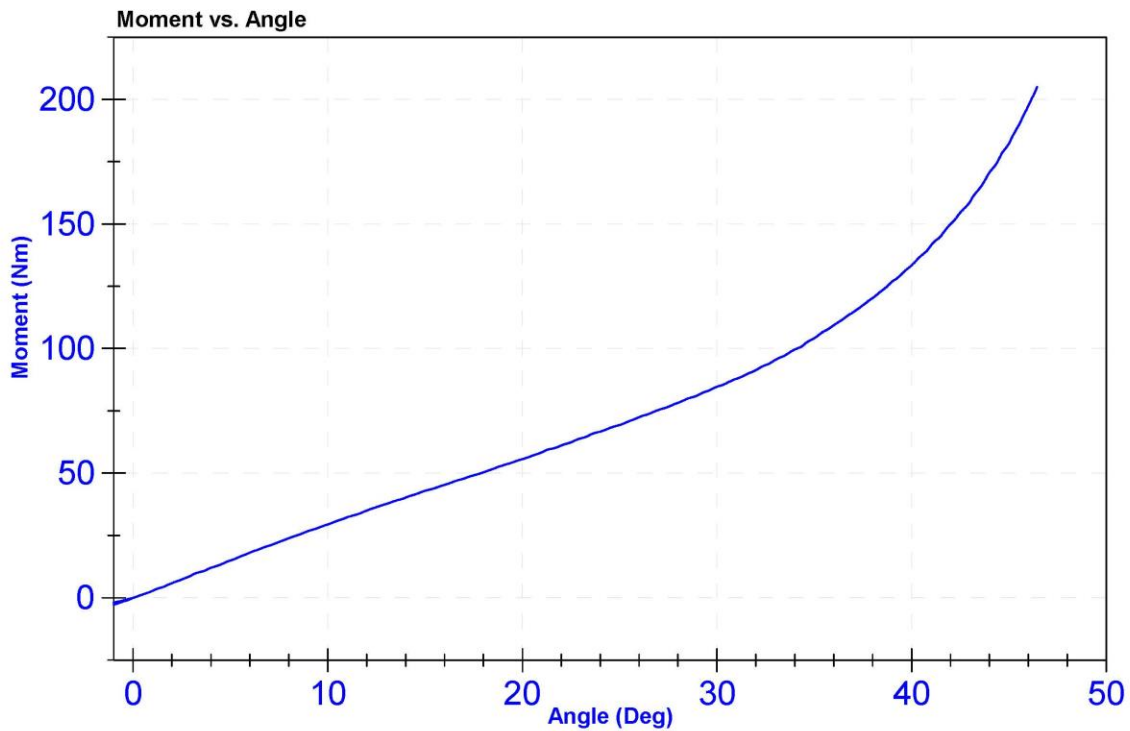


ATD Manufacturer	Humanetics	Test Technician	E. Helenbrook
ATD Serial Number	142	Laboratory Supervisor	K. Brogan



Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	18.9	25.6	°C	21.5	Pass
Humidity	10	70	%	40	Pass
Velocity	2.07	2.13	m/s	2.114	Pass
Maximum Resistive Force	4720	5780	N	5323.0	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	Measurement Specialties	A260568	7/29/2019	1/29/2019

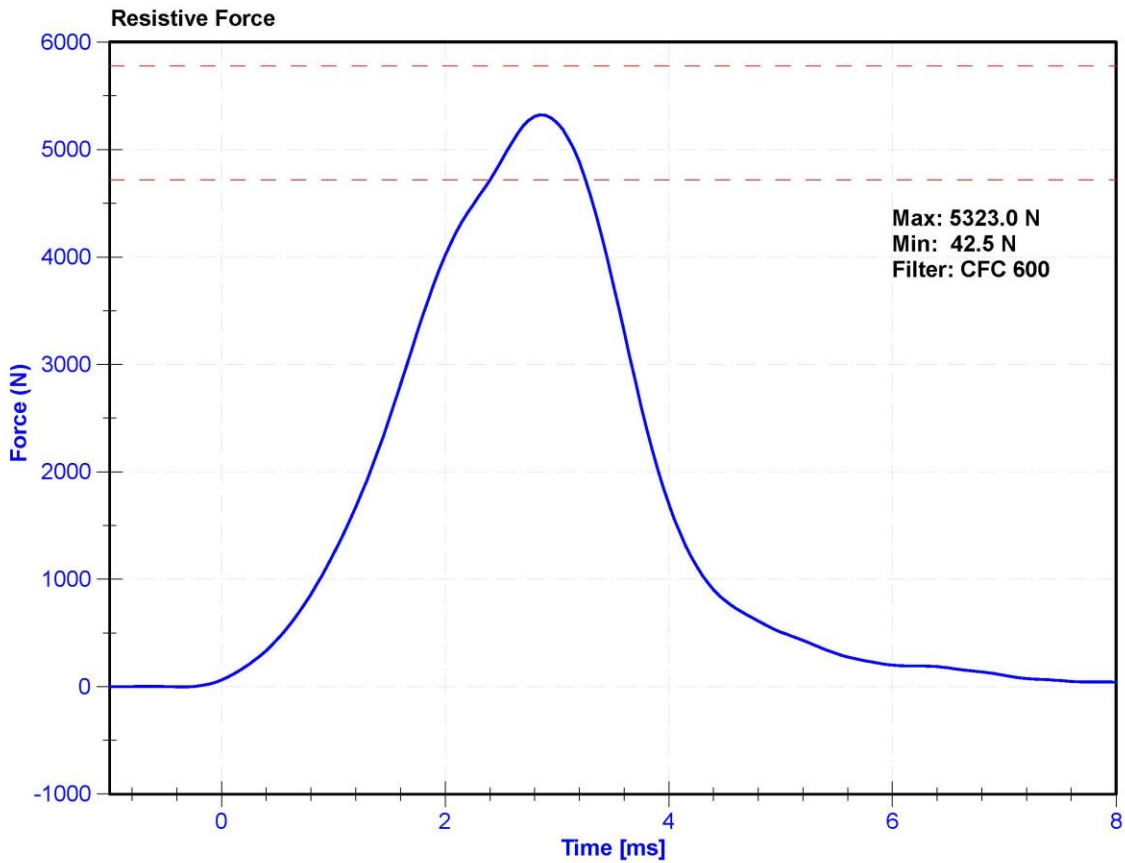

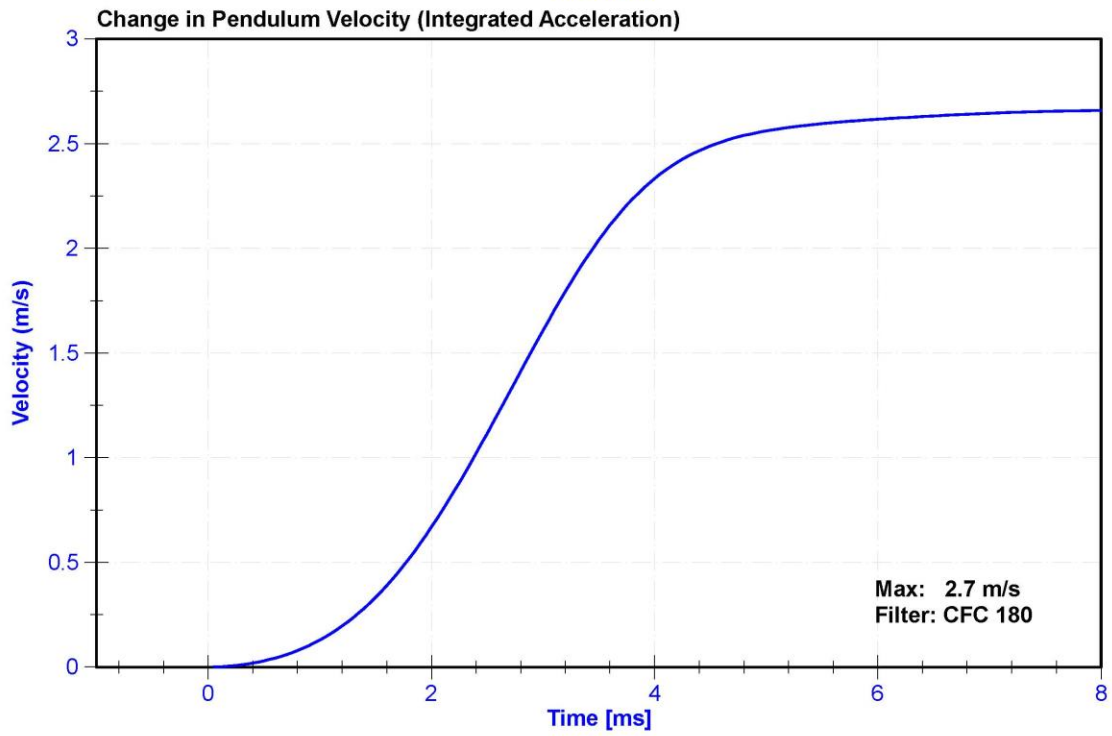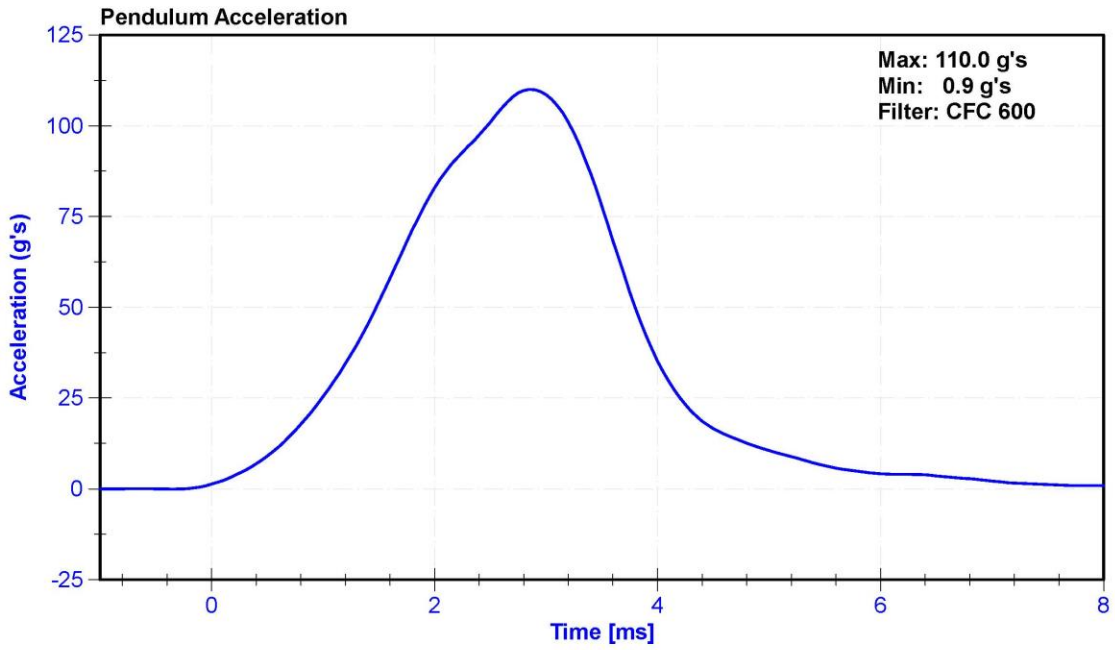


ATD Manufacturer	Humanetics	Test Technician	E. Helenbrook
ATD Serial Number	142	Laboratory Supervisor	K. Brogan



Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	18.9	25.6	°C	21.5	Pass
Humidity	10	70	%	40	Pass
Velocity	2.07	2.13	m/s	2.115	Pass
Maximum Resistive Force	4720	5780	N	5441.7	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	Measurement Specialties	A260568	7/29/2019	1/29/2020

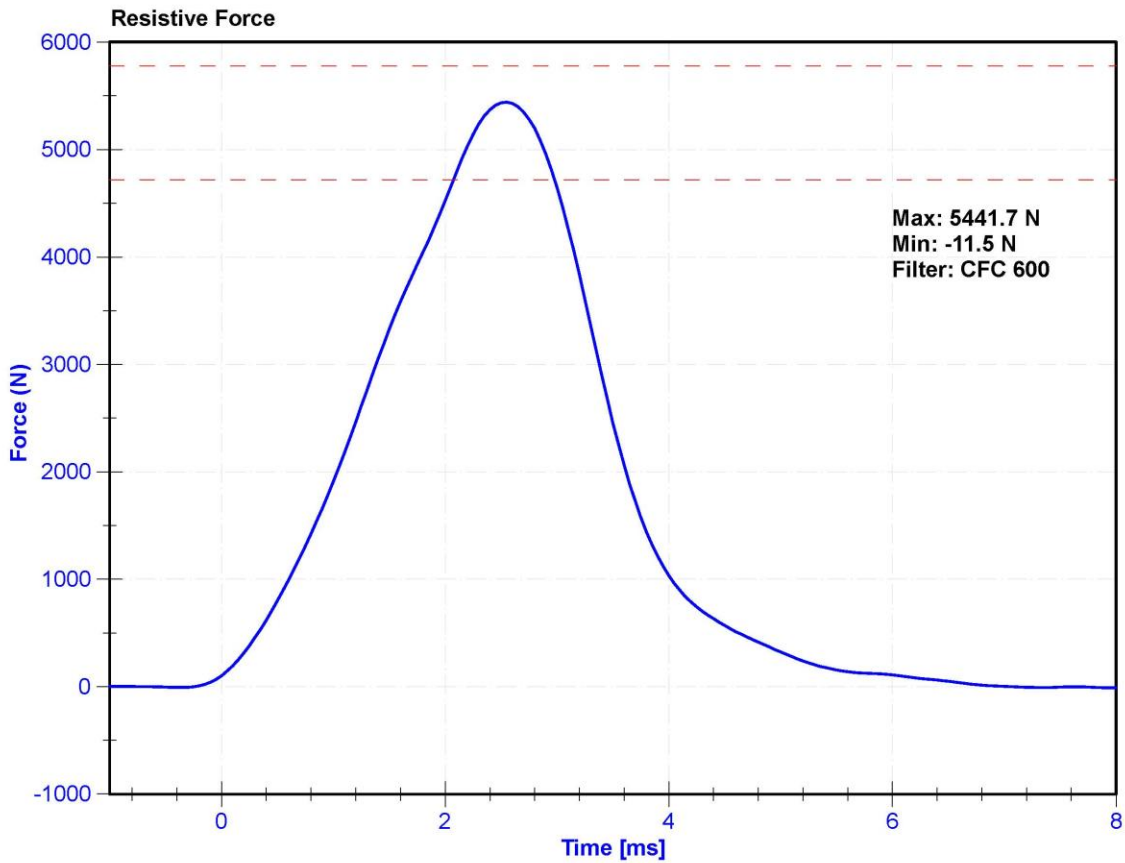

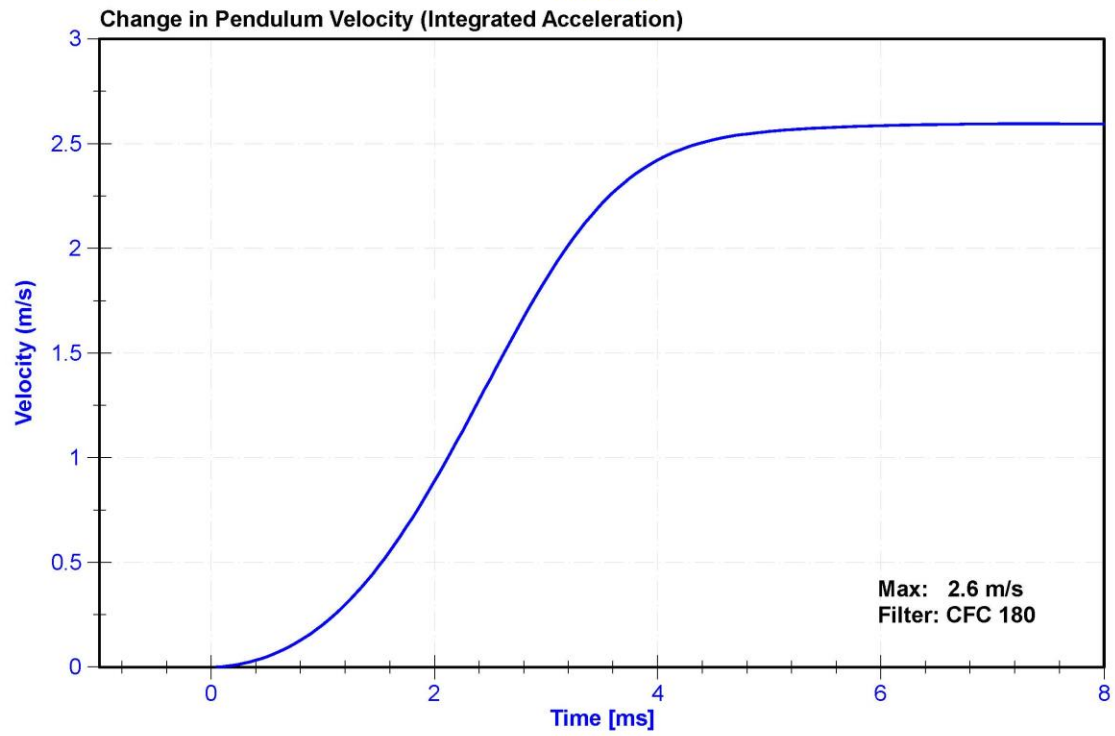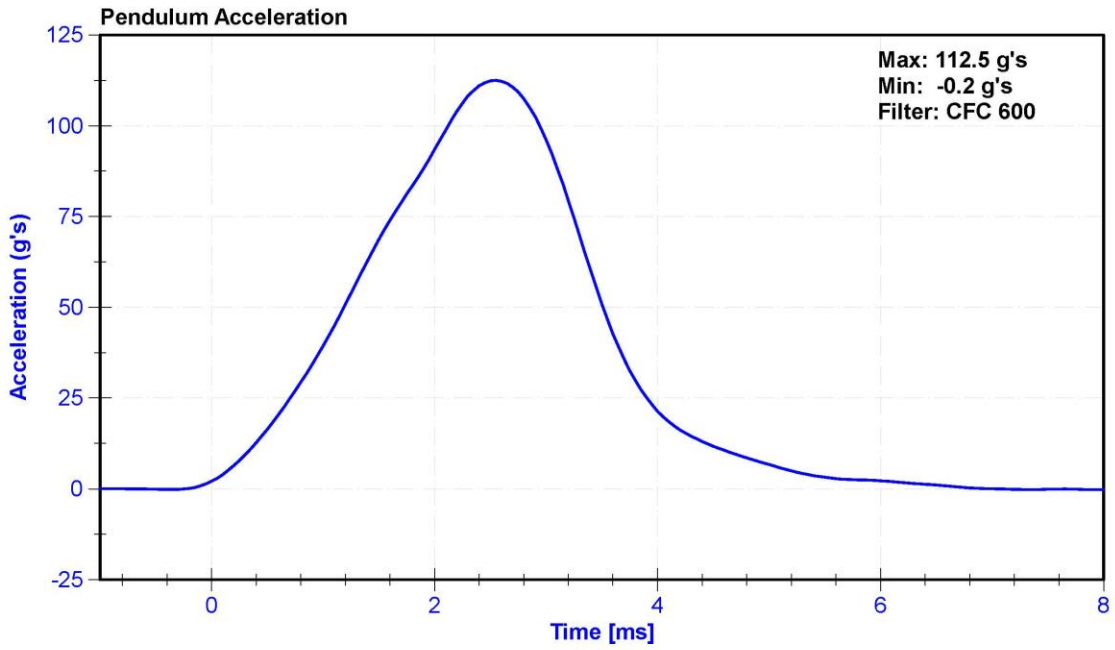

CALIBRATION TEST RESULTS

POST-TEST

HYBRID III 50TH PERCENTILE MALE - DRIVER ATD

SERIAL NO: 142




External Measurements - Hybrid 3 - 50th Male

Technician: K. Dutton

Date: 10/25/2019

Dummy Serial Number: 142

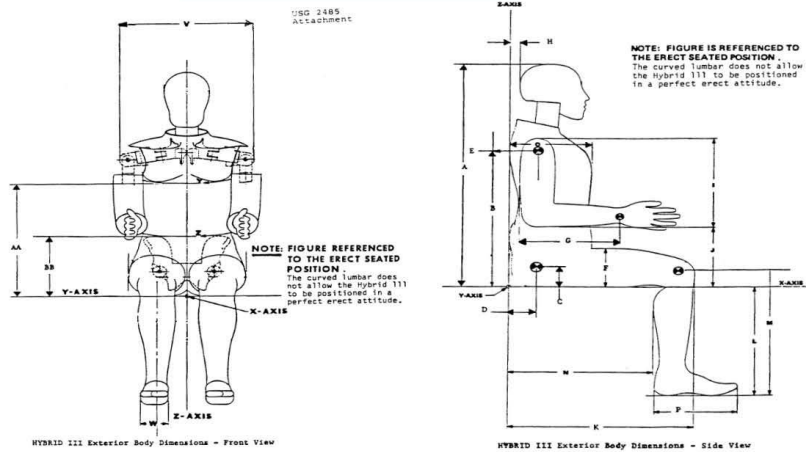

Symbol	Description	Specification (in)		Result (in)	Pass/Fail
A	Sitting Height	34.6	35.0	34.8	Pass
B	Shoulder Pivot Height	19.9	20.5	20.2	Pass
C	H-Point Height	3.3	3.5	3.4	Pass
D	H-Point from Backline	5.3	5.5	5.4	Pass
E	Shoulder Pivot from Backline	3.3	3.7	3.5	Pass
F	Thigh Clearance	5.5	6.1	5.6	Pass
G	Back of Elbow to Wrist Pivot	11.4	12.0	11.7	Pass
H	Head Back to Backline	1.6	1.8	1.7	Pass
I	Shoulder to Elbow Length	13.0	13.6	13.5	Pass
J	Elbow Rest Height	7.5	8.3	8.2	Pass
K	Buttock to Knee Length	22.8	23.8	23.3	Pass
L	Popliteal Height	16.9	17.9	17.4	Pass
M	Knee Pivot Height	19.1	19.7	19.4	Pass
N	Buttock Popliteal Length	17.8	18.8	18.4	Pass
O	Chest Depth without Jacket	8.4	9.0	8.6	Pass
P	Foot Length (right)	9.9	10.5	10.3	Pass
V	Shoulder Breadth	16.3	17.2	16.8	Pass
W	Foot Breadth	3.6	4.2	3.9	Pass
Y	Chest Circumference with Jacket	38.2	39.4	38.9	Pass
Z	Waist Circumference	32.9	34.1	33.7	Pass
AA	Reference Location (Chest Circumference)	16.9	17.1	17.0	Pass
BB	Reference Location (Waist Circumference)	8.9	9.1	9.0	Pass


ATD Manufacturer	Humanetics	Test Technician	K. Dutton
ATD Serial Number	142	Laboratory Supervisor	K. Brogan




Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	18.9	25.6	°C	21.3	Pass
Humidity	10	70	%	42.4	Pass
Resultant Acceleration	225	275	g's	256.2	Pass
Oscillation	0	10	%	2.8	Pass
Lateral Acceleration	-15	15	g's	-5.6	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
X Accelerometer	ENDEVCO 7264	P51681	8/13/2019	2/11/2020
Y Accelerometer	ENDEVCO 7264	P64151	8/13/2019	2/11/2020
Z Accelerometer	ENDEVCO 7264	P52114	8/13/2019	2/11/2020

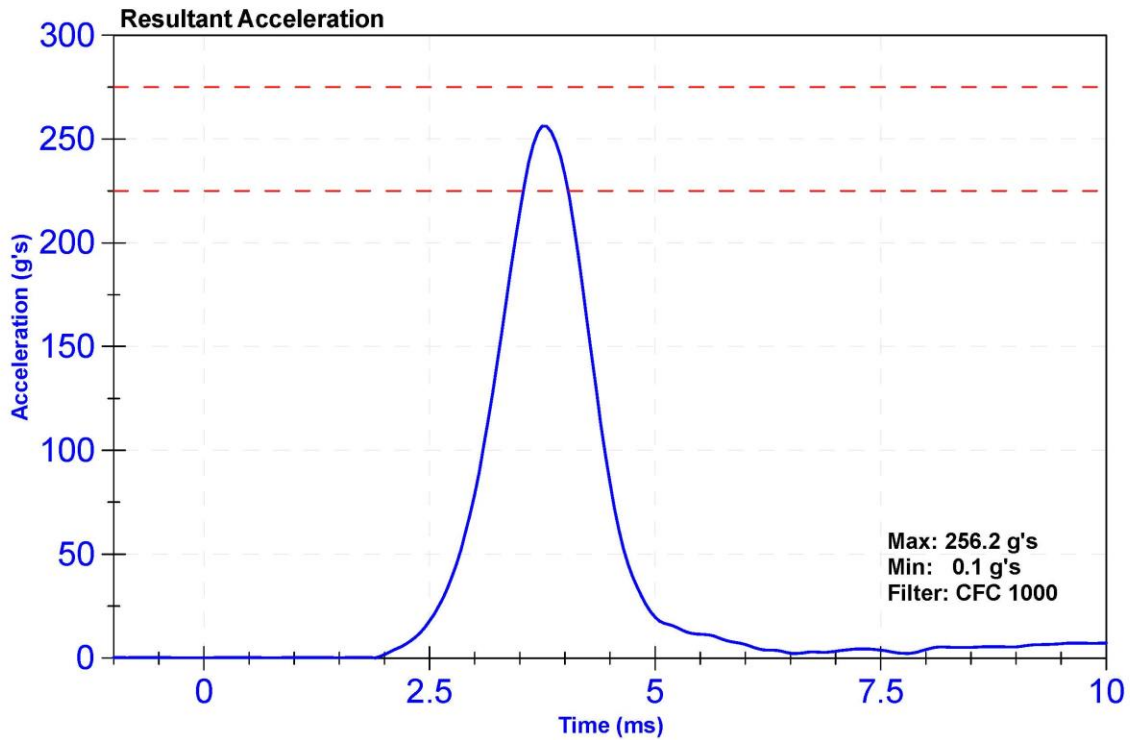

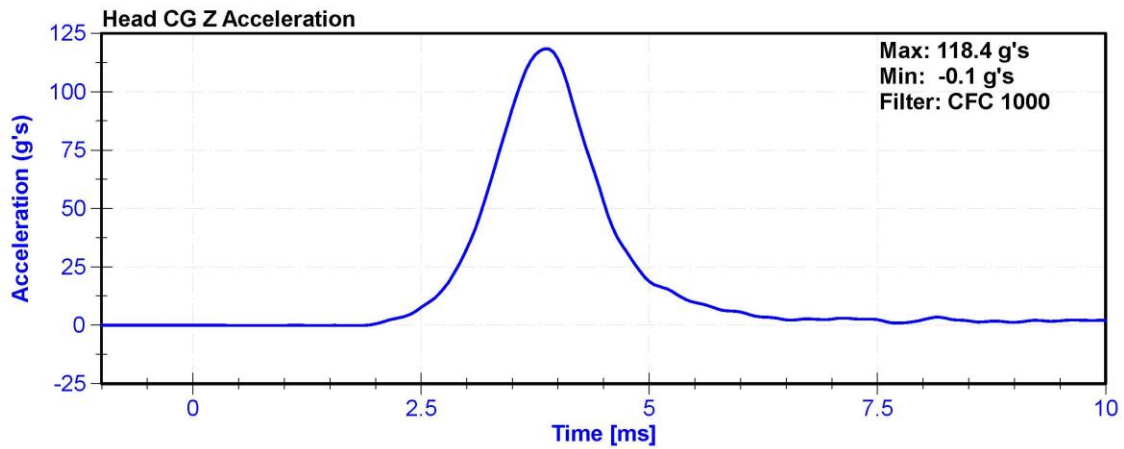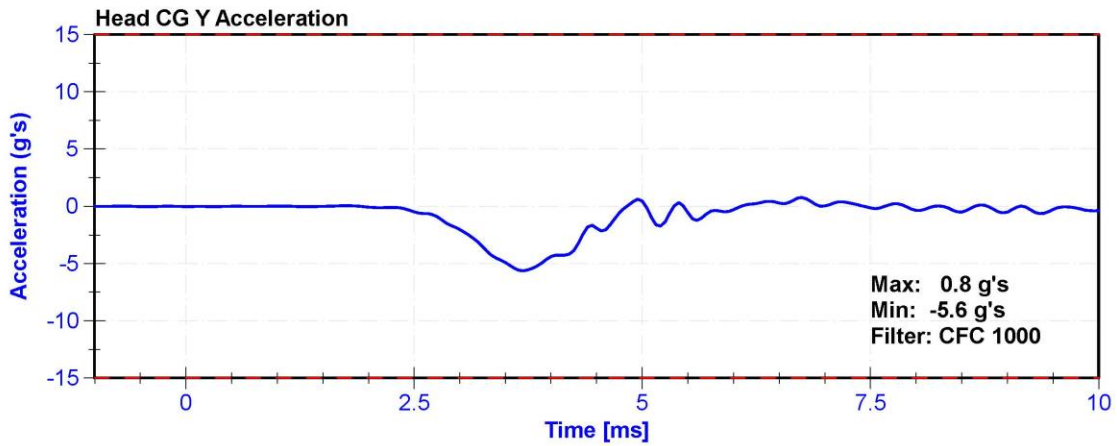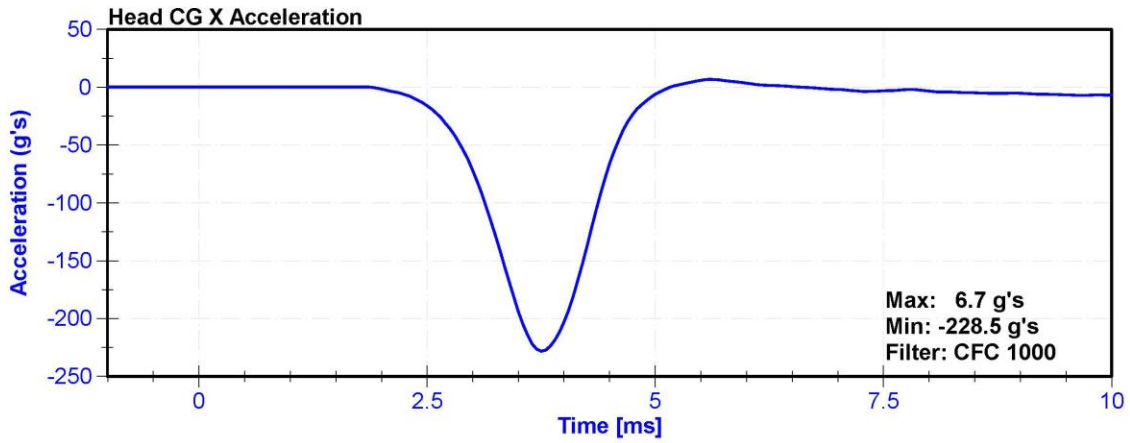



ATD Manufacturer	Humanetics	Test Technician	K. Dutton
ATD Serial Number	142	Laboratory Supervisor	K. Brogan




Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21.6	Pass
Humidity	10	70	%	42.6	Pass
Velocity	6.89	7.13	m/s	6.903	Pass
Pendulum Deceleration at 10ms	22.5	27.5	g's	26.20	Pass
Pendulum Deceleration at 20ms	17.6	22.6	g's	21.29	Pass
Pendulum Deceleration at 30ms	12.5	18.5	g's	16.31	Pass
Max. Pendulum Deceleration After 30ms	0	29	g's	26.3	Pass
Pendulum Deceleration Time to 5 g's	34	42	ms	39.6	Pass
Maximum D Plane Rotation	64	78	deg	76.0	Pass
Time to Maximum Rotation	57	64	ms	60.7	Pass
Rotation Decay to Zero	113	127	ms	118.0	Pass
Moment About Occipital Condyle	88.1	108.4	Nm	94.27	Pass
Time to Maximum Moment	47	58	ms	53.6	Pass
Moment Decay to Zero	97	107	ms	102.5	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	ENDEVCO 7231CT	AC-AH5M9 Pend	1/29/2019	1/29/2020
Pendulum Potentiometer	ETI SP22G	DS-LABPOT1	11/15/2018	11/15/2019
Condyle Potentiometer	ETI SP22G	DS-LABPOT2	11/15/2018	11/15/2019
Upper Neck Load Cell	FTSS IF-205	LC-161Fx	9/25/2019	9/24/2020

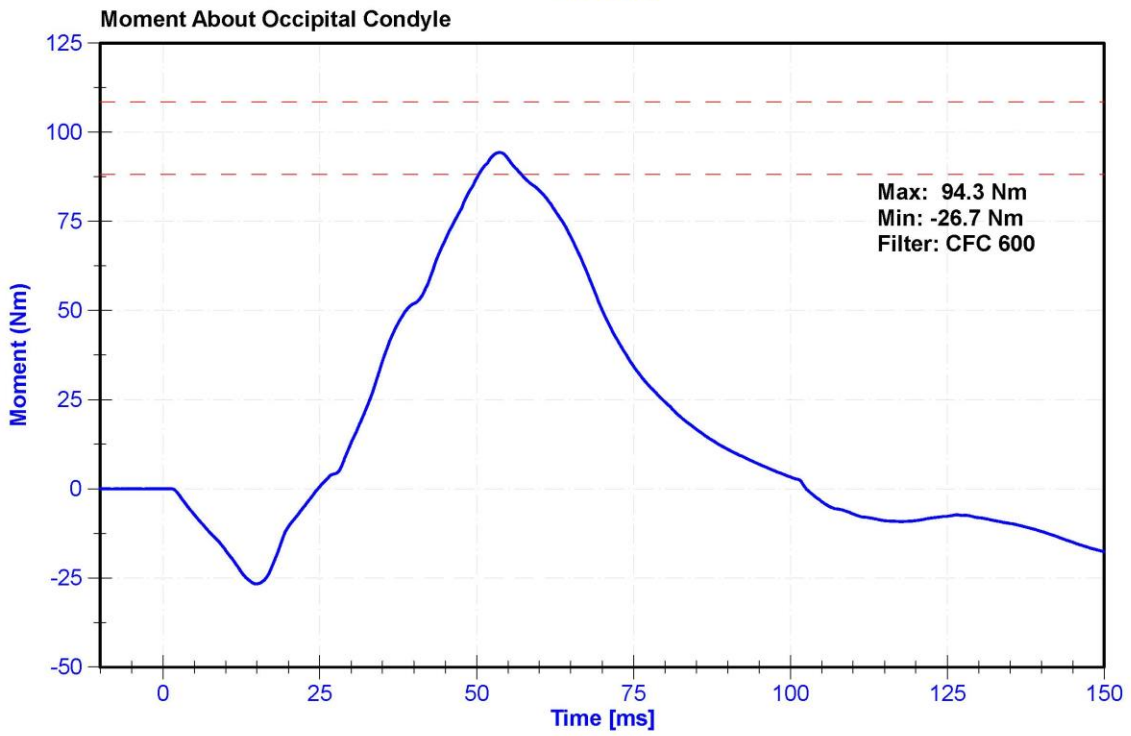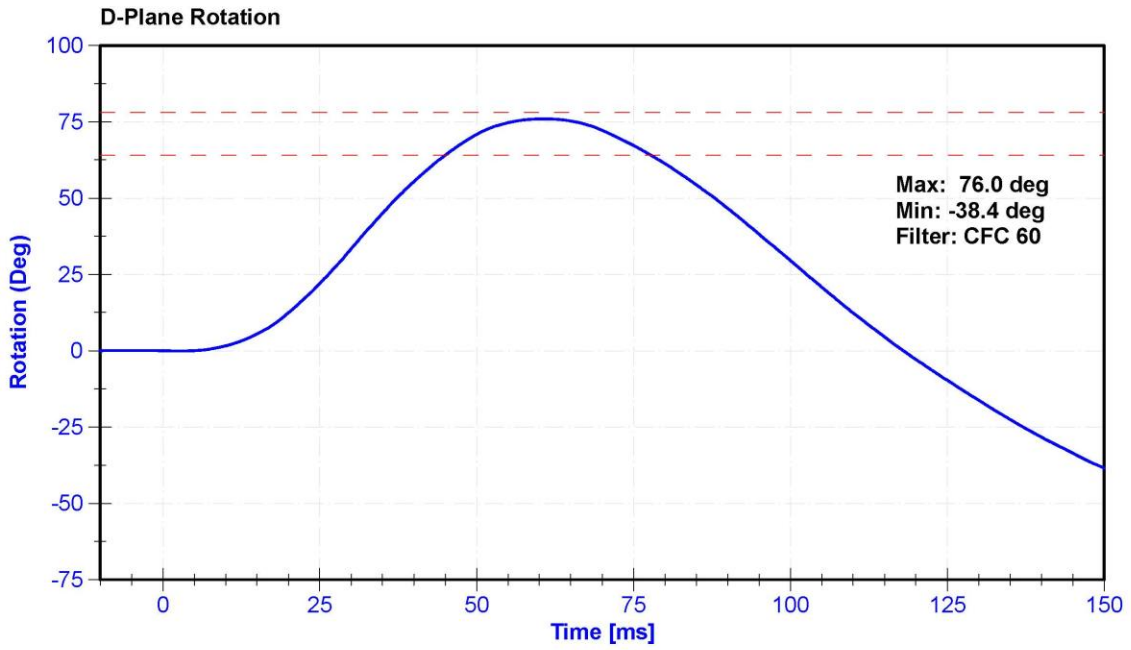

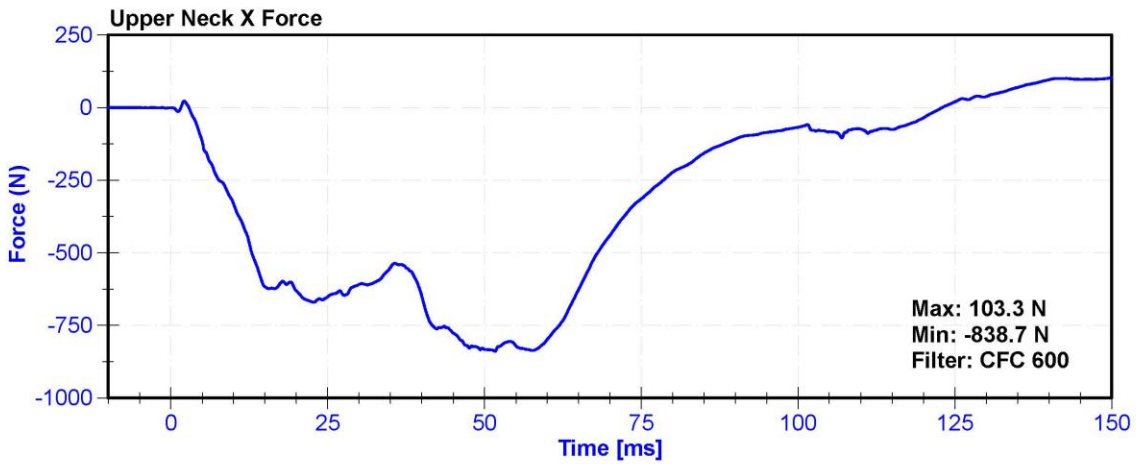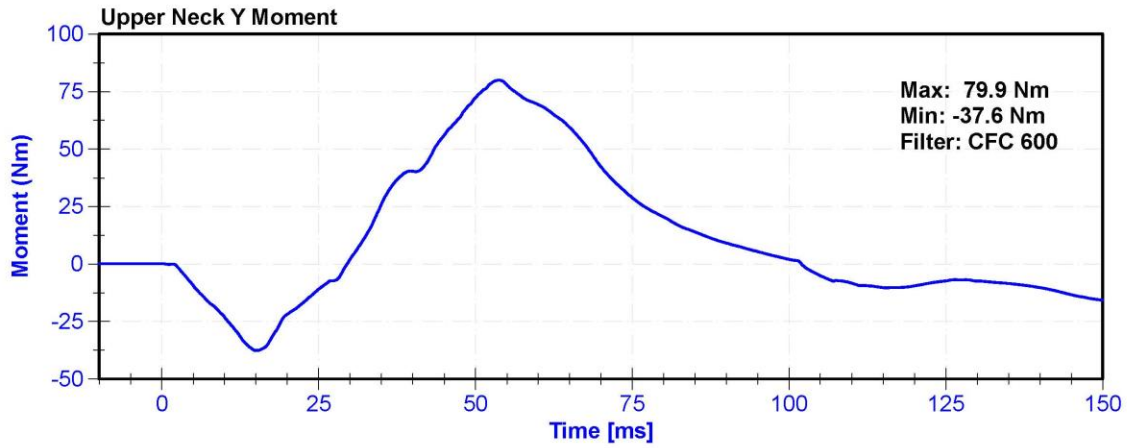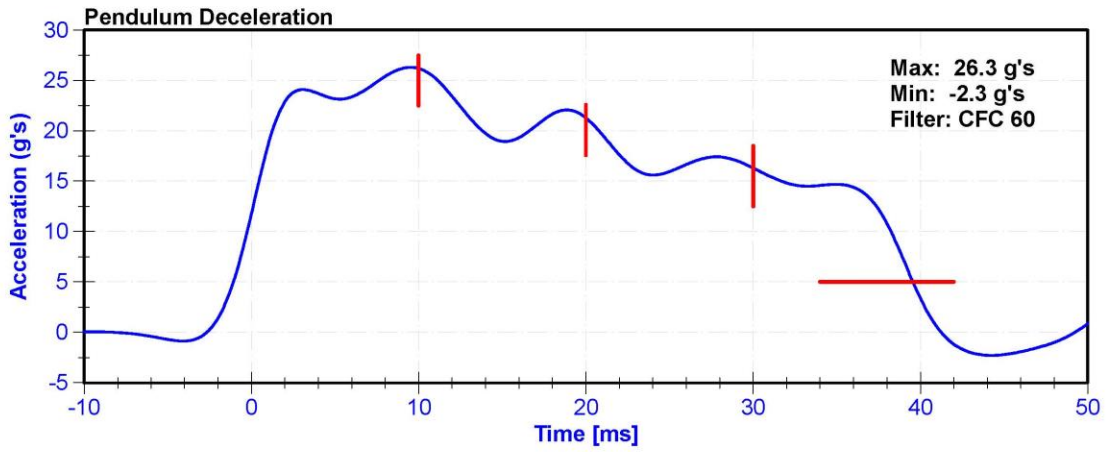



ATD Manufacturer	Humanetics	Test Technician	K. Dutton
ATD Serial Number	142	Laboratory Supervisor	K. Brogan




Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	22	Pass
Humidity	10	70	%	50.8	Pass
Velocity	5.94	6.19	m/s	6.005	Pass
Pendulum Deceleration at 10ms	17.2	21.2	g's	20.25	Pass
Pendulum Deceleration at 20ms	14	19	g's	17.6	Pass
Pendulum Deceleration at 30ms	11	16	g's	13.3	Pass
Max. Pendulum Deceleration After 30ms	0	22	g's	20.4	Pass
Pendulum Deceleration Time to 5 g's	38	46	ms	43.0	Pass
Maximum D Plane Rotation	81	106	deg	100.3	Pass
Time to Maximum Rotation	72	82	ms	77.2	Pass
Rotation Decay to Zero	147	174	ms	157.3	Pass
Minimum Moment About OC	-80	-52.9	Nm	-72.27	Pass
Time to Minimum Moment	65	79	ms	72.5	Pass
Moment Decay to Zero	120	148	ms	142.0	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	ENDEVCO 7231CT	AC-AH5M9 Pend	1/29/2019	1/29/2020
Pendulum Potentiometer	ETI SP22G	DS-LABPOT1	11/15/2018	11/15/2019
Condyle Potentiometer	ETI SP22G	DS-LABPOT2	11/15/2018	11/15/2019
Upper Neck Load Cell	FTSS IF-205	LC-161Fx	9/25/2019	9/24/2020

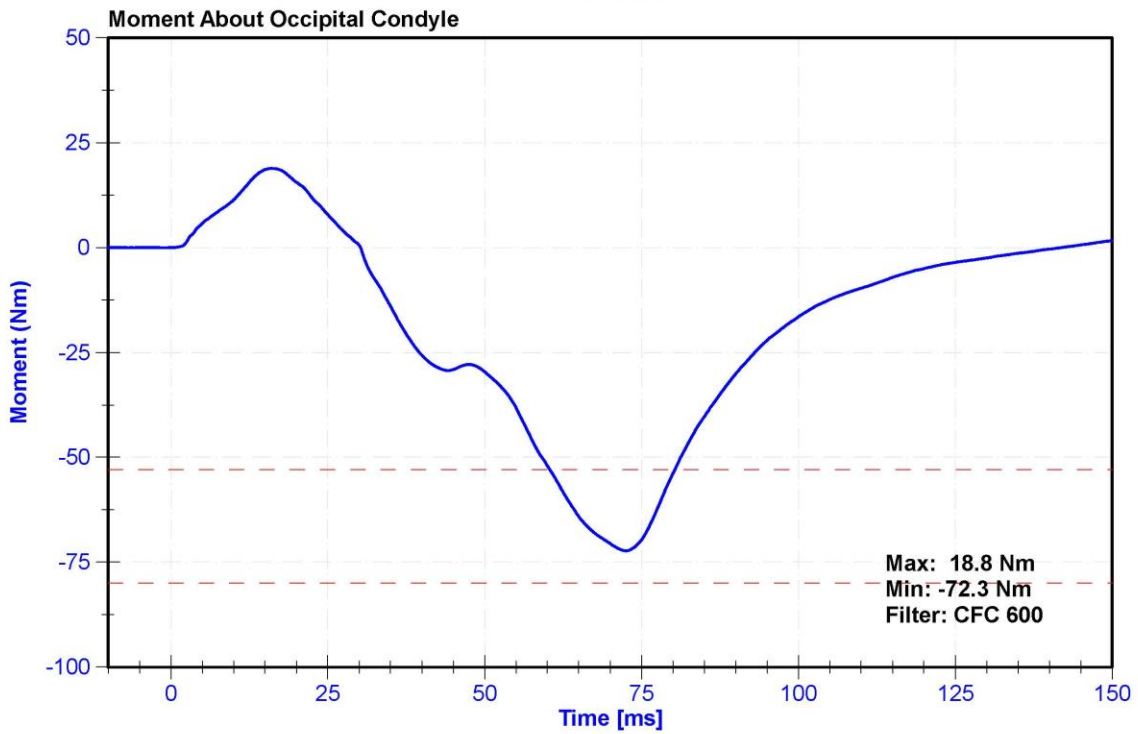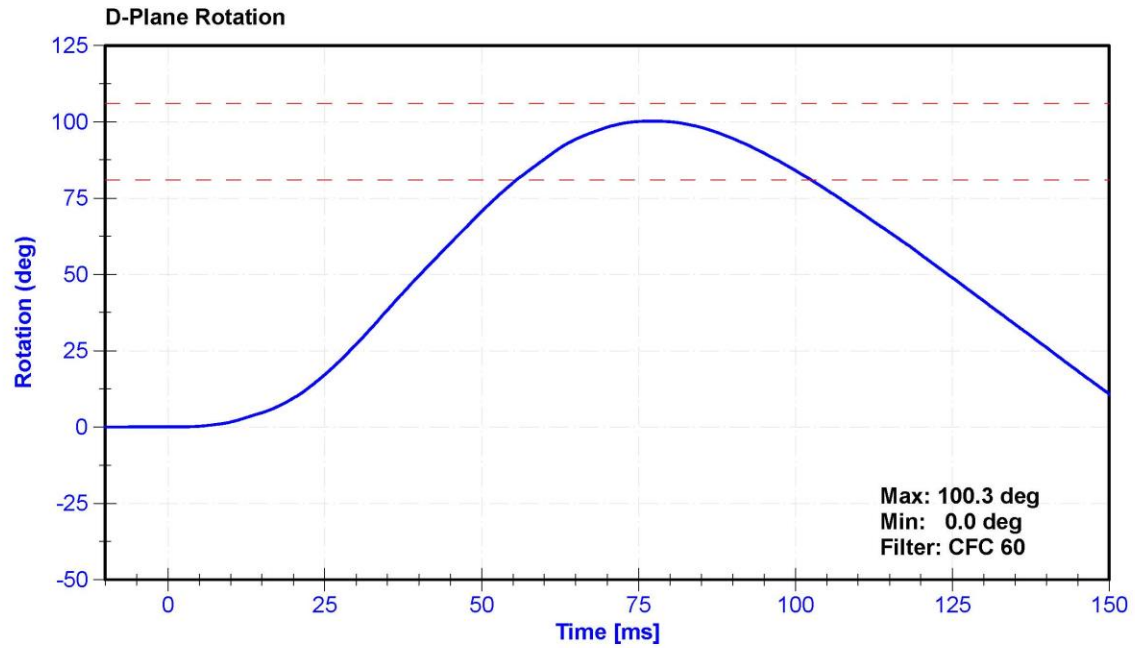

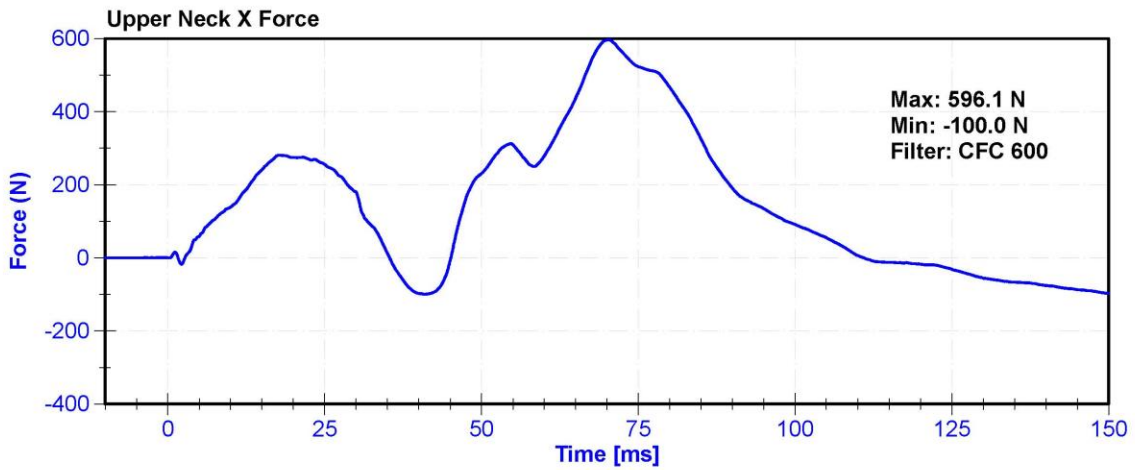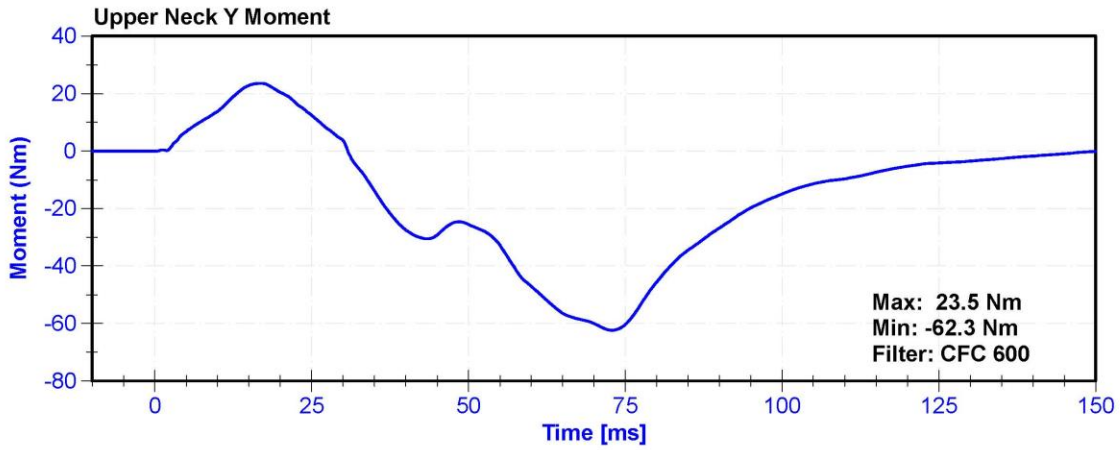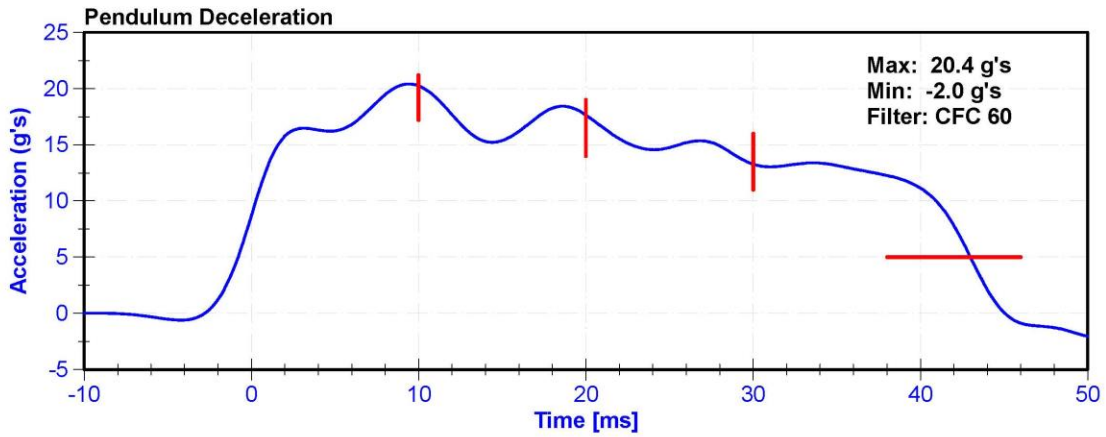


ATD Manufacturer	Humanetics	Test Technician	D.Reinhard
ATD Serial Number	142	Laboratory Supervisor	K.Brogan



Results



Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21.3	Pass
Humidity	10	70	%	49	Pass
Velocity	6.59	6.83	m/s	6.758	Pass
Chest Displacement	-72.6	-63.5	mm	-71.30	Pass
Resistive Force	5160	5894	N	5690.3	Pass
Hysteresis	65	85	%	67.1	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	MSI 64C-2000	A260487	8/22/2019	2/20/2020
Chest Potentiometer	JDK 6209-2038	DS-142	9/12/2019	9/11/2020

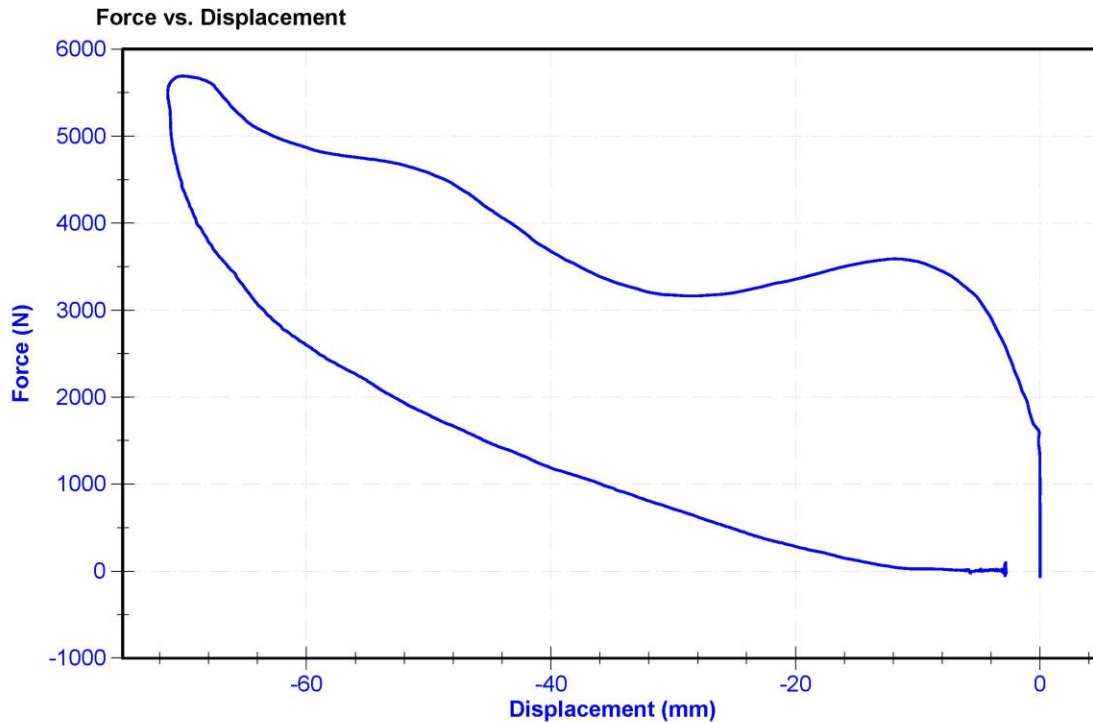

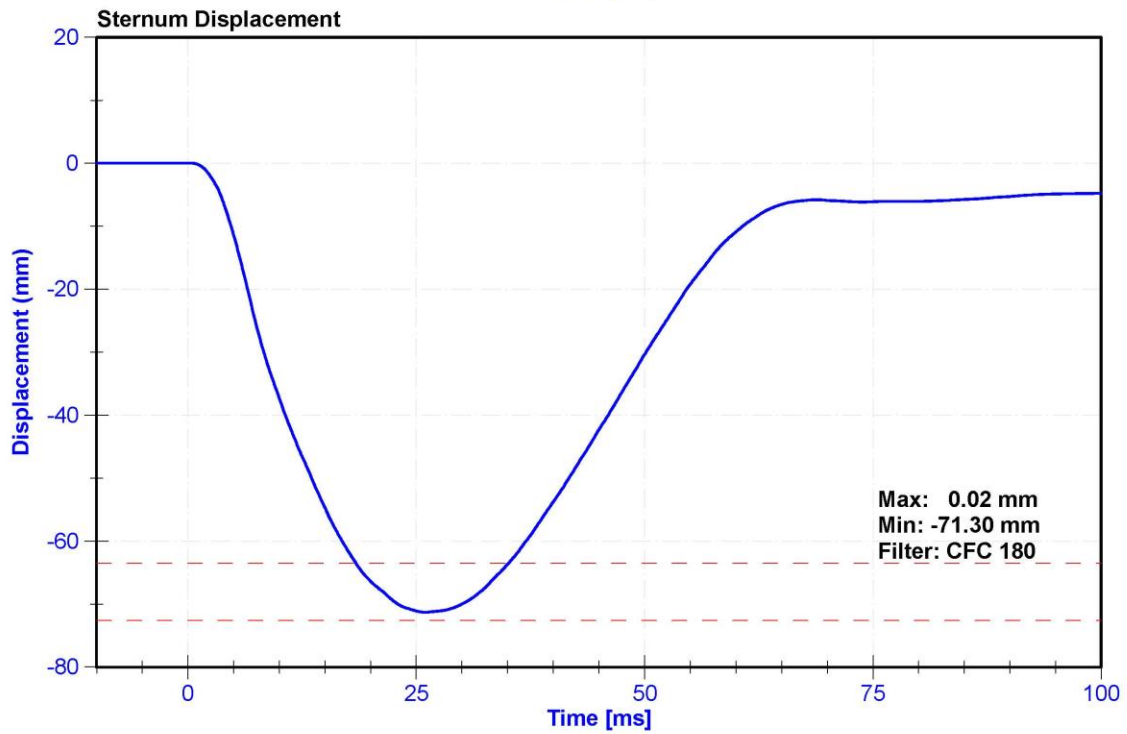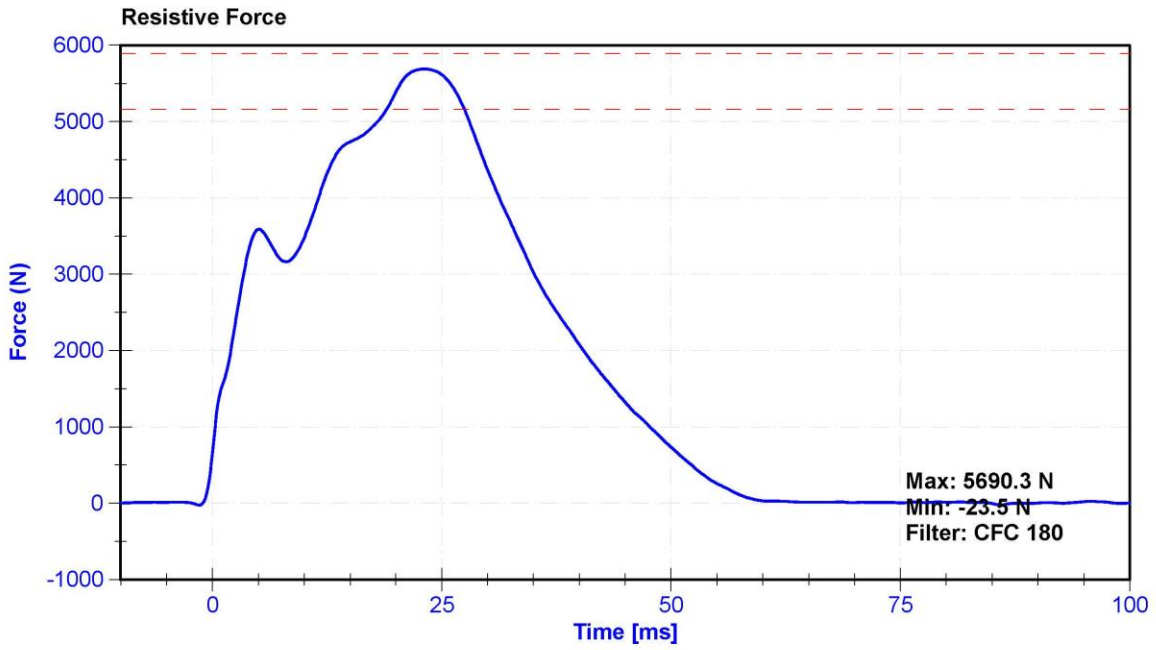

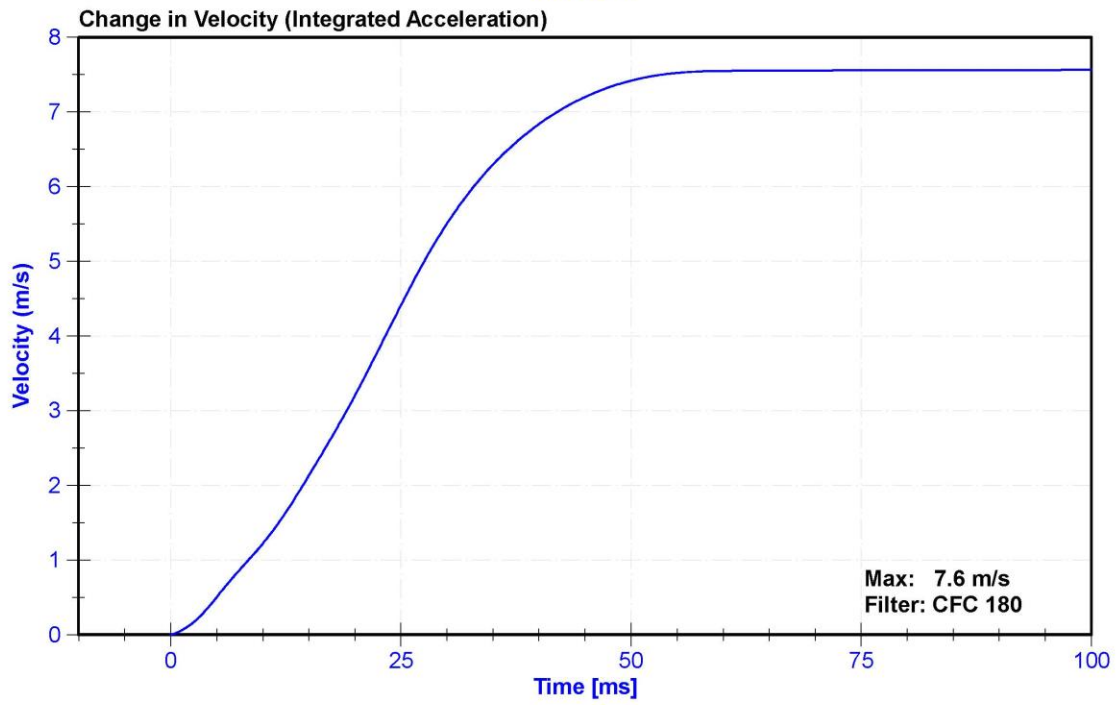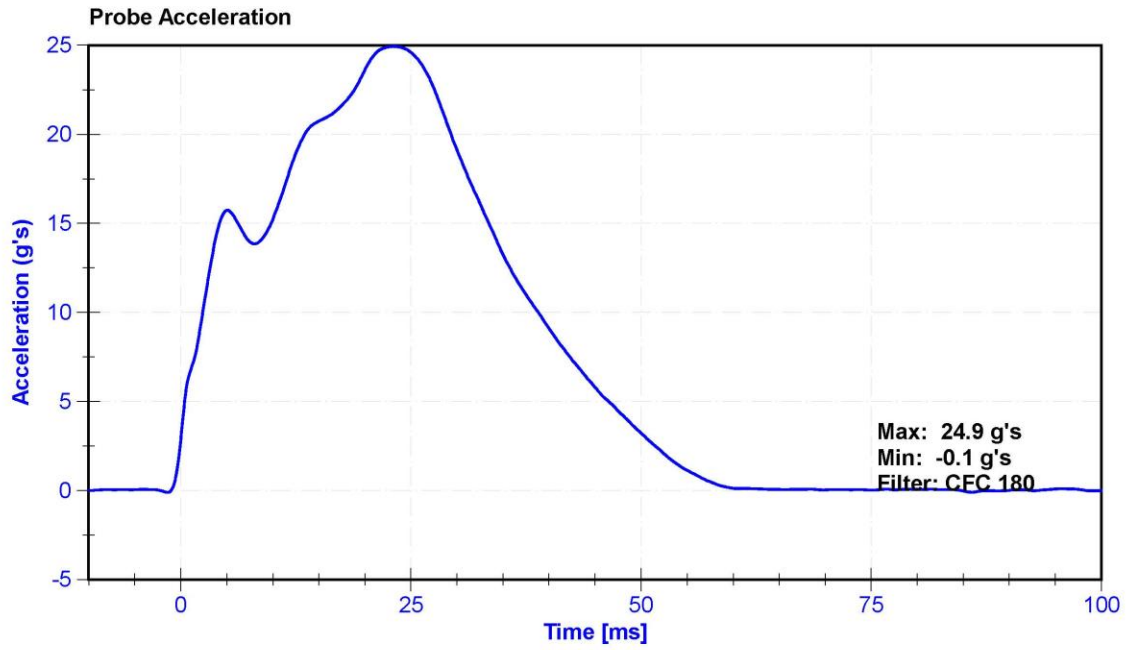


ATD Manufacturer	Humanetics	Test Technician	K. Dutton
ATD Serial Number	142	Laboratory Supervisor	K. Brogan

Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	18.9	25.6	°C	21.3	Pass
Humidity	10	70	%	42.5	Pass
Average Velocity	5	10	deg/s	7.3	Pass
Angle at 203Nm	40	50	deg	44.6	Pass
Moment at 30 degrees	0	94.9	Nm	82.8	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Potentiometer	ETI SP22	DS-0008	9/18/2019	9/18/2020
Load Cell	Key Trans 2301-02	LC-115 My	9/12/2019	9/11/2020

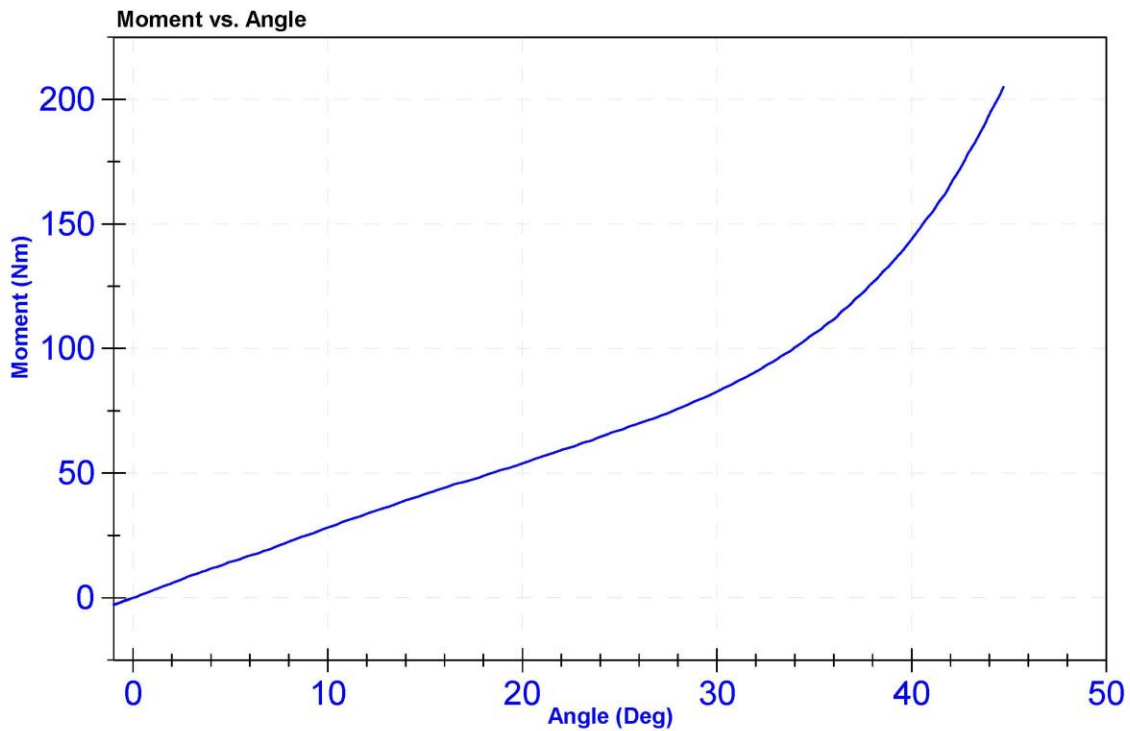


ATD Manufacturer	Humanetics	Test Technician	K. Dutton
ATD Serial Number	142	Laboratory Supervisor	K. Brogan

Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	18.9	25.6	°C	21.3	Pass
Humidity	10	70	%	42.1	Pass
Average Velocity	5	10	deg/s	7.4	Pass
Angle at 203Nm	40	50	deg	47.3	Pass
Moment at 30 degrees	0	94.9	Nm	82.7	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Potentiometer	ETI SP22	DS-0008	9/18/2019	9/18/2020
Load Cell	Key Trans 2301-02	LC-115 My	9/12/2019	9/11/2020

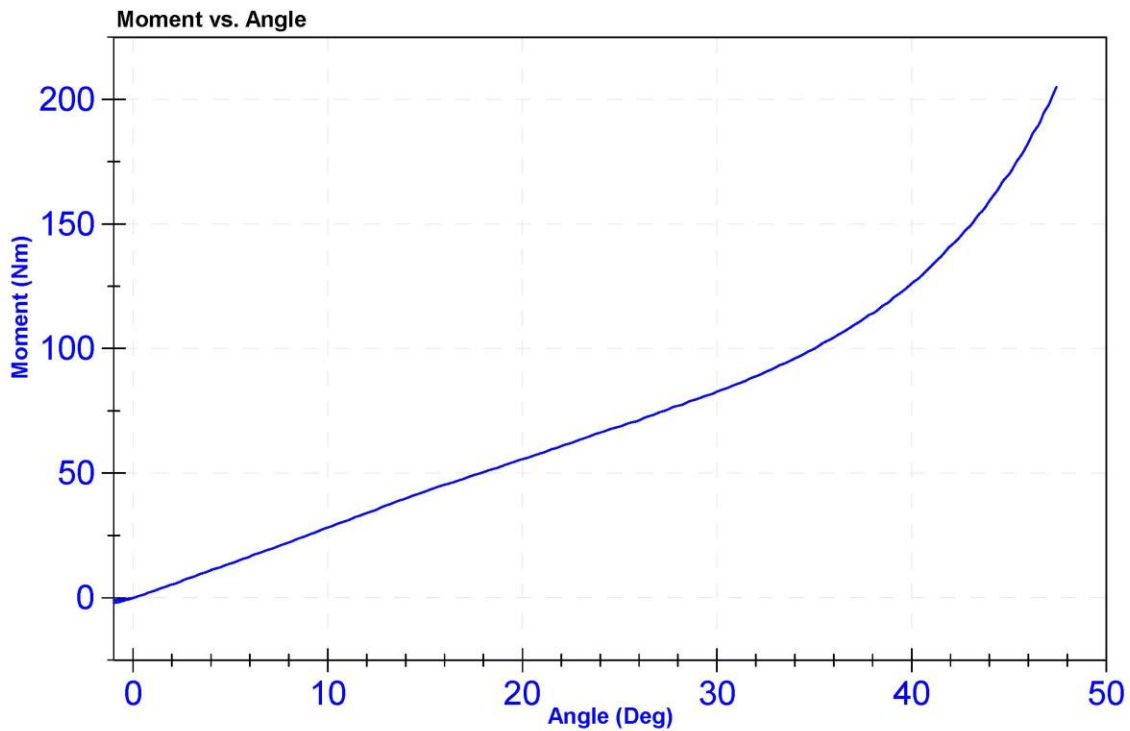


ATD Manufacturer	Humanetics	Test Technician	E. Helenbrook
ATD Serial Number	142	Laboratory Supervisor	K. Brogan



Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	18.9	25.6	°C	21.6	Pass
Humidity	10	70	%	37.0	Pass
Velocity	2.07	2.13	m/s	2.121	Pass
Maximum Resistive Force	4720	5780	N	5477.9	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	Measurement Specialties	A260568	7/29/2019	1/29/2020

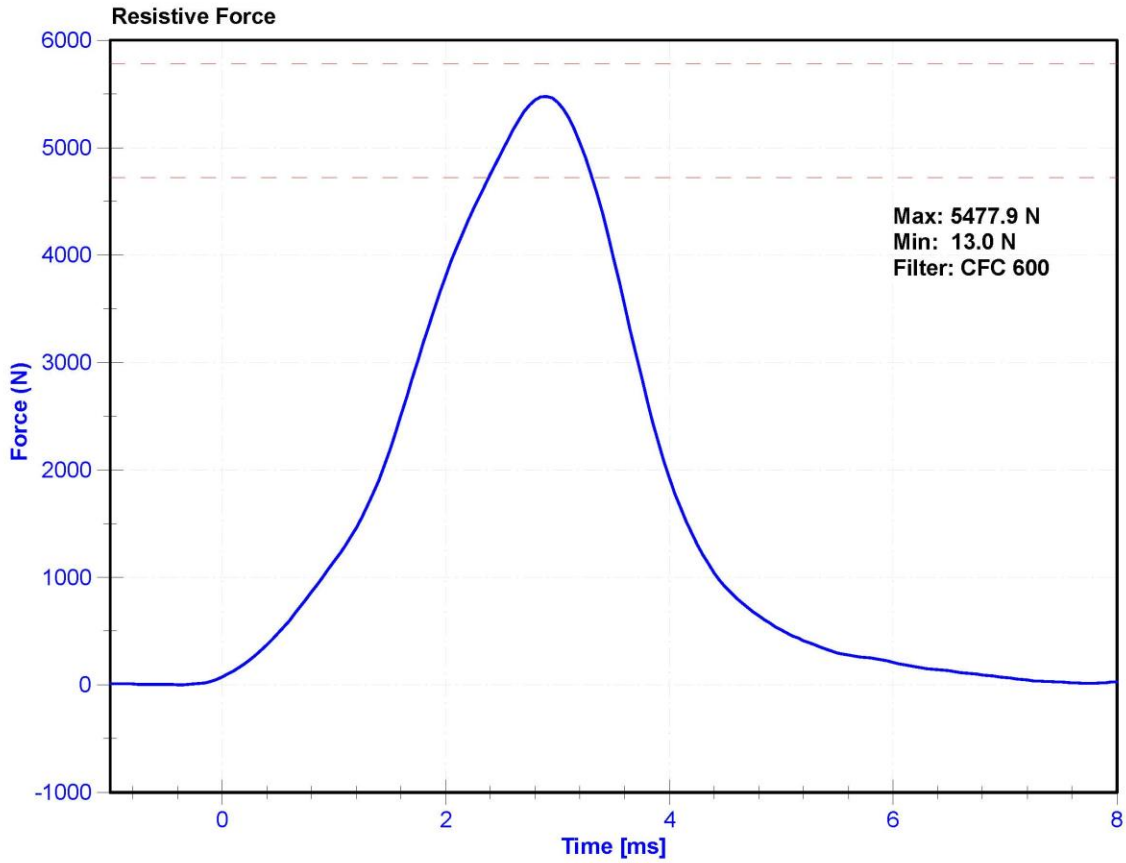

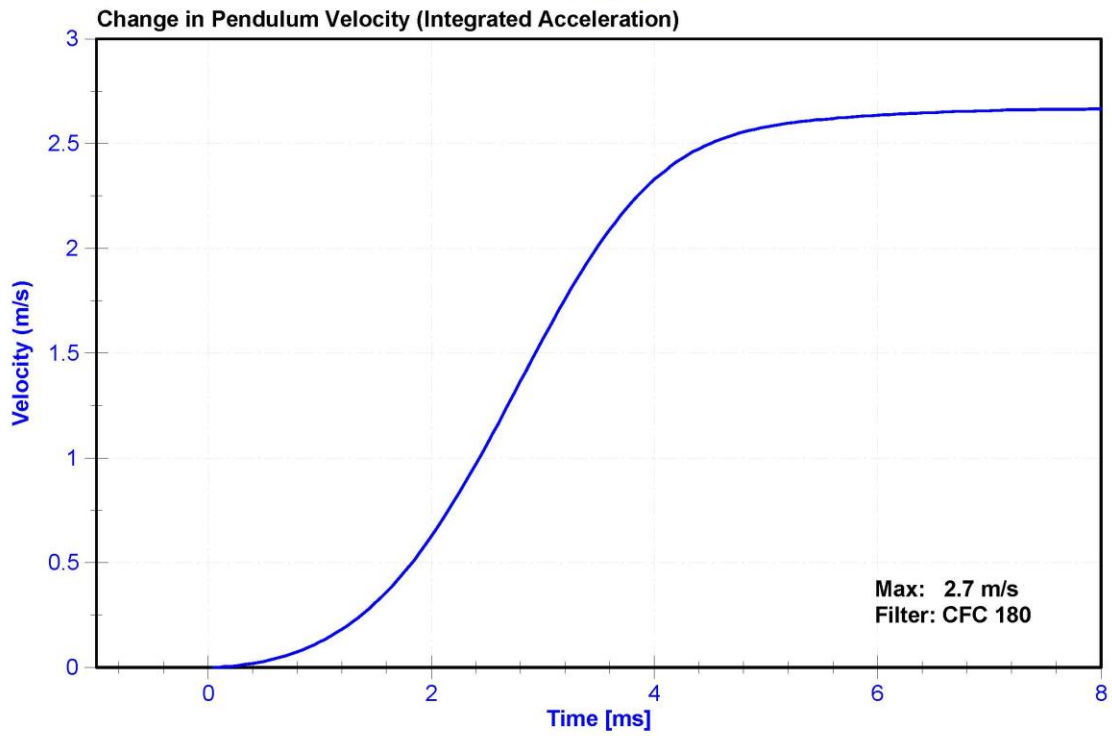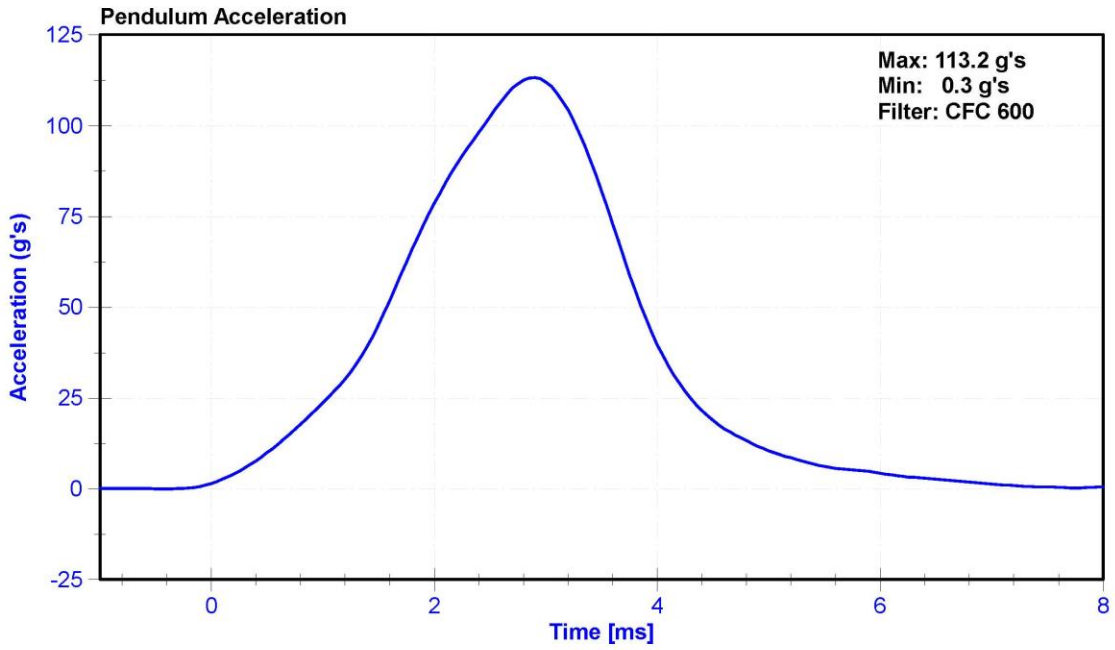


ATD Manufacturer	Humanetics	Test Technician	E. Helenbrook
ATD Serial Number	142	Laboratory Supervisor	K. Brogan



Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	18.9	25.6	°C	21.7	Pass
Humidity	10	70	%	36.5	Pass
Velocity	2.07	2.13	m/s	2.121	Pass
Maximum Resistive Force	4720	5780	N	5472.0	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	Measurement Specialties	A260568	7/29/2019	1/29/2020

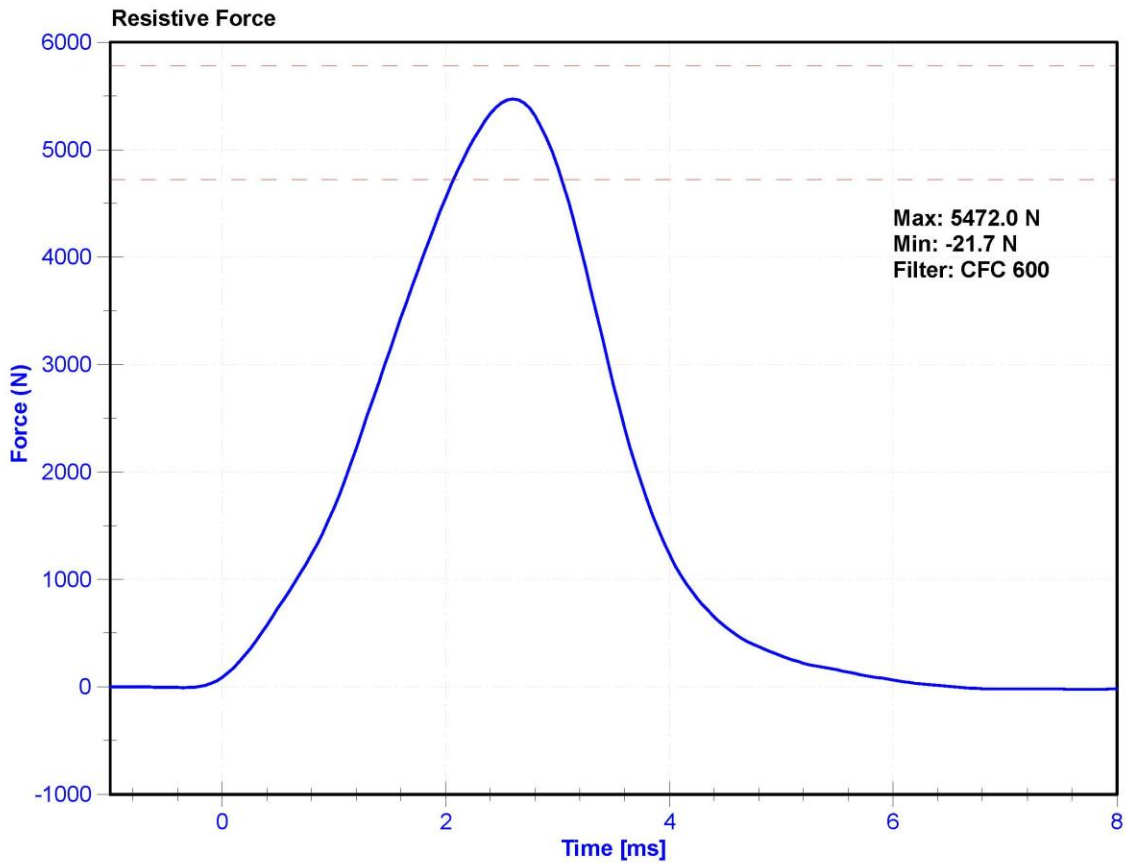

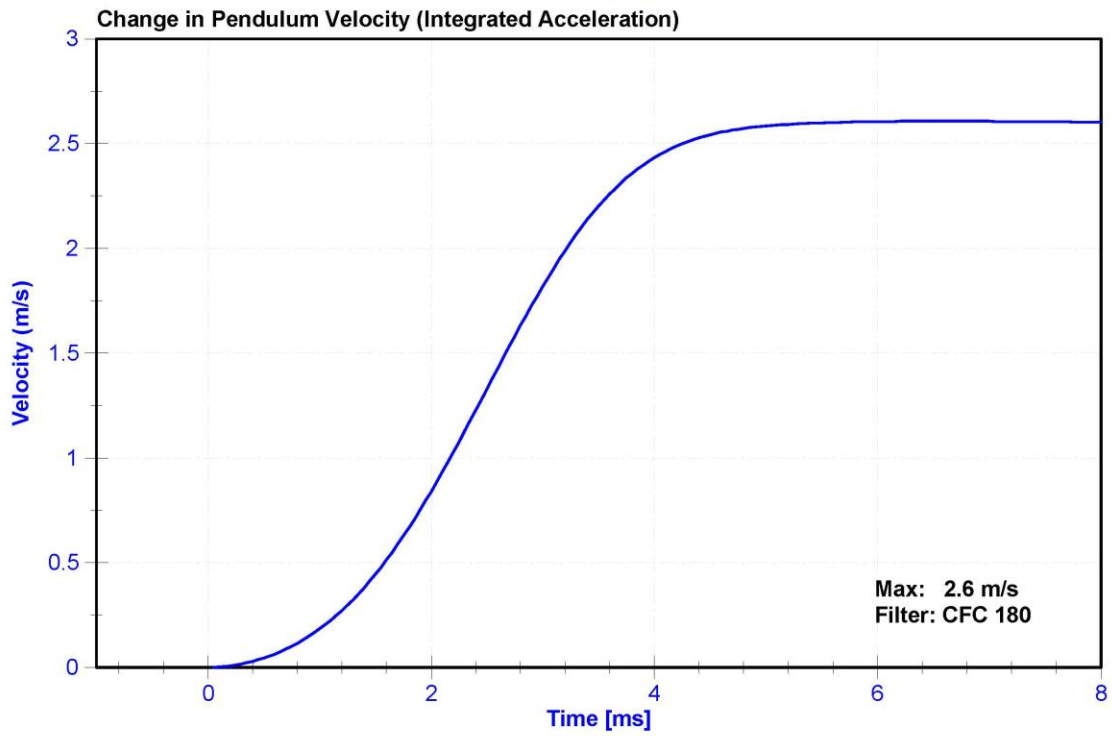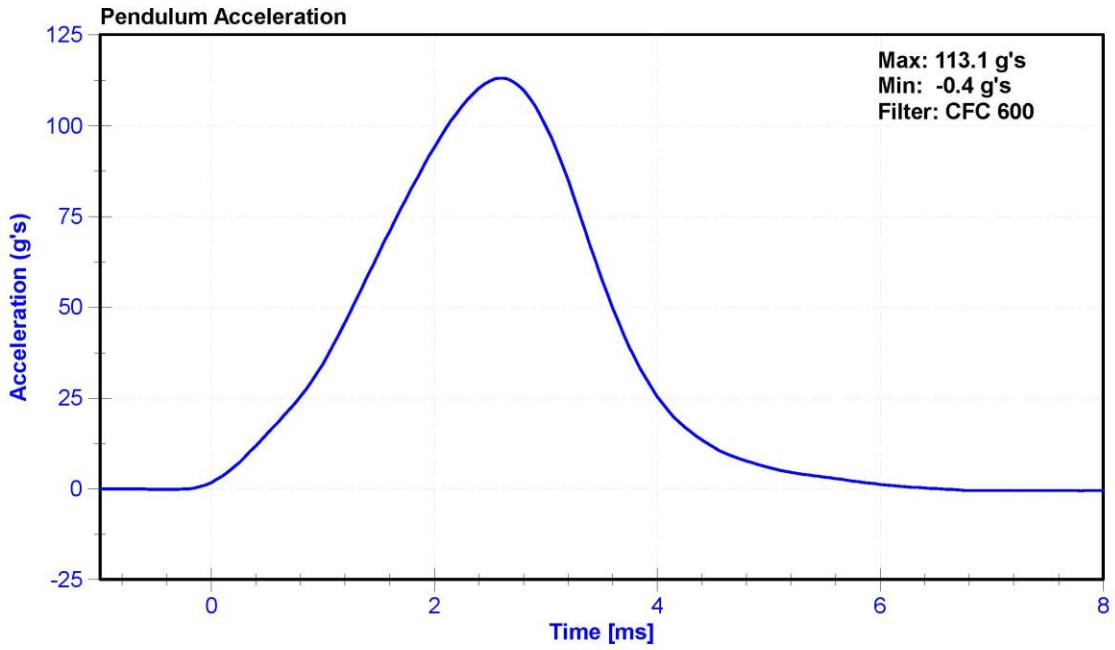

CALIBRATION TEST RESULTS

POST-TEST

HYBRID III 5TH PERCENTILE FEMALE - PASSENGER ATD

SERIAL NO: 140




External Measurements - Hybrid 3 - 5th Female

Technician: K. Brogan

Date: 10/25/2019

Dummy Serial Number: 140

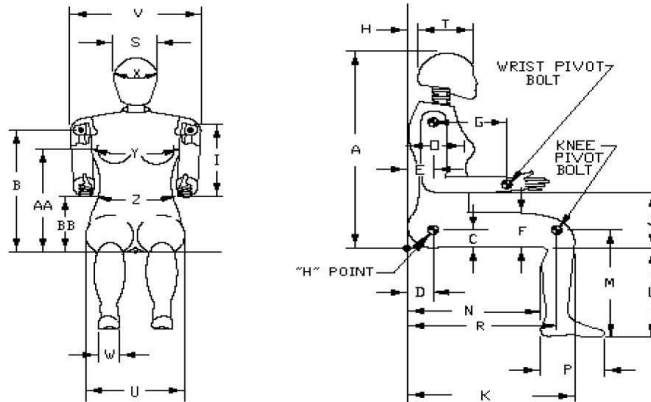

Symbol	Description	Specification (mm)		Result (mm)	Pass/Fail
A	Sitting Height	775	800	791	Pass
B	Shoulder Pivot Height	432	457	442	Pass
C	H-Point Height	81	86	84	Pass
D	H-Point from Backline	145	150	147	Pass
E	Shoulder Pivot from Backline	69	84	73	Pass
F	Thigh Clearance	119	135	126	Pass
G	Back of Elbow to Wrist Pivot	244	259	251	Pass
H	Head Back to Backline	43	48	45	Pass
I	Shoulder to Elbow Length	277	297	290	Pass
J	Elbow Rest Height	183	203	191	Pass
K	Buttock to Knee Length	521	546	535	Pass
L	Popliteal Height	356	376	366	Pass
M	Knee Pivot Height	394	419	405	Pass
N	Buttock Popliteal Length	414	439	428	Pass
O	Chest Depth without Jacket	175	191	182	Pass
P	Foot Length (right)	219	234	228	Pass
R	Buttock To Knee Pivot Length	457	483	467	Pass
S	Head Breadth	137	147	142	Pass
T	Head Depth	178	188	180	Pass
U	Hip Breadth	300	315	313	Pass
V	Shoulder Breadth	351	366	361	Pass
W	Foot Breadth	79	94	83	Pass
X	Head Circumference	528	549	540	Pass
Y	Chest Circumference with Jacket	851	881	874	Pass
Z	Waist Circumference	460	790	624	Pass
AA	Reference Location (Chest Circumference)	333	358	345	Pass
BB	Reference Location (Waist Circumference)	160	170	165	Pass


ATD Manufacturer	Humanetics	Test Technician	K. Dutton
ATD Serial Number	140	Laboratory Supervisor	K. Brogan




Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	18.9	25.6	°C	21.3	Pass
Humidity	10	70	%	43.6	Pass
Resultant Acceleration	250	300	g's	253.0	Pass
Oscillation	0	10	%	2.6	Pass
Lateral Acceleration	-15	15	g's	4.4	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
X Accelerometer	ENDEVCO 7264CT	AC-P58998	9/30/2019	3/30/2020
Y Accelerometer	ENDEVCO 7264CT	AC-P51722	10/1/2019	3/31/2020
Z Accelerometer	ENDEVCO 7264CT	AC-P58997	9/30/2019	3/30/2020

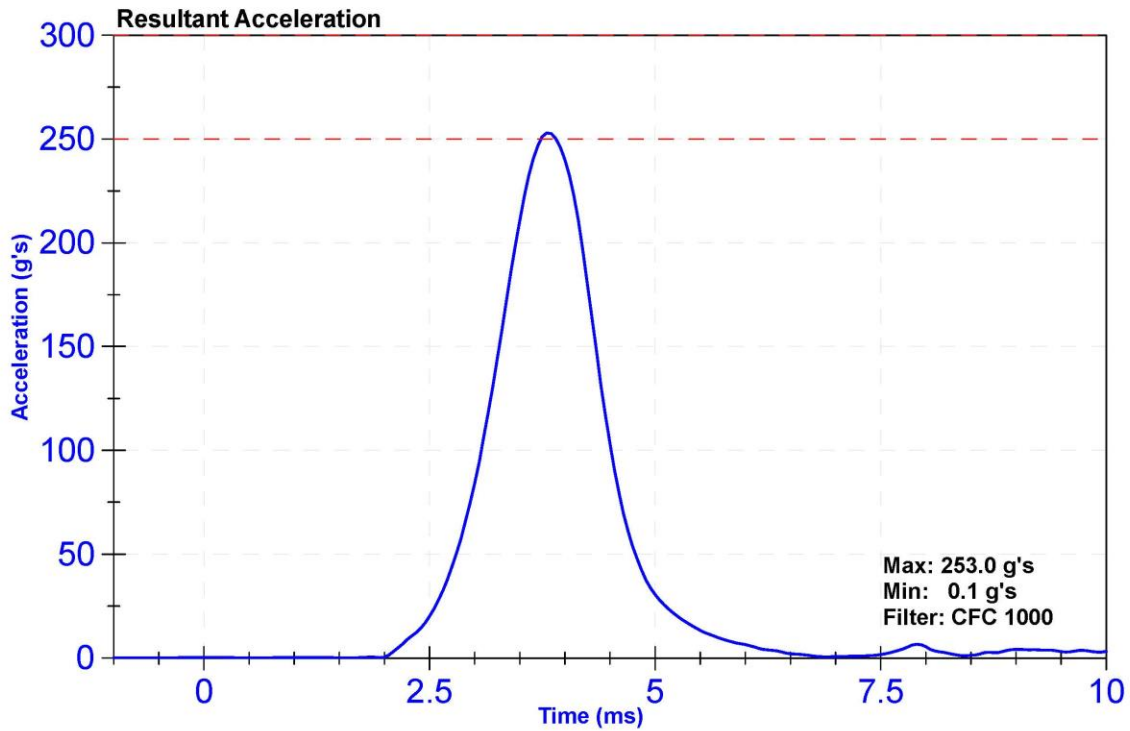

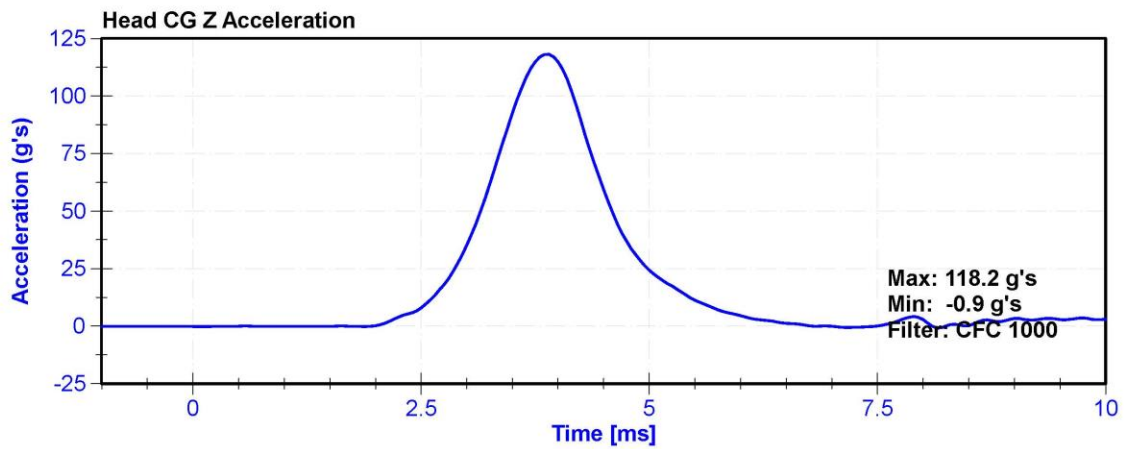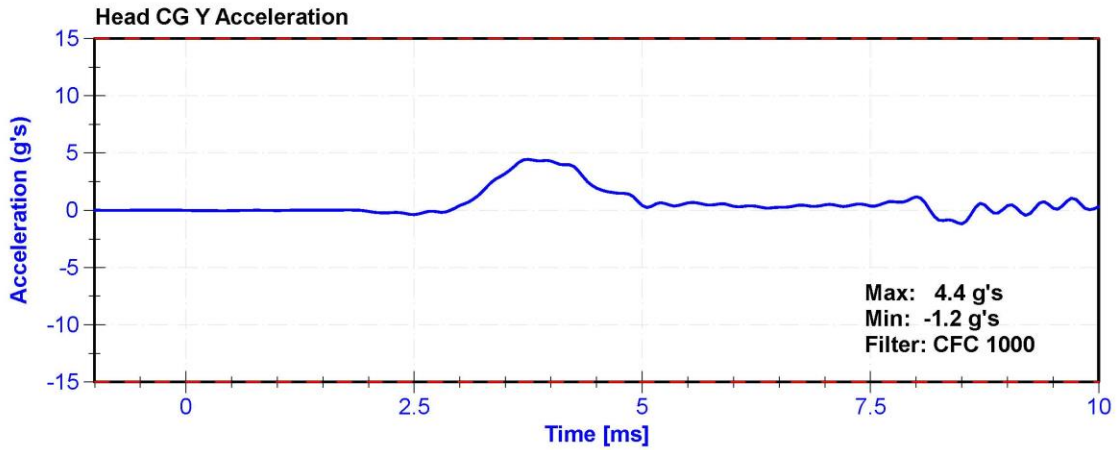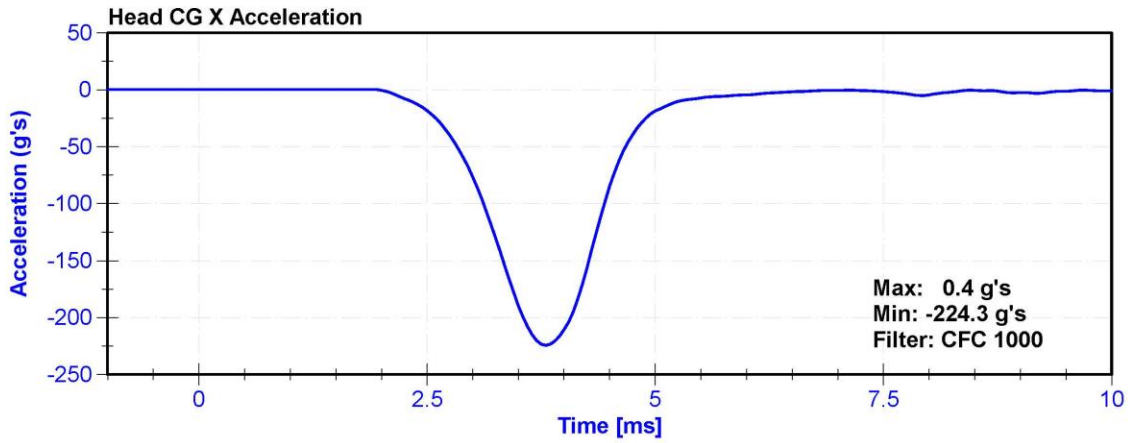


ATD Manufacturer	Humanetics	Test Technician	K. Dutton
ATD Serial Number	140	Laboratory Supervisor	K. Brogan



Results




Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21.3	Pass
Humidity	10	70	%	43.2	Pass
Velocity	6.89	7.13	m/s	7.070	Pass
Pendulum Impulse at 10ms	2.1	2.5	m/s	2.27	Pass
Pendulum Impulse at 20ms	4.0	5.0	m/s	4.59	Pass
Pendulum Impulse at 30ms	5.8	7.0	m/s	6.63	Pass
Max D Plane Rotation	77	91	deg	88.1	Pass
Max Moment During Rotation Interval	69	83	Nm	81.4	Pass
Moment Decay to 10.0 Nm	80	100	ms	90.3	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	ENDEVCO 7231CT	AC-AH5M9 Pend	1/29/2019	1/29/2020
Pendulum Potentiometer	ETI SP22G	DS-LABPOT1	11/15/2018	11/15/2019
Condyle Potentiometer	ETI SP22G	DS-LABPOT2	11/15/2018	11/15/2019
Upper Neck Load Cell	DENTON 1716A	LC-2206Fx	2/18/2019	2/18/2020

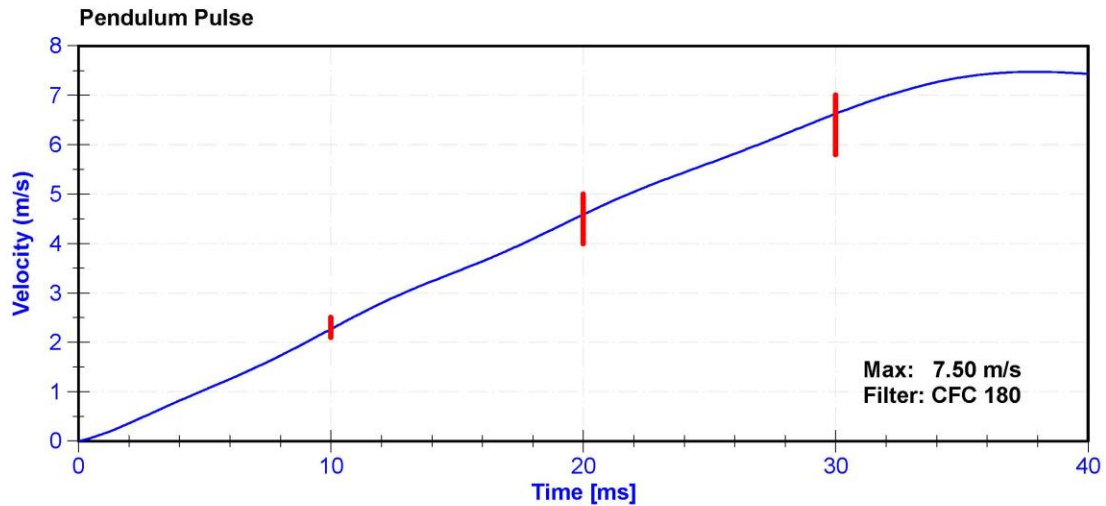

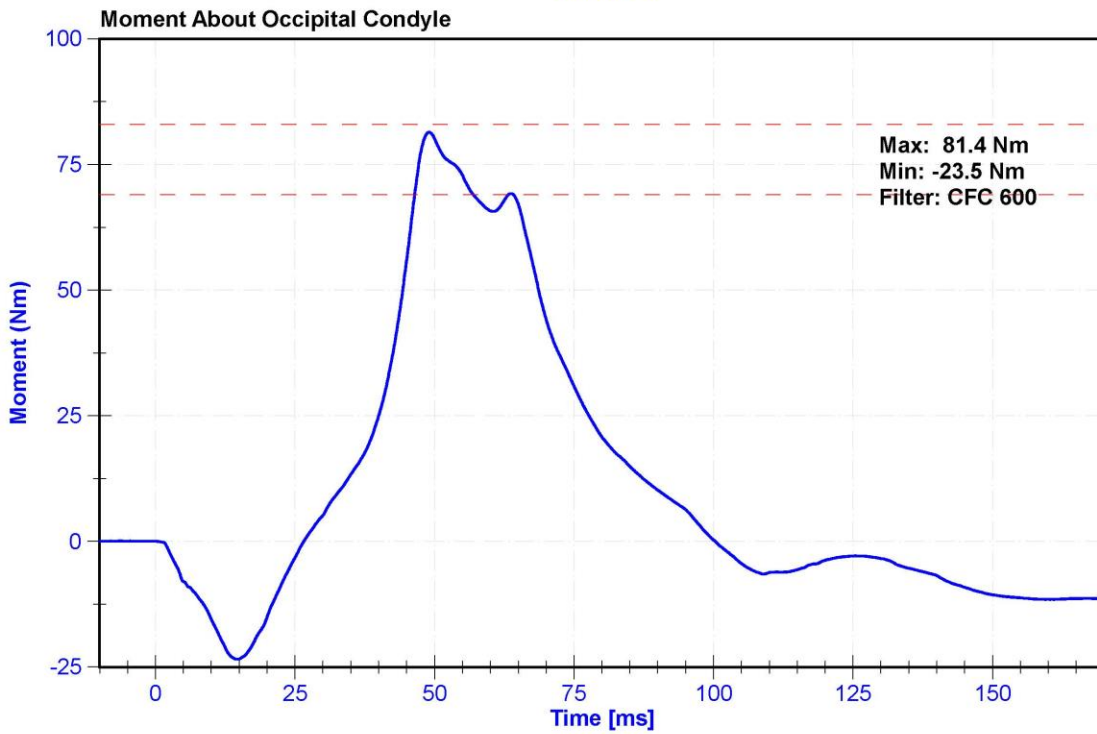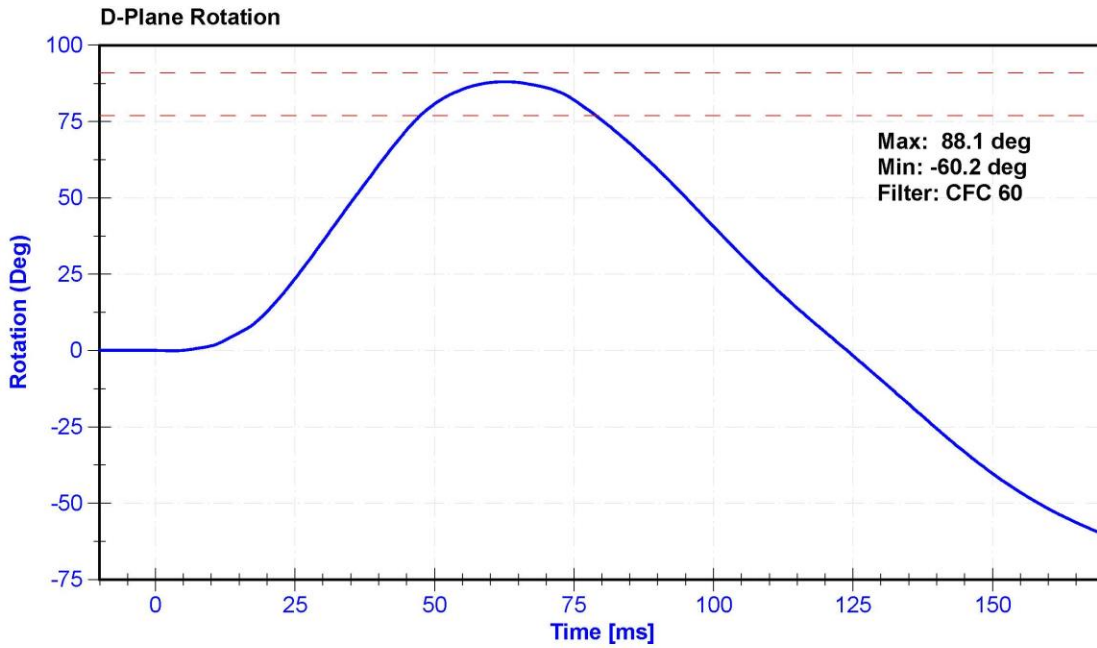

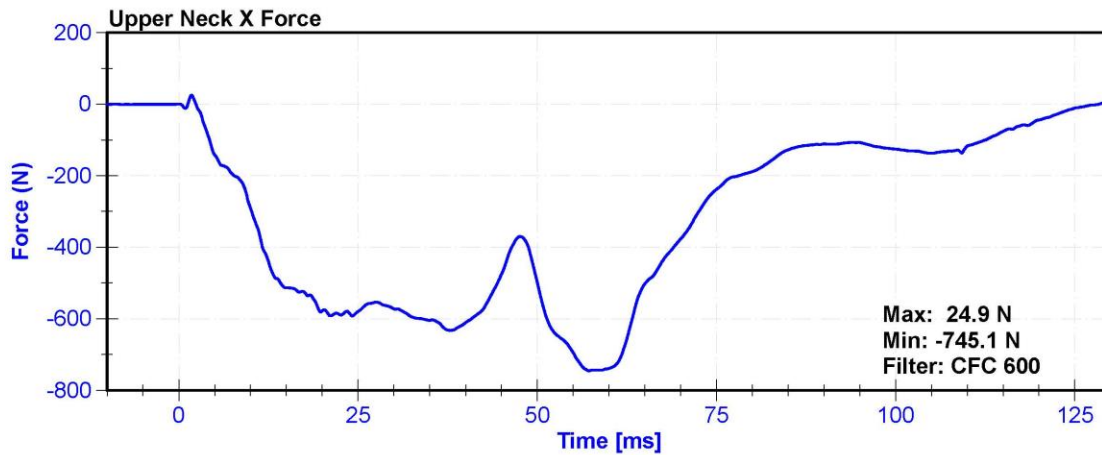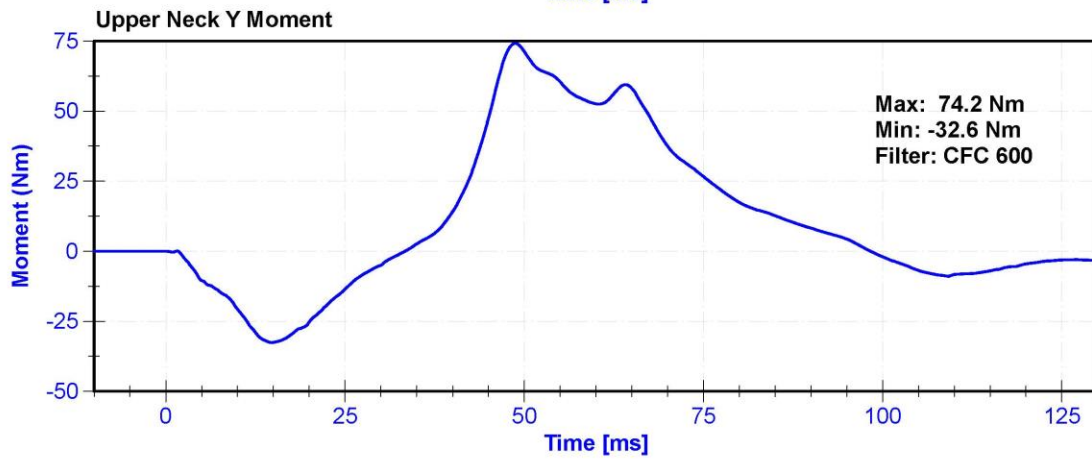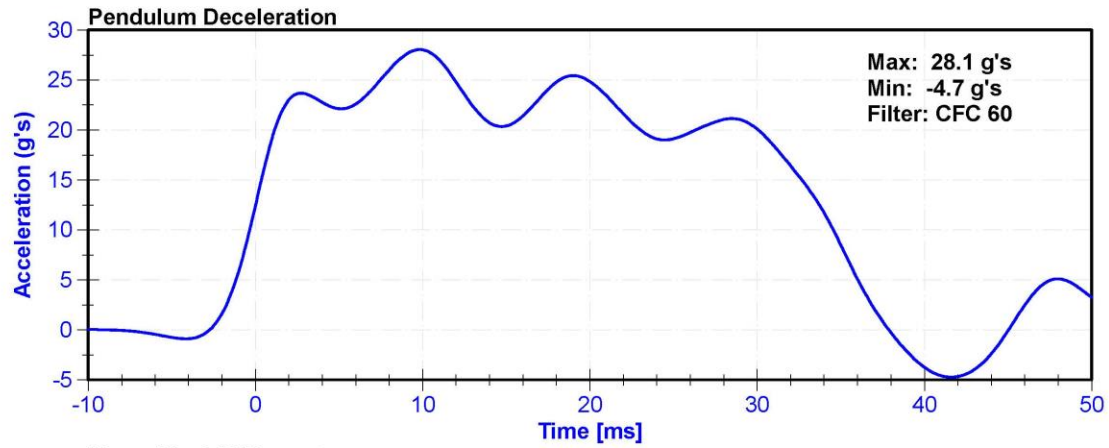


ATD Manufacturer	Humanetics	Test Technician	K. Dutton
ATD Serial Number	140	Laboratory Supervisor	K. Brogan



Results




Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21.3	Pass
Humidity	10	70	%	43.4	Pass
Velocity	5.95	6.19	m/s	6.088	Pass
Pendulum Impulse at 10ms	1.5	1.9	m/s	1.64	Pass
Pendulum Impulse at 20ms	3.1	3.9	m/s	3.37	Pass
Pendulum Impulse at 30ms	4.6	5.6	m/s	4.93	Pass
D Plane Rotation	99	114	deg	110.2	Pass
Moment During Rotation Interval	-65	-53	Nm	-58.7	Pass
Moment Decay to -10Nm	94	114	ms	107.1	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	ENDEVCO 7231CT	AC-AH5M9 Pend	1/29/2019	1/29/2020
Pendulum Potentiometer	ETI SP22G	DS-LABPOT1	11/15/2018	11/15/2019
Condyle Potentiometer	ETI SP22G	DS-LABPOT2	11/15/2018	11/15/2019
Upper Neck Load Cell	DENTON 1716A	LC-2206Fx	2/18/2019	2/18/2020

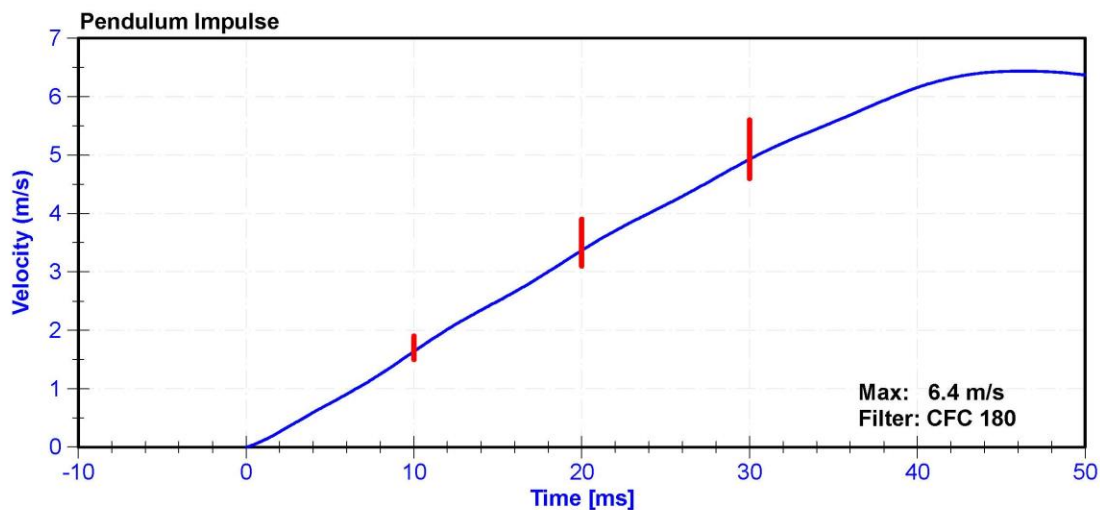

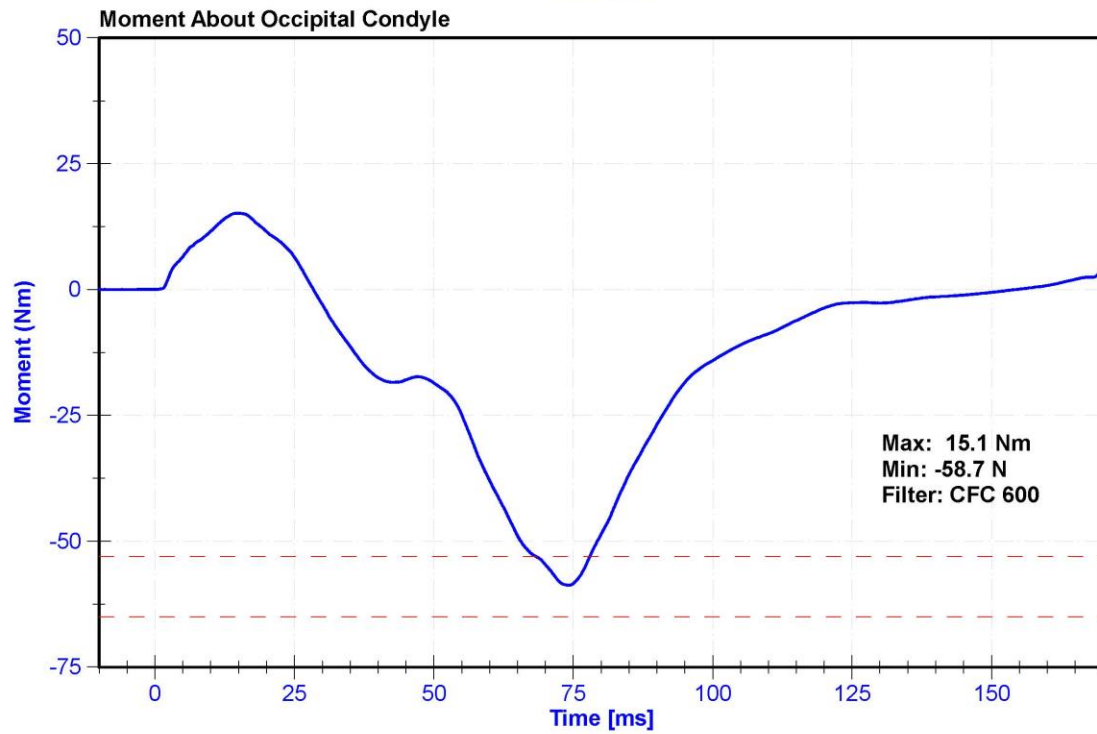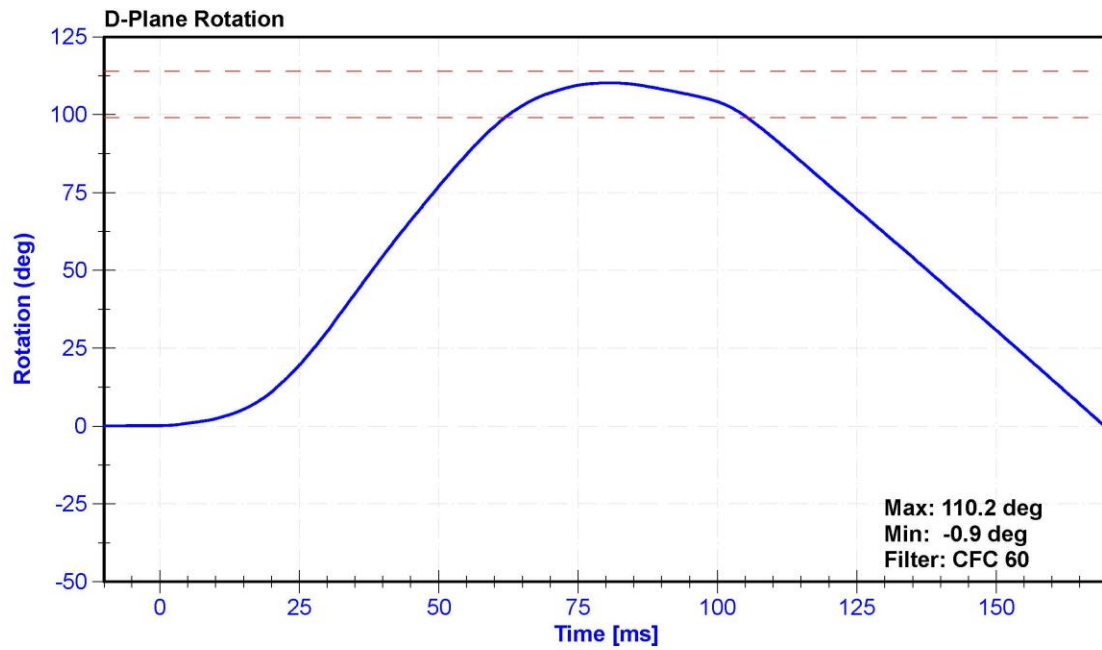

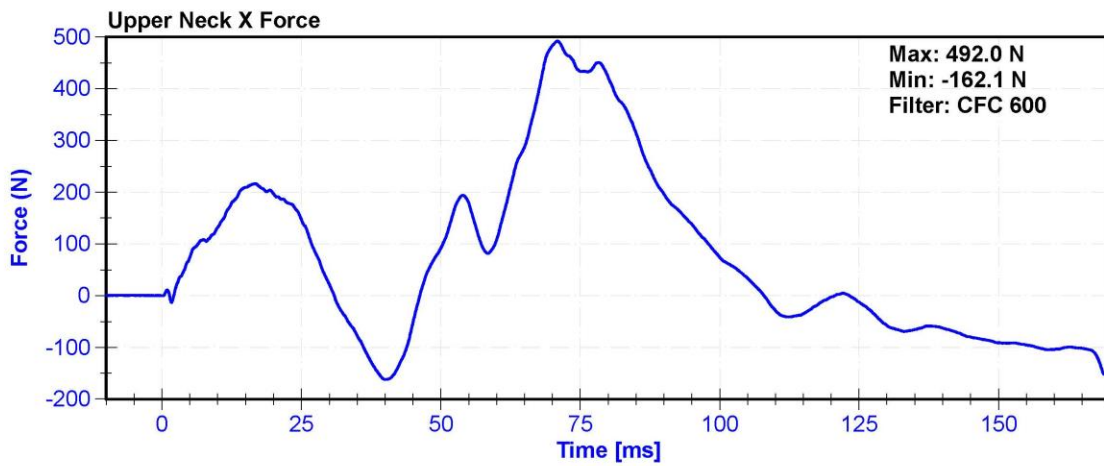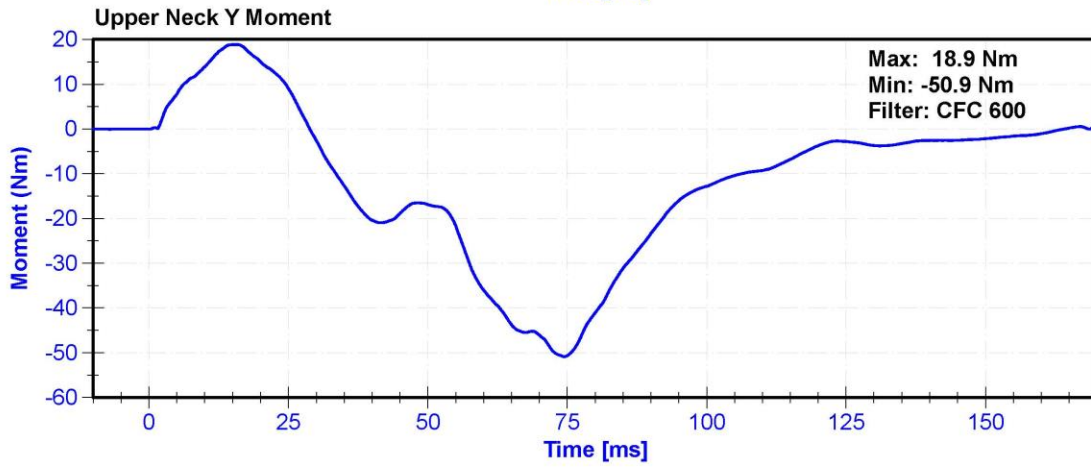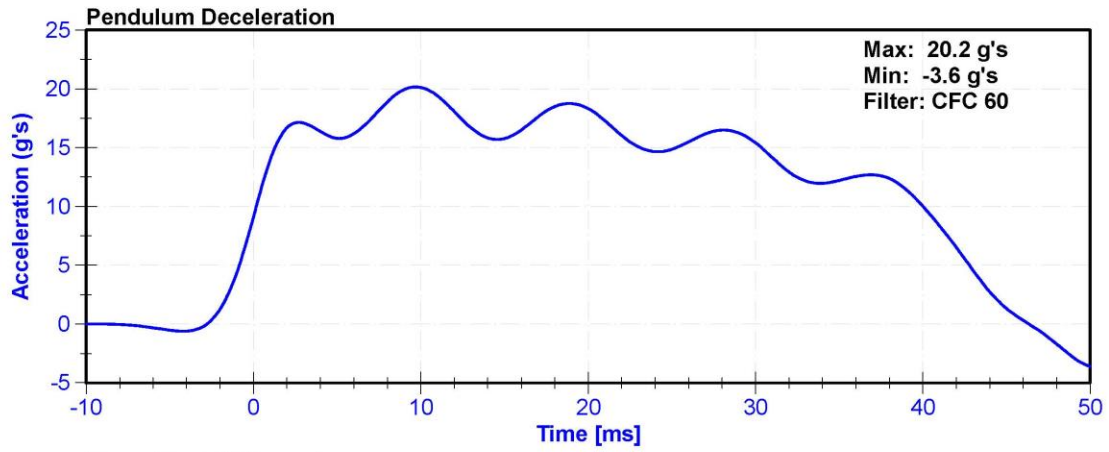


ATD Manufacturer	Humanetics	Test Technician	D. Reinhard
ATD Serial Number	140	Laboratory Supervisor	K. Brogan



Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21.3	Pass
Humidity	10	70	%	47.2	Pass
Velocity	6.59	6.83	m/s	6.655	Pass
Chest Deflection	-58	-50	mm	-51.0	Pass
Maximum Resistive Force (50 to 58mm)	3900	4400	N	4100.1	Pass
Maximum Resistive Force (18 to 50mm)	0	4600	N	4117.5	Pass
Hysteresis	69	85	%	75.2	Pass


Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	MSI 64C-2000	A260568	7/29/2019	1/27/2020
Chest Potentiometer	SERVO 14CBI-3615	DS-140GFE	6/21/2019	6/20/2020

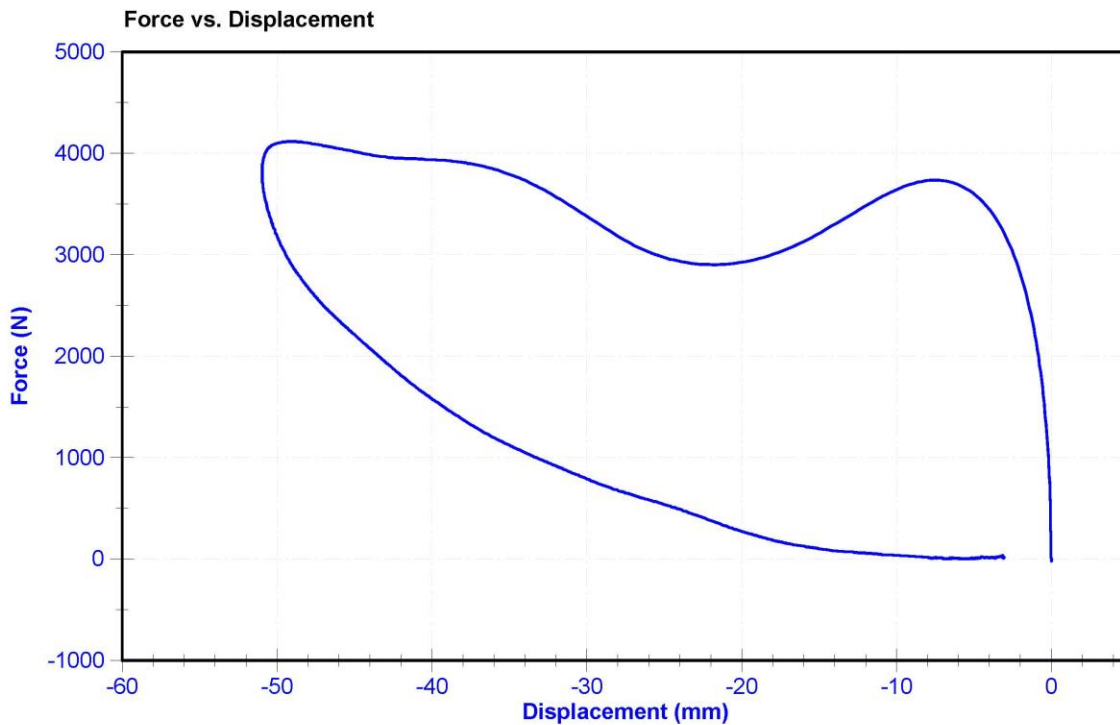


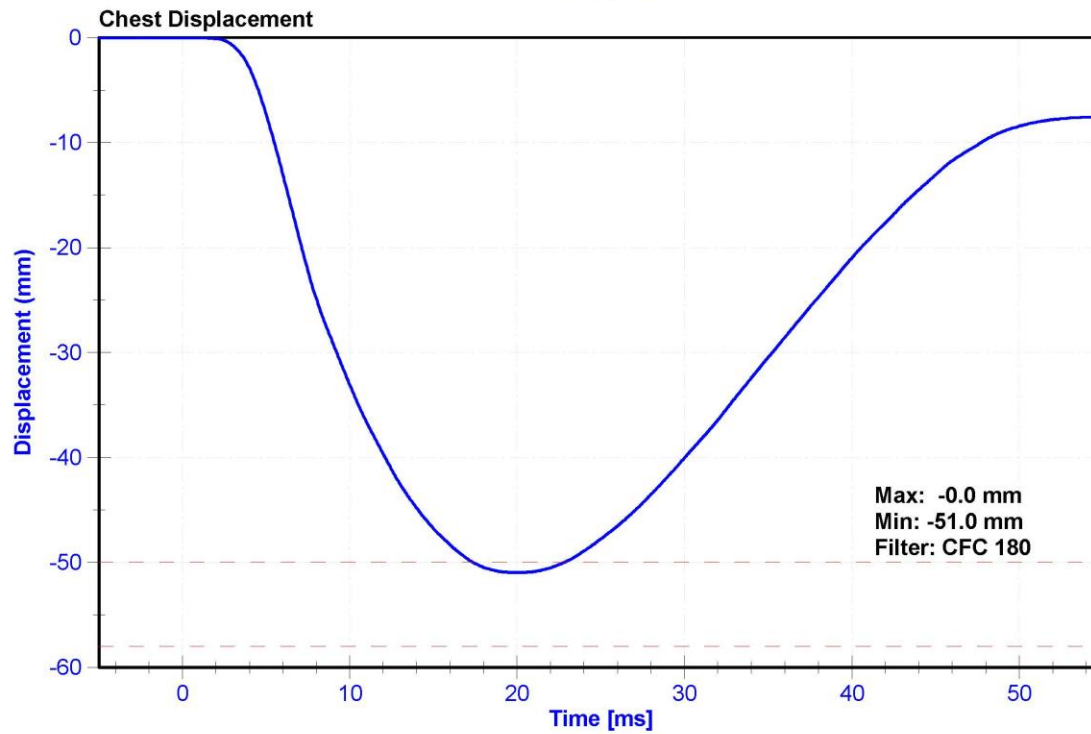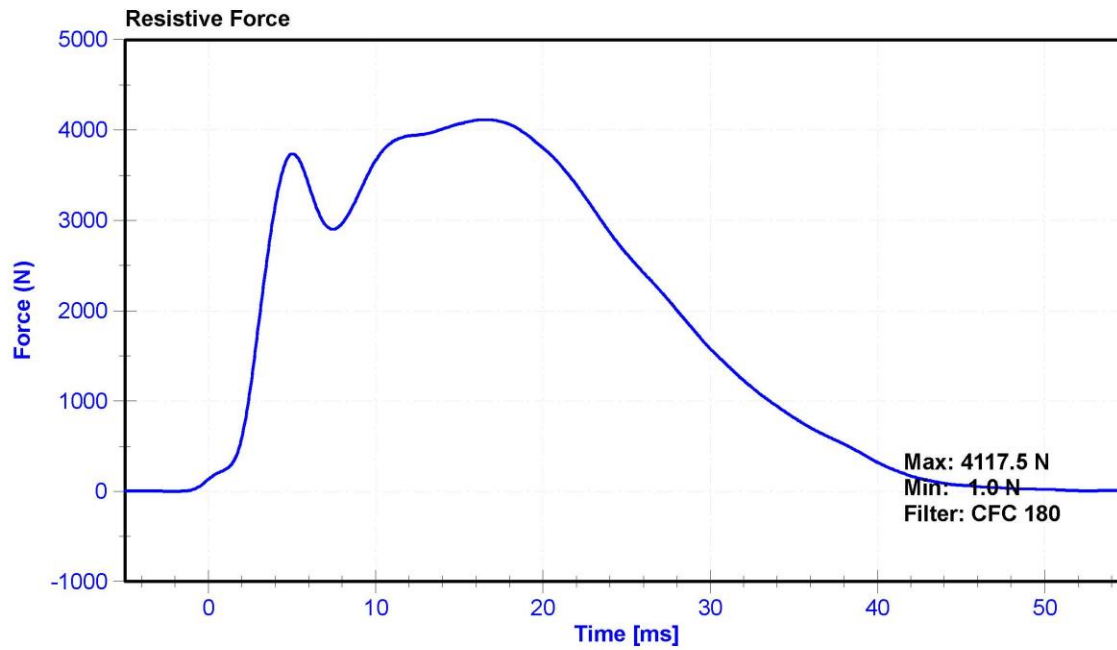

Probe Acceleration

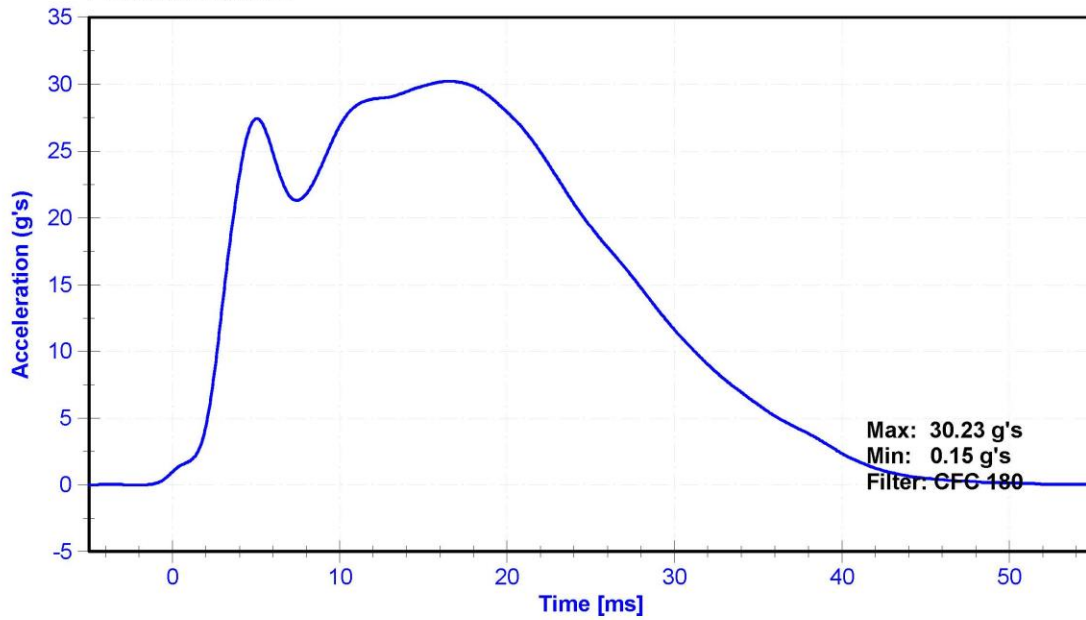

Change in Velocity (Integrated Acceleration)

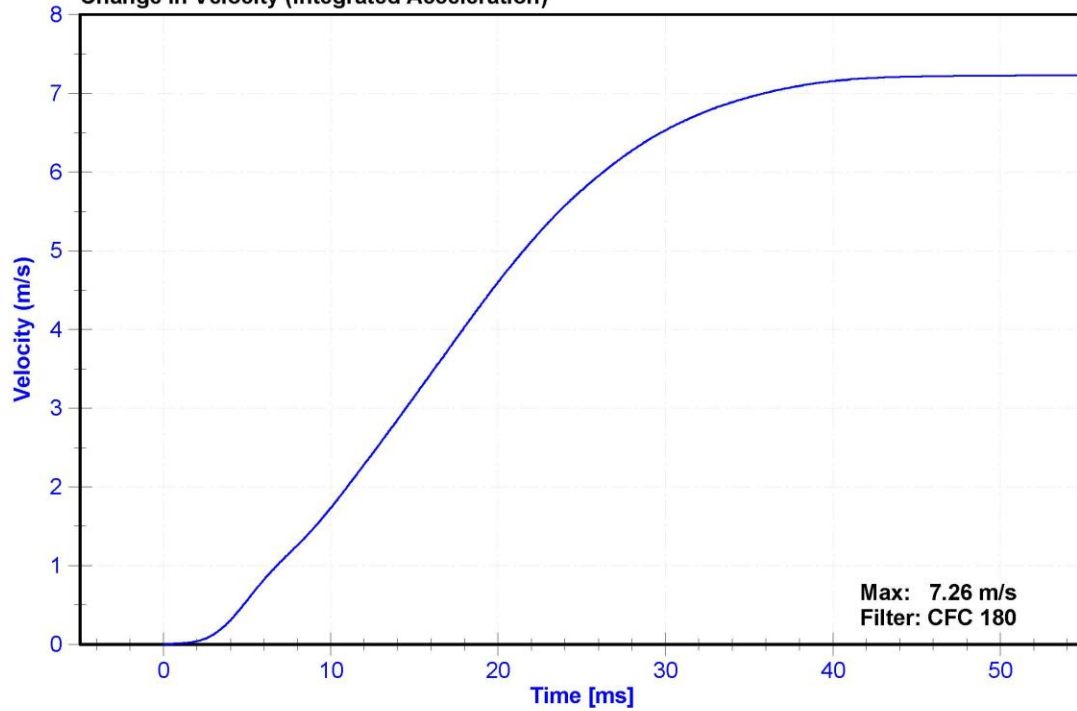

ATD Manufacturer	Humanetics	Test Technician	C. Mantell
ATD Serial Number	140	Laboratory Supervisor	K. Brogan


Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	18.6	25.6	°C	21.2	Pass
Humidity	10	70	%	48	Pass
Initial Angle	0	20	deg	17.9	Pass
Force at 45 Degrees	320	390	N	356.1	Pass
Return Angle Relative to Initial	0	8	deg	1.2	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Potentiometer	Rieker N4C-1	DS-13051548	11/25/2018	11/25/2019
Load Cell	Interface SML-200	LC-493319	11/25/2018	11/25/2019

Force vs. Displacement

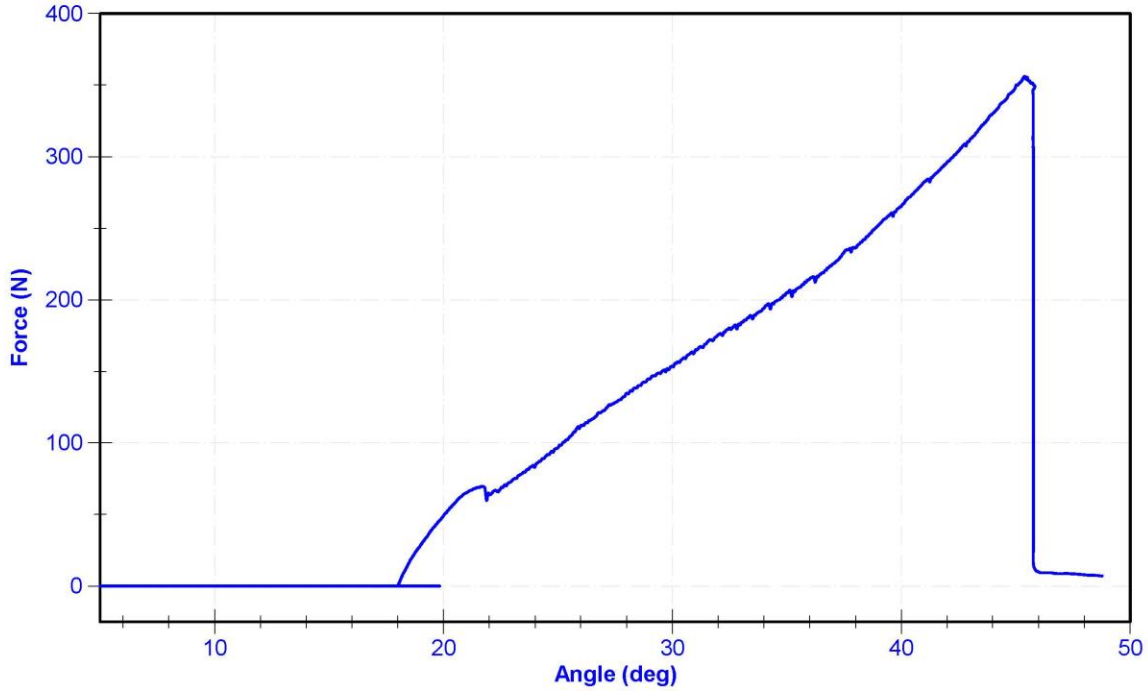


ATD Manufacturer	Humanetics	Test Technician	E. Helenbrook
ATD Serial Number	140	Laboratory Supervisor	K. Brogan



Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	18.9	25.6	°C	21.5	Pass
Humidity	10	70	%	40.1	Pass
Velocity	2.07	2.13	m/s	2.130	Pass
Resistive Force	3450	4060	N	3520.4	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	Measurement Specialties	A260568	7/29/2019	1/29/2020

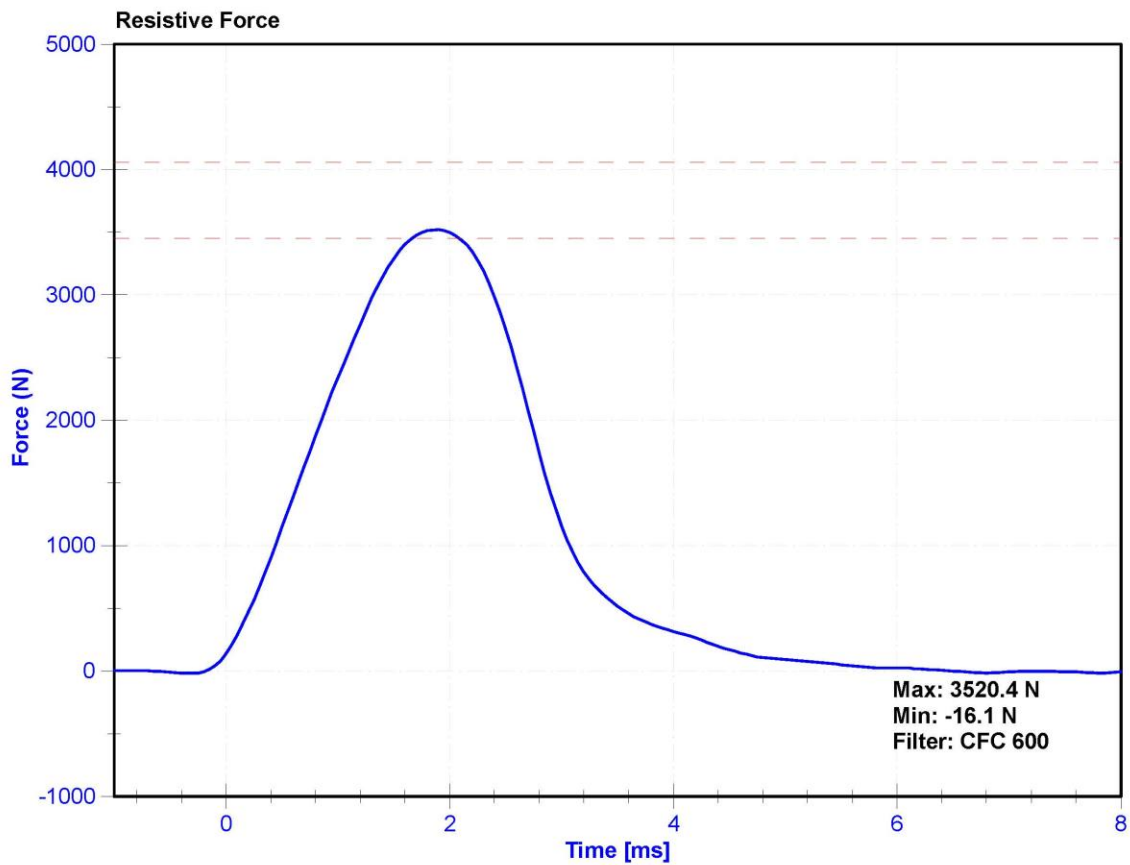

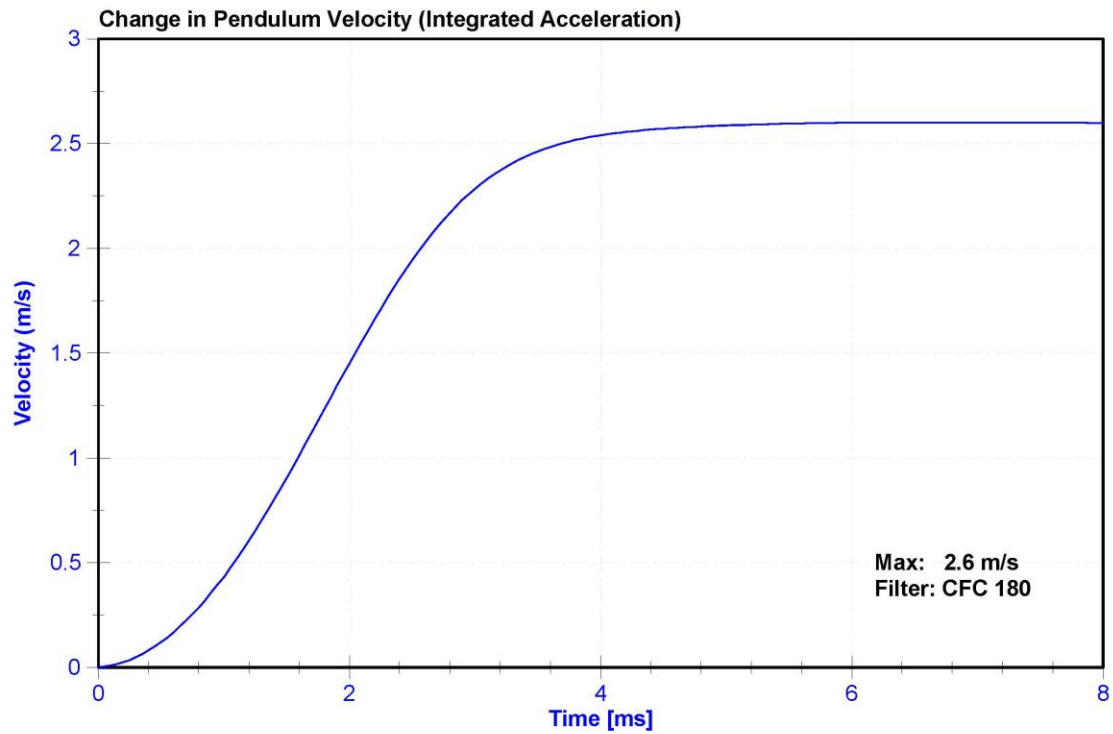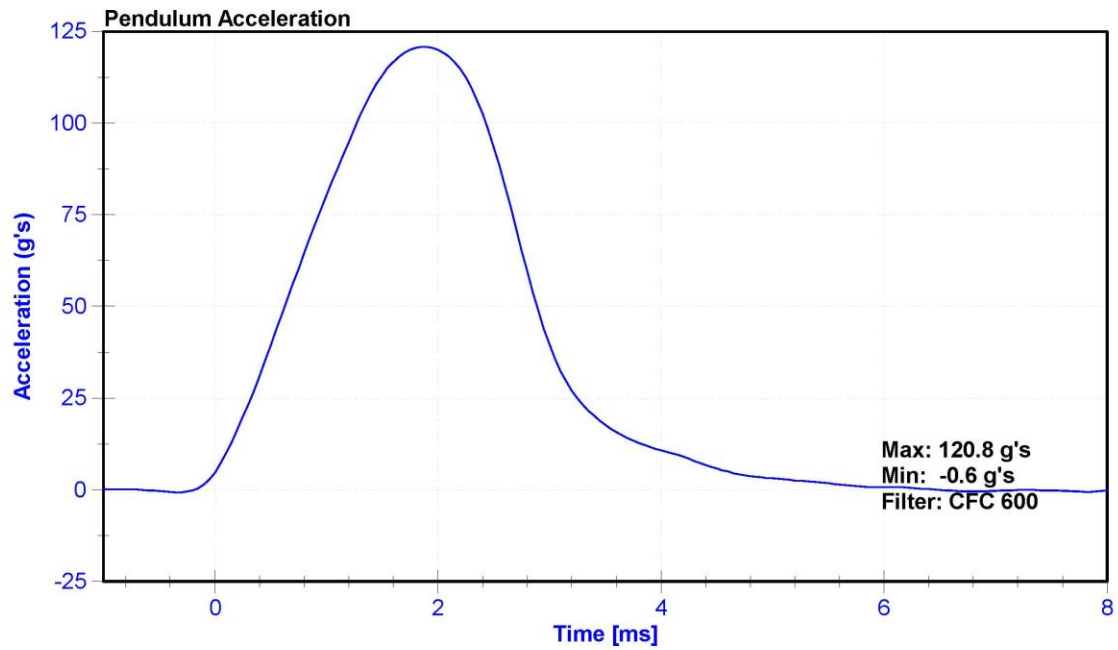


ATD Manufacturer	Humanetics	Test Technician	E. Helenbrook
ATD Serial Number	140	Laboratory Supervisor	K. Brogan



Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	18.9	25.6	°C	21.7	Pass
Humidity	10	70	%	40.0	Pass
Velocity	2.07	2.13	m/s	2.111	Pass
Resistive Force	3450	4060	N	3759.2	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	Measurement Specialties	A260568	7/29/2019	1/29/2020

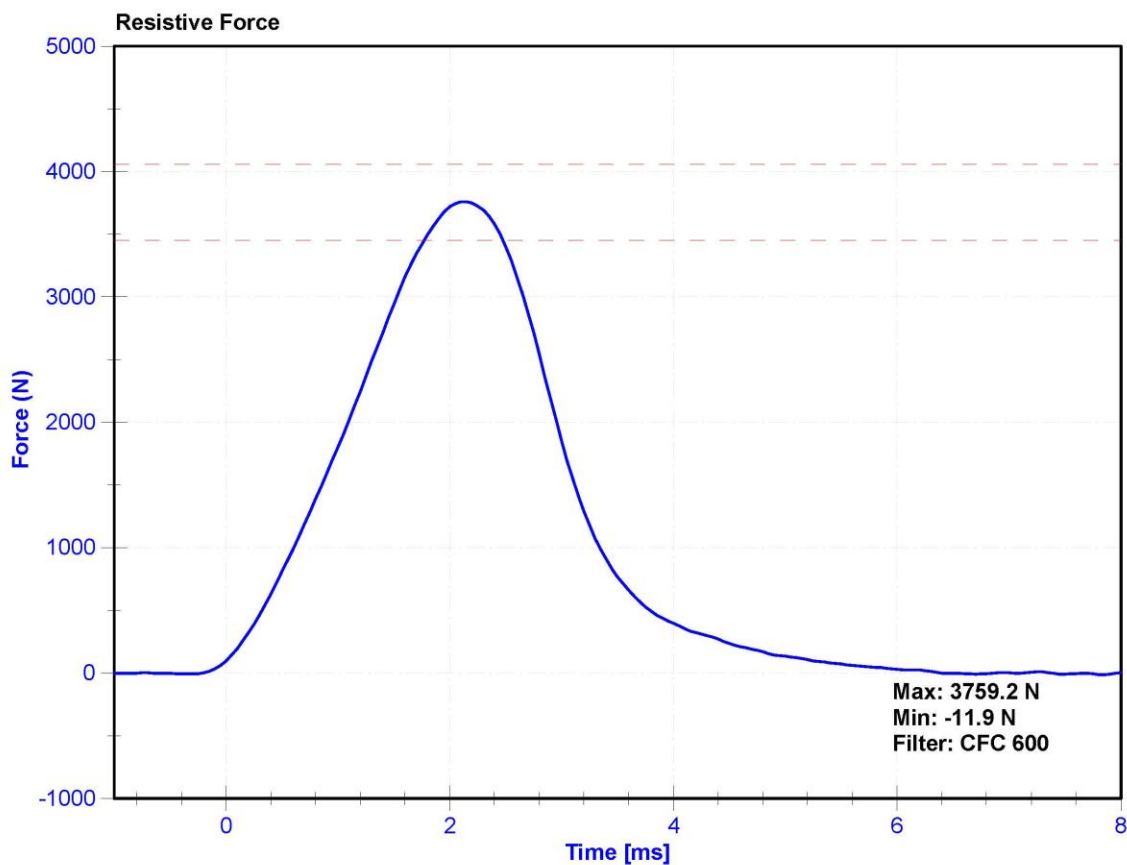

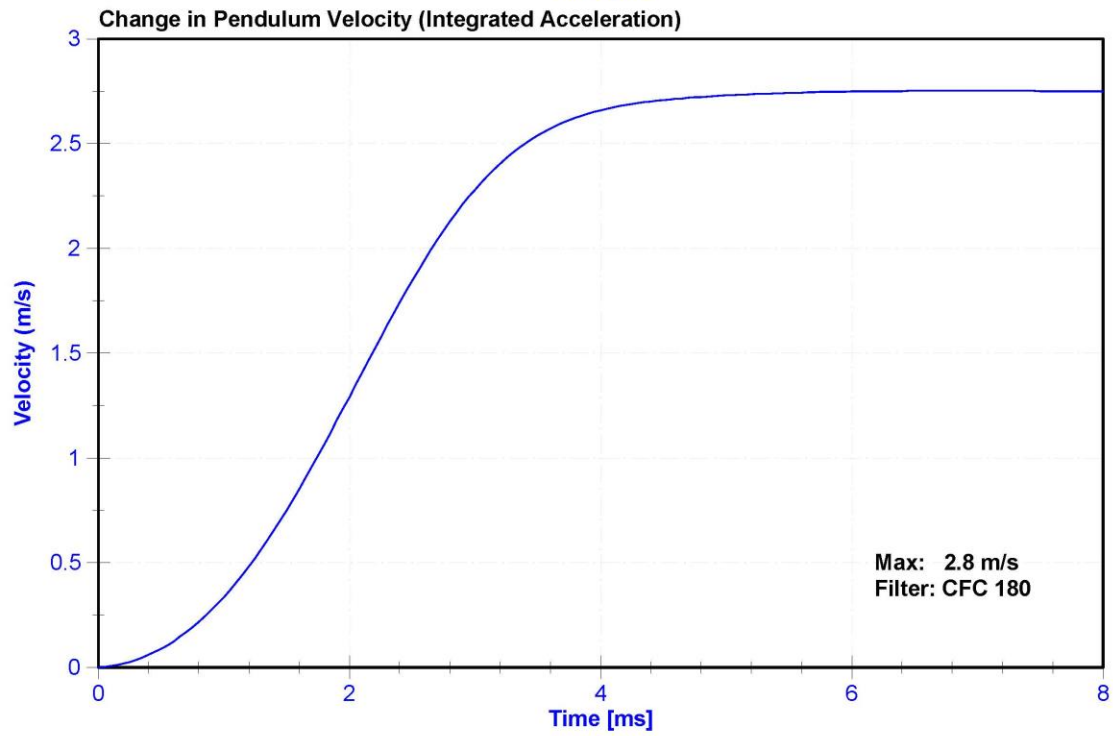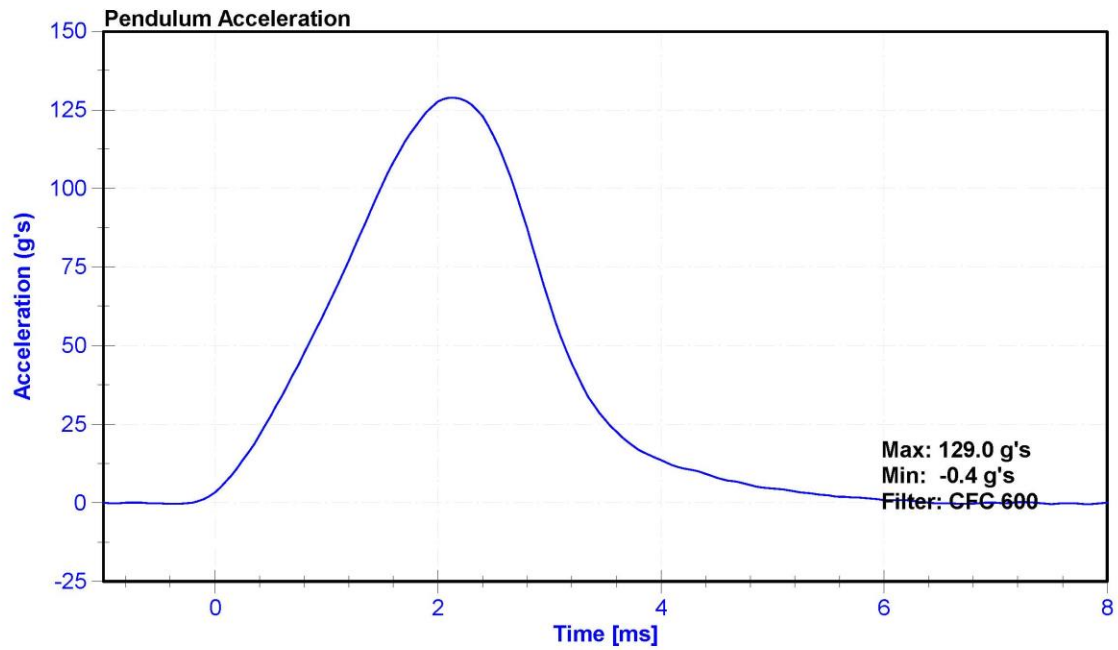

APPENDIX D

DUMMY CALIBRATION AND PERFORMANCE VERIFICATION DATA

Table 1 – Driver Dummy Instrumentation

Instrumentation		Axis/Location	Hybrid III 50 th S/N: 142		
			Serial Number	Manufacturer	Calibration Date
Head Accelerometers	Primary	X	P51681	ENDEVCO	8/13/2019
		Y	P64151	ENDEVCO	8/13/2019
		Z	P52114	ENDEVCO	8/13/2019
	Redundant	X	P58833	ENDEVCO	8/13/2019
		Y	P58905	ENDEVCO	8/13/2019
		Z	P63996	ENDEVCO	8/13/2019
Head Angular Rate Sensors		X	ARS-5941 GFE	DTS ARS	7/8/2019
		Y	ARS-6014 GFE	DTS ARS	7/8/2019
		Z	ARS-5990	DTS ARS	7/8/2019
Upper Neck Load Cell		FX, Fy, Fz MX,MY, MZ	17162019 FX	Denton	2/18/2019
Chest Accelerometers	Primary	X	AC-P51994	ENDEVCO	10/21/2019
		Y	AC-P51991	ENDEVCO	10/21/2019
		Z	AC-P49185	ENDEVCO	10/21/2019
	Redundant	X	AC-P51713	ENDEVCO	10/21/2019
		Y	AC-P68059	ENDEVCO	10/21/2019
		Z	AC-P78824	ENDEVCO	10/21/2019
Chest Potentiometer		X	DS-142	JDK	9/12/2019
Pelvis Accelerometer		X	AC-P58800	ENDEVCO	9/30/2019
		Y	AC-P52157	ENDEVCO	9/30/2019
		Z	AC-P52156	ENDEVCO	9/30/2019
Femur Load Cells - Left	Primary	Z	LC-115-1 Fz	Denton	10/3/2019
	Redundant	Z	LC-115-2 Fz	Denton	10/3/2019
Femur Load Cells - Right	Primary	Z	LC-DI4210FZ1	Denton	10/3/2019
	Redundant	Z	LC-DI4210FZ2	Denton	10/3/2019
Tibia Load Cells - Left	Upper	MX, MY, FZ	LC-404Fx	Denton	9/25/2019
	Lower	MX, MY, FZ	LC-396Fz	Denton	9/25/2019
Tibia Load Cells – Right	Upper	MX, MY, FZ	LC-651 Fz	Denton	2/18/2019
	Lower	MX, MY, FZ	LC-364Fz	Denton	9/25/2019
Foot Accelerometers - Left	Rear	X	AC-P50084	ENDEVCO	9/30/2019
	Front	Z	AC-P58779	ENDEVCO	9/30/2019
Foot Accelerometers - Right	Rear	X	AC-P51872	ENDEVCO	10/1/2019
	Front	Z	AC-P58893	ENDEVCO	9/30/2019
Seat belt Load Cells	Lap		LC-278	FTSS IF-964	10/26/2018
	Shoulder		LC-290	FTSS IF-964	10/26/2018

Table 2 – Front Passenger Dummy Instrumentation

Instrumentation		Axis/Location	Hybrid III 5 th S/N: 140		
			Serial Number	Manufacturer	Calibration Date
Head Accelerometers	Primary	X	AC-P58998	ENDEVCO	9/30/2019
		Y	AC-P51722	ENDEVCO	10/1/2019
		Z	AC-P58997	ENDEVCO	9/30/2019
	Redundant	X	AC-P58780	ENDEVCO	9/30/2019
		Y	AC-P58749	ENDEVCO	9/30/2019
		Z	AC-P58909	ENDEVCO	9/30/2019
Head Angular Rate Sensors		X	ARS-6986	DTS ARS	1/4/2019
		Y	ARS-9141	DTS ARS	12/14/2018
		Z	ARS-9080	DTS ARS	1/4/2019
Upper Neck Load Cell		FX, Fy, Fz MX,MY, MZ	LC-2206Fx	DENTON	2/18/2019
Chest Accelerometers	Primary	X	AC-P59019	ENDEVCO	9/30/2019
		Y	AC-P51965	ENDEVCO	9/30/2019
		Z	AC-P58981	ENDEVCO	9/30/2019
	Redundant	X	AC-P64000	ENDEVCO	9/30/2019
		Y	AC-P51970	ENDEVCO	9/30/2019
		Z	AC-P51689	ENDEVCO	9/30/2019
Chest Potentiometer		X	DS-140GFE	SERVO	6/21/2019
Pelvis Accelerometer		X	AC-P58912	ENDEVCO	10/21/2019
		Y	AC-P51220	ENDEVCO	10/21/2019
		Z	AC-P51989	ENDEVCO	10/21/2019
Femur Load Cells - Left	Primary	Z	LC-DI4213-1	DENTON	2/18/2019
	Redundant	Z	LC-DI4213-2	DENTON	2/18/2019
Femur Load Cells - Right	Primary	Z	LC-DH3271Fz1	DENTON	2/18/2019
	Redundant	Z	LC-DH3271Fz2	DENTON	2/18/2019
Tibia Load Cells - Left	Upper	MX, MY, FZ	3643-93 Fz	DENTON	10/3/2019
	Lower	MX, MY, FZ	LC-490Fz	DENTON	10/3/2019
Tibia Load Cells – Right	Upper	MX, MY, FZ	LC-91Fz	DENTON	10/3/2019
	Lower	MX, MY, FZ	LC-398Fz	DENTON	10/3/2019
Foot Accelerometers - Left	Rear	X	AC-P64005	ENDEVCO	10/21/2019
	Front	Z	AC-P64006	ENDEVCO	10/21/2019
Foot Accelerometers - Right	Rear	X	AC-P52018	ENDEVCO	10/21/2019
	Front	Z	AC-P78669	ENDEVCO	10/21/2019
Seat belt Load Cells	Lap		LC-DK1753	FTSS IF-964	5/4/2019
	Shoulder		LC-174	FTSS IF-964	5/4/2019

Table 3 – Vehicle Instrumentation

Instrumentation			Axis	Serial Number	Manufacturer	Calibration Date
Crossmember/Rear Seat Accelerometers	Left	Primary	X	AC-A247197	MSI 1201-1000	10/18/2019
			Z	A284358	MSI 1201-1000	7/10/2019
		Redundant	X	A284248	MSI 1201-1000	6/7/2019
	Right	Primary	X	AC-A217566	MSI 1201-1000	5/23/2019
			Z	AC-A280866	MSI 1201-1000	10/1/2019
		Redundant	X	AC-A254666	MSI 1201-1000	5/22/2019
Engine Accelerometers	Top		X	AC-A280353	MSI 1201-1000	9/7/2019
	Bottom		X	AC-A280941	MSI 1201-1000	8/20/2019