

**REPORT NUMBER: SINCAP-CAL-20-001**

**NEW CAR ASSESSMENT PROGRAM (NCAP)  
MOVING DEFORMABLE BARRIER SIDE IMPACT TEST**

**Mitsubishi Motors Corporation  
2020 Mitsubishi Eclipse Cross  
Four Door SUV**

**NHTSA No: M20205602**

**PREPARED BY:  
CALSPAN CORPORATION  
P.O. BOX 400  
BUFFALO, NEW YORK 14225**



**December 19, 2019**

**FINAL REPORT**

**PREPARED FOR:  
U.S. DEPARTMENT OF TRANSPORTATION  
NATIONAL HIGHWAY TRAFFIC SAFETY ADMINISTRATION  
OFFICE OF CRASHWORTHINESS STANDARDS  
MAIL CODE: NRM-110  
1200 NEW JERSEY AVE SE, ROOM W43-410  
WASHINGTON, D.C. 20590**

This final test report was prepared for the U.S. Department of Transportation, National Highway Traffic Administration, in response to Contract Number DTNH22-14-D-00352.

This publication is distributed by the U.S. Department of Transportation, National Highway Traffic Safety Administration, in the interest of information exchange. The opinions, findings and conclusions expressed in this publication are those of the author(s) and not necessarily those of the Department of Transportation or the National Highway Traffic Safety Administration. The United States Government assumes no liability for its contents or use thereof.

If trade or manufacturers' names or products are mentioned it is only because they are considered essential to the object of the publication and should not be construed as an endorsement. The United States Government does not endorse products or manufacturers.

Prepared by: Vanessa Hansen  
Vanessa Hansen, Operations Manager

Date: December 19, 2019

Approved by: Edward Dutton  
Edward Dutton, Director

Date: December 19, 2019

#### **FINAL REPORT ACCEPTANCE BY OCWS:**

\_\_\_\_\_  
Division Chief, New Car Assessment Program  
NHTSA, Office of Crashworthiness Standards

Date: \_\_\_\_\_

\_\_\_\_\_  
COTR, New Car Assessment Program  
NHTSA, Office of Crashworthiness Standards

Date: \_\_\_\_\_



## TECHNICAL REPORT DOCUMENTATION PAGE

<b>1. Report No.</b> SINCAP-CAL-20-001	<b>2. Government Accession No.</b>	<b>3. Recipient's Catalog No.</b>																																																			
<b>4. Title and Subtitle</b> Final Report of New Car Assessment Program Side Impact MDB Testing of a 2020 Mitsubishi Eclipse Cross SUV NHTSA No.: M20205602		<b>5. Report Date</b> December 19, 2019																																																			
		<b>6. Performing Organization Code</b> CAL																																																			
Vanessa Hansen, Operations Manager Edward Dutton, Director		<b>8. Performing Organization Report No.</b> CAL-DOT-2020-001																																																			
<b>9. Performing Organization Name and Address</b> Calspan Corporation Transportation Test Operations P.O. Box 400 Buffalo, New York 14225		<b>10. Work Unit No.</b>																																																			
		<b>11. Contract or Grant No.</b> DTNH22-14-D-00352																																																			
<b>12. Sponsoring Agency Name and Address</b> U.S. Department of Transportation National Highway Traffic Safety Administration Office of Crashworthiness Standards (NRM-110) 1200 New Jersey Ave., SE, Room W43-410 Washington, D.C. 20590		<b>13. Type of Report and Period Covered:</b> Final Test Report November 5, 2019 - December 19, 2019																																																			
		<b>14. Sponsoring Agency Code</b> NRM-110																																																			
<b>15. Supplementary Notes</b>																																																					
<b>16. Abstract</b> <p>A 55/28, (61.90kph / 38.5 mph), 90° Moving Deformable Barrier NCAP Side Impact Test was conducted on the subject 2020 Mitsubishi Eclipse Cross SUV in accordance with the specifications of the Office of Crashworthiness Standards Test Procedure for the generation of consumer information on vehicle side crash protection. This test was conducted at Calspan Corporation's Transportation Test Operations facility in Buffalo, New York on November 5, 2019.</p> <p>The impact velocity of the Moving Deformable Barrier (MDB) was 61.69 km/h, and the ambient temperature at the struck (driver's) side of the target vehicle at the time of impact was 21°C. The target vehicle's maximum post-test static crush was 200mm located at level 2 &amp; 3. The test vehicle's occupant performance data is as follows:</p> <table border="1" style="width: 100%; border-collapse: collapse; margin: 10px 0;"> <thead> <tr> <th rowspan="2" style="text-align: center;">Measurement Description</th> <th colspan="3" style="text-align: center;">Driver ATD (ES-2re)</th> </tr> <tr> <th style="text-align: center;">Units</th> <th style="text-align: center;">IARV</th> <th style="text-align: center;">Result</th> </tr> </thead> <tbody> <tr> <td>Head Injury Criteria (HIC<sub>36</sub>)</td> <td style="text-align: center;">N/A</td> <td style="text-align: center;">1000</td> <td style="text-align: center;">144.695</td> </tr> <tr> <td>Maximum Thoracic Rib Deflection</td> <td style="text-align: center;">mm</td> <td style="text-align: center;">44</td> <td style="text-align: center;">11.705</td> </tr> <tr> <td>Total Abdominal Force</td> <td style="text-align: center;">N</td> <td style="text-align: center;">2500</td> <td style="text-align: center;">683.979</td> </tr> <tr> <td>Pubic Symphysis Force</td> <td style="text-align: center;">N</td> <td style="text-align: center;">6000</td> <td style="text-align: center;">1298.925</td> </tr> </tbody> </table> <table border="1" style="width: 100%; border-collapse: collapse; margin: 10px 0;"> <thead> <tr> <th rowspan="2" style="text-align: center;">Measurement Description</th> <th colspan="3" style="text-align: center;">Passenger ATD (SID-IIs)</th> </tr> <tr> <th style="text-align: center;">Units</th> <th style="text-align: center;">IARV</th> <th style="text-align: center;">Result</th> </tr> </thead> <tbody> <tr> <td>Head Injury Criteria (HIC<sub>36</sub>)</td> <td style="text-align: center;">N/A</td> <td style="text-align: center;">1000</td> <td style="text-align: center;">162.101</td> </tr> <tr> <td>Lower Spine Resultant Acceleration</td> <td style="text-align: center;">G</td> <td style="text-align: center;">82</td> <td style="text-align: center;">55.374</td> </tr> <tr> <td>Total Pelvic Force (sum of acetabular and iliac forces)</td> <td style="text-align: center;">N</td> <td style="text-align: center;">5525</td> <td style="text-align: center;">2064.259</td> </tr> <tr> <td>Maximum Thoracic Rib Deflection</td> <td style="text-align: center;">mm</td> <td style="text-align: center;">38*</td> <td style="text-align: center;">15.973</td> </tr> <tr> <td>Maximum Abdominal Rib Deflection</td> <td style="text-align: center;">mm</td> <td style="text-align: center;">45*</td> <td style="text-align: center;">38.148</td> </tr> </tbody> </table> <p><small>* Proposed IARV</small></p> <p>The two doors on the struck side of the vehicle did not separate from the body at the hinges or latches and the opposite doors did not open during the side impact event.</p>				Measurement Description	Driver ATD (ES-2re)			Units	IARV	Result	Head Injury Criteria (HIC <sub>36</sub> )	N/A	1000	144.695	Maximum Thoracic Rib Deflection	mm	44	11.705	Total Abdominal Force	N	2500	683.979	Pubic Symphysis Force	N	6000	1298.925	Measurement Description	Passenger ATD (SID-IIs)			Units	IARV	Result	Head Injury Criteria (HIC <sub>36</sub> )	N/A	1000	162.101	Lower Spine Resultant Acceleration	G	82	55.374	Total Pelvic Force (sum of acetabular and iliac forces)	N	5525	2064.259	Maximum Thoracic Rib Deflection	mm	38*	15.973	Maximum Abdominal Rib Deflection	mm	45*	38.148
Measurement Description	Driver ATD (ES-2re)																																																				
	Units	IARV	Result																																																		
Head Injury Criteria (HIC <sub>36</sub> )	N/A	1000	144.695																																																		
Maximum Thoracic Rib Deflection	mm	44	11.705																																																		
Total Abdominal Force	N	2500	683.979																																																		
Pubic Symphysis Force	N	6000	1298.925																																																		
Measurement Description	Passenger ATD (SID-IIs)																																																				
	Units	IARV	Result																																																		
Head Injury Criteria (HIC <sub>36</sub> )	N/A	1000	162.101																																																		
Lower Spine Resultant Acceleration	G	82	55.374																																																		
Total Pelvic Force (sum of acetabular and iliac forces)	N	5525	2064.259																																																		
Maximum Thoracic Rib Deflection	mm	38*	15.973																																																		
Maximum Abdominal Rib Deflection	mm	45*	38.148																																																		
<b>17. Key Words</b> New Car Assessment Program (NCAP) Side Impact MDB ES-2re SID-IIs		<b>18. Distribution Statement</b> <u>Copies of this report are available from:</u> National Highway Traffic Safety Administration Technical Information Services Division, NPO-411 1200 New Jersey Ave. SE Washington, D.C. 20590																																																			
<b>19. Security Class. (of this report)</b>  UNCLASSIFIED	<b>20. Security Class. (of this page)</b>  UNCLASSIFIED	<b>21. No. of Pages</b>  192	<b>22. Price</b>																																																		

## TABLE OF CONTENTS

<u>Section</u>		<u>Page</u>
1	Test Purpose and Procedure	1-1
2	Summary of Test Results	2-1
3	Occupant and Vehicle Information	3-1
<u>Data Sheet</u>		<u>Page</u>
1	General Test and Vehicle Parameter Data	3-2
2	Seat, Seat Belt, Steering Wheel Adjustment and Fuel System Data	3-6
3	Dummy Longitudinal Clearance Dimensions	3-10
4	Dummy Lateral Clearance Dimensions	3-11
5	Camera and Instrumentation Data	3-12
6	Test Vehicle Accelerometer Locations	3-13
7	MDB Accelerometer Locations	3-14
8	Post-Test Observations	3-15
9	MDB Summary of Results	3-17
10	Test Vehicle Profile Measurements	3-18
11	Test Vehicle Exterior Crush Measurements	3-19
12	MDB Exterior Static Crush Measurements	3-22
13	Vehicle and MDB Damage Profile Distances	3-23
14	FMVSS No. 301 Static Rollover Results	3-24
15	Dummy/Vehicle Temperature and Humidity Stabilization Data	3-25
<u>Appendix</u>		<u>Page</u>
A	Photographs	A-1
B	Vehicle and Dummy Response Data Plots	B-1
C	Dummy Configuration and Performance Verification Data	C-1
D	Test Equipment and Instrumentation Calibration Data	D-1

## **SECTION 1**

### **TEST PURPOSE AND PROCEDURE**

This moving deformable barrier side impact test is part of the MY 2020 New Car Assessment Program Side Impact Test Program, sponsored by the National Highway Traffic Safety Administration (NHTSA), under contract number DTNH22-14-D-00352. The purpose of this test is to generate comparative side impact performance in a 2020 Mitsubishi Eclipse Cross SUV. The side impact test was conducted in accordance with the Office of Crashworthiness Standard's Laboratory Test Procedure dated October 2015.

## **SECTION 2**

### **SUMMARY OF TEST RESULTS**

A 2020 Mitsubishi Eclipse Cross SUV was impacted on the left (driver's) side by a Moving Deformable Barrier (MDB) which was moving forward in a 27° crabbed position to the tow road guidance system at a velocity of 61.69 km/h. The target vehicle was stationary and was positioned at an angle of 63° to the line of forward motion. The side impact test was conducted by the Calspan Corporation's Transportation Test Operations Center in Buffalo, New York on November 5, 2019. Pre-test and post-test photographs of the test vehicle, the MDB and the dummies (ES-2re and SID-IIs) are included in this report.

Dummies were placed in the driver and left rear designated seating positions according to instructions specified in the OCWS Side Impact Laboratory Test Procedure, dated October 2015. The side impact event was documented by 9 high-speed and 2 real-time cameras. Camera locations are included in this report.

The Dummies were instrumented in the following manner:

#### **DRIVER ATD (ES-2re)**

Primary and redundant head CG tri-axial accelerometers

Chest upper rib, middle rib, and lower rib y-axis displacement potentiometers

Abdomen forward, middle, and rear y-axis load cells

Lower spine (T12) tri-axial accelerometers

Public symphysis y-axis load cell

#### **PASSENGER ATD (SID-IIs)**

Primary and redundant head CG tri-axial accelerometers

Chest upper rib, middle rib, and lower rib y-axis displacement potentiometers

Abdomen upper rib and lower rib y-axis displacement potentiometers

Lower spine (T12) tri-axial accelerometers

Acetabulum and iliac wing y-axis load cells

Appendix B contains the vehicle and dummy response data. Dummy configuration and performance verification data can be found in APPENDIX C of this report. Appendix D of this report contains the test equipment and instrumentation calibration data.

## DUMMY INJURY VALUES

Measurement Description	Driver ATD (ES-2re)		
	Units	Threshold	Result
Head Injury Criteria (HIC36)		1000	144.695
Maximum Thorax Rib Deflection	mm	44	11.705
Combined Abdominal Force	N	2500	683.979
Pubic Symphysis Force	N	6000	1298.925

Measurement Description	Passenger ATD (SID-IIs)		
	Units	Threshold	Result
Head Injury Criteria (HIC36)		1000	162.101
Lower Spine (T12) Resultant Acceleration	G	82	55.374
Total Pelvic Force (sum of acetabular and iliac forces)	N	5525	2064.259
Maximum Thoracic Rib Deflection	mm	38*	15.973
Maximum Abdominal Rib Deflection	mm	45*	38.148

\*Proposed IARV

## SUPPLEMENTAL RESTRAINT INFORMATION

Restraint Type	Left Front (Driver) Occupant Location 1		Left Rear (Passenger) Occupant Location 4	
	Mounted	Deployed	Mounted	Deployed
Frontal Air bag	Yes	No		
Knee Air bag	Yes	No		
Side Air bag 1 - Curtain	Yes	Yes	Yes	Yes
Side Air bag 2 – Torso/Pelvis Air bag	Yes	Yes	No	N/A
Seat Belt Pretensioner	Yes	Yes	No	N/A
Seat Belt Load Limiter	Yes	Yes	No	N/A
Other				

### GENERAL COMMENTS:

1. P1 serial number – F034
2. P4 serial number – 300

### Data Anomalies:

The following channel was questionable for

- Left B-Pillar Lower Y Acceleration, Exceeded calibration range at 12 ms
- Left Rear Sill Y Acceleration, Exceeded calibration range at 41.1 ms

**SECTION 3**  
**OCCUPANT AND VEHICLE INFORMATION**

This section contains information reporting for the following Data Sheets:

Data Sheet No. 1 - General Test and Vehicle Parameter Data

Data Sheet No. 2 – Seat, Seat Belt, Steering Wheel Adjustment and Fuel System Data

Data Sheet No. 3 – Dummy Longitudinal Clearance Dimensions

Data Sheet No. 4 – Dummy Lateral Clearance Dimensions

Data Sheet No. 5 – Camera and Instrumentation Data

Data Sheet No. 6 – Test Vehicle Accelerometer Locations

Data Sheet No. 7 – MDB Accelerometer Locations

Data Sheet No. 8 – Post-Test Observations

Data Sheet No. 9 – MDB Summary of Results

Data Sheet No. 10 – Test Vehicle Profile Measurements

Data Sheet No. 11 – Test Vehicle Exterior Crush Measurements

Data Sheet No. 12 – MDB Exterior Static Crush Measurements

Data Sheet No. 13 – Vehicle and MDB Damage Profile Distances

Data Sheet No. 14 – FMVSS No. 301 Static Rollover Results

Data Sheet No. 15 – Dummy/Vehicle Temperature and Humidity Stabilization Data

**DATA SHEET NO. 1**  
**GENERAL TEST AND VEHICLE PARAMETER DATA**

Test Vehicle: 2020 Mitsubishi Eclipse Cross SUV  
 Test Program: NCAP Side MDB Impact Test

NHTSA No.: M20205602  
 Test Date: 11/5/2019

**TEST VEHICLE INFORMATION AND OPTIONS**

NHTSA No.	M20205602	Traction Control System (TCS)	Yes
Model Year	2020	Auto-Leveling System	No
Make	Mitsubishi	Automatic Door Locks (ADL)	Yes
Model	Eclipse Cross	Power Window Auto-Reverse	No
Body Style	SUV	Other Optional Feature	-
VIN	JA4AS3AA7LZ005567	Driver Front Air bag	Yes
Body Color	Brown	Driver Curtain Air bag	Yes
Odometer Reading (km/mi)	127 miles	Driver Head/Torso Air bag	No
Engine Displacement (L)	1.5	Driver Torso Air bag	No
Type/No. Cylinders	I4	Driver Torso/Pelvis Air bag	Yes
Engine Placement	Transverse	Driver Pelvis Air bag	No
Transmission Type	Automatic	Driver Knee Air bag	Yes
Transmission Speeds	CVT	Rear Pass. Curtain Air bag	Yes
Overdrive	Yes	Rear Pass. Head/Torso Air bag	No
Final Drive	Front Wheel Drive	Rear Pass. Torso Air bag	No
Roof Rack	No	Rear Pass. Torso/Pelvis Air bag	No
Sunroof/T-Top	No	Rear Pass. Pelvis Air bag	No
Running Boards	No	Driver Seat Belt Pretensioners	Yes
Tilt Steering Wheel	Yes	Rear Pass. Seat Belt Pretensioners	No
Power Seats	No	Driver Load Limiter	Yes
Anti-Lock Brakes (ABS)	Yes	Rear Pass. Load Limiter	No
		Other Safety Restraint	-

Does owner's manual provide instructions to turn off automatic door locks? No

**DATA FROM CERTIFICATION LABEL**

Manufactured By	Mitsubishi Motors Corporation	GVWR (kg)	2100
Date of Manufacture	JUL 2019	GAWR Front (kg)	1200
Vehicle Type	MPV	GAWR Rear (kg)	1160

**VEHICLE SEATING AND WEIGHT CAPACITY DATA**

Measured Parameter	Front	Rear	Third	Total	
Designated Seating Capacity (DSC)	2	3	-	5	
Capacity Weight (VCW) (kg)				375	(A)
DSC X 68.04 kg				340.2	(B)
Cargo Weight (RCLW) (kg)				34.8	(A-B)

**VEHICLE SEAT TYPE**

Seating Location	Type of Seat Pan				Type of Seat Back		
	Bucket	Bench	Split Bench	Contoured	Fixed	Adjustable	
						W/ Lever	W/ Knob
Front Seat	X					X	
Rear or Second Row Seat			X			X	
Third Row seat							


**DATA SHEET NO. 1 ... (CONTINUED)**  
**GENERAL TEST AND VEHICLE PARAMETER DATA**

Test Vehicle: 2020 Mitsubishi Eclipse Cross SUV  
 Test Program: NCAP Side MDB Impact Test

NHTSA No.: M20205602  
 Test Date: 11/5/2019

**VEHICLE TIRE INFORMATION**

*Collected for year, make, model, & VIN, all items circled in red, tire manufacturer and tire name.*

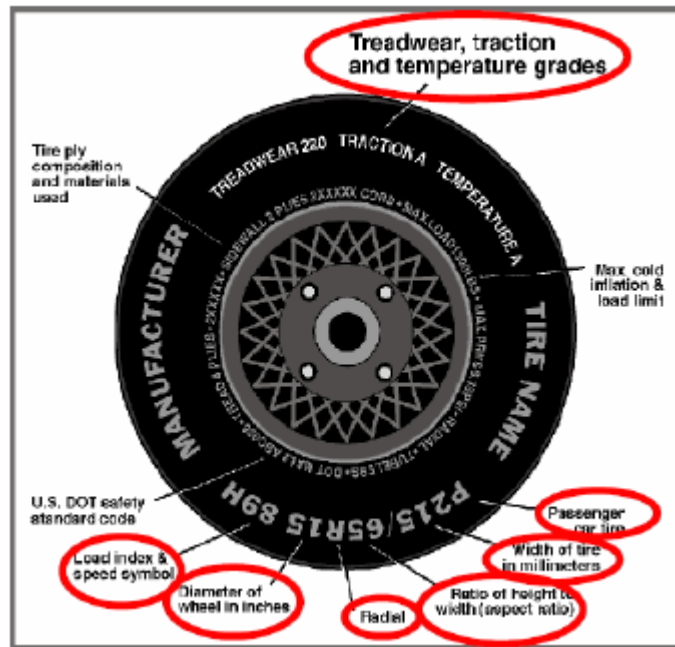

**TIRE SIDEWALL INFORMATION**

Measured Parameter	Front	Rear
Maximum Tire Pressure (kPa)	350	350
Cold Pressure (kPa)	240	240
Recommended Tire Size	P215/70R16	P215/70R16
Tire Size on Vehicle	P215/70R16	P215/70R16
Tire Manufacturer	Falken	Falken
Tire Model	Sincera N250	Sincera N250
Treadwear	320	320
Traction	B	B
Temperature Grade	A	A
Tire Plies Sidewall	2 Polyester	2 Polyester
Tire Plies Body	2 Polyester, 2 Steel, 1 Polyamide	2 Polyester, 2 Steel, 1 Polyamide
Load Index/Speed Symbol	99H	99H
Tire Material	Rubber	Rubber
DOT Safety Code Left	EUYV3MHR2319	EUYV3MHR2319
DOT Safety Code Right	EUYV3MHR2319	EUYV3MHR2319



**DATA SHEET NO. 1 ... (CONTINUED)**  
**GENERAL TEST AND VEHICLE PARAMETER DATA**

Test Vehicle: 2020 Mitsubishi Eclipse Cross SUV  
 Test Program: NCAP Side MDB Impact Test

NHTSA No.: M20205602  
 Test Date: 11/5/2019

**TIRE PRESSURES**

	Units	LF	RF	LR	RR
As Delivered	kPa	245	243	237	241
Tire Placard	kPa	240	240	240	240
Owner's Manual	kPa	240	240	240	240
As Tested	kPa	240	240	240	240

**MDB TIRE SPECIFICATIONS**

	Units	Requirement	LF	RF	LR	RR
Tire Size		P205/75R15	P205/75R15	P205/75R15	P205/75R15	P205/75R15
Tire Pressure	kPa	200 ± 21	207	207	207	207

**TEST VEHICLE WEIGHTS**

	Units	As Delivered (UVW)			As Tested (ATW)			Fully Loaded		
		Front	Rear	Total	Front	Rear	Total	Front	Rear	Total
Left	kg	445	310		489	365		491	379	
Right	kg	434	293		451	332		443	336	
Ratio	%	59.3	40.7		57	42		56.6	43.4	
Totals	kg	879	603	1482	940	697	1637	934	715	1649

**TARGET TEST WEIGHT CALCULATION**

Measured Parameter	Units	Value	
Total Delivered Weight (UVW)	kg	1482	(A)
Sum of Actual Weight of 1 ES2re and 1 P572 ATD (SID-IIs)	kg	127	(B)
Rated Cargo / Luggage Weight (RCLW)	kg	34.8	(C)
Calculated Target Vehicle Test Weight (TVTW)	kg	1643.8	(A+B+C)

**Does the measured As Test Vehicle Weight lie within the required weight range**

**(i.e. Calculated Test Vehicle Target Weight – 4.5 kg to – 9 kg)?** ☒ Yes ☐ No

**TEST VEHICLE ATTITUDES AND CG**

Measurement Description	Units	Fully Loaded	As Tested	Meets Requirement**
LF	mm	839	839	Yes
RF	mm	849	844	Yes
RR	mm	849	846	Yes
LR	mm	836	837	Yes
Vehicle CG (Aft of Front Axle)	mm	1136	1140	
Vehicle CG (Left+)/Right(-) from Longitudinal Centerline)	mm	43	34	

\*\*\* The "As Tested" vehicle attitude measurements must be equal to or within ± 10mm of the "Fully Loaded" vehicle attitude measurements at each wheel well. Indicate "Yes" or "No" for "Meets Requirements".

Test height adjustable suspension setting, if applicable: N/A

**DATA SHEET NO. 1 ... (CONTINUED)**  
**GENERAL TEST AND VEHICLE PARAMETER DATA**

Test Vehicle:	<u>2020 Mitsubishi Eclipse Cross SUV</u>	NHTSA No.:	<u>M20205602</u>
Test Program:	<u>NCAP Side MDB Impact Test</u>	Test Date:	<u>11/5/2019</u>

**WEIGHT OF BALLAST AND VEHICLE COMPONENTS REMOVED TO MEET TVTW**

Component Description	Weight (kg)
Trunk Carpeting	8
Spare Tire	14
Jack	3
Rear Bumper & Fascia	12
Tail lights	4
Ballast / Equipment Added	4

**DATA SHEET NO. 2**  
**SEAT, SEAT BELT, STEERING WHEEL ADJUSTMENT AND FUEL SYSTEM DATA**

Test Vehicle: <u>2020 Mitsubishi Eclipse Cross SUV</u>	NHTSA No.: <u>M20205602</u>	
Test Program: <u>NCAP Side MDB Impact Test</u>	Test Date: <u>11/5/2019</u>	

**SEAT POSITIONING**

*The driver's seat, front center seat (if applicable), and right front passenger's seat should be set to the mid-track, lowest, mid-angle position. The struck-side rear passenger's seat, rear center seat, and non-struck side rear passengers' seats should be set to the rear-most, lowest, mid-angle position.*

**SCRL ANGLE RANGE**

Seat	SCRL (°)		
	Max	Min	Mid
Driver Seat	12.8	9.4	11.1
Front Passenger Seat	Not Adjustable		
Front Center Seat*			
Struck Side Rear Seat	Fixed	Fixed	Fixed
Non-Struck Side Rear Seat	Fixed	Fixed	Fixed
Rear Center Seat*	Fixed	Fixed	Fixed

*\*if applicable*

**SEAT HEIGHT AND ANGLE**

Seat	As Tested SCRL Angle (Mid) (°)	As Tested SCRП Height (mm)	SCRП Height Position	SCRП Height (mm)		
				Rearmost	Mid- Fore/Aft	Forward- Most
Driver Seat	11.1	20	Max	-	-	-
			Mid	15	20	25
			Min	-	-	-
Front Passenger Seat	Not Adjustable		Max	-	-	-
			Mid	-	-	-
			Min	-	-	-
Front Center Seat*	N/A	N/A	Max	-	-	-
			Mid	-	-	-
			Min	-	-	-
Struck Side Rear Seat	Fixed	Fixed	Max	-	-	-
			Mid	-	-	-
			Min	-	-	-
Non-Struck Side Rear Seat	Fixed	Fixed	Max	-	-	-
			Mid	-	-	-
			Min	-	-	-
Rear Center Seat*	Fixed	Fixed	Max	-	-	-
			Mid	-	-	-
			Min	-	-	-

*\*if applicable*

**DATA SHEET NO. 2 ... (CONTINUED)**  
**SEAT, SEAT BELT, STEERING WHEEL ADJUSTMENT AND FUEL SYSTEM DATA**

Test Vehicle: 2020 Mitsubishi Eclipse Cross SUV  
 Test Program: NCAP Side MDB Impact Test

NHTSA No.: M20205602  
 Test Date: 11/5/2019


**SEAT FORE / AFT POSITION**

Seat	Total Fore / Aft Travel		Test Position from Forwardmost Position	
	mm	Detents*	mm	Detent*
Driver Seat	220	23 (0-22)	110	11
Front Passenger Seat	220	23 (0-22)	110	11
Front Center Seat*	N/A	N/A	N/A	N/A
Struck Side Rear Seat	200	21 (0-20)	200	20
Non-Struck Side Rear Seat	200	21 (0-20)	200	20
Rear Center Seat*	200	21 (0-20)	200	20

*\*if applicable*

**SEAT BACK ANGLE ADJUSTMENT**

*The driver's seat back is positioned to the manufacturer's designated design angle. The front center and front passenger's seat backs are positioned in a similar manner as the driver's seat back. The struck side rear seat back is positioned such that the dummy's head is level. The rear center and non-struck side rear outboard seat backs are positioned in a similar manner as the struck-side rear seat back.*

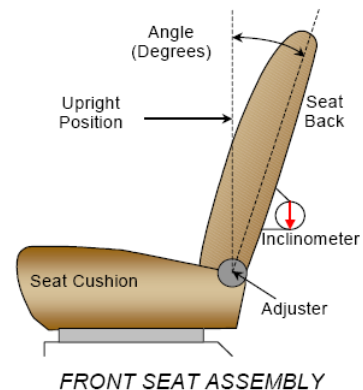

Seat	Total Seat Back Angle Range		Test Position from Most Upright	
	Degrees	Detents*	Degrees	Detents*
Driver Seat w/ Seated Dummy	71.8	N/A	1.3	6
Front Passenger Seat	64.1	N/A	1.7	6
Front Center Seat*	N/A	N/A	N/A	N/A
Struck Side Rear Seat w/ Seated Dummy	16.5	9	9.8	0
Non-Struck Side Rear Seat	16.5	9	9.8	0
Rear Center Seat*	16.5	9	9.8	0

*\*if applicable*

**DATA SHEET NO. 2 ... (CONTINUED)**  
**SEAT, SEAT BELT, STEERING WHEEL ADJUSTMENT AND FUEL SYSTEM DATA**

Test Vehicle: 2020 Mitsubishi Eclipse Cross SUV  
 Test Program: NCAP Side MDB Impact Test

NHTSA No.: M20205602  
 Test Date: 11/5/2019

**SEAT BELT ANCHORAGE ADJUSTMENT**

*Seat belt anchorages are adjusted in accordance with the information provided by the manufacturer on Form No. 1. For this test zero is defined as the uppermost position.*

	Total # of Positions	Placed in Position #
Driver Seat	4	0
Rear Seat	4	0

**HEAD RESTRAINT ADJUSTMENT**


*The driver's head restraint is adjusted to the highest and most full forward in-use position. The struck-side rear passenger's head restraint is adjusted to the lowest and most full forward in-use position.*

	Total # of Positions	Placed in Position #
Driver Seat	4	Uppermost
Rear Seat	2	1 from Lowest

**STEERING COLUMN ADJUSTMENT**

*Steering wheel and column adjustments are made so that the steering wheel hub is at the center of its geometric locus it describes when it moves through its full range of motion.*


	Degrees	Fore/Aft Position (mm)
Lowermost – Position 1	25.5	
Geometric Center – Position 2	27.7	
Uppermost – Position 3	29.8	
Telescoping Steering Wheel Travel		40
Test Position	27.8	20

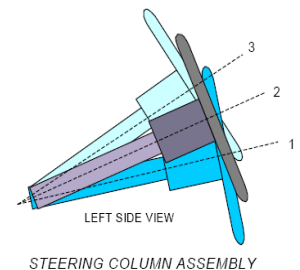

**FUEL PUMP**

*Describe the fuel pump type, details about how it operates, and the location of the fuel filler neck.*

The vehicle is equipped with an electric fuel pump. The fuel filler neck is on the left side of the vehicle. The pump creates positive pressure in the fuel lines, pushing the gasoline to the engine. See form 1 for more information.

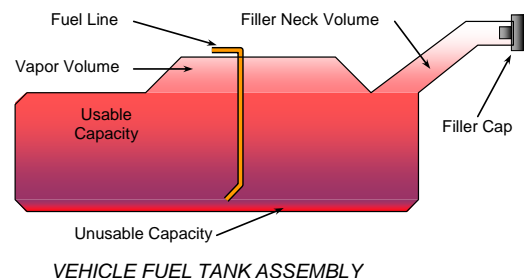

**DATA SHEET NO. 2 ... (CONTINUED)**  
**SEAT, SEAT BELT, STEERING WHEEL ADJUSTMENT AND FUEL SYSTEM DATA**

Test Vehicle:	<u>2020 Mitsubishi Eclipse Cross SUV</u>	NHTSA No.:	<u>M20205602</u>
Test Program:	<u>NCAP Side MDB Impact Test</u>	Test Date:	<u>11/5/2019</u>

**FUEL TANK CAPACITY**


	Liters
Usable Capacity of "Standard Tank" (see Form No. 1)	63
Usable Capacity of "Optional Tank" (see Form No. 1)	N/A
Usable Capacity of Standard Tank (see Owner's Manual)	63
Usable Capacity of Optional Tank (see Owner's Manual)	N/A
93% of Usable Capacity	58.6
Actual Amount of Solvent Used in Test	58.6
1/3 of Usable Capacity	21

Is the Actual Amount of Solvent Used in the test equal to 93%  $\pm$  1% of the Usable Capacity stated in Form No. 1?    ☒ **Yes**            ☐ **No**

**DATA SHEET NO. 3**  
**DUMMY LONGITUDINAL CLEARANCE DIMENSIONS**

Test Vehicle: 2020 Mitsubishi Eclipse Cross SUV  
 Test Program: NCAP Side MDB Impact Test

NHTSA No.: M20205602  
 Test Date: 11/5/2019

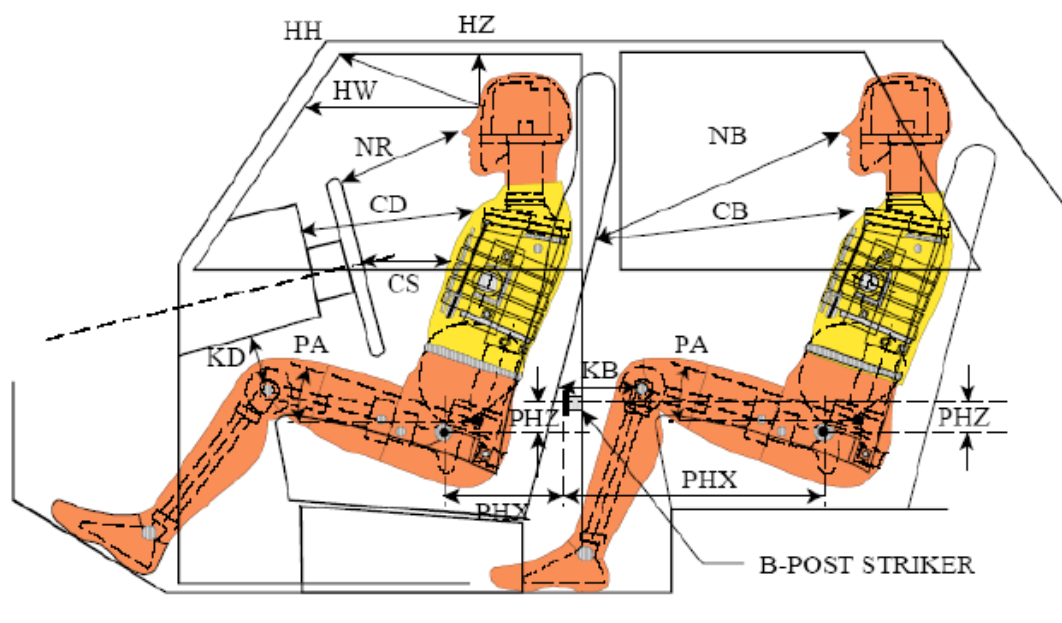

**LEFT SIDE VIEW**

NOTE: 2-DOOR VEHICLE SHOWN.  
 REAR DUMMY PHX & PHZ  
 MEASUREMENTS FOR A 4-DOOR  
 VEHICLE WOULD USE THE C-POST  
 STRIKER AS A REFERENCE POINT


**DUMMY LONGITUDINAL CLEARANCE DIMENSION INFORMATION**

Driver Code	Pass. Code	Description	Driver (Serial No. F034)		Passenger (Serial No.300)	
			Length (mm)	Angle	Length (mm)	Angle
HH		Header to Header	422			
HW		Header to Windshield	690			
HZ	HZ	Head to Roof Liner	179		264	
NR	NB	Nose to Rim/Seat Back	468		544	
CD	CB	Chest to Dash/Seat Back	543		564	
CS		Chest to Steering Wheel	342			
KD(L)/KDA(L)°	KB(L)/KBA(L)°	Left Knee to Dash/Seat Back	156	22.3	321	1.8
KD(R)/KDA(R)°	KB(R)/KBA(R)°	Right Knee to Dash/Seat Back	174	11.8	319	0.9
PAX°	PAX°	Pelvic Tilt Angle X		22.3		19.9
	PAY°	Pelvic Tilt Angle Y				0.3
PHX	PHX	Hip Point to Striker (X-Axis)	256		197	
PHZ	PHZ	Hip Point to Striker (Z-Axis)	159		214	

**DATA SHEET NO. 4**  
**DUMMY LATERAL CLEARANCE DIMENSIONS**

Test Vehicle: 2020 Mitsubishi Eclipse Cross SUV  
 Test Program: NCAP Side MDB Impact Test

NHTSA No.: M20205602  
 Test Date: 11/5/2019

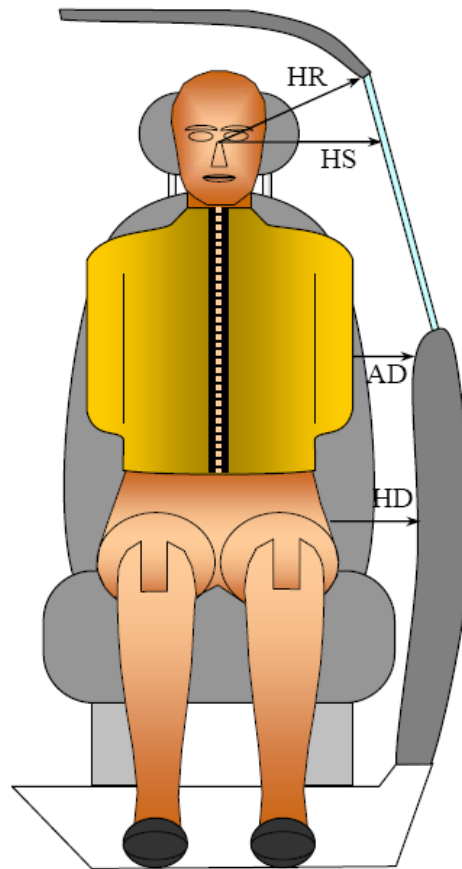

*FRONT VIEW OF DUMMY*

**DUMMY LATERAL CLEARANCE DIMENSION INFORMATION**


Code	Measurement Description	Units	Driver (Serial No. F034)	Passenger (Serial No. 300)
HR	Head to Side Header	mm	184	248
HS	Head to Side Window	mm	318	359
AD	Arm to Door	mm	91	178
HD	Hip Point to Door	mm	148	167



**DATA SHEET NO. 5**  
**CAMERA AND INSTRUMENTATION DATA**

Test Vehicle: 2020 Mitsubishi Eclipse Cross SUV  
Test Program: NCAP Side MDB Impact Test

NHTSA No.: M20205602  
Test Date: 11/5/2019

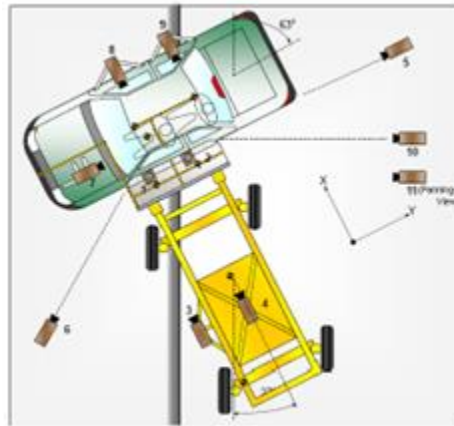

**CAMERA LOCATIONS AND DATA**

No.	Camera View	Coordinates (mm)			Lens Length (mm)	Operating Frame Rate (fps)
		X	Y	Z		
1	Overhead Overall	0	-376	-8300	12.5	1000
2	Overhead Close-up	-206	-849	-8300	24	1000
3	Left Impact Point (MDB)	-1470	0	-847	25	1000
4	Side Overall (MDB)	-1140	878	-1587	8	1000
5	Rear	0	8896	-1253	24	1000
6	Left Front	2610	-4459	-1149	24	1000
7	Driver Front (OB)				25	1000
8	Driver Side (OB)				12.5	1000
9	Passenger Side (OB)				12.5	1000
10	Real-time Left Rear				Zoom	60
11	Real-time In run				Zoom	60

Notes: *Reference: Impact Point projected to Ground*  
*+X = To Front of MDB, +Y = To Right of MDB, +Z = Down*  
*\*All measurements accurate to  $\pm 6$  mm.*

If applicable, explain why camera(s) did not operate as intended: All cameras operated normally


**INSTRUMENTATION**

Driver Dummy Channels	16
Passenger Dummy Channels	16
Vehicle Structure Accelerometers	23
MDB Accelerometers	7
<b>Total</b>	<b>62</b>

## DATA SHEET NO. 6 TEST VEHICLE ACCELEROMETER LOCATIONS

Test Vehicle: 2020 Mitsubishi Eclipse Cross SUV  
Test Program: NCAP Side MDB Impact Test

NHTSA No.: M20205602  
Test Date: 11/5/2019

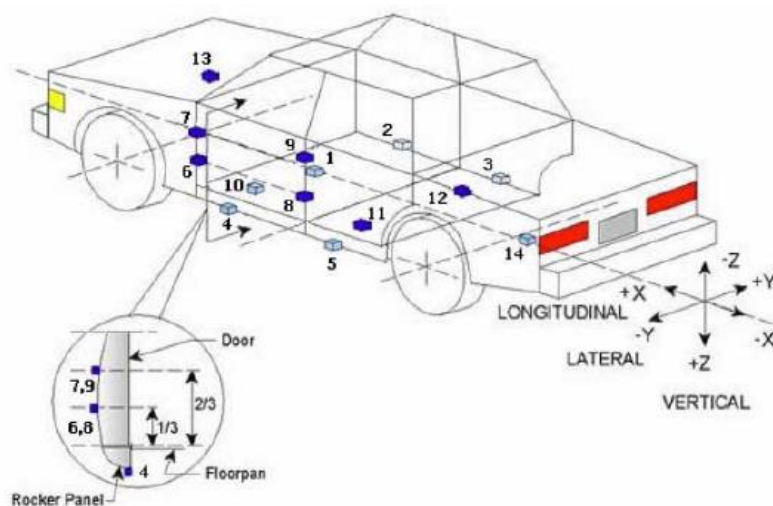

### TEST VEHICLE ACCELEROMETER LOCATIONS


No.	Accelerometer Location	Coordinates (mm)		
		X	Y	Z
1	Vehicle CG	2242	-26	23
2	Right Sill at Front Seat	2552	642	296
3	Right Sill at Rear Seat	1597	634	301
4	Left Sill at Front Door	2565	-640	287
5	Left Sill at Rear Door	1642	-626	299
6	A-Post Lower	2974	-583	86
7	A-Post Middle	2892	-654	-450
8	B-Post Lower	1883	-658	-6
9	B-Post Middle	1818	-658	-391
10	Front Seat Track	2064	-599	244
11	Rear Seat Structure	1526	-486	177
12	Rt. Rear Occ. Compartment	1693	367	404
13	Engine Block	3591	171	-85
14	Rear Above Axle	869	35	129

Reference: X – Rear surface of vehicle (+ forward)  
Y – Vehicle centerline (+ to right)  
Z – Ground plane (+ down)

**DATA SHEET NO. 7**  
**MDB ACCELEROMETER LOCATIONS**

Test Vehicle: 2020 Mitsubishi Eclipse Cross SUV  
 Test Program: NCAP Side MDB Impact Test

NHTSA No.: M20205602  
 Test Date: 11/5/2019

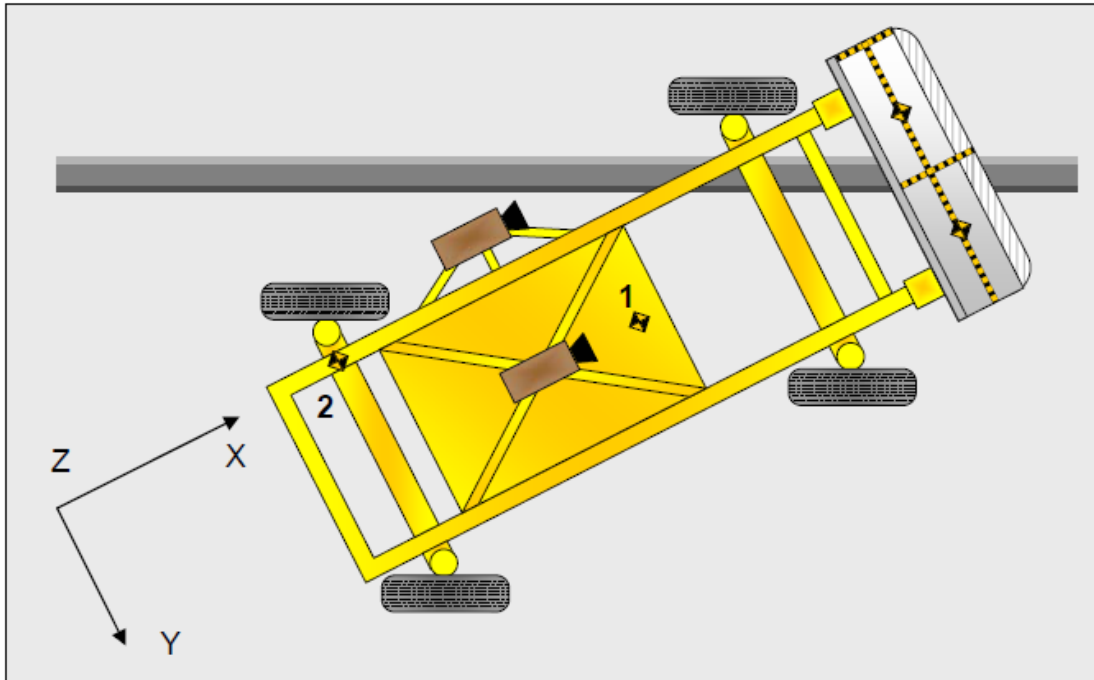

**MDB ACCELEROMETER LOCATIONS**

No.	Accelerometer Location	Coordinates (mm)		
		X	Y	Z
1	MDB CG	1859	0	-330
2	MDB Rear	386	-660	-660

Reference: X – Face of MDB (+ forward)  
 Y – MDB centerline (+ to right)  
 Z – Ground plane (+ down)

**DATA SHEET NO. 8**  
**POST-TEST OBSERVATIONS**

Test Vehicle: 2020 Mitsubishi Eclipse Cross SUV  
Test Program: NCAP Side MDB Impact Test

NHTSA No.: M20205602  
Test Date: 11/5/2019

**TEST DUMMY INFORMATION AND CONTACT POINTS**

Dummy Body Part	Front Seat Dummy (ES-2re)	Rear Seat Dummy (SID-IIs)
Face	Curtain Airbag	Curtain Airbag
Top of Head	Side Header	Curtain Airbag & Side Header
Left Side of Head	Curtain Airbag & Side Header	Curtain Airbag
Back of Head	Curtain Airbag, Side Header, Headrest	Curtain Airbag & Headrest
Left Shoulder	Torso/Pelvis Airbag	Passenger Door
Upper Torso	Torso/Pelvis Airbag	Passenger Door
Lower Torso	Seatback & Torso/Pelvis Airbag	Passenger Door
Left Hip	Seatpan & Torso/Pelvis Airbag	Passenger Door
Left Knee	Driver Door	Passenger Door

**POST-TEST DOOR PERFORMANCE**

Description	Struck Side		Non-Struck Side		Rear Hatch/ Other*
	Front	Rear	Front	Rear	
Remained Closed and Operational	No	No	Yes	Yes	Yes
Total Separation from Vehicle at Hinges or Latches	No	No	No	No	No
Latch or Hinge Systems Pulled Out of Their Anchorages	No	No	No	No	No
Disengaged from Latched Position	No	No	No	No	No
Latch Separated from Striker	No	No	No	No	No
Jammed Shut	Yes	Yes	No	No	No
If Door Opened at Striker, Width of Opening at Striker (mm)	0	0	0	0	0

\*Tailgate opened during impact but is still operational.

**POST-TEST SEAT PERFORMANCE**

Description	Struck Side		Non-Struck Side	
	Front	Rear	Front	Rear
Seat Movement Along Seat Track	No	No	No	No
Seat Disengagement from Floor Pan	No	No	No	No
Seat Back Movement from Initial Position	No	No	No	No
Seat Back Collapse	No	No	No	No

**POST-TEST STRUCTURAL OBSERVATIONS**

Critical Areas of Performance	Observations and Conclusions
Pillar Performance	B-Pillar & C-Pillar buckled
Sill Separation	None
Windshield Damage	None
Side Window Damage	Driver Window Shattered
Other Notable Effects	None

**DATA SHEET NO. 8 ... (CONTINUED)**  
**POST-TEST OBSERVATIONS**

Test Vehicle: 2020 Mitsubishi Eclipse Cross SUV  
 Test Program: NCAP Side MDB Impact Test

NHTSA No.: M20205602  
 Test Date: 11/5/2019

**SUPPLEMENTAL RESTRAINT SYSTEM INFORMATION**

Restraint Type	Struck Side Driver		Struck Side Rear Passenger	
	Mounted	Deployed	Mounted	Deployed
Frontal Air bag	Yes	No		
Knee Air bag	Yes	No		
Side Air bag 1 - Curtain	Yes	Yes	Yes	Yes
Side Air bag 2 - Torso/Pelvis Air bag	Yes	Yes	No	N/A
Seat Belt Pretensioner	Yes	Yes	No	N/A
Seat Belt Load Limiter	Yes	Yes	No	N/A
Other				

**IMPACT POINT LOCATION DATA**

Measured Parameter	Units	Tolerance	Value
Vehicle Wheel Base	mm		2668
Vertical Impact Reference Line (Aft of Front Axle - Intended Impact Point)	mm		394
Actual Impact Point (Aft of Frontal Axle)	mm		394
Horizontal Offset (+ forward / - rearward)	mm	+/- 50 of Intended Impact Point	0
Vertical Offset (+ down / - up)	mm	+/- 20 of Intended Impact Point	+1

**DATA SHEET NO. 9**  
**MDB SUMMARY OF RESULTS**

Test Vehicle: 2020 Mitsubishi Eclipse Cross SUV  
Test Program: NCAP Side MDB Impact Test

NHTSA No.: M20205602  
Test Date: 11/5/2019

**MDB SPECIFICATIONS**

Measurement Description	Length (mm)
Overall Width of Framework Carriage	1,250
Overall Length Including Honeycomb Frame	4,120
Wheelbase of Framework Carriage	2,600
CG Location of Front Axle	1,120

**MDB WEIGHTS**

	Units	Front Axle	Rear Axle	Total
Left	kg	392.5	297.5	690.0
Right	kg	386.0	291.5	677.5
Ratio	%	57.4%	42.6%	100.0%
Totals	kg	778.5	589.0	1367.5

**SPEED AND ANGLE AT IMPACT DATA**

Measured Parameter	Units	Requirement	Value
Trap No. 1 Velocity (Primary)	km/h	61.10 to 62.70	61.69
Trap No. 2 Velocity (Redundant)	km/h	61.10 to 62.70	61.75
MDB CL to Target Vehicle CL	degrees	88.5 to 91.5	90.0
MDB Forward Line of Motion to Target Vehicle CL	degrees	62.5 to 63.5	63.0
MDB Crabbed angle to MDB Forward Line of Motion	degrees	26.0 to 28.0	27.0

**MAXIMUM STATIC CRUSH OF HONEYCOMB IMPACT FACE**

Vertical Location			From Centerline		Maximum Crush (mm)
Row	Description	Height (mm)	Distance (mm)	Direction	
A	Center of Bumper	432	800	Left	213
B	Top of Bumper	533	800	Left	121
C	Mid-Level	686	800	Left	157
D	Top of Stack	813	800	Left	171


**DATA SHEET NO. 10**  
**TEST VEHICLE PROFILE MEASUREMENTS**

Test Vehicle: 2020 Mitsubishi Eclipse Cross SUV

NHTSA No.: M20205602

Test Program: NCAP Side MDB Impact Test

Test Date: 11/5/2019

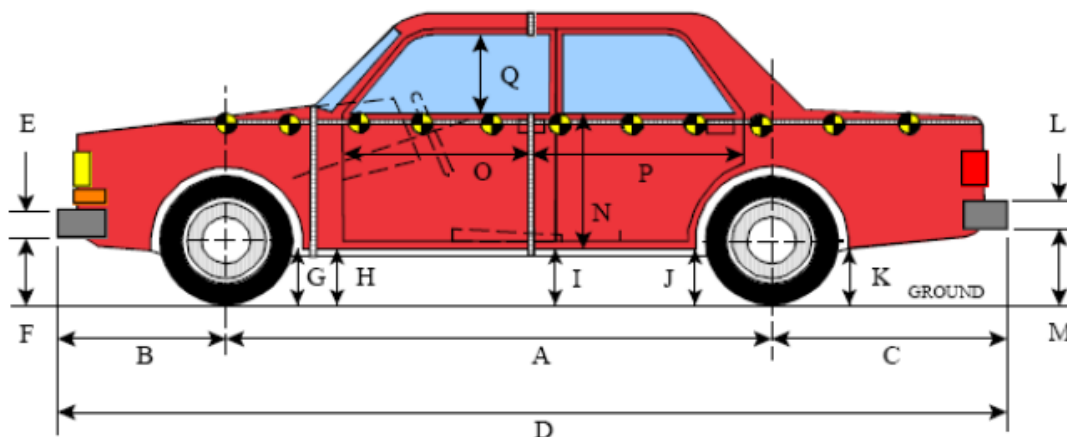

**LEFT SIDE VIEW**

All MEASUREMENTS IN (mm) WITH TOLERANCE OF  $\pm 3$ mm

**VEHICLE PRE- AND POST-TEST MEASUREMENT INFORMATION**

Code	Description	Pre-Test	Post-Test	Difference
A	Wheelbase	2668	2668	0
B	Front Axle to FSOV	955	955	0
C	Rear Axle to RSOV	781	779	-2
D	Total Length at Centerline	4403	4403	0
E	Front Bumper Thickness	255	255	0
F	Front Bumper Bottom to Ground	505	505	0
G	Sill Height at Front Wheel Well	253	255	2
H	Sill Height at Front Door Leading Edge	253	255	2
I	Sill Height at B Pillar	241	243	2
J1	Sill Height at Rear Wheel Well	246	256	10
J2	Pinch Weld Height at Rear Wheel Well	244	249	5
K	Sill Height Aft of Rear Wheel Well	300	310	10
L	Rear Bumper Thickness	93	90	-3
M	Rear Bumper Bottom to Ground	630	640	10
N	Sill Height to Window Bottom of Front Window Sill	895	804	-91
O	Front Door Leading Edge to Impact CL	729	713	-16
P	Rear Door Trailing Edge to Impact CL	1284	1212	-72
Q	Front Window Opening	456	440	-16
R	Right Side Length	4325	4325	0
S	Left Side Length	4323	4322	-1
T	Maximum Vehicle Width	1809	1673	-136


**DATA SHEET NO. 11**  
**TEST VEHICLE EXTERIOR CRUSH MEASUREMENTS**

Test Vehicle: 2020 Mitsubishi Eclipse Cross SUV

NHTSA No.: M20205602

Test Program: NCAP Side MDB Impact Test

Test Date: 11/5/2019

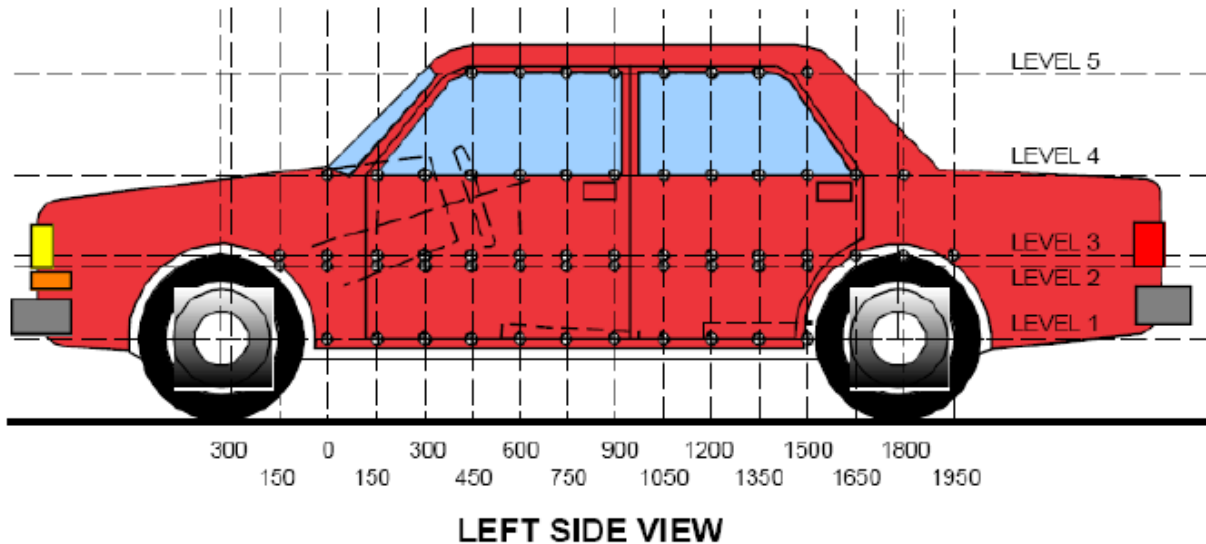

**MAXIMUM EXTERIOR CRUSH MEASUREMENTS**

Level	Measurement Description	Units	Height Above Ground	Maximum Exterior Static Crush	Distance from Impact
1	Sill Top	mm	349	87	1200
2	Driver Hip Point	mm	710	200	1650
3	Mid-Door	mm	758	200	1500
4	Window Sill	mm	1040	86	1800
5	Window Top	mm	1578	6	1350

\*window top level bent outward from original position

**NOTE:** The above measurements should be taken along the vertical impact reference line.  
Vehicle measurements forward of the vertical impact reference line are negative.



**DATA SHEET NO. 11 ... (CONTINUED)**  
**TEST VEHICLE EXTERIOR CRUSH MEASUREMENTS**

Test Vehicle: 2020 Mitsubishi Eclipse Cross SUV  
 Test Program: NCAP Side MDB Impact Test

NHTSA No.: M20205602  
 Test Date: 11/5/2019

**EXTERIOR CRUSH MEASUREMENTS AT EACH LEVEL**


	Pre-Test					Post-Test					Difference				
	1	2	3	4	5	1	2	3	4	5	1	2	3	4	5
-900															
-750															
-600															
-450															
-300				835					838					-3	
-150		902	899	836			899	896	838			3	3	-2	
0		901	901	826			894	896	828			7	5	-2	
150	884	897	898	830		851	817	817	840		33	80	81	-10	
300	886	897	898	899		836	719	727	867		50	178	171	32	
450	886	897	898	846		839	707	708	806		47	190	190	40	
600	889	896	897	853		846	705	699	814		43	191	198	39	
750	890	894	896	860	595	851	708	699	821	594	39	186	197	39	1
900	893	893	895	865	618	855	722	713	828	617	38	171	182	37	1
1050	893	891	893	868	620	857	740	740	833	617	36	151	153	35	3
1200	893	890	891	870	619	806	736	727	826	615	87	154	164	44	4
1350	896	888	890	869	616	817	696	691	807	610	79	192	199	62	6
1500	895	888	888	863	611	830	690	688	795	606	65	198	200	68	5
1650	893	895	893	850	604	850	695	694	778	600	43	200	199	72	4
1800	891	899	900	841	594	874	720	724	755	592	17	179	176	86	2
1950		899	898	842	582		902	892	808	582		-3	6	34	0
2100				850	561				898	561				-48	0
2250				856					848					8	
2400				856					852					4	
2550				848					848					0	
2700															
2850															
3000															

**NOTE:** Pre-test measurements are taken when the vehicle is in the "As Tested" weight condition.  
 Vehicle measurements forward of the vertical impact reference line are negative.  
 The crush profile grid is established prior to test based on an estimated impact point.

**DATA SHEET NO. 11 (CONTINUED)**  
**TEST VEHICLE EXTERIOR CRUSH MEASUREMENTS**

Test Vehicle: 2020 Mitsubishi Eclipse Cross SUV  
 Test Program: NCAP Side MDB Impact Test

NHTSA No.: M20205602  
 Test Date: 11/5/2019

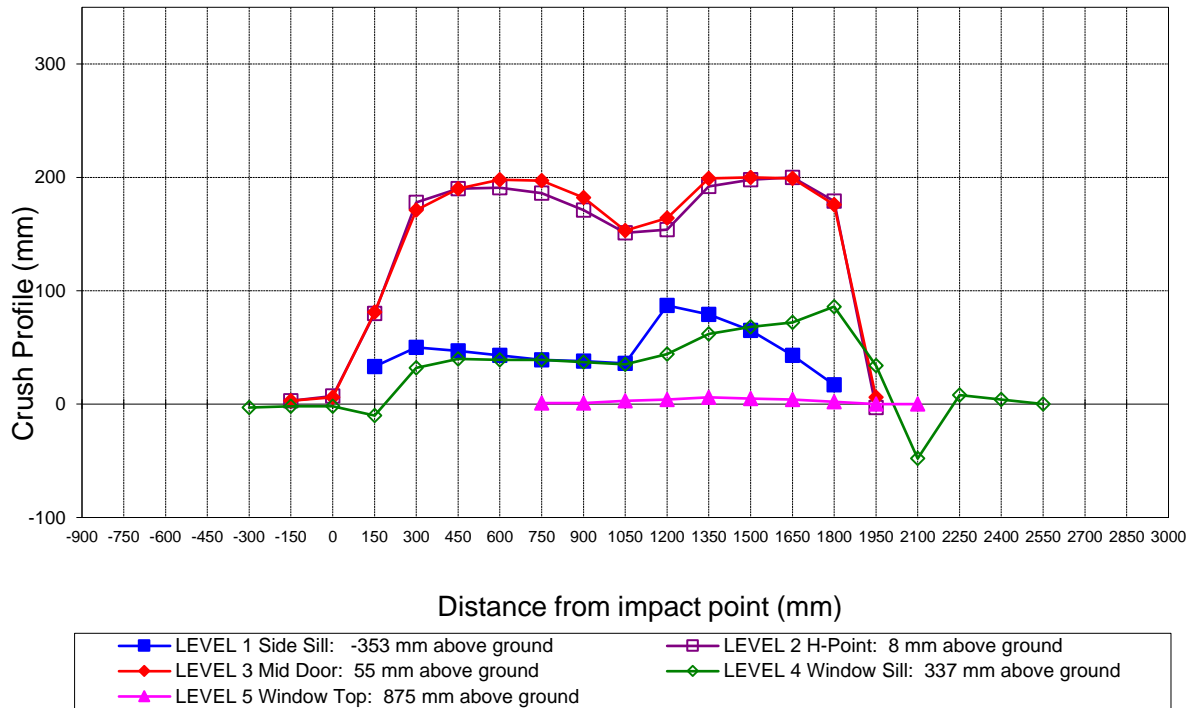


**Vehicle Exterior Crush Measurements - Visual Representation**

**DATA SHEET NO. 12**  
**MDB EXTERIOR STATIC CRUSH MEASUREMENTS**

Test Vehicle: 2020 Mitsubishi Eclipse Cross SUV  
 Test Program: NCAP Side MDB Impact Test

NHTSA No.: M20205602  
 Test Date: 11/5/2019

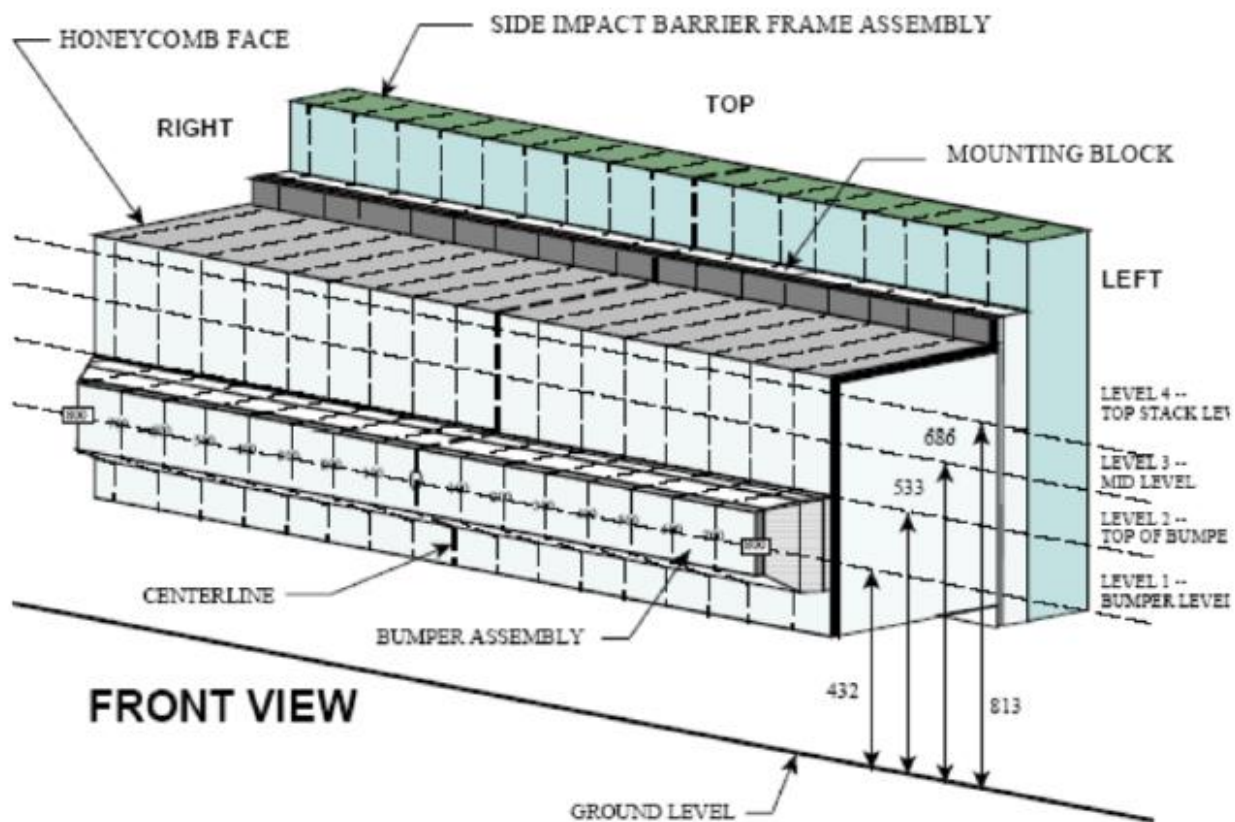

NOTE: Dimensions are shown in millimeters, mm

**DEFORMABLE BARRIER STATIC CRUSH**


Stack Level	Distance Right of Center								C/L	Distance Left of Center							
	800	700	600	500	400	300	200	100		0	100	200	300	400	500	600	700
1	201	203	197	197	198	198	198	199	207	200	199	198	200	200	200	209	213
2	101	99	98	99	98	107	97	104	104	99	99	99	99	98	100	108	121
3	37	33	30	34	46	70	91	72	51	41	36	35	38	47	60	81	157
4	47	38	36	45	64	96	109	89	65	58	64	71	71	80	97	124	171

# **DATA SHEET NO. 13** **VEHICLE AND MDB DAMAGE PROFILE DISTANCES**

Test Vehicle: 2020 Mitsubishi Eclipse Cross SUV  
 Test Program: NCAP Side MDB Impact Test

NHTSA No.: M20205602  
 Test Date: 11/5/2019

For guidance regarding damage profile distance measurements, please refer to the latest version of the *NHTSA Test Reference Guide, Volume 1: Vehicle Tests*.

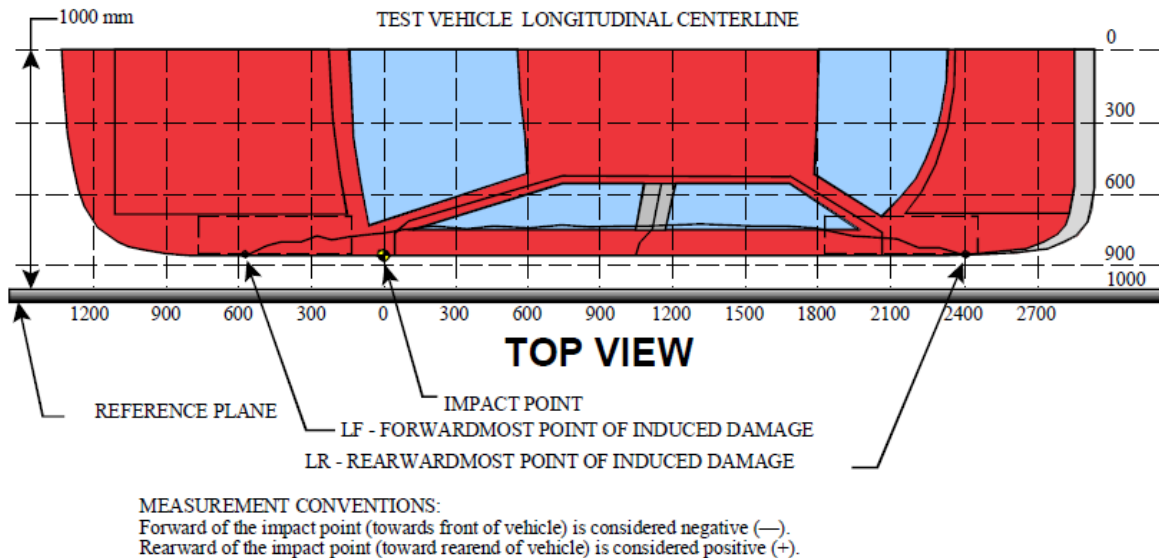

## **VEHICLE DAMAGE PROFILE DISTANCES**

DPD	Distance From Impact Point (mm)	Level	Post-Test (mm)	Pre-Test (mm)	Crush (mm)
1	-150	3	104	101	3
2	270	3	255	102	153
3	690	3	301	104	197
4	1110	3	265	108	157
5	1530	3	311	111	200
6	1950	3	108	102	6

## **MDB DAMAGE PROFILE DISTANCES**

DPD	Distance From Center of MDB	Level	Post-Test (mm)*
1	800 mm left of center	1	213
2	480 mm left of center	1	199
3	160 mm left of center	1	199
4	160 mm right of center	1	198
5	480 mm right of center	1	197
6	800 mm right of center	1	201

**DATA SHEET NO. 14**  
**FMVSS NO. 301 STATIC ROLLOVER RESULTS**

Test Vehicle: <u>2020 Mitsubishi Eclipse Cross SUV</u>	NHTSA No.: <u>M20205602</u>
Test Program: <u>NCAP Side MDB Impact Test</u>	Test Date: <u>11/5/2019</u>

Test Time: <u>11:12 AM</u>	Temperature: <u>21°C</u>
----------------------------	--------------------------

- |   |                             |
|---|-----------------------------|
| A. From impact until vehicle motion ceases:<br>(Maximum allowable is 1 oz.)     | <u>0</u> oz.                |
| B. For the 5-minute period after motion ceases:<br>(Maximum allowable is 5 oz.) | <u>0</u> oz.                |
| C. For the following 25 minutes:<br>(Maximum allowable is 1 oz./minute)         | <u>0</u> oz.                |
| D. Spillage Details:  | <u>No Spillage Occurred</u> |

**FMVSS NO. 301 STATIC ROLLOVER DATA**



**ROLLOVER SOLVENT COLLECTION TIME TABLE IN SECONDS**

Test Phase	Rotation Time	Hold Time	Total Time
0° to 90°	70	300	370
90° to 180°	61	300	361
180° to 270°	64	300	364
270° to 360°	65	300	365

**FMVSS NO. 301 ROLLOVER SPILLAGE TABLE**

Test Phase	First 5 Minutes	Sixth Minute	Seventh Minute	Eighth Minute
0° to 90°	0	0	0	
90° to 180°	0	0	0	
180° to 270°	0	0	0	
270° to 360°	0	0	0	


**ROLLOVER SOLVENT SPILLAGE LOCATION TABLE**

Test Phase	Spillage Location
0° to 90°	None
90° to 180°	None
180° to 270°	None
270° to 360°	None

**DATA SHEET NO. 15**  
**DUMMY/VEHICLE TEMPERATURE AND HUMIDITY STABILIZATION DATA**

Test Vehicle: 2020 Mitsubishi Eclipse Cross SUV  
 Test Program: NCAP Side MDB Impact Test

NHTSA No.: M20205602  
 Test Date: 11/5/2019

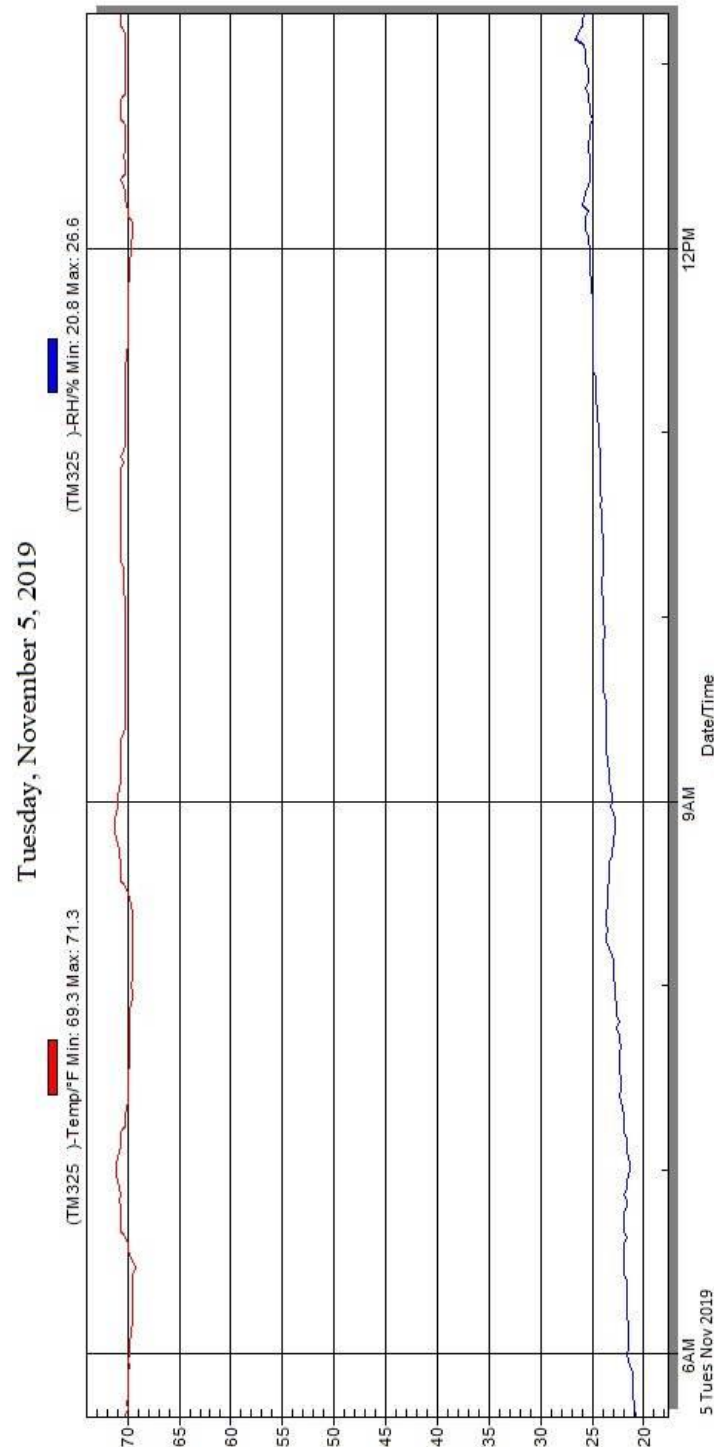

**Temperature and Humidity Stabilization Chart/Data for Dummies and Test Vehicle**

**APPENDIX A**  
**PHOTOGRAPHS**

## TABLE OF PHOTOGRAPHS

<b>Fig.</b>	<b>Description</b>	<b>Page</b>
1	As-Delivered Right Front 3/4 View of Test Vehicle	A-5
2	As-Delivered Left Rear 3/4 View of Test Vehicle	A-5
3	Pre-Test Frontal View of Test Vehicle	A-6
4	Post-Test Frontal View of Test Vehicle	A-6
5	Pre-Test Left Front 3/4 View of Test Vehicle	A-7
6	Post-Test Left Front 3/4 View of Test Vehicle	A-7
7	Pre-Test Left Side View of Test Vehicle	A-8
8	Post-Test Left Side View of Test Vehicle	A-8
9	Pre-Test Left Rear 3/4 View of Test Vehicle	A-9
10	Post-Test Left Rear 3/4 View of Test Vehicle	A-9
11	Pre-Test Rear View of Test Vehicle	A-10
12	Post-Test Rear Side View of Test Vehicle	A-10
13	Pre-Test Right Side View of Test Vehicle	A-11
14	Post-Test Right Side View of Test Vehicle	A-11
15	Pre-Test Overhead View of Test Area	A-12
16	Post-Test Overhead View of Test Area	A-12
17	Pre-Test Left Side View of MDB Positioned Against Side of Test Vehicle	A-13
18	Pre-Test Right Side View of MDB Positioned Against Side of Test Vehicle	A-13
19	Pre-Test Close-Up View of Impact Point Target	A-14
20	Post-Test Close-up View of Impact Point Target	A-14
21	Pre-Test Left Front Door Latch Close-Up	A-15
22	Post-Test Left Front Door Latch Close-Up	A-15
23	Pre-Test Left Rear Door Latch Close-Up	A-16
24	Post-Test Left Rear Door Latch Close-Up	A-16
25	Pre-Test Front Close-up View of Driver Dummy	A-17
26	Post-Test Front Close-up View of Driver Dummy	A-17
27	Pre-Test Left Side View of Driver Dummy Showing Belt and Chalking	A-18
28	Pre-Test Left Side View of Driver Dummy Shoulder and Door Top View	A-18
29	Post-Test Left Side View of Driver Dummy Shoulder and Door Top View	A-19
30	Pre-Test Frontal View of Driver Seat Back Prior to Dummy Positioning	A-19
31	Pre-Test Frontal View of Driver Dummy Head and Shoulders in Relation to Head Restraint	A-20
32	Pre-Test Frontal View of Driver Seat Pan Prior to Dummy Positioning	A-20
33	Pre-Test Overhead View of Driver Dummy Thighs on Seat Pan	A-21
34	Pre-Test Placement of Driver Dummy's Feet	A-21



<b>Fig.</b>	<b>Description</b>	<b>Page</b>
35	Pre-Test View of Belt Anchorage for Driver Dummy	A-22
36	Pre-Test Left Side View of Steering Wheel	A-22
37	View of Disengaged Parking Brake	A-23
38	Pre-Test View of Parking Brake	A-23
39	Pre-Test Close-Up Left Side View of Driver Seat Track	A-24
40	Pre-Test Close-Up Left Side View of Driver Seat Back	A-24
41	Pre-Test Close-Up View of Driver Seat Back or Head Restraint	A-25
42	Pre-Test Driver Dummy and Door Clearance View	A-25
43	Post-Test Driver Dummy and Door Clearance View	A-26
44	Pre-Test Right Side View of Driver Dummy and Front Seat of Occupant Compartment	A-26
45	Post-Test Right Side View of Driver Dummy and Front Seat of Occupant Compartment	A-27
46	Pre-Test Driver Inner Door Panel View	A-27
47	Post-Test Driver Inner Door Panel View	A-28
48	Post-Test Driver Dummy Close-Up Head Contact with Vehicle View	A-28
49	Post-Test Driver Dummy Close-Up Head Contact with Side Air bag View	A-29
50	Post-Test Driver Dummy Close-Up Torso Contact with Vehicle Interior View	A-29
51	Post-Test Driver Dummy Close-Up Torso Contact with Side Air bag View	A-30
52	Post-Test Driver Dummy Close-Up Pelvis Contact View	A-30
53	Post-Test Driver Dummy Close-Up Pelvis Contact with Side Air bag View	A-31
54	Post-Test Driver Dummy Close-Up Knee Contact View	A-31
55	Pre-Test Left Side View of Rear Passenger Dummy Showing Belt and Chalking	A-32
56	Pre-Test Left Side View of Rear Passenger Dummy Shoulder and Door Top View	A-32
57	Post-Test Left Side View of Rear Passenger Dummy Shoulder and Door Top View	A-33
58	Pre-Test Frontal View of Rear Passenger Seat Back Prior to Dummy Positioning	A-33
59	Pre-Test Frontal View of Rear Passenger Dummy Head and Shoulders in Relation to Head Restraint	A-34
60	Pre-Test Overhead View of Rear Passenger Seat Pan Prior to Dummy Positioning	A-34
61	Pre-Test Overhead View of Rear Passenger Dummy Thighs on Seat Pan	A-35
62	Pre-Test View of Rear Passenger Dummy's Neck Showing Position of Adjustable Neck Bracket	A-35
63	Pre-Test View of Rear Passenger Dummy's Head Showing Dummy's Head is Level	A-36
64	Pre-Test Placement of Rear Passenger Dummy's Feet	A-36
65	Pre-Test View of Belt Anchorage for Rear Passenger Dummy	A-37
66	Pre-Test Close-Up Left Side View of Rear Passenger Seat Track	A-37
67	Pre-test Close-Up Left Side View of Rear Passenger Seat Back	A-38
68	Pre-Test Close-Up View of Rear Passenger Seat Back or Head Restraint	A-38

<b>Fig.</b>	<b>Description</b>	<b>Page</b>
69	Pre-Test Rear Passenger Dummy and Door Clearance View	A-39
70	Post-Test Rear Passenger Dummy and Door Clearance View	A-39
71	Pre-Test Right Side View of Rear Passenger Dummy and Rear Seat Occupant Compartment	A-40
72	Post-Test Right Side View of Rear Passenger Dummy and Rear Seat Occupant Compartment	A-40
73	Pre-Test Rear Passenger Inner Door Panel View	A-41
74	Post-Test Rear Passenger Inner Door Panel View Showing Rear Passenger Dummy Contact Locations	A-41
75	Post-Test Rear Passenger Dummy Close-Up Head Contact with Vehicle View	A-42
76	Post-Test Rear Passenger Dummy Close-Up Head Contact with Side Air bag View	A-42
77	Post-Test Rear Passenger Dummy Close-Up Torso Contact with Vehicle Interior View	A-43
78	Post-Test Rear Passenger Dummy Close-Up Torso Contact with Side Air bag View	A-43
79	Post-Test Rear Passenger Dummy Close-Up Pelvis Contact View	A-44
80	Post-Test Rear Passenger Dummy Close-Up Pelvis Contact with Side Air bag View	A-44
81	Post-Test Rear Passenger Dummy Close-Up Knee Contact View	A-45
82	Pre-Test View of Fuel Filler Cap or Fuel Filler Neck	A-45
83	Post-Test View of Fuel Filler Cap or Fuel Filler Neck	A-46
84	Pre-Test Front View of MDB Impactor Face	A-46
85	Post-Test Front View of MDB Impactor Face	A-47
86	Pre-Test Top View of MDB Impactor Face	A-47
87	Post-Test Top View of MDB Impactor Face	A-48
88	Pre-Test Left Side View of MDB Impactor Face	A-48
89	Post-Test Left Side View of MDB Impactor Face	A-49
90	Pre-Test Right Side View of MDB Impactor Face	A-49
91	Post-Test Right Side View of MDB Impactor Face	A-50
92	Close-Up View of Vehicle's Certification Label	A-50
93	Close-Up View of Vehicle's Tire Information Placard or Label	A-51
94	Pre-Test Ballast View	A-51
95	Post-Test Primary and Redundant Speed Trap Read-Out	A-52
96	FMVSS No. 301 Static Rollover 0 Degrees	A-52
97	FMVSS No. 301 Static Rollover 90 Degrees	A-53
98	FMVSS No. 301 Static Rollover 180 Degrees	A-53
99	FMVSS No. 301 Static Rollover 270 Degrees	A-54
100	FMVSS No. 301 Static Rollover 360 Degrees	A-54
101	Impact Event	A-55
102	Monroney Label	A-55
103	Driver Head Restraint Use and Adjustment Information from Vehicle Owner's Manual	A-56
104	Left Rear Passenger Head Restraint Use and Adjustment Information from Vehicle Owner's Manual	A-56




**Figure A-1: As-Delivered Right Front 3/4 View of Test Vehicle**




**Figure A-2: As-Delivered Left Rear 3/4 View of Test Vehicle**



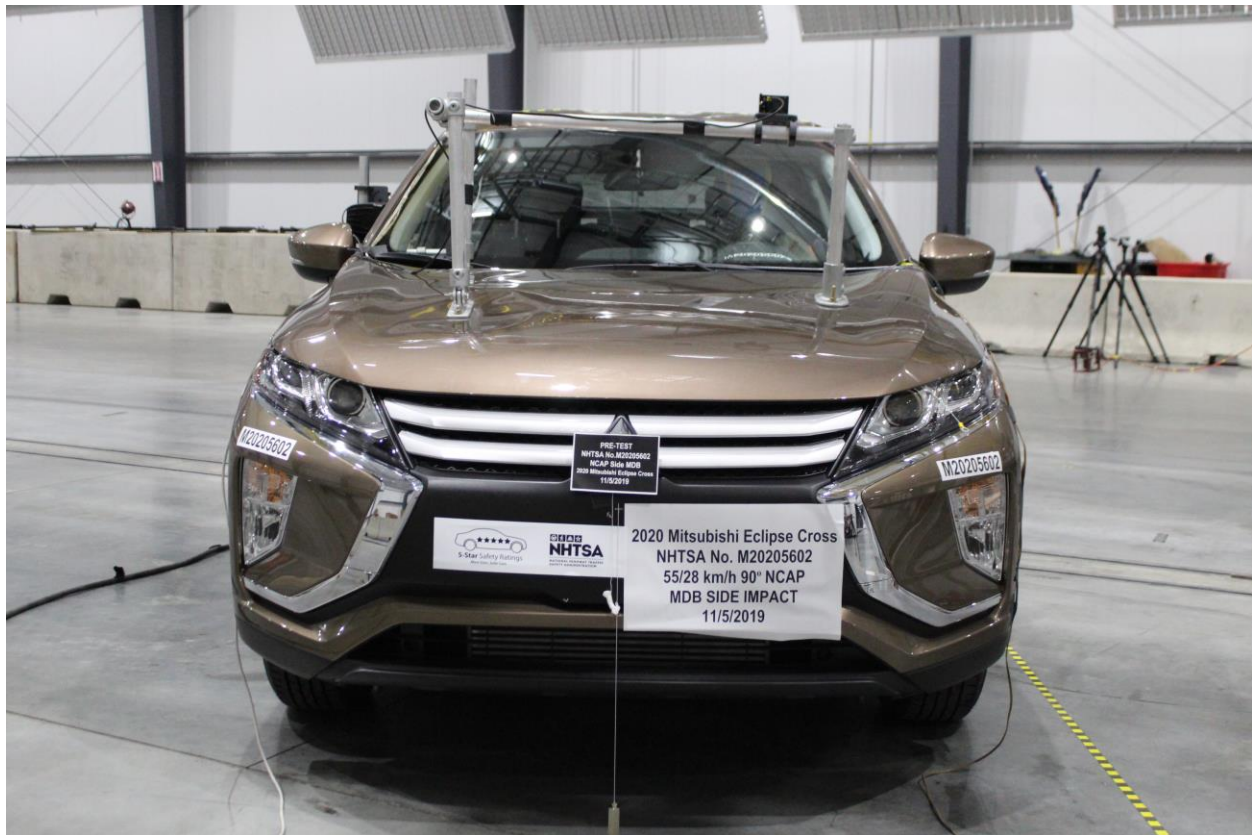

**Figure A-3: Pre-Test Frontal View of Test Vehicle**

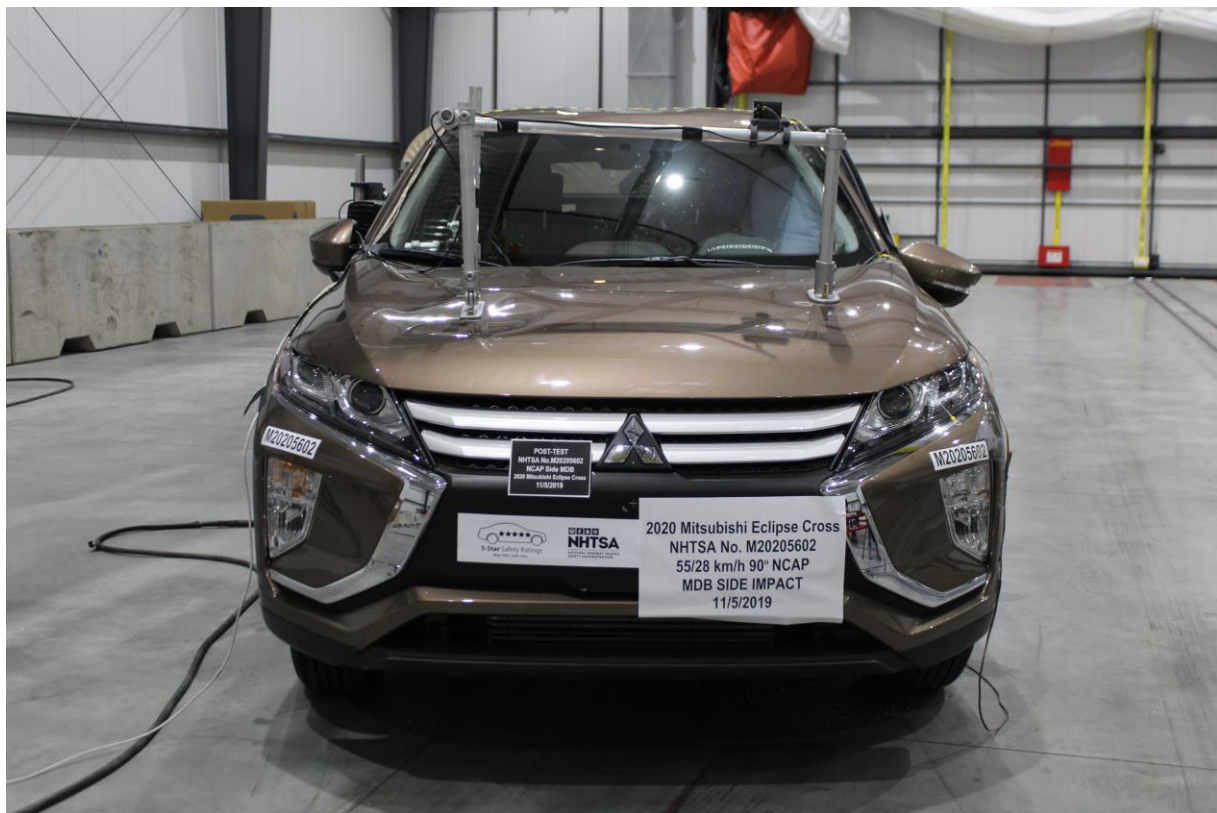

**Figure A-4: Post-Test Frontal View of Test Vehicle**



**Figure A-5: Pre-Test Left Front  $\frac{3}{4}$  View of Test Vehicle**



**Figure A-6: Post-Test Left Front  $\frac{3}{4}$  View of Test Vehicle**





**Figure A-7: Pre-Test Left Side View of Test Vehicle**



**Figure A-8: Post-Test Left Side View of Test Vehicle**





**Figure A-9: Pre-Test Left Rear  $\frac{3}{4}$  View of Test Vehicle**



**Figure A-10: Post-Test Left Rear  $\frac{3}{4}$  View of Test Vehicle**



**Figure A-11: Pre-Test Rear View of Test Vehicle**



**Figure A-12: Post-Test Rear Side View of Test Vehicle**






**Figure A-13: Pre-Test Right Side View of Test Vehicle**



**Figure A-14: Post-Test Right Side View of Test Vehicle**




**Figure A-15: Pre-Test Overhead View of the Test Area**

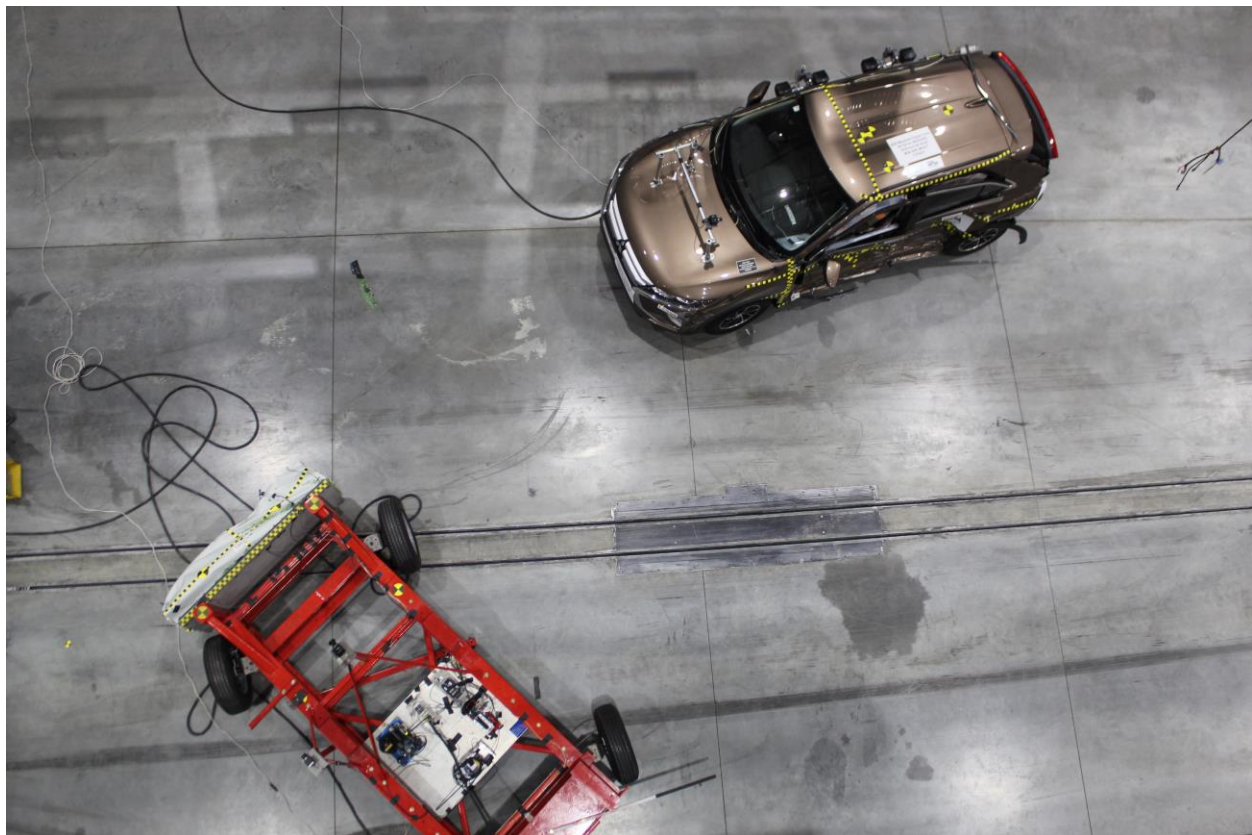


**Figure A-16: Post-Test Overhead View of Test Area**



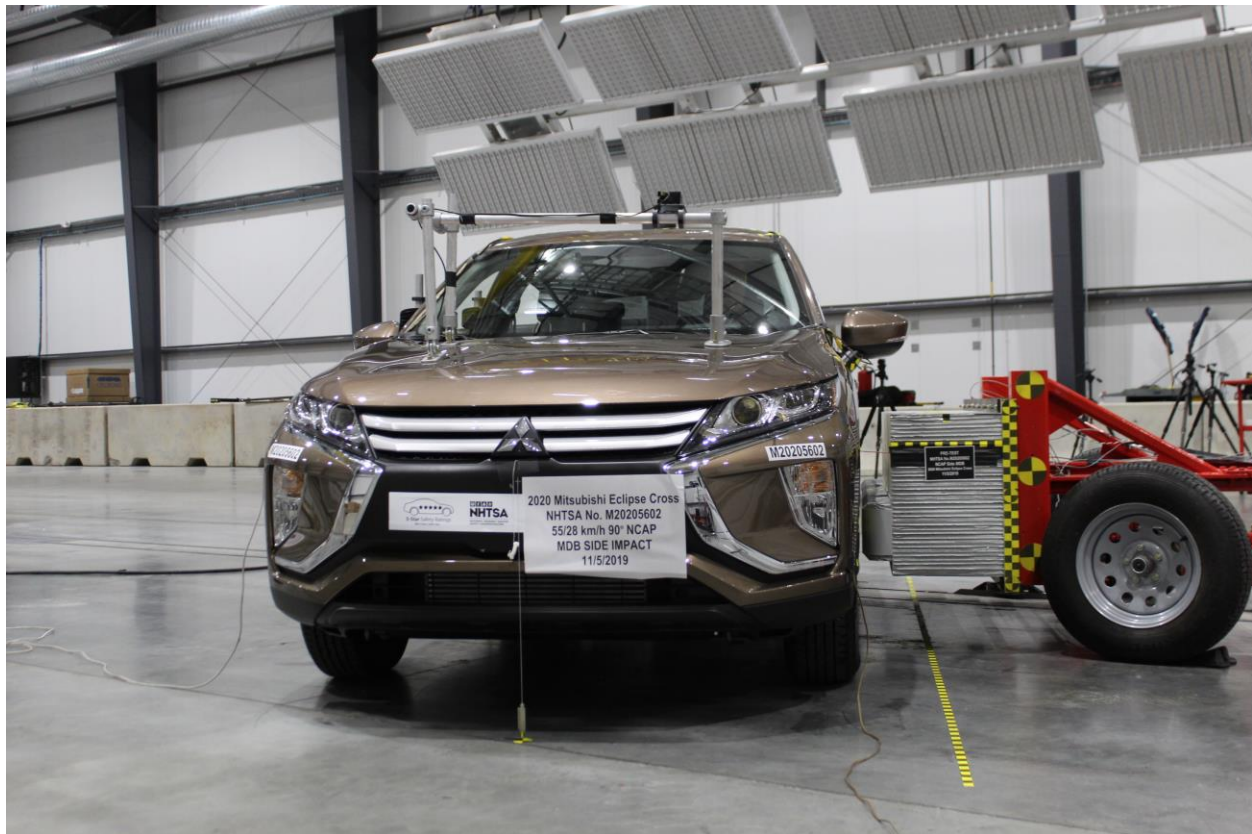

**Figure A-17: Pre-Test Left Side View of MDB Positioned Against Side of Test Vehicle**

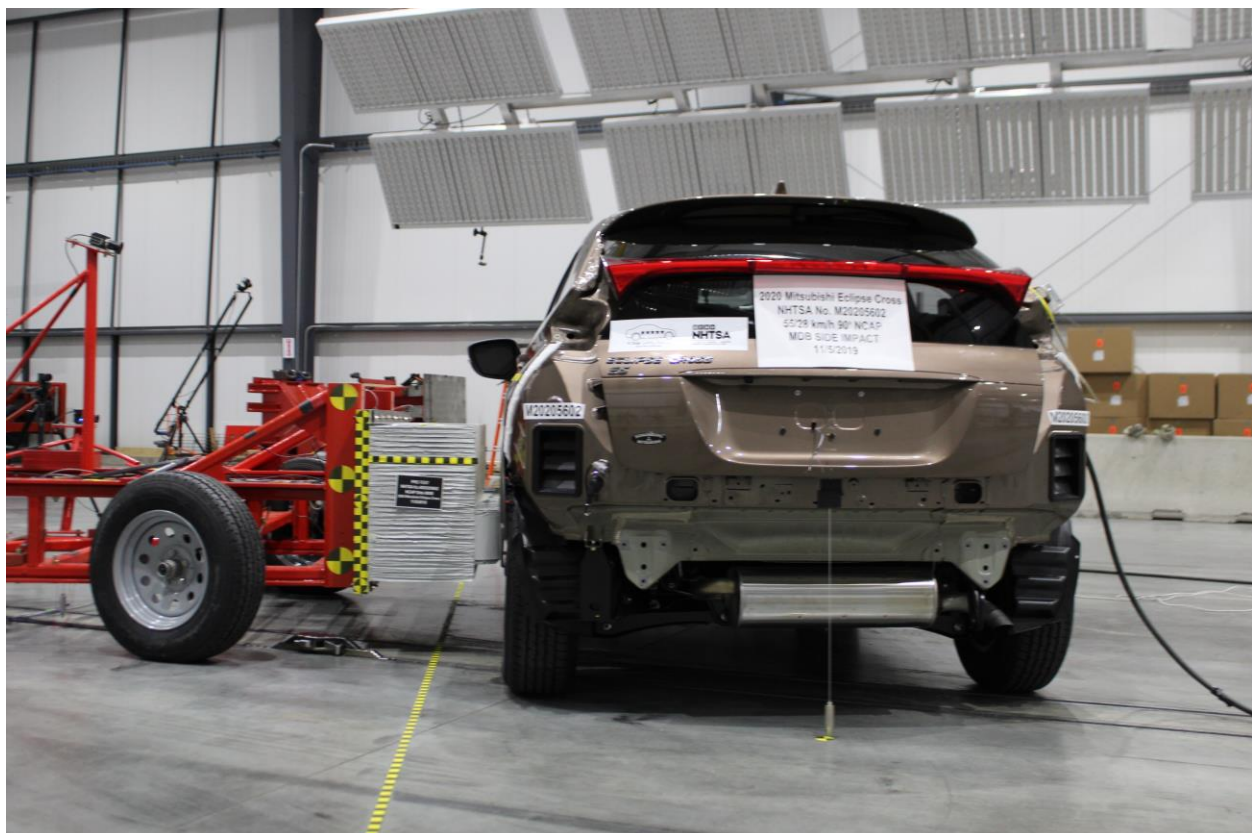

**Figure A-18: Pre-Test Right Side View of MDB Positioned Against Side of Test Vehicle**



Figure A-19: Pre-Test Close-up View of Impact Point Target



Figure A-20: Post-Test Close-up View of Impact Point Target





Figure A-21: Pre-Test Left Front Door Latch Close-Up



Figure A-22: Post-Test Left Front Door Latch Close-Up



Figure A-23: Pre-Test Left Rear Door Latch Close-Up



Figure A-24: Post-Test Left Rear Door Latch Close-Up





**Figure A-25: Pre-Test Front Close-up View of Driver Dummy**



**Figure A-26: Post-Test Front Close-up View of Driver Dummy**





**Figure A-27: Pre-Test Left Side View of Driver Dummy Showing Belt and Chalking**



**Figure A-28: Pre-Test Left Side View of Driver Dummy Shoulder and Door Top View**





**Figure A-29: Post-Test Left Side View of Driver Dummy Shoulder and Door Top View**



**Figure A-30: Pre-Test Frontal View of Driver Seat Back Prior to Dummy Positioning**



**Figure A-31: Pre-Test Frontal View of Driver Dummy Head and Shoulders in Relation to Head Restraint**



**Figure A-32: Pre-Test Frontal View of Driver Seat Pan Prior to Dummy Positioning**





**Figure A-33: Pre-Test Overhead View of Driver Dummy Thighs on Seat Pan**



**Figure A-34: Pre-Test Placement of Driver Dummy's Feet**



**Figure A-35: Pre-Test View of Belt Anchorage for Driver Dummy**



**Figure A-36: Pre-Test Left Side View of Steering Wheel**





**Figure A-37: View of Disengaged Parking Brake**



**Figure A-38: Pre-Test View of Parking Brake**

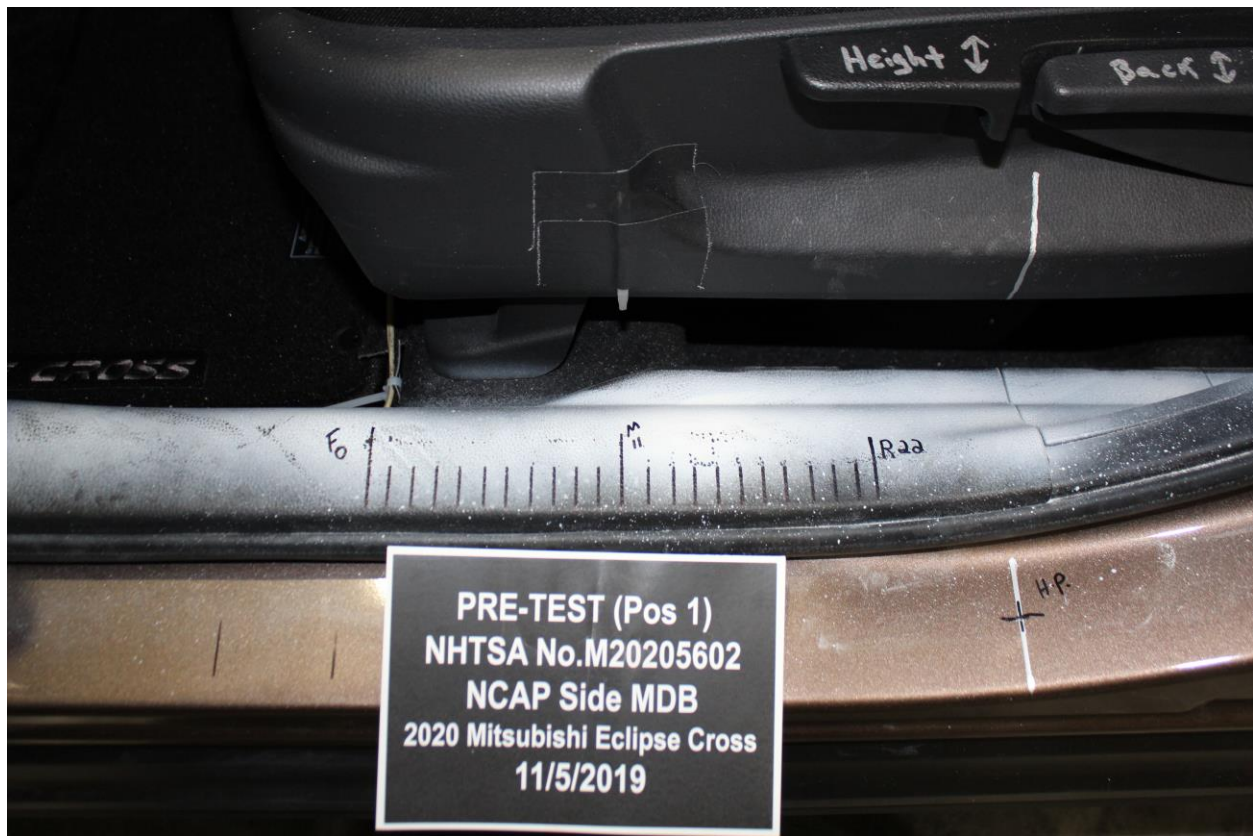


Figure A-39: Pre-test Close-Up Left Side View of Driver Seat Track

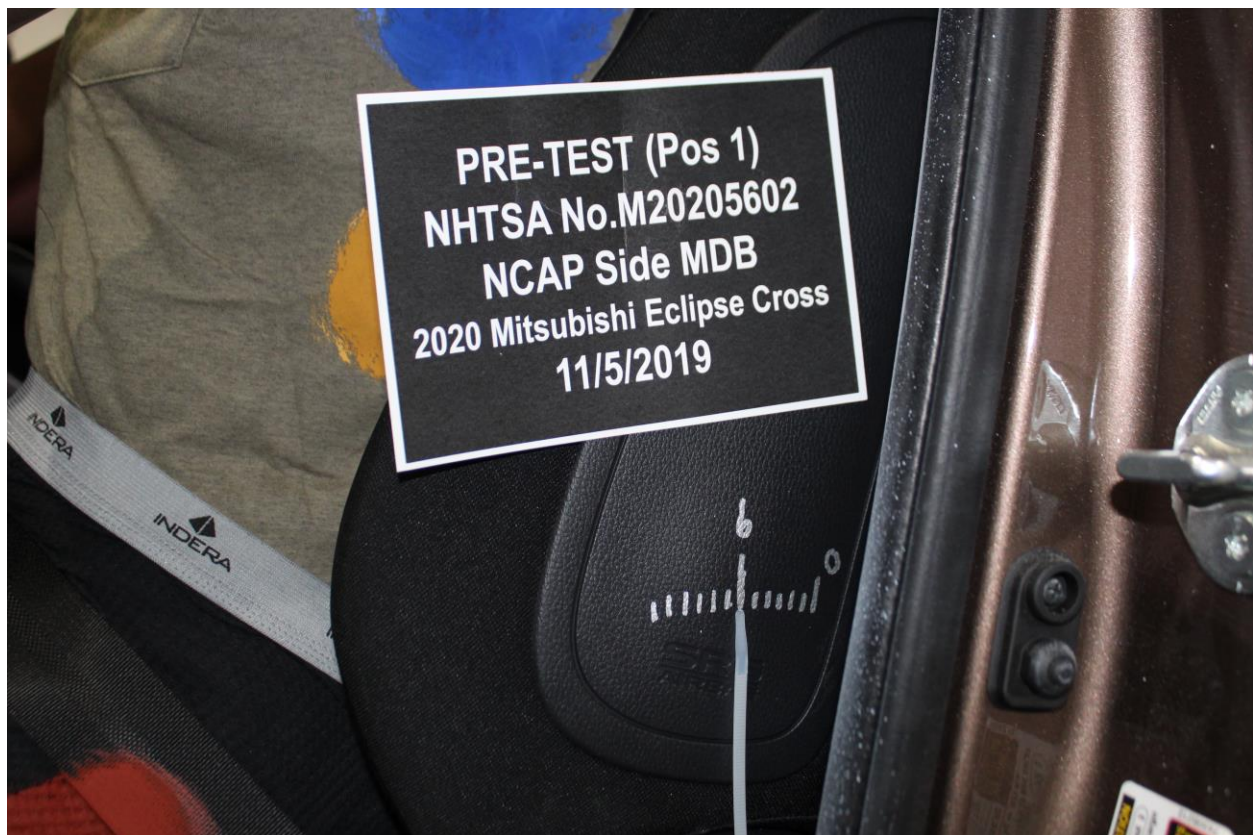


Figure A-40: Pre-Test Close-Up Left Side View of Driver Seat Back





**Figure A-41: Pre-Test Close-Up View of Driver Seat Back or Head Restraint**



**Figure A-42: Pre-Test Driver Dummy and Door Clearance View**





**Figure A-43: Post-Test Driver Dummy and Door Clearance View**




**Figure A-44: Pre-Test Right Side View of Driver Dummy and Front Seat of Occupant Compartment**





**Figure A-45: Post-Test Right Side View of Driver Dummy and Front Seat of Occupant Compartment**

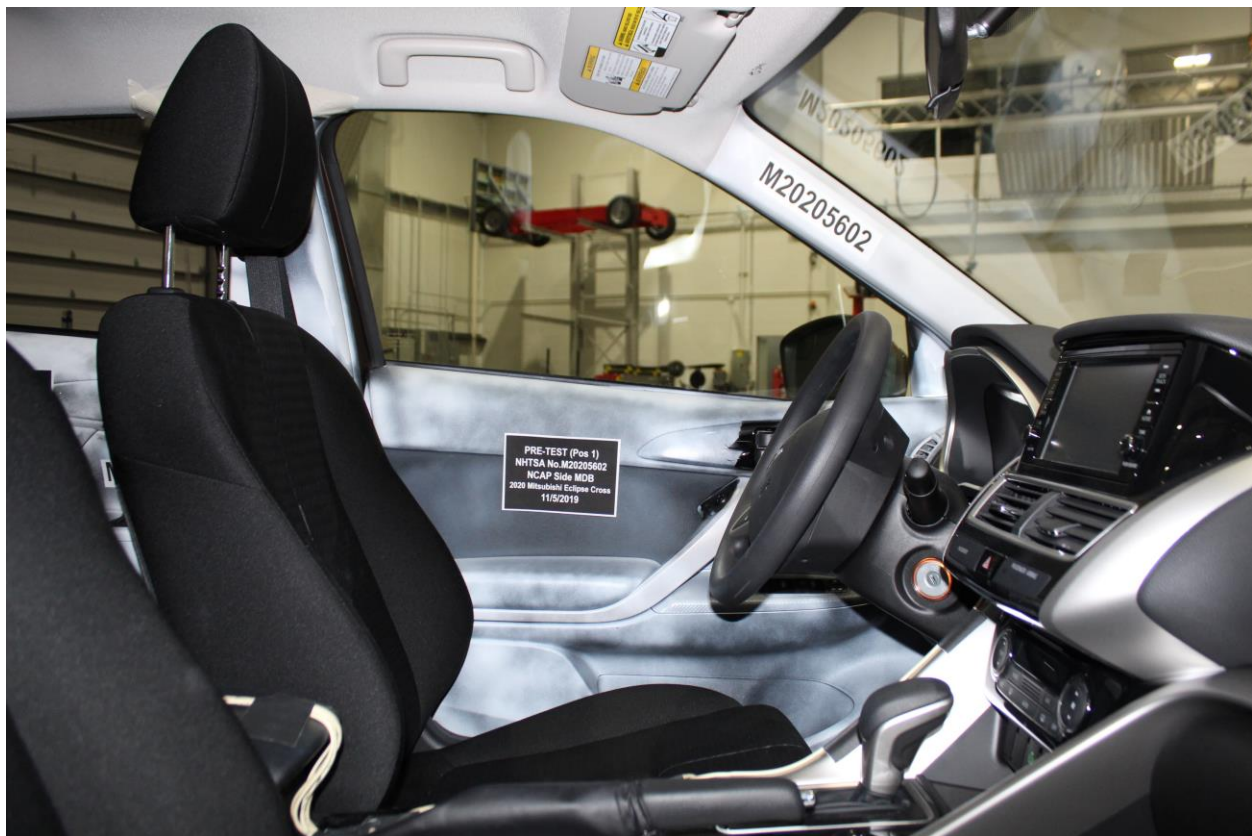

**Figure A-46: Pre-Test Driver Inner Door Panel View**




**Figure A-47: Post-Test Driver Inner Door Panel View Showing Driver Dummy Contact Locations**



**Figure A-48: Post-Test Driver Dummy Close-Up Head Contact with Vehicle View**



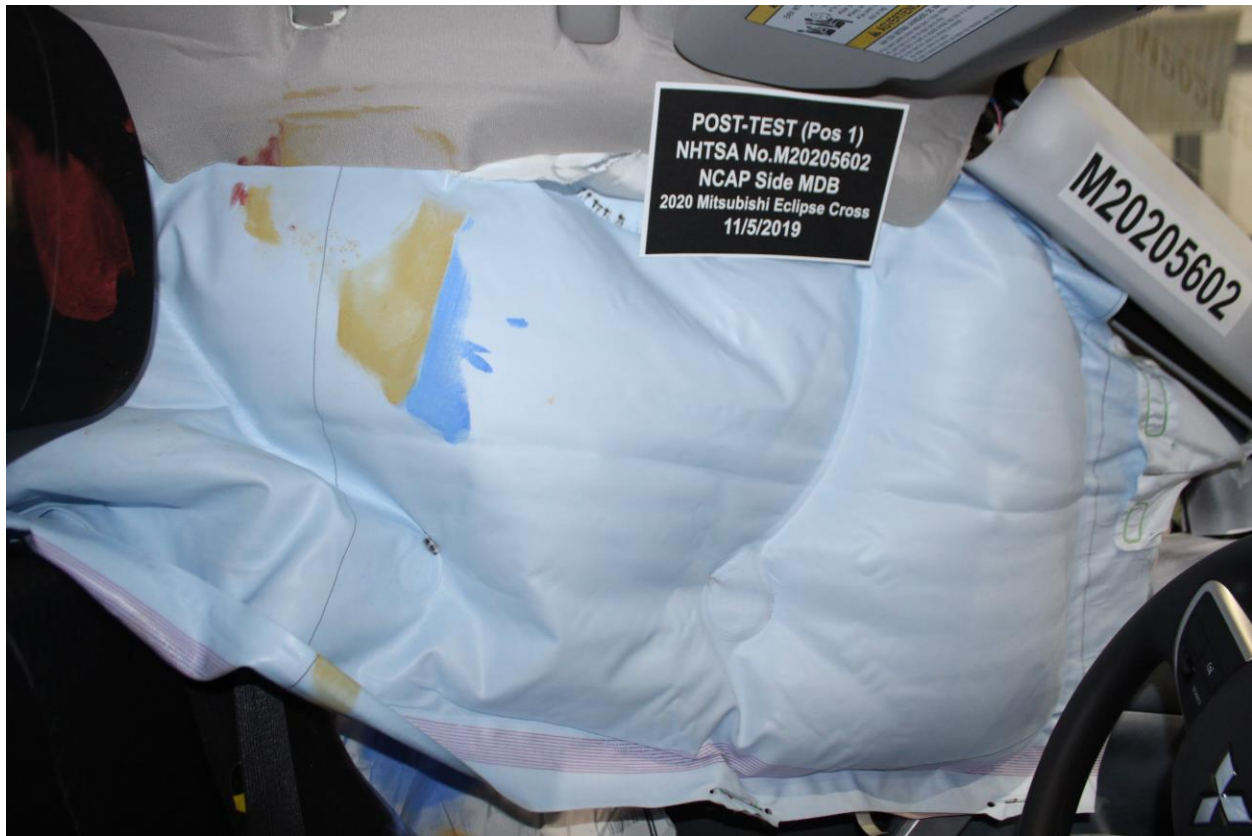

**Figure A-49: Post-Test Driver Dummy Close-Up Head Contact with Side Air bag View**



**Figure A-50: Post-Test Driver Dummy Close-Up Torso Contact with Vehicle Interior View**






**Figure A-51: Post-Test Driver Dummy Close-Up Torso Contact with Side Air bag View**



**Figure A-52: Post-Test Driver Dummy Close-Up Pelvis Contact View**



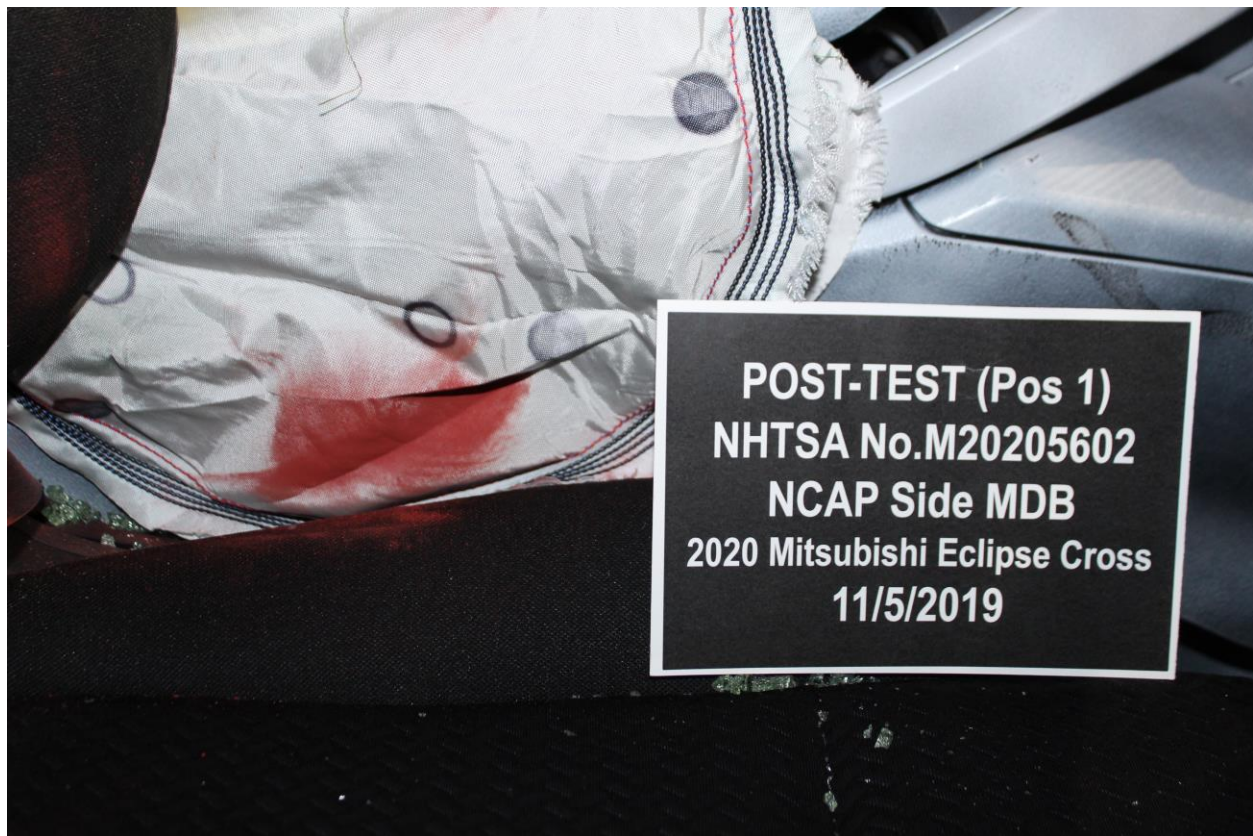

**Figure A-53: Post-Test Driver Dummy Close-Up Pelvis Contact with Side Air bag View**



**Figure A-54: Post-Test Driver Dummy Close-Up Knee Contact View**





**Figure A-55: Pre-Test Left Side View of Rear Passenger Dummy Showing Belt and Chalking**



**Figure A-56: Pre-Test Left Side View of Rear Passenger Dummy Shoulder and Door Top View**




**Figure A-57: Post-Test Left Side View of Rear Passenger Dummy Shoulder and Door Top View**



**Figure A-58: Pre-Test Frontal View of Rear Passenger Seat Back Prior to Dummy Positioning**



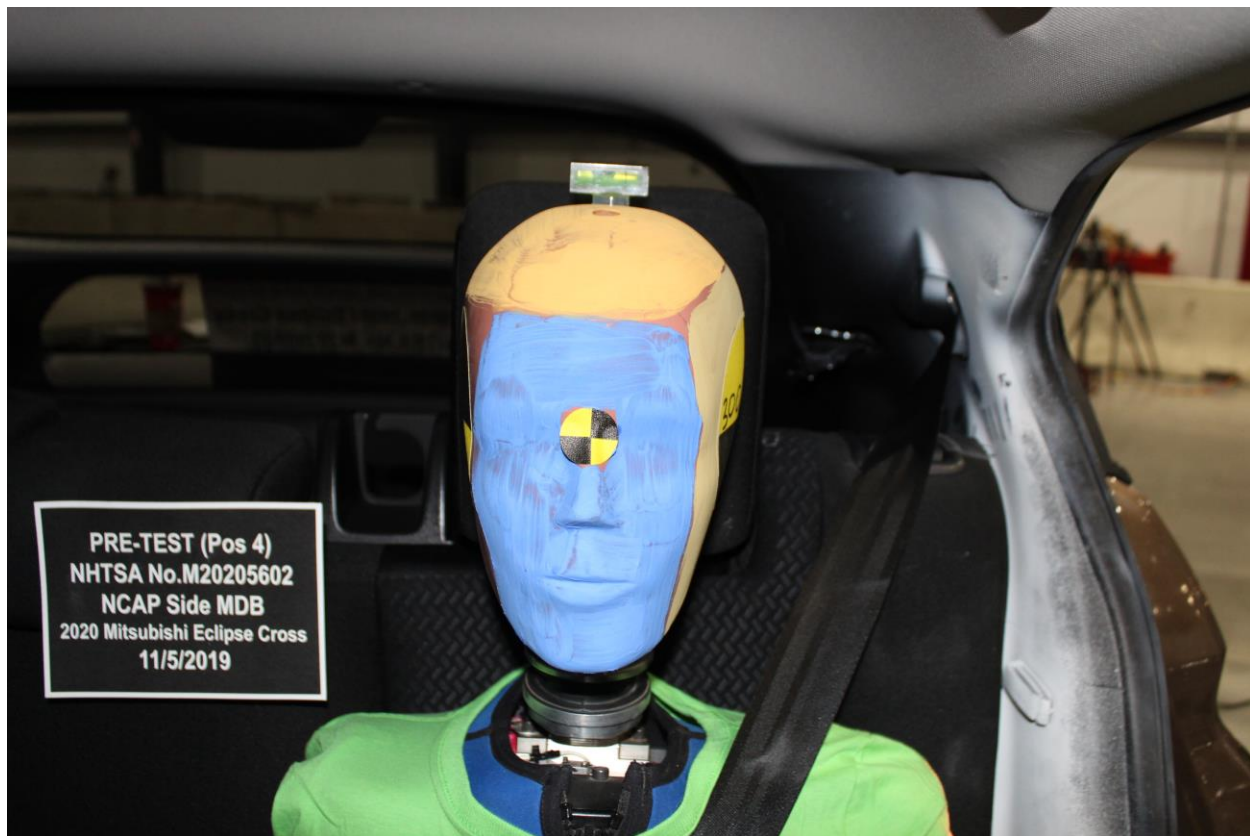


**Figure A-59: Pre-Test Frontal View of Rear Passenger Dummy Head and Shoulders in Relation to Head Restraint**




**Figure A-60: Pre-Test Overhead View of Rear Passenger Seat Pan Prior to Dummy Positioning**



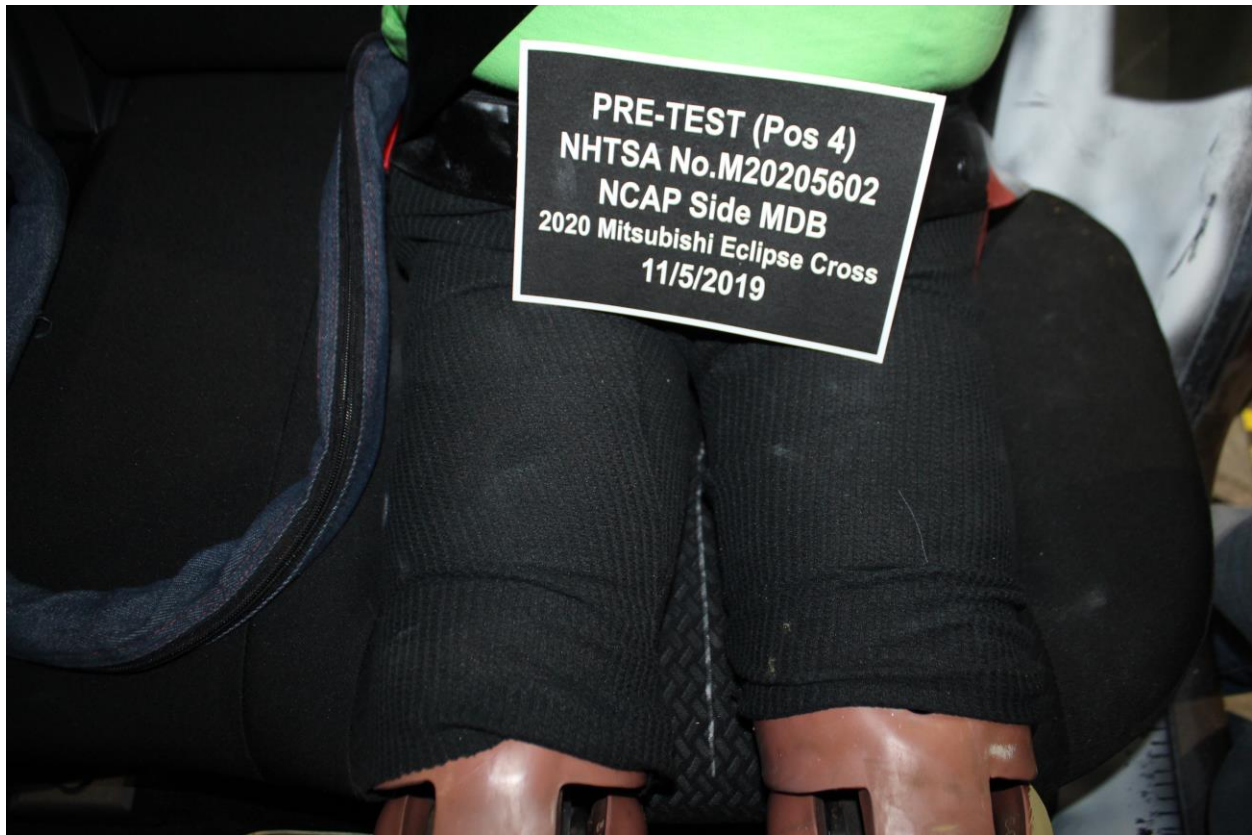

**Figure A-61: Pre-Test Overhead View of Rear Passenger Dummy Thighs on Seat Pan**

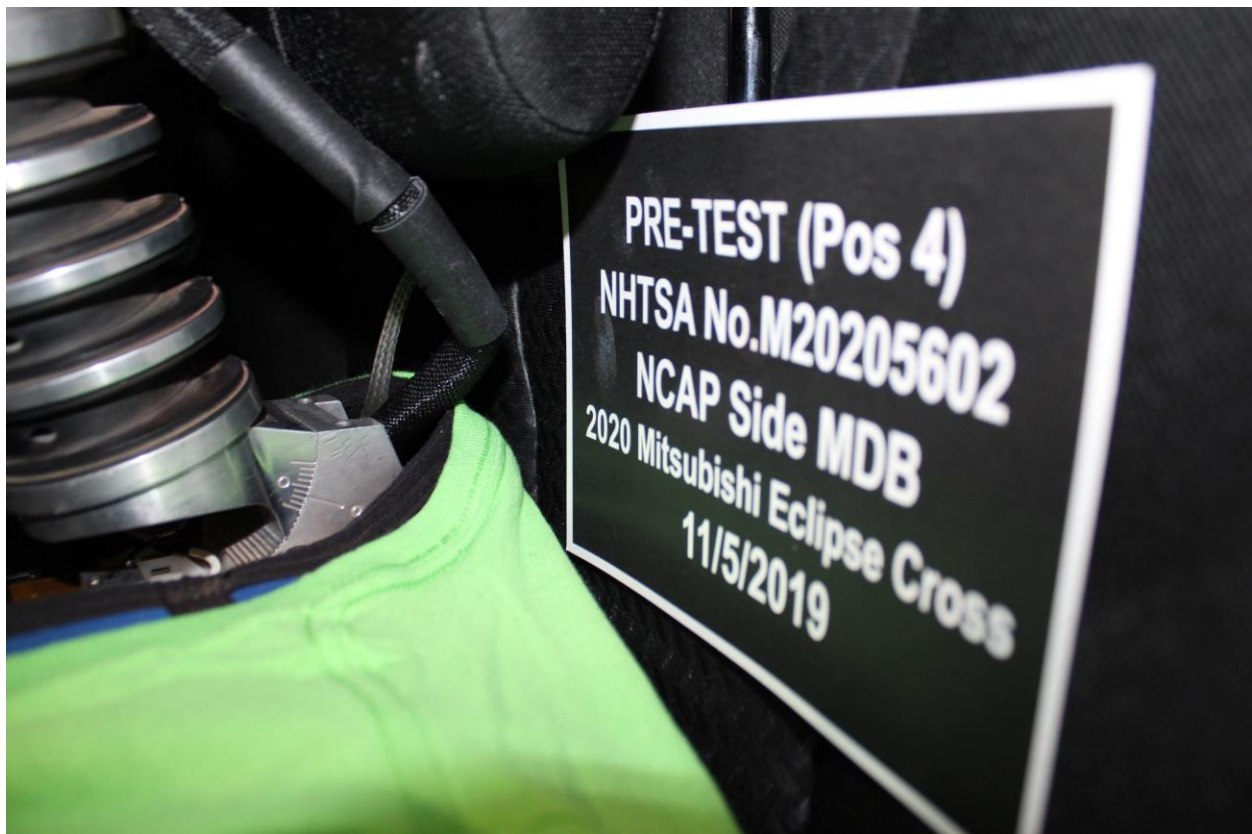

**Figure A-62: Pre-Test View of Rear Passenger Dummy's Neck Showing Position of Adjustable Neck Bracket**



**Figure A-63: Pre-Test View of Rear Passenger Dummy's Head Showing Dummy's Head is Level**



**Figure A-64: Pre-Test Placement of Rear Passenger Dummy's Feet**





**Figure A-65: Pre-Test View of Belt Anchorage for Rear Passenger Dummy**



**Figure A-66: Pre-Test Close-Up Left Side View of Rear Passenger Seat Track**



Figure A-67: Pre-Test Close-Up Left Side View of Rear Passenger Seat Back



Figure A-68: Pre-Test Close-Up View of Rear Passenger Seat Back or Head Restraint





**Figure A-69: Pre-Test Rear Passenger Dummy and Door Clearance View**



**Figure A-70: Post-Test Rear Passenger Dummy and Door Clearance View**





**Figure A-71: Pre-Test Right Side View of Rear Passenger Dummy and Rear Seat Occupant Compartment**



**Figure A-72: Post-Test Right Side View of Rear Passenger Dummy and Rear Seat Occupant Compartment**





**Figure A-73: Pre-Test Rear Passenger Inner Door Panel View**



**Figure A-74: Post-Test Rear Passenger Inner Door Panel View Showing Rear Passenger Dummy Contact Locations**



**Figure A-75: Post-Test Rear Passenger Dummy Close-Up Head Contact with Vehicle View**



**Figure A-76: Post-Test Rear Passenger Dummy Close-Up Head Contact with Side Air bag View**




**Figure A-77: Post-Test Rear Passenger Dummy Close-Up Torso Contact with Vehicle Interior View**

**Photo Not Applicable**

**Figure A-78: Post-Test Rear Passenger Dummy Close-Up Torso Contact with Side Air bag View**



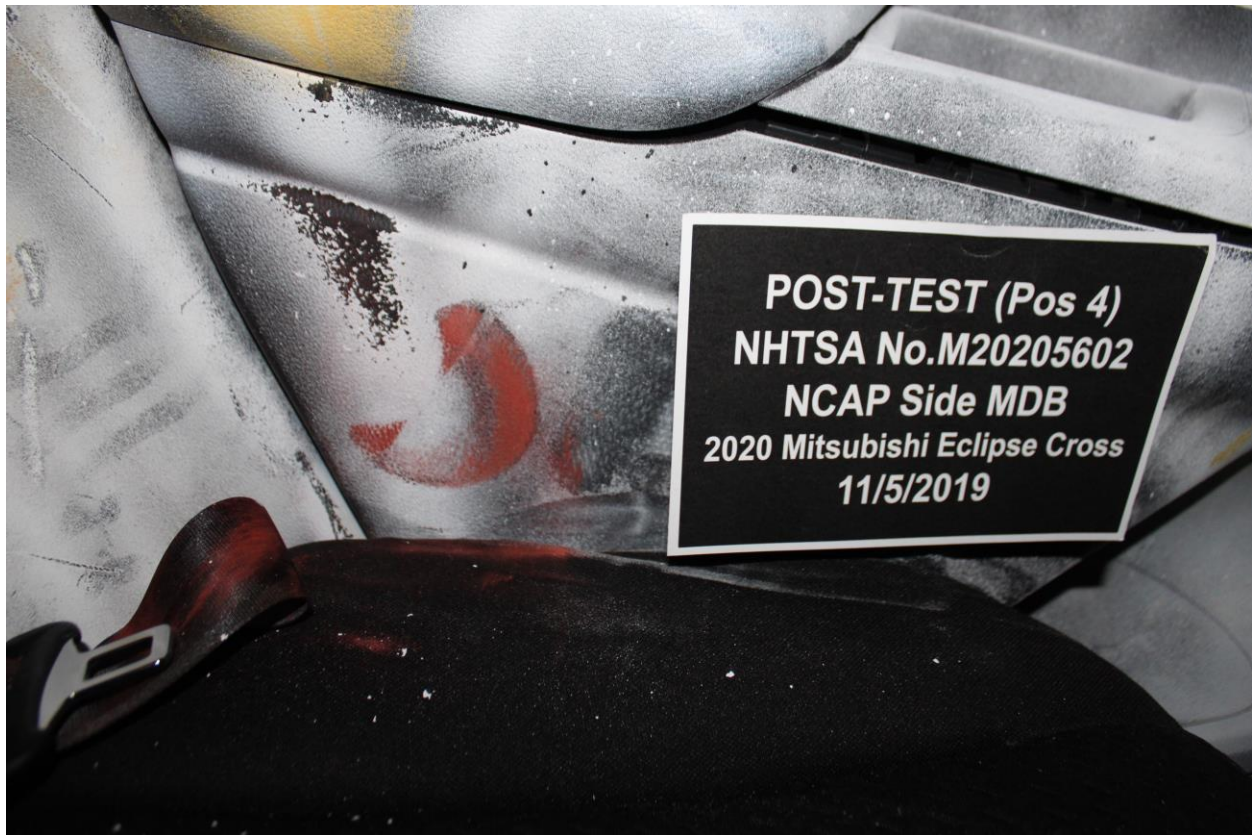

**Figure A-79: Post-Test Rear Passenger Dummy Close-Up Pelvis Contact View**

**Photo Not Applicable**

**Figure A-80: Post-Test Rear Passenger Dummy Close-Up Pelvis Contact with Side Air bag View**






**Figure A-81: Post-Test Rear Passenger Dummy Close-Up Knee Contact View**



**Figure A-82: Pre-Test View of Fuel Filler Cap or Fuel Filler Neck**



**Figure A-83: Post-Test View of Fuel Filler Cap or Fuel Filler Neck**

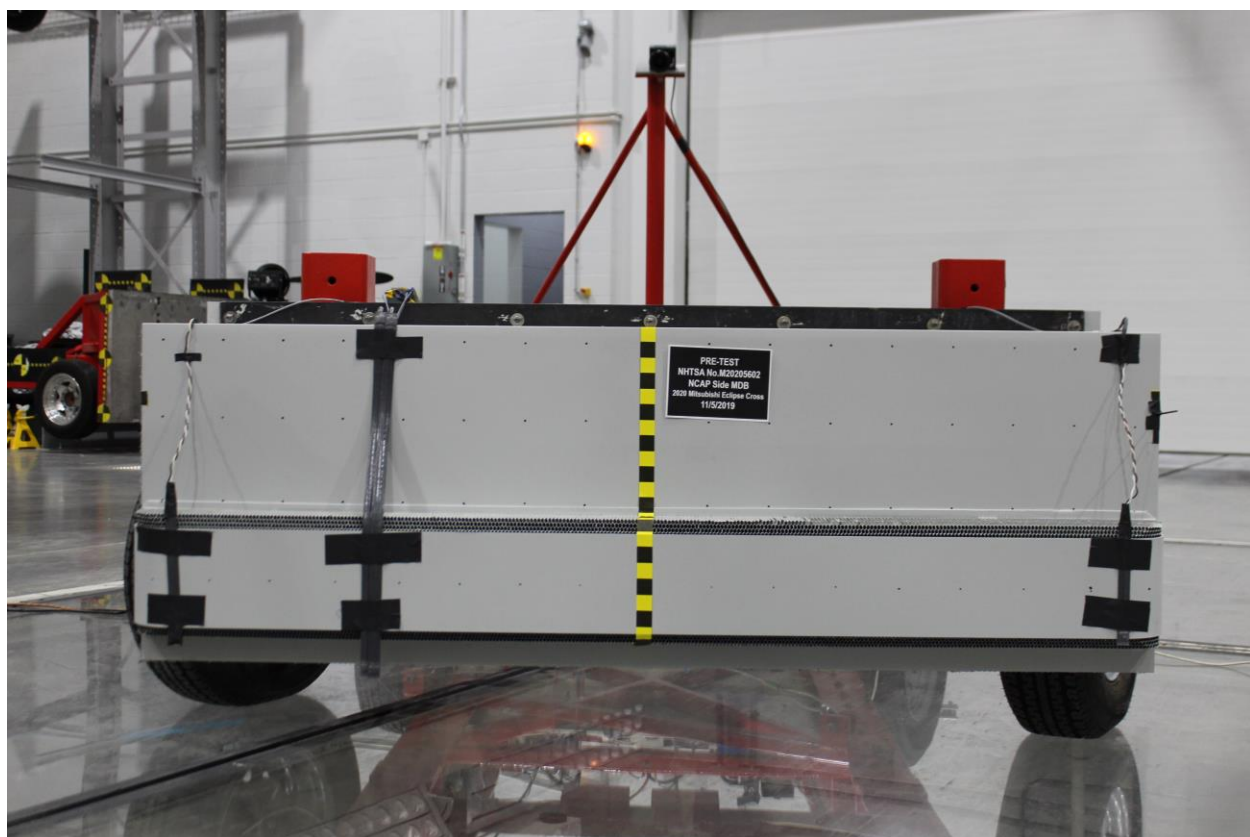

**Figure A-84: Pre-Test Front View of MDB Impactor Face**





**Figure A-85: Post-Test Front View of MDB Impactor Face**



**Figure A-86: Pre-Test Top View of MDB Impactor Face**




**Figure A-87: Post-Test Top View of MDB Impactor Face**



**Figure A-88: Pre-Test Left Side View of MDB Impactor Face**



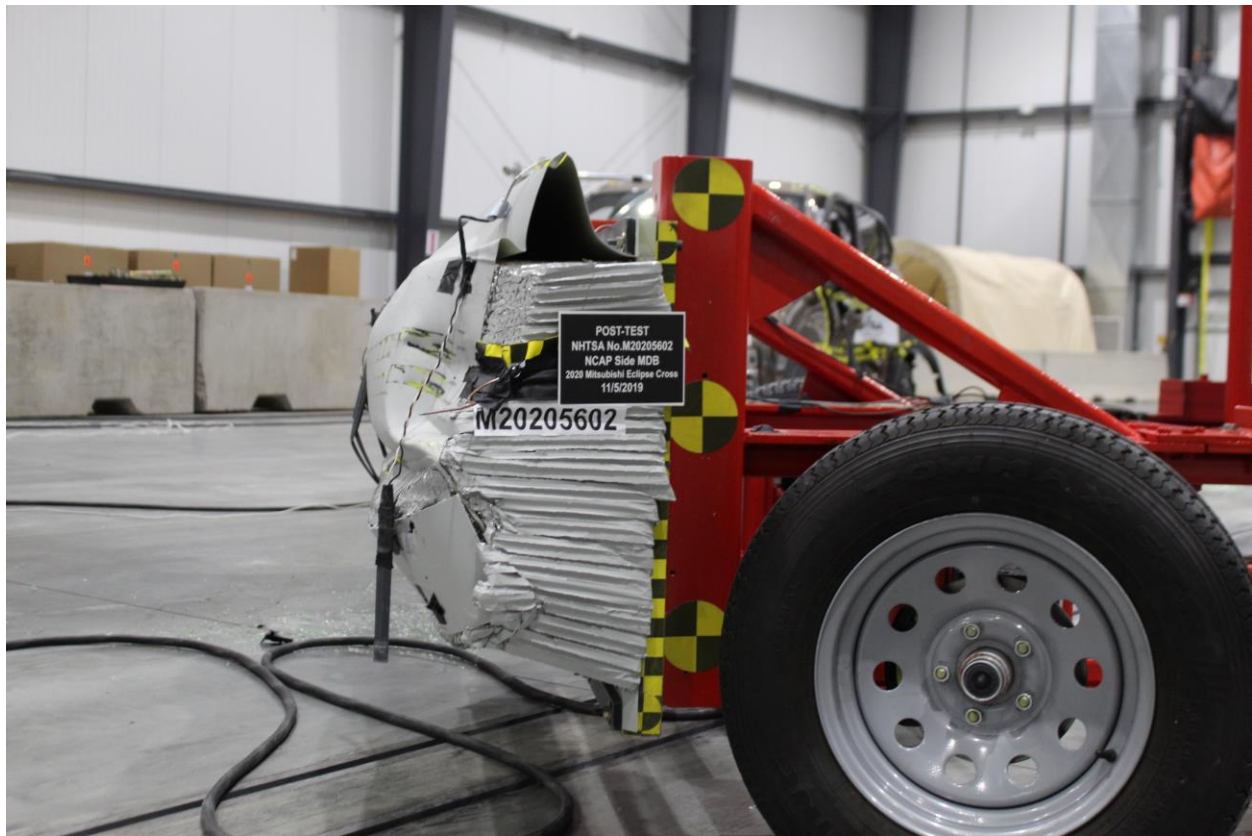

**Figure A-89: Post-Test Left Side View of MDB Impactor Face**



**Figure A-90: Pre-Test Right Side View of MDB Impactor Face**





Figure A-91: Post-Test Right Side View of MDB Impactor Face



Figure A-92: Close-Up View of Vehicle's Certification Label





Figure A-93: Close-Up View of Vehicle's Tire Information Placard or Label

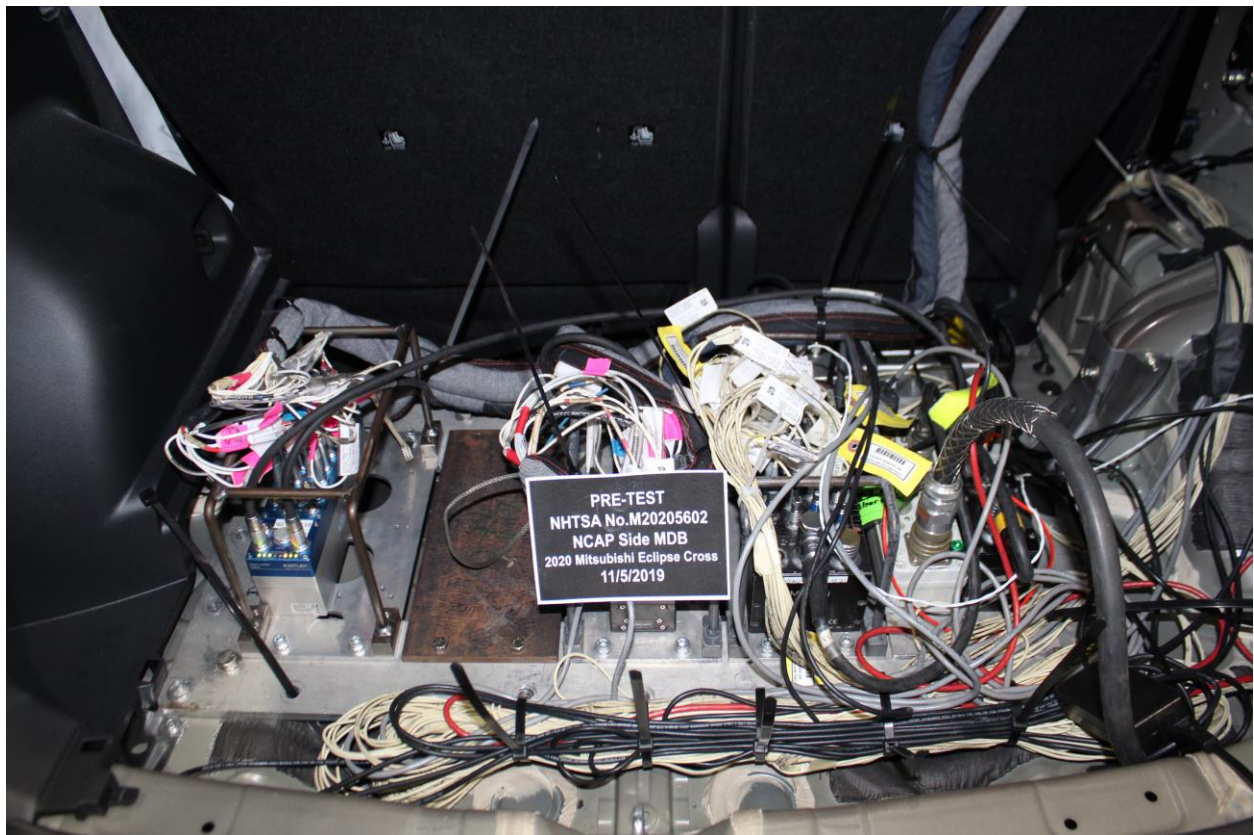


Figure A-94: Pre-Test Ballast View






**Figure A-95: Post-Test Primary and Redundant Speed Trap Read-Out**



**Figure A-96: FMVSS No. 301 Static Rollover 0 Degrees**




**Figure A-97: FMVSS No. 301 Static Rollover 90 Degrees**

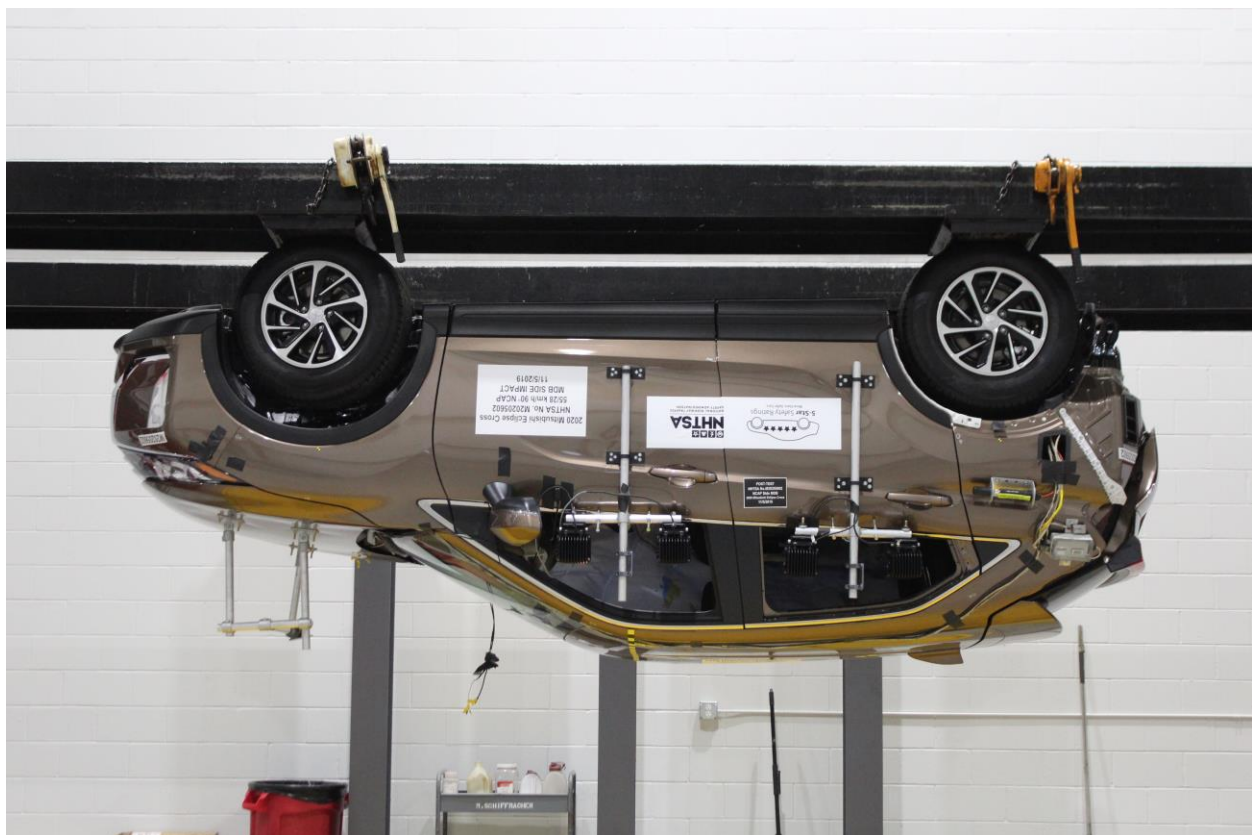

**Figure A-98: FMVSS No. 301 Static Rollover 180 Degrees**



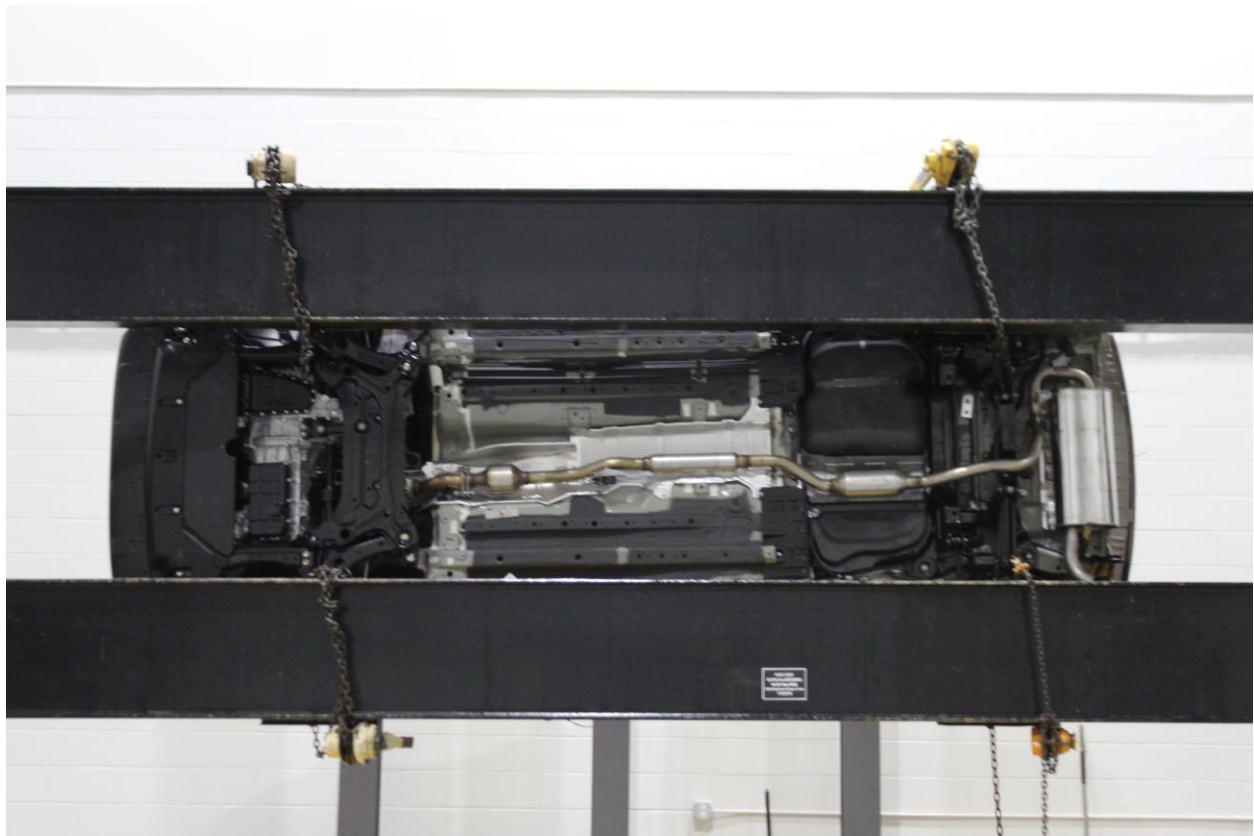

**Figure A-99: FMVSS No. 301 Static Rollover 270 Degrees**



**Figure A-100: FMVSS No. 301 Static Rollover 360 Degrees**





Figure A-101: Impact Event

**2020 ECLIPSE CROSS ES 1.5T ZWD**  
4-DOOR SUV  
BRONZE METALLIC / BLACK

1.5L DIRECT-INJECTION TURBO ENGINE  
CONTINUOUSLY VARIABLE TRANSMISSION  
50-STATE EMISSIONS STANDARD

**Additional Equipment**

Full Tank of Gas	INCLUDED
Accy Carpeted Floor Mats and Portfolio	\$145.00

**Mechanical Features**

- 1.5L MIVEC DOHC 4-cylinder Direct-Injection Turbocharged
- Electric power steering
- Front MacPherson strut suspension with stabilizer bar
- Rear Multi-link suspension with stabilizer bar
- Continuously Variable Transmission (CVT) with 8-step Sport Mode
- Front-Wheel Drive (FWD)
- Active Yaw Control (AYC)

**Exterior Features**

- Halogen headlights
- Fog lights
- LED daytime running lights
- LED tail lights
- LED high-mount stop light
- Chrome side-window molding
- Wheel arch moldings
- Body-colored side mirrors with turn indicators
- Heated power side mirrors
- Front variable intermittent wipers
- Rear intermittent wiper
- Rear window defroster with timer
- Rear privacy glass
- Roof spoiler
- Shark fin antenna
- ES badge
- 16-inch two-tone alloy wheels
- 215/70R16 all-season tires
- Temporary spare tire

**Interior Features**

- High-contrast meters
- Color multi-information display
- Dual sunvisor vanity mirrors
- Sunvisors with extension function
- Front map lights
- Cargo light
- 6-way adjustable driver seat
- 4-way adjustable passenger seat
- Fabric seating surfaces
- 60/40 rear seat folding function with slide and recline adjustments
- Passenger seatback pocket
- Tilt and telescopic steering wheel

**Convenience Features**

- 7.2" display audio
- HD Radio
- Bluetooth® wireless technology
- Steering wheel audio and phone controls
- Front USB port
- Cruise control
- ECO indicator
- ECO mode switch
- Automatic climate control
- Micro air filtration

**Convenience Features (cont'd)**

- Rear heater floor ducts
- Remote keyless entry
- Power windows with driver auto up/down
- 12V power outlets
- Floor console cupholders with illumination
- Front door storage pockets

**Safety & Security**

- Anti-lock Braking System (ABS) with Electronic Brakeforce Distribution (EBD) and brake assist
- Active Stability Control (ASC)
- Hill Start Assist (HSA)
- Tire Pressure Monitoring System (TPMS)
- Advanced dual-stage front airbags
- Driver knee airbag
- Front seat-mounted side airbags
- Side curtain airbags
- LATCH (Lower Anchors and Tethers for Children)
- Child safety rear door locks
- Anti-theft alarm system
- Anti-theft engine immobilizer
- Steel body construction

**MSRP: \$22,845.00**

**Total Additional Equipment: \$145.00**

**Subtotal: \$22,990.00**

**Destination/Handling: \$1,095.00**

**Total MSRP: \$24,085.00**

(MSRP Manufacturer's Suggested Retail Price)

**Fuel Economy and Environment**

**Fuel Economy**

**27 MPG**  
combined city/hwy

26 city 29 highway

3.7 gallons per 100 miles

**You Save \$0**  
in fuel costs over 5 years compared to the average new vehicle.

**Annual fuel Cost \$1,500**

**Fuel Economy & Greenhouse Gas Rating** (tailpipe only)

1 6 10 Best

This vehicle emits 327 grams CO<sub>2</sub> per mile. The best emits 0 grams per mile (tailpipe only). Producing and distributing fuel also create emissions. Learn more at [fuelconomy.gov](http://fuelconomy.gov).

**Smog Rating** (tailpipe only)

1 5 10 Best

This vehicle emits 327 grams CO<sub>2</sub> per mile. The best emits 0 grams per mile (tailpipe only). Producing and distributing fuel also create emissions. Learn more at [fuelconomy.gov](http://fuelconomy.gov).

**Actual results will vary for many reasons, including driving conditions and how you drive and maintain your vehicle. The average new vehicle gets 27 MPG and costs \$7,500 to fuel over 5 years. Cost estimates are based on 15,000 miles per year at \$2.70 per gallon. MPG is miles per gallon equivalent. Vehicle emissions are a significant cause of climate change and smog.**

**fuelconomy.gov**  
Calculate personalized estimates and compare vehicles

**10-year LIMITED POWERTRAIN WARRANTY**

100,000-mile

10"/100,000" 7"/100,000"

POWERTRAIN ANTI-CORROSION/PERFORATION

5"/60,000" 5"/UNLIMITED"

NEW EXCEPT LIMITED WARRANTY ROADSIDE ASSISTANCE

\*The participating Dealer for Limited Warranty and Roadside Assistance service and location.

**GOVERNMENT 5-STAR SAFETY RATINGS**

This vehicle has not been rated by the government for overall vehicle score, frontal crash, side crash, or rollover risk.

Source: National Highway Traffic Safety Administration (NHTSA).  
[www.safercar.gov](http://www.safercar.gov) or 1-888-327-4236

**Parts Content Information**

For vehicles in this carline:

U.S./Canadian Parts Content: 6%

Major Sources of Foreign Parts Content: JAPAN 97%

For this vehicle:

Final Assembly Point: OKAZAKI, JAPAN

Country of Origin: JAPAN

Engine: JAPAN

Transmission: JAPAN

Note: Parts content does not include final assembly, distribution, or other non-parts costs.

**Mitsubishi Motors Logo**

**Ship To: (DBA) JOHN AMATO MITSUBISHI**  
49050 8380 N. 74TH STREET  
MILWAUKEE, WI 53223

**Sold To: (Same unless indicated)**

**Method of Transport: RAIL**  
Plant/Port of Entry: TACOMA, WA

**VIN: JA4AS3AA7LZ005567**  
Route Code: R30

**Gasoline, license and title fees, applicable federal, state and local taxes and dealer and distributor installed options and accessories are not included in the manufacturer's suggested retail price. This label has been applied to this vehicle pursuant to federal law and cannot be moved or altered prior to delivery to the ultimate purchaser.**

Figure A-102: Monroney Label


## Head restraints

### Adjustment of the head restraint height

#### 4 Front seats and rear outboard seats


To reduce the risk of injury in an accident, adjust the head restraint height so that the center of the restraint is at your ear level when seated. Any person too tall for the restraint to reach their ear level when seated should raise the restraint to the highest locked position.

- To raise the head restraint, pull it straight up.
- To lower the restraint, push down on it while pressing the lock knob (A) in the direction shown by the arrow.
- After adjusting the height, push down on the restraint to make sure it is locked in position.



#### Rear outboard seats


To raise the head restraint, move it upward, and then push the bottom of the restraint rearward.



#### Rear center seat

To reduce the risk of injury in an accident, pull up the head restraint to the locked position.

- To raise the head restraint, move it upward.
- After adjustment, push the head restraint downward and make sure that it is locked.
- To lower the restraint, move it downward while pushing the height adjusting knob (A) in the direction of the arrow.



4-10 Seat and restraint systems

**Figure A-103: Driver Head Restraint Use and Adjustment Information from Vehicle Owner's Manual**


## Head restraints

### Adjustment of the head restraint height

#### 4 Front seats and rear outboard seats


To reduce the risk of injury in an accident, adjust the head restraint height so that the center of the restraint is at your ear level when seated. Any person too tall for the restraint to reach their ear level when seated should raise the restraint to the highest locked position.

- To raise the head restraint, pull it straight up.
- To lower the restraint, push down on it while pressing the lock knob (A) in the direction shown by the arrow.
- After adjusting the height, push down on the restraint to make sure it is locked in position.



#### Rear outboard seats


To raise the head restraint, move it upward, and then push the bottom of the restraint rearward.



#### Rear center seat

To reduce the risk of injury in an accident, pull up the head restraint to the locked position.

- To raise the head restraint, move it upward.
- After adjustment, push the head restraint downward and make sure that it is locked.
- To lower the restraint, move it downward while pushing the height adjusting knob (A) in the direction of the arrow.



4-10 Seat and restraint systems

**Figure A-104: Left Rear Passenger Head Restraint Use and Adjustment Information from Vehicle Owner's Manual-Rear Restraints Not Adjustable**

## **APPENDIX B**

### VEHICLE AND DUMMY RESPONSE DATA PLOTS



## TABLE OF DATA PLOTS

### Driver & Passenger Dummy Instrumentation Plots

Fig.	Description	Page
1	Driver Head Acceleration (X) Primary vs. Time	B-5
2	Driver Head Acceleration (Y) Primary vs. Time	B-5
3	Driver Head Acceleration (Z) Primary vs. Time	B-5
4	Driver Head Resultant Acceleration Primary vs. Time	B-5
5	Driver Upper Thorax Rib Deflection (Y) vs. Time	B-6
6	Driver Middle Thorax Rib Deflection (Y) vs. Time	B-6
7	Driver Lower Thorax Rib Deflection (Y) vs. Time	B-6
8	Driver Thorax Rib Deflection Maximum vs. Time	B-6
9	Driver Anterior Abdominal Force (Y) vs. Time	B-7
10	Driver Middle Abdominal Force (Y) vs. Time	B-7
11	Driver Posterior Abdominal Force (Y) vs. Time	B-7
12	Driver Total Abdominal Force (Y) vs. Time	B-7
13	Driver Pubic Symphysis Force (Y) vs. Time	B-8
14	Passenger Head Acceleration (X) vs. Time Primary	B-8
15	Passenger Head Acceleration (Y) vs. Time Primary	B-8
16	Passenger Head Acceleration (Z) vs. Time Primary	B-8
17	Passenger Head Resultant Acceleration Primary vs. Time	B-9
18	Passenger Lower Spine T12 Acceleration (X) vs. Time	B-9
19	Passenger Lower Spine T12 Acceleration (Y) vs. Time	B-9
20	Passenger Lower Spine T12 Acceleration (Z) vs. Time	B-9
21	Passenger Lower Spine T12 Resultant Acceleration vs. Time	B-10
22	Passenger Iliac Force on Impact Side (Y) vs. Time	B-10
23	Passenger Acetabulum Force on Impact Side (Y) vs. Time	B-10
24	Passenger Total Pelvic Force on Impact Side (Y) vs. Time	B-10

The following additional data for this test can be obtained from the Research and Development section of the NHTSA website. The website can be found at [www.NHTSA.gov](http://www.NHTSA.gov).

#### **Additional Driver & Passenger Dummy Instrumentation Data**

Driver Lower Spine T12 Acceleration (X)  
Driver Lower Spine T12 Acceleration (Y)  
Driver Lower Spine T12 Acceleration (Z)  
Passenger Upper Thorax Rib Deflection (Y)  
Passenger Middle Thorax Rib Deflection (Y)  
Passenger Lower Thorax Rib Deflection (Y)  
Passenger Upper Abdomen Rib Deflection (Y)  
Passenger Lower Abdomen Rib Deflection (Y)  
Driver Head Acceleration Redundant (X)  
Driver Head Acceleration Redundant (Y)  
Driver Head Acceleration Redundant (Z)  
Passenger Head Acceleration Redundant (X)  
Passenger Head Acceleration Redundant (Y)  
Passenger Head Acceleration Redundant (Z)





#### **Vehicle Instrumentation Data**





Vehicle Center of Gravity Acceleration (X)  
Vehicle Center of Gravity Acceleration (Y)  
Vehicle Center of Gravity Acceleration (Z)  
Right Side Sill at Front Seat Acceleration (X)  
Right Side Sill at Front Seat Acceleration (Y)  
Right Side Sill at Front Seat Acceleration (Z)  
Right Side Sill at Rear Seat Acceleration (X)  
Right Side Sill at Rear Seat Acceleration (Y)  
Right Side Sill at Rear Seat Acceleration (Z)  
Left Side Sill at Front Seat Acceleration (Y)  
Left Side Sill at Rear Seat Acceleration (Y)  
Lower A-Post Acceleration (Y)  
Middle A-Post Acceleration (Y)  
Lower B-Post Acceleration (Y)  
Middle B-Post Acceleration (Y)  
Front Seat Track Acceleration (Y)  
Rear Seat Structure Acceleration (Y)  
Right Rear Occupant Compartment Acceleration (Y)  
Engine Block (X)  
Engine Block (Y)  
Rear Floorpan Above Axle Acceleration (X)  
Rear Floorpan Above Axle Acceleration (Y)  
Rear Floorpan Above Axle Acceleration (Z)





### **MDB Instrumentation Data**

MDB Center of Gravity Acceleration (X)  
MDB Center of Gravity Acceleration (Y)  
MDB Center of Gravity Acceleration (Z)  
MDB Rear Acceleration (X)  
MDB Rear Acceleration (Y)  
Left MDB Contact Switch  
Right MDB Contact Switch







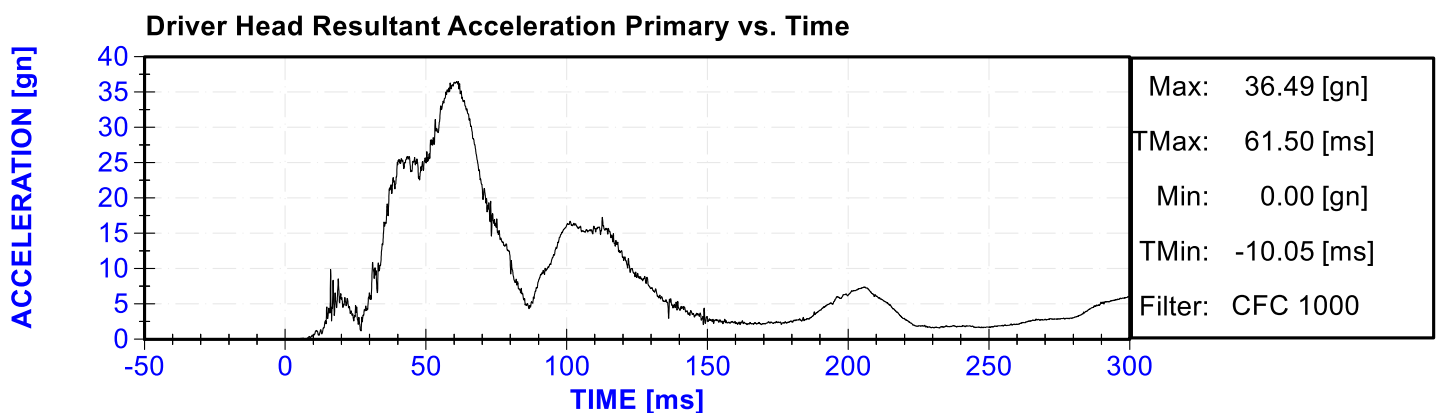
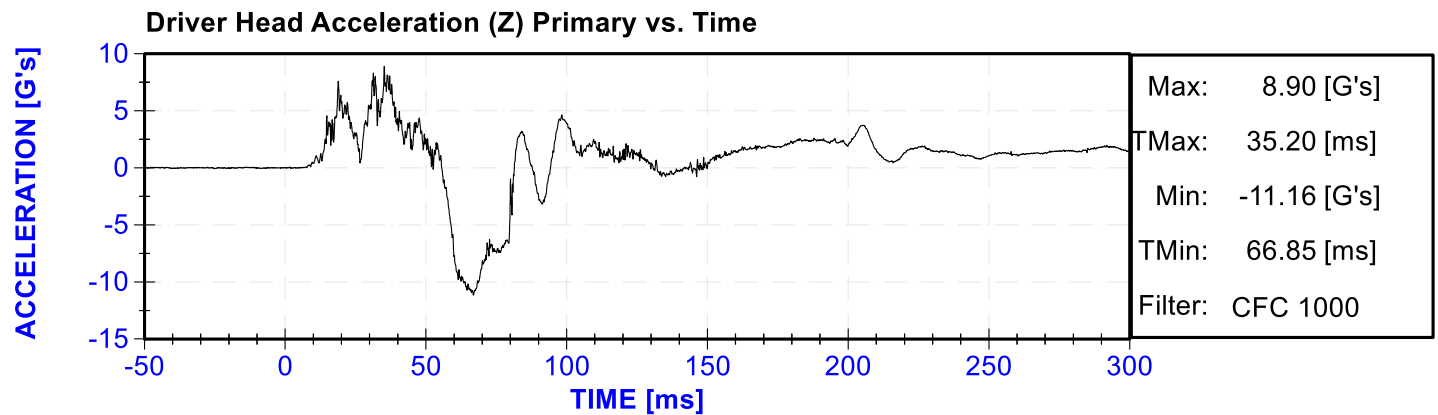
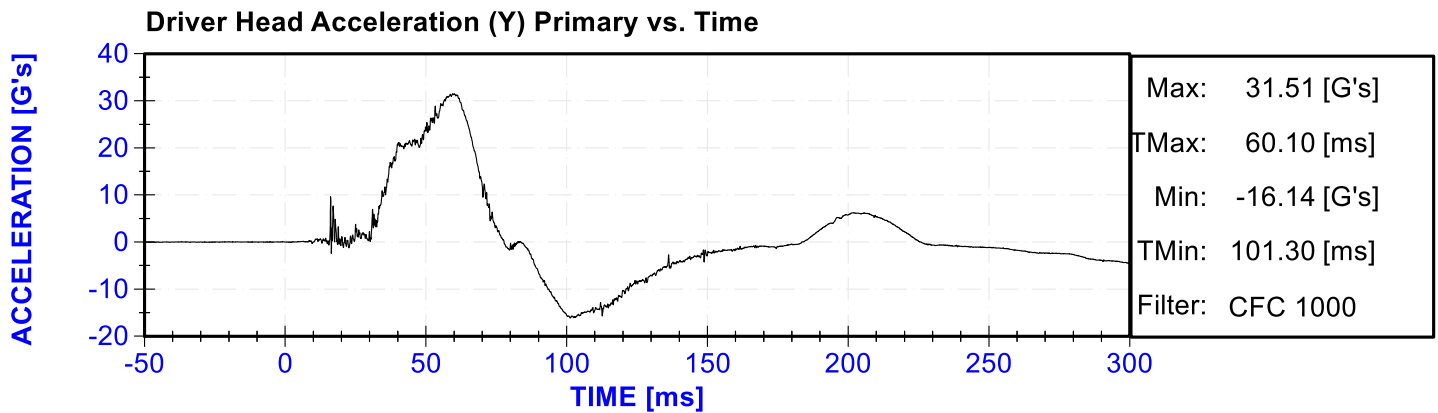
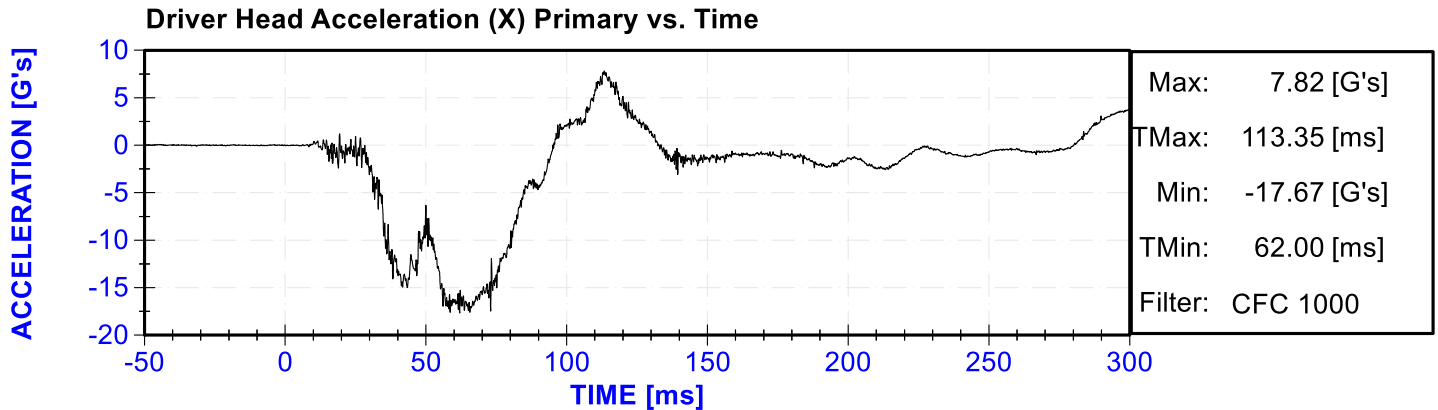


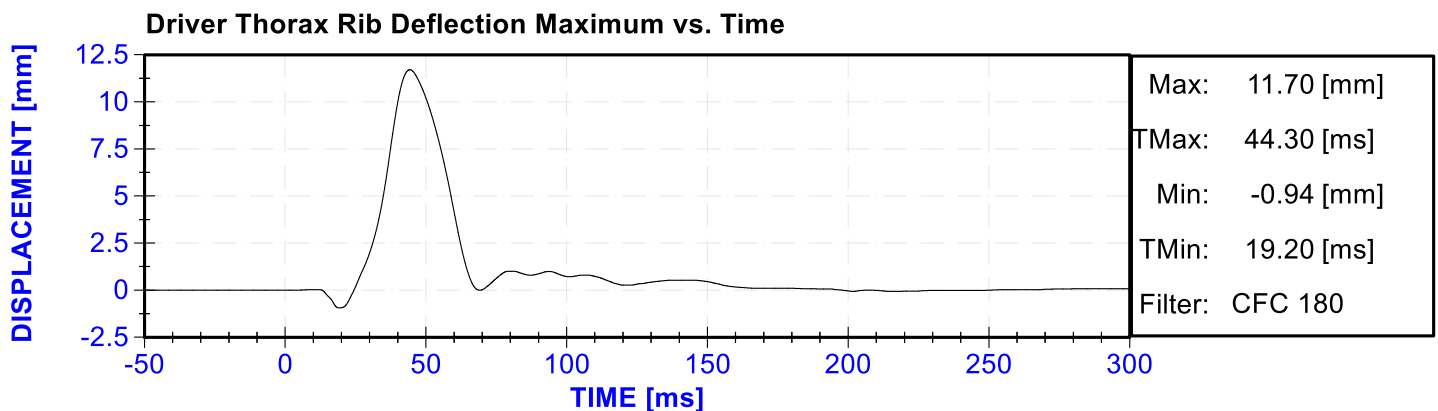
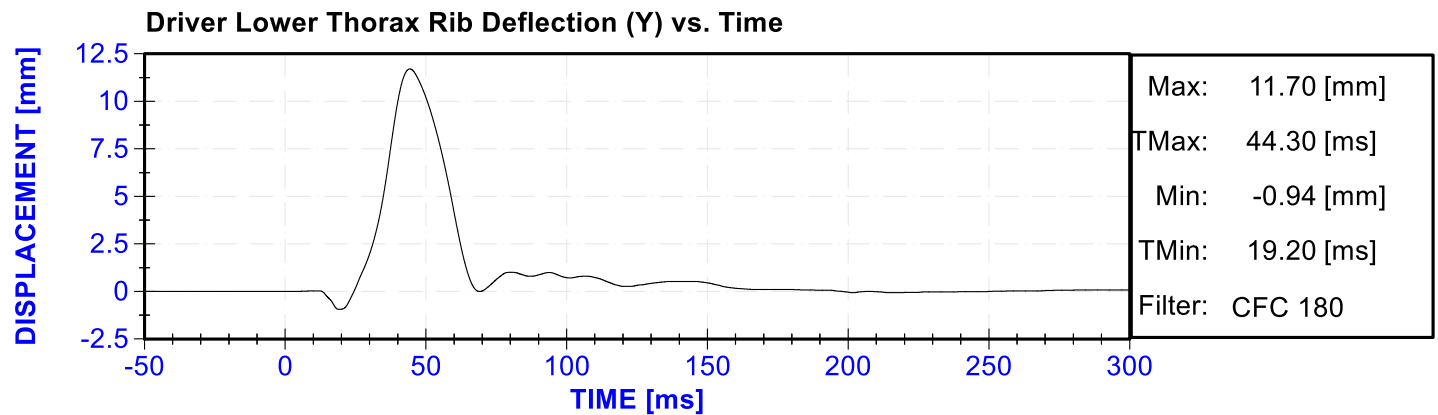
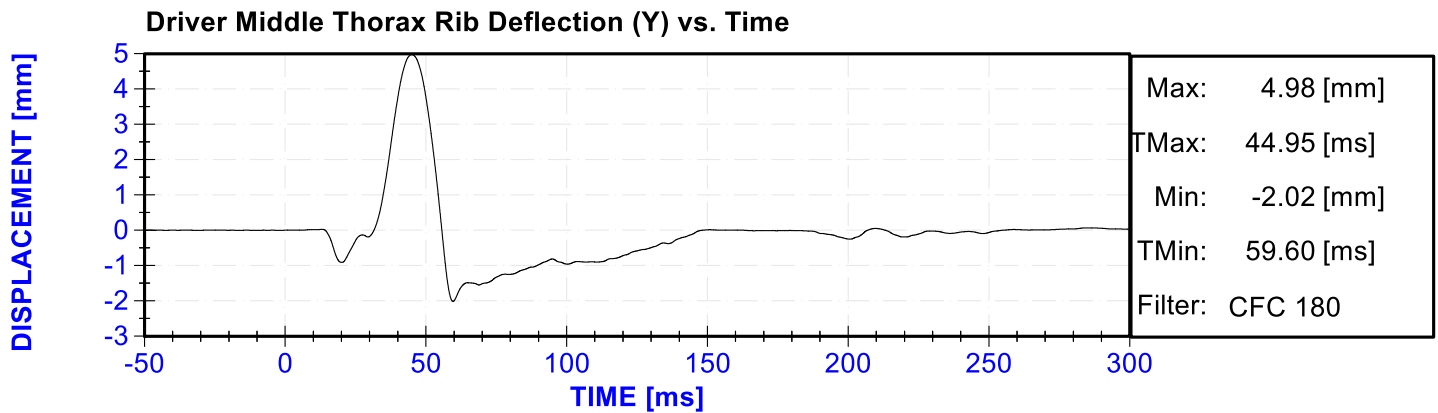
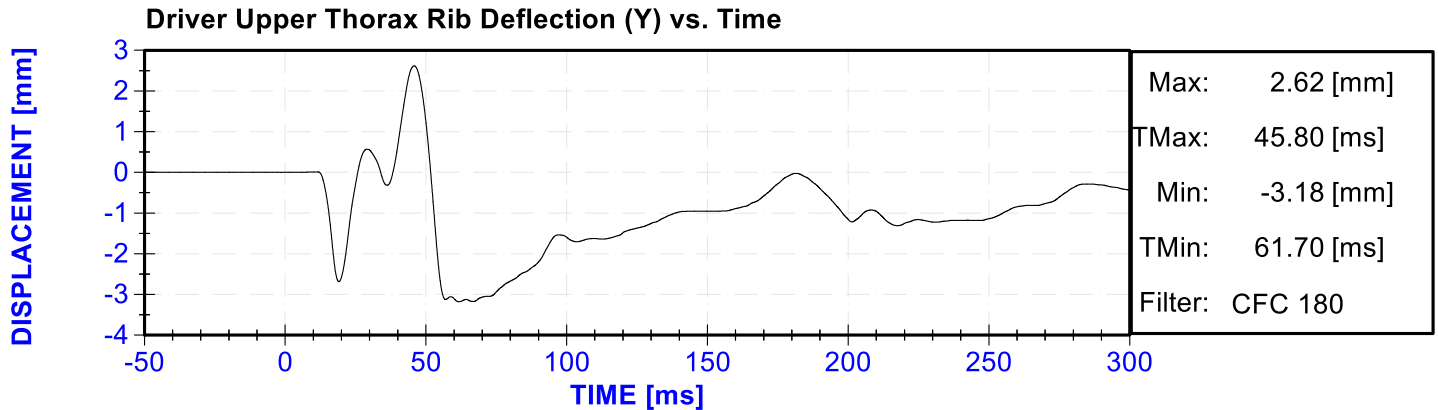


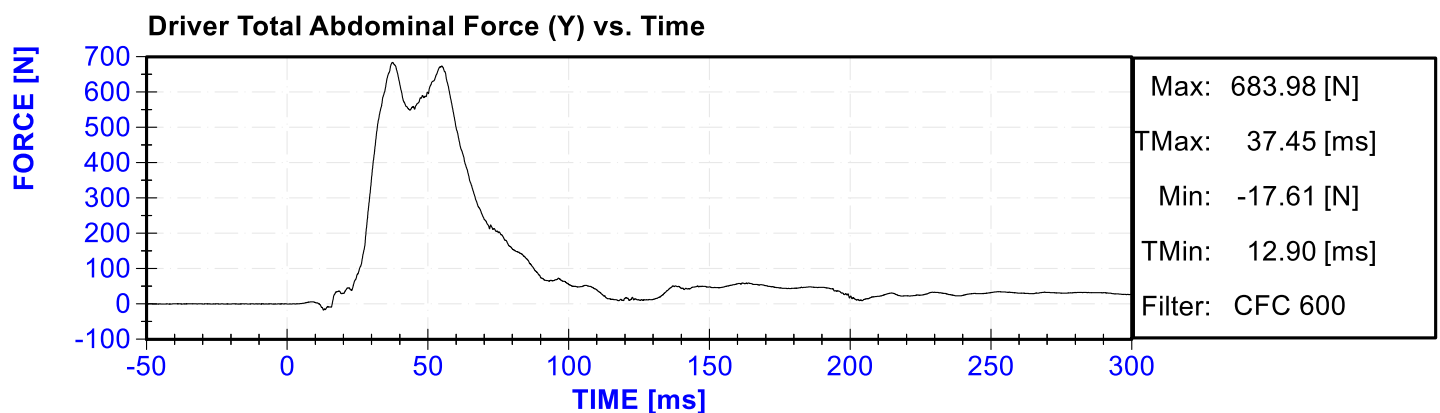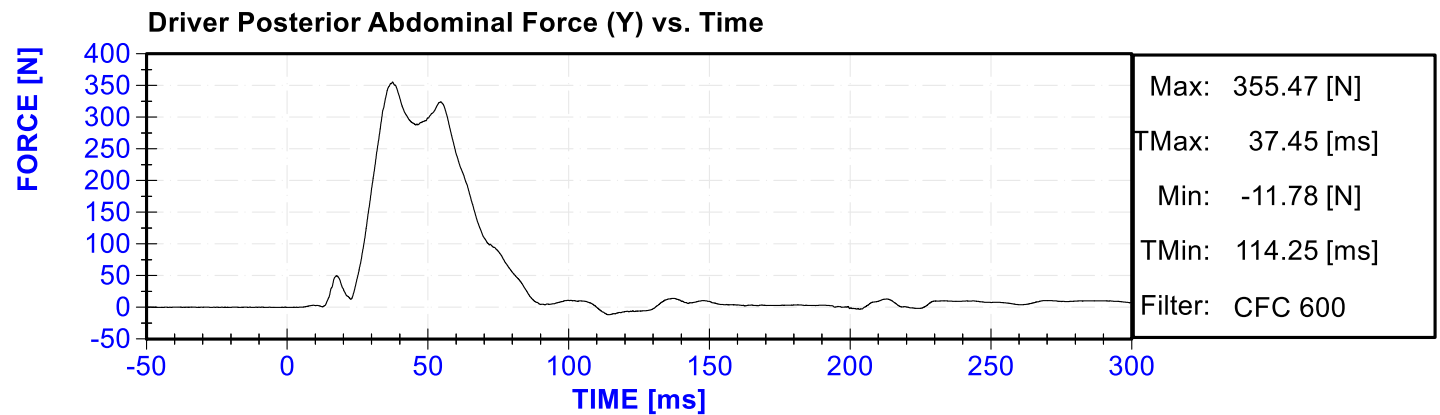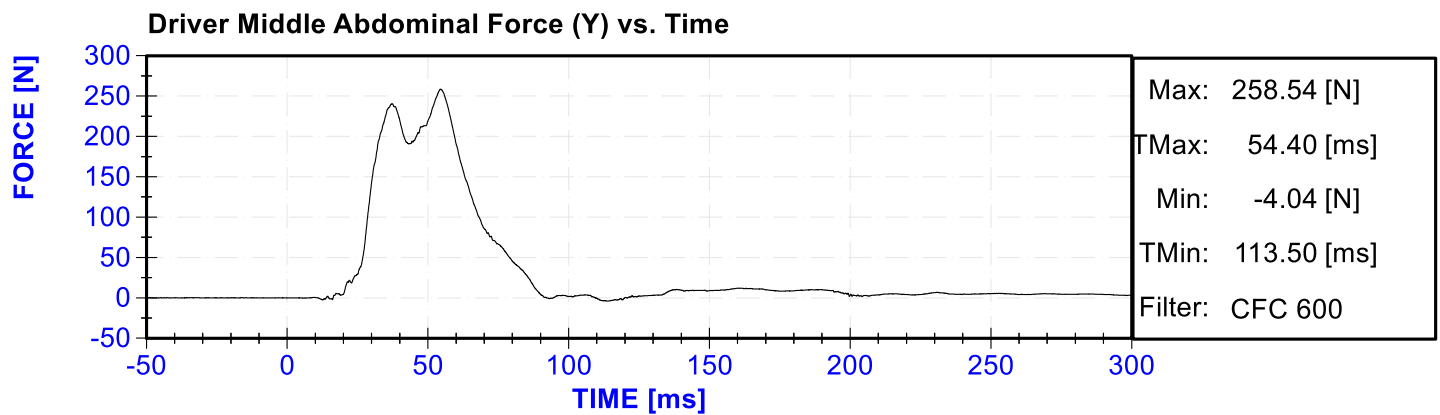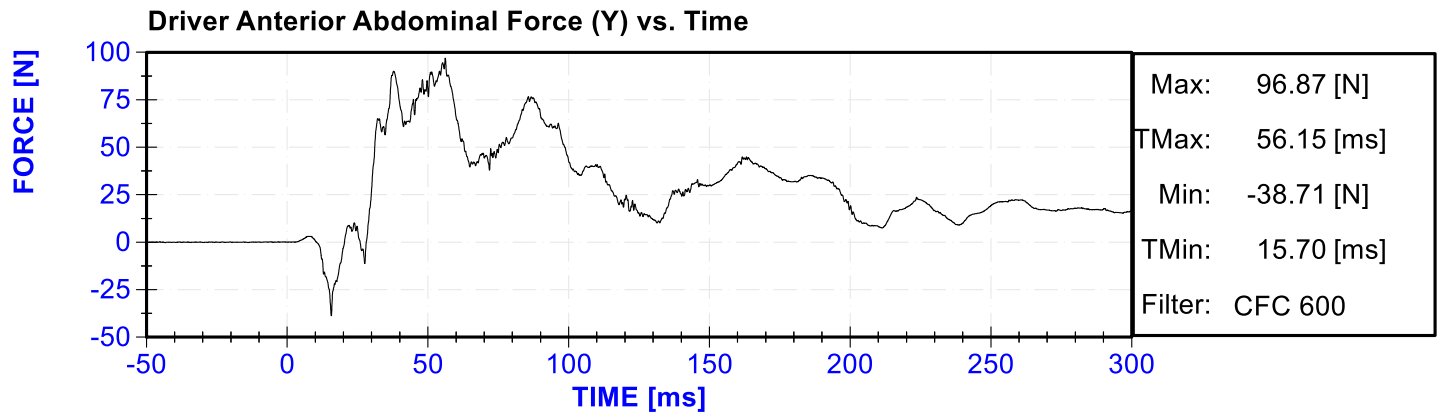



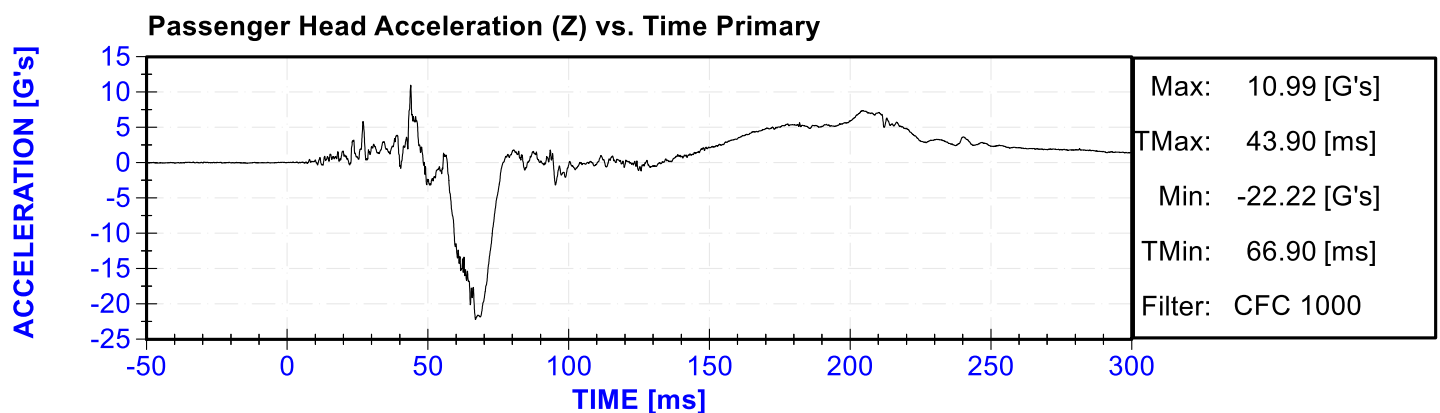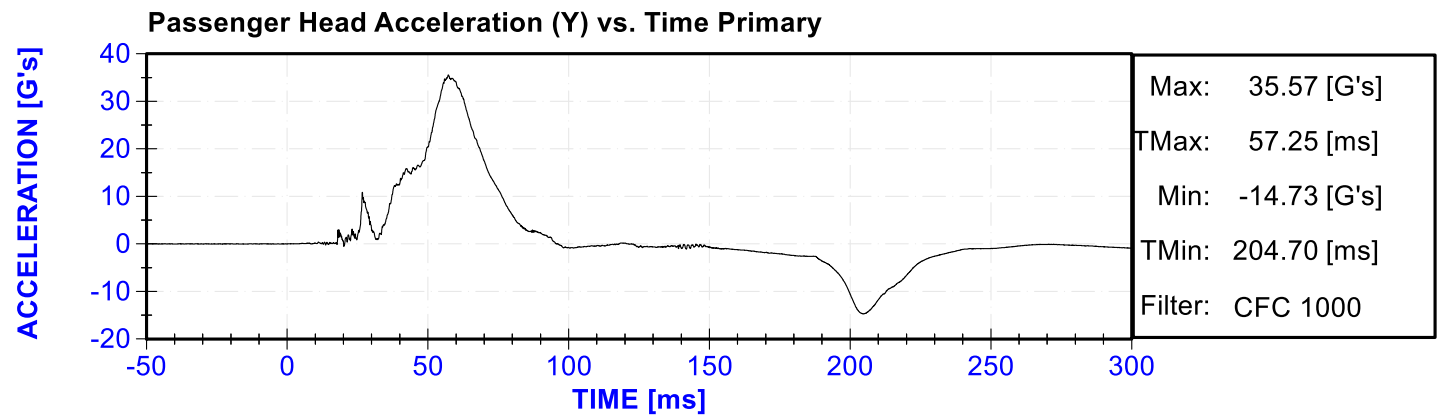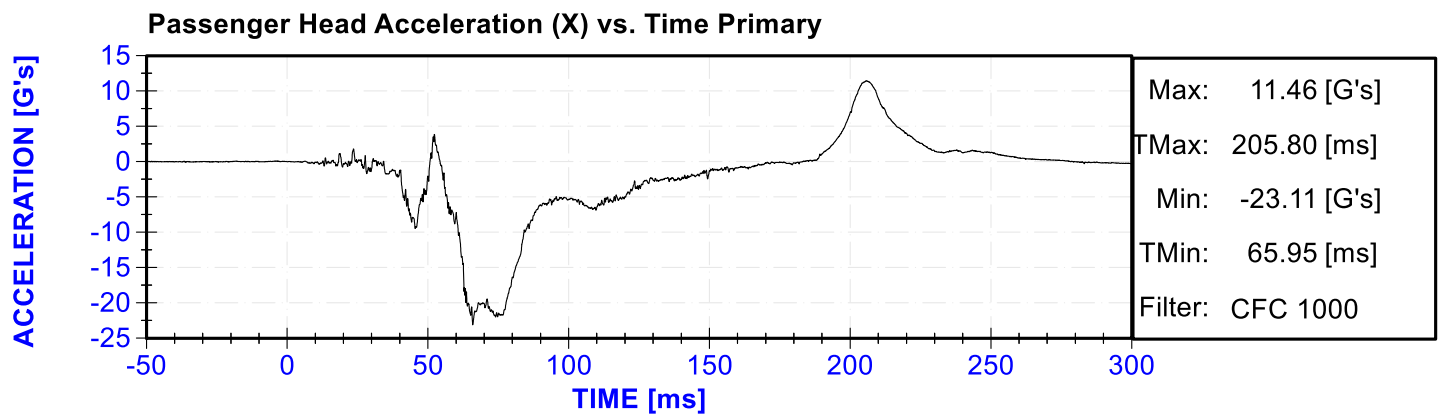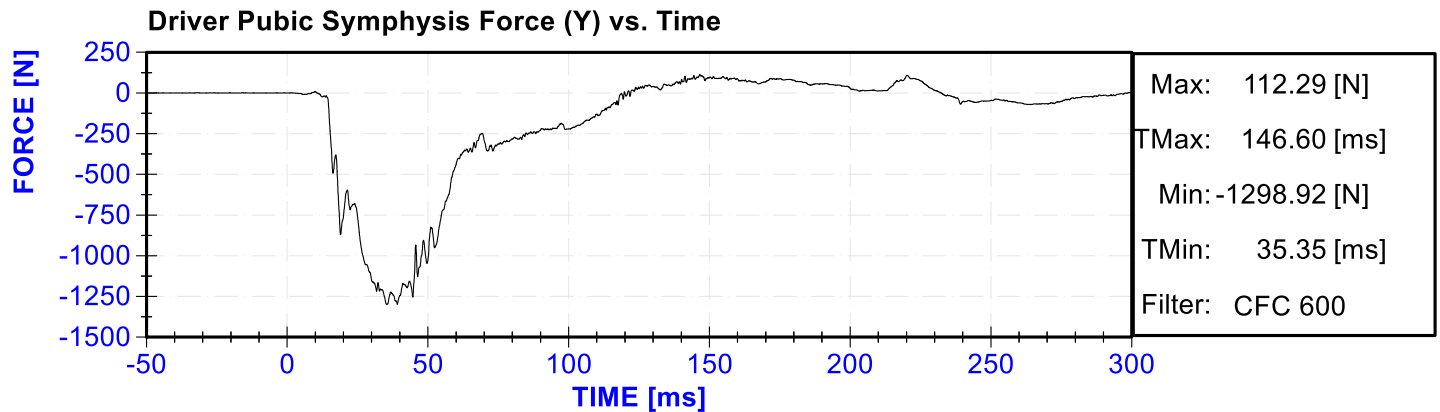

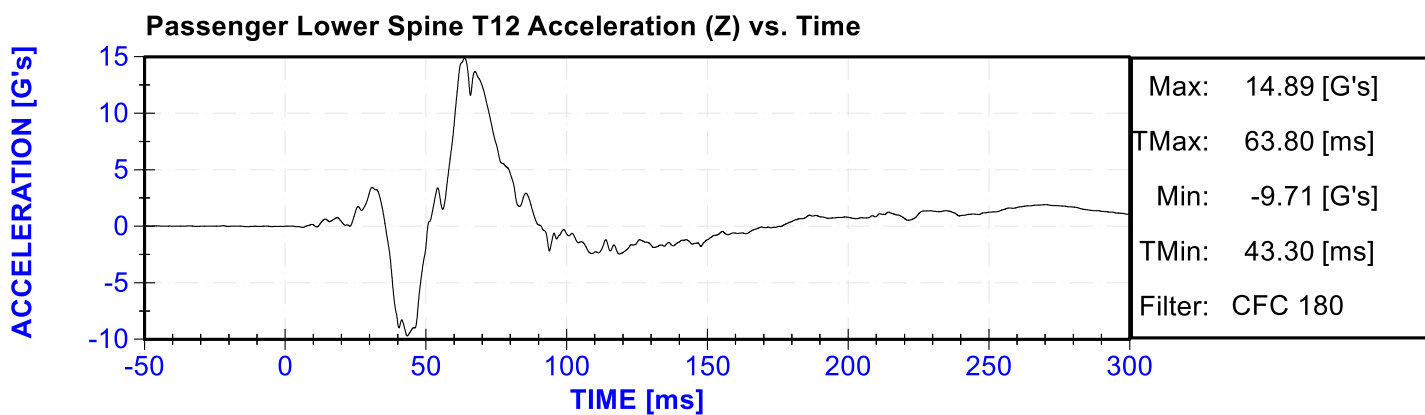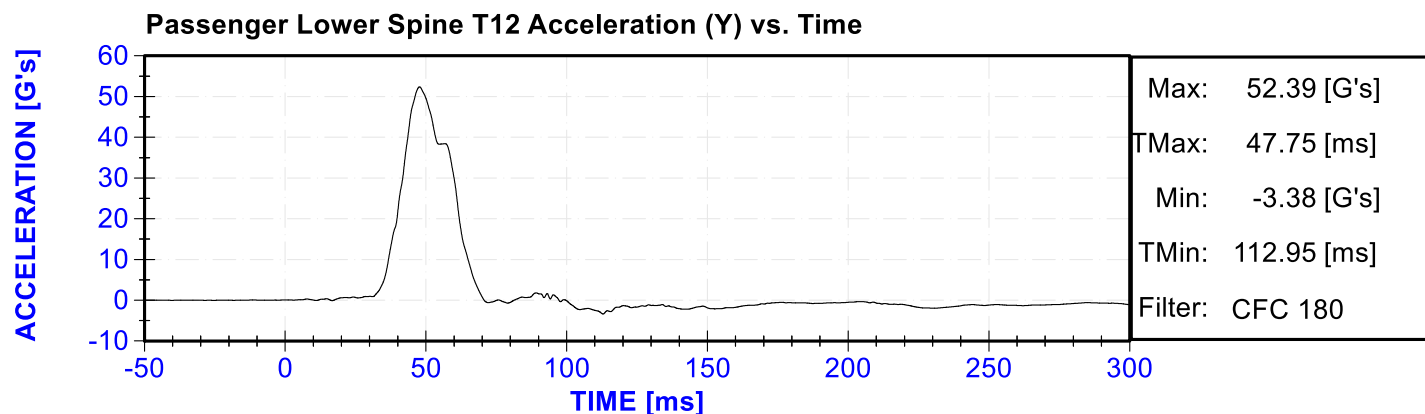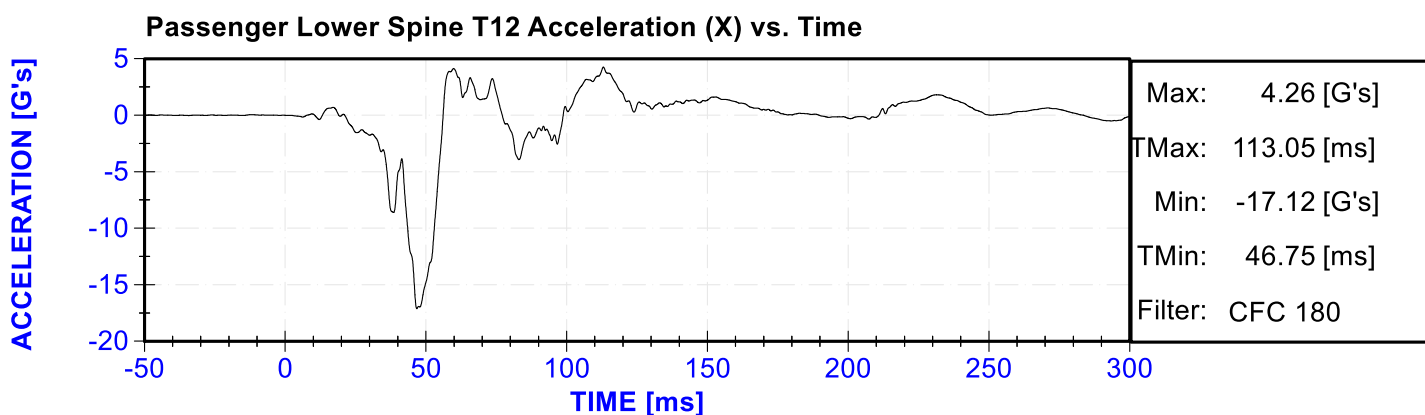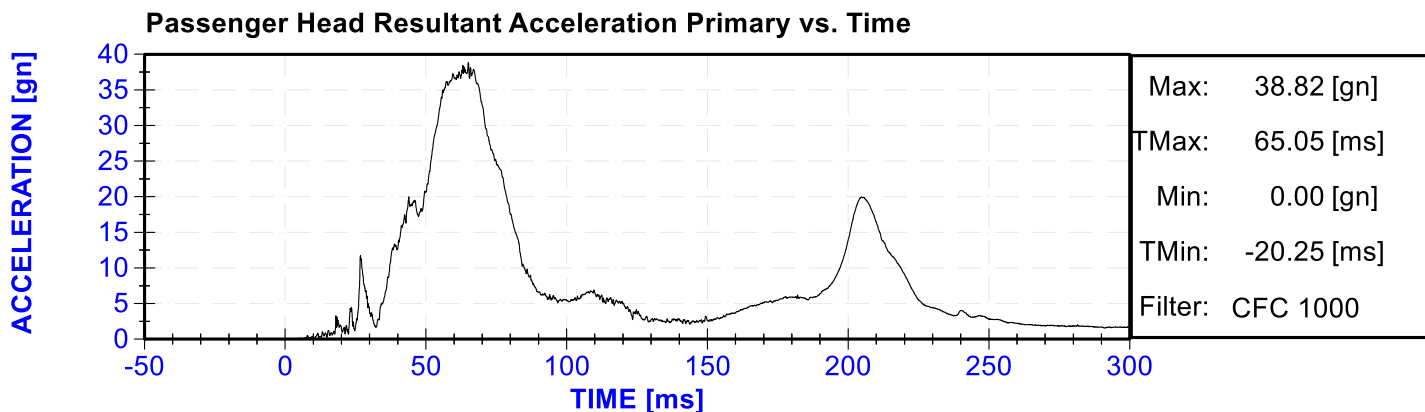

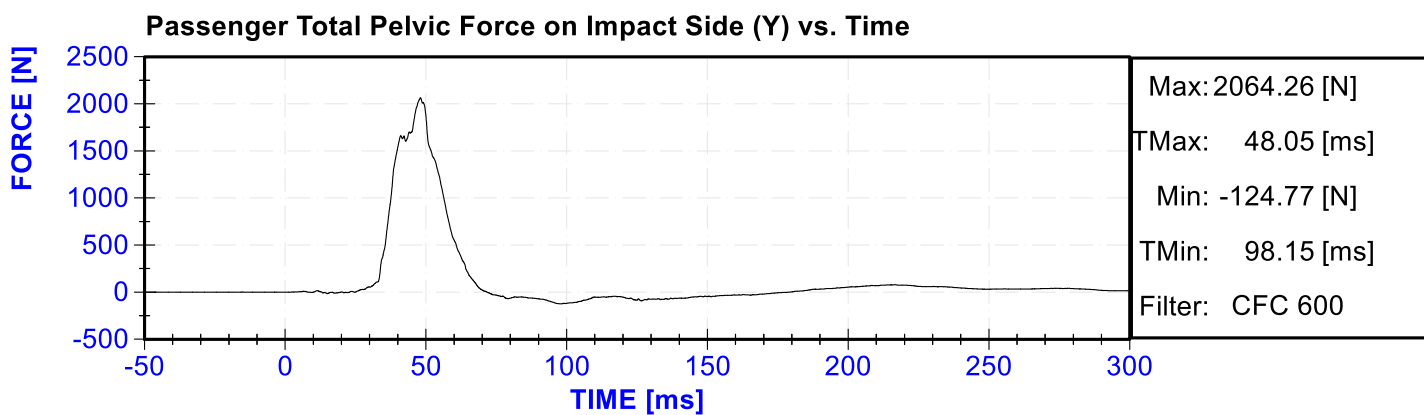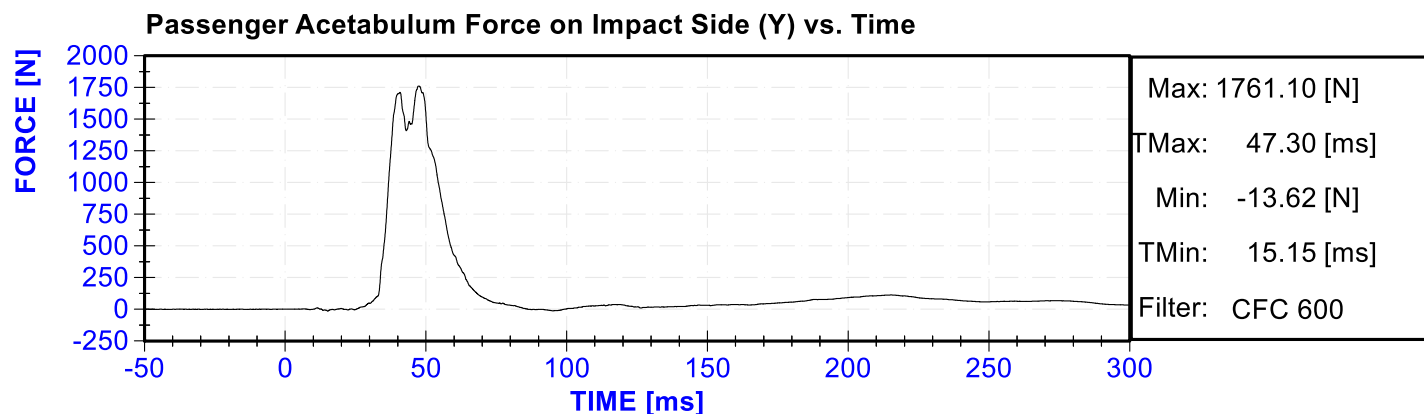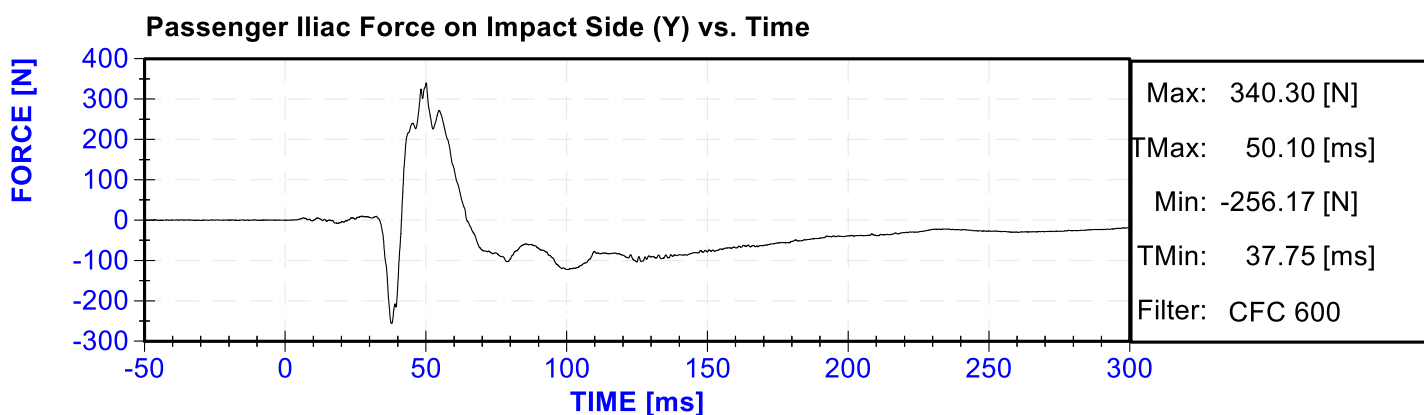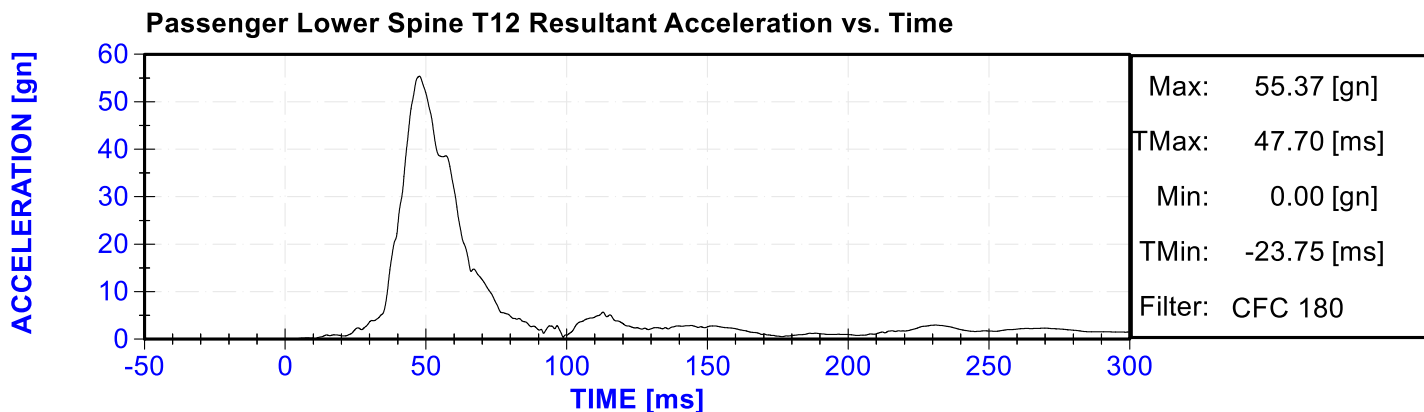



## **APPENDIX C**

### **DUMMY PERFORMANCE CALIBRATION TEST DATA**

**CALIBRATION TEST RESULTS**

**PRE-TEST**

**EUROSID 2 (ES-2RE) MALE – DRIVER ATD**

**SERIAL NO: F034**

**(CONFIGURED FOR LEFT SIDE IMPACT)**




# External Measurements - EuroSID-2re


Technician: K. Dutton

Date: 10/30/2019

Dummy Serial Number: F034

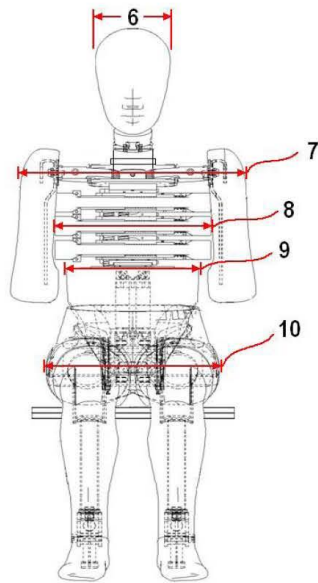

FRONT VIEW

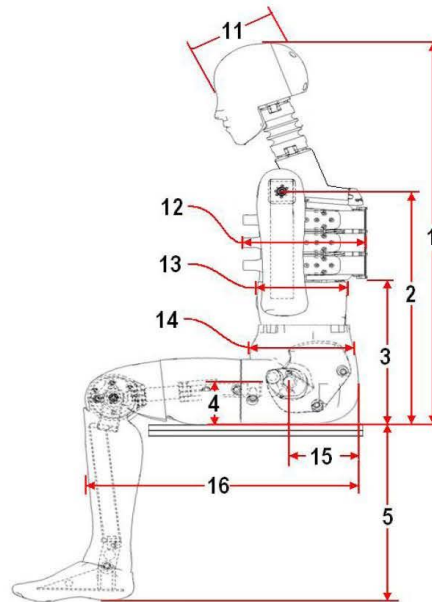

SIDE VIEW

Dim. No.	Description	Specification (mm)		Result (mm)	Pass/Fail
1	Sitting Height	900	918	910	Pass
2	Seat to Shoulder Joint	558	572	569	Pass
3	Seat to Lower Face of Thoracic Spine Box	346	356	352	Pass
4	Seat to Hip Joint (center of bolt)	97	103	99	Pass
5	Sole to Seat, Sitting	333	451	419	Pass
6	Head Width	152	158	155	Pass
7	Shoulder/Arm Width	461	479	472	Pass
8	Thorax Width	322	332	327	Pass
9	Abdomen Width	273	287	282	Pass
10	Pelvis Lap Width	359	373	365	Pass
11	Head Depth	196	206	202	Pass
12	Thorax Depth	262	272	269	Pass
13	Abdomen Depth	194	204	201	Pass
14	Pelvis Depth	235	245	242	Pass
15	Back of Buttocks to Hip Joint (center of bolt)	150	160	155	Pass
16	Back of Buttocks to Front Knee	597	615	609	Pass




ATD Manufacturer	FTSS	Test Technician	E. Helenbrook
ATD Serial Number	F034	Laboratory Supervisor	K. Brogan


#### Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21	Pass
Humidity	10	70	%	46	Pass
Resultant Acceleration	125	155	g's	129.6	Pass
Oscillation	0	15	%	11.79	Pass
Fore-Aft Acceleration	-15	15	g's	9.5	Pass

#### Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
X Accelerometer	Endevco	P49204	10/29/2019	4/29/2020
Y Accelerometer	Endevco	P63981	10/29/2019	4/29/2020
Z Accelerometer	Endevco	P64007	10/29/2019	4/29/2020

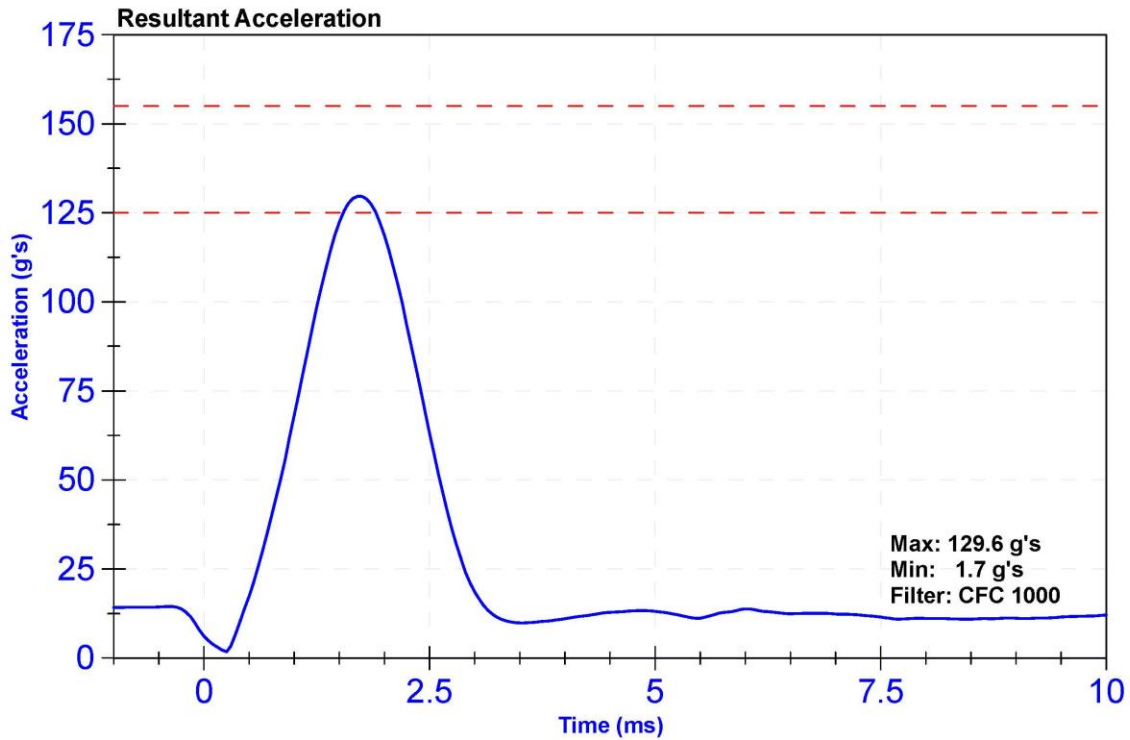

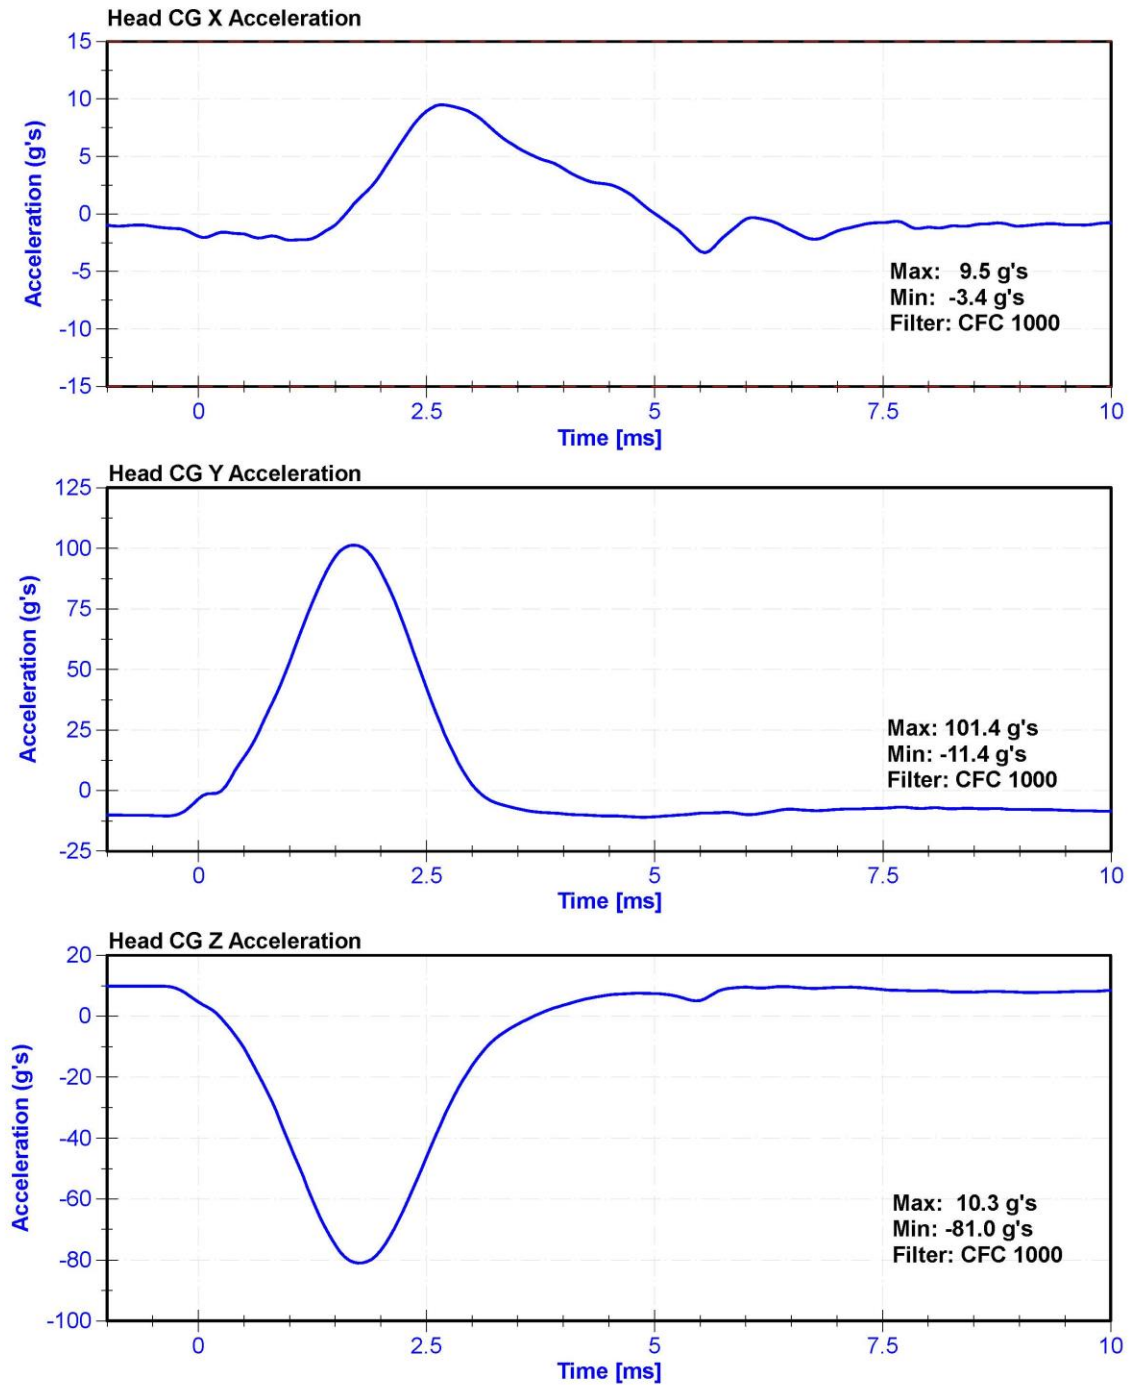


ATD Manufacturer	FTSS	Test Technician	K. Dutton
ATD Serial Number	F034	Laboratory Supervisor	K. Brogan

#### Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	20.9	Pass
Humidity	10	70	%	36.7	Pass
Velocity	4.2	4.4	m/s	4.25	Pass
Probe Acceleration	7.5	10.5	g's	9.91	Pass

#### Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Probe Accelerometer	MSI 64C-2000	A260568	7/29/2019	1/27/2020

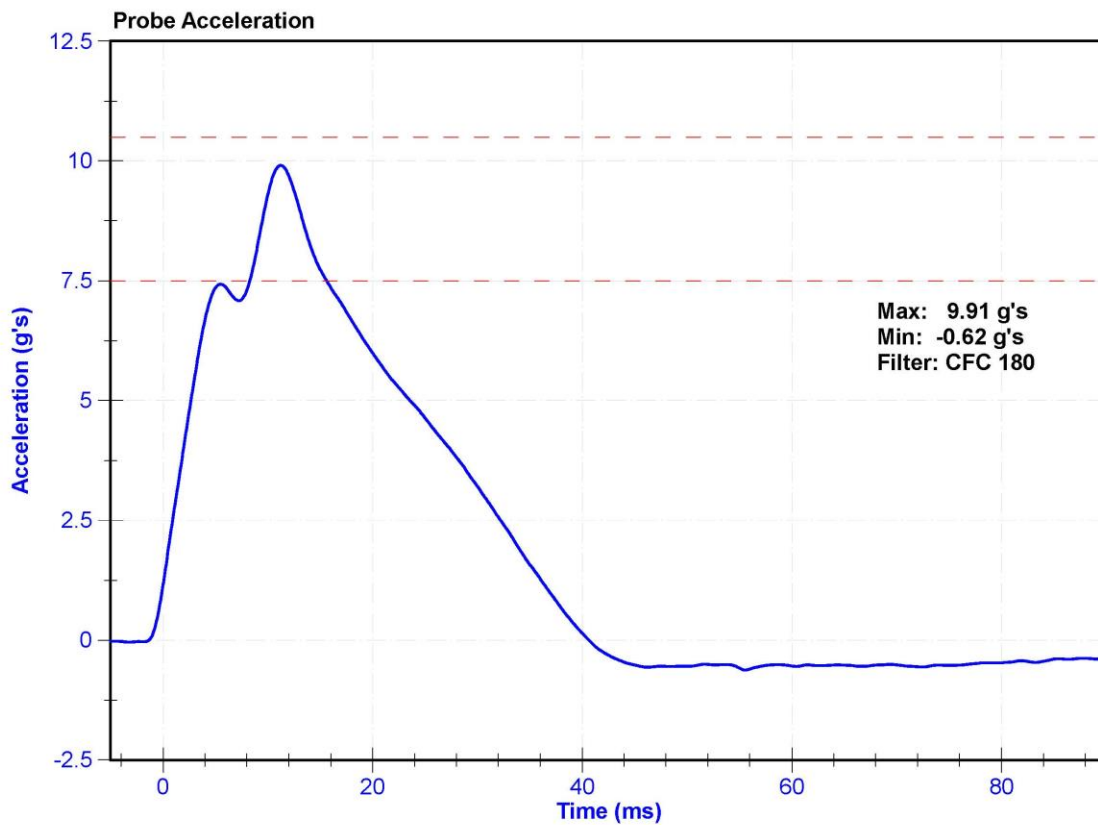




ATD Manufacturer	FTSS	Test Technician	K. Dutton
ATD Serial Number	F034	Laboratory Supervisor	K. Brogan




#### Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21.3	Pass
Humidity	10	70	%	39.7	Pass
Velocity	3.3	3.5	m/s	3.37	Pass
Lateral Neck Rotation	49	59	deg	52.4	Pass
Time at Maximum Rotation	54	66	ms	58.1	Pass
Time of Rotation Decay from Maximum	53	88	ms	55.4	Pass

#### Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	ENDEVCO 7231CT	AC-AH5M9	1/29/2019	1/29/2020
Front Pendulum Potentiometer	SP22G	DS-094	10/31/2019	10/30/2020
Headform Potentiometer	SP22G	DS-095	10/31/2019	10/30/2020

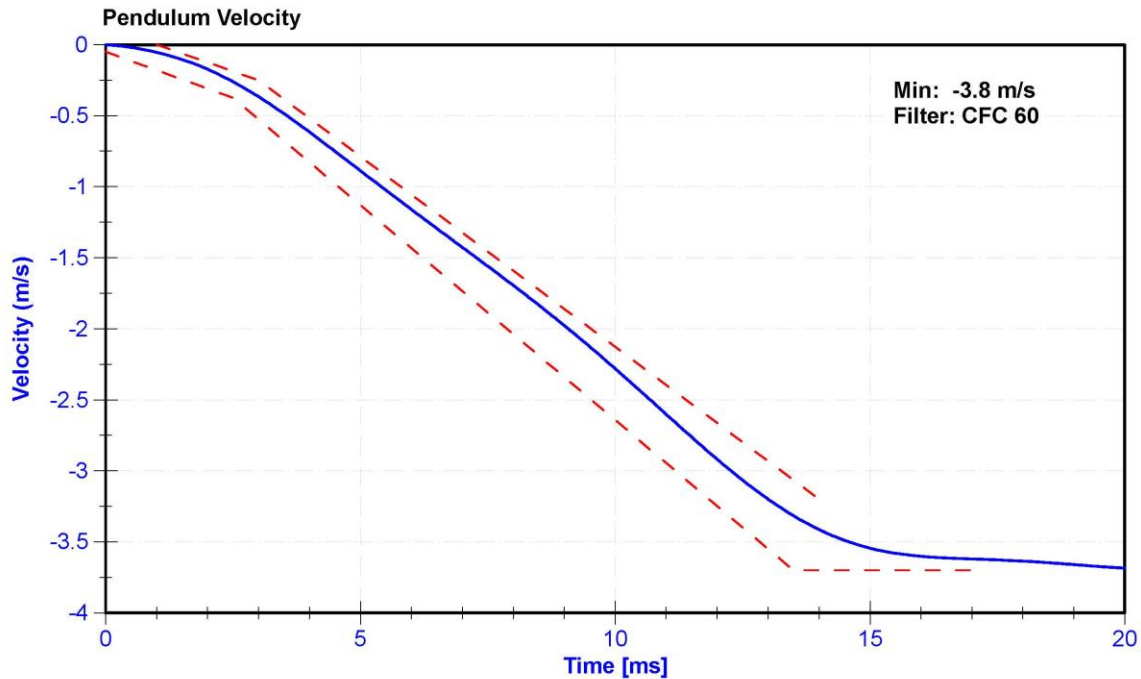

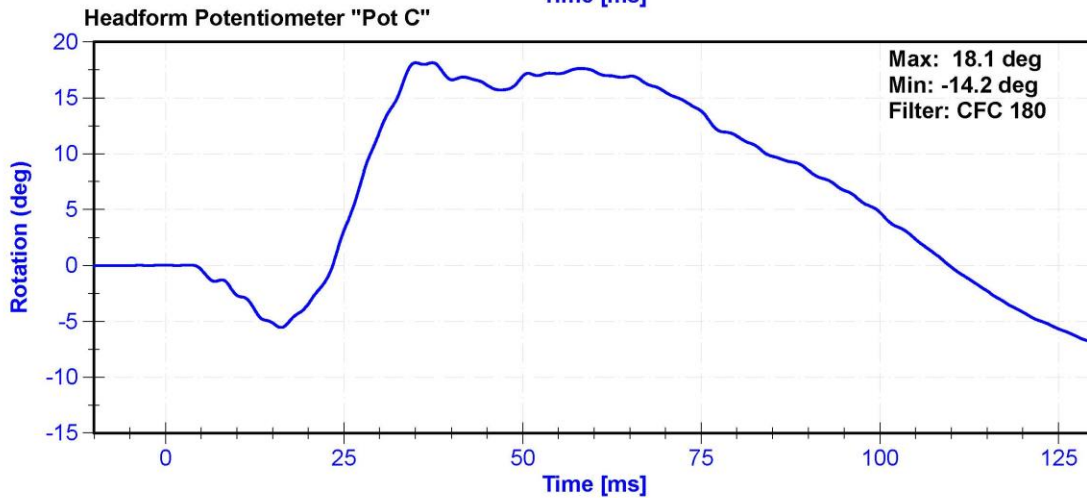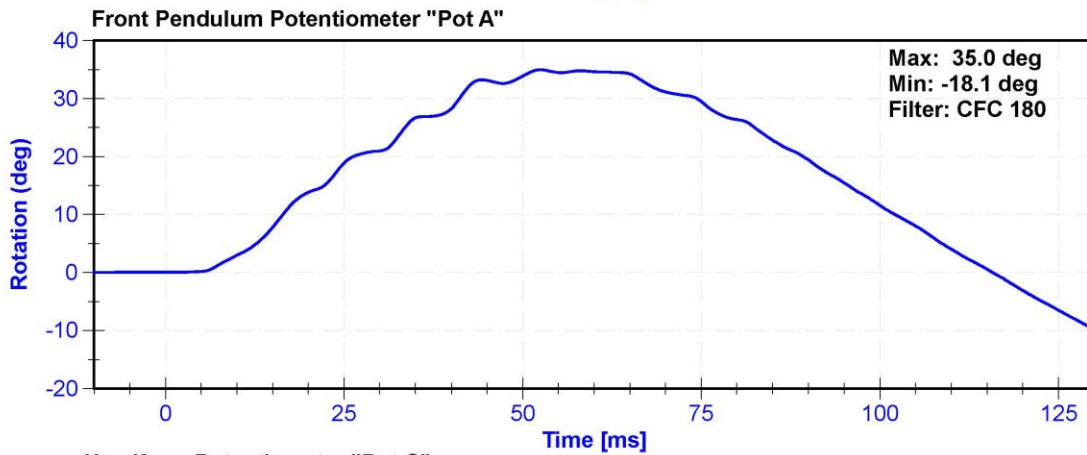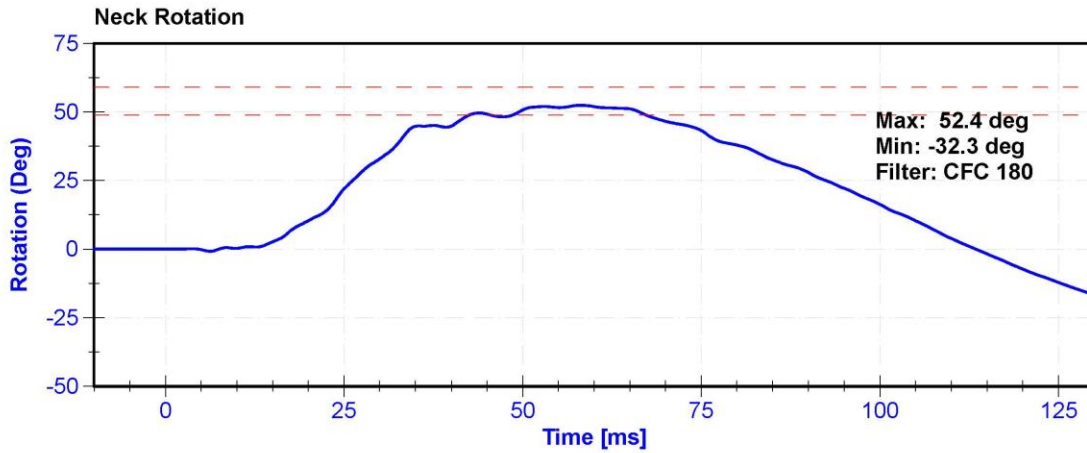


ATD Manufacturer	FTSS	Test Technician	D.Reinhard
ATD Serial Number	F034	Laboratory Supervisor	K. Brogan

#### Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21.4	Pass
Humidity	10	70	%	33.5	Pass
Rib Displacement	36	40	mm	37.3	Pass

#### Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Rib Potentiometer	Honeywell MLT-38000203	DS-183GFE	10/31/2019	4/30/2020

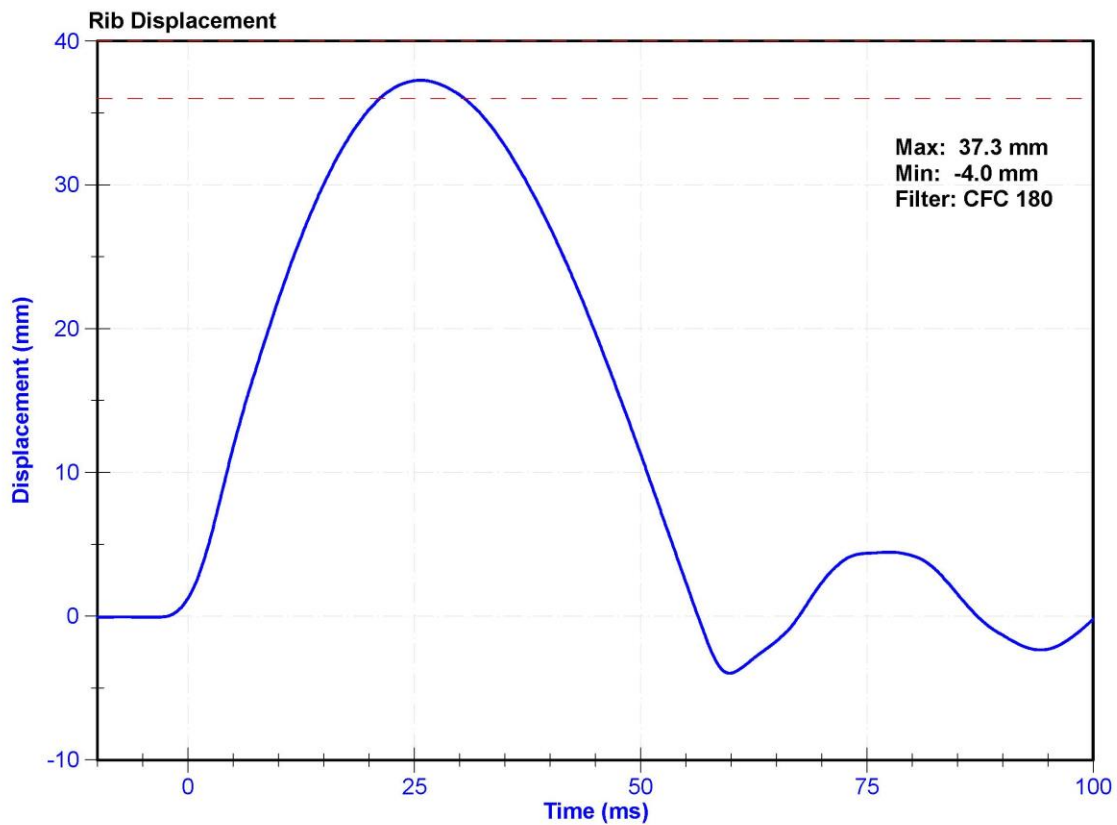




ATD Manufacturer	FTSS	Test Technician	D.Reinhard
ATD Serial Number	F034	Laboratory Supervisor	K. Brogan

#### Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21.6	Pass
Humidity	10	70	%	34.5	Pass
Rib Displacement	46	51	mm	47.8	Pass

#### Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Rib Potentiometer	Honeywell MLT-38000203	DS-183GFE	10/31/2019	4/30/2020

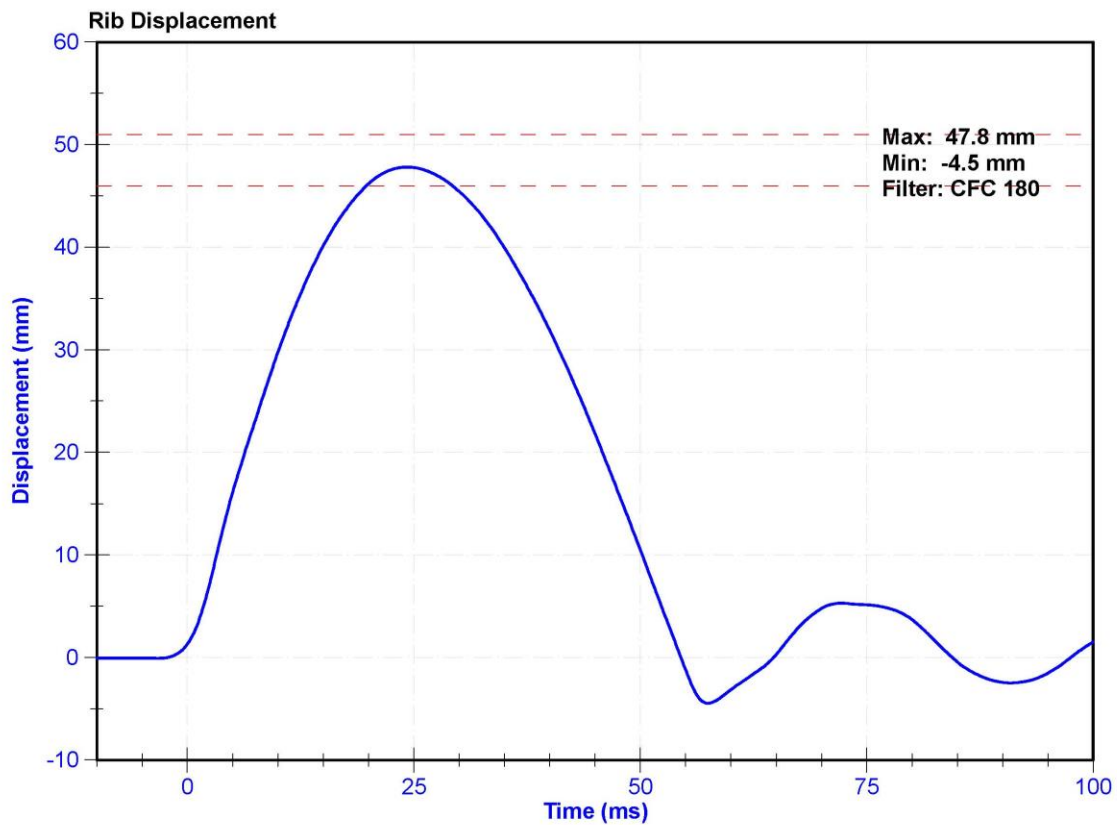


ATD Manufacturer	FTSS	Test Technician	D.Reinhard
ATD Serial Number	F034	Laboratory Supervisor	K. Brogan

#### Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	22.0	Pass
Humidity	10	70	%	48.1	Pass
Rib Displacement	36	40	mm	37.8	Pass

#### Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Rib Potentiometer	Honeywell MLT-38000203	DS-184GFE	10/31/2019	4/30/2020

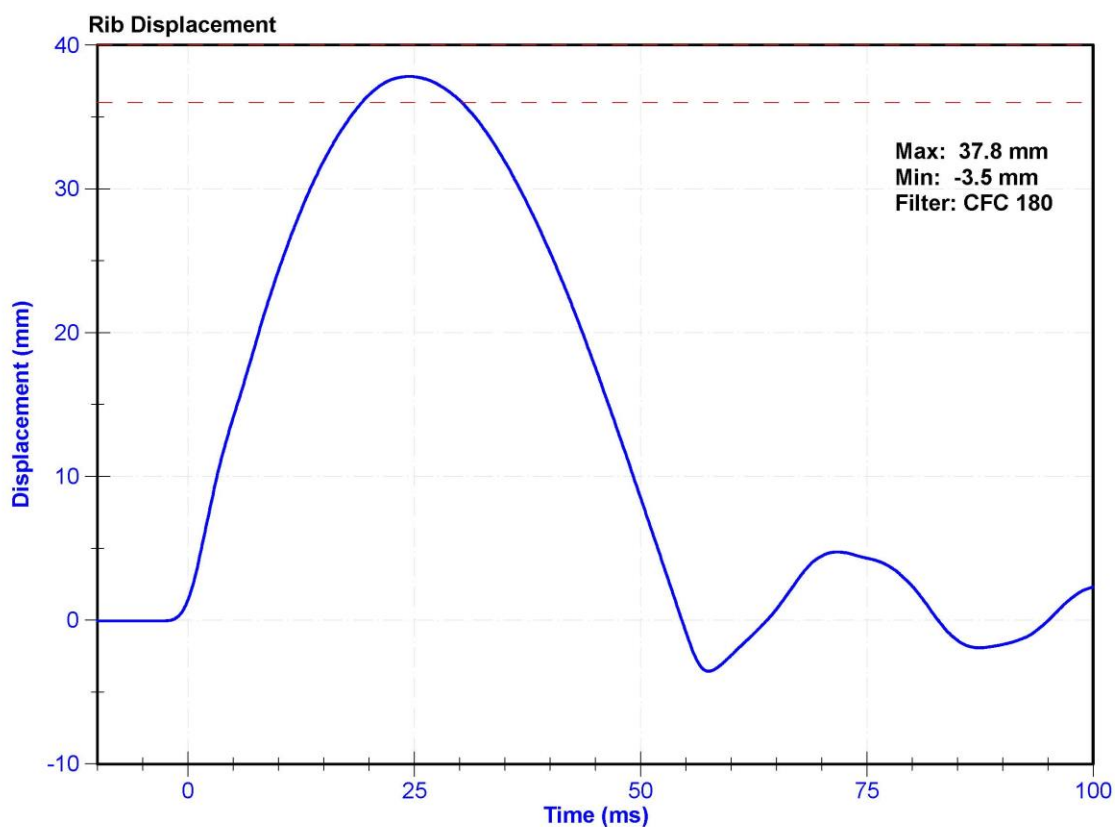


ATD Manufacturer	FTSS	Test Technician	D.Reinhard
ATD Serial Number	F034	Laboratory Supervisor	K. Brogan

#### Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21.2	Pass
Humidity	10	70	%	33.3	Pass
Rib Displacement	46	51	mm	48.8	Pass

#### Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Rib Potentiometer	Honeywell MLT-38000203	DS-184GFE	10/31/2019	4/30/2020

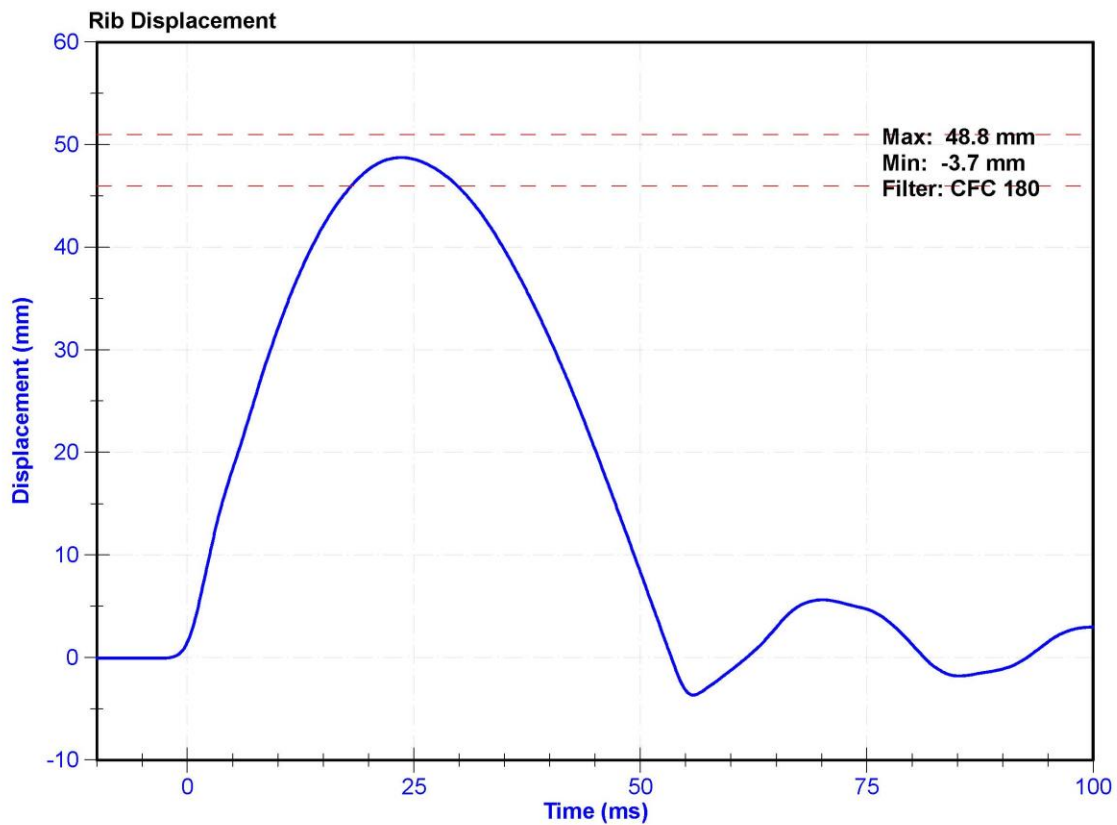




ATD Manufacturer	FTSS	Test Technician	D.Reinhard
ATD Serial Number	F034	Laboratory Supervisor	K. Brogan

#### Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21.1	Pass
Humidity	10	70	%	32.9	Pass
Rib Displacement	36	40	mm	39.0	Pass

#### Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Rib Potentiometer	Honeywell MLT-38000203	DS-182GFE	10/31/2019	4/30/2020

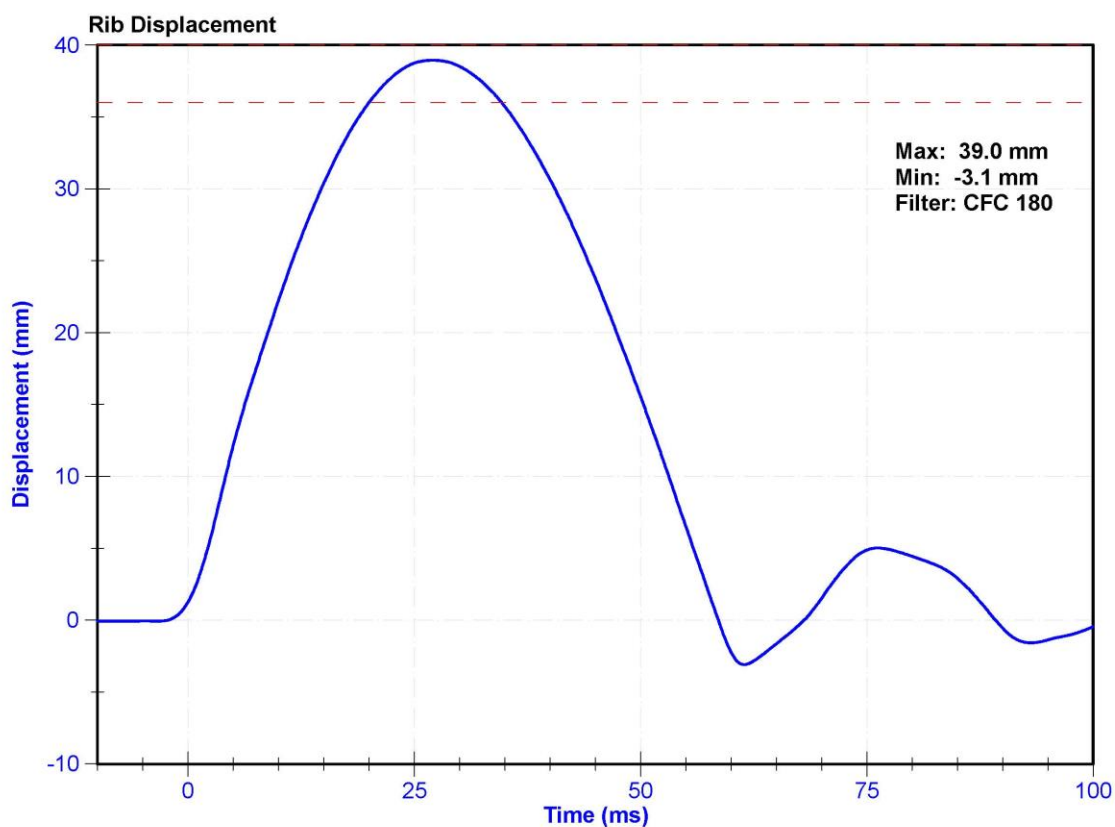


ATD Manufacturer	FTSS	Test Technician	D.Reinhard
ATD Serial Number	F034	Laboratory Supervisor	K. Brogan

#### Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21.2	Pass
Humidity	10	70	%	33.9	Pass
Rib Displacement	46	51	mm	50.2	Pass

#### Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Rib Potentiometer	Honeywell MLT-38000203	DS-182GFE	10/31/2019	4/30/2020

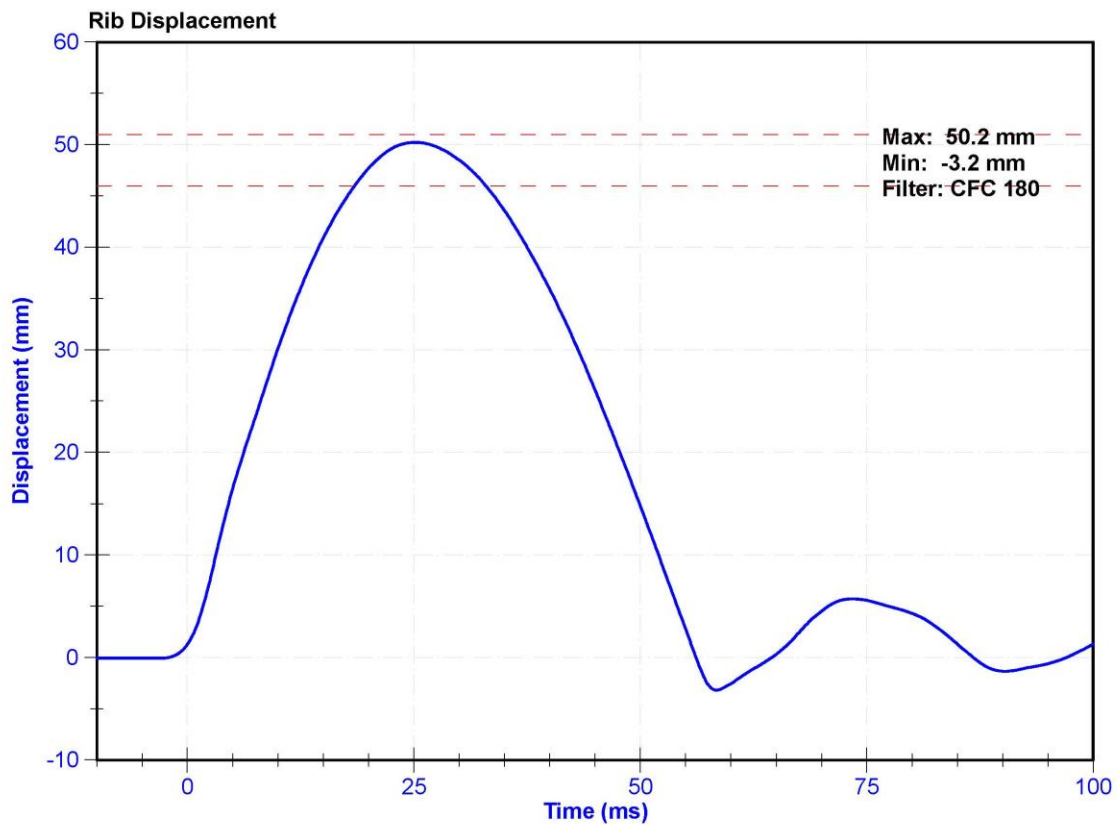


ATD Manufacturer	FTSS	Test Technician	K. Dutton
ATD Serial Number	F034	Laboratory Supervisor	K. Brogan

#### Results





Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	20.9	Pass
Humidity	10	70	%	36.2	Pass
Velocity	5.4	5.6	m/s	5.45	Pass
Resistive Force after 6ms	5100	6200	N	5907.4	Pass
Upper Thorax Rib Deflection	34	41	mm	36.6	Pass
Mid Thorax Rib Deflection	37	45	mm	40.4	Pass
Lower Thorax Rib Deflection	37	44	mm	40.2	Pass

#### Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Probe Accelerometer	MSI 64C-2000	A260568	7/29/2019	1/27/2020
Upper Thorax Rib Potentiometer	Honeywell MLT-38000203	DS-183GFE	10/31/2019	4/30/2020
Middle Thorax Rib Potentiometer	Honeywell MLT-38000203	DS-184GFE	10/31/2019	4/30/2020
Lower Thorax Rib Potentiometer	Honeywell MLT-38000203	DS-182GFE	10/31/2019	4/30/2020

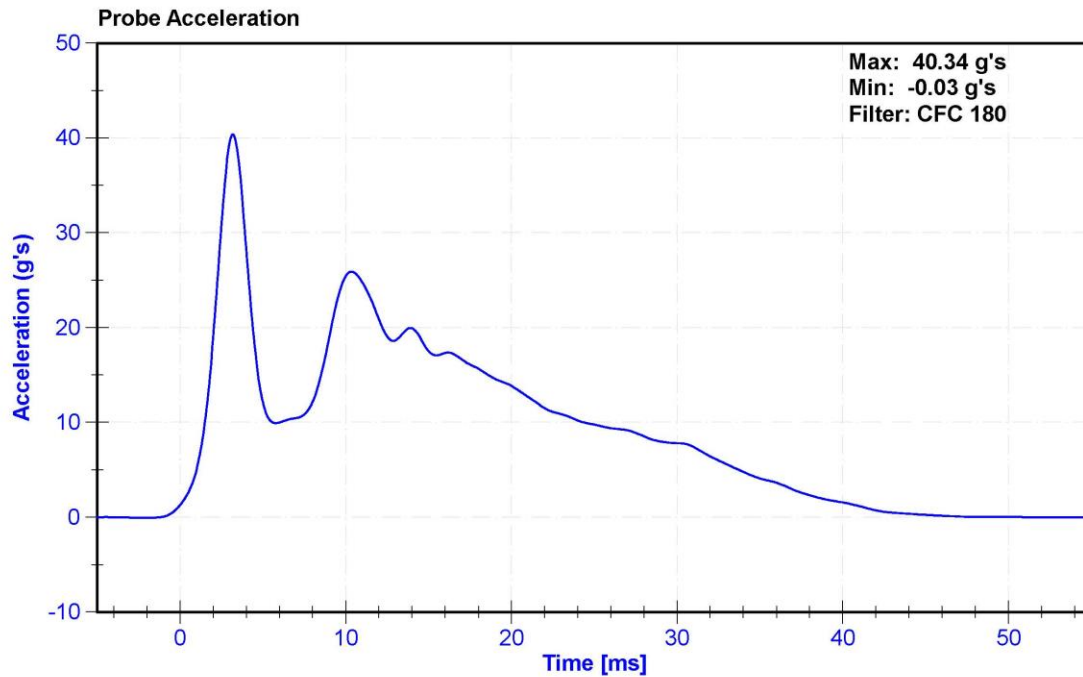



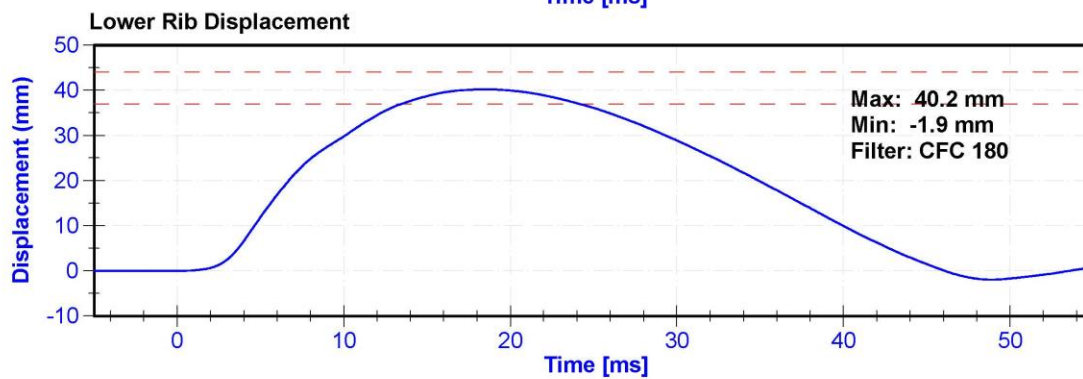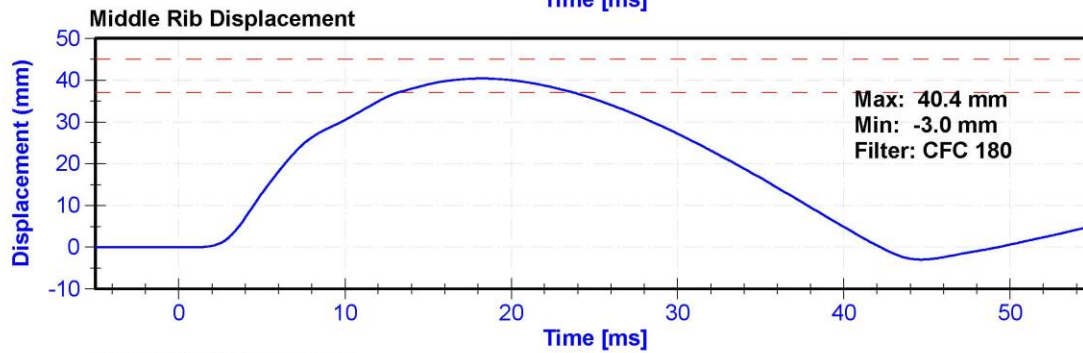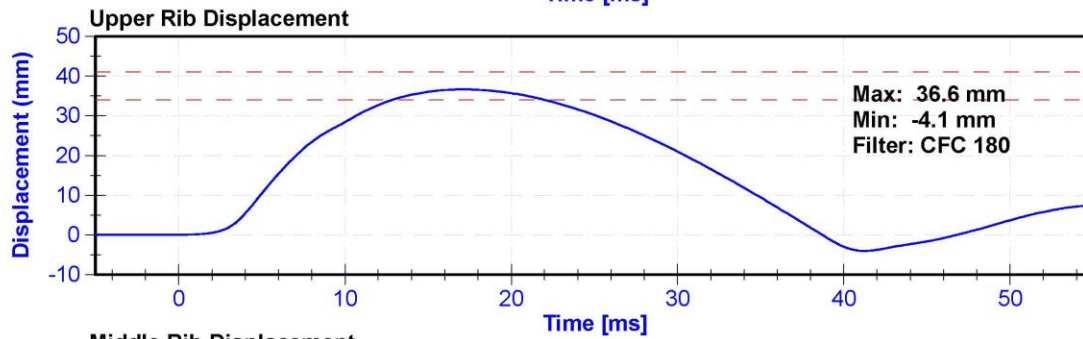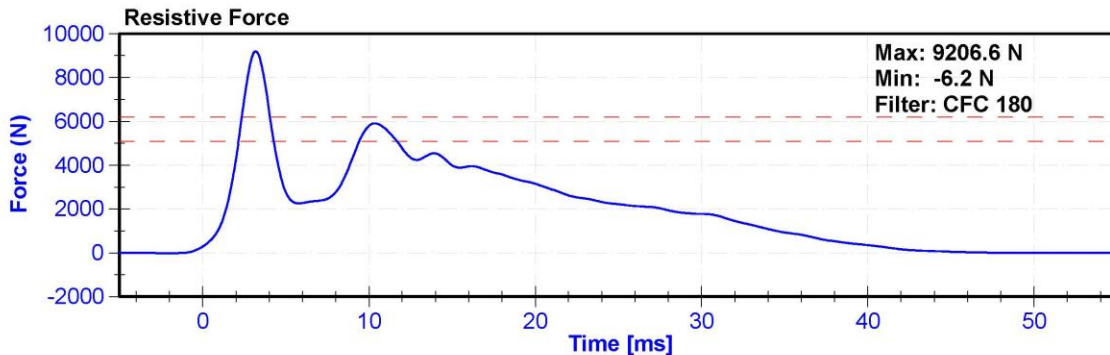


ATD Manufacturer	FTSS	Test Technician	D.Reinhard
ATD Serial Number	F034	Laboratory Supervisor	K.Brogan





#### Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21.1	Pass
Humidity	10	70	%	37.7	Pass
Velocity	3.9	4.1	m/s	4.10	Pass
Combined Abdomen Force	2200	2700	N	2532.0	Pass
Time at Peak Abdomen Force	10.0	12.3	ms	11.95	Pass
Resistive Probe Force	4000	4800	N	4745.9	Pass
Time at Peak Resistive Force	10.6	13.0	ms	12.00	Pass

#### Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	MSI 64C-2000	A260568	7/29/2019	1/27/2020
Front Abdomen Load Cell	DENTON 2631	LC-1440	6/14/2019	6/13/2020
Middle Abdomen Load Cell	DENTON 2631	LC-1525	6/5/2019	6/4/2020
Rear Abdomen Load Cell	DENTON 2631	LC-1528	6/14/2019	6/13/2020

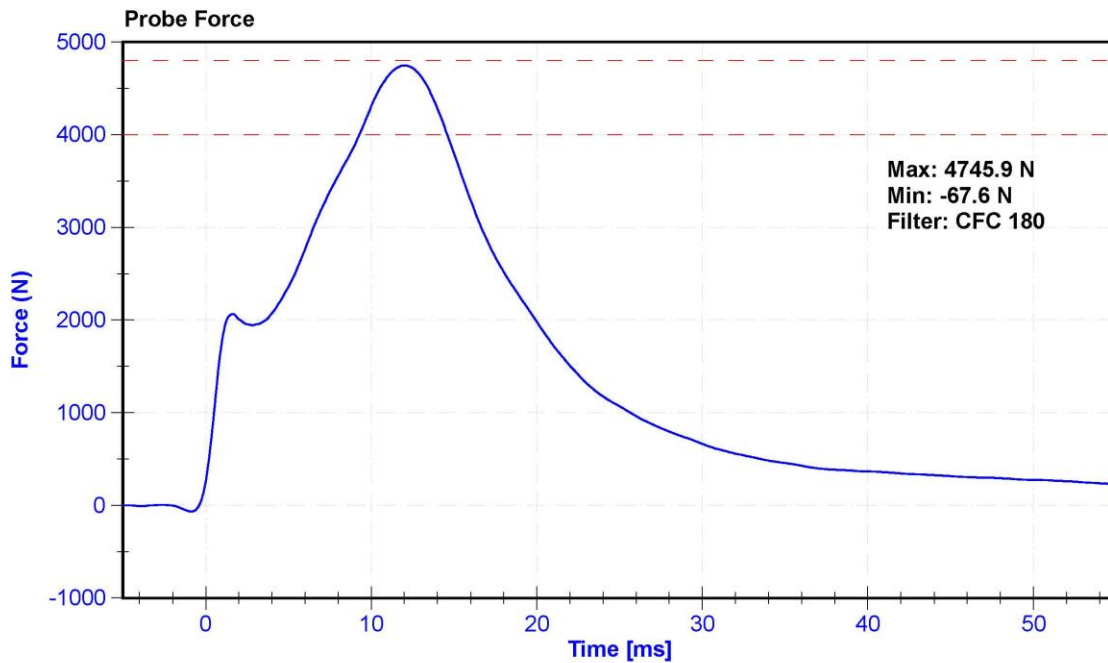

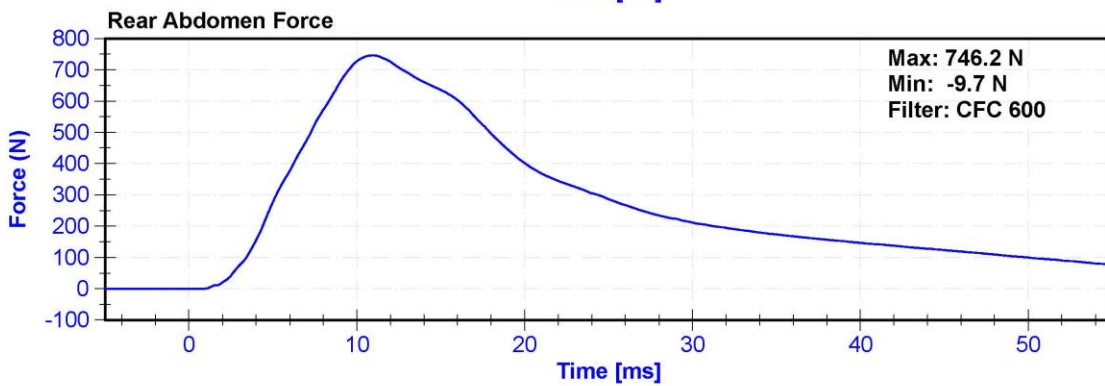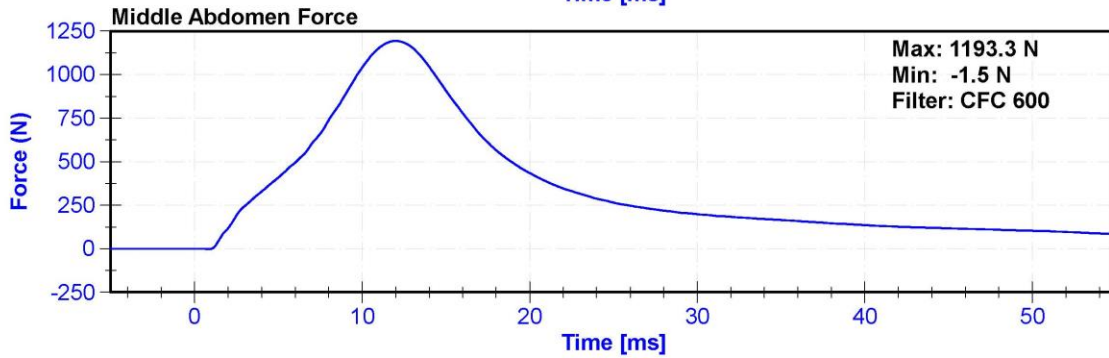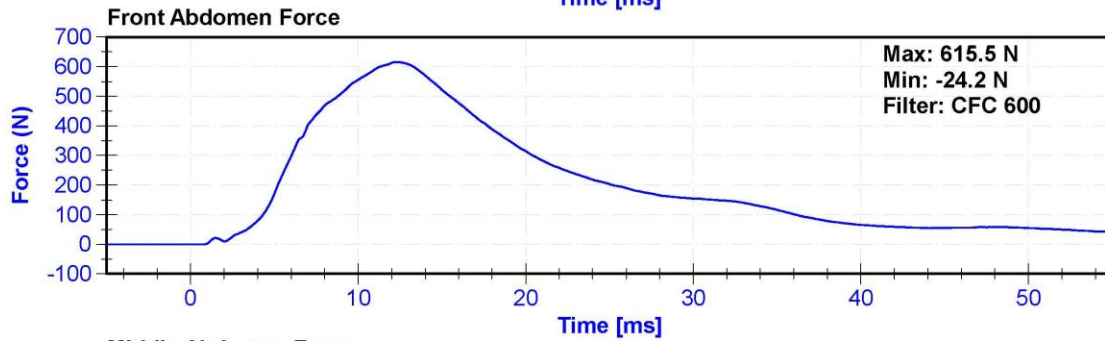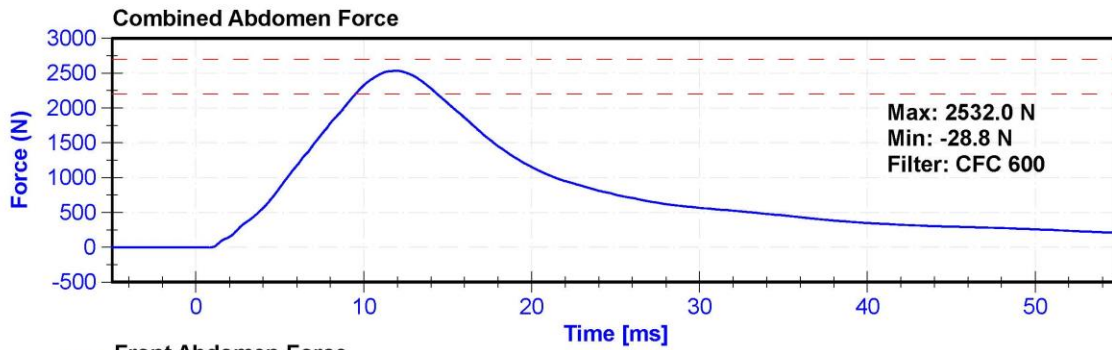







ATD Manufacturer	FTSS	Test Technician	C. Mantell
ATD Serial Number	F034	Laboratory Supervisor	K. Brogan



#### Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21.9	Pass
Humidity	10	70	%	42.0	Pass
Velocity	5.95	6.15	m/s	5.964	Pass
Lateral Spine Rotation	45	55	deg	48.5	Pass
Time at Maximum Rotation	39	53	ms	45.6	Pass
Time of Decay to Zero Degrees	37	57	ms	37.2	Pass
Pulse within Corridor?	-	-	-		

#### Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	ENDEVCO 7231CT	AC-AH5M9 Pend	1/29/2019	1/29/2020
Pendulum "A" Potentiometer	SP22G	DS-094	10/31/2019	10/30/2020
Condyle "B" Potentiometer	SP22G	DS-095	10/31/2019	10/30/2020

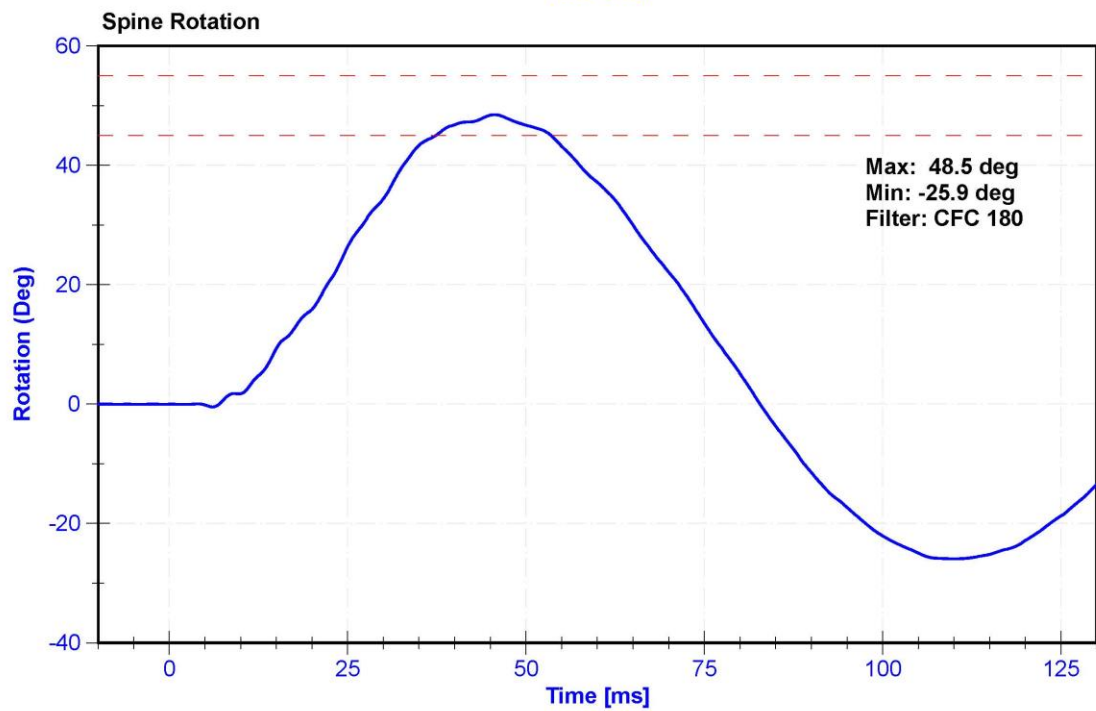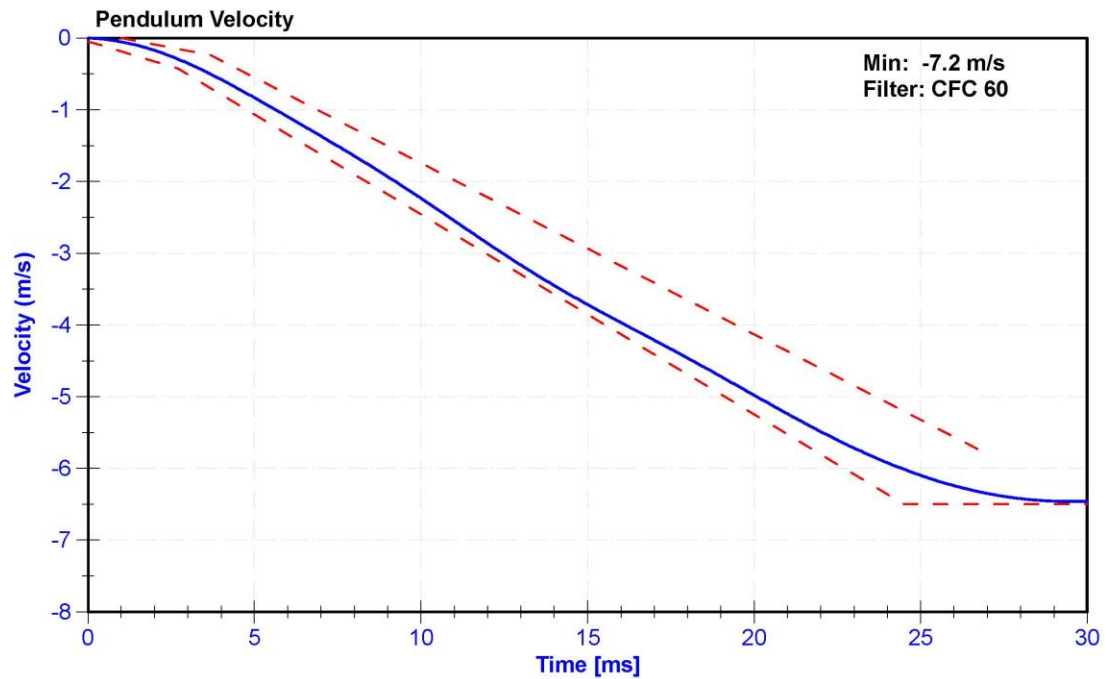

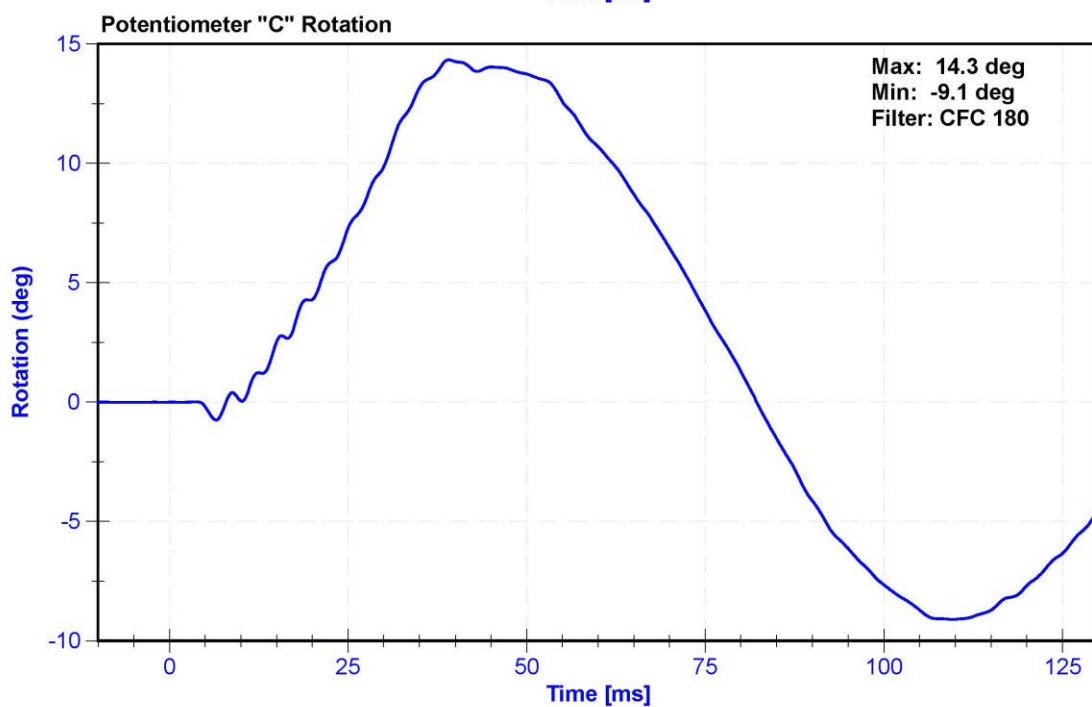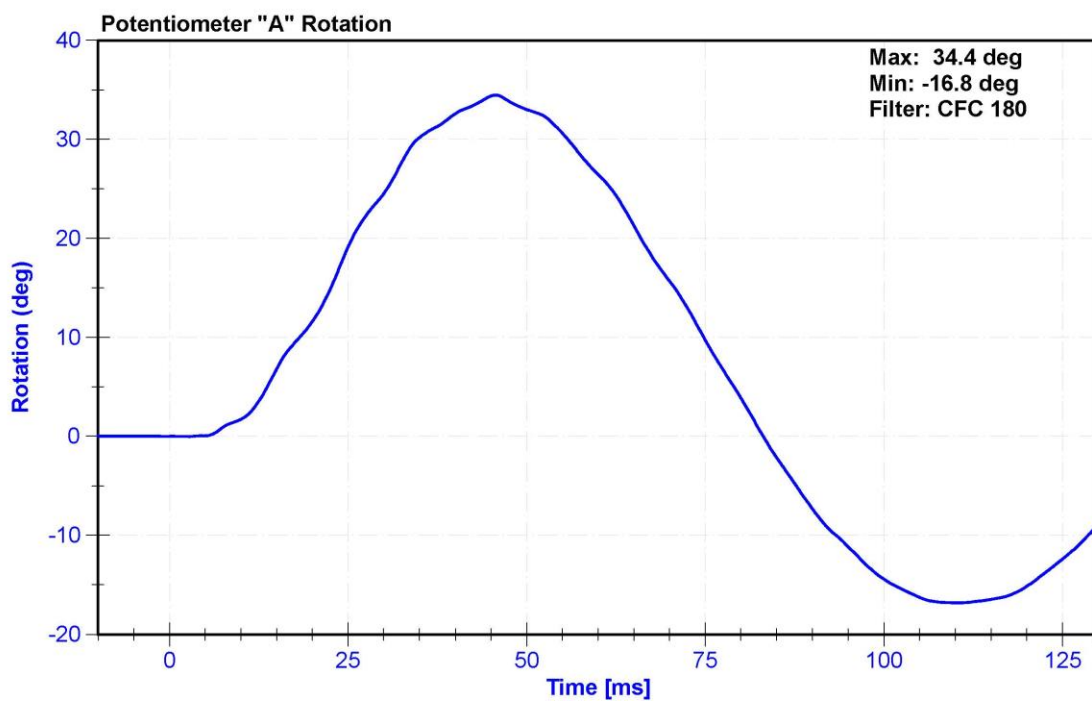




ATD Manufacturer	FTSS	Test Technician	D.Reinhard
ATD Serial Number	F034	Laboratory Supervisor	K. Brogan



#### Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21.4	Pass
Humidity	10	70	%	30.7	Pass
Velocity	4.2	4.4	m/s	4.40	Pass
Resistive Force	4700	5400	N	4960.9	Pass
Time at Peak Resistive Force	11.8	16.1	ms	12.80	Pass
Pubic Force	-1590	-1230	N	-1357.2	Pass
Time at Peak Pubic Force	12.2	17.0	ms	13.80	Pass

#### Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	MSI 64C-2000	A260568	7/29/2019	1/27/2020
Pubic Load Cell	Denton 3096JFL	LC-464fy	6/14/2019	6/13/2020

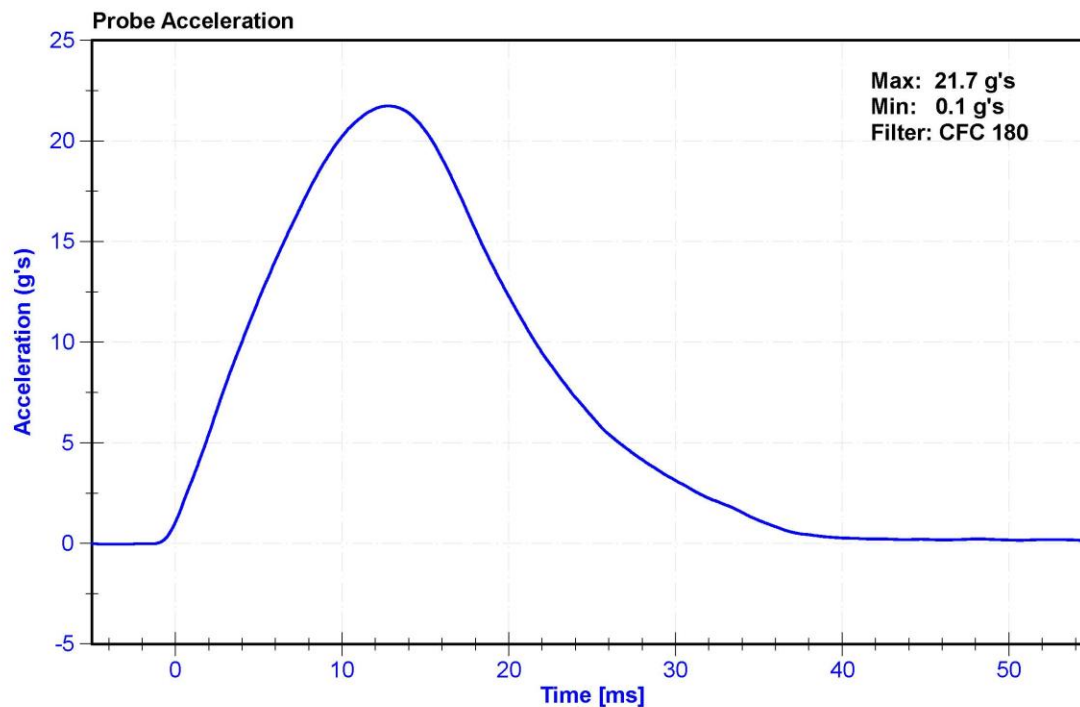

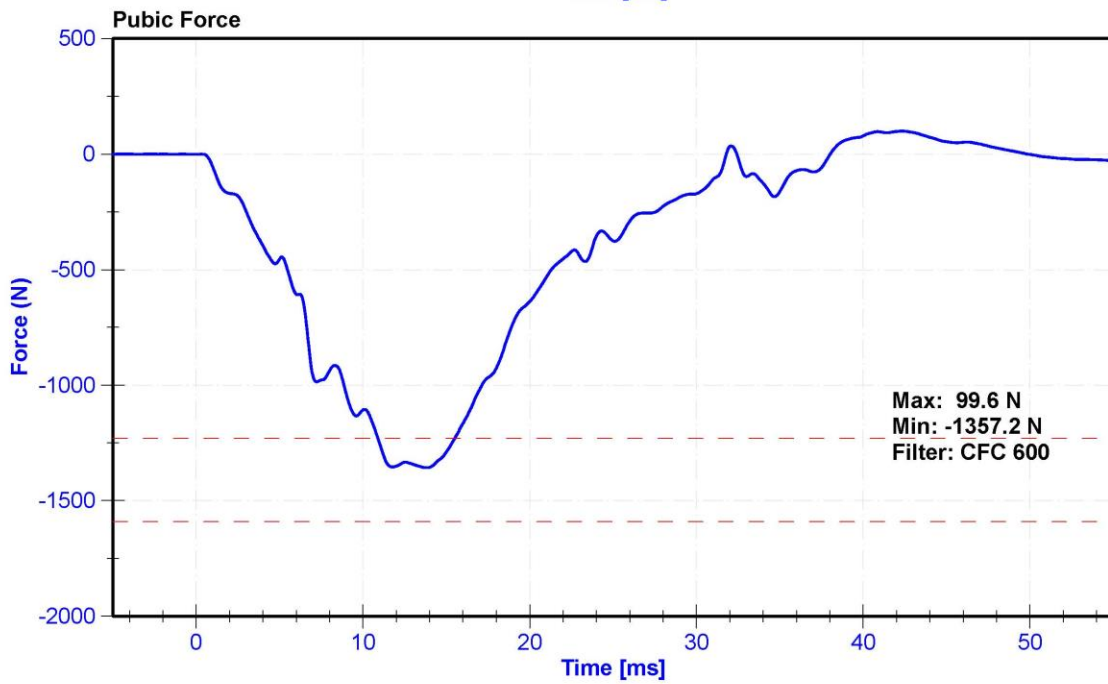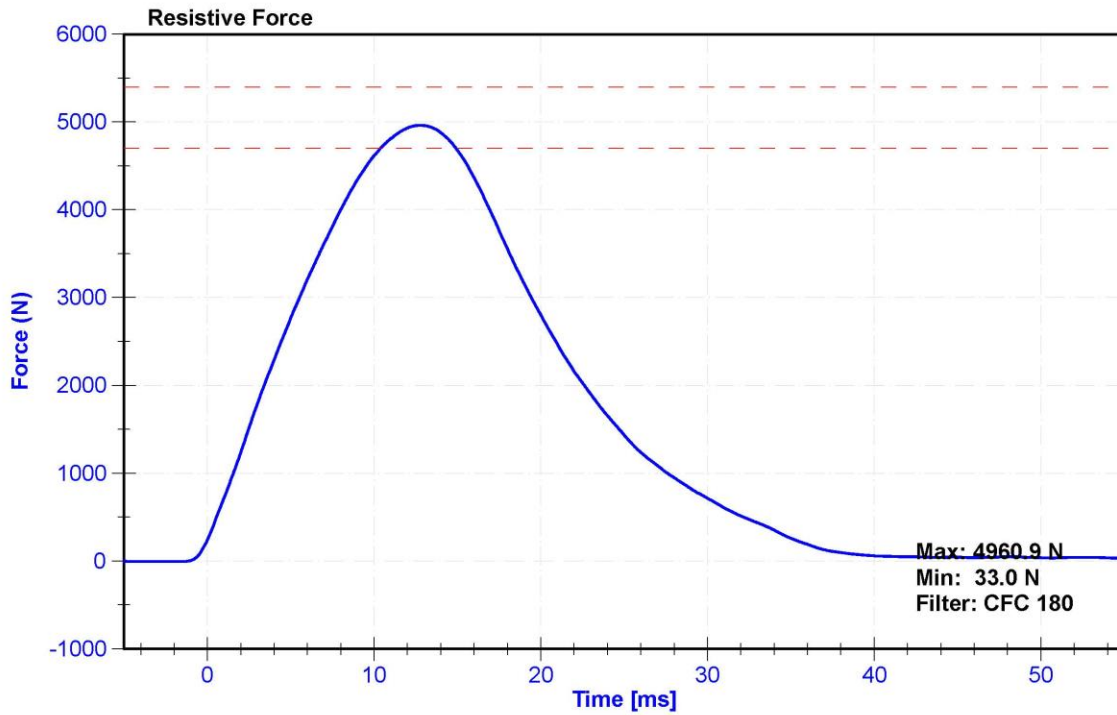

## **CALIBRATION TEST RESULTS**

### **PRE-TEST**

**SID-IIS 5<sup>TH</sup> PERCENTILE FEMALE - PASSENGER ATD**

**SERIAL No: 300**

**(CONFIGURED FOR LEFT SIDE IMPACT)**







# External Measurements - SID-IIs

Technician: K. Dutton

Date: 10/29/2019

Dummy Serial Number: 300

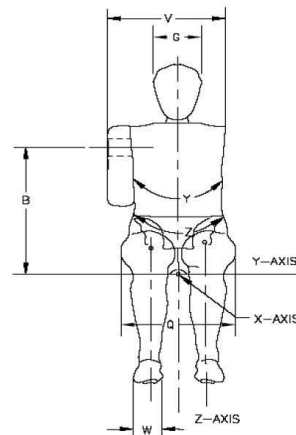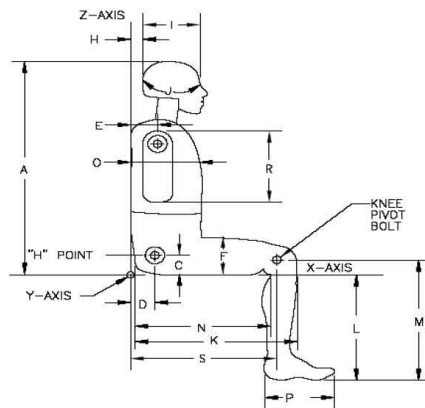

Symbol	Description	Specification (mm)		Result (mm)	Pass/Fail
A	Sitting Height	772	788	779	Pass
B	Shoulder Pivot Height	437	453	450	Pass
C	H-point Height	79	89	85	Pass
D	H-point from seatback	141	151	145	Pass
E	Shoulder Pivot from Backline	97	107	103	Pass
F	Thigh Clearance	119	135	125	Pass
G	Head Breadth	140	148	145	Pass
H	Head Back from Backline	40	46	43	Pass
I	Head Depth	178	188	185	Pass
J	Head Circumference	541	551	546	Pass
K	Buttock to Knee Length	514	540	530	Pass
L	Popliteal Height	343	369	356	Pass
M	Knee Pivot to floor height	392	409	401	Pass
N	Buttock Popliteal Length	416	442	431	Pass
O	Chest Depth w/o jacket	195	211	203	Pass
P	Foot Length	216	232	222	Pass
Q	Hip Breadth (w/pelvic plugs)	313	323	319	Pass
R	Arm Length	249	259	253	Pass
S	Knee Joint to seatback	477	493	485	Pass
V	Shoulder Width	341	357	351	Pass
W	Foot Width	78	94	84	Pass
Y	Chest Circumference w/jacket	851	881	870	Pass
Z	Waist Circumference	761	791	769	Pass


ATD Manufacturer	FTSS	Test Technician	E. Helenbrook
ATD Serial Number	300	Laboratory Supervisor	K. Brogan




#### Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21	Pass
Humidity	10	70	%	49	Pass
Resultant Acceleration	115	137	g's	124.5	Pass
Oscillation	0	15	%	1.3	Pass
Fore-Aft Acceleration	-15	15	g's	-6.3	Pass

#### Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
X Accelerometer	Endevco	P68057	10/29/2019	4/29/2020
Y Accelerometer	Endevco	P79189	10/29/2019	4/29/2020
Z Accelerometer	Endevco	P52095	10/29/2019	4/29/2020

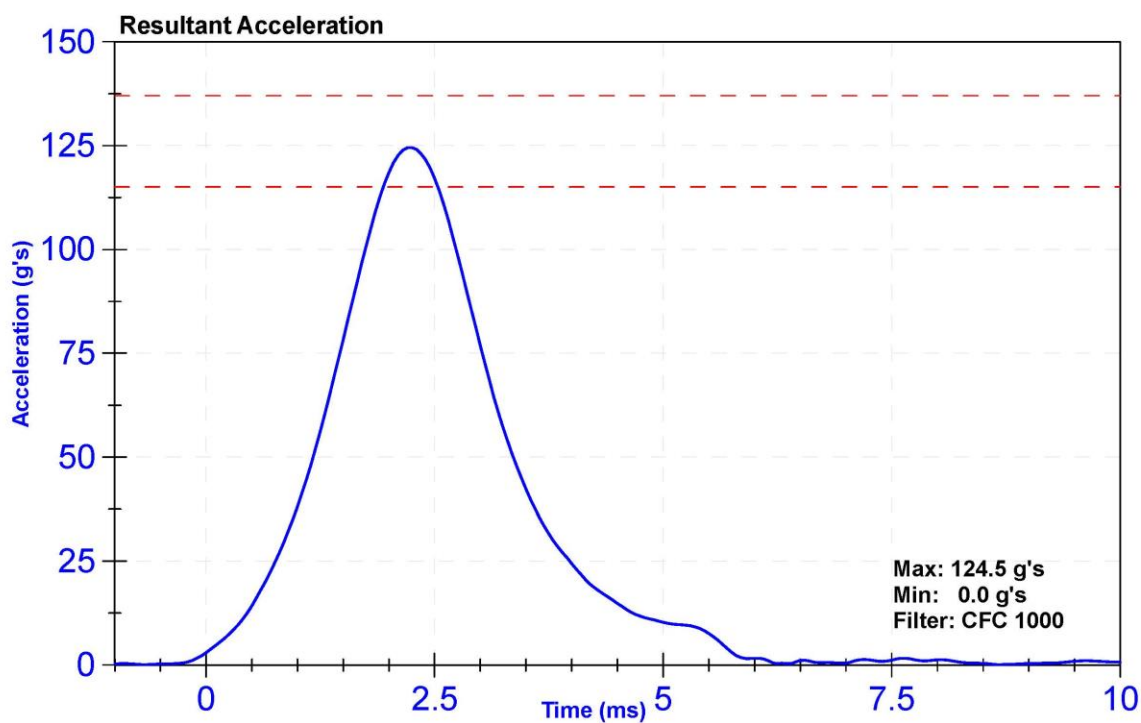

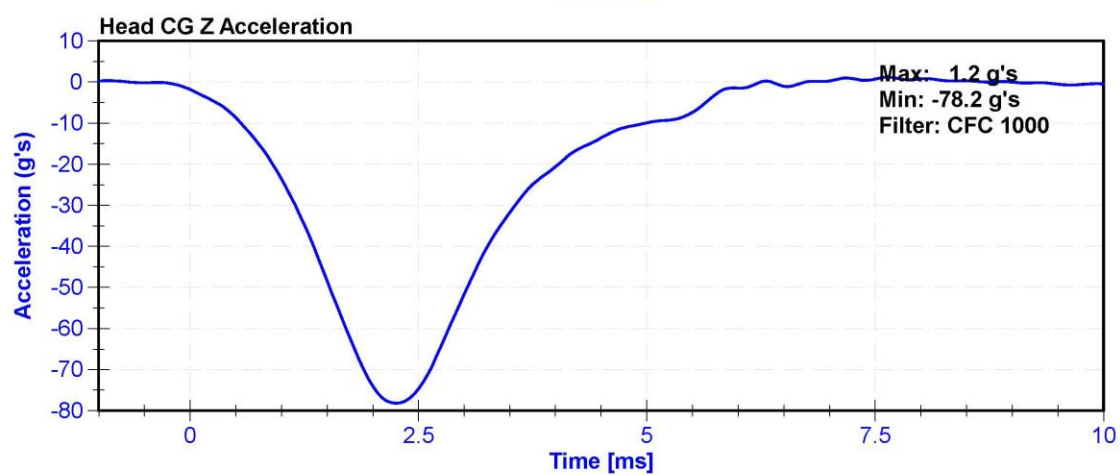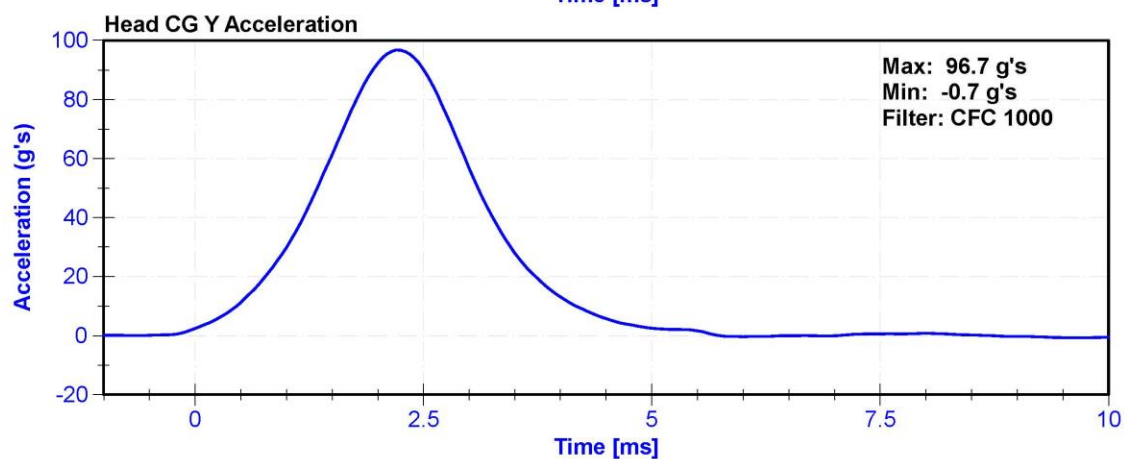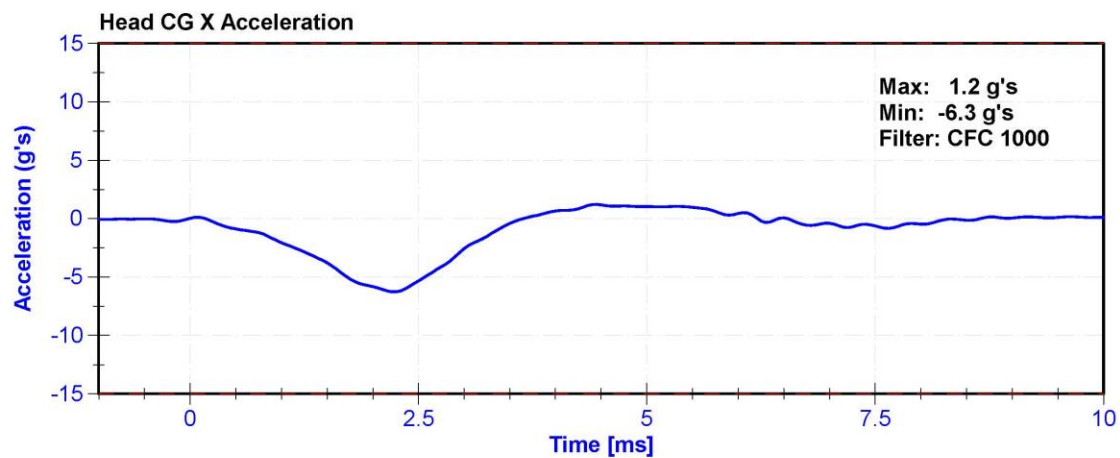




ATD Manufacturer	FTSS	Test Technician	K. Dutton
ATD Serial Number	300	Laboratory Supervisor	K. Brogan



### Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21	Pass
Humidity	10	70	%	36.3	Pass
Velocity	5.51	5.63	m/s	5.549	Pass
Pendulum Impulse at 10ms	2.2	2.8	m/s	2.21	Pass
Pendulum Impulse at 15ms	3.3	4.1	m/s	3.32	Pass
Pendulum Impulse at 20ms	4.4	5.4	m/s	4.47	Pass
Pendulum Impulse at 25ms	5.4	6.1	m/s	5.40	Pass
Pendulum Impulse from 25 to 100ms	5.5	6.2	m/s	5.99	Pass
Neck Rotation	71	81	deg	75.2	Pass
Time at Maximum Rotation	50	70	ms	59.4	Pass
Moment about the OC	36	44	Nm	42.2	Pass
Moment Decay to 0 Nm	102	126	ms	110.2	Pass

### Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	ENDEVCO 7231CT	AC-AH5M9 Pend	1/29/2019	1/29/2020
Pendulum Potentiometer	Denton 78051-342	DS-184Pend	11/1/2018	11/1/2019
Condyle Potentiometer	Denton 78051-342	DS-185Pend	11/1/2018	11/1/2019
Upper Neck Load Cell	Denton 1716A	LC-2192Fy	6/20/2019	6/19/2020

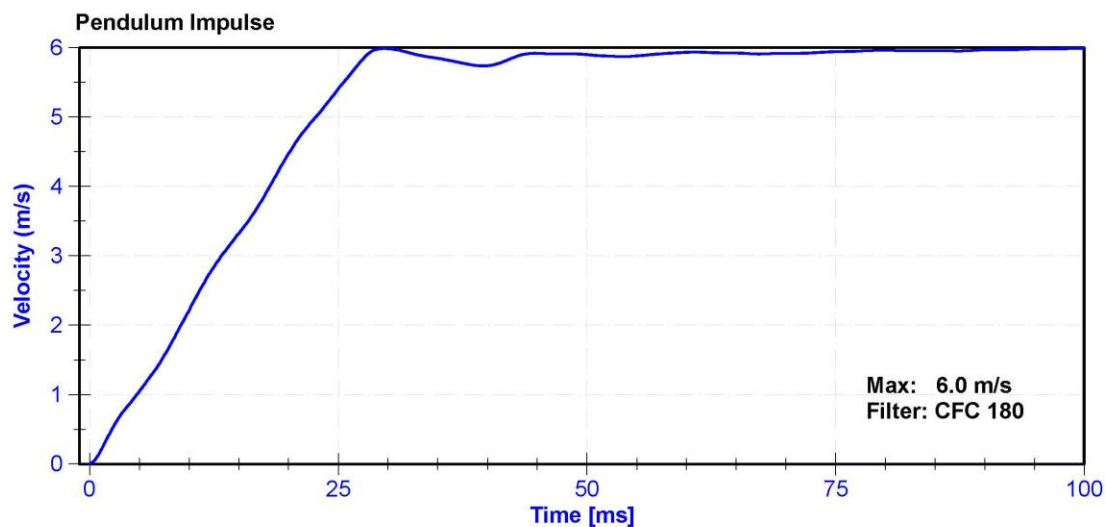

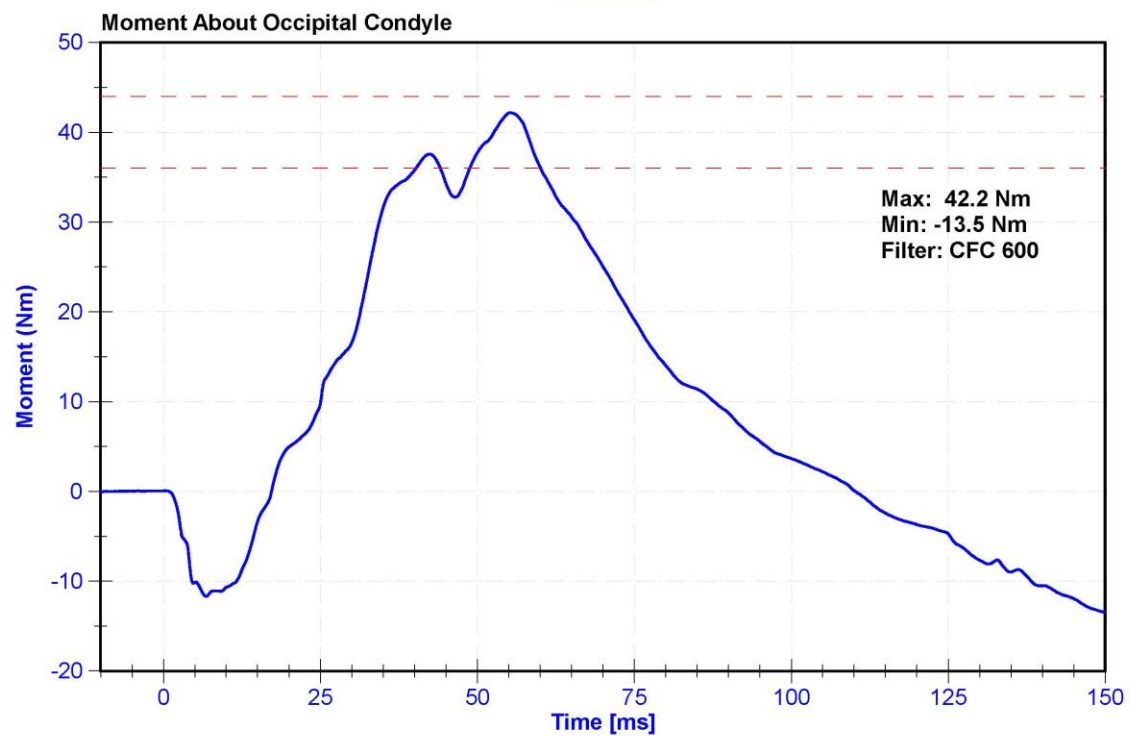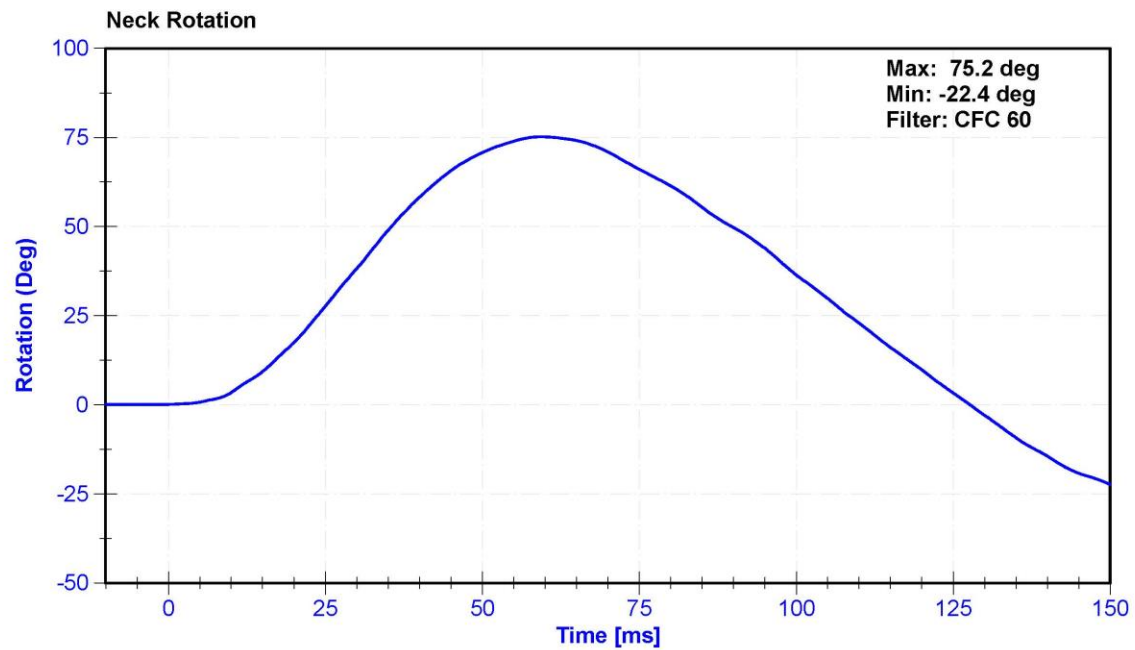


ATD Manufacturer	FTSS	Test Technician	D.Reinhard
ATD Serial Number	300	Laboratory Supervisor	K. Brogan

#### Results



Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21.2	Pass
Humidity	10	70	%	56.4	Pass
Velocity	4.2	4.4	m/s	4.40	Pass
Probe Acceleration	13	18	g's	16.3	Pass
Shoulder Deflection	28	37	mm	28.9	Pass
Lateral Upper Spine Acceleration	17	22	g's	20.4	Pass

#### Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	MSI 64C-2000	A260487	8/22/2019	2/20/2020
Shoulder Potentiometer	Servo 08CT1-3725	DS-053 GFE	10/29/2019	4/26/2020
Upper Spine Y Accelerometer	ENDEVCO 7264CT	AC-P51668	5/6/2019	11/4/2019

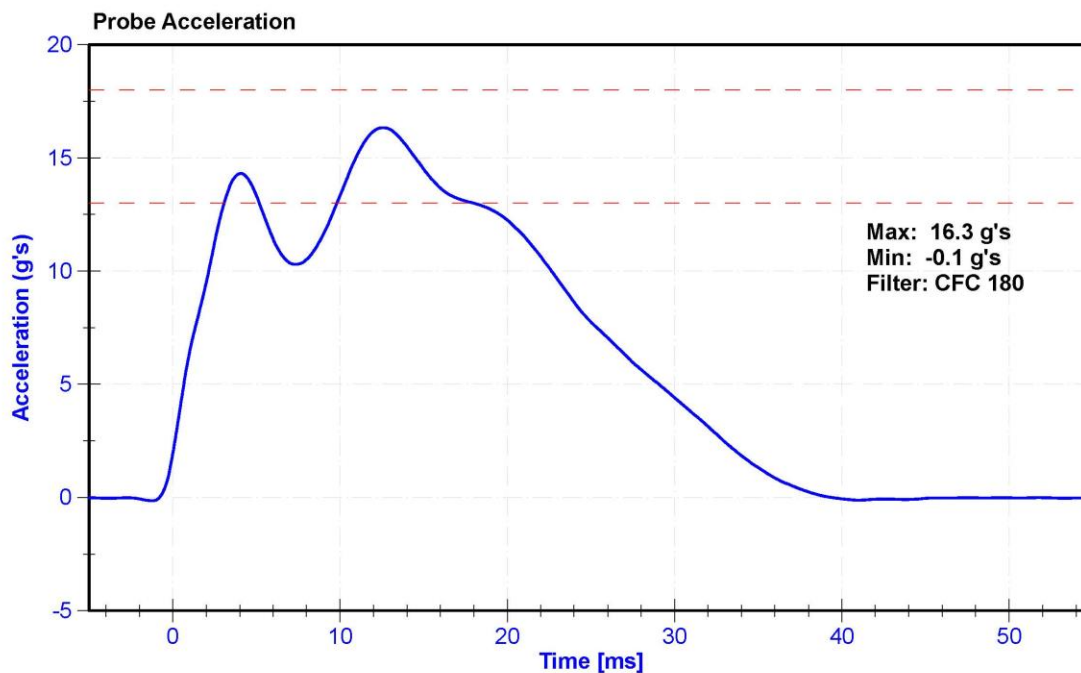



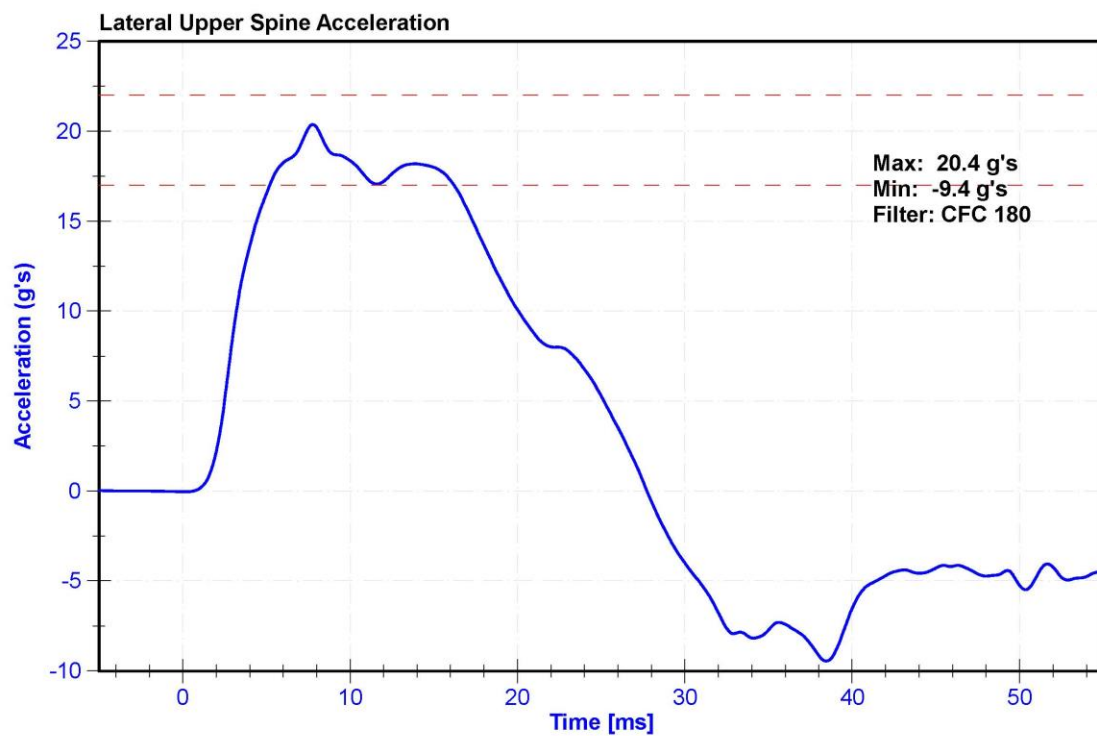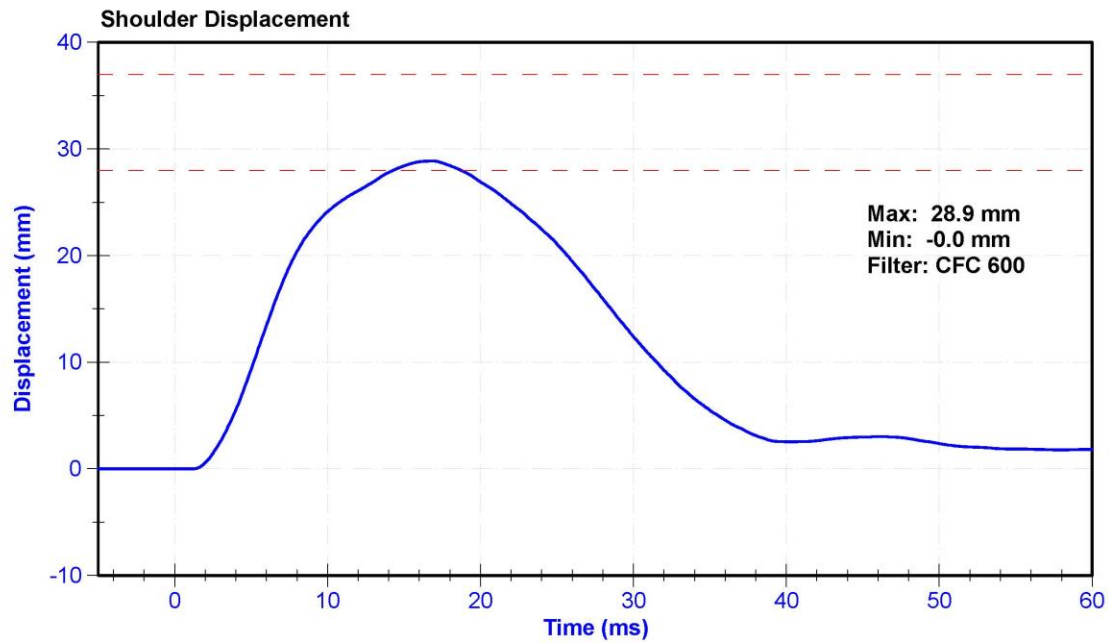


ATD Manufacturer	FTSS	Test Technician	D.Reinhard
ATD Serial Number	300	Laboratory Supervisor	K. Brogan


#### Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	22.0	Pass
Humidity	10	70	%	57.0	Pass
Velocity	6.6	6.8	m/s	6.74	Pass
Probe Acceleration after 5 ms	30	36	g's	33.9	Pass
Lateral Upper Spine Acceleration	34	43	g's	37.1	Pass
Lateral Lower Spine Acceleration	29	37	g's	34.7	Pass
Shoulder Deflection	31	40	mm	34.0	Pass
Upper Thorax Rib Deflection	25	32	mm	25.4	Pass
Mid Thorax Rib Deflection	30	36	mm	30.2	Pass
Lower Thorax Rib Deflection	32	38	mm	32.5	Pass



#### Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	MSI 64C-2000	A260487	8/22/2019	2/20/2020
Upper Spine T1 Y Accelerometer	ENDEVCO 7264CT	AC-P51668	5/6/2019	11/4/2019
Upper Spine T12 Y Accelerometer	ENDEVCO 7264	AC-P64147	10/29/2019	4/28/2020
Shoulder Potentiometer	Servo 08CT1-3725	DS-053 GFE	10/29/2019	4/26/2020
Upper Thorax Rib Potentiometer	Servo 08CT1-3725	DS-451GFE	10/29/2019	10/28/2020
Middle Thorax Rib Potentiometer	Servo 08TC1-3745	DS-040GFE	10/29/2019	10/28/2020
Lower Thorax Rib Potentiometer	Servo 08TC1-3725	DS-1156GFE	10/29/2019	10/28/2020

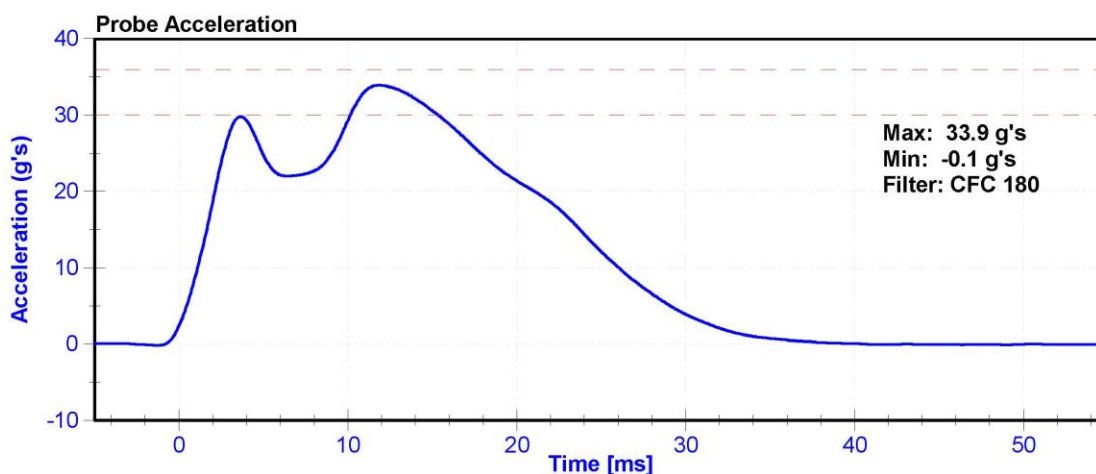

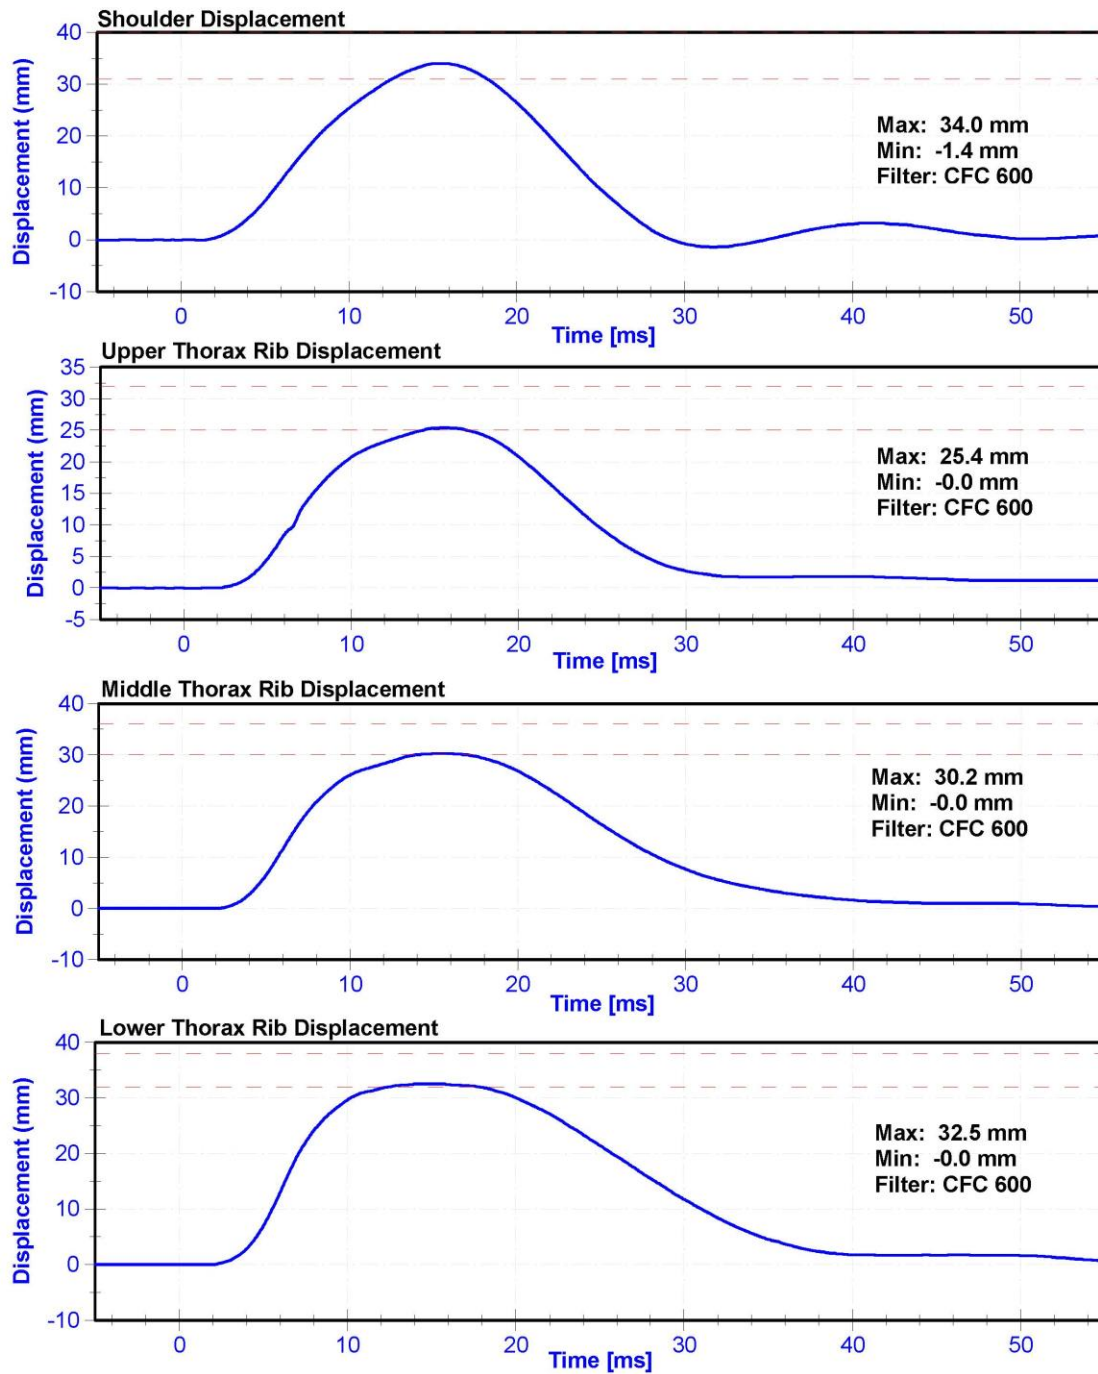



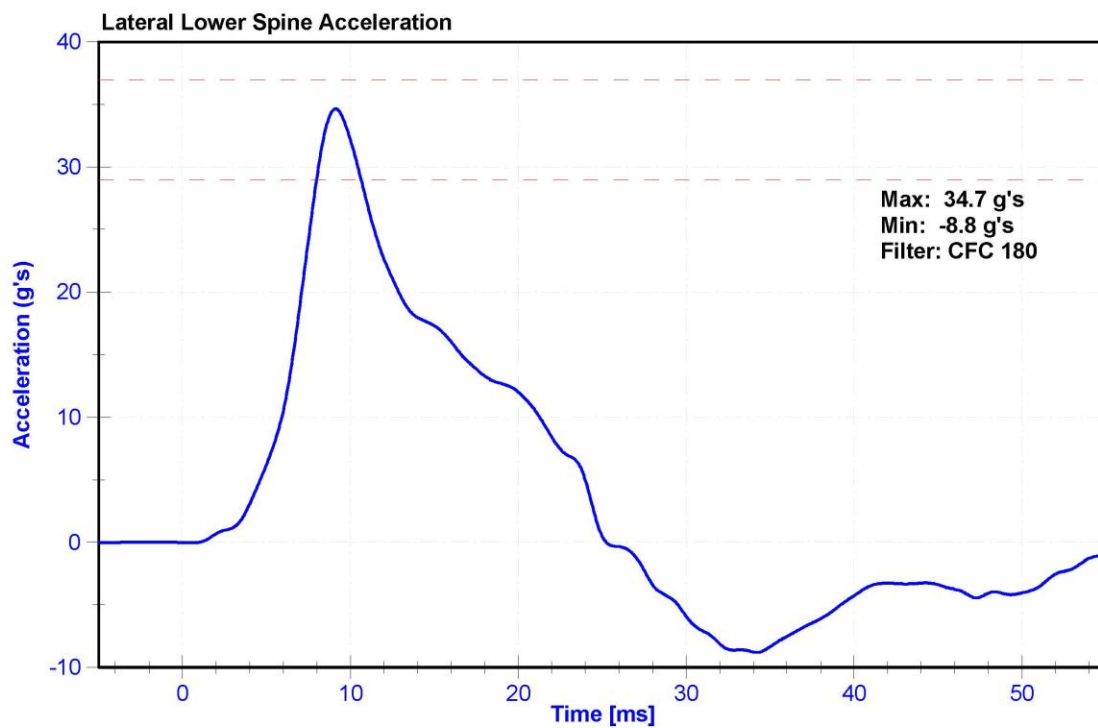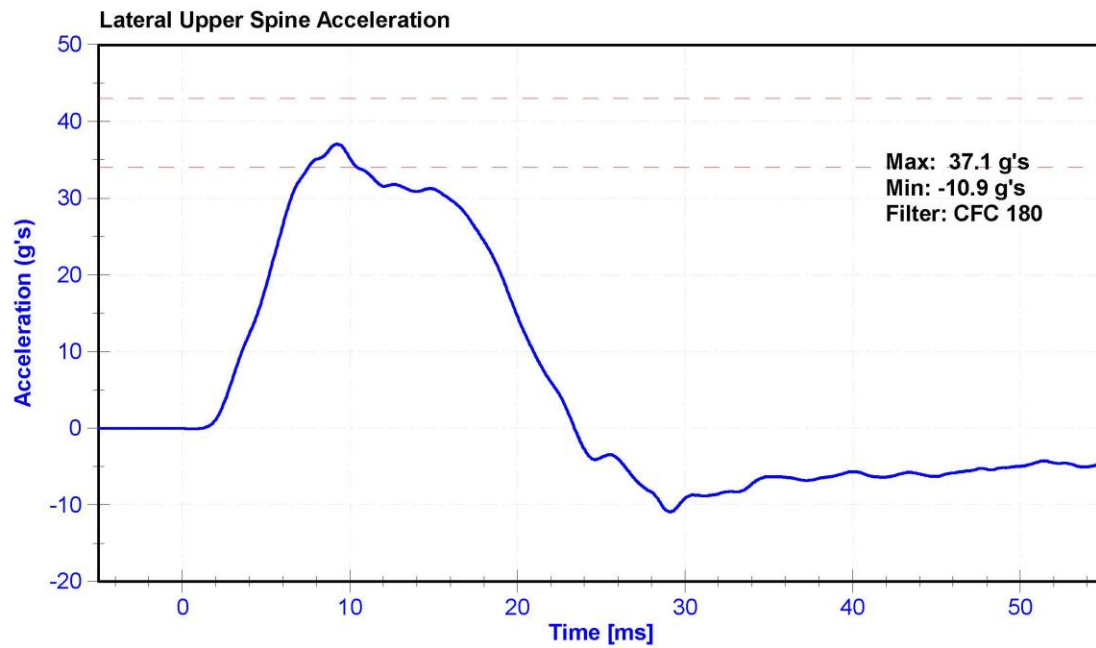


ATD Manufacturer	FTSS	Test Technician	D.Reinhard
ATD Serial Number	300	Laboratory Supervisor	K. Brogan




#### Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21.6	Pass
Humidity	10	70	%	58	Pass
Velocity	4.2	4.4	m/s	4.40	Pass
Probe Acceleration	14	18	g's	16.4	Pass
Lateral Upper Spine Acceleration	13	17	g's	13.4	Pass
Lateral Lower Spine Acceleration	7	11	g's	9.4	Pass
Upper Thorax Rib Deflection	32	40	mm	34.7	Pass
Middle Thorax Rib Deflection	39	45	mm	41.4	Pass
Lower Thorax Rib Deflection	35	43	mm	37.8	Pass



#### Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	MSI 64C-2000	A260487	8/22/2019	2/20/2020
Upper Spine Y Accelerometer	ENDEVCO 7264CT	AC-P51668	5/6/2019	11/4/2019
Lower Spine Y Accelerometer	ENDEVCO 7264	AC-P64147	10/29/2019	4/28/2020
Upper Thorax Rib Potentiometer	Servo 08CT1-3725	DS-451GFE	10/29/2019	10/28/2020
Middle Thorax Rib Potentiometer	Servo 08TC1-3745	DS-040GFE	10/29/2019	10/28/2020
Lower Thorax Rib Potentiometer	Servo 08TC1-3725	DS-1156GFE	10/29/2019	10/28/2020

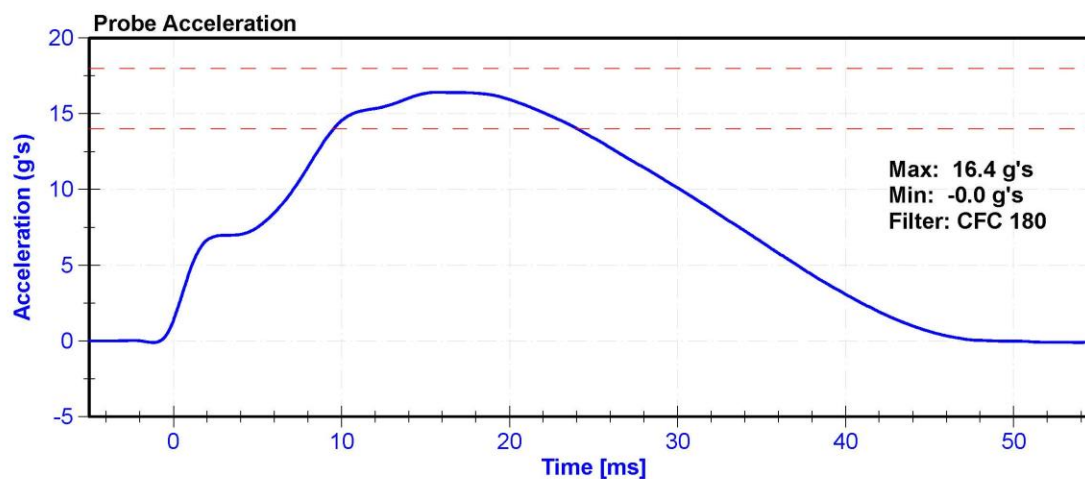

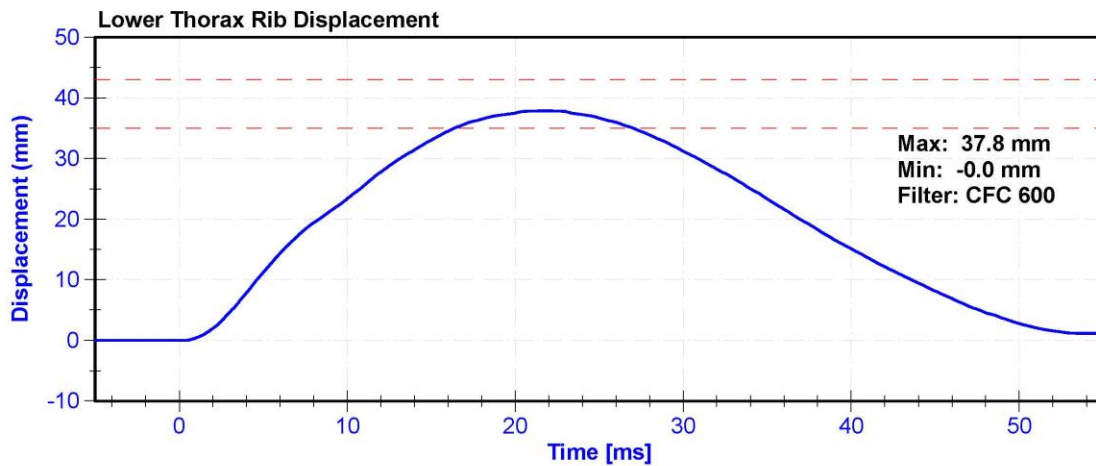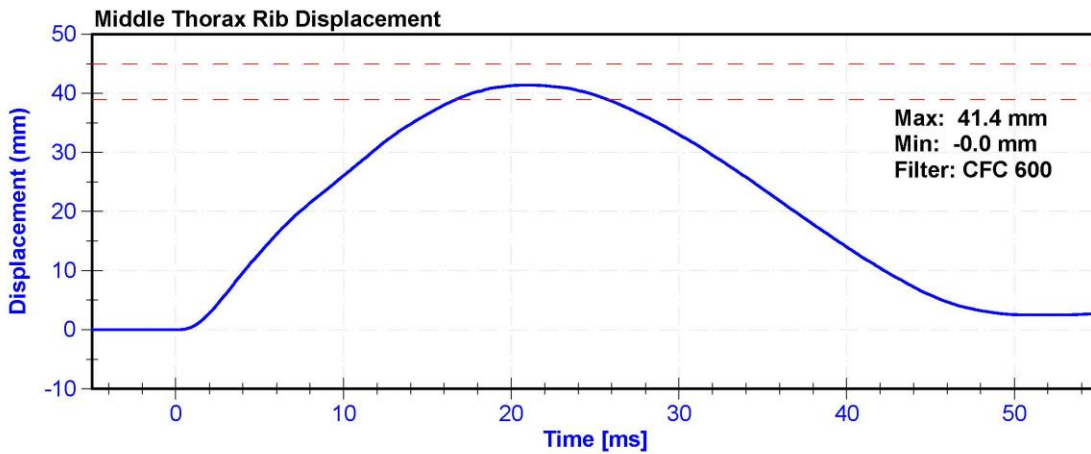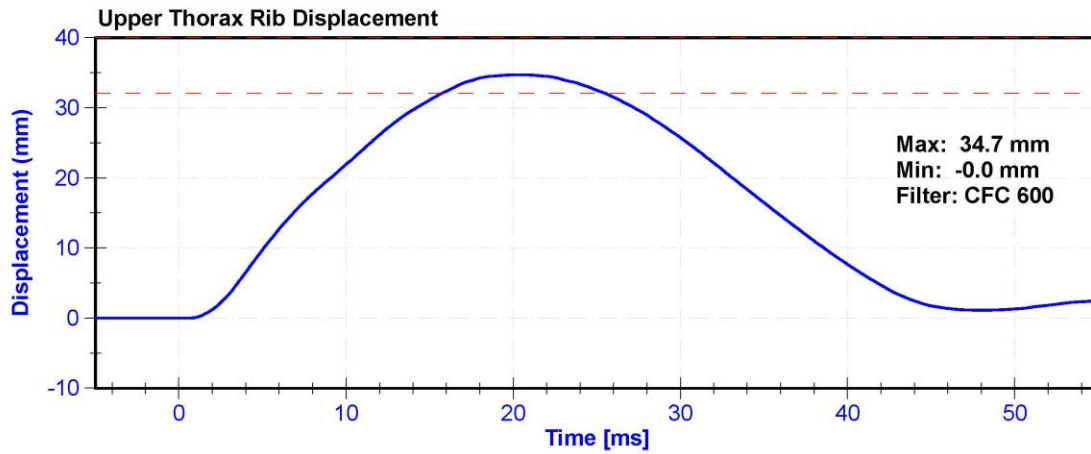



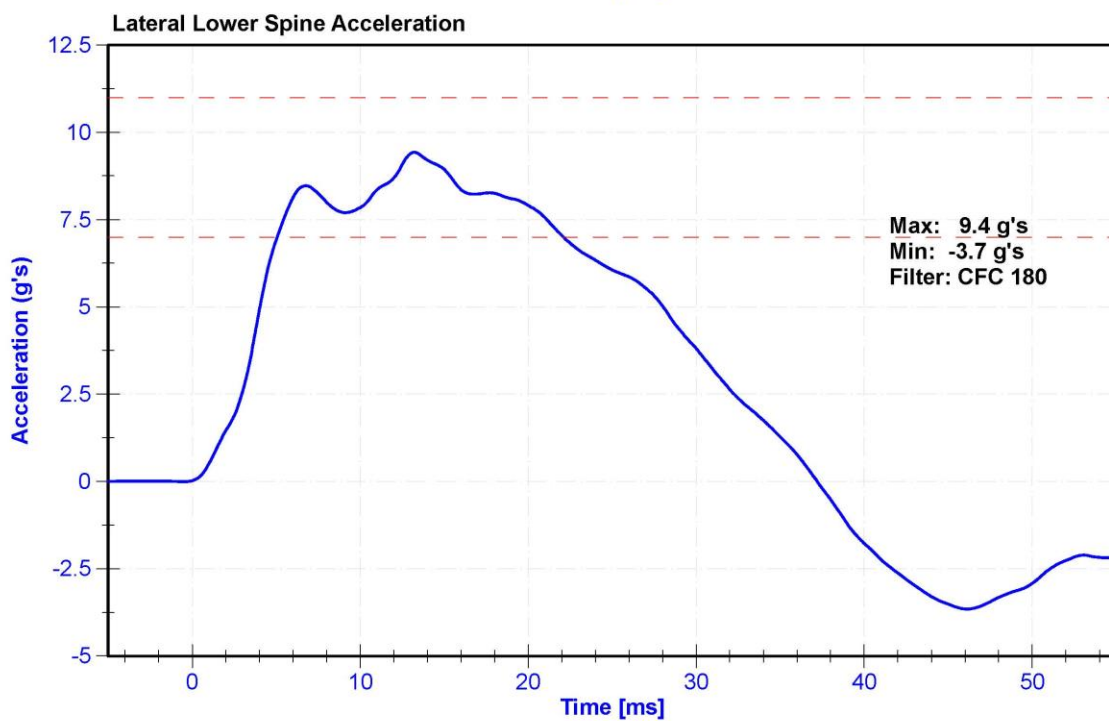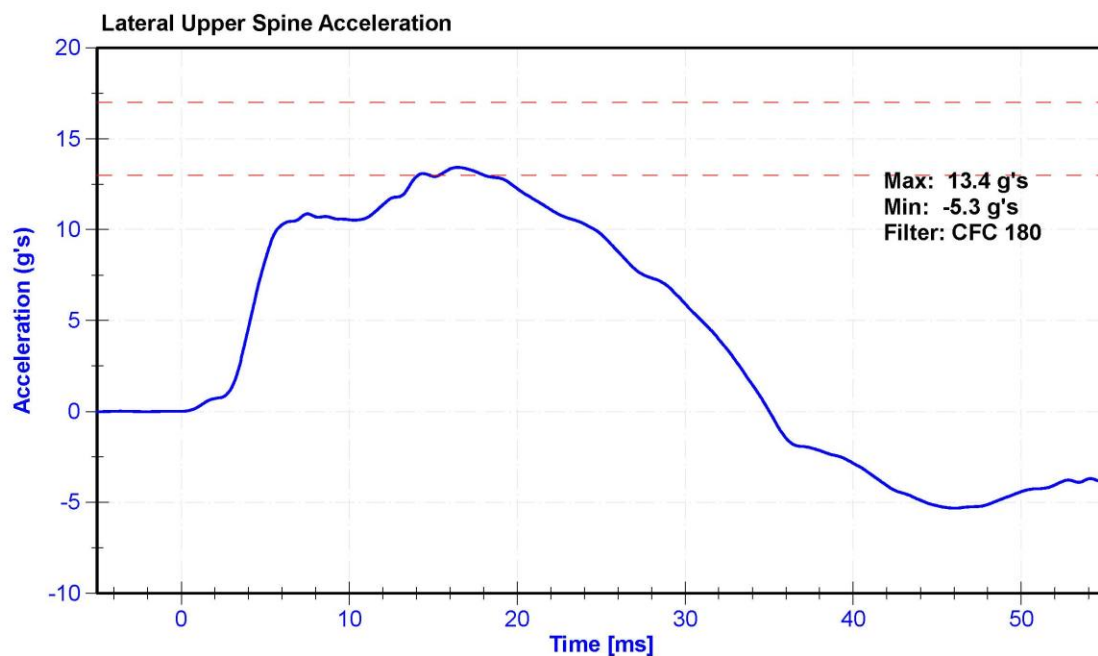


ATD Manufacturer	FTSS	Test Technician	D.Reinhard
ATD Serial Number	300	Laboratory Supervisor	K. Brogan



#### Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21.4	Pass
Humidity	10	70	%	60.3	Pass
Velocity	4.2	4.4	m/s	4.40	Pass
Probe Acceleration	12	16	g's	14.7	Pass
Lateral Lower Spine Acceleration	9	14	g's	11.6	Pass
Upper Abdomen Rib Deflection	36	47	mm	45.0	Pass
Lower Abdomen Rib Deflection	33	44	mm	40.1	Pass


#### Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Probe Accelerometer	MSI 64C-2000	A260487	8/22/2019	2/20/2020
Lower Spine Y Accelerometer	ENDEVCO 7264	AC-P64147	10/29/2019	4/28/2020
Upper Abdomen Rib Potentiometer	Servo 08CT1-3725	DS-308GFE	10/29/2019	4/28/2020
Lower Abdomen Rib Potentiometer	Servo 08CT1-3725	DS-307GFE	10/29/2019	4/28/2020

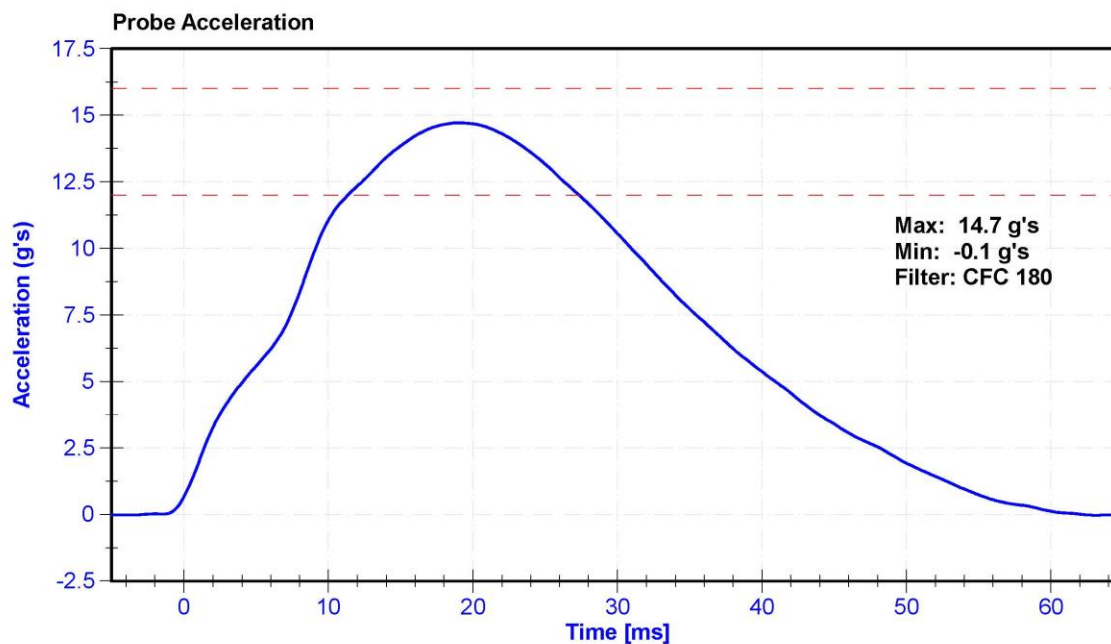

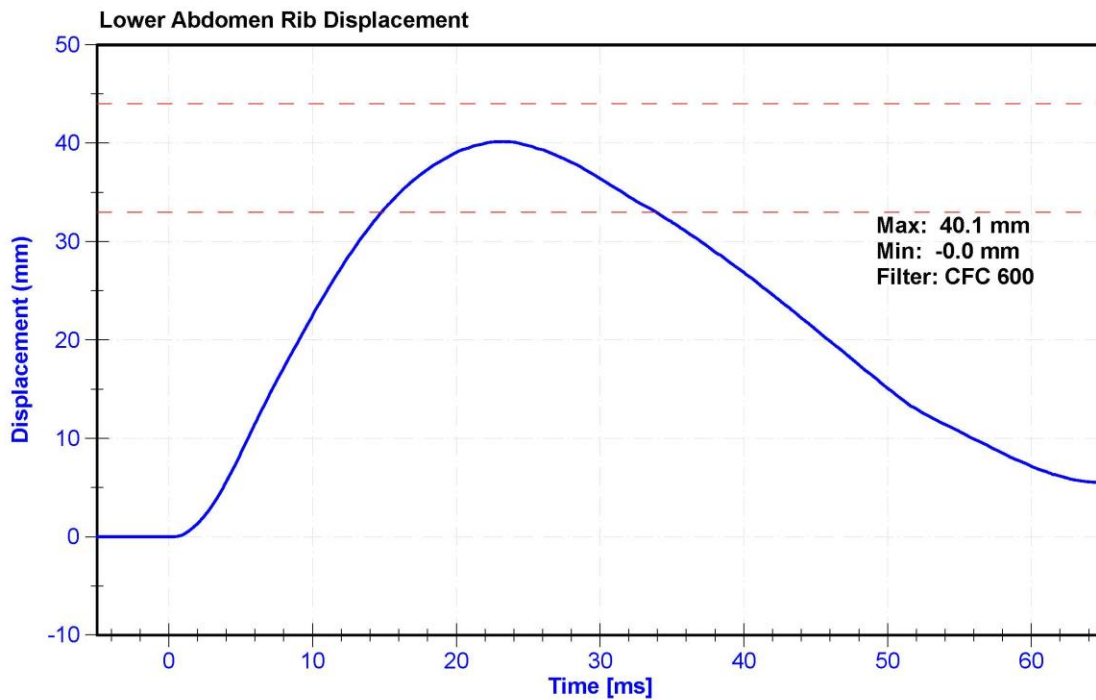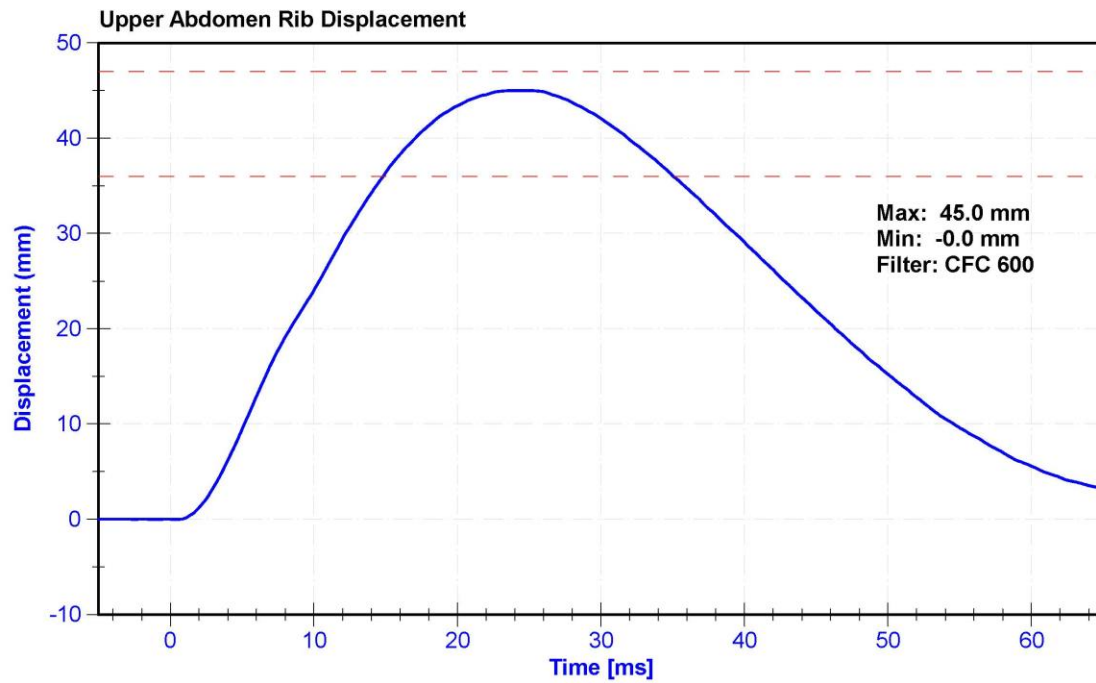



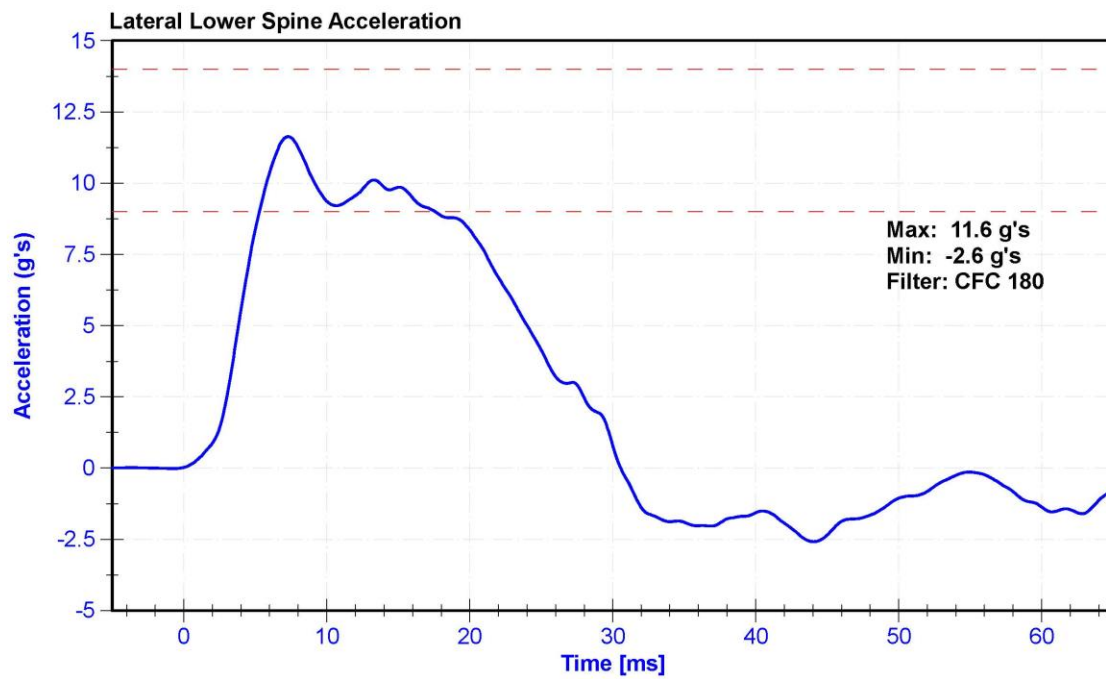


ATD Manufacturer	FTSS	Test Technician	D.Reinhard
ATD Serial Number	300	Laboratory Supervisor	K. Brogan



#### Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21.2	Pass
Humidity	10	70	%	37.4	Pass
Velocity	6.6	6.8	m/s	6.63	Pass
Probe Acceleration	38	47	g's	44.8	Pass
Lateral Pelvis Acceleration after 6ms	34	42	g's	40.9	Pass
Acetabulum Force	3600	4300	N	3720.0	Pass

#### Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	MSI 64C-2000	A260487	8/22/2019	2/20/2020
Pelvis Y Accelerometer	ENDEVCO 7264CT	AC-P51731	10/29/2019	4/28/2020
Acetabulum Load Cell	Denton 3249J	LC-276Fy	9/24/2019	9/23/2020
Certification Plug	SACO	11479	8/30/2016	N/A
Crash Test Plug	SACO	12318	3/21/2018	N/A

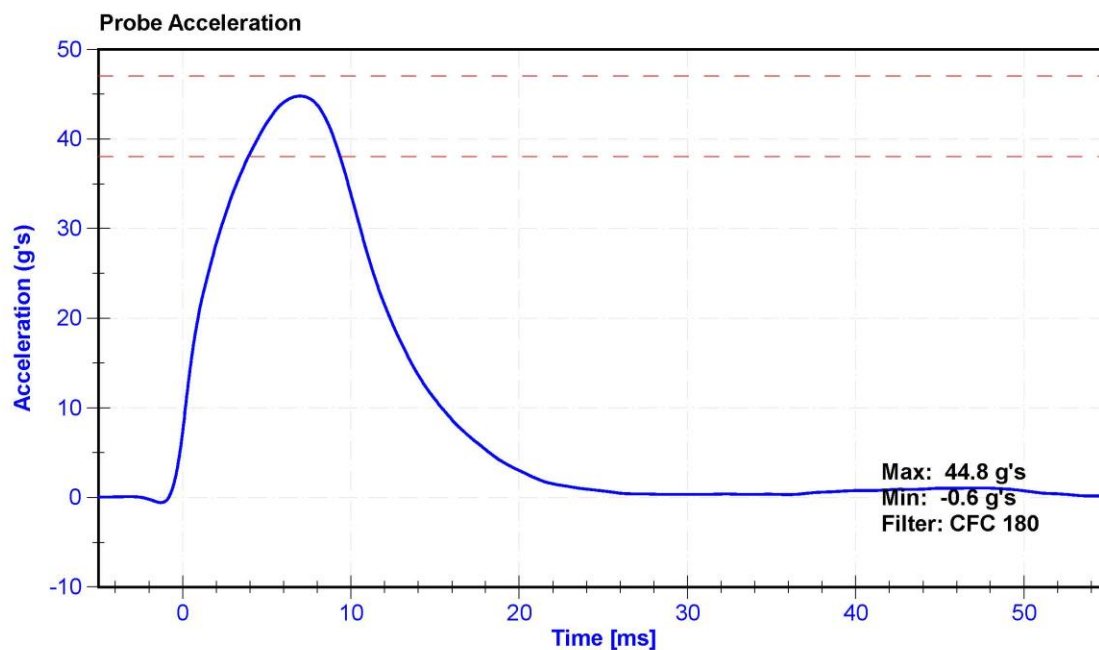

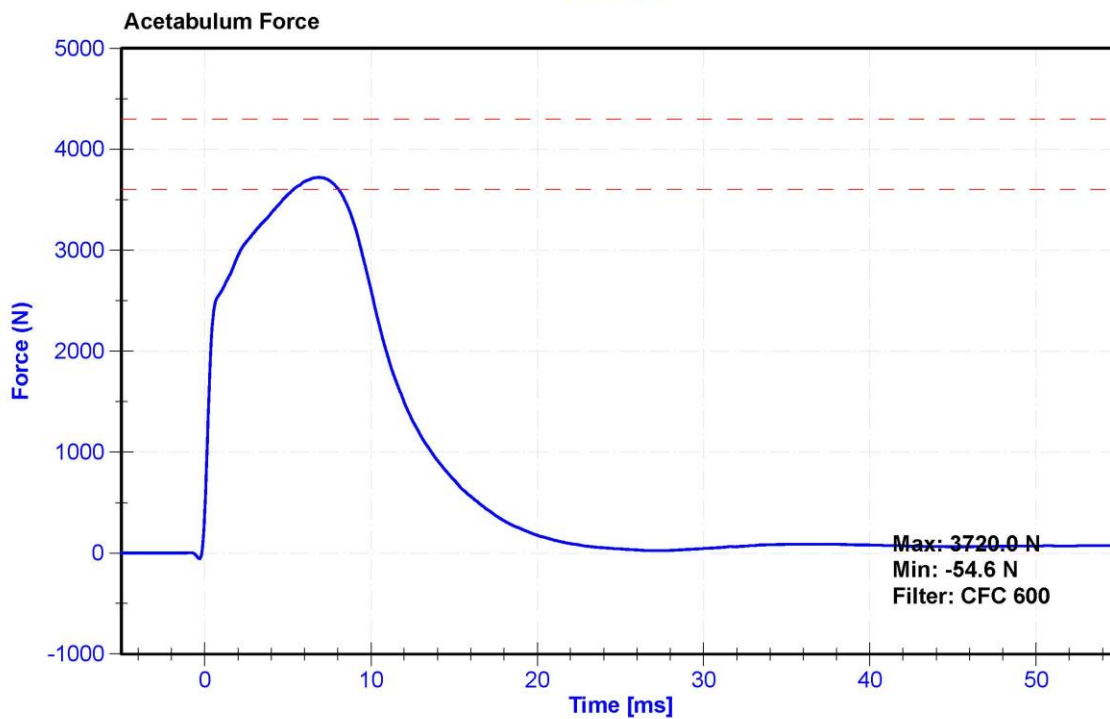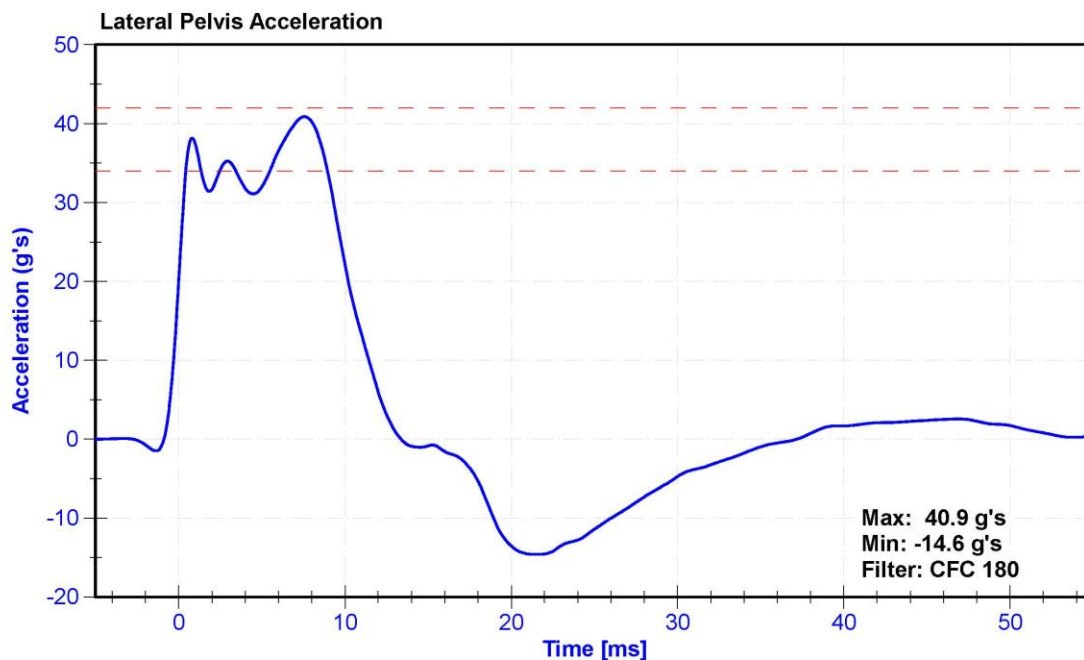



# SID-ILs Pelvis Plug Certification Test

Plug S/N 11479

Test Number 2967

Report Number 2964

Test Date 8/30/2016 11:42:08 AM

Test Results	Spec Min	Spec Max
Force @ 0.5 mm (N)	252.33	600.00
Force @ 1.5 mm (N)	1,100.74	1,400.00
Force @ 2.5 mm (N)	1,408.38	1,618.00
Force @ 3.0 mm (N)	1,464.63	1,673.00


Testing Machine STM-20 5965542

Load Cell S/N (T1240813), Units (LBS ) 1000

Crosshead Speed ( mm / min ) or Rate 12.7  
Extension or Position Measured by XHD\_100 ( XHD100 )

Notes:

Force (-N) vs Extension (-mm)

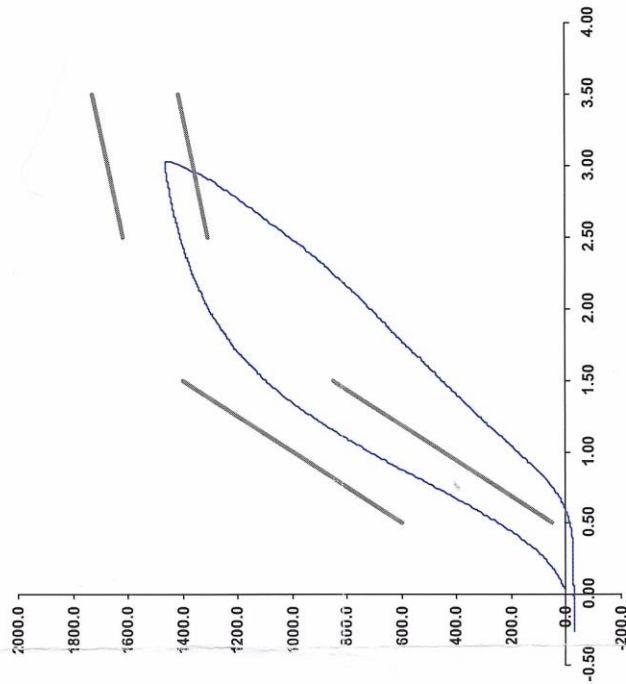

Operator DC

Part Number 180-4450

Template No 107 30-Aug-16

SACO Research

By : DC Date : 8/30/16

SACO Research 41735 Elm St, #401 Murrieta, CA 92562 Tel 310-694-2082 FAX





Crash 300 11/1/19

# SID-Its Pelvis Plug Certification Test

Plug S/N 12318

Test Number 6703

Report Number 6718

Test Date 3/21/2018 12:28:02 PM

Test Results	Spec Min	Spec Max
Force @ 0.5 mm (N)	50.00	600.00
Force @ 1.5 mm (N)	850.00	1,400.00
Force @ 2.5 mm (N)	1,306.00	1,618.00
Force @ 3.0 mm (N)	1,361.00	1,673.00


Testing Machine STM-20 5965542

Load Cell S/N (F1360947), Units (LBS ) 1000

Crosshead Speed ( mm / min ) or Rate 12.7  
Extension or Position Measured by XHD\_100 ( XHD100 )

Notes:

Force (-N) vs Extension (-mm)

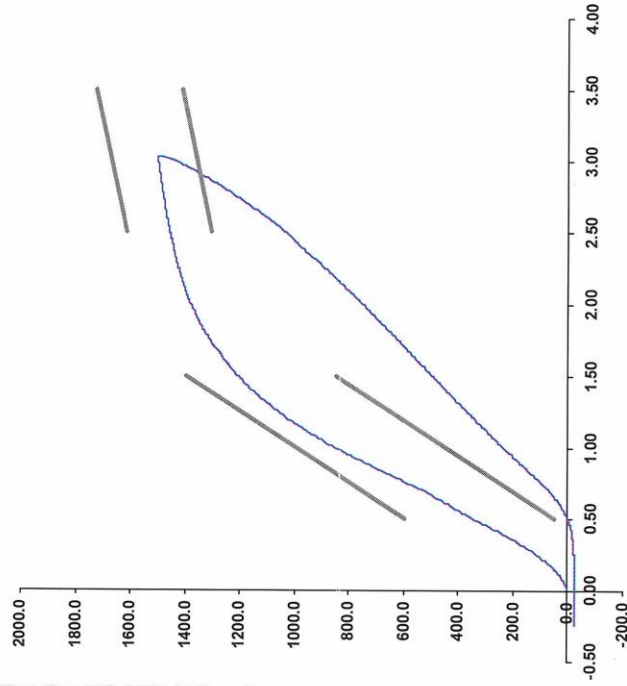

Template No 107 SACO Research	22-Mar-18	Operator Part Number 180-4450
----------------------------------	-----------	----------------------------------

By : bc Date : 3/21/18

SACO Research 41735 Elm St, #401 Murrieta, CA 92562 Tel 310-694-2082 FAX


ATD Manufacturer	FTSS	Test Technician	K. Brogan
ATD Serial Number	300	Laboratory Supervisor	D.Reinhard


#### Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21.7	Pass
Humidity	10	70	%	39.0	Pass
Velocity	4.2	4.4	m/s	4.40	Pass
Probe Acceleration	36	45	g's	38.5	Pass
Lateral Pelvis Acceleration	28	39	g's	28.3	Pass
Iliac Force	4100	5100	N	4274.5	Pass

#### Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	MSI 64C-2000	A260487	8/22/2019	2/20/2020
Pelvis Y Accelerometer	ENDEVCO 7264CT	AC-P51731	10/29/2019	4/28/2020
Iliac Load Cell	DENTON 3228J	LC-280Fy	6/20/2019	6/19/2020

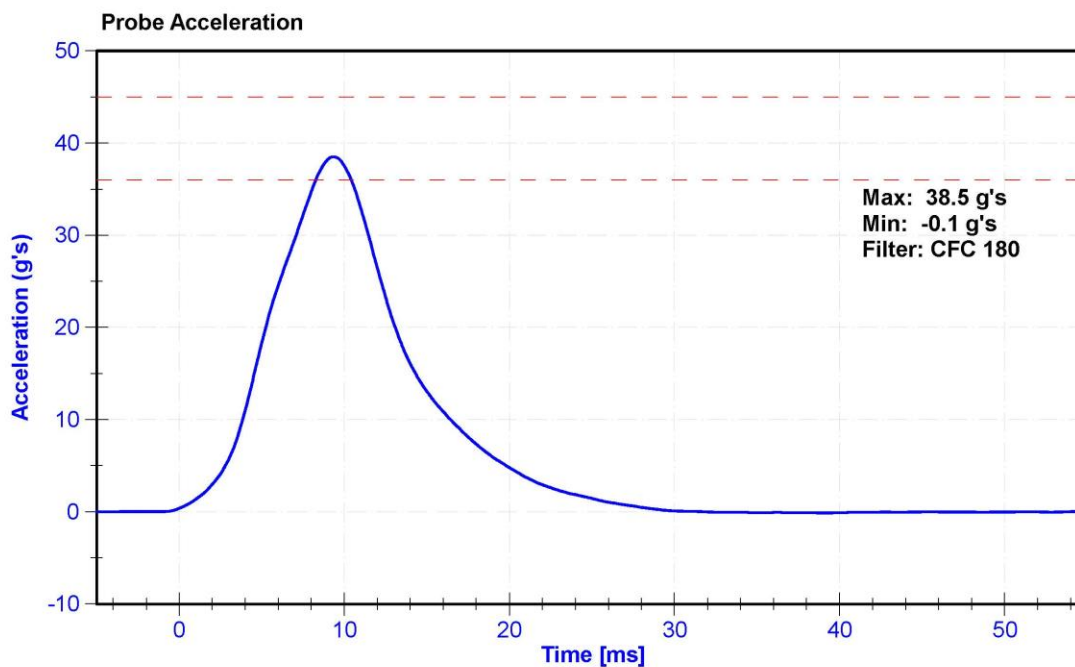

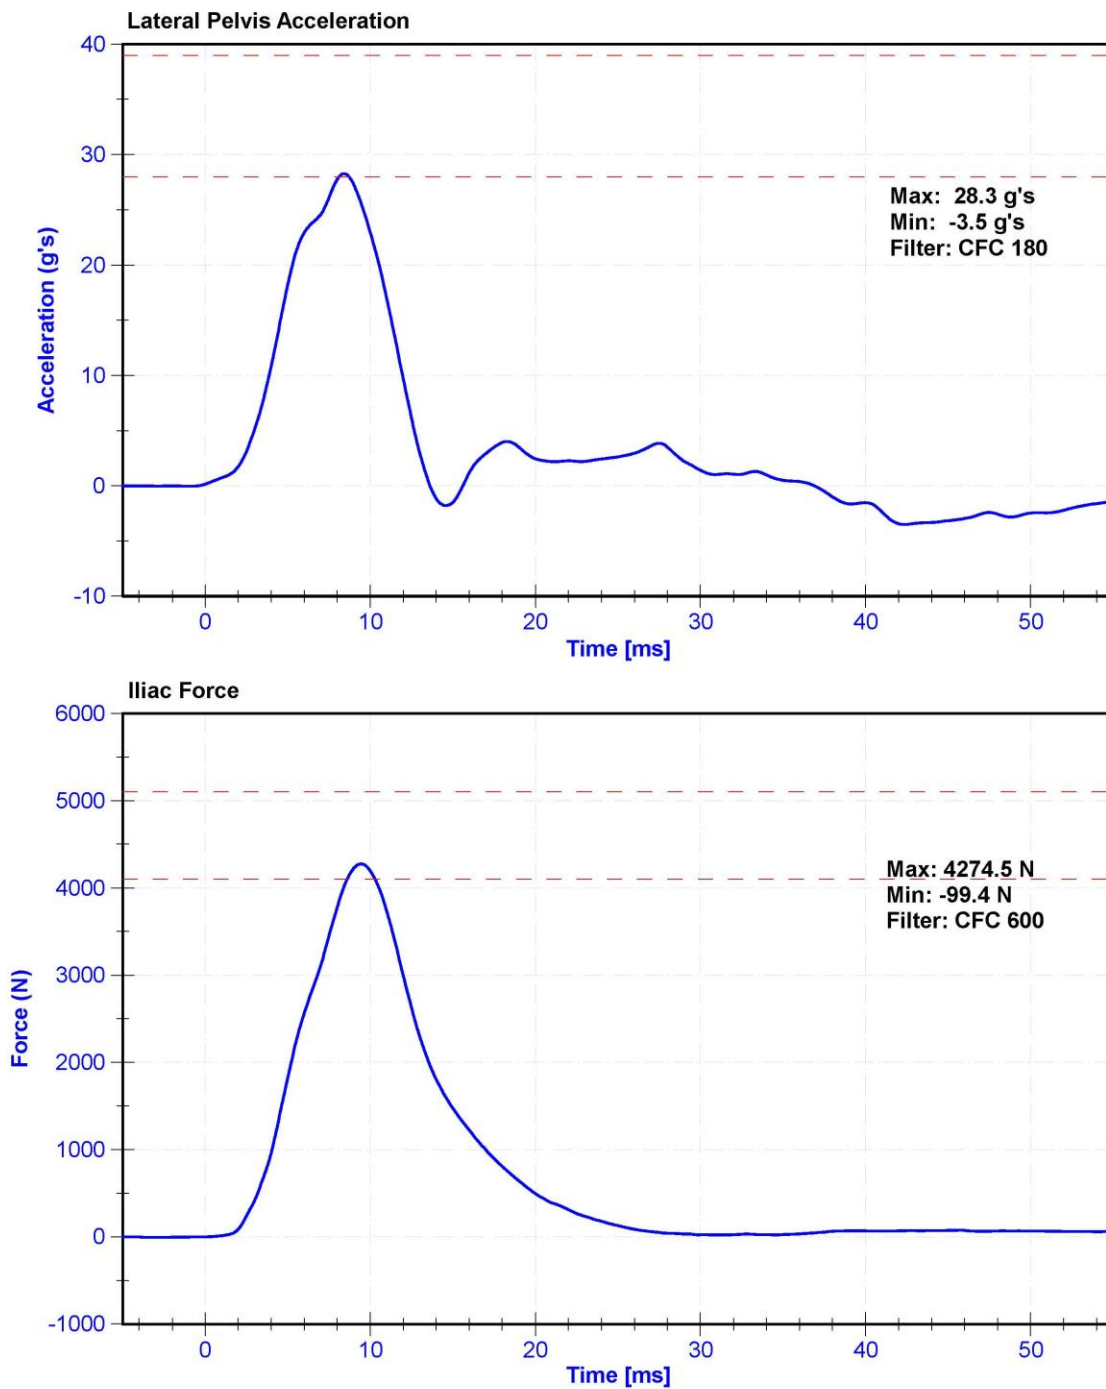

**CALIBRATION TEST RESULTS**

**POST-TEST**

**EUROSID 2 (ES-2RE) MALE – DRIVER ATD**

**SERIAL NO: F034**

**(CONFIGURED FOR LEFT SIDE IMPACT)**






## External Measurements - EuroSID-2re

Technician: K. Dutton

Date: 11/05/2019

Dummy Serial Number: F034

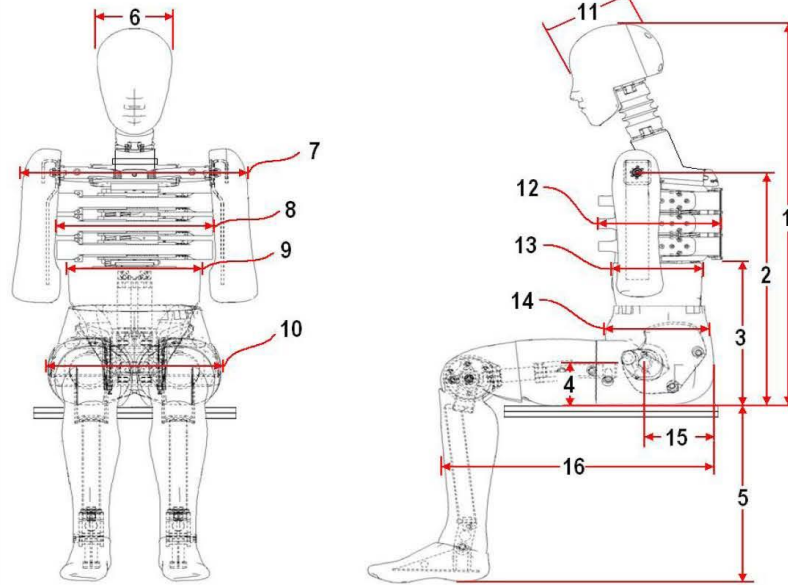

FRONT VIEW

SIDE VIEW

Dim. No.	Description	Specification (mm)		Result (mm)	Pass/Fail
1	Sitting Height	900	918	910	Pass
2	Seat to Shoulder Joint	558	572	569	Pass
3	Seat to Lower Face of Thoracic Spine Box	346	356	352	Pass
4	Seat to Hip Joint (center of bolt)	97	103	99	Pass
5	Sole to Seat, Sitting	333	451	419	Pass
6	Head Width	152	158	154	Pass
7	Shoulder/Arm Width	461	479	472	Pass
8	Thorax Width	322	332	327	Pass
9	Abdomen Width	273	287	283	Pass
10	Pelvis Lap Width	359	373	366	Pass
11	Head Depth	196	206	202	Pass
12	Thorax Depth	262	272	269	Pass
13	Abdomen Depth	194	204	201	Pass
14	Pelvis Depth	235	245	242	Pass
15	Back of Buttocks to Hip Joint (center of bolt)	150	160	155	Pass
16	Back of Buttocks to Front Knee	597	615	609	Pass


ATD Manufacturer	FTSS	Test Technician	E. Helenbrook
ATD Serial Number	F034	Laboratory Supervisor	K. Brogan


#### Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21.2	Pass
Humidity	10	70	%	27.8	Pass
Resultant Acceleration	125	155	g's	132.4	Pass
Oscillation	0	15	%	12.20	Pass
Fore-Aft Acceleration	-15	15	g's	10.3	Pass

#### Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
X Accelerometer	Endevco	P49204	10/29/2019	4/29/2020
Y Accelerometer	Endevco	P63981	10/29/2019	4/29/2020
Z Accelerometer	Endevco	P64007	10/29/2019	4/29/2020

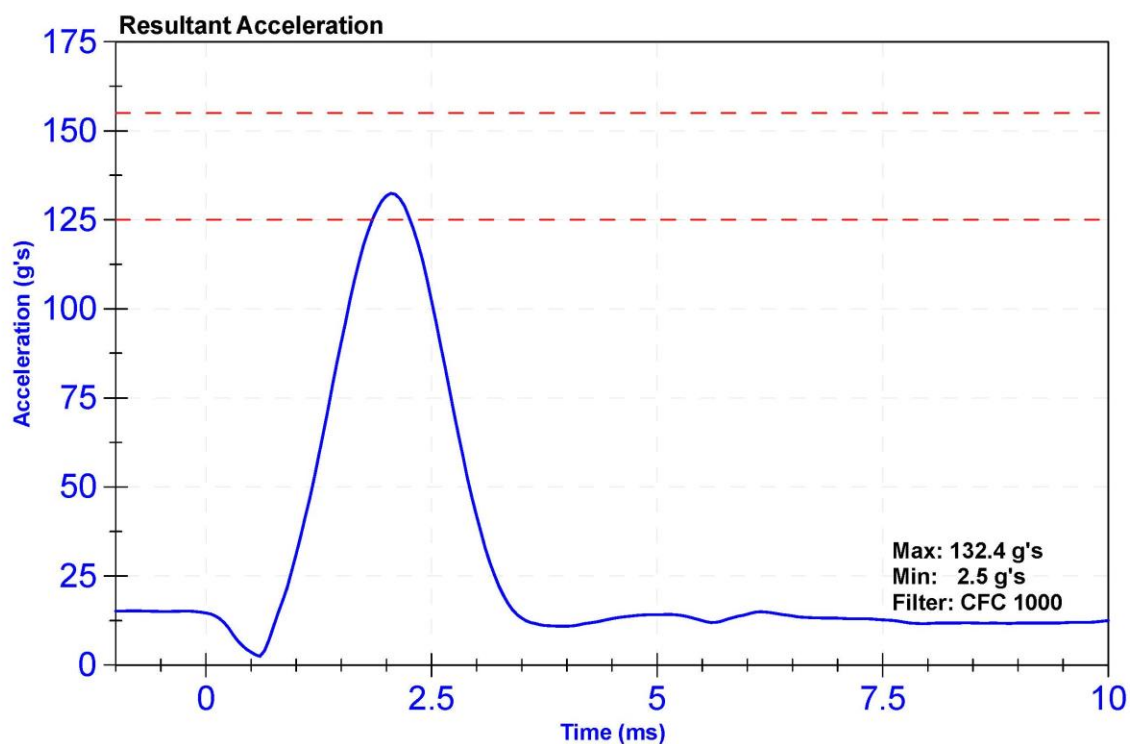

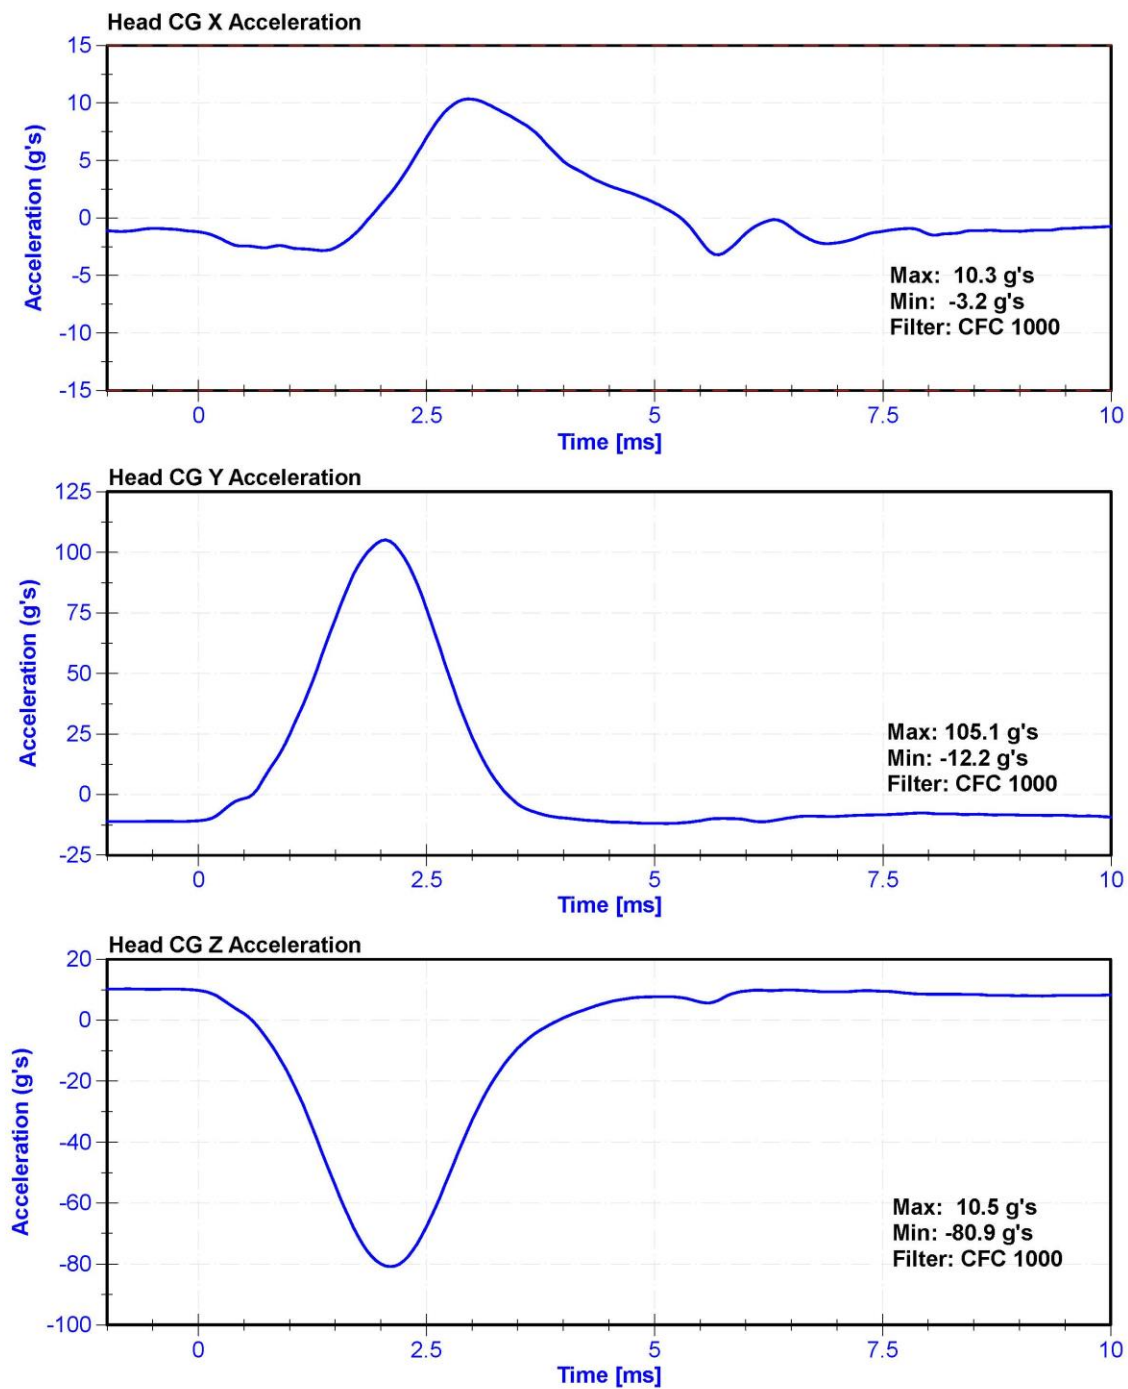


ATD Manufacturer	FTSS	Test Technician	D.Reinhard
ATD Serial Number	F034	Laboratory Supervisor	K. Brogan

#### Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21.5	Pass
Humidity	10	70	%	28.0	Pass
Velocity	4.2	4.4	m/s	4.23	Pass
Probe Acceleration	7.5	10.5	g's	9.24	Pass

#### Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Probe Accelerometer	MSI 64C-2000	A260487	8/22/2019	2/20/2020

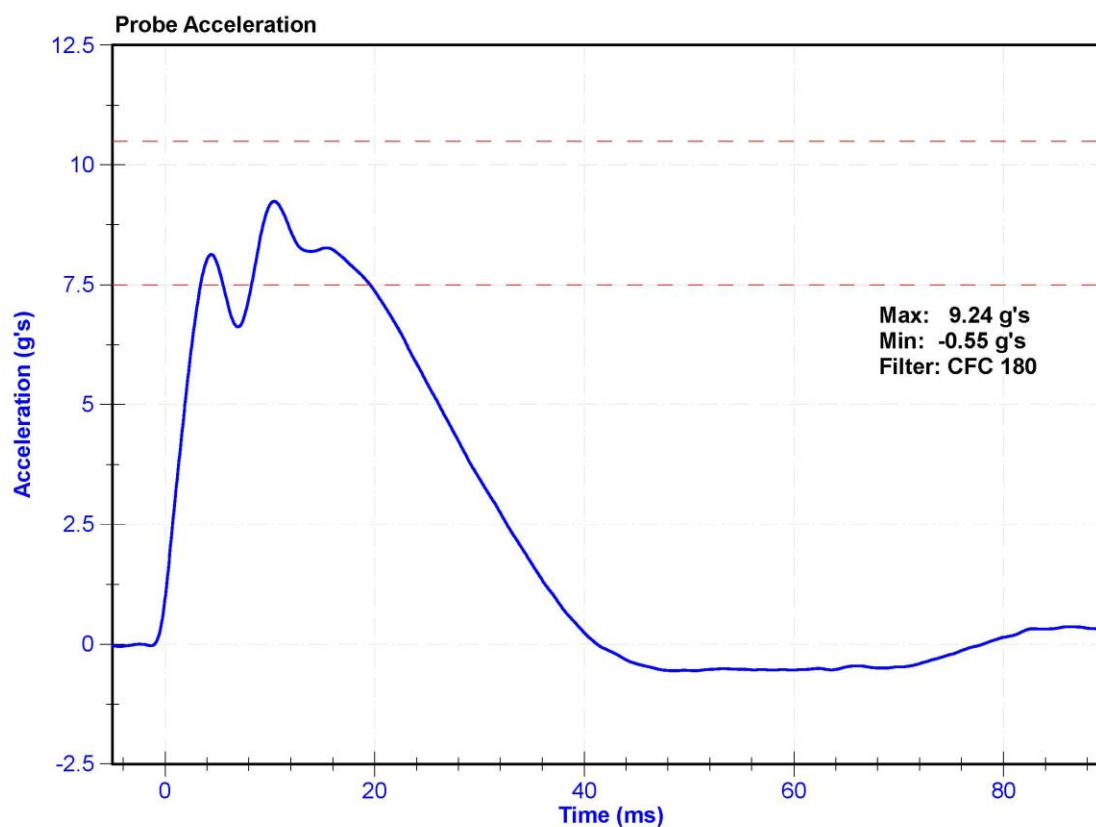




ATD Manufacturer	FTSS	Test Technician	M. Dudek
ATD Serial Number	F034	Laboratory Supervisor	K.Brogan




#### Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21.6	Pass
Humidity	10	70	%	28	Pass
Velocity	3.3	3.5	m/s	3.32	Pass
Lateral Neck Rotation	49	59	deg	52.8	Pass
Time at Maximum Rotation	54	66	ms	58.1	Pass
Time of Rotation Decay from Maximum	53	88	ms	57.9	Pass

#### Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	ENDEVCO 7231CT	AC-AH5M9	1/29/2019	1/29/2020
Front Pendulum Potentiometer	SP22G	DS-094	10/31/2019	10/30/2020
Headform Potentiometer	SP22G	DS-095	10/31/2019	10/30/2020

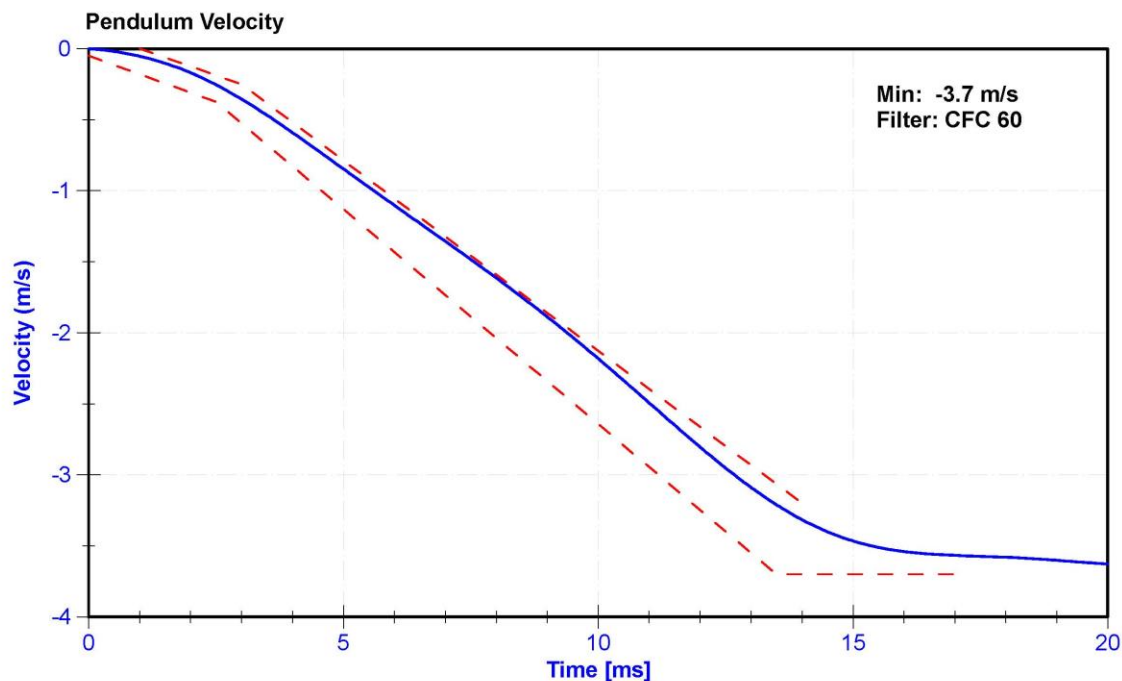

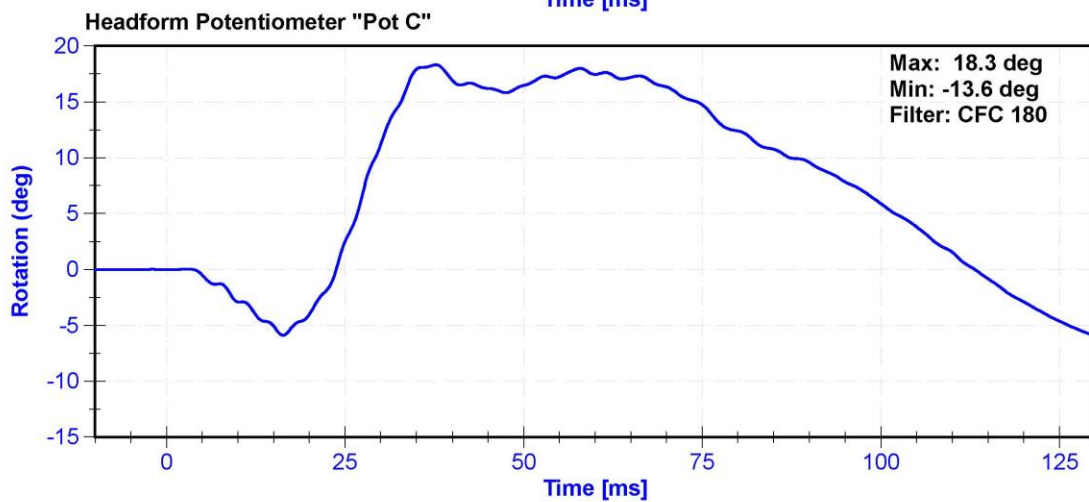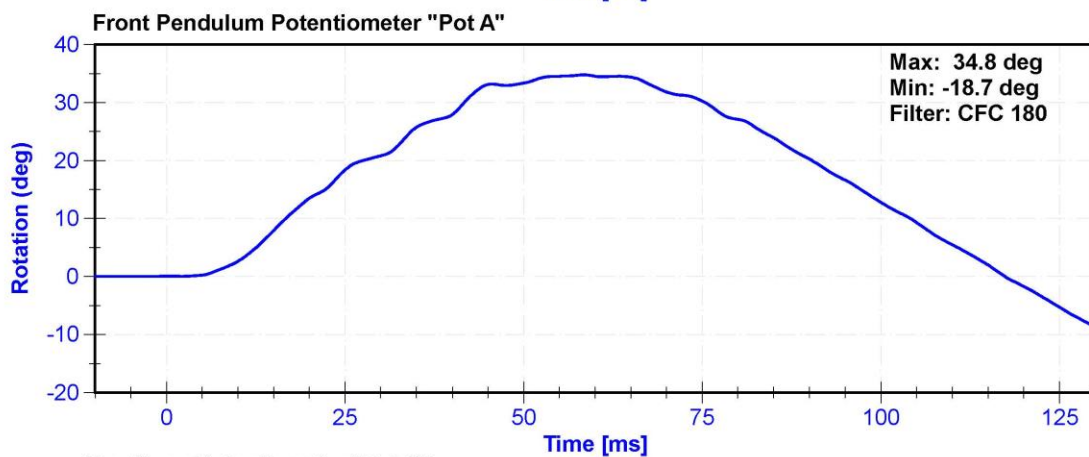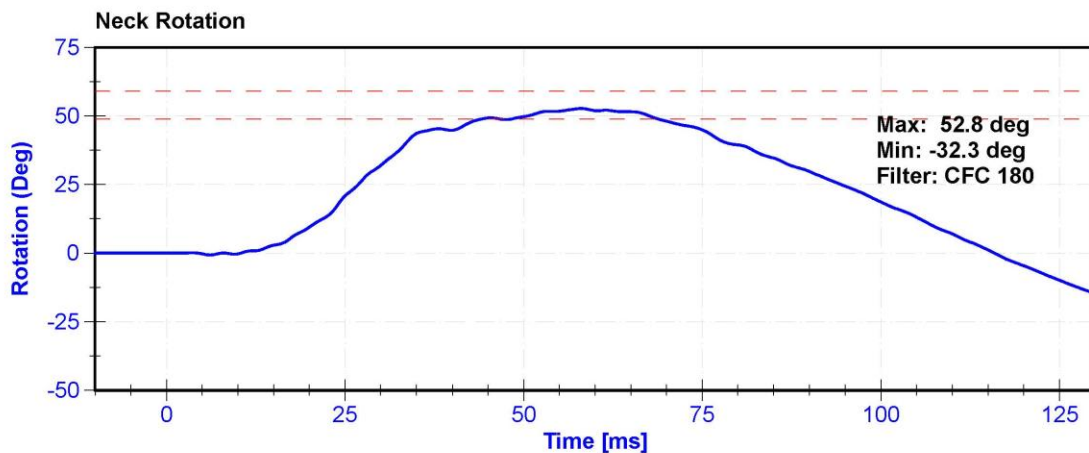


ATD Manufacturer	FTSS	Test Technician	E. Helenbrook
ATD Serial Number	F034	Laboratory Supervisor	K. Brogan

#### Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21.2	Pass
Humidity	10	70	%	33.8	Pass
Rib Displacement	36	40	mm	37.1	Pass

#### Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Rib Potentiometer	Honeywell	183GFE	10/31/2019	4/31/2020

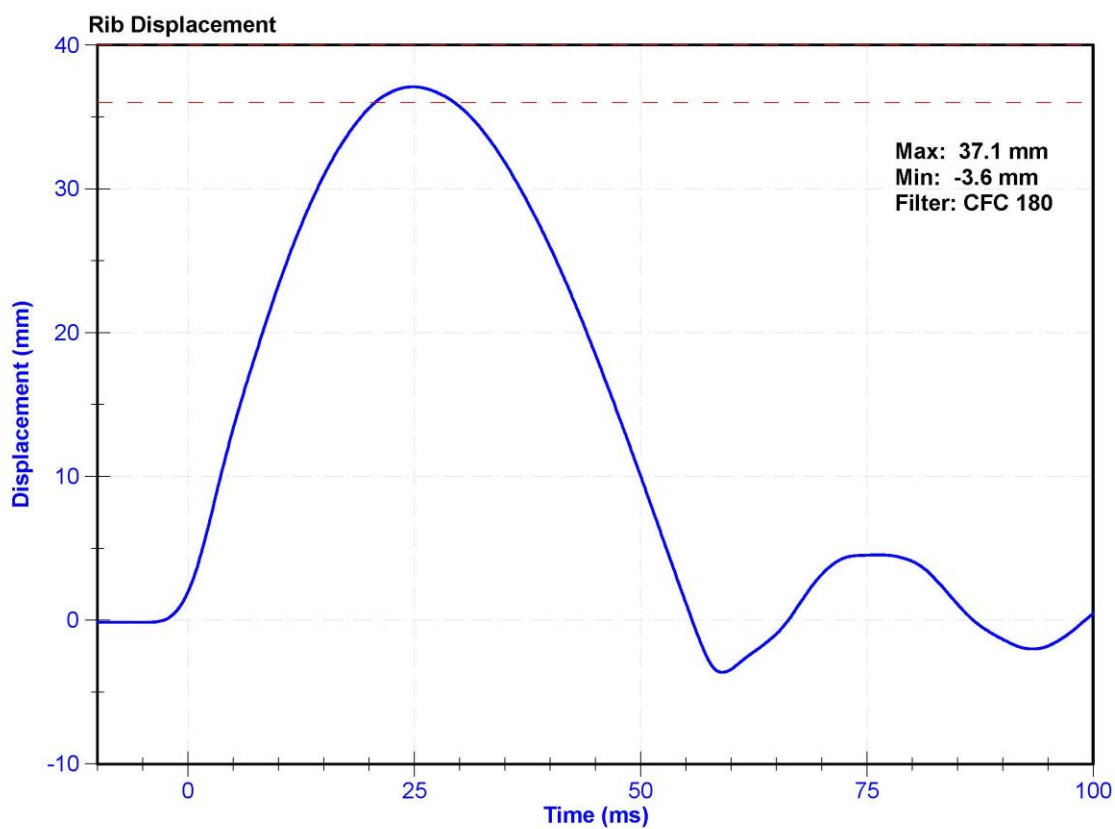


ATD Manufacturer	FTSS	Test Technician	E. Helenbrook
ATD Serial Number	F034	Laboratory Supervisor	K. Brogan

#### Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21.2	Pass
Humidity	10	70	%	33.8	Pass
Rib Displacement	46	51	mm	47.9	Pass

#### Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Rib Potentiometer	Honeywell	183GFE	10/31/2019	4/31/2020

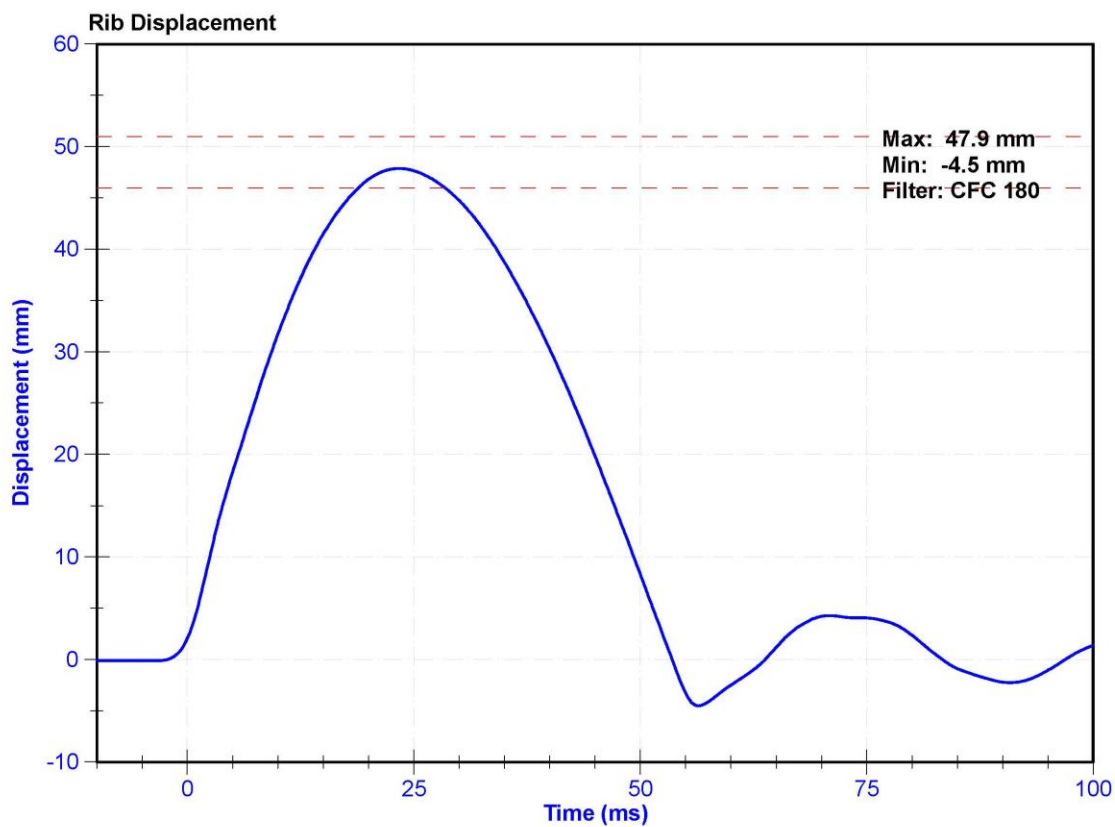




ATD Manufacturer	FTSS	Test Technician	D.Reinhard
ATD Serial Number	F034	Laboratory Supervisor	K. Brogan

#### Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21.5	Pass
Humidity	10	70	%	27.0	Pass
Rib Displacement	36	40	mm	38.0	Pass

#### Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Rib Potentiometer	Honeywell MLT-38000203	DS-184GFE	10/31/2019	4/30/2020

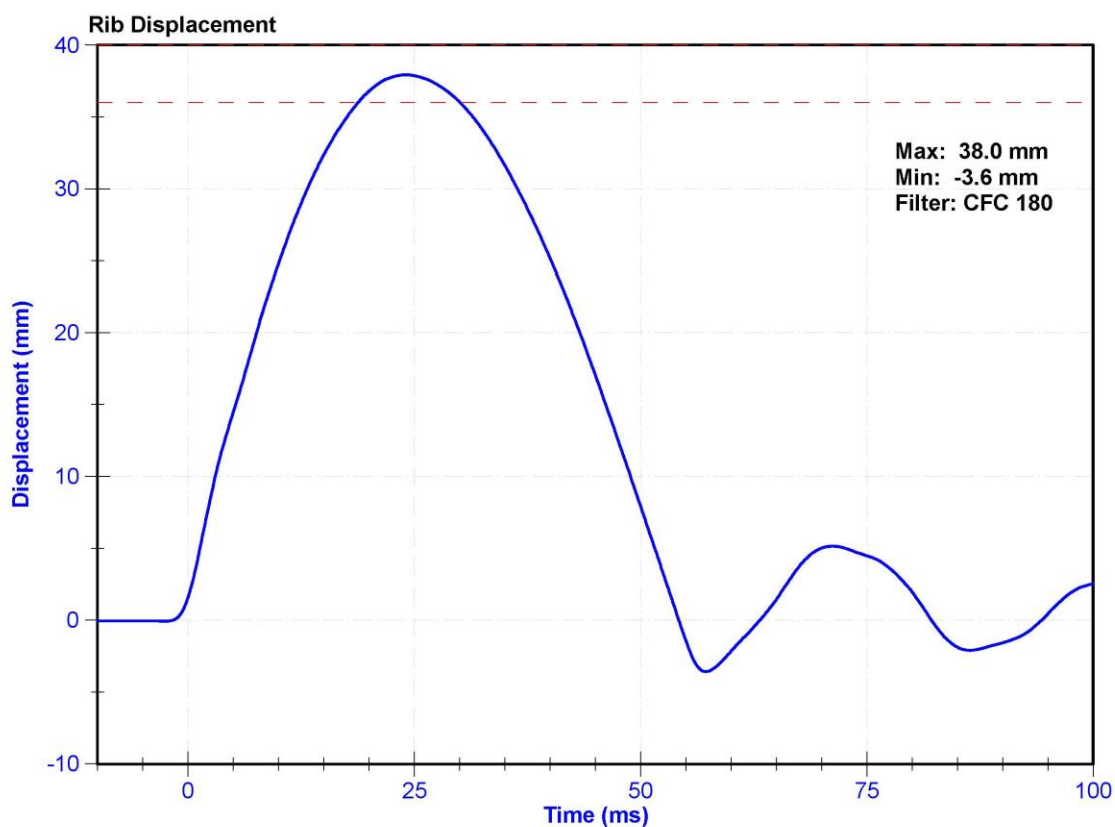


ATD Manufacturer	FTSS	Test Technician	D.Reinhard
ATD Serial Number	F034	Laboratory Supervisor	K. Brogan

#### Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21.5	Pass
Humidity	10	70	%	28.0	Pass
Rib Displacement	46	51	mm	48.7	Pass

#### Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Rib Potentiometer	Honeywell MLT-38000203	DS-184GFE	10/31/2019	4/30/2020

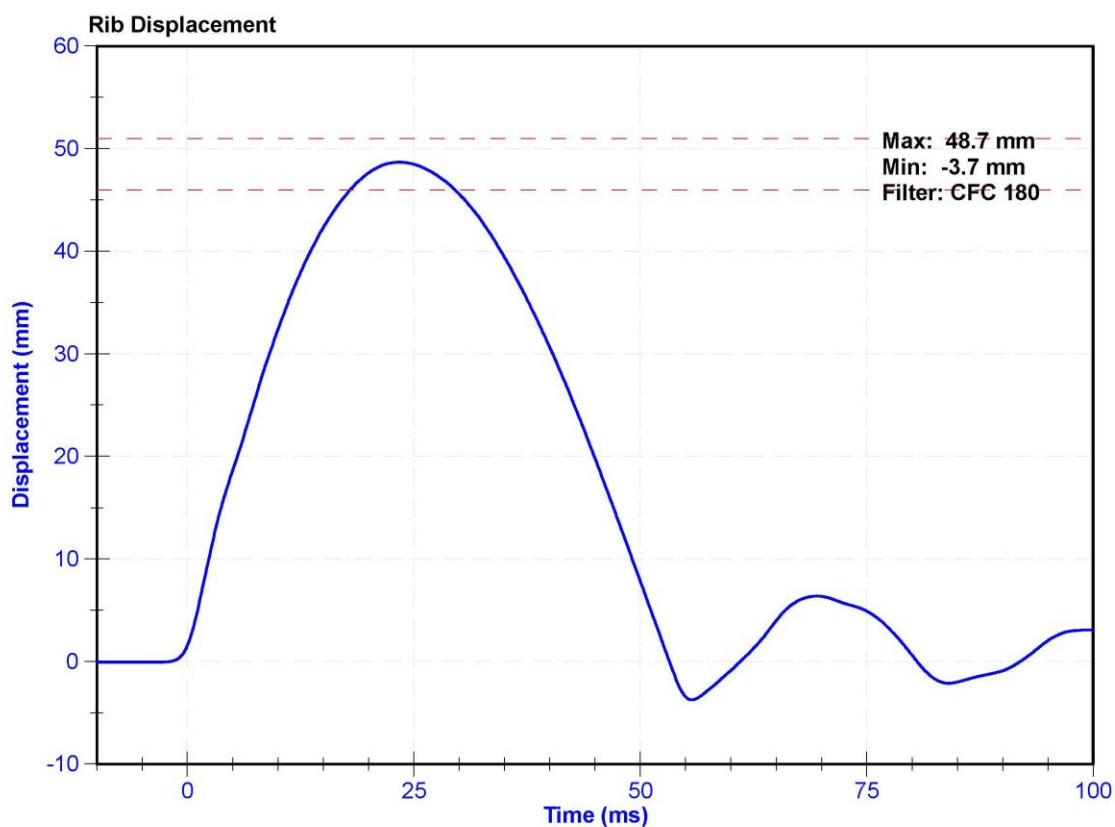


ATD Manufacturer	FTSS	Test Technician	E. Helenbrook
ATD Serial Number	F034	Laboratory Supervisor	K. Brogan

#### Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21.2	Pass
Humidity	10	70	%	33.8	Pass
Rib Displacement	36	40	mm	38.9	Pass

#### Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Rib Potentiometer	Honeywell	182GFE	10/31/2019	4/31/2020

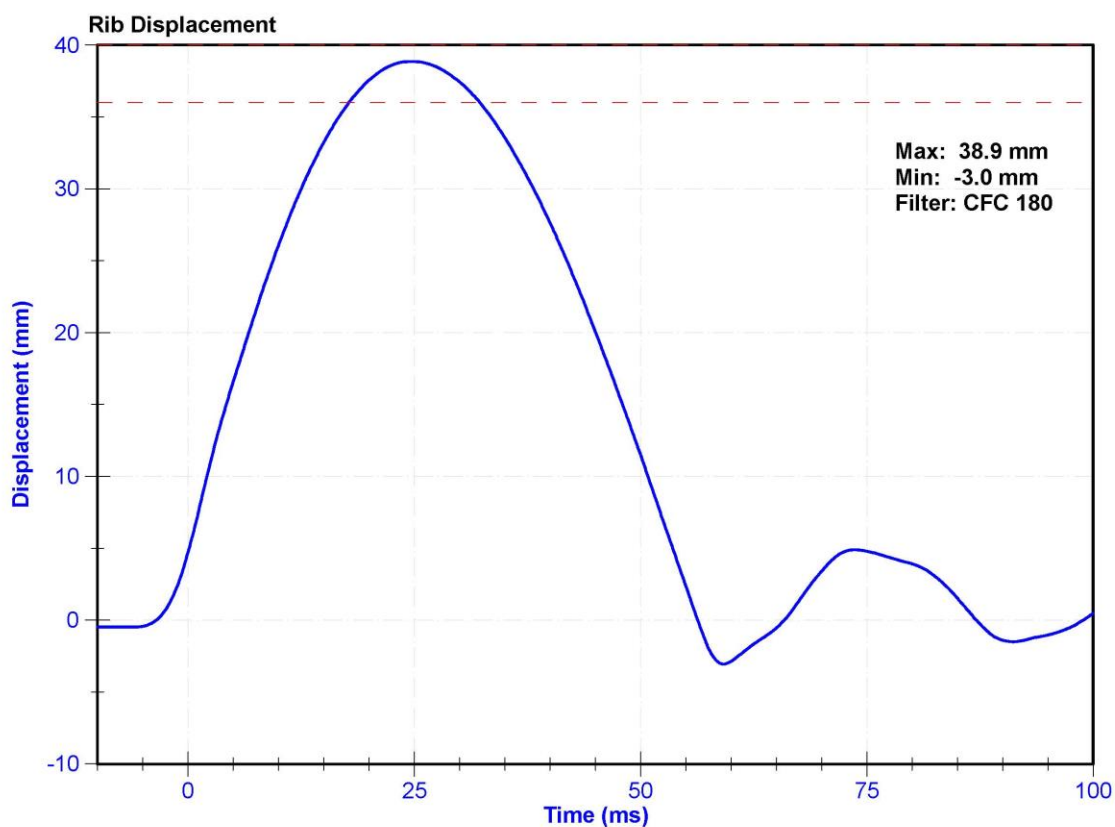


ATD Manufacturer	FTSS	Test Technician	E. Helenbrook
ATD Serial Number	F034	Laboratory Supervisor	K. Brogan

#### Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21.2	Pass
Humidity	10	70	%	33.8	Pass
Rib Displacement	46	51	mm	50.0	Pass

#### Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Rib Potentiometer	Honeywell	182GFE	10/31/2019	4/31/2020

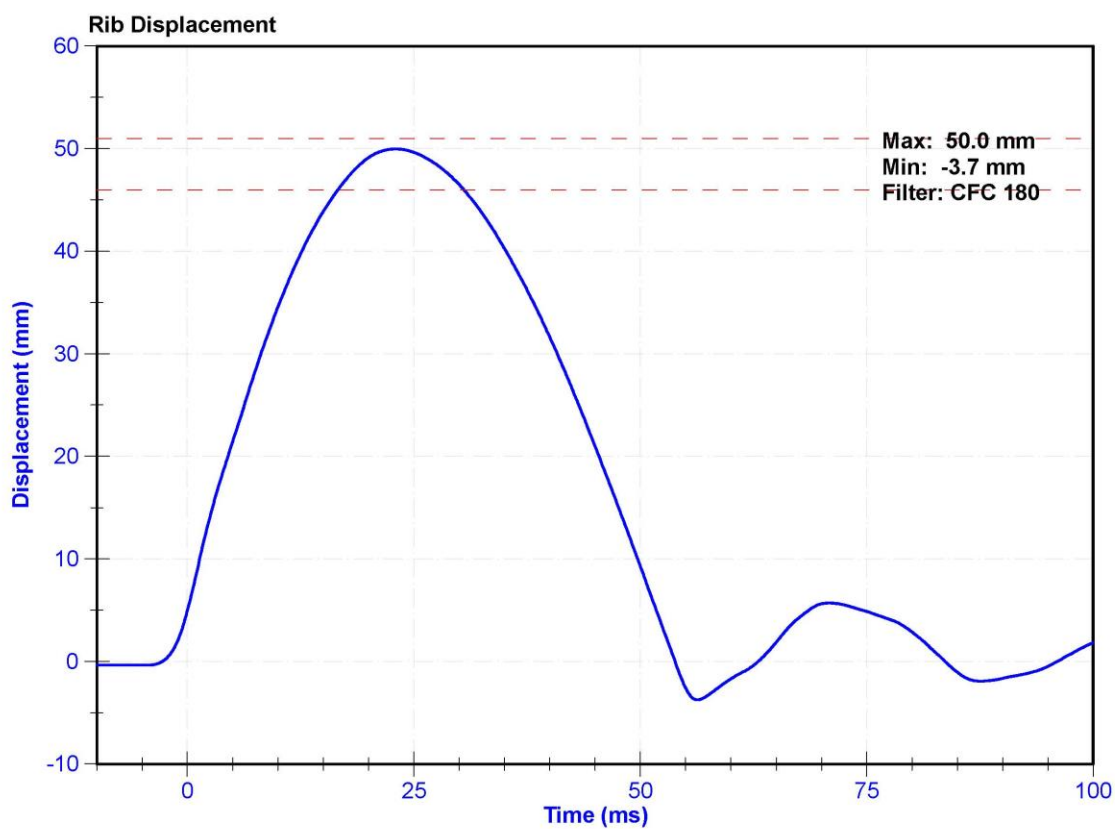




ATD Manufacturer	FTSS	Test Technician	D.Reinhard
ATD Serial Number	F034	Laboratory Supervisor	K. Brogan





### Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21.8	Pass
Humidity	10	70	%	28.0	Pass
Velocity	5.4	5.6	m/s	5.46	Pass
Resistive Force after 6ms	5100	6200	N	5655.4	Pass
Upper Thorax Rib Deflection	34	41	mm	37.7	Pass
Mid Thorax Rib Deflection	37	45	mm	41.6	Pass
Lower Thorax Rib Deflection	37	44	mm	41.1	Pass

### Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Probe Accelerometer	MSI 64C-2000	A260487	8/22/2019	2/20/2020
Upper Thorax Rib Potentiometer	Honeywell MLT-38000203	DS-183GFE	10/31/2019	4/30/2020
Middle Thorax Rib Potentiometer	Honeywell MLT-38000203	DS-184GFE	10/31/2019	4/30/2020
Lower Thorax Rib Potentiometer	Honeywell MLT-38000203	DS-182GFE	10/31/2019	4/30/2020

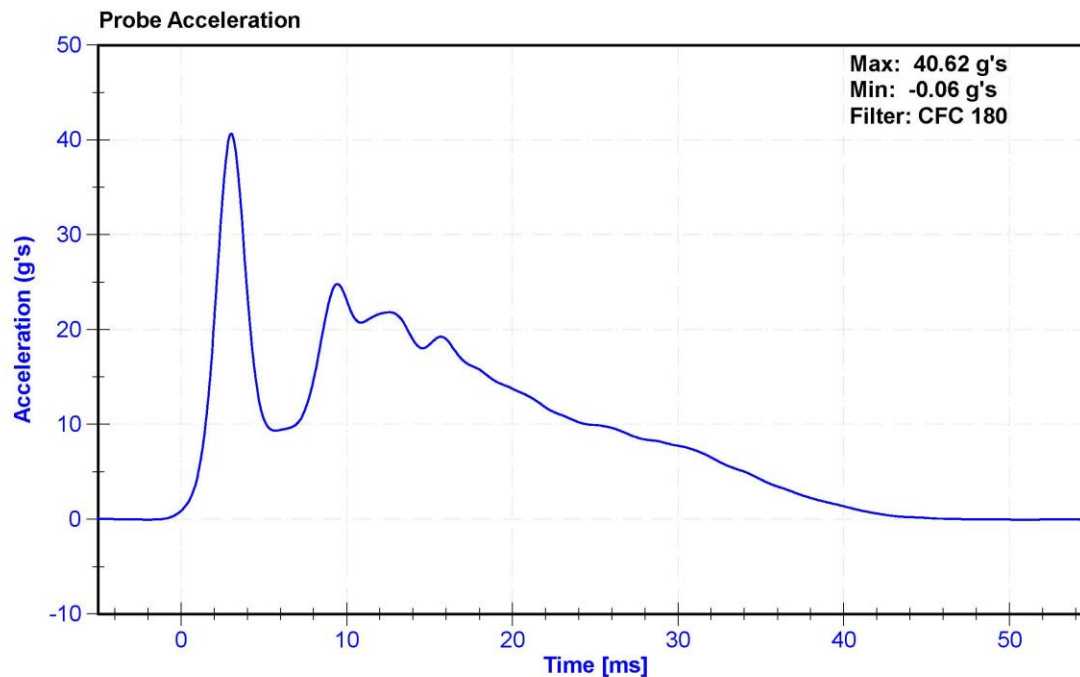

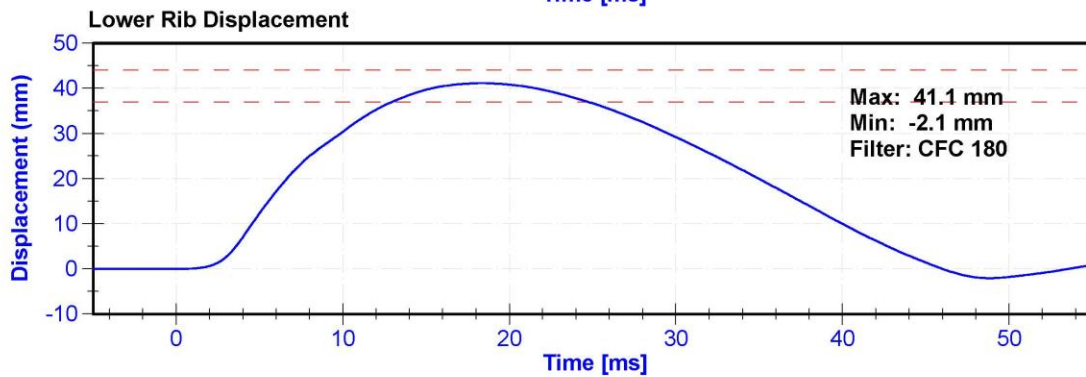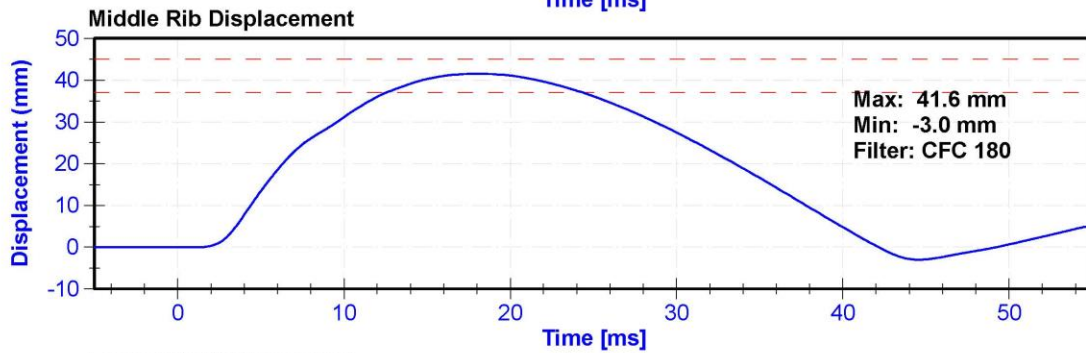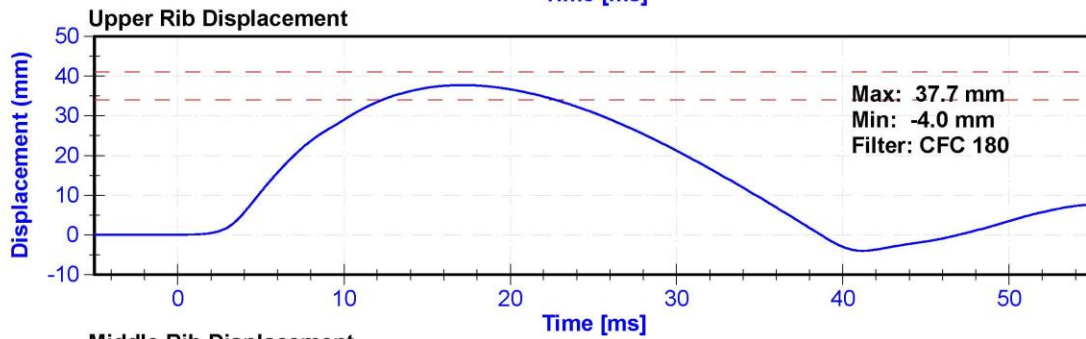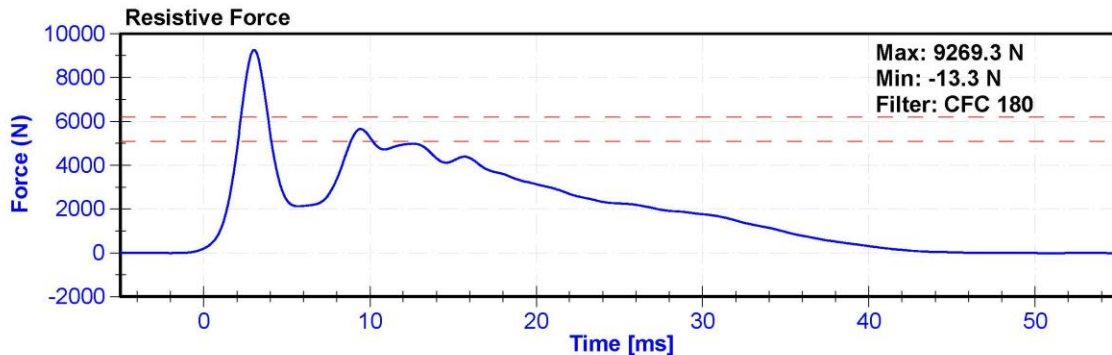


ATD Manufacturer	FTSS	Test Technician	D.Reinhard
ATD Serial Number	F034	Laboratory Supervisor	K.Brogan


#### Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21.2	Pass
Humidity	10	70	%	28	Pass
Velocity	3.9	4.1	m/s	4.09	Pass
Combined Abdomen Force	2200	2700	N	2433.2	Pass
Time at Peak Abdomen Force	10.0	12.3	ms	10.80	Pass
Resistive Probe Force	4000	4800	N	4664.3	Pass
Time at Peak Resistive Force	10.6	13.0	ms	10.75	Pass

#### Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	MSI 64C-2000	A260487	8/22/2019	2/20/2020
Front Abdomen Load Cell	DENTON 2631	LC-1440	6/14/2019	6/13/2020
Middle Abdomen Load Cell	DENTON 2631	LC-1525	6/5/2019	6/4/2020
Rear Abdomen Load Cell	DENTON 2631	LC-1528	6/14/2019	6/13/2020

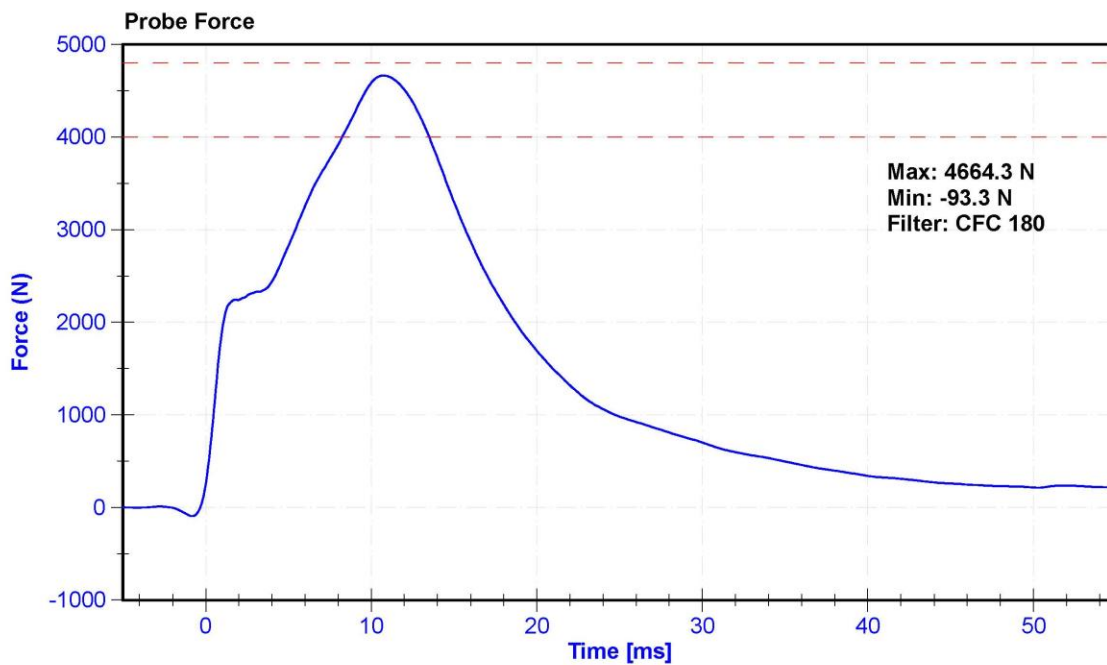

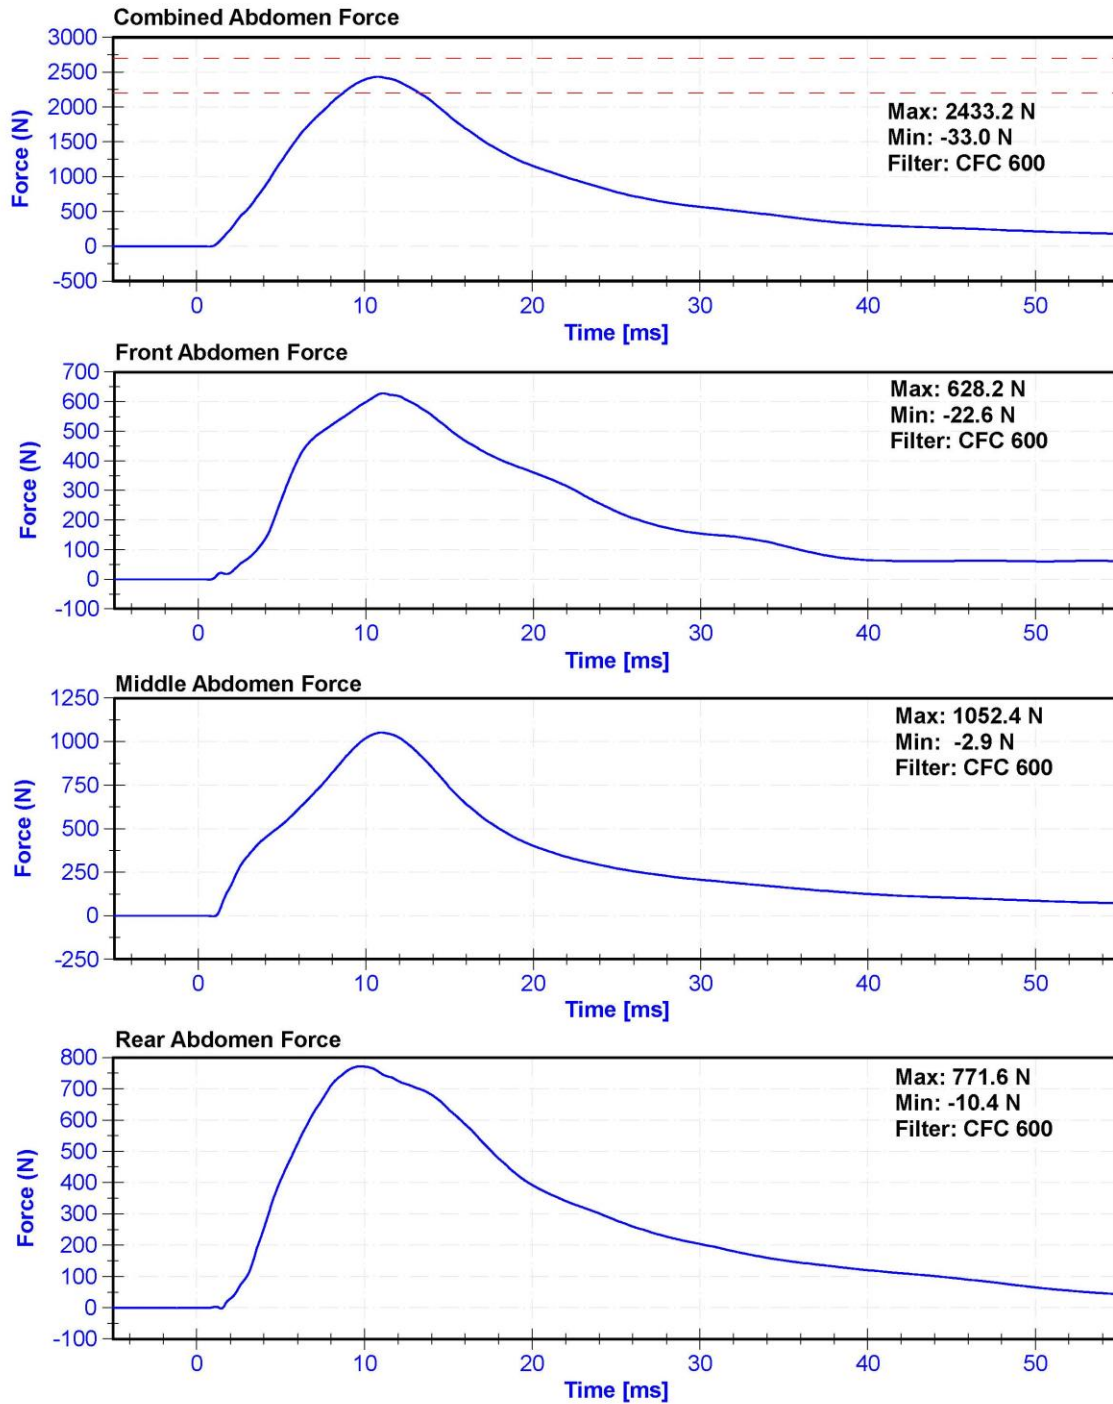







ATD Manufacturer	FTSS	Test Technician	M. Dudek
ATD Serial Number	F034	Laboratory Supervisor	K. Brogan



#### Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21.4	Pass
Humidity	10	70	%	28.0	Pass
Velocity	5.95	6.15	m/s	5.964	Pass
Lateral Spine Rotation	45	55	deg	47.9	Pass
Time at Maximum Rotation	39	53	ms	44.1	Pass
Time of Decay to Zero Degrees	37	57	ms	39.8	Pass
Pulse within Corridor?	-	-	-		

#### Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	ENDEVCO 7231CT	AC-AH5M9 Pend	1/29/2019	1/29/2020
Pendulum "A" Potentiometer	SP22G	DS-094	10/31/2019	10/30/2020
Condyle "B" Potentiometer	SP22G	DS-095	10/31/2019	10/30/2020

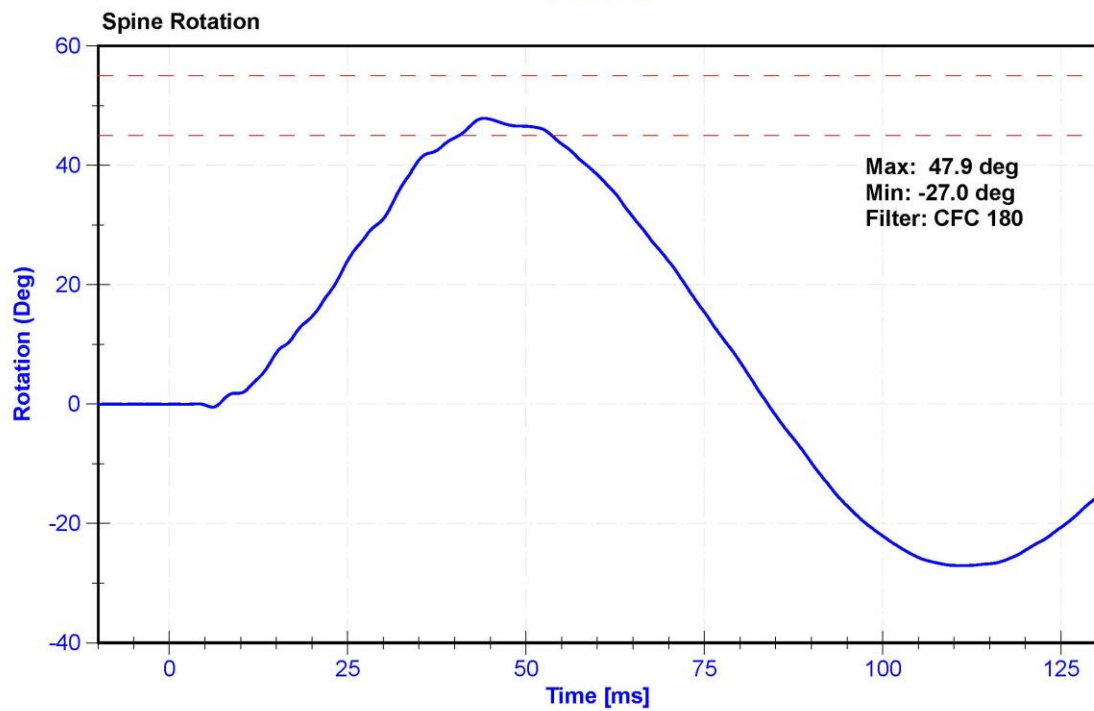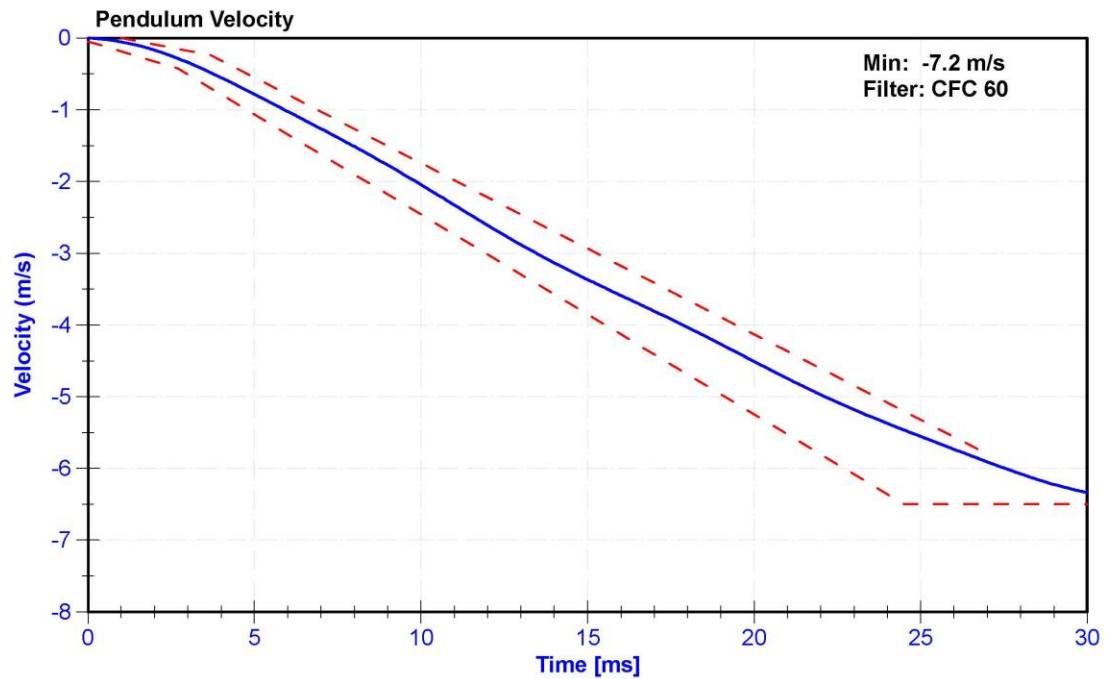

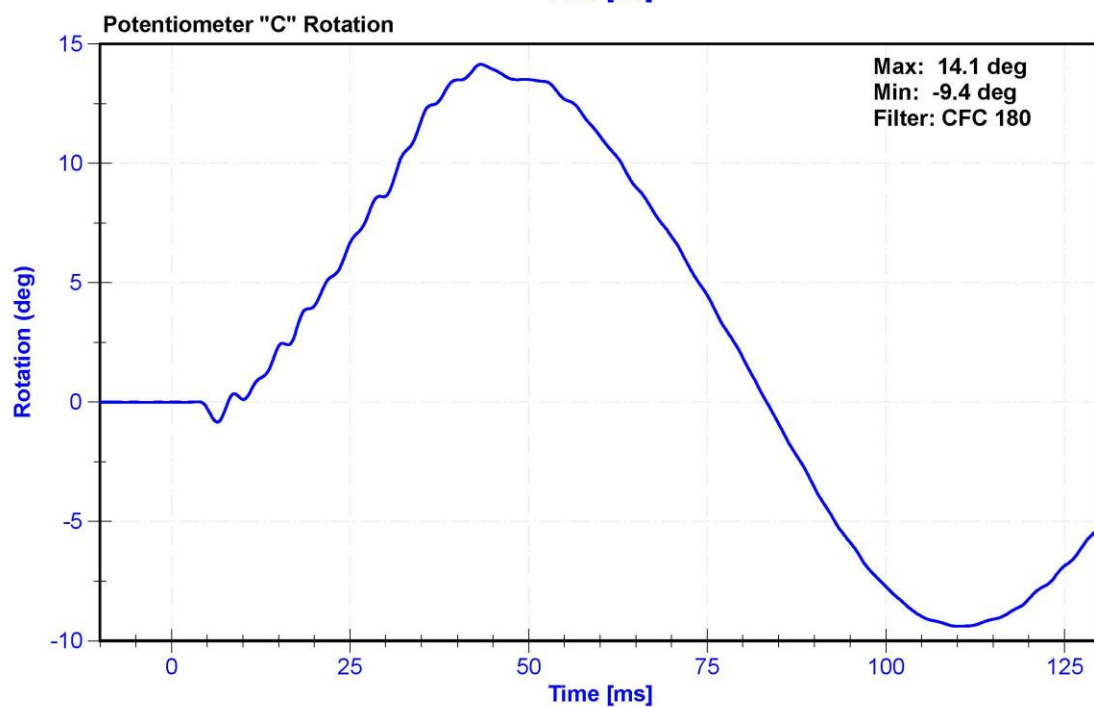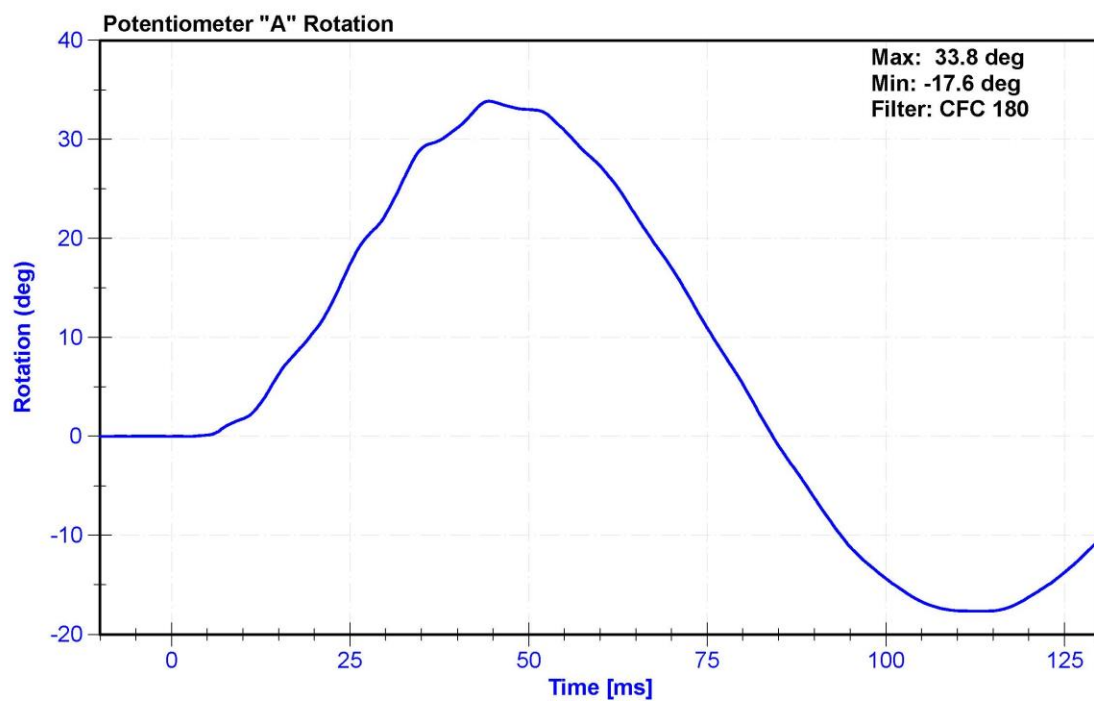


ATD Manufacturer	FTSS	Test Technician	D.Reinhard
ATD Serial Number	F034	Laboratory Supervisor	K. Brogan

#### Results



Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21.3	Pass
Humidity	10	70	%	28.0	Pass
Velocity	4.2	4.4	m/s	4.39	Pass
Resistive Force	4700	5400	N	5042.8	Pass
Time at Peak Resistive Force	11.8	16.1	ms	13.00	Pass
Pubic Force	-1590	-1230	N	-1457.3	Pass
Time at Peak Pubic Force	12.2	17.0	ms	13.90	Pass

#### Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	MSI 64C-2000	A260487	8/22/2019	2/20/2020
Pubic Load Cell	Denton 3096JFL	LC-464fy	6/14/2019	6/13/2020

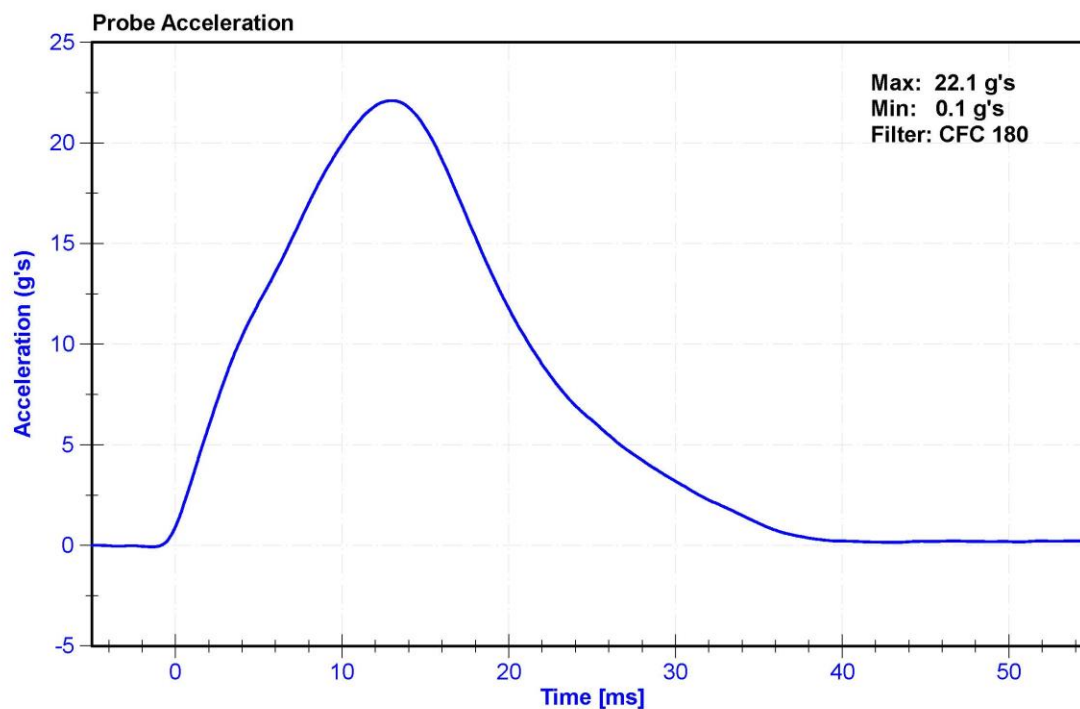



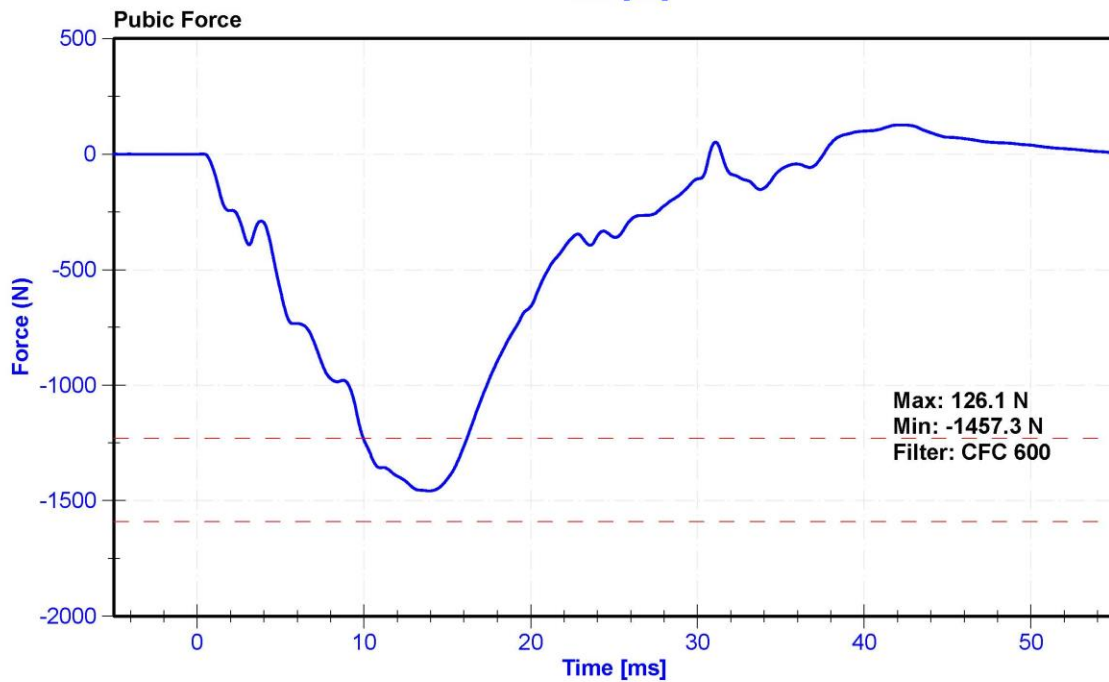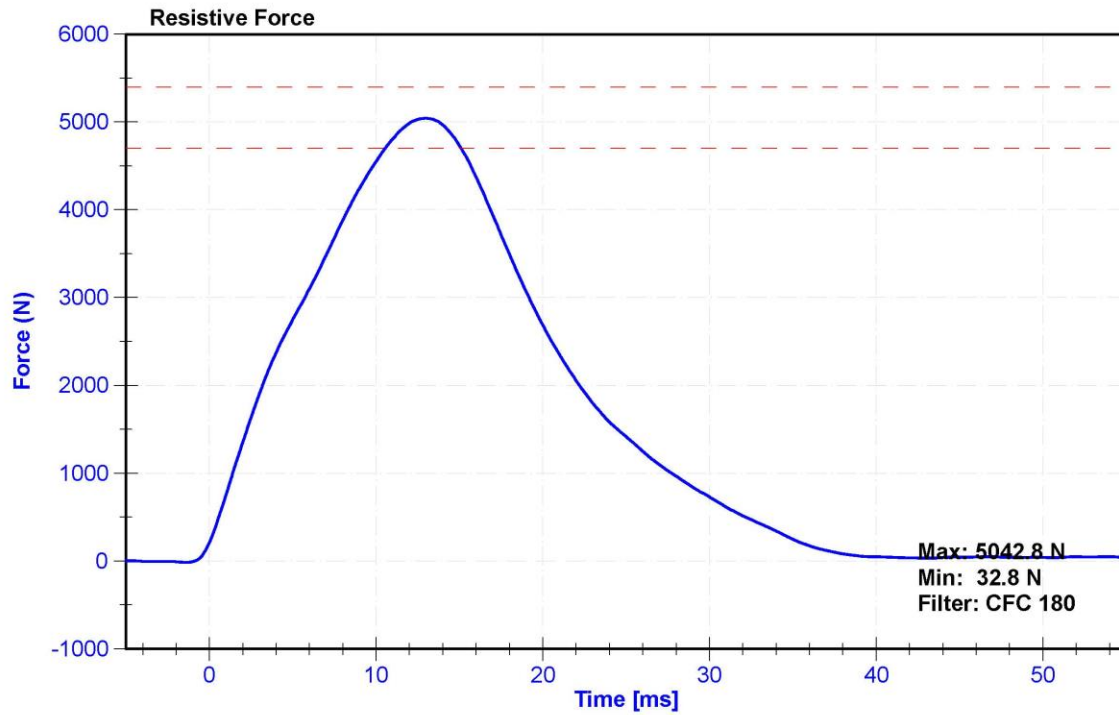

## **CALIBRATION TEST RESULTS**

### **POST-TEST**

**SID-IIS 5<sup>TH</sup> PERCENTILE FEMALE - PASSENGER ATD**

**SERIAL No: 300**





# External Measurements - SID-IIs

Technician: **K. Dutton**

Date: **11/05/2019**

Dummy Serial Number: **300**

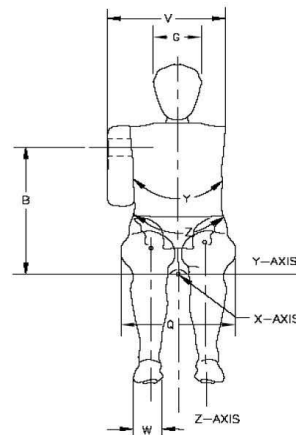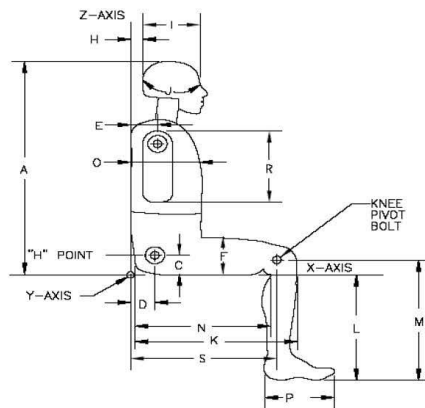

Symbol	Description	Specification (mm)		Result (mm)	Pass/Fail
A	Sitting Height	772	788	779	Pass
B	Shoulder Pivot Height	437	453	450	Pass
C	H-point Height	79	89	85	Pass
D	H-point from seatback	141	151	145	Pass
E	Shoulder Pivot from Backline	97	107	103	Pass
F	Thigh Clearance	119	135	127	Pass
G	Head Breadth	140	148	145	Pass
H	Head Back from Backline	40	46	43	Pass
I	Head Depth	178	188	185	Pass
J	Head Circumference	541	551	546	Pass
K	Buttock to Knee Length	514	540	530	Pass
L	Popliteal Height	343	369	356	Pass
M	Knee Pivot to floor height	392	409	402	Pass
N	Buttock Popliteal Length	416	442	431	Pass
O	Chest Depth w/o jacket	195	211	203	Pass
P	Foot Length	216	232	222	Pass
Q	Hip Breadth (w/pelvic plugs)	313	323	319	Pass
R	Arm Length	249	259	253	Pass
S	Knee Joint to seatback	477	493	485	Pass
V	Shoulder Width	341	357	351	Pass
W	Foot Width	78	94	84	Pass
Y	Chest Circumference w/jacket	851	881	870	Pass
Z	Waist Circumference	761	791	769	Pass


ATD Manufacturer	FTSS	Test Technician	E. Helenbrook
ATD Serial Number	300	Laboratory Supervisor	K. Brogan

#### Results


Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21.8	Pass
Humidity	10	70	%	29.1	Pass
Resultant Acceleration	115	137	g's	133.5	Pass
Oscillation	0	15	%	1.2	Pass
Fore-Aft Acceleration	-15	15	g's	-7.2	Pass

#### Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
X Accelerometer	Endevco	P68057	10/29/2019	4/29/2020
Y Accelerometer	Endevco	P79189	10/29/2019	4/29/2020
Z Accelerometer	Endevco	P52095	10/29/2019	4/29/2020

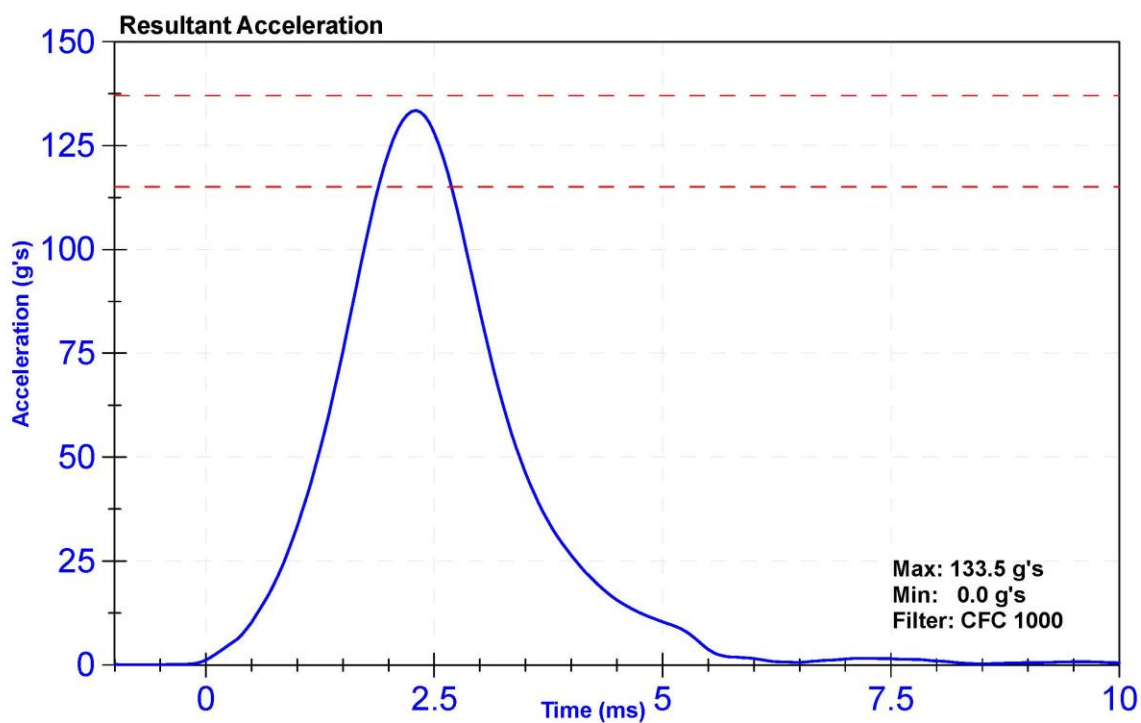



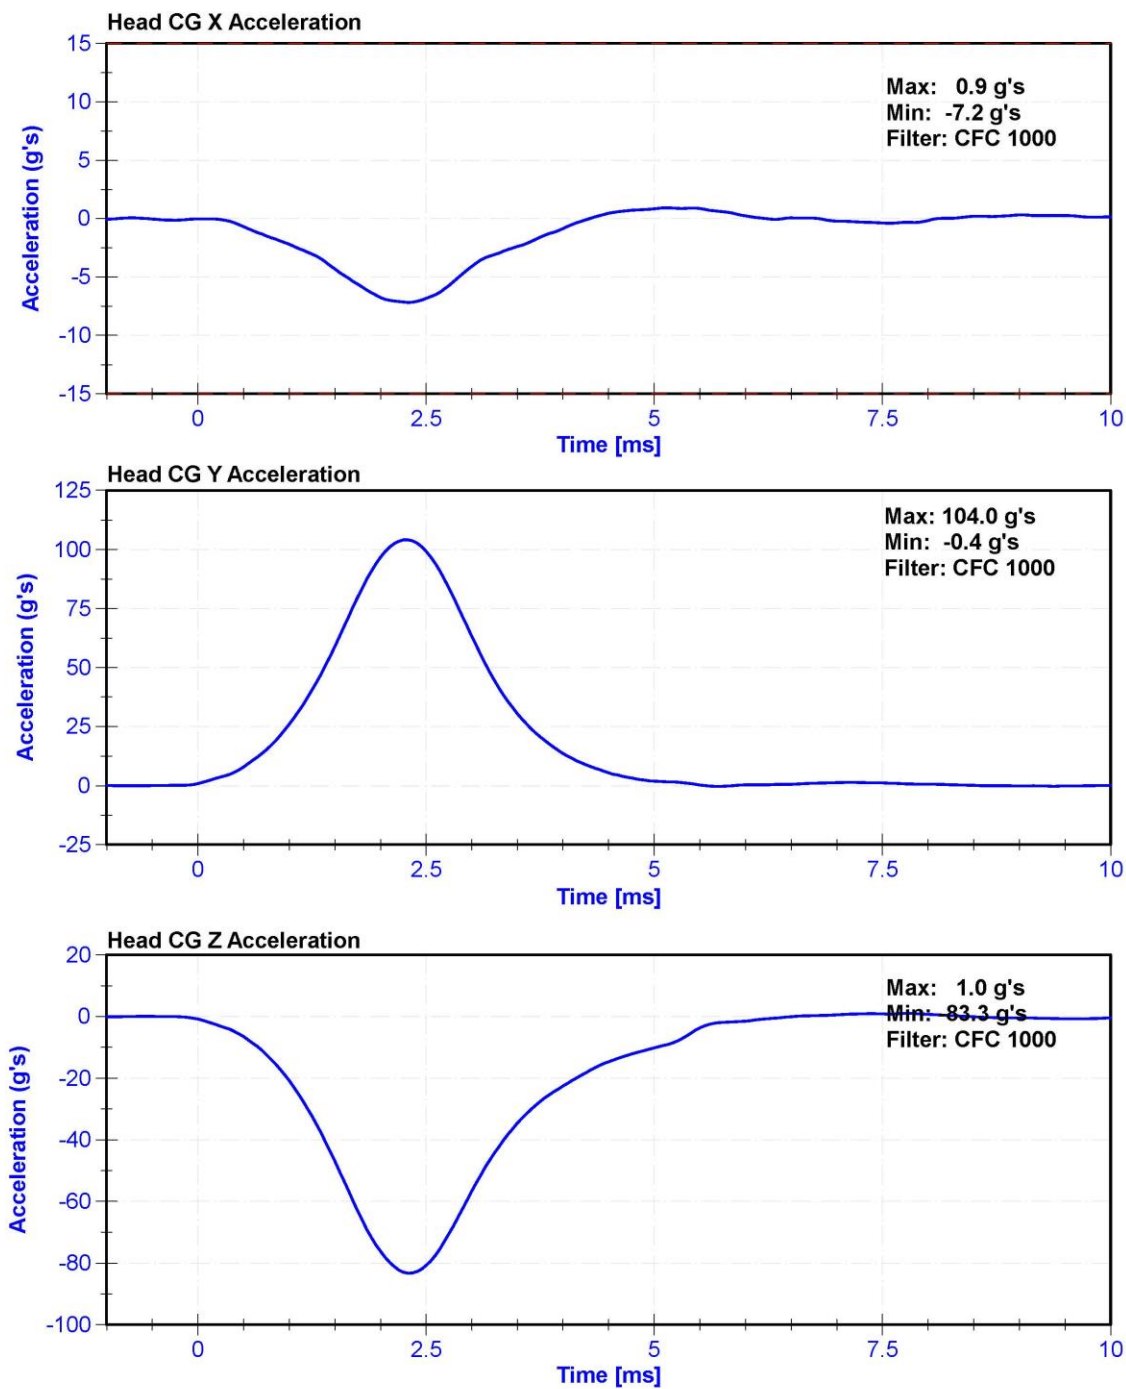


ATD Manufacturer	FTSS	Test Technician	M. Dudek
ATD Serial Number	300	Laboratory Supervisor	K. Brogan



#### Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21.6	Pass
Humidity	10	70	%	36.7	Pass
Velocity	5.51	5.63	m/s	5.549	Pass
Pendulum Impulse at 10ms	2.2	2.8	m/s	2.34	Pass
Pendulum Impulse at 15ms	3.3	4.1	m/s	3.50	Pass
Pendulum Impulse at 20ms	4.4	5.4	m/s	4.70	Pass
Pendulum Impulse at 25ms	5.4	6.1	m/s	5.65	Pass
Pendulum Impulse from 25 to 100ms	5.5	6.2	m/s	5.98	Pass
Neck Rotation	71	81	deg	77.2	Pass
Time at Maximum Rotation	50	70	ms	60.4	Pass
Moment about the OC	36	44	Nm	42.0	Pass
Moment Decay to 0 Nm	102	126	ms	113.9	Pass

#### Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	ENDEVCO 7231CT	AC-AH5M9 Pend	1/29/2019	1/29/2020
Pendulum Potentiometer	Denton 78051-342	DS-184Pend	11/4/2019	11/3/2020
Condyle Potentiometer	Denton 78051-342	DS-185Pend	11/4/2019	11/3/2020
Upper Neck Load Cell	Denton 1716A	LC-2192Fy	6/20/2019	6/19/2020

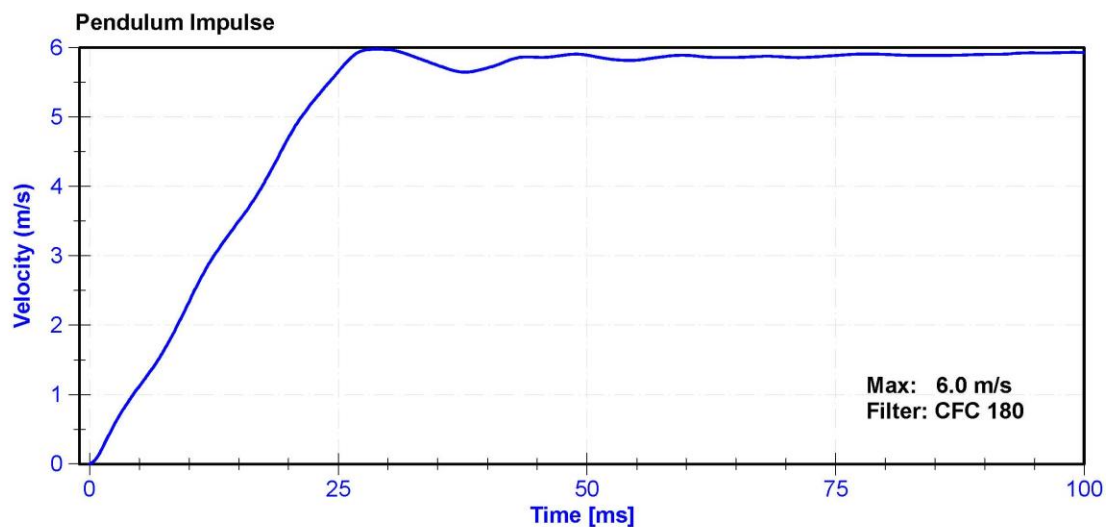

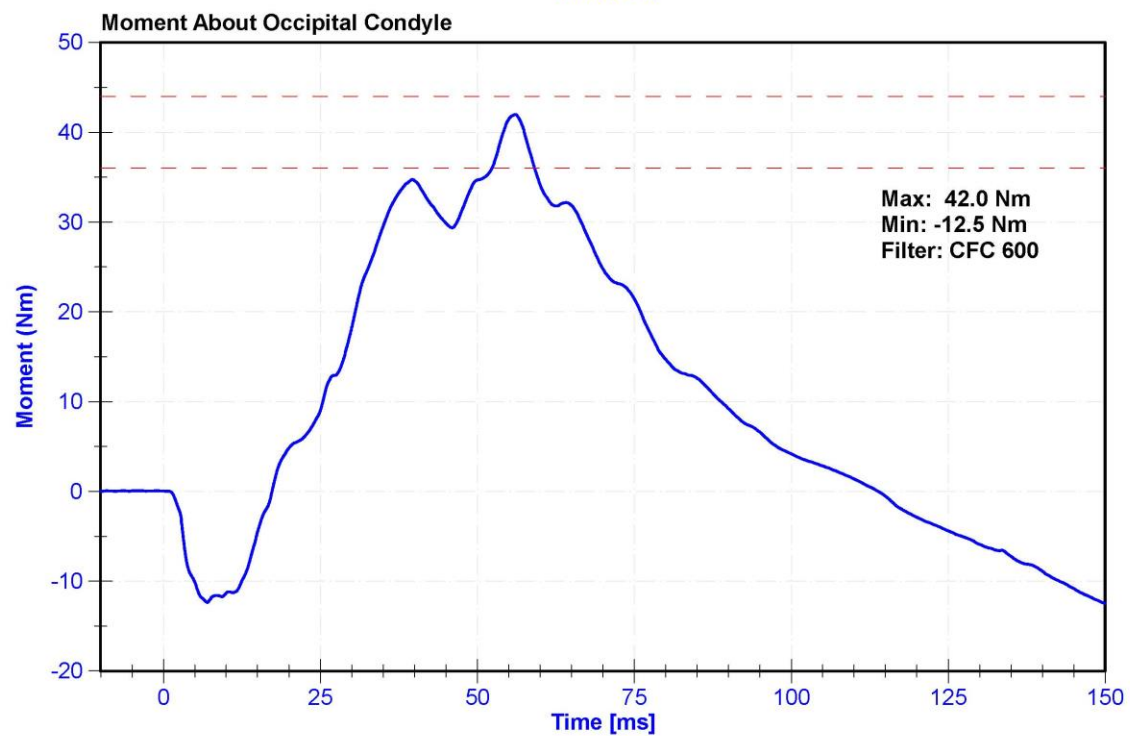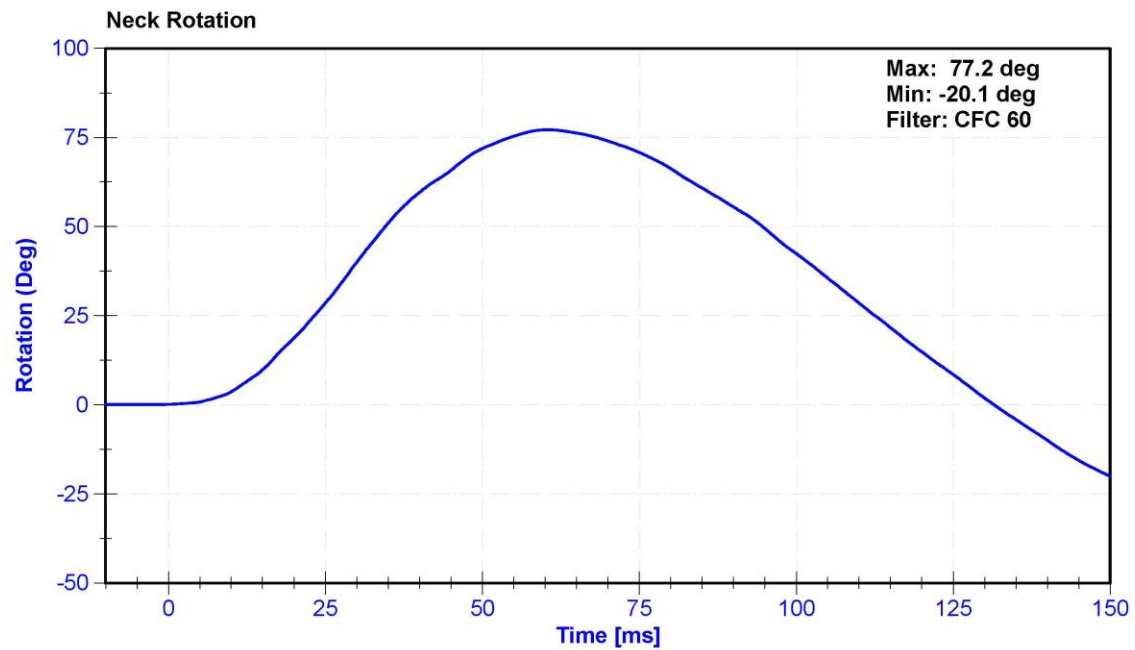


ATD Manufacturer	FTSS	Test Technician	D.Reinhard
ATD Serial Number	300	Laboratory Supervisor	K. Brogan

#### Results



Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21.5	Pass
Humidity	10	70	%	34.9	Pass
Velocity	4.2	4.4	m/s	4.39	Pass
Probe Acceleration	13	18	g's	16.3	Pass
Shoulder Deflection	28	37	mm	29.5	Pass
Lateral Upper Spine Acceleration	17	22	g's	21.7	Pass

#### Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	MSI 64C-2000	A260487	8/22/2019	2/20/2020
Shoulder Potentiometer	Servo 08CT1-3725	DS-053 GFE	10/29/2019	4/28/2020
Upper Spine Y Accelerometer	ENDEVCO 7264CT	AC-P51668	10/29/2019	4/28/2020

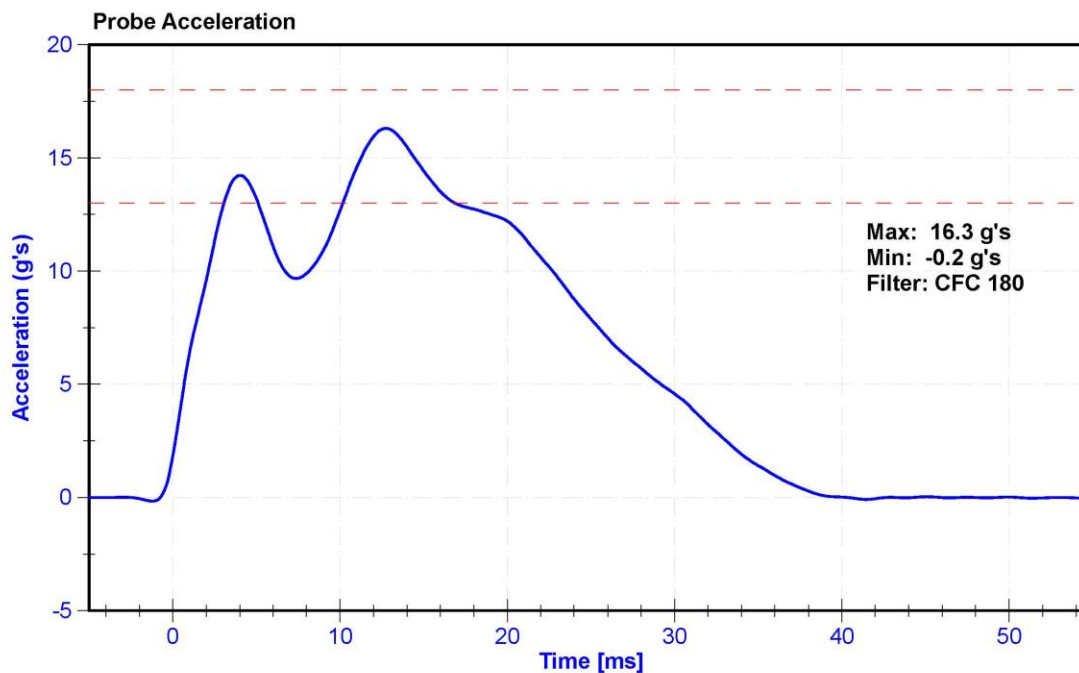



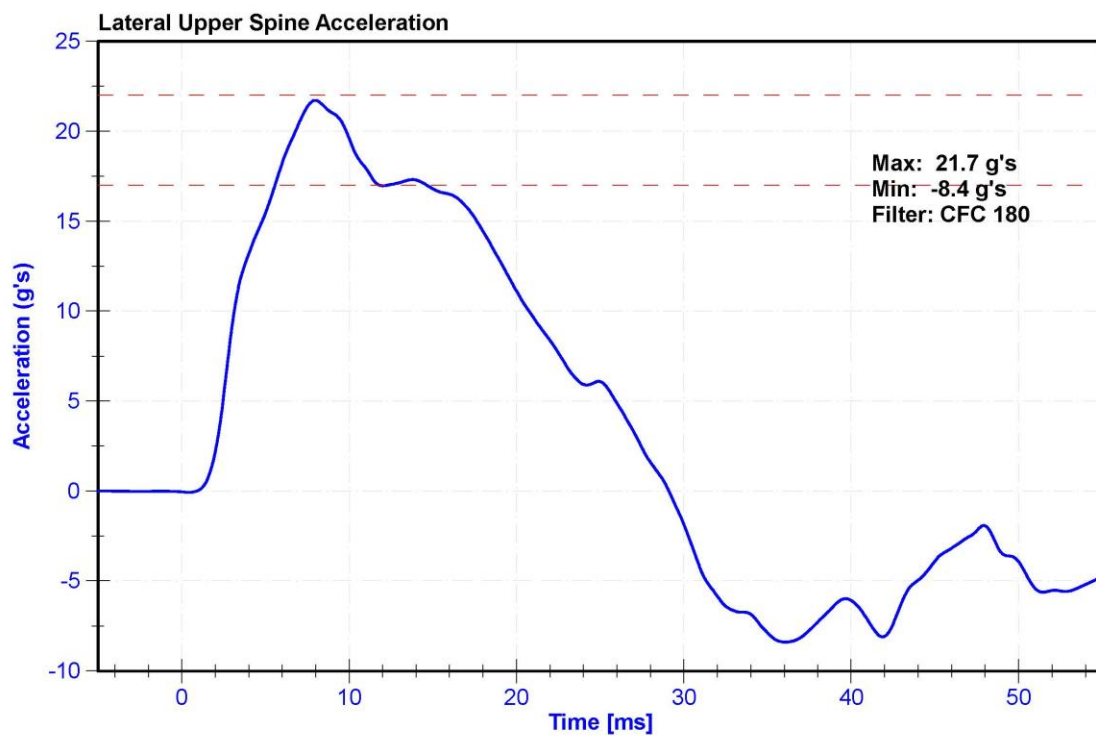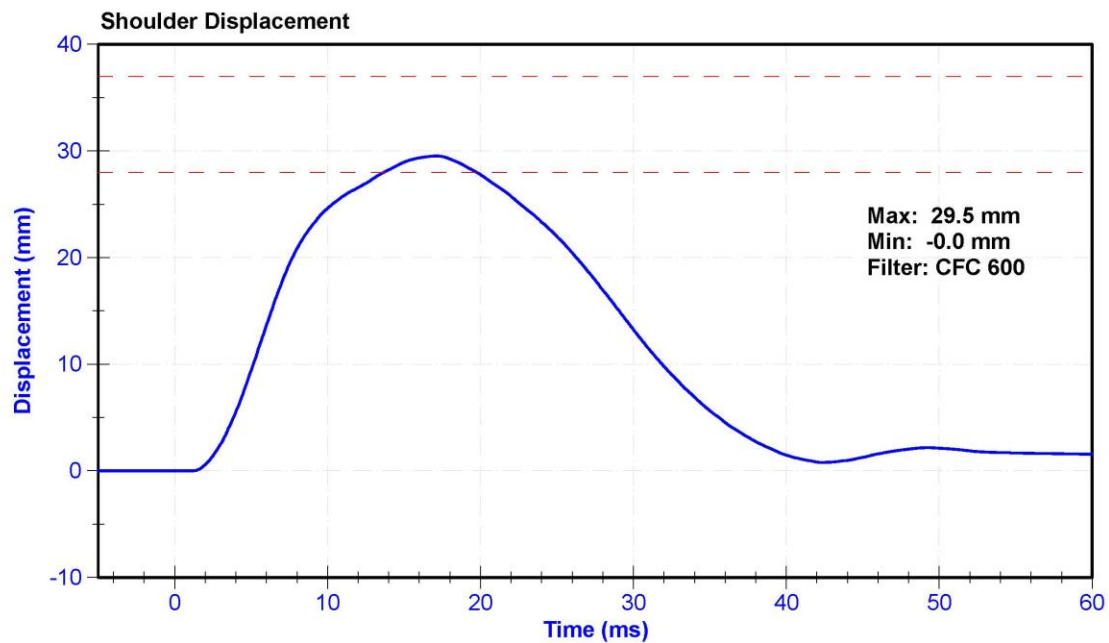


ATD Manufacturer	FTSS	Test Technician	D.Reinhard
ATD Serial Number	300	Laboratory Supervisor	K. Brogan


#### Results



Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21.4	Pass
Humidity	10	70	%	27.9	Pass
Velocity	6.6	6.8	m/s	6.74	Pass
Probe Acceleration after 5 ms	30	36	g's	34.5	Pass
Lateral Upper Spine Acceleration	34	43	g's	38.5	Pass
Lateral Lower Spine Acceleration	29	37	g's	33.9	Pass
Shoulder Deflection	31	40	mm	33.7	Pass
Upper Thorax Rib Deflection	25	32	mm	25.6	Pass
Mid Thorax Rib Deflection	30	36	mm	31.0	Pass
Lower Thorax Rib Deflection	32	38	mm	33.9	Pass

#### Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	MSI 64C-2000	A260487	8/22/2019	2/20/2020
Upper Spine T1 Y Accelerometer	ENDEVCO 7264CT	AC-P51668	10/29/2019	4/28/2020
Upper Spine T12 Y Accelerometer	ENDEVCO 7264	AC-P64147	10/29/2019	4/28/2020
Shoulder Potentiometer	Servo 08CT1-3725	DS-053 GFE	10/29/2019	4/28/2020
Upper Thorax Rib Potentiometer	Servo 08CT1-3725	DS-451GFE	10/29/2019	4/28/2020
Middle Thorax Rib Potentiometer	Servo 08TC1-3745	DS-040GFE	10/29/2019	4/28/2020
Lower Thorax Rib Potentiometer	Servo 08TC1-3725	DS-1156GFE	10/29/2019	4/28/2020

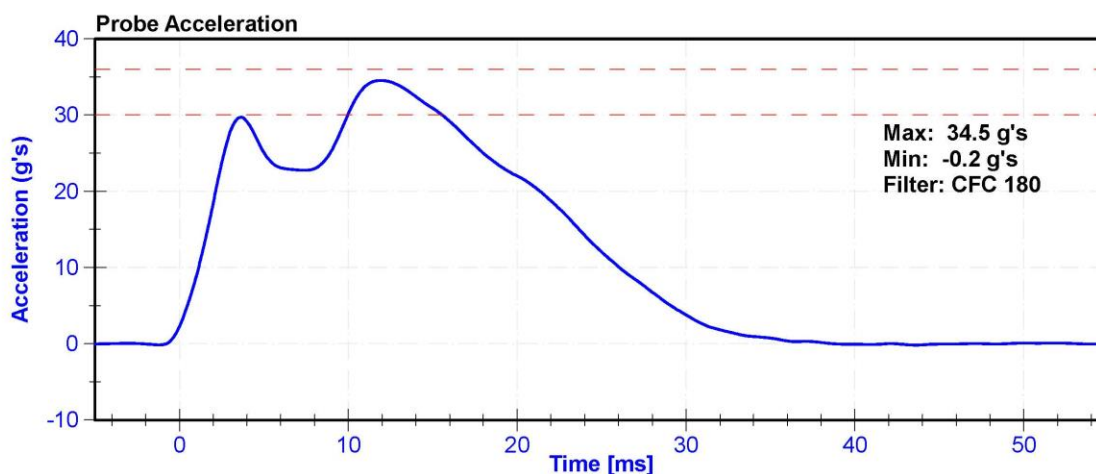

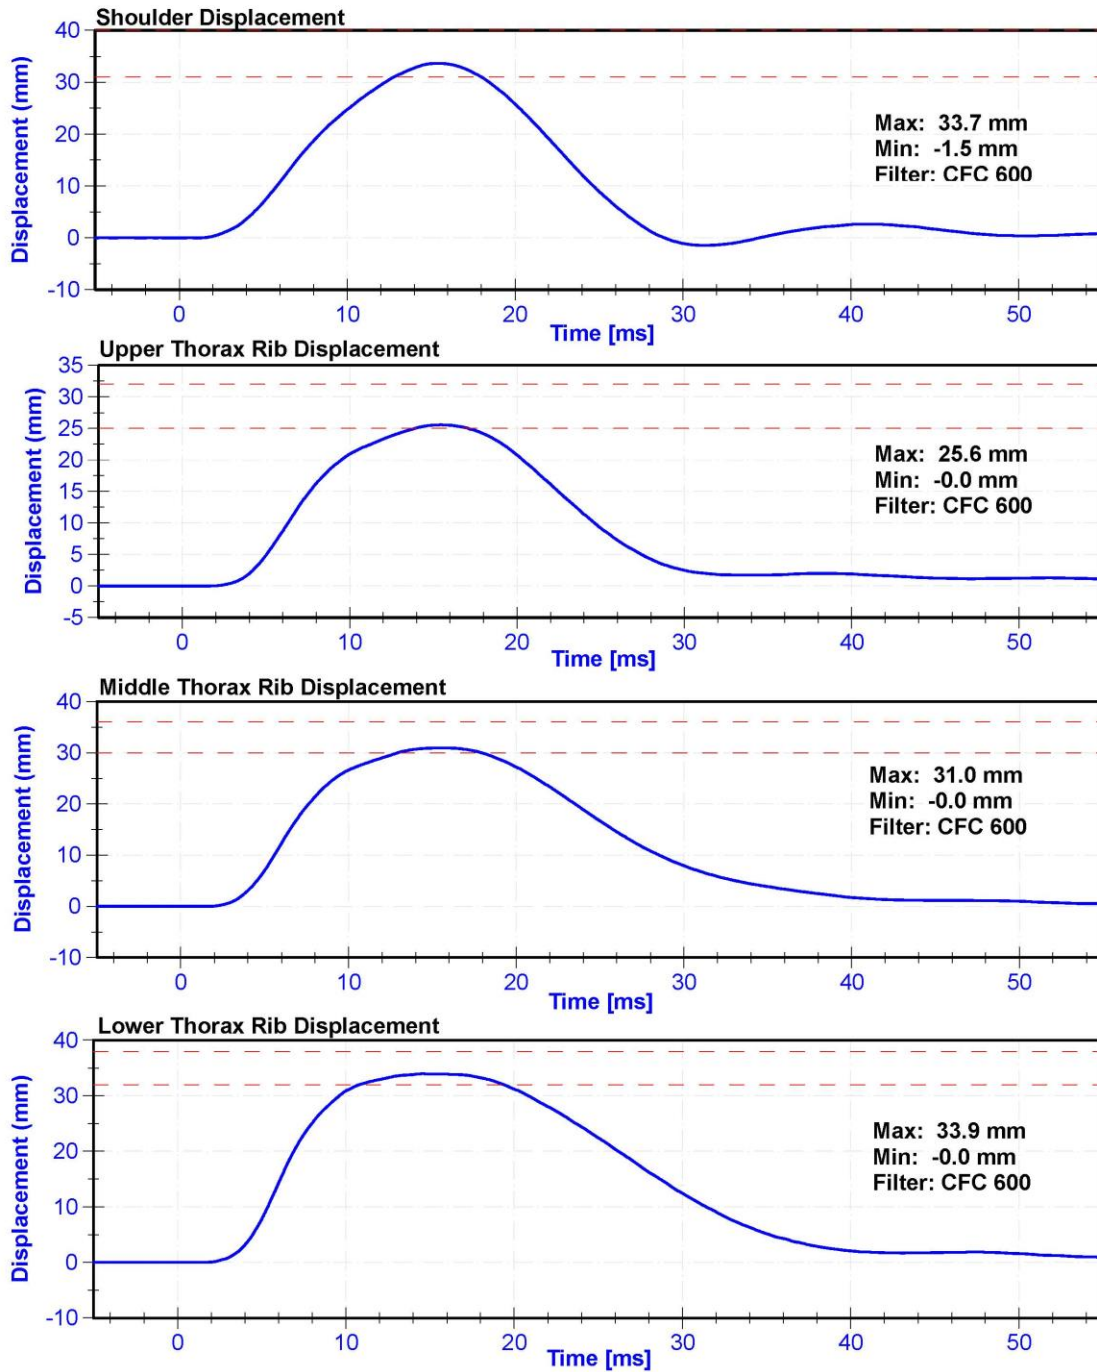

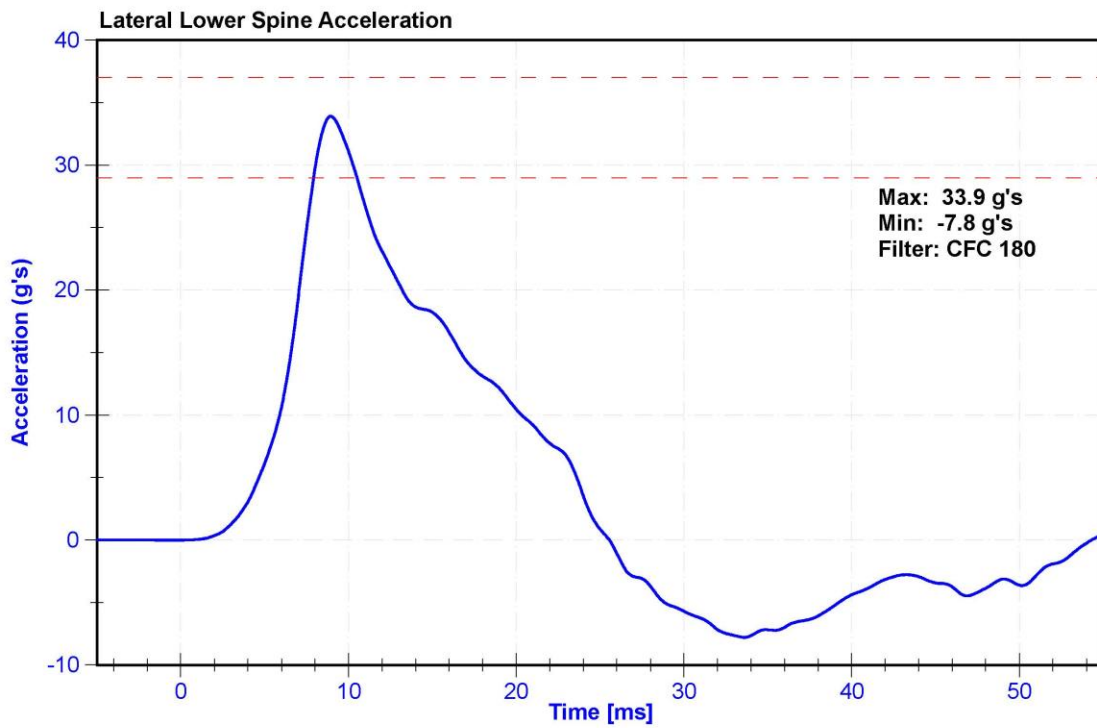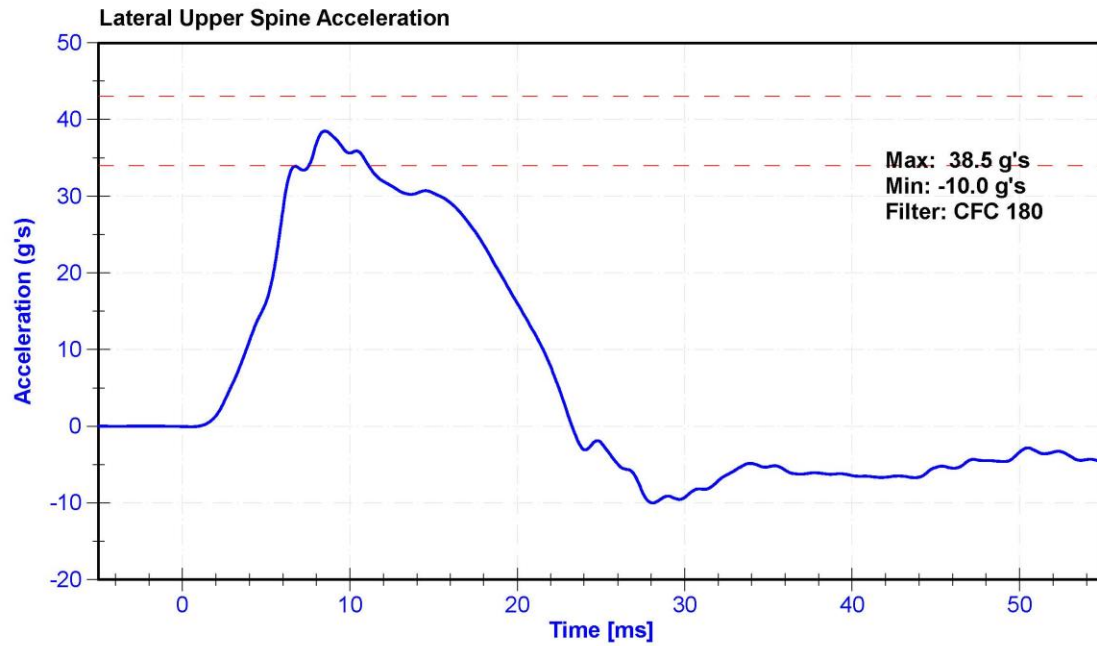




ATD Manufacturer	FTSS	Test Technician	D.Reinhard
ATD Serial Number	300	Laboratory Supervisor	K. Brogan




#### Results



Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21.1	Pass
Humidity	10	70	%	27.6	Pass
Velocity	4.2	4.4	m/s	4.40	Pass
Probe Acceleration	14	18	g's	16.5	Pass
Lateral Upper Spine Acceleration	13	17	g's	14.0	Pass
Lateral Lower Spine Acceleration	7	11	g's	10.3	Pass
Upper Thorax Rib Deflection	32	40	mm	34.0	Pass
Middle Thorax Rib Deflection	39	45	mm	40.5	Pass
Lower Thorax Rib Deflection	35	43	mm	37.4	Pass

#### Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	MSI 64C-2000	A260487	8/22/2019	2/20/2020
Upper Spine Y Accelerometer	ENDEVCO 7264CT	AC-P51668	10/29/2019	4/28/2020
Lower Spine Y Accelerometer	ENDEVCO 7264	AC-P64147	10/29/2019	4/28/2020
Upper Thorax Rib Potentiometer	Servo 08CT1-3725	DS-451GFE	10/29/2019	4/28/2020
Middle Thorax Rib Potentiometer	Servo 08TC1-3745	DS-040GFE	10/29/2019	4/28/2020
Lower Thorax Rib Potentiometer	Servo 08TC1-3725	DS-1156GFE	10/29/2019	4/28/2020

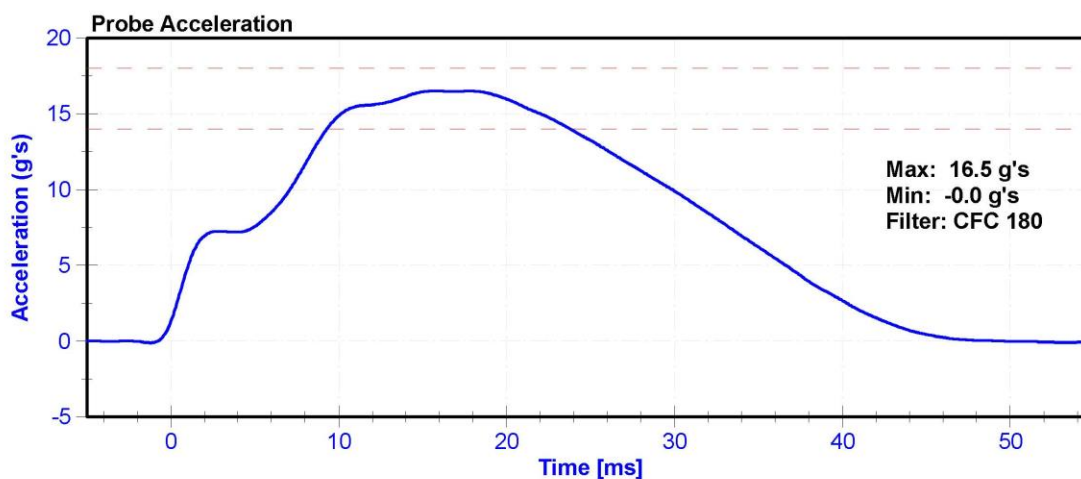

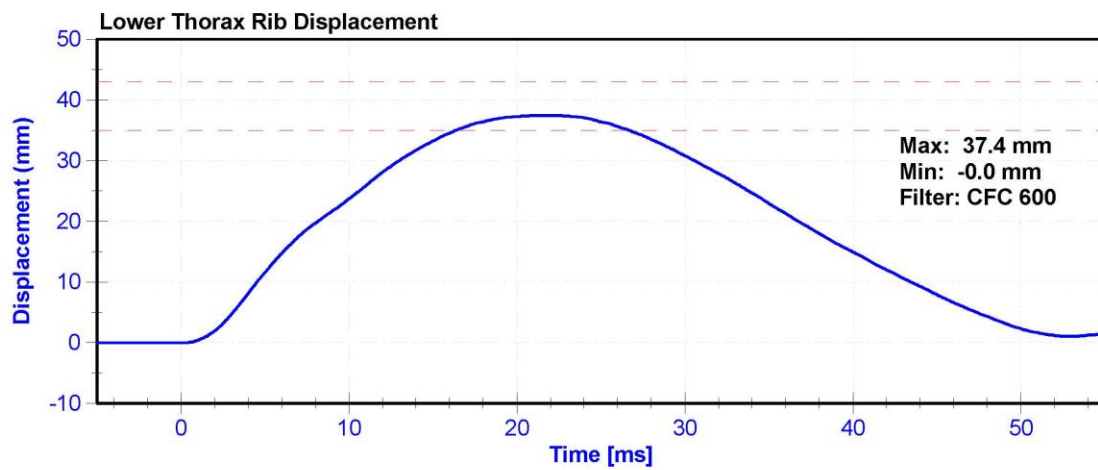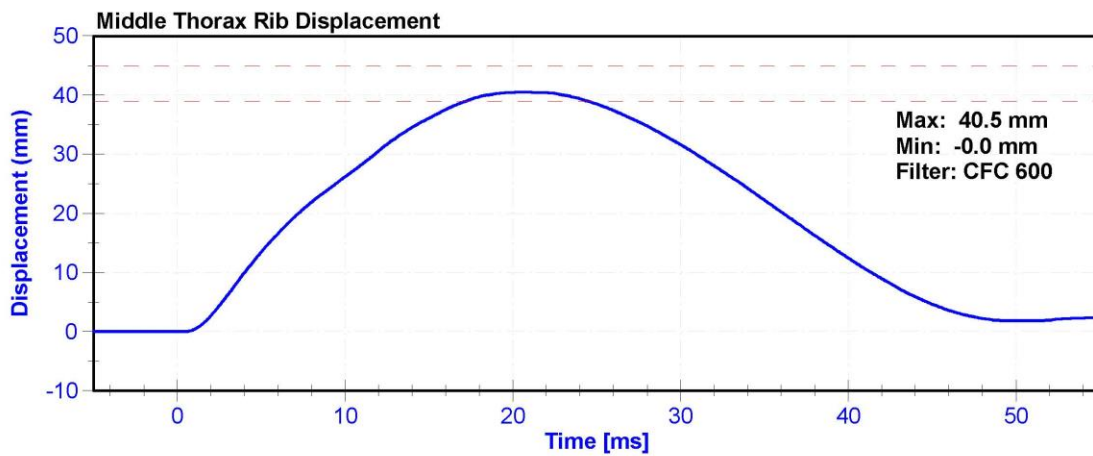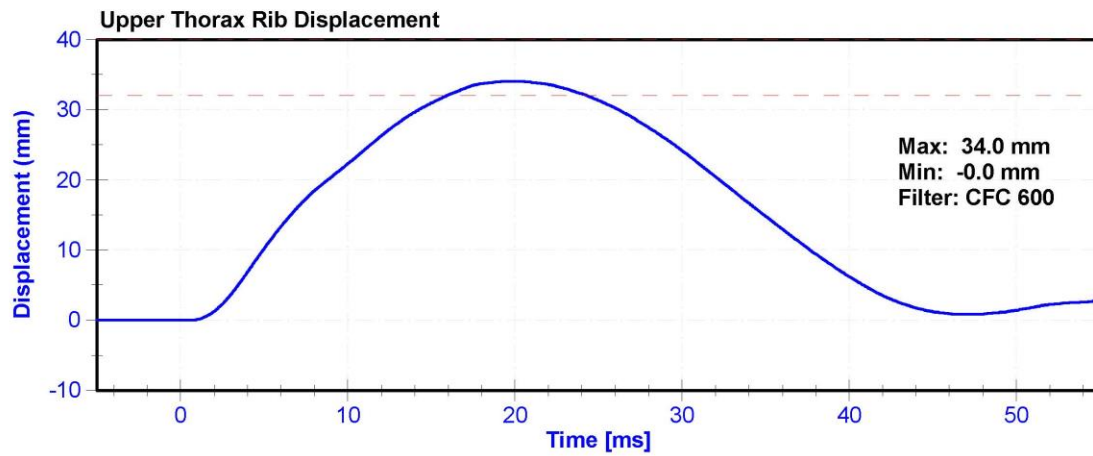

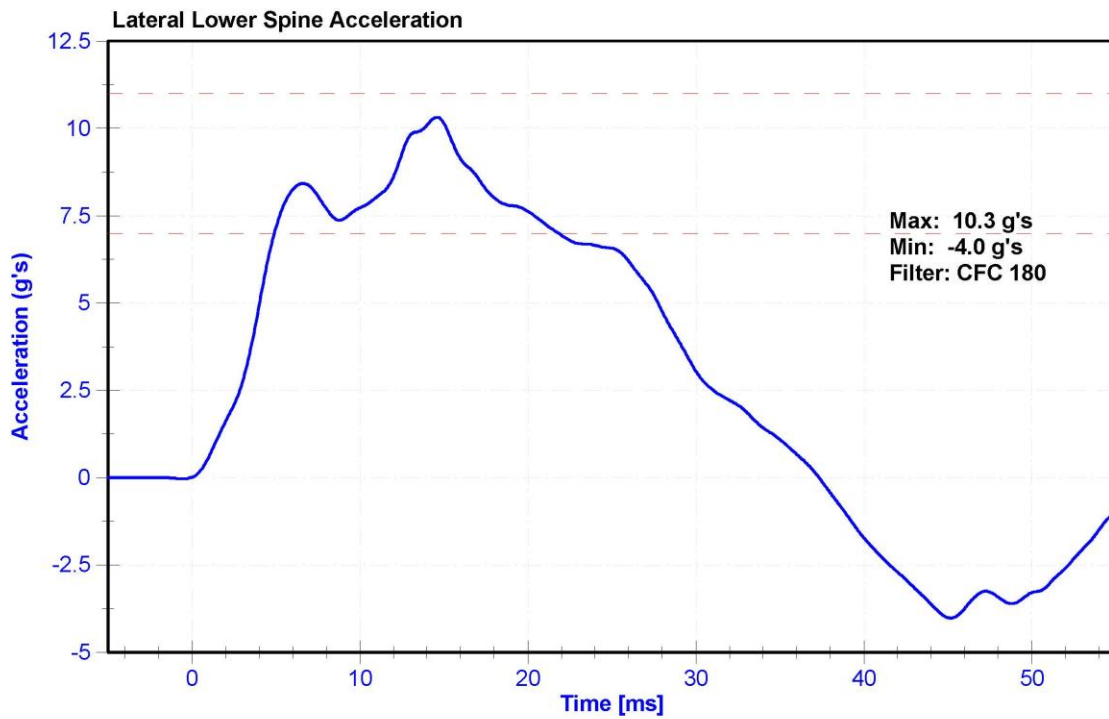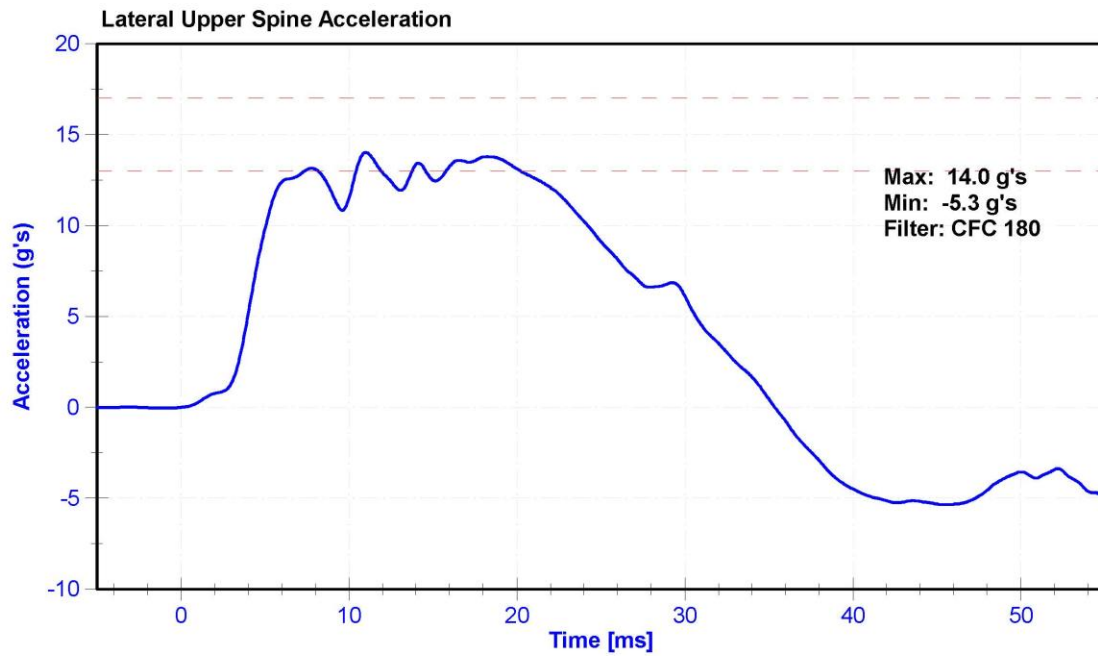


ATD Manufacturer	FTSS	Test Technician	D.Reinhard
ATD Serial Number	300	Laboratory Supervisor	K. Brogan

#### Results



Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21.6	Pass
Humidity	10	70	%	27.5	Pass
Velocity	4.2	4.4	m/s	4.39	Pass
Probe Acceleration	12	16	g's	14.8	Pass
Lateral Lower Spine Acceleration	9	14	g's	11.5	Pass
Upper Abdomen Rib Deflection	36	47	mm	44.5	Pass
Lower Abdomen Rib Deflection	33	44	mm	41.1	Pass


#### Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Probe Accelerometer	MSI 64C-2000	A260487	8/22/2019	2/20/2020
Lower Spine Y Accelerometer	ENDEVCO 7264	AC-P64147	10/29/2019	4/28/2020
Upper Abdomen Rib Potentiometer	Servo 08CT1-3725	DS-308GFE	10/29/2019	4/28/2020
Lower Abdomen Rib Potentiometer	Servo 08CT1-3725	DS-307GFE	10/29/2019	4/28/2020

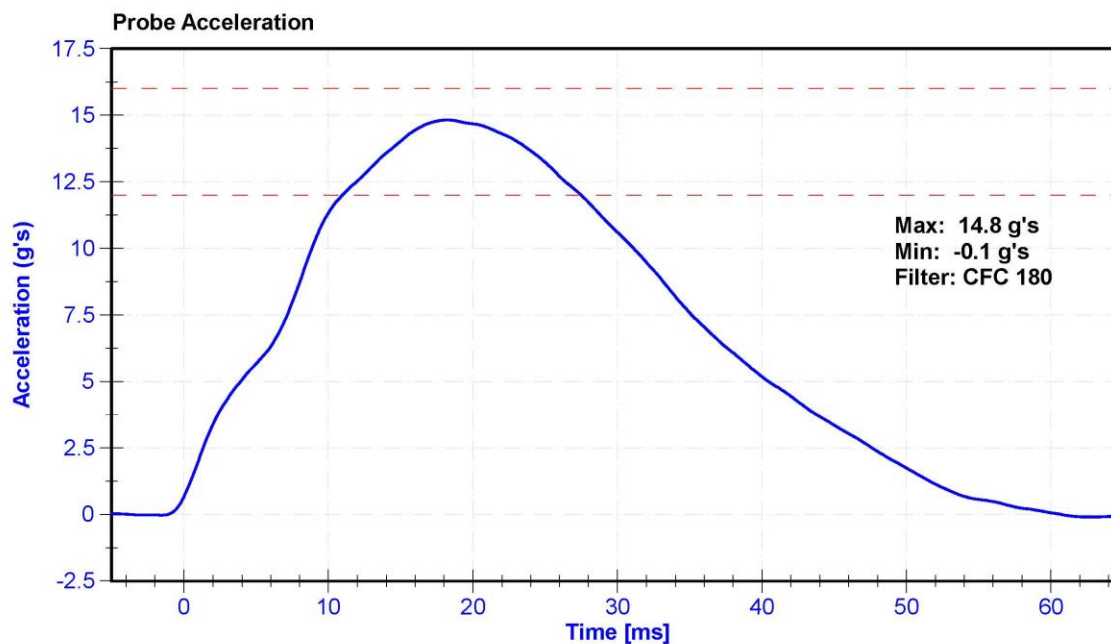



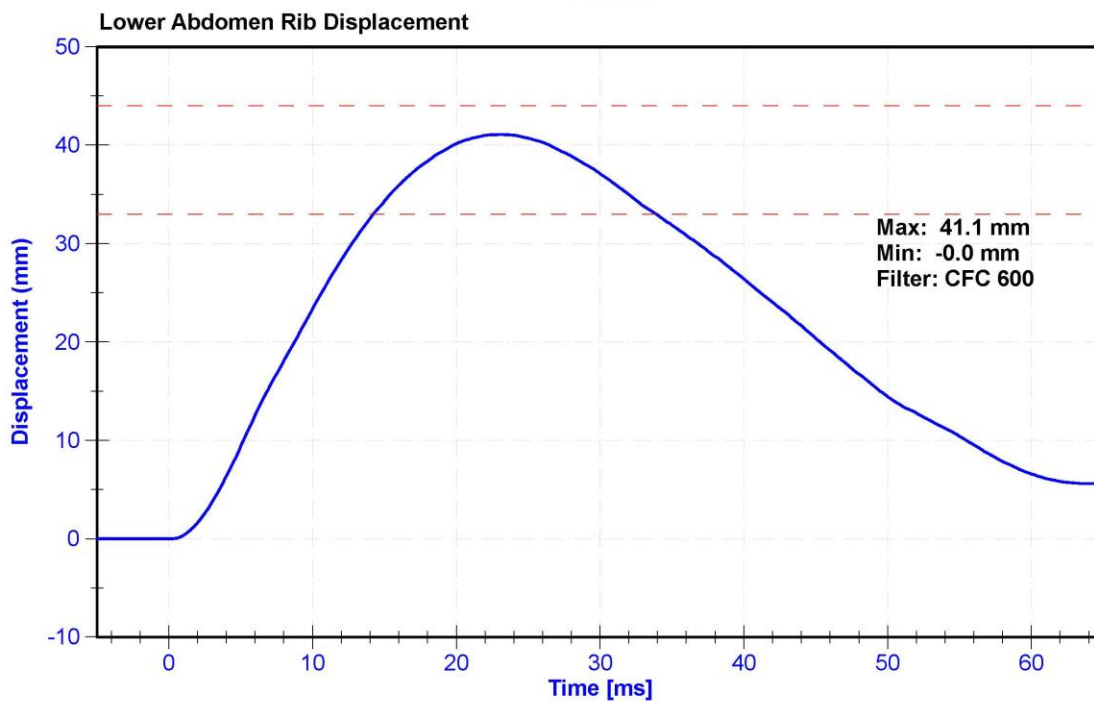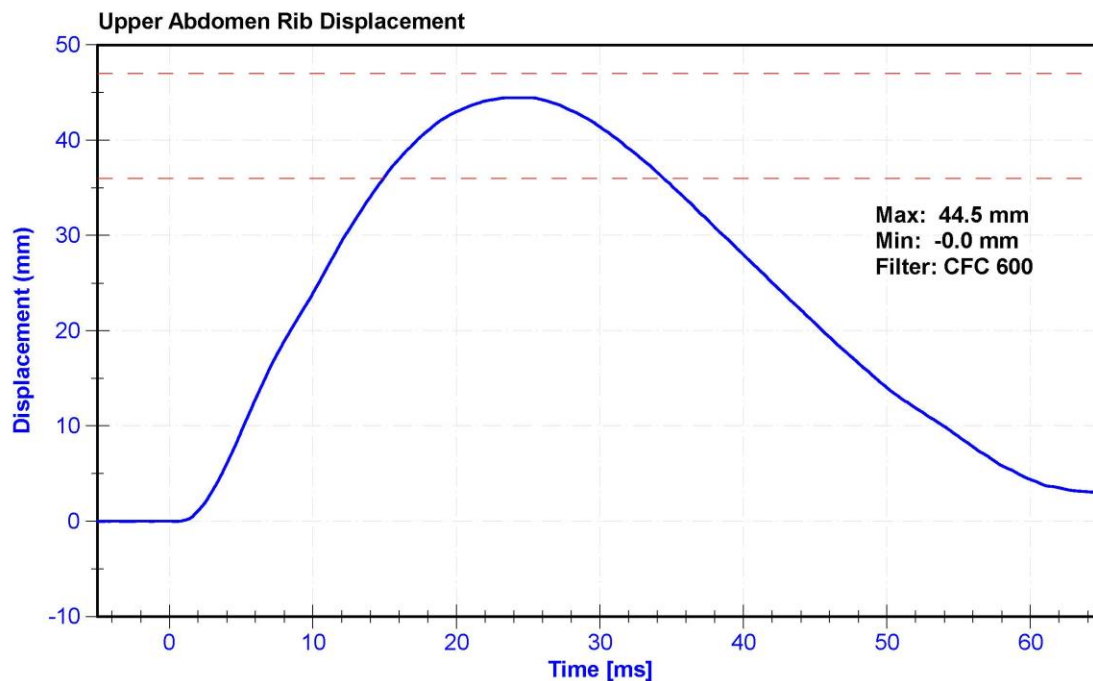

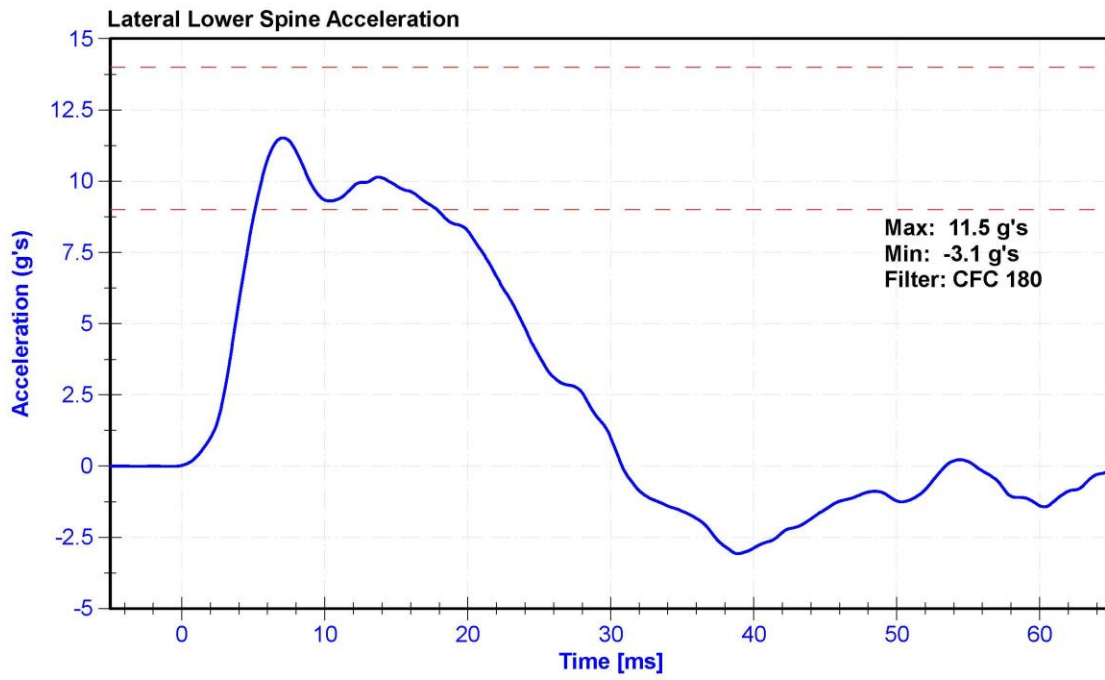


ATD Manufacturer	FTSS	Test Technician	D.Reinhard
ATD Serial Number	300	Laboratory Supervisor	K. Brogan



#### Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21.5	Pass
Humidity	10	70	%	28.2	Pass
Velocity	6.6	6.8	m/s	6.67	Pass
Probe Acceleration	38	47	g's	46.0	Pass
Lateral Pelvis Acceleration after 6ms	34	42	g's	41.9	Pass
Acetabulum Force	3600	4300	N	3941.7	Pass

#### Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	MSI 64C-2000	A260487	8/22/2019	2/20/2020
Pelvis Y Accelerometer	ENDEVCO 7264CT	AC-P51731	10/29/2019	4/28/2020
Acetabulum Load Cell	Denton 3249J	LC-276Fy	9/24/2019	9/23/2020
Certification Plug	SACO	12495	10/02/2018	N/A
Crash Test Plug	SACO	11590	10/04/2016	N/A

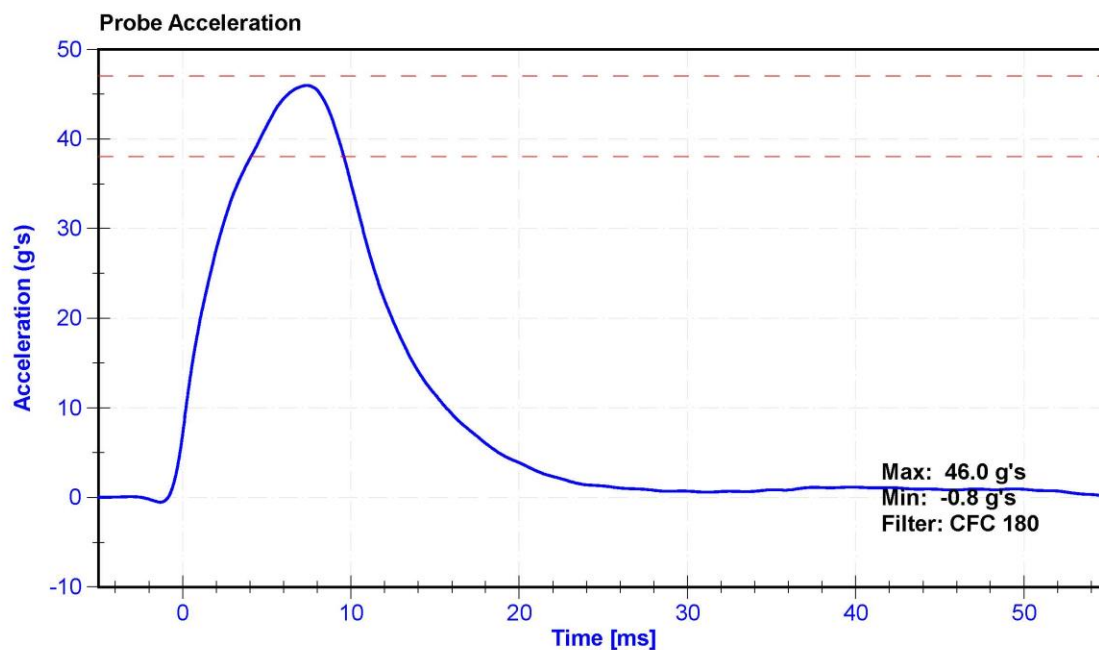

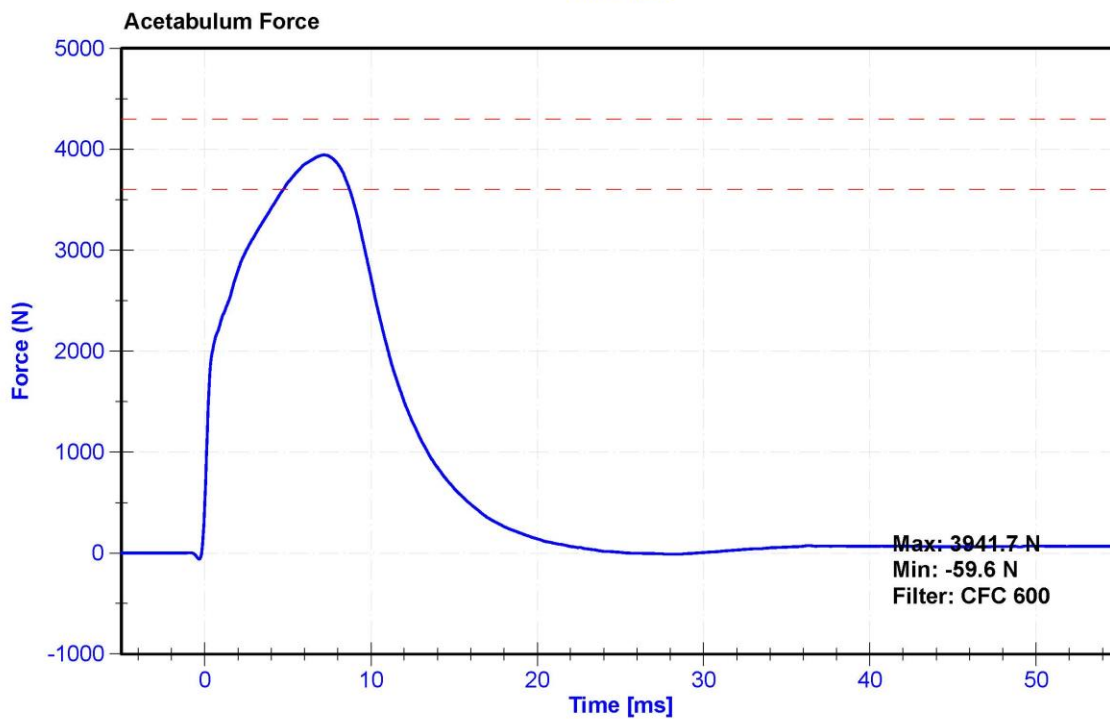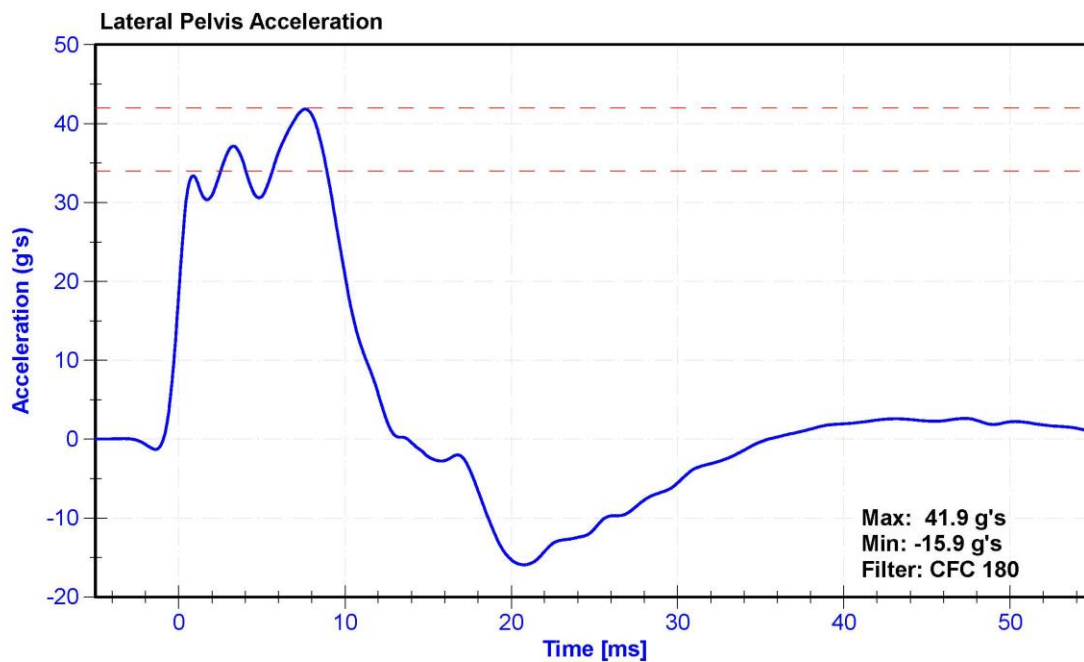





# SID-lls Pelvis Plug Certification Test

Plug S/N 11590

Test Number 3133

Report Number 3126


Test Date 10/4/2016 12:36:56 PM

Test Results		
	Spec Min	Spec Max
Force @ 0.5 mm (N)	50.00	600.00
Force @ 1.5 mm (N)	850.00	1,400.00
Force @ 2.5 mm (N)	1,306.00	1,618.00
Force @ 3.0 mm (N)	1,361.00	1,673.00

Testing Machine STM-20 5965542  
Load Cell S/N (TT240813), Units (LBS) 1000

Crosshead Speed (mm/min) or Rate 12.7  
Extension or Position Measured by XHD\_100 (XHD100)

Notes:

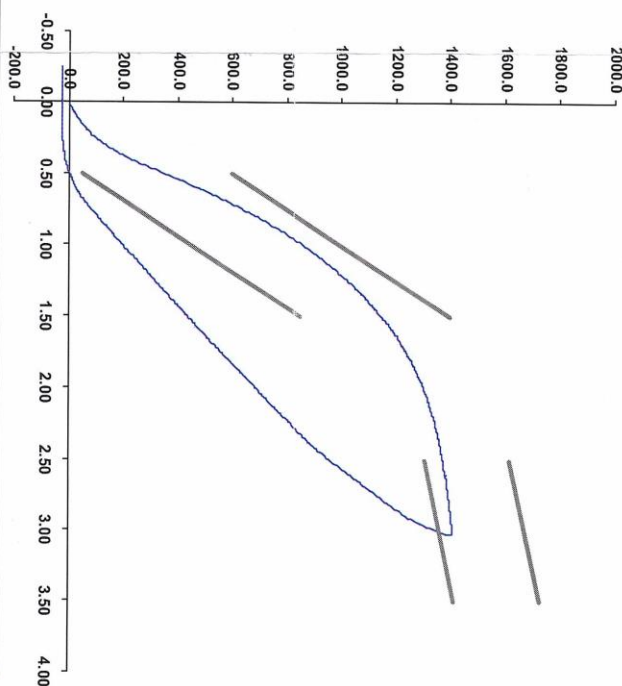

Operator DC

Part Number 180-4450

Template No 107  
SACO Research

04-Oct-16

By: DC

Date: 10/4/16

SACO Research 41735 Elm St, #401 Murrieta, CA 92562 Tel 310-694-2082 FAX



300 cet 211  
11/6/19  
Pass

# SID-11s Pelvis Plug Certification Test

Plug S/N 12495

Test Number 7422


Report Number 7436

Test Date 10/2/2018 7:58:50 AM

Test Results	Spec Min	Spec Max
Force @ 0.5 mm (N)	289.09	50.00
Force @ 1.5 mm (N)	1,135.67	600.00
Force @ 2.5 mm (N)	1,441.89	1,400.00
Force @ 3.0 mm (N)	1,500.79	1,618.00

Testing Machine STM-20 5965542  
Load Cell S/N (F1360947), Units (LBS) 1000  
Crosshead Speed (mm / min ) or Rate 12.7  
Extension or Position Measured by XHD\_100 (XHD100)

Notes:

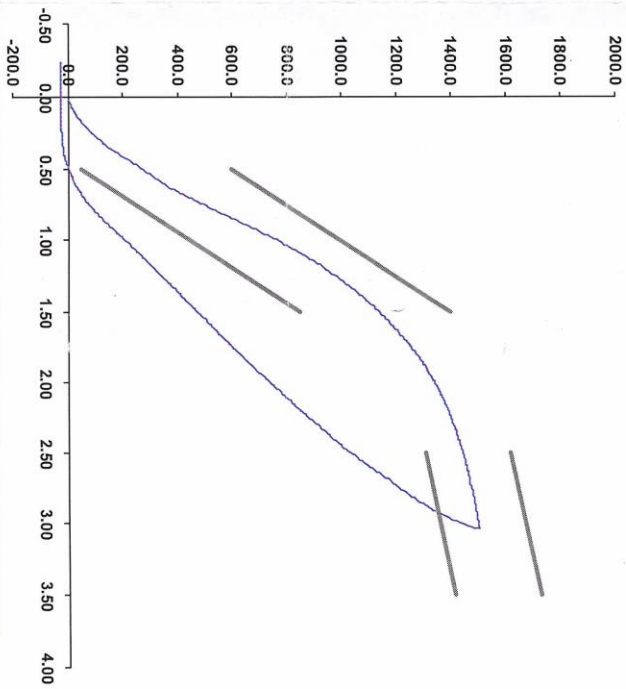

Operator DC

Part Number 180-4450

Template No 107 02-Oct-18  
SACO Research

By: DC

Date: 10/2/18

SACO Research 41735 Elm St. #401 Murrieta, CA 92562 Tel 310-694-2082 FAX


ATD Manufacturer	FTSS	Test Technician	K. Brogan
ATD Serial Number	300	Laboratory Supervisor	D.Reinhard



#### Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21.4	Pass
Humidity	10	70	%	28.5	Pass
Velocity	4.2	4.4	m/s	4.40	Pass
Probe Acceleration	36	45	g's	39.7	Pass
Lateral Pelvis Acceleration	28	39	g's	30.4	Pass
Iliac Force	4100	5100	N	4532.3	Pass

#### Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	MSI 64C-2000	A260487	8/22/2019	2/20/2020
Pelvis Y Accelerometer	ENDEVCO 7264CT	AC-P51731	10/29/2019	4/28/2020
Iliac Load Cell	DENTON 3228J	LC-280Fy	6/20/2019	6/19/2020

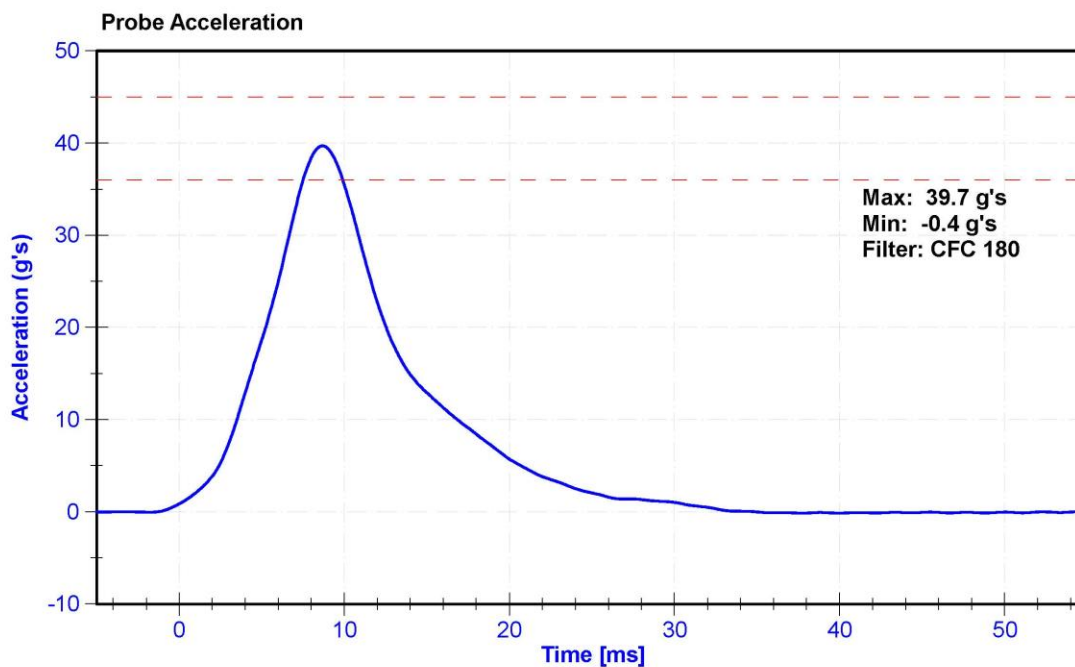

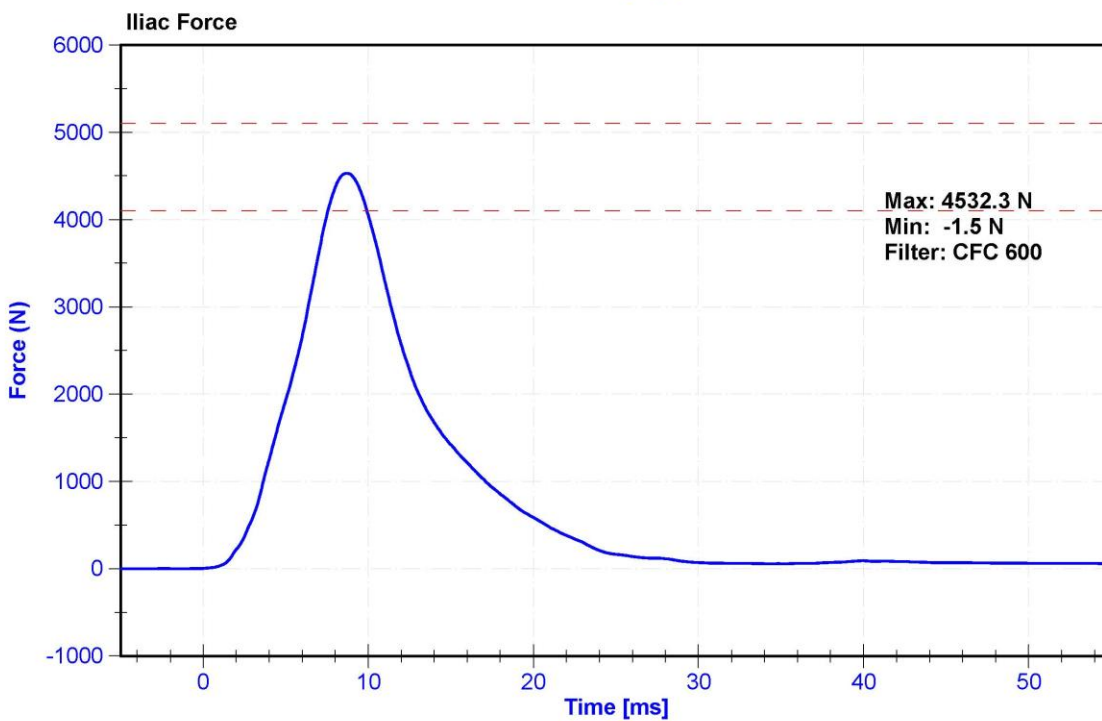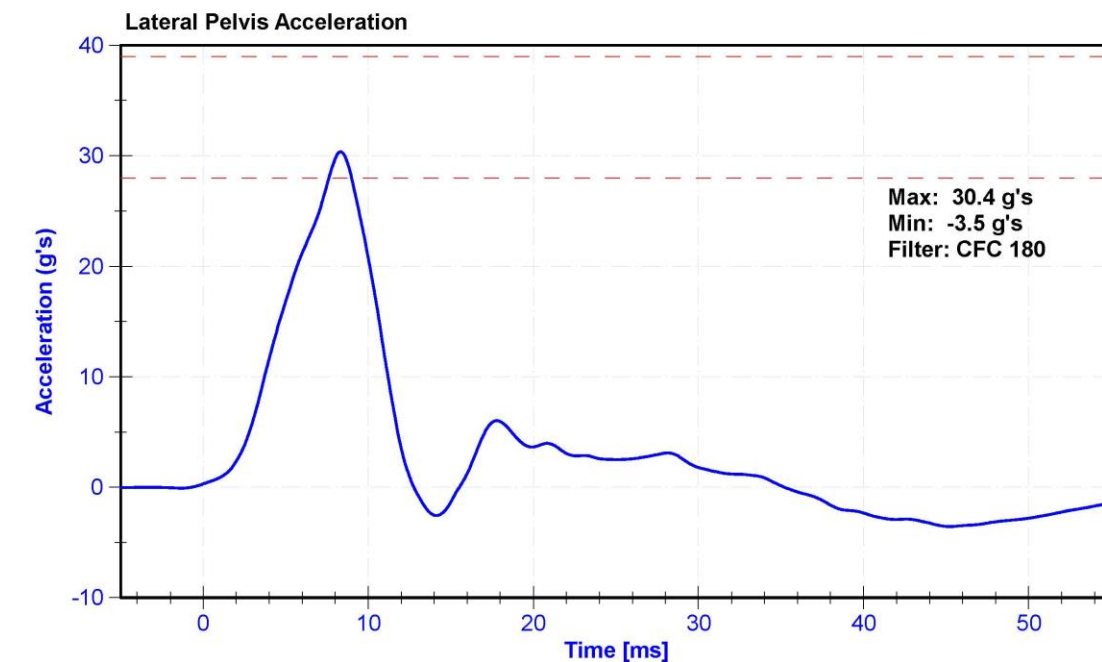



## **APPENDIX D**

### **TEST EQUIPMENT AND INSTRUMENTATION CALIBRATION DATA**

**Table 1 – Dummy Instrumentation (ES-2re)**

			ES-2re S/N: F034		
			Serial Number	Manufacturer	Calibration Date
Head Accelerometers	Primary	X	AC-P49204	ENDEVCO	10/29/2019
		Y	AC-P63981	ENDEVCO	10/29/2019
		Z	AC-P64007	ENDEVCO	10/29/2019
	Redundant	X	AC-P52003	ENDEVCO	10/29/2019
		Y	AC-P64122	ENDEVCO	10/29/2019
		Z	AC-P51962	ENDEVCO	10/29/2019
Thorax Rib Displacement Potentiometers	Upper	Y	DS-183GFE	Honeywell	10/31/2019
	Middle	Y	DS-184GFE	Honeywell	10/31/2019
	Lower	Y	DS-182GFE	Honeywell	10/31/2019
Abdomen Load Cells	Forward	Y	LC-1440	Denton	6/14/2019
	Middle	Y	LC-1525	Denton	6/5/2019
	Rear	Y	LC-1528	Denton	6/14/2019
Lower Spine Accelerometers (T12)		X	AC-P17299	ENDEVCO	10/29/2019
		Y	AC-P39731	ENDEVCO	10/29/2019
		Z	AC-P22639	ENDEVCO	10/29/2019
Pubic Symphysis Load Cell		Y	LC-464fy	Denton	6/14/2019

**Table 2 – Dummy Instrumentation (SID-IIs)**

				SID-IIs S/N: 300		
				Serial Number	Manufacturer	Calibration Date
Head Accelerometers		Primary	X	AC-P68057	ENDEVCO	10/29/2019
			Y	AC-P79189	ENDEVCO	10/29/2019
			Z	AC-P52095	ENDEVCO	10/29/2019
		Redundant	X	AC-P59018	ENDEVCO	10/29/2019
			Y	AC-P58986	ENDEVCO	10/29/2019
			Z	AC-P58777	ENDEVCO	10/29/2019
Displacement Potentiometers	Thoracic Rib	Upper	Y	DS-451GFE	Servo	10/29/2019
		Middle	Y	DS-040GFE	Servo	10/29/2019
		Lower	Y	DS-1156GFE	Servo	10/29/2019
	Abdominal Rib	Upper	Y	DS-308GFE	Servo	10/29/2019
		Lower	Y	DS-307GFE	Servo	10/29/2019
Lower Spine Accelerometers (T12)			X	AC-P58883	ENDEVCO	10/29/2019
			Y	AC-P64147	ENDEVCO	10/29/2019
			Z	AC-P58786	ENDEVCO	10/29/2019
Acetabulum Load Cell			Y	LC-276Fy	Denton	9/24/2019
Iliac Wing Load Cell			Y	LC-280Fy	Denton	6/20/2019
Pelvis Plug (struck side)				12318	SACO	3/21/2018
Pelvis Plug (non-struck side)				-	-	-

**Table 3 – Vehicle Instrumentation**

Vehicle Instrumentation			Serial Number	Manufacturer	Calibration Date
1	Vehicle Center of Gravity	X	A282627	MSI 1201-1000	3/15/2019
	Vehicle Center of Gravity	Y	A282655	MSI 1201-1000	3/15/2019
	Vehicle Center of Gravity	Z	A282722	MSI 1201-1000	3/15/2019
2	Right Sill at Front Seat	X	AC-A250387	MSI 1201-1000	5/23/2019
	Right Sill at Front Seat	Y	AC-A279976	MSI 1201-1000	5/29/2019
	Right Sill at Front Seat	Z	AC-A281004	MSI 1201-1000	5/23/2019
3	Right Sill at Rear Seat	X	AC-A255838	MSI 1201-1000	7/10/2019
	Right Sill at Rear Seat	Y	AC-A262043	MSI 1201-1000	7/10/2019
	Right Sill at Rear Seat	Z	AC-A262045	MSI 1201-1000	7/10/2019
4	Left Sill at Front Door	Y	AC-A250345	MSI 1201-1014	10/9/2019
5	Left Sill at Rear Door	Y	AC-A280192	MSI 1201-1000	10/15/2019
6	Left A-Post Lower	Y	AC-A250347	MSI 1201-1000	5/29/2019
7	Left A-Post Middle	Y	A284265	MSI 1201-1000	10/1/2019
8	Left B-Post Lower	Y	AC-A206913	MSI 1201-1000	9/10/2019
9	Left B-Post Middle	Y	AC-A280339	MSI 1201-1000	5/9/2019
10	Front Seat Track	Y	AC-A279979	MSI 1201-1000	10/10/2019
11	Rear Seat Track or Structure	Y	AC-A247197	MSI 1201-1000	10/18/2019
12	Right Rear Occ. Compartment	Y	A283630	MSI 1201-1000	10/25/2019
13	Engine Block	X	AC-A254656	MSI 1201-1000	10/9/2019
	Engine Block	Y	AC-A254660	MSI 1201-1000	10/9/2019
14	Rear Floorpan Above Axle	X	A282636	MSI 1201-1000	3/15/2019
	Rear Floorpan Above Axle	Y	A284260	MSI 1201-1000	4/4/2019
	Rear Floorpan Above Axle	Z	A284310	MSI 1201-1000	4/4/2019

**TABLE 4 – MDB Instrumentation**

MDB Instrumentation		Serial Number	Manufacturer	Calibration Date
MDB Center of Gravity	X	A250366	MSI 1201-1000	3/18/2019
MDB Center of Gravity	Y	A280851	MSI 1201-1000	3/18/2019
MDB Center of Gravity	Z	A281024	MSI 1201-1000	4/24/2019
Left Frame at Rear Axle Centerline	X	A254666	MSI 1201-1000	5/22/2019
Left Frame at Rear Axle Centerline	Y	A280866	MSI 1201-1000	5/22/2019