

**Final Report Number: NCAP-TRC-20-003**

**New Car Assessment Program (NCAP)**

**Frontal Barrier Impact Test**

**GENERAL MOTORS LLC**

**2020 Cadillac XT5 SUV**

**NHTSA Number: M20200106**


**PREPARED BY:**

**Transportation Research Center Inc.**

**10820 State Route 347**

**P. O. Box B-67**

**East Liberty, OH 43319**

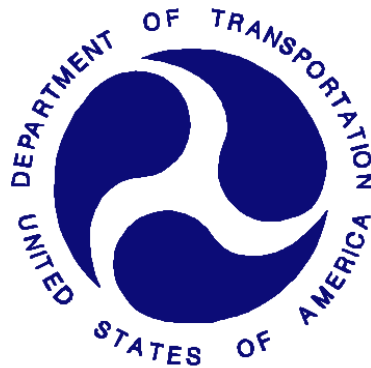

**Report Date: March 2, 2020**

**FINAL REPORT**

**Prepared For:**

**U. S. DEPARTMENT OF TRANSPORTATION**

**National Highway Traffic Safety Administration**

**Office of Crashworthiness Standards**

**1200 New Jersey Ave, SE Room W43-410**

**Washington, DC 20590**

## Notice

Transportation Research Center Inc. does not endorse or certify products of manufacturers. The manufacturer's name appears solely to identify the test article. Transportation Research Center Inc. assumes no liability for the report or use thereof. It is responsible for the facts and the accuracy of the data presented herein. This report does not constitute a standard, specification, or regulation.

Prepared By: ILO Project Operations Group

Approved By: John Shultz

Approval Date: March 2, 2020

FINAL REPORT ACCEPTANCE BY OCWS:

---

Division Chief, New Car Assessment Program  
NHTSA, Office of Crashworthiness Standards

Date \_\_\_\_\_

---

COTR, New Car Assessment Program  
NHTSA, Office of Crashworthiness Standards

Date \_\_\_\_\_

1. Report No. NCAP-TRC-20-003	2. Government Accession No.	3. Recipient's Catalog No.																																																																									
4. Title and Subtitle Final Report of NEW CAR ASSESSMENT PROGRAM Frontal Impact Testing of a 2020 Cadillac XT5 SUV NHTSA No. M20200106				5. Report Date March 2, 2020																																																																							
				6. Performing Organization Code TRC Inc.																																																																							
7. Author(s) John Shultz, Project Manager				8. Performing Organization Report No. 191212																																																																							
9. Performing Organization Name and Address Transportation Research Center Inc. 10820 State Route 347 East Liberty, OH 43319-0367				10. Work Unit No. (TRAIS)																																																																							
				11. Contract or Grant No. 693JJ919D000007																																																																							
12. Sponsoring Agency Name and Address U. S. Department of Transportation National Highway Traffic Safety Administration Office of Crashworthiness Standards 1200 New Jersey Ave SE Room W43-410, Washington, DC 20590				13. Type of Report and Period Covered Final Report December 12, 2019 – March 2, 2020																																																																							
				14. Sponsoring Agency Code NRM-110																																																																							
15. Supplemental Notes																																																																											
16. Abstract <p>A 56.0 km/h NCAP Frontal Impact Test was conducted on a 2020 Cadillac XT5 SUV, in accordance with the specifications the Office of Crashworthiness Standards Laboratory Procedure for NCAP Full Frontal Rigid Barrier Impact Testing. This test was conducted to obtain data related to FMVSS Nos. 208, 212, 219 (partial), and 301 performance. The test was conducted at the Transportation Research Center Inc. in East Liberty, Ohio on December 12, 2019.</p> <p>The impact velocity was 56.55 km/h, and the ambient temperature at the barrier face at the time of impact was 20.8° C. The target vehicle post-test maximum crush was 441 millimeters at crush zone 5 at right side. The test vehicle's performance is as follows:</p> <table border="1"> <thead> <tr> <th rowspan="2">Measurement Description</th> <th colspan="3">Driver ATD</th> <th colspan="3">Passenger ATD</th> </tr> <tr> <th>Units</th> <th>Threshold</th> <th>Result</th> <th>Units</th> <th>Threshold</th> <th>Result</th> </tr> </thead> <tbody> <tr> <td>Head Injury Criteria (HIC<sub>15</sub>)</td> <td>NA</td> <td>700</td> <td>145</td> <td>NA</td> <td>700</td> <td>287</td> </tr> <tr> <td>Maximum Chest Compression</td> <td>mm</td> <td>63</td> <td>-15.6</td> <td>mm</td> <td>52</td> <td>-16.2</td> </tr> <tr> <td>3ms Chest Clip</td> <td>Gs</td> <td>60</td> <td>39.2</td> <td>Gs</td> <td>60</td> <td>45.5</td> </tr> <tr> <td>Nij</td> <td>NA</td> <td>1</td> <td>0.24</td> <td>NA</td> <td>1</td> <td>0.37</td> </tr> <tr> <td>Neck Tension</td> <td>Newtons</td> <td>4170</td> <td>837.1</td> <td>Newtons</td> <td>2620</td> <td>688.0</td> </tr> <tr> <td>Neck Compression</td> <td>Newtons</td> <td>4000</td> <td>-49.3</td> <td>Newtons</td> <td>2520</td> <td>-235.9</td> </tr> <tr> <td>Left Femur Force</td> <td>Newtons</td> <td>10000</td> <td>-948.7</td> <td>Newtons</td> <td>6800</td> <td>-98.7</td> </tr> <tr> <td>Right Femur Force</td> <td>Newtons</td> <td>10000</td> <td>-2408.8</td> <td>Newtons</td> <td>6800</td> <td>-77.2</td> </tr> </tbody> </table>							Measurement Description	Driver ATD			Passenger ATD			Units	Threshold	Result	Units	Threshold	Result	Head Injury Criteria (HIC <sub>15</sub> )	NA	700	145	NA	700	287	Maximum Chest Compression	mm	63	-15.6	mm	52	-16.2	3ms Chest Clip	Gs	60	39.2	Gs	60	45.5	Nij	NA	1	0.24	NA	1	0.37	Neck Tension	Newtons	4170	837.1	Newtons	2620	688.0	Neck Compression	Newtons	4000	-49.3	Newtons	2520	-235.9	Left Femur Force	Newtons	10000	-948.7	Newtons	6800	-98.7	Right Femur Force	Newtons	10000	-2408.8	Newtons	6800	-77.2
Measurement Description	Driver ATD			Passenger ATD																																																																							
	Units	Threshold	Result	Units	Threshold	Result																																																																					
Head Injury Criteria (HIC <sub>15</sub> )	NA	700	145	NA	700	287																																																																					
Maximum Chest Compression	mm	63	-15.6	mm	52	-16.2																																																																					
3ms Chest Clip	Gs	60	39.2	Gs	60	45.5																																																																					
Nij	NA	1	0.24	NA	1	0.37																																																																					
Neck Tension	Newtons	4170	837.1	Newtons	2620	688.0																																																																					
Neck Compression	Newtons	4000	-49.3	Newtons	2520	-235.9																																																																					
Left Femur Force	Newtons	10000	-948.7	Newtons	6800	-98.7																																																																					
Right Femur Force	Newtons	10000	-2408.8	Newtons	6800	-77.2																																																																					
17. Key Words 56.3 km/h (35 mph) Full Frontal Rigid Barrier Impact Test New Car Assessment Program (NCAP)				18. Distribution Statement Copies of this report are available from: National Highway Traffic Safety Administration Technical Information Services Division 1200 New Jersey Ave, SE Washington, DC 20590																																																																							
19. Security Classif. (of this report) Unclassified	20. Security Classif. (of this page) Unclassified		21. Number of Pages 177		22. Price																																																																						

## Table of Contents

<u>Section</u>		<u>Page</u>
1	Purpose and Summary of the Test	1
2	Occupant and Vehicle Information / Data Sheets	3
<u>Data Sheet</u>		<u>Page</u>
1	General Test and Vehicle Parameter Data	4
2	Seat Adjustment, Fuel System, and Steering Wheel Data	8
3	Dummy Longitudinal Clearance Dimensions	10
4	Dummy Lateral Clearance Dimensions	11
5	Seat Belt Positioning Data	12
6	High-Speed Camera Locations and Data	13
7	Vehicle Accelerometer Locations	15
8	Photographic Reference Target Locations	16
9	Load Cell Locations on Fixed Barrier	17
10	Test Vehicle Summary of Results	18
11	Post-Test Observations	19
12	Vehicle Profile Measurements	20
13	Accident Investigation Division Data	22
14	Vehicle Intrusion Measurements	23
15	Summary of Indicant FMVSS No. 212 and FMVSS No. 219 (Partial) Data	25
16	FMVSS 301 Barrier Impact and Static Rollover Results	26
17	Dummy/Vehicle Temperature Stabilization Chart	28
<u>Appendix</u>		<u>Page</u>
A	Photographs	A-1
B	Vehicle and Dummy Response Data Plots	B-1
C	Dummy Calibration and Performance Verification Data	C-1
D	Test Equipment and Instrumentation Calibration	D-1



## **1: PURPOSE AND SUMMARY OF THE TEST**

### **PURPOSE**

This 56 km/h frontal barrier impact test is part of the Vehicle Barrier Impact Testing Program sponsored by the National Highway Traffic Safety Administration (NHTSA) under Contract No. 693JJ919D000007. The purpose of this test was to obtain vehicle crashworthiness and occupant restraint system performance data for consumer information purposes.

This 56 km/h frontal barrier impact test was conducted in accordance with the Office of Crashworthiness Standards Laboratory Test Procedure or NCAP Full Frontal Rigid Barrier Impact Testing dated May 2018.

### **SUMMARY**

A load cell barrier consisting of 288 load cells was impacted by a 2020 Cadillac XT5 SUV at a velocity of 56.55 km/h. The test was performed at Transportation Research Center, Inc. on December 12, 2019. Pre- and post-test photographs of the vehicle and dummies can be found in Appendix A.

One real-time camera and 16 high-speed cameras were used to document the frontal barrier impact event. Camera locations and other pertinent camera information can be found in this report.

One Part 572E 50th percentile male anthropomorphic test device (ATD) was placed in the driver seating position and one Part 572O 5th percentile female ATD was placed in the right-front passenger position according to dummy placement instructions specified in the Laboratory Procedure for NCAP Full Frontal Rigid Barrier Impact Testing.

Both ATDs were fully instrumented with head, chest and pelvis tri-axial accelerometers, chest displacement potentiometers, upper neck transducers, femur load cells, and lower leg instrumentation.

The driver (position 1) ATD (Serial No. 037), and the right-front passenger (position 2) ATD (Serial No. EB7513) were qualified prior to this test. Certification details, along with instrumentation calibration data, are found in Appendix C of this report.

The 106 channels of data were recorded on an on-board data acquisition system. Appendix B contains the vehicle, load cell barrier and dummy response data traces.

There was 100.0 percent windshield retention and no intrusion into the protected zone of the windshield during the event. There was no Stoddard solvent leakage (or electrolyte spillage) after the event or during any phase of the static rollover.

The maximum static crush of the vehicle was 441 mm and both the driver and passenger side doors remained closed during the impact event and were operable after the impact.

The driver's visible contact points were as follows: front airbag, headrest and knee airbag. The passenger's visible contact points were as follows: front airbag, headrest and glove box.

The occupant data is summarized below:

ATD Position	HIC <sub>15</sub>	Nij	Neck Tension (N)	Neck Compression (N)	3 ms Chest Clip (Gs)	Chest Disp. (mm)	Left Femur (N)	Right Femur (N)
Driver (50 <sup>th</sup> Male)	145	0.24	837.1	-49.3	39.2	-15.6	-948.7	-2408.8
Passenger (5 <sup>th</sup> Female)	287	0.37	688.0	-235.9	45.5	-16.2	-98.7	-77.2

#### **TEST COMMENTS:**

Driver Right Foot Z vs. Time; Questionable data throughout

Barrier Fx - Row 7, Column 7; Questionable data

Barrier Fx - Row 8, Column 2; Questionable data

## **2.2 REPORT AREA 2: DATA SHEETS**

## DATA SHEET NO. 1 - GENERAL TEST AND VEHICLE PARAMETER DATA

Test Vehicle: 2020 Cadillac XT5 SUV  
 Test Program: NCAP Frontal Impact

NHTSA No.: M20200106  
 Test Date: 12/12/2019

### TEST VEHICLE INFORMATION

NHTSA No.	M20200106
Model Year	2020
Make	Cadillac
Model	XT5
Body Style	MPV
VIN	1GYKNDRS7LZ121480
Body Color	Garnet Metallic
Odometer Reading (km/mi)	18 mi
Engine Displacement (L)	3.6
Type/No. Cylinders	V/6
Engine Placement	Front Transverse
Transmission Type	Automatic
Transmission Speeds	9
Overdrive	Yes
Final Drive	AWD
Roof Rack	No
Sunroof/T-Top	Yes
Running Boards	No
Tilt Steering Wheel	Yes
Power Seats	Yes
Anti-Lock Brakes (ABS)	Yes
Automatic Door Locks (ADLs)	Yes

### TEST VEHICLE OPTIONS

Traction Control System (TCS)	Yes
Power Steering	Yes
Power Window Auto-Reverse	Yes
Driver Frontal Airbag	Yes
Driver Curtain Airbag	Yes
Driver Head/Torso Airbag	No
Driver Torso Airbag	No
Driver Torso/Pelvis Airbag	Yes
Driver Pelvis Airbag	No
Driver Knee Airbag	Yes
Front Pass. Frontal Airbag	Yes
Front Pass. Curtain Airbag	Yes
Front Pass. Head/Torso Airbag	No
Front Pass. Torso Airbag	No
Front Pass. Torso/Pelvis Airbag	Yes
Front Pass. Pelvis Airbag	No
Front Pass. Knee Airbag	No
Driver Pretensioner	Yes
Driver Load Limiter	Yes
Front Pass. Pretensioner	Yes
Front Pass. Load Limiter	Yes
Other:	No

Does owner's manual provide instructions to turn off automatic door locks?

No

### DATA FROM CERTIFICATION LABEL

Manufactured by	GENERAL MOTORS LLC	GVWR (kg)	2722 (6001 LB)
Date of Manufacture		GAWR Front ( kg )	1350 (2976 LB)
		GAWR Rear ( kg )	1450 (3196 LB)


### VEHICLE SEATING AND WEIGHT CAPACITY

Measured Parameter	Front	Rear	Third	Total
Type of Seats	Bucket	Split Bench	N/A	
Number of Occupants	2	3	N/A	5
Capacity Wt. (VCW) (kg)				738.0
Cargo Wt. (RCLW) (kg)				398.0

## DATA SHEET NO. 1 - GENERAL TEST AND VEHICLE PARAMETER DATA (CONT'D)

Test Vehicle: 2020 Cadillac XT5 SUV  
Test Program: NCAP Frontal Impact

NHTSA No.: M20200106  
Test Date: 12/12/2019

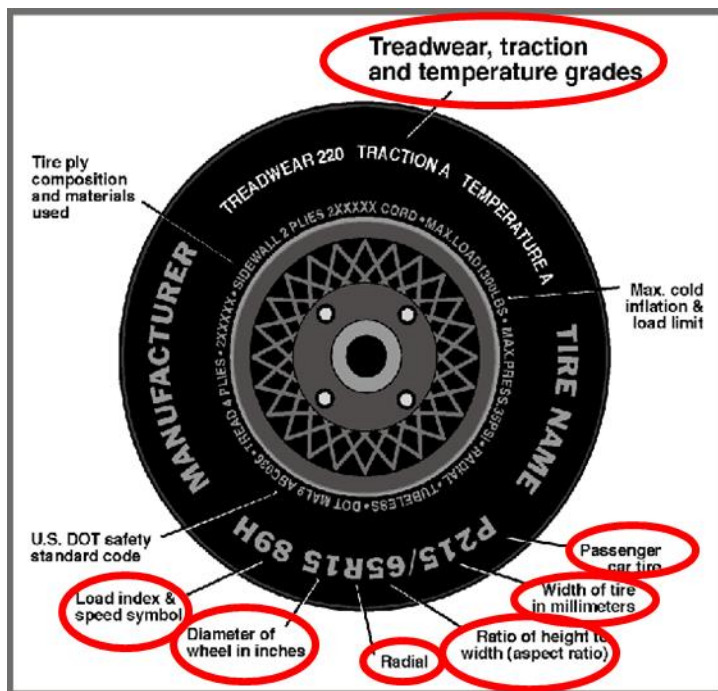

### DATA FROM TIRE PLACARD

Measured Parameter	Front	Rear
Maximum Tire Pressure (kPa)	300	300
Cold / Test Pressure (kPa)	240	240
Recommended Tire Size	235/65R18 H	235/65R18 H
Tire Size on Vehicle	235/65R18 H	235/65R18 H
Tire Manufacturer	Michelin	Michelin
Tire Model	Premier LTX	Premier LTX
Treadwear	620	620
Traction Grade	A	A
Temperature Grade	A	A
Tire Plies Sidewall	2	2
Tire Plies Body	5	5
Load Index/Speed Symbol	106H	106H
Tire Material	Polyester/Polyamide/Steel	Polyester/Polyamide/Steel
DOT Safety Code Right	M3 MB 7B5X 3319	M3 MB 7B5X 3319
DOT Safety Code Left	M3 MB 7B5X 3319	M3 MB 7B5X 3319

# DATA SHEET NO. 1 - GENERAL TEST AND VEHICLE PARAMETER DATA (CONT'D)

Test Vehicle: 2020 Cadillac XT5 SUV  
 Test Program: NCAP Frontal Impact

NHTSA No.: M20200106  
 Test Date: 12/12/2019

## TEST VEHICLE WEIGHTS

	Units	As Delivered (UVW) (Axle)			As Tested (ATW) (Axle)		
		Front	Rear	Total	Front	Rear	Total
Left	kg	583.0	416.4		617.4	525.4	
Right	kg	567.4	392.6		575.8	507.8	
Ratio	%	58.7	41.3		53.6	46.4	
Totals	kg	1150.4	809.0	1959.4	1193.2	1033.2	2226.4

## TARGET TEST WEIGHT CALCULATION

Measured Parameter	Units	Value
Total Delivered Weight (UVW)	kg	1959.4
Weight of 1 P572E ATD & 1 P572O ATD	kg	139.3
Rated Cargo/Luggage Weight (RCLW) <sup>1</sup>	kg	136.0
Vehicle Target Weight (TVTW)	kg	2234.7

## TEST VEHICLE ATTITUDES AND CG

	Units	LF	RF	LR	RR	CG (aft of front)
As Delivered	mm	844	848	895	895	1181
As Tested	mm	837	840	854	859	1327
Post Test	mm	866	795	871	859	

## GENERAL TEST VEHICLE DATA

Measurement Description	Units	Value
Test Vehicle Wheel Base	mm	2860
Total Vehicle Length at Left Side	mm	4560
Total Vehicle Length at Centerline	mm	4815
Total Vehicle Length at Right Side	mm	4569
Weight of Ballast in Cargo Area	kg	112.2
Weight of Vehicle Components Removed	kg	0.0
Amount of Stoddard Solvent in Fuel Tank	liters	76.4

**LIST OF COMPONENTS REMOVED TO MEET TEST WEIGHT:** None

---



---



---

<sup>1</sup>Rated cargo and luggage weight limited to 136.0 kg or 300.0 lbs.

**DATA SHEET NO. 1 - GENERAL TEST AND VEHICLE PARAMETER DATA  
(CONT'D)**

Test Vehicle: 2020 Cadillac XT5 SUV  
Test Program: NCAP Frontal Impact

NHTSA No.: M20200106  
Test Date: 12/12/2019

**TARGET VEHICLE STRUCTURAL MEASUREMENT**

	<b>Elements</b>	<b>Pre-Test (mm)</b>
1	Total Length	4815
2	Total Width	1900
3	Bumper Top Height	600
4	Bumper Bottom Height	470
5	Longitudinal Member Top Height	600
6	Distance Between Longitudinal Members	950
7	Longitudinal Member Width	70
8	Engine Top Height	1050
9	Engine Bottom Height	220
10	Engine and Gearbox Width	700
11	Front Bumper-Engine Distance	596
12	Front Shock Absorber Fixing Height	1015
13	Bonnet Leading Edge Height	975
14	Front Shock Absorber Fixing Width	1210
15	Front Bumper – Front Axle Distance	995
16	Front Axle – A-Pillar Distance	600
17	A-Pillar – B-Pillar Distance	1060
18	B-Pillar – Rear Axle Distance	1225
19	B-Pillar – C-Pillar Distance	940
20	Roof Sill Bottom Height	1495
21	Roof Sill Top Height	1575
22	Floor Sill Bottom Height	420
23	Floor Sill Top Height	465


## DATA SHEET NO. 2 - SEAT ADJUSTMENT, FUEL SYSTEM AND STEERING WHEEL DATA

Test Vehicle: 2020 Cadillac XT5 SUV  
Test Program: NCAP Frontal Impact

NHTSA No.: M20200106  
Test Date: 12/12/2019

### NORMAL DESIGN RIDING POSITION

For adjustable driver and passenger seat backs. Please describe how to position the inclinometer to measure the seat back angle. Include description of the location of the adjustment latch detent, if applicable



	Degree
Driver Seat back angle:	-16.2
Passenger Seat back angle:	-17.6

### SEAT FORE/AFT POSITIONS

Describe the method of determining seat fore/aft positions.

Driver: Mid position, Positioned according to Form 1

Passenger: Full forward, Positioned according to Form 1

	Total Fore/Aft Travel	Placed in Position No.
Driver Seat	310 mm	155 mm
Passenger Seat	250 mm	0 mm


### SEAT BELT UPPER ANCHORAGE

Describe the method of positioning seat belt upper anchorages.

Driver: Uppermost, Positioned according to Form 1

Passenger: Uppermost, Positioned according to Form 1

	Total No. of Positions	Placed in Position No.
Driver Seat	4	1, Uppermost
Passenger Seat	4	1, Uppermost

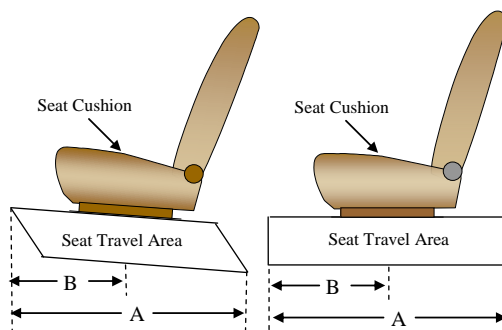



## DATA SHEET NO. 2 - SEAT ADJUSTMENT, FUEL SYSTEM AND STEERING WHEEL DATA (CONT'D)

Test Vehicle: 2020 Cadillac XT5 SUV  
Test Program: NCAP Frontal Impact


NHTSA No.: M20200106  
Test Date: 12/12/2019

### FUEL TANK CAPACITY

	Liters
Usable Capacity of "Standard Tank"	82.1
Usable Capacity of "Optional Tank"	N/A
92%-94% of Usable Capacity	76.4
Actual Amount of Solvent Used	76.4
1/3 of Usable Capacity	27.4

Describe the fuel system - what type of fuel pump, details about how it operates, etc.


Pump will run for about 3 seconds when the key is turned on and then will not run unless the engine is cranking or running

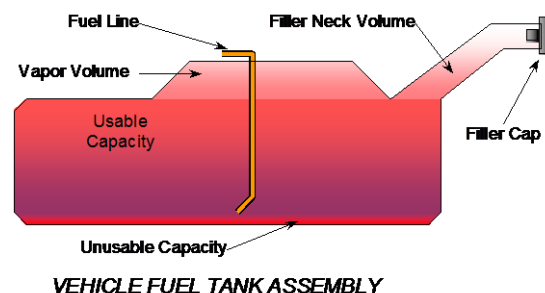

### STEERING COLUMN ADJUSTMENT

Steering wheel and column adjustments are made so that the steering wheel hub is at the geometric center of the locus it describes when moved through its full range of motion. Describe how this measurement was taken.

Steel square was placed across the rim of the steering wheel, an inclinometer was placed on plate and the angle was measured. Telescope travel was measured full in and full out and set at the midpoint.

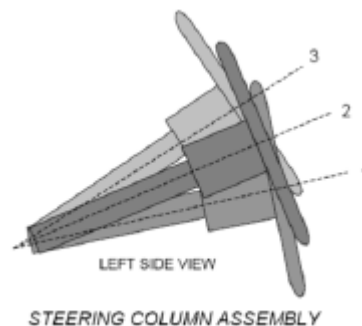


### STEERING COLUMN POSITIONS

	Degrees	Fore/Aft Position (mm)
Lowermost Position No. 1	20.8	0
Geometric Center Position No. 2	22.3	23
Uppermost Position No. 3	25.2	46
Telescoping Steering Wheel Travel		46
Test Position	22.3	23

### DATA SHEET NO. 3 - DUMMY LONGITUDINAL CLEARANCE DIMENSIONS

Test Vehicle: 2020 Cadillac XT5 SUV  
Test Program: NCAP Frontal Impact

NHTSA No.: M20200106  
Test Date: 12/12/2019

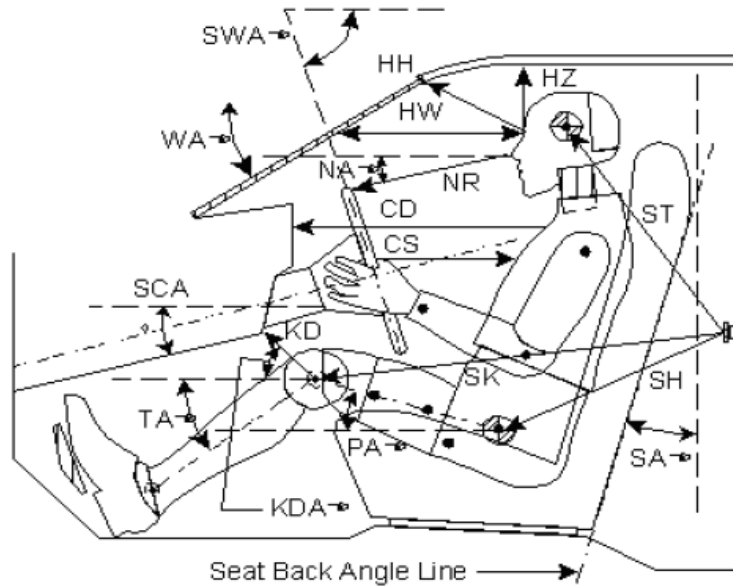

Code	Measurement Description	Driver		Passenger	
		Length (mm)	Angle (°)	Length (mm)	Angle (°)
WA°	Windshield Angle		26.2		
SWA°	Steering Wheel Angle		67.7		
SCA°	Steering Column Angle		22.3		
SA°	Seat Back Angle (on head rest post)		-16.2		-17.6
HZ	Head to Roof (Z)	220		238	
HH	Head to Header	437		382	
HW	Head to Windshield	773		774	
NR	Nose to Rim	427	7.8		
CD	Chest to Dash	575		395	
CS	Chest to Steering Hub	359			
RA	Rim to Abdomen	233			
KDL	Left Knee to Dash	205	36.0	125	41.7
KDR	Right Knee to Dash	171	38.9	146	42.3
PA°	Pelvic Angle		23.6		20.4
TA°	Tibia Angle		48.7		54.3
SK	Striker to Knee	557	2.0	635	4.1
ST	Striker to Head	554	-81.8	499	-69.0
SH	Striker to H-Point	237	30.8	326	15.1


#### DATA SHEET NO. 4 - DUMMY LATERAL CLEARANCE DIMENSIONS

Test Vehicle: 2020 Cadillac XT5 SUV

NHTSA No.: M20200106

Test Program: NCAP Frontal Impact

Test Date: 12/12/2019

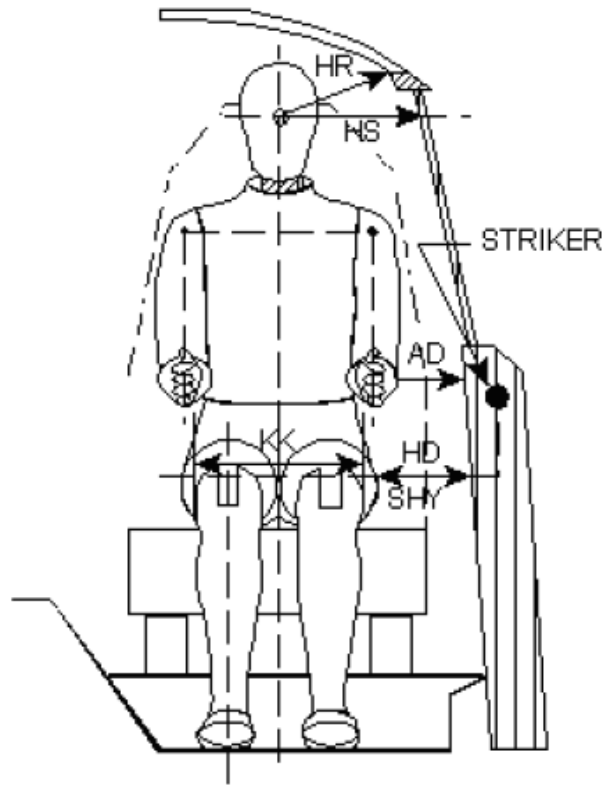


Code	Measurement Description	Driver	Passenger
AD	Arm to Door	134	97
HD	H-Point to Door	179	181
HR	Head to Side Header	236	272
HS	Head to Side Window	366	400
KK	Knee to Knee	210	170
SHY	Striker to H-Point (Y Direction)	250	273
AA	Ankle to Ankle	320	190

## DATA SHEET NO. 5 - SEAT BELT POSITIONING DATA

Test Vehicle: 2020 Cadillac XT5 SUV  
 Test Program: NCAP Frontal Impact

NHTSA No.: M20200106  
 Test Date: 12/12/2019

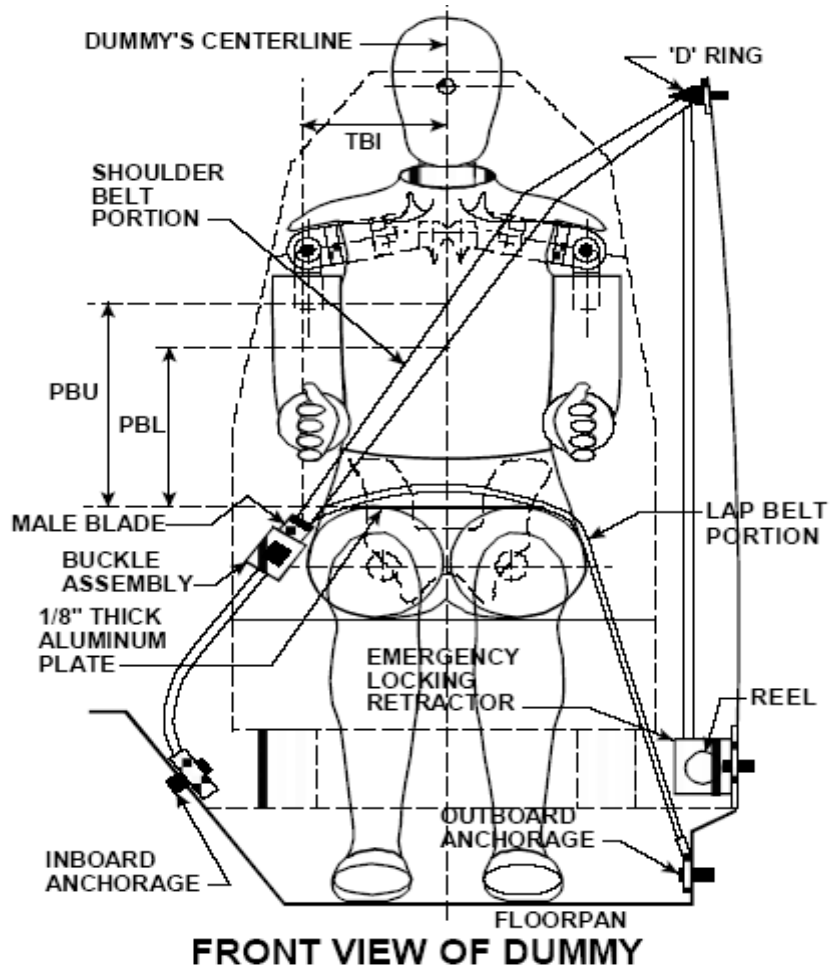

### SEAT BELT POSITIONING MEASUREMENTS

Measurement Description	Units	Driver	Passenger
<b>PBU</b> – Top surface of reference to belt upper edge	mm	343	267
<b>PBL</b> – Top surface of reference to belt lower edge	mm	260	182

### BELT LENGTH DATA


Measurement Description	Units	Driver	Passenger
Shoulder belt length as measured on ATD	mm	831	898
Lap belt length as measured on ATD	mm	425	455
Remainder of belt on reel	mm	1028	1197
Total belt length for continuous webbing systems	mm	2284	2277

## DATA SHEET NO. 6 - HIGH SPEED CAMERA LOCATIONS AND DATA

Test Vehicle: 2020 Cadillac XT5 SUV  
Test Program: NCAP Frontal Impact

NHTSA No.: M20200106  
Test Date: 12/12/2019

### CAMERA POSITIONS FOR FRONTAL IMPACTS

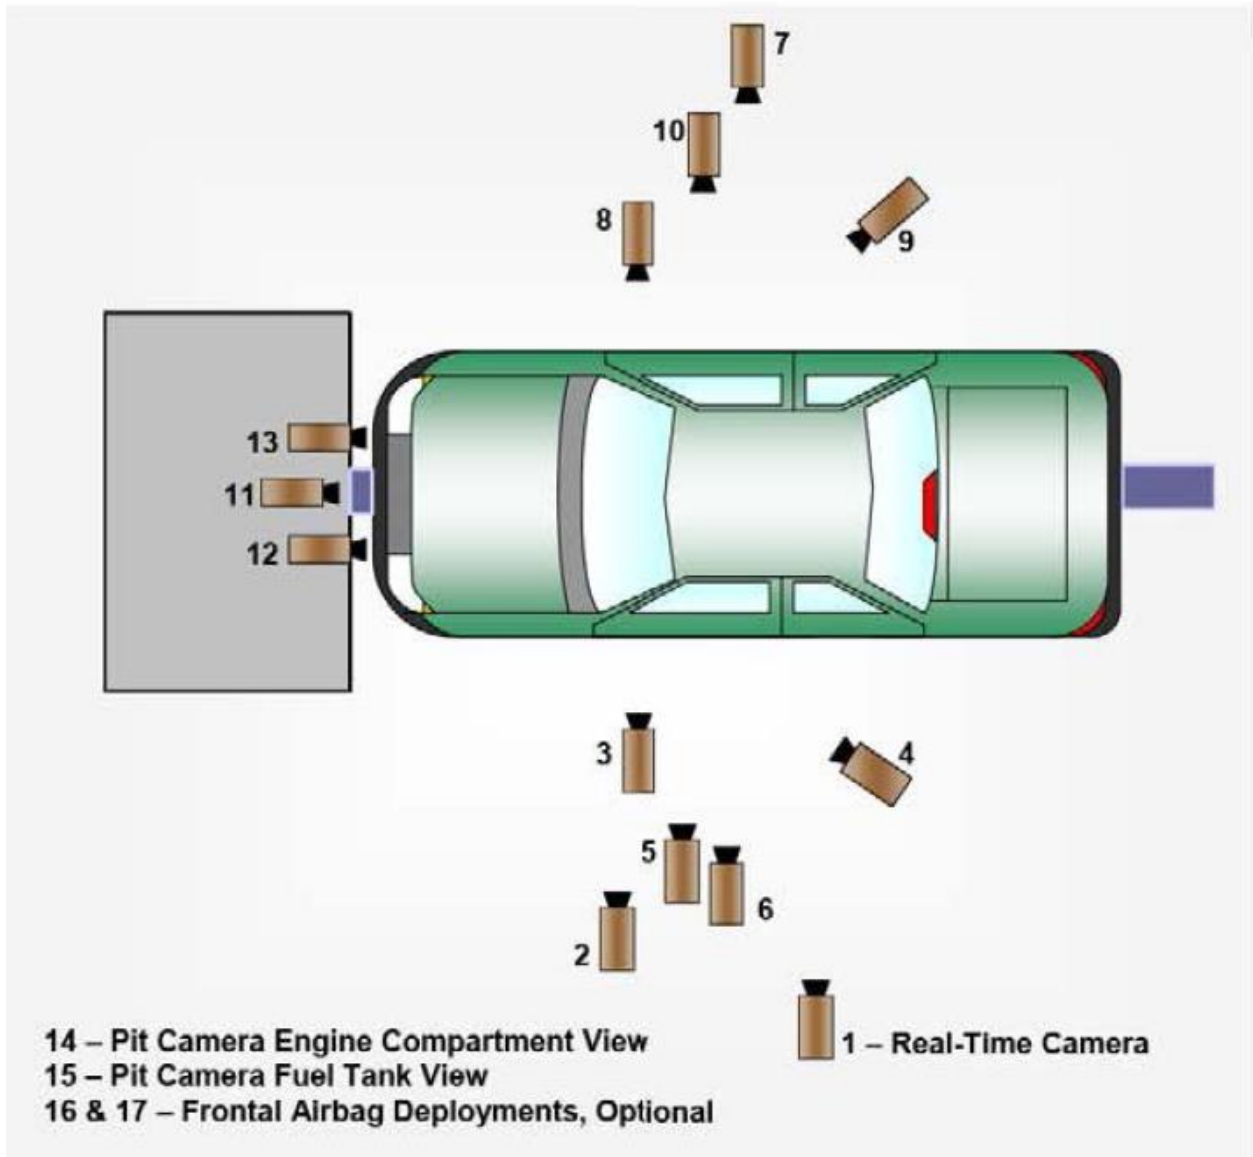

**DATA SHEET NO. 6 - HIGH SPEED CAMERA LOCATIONS AND DATA  
(CONT'D)**

Test Vehicle: 2020 Cadillac XT5 SUV  
Test Program: NCAP Frontal Impact

NHTSA No.: M20200106  
Test Date: 12/12/2019

**CAMERA LOCATIONS**


No.	Camera View	Location (mm)			Lens (mm)	Frame Speed (fps)
		X	Y	Z		
1	REAL-TIME LEFT OVERALL	-1497	-5269	-1577	Zoom	30
2	LEFT OVERALL	-2717	-5462	-1654	20	1000
3	DRIVER CLOSE-UP	-2002	-5121	-1536	50	1000
4	LEFT FRONT HALF	-992	-4938	-1605	28	1000
5	LEFT ANGLE	-3626	-2131	-1963	25	1000
6	STEERING COLUMN	-2229	-5169	-1551	50	1000
7	RIGHT OVERALL	-2709	5213	-1631	20	1000
8	PASSENGER CLOSE-UP	-1566	4149	-1558	50	1000
9	RIGHT FRONT HALF	-767	4548	-1608	28	1000
10	RIGHT ANGLE	-3004	2011	-1892	25	1000
11	WINDSHIELD	0	0	-2588	12.5	1000
12	DRIVER WINDSHIELD	0	-443	-2588	20	1000
13	PASSENGER WINDSHIELD	0	411	-2588	20	1000
14	PIT FRONT	-785	0	3165	18.5	1000
15	PIT REAR	-3067	0	3211	20	1000
16	DRIVER ONBOARD				12.5	1000
17	PASSENGER ONBOARD				12.5	1000

Reference Points: +X – forward of impact plane  
+Y – right of monorail center  
+Z – into ground

## DATA SHEET NO. 7 - VEHICLE ACCELEROMETER DATA

Test Vehicle: 2020 Cadillac XT5 SUV  
 Test Program: NCAP Frontal Impact

NHTSA No.: M20200106  
 Test Date: 12/12/2019

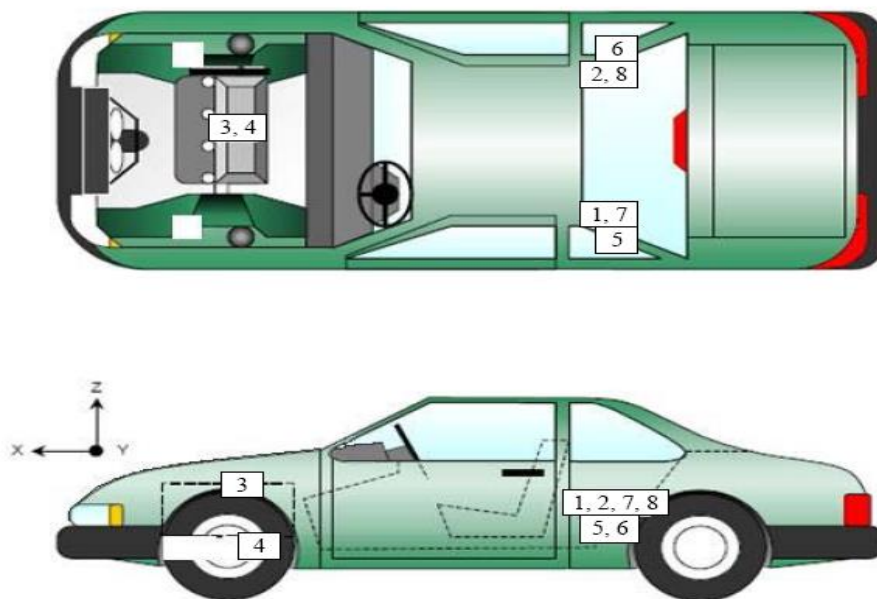

### VEHICLE ACCELEROMETER PRE-TEST LOCATIONS

No.	Accelerometer Location	Measurements (mm)		
		X	Y	Z
1	Left Rear Accelerometer – X Direction	1750	-635	-473
2	Right Rear Accelerometer – X Direction	1750	635	-477
3	Engine Top X	4225	-70	-806
4	Engine Bottom X	3935	50	-352
5	Left Rear Accelerometer – Z Direction	1750	-635	-476
6	Right Rear Accelerometer – Z Direction	1750	635	-480
7	Left Rear Accelerometer – X Direction Redundant	1725	-635	-473
8	Right Rear Accelerometer- X Direction Redundant	1725	635	-477

Reference Points: X – Rear Surface of Vehicle (+ forward)  
 Y – Vehicle Centerline (+ to right)  
 Z – Ground Plane (+ down)

## DATA SHEET NO. 8 - PHOTOGRAPHIC REFERENCE TARGET LOCATIONS

Test Vehicle: 2020 Cadillac XT5 SUV




NHTSA No.: M20200106

Test Program: NCAP Frontal Impact

Test Date: 12/12/2019

Item	Value
A	395
B	950
C	2400
D	610
E	1815
F	310
G	1782
H	1442
I	1512
J	907
K	936
L	1460
M	1450
N	1460
O	940
P	906
Q	1509

All units in millimeters

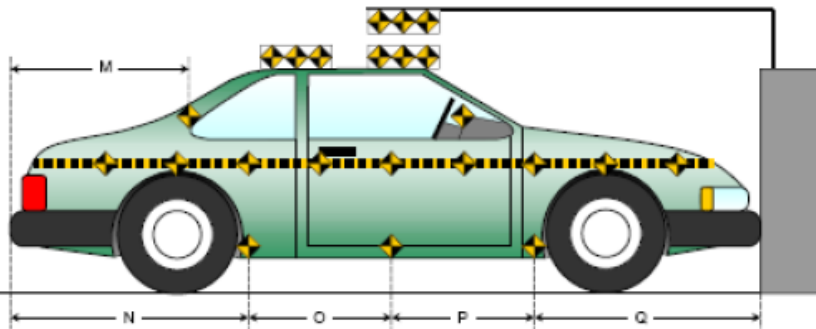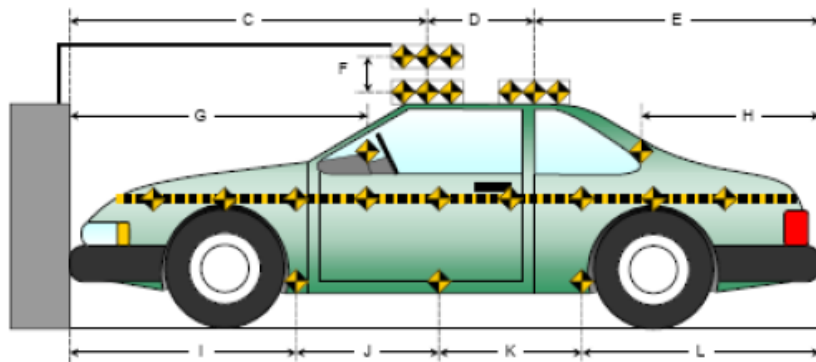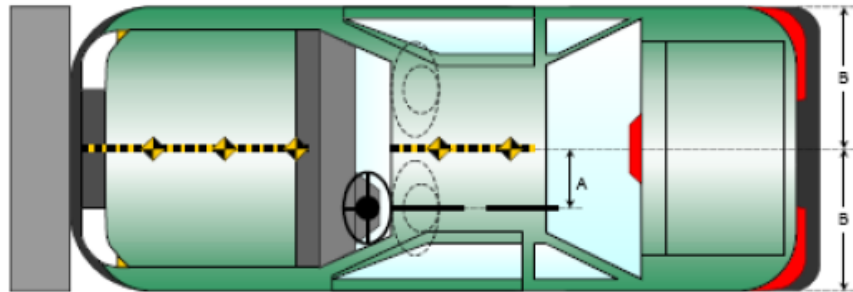




## DATA SHEET NO. 9 - LOAD CELL LOCATIONS ON FIXED BARRIER

Test Vehicle: 2020 Cadillac XT5 SUV  
 Test Program: NCAP Frontal Impact

NHTSA No.: M20200106  
 Test Date: 12/12/2019

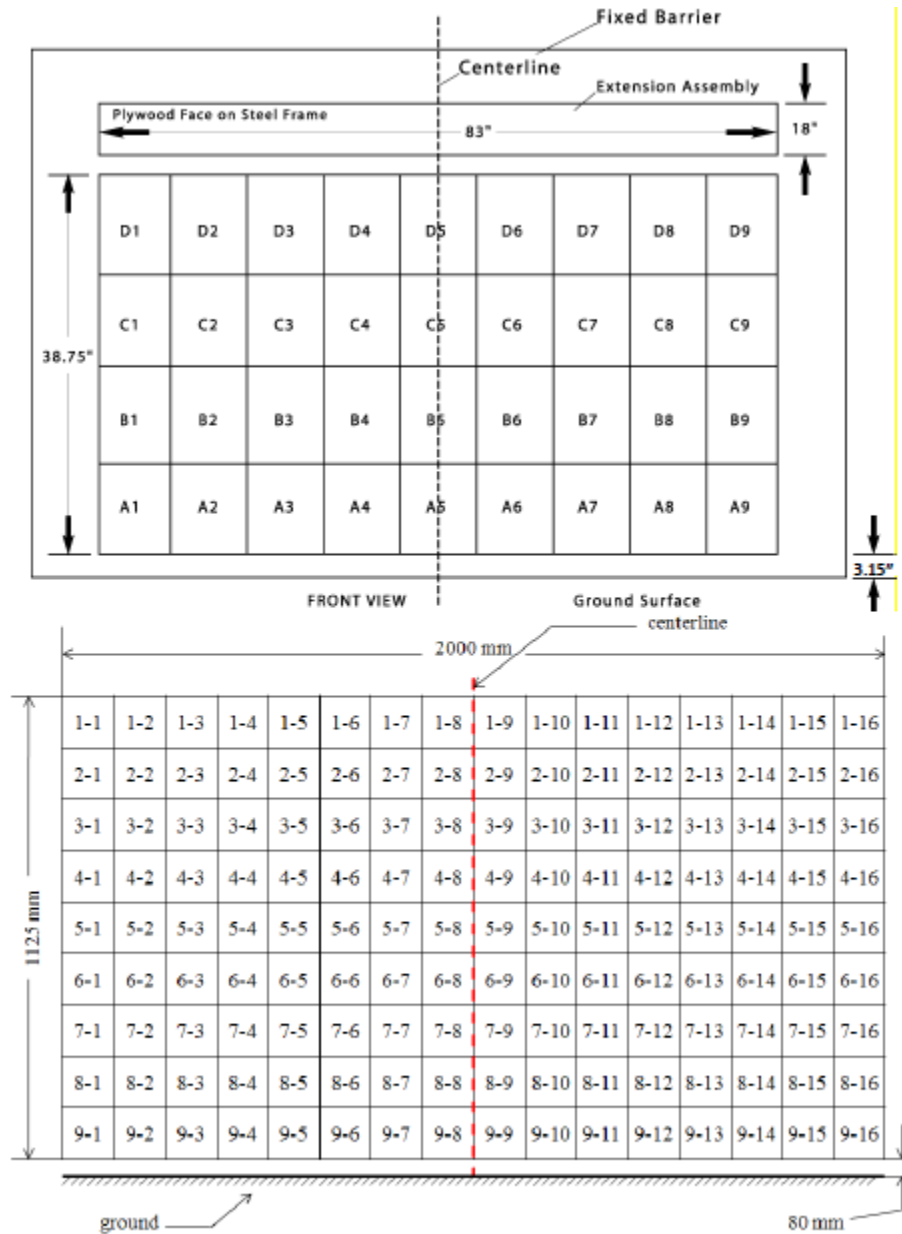

## DATA SHEET NO. 10 - TEST VEHICLE SUMMARY OF RESULTS

Test Vehicle: 2020 Cadillac XT5 SUV

NHTSA No.: M20200106

Test Program: NCAP Frontal Impact

Test Date: 12/12/2019

### INSTRUMENTATION

Instrumentation	Number of Channels Collected
Driver Dummy Accelerometers	47
Passenger Dummy Accelerometers	47
Vehicle Structure Accelerometers	8
<b>Total</b>	102

### CAMERA COVERAGE

Type of Camera	Number Used in this Test
High-Speed Vehicle Onboard	2
High-Speed Offboard	14
Real-Time Panning	2
<b>Total</b>	18

**DATA SHEET NO. 11 - POST-TEST OBSERVATIONS**Test Vehicle: 2020 Cadillac XT5 SUVNHTSA No.: M20200106Test Program: NCAP Frontal ImpactTest Date: 12/12/2019**TEST DUMMY INFORMATION AND CONTACT LOCATIONS**

Description	Driver	Passenger
Dummy Type / Serial No.	Hybrid III 50th / 037	Hybrid III 5th / EB7513
Head Contact	Frontal Airbag and Head Restraint	Frontal Airbag and Head Restraint
Upper Torso Contact	Airbag	Airbag
Lower Torso Contact	None	None
Left Knee Contact	Knee Airbag	Glove Box
Right Knee Contact	Knee Airbag	Glove Box

**DOOR OPENING, TRUNK OPENING, AND SEAT TRACK INFORMATION**

Description	Driver	Passenger	Other
Locked/Unlocked Doors	Unlocked	Unlocked	
Front Door Opening	No	No	
Rear Door Opening	No	No	
Trunk/Hatch/Tailgate Opening			No
Seat Track Shift (mm)	No	No	
Seat Back Movement from Initial Position	No	No	

**POST- OTHER VEHICLE POST-TEST OBSERVATIONS**

Critical Areas of Performance	Observations
Windshield Damage	None
Window Damage	None
Other Notable Effects	Left & right front tires flat

**VEHICLE REBOUND FROM BARRIER**

Measured Parameter	Units	Value
Left Side	mm	608
Center	mm	508
Right Side	mm	685
Average	mm	600

**SUPPLEMENTAL RESTRAINT SYSTEM INFORMATION**

Restraint Type	Driver (Occupant 1)		Passenger (Occupant 2)	
	Installed	Deployed	Installed	Deployed
Front Airbag	Yes	Yes	Yes	Yes
Torso/Pelvis Side Airbag	Yes	No	Yes	No
Curtain Side Airbag	Yes	Yes	Yes	Yes
Knee Airbag	Yes	Yes	No	N/A
Seat Belt Pretensioner	Yes	Yes	Yes	Yes
Seat Belt Load Limiter	Yes	Yes	Yes	Yes
Seat Belt Buckle Pretensioner	No	N/A	No	N/A
Other	No	N/A	No	N/A


## DATA SHEET NO. 12 - VEHICLE PROFILE MEASUREMENTS

Test Vehicle: 2020 Cadillac XT5 SUV

NHTSA No.: M20200106

Test Program: NCAP Frontal Impact

Test Date: 12/12/2019

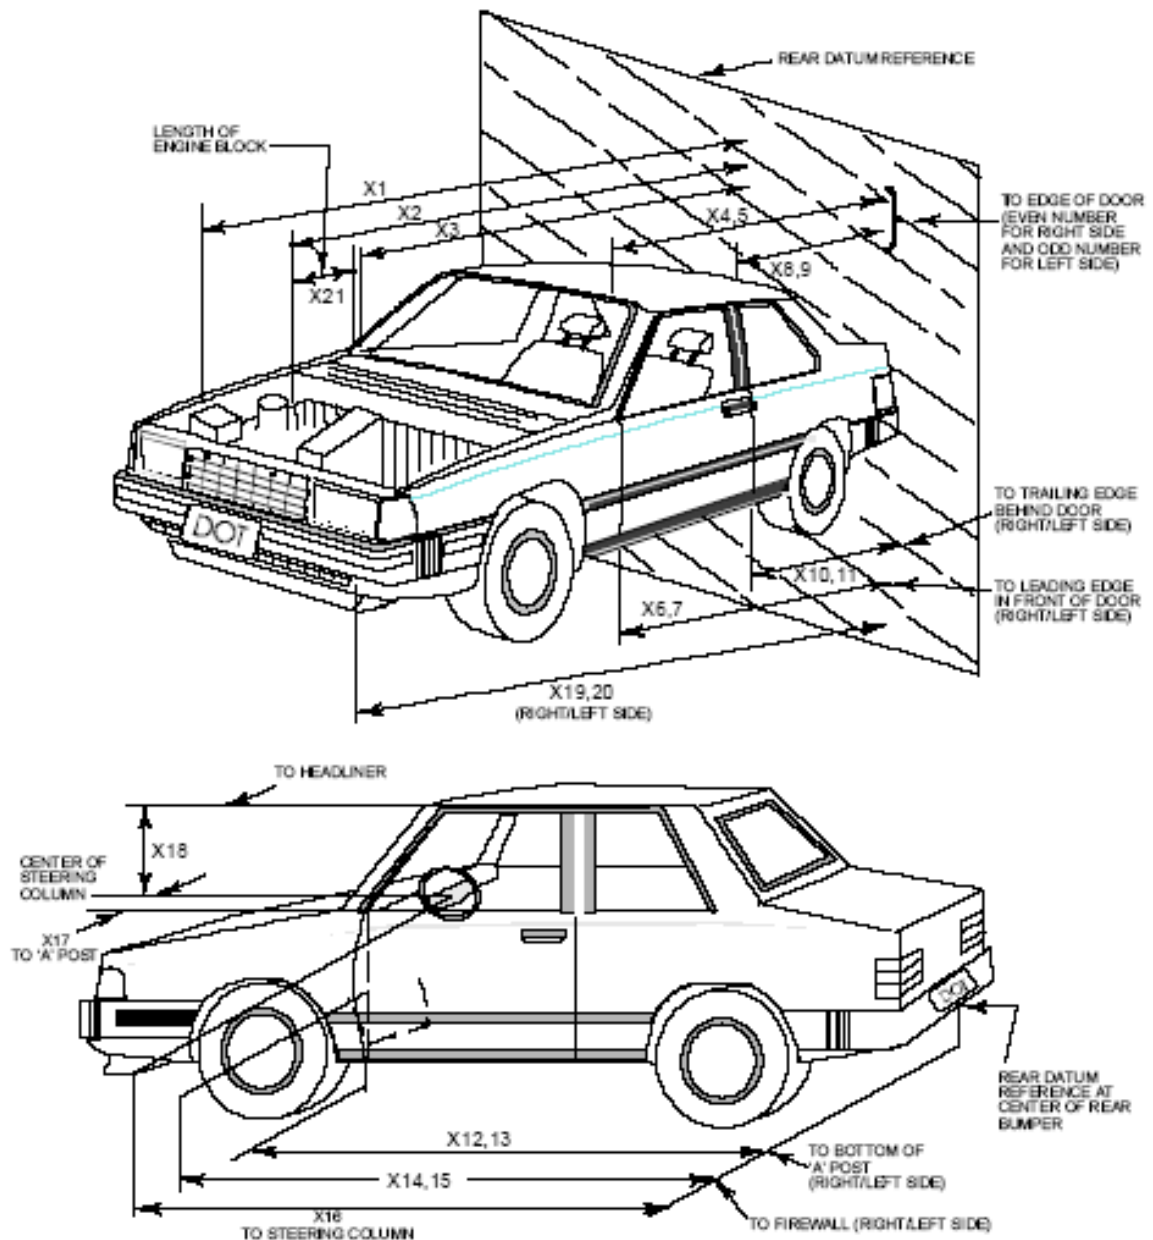

**DATA SHEET NO. 12 - VEHICLE PROFILE MEASUREMENTS (CONT'D)**Test Vehicle: 2020 Cadillac XT5 SUVNHTSA No.: M20200106Test Program: NCAP Frontal ImpactTest Date: 12/12/2019

No.	Measurement Description	Pre-Test	Post-Test	Difference
1	Total Length of Vehicle at Centerline	4815	4390	425
2	Rear Surface of Vehicle (RSOV) to Front of Engine	4219	3955	264
3	RSOV to Firewall	3755	3758	-3
4	RSOV to Upper Leading Edge of Right Door	3290	3291	-1
5	RSOV to Upper Leading Edge of Left Door	3290	3290	0
6	RSOV to Lower Leading Edge of Right Door	3262	3260	2
7	RSOV to Lower Leading Edge of Left Door	3260	3259	1
8	RSOV to Upper Trailing Edge of Right Door	2230	2230	0
9	RSOV to Upper Trailing Edge of Left Door	2229	2228	1
10	RSOV to Lower Trailing Edge of Right Door	2250	2246	4
11	RSOV to Lower Trailing Edge of Left Door	2242	2244	-2
12	RSOV to Bottom of "A" Post-of Right Side	3245	3245	0
13	RSOV to Bottom of "A" Post-of Left Side	3250	3249	1
14	RSOV to Firewall, Right Side	3868	3867	1
15	RSOV to Firewall, Left Side	3857	3857	0
16	RSOV to Steering Column	2844	2940	-96
17	Center of Steering Column to "A" Post	302	316	-14
18	Center of Steering Column to Headliner	440	470	-30
19	RSOV to Right Side of Front Bumper	4569	4250	319
20	RSOV to Left Side of Front Bumper	4560	4226	334
21	Length of Engine Block	500	500	0
RD	RSOV to Right Side of Dash Panel	3052	3050	2
CD	RSOV to Center of Dash Panel	3063	3063	0
LD	RSOV to Left Side of Dash Panel	3052	3054	-2

All Dimensions in mm

## DATA SHEET NO. 13 - ACCIDENT INVESTIGATION DIVISION DATA

Test Vehicle: 2020 Cadillac XT5 SUV  
Test Program: NCAP Frontal Impact

NHTSA No.: M20200106  
Test Date: 12/12/2019

### VEHICLE INFORMATION

VIN: 1GYKNDRS7LZ121480  
Vehicle Size Category: SUV


Wheelbase: 2860  
Test Weight (kg): 2226.4

### ACCELEROMETER DATA

Accelerometer Locations: As listed on Page 15 of this report.  
Cal. Procedure/Interval: TRC procedure / 6 month interval  
Integration Algorithm: Trapezoidal  
Linearity: > 99%  
Impact Velocity (km/h): 56.55  
Velocity Change (km/h): 65.87  
Time of Separation (ms): 138

### CRUSH PROFILE

Collision Deformation Classification: 12FDEW2  
Midpoint of Damage: Centerline  
Damage Region Length (mm): 1524  
Impact Mode: Frontal

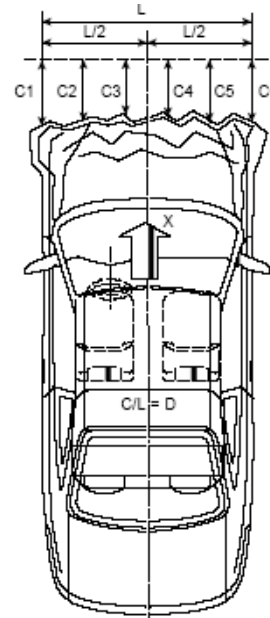

No.	Measurement Description	Units	Pre-Test	Post-Test	Difference
C1	Crush zone 1 at left side	mm	4560	4250	310
C2	Crush zone 2 at left side	mm	4735	4330	405
C3	Crush zone 3 at left side	mm	4785	4374	411
C4	Crush zone 4 at right side	mm	4785	4365	420
C5	Crush zone 5 at right side	mm	4745	4304	441
C6	Crush zone 6 at right side	mm	4569	4226	343
L	C1 to C6	mm	1524	1490	34

## DATA SHEET NO. 14 - VEHICLE INTRUSION MEASUREMENTS

Test Vehicle: 2020 Cadillac XT5 SUV  
Test Program: NCAP Frontal Impact


NHTSA No.: M20200106  
Test Date: 12/12/2019

### DOOR OPENING WIDTH

No.	Description	Units	Pre-Test	Post-Test	Difference
A	Left Side Upper	mm	990	990	0
B	Left Side Lower	mm	900	900	0
D	Right Side Upper	mm	990	990	0
E	Right Side Lower	mm	900	900	0

### WHEELBASE MEASUREMENTS

No.	Description	Units	Pre-Test	Post-Test	Difference
C	Left Side Wheelbase	mm	2860	2755	105
F	Right Side Wheelbase	mm	2860	2760	100

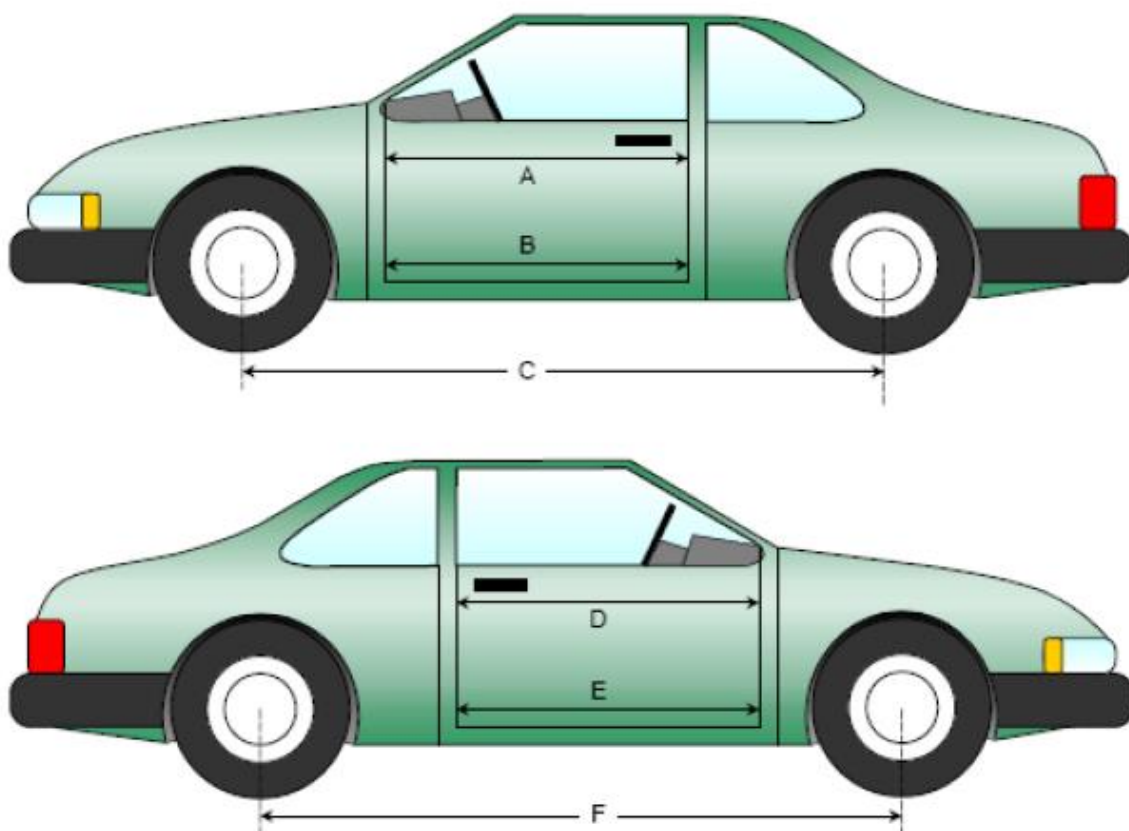

## DATA SHEET NO. 14 - VEHICLE INTRUSION MEASUREMENTS (CONT'D)

Test Vehicle: 2020 Cadillac XT5 SUV

NHTSA No.: M20200106


Test Program: NCAP Frontal Impact

Test Date: 12/12/2019

### DRIVER COMPARTMENT INTRUSION

Item	Description	Units	Pre-Test	Post-Test	Difference
AB	Door Opening (Inside Window Jam)	mm	1000	998	2
CX	Left Knee Bolster to X	mm	318	317	1
DX	Right Knee Bolster to X	mm	320	321	-1
EX	Brake Pedal to X	mm	580	550	30
FX	Foot Rest to X	mm	615	610	5
GX	Center of Steering Column Wheel Hub to X	mm	93	190	-97

X = Front of Seat Track (Stationary)

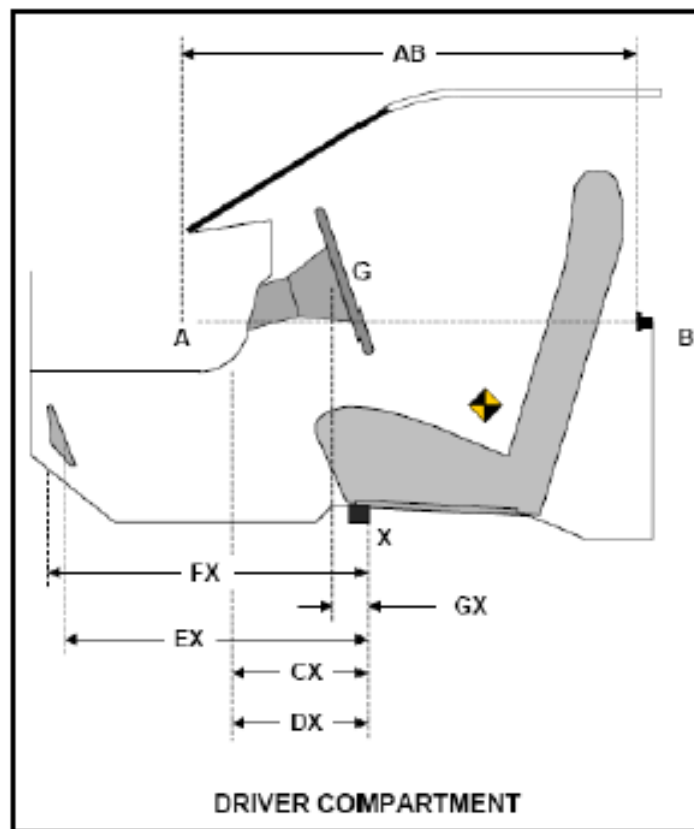



## DATA SHEET NO. 15 - SUMMARY OF INDICANT FMVSS 212 AND FMVSS 219 (PARTIAL) DATA

Test Vehicle: 2020 Cadillac XT5 SUV  
Test Program: NCAP Frontal Impact

NHTSA No.: M20200106  
Test Date: 12/12/2019

Please provide windshield mounting details.


The standard requires that the post-test retention measurement be a minimum of 75% of the pre-test total periphery measurement for vehicle not equipped with occupant passive restraint and 50% for each side of the windshield for vehicle which are equipped with occupant passive restraints.

Temperature of windshield molding during test: 20.8°C

### WINDSHIELD PERIPHERY MEASUREMENTS

Measurement	Pre-Test (mm)	Post-Test (mm)	% Retention
Left Side	2230	2230	100.0
Right Side	2230	2230	100.0
Total	4460	4460	100.0

Item	Units	Value
A	mm	1250
B	mm	455
C	mm	1590
D	mm	810
E	mm	529
F	mm	535

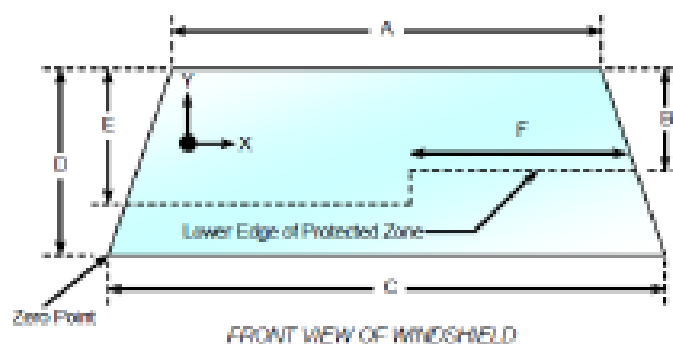

### AREAS OF PROTECTED ZONE FAILURES

A. Provide coordinates of the area that the protected zone was penetrated more than .25 inches by a vehicle component other than one that is normally in contact with the windshield.

X	Y
NA	NA
NA	NA
NA	NA
NA	NA

B. The inner surface of the windshield was penetrated by the hood support beneath the protected zone.

X	Y
NA	NA
NA	NA
NA	NA
NA	NA

**DATA SHEET NO. 16 - FMVSS 301 BARRIER IMPACT AND STATIC ROLLOVER  
RESULTS**

Test Vehicle: 2020 Cadillac XT5 SUV  
Test Program: NCAP Frontal Impact

NHTSA No.: M20200106  
Test Date: 12/12/2019

**FMVSS 301 FUEL SYSTEM INTEGRITY POST IMPACT DATA**

Temperature at Time of Impact: 21.6°C

Test Time: 16:30

**Stoddard Solvent Spillage Measurements**

- A From impact until vehicle motion ceases: 0 oz.  
(maximum allowable – 1 oz.)
- B For the 5-minute period after motion ceases: 0 oz.  
(maximum allowable – 5 oz.)
- C For the following 25 minutes: 0 oz.  
(maximum allowable – 1 oz./minutes)
- D Spillage: None


## DATA SHEET NO. 16 - FMVSS 301 BARRIER IMPACT AND STATIC ROLLOVER RESULTS (CONT'D)

Test Vehicle: 2020 Cadillac XT5 SUV  
 Test Program: NCAP Frontal Impact

NHTSA No.: M20200106  
 Test Date: 12/12/2019

1. The specified fixture rollover rate for each 90° of rotation is 60 to 180 seconds.
2. The position hold time at each position is 300 seconds (minimum).
3. Details of Stoddard Solvent spillage:

None  
 \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_

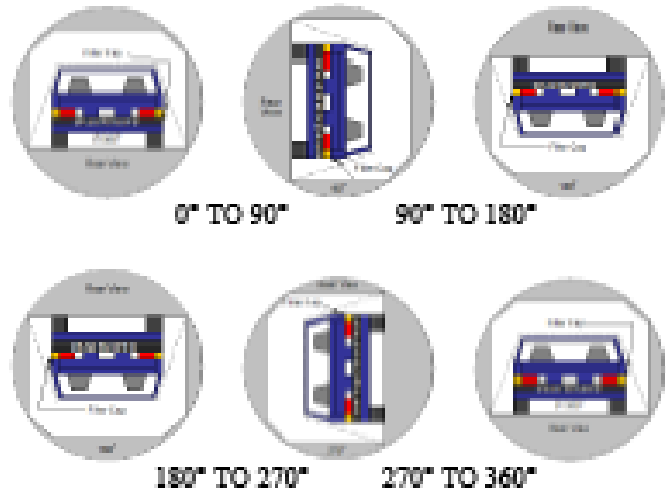

**SOLVENT COLLECTION TIME TABLE IN SECONDS**

Test Phase	Rotation Time	Hold Time	Total Time
0° to 90°	90	330	420
90° to 180°	90	330	840
180° to 270°	90	330	1260
270° to 360°	90	330	1480

**FMVSS 301 SPILLAGE TABLE**

Test Phase	First 5 Minutes	Sixth Minute	Seventh Minute	Eighth Minute
0° to 90°	0	0	0	N/A
90° to 180°	0	0	0	N/A
180° to 270°	0	0	0	N/A
270° to 360°	0	0	0	N/A


**SOLVENT SPILLAGE LOCATION TABLE**

Test Phase	Spillage Location
0° to 90°	None
90° to 180°	None
180° to 270°	None
270° to 360°	None

## DATA SHEET NO. 17 - DUMMY/VEHICLE TEMPERATURE STABILIZATION

Test Vehicle: 2020 Cadillac XT5 SUV  
 Test Program: NCAP Frontal Impact

NHTSA No.: M20200106  
 Test Date: 12/12/2019

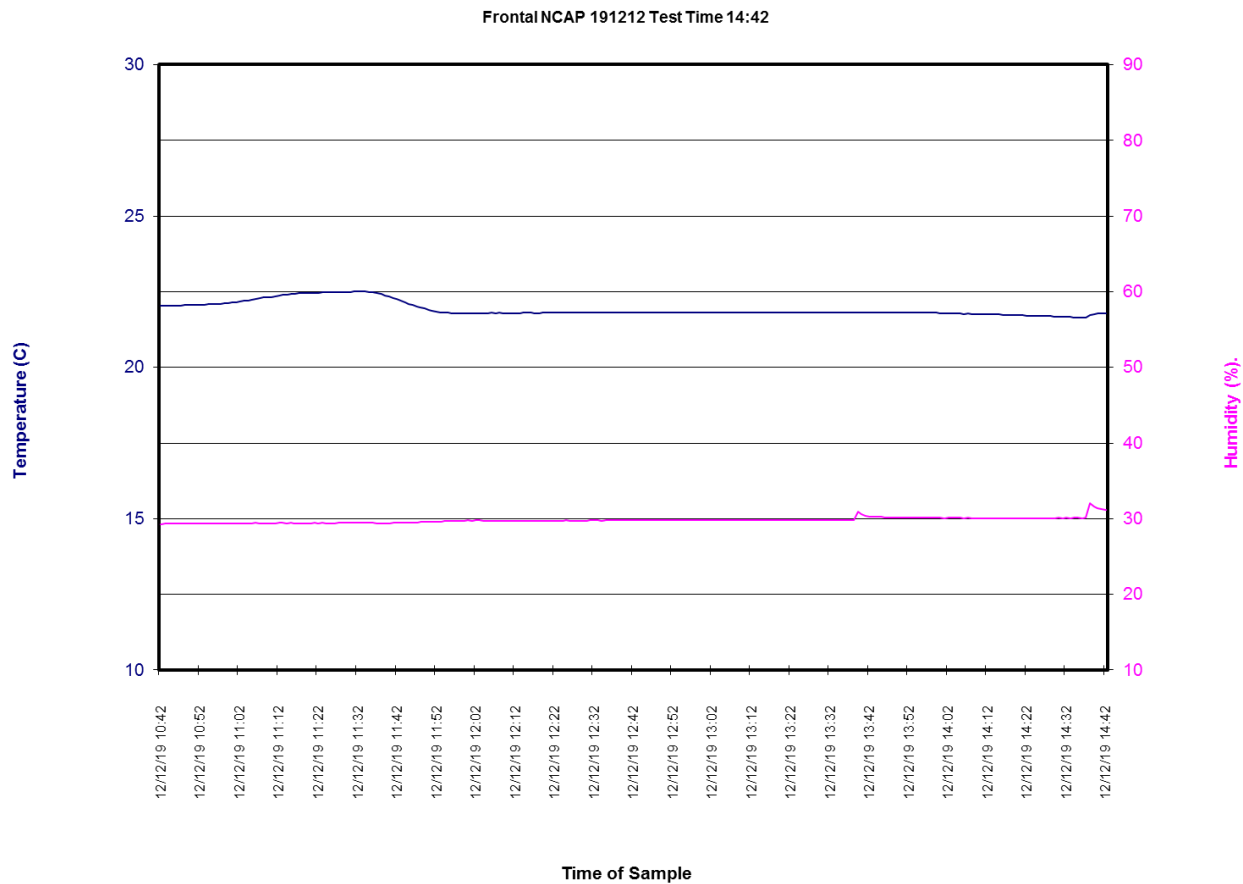

**APPENDIX A**  
**PHOTOGRAPHS**

## TABLE OF PHOTOGRAPHS

No.	Description	Page
<b>1</b>	Load Cell Location	<b>A-5</b>
<b>2</b>	Pre-Test Load Cell Wall	<b>A-5</b>
<b>3</b>	Post-Test Load Cell Wall	<b>A-6</b>
<b>4</b>	Manufacturer's Label	<b>A-6</b>
<b>5</b>	Tire Placard	<b>A-7</b>
<b>6</b>	2020 Cadillac XT5 SUV Frontal As Delivered	<b>A-8</b>
<b>7</b>	Right Rear 3-4 View, as Received	<b>A-8</b>
<b>8</b>	Pre-Test Front View of Test Vehicle	<b>A-9</b>
<b>9</b>	Post-Test Front View of Test Vehicle	<b>A-9</b>
<b>10</b>	Pre-Test Left View of Test Vehicle	<b>A-10</b>
<b>11</b>	Post-Test Left View of Test Vehicle	<b>A-10</b>
<b>12</b>	Pre-Test Right View of Test Vehicle	<b>A-11</b>
<b>13</b>	Post-Test Right View of Test Vehicle	<b>A-11</b>
<b>14</b>	Pre-Test Right Front 3-4 View	<b>A-12</b>
<b>15</b>	Post-Test Right Front 3-4 View	<b>A-12</b>
<b>16</b>	Pre-Test Left Rear 3-4 View	<b>A-13</b>
<b>17</b>	Post-Test Left Rear 3-4 View	<b>A-13</b>
<b>18</b>	Pre-Test Windshield View	<b>A-14</b>
<b>19</b>	Post-Test Windshield View	<b>A-14</b>
<b>20</b>	Pre-Test Engine Compartment View	<b>A-15</b>
<b>21</b>	Post-Test Engine Compartment View	<b>A-15</b>
<b>22</b>	Pre-Test Fuel Filler Cap View	<b>A-16</b>
<b>23</b>	Post-Test Fuel Filler Cap View	<b>A-16</b>
<b>24</b>	Pre-Test Front Underbody View	<b>A-17</b>
<b>25</b>	Post-Test Front Underbody View	<b>A-17</b>
<b>25a</b>	Pre-Test Mid Front Underbody View	<b>A-18</b>
<b>25b</b>	Post-Test Mid Front Underbody View	<b>A-18</b>
<b>25c</b>	Pre-Test Mid Rear Underbody View	<b>A-19</b>
<b>25d</b>	Post-Test Mid Rear Underbody View	<b>A-19</b>
<b>26</b>	Pre-Test Rear Underbody View	<b>A-20</b>
<b>27</b>	Post-Test Rear Underbody View	<b>A-20</b>
<b>28</b>	Pre-Test Dummy Cable Routing	<b>A-21</b>
<b>29</b>	Post-Test Dummy Cable Routing	<b>A-21</b>
<b>30</b>	Pre-Test Driver Dummy Front View	<b>A-22</b>
<b>31</b>	Post-Test Driver Dummy Front View	<b>A-22</b>
<b>32</b>	Pre-Test Driver Dummy Window View	<b>A-23</b>
<b>33</b>	Post-Test Driver Dummy Window View	<b>A-23</b>


## **TABLE OF PHOTOGRAPHS (CONTINUED)**

<b>No.</b>	<b>Description</b>	<b>Page</b>
<b>34</b>	Pre-Test Driver Dummy and Vehicle Interior View	<b>A-24</b>
<b>35</b>	Post-Test Driver Dummy and Vehicle Interior View	<b>A-24</b>
<b>36</b>	Pre-Test Driver's Seat Fore-Aft Markings	<b>A-25</b>
<b>37</b>	Post-Test Driver's Seat Fore-Aft Markings	<b>A-25</b>
<b>38</b>	Pre-Test View of Belt Anchorage for Driver Dummy	<b>A-26</b>
<b>39</b>	Post-Test View of Belt Anchorage for Driver Dummy	<b>A-26</b>
<b>40</b>	Pre-Test View of Belt Buckle and Latch Plate for Driver Dummy	<b>A-27</b>
<b>41</b>	Post-Test View of Belt Buckle and Latch Plate for Driver Dummy	<b>A-27</b>
<b>42</b>	Pre-Test Driver Dummy Feet	<b>A-28</b>
<b>43</b>	Post-Test Driver Dummy Feet	<b>A-28</b>
<b>44</b>	Pre-Test Driver's Side Knee Bolster	<b>A-29</b>
<b>45</b>	Post-Test Driver's Side Knee Bolster	<b>A-29</b>
<b>46</b>	Pre-Test Driver's Side Floorpan	<b>A-30</b>
<b>47</b>	Post-Test Driver's Side Floorpan	<b>A-30</b>
<b>48</b>	Post-Test Driver Dummy Face	<b>A-31</b>
<b>49</b>	Post-Test Driver Dummy Contact with Airbag	<b>A-31</b>
<b>50</b>	Post-Test Driver Dummy Contact with Headrest	<b>A-32</b>
<b>51</b>	Pre-Test View of the Steering Wheel	<b>A-33</b>
<b>52</b>	Post-Test View of the Steering Wheel	<b>A-33</b>
<b>53</b>	Pre-Test Passenger Dummy Front View	<b>A-34</b>
<b>54</b>	Post-Test Passenger Dummy Front View	<b>A-34</b>
<b>55</b>	Pre-Test Passenger Dummy Window View	<b>A-35</b>
<b>56</b>	Post-Test Passenger Dummy Window View	<b>A-35</b>
<b>57</b>	Pre-Test Passenger Dummy and Vehicle Interior View	<b>A-36</b>
<b>58</b>	Post-Test Passenger Dummy and Vehicle Interior View	<b>A-36</b>
<b>59</b>	Pre-Test Passenger Seat Fore-Aft Markings	<b>A-37</b>
<b>60</b>	Post-Test Passenger Seat Fore-Aft Markings	<b>A-37</b>
<b>61</b>	Pre-Test View of Belt Anchorage for Passenger Dummy	<b>A-38</b>
<b>62</b>	Post-Test View of Belt Anchorage for Passenger Dummy	<b>A-38</b>
<b>63</b>	Pre-Test View of Belt Buckle and Latch Plate for Passenger Dummy	<b>A-39</b>
<b>64</b>	Post-Test View of Belt Buckle and Latch Plate for Passenger Dummy	<b>A-39</b>
<b>65</b>	Pre-Test Passenger Dummy Feet	<b>A-40</b>
<b>66</b>	Post-Test Passenger Dummy Feet	<b>A-40</b>
<b>67</b>	Pre-Test Passenger Side Knee Bolster	<b>A-41</b>
<b>68</b>	Post-Test Passenger Side Knee Bolster	<b>A-41</b>

## **TABLE OF PHOTOGRAPHS (CONTINUED)**

<b>No.</b>	<b>Description</b>	<b>Page</b>
<b>69</b>	Pre-Test Passenger Side Floorpan	<b>A-42</b>
<b>70</b>	Post-Test Passenger Side Floorpan	<b>A-42</b>
<b>71</b>	Post-Test Passenger Dummy Face	<b>A-43</b>
<b>72</b>	Post-Test Passenger Dummy Contact with Airbag	<b>A-43</b>
<b>73</b>	Post-Test Passenger Dummy Contact with Headrest	<b>A-44</b>
<b>74</b>	Photograph of Ballast Installed in Vehicle View	<b>A-44</b>
<b>75</b>	Post-Test Stoddard Solvent Spillage Location View, if required	<b>A-45</b>
<b>76</b>	Post-Test Speed Trap Read-out	<b>A-45</b>
<b>77</b>	Vehicle at 0° on Static Rollover Device	<b>A-46</b>
<b>78</b>	Vehicle at 90° on Static Rollover Device	<b>A-46</b>
<b>79</b>	Vehicle at 180° on Static Rollover Device	<b>A-47</b>
<b>80</b>	Vehicle at 270° on Static Rollover Device	<b>A-47</b>
<b>81</b>	Vehicle at 360° on Static Rollover Device	<b>A-48</b>
<b>82</b>	2020 Cadillac XT5 SUV Frontal Impact Event	<b>A-48</b>
<b>83</b>	Monroney Label Photograph	<b>A-49</b>




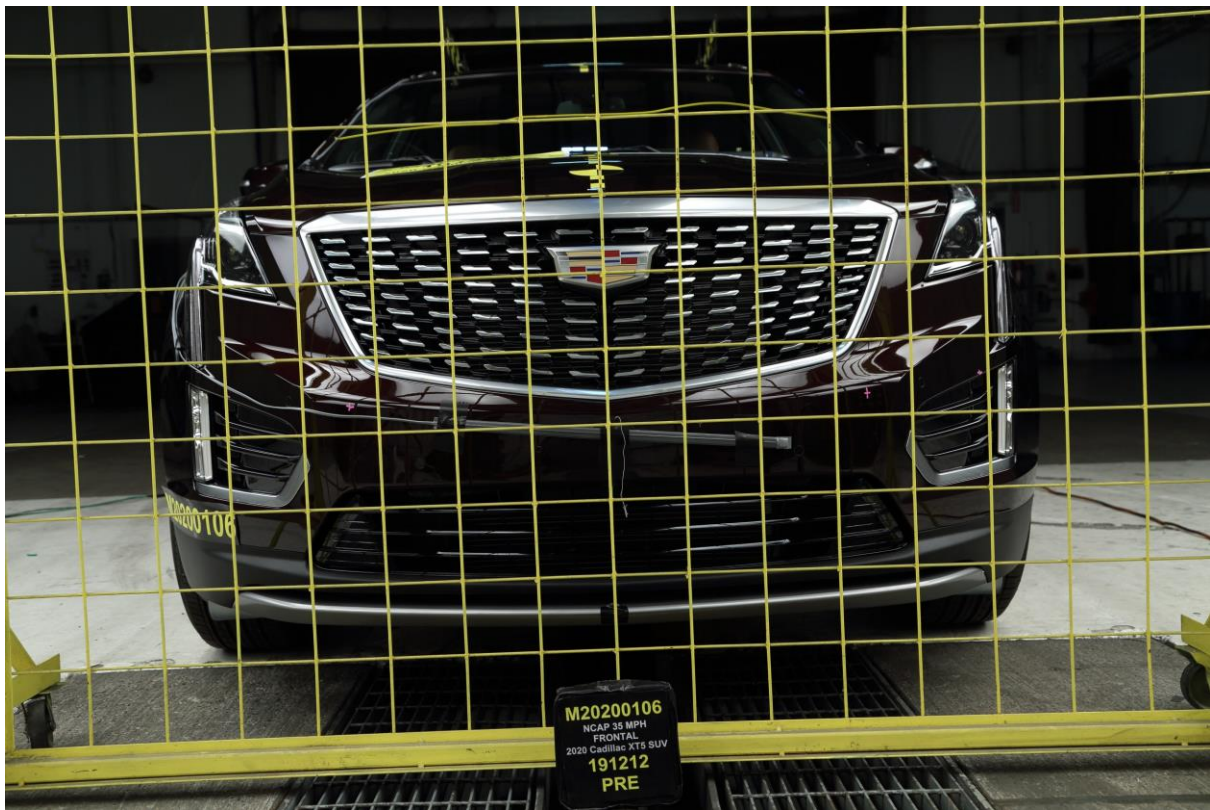

**001 Load Cell Location**



**002 Pre-Test Load Cell Wall**

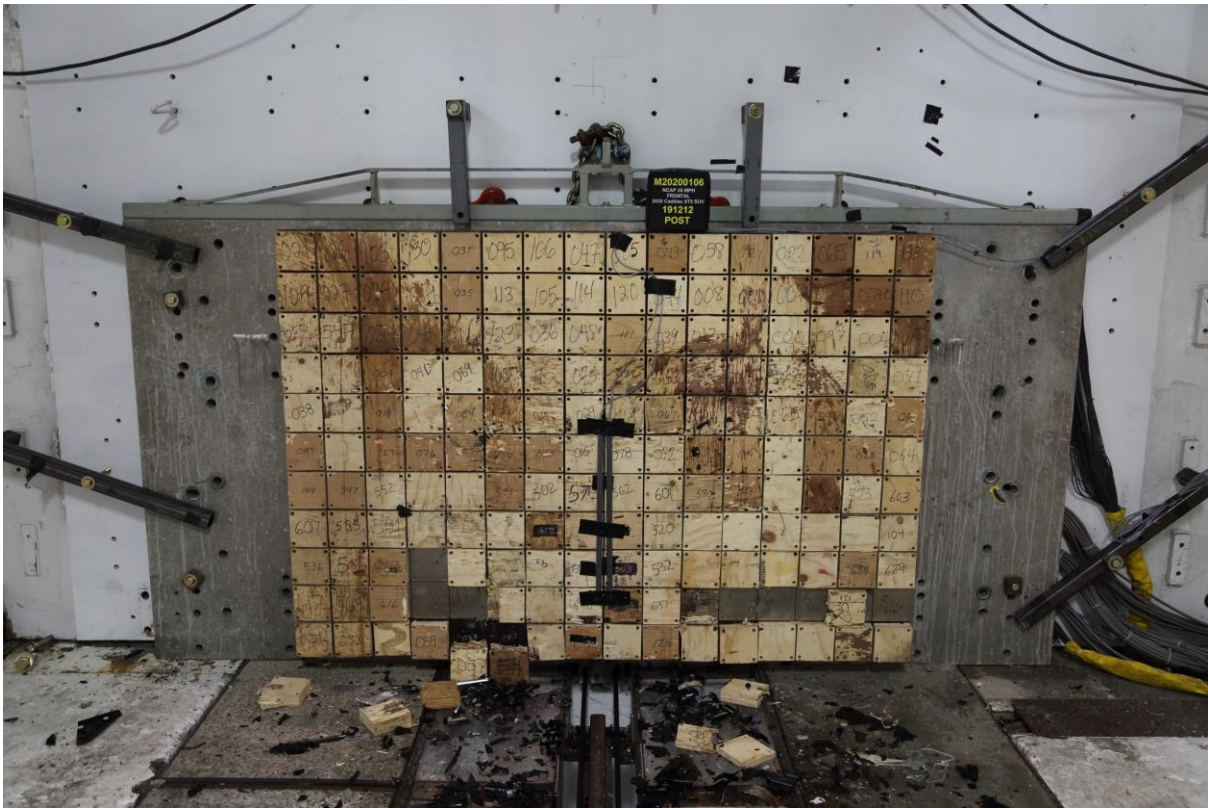

**003 Post-Test Load Cell Wall**



**004 Manufacturer's Label**





**005 Tire Placard**

**Intentionally Left Blank**




**006 2020 Cadillac XT5 SUV Frontal As Delivered**




**007 Left Rear 3-4 View, as Received**



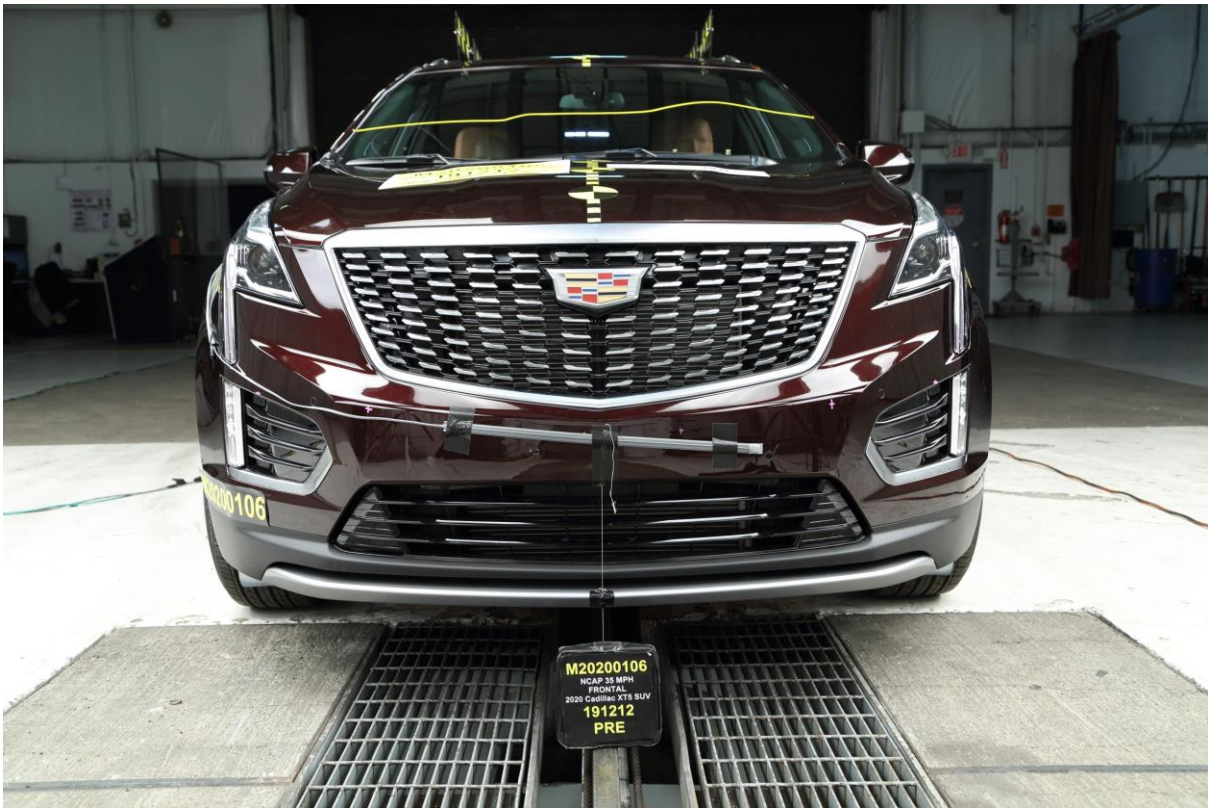


**008 Pre-Test Front View of Test Vehicle**

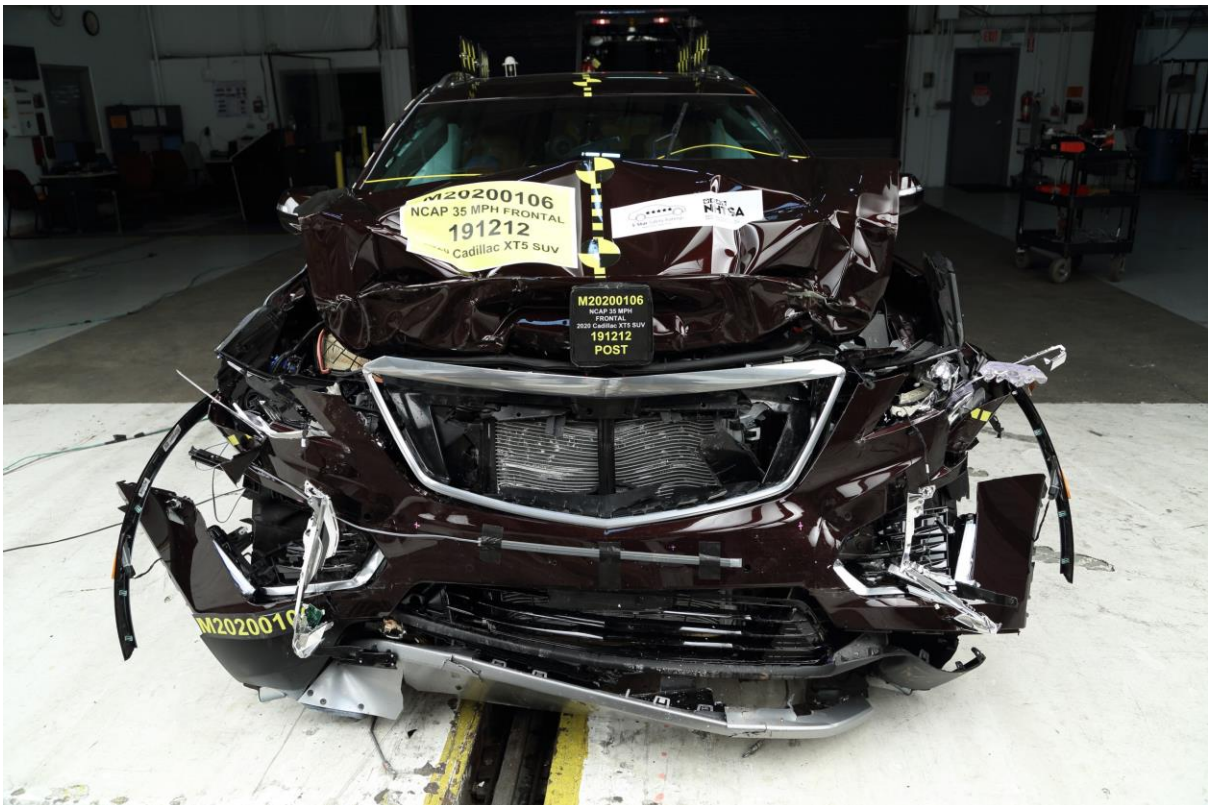

**009 Post-Test Front View of Test Vehicle**



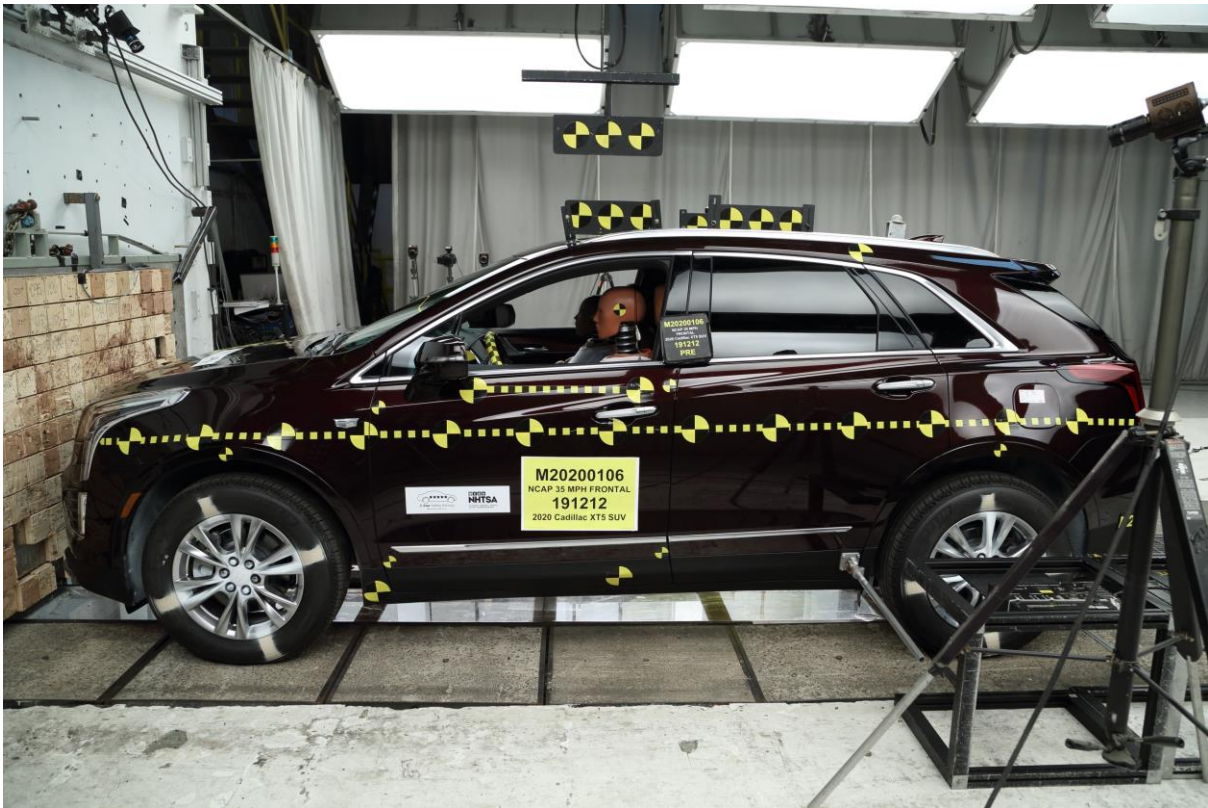

**010 Pre-Test Left View of Test Vehicle**



**011 Post-Test Left View of Test Vehicle**





**012 Pre-Test Right View of Test Vehicle**



**013 Post-Test Right View of Test Vehicle**





**014 Pre-Test Right Front 3-4 View**



**015 Post-Test Right Front 3-4 View**






**016 Pre-Test Left Rear 3-4 View**




**017 Post-Test Left Rear 3-4 View**



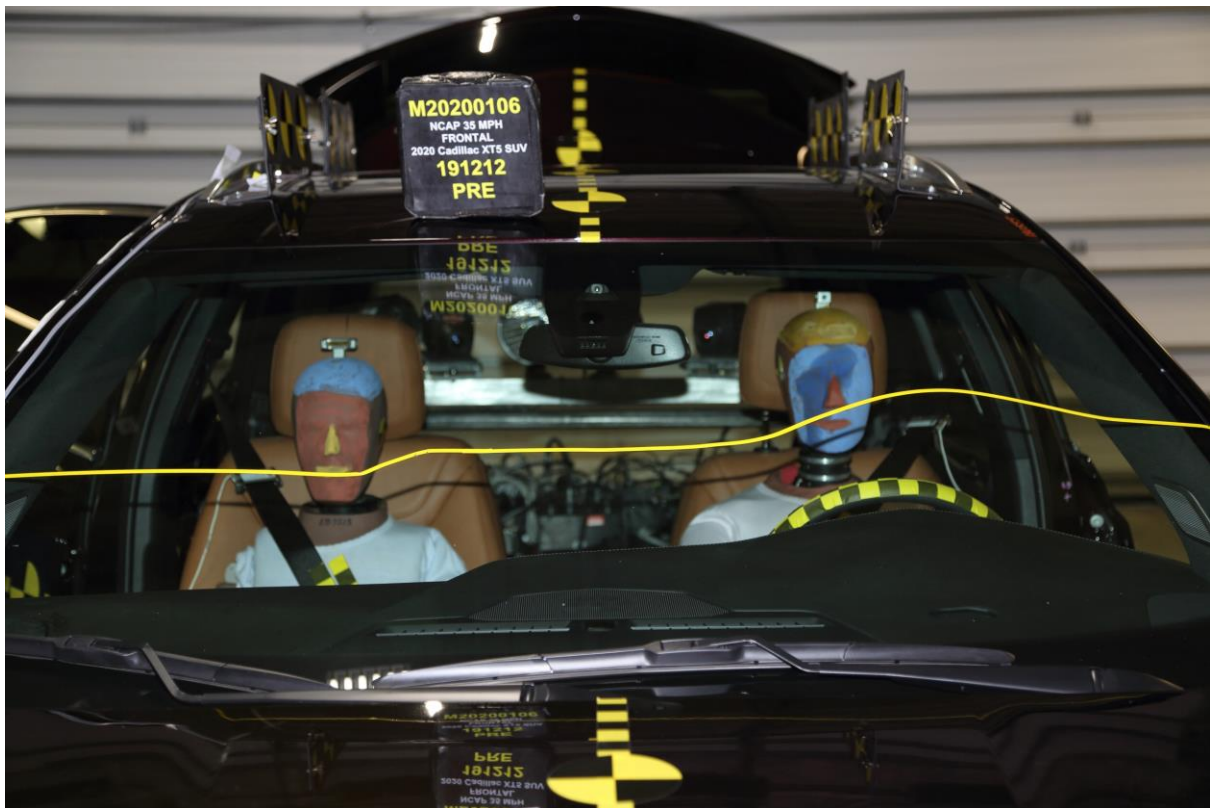

018 Pre-Test Windshield View

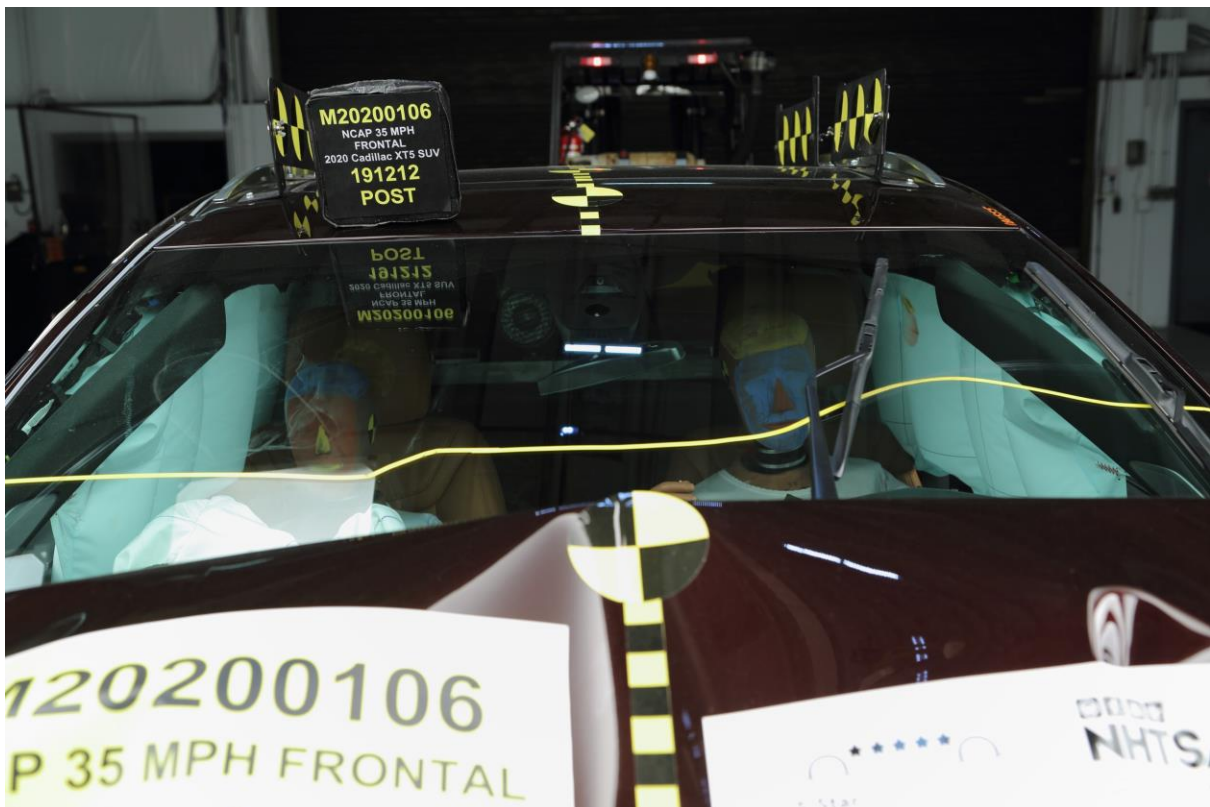

019 Post-Test Windshield View



**020 Pre-Test Engine Compartment View**



**021 Post-Test Engine Compartment View**






022 Pre-Test Fuel Filler Cap View




023 Post-Test Fuel Filler Cap View



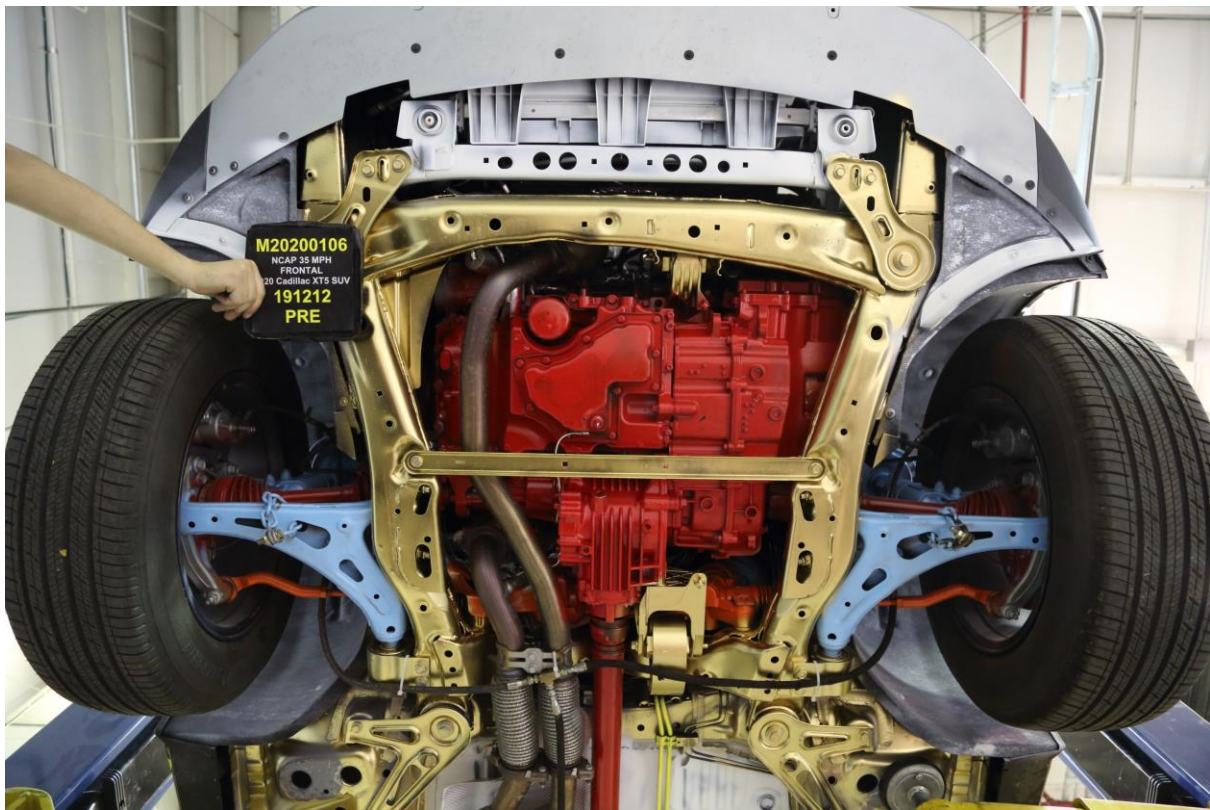


**024 Pre-Test Front Underbody View**

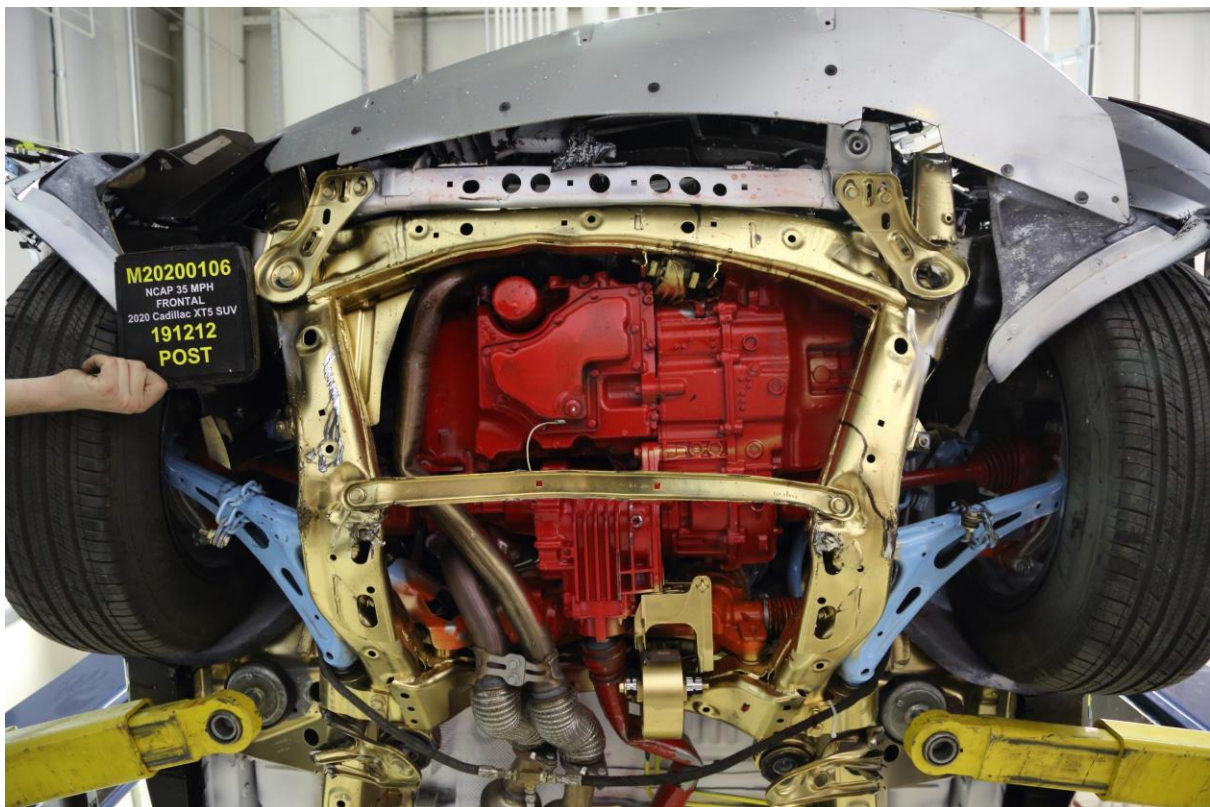


**025 Post-Test Front Underbody View**



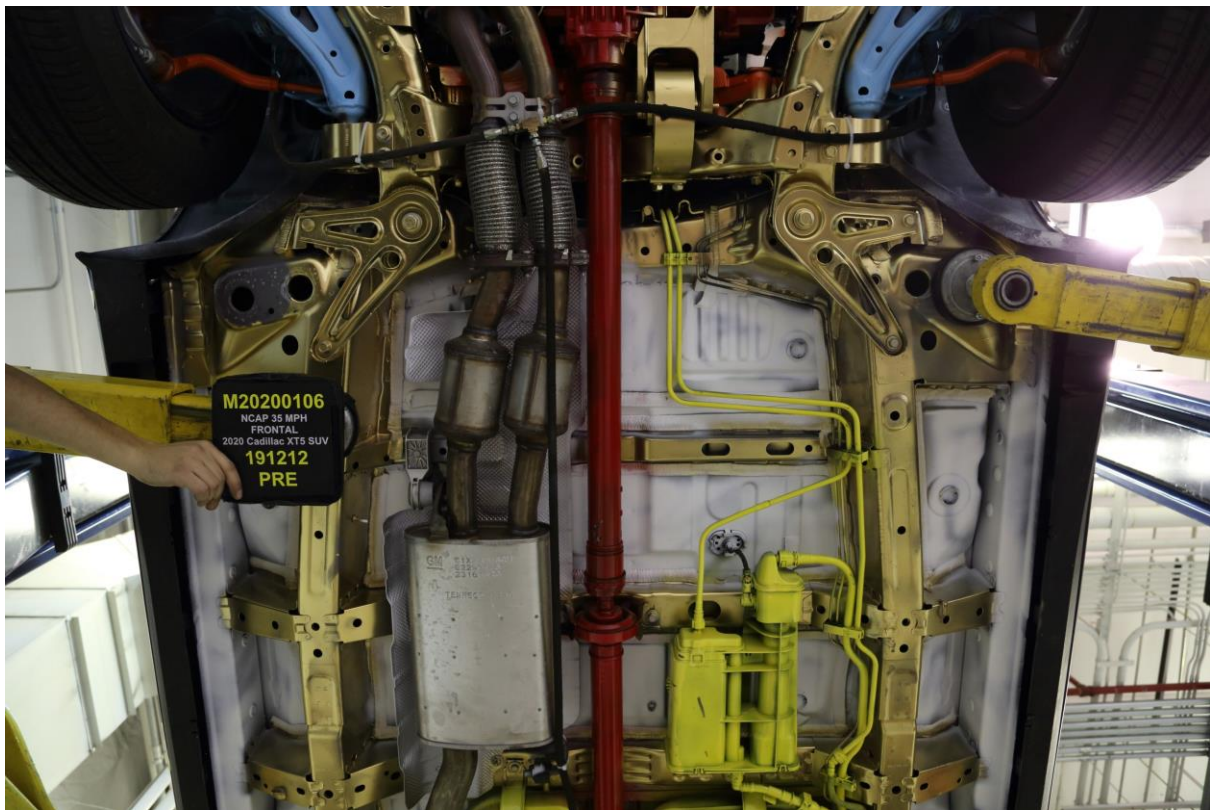


**025a Pre-Test Mid Front Underbody View**

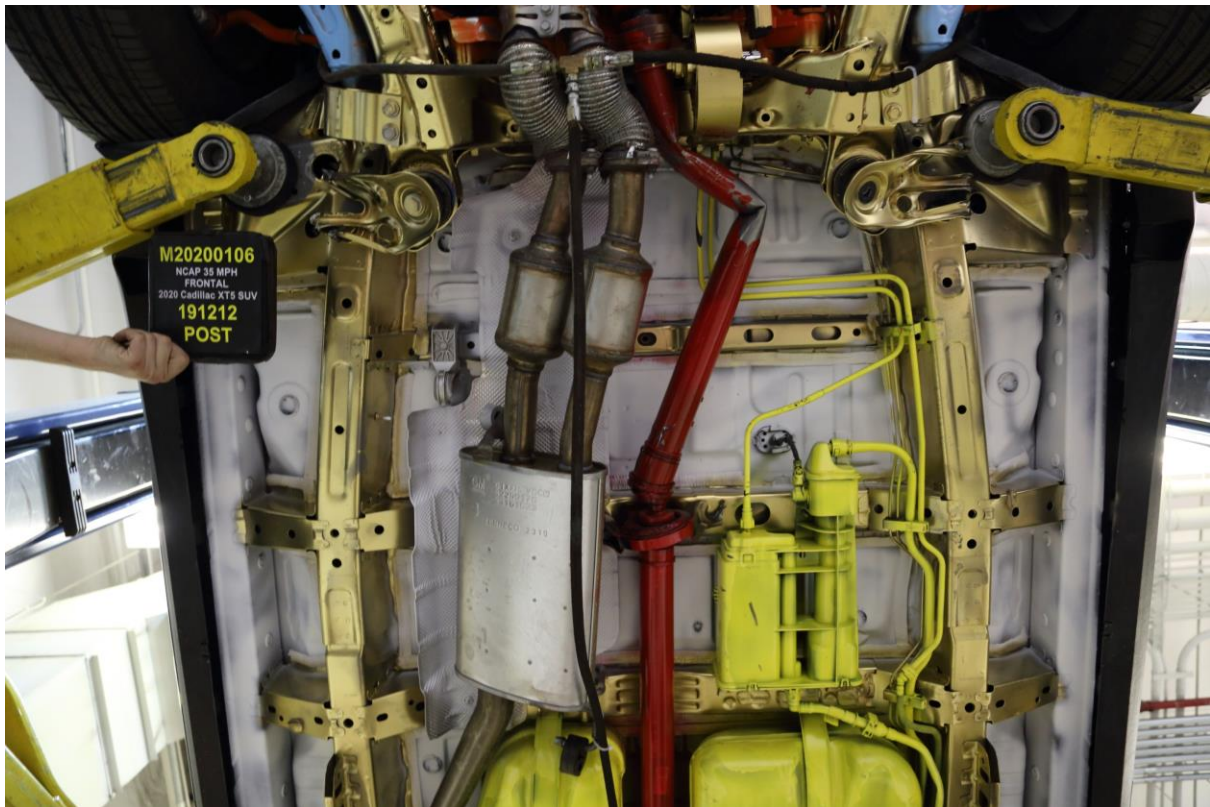


**025b Post-Test Mid Front Underbody View**



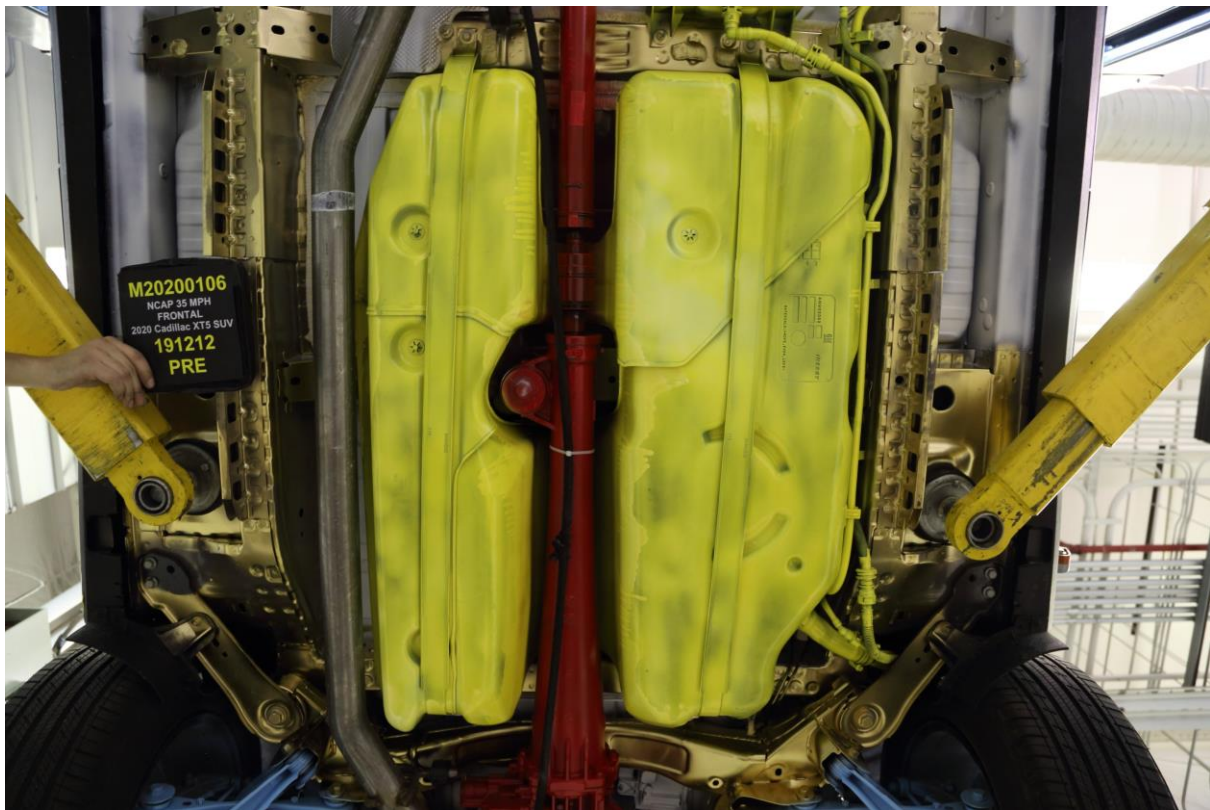


**025c Pre-Test Mid Rear Underbody View**

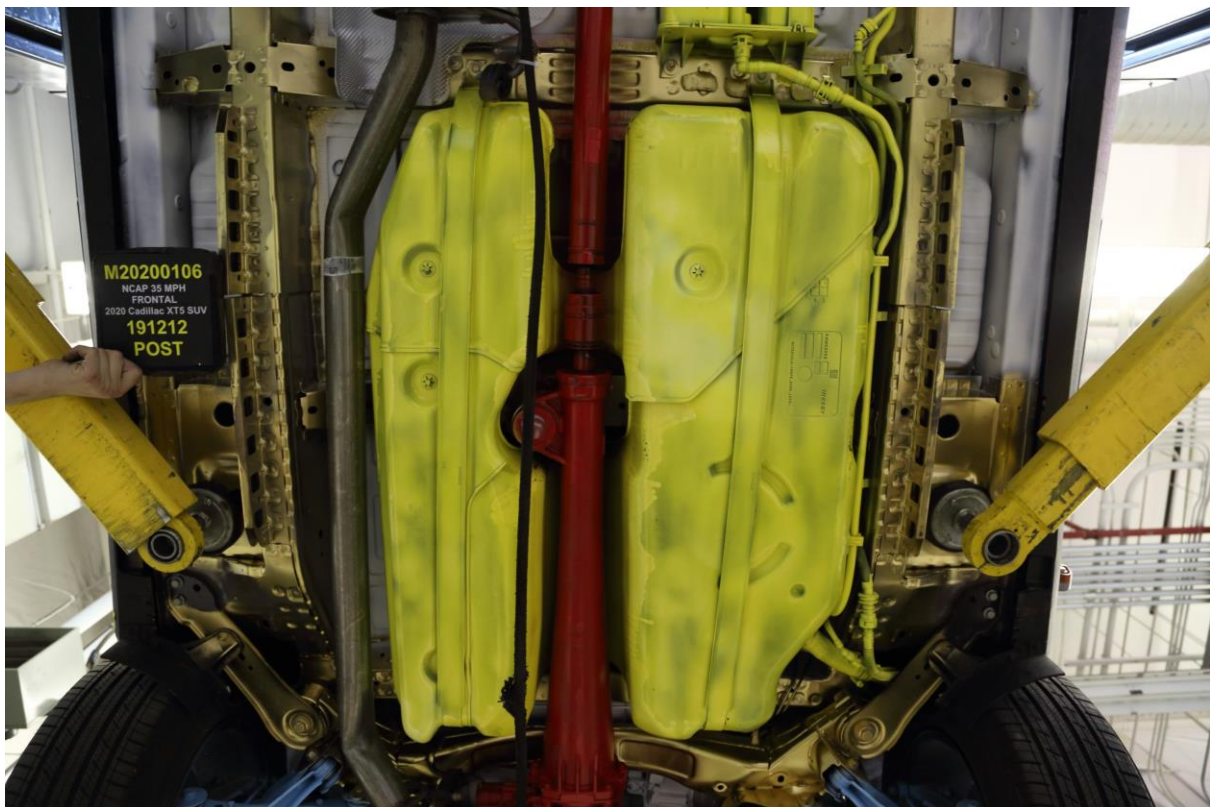


**025d Post-Test Mid Rear Underbody View**



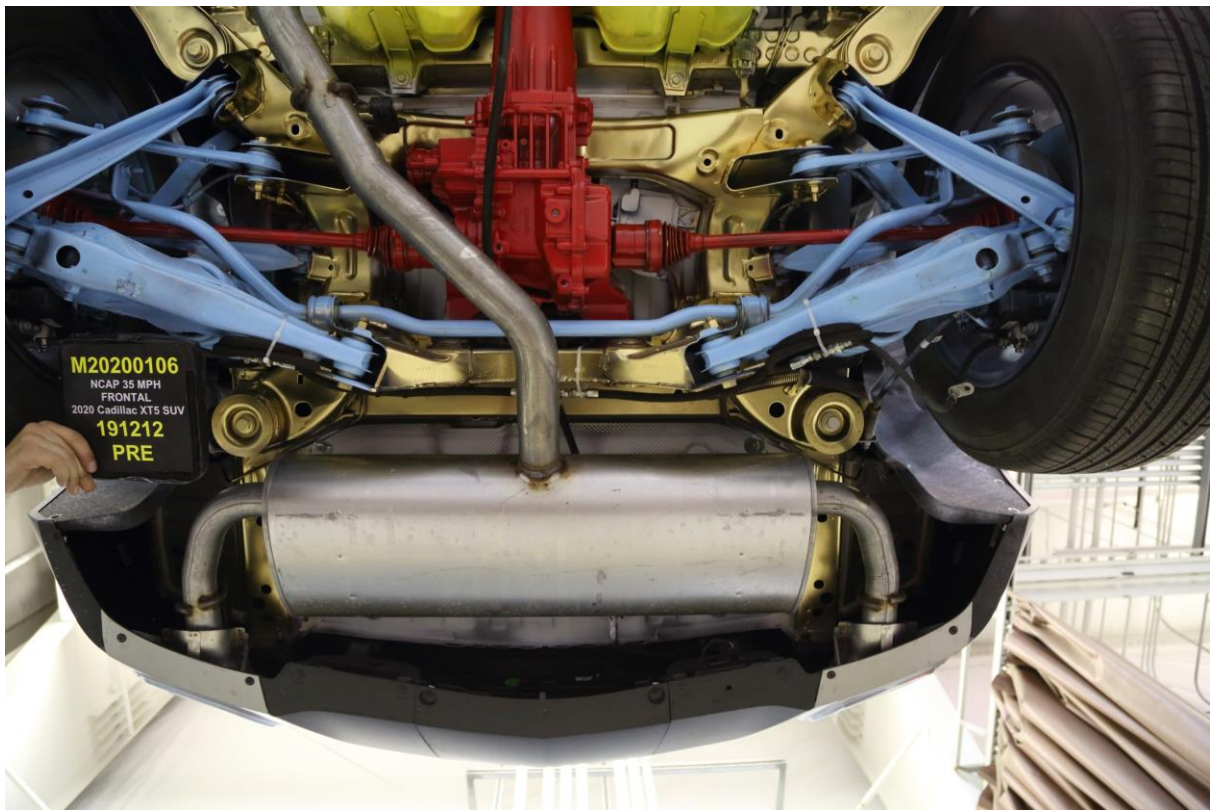

**026 Pre-Test Rear Underbody View**

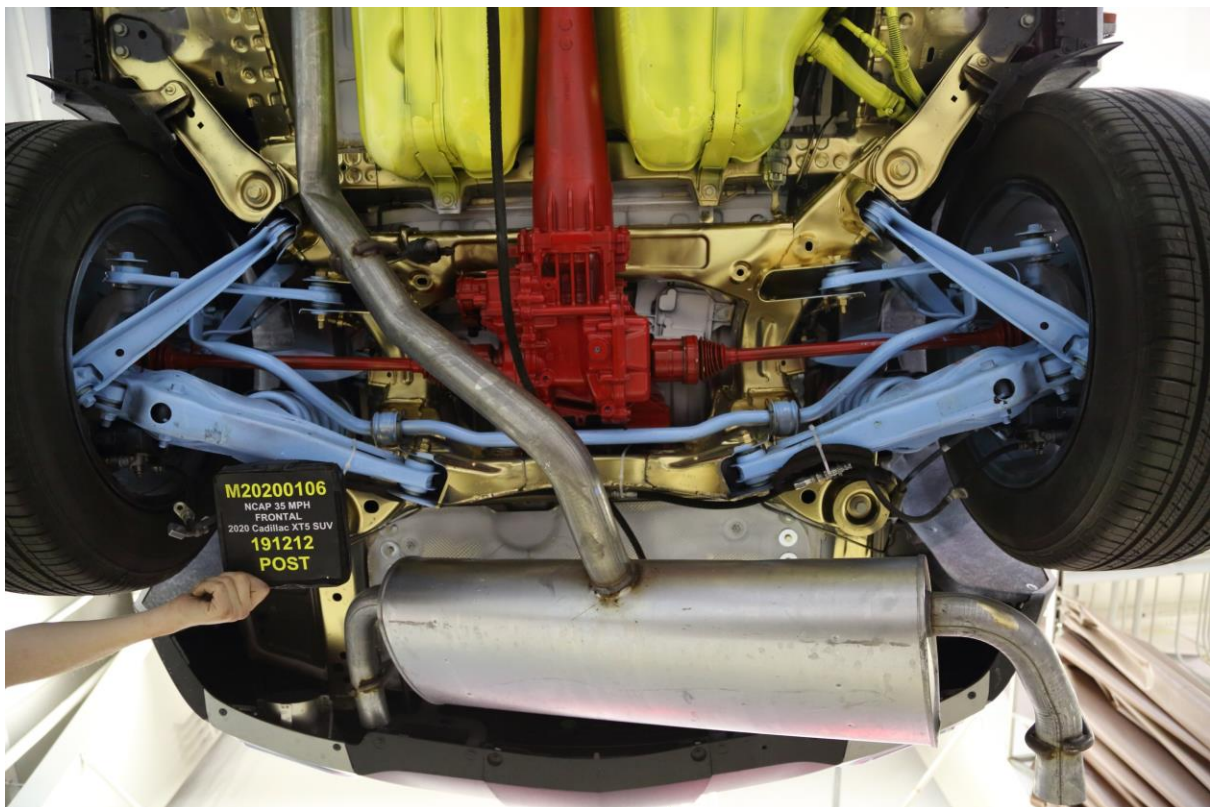


**027 Post-Test Rear Underbody View**






**028 Pre-Test Dummy Cable Routing**

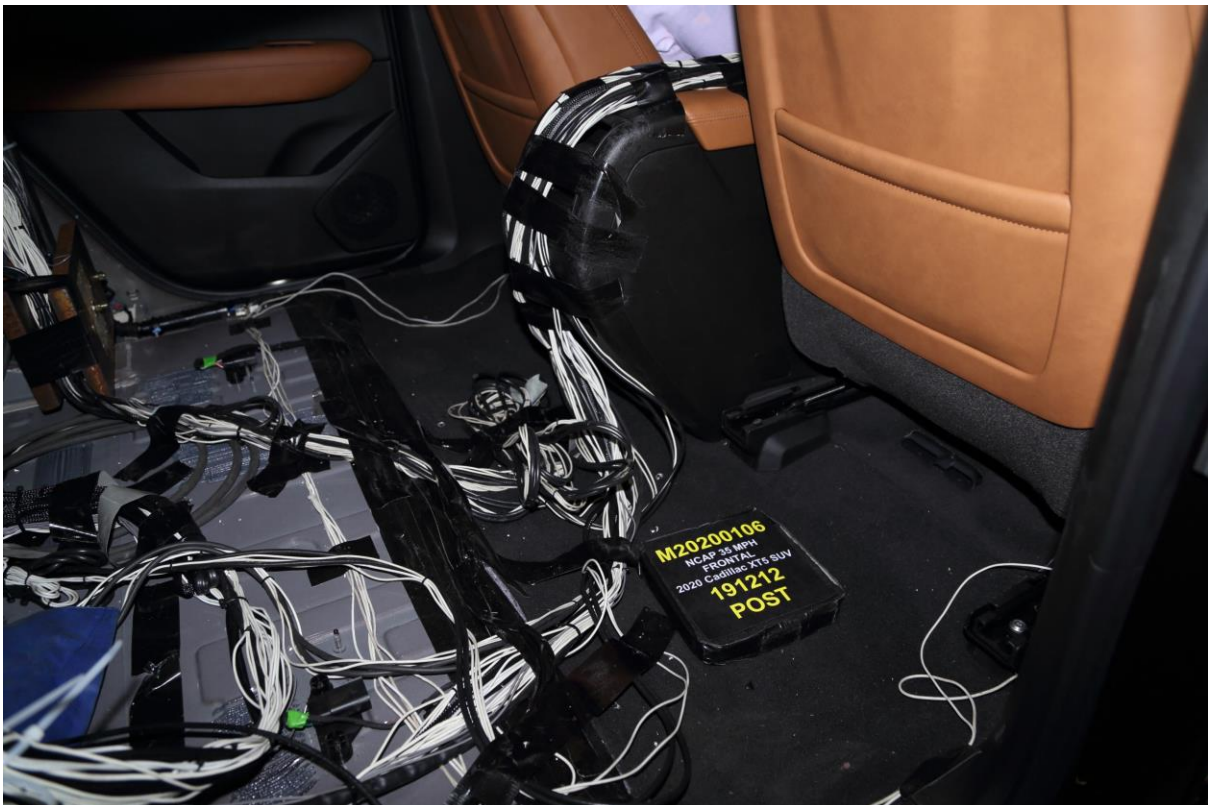

**029 Post-Test Dummy Cable Routing**



**030 Pre-Test Driver Dummy Front View**

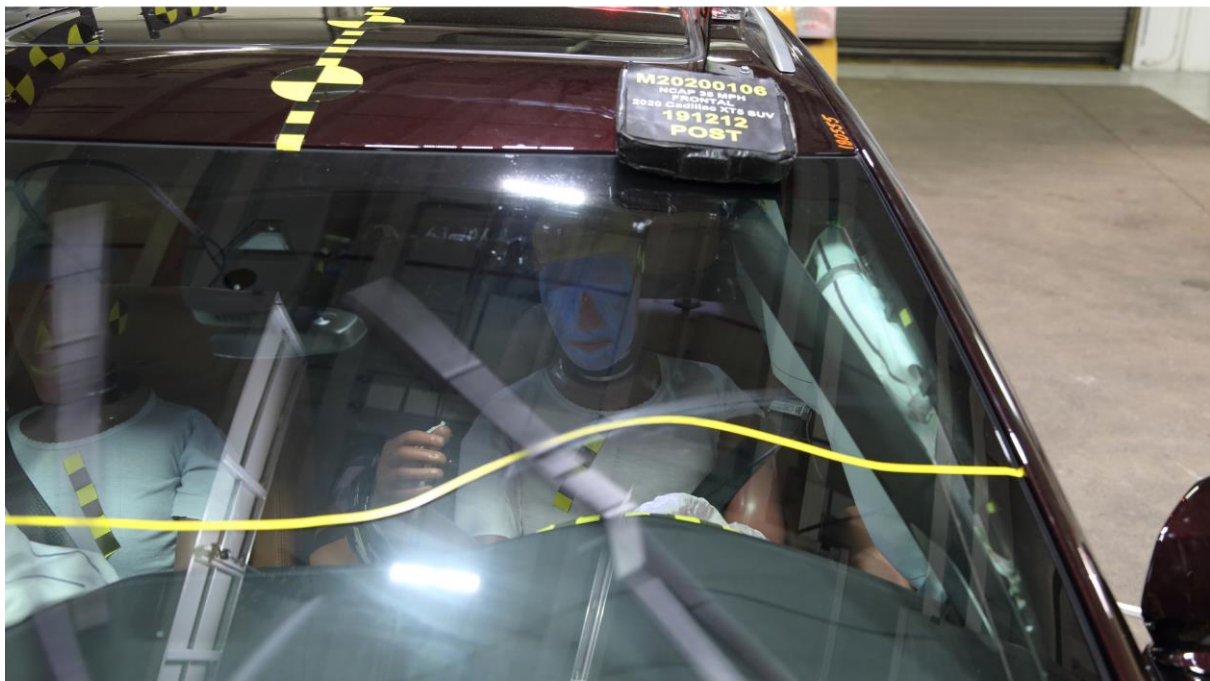

**031 Post-Test Driver Dummy Front View**






**032 Pre-Test Driver Dummy Window View**



**033 Post-Test Driver Dummy Window View**

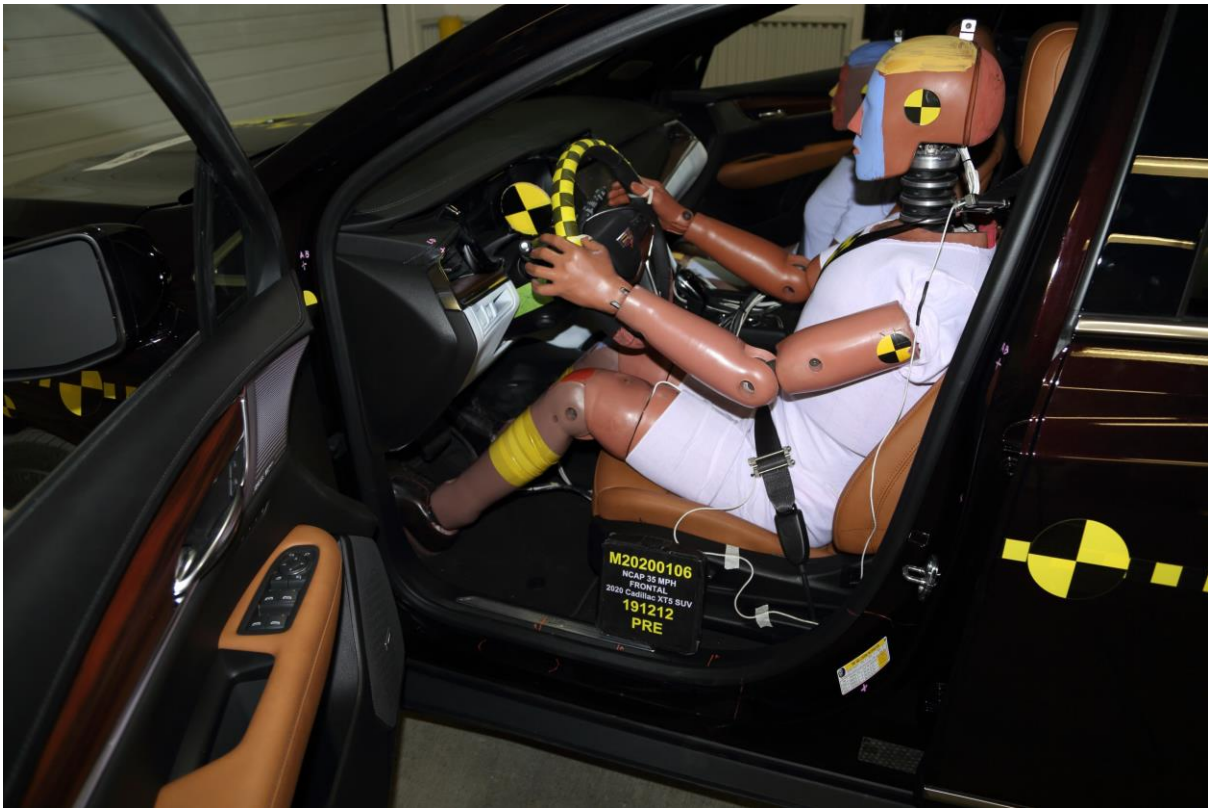

**034 Pre-Test Driver Dummy and Vehicle Interior View**




**035 Post-Test Driver Dummy and Vehicle Interior View**






**036 Pre-Test Driver's Seat Fore-Aft Markings**

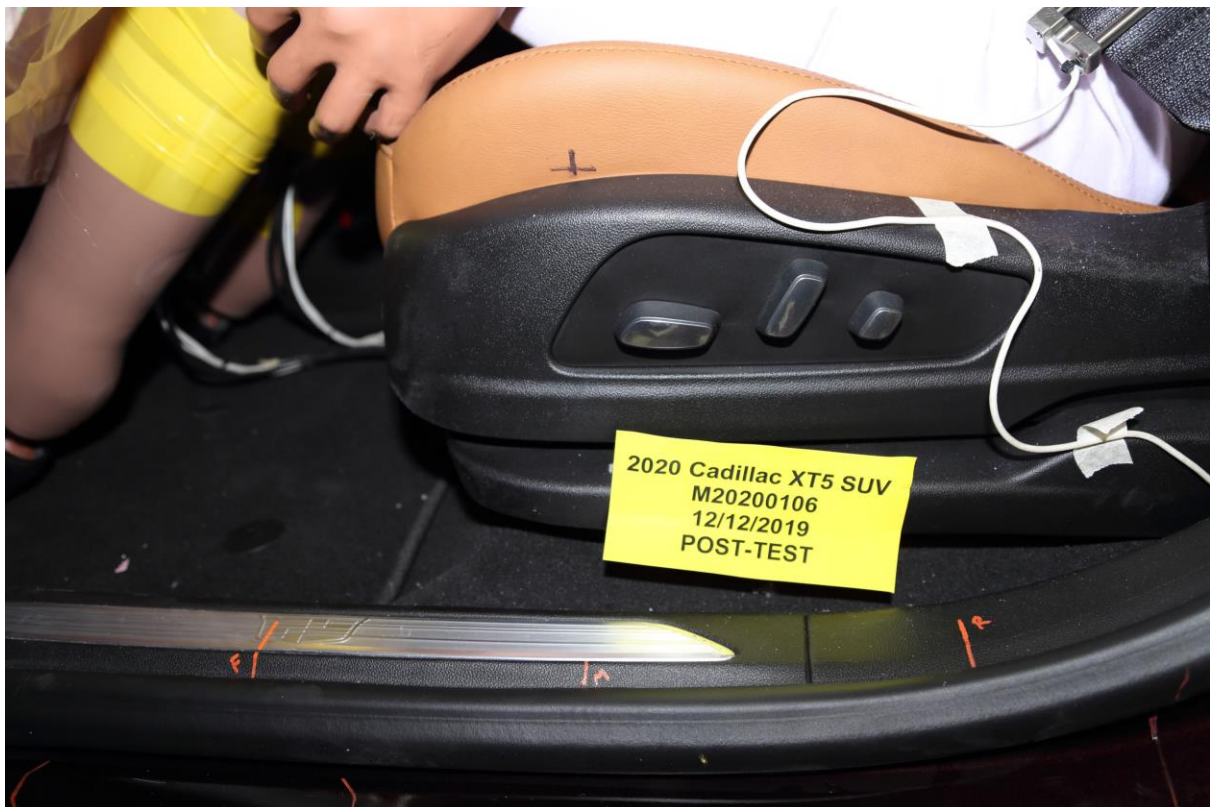

**037 Post-Test Driver's Seat Fore-Aft Markings**



**038 Pre-Test View of Belt Anchorage for Driver Dummy**

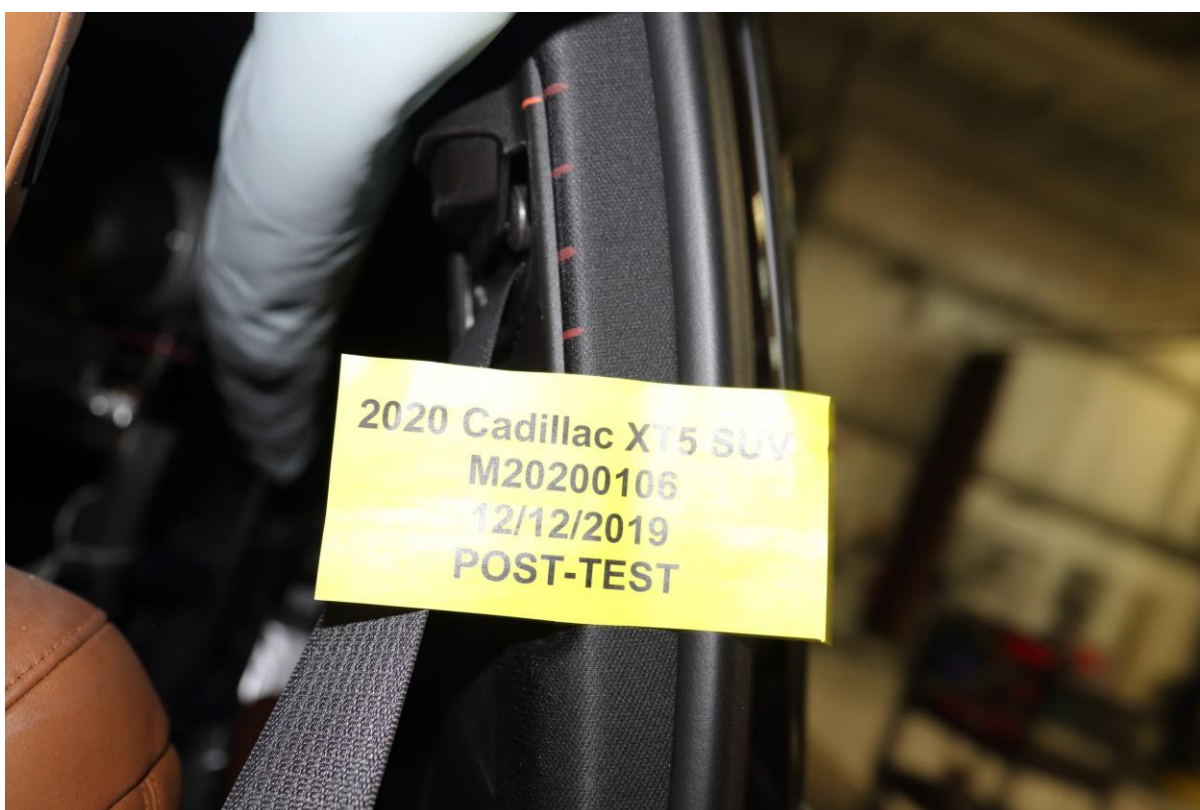


**039 Post-Test View of Belt Anchorage for Driver Dummy**





**040 Pre-Test View of Belt Buckle and Latch Plate for Driver Dummy**

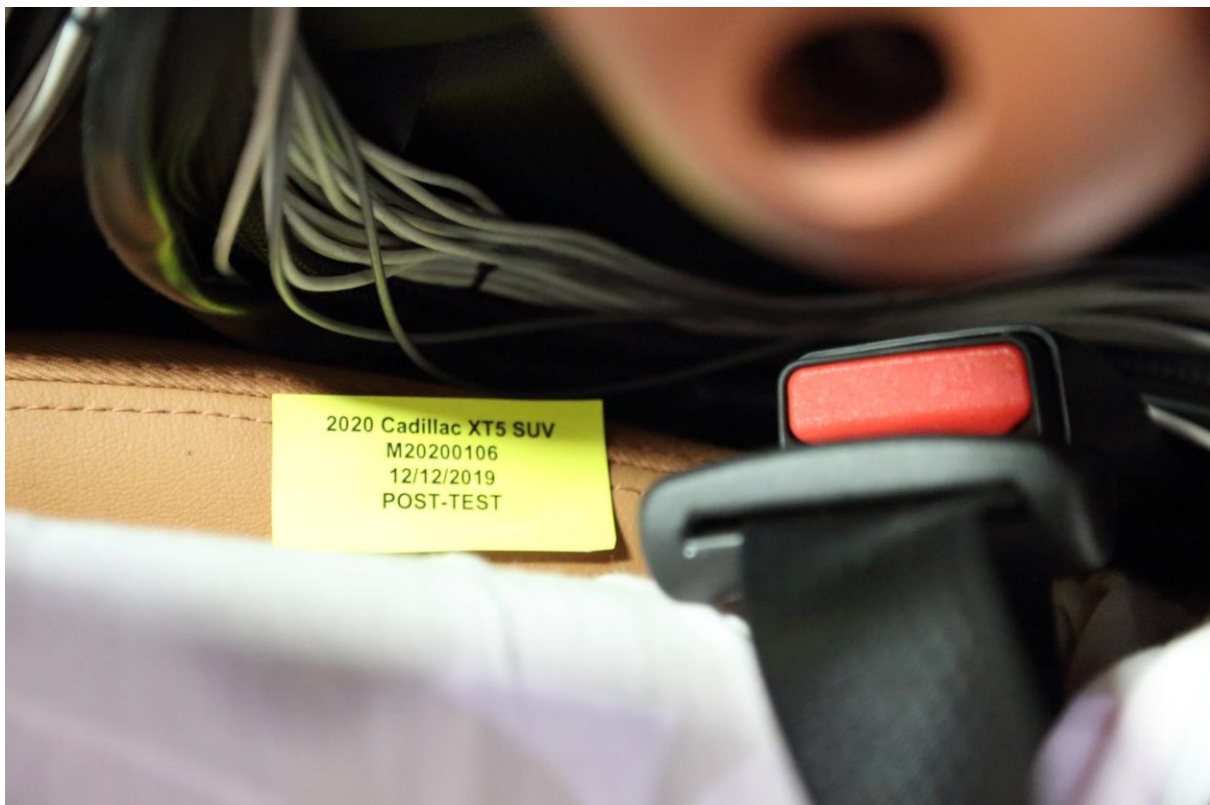

**041 Post-Test View of Belt Buckle and Latch Plate for Driver Dummy**



**042 Pre-Test Driver Dummy Feet**



**043 Post-Test Driver Dummy Feet**





**044 Pre-Test Driver's Side Knee Bolster**



**045 Post-Test Driver's Side Knee Bolster**



**046 Pre-Test Driver's Side Floorpan**



**047 Post-Test Driver's Side Floorpan**





**048 Post-Test Driver Dummy Face**



**049 Post-Test Driver Dummy Contact with Airbag**



**050 Post-Test Driver Dummy Contact with Headrest**

**Intentionally Left Blank**



**051 Pre-Test View of the Steering Wheel**



**052 Post-Test View of the Steering Wheel**





**53 Pre-Test Passenger Dummy Front View**



**054 Post-Test Passenger Dummy Front View**



**055 Pre-Test Passenger Dummy Window View**



**056 Post-Test Passenger Dummy Window View**





**057 Pre-Test Passenger Dummy and Vehicle Interior View**




**058 Post-Test Passenger Dummy and Vehicle Interior View**





**059 Pre-Test Passenger's Seat Fore-Aft Markings**

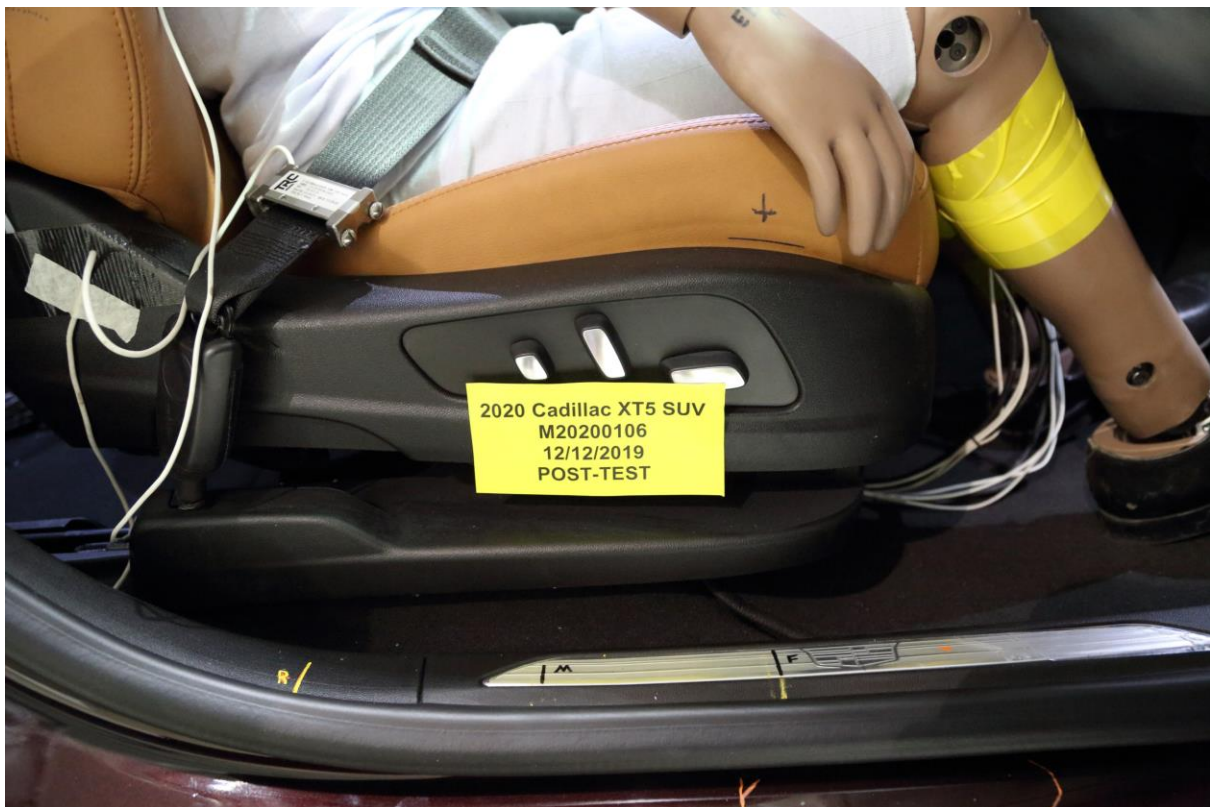

**060 Post-Test Passenger's Seat Fore-Aft Markings**




**061 Pre-Test View of Belt Anchorage for Passenger Dummy**



**062 Post-Test View of Belt Anchorage for Passenger Dummy**



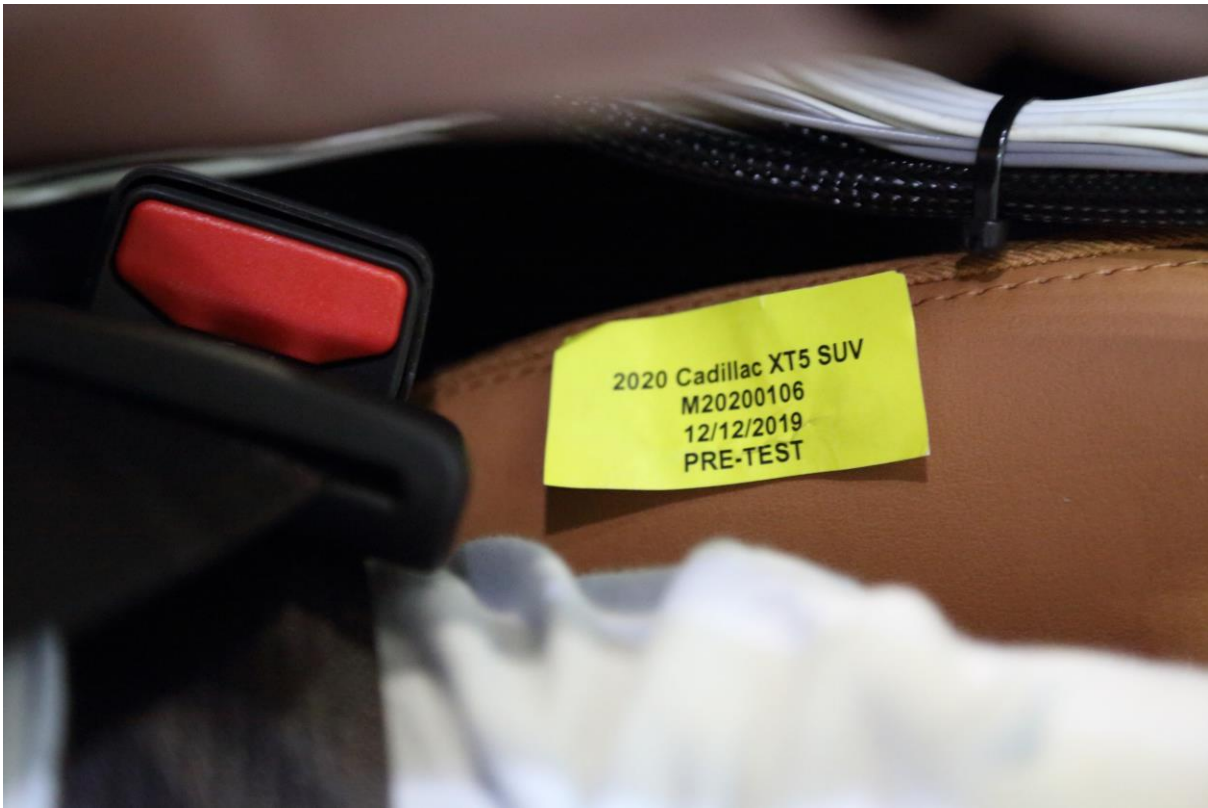


**063 Pre-Test View of Belt Buckle and Latch Plate for Passenger Dummy**



**064 Post-Test View of Belt Buckle and Latch Plate for Passenger Dummy**



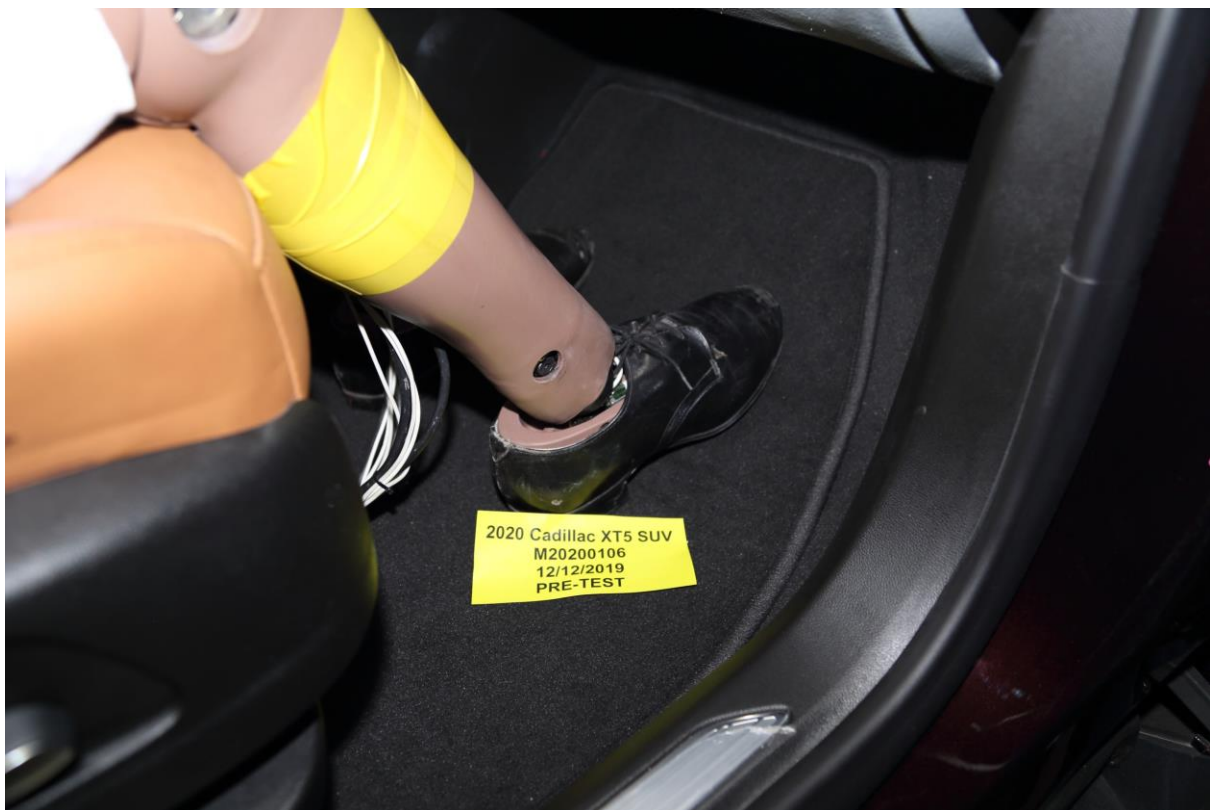

**065 Pre-Test Passenger Dummy Feet**



**066 Post-Test Passenger Dummy Feet**



**067 Pre-Test Passenger's Side Knee Bolster**



**068 Post-Test Passenger's Side Knee Bolster**



069 Pre-Test Passenger's Side Floorpan



070 Post-Test Passenger's Side Floorpan






**071 Post-Test Passenger Dummy Face**



**072 Post-Test Passenger Dummy Contact with Airbag**




**073 Post-Test Passenger Dummy Contact with Headrest**

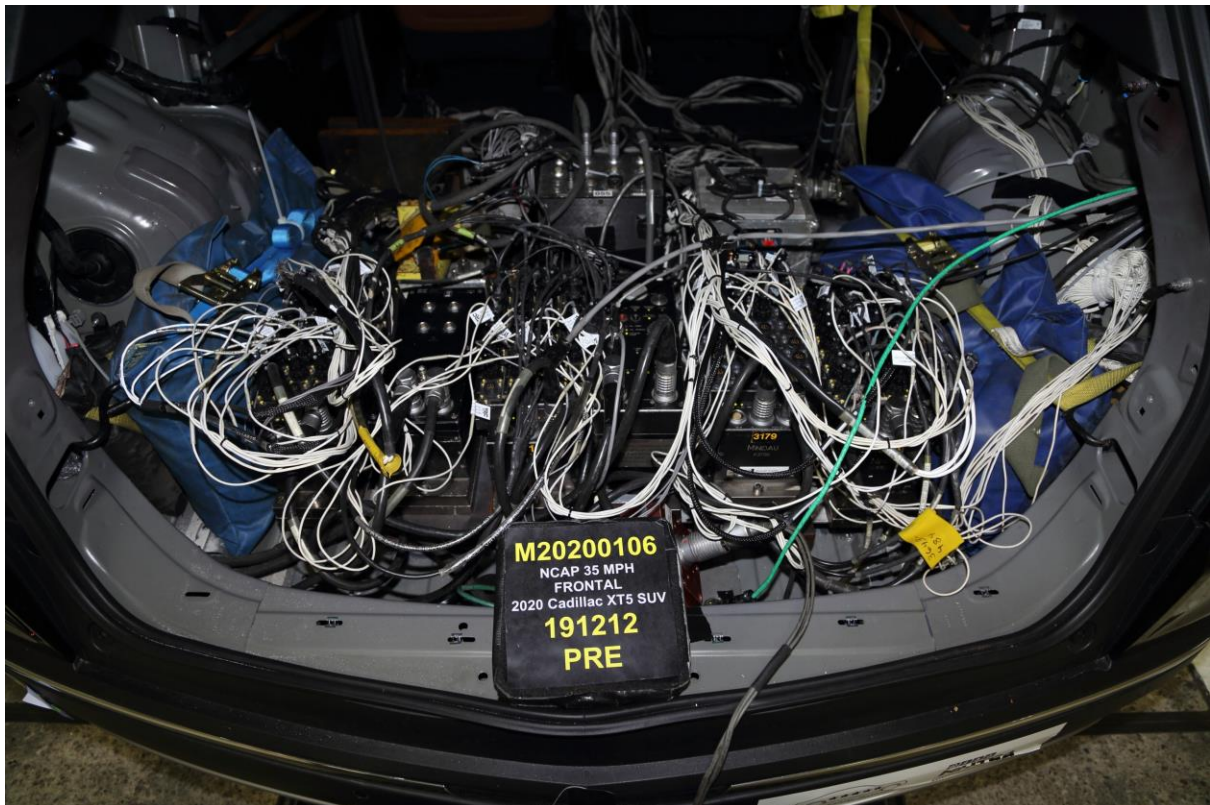

**074 Photograph of Ballast Installed in Vehicle**



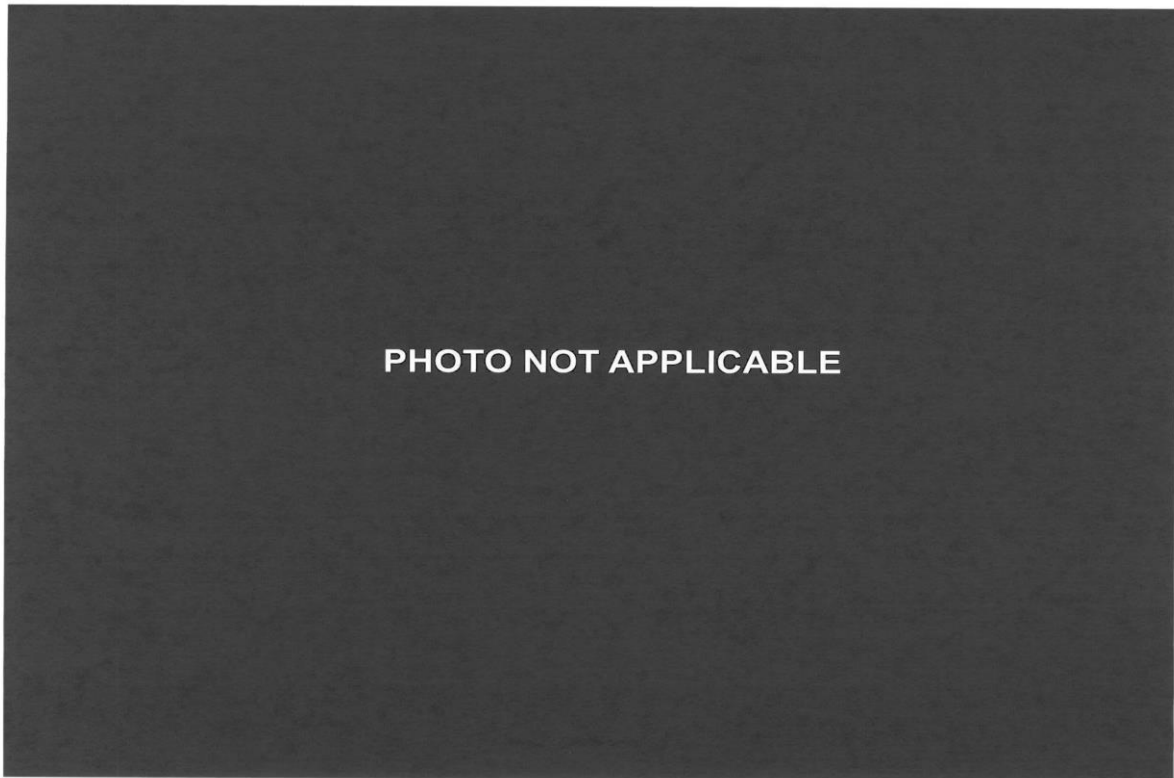


**075 Post-Test Stoddard Spillage Location View**




**076 Post-Test Speed Trap Read out**



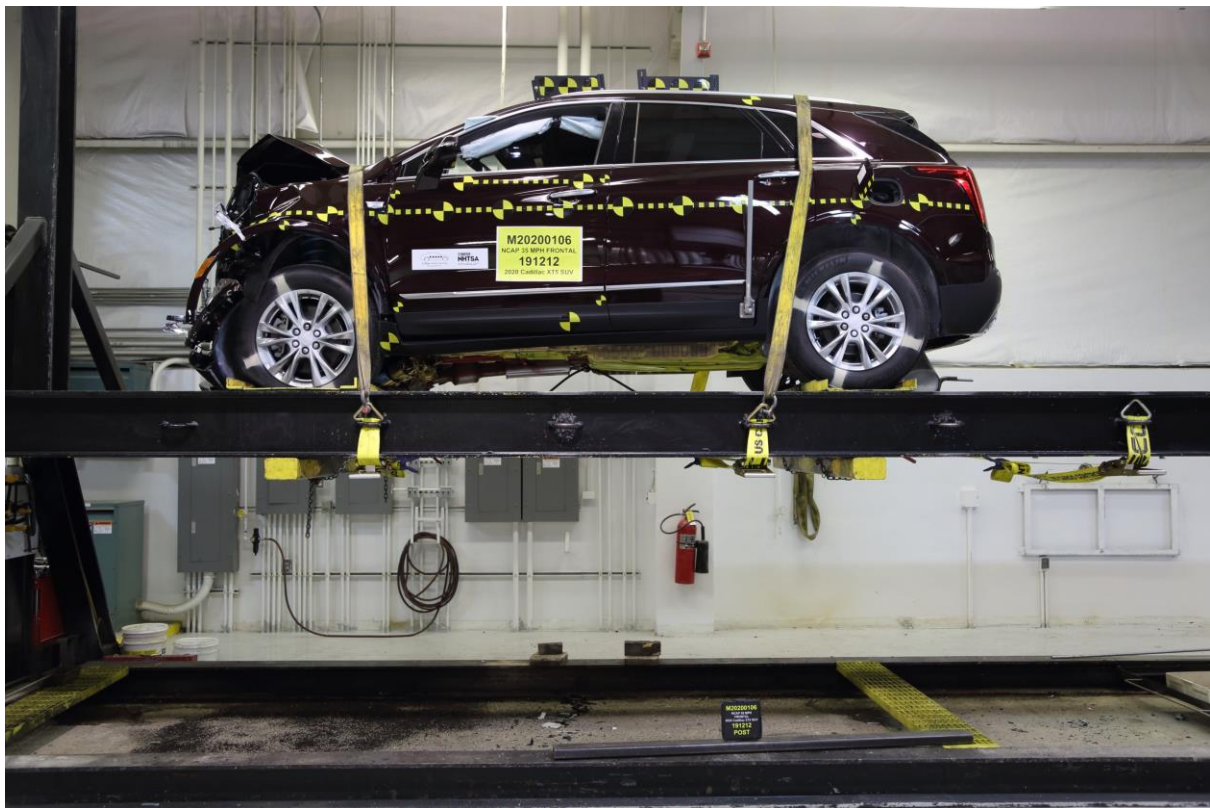


**077 Vehicle at 0° on Static Rollover Device**

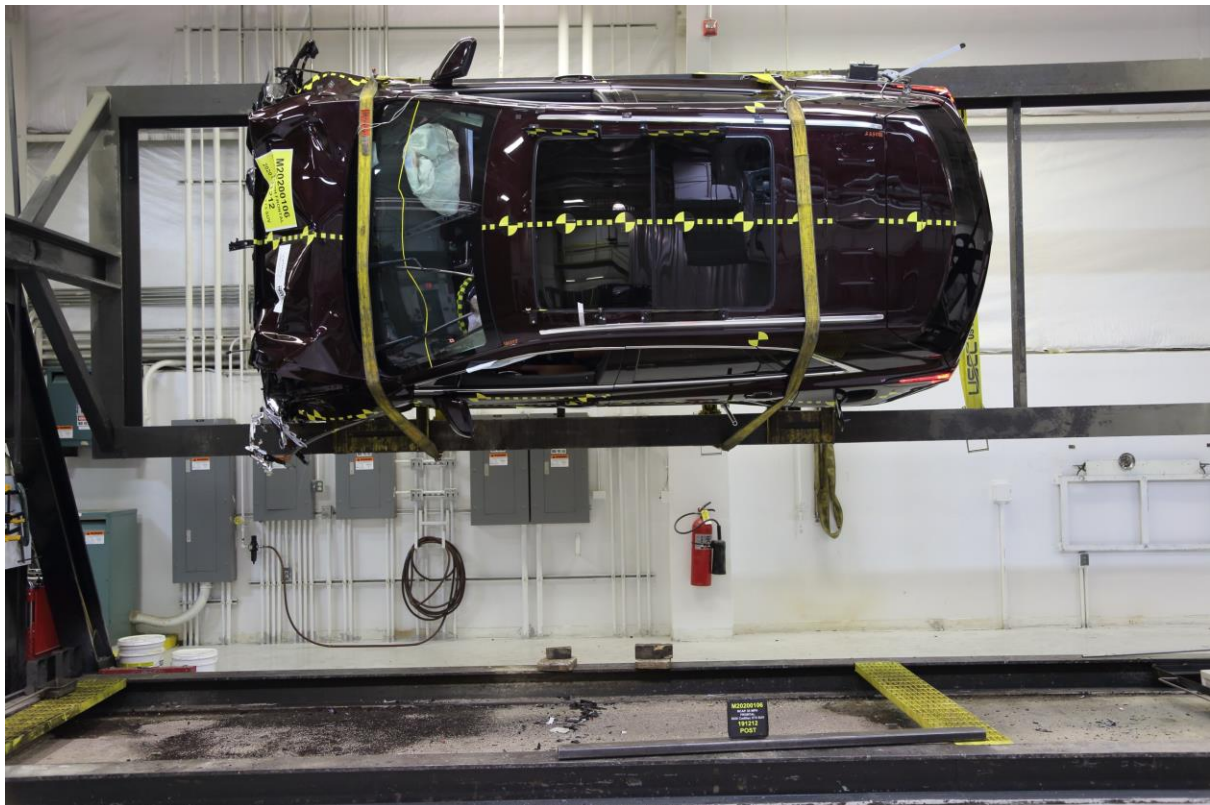


**078 Vehicle at 90° on Static Rollover Device**



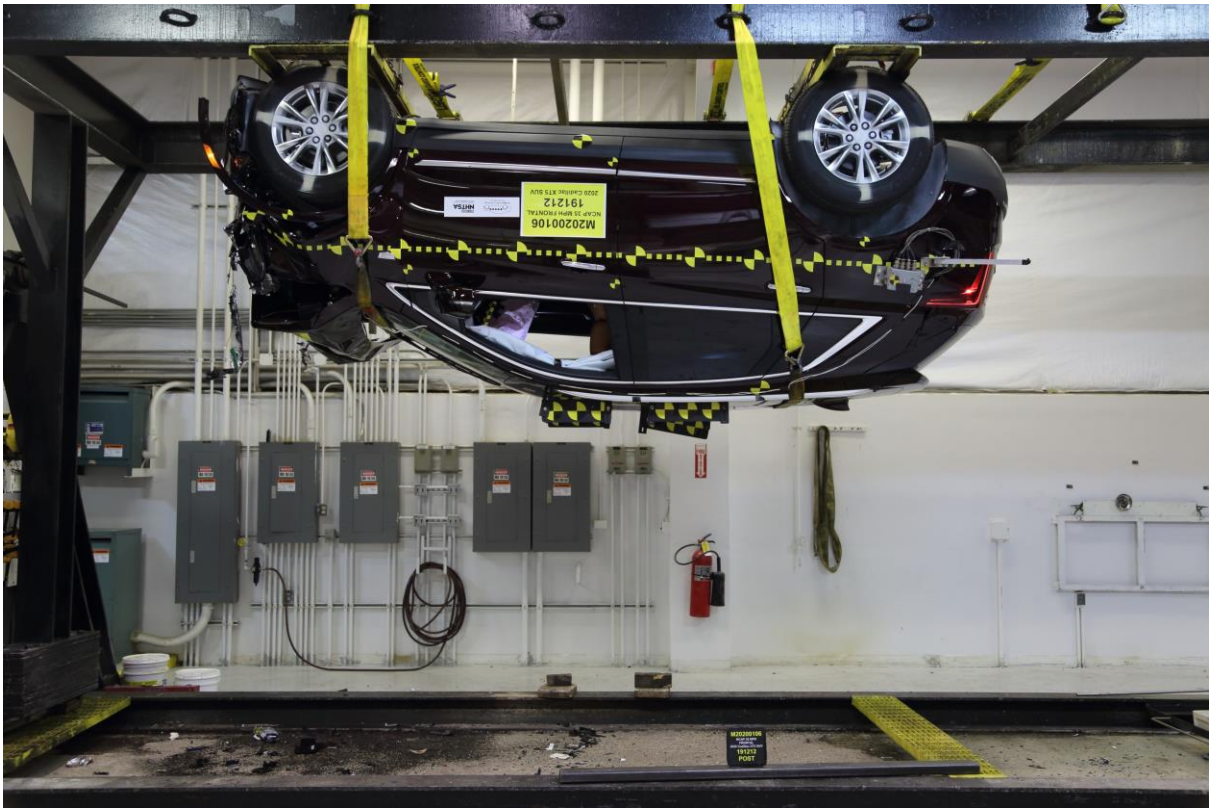


**079 Vehicle at 180° on Static Rollover Device**

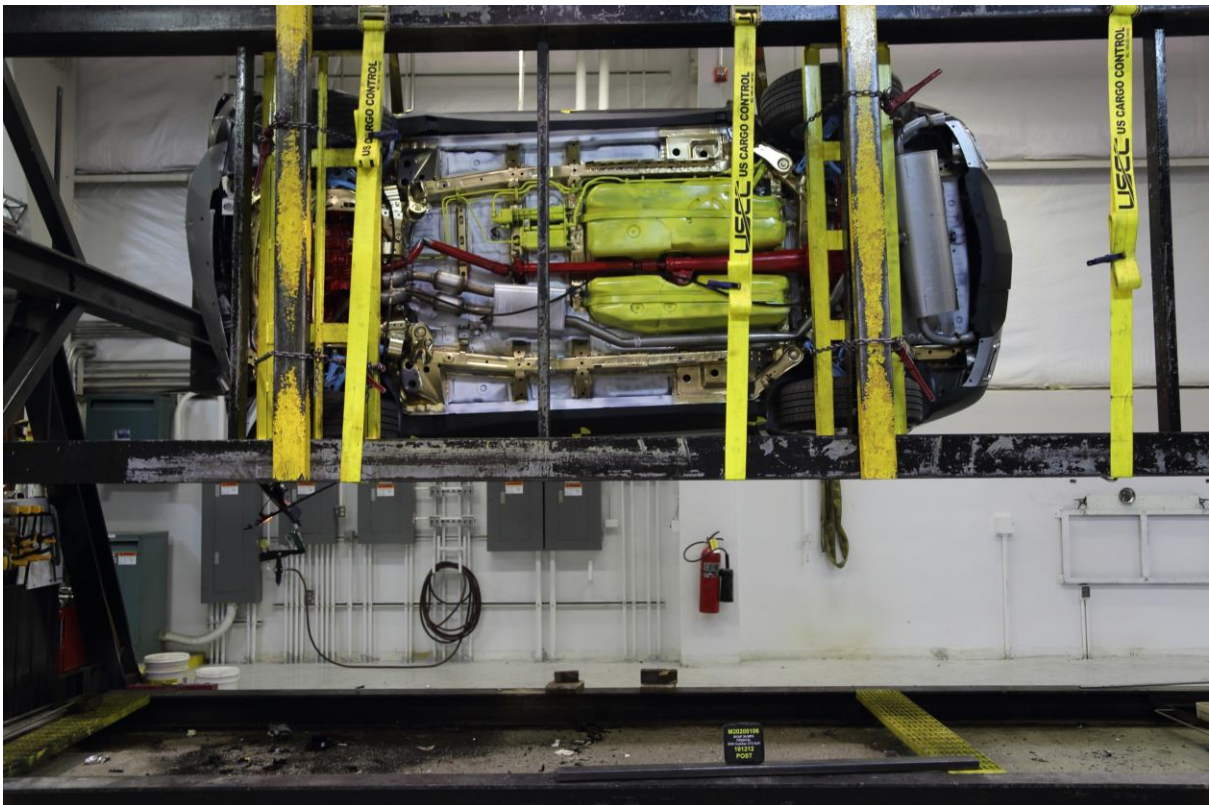

**080 Vehicle at 270° on Static Rollover Device**



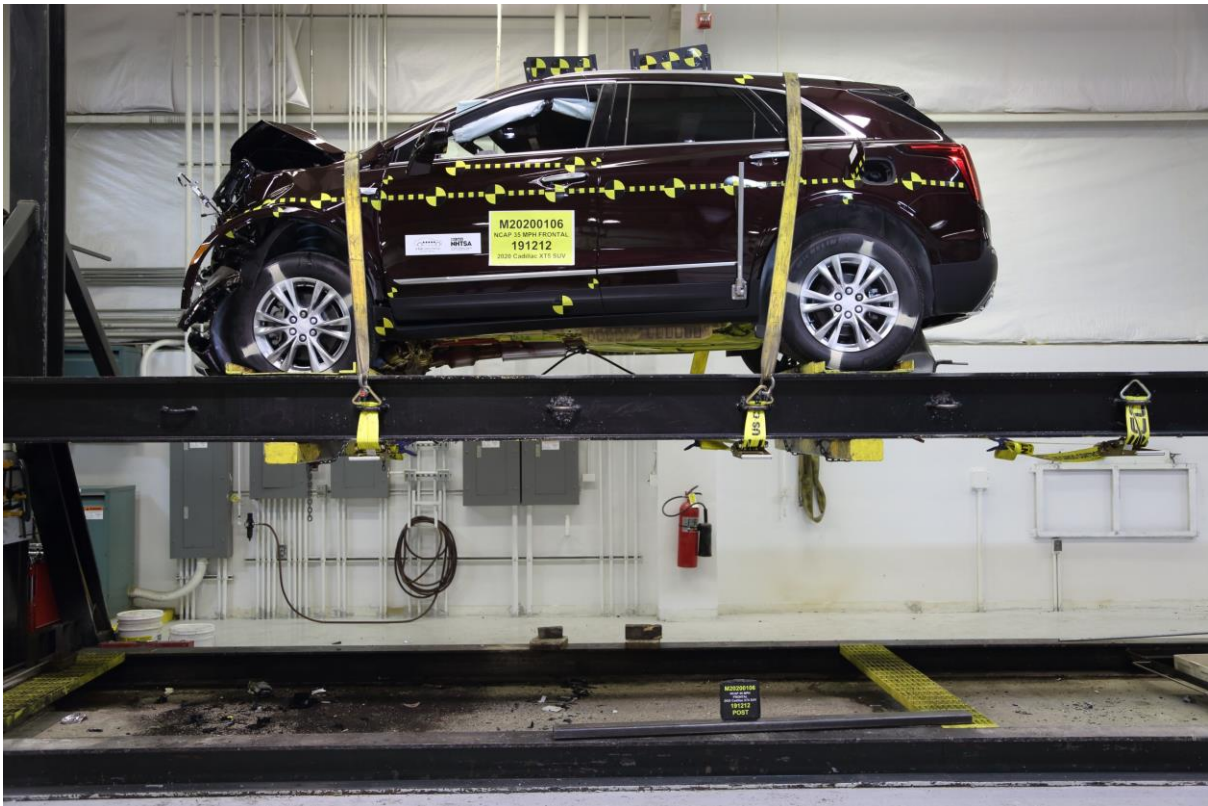

**081 Vehicle at 360° on Static Rollover Device**



**082 2020 Cadillac XT5 SUV Frontal Impact Event**





## 2020 XT5 PREMIUM LUXURY AWD

EXTERIOR: GARNET METALLIC  
INTERIOR: SEDONA SAUVAGE/JET  
BLACK ACCENT

ENGINE: 3.6L V6, DI, VVT  
TRANSMISSION: 9-SPEED AUTOMATIC

Visit us at [www.cadillac.com](http://www.cadillac.com)

### STANDARD EQUIPMENT

ITEMS LISTED BELOW ARE INCLUDED AT NO EXTRA CHARGE IN THE STANDARD VEHICLE PRICE SHOWN.

- 4 YEAR / 50,000 MILE\* BUMPER-TO-BUMPER LIMITED WARRANTY
- 6 YEAR / 70,000 MILE\* POWERTRAIN LIMITED WARRANTY, ROADSIDE ASSISTANCE & COURTESY TRANSPORTATION
- FIRST MAINTENANCE VISIT
- WHICHEVER COMES FIRST SEE CADILLAC.COM OR DEALER FOR TERMS, DETAILS & LIMITS

### PERFORMANCE

- ALL WHEEL DRIVE W/ DRIVER MODE SELECT
- WHEELS, 18" 6-DUAL SPOKE W/ PEARL NICKEL PAINT
- TIRE SEALANT & INFLATOR KIT IN PLACE OF SPARE TIRE

### LUXURY & CONVENIENCE

- CADILLAC USER EXPERIENCE, AM/FM STEREO W/ 8" DIAGONAL COLOR INFORMATION DISPLAY, APPLE CARPLAY CAPABILITY AND ANDROID AUTO CAPABILITY PROVIDED BY APPLE AND GOOGLE AVAILABLE WITH COMPATIBLE SMARTPHONES
- SIRIUSXM RADIO CAPABLE, ALL ACCESS TRIAL W/ SUBSCRIPTION SOLD SEPARATELY
- ONSTAR (R) SERVICES & 4G LTE Wi-Fi (R) AVAILABLE; SEE ONSTAR.COM FOR TERMS
- ADAPTIVE REMOTE START
- BOSE PREMIUM AUDIO, 8 SPEAKER
- CARGO MANAGEMENT SYSTEM
- CLIMATE CONTROL, DUAL-ZONE AUTOMATIC
- DOOR HANDLES, ILLUMINATED
- DRIVER MEMORY PACKAGE
- HEATED SEATS, FRONT

- INSIDE REARVIEW MIRROR, AUTO DIMMING
- INTELLIBEAM HEADLAMPS
- LED HEADLAMPS & TAILLAMPS
- LAMPS, FRONT CORNERING
- LED DAYTIME RUNNING LAMPS
- LEATHER SEATING SURFACES
- LIFTGATE, HANDS-FREE POWER POWER FOLDING, DRIVER SIDE
- AUTO-DIMMING, TURN SIGNAL
- PASSIVE ENTRY & KEYLESS START
- POWER SEAT ADJUSTER, DRIVER 8-WAY & PASS 6-WAY
- POWER LUMBAR, 2-WAY, FRONT
- REAR CARGO SHADE, RETRACTABLE
- REAR SEAT REMINDER
- STEERING WHEEL, HEATED
- ULTRAVIEW W/ SUNROOF WITH POWER SUNSHADE
- WIPER, FRONT, RAINSENSE
- WIRELESS CHARGING

### SAFETY & SECURITY

- AUTOMATIC EMERGENCY BRAKING
- FORWARD COLLISION ALERT
- FOLLOWING DISTANCE INDICATOR
- FRONT PEDESTRIAN BRAKING
- LANE CHANGE ALERT WITH SIDE BLIND ZONE ALERT
- REAR CROSS TRAFFIC ALERT
- SAFETY ALERT SEAT
- FRONT AND REAR PARK ASSIST
- HD REAR VISION CAMERA
- TEEN DRIVER
- THEFT-DETERRENT ALARM SYSTEM, SENSOR, VEHICLE INCLINATION
- SENSOR, INTERIOR MOVEMENT
- STEERING COLUMN, LOCK CONTROL
- DOOR LOCK & LATCH SHELDS

STANDARD VEHICLE PRICE **\$50,795.00**

### OPTIONS & PRICING

### OPTIONS INSTALLED BY THE MANUFACTURER MAY REPLACE STANDARD EQUIPMENT SHOWN

CADILLAC USER EXPERIENCE WITH EMBEDDED NAVIGATION, W/ BOSE PERFORMANCE SERIES 14 SPEAKER AUDIO SYSTEM

ENGINE: 3.6L V6, DI, VVT  
W/ AUTOMATIC STOP/START

GARNET METALLIC 625.00

COMPACT SPARE TIRE (REPLACES TIRE SEALANT & INFLATOR KIT) 350.00

TOOL KIT

CARGO NET, LATERAL MESH

TOTAL OPTIONS \$3,000.00

TOTAL VEHICLE & OPTIONS \$53,795.00

DESTINATION CHARGE 995.00

TOTAL VEHICLE PRICE\* **\$54,790.00**

### EPA DOT Fuel Economy and Environment

**Fuel Economy**

**20** MPG combined city/hwy

18 city 25 highway

5.0 gallons per 100 miles

### Gasoline Vehicle

**You spend \$2,500 more in fuel costs over 5 years** compared to the average new vehicle.

**Annual fuel cost \$2,000**

**Fuel Economy & Greenhouse Gas Rating** (tailpipe only)

4

1 10 Best

**Smog Rating** (tailpipe only)

6

1 10 Best

Actual results will vary for many reasons, including driving conditions and how you drive and maintain your vehicle. The average new vehicle gets 23 MPG and costs \$7,500 to fuel over 5 years. Cost estimates are based on 15,000 miles per year at \$2.70 per gallon. 1984 is miles per gasoline gallon equivalent. Vehicle emissions are a significant cause of climate change and smog.

**fuel economy.gov**

Calculate personalized estimates and compare vehicles

### GOVERNMENT 5-STAR SAFETY RATINGS

**Overall Vehicle Score Not Rated**

Based on the combined ratings of frontal, side and rollover. Should ONLY be compared to other vehicles of similar size and weight.

**Frontal Crash**

Driver Passenger Not Rated Not Rated

Based on the risk of injury in a frontal impact. Should ONLY be compared to other vehicles of similar size and weight.

**Side Crash**

Front seat Rear seat ★★★★★ ★★★★★

Based on the risk of injury in a side impact.

**Rollover**

★★★★★

Based on the risk of rollover in a single-vehicle crash.

Star ratings range from 1 to 5 stars (★★★★★) with 5 being the highest.

Source: National Highway Traffic Safety Administration (NHTSA)

[www.safercar.gov](http://www.safercar.gov) or 1-888-327-4236

Equipped with the safety and security of OnStar.

Visit [onstar.com](http://onstar.com) for details.

onstar.com/onyou

### PARTS CONTENT INFORMATION

FOR VEHICLES IN THIS CARLINE: U.S./CANADIAN PARTS CONTENT: 52%

MAJOR SOURCES OF FOREIGN PARTS CONTENT: MEXICO 21%

NOTE: PARTS CONTENT DOES NOT INCLUDE FINAL ASSEMBLY, DISTRIBUTION, OR OTHER NON-PARTS COSTS.

FOR THIS VEHICLE: FINAL ASSEMBLY POINT: SPRING HILL, TN U.S.A.

COUNTRY OF ORIGIN: ENGINE: UNITED STATES TRANSMISSION: UNITED STATES

© 2019 General Motors LLC. GM, the GM logo, and OnStar are trademarks of General Motors.

ORDER NO. 4000000000 SALES CODE E

SALES CODE CODE 000000

VEHICLE NO. 000000

FINAL ASSEMBLY: SPRING HILL, TN, U.S.A.

VIN 1GYKNDR57LZ121480

DEALER TO WHOM DELIVERED: RICK BOKMAN, INC.

10119 E STATE ST CLEON, NY 14760-3811



UL

1GA0728242

## 083 Monroney Label Photograph

**APPENDIX B**  
**VEHICLE AND DUMMY RESPONSE DATA PLOTS**

## TABLE OF DATA PLOTS

No.	List of Data Plots Provided in the Test Report	Page
1	Driver Head X Acceleration vs. Time Primary	B-5
2	Driver Head Y Acceleration vs. Time Primary	B-5
3	Driver Head Z Acceleration vs. Time Primary	B-5
4	Driver Head Resultant Acceleration vs. Time Primary	B-5
5	Driver Chest X Deflection vs. Time	B-6
6	Driver Chest X Acceleration vs. Time Primary	B-7
7	Driver Chest Y Acceleration vs. Time Primary	B-7
8	Driver Chest Z Acceleration vs. Time Primary	B-7
9	Driver Chest Resultant Acceleration vs. Time Primary	B-7
10	Driver Upper Neck Force X vs. Time	B-8
11	Driver Upper Neck Force Z vs. Time	B-8
12	Driver Upper Neck Moment Y vs. Time	B-8
13	Driver Nij vs. Time	B-9
14	Driver Left Femur Force vs. Time	B-10
15	Driver Right Femur Force vs. Time	B-10
16	Passenger Head X Acceleration vs. Time Primary	B-11
17	Passenger Head Y Acceleration vs. Time Primary	B-11
18	Passenger Head Z Acceleration vs. Time Primary	B-11
19	Passenger Head Resultant Acceleration vs. Time Primary	B-11
20	Passenger Chest X Deflection vs. Time	B-12
21	Passenger Chest X Acceleration vs. Time Primary	B-13
22	Passenger Chest Y Acceleration vs. Time Primary	B-13
23	Passenger Chest Z Acceleration vs. Time Primary	B-13
24	Passenger Chest Resultant Acceleration vs. Time Primary	B-13
25	Passenger Upper Neck Force X vs. Time	B-14
26	Passenger Upper Neck Force Z vs. Time	B-14
27	Passenger Upper Neck Moment Y vs. Time	B-14
28	Passenger Nij vs. Time	B-15
29	Passenger Left Femur Force vs. Time	B-16
30	Passenger Right Femur Force vs. Time	B-16



The following additional dummy and vehicle response data can be found in the R & D section of the NHTSA website at: [www.nhtsa.gov](http://www.nhtsa.gov).

Driver Head Acceleration X Redundant  
Driver Head Acceleration Y Redundant  
Driver Head Acceleration Z Redundant  
Driver Upper Neck Force Y  
Driver Upper Neck Moment X  
Driver Upper Neck Moment Z  
Driver Chest X Acceleration Redundant  
Driver Chest Y Acceleration Redundant  
Driver Chest Z Acceleration Redundant  
Driver Pelvis X  
Driver Pelvis Y  
Driver Pelvis Z  
Driver Pelvis Resultant  
Driver Left Femur Redundant  
Driver Right Femur Redundant  
Driver Left Upper Tibia Moment X  
Driver Left Upper Tibia Moment Y  
Driver Left Upper Tibia Force Z  
Driver Left Lower Tibia Moment X  
Driver Left Lower Tibia Moment Y  
Driver Left Lower Tibia Force Z  
Driver Right Upper Tibia Moment X  
Driver Right Upper Tibia Moment Y  
Driver Right Upper Tibia Force Z  
Driver Right Lower Tibia Moment X  
Driver Right Lower Tibia Moment Y  
Driver Right Lower Tibia Force Z  
Driver Left Foot Fore Z  
Driver Left Foot Aft X  
Driver Left Foot Aft Z  
Driver Right Foot Fore Z  
Driver Right Foot Aft X  
Driver Right Foot Aft Z  
Driver Shoulder Belt Force  
Driver Lap Belt Force

Driver Head Angular Velocity X  
Driver Head Angular Velocity Y  
Driver Head Angular Velocity Z  
Passenger Head Acceleration X Redundant  
Passenger Head Acceleration Y Redundant  
Passenger Head Acceleration Z Redundant  
Passenger Upper Neck Force Y  
Passenger Upper Neck Moment X  
Passenger Upper Neck Moment Z  
Passenger Chest X Acceleration Redundant  
Passenger Chest Y Acceleration Redundant  
Passenger Chest Z Acceleration Redundant  
Passenger Pelvis X  
Passenger Pelvis Y  
Passenger Pelvis Z  
Passenger Pelvis Resultant  
Passenger Left Femur Redundant  
Passenger Right Femur Redundant  
Passenger Left Upper Tibia Moment X  
Passenger Left Upper Tibia Moment Y  
Passenger Left Upper Tibia Force Z  
Passenger Left Lower Tibia Moment X  
Passenger Left Lower Tibia Moment Y  
Passenger Left Lower Tibia Force Z  
Passenger Right Upper Tibia Moment X  
Passenger Right Upper Tibia Moment Y  
Passenger Right Upper Tibia Force Z  
Passenger Right Lower Tibia Moment X  
Passenger Right Lower Tibia Moment Y  
Passenger Right Lower Tibia Force Z  
Passenger Left Foot Fore Z  
Passenger Left Foot Aft X  
Passenger Left Foot Aft Z  
Passenger Right Foot Fore Z  
Passenger Right Foot Aft X  
Passenger Right Foot Aft Z  
Passenger Shoulder Belt Force  
Passenger Lap Belt Force

Passenger Head Angular Velocity X  
Passenger Head Angular Velocity Y  
Passenger Head Angular Velocity Z  
Left Rear Seat Crossmember X  
Left Rear Seat Crossmember Z  
Right Rear Seat Crossmember X  
Right Rear Seat Crossmember Z  
Left Rear Seat Crossmember X Redundant  
Right Rear Seat Crossmember X Redundant  
Vehicle Engine Top X  
Vehicle Engine Bottom X  
Load Cell Barrier Forces and Moments



# NHTSA


Test Lab: CTF

Test Number: 191212 (M20200106)

Test Date: 12/12/2019

Position #1 Hybrid III Mid-Sized Adult Male Dummy (037)

Position #2 Hybrid III Small Adult Female (EB7513)

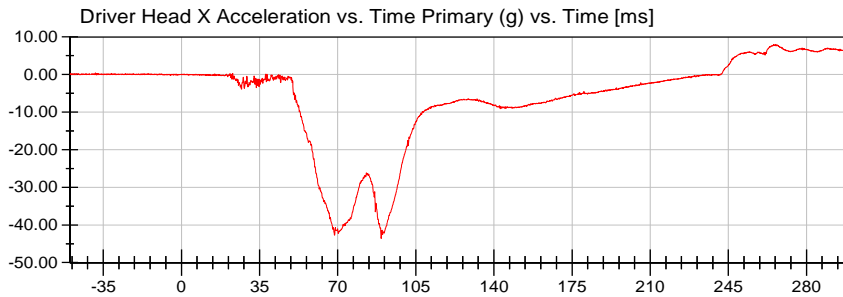


**<Max>**

7.98 g at 266.08 ms

**<Min>**

-43.61 g at 89.52 ms

CFC\_1000

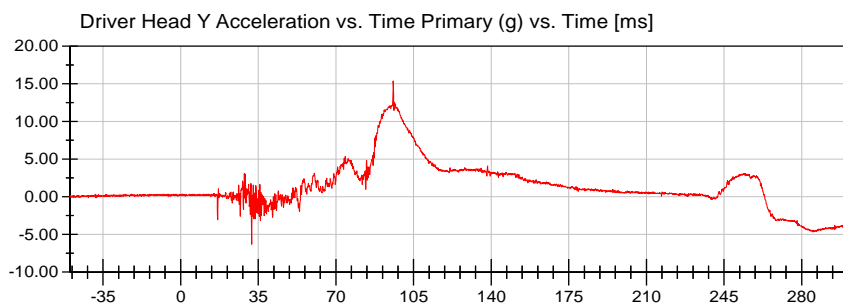


**<Max>**

15.38 g at 95.84 ms

**<Min>**

-6.30 g at 32.00 ms

CFC\_1000

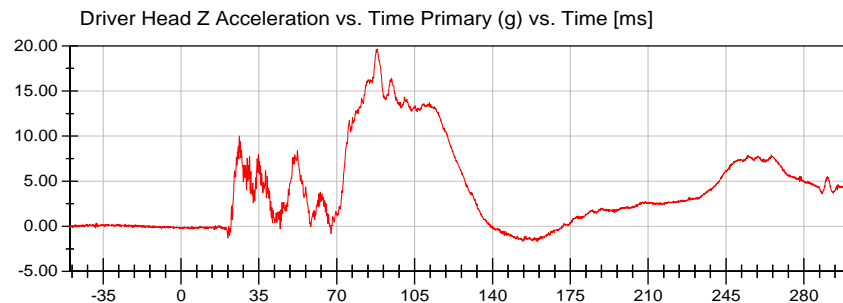


**<Max>**

19.66 g at 88.32 ms

**<Min>**

-1.67 g at 153.44 ms

CFC\_1000

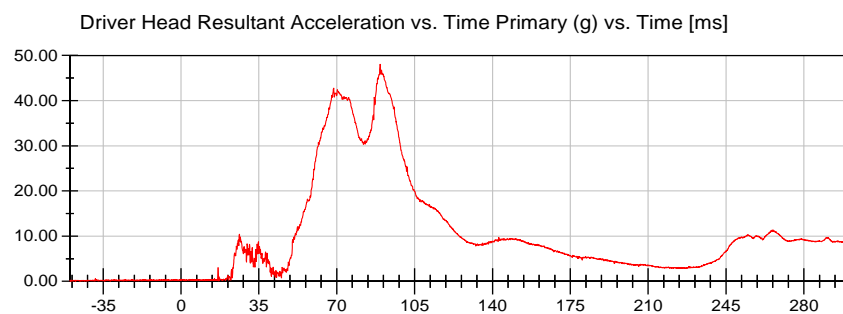

**<Max>**

48.04 g at 89.52 ms

**<Min>**

0.03 g at -49.12 ms

CFC\_1000



# NHTSA


Test Lab: CTF

Test Number: 191212 (M20200106)

Test Date: 12/12/2019

Position #1 Hybrid III Mid-Sized Adult Male Dummy (037)

Position #2 Hybrid III Small Adult Female (EB7513)

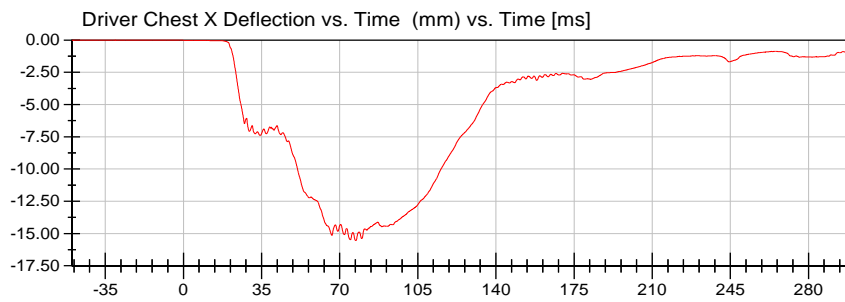

**<Max>**

0.00 mm at -30.56 ms

**<Min>**

-15.55 mm at 77.28 ms

CFC\_600



# NHTSA


Test Lab: CTF

Test Number: 191212 (M20200106)

Test Date: 12/12/2019

Position #1 Hybrid III Mid-Sized Adult Male Dummy (037)

Position #2 Hybrid III Small Adult Female (EB7513)

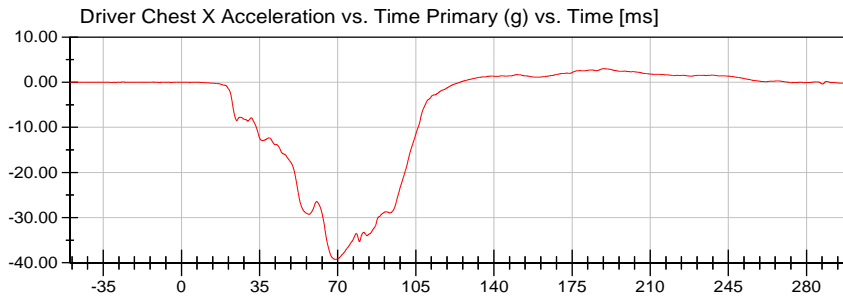


**<Max>**

2.97 g at 189.20 ms

**<Min>**

-39.24 g at 69.04 ms

CFC\_180

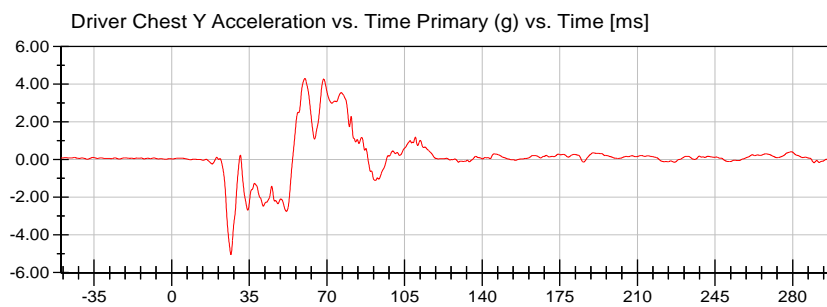


**<Max>**

4.30 g at 60.08 ms

**<Min>**

-5.04 g at 26.72 ms

CFC\_180

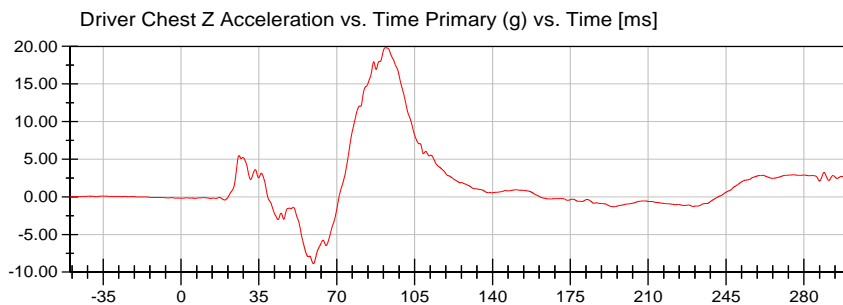


**<Max>**

19.84 g at 92.00 ms

**<Min>**

-8.87 g at 59.52 ms

CFC\_180

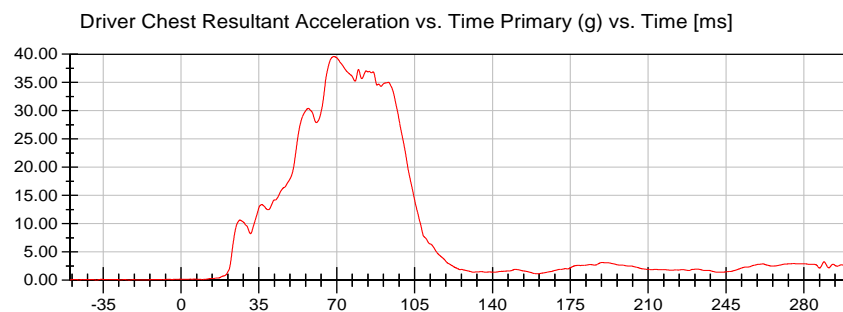

**<Max>**

39.60 g at 68.72 ms

**<Min>**

0.03 g at -37.92 ms

CFC\_180





# NHTSA


Test Lab: CTF

Test Number: 191212 (M20200106)

Test Date: 12/12/2019

Position #1 Hybrid III Mid-Sized Adult Male Dummy (037)

Position #2 Hybrid III Small Adult Female (EB7513)

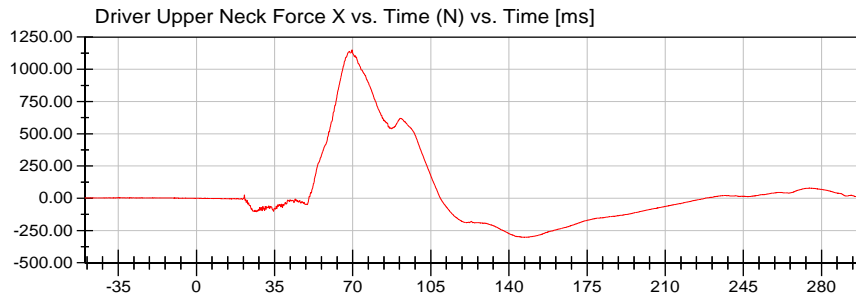


**<Max>**

1,150.21 N at 69.68 ms

**<Min>**

-302.77 N at 146.88 ms

CFC\_1000

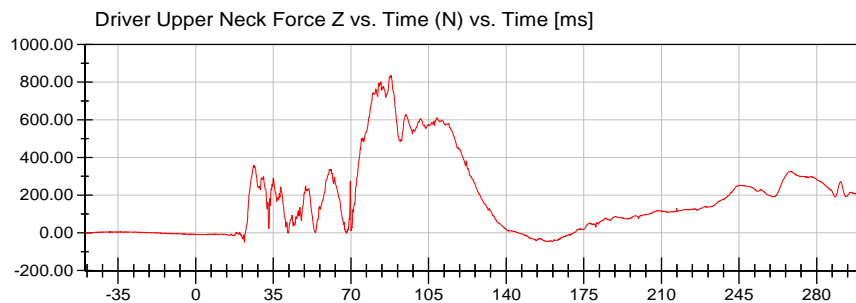


**<Max>**

837.13 N at 88.08 ms

**<Min>**

-49.31 N at 21.92 ms

CFC\_1000

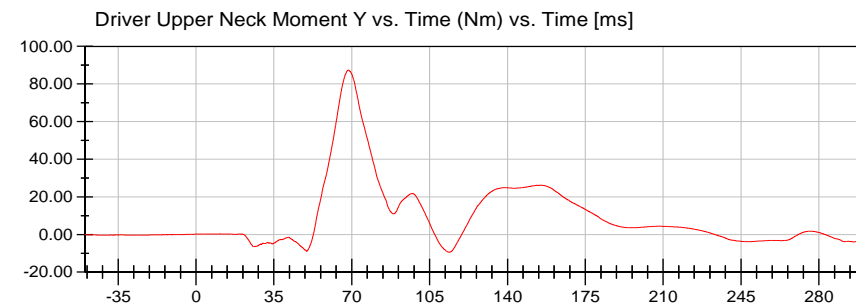

**<Max>**

87.37 Nm at 68.48 ms

**<Min>**

-9.41 Nm at 113.68 ms

CFC\_600






# 2020 Cadillac XT5 SUV NCAP 35 mph Frontal Impact Neck Injury Predictor (NIJ)

Date: 12/12/2019  
Time: 14:42

Customer: NHTSA



Test Number: M20200106

Test Orientation = Frontal  
Fzc(Tension) = 6806  
Fzc(Compression) = 6160  
Myc(Extension) = 135  
Myc(Flexion) = 310

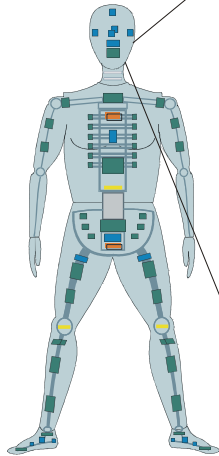


Dummy: HIII 50th Male  
Seating Position:  
Driver


NIJ Source Code: (Fz/Fzc)+(Myc/Myc)




TRC Inc. Test Lab: CTF  
Test Number: 191212




Max [NTE] 0.1411 at 113.52 ms

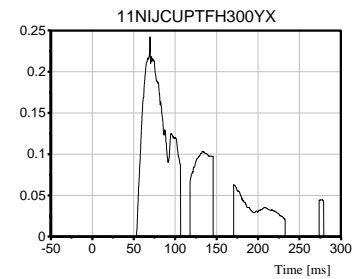

Max [NTF] 0.2420 at 69.68 ms



Max [NCE] 0.0088 at 41.76 ms

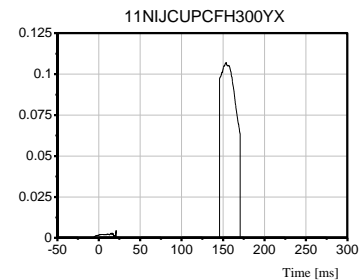

Max [NCF] 0.1071 at 153.68 ms

# NHTSA


Test Lab: CTF

Test Number: 191212 (M20200106)

Test Date: 12/12/2019

Position #1 Hybrid III Mid-Sized Adult Male Dummy (037)

Position #2 Hybrid III Small Adult Female (EB7513)

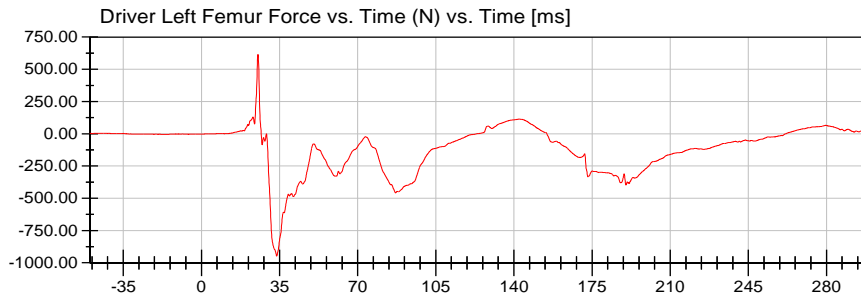


**<Max>**

615.23 N at 25.36 ms

**<Min>**

-948.68 N at 33.76 ms

CFC\_600

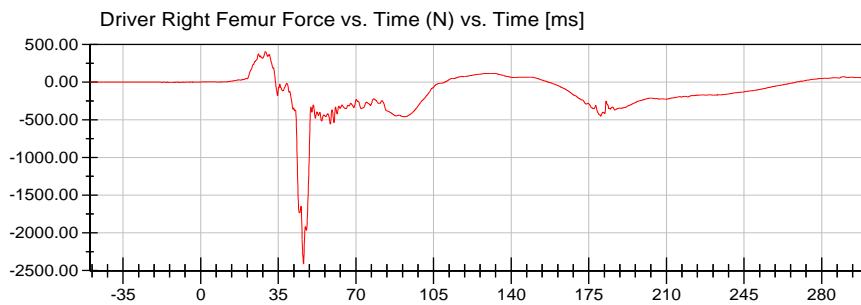

**<Max>**

407.65 N at 29.20 ms

**<Min>**

-2,408.81 N at 46.40 ms

CFC\_600





# NHTSA


Test Lab: CTF

Test Number: 191212 (M20200106)

Test Date: 12/12/2019

Position #1 Hybrid III Mid-Sized Adult Male Dummy (037)

Position #2 Hybrid III Small Adult Female (EB7513)

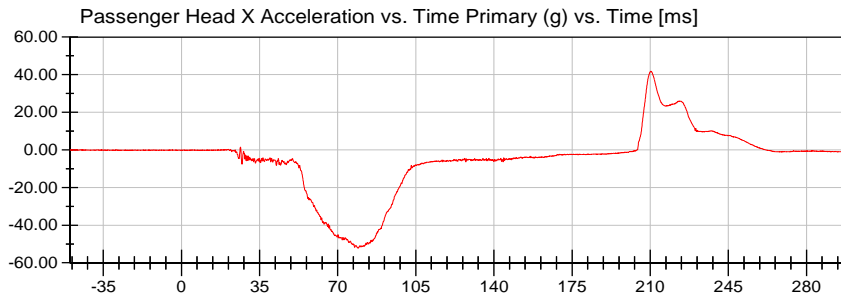


**<Max>**

41.85 g at 210.24 ms

**<Min>**

-52.28 g at 79.28 ms

CFC\_1000

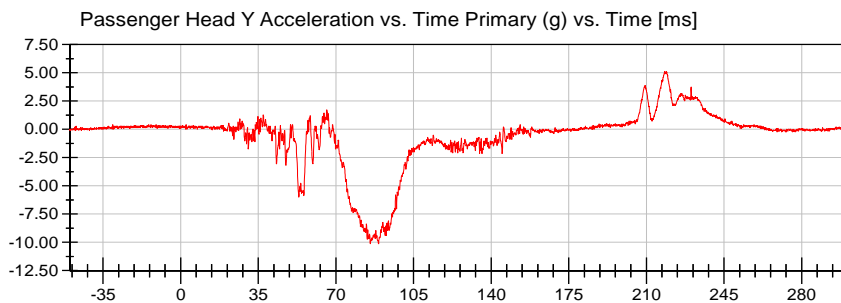


**<Max>**

5.12 g at 218.24 ms

**<Min>**

-10.12 g at 85.52 ms

CFC\_1000

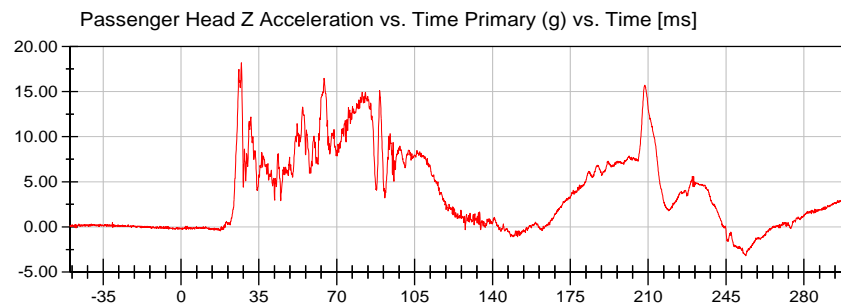


**<Max>**

18.17 g at 27.12 ms

**<Min>**

-3.18 g at 253.84 ms

CFC\_1000

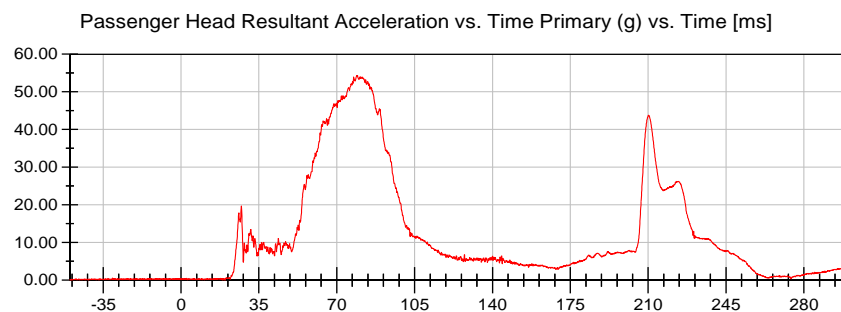

**<Max>**

54.39 g at 79.28 ms

**<Min>**

0.06 g at 19.84 ms

CFC\_1000



# NHTSA


Test Lab: CTF

Test Number: 191212 (M20200106)

Test Date: 12/12/2019

Position #1 Hybrid III Mid-Sized Adult Male Dummy (037)

Position #2 Hybrid III Small Adult Female (EB7513)

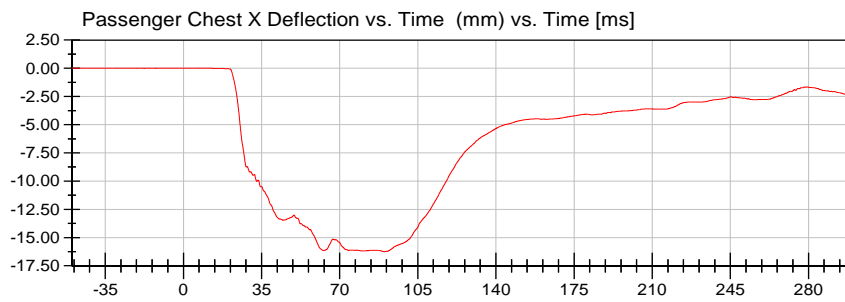

**<Max>**

0.01 mm at 6.32 ms

**<Min>**

-16.24 mm at 89.68 ms

CFC\_600



# NHTSA


Test Lab: CTF

Test Number: 191212 (M20200106)

Test Date: 12/12/2019

Position #1 Hybrid III Mid-Sized Adult Male Dummy (037)

Position #2 Hybrid III Small Adult Female (EB7513)

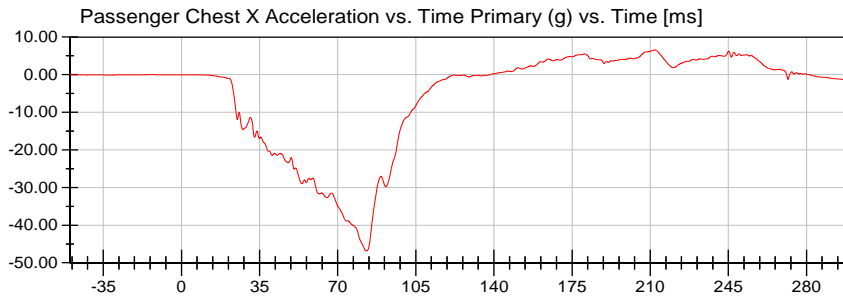


**<Max>**

6.56 g at 212.08 ms

**<Min>**

-46.87 g at 82.80 ms

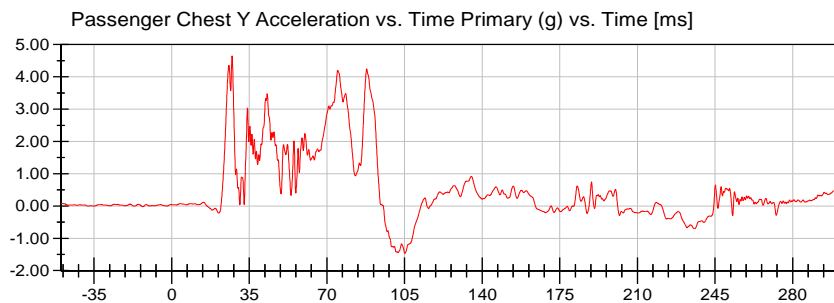


**<Max>**

4.65 g at 27.28 ms

**<Min>**

-1.47 g at 105.12 ms

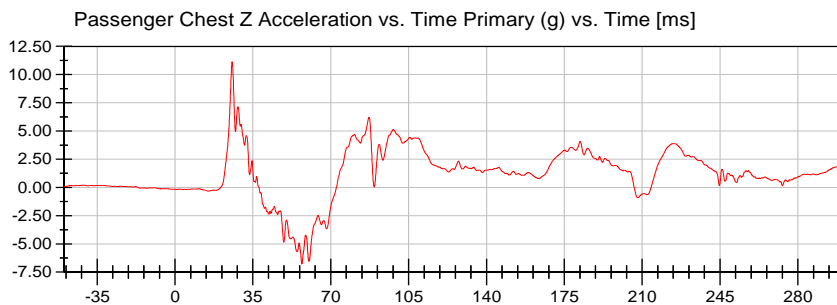


**<Max>**

11.14 g at 25.68 ms

**<Min>**

-6.80 g at 57.04 ms

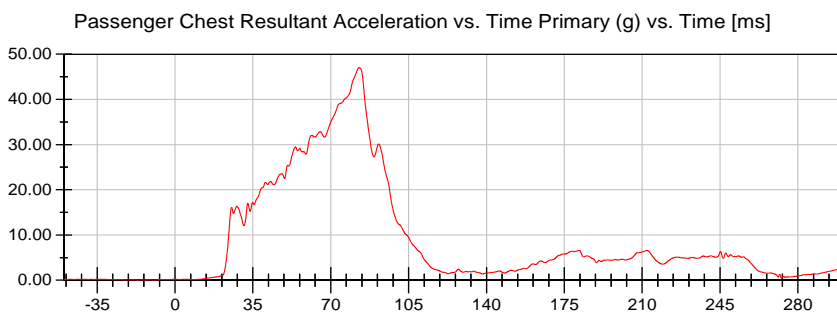

**<Max>**

47.06 g at 82.80 ms

**<Min>**

0.03 g at -16.64 ms



# NHTSA


Test Lab: CTF

Test Number: 191212 (M20200106)

Test Date: 12/12/2019

Position #1 Hybrid III Mid-Sized Adult Male Dummy (037)

Position #2 Hybrid III Small Adult Female (EB7513)

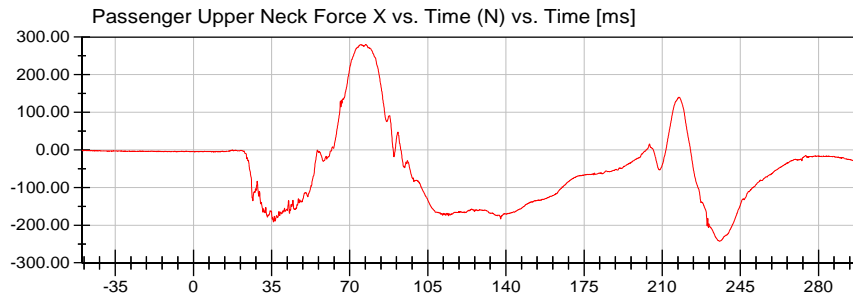


**<Max>**

280.21 N at 75.04 ms

**<Min>**

-242.89 N at 235.76 ms

CFC\_1000

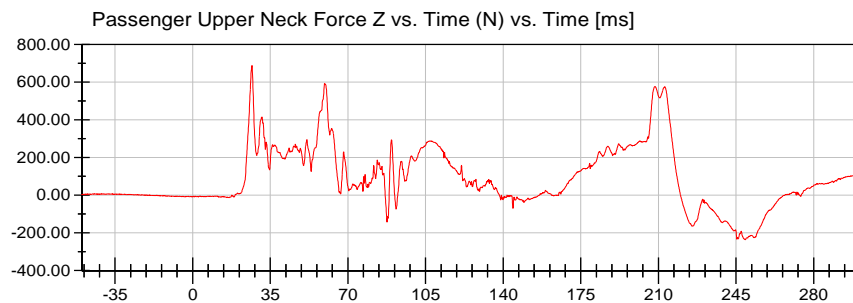


**<Max>**

688.02 N at 26.72 ms

**<Min>**

-235.91 N at 249.12 ms

CFC\_1000

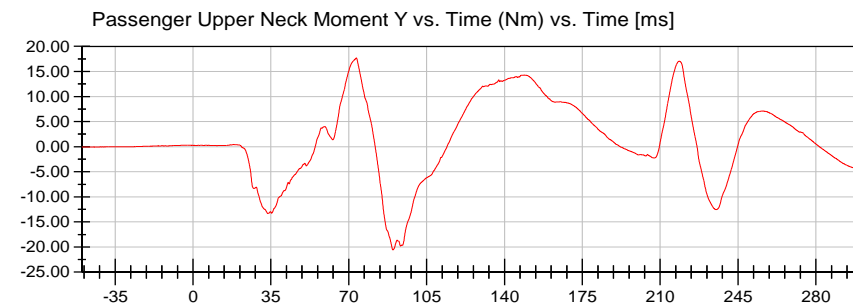

**<Max>**

17.69 Nm at 73.44 ms

**<Min>**

-20.57 Nm at 89.92 ms

CFC\_600








# 2020 Cadillac XT5 SUV NCAP 35 mph Frontal Impact Neck Injury Predictor (NIJ)

Date: 12/12/2019  
Time: 14:42



Customer: NHTSA  
Test Number: M20200106

Test Orientation = Frontal  
Fzc(Tension) = 4287  
Fzc(Compression) = 3880  
Myc(Extension) = 67  
Myc(Flexion) = 155

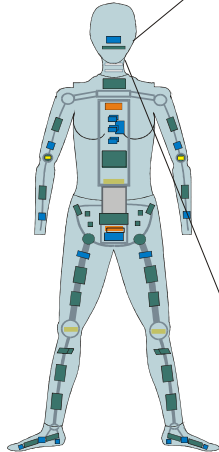


Dummy: HIII 5th Female  
Seating Position:  
Right Front Passenger


NIJ Source Code: (Fz/Fzc)+(Myc/Myc)




TRC Inc. Test Lab: CTF  
Test Number: 191212




Max [NTE] 0.3708 at 89.68 ms

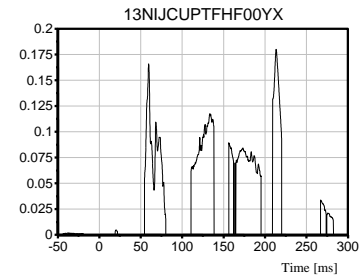

Max [NTF] 0.1799 at 213.36 ms



Max [NCE] 0.3182 at 88.16 ms

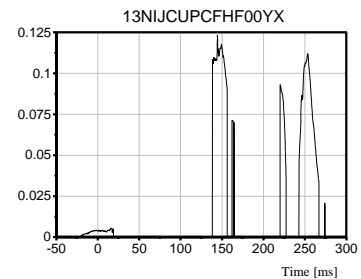

Max [NCF] 0.1232 at 144.48 ms

# NHTSA

Test Lab: CTF


Test Number: 191212 (M20200106)

Test Date: 12/12/2019

Position #1 Hybrid III Mid-Sized Adult Male Dummy (037)

Position #2 Hybrid III Small Adult Female (EB7513)

Passenger Left Femur Force vs. Time (N) vs. Time [ms]

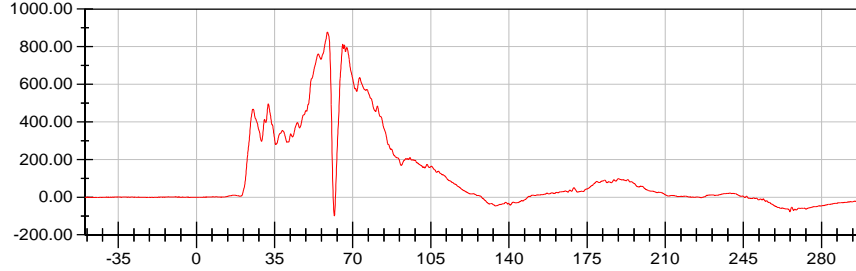

**<Max>**


878.12 N at 58.64 ms

**<Min>**

-98.69 N at 61.76 ms

CFC\_600

Passenger Right Femur Force vs. Time (N) vs. Time [ms]

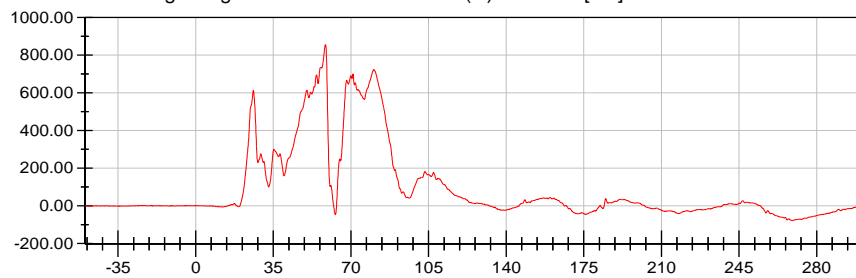

**<Max>**

855.81 N at 58.56 ms

**<Min>**

-77.15 N at 268.96 ms

CFC\_600



**APPENDIX C**  
**DUMMY CALIBRATION AND PERFORMANCE VERIFICATION**

**Pre-Test Calibration Sheets**

**Driver S/N 037**



**Transportation Research Center Inc.**  
**572E HIII 50th Male Dummy**  
**External Dimensions**  
**Serial No. 037**  
**Calibration No. 64**

Symbol	Description	Specification	Results	Pass
		mm	mm	
A	Total Sitting Height	878.8 - 889.0	880	Yes
B	Shoulder Pivot Height	505.5 - 520.7	510	Yes
C	H-Point Height	83.8 - 88.9	85	Yes
D	H-Point From Seatback	134.6 - 139.7	137	Yes
E	Shoulder Pivot From Backline	83.8 - 94.0	91	Yes
F	Thigh Clearance	139.7 - 154.9	147	Yes
G	Back Of Elbow To Wrist Pivot	289.6 - 304.8	295	Yes
H	Skull Cap To Backline	40.6 - 45.7	45	Yes
I	Shoulder-Elbow Length	330.2 - 345.4	337	Yes
J	Elbow Rest Height	190.5 - 210.8	199	Yes
K	Buttock Knee Length	579.1 - 604.5	601	Yes
L	Popliteal Height	429.3 - 454.7	440	Yes
M	Knee Pivot Height	485.1 - 500.4	494	Yes
N	Buttock Popliteal Length	452.1 - 477.5	470	Yes
O	Chest Depth	213.4 - 228.6	223	Yes
P	Foot Length	251.5 - 266.7	264	Yes
V	Shoulder Breadth	421.6 - 436.9	425	Yes
W	Foot Breadth	91.4 - 106.7	96	Yes
Y	Chest Circumference	970.3 - 1000.8	991	Yes
Z	Waist Circumference	835.7 - 866.1	865	Yes
AA	Location For Chest Circumference	429.3 - 434.3	432	Yes
BB	Location For Waist Circumference	226.1 - 231.1	229	Yes

## Transportation Research Center Inc.

Front Head Drop

HIII 50th Serial No. 037 Certification No. 64-1

Test Date: 12/3/2019

Test Parameter	Specification	Test Results	Pass
Temperature	20.6 - 22.2 °C	21.3 °C	Yes
Relative Humidity	10 - 70 %	40 %	Yes
Peak Head Resultant Acceleration	225 - 275 g	245.3 g	Yes
Peak Head Lateral Acceleration	(-15) - 15 g	3.8 g	Yes
Is Acceleration Curve Unimodal within 10% of Peak?	< 10 %	1.01 %	Yes

**Test meets specifications.**

**Condition:** Used

**Comments:**

**Head Skin S/N:** N/A

Specification Source: CFR49 Part 572 Subpart E  
with Polarity in accordance with J211

Page 9 of 27

12.03.2019 09:51:18 577




## Transportation Research Center Inc.

Front Head Drop

HIII 50th Serial No. 037 Certification No. 64-1


Test Date: 12/3/2019

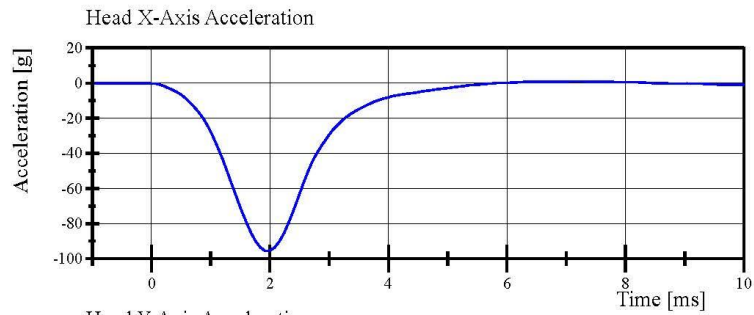

Filter Class: CFC\_1000

Max: 1.0 g at 7.1 ms


Min: -95.6 g at 1.9 ms

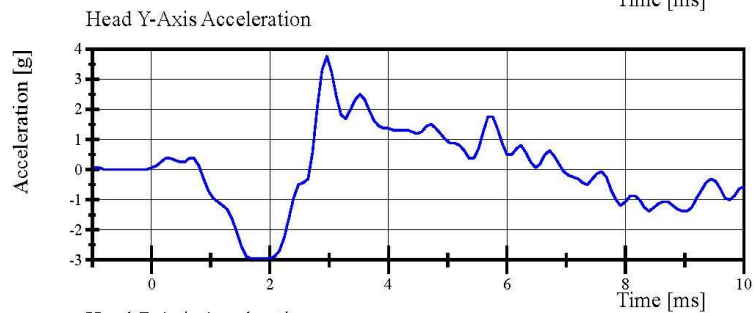

Filter Class: CFC\_1000

Max: 3.8 g at 3.0 ms


Min: -2.9 g at 1.7 ms

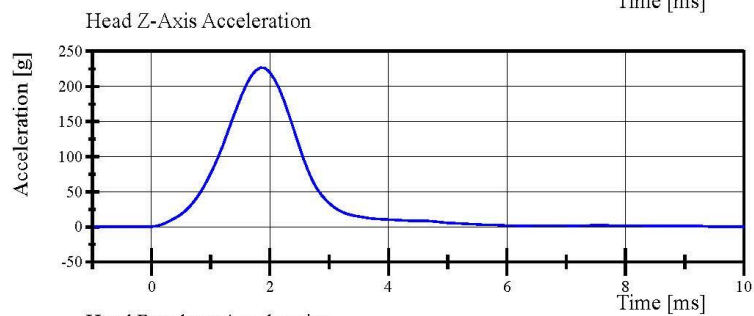

Filter Class: CFC\_1000

Max: 226.6 g at 1.8 ms

Min: -0.0 g at -1.0 ms

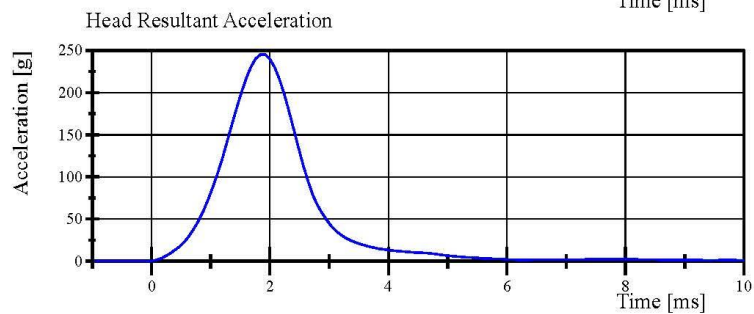

Filter Class: CFC\_1000

Max: 245.3 g at 1.9 ms

Min: 0.0 g at -0.2 ms

Specification Source: CFR49 Part 572 Subpart E  
with Polarity in accordance with J211

12.03.2019 09:51:53 577



## Transportation Research Center Inc.

Neck Flexion

HIII 50th Serial No. 037 Certification No. 64-1

Test Date: 12/3/2019

Test Parameter	Specification	Test Results	Pass
Temperature	20.6 - 22.2 °C	21.2 °C	Yes
Relative Humidity	10 - 70 %	39 %	Yes
Pendulum Velocity	6.89 - 7.13 m/s	6.910 m/s	Yes
Pendulum Acceleration Decay Crossing -5g	34 - 42 ms	39.4 ms	Yes
Pendulum Acceleration at 10ms	(-22.5) - (-27.5) g	-23.28 g	Yes
Pendulum Acceleration at 20ms	(-17.6) - (-22.6) g	-20.01 g	Yes
Pendulum Acceleration at 30ms	(-12.5) - (-18.5) g	-15.09 g	Yes
Pendulum Acceleration > 30ms	>= (-29.0) g	-15.09 g	Yes
Total Head D-Plane Rotation			
Peak	(-64) - (-78) °	-71.4 °	Yes
Time of Peak	57 - 64 ms	60.8 ms	Yes
Total Head D-Plane Rotation Decay to 0°	113 - 128 ms	120.4 ms	Yes
Total Neck Occipital Condyles Moment			
Peak	88.1 - 108.4 N·m	106.02 N·m	Yes
Time of Peak	47 - 58 ms	52.6 ms	Yes
Total Neck Occipital Condyles Moment Decay to 0 N·m	97 - 107 ms	99.0 ms	Yes

**Test meets specifications.**

**Condition:** Used

**Comments:**

**Neck S/N: 4728**

Specification Source: CFR49 Part 572 Subpart E  
with Polarity in accordance with J211

Page 11 of 27

12.03.2019 10:41:25 1841






## Transportation Research Center Inc.


Neck Flexion

HIII 50th Serial No. 037 Certification No. 64-1


Test Date: 12/3/2019

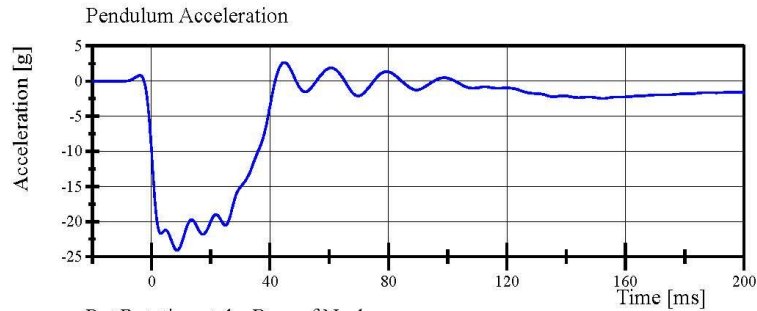


Filter Class: CFC\_60  
Max: 2.6 g at 44.9 ms  
Min: -24.1 g at 8.7 ms

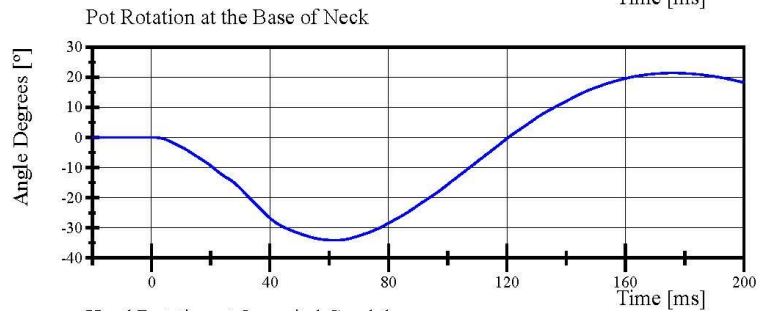

Filter Class: CFC\_60  
Max: 21.4 ° at 176.1 ms  
Min: -34.2 ° at 61.8 ms

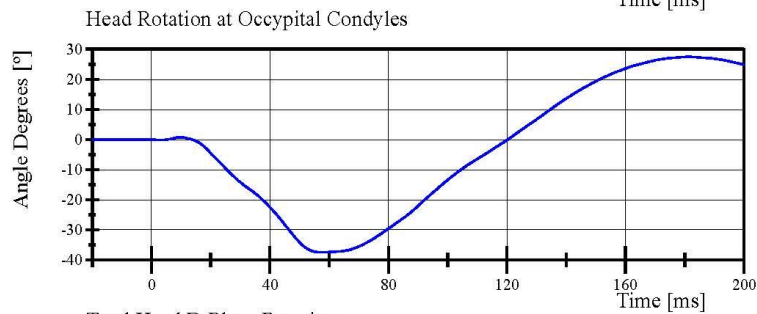

Filter Class: CFC\_60  
Max: 27.5 ° at 181.3 ms  
Min: -37.4 ° at 57.3 ms

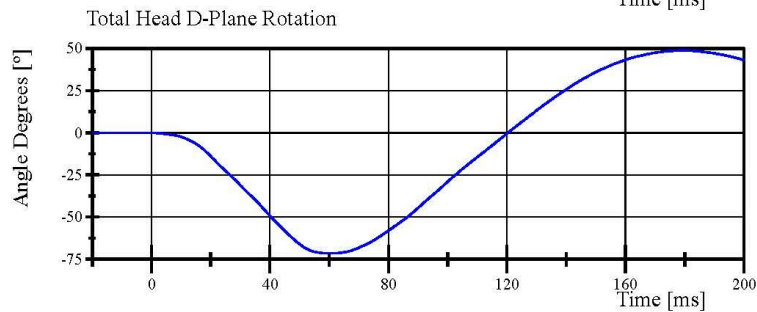

Filter Class: CFC\_60  
Max: 48.8 ° at 179.5 ms  
Min: -71.4 ° at 60.8 ms

Specification Source: CFR49 Part 572 Subpart E  
with Polarity in accordance with J211

12.03.2019 10:42:10 1841







## Transportation Research Center Inc.

Neck Flexion

HIII 50th Serial No. 037 Certification No. 64-1

Test Date: 12/3/2019

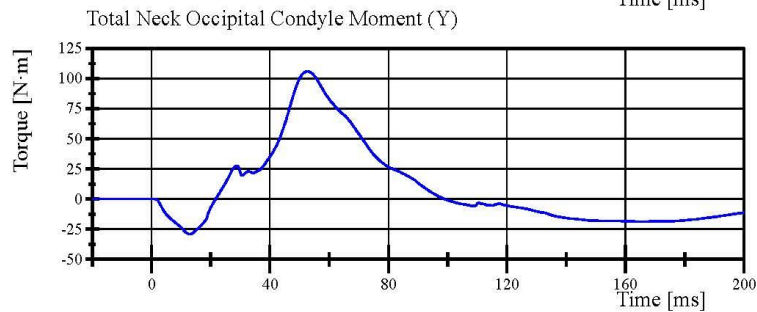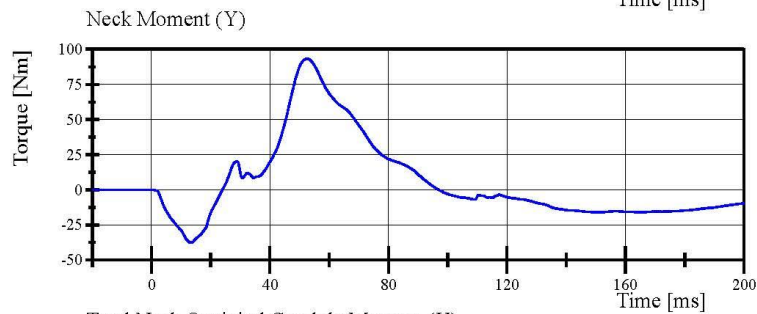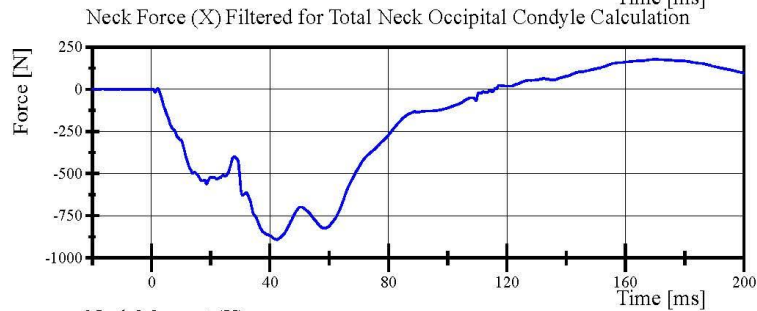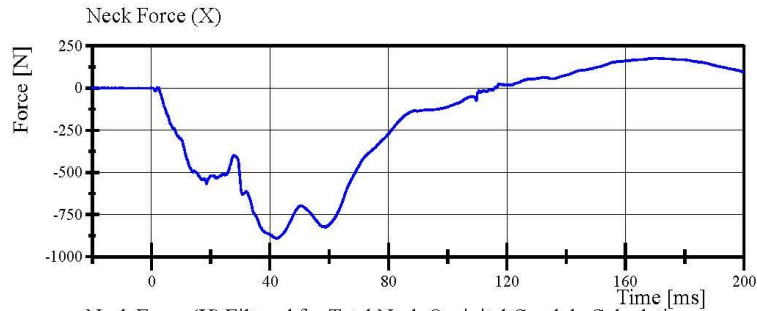

Specification Source: CFR49 Part 572 Subpart E  
with Polarity in accordance with J211

12.03.2019 10:42:10 1841



## Transportation Research Center Inc.

Neck Extension

HIII 50th Serial No. 037 Certification No. 64-1

Test Date: 12/3/2019

Test Parameter	Specification	Test Results	Pass
Temperature	20.6 - 22.2 °C	21.6 °C	Yes
Relative Humidity	10 - 70 %	41 %	Yes
Pendulum Velocity	(-5.95) - (-6.18) m/s	-5.955 m/s	Yes
Pendulum Acceleration Decay Crossing 5g	38 - 46 ms	39.3 ms	Yes
Pendulum Acceleration at 10ms	17.2 - 21.2 g	18.57 g	Yes
Pendulum Acceleration at 20ms	14.0 - 19.0 g	17.07 g	Yes
Pendulum Acceleration at 30ms	11.0 - 16.0 g	15.16 g	Yes
Pendulum Acceleration > 30ms	<= 22.0 g	15.16 g	Yes
Total Head D-Plane Rotation			
Peak	81 - 106 °	98.9 °	Yes
Time of Peak	72 - 82 ms	77.5 ms	Yes
Total Head D-Plane Rotation Decay to 0°	147 - 174 ms	159.4 ms	Yes
Total Neck Occipital Condyles Moment			
Peak	(-52.9) - (-80) N·m	-69.73 N·m	Yes
Time of Peak	65 - 79 ms	72.2 ms	Yes
Total Neck Occipital Condyles Moment Decay to 0 N·m	120 - 148 ms	145.2 ms	Yes

**Test meets specifications.**

**Condition:** Used

**Comments:**

**Neck S/N: 4728**

Specification Source: CFR49 Part 572 Subpart E  
with Polarity in accordance with J211

Page 14 of 27

12.03.2019 11:07:00 1991




## Transportation Research Center Inc.


Neck Extension

HIII 50th Serial No. 037 Certification No. 64-1


Test Date: 12/3/2019

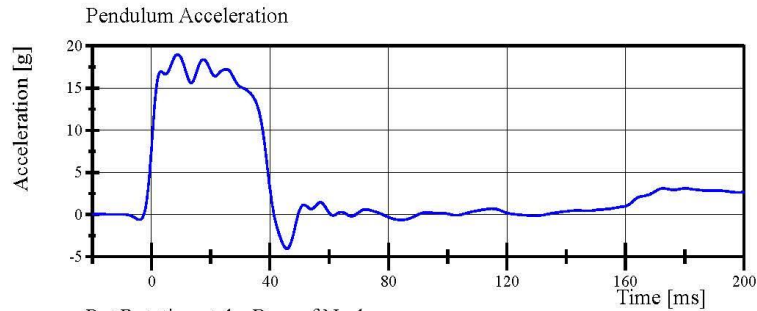


Filter Class: CFC\_60  
Max: 19.0 g at 8.8 ms  
Min: -4.0 g at 45.8 ms

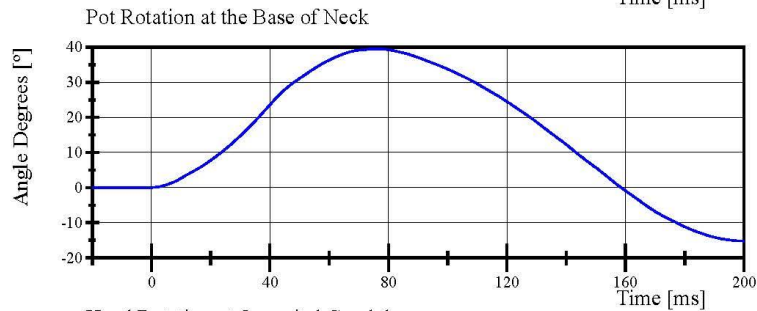

Filter Class: CFC\_60  
Max: 39.5 ° at 76.3 ms  
Min: -15.2 ° at 200.0 ms

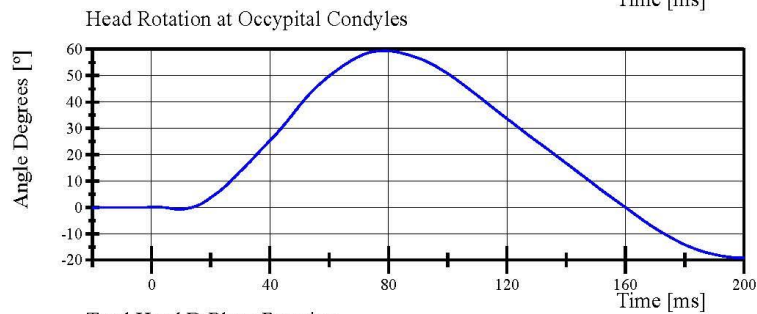

Filter Class: CFC\_60  
Max: 59.4 ° at 78.8 ms  
Min: -19.2 ° at 200.0 ms

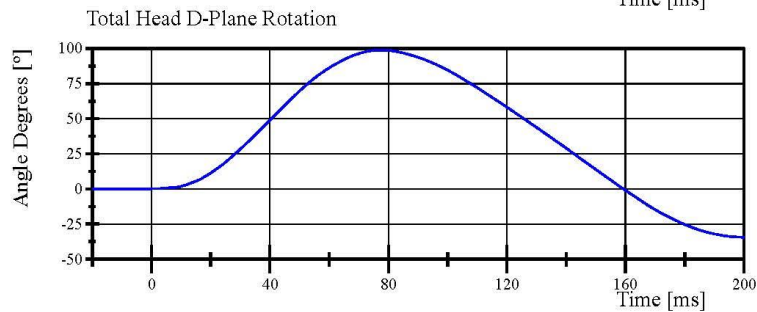

Filter Class: CFC\_60  
Max: 98.9 ° at 77.5 ms  
Min: -34.5 ° at 200.0 ms

Specification Source: CFR49 Part 572 Subpart E  
with Polarity in accordance with J211

12.03.2019 11:07:34 1991






## Transportation Research Center Inc.


Neck Extension

HIII 50th Serial No. 037 Certification No. 64-1


Test Date: 12/3/2019

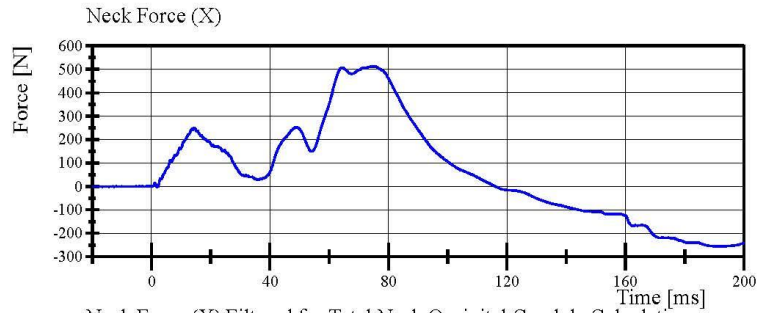


Filter Class: CFC\_1000  
Max: 513.2 N at 74.5 ms  
Min: -256.2 N at 190.4 ms

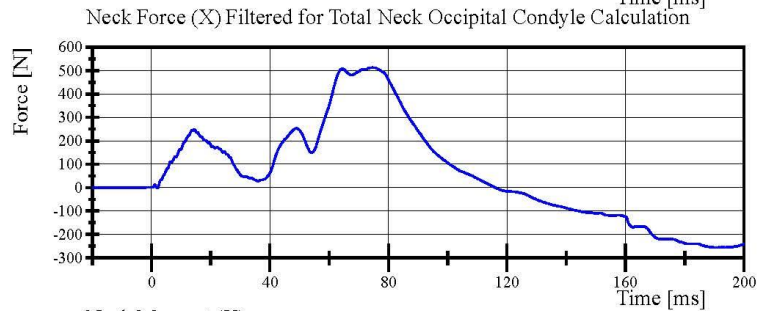

Filter Class: CFC\_600  
Max: 513.0 N at 74.6 ms  
Min: -255.8 N at 190.4 ms

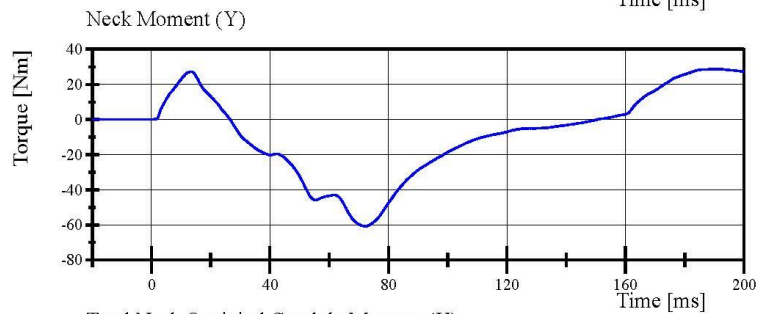

Filter Class: CFC\_600  
Max: 28.6 Nm at 191.7 ms  
Min: -60.8 Nm at 72.2 ms

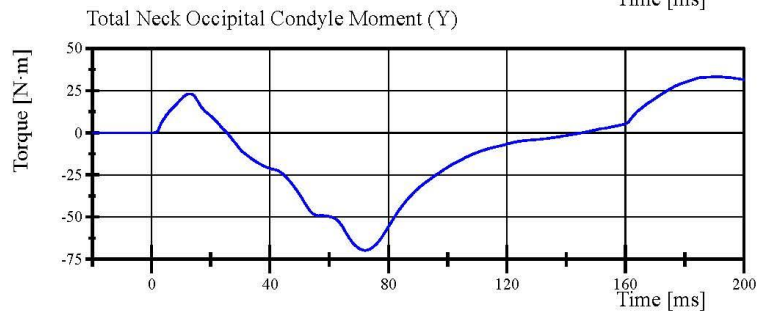

Filter Class: Without\_(Constar  
Max: 33.2 N·m at 191.8 ms  
Min: -69.7 N·m at 72.2 ms

Specification Source: CFR49 Part 572 Subpart E  
with Polarity in accordance with J211

12.03.2019 11:07:34 1991



## Transportation Research Center Inc.

Front Thorax

HIII 50th Serial No. 037 Certification No. 64-1

Test Date: 12/3/2019

Test Parameter	Specification	Test Results	Pass
Temperature	20.6 - 22.2 °C	21.4 °C	Yes
Relative Humidity	10 - 70 %	39 %	Yes
Probe Velocity	6.59 - 6.83 m/s	6.775 m/s	Yes
Probe Force Peak	(-5,160) - (-5,894) N	-5,591.6 N	Yes
Maximum Chest Compression	(-63.5) - (-72.6) mm	-66.59 mm	Yes
Internal Hysteresis	69 - 85 %	73.4 %	Yes

**Test meets specifications.**

**Condition:** Used

**Comments:**

**Jacket S/N: 2565**

**Rib Set S/N: 02033121A**

Specification Source: CFR49 Part 572 Subpart E  
with Polarity in accordance with J211

Page 17 of 27

12.03.2019 08:35:32 388




## Transportation Research Center Inc.

Front Thorax

HIII 50th Serial No. 037 Certification No. 64-1


Test Date: 12/3/2019

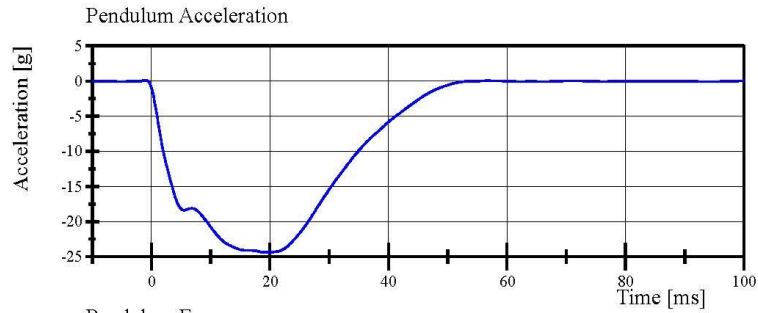

Filter Class: CFC\_180

Max: 0.1 g at -1.0 ms


Min: -24.4 g at 19.3 ms

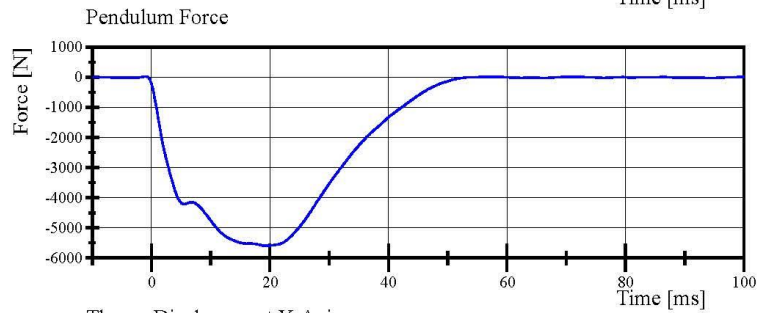

Filter Class: CFC\_180

Max: 27.2 N at -1.0 ms


Min: -5,591.6 N at 19.3 ms

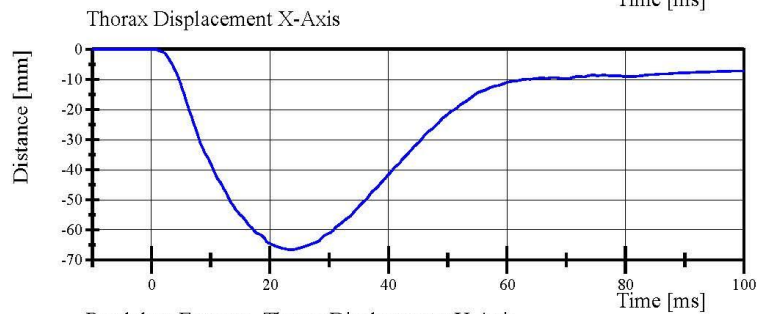

Filter Class: CFC\_600

Max: 0.0 mm at -6.3 ms

Min: -66.6 mm at 23.6 ms

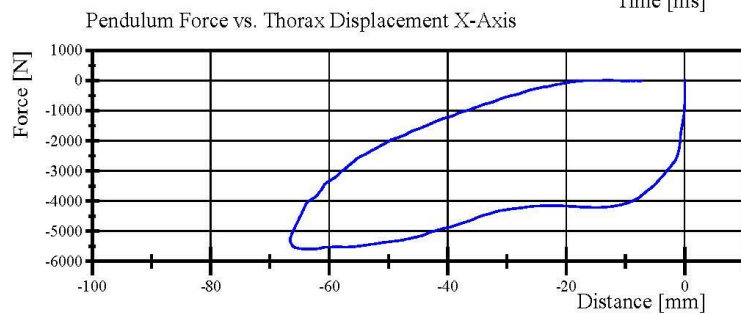

Filter Class: CFC\_180

Max: 27.2 N at -0.0 mm

Min: -5,591.6 N at -63.4 mm

Specification Source: CFR49 Part 572 Subpart E  
with Polarity in accordance with J211

12.03.2019 08:37:17 388





# Transportation Research Center Inc.

Hybrid III 50th Male Hip Range of Motion



Serial Number: 037 Date: 03-Dec-2019  
Side Tested: Left Hip Time: 10:22  
Test Number: 1

TEST PARAMETER	SPECIFICATION		TEST RESULTS		
Temperature	18.9	- 25.6	21.5	°C	Pass
Humidity	10	- 70	40	%	Pass
Moment at 30°	0	≤ 94.9	81.23	N-m	Pass
Angle at 203 Nm	40	- 50	46.13	deg	Pass
Average Velocity	5	- 10	7	deg/sec	Pass

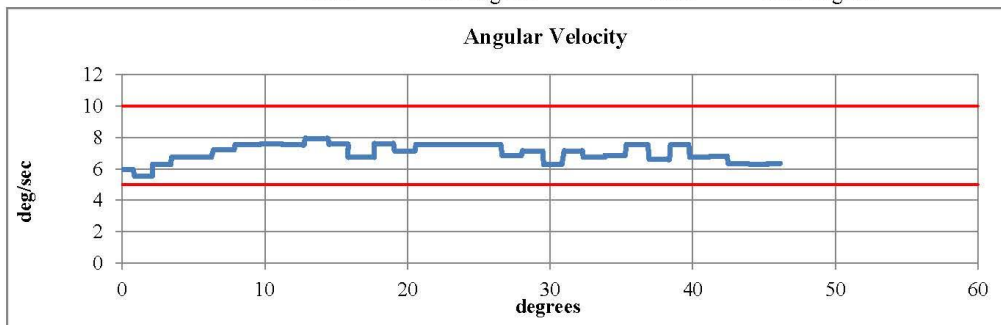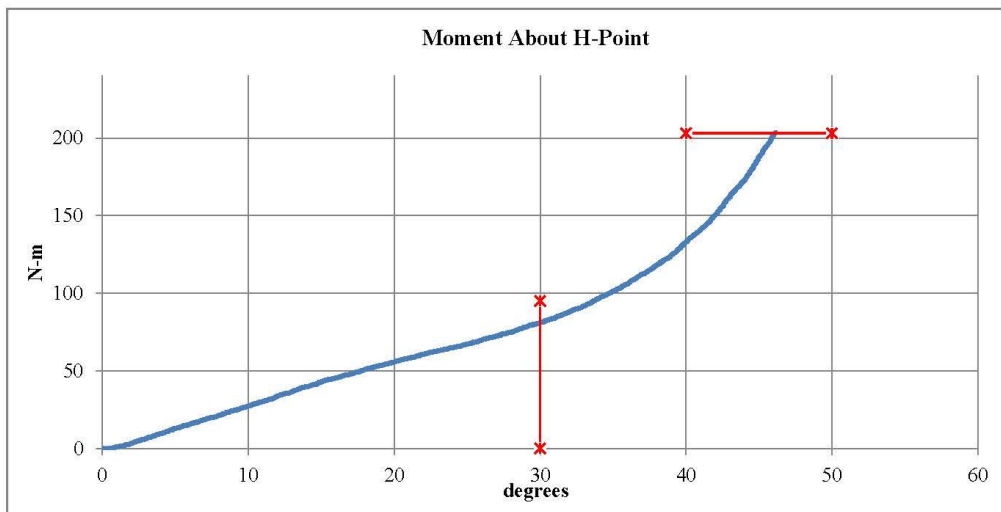

Comments:  
Pelvis Skin S/N: EK3565




# Transportation Research Center Inc.

Hybrid III 50th Male Hip Range of Motion




Serial Number: 037 Date: 03-Dec-2019  
Side Tested: Right Hip Time: 11:45  
Test Number: 1

TEST PARAMETER	SPECIFICATION		TEST RESULTS		
Temperature	18.9	- 25.6	21.2	°C	Pass
Humidity	10	- 70	39	%	Pass
Moment at 30°	0	≤ 94.9	86.88	N-m	Pass
Angle at 203 Nm	40	- 50	45.58	deg	Pass
Average Velocity	5	- 10	7.14	deg/sec	Pass

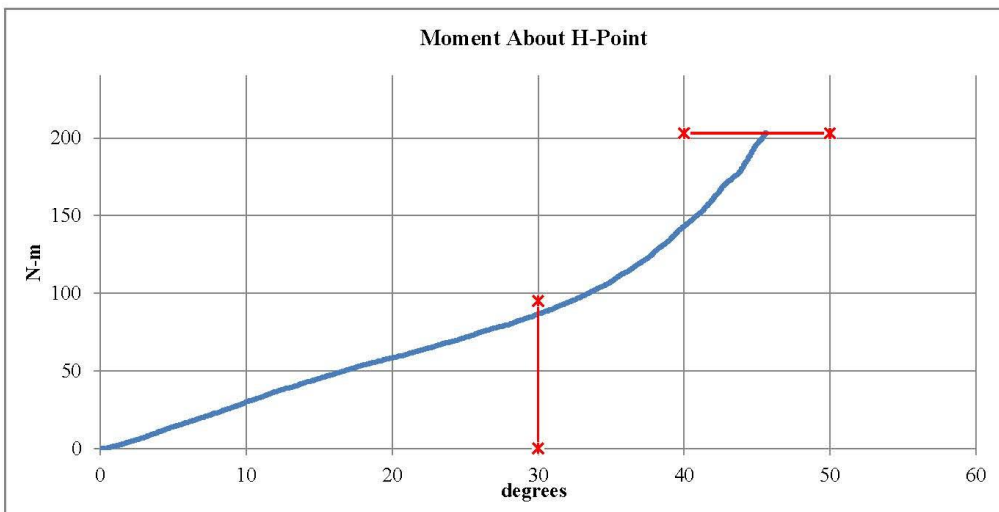

Max: 8.33 deg/sec Min: 5.55 deg/sec

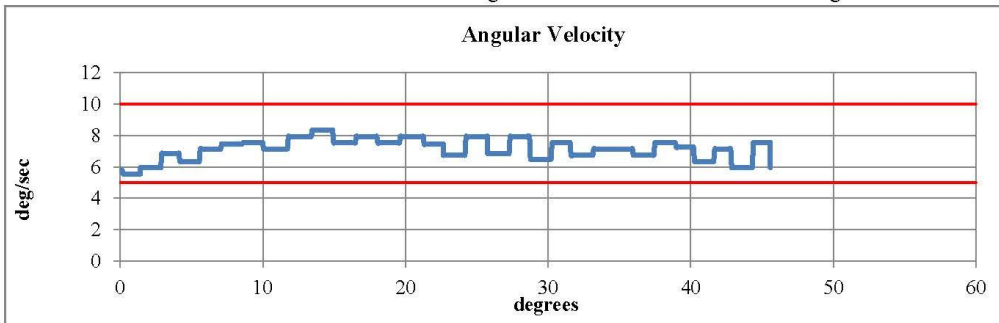

Comments:  
Pelvis Skin S/N: EK3565

## Transportation Research Center Inc.

Left Knee Femur Response Test  
HIII 50th Serial No. 037 Certification No. 64-1  
Test Date: 12/3/2019

Test Parameter	Specification	Test Results	Pass
Temperature	18.9 - 25.5 °C	21.4 °C	Yes
Relative Humidity	10 - 70 %	39 %	Yes
Probe Velocity	2.07 - 2.13 m/s	2.097 m/s	Yes
Peak Femur Force	(-4,715.2) - (-5,782.6) N	-5,746.15 N	Yes

**Test meets specifications.**

**Condition: Used**

**Comments:**

**Knee Skin S/N: 2672**

Specification Source: CFR49 Part 572 Subpart E  
with Polarity in accordance with J211


Page 21 of 27

12.03.2019 07:52:35 1850




## Transportation Research Center Inc.

Left Knee Femur Response Test  
HIII 50th Serial No. 037 Certification No. 64-1  
Test Date: 12/3/2019

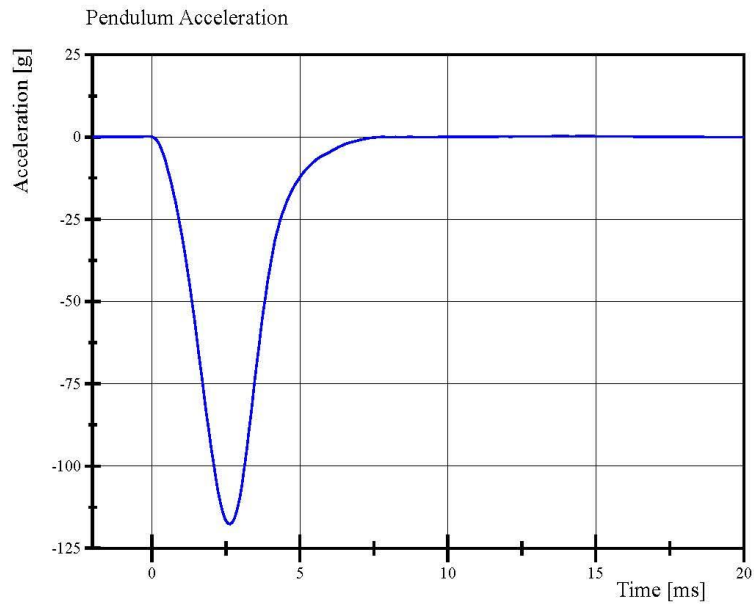

Filter Class: CFC\_600  
Max: 0.2 g at 14.6 ms  
Min: -117.7 g at 2.6 ms

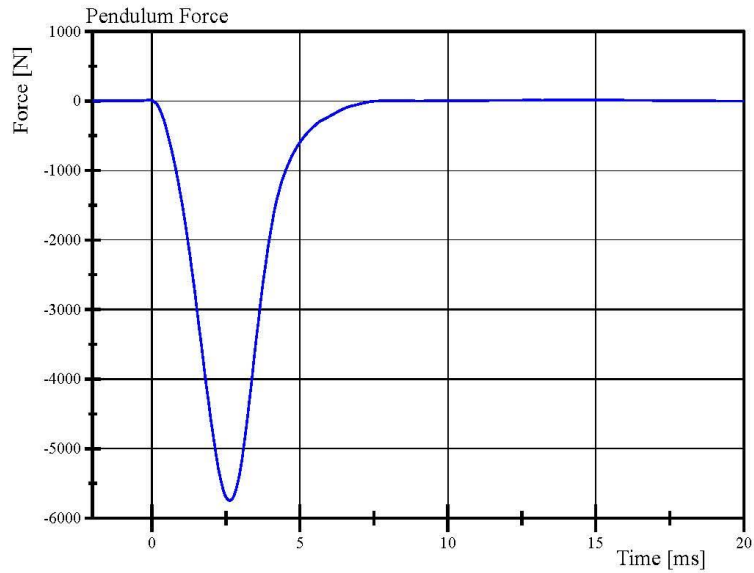

Filter Class: CFC\_600  
Max: 11.8 N at 14.6 ms  
Min: -5,746.1 N at 2.6 ms

Specification Source: CFR49 Part 572 Subpart E  
with Polarity in accordance with J211

12.03.2019 07:53:06 1850



Page 22 of 27

## Transportation Research Center Inc.

Right Knee Femur Response Test  
HIII 50th Serial No. 037 Certification No. 64-1  
Test Date: 12/3/2019

Test Parameter	Specification	Test Results	Pass
Temperature	18.9 - 25.5 °C	21.4 °C	Yes
Relative Humidity	10 - 70 %	40 %	Yes
Probe Velocity	2.07 - 2.13 m/s	2.096 m/s	Yes
Peak Femur Force	(-4,715.2) - (-5,782.6) N	-5,534.47 N	Yes

**Test meets specifications.**

**Condition: Used**

**Comments:**

**Knee Skin S/N: 1248**

Specification Source: CFR49 Part 572 Subpart E  
with Polarity in accordance with J211

Page 23 of 27


12.03.2019 08:01:13 1845






## Transportation Research Center Inc.

Right Knee Femur Response Test  
HIII 50th Serial No. 037 Certification No. 64-1  
Test Date: 12/3/2019

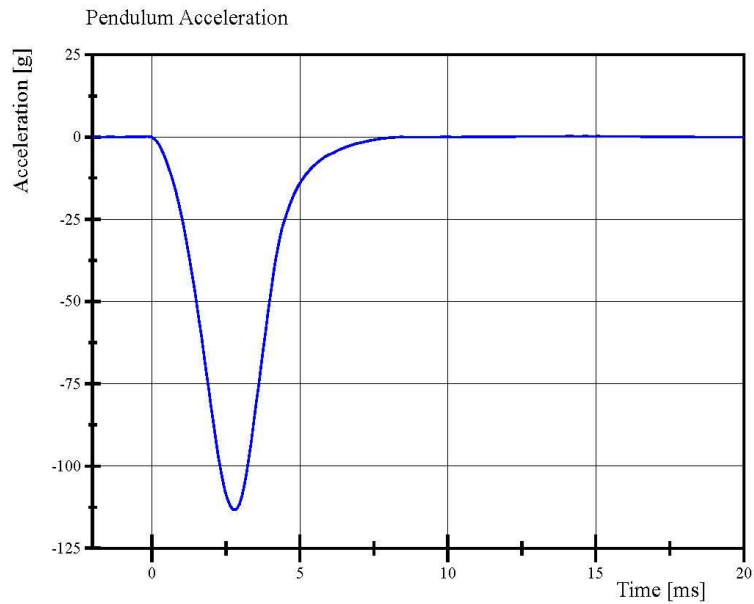

Filter Class: CFC\_600  
Max: 0.2 g at 14.2 ms  
Min: -113.3 g at 2.8 ms

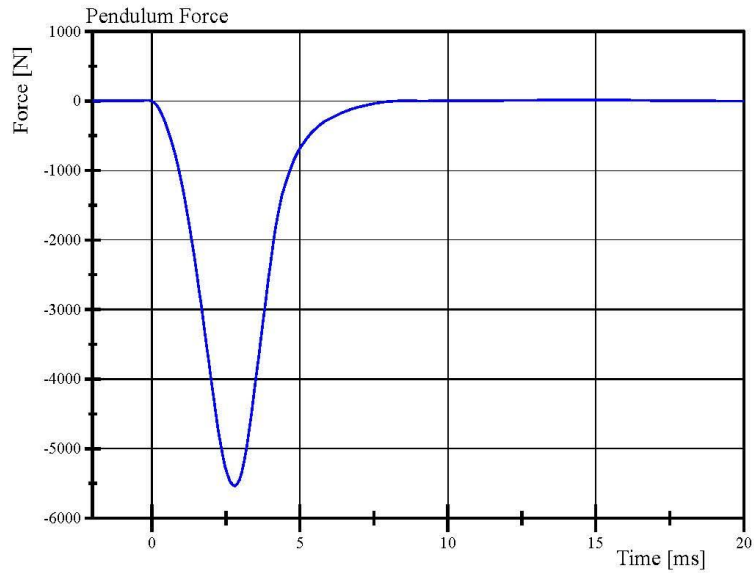

Filter Class: CFC\_600  
Max: 11.0 N at 14.2 ms  
Min: -5,534.5 N at 2.8 ms

Specification Source: CFR49 Part 572 Subpart E  
with Polarity in accordance with J211

12.03.2019 08:01:51 1845



Page 24 of 27

**Post-Test Calibration Sheets**

**Driver S/N 037**

**Transportation Research Center Inc.**  
**572E HIII 50th Male Dummy**  
**External Dimensions**  
**Serial No. 037**  
**Calibration No. 65**

Symbol	Description	Specification	Results	Pass
		mm	mm	
A	Total Sitting Height	878.8 - 889.0	880	Yes
B	Shoulder Pivot Height	505.5 - 520.7	510	Yes
C	H-Point Height	83.8 - 88.9	85	Yes
D	H-Point From Seatback	134.6 - 139.7	137	Yes
E	Shoulder Pivot From Backline	83.8 - 94.0	91	Yes
F	Thigh Clearance	139.7 - 154.9	147	Yes
G	Back Of Elbow To Wrist Pivot	289.6 - 304.8	295	Yes
H	Skull Cap To Backline	40.6 - 45.7	45	Yes
I	Shoulder-Elbow Length	330.2 - 345.4	337	Yes
J	Elbow Rest Height	190.5 - 210.8	199	Yes
K	Buttock Knee Length	579.1 - 604.5	601	Yes
L	Popliteal Height	429.3 - 454.7	440	Yes
M	Knee Pivot Height	485.1 - 500.4	494	Yes
N	Buttock Popliteal Length	452.1 - 477.5	470	Yes
O	Chest Depth	213.4 - 228.6	223	Yes
P	Foot Length	251.5 - 266.7	264	Yes
V	Shoulder Breadth	421.6 - 436.9	425	Yes
W	Foot Breadth	91.4 - 106.7	96	Yes
Y	Chest Circumference	970.3 - 1000.8	991	Yes
Z	Waist Circumference	835.7 - 866.1	865	Yes
AA	Location For Chest Circumference	429.3 - 434.3	432	Yes
BB	Location For Waist Circumference	226.1 - 231.1	229	Yes

Revised 8/10/12



## Transportation Research Center Inc.

Front Head Drop

HIII 50th Serial No. 037 Certification No. 65-1

Test Date: 12/13/2019

Test Parameter	Specification	Test Results	Pass
Temperature	20.6 - 22.2 °C	21.5 °C	Yes
Relative Humidity	10 - 70 %	41 %	Yes
Peak Head Resultant Acceleration	225 - 275 g	252.7 g	Yes
Peak Head Lateral Acceleration	(-15) - 15 g	6.4 g	Yes
Is Acceleration Curve Unimodal within 10% of Peak?	< 10 %	3.85 %	Yes

**Test meets specifications.**

**Condition:** Used

**Comments:**

**Head Skin S/N:** N/A

Specification Source: CFR49 Part 572 Subpart E  
with Polarity in accordance with J211

12.13.2019 09:00:10.576






## Transportation Research Center Inc.

### Front Head Drop

HIII 50th Serial No. 037 Certification No. 65-1


Test Date: 12/13/2019

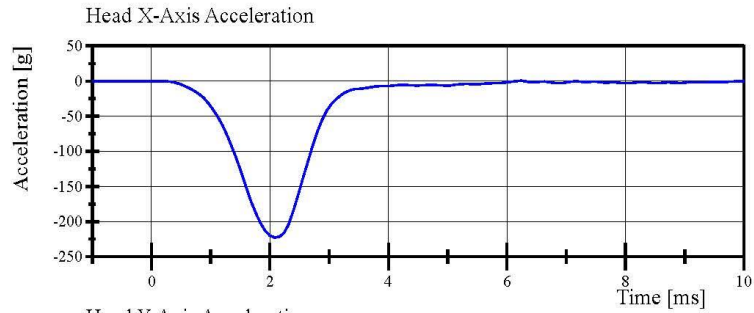

Filter Class: CFC\_1000

Max: 0.5 g at 6.2 ms


Min: -222.8 g at 2.1 ms

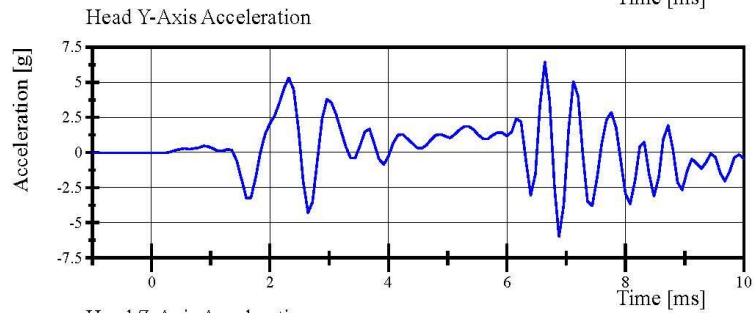

Filter Class: CFC\_1000

Max: 6.4 g at 6.6 ms


Min: -6.0 g at 6.9 ms

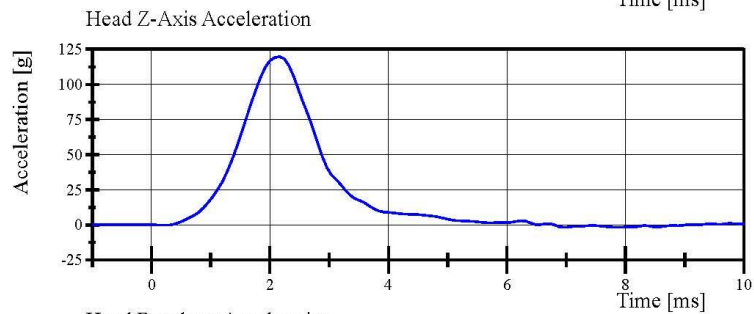

Filter Class: CFC\_1000

Max: 119.8 g at 2.2 ms

Min: -1.7 g at 7.8 ms

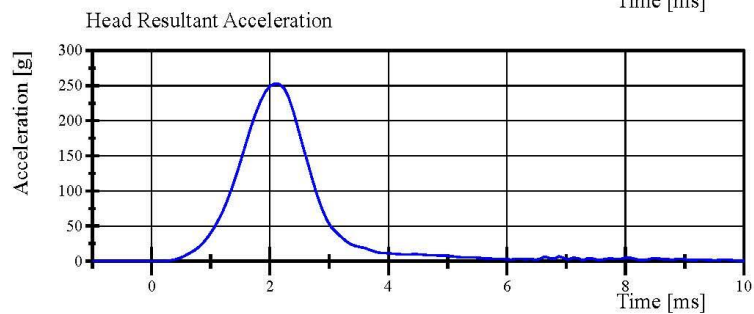

Filter Class: CFC\_1000

Max: 252.7 g at 2.1 ms

Min: 0.0 g at -1.0 ms

Specification Source: CFR49 Part 572 Subpart E  
with Polarity in accordance with J211

12.13.2019 09:01:01 576



## Transportation Research Center Inc.

Neck Flexion

HIII 50th Serial No. 037 Certification No. 65-1

Test Date: 12/16/2019

Test Parameter	Specification	Test Results	Pass
Temperature	20.6 - 22.2 °C	21.5 °C	Yes
Relative Humidity	10 - 70 %	40 %	Yes
Pendulum Velocity	6.89 - 7.13 m/s	6.905 m/s	Yes
Pendulum Acceleration Decay Crossing -5g	34 - 42 ms	38.1 ms	Yes
Pendulum Acceleration at 10ms	(-22.5) - (-27.5) g	-23.72 g	Yes
Pendulum Acceleration at 20ms	(-17.6) - (-22.6) g	-21.52 g	Yes
Pendulum Acceleration at 30ms	(-12.5) - (-18.5) g	-14.91 g	Yes
Pendulum Acceleration > 30ms	>= (-29.0) g	-14.91 g	Yes
Total Head D-Plane Rotation			
Peak	(-64) - (-78) °	-68.3 °	Yes
Time of Peak	57 - 64 ms	61.0 ms	Yes
Total Head D-Plane Rotation Decay to 0°	113 - 128 ms	120.6 ms	Yes
Total Neck Occipital Condyles Moment			
Peak	88.1 - 108.4 N·m	107.41 N·m	Yes
Time of Peak	47 - 58 ms	51.6 ms	Yes
Total Neck Occipital Condyles Moment Decay to 0 N·m	97 - 107 ms	97.8 ms	Yes

**Test meets specifications.**

**Condition:** Used

**Comments:**

**Neck S/N: 4728**

Specification Source: CFR49 Part 572 Subpart E  
with Polarity in accordance with J211

12.16.2019 14:48:27 1838




## Transportation Research Center Inc.


Neck Flexion

HIII 50th Serial No. 037 Certification No. 65-1


Test Date: 12/16/2019

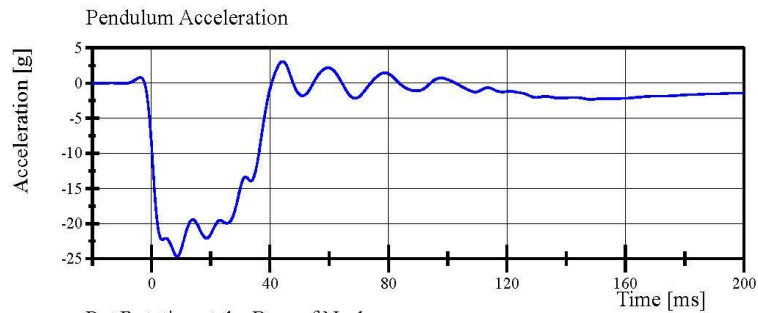


Filter Class: CFC\_60  
Max: 3.1 g at 44.3 ms  
Min: -24.7 g at 8.7 ms

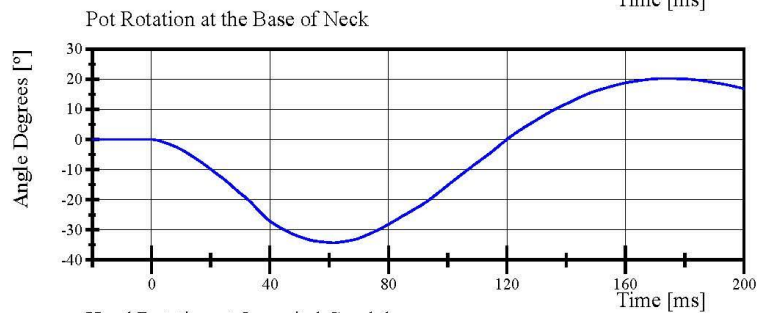

Filter Class: CFC\_60  
Max: 20.3 ° at 173.7 ms  
Min: -34.3 ° at 61.6 ms

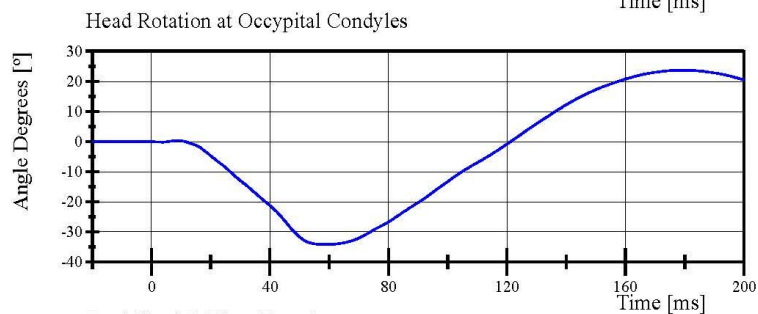

Filter Class: CFC\_60  
Max: 23.7 ° at 179.5 ms  
Min: -34.1 ° at 60.3 ms

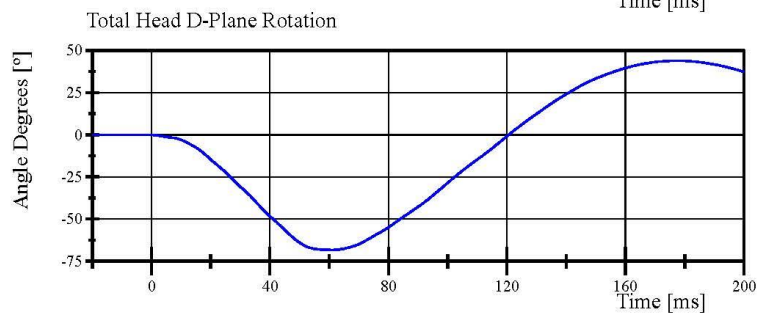

Filter Class: CFC\_60  
Max: 43.9 ° at 177.6 ms  
Min: -68.3 ° at 61.0 ms

Specification Source: CFR49 Part 572 Subpart E  
with Polarity in accordance with J211

12.16.2019 14:49:55 1838




## Transportation Research Center Inc.


Neck Flexion

HIII 50th Serial No. 037 Certification No. 65-1


Test Date: 12/16/2019

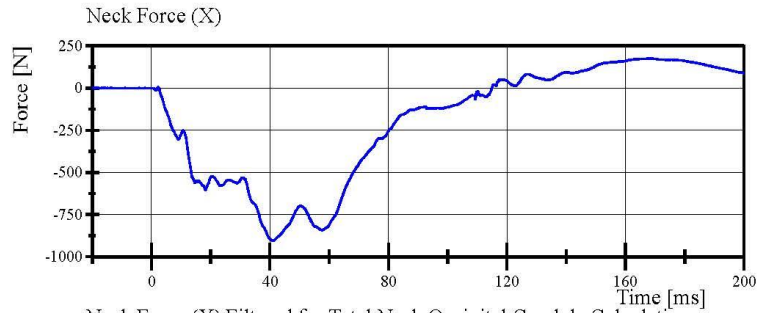


Filter Class: CFC\_1000  
Max: 175.0 N at 168.2 ms  
Min: -904.1 N at 41.2 ms

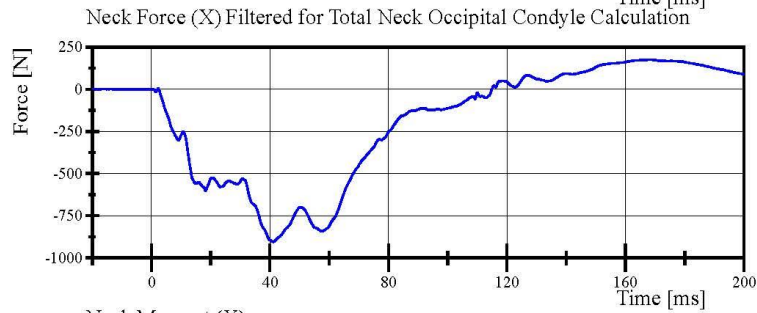

Filter Class: CFC\_600  
Max: 174.9 N at 168.4 ms  
Min: -904.1 N at 41.1 ms

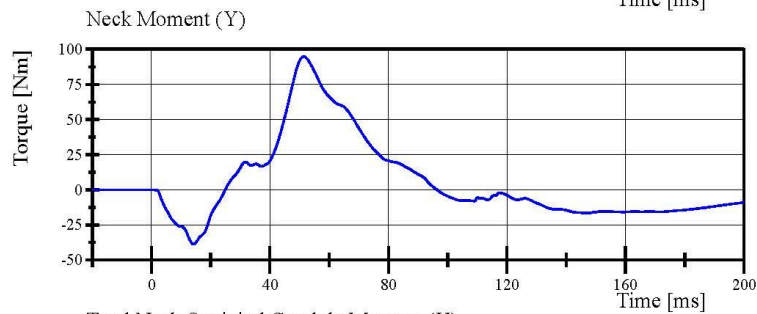

Filter Class: CFC\_600  
Max: 94.8 Nm at 51.5 ms  
Min: -38.6 Nm at 14.2 ms

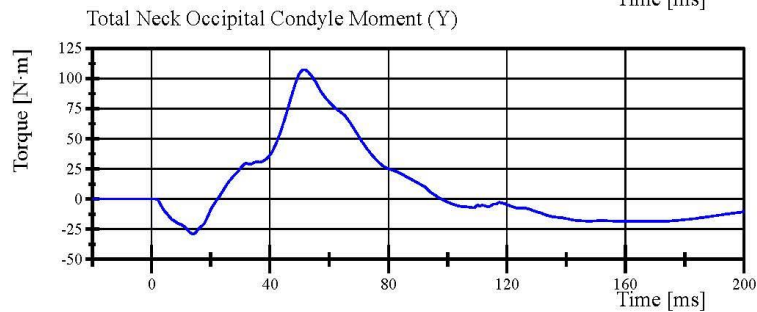

Filter Class: Without\_(Constar  
Max: 107.4 N·m at 51.6 ms  
Min: -29.1 N·m at 14.0 ms

Specification Source: CFR49 Part 572 Subpart E  
with Polarity in accordance with J211

12.16.2019 14:49:56 1838





## Transportation Research Center Inc.

Neck Extension

HIH 50th Serial No. 037 Certification No. 65-1

Test Date: 12/16/2019

Test Parameter	Specification	Test Results	Pass
Temperature	20.6 - 22.2 °C	21.6 °C	Yes
Relative Humidity	10 - 70 %	40 %	Yes
Pendulum Velocity	(-5.95) - (-6.18) m/s	-5.966 m/s	Yes
Pendulum Acceleration Decay Crossing 5g	38 - 46 ms	40.2 ms	Yes
Pendulum Acceleration at 10ms	17.2 - 21.2 g	19.70 g	Yes
Pendulum Acceleration at 20ms	14.0 - 19.0 g	17.75 g	Yes
Pendulum Acceleration at 30ms	11.0 - 16.0 g	13.98 g	Yes
Pendulum Acceleration > 30ms	<= 22.0 g	13.98 g	Yes
Total Head D-Plane Rotation			
Peak	81 - 106 °	92.8 °	Yes
Time of Peak	72 - 82 ms	77.2 ms	Yes
Total Head D-Plane Rotation Decay to 0°	147 - 174 ms	158.2 ms	Yes
Total Neck Occipital Condyles Moment			
Peak	(-52.9) - (-80) N·m	-68.05 N·m	Yes
Time of Peak	65 - 79 ms	71.4 ms	Yes
Total Neck Occipital Condyles Moment Decay to 0 N·m	120 - 148 ms	144.7 ms	Yes

**Test meets specifications.**

**Condition:** Used

**Comments:**

**Neck S/N: 4728**

Specification Source: CFR49 Part 572 Subpart E  
with Polarity in accordance with J211

12.16.2019 15:22:01 1983




## Transportation Research Center Inc.


Neck Extension

HIII 50th Serial No. 037 Certification No. 65-1


Test Date: 12/16/2019

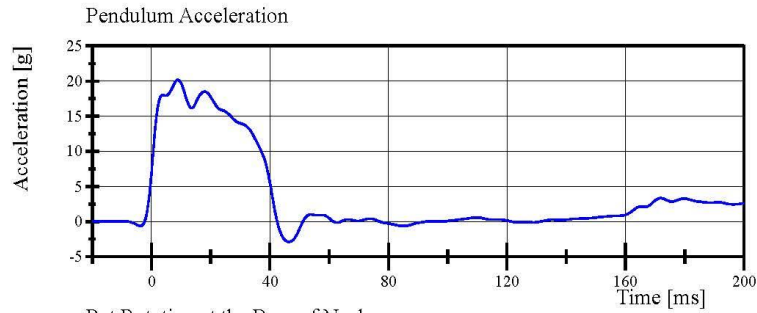


Filter Class: CFC\_60  
Max: 20.2 g at 9.0 ms  
Min: -2.9 g at 46.4 ms

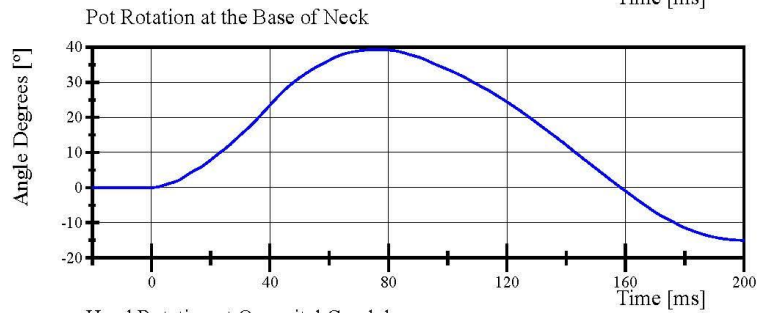

Filter Class: CFC\_60  
Max: 39.3 ° at 76.5 ms  
Min: -15.0 ° at 200.0 ms

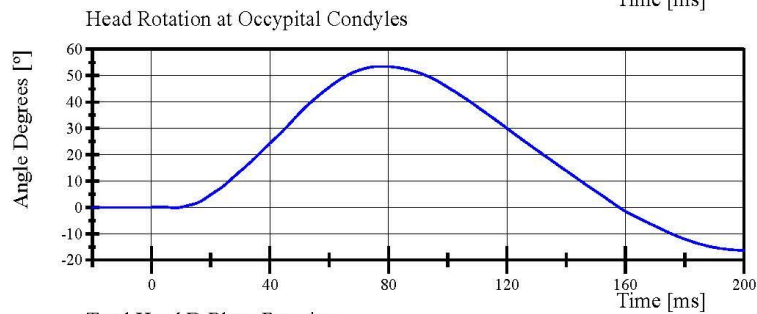

Filter Class: CFC\_60  
Max: 53.5 ° at 77.6 ms  
Min: -16.2 ° at 198.8 ms

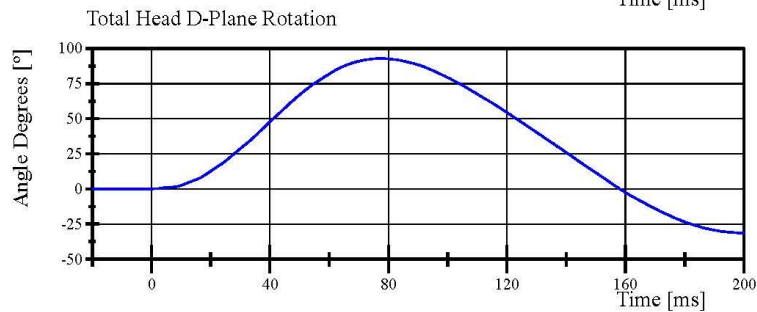

Filter Class: CFC\_60  
Max: 92.8 ° at 77.2 ms  
Min: -31.3 ° at 200.0 ms

Specification Source: CFR49 Part 572 Subpart E  
with Polarity in accordance with J211

12.16.2019 15:22:29 1983




## Transportation Research Center Inc.


Neck Extension

HIII 50th Serial No. 037 Certification No. 65-1


Test Date: 12/16/2019

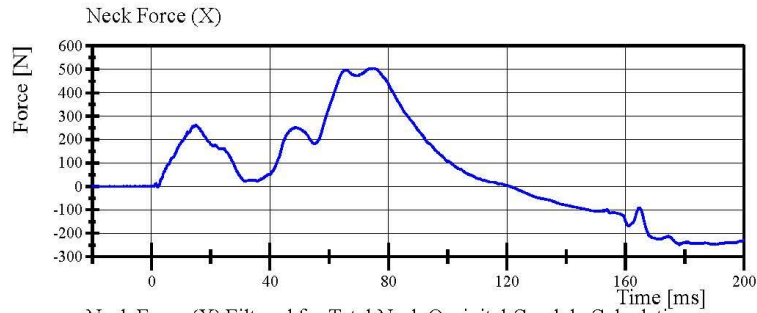


Filter Class: CFC\_1000  
Max: 504.7 N at 75.1 ms  
Min: -249.2 N at 178.2 ms

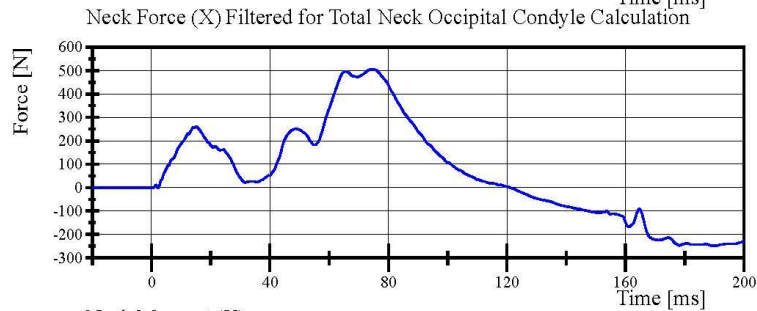

Filter Class: CFC\_600  
Max: 504.5 N at 75.0 ms  
Min: -247.5 N at 190.9 ms

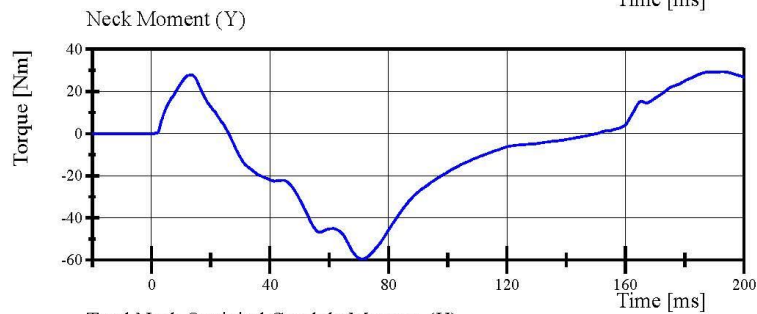

Filter Class: CFC\_600  
Max: 29.3 Nm at 192.3 ms  
Min: -59.5 Nm at 71.2 ms

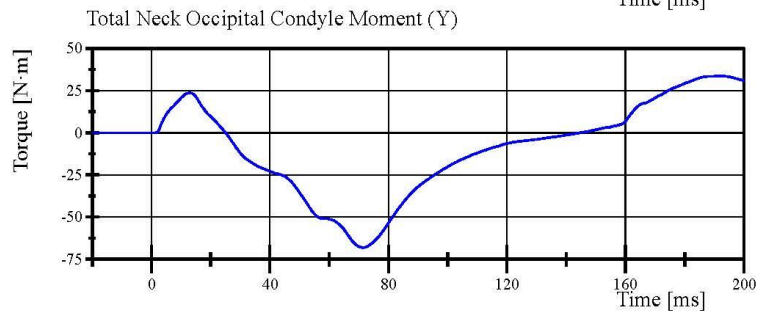

Filter Class: Without\_(Constar  
Max: 33.7 N·m at 192.2 ms  
Min: -68.0 N·m at 71.4 ms

Specification Source: CFR49 Part 572 Subpart E  
with Polarity in accordance with J211

12.16.2019 15:22:29 1983



## Transportation Research Center Inc.

Front Thorax

HIII 50th Serial No. 037 Certification No. 65-1

Test Date: 12/13/2019

Test Parameter	Specification	Test Results	Pass
Temperature	20.6 - 22.2 °C	21.3 °C	Yes
Relative Humidity	10 - 70 %	41 %	Yes
Probe Velocity	6.59 - 6.83 m/s	6.777 m/s	Yes
Probe Force Peak	(-5,160) - (-5,894) N	-5,637.4 N	Yes
Maximum Chest Compression	(-63.5) - (-72.6) mm	-68.03 mm	Yes
Internal Hysteresis	69 - 85 %	71.9 %	Yes

**Test meets specifications.**

**Condition: Used**

**Comments:**

**Jacket S/N: 2565**

**Rib Set S/N: 02033121A**

Specification Source: CFR49 Part 572 Subpart E  
with Polarity in accordance with J211

12.13.2019 08:10:21 412






## Transportation Research Center Inc.

Front Thorax

HIII 50th Serial No. 037 Certification No. 65-1


Test Date: 12/13/2019

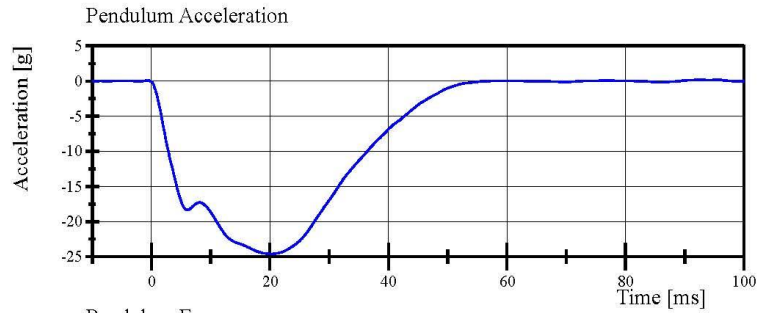

Filter Class: CFC\_180

Max: 0.2 g at 92.6 ms


Min: -24.6 g at 20.1 ms

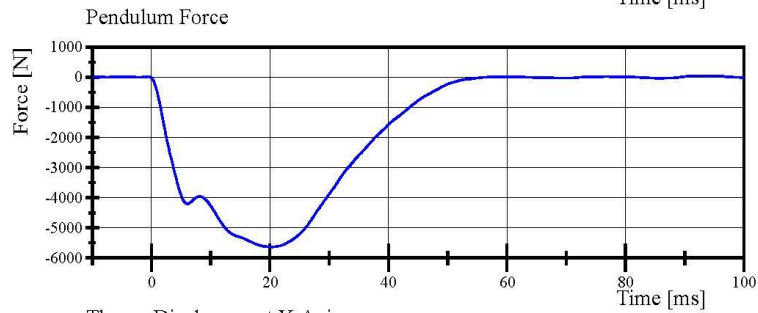

Filter Class: CFC\_180

Max: 48.0 N at 92.6 ms


Min: -5,637.4 N at 20.1 ms

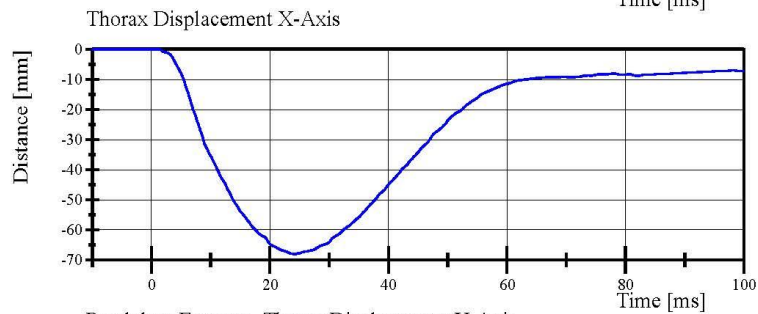

Filter Class: CFC\_600

Max: 0.0 mm at -10.0 ms

Min: -68.0 mm at 24.2 ms

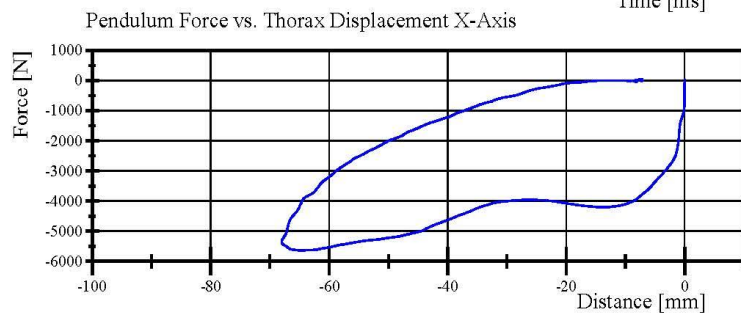

Filter Class: CFC\_180

Max: 48.0 N at -7.5 mm

Min: -5,637.4 N at -64.8 mm

Specification Source: CFR49 Part 572 Subpart E  
with Polarity in accordance with J211

12.13.2019 08:10:53 412




# Transportation Research Center Inc.

Hybrid III 50th Male Hip Range of Motion




Serial Number: 037 Date: 13-Dec-2019  
Side Tested: Left Hip Time: 10:43  
Test Number: 1

TEST PARAMETER	SPECIFICATION		TEST RESULTS		
Temperature	18.9	- 25.6	21.3	°C	Pass
Humidity	10	- 70	39	%	Pass
Moment at 30°	0	≤ 94.9	80.33	N-m	Pass
Angle at 203 Nm	40	- 50	46.13	deg	Pass
Average Velocity	5	- 10	7.02	deg/sec	Pass

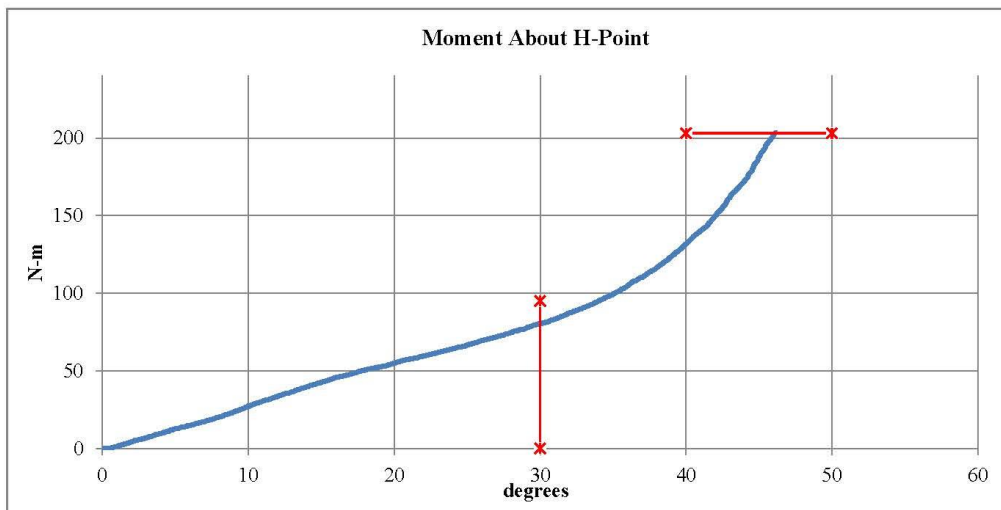

Max: 8.29 deg/sec Min: 5.55 deg/sec

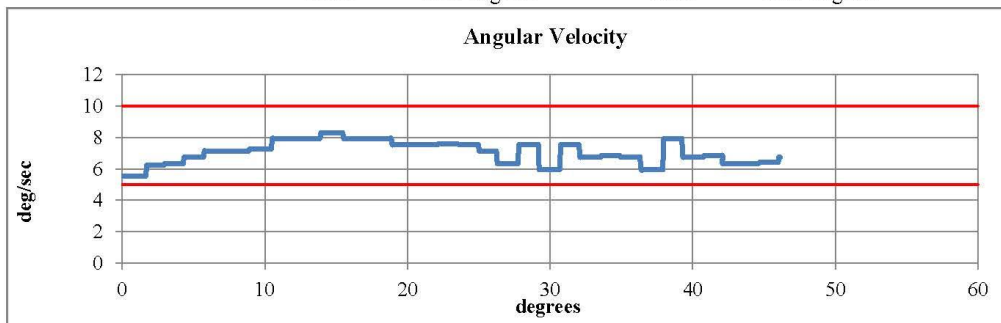

Comments:  
Pelvis Skin S/N: EK3565



# Transportation Research Center Inc.

Hybrid III 50th Male Hip Range of Motion



Serial Number: 037 Date: 13-Dec-2019  
Side Tested: Right Hip Time: 12:37  
Test Number: 1

TEST PARAMETER	SPECIFICATION			TEST RESULTS		
Temperature	18.9	-	25.6	21.3	°C	Pass
Humidity	10	-	70	39	%	Pass
Moment at 30°	0	≤	94.9	90.45	N-m	Pass
Angle at 203 Nm	40	-	50	45.02	deg	Pass
Average Velocity	5	-	10	7.12	deg/sec	Pass

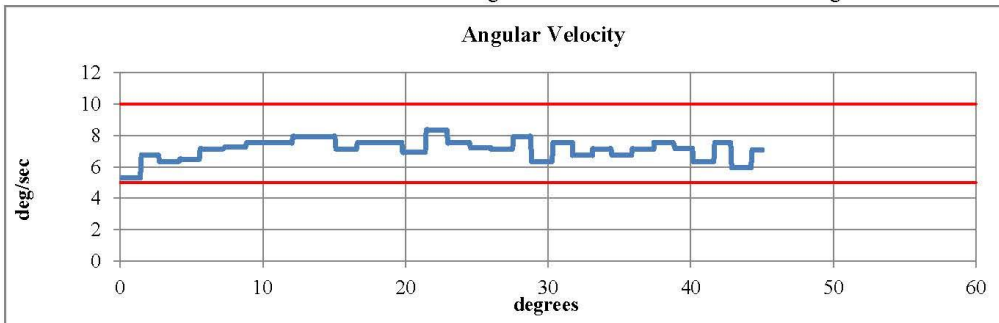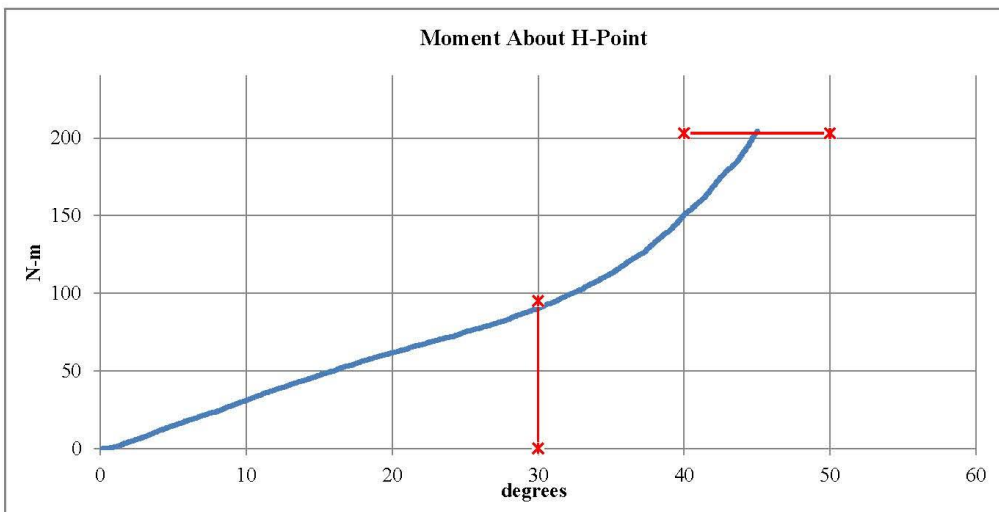

Comments:  
Pelvis Skin S/N: EK3565

## Transportation Research Center Inc.

Left Knee Femur Response Test  
HIII 50th Serial No. 037 Certification No. 65-1  
Test Date: 12/13/2019

Test Parameter	Specification	Test Results	Pass
Temperature	18.9 - 25.5 °C	21.3 °C	Yes
Relative Humidity	10 - 70 %	39 %	Yes
Probe Velocity	2.07 - 2.13 m/s	2.080 m/s	Yes
Peak Femur Force	(-4,715.2) - (-5,782.6) N	-5,455.28 N	Yes

**Test meets specifications.**

**Condition: Used**

**Comments:**

**Knee Skin S/N: 2672**

Specification Source: CFR49 Part 572 Subpart E  
with Polarity in accordance with J211


12.13.2019 07:36:46 1800






## Transportation Research Center Inc.

Left Knee Femur Response Test  
HIII 50th Serial No. 037 Certification No. 65-1  
Test Date: 12/13/2019

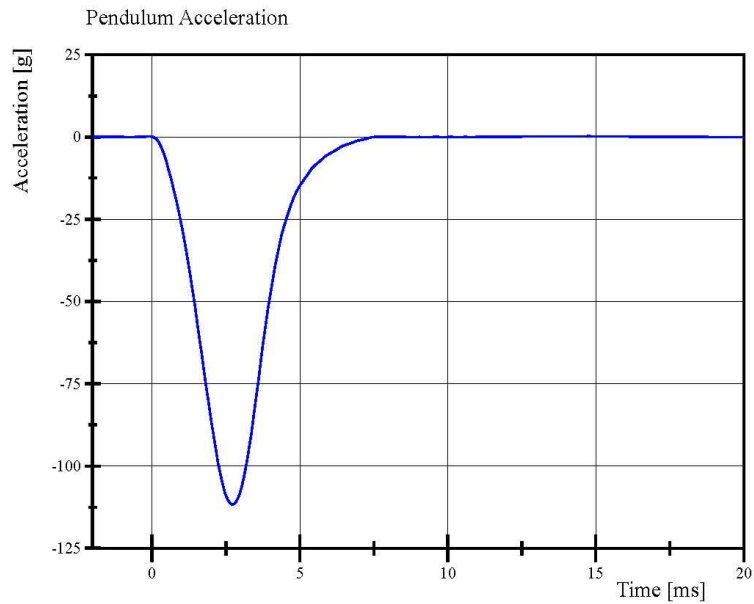

Filter Class: CFC\_600  
Max: 0.2 g at 14.7 ms  
Min: -111.7 g at 2.7 ms

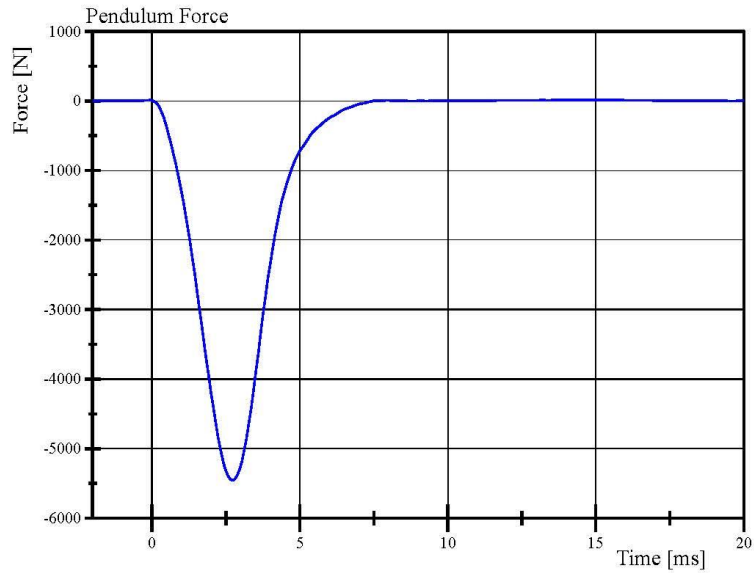

Filter Class: CFC\_600  
Max: 10.7 N at 14.7 ms  
Min: -5,455.3 N at 2.7 ms

Specification Source: CFR49 Part 572 Subpart E  
with Polarity in accordance with J211

12.13.2019 07:37:18 1800



## Transportation Research Center Inc.

Right Knee Femur Response Test  
HIII 50th Serial No. 037 Certification No. 65-1  
Test Date: 12/13/2019

Test Parameter	Specification	Test Results	Pass
Temperature	18.9 - 25.5 °C	21.3 °C	Yes
Relative Humidity	10 - 70 %	39 %	Yes
Probe Velocity	2.07 - 2.13 m/s	2.086 m/s	Yes
Peak Femur Force	(-4,715.2) - (-5,782.6) N	-4,942.57 N	Yes

**Test meets specifications.**

**Condition: Used**

**Comments:**

**Knee Skin S/N: 1248**


Specification Source: CFR49 Part 572 Subpart E  
with Polarity in accordance with J211

12.13.2019 07:39:39 1728




## Transportation Research Center Inc.

Right Knee Femur Response Test  
HIII 50th Serial No. 037 Certification No. 65-1  
Test Date: 12/13/2019

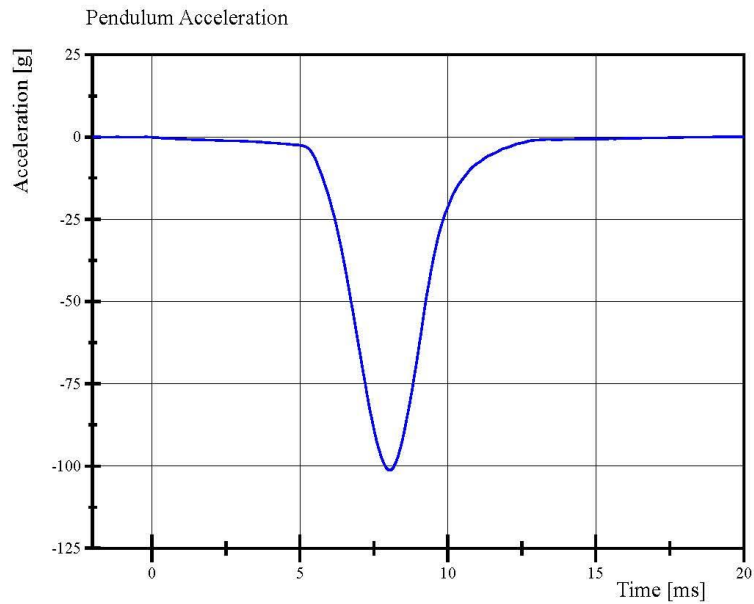

Filter Class: CFC\_600  
Max: 0.1 g at 20.0 ms  
Min: -101.2 g at 8.0 ms

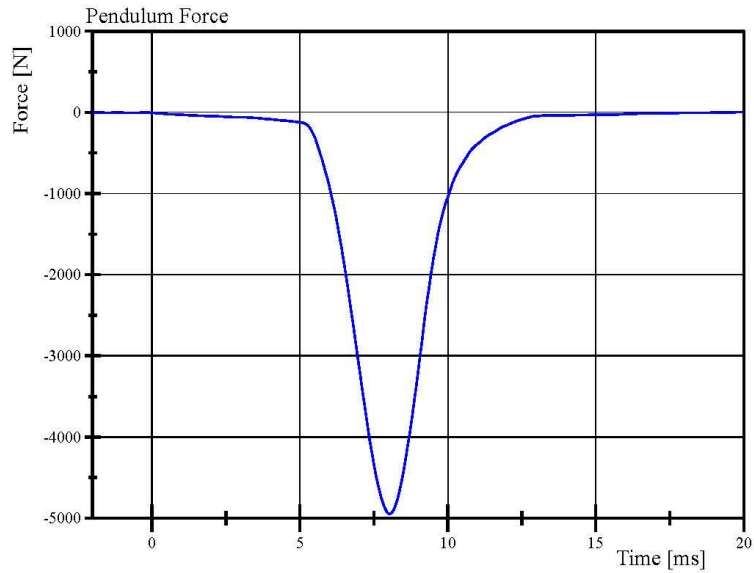

Filter Class: CFC\_600  
Max: 3.7 N at 20.0 ms  
Min: -4,942.6 N at 8.0 ms

Specification Source: CFR49 Part 572 Subpart E  
with Polarity in accordance with J211

12.13.2019 07:40:09 1728



**Pre-Test Calibration Sheets**

**Front Passenger S/N EB7513**



**Transportation Research Center Inc.**  
**5720 HIII 5th Dummy**  
**External Dimensions**  
**Serial No. EB7513 Calibration No. 09**

Symbol	Description	Specification	Results	Pass
		mm	mm	
A	Total Sitting Height	774.7 - 800.1	779	Yes
B	Shoulder Pivot Height	431.8 - 457.2	443	Yes
C	Hip Pivot Height	81.3 - 86.3	85	Yes
D	Hip Pivot from Backline	144.8 - 149.8	148	Yes
E	Shoulder Pivot from Backline	68.6 - 83.8	79	Yes
F	Thigh Clearance	119.4 - 134.6	130	Yes
G	Back of Elbow to Wrist Pivot	243.9 - 259.1	249	Yes
H	Head Back to Backline	43.2 - 48.2	45	Yes
I	Shoulder to Elbow Length	276.8 - 297.2	286	Yes
J	Elbow Rest Height	182.8 - 203.2	197	Yes
K	Buttock Knee Length	520.7 - 546.1	533	Yes
L	Popliteal Height	355.6 - 376.0	359	Yes
M	Knee Pivot Height	393.7 - 419.1	409	Yes
N	Buttock Popliteal Length	414.0 - 439.4	430	Yes
O	Chest Depth without Jacket	175.3 - 190.5	182	Yes
P	Foot Length	218.5 - 233.7	225	Yes
R	Buttock to Knee Pivot Length	457.2 - 482.6	473	Yes
S	Head Breadth	137.1 - 147.3	141	Yes
T	Head Depth	177.8 - 188.0	180	Yes
U	Hip Breadth	299.7 - 314.9	306	Yes
V	Shoulder Breadth	350.5 - 365.7	356	Yes
W	Foot Breadth	78.8 - 94.0	85	Yes
X	Head Circumference	528.3 - 548.7	539	Yes
Y	Chest Circumference with Jacket	850.9 - 881.3	867	Yes
Z	Waist Circumference	759.5 - 789.9	775	Yes
AA	Reference Location for Chest Circumference	332.7 - 358.1	345	Yes
BB	Reference Location for Waist Circumference	160.0 - 170.2	164	Yes

Revised 8/10/12



## Transportation Research Center Inc.

Front Head Drop

HIII 5th Serial No. EB7513 Certification No. 9-1

Test Date: 12/3/2019

Test Parameter	Specification	Test Results	Pass
Temperature	18.9 - 25.5 °C	21.2 °C	Yes
Relative Humidity	10 - 70 %	39 %	Yes
Peak Head Resultant Acceleration	250 - 300 g	265.5 g	Yes
Peak Head Lateral Acceleration	(-15) - 15 g	4.6 g	Yes
Is Acceleration Curve Unimodal within 10% of Peak?	< 10 %	1.37 %	Yes

**Test meets specifications.**

**Condition: Used**

**Comments:**

**Head Skin S/N: EA8751**

Specification Source: CFR49 Part 572 Subpart O  
with Polarity in accordance with J211

Page 9 of 28

12.03.2019 10:44:40 578




## Transportation Research Center Inc.

Front Head Drop

HIII 5th Serial No. EB7513 Certification No. 9-1


Test Date: 12/3/2019

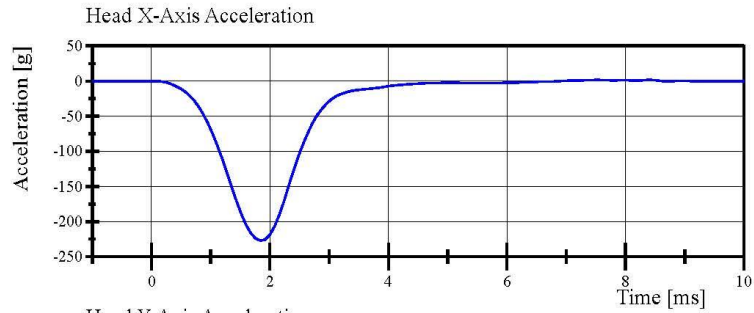

Filter Class: CFC\_1000

Max: 1.7 g at 7.5 ms


Min: -227.3 g at 1.8 ms

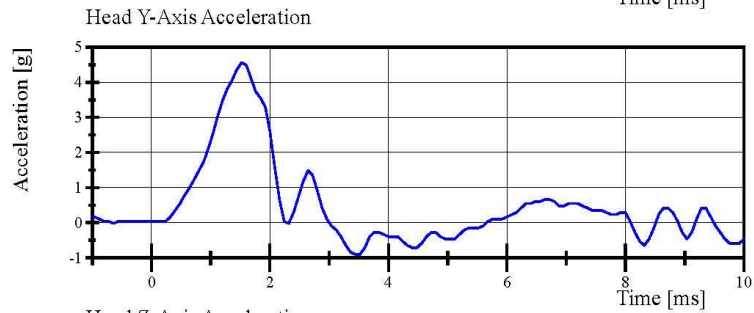

Filter Class: CFC\_1000

Max: 4.6 g at 1.5 ms


Min: -0.9 g at 3.4 ms

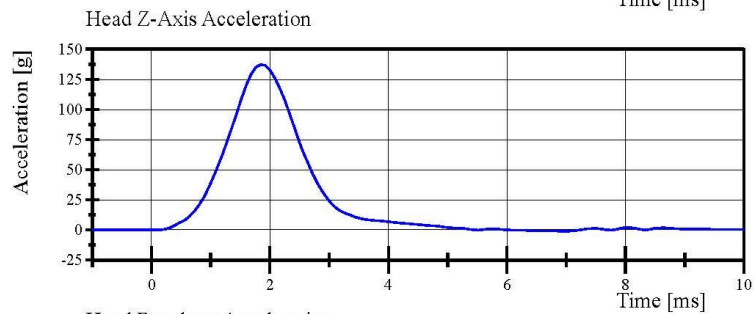

Filter Class: CFC\_1000

Max: 137.3 g at 1.8 ms

Min: -1.1 g at 7.0 ms

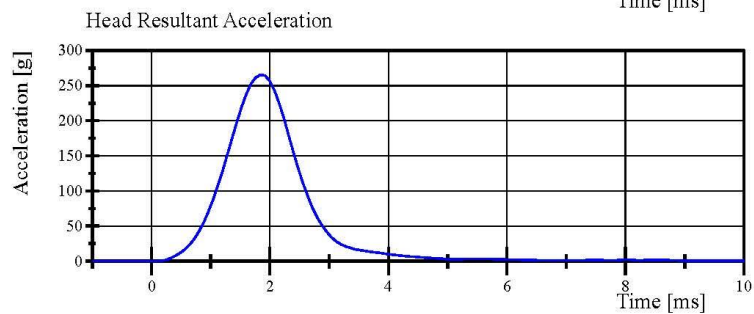

Filter Class: CFC\_1000

Max: 265.5 g at 1.8 ms

Min: 0.0 g at -0.6 ms

Specification Source: CFR49 Part 572 Subpart O  
with Polarity in accordance with J211

12.03.2019 10:45:15 578



## Transportation Research Center Inc.

Neck Flexion

HIII 5th Serial No. EB7513 Certification No. 9-2

Test Date: 12/3/2019

Test Parameter	Specification	Test Results	Pass
Temperature	20.6 - 22.2 °C	21.4 °C	Yes
Relative Humidity	10 - 70 %	41 %	Yes
Pendulum Velocity	6.89 - 7.13 m/s	7.076 m/s	Yes
Pendulum Integrated Velocity Change at 10ms	(-2.1) - (-2.5) m/s	-2.15 m/s	Yes
Pendulum Integrated Velocity Change at 20ms	(-4.0) - (-5.0) m/s	-4.30 m/s	Yes
Pendulum Integrated Velocity Change at 30ms	(-5.8) - (-7.0) m/s	-6.20 m/s	Yes
Total Head D-Plane Rotation	(-77) - (-91) °	-83.4 °	Yes
Total Neck Occipital Condyles Moment Between -77° and -91° Rotation	69 - 83 N·m	80.5 N·m	Yes
Total Neck Occipital Condyles Moment Decay to 10 N·m	80 - 100 ms	90.3 ms	Yes

**Test meets specifications.**

**Condition:** Used

**Comments:**

**Neck S/N: EB6930**

Specification Source: CFR49 Part 572 Subpart O  
with Polarity in accordance with J211

Page 11 of 28

12.03.2019 08:54:18 1819





## Transportation Research Center Inc.

Neck Flexion

HIII 5th Serial No. EB7513 Certification No. 9-2

Test Date: 12/3/2019

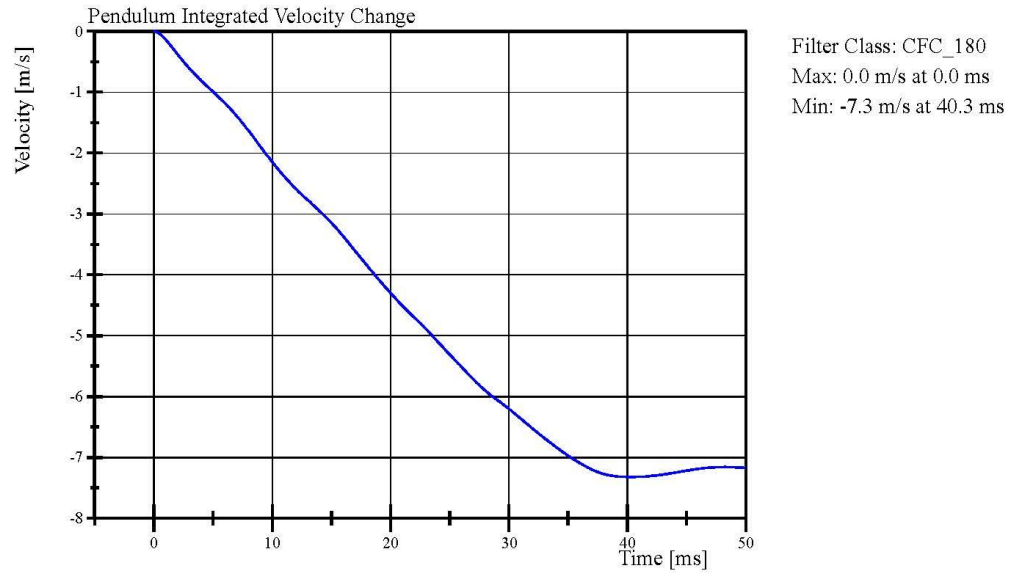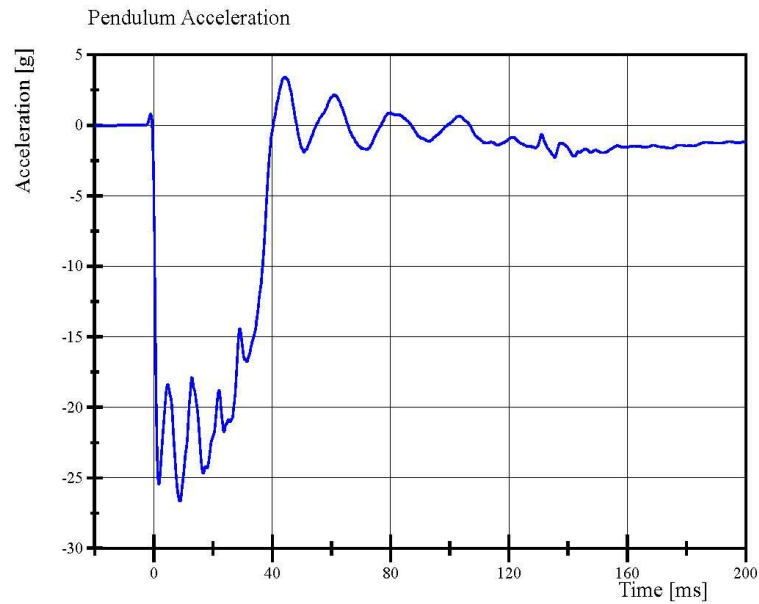

Specification Source: CFR49 Part 572 Subpart O  
with Polarity in accordance with J211

12.03.2019 08:55:28 1819






## Transportation Research Center Inc.

Neck Flexion

HIII 5th Serial No. EB7513 Certification No. 9-2


Test Date: 12/3/2019

Pot Rotation at the Base of Neck

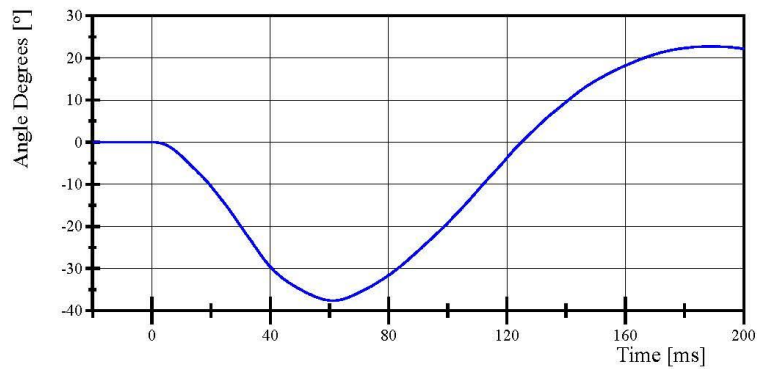


Filter Class: CFC\_60  
Max: 22.7 ° at 188.8 ms  
Min: -37.6 ° at 61.2 ms

Head Rotation at Occypital Condyles

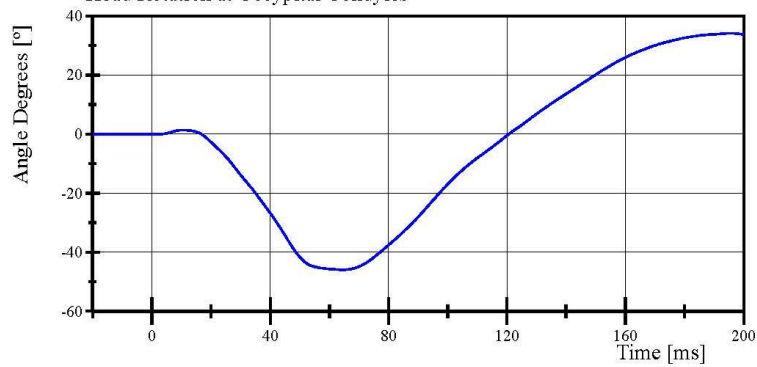

Filter Class: CFC\_60  
Max: 34.1 ° at 195.6 ms  
Min: -45.9 ° at 64.5 ms

Total Head D-Plane Rotation

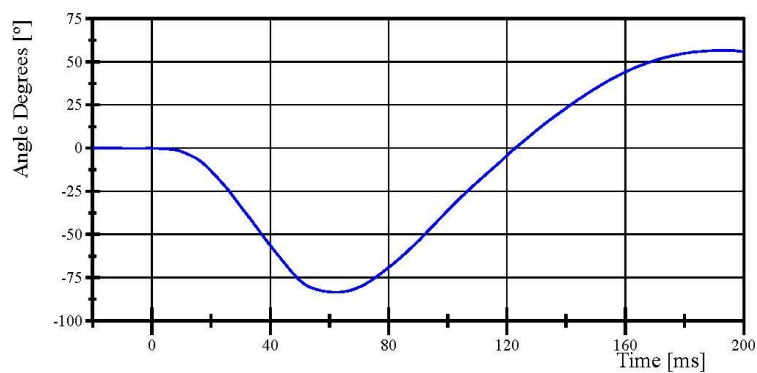

Filter Class: CFC\_60  
Max: 56.7 ° at 193.8 ms  
Min: -83.4 ° at 62.2 ms

Specification Source: CFR49 Part 572 Subpart O  
with Polarity in accordance with J211

12.03.2019 08:55:28 1819




## Transportation Research Center Inc.


Neck Flexion

HIII 5th Serial No. EB7513 Certification No. 9-2


Test Date: 12/3/2019

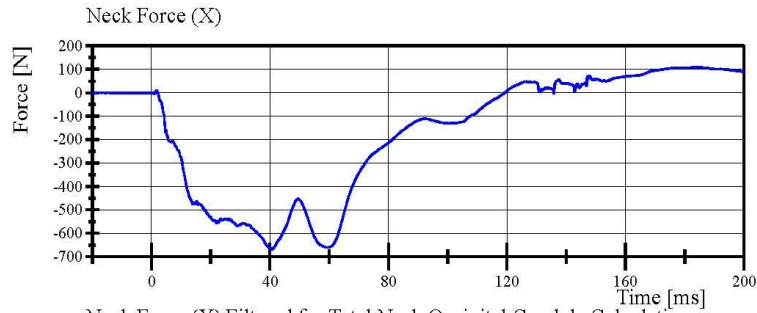


Filter Class: CFC\_1000  
Max: 109.7 N at 184.6 ms  
Min: -668.6 N at 40.6 ms

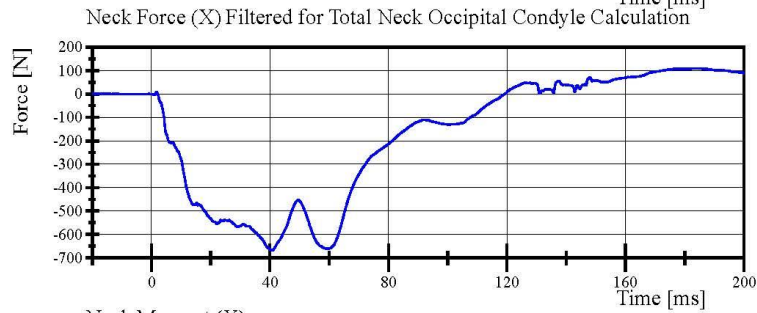

Filter Class: CFC\_600  
Max: 109.5 N at 184.6 ms  
Min: -668.4 N at 40.7 ms

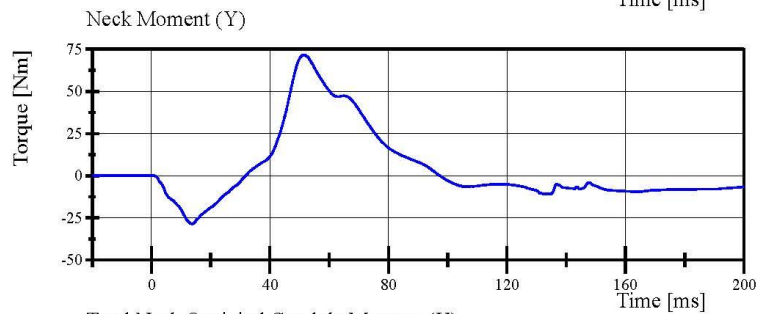

Filter Class: CFC\_600  
Max: 71.7 Nm at 51.6 ms  
Min: -28.5 Nm at 13.8 ms

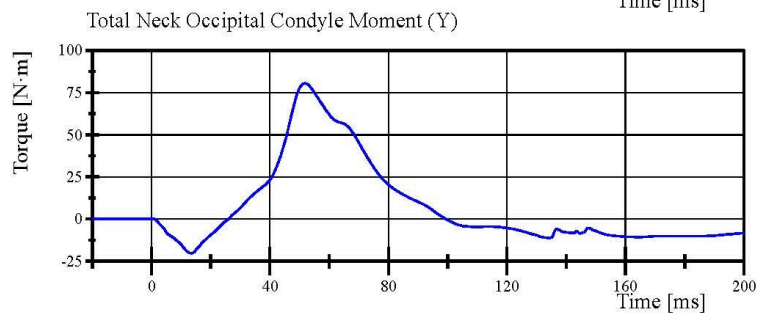

Filter Class: Without\_(Constar  
Max: 80.5 N·m at 51.8 ms  
Min: -20.2 N·m at 13.5 ms

Specification Source: CFR49 Part 572 Subpart O  
with Polarity in accordance with J211

12.03.2019 08:55:29 1819



## Transportation Research Center Inc.

Neck Extension

HIII 5th Serial No. EB7513 Certification No. 9-2

Test Date: 12/3/2019

Test Parameter	Specification	Test Results	Pass
Temperature	20.6 - 22.2 °C	21.5 °C	Yes
Relative Humidity	10 - 70 %	37 %	Yes
Pendulum Velocity	(-5.95) - (-6.19) m/s	-6.048 m/s	Yes
Pendulum Integrated Velocity Change at 10ms	1.5 - 1.9 m/s	1.66 m/s	Yes
Pendulum Integrated Velocity Change at 20ms	3.1 - 3.9 m/s	3.29 m/s	Yes
Pendulum Integrated Velocity Change at 30ms	4.6 - 5.6 m/s	4.73 m/s	Yes
Total Head D-Plane Rotation	99 - 114 °	111.8 °	Yes
Total Neck Occipital Condyles Moment Between 99° and 114° Rotation	(-53) - (-65) N·m	-54.9 N·m	Yes
Total Neck Occipital Condyles Moment Decay to -10 N·m	94 - 114 ms	106.5 ms	Yes

**Test meets specifications.**

**Condition:** Used

**Comments:**

**Neck S/N: EB6930**

Specification Source: CFR49 Part 572 Subpart O  
with Polarity in accordance with J211

Page 15 of 28

12.03.2019 10:10:02 1973




## Transportation Research Center Inc.

Neck Extension

HIII 5th Serial No. EB7513 Certification No. 9-2


Test Date: 12/3/2019

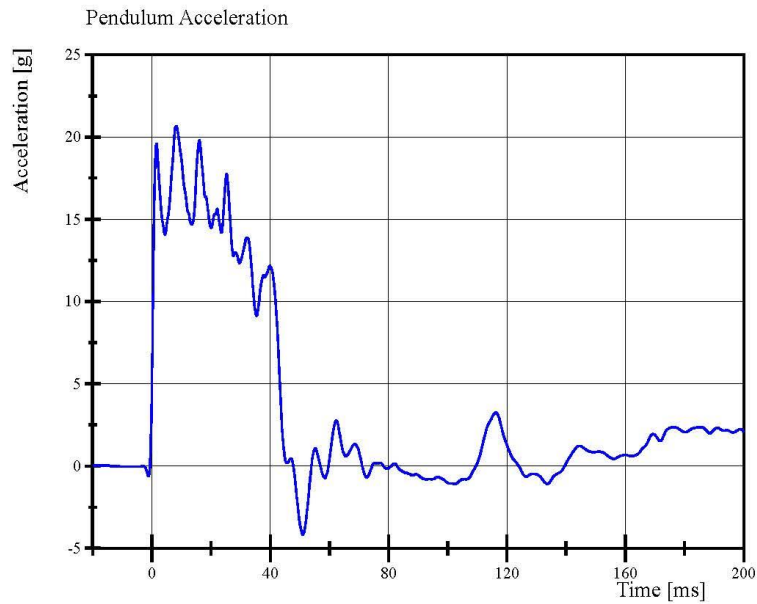

Filter Class: CFC\_180

Max: 20.7 g at 8.3 ms

Min: -4.2 g at 51.0 ms

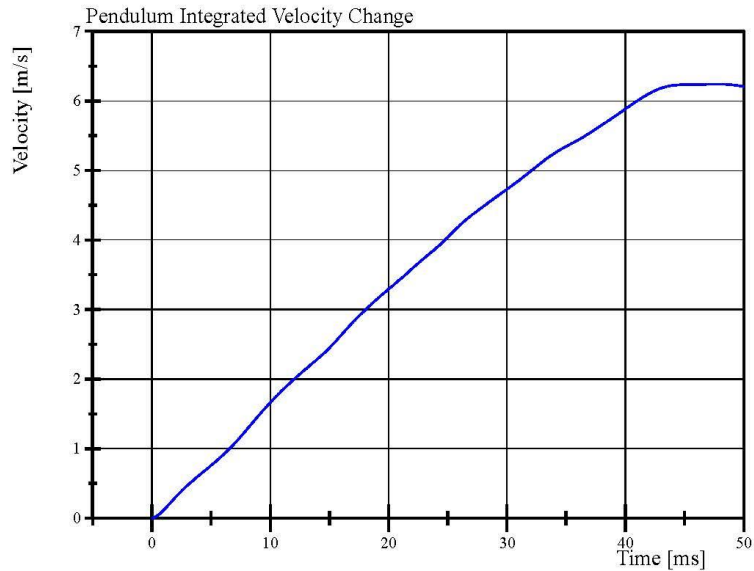

Filter Class: CFC\_180

Max: 6.2 m/s at 47.8 ms

Min: 0.0 m/s at 0.0 ms

Specification Source: CFR49 Part 572 Subpart O  
with Polarity in accordance with J211

12.03.2019 10:10:45 1973



Page 16 of 28


## Transportation Research Center Inc.

Neck Extension

HIII 5th Serial No. EB7513 Certification No. 9-2

Test Date: 12/3/2019

Pot Rotation at the Base of Neck

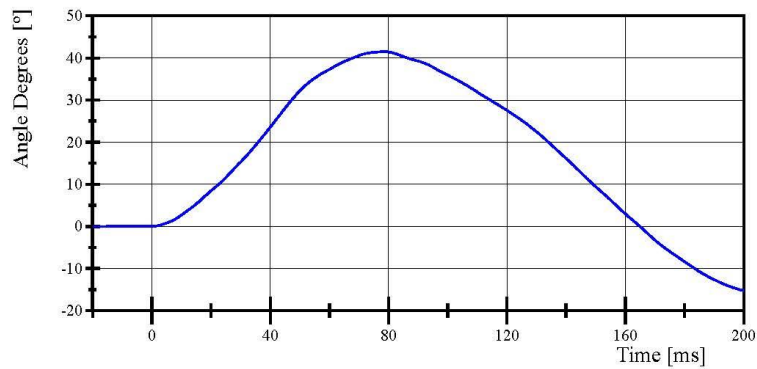


Filter Class: CFC\_60

Max: 41.5 ° at 78.5 ms

Min: -15.3 ° at 200.0 ms

Head Rotation at Occypital Condyles

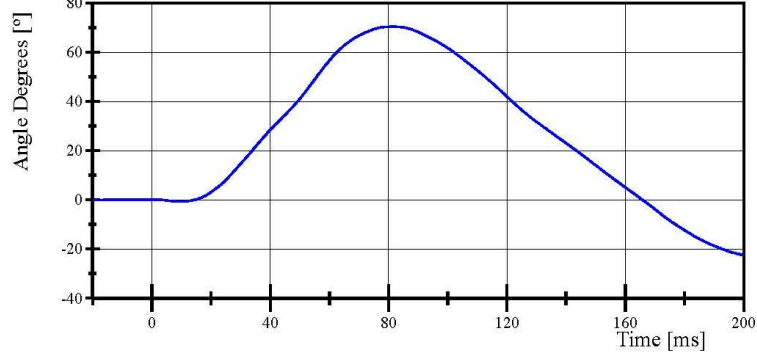


Filter Class: CFC\_60

Max: 70.3 ° at 81.5 ms

Min: -22.5 ° at 200.0 ms

Total Head D-Plane Rotation

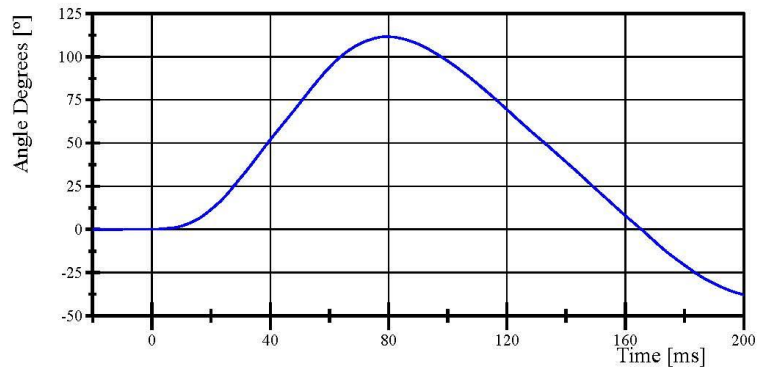

Filter Class: CFC\_60

Max: 111.8 ° at 79.3 ms

Min: -37.8 ° at 200.0 ms

Specification Source: CFR49 Part 572 Subpart O  
with Polarity in accordance with J211

12.03.2019 10:10:45 1973






## Transportation Research Center Inc.


Neck Extension

HIII 5th Serial No. EB7513 Certification No. 9-2


Test Date: 12/3/2019

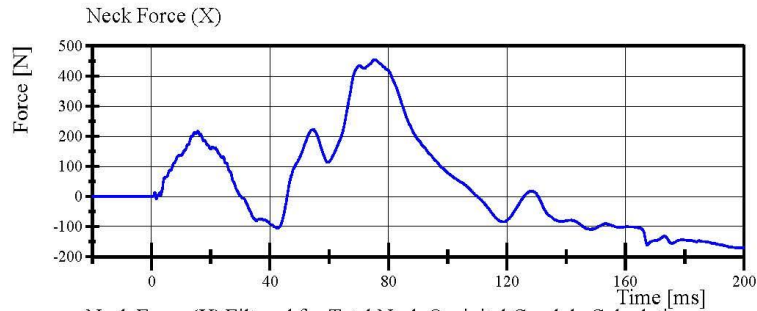


Filter Class: CFC\_1000  
Max: 454.8 N at 75.5 ms  
Min: -171.5 N at 197.5 ms

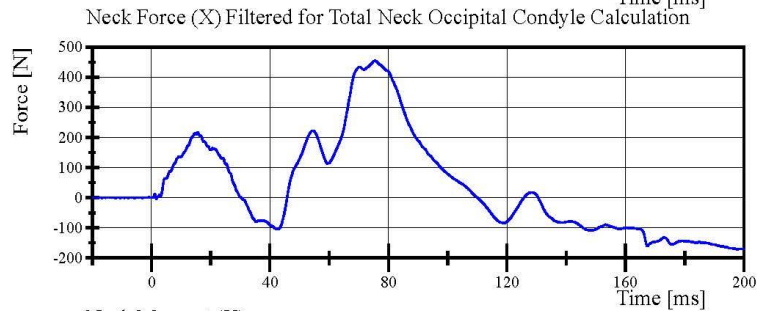

Filter Class: CFC\_600  
Max: 454.5 N at 75.6 ms  
Min: -171.2 N at 197.7 ms

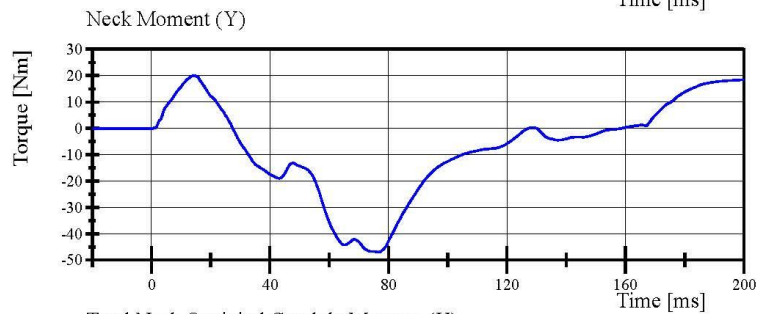

Filter Class: CFC\_600  
Max: 20.0 Nm at 14.5 ms  
Min: -47.0 Nm at 76.7 ms

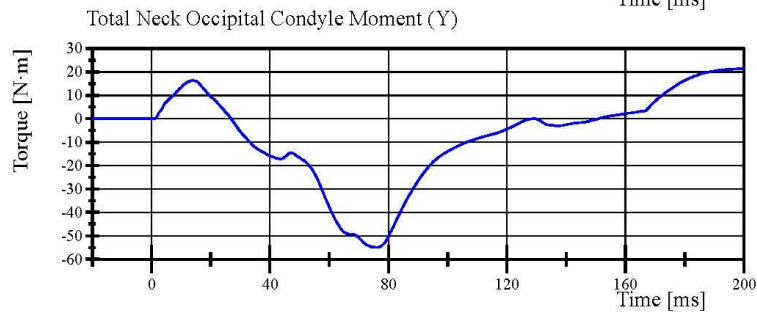

Filter Class: Without\_(Constar  
Max: 21.5 N·m at 200.0 ms  
Min: -54.9 N·m at 76.2 ms

Specification Source: CFR49 Part 572 Subpart O  
with Polarity in accordance with J211

12.03.2019 10:10:45 1973



## Transportation Research Center Inc.

Front Thorax

HIII 5th Serial No. EB7513 Certification No. 9-1

Test Date: 12/3/2019

Test Parameter	Specification	Test Results	Pass
Temperature	20.6 - 22.2 °C	21.3 °C	Yes
Relative Humidity	10 - 70 %	40 %	Yes
Probe Velocity	6.59 - 6.83 m/s	6.793 m/s	Yes
Probe Force Peak Between 50.0 mm and 58.0 mm Chest Deflection	(-3,900) - (-4,400) N	-4,287.4 N	Yes
Probe Force Peak Between 18.0 mm and 50.0 mm Chest Deflection	>= (-4,600) N	-4,311.3 N	Yes
Maximum Chest Compression	(-50) - (-58) mm	-51.7 mm	Yes
Internal Hysteresis	69 - 85 %	76.8 %	Yes

**Test meets specifications.**

**Condition:** Used

**Comments:**

**Jacket S/N:** DZ8735

**Rib Set S/N:** EB7630

Specification Source: CFR49 Part 572 Subpart O  
with Polarity in accordance with J211

Page 19 of 28

12.03.2019 11:18:00 387




## Transportation Research Center Inc.

Front Thorax

HIII 5th Serial No. EB7513 Certification No. 9-1


Test Date: 12/3/2019

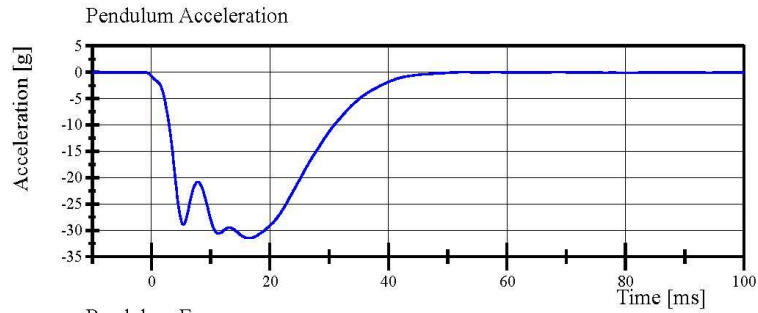

Filter Class: CFC\_180

Max: 0.1 g at 52.6 ms


Min: -31.5 g at 16.5 ms

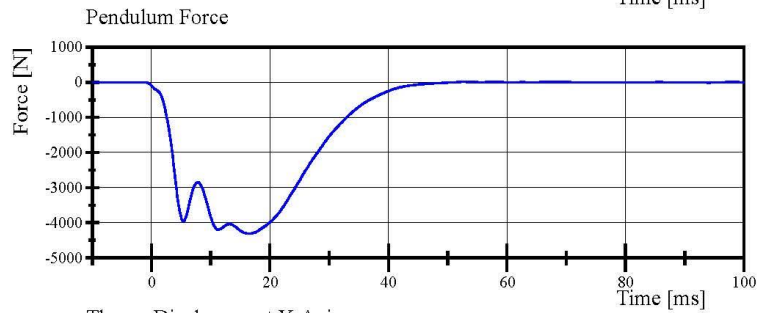

Filter Class: CFC\_180

Max: 11.4 N at 52.6 ms


Min: -4,311.3 N at 16.5 ms

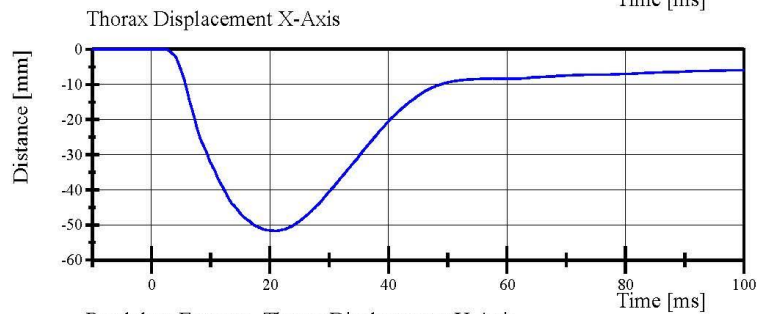

Filter Class: CFC\_600

Max: 0.0 mm at -9.8 ms

Min: -51.7 mm at 21.0 ms

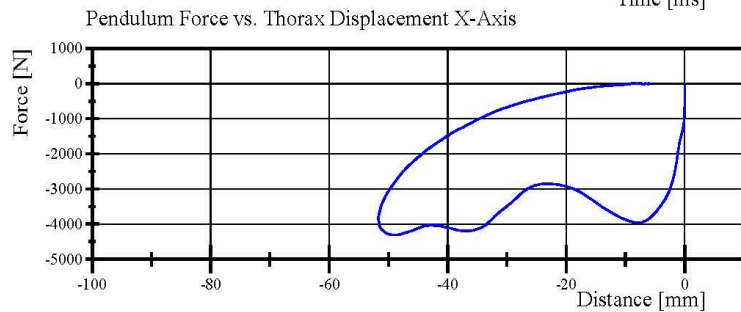

Filter Class: CFC\_180

Max: 11.4 N at -8.7 mm

Min: -4,311.3 N at -48.9 mm

Specification Source: CFR49 Part 572 Subpart O  
with Polarity in accordance with J211

12.03.2019 11:18:54 387




# Transportation Research Center Inc.

Hybrid III Small Female Torso Flexion



Customer: NHTSA  
 Serial Number: EB7513 Date: 12/3/2019  
 Test Number: 1 Time: 13:41

TEST PARAMETER	SPECIFICATION		TEST RESULTS		
Temperature	18.9	- 25.6	21.6	°C	Pass
Humidity	10	- 70	40	%	Pass
Average Angular Velocity	0.5	- 1.5	0.95	deg/sec	Pass
Initial Angle	0	- 20	15.27	deg	Pass
Peak Force at 45.29°	320	- 390	327.54	N	Pass
Final Angle	-8	- 8	4.08	deg	Pass

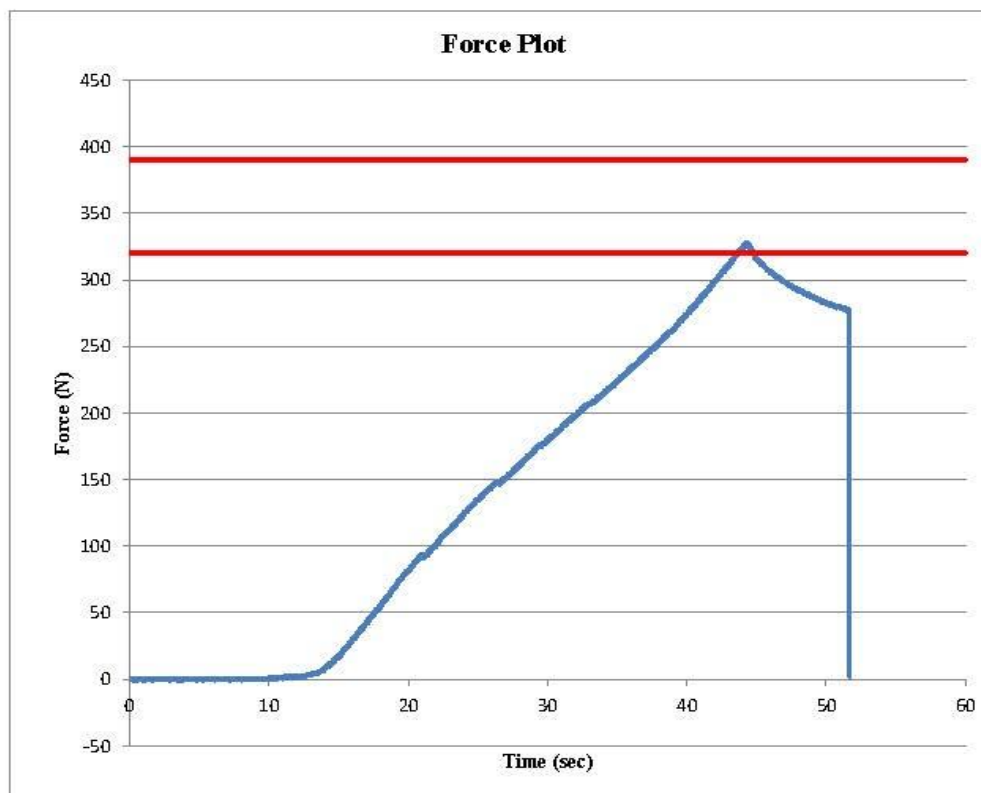

Comments:  
 Abdomen S/N: EB8206  
 Lumbar S/N: N/A

## Transportation Research Center Inc.

Left Knee Femur Response Test  
HIII 5th Serial No. EB7513 Certification No. 9-1  
Test Date: 12/3/2019

Test Parameter	Specification	Test Results	Pass
Temperature	18.9 - 25.6 °C	21.4 °C	Yes
Relative Humidity	10 - 70 %	38 %	Yes
Probe Velocity	2.07 - 2.13 m/s	2.120 m/s	Yes
Peak Femur Force	(-3,450) - (-4,060) N	-3,936.5 N	Yes

**Test meets specifications.**

**Condition: Used**

**Comments:**

**Knee Skin S/N: EB7773**

Specification Source: CFR49 Part 572 Subpart O  
with Polarity in accordance with J211

Page 22 of 28


12.03.2019 08:23:49 1889






## Transportation Research Center Inc.

Left Knee Femur Response Test  
HIII 5th Serial No. EB7513 Certification No. 9-1  
Test Date: 12/3/2019

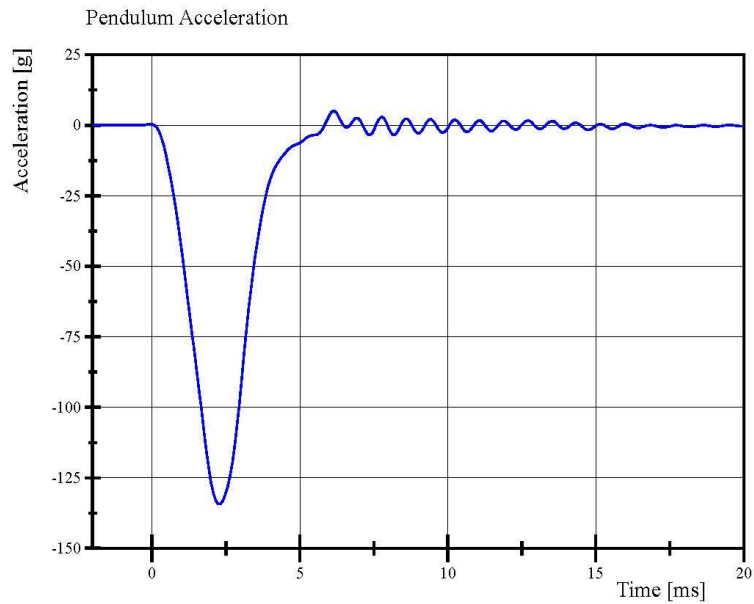

Filter Class: CFC\_600  
Max: 5.2 g at 6.2 ms  
Min: -134.3 g at 2.2 ms

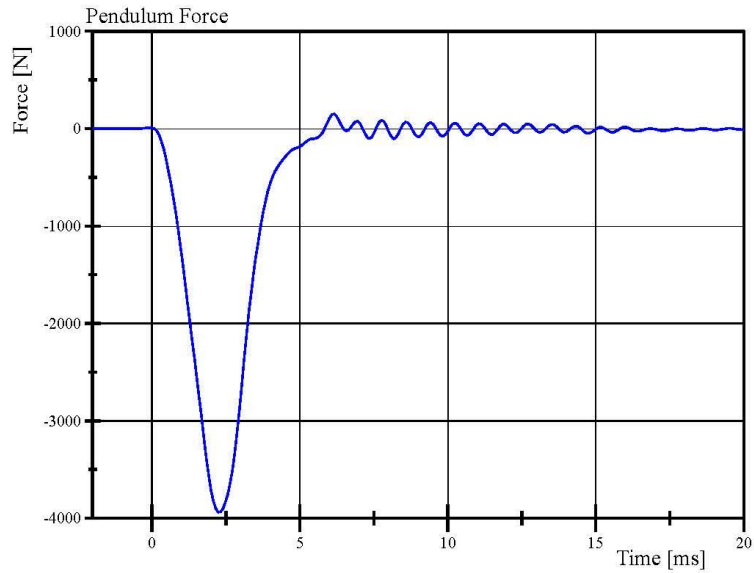

Filter Class: CFC\_600  
Max: 151.4 N at 6.2 ms  
Min: -3,936.5 N at 2.2 ms

Specification Source: CFR49 Part 572 Subpart O  
with Polarity in accordance with J211

12.03.2019 08:24:22 1889



## Transportation Research Center Inc.

Right Knee Femur Response Test  
HIII 5th Serial No. EB7513 Certification No. 9-1  
Test Date: 12/3/2019

Test Parameter	Specification	Test Results	Pass
Temperature	18.9 - 25.6 °C	21.5 °C	Yes
Relative Humidity	10 - 70 %	38 %	Yes
Probe Velocity	2.07 - 2.13 m/s	2.121 m/s	Yes
Peak Femur Force	(-3,450) - (-4,060) N	-3,917.0 N	Yes

**Test meets specifications.**

**Condition: Used**

**Comments:**

**Knee Skin S/N: EB7550**

Specification Source: CFR49 Part 572 Subpart O  
with Polarity in accordance with J211


Page 24 of 28

12.03.2019 08:30:29 1890




## Transportation Research Center Inc.

Right Knee Femur Response Test  
HIII 5th Serial No. EB7513 Certification No. 9-1  
Test Date: 12/3/2019

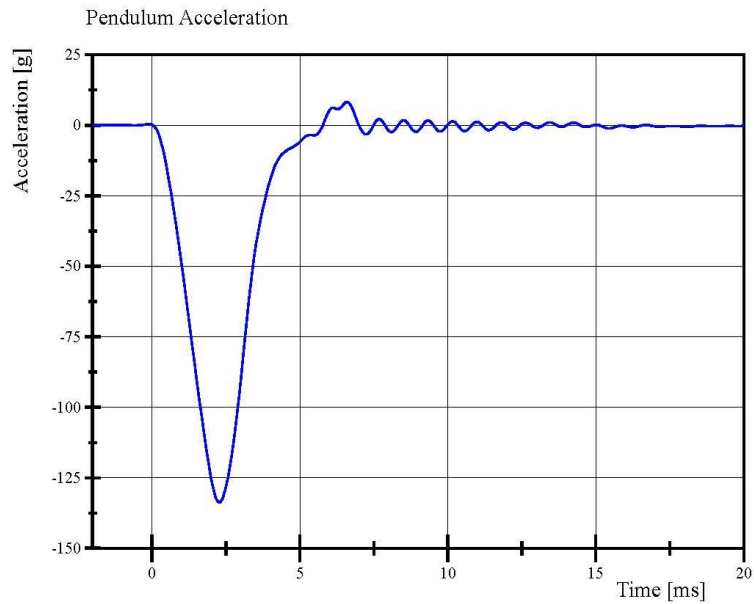

Filter Class: CFC\_600  
Max: 8.3 g at 6.6 ms  
Min: -133.6 g at 2.2 ms

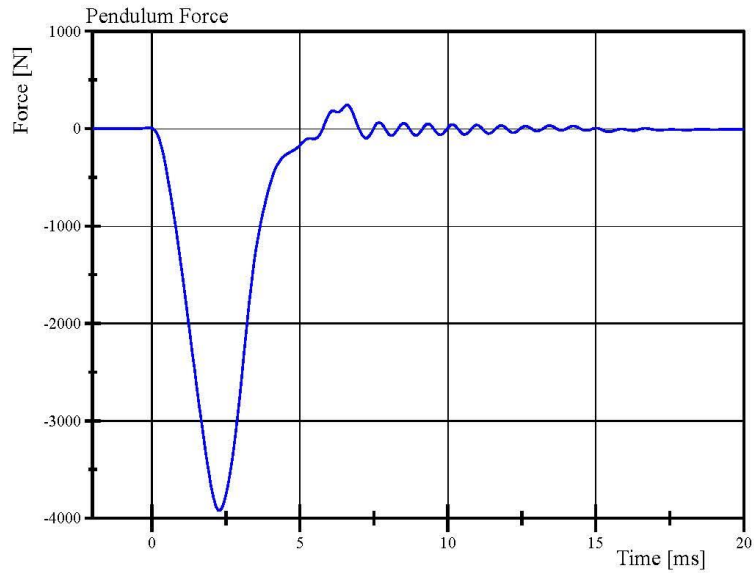

Filter Class: CFC\_600  
Max: 242.3 N at 6.6 ms  
Min: -3,917.0 N at 2.2 ms

Specification Source: CFR49 Part 572 Subpart O  
with Polarity in accordance with J211

12.03.2019 08:30:59 1890



**Post-Test Calibration Sheets**

**Front Passenger S/N EB7513**

**Transportation Research Center Inc.**  
**5720 HIII 5th Dummy**  
**External Dimensions**  
**Serial No. EB7513 Calibration No. 10**

Symbol	Description	Specification	Results	Pass
		mm	mm	
A	Total Sitting Height	774.7 - 800.1	779	Yes
B	Shoulder Pivot Height	431.8 - 457.2	443	Yes
C	Hip Pivot Height	81.3 - 86.3	85	Yes
D	Hip Pivot from Backline	144.8 - 149.8	148	Yes
E	Shoulder Pivot from Backline	68.6 - 83.8	79	Yes
F	Thigh Clearance	119.4 - 134.6	130	Yes
G	Back of Elbow to Wrist Pivot	243.9 - 259.1	249	Yes
H	Head Back to Backline	43.2 - 48.2	45	Yes
I	Shoulder to Elbow Length	276.8 - 297.2	286	Yes
J	Elbow Rest Height	182.8 - 203.2	197	Yes
K	Buttock Knee Length	520.7 - 546.1	533	Yes
L	Popliteal Height	355.6 - 376.0	359	Yes
M	Knee Pivot Height	393.7 - 419.1	409	Yes
N	Buttock Popliteal Length	414.0 - 439.4	430	Yes
O	Chest Depth without Jacket	175.3 - 190.5	182	Yes
P	Foot Length	218.5 - 233.7	225	Yes
R	Buttock to Knee Pivot Length	457.2 - 482.6	473	Yes
S	Head Breadth	137.1 - 147.3	141	Yes
T	Head Depth	177.8 - 188.0	180	Yes
U	Hip Breadth	299.7 - 314.9	306	Yes
V	Shoulder Breadth	350.5 - 365.7	356	Yes
W	Foot Breadth	78.8 - 94.0	85	Yes
X	Head Circumference	528.3 - 548.7	539	Yes
Y	Chest Circumference with Jacket	850.9 - 881.3	867	Yes
Z	Waist Circumference	759.5 - 789.9	775	Yes
AA	Reference Location for Chest Circumference	332.7 - 358.1	345	Yes
BB	Reference Location for Waist Circumference	160.0 - 170.2	164	Yes

Revised 8/10/12





## Transportation Research Center Inc.

Front Head Drop

HIII 5th Serial No. EB7513 Certification No. 10-1

Test Date: 12/13/2019

Test Parameter	Specification	Test Results	Pass
Temperature	18.9 - 25.5 °C	21.3 °C	Yes
Relative Humidity	10 - 70 %	38 %	Yes
Peak Head Resultant Acceleration	250 - 300 g	269.7 g	Yes
Peak Head Lateral Acceleration	(-15) - 15 g	3.2 g	Yes
Is Acceleration Curve Unimodal within 10% of Peak?	< 10 %	2.14 %	Yes

**Test meets specifications.**

**Condition: Used**

**Comments:**

**Head Skin S/N: EA8751**

Specification Source: CFR49 Part 572 Subpart O  
with Polarity in accordance with J211

Page 9 of 28

12.13.2019 07:33:29 578




## Transportation Research Center Inc.

Front Head Drop

HIII 5th Serial No. EB7513 Certification No. 10-1


Test Date: 12/13/2019

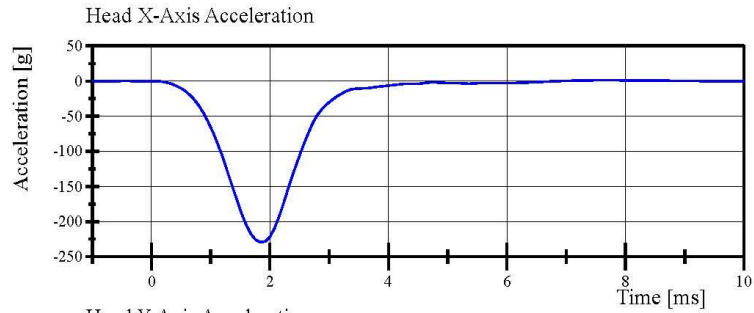

Filter Class: CFC\_1000

Max: 1.5 g at 7.6 ms


Min: -229.5 g at 1.8 ms

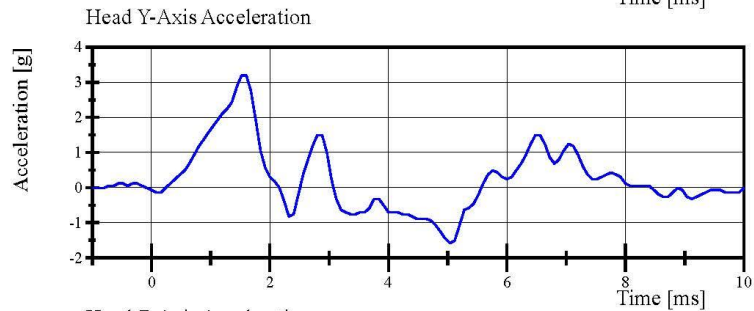

Filter Class: CFC\_1000

Max: 3.2 g at 1.5 ms


Min: -1.6 g at 5.0 ms

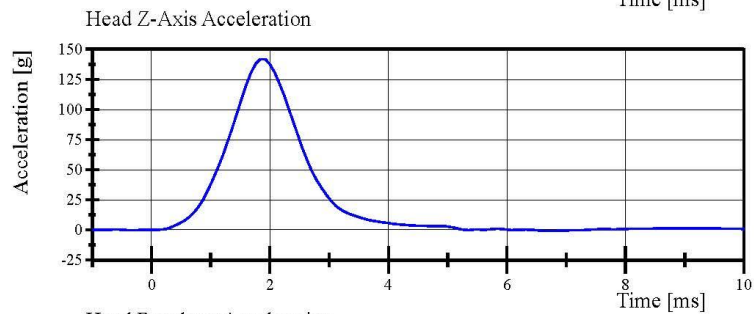

Filter Class: CFC\_1000

Max: 141.8 g at 1.8 ms

Min: -0.8 g at 6.6 ms

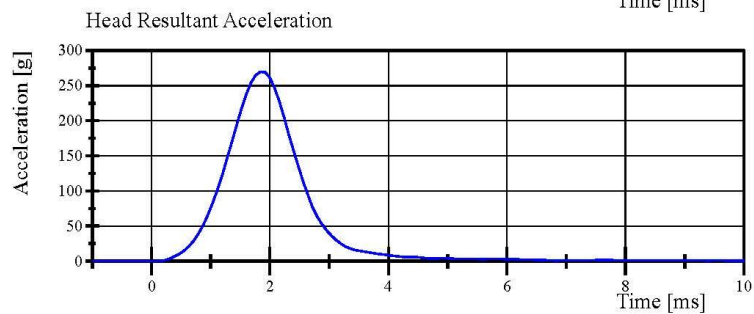

Filter Class: CFC\_1000

Max: 269.7 g at 1.8 ms

Min: 0.0 g at -1.0 ms

Specification Source: CFR49 Part 572 Subpart O  
with Polarity in accordance with J211

12.13.2019 07:33:55 578



## Transportation Research Center Inc.

Neck Flexion

HIII 5th Serial No. EB7513 Certification No. 10-1

Test Date: 12/13/2019

Test Parameter	Specification	Test Results	Pass
Temperature	20.6 - 22.2 °C	21.2 °C	Yes
Relative Humidity	10 - 70 %	39 %	Yes
Pendulum Velocity	6.89 - 7.13 m/s	7.072 m/s	Yes
Pendulum Integrated Velocity Change at 10ms	(-2.1) - (-2.5) m/s	-2.49 m/s	Yes
Pendulum Integrated Velocity Change at 20ms	(-4.0) - (-5.0) m/s	-4.91 m/s	Yes
Pendulum Integrated Velocity Change at 30ms	(-5.8) - (-7.0) m/s	-6.94 m/s	Yes
Total Head D-Plane Rotation	(-77) - (-91) °	-83.8 °	Yes
Total Neck Occipital Condyles Moment Between -77° and -91° Rotation	69 - 83 N·m	77.7 N·m	Yes
Total Neck Occipital Condyles Moment Decay to 10 N·m	80 - 100 ms	86.6 ms	Yes

**Test meets specifications.**

**Condition:** Used

**Comments:**

**Neck S/N:** EB6930

Specification Source: CFR49 Part 572 Subpart O  
with Polarity in accordance with J211

12.16.2019 14:14:09 1820




Page 11 of 28

## Transportation Research Center Inc.

Neck Flexion

HIII 5th Serial No. EB7513 Certification No. 10-1


Test Date: 12/13/2019

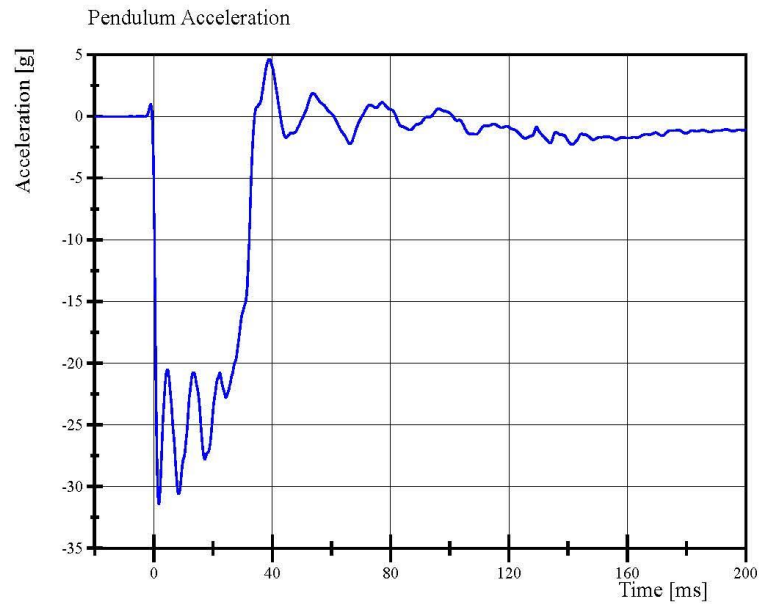

Filter Class: CFC\_180

Max: 4.6 g at 39.0 ms

Min: -31.4 g at 1.7 ms

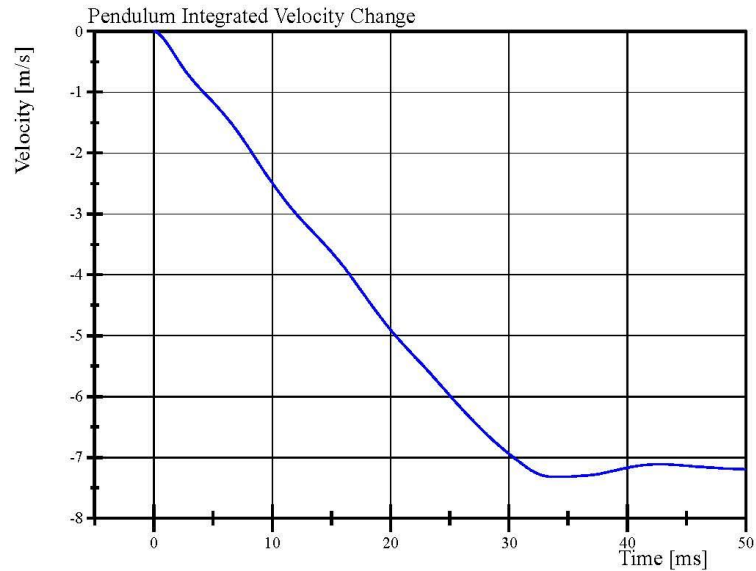

Filter Class: CFC\_180

Max: 0.0 m/s at 0.0 ms

Min: -7.3 m/s at 34.1 ms

Specification Source: CFR49 Part 572 Subpart O  
with Polarity in accordance with J211

12.16.2019 14:14:35 1820




## Transportation Research Center Inc.

Neck Flexion

HIII 5th Serial No. EB7513 Certification No. 10-1


Test Date: 12/13/2019

Pot Rotation at the Base of Neck

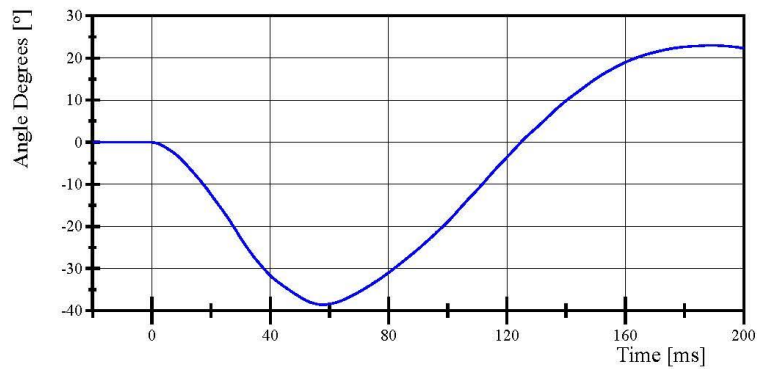


Filter Class: CFC\_60  
Max: 23.0 ° at 189.1 ms  
Min: -38.5 ° at 57.8 ms

Head Rotation at Occypital Condyles

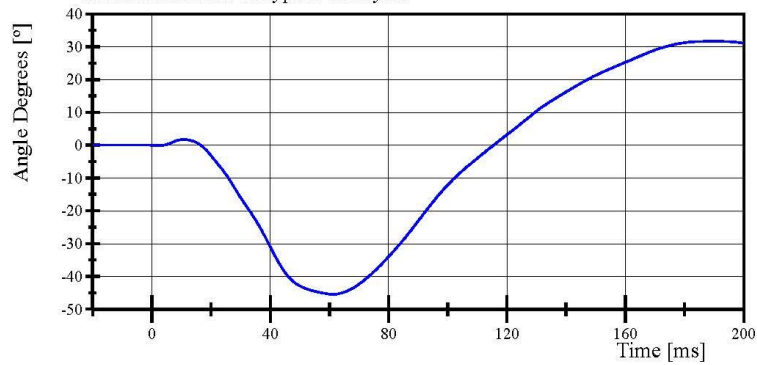

Filter Class: CFC\_60  
Max: 31.8 ° at 189.8 ms  
Min: -45.4 ° at 61.2 ms

Total Head D-Plane Rotation

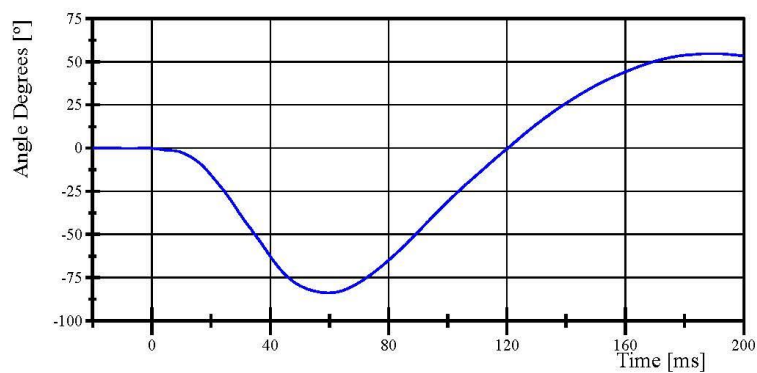

Filter Class: CFC\_60  
Max: 54.7 ° at 189.4 ms  
Min: -83.8 ° at 59.7 ms

Specification Source: CFR49 Part 572 Subpart O  
with Polarity in accordance with J211

12.16.2019 14:14:36 1820









## Transportation Research Center Inc.

Neck Flexion

HIII 5th Serial No. EB7513 Certification No. 10-1

Test Date: 12/13/2019

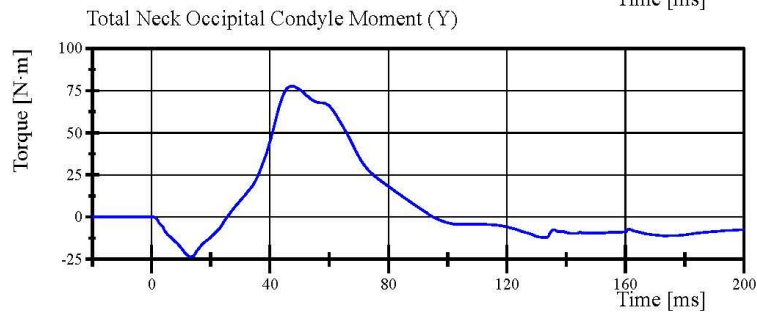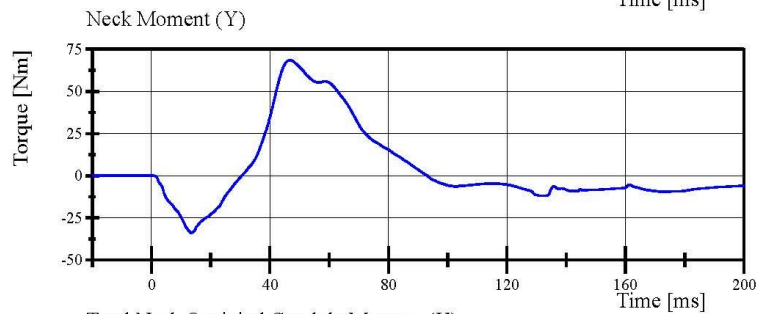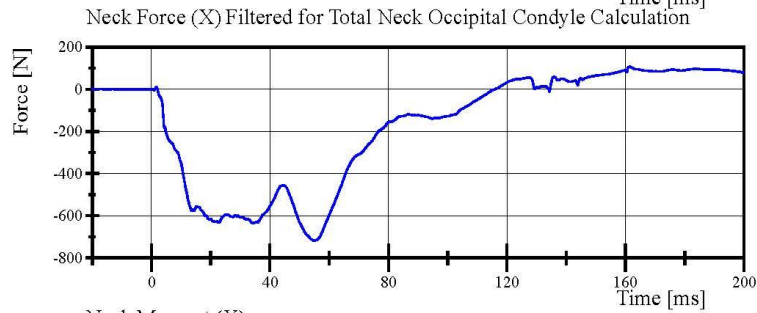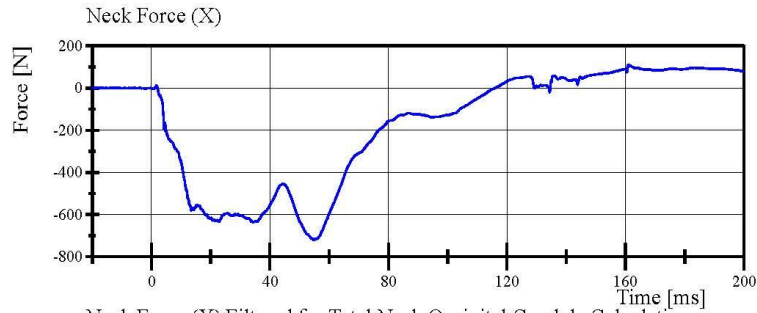

Specification Source: CFR49 Part 572 Subpart O  
with Polarity in accordance with J211

12.16.2019 14:14:36 1820



## Transportation Research Center Inc.

Neck Extension

HIII 5th Serial No. EB7513 Certification No. 10-2

Test Date: 12/16/2019

Test Parameter	Specification	Test Results	Pass
Temperature	20.6 - 22.2 °C	21.3 °C	Yes
Relative Humidity	10 - 70 %	40 %	Yes
Pendulum Velocity	(-5.95) - (-6.19) m/s	-6.041 m/s	Yes
Pendulum Integrated Velocity Change at 10ms	1.5 - 1.9 m/s	1.86 m/s	Yes
Pendulum Integrated Velocity Change at 20ms	3.1 - 3.9 m/s	3.71 m/s	Yes
Pendulum Integrated Velocity Change at 30ms	4.6 - 5.6 m/s	5.41 m/s	Yes
Total Head D-Plane Rotation	99 - 114 °	112.2 °	Yes
Total Neck Occipital Condyles Moment Between 99° and 114° Rotation	(-53) - (-65) N·m	-60.6 N·m	Yes
Total Neck Occipital Condyles Moment Decay to -10 N·m	94 - 114 ms	104.1 ms	Yes

**Test meets specifications.**

**Condition:** Used

**Comments:**

**Neck S/N:** EB6930

Specification Source: CFR49 Part 572 Subpart O  
with Polarity in accordance with J211

Page 15 of 28

12.16.2019 14:10:46 1971




## Transportation Research Center Inc.

Neck Extension

HIII 5th Serial No. EB7513 Certification No. 10-2


Test Date: 12/16/2019

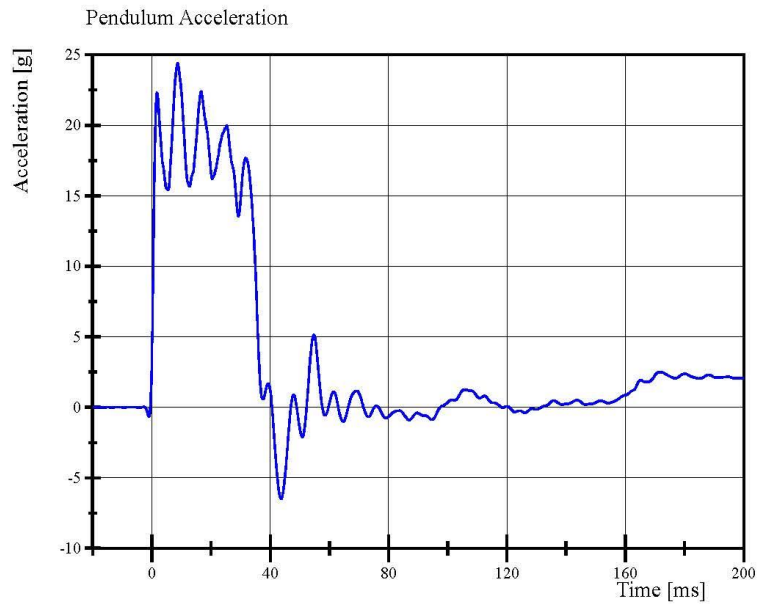

Filter Class: CFC\_180

Max: 24.4 g at 8.7 ms

Min: -6.5 g at 43.7 ms

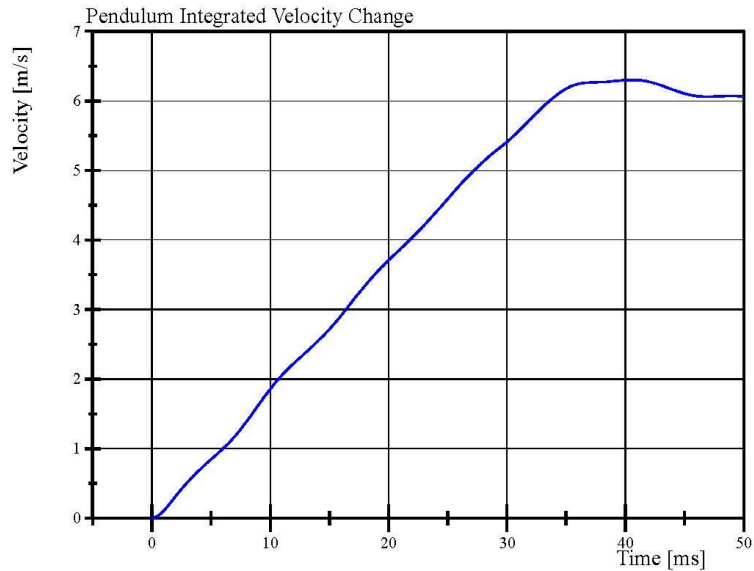

Filter Class: CFC\_180

Max: 6.3 m/s at 40.6 ms

Min: 0.0 m/s at 0.0 ms

Specification Source: CFR49 Part 572 Subpart O  
with Polarity in accordance with J211

12.16.2019 14:11:35 1971




## Transportation Research Center Inc.

Neck Extension

HIII 5th Serial No. EB7513 Certification No. 10-2


Test Date: 12/16/2019

Pot Rotation at the Base of Neck

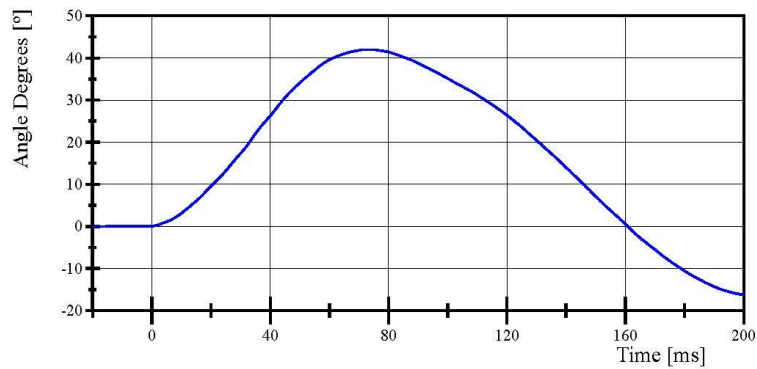


Filter Class: CFC\_60  
Max: 42.0 ° at 72.9 ms  
Min: -16.3 ° at 200.0 ms

Head Rotation at Occypital Condyles

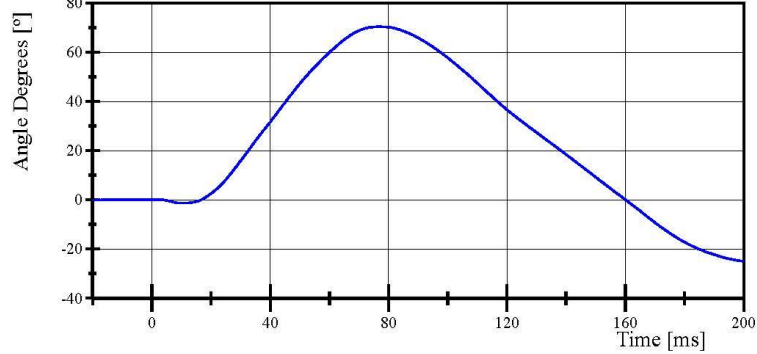

Filter Class: CFC\_60  
Max: 70.3 ° at 76.8 ms  
Min: -25.0 ° at 200.0 ms

Total Head D-Plane Rotation

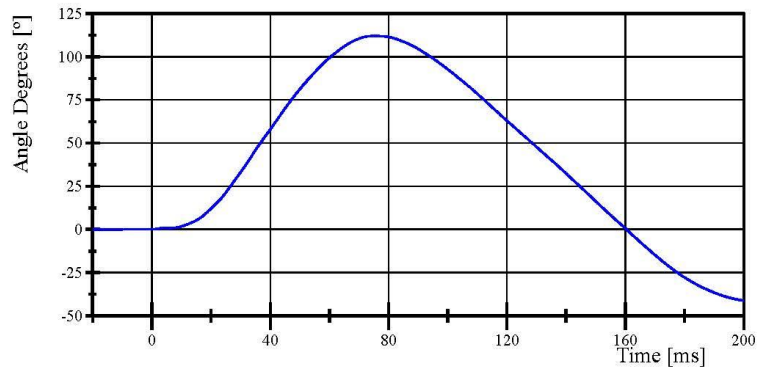

Filter Class: CFC\_60  
Max: 112.2 ° at 75.4 ms  
Min: -41.3 ° at 200.0 ms

Specification Source: CFR49 Part 572 Subpart O  
with Polarity in accordance with J211

12.16.2019 14:11:35 1971




## Transportation Research Center Inc.


Neck Extension

HIII 5th Serial No. EB7513 Certification No. 10-2


Test Date: 12/16/2019

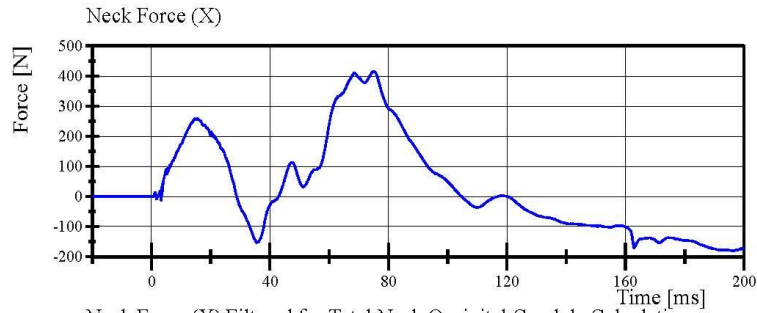


Filter Class: CFC\_1000  
Max: 415.6 N at 74.9 ms  
Min: -179.5 N at 195.9 ms

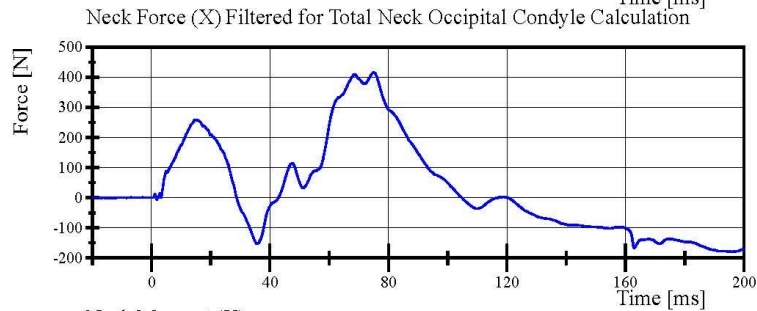

Filter Class: CFC\_600  
Max: 415.3 N at 74.9 ms  
Min: -179.4 N at 196.0 ms

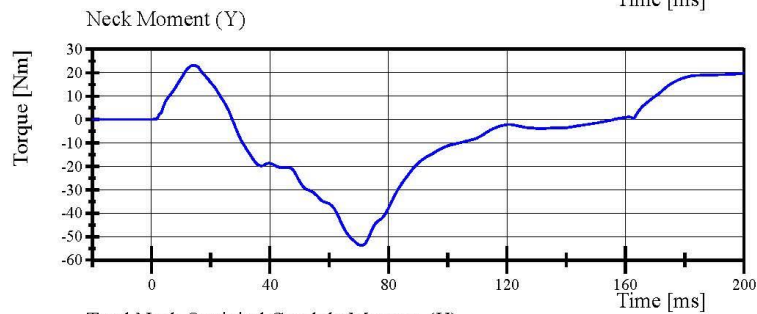

Filter Class: CFC\_600  
Max: 23.2 Nm at 14.4 ms  
Min: -53.7 Nm at 71.1 ms

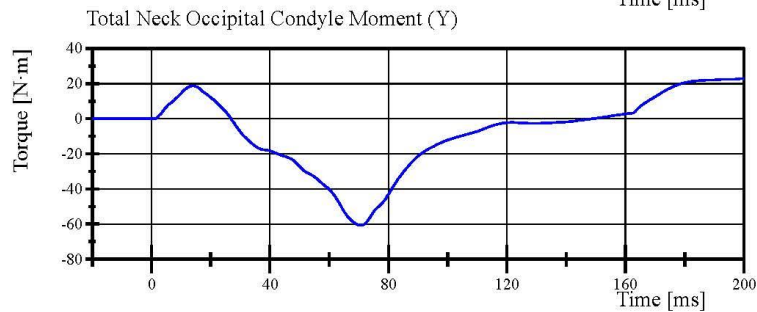

Filter Class: Without\_(Constar  
Max: 22.9 N·m at 200.0 ms  
Min: -60.6 N·m at 70.7 ms

Specification Source: CFR49 Part 572 Subpart O  
with Polarity in accordance with J211

12.16.2019 14:11:36 1971





## Transportation Research Center Inc.

Front Thorax

HIII 5th Serial No. EB7513 Certification No. 10-1

Test Date: 12/16/2019

Test Parameter	Specification	Test Results	Pass
Temperature	20.6 - 22.2 °C	21.5 °C	Yes
Relative Humidity	10 - 70 %	39 %	Yes
Probe Velocity	6.59 - 6.83 m/s	6.789 m/s	Yes
Probe Force Peak Between 50.0 mm and 58.0 mm Chest Deflection	(-3,900) - (-4,400) N	-4,344.2 N	Yes
Probe Force Peak Between 18.0 mm and 50.0 mm Chest Deflection	>= (-4,600) N	-4,419.3 N	Yes
Maximum Chest Compression	(-50) - (-58) mm	-50.8 mm	Yes
Internal Hysteresis	69 - 85 %	76.2 %	Yes

**Test meets specifications.**

**Condition:** Used

**Comments:**

**Jacket S/N:** DZ8735

**Rib Set S/N:** EB7630

Specification Source: CFR49 Part 572 Subpart O  
with Polarity in accordance with J211

Page 19 of 28

12.16.2019 16:14:26 368




## Transportation Research Center Inc.

Front Thorax

HIII 5th Serial No. EB7513 Certification No. 10-1


Test Date: 12/16/2019

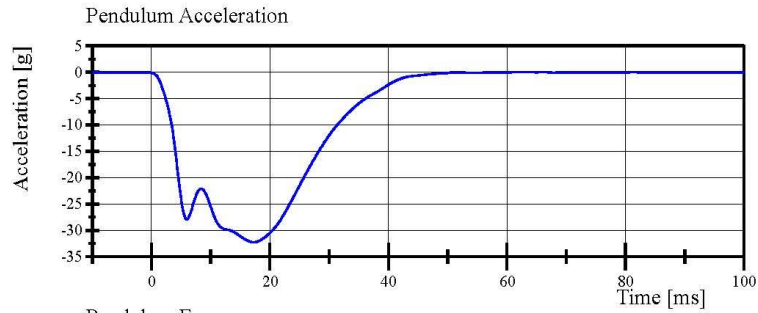

Filter Class: CFC\_180

Max: 0.1 g at 66.2 ms


Min: -32.3 g at 17.3 ms

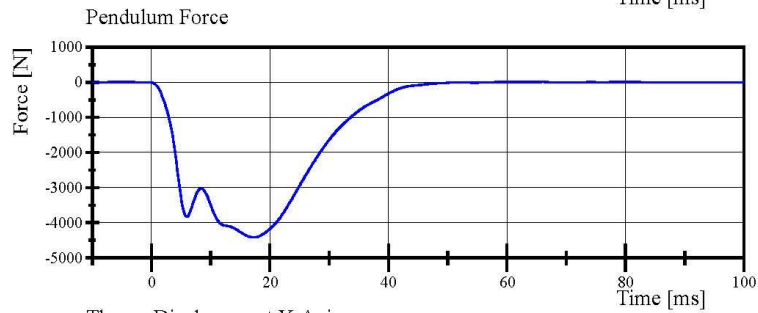

Filter Class: CFC\_180

Max: 11.2 N at 66.2 ms


Min: -4,419.3 N at 17.3 ms

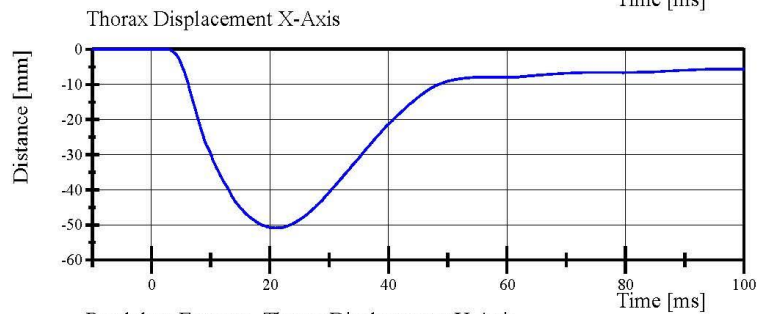

Filter Class: CFC\_600

Max: 0.0 mm at -7.5 ms

Min: -50.8 mm at 21.0 ms

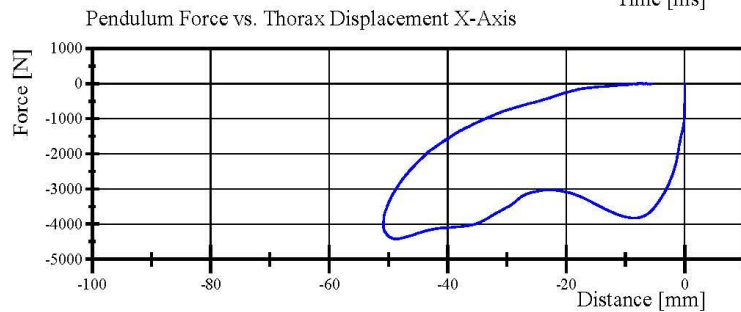

Filter Class: CFC\_180

Max: 11.2 N at -7.3 mm

Min: -4,419.3 N at -48.6 mm

Specification Source: CFR49 Part 572 Subpart O  
with Polarity in accordance with J211

12.16.2019 16:16:37 368




# Transportation Research Center Inc.

Hybrid III Small Female Torso Flexion



Customer: NHTSA  
 Serial Number: EB7513 Date: 12/17/2019  
 Test Number: 1 Time: 8:25

TEST PARAMETER	SPECIFICATION		TEST RESULTS		
Temperature	18.9	- 25.6	21.4	°C	Pass
Humidity	10	- 70	24	%	Pass
Average Angular Velocity	0.5	- 1.5	0.9	deg/sec	Pass
Initial Angle	0	- 20	11.19	deg	Pass
Peak Force at 45.18°	320	- 390	322.18	N	Pass
Final Angle	-8	- 8	6.07	deg	Pass

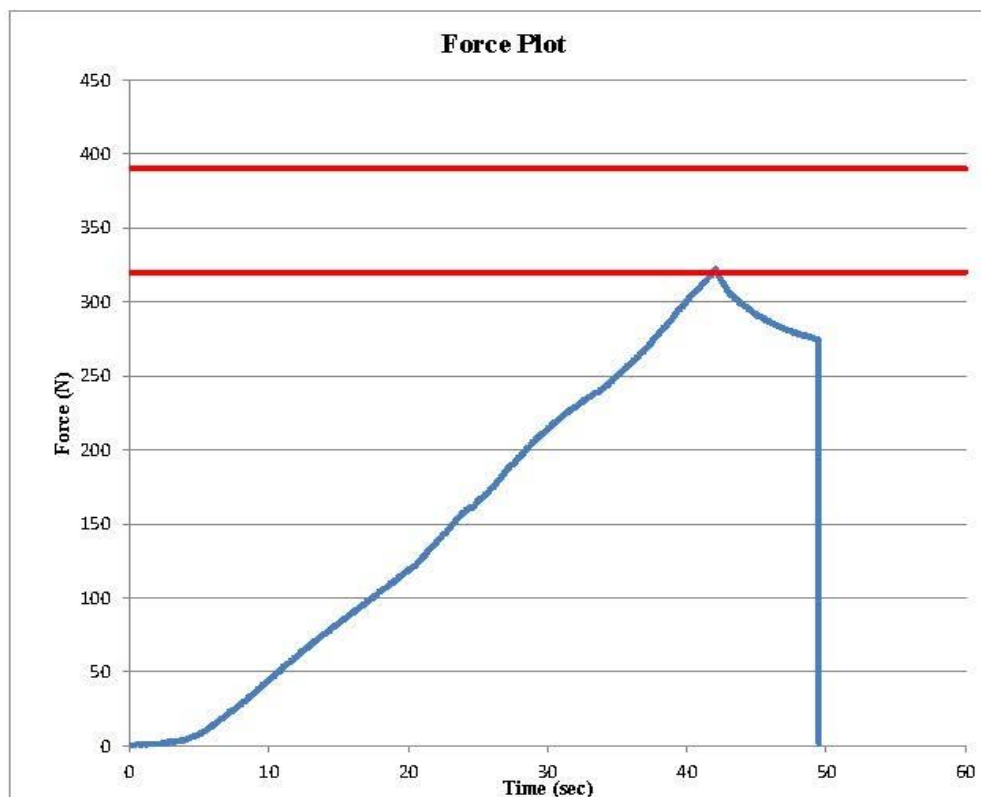

Comments:  
 Abdomen S/N: EB8206  
 Lumbar S/N: N/A

## Transportation Research Center Inc.

Left Knee Femur Response Test  
HIII 5th Serial No. EB7513 Certification No. 10-1  
Test Date: 12/13/2019

Test Parameter	Specification	Test Results	Pass
Temperature	18.9 - 25.6 °C	21.2 °C	Yes
Relative Humidity	10 - 70 %	39 %	Yes
Probe Velocity	2.07 - 2.13 m/s	2.120 m/s	Yes
Peak Femur Force	(-3,450) - (-4,060) N	-3,749.3 N	Yes

**Test meets specifications.**

**Condition: Used**

**Comments:**

**Knee Skin S/N: EB7773**

Specification Source: CFR49 Part 572 Subpart O  
with Polarity in accordance with J211


Page 22 of 28

12.13.2019 07:47:39 1799




## Transportation Research Center Inc.

Left Knee Femur Response Test  
HIII 5th Serial No. EB7513 Certification No. 10-1  
Test Date: 12/13/2019

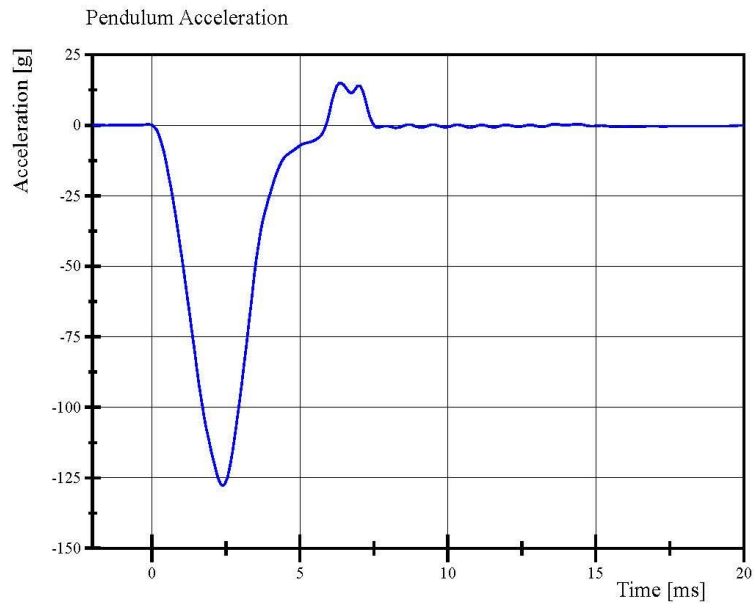

Filter Class: CFC\_600  
Max: 15.0 g at 6.4 ms  
Min: -127.9 g at 2.4 ms

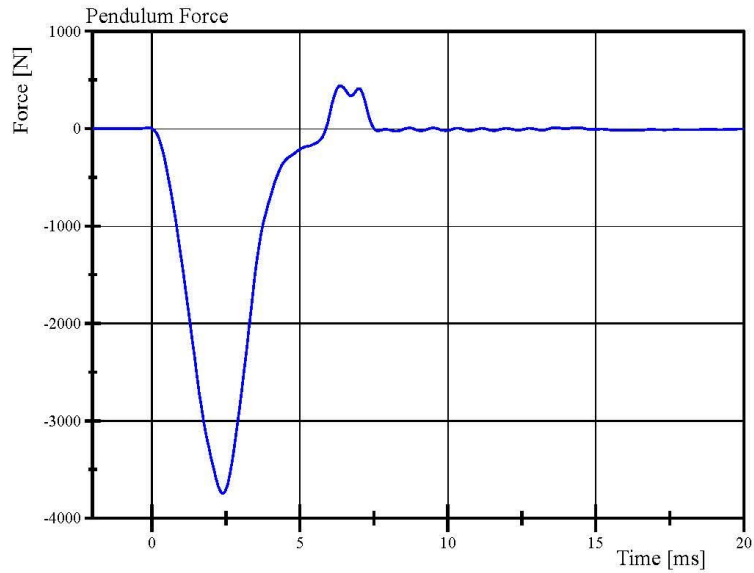

Filter Class: CFC\_600  
Max: 438.5 N at 6.4 ms  
Min: -3,749.3 N at 2.4 ms

Specification Source: CFR49 Part 572 Subpart O  
with Polarity in accordance with J211

12.13.2019 07:48:17 1799





## Transportation Research Center Inc.

Right Knee Femur Response Test  
HIII 5th Serial No. EB7513 Certification No. 10-1  
Test Date: 12/13/2019

Test Parameter	Specification	Test Results	Pass
Temperature	18.9 - 25.6 °C	21.2 °C	Yes
Relative Humidity	10 - 70 %	39 %	Yes
Probe Velocity	2.07 - 2.13 m/s	2.121 m/s	Yes
Peak Femur Force	(-3,450) - (-4,060) N	-3,867.4 N	Yes

**Test meets specifications.**

**Condition: Used**

**Comments:**

**Knee Skin S/N: EB7550**

Specification Source: CFR49 Part 572 Subpart O  
with Polarity in accordance with J211


Page 24 of 28

12.13.2019 07:50:23 1798




## Transportation Research Center Inc.

Right Knee Femur Response Test  
HIII 5th Serial No. EB7513 Certification No. 10-1  
Test Date: 12/13/2019

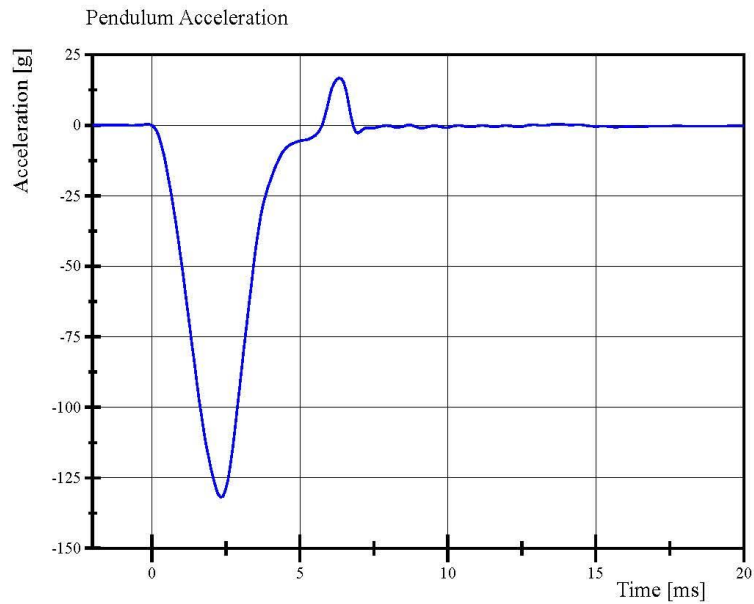

Filter Class: CFC\_600  
Max: 16.7 g at 6.3 ms  
Min: -131.9 g at 2.3 ms

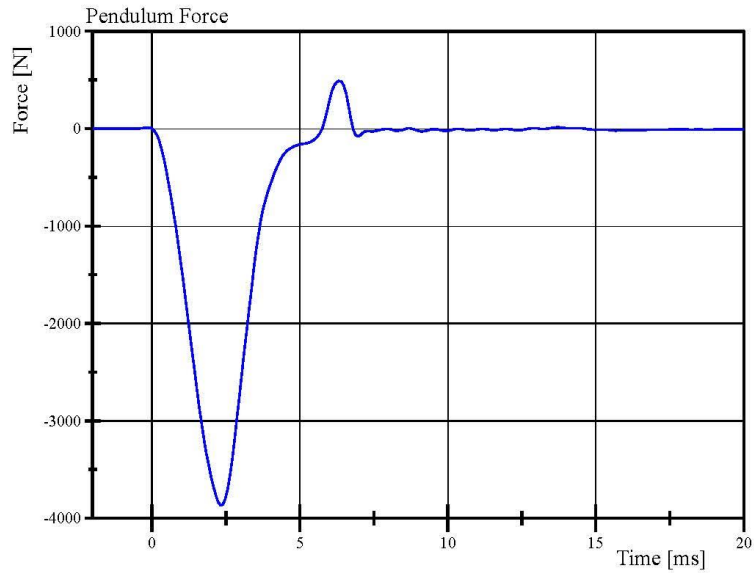

Filter Class: CFC\_600  
Max: 489.0 N at 6.3 ms  
Min: -3,867.4 N at 2.3 ms

Specification Source: CFR49 Part 572 Subpart O  
with Polarity in accordance with J211

12.13.2019 07:50:54 1798



**APPENDIX D**  
**TEST EQUIPMENT AND INSTRUMENTATION CALIBRATION**

**TABLE 1 – Driver Dummy Instrumentation**

Instrumentation			Axis/Location	Hybrid III 50th S/N 037			
				Serial Number	Manufacturer	Calibration Date	
Head Accelerometers	Primary		X	T10650	Endevco	20-Aug-2019	
			Y	P94650	Endevco	20-Aug-2019	
			Z	P94622	Endevco	20-Aug-2019	
	Redundant		X	P94431	Endevco	20-Aug-2019	
			Y	P94487	Endevco	20-Aug-2019	
			Z	P94645	Endevco	20-Aug-2019	
Head Angular Rate Sensors			X	ARS14945	DTS	15-Oct-2018	
			Y	ARS14946	DTS	15-Oct-2018	
			Z	ARS14947	DTS	15-Oct-2018	
Upper Neck Load Cell			FX, FY, FZ, MX, MY, MZ	2021	Humanetics	1-Mar-2019	
Chest Accelerometers	Primary		X	P87834	Endevco	20-Aug-2019	
			Y	P61255	Endevco	20-Aug-2019	
			Z	P45008	Endevco	20-Aug-2019	
	Redundant		X	P91177	Endevco	20-Aug-2019	
			Y	P94570	Endevco	20-Aug-2019	
			Z	P91172	Endevco	20-Aug-2019	
Chest Potentiometer			X	CST037	Servo	5-Mar-2019	
Pelvis Accelerometers				X	P91185	Endevco	19-Aug-2019
				Y	P91876	Endevco	19-Aug-2019
				Z	T11390	Endevco	19-Aug-2019
Femur Load Cells	Left	Primary	Z	DI4215-FZ1	Denton	1-Mar-2019	
		Redundant	Z	DI4215-FZ2	Denton	1-Mar-2019	
	Right	Primary	Z	DI4216-FZ1	Denton	1-Mar-2019	
		Redundant	Z	DI4216-FZ2	Denton	1-Mar-2019	
Tibia Load Cells	Left	Upper	MX, MY, FZ	3643-94	Denton	1-Mar-2019	
		Lower	MX, MY, FZ	3644-370	Denton	1-Mar-2019	
	Right	Upper	MX, MY, FZ	3643-413	Denton	1-Mar-2019	
		Lower	MX, MY, FZ	3644-401	Denton	1-Mar-2019	
Foot Accelerometers	Left	Rear	X	P90848	Endevco	20-Aug-2019	
			Z	P91498	Endevco	20-Aug-2019	
		Front	Z	P90841	Endevco	20-Aug-2019	
	Right	Rear	X	P93467	Endevco	20-Aug-2019	
			Z	P97619	Endevco	20-Aug-2019	
		Front	Z	P94523	Endevco	20-Aug-2019	
Seat Belt Load Cells		Lap	N/A	R141C9	Measurement Specialties	7-May-2019	
		Shoulder	N/A	X08011	Measurement Specialties	7-May-2019	

**TABLE 2 – Front Passenger Dummy Instrumentation**

Instrumentation			Axis/Location	Hybrid III 5th S/N EB7513		
				Serial Number	Manufacturer	Calibration Date
Head Accelerometers	Primary		X	P44972	Endevco	22-Aug-2019
			Y	P80217	Endevco	12-Jun-2019
			Z	P69062	Endevco	21-Aug-2019
	Redundant		X	T11046	Endevco	22-Aug-2019
			Y	P97525	Endevco	22-Aug-2019
			Z	P73228	Endevco	22-Aug-2019
Head Angular Rate Sensors			X	ARS14944	DTS	15-Oct-2018
			Y	ARS14937	DTS	15-Oct-2018
			Z	ARS14938	DTS	15-Oct-2018
Upper Neck Load Cell		FX, FY, FZ, MX, MY, MZ	1634	Humanetics	27-Feb-2019	
Chest Accelerometers	Primary		X	P80855	Endevco	21-Aug-2019
			Y	P97544	Endevco	22-Aug-2019
			Z	P57791	Endevco	12-Jun-2019
	Redundant		X	P73221	Endevco	21-Aug-2019
			Y	P69097	Endevco	21-Aug-2019
			Z	P69074	Endevco	21-Aug-2019
Chest Potentiometer		X	4223	Servo	21-Aug-2019	
Pelvis Accelerometers			X	P91969	Endevco	22-Aug-2019
			Y	P91958	Endevco	22-Aug-2019
			Z	P80721	Endevco	22-Aug-2019
Femur Load Cells	Left	Primary	Z	DT0997-FZ1	Humanetics	27-Feb-2019
		Redundant	Z	DT0997-FZ2	Humanetics	27-Feb-2019
	Right	Primary	Z	DS4140-FZ1	Humanetics	27-Feb-2019
		Redundant	Z	DS4140-FZ2	Humanetics	27-Feb-2019
Tibia Load Cells	Left	Upper	MX, MY, FZ	3643-92	Denton	1-Oct-2018
		Lower	MX, MY, FZ	3644-92	Denton	1-Oct-2018
	Right	Upper	MX, MY, FZ	3643-484	Denton	1-Oct-2018
		Lower	MX, MY, FZ	3644-369	Denton	1-Oct-2018
Foot Accelerometers	Left	Rear	X	P90866	Endevco	21-Aug-2019
			Z	T11451	Endevco	21-Aug-2019
		Front	Z	P97890	Endevco	21-Aug-2019
	Right	Rear	X	P97640	Endevco	21-Aug-2019
			Z	P91471	Endevco	21-Aug-2019
		Front	Z	P91907	Endevco	21-Aug-2019
Seat Belt Load Cells		Lap	N/A	R141CA	Measurement Specialties	29-Mar-2019
		Shoulder	N/A	N100E7	Measurement Specialties	19-Nov-2019



**TABLE 3 – Vehicle Instrumentation**

Instrumentation			Axis	Serial Number	Manufacturer	Calibration Date
Crossmember/Rear Seat Accelerometers	Left	Primary	X	P34046	Endevco	26-Nov-2019
			Z	P58548	Endevco	26- Nov-2019
	Right	Redundant	X	P87822	Endevco	18-Jun-2019
		Primary	X	P94524	Endevco	18-Jun-2019
			Z	P57803	Endevco	26-Nov-2019
		Redundant	X	P83356	Endevco	26-Nov-2019
Engine Accelerometers	Top		X	P50393	Endevco	26-Nov-2019
	Bottom		X	P58530	Endevco	26-Nov-2019