

**FINAL REPORT NUMBER: SINCAP-TRC-20-002**

**NEW CAR ASSESSMENT PROGRAM (NCAP)  
MOVING DEFORMABLE BARRIER SIDE IMPACT TEST**

**GENERAL MOTORS LLC  
2020 Cadillac XT6 SUV  
NHTSA NUMBER: M20200109**

**PREPARED BY:  
Transportation Research Center Inc.  
10820 State Route 347  
P. O. Box B-67  
East Liberty, OH 43319**



**Report Date: February 25, 2020**

**FINAL REPORT**

**PREPARED FOR:  
U.S. DEPARTMENT OF TRANSPORTATION  
National Highway Traffic Safety Administration  
Office of Crashworthiness Standards  
Mail Code: NRM-110  
1200 New Jersey Ave, SE, Room W43-410  
Washington, D.C. 20590**

This publication is distributed by the U.S. Department of Transportation, National Highway Traffic Safety Administration, in the interest of information exchange. The opinions, findings, and conclusions expressed in this publication are those of the author(s) and not necessarily those of the Department of Transportation or the National Highway Traffic Safety Administration. The United States Government assumes no liability for its contents or use thereof.

If trade or manufacturers' names or products are mentioned, it is only because they are considered essential to the object of the publication and should not be construed as an endorsement.

Report Prepared By: ILO Project Operations Group

Report Approved By: 

John Shultz

Approval Date: February 25, 2020

FINAL REPORT ACCEPTANCE BY OCWS:

---

Division Chief, New Car Assessment Program  
NHTSA, Office of Crashworthiness Standards

Date: \_\_\_\_\_

---

COTR, New Car Assessment Program  
NHTSA, Office of Crashworthiness Standards

Date: \_\_\_\_\_



## Technical Report Documentation Page

1. Report No. SINCAP-TRC-20-002	2. Government Accession No.	3. Recipient's Catalog No.																																																									
4. Title and Subtitle Final Report of New Car Assessment Program Side Impact MDB Testing of a 2020 Cadillac XT6 SUV, NHTSA No.: M20200109		5. Report Date February 25, 2020																																																									
		6. Performing Organization Code TRC Inc.																																																									
7. Author(s) John Shultz, Project Manager		8. Performing Organization Report Number 191204																																																									
9. Performing Organization Name and Address Transportation Research Center Inc. 10820 State Route 347 East Liberty, OH 43319		10. Work Unit No.																																																									
		11. Contract or Grant No. DTNH22-14-D-00354																																																									
12. Sponsoring Agency Name and Address U.S. Department of Transportation National Highway Traffic Safety Administration Office of Crashworthiness Standards (NRM-110) 1200 New Jersey Ave, SE, Room W43-410 Washington, DC 20590		13. Type of Report and Period Covered Final Test Report December 4, 2019 – February 25, 2020																																																									
		14. Sponsoring Agency Code NRM-110																																																									
15. Supplemental Notes																																																											
16. Abstract <p>This 55 / 28 km/h 90° Moving Deformable Barrier SINCAP Side Impact Test was conducted on the subject 2020 Cadillac XT6 SUV, in accordance with the specifications of the Office of Crashworthiness Standards Test Procedure for the generation of consumer information on vehicle side crash protection. This test was conducted by Transportation Research Center Inc. in East Liberty, Ohio, on December 4, 2019.</p> <p>The impact velocity of the Moving Deformable Barrier (MDB) was 61.87 km/h, and the ambient temperature at the struck (left) side of the target vehicle at the time of impact was 21.5° C. The target vehicle post-test maximum crush was 207 mm at Level 3. The test vehicle's performance was as follows:</p> <table border="1"> <thead> <tr> <th colspan="4">Driver ATD (ES-2re)</th> </tr> <tr> <th>Measurement Description</th><th>Units</th><th>IARV</th><th>Result</th></tr> </thead> <tbody> <tr> <td>Head Injury Criteria (HIC<sub>36</sub>)</td><td>N/A</td><td>1000</td><td>98</td></tr> <tr> <td>Maximum Thoracic Rib Deflection</td><td>mm</td><td>44</td><td>17.1</td></tr> <tr> <td>Total Abdominal Force</td><td>N</td><td>2500</td><td>519.9</td></tr> <tr> <td>Pubic Symphysis Force</td><td>N</td><td>6000</td><td>-1134.4</td></tr> <tr> <td>Lower Spine Acceleration</td><td>G</td><td>82*</td><td>21.3</td></tr> </tbody> </table> <table border="1"> <thead> <tr> <th colspan="4">Passenger ATD (SID-IIs)</th> </tr> <tr> <th>Measurement Description</th><th>Units</th><th>IARV</th><th>Result</th></tr> </thead> <tbody> <tr> <td>Head Injury Criteria (HIC<sub>36</sub>)</td><td>N/A</td><td>1000</td><td>180</td></tr> <tr> <td>Lower Spine Resultant Acceleration</td><td>g's</td><td>82</td><td>41.0</td></tr> <tr> <td>Total Pelvic Force (sum of acetabular and iliac forces)</td><td>N</td><td>5525</td><td>1106.9</td></tr> <tr> <td>Maximum Thoracic Rib Deflection</td><td>mm</td><td>38*</td><td>19.9</td></tr> <tr> <td>Maximum Abdominal Rib Deflection</td><td>mm</td><td>45*</td><td>37.2</td></tr> </tbody> </table> <p>* Proposed IARV</p> <p>The doors on the struck side of the vehicle did not separate from the body at the hinges or latches and the opposite doors did not open during the side impact event.</p>				Driver ATD (ES-2re)				Measurement Description	Units	IARV	Result	Head Injury Criteria (HIC <sub>36</sub> )	N/A	1000	98	Maximum Thoracic Rib Deflection	mm	44	17.1	Total Abdominal Force	N	2500	519.9	Pubic Symphysis Force	N	6000	-1134.4	Lower Spine Acceleration	G	82*	21.3	Passenger ATD (SID-IIs)				Measurement Description	Units	IARV	Result	Head Injury Criteria (HIC <sub>36</sub> )	N/A	1000	180	Lower Spine Resultant Acceleration	g's	82	41.0	Total Pelvic Force (sum of acetabular and iliac forces)	N	5525	1106.9	Maximum Thoracic Rib Deflection	mm	38*	19.9	Maximum Abdominal Rib Deflection	mm	45*	37.2
Driver ATD (ES-2re)																																																											
Measurement Description	Units	IARV	Result																																																								
Head Injury Criteria (HIC <sub>36</sub> )	N/A	1000	98																																																								
Maximum Thoracic Rib Deflection	mm	44	17.1																																																								
Total Abdominal Force	N	2500	519.9																																																								
Pubic Symphysis Force	N	6000	-1134.4																																																								
Lower Spine Acceleration	G	82*	21.3																																																								
Passenger ATD (SID-IIs)																																																											
Measurement Description	Units	IARV	Result																																																								
Head Injury Criteria (HIC <sub>36</sub> )	N/A	1000	180																																																								
Lower Spine Resultant Acceleration	g's	82	41.0																																																								
Total Pelvic Force (sum of acetabular and iliac forces)	N	5525	1106.9																																																								
Maximum Thoracic Rib Deflection	mm	38*	19.9																																																								
Maximum Abdominal Rib Deflection	mm	45*	37.2																																																								
17. Key Words New Car Assessment Program (NCAP) Side Impact MDB ES-2re SID-IIs		18. Distribution Statement Copies of this report are available from: National Highway Traffic Safety Administration Technical Information Services Division, NPO-411 1200 New Jersey Ave, SE Washington, DC 20590																																																									
19. Security Classification (of this report) Unclassified	20. Security Classification (of this page) Unclassified	21. Number of Pages 215	22. Price																																																								

## TABLE OF CONTENTS

<u>Section</u>		<u>Page No.</u>
1	Test Purpose and Procedure	1
2	Summary of Test Results	2
3	Occupant and Vehicle Information	4
<u>Appendix</u>		
A	Photographs	A-1
B	Vehicle and Dummy Response Data Plots	B-1
C	Dummy Performance Calibration Test Data	C-1
D	Test Equipment and Instrumentation Calibration Data	D-1
<u>Data Sheet No.</u>		<u>Page No.</u>
1	General Test and Vehicle Parameter Data	5
2	Seat, Seat Belt, Steering Wheel Adjustment and Fuel Systems Data	8
3	Dummy Longitudinal Clearance Dimensions	11
4	Dummy Lateral Clearance Dimensions	12
5	Camera and Instrumentation Data	13
6	Test Vehicle Accelerometer Locations	14
7	MDB Accelerometer Locations	15
8	Post-Test Observations	16
9	MDB Summary of Results	18
10	Test Vehicle Profile Measurements	19
11	Test Vehicle Exterior Crush Measurements	20
12	MDB Exterior Static Crush Measurements	23
13	Vehicle and MDB Damage Distances	24
14	FMVSS No. 301 Static Rollover Results	25
15	Dummy/Vehicle Temperature and Humidity Stabilization	26

## **SECTION 1**

### **TEST PURPOSE AND PROCEDURE**

#### **TEST PURPOSE AND PROCEDURE**

This moving deformable barrier side impact test was conducted as part of the MY 2020 New Car Assessment Program Side Impact Test Program, sponsored by the National Highway Traffic Safety Administration (NHTSA), under Contract No. DTNH22-14-D-00354. The purpose of this test is to generate comparative side impact performance in a 2020 Cadillac XT6 SUV. The side impact test was conducted in accordance with the Office of Crashworthiness Standard's Laboratory Test Procedure dated October 2015.

## SECTION 2

### SUMMARY OF TEST RESULTS

A 2020 Cadillac XT6 SUV was impacted on the left (driver's) side by a Moving Deformable Barrier (MDB) which was moving forward in a 27° crabbed position to the tow road guidance system at a velocity of 61.87 km/h (38.44 mph). The target vehicle was stationary and was positioned at an angle of 63° to the line of forward motion. The side impact test was conducted by the Transportation Research Center Inc. in East Liberty, Ohio, on December 4, 2019. Pre-test and post-test photographs of the test vehicle and the MDB and the dummies (ES-2-re and SID-IIs) are included in this report.

Dummies were placed in the driver and left rear designated seating positions according to instructions specified in the OCWS Side Impact Laboratory Test Procedure, dated October 2015. The side impact event was documented by 11 cameras. Camera locations are included in this report.

The dummies were instrumented in the following manner:

**DRIVER ATD (ES-2re)**

Primary and redundant head CG tri-axial accelerometers

Chest upper rib, middle rib, and lower rib y-axis displacement potentiometers

Abdomen forward, middle, and rear y-axis load cells

Lower spine (T12) tri-axial accelerometers

Pubic symphysis y-axis load cell

**PASSENGER ATD (SID-IIs)**

Primary and redundant head CG triaxial accelerometers

Chest upper rib, middle rib, and lower rib y-axis displacement potentiometers

Abdomen upper rib and lower rib y-axis displacement potentiometers

Lower spine (T12) tri-axial accelerometers

Acetabulum and iliac wing y-axis load cells

APPENDIX B contains the vehicle and dummy response data. Dummy configuration and performance verification data can be found in APPENDIX C of this report. APPENDIX D of this report contains the test equipment and instrumentation calibration data.

Dummy injury readings were recorded as follows:

Measurement Description	Driver ATD (ES-2-re)		
	Units	Threshold	Result
Head Injury Criteria (HIC <sub>36</sub> )	N/A	1000	98
Maximum Thoracic Rib Deflection	mm	44	17.1
Combined Abdominal Force	N	2500	519.9
Pubic Symphysis Force	N	6000	-1134.4
Lower Spine (T12) Resultant Acceleration	G	82*	21.3

\* Proposed IARV

Measurement Description	Passenger ATD (SID-IIs)		
	Units	Threshold	Result
Head Injury Criteria (HIC <sub>36</sub> )	N/A	1000	180
Lower Spine (T12) Resultant Acceleration	G	82	41.0
Total Pelvic Force (sum of acetabular and iliac forces)	N	5525	1106.9
Maximum Thoracic Rib Deflection	mm	38*	19.9
Maximum Abdominal Rib Deflection	mm	45*	37.2

\* Proposed IARV

Supplemental Restraint Information is given below:

Restraint Type	Left Front (Driver) Occupant Location 1		Left Rear (Passenger) Occupant Location 4	
	Mounted	Deployed	Mounted	Deployed
Frontal Airbag	Yes	No		
Side Curtain Airbag	Yes	Yes	Yes	Yes
Side Torso/Pelvis Airbag	Yes	Yes	No	N/A
Side Pelvis Airbag	No	N/A	No	N/A
Knee Airbag	Yes	No	No	N/A
Seat Belt Pretensioner	Yes	Yes	No	N/A
Seat Belt Load Limiter	Yes	Unknown	No	N/A
Other Safety Restraint	No	N/A	No	N/A

### GENERAL COMMENTS

All doors remained closed throughout the test. No fuel spillage occurred during the impact or the static rollover test which followed. Injury values for both ATDs were within the established performance thresholds.

Left Lower B-Post AY; Questionable data after 14.0 ms

Left Mid B-Post AY; Questionable data from 6-10 ms

Rear Floorpan Above Axle AX; Failed after 24.0 ms

Rear Floorpan Above Axle AY; Failed after 24.0 ms

Rear Floorpan Above Axle AZ; Failed after 24.0 ms

**SECTION 3**  
**OCCUPANT AND VEHICLE INFORMATION**

**DATA SHEET NO. 1  
GENERAL TEST AND VEHICLE PARAMETER DATA**

Test Vehicle: 2020 Cadillac XT6 SUV  
Test Program: SINCAP Side Impact

NHTSA No.: M20200109  
Test Date: 12/4/2019

**TEST VEHICLE INFORMATION AND OPTIONS**

NHTSA No.	M20200109
Model Year	2020
Make	Cadillac
Model	XT6
Body Style	MPV
VIN	1GYKPCRS5LZ121014
Body Color	Manhattan Noir
Odometer Reading (km/mi)	95 mi
Engine Displacement (L)	3.6
Type/No. Cylinders	V/6
Engine Placement	Front Transverse
Transmission Type	Automatic
Transmission Speeds	9
Overdrive	Yes
Final Drive	FWD
Roof Rack	No
Sunroof/T-Top	Yes
Running Boards	No
Tilt Steering Wheel	Yes
Power Seats	Yes
Anti-Lock Brakes (ABS)	Yes

Traction Control System (TCS)	Yes
Auto-Leveling System	No
Automatic Door Locks (ADL)	Yes
Power Window Auto-Reverse	Yes
Other Optional Feature	No
Driver Front Airbag	Yes
Driver Curtain Airbag	Yes
Driver Head/Torso Airbag	No
Driver Torso Airbag	No
Driver Torso/Pelvis Airbag	Yes
Driver Pelvis Airbag	No
Driver Knee Airbag	Yes
Rear Pass. Curtain Airbag	Yes
Rear Pass. Head/Torso Airbag	No
Rear Pass. Torso Airbag	No
Rear Pass. Torso/Pelvis Airbag	No
Rear Passenger Pelvis Airbag	No
Driver Seat Belt Pretensioner	Yes
Rear Pass. Seat Belt Pretensioner	No
Driver Load Limiter	Yes
Rear Passenger Load Limiter	No
Other Safety Restraint	No

Does owner's manual provide instructions to turn off automatic door locks?

No

**DATA FROM CERTIFICATION LABEL**

Manufactured By	GENERAL MOTORS LLC
Date of Manufacture	09/19
Vehicle Type	MPV

GVWR (kg)	2722
GAWR Front (kg)	1350
GAWR Rear (kg)	1545

**VEHICLE SEATING AND CAPACITY WEIGHT INFORMATION**

Measured Parameter	Front	Rear	Third	Total
Designated Seating Capacity DSC)	2	2	2	6
Capacity Weight (VCW) (kg)				698.0
DSC x 68.04 (kg)				408.24
Cargo Weight (RCLW) (kg)				289.76


**VEHICLE SEAT TYPE**

Seating Location	Type of Seat Pan				Type of Seat Back		
	Bucket	Bench	Split Bench	Contoured	Fixed	Adjustable	
						w/ Lever	w/ Knob
Front Seat	Yes	N/A	N/A		N/A	N/A	Yes
Rear or Second Row Seat	Yes	N/A	N/A	Yes	N/A	Yes	N/A
Third Row Seat	N/A	N/A	Yes	Yes	Yes	N/A	N/A

**DATA SHEET NO. 1 (CONTINUED)**  
**GENERAL TEST AND VEHICLE PARAMETER DATA**

Test Vehicle: 2020 Cadillac XT6 SUV  
 Test Program: SINCAP Side Impact

NHTSA No.: M20200109  
 Test Date: 12/4/2019

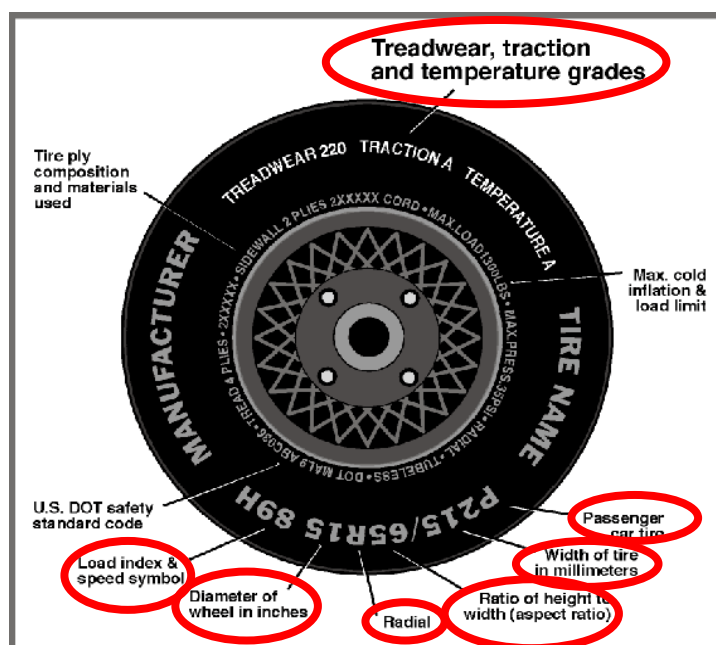

**DATA FROM TIRE PLACARD**

Measured Parameter	Front	Rear
Maximum Tire Pressure (kPa)	300	300
Cold Pressure (kPa)	250	250
Recommended Tire Size	235/55R20 H	235/55R20 H
Tire Size on Vehicle	235/55R20 H	235/55R20 H
Tire Manufacturer	Michelin	Michelin
Tire Model	Premier LTX	Premier LTX
Treadwear	620	620
Traction	A	A
Temperature Grades	A	A
Tire Plies Sidewall	2	2
Tire Plies Body	5	5
Load Index/Speed Symbol	102H	102H
Tire Material	Polyester/Polyamide/Steel	Polyester/Polyamide/Steel
DOT Safety Code Left	B9 AJ 00TX 3319	B9 AJ 00TX 3319
DOT Safety Code Right	B9 AJ 00TX 3319	B9 AJ 00TX 3319



**DATA SHEET NO. 1 (CONTINUED)**  
**GENERAL TEST AND VEHICLE PARAMETER DATA**

Test Vehicle: 2020 Cadillac XT6 SUV  
 Test Program: SINCAP Side Impact

NHTSA No.: M20200109  
 Test Date: 12/4/2019

**TIRE PRESSURES**

	Units	LF	RF	LR	RR
As Delivered	kPa	220	234	220	234
Tire Placard	kPa	250	250	250	250
Owner's Manual	kPa	250	250	250	250
As Tested	kPa	250	250	250	250

**MDB TIRE SPECIFICATIONS**

	Units	Requirement	LF	RF	LR	RR
Tire Size		P205/75R15	P205/75R15	P205/75R15	P205/75R15	P205/75R15
Tire Pressure	kPa	200 ± 21 kPa	207	207	207	207

**TEST VEHICLE AXLE WEIGHTS**

	Units	As Delivered (UVW)			As Tested (ATW)			Fully Loaded		
		Front Axle	Rear Axle	Total	Front Axle	Rear Axle	Total	Front Axle	Rear Axle	Total
Left	kg	565.8	449.2		610.4	560.6		607.4	591.6	
Right	kg	555.2	431.6		549.4	535.8		539.4	524.4	
Ratio	%	56.0	44.0		51.4	48.6		50.7	49.3	
Totals	kg	1121.0	880.8	2001.8	1159.8	1096.4	2256.2	1146.8	1116.0	2262.8

**TARGET TEST WEIGHT CALCULATION**

Measured Parameter	Units	Value	
Total As Delivered Weight (UVW)	kg	2001.8	(A)
Actual Weight of 1 P572V ATD (SID-ILs) Dummy Used	kg	125.0	(B)
Rated Cargo/Luggage Weight (RCLW) <sup>1</sup>	kg	136.0	(C)
Calculated Vehicle Target Weight (TVTW)	kg	2262.8	(A+B+C)

Does the measured As Tested Vehicle Weight lie within the required weight range (i.e.

Calculated Test Vehicle Target Weight – 4.5 kg to 9 kg)? ☒ YES ☐ NO

**TEST VEHICLE ATTITUDES AND CG**

Measurement Description	Units	Fully Loaded	As Tested	Meets Requirement
LF	mm	805	806	Yes
RF	mm	810	808	Yes
RR	mm	815	811	Yes
LR	mm	805	807	Yes
Vehicle CG (Aft of Front Axle)	mm	1413	1392	
Vehicle CG (Left(+)/Right(-) from Longitudinal Centerline)	mm	+50	+32	

\*\*\*The "As Tested" vehicle attitude measurements must be equal to or within ± 10 mm of the "Fully Loaded" vehicle attitude measurements at each wheel well. Indicate "Yes" or "No" for "Meets Requirement".

Test height adjustable suspension setting, if applicable:

N/A

**WEIGHT OF BALLAST AND VEHICLE COMPONENTS REMOVED TO MEET TVTW**

Component Description	Weight (kg)
Ballast: Steel plate & sand bags in cargo area	148.7
Removed: None	0.0

<sup>1</sup> Rated cargo and luggage weight limited to 136.0 kg or 300.0 lbs.

**DATA SHEET NO. 2**  
**SEAT, SEAT BELT, STEERING WHEEL ADJUSTMENT AND FUEL SYSTEM DATA**

Test Vehicle: 2020 Cadillac XT6 SUV  
 Test Program: SINCAP Side Impact

NHTSA No.: M20200109  
 Test Date: 12/4/2019

**SEAT POSITIONING**

The driver seat, front center seat (if applicable), and right front passenger's seat should be set to the mid-track, lowest, mid-angle position. The struck-side rear passenger's seat, rear center seat, and non-struck side rear passenger's seats should be set to the rear-most, lowest, mid-angle position.

**SCRL ANGLE RANGE**

Seat	SCRL(°)		
	Max.	Min.	Mid
Driver Seat	16.2	9.8	13.0
Front Passenger Seat	18.0	10.8	14.4
Front Center Seat*	N/A	N/A	N/A
Struck Side Rear Seat	Fixed	Fixed	Fixed
Non-Struck Side Rear Seat	Fixed	Fixed	Fixed
Rear Center Seat*	N/A	N/A	N/A

\* If applicable.

**SEAT HEIGHT AND ANGLE**

Seat	As Tested SCRL Angle (Mid) (°)	As Tested SCRP Height (mm)	SCRP Height Position	SCRP Height (mm)		
				Rearmost	Mid-Fore/Aft	Forward-Most
Driver Seat	13.0	200	Max	252	256	259
			Mid	228	229	244
			Min	196	200	208
Front Passenger Seat	14.4	202	Max	249	254	259
			Mid	223	228	244
			Min	196	202	208
Front Center Seat*	N/A	N/A	Max	N/A	N/A	N/A
			Mid	N/A	N/A	N/A
			Min	N/A	N/A	N/A
Struck Side Rear Seat	Fixed	N/A	Max	N/A	N/A	N/A
			Mid	N/A	N/A	N/A
			Min	N/A	N/A	N/A
Non-Struck Side Rear Seat	Fixed	N/A	Max	N/A	N/A	N/A
			Mid	N/A	N/A	N/A
			Min	N/A	N/A	N/A
Rear Center Seat*	Fixed	N/A	Max	N/A	N/A	N/A
			Mid	N/A	N/A	N/A
			Min	N/A	N/A	N/A

\* If applicable.

**DATA SHEET NO. 2 (CONTINUED)**  
**SEAT, SEAT BELT, STEERING WHEEL ADJUSTMENT AND FUEL SYSTEM DATA**

Test Vehicle: 2020 Cadillac XT6 SUV  
 Test Program: SINCAP Side Impact

NHTSA No.: M20200109  
 Test Date: 12/4/2019


**SEAT FORE/AFT POSITION**

Seat	Total Fore/Aft Travel		Test Position from Forwardmost Position	
	mm	Detents	mm	Detent
Driver Seat	245	N/A	123	N/A
Front Passenger Seat	245	N/A	123	N/A
Front Center Seat*	N/A	N/A	N/A	N/A
Struck Side Rear Seat	130	15	130	14
Non-Struck Side Rear Seat	130	15	130	14
Rear Center Seat*	N/A	N/A	N/A	N/A

\* If applicable

**SEAT BACK ANGLE ADJUSTMENT**

The driver's seat back is positioned to the manufacturer's designated seat back angle. The front center and front passenger's seat backs are positioned in a similar manner as the driver's seat back. The struck side rear seat back is positioned such that the dummy's head is level. The rear center and non-struck side rear outboard seat backs are positioned in a similar manner as the struck-side rear seat back.



Seat	Total Seat Back Angle Range		Test Position from Most Upright	
	Degrees	Detents	Degrees	Detent
Driver Seat w/ Seated Dummy	65.0	N/A	-16.3	N/A
Front Passenger Seat	65.2	N/A	-16.3	N/A
Front Center Seat*	N/A	N/A	N/A	N/A
Struck Side Rear Seat w/ Seated Dummy	11.9	7	13.9	0
Non-Struck Side Rear Seat	11.9	7	13.7	0
Rear Center Seat*	N/A	N/A	N/A	N/A

\* If applicable

**SEAT BELT ANCHORAGE ADJUSTMENT**

Seat belt anchorages are adjusted in accordance with the information provided by the manufacturer on Form No. 1.

	Total # of Positions	Placed in Position #
Driver Seat	4	1, Uppermost
Rear Seat	Fixed	1

**HEAD RESTRAINT ADJUSTMENT**

The driver's head restraint is adjusted to the highest and most full forward in-use position. The struck-side rear passenger's head restraint is adjusted to the lowest and most full forward in-use position.

	Total # of Positions	Placed in Position #
Driver Seat	9	1, Uppermost
Rear Seat	5	5, Lowermost

**DATA SHEET NO. 2 (CONTINUED)**  
**SEAT, SEAT BELT, STEERING WHEEL ADJUSTMENT AND FUEL SYSTEMS DATA**


Test Vehicle: 2020 Cadillac XT6 SUV  
 Test Program: SINCAP Side Impact

NHTSA No.: M20200109  
 Test Date: 12/4/2019

**STEERING COLUMN ADJUSTMENT**

Steering wheel and column adjustments are made so that the steering wheel hub is at the center of its geometric locus it describes when it moves through its full range of motion.


	Degrees	Fore/Aft Position (mm)
Lowermost, Position No. 1	21.9	0
Geometric Center, Position No. 2	23.6	24
Uppermost, Position No. 3	26.7	48
Telescoping Steering Wheel Travel		48
Test Position	23.6	24



**FUEL PUMP**

Describe the fuel pump type, details about how it operates, and the location of the fuel filler neck.

Pump will run for about 3 seconds when the key is turned on and then will not run unless the engine is cranking or running

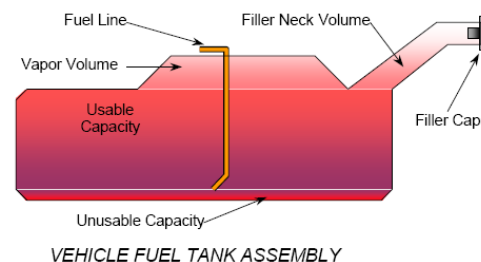

**FUEL TANK CAPACITY**


	Liters
Usable Capacity of "Standard Tank" (see Form No. 1)	73.4
Usable Capacity of "Optional Tank" (see Form No. 1)	N/A
Usable Capacity of Standard Tank (see Owner's Manual)	73.4
Usable Capacity of Optional Tank (see Owner's Manual)	N/A
93% of Usable Capacity	68.3
Actual Amount of Solvent Used in Test	68.3
1/3 of Usable Capacity	24.5

Is the Actual Amount of Solvent Used in the test equal to 93%  $\pm$  1% of the Usable Capacity stated in on Form No. 1?      ☒ YES      ☐ NO

**DATA SHEET NO. 3**  
**DUMMY LONGITUDINAL CLEARANCE DIMENSIONS**

Test Vehicle: 2020 Cadillac XT6 SUV  
 Test Program: SINCAP Side Impact

NHTSA No.: M20200109  
 Test Date: 12/4/2019

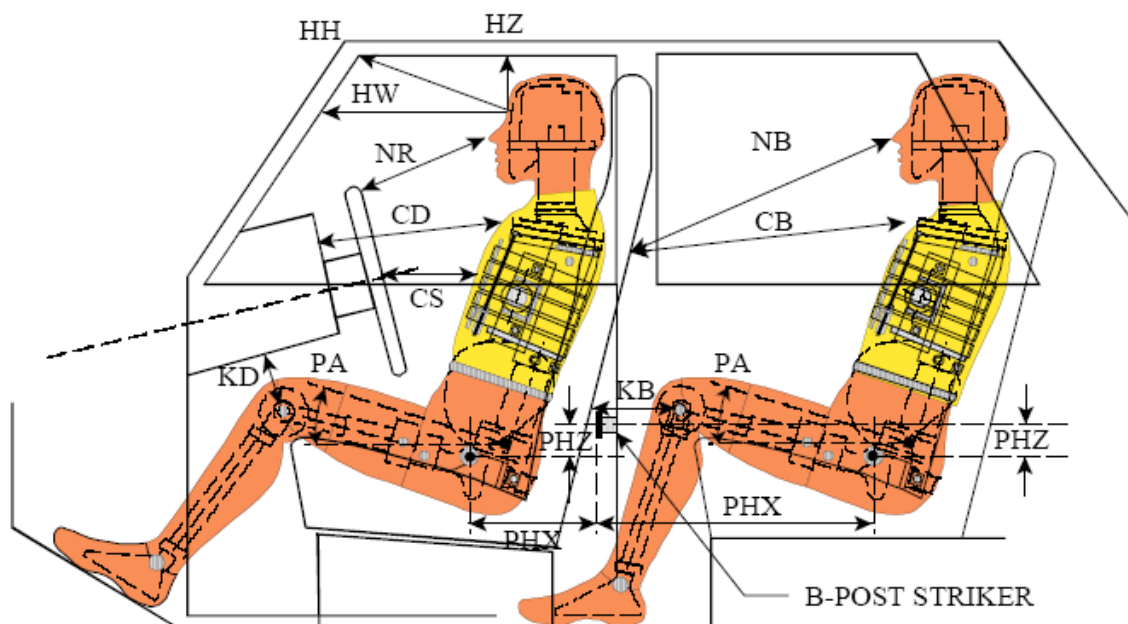

**LEFT SIDE VIEW**

NOTE: 2-DOOR VEHICLE SHOWN.  
 REAR DUMMY PHX & PHZ  
 MEASUREMENTS FOR A 4-DOOR  
 VEHICLE WOULD USE THE C-POST  
 STRIKER AS A REFERENCE POINT


**DUMMY LONGITUDINAL CLEARANCE DIMENSION INFORMATION**

Driver Code	Pass. Code	Measurement Description	Driver		Passenger	
			Length (mm)	Angle	Length (mm)	Angle
HH		Header to Header	496			
HW		Header to Windshield	802			
HZ	HZ	Head to Roof Liner	235		284	
NR	NB	Nose to Rim/Seat Back	507		606	
CD	CB	Chest to Dash/Seat Back	641		558	
CS		Chest to Steering Wheel	448			
KD(L)/KDA(L) <sup>°</sup>	KB(L)/KBA(L) <sup>°</sup>	Left Knee to Dash/Seat Back	245	30.7	261	0
KD(R)/KDA(R) <sup>°</sup>	KB(R)/KBA(R) <sup>°</sup>	Right Knee to Dash/Seat Back	226	34.6	263	0
PAX <sup>°</sup>	PAX <sup>°</sup>	Pelvic Tilt Angle X		0.8		0.6
	PAY <sup>°</sup>	Pelvic Tilt Angle Y				19.2
PHX	PHX	Hip Point to Striker (X-Axis)	156		228	
PHZ	PHZ	Hip Point to Striker (Z-Axis)	122		202	

**DATA SHEET NO. 4**  
**DUMMY LATERAL CLEARANCE DIMENSIONS**

Test Vehicle: 2020 Cadillac XT6 SUV  
 Test Program: SINCAP Side Impact

NHTSA No.: M20200109  
 Test Date: 12/4/2019

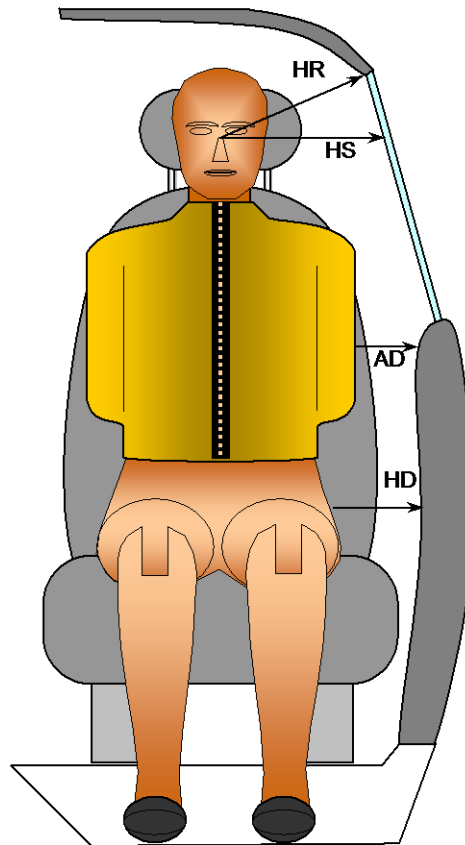


**FRONT VIEW OF DUMMY**

Code	Description	Units	Driver	Passenger
HR	Head to Side Header	mm	273	280
HS	Head to Side Window	mm	378	355
AD	Arm to Door	mm	102	146
HD	H-Point to Door	mm	169	173

## DATA SHEET NO. 5 CAMERA AND INSTRUMENTATION DATA

Test Vehicle: 2020 Cadillac XT6 SUV  
Test Program: SINCAP Side Impact

NHTSA No.: M20200109  
Test Date: 12/4/2019

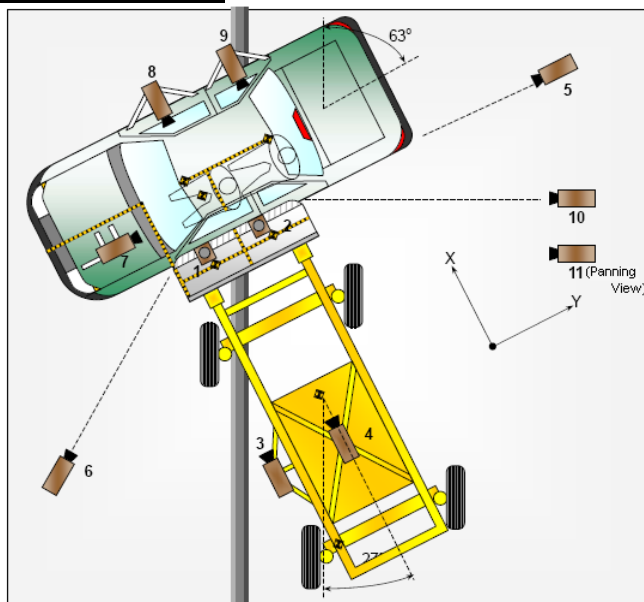

### CAMERA LOCATIONS AND DATA

No.	Camera View	Coordinates (mm)			Lens Length (mm)	Operating Frame Rate (fps)
		X	Y	Z		
1	Overhead Overall	-160	1150	-5692	12.5	1000
2	Overhead Close-up	0	770	-5692	28	1000
3	Left Impact Point (MDB)	-1811	890	-860	25	1000
4	Side Overall (MDB)	-2420	0	-1471	20	1000
5	Rear	0	5698	-1585	20	1000
6	Left Front	-3101	-6374	-1672	20	1000
7	Driver Front (OB)				12.5	1000
8	Driver Side (OB)				12.5	1000
9	Passenger Side (OB)				12.5	1000
10	Real-time Left Rear				Zoom	30
11	Real-time Inrun				Zoom	30

Reference: Impact Point projected to Ground; +X = To Front of MDB +Y = To Right of MDB; +Z = Down

\*All measurements accurate to  $\pm 6$  mm.

If applicable, explain why camera(s) did not operate as intended: N/A


### INSTRUMENTATION

Driver Dummy Channels	16
Passenger Dummy Channels	16
Vehicle Structure Accelerometers	23
MBD Accelerometers	5
TOTAL	60

# **DATA SHEET NO. 6** **TEST VEHICLE ACCELEROMETER LOCATIONS**

Test Vehicle: 2020 Cadillac XT6 SUV  
 Test Program: SINCAP Side Impact

NHTSA No.: M20200109  
 Test Date: 12/4/2019

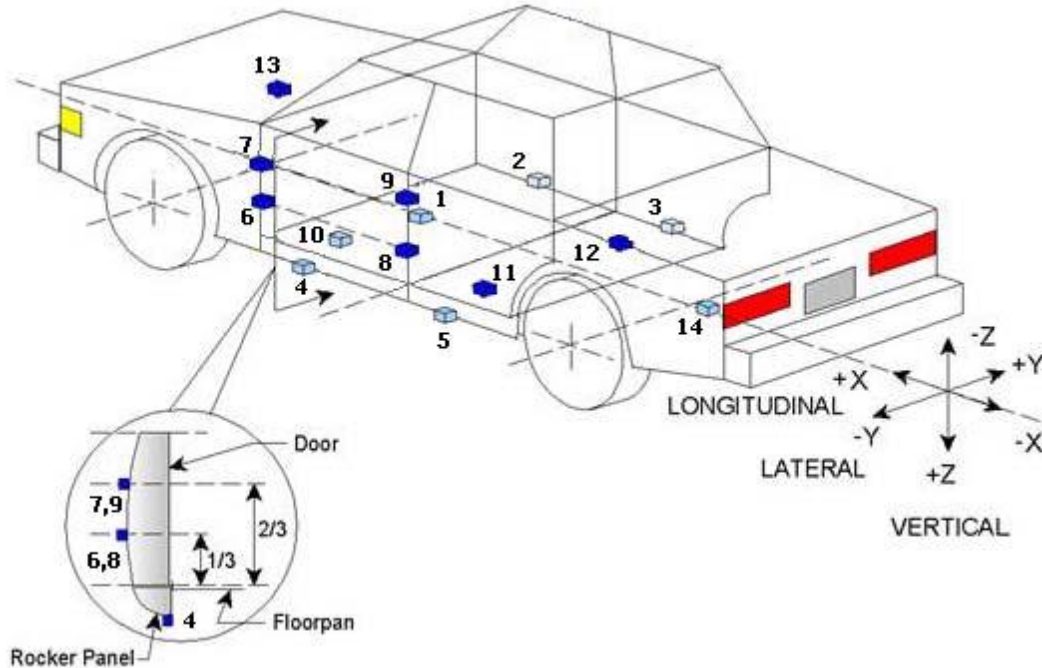

## **TEST VEHICLE ACCELEROMETER LOCATIONS**

Loc. No.	Accelerometer Location	Coordinates (mm)		
		X	Y	Z
1	Vehicle CG	3130	90	-373
2	Right Sill at Front Seat	2970	730	-411
3	Right Sill at Rear Seat	2220	735	-416
4	Left Sill at Front Door	2965	-730	-404
5	Left Sill at Rear Door	2230	-735	-412
6	A-Post Lower	3475	-895	-580
7	A-Post Middle	3505	-856	-967
8	B-Post Lower	2400	-835	-632
9	B-Post Middle	2375	-825	-1055
10	Front Seat Track	2770	-588	-409
11	Rear Seat Structure	1920	-640	-455
12	Right Rear Occ. Compartment	1945	640	-462
13	Engine Block	4420	-70	-783
14	Rear Above Axle	1055	0	-546


Reference: X - Rear surface of vehicle (+ forward)  
 Y - Vehicle Centerline (+ to right)  
 Z - Ground Plane (+ down)



# **DATA SHEET NO. 7** **MDB ACCELEROMETER LOCATIONS**

Test Vehicle: 2020 Cadillac XT6 SUV  
 Test Program: SINCAP Side Impact

NHTSA No.: M20200109  
 Test Date: 12/4/2019

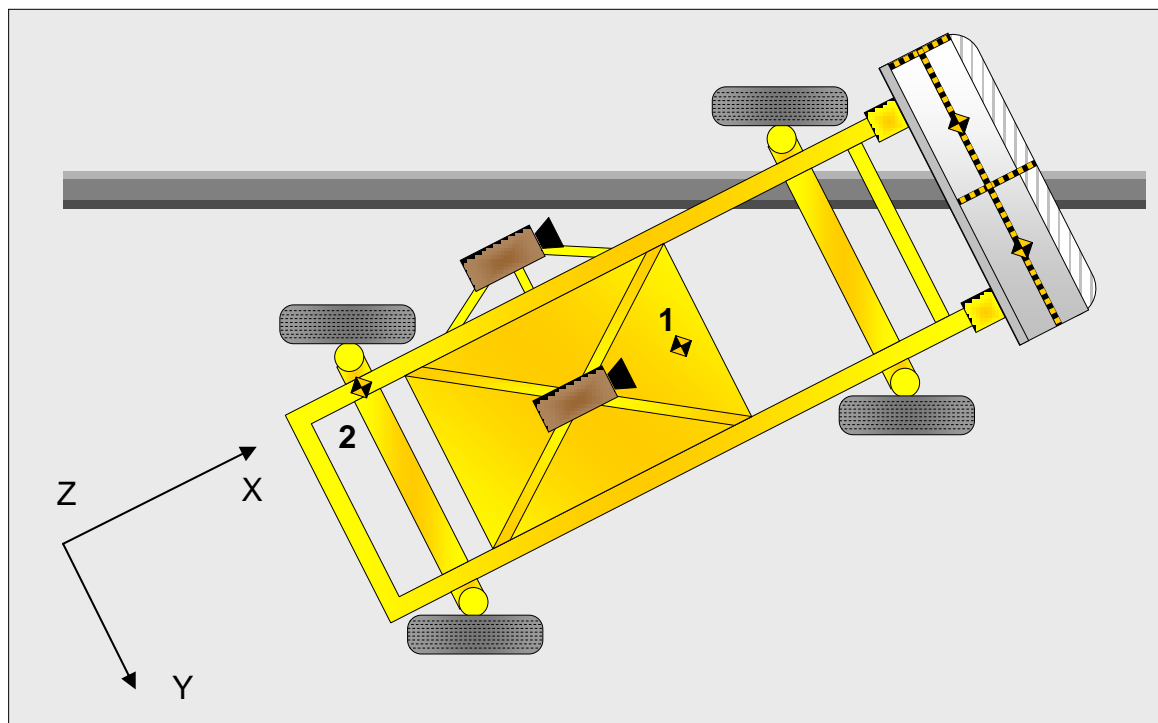

## **MDB ACCELEROMETER LOCATIONS**

Loc. No.	Accelerometer Location	Coordinates (mm)		
		X	Y	Z
1	MDB CG	-2179	0	-505
2	MDB Rear	-3648	-650	-618

Reference : X - Face of MDB (+ forward)  
 Y - MDB Centerline (+ to right)  
 Z - Ground Plane (+ down)

**DATA SHEET NO. 8  
POST-TEST OBSERVATIONS**

Test Vehicle: 2020 Cadillac XT6 SUV  
Test Program: SINCAP Side Impact

NHTSA No.: M20200109  
Test Date: 12/4/2019

**TEST DUMMY INFORMATION AND CONTACT POINTS**

Dummy Body Part	Front Seat Dummy (ES2-re)	Rear Seat Dummy (SID-IIs)
Face	None	SCAB
Top of Head	SCAB	SCAB
Left Side of Head	SCAB	SCAB
Back of Head	None	None
Left Shoulder	SCAB, door panel	Door panel
Upper Torso	Seatback bolster, SAB	Door panel
Lower Torso	Seatback bolster, SAB	Door panel
Left Hip	Door panel	Seat cushion, door panel
Left Knee	Door panel	None

**POST-TEST DOOR PERFORMANCE**

Description	Struck Side		Non-Struck Side		Trunk Lid
	Front	Rear	Front	Rear	
Remained Closed and Operational	No	No	Yes	Yes	Yes
Total Separation from Vehicle at Hinges or Latches	No	No	No	No	No
Latch or Hinge Systems Pulled Out of Their Anchorages	No	No	No	No	No
Disengaged from Latched Position	No	No	No	No	No
Latch Separated from Striker	No	No	No	No	No
Jammed Shut	Yes	Yes	No	No	No
If Door Opened at Striker, Record Width of Opening at Striker (mm)	N/A	N/A	N/A	N/A	N/A

**POST-TEST SEAT PERFORMANCE**

Description	Struck Side		Non-Struck Side	
	Front	Rear	Front	Rear
Seat Movement Along Seat Track	No	No	No	No
Seat Disengagement from Floor pan	No	No	No	No
Seat Back Movement from Initial Position	No	No	No	No
Seat Back Collapse	No	No	No	No

**POST-TEST STRUCTURAL OBSERVATIONS**

Critical Areas of Performance	Observations and Conclusions
Pillar Performance	Good
Sill Separation	None
Windshield Damage	None
Side Window Damage	Driver window cracked but intact
Other Notable Effects	None

**DATA SHEET NO. 8 (CONTINUED)**  
**POST TEST OBSERVATIONS**

Test Vehicle: 2020 Cadillac XT6 SUV  
Test Program: SINCAP Side Impact

NHTSA No.: M20200109  
Test Date: 12/4/2019

**SUPPLEMENTAL RESTRAINT SYSTEM INFORMATION**

Restraint Type	Struck Side Driver		Struck Side Rear Passenger	
	Mounted	Deployed	Mounted	Deployed
Frontal Airbag	Yes	No		
Knee Airbag	Yes	No		
Side Curtain Airbag	Yes	Yes	Yes	Yes
Side Torso/Pelvis Airbag	Yes	Yes	No	N/A
Side Pelvis Airbag	No	N/A	No	N/A
Seat Belt Pretensioner	Yes	Yes	No	N/A
Seat Belt Load Limiter	Yes	Unknown	No	N/A
Other	No	N/A	No	N/A

**IMPACT POINT LOCATION DATA**

Measured Parameter	Units	Tolerance	Value
Vehicle Wheel Base	mm		2865
Vertical Impact Reference Line (Aft of Front Axle) (Intended Impact Point)	mm		493
Actual Impact Point (Aft of Front Axle)	mm		484
Horizontal Offset ( + forward / - rearward)	mm	+/- 50 of Intended Impact point	+9
Vertical Offset (+ down / - up)	mm	+/- 20 of Intended Impact point	-5

**DATA SHEET NO. 9**  
**MDB SUMMARY OF RESULTS**

Test Vehicle: 2020 Cadillac XT6 SUV  
Test Program: SINCAP Side Impact

NHTSA No.: M20200109  
Test Date: 12/4/2019

**MDB SPECIFICATIONS**

Measurement Description	Length (mm)
Overall Width of Framework Carriage	1252
Overall Length Including Honeycomb Face	4115
Wheel Base of Framework Carriage	2591
C.G. Location aft of Front Axle	1103

**MDB WEIGHTS**

	Units	Front Axle	Rear Axle	Total
Left	kg	393.4	287.2	680.6
Right	kg	389.0	293.0	682.0
Ratio	%	57.4	42.6	100.0
Totals	kg	782.4	580.2	1362.6


**SPEED AND IMPACT ANGLE DATA**

Measured Parameter	Units	Requirement	Value
Trap No. 1 Velocity (Primary)	km/h	61.1 to 62.7	61.87
Trap No. 2 Velocity (Redundant)	km/h	61.1 to 62.7	61.87
MDB CL to Target Vehicle CL	degrees	88.5 to 91.5	90
MDB Forward Line of Motion to Target Vehicle CL	degrees	62.5 to 63.5	63
MDB Crabbed Angle to MDB Forward Line of Motion	degrees	26 to 28	27

**DATA SHEET NO. 10**  
**TEST VEHICLE PROFILE MEASUREMENTS**

Test Vehicle: 2020 Cadillac XT6 SUV  
 Test Program: SINCAP Side Impact

NHTSA No.: M20200109  
 Test Date: 12/4/2019

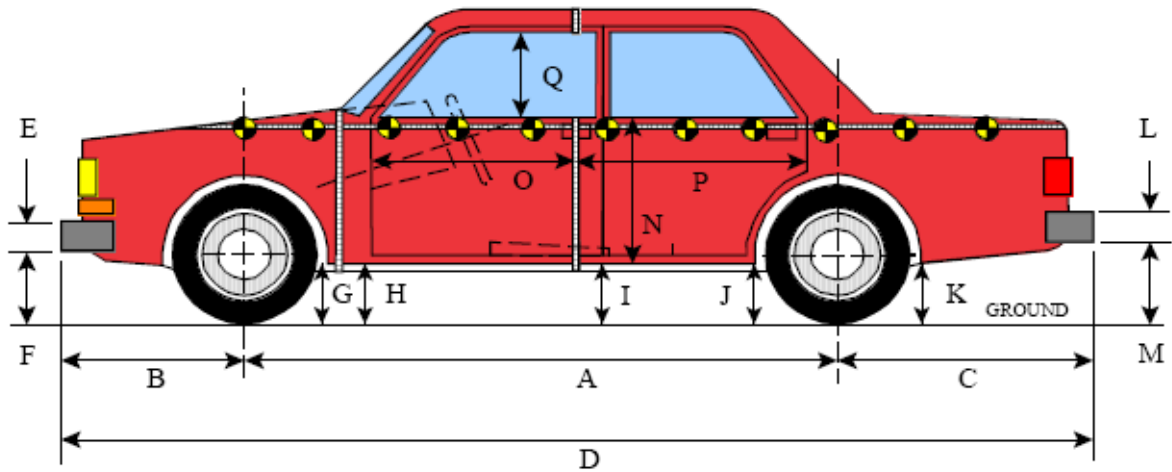

**LEFT SIDE VIEW**

All MEASUREMENTS IN (mm) WITH TOLERANCE OF  $\pm 3\text{mm}$


**VEHICLE PRE- AND POST-TEST MEASUREMENT INFORMATION**

Code	Measurement Description	Pre-Test	Post-Test	Difference
A	Wheelbase	2865	2860	5
B	Front Axle to Front Surface of Vehicle	1035	1035	0
C	Rear Axle to Rear Surface of Vehicle	1150	1150	0
D	Total Length at Centerline	5050	5050	0
E	Front Bumper Thickness	105	105	0
F	Front Bumper Bottom to Ground	500	490	10
G	Sill Height at Front Wheel Well	365	380	-15
H	Sill Height at Front Door Leading Edge	365	415	-50
I	Sill Height at B-Pillar	420	480	-60
J1	Sill Height at Rear Wheel Well	422	525	-103
J2	Pinch Weld Height at Rear Wheel Well	264	305	-41
K	Sill Height Aft of Rear Wheel Well	498	550	-52
L	Rear Bumper Thickness	118	118	0
M	Rear Bumper Bottom to Ground	538	590	-52
N	Sill Height to Window Bottom Sill	920	850	70
O	Front Door Leading Edge to Impact CL	827	780	47
P	Rear Door Trailing Edge to Impact CL	1343	1285	58
Q	Front Window Opening	450	440	10
R	Right Side Length	4650	4650	0
S	Left Side Length	4650	4650	0
T	Vehicle Width	1955	1955	0

**DATA SHEET NO. 11**  
**TEST VEHICLE EXTERIOR CRUSH MEASUREMENTS**

Test Vehicle: 2020 Cadillac XT6 SUV  
 Test Program: SINCAP Side Impact

NHTSA No.: M20200109  
 Test Date: 12/4/2019

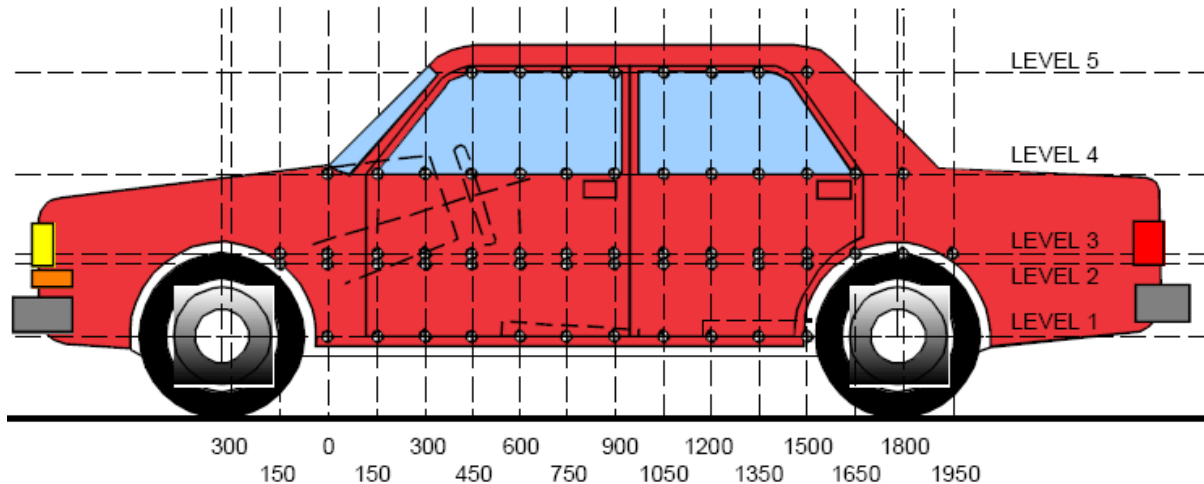

**LEFT SIDE VIEW**

**MAXIMUM EXTERIOR CRUSH MEASUREMENTS**

Level	Measurement Description	Height Above Ground	Maximum Exterior Static Crush	Distance From Impact
1	Sill Top	431	121	450
2	Driver Hip Point	667	201	1650
3	Mid-Door	736	207	1650
4	Window Sill	1094	57	1950
5	Window Top	1652	2	1350
				1500
				1650

**NOTE:** The above measurements were taken along the vertical impact reference line.  
 Vehicle measurements forward of the vertical impact reference line are negative.

**DATA SHEET NO. 11 (CONTINUED)**  
**TEST VEHICLE EXTERIOR CRUSH MEASUREMENTS**

Test Vehicle: 2020 Cadillac XT6 SUV  
 Test Program: SINCAP Side Impact

NHTSA No.: M20200109  
 Test Date: 12/4/2019

**EXTERIOR CRUSH MEASUREMENTS AT EACH LEVEL**


	Pre-Test					Post-Test					Difference				
	1	2	3	4	5	1	2	3	4	5	1	2	3	4	5
<b>-450</b>	0	0	0	807	0	0	0	0	816	0	0	0	0	-9	0
<b>-300</b>	0	0	0	820	0	0	0	0	828	0	0	0	0	-8	0
<b>-150</b>	0	981	980	829	0	0	986	985	833	0	0	-5	-5	-4	0
<b>0</b>	955	970	968	841	0	958	972	970	846	0	-3	-2	-2	-5	0
<b>150</b>	938	954	954	852	0	861	848	863	859	0	77	106	91	-7	0
<b>300</b>	927	942	944	861	0	808	807	814	862	0	119	135	130	-1	0
<b>450</b>	924	935	937	871	0	803	773	772	870	0	121	162	165	1	0
<b>600</b>	918	931	934	879	0	807	767	762	874	0	111	164	172	5	0
<b>750</b>	914	930	932	887	0	808	774	768	873	0	106	156	164	14	0
<b>900</b>	910	928	931	891	630	815	786	783	865	632	95	142	148	26	-2
<b>1050</b>	913	927	930	922	635	807	814	824	900	636	106	113	106	22	-1
<b>1200</b>	910	925	928	901	638	798	811	795	874	637	112	114	133	27	1
<b>1350</b>	910	923	926	905	638	798	781	757	850	636	112	142	169	55	2
<b>1500</b>	910	923	926	906	639	806	753	732	857	637	104	170	194	49	2
<b>1650</b>	909	927	929	904	638	813	726	722	855	636	96	201	207	49	2
<b>1800</b>	922	940	942	902	638	824	754	749	846	637	98	186	193	56	1
<b>1950</b>	936	956	959	890	636	943	878	870	833	635	-7	78	89	57	1
<b>2100</b>	0	0	0	900	633	0	0	0	884	633	0	0	0	16	0
<b>2250</b>	0	0	0	895	629	0	0	0	877	630	0	0	0	18	-1
<b>2400</b>	0	0	0	892	624	0	0	0	879	623	0	0	0	13	1

**NOTE:** Pre-test measurements are taken when the vehicle is in the "As Tested" weight condition. Vehicle measurements forward of the vertical impact reference line are negative. The crush profile grid is established prior to the test based on an estimated impact point.

**DATA SHEET NO. 11 (CONTINUED)**  
**TEST VEHICLE EXTERIOR CRUSH MEASUREMENTS**

Test Vehicle: 2020 Cadillac XT6 SUV  
Test Program: SINCAP Side Impact

NHTSA No.: M20200109  
Test Date: 12/4/2019

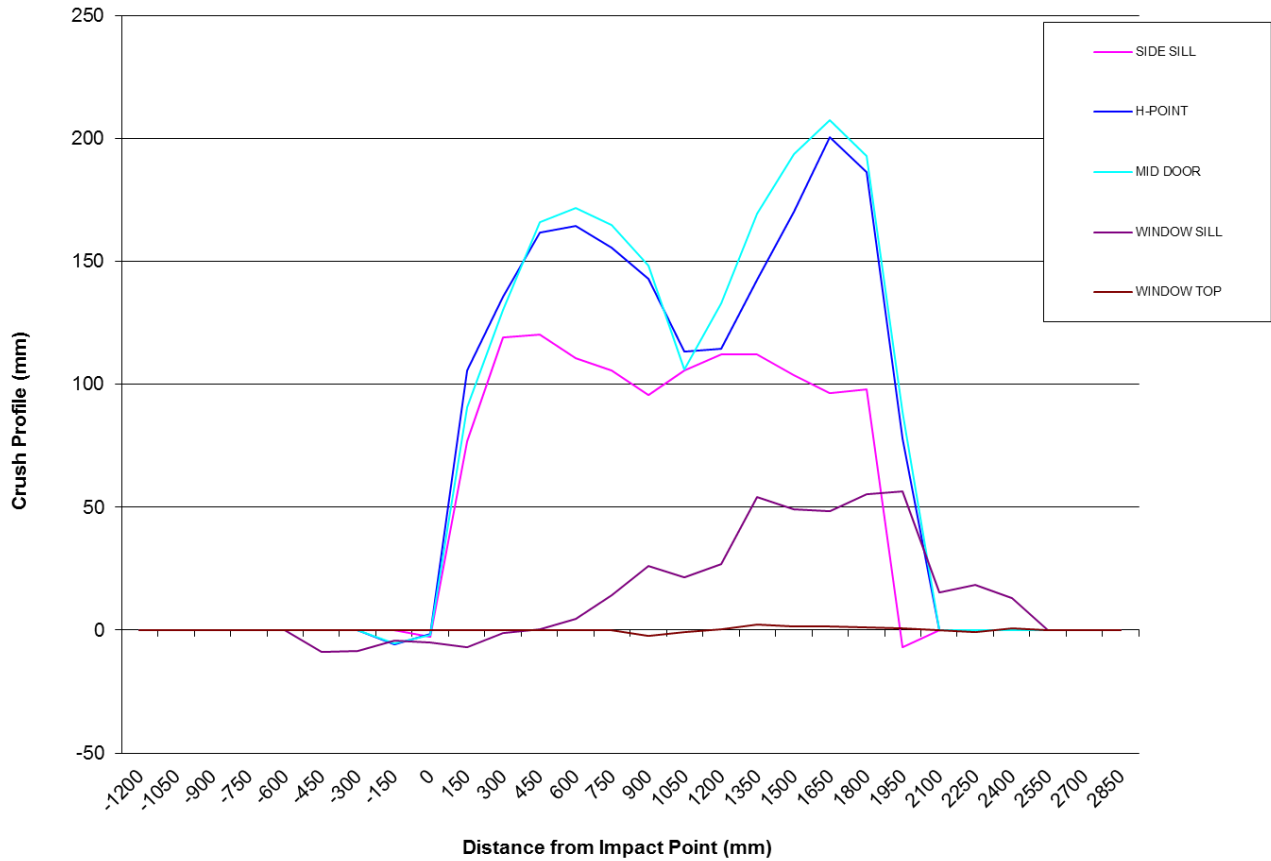




**DATA SHEET NO. 12**  
**MDB EXTERIOR STATIC CRUSH MEASUREMENTS**

Test Vehicle: 2020 Cadillac XT6 SUV  
 Test Program: SINCAP Side Impact

NHTSA No.: M20200109  
 Test Date: 12/4/2019

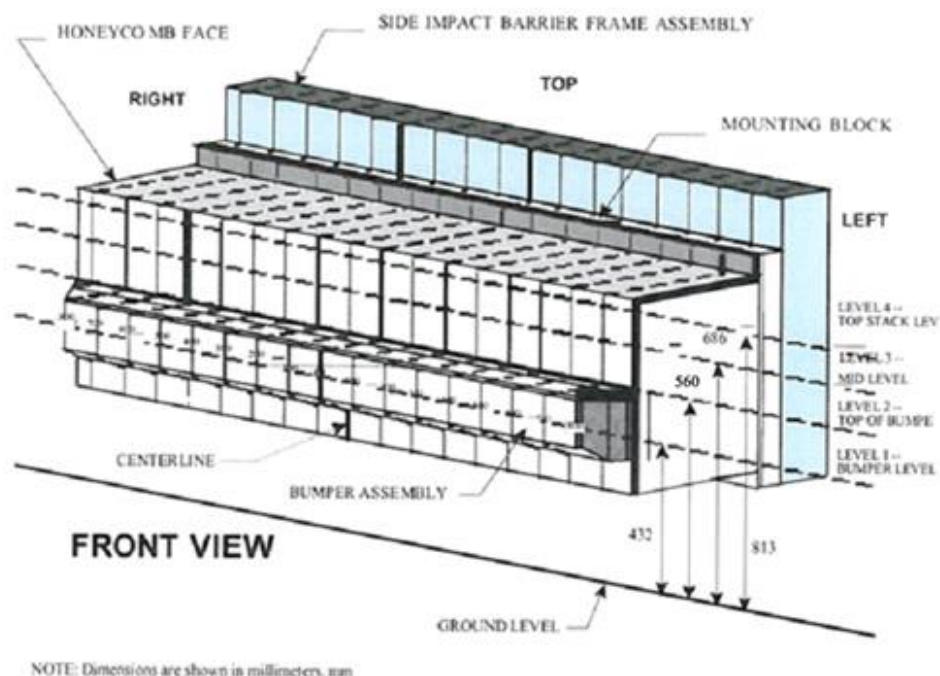

**MAXIMUM STATIC CRUSH OF HONEYCOMB IMPACT FACE**

Vertical Location			From Centerline		Maximum Crush
Row	Description	Height	Distance	Direction	
A	Center of Bumper	432	800	Right	262
B	Top of Bumper	560	800	Right	154
C	Mid-Level	686	800	Left	144
D	Top of Stack	813	800	Left	152

**DEFORMABLE BARRIER STATIC CRUSH**


Stack Level	Distance Right of Center								C/L	Distance Left of Center							
	800	700	600	500	400	300	200	100		100	200	300	400	500	600	700	800
1	262	256	251	248	245	242	240	237	235	231	227	224	221	218	216	221	219
2	154	151	151	146	147	---	---	149	137	131	126	122	119	118	116	121	137
3	89	75	74	84	94	107	122	122	107	83	72	64	61	64	78	110	144
4	77	75	73	78	89	106	130	129	108	90	75	83	92	96	96	116	152

<sup>1</sup> Missing barrier points post test.

# **DATA SHEET NO. 13** **VEHICLE AND MDB DAMAGE PROFILE DISTANCES**

Test Vehicle: 2020 Cadillac XT6 SUV  
 Test Program: SINCAP Side Impact

NHTSA No.: M20200109  
 Test Date: 12/4/2019

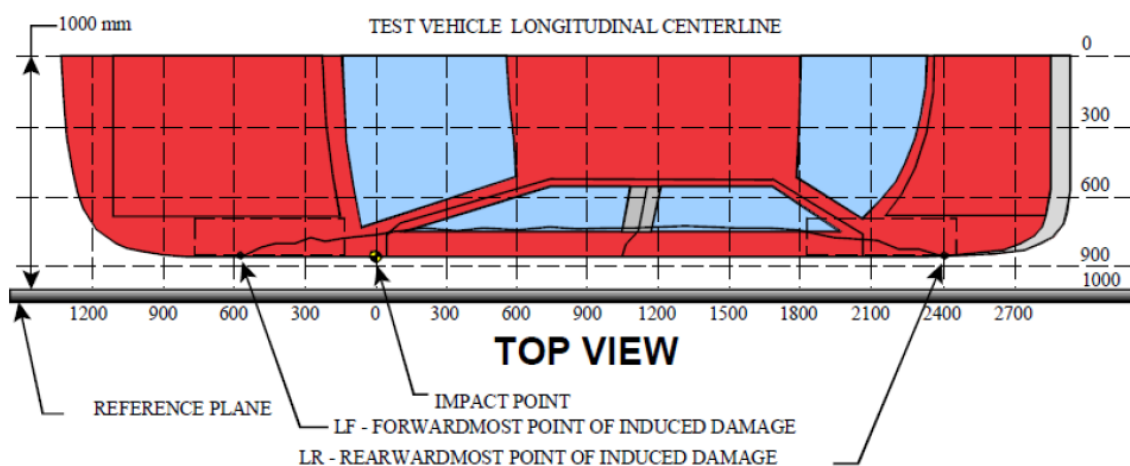

## **VEHICLE DAMAGE PROFILE DISTANCES**

DPD	Distance From Impact Point (mm)	Level	Post-Test (mm)	Pre-Test (mm)	Crush (mm)
1	2400	4	879	892	13
2	1950	3	870	959	89
3	1500	3	732	926	194
4	1050	2	814	927	113
5	600	3	762	934	172
6 <sup>1</sup>	150	2	848	954	0

## **MDB DAMAGE PROFILE DISTANCES**

DPD	Distance From Center of MDB	Level	Post-Test (mm)	Pre-Test (mm)	Crush (mm)
1	800 mm Left of Center	1	252	471	219
2	500 mm Left of Center	1	268	486	218
3	200 mm Left of Center	1	260	487	227
4	200 mm Right of Center	1	247	487	240
5	500 mm Right of Center	1	239	487	248
6	800 mm Right of Center	1	216	478	262

<sup>1</sup> DPD 6 is defined as zero crush since the crush does not extend to the end of the vehicle.

**DATA SHEET NO. 14**  
**FMVSS NO. 301 STATIC ROLLOVER RESULTS**


Test Vehicle: 2020 Cadillac XT6 SUV  
 Test Program: SINCAP Side Impact

NHTSA No.: M20200109  
 Test Date: 12/4/2019

**Test Time:** 17:54    **Temperature:** 21.4°C

- A. From impact until vehicle motion ceases: 0 oz.  
 (Maximum allowable is 1 ounce)
- B. For the 5 minute period after motion ceases: 0 oz.  
 (Maximum allowable is 5 ounces)
- C. For the following 25 minutes: 0 oz.  
 (Maximum allowable is 1 ounce/minute)
- D. Spillage Details: None

**FMVSS 301 STATIC ROLLOVER DATA**

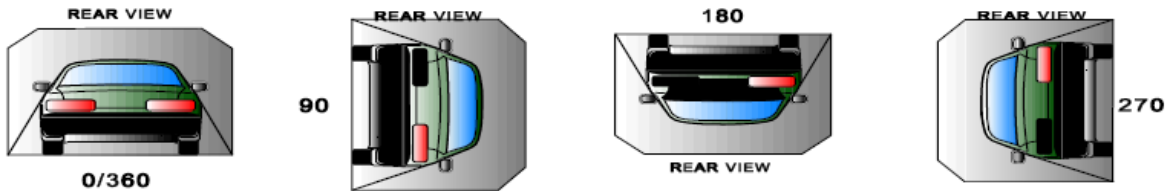

**ROLLOVER SOLVENT COLLECTION TIME TABLE IN SECONDS**

Test Phase	Rotation Time	Hold Time	Total Time
0 to 90	90	330	420
90 to 180	90	330	840
180 to 270	90	330	1260
270 to 360	90	330	1680

**FMVSS NO. 301 ROLLOVER SPILLAGE TABLE**

Test Phase	First 5 Minutes	Sixth Minute	Seventh Minute	Eighth Minute
0 to 90	0	0	0	N/A
90 to 180	0	0	0	N/A
180 to 270	0	0	0	N/A
270 to 360	0	0	0	N/A

**ROLLOVER SOLVENT SPILLAGE LOCATION TABLE**


Test Phase	Spillage Location
0 to 90	None
90 to 180	None
180 to 270	None
270 to 360	None

**DATA SHEET NO. 15**  
**DUMMY/VEHICLE TEMPERATURE AND HUMIDITY STABILIZATION DATA**

Test Vehicle: 2020 Cadillac XT6 SUV  
Test Program: SINCAP Side Impact

NHTSA No.: M20200109  
Test Date: 12/4/2019

M20200109 Cadillac XT6 SUV Left MDB Impact 191204: Test Time 15:26

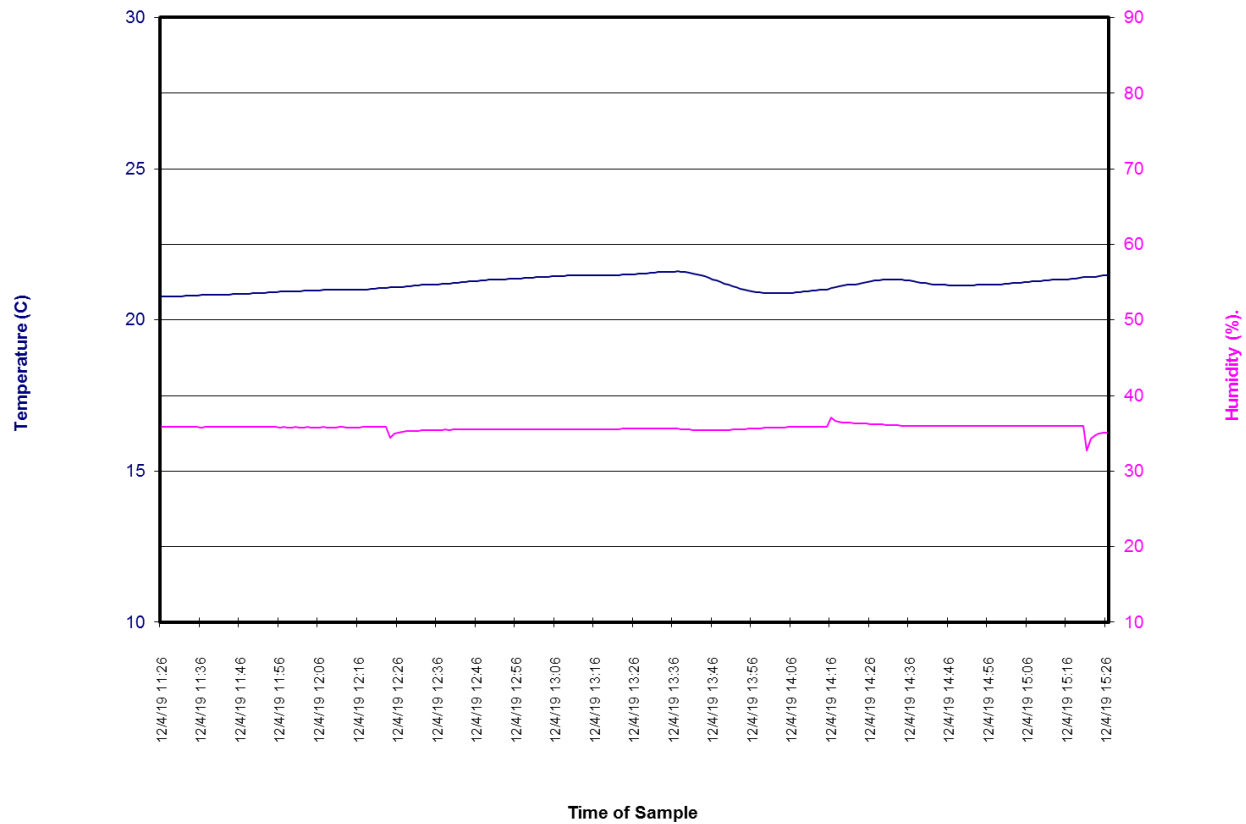

**APPENDIX A**  
**PHOTOGRAPHS**

## TABLE OF PHOTOGRAPHS

<b>No.</b>	<b>Description</b>	<b>Page</b>
<b>001</b>	As-Delivered Right Front $\frac{3}{4}$ View of Test Vehicle	<b>A-6</b>
<b>002</b>	As-Delivered Left Rear $\frac{3}{4}$ View of Test Vehicle	<b>A-6</b>
<b>003</b>	Pre-Test Frontal View of Test Vehicle	<b>A-7</b>
<b>004</b>	Post-Test Frontal View of Test Vehicle	<b>A-7</b>
<b>005</b>	Pre-Test Left Front $\frac{3}{4}$ View of Test Vehicle	<b>A-8</b>
<b>006</b>	Post-Test Left Front $\frac{3}{4}$ View of Test Vehicle	<b>A-8</b>
<b>007</b>	Pre-Test Left Side View of Test Vehicle	<b>A-9</b>
<b>008</b>	Post-Test Left Side View of Test Vehicle	<b>A-9</b>
<b>009</b>	Pre-Test Left Rear $\frac{3}{4}$ View of Test Vehicle	<b>A-10</b>
<b>010</b>	Post-Test Left Rear $\frac{3}{4}$ View of Test Vehicle	<b>A-10</b>
<b>011</b>	Pre-Test Rear View of Test Vehicle	<b>A-11</b>
<b>012</b>	Post-Test Rear View of Test Vehicle	<b>A-11</b>
<b>013</b>	Pre-Test Right Side View of Test Vehicle	<b>A-12</b>
<b>014</b>	Post-Test Right Side View of Test Vehicle	<b>A-12</b>
<b>015</b>	Pre-Test Overhead View of Test Area	<b>A-13</b>
<b>016</b>	Post-Test Overhead View of Test Area	<b>A-13</b>
<b>017</b>	Pre-Test Left Side View of MDB Positioned Against Side of Test Vehicle	<b>A-14</b>
<b>018</b>	Pre-Test Right Side View of MDB Positioned Against Side of Test Vehicle	<b>A-14</b>
<b>019</b>	Pre-Test Close-Up View of Impact Point Target	<b>A-15</b>
<b>020</b>	Post-Test Close-Up View of Impact Point Target	<b>A-15</b>
<b>021</b>	Pre-Test Left Front Door Latch Close-Up	<b>A-16</b>
<b>022</b>	Post-Test Left Front Door Latch Close-Up	<b>A-16</b>
<b>023</b>	Pre-Test Left Rear Door Latch Close-Up	<b>A-17</b>
<b>024</b>	Post-Test Left Rear Door Latch Close-Up	<b>A-17</b>
<b>025</b>	Pre-Test Front Close-Up View of Driver Dummy	<b>A-18</b>
<b>026</b>	Post-Test Front Close-Up View of Driver Dummy	<b>A-18</b>
<b>027</b>	Pre-Test Left Side View of Driver Dummy Showing Belt and Chalking	<b>A-19</b>
<b>028</b>	Pre-Test Left Side View of Driver Dummy Shoulder and Door Top	<b>A-20</b>
<b>029</b>	Post-Test Left Side View of Driver Dummy Shoulder and Door Top	<b>A-20</b>
<b>030</b>	Pre-Test Frontal View of Driver Seat Back Prior to Dummy Positioning	<b>A-21</b>
<b>031</b>	Pre-Test Frontal View of Driver Dummy Head and Shoulders in Relation to Head Restraint	<b>A-21</b>
<b>032</b>	Pre-Test Frontal View of Driver Seat Pan Prior to Dummy Positioning	<b>A-22</b>
<b>033</b>	Pre-Test Overhead View of Driver Dummy Thighs on Seat Pan	<b>A-22</b>
<b>034</b>	Pre-Test Placement of Driver Dummy's Feet	<b>A-23</b>
<b>035</b>	Pre-Test View of Belt Anchorage for Driver Dummy	<b>A-23</b>
<b>036</b>	Pre-Test Left Side View of Steering Wheel	<b>A-24</b>

## TABLE OF PHOTOGRAPHS (CONTINUED)

<b>No.</b>	<b>Description</b>	<b>Page</b>
<b>037</b>	View of Disengaged Parking Brake	<b>A-24</b>
<b>038</b>	Pre-Test View of Parking Brake	<b>A-25</b>
<b>039</b>	Pre-Test Close-Up Left Side View of Driver Seat Track	<b>A-25</b>
<b>040</b>	Pre-Test Close-Up Left Side View of Driver Seat Back	<b>A-26</b>
<b>041</b>	Pre-Test Close-Up View of Driver Seat Back or Head Restraint	<b>A-26</b>
<b>042</b>	Pre-Test Driver Dummy and Door Clearance View	<b>A-27</b>
<b>043</b>	Post-Test Driver Dummy and Door Clearance View	<b>A-27</b>
<b>044</b>	Pre-Test Right Side View of Driver Dummy and Front Seat of Occupant Compartment	<b>A-28</b>
<b>045</b>	Post-Test Right Side View of Driver Dummy and Front Seat of Occupant Compartment	<b>A-28</b>
<b>046</b>	Pre-Test Driver Inner Door Panel View	<b>A-29</b>
<b>047</b>	Post-Test Driver Inner Door Panel View Showing Driver Dummy Contact Locations	<b>A-29</b>
<b>048</b>	Post-Test Driver Dummy Close-Up Head Contact with Vehicle View	<b>A-30</b>
<b>049</b>	Post-Test Driver Dummy Close-Up Head Contact with Side Airbag View	<b>A-30</b>
<b>050</b>	Post-Test Driver Dummy Close-Up Torso Contact with Vehicle Interior View	<b>A-31</b>
<b>051</b>	Post-Test Driver Dummy Close-Up Torso Contact with Side Airbag View	<b>A-31</b>
<b>052</b>	Post-Test Driver Dummy Close-Up Pelvis Contact View	<b>A-32</b>
<b>053</b>	Post-Test Driver Dummy Close-Up Pelvis Contact with Side Airbag View	<b>A-32</b>
<b>054</b>	Post-Test Driver Dummy Close-Up Knee Contact View	<b>A-33</b>
<b>055</b>	Pre-Test Left Side View of Rear Passenger Dummy Showing Belt and Chalking	<b>A-33</b>
<b>056</b>	Pre-Test Left Side View of Rear Passenger Dummy Shoulder and Door Top View	<b>A-34</b>
<b>057</b>	Post-Test Left Side View of Rear Passenger Dummy Shoulder and Door Top View	<b>A-34</b>
<b>058</b>	Pre-Test Frontal View of Rear Passenger Seat Back Prior to Dummy Positioning	<b>A-35</b>
<b>059</b>	Pre-Test Frontal View of Rear Passenger Dummy Head and Shoulders in Relation to Head Restraint	<b>A-35</b>
<b>060</b>	Pre-Test Overhead View of Rear Passenger Seat Pan Prior to Dummy Positioning	<b>A-36</b>
<b>061</b>	Pre-Test Overhead View of Rear Passenger Dummy Thighs on Seat Pan	<b>A-36</b>
<b>062</b>	Pre-Test View of Rear Passenger Dummy's Neck Showing Position of Adjustable Neck Bracket	<b>A-37</b>
<b>063</b>	Pre-Test View of Rear Passenger Dummy's Head Showing Dummy's Head is Level	<b>A-37</b>


## TABLE OF PHOTOGRAPHS (CONTINUED)

No.	Description	Page
<b>064</b>	Pre-Test Placement of Rear Passenger Dummy's Feet	<b>A-38</b>
<b>065</b>	Pre-Test View of Belt Anchorage for Rear Passenger Dummy	<b>A-38</b>
<b>066</b>	Pre-Test Close-Up Left Side View of Rear Passenger Seat Track	<b>A-39</b>
<b>067</b>	Pre-Test Close-Up Left Side View of Rear Passenger Seat Back	<b>A-39</b>
<b>068</b>	Pre-Test Close-Up View of Rear Passenger Seat Back or Head Restraint	<b>A-40</b>
<b>069</b>	Pre-Test Rear Passenger Dummy and Door Clearance View	<b>A-41</b>
<b>070</b>	Post-Test Rear Passenger Dummy and Door Clearance View	<b>A-41</b>
<b>071</b>	Pre-Test Right Side View of Rear Passenger Dummy and Rear Seat Occupant Compartment	<b>A-42</b>
<b>072</b>	Post-Test Right Side View of Rear Passenger Dummy and Rear Seat Occupant Compartment	<b>A-42</b>
<b>073</b>	Pre-Test Rear Passenger Inner Door Panel View	<b>A-43</b>
<b>074</b>	Post-Test Rear Passenger Inner Door Panel View	<b>A-43</b>
<b>075</b>	Post-Test Rear Passenger Dummy Close-Up Head Contact with Vehicle View	<b>A-44</b>
<b>076</b>	Post-Test Rear Passenger Dummy Close-Up Head Contact with Side Airbag View	<b>A-44</b>
<b>077</b>	Post-Test Rear Passenger Dummy Close-Up Torso Contact with Vehicle Interior View	<b>A-45</b>
<b>078</b>	Post-Test Rear Passenger Dummy Close-Up Torso Contact with Side Airbag View	<b>A-45</b>
<b>079</b>	Post-Test Rear Passenger Dummy Close-Up Pelvis Contact View	<b>A-46</b>
<b>080</b>	Post-Test Rear Passenger Dummy Close-Up Pelvis Contact with Side Airbag View	<b>A-46</b>
<b>081</b>	Post-Test Rear Passenger Dummy Close-Up Knee Contact View	<b>A-47</b>
<b>082</b>	Pre-Test View of Fuel Filler Cap or Fuel Filler Neck	<b>A-48</b>
<b>083</b>	Post-Test View of Fuel Filler Cap or Fuel Filler Neck	<b>A-48</b>
<b>084</b>	Pre-Test Front View of MDB Impactor Face	<b>A-49</b>
<b>085</b>	Post-Test Front View of MDB Impactor Face	<b>A-49</b>
<b>086</b>	Pre-Test Top View of MDB Impactor Face	<b>A-50</b>
<b>087</b>	Post-Test Top View of MDB Impactor Face	<b>A-50</b>
<b>088</b>	Pre-Test Left Side View of MDB Impactor Face	<b>A-51</b>
<b>089</b>	Post-Test Left Side View of MDB Impactor Face	<b>A-51</b>
<b>090</b>	Pre-Test Right Side View of MDB Impactor Face	<b>A-52</b>
<b>091</b>	Post-Test Right Side View of MDB Impactor Face	<b>A-52</b>



## TABLE OF PHOTOGRAPHS (CONTINUED)

<b>No.</b>	<b>Description</b>	<b>Page</b>
<b>092</b>	Close-Up View of Vehicle's Certification Label	<b>A-53</b>
<b>093</b>	Close-Up View of Vehicle's Tire Information Placard or Label	<b>A-53</b>
<b>094</b>	Pre-Test Ballast View	<b>A-54</b>
<b>095</b>	Post-Test Primary and Redundant Speed Trap Read-Out	<b>A-54</b>
<b>096</b>	FMVSS No. 301 Static Rollover 0 Degrees	<b>A-55</b>
<b>097</b>	FMVSS No. 301 Static Rollover 90 Degrees	<b>A-55</b>
<b>098</b>	FMVSS No. 301 Static Rollover 180 Degrees	<b>A-56</b>
<b>099</b>	FMVSS No. 301 Static Rollover 270 Degrees	<b>A-56</b>
<b>100</b>	FMVSS No. 301 Static Rollover 360 Degrees	<b>A-57</b>
<b>101</b>	Impact Event	<b>A-57</b>
<b>102</b>	Monroney Label	<b>A-58</b>
<b>103</b>	Driver Head Restraint Use and Adjustment Information from Vehicle Owner's Manual	<b>A-58</b>
<b>104</b>	Left Rear Passenger Head Restraint Use and Adjustment Information from Vehicle Owner's Manual	<b>A-59</b>

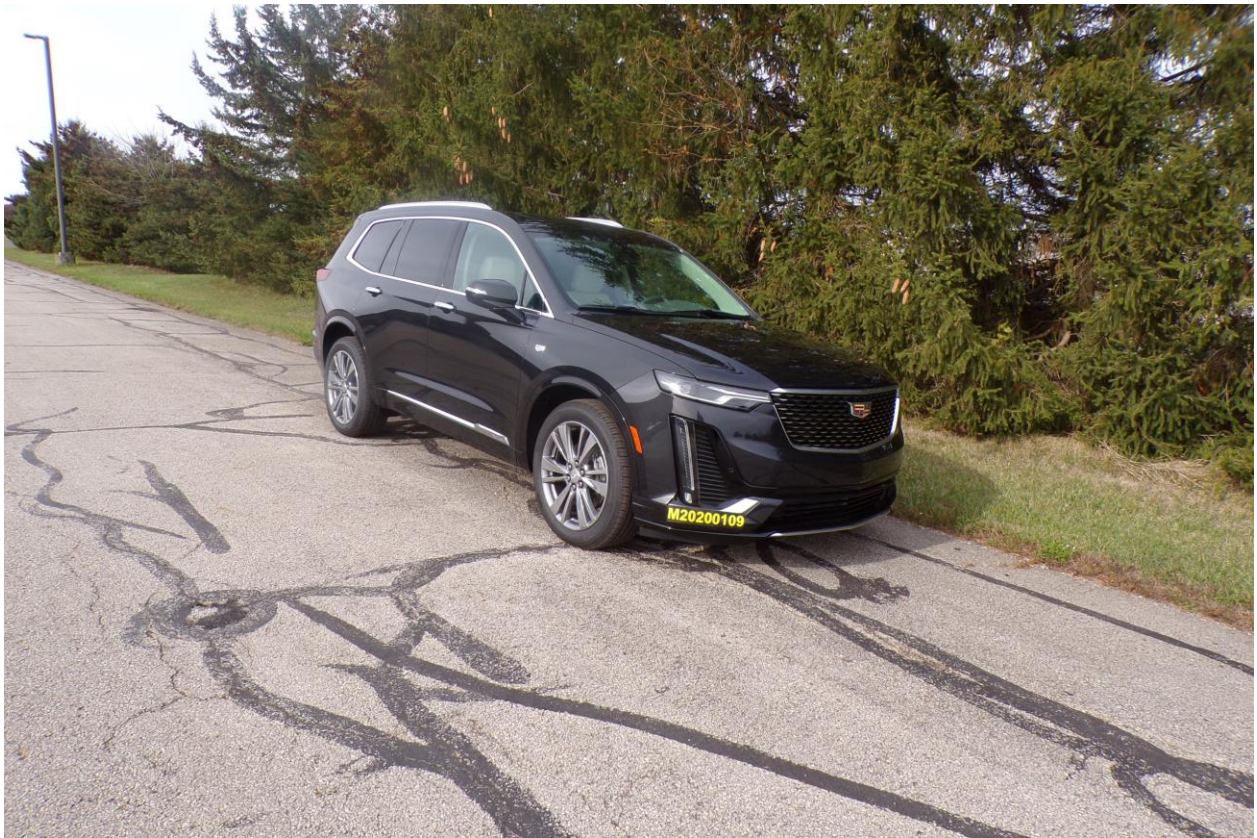

**001** As-Delivered Right Front  $\frac{3}{4}$  View of Test Vehicle



**002** As-Delivered Left Rear  $\frac{3}{4}$  View of Test Vehicle





**003** Pre-Test Frontal View of Test Vehicle



**004** Post-Test Frontal View of Test Vehicle





**005** Pre-Test Left Front  $\frac{3}{4}$  View of Test Vehicle



**006** Post-Test Left Front  $\frac{3}{4}$  View of Test Vehicle





**007** Pre-Test Left Side View of Test Vehicle



**008** Post-Test Left Side View of Test Vehicle





**009** Pre-Test Left Rear  $\frac{3}{4}$  View of Test Vehicle



**010** Post-Test Left Rear  $\frac{3}{4}$  View of Test Vehicle






**011** Pre-Test Rear View of Test Vehicle



**012** Post-Test Rear View of Test Vehicle



**013** Pre-Test Right Side View of Test Vehicle

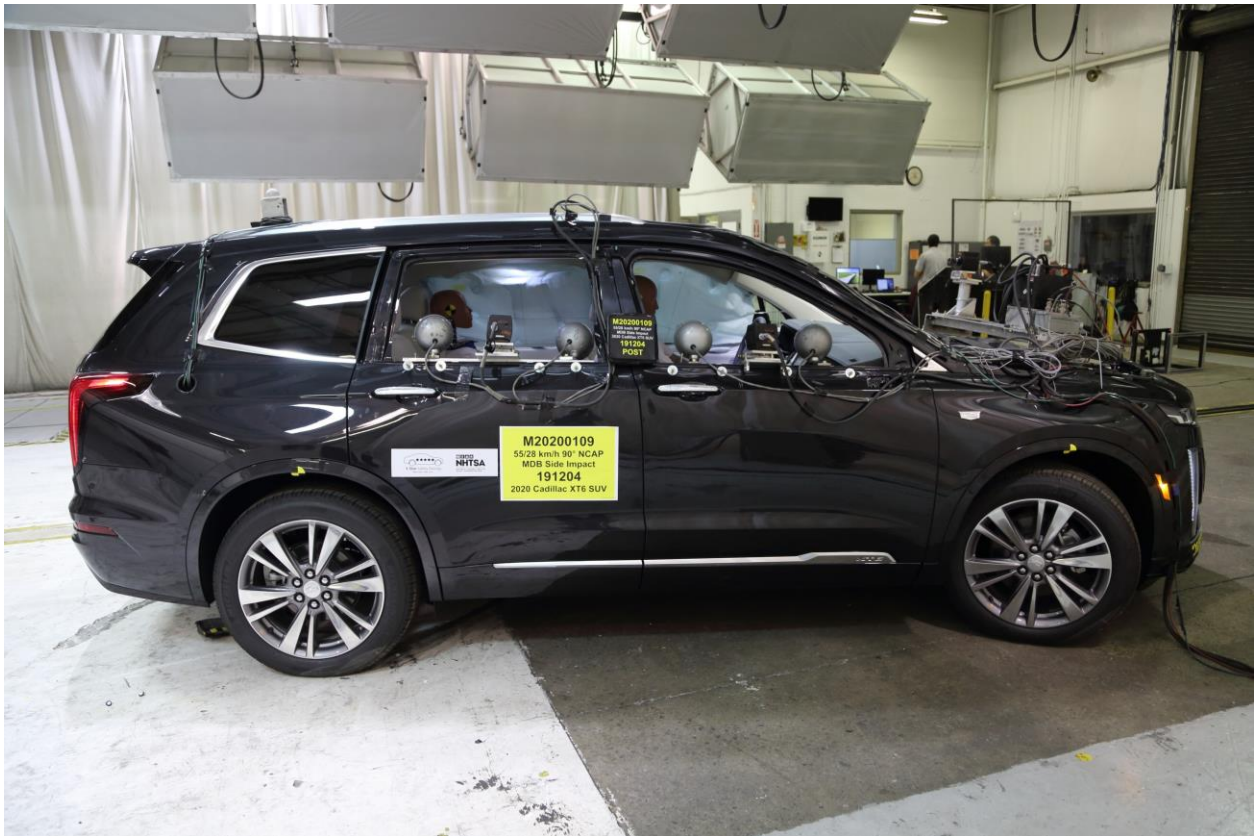


**014** Post-Test Right Side View of Test Vehicle





**015 Pre-Test Overhead View of Test Area**

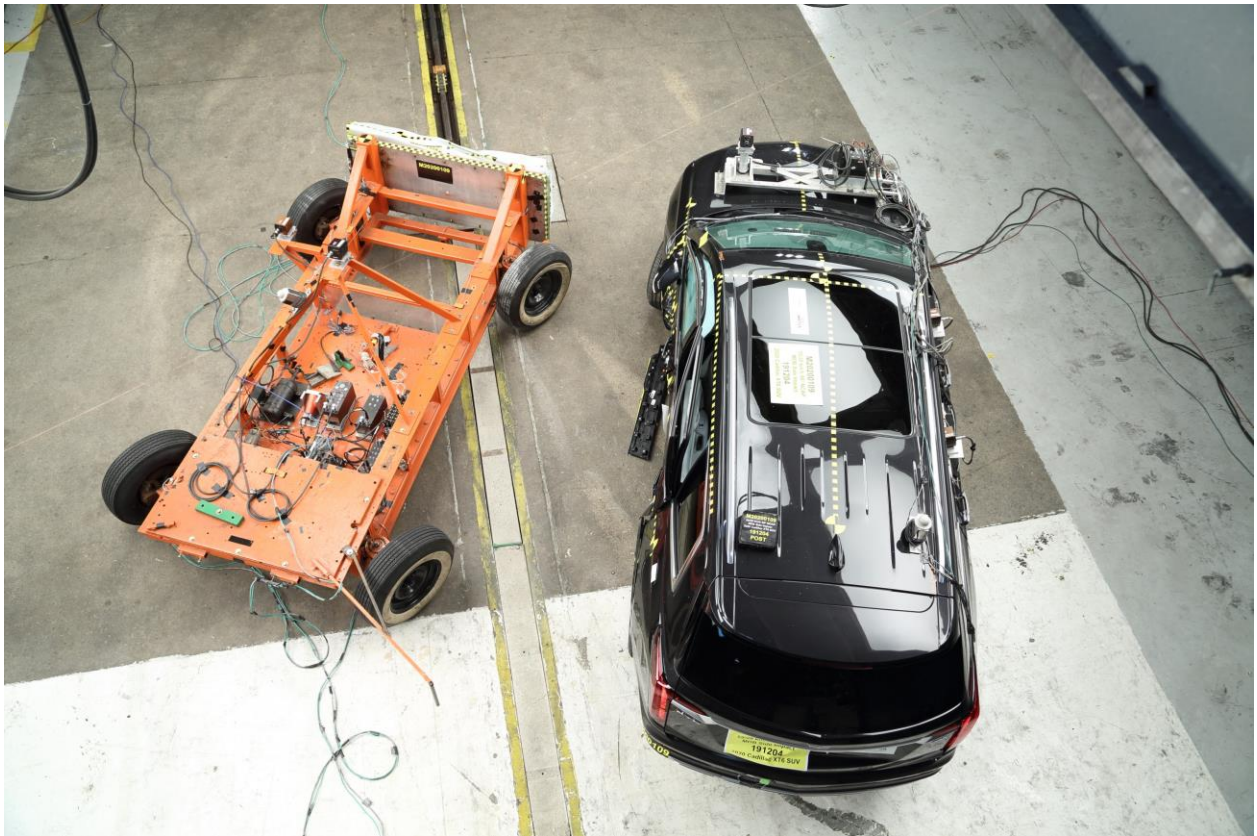

**016 Post-Test Overhead View of Test Area**





**017** Pre-Test Left Side View of MDB Positioned Against Side of Test Vehicle



**018** Pre-Test Right Side View MDB Positioned Against Side of Test Vehicle





**019** Pre-Test Close-Up View of Impact Point Target



**020** Post-Test Close-Up View of Impact Point Target

PHOTO NOT AVAILABLE

**021** Pre-Test Left Front Door Latch Close-Up



**022** Post-Test Left Front Door Latch Close-Up





**023** Pre-Test Left Rear Door Latch Close-Up



**024** Post-Test Left Rear Door Latch Close-Up



**025** Pre-Test Front Close-Up View of Driver Dummy



**026** Post-Test Front Close-Up View of Driver Dummy





**027** Pre-Test Left Side View of Driver Dummy Showing Belt and Chalking

Intentionally Left Blank



**028** Pre-Test Left Side View of Driver Dummy Shoulder and Door Top



**029** Post-Test Left Side View of Driver Dummy Shoulder and Door Top





**030** Pre-Test Frontal View of Driver Seat Back Prior to Dummy Positioning



**031** Pre-Test Frontal View of Driver Dummy Head and Shoulders in Relation to Head Restraint



**032** Pre-Test Frontal View of Driver Seat Pan Prior to Dummy Positioning



**033** Pre-Test Overhead View of Driver Dummy Thighs on Seat Pan






**034** Pre-Test Placement of Driver's Dummy Feet



**035** Pre-Test View of Belt Anchorage for Driver Dummy

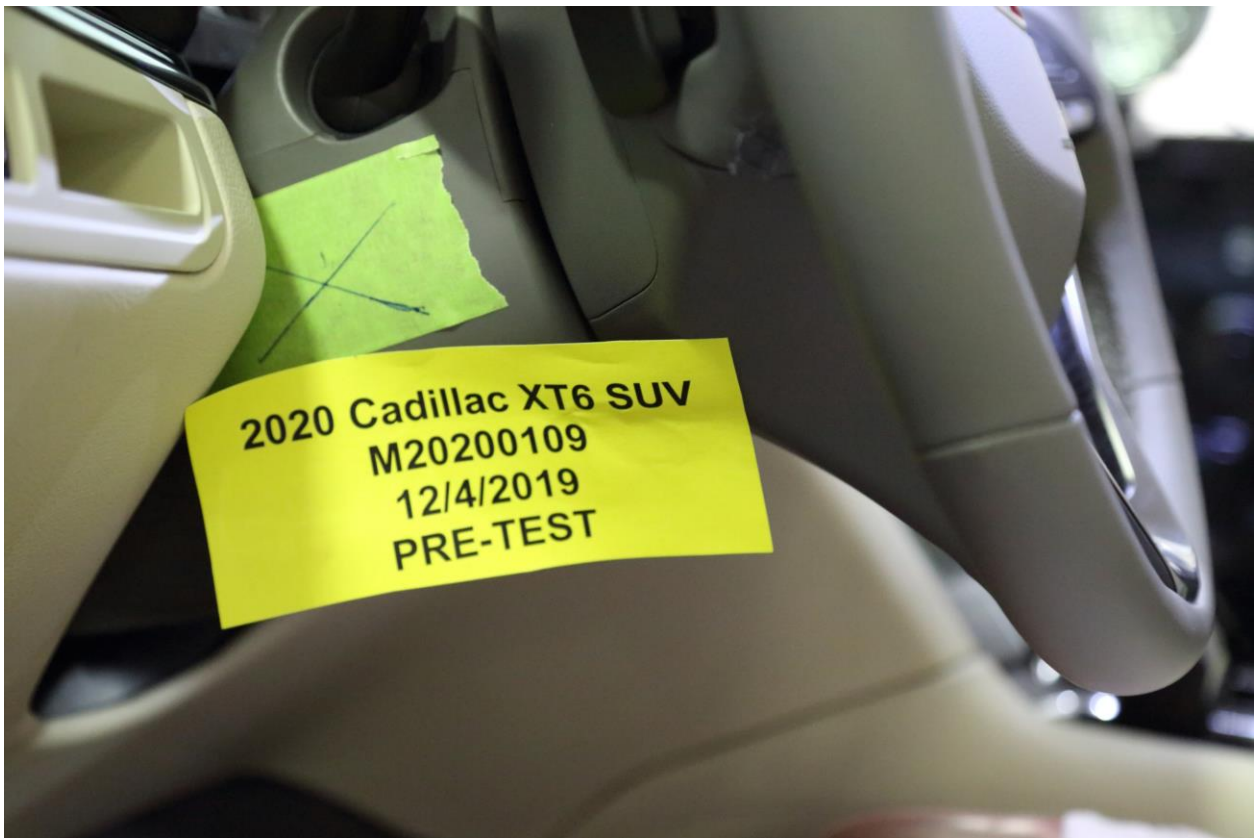


**036** Pre-Test Left Side View of Steering Wheel




**037** View of Disengaged Parking Brake




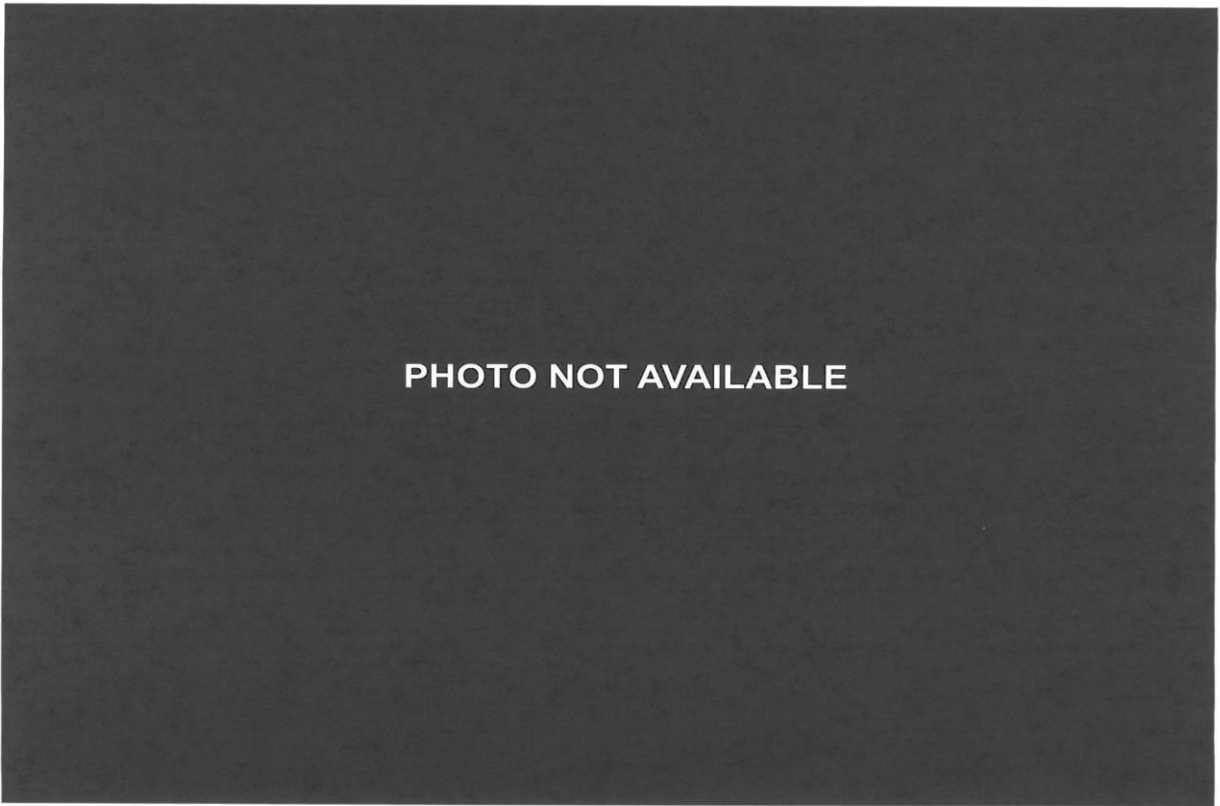

**038** Pre-Test View of Parking Brake

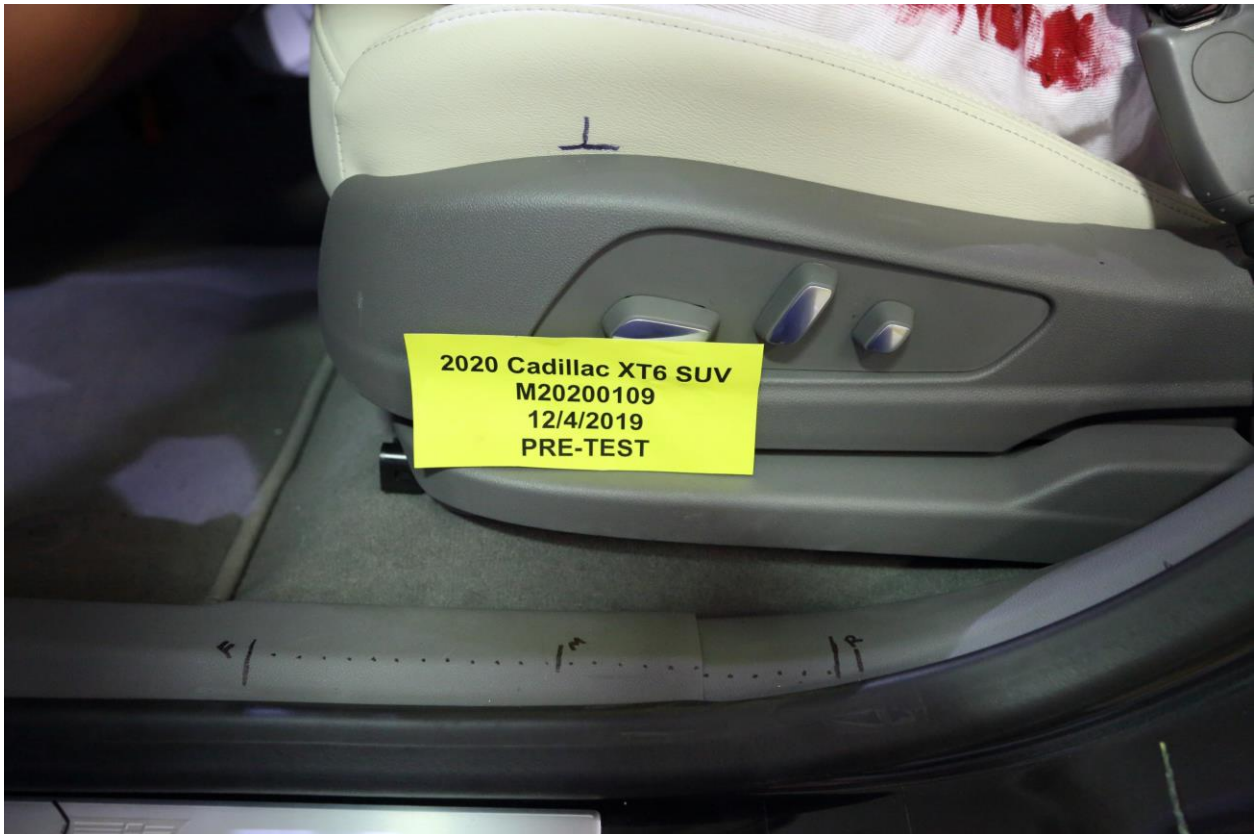

**039** Pre-Test Close-Up Left Side View of Driver Seat Track

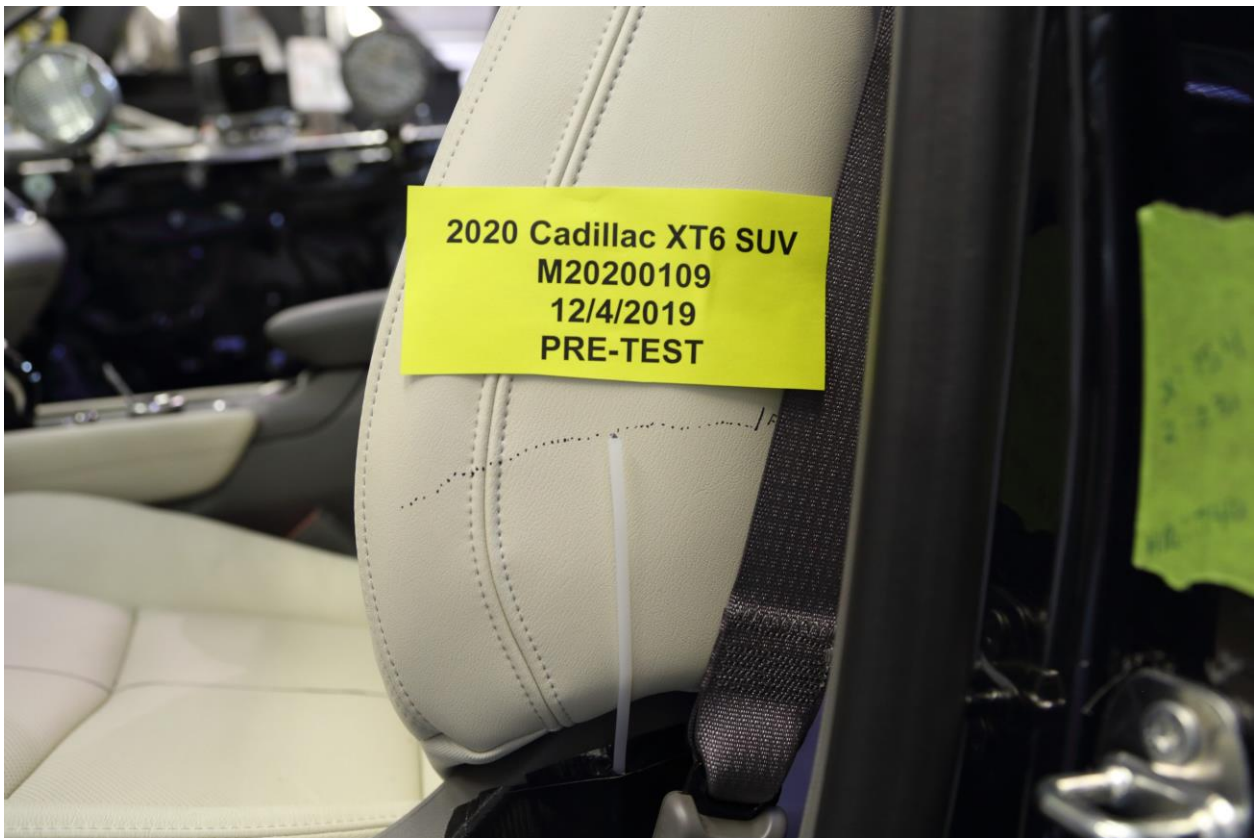

**040** Pre-Test Close-Up Left Side View of Driver Seat Back



**041** Pre-Test Close-Up View of Driver Seat Back or Head Restraint





**042** Pre-Test Driver Dummy and Door Clearance View



**043** Post-Test Driver Dummy and Door Clearance View




**044** Pre-Test Right Side View of Driver Dummy and Front Seat of Occupant Compartment



**045** Post-Test Right Side View of Driver Dummy and Front Seat of Occupant Compartment



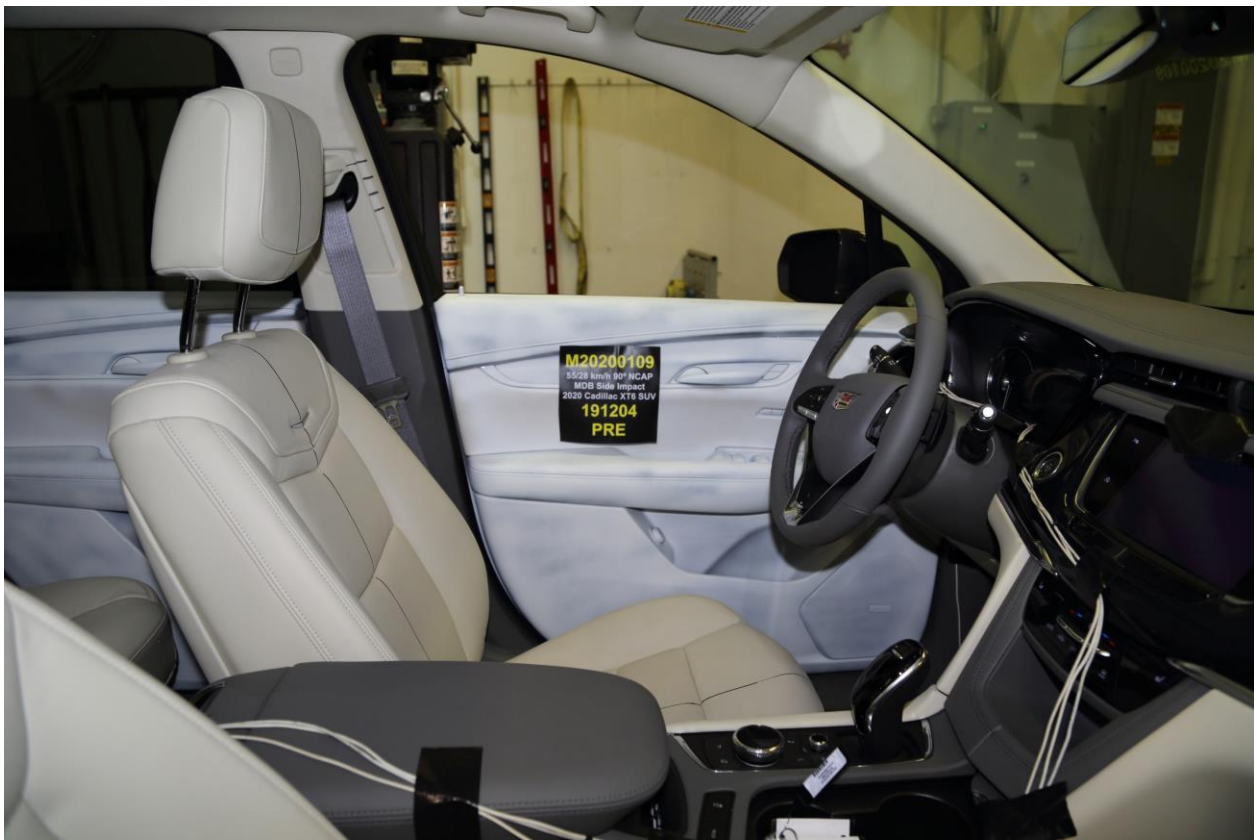

**046** Pre-Test Driver Inner Door Panel View



**047** Post-Test Driver Inner Door Panel View Showing Driver Dummy Contact Locations

PHOTO NOT APPLICABLE

**048** Post-Test Driver Dummy Close-Up Head Contact with Vehicle View



**049** Post-Test Driver Dummy Close-Up Head Contact with Side Airbag View






**050** Post-Test Driver Dummy Close-Up Torso Contact with Vehicle Interior View



**051** Post-Test Driver Dummy Close-Up Torso Contact with Side Airbag View




**052** Post-Test Driver Dummy Close-Up Pelvis Contact View

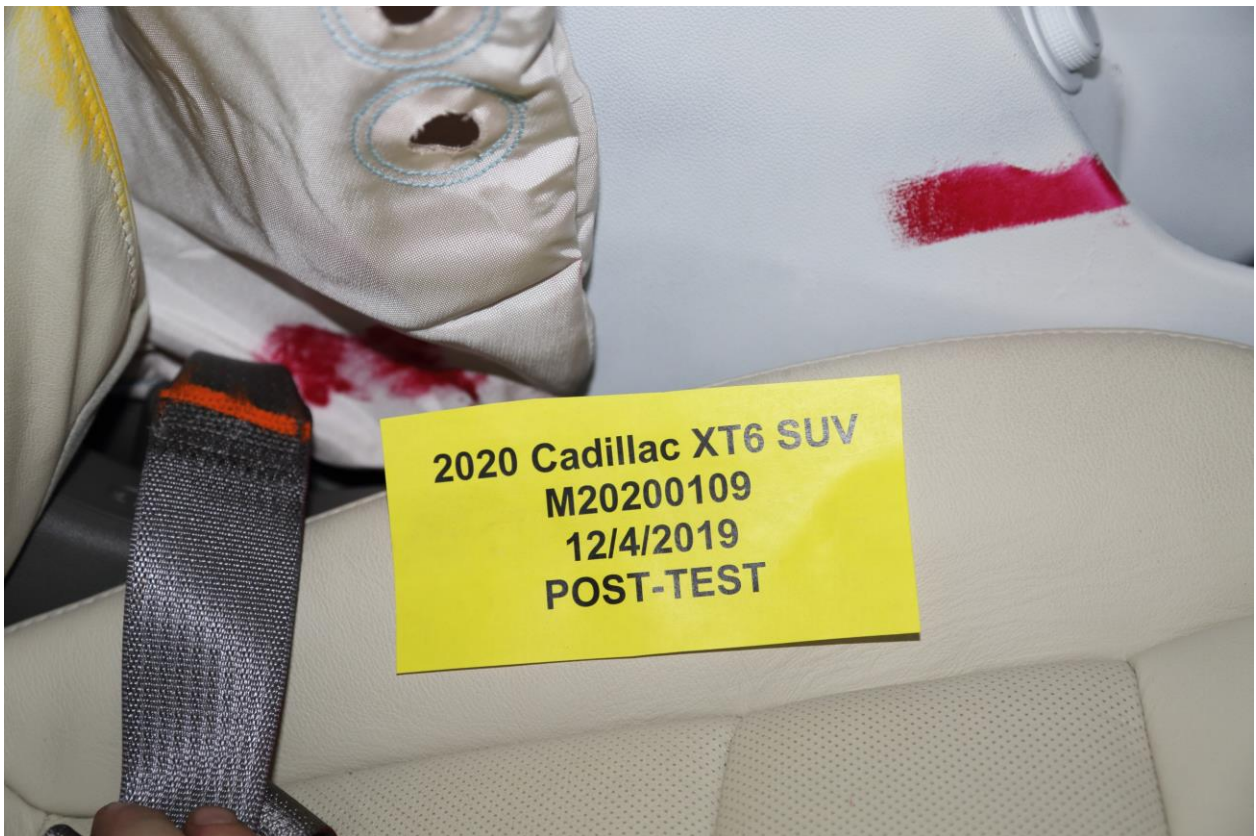

**053** Post-Test Driver Dummy Close-Up Pelvis Contact with Side Airbag View



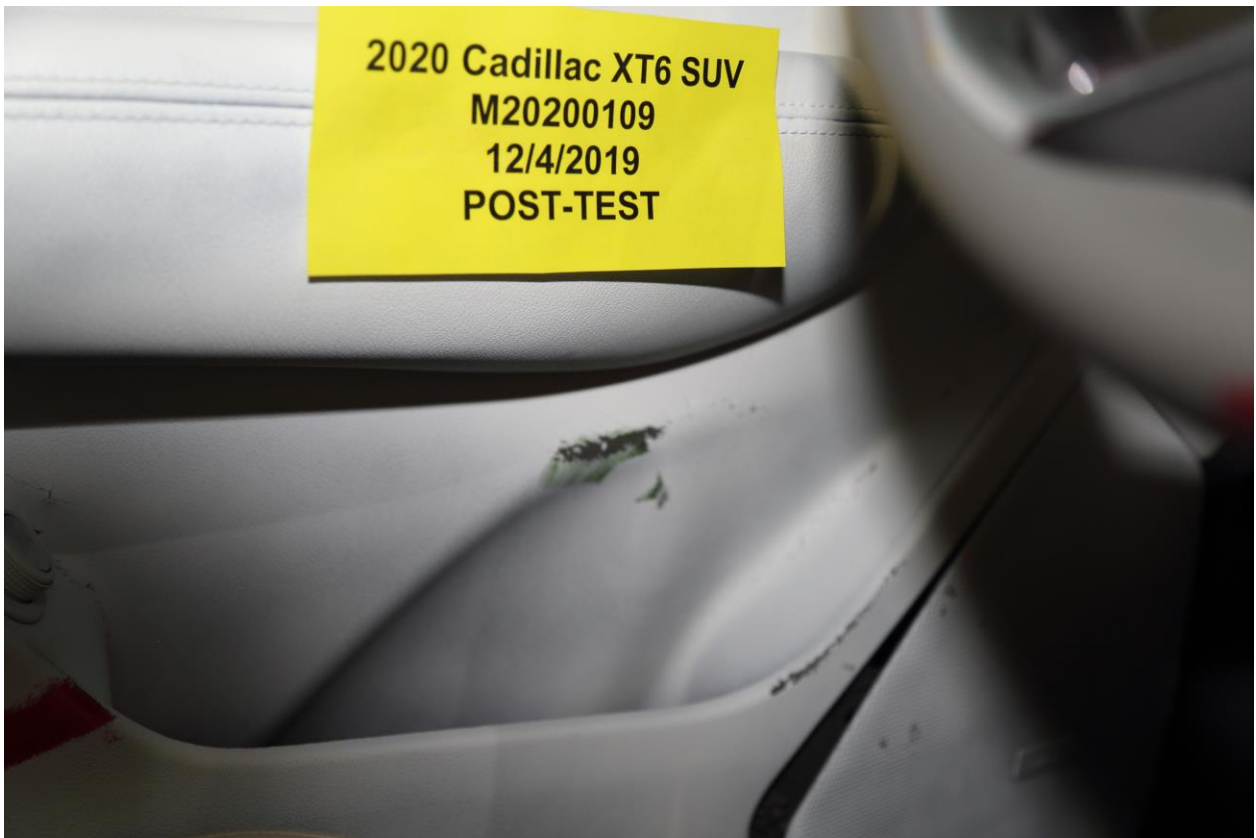

**054** Post-Test Driver Dummy Close-Up Knee Contact View



**055** Pre-Test Left Side View of Passenger Dummy Showing Belt and Chalking



**056** Pre-Test Left Side View of Passenger Dummy Shoulder and Door Top View




**057** Post-Test Left Side View of Passenger Dummy Shoulder and Door Top View






**058** Pre-Test Frontal View of Rear Passenger Seat Back Prior to Dummy Positioning

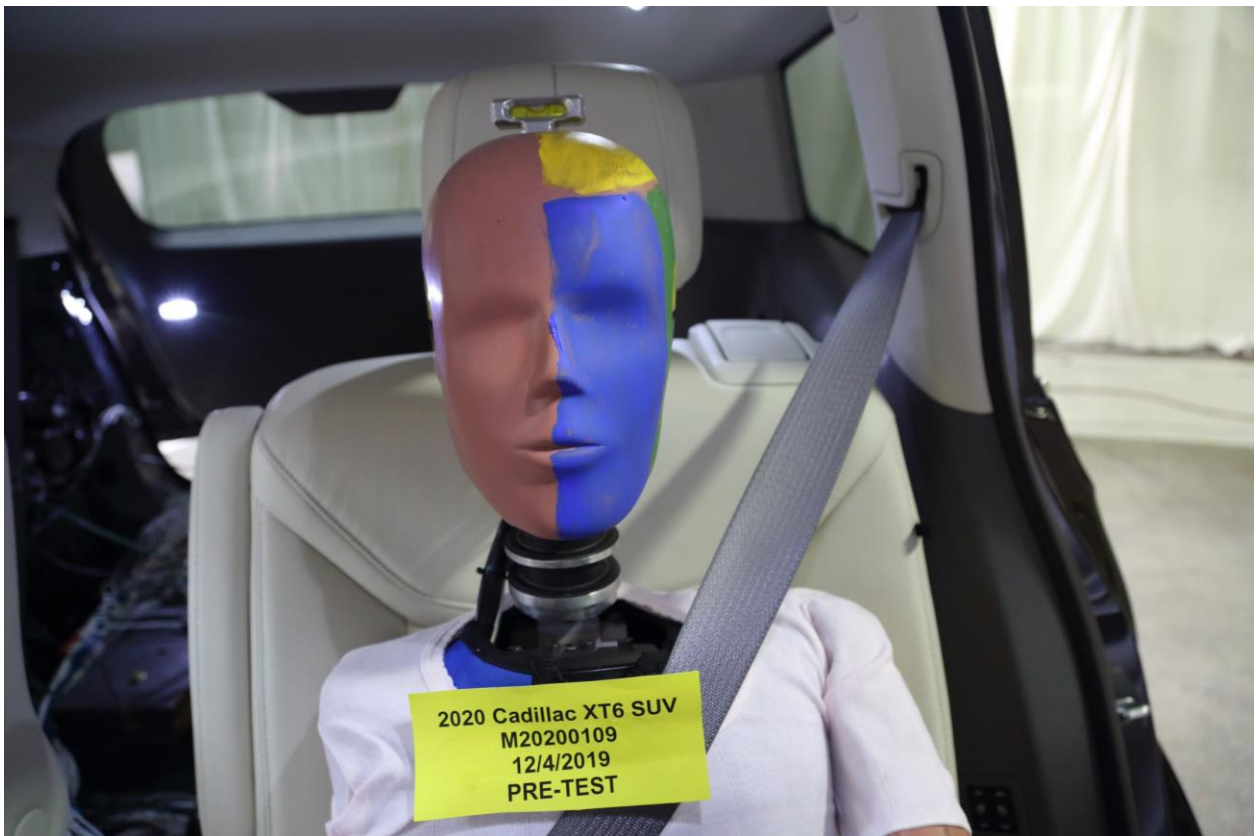

**059** Pre-Test Frontal View of Rear Passenger Dummy Head and Shoulders in Relation to Head Restraint

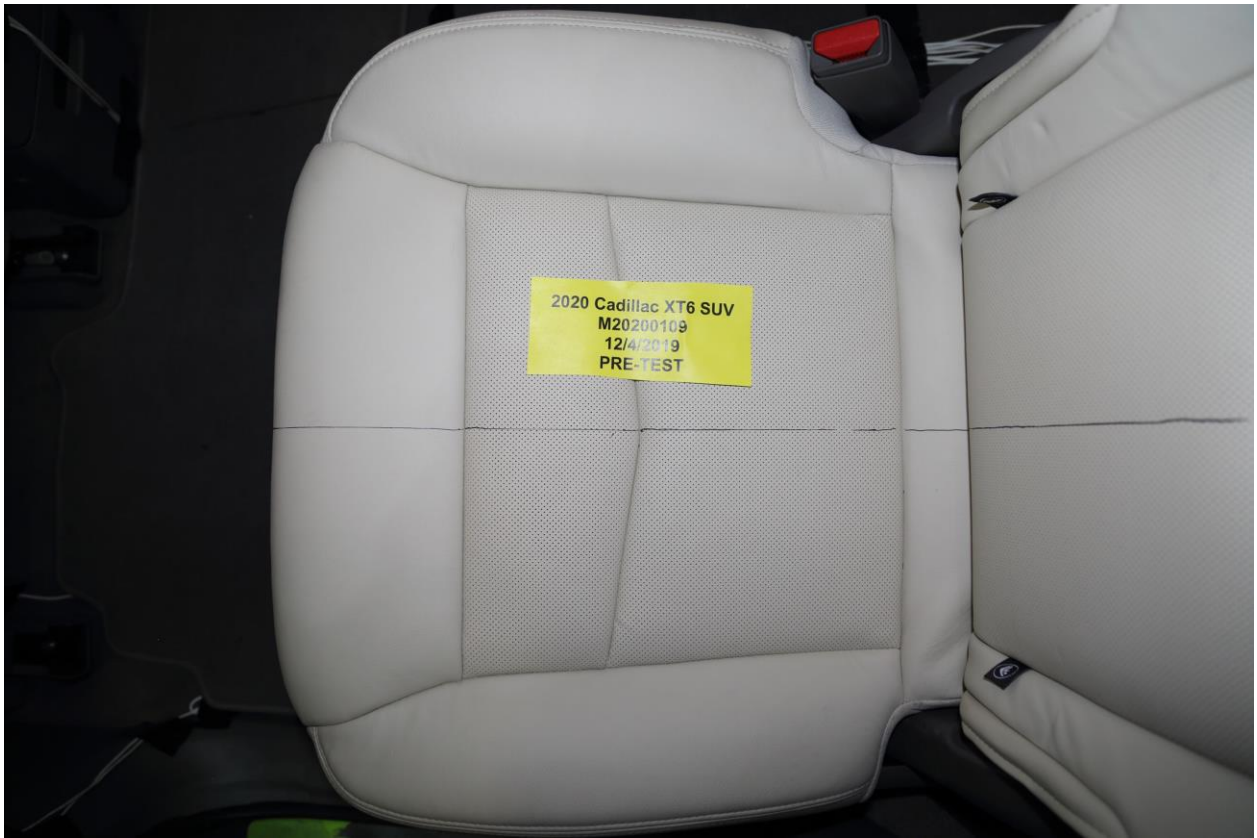

**060** Pre-Test Overhead View of Rear Passenger Seat Pan Prior to Dummy Positioning



**061** Pre-Test Overhead View of Rear Passenger Dummy Thighs on Seat Pan





**062** Pre-Test View of Rear Passenger Dummy's Neck Showing Position of Adjustable Neck Bracket



**063** Pre-Test View of Rear Passenger Dummy's Head Showing Dummy Head is Level



**064** Pre-Test Placement of Rear Passenger Dummy's Feet



**065** Pre-Test View of Belt Anchorage for Rear Passenger Dummy



**066** Pre-Test Close-Up Left Side View of Rear Passenger Seat Track



**067** Pre-test Close-Up Left Side View of Rear Passenger Seat Back





**068** Pre-Test Close-Up View of Rear Passenger Seat Back or Head Restraint

Intentionally Left Blank



**069** Pre-Test Rear Passenger Dummy and Door Clearance View



**070** Post-Test Rear Passenger Dummy and Door Clearance View






**071** Pre-Test Right Side View of Rear Passenger Dummy and Rear Seat Occupant Compartment



**072** Post-Test Right Side View of Rear Passenger Dummy and Rear Seat Occupant Compartment



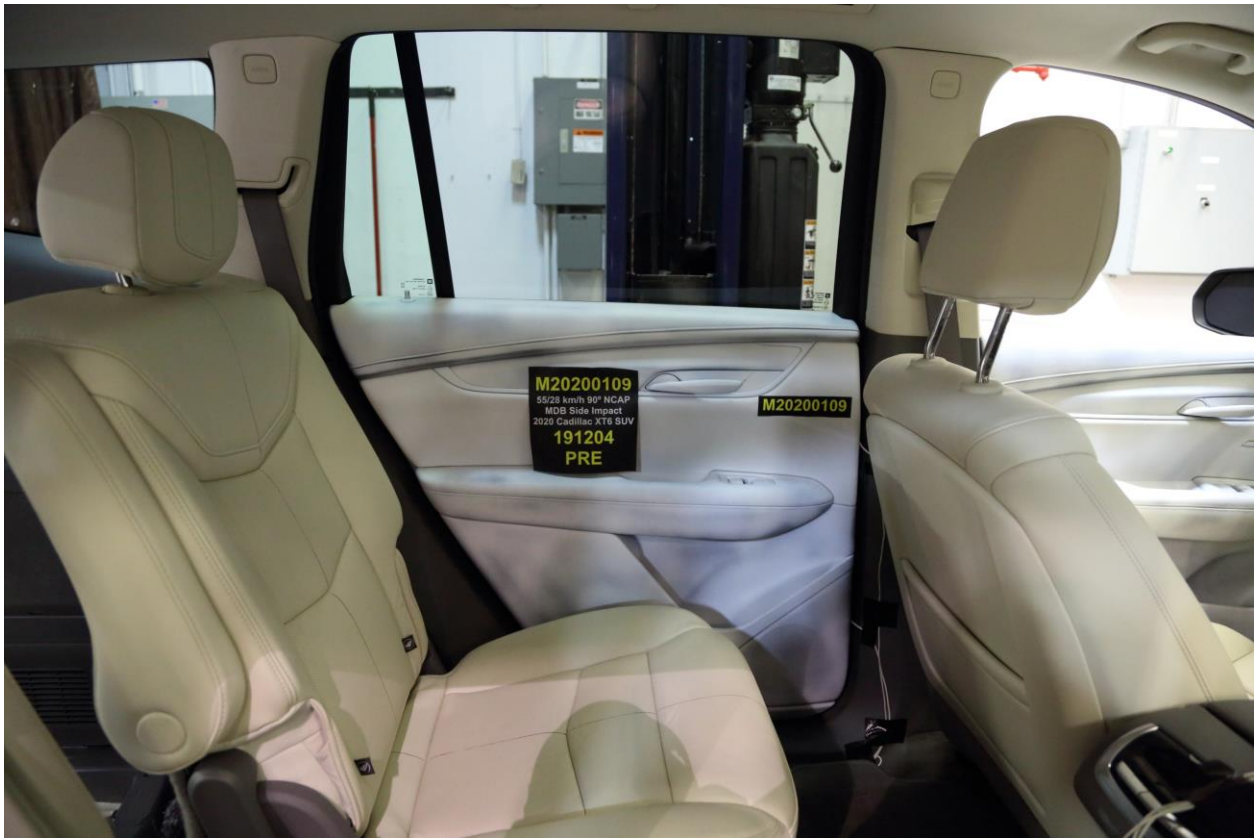

**073** Pre-Test Rear Passenger Inner Door Panel View




**074** Post-Test Rear Passenger Inner Door Panel View

PHOTO NOT APPLICABLE


**075** Post-Test Rear Passenger Dummy Close-Up Head Contact with Vehicle View



**076** Post-Test Rear Passenger Dummy Close-Up Head Contact with Side Airbag View

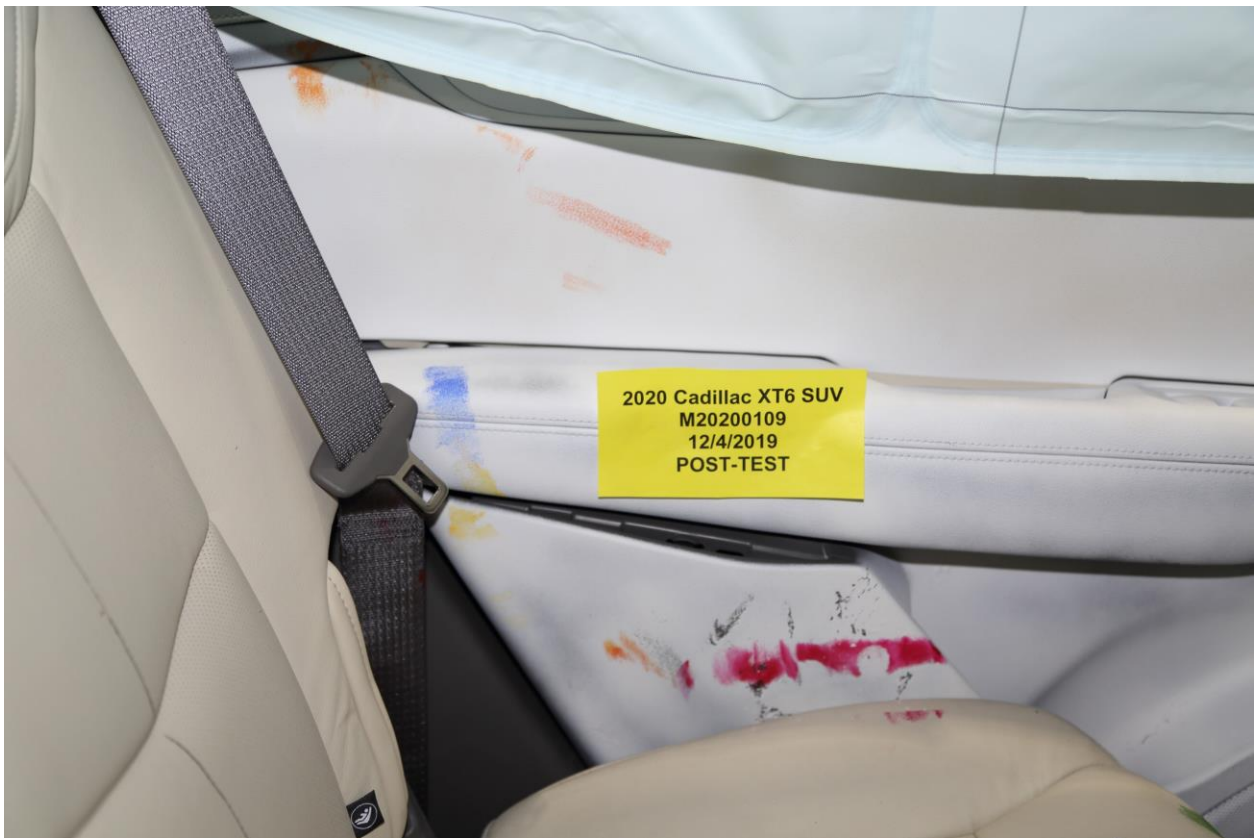


**077** Post-Test Rear Passenger Dummy Close-Up Torso Contact with Vehicle Interior View

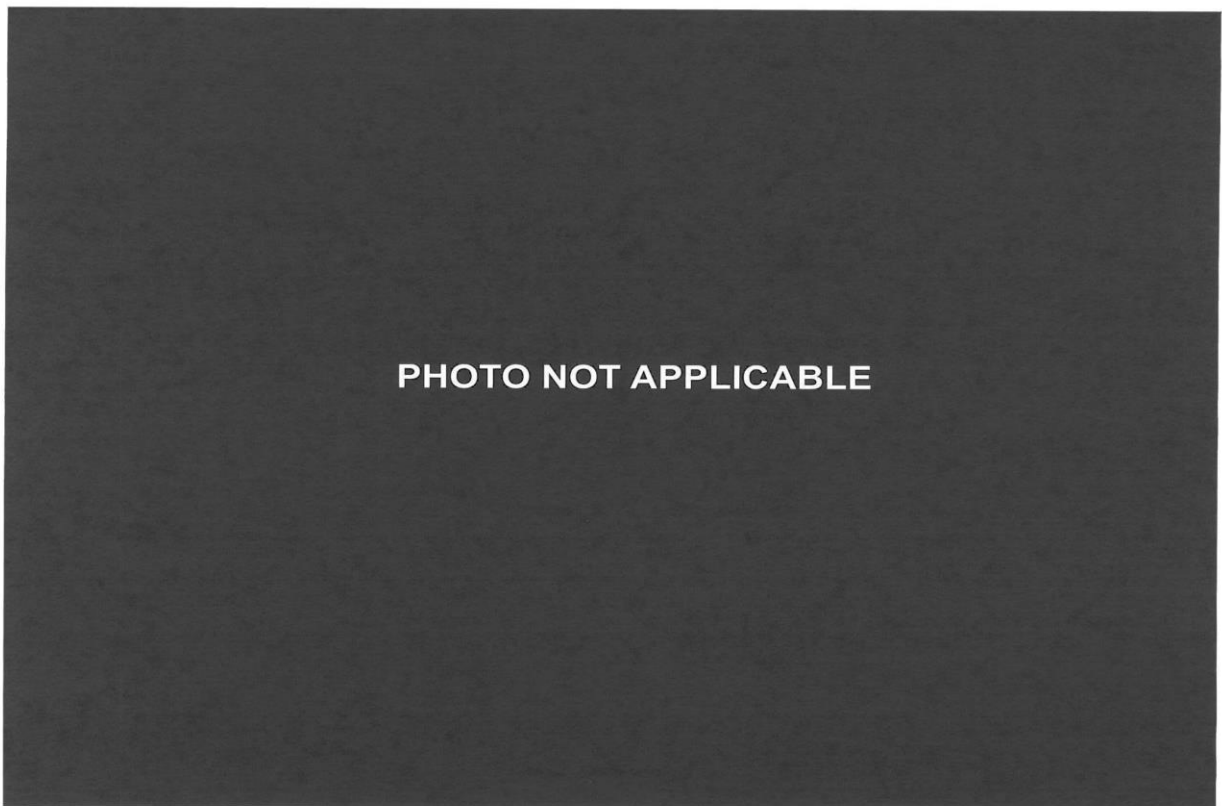


**078** Post-Test Rear Passenger Dummy Close-Up Torso Contact with Side Airbag View



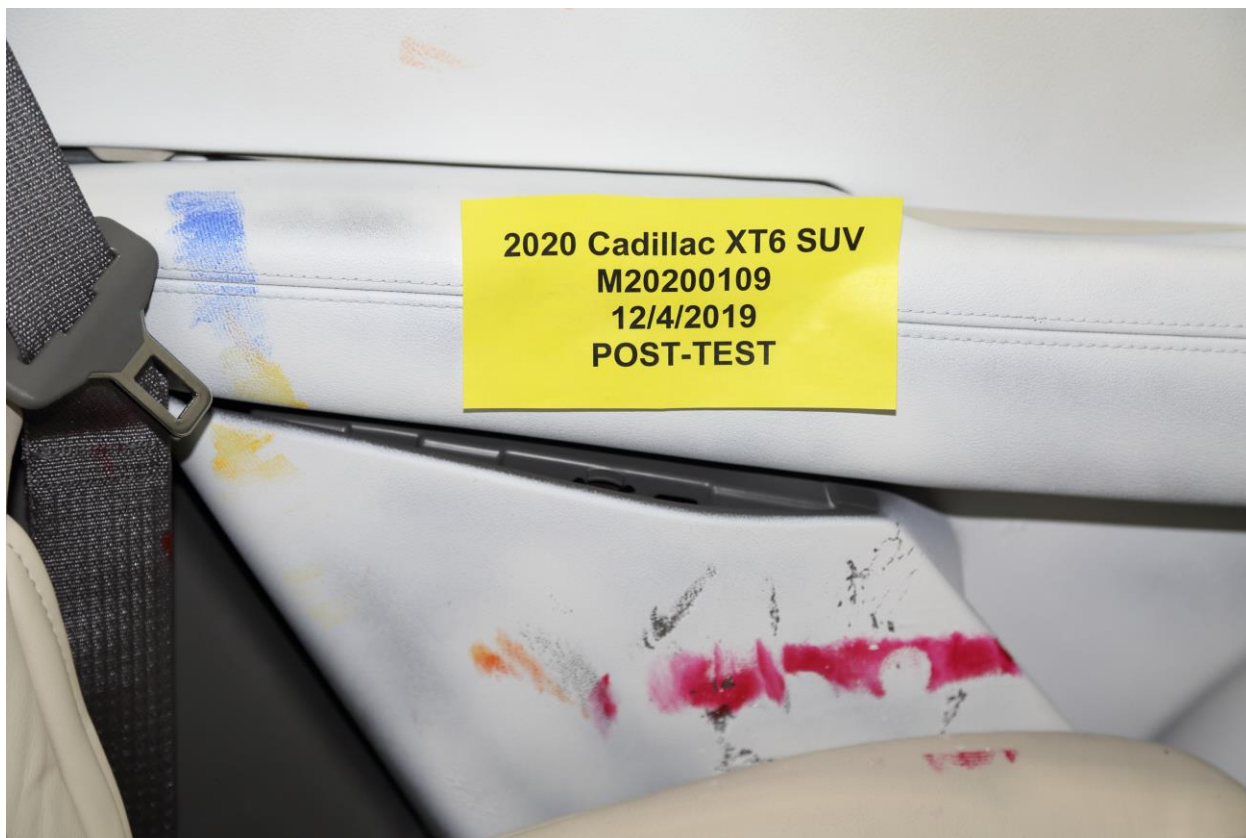

**079** Post-Test Rear Passenger Dummy Close-Up Pelvis Contact View

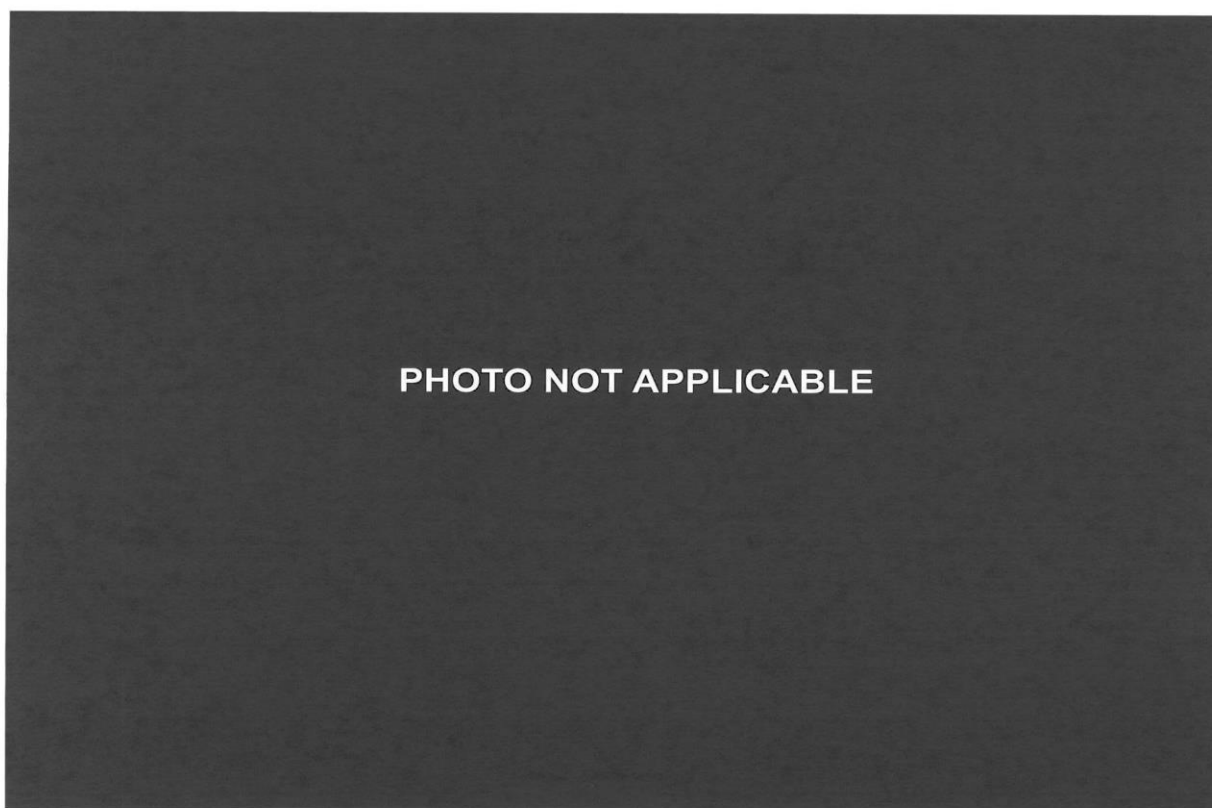

**080** Post-Test Rear Passenger Dummy Close-Up Pelvis Contact with Side Airbag View

PHOTO NOT APPLICABLE

**081** Post-Test Rear Passenger Dummy Close-Up Knee Contact View

Intentionally Left Blank



**082** Pre-Test View of Fuel Filler Cap or Fuel Filler Neck



**083** Post-Test View of Fuel Filler Cap or Fuel Filler Neck





**084** Pre-Test Front View of MDB Impactor Face



**085** Post-Test Front View of MDB Impactor Face



**086** Pre-Test Top View of MDB Impactor Face



**087** Post-Test Top View of MDB Impactor Face





**088** Pre-Test Left Side View of MDB Impactor Face




**089** Post-Test Left Side View of MDB Impactor Face







**090** Pre-Test Right Side View of MDB Impactor Face

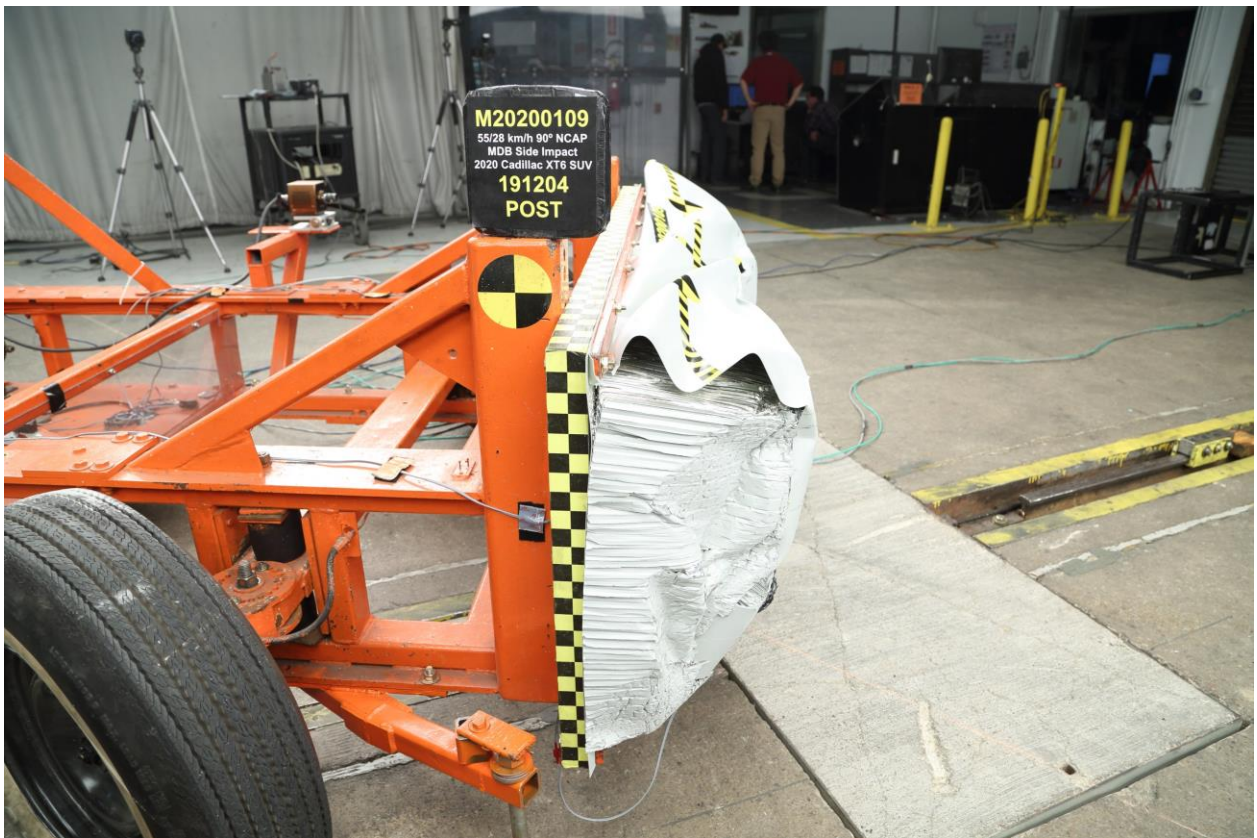

**091** Post-Test Right Side View of MDB Impactor Face

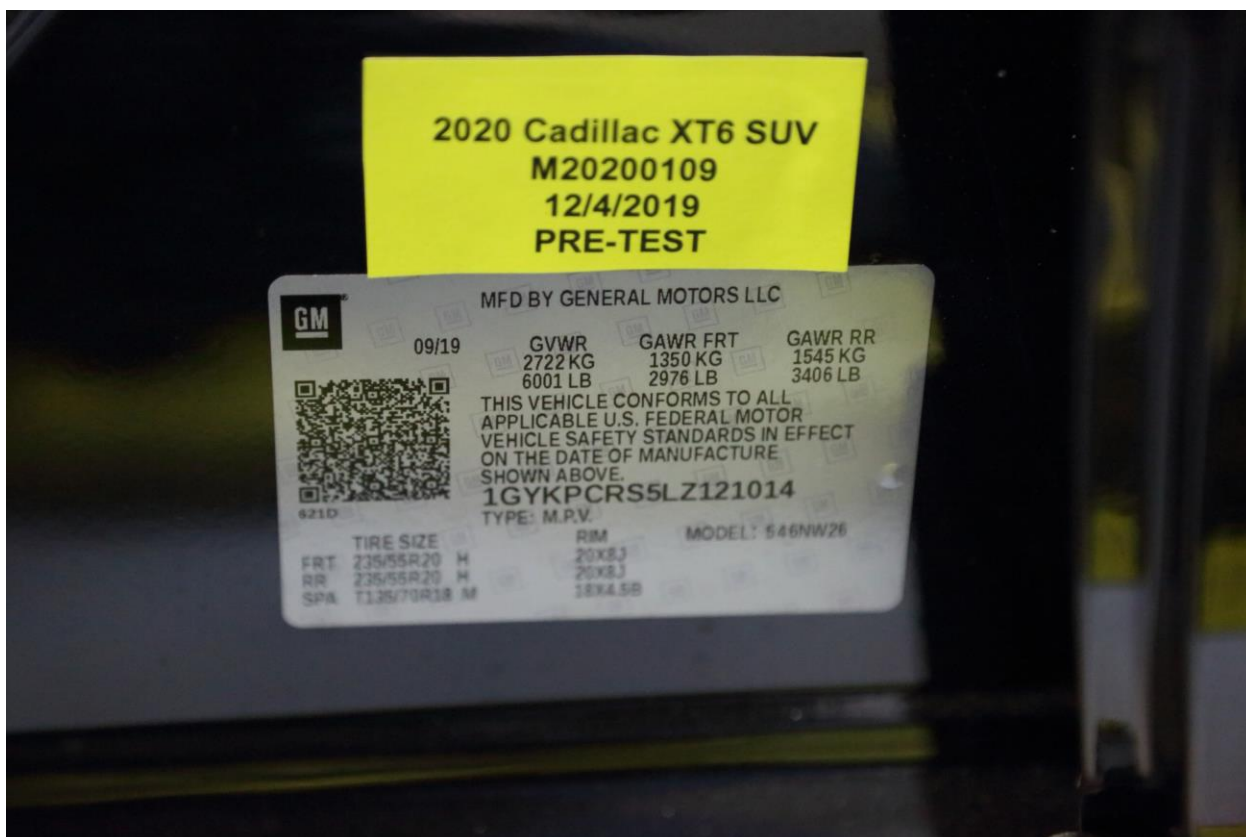


**092** Close-Up View of Vehicle's Certification Label

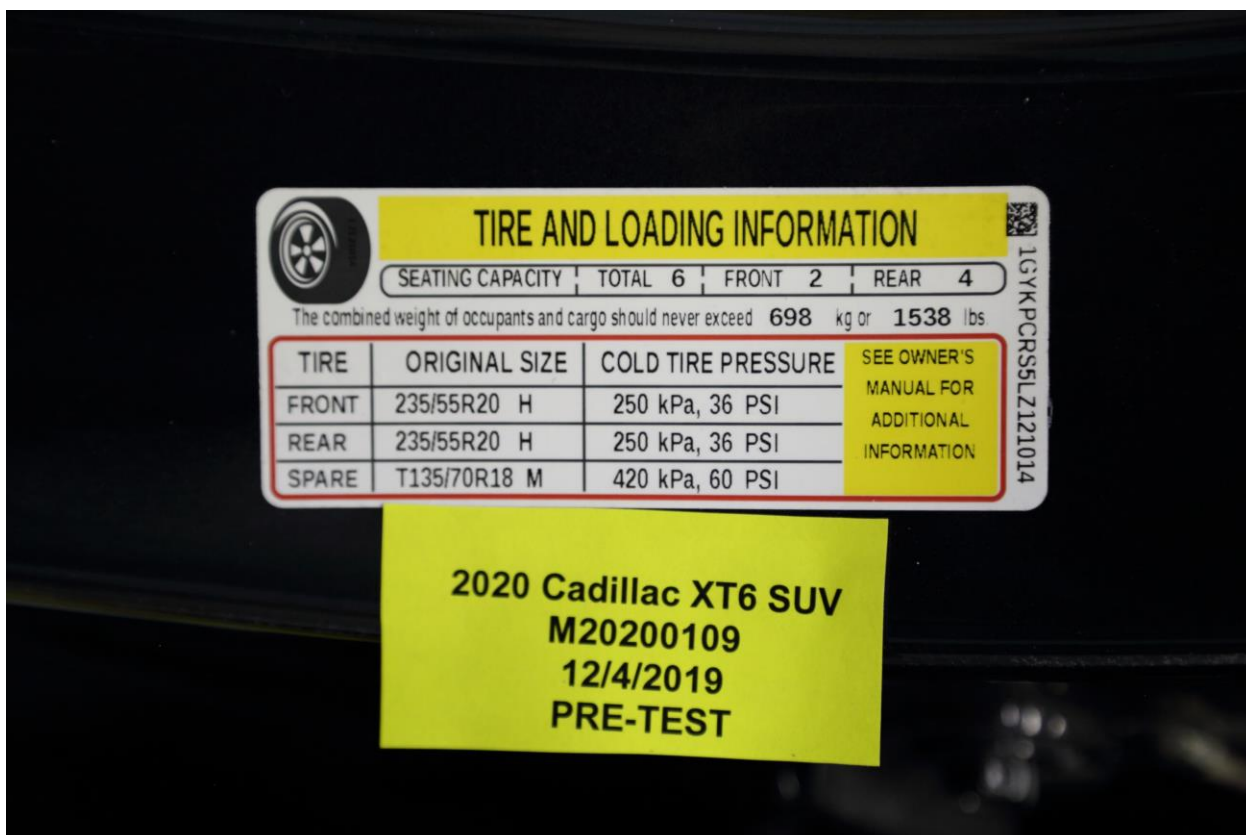

**093** Close-Up View of Vehicle's Tire Information Placard or Label



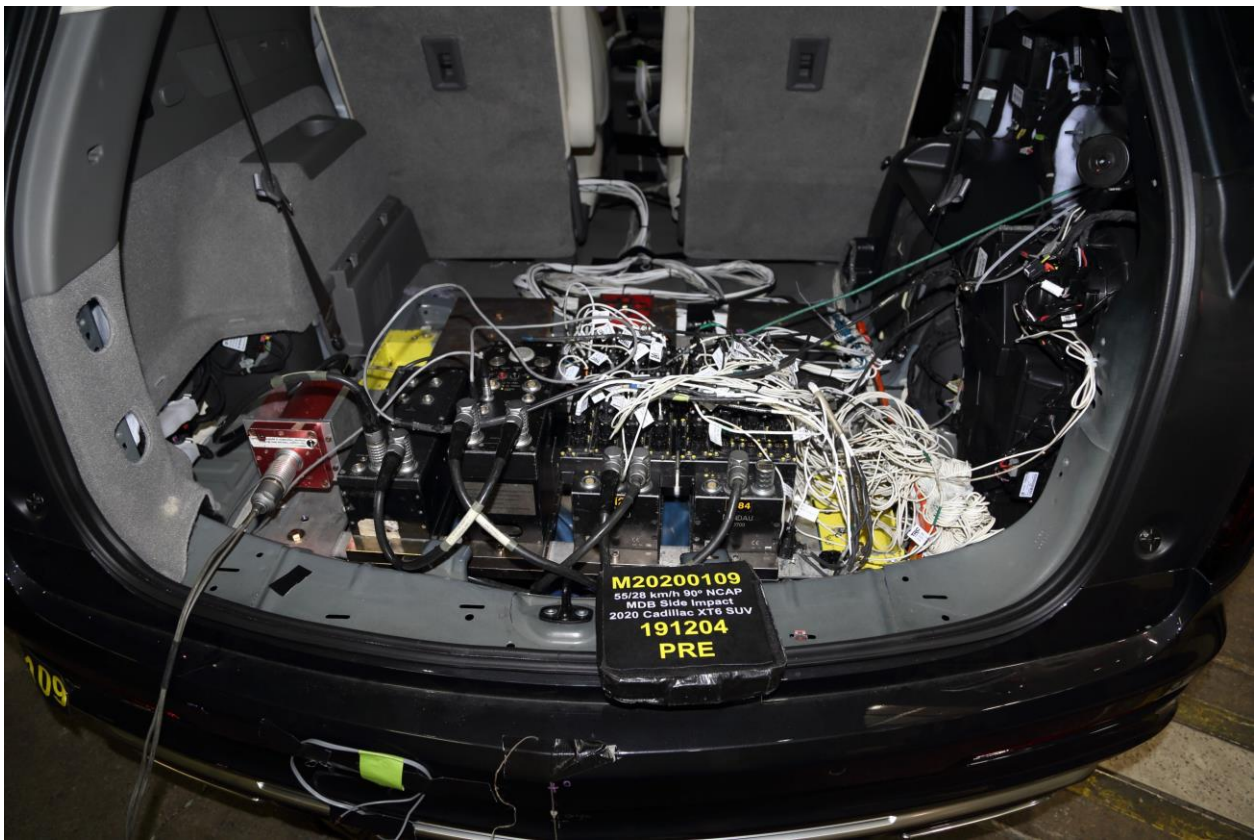

**094** Pre-Test Ballast View



**095** No. Post-Test Primary and Redundant Speed Trap Read-Out






**096 FMVSS No. 301 Static Rollover 0 Degrees**




**097 FMVSS No. 301 Static Rollover 90 Degrees**



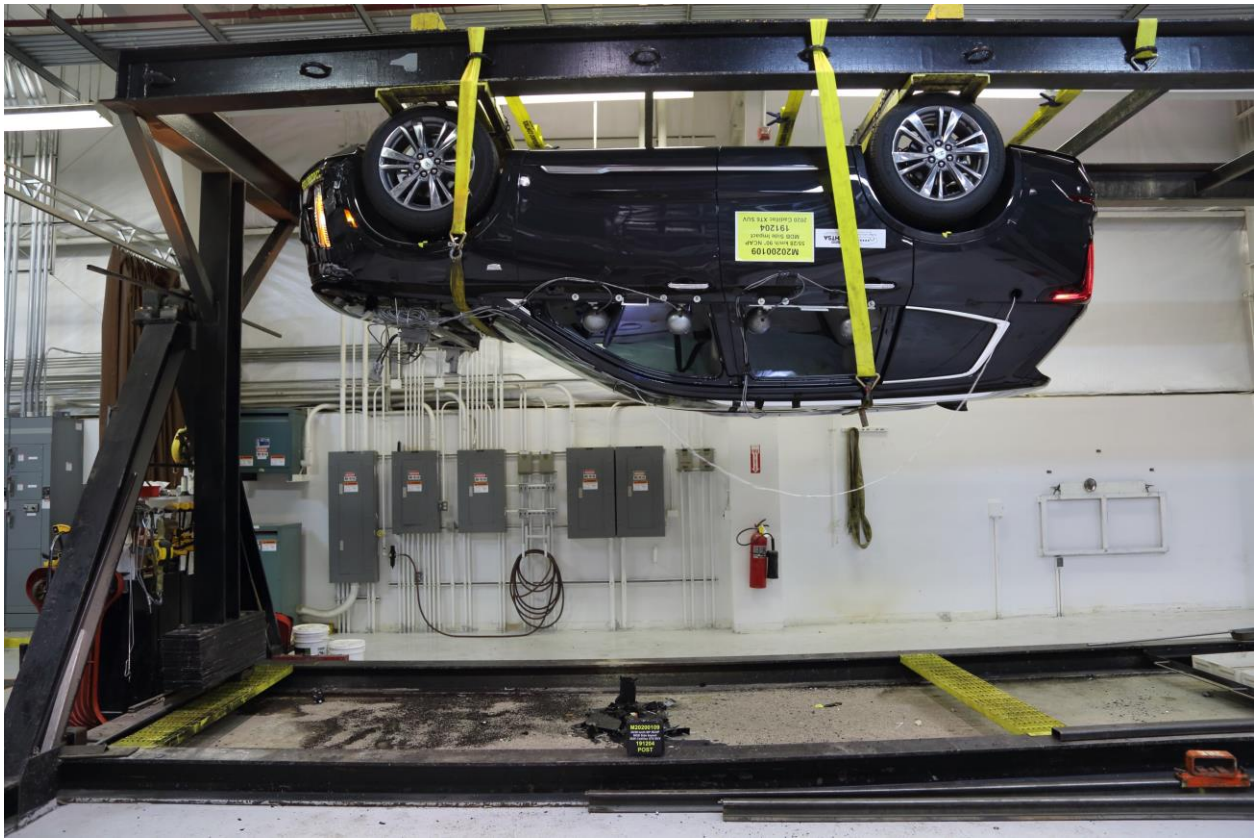


**098** FMVSS No. 301 Static Rollover 180 Degrees

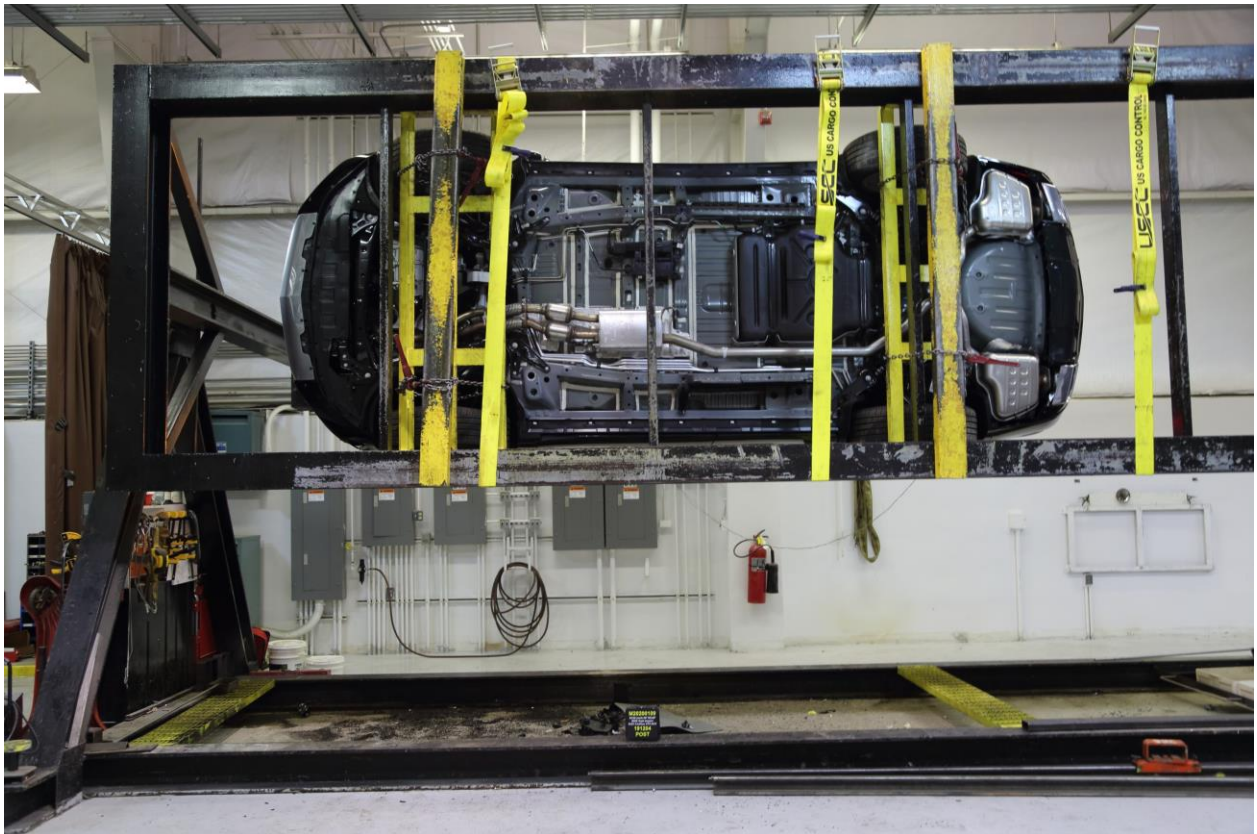

**099** FMVSS No. 301 Static Rollover 270 Degrees



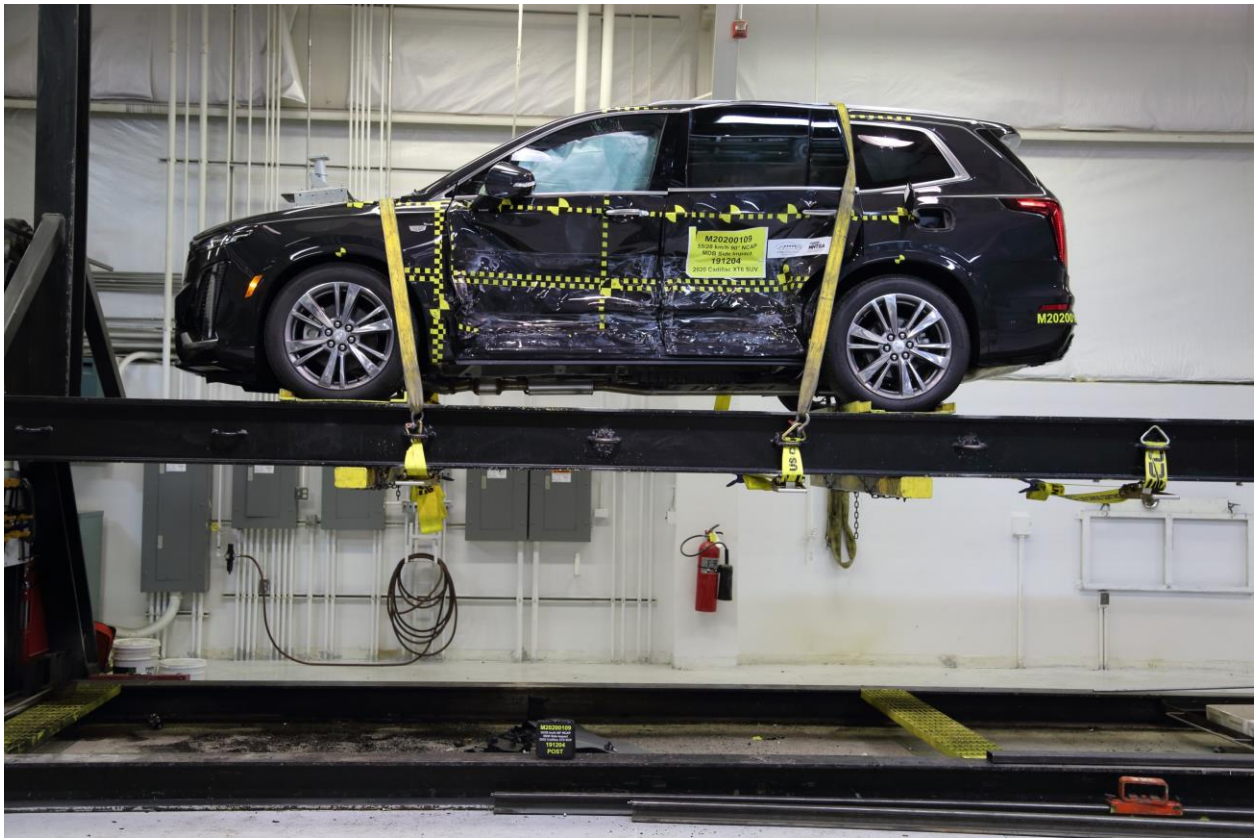

**100** FMVSS No. 301 Static Rollover 360 Degrees



**101** Impact Event





## 2020 XT6 PREMIUM LUXURY FWD

EXTERIOR: MANHATTAN NOIR  
METALLIC  
INTERIOR: CIRRUS W/ DARK TITANIUM  
ACCENTS

ENGINE: 3.6L V6, DI, VVT  
TRANSMISSION: 9-SPEED AUTOMATIC

Visit us at [www.cadillac.com](http://www.cadillac.com)

### STANDARD EQUIPMENT

#### OWNER BENEFITS

- 4 YEAR / 50,000 MILE\* BUMPER-TO-BUMPER LIMITED WARRANTY
- 6 YEAR / 70,000 MILE\* POWERTRAIN LIMITED WARRANTY, ROADSIDE ASSISTANCE & COURTESY TRANSPORTATION
- FIRST MAINTENANCE VISIT
- "WHICHEVER COMES FIRST" SEE CADILLAC.COM OR DEALER FOR DETAILS AND LIMITS
- ONSTAR (R) SERVICES & 4G LTE Wi-Fi (R) AVAILABLE; SEE ONSTAR.COM FOR TERMS

#### PERFORMANCE

- FRONT-WHEEL DRIVE WITH DRIVER SELECT MODE

### LUXURY & CONVENIENCE

- MEMORY PACKAGE
- SEATING, 7-PASSENGER
- SEAT, FRONT BUCKET LEATHER SEATING SURFACES
- POWER LUMBAR, DRIVER SEAT
- SEAT ADJUSTER, PWR PASSENGER LUMBAR CONTROL
- PWR SEAT ADJUST, DRIVER 8 WAY
- DRIVER & FRONT PASSENGER HEATED SEATS
- ULTRAVIEW SUNROOF
- TRI-ZONE CLIMATE CONTROL
- STEERING WHEEL, HEATED
- STEERING COLUMN, POWER TILT & TELESCOPIC
- LEATHER WRAP STEERING WHEEL
- WHEELS, 20" 8-SPLIT SPOKE WITH POLISHED/ANDROID FINISH
- HEADLAMPS, LED
- DAYTIME RUNNING LAMPS, LED
- HANDS FREE LIFTGATE
- TIRE, COMPACT SPARE

- AUTOMATIC STOP/START, WITH DISABLE
- POWER FOLDING 3RD ROW
- SAFETY & SECURITY**
- INTELLIBEAM HEADLAMPS
- KEYLESS ACCESS, PASSIVE ENTRY
- ADAPTIVE REMOTE START
- SAFETY ALERT SEAT
- TEEN DRIVER
- FRONT AND REAR PARK ASSIST
- FOLLOWING DISTANCE INDICATOR
- FORWARD COLLISION ALERT
- REAR CROSS TRAFFIC ALERT
- LANE KEEP ASSIST W/ LANE DEPARTURE WARNING
- AUTOMATIC EMERGENCY BRAKING
- LANE CHANGE ALERT WITH SIDE BLIND ZONE ALERT
- FRONT PEDESTRIAN BRAKING
- THEFT-DETERRENT ALARM SYSTEM, SELF-POWERED
- SENSOR, VEHICLE INCLINATION

- SENSOR, INTERIOR VEHICLE MOVEMENT
- WINDSHIELD WIPERS, RAIN SENSING
- LAMPS, FRONT PARK & CORNERING
- HD REAR VISION CAMERA W/WASH
- CONNECTIVITY FEATURES**
- CADILLAC USER EXPERIENCE
- 8" DIAGONAL COLOR DISPLAY
- APPLE CARPLAY (R) & ANDROID AUTO (R) CAPABILITY AVAILABLE W/ COMPATIBLE SMARTPHONES, NATURAL VOICE RECOGNITION
- WIRELESS DEVICE CHARGING
- SIRIUSXM RADIO CAPABLE, ALL ACCESS TRIAL W/ SUBSCRIPTION SOLD SEPARATELY
- AUDIO SYSTEM, BOSE PREMIUM 8 SPEAKER

MANUFACTURER'S SUGGESTED RETAIL PRICE  
STANDARD VEHICLE PRICE **\$52,695.00**

### OPTIONS & PRICING

OPTIONS INSTALLED BY THE MANUFACTURER (MAY REPLACE STANDARD EQUIPMENT PRICING)	
SEATING, 6 PASSENGER, 2ND ROW	800.00
FOLDING CAPTAIN CHAIRS	
MANHATTAN NOIR METALLIC	625.00
ALL-WEATHER FLOOR LINER, 1ST, 2ND AND 3RD ROWS (DEALER INSTALLED)	285.00
TOTAL OPTIONS	
TOTAL VEHICLE & OPTIONS	\$54,405.00
DESTINATION CHARGE	995.00
TOTAL VEHICLE PRICE*	
<b>\$55,400.00</b>	

**EPA DOT Fuel Economy and Environment**

**Fuel Economy**

**20** MPG  
combined city/hwy

18 city 25 highway

5.0 gallons per 100 miles

**You spend \$2,500 more in fuel costs over 5 years** compared to the average new vehicle.

**Annual fuel cost \$2,000**

**Fuel Economy & Greenhouse Gas Rating** (tailpipe only)

**Smog Rating** (tailpipe only)

Actual results will vary for many reasons, including driving conditions and how you drive and maintain your vehicle. The average new vehicle gets 27 MPG and costs \$2,500 to fuel over 5 years. Cost estimates are based on 15,000 miles per year at \$2.70 per gallon. MPG is miles per gallon equivalent. Vehicle emissions are a significant cause of climate change and smog.

**fuel economy.gov**  
Calculate personalized estimates and compare vehicles

**GOVERNMENT 5-STAR SAFETY RATINGS**

This vehicle has not been rated by the government for overall vehicle score, frontal crash, side crash or rollover risk.

Source: National Highway Traffic Safety Administration (NHTSA)  
[www.safercar.gov](http://www.safercar.gov) or 1-888-327-4236

**PARTS CONTENT INFORMATION**

FOR VEHICLES IN THIS CARLINE:  
U.S./CANADIAN PARTS CONTENT: 52%  
MAJOR SOURCES OF FOREIGN PARTS CONTENT: MEXICO 21%

NOTE: PARTS CONTENT DOES NOT INCLUDE FINAL ASSEMBLY, DISTRIBUTION, OR OTHER NON-PARTS COSTS.

FOR THIS VEHICLE:  
FINAL ASSEMBLY POINT:  
SPRING HILL, TN U.S.A.  
COUNTRY OF ORIGIN:  
ENGINE: UNITED STATES  
TRANSMISSION: UNITED STATES

ORDER NO. 4000402 SALES CODE E  
SALES MODEL CODE 04000  
DEALER NO. 0700  
FINAL ASSEMBLY  
SPRING HILL, TN U.S.A.  
VIN 1GYKPCRB0LZ121014  
DEALER TO WHOM DELIVERED  
BETHLESEM CADILLAC  
6201 LAGRANGE RD  
HODGKINS, IL 60625-4140

**HL**  
1GA0727776

## 102 Monroney Label

## 42 SEATS AND RESTRAINTS

### Head Restraints

#### Front Seats


#### Warning

With head restraints that are not installed and adjusted properly, there is a greater chance that occupants will suffer a neck/spinal injury in a crash. Do not drive until the head restraints for all occupants are installed and adjusted properly.

The vehicle's front seats have adjustable head restraints in the outboard seating positions.



Adjust the head restraint so that the top of the restraint is at the same height as the top of the occupant's head. This position reduces the chance of a neck injury in a crash. The height of the head restraint can be adjusted.



To raise or lower the head restraint, press the button located on the side of the head restraint, and pull up or push the head restraint down, and release the button. Pull and push on the head restraint after the button is released to make sure that it is locked in place.

The front seat outboard head restraints are not removable.

## 103 Driver Head Restraint Use and Adjustment Information from Vehicle Owner's Manual

## Rear Seats

### Second Row Seats

The vehicle's second row seats have adjustable head restraints in the outboard seating positions.

The height of the head restraint can be adjusted. Pull the head restraint up to raise it. Try to move the head restraint to make sure that it is locked in place.



To lower the head restraint, press the button, located on the top of the seatback, and push the head restraint

down. Try to move the head restraint after the button is released to make sure that it is locked in place.

Always adjust the head restraint so that the top of the restraint is at the same height as the top of the occupant's head.

The second row outboard head restraints are not removable.

### Third Row Seats

The vehicle's third row seats have head restraints in the outboard seating positions that cannot be adjusted up or down.

The third row outboard head restraints are not removable.

The third row outboard head restraints are designed to be folded.

The head restraint can be folded to allow for better visibility when the rear seat is unoccupied.

When folding the seatback down, the head restraint will automatically fold out of the way as the seat is folded down.

Return the lowered head restraint to the upright position until it locks into place. Push and pull on the head restraint to make sure it is locked.

When an occupant is in the seat, always return the head restraint to the upright position. Pull the head restraint up and push it rearward until it locks into place. Push and pull on the head restraint to make sure that it is locked.

**104** Left Rear Passenger Head Restraint Use and Adjustment Information from Vehicle Owner's Manual

**APPENDIX B**  
**VEHICLE AND DUMMY RESPONSE DATA PLOTS**



## TABLE OF DATA PLOTS

### Driver & Passenger Dummy Instrumentation Plots

No.	Description	Page
1	Driver Head Acceleration (X) Primary vs. Time	B-5
2	Driver Head Acceleration (Y) Primary vs. Time	B-5
3	Driver Head Acceleration (Z) Primary vs. Time	B-5
4	Driver Head Resultant Acceleration Primary vs. Time	B-5
5	Driver Upper Thorax Rib Deflection (Y) vs. Time	B-6
6	Driver Middle Thorax Rib Deflection (Y) vs. Time	B-6
7	Driver Lower Thorax Rib Deflection (Y) vs. Time	B-6
8	Driver Thorax Rib Deflection Maximum vs. Time	B-6
9	Driver Anterior Abdominal Force (Y) vs. Time	B-7
10	Driver Middle Abdominal Force (Y) vs. Time	B-7
11	Driver Posterior Abdominal Force (Y) vs. Time	B-7
12	Driver Total Abdominal Force (Y) vs. Time	B-7
13	Driver Pubic Symphysis Force (Y) vs. Time	B-8
14	Passenger Head Acceleration (X) Primary vs. Time	B-9
15	Passenger Head Acceleration (Y) Primary vs. Time	B-9
16	Passenger Head Acceleration (Z) Primary vs. Time	B-9
17	Passenger Head Resultant Acceleration Primary vs. Time	B-9
18	Passenger Lower Spine T12 Acceleration (X) vs. Time	B-10
19	Passenger Lower Spine T12 Acceleration (Y) vs. Time	B-10
20	Passenger Lower Spine T12 Acceleration (Z) vs. Time	B-10
21	Passenger Lower Spine T12 Resultant Acceleration vs. Time	B-10
22	Passenger Iliac Force on Impact Side (Y) vs. Time	B-11
23	Passenger Acetabulum Force on Impact Side (Y) vs. Time	B-11
24	Passenger Total Pelvic Force on Impact Side (Y) vs. Time	B-11

The following additional data can be obtained from the Research and Development section of the NHTSA website ([www.nhtsa.gov](http://www.nhtsa.gov))

### **Additional Driver & Passenger Dummy Instrumentation Data**

Driver Lower Spine T12 Acceleration (X)  
Driver Lower Spine T12 Acceleration (Y)  
Driver Lower Spine T12 Acceleration (Z)  
Passenger Upper Thorax Rib Deflection (Y)  
Passenger Middle Thorax Rib Deflection (Y)  
Passenger Lower Thorax Rib Deflection (Y)  
Passenger Upper Abdomen Rib Deflection (Y)  
Passenger Lower Abdomen Rib Deflection (Y)  
Driver Head Acceleration Redundant (X)  
Driver Head Acceleration Redundant (Y)  
Driver Head Acceleration Redundant (Z)  
Passenger Head Acceleration Redundant (X)  
Passenger Head Acceleration Redundant (Y)  
Passenger Head Acceleration Redundant (Z)  
Passenger Head Angular Velocity (X)  
Passenger Head Angular Velocity (Y)  
Passenger Head Angular Velocity (Z)

### **Vehicle Instrumentation Data**

Vehicle Center of Gravity Acceleration (X)  
Vehicle Center of Gravity Acceleration (Y)  
Vehicle Center of Gravity Acceleration (Z)  
Right Side Sill at Front Seat Acceleration (X)  
Right Side Sill at Front Seat Acceleration (Y)  
Right Side Sill at Front Seat Acceleration (Z)  
Right Side Sill at Rear Seat Acceleration (X)  
Right Side Sill at Rear Seat Acceleration (Y)  
Right Side Sill at Rear Seat Acceleration (Z)  
Left Side Sill at Front Seat Acceleration (Y)  
Left Side Sill at Rear Seat Acceleration (Y)  
Lower A-Post Acceleration (Y)  
Middle A-Post Acceleration (Y)  
Lower B-Post Acceleration (Y)  
Middle B-Post Acceleration (Y)  
Front Seat Track Acceleration (Y)  
Rear Seat Structure Acceleration (Y)  
Right Rear Occupant Compartment Acceleration (Y)  
Engine Block (X)  
Engine Block (Y)  
Rear Floorpan Above Axle Acceleration (X)  
Rear Floorpan Above Axle Acceleration (Y)  
Rear Floorpan Above Axle Acceleration (Z)

### **MDB Instrumentation Data**

MDB Center of Gravity Acceleration (X)  
MDB Center of Gravity Acceleration (Y)  
MDB Center of Gravity Acceleration (Z)  
MDB Rear Acceleration (X)  
MDB Rear Acceleration (Y)  
Left MDB Contact Switch  
Right MDB Contact Switch



# NHTSA


Test Lab: CTF

Test Number: 191204 (M20200109)

Test Date: 12/04/2019

Position #1 ES-2 Dummy with Rib Extension (F030)

Position #4 SID IIs Dummy (305)

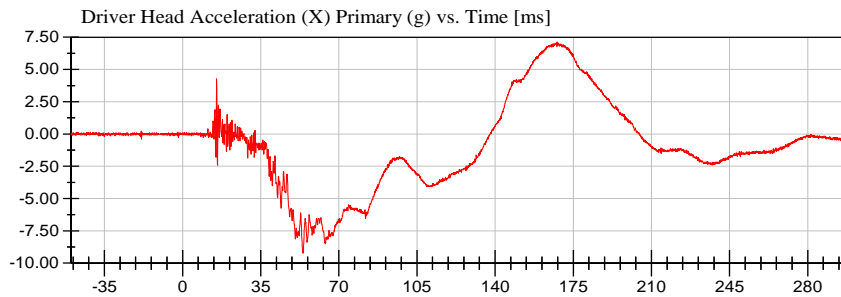


<Max>

7.11 g at 167.52 ms

<Min>

-9.24 g at 53.92 ms

CFC\_1000

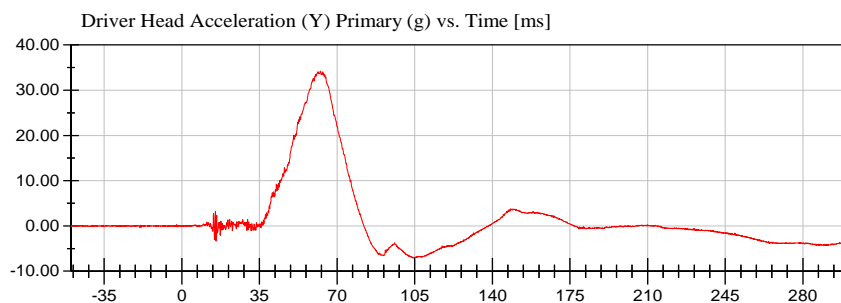


<Max>

34.25 g at 62.48 ms

<Min>

-7.08 g at 104.00 ms

CFC\_1000

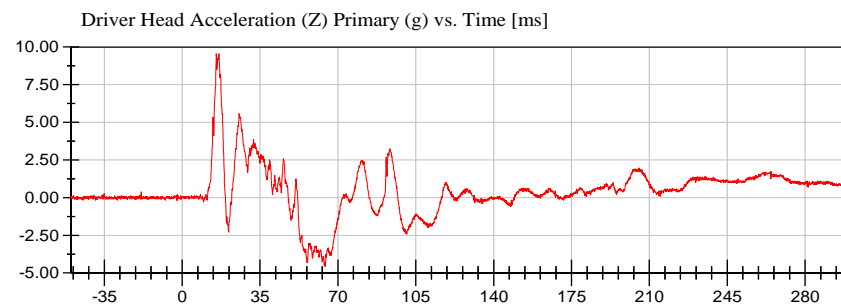


<Max>

9.55 g at 15.36 ms

<Min>

-4.56 g at 64.24 ms

CFC\_1000

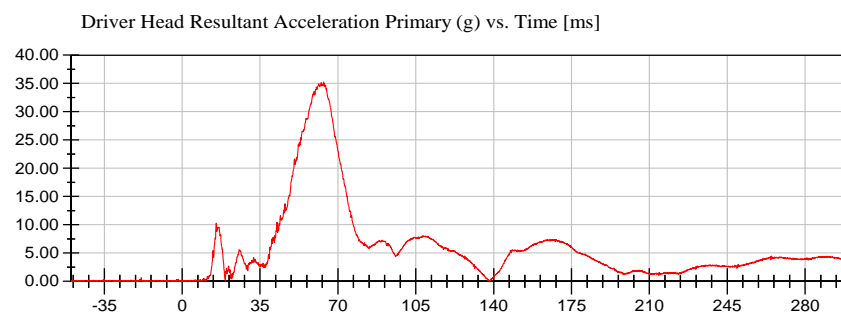

<Max>

35.24 g at 63.52 ms

<Min>

0.03 g at -48.48 ms

CFC\_1000



# NHTSA


Test Lab: CTF

Test Number: 191204 (M20200109)

Test Date: 12/04/2019

Position #1 ES-2 Dummy with Rib Extension (F030)

Position #4 SID IIs Dummy (305)

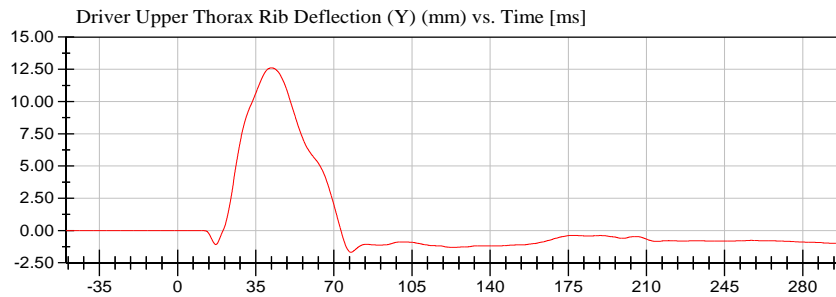


<Max>

12.61 mm at 42.08 ms

<Min>

-1.69 mm at 77.68 ms

CFC\_180

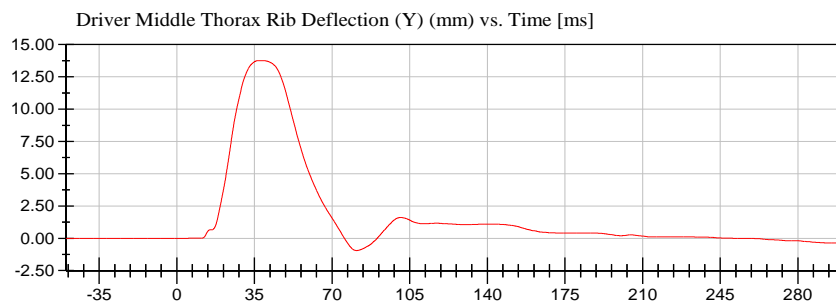


<Max>

13.76 mm at 38.72 ms

<Min>

-0.95 mm at 81.04 ms

CFC\_180

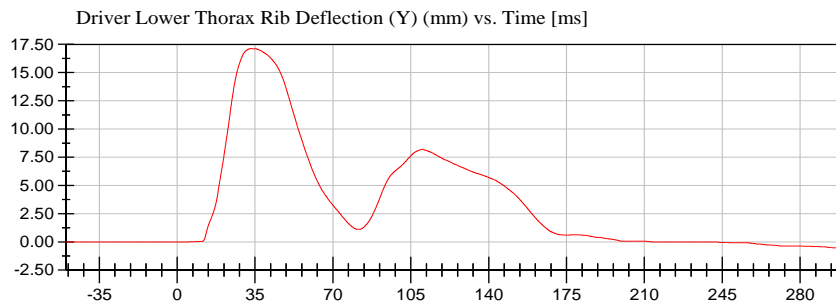


<Max>

17.12 mm at 33.20 ms

<Min>

-0.55 mm at 300.00 ms

CFC\_180

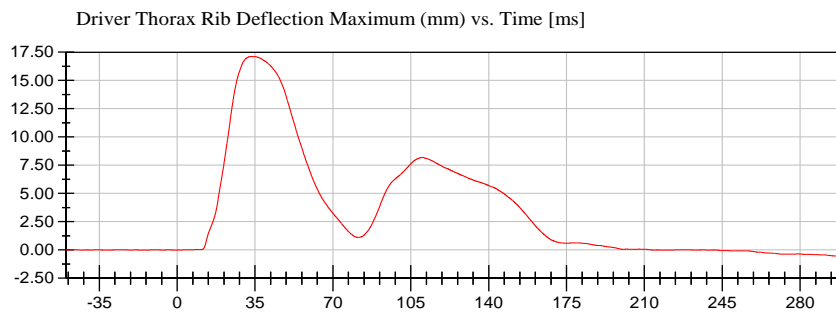

<Max>

17.12 mm at 33.20 ms

<Min>

-0.55 mm at 300.00 ms

CFC\_180



# NHTSA

Test Lab: CTF


Test Number: 191204 (M20200109)

Test Date: 12/04/2019

Position #1 ES-2 Dummy with Rib Extension (F030)

Position #4 SID IIs Dummy (305)

Driver Anterior Abdominal Force (Y) (N) vs. Time [ms]

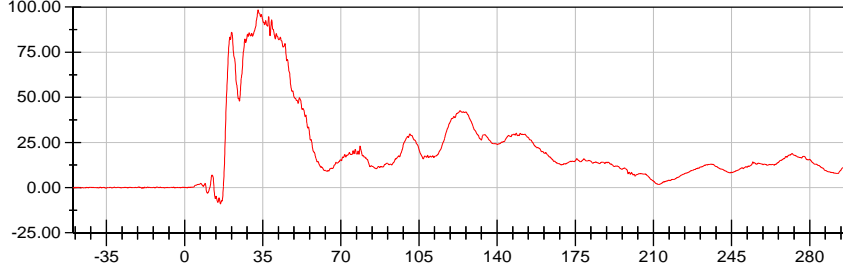

<Max>


98.44 N at 32.96 ms

<Min>

-8.95 N at 16.08 ms

CFC\_600

Driver Middle Abdominal Force (Y) (N) vs. Time [ms]

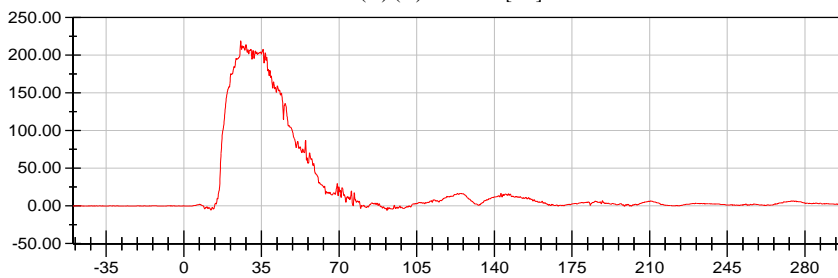

<Max>


219.19 N at 25.68 ms

<Min>

-5.94 N at 91.60 ms

CFC\_600

Driver Posterior Abdominal Force (Y) (N) vs. Time [ms]

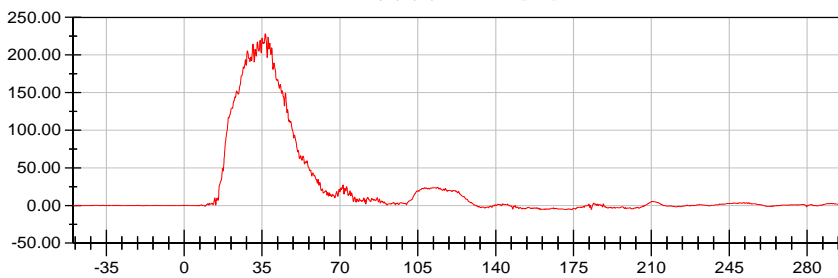

<Max>


228.30 N at 36.48 ms

<Min>

-5.67 N at 174.16 ms

CFC\_600

Driver Total Abdominal Force (Y) (N) vs. Time [ms]

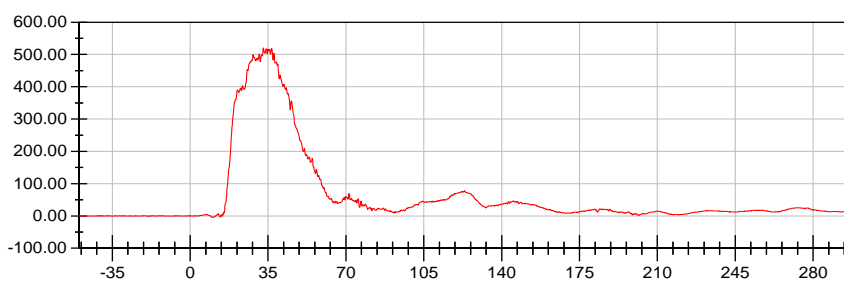

<Max>

519.89 N at 32.96 ms

<Min>

-4.58 N at 9.92 ms

CFC\_600





**NHTSA**


Test Lab: CTF

Test Number: 191204 (M20200109)

Test Date: 12/04/2019

Position #1 ES-2 Dummy with Rib Extension (F030)

Position #4 SID IIs Dummy (305)

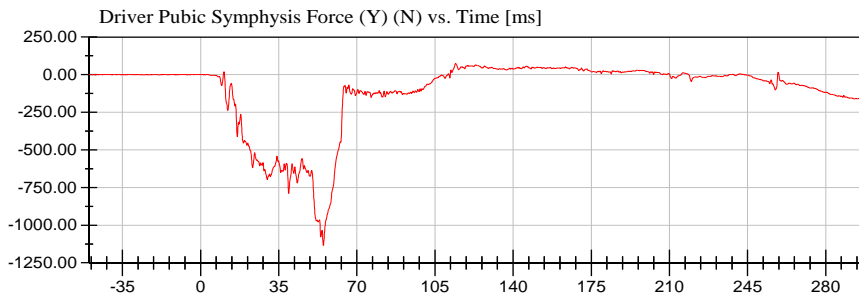

<Max>

74.26 N at 114.24 ms

<Min>

-1,134.44 N at 55.04 ms

CFC\_600



# NHTSA


Test Lab: CTF

Test Number: 191204 (M20200109)

Test Date: 12/04/2019

Position #1 ES-2 Dummy with Rib Extension (F030)

Position #4 SID IIs Dummy (305)

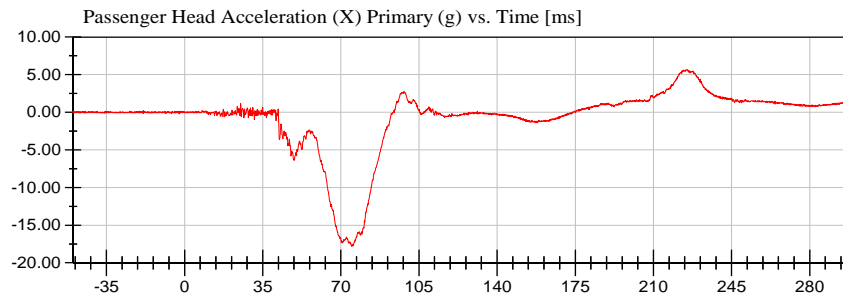


<Max>

5.67 g at 224.72 ms

<Min>

-17.82 g at 74.88 ms

CFC\_1000

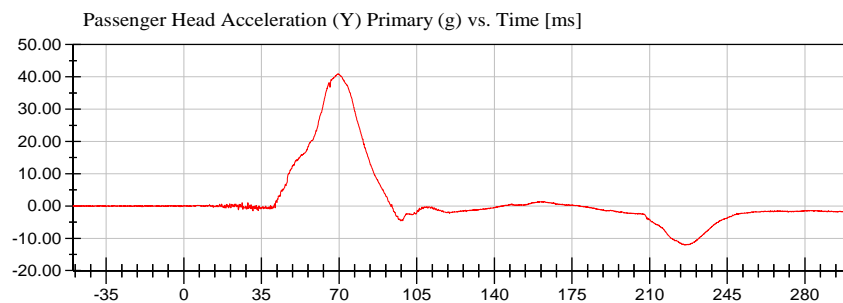


<Max>

40.89 g at 69.36 ms

<Min>

-12.09 g at 225.76 ms

CFC\_1000

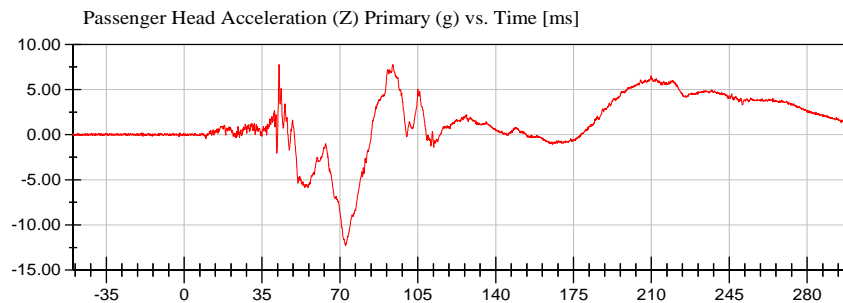


<Max>

7.75 g at 42.64 ms

<Min>

-12.28 g at 72.56 ms

CFC\_1000

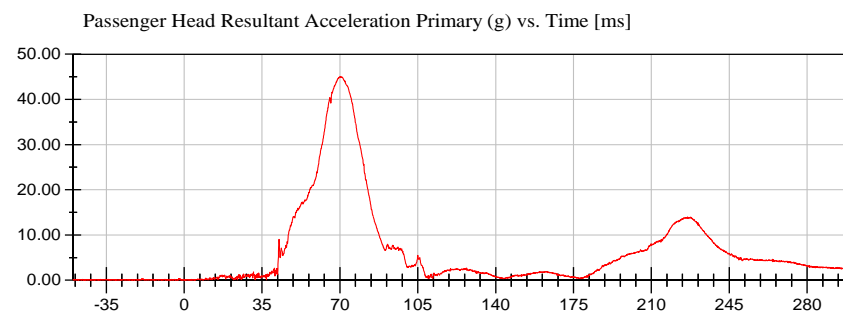

<Max>

45.09 g at 70.24 ms

<Min>

0.03 g at -48.56 ms

CFC\_1000



# NHTSA


Test Lab: CTF

Test Number: 191204 (M20200109)

Test Date: 12/04/2019

Position #1 ES-2 Dummy with Rib Extension (F030)

Position #4 SID IIs Dummy (305)

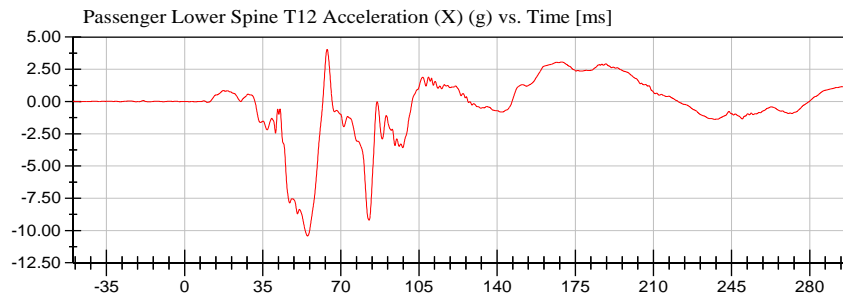


<Max>

4.04 g at 63.84 ms

<Min>

-10.42 g at 55.12 ms

CFC\_180

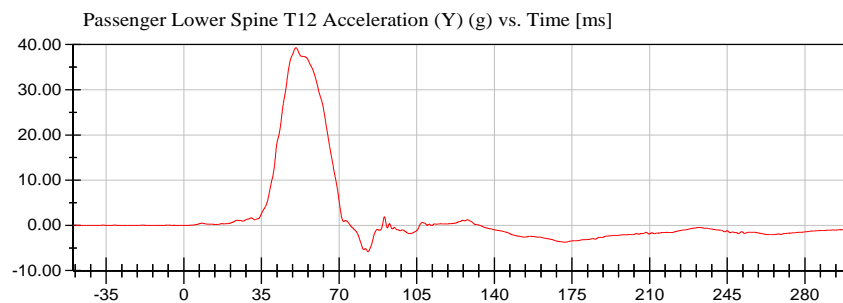


<Max>

39.30 g at 50.56 ms

<Min>

-5.80 g at 83.04 ms

CFC\_180

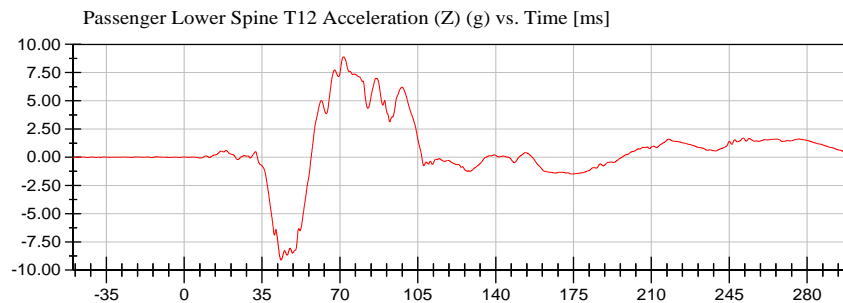


<Max>

8.89 g at 71.68 ms

<Min>

-9.10 g at 43.52 ms

CFC\_180

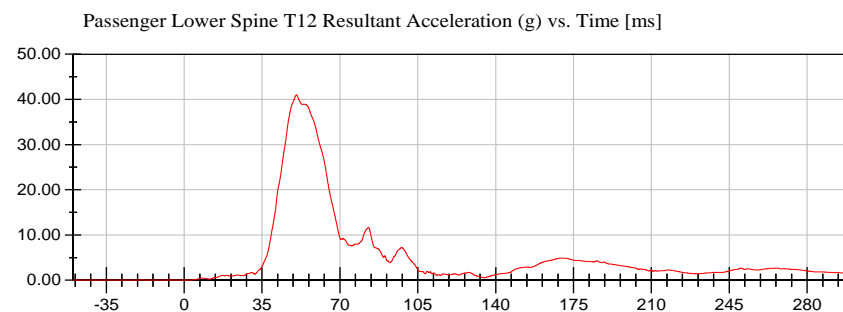

<Max>

41.01 g at 50.48 ms

<Min>

0.00 g at -29.68 ms

CFC\_180





# NHTSA


Test Lab: CTF

Test Number: 191204 (M20200109)

Test Date: 12/04/2019

Position #1 ES-2 Dummy with Rib Extension (F030)

Position #4 SID IIs Dummy (305)

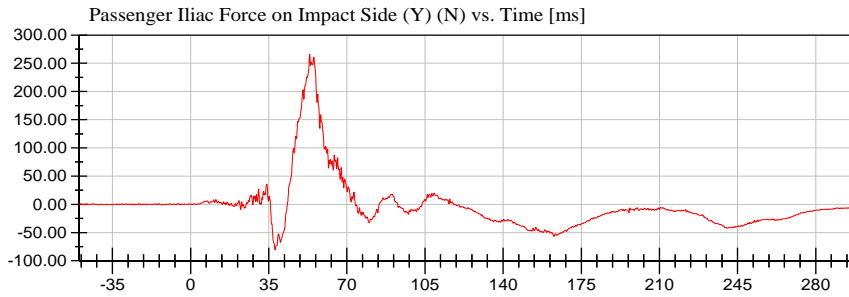


<Max>

266.00 N at 53.36 ms

<Min>

-80.33 N at 37.84 ms

CFC\_600

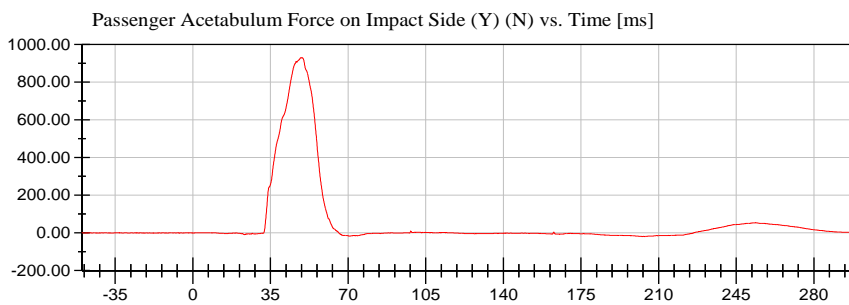


<Max>

929.95 N at 49.28 ms

<Min>

-19.03 N at 202.64 ms

CFC\_600

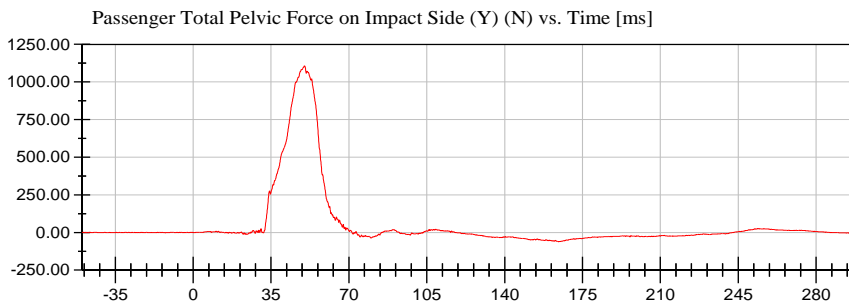

<Max>

1,106.91 N at 50.00 ms

<Min>

-60.94 N at 164.24 ms

CFC\_600

TRC

**APPENDIX C**  
**DUMMY PERFORMANCE CALIBRATION TEST DATA**

## TABLE OF CALIBRATION MEASUREMENTS AND PLOTS

### ES-2re (Driver) Dummy

#### Description

**Table 1.** External Measurements

**Table 2.** Head Drop Test

Head (X) Acceleration (G's) vs. Time (ms)  
Head (Y) Acceleration (G's) vs. Time (ms)  
Head (Z) Acceleration (G's) vs. Time (ms)  
Resultant Head Acceleration (G's) vs. Time (ms)

**Table 3** Neck Pendulum Test

Pendulum Velocity (m/s) vs. Time (ms)  
Flexion Angle (°) vs. Time (ms)  
Potentiometer A (°) vs. Time (ms)  
Potentiometer B (°) vs. Time (ms)  
Potentiometer C (°) vs. Time (ms)

**Table 4.** Shoulder Impact Test

Impactor Acceleration (G's) vs. Time (ms)

**Table 5.** Thorax – Upper Rib Drop Test

Upper Rib Displacement @ 459 mm Drop Height (mm) vs. Time (ms)  
Upper Rib Displacement @ 815 mm Drop Height (mm) vs. Time (ms)

**Table 6.** Thorax – Middle Rib Drop Test

Middle Rib Displacement @ 459 mm Drop Height (mm) vs. Time (ms)  
Middle Rib Displacement @ 815 mm Drop Height (mm) vs. Time (ms)

**Table 7.** Thorax – Lower Rib Drop Test

Lower Rib Displacement @ 459 mm Drop Height (mm) vs. Time (ms)  
Lower Rib Displacement @ 815 mm Drop Height (mm) vs. Time (ms)

**Table 8.** Thorax – Full Body Impact Test

Pendulum Acceleration (G's) vs. Time (ms)  
Impactor Force (kN) vs. Time (ms)  
Upper Rib Displacement (mm) vs. Time (ms)  
Middle Rib Displacement (mm) vs. Time (ms)  
Lower Rib Displacement (mm) vs. Time (ms)

**Table 9.** Abdomen Impact Test

Impactor Force (kN) vs. Time (ms)  
Front Abdomen Force (kN) vs. Time (ms)  
Middle Abdomen Force (kN) vs. Time (ms)  
Rear Abdomen Force (kN) vs. Time (ms)  
Total Abdomen Force (kN) vs. Time (ms)

**Table 10.** Lumbar Spine Flexion Test

Pendulum Velocity (m/s) vs. Time (ms)  
Spine Flexion Angle (°) vs. Time (ms)  
Potentiometer A (°) vs. Time (ms)  
Potentiometer B (°) vs. Time (ms)  
Potentiometer C (°) vs. Time (ms)

**Table 11.** Pelvis Impact Test

Pendulum Acceleration (G's) vs. Time (ms)  
Impactor Force (kN) vs. Time (ms)  
Pubic Symphysis (Y) Force (kN) vs. Time (ms)



## TABLE OF CALIBRATION MEASUREMENTS AND PLOTS

### SID-IIs (Rear Passenger) Dummy

#### Description

**Table 1.** External Measurements

**Table 2.** Head Drop Test

- Head (X) Acceleration (G's) vs. Time (ms)
- Head (Y) Acceleration (G's) vs. Time (ms)
- Head (Z) Acceleration (G's) vs. Time (ms)
- Resultant Head Acceleration (G's) vs. Time (ms)

**Table 3.** Lateral Neck Pendulum Test

- Pendulum Velocity (m/s) vs. Time (ms)
- Flexion Angle (°) vs. Time (ms)
- Moment About Occipital Condyle (Nm) vs. Time (ms)

**Table 4.** Shoulder Impact Test

- Impactor Acceleration (G's) vs. Time (ms)
- Shoulder Displacement (mm) vs. Time (ms)
- Upper Spine Acceleration (G's) vs. Time (ms)

**Table 5.** Thorax (With Arm) Impact Test

- Impactor Acceleration (G's) vs. Time (ms)
- Shoulder Displacement (mm) vs. Time (ms)
- Upper Rib Displacement (mm) vs. Time (ms)
- Middle Rib Displacement (mm) vs. Time (ms)
- Lower Rib Displacement (mm) vs. Time (ms)
- Upper Spine Acceleration (G's) vs. Time (ms)
- Lower Spine Acceleration (G's) vs. Time (ms)

**Table 6.** Thorax (Without Arm) Impact Test

- Impactor Acceleration (G's) vs. Time (ms)
- Upper Rib Displacement (mm) vs. Time (ms)
- Middle Rib Displacement (mm) vs. Time (ms)
- Lower Rib Displacement (mm) vs. Time (ms)
- Upper Spine Acceleration (G's) vs. Time (ms)
- Lower Spine Acceleration (G's) vs. Time (ms)

**Table 7.** Abdomen Impact Test

- Impactor Acceleration (G's) vs. Time (ms)
- Upper Abdominal Rib Displacement (mm) vs. Time (ms)
- Lower Abdominal Rib Displacement (mm) vs. Time (ms)
- Lower Spine Acceleration (G's) vs. Time (ms)

**Table 8.** Pelvis Plug Quasi-Static Test (Optional\*)

**Table 9.** Pelvis Acetabulum Impact Test

- Impactor Acceleration (G's) vs. Time (ms)
- Pelvis (Y) Acceleration (G's) vs. Time (ms)
- Acetabulum Force (N) vs. Time (ms)

**Table 10.** Pelvis Iliac Impact Test

- Impactor Acceleration (G's) vs. Time (ms)
- Pelvis (Y) Acceleration (G's) vs. Time (ms)
- Iliac Force (N) vs. Time (ms)

**Pre-Test Calibration Sheets**  
**Driver S/N F030**

**Transportation Research Center Inc.**  
**572U ES-2re Dummy**  
**External Dimensions**  
**Serial No. F030 Calibration No. 68**

Symbol	Description	Specification	Results	Pass
		mm	mm	
1	Sitting Height	900.0 - 918.0	909	Yes
2	Seat to Shoulder Joint	558.0 - 572.0	560	Yes
3	Seat to Lower Face of Thoracic Spine Box	346.0 - 356.0	347	Yes
4	Seat to Hip Joint (center of bolt)	97.0 - 103.0	98	Yes
5	Sole to Seat, Sitting	433.0 - 451.0	444	Yes
6	Head Width	152.0 - 158.0	155	Yes
7	Shoulder/Arm Width	461.0 - 479.0	475	Yes
8	Thorax Width	322.0 - 332.0	328	Yes
9	Abdomen Width	273.0 - 287.0	280	Yes
10	Pelvis Lap Width	359.0 - 373.0	367	Yes
11	Head Depth	196.0 - 206.0	201	Yes
12	Thorax Depth	262.0 - 272.0	262	Yes
13	Abdomen Depth	194.0 - 204.0	199	Yes
14	Pelvis Depth	235.0 - 245.0	242	Yes
15	Back of Buttocks to Hip Joint (center of bolt)	150.0 - 160.0	156	Yes
16	Back of Buttocks to Front of Knee	597.0 - 615.0	605	Yes

Baseline 10/07/05





## Transportation Research Center Inc.

Left Lateral Head Drop

ES-2re Serial No. F030 Certification No. 68-1

Test Date: 11/4/2019

Test Parameter	Specification	Test Results	Pass
Temperature	20.6 - 22.2 °C	21.7 °C	Yes
Relative Humidity	10 - 70 %	36 %	Yes
Peak Resultant Acceleration	125 - 155 g	137.2 g	Yes
Peak Longitudinal Acceleration	(-15) - 15 g	8.7 g	Yes
Is Resultant Acceleration Curve Unimodal within 15% of Main Pulse?	< 15 %	4.33 %	Yes

**Test meets specifications.**

**Condition: Used**

**Comments:**

**Head Skin S/N: DP6812**


Specification Source: CFR49 Part 572 Subpart U  
with Polarity in accordance with J211

11.04.2019 08:01:29 327



## Transportation Research Center Inc.


Left Lateral Head Drop  
ES-2re Serial No. F030 Certification No. 68-1  
Test Date: 11/4/2019

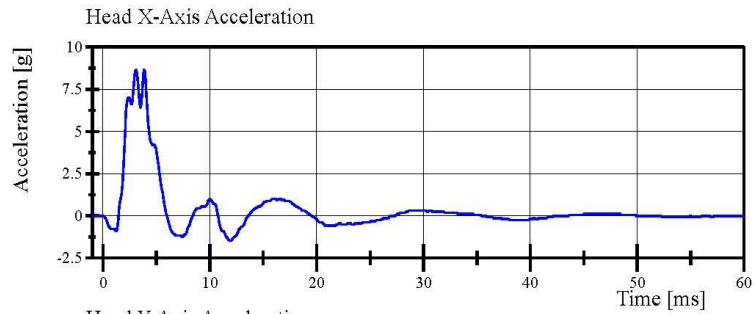

Filter Class: CFC\_1000

Max: 8.7 g at 3.1 ms


Min: -1.5 g at 11.8 ms

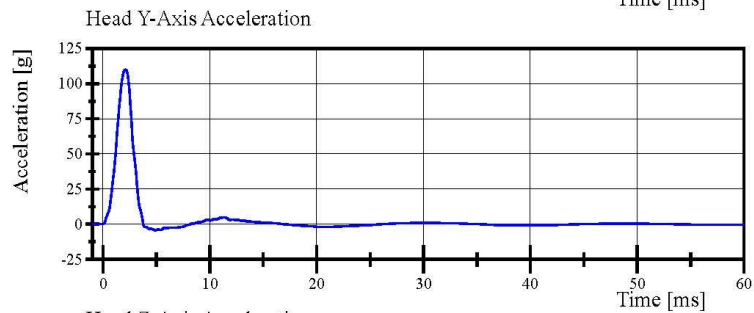

Filter Class: CFC\_1000

Max: 110.1 g at 2.1 ms


Min: -4.3 g at 4.9 ms

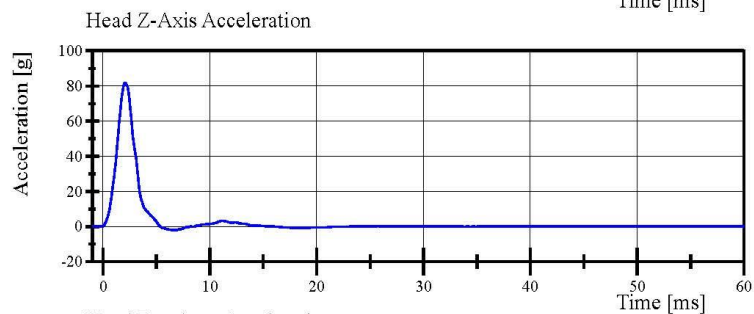

Filter Class: CFC\_1000

Max: 81.8 g at 2.1 ms

Min: -1.9 g at 6.6 ms

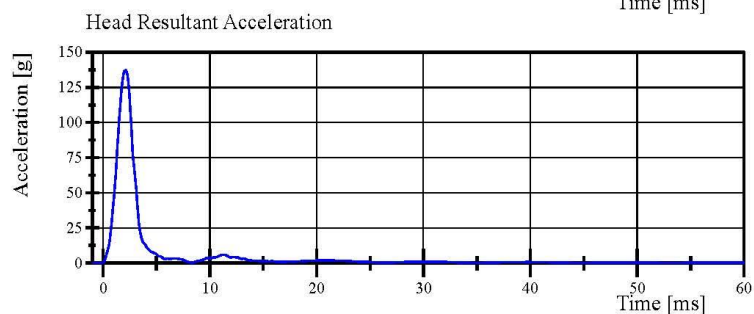

Filter Class: CFC\_1000

Max: 137.2 g at 2.1 ms

Min: 0.0 g at -1.0 ms

Specification Source: CFR49 Part 572 Subpart U  
with Polarity in accordance with J211

11.04.2019 08:02:12 327



## Transportation Research Center Inc.

Left Lateral Neck  
ES-2re Serial No. F030 Certification No. 68-1  
Test Date: 11/4/2019

Test Parameter	Specification	Test Results	Pass
Temperature	20.6 - 22.2 °C	21.8 °C	Yes
Relative Humidity	10 - 70 %	39 %	Yes
Pendulum Integrated Velocity Change within Corridor	Yes	Yes	Yes
Pendulum Velocity	(-3.3) - (-3.5) m/s	-3.36 m/s	Yes
Maximum Headform Flexion			
Peak	(-49) - (-59) deg	-51.3 deg	Yes
Time of Peak	54 - 66 ms	56.6 ms	Yes
Headform Flexion Decay			
- Peak to Zero	53 - 88 ms	58.1 ms	Yes

**Test meets specifications.**

**Condition:** Used

**Comments:**

**Neck S/N: 05053**

Specification Source: CFR49 Part 572 Subpart U  
with Polarity in accordance with J211

11.04.2019 11:41:52 1468







## Transportation Research Center Inc.

Left Lateral Neck

ES-2re Serial No. F030 Certification No. 68-1

Test Date: 11/4/2019

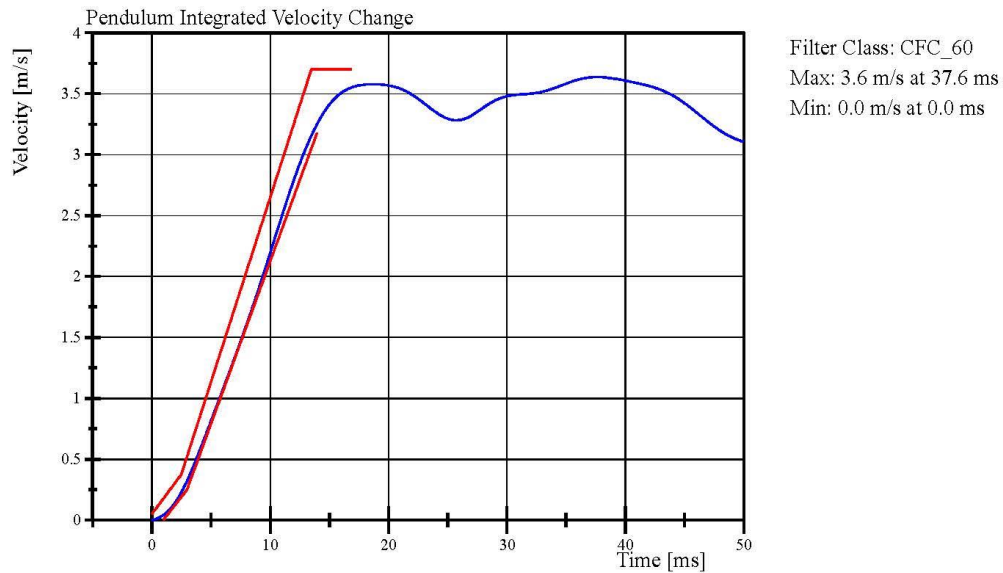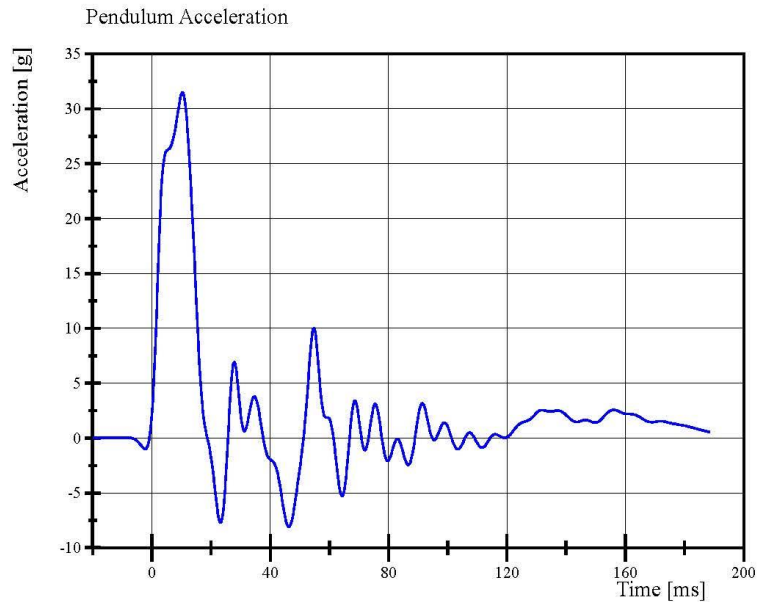

Specification Source: CFR49 Part 572 Subpart U  
with Polarity in accordance with J211

11.04.2019 11:43:59 1468







## Transportation Research Center Inc.

Left Lateral Neck

ES-2re Serial No. F030 Certification No. 68-1

Test Date: 11/4/2019

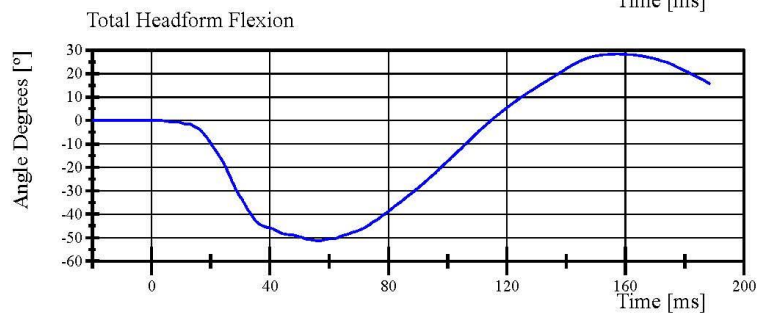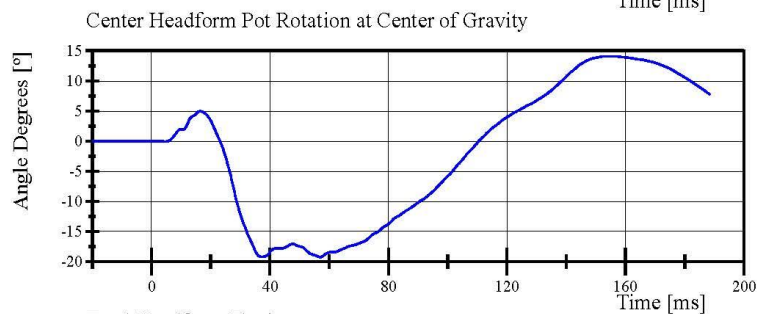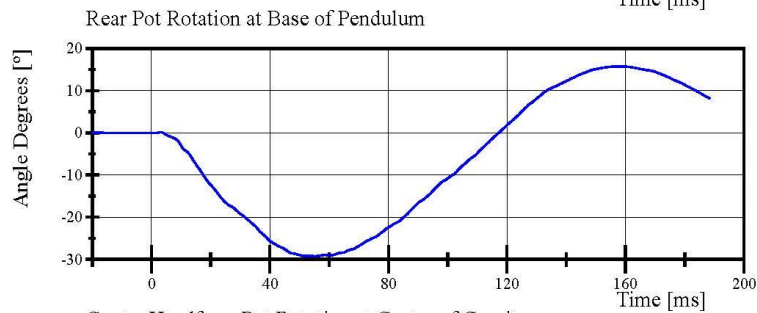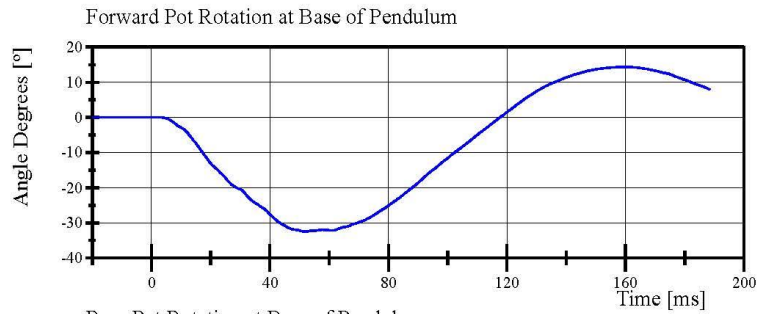

Specification Source: CFR49 Part 572 Subpart U  
with Polarity in accordance with J211

11.04.2019 11:43:59 1468



## Transportation Research Center Inc.

Left Lateral Shoulder  
ES-2re Serial No. F030 Certification No. 68-1  
Test Date: 11/4/2019

Test Parameter	Specification	Test Results	Pass
Temperature	20.6 - 22.2 °C	21.9 °C	Yes
Relative Humidity	10 - 70 %	47 %	Yes
Test Probe Velocity	4.2 - 4.4 m/s	4.29 m/s	Yes
Test Probe Acceleration	(-7.5) - (-10.5) g	-9.60 g	Yes

**Test meets specifications.**

**Condition: Used**

**Comments:**

**Arm S/N: 175-3501-07014**


Specification Source: CFR49 Part 572 Subpart U  
with Polarity in accordance with J211

11.04.2019 13:22:40 547



## Transportation Research Center Inc.

Left Lateral Shoulder  
ES-2re Serial No. F030 Certification No. 68-1  
Test Date: 11/4/2019

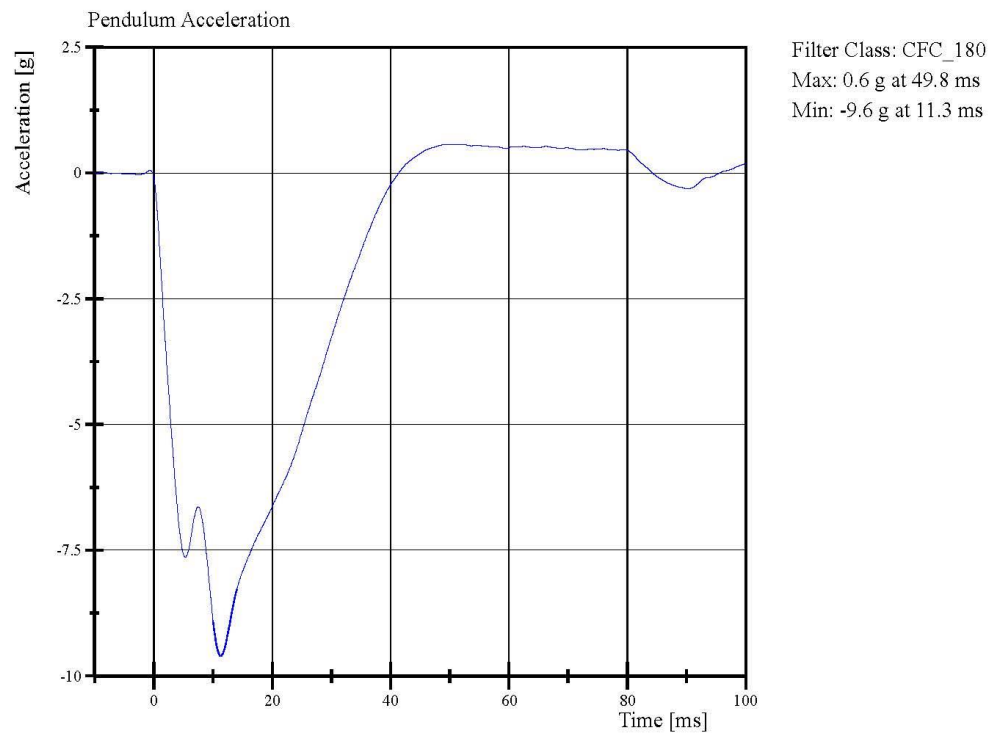

Specification Source: CFR49 Part 572 Subpart U  
with Polarity in accordance with J211

11.04.2019 13:23:46 547





## Transportation Research Center Inc.

3.0 m/s Upper Full Rib Module  
ES-2re Serial No. F030 Certification No. 68-1  
Test Date: 11/4/2019

Test Parameter	Specification	Test Results	Pass
Temperature	20.6 - 22.2 °C	21.6 °C	Yes
Relative Humidity	10 - 70 %	35 %	Yes
3.0 m/s Test Rib Displacement (454 mm to 464 mm)	36 - 40 mm	37.8 mm	Yes

**Test meets specifications.**

**Condition:** Used

**Comments:**

**Drop Height:** 462mm

**Rib Module:** 175-4008-A


Specification Source: CFR49 Part 572 Subpart U  
with Polarity in accordance with J211

11.04.2019 07:57:25 453



## Transportation Research Center Inc.

3.0 m/s Upper Full Rib Module  
ES-2re Serial No. F030 Certification No. 68-1  
Test Date: 11/4/2019

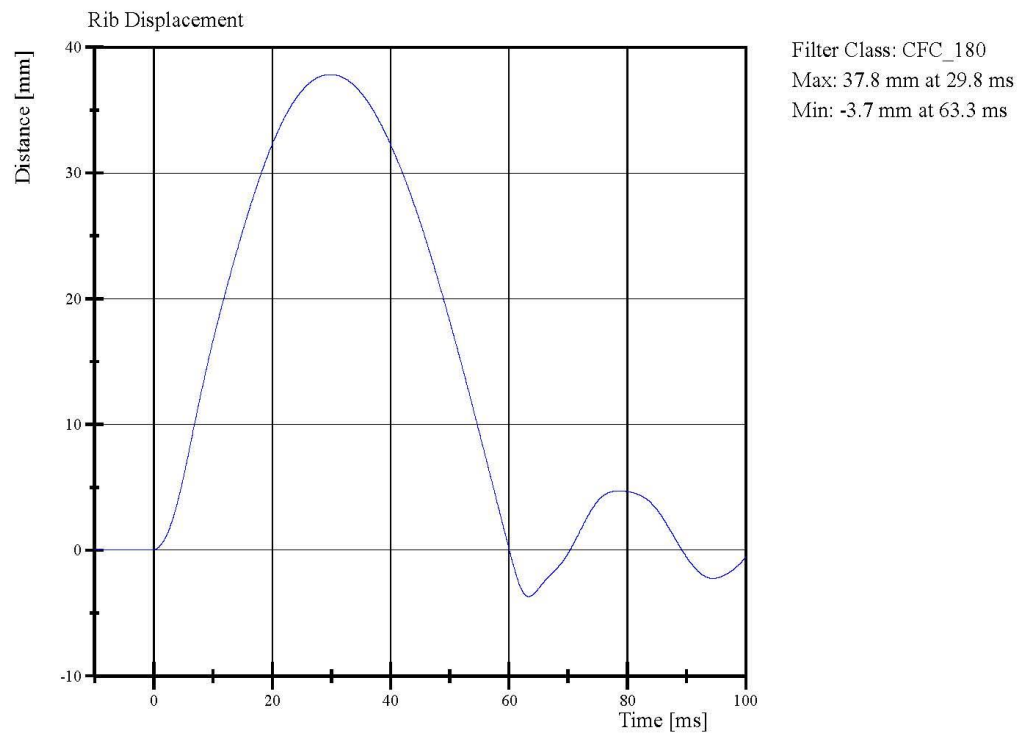

Specification Source: CFR49 Part 572 Subpart U  
with Polarity in accordance with J211

11.04.2019 07:58:36 453



## Transportation Research Center Inc.

4.0 m/s Upper Full Rib Module  
ES-2re Serial No. F030 Certification No. 68-1  
Test Date: 11/4/2019

Test Parameter	Specification	Test Results	Pass
Temperature	20.6 - 22.2 °C	21.5 °C	Yes
Relative Humidity	10 - 70 %	36 %	Yes
4.0 m/s Test Rib Displacement (807 mm to 823 mm)	46 - 51 mm	46.8 mm	Yes

**Test meets specifications.**

**Condition:** Used

**Comments:**

**Drop Height:** 816mm

**Rib Module:** 175-4008-A


Specification Source: CFR49 Part 572 Subpart U  
with Polarity in accordance with J211

11.04.2019 07:51:48 380



## Transportation Research Center Inc.

4.0 m/s Upper Full Rib Module  
ES-2re Serial No. F030 Certification No. 68-1  
Test Date: 11/4/2019

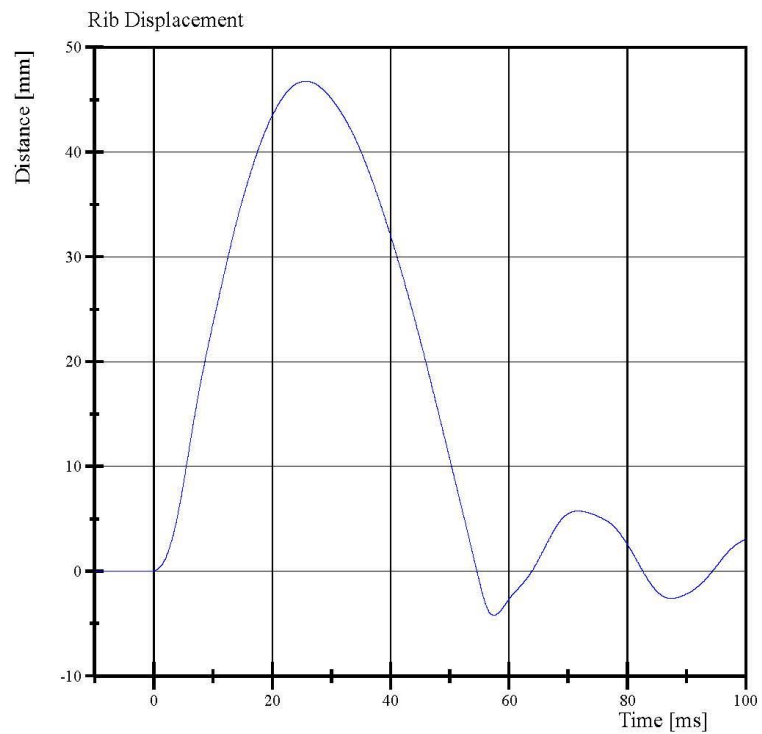

Filter Class: CFC\_180  
Max: 46.8 mm at 25.7 ms  
Min: -4.2 mm at 57.4 ms

Specification Source: CFR49 Part 572 Subpart U  
with Polarity in accordance with J211

11.04.2019 07:52:39 380





## Transportation Research Center Inc.

3.0 m/s Middle Full Rib Module  
ES-2re Serial No. F030 Certification No. 68-1  
Test Date: 11/4/2019

Test Parameter	Specification	Test Results	Pass
Temperature	20.6 - 22.2 °C	21.9 °C	Yes
Relative Humidity	10 - 70 %	41 %	Yes
3.0 m/s Test Rib Displacement (454 mm to 464 mm)	36 - 40 mm	38.0 mm	Yes

**Test meets specifications.**

**Condition:** Used

**Comments:**

**Drop Height:** 462 mm

**Rib Module:** 175-4008-A


Specification Source: CFR49 Part 572 Subpart U  
with Polarity in accordance with J211

11.04.2019 08:21:22 419



## Transportation Research Center Inc.

3.0 m/s Middle Full Rib Module  
ES-2re Serial No. F030 Certification No. 68-1  
Test Date: 11/4/2019

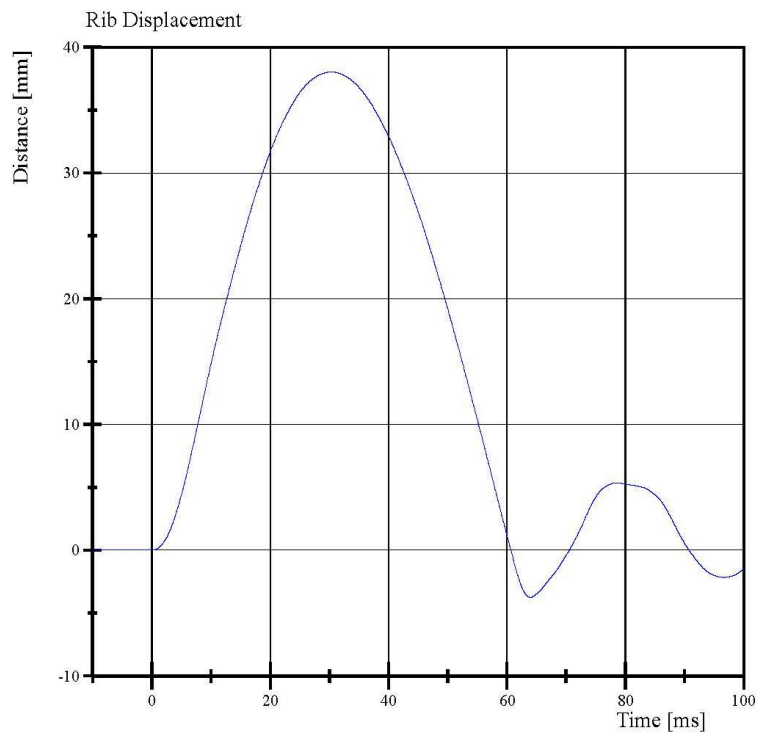

Filter Class: CFC\_180  
Max: 38.0 mm at 30.3 ms  
Min: -3.8 mm at 63.9 ms

Specification Source: CFR49 Part 572 Subpart U  
with Polarity in accordance with J211

11.04.2019 08:21:47 419



## Transportation Research Center Inc.

4.0 m/s Middle Full Rib Module  
ES-2re Serial No. F030 Certification No. 68-1  
Test Date: 11/4/2019

Test Parameter	Specification	Test Results	Pass
Temperature	20.6 - 22.2 °C	21.8 °C	Yes
Relative Humidity	10 - 70 %	38 %	Yes
4.0 m/s Test Rib Displacement (807 mm to 823 mm)	46 - 51 mm	49.4 mm	Yes

**Test meets specifications.**

**Condition:** Used

**Comments:**

**Drop Height:** 816 mm

**Rib Module:** 175-4008-A


Specification Source: CFR49 Part 572 Subpart U  
with Polarity in accordance with J211

11.04.2019 08:13:17 347



## Transportation Research Center Inc.

4.0 m/s Middle Full Rib Module  
ES-2re Serial No. F030 Certification No. 68-1  
Test Date: 11/4/2019

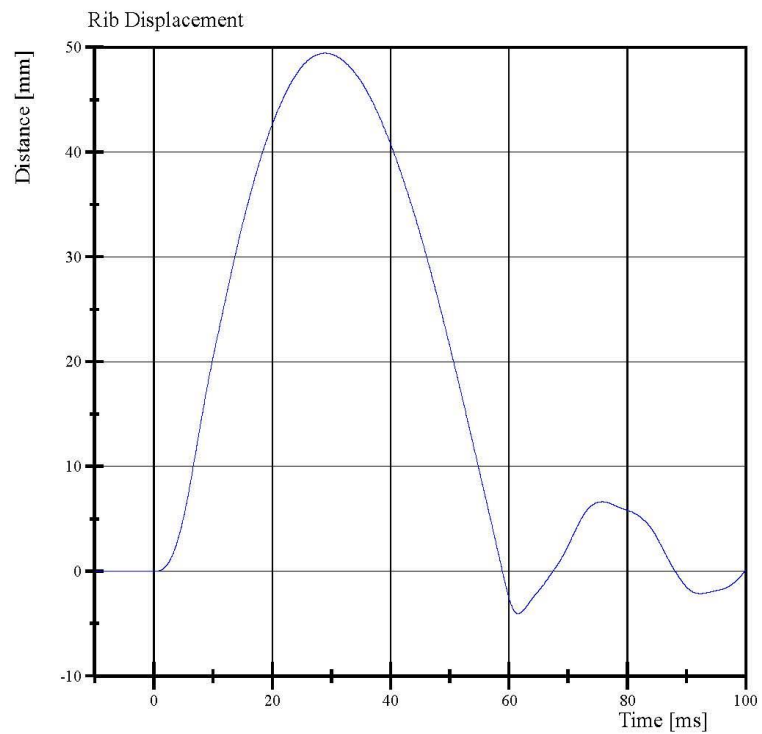

Filter Class: CFC\_180  
Max: 49.4 mm at 29.0 ms  
Min: -4.1 mm at 61.5 ms

Specification Source: CFR49 Part 572 Subpart U  
with Polarity in accordance with J211

11.04.2019 08:14:09 347





## Transportation Research Center Inc.

3.0 m/s Lower Full Rib Module  
ES-2re Serial No. F030 Certification No. 68-1  
Test Date: 11/4/2019

Test Parameter	Specification	Test Results	Pass
Temperature	20.6 - 22.2 °C	21.2 °C	Yes
Relative Humidity	10 - 70 %	42 %	Yes
3.0 m/s Test Rib Displacement (454 mm to 464 mm)	36 - 40 mm	37.4 mm	Yes

**Test meets specifications.**

**Condition:** Used

**Comments:**

**Drop Height:** 462 mm

**Rib Module:** 175-4008-A-06-017


Specification Source: CFR49 Part 572 Subpart U  
with Polarity in accordance with J211

11.04.2019 08:38:59 443



## Transportation Research Center Inc.

3.0 m/s Lower Full Rib Module  
ES-2re Serial No. F030 Certification No. 68-1  
Test Date: 11/4/2019

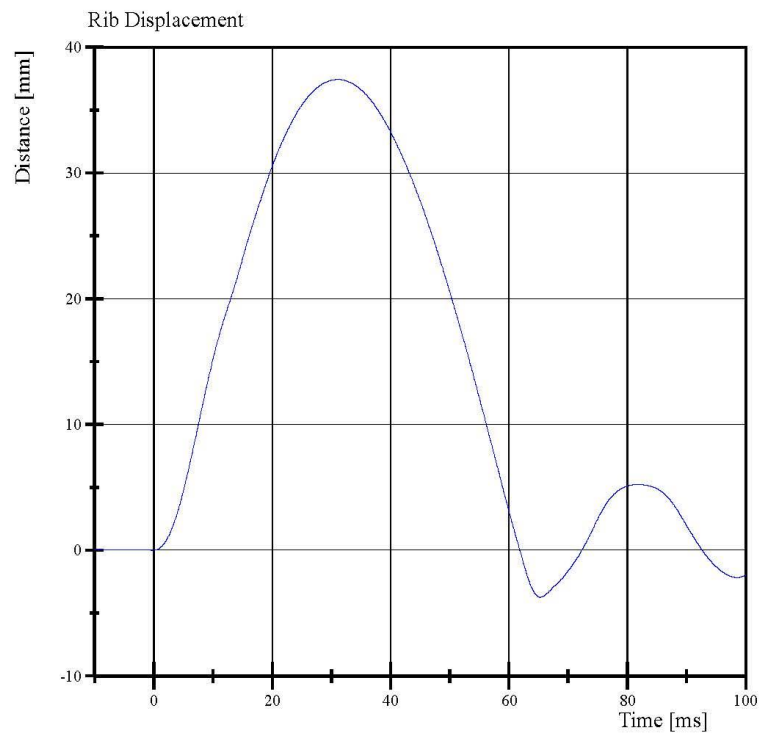

Filter Class: CFC\_180  
Max: 37.4 mm at 31.1 ms  
Min: -3.7 mm at 65.3 ms

Specification Source: CFR49 Part 572 Subpart U  
with Polarity in accordance with J211

11.04.2019 08:39:34 443



## Transportation Research Center Inc.

4.0 m/s Lower Full Rib Module  
ES-2re Serial No. F030 Certification No. 68-1  
Test Date: 11/4/2019

Test Parameter	Specification	Test Results	Pass
Temperature	20.6 - 22.2 °C	20.8 °C	Yes
Relative Humidity	10 - 70 %	40 %	Yes
4.0 m/s Test Rib Displacement (807 mm to 823 mm)	46 - 51 mm	49.0 mm	Yes

**Test meets specifications.**

**Condition:** Used

**Comments:**

**Drop Height:** 816 mm

**Rib Module:** 175-4008-A-06-017


Specification Source: CFR49 Part 572 Subpart U  
with Polarity in accordance with J211

11.04.2019 08:28:41 371



## Transportation Research Center Inc.

4.0 m/s Lower Full Rib Module  
ES-2re Serial No. F030 Certification No. 68-1  
Test Date: 11/4/2019

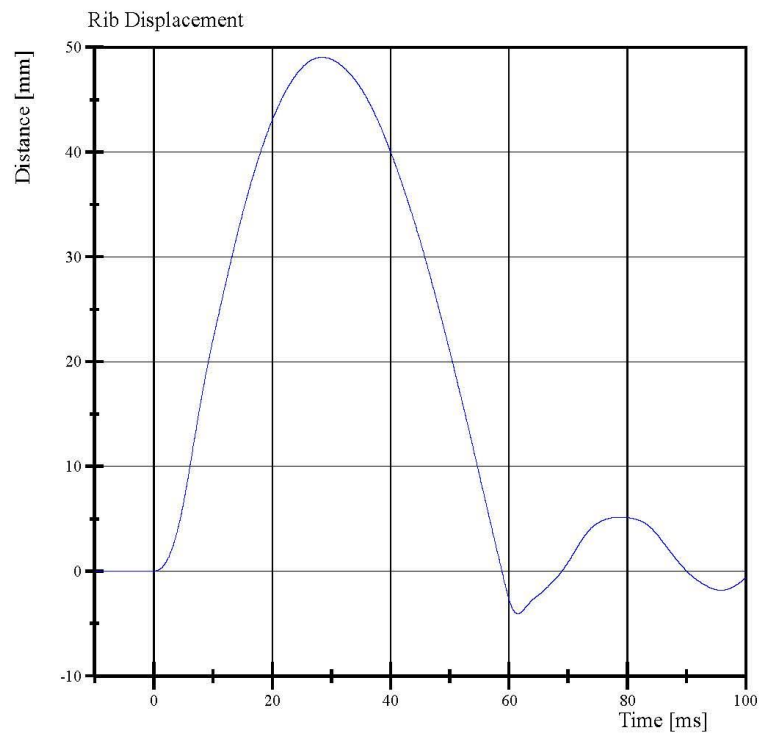

Filter Class: CFC\_180  
Max: 49.0 mm at 28.5 ms  
Min: -4.1 mm at 61.5 ms

Specification Source: CFR49 Part 572 Subpart U  
with Polarity in accordance with J211

11.04.2019 08:29:22 371





## Transportation Research Center Inc.

Left Lower Thorax  
ES-2re Serial No. F030 Certification No. 68-1  
Test Date: 11/4/2019

Test Parameter	Specification	Test Results	Pass
Temperature	20.6 - 22.2 °C	20.8 °C	Yes
Relative Humidity	10 - 70 %	45 %	Yes
Impactor Velocity	5.4 - 5.60 m/s	5.460 m/s	Yes
Peak Impactor Force after 6 ms	(-5,100) - (-6,200) N	-5,796.6 N	Yes
Upper Rib Displacement	34 - 41 mm	38.2 mm	Yes
Center Rib Displacement	37 - 45 mm	40.9 mm	Yes
Lower Rib Displacement	37 - 44 mm	40.9 mm	Yes

**Test meets specifications.**

**Condition:** Used

**Comments:**

**Upper Rib Module S/N: 175-4008-A**

**Upper Rib Foam S/N: 175-4003-EK6973**

**Middle Rib Module S/N: 175-4008-A**

**Middle Rib Foam S/N: 175-4003-EK6970**

**Lower Rib Module S/N: 175-4008-A-06-017**

**Lower Rib Foam S/N: 175-4008-EK6971**


Specification Source: CFR49 Part 572 Subpart U  
with Polarity in accordance with J211

11.04.2019 13:31:04 431



## Transportation Research Center Inc.

Left Lower Thorax  
ES-2re Serial No. F030 Certification No. 68-1  
Test Date: 11/4/2019

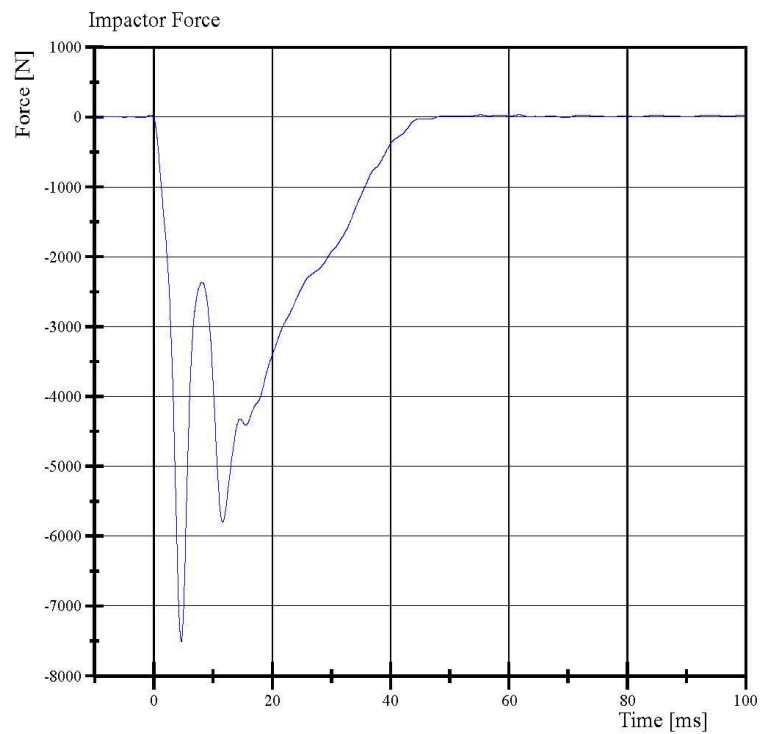

Filter Class: CFC\_180  
Max: 34.9 N at 55.2 ms  
Min: -7,509.0 N at 4.6 ms




Specification Source: CFR49 Part 572 Subpart U  
with Polarity in accordance with J211

11.04.2019 13:33:33 431



## Transportation Research Center Inc.

Left Lower Thorax  
ES-2re Serial No. F030 Certification No. 68-1  
Test Date: 11/4/2019

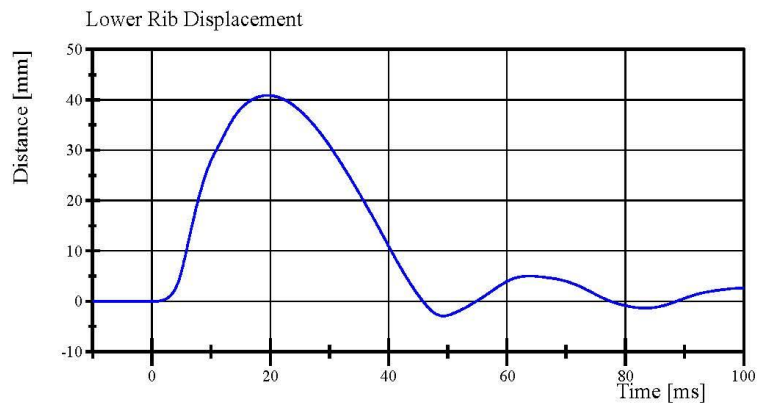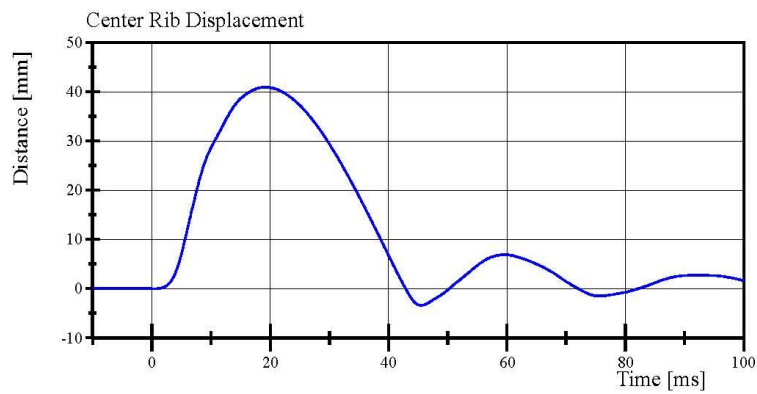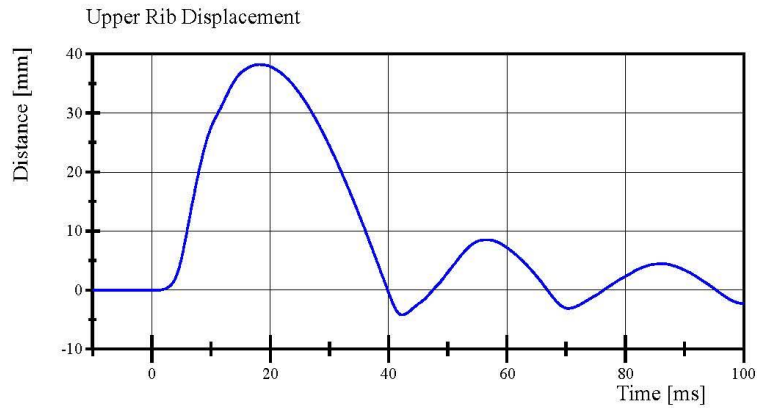

Specification Source: CFR49 Part 572 Subpart U  
with Polarity in accordance with J211

11.04.2019 13:33:33 431



## Transportation Research Center Inc.

Left Lateral Lumbar  
ES-2re Serial No. F030 Certification No. 68-2  
Test Date: 11/4/2019

Test Parameter	Specification	Test Results	Pass
Temperature	20.6 - 22.2 °C	21.5 °C	Yes
Relative Humidity	10 - 70 %	37 %	Yes
Pendulum Integrated Velocity Change within Corridor	Yes	Yes	Yes
Pendulum Velocity	(-5.95) - (-6.15) m/s	-6.108 m/s	Yes
Maximum Headform Flexion			
Peak	(-45) - (-55) deg	-48.8 deg	Yes
Time of Peak	39 - 53 ms	45.3 ms	Yes
Headform Flexion Decay			
- Peak to Zero	37 - 57 ms	37.1 ms	Yes

**Test meets specifications.**

**Condition:** Used

**Comments:**

**Lumbar S/N: 150365**

Specification Source: CFR49 Part 572 Subpart U  
with Polarity in accordance with J211


11.04.2019 12:08:30 639






## Transportation Research Center Inc.

Left Lateral Lumbar  
ES-2re Serial No. F030 Certification No. 68-2  
Test Date: 11/4/2019

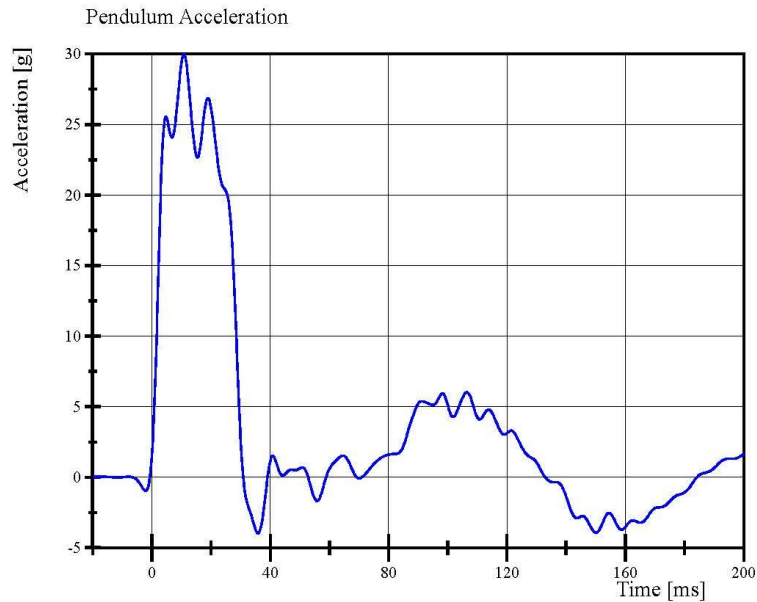

Filter Class: CFC\_60  
Max: 30.0 g at 10.8 ms  
Min: -4.0 g at 35.8 ms

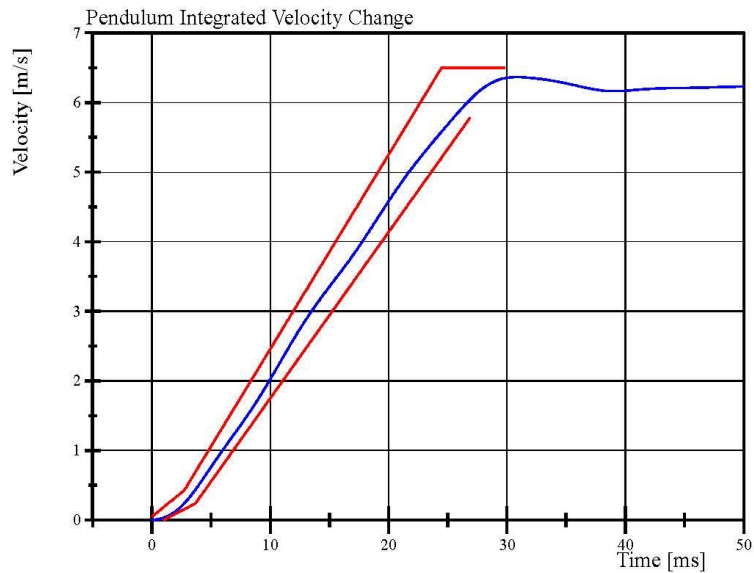

Filter Class: CFC\_60  
Max: 6.4 m/s at 30.9 ms  
Min: 0.0 m/s at 0.0 ms


Specification Source: CFR49 Part 572 Subpart U  
with Polarity in accordance with J211

11.04.2019 12:09:49 639




## Transportation Research Center Inc.


Left Lateral Lumbar  
ES-2re Serial No. F030 Certification No. 68-2  
Test Date: 11/4/2019

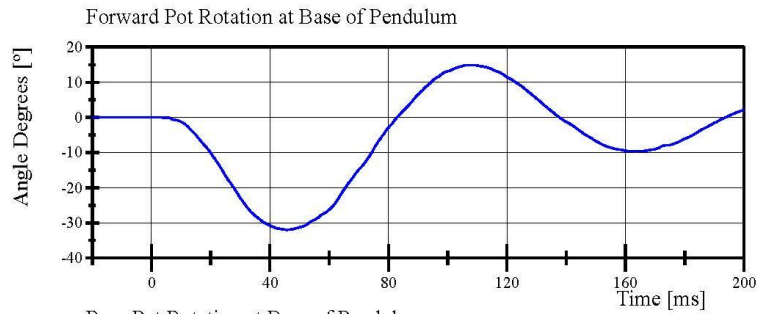


Filter Class: CFC\_180  
Max: 14.9 ° at 106.8 ms  
Min: -32.0 ° at 45.8 ms

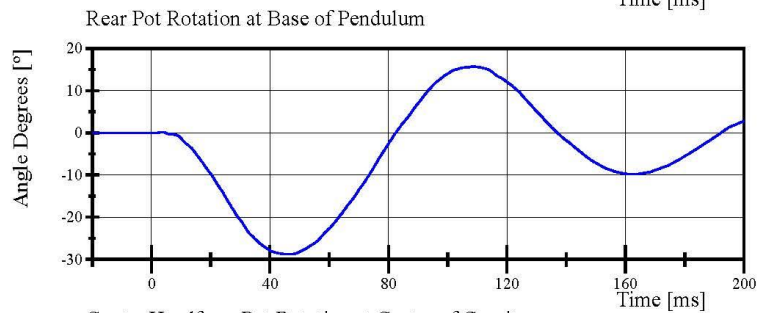

Filter Class: CFC\_180  
Max: 15.7 ° at 108.6 ms  
Min: -28.8 ° at 46.1 ms

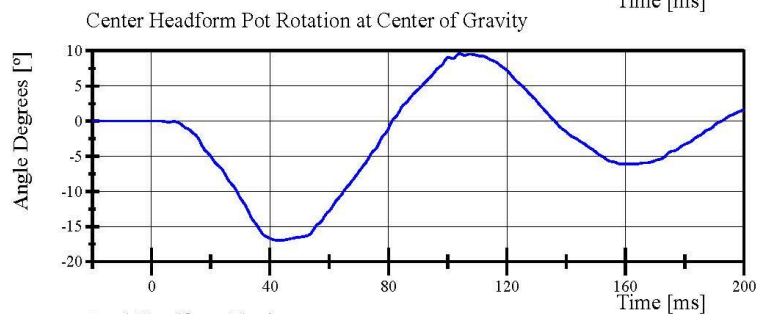

Filter Class: CFC\_180  
Max: 9.6 ° at 104.0 ms  
Min: -16.9 ° at 43.7 ms

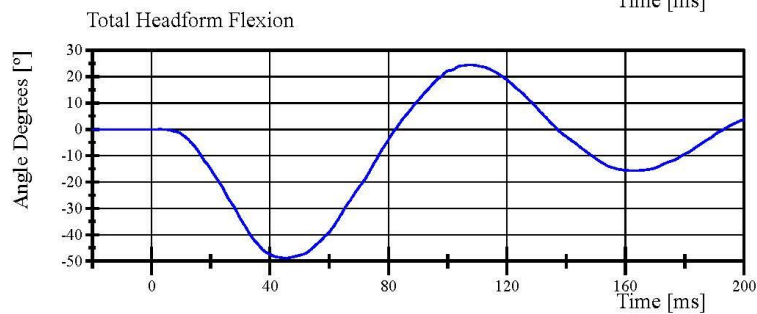

Filter Class: CFC\_180  
Max: 24.4 ° at 107.5 ms  
Min: -48.8 ° at 45.3 ms

Specification Source: CFR49 Part 572 Subpart U  
with Polarity in accordance with J211

11.04.2019 12:09:49 639



## Transportation Research Center Inc.

Left Lateral Abdomen  
ES-2re Serial No. F030 Certification No. 68-1  
Test Date: 11/4/2019

Test Parameter	Specification	Test Results	Pass
Temperature	20.6 - 22.2 °C	21.8 °C	Yes
Relative Humidity	10 - 70 %	40 %	Yes
Test Probe Velocity	3.9 - 4.1 m/s	4.05 m/s	Yes
Test Probe Force			
Peak	4,000 - 4,800 N	4,109.9 N	Yes
Time of Peak	10.6 - 13.0 ms	11.52 ms	Yes
Total Abdominal Force			
Peak	2,200 - 2,700 N	2,470.8 N	Yes
Time of Peak	10.0 - 12.3 ms	11.12 ms	Yes

**Test meets specifications.**

**Condition:** Used

**Comments:**

**Abdomen S/N: 1066**



Specification Source: CFR49 Part 572 Subpart U  
with Polarity in accordance with J211

11.04.2019 13:42:23 579



## Transportation Research Center Inc.

Left Lateral Abdomen  
ES-2re Serial No. F030 Certification No. 68-1  
Test Date: 11/4/2019

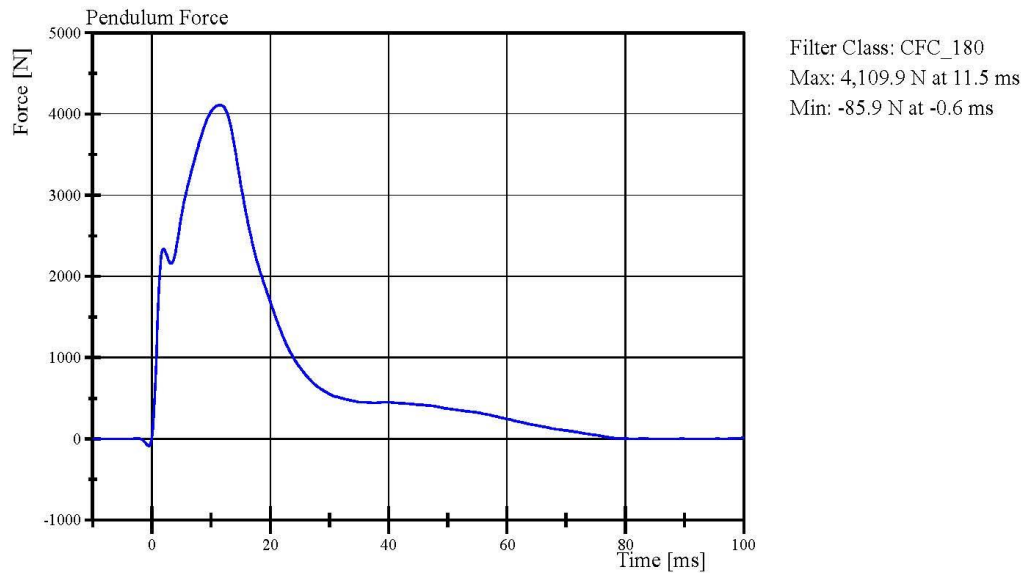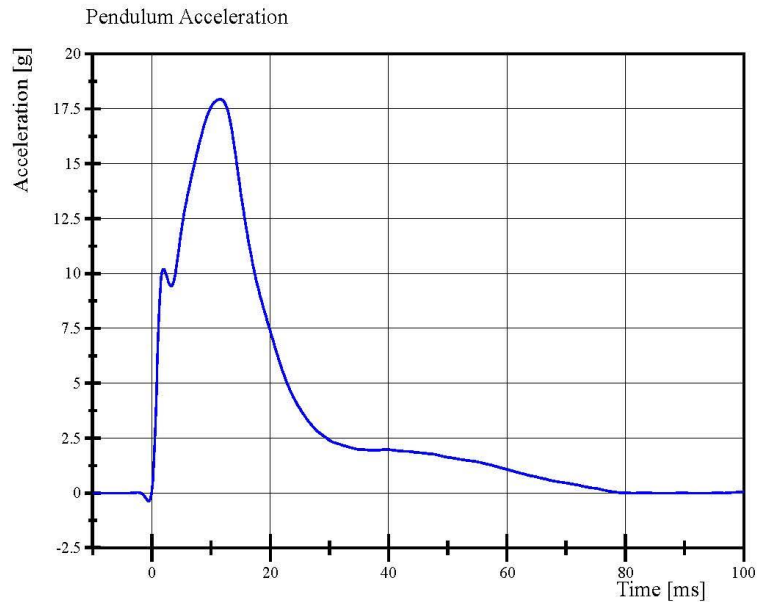

Specification Source: CFR49 Part 572 Subpart U  
with Polarity in accordance with J211

11.04.2019 13:43:03 579









## Transportation Research Center Inc.

Left Lateral Abdomen

ES-2re Serial No. F030 Certification No. 68-1

Test Date: 11/4/2019

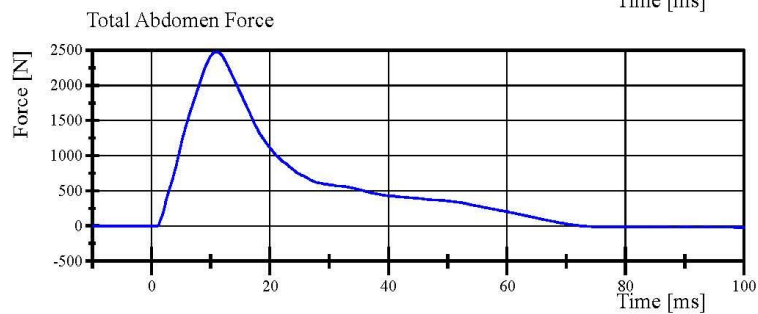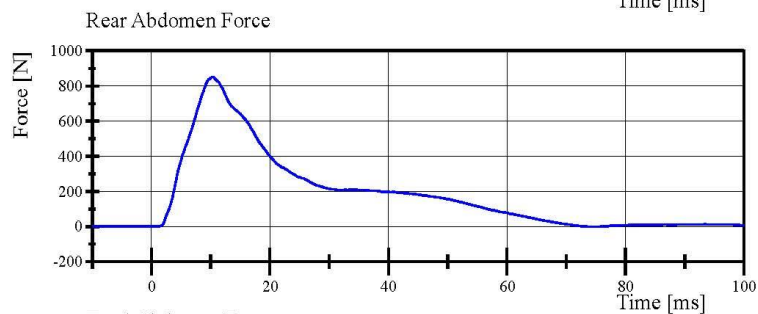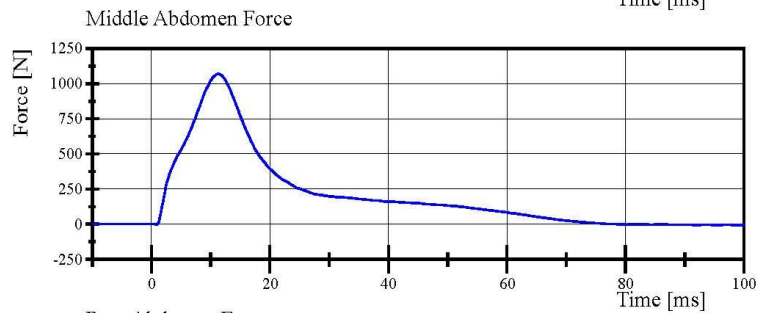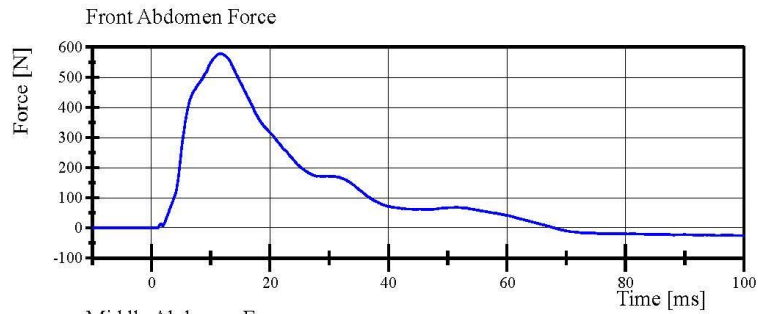

Specification Source: CFR49 Part 572 Subpart U  
with Polarity in accordance with J211

11.04.2019 13:43:03 579



## Transportation Research Center Inc.

Left Lateral Pelvis  
ES-2re Serial No. F030 Certification No. 68-1  
Test Date: 11/4/2019

Test Parameter	Specification	Test Results	Pass
Temperature	20.6 - 22.2 °C	21.8 °C	Yes
Relative Humidity	10 - 70 %	38 %	Yes
Test Probe Velocity	4.2 - 4.4 m/s	4.33 m/s	Yes
Test Probe Force			
Peak	4,700 - 5,400 N	5,130.4 N	Yes
Time of Peak	11.8 - 16.1 ms	12.64 ms	Yes
Pubic Symphysis Force			
Peak	(-1,230) - (-1,590) N	-1,264.5 N	Yes
Time of Peak	12.2 - 17.0 ms	12.48 ms	Yes

**Test meets specifications.**

**Condition:** Used

**Comments:**

**Pelvis Skin S/N:** N/A


Specification Source: CFR49 Part 572 Subpart U  
with Polarity in accordance with J211

11.04.2019 13:57:22 536




## Transportation Research Center Inc.


Left Lateral Pelvis  
ES-2re Serial No. F030 Certification No. 68-1  
Test Date: 11/4/2019

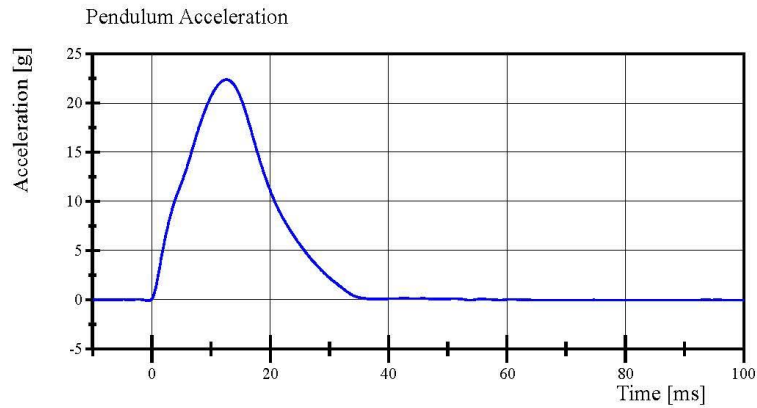

Filter Class: CFC\_180  
Max: 22.4 g at 12.6 ms  
Min: -0.1 g at -0.6 ms

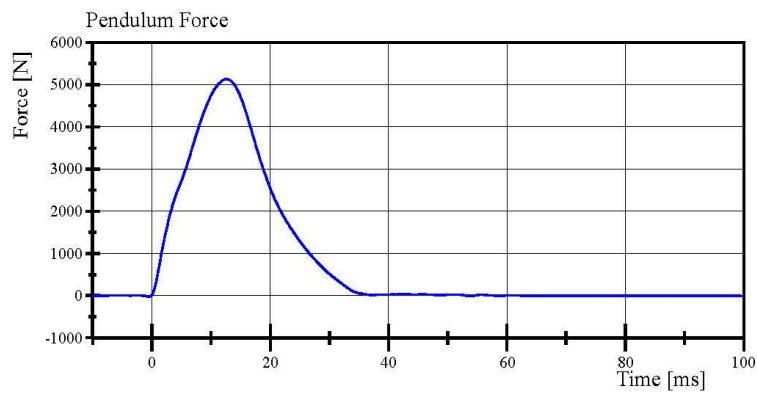

Filter Class: CFC\_180  
Max: 5,130.4 N at 12.6 ms  
Min: -20.6 N at -0.6 ms

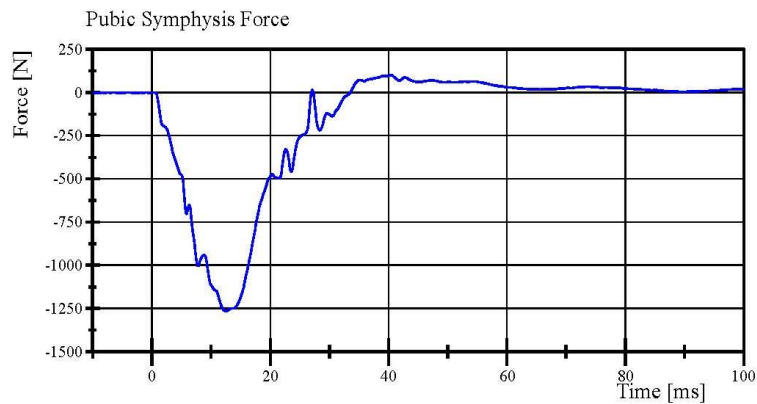

Filter Class: CFC\_600  
Max: 102.6 N at 40.4 ms  
Min: -1,264.5 N at 12.5 ms

Specification Source: CFR49 Part 572 Subpart U  
with Polarity in accordance with J211

11.04.2019 13:58:26 536



**Post-Test Calibration Sheets**  
**Driver S/N F030**



**Transportation Research Center Inc.**  
**572U ES-2re Dummy**  
**External Dimensions**  
**Serial No. F030 Calibration No. 69**

Symbol	Description	Specification	Results	Pass
		mm	mm	
1	Sitting Height	900.0 - 918.0	909	Yes
2	Seat to Shoulder Joint	558.0 - 572.0	560	Yes
3	Seat to Lower Face of Thoracic Spine Box	346.0 - 356.0	347	Yes
4	Seat to Hip Joint (center of bolt)	97.0 - 103.0	98	Yes
5	Sole to Seat, Sitting	433.0 - 451.0	444	Yes
6	Head Width	152.0 - 158.0	155	Yes
7	Shoulder/Arm Width	461.0 - 479.0	475	Yes
8	Thorax Width	322.0 - 332.0	328	Yes
9	Abdomen Width	273.0 - 287.0	280	Yes
10	Pelvis Lap Width	359.0 - 373.0	367	Yes
11	Head Depth	196.0 - 206.0	201	Yes
12	Thorax Depth	262.0 - 272.0	262	Yes
13	Abdomen Depth	194.0 - 204.0	199	Yes
14	Pelvis Depth	235.0 - 245.0	242	Yes
15	Back of Buttocks to Hip Joint (center of bolt)	150.0 - 160.0	156	Yes
16	Back of Buttocks to Front of Knee	597.0 - 615.0	605	Yes

Baseline 10/07/05



## Transportation Research Center Inc.

Left Lateral Head Drop  
ES-2re Serial No. F030 Certification No. 69-2  
Test Date: 12/6/2019

Test Parameter	Specification	Test Results	Pass
Temperature	20.6 - 22.2 °C	21.7 °C	Yes
Relative Humidity	10 - 70 %	39 %	Yes
Peak Resultant Acceleration	125 - 155 g	132.7 g	Yes
Peak Longitudinal Acceleration	(-15) - 15 g	7.3 g	Yes
Is Resultant Acceleration Curve Unimodal within 15% of Main Pulse?	< 15 %	4.68 %	Yes

**Test meets specifications.**

**Condition: Used**

**Comments:**

**Head Skin S/N: DP6812**

Specification Source: CFR49 Part 572 Subpart U  
with Polarity in accordance with J211

12.06.2019 12:54:10 326




## Transportation Research Center Inc.

Left Lateral Head Drop

ES-2re Serial No. F030 Certification No. 69-2


Test Date: 12/6/2019

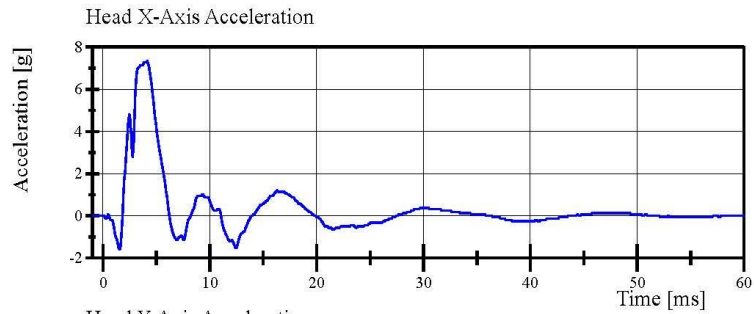

Filter Class: CFC\_1000

Max: 7.3 g at 4.2 ms


Min: -1.6 g at 1.5 ms

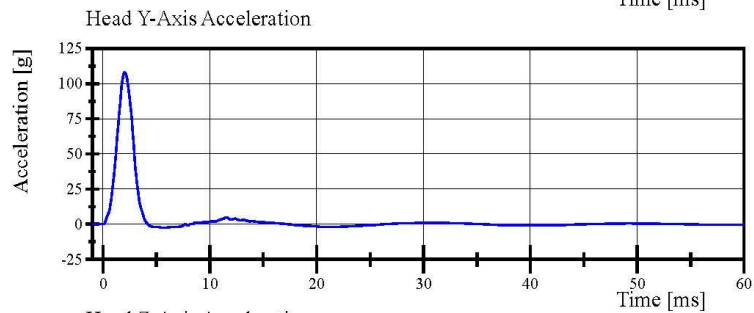

Filter Class: CFC\_1000

Max: 107.9 g at 2.0 ms


Min: -2.5 g at 5.8 ms

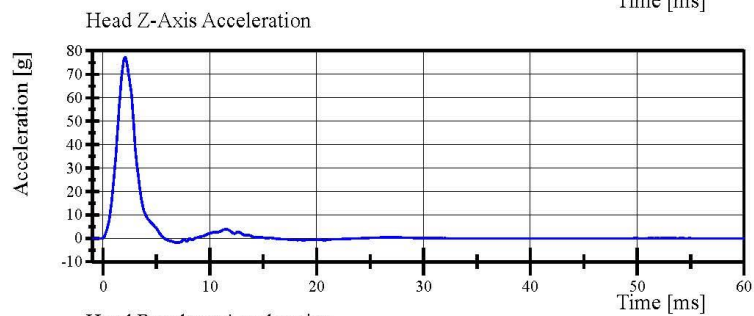

Filter Class: CFC\_1000

Max: 77.3 g at 2.1 ms

Min: -1.9 g at 6.9 ms

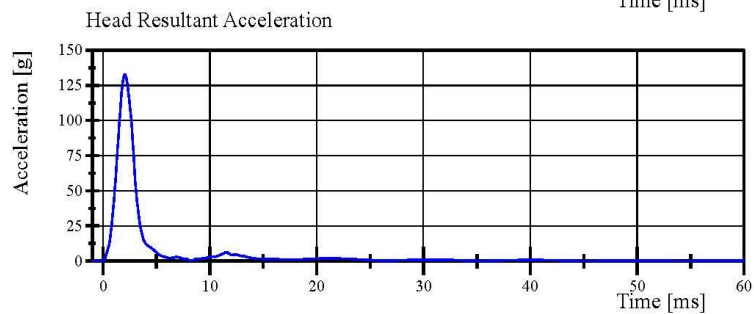

Filter Class: CFC\_1000

Max: 132.7 g at 2.1 ms

Min: 0.0 g at -1.0 ms

Specification Source: CFR49 Part 572 Subpart U  
with Polarity in accordance with J211

12.06.2019 12:56:53 326



## Transportation Research Center Inc.

Left Lateral Neck  
ES-2re Serial No. F030 Certification No. 69-1  
Test Date: 12/5/2019

Test Parameter	Specification	Test Results	Pass
Temperature	20.6 - 22.2 °C	21.1 °C	Yes
Relative Humidity	10 - 70 %	41 %	Yes
Pendulum Integrated Velocity Change within Corridor	Yes	Yes	Yes
Pendulum Velocity	(-3.3) - (-3.5) m/s	-3.37 m/s	Yes
Maximum Headform Flexion			
Peak	(-49) - (-59) deg	-49.1 deg	Yes
Time of Peak	54 - 66 ms	55.9 ms	Yes
Headform Flexion Decay			
- Peak to Zero	53 - 88 ms	58.5 ms	Yes

**Test meets specifications.**

**Condition:** Used

**Comments:**

**Neck S/N: 05053**

Specification Source: CFR49 Part 572 Subpart U  
with Polarity in accordance with J211

12.05.2019 19:35:00 1462







## Transportation Research Center Inc.

Left Lateral Neck

ES-2re Serial No. F030 Certification No. 69-1

Test Date: 12/5/2019

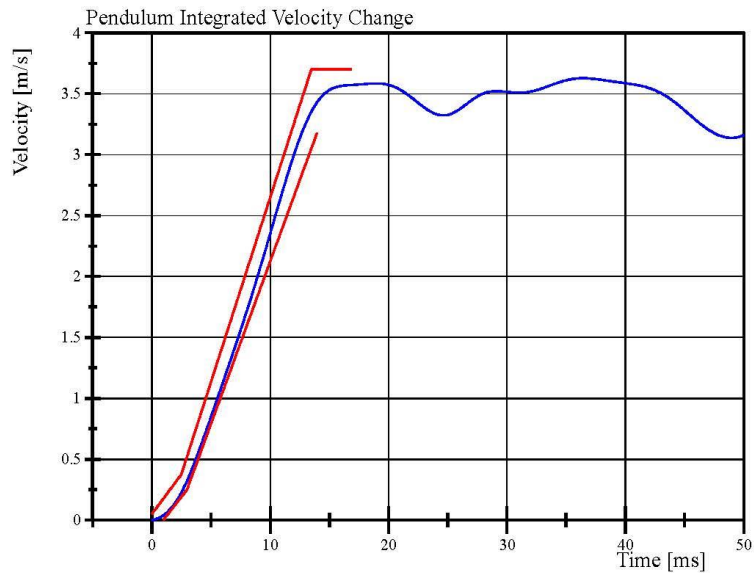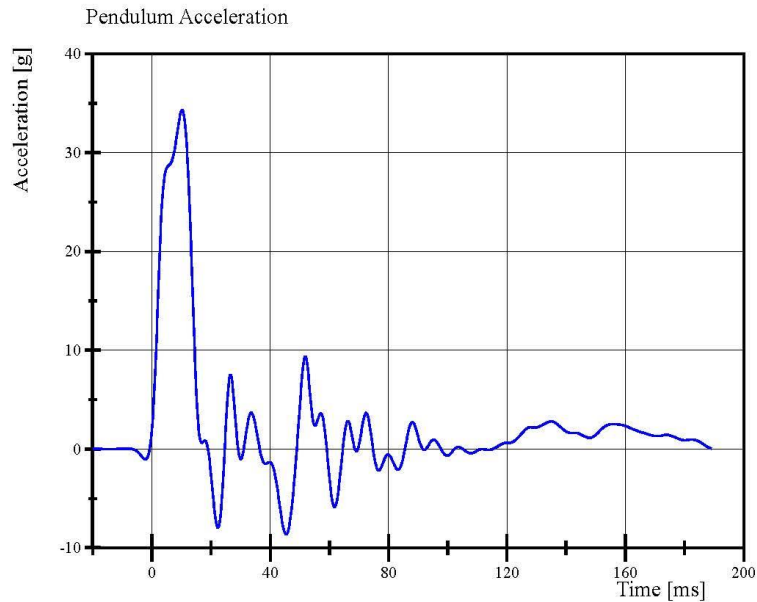

Specification Source: CFR49 Part 572 Subpart U  
with Polarity in accordance with J211

12.05.2019 19:36:01 1462




## Transportation Research Center Inc.

Left Lateral Neck

ES-2re Serial No. F030 Certification No. 69-1


Test Date: 12/5/2019

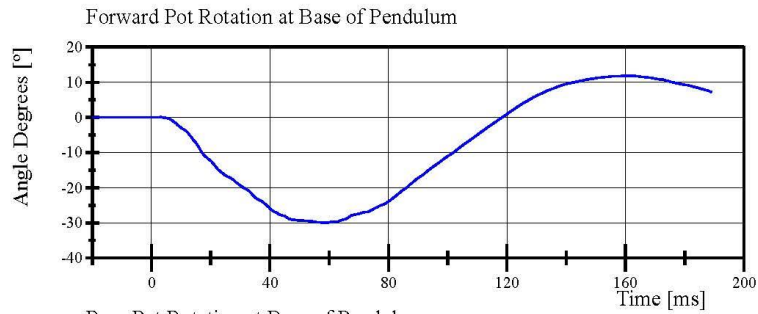

Filter Class: CFC\_180

Max: 11.9 ° at 161.8 ms


Min: -30.0 ° at 58.4 ms

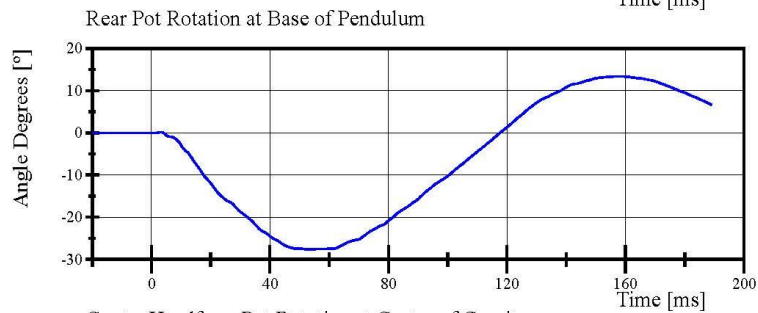

Filter Class: CFC\_180

Max: 13.4 ° at 157.1 ms


Min: -27.7 ° at 53.8 ms

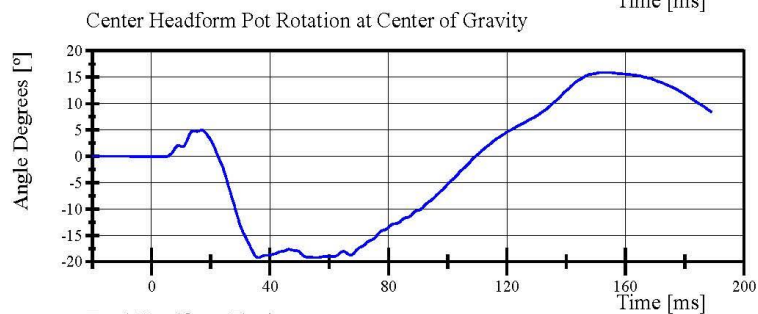

Filter Class: CFC\_180

Max: 15.9 ° at 152.2 ms

Min: -19.3 ° at 36.1 ms

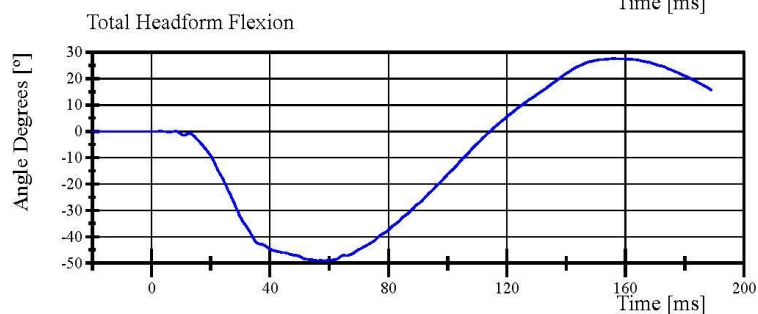

Filter Class: CFC\_180

Max: 27.5 ° at 156.0 ms

Min: -49.1 ° at 55.9 ms

Specification Source: CFR49 Part 572 Subpart U  
with Polarity in accordance with J211

12.05.2019 19:36:02 1462



## Transportation Research Center Inc.

Left Lateral Shoulder  
ES-2re Serial No. F030 Certification No. 69-1  
Test Date: 12/6/2019

Test Parameter	Specification	Test Results	Pass
Temperature	20.6 - 22.2 °C	21.8 °C	Yes
Relative Humidity	10 - 70 %	39 %	Yes
Test Probe Velocity	4.2 - 4.4 m/s	4.30 m/s	Yes
Test Probe Acceleration	(-7.5) - (-10.5) g	-9.71 g	Yes

**Test meets specifications.**

**Condition:** Used

**Comments:**

**Arm S/N: 175-3501-07014**


Specification Source: CFR49 Part 572 Subpart U  
with Polarity in accordance with J211

12.06.2019 10:48:20 547



## Transportation Research Center Inc.

Left Lateral Shoulder  
ES-2re Serial No. F030 Certification No. 69-1  
Test Date: 12/6/2019

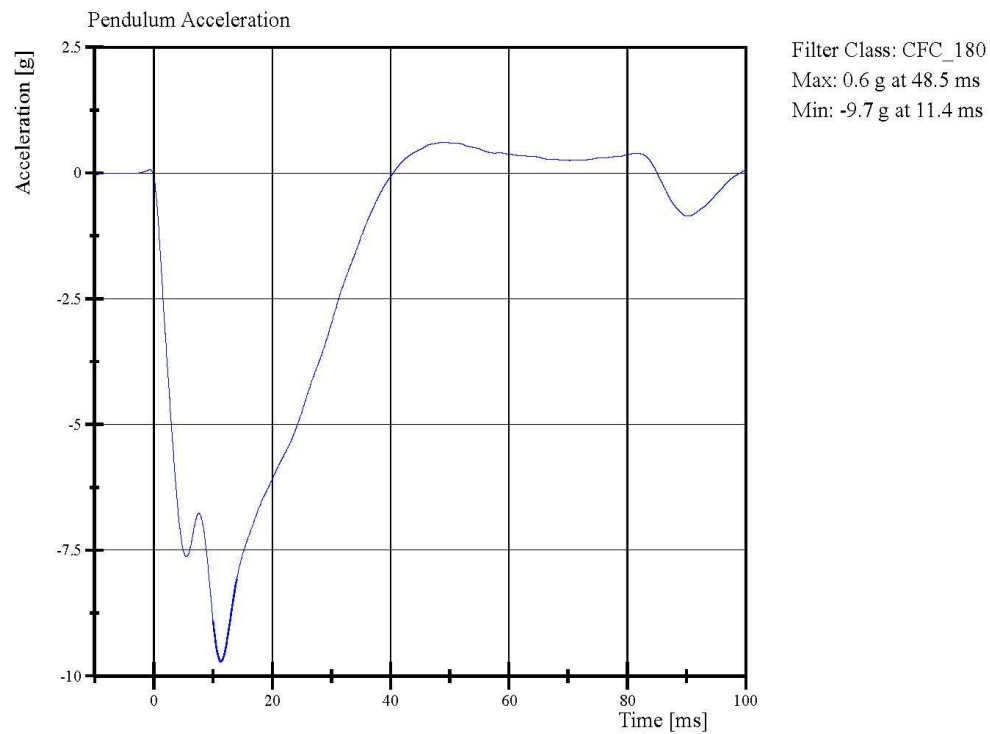

Specification Source: CFR49 Part 572 Subpart U  
with Polarity in accordance with J211

12.06.2019 10:48:58 547





## Transportation Research Center Inc.

3.0 m/s Upper Full Rib Module  
ES-2re Serial No. F030 Certification No. 69-1  
Test Date: 12/5/2019

Test Parameter	Specification	Test Results	Pass
Temperature	20.6 - 22.2 °C	21.4 °C	Yes
Relative Humidity	10 - 70 %	38 %	Yes
3.0 m/s Test Rib Displacement (454 mm to 464 mm)	36 - 40 mm	37.5 mm	Yes

**Test meets specifications.**

**Condition:** Used

**Comments:**

**Drop Height:** 462mm

**Rib Module:** 175-4008-A


Specification Source: CFR49 Part 572 Subpart U  
with Polarity in accordance with J211

12.05.2019 07:57:26 503



## Transportation Research Center Inc.

3.0 m/s Upper Full Rib Module  
ES-2re Serial No. F030 Certification No. 69-1  
Test Date: 12/5/2019

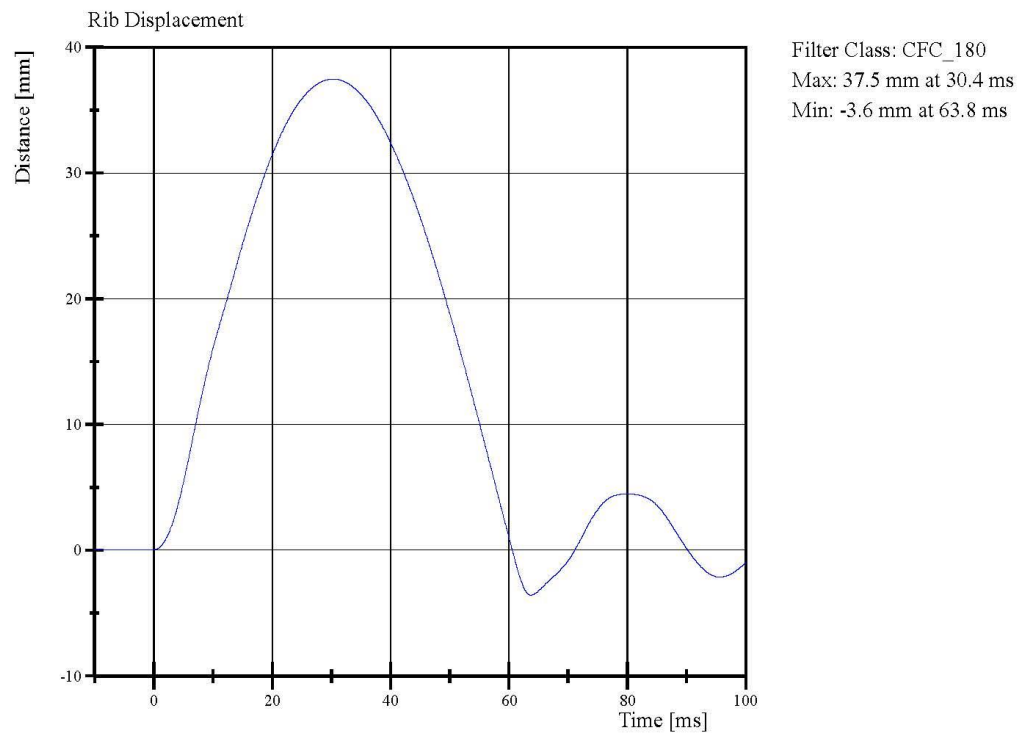

Specification Source: CFR49 Part 572 Subpart U  
with Polarity in accordance with J211

12.05.2019 07:57:52 503



## Transportation Research Center Inc.

4.0 m/s Upper Full Rib Module  
ES-2re Serial No. F030 Certification No. 69-1  
Test Date: 12/5/2019

Test Parameter	Specification	Test Results	Pass
Temperature	20.6 - 22.2 °C	21.2 °C	Yes
Relative Humidity	10 - 70 %	39 %	Yes
4.0 m/s Test Rib Displacement (807 mm to 823 mm)	46 - 51 mm	46.7 mm	Yes

**Test meets specifications.**

**Condition:** Used

**Comments:**

**Drop Height:** 816mm

**Rib Module:** 175-4008-A


Specification Source: CFR49 Part 572 Subpart U  
with Polarity in accordance with J211

12.05.2019 07:52:41 392



## Transportation Research Center Inc.

4.0 m/s Upper Full Rib Module  
ES-2re Serial No. F030 Certification No. 69-1  
Test Date: 12/5/2019

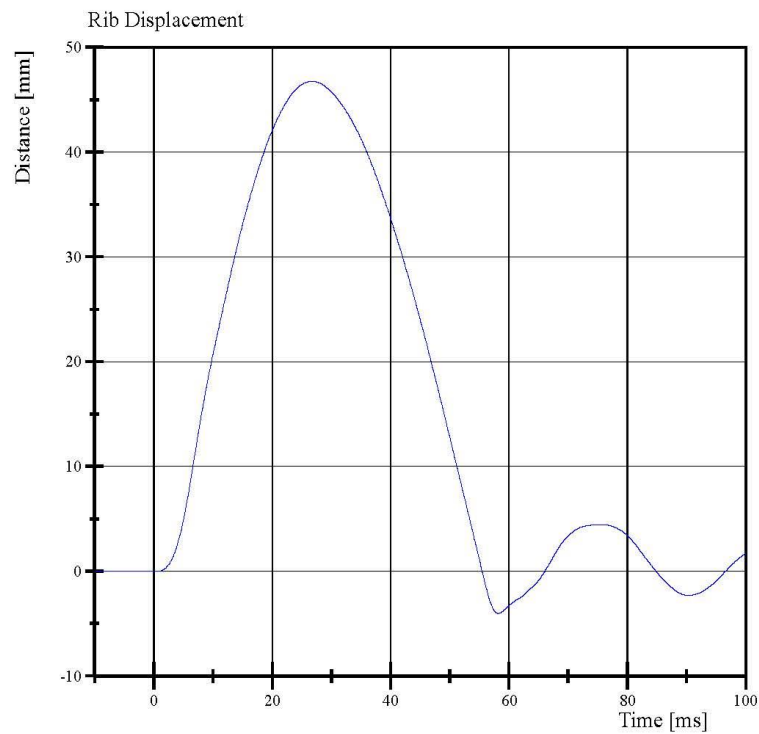

Filter Class: CFC\_180  
Max: 46.7 mm at 26.7 ms  
Min: -4.0 mm at 58.2 ms

Specification Source: CFR49 Part 572 Subpart U  
with Polarity in accordance with J211

12.05.2019 07:53:21 392





## Transportation Research Center Inc.

3.0 m/s Middle Full Rib Module  
ES-2re Serial No. F030 Certification No. 69-1  
Test Date: 12/5/2019

Test Parameter	Specification	Test Results	Pass
Temperature	20.6 - 22.2 °C	21.4 °C	Yes
Relative Humidity	10 - 70 %	41 %	Yes
3.0 m/s Test Rib Displacement (454 mm to 464 mm)	36 - 40 mm	37.7 mm	Yes

**Test meets specifications.**

**Condition:** Used

**Comments:**

**Drop Height:** 462 mm

**Rib Module:** 175-4008-A


Specification Source: CFR49 Part 572 Subpart U  
with Polarity in accordance with J211

12.05.2019 08:26:19 490



## Transportation Research Center Inc.

3.0 m/s Middle Full Rib Module  
ES-2re Serial No. F030 Certification No. 69-1  
Test Date: 12/5/2019

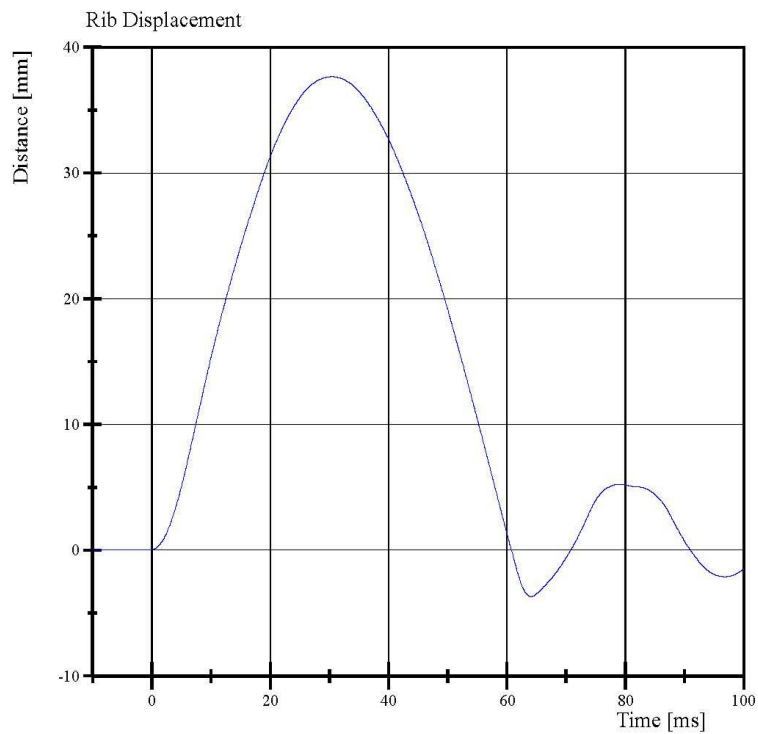

Filter Class: CFC\_180  
Max: 37.7 mm at 30.4 ms  
Min: -3.7 mm at 64.1 ms

Specification Source: CFR49 Part 572 Subpart U  
with Polarity in accordance with J211

12.05.2019 08:27:09 490



## Transportation Research Center Inc.

4.0 m/s Middle Full Rib Module  
ES-2re Serial No. F030 Certification No. 69-1  
Test Date: 12/5/2019

Test Parameter	Specification	Test Results	Pass
Temperature	20.6 - 22.2 °C	21.6 °C	Yes
Relative Humidity	10 - 70 %	39 %	Yes
4.0 m/s Test Rib Displacement (807 mm to 823 mm)	46 - 51 mm	49.0 mm	Yes

**Test meets specifications.**

**Condition:** Used

**Comments:**

**Drop Height:** 816 mm

**Rib Module:** 175-4008-A


Specification Source: CFR49 Part 572 Subpart U  
with Polarity in accordance with J211

12.05.2019 08:15:56 411



## Transportation Research Center Inc.

4.0 m/s Middle Full Rib Module  
ES-2re Serial No. F030 Certification No. 69-1  
Test Date: 12/5/2019

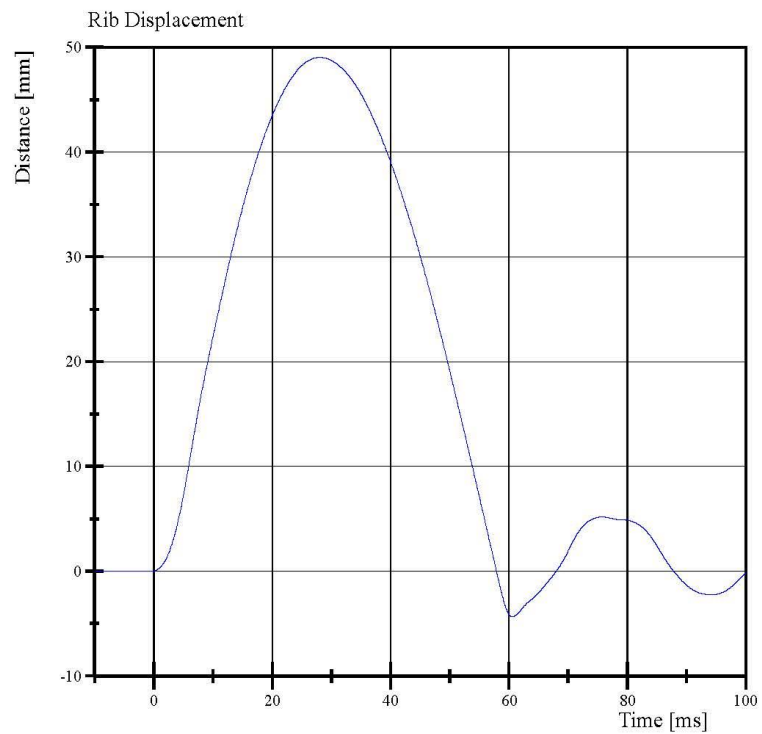

Filter Class: CFC\_180  
Max: 49.0 mm at 28.1 ms  
Min: -4.4 mm at 60.6 ms

Specification Source: CFR49 Part 572 Subpart U  
with Polarity in accordance with J211

12.05.2019 08:16:31 411



## Transportation Research Center Inc.

3.0 m/s Lower Full Rib Module  
ES-2re Serial No. F030 Certification No. 69-1  
Test Date: 12/5/2019

Test Parameter	Specification	Test Results	Pass
Temperature	20.6 - 22.2 °C	21.2 °C	Yes
Relative Humidity	10 - 70 %	39 %	Yes
3.0 m/s Test Rib Displacement (454 mm to 464 mm)	36 - 40 mm	37.2 mm	Yes

**Test meets specifications.**

**Condition:** Used

**Comments:**

**Drop Height:** 462 mm

**Rib Module:** 175-4008-A-06-017

Specification Source: CFR49 Part 572 Subpart U  
with Polarity in accordance with J211


12.05.2019 08:41:46 468





## Transportation Research Center Inc.

3.0 m/s Lower Full Rib Module  
ES-2re Serial No. F030 Certification No. 69-1  
Test Date: 12/5/2019

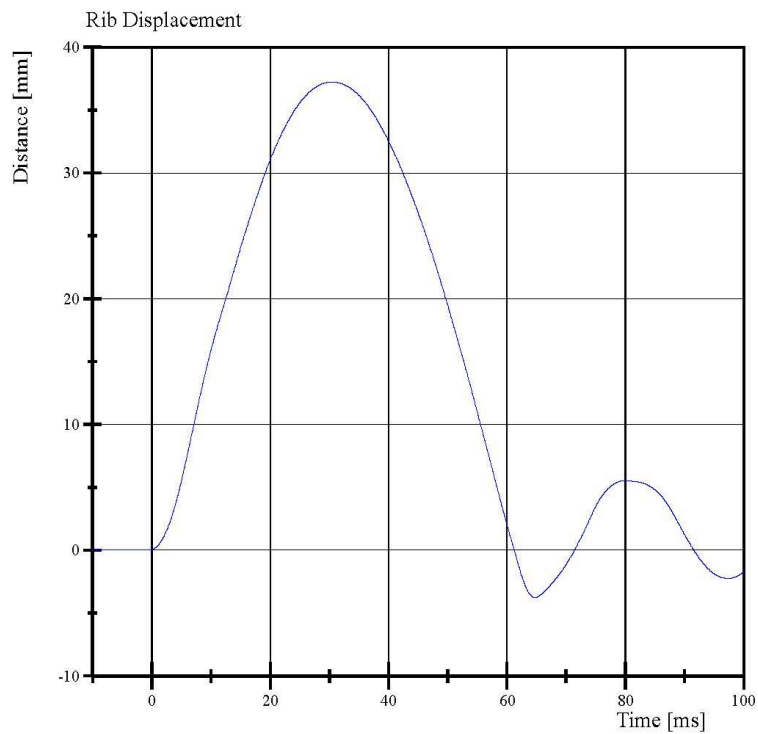

Filter Class: CFC\_180  
Max: 37.2 mm at 30.5 ms  
Min: -3.8 mm at 64.7 ms

Specification Source: CFR49 Part 572 Subpart U  
with Polarity in accordance with J211

12.05.2019 08:42:22 468



## Transportation Research Center Inc.

4.0 m/s Lower Full Rib Module  
ES-2re Serial No. F030 Certification No. 69-1  
Test Date: 12/5/2019

Test Parameter	Specification	Test Results	Pass
Temperature	20.6 - 22.2 °C	21.3 °C	Yes
Relative Humidity	10 - 70 %	41 %	Yes
4.0 m/s Test Rib Displacement (807 mm to 823 mm)	46 - 51 mm	48.7 mm	Yes

**Test meets specifications.**

**Condition:** Used

**Comments:**

**Drop Height:** 816 mm

**Rib Module:** 175-4008-A-06-017


Specification Source: CFR49 Part 572 Subpart U  
with Polarity in accordance with J211

12.05.2019 08:31:42 416



## Transportation Research Center Inc.

4.0 m/s Lower Full Rib Module  
ES-2re Serial No. F030 Certification No. 69-1  
Test Date: 12/5/2019

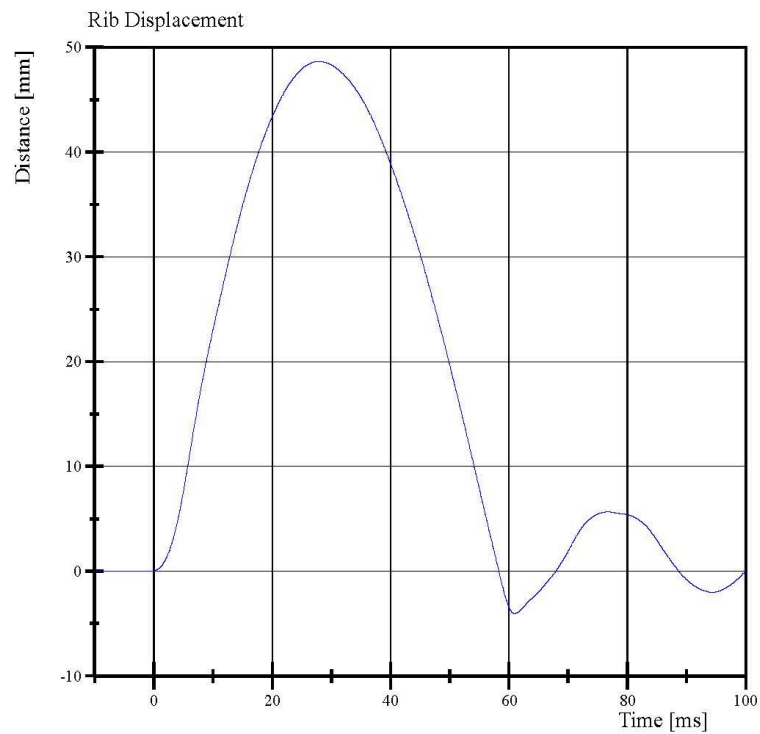

Filter Class: CFC\_180  
Max: 48.7 mm at 27.9 ms  
Min: -4.1 mm at 61.0 ms

Specification Source: CFR49 Part 572 Subpart U  
with Polarity in accordance with J211

12.05.2019 08:32:21 416



## Transportation Research Center Inc.

Left Lower Thorax  
ES-2re Serial No. F030 Certification No. 69-1  
Test Date: 12/6/2019

Test Parameter	Specification	Test Results	Pass
Temperature	20.6 - 22.2 °C	21.8 °C	Yes
Relative Humidity	10 - 70 %	41 %	Yes
Impactor Velocity	5.4 - 5.60 m/s	5.462 m/s	Yes
Peak Impactor Force after 6 ms	(-5,100) - (-6,200) N	-5,683.1 N	Yes
Upper Rib Displacement	34 - 41 mm	38.9 mm	Yes
Center Rib Displacement	37 - 45 mm	41.2 mm	Yes
Lower Rib Displacement	37 - 44 mm	40.8 mm	Yes

**Test meets specifications.**

**Condition:** Used

**Comments:**

**Upper Rib Module S/N: 175-4008-A**

**Upper Rib Foam S/N: 175-4003-EK6973**

**Middle Rib Module S/N: 175-4008-A**

**Middle Rib Foam S/N: 175-4003-EK6970**

**Lower Rib Module S/N: 175-4008-A-06-017**

**Lower Rib Foam S/N: 175-4008-EK6971**


Specification Source: CFR49 Part 572 Subpart U  
with Polarity in accordance with J211

12.06.2019 11:04:42 437



## Transportation Research Center Inc.

Left Lower Thorax  
ES-2re Serial No. F030 Certification No. 69-1  
Test Date: 12/6/2019

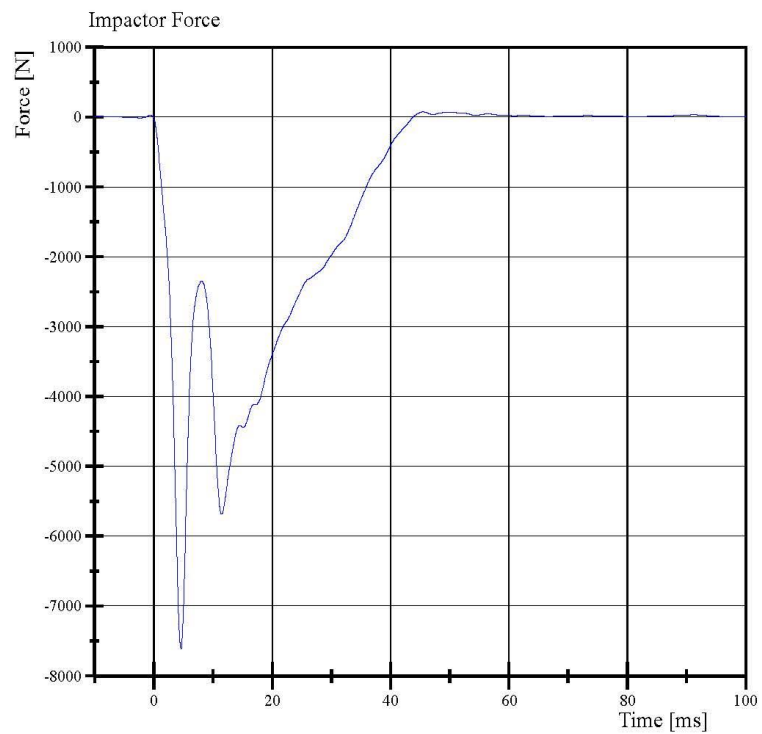

Filter Class: CFC\_180  
Max: 76.0 N at 45.5 ms  
Min: -7,612.9 N at 4.6 ms

Specification Source: CFR49 Part 572 Subpart U  
with Polarity in accordance with J211

12.06.2019 11:07:45 437








## Transportation Research Center Inc.

Left Lower Thorax

ES-2re Serial No. F030 Certification No. 69-1

Test Date: 12/6/2019

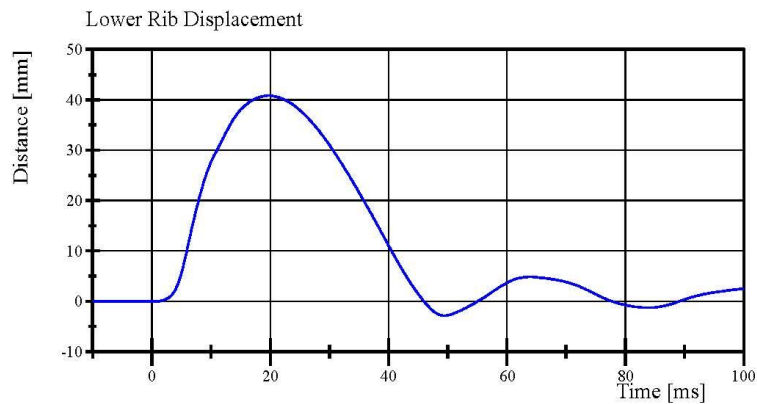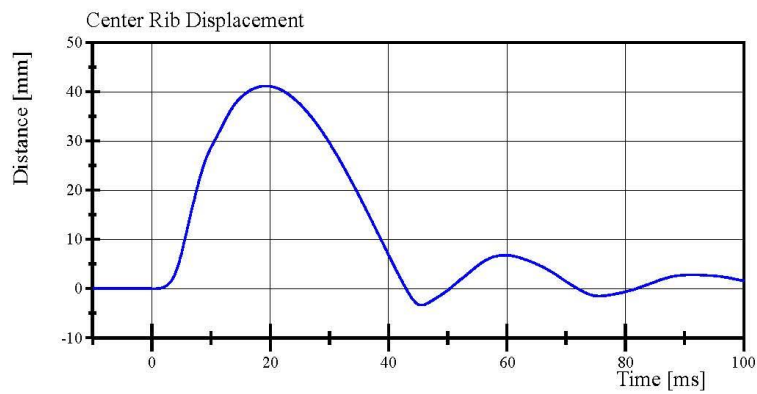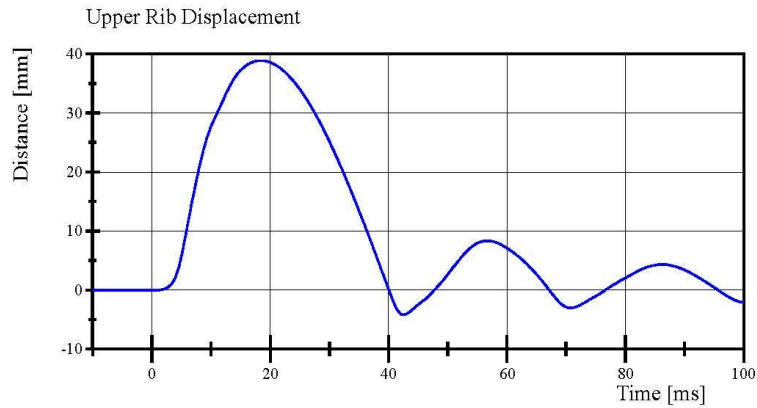

Specification Source: CFR49 Part 572 Subpart U  
with Polarity in accordance with J211

12.06.2019 11:07:45 437



## Transportation Research Center Inc.

Left Lateral Lumbar  
ES-2re Serial No. F030 Certification No. 69-1  
Test Date: 12/5/2019

Test Parameter	Specification	Test Results	Pass
Temperature	20.6 - 22.2 °C	21.6 °C	Yes
Relative Humidity	10 - 70 %	39 %	Yes
Pendulum Integrated Velocity Change within Corridor	Yes	Yes	Yes
Pendulum Velocity	(-5.95) - (-6.15) m/s	-6.119 m/s	Yes
Maximum Headform Flexion			
Peak	(-45) - (-55) deg	-48.9 deg	Yes
Time of Peak	39 - 53 ms	44.8 ms	Yes
Headform Flexion Decay			
- Peak to Zero	37 - 57 ms	38.0 ms	Yes

**Test meets specifications.**

**Condition:** Used

**Comments:**

**Lumbar S/N: 150365**


Specification Source: CFR49 Part 572 Subpart U  
with Polarity in accordance with J211

12.05.2019 19:05:39 635




## Transportation Research Center Inc.

Left Lateral Lumbar  
ES-2re Serial No. F030 Certification No. 69-1  
Test Date: 12/5/2019

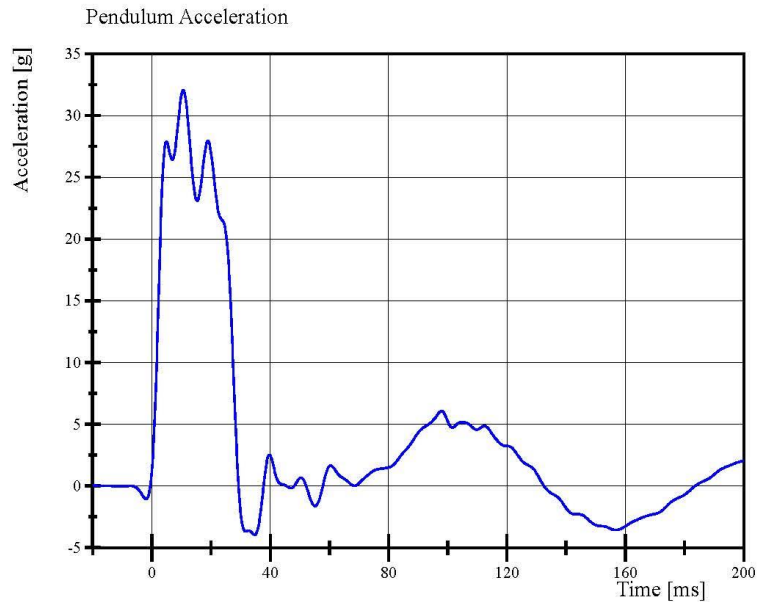

Filter Class: CFC\_60  
Max: 32.1 g at 10.6 ms  
Min: -3.9 g at 34.7 ms

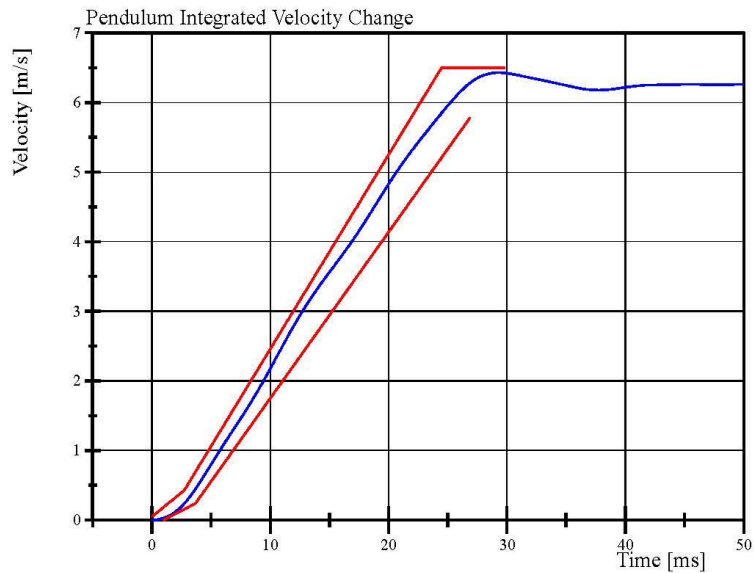

Filter Class: CFC\_60  
Max: 6.4 m/s at 29.3 ms  
Min: 0.0 m/s at 0.0 ms


Specification Source: CFR49 Part 572 Subpart U  
with Polarity in accordance with J211

12.05.2019 19:06:32 635




## Transportation Research Center Inc.


Left Lateral Lumbar  
ES-2re Serial No. F030 Certification No. 69-1  
Test Date: 12/5/2019

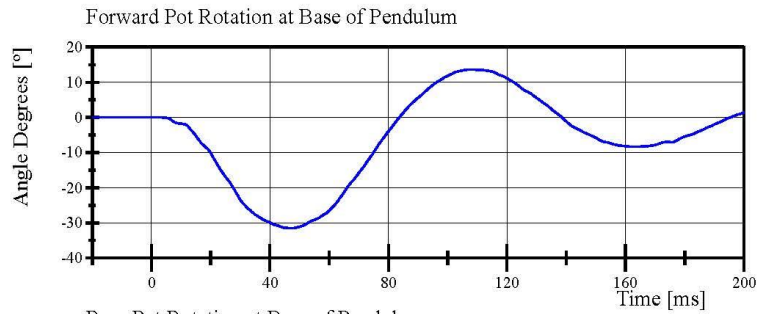


Filter Class: CFC\_180  
Max: 13.6 ° at 108.1 ms  
Min: -31.5 ° at 47.4 ms

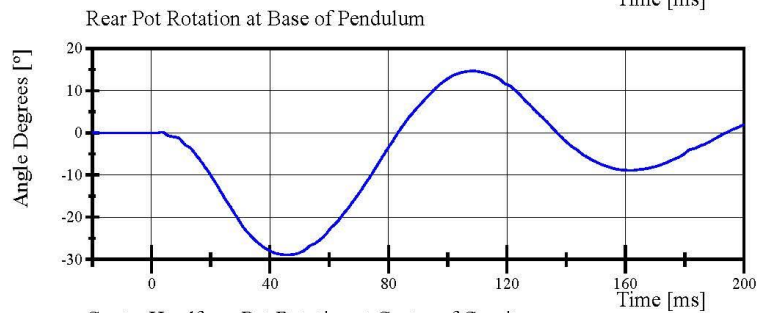

Filter Class: CFC\_180  
Max: 14.6 ° at 108.4 ms  
Min: -29.0 ° at 45.7 ms

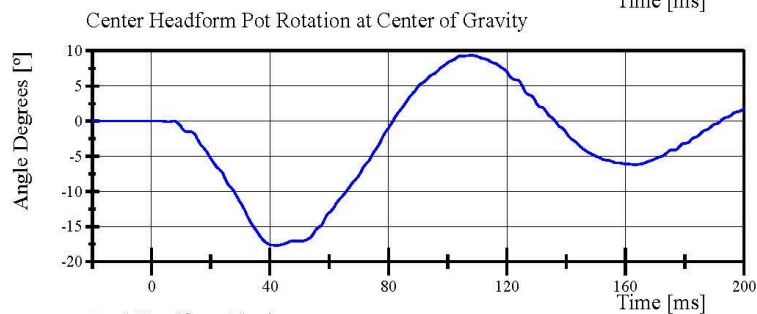

Filter Class: CFC\_180  
Max: 9.3 ° at 108.1 ms  
Min: -17.7 ° at 42.2 ms

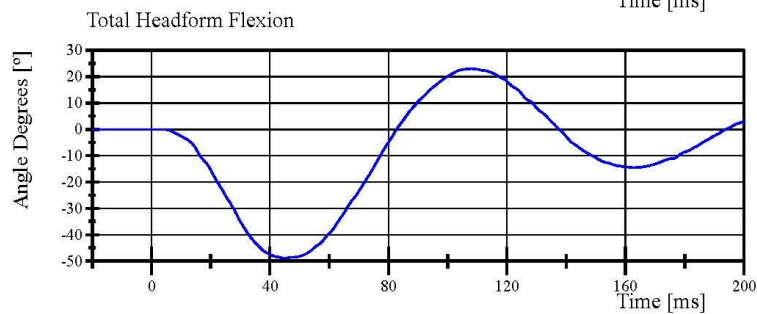

Filter Class: CFC\_180  
Max: 23.0 ° at 108.1 ms  
Min: -48.9 ° at 44.8 ms

Specification Source: CFR49 Part 572 Subpart U  
with Polarity in accordance with J211

12.05.2019 19:06:33 635



## Transportation Research Center Inc.

Left Lateral Abdomen  
ES-2re Serial No. F030 Certification No. 69-1  
Test Date: 12/6/2019

Test Parameter	Specification	Test Results	Pass
Temperature	20.6 - 22.2 °C	21.2 °C	Yes
Relative Humidity	10 - 70 %	40 %	Yes
Test Probe Velocity	3.9 - 4.1 m/s	4.06 m/s	Yes
Test Probe Force			
Peak	4,000 - 4,800 N	4,157.2 N	Yes
Time of Peak	10.6 - 13.0 ms	10.64 ms	Yes
Total Abdominal Force			
Peak	2,200 - 2,700 N	2,487.5 N	Yes
Time of Peak	10.0 - 12.3 ms	10.72 ms	Yes

**Test meets specifications.**

**Condition:** Used

**Comments:**

**Abdomen S/N: 1066**

Specification Source: CFR49 Part 572 Subpart U  
with Polarity in accordance with J211


12.06.2019 11:16:19 567





## Transportation Research Center Inc.

Left Lateral Abdomen  
ES-2re Serial No. F030 Certification No. 69-1  
Test Date: 12/6/2019

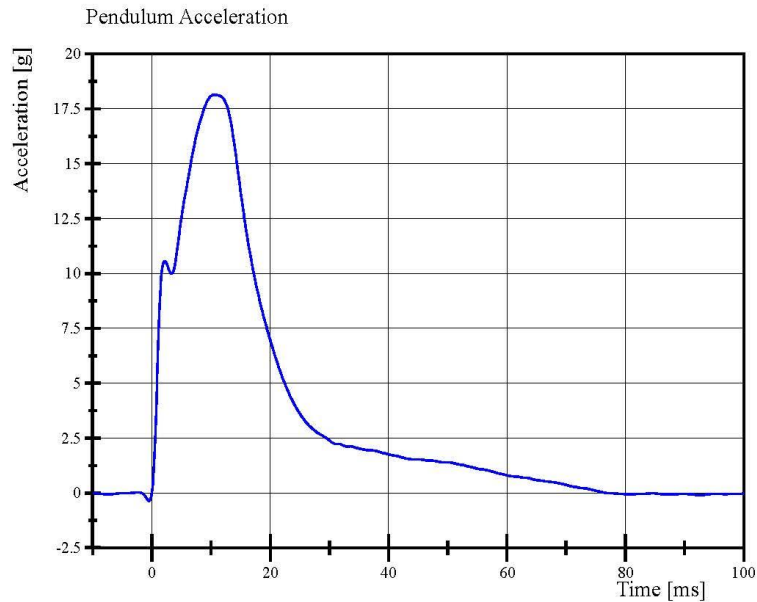

Filter Class: CFC\_180  
Max: 18.1 g at 10.6 ms  
Min: -0.4 g at -0.5 ms



Filter Class: CFC\_180  
Max: 4,157.2 N at 10.6 ms  
Min: -81.4 N at -0.5 ms





Specification Source: CFR49 Part 572 Subpart U  
with Polarity in accordance with J211

12.06.2019 11:17:24 567



## Transportation Research Center Inc.

Left Lateral Abdomen  
ES-2re Serial No. F030 Certification No. 69-1  
Test Date: 12/6/2019

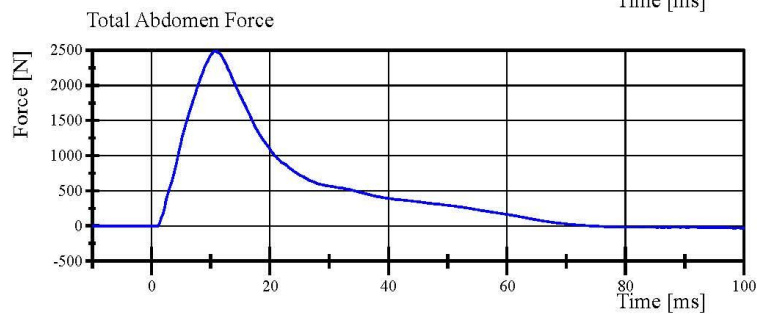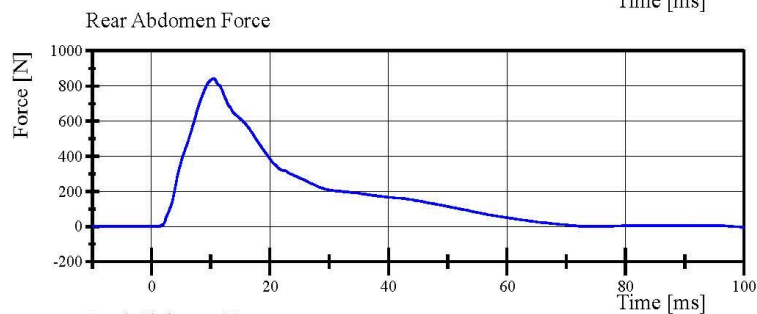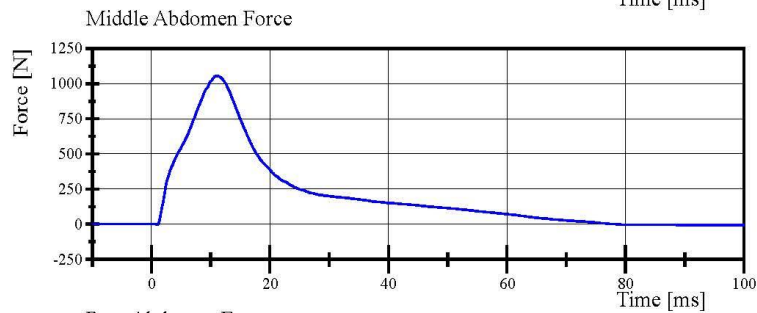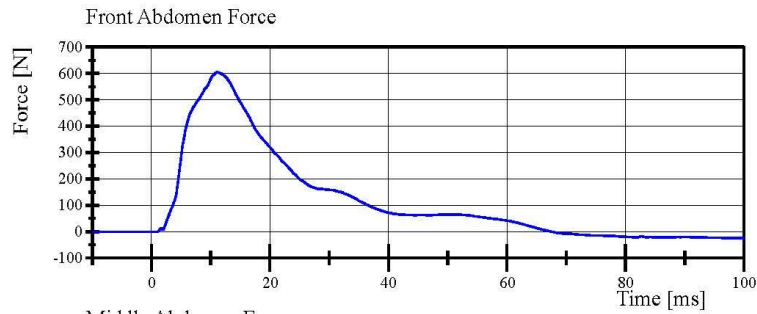

Specification Source: CFR49 Part 572 Subpart U  
with Polarity in accordance with J211

12.06.2019 11:17:24 567



## Transportation Research Center Inc.

Left Lateral Pelvis  
ES-2re Serial No. F030 Certification No. 69-1  
Test Date: 12/6/2019

Test Parameter	Specification	Test Results	Pass
Temperature	20.6 - 22.2 °C	21.7 °C	Yes
Relative Humidity	10 - 70 %	39 %	Yes
Test Probe Velocity	4.2 - 4.4 m/s	4.34 m/s	Yes
Test Probe Force			
Peak	4,700 - 5,400 N	5,164.0 N	Yes
Time of Peak	11.8 - 16.1 ms	12.64 ms	Yes
Pubic Symphysis Force			
Peak	(-1,230) - (-1,590) N	-1,289.7 N	Yes
Time of Peak	12.2 - 17.0 ms	12.80 ms	Yes

**Test meets specifications.**

**Condition:** Used

**Comments:**

**Pelvis Skin S/N:** N/A


Specification Source: CFR49 Part 572 Subpart U  
with Polarity in accordance with J211

12.06.2019 11:23:32 538




## Transportation Research Center Inc.


Left Lateral Pelvis  
ES-2re Serial No. F030 Certification No. 69-1  
Test Date: 12/6/2019

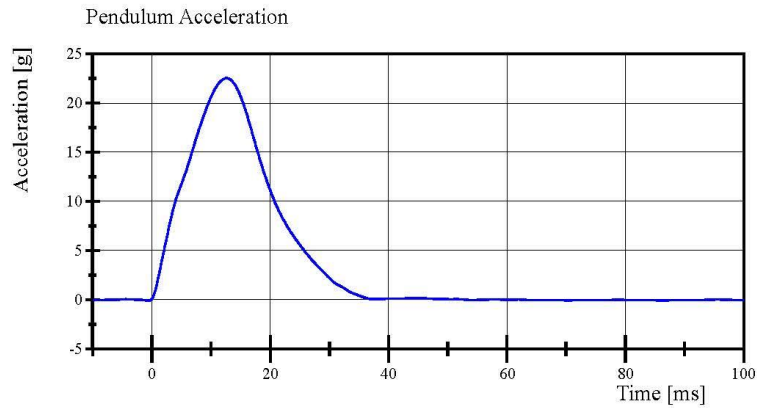

Filter Class: CFC\_180  
Max: 22.5 g at 12.6 ms  
Min: -0.1 g at -0.6 ms

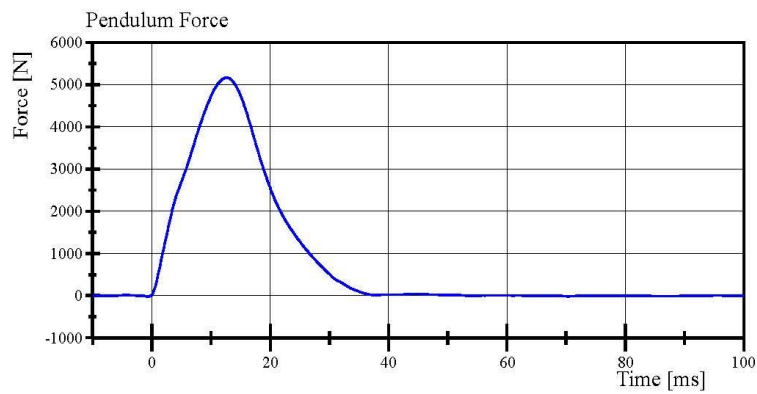

Filter Class: CFC\_180  
Max: 5,164.0 N at 12.6 ms  
Min: -20.5 N at -0.6 ms

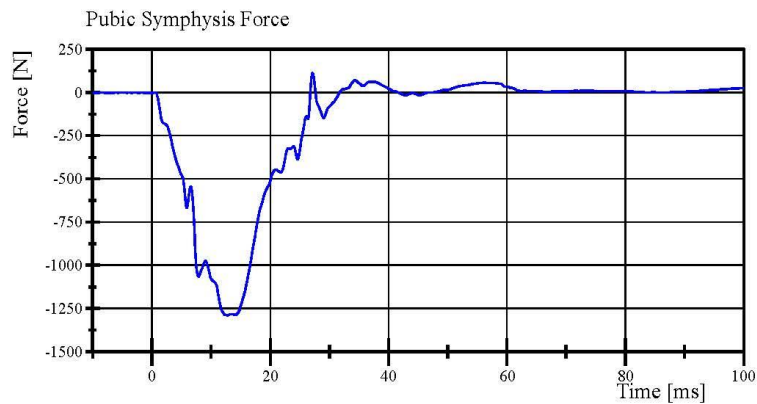

Filter Class: CFC\_600  
Max: 113.0 N at 27.1 ms  
Min: -1,289.7 N at 12.8 ms

Specification Source: CFR49 Part 572 Subpart U  
with Polarity in accordance with J211

12.06.2019 11:23:58 538



**Pre-Test Calibration Sheets**  
**Passenger S/N 305**



**Transportation Research Center Inc.**  
**SIDIIs Dummy - Level D**  
**External Dimensions**  
**Serial No. 305 Calibration No. 76**

Symbol	Description	Specification	Results	Pass
		mm	mm	
A	Sitting Height	772.0 - 788.0	780	Yes
B	Shoulder Pivot Height	437.0 - 453.0	448	Yes
C	H-Point Height	79.0 - 89.0	86	Yes
D	H-Point from Seat Back	141.0 - 151.0	146	Yes
E	Shoulder Pivot from Backline	97.0 - 107.0	100	Yes
F	Thigh Clearance	119.0 - 135.0	130	Yes
G	Head Breadth	140.0 - 148.0	145	Yes
H	Head Back from Backline	40.0 - 46.0	44	Yes
I	Head Depth	178.0 - 188.0	185	Yes
J	Head Circumference	541.0 - 551.0	543	Yes
K	Buttock to Knee Length	514.0 - 540.0	532	Yes
L	Popliteal Height	343.0 - 369.0	349	Yes
M	Knee Pivot to Floor Height	393.0 - 409.0	397	Yes
N	Buttock Popliteal Length	416.0 - 442.0	434	Yes
O	Chest Depth without Jacket	195.0 - 211.0	197	Yes
P	Foot Length (right)	216.0 - 232.0	222	Yes
P	Foot Length (left)	216.0 - 232.0	220	Yes
Q	Hip Breadth	313.0 - 323.0	320	Yes
R	Arm Length	249.0 - 259.0	253	Yes
S	Knee Joint to seat Back	478.0 - 493.0	483	Yes
V	Shoulder Width (only one arm installed)	341.0 - 357.0	350	Yes
W	Foot Width (right)	78.0 - 94.0	85	Yes
W	Foot Width (left)	78.0 - 94.0	85	Yes
Y	Chest Circumference with Jacket	851.0 - 881.0	878	Yes
Z	Waist Circumference	761.0 - 791.0	780	Yes

Revised 9/29/2005



## Transportation Research Center Inc.

Left Lateral Head Drop

SID IIs Serial No. 305 Certification No. 76-2

Test Date: 11/4/2019

Test Parameter	Specification	Test Results	Pass
Temperature	18.9 - 25.6 °C	21.8 °C	Yes
Relative Humidity	10 - 70 %	34 %	Yes
Peak Head Resultant Acceleration	115 - 137 g	122.6 g	Yes
Peak Head Longitudinal Acceleration	(-15) - 15 g	-5.0 g	Yes
Is Head Resultant Acceleration Curve Unimodal within 15% of Peak?	< 15 %	2.20 %	Yes

**Test meets specifications.**

**Condition: Used**

**Comments:**

**Head Skin S/N: 1253**

Specification Source: CFR49 Part 572 Subpart V  
with Polarity in accordance with J211

11.04.2019 07:13:20 196




## Transportation Research Center Inc.

Left Lateral Head Drop

SID IIs Serial No. 305 Certification No. 76-2


Test Date: 11/4/2019

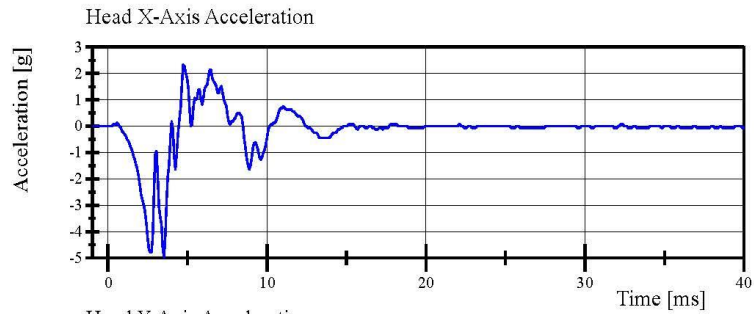

Filter Class: CFC\_1000

Max: 2.3 g at 4.7 ms


Min: -5.0 g at 3.5 ms

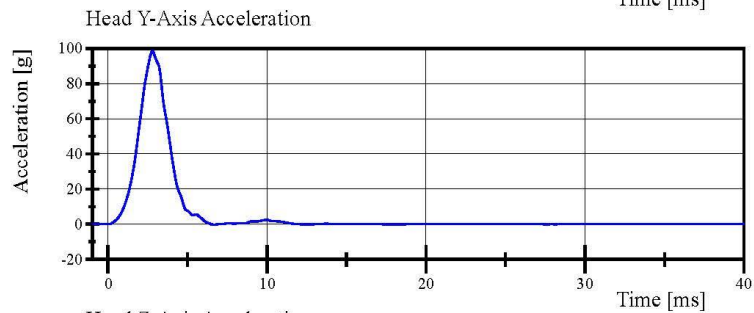

Filter Class: CFC\_1000

Max: 98.6 g at 2.8 ms


Min: -0.2 g at 6.6 ms

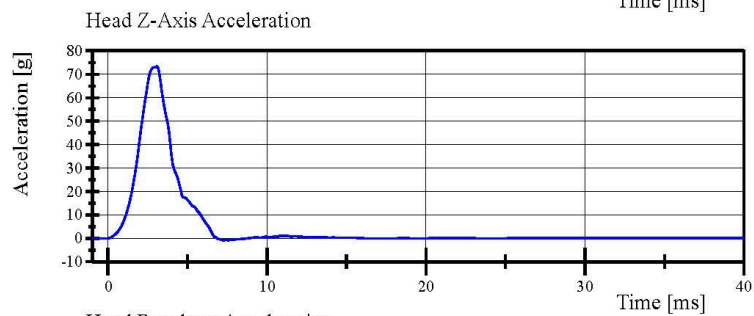

Filter Class: CFC\_1000

Max: 73.4 g at 3.0 ms

Min: -0.8 g at 7.2 ms

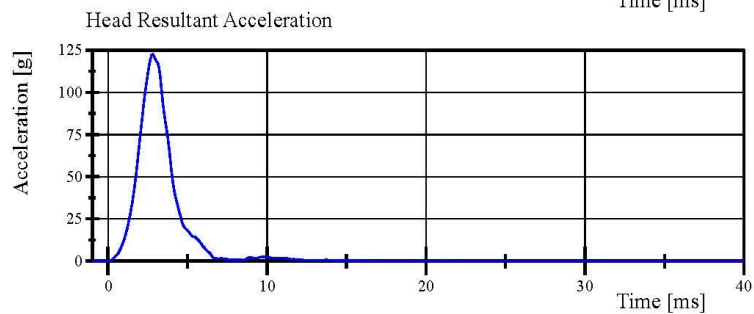

Filter Class: CFC\_1000

Max: 122.6 g at 2.8 ms

Min: 0.0 g at -1.0 ms

Specification Source: CFR49 Part 572 Subpart V  
with Polarity in accordance with J211

11.04.2019 07:13:49 196



## Transportation Research Center Inc.

Left Lateral Neck

SID IIs Serial No. 305 Certification No. 76-3

Test Date: 11/4/2019

Test Parameter	Specification	Test Results	Pass
Temperature	20.6 - 22.2 °C	21.6 °C	Yes
Relative Humidity	10 - 70 %	39 %	Yes
Pendulum Velocity	(-5.51) - (-5.63) m/s	-5.599 m/s	Yes
Pendulum Integrated Velocity			
Change at 10 ms	2.20 - 2.80 m/s	2.524 m/s	Yes
Change at 15 ms	3.30 - 4.10 m/s	3.680 m/s	Yes
Change at 20 ms	4.40 - 5.40 m/s	5.025 m/s	Yes
Change at 25 ms	5.40 - 6.10 m/s	5.911 m/s	Yes
Change at 25 to 100 ms	5.50 - 6.20 m/s	5.932 m/s	Yes
Maximum Headform Flexion occurring between 50ms and 70ms.			
Peak	(-71) - (-81) deg	-74.5 deg	Yes
Time of Peak	50 - 70 ms	67.5 ms	Yes
Total Neck Occipital Condyles Moment	36 - 44 N·m	42.6 N·m	Yes
Total Neck Occipital Condyles Moment			
Decay Time to 0 N·m	102 - 126 ms	120.6 ms	Yes

**Test meets specifications.**

**Condition:** Used

**Comments:**

**Neck S/N: 180-2001-606**

Specification Source: CFR49 Part 572 Subpart V  
with Polarity in accordance with J211

11.04.2019 10:52:07 718




## Transportation Research Center Inc.

Left Lateral Neck

SID IIs Serial No. 305 Certification No. 76-3


Test Date: 11/4/2019

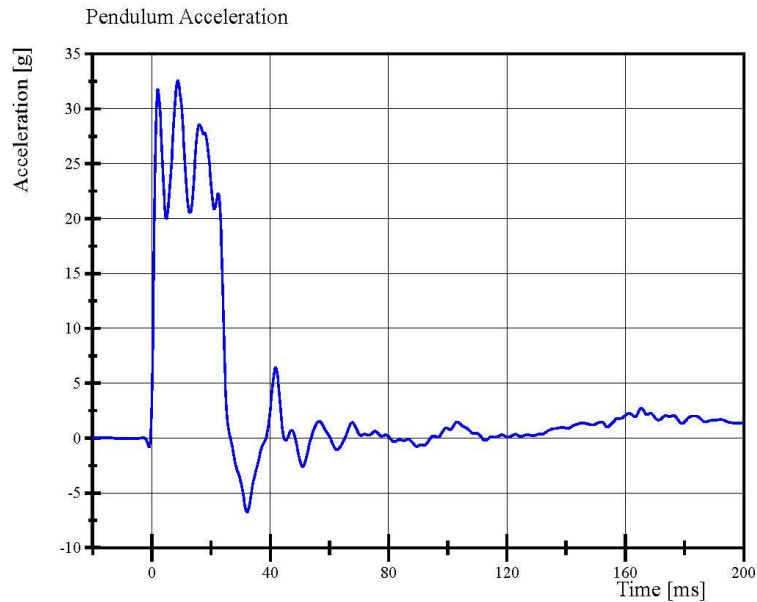

Filter Class: CFC\_180

Max: 32.6 g at 8.7 ms

Min: -6.7 g at 32.2 ms

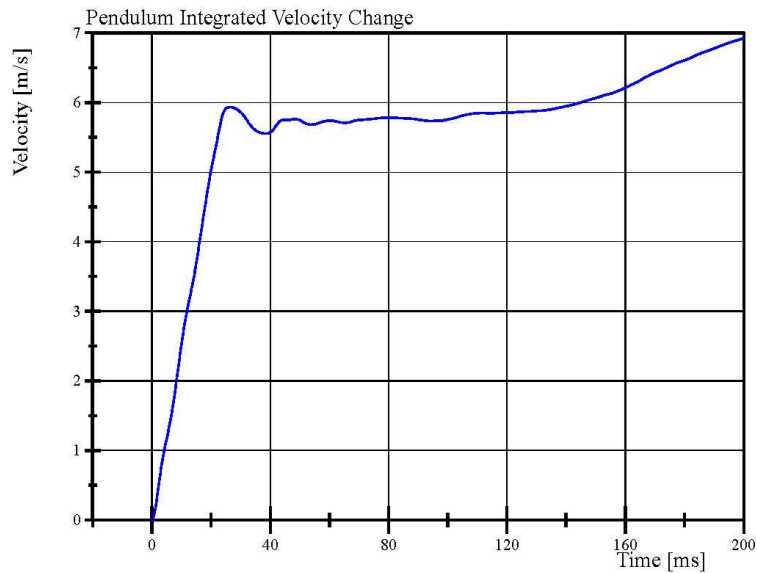

Filter Class: CFC\_180

Max: 6.9 m/s at 200.0 ms

Min: 0.0 m/s at 0.0 ms

Specification Source: CFR49 Part 572 Subpart V  
with Polarity in accordance with J211

11.04.2019 10:53:18 718






## Transportation Research Center Inc.


Left Lateral Neck

SID IIS Serial No. 305 Certification No. 76-3


Test Date: 11/4/2019

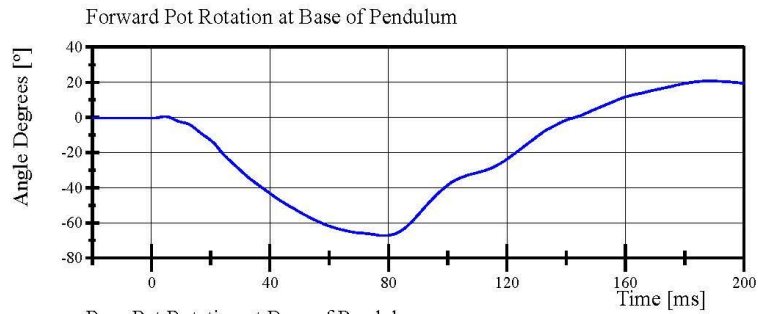


Filter Class: CFC\_60  
Max: 20.8 ° at 188.2 ms  
Min: -67.3 ° at 78.6 ms

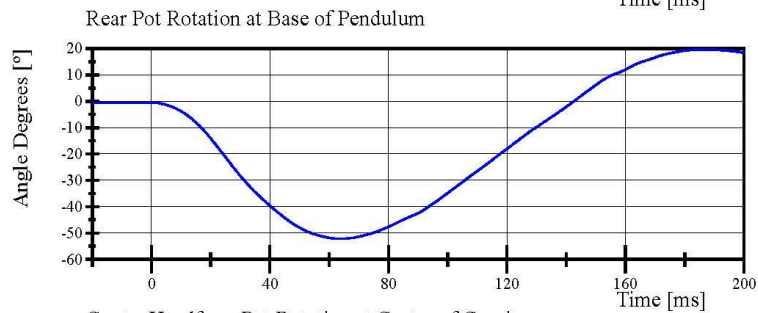

Filter Class: CFC\_60  
Max: 19.6 ° at 187.3 ms  
Min: -52.2 ° at 63.9 ms

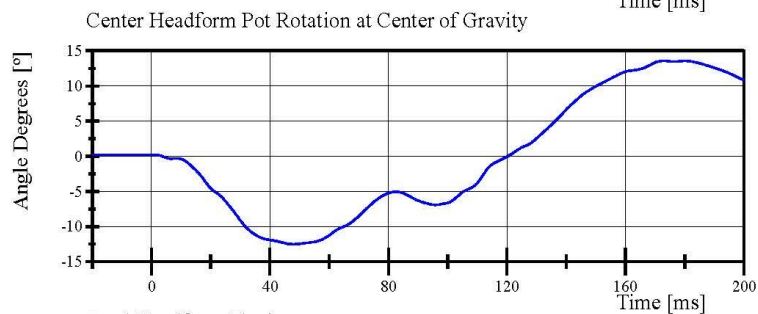

Filter Class: CFC\_60  
Max: 13.6 ° at 173.0 ms  
Min: -12.5 ° at 47.8 ms

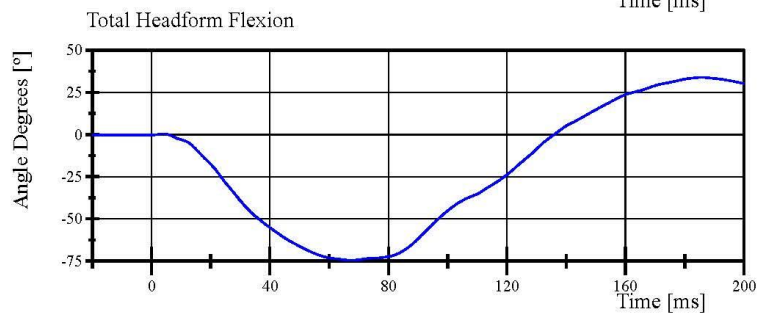

Filter Class: CFC\_60  
Max: 33.8 ° at 185.8 ms  
Min: -74.5 ° at 67.5 ms

Specification Source: CFR49 Part 572 Subpart V  
with Polarity in accordance with J211

11.04.2019 10:53:18 718




## Transportation Research Center Inc.


Left Lateral Neck

SID IIS Serial No. 305 Certification No. 76-3


Test Date: 11/4/2019

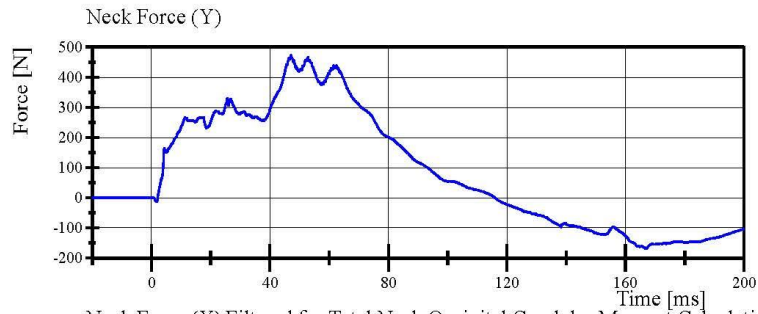


Filter Class: CFC\_1000  
Max: 473.2 N at 47.1 ms  
Min: -167.9 N at 166.7 ms

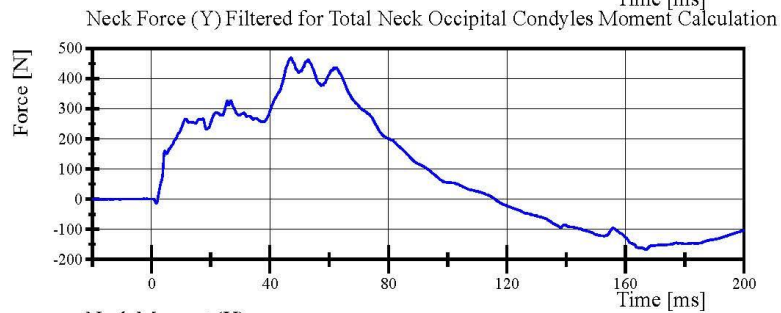

Filter Class: CFC\_600  
Max: 469.4 N at 47.1 ms  
Min: -167.8 N at 167.0 ms

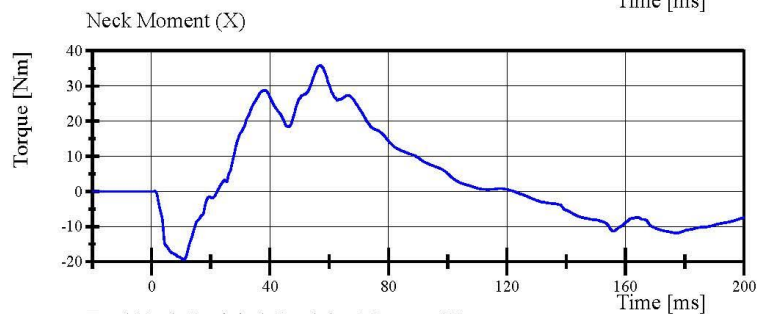

Filter Class: CFC\_600  
Max: 35.9 Nm at 57.1 ms  
Min: -19.4 Nm at 11.0 ms

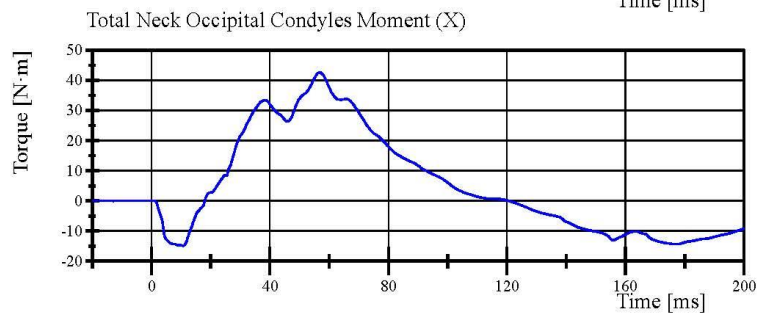

Filter Class: Without\_(Constar  
Max: 42.6 N·m at 57.0 ms  
Min: -14.9 N·m at 10.7 ms

Specification Source: CFR49 Part 572 Subpart V  
with Polarity in accordance with J211

11.04.2019 10:53:19 718



## Transportation Research Center Inc.

Left Lateral Shoulder  
SID IIs Serial No. 305 Certification No. 76-1  
Test Date: 11/1/2019

Test Parameter	Specification	Test Results	Pass
Temperature	20.6 - 22.2 °C	21.4 °C	Yes
Relative Humidity	10 - 70 %	37 %	Yes
Impactor Velocity	4.2 - 4.4 m/s	4.35 m/s	Yes
Impactor Acceleration	(-13) - (-18) g	-15.8 g	Yes
Shoulder Displacement	28 - 37 mm	34.1 mm	Yes
Upper Spine Lateral Acceleration	17 - 22 g	17.7 g	Yes

**Test meets specifications.**

**Condition: Used**

**Comments:**

**Left Arm S/N: 952**


Specification Source: CFR49 Part 572 Subpart V  
with Polarity in accordance with J211

11.01.2019 10:46:01 926




## Transportation Research Center Inc.


Left Lateral Shoulder  
SID IIs Serial No. 305 Certification No. 76-1  
Test Date: 11/1/2019

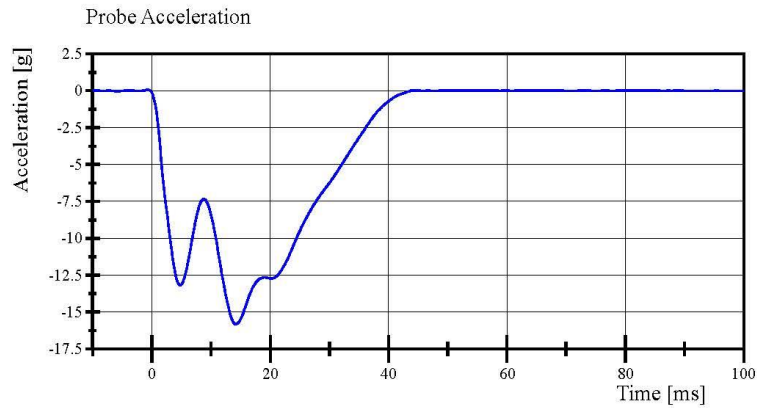

Filter Class: CFC\_180  
Max: 0.1 g at -0.7 ms  
Min: -15.8 g at 14.2 ms

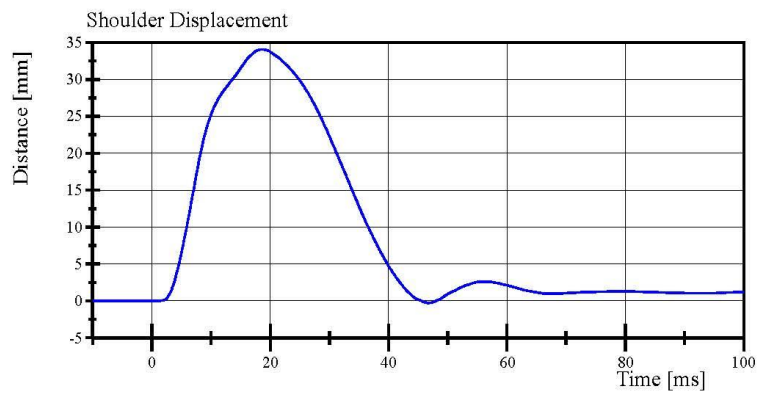

Filter Class: CFC\_600  
Max: 34.1 mm at 18.6 ms  
Min: -0.3 mm at 46.8 ms

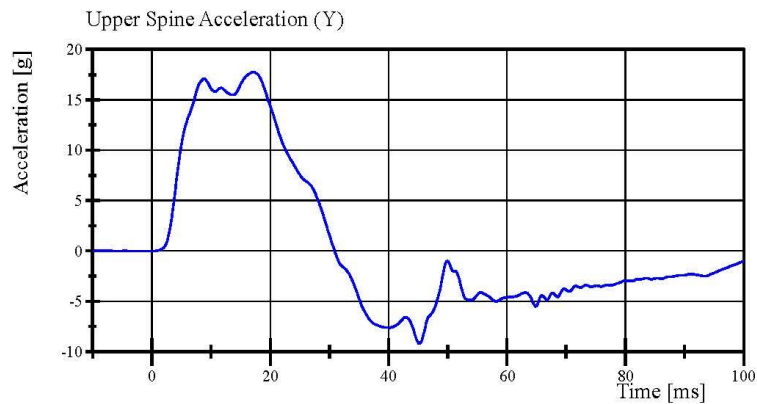

Filter Class: CFC\_180  
Max: 17.7 g at 17.1 ms  
Min: -9.2 g at 45.2 ms

Specification Source: CFR49 Part 572 Subpart V  
with Polarity in accordance with J211

11.01.2019 10:46:43 926



## Transportation Research Center Inc.

Left Lateral Thorax with Arm  
SID IIs Serial No. 305 Certification No. 76-1  
Test Date: 11/1/2019

Test Parameter	Specification	Test Results	Pass
Temperature	20.6 - 22.2 °C	21.6 °C	Yes
Relative Humidity	10 - 70 %	34 %	Yes
Impactor Velocity	6.60 - 6.80 m/s	6.730 m/s	Yes
Impactor Acceleration	(-30) - (-36) g	-33.4 g	Yes
Shoulder Displacement	31 - 40 mm	36.9 mm	Yes
Upper Thorax Rib Displacement	25 - 32 mm	28.2 mm	Yes
Center Thorax Rib Displacement	30 - 36 mm	33.0 mm	Yes
Lower Thorax Rib Displacement	32 - 38 mm	36.4 mm	Yes
Upper Spine Lateral Acceleration	34 - 43 g	37.4 g	Yes
Lower Spine Lateral Acceleration	29 - 37 g	32.8 g	Yes

**Test meets specifications.**

**Condition:** Used

**Comments:**

**Left Arm S/N:** 952

**Shoulder Rib S/N:** 180-3355 DM4450

**Upper Thorax Rib S/N:** 2135

**Middle Thorax Rib S/N:** 2136

**Lower Thorax Rib S/N:** 2137

Specification Source: CFR49 Part 572 Subpart V  
with Polarity in accordance with J211




11.01.2019 12:13:40 572





## Transportation Research Center Inc.

Left Lateral Thorax with Arm  
SID IIs Serial No. 305 Certification No. 76-1  
Test Date: 11/1/2019

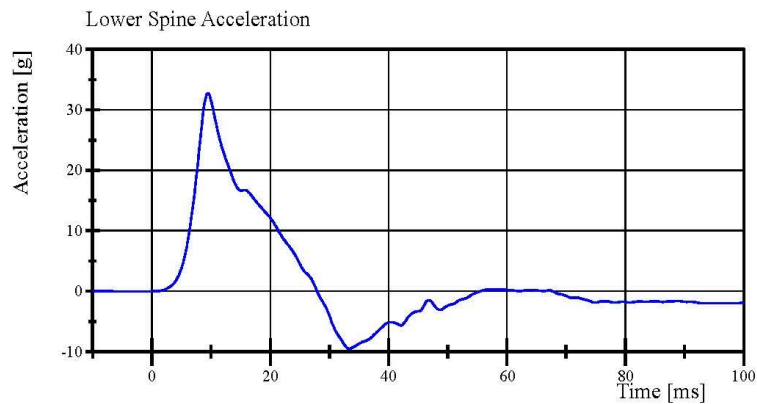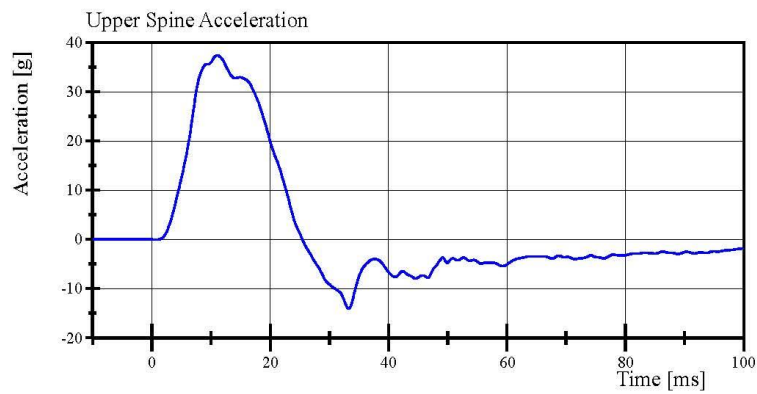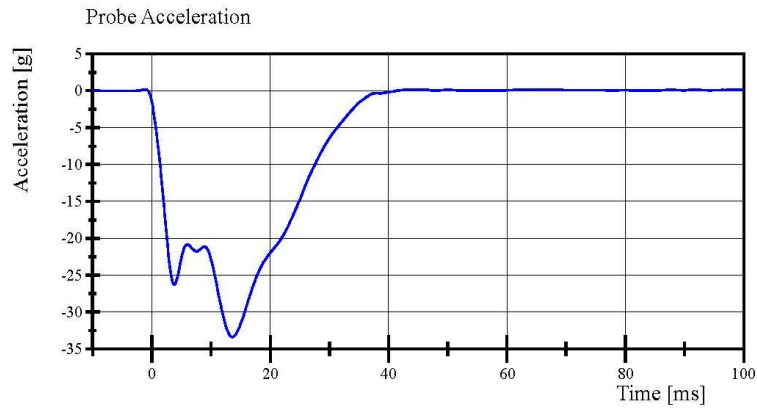





Specification Source: CFR49 Part 572 Subpart V  
with Polarity in accordance with J211

11.01.2019 12:14:37 572



## Transportation Research Center Inc.

Left Lateral Thorax with Arm  
SID IIs Serial No. 305 Certification No. 76-1  
Test Date: 11/1/2019

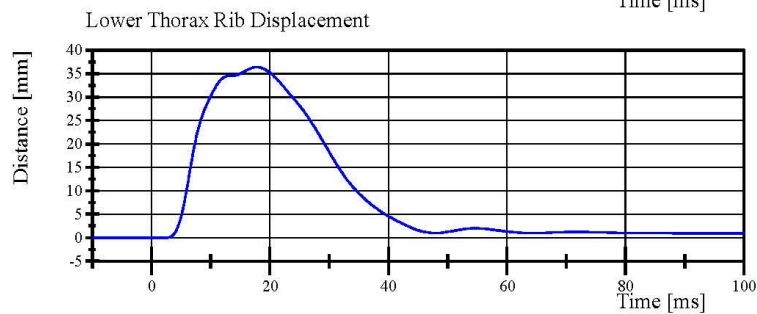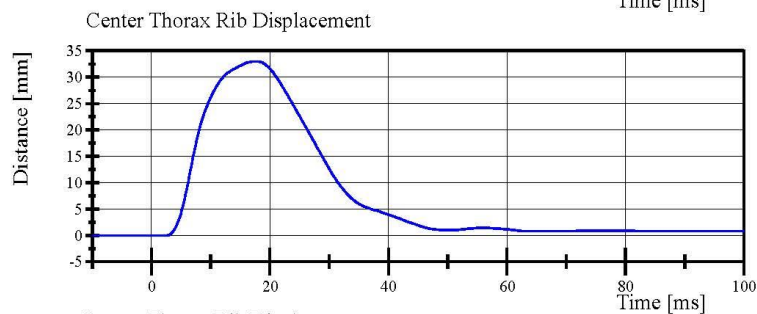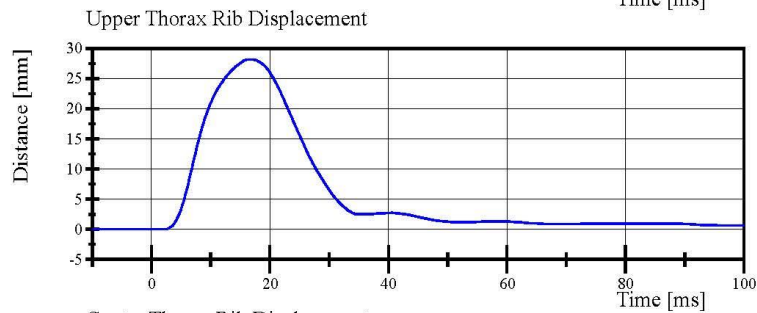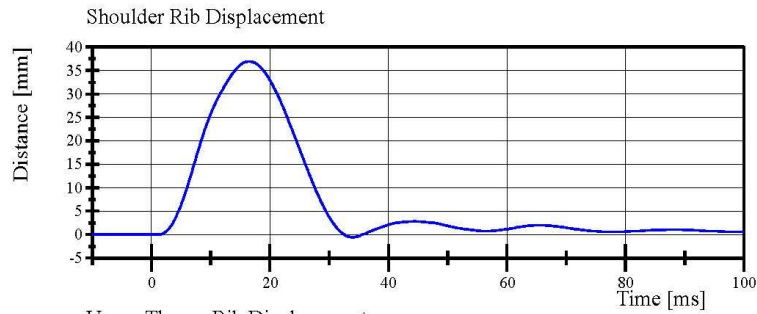

Specification Source: CFR49 Part 572 Subpart V  
with Polarity in accordance with J211

11.01.2019 12:14:37 572



## Transportation Research Center Inc.

Left Lateral Thorax without Arm  
SID IIs Serial No. 305 Certification No. 76-1  
Test Date: 11/1/2019

Test Parameter	Specification	Test Results	Pass
Temperature	20.6 - 22.2 °C	21.6 °C	Yes
Relative Humidity	10 - 70 %	36 %	Yes
Impactor Velocity	4.20 - 4.40 m/s	4.277 m/s	Yes
Impactor Acceleration	(-14) - (-18) g	-15.2 g	Yes
Upper Thorax Rib Displacement	32 - 40 mm	35.9 mm	Yes
Center Thorax Rib Displacement	39 - 45 mm	40.9 mm	Yes
Lower Thorax Rib Displacement	35 - 43 mm	37.3 mm	Yes
Upper Spine Lateral Acceleration	13 - 17 g	14.9 g	Yes
Lower Spine Lateral Acceleration	7 - 11 g	8.6 g	Yes

**Test meets specifications.**

**Condition:** Used

**Comments:**

**Upper Thorax Rib S/N: 2135**

**Middle Thorax Rib S/N: 2136**

**Lower Thorax Rib S/N: 2137**


Specification Source: CFR49 Part 572 Subpart V  
with Polarity in accordance with J211

11.01.2019 11:49:40 788




## Transportation Research Center Inc.


Left Lateral Thorax without Arm  
SID IIs Serial No. 305 Certification No. 76-1  
Test Date: 11/1/2019

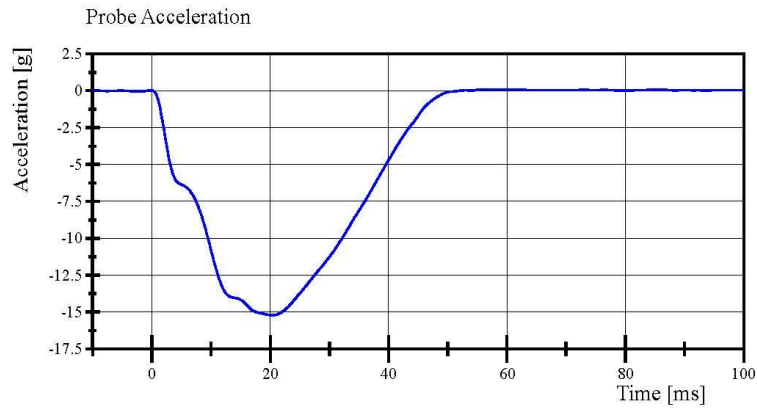

Filter Class: CFC\_180  
Max: 0.1 g at 61.4 ms  
Min: -15.2 g at 20.3 ms

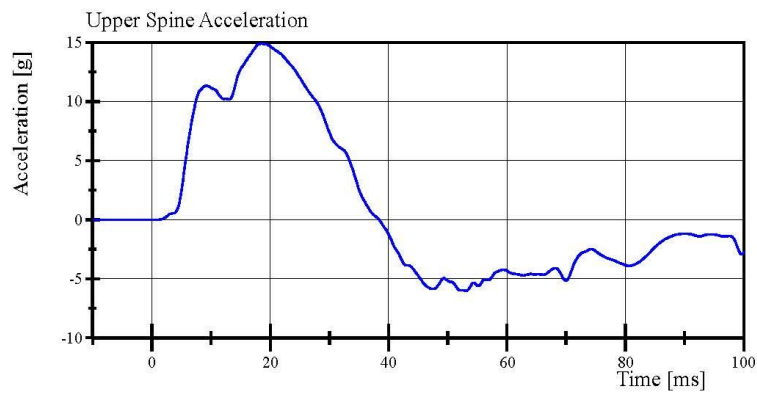

Filter Class: CFC\_180  
Max: 14.9 g at 18.6 ms  
Min: -6.0 g at 53.0 ms

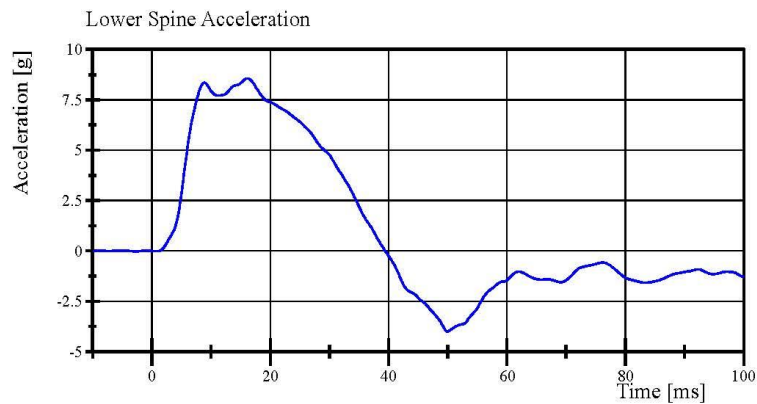

Filter Class: CFC\_180  
Max: 8.6 g at 16.1 ms  
Min: -4.0 g at 50.0 ms


Specification Source: CFR49 Part 572 Subpart V  
with Polarity in accordance with J211

11.01.2019 11:50:37 788




## Transportation Research Center Inc.


Left Lateral Thorax without Arm  
SID IIs Serial No. 305 Certification No. 76-1  
Test Date: 11/1/2019

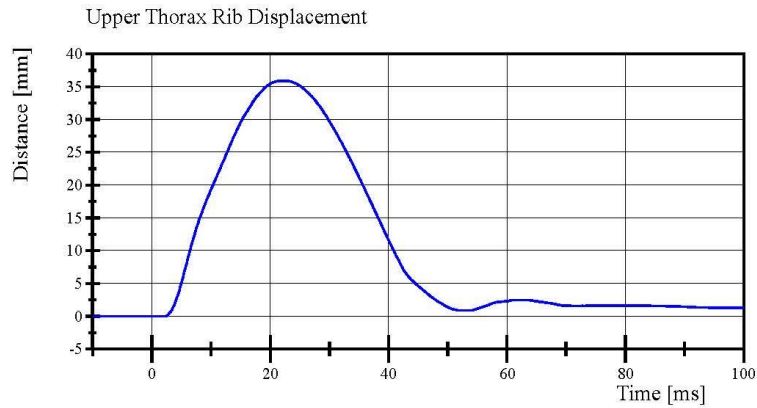

Filter Class: CFC\_600  
Max: 35.9 mm at 21.9 ms  
Min: -0.0 mm at 2.2 ms

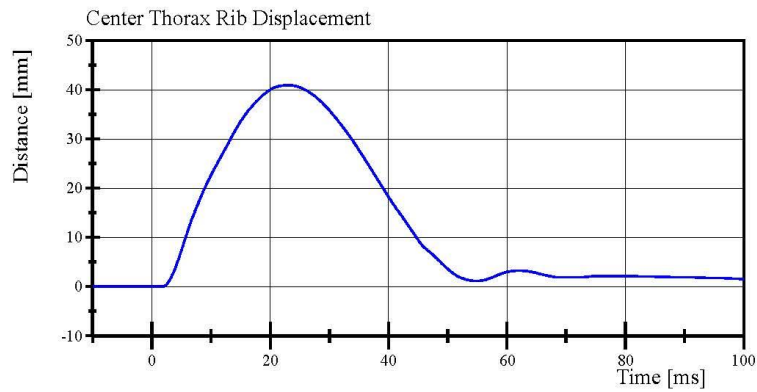

Filter Class: CFC\_600  
Max: 40.9 mm at 22.9 ms  
Min: -0.0 mm at 1.8 ms

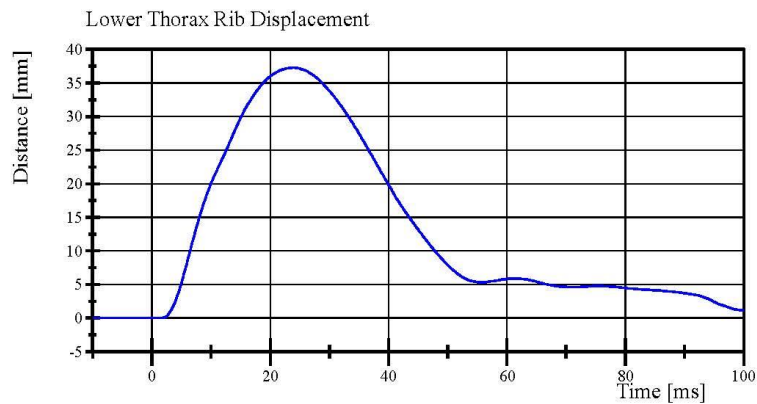

Filter Class: CFC\_600  
Max: 37.3 mm at 23.9 ms  
Min: -0.0 mm at 1.4 ms

Specification Source: CFR49 Part 572 Subpart V  
with Polarity in accordance with J211

11.01.2019 11:50:37 788





## Transportation Research Center Inc.

Left Lateral Abdomen  
SID IIs Serial No. 305 Certification No. 76-2  
Test Date: 11/1/2019

Test Parameter	Specification	Test Results	Pass
Temperature	20.6 - 22.2 °C	21.5 °C	Yes
Relative Humidity	10 - 70 %	36 %	Yes
Impactor Velocity	4.2 - 4.4 m/s	4.28 m/s	Yes
Impactor Acceleration	(-12) - (-16) g	-13.2 g	Yes
Upper Abdominal Rib Displacement	36 - 47 mm	45.7 mm	Yes
Lower Abdominal Rib Displacement	33 - 44 mm	41.5 mm	Yes
Lower Spine Lateral Acceleration	9 - 14.0 g	9.81 g	Yes

**Test meets specifications.**

**Condition:** Used

**Comments:**

**Upper Abdominal Rib S/N: 1997**


**Lower Abdominal Rib S/N: DS1234**

## Transportation Research Center Inc.

Left Lateral Abdomen

SID IIs Serial No. 305 Certification No. 76-2


Test Date: 11/1/2019

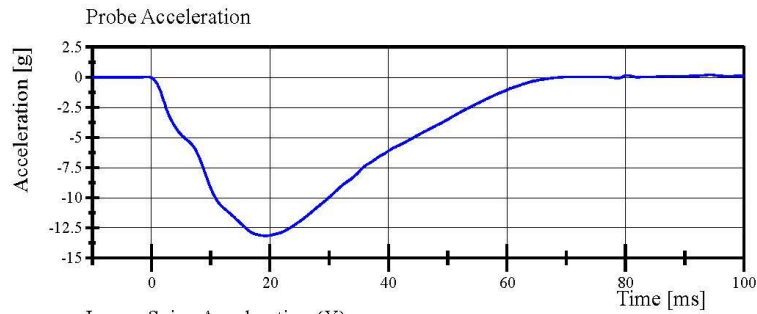

Filter Class: CFC\_180

Max: 0.2 g at 94.4 ms


Min: -13.2 g at 19.3 ms

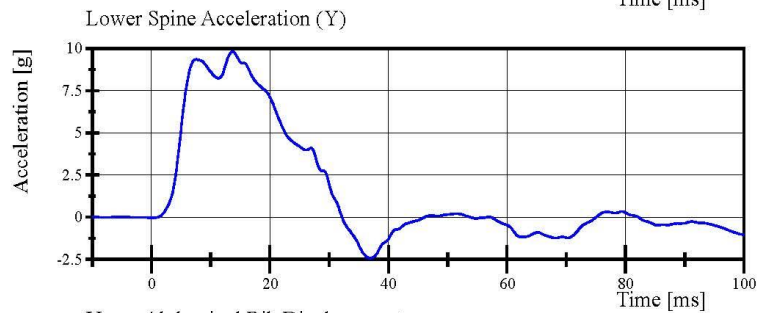

Filter Class: CFC\_180

Max: 9.8 g at 13.7 ms


Min: -2.4 g at 37.0 ms

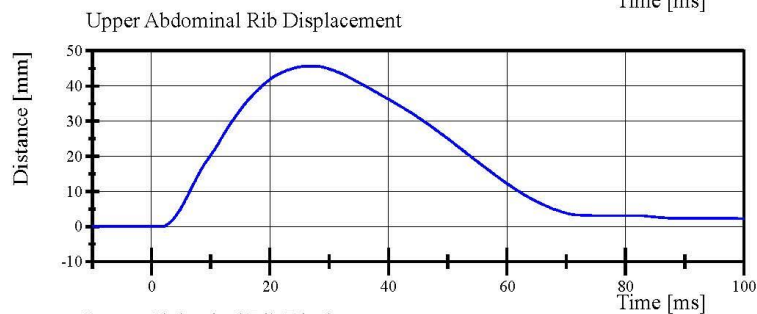

Filter Class: CFC\_600

Max: 45.7 mm at 26.6 ms

Min: -0.0 mm at 1.8 ms

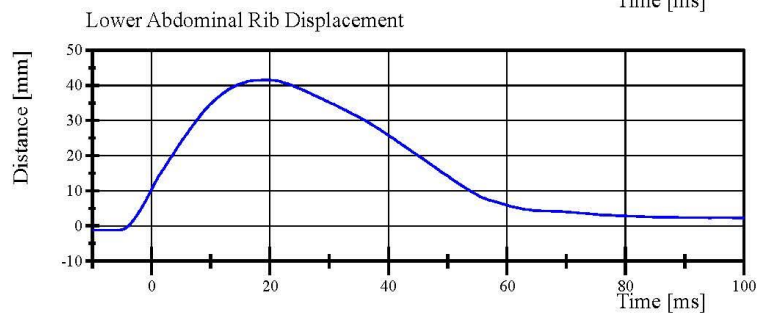

Filter Class: CFC\_600

Max: 41.5 mm at 19.4 ms

Min: -1.2 mm at -7.8 ms

Specification Source: CFR49 Part 572 Subpart V  
with Polarity in accordance with J211

11.01.2019 13:31:31 792



## Transportation Research Center Inc.

Left Lateral Pelvis  
SID IIs Serial No. 305 Certification No. 76-1  
Test Date: 11/1/2019

Test Parameter	Specification	Test Results	Pass
Temperature	20.6 - 22.2 °C	21.6 °C	Yes
Relative Humidity	10 - 70 %	34 %	Yes
Pendulum Velocity	6.6 - 6.8 m/s	6.62 m/s	Yes
Impactor Acceleration	(-38.0) - (-47.0) g	-43.16 g	Yes
Peak Pelvis Lateral Acceleration after 6ms	34 - 42 g	39.4 g	Yes
Acetabulum Force	3,600 - 4,300 N	4,206.9 N	Yes

**Test meets specifications.**

**Condition: Used**

**Comments:**

**Pelvis Skin S/N: 884**

**Pelvis Plug Info:**

**Manufacturer: SACO**

**S/N: 12550**

**Cal Date: 20181002**




Specification Source: CFR49 Part 572 Subpart V  
with Polarity in accordance with J211

11.01.2019 13:42:04 443



## Transportation Research Center Inc.

Left Lateral Pelvis  
SID IIs Serial No. 305 Certification No. 76-1  
Test Date: 11/1/2019

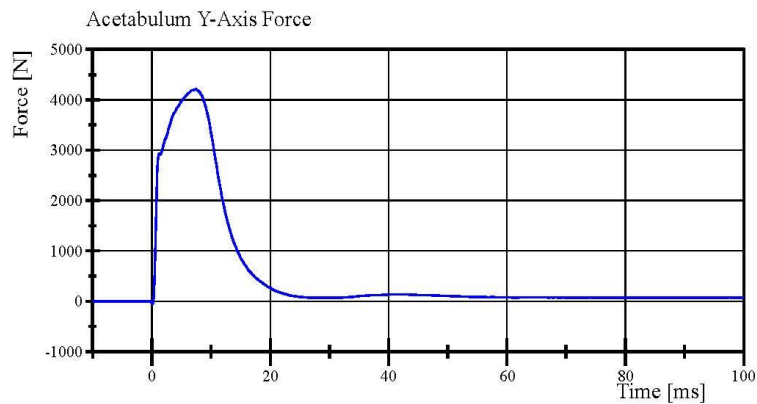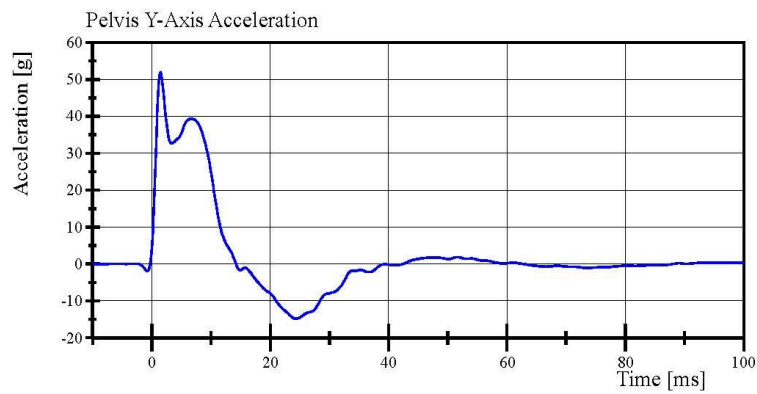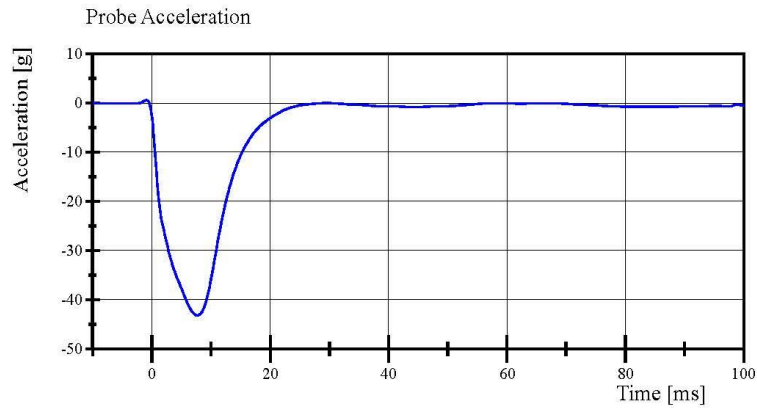

Specification Source: CFR49 Part 572 Subpart V  
with Polarity in accordance with J211

11.01.2019 13:43:22 443



## Transportation Research Center Inc.

Left Lateral Iliac

SID IIs Serial No. 305 Certification No. 76-1

Test Date: 11/1/2019

Test Parameter	Specification	Test Results	Pass
Temperature	20.6 - 22.2 °C	21.6 °C	Yes
Relative Humidity	10 - 70 %	36 %	Yes
Pendulum Velocity	4.2 - 4.4 m/s	4.28 m/s	Yes
Impactor Acceleration	(-36) - (-45) g	-40.8 g	Yes
Peak Pelvis Lateral Acceleration	28 - 39 g	32.9 g	Yes
Iliac Force	4,100 - 5,100 N	4,934.9 N	Yes

**Test meets specifications.**

**Condition: Used**

**Comments:**

**Pelvis Skin S/N: 884**

Specification Source: CFR49 Part 572 Subpart V  
with Polarity in accordance with J211

11.01.2019 08:53:42 652






## Transportation Research Center Inc.

Left Lateral Iliac

SID IIs Serial No. 305 Certification No. 76-1


Test Date: 11/1/2019

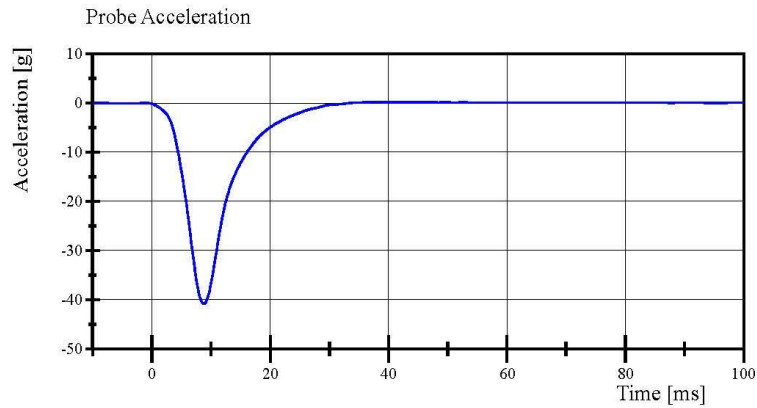

Filter Class: CFC\_180

Max: 0.2 g at 38.2 ms


Min: -40.8 g at 8.8 ms

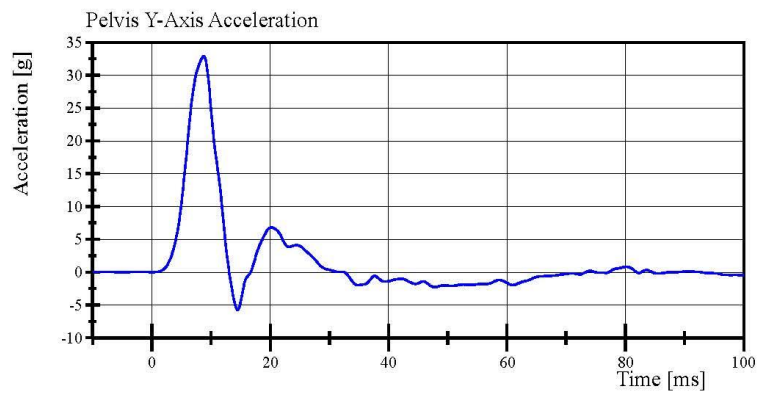

Filter Class: CFC\_180

Max: 32.9 g at 8.7 ms

Min: -5.7 g at 14.5 ms

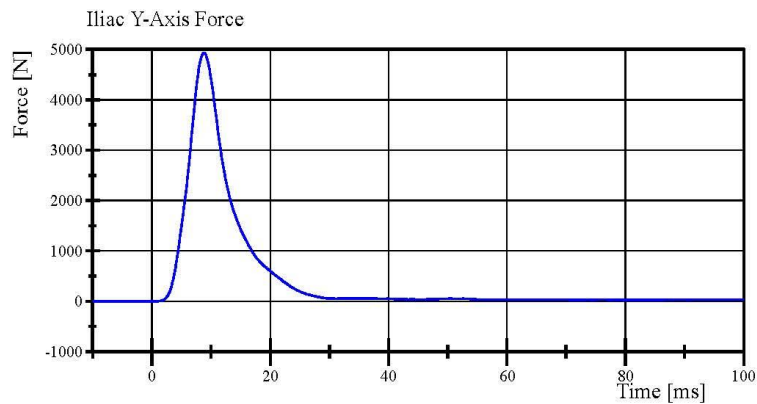

Filter Class: CFC\_600

Max: 4,934.9 N at 8.8 ms

Min: -0.6 N at -5.0 ms

Specification Source: CFR49 Part 572 Subpart V  
with Polarity in accordance with J211

11.01.2019 08:54:42 652



**Post-Test Calibration Sheets**  
**Passenger S/N 305**

**Transportation Research Center Inc.**  
**SIDIIs Dummy - Level D**  
**External Dimensions**  
**Serial No. 305 Calibration No. 77**

Symbol	Description	Specification	Results	Pass
		mm	mm	
A	Sitting Height	772.0 - 788.0	780	Yes
B	Shoulder Pivot Height	437.0 - 453.0	448	Yes
C	H-Point Height	79.0 - 89.0	86	Yes
D	H-Point from Seat Back	141.0 - 151.0	146	Yes
E	Shoulder Pivot from Backline	97.0 - 107.0	100	Yes
F	Thigh Clearance	119.0 - 135.0	130	Yes
G	Head Breadth	140.0 - 148.0	145	Yes
H	Head Back from Backline	40.0 - 46.0	44	Yes
I	Head Depth	178.0 - 188.0	185	Yes
J	Head Circumference	541.0 - 551.0	543	Yes
K	Buttock to Knee Length	514.0 - 540.0	532	Yes
L	Popliteal Height	343.0 - 369.0	349	Yes
M	Knee Pivot to Floor Height	393.0 - 409.0	397	Yes
N	Buttock Popliteal Length	416.0 - 442.0	434	Yes
O	Chest Depth without Jacket	195.0 - 211.0	197	Yes
P	Foot Length (right)	216.0 - 232.0	222	Yes
P	Foot Length (left)	216.0 - 232.0	220	Yes
Q	Hip Breadth	313.0 - 323.0	320	Yes
R	Arm Length	249.0 - 259.0	253	Yes
S	Knee Joint to seat Back	478.0 - 493.0	483	Yes
V	Shoulder Width (only one arm installed)	341.0 - 357.0	350	Yes
W	Foot Width (right)	78.0 - 94.0	85	Yes
W	Foot Width (left)	78.0 - 94.0	85	Yes
Y	Chest Circumference with Jacket	851.0 - 881.0	878	Yes
Z	Waist Circumference	761.0 - 791.0	780	Yes

## Transportation Research Center Inc.

Left Lateral Head Drop

SID IIs Serial No. 305 Certification No. 77-1

Test Date: 12/5/2019

Test Parameter	Specification	Test Results	Pass
Temperature	18.9 - 25.6 °C	21.3 °C	Yes
Relative Humidity	10 - 70 %	40 %	Yes
Peak Head Resultant Acceleration	115 - 137 g	123.0 g	Yes
Peak Head Longitudinal Acceleration	(-15) - 15 g	-4.1 g	Yes
Is Head Resultant Acceleration Curve Unimodal within 15% of Peak?	< 15 %	1.35 %	Yes

**Test meets specifications.**

**Condition: Used**

**Comments:**


**Head Skin S/N: 1253**

## Transportation Research Center Inc.

Left Lateral Head Drop

SID IIs Serial No. 305 Certification No. 77-1


Test Date: 12/5/2019

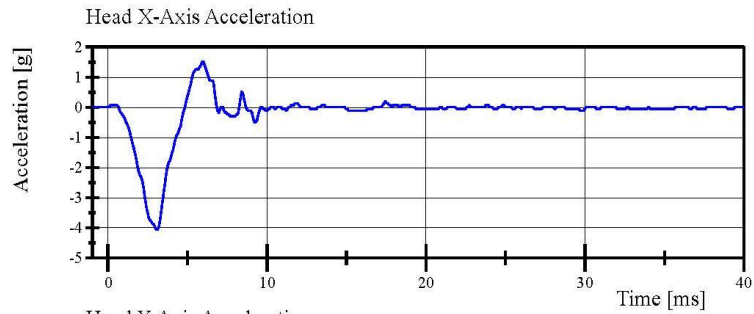

Filter Class: CFC\_1000

Max: 1.5 g at 5.9 ms


Min: -4.1 g at 3.0 ms

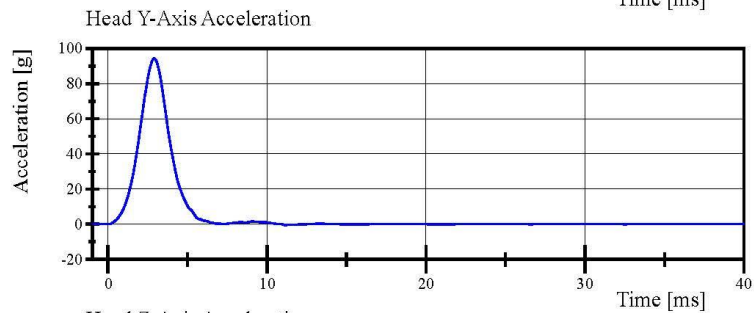

Filter Class: CFC\_1000

Max: 94.4 g at 2.9 ms


Min: -0.4 g at 11.1 ms

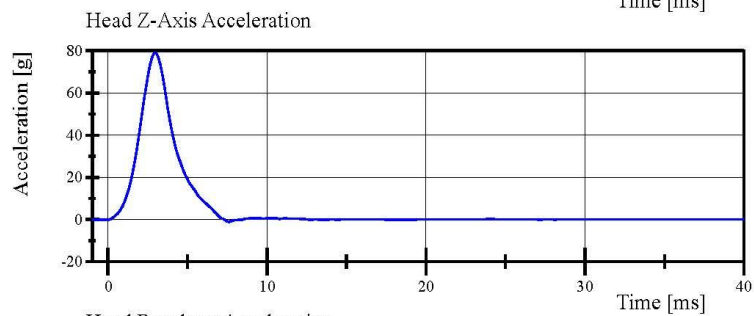

Filter Class: CFC\_1000

Max: 79.1 g at 3.0 ms

Min: -1.1 g at 7.6 ms

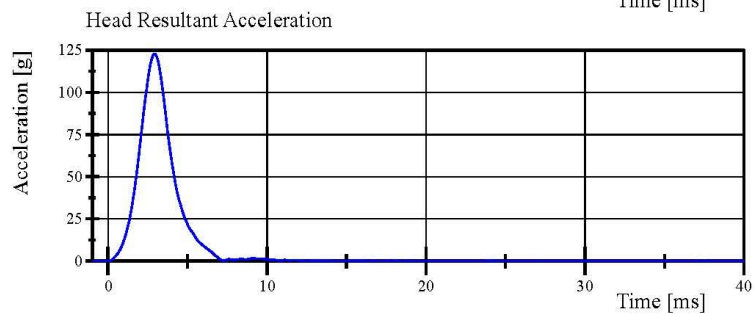

Filter Class: CFC\_1000

Max: 123.0 g at 2.9 ms

Min: 0.0 g at -1.0 ms

Specification Source: CFR49 Part 572 Subpart V  
with Polarity in accordance with J211

12.05.2019 13:19:25 196





## Transportation Research Center Inc.

Left Lateral Neck

SID IIs Serial No. 305 Certification No. 77-1

Test Date: 12/5/2019

Test Parameter	Specification	Test Results	Pass
Temperature	20.6 - 22.2 °C	21.4 °C	Yes
Relative Humidity	10 - 70 %	38 %	Yes
Pendulum Velocity	(-5.51) - (-5.63) m/s	-5.599 m/s	Yes
Pendulum Integrated Velocity Change at 10 ms	2.20 - 2.80 m/s	2.547 m/s	Yes
Change at 15 ms	3.30 - 4.10 m/s	3.750 m/s	Yes
Change at 20 ms	4.40 - 5.40 m/s	5.031 m/s	Yes
Change at 25 ms	5.40 - 6.10 m/s	5.888 m/s	Yes
Change at 25 to 100 ms	5.50 - 6.20 m/s	5.907 m/s	Yes
Maximum Headform Flexion occurring between 50ms and 70ms.			
Peak	(-71) - (-81) deg	-76.6 deg	Yes
Time of Peak	50 - 70 ms	60.6 ms	Yes
Total Neck Occipital Condyles Moment	36 - 44 N·m	42.3 N·m	Yes
Total Neck Occipital Condyles Moment Decay Time to 0 N·m	102 - 126 ms	119.4 ms	Yes

**Test meets specifications.**

**Condition:** Used

**Comments:**

**Neck S/N: 180-2001-606**

Specification Source: CFR49 Part 572 Subpart V  
with Polarity in accordance with J211

Page 11 of 31

12.05.2019 13:48:43 718




## Transportation Research Center Inc.

Left Lateral Neck

SID IIs Serial No. 305 Certification No. 77-1


Test Date: 12/5/2019

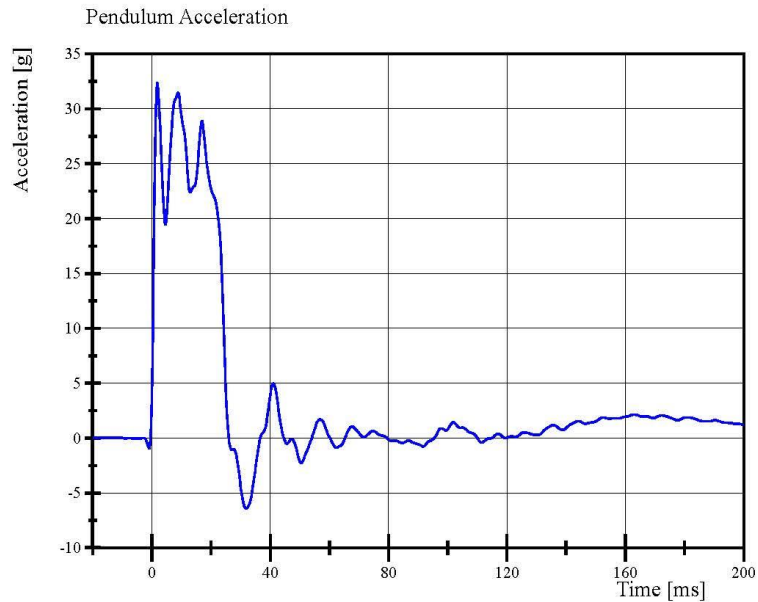

Filter Class: CFC\_180

Max: 32.4 g at 1.8 ms

Min: -6.4 g at 31.8 ms

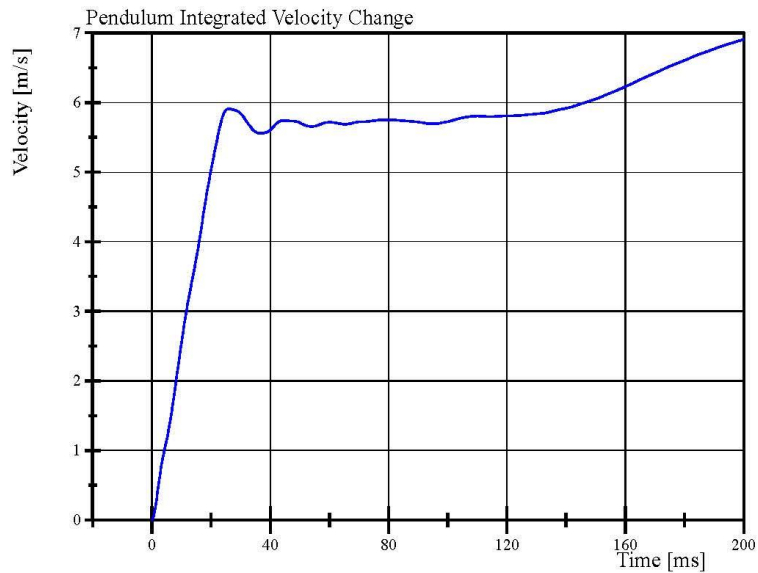

Filter Class: CFC\_180

Max: 6.9 m/s at 200.0 ms

Min: 0.0 m/s at 0.0 ms

Specification Source: CFR49 Part 572 Subpart V  
with Polarity in accordance with J211

12.05.2019 13:49:23 718




## Transportation Research Center Inc.


Left Lateral Neck

SID IIs Serial No. 305 Certification No. 77-1


Test Date: 12/5/2019

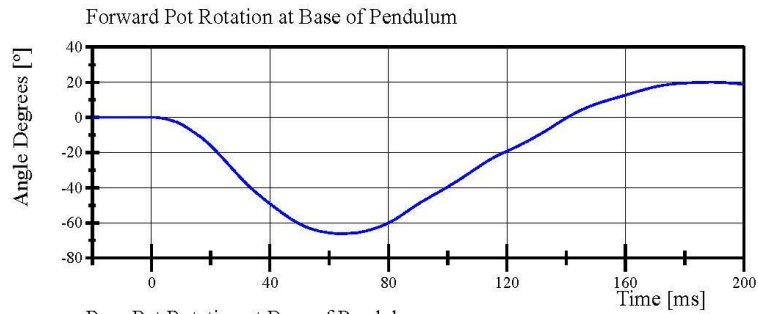


Filter Class: CFC\_60  
Max: 20.1 ° at 189.1 ms  
Min: -66.1 ° at 63.9 ms

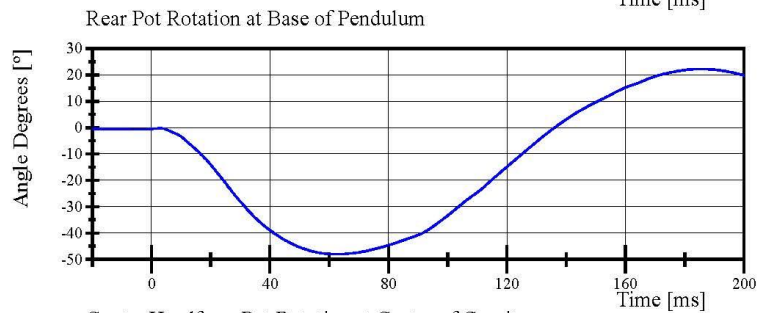

Filter Class: CFC\_60  
Max: 22.2 ° at 185.3 ms  
Min: -48.1 ° at 62.5 ms

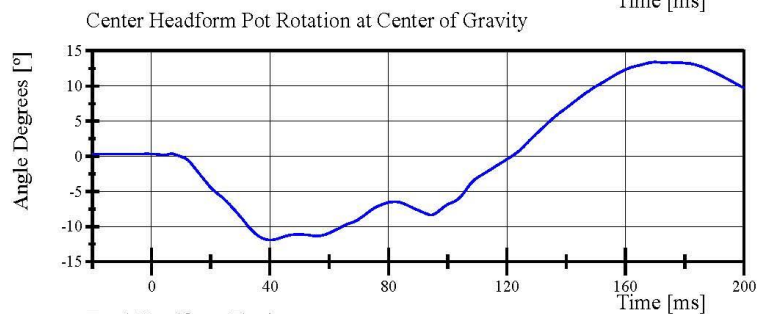

Filter Class: CFC\_60  
Max: 13.4 ° at 170.0 ms  
Min: -11.9 ° at 40.2 ms

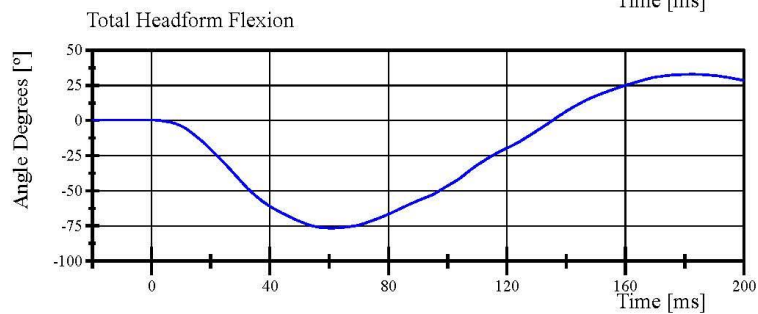

Filter Class: CFC\_60  
Max: 32.9 ° at 182.6 ms  
Min: -76.6 ° at 60.6 ms

Specification Source: CFR49 Part 572 Subpart V  
with Polarity in accordance with J211

12.05.2019 13:49:23 718




## Transportation Research Center Inc.


Left Lateral Neck

SID IIS Serial No. 305 Certification No. 77-1


Test Date: 12/5/2019

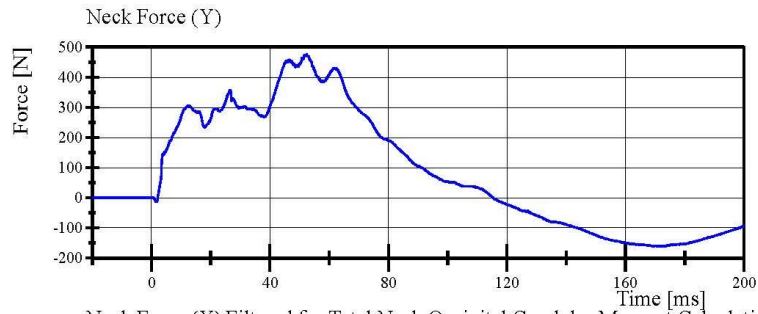


Filter Class: CFC\_1000  
Max: 476.0 N at 52.3 ms  
Min: -161.0 N at 172.2 ms

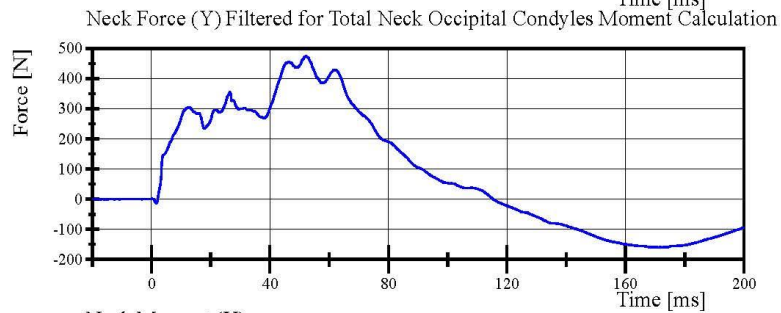

Filter Class: CFC\_600  
Max: 474.4 N at 52.2 ms  
Min: -160.7 N at 172.3 ms

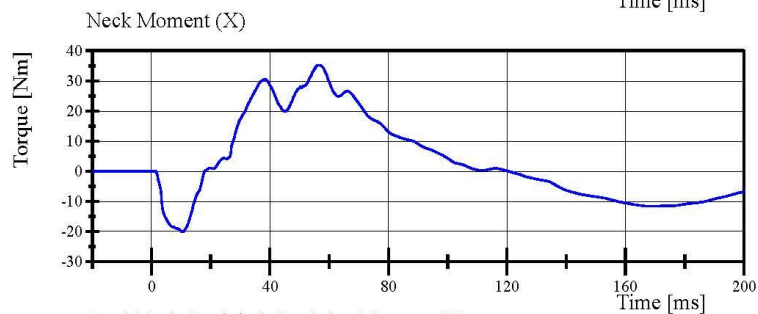

Filter Class: CFC\_600  
Max: 35.2 Nm at 56.6 ms  
Min: -20.1 Nm at 10.4 ms

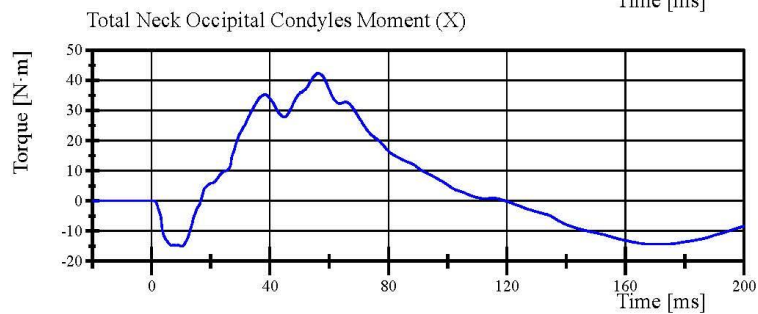

Filter Class: Without\_(Constar  
Max: 42.3 N·m at 56.2 ms  
Min: -15.1 N·m at 10.2 ms

Specification Source: CFR49 Part 572 Subpart V  
with Polarity in accordance with J211

12.05.2019 13:49:23 718



## Transportation Research Center Inc.

Left Lateral Shoulder  
SID IIs Serial No. 305 Certification No. 77-1  
Test Date: 12/5/2019

Test Parameter	Specification	Test Results	Pass
Temperature	20.6 - 22.2 °C	21.3 °C	Yes
Relative Humidity	10 - 70 %	40 %	Yes
Impactor Velocity	4.2 - 4.4 m/s	4.33 m/s	Yes
Impactor Acceleration	(-13) - (-18) g	-15.9 g	Yes
Shoulder Displacement	28 - 37 mm	33.0 mm	Yes
Upper Spine Lateral Acceleration	17 - 22 g	17.5 g	Yes

**Test meets specifications.**

**Condition: Used**




**Comments:**

**Left Arm S/N: 952**



## Transportation Research Center Inc.

Left Lateral Shoulder  
SID IIs Serial No. 305 Certification No. 77-1  
Test Date: 12/5/2019

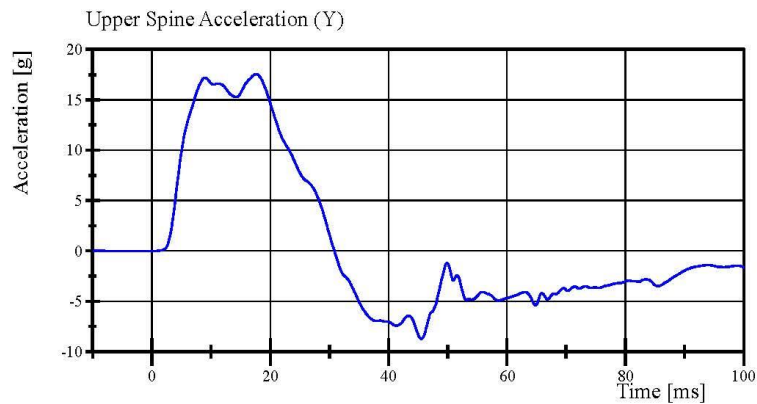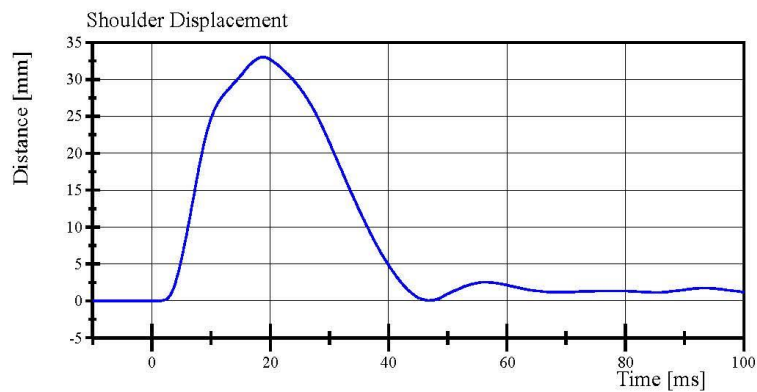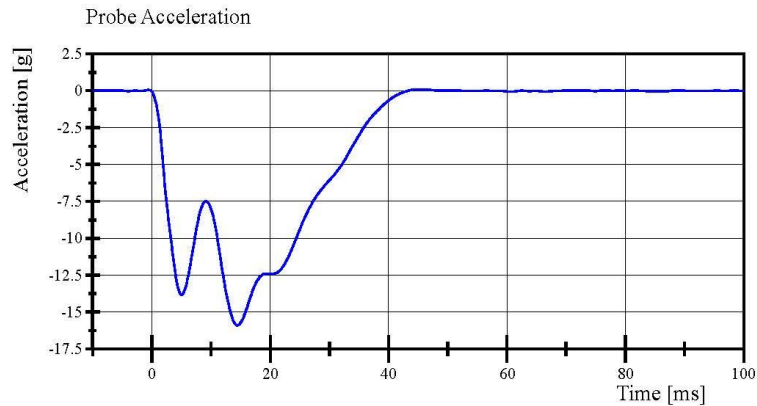

Specification Source: CFR49 Part 572 Subpart V  
with Polarity in accordance with J211

12.05.2019 08:36:00 842



## Transportation Research Center Inc.

Left Lateral Thorax with Arm  
SID IIs Serial No. 305 Certification No. 77-1  
Test Date: 12/5/2019

Test Parameter	Specification	Test Results	Pass
Temperature	20.6 - 22.2 °C	21.2 °C	Yes
Relative Humidity	10 - 70 %	41 %	Yes
Impactor Velocity	6.60 - 6.80 m/s	6.742 m/s	Yes
Impactor Acceleration	(-30) - (-36) g	-31.8 g	Yes
Shoulder Displacement	31 - 40 mm	35.7 mm	Yes
Upper Thorax Rib Displacement	25 - 32 mm	27.2 mm	Yes
Center Thorax Rib Displacement	30 - 36 mm	32.6 mm	Yes
Lower Thorax Rib Displacement	32 - 38 mm	36.0 mm	Yes
Upper Spine Lateral Acceleration	34 - 43 g	36.3 g	Yes
Lower Spine Lateral Acceleration	29 - 37 g	31.2 g	Yes

**Test meets specifications.**

**Condition:** Used

**Comments:**

**Left Arm S/N: 952**

**Shoulder Rib S/N: DM4450**




**Upper Thorax Rib S/N: 2135**

**Middle Thorax Rib S/N: 2136**

**Lower Thorax Rib S/N: 2137**

## Transportation Research Center Inc.

Left Lateral Thorax with Arm  
SID IIs Serial No. 305 Certification No. 77-1  
Test Date: 12/5/2019

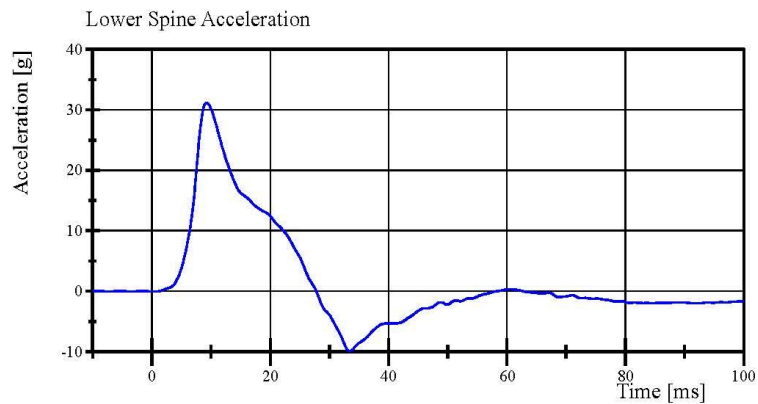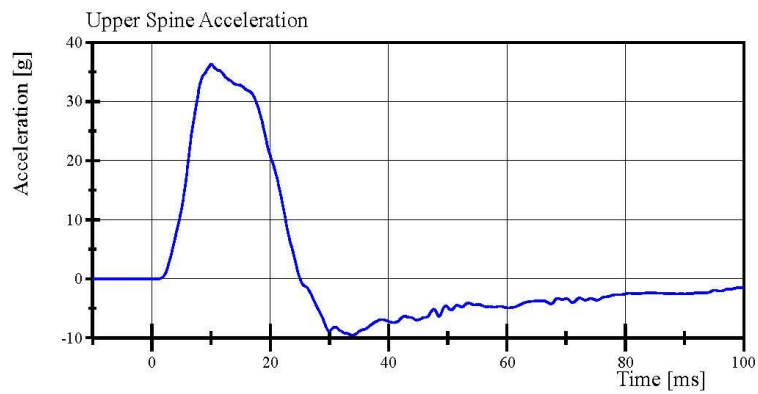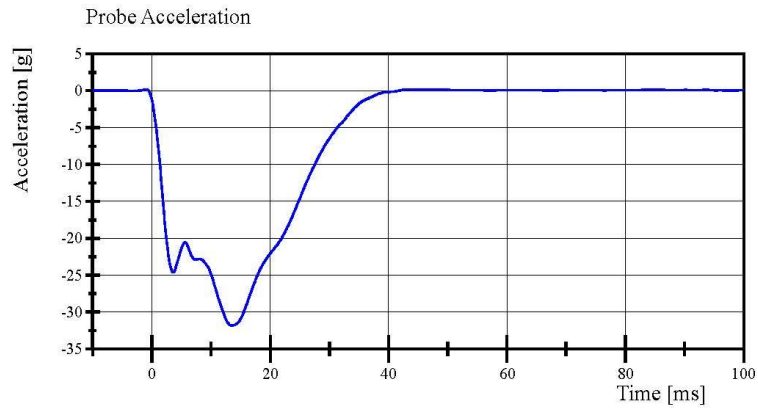





Specification Source: CFR49 Part 572 Subpart V  
with Polarity in accordance with J211

12.05.2019 10:11:14 610



## Transportation Research Center Inc.

Left Lateral Thorax with Arm  
SID IIs Serial No. 305 Certification No. 77-1  
Test Date: 12/5/2019

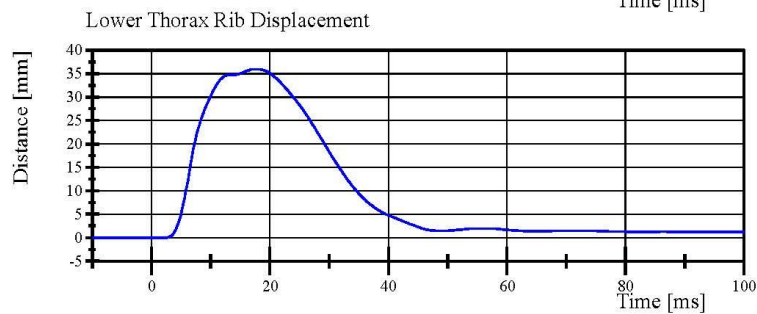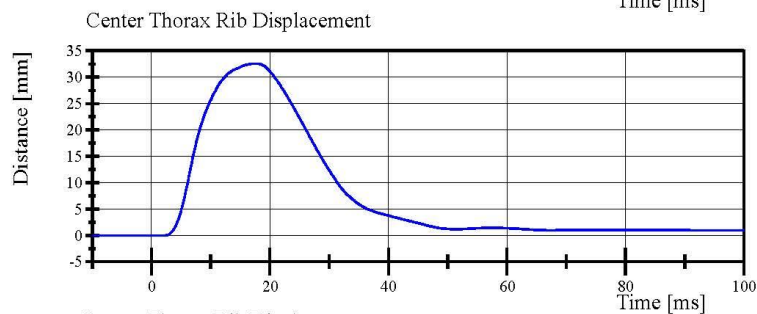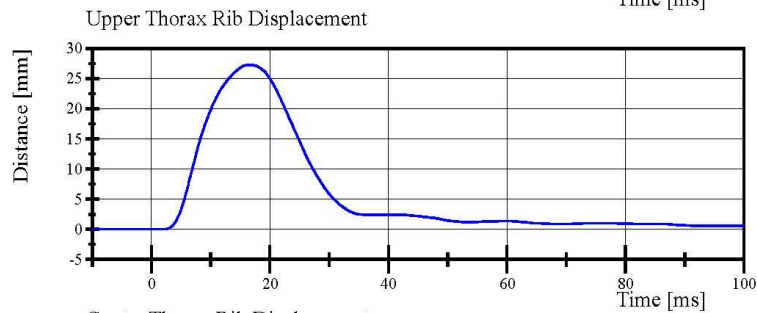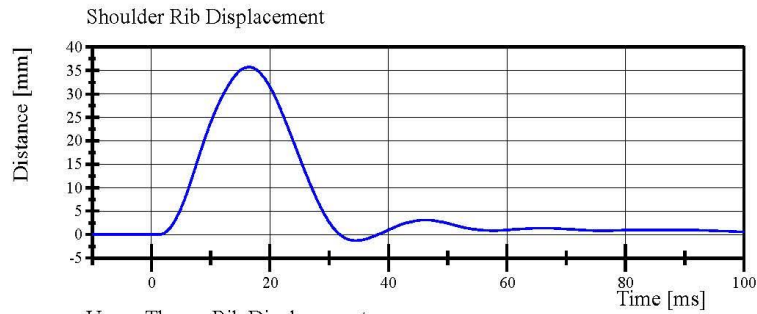

Specification Source: CFR49 Part 572 Subpart V  
with Polarity in accordance with J211

12.05.2019 10:11:15 610



## Transportation Research Center Inc.

Left Lateral Thorax without Arm  
SID IIS Serial No. 305 Certification No. 77-1  
Test Date: 12/5/2019

Test Parameter	Specification	Test Results	Pass
Temperature	20.6 - 22.2 °C	21.2 °C	Yes
Relative Humidity	10 - 70 %	40 %	Yes
Impactor Velocity	4.20 - 4.40 m/s	4.272 m/s	Yes
Impactor Acceleration	(-14) - (-18) g	-15.8 g	Yes
Upper Thorax Rib Displacement	32 - 40 mm	35.2 mm	Yes
Center Thorax Rib Displacement	39 - 45 mm	41.5 mm	Yes
Lower Thorax Rib Displacement	35 - 43 mm	39.3 mm	Yes
Upper Spine Lateral Acceleration	13 - 17 g	14.6 g	Yes
Lower Spine Lateral Acceleration	7 - 11 g	9.9 g	Yes

**Test meets specifications.**

**Condition:** Used

**Comments:**

**Upper Thorax Rib S/N: 2135**


**Middle Thorax Rib S/N: 2136**

**Lower Thorax Rib S/N: 2137**




## Transportation Research Center Inc.


Left Lateral Thorax without Arm  
SID IIs Serial No. 305 Certification No. 77-1  
Test Date: 12/5/2019

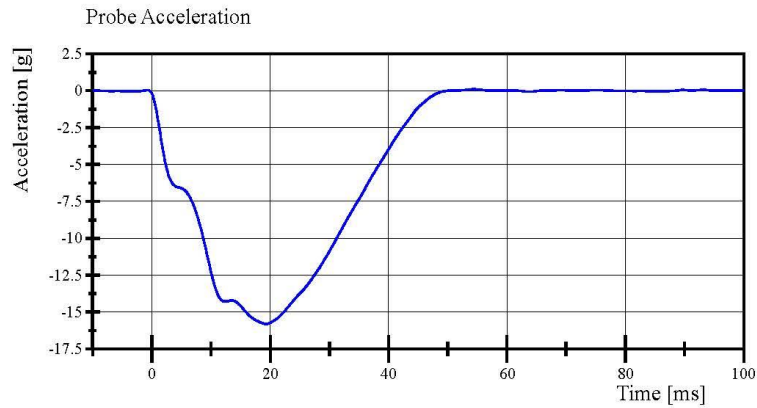

Filter Class: CFC\_180  
Max: 0.1 g at 54.5 ms  
Min: -15.8 g at 19.3 ms

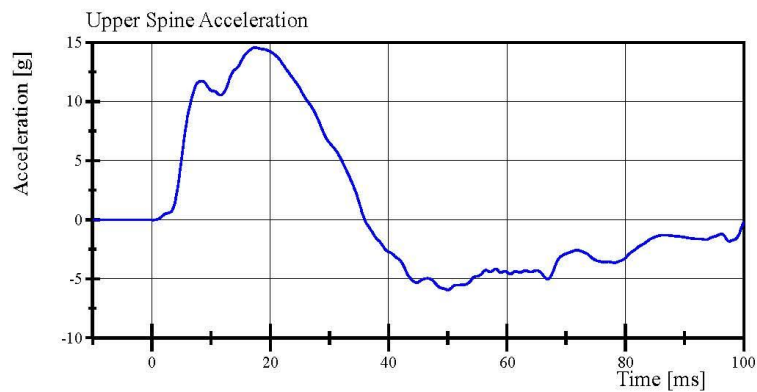

Filter Class: CFC\_180  
Max: 14.6 g at 17.4 ms  
Min: -5.9 g at 50.0 ms

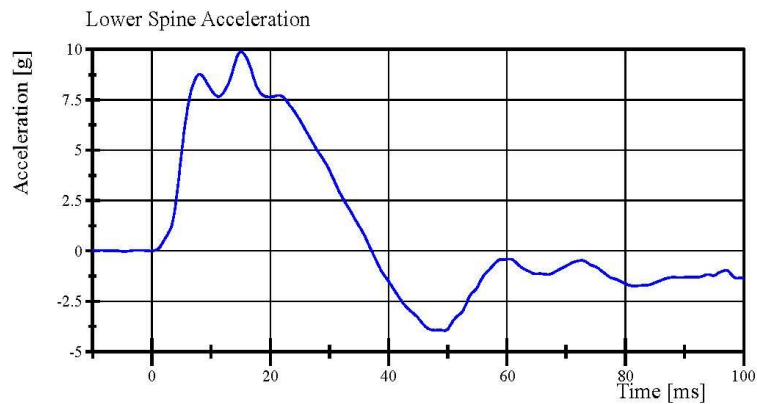

Filter Class: CFC\_180  
Max: 9.9 g at 15.0 ms  
Min: -4.0 g at 49.4 ms


Specification Source: CFR49 Part 572 Subpart V  
with Polarity in accordance with J211

12.05.2019 09:27:50 860




## Transportation Research Center Inc.


Left Lateral Thorax without Arm  
SID IIs Serial No. 305 Certification No. 77-1  
Test Date: 12/5/2019

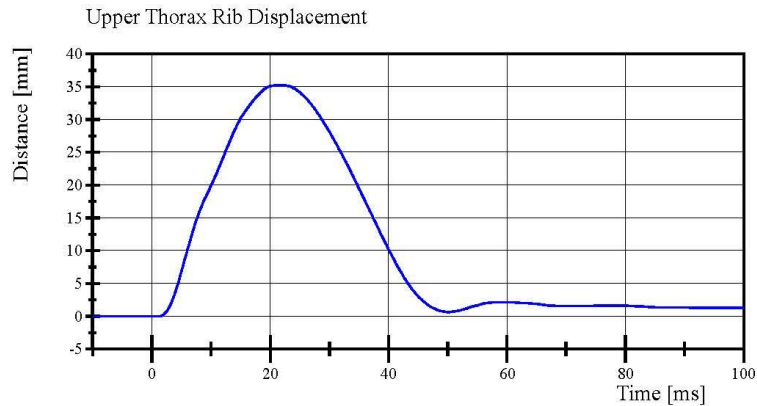

Filter Class: CFC\_600  
Max: 35.2 mm at 21.2 ms  
Min: -0.0 mm at 1.3 ms

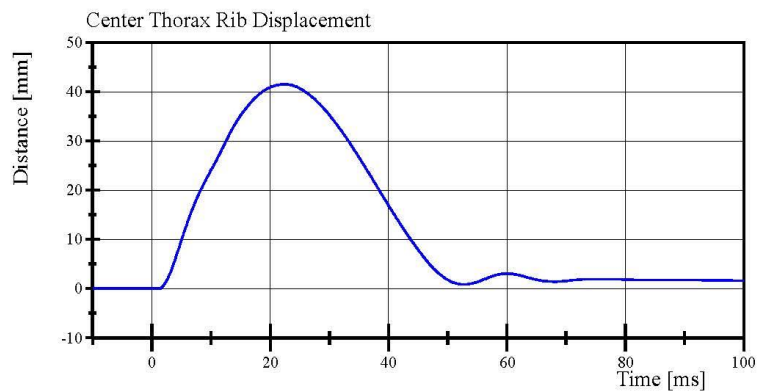

Filter Class: CFC\_600  
Max: 41.5 mm at 22.3 ms  
Min: -0.0 mm at 1.1 ms

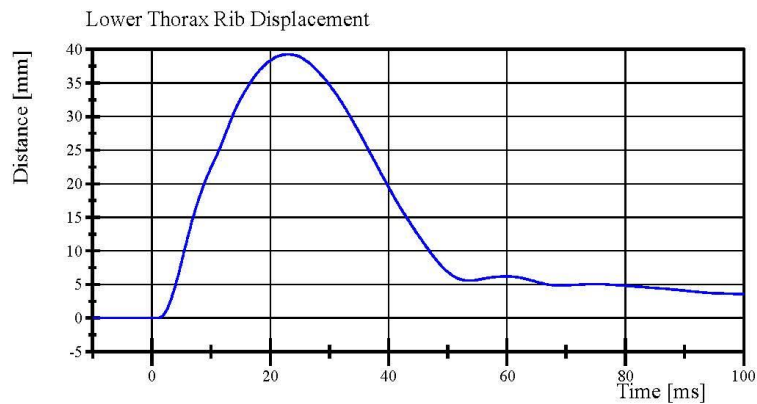

Filter Class: CFC\_600  
Max: 39.3 mm at 23.0 ms  
Min: -0.0 mm at 0.8 ms

Specification Source: CFR49 Part 572 Subpart V  
with Polarity in accordance with J211

12.05.2019 09:27:50 860



## Transportation Research Center Inc.

Left Lateral Abdomen  
SID IIs Serial No. 305 Certification No. 77-1  
Test Date: 12/5/2019

Test Parameter	Specification	Test Results	Pass
Temperature	20.6 - 22.2 °C	21.7 °C	Yes
Relative Humidity	10 - 70 %	39 %	Yes
Impactor Velocity	4.2 - 4.4 m/s	4.28 m/s	Yes
Impactor Acceleration	(-12) - (-16) g	-13.3 g	Yes
Upper Abdominal Rib Displacement	36 - 47 mm	44.9 mm	Yes
Lower Abdominal Rib Displacement	33 - 44 mm	41.8 mm	Yes
Lower Spine Lateral Acceleration	9 - 14.0 g	10.19 g	Yes

**Test meets specifications.**

**Condition: Used**

**Comments:**

**Upper Abdominal Rib S/N: 1997**


**Lower Abdominal Rib S/N: DS1234**

## Transportation Research Center Inc.

Left Lateral Abdomen

SID IIs Serial No. 305 Certification No. 77-1


Test Date: 12/5/2019

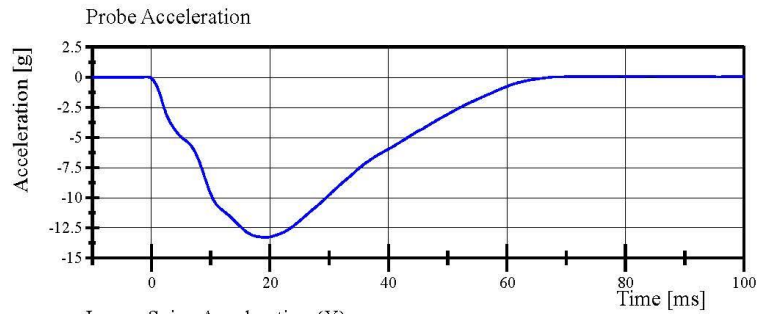

Filter Class: CFC\_180

Max: 0.1 g at 79.1 ms


Min: -13.3 g at 19.2 ms

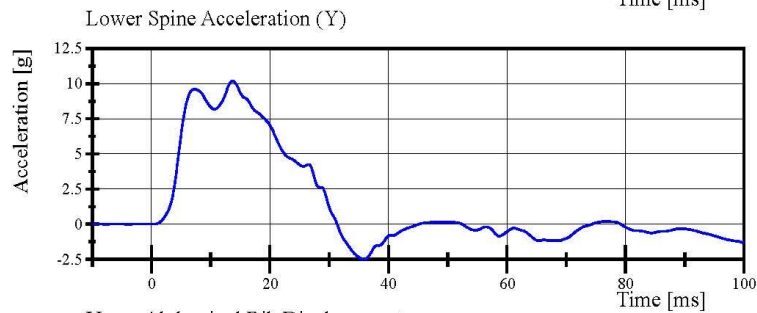

Filter Class: CFC\_180

Max: 10.2 g at 13.7 ms


Min: -2.5 g at 35.8 ms

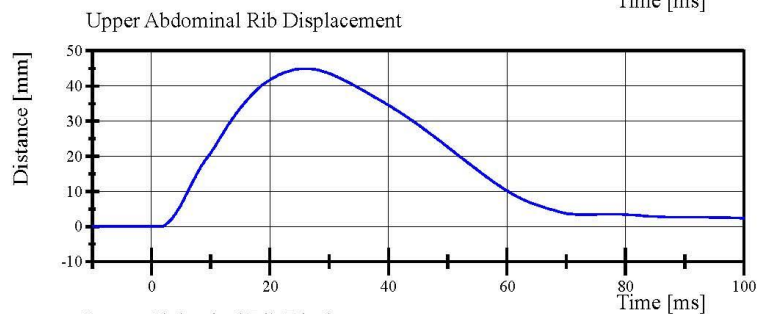

Filter Class: CFC\_600

Max: 44.9 mm at 25.7 ms

Min: -0.0 mm at 1.5 ms

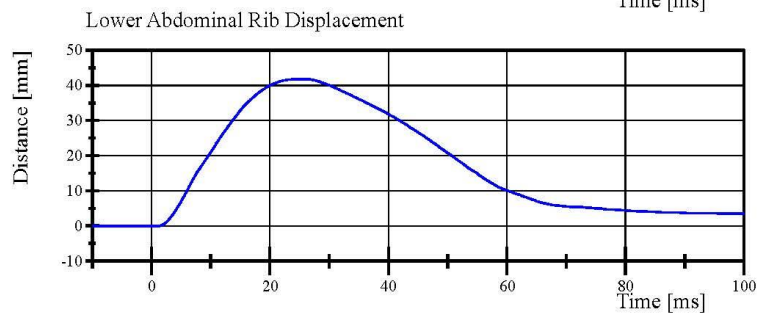

Filter Class: CFC\_600

Max: 41.8 mm at 25.7 ms

Min: -0.0 mm at 1.0 ms

Specification Source: CFR49 Part 572 Subpart V  
with Polarity in accordance with J211

12.05.2019 08:59:32 687



## Transportation Research Center Inc.

Left Lateral Pelvis  
SID IIs Serial No. 305 Certification No. 77-1  
Test Date: 12/5/2019

Test Parameter	Specification	Test Results	Pass
Temperature	20.6 - 22.2 °C	21.5 °C	Yes
Relative Humidity	10 - 70 %	38 %	Yes
Pendulum Velocity	6.6 - 6.8 m/s	6.63 m/s	Yes
Impactor Acceleration	(-38.0) - (-47.0) g	-43.39 g	Yes
Peak Pelvis Lateral Acceleration after 6ms	34 - 42 g	40.2 g	Yes
Acetabulum Force	3,600 - 4,300 N	4,174.3 N	Yes

**Test meets specifications.**

**Condition: Used**

**Comments:**

**Pelvis Skin S/N: 884**

**Pelvis Plug Info:**

**Manufacturer: SACO**




**S/N: 12554**

**Cal Date: 20181003**



## Transportation Research Center Inc.

Left Lateral Pelvis  
SID IIs Serial No. 305 Certification No. 77-1  
Test Date: 12/5/2019

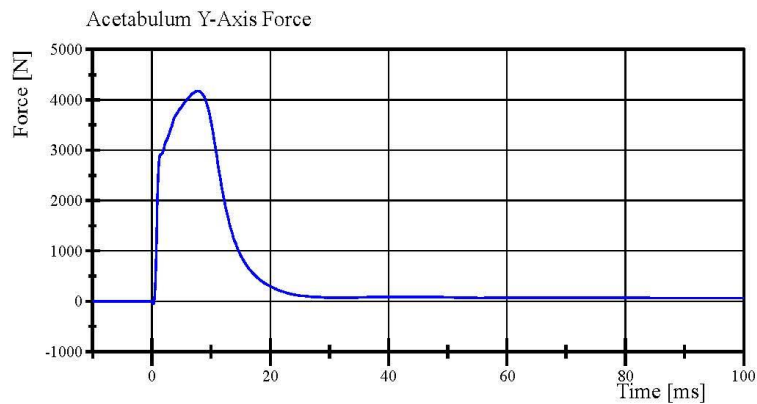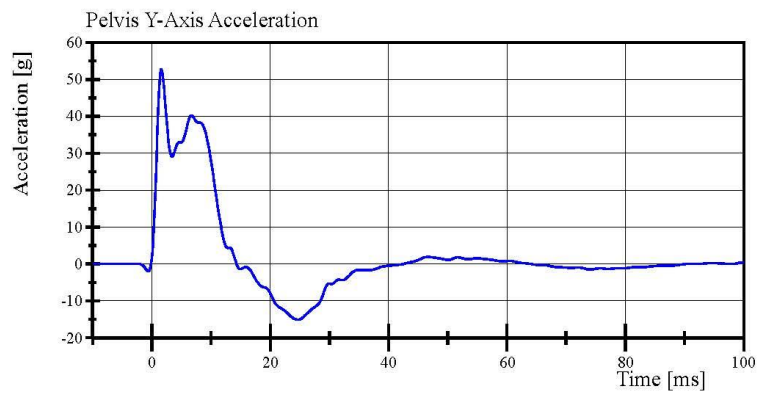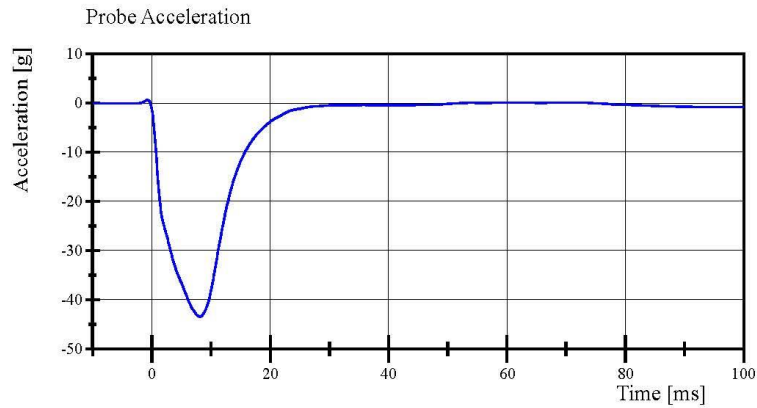

Specification Source: CFR49 Part 572 Subpart V  
with Polarity in accordance with J211

12.05.2019 10:38:23 445



## Transportation Research Center Inc.

Left Lateral Iliac

SID IIs Serial No. 305 Certification No. 77-1

Test Date: 12/5/2019

Test Parameter	Specification	Test Results	Pass
Temperature	20.6 - 22.2 °C	21.6 °C	Yes
Relative Humidity	10 - 70 %	41 %	Yes
Pendulum Velocity	4.2 - 4.4 m/s	4.28 m/s	Yes
Impactor Acceleration	(-36) - (-45) g	-37.1 g	Yes
Peak Pelvis Lateral Acceleration	28 - 39 g	29.8 g	Yes
Iliac Force	4,100 - 5,100 N	4,313.3 N	Yes

**Test meets specifications.**

**Condition: Used**

**Comments:**




**Pelvis Skin S/N: 884**

## Transportation Research Center Inc.

Left Lateral Iliac

SID IIs Serial No. 305 Certification No. 77-1

Test Date: 12/5/2019

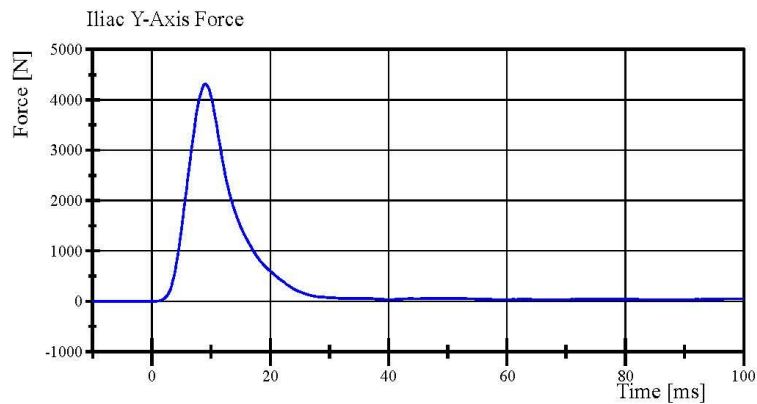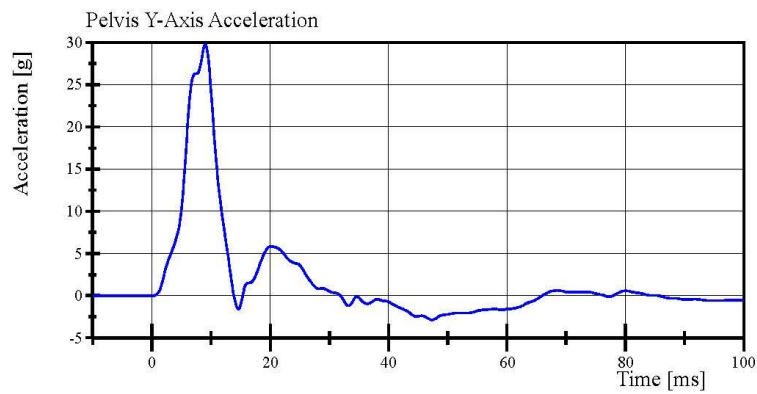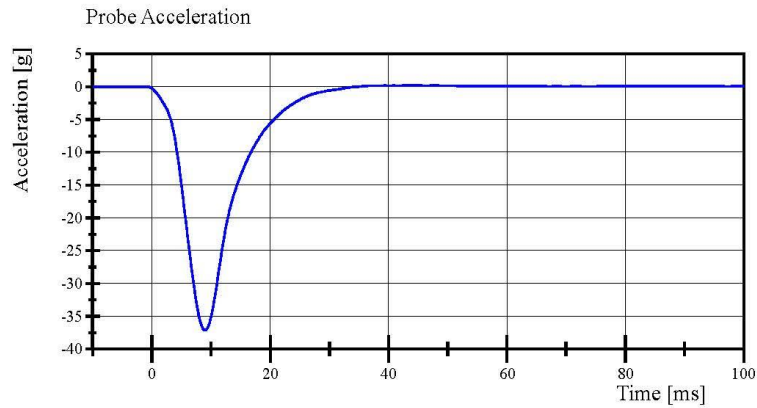

Specification Source: CFR49 Part 572 Subpart V  
with Polarity in accordance with J211

12.05.2019 08:21:15 696



**APPENDIX D**  
**TEST EQUIPMENT AND INSTRUMENTATION CALIBRATION DATA**

**TABLE 1 – Dummy Instrumentation (ES-2re)**

			ES-2re S/N F030		
			Serial Number	Manufacturer	Calibration Date
Head Accelerometers	X		P87680	Endevco	9-Oct-2019
	Y		T10352	Endevco	9-Oct-2019
	Z		P91950	Endevco	9-Oct-2019
Redundant Head Accelerometers	X		T11817	Endevco	9-Oct-2019
	Y		P83368	Endevco	9-Oct-2019
	Z		P94483	Endevco	9-Oct-2019
Thoracic Rib Displacement Potentiometers	Upper	Y	111	Honeywell	16-Apr-2019
	Middle	Y	174	FTSS	16-Apr-2019
	Lower	Y	173	FTSS	16-Apr-2019
Abdomen Load Cells	Front	Y	1441	Denton	16-Apr-2019
	Middle	Y	1436	Denton	16-Apr-2019
	Rear	Y	1437	Denton	16-Apr-2019
Lower Spine Accelerometers (T12)	X		T11866	Endevco	9-Oct-2019
	Y		P87139	Endevco	9-Oct-2019
	Z		P64884	Endevco	9-Oct-2019
Acetabulum Load Cell		Y	N/A	N/A	N/A
Pubic Symphysis Load Cell		Y	457-FY	Denton	16-Apr-2019

**TABLE 2 – Dummy Instrumentation (SID-IIs)**

				SID-IIs S/N 305			
				Serial Number	Manufacturer	Calibration Date	
Head Accelerometers				X	T11432	Endevco	14-Oct-2019
				Y	P93774	Endevco	14-Oct-2019
				Z	P91566	Endevco	14-Oct-2019
Redundant Head Accelerometers				X	P91615	Endevco	14-Oct-2019
				Y	P93762	Endevco	14-Oct-2019
				Z	P93761	Endevco	14-Oct-2019
Displacement Potentiometers	Shoulder			N/A	N/A	N/A	N/A
	Thoracic Rib	Upper	Y	007	Servo	18-Apr-2019	
		Middle	Y	037	Servo	18-Apr-2019	
		Lower	Y	036	Servo	23-May-2019	
	Abdominal Rib	Upper	Y	1295	Servo	18-Apr-2019	
		Lower	Y	1136	Servo	18-Apr-2019	
Lower Spine Accelerometers (T12)				X	P94545	Endevco	14-Oct-2019
				Y	P94647	Endevco	14-Oct-2019
				Z	P94530	Endevco	14-Oct-2019
Acetabulum Load Cell				Y	DK7483S-FY	FTSS	18-Apr-2019
Iliac Wing Load Cell				Y	287-FY	Denton	18-Apr-2019
Pelvis Plug (struck side)					12544	SACO	2-Oct-2018
Pelvis Plug (non-struck side)					36476	FTSS	23-Sep-2010



**TABLE 3 – Vehicle Instrumentation**

Vehicle Instrumentation			Serial Number	Manufacturer	Calibration Date
1	Vehicle Center of Gravity	X	P77747	Endevco	26-Nov-2019
	Vehicle Center of Gravity	Y	P58551	Endevco	26-Nov-2019
	Vehicle Center of Gravity	Z	P58549	Endevco	26-Nov-2019
2	Right Sill at Front Seat	X	P50393	Endevco	26-Nov-2019
	Right Sill at Front Seat	Y	P34046	Endevco	26-Nov-2019
	Right Sill at Front Seat	Z	P57803	Endevco	26-Nov-2019
3	Right Sill at Rear Seat	X	P58494	Endevco	26-Nov-2019
	Right Sill at Rear Seat	Y	P74456	Endevco	26-Nov-2019
	Right Sill at Rear Seat	Z	P58537	Endevco	26-Nov-2019
4	Left Sill at Front Door	Y	P58586	Endevco	26-Nov-2019
5	Left Sill at Rear Door	Y	T11445	Endevco	5-Sep-2019
6	Left A-Post Lower	Y	P57946	Endevco	21-Oct-2019
7	Left A-Post Middle	Y	P88038	Endevco	21-Oct-2019
8	Left B-Post Lower	Y	P50313	Endevco	1-Nov-2019
9	B-Post Middle	Y	P50491	Endevco	1-Nov-2019
10	Front Seat Track	Y	P50398	Endevco	26-Nov-2019
11	Rear Seat Track or Structure	Y	P94743	Endevco	26-Nov-2019
12	Right Rear Occupant Compartment	Y	P58472	Endevco	26-Nov-2019
13	Engine Block	X	T11816	Endevco	5-Sep-2019
	Engine Block	Y	P73587	Endevco	11-Oct-2019
14	Rear Floorpan Above Axle	X	P58530	Endevco	26-Nov-2019
	Rear Floorpan Above Axle	Y	P58548	Endevco	26-Nov-2019
	Rear Floorpan Above Axle	Z	P83356	Endevco	26-Nov-2019

**TABLE 4 – MDB Instrumentation**

MDB Instrumentation		Serial Number	Manufacturer	Calibration Date
MDB Center of Gravity	X	P75713	Endevco	10-Sep-2019
MDB Center of Gravity	Y	P76171	Endevco	10-Sep-2019
MDB Center of Gravity	Z	P76114	Endevco	10-Sep-2019
Left Frame Rail at Rear Axle Centerline	X	P75115	Endevco	10-Sep-2019
Left Frame Rail at Rear Axle Centerline	Y	P94567	Endevco	10-Sep-2019