

**NEW CAR ASSESSMENT PROGRAM
FORWARD COLLISION WARNING CONFIRMATION TEST
NCAP-DRI-FCW-20-05**

2020 Ford F-150 4X4 SuperCrew

DYNAMIC RESEARCH, INC.

355 Van Ness Avenue, STE 200
Torrance, California 90501



11 June 2020

Final Report

Prepared Under Contract No. DTNH22-14-D-00333

**U.S. DEPARTMENT OF TRANSPORTATION
National Highway Traffic Safety Administration
New Car Assessment Program
1200 New Jersey Avenue, SE
West Building, 4th Floor (NRM-110)
Washington, DC 20590**

Prepared for the Department of Transportation, National Highway Traffic Safety Administration, under Contract No. DTNH22-14-D-00333.

This publication is distributed by the U.S. Department of Transportation, National Highway Traffic Safety Administration, in the interest of information exchange. The opinions, findings and conclusions expressed in this publication are those of the author(s) and not necessarily those of the Department of Transportation or the National Highway Traffic Safety Administration. The United States Government assumes no liability for its contents or use thereof. If trade or manufacturer's names or products are mentioned, it is only because they are considered essential to the object of the publication and should not be construed as an endorsement. The United States Government does not endorse products of manufacturers.

Prepared By: J. Lenkeit and N. Watanabe
Program Manager Test Engineer
Date: 11 June 2020

1. Report No. NCAP-DRI-FCW-20-05	2. Government Accession No.	3. Recipient's Catalog No.	
4. Title and Subtitle Final Report of Forward Collision Warning Confirmation Test of a 2020 Ford F-150 4X4 SuperCrew.		5. Report Date 11 June 2020	
		6. Performing Organization Code DRI	
7. Author(s) J. Lenkeit, Program Manager N. Watanabe, Test Engineer		8. Performing Organization Report No. DRI-TM-19-173	
9. Performing Organization Name and Address Dynamic Research, Inc. 355 Van Ness Ave, STE 200 Torrance, CA 90501		10. Work Unit No.	
		11. Contract or Grant No. DTNH22-14-D-00333	
12. Sponsoring Agency Name and Address U.S. Department of Transportation National Highway Traffic Safety Administration New Car Assessment Program 1200 New Jersey Avenue, SE, West Building, 4th Floor (NRM-110) Washington, DC 20590		13. Type of Report and Period Covered Final Test Report May - June 2020	
		14. Sponsoring Agency Code NRM-110	
15. Supplementary Notes			
16. Abstract These tests were conducted on the subject 2020 Ford F-150 4X4 SuperCrew in accordance with the specifications of the New Car Assessment Program's (NCAP) most current Test Procedure in docket NHTSA-2006-26555-0134 to confirm the performance of a Forward Collision Warning system. The vehicle passed the requirements of the test for all three FCW test scenarios.			
17. Key Words Forward Collision Warning, FCW, New Car Assessment Program, NCAP		18. Distribution Statement Copies of this report are available from the following: NHTSA Technical Reference Division National Highway Traffic Safety Administration 1200 New Jersey Avenue, SE Washington, DC 20590	
19. Security Classif. (of this report) Unclassified	20. Security Classif. (of this page) Unclassified	21. No. of Pages 105	22. Price

TABLE OF CONTENTS

<u>SECTION</u>	<u>PAGE</u>
I. INTRODUCTION	1
II. DATA SHEETS	2
Data Sheet 1: Test Results Summary	3
Data Sheet 2: Vehicle Data	4
Data Sheet 3: Test Conditions	5
Data Sheet 4: Forward Collision Warning System Operation...	7
III. TEST PROCEDURES	10
A. Test Procedure Overview	10
B. Principal Other Vehicle	15
C. Automatic Braking System	15
D. Instrumentation	15
APPENDIX A Photographs	A-1
APPENDIX B Excerpts from Owner's Manual	B-1
APPENDIX C Run Logs	C-1
APPENDIX D Time Histories	D-1

Section I

INTRODUCTION

This test evaluates the ability of a Forward Collision Warning (FCW) system to detect and alert drivers to potential hazards in the path of the vehicle as specified in the New Car Assessment Program's "Forward Collision Warning Confirmation" test procedure, dated February 2013. Three driving scenarios are utilized to assess this technology. In the first test, a subject vehicle (SV) approaches a stopped principle other vehicle (POV) in the same lane of travel. The second test begins with the SV initially following the POV at the same constant speed. After a short while, the POV stops suddenly. The third test consists of the SV, traveling at a constant speed, approaching a slower moving POV, which is also being driven at a constant speed.

Section II
DATA SHEETS

FORWARD COLLISION WARNING
DATA SHEET 1: TEST RESULTS SUMMARY

(Page 1 of 1)

2020 Ford F-150 4X4 SuperCrew

VIN: 1FTEW1E42LFA1xxxx

Test Date: 5/18/2020

Forward Collision Warning setting: Pre-Collision: On,
Alert Sensitivity: Normal,
Distance Indication: On,
Active Braking: On

Test 1 - Subject Vehicle Encounters Stopped Principal Other Vehicle:	<u>Pass</u>
Test 2 - Subject Vehicle Encounters Decelerating Principal Other Vehicle:	<u>Pass</u>
Test 3 - Subject Vehicle Encounters Slower Principal Other Vehicle:	<u>Pass</u>

Overall: **Pass**

Notes:

FORWARD COLLISION WARNING

DATA SHEET 2: VEHICLE DATA

(Page 1 of 1)

2020 Ford F-150 4X4 SuperCrew

TEST VEHICLE INFORMATION

VIN: 1FTEW1E42LFA1xxxx

Body Style: 4 door Crew Cab Pickup Color: Magnetic

Date Received: 5/12/2020 Odometer Reading: 155 mi

DATA FROM VEHICLE'S CERTIFICATON LABEL

Vehicle manufactured by: Ford Motor Company

Date of manufacture: 10/19

Vehicle Type: Truck

DATA FROM TIRE PLACARD

Tires size as stated on Tire Placard: Front: 275/55R20 113T

Rear: 275/55R20 113T

Recommended cold tire pressure: Front: 240 kPa (35 psi)

Rear: 240 kPa (35 psi)

TIRES

Tire manufacturer and model: Hankook Dynapro AT2

Front tire specification: 275/55R20 113T

Rear tire specification: 275/55R20 113T

Front tire DOT prefix: 15M8D RN H0

Rear tire DOT prefix: 15M8D RN H0

FORWARD COLLISION WARNING
DATA SHEET 3: TEST CONDITIONS

(Page 1 of 2)

2020 Ford F-150 4X4 SuperCrew

GENERAL INFORMATION

Test date: 5/18/2020

AMBIENT CONDITIONS

Air temperature: 23.3 C (74 F)

Wind speed: 3.1 m/s (6.9 mph)

X Wind speed \leq 10 m/s (22 mph).

X Tests were not performed during periods of inclement weather. This includes, but is not limited to, rain, snow, hail, fog, smoke, or ash.

X Tests were conducted during daylight hours with good atmospheric visibility (defined as an absence of fog and the ability to see clearly for more than 5000 meters). The tests were not conducted with the vehicle oriented into the sun during very low sun angle conditions, where the sun is oriented 15 degrees or less from horizontal, and camera "washout" or system inoperability results.

VEHICLE PREPARATION

Verify the following:

All non-consumable fluids at 100% capacity: X

Fuel tank is full: X

Tire pressures are set to manufacturer's recommended cold tire pressure: X

Front: 240 kPa (35 psi)

Rear: 240 kPa (35 psi)

FORWARD COLLISION WARNING
DATA SHEET 3: TEST CONDITIONS

(Page 2 of 2)

2020 Ford F-150 4X4 SuperCrew

WEIGHT

Weight of vehicle as tested including driver and instrumentation:

Left Front: 772.0 kg (1702 lb)

Right Front: 721.2 kg (1590 lb)

Left Rear: 572.0 kg (1261 lb)

Right Rear: 556.1 kg (1226 lb)

Total: 2621.3 kg (5779 lb)

FORWARD COLLISION WARNING

DATA SHEET 4: FORWARD COLLISION WARNING SYSTEM OPERATION

(Page 1 of 3)

2020 Ford F-150 4X4 SuperCrew

Name of the FCW option, option package, etc.:

Pre-Collision Assist

Forward Collision Warning Setting used in test: Pre-Collision: On,
Alert Sensitivity: Normal,
Distance Indication: On,
Active Braking: On

Type and location of sensors the system uses:

Mono camera, located behind the windshield near the rearview mirror

How is the Forward Collision Warning presented to the driver? Warning light
 Buzzer or audible alarm
(Check all that apply) Vibration
 Other _____

Describe the method by which the driver is alerted. For example, if the warning is a light, where is it located, its color, size, words or symbol, does it flash on and off, etc. If it is a sound, describe if it is a constant beep or a repeated beep. If it is a vibration, describe where it is felt (e.g., pedals, steering wheel), the dominant frequency (and possibly magnitude), the type of warning (light, audible, vibration, or combination), etc.

The driver is provided with an audible and visual alert. The audible sound is a four-tone chime repeated three times. The visual alert is provided as a red and black flashing graphic in the cluster showing the text "Pre-Collision Assist." or via a flashing red LED bar located in front of the driver below the windshield.

See Appendix A Figure A14.

FORWARD COLLISION WARNING

DATA SHEET 4: FORWARD COLLISION WARNING SYSTEM OPERATION

(Page 2 of 3)

2020 Ford F-150 4X4 SuperCrew

Is the vehicle equipped with a switch whose purpose is to render FCW inoperable? Yes
 No

If yes, please provide a full description including the switch location and method of operation, any associated instrument panel indicator, etc.

The system is on by default after every ignition cycle but can be disabled through the cluster menu, accessed by means of buttons on the steering wheel. The hierarchy is:

Settings

Pre-Collision

Pre-Collision Assist On/Off.

If this has occurred, the driver will be prompted to re-enable the feature after an ignition cycle.

See the Owner's Manual, Pages 127, 131 and 277. These are shown in Appendix B, Pages B-2, B-3, and B-8.

See also Appendix A, Figures A12 and A13.

The Pre-Collision Assist system automatically disables when you select 4X4 LOW or when you manually disable AdvanceTrac.

Is the vehicle equipped with a control whose purpose is to adjust the range setting or otherwise influence the operation of FCW? Yes
 No

FORWARD COLLISION WARNING
DATA SHEET 4: FORWARD COLLISION WARNING SYSTEM OPERATION

(Page 3 of 3)

2020 Ford F-150 4X4 SuperCrew

If yes, please provide a full description.

The system functionality can be modified through the cluster menu, accessed by means of buttons on the steering wheel. The hierarchy is:

Settings

Pre-Collision

Alert Sensitivity –

Select High, Normal, or Low

Distance Indication - checkbox for on or off

Active Braking - checkbox for on or off

Pre-Collision - Select on or off

See the Owner's Manual, Pages 127, 131 and 277. These are shown in Appendix B, Pages B-2, B-3, and B-8.

See also Appendix A, Figures A12 and A13.

Are there other driving modes or conditions that render FCW inoperable or reduce its effectiveness?

Yes

No

If yes, please provide a full description.

The limitations of the system are described in the Owner's Manual, Pages 274-275, and 277-278. These are shown in Appendix B, Pages B-5 to B-6 and B-8 to B-9.

Notes:

Section III

TEST PROCEDURES

A. Test Procedure Overview

Three test procedures were used, as follows:

Test 1. Subject Vehicle (SV) Encounters Stopped Principal Other Vehicle (POV)

Test 2. Subject Vehicle Encounters Decelerating Principal Other Vehicle

Test 3. Subject Vehicle Encounters Slower Principal Other Vehicle

With the exception of trials associated with Test 1, all trials were performed with SV and POV automatic transmissions in “Drive” or with manual transmissions in the highest gear capable of sustaining the desired test speed. Manual transmission clutches remained engaged during all maneuvers. Except for Test 2, the brake lights of the POV were not illuminated.

In order to pass the test, if the FCW system provides a warning timing adjustment for the driver, at least one setting must meet the criterion of the test procedure. Therefore, if the vehicle was equipped with a warning timing adjustment, only the most “conservative” (earliest warning) setting was tested.

An overview of each of the test procedures follows.

1. TEST 1 – SUBJECT VEHICLE ENCOUNTERS STOPPED PRINCIPAL OTHER VEHICLE ON A STRAIGHT ROAD

This test evaluates the ability of the FCW function to detect a stopped lead vehicle, as depicted in Figure 1.

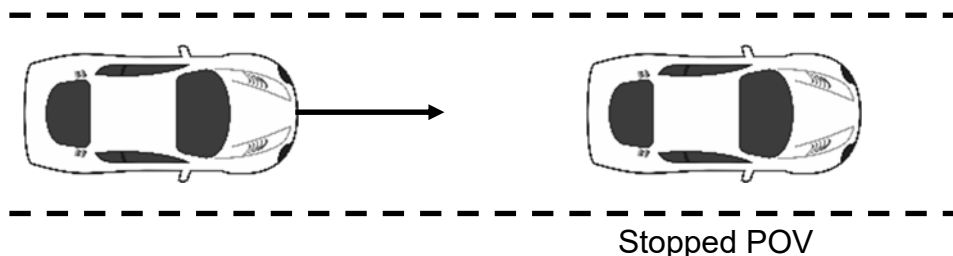


Figure 1. Depiction of Test 1

a. Alert Criteria

In order to pass the test, the FCW alert must be issued when the time-to-collision (TTC) is at least 2.1 seconds. The TTC for this test was calculated by considering the speeds of the SV and the POV at the time of the FCW alert (i.e., when the SV and POV speeds are nominally equal to 45 and 0 mph (72.4 and 0 km/h), respectively).

b. Procedure

The POV was parked in the center of a travel lane, with its longitudinal axis oriented parallel to the roadway edge and facing the same direction as the SV so that the SV approaches the rear of the POV.

The SV was driven at a nominal speed of 45 mph (72.4 km/h) in the center of the lane of travel, toward the parked POV. The test began when the SV was 492 ft (150 m) from the POV and ended when either of the following occurred:

- The required FCW alert occurred.
- The TTC to the POV fell to less than 90% of the minimum allowable range (i.e., $TTC = 1.9$ sec) for the onset of the required FCW alert.

The SV driver then steered and/or braked to keep the SV from striking the POV.

For an individual test trial to be valid, the following was required throughout the test:

- The SV vehicle speed could not deviate from the nominal speed by more than 1.0 mph (1.6 km/h) for a period of three seconds prior to (1) the required FCW alert or (2) before the range fell to less than 90% of the minimum allowable range for onset of the required FCW alert.
- The SV driver could not apply any force to the brake pedal before (1) the required FCW alert occurred or (2) the range fell to less than 90% of the minimum allowable range for onset of the required FCW alert.
- The lateral distance between the centerline of the SV, relative to the centerline of the POV, in road coordinates, could not exceed 2.0 ft (0.6 m).
- The yaw rate of the SV could not exceed ± 1 deg/sec during the test.

Nominally, the Test 1 series was comprised of seven individual trials. The FCW system must satisfy the TTC alert criteria for at least five of the seven test trials.

2. TEST 2 – SUBJECT VEHICLE ENCOUNTERS DECELERATING PRINCIPAL OTHER VEHICLE

The SV in this test initially followed the POV at a constant time gap and then the POV suddenly decelerated, as depicted in Figure 2. The test evaluates the ability of the FCW to recognize a decelerating lead vehicle and to issue an alert to SV driver in a timely manner.

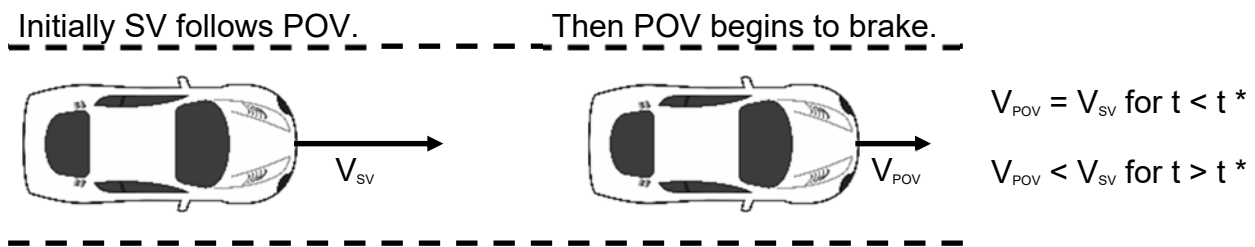


Figure 2. Depiction of Test 2

a. Alert Criteria

In order to pass the test, the FCW alert must be issued when TTC is at least 2.4 seconds. The TTC for this test, a prediction of the time it would take for the SV to collide with the POV, was calculated by considering three factors at the time of the FCW alert: (1) the speed of the SV, (2) the speed of the POV, and (3) the deceleration of the POV¹.

b. Procedure

Test 2 began with the SV and the POV traveling on a straight, flat road at a constant speed of 45.0 mph (72.4 km/h), in the center of the lane of travel. The headway from the SV to the POV was nominally maintained at 98.4 ft (30 m) until the POV braking was initiated.

The test began approximately 7 seconds before the driver of the POV started a braking maneuver in which the POV brakes were rapidly applied and modulated such that a constant deceleration of 0.3 g was achieved within 1.5 seconds after braking is initiated. The test ended when either of the following conditions was satisfied:

- The required FCW alert occurred.
- The TTC to the POV fell to less than 90% of the minimum allowable range (i.e., TTC = 2.2 sec) for the onset of the required FCW alert.

The SV driver then steered and/or braked to keep the SV from striking the POV.

¹To simplify calculation of the TTC for Test 2, the deceleration of the POV is assumed to remain constant from the time of the FCW alert until the POV comes to a stop (i.e., a “constant” rate of slowing is assumed).

For an individual test trial to be valid, the following was required throughout the test:

- The initial POV vehicle speed could not deviate from the nominal speed by more than 1.0 mph (1.6 km/h) for a period of 3 seconds prior to the initiation of POV braking.
- The speed of the SV could not deviate from the nominal speed by more than 1.0 mph (1.6 km/h) for a period of 3 seconds prior to (1) the required FCW alert or (2) before the range fell to less than 90% of the minimum allowable range for onset of the required FCW alert.
- The lateral distance between the centerline of the SV, relative to the centerline of the POV, in road coordinates, could not exceed 2.0 ft (0.6 m).
- The yaw rates of the SV and POV could not exceed ± 1 deg/sec during the test.
- The POV deceleration level was nominally required to be 0.3 g within 1.5 seconds after initiation of POV braking. The acceptable error magnitude of the POV deceleration was $\pm 0.03g$, measured at the time the FCW alert first occurred. An initial overshoot beyond the deceleration target was acceptable, however the first local deceleration peak observed during an individual trial could not exceed 0.375 g for more than 50 ms. Additionally, the deceleration could not exceed 0.33 g over a period defined from 500 ms after the first local deceleration peak occurs, to the time when the FCW alert first occurred.
- The tolerance for the headway from the SV to the POV was ± 8.2 ft (± 2.5 m), measured at two instants in time: (1) three seconds prior to the time the POV brake application was initiated and (2) at the time the POV brake application was initiated.
- SV driver could not apply any force to the brake pedal before (1) the required FCW alert occurred or (2) the range fell to less than 90% of the minimum allowable range for onset of the required FCW alert.

Nominally, the Test 2 series was comprised of seven individual trials. The FCW system must satisfy the TTC alert criteria for at least five of the seven test trials.

3. TEST 3 – SUBJECT VEHICLE ENCOUNTERS SLOWER PRINCIPAL OTHER VEHICLE

This test examines the ability of the FCW system to recognize a slower lead vehicle being driven with a constant speed and to issue a timely alert. As depicted in Figure 3, the scenario was conducted with a closing speed equal to 25.0 mph (40.2 km/h).



Figure 3. Depiction of Test 3

a. Alert Criteria

In order to pass the test, the FCW alert must be issued when TTC is at least 2.0 seconds. The TTC for this test, a prediction of the time it would take for the SV to collide with the POV, was calculated by considering the speeds of the SV and POV at the time of the FCW alert.

b. Procedure

Throughout the test, the POV was driven at a constant 20.0 mph (32.2 km/h) in the center of the lane of travel.

The SV was driven at 45.0 mph (72.4 km/h), in the center lane of travel, toward the slow-moving POV.

The test began when the headway from the SV to the POV was 329 ft (100 m) and ended when either of the following occurred:

- The required FCW alert occurred.
- The TTC to the POV fell to less than 90% of the minimum allowable range (i.e., $TT = 1.8$ sec) for the onset of the required FCW alert.

The SV driver then steered and/or braked to keep the SV from striking the POV.

For an individual test trial to be valid, the following was required throughout the test:

- The SV vehicle speed could not deviate from the nominal speed by more than 1.0 mph (1.6 km/h) for a period of 3 seconds prior to (1) the required FCW alert or (2) before the range fell to less than 90% of the minimum allowable range for onset of the required FCW alert.
- Speed of the POV could not deviate from the nominal speed by more than 1.0 mph (1.6 km/h) during the test.
- The lateral distance between the centerline of the SV, relative to the centerline of the POV, in road coordinates, could not exceed 2.0 ft (0.6 m).
- The yaw rates of the SV and POV could not exceed ± 1 deg/sec during the test.
- SV driver could not apply any force to the brake pedal before (1) the required FCW

alert occurred or (2) before the range fell to less than 90% of the minimum allowable range for onset of the required FCW alert.

Nominally, the Test 3 series was comprised of seven individual trials. The FCW system must satisfy the TTC alert criteria for at least five of the seven test trials.

B. Principal Other Vehicle

The vehicle used as the Principal Other Vehicle (POV) was a 2006 Acura RL. This satisfied the test requirement that the POV be a mid-size sedan. The vehicle had a rear license plate in order to provide a suitable representative radar profile. Vehicle loading consisted of the driver plus equipment and instrumentation.

C. Automatic Braking System

The POV was equipped with an automatic braking system, which was used in Test 2. The braking system consisted of the following components:

- High pressure nitrogen bottle, strapped to the front passenger seat, with regulator and pressure gauges
- Pneumatic piston-type actuator, with solenoid valve
- “Pickle” switch to activate brakes

D. Instrumentation

Table 1 lists the sensors, signal conditioning, and data acquisition equipment used for these tests.

Table 1. Test Instrumentation and Equipment

Type	Output	Range	Accuracy, Other Primary Specs	Mfr, Model	Serial Number	Calibration Dates Last Due
Tire Pressure Gauge	Vehicle Tire Pressure	0-100 psi 0-690 kPa	< 1% error between 20 and	Omega DPG8001	17042707002	By: DRI Date: 7/3/2019 Due: 7/3/2020
Platform Scales	Vehicle Total, Wheel, and Axle Load	2200 lb/platform	0.1% of reading	Intercomp SW wireless	0410MN20001	By: DRI Date: 4/20/2020 Due: 4/20/2021
Differential Global Positioning System	Position, Velocity	Latitude: ±90 deg Longitude: ±180 deg Altitude: 0-18 km Velocity: 0-1000 knots	Horizontal Position: ±1 cm Vertical Position: ±2 cm Velocity: 0.05 km/h	Trimble GPS Receiver, 5700 (base station and in-vehicle)	00440100989	NA
Multi-Axis Inertial Sensing System	Position; Longitudinal, Lateral, and Vertical Accels; Lateral, Longitudinal and Vertical Velocities; Roll, Pitch, Yaw Rates; Roll, Pitch, Yaw Angles	Accels ± 10g, Angular Rate ±100 deg/s, Angle >45 deg, Velocity >200 km/h	Accels .01g, Angular Rate 0.05 deg/s, Angle 0.05 deg, Velocity 0.1 km/h	Oxford Inertial +		By: Oxford Technical Solutions
					2258	Date: 5/3/2019 Due: 5/3/2021
					2182	Date: 9/16/2019 Due: 9/16/2021
Real-Time Calculation of Position and Velocity Relative to Lane Markings (LDW) and POV (FCW)	Distance and Velocity to lane markings (LDW) and POV (FCW)	Lateral Lane Dist: ±30 m Lateral Lane Velocity: ±20 m/sec Longitudinal Range to POV: ±200 m Longitudinal Range Rate: ±50 m/sec	Lateral Distance to Lane Marking: ±2 cm Lateral Velocity to Lane Marking: ±0.02m/sec Longitudinal Range: ±3 cm Longitudinal Range Rate: ±0.02 m/sec	Oxford Technical Solutions (OXTS), RT-Range	97	NA

Table 1. Test Instrumentation and Equipment (continued)

Type	Output	Range	Accuracy, Other Primary Specs	Mfr, Model	Serial Number	Calibration Dates Last Due
Microphone	Sound (to measure time at auditory alert)	Frequency Response: 80 Hz – 20 kHz	Signal-to-noise: 64 dB, 1 kHz at 1 Pa	Audio-Technica AT899	NA	NA
Light Sensor	Light intensity (to measure time at visual alert)	Spectral Bandwidth: 440-800 nm	Rise time < 10 msec	DRI designed and developed Light Sensor	NA	NA
Accelerometer	Acceleration (to measure time at haptic alert)	±5g	≤ 3% of full range	Silicon Designs, 2210-005	NA	NA
Coordinate Measurement Machine	Inertial Sensing System Coordinates	0-8 ft 0-2.4 m	±.0020 in. ±.051 mm (Single point articulation accuracy)	Faro Arm, Fusion	UO8-05-08-06636	By: DRI Date: 1/6/2020 Due: 1/6/2021
Type	Description			Mfr, Model	Serial Number	
Data Acquisition System	Data acquisition is achieved using a dSPACE MicroAutoBox II. Data from the Oxford IMU, including Longitudinal, Lateral, and Vertical Acceleration, Roll, Yaw, and Pitch Rate, Forward and Lateral Velocity, Roll and Pitch Angle are sent over Ethernet to the MicroAutoBox. The Oxford IMUs are calibrated per the manufacturer’s recommended schedule (listed above).			dSPACE Micro-Autobox II 1401/1513		
				Base Board	549068	
				I/O Board	588523	

For systems that implement audible or haptic alerts, part of the pre-test instrumentation verification process is to determine the tonal frequency of the audible warning or the vibration frequency of the tactile warning through use of the PSD (Power Spectral Density) function in Matlab. This is accomplished in order to identify the center frequency around which a band-pass filter is applied to subsequent audible or tactile warning data so that the beginning of such warnings can be programmatically determined. The band-pass filter used for these warning signal types is a phaseless, forward-reverse pass, elliptical (Cauer) digital filter, with filter parameters as listed in Table 2.

Table 2. Audible and Tactile Warning Filter Parameters

Warning Type	Filter Order	Peak-to-Peak Ripple	Minimum Stop Band Attenuation	Passband Frequency Range
Audible	5 th	3 dB	60 dB	Identified Center Frequency \pm 5%
Tactile	5 th	3 dB	60 dB	Identified Center Frequency \pm 20%

APPENDIX A

Photographs

LIST OF FIGURES


	Page
Figure A1. Front View of Subject Vehicle	A-3
Figure A2. Rear View of Subject Vehicle.....	A-4
Figure A3. Window Sticker (Monroney Label)	A-5
Figure A4. Vehicle Certification Label.....	A-6
Figure A5. Tire Placard.....	A-7
Figure A6. Front View of Principal Other Vehicle.....	A-8
Figure A7. Rear View of Principal Other Vehicle	A-9
Figure A8. DGPS, Inertial Measurement Unit, and MicroAutoBox Installed in Subject Vehicle	A-10
Figure A9. Sensor for Detecting Auditory and Visual Alerts	A-11
Figure A10. Computer Installed in Subject Vehicle.....	A-12
Figure A11. Brake Actuation System Installed in Principal Other Vehicle	A-13
Figure A12. System Setting Menus	A-14
Figure A13. Controls for Changing System Setup Parameters	A-15
Figure A14. Visual Alert.....	A-16



Figure A1. Front View of Subject Vehicle



Figure A2. Rear View of Subject Vehicle



Go Further
ford.com

VEHICLE DESCRIPTION

F-150

2020 F-150 4X4 SUPERCREW
145" WHEELBASE
3.5L V6 ECOBOOST
ELEC 10-SPEED AUTO W/TOW MO

LF A1

EXTERIOR MAGNETIC
INTERIOR BLACK LTHR TRIM BUCKET SEAT

EPA DOT Fuel Economy and Environment

Fuel Economy

18 MPG
combined city/hwy

16 city
22 highway


5.6 gallons per 100 miles

Standard Pickup Trucks range from 12 to 25 MPG. The best vehicle rates 136 MPG.

You spend \$3,750 more in fuel costs over 5 years compared to the average new vehicle.

STANDARD EQUIPMENT INCLUDED AT NO EXTRA CHARGE

<p>EXTERIOR</p> <ul style="list-style-type: none"> • BOX LIGHTING-LED • BOXLINK™ • DAYTIME RUNNING LIGHTS • FOG LAMPS • FULLY BOXED STEEL FRAME • HEADLAMPS - AUTO HIGH BEAM • HEADLAMPS - AUTOLAMP (ON/OFF) • PICKUP BOX TIE DOWN HOOKS • POWER ADJ/HEATED/POWER FOLD EXTERIOR MIRRORS • POWER SLIDING REAR WINDOW W/DEFROST & PRIVACY TINT • POWER TAILGATE LOCK • TRAILER SWAY CONTROL 	<p>INTERIOR</p> <ul style="list-style-type: none"> • 60/40 FOLD-UP REAR BENCH • 8.0" PRODUCTIVITY SCREEN • A/C W/DUAL CLIMATE CONTROL • ADJUST PEDALS W/MEMORY • AMBIENT LIGHTING-ONE COLOR • AUTO DIM REARVIEW MIRROR • HTD/VENTILATED FRT SEATS • LEATHER TRIMMED SEATS • LEATHER WRAPPED STR WHEEL • POWER DRIV AND PASS SEATS-10-WAY WITH DRIV MEMORY AND LUMBAR • STEERING - TILT/TELESCOPIC WHEEL WITH AUDIO 	<p>FUNCTIONAL</p> <ul style="list-style-type: none"> • AUTO START STOP TECH • BLIS W/CROSS-TRAFFIC ALERT • CLASS IV TRAILER HITCH W/ SMART TRLR TOW CONNECTOR • FORDPASS™ CONNECT 4GWI-FI HOTSPOT TELEMATICS MODEM • GAS-CHARGED SHOCKS • INTELLIGENT ACCESS W/PUSH BUTTON START • LANE KEEPING SYSTEM • PRE-COLLISION ASSIST W/AEB • REAR VIEW CAMERA • REMOTE START- FORDPASS APP • SIRIUSXM® - SVC N/A AK&HI • SYNC®3 8" SCRN W/APPLINK® 	<p>SAFETY/SECURITY</p> <ul style="list-style-type: none"> • ADVANCED SECURITY PACK • ADVANCETRAC® WITH RSC® • AIRBAGS - FRONT SEAT MOUNTED SIDE IMPACT • AIRBAGS - SAFETY CANOPY® • CTR HIGH MOUNT STOP LAMP • SOS POST-CRASH ALERT SYS™ • TIRE PRESSURE MONIT SYS <p>WARRANTY</p> <ul style="list-style-type: none"> • 3YR/36,000 BUMPER / BUMPER • 5YR/60,000 POWERTRAIN • 5YR/60,000 ROADSIDE ASSIST
--	--	--	---

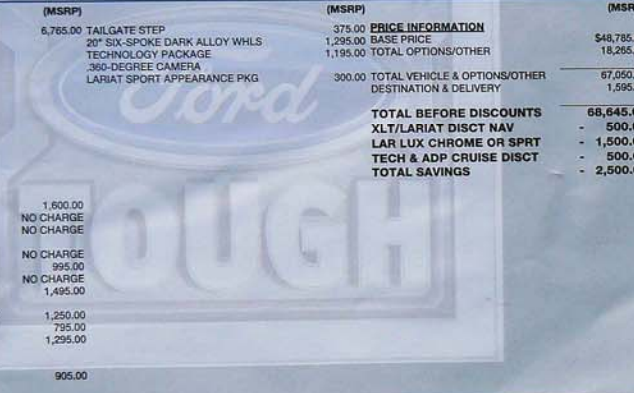

INCLUDED ON THIS VEHICLE

EQUIPMENT GROUP 502A

- LARIAT SERIES
- REMOTE START SYSTEM
- REVERSE SENSING SYSTEM
- LED SIDE-MIRROR SPOTLIGHTS
- 110V/400W OUTLET
- 8AO SOUND SYSTEM
- HEATED STEERING WHEEL
- LARIAT BED UTILITY PACKAGE
- BOXLINK
- LED BOX LIGHTING
- SECOND-ROW HEATED SEATS

OPTIONAL EQUIPMENT/OTHER

- 3.5L V6 ECOBOOST 1,600.00
- 275/55R20 BSW ALL-TERRAIN NO CHARGE
- 3.55 ELECTRONIC LOCK RR AXLE NO CHARGE
- 700X GVWR PACKAGE NO CHARGE
- FRONT LICENSE PLATE BRACKET NO CHARGE
- POWER-DEPLOYABLE RUNNING BDS 995.00
- CALIFORNIA EMISSIONS SYSTEM NO CHARGE
- TWIN PANEL MOONROOF 1,495.00
- PRO TRAILER BACKUP ASSIST 1,250.00
- ADAPT CRUISE-STOPGO-PEDEST DEC 795.00
- VOICE-ACTIVATED NAVIGATION 1,295.00
- MAX TRAILER TOW PACKAGE
- 36GAL EXTENDED RANGE FUEL TAN INTEGRATED TRAILER BRAKE CONT
- FX4 OFF-ROAD PACKAGE 905.00
- SKID PLATES
- FLOOR LINER - TRAY STYLE

(MSRP)	(MSRP)	(MSRP)
6,765.00 TAILGATE STEP	375.00 PRICE INFORMATION	548,785.00
20" SIX-SPOKE DARK ALLOY WHLS TECHNOLOGY PACKAGE	1,295.00 BASE PRICE	18,265.00
360-DEGREE CAMERA LARIAT SPORT APPEARANCE PKG	1,195.00 TOTAL OPTIONS/OTHER	
	300.00 TOTAL VEHICLE & OPTIONS/OTHER DESTINATION & DELIVERY	67,050.00
		1,595.00
	TOTAL BEFORE DISCOUNTS	58,645.00
	XL/LARIAT DISCT NAV	- 500.00
	LAR LUX CHROME OR SPRT TECH & ADP CRUISE DISCT	- 1,500.00
	TOTAL SAVINGS	- 500.00
		- 2,500.00

RAAMP ONE	FINAL ASSEMBLY PLANT	TOTAL MSRP \$66,145.00
RH27	DEARBORN	
RAAMP TWO	METHOD OF TRANSP	
	RAIL	
	ITEM #:	
	71-S800 OIT 2	

When you decide to lease or finance your vehicle, you'll find the choices that are right for you. See your dealer for details or visit www.ford.com/finance.

GOVERNMENT 5-STAR SAFETY RATINGS

Overall Vehicle Score ★★★★★
Based on the combined ratings of frontal, side and rollover. Should ONLY be compared to other vehicles of similar size and weight.

Frontal Crash	Driver	★★★★★
	Passenger	★★★★★

Based on the risk of injury in a frontal impact. Should ONLY be compared to other vehicles of similar size and weight.


Side Crash	Front seat	★★★★★
	Rear seat	★★★★★

Based on the risk of injury in a side impact.


Rollover ★★★★★
Based on the risk of rollover in a single-vehicle crash.

Star ratings range from 1 to 5 stars (★★★★★), with 5 being the highest.
Source: National Highway Traffic Safety Administration (NHTSA).
www.safercar.gov or 1-888-327-4236

1FTEW1E42LFA1




42 YEARS FORD F-SERIES
AMERICA'S BEST SELLING TRUCKS



WARNING: Operating, servicing and maintaining a passenger vehicle, pickup truck, van, or off-road vehicle can expose you to chemicals including engine exhaust, carbon monoxide, phthalates, and lead, which are known to the State of California to cause cancer and birth defects or other reproductive harm. To minimize exposure, avoid breathing exhaust, do not idle the engine except as necessary, service your vehicle in a well-ventilated area and wear gloves or wash your hands frequently when servicing your vehicle. For more information go to www.PSVWarnings.ca.gov/passenger-vehicle.

SCAN OR TEXT 1FTEW1E42LFA1 TO 482828

Msg & Data rates may apply. Text HELP for help.



www.ford.com/PassengerVehicle

MANUFACTURER'S SUGGESTED RETAIL PRICE

DEALER INSTALLED OPTIONS

FACTORY DISCOUNTS

\$ 66,145.00

-\$ 2,500.00

When you decide to lease or finance your vehicle, you'll find the choices that are right for you. See your dealer for details or visit www.ford.com/finance.

Figure A3. Window Sticker (Monroney Label)

MFD. BY FORD MOTOR CO.

FRONT GAWR: 1599 KG (3525 LB)

WITH 275/55R20 113T
20x8.5J

AT 240 kPa/ 35 PSI COLD

THIS VEHICLE CONFORMS TO ALL APPLICABLE FEDERAL MOTOR VEHICLE
SAFETY STANDARDS IN EFFECT ON THE DATE OF MANUFACTURE SHOWN ABOVE.

VIN: 1FTEW1E42LFA1

DATE: 10/19

GVWR: 3175 KG (7000 LB)

REAR GAWR: 1837 KG (4050 LB)

TIRES WITH 275/55R20 113T
RIMS 20x8.5J

AT 240 kPa/ 35 PSI COLD

TIRES
RIMS



EXT PNT: J7

RC: 71 DSO:

WB	INT TR	TP/PS	R	AXLE	TR	SPR	F0044
145	HB		3	L9	G	33BB	T0378
MADE IN U.S.A.		2201910076053				ULC	▽ 5U5A-3520472-AA

Figure A4. Vehicle Certification Label



TIRE AND LOADING INFORMATION

SEATING CAPACITY TOTAL : 5 FRONT: 2 REAR: 3

The combined weight of occupants and cargo should never exceed : **701 kg or 1546 lbs.**

▽ 5U5A-1532-AA (TLU)

TIRE	SIZE	COLD TIRE PRESSURE
FRONT	275/55R20 113T	240 KPA, 35 PSI
REAR	275/55R20 113T	240 KPA, 35 PSI
SPARE	265/70R17 115T	240 KPA, 35 PSI

**SEE OWNERS
MANUAL FOR
ADDITIONAL
INFORMATION**

1FTEW1E42LFA1



Figure A5. Tire Placard



Figure A6. Front View of Principal Other Vehicle



Figure A7. Rear View of Principal Other Vehicle



Figure A8. DGPS, Inertial Measurement Unit, and MicroAutoBox Installed in Subject Vehicle

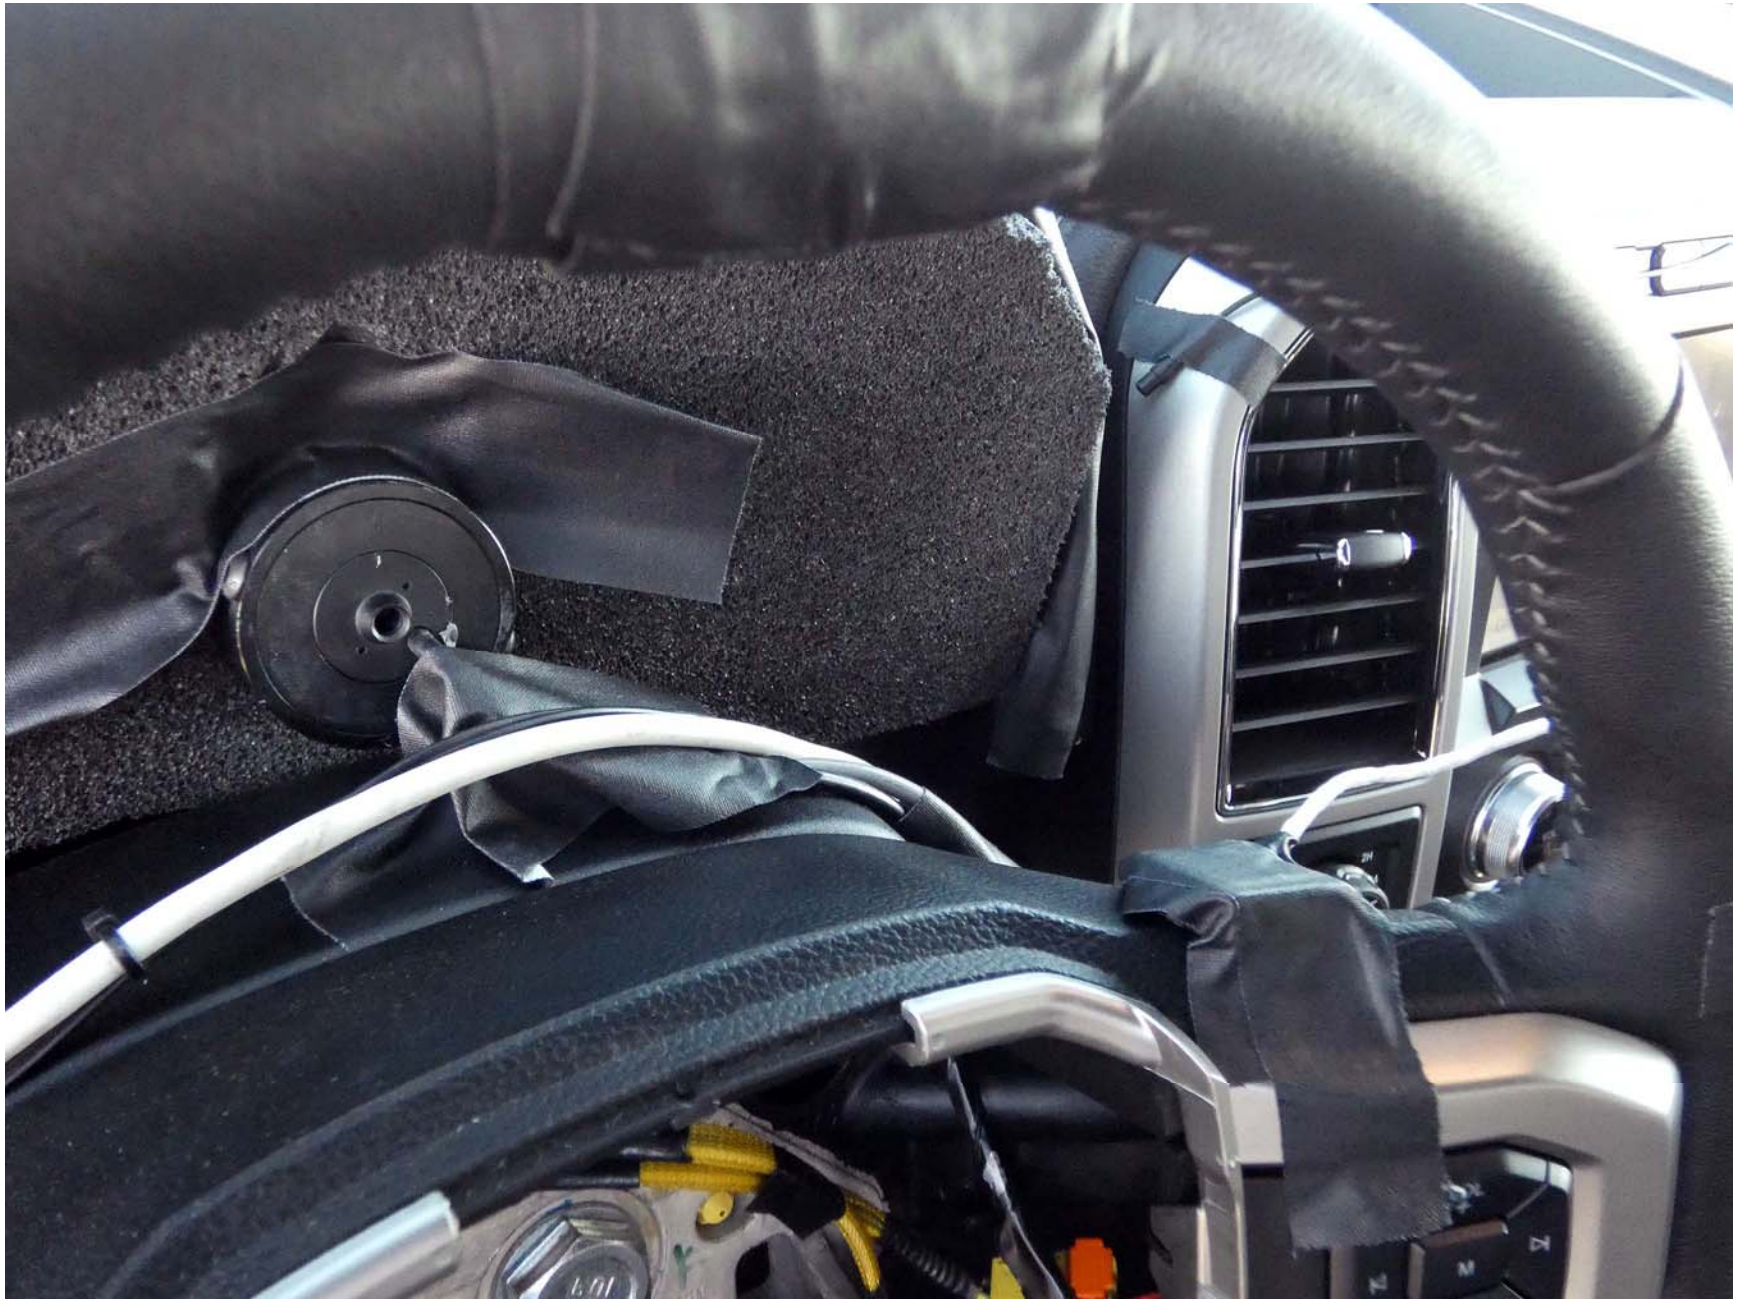


Figure A9. Sensor for Detecting Auditory and Visual Alerts



Figure A10. Computer Installed in Subject Vehicle



Figure A11. Brake Actuation System Installed in Principal Other Vehicle



Figure A12. System Setting Menus



Figure A13. Controls for Changing System Setup Parameters

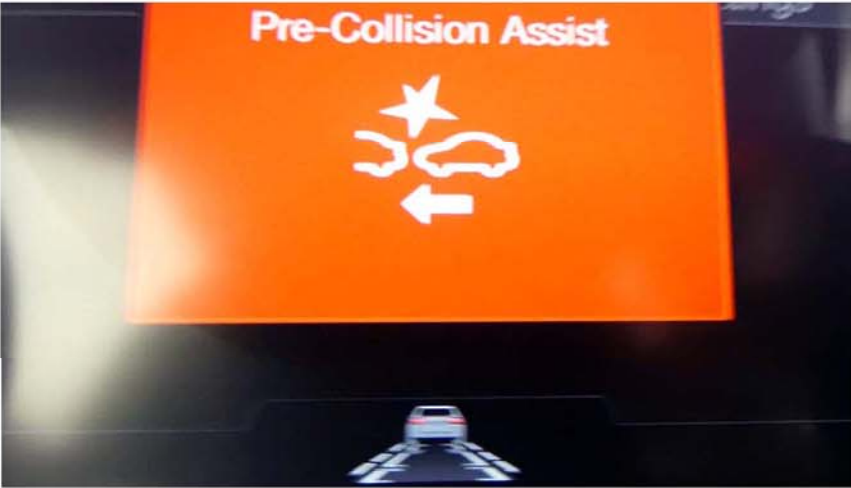


Figure A14. Visual Alert


APPENDIX B

Excerpts from Owner's Manual

Information Displays

Settings		
	MyKey	Enter the submenu and select your setting
	Display Setup	Units
		Temperature
		Tire Pressure
		Language

Information Display Controls (Type 3) (If Equipped)

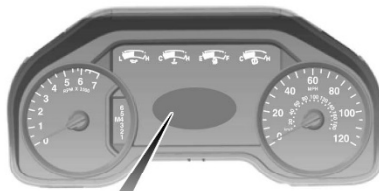

E176093

- Press the up and down arrow buttons to scroll through and highlight the options within a menu.
- Press the right arrow button to enter a sub-menu.


- Press the left arrow button to exit a menu.
- Press the **OK** button to choose and confirm a setting or messages.

Main menu

You can access the menus using the information display control.

-  My View
-  Trip/Fuel
-  Truck Info
-  Towing
-  Off Road
-  Settings

My View

-  Use the arrow buttons to choose between the following My View options.

Information Displays

Towing	
Con- nec- tion Check- list	Conventional
	Fifth Wheel
	Gooseneck

Off Road



Use the arrow buttons to choose between the following off road options.

Off Road	
Off Road Status	Pitch, Steering Angle, Roll, Elocker and 4X4
Power Distribution	

Settings



Use the arrow buttons to configure different driver setting choices.

Settings	
Auto Regen	
Cross Traffic Alert	
Driver Alert	
Rear Park Aid	
Trailer Blind Spot	
Pre-Collision	Enter the submenu for items such as alert sensitivity, distance indication and active braking
Cruise Control	Enter the submenu and select your setting
DTE Calcula- tion	Enter the submenu and select your setting

Information Displays

Message	Action
Park Brake Maintenance Mode	The electric park brake system has been put into a special mode that is used to allow service of the rear brakes. Contact an authorized dealer.
Park Brake Limited Function Service Required	The electric park brake system has detected a condition that requires service. Some functionality may still be available. Contact an authorized dealer.
Park Brake Malfunction Service Now	The electric park brake system has detected a condition that requires service. Contact an authorized dealer.

Power Steering

Message	Action
Steering Fault Service Now	The power steering system has detected a condition that requires service. See an authorized dealer.
Steering Loss Stop Safely	The power steering system is not working. Stop your vehicle in a safe place. Contact an authorized dealer.
Steering Assist Fault Service Required	The power steering system has detected a condition within the power steering system or passive entry or passive start system requires service. Contact an authorized dealer.
Steering Lock Malfunction Service Now	The steering lock system has detected a condition that requires service. See an authorized dealer.

Pre-Collision Assist

Message	Action
Pre-Collision Assist Not Available Sensor Blocked	You have a blocked sensor due to bad weather, ice, mud or water in front of the radar sensor. You can typically clean the sensor to resolve.
Pre-Collision Assist Not Available	A fault with the system has occurred. Contact an authorized dealer as soon as possible.

Driving Aids

Extreme continuous steering may increase the effort required for you to steer your vehicle, this increased effort prevents overheating and permanent damage to the steering system. You do not lose the ability to steer your vehicle manually. Typical steering and driving maneuvers allow the system to cool and return to normal operation.

Steering Tips

If the steering wanders or pulls, check for:


- Correct tire pressures.
- Uneven tire wear.
- Loose or worn suspension components.
- Loose or worn steering components.
- Improper vehicle alignment.


Note: *A high crown in the road or high crosswinds may also make the steering seem to wander or pull.*


Adaptive Learning (If Equipped)


The electronic power steering system adaptive learning helps correct road irregularities and improves overall handling and steering feel. It communicates with the brake system to help operate advanced stability control and accident avoidance systems. Additionally, whenever the battery is disconnected or a new battery installed, you must drive your vehicle a short distance before the system relearns the strategy and reactivates all systems.


PRE-COLLISION ASSIST

 **WARNING:** You are responsible for controlling your vehicle at all times. The system is designed to be an aid and does not relieve you of your responsibility to drive with due care and attention. Failure to follow this instruction could result in the loss of control of your vehicle, personal injury or death.

 **WARNING:** The system does not detect vehicles that are driving in a different direction, cyclists or animals. Failure to take care may result in the loss of control of your vehicle, serious personal injury or death.

 **WARNING:** The system does not operate during hard acceleration or steering. Failure to take care may lead to a crash or personal injury.

 **WARNING:** The system may fail or operate with reduced function during cold and severe weather conditions. Snow, ice, rain, spray and fog can adversely affect the system. Keep the front camera and radar free of snow and ice. Failure to take care may result in the loss of control of your vehicle, serious personal injury or death.

 **WARNING:** In situations where the vehicle camera has limited detection capability, this may reduce system performance. These situations include but are not limited to direct or low sunlight, vehicles at night without tail lights, unconventional vehicle types, pedestrians with complex backgrounds,

Driving Aids

partly obscured pedestrians, or pedestrians that the system cannot distinguish from a group. Failure to take care may result in the loss of control of your vehicle, serious personal injury or death.

⚠ WARNING: The system cannot help prevent all crashes. Do not rely on this system to replace driver judgment and the need to maintain a safe distance and speed.

Using the Pre-Collision Assist System


The Pre-Collision Assist system is active at speeds above approximately 3 mph (5 km/h) and pedestrian detection is active at speeds up to 50 mph (80 km/h).




E156130

If your vehicle is rapidly approaching another stationary vehicle, a vehicle traveling in the same direction as yours, or a pedestrian within your driving path, the system provides three levels of functionality:

1. Alert
2. Brake Support
3. Active Braking



E255268

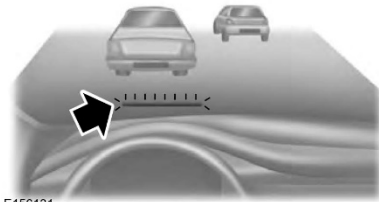

E156131

Alert: When active, a flashing visual warning appears and an audible warning tone sounds.

Brake Support: The system is designed to help reduce the impact speed by preparing the brakes for rapid braking. The system does not automatically apply the brakes. If you press the brake pedal, the system could apply additional braking up to maximum braking force, even if you lightly press the brake pedal.

Active Braking: Active braking may activate if the system determines that a collision is imminent. The system may help the driver reduce impact damage or avoid the crash completely.

Note: *Brake Support and Active Braking are active at speeds up to 75 mph (120 km/h). If the vehicle has a radar sensor or Adaptive Cruise Control, then Brake Support and Active Braking are active up to the maximum speed of the vehicle.*

Note: *If you perceive Pre-Collision Assist alerts as being too frequent or disturbing, then you can reduce the alert sensitivity, though the manufacturer recommends using the highest sensitivity setting where possible. Setting lower sensitivity would lead to fewer and later system warnings.*

Note: *The Pre-Collision Assist system automatically disables when you select 4X4 LOW or when you manually disable AdvanceTrac™.*

Driving Aids

Distance Indication and Alert (If Equipped)

Distance Indication and Alert is a function that provides the driver with a graphical indication of the time gap to other preceding vehicles traveling in the same direction. The Distance Indication and Alert screen in the display screen shows one of the graphics that follow.



E254791

If the time gap to a preceding vehicle is small, a red visual indication displays.

Note: *Distance Indication and Alert deactivates and the graphics do not display when Adaptive Cruise Control is active.*

Speed	Sensitivity	Graphics	Distance Gap	Time Gap
62 mph (100 km/h)	Normal	Grey	>82 ft (25 m)	>0.9sec
62 mph (100 km/h)	Normal	Yellow	56–82 ft (17–25 m)	0.6sec – 0.9sec
62 mph (100 km/h)	Normal	Red	<56 ft (17 m)	<0.6sec

Driving Aids

Adjusting the Pre-Collision Assist Settings


You can adjust the following settings by using the information display controls. See **General Information** (page 120).

- You can change Alert and Distance Alert sensitivity to one of three possible settings.
- You can switch Distance Indication and Alert on or off.
- If required, you can switch Active Braking on or off.
- If required, you can switch the entire Pre-Collision Assist feature on or off.

Note: Active braking automatically turns on every time you switch the ignition on.

Note: If your vehicle has a radar sensor, we recommend that you switch the system off if you install a snow plow or similar object in such a way that it may block the radar sensor. Your vehicle remembers the selected setting across key cycles.

Blocked Sensors



- 1 Camera.
- 2 Radar sensor (if equipped).

If a message regarding a blocked sensor or camera appears in the information display, the radar signals or camera images are obstructed. If your vehicle has a radar sensor, it is located behind the fascia cover in the center of the lower grille. With a blocked sensor or camera, the Pre-Collision Assist system may not function, or performance may reduce. The following table lists possible causes and actions for when this message displays.

Camera Troubleshooting

Cause	Action
The windshield in front of the camera is dirty or obstructed in some way.	Clean the outside of the windshield in front of the camera.
The windshield in front of the camera is clean but the message remains in the display screen.	Wait a short time. It may take several minutes for the camera to detect that there is no obstruction.

Driving Aids

Radar Troubleshooting (If Equipped)

Cause	Action
The surface of the radar in the grille is dirty or obstructed in some way.	Clean the grille surface in front of the radar or remove the object causing the obstruction.
The surface of the radar in the grille is clean but the message remains in the display screen.	Wait a short time. It may take several minutes for the radar to detect that there is no obstruction.
Heavy rain, spray, snow or fog is interfering with the radar signals.	The Pre-Collision Assist system is temporarily disabled. Pre-Collision Assist automatically reactivates a short time after the weather conditions improve.
Swirling water or snow or ice on the surface of the road may interfere with the radar signals.	The Pre-Collision Assist system is temporarily disabled. Pre-Collision Assist automatically reactivates a short time after the weather conditions improve.
Radar is out of alignment due to a front end impact.	Contact an authorized dealer to have the radar checked for proper coverage and operation.

Note: Proper system operation requires a clear view of the road by the camera. Have any windshield damage in the area of the camera's field of view repaired.

Note: If something hits the front end of your vehicle or damage occurs and your vehicle has a radar sensor, the radar sensing zone may change. This could cause missed or false vehicle detections. Contact an authorized dealer to have the radar checked for proper coverage and operation.

Note: If your vehicle detects excessive heat at the camera or a potential misalignment condition, a message may display in the information display indicating temporary sensor unavailability. When operational conditions are correct, the message deactivates. For example, when the ambient temperature around the sensor decreases or the sensor automatically recalibrates successfully.

DRIVE CONTROL

Selectable Drive Modes

This provides a single location to control multiple system performance settings such as steering, handling and powertrain response.

Changing the drive mode automatically changes the functionality of the following systems:

APPENDIX C

Run Log

Subject Vehicle: **2020 Ford F-150 4X4 SuperCrew**

Test Date: **5/18/2020**

Principal Other Vehicle: **2006 Acura RL**

Run	Test Type	Valid Run?	TTCW Sound (sec)	TTCW Light (sec)	TTCW Margin (sec)	Pass/Fail	Notes
1	Stopped POV	Y	2.56	1.97	0.46	Pass	
2		Y	2.60	1.90	0.50	Pass	
3		N					Lateral offset
4		Y	2.61	1.86	0.51	Pass	
5		Y	2.62	2.05	0.52	Pass	
6		Y	2.61	2.06	0.51	Pass	
7		Y	2.59	2.00	0.49	Pass	
8		Y	2.57	1.98	0.47	Pass	
16	Decelerating POV, 45	Y	2.84	2.22	0.44	Pass	
17		Y	2.76	2.01	0.36	Pass	
18		Y	2.83	2.19	0.43	Pass	
19		Y	2.74	1.98	0.34	Pass	
20		Y	2.81	2.24	0.41	Pass	
21		Y	2.80	2.29	0.40	Pass	
22		Y	2.74	2.04	0.34	Pass	

Run	Test Type	Valid Run?	TTCW Sound (sec)	TTCW Light (sec)	TTCW Margin (sec)	Pass/Fail	Notes
9	Slower POV, 45 vs 20	Y	2.49	1.95	0.49	Pass	
10		Y	2.56	1.96	0.56	Pass	
11		Y	2.52	1.88	0.52	Pass	
12		Y	2.60	2.05	0.60	Pass	
13		Y	2.54	1.85	0.54	Pass	
14		Y	2.56	2.01	0.56	Pass	
15		Y	2.59	1.79	0.59	Pass	

APPENDIX D

Time History Plots

LIST OF FIGURES

	Page
Figure D1. Example Time History for Test Type 1, Passing	D-8
Figure D2. Example Time History for Test Type 1, Failing	D-9
Figure D3. Example Time History for Test Type 2, Passing	D-10
Figure D4. Example Time History for Test Type 2, Failing	D-11
Figure D5. Example Time History for Test Type 3, Passing	D-12
Figure D6. Example Time History Showing Invalid Lateral Offset Criteria.....	D-13
Figure D7. Time History for Run 1, FCW Test 1, Audible Warning	D-14
Figure D8. Time History for Run 1, FCW Test 1, Visual Warning.....	D-15
Figure D9. Time History for Run 2, FCW Test 1, Audible Warning	D-16
Figure D10. Time History for Run 2, FCW Test 1, Visual Warning.....	D-17
Figure D11. Time History for Run 4, FCW Test 1, Audible Warning.....	D-18
Figure D12. Time History for Run 4, FCW Test 1, Visual Warning.....	D-19
Figure D13. Time History for Run 5, FCW Test 1, Audible Warning.....	D-20
Figure D14. Time History for Run 5, FCW Test 1, Visual Warning.....	D-21
Figure D15. Time History for Run 6, FCW Test 1, Audible Warning.....	D-22
Figure D16. Time History for Run 6, FCW Test 1, Visual Warning.....	D-23
Figure D17. Time History for Run 7, FCW Test 1, Audible Warning.....	D-24
Figure D18. Time History for Run 7, FCW Test 1, Visual Warning.....	D-25
Figure D19. Time History for Run 8, FCW Test 1, Audible Warning.....	D-26
Figure D20. Time History for Run 8, FCW Test 1, Visual Warning.....	D-27
Figure D21. Time History for Run 16, FCW Test 2, Audible Warning.....	D-28
Figure D22. Time History for Run 16, FCW Test 2, Visual Warning.....	D-29
Figure D23. Time History for Run 17, FCW Test 2, Audible Warning.....	D-30
Figure D24. Time History for Run 17, FCW Test 2, Visual Warning.....	D-31
Figure D25. Time History for Run 18, FCW Test 2, Audible Warning.....	D-32
Figure D26. Time History for Run 18, FCW Test 2, Visual Warning.....	D-33
Figure D27. Time History for Run 19, FCW Test 2, Audible Warning.....	D-34
Figure D28. Time History for Run 19, FCW Test 2, Visual Warning.....	D-35
Figure D29. Time History for Run 20, FCW Test 2, Audible Warning.....	D-36
Figure D30. Time History for Run 20, FCW Test 2, Visual Warning.....	D-37
Figure D31. Time History for Run 21, FCW Test 2, Audible Warning.....	D-38
Figure D32. Time History for Run 21, FCW Test 2, Visual Warning.....	D-39
Figure D33. Time History for Run 22, FCW Test 2, Audible Warning.....	D-40
Figure D34. Time History for Run 22, FCW Test 2, Visual Warning.....	D-41
Figure D35. Time History for Run 9, FCW Test 3, Audible Warning.....	D-42
Figure D36. Time History for Run 9, FCW Test 3, Visual Warning.....	D-43
Figure D37. Time History for Run 10, FCW Test 3, Audible Warning.....	D-44
Figure D38. Time History for Run 10, FCW Test 3, Visual Warning.....	D-45
Figure D39. Time History for Run 11, FCW Test 3, Audible Warning.....	D-46
Figure D40. Time History for Run 11, FCW Test 3, Visual Warning.....	D-47
Figure D41. Time History for Run 12, FCW Test 3, Audible Warning.....	D-48

Figure D42. Time History for Run 12, FCW Test 3, Visual Warning.....	D-49
Figure D43. Time History for Run 13, FCW Test 3, Audible Warning.....	D-50
Figure D44. Time History for Run 13, FCW Test 3, Visual Warning.....	D-51
Figure D45. Time History for Run 14, FCW Test 3, Audible Warning.....	D-52
Figure D46. Time History for Run 14, FCW Test 3, Visual Warning.....	D-53
Figure D47. Time History for Run 15, FCW Test 3, Audible Warning.....	D-54
Figure D48. Time History for Run 15, FCW Test 3, Visual Warning.....	D-55

Description of Time History Plots

A set of time history plots is provided for each valid run in the test series. Each set of plots comprises time varying data from both the Subject Vehicle (SV) and the Principal Other Vehicle (POV), as well as pass/fail envelopes and thresholds. The following is a description of data types shown in the time history plots, as well as a description of the color code indicating to which vehicle the data pertain.

Each time history plot consists of data pertinent to the test type under consideration, and therefore the data channels plotted vary according to test type. The test types (shown in the plot titles) include:

- FCW Test 1 – Stopped POV (SV at 45 mph)
- FCW Test 2 – Decelerating POV (Both vehicles at 45 mph with a 30 m gap, POV brakes at 0.3 g)
- FCW Test 3 – Slower Moving POV (SV at 45 mph, POV at 20 mph)

Time history figures include the following sub-plots:

- Warning – Displays the Forward Collision Warning Alert (which can be audible, visual, or haptic). Depending on the type of FCW alert or instrumentation used to measure the alert, this can be any of the following:
 - Filtered, rectified, and normalized sound signal. The vertical scale is 0 to 1.
 - Filtered, rectified, and normalized acceleration (e.g., haptic alert, such as steering wheel vibration). The vertical scale is 0 to 1.
 - Light sensor signal
- TTC (sec) – Indicates the Time to Collision as calculated up to the point of FCW alert issuance. The value of TTCW (Time to Collision at Warning) is given numerically on the right side of the figure. A passing value is indicated in green, while a failing value is indicated in red.
- SV Speed (mph) – Speed of the Subject Vehicle
- POV Speed (mph) – Speed of the Principal Other Vehicle
- Yaw Rate (deg/sec) – Yaw rate of both the Subject Vehicle and Principal Other Vehicle

- Lateral Offset (ft) – Lateral offset within the lane from the Subject Vehicle to the Principal Other Vehicle
- Ax (g) – Longitudinal acceleration of both the Subject Vehicle and Principal Other Vehicle
- Headway (ft) – Longitudinal separation between front of Subject Vehicle to rear of Principal Other Vehicle (Exclusive to test type 2)

Note that the minimum (worst) GPS fix type is displayed in the lower right corner of each page. The only valid fix type is RTK fixed (displayed in green). If the fix type during any portion of the test was anything other than RTK fixed, then “RTK Fixed OR LESS!!” is displayed in red.

Envelopes and Thresholds

Each of the time history plot figures can contain either green or yellow envelopes and/or black threshold lines. These envelopes and thresholds are used to programmatically and visually determine the validity of a given test run. Envelope and threshold exceedances are indicated with either red shading or red asterisks, and red text is placed to the right side of the plot indicating the type of exceedance.

Green envelopes indicate that the time-varying data should not exceed the envelope boundaries at any time within the envelope. Exceedances of a green envelope are indicated by red shading in the area between the measured time-varying data and the envelope boundaries.

Yellow envelopes indicate that the time-varying data should not exceed the envelope only at the left and/or right ends. Exceedances at the left or right extent of a yellow envelope are indicated by red asterisks.

For the warning plot, a dashed black threshold line indicates the threshold used to determine the onset of the FCW alert. The alert is considered on the first time the alert signal crosses this threshold line.

For the TTC plot, a dashed black threshold line indicates the minimum allowable TTC for the given test scenario. If the FCW alert occurs before this minimum allowable TTC, a green dot appears. However, if there is no alert or the alert occurs after the minimum allowable TTC, a red asterisk is shown on the plot.

For the Ax plot, a dashed black threshold line is given for at a value of -0.05 g. For a test run to be valid, the longitudinal acceleration of the Subject Vehicle must not fall below this threshold (i.e. the driver cannot apply any brakes). Additionally, for test type 2, the plot indicating the longitudinal acceleration of the Principal Other Vehicle

includes a yellow envelope indicating the deceleration ($0.3 \text{ g} \pm 0.03 \text{ g}$) allowed while braking. Exceedance of this threshold is indicated with red asterisks at the beginning and/or end of the threshold boundary.

Color Codes

Color codes have been adopted to easily identify which data correspond to which vehicle, as well as to indicate the types of envelopes and thresholds used in the plots.

Color codes can be broken into four categories:

1. Time-varying data
2. Validation envelopes and thresholds
3. Instantaneous samplings
4. Text

1. Time-varying data color codes:

- Blue = Subject Vehicle data
- Magenta = Principal Other Vehicle data
- Brown = Relative data between SV and POV (i.e., TTC, lateral offset and headway distance)

2. Validation envelope and threshold color codes:

- Green envelope = time varying data must be within the envelope at all times in order to be valid
- Yellow envelope = time varying data must be within limits at left and/or right ends
- Black threshold (Solid) = time varying data must not exceed this threshold in order to be valid
- Black threshold (Dashed) = for reference only – this can include warning level thresholds, TTC thresholds, and acceleration thresholds

3. Instantaneous sampling color codes:

- Green circle = passing or valid value at a given moment in time
- Red asterisk = failing or invalid value at a given moment in time

4. Text color codes:

- Green = passing or valid value
- Red = failing or invalid value

Other Notations

- ENV – For Ax plots only, indicates that the envelope for the POV braking was exceeded.
- NG – Indicates that the value for that variable was outside of bounds and therefore “No Good”.
- No Wng – No warning was detected.
- POV – Indicates that the value for the Principal Other Vehicle was out of bounds.
- SV – Indicates that the value for the Subject Vehicle was out of bounds.
- SR – Shows the speed reduction value.
- Thr – Indicates that the requirements for the throttle were not met.

The minimum (worst) GPS fix type is displayed in the lower right corner of each page. The only valid fix type is RTK fixed (displayed in green). If the fix type during any portion of the test was anything other than RTK fixed, then “RTK Fixed OR LESS!!” is displayed in red.

Examples of time history plots for each test type (including passing, failing and invalid runs) are shown in Figure D1 through Figure D6. Actual time history data plots for the vehicle under consideration are provided subsequently.

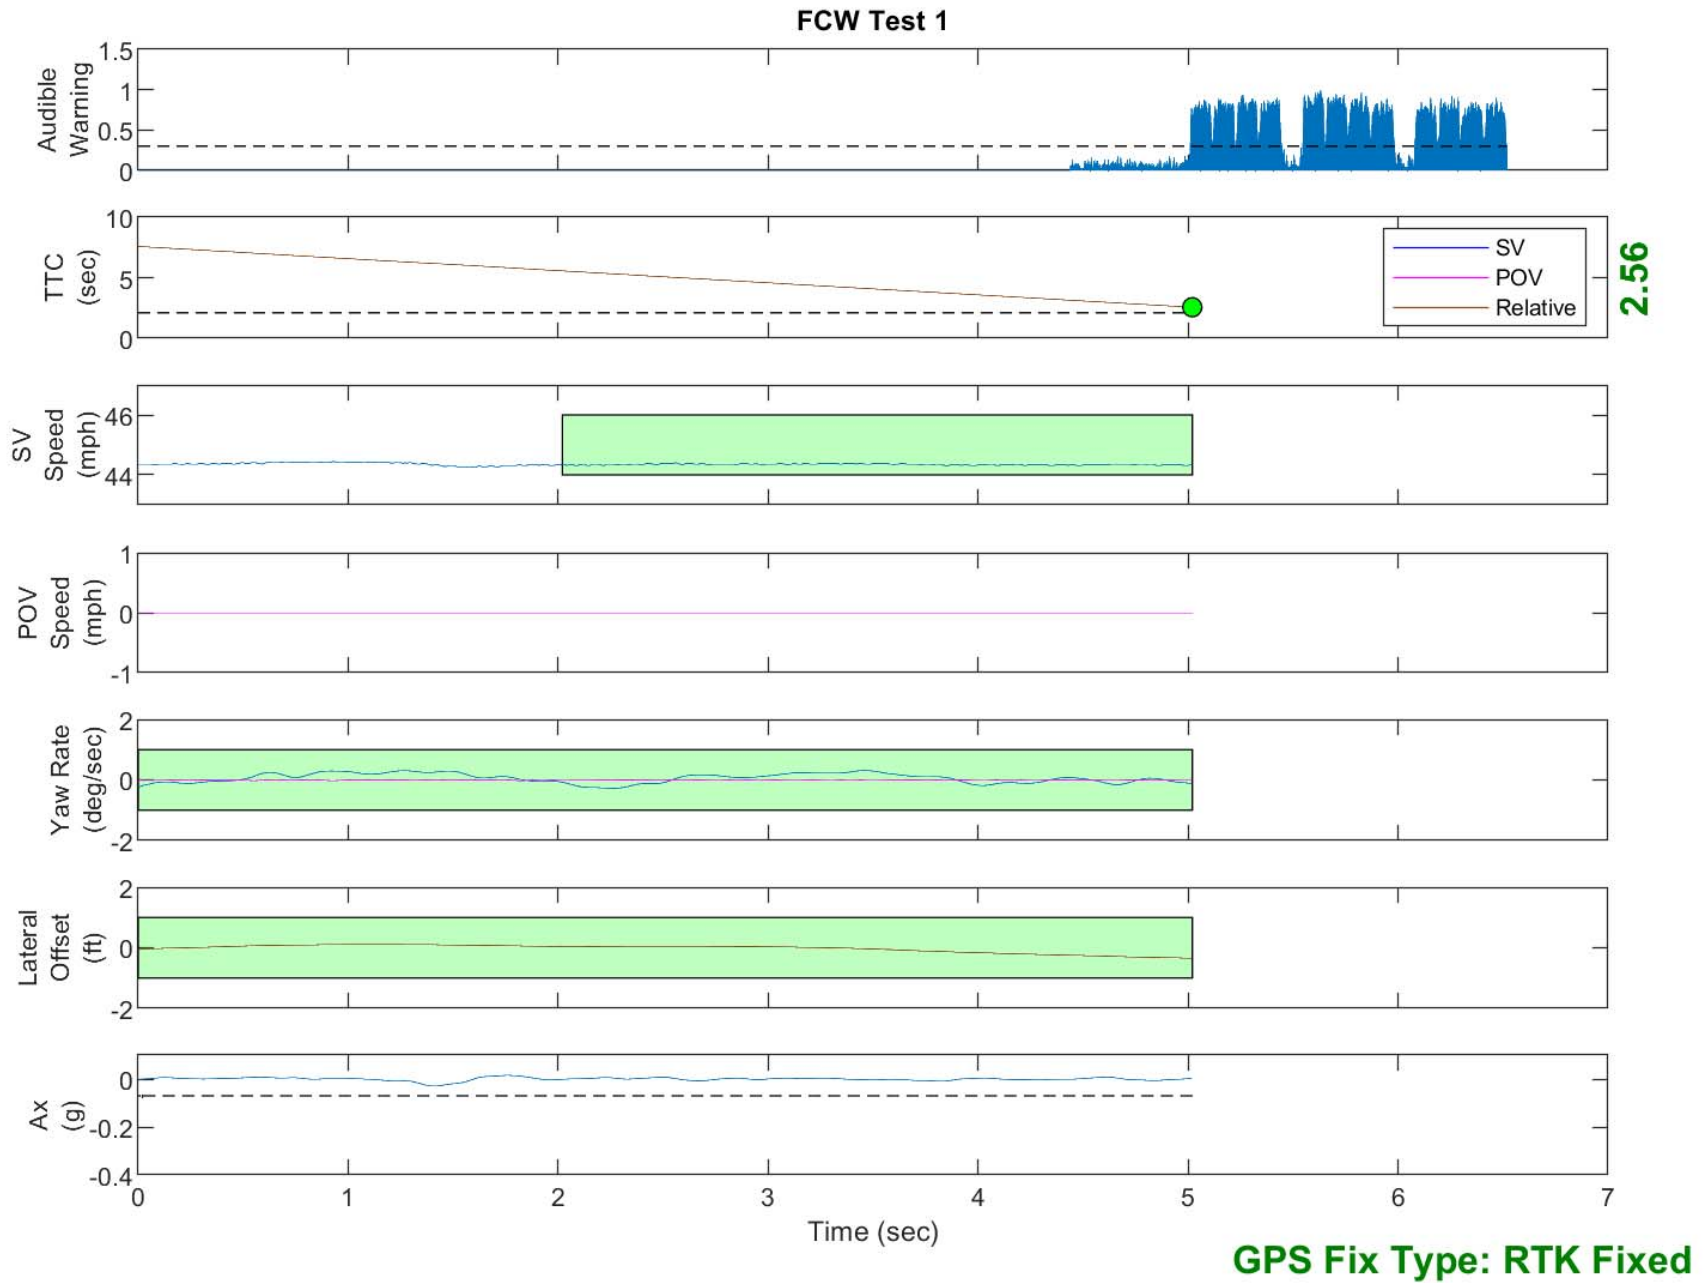


Figure D1. Example Time History for Test Type 1, Passing



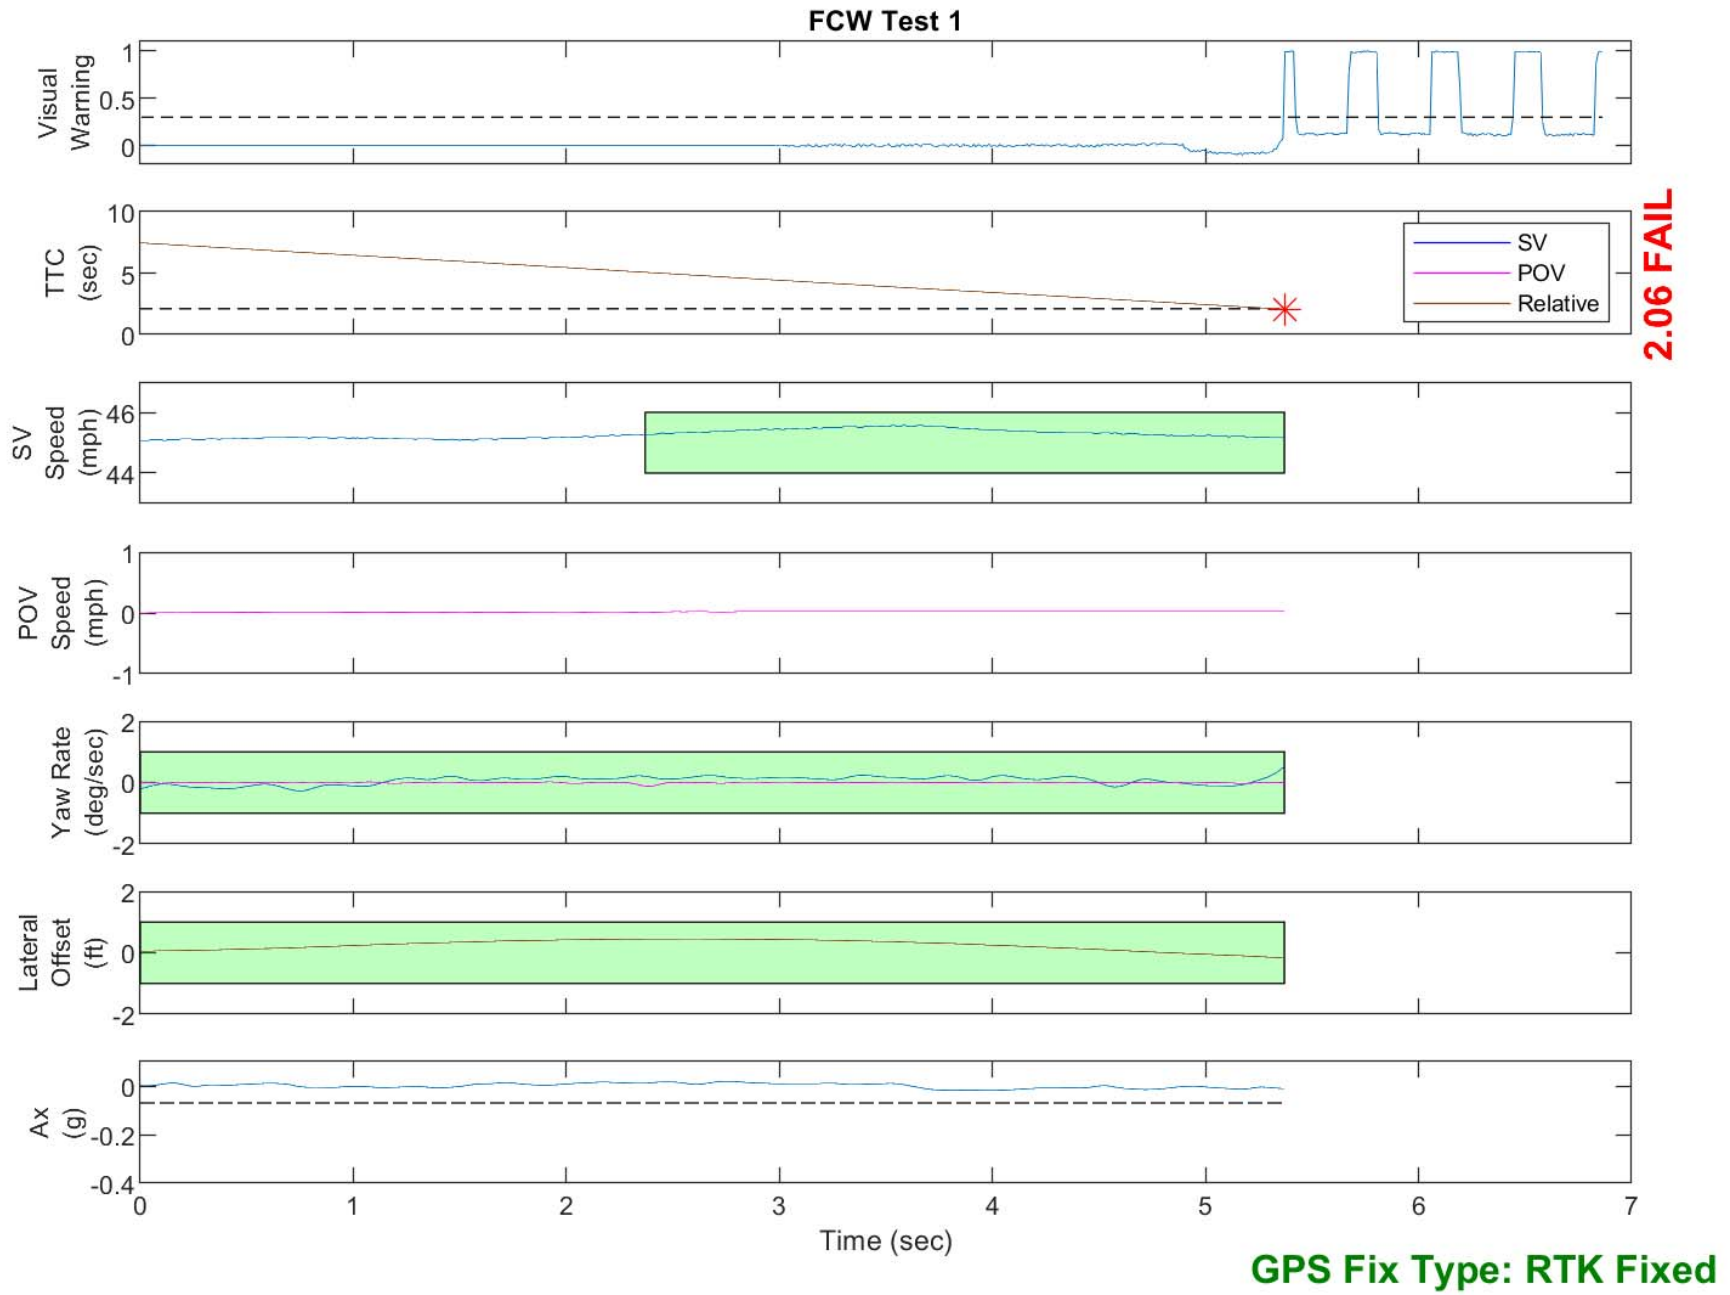


Figure D2. Example Time History for Test Type 1, Failing

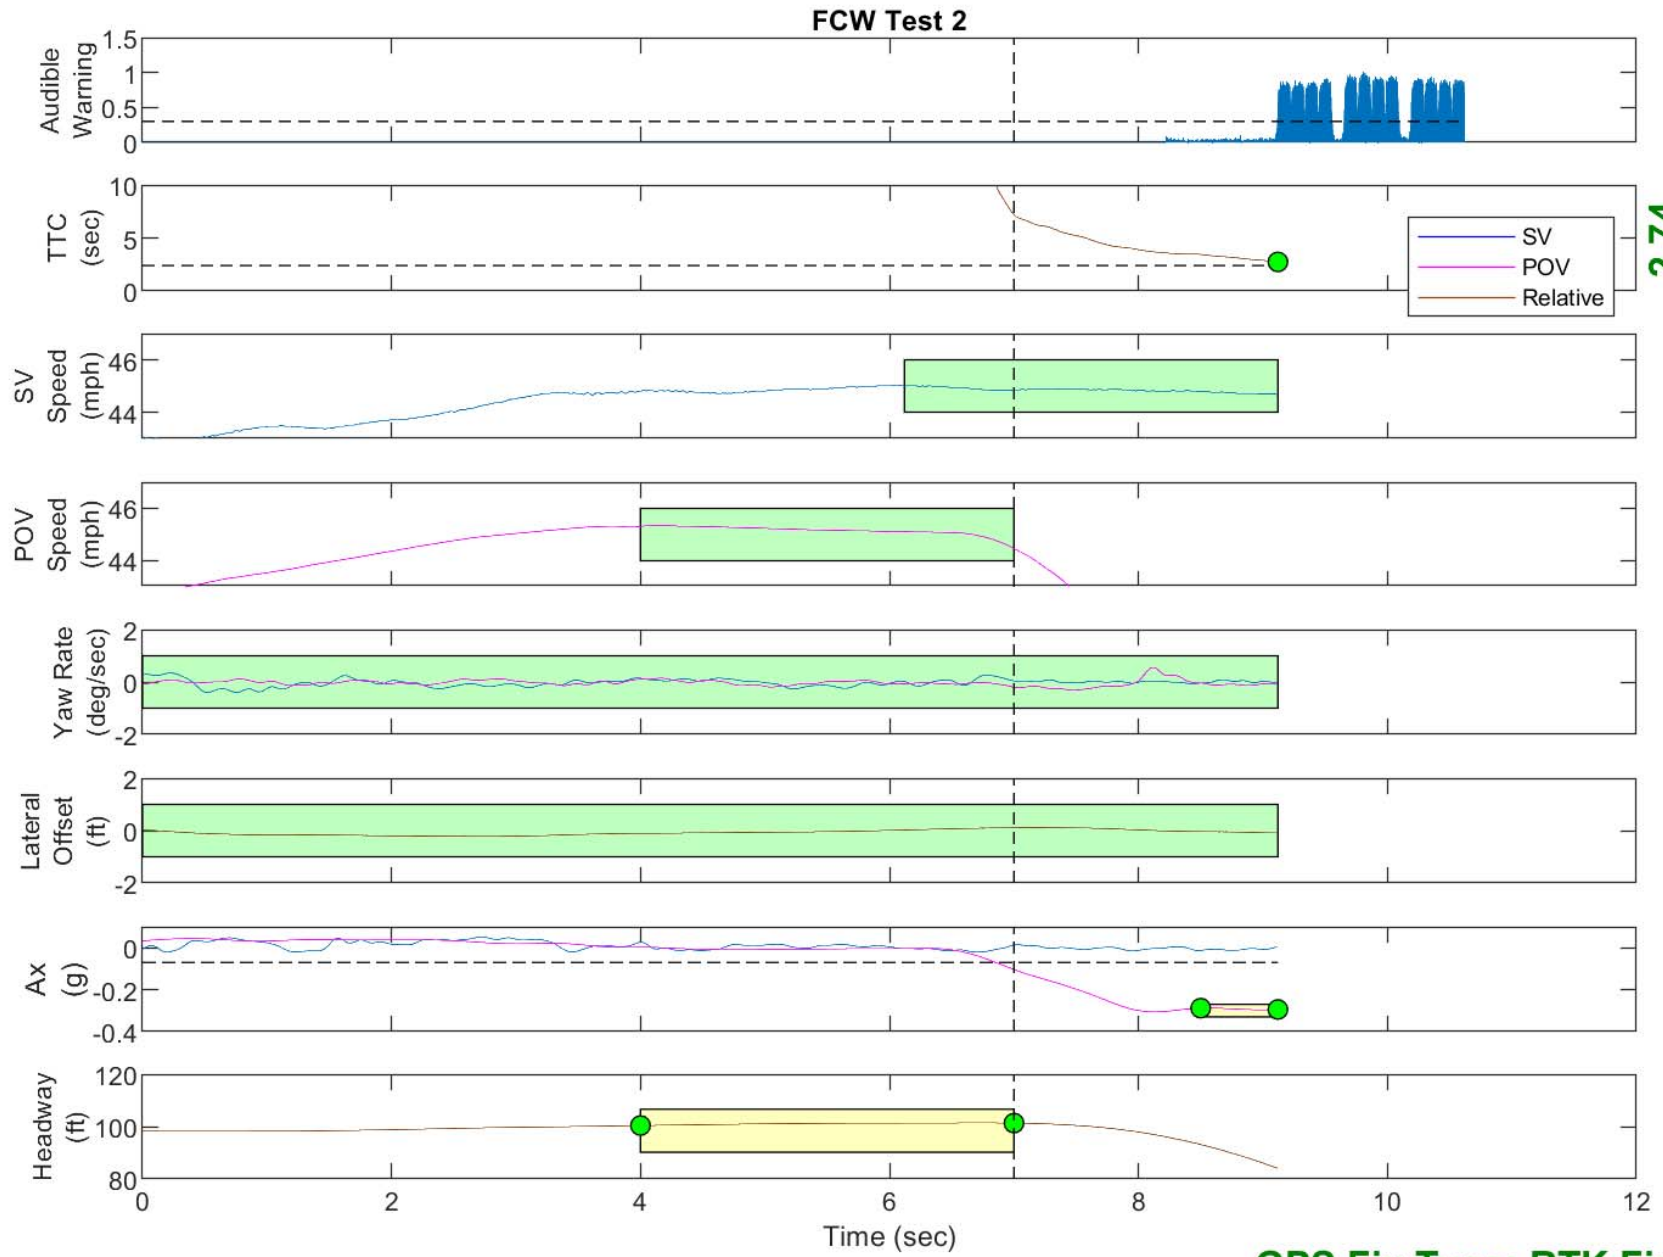

GPS Fix Type: RTK Fixed


Figure D3. Example Time History for Test Type 2, Passing

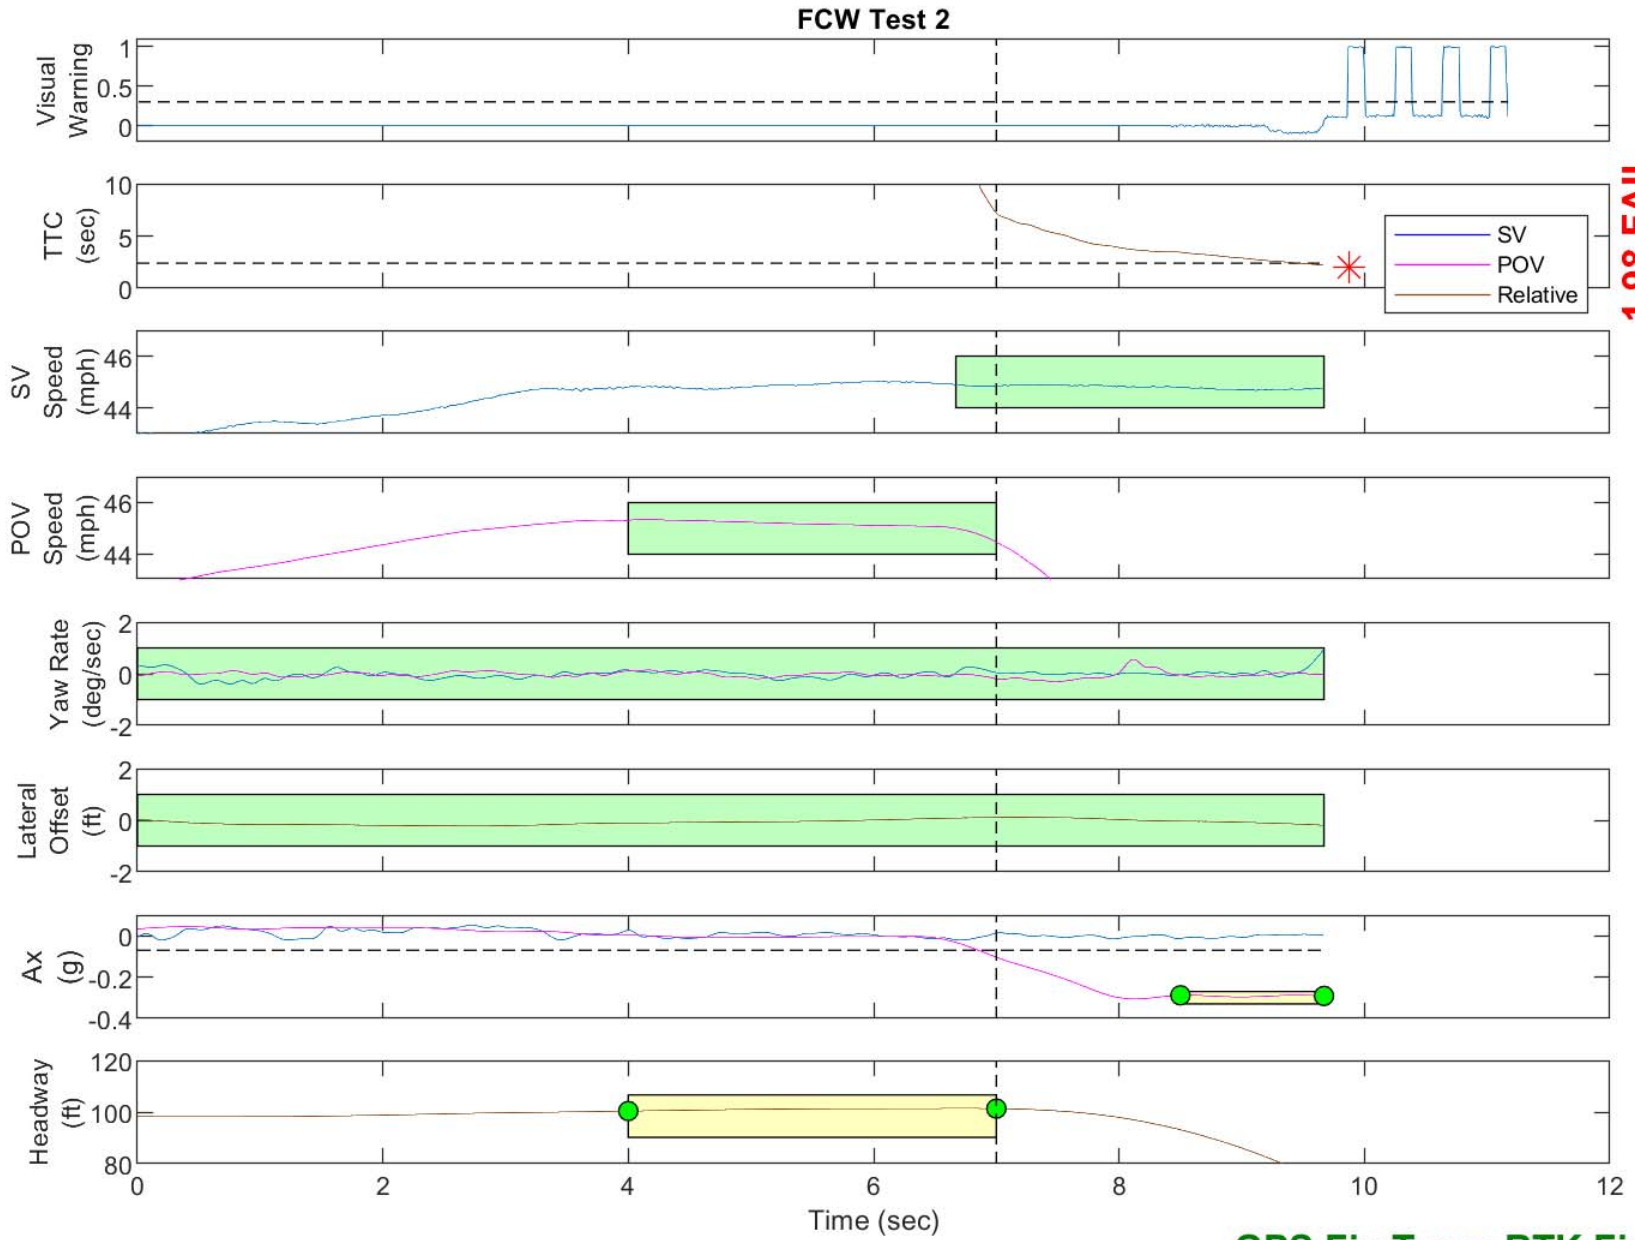

1.98 FAIL

GPS Fix Type: RTK Fixed

Figure D4. Example Time History for Test Type 2, Failing

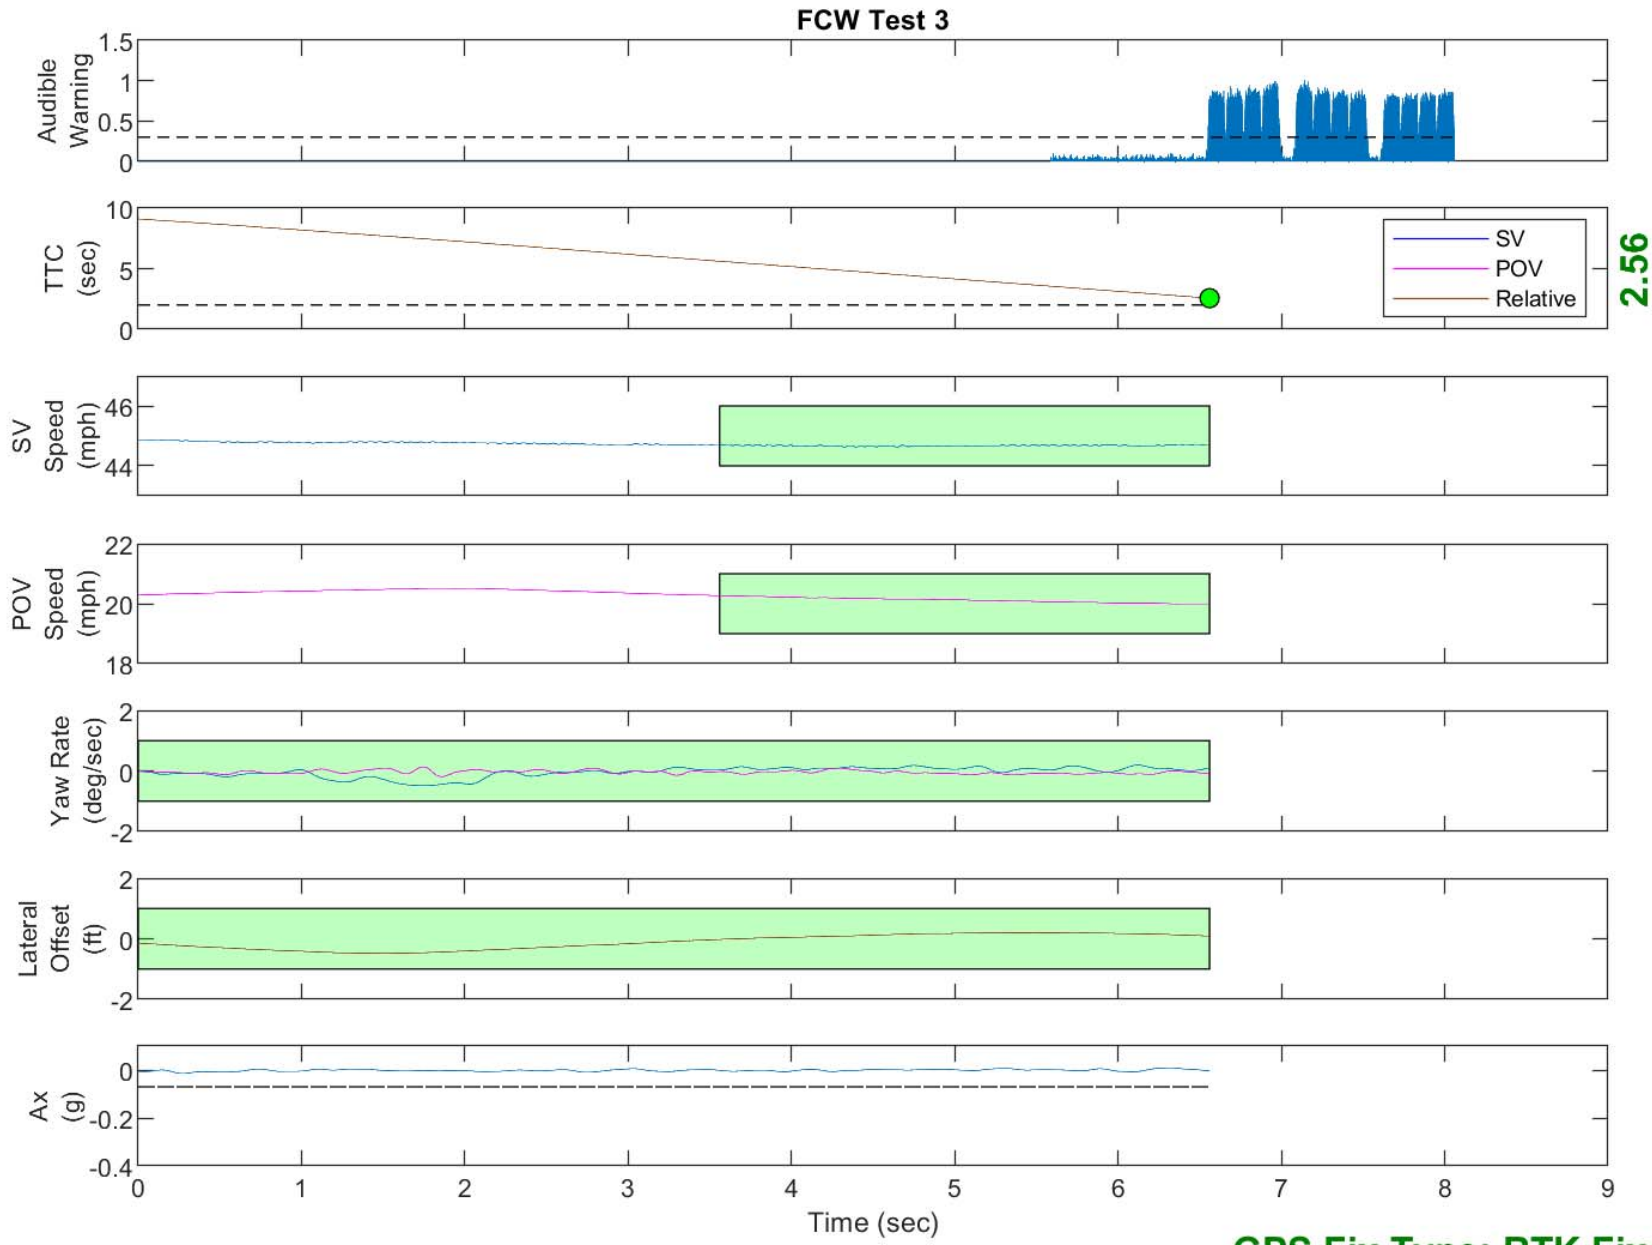

2.56

GPS Fix Type: RTK Fixed

Figure D5. Example Time History for Test Type 3, Passing

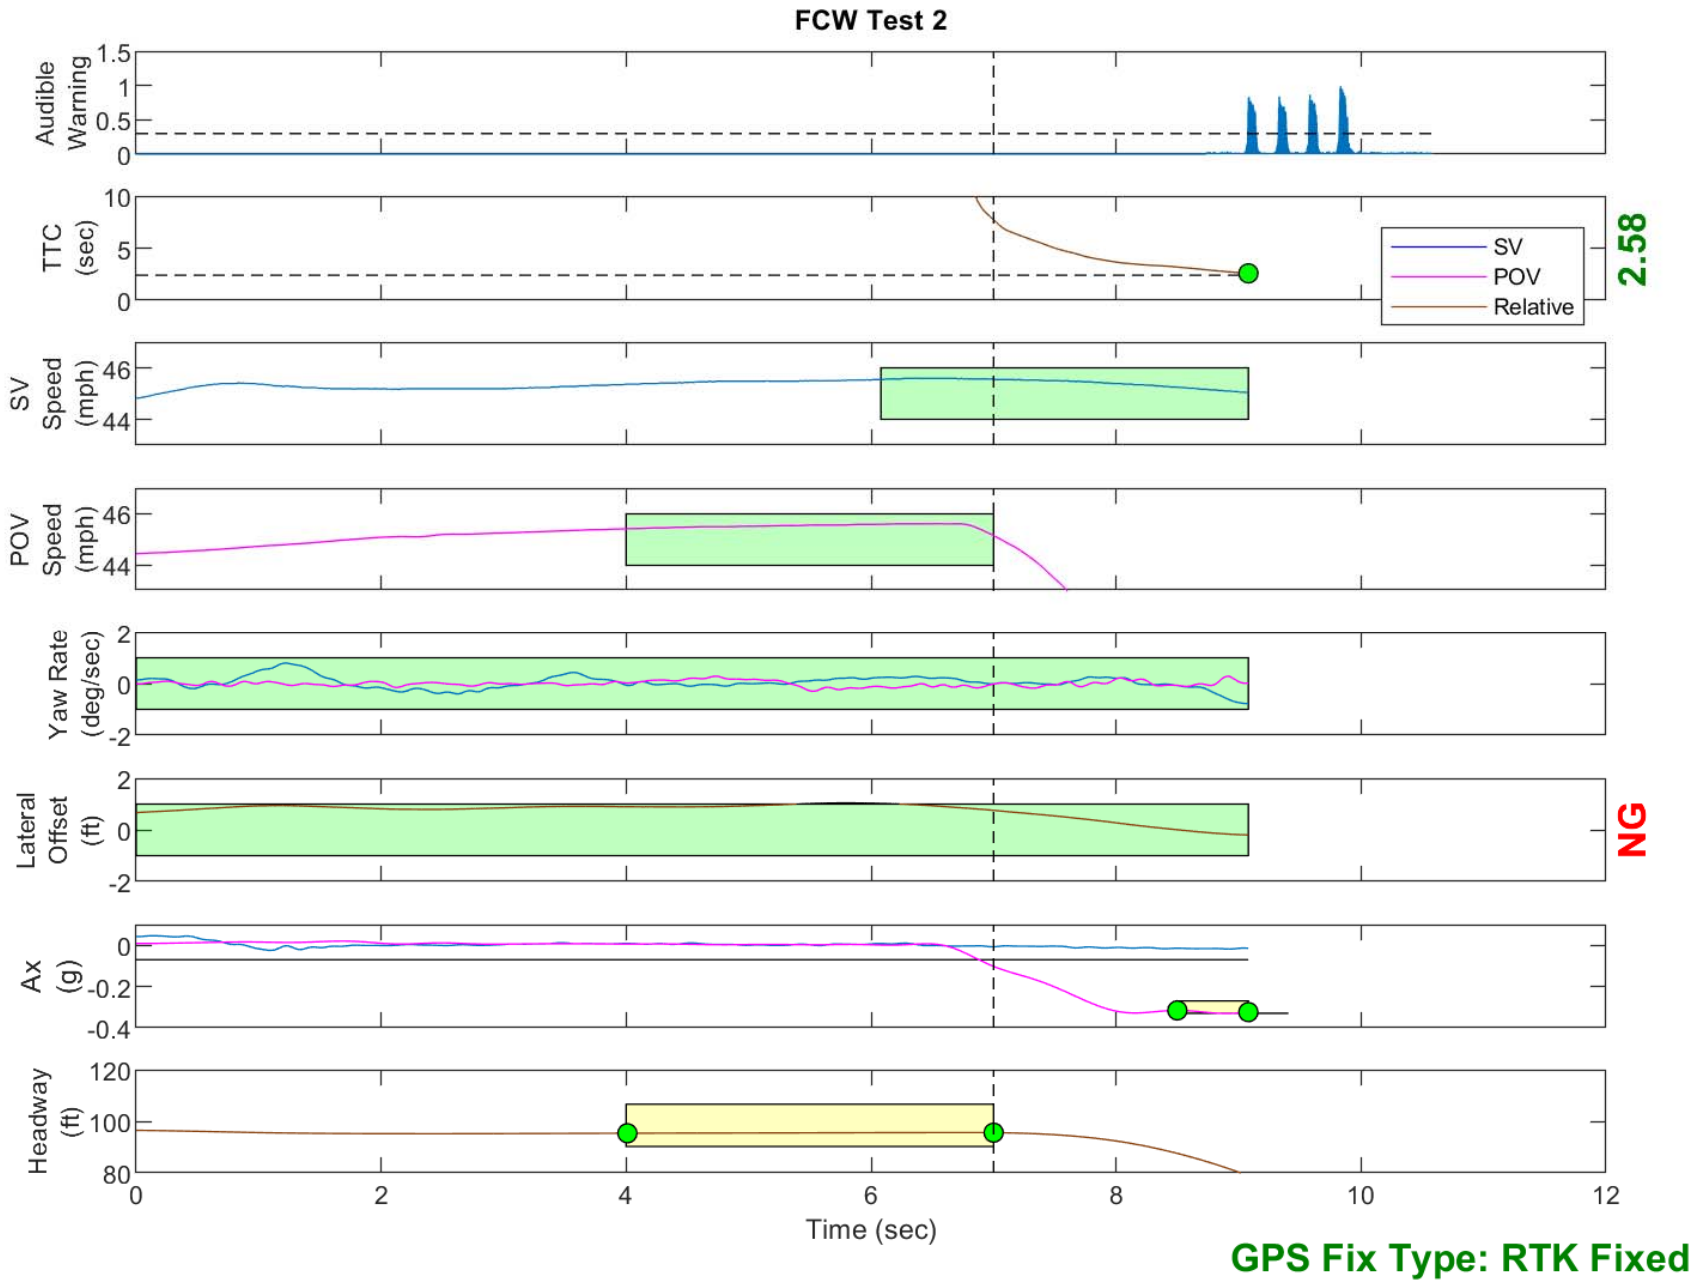


Figure D6. Example Time History Showing Invalid Lateral Offset Criteria

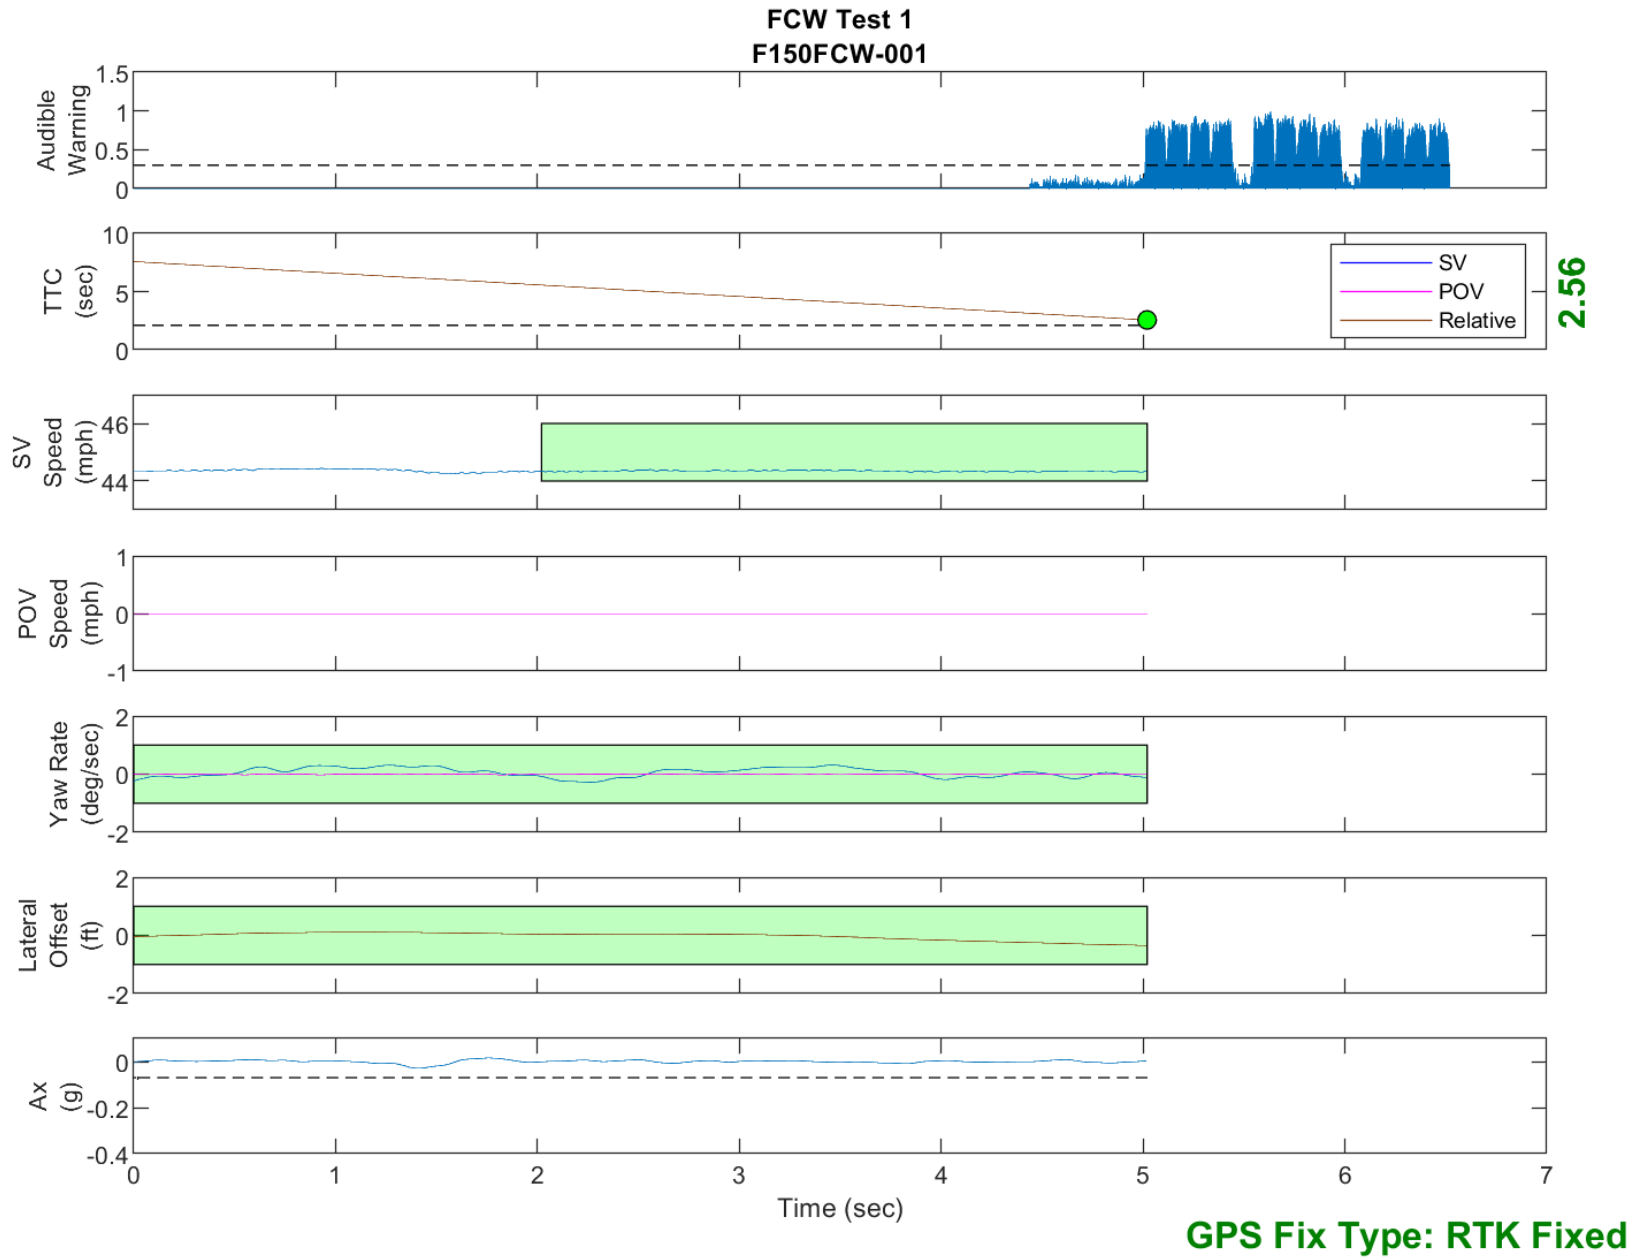


Figure D7. Time History for Run 1, FCW Test 1, Audible Warning

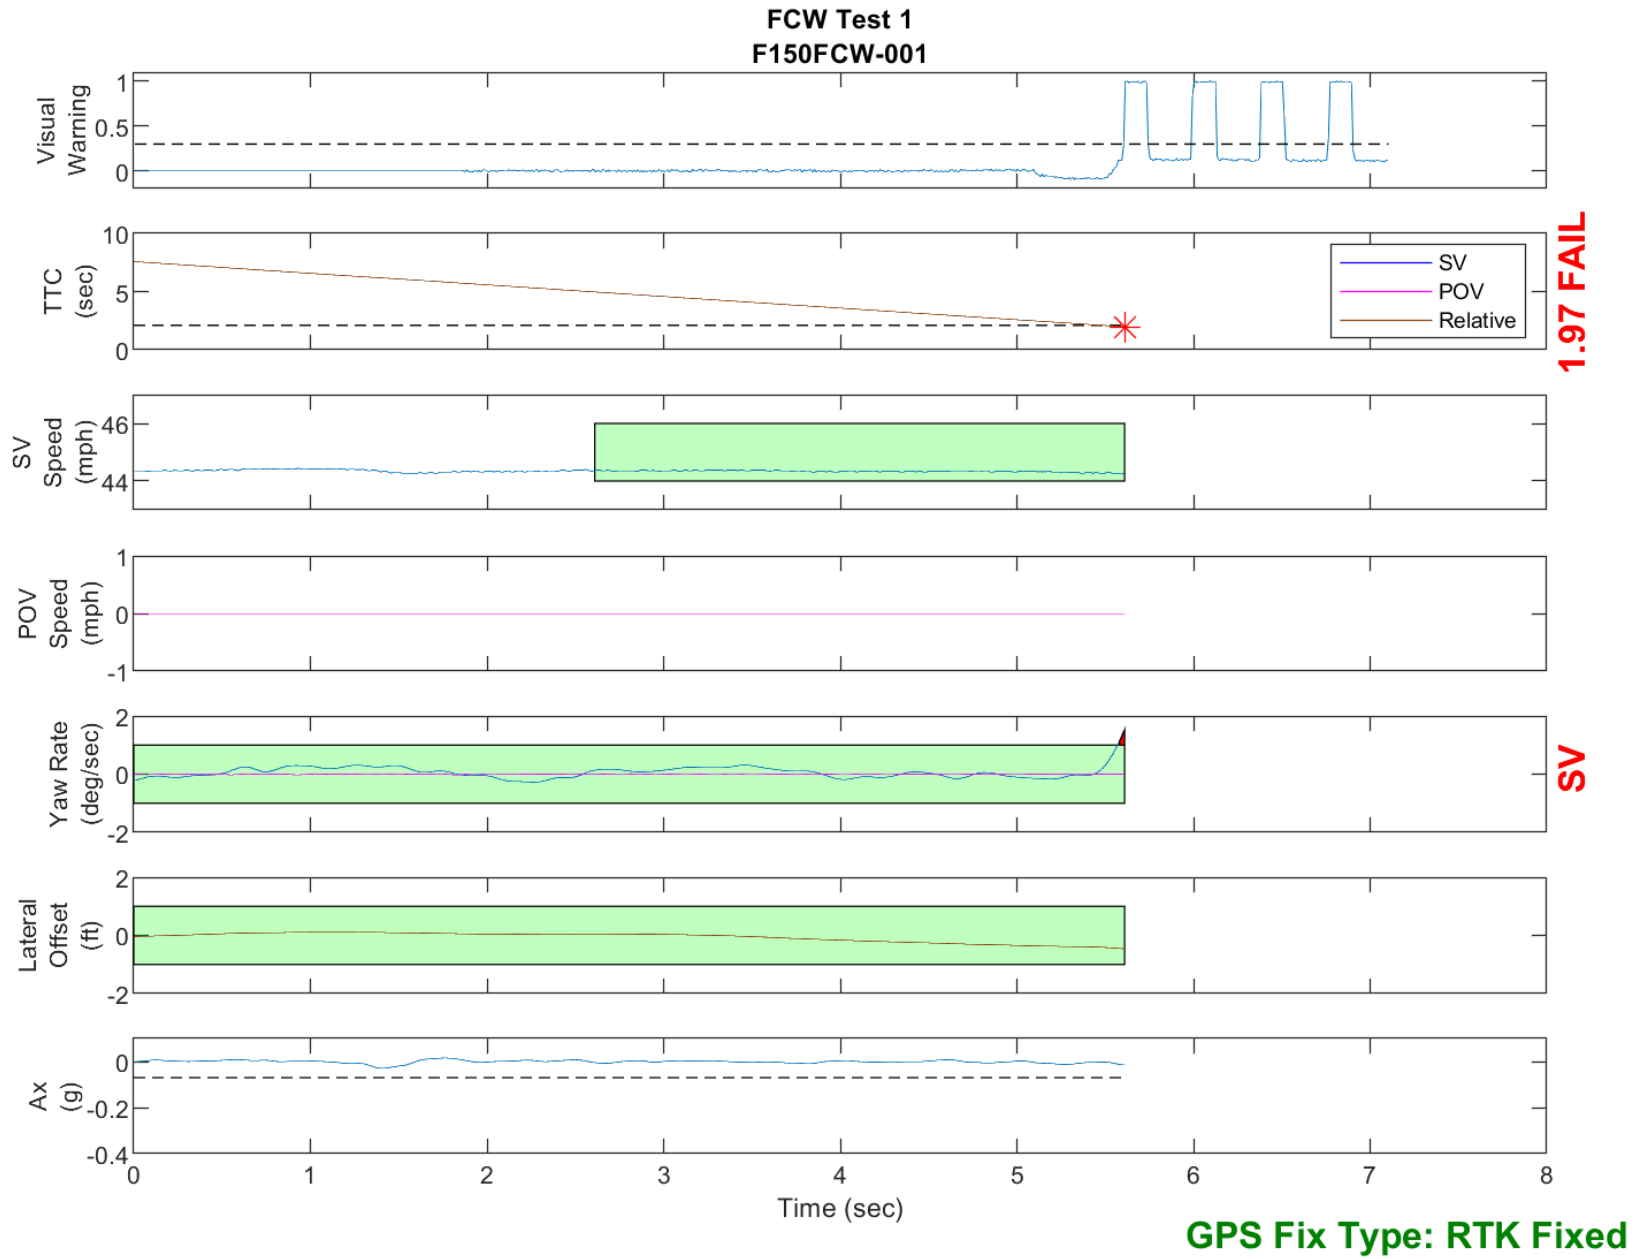


Figure D8. Time History for Run 1, FCW Test 1, Visual Warning

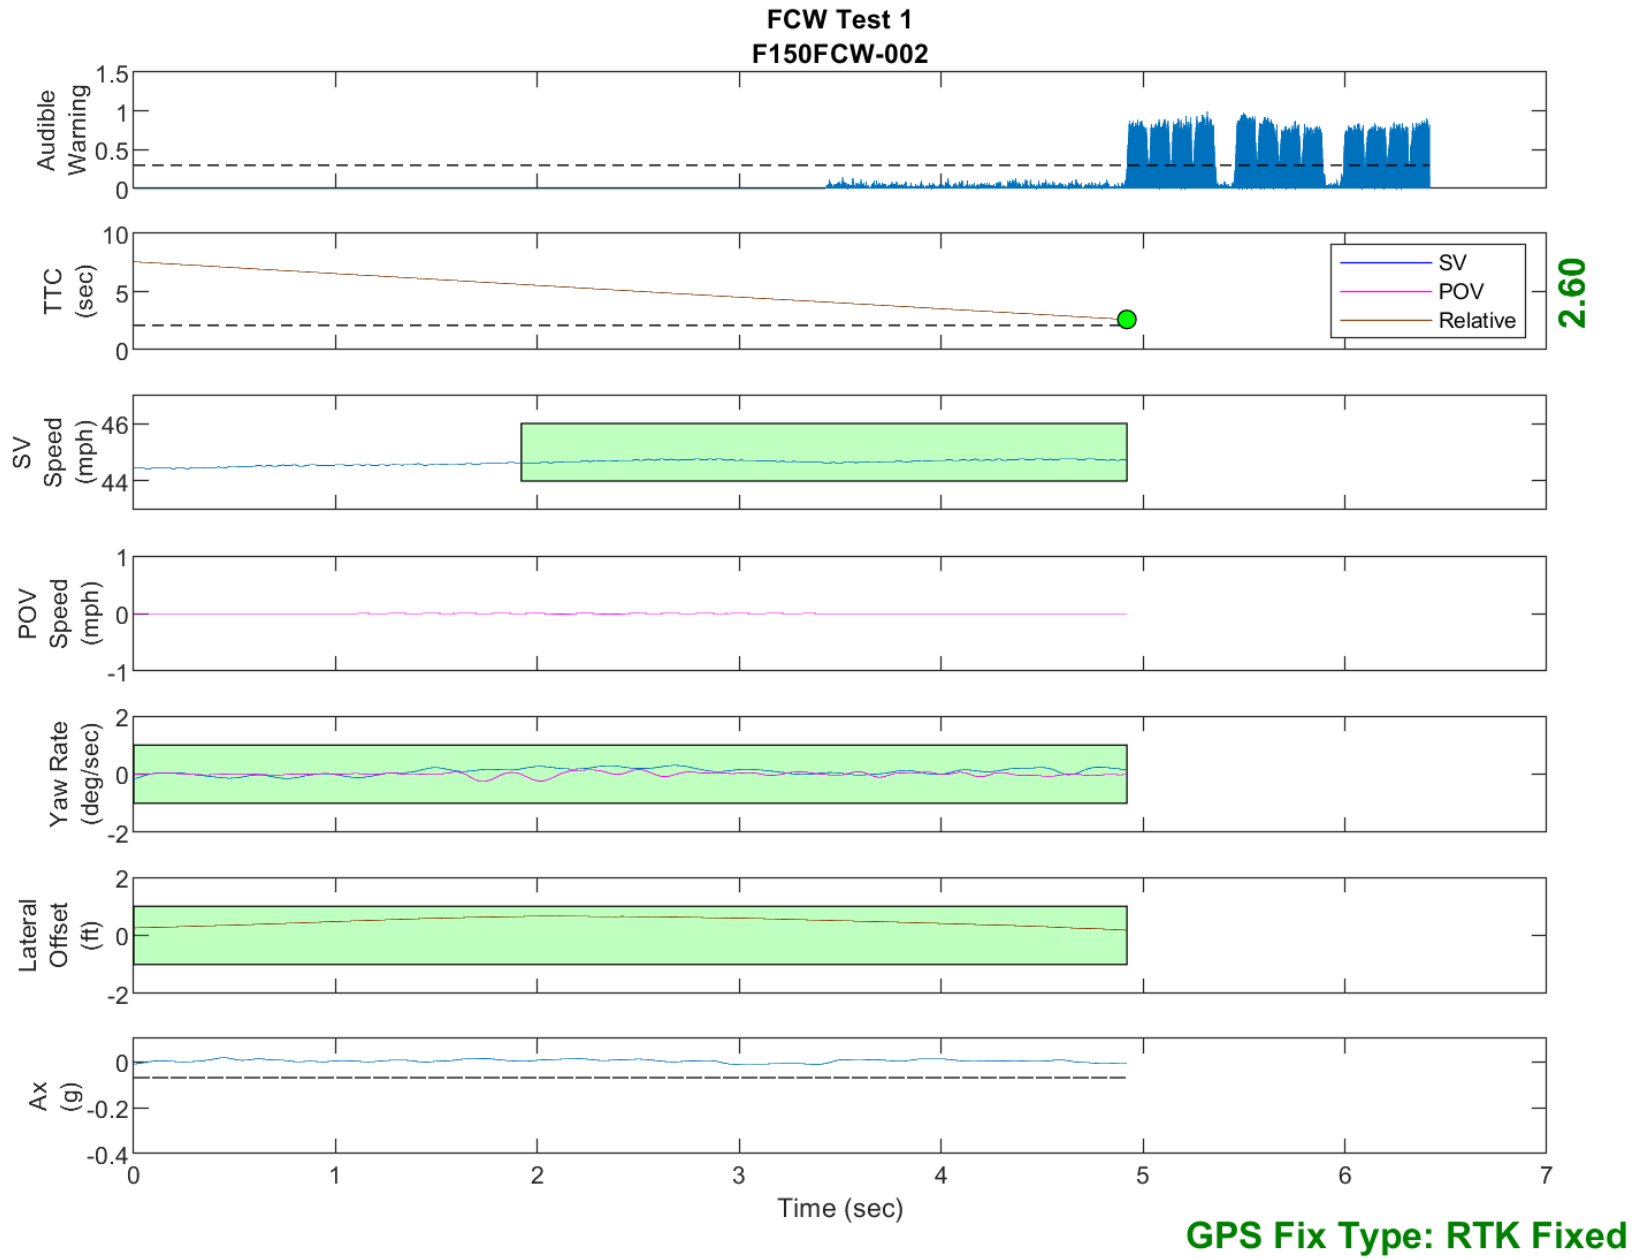


Figure D9. Time History for Run 2, FCW Test 1, Audible Warning

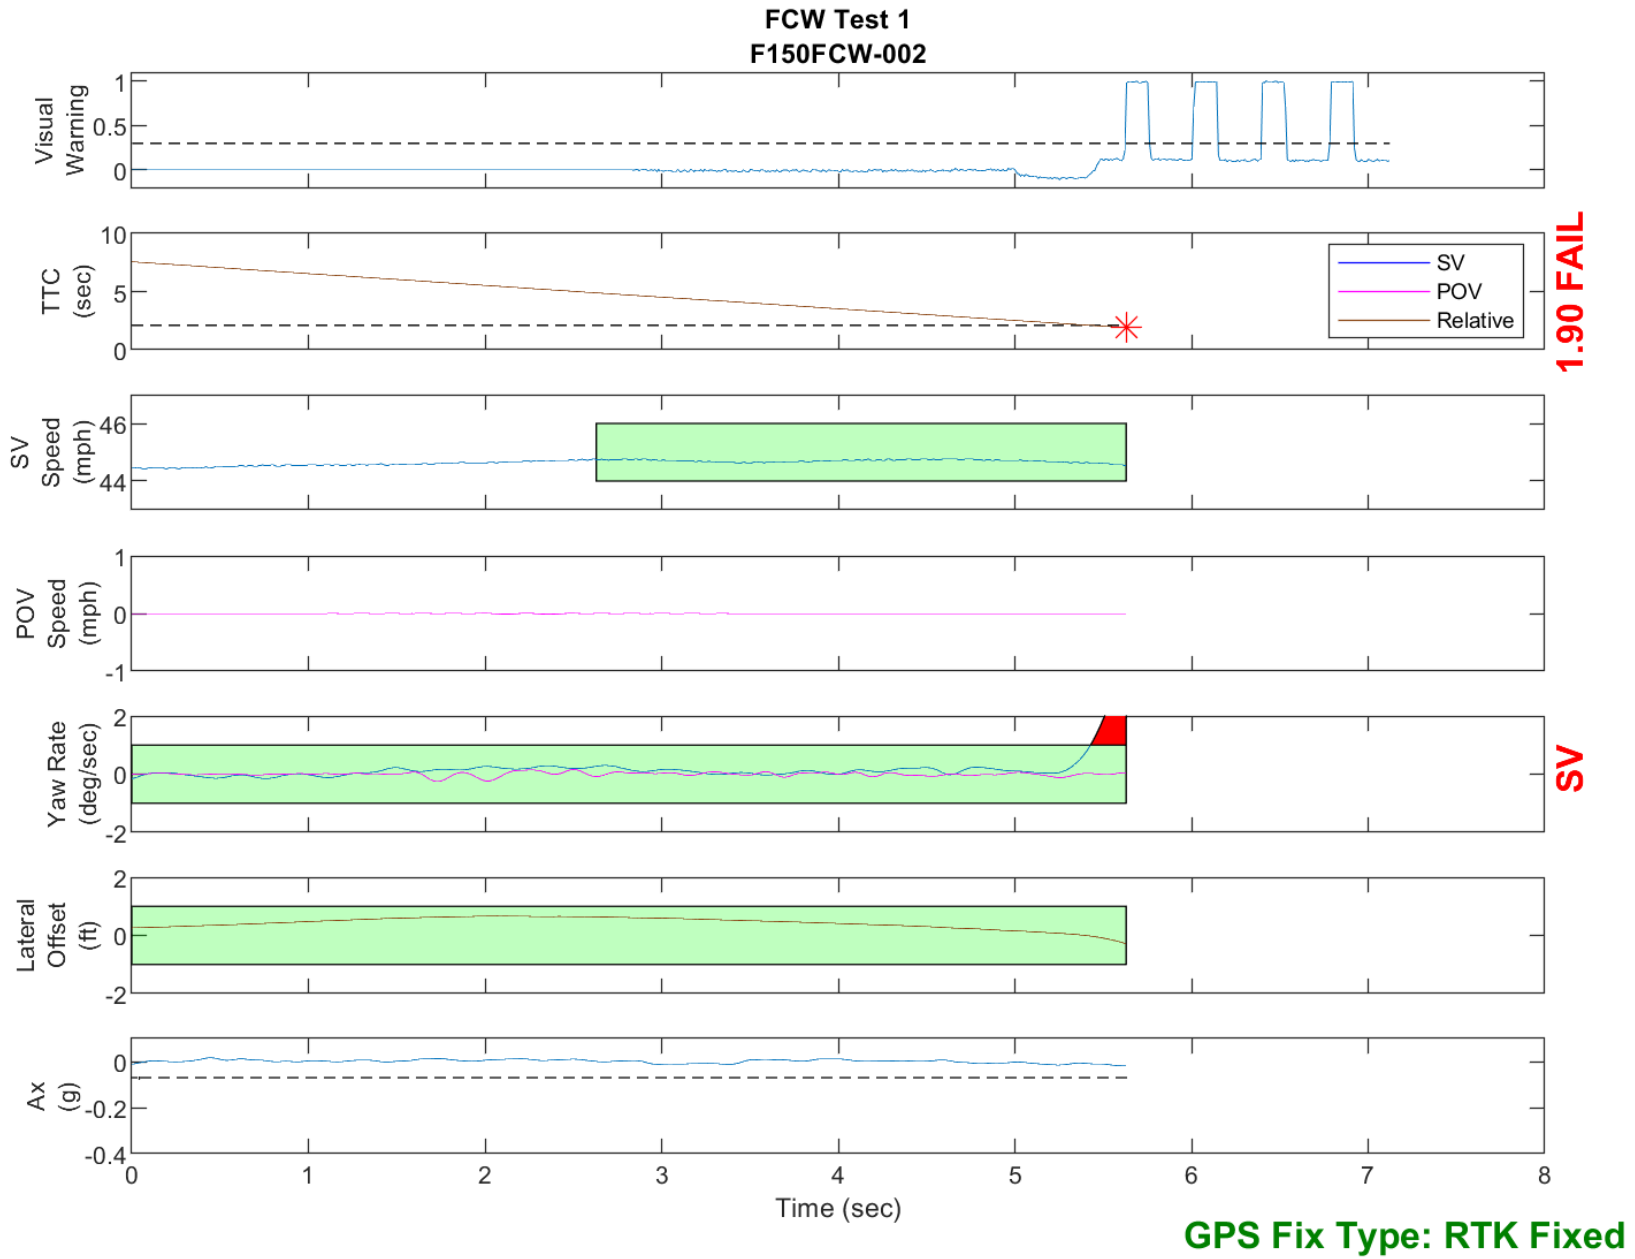


Figure D10. Time History for Run 2, FCW Test 1, Visual Warning

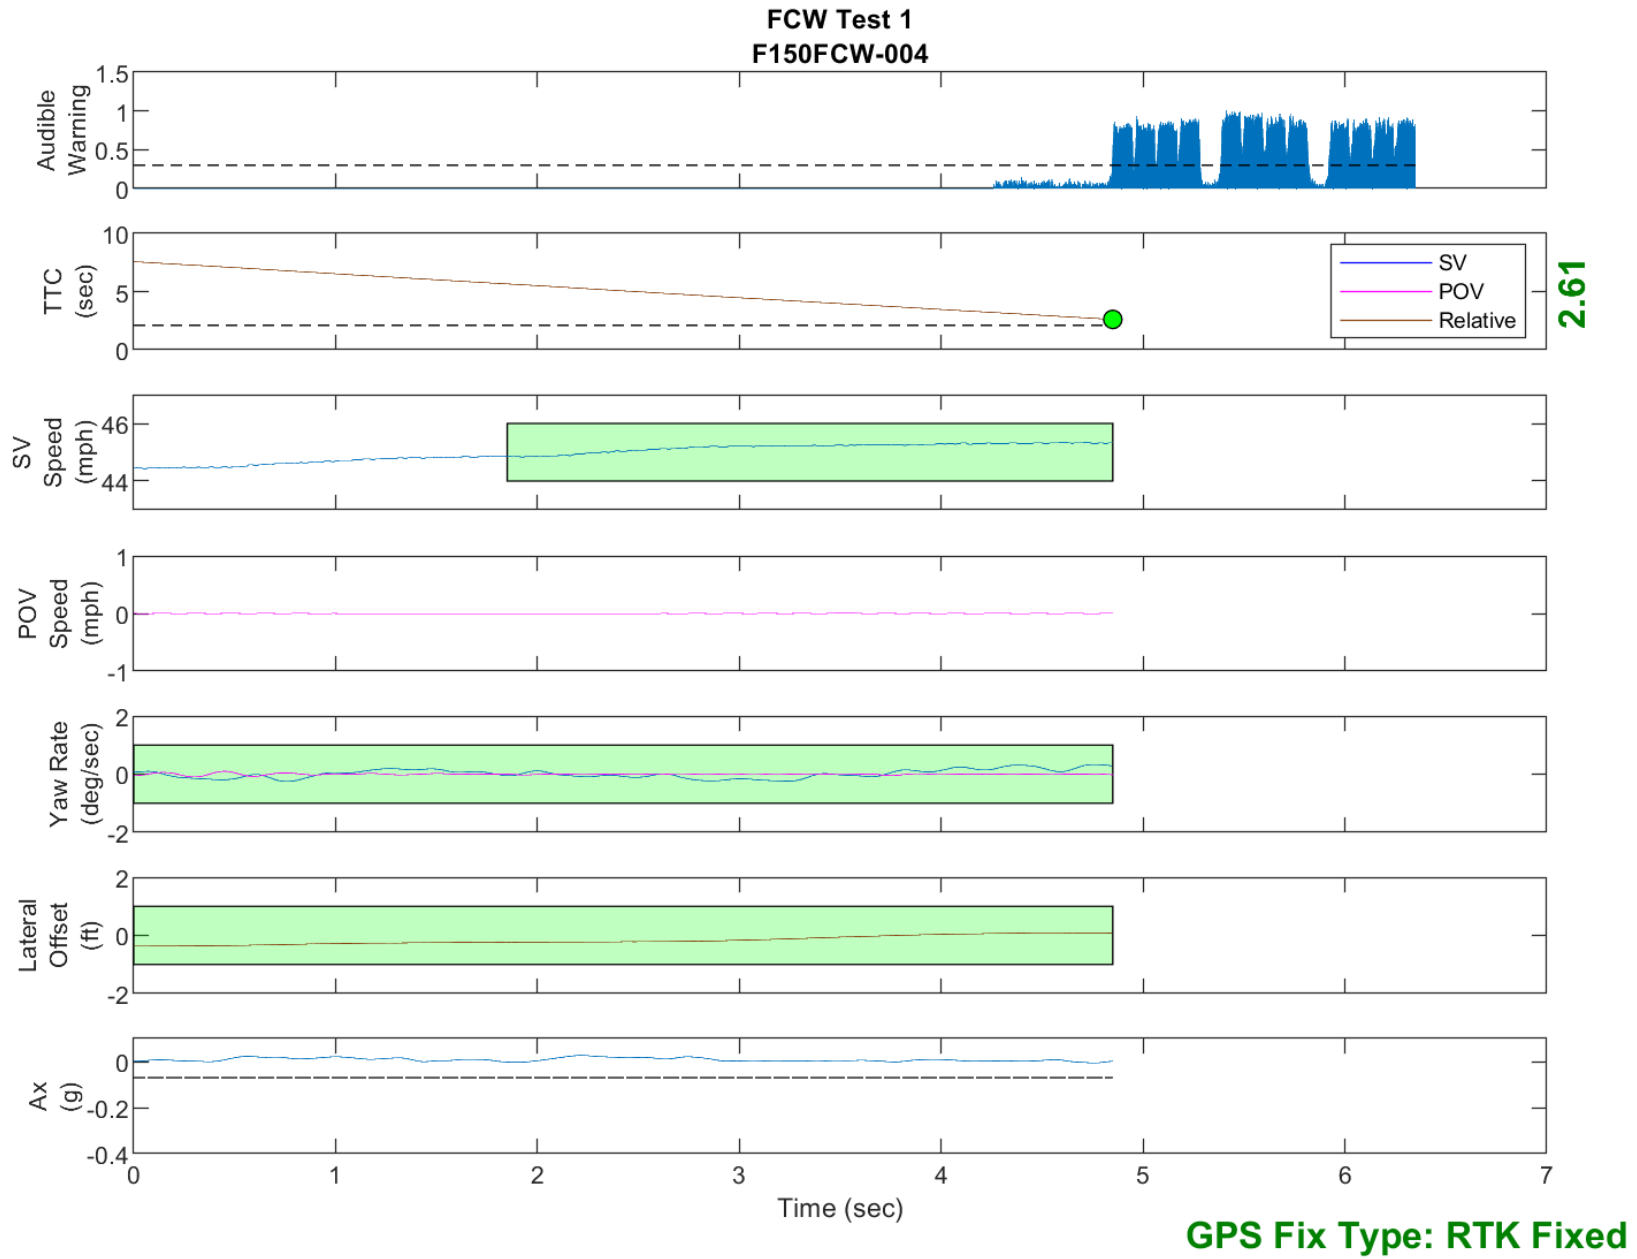


Figure D11. Time History for Run 4, FCW Test 1, Audible Warning

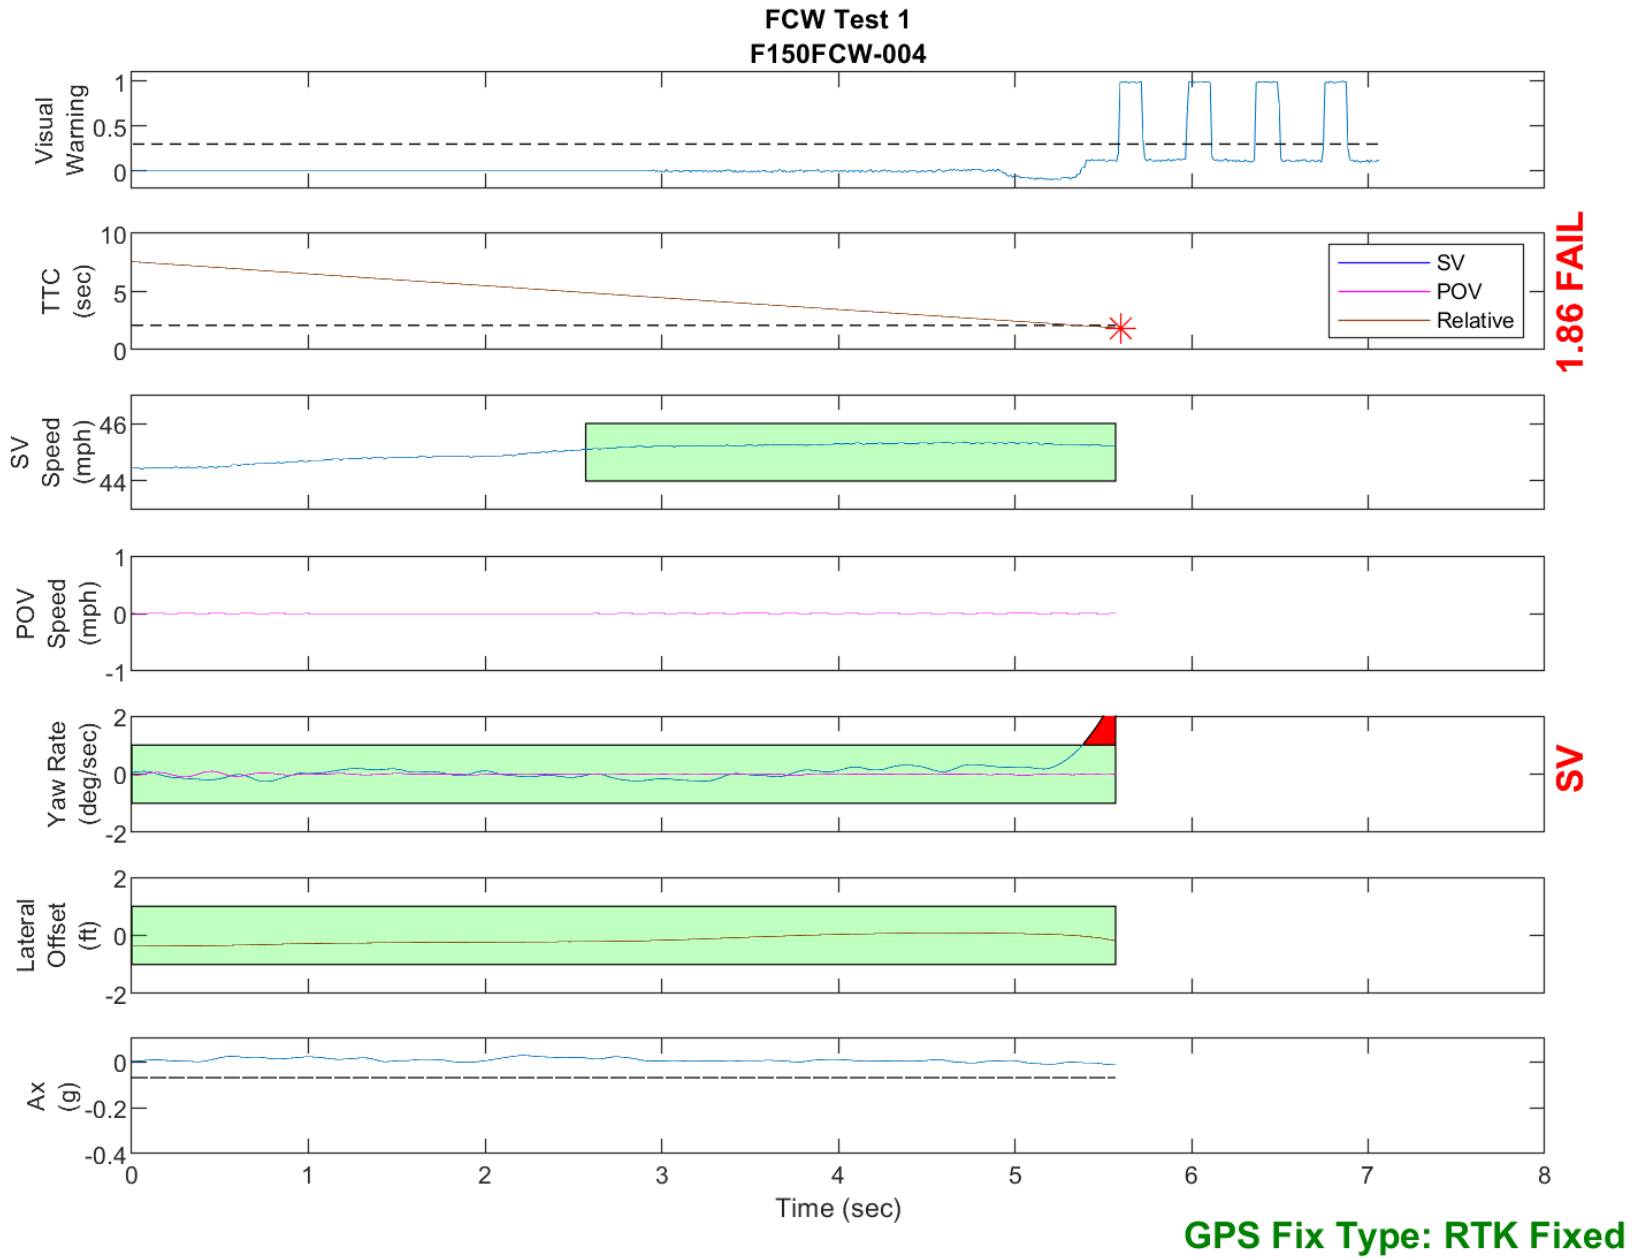


Figure D12. Time History for Run 4, FCW Test 1, Visual Warning

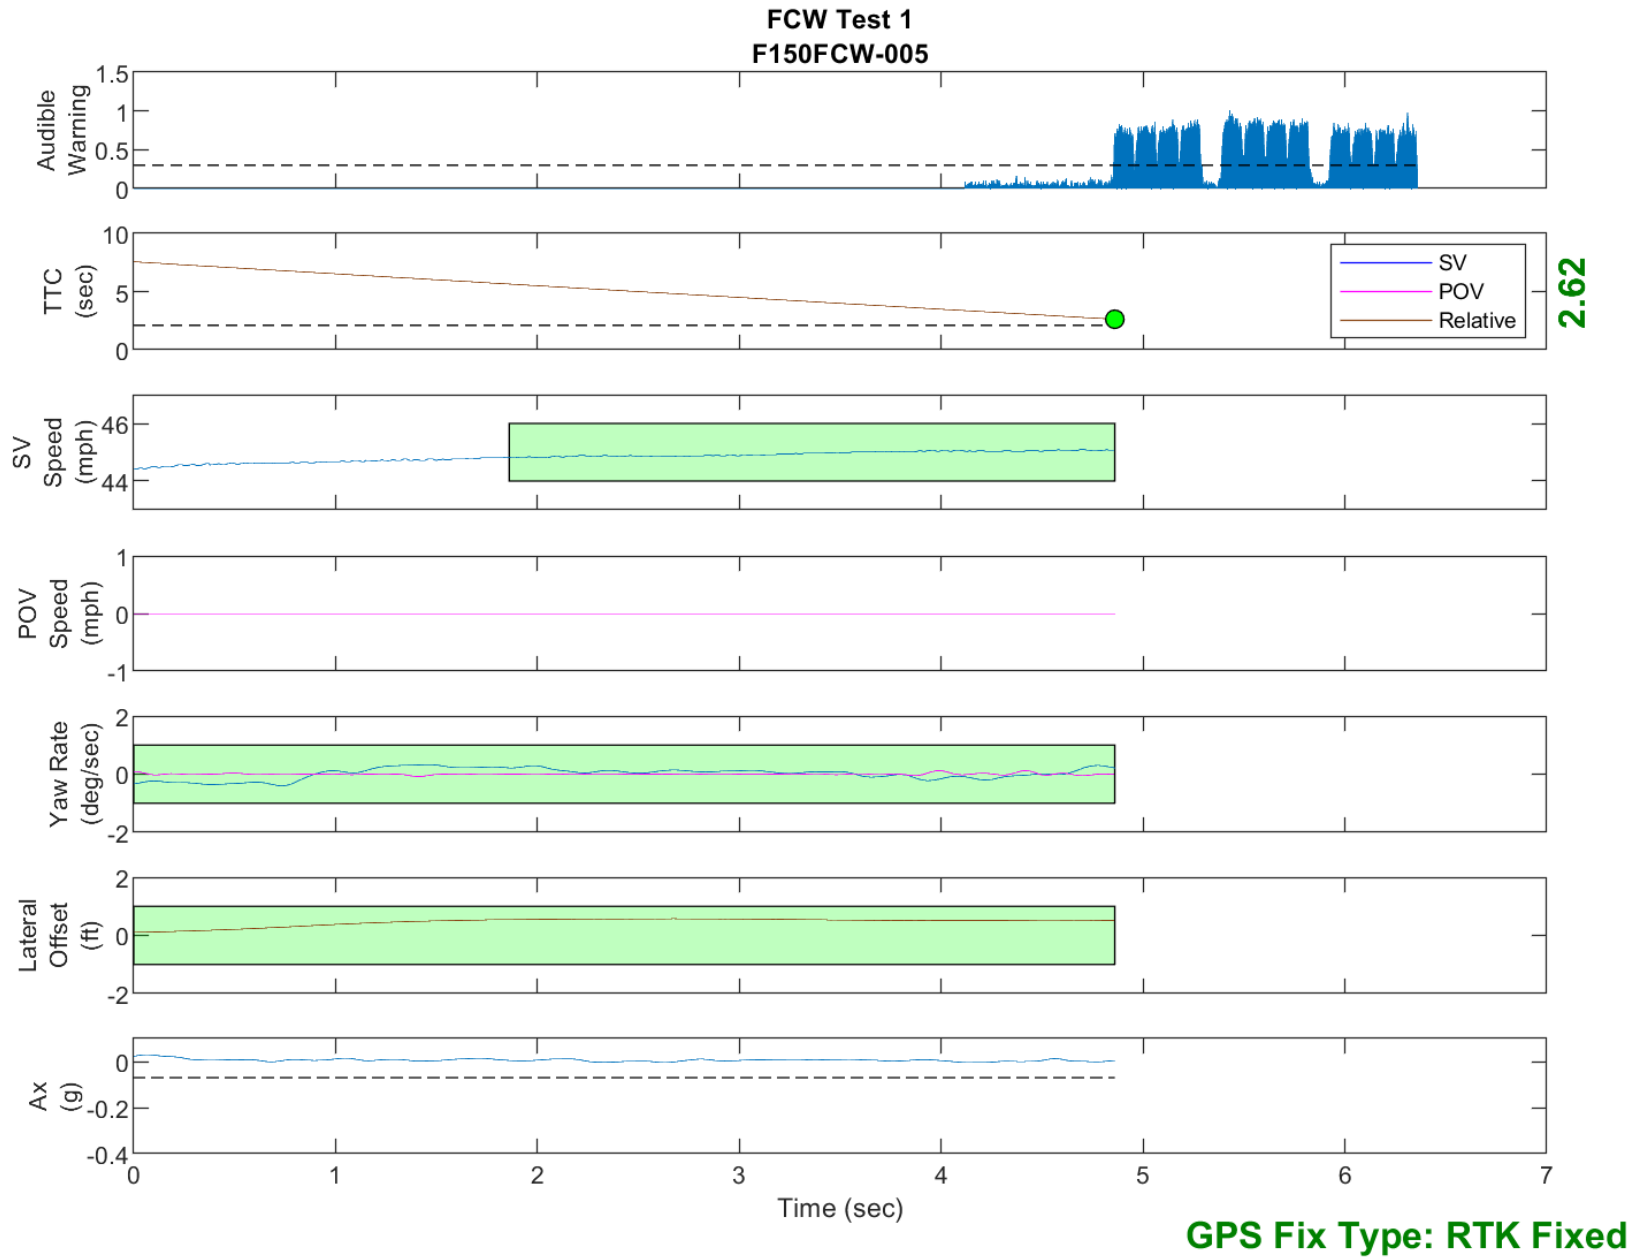


Figure D13. Time History for Run 5, FCW Test 1, Audible Warning

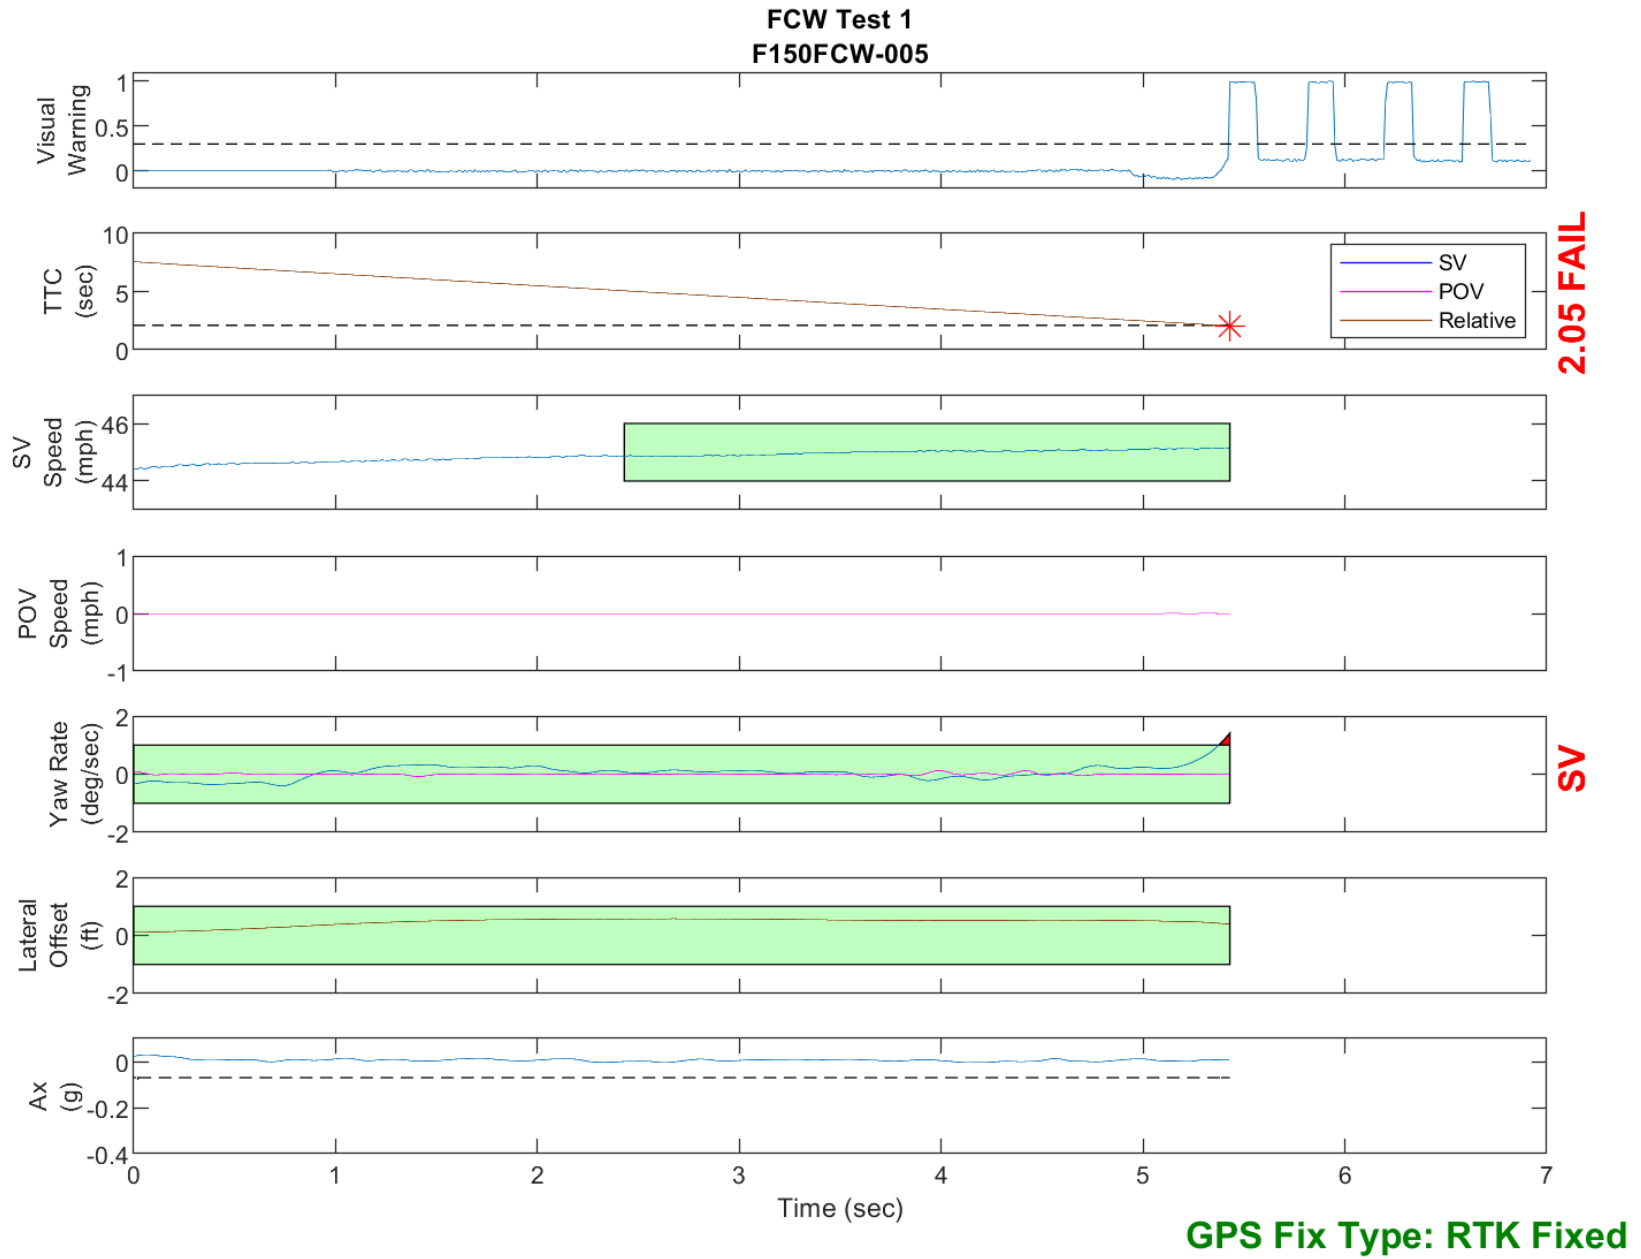


Figure D14. Time History for Run 5, FCW Test 1, Visual Warning

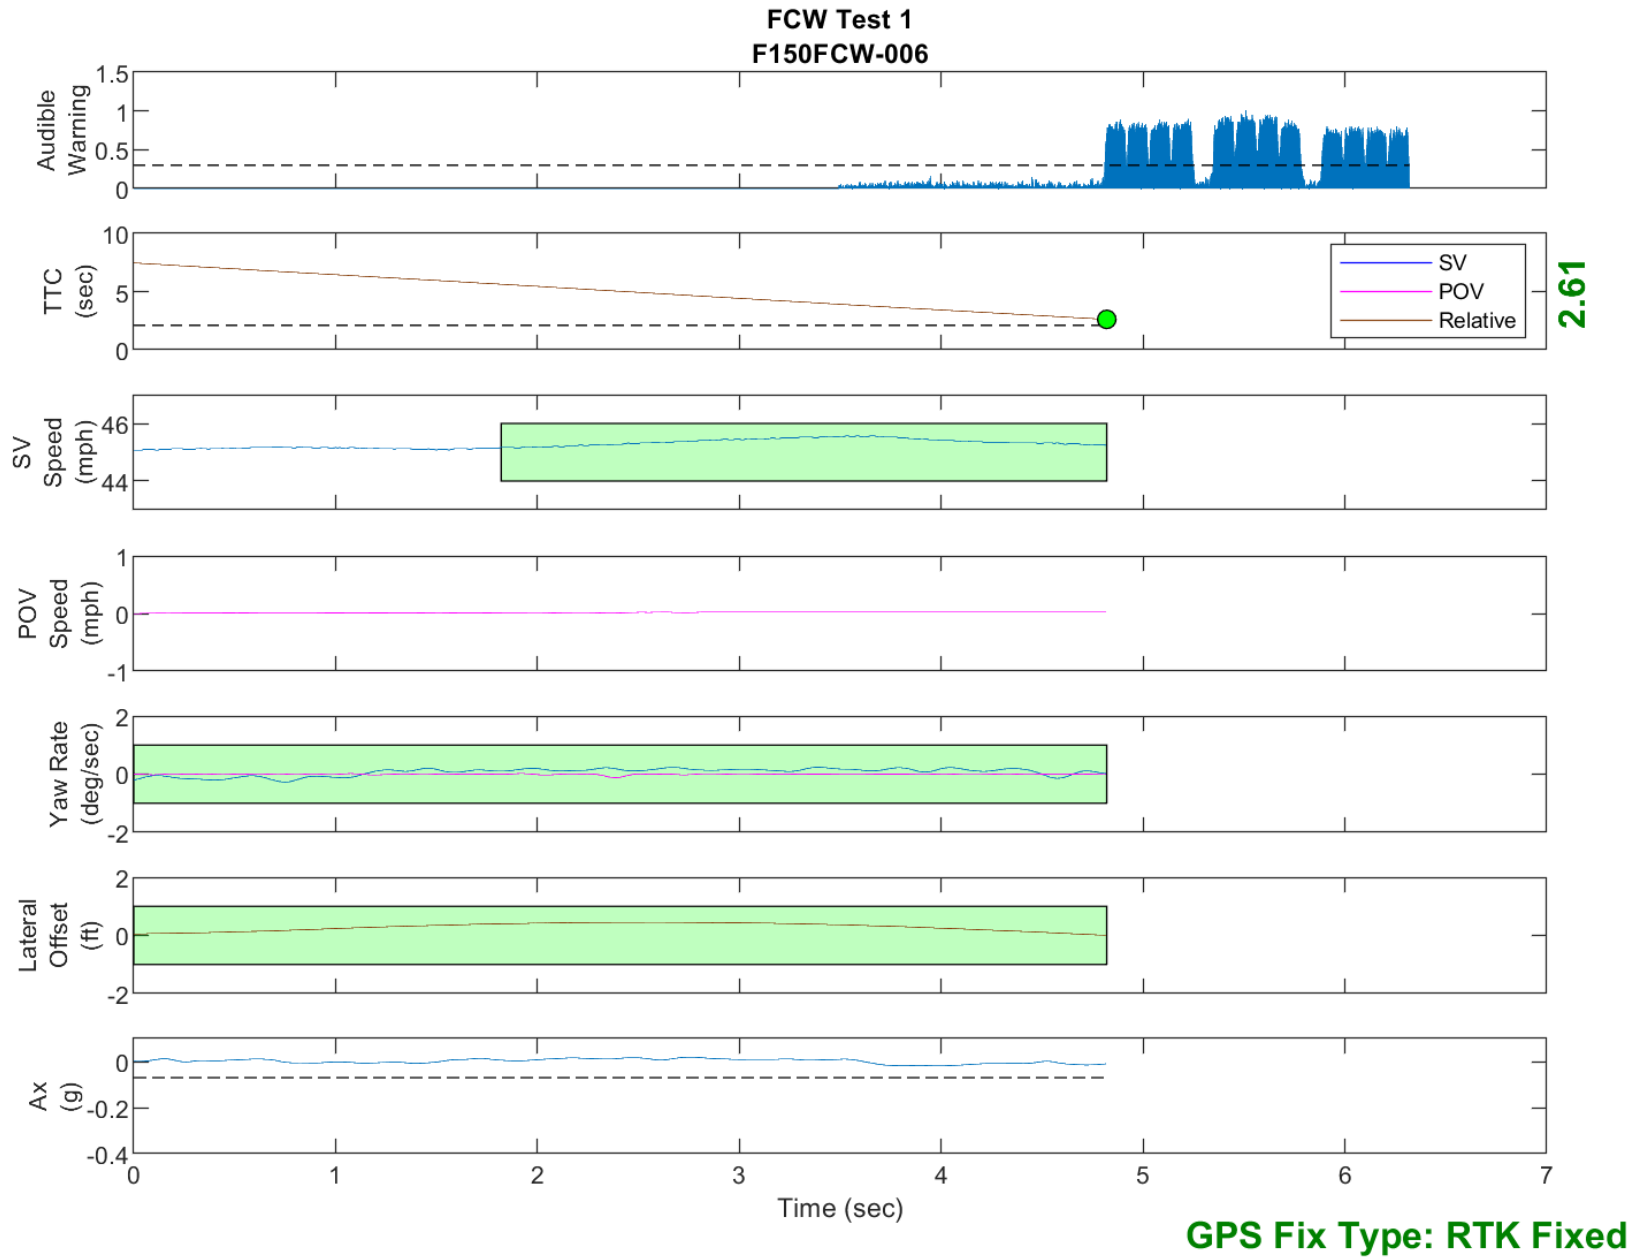


Figure D15. Time History for Run 6, FCW Test 1, Audible Warning

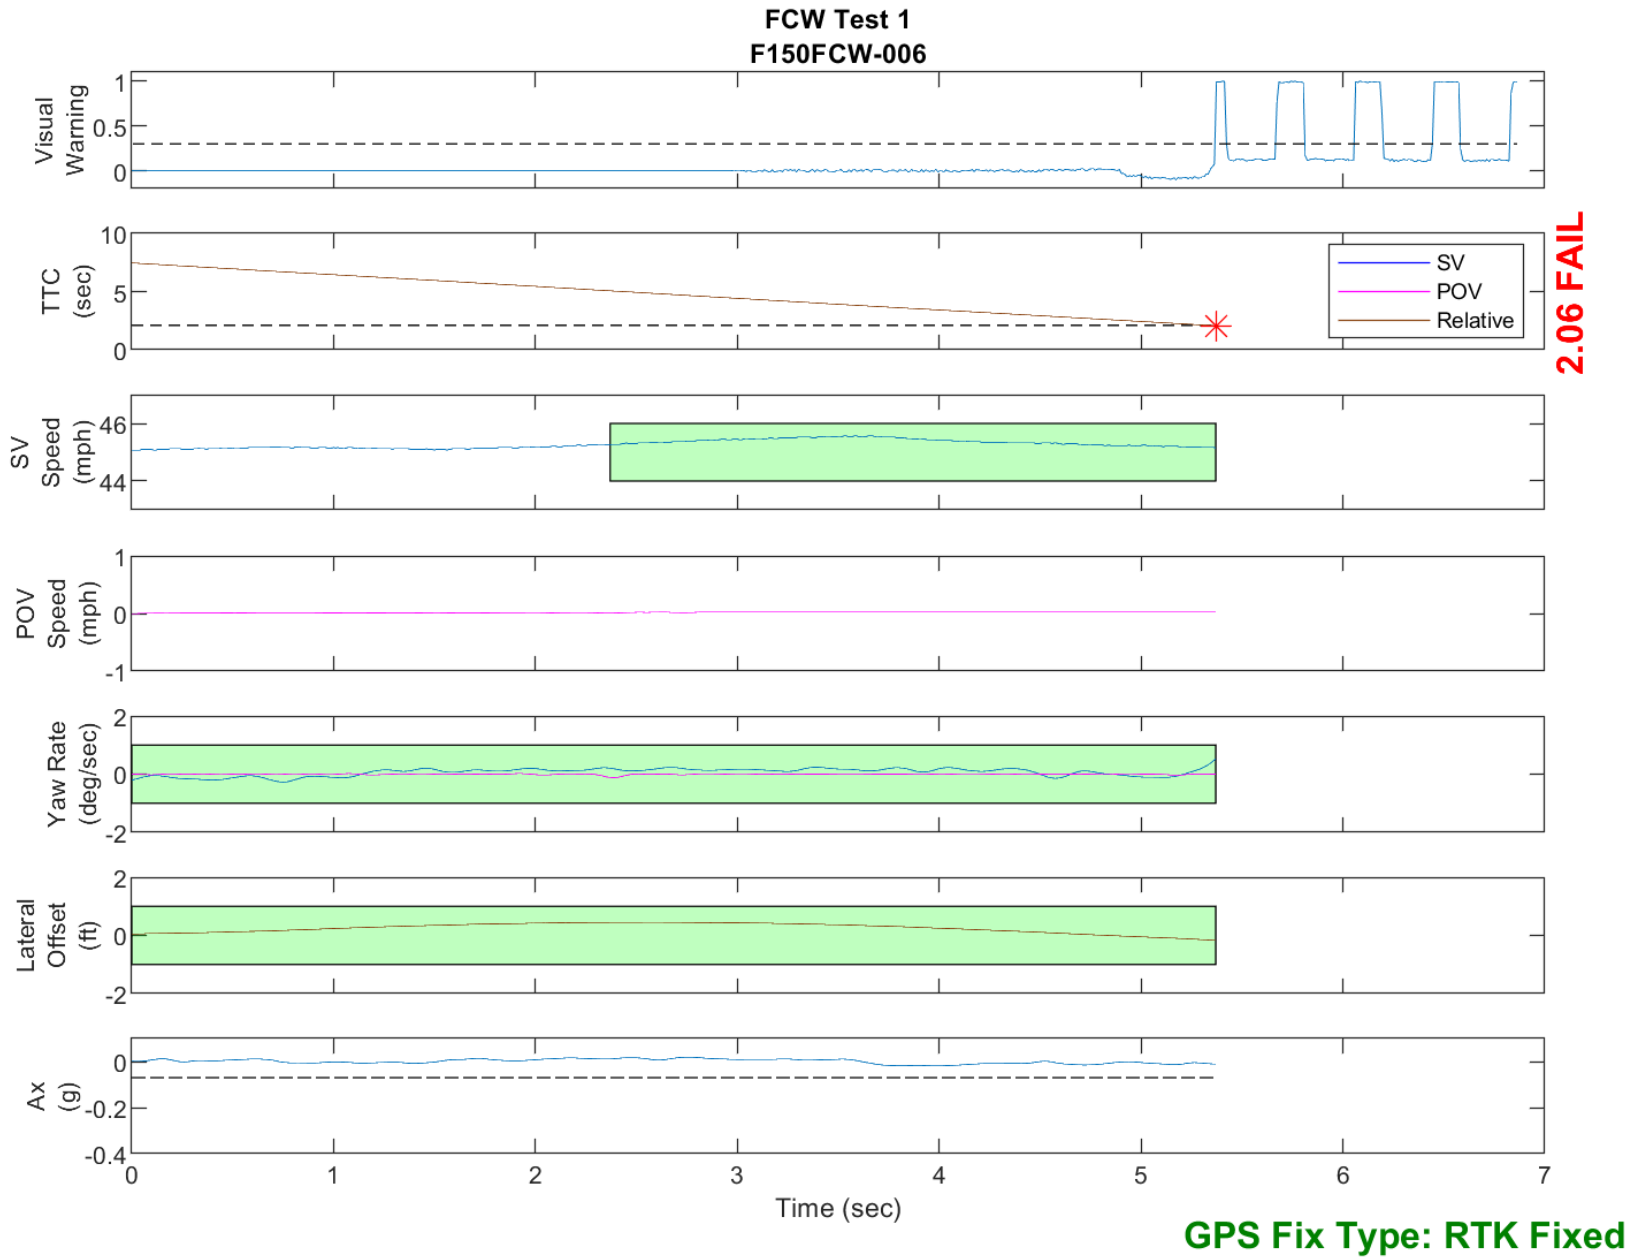


Figure D16. Time History for Run 6, FCW Test 1, Visual Warning

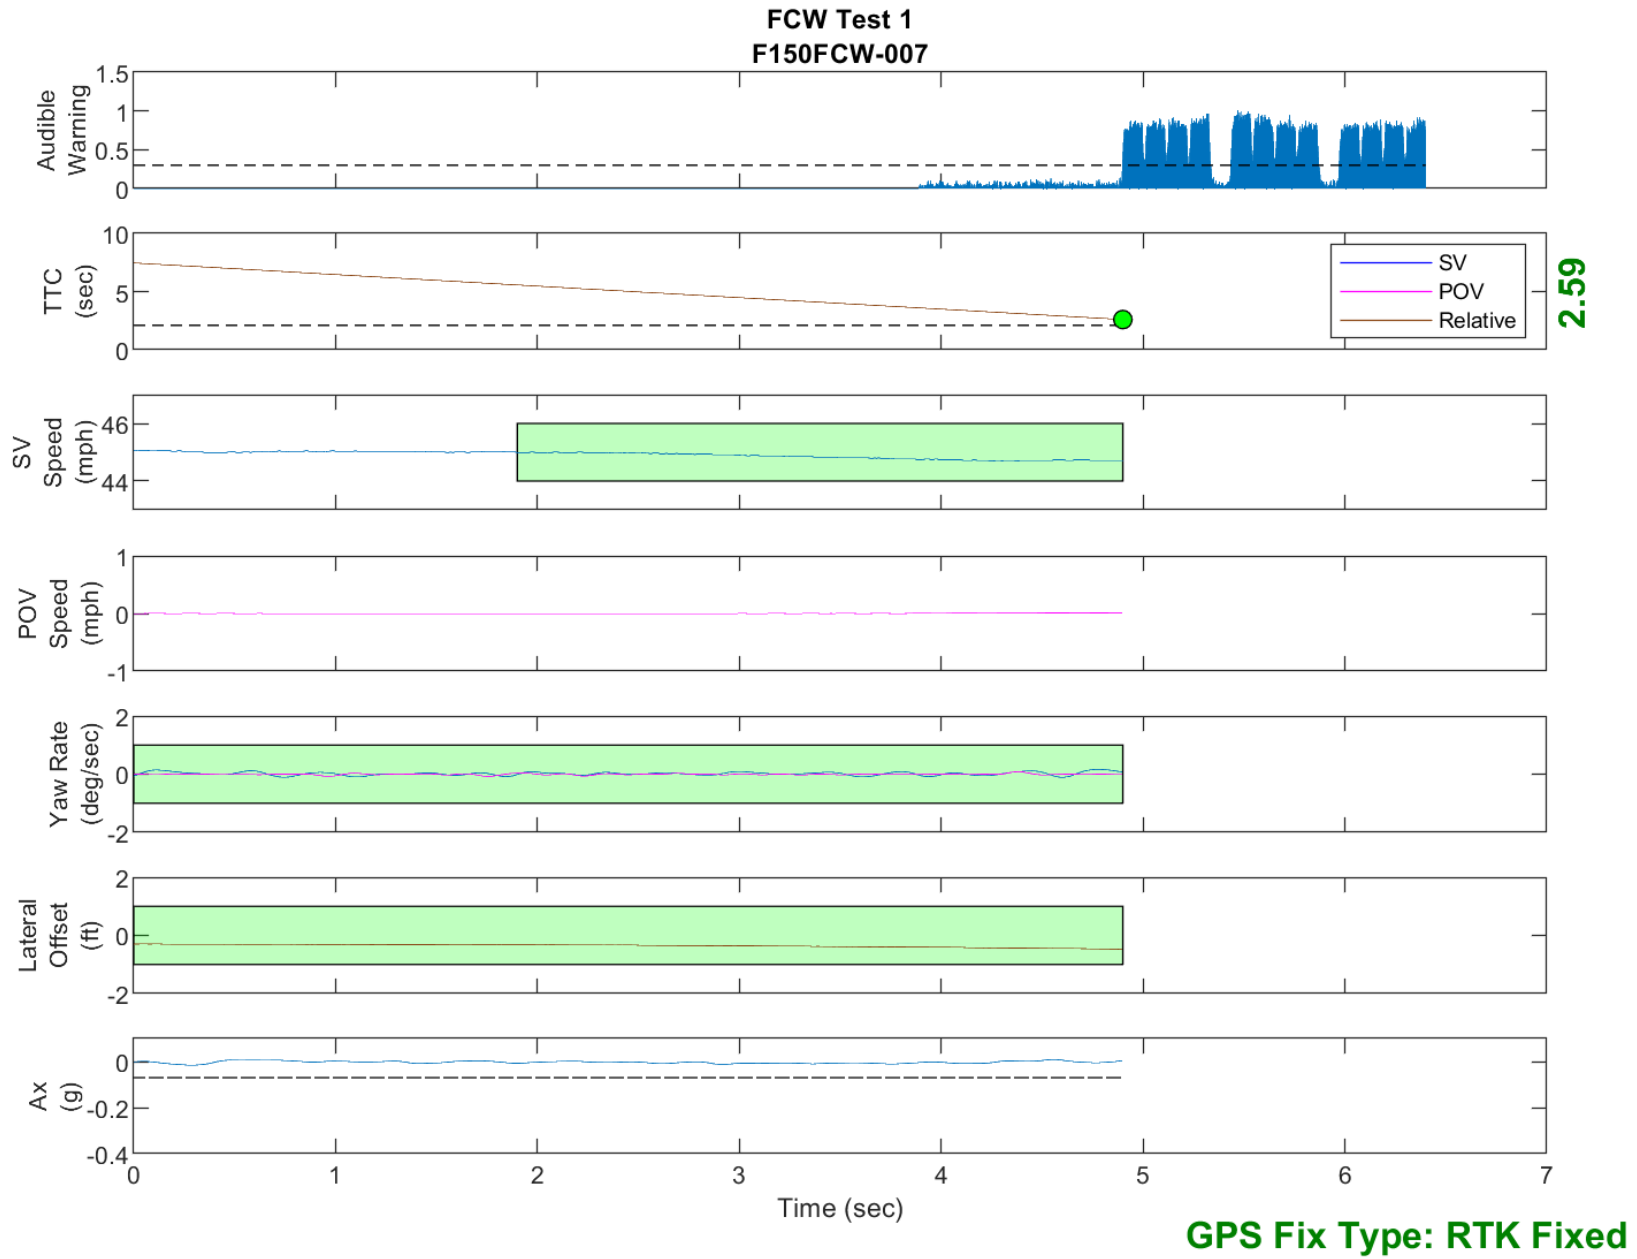


Figure D17. Time History for Run 7, FCW Test 1, Audible Warning

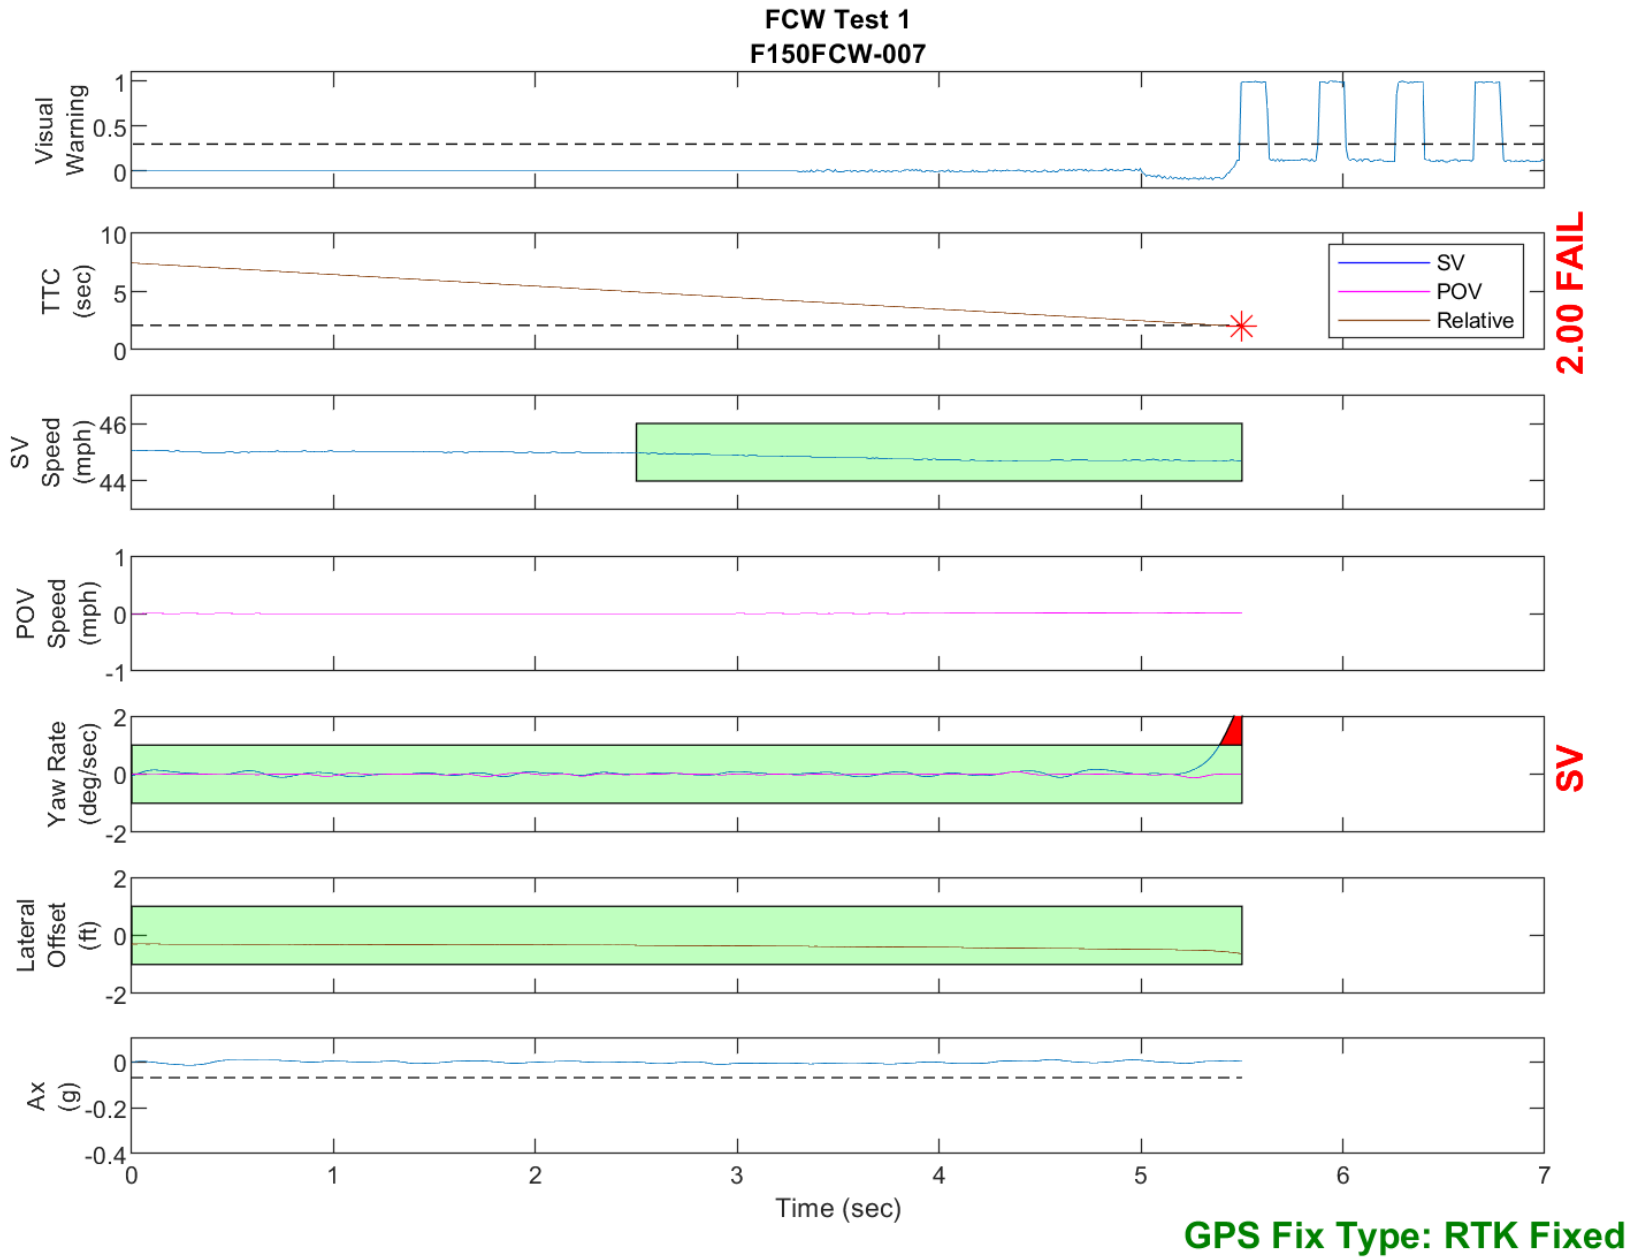


Figure D18. Time History for Run 7, FCW Test 1, Visual Warning

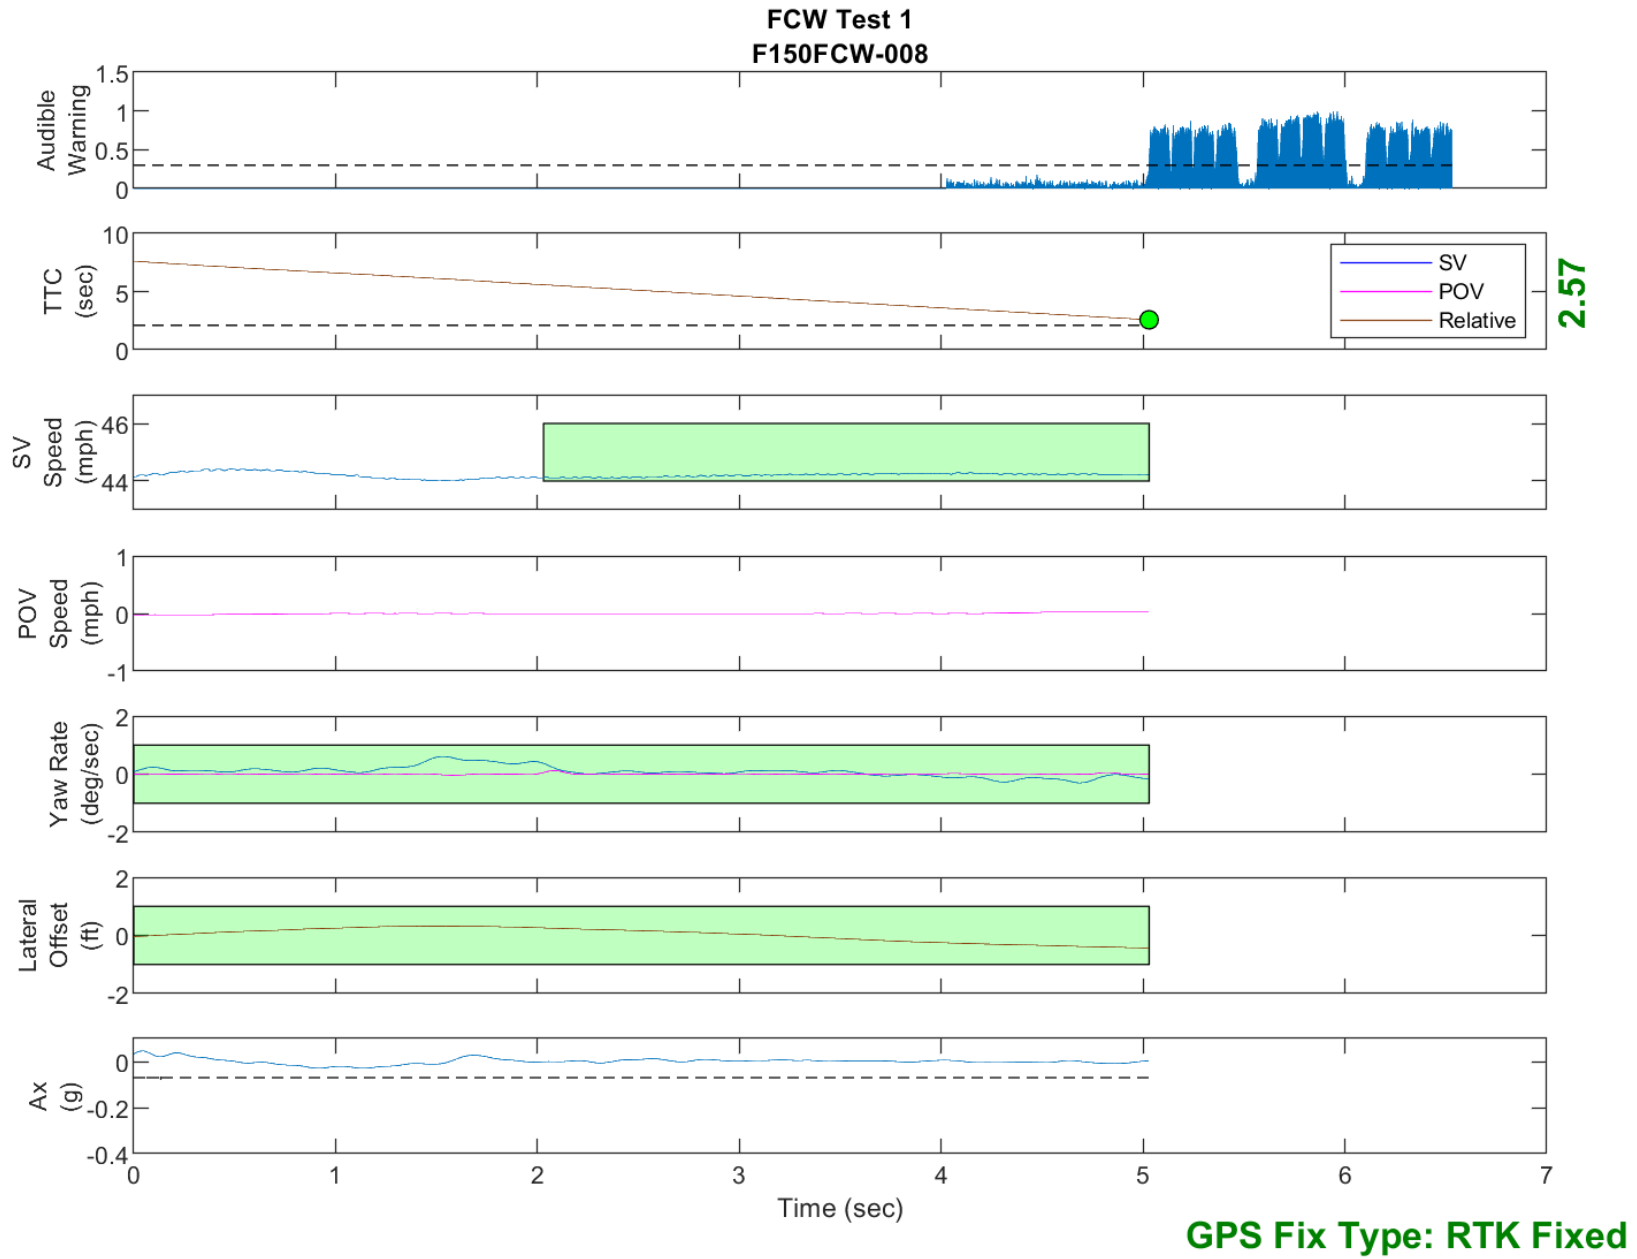


Figure D19. Time History for Run 8, FCW Test 1, Audible Warning

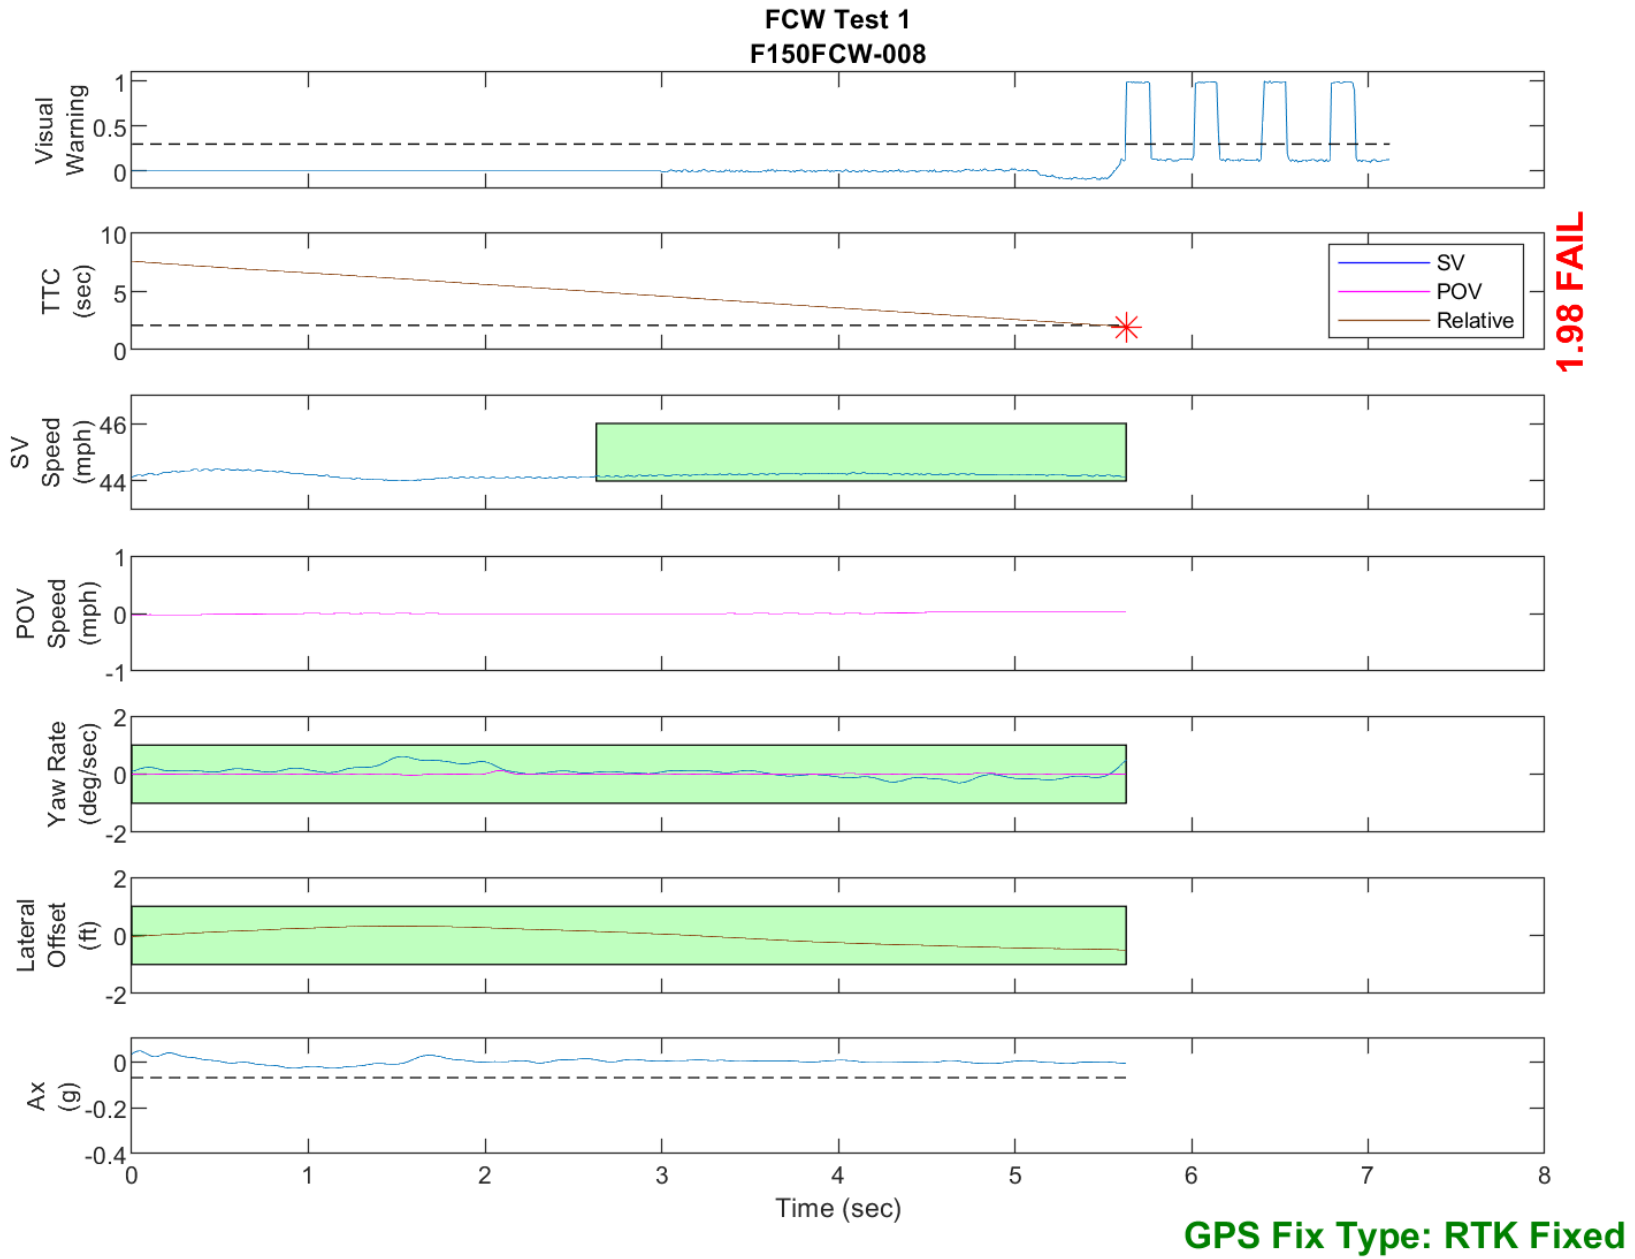


Figure D20. Time History for Run 8, FCW Test 1, Visual Warning

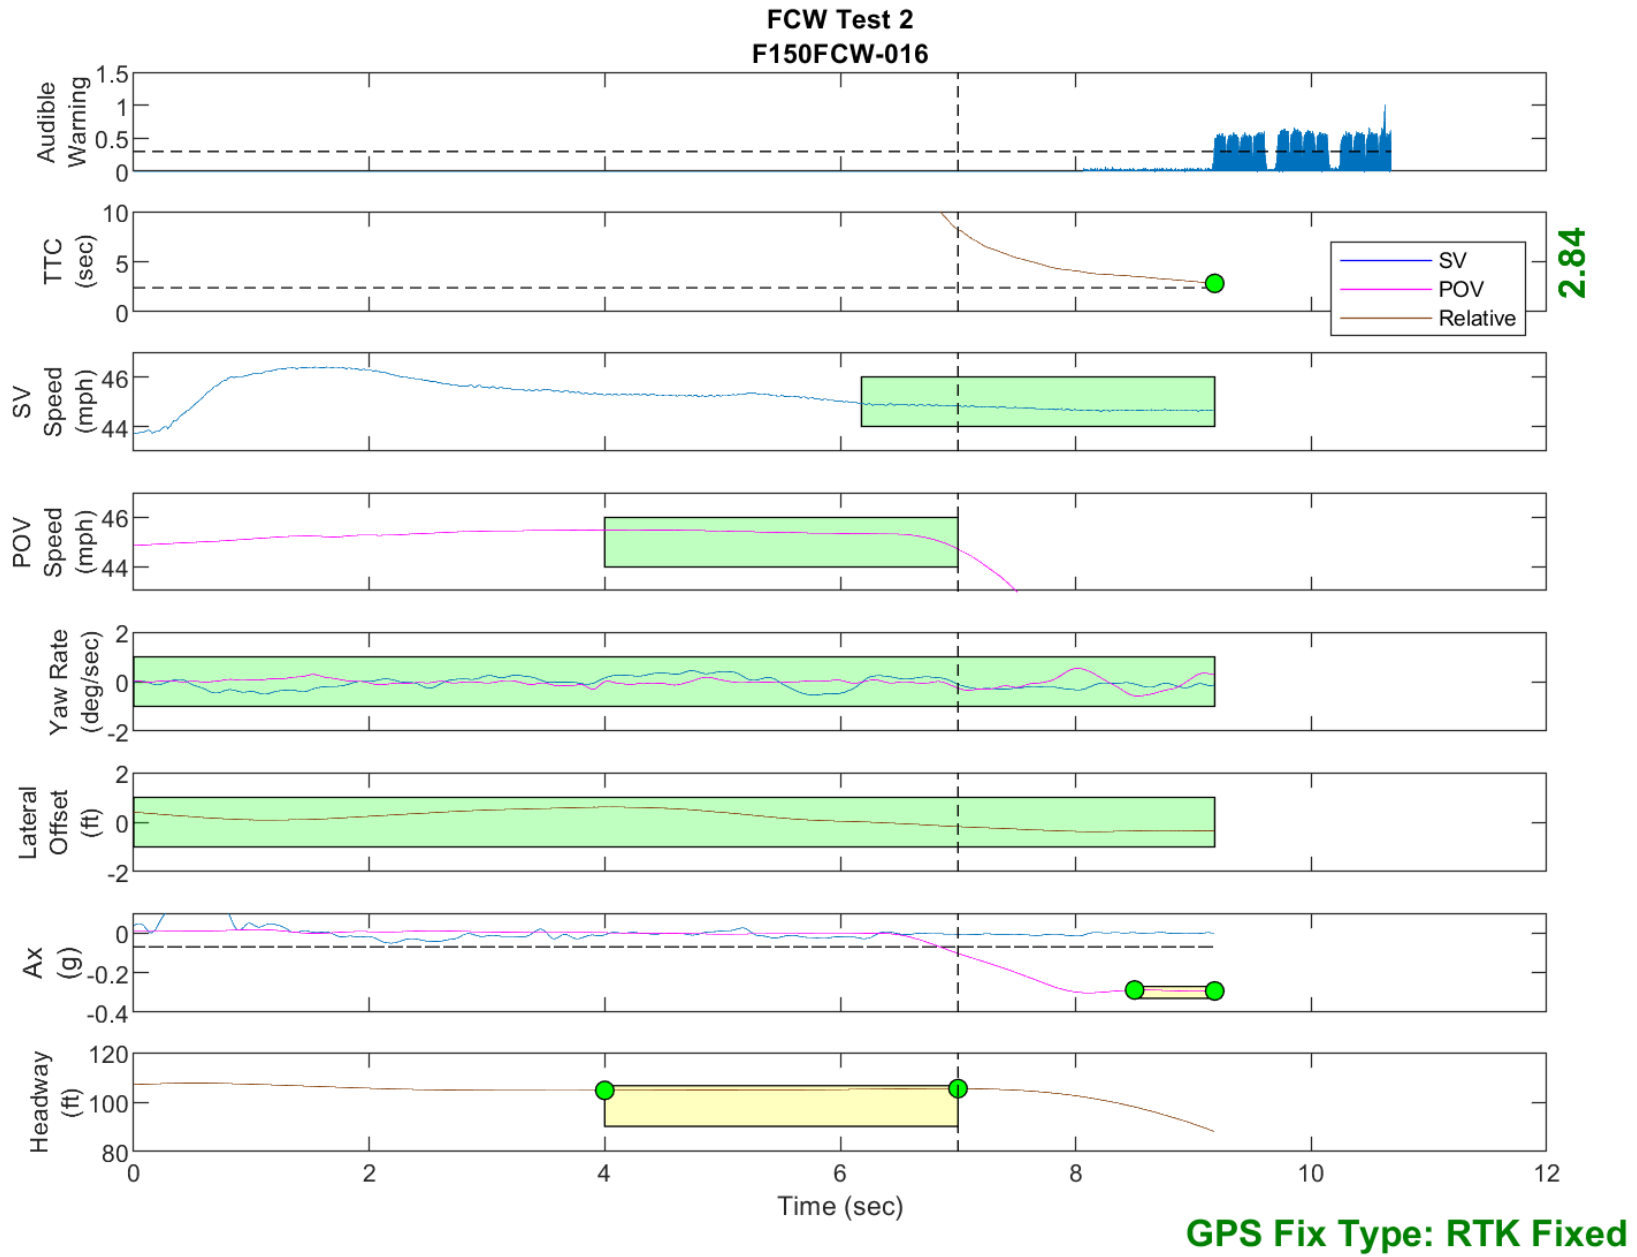


Figure D21. Time History for Run 16, FCW Test 2, Audible Warning

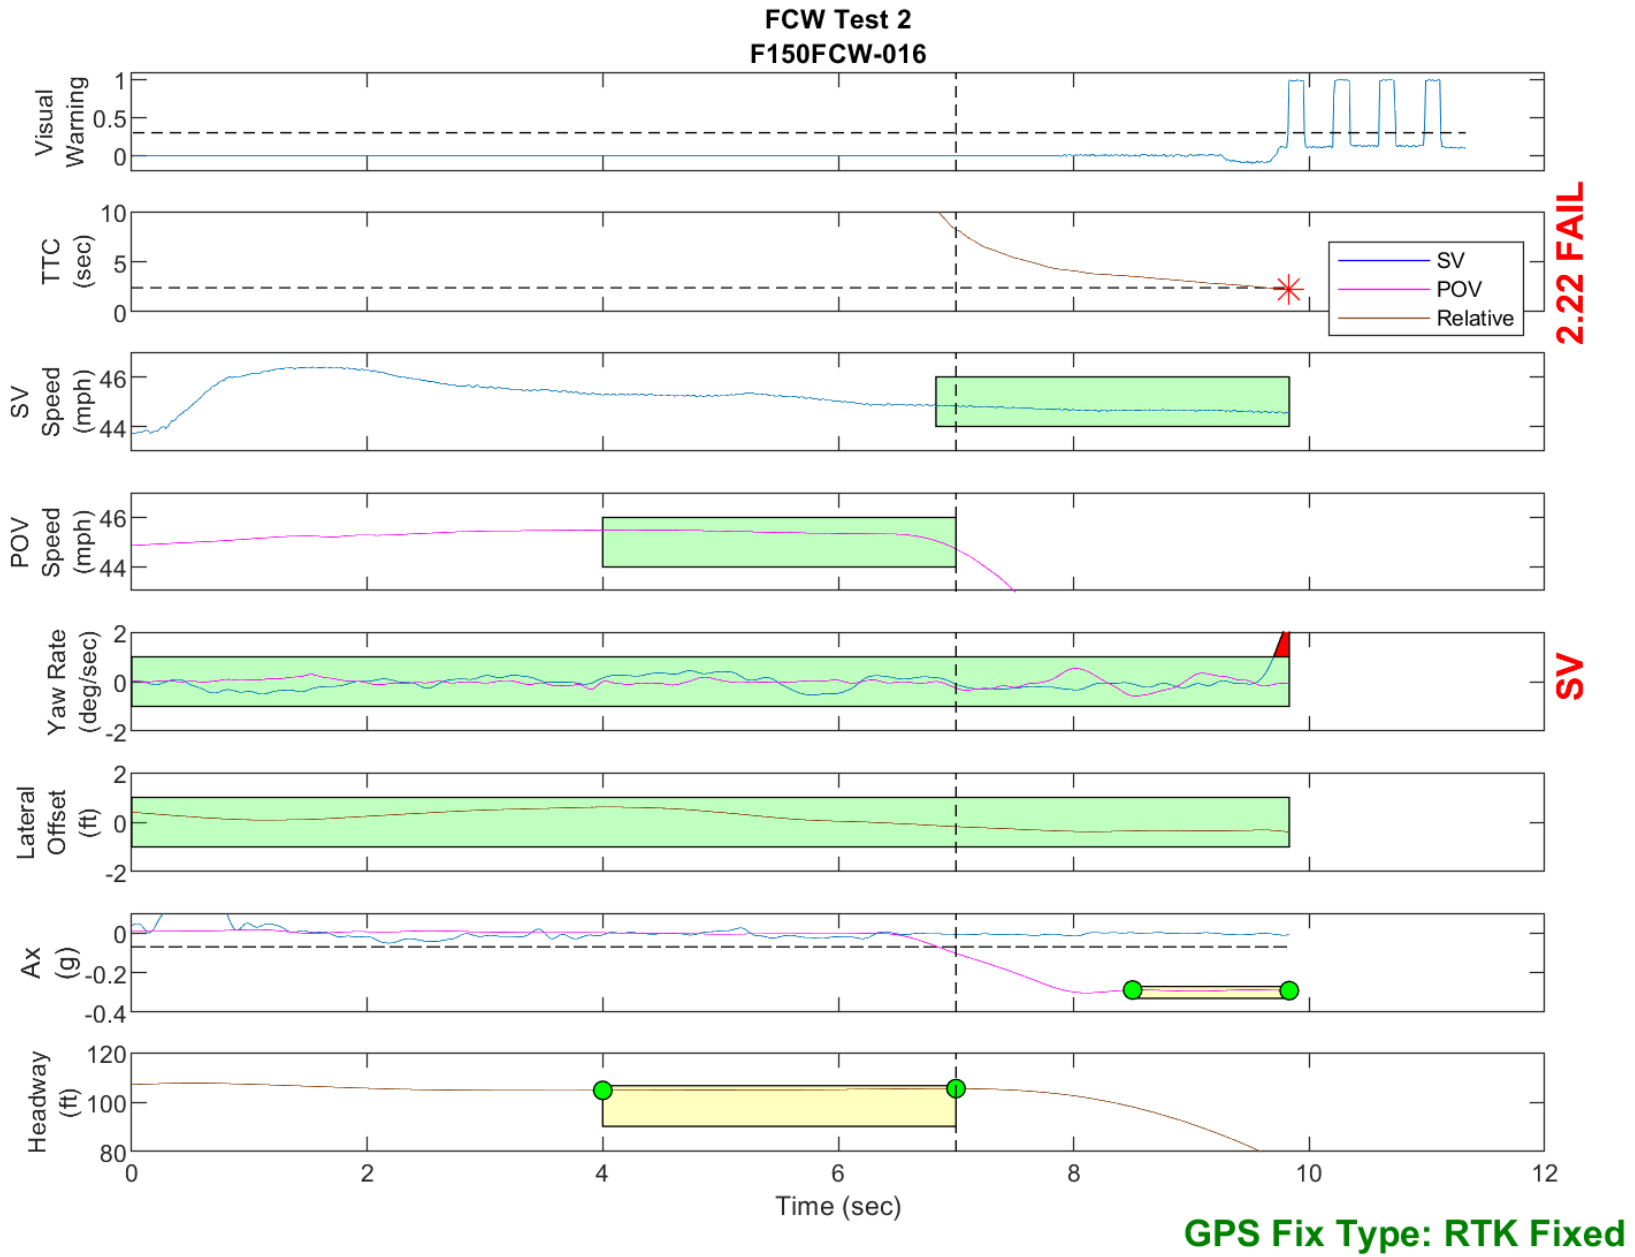


Figure D22. Time History for Run 16, FCW Test 2, Visual Warning

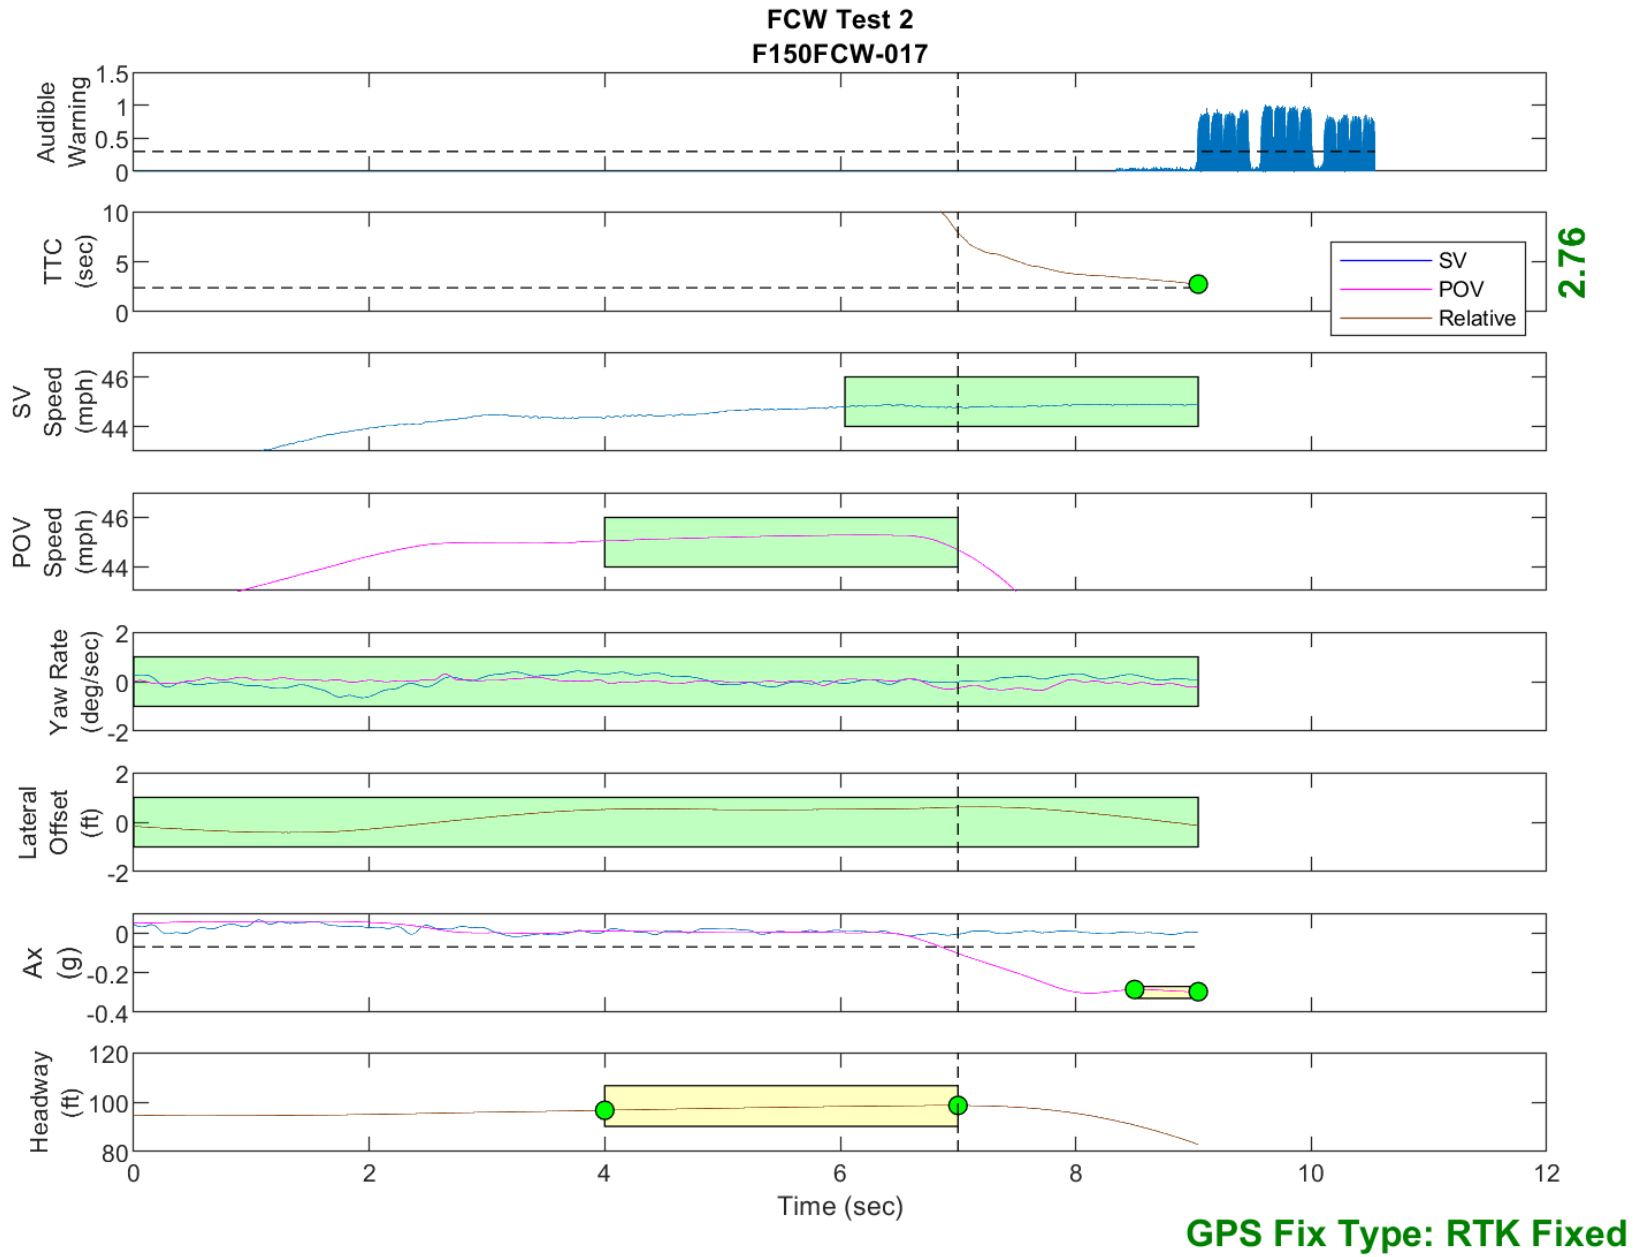


Figure D23. Time History for Run 17, FCW Test 2, Audible Warning

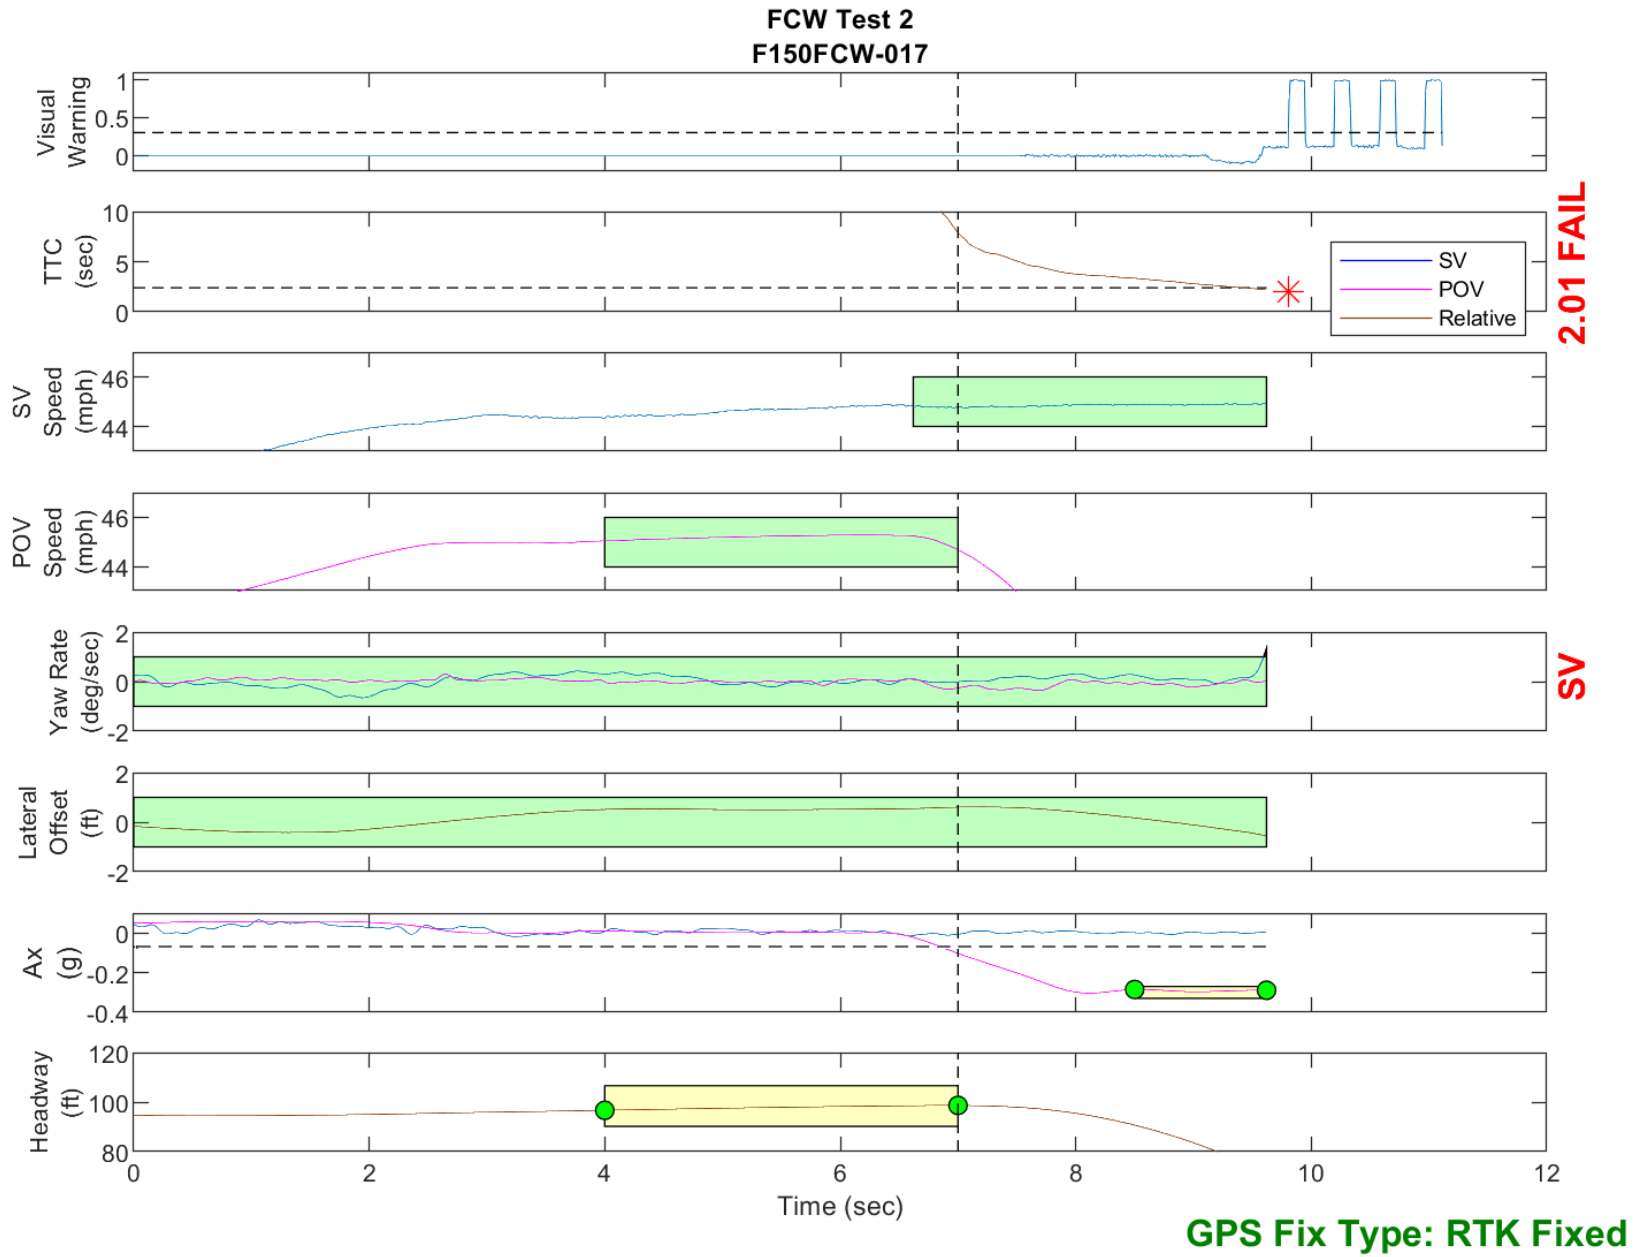


Figure D24. Time History for Run 17, FCW Test 2, Visual Warning

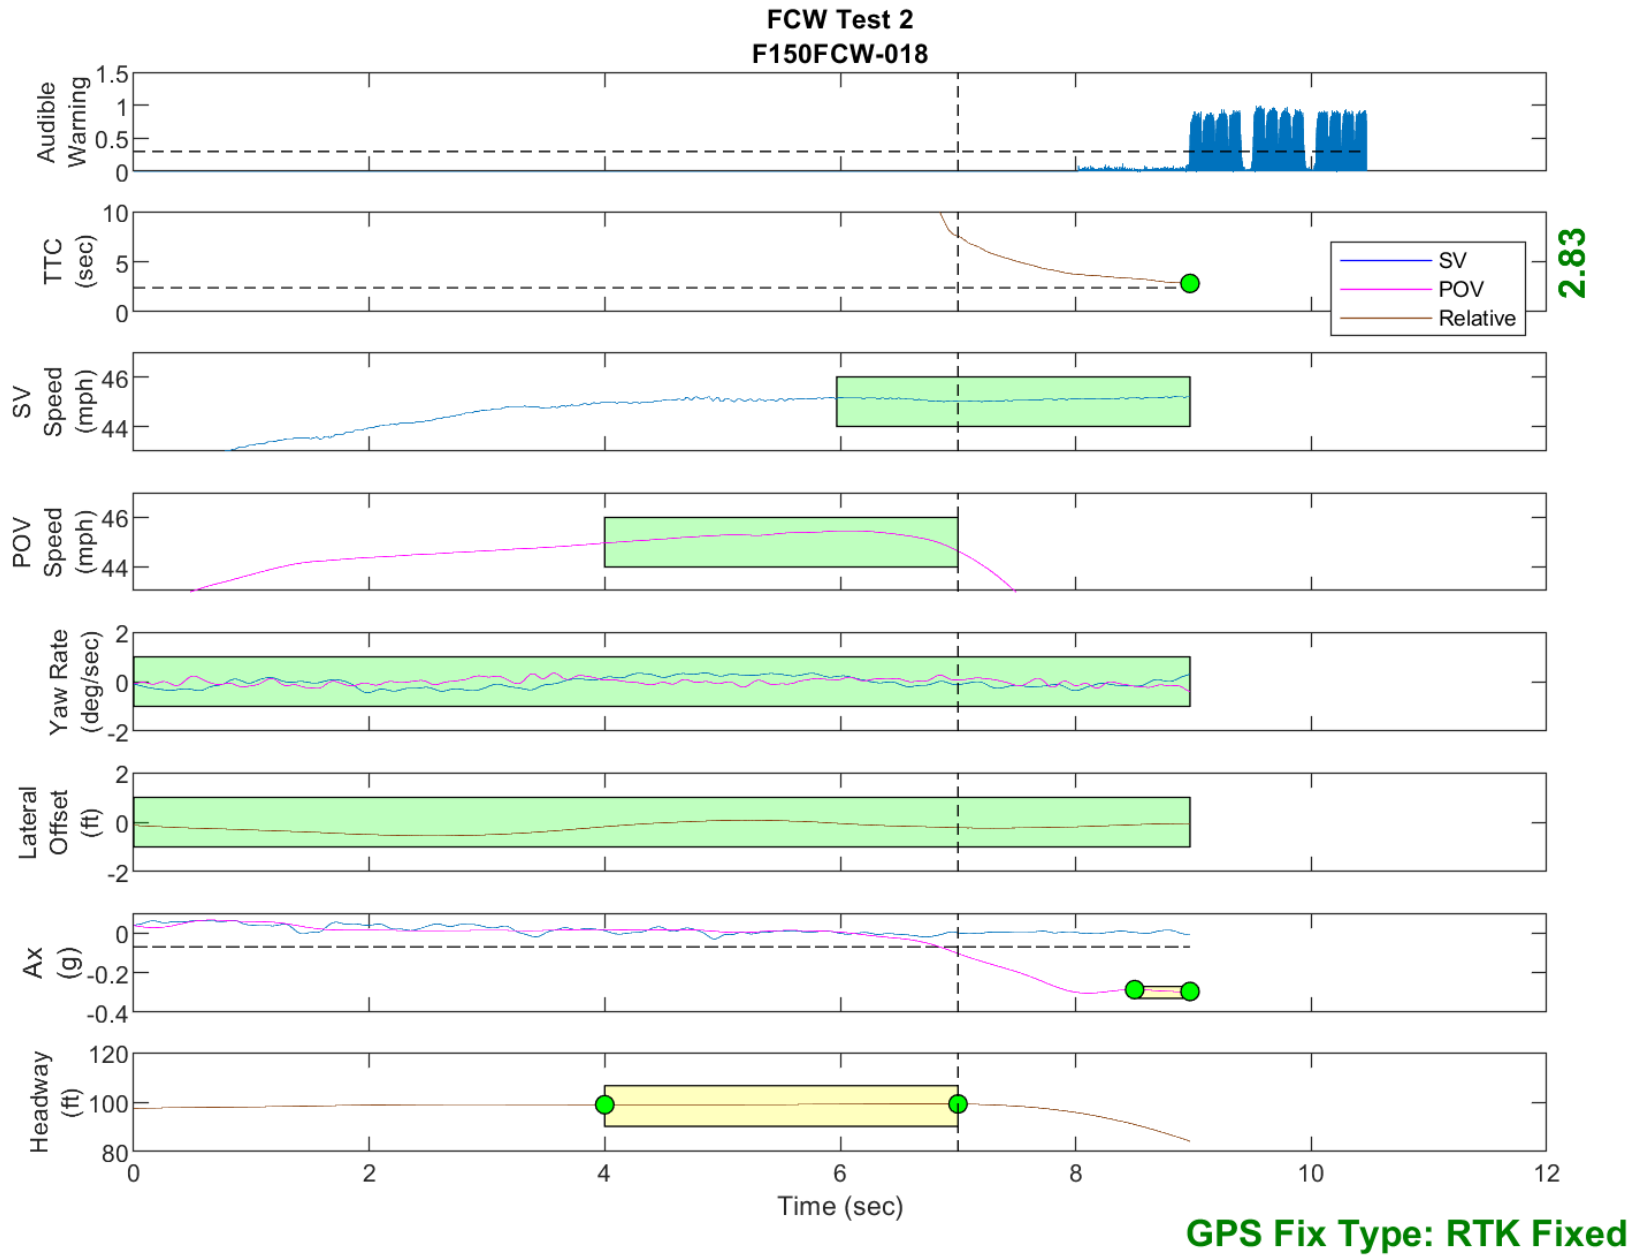


Figure D25. Time History for Run 18, FCW Test 2, Audible Warning

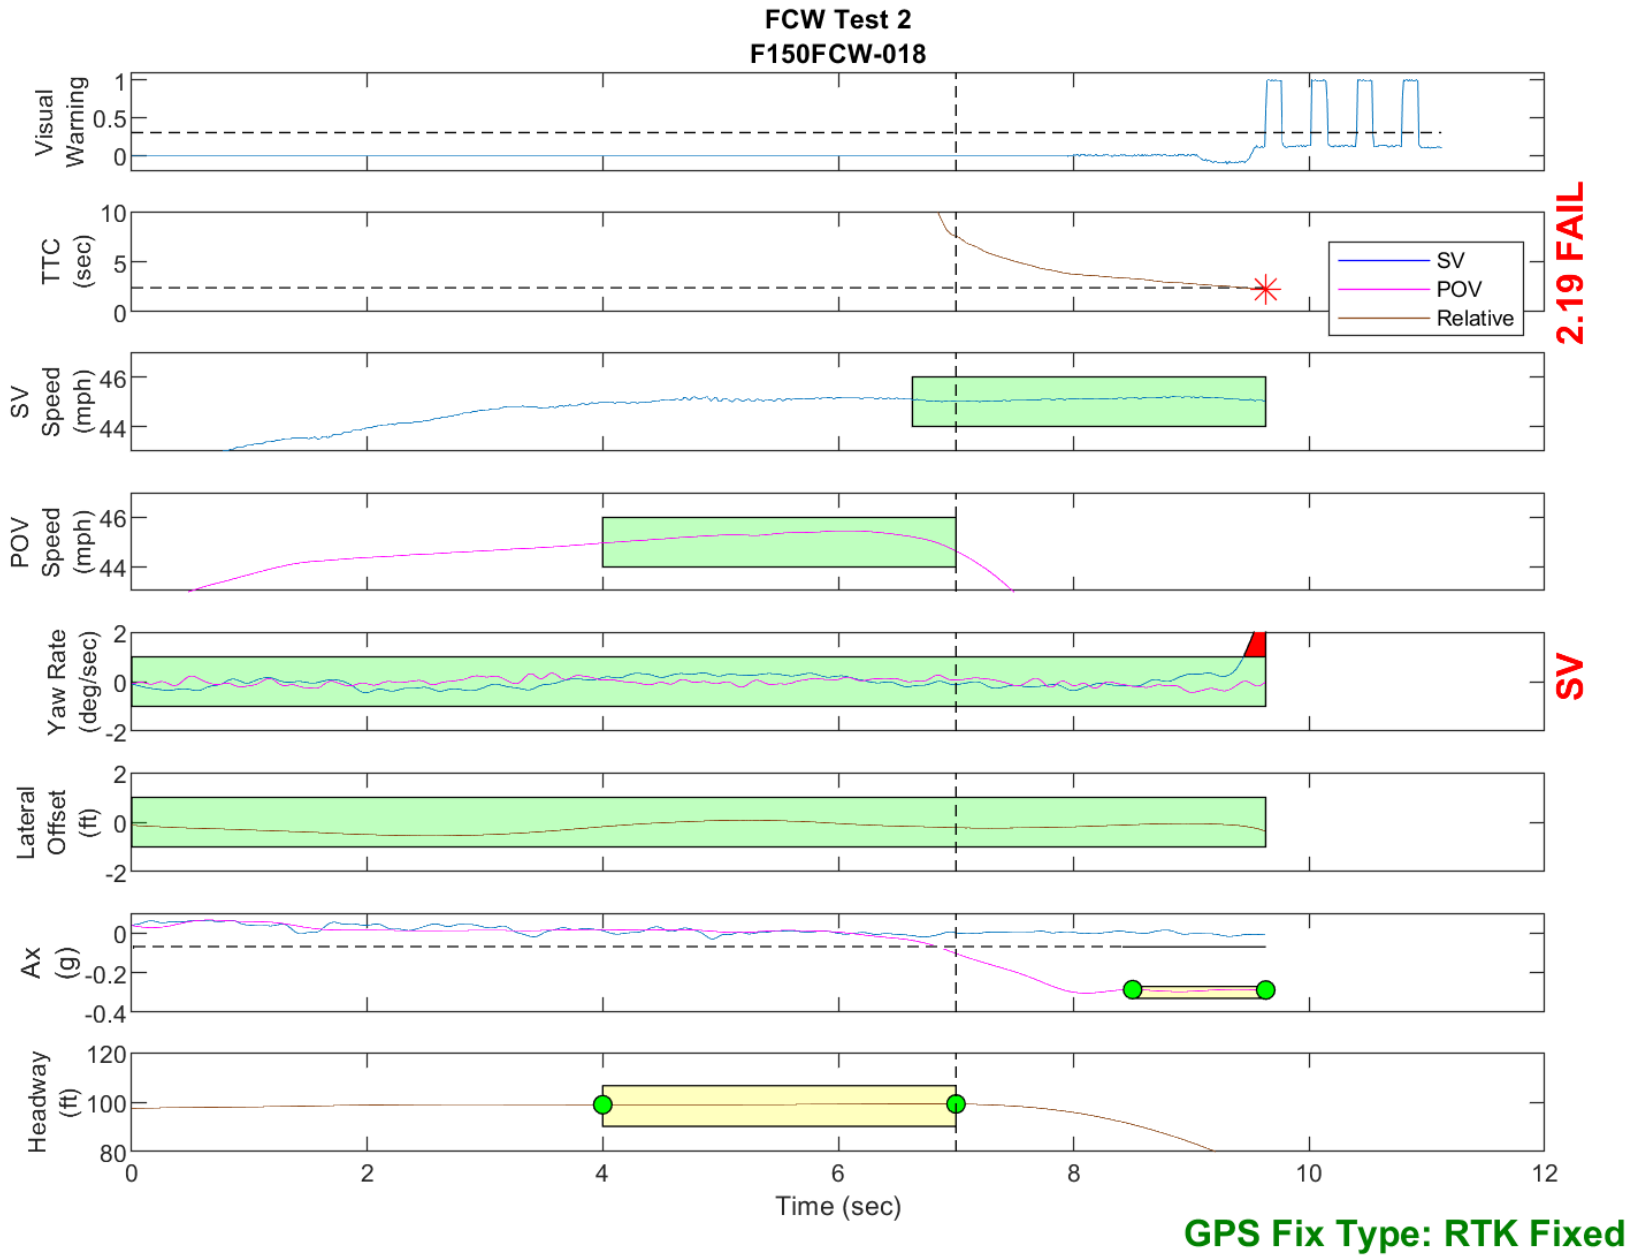


Figure D26. Time History for Run 18, FCW Test 2, Visual Warning

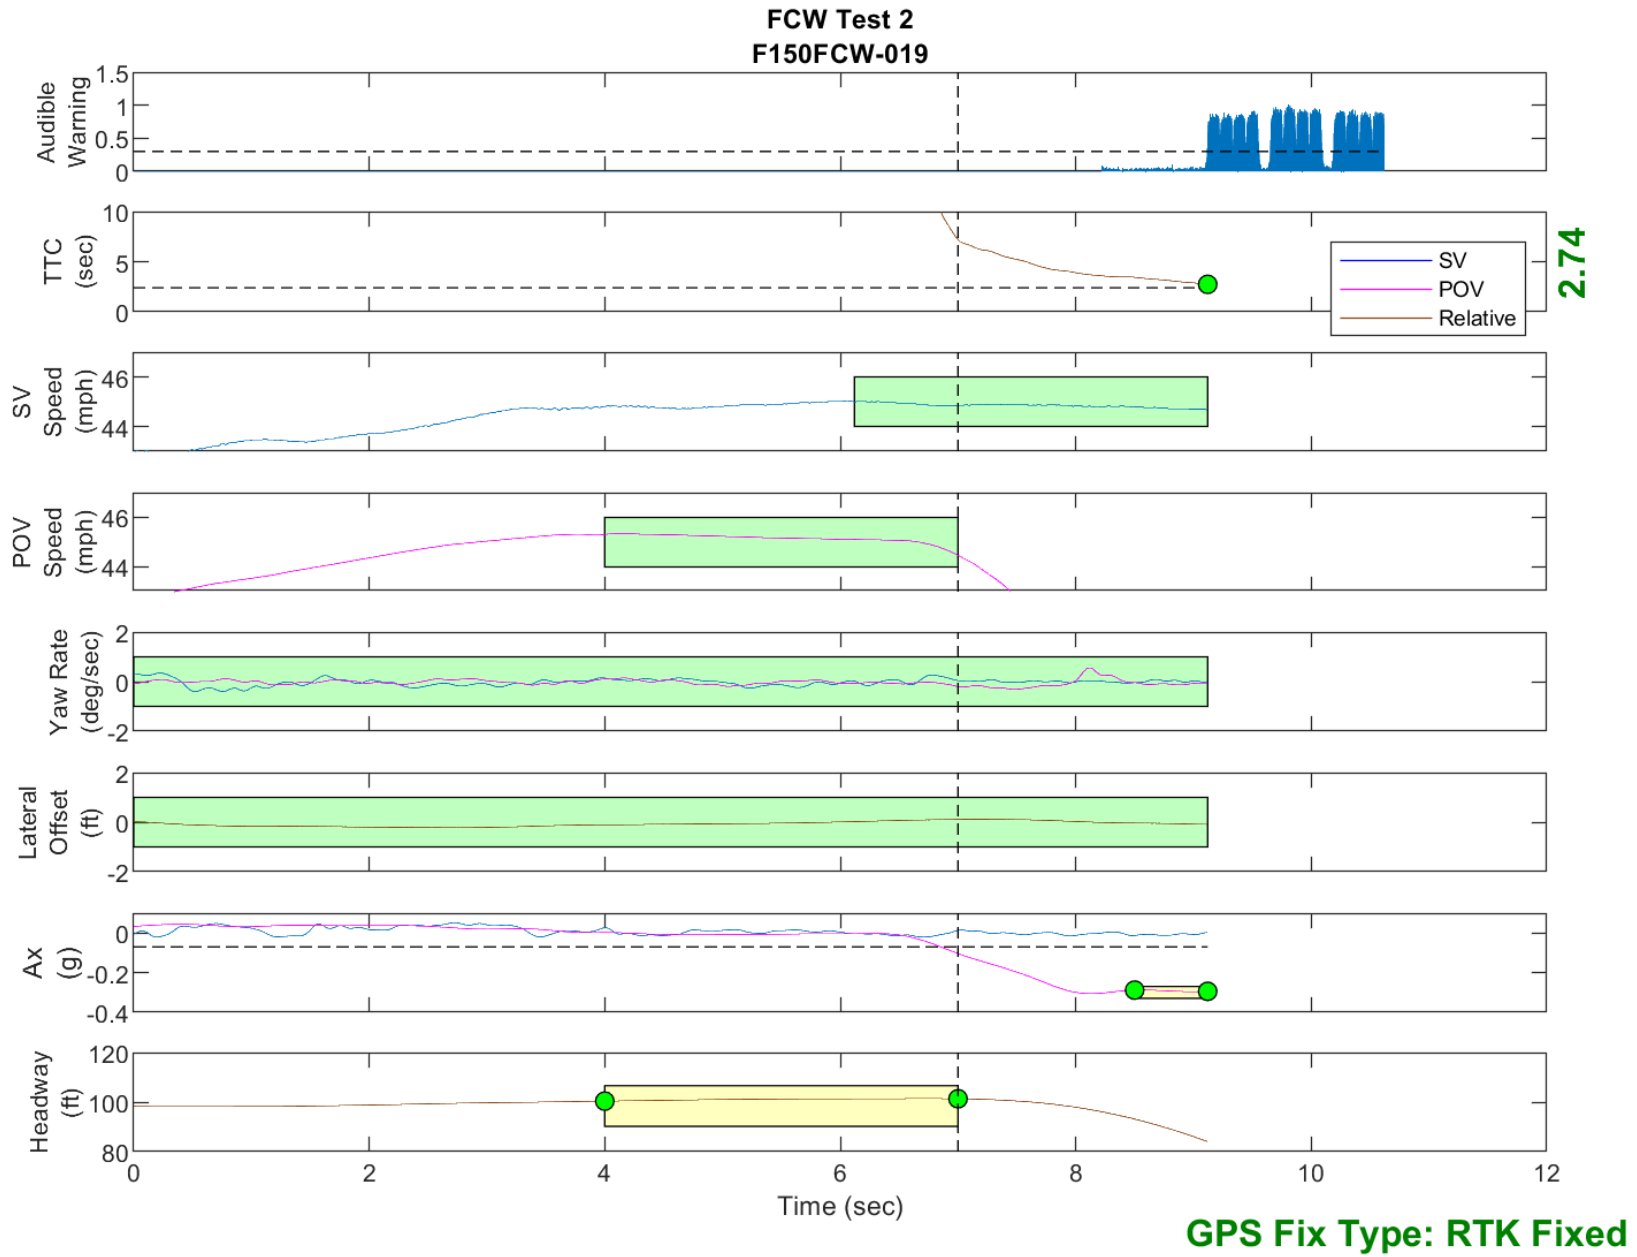


Figure D27. Time History for Run 19, FCW Test 2, Audible Warning

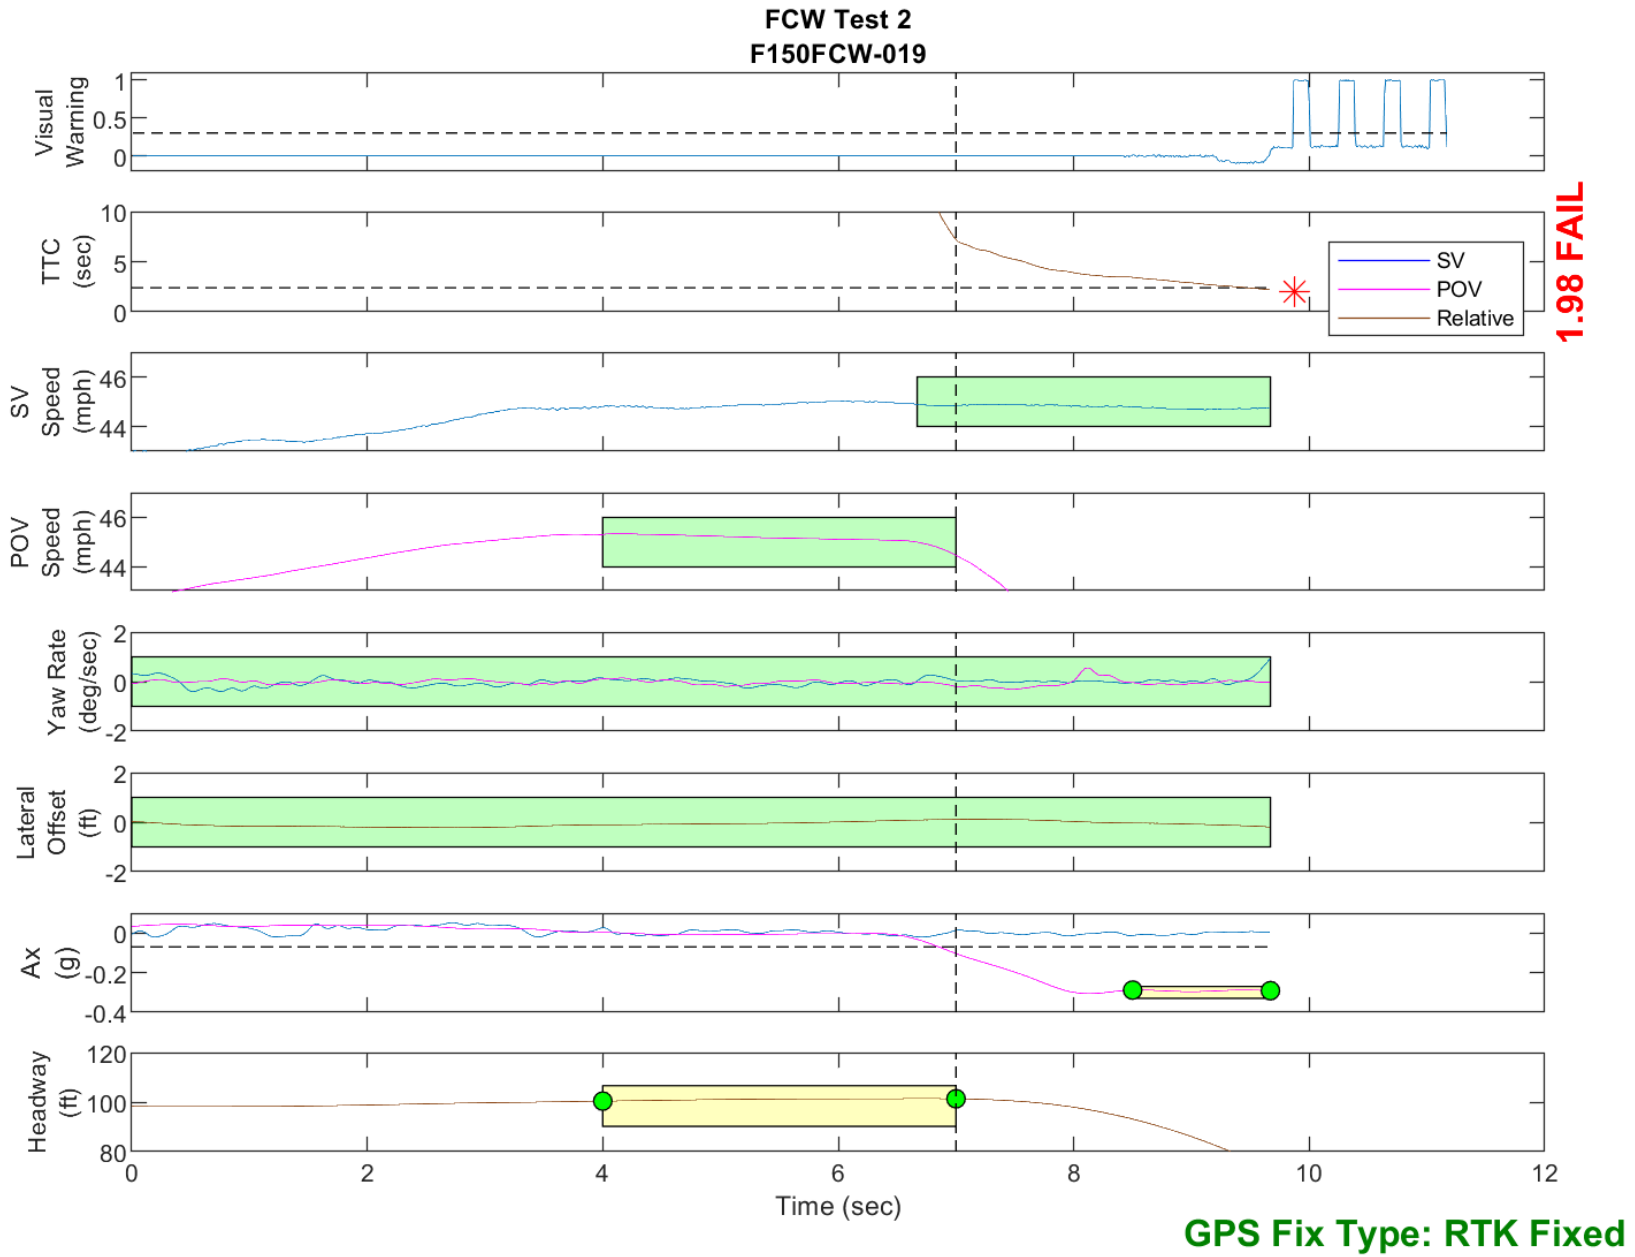


Figure D28. Time History for Run 19, FCW Test 2, Visual Warning

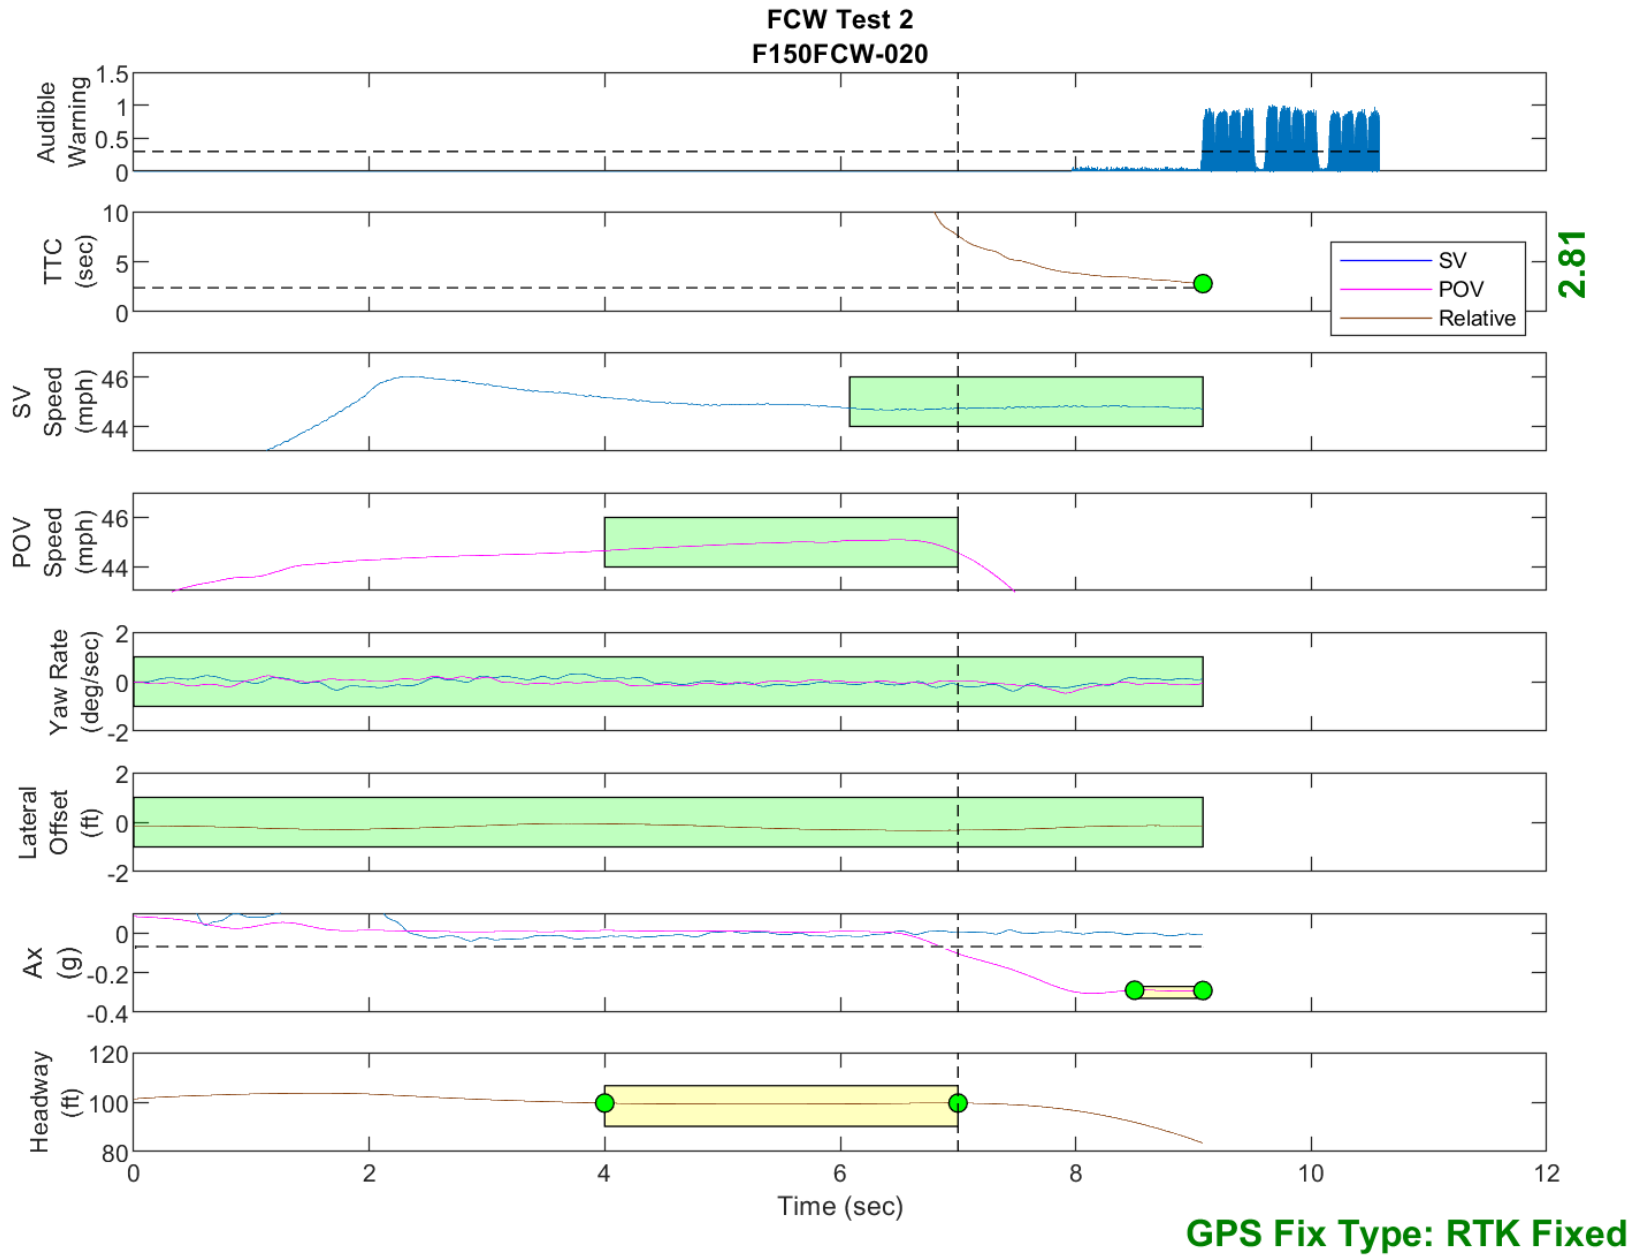


Figure D29. Time History for Run 20, FCW Test 2, Audible Warning

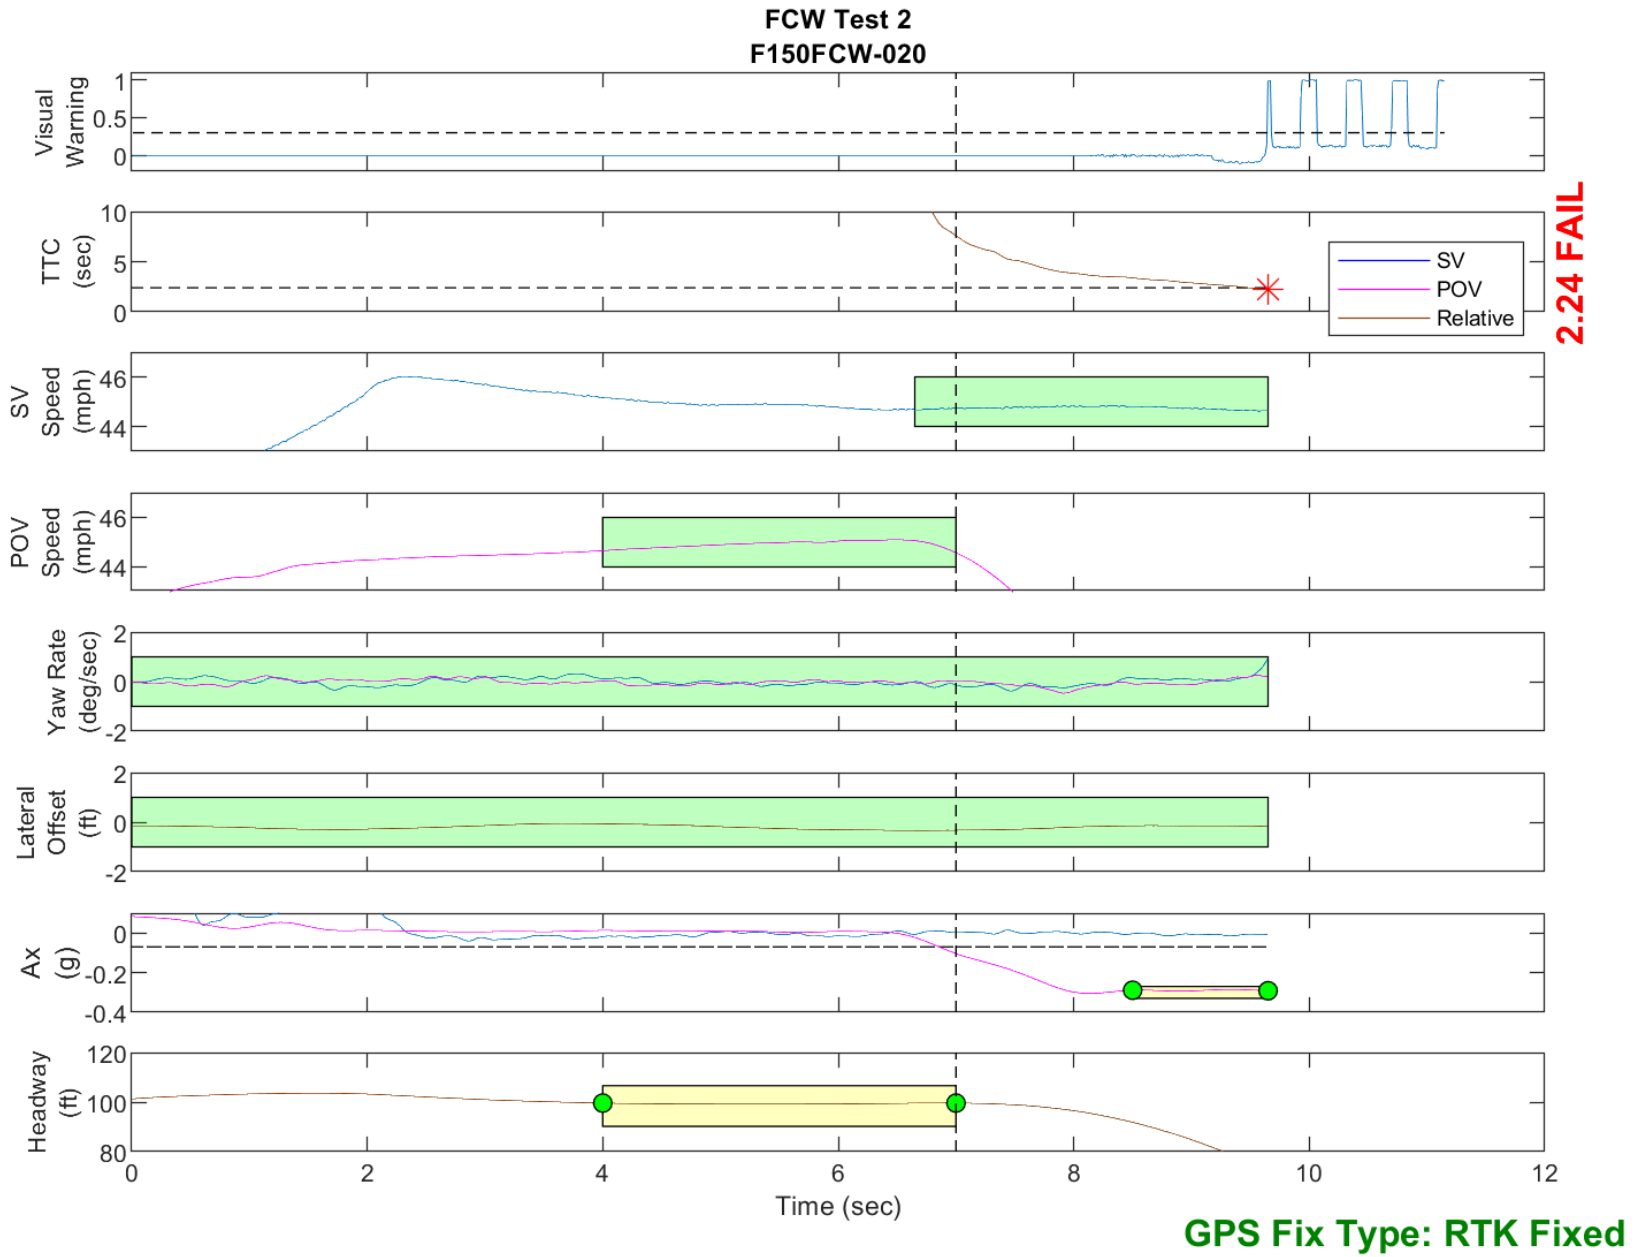


Figure D30. Time History for Run 20, FCW Test 2, Visual Warning

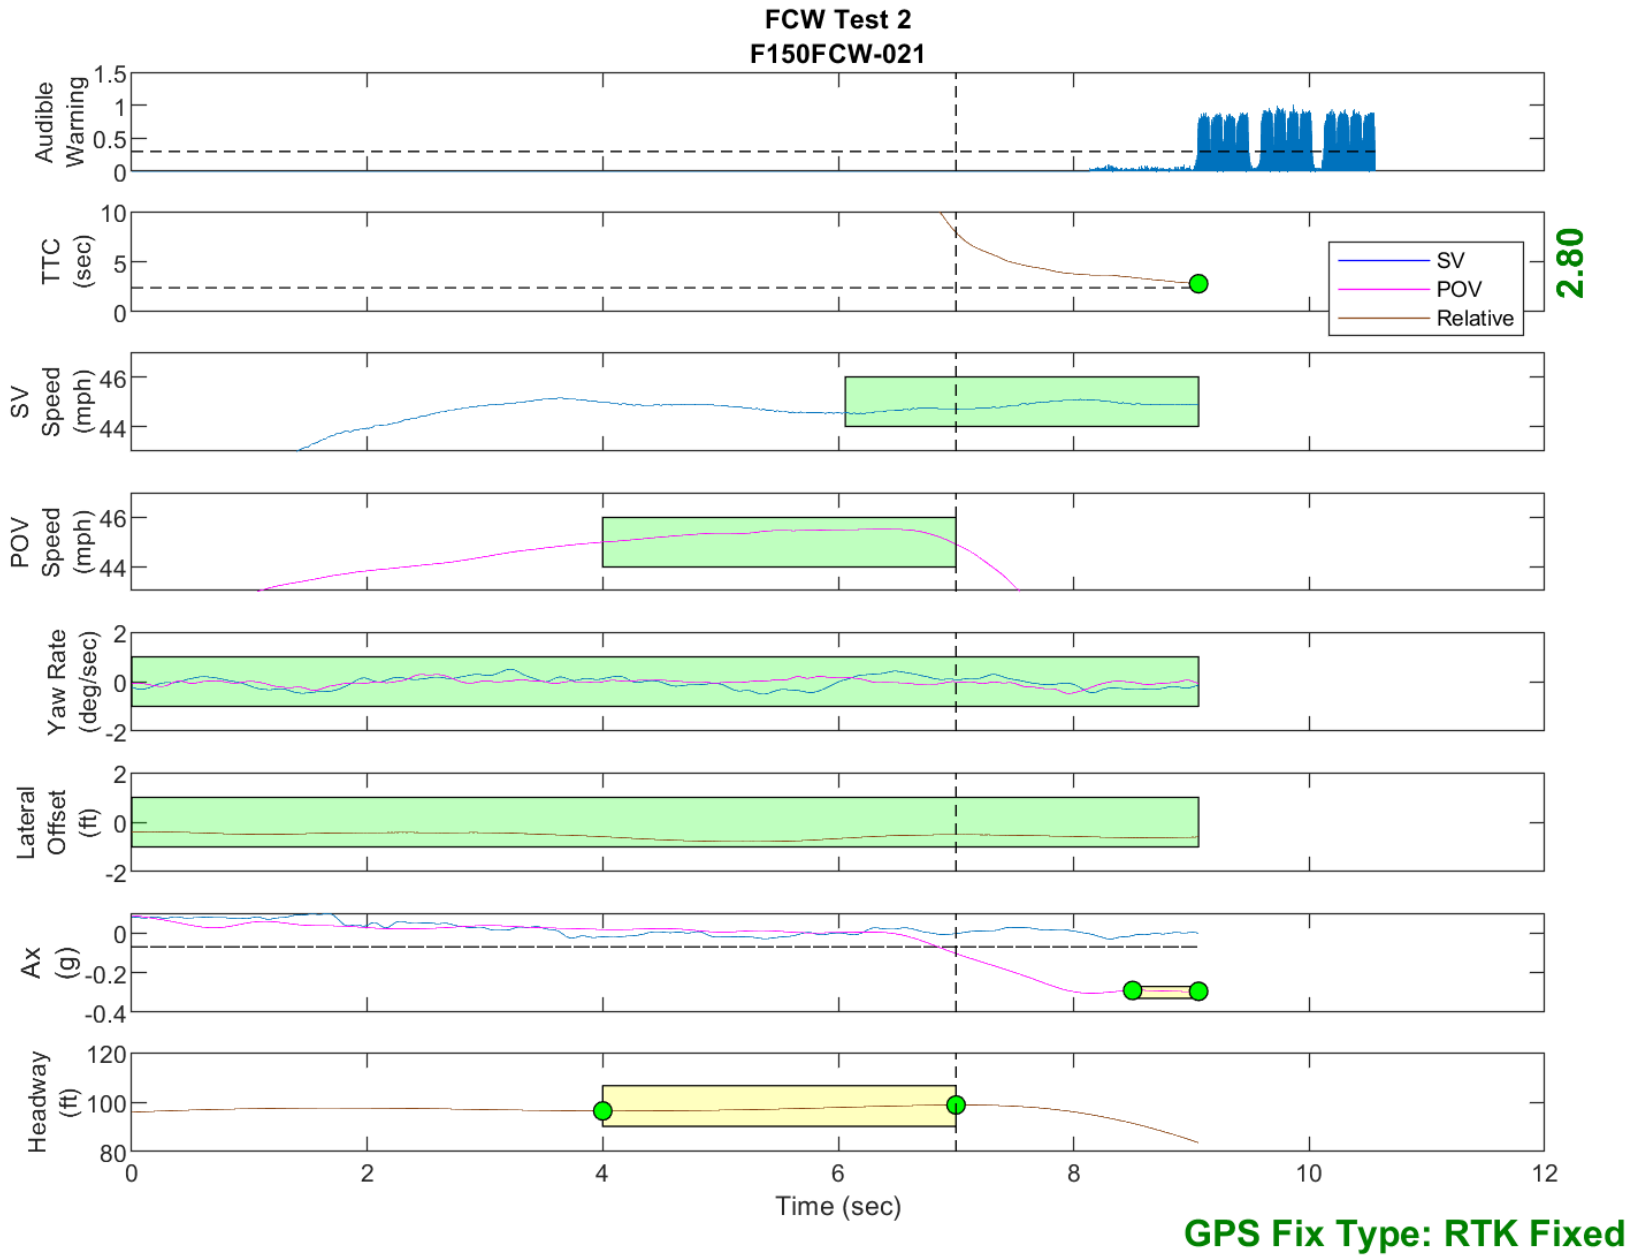


Figure D31. Time History for Run 21, FCW Test 2, Audible Warning

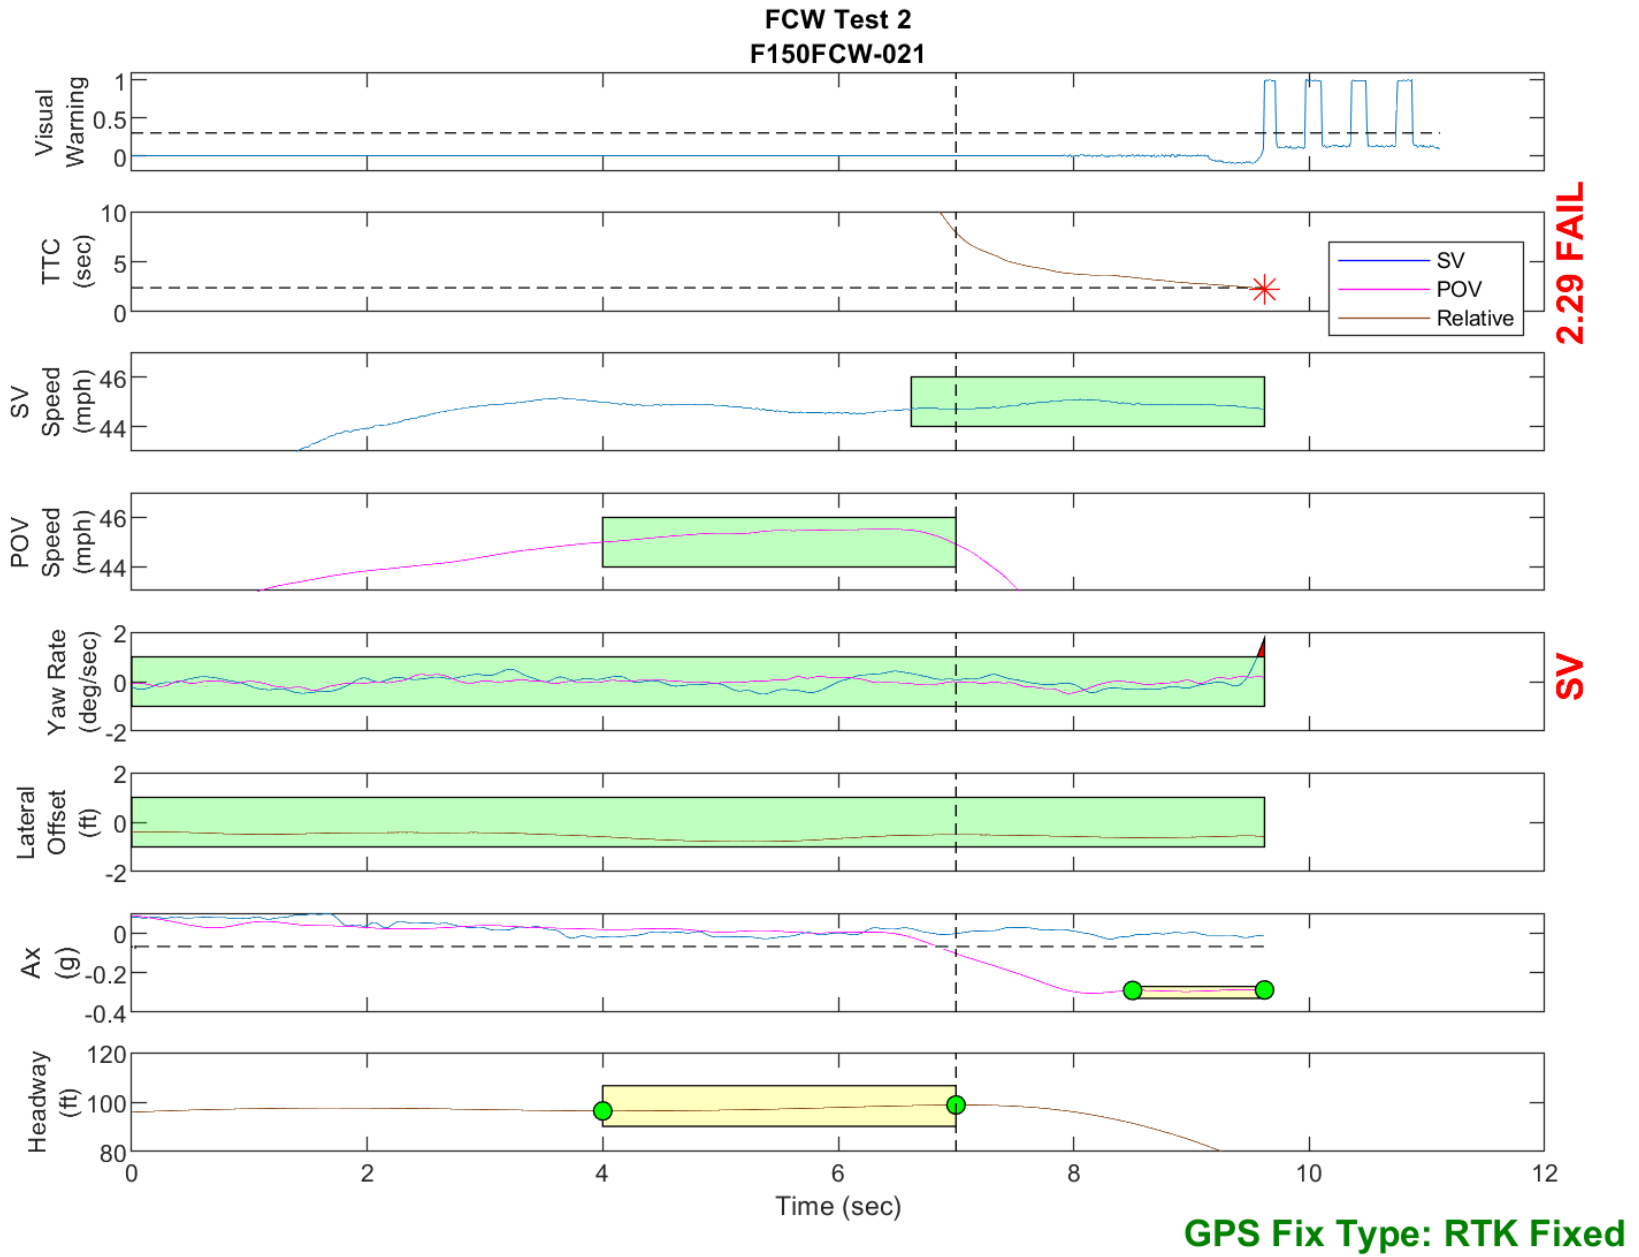


Figure D32. Time History for Run 21, FCW Test 2, Visual Warning

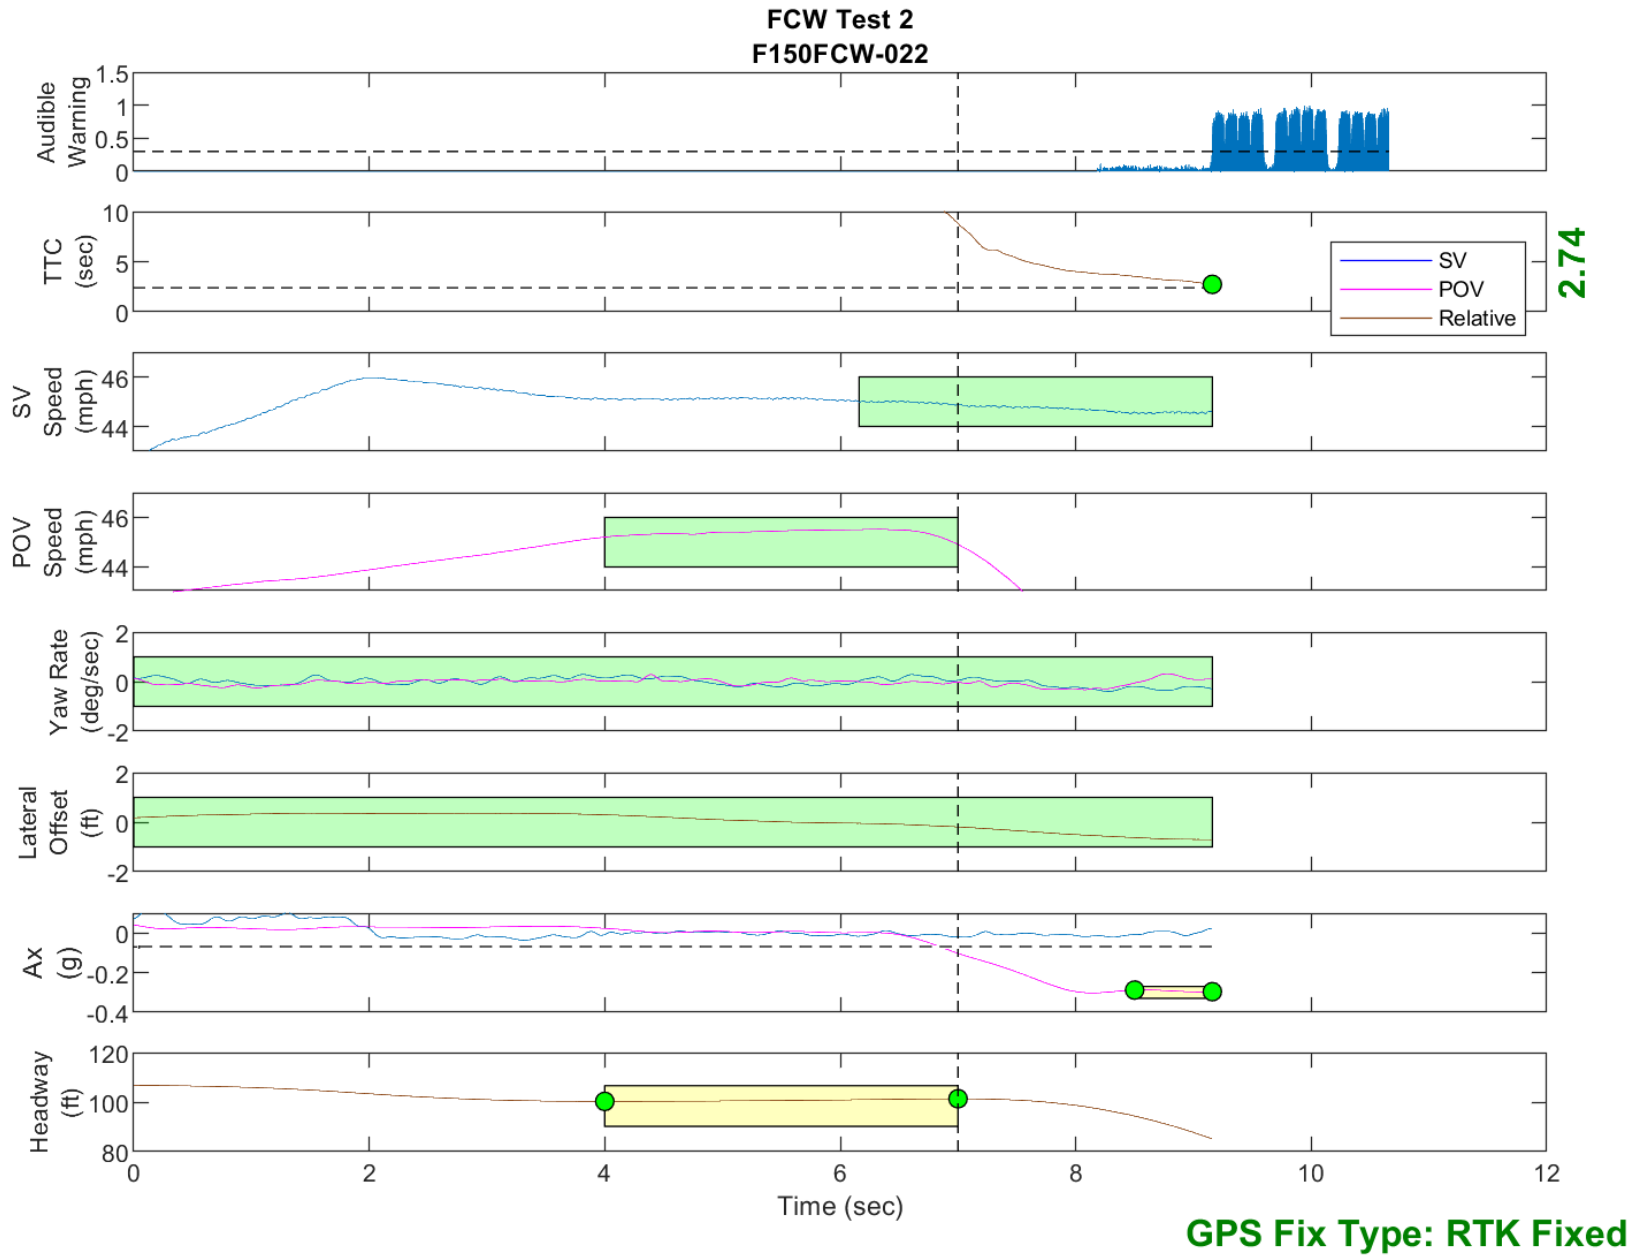


Figure D33. Time History for Run 22, FCW Test 2, Audible Warning

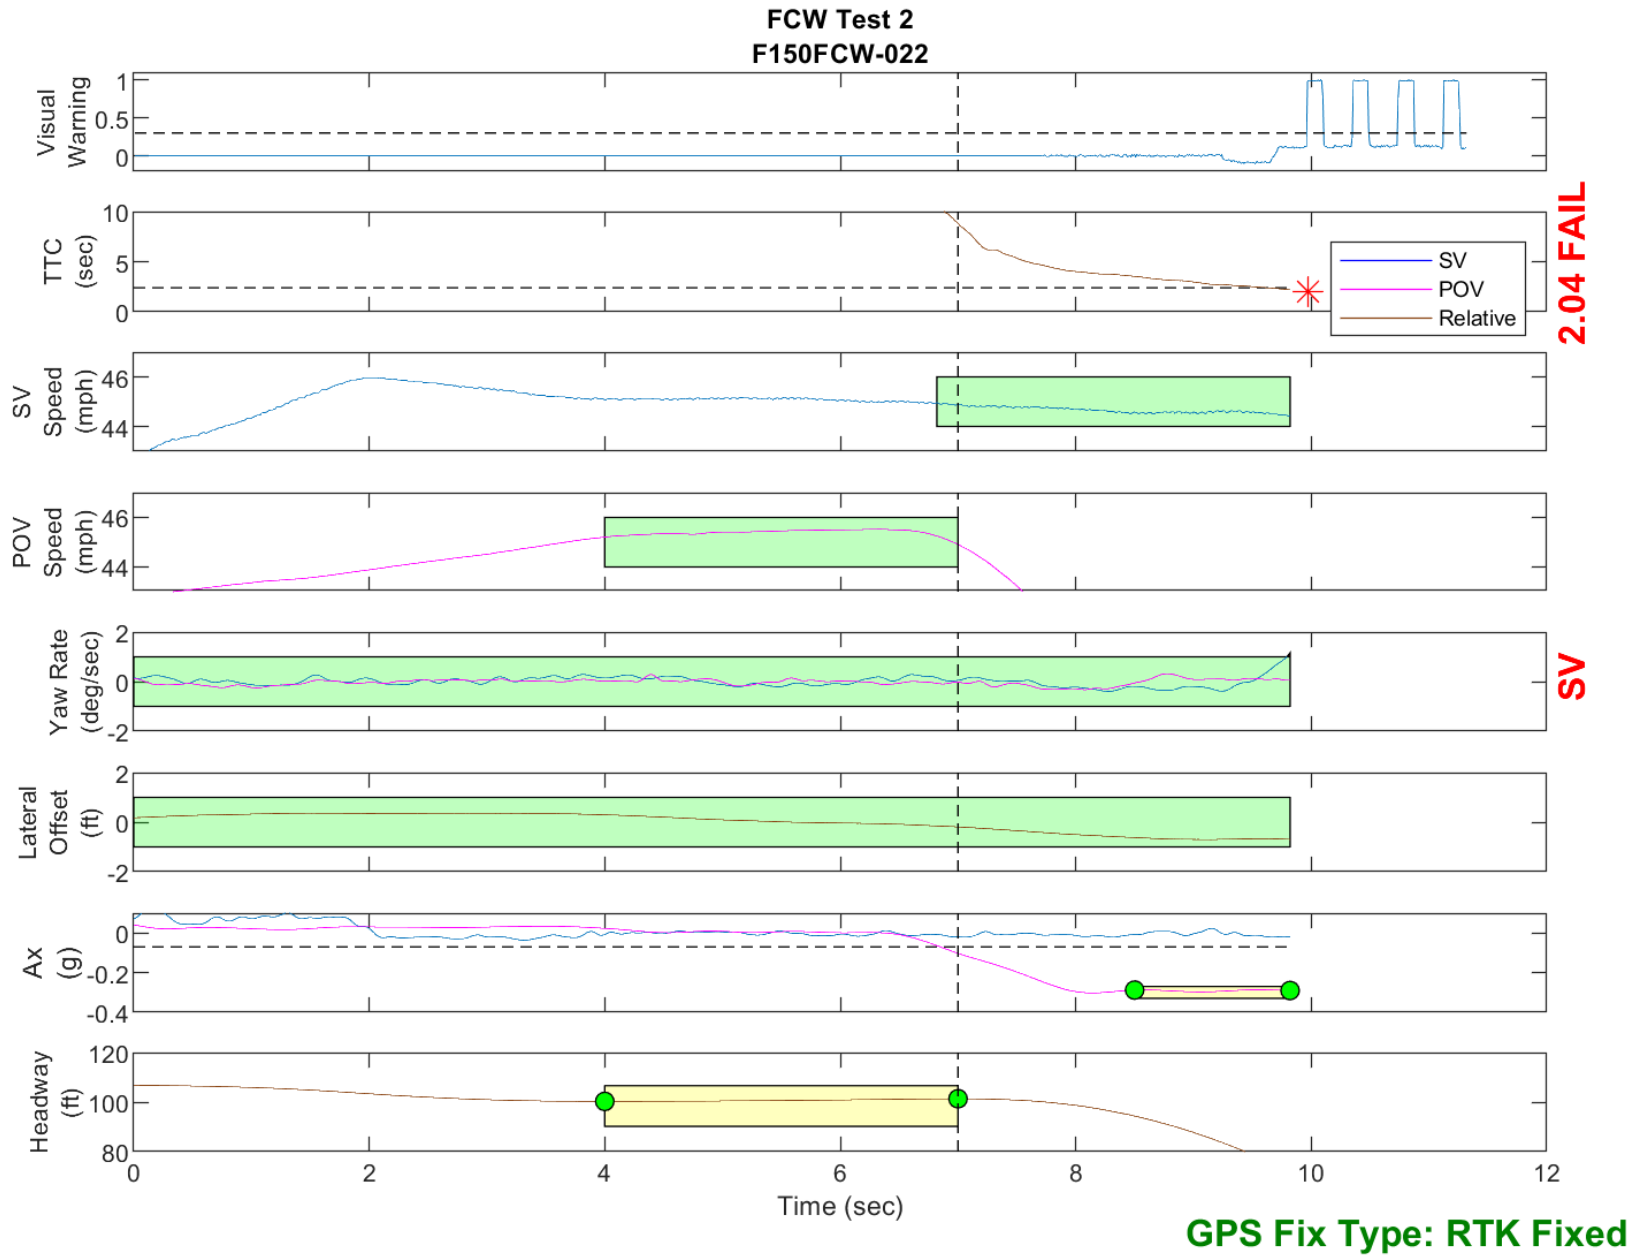


Figure D34. Time History for Run 22, FCW Test 2, Visual Warning

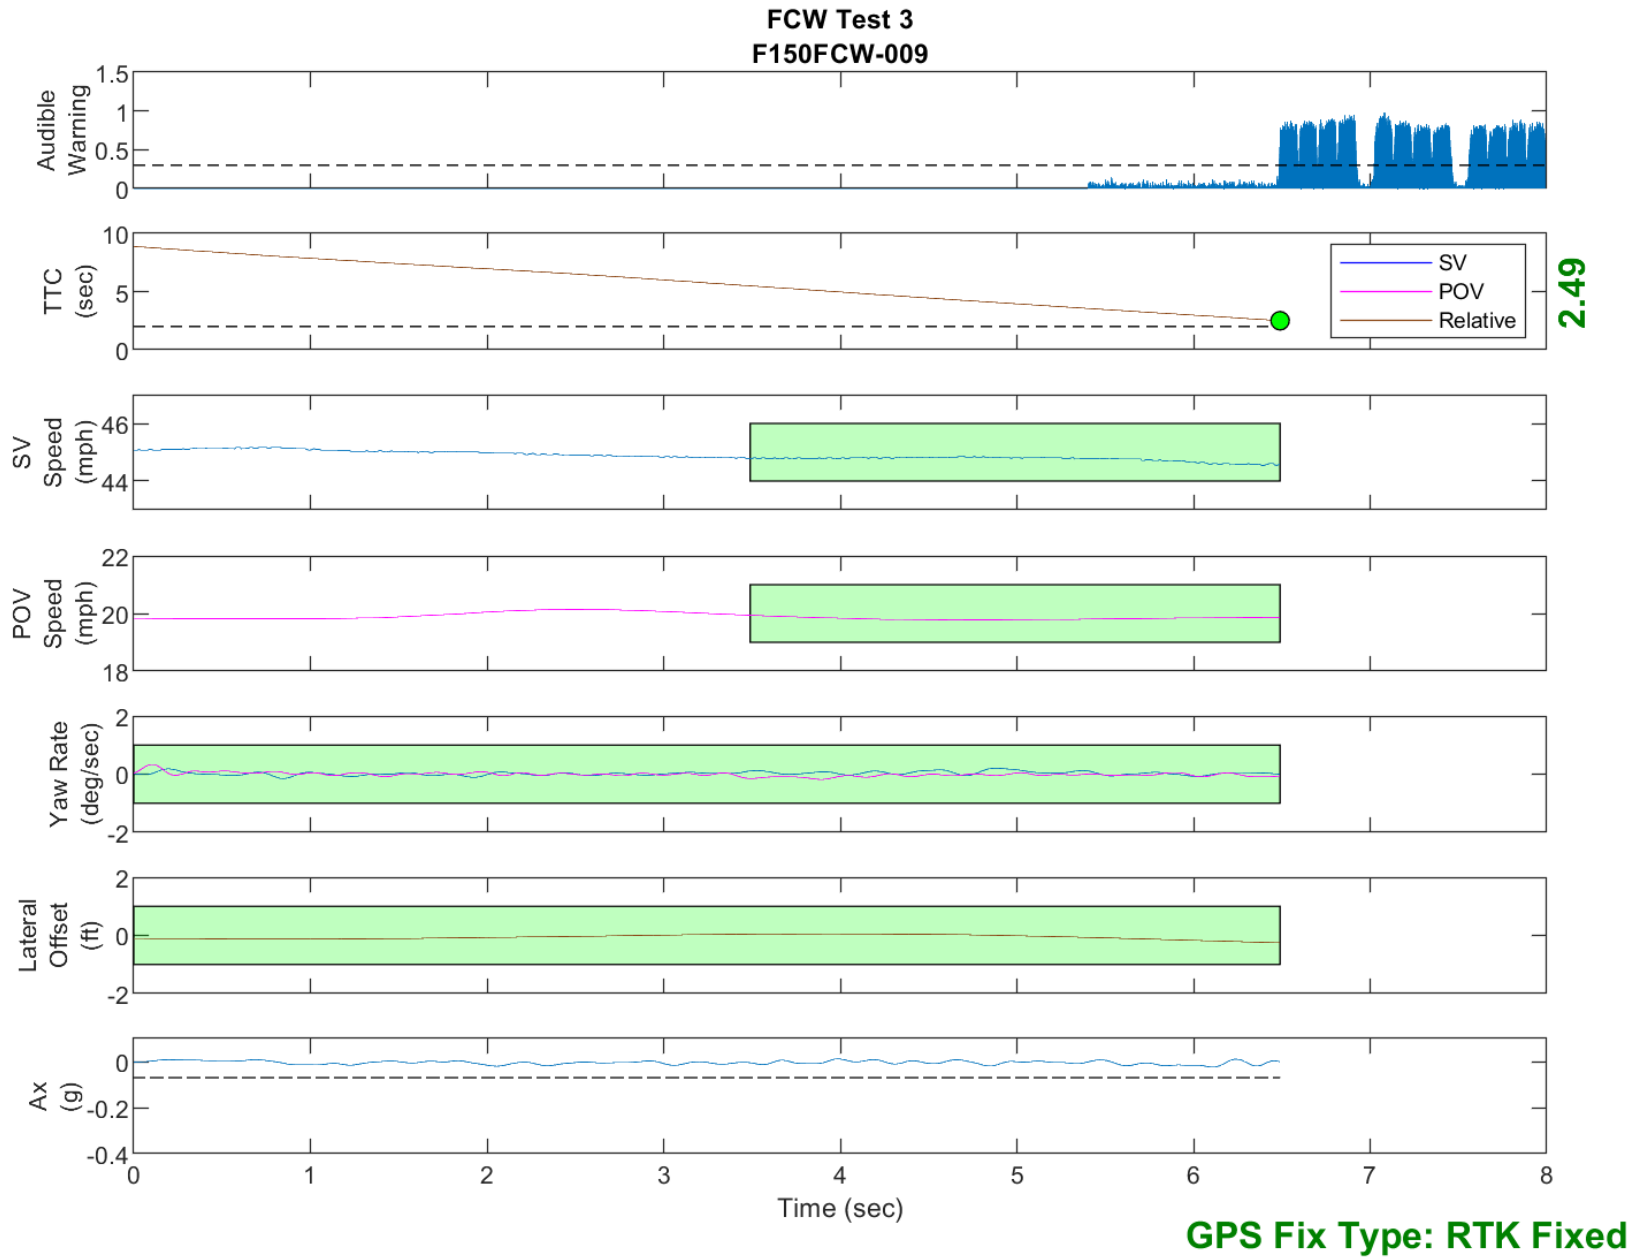


Figure D35. Time History for Run 9, FCW Test 3, Audible Warning

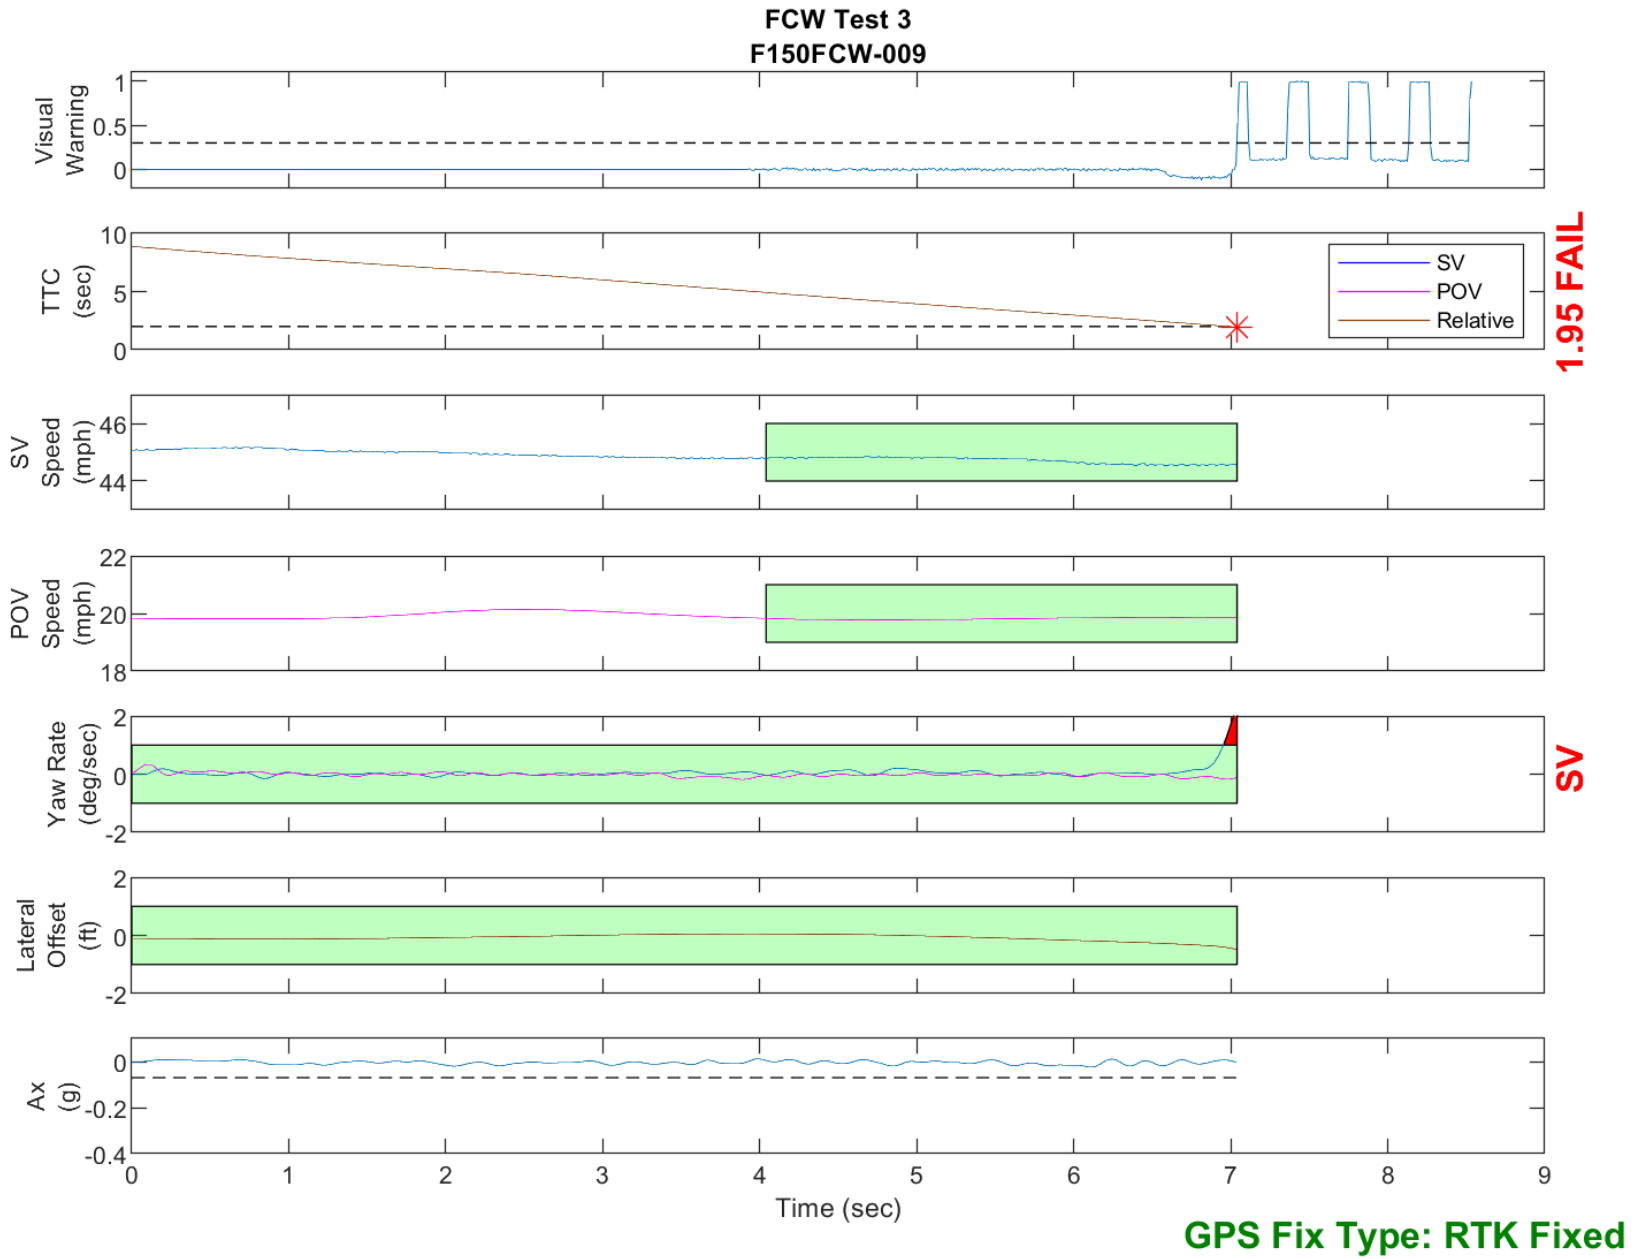


Figure D36. Time History for Run 9, FCW Test 3, Visual Warning

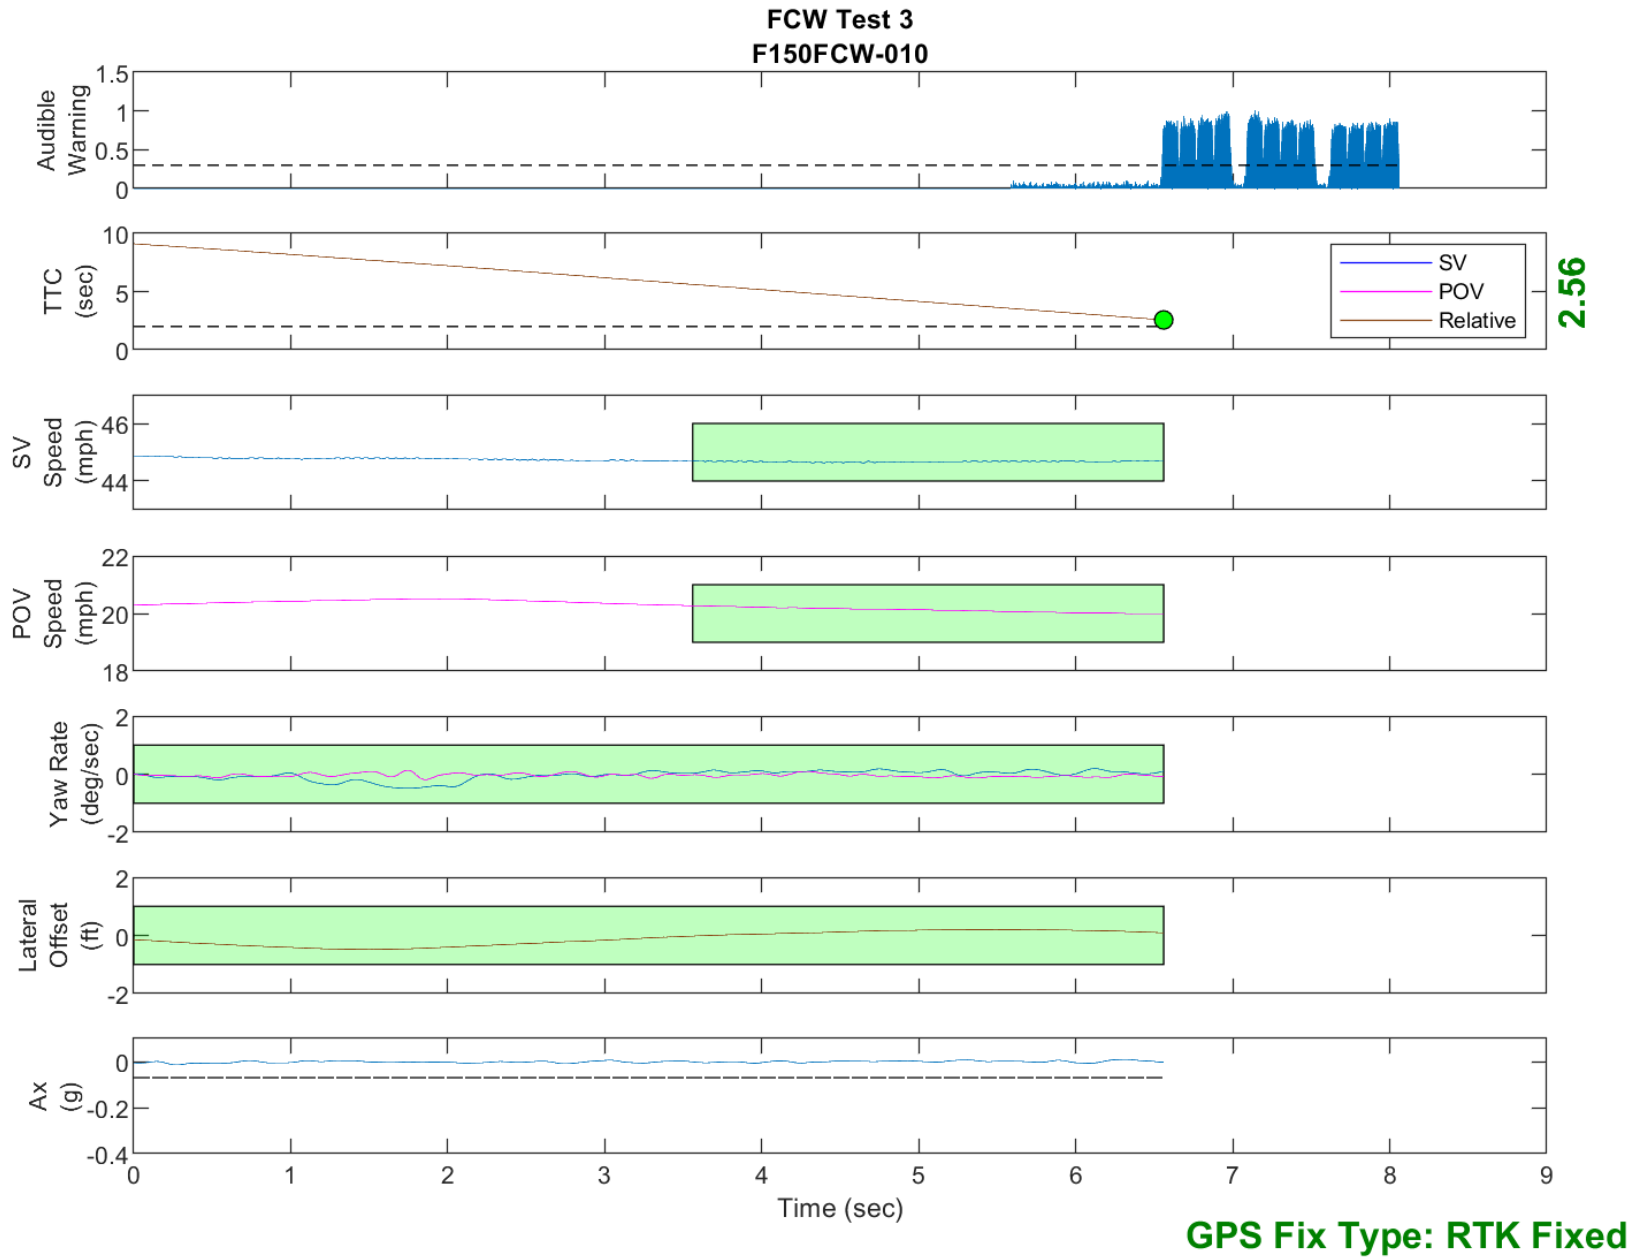


Figure D37. Time History for Run 10, FCW Test 3, Audible Warning

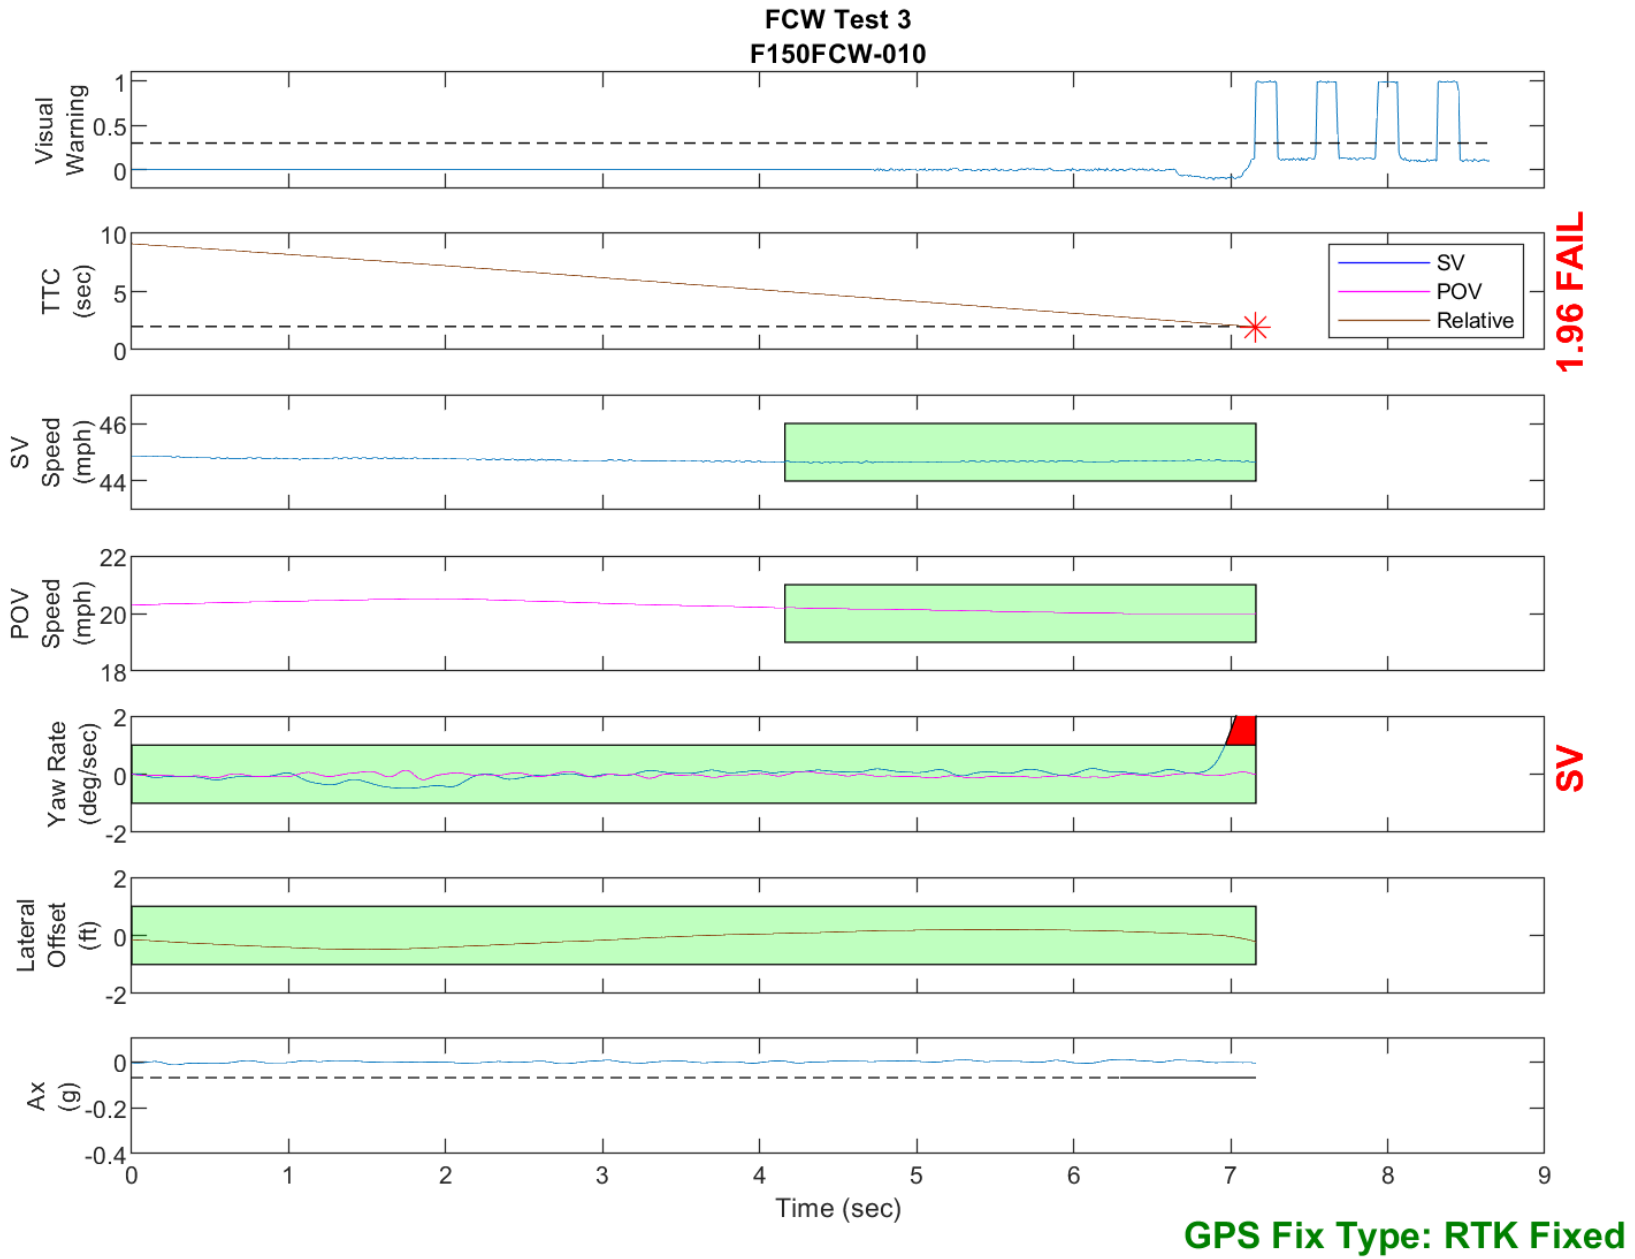


Figure D38. Time History for Run 10, FCW Test 3, Visual Warning

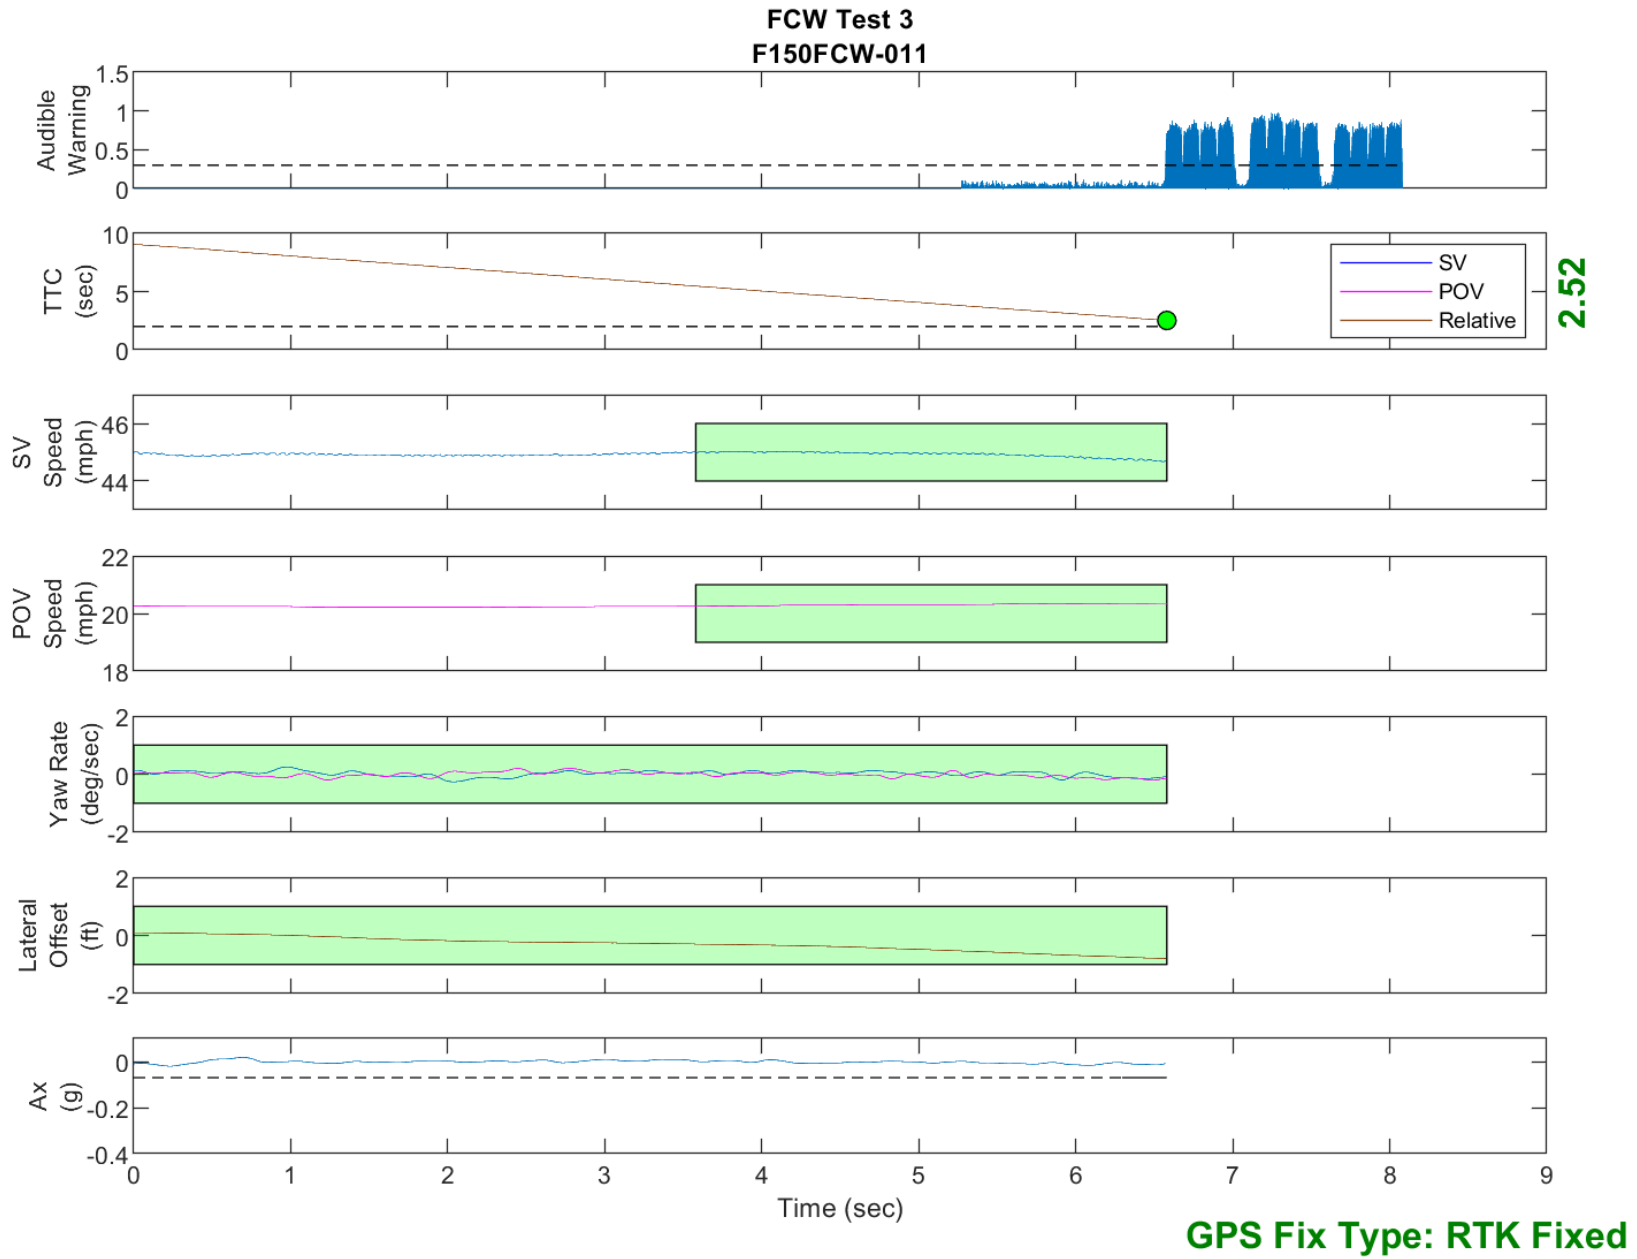


Figure D39. Time History for Run 11, FCW Test 3, Audible Warning

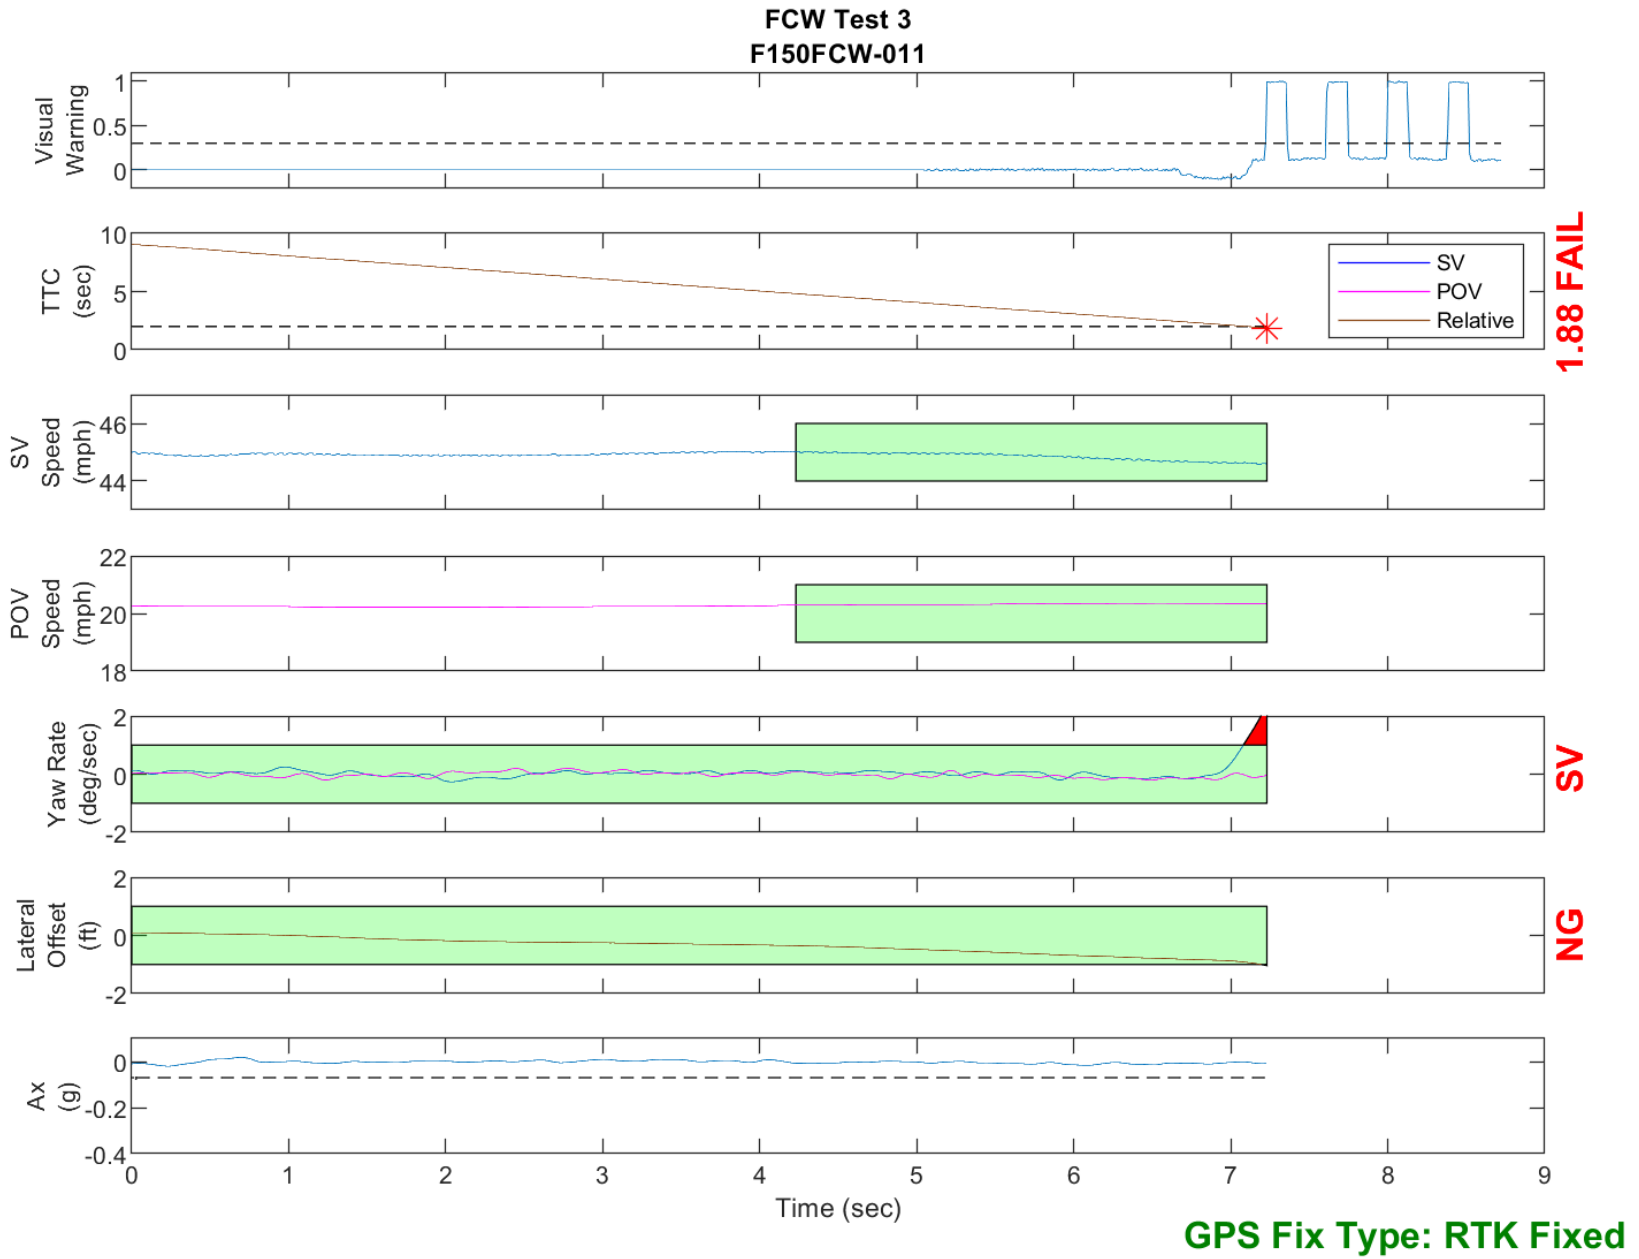


Figure D40. Time History for Run 11, FCW Test 3, Visual Warning

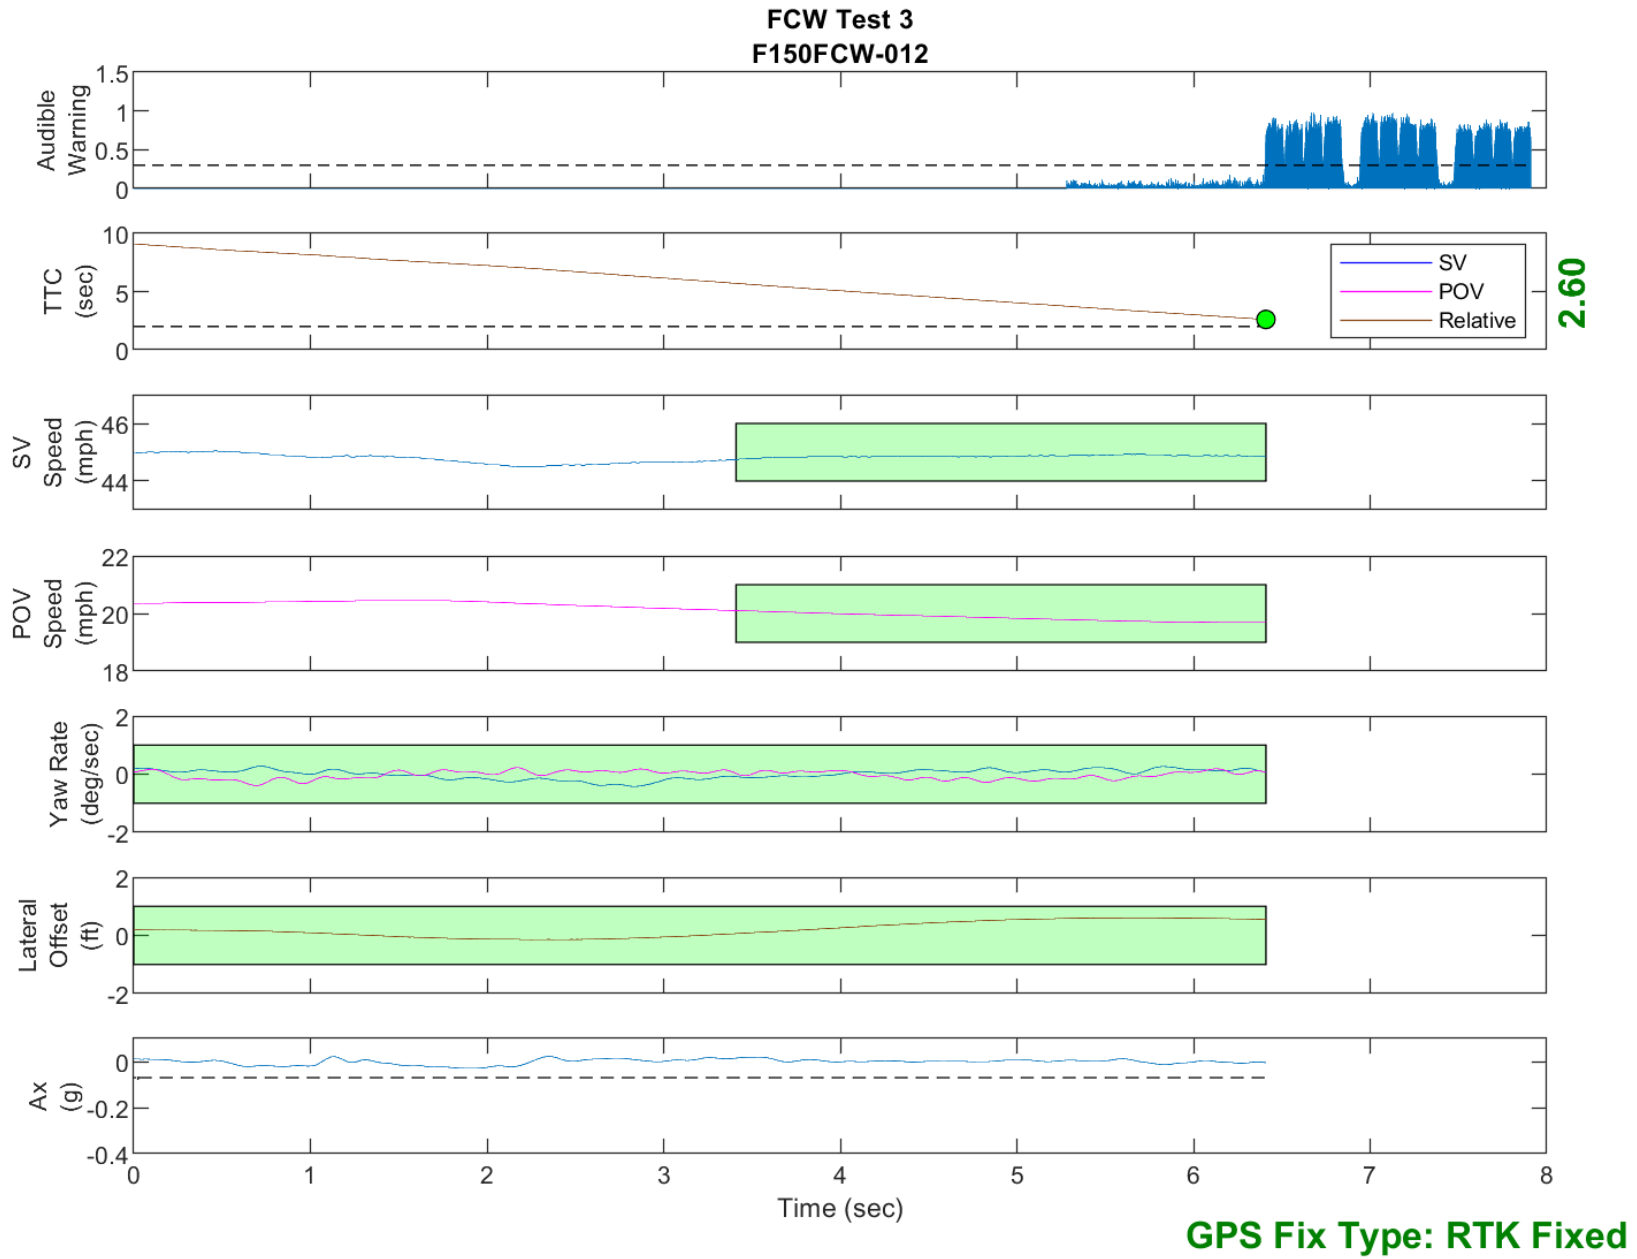


Figure D41. Time History for Run 12, FCW Test 3, Audible Warning

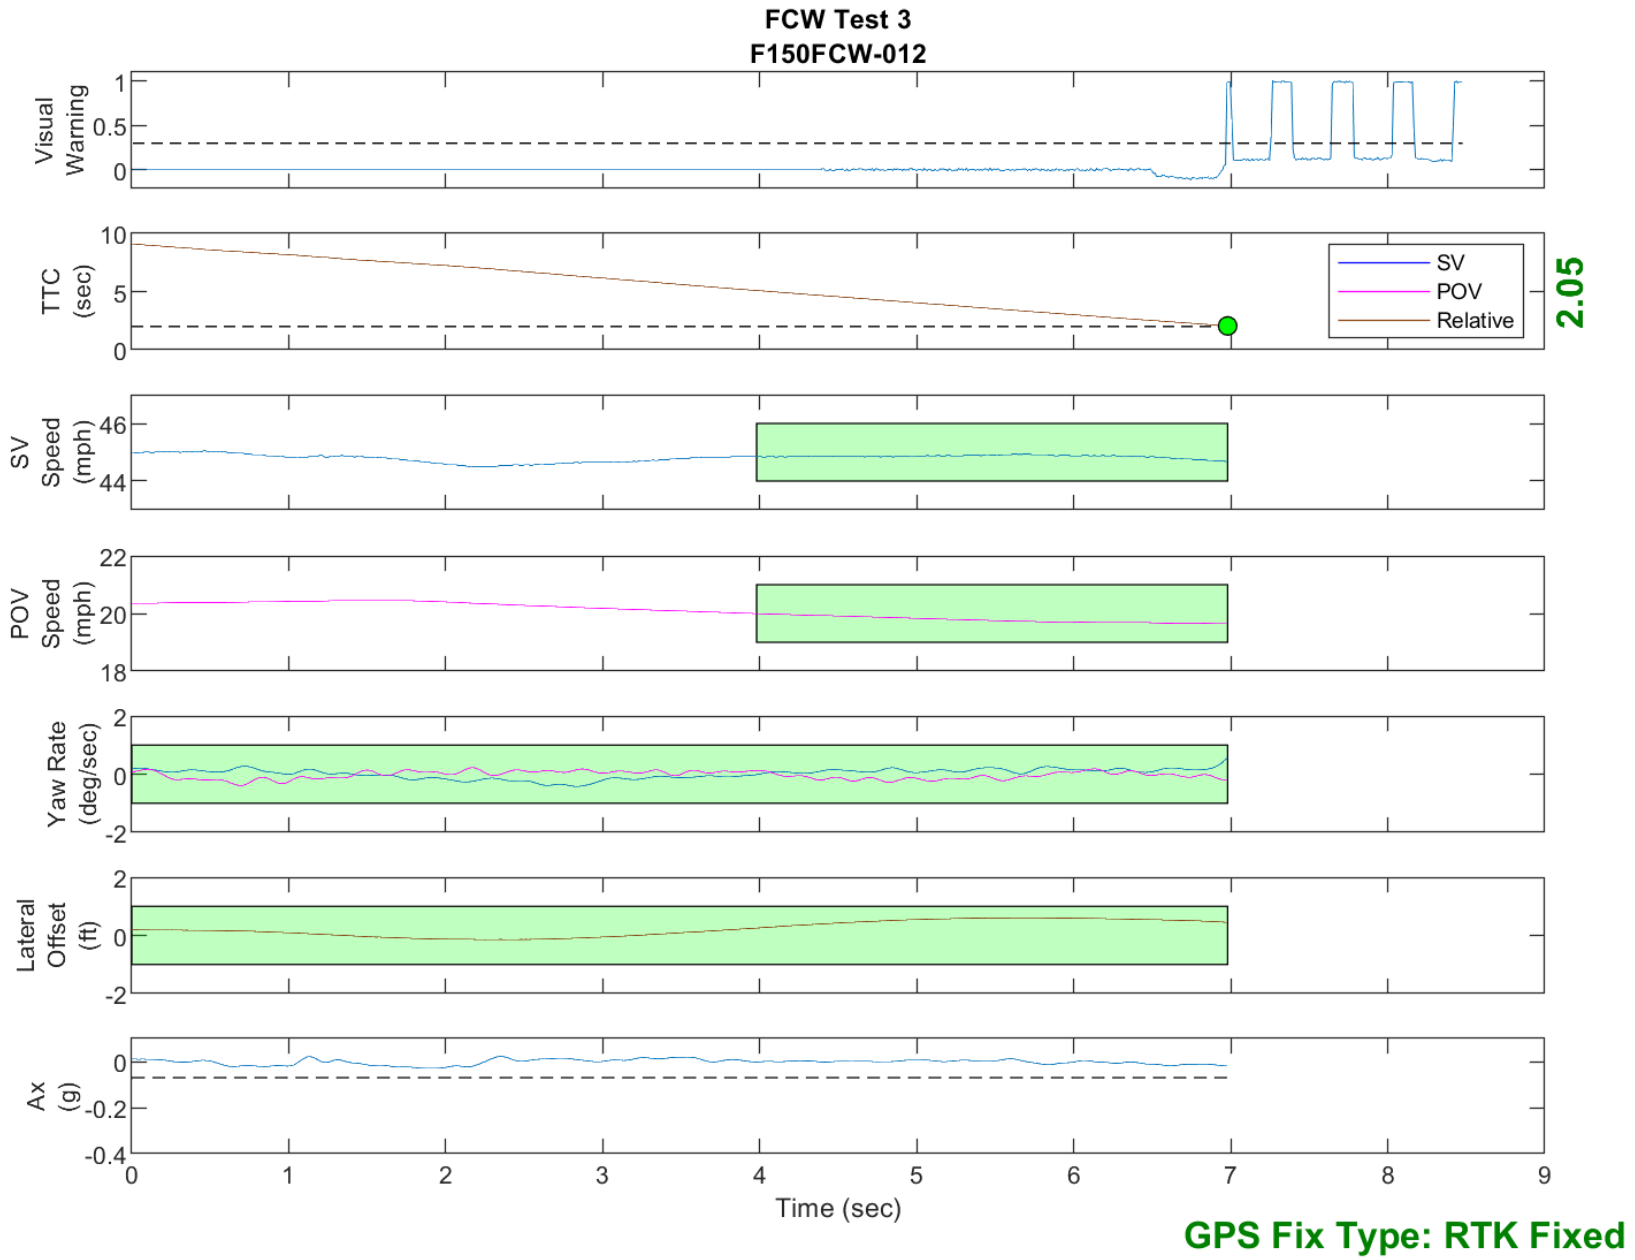


Figure D42. Time History for Run 12, FCW Test 3, Visual Warning

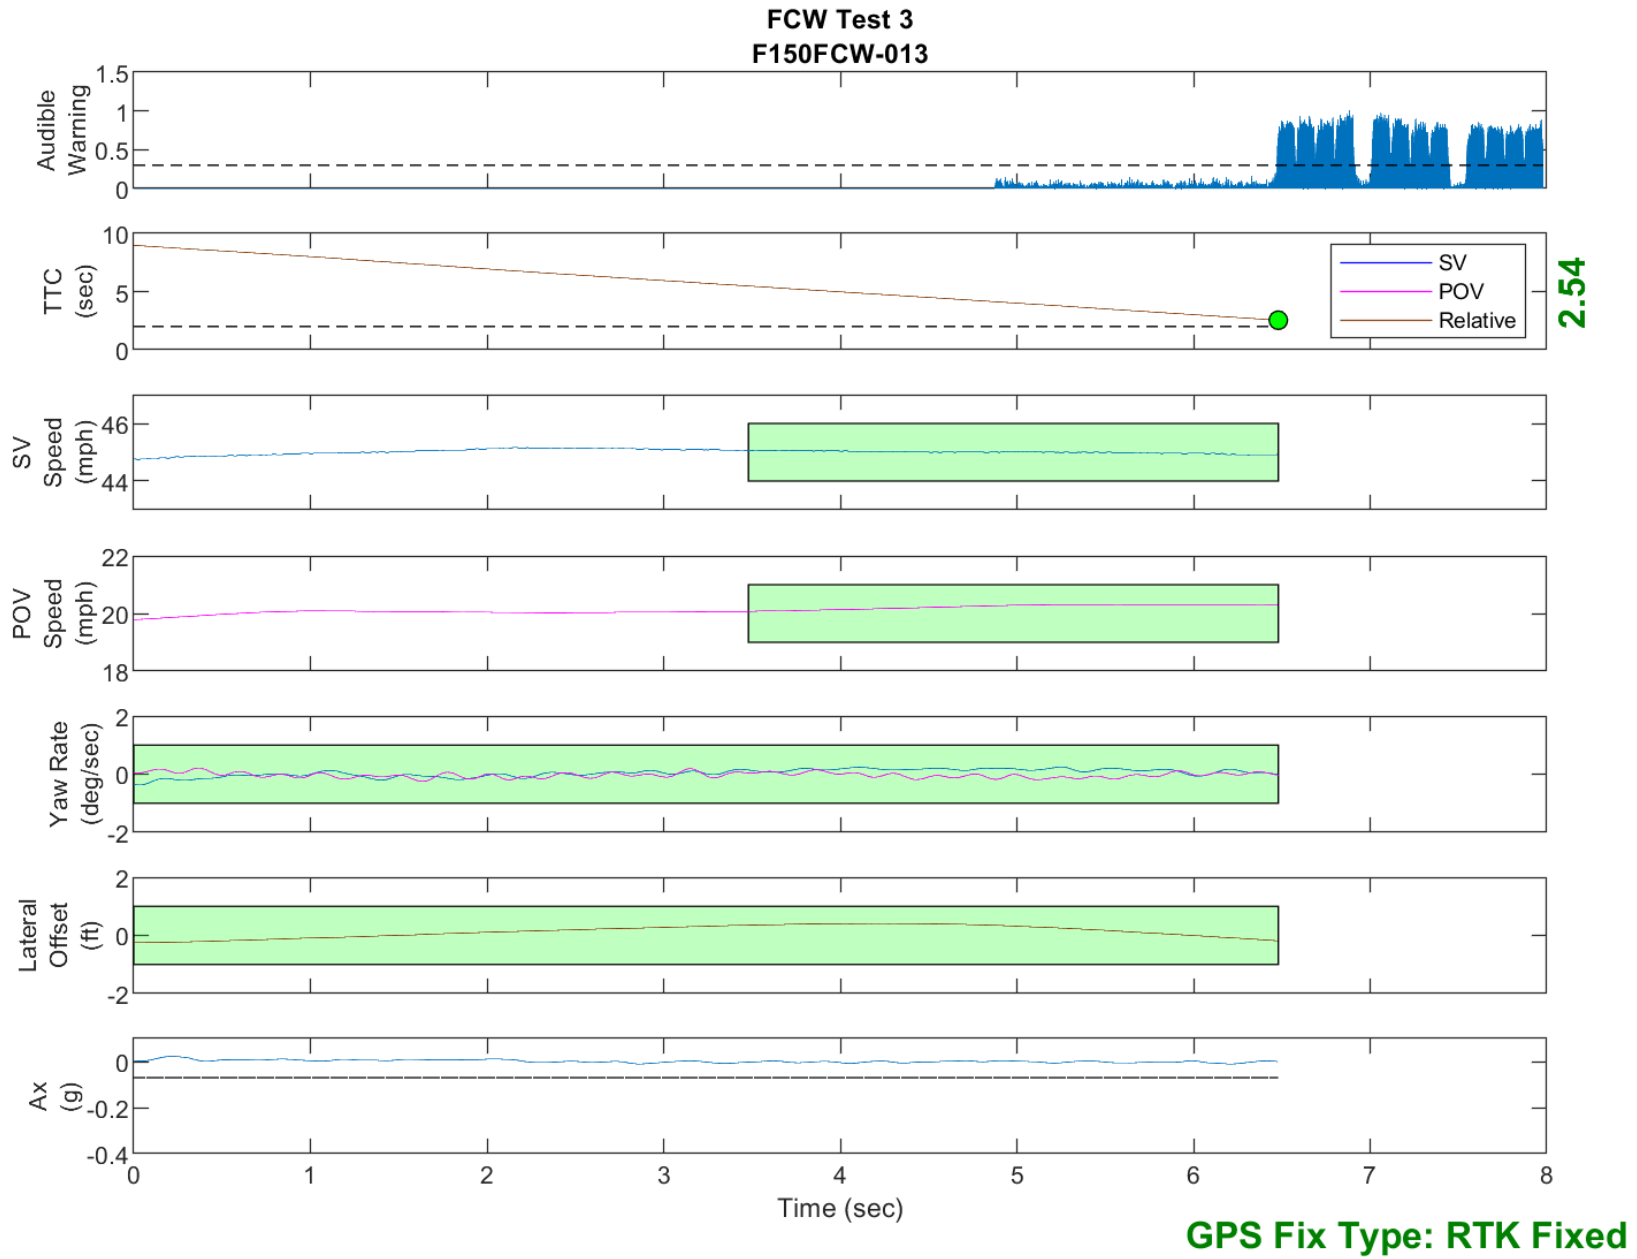


Figure D43. Time History for Run 13, FCW Test 3, Audible Warning

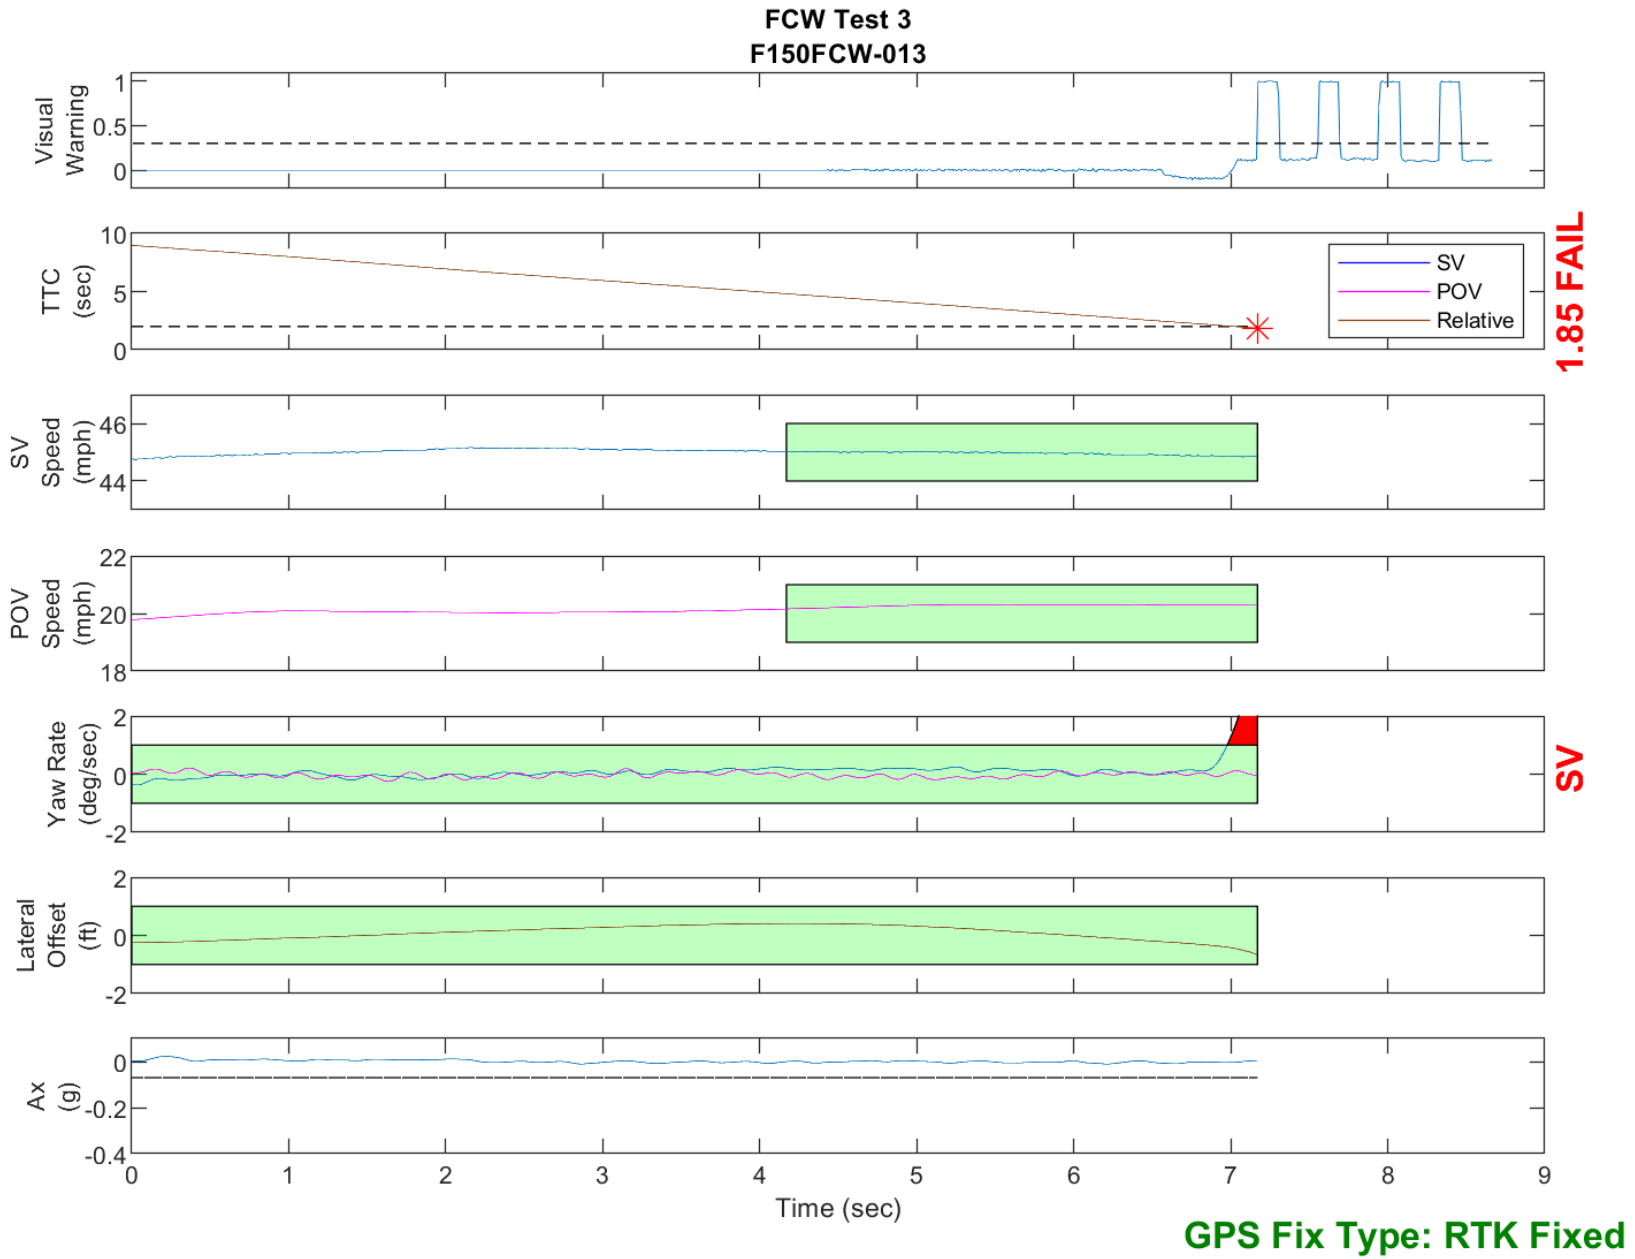


Figure D44. Time History for Run 13, FCW Test 3, Visual Warning

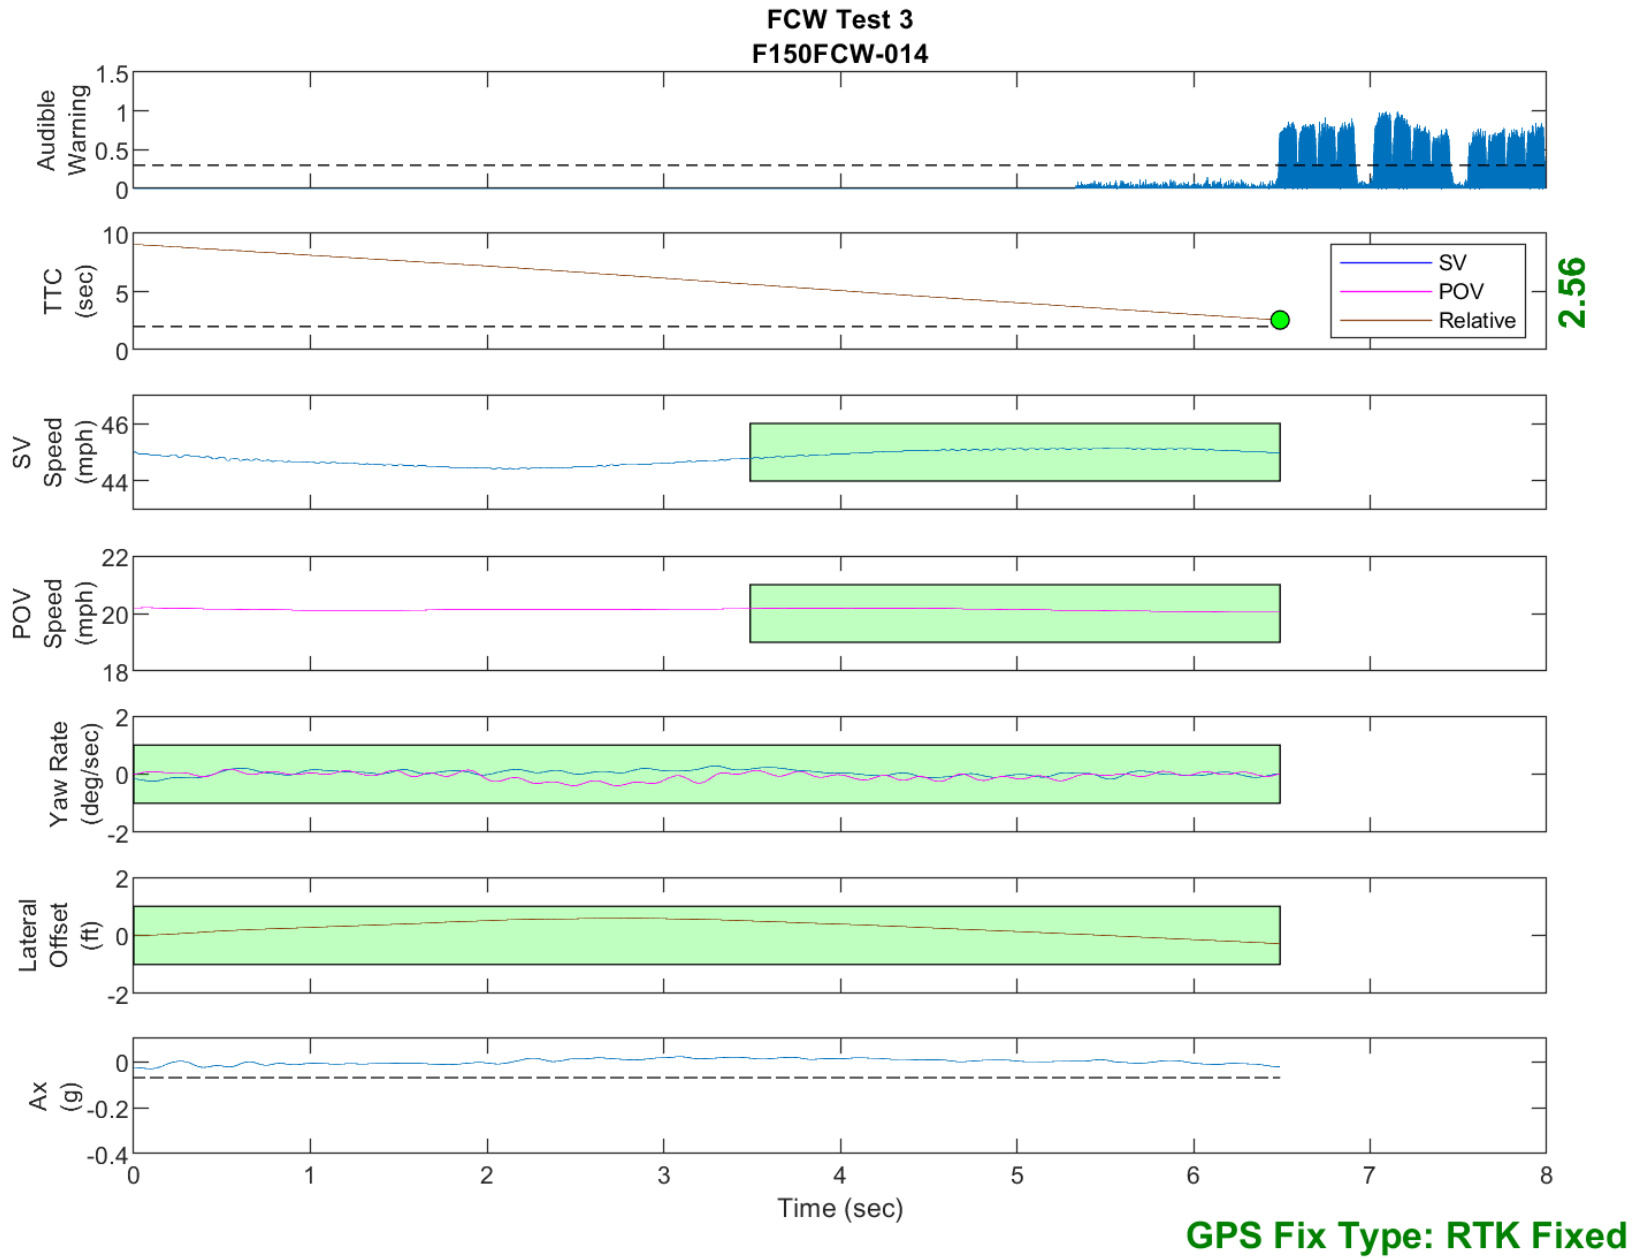


Figure D45. Time History for Run 14, FCW Test 3, Audible Warning

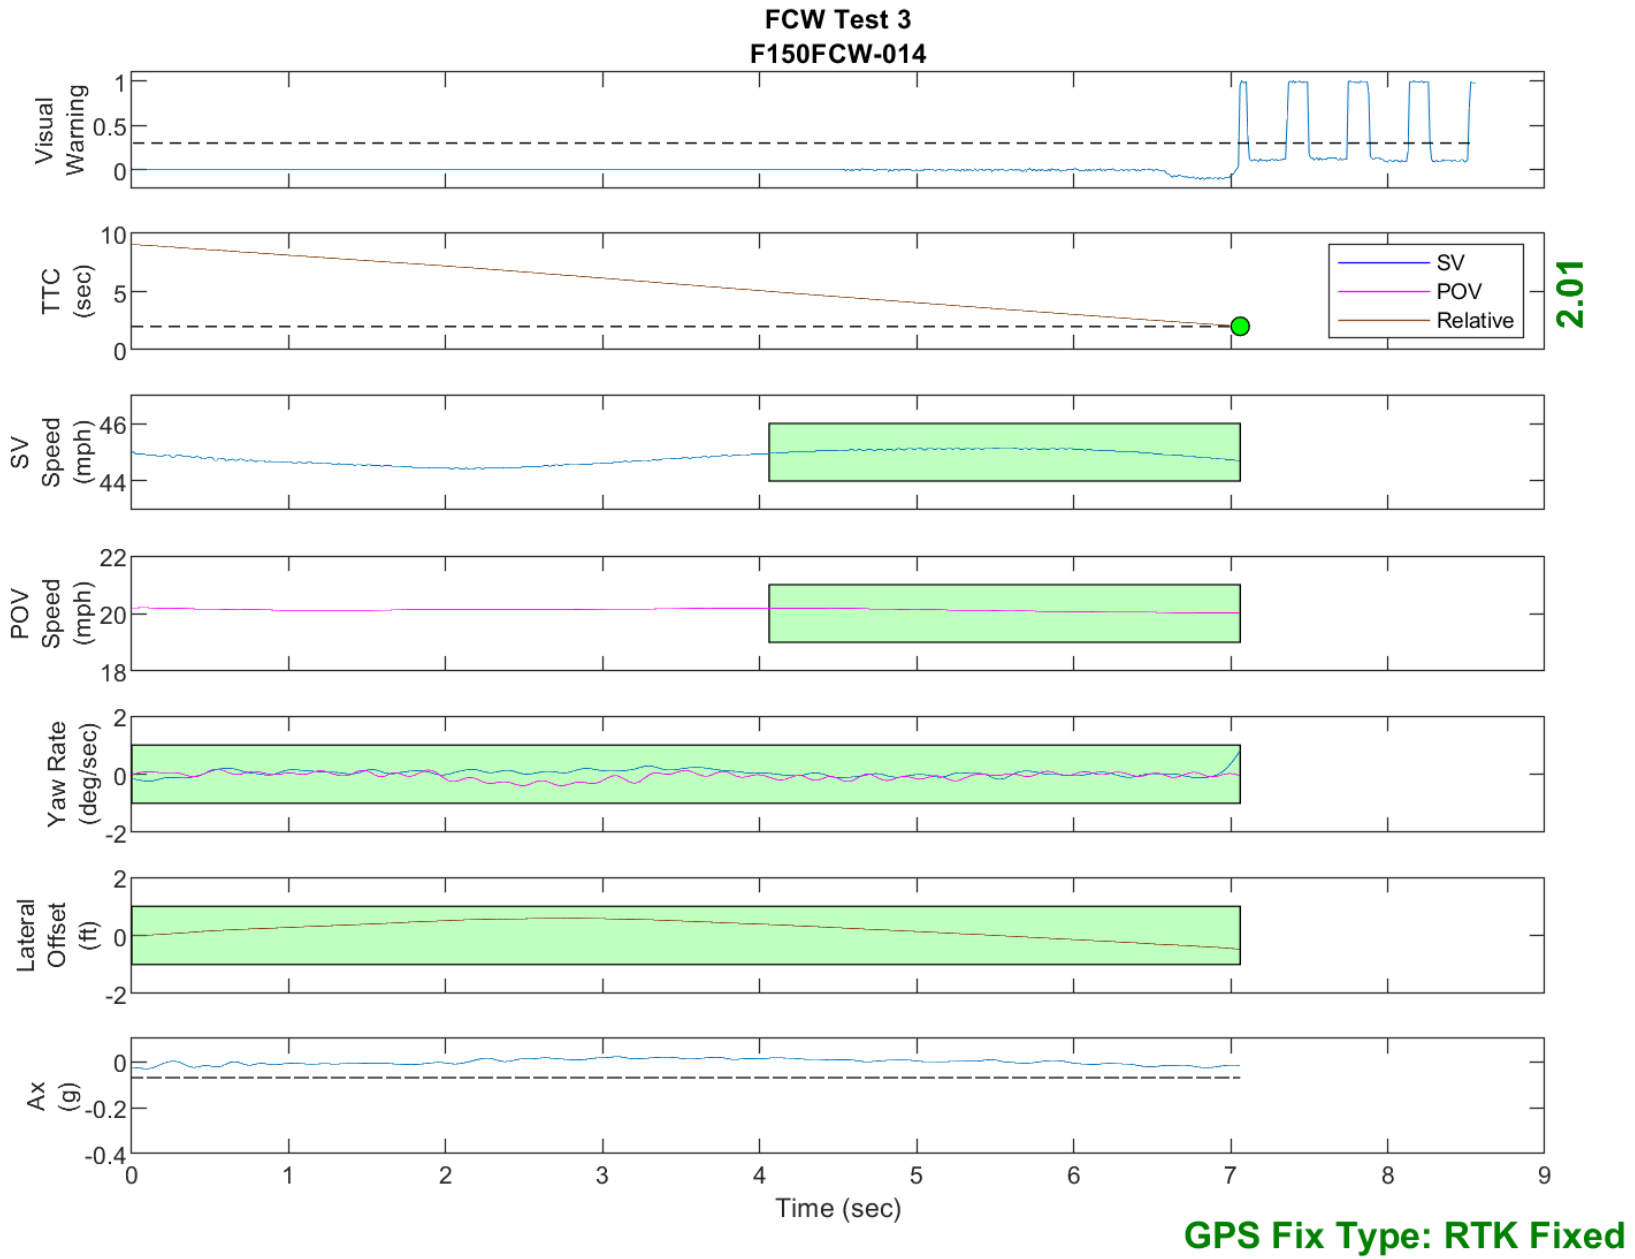


Figure D46. Time History for Run 14, FCW Test 3, Visual Warning

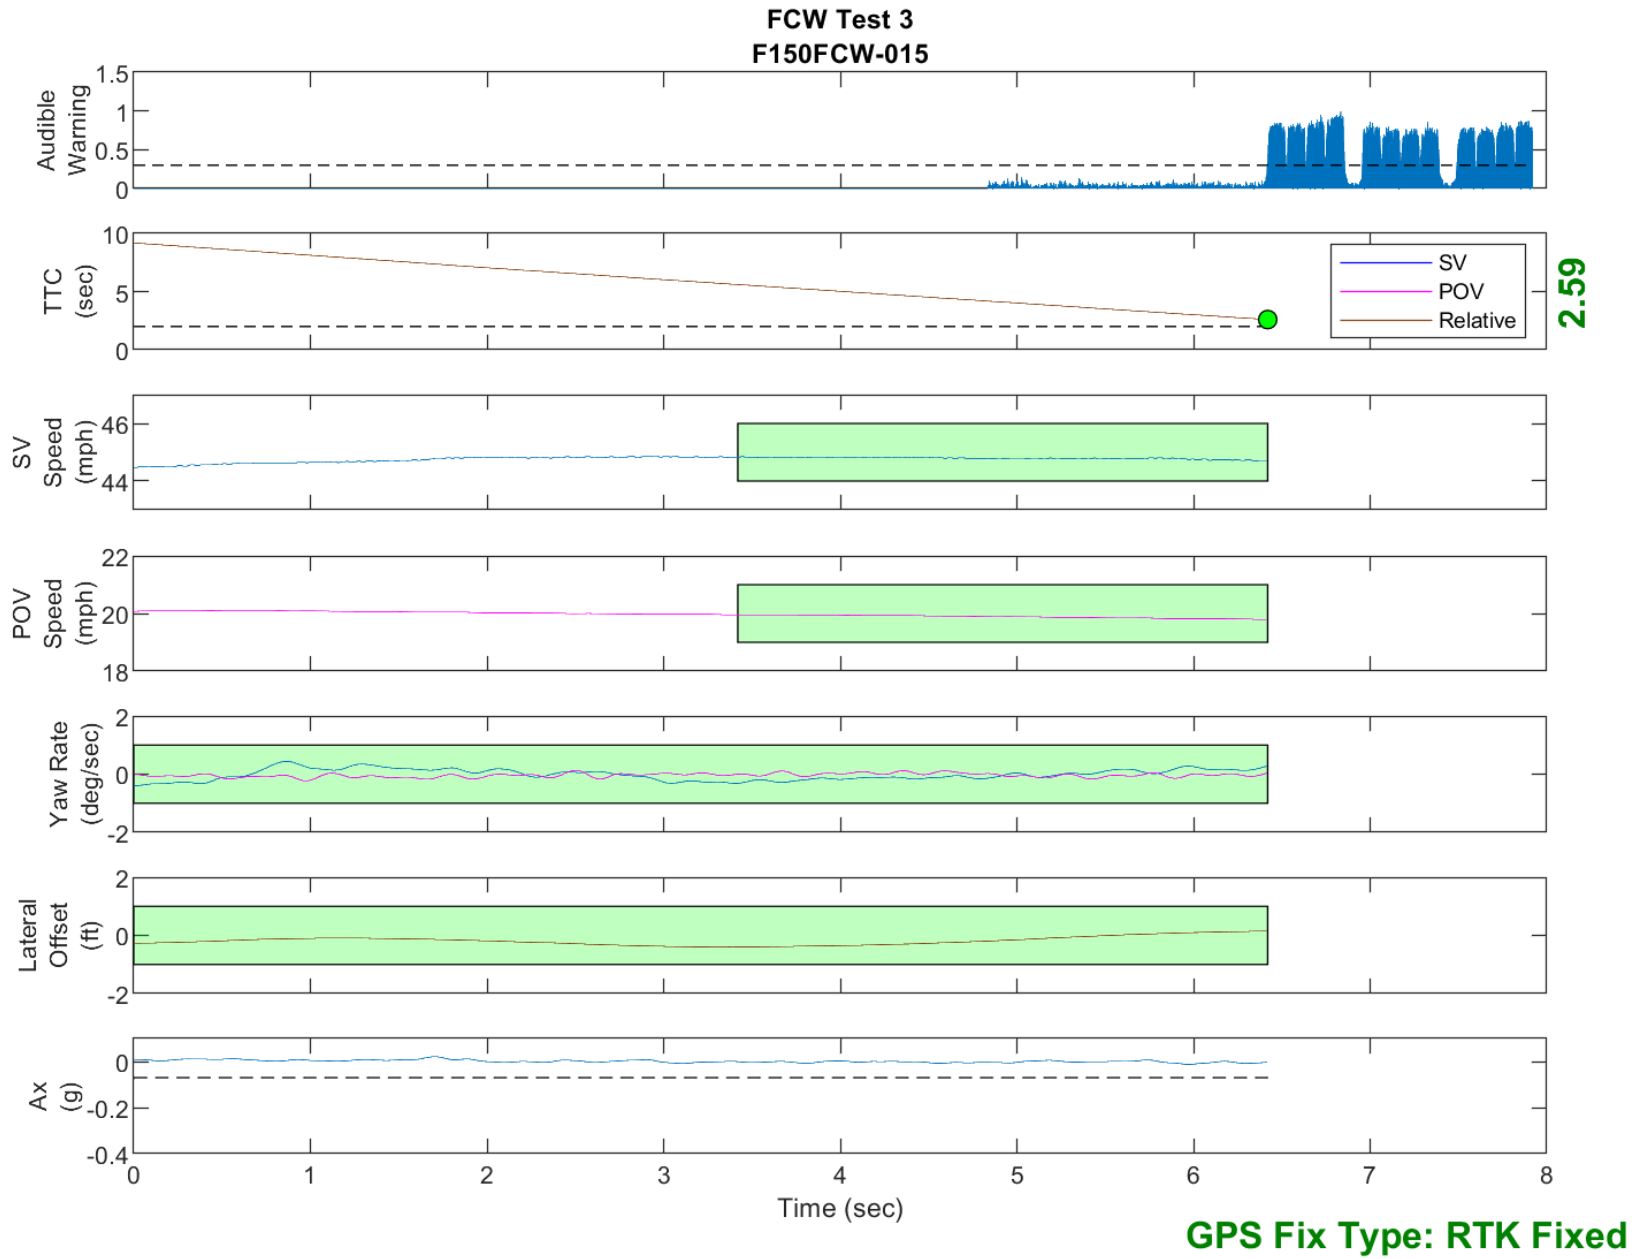


Figure D47. Time History for Run 15, FCW Test 3, Audible Warning

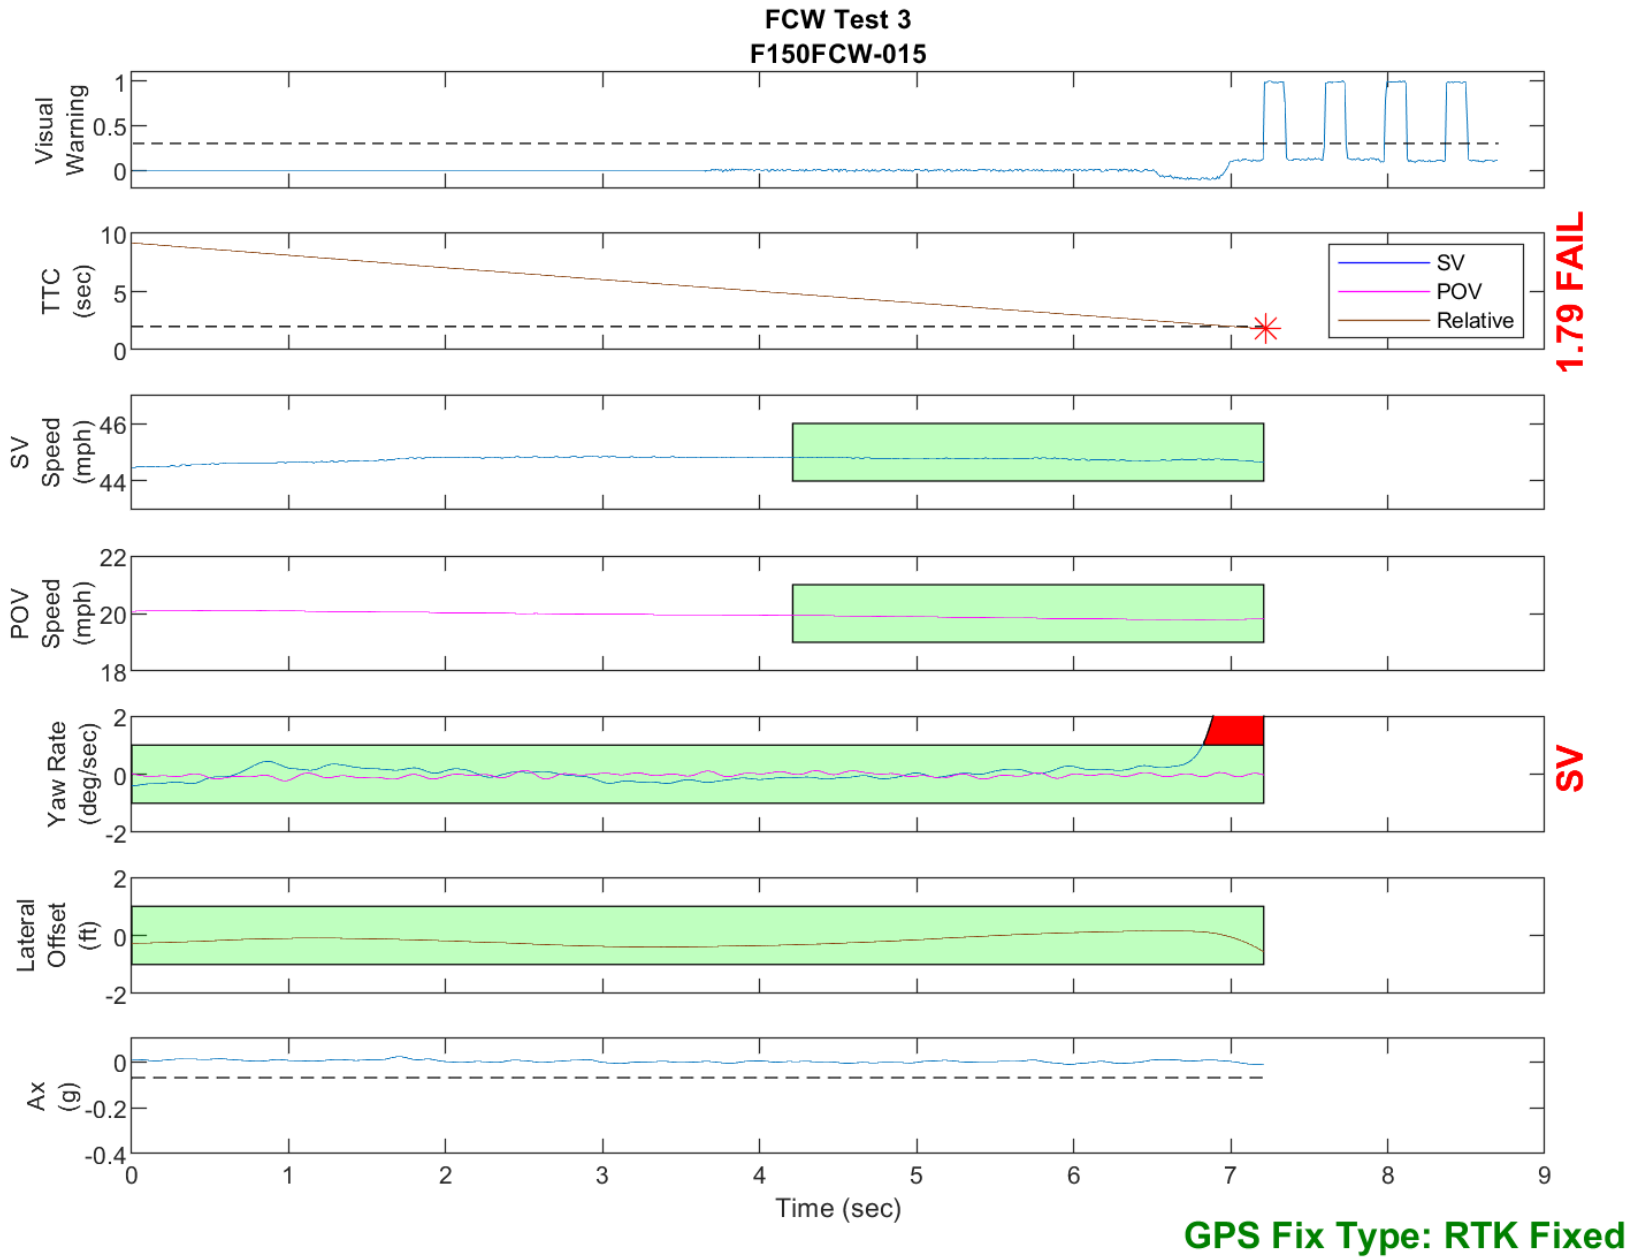


Figure D48. Time History for Run 15, FCW Test 3, Visual Warning