

**NEW CAR ASSESSMENT PROGRAM  
DYNAMIC BRAKE SUPPORT SYSTEM CONFIRMATION TEST  
NCAP-DRI-DBS-20-11**

**2020 Mazda Mazda6 Sport**

**DYNAMIC RESEARCH, INC.**

355 Van Ness Avenue  
Torrance, California 90501



**30 June 2020**

**Final Report**

**Prepared Under Contract No. DTNH22-14-D-00333**

**U.S. DEPARTMENT OF TRANSPORTATION  
National Highway Traffic Safety Administration  
New Car Assessment Program  
1200 New Jersey Avenue, SE  
West Building, 4th Floor (NRM-110)  
Washington, DC 20590**

Prepared for the Department of Transportation, National Highway Traffic Safety Administration, under Contract No. DTNH22-14-D-00333.

This publication is distributed by the U.S. Department of Transportation, National Highway Traffic Safety Administration, in the interest of information exchange. The opinions, findings, and conclusions expressed in this publication are those of the author(s) and not necessarily those of the Department of Transportation or the National Highway Traffic Safety Administration. The United States Government assumes no liability for its contents or use thereof. If trade or manufacturer's names or products are mentioned, it is only because they are considered essential to the object of the publication and should not be construed as an endorsement. The United States Government does not endorse products of manufacturers.

Prepared By: J. Lenkeit and N. Wong  
Technical Director Test Engineer  
Date: 30 June 2020

1. Report No. NCAP-DRI-DBS-20-11	2. Government Accession No.	3. Recipient's Catalog No.	
4. Title and Subtitle Final Report of Dynamic Brake Support System Confirmation Test of a 2020 Mazda Mazda6 Sport.		5. Report Date 30 June 2020	6. Performing Organization Code DRI
		8. Performing Organization Report No. DRI-TM-19-164	
7. Author(s) J. Lenkeit, Technical Director N. Wong, Test Engineer		10. Work Unit No.	
9. Performing Organization Name and Address Dynamic Research, Inc. 355 Van Ness Ave, STE 200 Torrance, CA 90501		11. Contract or Grant No. DTNH22-14-D-00333	
		13. Type of Report and Period Covered Final Test Report April - June 2020	
12. Sponsoring Agency Name and Address U.S. Department of Transportation National Highway Traffic Safety Administration New Car Assessment Program 1200 New Jersey Avenue, SE, West Building, 4th Floor (NRM-110) Washington, DC 20590		14. Sponsoring Agency Code NRM-110	
		15. Supplementary Notes	
16. Abstract These tests were conducted on the subject 2020 Mazda Mazda6 Sport in accordance with the specifications of the New Car Assessment Program's (NCAP) most current Test Procedure in docket NHTSA-2015-0006-0026; DYNAMIC BRAKE SUPPORT PERFORMANCE EVALUATION CONFIRMATION TEST FOR THE NEW CAR ASSESSMENT PROGRAM, October 2015. The vehicle passed the requirements of the test for all four DBS test scenarios.			
17. Key Words Dynamic Brake Support, DBS, AEB, New Car Assessment Program, NCAP		18. Distribution Statement Copies of this report are available from the following: NHTSA Technical Reference Division National Highway Traffic Safety Administration 1200 New Jersey Avenue, SE Washington, DC 20590	
19. Security Classif. (of this report) Unclassified	20. Security Classif. (of this page) Unclassified	21. No. of Pages 155	22. Price

## TABLE OF CONTENTS

<u>SECTION</u>	<u>PAGE</u>
I. INTRODUCTION .....	1
II. DATA SHEETS .....	2
Data Sheet 1: Test Results Summary .....	3
Data Sheet 2: Vehicle Data .....	4
Data Sheet 3: Test Conditions .....	5
Data Sheet 4: Dynamic Brake System Operation .....	7
III. TEST PROCEDURES .....	10
A. Test Procedure Overview .....	10
B. General Information .....	15
C. Principal Other Vehicle .....	18
D. Foundation Brake System Characterization .....	19
E. Brake Control .....	20
F. Instrumentation .....	21
APPENDIX A Photographs .....	A-1
APPENDIX B Excerpts from Owner's Manual .....	B-1
APPENDIX C Run Logs .....	C-1
APPENDIX D Brake Characterization .....	D-1
APPENDIX E Time Histories .....	E-1

## Section I

### INTRODUCTION

Dynamic Brake Support (DBS) systems are a subset of Automatic Emergency Braking (AEB) systems. DBS systems are designed to avoid or mitigate consequences of rear-end crashes by automatically applying supplemental braking on the subject vehicle when the system determines that the braking applied by the driver is insufficient to avoid a collision.

DBS systems intervene in driving situations where a rear-end collision is expected to be unavoidable unless additional braking is realized. Since DBS interventions are designed to occur late in the pre-crash timeline, and the driver has already initiated crash-avoidance braking, DBS systems are not required to alert the driver that a DBS intervention has occurred. In addition to sensors monitoring vehicle operating conditions, such as speed, brake application, etc., DBS systems employ RADAR, LIDAR, and/or vision-based sensors capable of detecting surrounding vehicles in traffic. Algorithms in the system's Central Processing Unit (CPU) use this information to continuously monitor the likelihood of a rear-end crash, and command additional braking as needed to avoid or mitigate such a crash.

The method prescribed by the National Highway Traffic Safety Administration (NHTSA) to evaluate DBS performance on the test track involves three longitudinal, rear-end type crash configurations and a false positive test. In the rear-end scenarios, a subject vehicle (SV) approaches a stopped, slower-moving, or decelerating principal other vehicle (POV) in the same lane of travel. For these tests, the POV is a strikeable object with the characteristics of a compact passenger car. The fourth scenario is used to evaluate the propensity of a DBS system to inappropriately activate in a non-critical driving scenario that does not present a safety risk to the SV occupant(s).

The purpose of the testing reported herein was to objectively quantify the performance of a Dynamic Brake Support system installed on a 2020 Mazda Mazda6 Sport. This test to assess Dynamic Brake Support systems is sponsored by the National Highway Traffic Safety Administration under Contract No. DTNH22-14-D-00333 with the New Car Assessment Program (NCAP).

Section II  
**DATA SHEETS**

**DYNAMIC BRAKE SUPPORT**  
**DATA SHEET 1: TEST RESULTS SUMMARY**

(Page 1 of 1)

**2020 Mazda Mazda6 Sport**

---

VIN: JM1GL1UM1L151xxxx

Test Date: 4/14/2020

Dynamic Brake Support System setting: Far

**Test 1 - Subject Vehicle Encounters  
Stopped Principal Other Vehicle**

SV 25 mph: Pass

**Test 2 - Subject Vehicle Encounters  
Slower Principal Other Vehicle**

SV 25 mph POV 10 mph: Pass

SV 45 mph POV 20 mph: Pass

**Test 3 - Subject Vehicle Encounters  
Decelerating Principal Other Vehicle**

SV 35 mph POV 35 mph: Pass

**Test 4 - Subject Vehicle Encounters  
Steel Trench Plate**

SV 25 mph: Pass

SV 45 mph: Pass

**Overall: Pass**

Notes:

**DYNAMIC BRAKE SUPPORT**  
**DATA SHEET 2: VEHICLE DATA**

(Page 1 of 1)

**2020 Mazda Mazda6 Sport**

---

**TEST VEHICLE INFORMATION**

VIN: JM1GL1UM1L151xxxx

Body Style: Sedan

Color: Machine Grey Metallic

Date Received: 4/6/2020

Odometer Reading: 5 mi

**DATA FROM VEHICLE'S CERTIFICATON LABEL**

Vehicle manufactured by: MAZDA MOTOR CORPORATION

Date of manufacture: 10/19

Vehicle Type: Passenger Car

**DATA FROM TIRE PLACARD**

Tires size as stated on Tire Placard: Front: P225/55 R17

Rear: P225/55 R17

Recommended cold tire pressure: Front: 250 kPa (36 psi)

Rear: 250 kPa (36 psi)

**TIRES**

Tire manufacturer and model: Yokohama Advan A83

Front tire specification: P225/55 R17 95V

Rear tire specification: P225/55 R17 95V

Front tire DOT prefix: FDUPV24

Rear tire DOT prefix: FDUPV24



**DYNAMIC BRAKE SUPPORT**  
**DATA SHEET 3: TEST CONDITIONS**

(Page 1 of 2)

**2020 Mazda Mazda6 Sport**

---

**GENERAL INFORMATION**

Test date: 4/14/2020

**AMBIENT CONDITIONS**

Air temperature: 23.3 C (74 F)

Wind speed: 2.1 m/s (4.6 mph)

- Wind speed  $\leq$  10 m/s (22 mph).
- Tests were not performed during periods of inclement weather. This includes, but is not limited to, rain, snow, hail, fog, smoke, or ash.
- Tests were conducted during daylight hours with good atmospheric visibility (defined as an absence of fog and the ability to see clearly for more than 5000 meters). The tests were not conducted with the vehicle oriented into the sun during very low sun angle conditions, where the sun is oriented 15 degrees or less from horizontal, and camera "washout" or system inoperability results.

**VEHICLE PREPARATION**

**Verify the following:**

All non-consumable fluids at 100% capacity:   X  

Fuel tank is full:   X  

Tire pressures are set to manufacturer's  
recommended cold tire pressure:   X  

Front: 250 kPa (36 psi)

Rear: 250 kPa (36 psi)

**DYNAMIC BRAKE SUPPORT**  
**DATA SHEET 3: TEST CONDITIONS**

(Page 2 of 2)

**2020 Mazda Mazda6 Sport**

---

**WEIGHT**

Weight of vehicle as tested including driver and instrumentation

Left Front: 490.3 kg (1081 lb)

Right Front: 470.4 kg (1037 lb)

Left Rear: 350.6 kg (773 lb)

Right Rear: 332.9 kg (734 lb)

Total: 1644.3 kg (3625 lb)

**DYNAMIC BRAKE SUPPORT**  
**DATA SHEET 4: DYNAMIC BRAKE SUPPORT SYSTEM OPERATION**

(Page 1 of 3)

**2020 Mazda Mazda6 Sport**

---

Name of the DBS option, option package, etc.:

Smart Brake Support (SBS)

Type and location of sensor(s) the system uses:

Radar and mono camera.

The Forward Sensing Camera (FSC) is installed at the top of the windshield near the rearview mirror.

The radar sensor (front) is mounted behind the radiator grille.

System setting used for test (if applicable): Far

Brake application mode used for test: Constant pedal displacement

What is the minimum vehicle speed at which the DBS system becomes active?

16 km/h (10 mph) (Per manufacturer supplied information)

What is the maximum vehicle speed at which the DBS system functions?

None stated. (Per manufacturer supplied information)

Does the vehicle system require an initialization sequence/procedure?  Yes

No

If yes, please provide a full description.

Drive more than 4 km (2.5 mile) of straight road with lane markings on both sides at a speed between 25 and 30 mph. Does not have to be continuous, can start and turn around.

Will the system deactivate due to repeated AEB activations, impacts or near-misses?  Yes

No

**DYNAMIC BRAKE SUPPORT**  
**DATA SHEET 4: DYNAMIC BRAKE SUPPORT SYSTEM OPERATION**

(Page 2 of 3)

**2020 Mazda Mazda6 Sport**

---

If yes, please provide a full description.

Deactivation can be avoided by cycling the ignition after each AEB activation.

How is the Forward Collision Warning presented to the driver?  Warning light  
(Check all that apply)  Buzzer or audible alarm  
 Vibration  
 Other \_\_\_\_\_

Describe the method by which the driver is alerted. For example, if the warning is a light, where is it located, its color, size, words or symbol, does it flash on and off, etc. If it is a sound, describe if it is a constant beep or a repeated beep. If it is a vibration, describe where it is felt (e.g., pedals, steering wheel), the dominant frequency (and possibly magnitude), the type of warning (light, audible, vibration, or combination), etc.

Visual warning, located in the instrument cluster: Symbol & Word, Red color, Flashes on/off. See Appendix A, Figure A16.

Audible warning: Repeated Beep, High Pitch

Is there a way to deactivate the system?  Yes  
 No

If yes, please provide a full description including the switch location and method of operation, any associated instrument panel indicator, etc.

A touchscreen located in the center of the dash panel provides an interface to the settings (Appendix A, Figure A16). The hierarchy is:

Settings

Safety - Select SBS/SCBS

System - Select on or off (check or uncheck)

When the SBS system is turned off, the SBS OFF indicator light turns on. When the engine is restarted, the system becomes operational.

**DYNAMIC BRAKE SUPPORT**

**DATA SHEET 4: DYNAMIC BRAKE SUPPORT SYSTEM OPERATION**

(Page 3 of 3)

**2020 Mazda Mazda6 Sport**

---

Is the vehicle equipped with a control whose purpose is to adjust the range setting or otherwise influence the operation of DBS?  Yes  
 No

If yes, please provide a full description.

A touchscreen located in the center of the dash panel provides an interface to the settings (Appendix A, Figure A16). The hierarchy is:

Settings

Safety - Select SBS/SCBS

Warning Distance- Select Far, Med., Near

Warning Volume- Select High, Low, Off

Are there other driving modes or conditions that render DBS inoperable or reduce its effectiveness?  Yes  
 No

If yes, please provide a full description.

System limitations are described in the Owner's Manual, Pages 4-181 and 4-182. These pages are reproduced in Appendix B, Pages B-9 and B-10.

Notes:

## Section III

### TEST PROCEDURES

#### A. Test Procedure Overview

Four test scenarios were used, as follows:

Test 1. Subject Vehicle (SV) Encounters Stopped Principal Other Vehicle (POV)

Test 2. Subject Vehicle Encounters Slower Principal Other Vehicle

Test 3. Subject Vehicle Encounters Decelerating Principal Other Vehicle

Test 4. Subject Vehicle Encounters Steel Trench Plate

An overview of each of the test procedures follows.

#### 1. TEST 1 – SUBJECT VEHICLE ENCOUNTERS STOPPED PRINCIPAL OTHER VEHICLE ON A STRAIGHT ROAD

This test evaluates the ability of the DBS system to detect and respond to a stopped lead vehicle in the immediate forward path of the SV, as depicted in Figure 1.

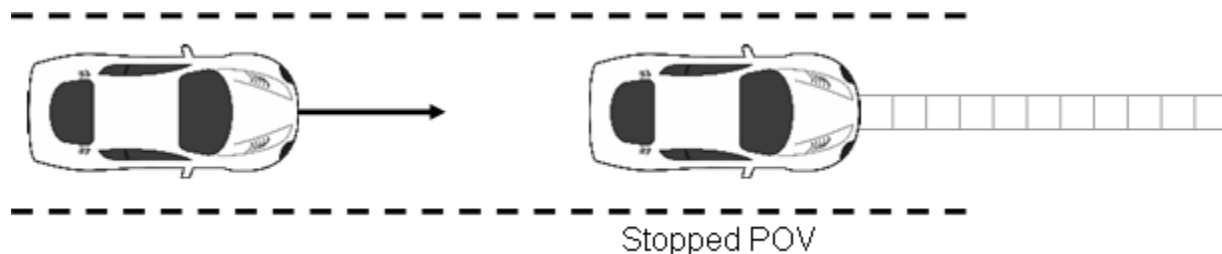


Figure 1. Depiction of Test 1

##### a. Procedure

The POV was parked in the center of a travel lane, with its longitudinal axis oriented parallel to the roadway edge and facing the same direction as the SV so that the SV approaches the rear of the POV.

The SV ignition was cycled prior to each test run. The SV was driven at a nominal speed of 25 mph (40.2 km/h) in the center of the lane of travel, toward the parked POV. The SV throttle pedal was released within 500 ms after  $t_{FCW}$ , i.e., within 500 ms of the FCW alert. The SV brakes were applied at  $TTC = 1.1$  seconds (SV-to-POV distance of 40 ft (12 m)). The test concluded when either:

- The SV came into contact with the POV or

- The SV came to a stop before making contact with the POV.

In addition to the general test validity criteria described below, for an individual test trial to be valid, the following was required throughout the test:

- The SV speed could not deviate from the nominal speed by more than 1.0 mph (1.6 km/h) during an interval defined by a Time to Collision (TTC) = 5.1 seconds to  $t_{FCW}$ . For this test, TTC = 5.1 seconds is taken to occur at an SV-to-POV distance of 187 ft (57 m).

**Table 1. Nominal Stopped POV DBS Test Choreography**

Test Speeds		SV Speed Held Constant		SV Throttle Fully Released By		SV Brake Application Onset (for each application magnitude)	
SV	POV	TTC (seconds)	SV-to-POV Headway	TTC (seconds)	SV-to-POV Headway	TTC (seconds)	SV-to-POV Headway
25 mph (40.2 km/h)	0	5.1 → $t_{FCW}$	187 ft (57 m) → $t_{FCW}$	Within 500 ms of FCW1 onset	Varies	1.1	40 ft (12 m)

b. Criteria

The performance requirement for this series of tests is that there be no SV-POV impact for at least five of the seven valid test trials.

**2. TEST 2 – SUBJECT VEHICLE ENCOUNTERS SLOWER PRINCIPAL OTHER VEHICLE**

This test evaluates the ability of the DBS system to detect and respond to a slower-moving lead vehicle traveling at a constant speed in the immediate forward path of the SV, as depicted in Figure 2.

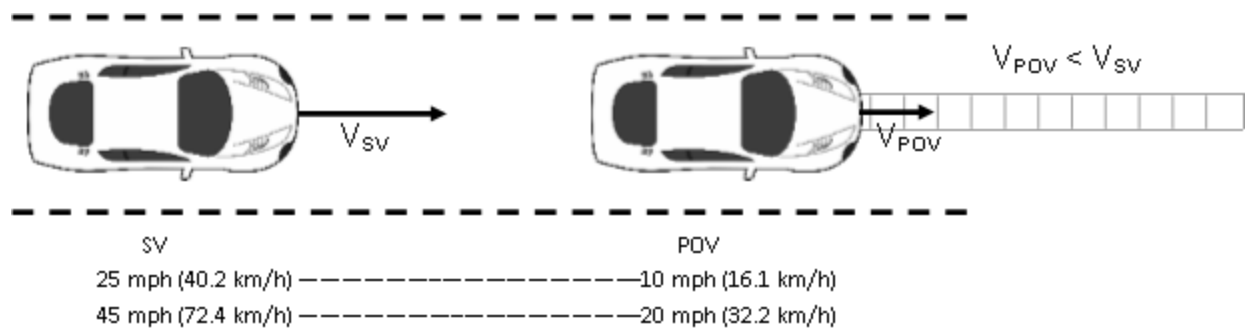


Figure 2. Depiction of Test 2

a. Procedure

The SV ignition was cycled prior to each test run. The tests were conducted two ways. In the first, the POV was driven at a constant 10.0 mph (16.1 km/h) in the center of the lane of travel while the SV was driven at 25.0 mph (40.2 km/h), in the center lane of travel, toward the slower-moving POV. In the second, the POV was driven at a constant 20.0 mph (32.2 km/h) in the center of the lane of travel while the SV was driven at 45.0 mph (72.4 km/h), in the center lane of travel, toward the slower-moving POV. In both cases, the SV throttle pedal was released within 500 ms after  $t_{FCW}$ , i.e., within 500 ms of the FCW alert. The SV brakes were applied at  $TTC = 1.0$  seconds, assumed to be SV-to-POV distance of 22 ft (7 m) for an SV speed of 25 mph and 37 ft (11 m) for an SV speed of 45 mph.

The test concluded when either:

- The SV came into contact with the POV or
- 1 second after the speed of the SV became less than or equal to that of the POV.

The SV driver then braked to a stop.

In addition to the general test validity criteria described below, for an individual test trial to be valid, the following was required throughout the test:

- The lateral distance between the centerline of the POV and the center of the travel lane could not deviate more than  $\pm 1$  ft (0.3 m) during the validity period.
- The SV speed could not deviate more than  $\pm 1.0$  mph ( $\pm 1.6$  km/h) during an interval defined by  $TTC = 5.0$  seconds to  $t_{FCW}$ .
- The POV speed could not deviate more than  $\pm 1.0$  mph ( $\pm 1.6$  km/h) during the validity period.

**Table 2. Nominal Slower-Moving POV DBS Test Choreography**

Test Speeds		SV Speed Held Constant		SV Throttle Fully Released By		SV Brake Application Onset (for each application magnitude)	
SV	POV	TTC (seconds)	SV-to-POV Headway	TTC (seconds)	SV-to-POV Headway	TTC (seconds)	SV-to-POV Headway
25 mph (40 km/h)	10 mph (16 km/h)	5.0 $\rightarrow$ $t_{FCW}$	110 ft (34 m) $\rightarrow$ $t_{FCW}$	Within 500 ms of FCW1 onset	Varies	1.0	22 ft (7 m)
45 mph (72 km/h)	20 mph (32 km/h)	5.0 $\rightarrow$ $t_{FCW}$	183 ft (56 m) $\rightarrow$ $t_{FCW}$	Within 500 ms of FCW1 onset	Varies	1.0	37 ft (11 m)



b. Criteria

The performance requirement for this series of tests is that there be no SV-POV impact for at least five of the seven valid test trials.

3. TEST 3 – SUBJECT VEHICLE ENCOUNTERS DECELERATING PRINCIPAL OTHER VEHICLE

This test evaluates the ability of the DBS system to detect and respond to a lead vehicle slowing with a constant deceleration in the immediate forward path of the SV as depicted in Figure 3. Should the SV foundation brake system be unable to prevent an SV-to-POV impact for a given test condition, the DBS system should automatically provide supplementary braking capable of preventing an SV-to-POV collision.

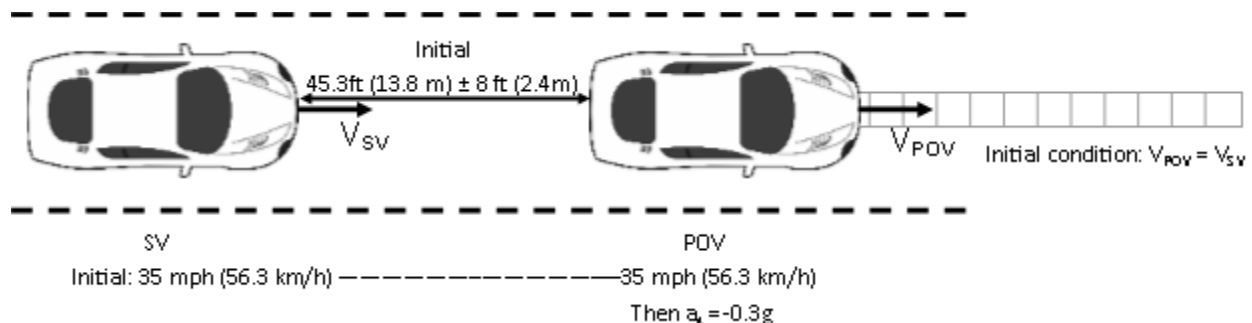


Figure 3. Depiction of Test 3 with POV Decelerating

a. Procedure

The SV ignition was cycled prior to each test run. For this scenario both the POV and SV were driven at a constant 35.0 mph (56.3 km/h) in the center of the lane, with headway of 45.3 ft (13.8 m) ± 8 ft (2.4 m). Once these conditions were met, the POV tow vehicle brakes were applied to achieve  $0.3 \pm 0.03 g$ . The SV throttle pedal was released within 500 ms of  $t_{FCW}$ , and the SV brakes were applied when TTC was 1.4 seconds (31.5 ft (9.6 m)).

The test concluded when either:

- The SV came into contact with the POV or
- 1 second after the velocity of the SV became less than or equal to that of the POV.

The SV driver then braked to a stop.

In addition to the general test validity criteria described below, for an individual test trial to be valid, the following was required throughout the test:

- The lateral distance between the centerline of the POV and the center of the travel lane could not deviate more than  $\pm 1$  ft (0.3 m) during the validity period.
- The headway between the SV and POV must have been constant from the onset

of the applicable validity period to the onset of POV braking.

- The SV and POV speed could not deviate more than  $\pm 1.0$  mph (1.6 km/h) during an interval defined by the onset of the validity period to the onset of POV braking.
- The average POV deceleration could not deviate by more than  $\pm 0.03$  g from the nominal 0.3 g deceleration during the interval beginning at 1.5 seconds after the onset of POV braking and ending either 250 ms prior to the POV coming to a stop or the SV coming into contact with the POV.

**Table 3. Nominal Decelerating POV DBS Test Choreography**

Test Speeds		SV Speed Held Constant		SV Throttle Fully Released By		SV Brake Application Onset (for each application magnitude)	
SV	POV	TTC (seconds)	SV-to-POV Headway	TTC (seconds)	SV-to-POV Headway	TTC (seconds)	SV-to-POV Headway
35 mph (56 km/h)	35 mph (56 km/h)	3.0 seconds prior to POV braking $\rightarrow t_{FCW}$	45 ft (14 m) $\rightarrow t_{FCW}$	Within 500 ms of FCW1 onset	Varies	1.4	32 ft (10 m)

b. Criteria

The performance requirement for this series of tests is that no SV-POV contact occurs for at least five of the seven valid test trials.

4. TEST 4 – FALSE POSITIVE SUPPRESSION

The false positive suppression test series evaluates the ability of a DBS system to differentiate a steel trench plate (STP) from an object presenting a genuine safety risk to the SV. Although the STP is large and metallic, it is designed to be driven over without risk of injury to the driver or damage to the SV. Therefore, in this scenario, the automatic braking available from DBS is not necessary and should be suppressed. The test condition is nearly equivalent to that previously defined for Test 1, the stopped POV condition, but with an STP in the SV forward path in lieu of a POV.

a. Procedure

This test was conducted at two speeds, 25 mph (40.2 km/h) and 45 mph (72.4 km/h). The SV was driven directly towards, and over, the STP, which was positioned in the center of a travel lane, with its longest sides parallel to the road edge. The SV was driven at constant speed in the center of the lane toward the STP. If the SV did not present an FCW alert during the approach to the STP by  $TTC = 2.1$  s, the SV driver initiated release of the throttle pedal at  $TTC = 2.1$  s and the throttle pedal was fully released within 500 ms

of TTC = 2.1 s. The SV brakes were applied at TTC of 1.1 seconds, assumed to be 40 ft (12.3 m) from the edge of the STP at 25 mph or 73 ft (22.1 m) at 45 mph. The test concluded when the front most part of the SV reached a vertical plane defined by the edge of the STP first encountered by the SV.

b. Criteria

In order to pass the False Positive test series, the magnitude of the SV deceleration reduction attributable to DBS intervention must have been less than or equal to 1.25 times the average of the deceleration experienced by the baseline command from the braking actuator for at least five of seven valid test trials.

**B. General Information**

1.  $T_{FCW}$

The time at which the Forward Collision Warning (FCW) activation flag indicates that the system has issued an alert to the SV driver is designated as  $t_{FCW}$ . FCW alerts are typically haptic, visual, or audible, and the onset of the alert is determined by post-processing the test data.

For systems that implement audible or haptic alerts, part of the pre-test instrumentation verification process is to determine the tonal frequency of the audible warning or the vibration frequency of the tactile warning through use of the PSD (Power Spectral Density) function in Matlab. This is accomplished in order to identify the center frequency around which a band-pass filter is applied to subsequent audible or tactile warning data so that the beginning of such warnings can be programmatically determined. The band-pass filter used for these warning signal types is a phaseless, forward-reverse pass, elliptical (Cauer) digital filter, with filter parameters as listed in Table 4.

**Table 4. Audible and Tactile Warning Filter Parameters**

<b>Warning Type</b>	<b>Filter Order</b>	<b>Peak-to-Peak Ripple</b>	<b>Minimum Stop Band Attenuation</b>	<b>Passband Frequency Range</b>
Audible	5 <sup>th</sup>	3 dB	60 dB	Identified Center Frequency $\pm$ 5%
Tactile	5 <sup>th</sup>	3 dB	60 dB	Identified Center Frequency $\pm$ 20%

## 2. GENERAL VALIDITY CRITERIA

In addition to any validity criteria described above for the individual test scenarios, for an individual trial to be valid, it must have met the following criteria throughout the test:

- The SV driver seatbelt was latched.
- If any load had been placed on the SV front passenger seat (e.g., for instrumentation), the vehicle's front passenger seatbelt was latched.
- The SV was driven at the nominal speed in the center of the travel lane, toward the POV or STP.
- The driver used the least amount of steering input necessary to maintain SV position in the center of the travel lane during the validity period; use of abrupt steering inputs or corrections was avoided.
- The yaw rate of the SV did not exceed  $\pm 1.0$  deg/s from the onset of the validity period to the instant SV deceleration exceeded 0.25 g.
- The SV driver did not apply any force to the brake pedal during the applicable validity period. All braking shall be performed by the programmable brake controller.
- The lateral distance between the centerline of the SV and the centerline of the POV or STP did not deviate more than  $\pm 1$  ft (0.3 m) during the applicable validity period.

### 3. VALIDITY PERIOD

The valid test interval began:

- Test 1: When the SV-to-POV TTC = 5.1 seconds
- Test 2: When the SV-to-POV TTC = 5.0 seconds
- Test 3: 3 seconds before the onset of POV braking
- Test 4: 2 seconds prior to the SV throttle pedal being released

The valid test interval ended:

- Test 1: When either of the following occurred:
  - The SV came in contact with the POV (SV-to-POV contact was assessed by using GPS-based range data or by measurement of direct contact sensor output); or
  - The SV came to a stop before making contact with the POV.
- Test 2: When either of the following occurred:
  - The SV came into contact with the POV; or
  - 1 second after the velocity of the SV became less than or equal to that of the POV.
- Test 3: When either of the following occurred:
  - The SV came in contact with the POV; or
  - 1 second after minimum SV-to-POV range occurred.
- Test 4: When the SV stopped.

### 4. STATIC INSTRUMENTATION CALIBRATION

To assist in resolving uncertain test data, static calibration data was collected prior to each of the test series.

For Tests 1, 2, and 3, the SV, POV, and POV moving platform and tow vehicle were centered in the same travel lane with the same orientation (i.e., facing the same direction). For Test 4, the SV and STP were centered in the same travel lane.

For Tests 1, 2, and 3, the SV was positioned such that it just contacted a vertical plane defining the rearmost location of the POV. For Test 4, the front-most location of the SV was positioned such that it just reached a vertical plane defined by the leading edge of

the STP first encountered by the SV (i.e., just before it is driven onto the STP). This is the “zero position.”

The zero position was documented prior to, and immediately after, conduct of each test series.

If the zero position reported by the data acquisition system was found to differ by more than  $\pm 2$  in ( $\pm 5$  cm) from that measured during collection of the pre-test static calibration data file, the pre-test longitudinal offset was adjusted to output zero and another pre-test static calibration data file was collected. If the zero position reported by the data acquisition system was found to differ by more than  $\pm 2$  in ( $\pm 5$  cm) from that measured during collection of the post-test static calibration data file, the test trials performed between collection of that post-test static calibration data file and the last valid pre-test static calibration data file were repeated.

Static data files were collected prior to, and immediately after, conduct each of the test series. The pre-test static files were reviewed prior to test conduct to confirm that all data channels were operational and were properly configured.

## 5. NUMBER OF TRIALS

A target total of seven (7) valid trials were performed for each scenario. In cases where the test driver performed more than seven trials, the first seven trials satisfying all test tolerances were used to assess the SV performance.

## 6. TRANSMISSION

All trials were performed with SV automatic transmissions in “Drive” or with manual transmissions in the highest gear capable of sustaining the desired test speed. Manual transmission clutches remained engaged during all maneuvers. The brake lights of the POV were not illuminated.

### **C. Principal Other Vehicle**

DBS testing requires a POV that realistically represents typical vehicles, does not suffer damage or cause damage to a test vehicle in the event of collision, and can be accurately positioned and moved during the tests. The tests reported herein made use of the NHTSA developed Strikeable Surrogate Vehicle (SSV).

This SSV system was designed specifically for common rear-end crash scenarios which AEB systems address. The key components of the SSV system are:

- A POV shell which is a visually and dimensionally accurate representation of a passenger car.
- A slider and load frame assembly to which the shell is attached.
- A two-rail track on which the slider operates.

- A road-based lateral restraint track.
- A tow vehicle.

The key requirements of the POV element are to:

- Provide an accurate representation of a real vehicle to DBS sensors, including cameras and radar.
- Be resistant to damage and inflict little or no damage to the SV as a result of repeated SV-to-POV impacts.

The key requirements of the POV delivery system are to:

- Accurately control the nominal POV speed up to 35 mph (56 km/h).
- Accurately control the lateral position of the POV within the travel lane.
- Allow the POV to move away from the SV after an impact occurs.

Operationally, the POV shell is attached to the slider and load frame, which includes rollers that allow the entire assembly to move longitudinally along the guide rail. The guide rail is coupled to a tow vehicle and guided by the lateral restraint track secured to the test track surface. The rail includes a provision for restraining the shell and roller assembly in the rearward direction. In operation, the shell and roller assembly engages the rail assembly through detents to prevent relative motion during run-up to test speeds and minor deceleration of the tow vehicle. The combination of rearward stops and forward motion detents allows the test conditions, such as relative POV-SV headway distance and speed etc., to be achieved and adjusted as needed in the preliminary part of a test. If during the test, the SV strikes the rear of the POV shell, the detents are overcome and the entire shell/roller assembly moves forward in a two-stage manner along the rail and away from the SV. The forward end of the rail has a soft stop to restrain forward motion of the shell/roller assembly. After impacting the SSV, the SV driver uses the steering wheel to maintain SV position in the center of the travel lane, thereby straddling the two-rail track. The SV driver must manually apply the SV brakes after impact. The SSV system is shown in Figures A6 through A8 and a detailed description can be found in the NHTSA report: NHTSA'S STRIKEABLE SURROGATE VEHICLE PRELIMINARY DESIGN + OVERVIEW, May 2013.

#### **D. Foundation Brake System Characterization**

Data collected and analyzed from a series of pre-test braking runs were used to objectively quantify the response of the vehicle's foundation brake system without the contribution of DBS. The results of these analyses were used to determine the brake pedal input magnitudes needed for the main tests.

This characterization was accomplished by recording longitudinal acceleration and brake pedal force and travel data for a variety of braking runs. For three initial brake characterization runs, the vehicle was driven at 45 mph, and the brakes were applied at a rate of 1 inch/sec up to the brake input level needed for at least 0.7 g. Linear regressions were performed on the data from each run to determine the linear vehicle deceleration

response as a function of both applied brake pedal force and brake pedal travel. The brake input force or displacement level needed to achieve a vehicle deceleration of 0.4 g was determined from the average of the three runs. Using the 0.4 g brake input force or displacement level found from the three initial runs, subsequent runs were performed at 25 mph, 35 mph, and 45 mph, with the brakes applied at a rate of 10 inch/sec to the determined 0.4 g brake input force or displacement level. For each of the three test speeds, if the average calculated deceleration level was found to be within  $0.4 \pm 0.025$  g, the resulting force or displacement was recorded and used. If the average calculated deceleration level exceeded this tolerance, the brake input force or displacement levels were adjusted and retested until the desired magnitude was realized. Prior to each braking event, the brake pad temperatures were required to be in the range of 149° - 212°F.

## **E. Brake Control**

### **1. SUBJECT VEHICLE PROGRAMMABLE BRAKE CONTROLLER**

To achieve accurate, repeatable, and reproducible SV brake pedal inputs, a programmable brake controller was used for all brake applications. The controller has the capability to operate in one of two user-selectable, closed-loop, control modes:

- Constant pedal displacement. By maintaining constant actuator stroke, the position of the vehicle's brake pedal remains fixed for the duration of the input. To achieve this, the brake controller modulates application force.
- Hybrid control. Hybrid control uses position-based control to command the initial brake application rate and actuator position, then changes to force-based control to command a reduction of applied force to a predetermined force. This force is maintained until the end of the braking maneuver by allowing the brake controller to modulate actuator displacement.

### **2. SUBJECT VEHICLE BRAKE PARAMETERS**

- Each test run began with the brake pedal in its natural resting position, with no preload or position offset.
- The onset of the brake application was considered to occur when the brake actuator had applied 2.5 lbf (11 N) of force to the brake pedal.
- The magnitude of the brake application was that needed to produce 0.4 g deceleration, as determined in the foundation brake characterization.
- The SV brake application rate was between 9 to 11 in/s (229 to 279 mm/s), where the application rate is defined as the slope of a linear regression line applied to brake pedal position data over a range from 25% to 75% of the commanded input magnitude.



### 3. POV AUTOMATIC BRAKING SYSTEM

The POV was equipped with an automatic braking system, which was used in Test Type

3. The braking system consisted of the following components:

- Electronically controlled linear actuator, mounted on the seat rail and attached to the brake pedal. The actuator can be programmed for control of stroke and rate.
- PC module programmed for control of the stroke and rate of the linear actuator.
- Switch to activate actuator.

#### **F. Instrumentation**

Table 5 lists the sensors, signal conditioning, and data acquisition equipment used for these tests.

**Table 5. Test Instrumentation and Equipment**

Type	Output	Range	Accuracy, Other Primary Specs	Mfr, Model	Serial Number	Calibration Dates Last Due
Tire Pressure Gauge	Vehicle Tire Pressure	0-100 psi 0-690 kPa	< 1% error between 20 and	Omega DPG8001	17042707002	By: DRI Date: 7/3/2019 Due: 7/3/2020
Platform Scales	Vehicle Total, Wheel, and Axle Load	2200 lb/platform 5338 N/	0.5% of applied load	Intercomp SWI	1110M206352	By: DRI Date: 1/6/2020 Due: 1/6/2021
Linear (string) encoder	Throttle pedal travel	10 in 254 mm	0.1 in 2.54 mm	UniMeasure LX-EP	45040532	By: DRI Date: 5/10/2019 Due: 5/10/2020
Load Cell	Force applied to brake pedal					By: DRI
		0 - 250 lb 0 -1112 N	0.1% FS	Honeywell 41A	1464391	Date: 8/30/2019 Due: 8/30/2020
		0-250 lb 1112 N	0.05% FS	Stellar Technology PNC700	1607338	Date: 8/30/2019 Due: 8/30/2020
Differential Global Positioning System	Position, Velocity	Latitude: ±90 deg Longitude: ±180 deg Altitude: 0-18 km Velocity: 0-1000 knots	Horizontal Position: ±1 cm Vertical Position: ±2 cm Velocity: 0.05 km/h	Trimble GPS Receiver, 5700 (base station and in-vehicle)	00440100989	NA

**Table 5. Test Instrumentation and Equipment (continued)**

Type	Output	Range	Accuracy, Other Primary Specs	Mfr, Model	Serial Number	Calibration Dates Last Due
Multi-Axis Inertial Sensing System	Position; Longitudinal, Lateral, and Vertical Accels; Lateral, Longitudinal and Vertical Velocities; Roll, Pitch, Yaw Rates; Roll, Pitch, Yaw Angles	Accels $\pm 10g$ , Angular Rate $\pm 100$ deg/s, Angle $>45$ deg, Velocity $>200$ km/h	Accels $.01g$ , Angular Rate $0.05$ deg/s, Angle $0.05$ deg, Velocity $0.1$ km/h	Oxford Inertial +		By: Oxford Technical Solutions
					2258	Date: 5/3/2019 Due: 5/3/2021
					2182	Date: 9/16/2019 Due: 9/16/2021
Real-Time Calculation of Position and Velocity Relative to Lane Markings (LDW) and POV (FCW)	Distance and Velocity to lane markings (LDW) and POV (FCW)	Lateral Lane Dist: $\pm 30$ m Lateral Lane Velocity: $\pm 20$ m/sec Longitudinal Range to POV: $\pm 200$ m Longitudinal Range Rate: $\pm 50$ m/sec	Lateral Distance to Lane Marking: $\pm 2$ cm Lateral Velocity to Lane Marking: $\pm 0.02$ m/sec Longitudinal Range: $\pm 3$ cm Longitudinal Range Rate: $\pm 0.02$ m/sec	Oxford Technical Solutions (OXTS), RT-Range	97	NA
Microphone	Sound (to measure time at alert)	Frequency Response: 80 Hz – 20 kHz	Signal-to-noise: 64 dB, 1 kHz at 1 Pa	Audio-Technica AT899	NA	NA
Light Sensor	Light intensity (to measure time at alert)	Spectral Bandwidth: 440-800 nm	Rise time $< 10$ msec	DRI designed and developed Light Sensor	NA	NA
Accelerometer	Acceleration (to measure time at alert)	$\pm 5g$	$\leq 3\%$ of full range	Silicon Designs, 2210-005	NA	NA

Type	Output	Range	Accuracy, Other Primary Specs	Mfr, Model	Serial Number	Calibration Dates Last Due
Coordinate Measurement Machine	Inertial Sensing System Coordinates	0-8 ft 0-2.4 m	±.0020 in. ±.051 mm (Single point articulation accuracy)	Faro Arm, Fusion	UO8-05-08-06636	By: DRI Date: 1/6/2020 Due: 1/6/2021
Type	Description			Mfr, Model	Serial Number	
Data Acquisition System	Data acquisition is achieved using a dSPACE MicroAutoBox II. Data from the Oxford IMU, including Longitudinal, Lateral, and Vertical Acceleration, Roll, Yaw, and Pitch Rate, Forward and Lateral Velocity, Roll and Pitch Angle are sent over Ethernet to the MicroAutoBox. The Oxford IMUs are calibrated per the manufacturer's recommended schedule (listed above).			dSPACE Micro-Autobox II 1401/1513		
				Base Board	549068	
				I/O Board	588523	

## APPENDIX A

### Photographs

## LIST OF FIGURES

	Page
Figure A1.	Front View of Subject Vehicle..... A-3
Figure A2.	Rear View of Subject Vehicle ..... A-4
Figure A3.	Window Sticker (Monroney Label)..... A-5
Figure A4.	Vehicle Certification Label ..... A-6
Figure A5.	Tire Placard ..... A-7
Figure A6.	Rear View of Principal Other Vehicle (SSV) ..... A-8
Figure A7.	Load Frame/Slider of SSV ..... A-9
Figure A8.	Two-Rail Track and Road-Based Lateral Restraint Track..... A-10
Figure A9.	Steel Trench Plate ..... A-11
Figure A10.	DGPS, Inertial Measurement Unit, and MicroAutoBox Installed in Subject Vehicle..... A-12
Figure A11.	Sensor for Detecting Auditory Alerts..... A-13
Figure A12.	Sensor for Detecting Visual Alerts ..... A-14
Figure A13.	Computer Installed in Subject Vehicle ..... A-15
Figure A14.	Brake Actuator Installed in Subject Vehicle ..... A-16
Figure A15.	Brake Actuator Installed in POV System ..... A-17
Figure A16.	DBS (SBS) System Setup Menus..... A-18
Figure A17.	DBS (SBS) Visual Alert..... A-19

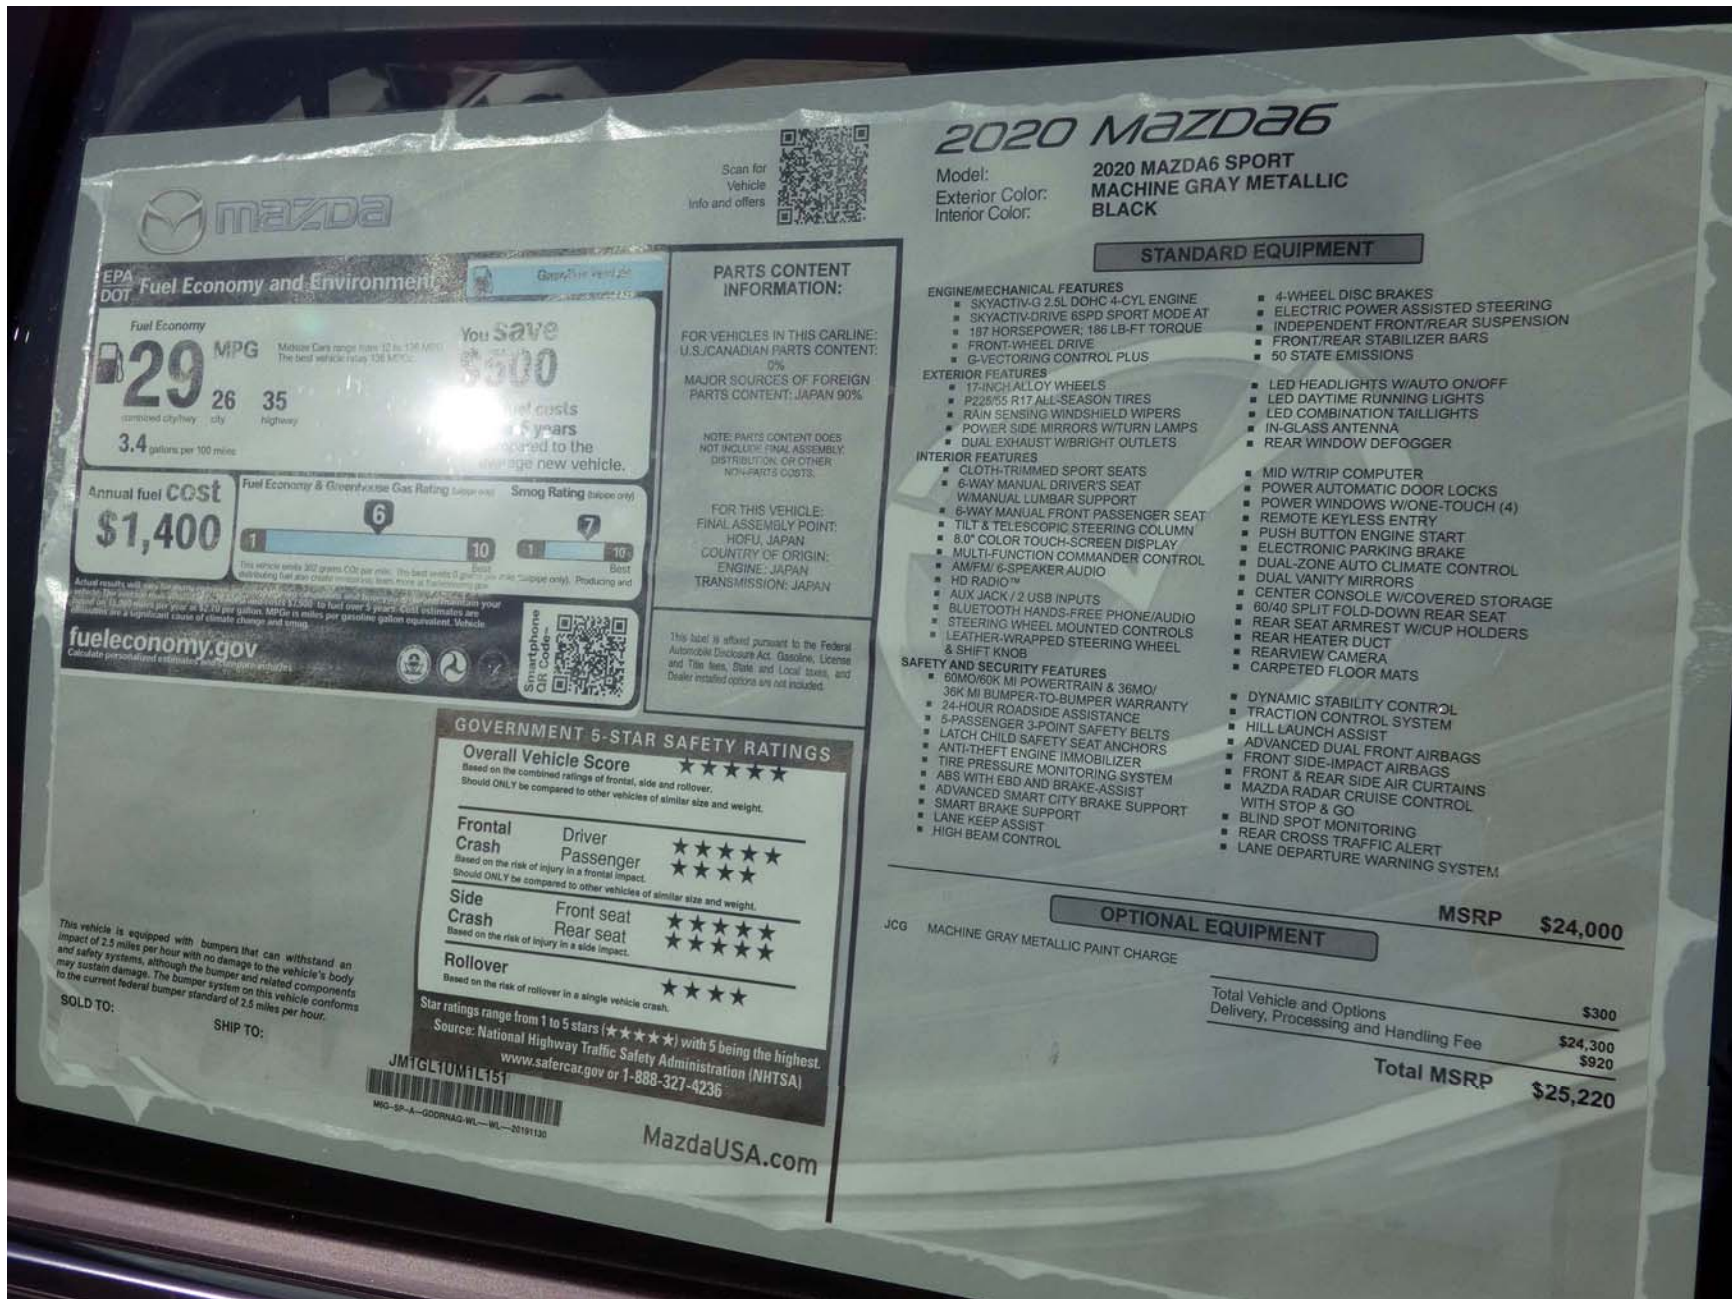


Figure A1. Front View of Subject Vehicle



Figure A2. Rear View of Subject Vehicle





# 2020 Mazda6

Model: 2020 MAZDA6 SPORT  
 Exterior Color: MACHINE GRAY METALLIC  
 Interior Color: BLACK

## EPA DOT Fuel Economy and Environment

**Fuel Economy**

**29** MPG  
 26 35  
 combined city/hwy

**You Save \$500**  
 fuel costs 5 years compared to the average new vehicle.

3.4 gallons per 100 miles

**Annual fuel cost \$1,400**

**Fuel Economy & Greenhouse Gas Rating** 6

**Smog Rating** 7

Actual results will vary depending on driving conditions. The best results will be achieved by driving at 50 mph or less on highways and 35 mph or less in city traffic. The best results will be achieved by driving at 50 mph or less on highways and 35 mph or less in city traffic. The best results will be achieved by driving at 50 mph or less on highways and 35 mph or less in city traffic.

**fuel economy.gov**  
 Calculate personalized estimates and compare models.

## PARTS CONTENT INFORMATION:

FOR VEHICLES IN THIS CARLINE:  
 U.S./CANADIAN PARTS CONTENT: 0%  
 MAJOR SOURCES OF FOREIGN PARTS CONTENT: JAPAN 90%

NOTE: PARTS CONTENT DOES NOT INCLUDE FINAL ASSEMBLY, DISTRIBUTION, OR OTHER NON-PARTS COSTS.

FOR THIS VEHICLE:  
 FINAL ASSEMBLY POINT: HOFU, JAPAN  
 COUNTRY OF ORIGIN: ENGINE: JAPAN  
 TRANSMISSION: JAPAN

This label is affixed pursuant to the Federal Automobile Disclosure Act. Gasoline, License and Title fees, State and Local taxes, and Dealer installed options are not included.

## STANDARD EQUIPMENT

- ENGINE/MECHANICAL FEATURES
  - SKYACTIV-G 2.5L DOHC 4-CYL ENGINE
  - SKYACTIV-DRIVE 6SPD SPORT MODE AT
  - 187 HORSEPOWER; 186 LB-FT TORQUE
  - FRONT-WHEEL DRIVE
  - 6-VECTORED CONTROL PLUS
- EXTERIOR FEATURES
  - 17-INCH ALLOY WHEELS
  - P225/55 R17 ALL-SEASON TIRES
  - RAIN SENSING WINDSHIELD WIPERS
  - POWER SIDE MIRRORS W/TURN LAMPS
  - DUAL EXHAUST W/BRIGHT OUTLETS
- INTERIOR FEATURES
  - CLOTH-TRIMMED SPORT SEATS
  - 6-WAY MANUAL DRIVER'S SEAT
  - W/MANUAL LUMBAR SUPPORT
  - 6-WAY MANUAL FRONT PASSENGER SEAT
  - TILT & TELESCOPIC STEERING COLUMN
  - 8.0" COLOR TOUCH-SCREEN DISPLAY
  - MULTI-FUNCTION COMMANDER CONTROL
  - AM/FM/6-SPEAKER AUDIO
  - HD RADIO
  - AUX JACK / 2 USB INPUTS
  - BLUETOOTH HANDS-FREE PHONE/AUDIO
  - STEERING WHEEL MOUNTED CONTROLS
  - LEATHER-WRAPPED STEERING WHEEL & SHIFT KNOB
- SAFETY AND SECURITY FEATURES
  - 60M/60K MI POWERTRAIN & 36MO/36K MI BUMPER-TO-BUMPER WARRANTY
  - 24-HOUR ROADSIDE ASSISTANCE
  - 5-PASSENGER 3-POINT SAFETY BELTS
  - LATCH CHILD SAFETY SEAT ANCHORS
  - ANTI-THEFT ENGINE IMMOBILIZER
  - TIRE PRESSURE MONITORING SYSTEM
  - ABS WITH EBD AND BRAKE-ASSIST
  - ADVANCED SMART CITY BRAKE SUPPORT
  - SMART BRAKE SUPPORT
  - LANE KEEP ASSIST
  - HIGH BEAM CONTROL
- 4-WHEEL DISC BRAKES
- ELECTRIC POWER ASSISTED STEERING
- INDEPENDENT FRONT/REAR SUSPENSION
- FRONT/REAR STABILIZER BARS
- 50 STATE EMISSIONS
- LED HEADLIGHTS W/AUTO ON/OFF
- LED DAYTIME RUNNING LIGHTS
- LED COMBINATION TAILLIGHTS
- IN-GLASS ANTENNA
- REAR WINDOW DEFOGGER
- MID W/TRIP COMPUTER
- POWER AUTOMATIC DOOR LOCKS
- POWER WINDOWS W/ONE-TOUCH (4)
- REMOTE KEYLESS ENTRY
- PUSH BUTTON ENGINE START
- ELECTRONIC PARKING BRAKE
- DUAL-ZONE AUTO CLIMATE CONTROL
- DUAL VANITY MIRRORS
- CENTER CONSOLE W/COVERED STORAGE
- 60/40 SPLIT FOLD-DOWN REAR SEAT
- REAR SEAT ARMREST W/CUP HOLDERS
- REAR HEATER DUCT
- REARVIEW CAMERA
- CARPETED FLOOR MATS
- DYNAMIC STABILITY CONTROL
- TRACTION CONTROL SYSTEM
- HILL LAUNCH ASSIST
- ADVANCED DUAL FRONT AIRBAGS
- FRONT SIDE-IMPACT AIRBAGS
- FRONT & REAR SIDE AIR CURTAINS
- MAZDA RADAR CRUISE CONTROL WITH STOP & GO
- BLIND SPOT MONITORING
- REAR CROSS TRAFFIC ALERT
- LANE DEPARTURE WARNING SYSTEM

## OPTIONAL EQUIPMENT

JCG MACHINE GRAY METALLIC PAINT CHARGE	MSRP \$24,000
Total Vehicle and Options Delivery, Processing and Handling Fee	\$300
	\$24,300
	\$920
<b>Total MSRP</b>	<b>\$25,220</b>

## GOVERNMENT 5-STAR SAFETY RATINGS

**Overall Vehicle Score ★★★★★**  
 Based on the combined ratings of frontal, side and rollover. Should ONLY be compared to other vehicles of similar size and weight.

**Frontal Crash** ★★★★★  
 Driver Passenger  
 Based on the risk of injury in a frontal impact. Should ONLY be compared to other vehicles of similar size and weight.

**Side Crash** ★★★★★  
 Front seat Rear seat  
 Based on the risk of injury in a side impact.

**Rollover** ★★★★★  
 Based on the risk of rollover in a single vehicle crash.

Star ratings range from 1 to 5 stars (★★★★★) with 5 being the highest. Source: National Highway Traffic Safety Administration (NHTSA) www.safercar.gov or 1-888-327-4236


This vehicle is equipped with bumpers that can withstand an impact of 2.5 miles per hour with no damage to the vehicle's body and safety systems, although the bumper and related components may sustain damage. The bumper system on this vehicle conforms to the current federal bumper standard of 2.5 miles per hour.

SOLD TO:  
 SHIP TO:



MazdaUSA.com

Figure A3. Window Sticker (Monroney Label)

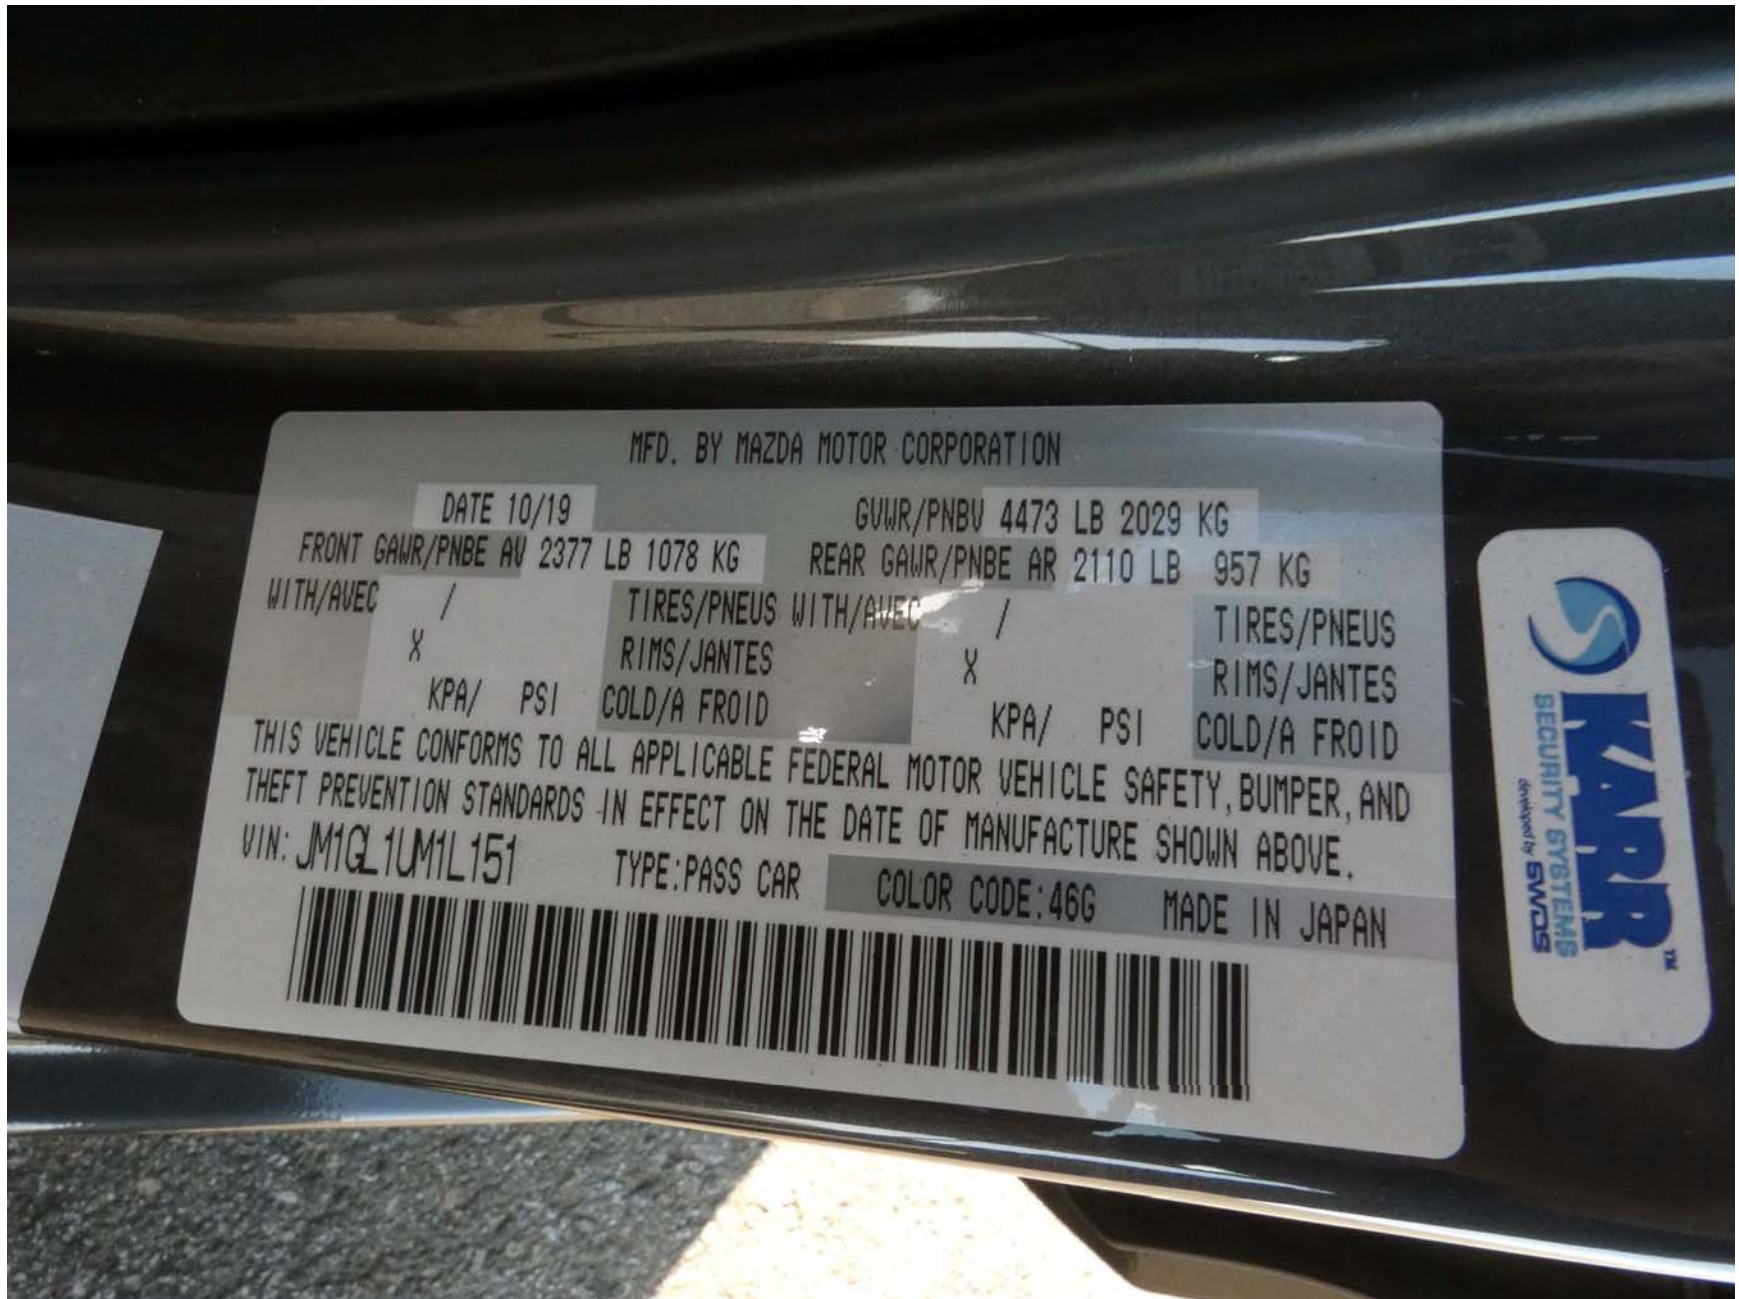

MFD. BY MAZDA MOTOR CORPORATION

DATE 10/19

GVWR/PNBV 4473 LB 2029 KG

FRONT GAWR/PNBE AV 2377 LB 1078 KG

REAR GAWR/PNBE AR 2110 LB 957 KG

WITH/AVEC

X

TIRES/PNEUS WITH/AVEC

X

TIRES/PNEUS

RIMS/JANTES

RIMS/JANTES

KPA/ PSI

COLD/A FROID

KPA/ PSI

COLD/A FROID

THIS VEHICLE CONFORMS TO ALL APPLICABLE FEDERAL MOTOR VEHICLE SAFETY, BUMPER, AND THEFT PREVENTION STANDARDS IN EFFECT ON THE DATE OF MANUFACTURE SHOWN ABOVE.

VIN: JM1GL1UM1L151


TYPE: PASS CAR

COLOR CODE: 46G

MADE IN JAPAN



Figure A4. Vehicle Certification Label

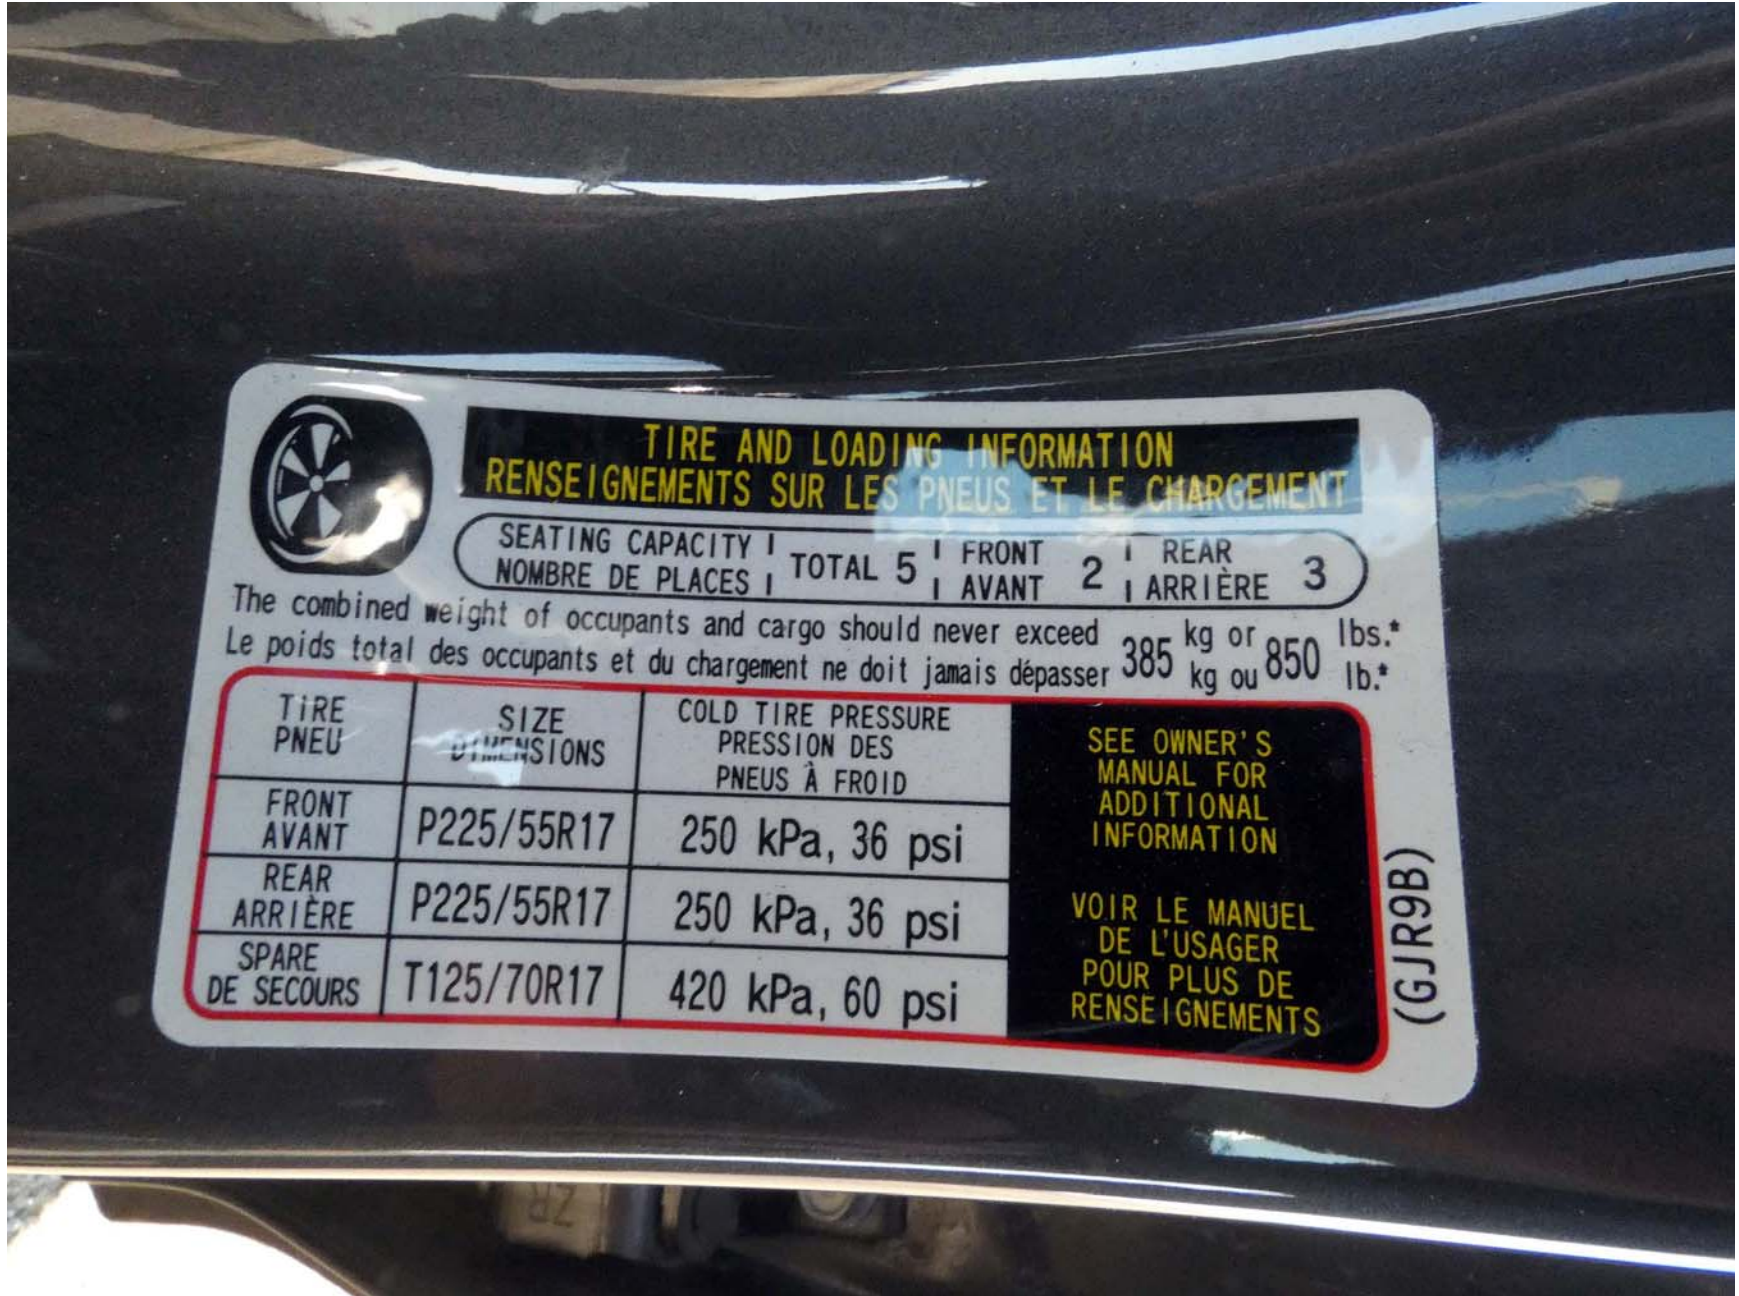

**TIRE AND LOADING INFORMATION**  
**RENSEIGNEMENTS SUR LES PNEUS ET LE CHARGEMENT**

SEATING CAPACITY | TOTAL 5 | FRONT 2 | REAR 3  
NOMBRE DE PLACES | TOTAL 5 | AVANT 2 | ARRIERE 3

The combined weight of occupants and cargo should never exceed 385 kg or 850 lbs.\*  
Le poids total des occupants et du chargement ne doit jamais dépasser 385 kg ou 850 lb.\*

TIRE PNEU	SIZE DIMENSIONS	COLD TIRE PRESSURE PRESSION DES PNEUS À FROID
FRONT AVANT	P225/55R17	250 kPa, 36 psi
REAR ARRIERE	P225/55R17	250 kPa, 36 psi
SPARE DE SECOURS	T125/70R17	420 kPa, 60 psi

SEE OWNER'S MANUAL FOR ADDITIONAL INFORMATION  
VOIR LE MANUEL DE L'USAGER POUR PLUS DE RENSEIGNEMENTS

(GJR9B)

Figure A5. Tire Placard  
A-7



Figure A6. Rear View of Principal Other Vehicle (SSV)



Figure A7. Load Frame/Slider of SSV

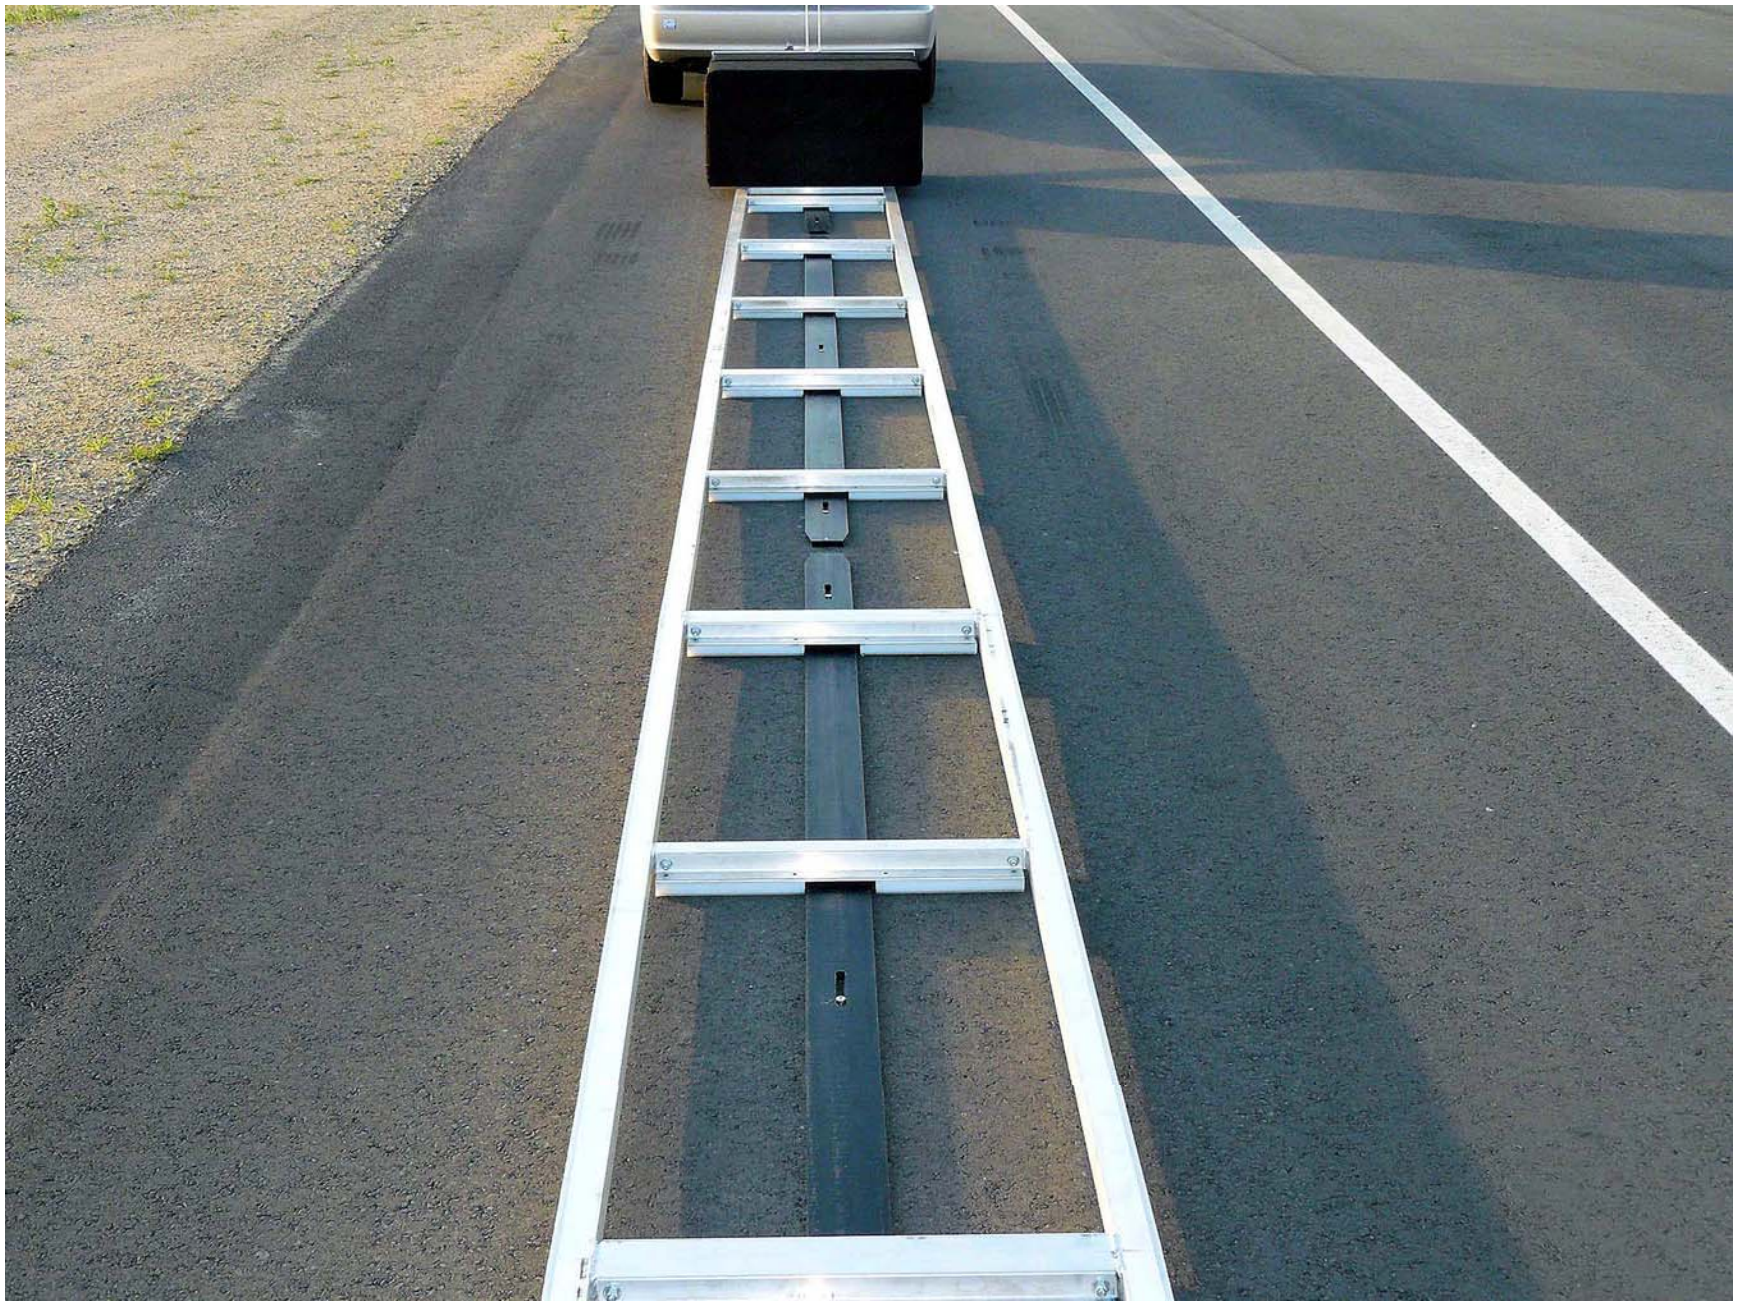


Figure A8. Two-Rail Track and Road-Based Lateral Restraint Track



Figure A9. Steel Trench Plate  
A-11



Figure A10. DGPS, Inertial Measurement Unit, and MicroAutoBox Installed in Subject Vehicle





Figure A11. Sensor for Detecting Auditory Alerts



Figure A12. Sensor for Detecting Visual Alerts

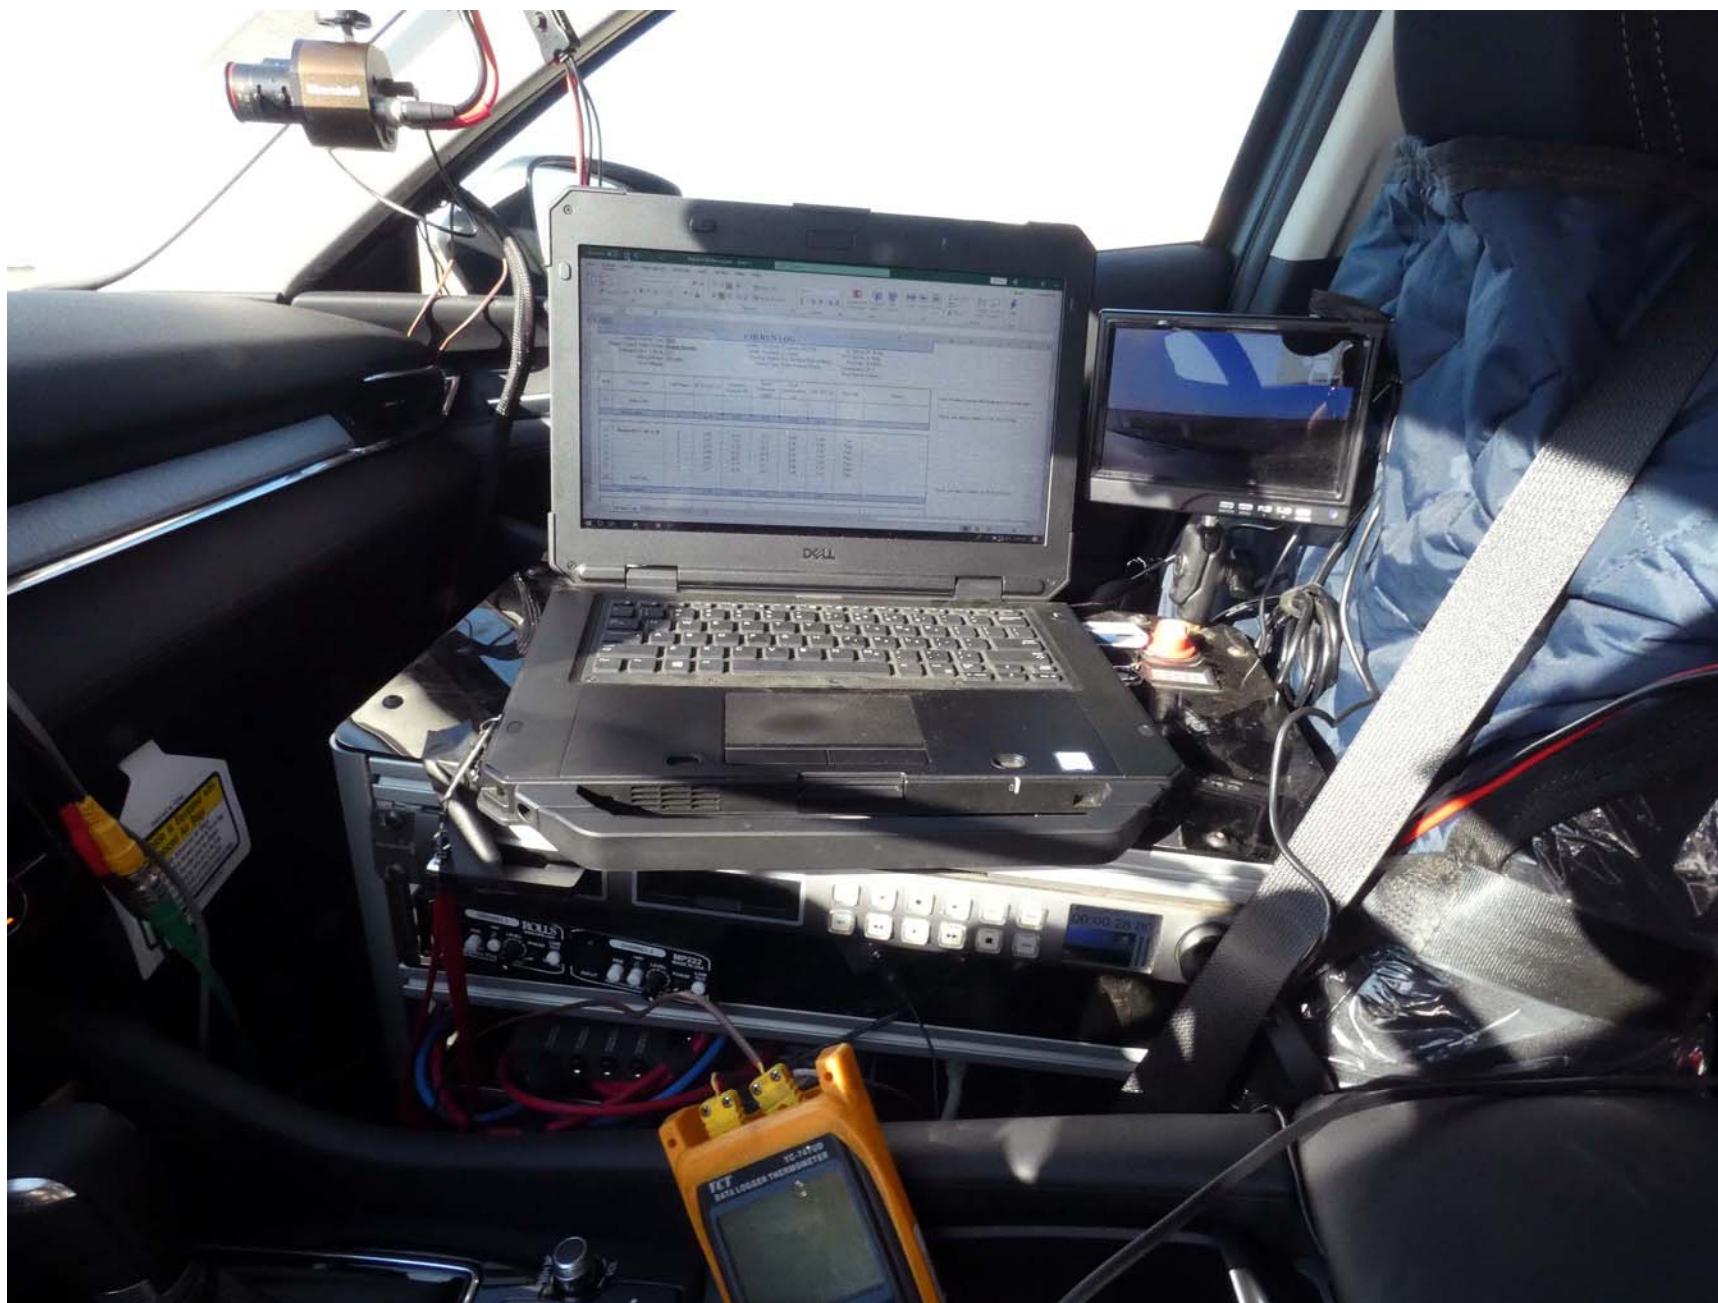


Figure A13. Computer Installed in Subject Vehicle



Figure A14. Brake Actuator Installed in Subject Vehicle



Figure A15. Brake Actuator Installed in POV System  
A-17



Figure A16. DBS (SBS) System Setup Menus


















Figure A17. DBS (SBS) Visual Alert

## APPENDIX B

Excerpts from Owner's Manual











## Instrument Cluster and Display

Signal	Warning	Page
	Master Warning Indication	7-28
	Electric Parking Brake (EPB) Warning Indication/Warning Light* <sup>1</sup>	7-28
	Check Engine Light* <sup>1</sup>	7-28
	*Selective Catalytic Reduction (SCR) system Warning Indication/Warning Light* <sup>1</sup>	7-28
<b>AT</b>	Automatic Transaxle Warning Indication	7-28
<b>4WD</b>	*AWD Warning Indication	7-28
	Air Bag/Front Seat Belt Pretensioner System Warning Light* <sup>1</sup>	7-28
	Tire Pressure Monitoring System Warning Light* <sup>1</sup>	Flashing 7-28
		Turns on 7-35
 (Amber/White)	KEY Warning Indication	Amber 7-28
		White 7-35
 (Amber)	High Beam Control System (HBC) Warning Indication/Warning Light* <sup>1</sup>	7-28
	Blind Spot Monitoring (BSM) Warning Indication	7-28
 (Amber)	*Mazda Radar Cruise Control with Stop & Go function (MRCC with Stop & Go function) Warning Indication	7-28
 (Amber)	Lane-keep Assist System (LAS) & Lane Departure Warning System (LDWS) Warning Indication	7-28
	LED Headlight Warning Light* <sup>1</sup>	7-28
	*Smart Brake Support/Smart City Brake Support (SBS/SCBS) Warning Indication	7-35
	Low Fuel Warning Indication/Warning Light	7-35
	Check Fuel Cap Warning Indication/Warning Light* <sup>1</sup>	7-35
















\*Some models. **4-27**

## Instrument Cluster and Display










Signal	Indicator	Page
 (White)	*Mazda Radar Cruise Control with Stop & Go function (MRCC with Stop & Go function) Main Indication	4-154
 (Green)	*Mazda Radar Cruise Control with Stop & Go function (MRCC with Stop & Go function) Set Indication	4-154
	Lane-keep Assist System (LAS) & Lane Departure Warning System (LDWS) Indication	4-166
 OFF	*Lane-keep Assist System (LAS) & Lane Departure Warning System (LDWS) OFF Indicator Light* <sup>1</sup>	4-171
	Smart City Brake Support (SCBS) Indication	Advanced Smart City Brake Support (Advanced SCBS) 4-176
		Smart City Brake Support (SCBS) 4-179
 OFF	*Smart Brake Support/Smart City Brake Support (SBS/SCBS) OFF Indicator Light* <sup>1</sup>	Advanced Smart City Brake Support (Advanced SCBS) 4-176
		Smart City Brake Support (SCBS) 4-180
		Smart Brake Support (SBS) System 4-182
 (White)	*Cruise Main Indication	4-222
 (Green)	*Cruise Set Indication	4-222

\*1 The light turns on when the ignition is switched on for an operation check, and turns off a few seconds later or when the engine is started. If the light does not turn on or remains turned on, have the vehicle inspected at an Authorized Mazda Dealer.

## Instrument Cluster and Display

Signal	Warning	Page
	Power Steering Malfunction Indication	7-25
	Master Warning Indication	7-28
	Electric Parking Brake (EPB) Warning Indication/Warning Light* <sup>1</sup>	7-28
	Check Engine Light* <sup>1</sup>	7-28
	*Selective Catalytic Reduction (SCR) system Warning Indication/Warning Light* <sup>1</sup>	7-28
<b>AT</b>	Automatic Transaxle Warning Indication	7-28
<b>4WD</b>	*AWD Warning Indication	7-28
	Air Bag/Front Seat Belt Pretensioner System Warning Light* <sup>1</sup>	7-28
	Tire Pressure Monitoring System Warning Light* <sup>1</sup>	Flashing 7-28
		Turns on 7-35
 (Amber/White)	KEY Warning Indication	Amber 7-28
		White 7-35
 (Amber)	*High Beam Control System (HBC) Warning Indication/Warning Light* <sup>1</sup>	7-28
	*Blind Spot Monitoring (BSM) Warning Indication	7-28
 (Amber)	*Mazda Radar Cruise Control with Stop & Go function (MRCC with Stop & Go function) Warning Indication	7-28
	*Lane-keep Assist System (LAS) & Lane Departure Warning System (LDWS) Warning Indication	7-28
	LED Headlight Warning Light* <sup>1</sup>	7-28
 (Amber)	*Smart Brake Support/Smart City Brake Support (SBS/SCBS) Warning Indication	7-35
	Low Fuel Warning Indication	7-35

## Instrument Cluster and Display

Signal	Indicator	Page
	*Blind Spot Monitoring (BSM) OFF Indicator Light* <sup>1</sup>	Malfunction 7-28
		Except malfunction 4-132
 (White)	*Mazda Radar Cruise Control with Stop & Go function (MRCC with Stop & Go function) Main Indication	4-154
 (Green)	*Mazda Radar Cruise Control with Stop & Go function (MRCC with Stop & Go function) Set Indication	4-154
	*Lane-keep Assist System (LAS) & Lane Departure Warning System (LDWS) Indication	4-166
	*Lane-keep Assist System (LAS) & Lane Departure Warning System (LDWS) OFF Indicator Light* <sup>1</sup>	4-171
	*Smart City Brake Support (SCBS) Indication	Advanced Smart City Brake Sup- port (Advanced SCBS) 4-176
		Smart City Brake Support (SCBS) 4-179
	*Smart Brake Support/Smart City Brake Support (SBS/SCBS) OFF Indicator Light* <sup>1</sup>	Advanced Smart City Brake Sup- port (Advanced SCBS) 4-176
		Smart City Brake Support (SCBS) 4-180
		Smart Brake Support (SBS) System 4-182
 (White)	*Cruise Main Indication	4-222
 (Green)	*Cruise Set Indication	4-222

\*Some models. **4-47**

**Collision damage reduction in low vehicle speed range**

**Forward driving**

Smart City Brake Support (SCBS)..... page 4-177  
Advanced Smart City Brake Support (Advanced SCBS).....page 4-174

**Collision damage reduction in medium/high speed range**

Smart Brake Support (SBS).....page 4-180

**▼ Camera and Sensors**

**Forward Sensing Camera (FSC)**

The Forward Sensing Camera (FSC) detects lane indications and recognizes headlights, taillights and city lights during nighttime driving. In addition, it also detects the vehicle ahead, pedestrians, or obstructions. The following systems also use the Forward Sensing Camera (FSC).

- High Beam Control system (HBC)
- Lane-keep Assist System (LAS) & Lane Departure Warning System (LDWS)
- Traffic Sign Recognition System (TSR)
- Mazda Radar Cruise Control with Stop & Go function (MRCC with Stop & Go function)
- Advanced Smart City Brake Support (Advanced SCBS)
- Smart City Brake Support (SCBS)
- Smart Brake Support (SBS)

The Forward Sensing Camera (FSC) is installed at the top of the windshield near the rearview mirror.

Refer to Forward Sensing Camera (FSC) on page 4-210.

**Radar sensor (front)**

The radar sensor (front) functions by detecting the radio waves reflected off a vehicle ahead sent from the radar sensor. The following systems also use the radar sensor (front).

- Mazda Radar Cruise Control with Stop & Go function (MRCC with Stop & Go function)
- Distance Recognition Support System (DRSS)
- Smart Brake Support (SBS)

The radar sensor (front) is mounted behind the radiator grille.

Refer to Radar Sensor (Front) on page 4-215.

## i-ACTIVSENSE

---

### ▼ Collision Warning

If there is the possibility of a collision with a vehicle ahead, the beep sounds continuously and a warning is indicated in the multi-information display or the active driving display.

**BRAKE!**

#### NOTE

*The operation distance and volume of the collision warning can be changed. Refer to Safety Equipment on page 9-12.*

### ▼ Automatic Brake Operation Display

The automatic brake operation display is indicated on the multi-information display after the Advanced SCBS is operated.



**Smart City Brake  
Support  
Activated**

#### NOTE

- *The collision warning beep sounds intermittently while the Advanced SCBS brake or brake assist (Advanced SCBS brake assist) is operating.*
- *If the vehicle is stopped by the Advanced SCBS operation and the brake pedal is not depressed, the warning beep sounds 1 time after about 2 seconds and the Advanced SCBS brake is automatically released.*

### ▼ Stopping the Advanced Smart City Brake Support (Advanced SCBS) System Operation

The Advanced SCBS system can be temporarily deactivated. Refer to Safety Equipment on page 9-12.

**4-176**

When the Advanced SCBS system is turned off, the Smart City Brake Support (SCBS) OFF indicator light turns on.



When the engine is restarted, the system becomes operational.

#### NOTE

*When the Advanced SCBS system is set to inoperable, the Smart Brake Support (SBS) are also set to inoperable.*

▼ **Stopping the Smart City Brake Support (SCBS) System Operation**

The SCBS system can be temporarily deactivated.  
Refer to Safety Equipment on page 9-12.  
When the SCBS system is turned off, the Smart City Brake Support (SCBS) OFF indicator light turns on.



When the engine is restarted, the system becomes operational.

**NOTE**

*When the SCBS system is set to inoperable, the Smart Brake Support (SBS) are also set to inoperable.*

**Smart Brake Support (SBS)\***

The SBS system alerts the driver of a possible collision using a display and warning sound if the radar sensor (front) and the Forward Sensing Camera (FSC) determine that there is the possibility of a collision with a vehicle ahead while the vehicle is being driven at about 15 km/h or faster (10 mph or faster). Furthermore, if the radar sensor (front) and the Forward Sensing Camera (FSC) determines that a collision is unavoidable, the automatic brake control is performed to reduce damage in the event of a collision.

In addition, when the driver depresses the brake pedal, the brakes are applied firmly and quickly to assist. (Brake Assist (SBS brake assist))

**⚠ WARNING**

**Do not rely completely on the SBS system and always drive carefully:**

*The SBS is designed to reduce damage in the event of a collision, not avoid an accident. The ability to detect an obstruction is limited depending on the obstruction, weather conditions, or traffic conditions. Therefore, if the accelerator pedal or brake pedal is mistakenly operated it could result in an accident. Always verify the safety of the surrounding area and depress the brake pedal or accelerator pedal while keeping a safer distance from vehicles ahead or on-coming vehicles.*

**⚠ CAUTION**

In the following cases, turn the system off to prevent a mis-operation:

- The vehicle is being towed or when towing another vehicle.
- The vehicle is on a chassis roller.
- When driving on rough roads such as in areas of dense grass or off-road.

**NOTE**

- The SBS system operates when all of the following conditions are met:
  - The ignition is switched ON.
  - The SBS system is on.
  - The vehicle speed is about 15 km/h or faster (10 mph or faster).
  - The relative speed between your vehicle and the vehicle ahead is about 15 km/h or faster (10 mph or faster).
  - The Dynamic Stability Control (DSC) is not operating.
- The SBS system may not operate under the following conditions:
  - If the vehicle is accelerated rapidly and it comes close to a vehicle ahead.
  - The vehicle is driven at the same speed as the vehicle ahead.
  - The accelerator pedal is depressed.
  - The brake pedal is depressed.
  - The steering wheel is being operated.
  - The selector lever is being operated.
  - The turn signal is being used.
  - When the vehicle ahead is not equipped with taillights or the taillights are turned off.
- When warnings and messages, such as a dirty windshield, related to the Forward Sensing Camera (FSC) are being displayed in the multi-information display.
- Although the objects which activate the system are four-wheeled vehicles, the radar sensor (front) could detect the following objects, determine them to be an obstruction, and operate the SBS system.
  - Objects on the road at the entrance to a curve (including guardrails and snow banks).
  - A vehicle appears in the opposite lane while cornering or rounding a curve.
  - When crossing a narrow bridge.
  - When passing under a low gate or through a tunnel or narrow gate.
  - When entering an underground parking area.
  - Metal objects, bumps, or protruding objects on the road.
  - If you suddenly come close to a vehicle ahead.
  - When driving in areas where there is high grass or forage.
  - Two-wheeled vehicles such as motorbikes or bicycles.
  - Pedestrians or non-metallic objects such as standing trees.
- When the system operates, the user is notified by the multi-information display.
- If there is a problem with the SBS system, a message is displayed in the multi-information display. Check the center display to verify the problem and then have your vehicle inspected by an Authorized Mazda Dealer.



*Refer to Message Indicated on Display on page 7-43.*

▼ **Collision Warning**

If there is the possibility of a collision with a vehicle ahead, the beep sounds continuously and a warning is indicated in the multi-information display and the active driving display.

**BRAKE!**

▼ **Stopping The Smart Brake Support (SBS) System Operation**

The SBS system can be temporarily deactivated.

Refer to Safety Equipment on page 9-12.

When the SBS system is turned off, the SBS OFF indicator light turns on.



When the engine is restarted, the system becomes operational.


**NOTE**

*If the SBS system operation is turned off, the Smart City Brake Support (SCBS) system operation is turned off simultaneously.*

## Forward Sensing Camera (FSC)\*

Your vehicle is equipped with a Forward Sensing Camera (FSC). The Forward Sensing Camera (FSC) is positioned near the rearview mirror and used by the following systems.

- High Beam Control System (HBC)
- Lane-keep Assist System (LAS) & Lane Departure Warning System (LDWS)
- Traffic Sign Recognition System (TSR)
- Advanced Smart City Brake Support (Advanced SCBS)
- Smart City Brake Support (SCBS)
- Mazda Radar Cruise Control with Stop & Go function (MRCC with Stop & Go function)
- Smart Brake Support (SBS)

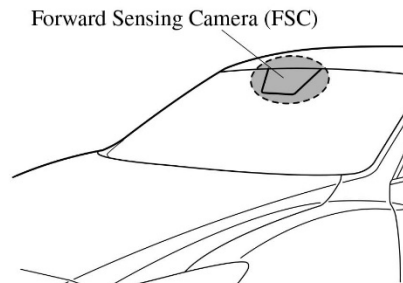

The Forward Sensing Camera (FSC) determines the conditions ahead of the vehicle while traveling at night and detects traffic lanes. The distance in which the Forward Sensing Camera (FSC) can detect objects varies depending on the surrounding conditions.

### **WARNING**

**Do not modify the suspension:**

*If the vehicle height or inclination is changed, the system will not be able to correctly detect vehicles ahead. This will result in the system not operating normally or mistakenly operating, which could cause a serious accident.*

### **CAUTION**

➤ *Do not apply accessories, stickers or film to the windshield near the Forward Sensing Camera (FSC).*

*If the area in front of the Forward Sensing Camera (FSC) lens is obstructed, it will cause the system to not operate correctly. Consequently, each system may not operate normally which could lead to an unexpected accident.*


## Radar Sensor (Front)\*

Your vehicle is equipped with a radar sensor (front).  
The following systems also use the radar sensor (front).

- Distance Recognition Support System (DRSS)
- Mazda Radar Cruise Control with Stop & Go function (MRCC with Stop & Go function)
- Smart Brake Support (SBS)

The radar sensor (front) functions by detecting the radio waves reflected off a vehicle ahead or an obstruction sent from the radar sensor.

The radar sensor (front) is mounted behind the front emblem.

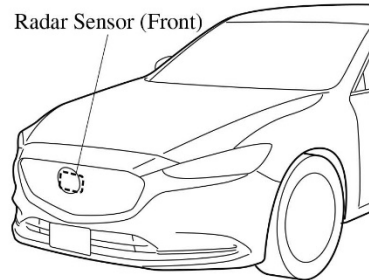

If “Front Radar Sensor Blocked” is displayed in the multi-information display of the instrument cluster, clean the area around the radar sensor (front).

### **CAUTION**

Heed the following precautions to assure correct operation of each system.





- Do not adhere stickers (including transparent stickers) to the surface of the radiator grille and front emblem in and around the radar sensor (front), and do not replace the radiator grille and front emblem with any product that is not a genuine product designed for use with the radar sensor (front).
- The radar sensor (front) includes a function for detecting soiling of the radar sensor's front surface and informing the driver, however, depending on the conditions, it may require time to detect or it may not detect plastic shopping bags, ice or snow. If this occurs, the system may not operate correctly, therefore always keep the radar sensor (front) clean.
- Do not install a grille guard.
- If the front part of the vehicle has been damaged in a vehicle accident, the position of the radar sensor (front) may have moved. Stop the system immediately and always have the vehicle inspected at an Authorized Mazda Dealer.
- Do not use the front bumper to push other vehicles or obstructions such as when pulling out of a parking space. Otherwise, the radar sensor (front) could be hit and its position deviated.

\*Some models. **4-215**

## Warning/Indicator Lights and Warning Sounds

### ▼ Taking Action

Take the appropriate action and verify that the warning light turns off.

Signal	Warning	Action to be taken
 (Amber) Smart Brake Support/ Smart City Brake Support (SBS/SCBS) Warning Indication/ Warning Light*	The light turns on if the windshield or the radar sensor are dirty, or there is a malfunction in the system.	Verify the reason why the warning light is illuminated on the center display. If the reason why the warning light is illuminated is due to a dirty windshield, clean the windshield. If the warning light is illuminated because of a dirty radar sensor, clean the front emblem. For any other reasons, have the vehicle inspected at an Authorized Mazda Dealer.
 Low Fuel Warning Indication/Warning Light	The light turns on when the remaining fuel is about 9.0 L (2.3 US gal, 1.9 Imp gal).  <b>NOTE</b> <i>The light illumination timing may vary because fuel inside the fuel tank moves around according to the driving conditions and the vehicle posture.</i>	Add fuel.
 Check Fuel Cap Warning Indication/Warning Light	If the check fuel cap warning light illuminates while driving, the fuel-filler cap may not be installed properly.	Stop the engine and reinstall the fuel-filler cap. Refer to Refueling on page 3-27.
 Engine Oil Level Warning Light	This warning light indicates that the engine oil level is around the MIN mark (page 6-28).	Add 1 L (0.3 US gal, 0.2 Imp gal) of engine oil (page 6-25).

\*Some models.

## APPENDIX C

### Run Log

Subject Vehicle: **2020 Mazda Mazda6 Sport**

Test Date: **4/14/2020**

Principal Other Vehicle: **SSV**

Run	Test Type	Valid Run?	FCW TTC (s)	Minimum Distance (ft)	Peak Deceleration (g)	Pass/Fail	Notes
	Brake characterization and determination						See Appendix D
12	Static Run						
13	<b>Stopped POV</b>	Y	2.84	11.74	1.05	Pass	
14		Y	2.36	10.92	1.03	Pass	
15		Y	2.61	12.31	1.08	Pass	Video cut out early
16		Y	2.86	10.94	1.06	Pass	
17		Y	2.82	12.27	1.08	Pass	
18		N					Throttle
19		Y	2.82	10.02	1.04	Pass	
20		Y	2.44	11.39	1.08	Pass	
21	Static Run						
22	<b>Slower POV, 25 vs 10</b>	N					Throttle, Brake Rate
23		N					Throttle encoder released
24		Y	2.13	6.44	0.64	Pass	
25		Y	2.28	6.11	0.60	Pass	
26		Y	2.32	7.28	1.19	Pass	
27		Y	2.21	5.84	0.60	Pass	

Run	Test Type	Valid Run?	FCW TTC (s)	Minimum Distance (ft)	Peak Deceleration (g)	Pass/Fail	Notes
28		Y	2.29	6.66	1.16	Pass	
29		Y	2.23	7.39	1.17	Pass	
30		Y	2.17	6.56	0.62	Pass	
31	Static run						
32	<b>Slower POV, 45 vs 20</b>	N					Brake Application Rate
33		N					GPS Fix Type
34		Y	2.83	12.39	1.13	Pass	
35		N					Comm Errors
36		Y	2.81	13.35	1.11	Pass	
37		Y	2.81	12.72	1.10	Pass	
38		N					GPS Fix Type
39		Y	2.70	13.68	1.15	Pass	Video cutout early
40		Y	2.70	12.81	1.08	Pass	
41		Y	2.83	13.64	1.14	Pass	
42		Y	2.73	13.77	1.12	Pass	
43	Static run						
44	<b>Braking POV, 35</b>	Y	2.05	9.97	0.69	Pass	
45		Y	2.02	10.57	0.69	Pass	
46		Y	1.90	13.35	0.73	Pass	

Run	Test Type	Valid Run?	FCW TTC (s)	Minimum Distance (ft)	Peak Deceleration (g)	Pass/Fail	Notes
47		Y	1.85	13.29	0.72	Pass	
48		Y	2.08	11.83	0.73	Pass	
49		Y	1.78	13.75	0.74	Pass	
50		Y	1.78	11.49	0.71	Pass	
51	Static run						
52	STP - Static run						
53	<b>Baseline, 25</b>	N					Braking High
54		N					Braking High
55		Y			0.45		Displacement changed to 1.95 in
56		Y			0.47		
57		Y			0.44		
58		Y			0.46		
59		Y			0.45		
60		Y			0.45		
61		Y			0.45		
62	STP - Static run						
63	<b>Baseline, 45</b>	Y			0.42		Displacement changed to 1.95 in
64		Y			0.43		
65		Y			0.46		
66		Y			0.43		



Run	Test Type	Valid Run?	FCW TTC (s)	Minimum Distance (ft)	Peak Deceleration (g)	Pass/Fail	Notes
67		Y			0.49		
68		Y			0.49		
69		Y			0.44		
70	STP - Static run						
71	<b>STP False Positive, 25</b>	Y			0.46	Pass	
72		Y			0.46	Pass	
73		Y			0.46	Pass	
74		Y			0.45	Pass	
75		Y			0.45	Pass	
76		Y			0.44	Pass	
77		Y			0.44	Pass	
78	STP - Static run						
79	<b>STP False Positive, 45</b>	Y			0.41	Pass	
80		Y			0.43	Pass	
81		Y			0.42	Pass	
82		Y			0.43	Pass	
83		Y			0.43	Pass	
84		Y			0.41	Pass	
85		Y			0.42	Pass	

<b>Run</b>	<b>Test Type</b>	<b>Valid Run?</b>	<b>FCW TTC (s)</b>	<b>Minimum Distance (ft)</b>	<b>Peak Deceleration (g)</b>	<b>Pass/Fail</b>	<b>Notes</b>
86	STP - Static run						

## APPENDIX D

### Brake Characterization

Subject Vehicle: **2020 Mazda Mazda6 Sport**

Test Date: **4/14/2020**

DBS Initial Brake Characterization				
Run Number	Stroke at 0.4 g (in)	Force at 0.4 g (lb)	Slope	Intercept
1	2.713552	20.49122	0.59855	0.160762
2	2.453411	17.92963	0.584239	0.176909
3	2.415036	17.53524	0.615341	0.134459

DBS Brake Characterization Determination								
Run	DBS Mode	Speed	Valid Run	Average Decel. (g)	0.4 g Stroke Value (in)	0.4 g Force Value (lb)	Stroke/Force Calculator (in)	Notes
4	Displacement	35	Y	0.481	2.53		2.10	
5			Y	0.369	2.10		2.28	
6			Y	0.427	2.25		2.11	
7			N					SV speed
8			N					Throttle
9			Y	0.393	2.20		0.00	
10		25	Y	0.424	2.20		0.00	
11		45	Y	0.380	2.20		0.00	

Appendix E

TIME HISTORY PLOTS

## LIST OF FIGURES

	Page
Figure E1. Example Time History for Stopped POV, Passing .....	E-11
Figure E2. Example Time History for Slower POV 25 vs. 10, Passing .....	E-12
Figure E3. Example Time History for Slower POV 45 vs. 20, Passing .....	E-13
Figure E4. Example Time History for Decelerating POV 35, Passing .....	E-14
Figure E5. Example Time History for False Positive Baseline 25 .....	E-15
Figure E6. Example Time History for False Positive Baseline 45 .....	E-16
Figure E7. Example Time History for False Positive Steel Plate 25, Passing .....	E-17
Figure E8. Example Time History for False Positive Steel Plate 45, Passing .....	E-18
Figure E9. Example Time History for DBS Brake Characterization, Passing .....	E-19
Figure E10. Example Time History Displaying Invalid POV Acceleration Criteria .....	E-20
Figure E11. Example Time History Displaying Invalid Brake Force Criteria .....	E-21
Figure E12. Example Time History for a Failed Run .....	E-22
Figure E13. Time History for DBS Run 13, SV Encounters Stopped POV .....	E-23
Figure E14. Time History for DBS Run 14, SV Encounters Stopped POV .....	E-24
Figure E15. Time History for DBS Run 15, SV Encounters Stopped POV .....	E-25
Figure E16. Time History for DBS Run 16, SV Encounters Stopped POV .....	E-26
Figure E17. Time History for DBS Run 17, SV Encounters Stopped POV .....	E-27
Figure E18. Time History for DBS Run 19, SV Encounters Stopped POV .....	E-28
Figure E19. Time History for DBS Run 20, SV Encounters Stopped POV .....	E-29
Figure E20. Time History for DBS Run 24, SV Encounters Slower POV, SV 25 mph, POV 10 mph .....	E-30
Figure E21. Time History for DBS Run 25, SV Encounters Slower POV, SV 25 mph, POV 10 mph .....	E-31
Figure E22. Time History for DBS Run 26, SV Encounters Slower POV, SV 25 mph, POV 10 mph .....	E-32
Figure E23. Time History for DBS Run 27, SV Encounters Slower POV, SV 25 mph, POV 10 mph .....	E-33
Figure E24. Time History for DBS Run 28, SV Encounters Slower POV, SV 25 mph, POV 10 mph .....	E-34
Figure E25. Time History for DBS Run 29, SV Encounters Slower POV, SV 25 mph, POV 10 mph .....	E-35
Figure E26. Time History for DBS Run 30, SV Encounters Slower POV, SV 25 mph, POV 10 mph .....	E-36
Figure E27. Time History for DBS Run 34, SV Encounters Slower POV, SV 45 mph, POV 20 mph .....	E-37
Figure E28. Time History for DBS Run 36, SV Encounters Slower POV, SV 45 mph, POV 20 mph .....	E-38
Figure E29. Time History for DBS Run 37, SV Encounters Slower POV, SV 45 mph, POV 20 mph .....	E-39
Figure E30. Time History for DBS Run 39, SV Encounters Slower POV, SV 45 mph, POV 20 mph .....	E-40

Figure E31. Time History for DBS Run 40, SV Encounters Slower POV, SV 45 mph, POV 20 mph .....	E-41
Figure E32. Time History for DBS Run 41, SV Encounters Slower POV, SV 45 mph, POV 20 mph .....	E-42
Figure E33. Time History for DBS Run 42, SV Encounters Slower POV, SV 45 mph, POV 20 mph .....	E-43
Figure E34. Time History for DBS Run 44, SV Encounters Decelerating POV, SV 35 mph, POV 35 mph .....	E-44
Figure E35. Time History for DBS Run 45, SV Encounters Decelerating POV, SV 35 mph, POV 35 mph .....	E-45
Figure E36. Time History for DBS Run 46, SV Encounters Decelerating POV, SV 35 mph, POV 35 mph .....	E-46
Figure E37. Time History for DBS Run 47, SV Encounters Decelerating POV, SV 35 mph, POV 35 mph .....	E-47
Figure E38. Time History for DBS Run 48, SV Encounters Decelerating POV, SV 35 mph, POV 35 mph .....	E-48
Figure E39. Time History for DBS Run 49, SV Encounters Decelerating POV, SV 35 mph, POV 35 mph .....	E-49
Figure E40. Time History for DBS Run 50, SV Encounters Decelerating POV, SV 35 mph, POV 35 mph .....	E-50
Figure E41. Time History for DBS Run 55, False Positive Baseline, SV 25 mph .....	E-51
Figure E42. Time History for DBS Run 56, False Positive Baseline, SV 25 mph .....	E-52
Figure E43. Time History for DBS Run 57, False Positive Baseline, SV 25 mph .....	E-53
Figure E44. Time History for DBS Run 58, False Positive Baseline, SV 25 mph .....	E-54
Figure E45. Time History for DBS Run 59, False Positive Baseline, SV 25 mph .....	E-55
Figure E46. Time History for DBS Run 60, False Positive Baseline, SV 25 mph .....	E-56
Figure E47. Time History for DBS Run 61, False Positive Baseline, SV 25 mph .....	E-57
Figure E48. Time History for DBS Run 63, False Positive Baseline, SV 45 mph .....	E-58
Figure E49. Time History for DBS Run 64, False Positive Baseline, SV 45 mph .....	E-59
Figure E50. Time History for DBS Run 65, False Positive Baseline, SV 45 mph .....	E-60
Figure E51. Time History for DBS Run 66, False Positive Baseline, SV 45 mph .....	E-61
Figure E52. Time History for DBS Run 67, False Positive Baseline, SV 45 mph .....	E-62
Figure E53. Time History for DBS Run 68, False Positive Baseline, SV 45 mph .....	E-63
Figure E54. Time History for DBS Run 69, False Positive Baseline, SV 45 mph .....	E-64
Figure E55. Time History for DBS Run 71, SV Encounters Steel Trench Plate, SV 25 mph .....	E-65
Figure E56. Time History for DBS Run 72, SV Encounters Steel Trench Plate, SV 25 mph .....	E-66
Figure E57. Time History for DBS Run 73, SV Encounters Steel Trench Plate, SV 25 mph .....	E-67
Figure E58. Time History for DBS Run 74, SV Encounters Steel Trench Plate, SV 25 mph .....	E-68
Figure E59. Time History for DBS Run 75, SV Encounters Steel Trench Plate, SV 25 mph .....	E-69
Figure E60. Time History for DBS Run 76, SV Encounters Steel Trench Plate, SV 25 mph .....	E-70

Figure E61. Time History for DBS Run 77, SV Encounters Steel Trench Plate, SV 25 mph .....	E-71
Figure E62. Time History for DBS Run 79, SV Encounters Steel Trench Plate, SV 45 mph .....	E-72
Figure E63. Time History for DBS Run 80, SV Encounters Steel Trench Plate, SV 45 mph .....	E-73
Figure E64. Time History for DBS Run 81, SV Encounters Steel Trench Plate, SV 45 mph .....	E-74
Figure E65. Time History for DBS Run 82, SV Encounters Steel Trench Plate, SV 45 mph .....	E-75
Figure E66. Time History for DBS Run 83, SV Encounters Steel Trench Plate, SV 45 mph .....	E-76
Figure E67. Time History for DBS Run 84, SV Encounters Steel Trench Plate, SV 45 mph .....	E-77
Figure E68. Time History for DBS Run 85, SV Encounters Steel Trench Plate, SV 45 mph .....	E-78
Figure E69. Time History for DBS Run 1, Brake Characterization Initial .....	E-79
Figure E70. Time History for DBS Run 2, Brake Characterization Initial .....	E-80
Figure E71. Time History for DBS Run 3, Brake Characterization Initial .....	E-81
Figure E72. Time History for DBS Run 4, Brake Characterization Determination 35 mph .....	E-82
Figure E73. Time History for DBS Run 5, Brake Characterization Determination 35 mph .....	E-83
Figure E74. Time History for DBS Run 6, Brake Characterization Determination 35 mph .....	E-84
Figure E75. Time History for DBS Run 9, Brake Characterization Determination 35 mph .....	E-85
Figure E76. Time History for DBS Run 10, Brake Characterization Determination 25 mph .....	E-86
Figure E77. Time History for DBS Run 11, Brake Characterization Determination 45 mph .....	E-87



## Description of Time History Plots

A set of time history plots is provided for each valid run in the test series. Each set of plots comprises time varying data from both the Subject Vehicle (SV) and the Principal Other Vehicle (POV), as well as pass/fail envelopes and thresholds. Plots shown herein are grouped by test type and are presented sequentially within a given test type. The following is a description of data types shown in the time history plots, as well as a description of the color code indicating to which vehicle the data pertain.

### Time History Plot Description

Each time history plot consists of data relevant to the test type under consideration, and therefore the data channels plotted vary according to test type. The test types (shown in the plot titles) include:

- Stopped POV (SV at 25 mph)
- Slower POV, 25/10 (SV at 25 mph, POV at 10 mph)
- Slower POV, 45/20 (SV at 45 mph, POV at 20 mph)
- Decelerating POV 35 mph (Both vehicles at 35 mph with 13.8 m gap, POV brakes at 0.3 g)
- False Positive Baseline 25 mph (Baseline run at 25 mph)
- False Positive Baseline 45 mph (Baseline run at 45 mph)
- False Positive STP 25 mph (Steel trench plate run over at 25 mph)
- False Positive STP 45 mph (Steel trench plate run over at 45 mph)
- DBS Brake Characterization Initial
- DBS Brake Characterization Determination

Time history figures include the following sub-plots:

- FCW Warning – Displays the Forward Collision Warning alert (which can be audible, visual, or haptic). Depending on the type of FCW alert or instrumentation used to measure the alert, this can be any combination of the following:
  - Filtered, rectified, and normalized sound signal. The vertical scale is 0 to 1.
  - Filtered, rectified, and normalized acceleration (i.e., haptic alert, such as steering wheel vibration). The vertical scale is 0 to 1.
  - Normalized light sensor signal. The vertical scale is 0 to 1.

As only the audible or haptic alert is perceptible by the driver during a test run, the earliest of either of these alerts is used to define the onset of the FCW alert. A vertical black bar on the plot indicates the TTC (sec) at the first moment of the warning issued by the FCW system. The FCW TTC is displayed to the right of the subplot in green.

- Headway (ft) – Longitudinal separation between the frontmost point of the Subject Vehicle and the rearmost point of the Strikeable Surrogate Vehicle (SSV) towed by the Principal Other Vehicle. The minimum headway during the run is displayed to the right of the subplot.
- SV/POV Speed (mph) – Speed of the Subject Vehicle and the Principal Other Vehicle (if any). For DBS tests, in the case of an impact, the speed reduction experienced by the Subject Vehicle up until the moment of impact is displayed to the right of the subplot.
- Yaw Rate (deg/sec) – Yaw rate of the Subject Vehicle and Principal Other Vehicle (if any).
- Lateral Offset (ft) – Lateral offset within the lane of the Subject Vehicle to the center of the lane of travel. Note that for tests involving the Strikeable Surrogate Vehicle (SSV), the associated lateral restraint track is defined to be the center of the lane of travel. If testing is done with a different POV which does not have a lateral restraint track, lateral offset is defined to be the lateral offset between the SV and POV.
- Ax (g) – Longitudinal acceleration of the Subject Vehicle and Principal Other Vehicle (if any). The peak value of Ax for the SV is shown on the subplot.
- Pedal Position – Position of the accelerator pedal and brake pedal. The units for the brake pedal are inches and the units for the accelerator pedal are percent of full scale divided by 10.
- Brake Force (lb) – Force on the brake pedal as applied by the DBS controller. The TTC at the onset of the brake by the DBS controller is shown on the subplot. Additionally, the average force at the brake pedal while the DBS controller is active is displayed.

Note that the minimum (worst) GPS fix type is displayed in the lower right corner of each page. The only valid fix type is RTK fixed (displayed in green). If the fix type during any portion of the test was anything other than RTK fixed, then “RTK Fixed OR LESS!!” is displayed in red.

## Envelopes and Thresholds

Some of the time history plot figures contain either green or yellow envelopes and/or black or red threshold lines. These envelopes and thresholds are used to programmatically and visually determine the validity of a given test run. Envelope and threshold exceedances are indicated with either red shading or red asterisks, and red text is placed to the right side of the plot indicating the type of exceedance. Such exceedances indicate either that the test was invalid or that the requirements of the test were not met (i.e., failure of the AEB system).

For plots with green envelopes, in order for the test to be valid, the time-varying data must not exceed the envelope boundaries at any time within the envelope. Exceedances of a green envelope are indicated by red shading in the area between the measured time-varying data and the envelope boundaries.

With the exception of the brake force plots (see description below), for plots with yellow envelopes, in order for the test to be valid, the time-varying data must not exceed the envelope at the beginning (left edge of the boundary) and/or end (right edge), but may exceed the boundary during the time between the left and right edges. Exceedances at the left or right extent of a yellow envelope are indicated by red asterisks.

For the headway plot, a dashed black threshold line indicating a relative headway of zero is given. If no impact occurs, a green circle is displayed at the moment of minimum distance. If impact occurs, a red asterisk is displayed at the moment of impact.

For the Ax plot, if the scenario is an AEB brake to stop scenario, a vertical dashed black line is displayed for all plots indicating the moment of first POV braking. The yellow envelope in this case is relevant to the POV braking only. The left edge of the envelope is at 1.5 seconds after the first POV braking. A solid black threshold line extends horizontally 0.5 seconds to the left of the envelope. This threshold line represents the time during which the Ax of the Principal Other Vehicle must first achieve 0.27g (the upper edge of the envelope, i.e.,  $0.30 \text{ g} \pm 0.03 \text{ g}$ ). A green circle or red asterisk is displayed at the moment the POV brake level achieves 0.27g. A green circle indicates that the test was valid (the threshold was crossed during the appropriate interval) and a red asterisk indicates that the test was invalid (the threshold was crossed out of the appropriate interval).

For the pedal position plot, a thick black bar appears on the brake pedal position data over the DBS controller brake onset period to signify the time over which the brake application rate is determined. The calculated brake application rate is also displayed on the figure.

For the brake force plots:

- If the tests are done in Hybrid mode, the brake force plot shows a dashed black threshold line indicating a brake force of 2.5 lbs. For the time period where the DBS controller is active, the brake force at the pedal must not fall below this 2.5 lb threshold. Exceedances of this threshold are indicated by red shading in the area between the measured time-varying data and the dashed threshold line. A blue envelope represents the target average brake force necessary to be valid
- If the tests are done in Displacement mode, there are no relevant brake force level thresholds or average brake force calculations.

In the instance of the “last second” braking applied by the brake robot, a thick vertical red line will appear on the plots at the moment the brake robot activates. Note that last second braking is only done when it has been determined by the onboard computer that test failure cannot be avoided. It is done simply to reduce the collision speed in order to minimize the likelihood of damage to the SSV and to the Subject Vehicle. Therefore, data validity checks are not performed after the red line, and certain values, such as minimum distance or peak deceleration, may not be accurate.

### **Color Codes**

Color codes have been adopted to easily identify which data correspond to which vehicle, as well as to indicate the types of envelopes and thresholds used in the plots.

Color codes can be broken into four categories:

1. Time-varying data
2. Validation envelopes and thresholds
3. Individual data points
4. Text

1. Time-varying data color codes:

- Blue = Subject Vehicle data
- Magenta = Principal Other Vehicle data
- Brown = Relative data between SV and POV (i.e., TTC, lateral offset and headway distance)

## 2. Validation envelope and threshold color codes:

- Green envelope = time varying data must be within the envelope at all times in order to be valid
- Yellow envelope = time varying data must be within limits at left and/or right ends
- Blue envelope = visualized target range for the time varying data averaged over a period equal to the length of the envelope
- Black threshold (Solid) = time varying data must cross this threshold in the time period shown in order to be valid
- Black threshold (Dashed) = for reference only – this can include warning level thresholds, TTC thresholds, and acceleration thresholds.
- Red threshold (Solid) = for reference only – indicates the activation of last-minute braking by the brake robot. Data after the solid red line is not used to determine test validity.

## 3. Individual data point color codes:

- Green circle = passing or valid value at a given moment in time
- Red asterisk = failing or invalid value at a given moment in time

## 4. Text color codes:

- Green = passing or valid value
- Red = failing or invalid value

## Other Notations

- NG – Indicates that the value for that variable was outside of bounds and therefore “No Good”.
- No Wng – No warning was detected.
- POV – Indicates that the value for the Principal Other Vehicle was out of bounds.
- SV – Indicates that the value for the Subject Vehicle was out of bounds.
- SR – Shows the speed reduction value.
- Thr – Indicates that the requirements for the throttle were not met.

The minimum (worst) GPS fix type is displayed in the lower right corner of each page. The only valid fix type is RTK fixed (displayed in green). If the fix type during any portion of the test was anything other than RTK fixed, then “RTK Fixed OR LESS!!” is displayed in red.

Examples of valid or passing time history plots for each test type (including passing, failing, and invalid runs) are shown in Figure E1 through E12. Figures E1 through E8 show passing runs for each of the 8 test types. Figure E9 shows an example of a passing brake characterization run. Figures E10 and E11 show examples of invalid runs. Figure E12 shows an example of a valid test that failed the DBS requirements. Time history data plots for the tests of the vehicle under consideration herein are provided beginning with Figure E13.

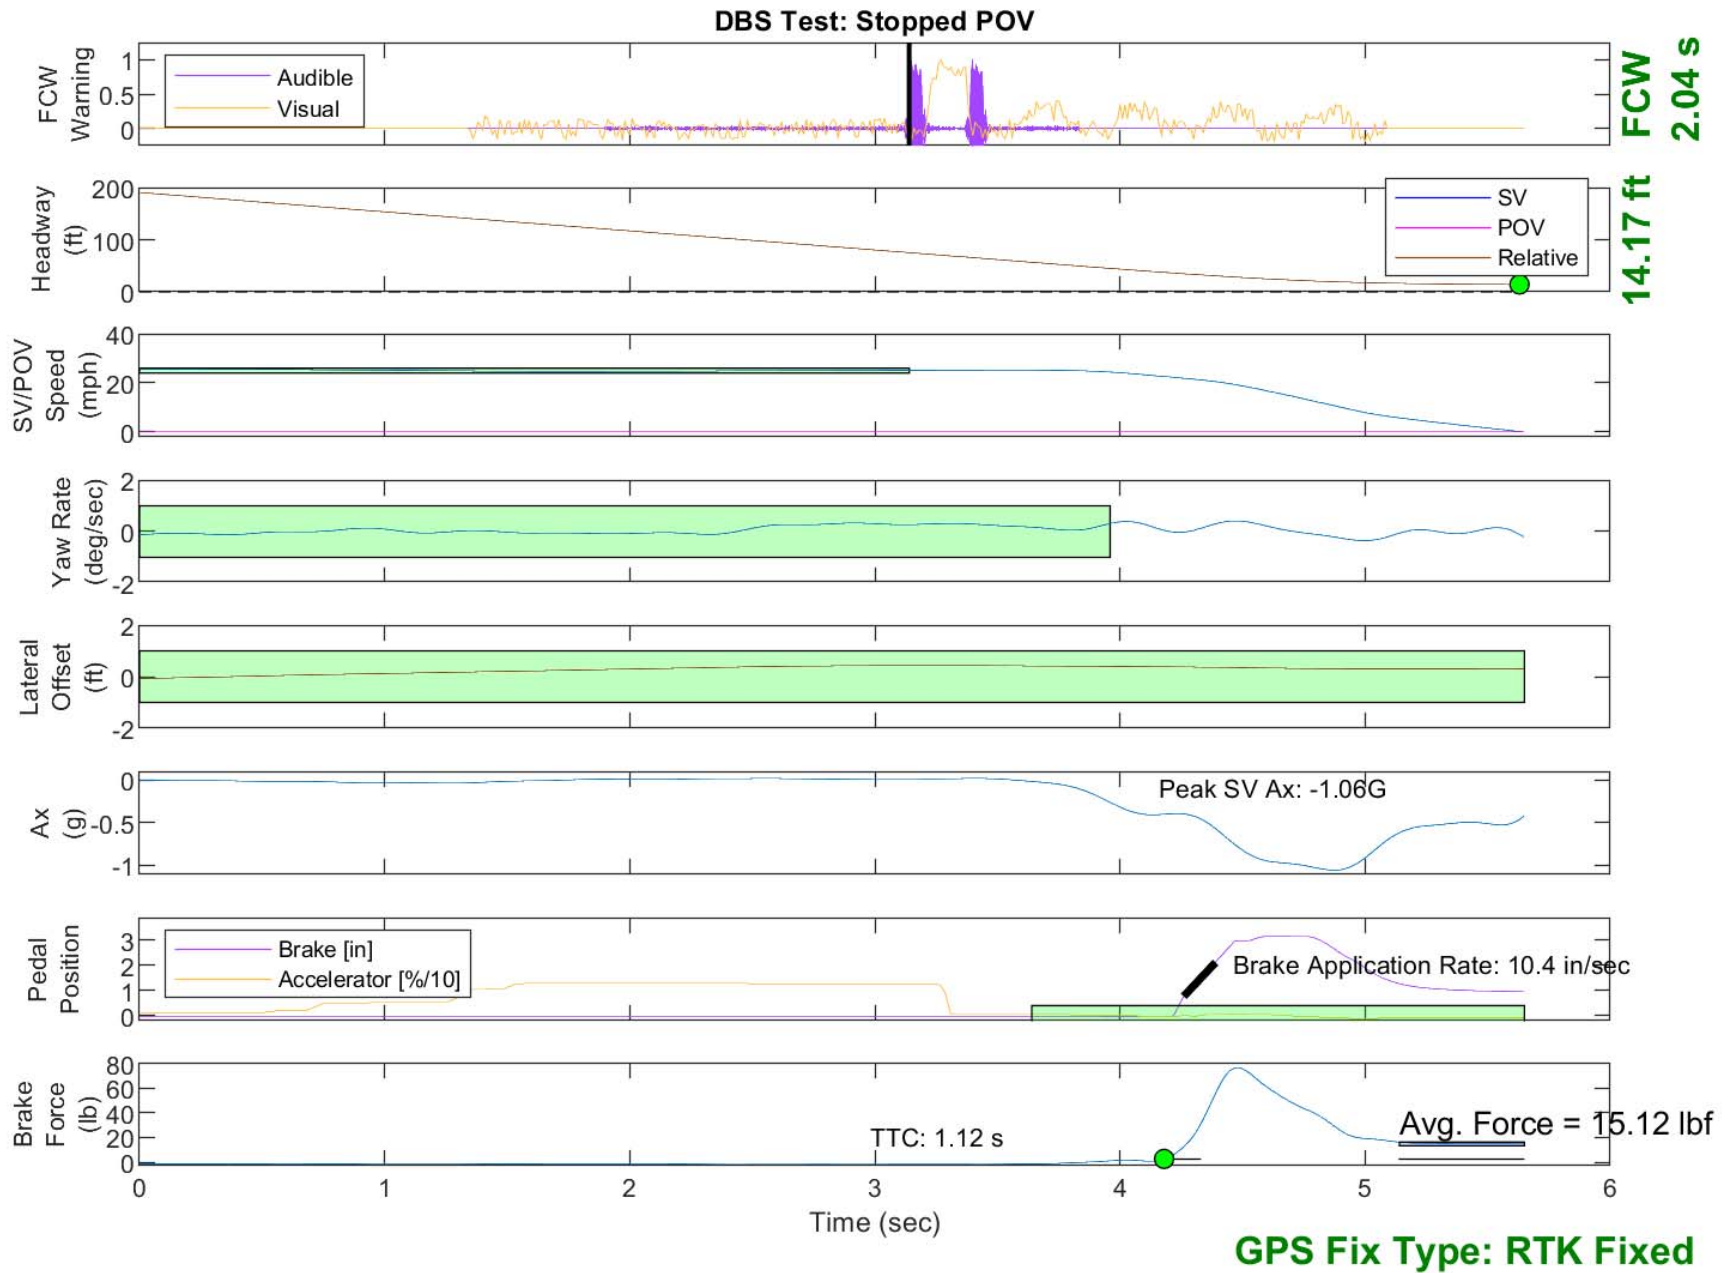


Figure E1. Example Time History for Stopped POV, Passing

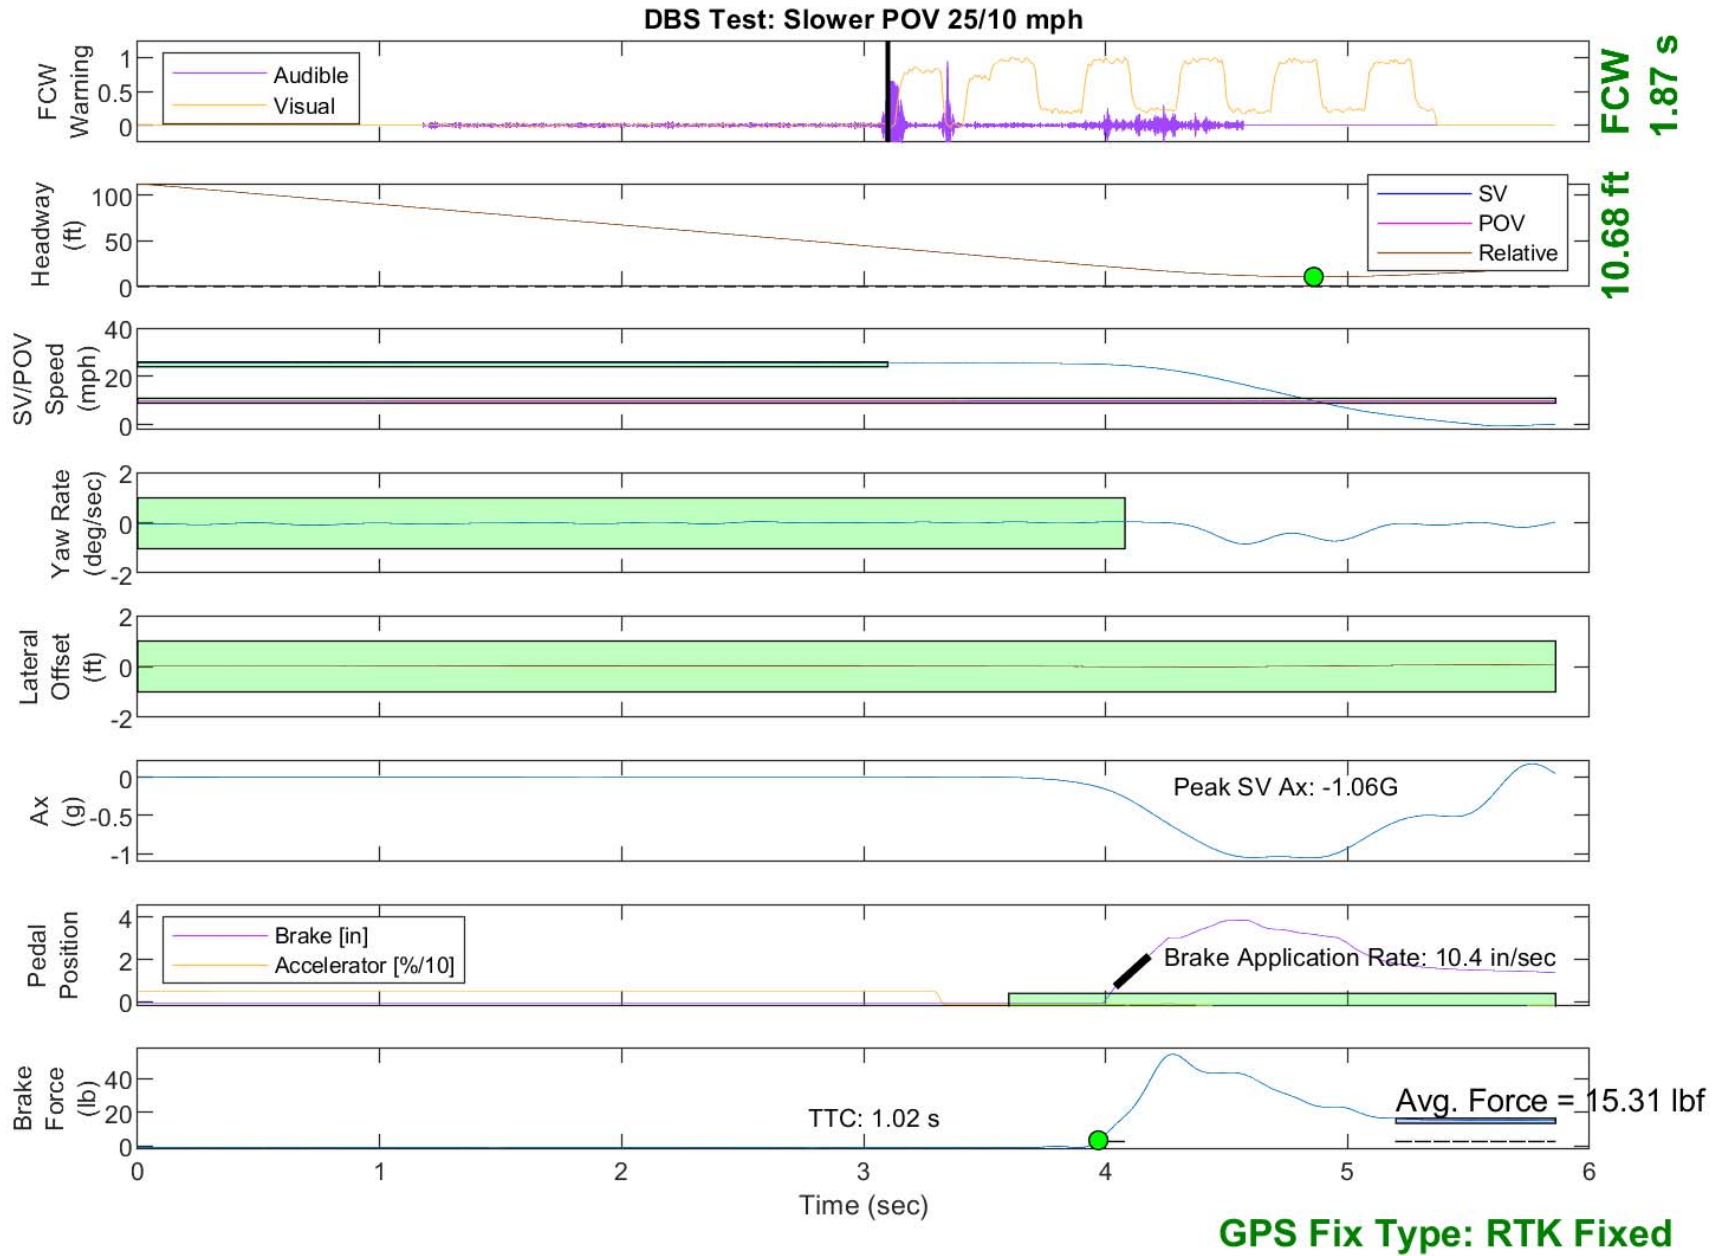


Figure E2. Example Time History for Slower POV 25 vs. 10, Passing



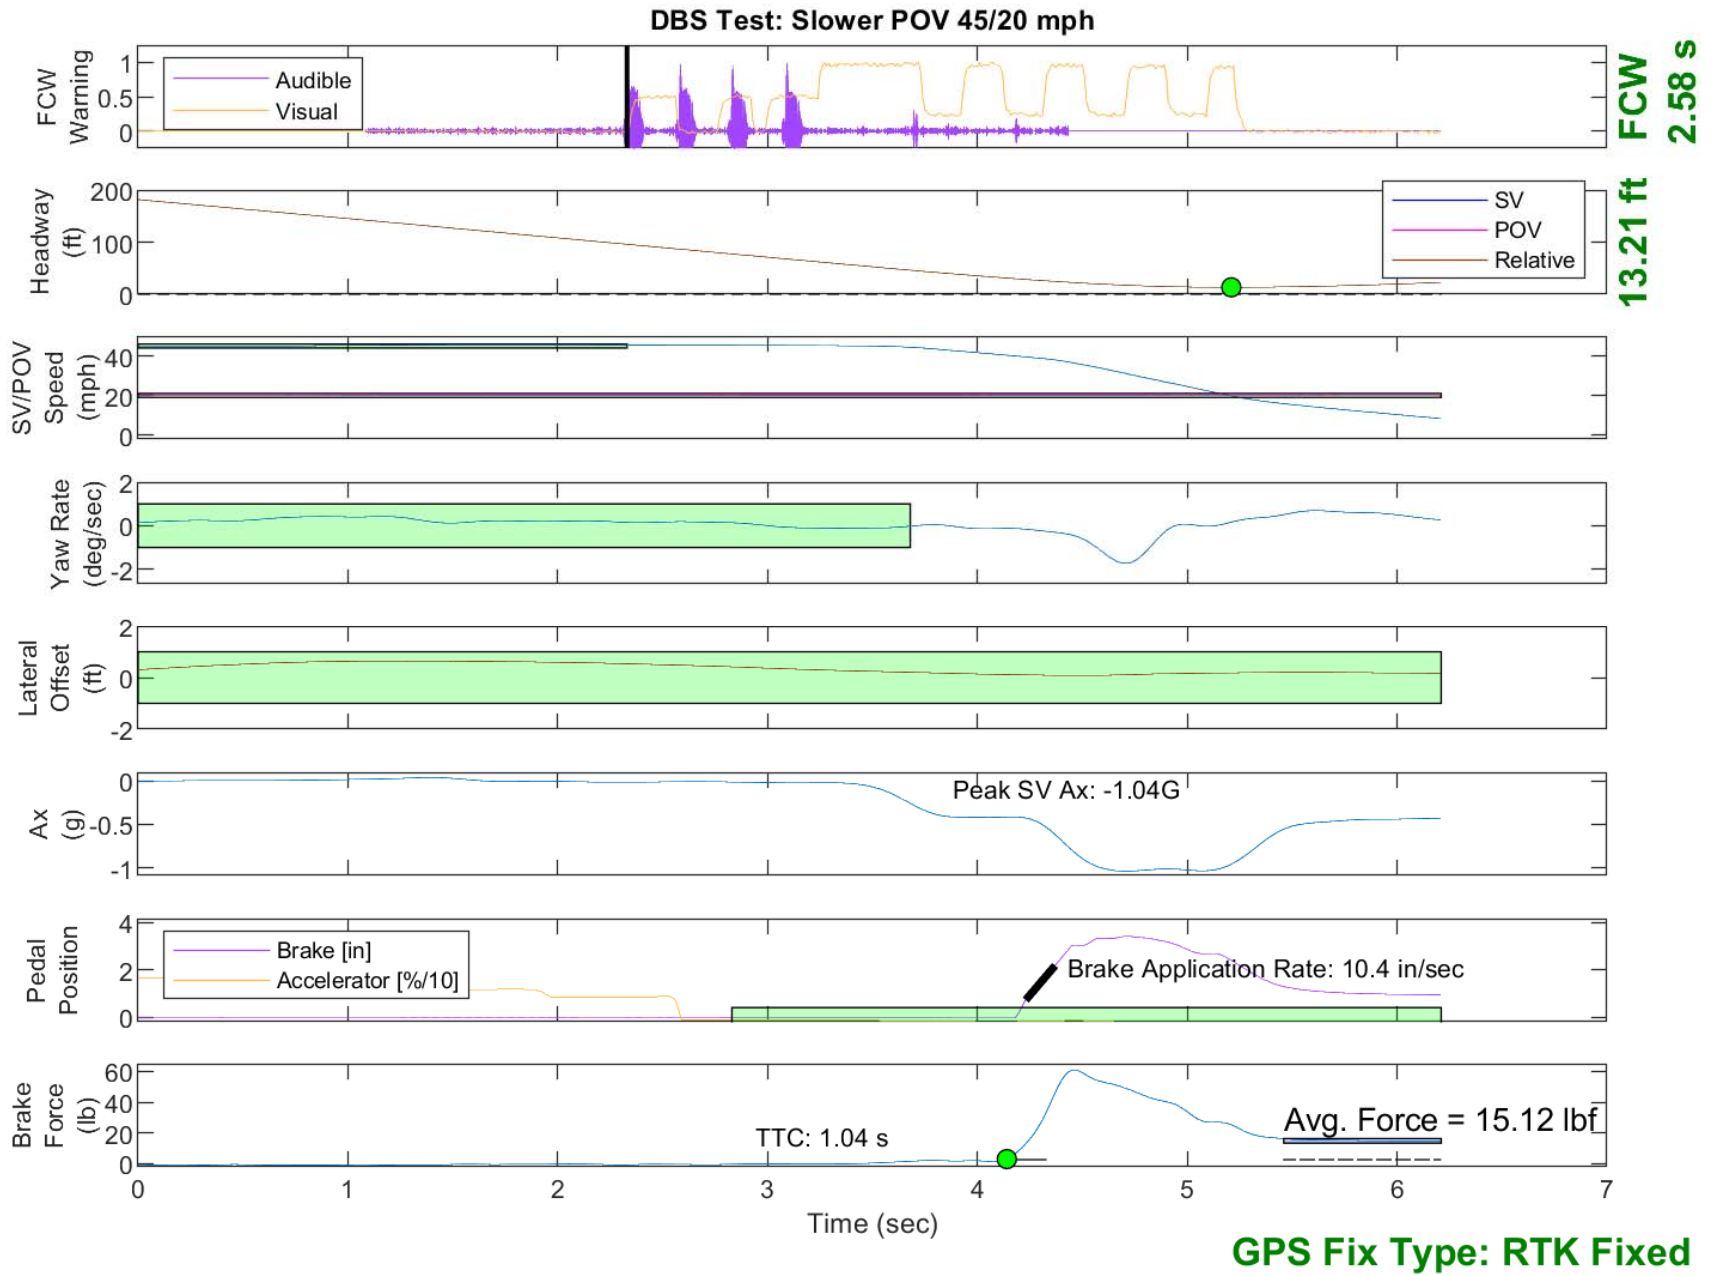


Figure E3. Example Time History for Slower POV 45 vs. 20, Passing



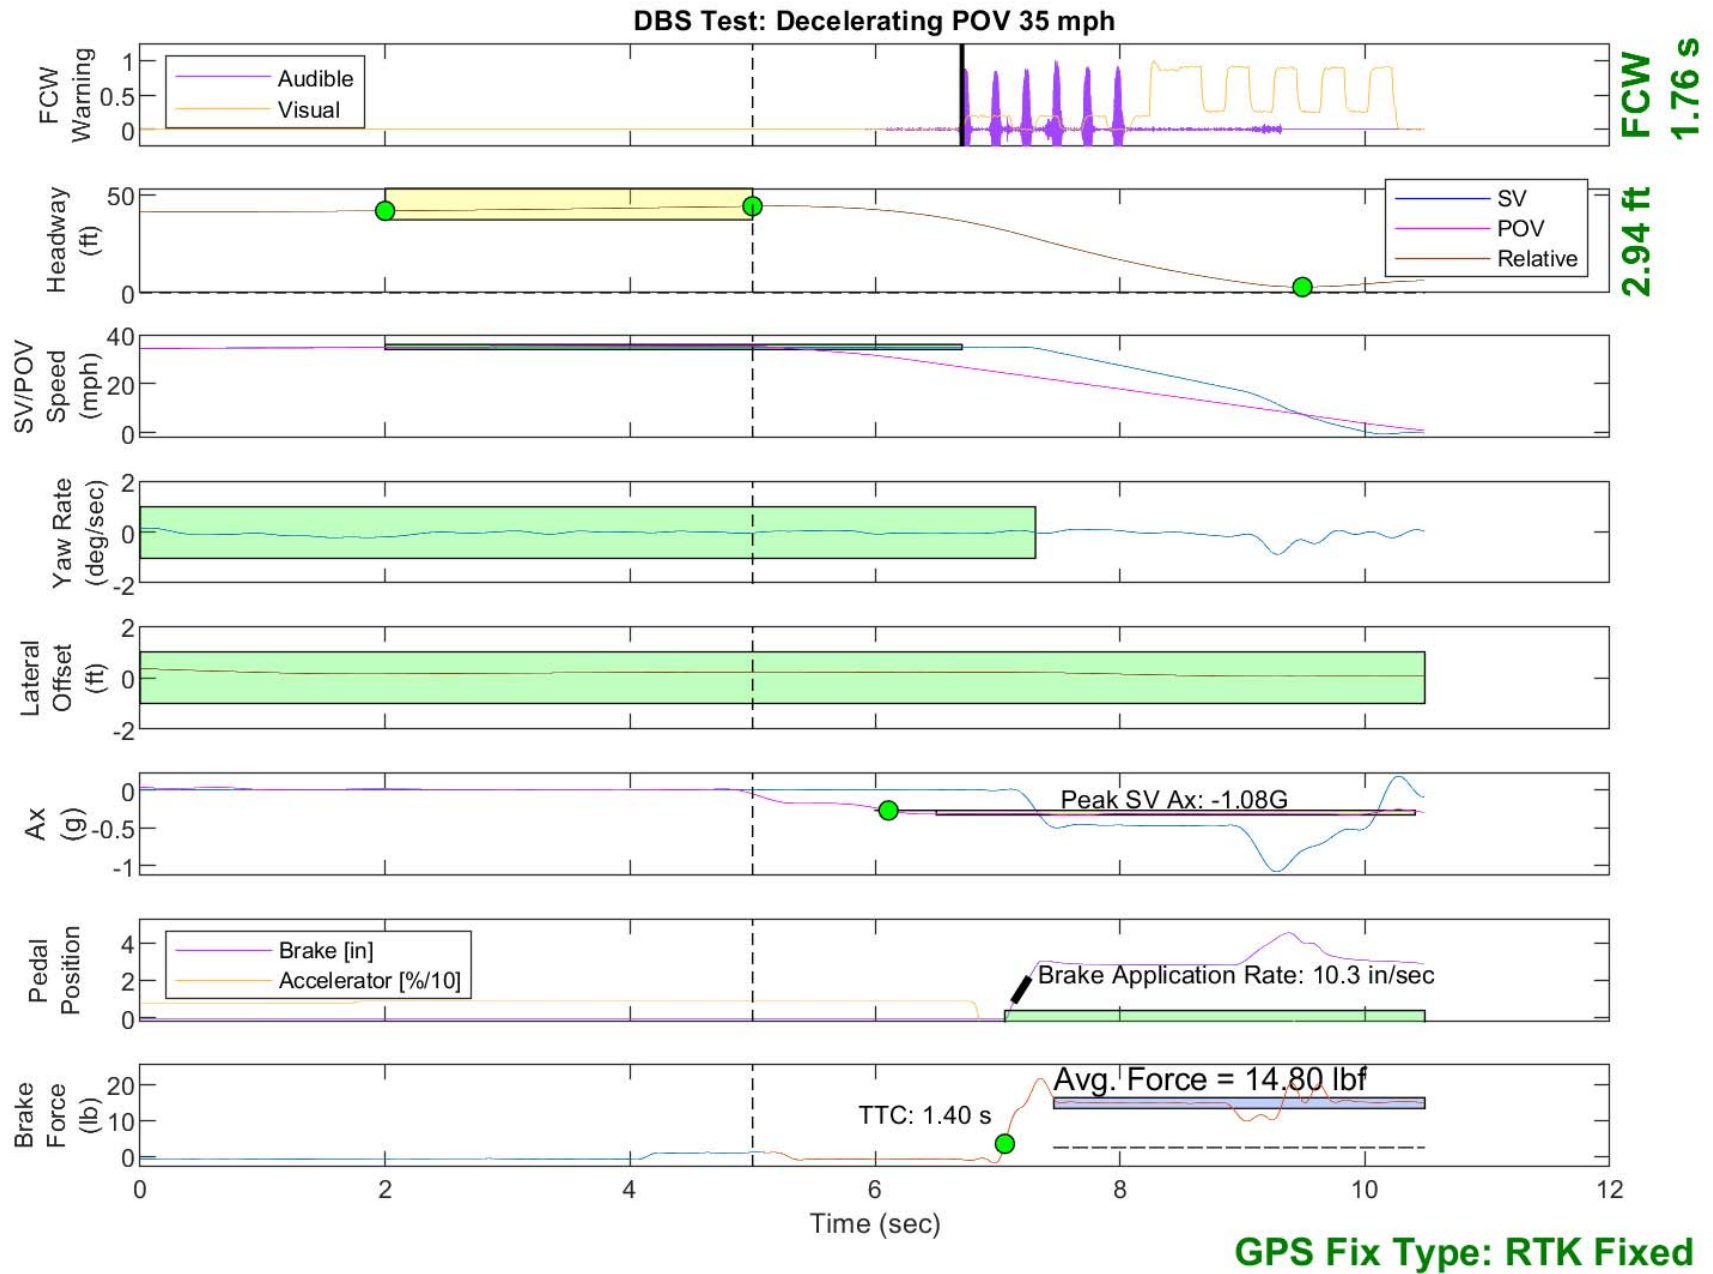


Figure E4. Example Time History for Decelerating POV 35, Passing

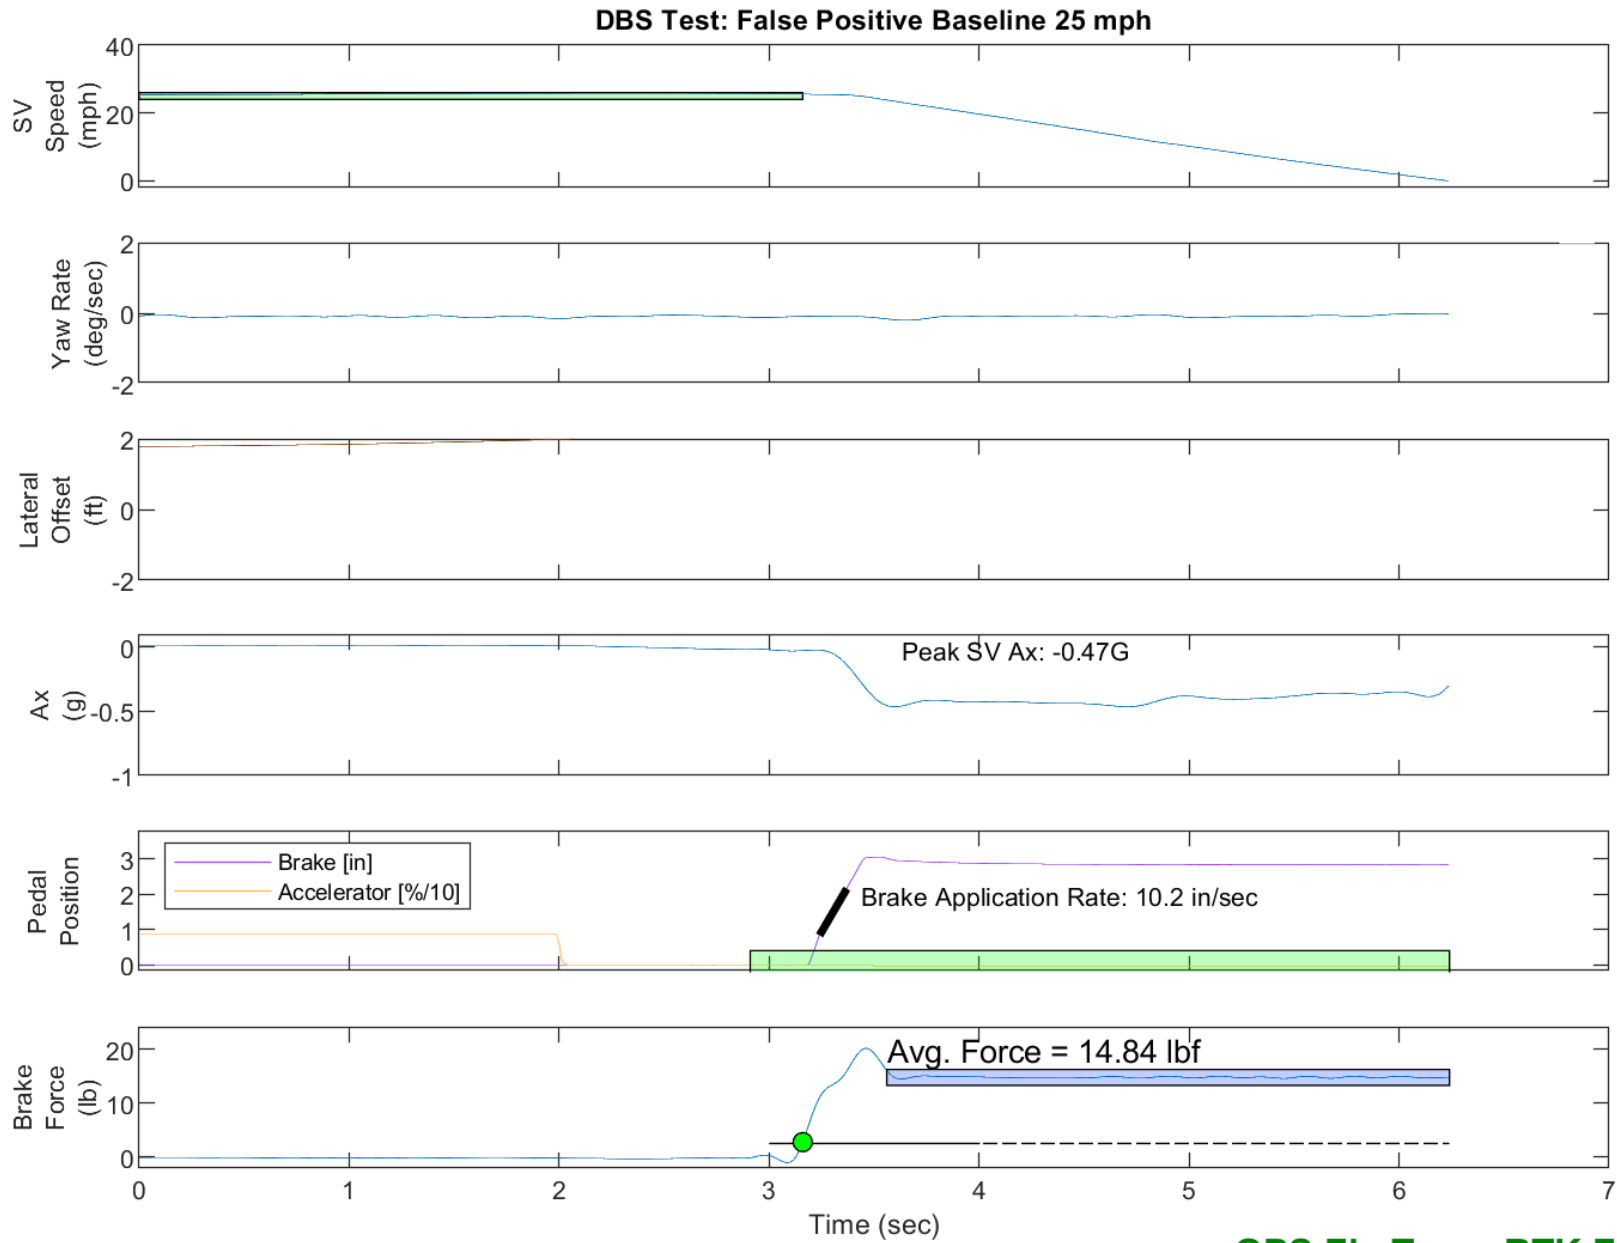

**GPS Fix Type: RTK Fixed**

Figure E5. Example Time History for False Positive Baseline 25

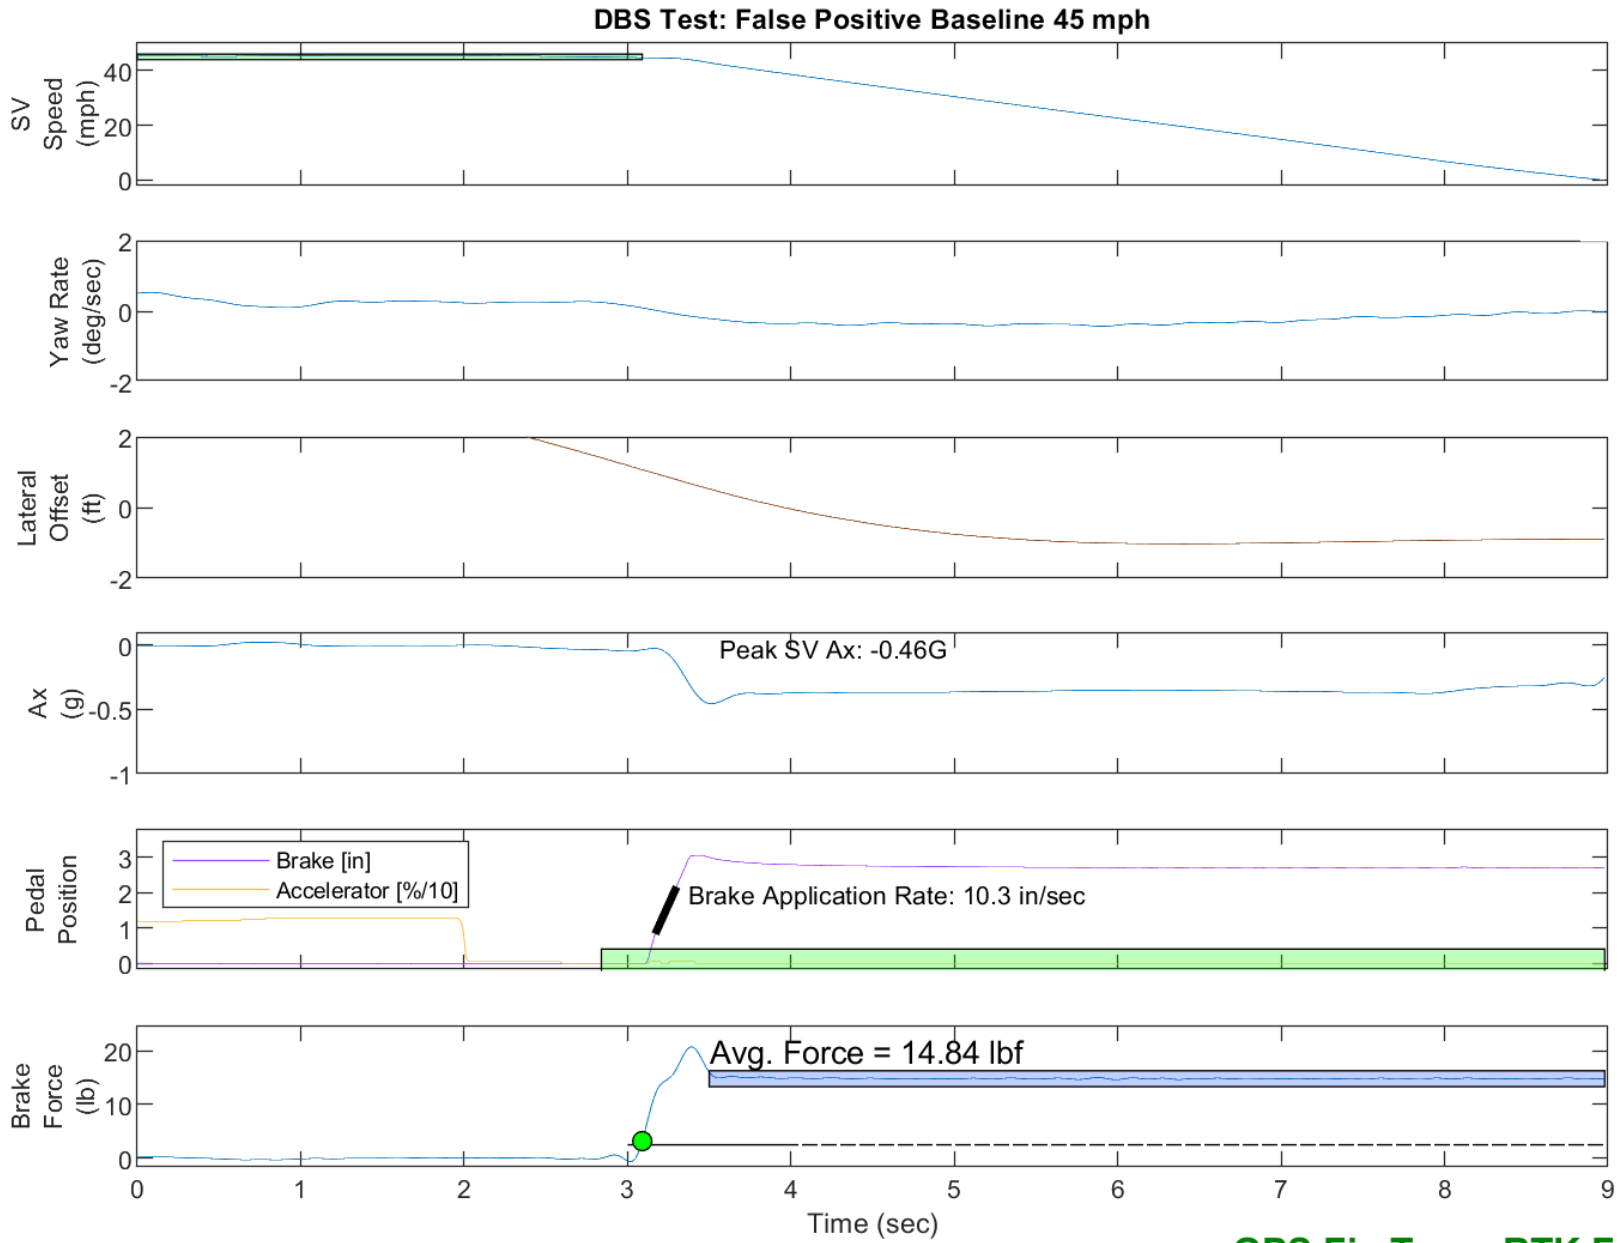

**GPS Fix Type: RTK Fixed**

Figure E6. Example Time History for False Positive Baseline 45


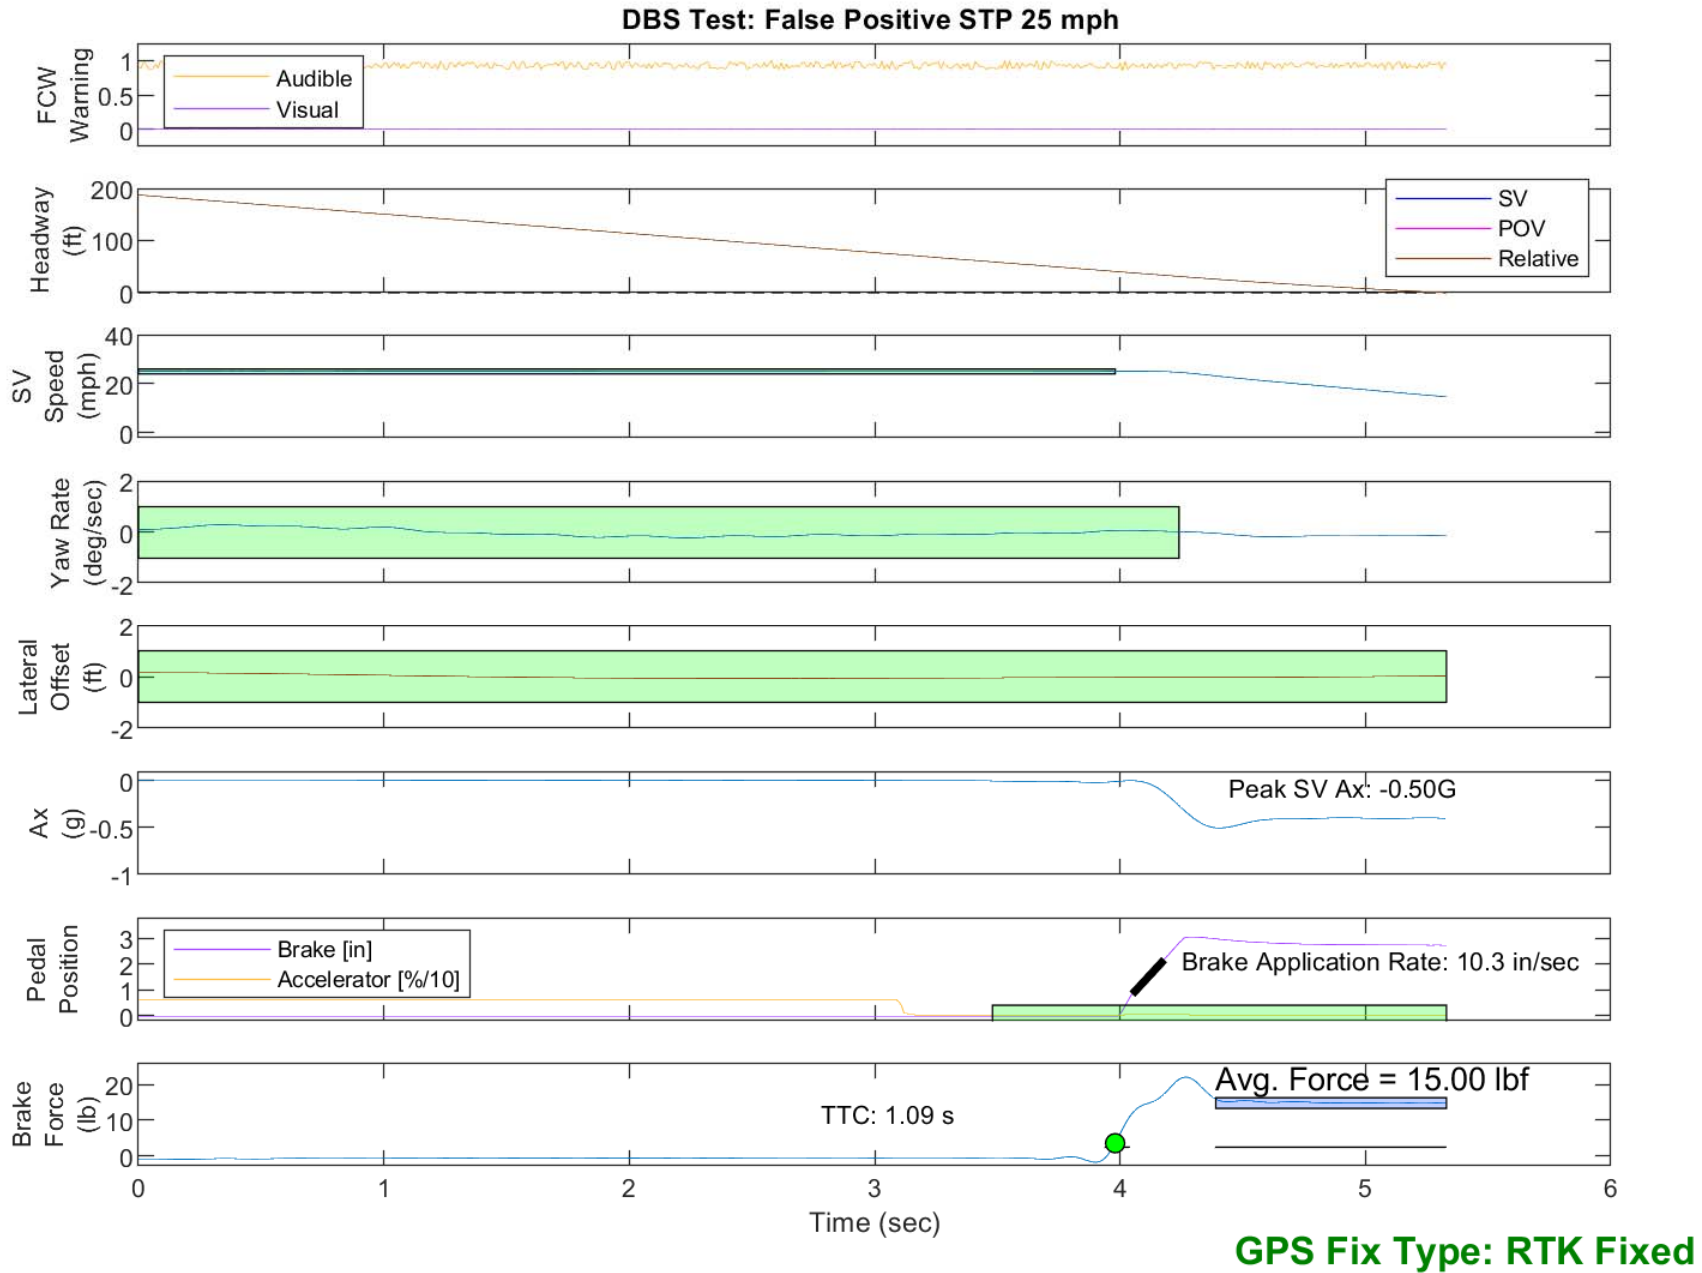


Figure E7. Example Time History for False Positive Steel Plate 25, Passing

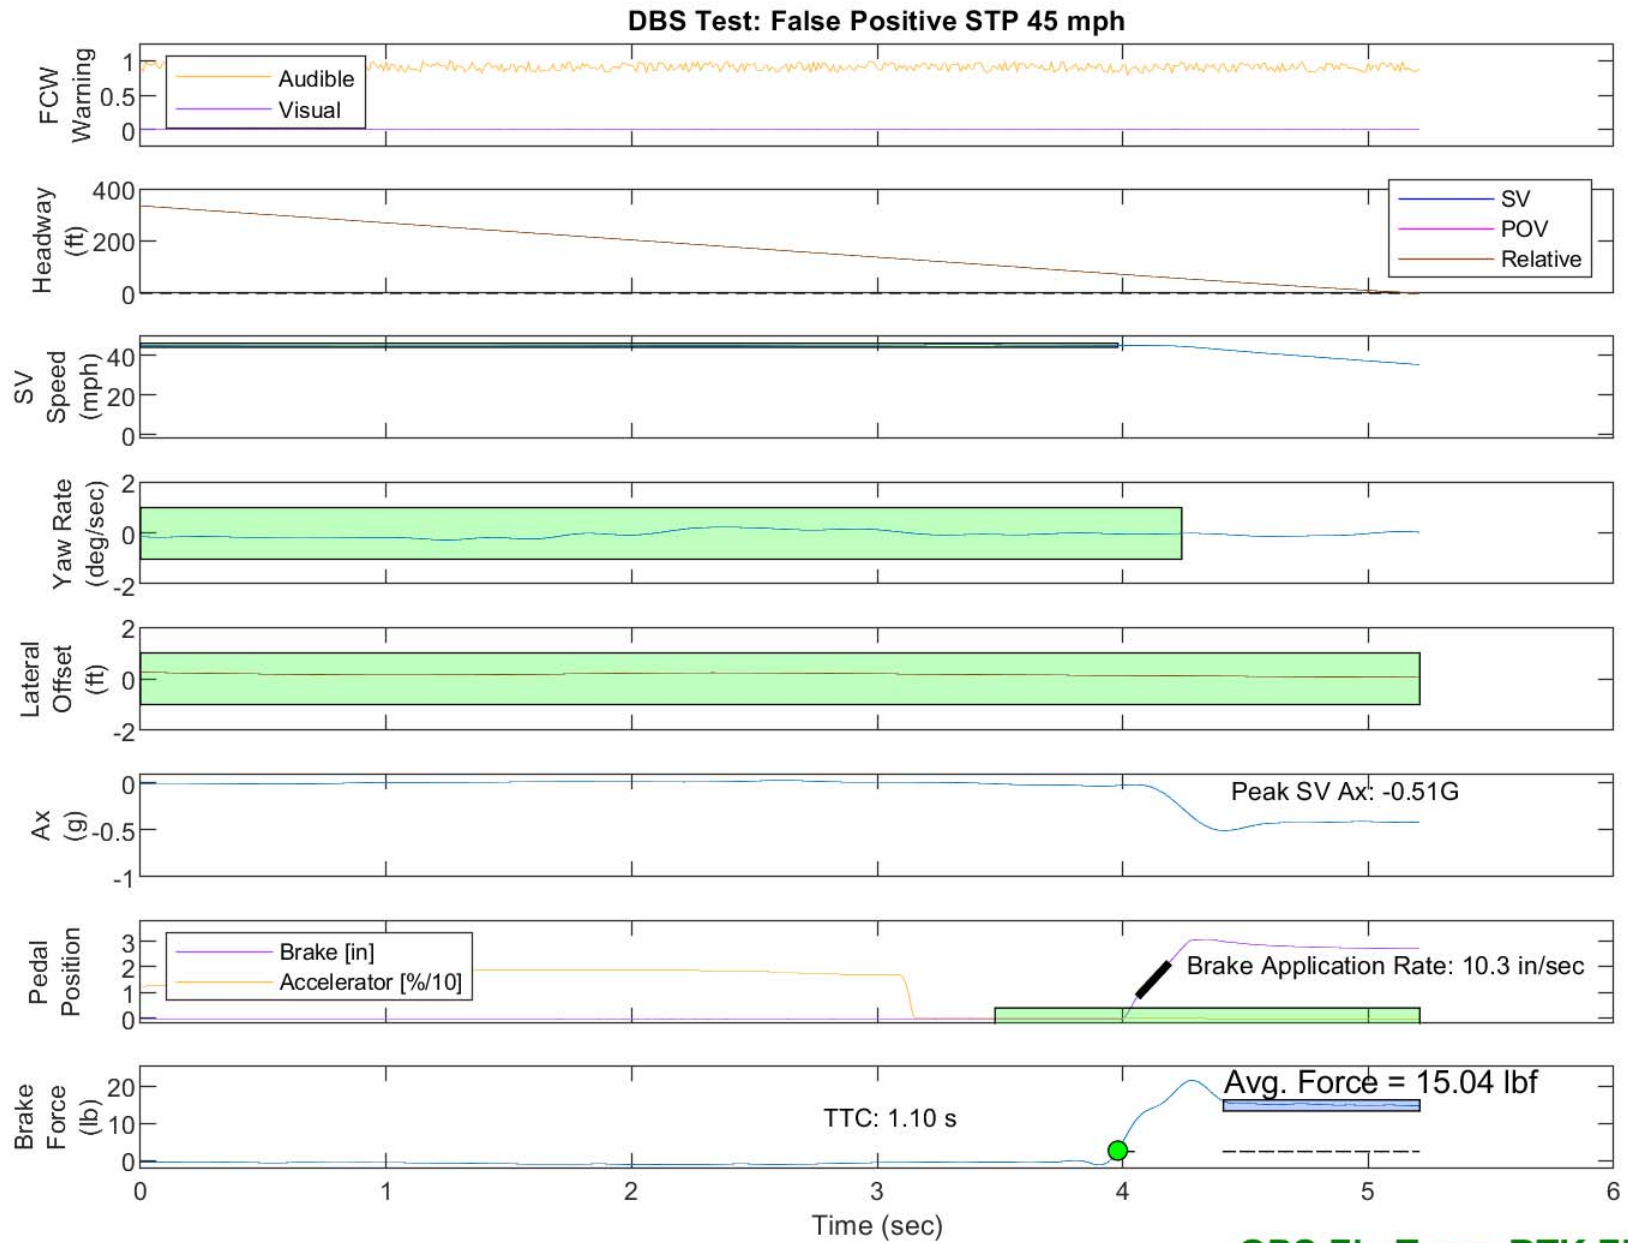

**GPS Fix Type: RTK Fixed**

Figure E8. Example Time History for False Positive Steel Plate 45, Passing

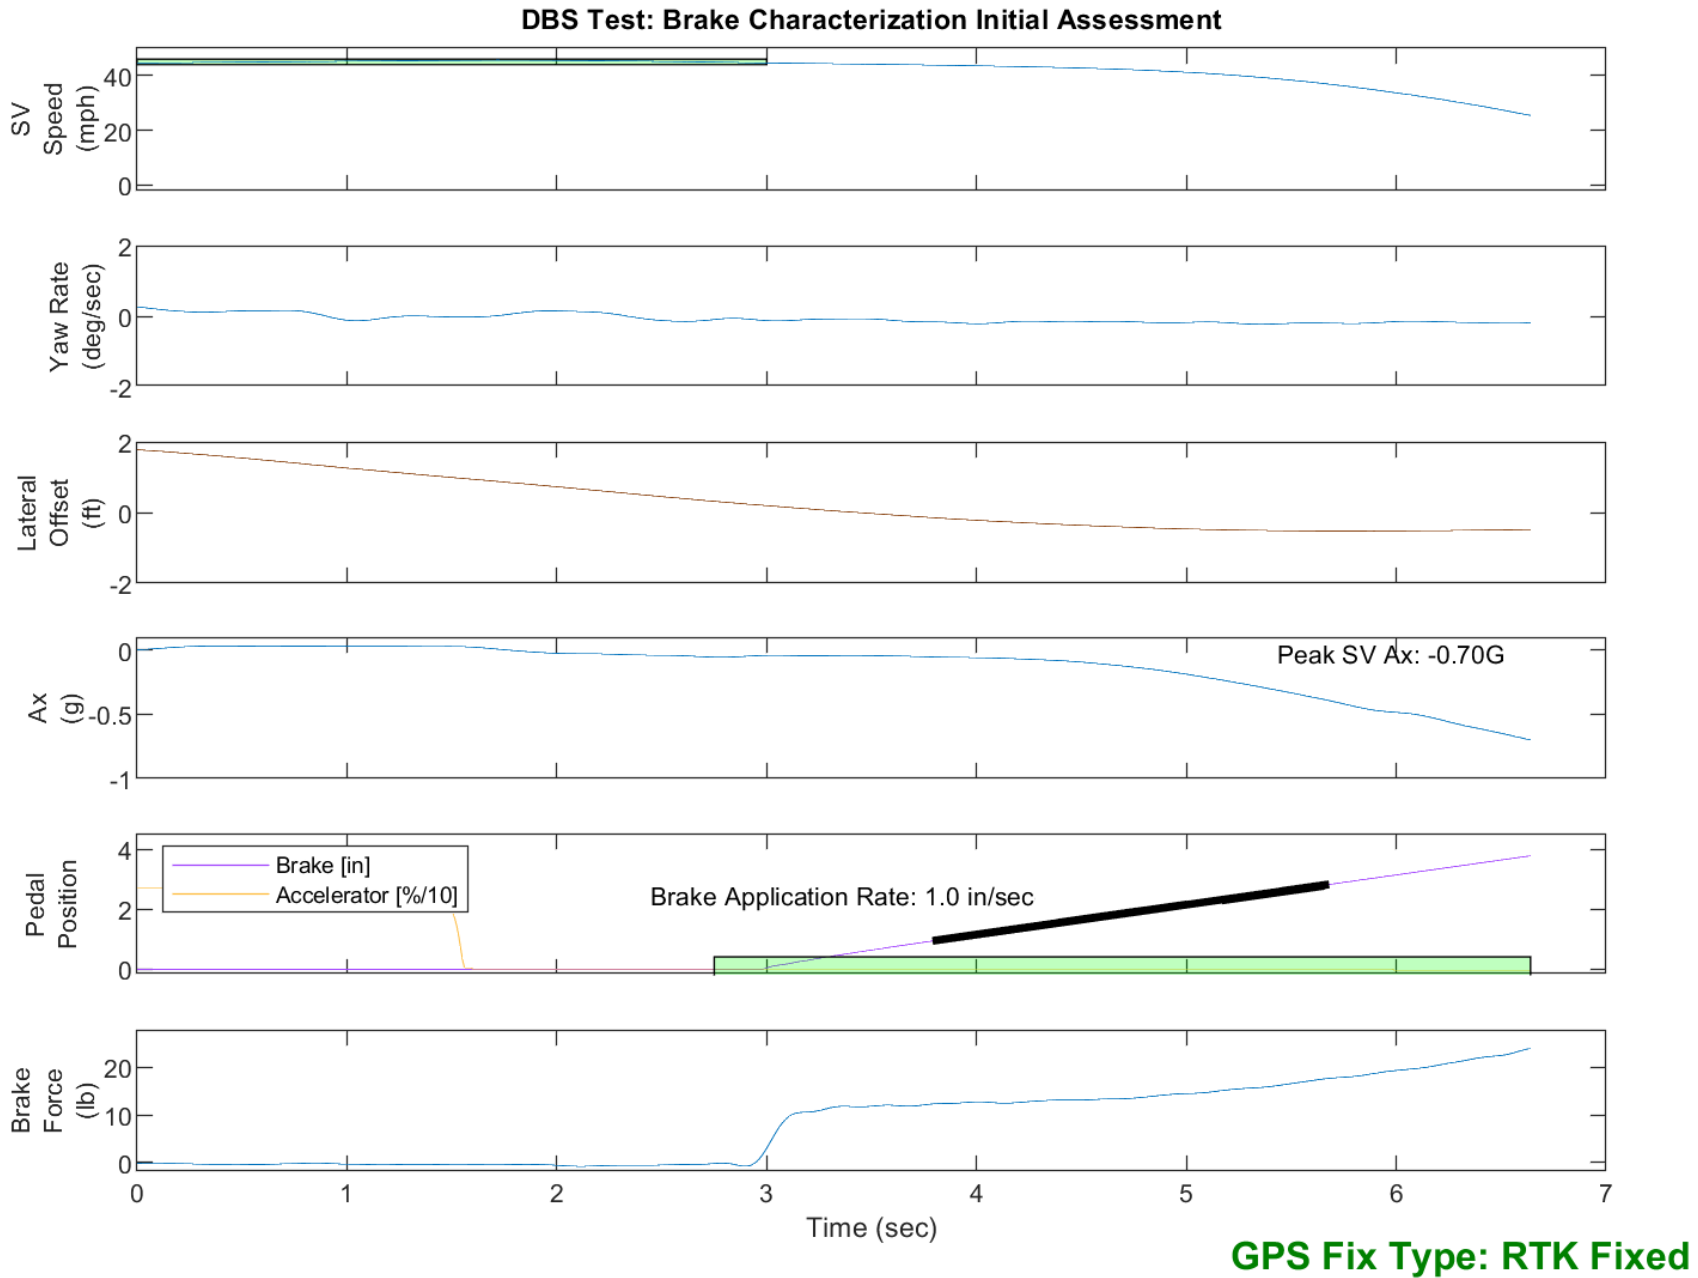


Figure E9. Example Time History for DBS Brake Characterization, Passing


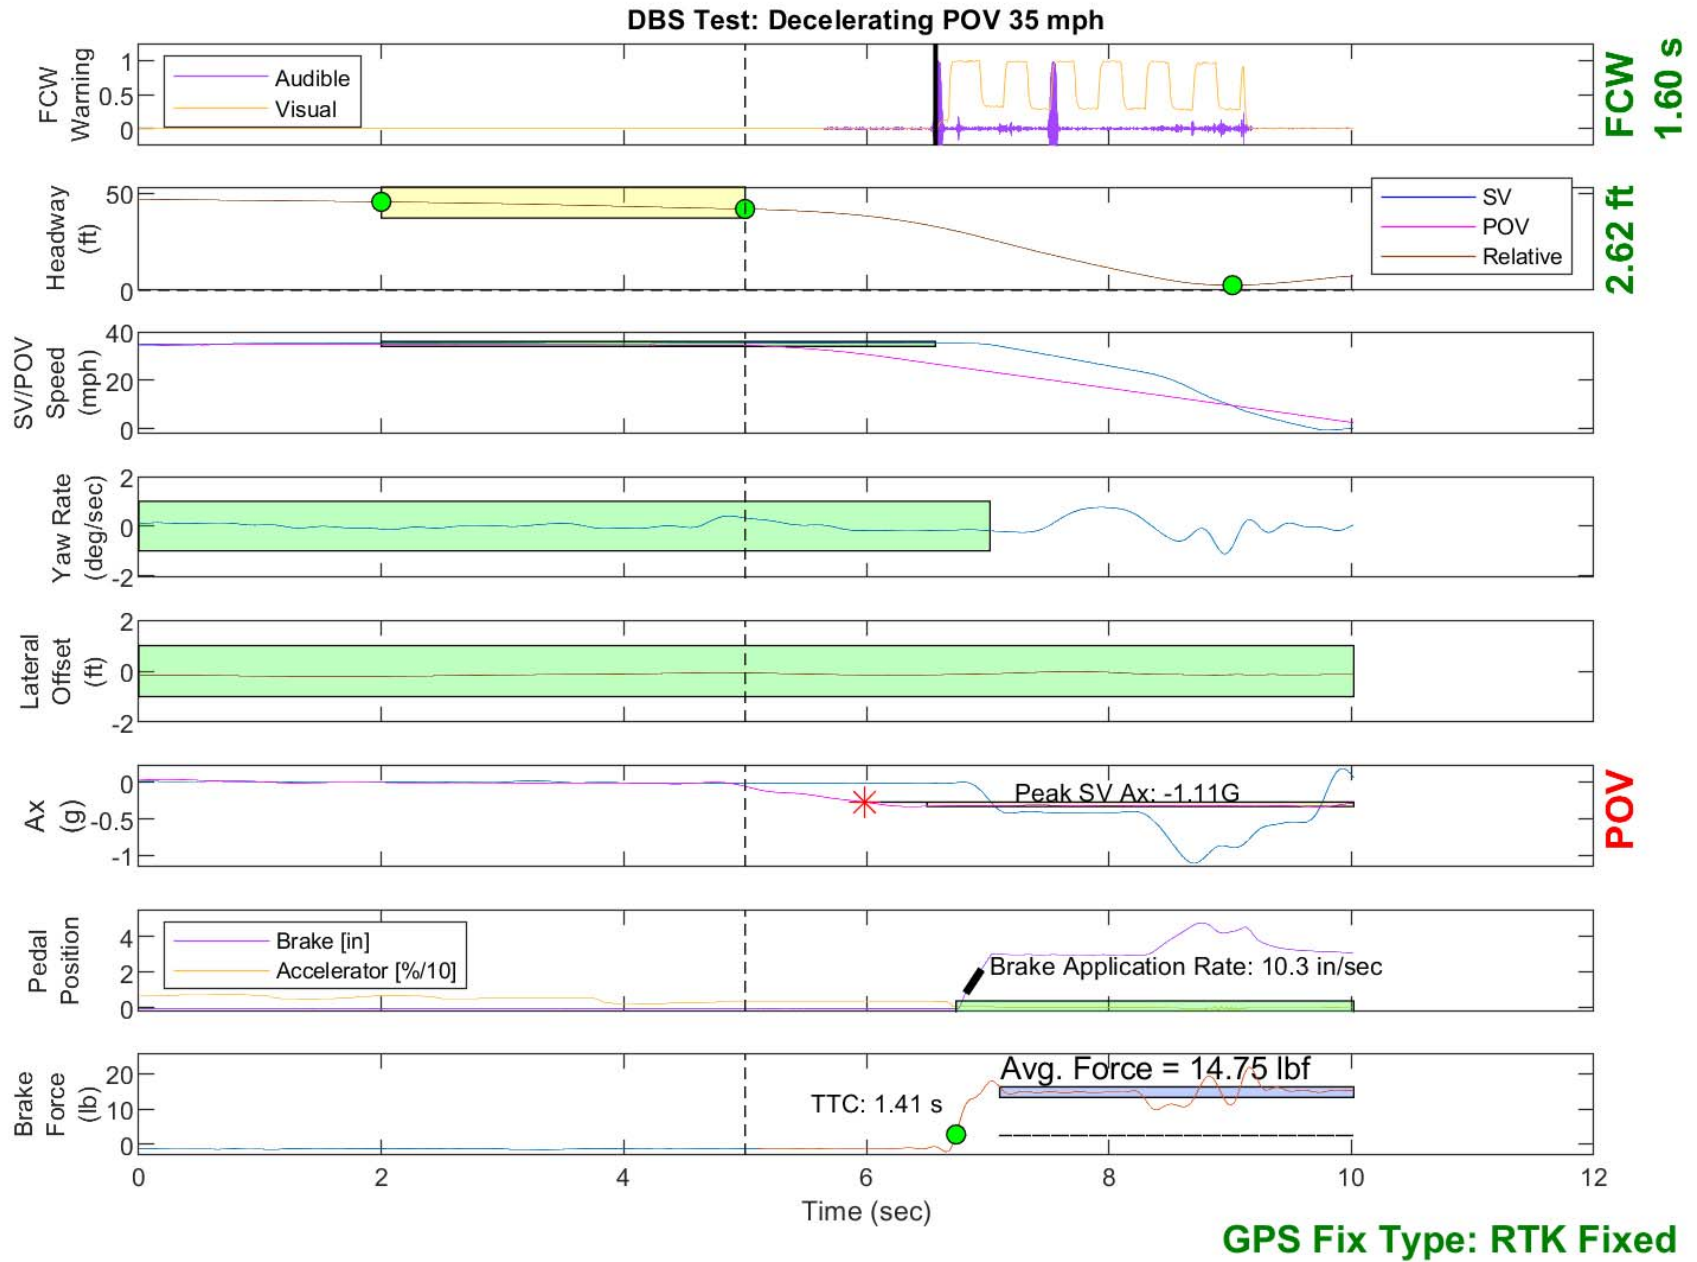


Figure E10. Example Time History Displaying Invalid POV Acceleration Criteria



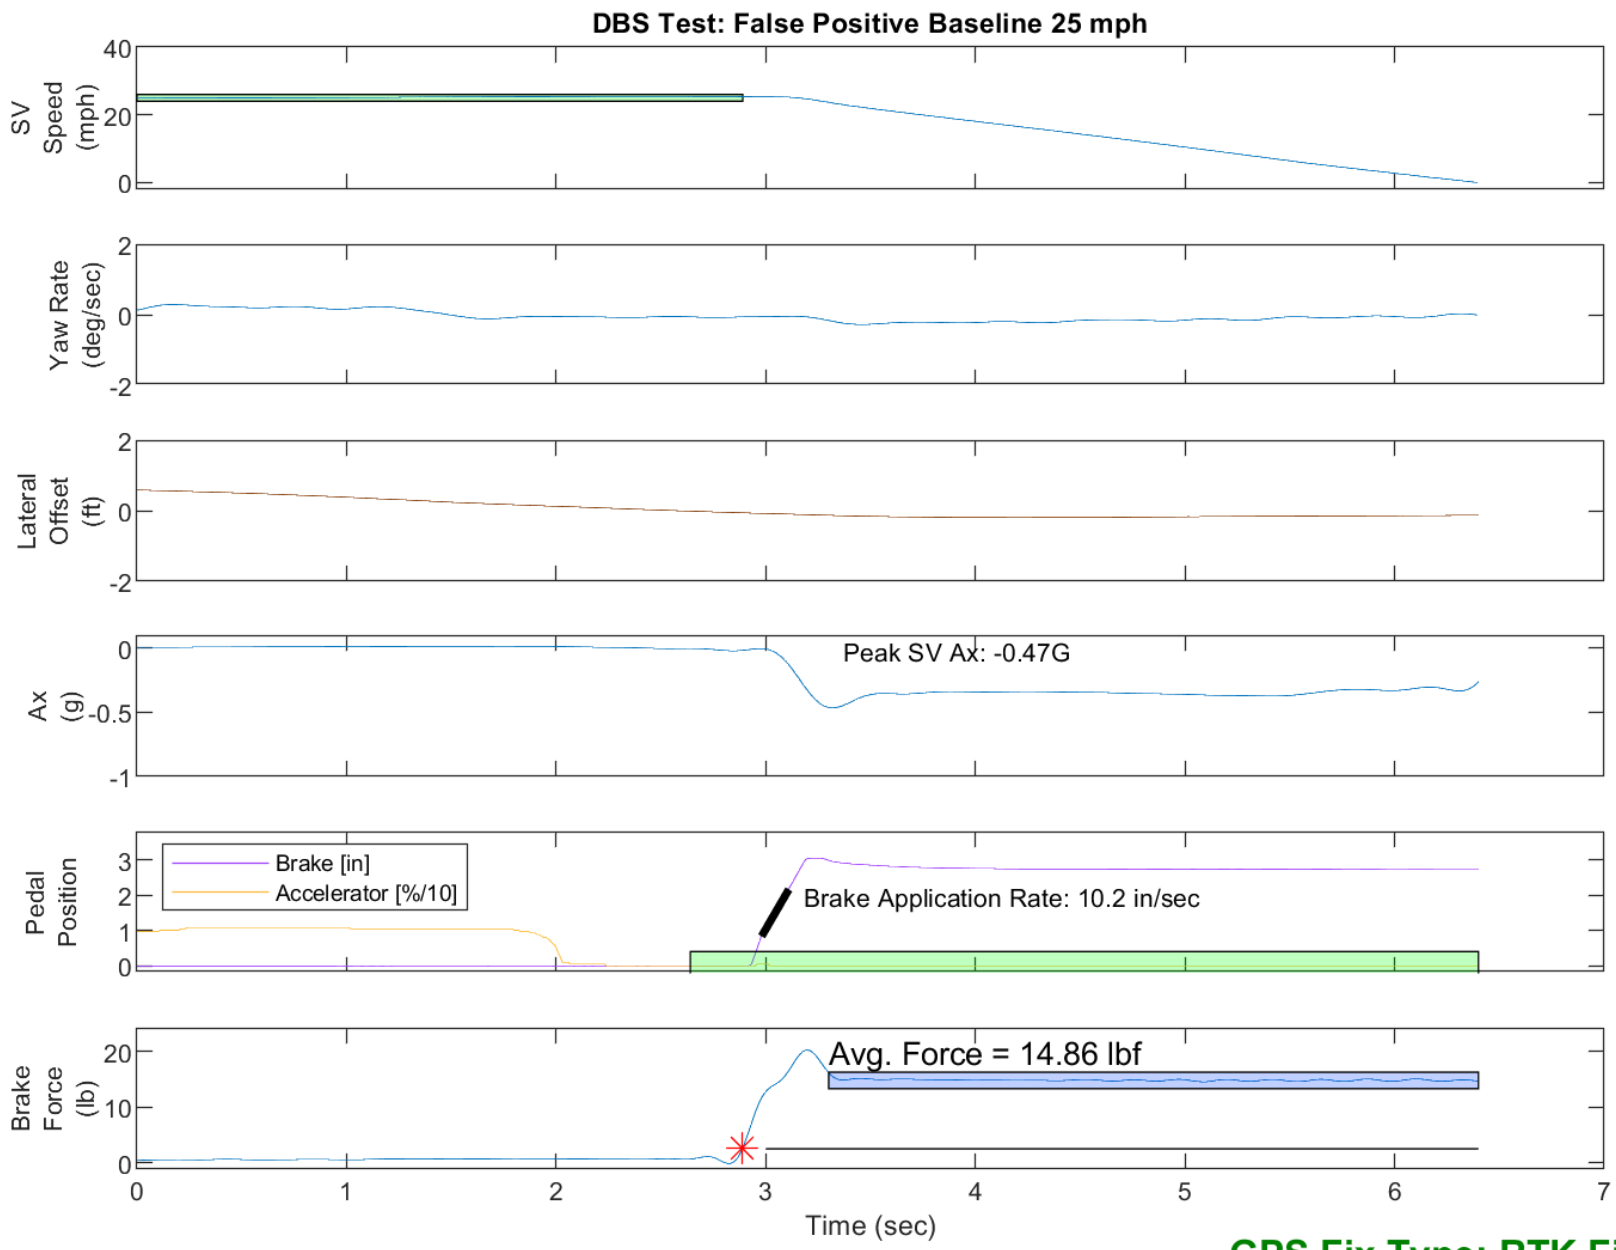

**GPS Fix Type: RTK Fixed**

Figure E11. Example Time History Displaying Invalid Brake Force Criteria

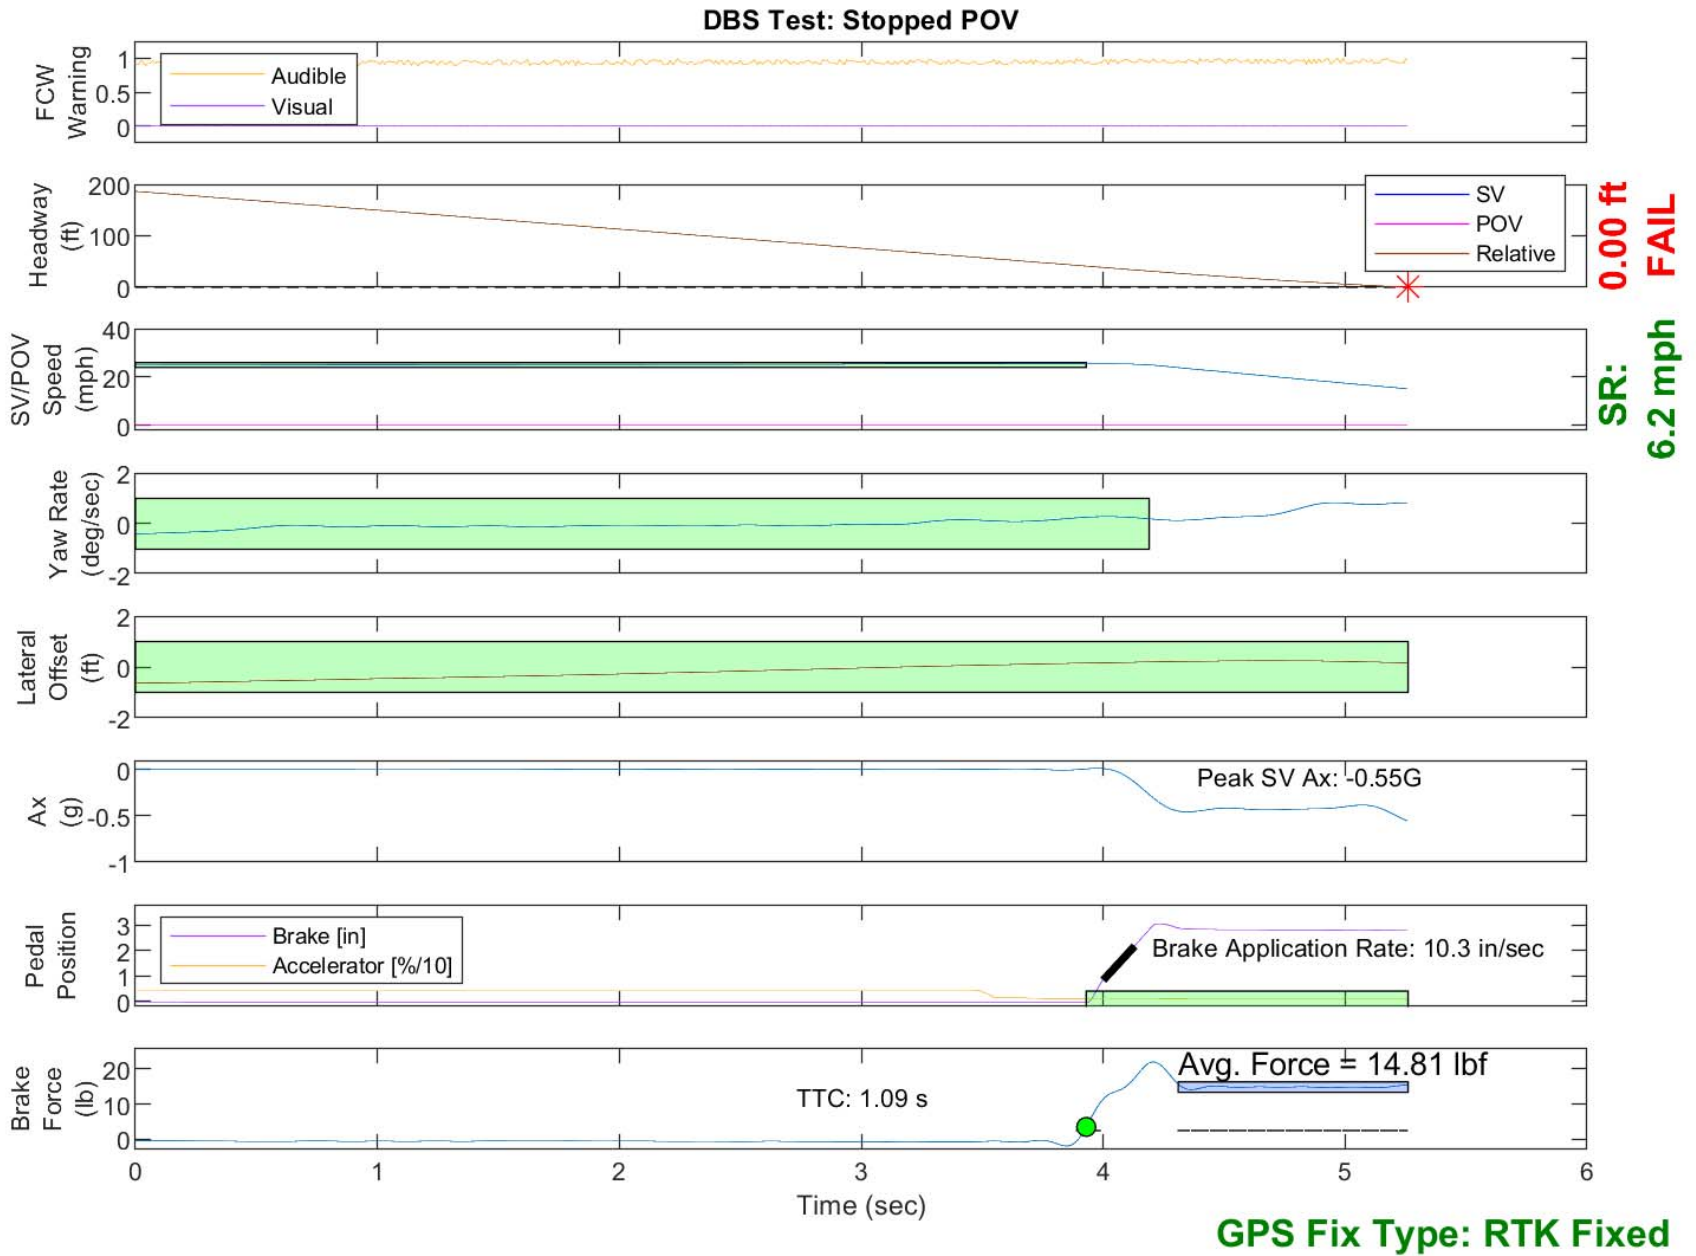


Figure E12. Example Time History for a Failed Run

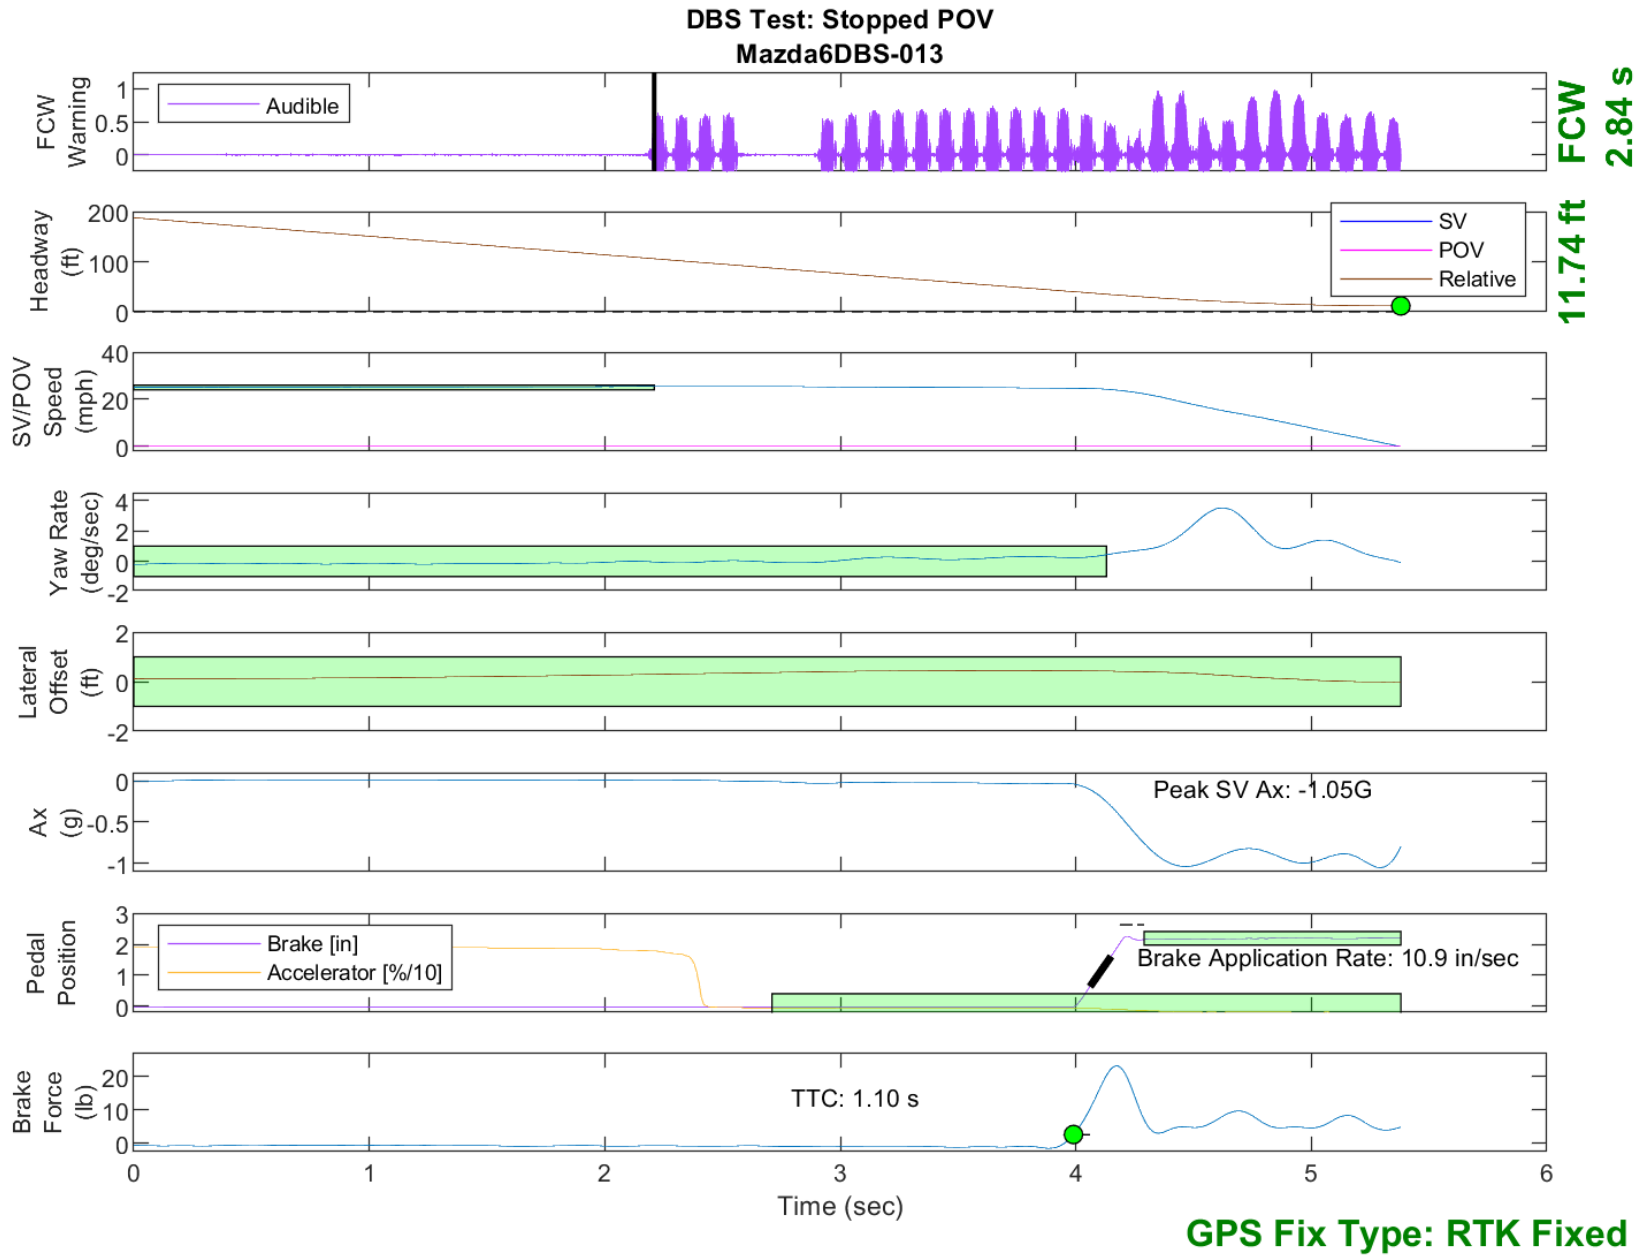


Figure E13. Time History for DBS Run 13, SV Encounters Stopped POV

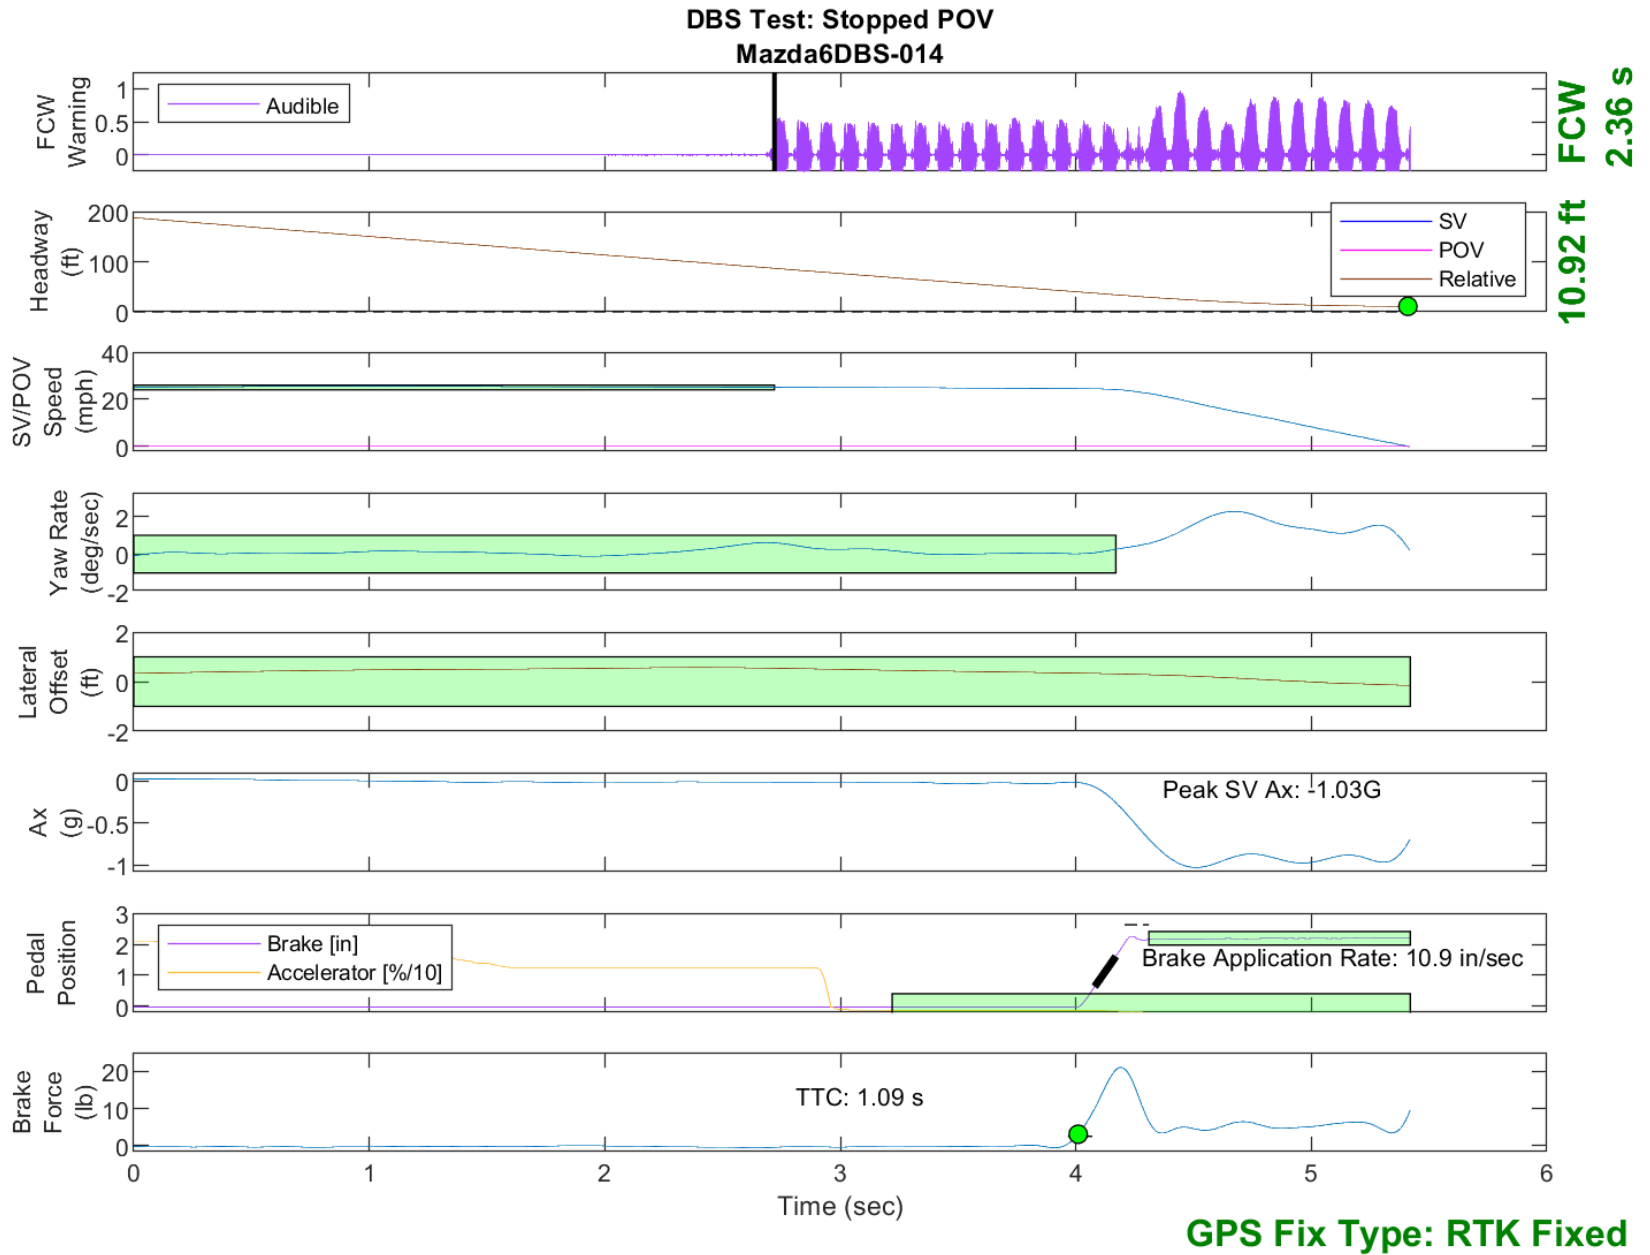


Figure E14. Time History for DBS Run 14, SV Encounters Stopped POV

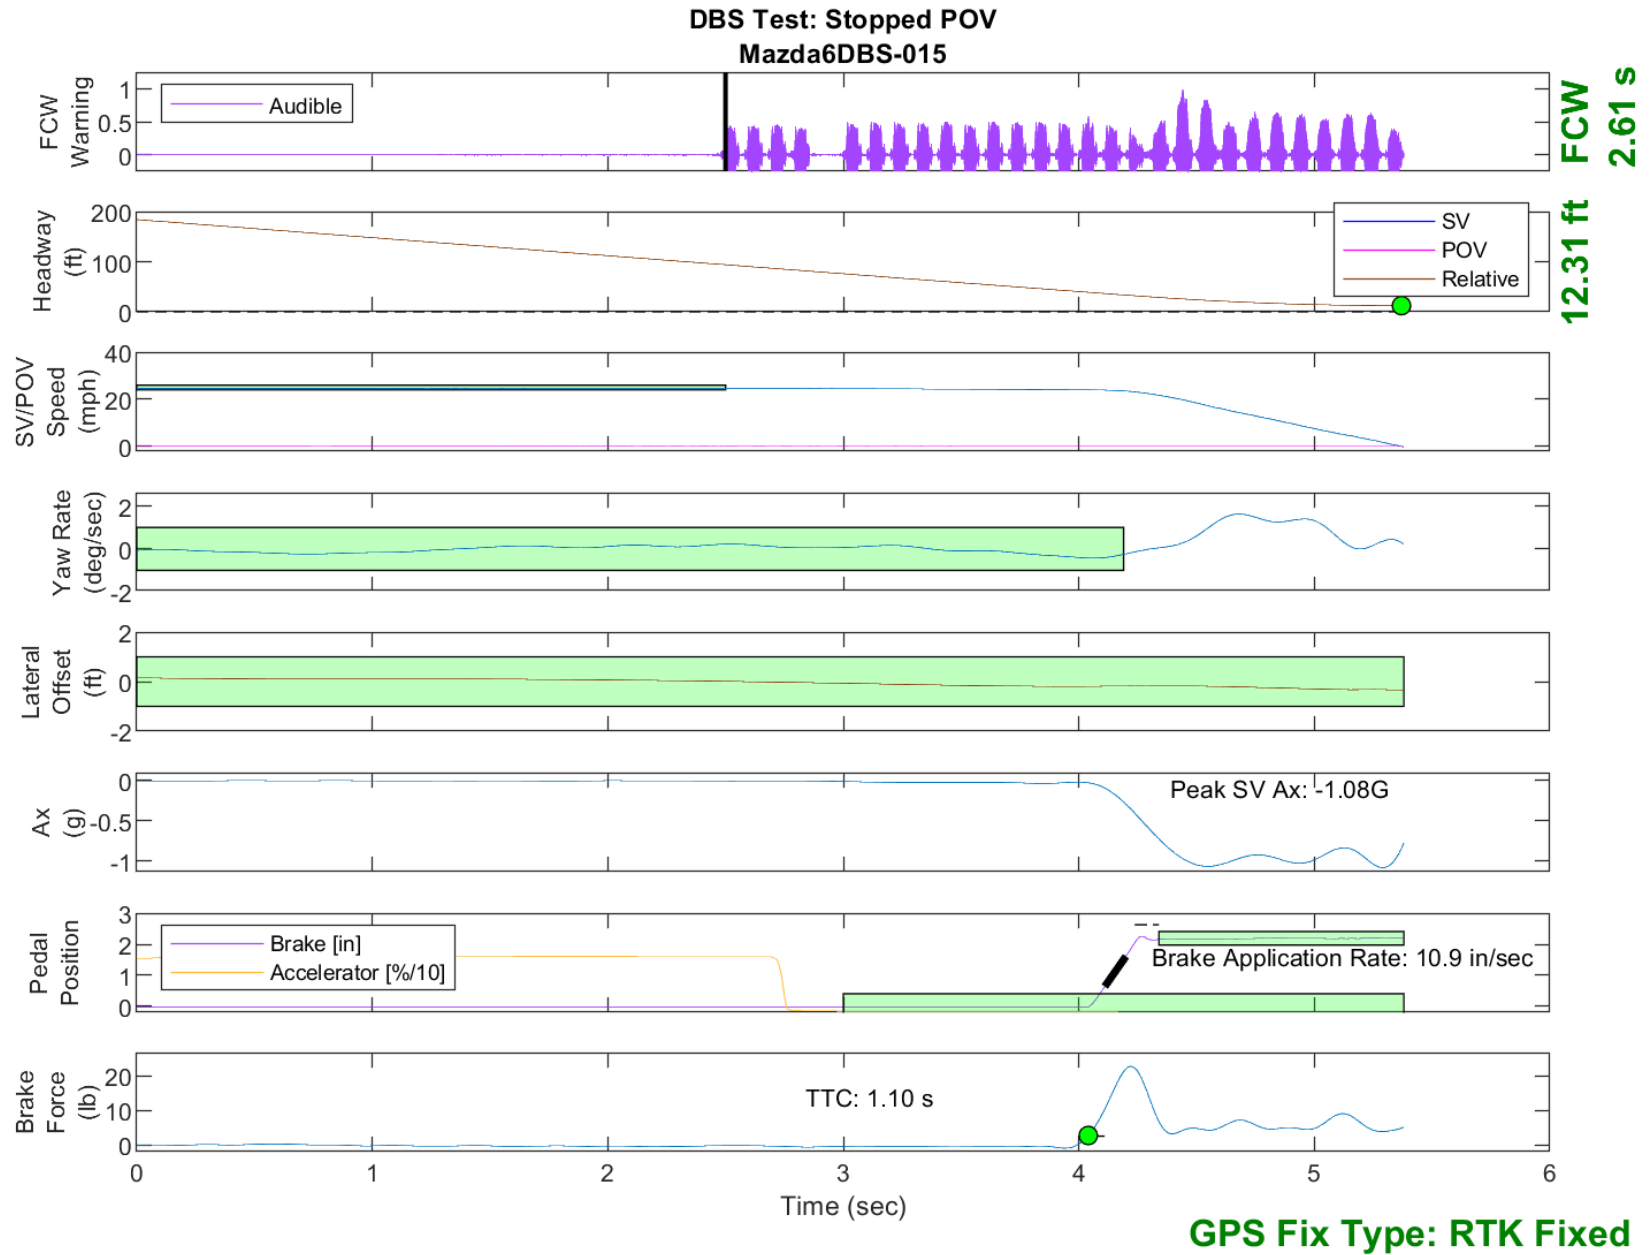


Figure E15. Time History for DBS Run 15, SV Encounters Stopped POV

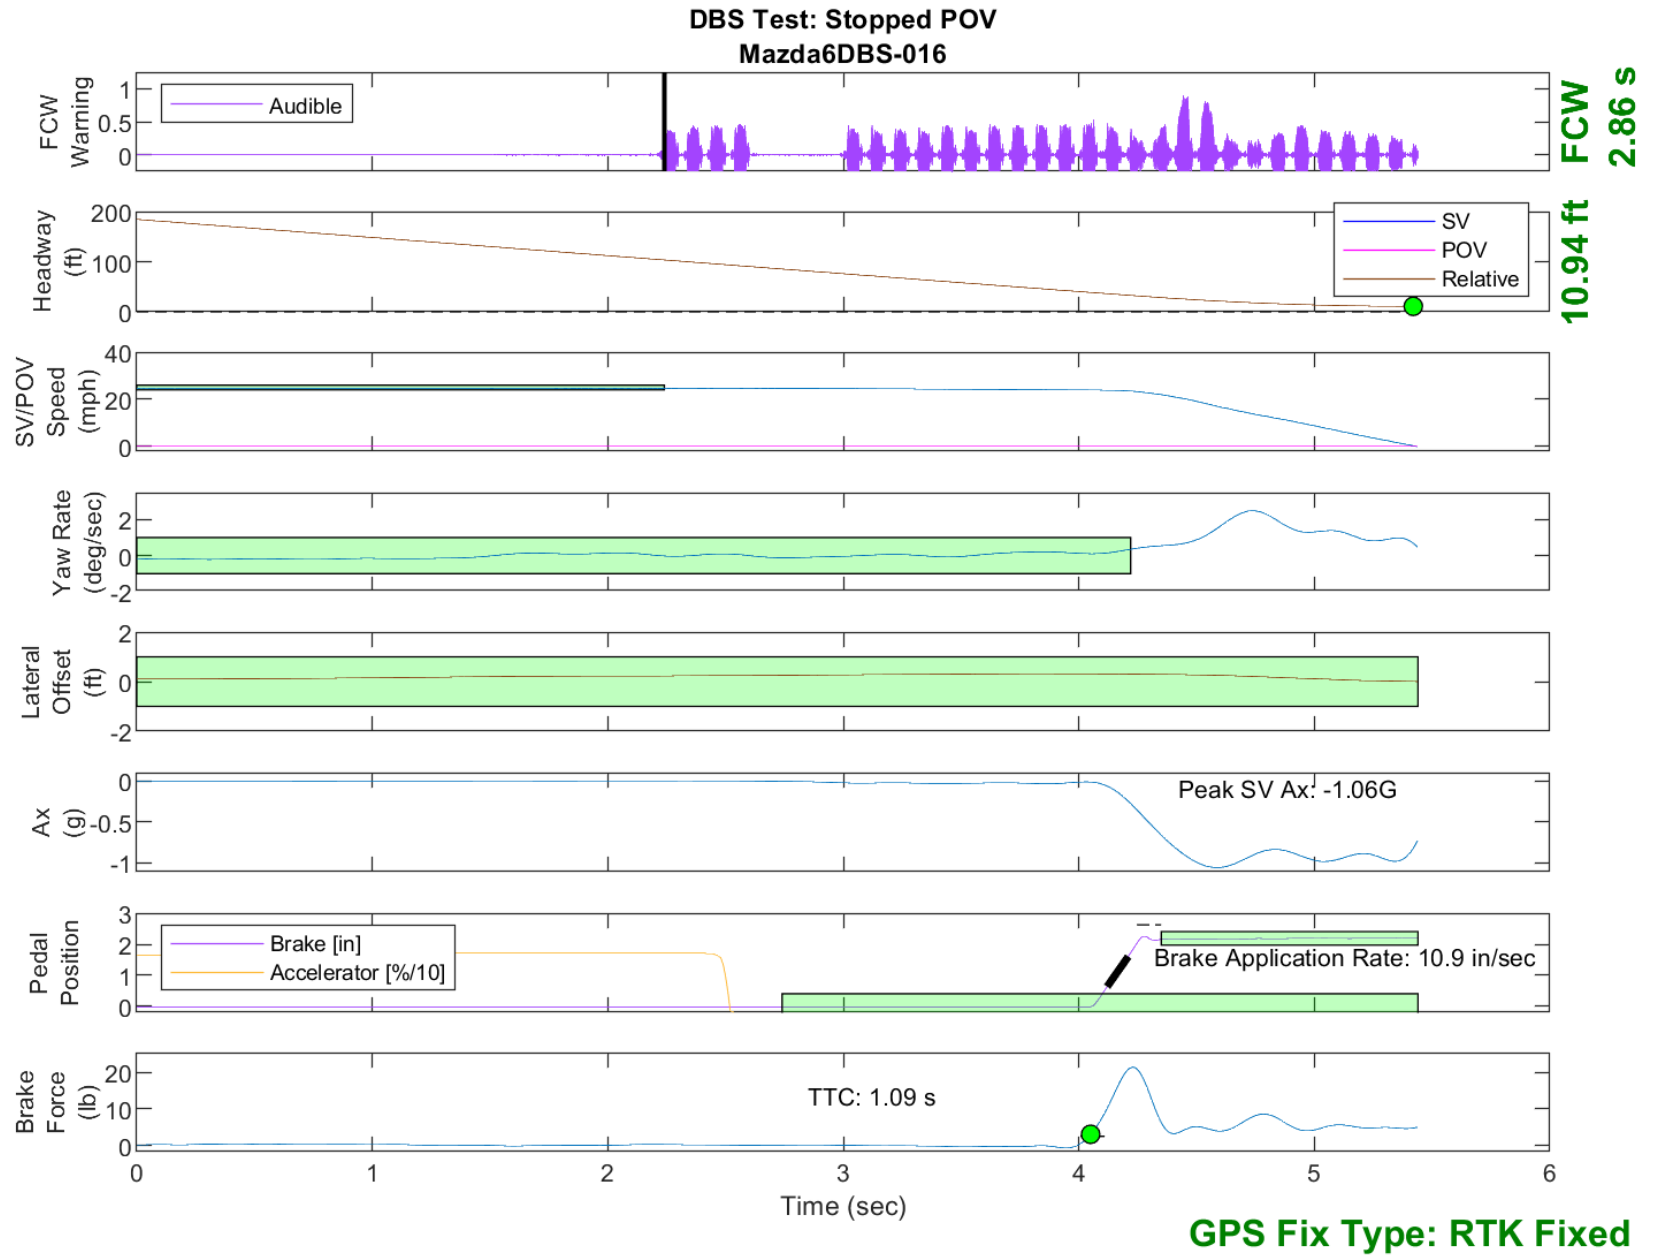


Figure E16. Time History for DBS Run 16, SV Encounters Stopped POV

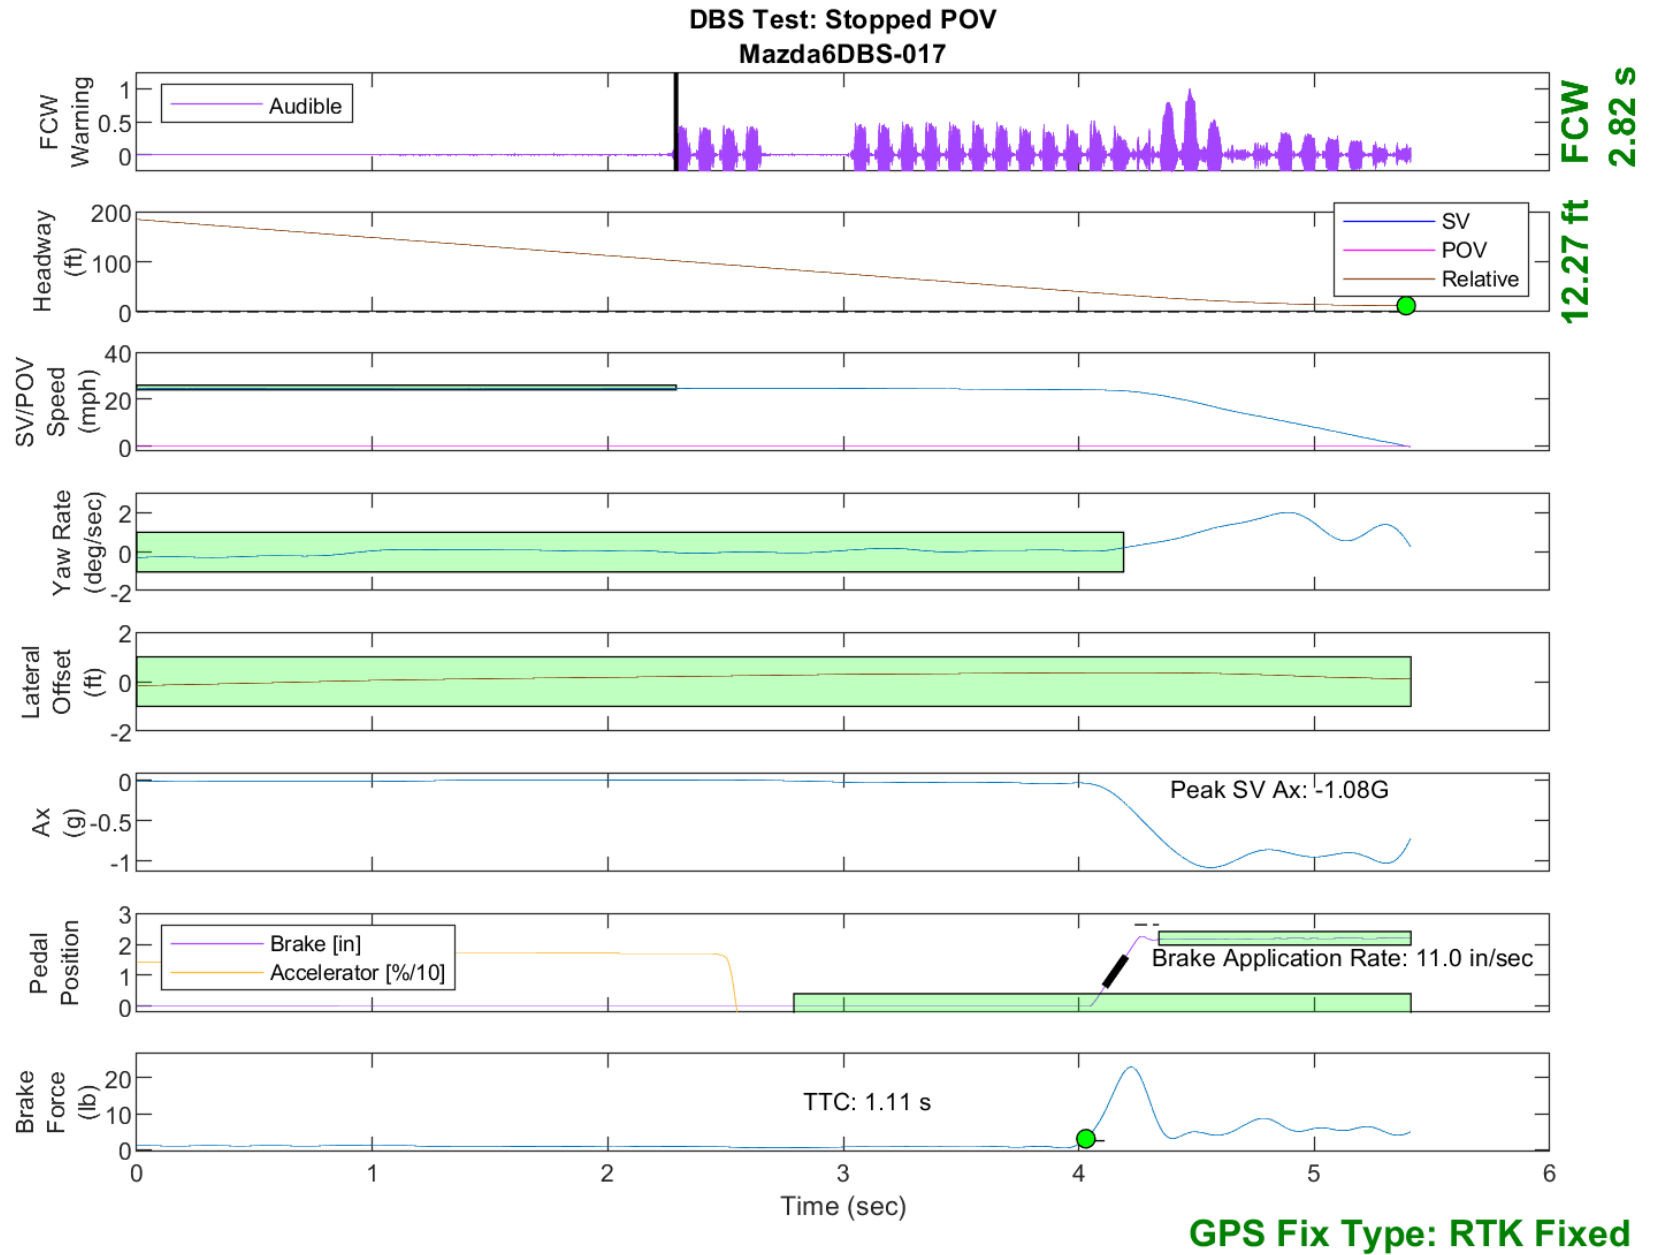


Figure E17. Time History for DBS Run 17, SV Encounters Stopped POV

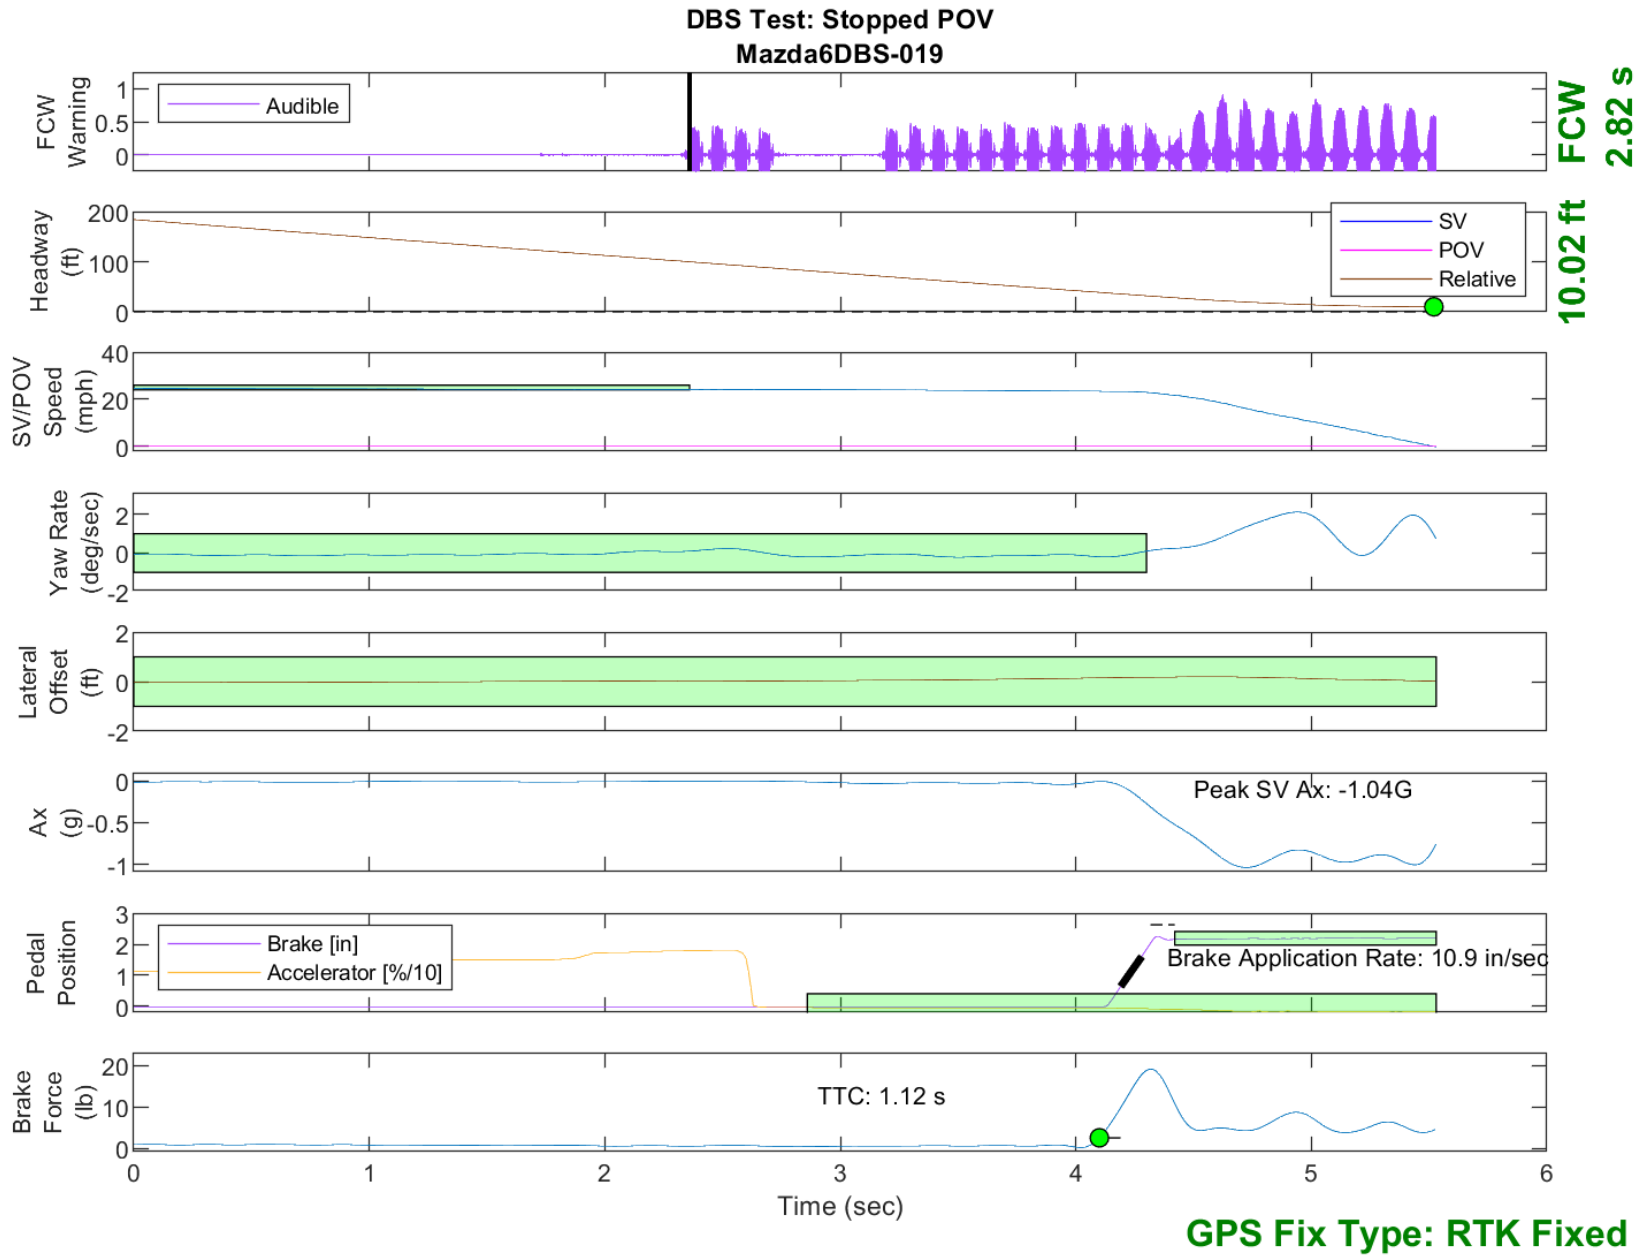


Figure E18. Time History for DBS Run 19, SV Encounters Stopped POV



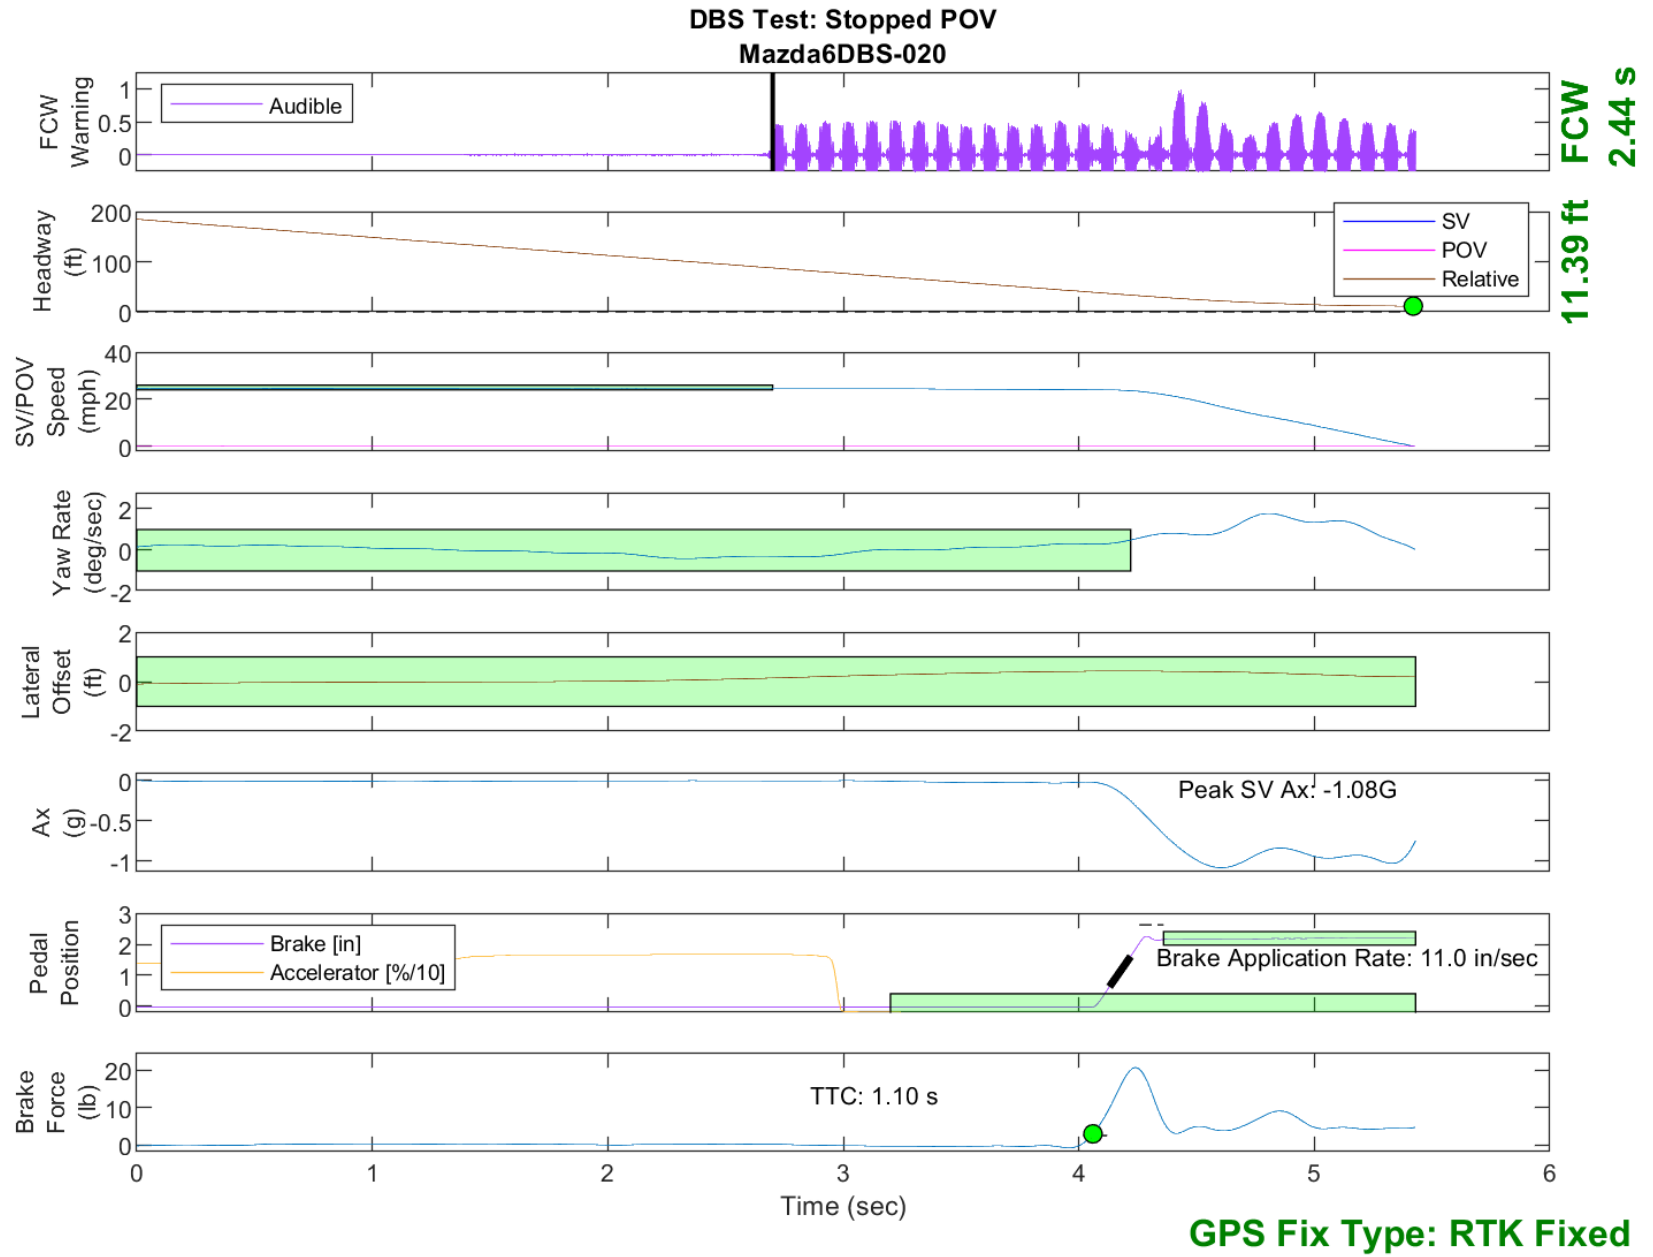


Figure E19. Time History for DBS Run 20, SV Encounters Stopped POV

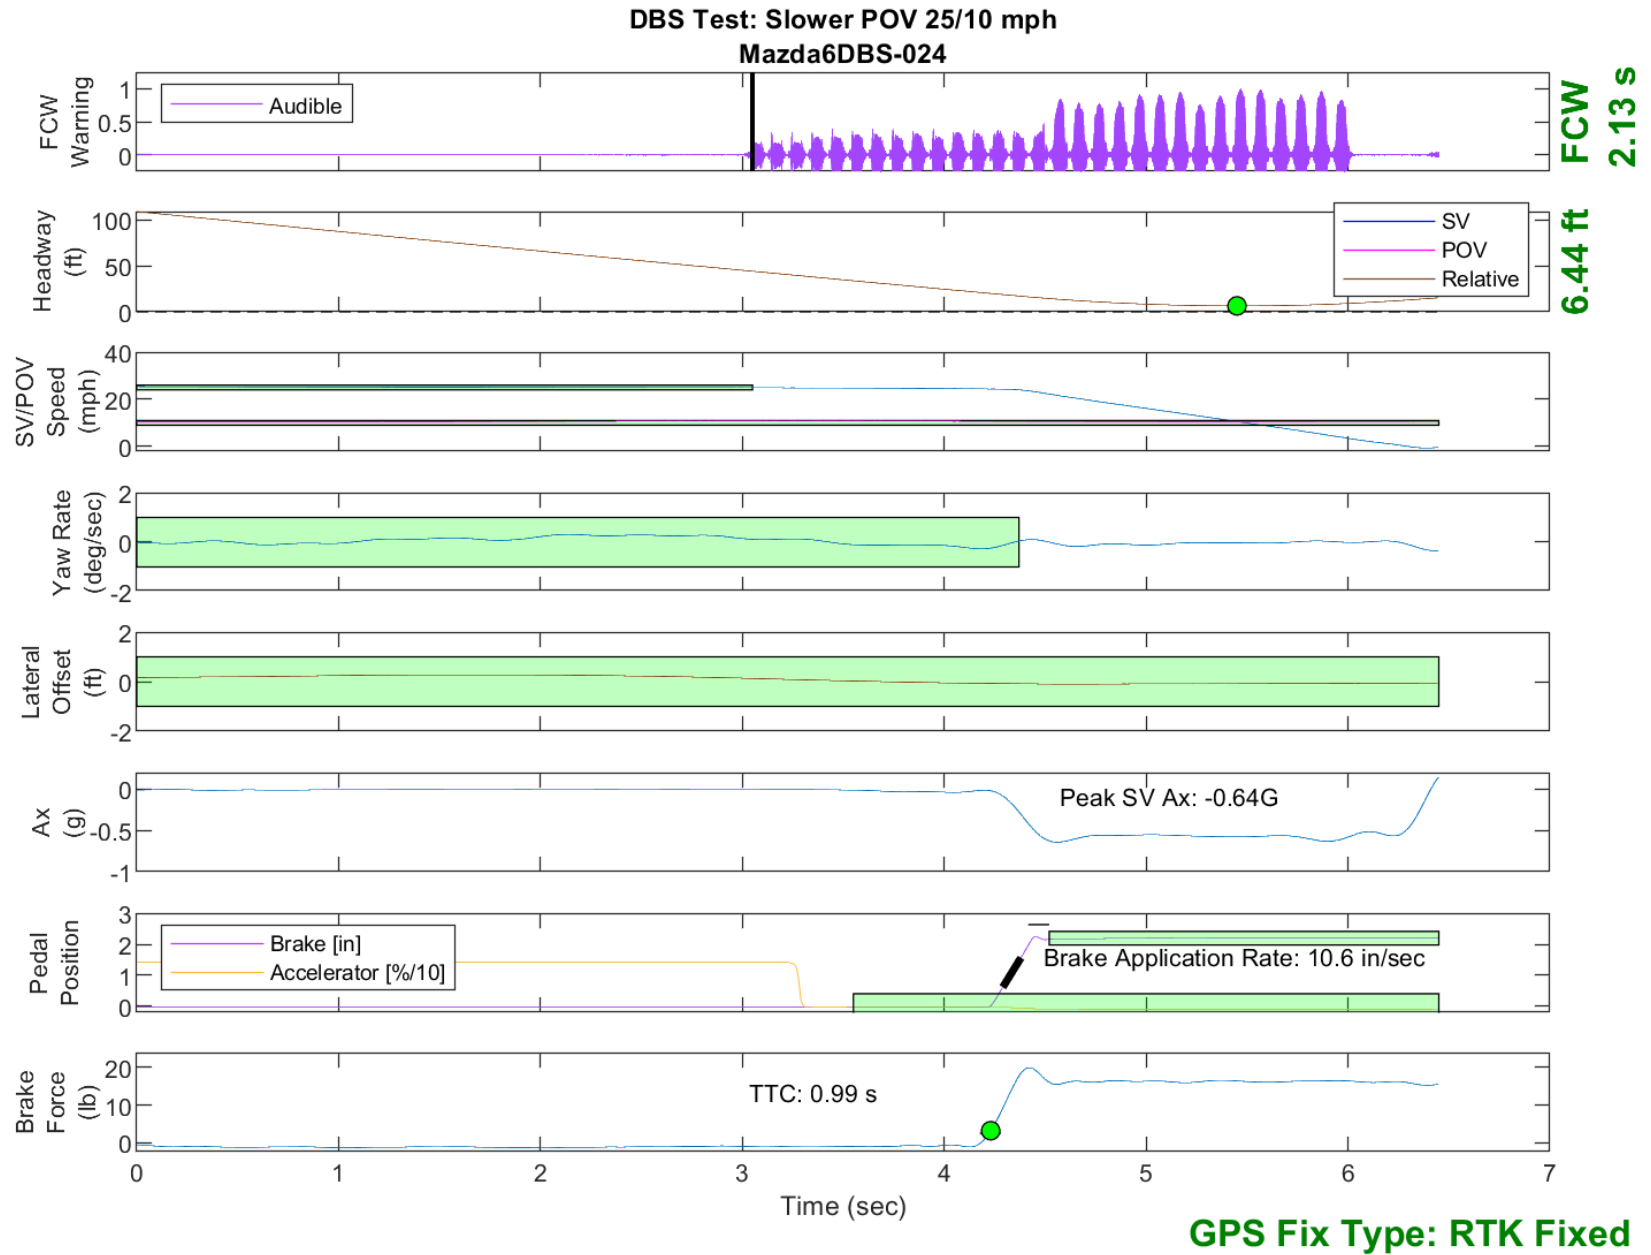


Figure E20. Time History for DBS Run 24, SV Encounters Slower POV, SV 25 mph, POV 10 mph

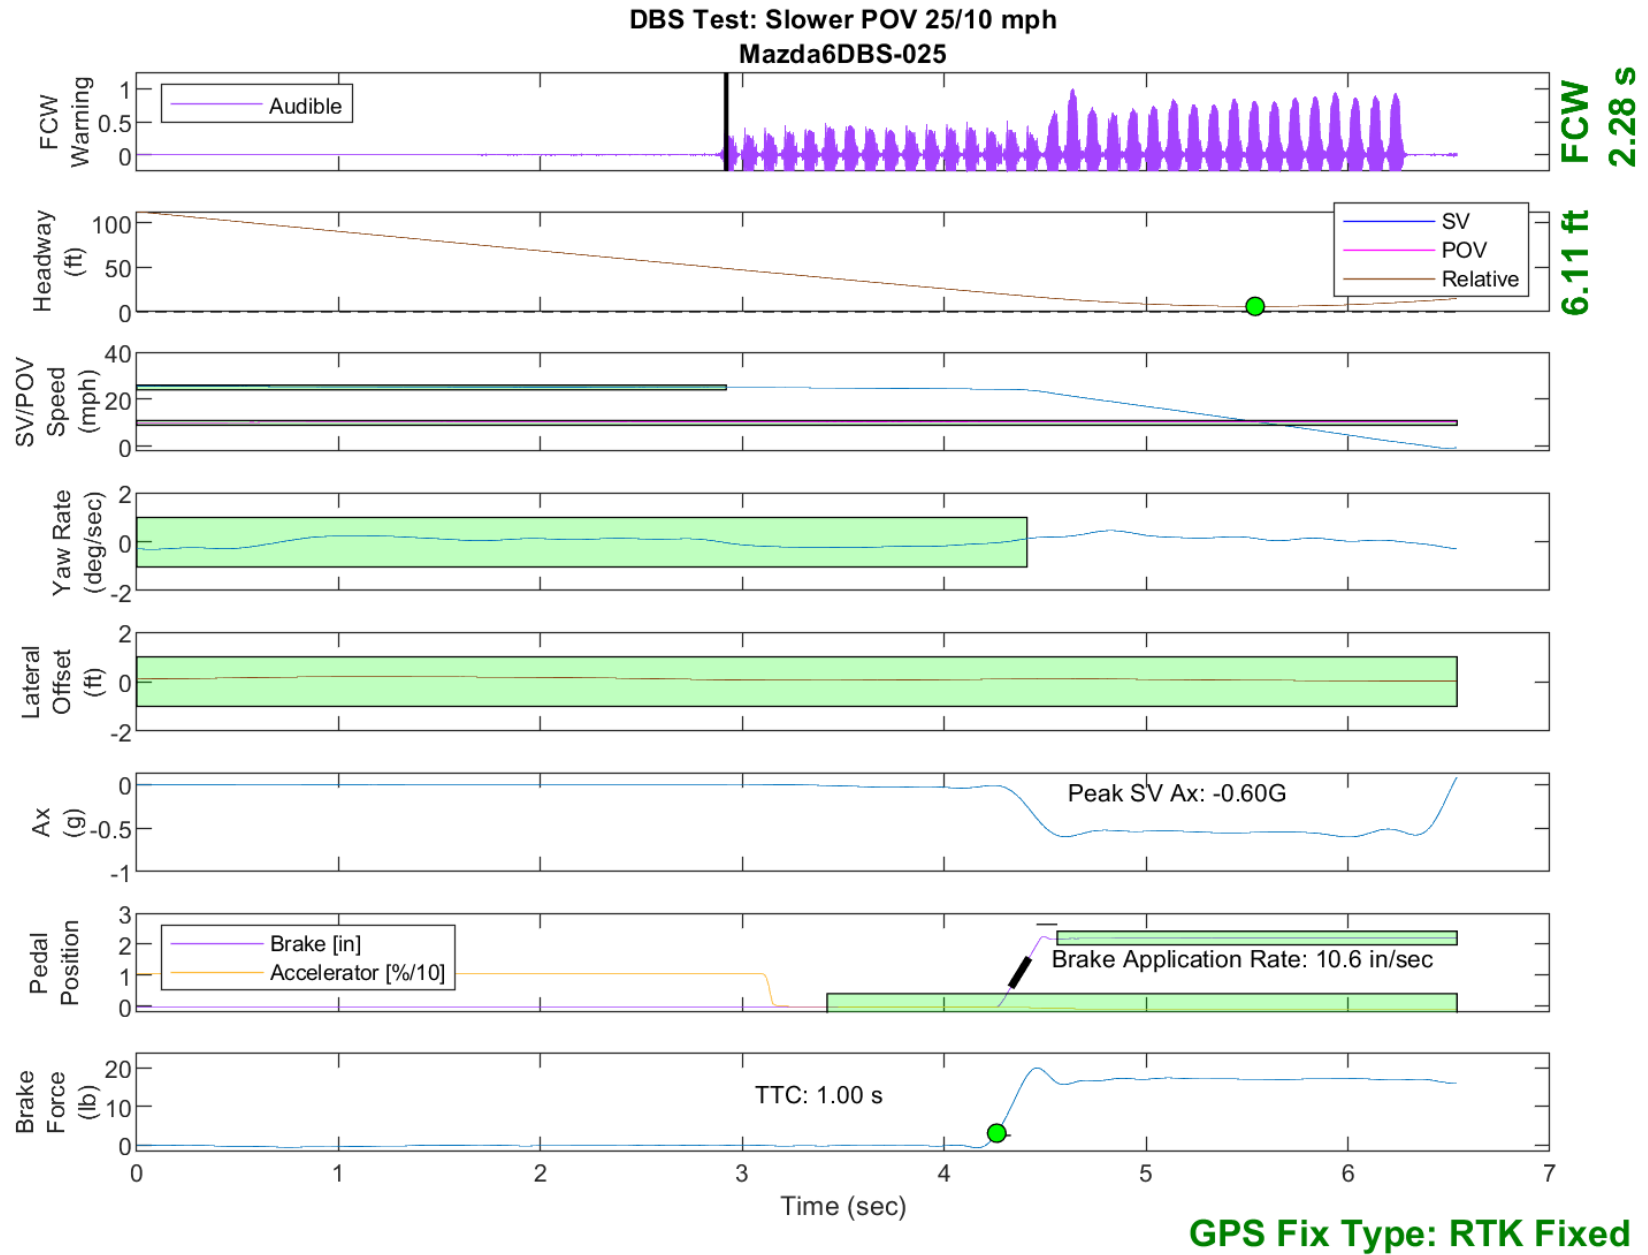


Figure E21. Time History for DBS Run 25, SV Encounters Slower POV, SV 25 mph, POV 10 mph

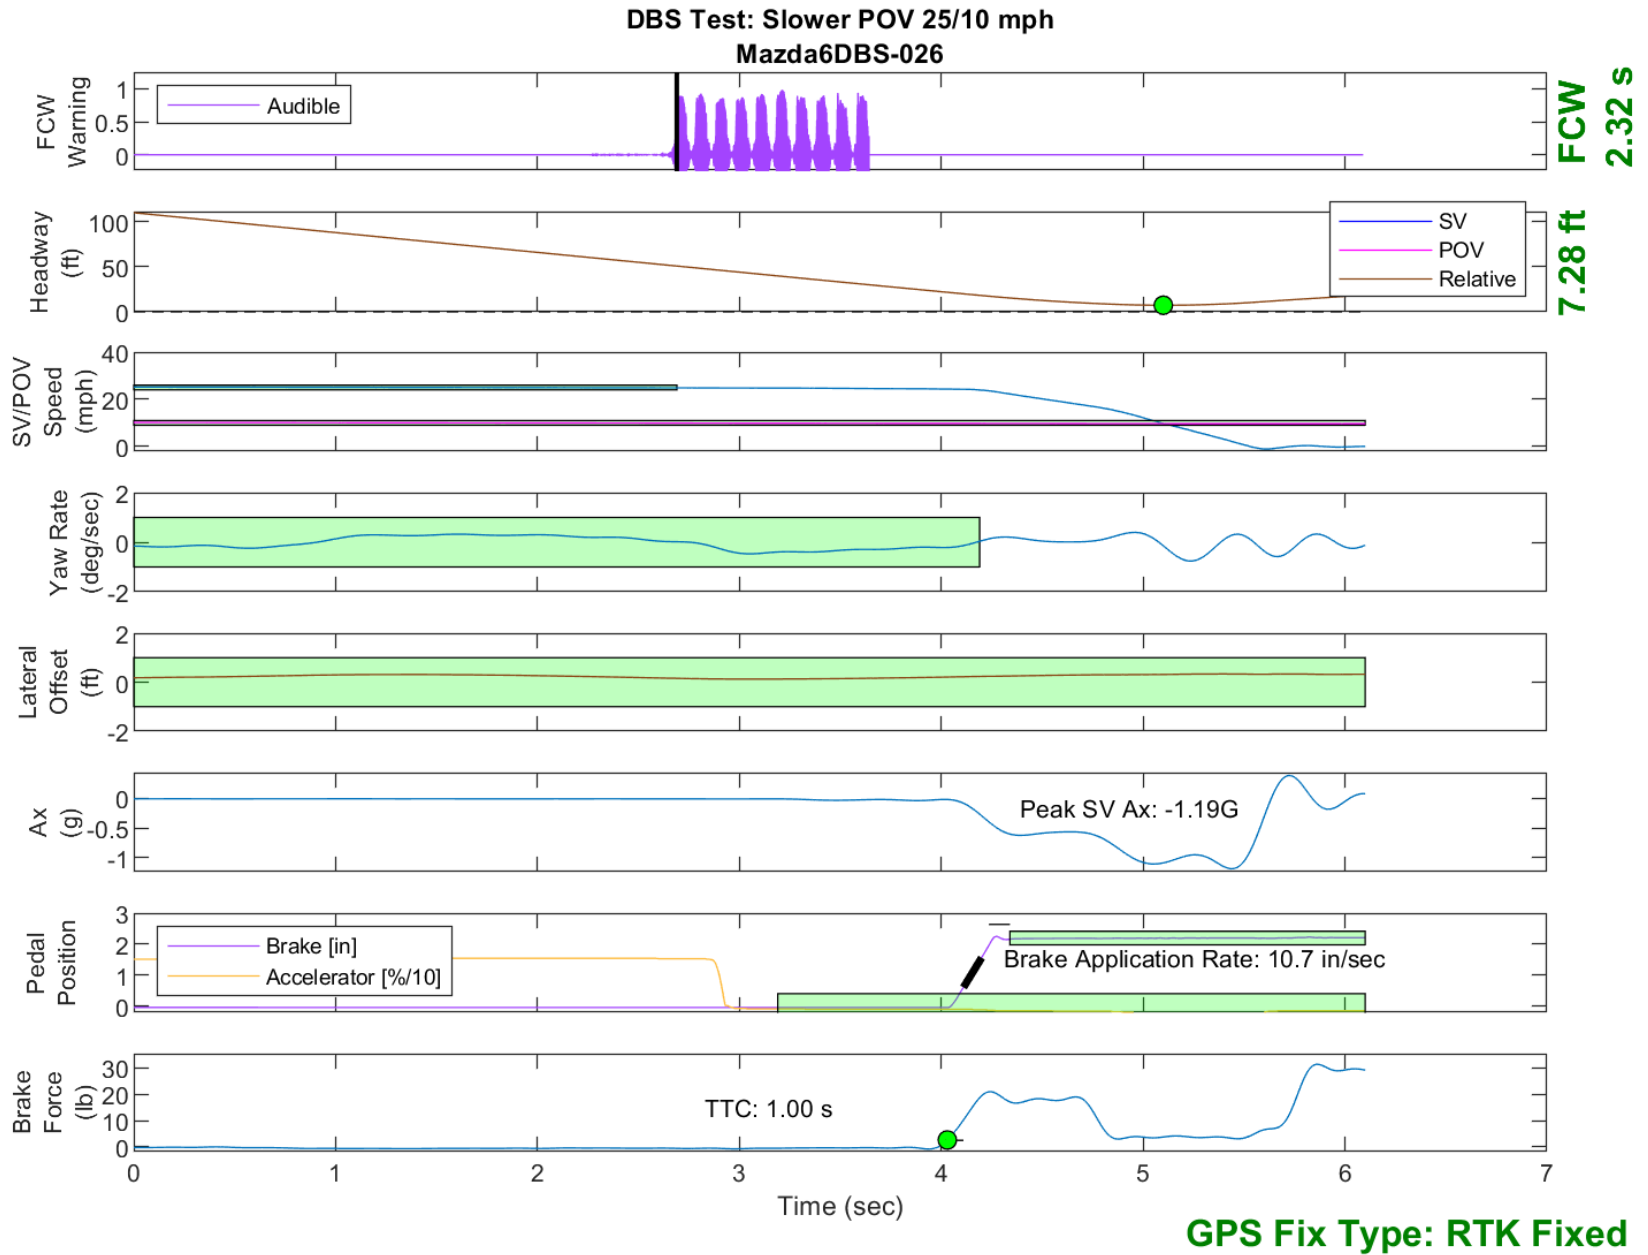


Figure E22. Time History for DBS Run 26, SV Encounters Slower POV, SV 25 mph, POV 10 mph

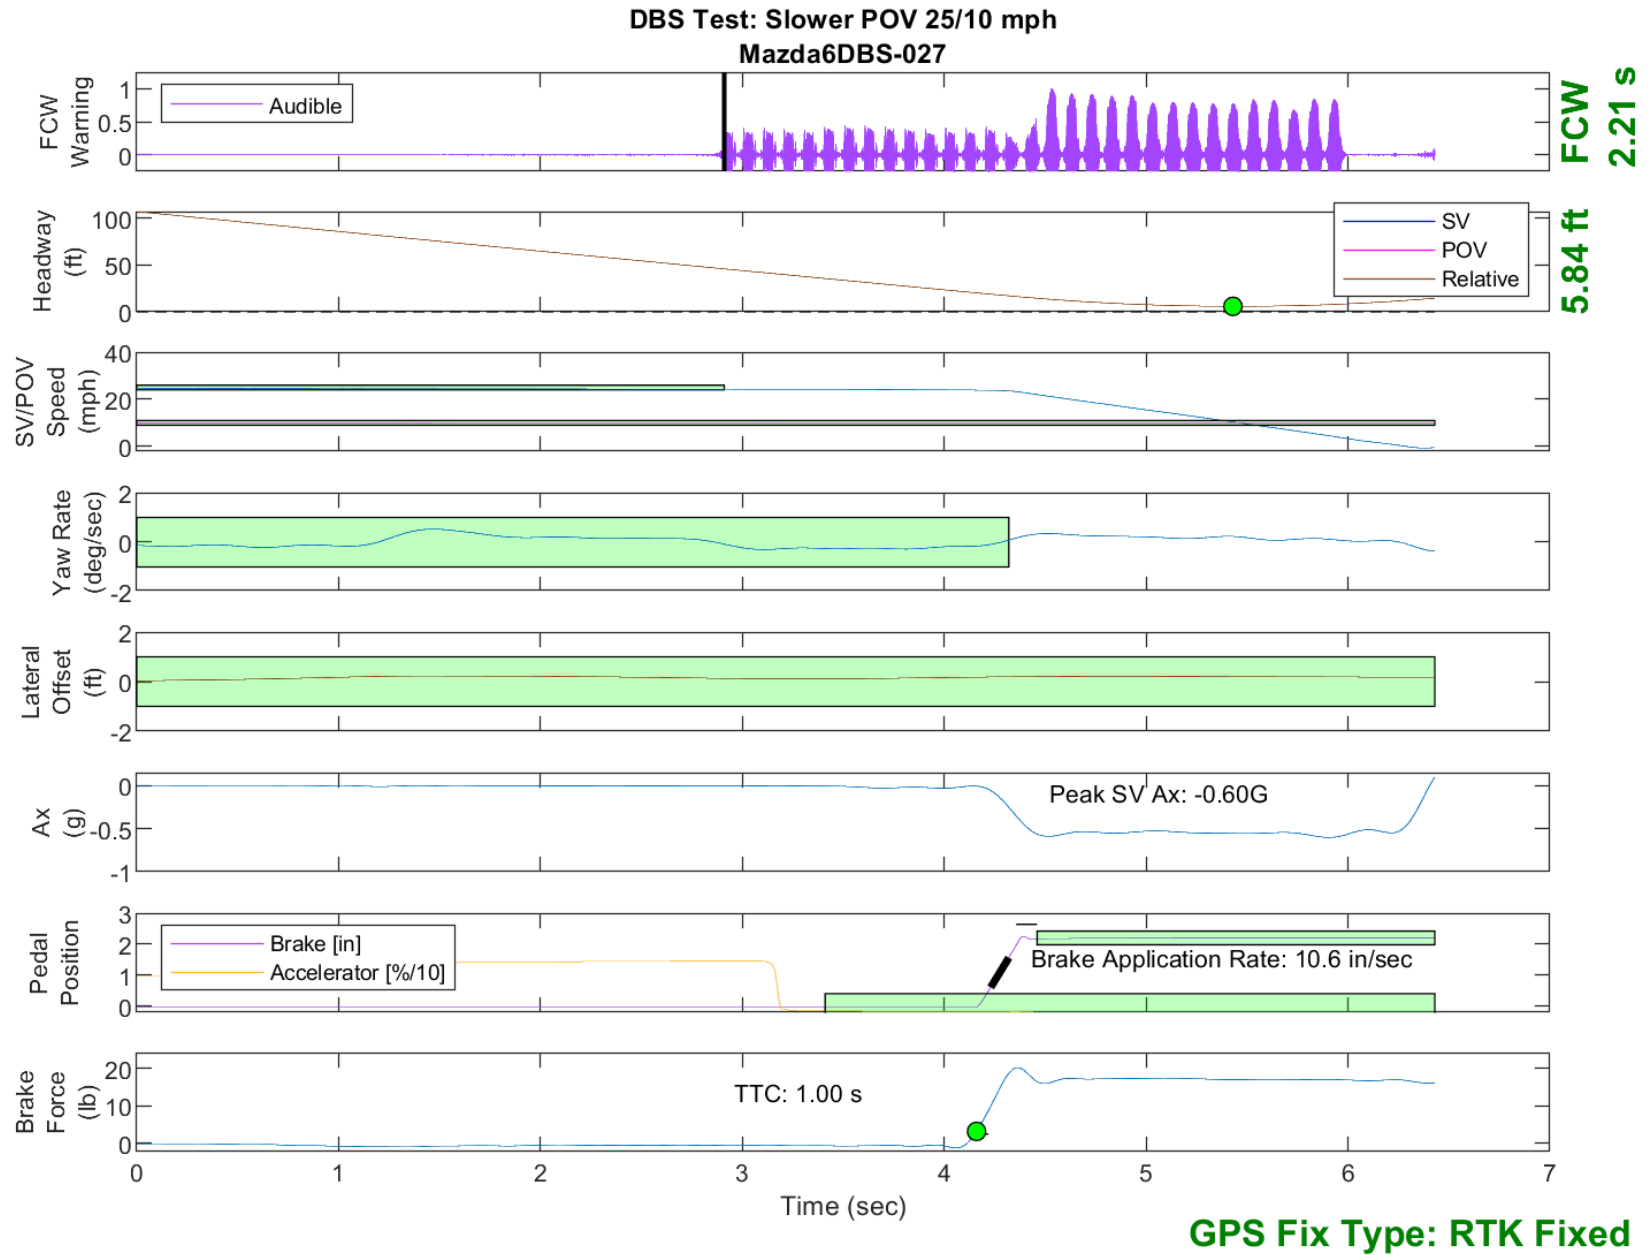


Figure E23. Time History for DBS Run 27, SV Encounters Slower POV, SV 25 mph, POV 10 mph

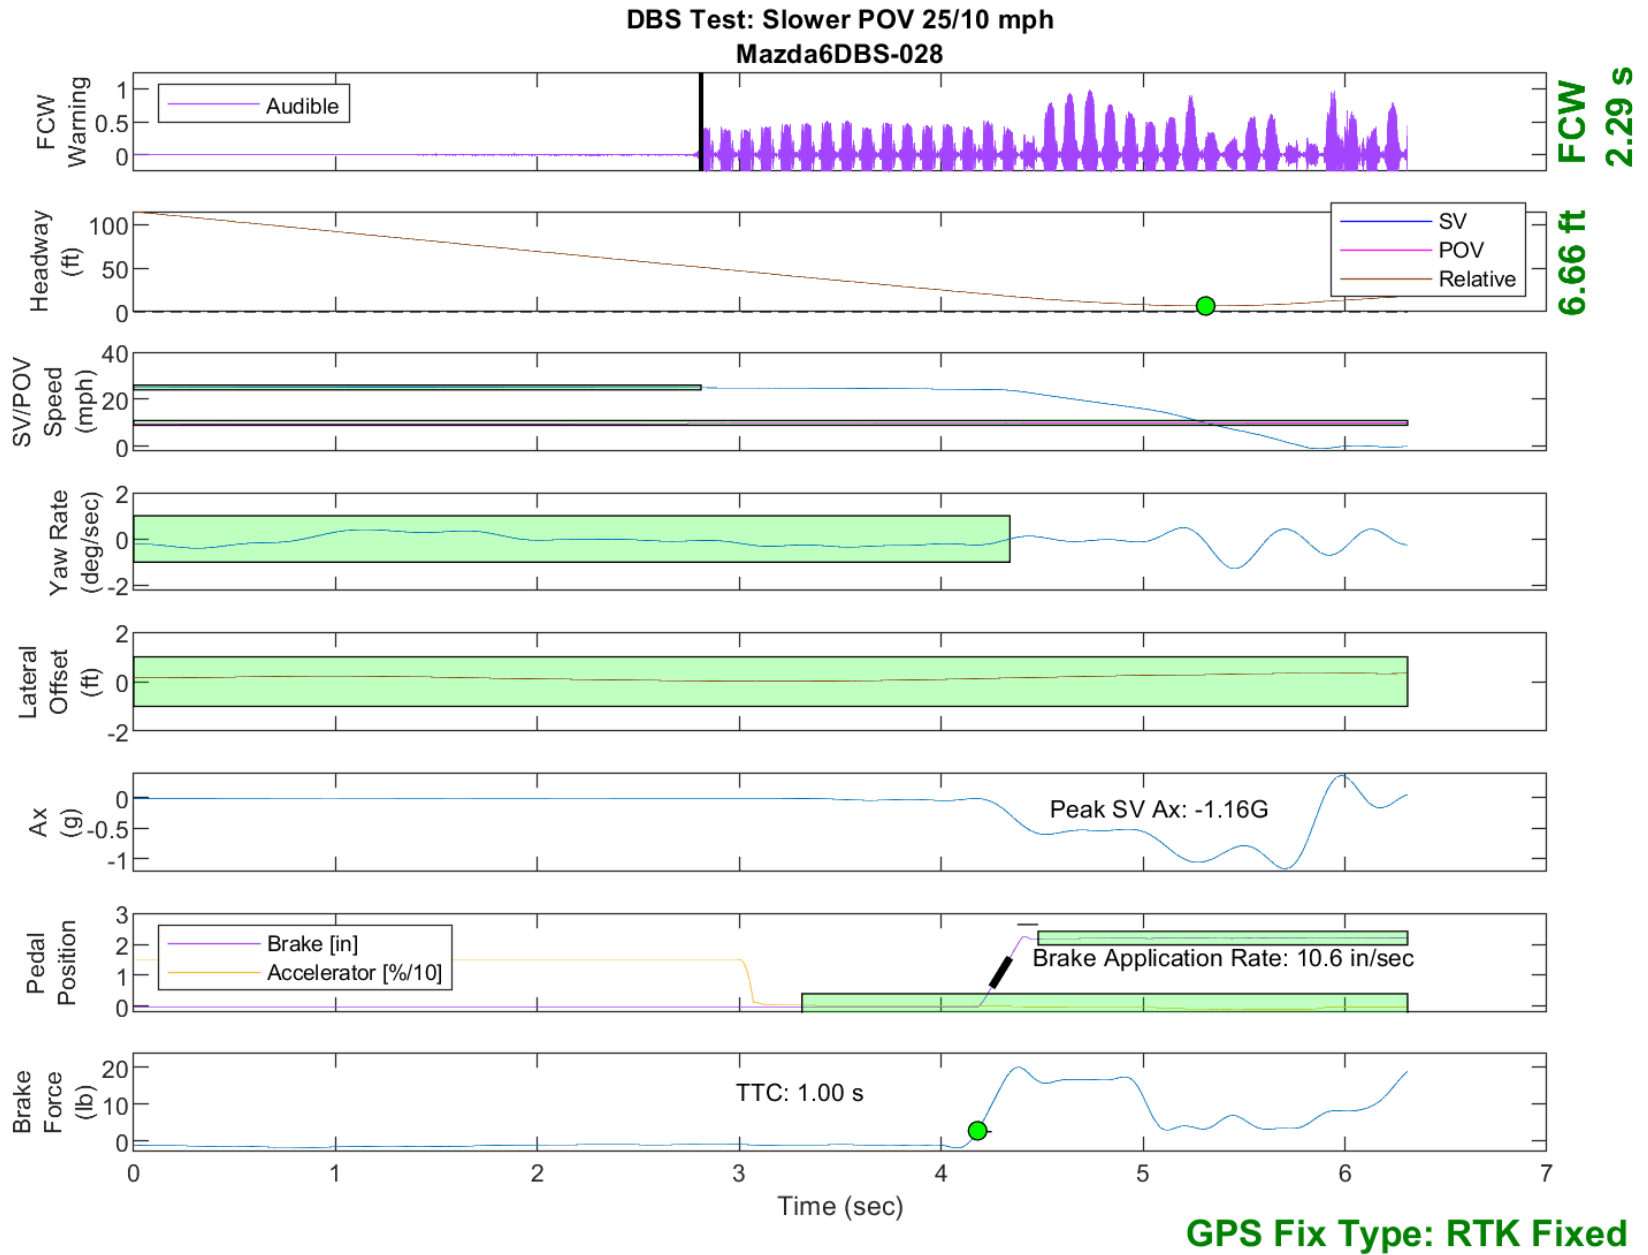


Figure E24. Time History for DBS Run 28, SV Encounters Slower POV, SV 25 mph, POV 10 mph

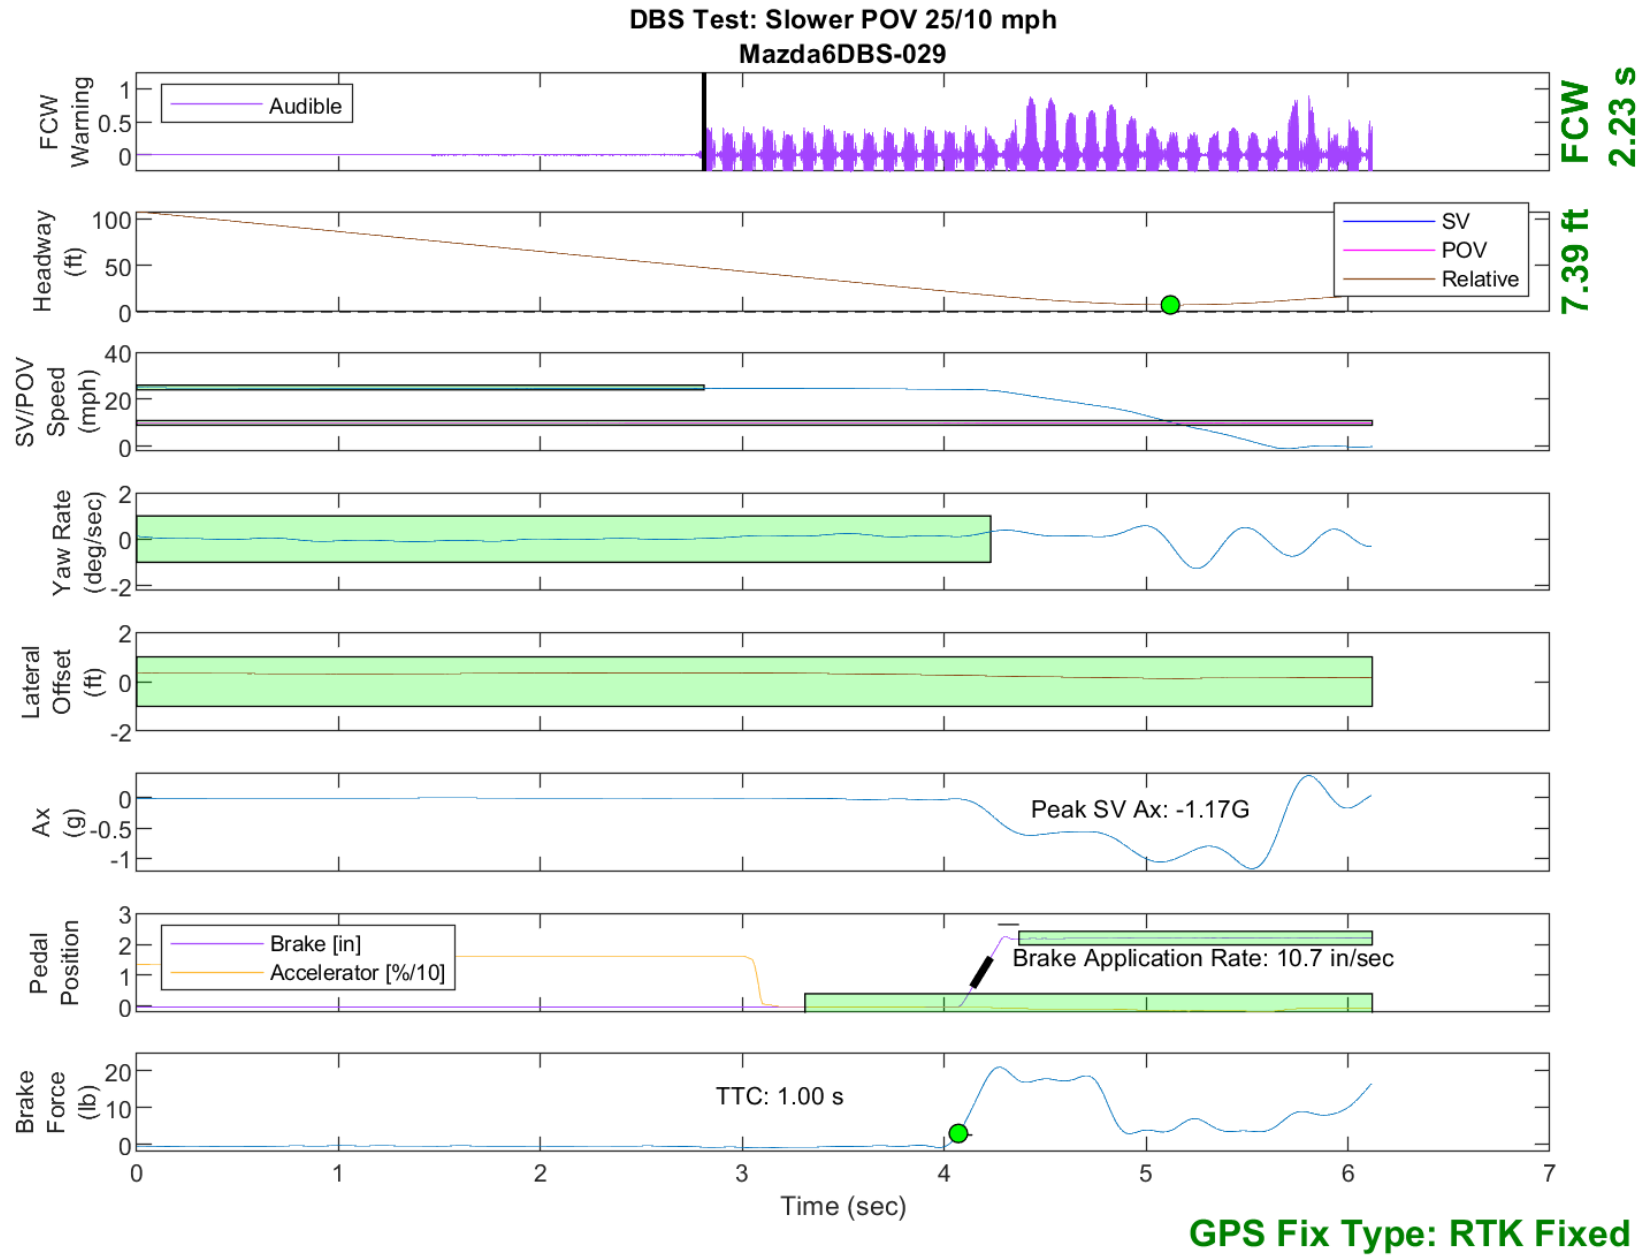


Figure E25. Time History for DBS Run 29, SV Encounters Slower POV, SV 25 mph, POV 10 mph

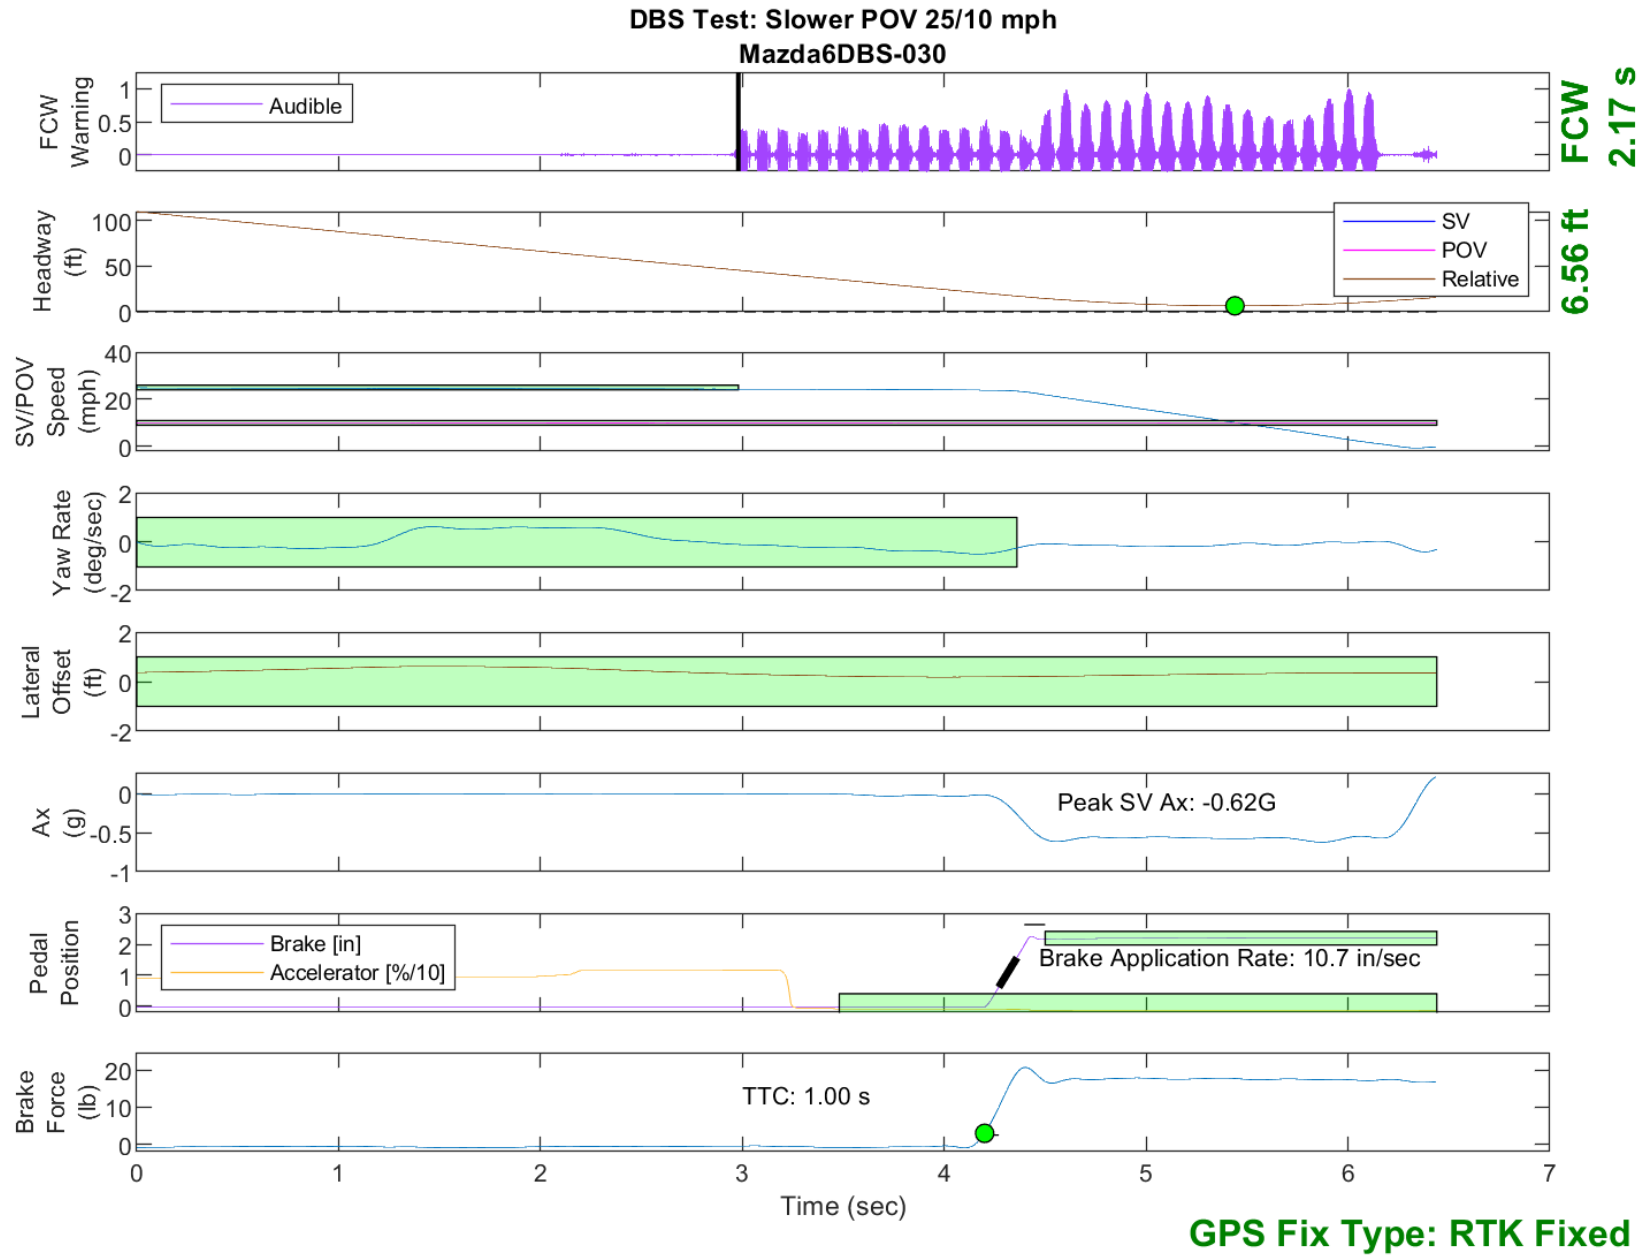


Figure E26. Time History for DBS Run 30, SV Encounters Slower POV, SV 25 mph, POV 10 mph



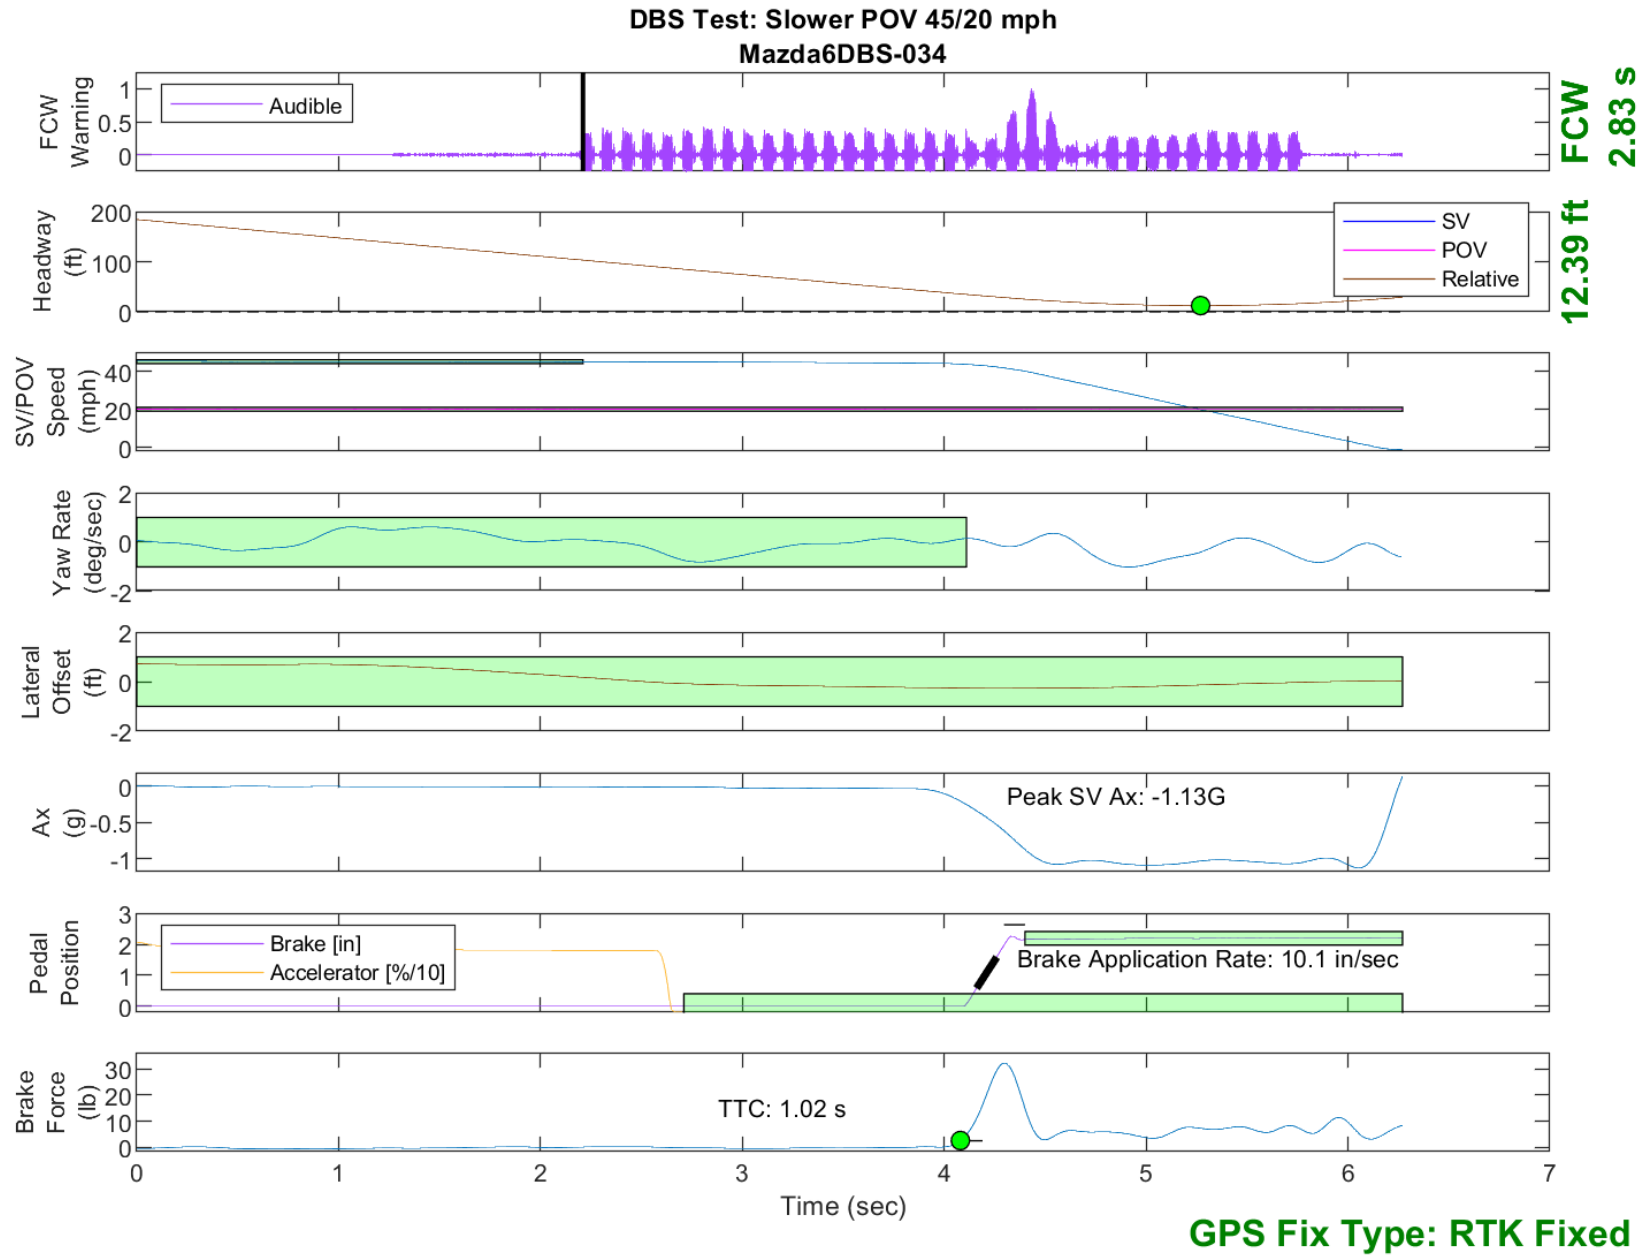


Figure E27. Time History for DBS Run 34, SV Encounters Slower POV, SV 45 mph, POV 20 mph

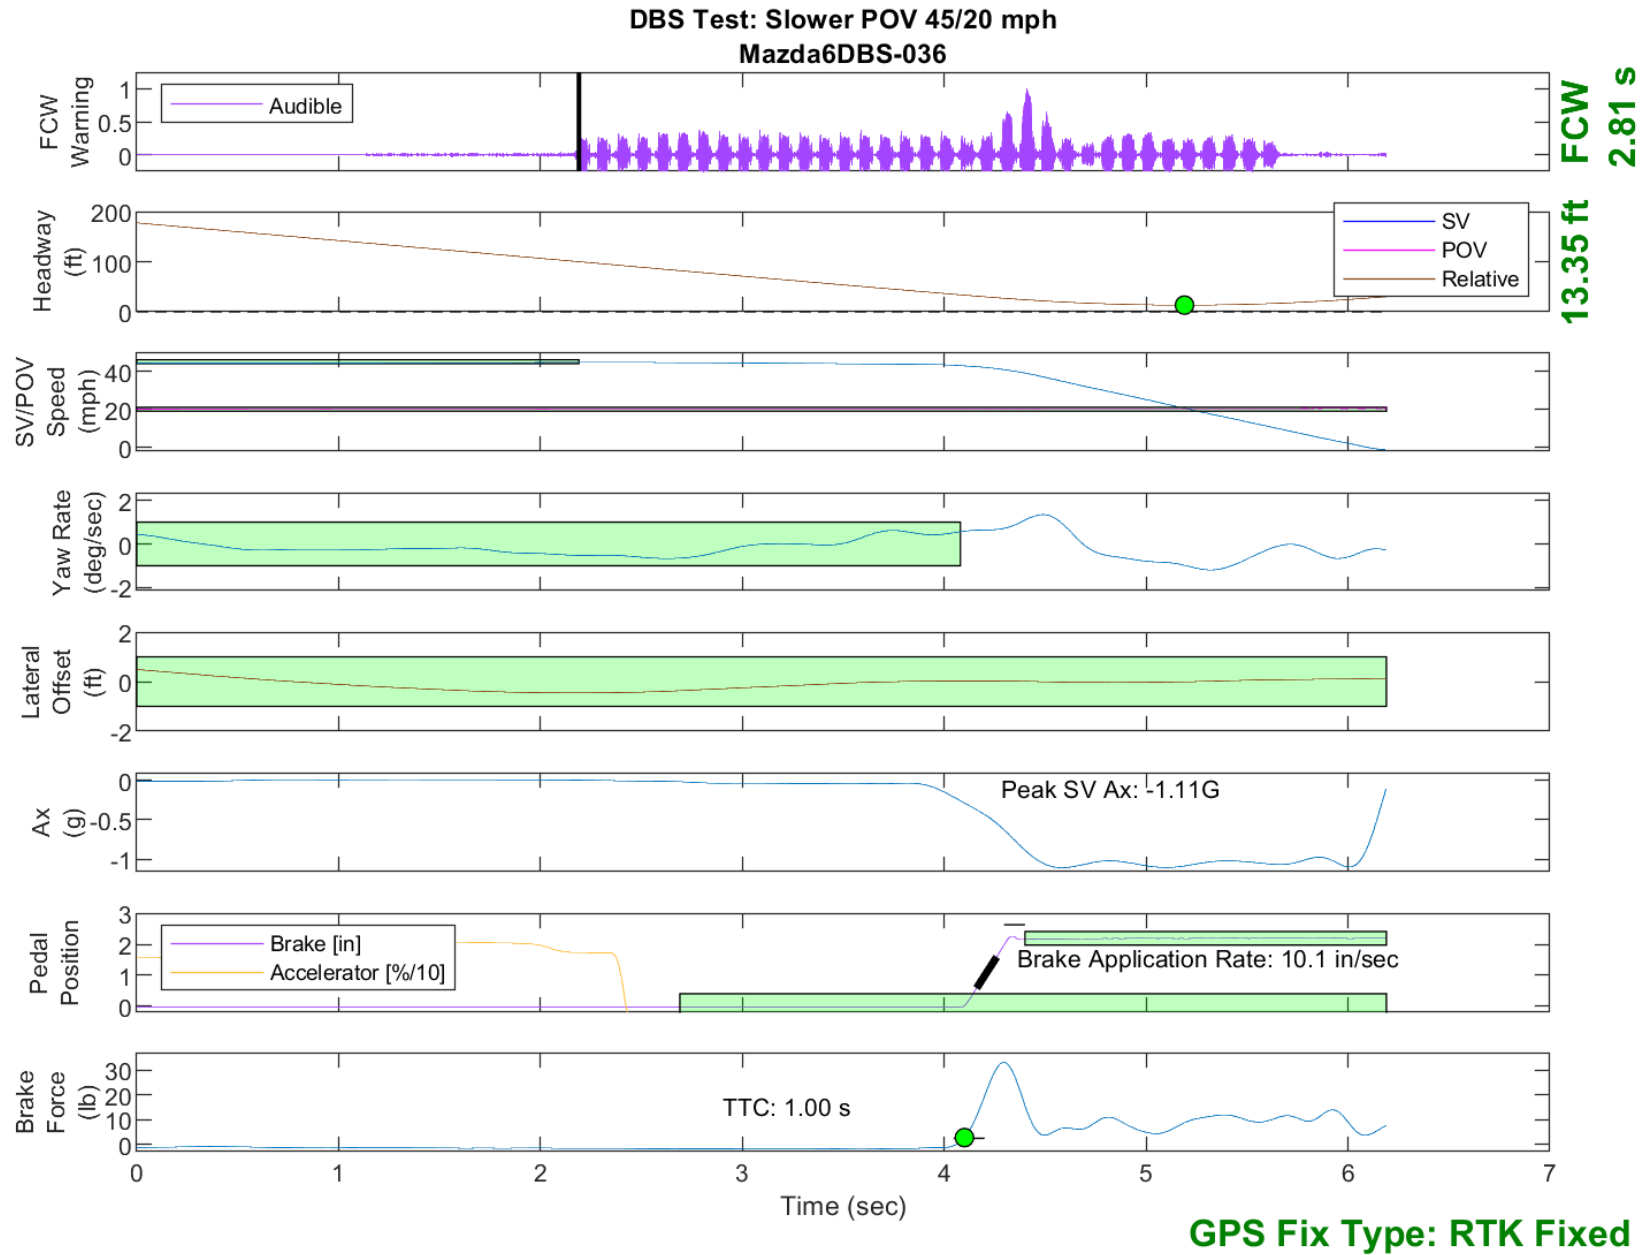


Figure E28. Time History for DBS Run 36, SV Encounters Slower POV, SV 45 mph, POV 20 mph

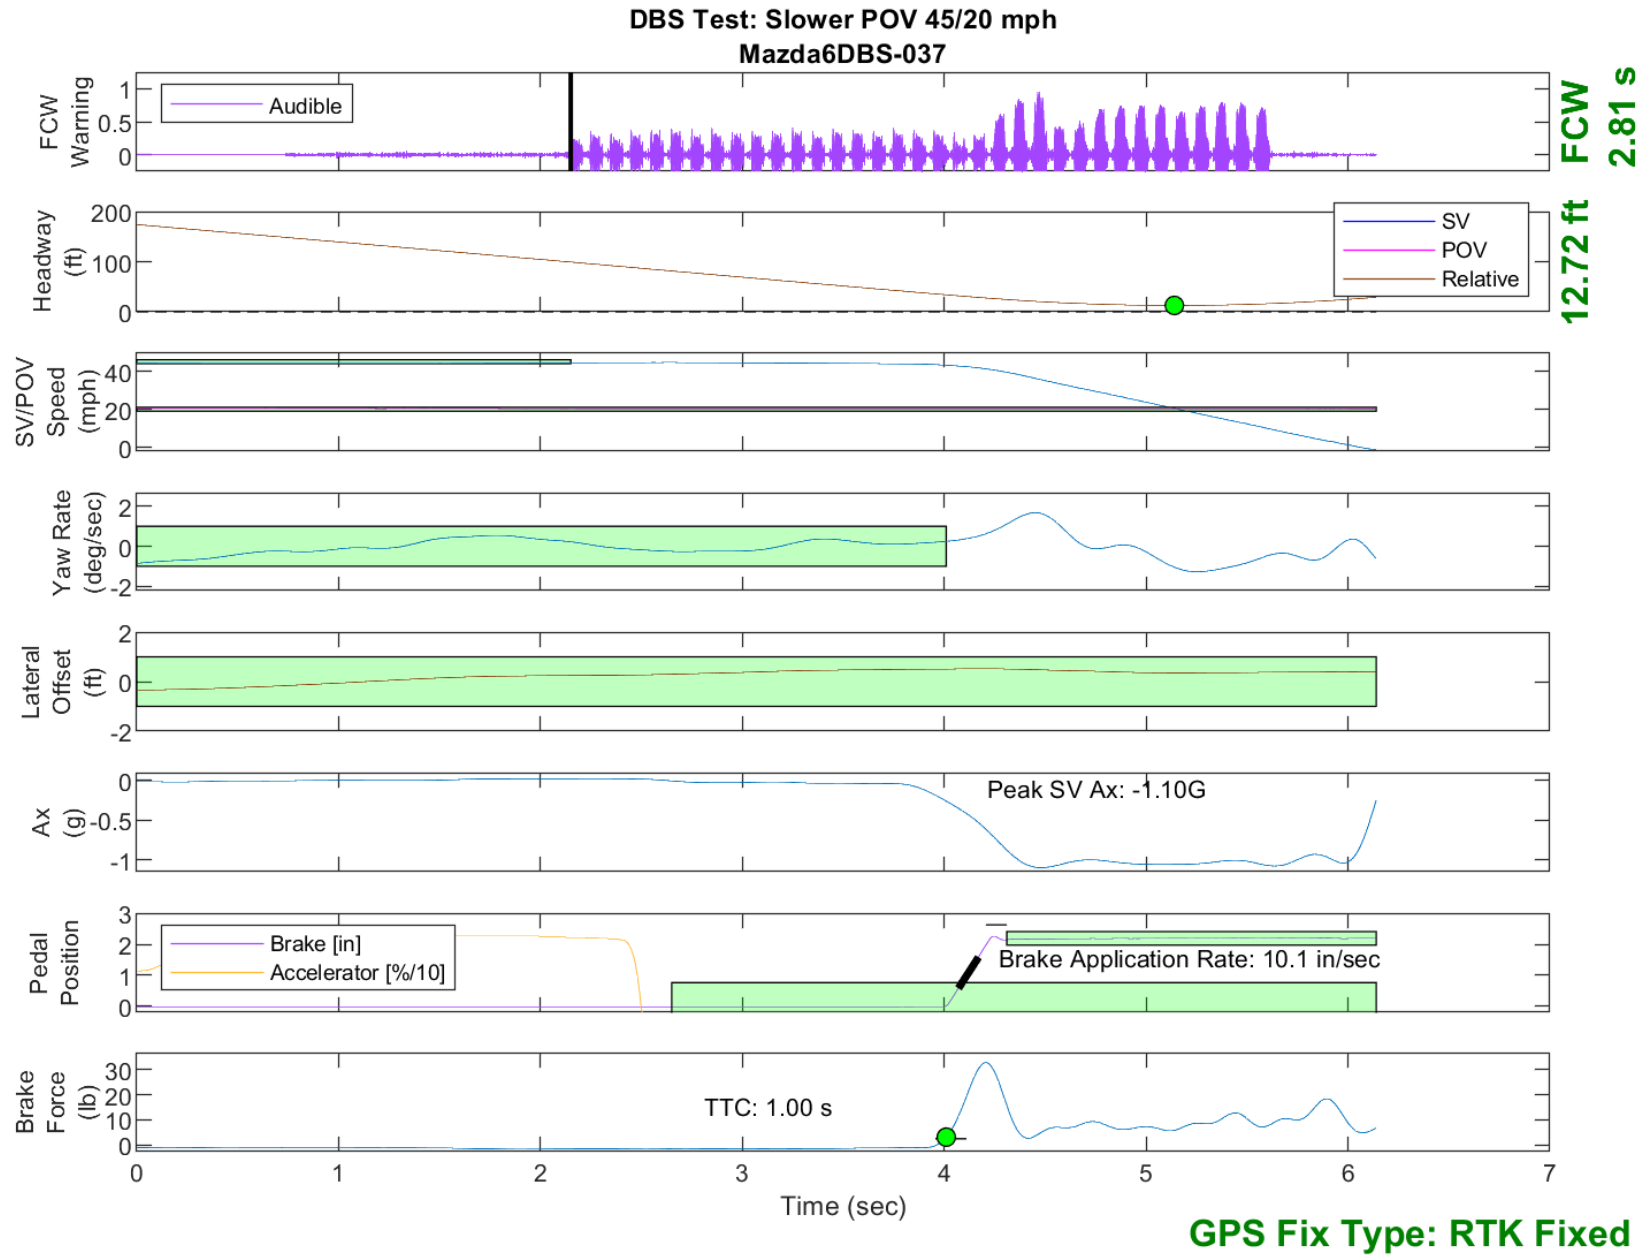


Figure E29. Time History for DBS Run 37, SV Encounters Slower POV, SV 45 mph, POV 20 mph

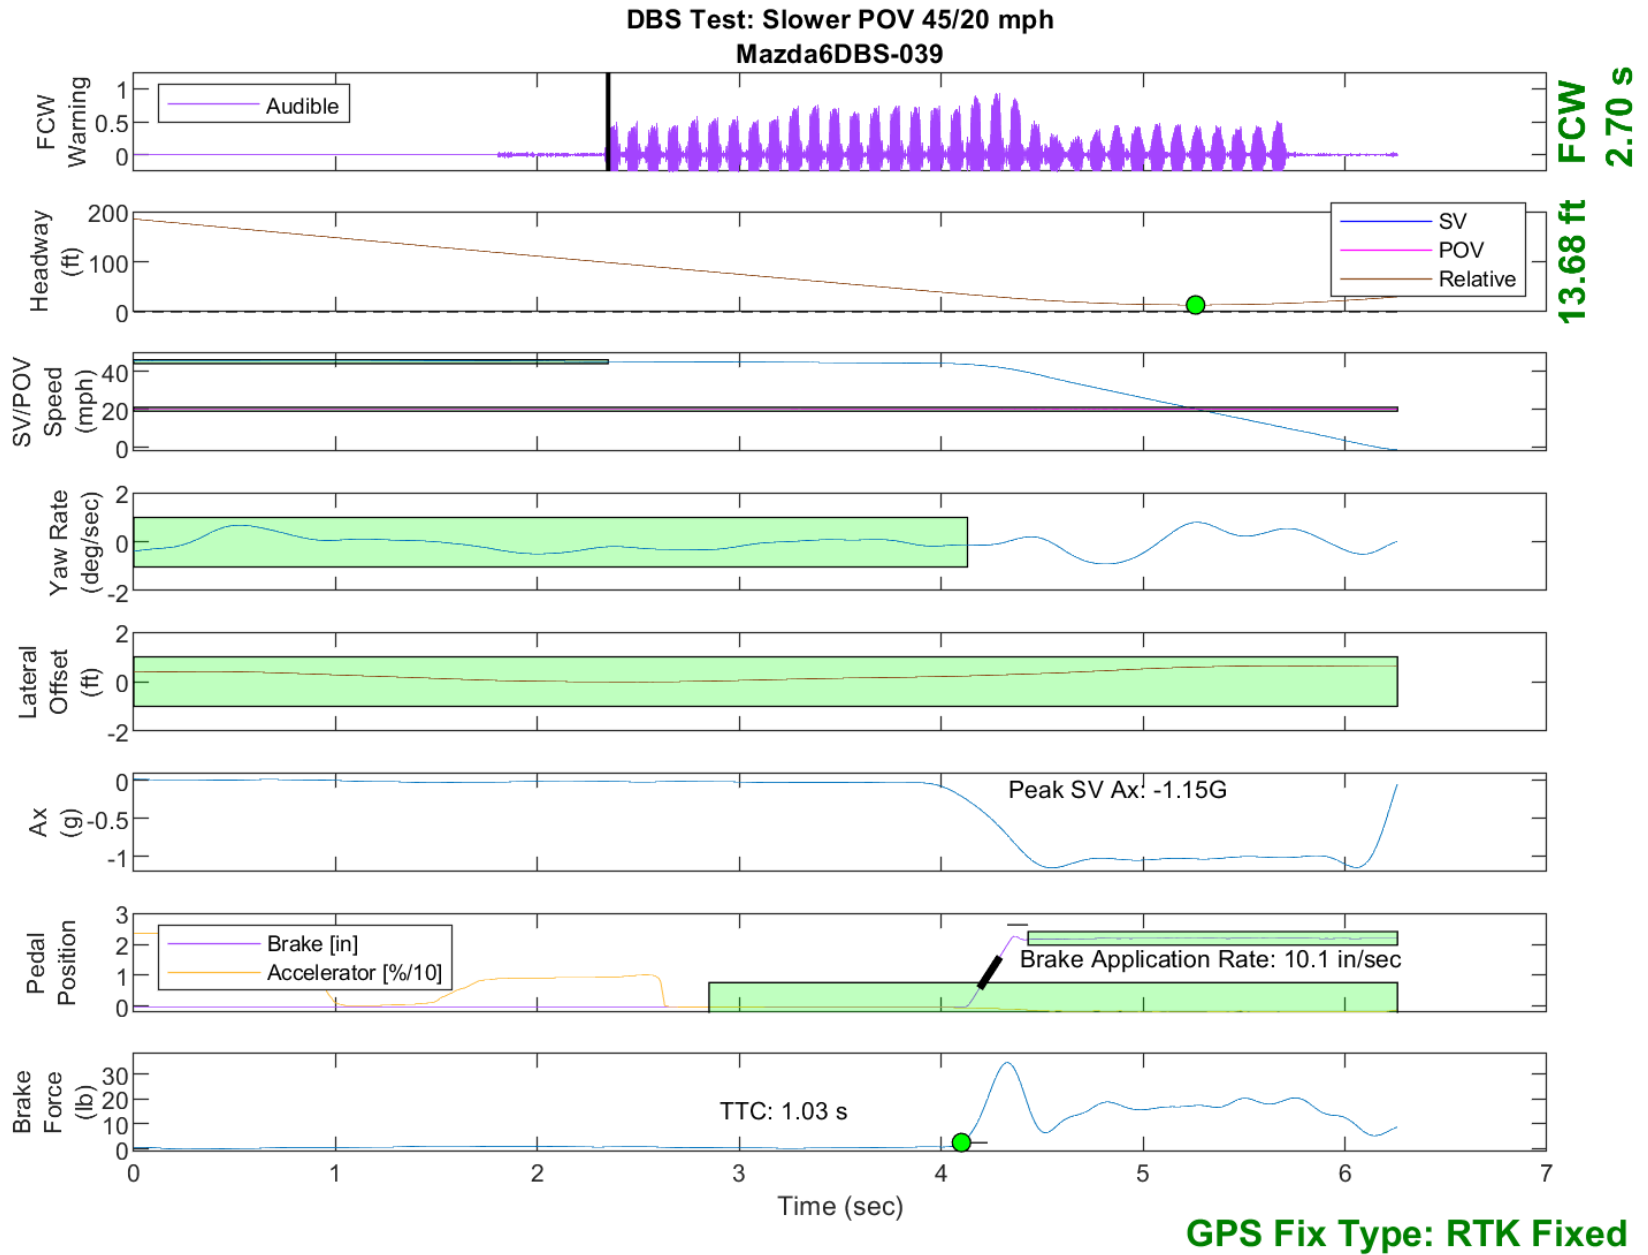


Figure E30. Time History for DBS Run 39, SV Encounters Slower POV, SV 45 mph, POV 20 mph

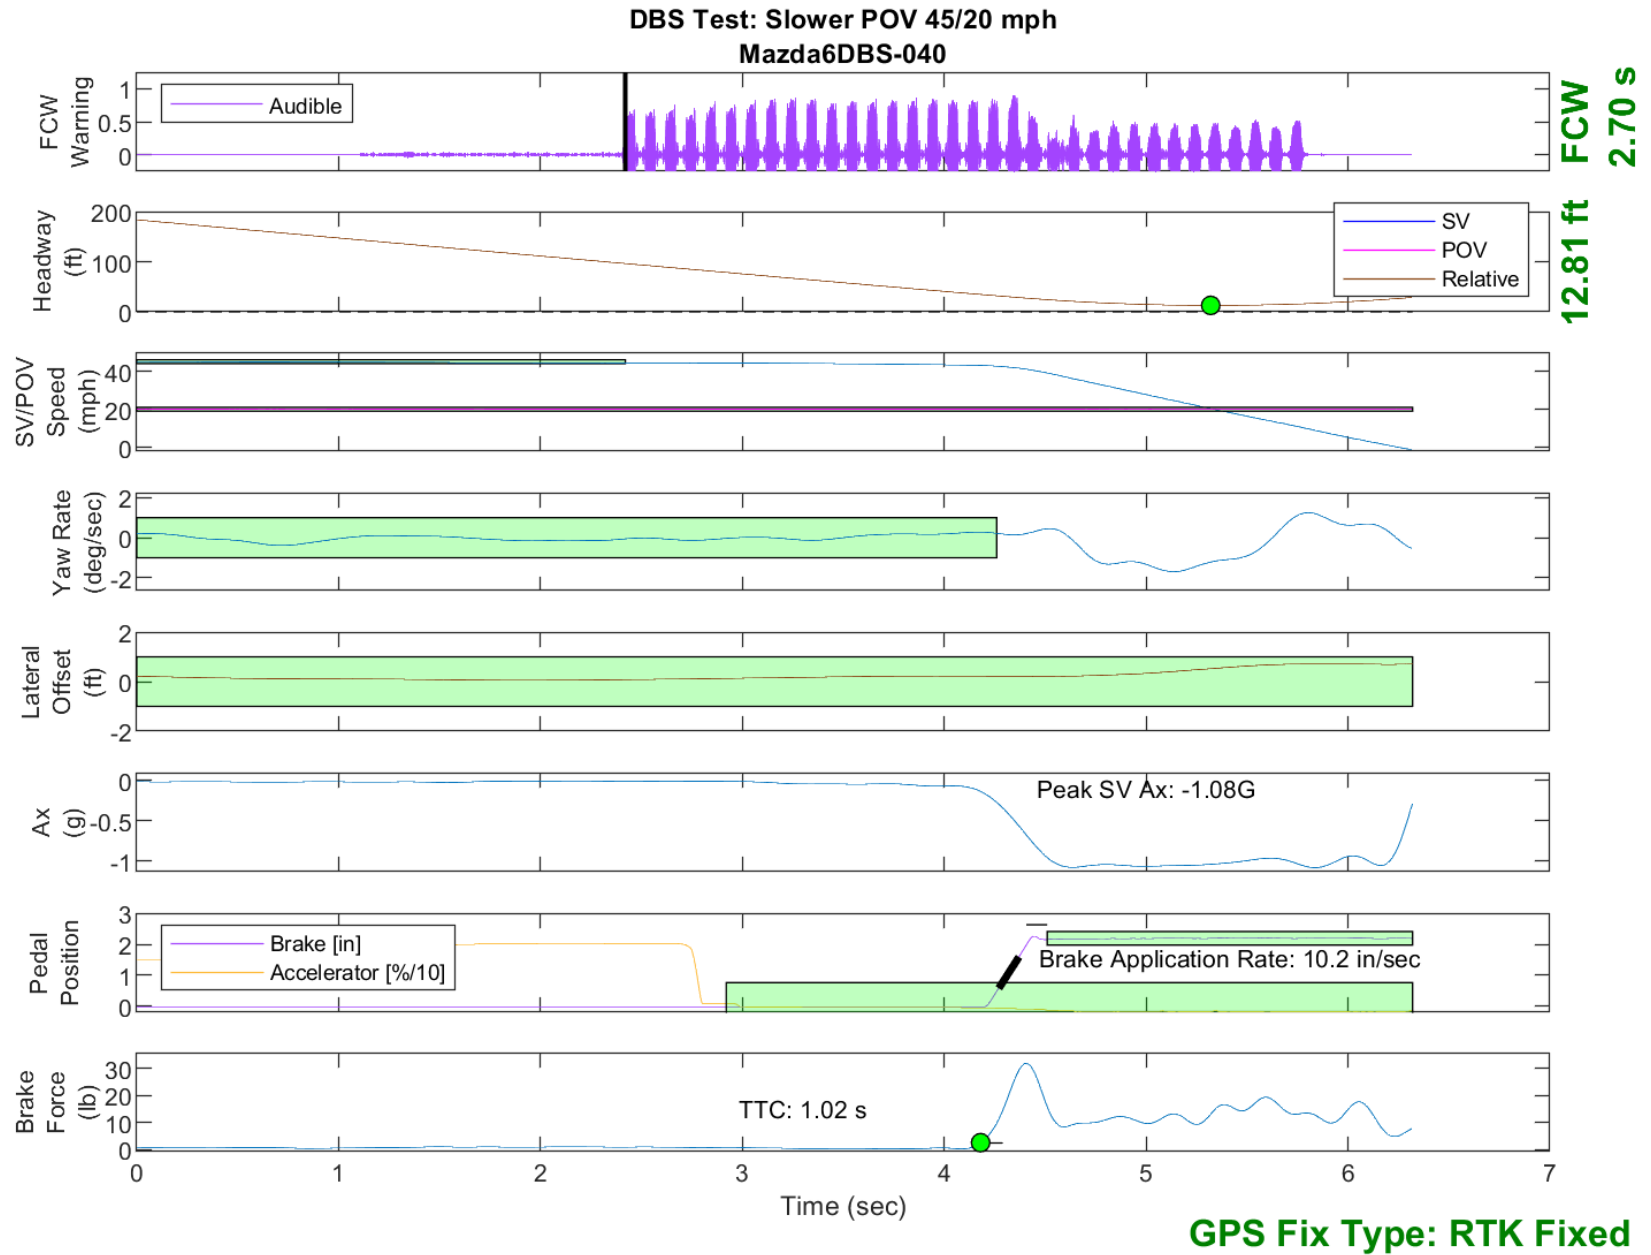


Figure E31. Time History for DBS Run 40, SV Encounters Slower POV, SV 45 mph, POV 20 mph

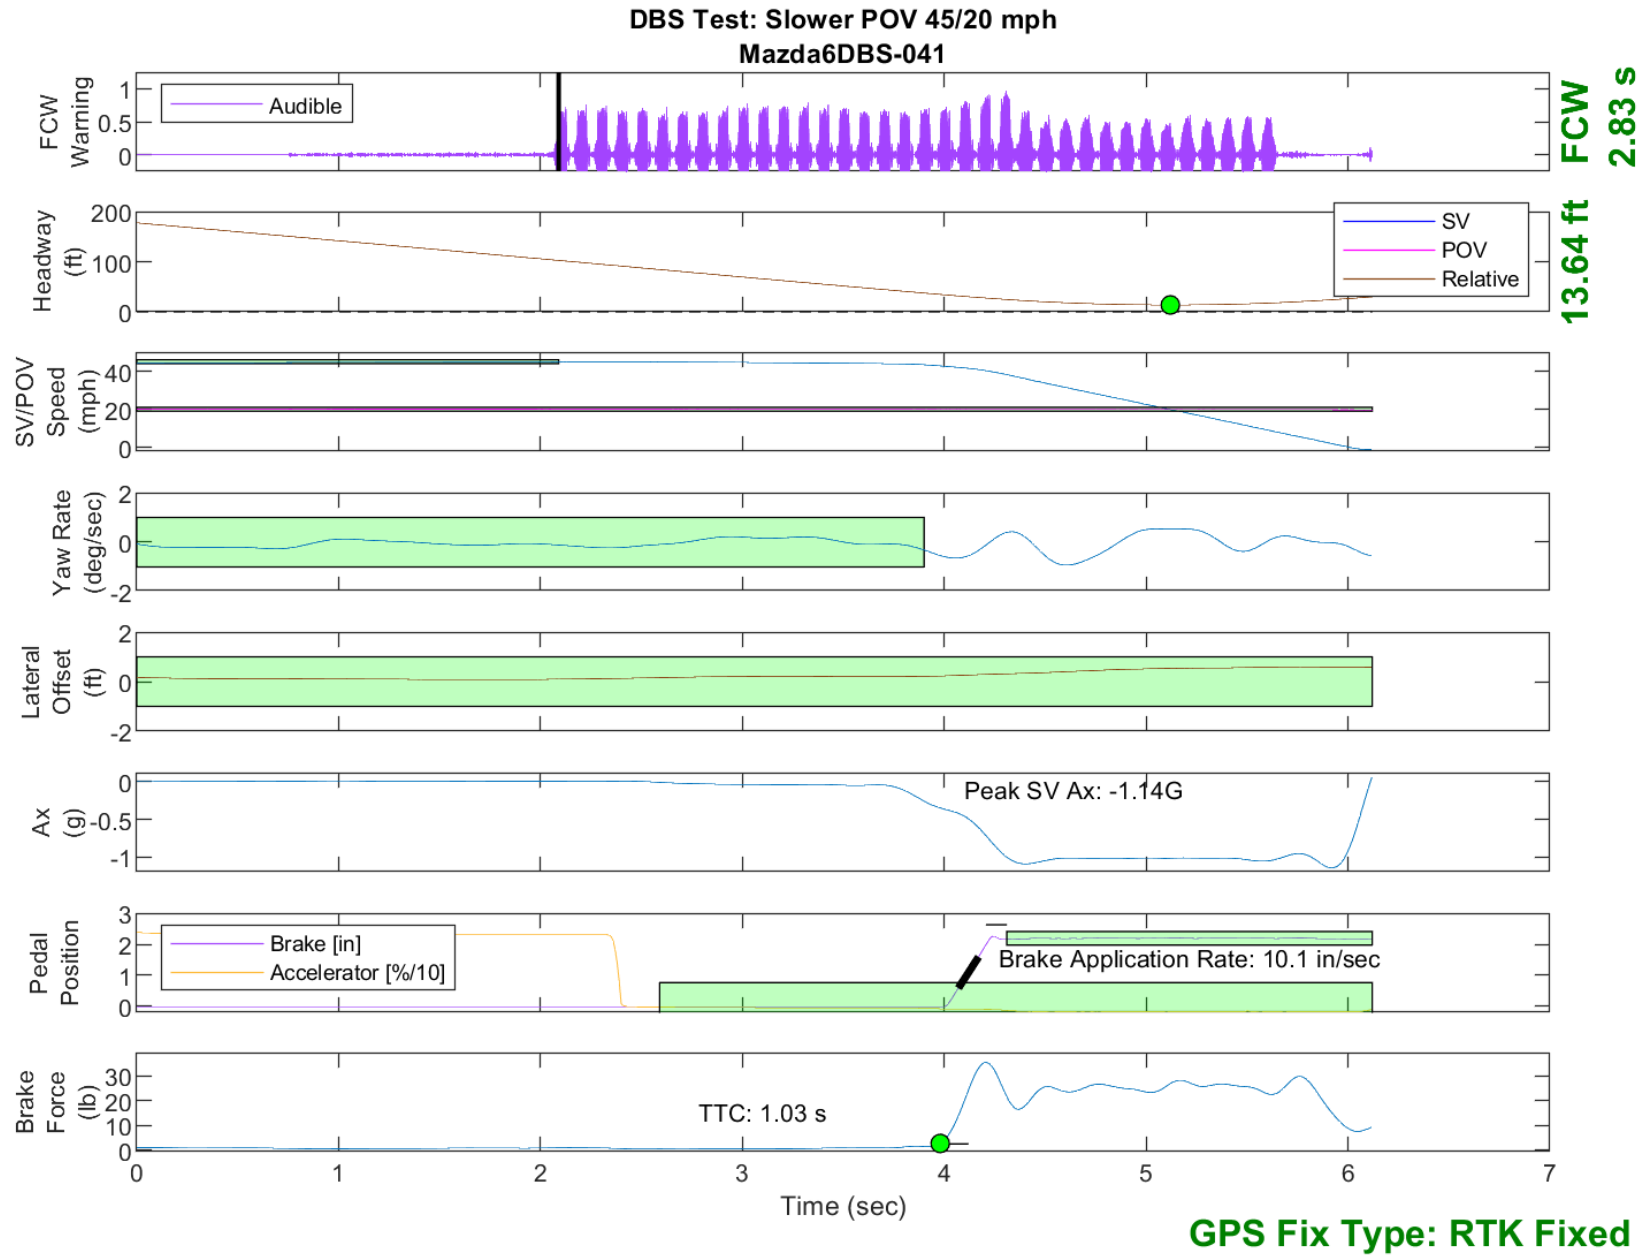


Figure E32. Time History for DBS Run 41, SV Encounters Slower POV, SV 45 mph, POV 20 mph

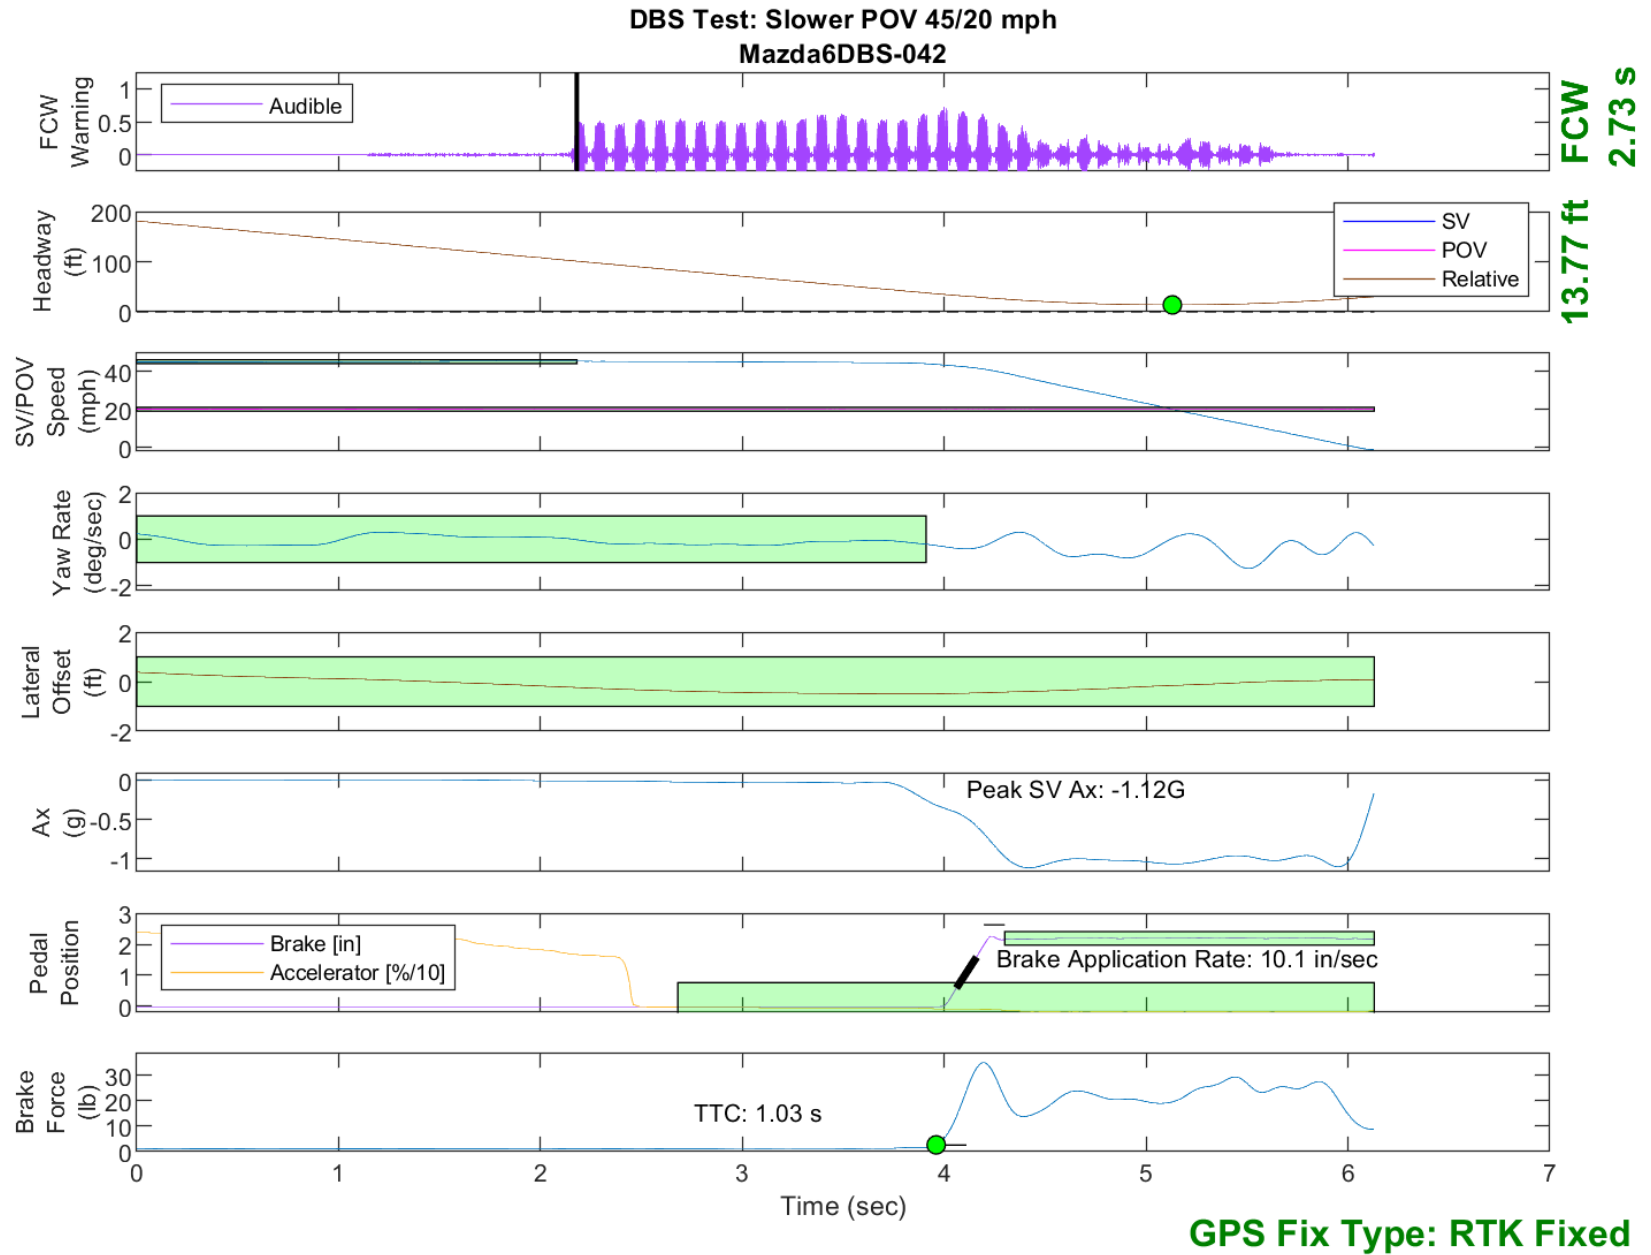


Figure E33. Time History for DBS Run 42, SV Encounters Slower POV, SV 45 mph, POV 20 mph

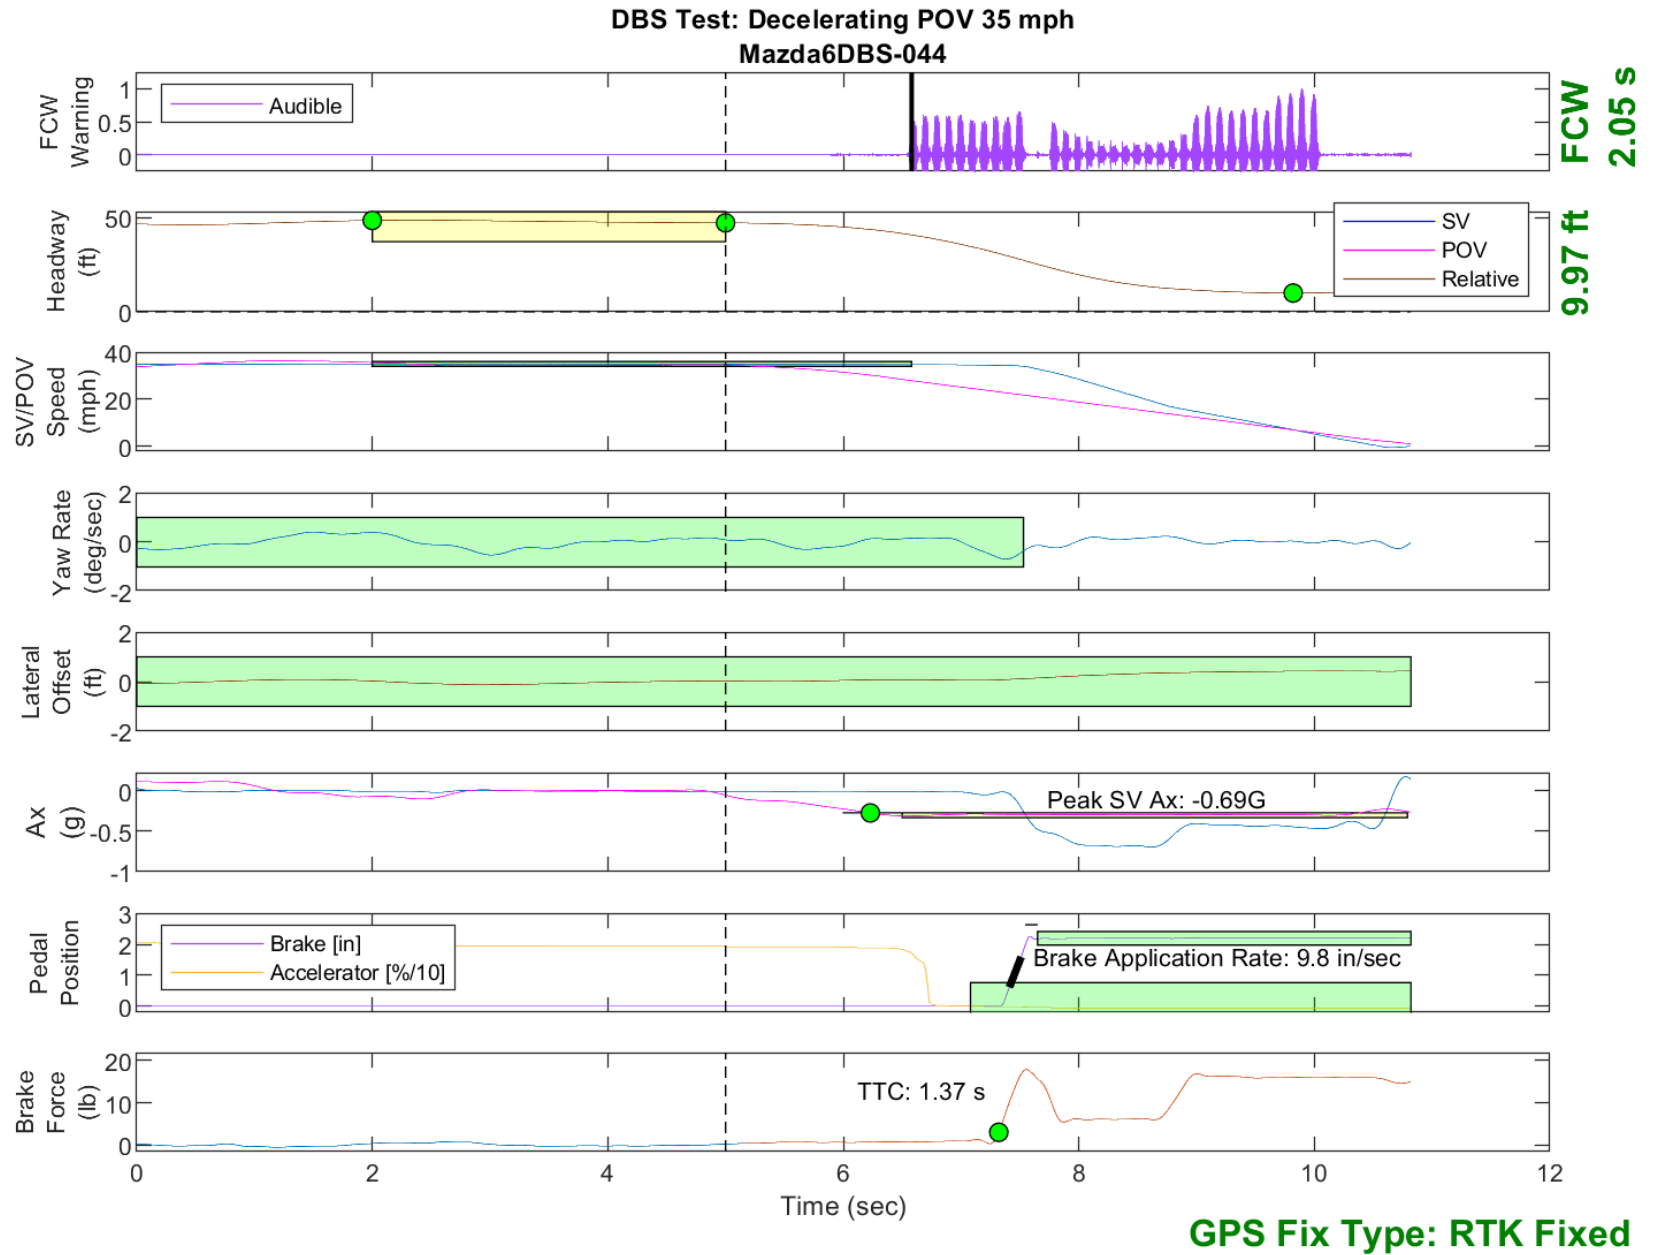


Figure E34. Time History for DBS Run 44, SV Encounters Decelerating POV, SV 35 mph, POV 35 mph



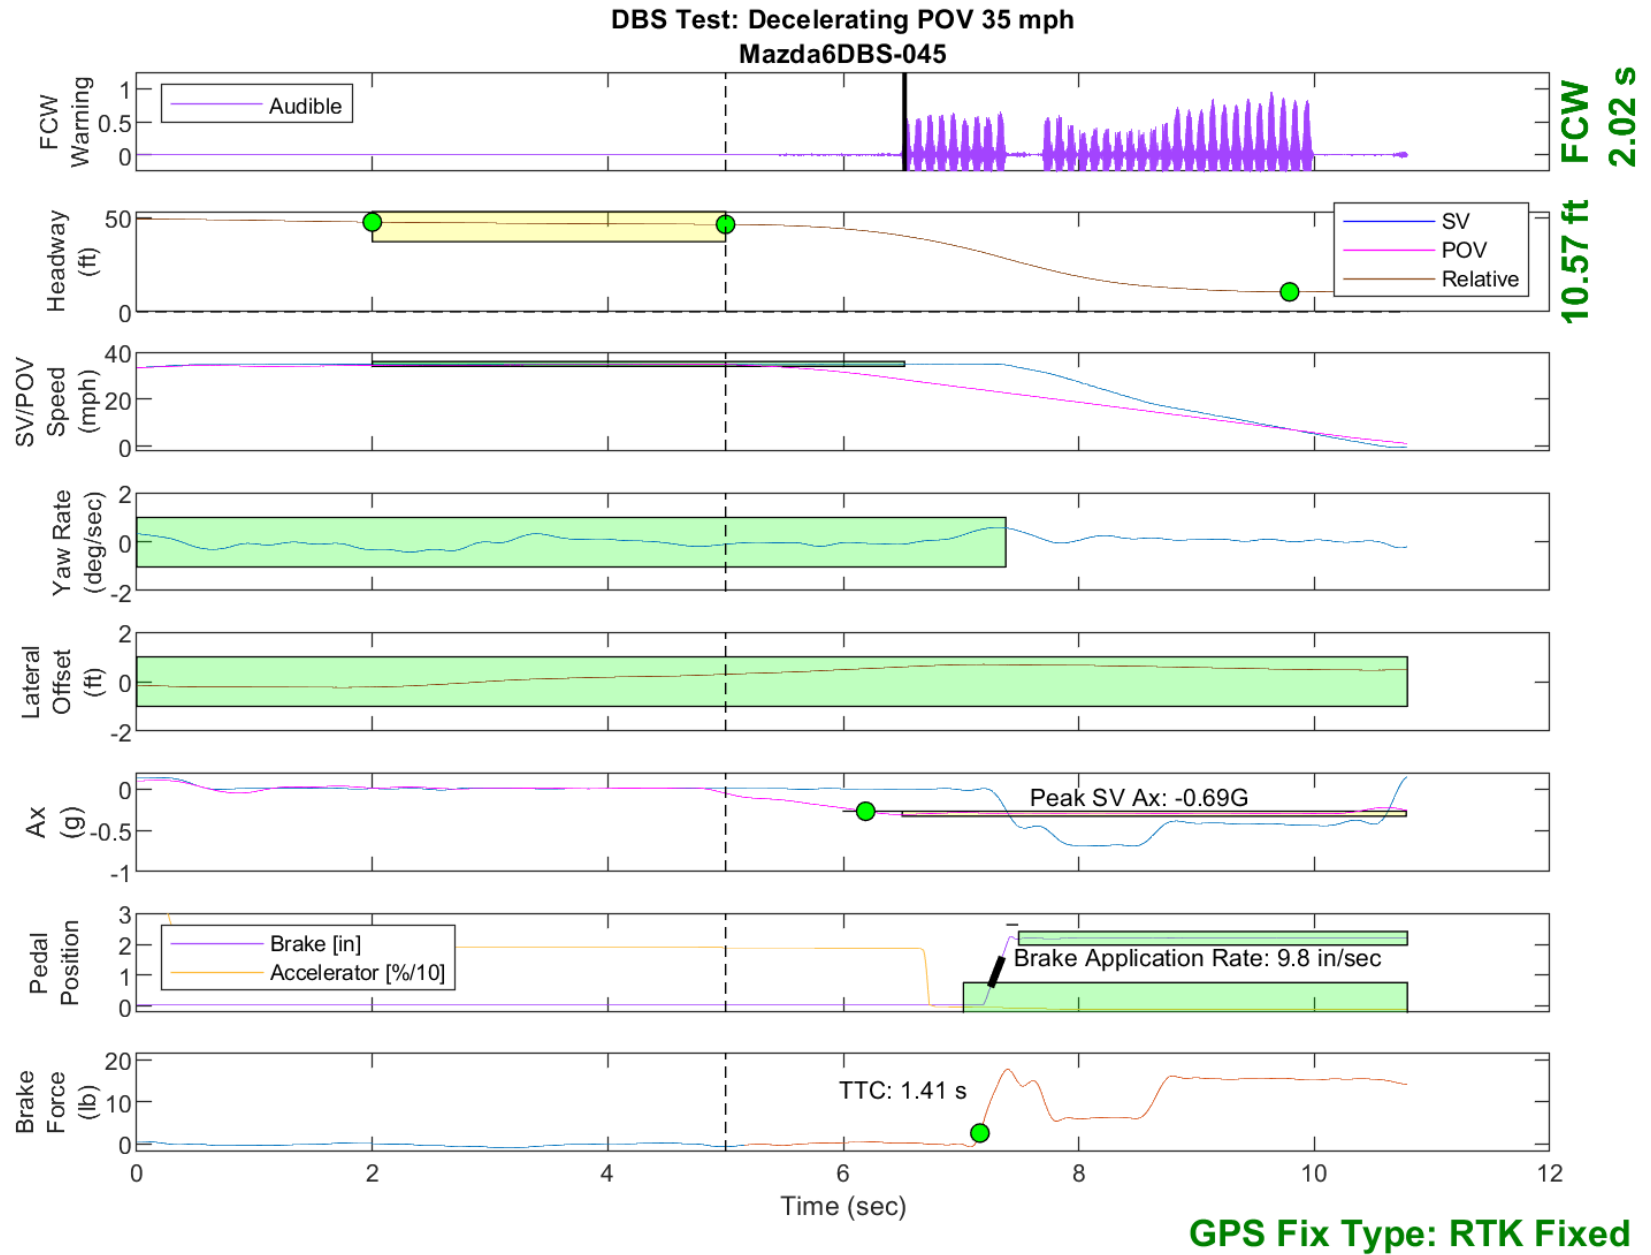


Figure E35. Time History for DBS Run 45, SV Encounters Decelerating POV, SV 35 mph, POV 35 mph

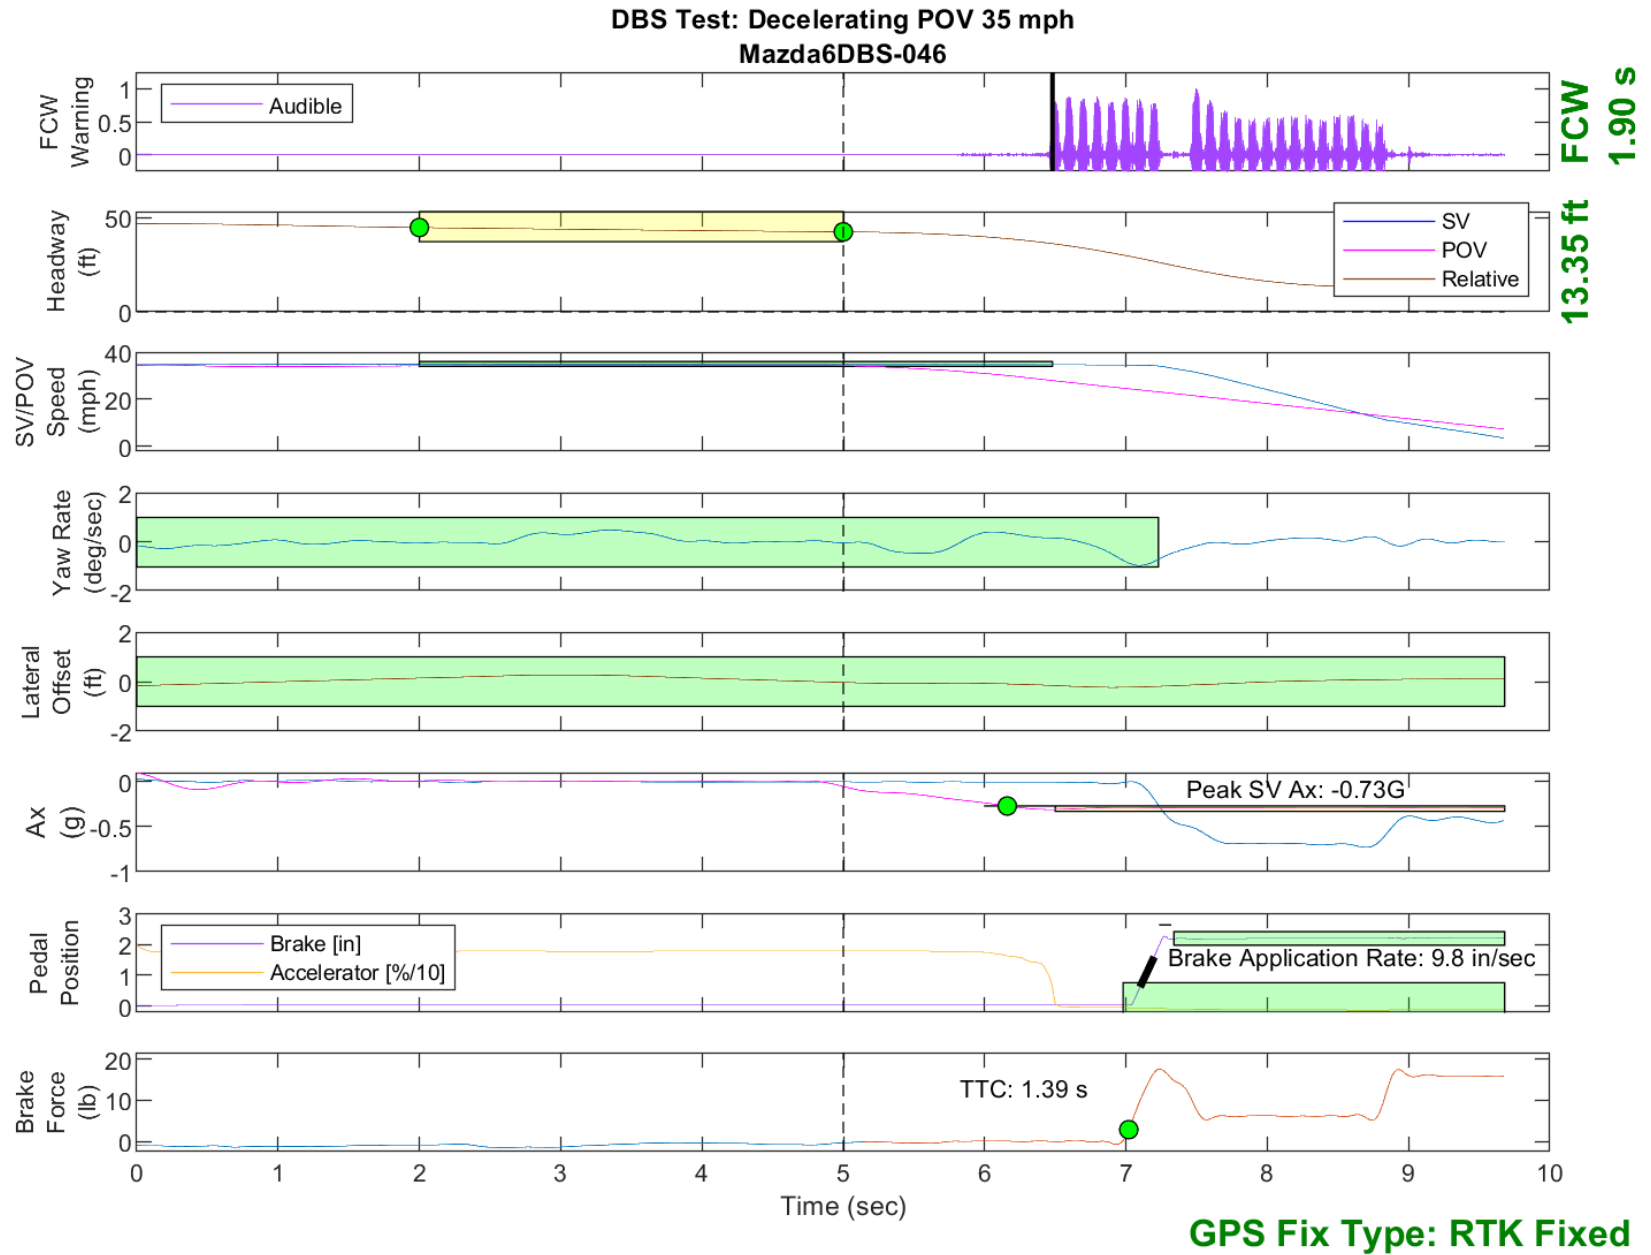


Figure E36. Time History for DBS Run 46, SV Encounters Decelerating POV, SV 35 mph, POV 35 mph

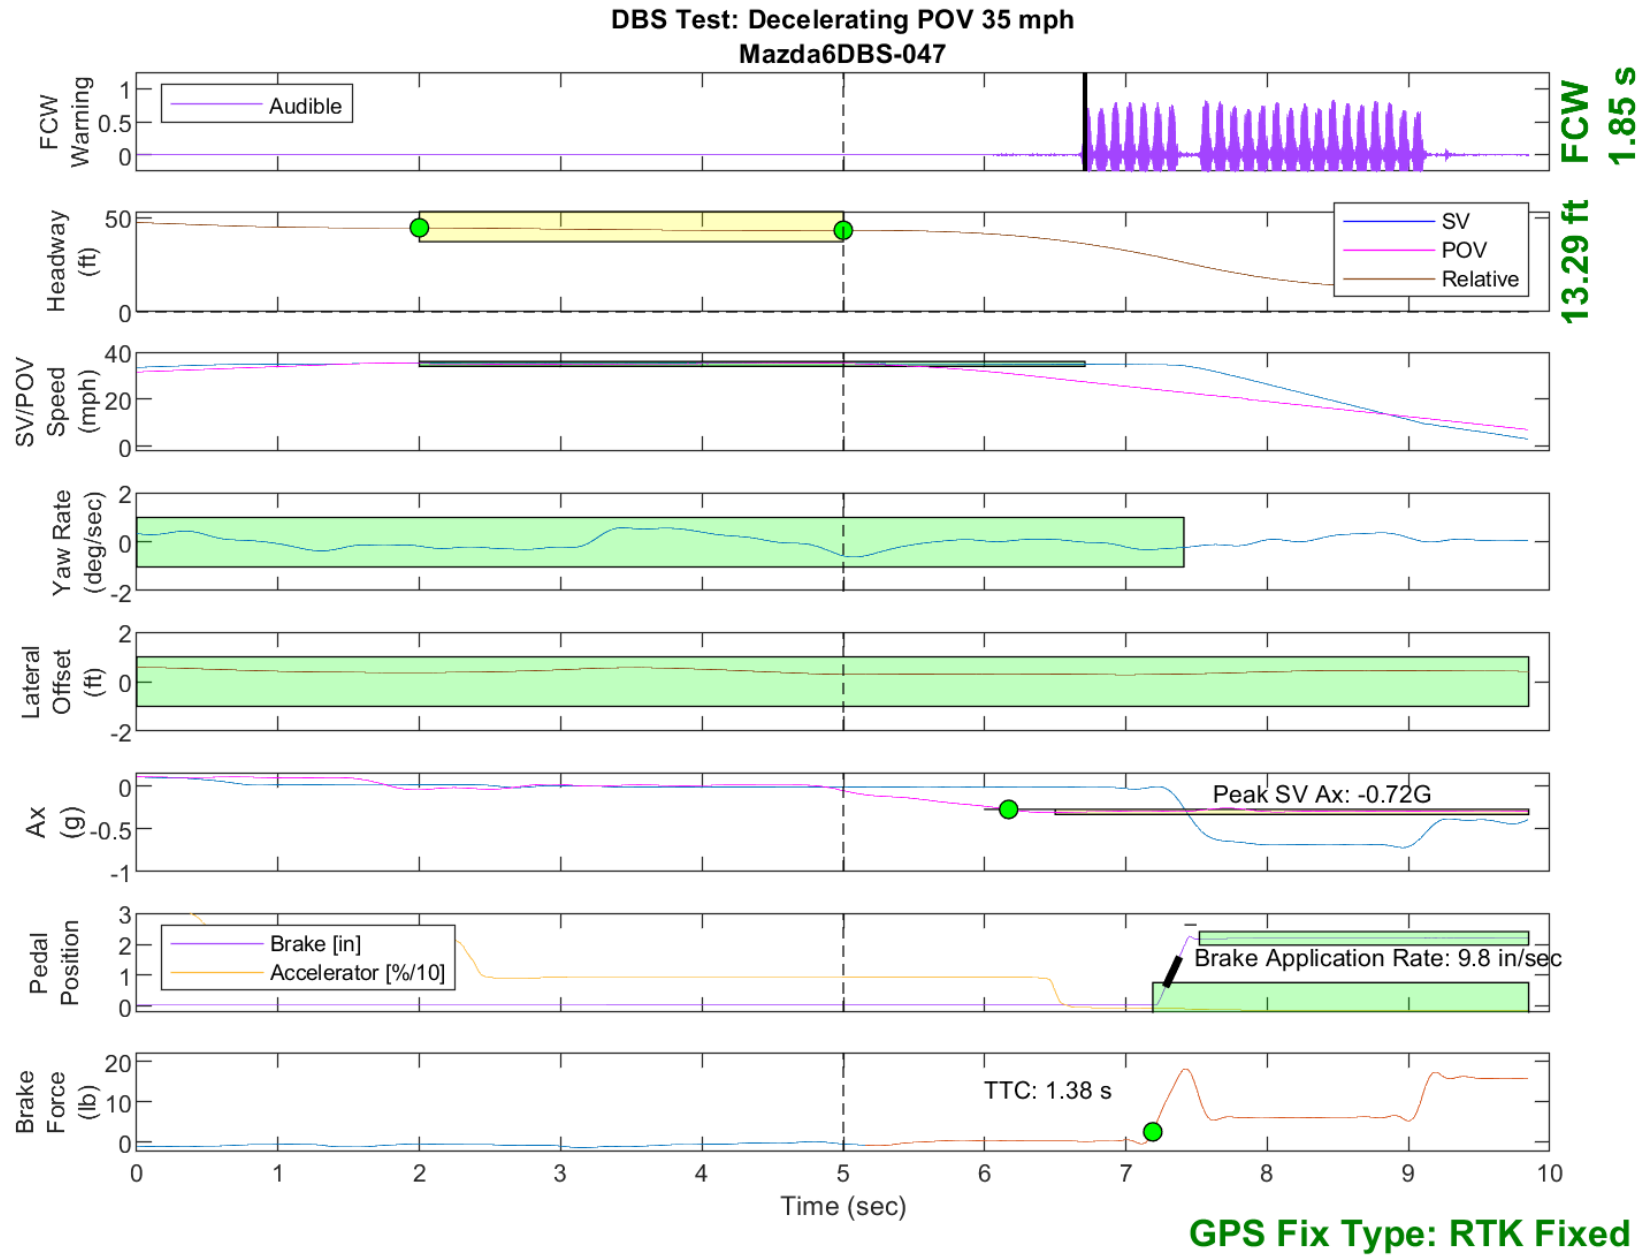


Figure E37. Time History for DBS Run 47, SV Encounters Decelerating POV, SV 35 mph, POV 35 mph

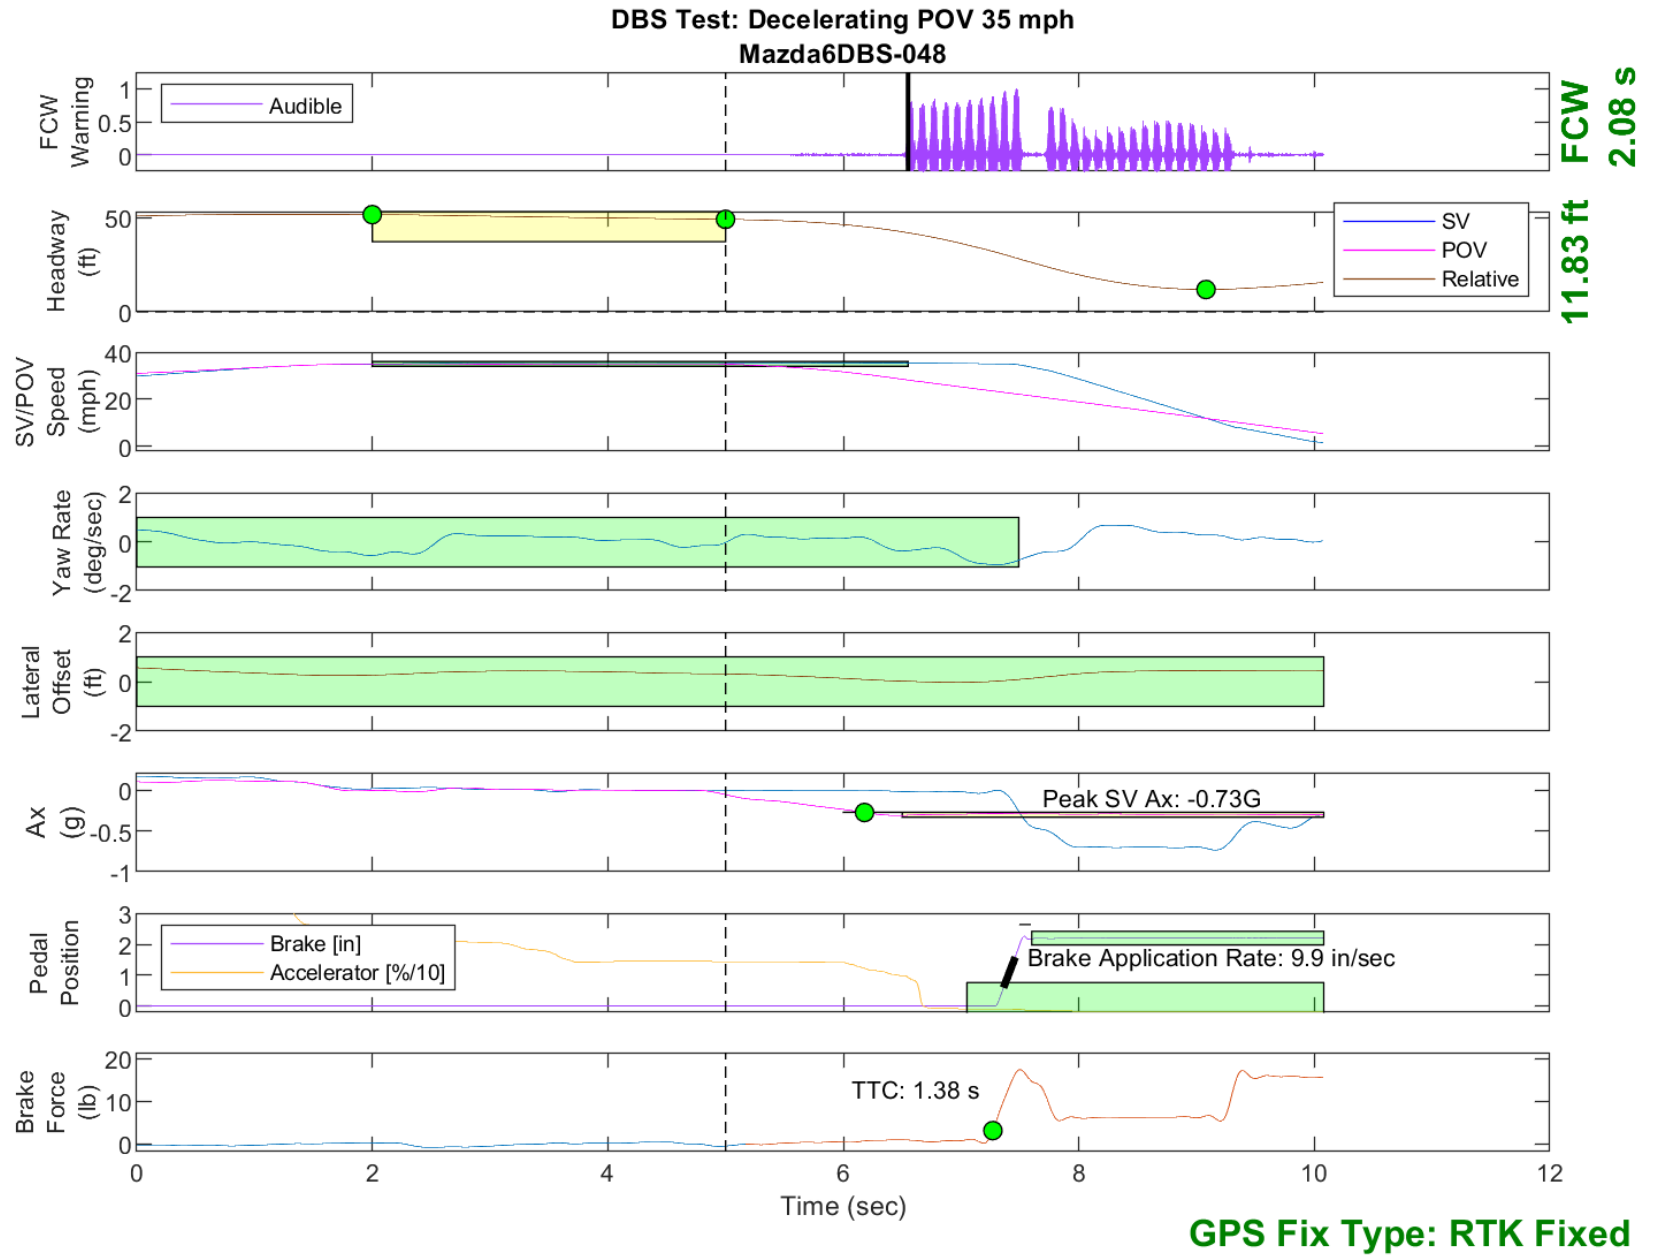


Figure E38. Time History for DBS Run 48, SV Encounters Decelerating POV, SV 35 mph, POV 35 mph

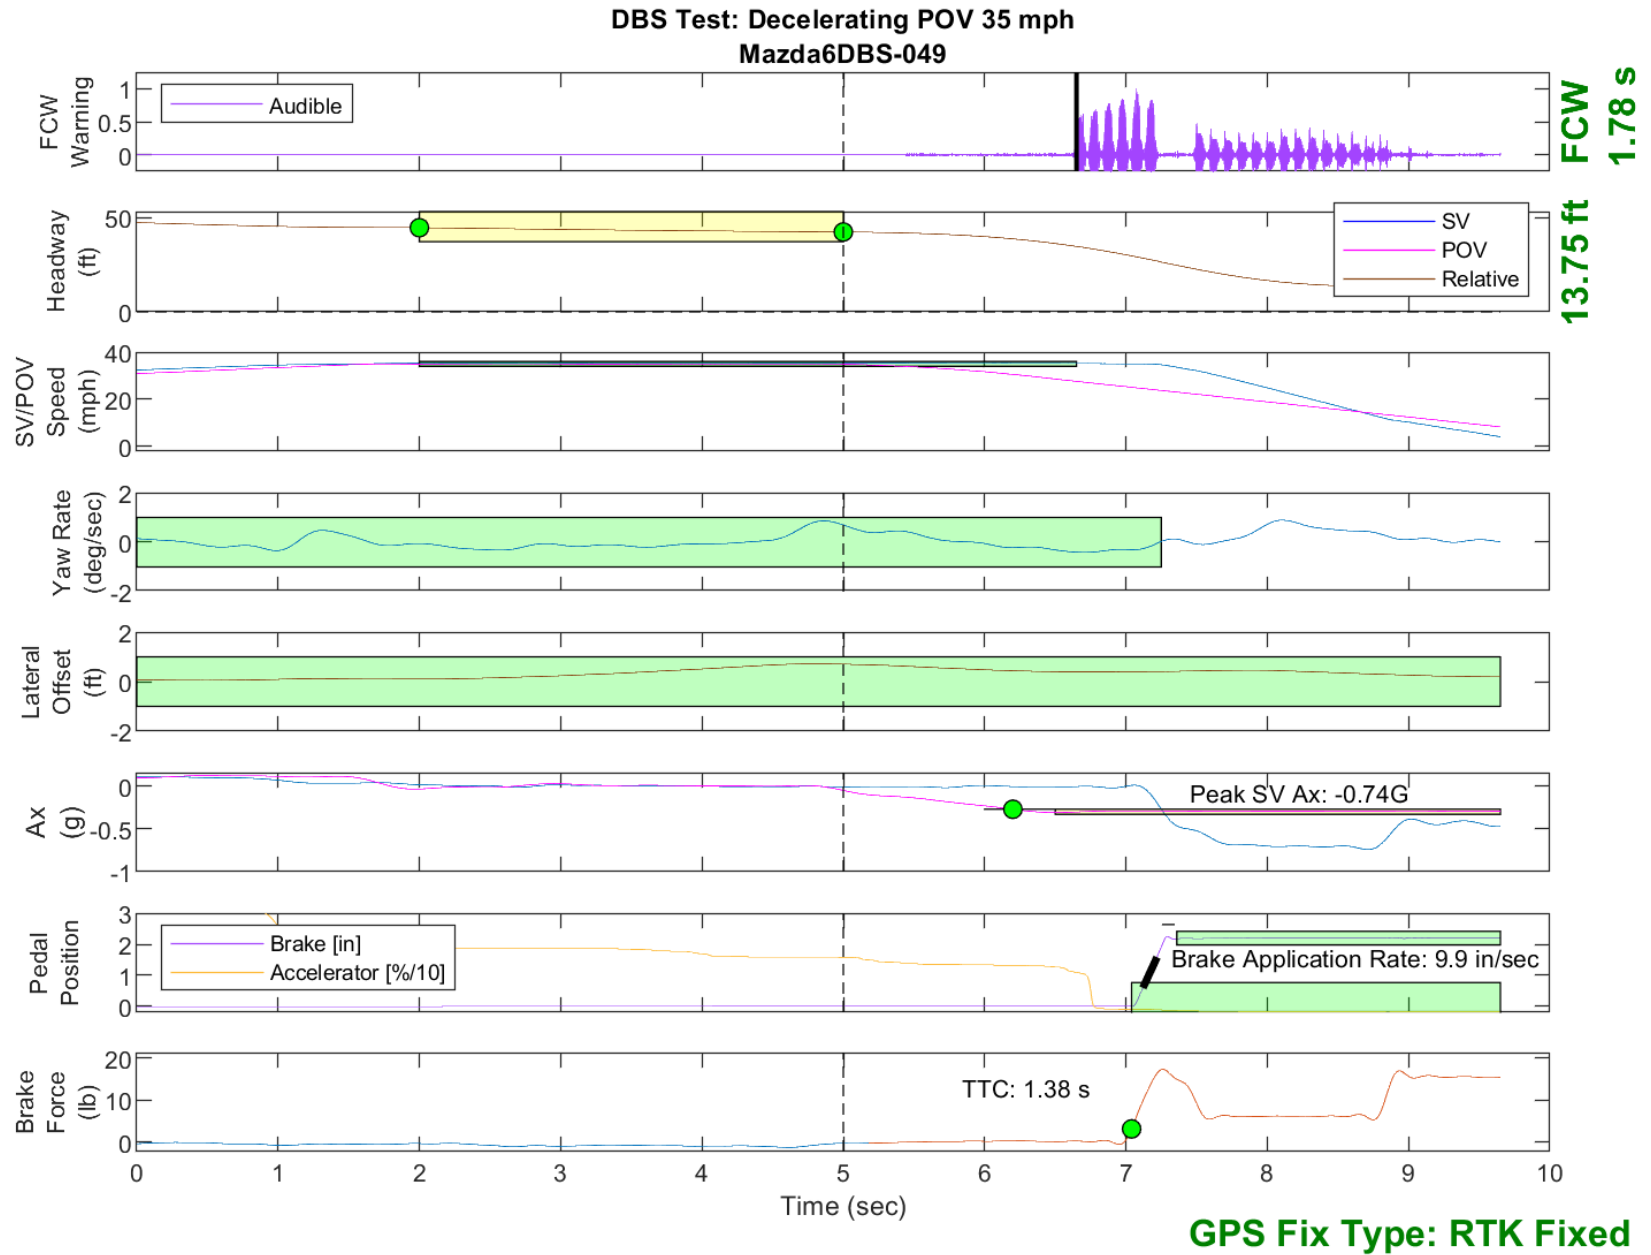


Figure E39. Time History for DBS Run 49, SV Encounters Decelerating POV, SV 35 mph, POV 35 mph

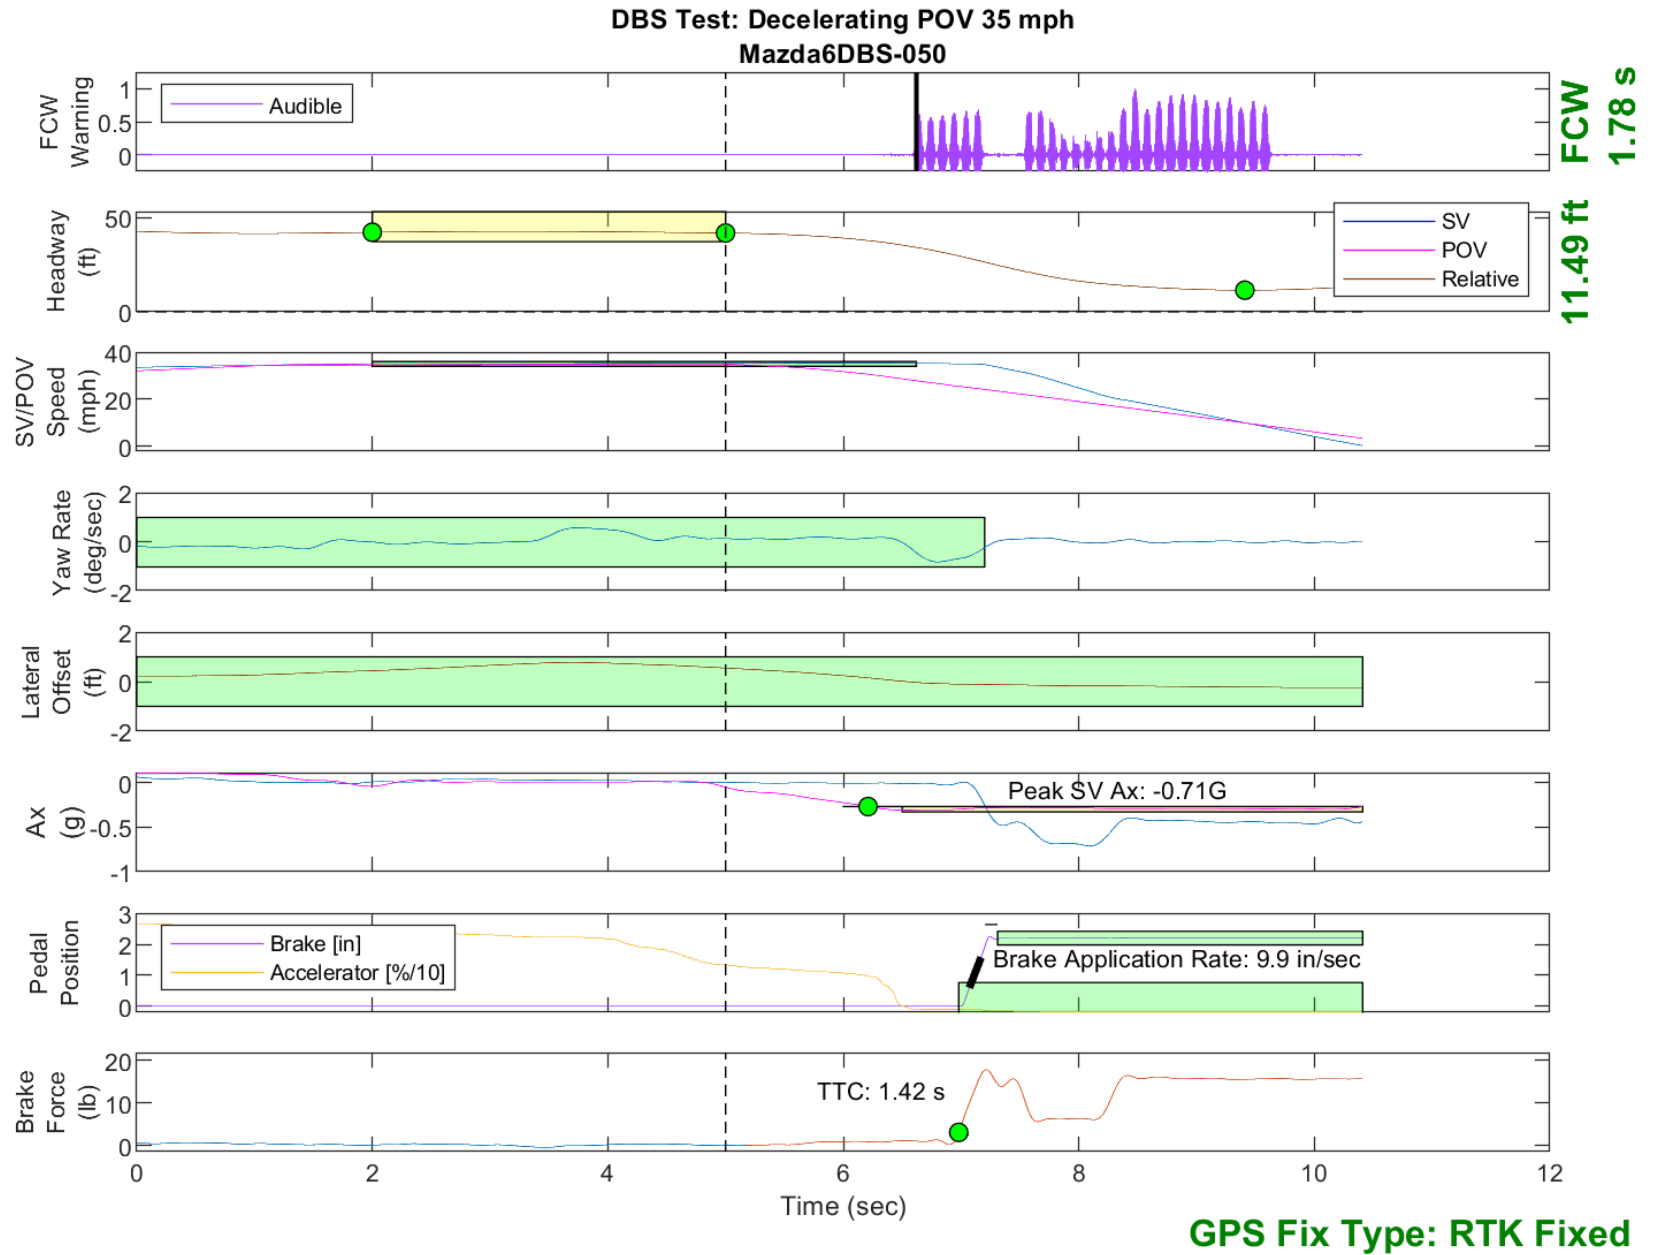


Figure E40. Time History for DBS Run 50, SV Encounters Decelerating POV, SV 35 mph, POV 35 mph

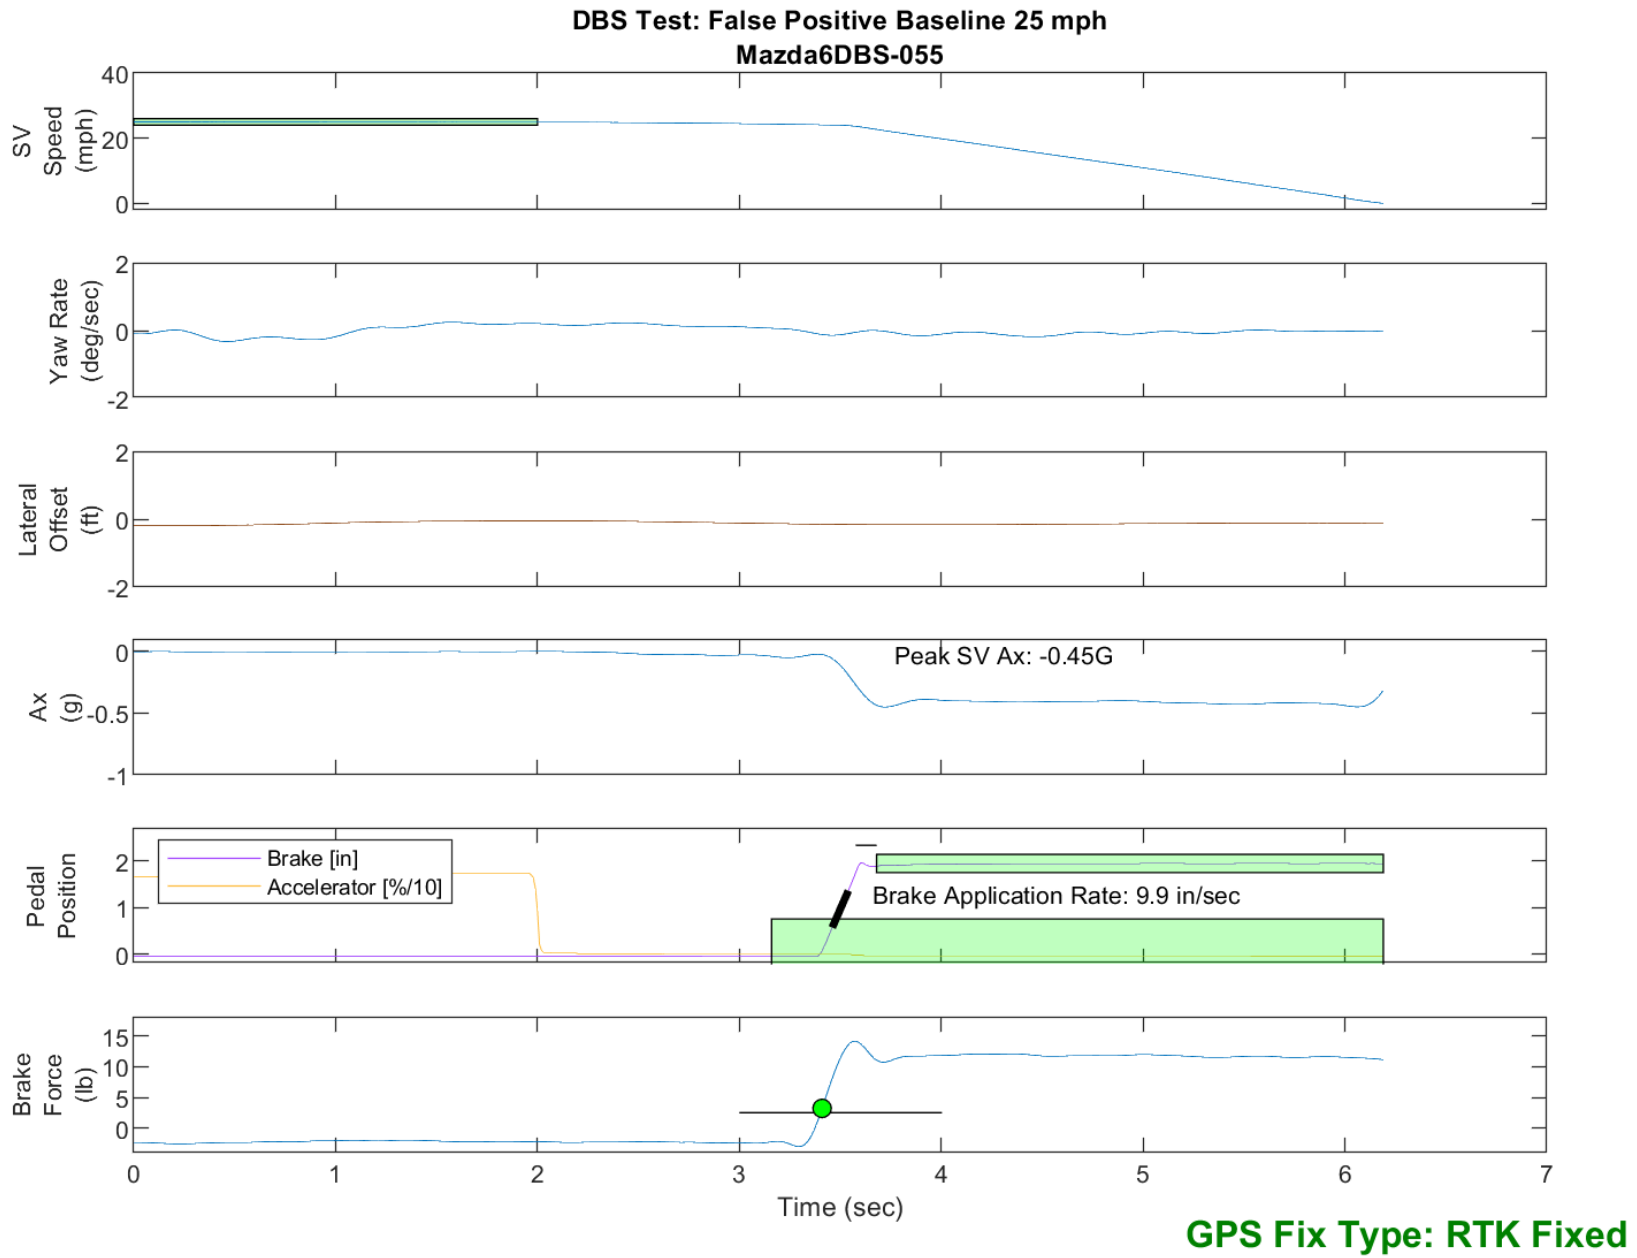


Figure E41. Time History for DBS Run 55, False Positive Baseline, SV 25 mph

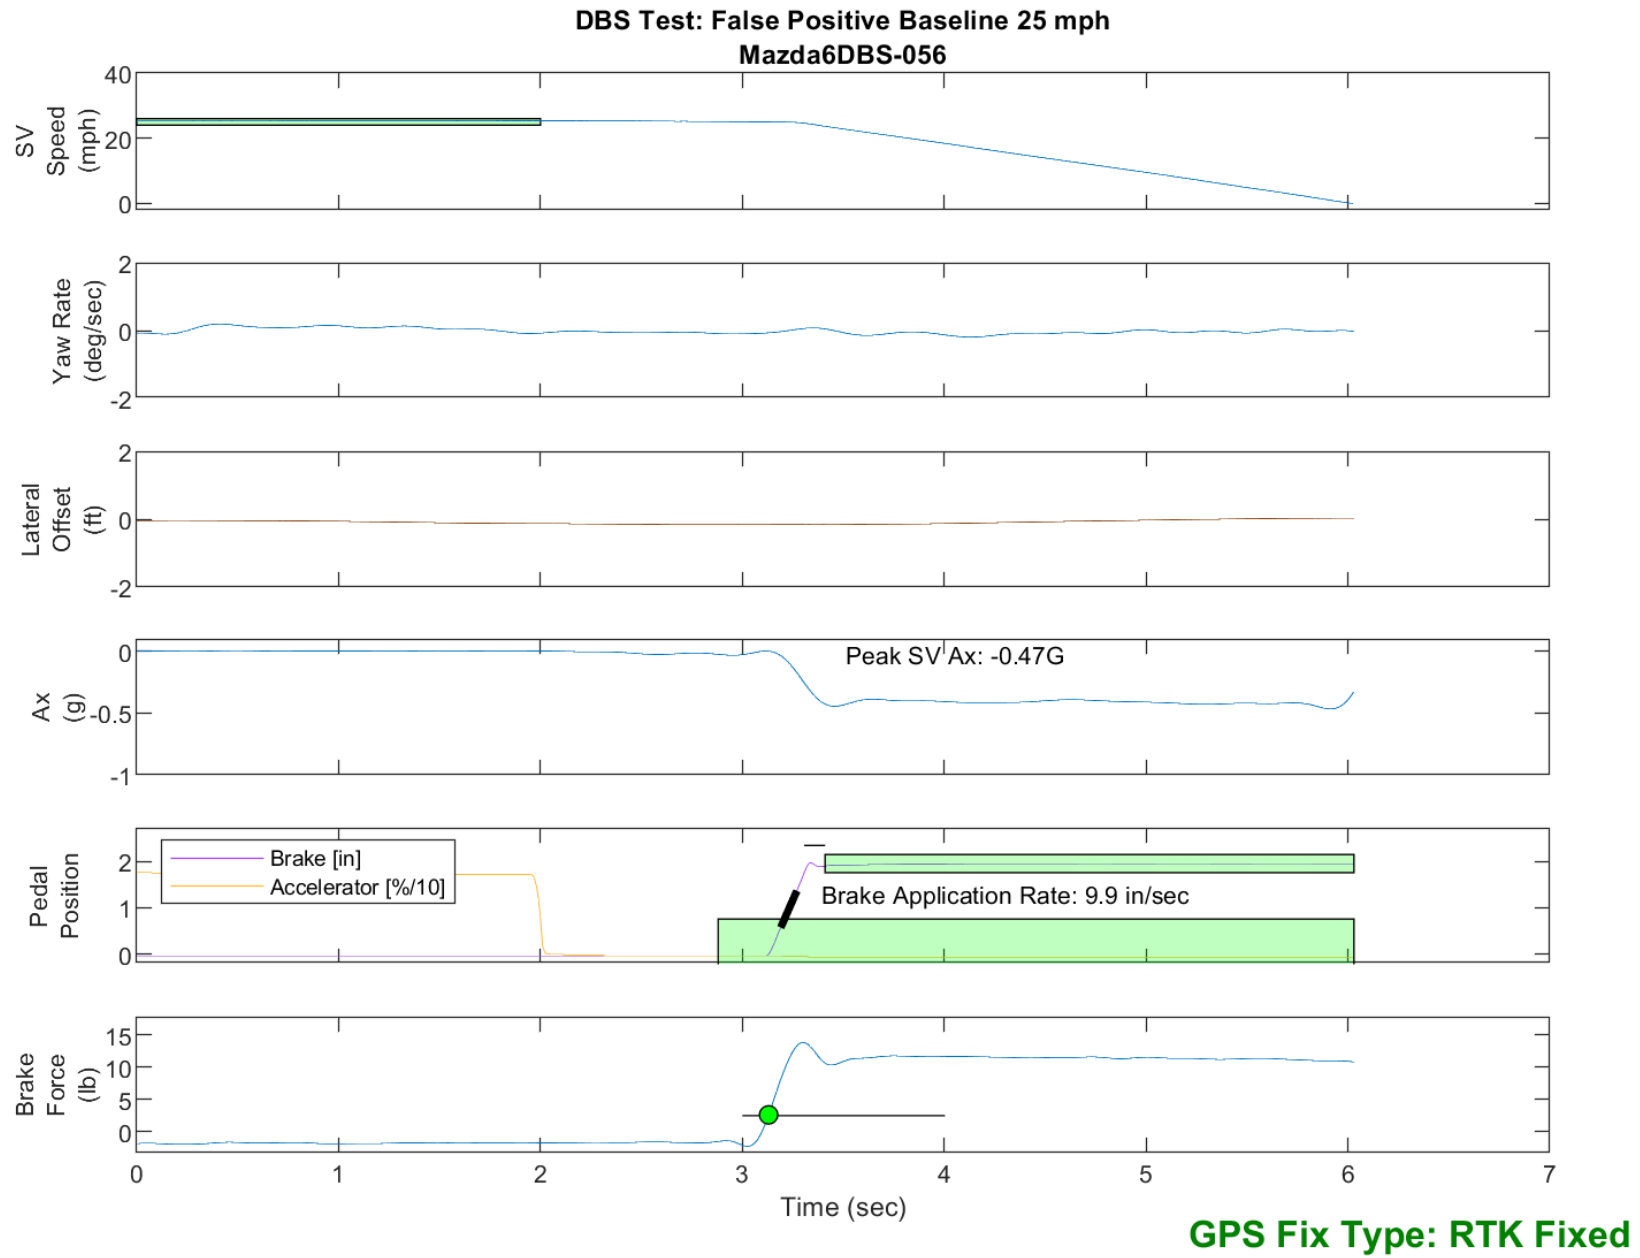


Figure E42. Time History for DBS Run 56, False Positive Baseline, SV 25 mph



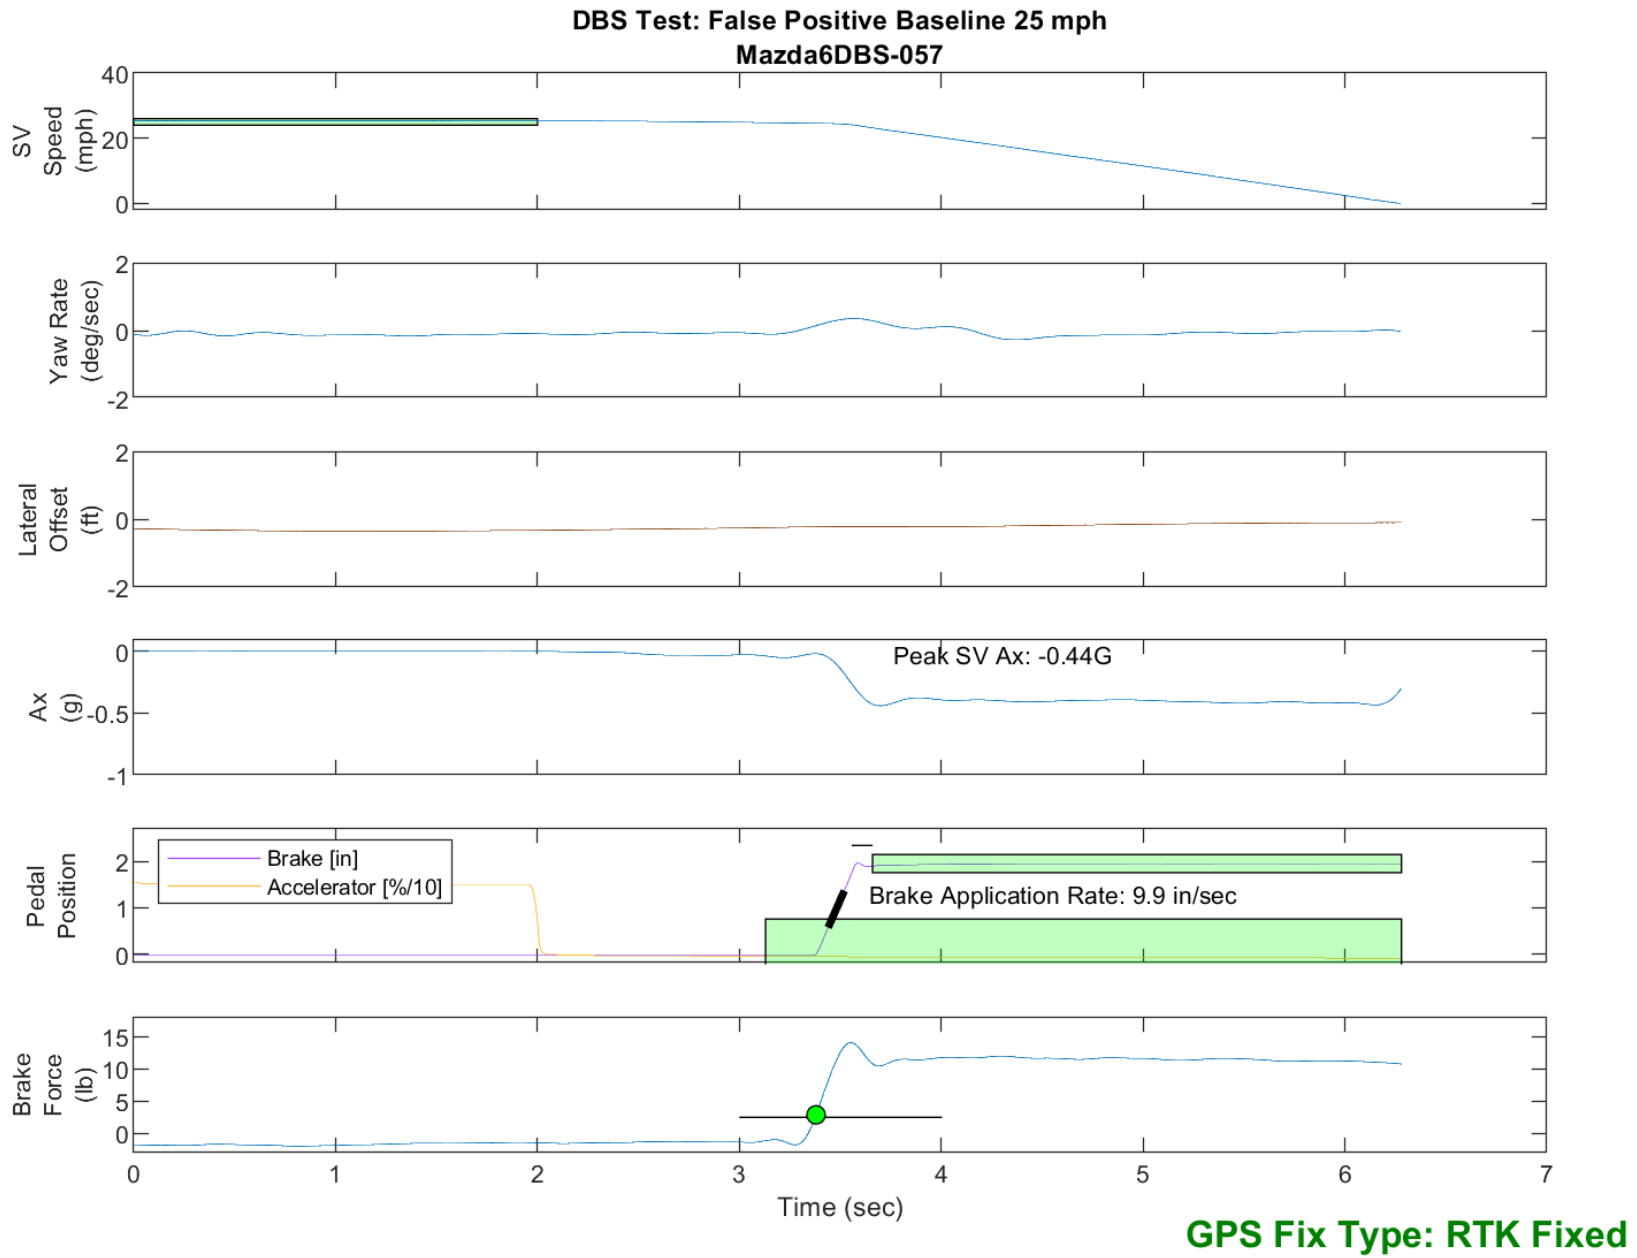


Figure E43. Time History for DBS Run 57, False Positive Baseline, SV 25 mph

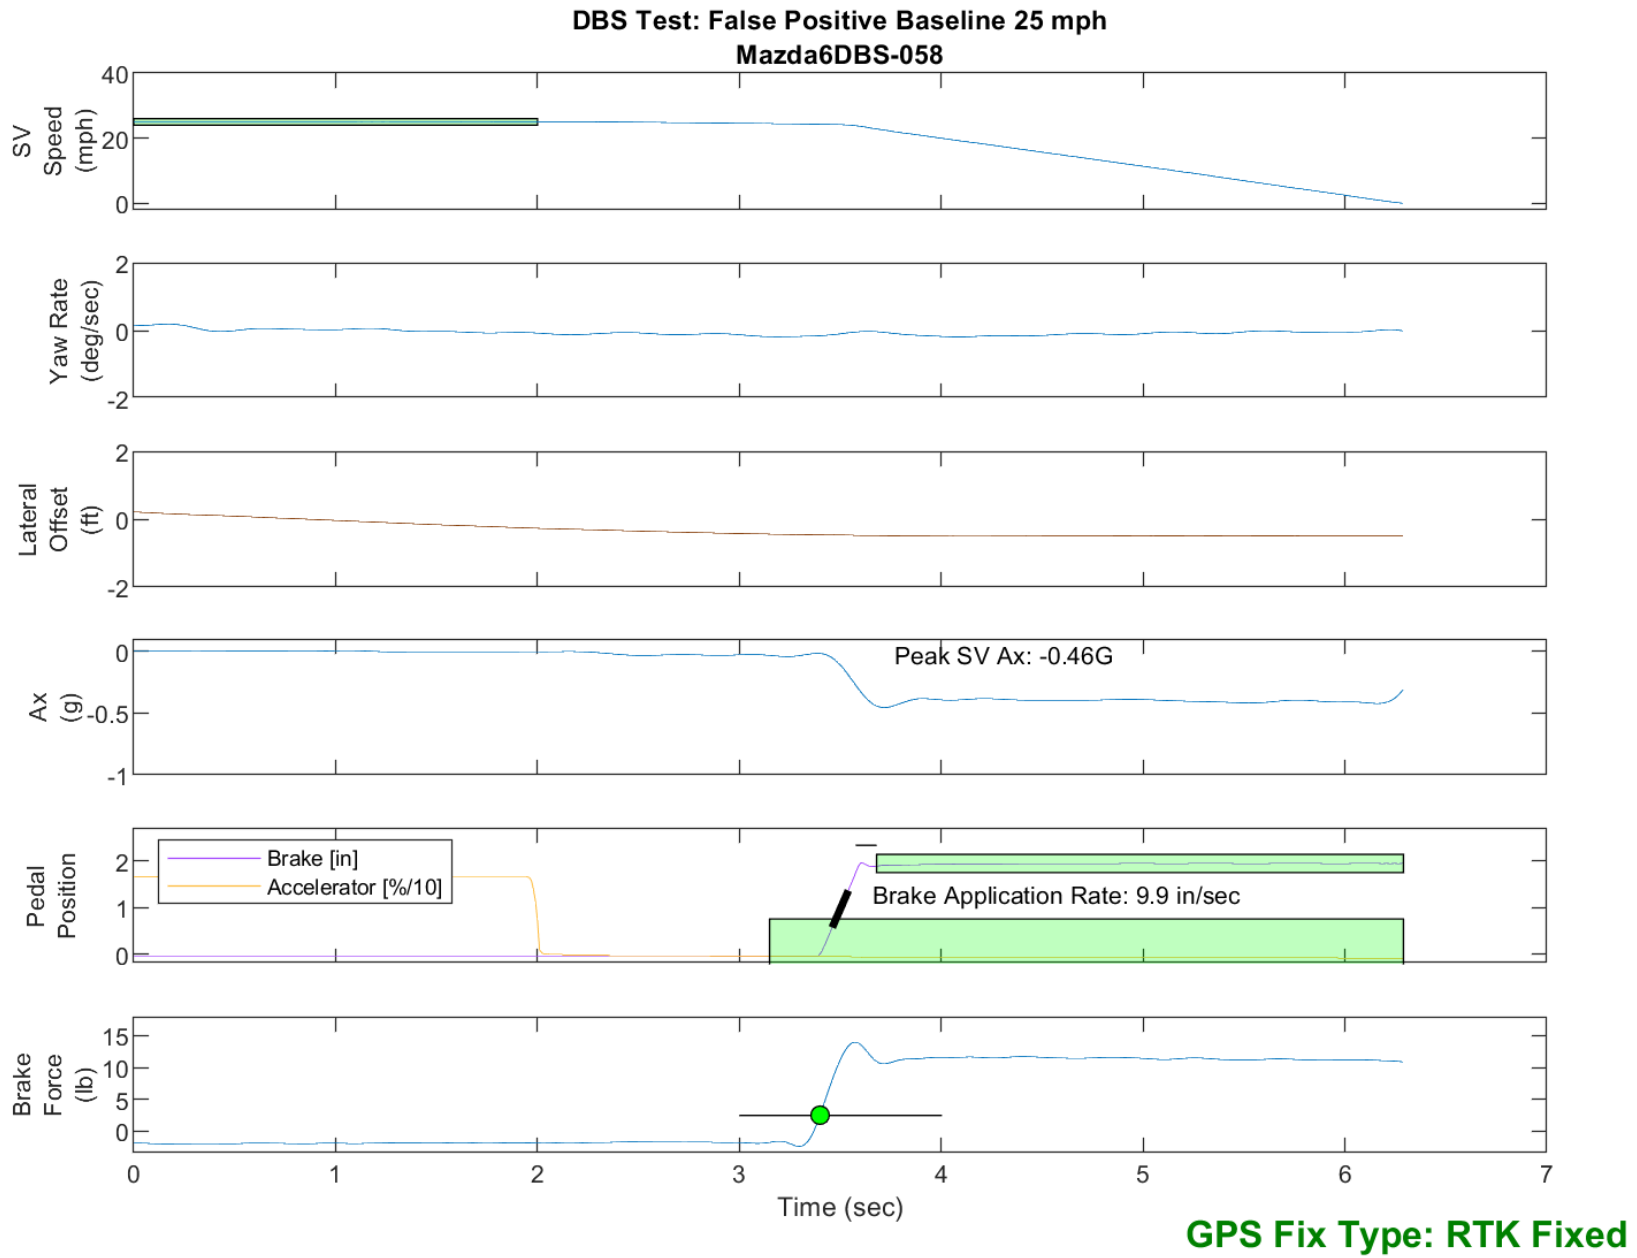


Figure E44. Time History for DBS Run 58, False Positive Baseline, SV 25 mph

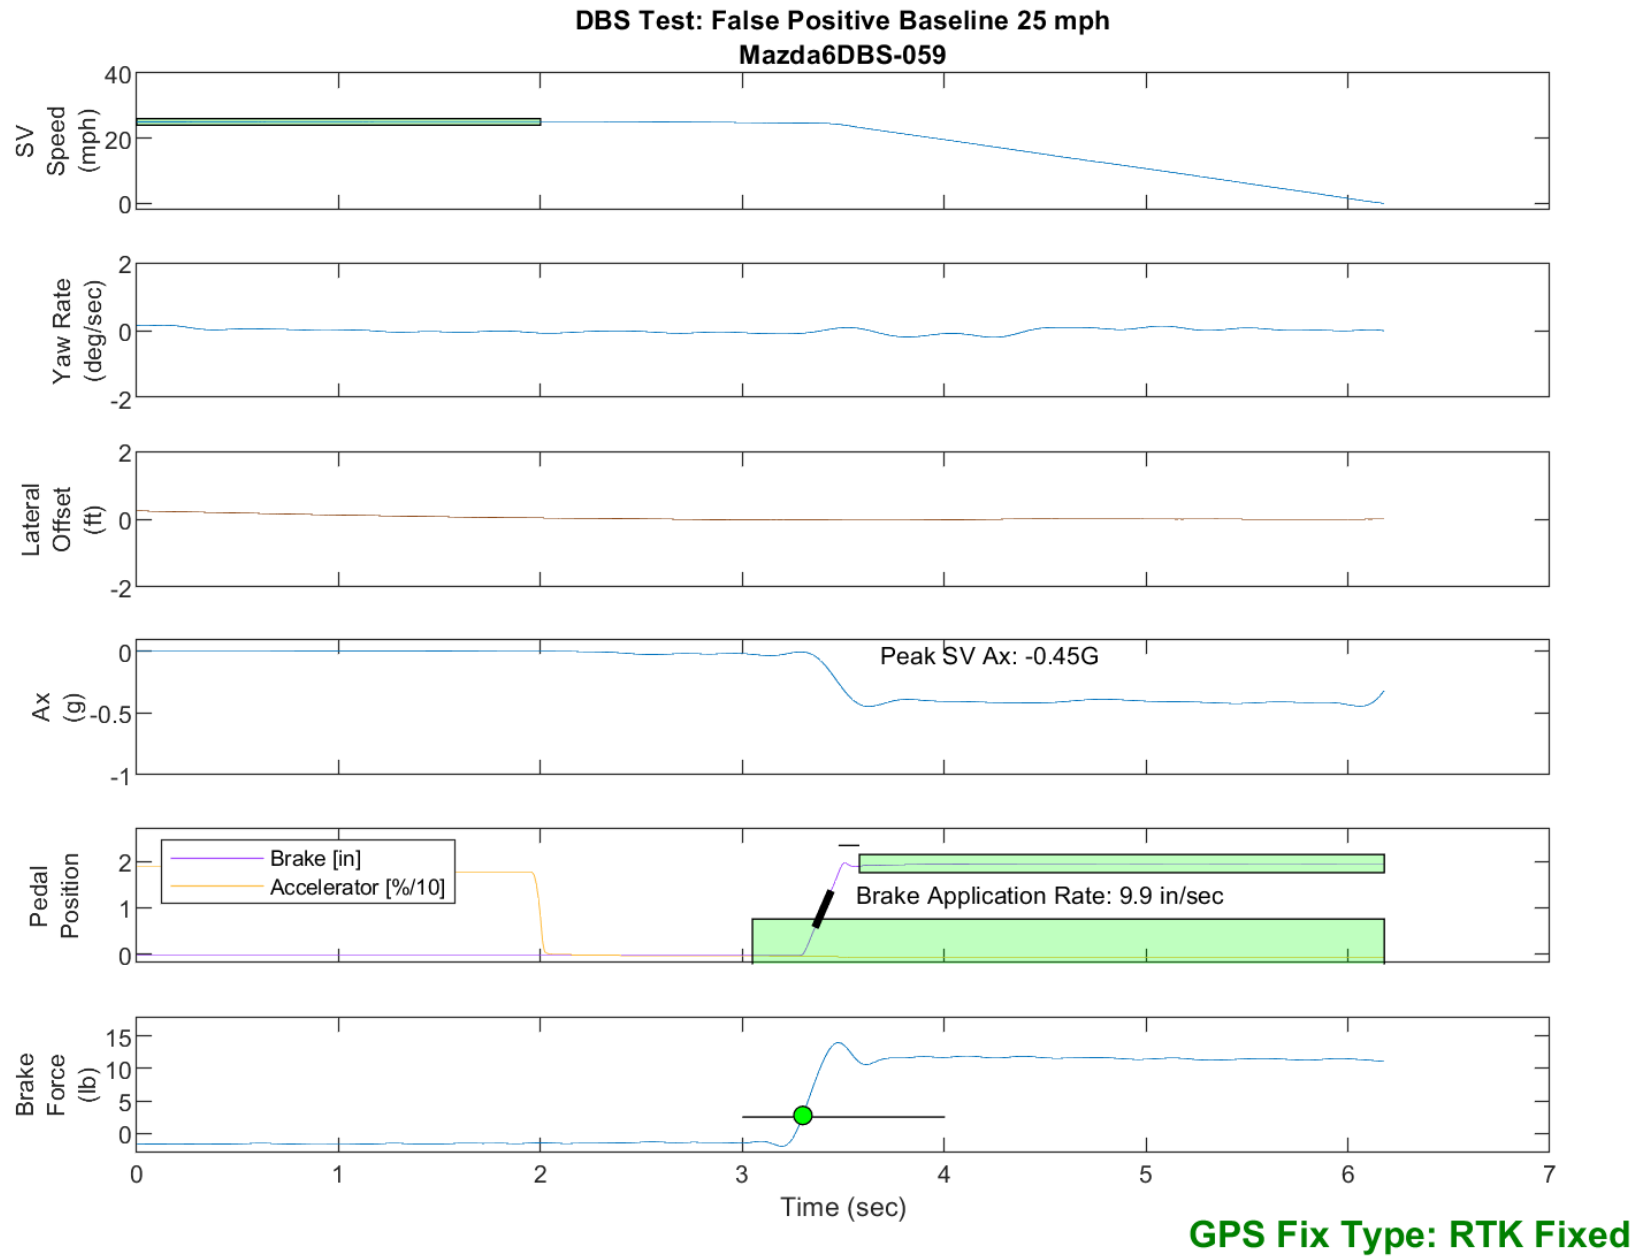


Figure E45. Time History for DBS Run 59, False Positive Baseline, SV 25 mph

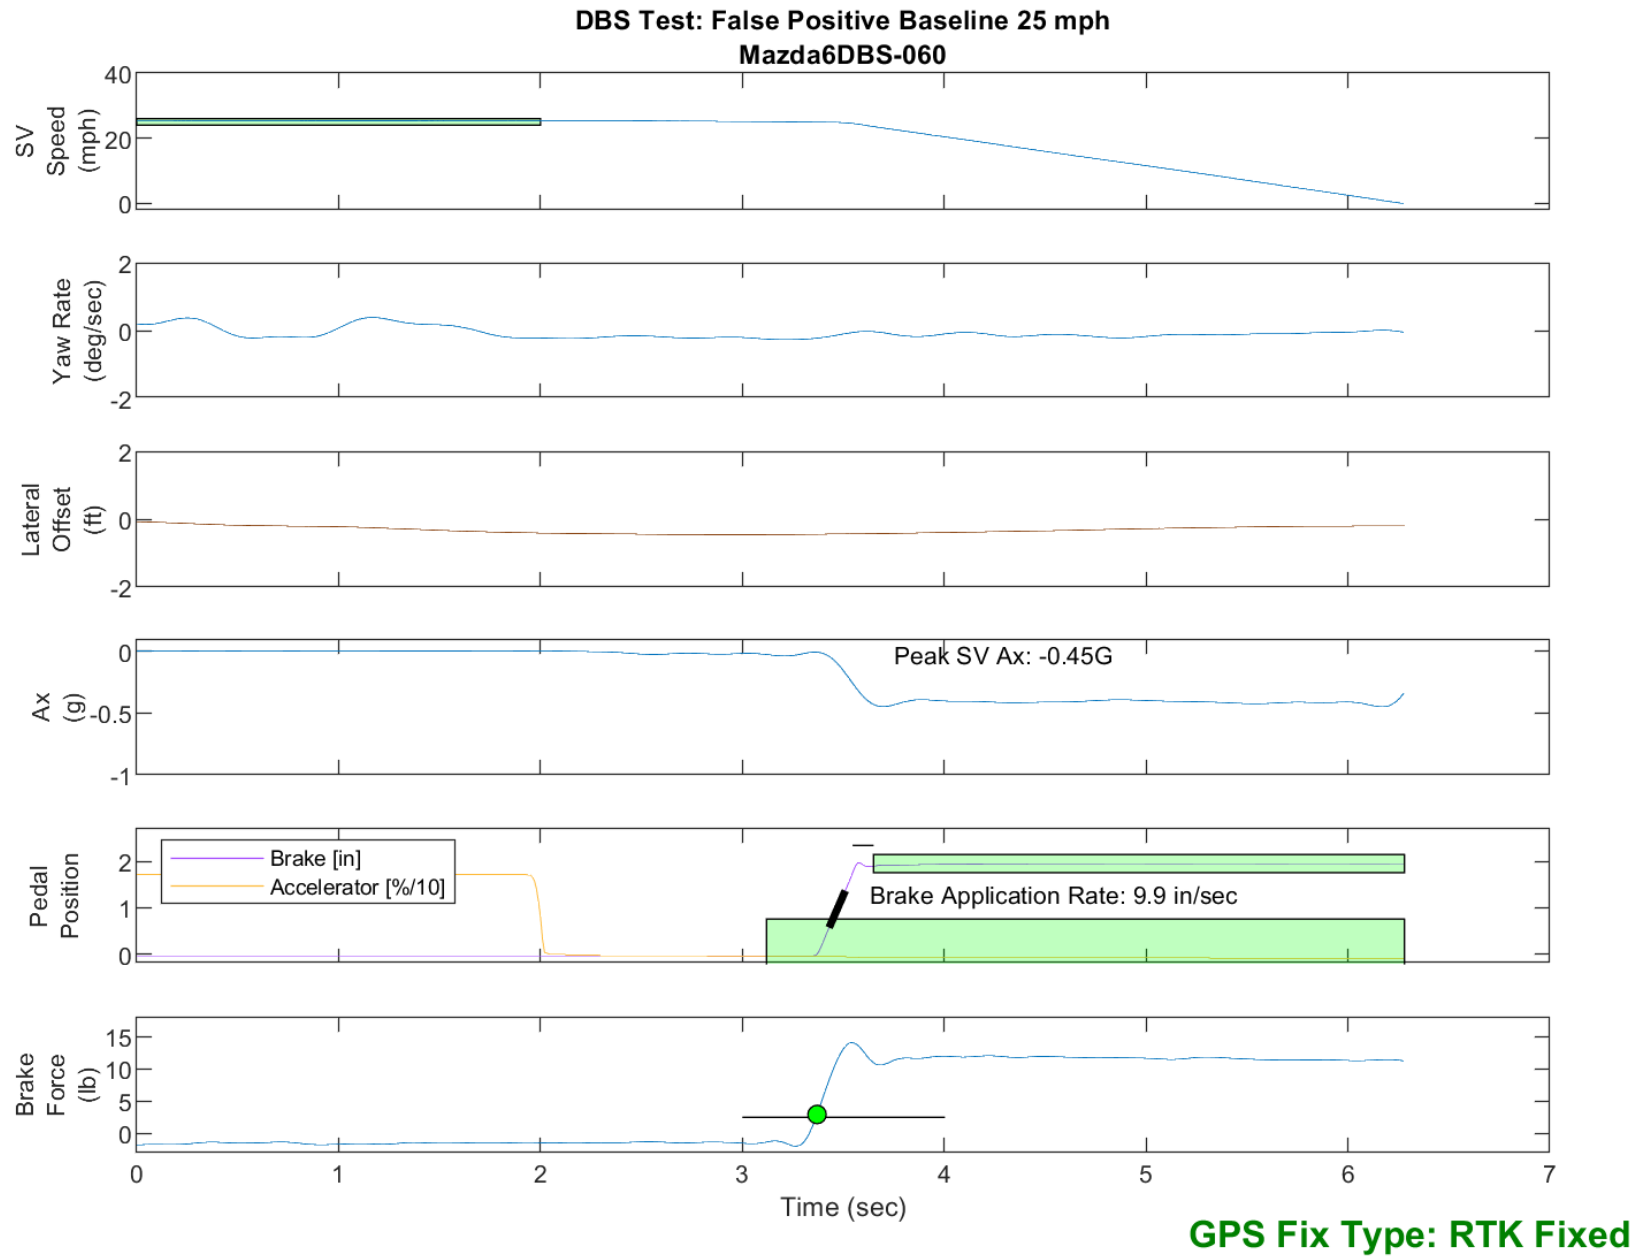


Figure E46. Time History for DBS Run 60, False Positive Baseline, SV 25 mph

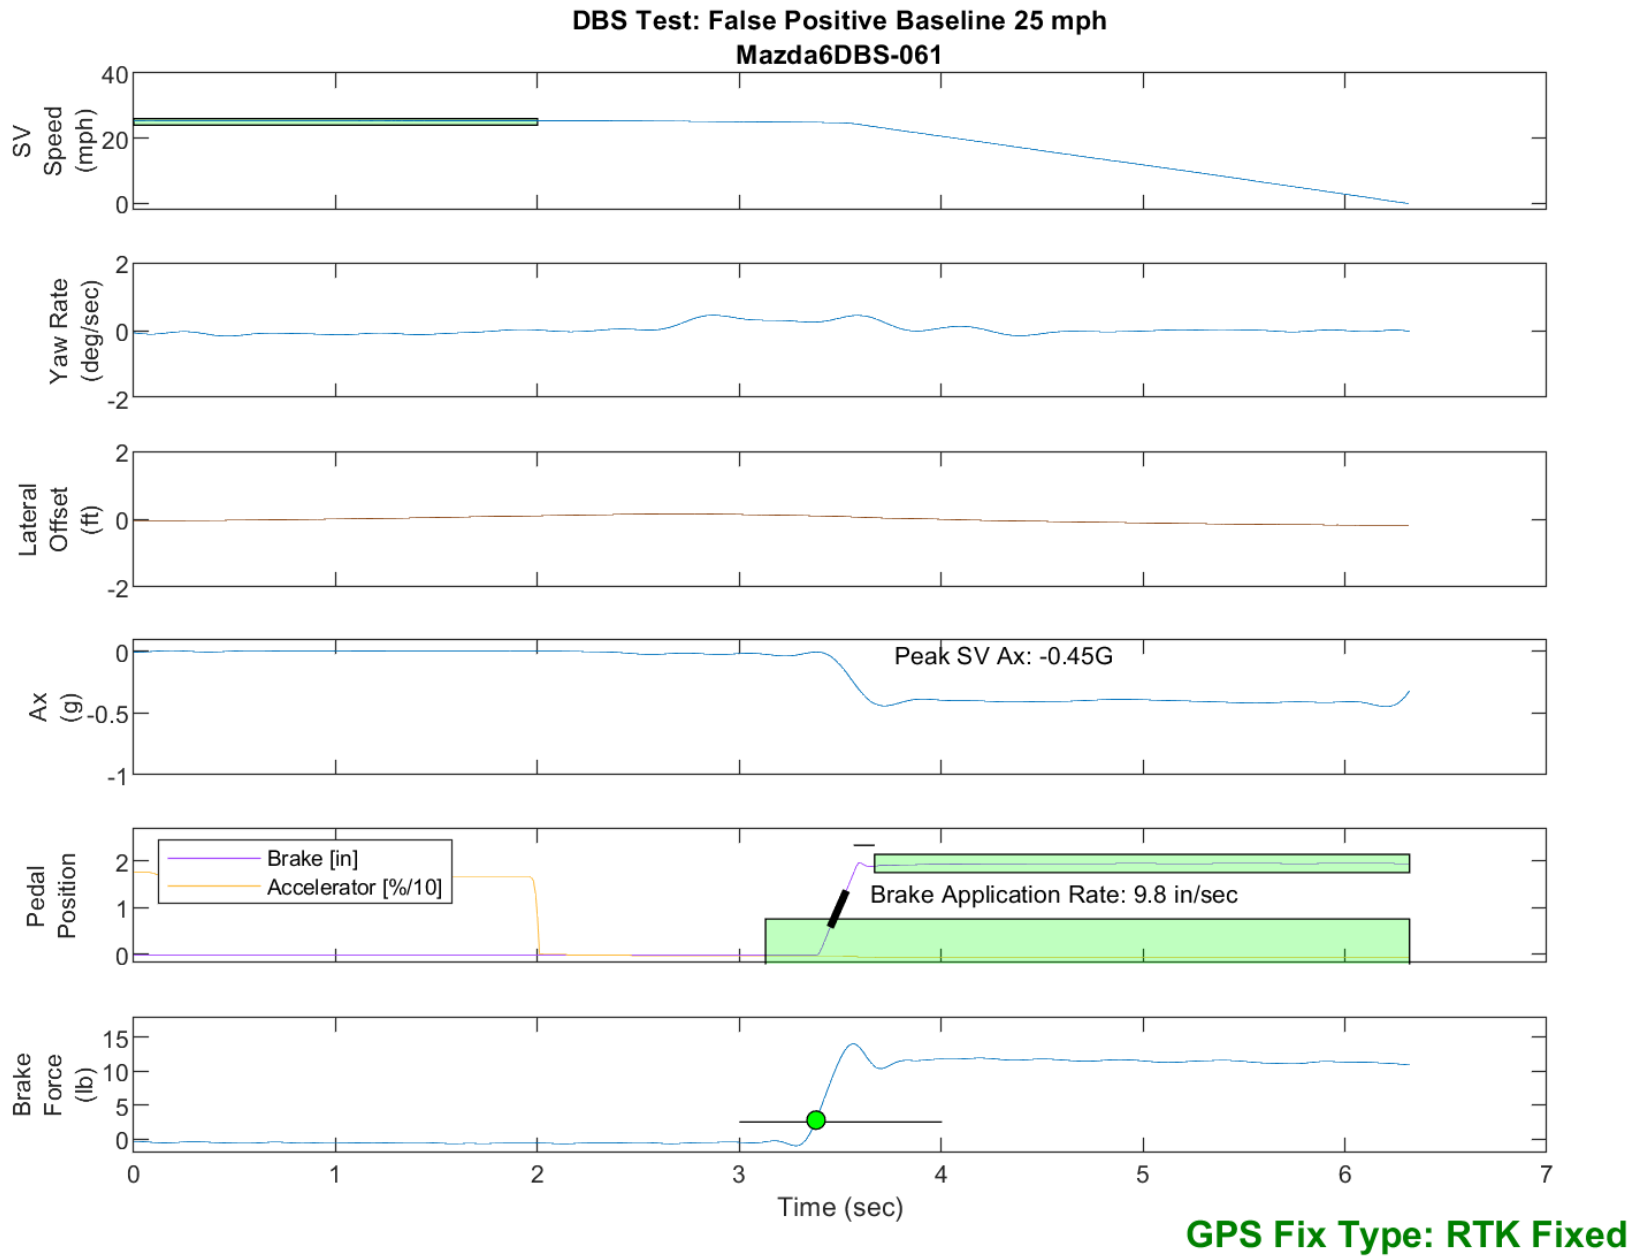


Figure E47. Time History for DBS Run 61, False Positive Baseline, SV 25 mph

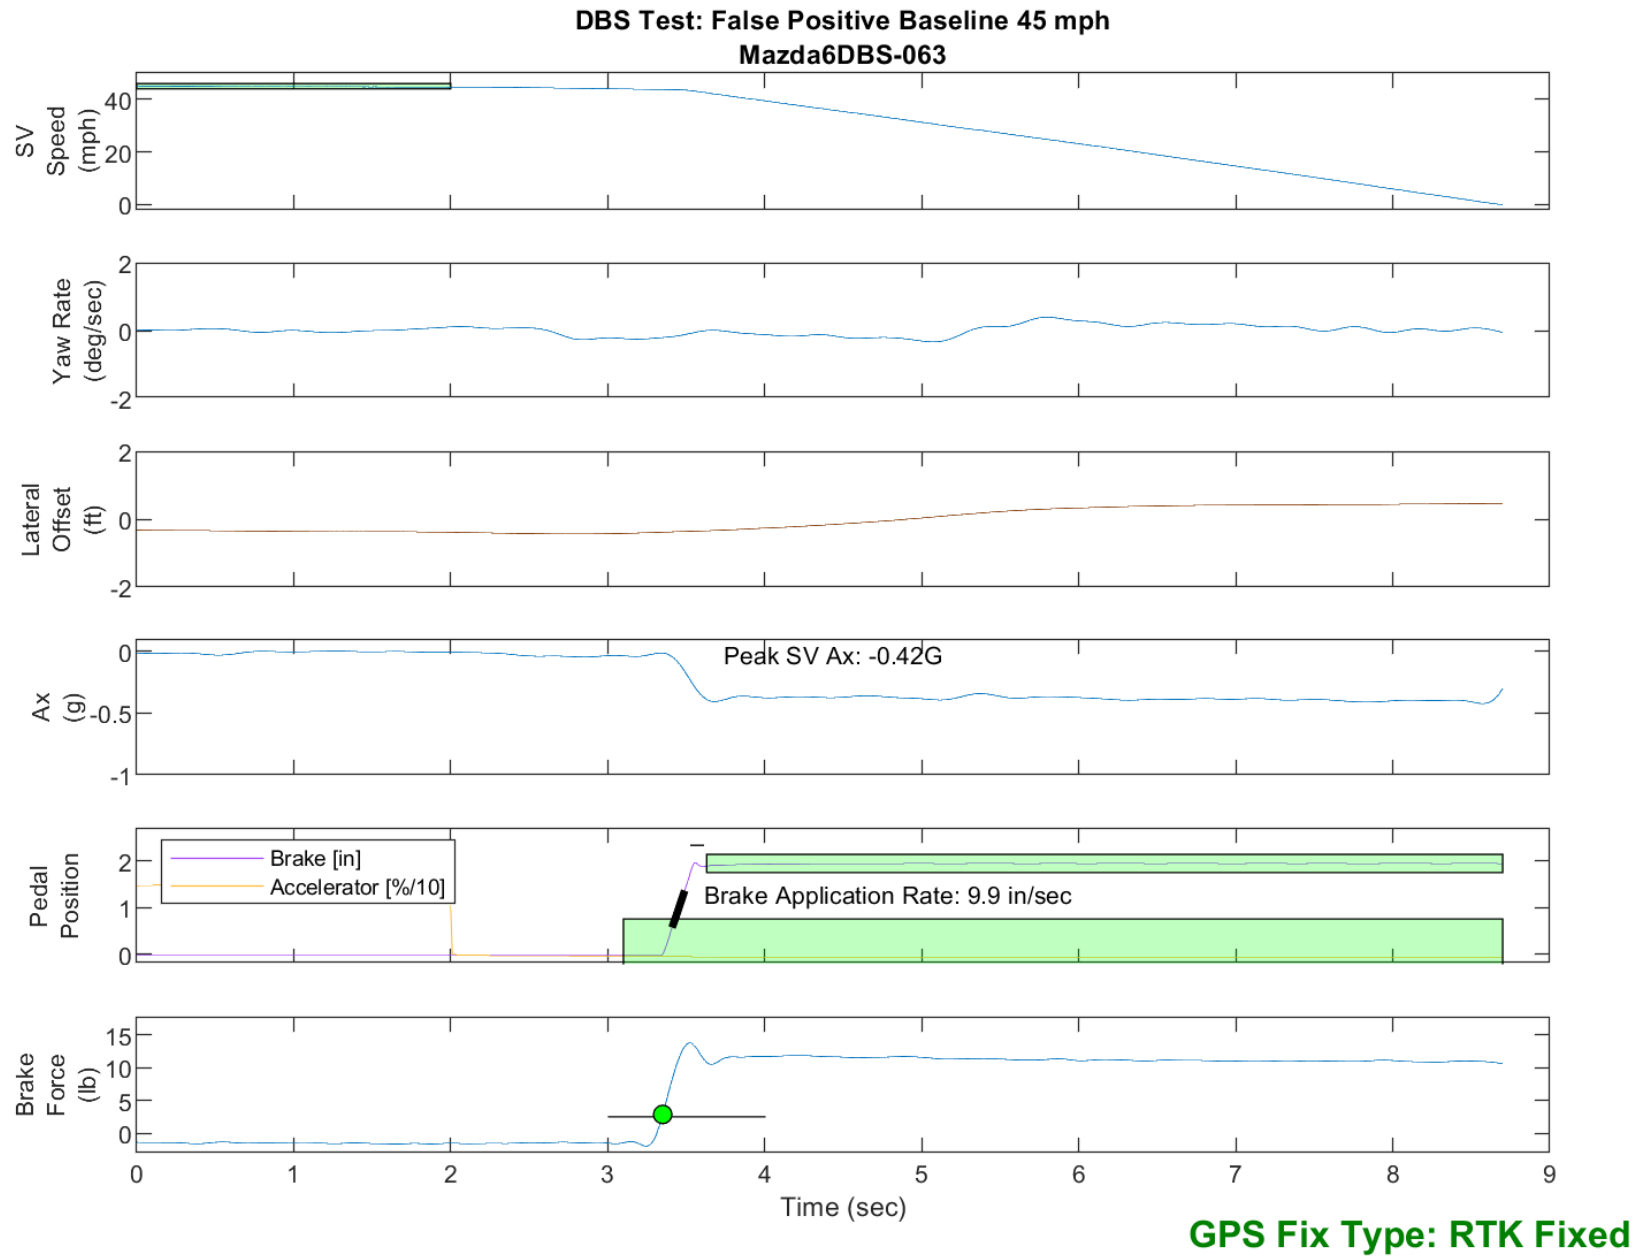


Figure E48. Time History for DBS Run 63, False Positive Baseline, SV 45 mph

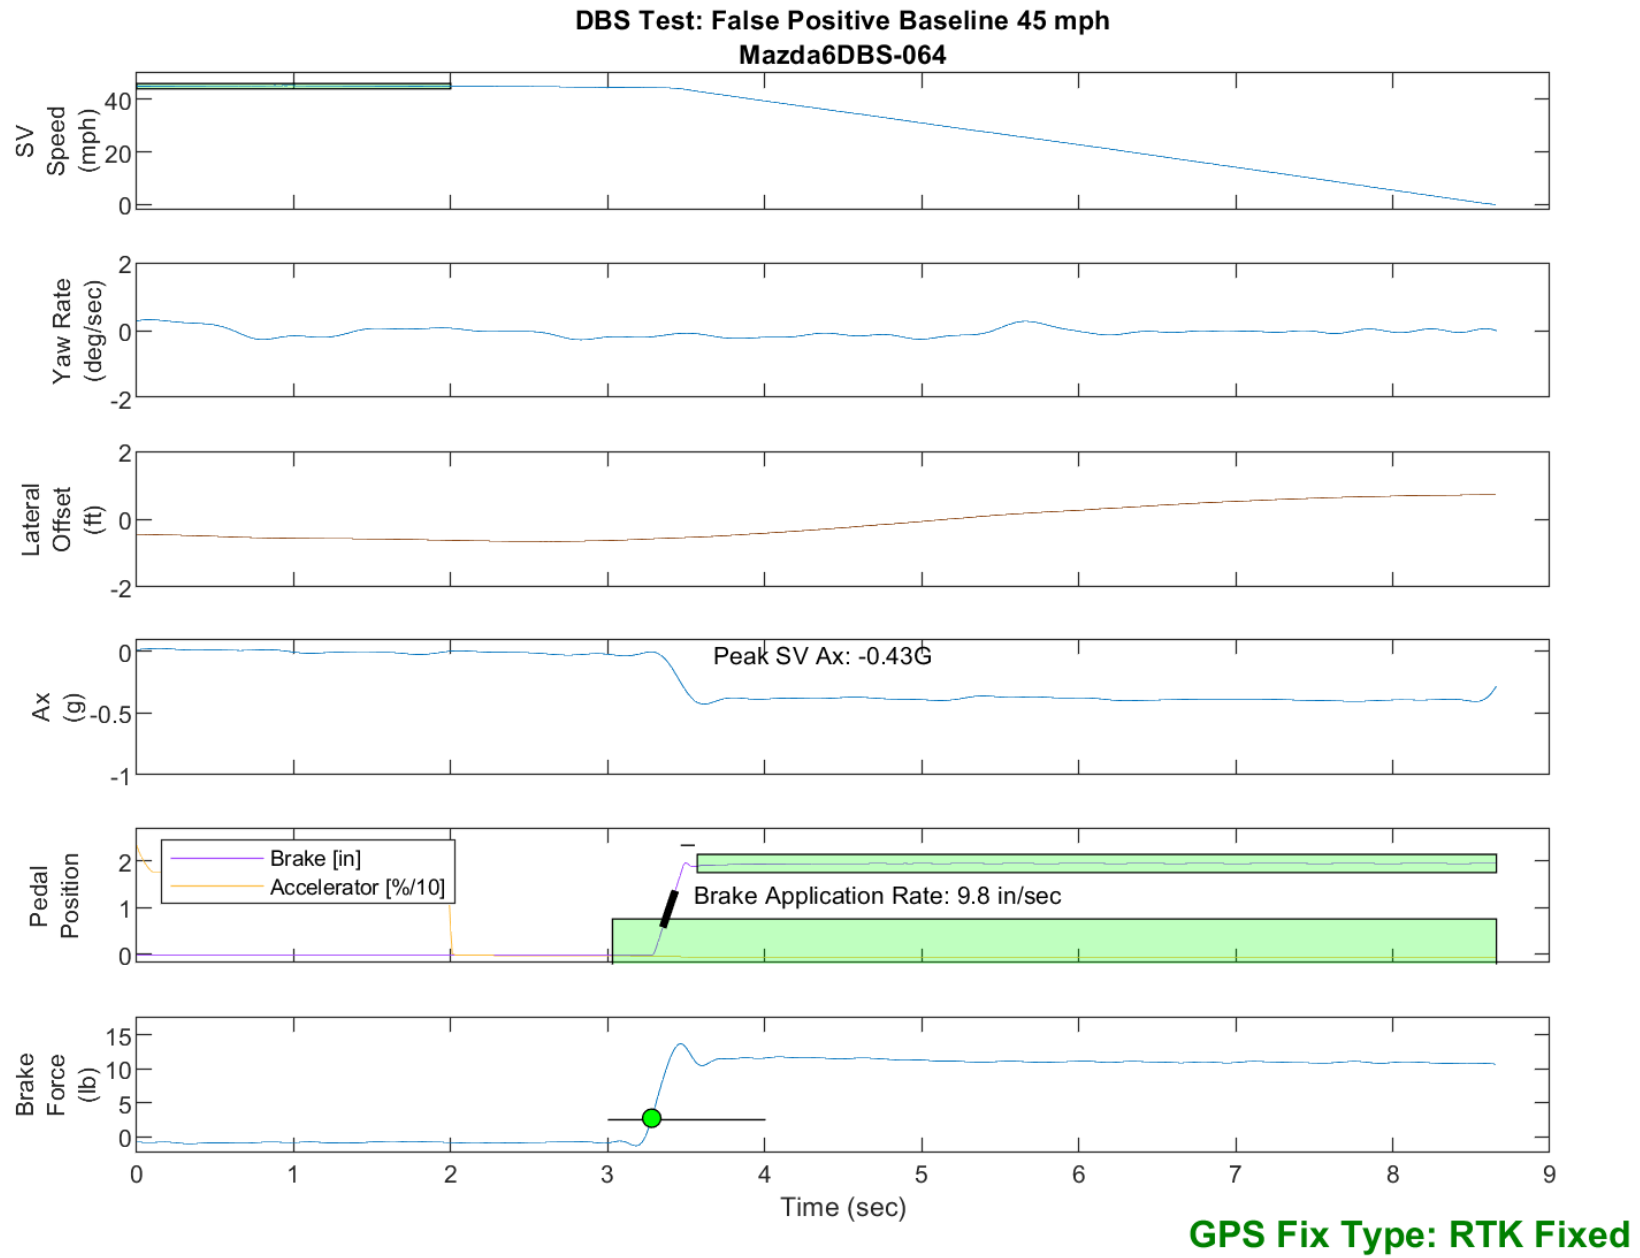


Figure E49. Time History for DBS Run 64, False Positive Baseline, SV 45 mph

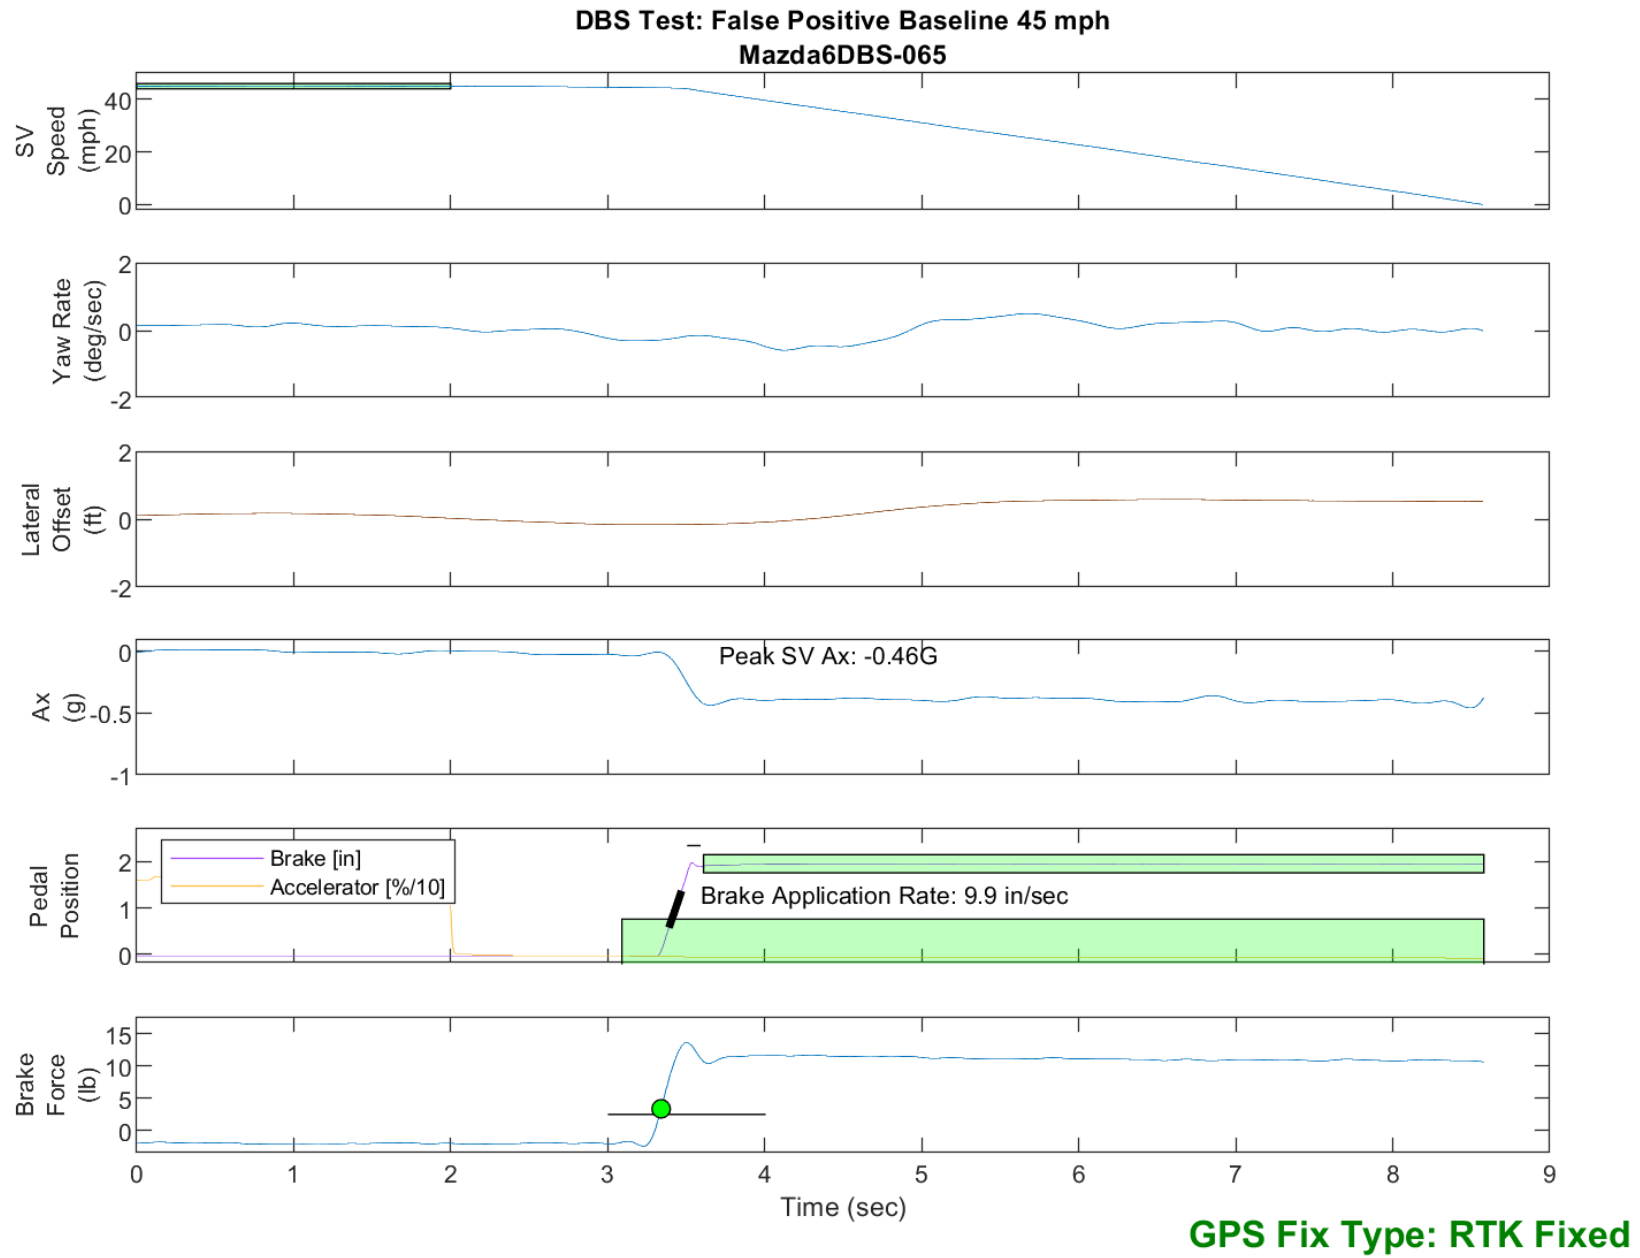


Figure E50. Time History for DBS Run 65, False Positive Baseline, SV 45 mph



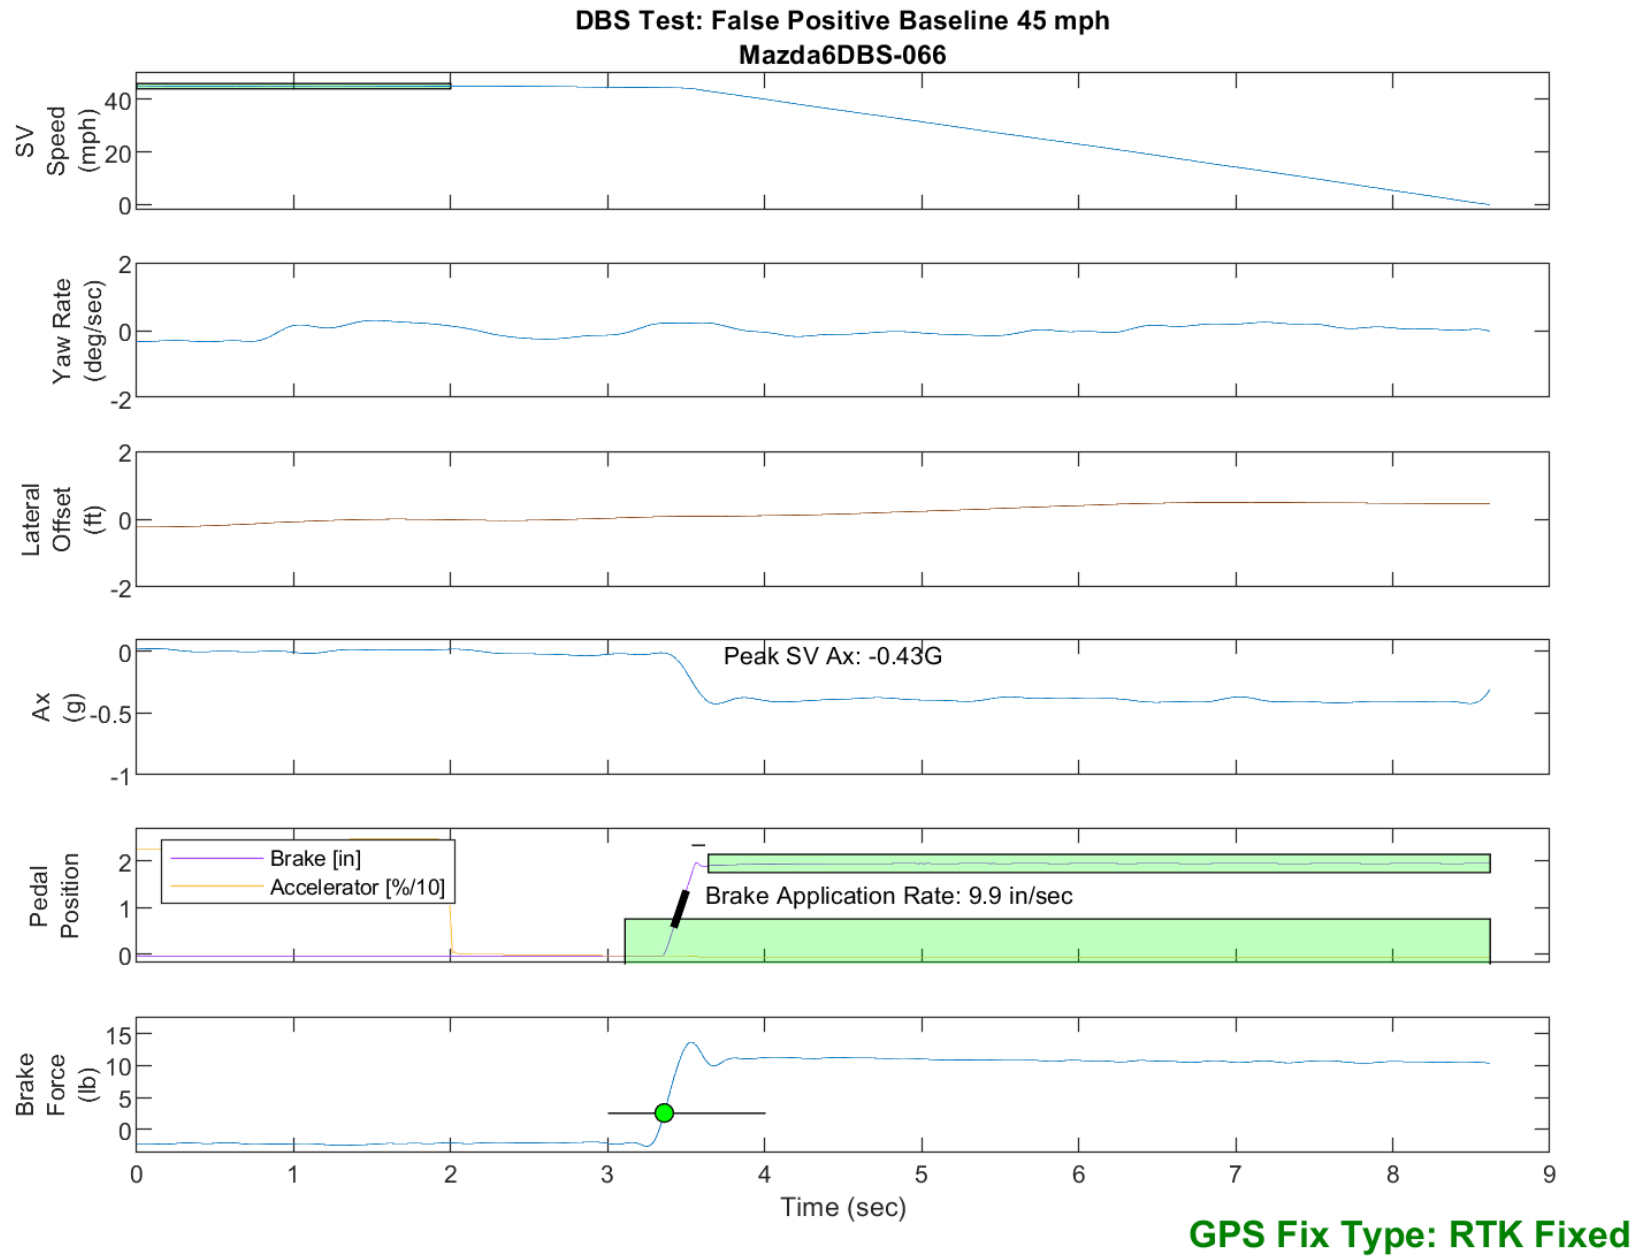


Figure E51. Time History for DBS Run 66, False Positive Baseline, SV 45 mph

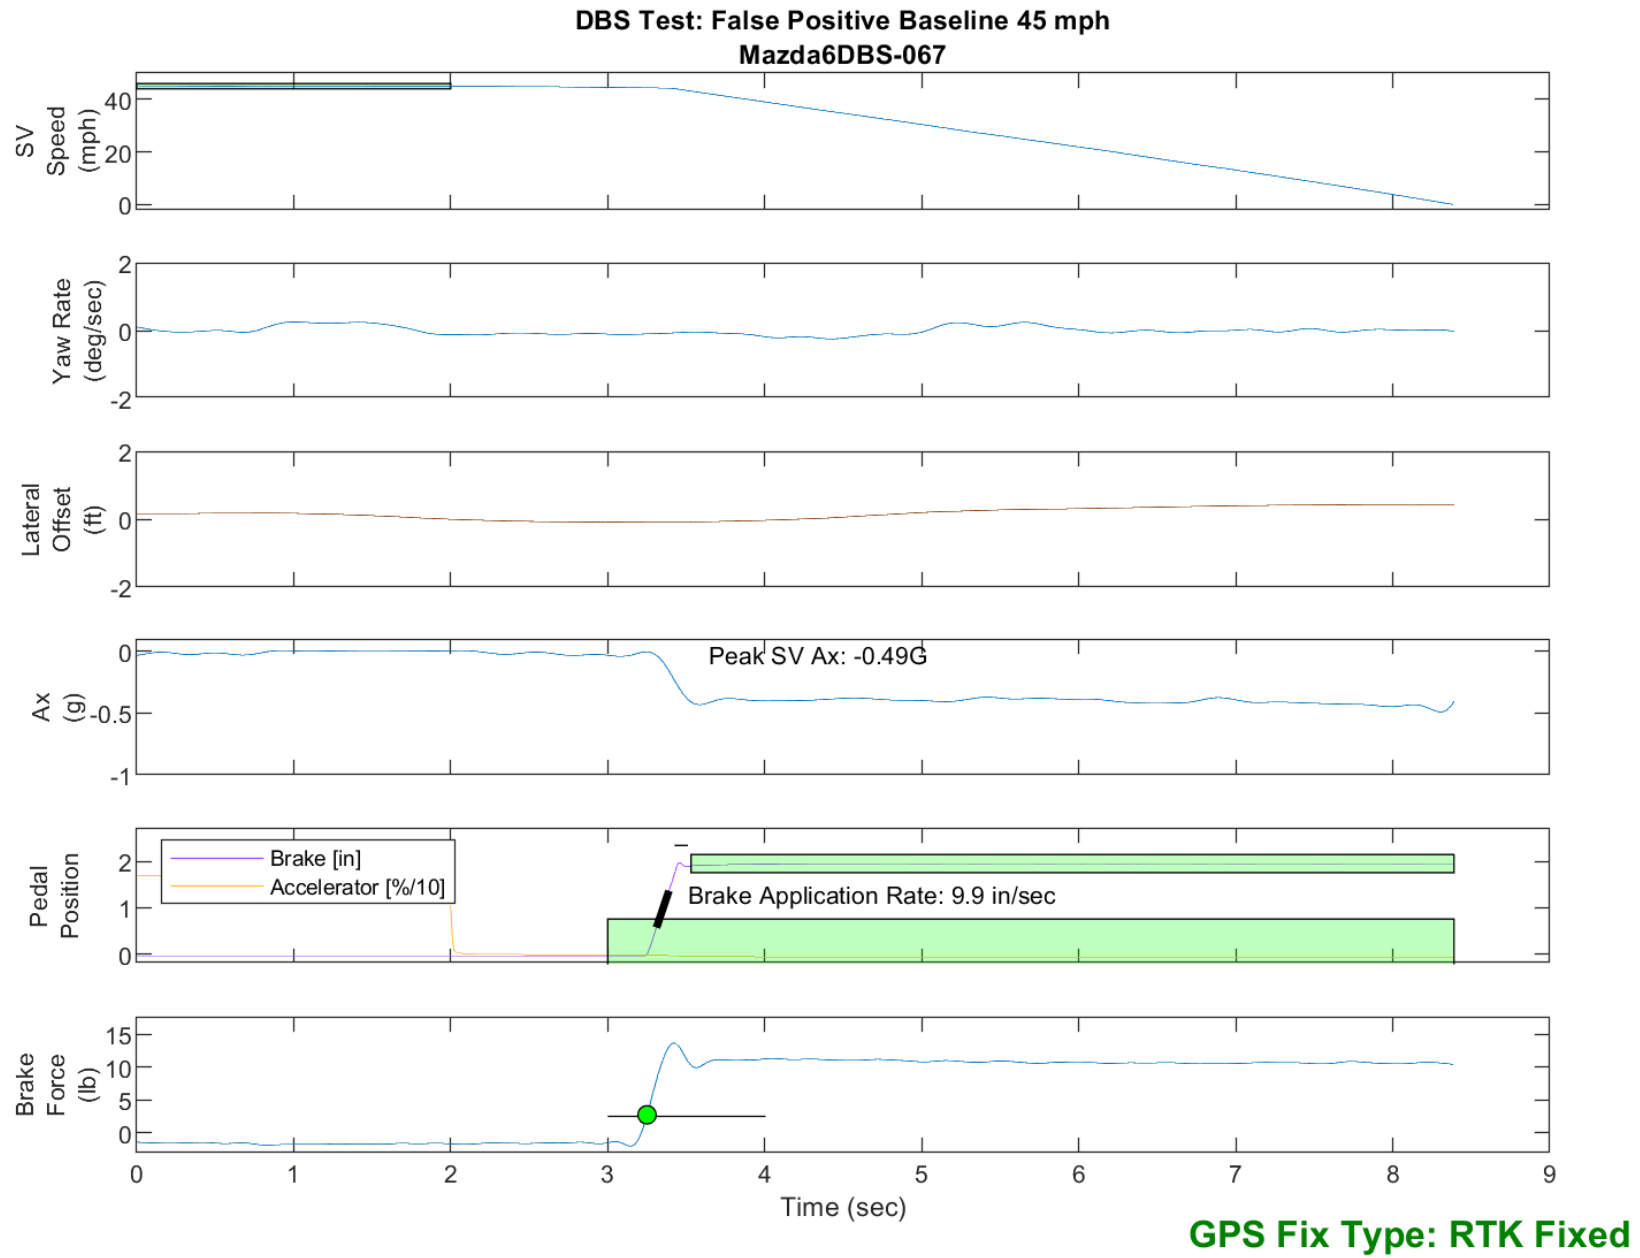


Figure E52. Time History for DBS Run 67, False Positive Baseline, SV 45 mph

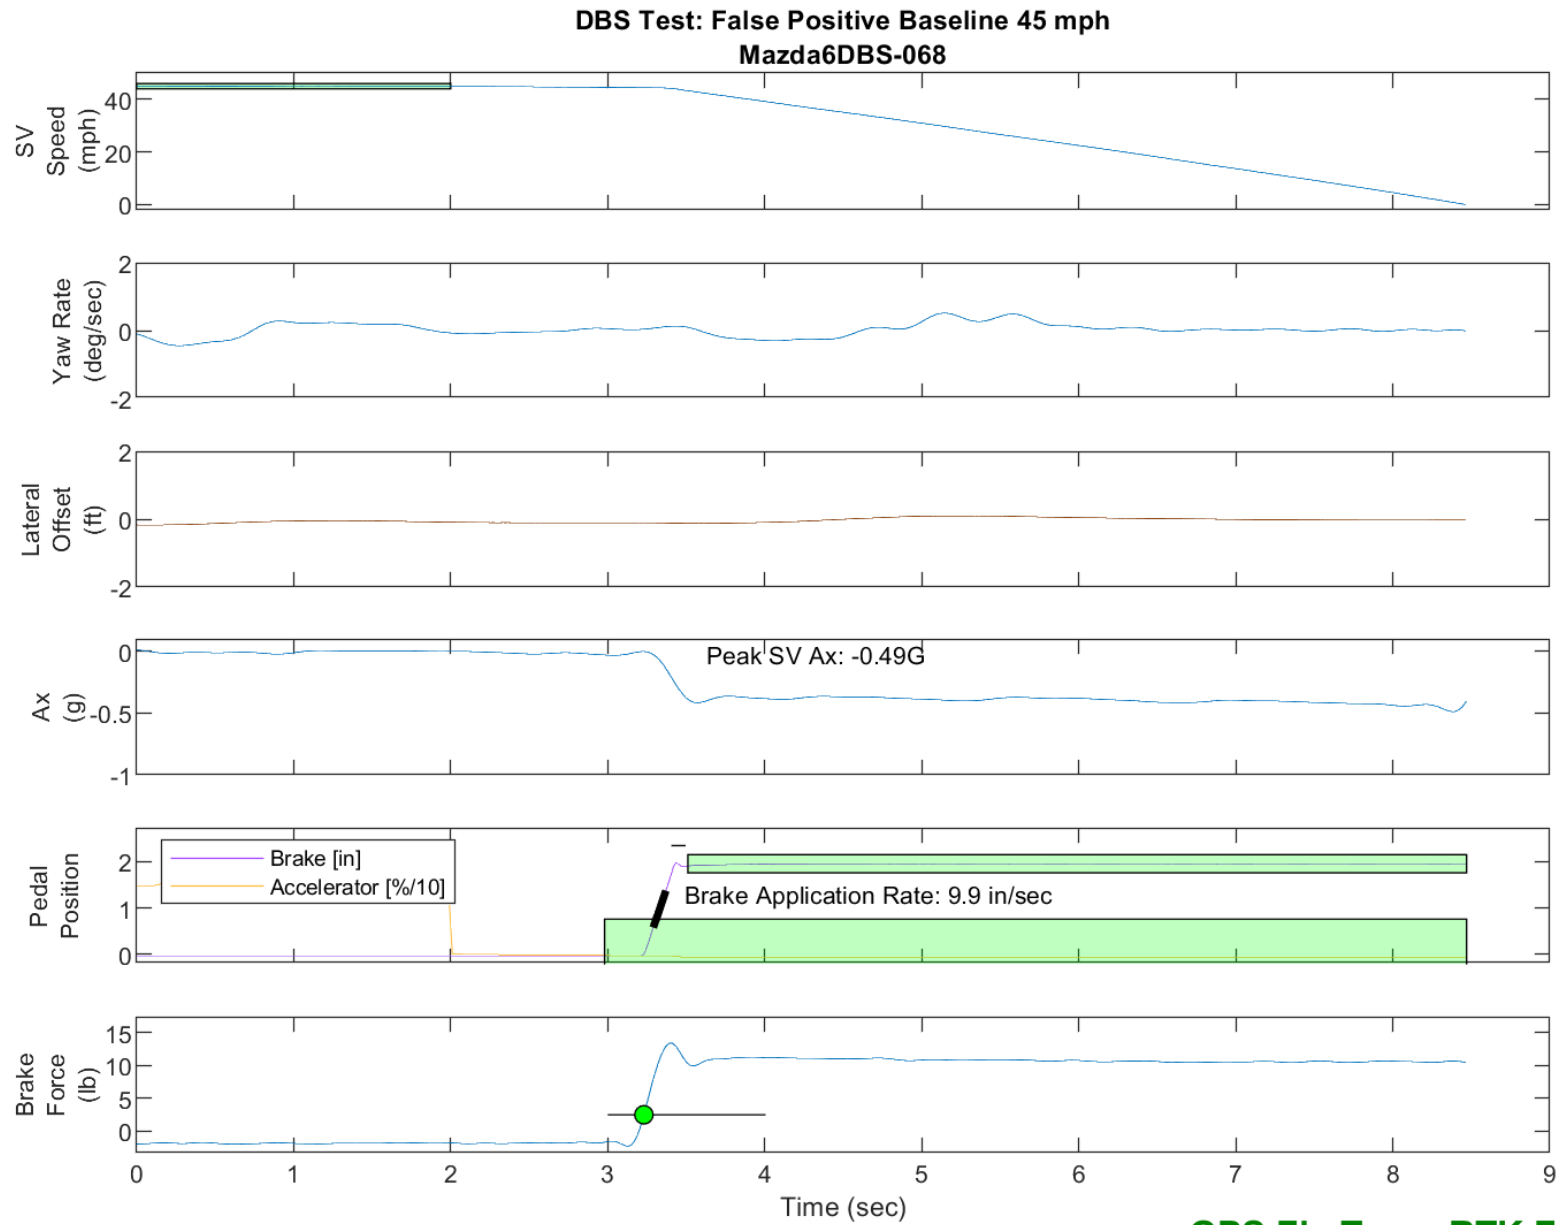


Figure E53. Time History for DBS Run 68, False Positive Baseline, SV 45 mph

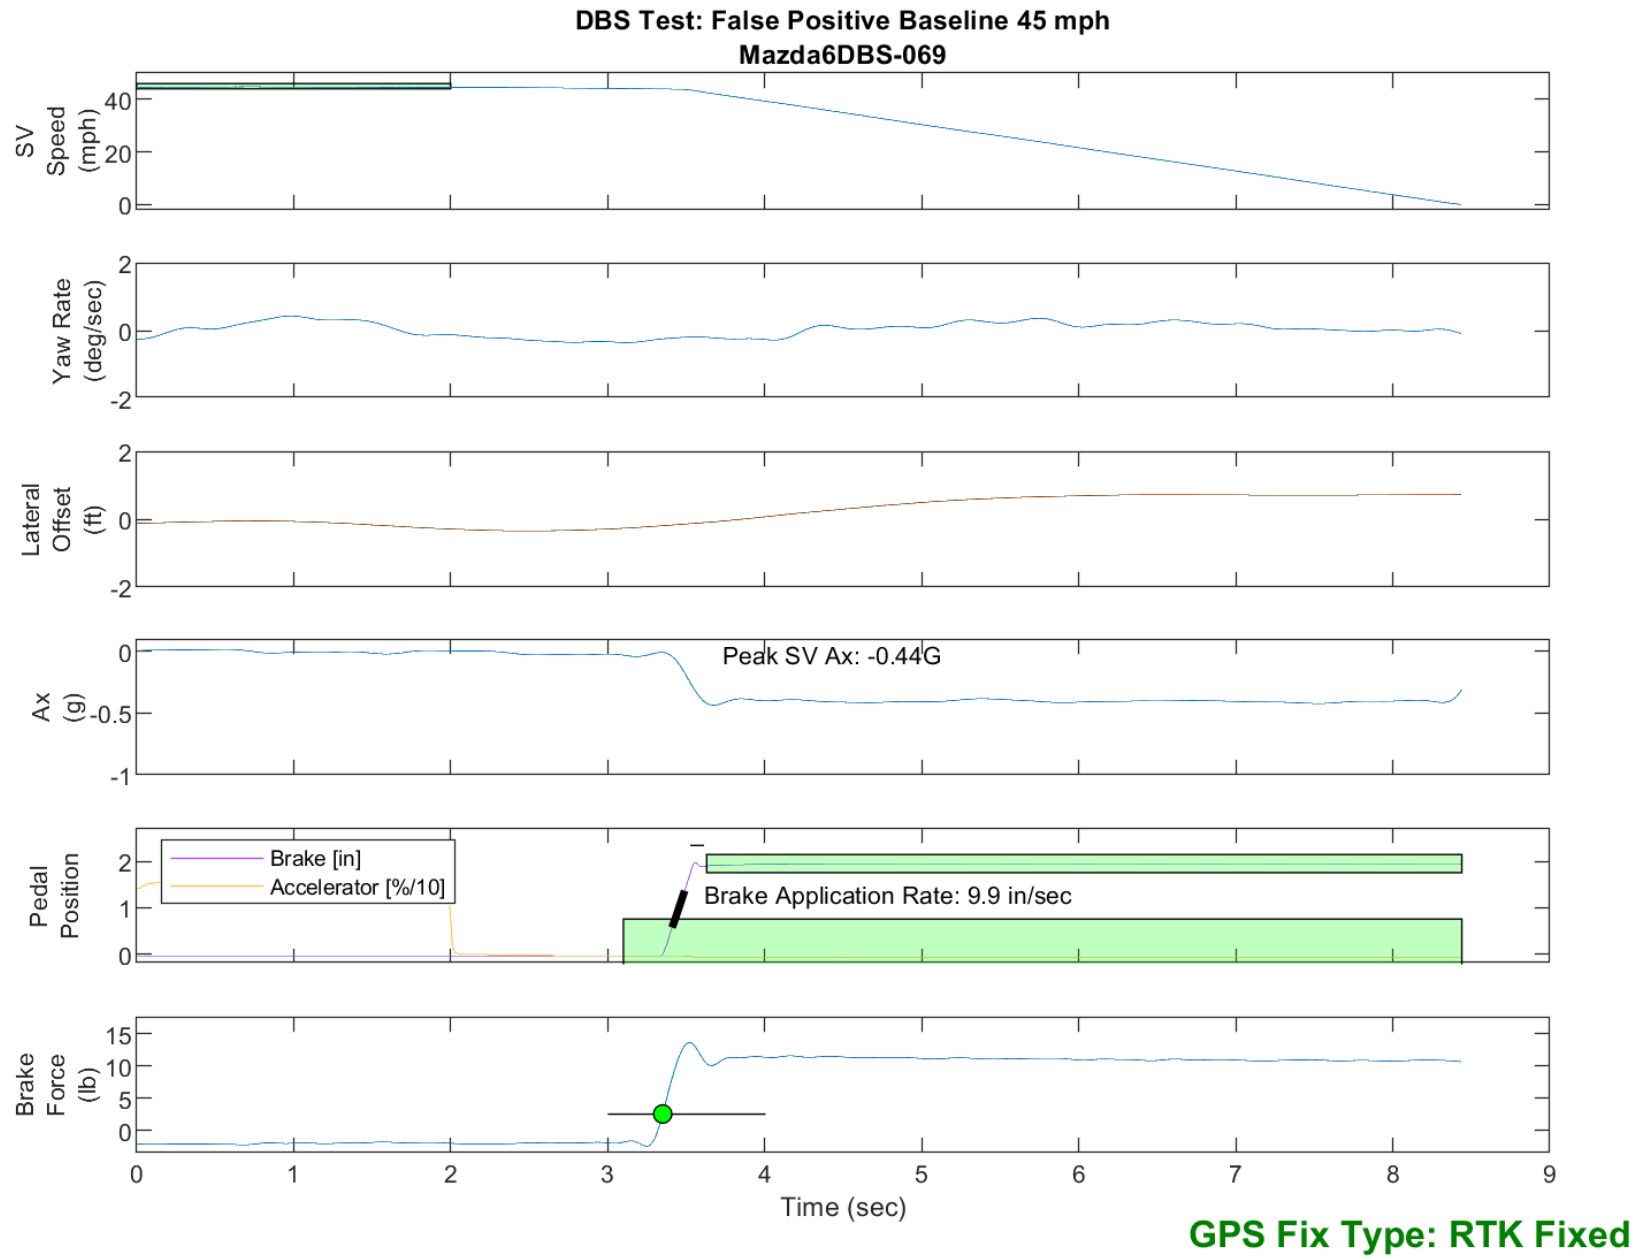


Figure E54. Time History for DBS Run 69, False Positive Baseline, SV 45 mph

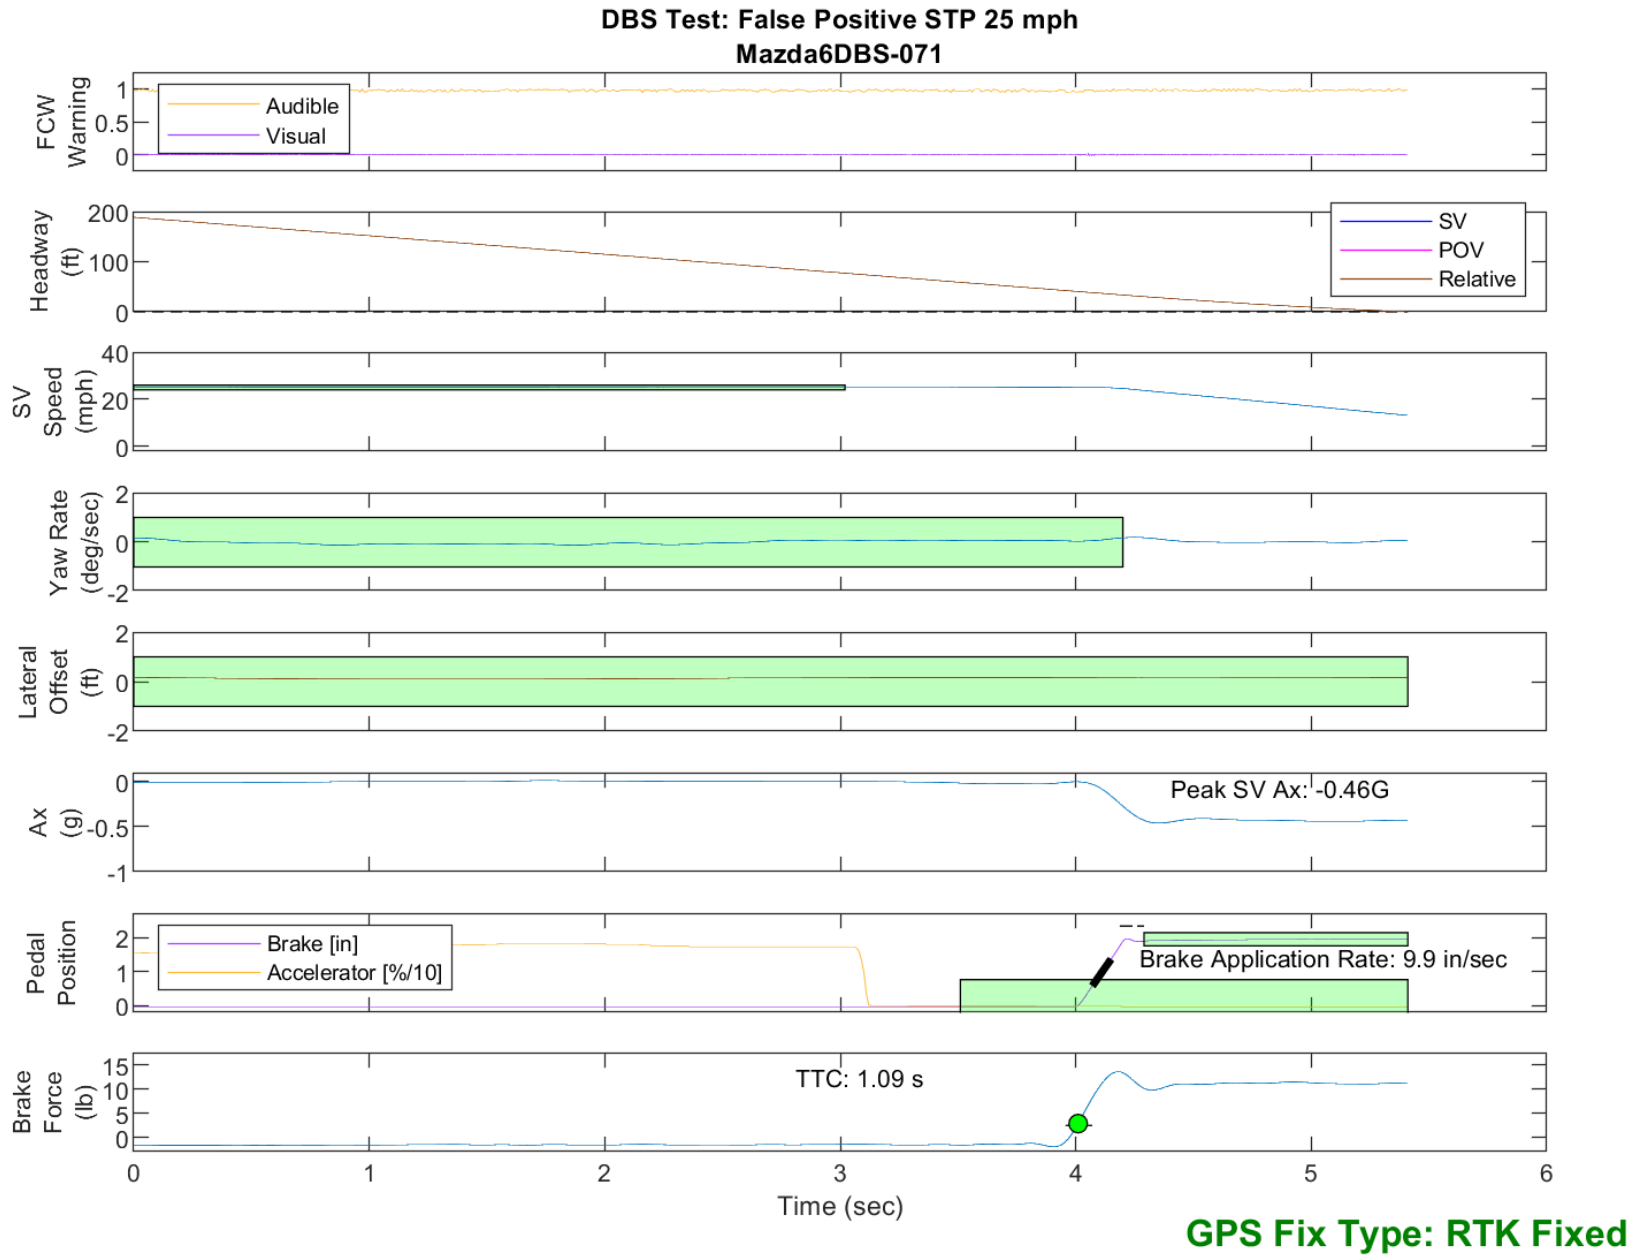


Figure E55. Time History for DBS Run 71, SV Encounters Steel Trench Plate, SV 25 mph

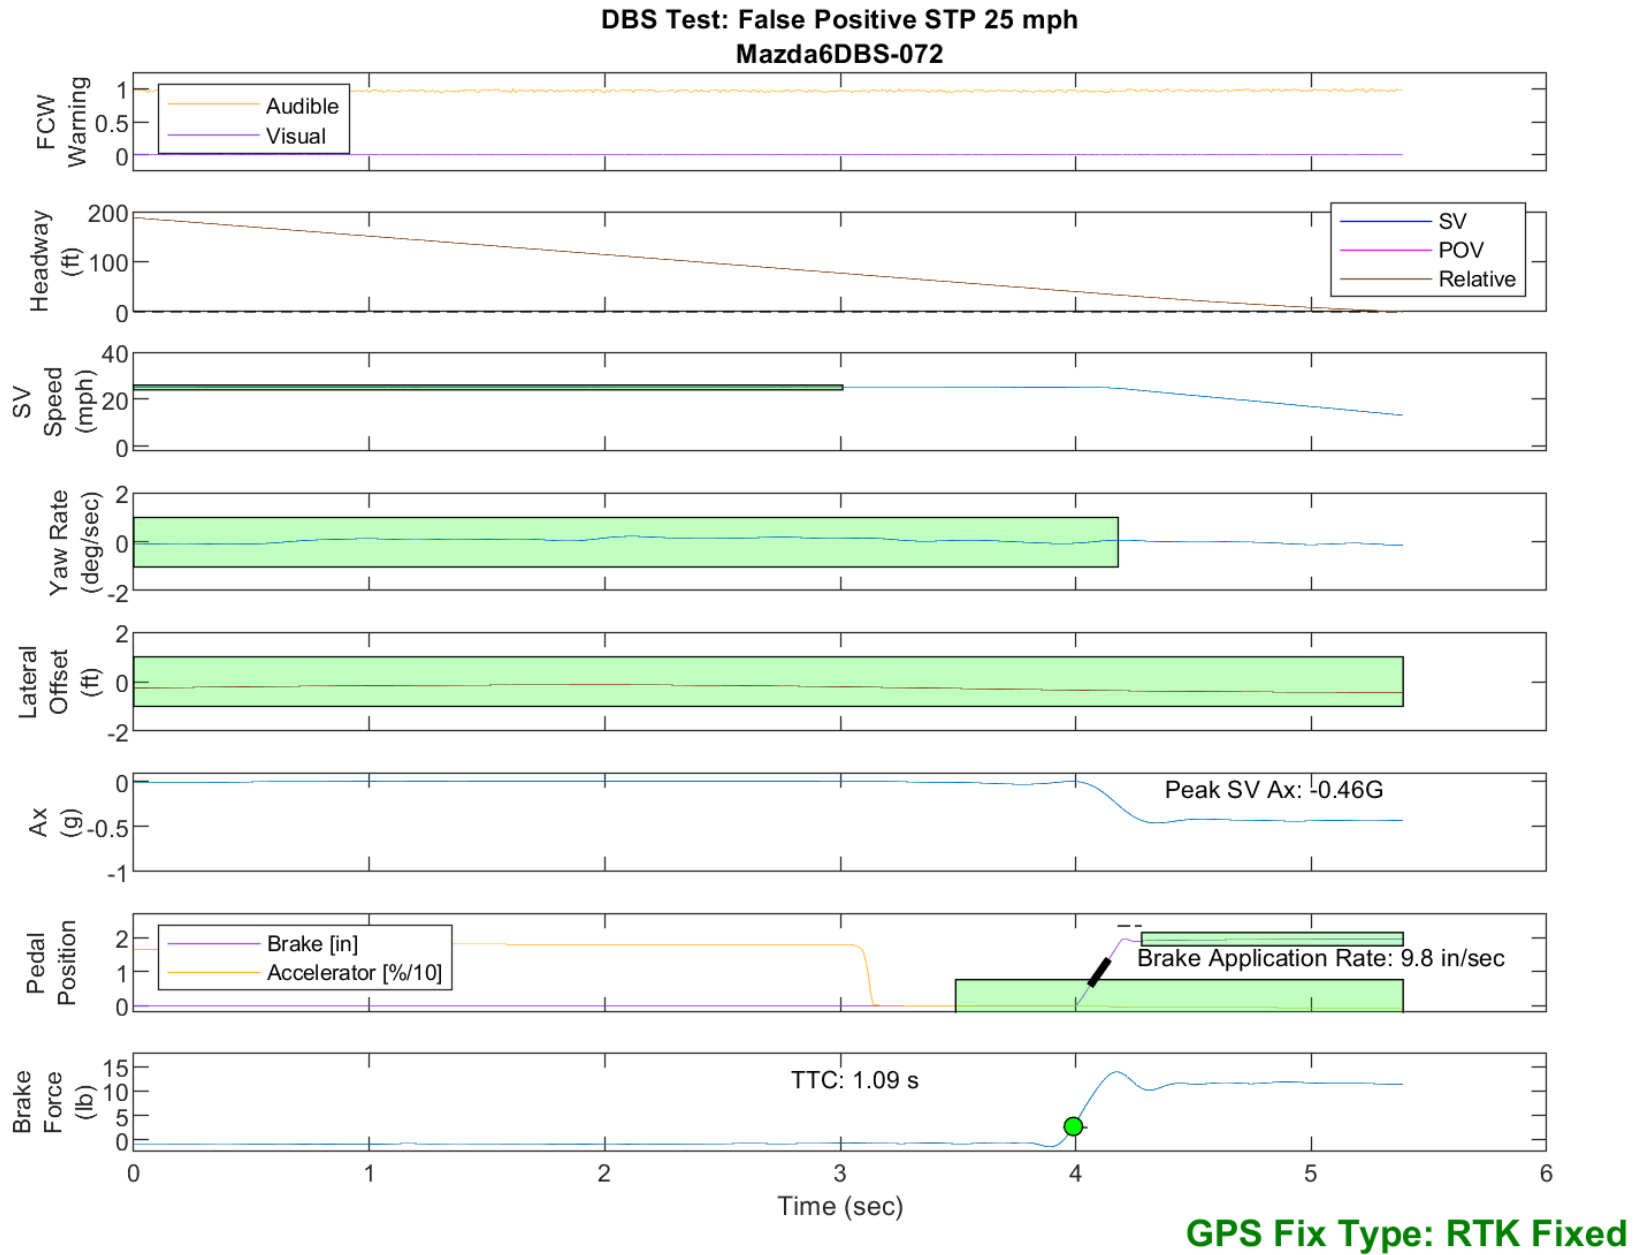


Figure E56. Time History for DBS Run 72, SV Encounters Steel Trench Plate, SV 25 mph

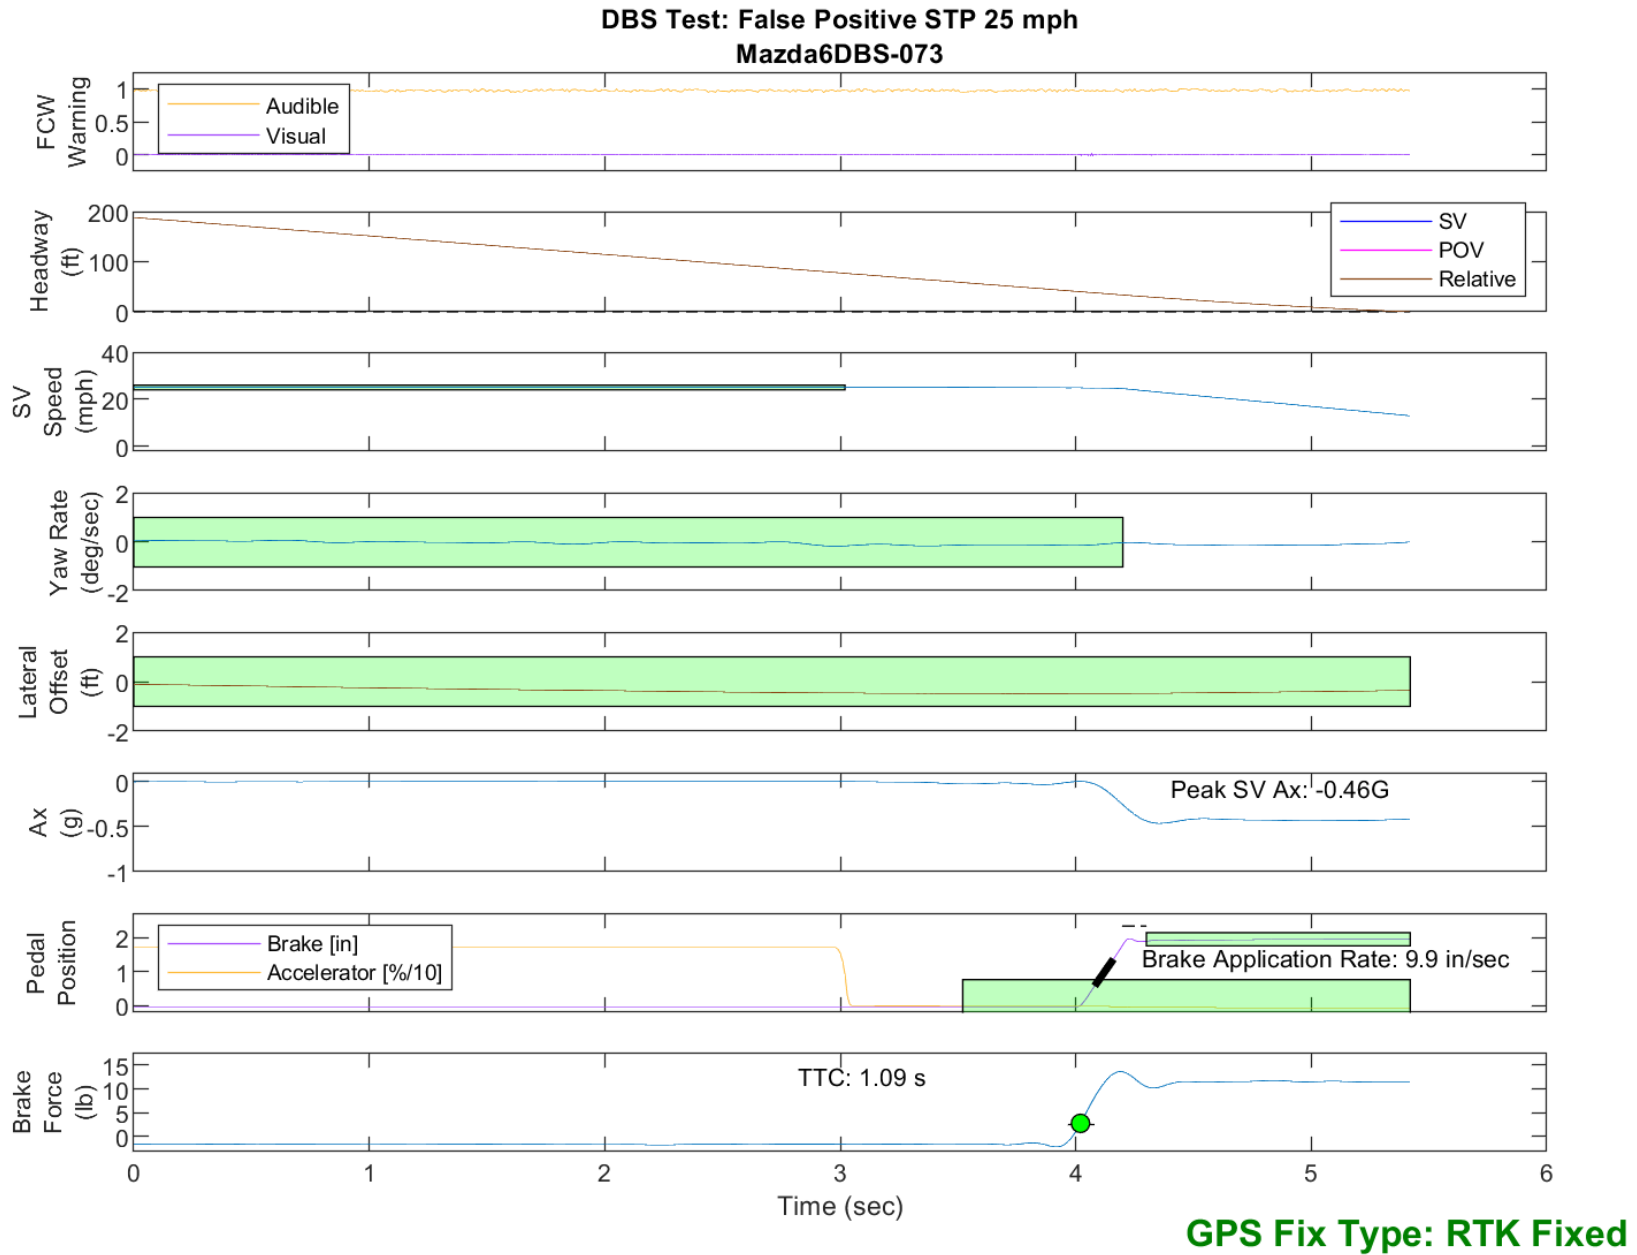


Figure E57. Time History for DBS Run 73, SV Encounters Steel Trench Plate, SV 25 mph

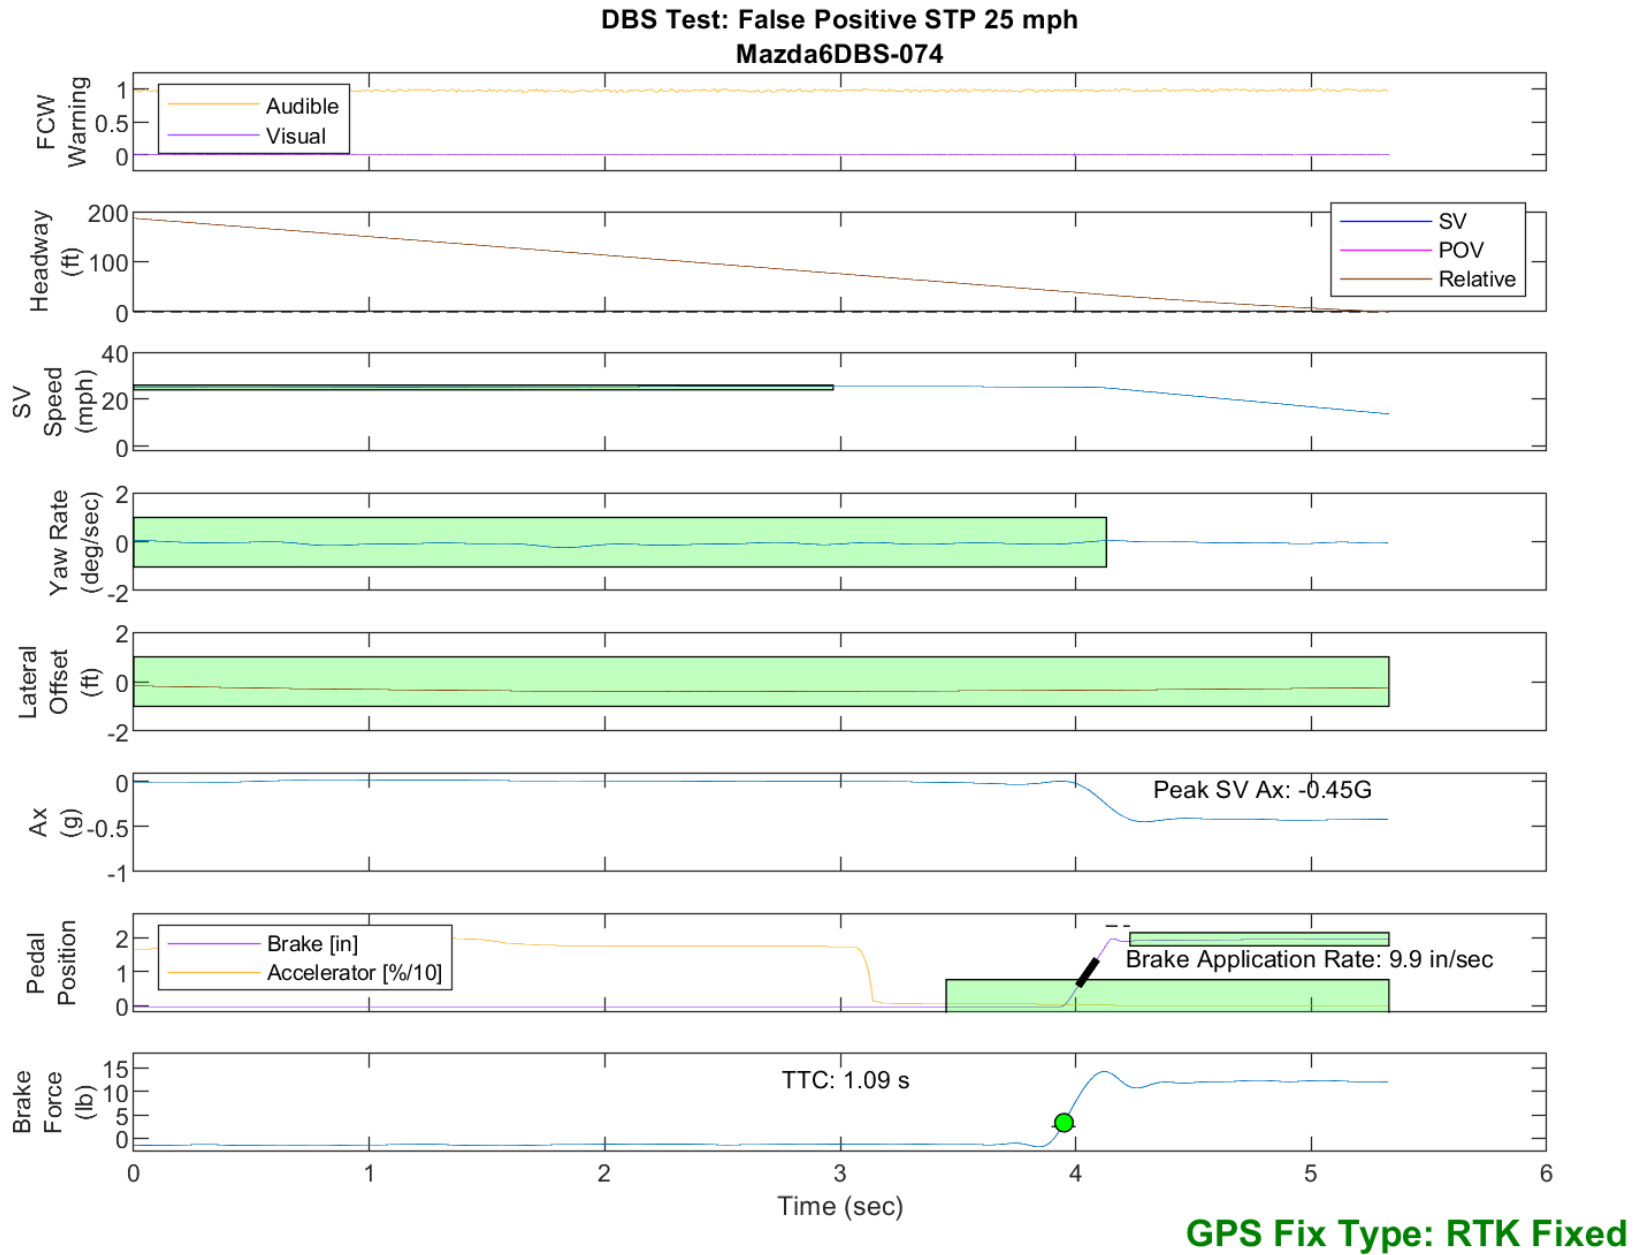


Figure E58. Time History for DBS Run 74, SV Encounters Steel Trench Plate, SV 25 mph



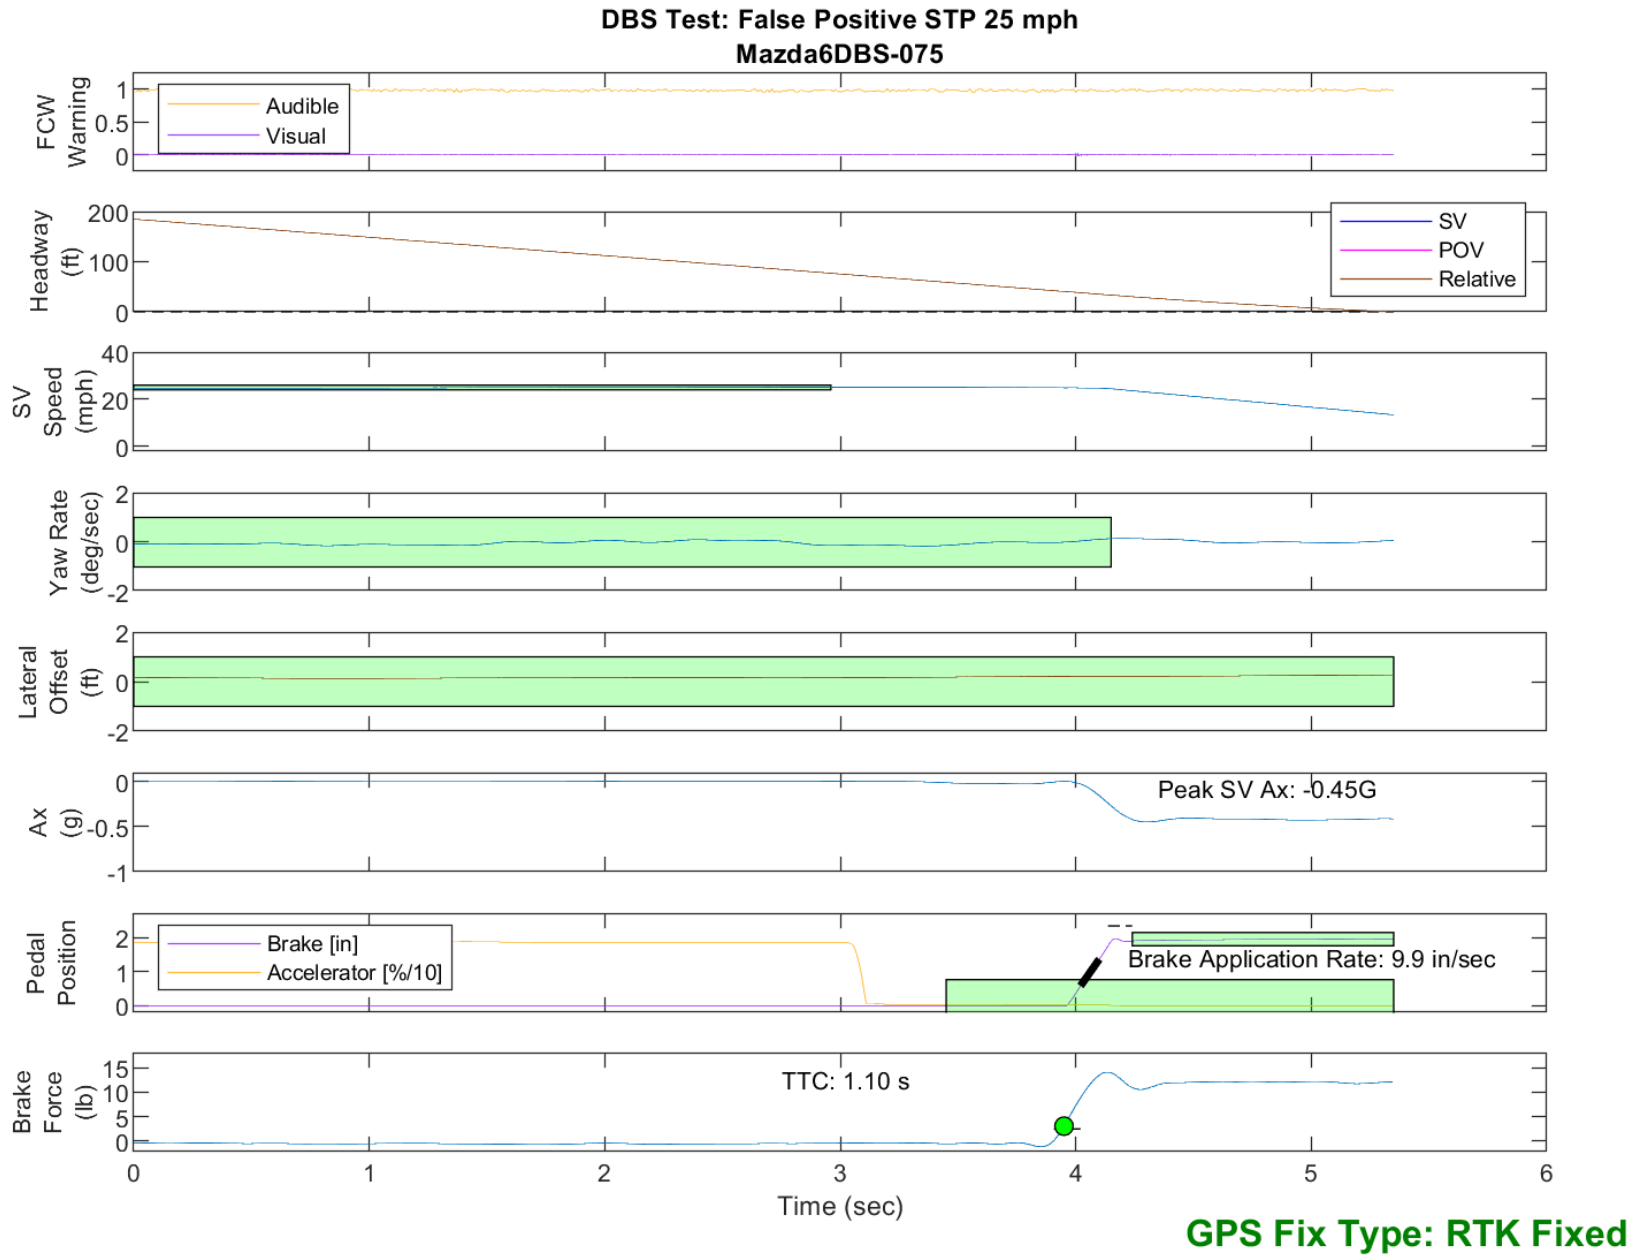


Figure E59. Time History for DBS Run 75, SV Encounters Steel Trench Plate, SV 25 mph

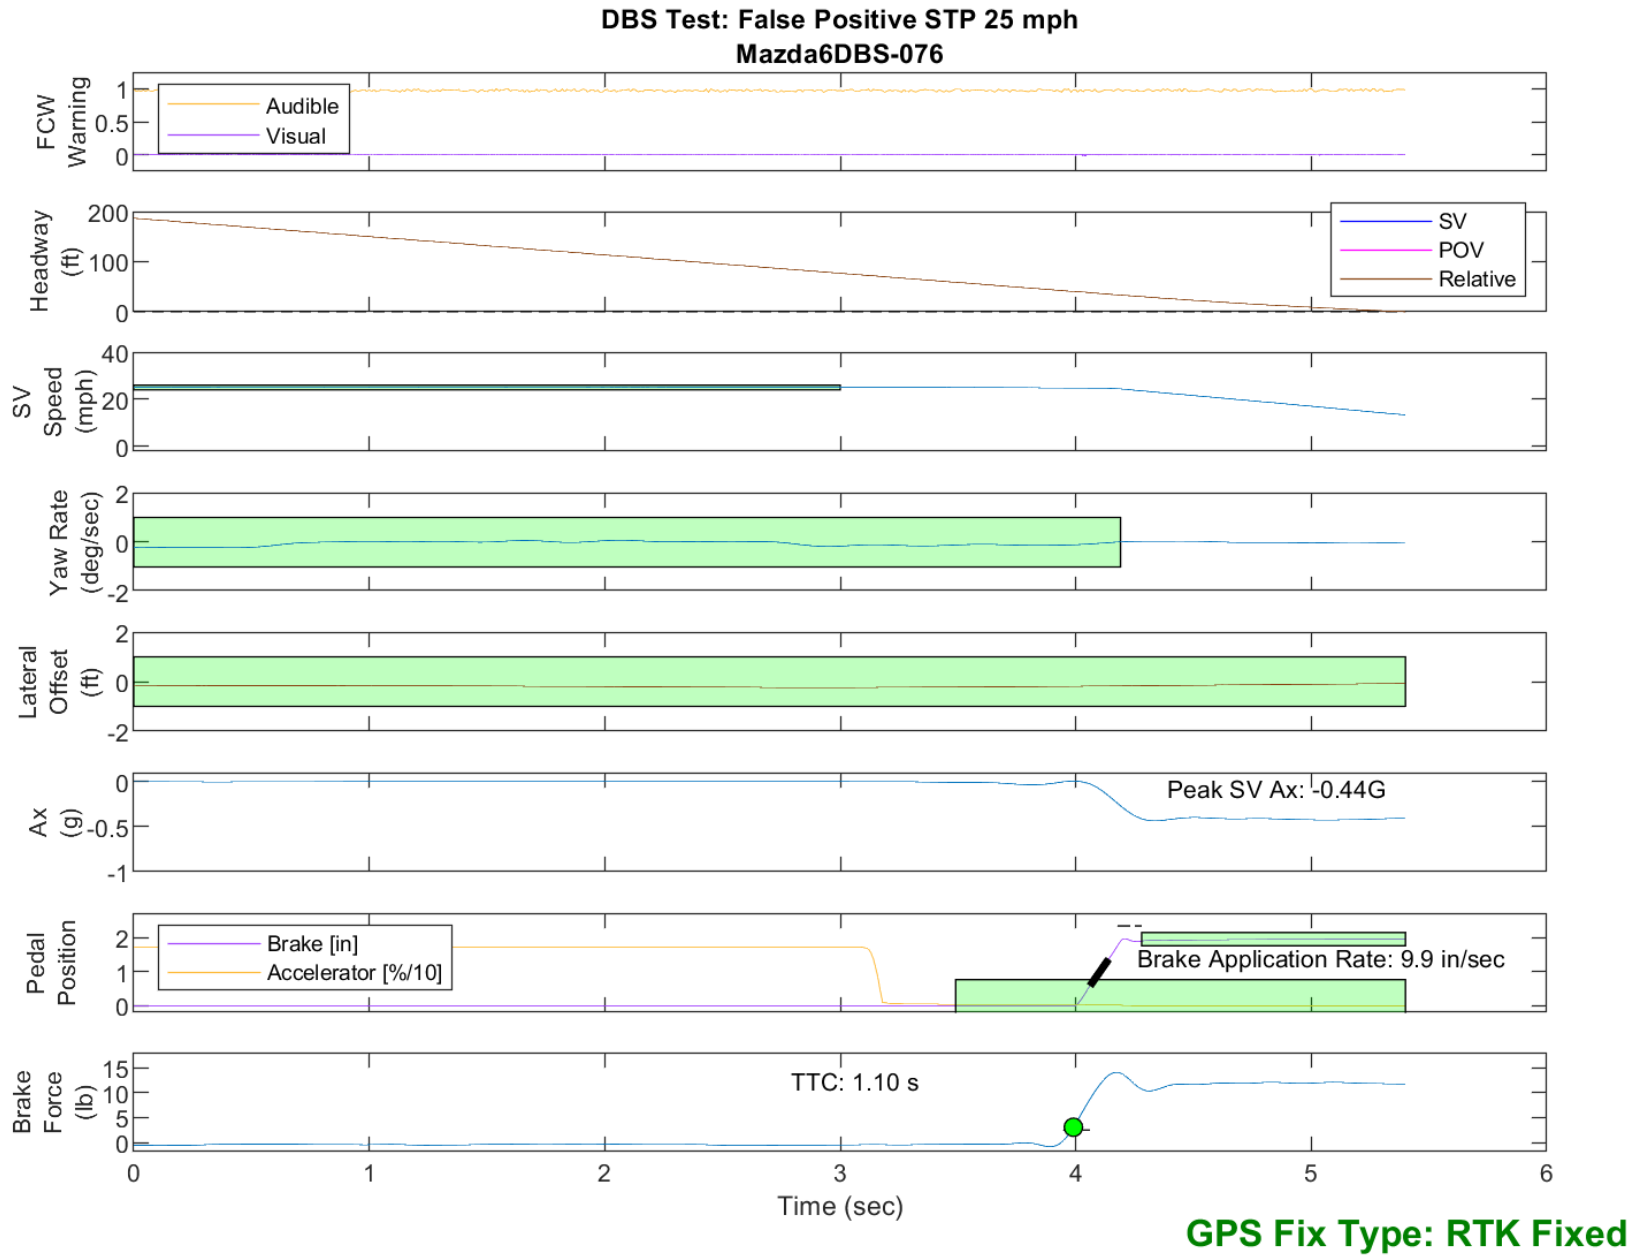


Figure E60. Time History for DBS Run 76, SV Encounters Steel Trench Plate, SV 25 mph

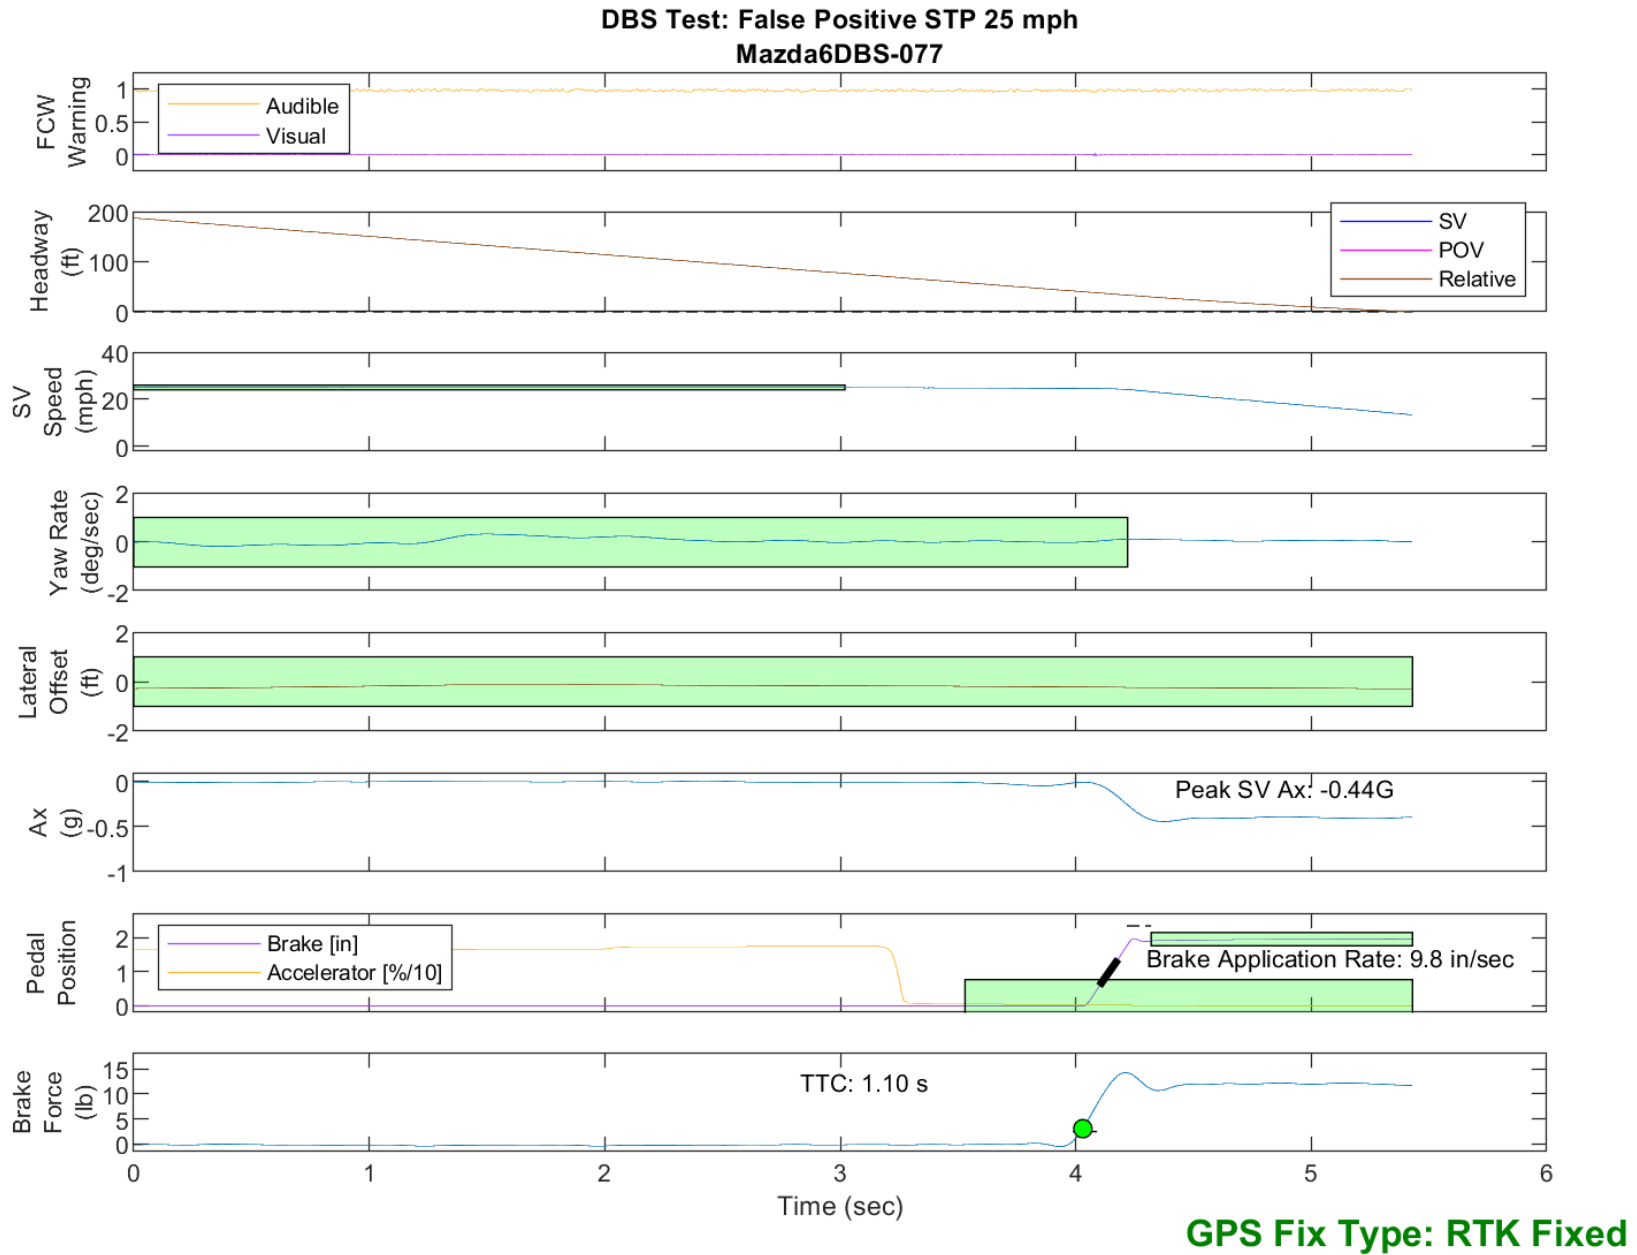


Figure E61. Time History for DBS Run 77, SV Encounters Steel Trench Plate, SV 25 mph

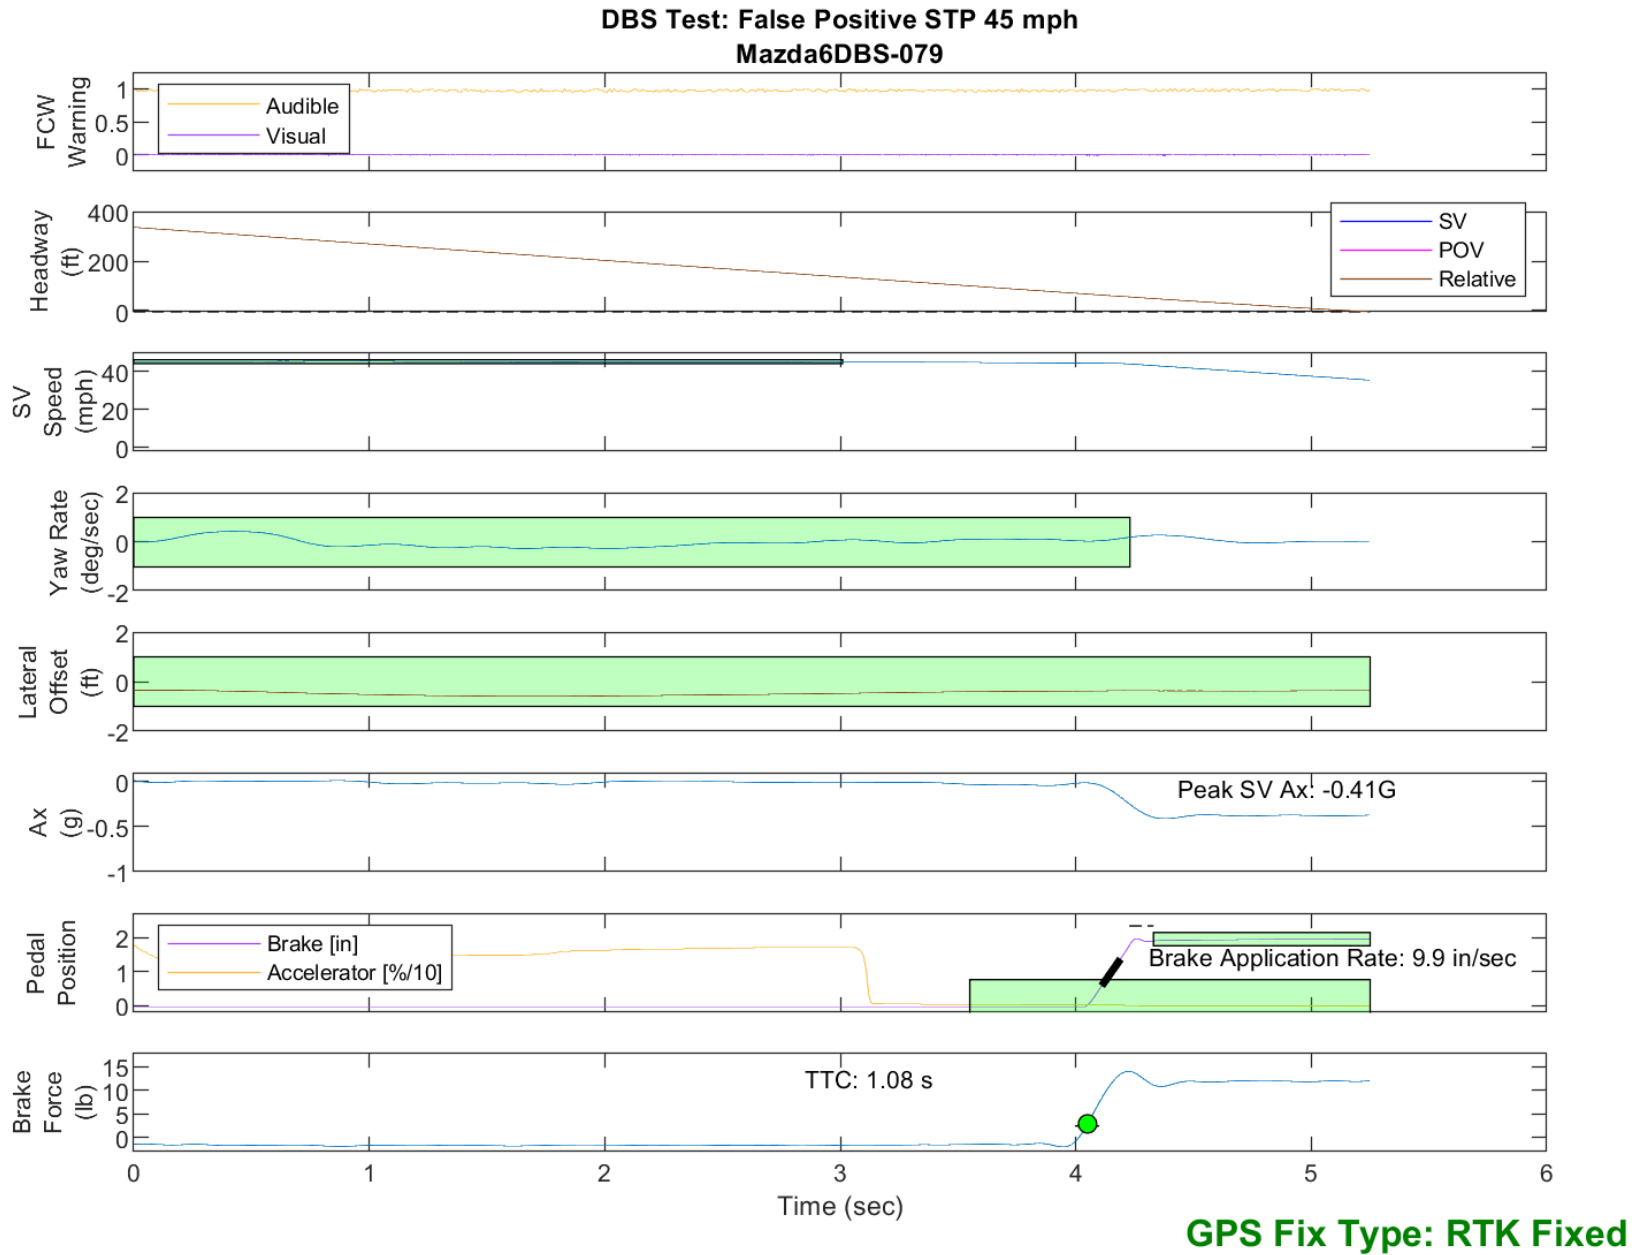


Figure E62. Time History for DBS Run 79, SV Encounters Steel Trench Plate, SV 45 mph

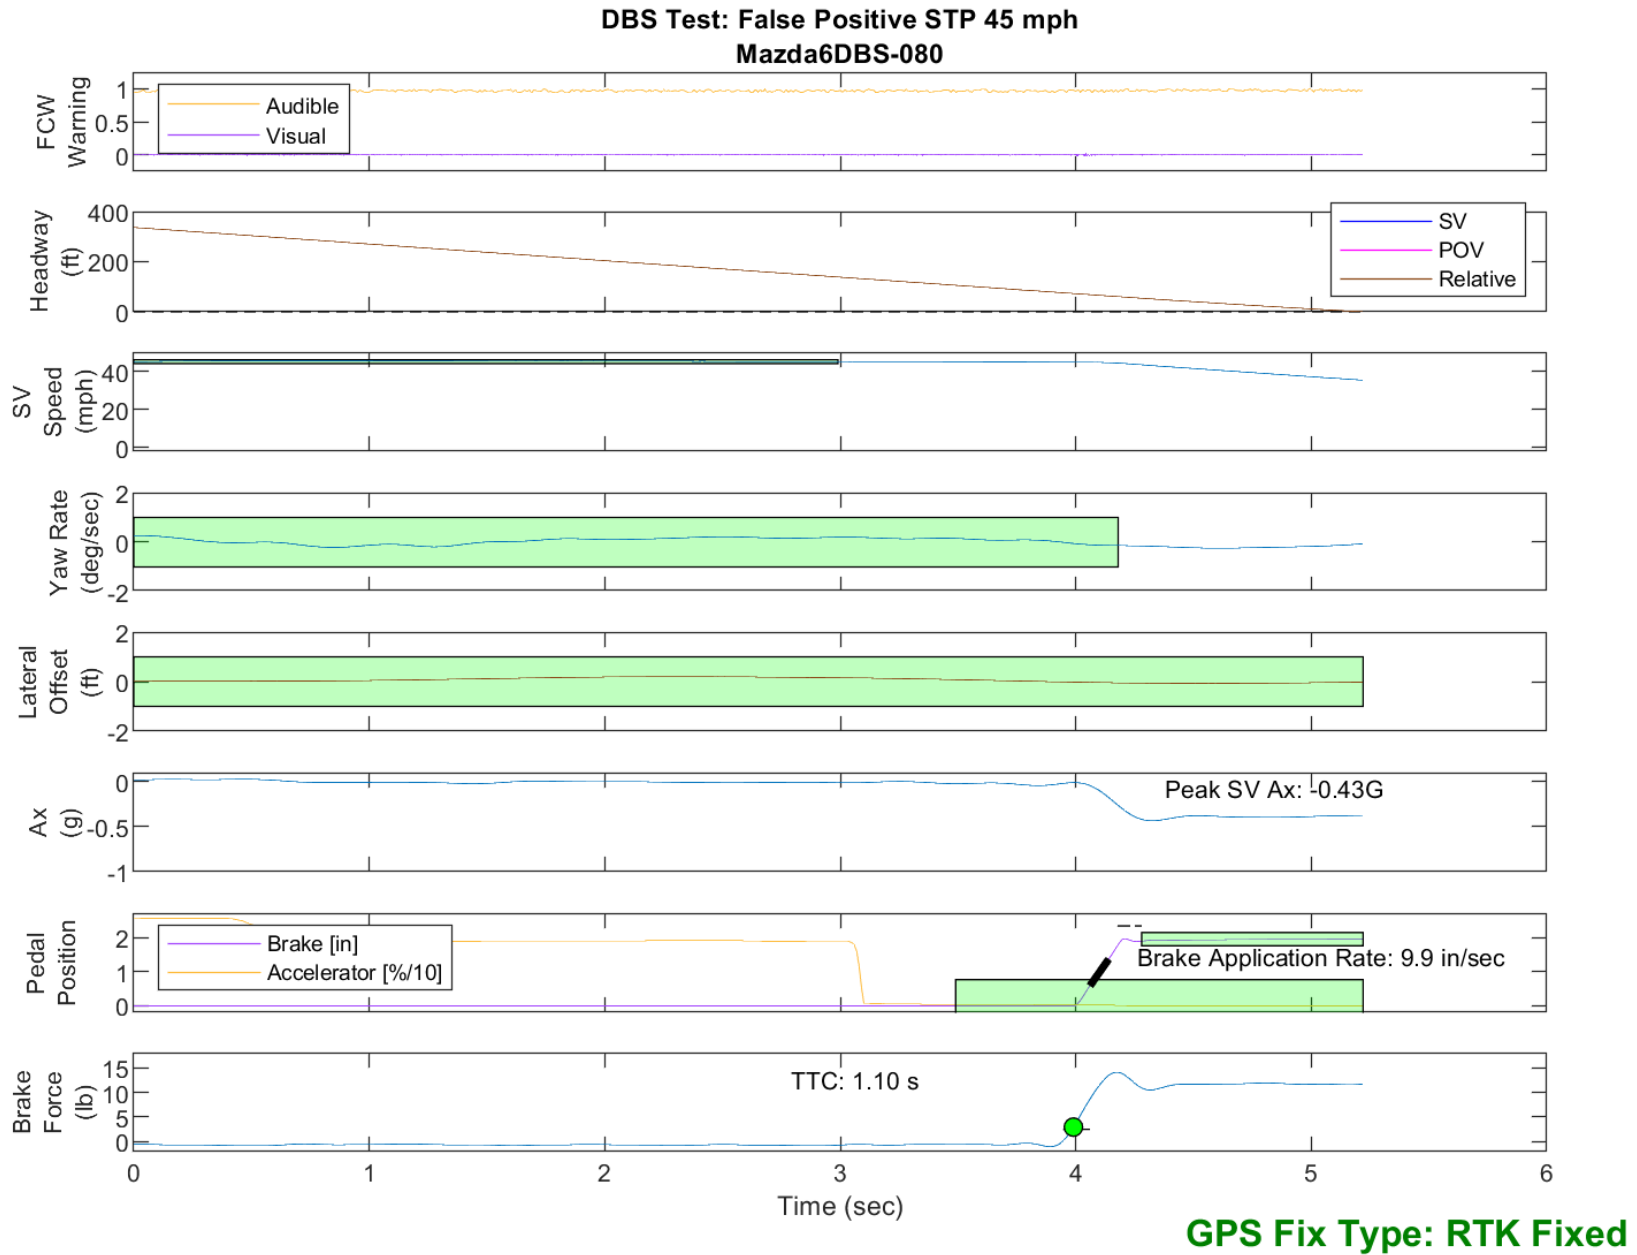


Figure E63. Time History for DBS Run 80, SV Encounters Steel Trench Plate, SV 45 mph

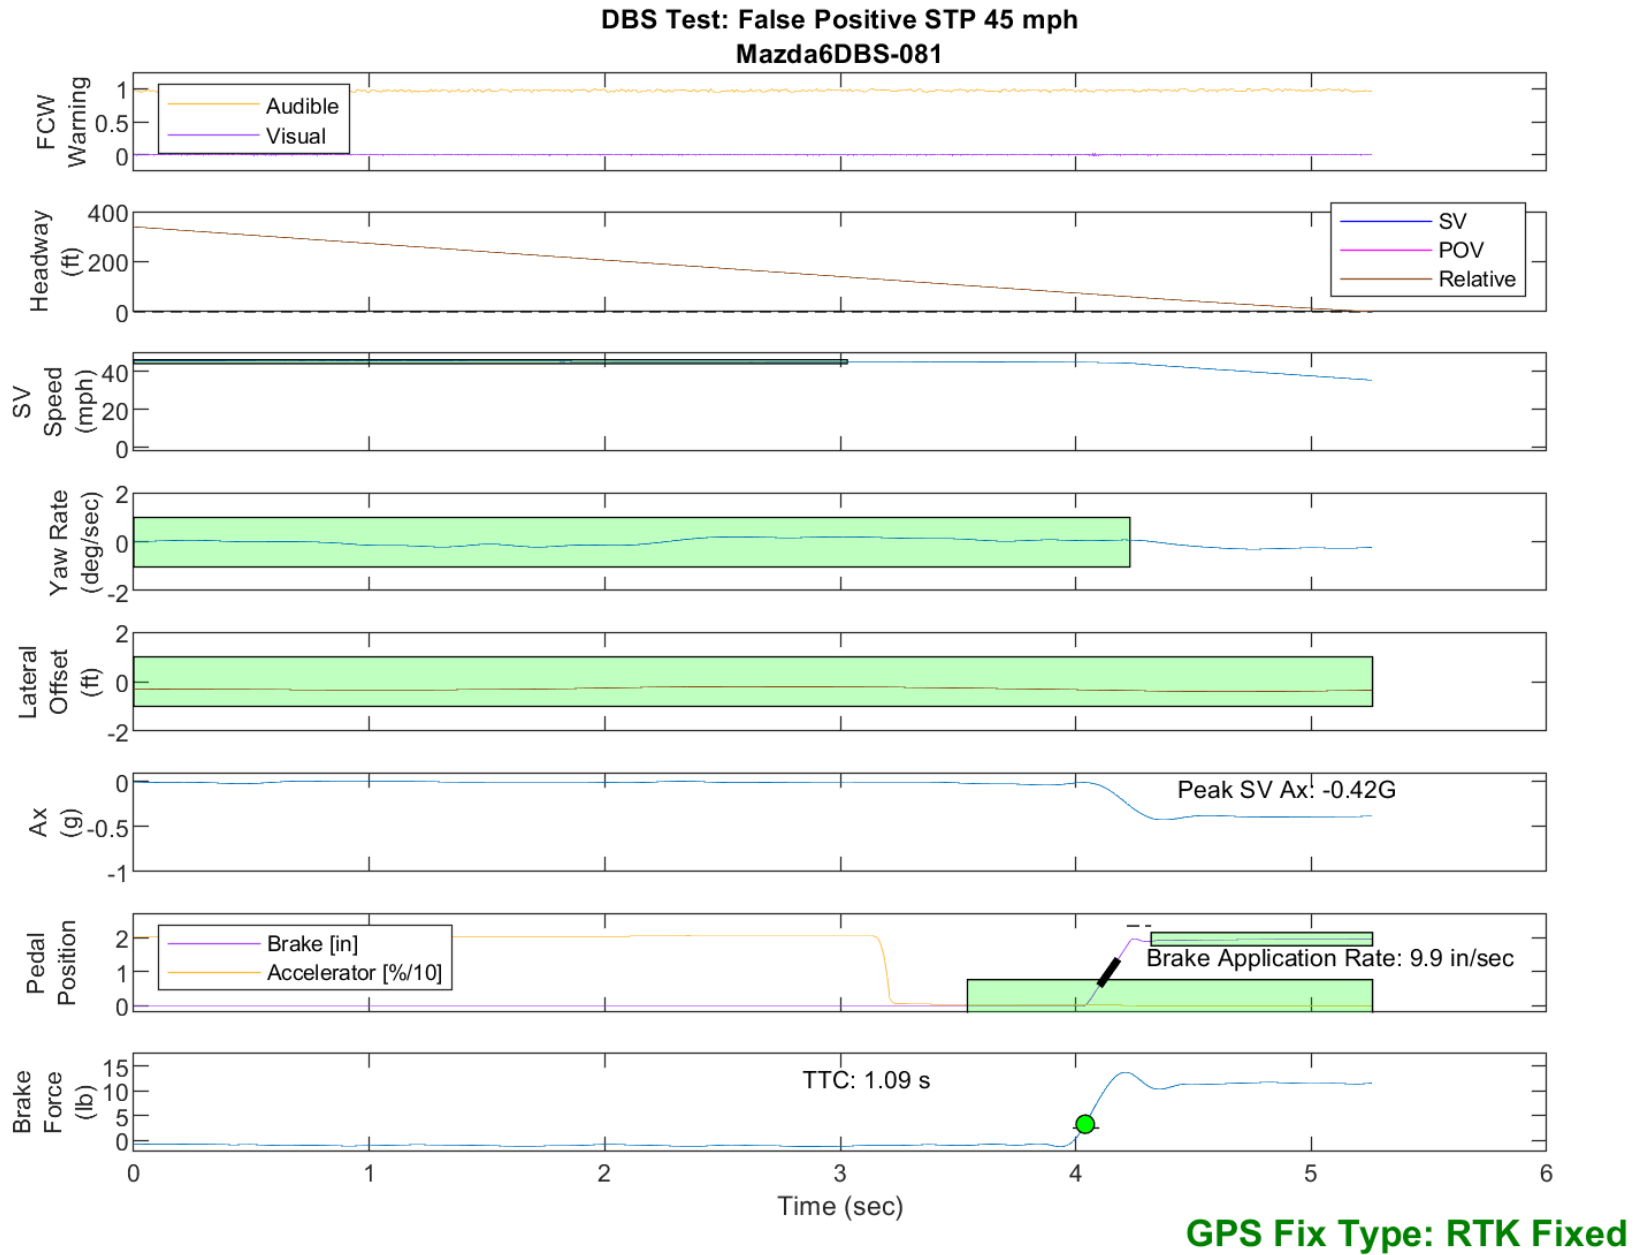


Figure E64. Time History for DBS Run 81, SV Encounters Steel Trench Plate, SV 45 mph

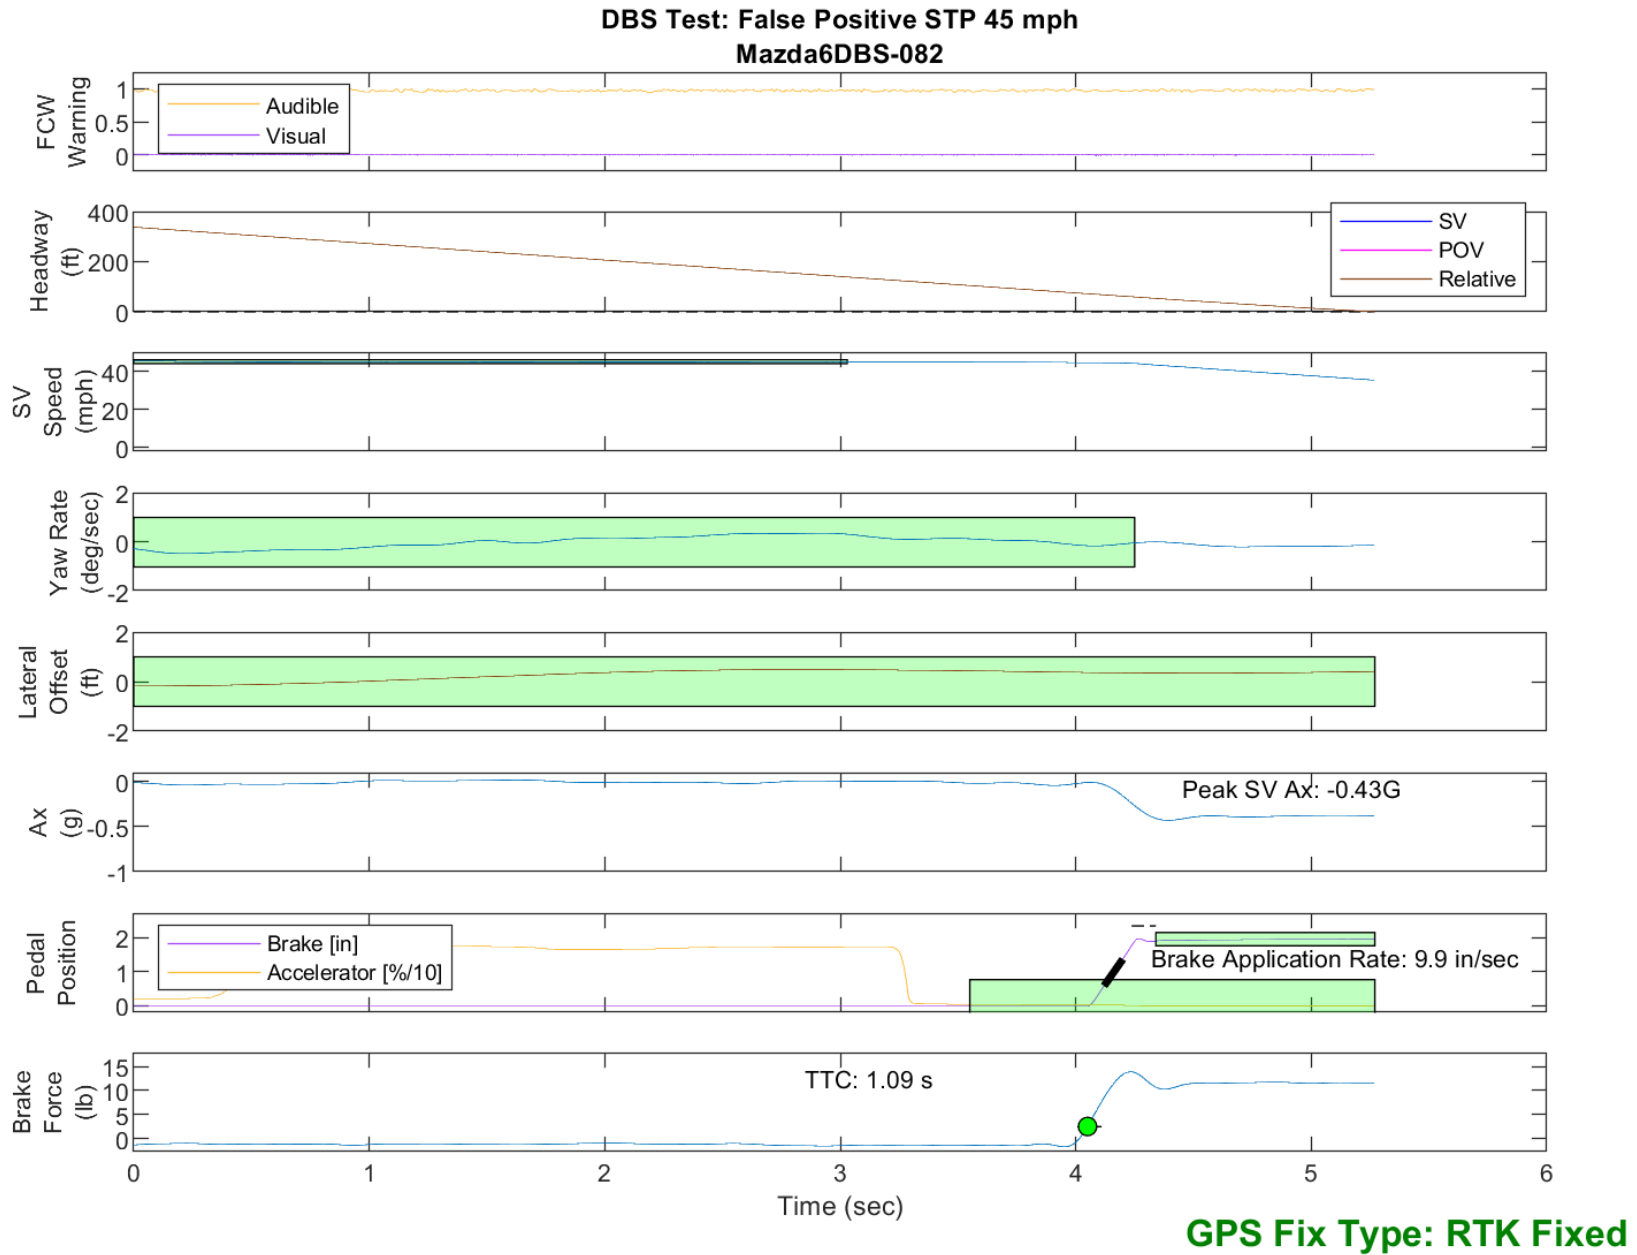


Figure E65. Time History for DBS Run 82, SV Encounters Steel Trench Plate, SV 45 mph

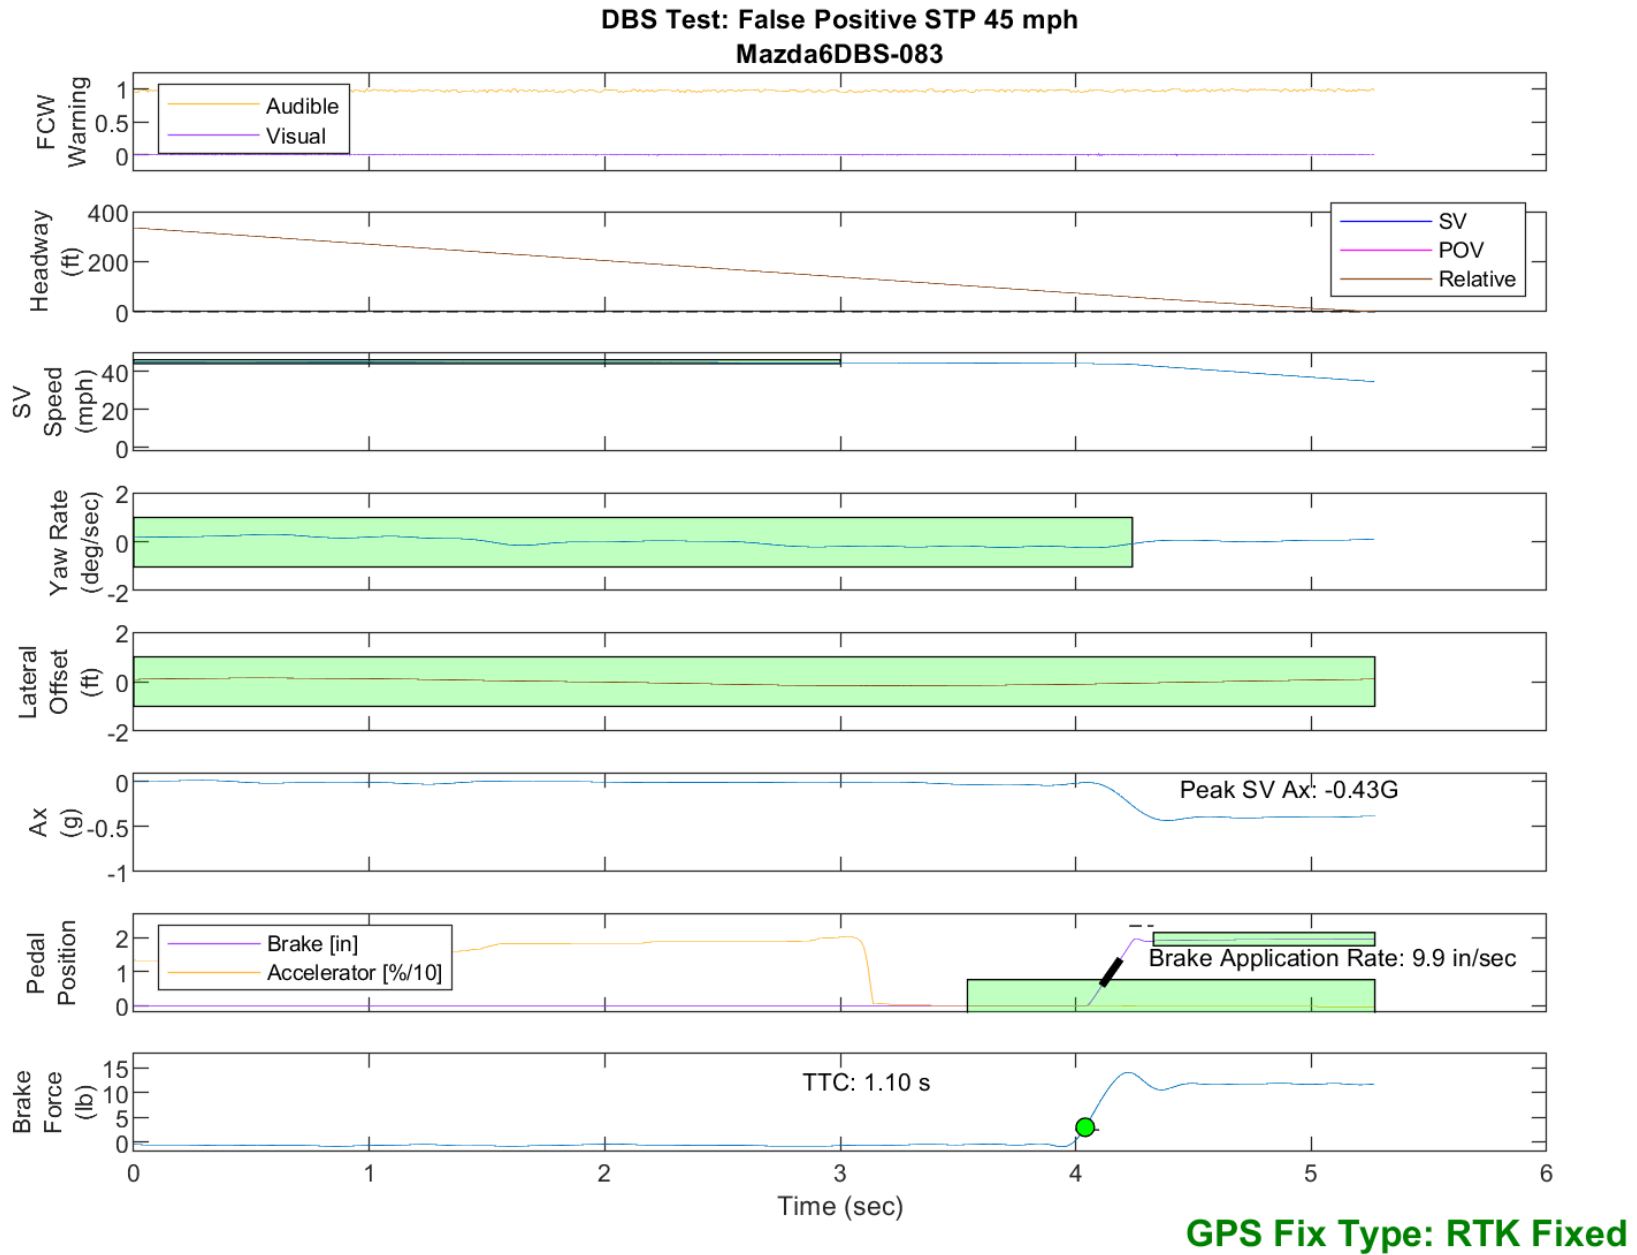


Figure E66. Time History for DBS Run 83, SV Encounters Steel Trench Plate, SV 45 mph



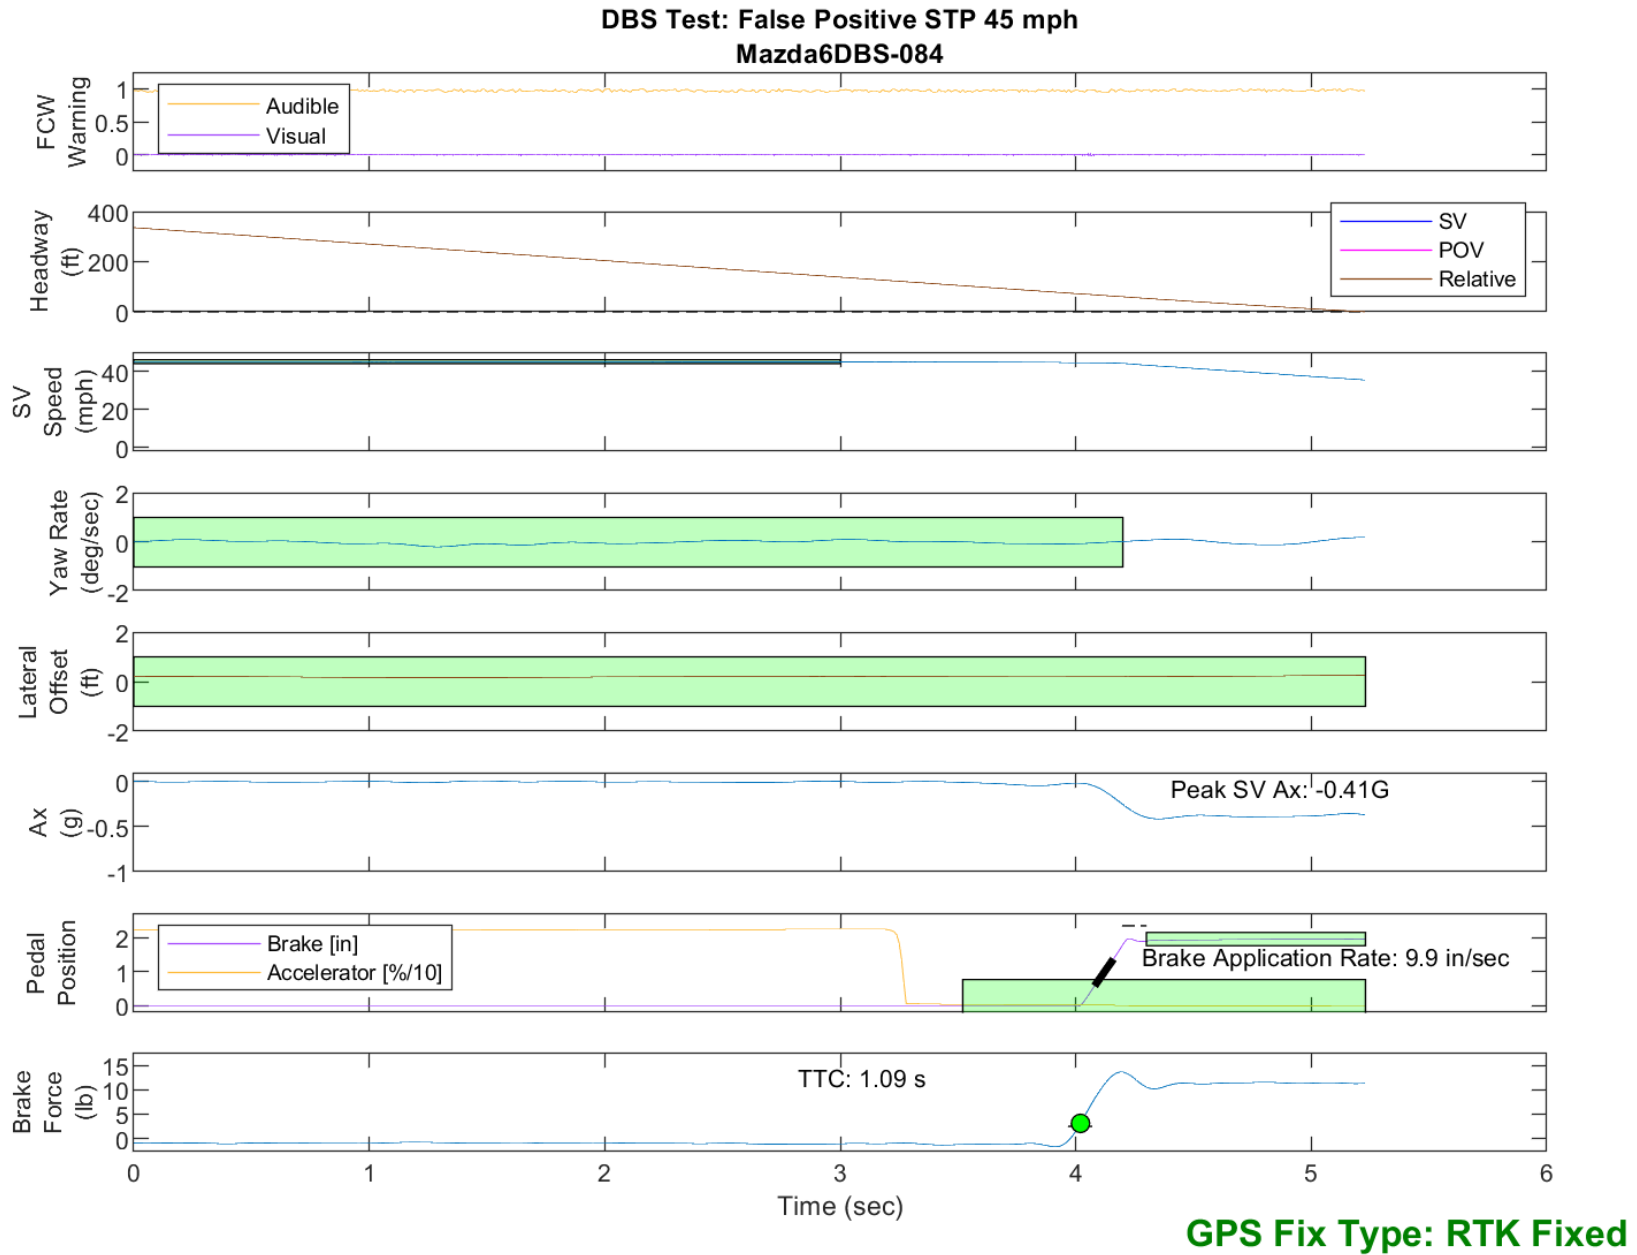


Figure E67. Time History for DBS Run 84, SV Encounters Steel Trench Plate, SV 45 mph

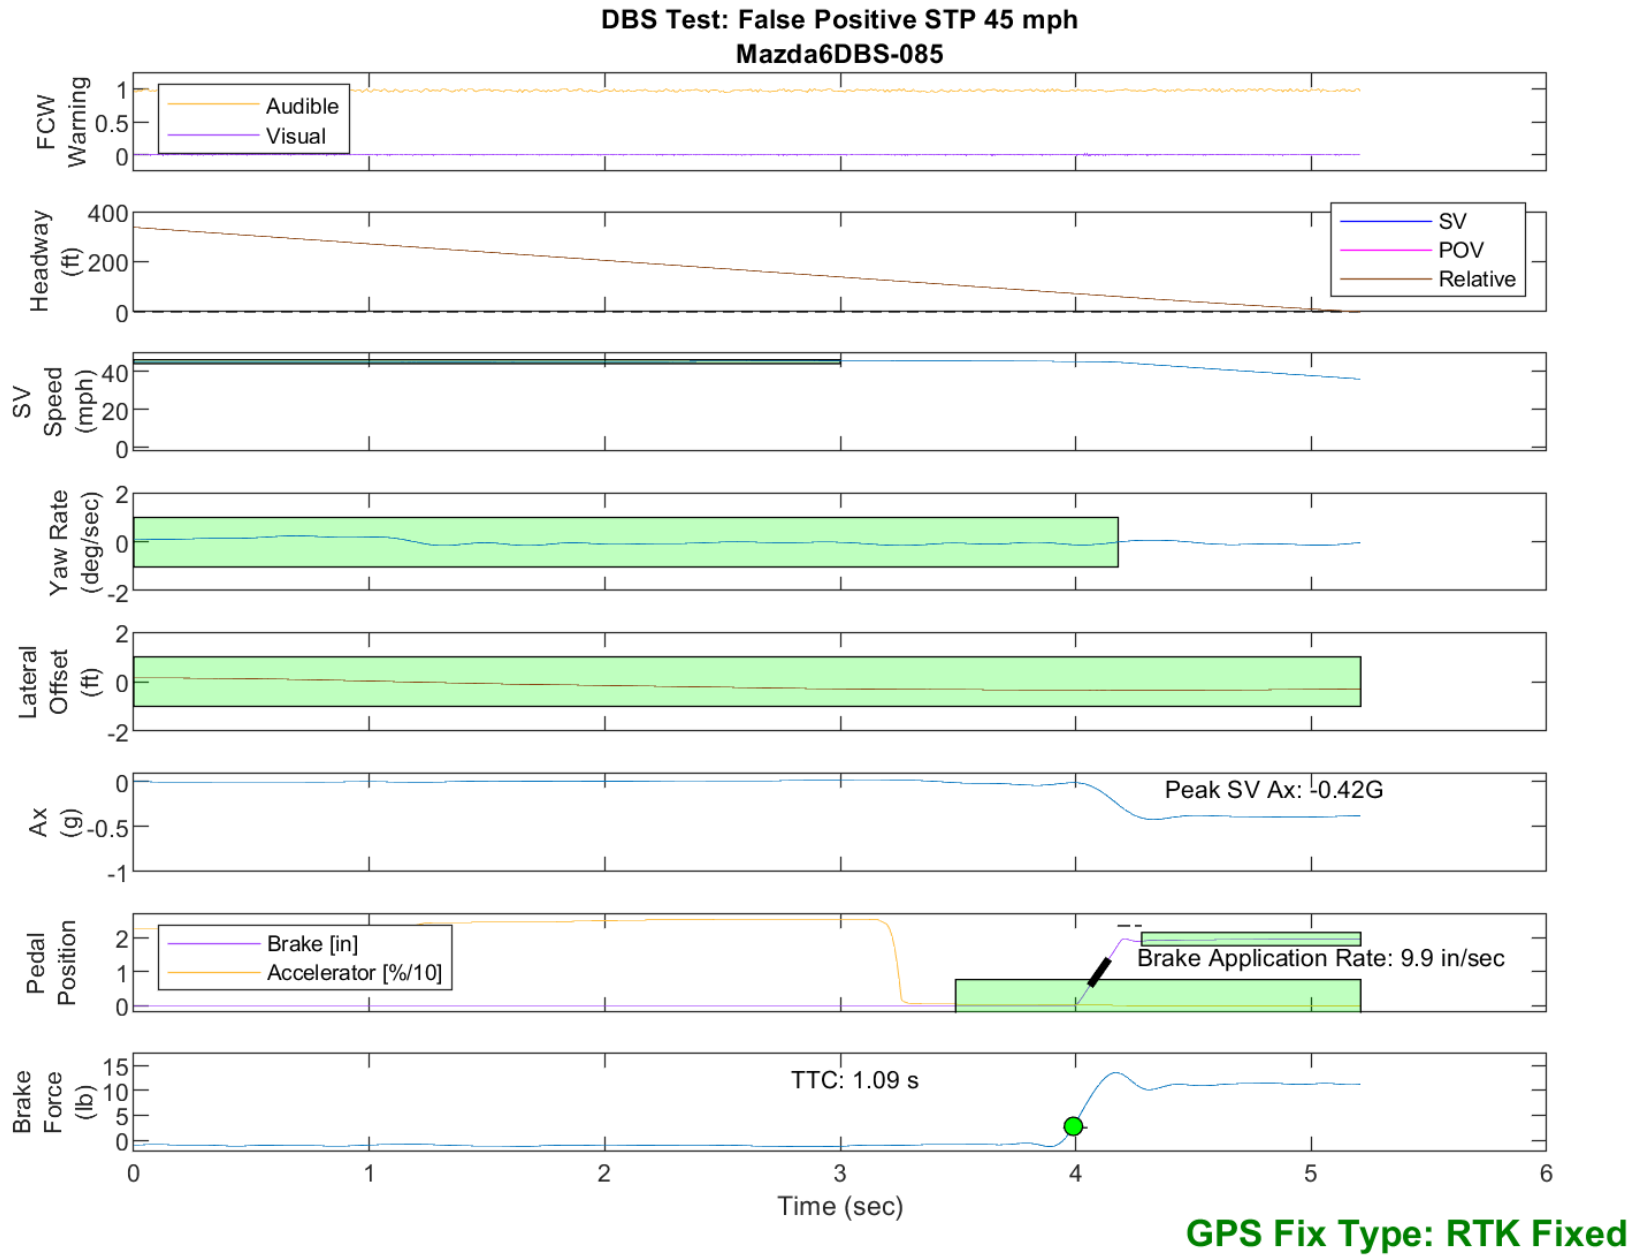


Figure E68. Time History for DBS Run 85, SV Encounters Steel Trench Plate, SV 45 mph

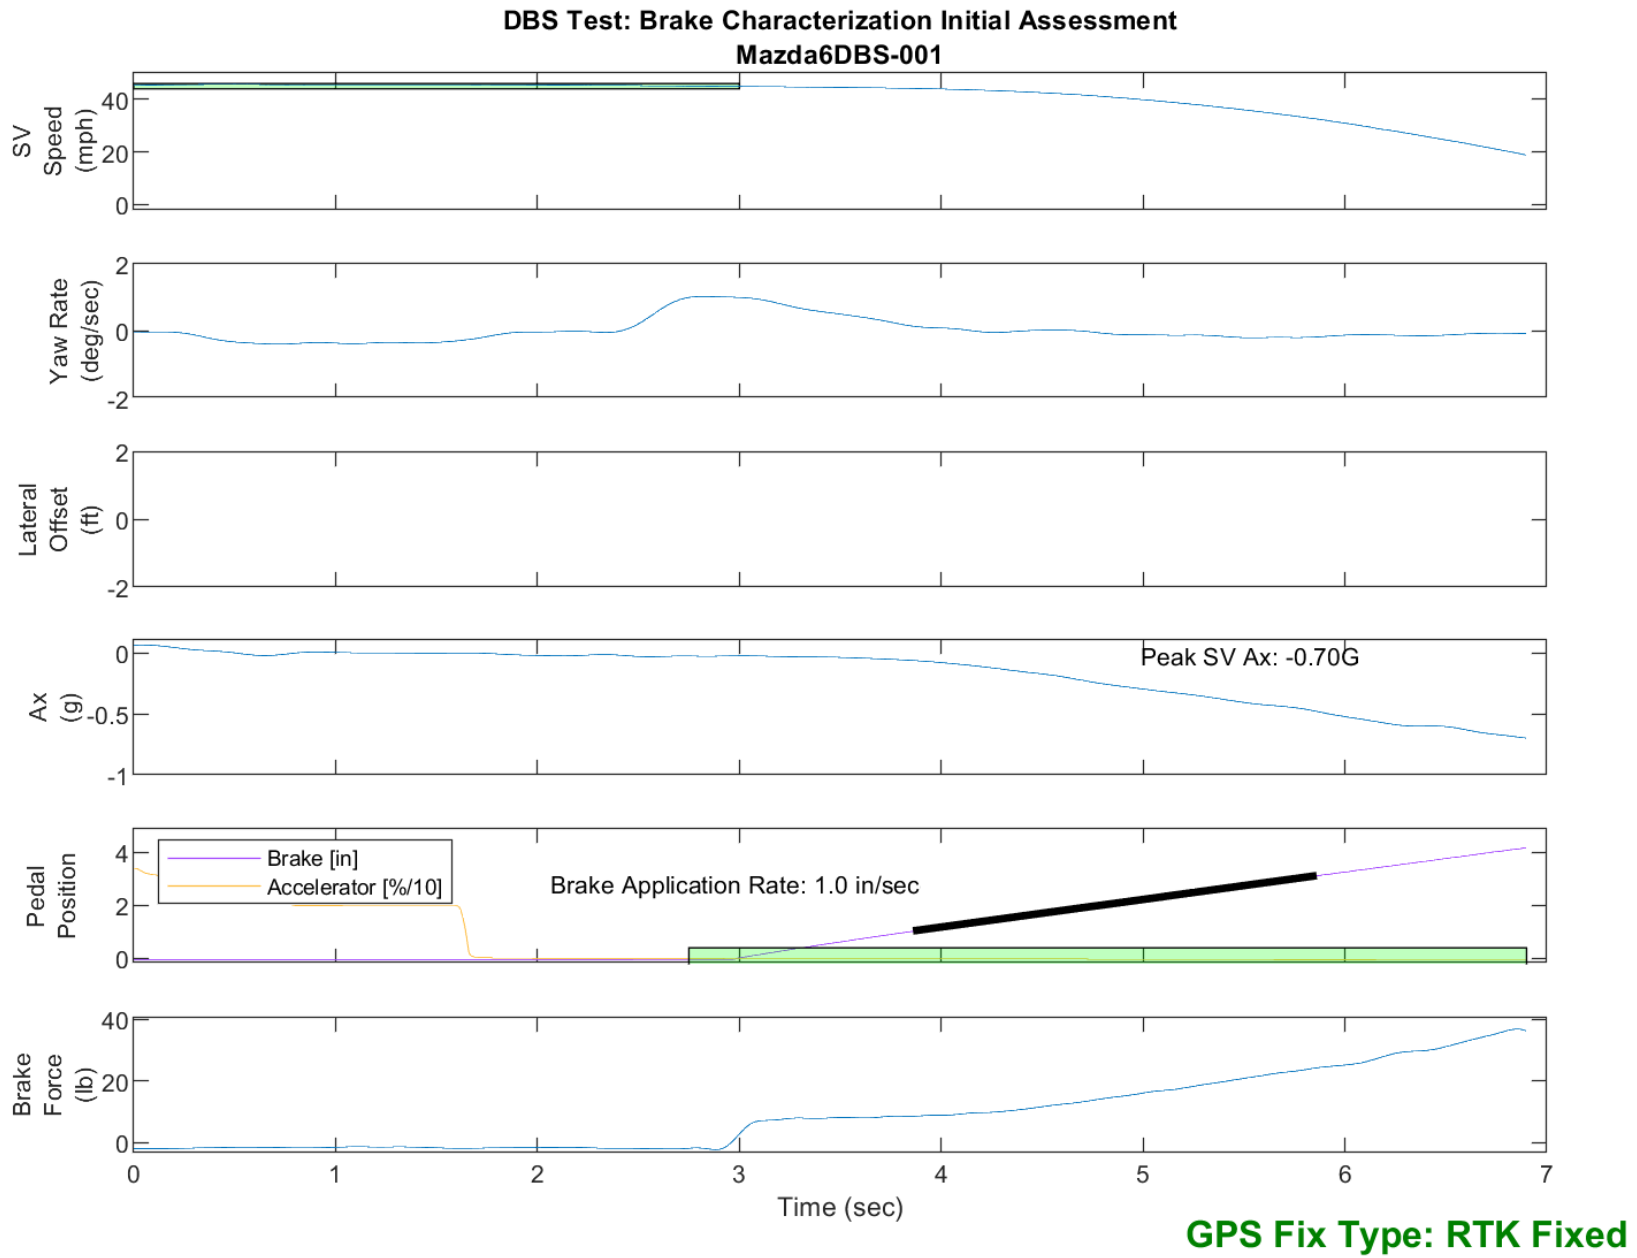


Figure E69. Time History for DBS Run 1, Brake Characterization Initial

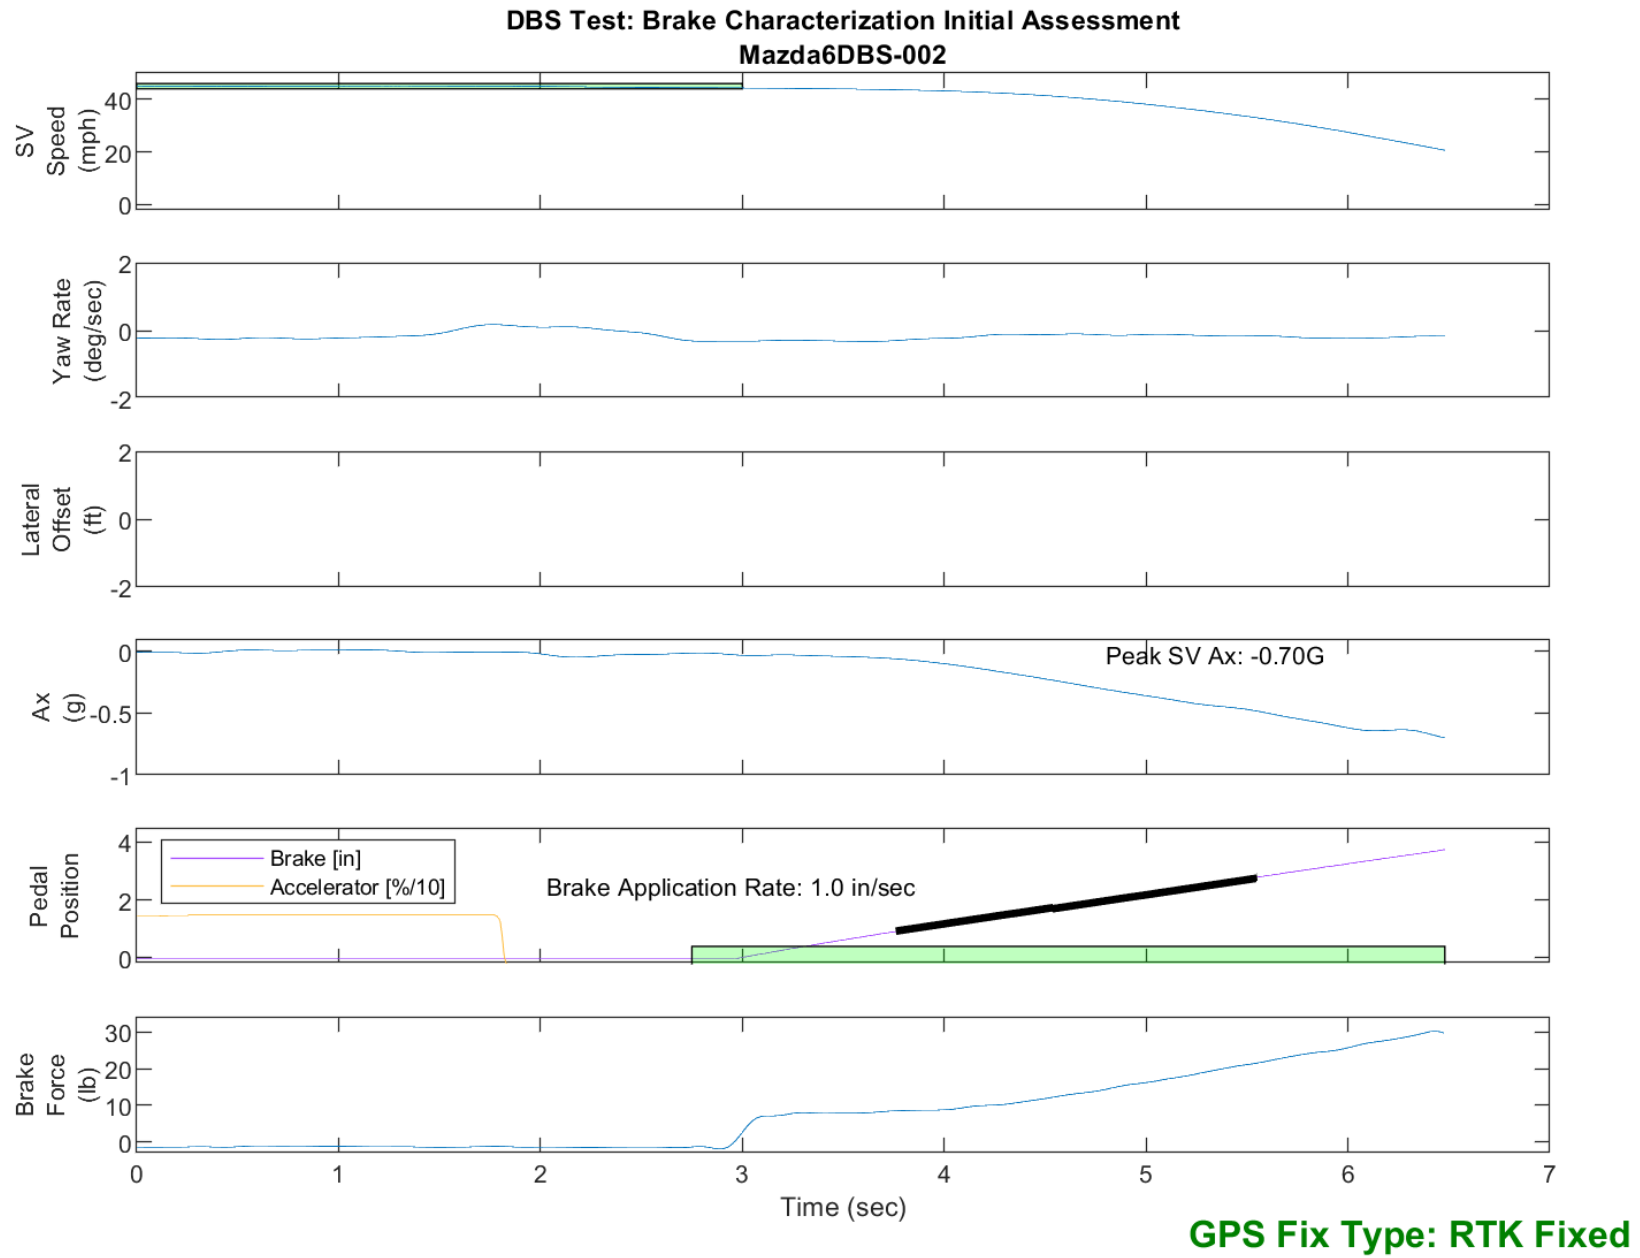


Figure E70. Time History for DBS Run 2, Brake Characterization Initial

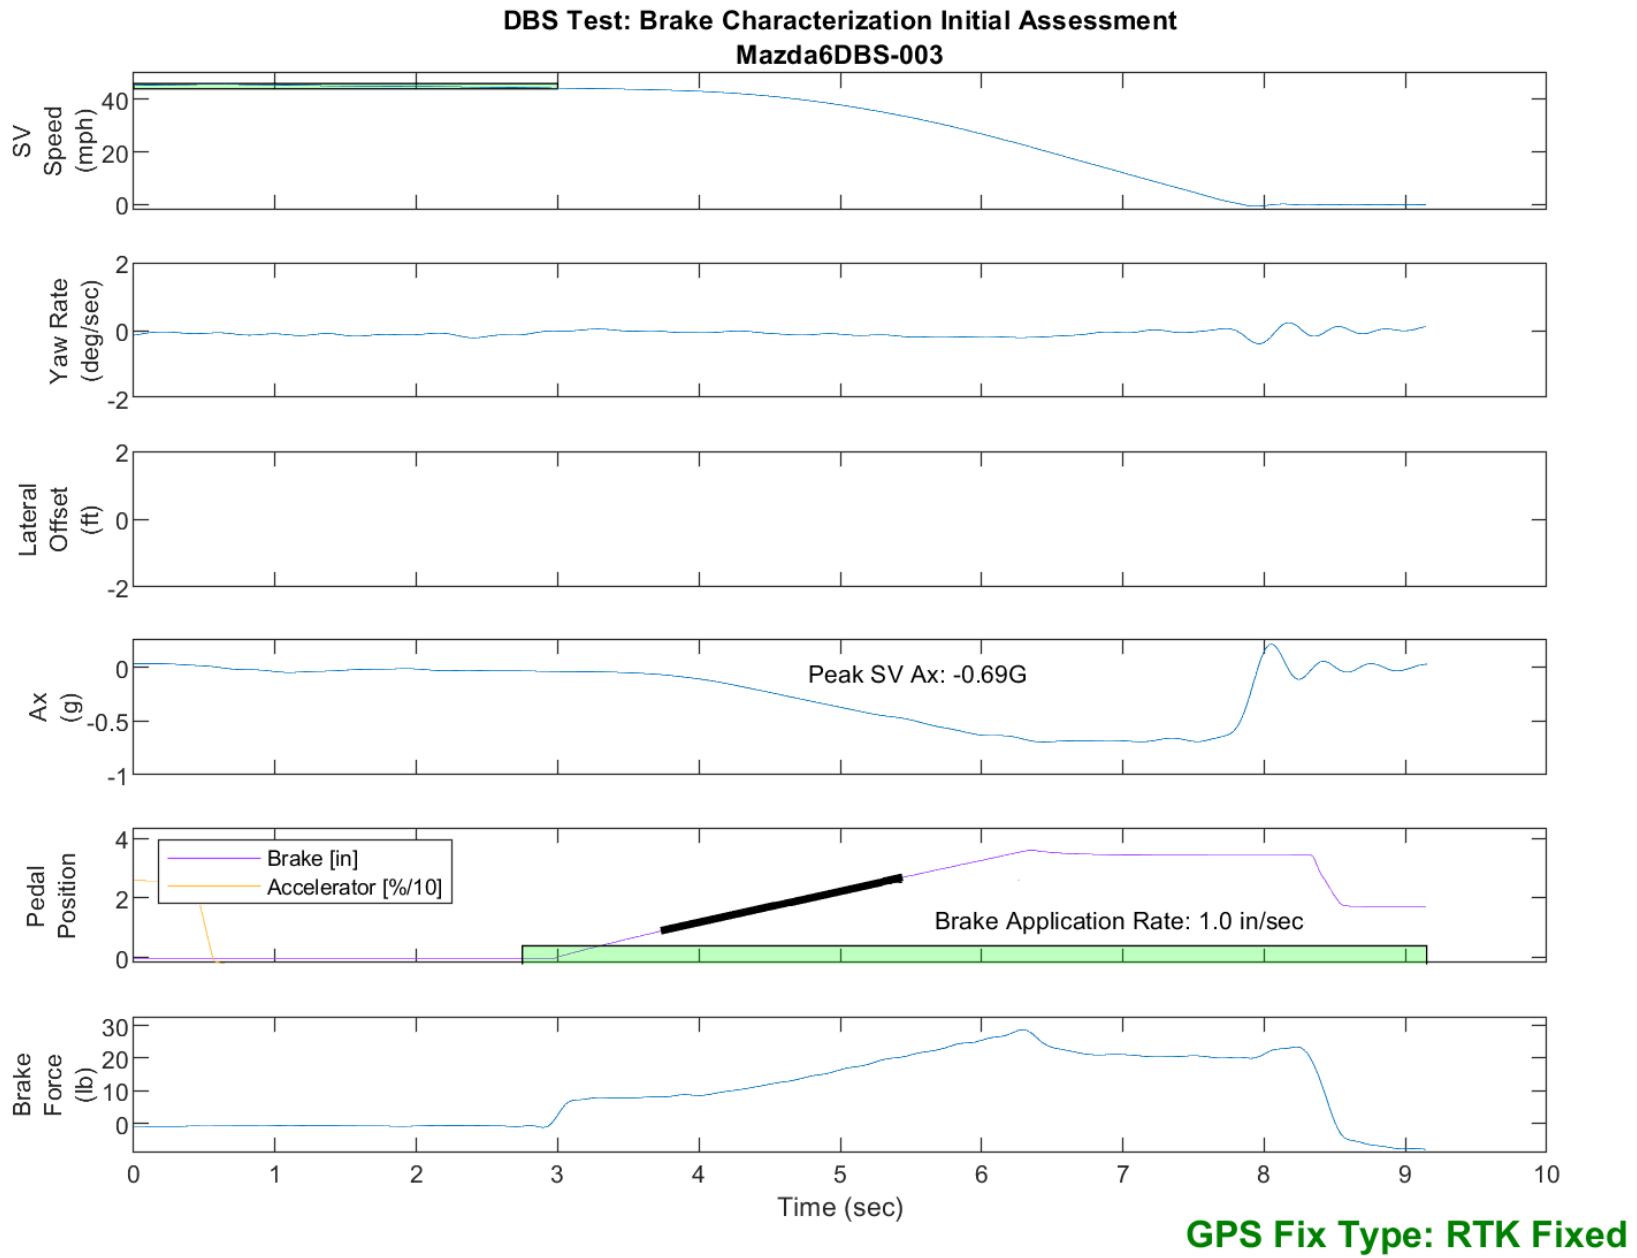


Figure E71. Time History for DBS Run 3, Brake Characterization Initial

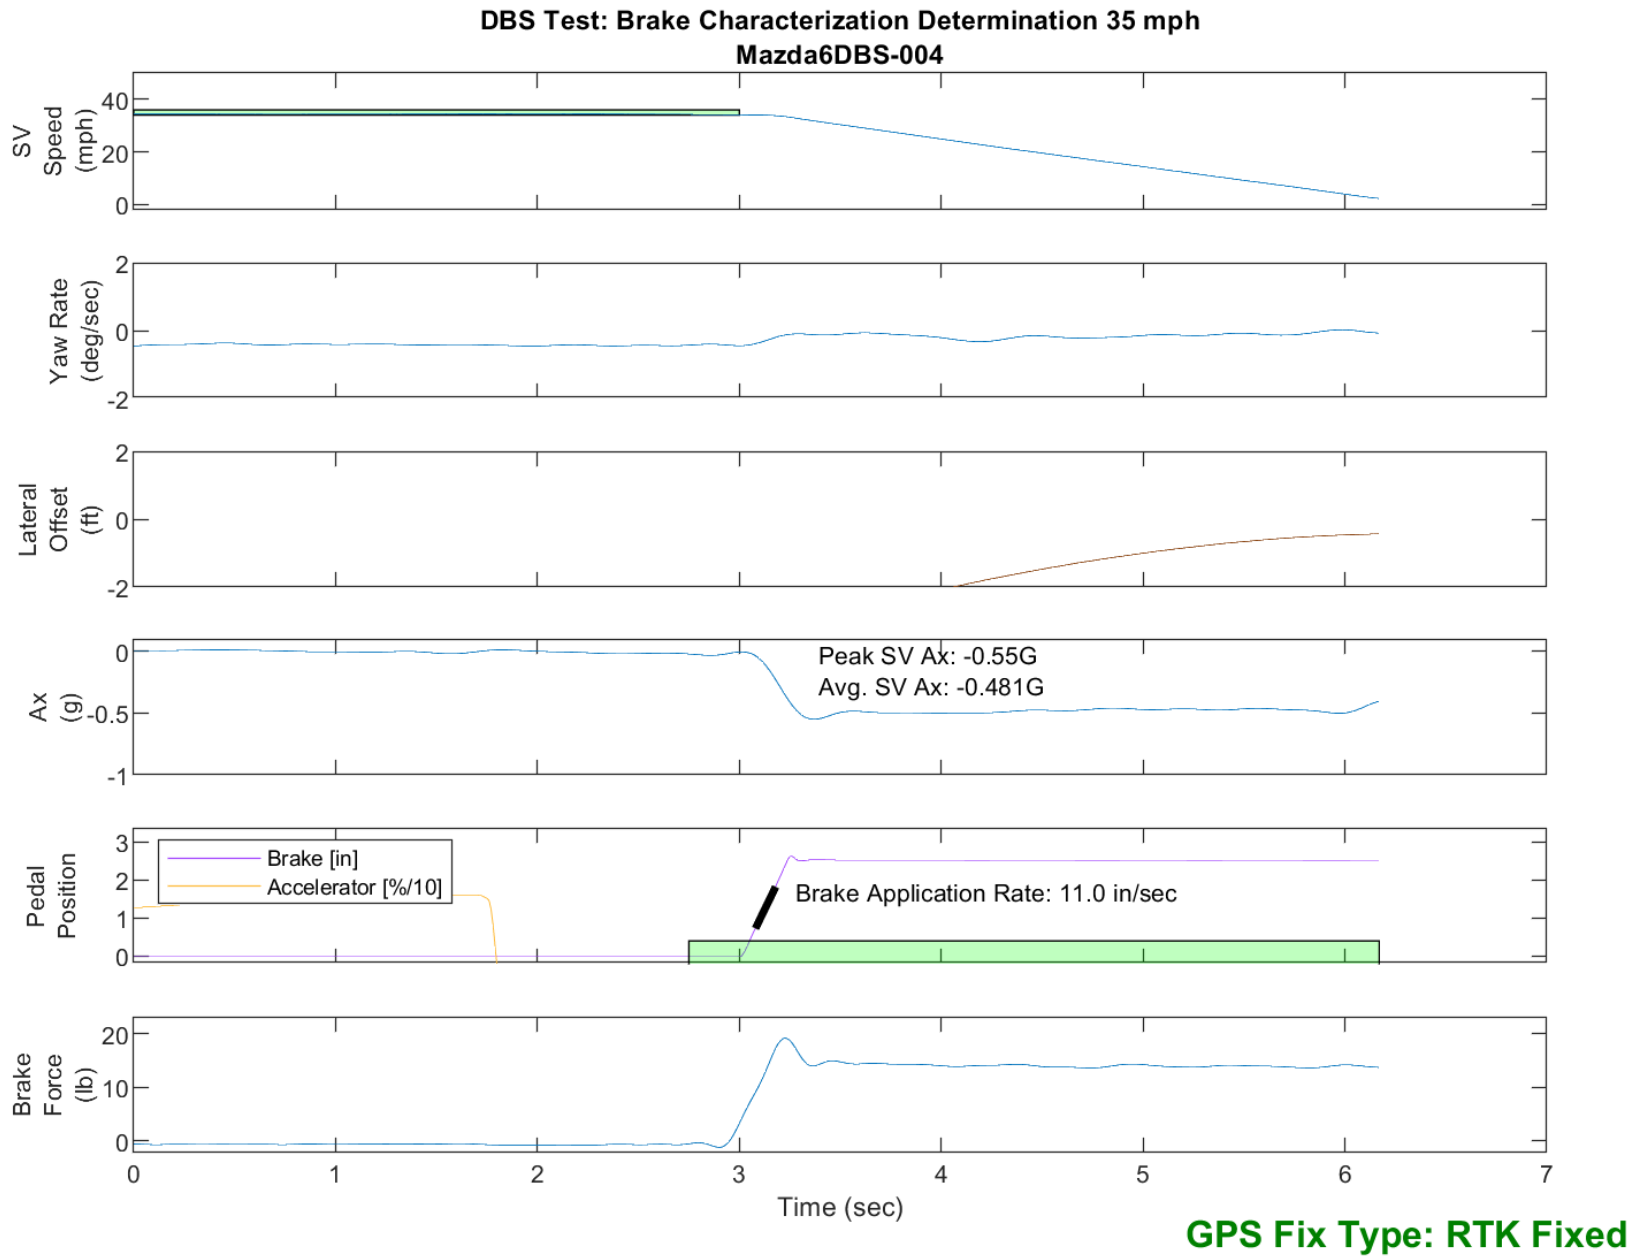


Figure E72. Time History for DBS Run 4, Brake Characterization Determination 35 mph

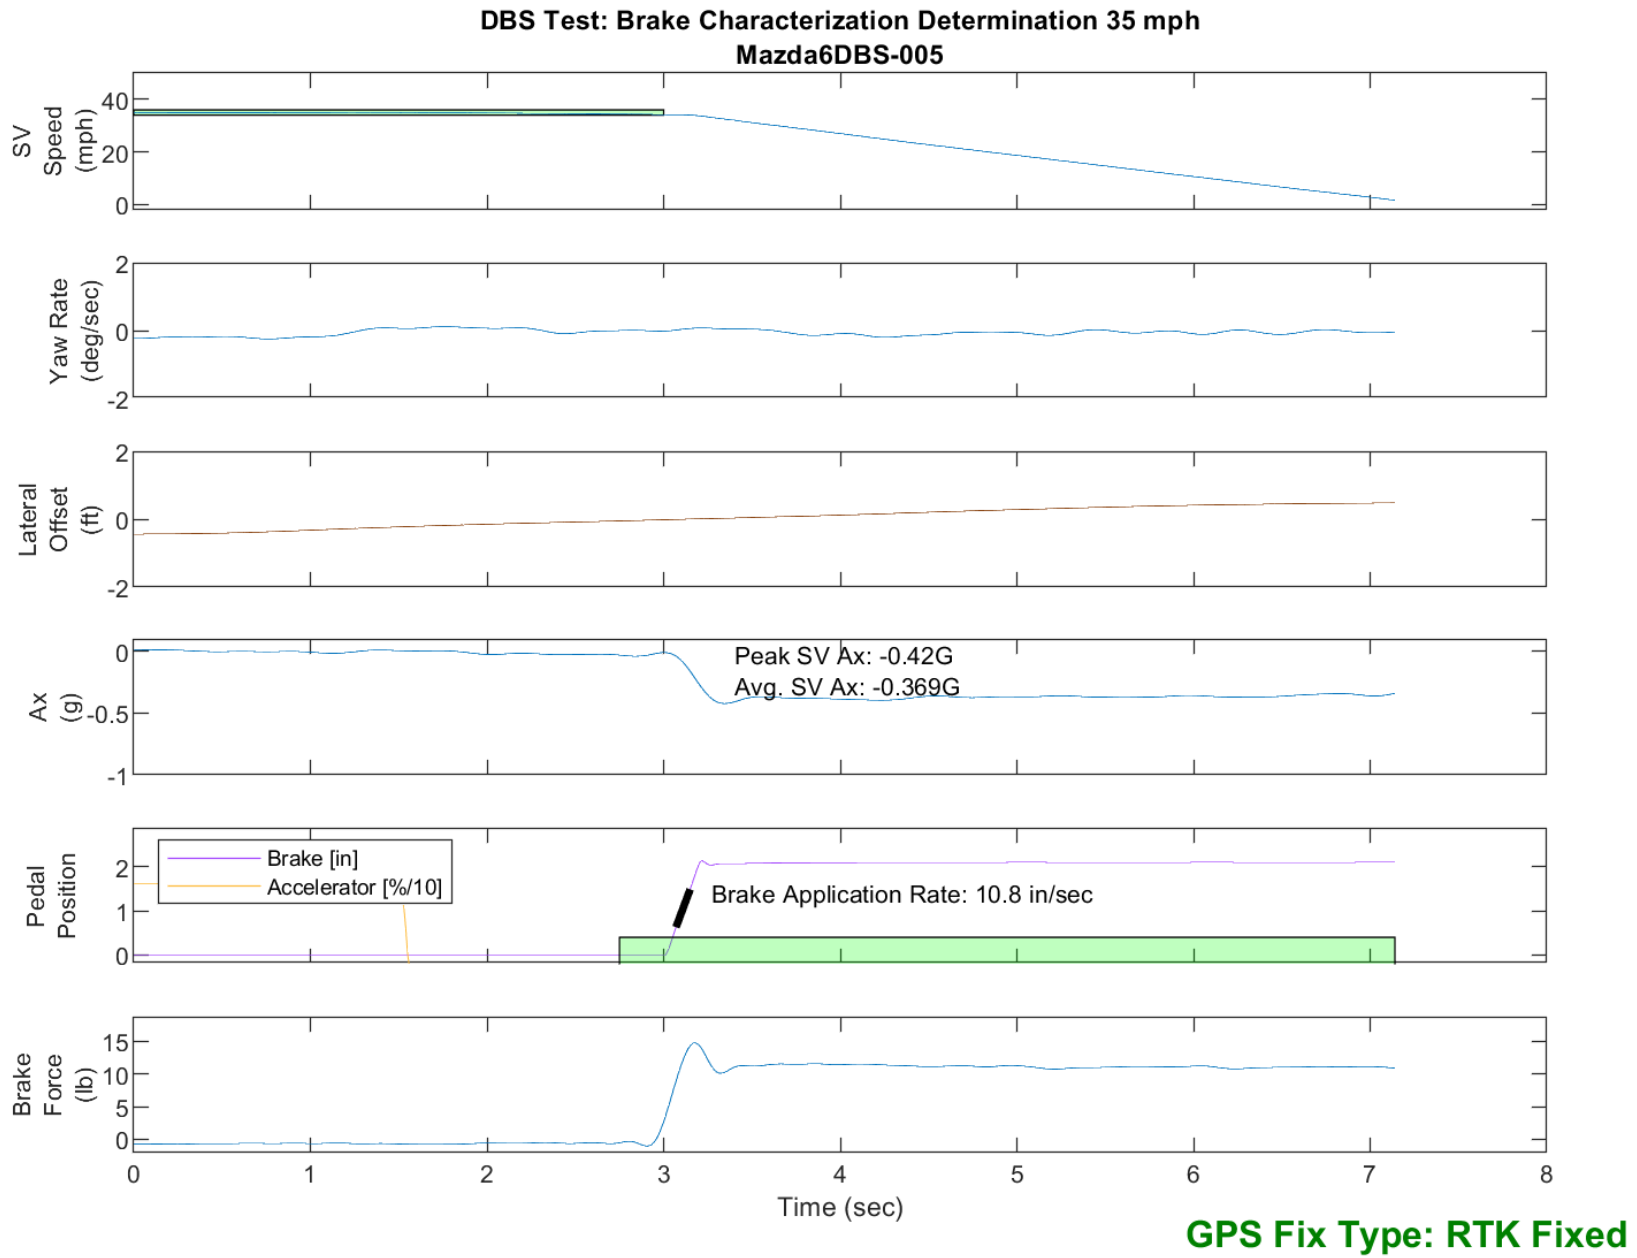


Figure E73. Time History for DBS Run 5, Brake Characterization Determination 35 mph

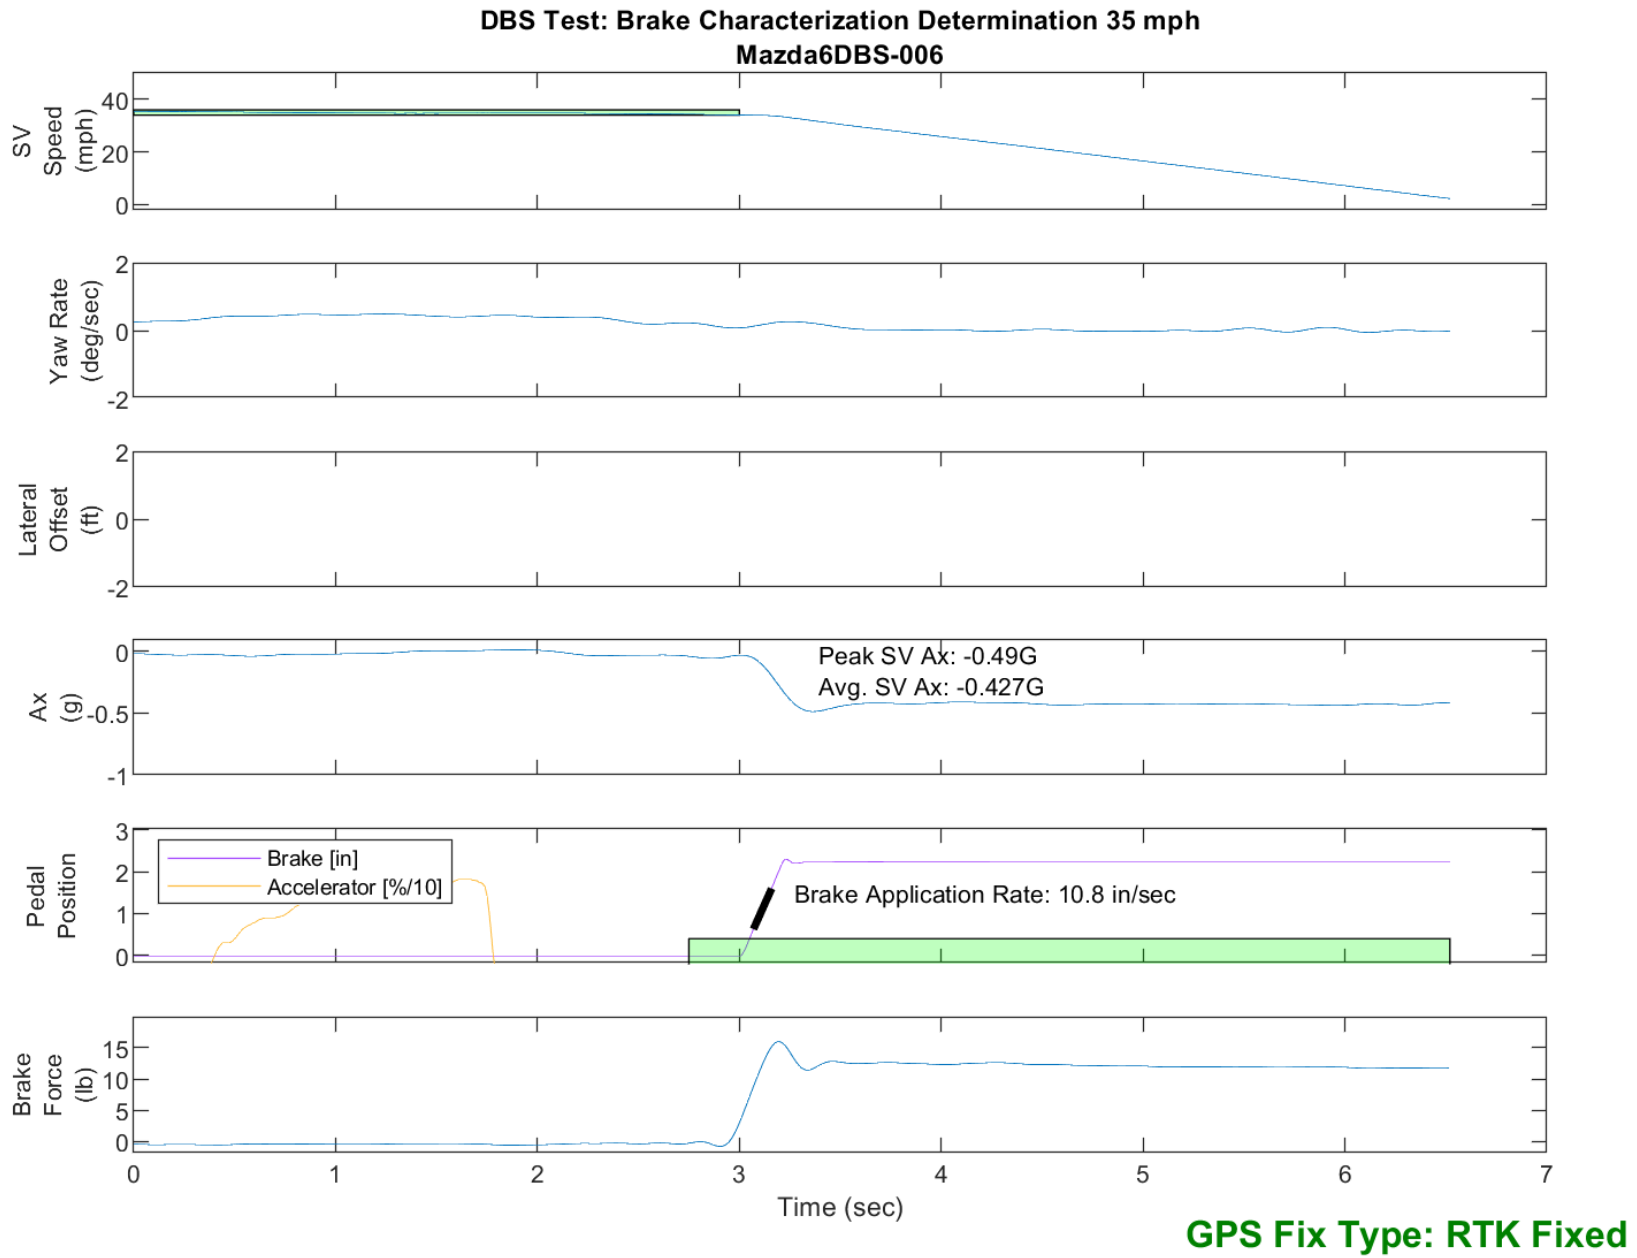


Figure E74. Time History for DBS Run 6, Brake Characterization Determination 35 mph



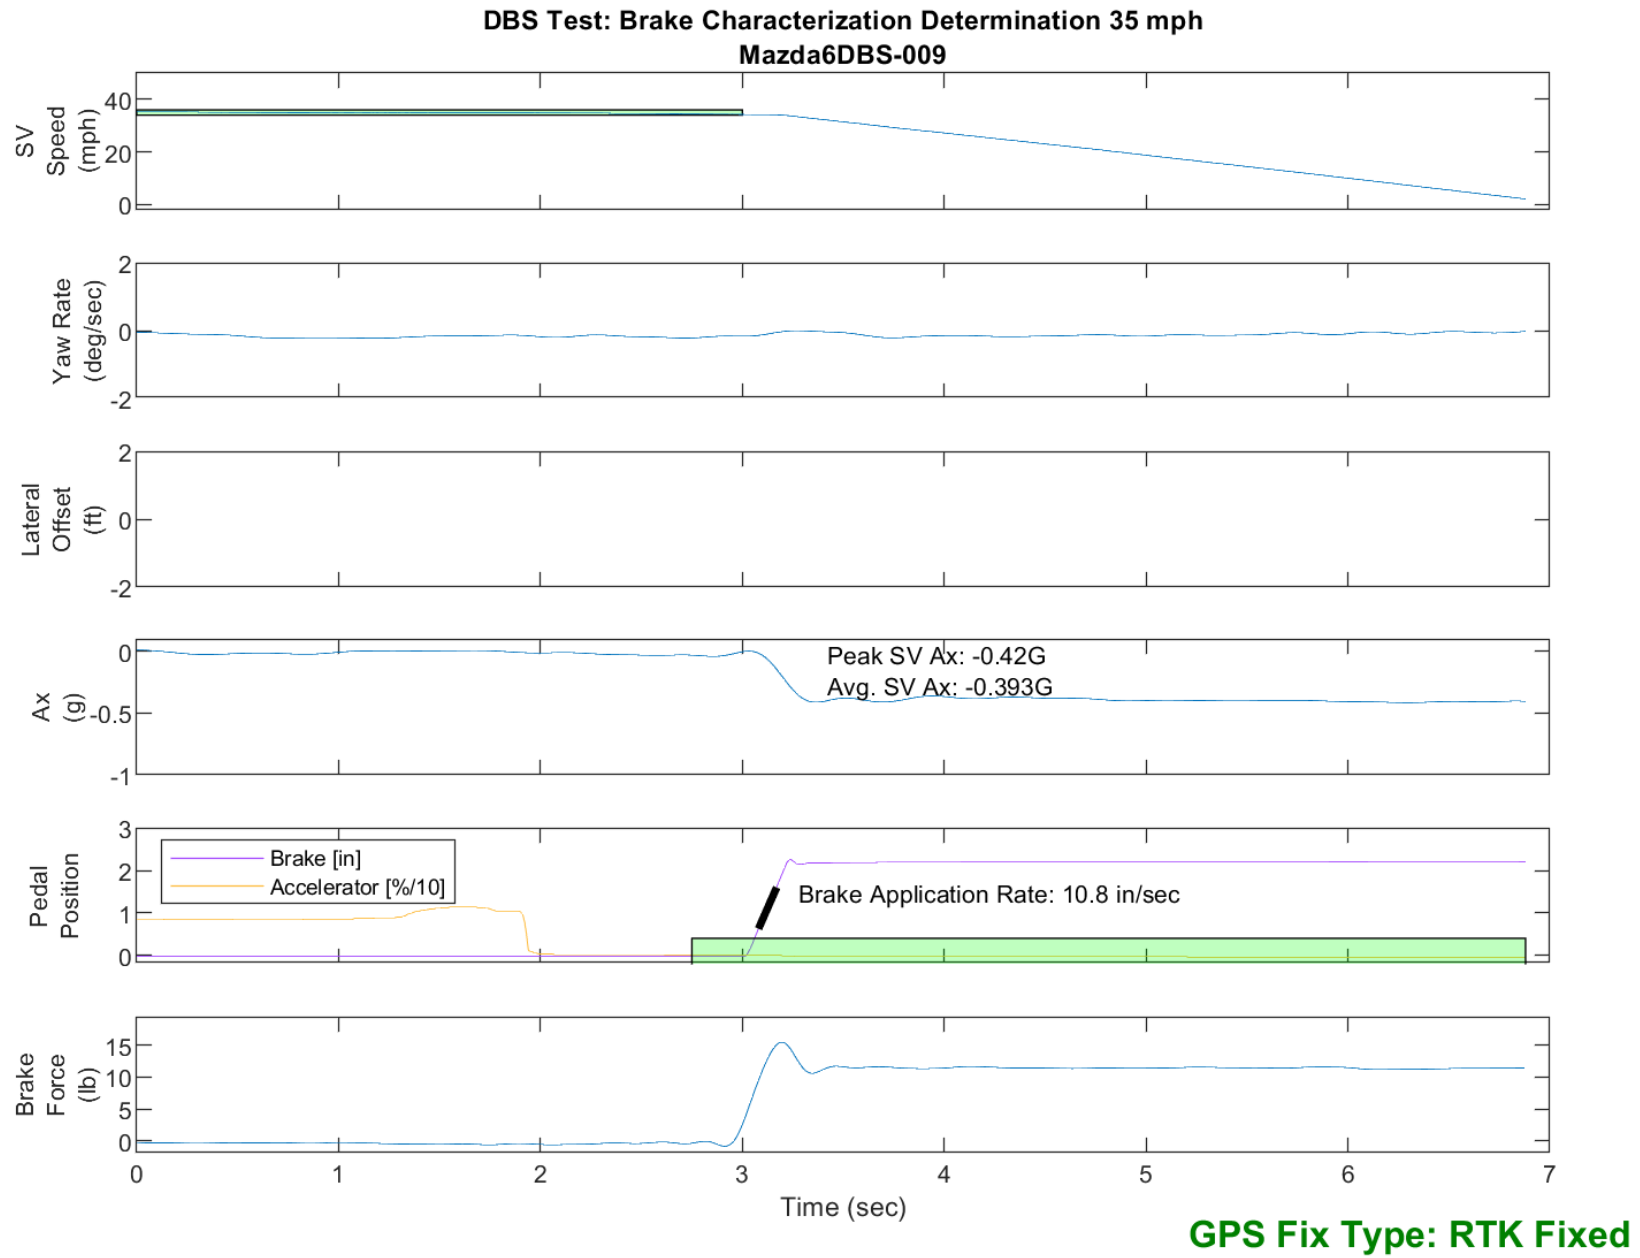


Figure E75. Time History for DBS Run 9, Brake Characterization Determination 35 mph

### DBS Test: Brake Characterization Determination 25 mph Mazda6DBS-010

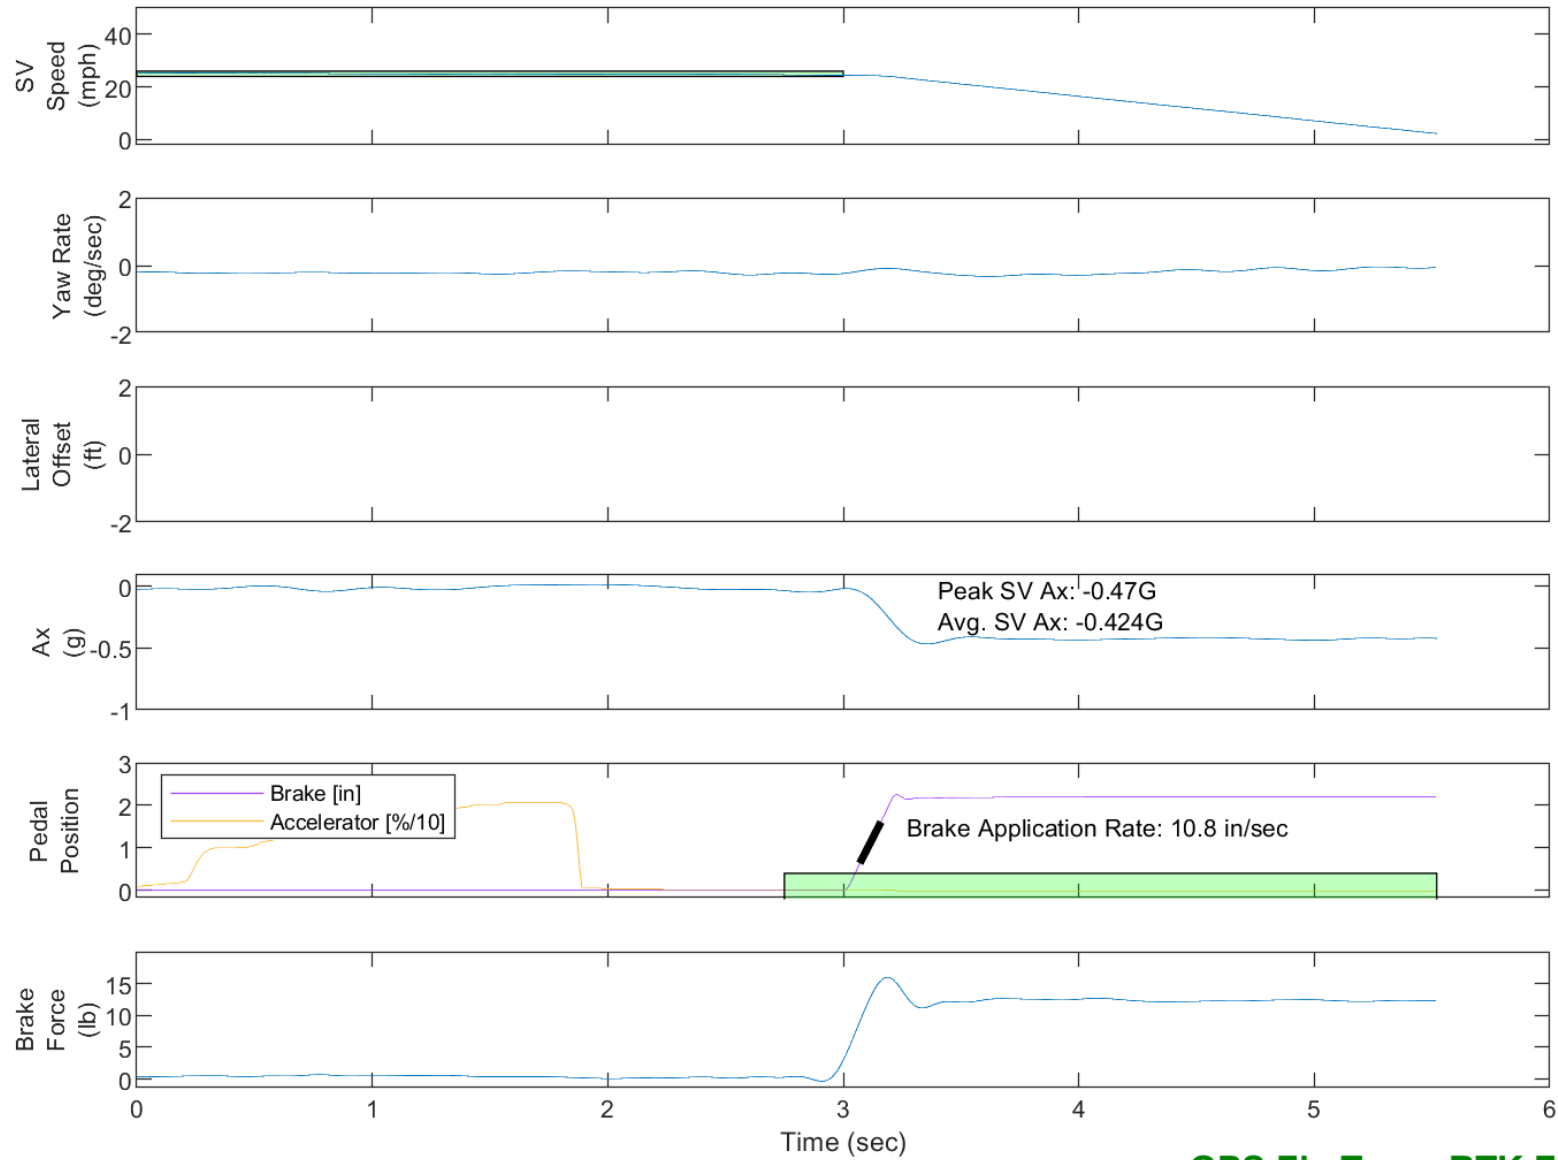


Figure E76. Time History for DBS Run 10, Brake Characterization Determination 25 mph

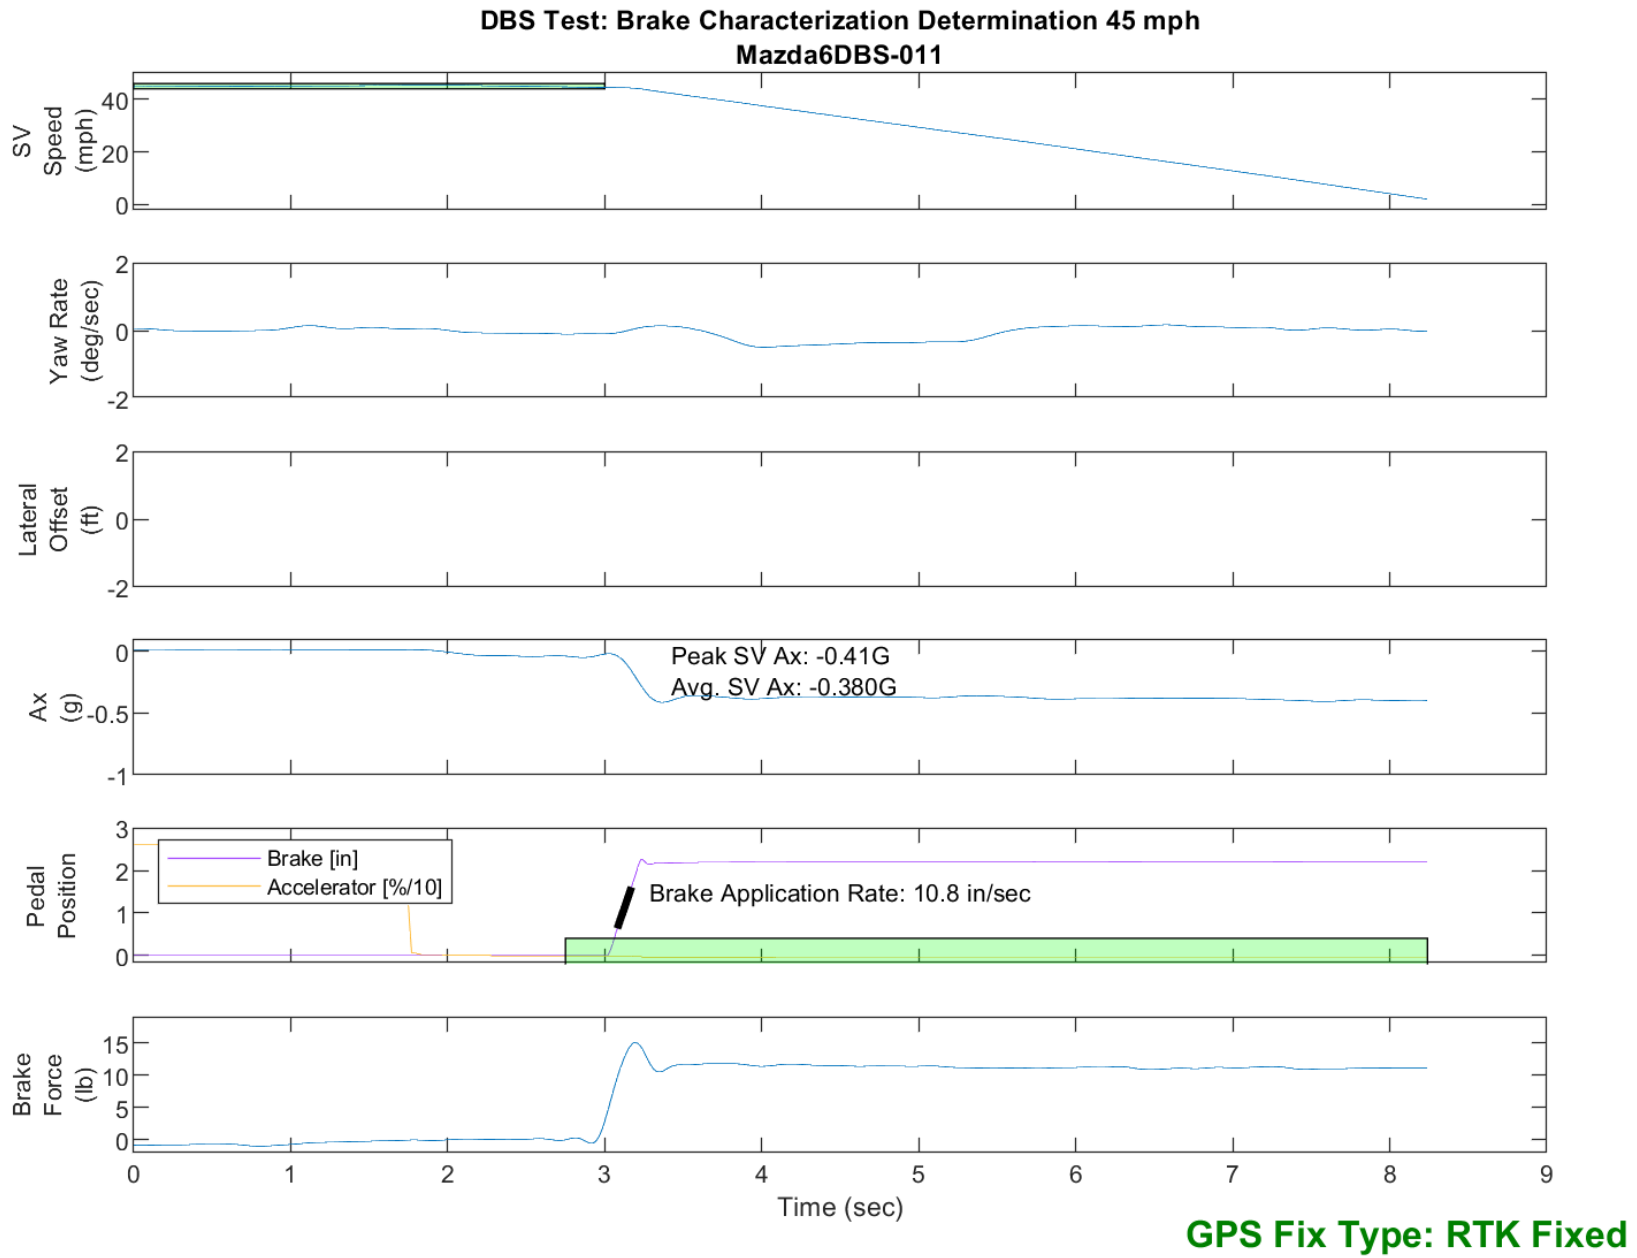


Figure E77. Time History for DBS Run 11, Brake Characterization Determination 45 mph