


REPORT NUMBER: TWG-CAL-19-04

**NEW CAR ASSESSMENT PROGRAM (NCAP)**  
SIDE AIRBAG OUT-OF-POSITION INJURY TESTING

**Ford Motor Company**  
**2019 Ford Edge**

NHTSA NUMBER: M20190202TWG2  
CALSPAN TEST NUMBER: CT2019-04

**PREPARED BY:**  
**CALSPAN CORPORATION**  
4455 Genesee St.  
**BUFFALO, NEW YORK 14225**

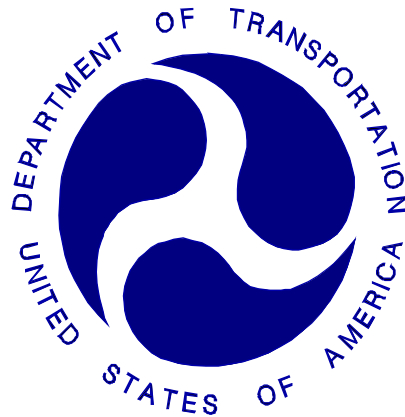


June 24, 2020

DRAFT REPORT

Alpha Technology Associate, Inc.  
2810 Old Lee Highway, Suite 120  
Fairfax, VA 22031

This Final Test Report was prepared for the U.S. Department of Transportation, National Highway Traffic Safety Administration, under Contract No. DTNH22-13-D-00311L, Alpha Technology PO 12GC150. This document is disseminated under the sponsorship of the U.S. Department of Transportation in the interest of information exchange. The United States Government assumes no liability for its contents or use thereof.

Prepared By:   
Zachary Granby, Test Engineer

Approved By:   
Vanessa Hansen, Program Manager

Approval Date: June 24, 2020

FINAL REPORT ACCEPTANCE BY:

Accepted By: \_\_\_\_\_

Acceptance Date: \_\_\_\_\_

**TECHNICAL REPORT STANDARD TITLE PAGE**

1. Report No. TWG-CAL-19-04		2. Government Accession No.		3. Recipient's Catalog No.		
4. Title and Subtitle Final Report 2019 Ford Edge , TWG/Out-of-Position Tests NHTSA No.: M20190202TWG2				5. Report Date June 24, 2020		
				6. Performing Organization Code CAL		
7. Author(s)  Zachary Granby, Test Engineer Vanessa Hansen, Program Manager				8. Performing Organization Report No. CT2019-04		
9. Performing Organization Name and Address Calspan Corporation 4455 Genesee St. Buffalo, New York 14225				10. Work Unit No.		
				11. Contract or Grant No. DTNH22-13-D-00311L		
12. Sponsoring Agency Name and Address Alpha Technology Associate, Inc. 2810 Old Lee Hwy, Suite 120 Fairfax, VA 22031				13. Type of Report and Period Covered Final Report, June 24, 2020		
				14. Sponsoring Agency Code NRM-110		
15. Supplementary Notes						
16. Abstract This side airbag Out-Of-Position test was performed in conjunction with a New Car Assessment Program (NCAP) on a 2019 Ford Edge. This test was conducted at the Calspan Test Facility in Buffalo, New York, on July 31, 2019.						
<b>Injury Summary</b>						
<b>HIC15</b>	<b>Peak Tension (CFC1000)</b>	<b>Peak Compression (CFC1000)</b>	<b>NIJ(NTF)</b>	<b>NIJ(NTE)</b>	<b>NIJ(NCF)</b>	<b>NIJ(NCE)</b>
28.72	228.391	-1852.987	0.090	0.188	0.594	0.474
17. Key Words New Car Assessment Program (NCAP) Side Airbag Out-Of-Position				18. Distribution Statement <u>Copies of this report are available from:</u> Alpha Technology Associate, Inc. 2810 Old Lee Hwy, Suite 120 Fairfax, VA 22031 Phone: (703) 876-0010 Fax: (703) 876-0120		
19. Security Classification of Report UNCLASSIFIED		20. Security Classification of Page UNCLASSIFIED		21. No. of Pages 33		22. Price

## TABLE OF CONTENTS

<u>Section</u>		<u>Page No.</u>
1	PURPOSE AND SUMMARY OF TEST	1-1
2	DATA SHEETS	2-1
	Data Sheet 1 – Test Summary	2-1
	Data Sheet 2 – Vehicle Parameter Data	2-2
	Data Sheet 3 – Dummy Positioning in Vehicle	2-3
	Data Sheet 4 – Dummy Injury Criteria Values	2-4
A	PHOTOGRAPHS	A-1
B	DUMMY RESPONSE DATA TRACES	B-1
C	TEST EQUIPMENT LIST AND CALIBRATION INFORMATION	C-1

## SECTION 1

### PURPOSE AND SUMMARY OF TEST:

#### 1.1 PURPOSE

The purpose of this test was to obtain data from a static out-of-position side air bag deployment using a vehicle that had previously undergone a New Car Assessment Program (NCAP) sponsored side moving deformable barrier impact test requested by the National Highway Traffic Safety Administration (NHTSA). This test was performed under NHTSA contract No. DTNH22-13-D-00311L and through Alpha Technology Associate, Inc.

#### 1.2 SUMMARY

The effects of both a seat-mounted side airbag and a curtain airbag deployment in a 2019 Ford Edge on an out-of-position SID-IIs ATD were evaluated. The test was performed by Calspan on July 31, 2019. Pre-and post-test photographs of the vehicle and ATD can be found in Appendix A.

Three high-speed digital cameras were used to document the side airbag deployment event. Images were recorded at rates of 1000 frames per second. The cameras were placed perpendicular to the right-front passenger seat centerline, Oblique, and through the passenger window to capture the deployment event from various positions.

The SID-IIs anthropomorphic test device (ATD) was placed in the right front (passenger) seat facing toward the center of the vehicle with its arm against the seatback according to the ATD placement instructions specified by Alpha Technology Associate, Inc. who referenced the Recommended Procedures for Evaluating Occupant Injury Risk from Deploying Side Airbags as prepared by the Side Airbag Out-of-Position Injury Technical Working Group (TWG). This orientation complies with section 3.3.5.3 of the TWG Recommended Procedures for Evaluating Occupant Injury Risk from Deploying Side Airbags as defined by Lund, et al and the Technical Working Group First Revision dated July, 2003.

The SID-IIs ATD was instrumented with head x, y and z accelerometers. In addition, a six axis upper and lower neck load cell sensor was utilized to record the resulting neck forces and moments during the event.

Eighteen channels of data were recorded using an on-board data acquisition system. Appendix A contains photographs. Appendix B contains ATD response data traces. Appendix C contains the Instrumentation Data Channel assignments.

## SECTION 2

### DATA SHEET NO. 1 TEST SUMMARY

#### TEST CONFIGURATION INFORMATION:

<b>Seating Position:</b>	P2	Right Front Seating Position
<b>Test:</b>	3.3.5.3	Roof Rail Mounted – Inboard facing SID IIs on Raised Seat
<b>Airbag: 1</b>	Curtain	Roof Rail Mounted – Passenger Side
<b>Airbag: 2</b>	Seat/Torso	Passenger Seat Mounted – Outside Seam
<b>Booster Block:</b>	N/A	N/A
<b>ATD Type/Serial No.:</b>	DG8012	SID IIs

<b>Number of Data Channels:</b>	18	
<b>Number of Cameras:</b>	0	<u>Real Time</u>
	3	<u>High Speed Digital</u>

#### PRE-TEST VISIBLE DUMMY CONTACT POINTS

<b>Head Contact:</b>	None
<b>Upper Torso Contact:</b>	Passenger Seat Back
<b>Lower Torso Contact:</b>	Passenger Door & Seat Back
<b>Knee Contact:</b>	Seat pan
<b>Foot Contact:</b>	Driver's Seat Pan

#### POST-TEST VISIBLE DUMMY CONTACT POINTS

<b>Head Contact:</b>	Curtain Airbag & Front Dash
<b>Upper Torso Contact:</b>	Torso/Pelvis Airbag
<b>Lower Torso Contact:</b>	Torso/Pelvis Airbag
<b>Knee Contact:</b>	Seat pan
<b>Foot Contact:</b>	Driver's Seat Pan

**DATA SHEET NO. 2  
VEHICLE PARAMETER DATA**

**TEST VEHICLE INFORMATION:**

Year/Make/Model/Body Style: 2019 Ford Edge SUV

NHTSA No. : M20190202TWG2 ; VIN: 2FMPK3G93KBB14053 Color: Brown

Engine Data: 14 cylinders; - CID; 2.0 Liters; - cc

Placement: - Longitudinal or In-Line; X Transverse or Lateral

Transmission Data: 8 speeds; - Manual; X Automatic; X Overdrive

Final Drive: - Rear Wheel Drive; X Front Wheel Drive; - Four Wheel Drive

Safety Belt Features – Driver X Pretensioner (Shoulder); X Load Limiter; X Adj. Anchorage

Safety Belt Features - Passenger X Pretensioner (Shoulder); X Load Limiter; X Adj. Anchorage

Major Options: X A/C; X Pwr. Steering.; X Pwr. Brakes

X Pwr. Windows; X Pwr. Door Locks; X Tilt Wheel

Date Received: 12/21/2018 ; Odometer Reading 119.4 Km

Selling Dealer: Summit Ford

& Address: 305 Grant Avenue, Auburn, NY 13021

**DATA FROM TIRE VEHICLE'S CERTIFICATION LABEL:**

Vehicle Manufactured by: Ford Motor Co

Date of Manufacture 10/18

GVWR: 2390 kg; GAWR: 1247 kg FRONT; 1145 kg REAR

**DATA FROM TIRE PLACARD:**

Recommended Tire Size: 245/60R18

\*Recommended Cold Tire Pressure: 240 kPa Front 240 kPa Rear

**DATA FROM TIRE SIDEWALL:**

Size of Tires on Test Vehicle: 245/60R18 ; Manufacturer: Michelin

Tire Pressure with Maximum Capacity Vehicle Load: Front 300 kPa Rear: 300 kPa

Treadwear: 440 ; Traction: A ; Temperature: A

**VEHICLE CAPACITY DATA:**

Type of Front Seats: - Bench; X Bucket; - Split Bench

Number of Occupants: 2 Front; 3 Rear; 5 Total

Vehicle Capacity Weight (VCW) = 430 Kg

No. of Occupants x 68.04 kg = 340.2 Kg

Rated Cargo/Luggage Weight (RCLW) = 89.8 Kg

\*Tire pressure used for test

‡Vehicle had previously undergone a New Car Assessment Program Side MDB NCAP Test.

**DATA SHEET NO. 3**  
**SID-IIs Dummy POSITIONING IN VEHICLE**

NHTSA No. M20190202TWG2

Measurement	Value
Total Fore/Aft Travel (mm)	255
Test Distance Rearward of Full-Forward (mm)	145
Total Fore/Aft Travel (Detents)	36 (0-35)
Placed in Position #	21

Seat Back Angle (headrest post)	SA ( -21.6° )	Value
Airbag Module Width	AMW (mm)	-
Airbag Width	ABW (mm)	-
Airbag Module Length	AML (mm)	-
Airbag Length	ABL (mm)	-
Top of Airbag Module to Head/Neck Junction	AN (mm)	243
Head CG to Door Panel/Side Window	HD (mm)	206
Head to Seat Back Centerline	HSC (mm)	289
Head to B-Pillar (cg)	HB (mm)	189
Head to Roof, Z (top of the head)	HZ (mm)	77
Head to Header	HHD (mm)	424
Chest to Dash	CD (mm)	534
Chest to Seatback	CS (mm)	240
Right Arm to Seat Back Centerline	RACL (mm)	-
Right Arm to Seat Back Centerline	RACL (deg)	-
Left Arm to Door Panel	LA (mm)	123
Knee to Knee	KK (mm)	165
Toe to Toe	TT (mm)	170
Right Knee to Seat Cushion Centerline	KSCR (mm)	-
Left Knee to Seat Cushion Centerline	KSCL (mm)	-
Right Toe to Seat Cushion Centerline	TSCR (mm)	-
Left Toe to Seat Cushion Centerline	TSCL (mm)	-



**DATA SHEET 4**  
**SID-IIs Dummy INJURY CRITERIA VALUES**

NHTSA No.: M20190202TWG2

Channel	Units	Max	Time (ms)	Min	Time (ms)
V1P2 Head x [CFC_1000]	g's	19.52	15.95	-7.64	29.20
V1P2 Head y [CFC_1000]	g's	20.57	18.20	-22.23	14.40
V1P2 Head z [CFC_1000]	g's	98.15	12.55	-11.80	20.75
V1P2 Headform Resultant [CFC_1000]	g's	98.17	12.55	0.01	-8.40
V1P2 Upper Neck Mocy [CFC_600]	Nm	22.59	19.00	-20.26	42.50
V1P2 Upper Neck Ntf [CFC_600]	-	0.09	129.70	0.00	-50.00
V1P2 Upper Neck Nte [CFC_600]	-	0.19	55.60	0.00	-50.00
V1P2 Upper Neck Ncf [CFC_600]	-	0.59	17.30	0.00	-50.00
V1P2 Upper Neck Nce [CFC_600]	-	0.47	39.00	0.00	-49.75
V1P2 Upper Neck Nij [CFC_600]	-	0.59	17.30	0.00	-28.80
V1P2 Upper Neck Fx [CFC_1000]	N	240.26	15.90	-196.26	34.20
V1P2 Upper neck Fy [CFC_1000]	N	456.10	47.40	-123.99	160.45
V1P2 Upper neck Fz [CFC_1000]	N	228.39	120.40	-1852.99	17.00
V1P2 Neck Force Resultant [CFC_1000]	N	1875.11	17.00	0.37	-22.90
V1P2 Upper Neck Mx [CFC_600]	Nm	18.31	72.70	-11.88	12.70
V1P2 Upper Neck My [CFC_600]	Nm	26.01	18.95	-22.58	41.20
V1P2 Upper Neck Mz [CFC_600]	Nm	8.34	26.75	-9.68	95.55
V1P2 Neck Moment Resultant [CFC_600]	Nm	27.50	21.40	0.00	-17.30
V1P2 Lower Neck Fx F [CFC_1000]	N	248.56	39.55	-281.13	22.45
V1P2 Lower Neck Fy F [CFC_1000]	N	394.49	13.55	-126.83	159.65
V1P2 Lower Neck Fz F [CFC_1000]	N	265.21	120.50	-1946.50	17.55
V1P2 Lower Neck Force Resultant [CFC_1000]	N	1953.82	17.55	0.53	-10.20
V1P2 Lower Neck Mx F [CFC_600]	Nm	54.83	51.65	-30.31	161.50
V1P2 Lower Neck My F [CFC_600]	Nm	81.50	16.35	-16.85	72.20
V1P2 Lower Neck Mz F [CFC_600]	Nm	14.54	13.55	-15.52	87.60
V1P2 Lower Neck Moment Resultant [CFC_600]	Nm	85.41	16.30	0.00	-36.10
Curtain Airbag Volts	V	16.11	0.30	-0.00	-25.55
Torso/Pelvis Airbag Volts	V	17.16	0.30	-0.40	25.80
Front Center Airbag Volts	V	N/A	N/A	N/A	N/A
Curtain Airbag Current	A	5.09	0.20	-0.02	102.10
Torso/Pelvis Airbag Current	A	7.64	2.25	-0.25	0.35
Front Center Airbag Current	A	N/A	N/A	N/A	N/A

**DATA SHEET 4**

**SID-IIs DUMMY INJURY CRITERIA VALUES (CONTINUED)**

VEHICLE: 2019 Ford Edge

NHTSA No.: M20190202TWG2

**HEAD INJURY CRITERIA (HIC)**

	HIC15			
	HIC(15)	t <sub>1</sub> (msec)	t <sub>2</sub> (msec)	Average Acceleration t <sub>1</sub> to t <sub>2</sub>
Position P2	28.72	12.35	14.55	44.75

**THORAX CRITERIA**

	Critical Values	Actual	Time(ms)
Maximum Deflection (mm)	N/A	N/A	N/A
Maximum Deflection Rate (m/s)	N/A	N/A	N/A

**Position P2 - Neck Injury Summary (SID-IIs – In Position)**

Nij V10	Nij	Time (ms)	Z Force (N)	X Force (N)	Y Moment (N-m)
Ntf	0.090	129.700	196.267	-27.534	5.579
Nte	0.188	55.600	-0.414	76.682	-10.116
Ncf	0.594	17.300	-1835.003	214.650	22.514
Nce	0.474	39.000	-601.784	-142.719	-22.162

**Peak Tension (CFC1000)**     228.391 N

**Peak Compression (CFC1000)** -1852.987 N

**Critical Values**

Nij Intercepts				Peak Limits	
Tension (CVt)	3880.00 N	Extension (mCVe)	61.00 N-m	Tension	2070.00 N
Compression (CVc)	3880.00 N	Flexion (mCVf)	155.00 N-m	Compression	2520.00 N

Appendix A  
PHOTOGRAPHS

## TABLE OF PHOTOGRAPHS

<u>Figure</u>	<u>Photograph Title</u>	<u>Page</u>
Figure A- 1	Right ¾ Front View of Vehicle, As Received	A- 3
Figure A- 2	Vehicle Certification Placard	A- 3
Figure A- 3	Pre-Test SID-IIs Left Side View	A- 4
Figure A- 4	Post-Test SID-IIs Left Side View	A- 4
Figure A- 5	Pre-Test SID-IIs Left Side Close-up View	A- 5
Figure A- 6	Post-Test SID-IIs Left Side Close-up View	A- 5
Figure A- 7	Pre-Test SID-IIs Front View	A- 6
Figure A- 8	Post-Test SID-IIs Front View	A- 6
Figure A- 9	Pre-Test SID-IIs Left ¾ Front View	A- 7
Figure A- 10	Post-Test SID-IIs Left ¾ Front View	A- 7
Figure A- 11	Pre-Test SID-IIs Right Side View	A- 8
Figure A- 12	Post-Test SID-IIs Right Side View	A- 8
Figure A- 13	Post-Test Curtain Airbag View	A- 9
Figure A- 14	Post-Test Seat Airbag View	A- 9
Figure A- 15	Impact Event	A- 10



**Figure A-1: Right ¾ Front View of Vehicle, As Received**



**Figure A-2: Vehicle Certification Placard**



**Figure A-3: Pre-Test SID-IIs Left Side View**



**Figure A-4: Post-Test SID-IIs Left Side View**



**Figure A-5: Pre-Test SID-IIs Left Side Close-up View**



**Figure A-6: Post-Test SID-IIs Left Side Close-up View**

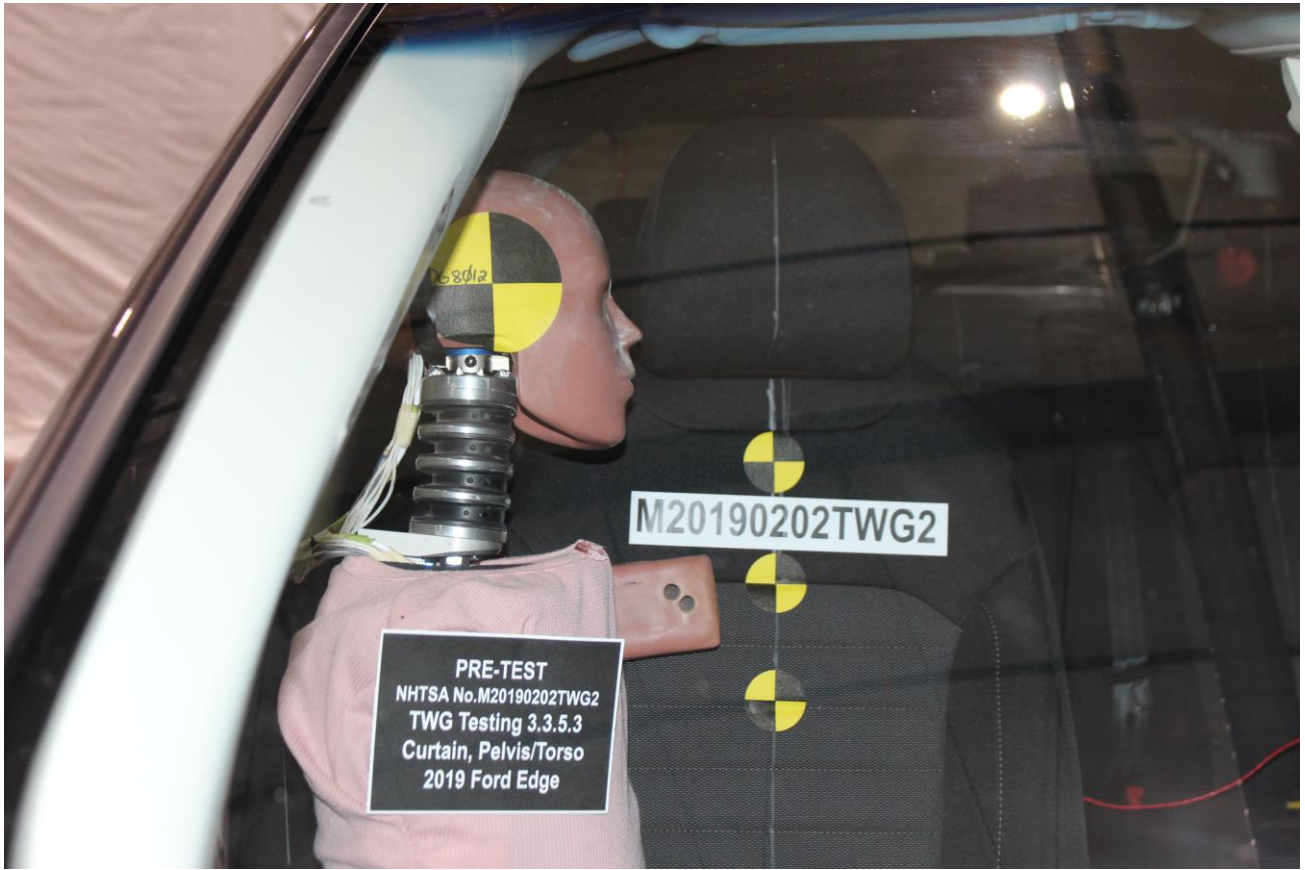


Figure A-7: Pre-Test SID-IIs Front View

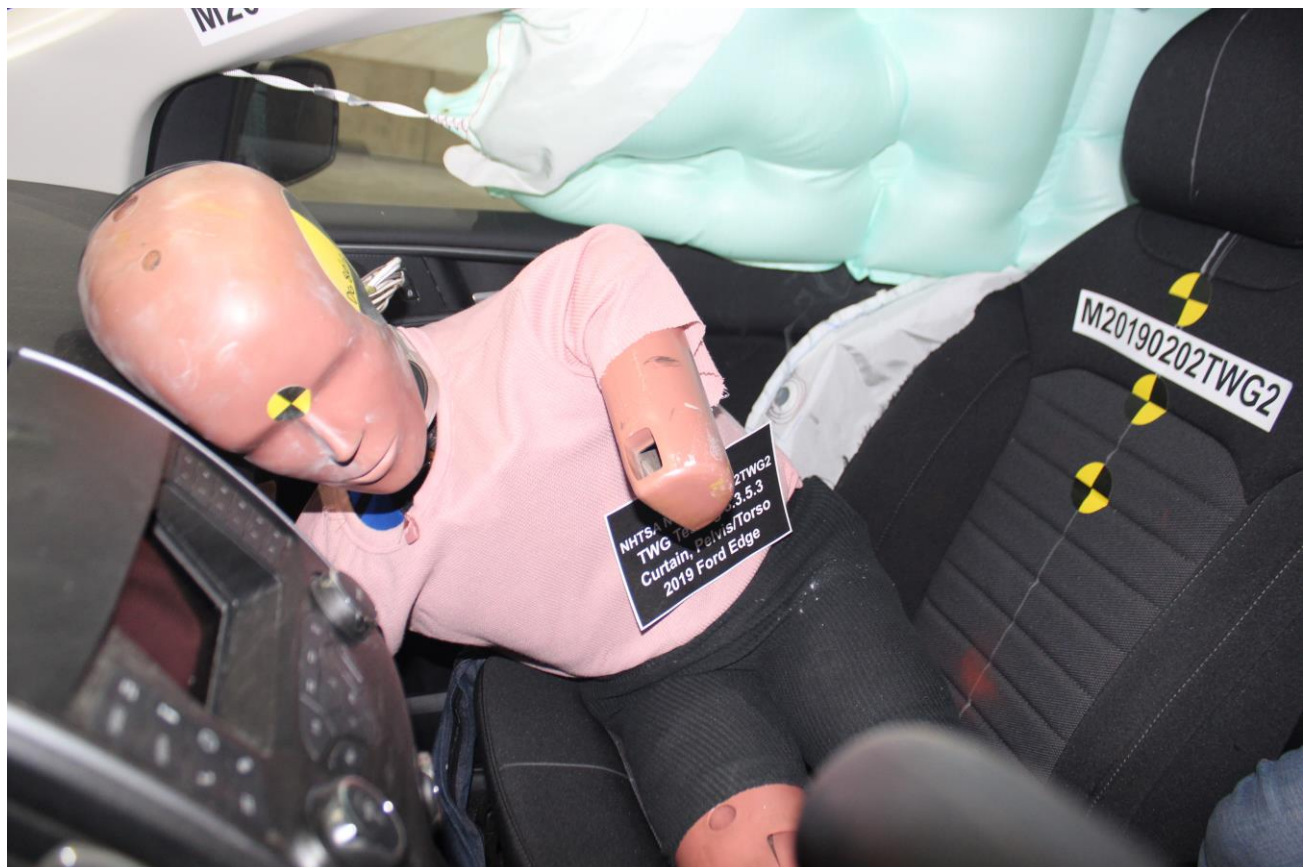


Figure A-8: Post-Test SID-IIs Front View





**Figure A-9: Pre-Test SID-IIs Left  $\frac{3}{4}$  Front View**



**Figure A-10: Post-Test SID-IIs Left  $\frac{3}{4}$  Front View**



PRE-TEST  
NHTSA No.M20190202TWG2  
TWG Testing 3.3.5.3  
Curtain, Pelvis/Torso  
2019 Ford Edge

**Figure A-11: Pre-Test SID-IIs Right Side View**



POST-TEST  
NHTSA No.M20190202TWG2  
TWG Testing 3.3.5.3  
Curtain, Pelvis/Torso  
2019 Ford Edge

**Figure A-12: Post-Test SID-IIs Right Side View**



**Figure A-13: Post-Test Curtain Airbag View**



**Figure A-14: Post-Test Seat Airbag View**




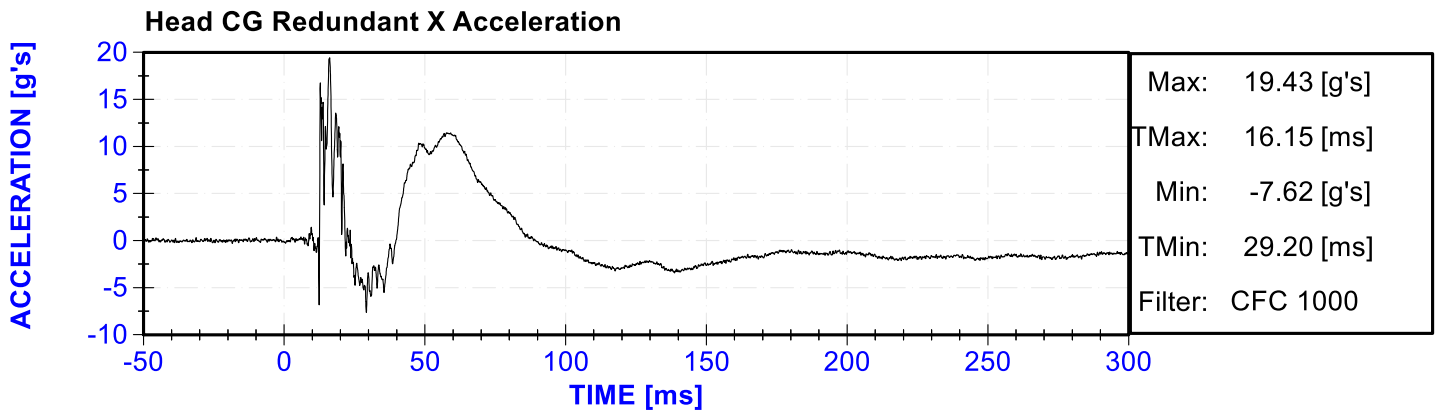






**Figure A-15: Impact Event**

**APPENDIX B**  
**VEHICLE & DUMMY RESPONSE DATA TRACES**





**Table of Data Plots**





No.	Description	Page
Plot 1	Head CG X Acceleration	B-3
Plot 2	Head CG Y Acceleration	B-3
Plot 3	Head CG Z Acceleration	B-3
Plot 4	Head CG Redundant X Acceleration	B-3
Plot 5	Head CG Redundant Y Acceleration	B-4
Plot 6	Head CG Redundant Z Acceleration	B-4
Plot 7	Head CG Acceleration Resultant	B-4
Plot 8	Upper Neck X Force	B-4
Plot 9	Upper Neck Y Force	B-5
Plot 10	Upper Neck Z Force	B-5
Plot 11	Upper Neck Force Resultant	B-5
Plot 12	Upper Neck X Moment	B-5
Plot 13	Upper Neck Y Moment	B-6
Plot 14	Upper Neck Z Moment	B-6
Plot 15	Upper Neck Moment Resultant	B-6
Plot 16	Lower Neck X Force	B-6
Plot 17	Lower Neck Y Force	B-7
Plot 18	Lower Neck Z Force	B-7
Plot 19	Lower Neck Force Resultant	B-7
Plot 20	Lower Neck X Moment	B-7
Plot 21	Lower Neck Y Moment	B-8
Plot 22	Lower Neck Z Moment	B-8
Plot 23	Lower Neck Moment Resultant	B-8
Plot 24	Total Moment about the OC	B-8
Plot 25	Neck Tension-Flexion Injury	B-9
Plot 26	Neck Tension-Extension Injury	B-9
Plot 27	Neck Compression-Flexion Injury	B-9
Plot 28	Neck Compression-Extension Injury	B-9
Plot 29	Total Neck Injury	B-10
Plot 30	Passenger Curtain Squib Current	B-10
Plot 31	Passenger Curtain Squib Voltage	B-10
Plot 32	Passenger Seat Squib Current	B-10
Plot 33	Passenger Seat Squib Voltage	B-11


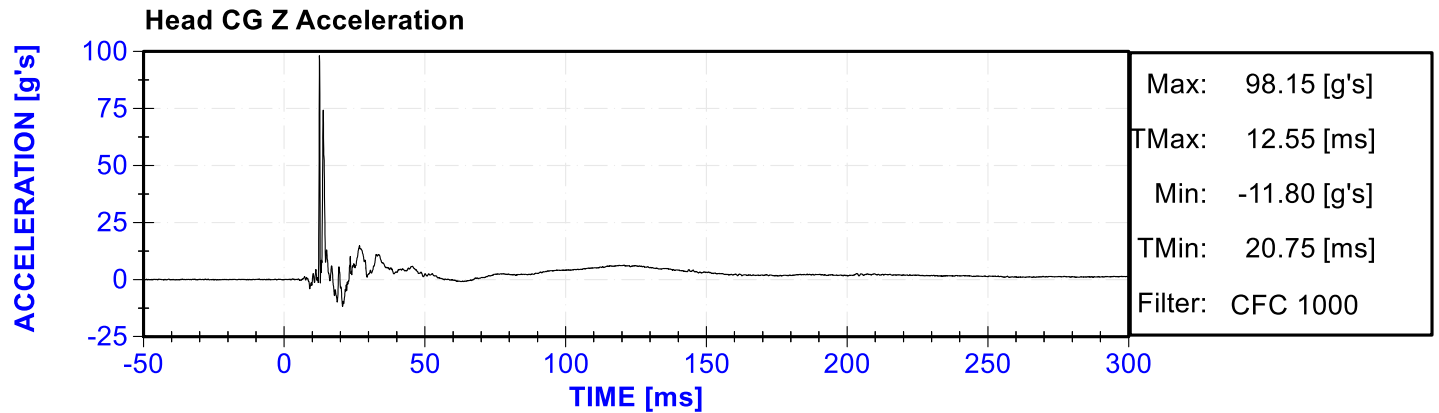
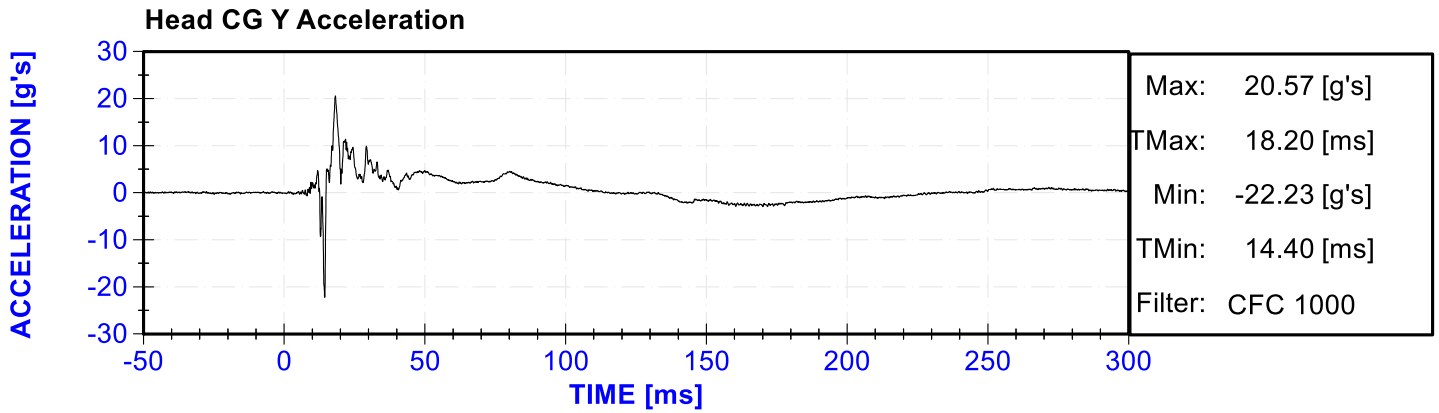
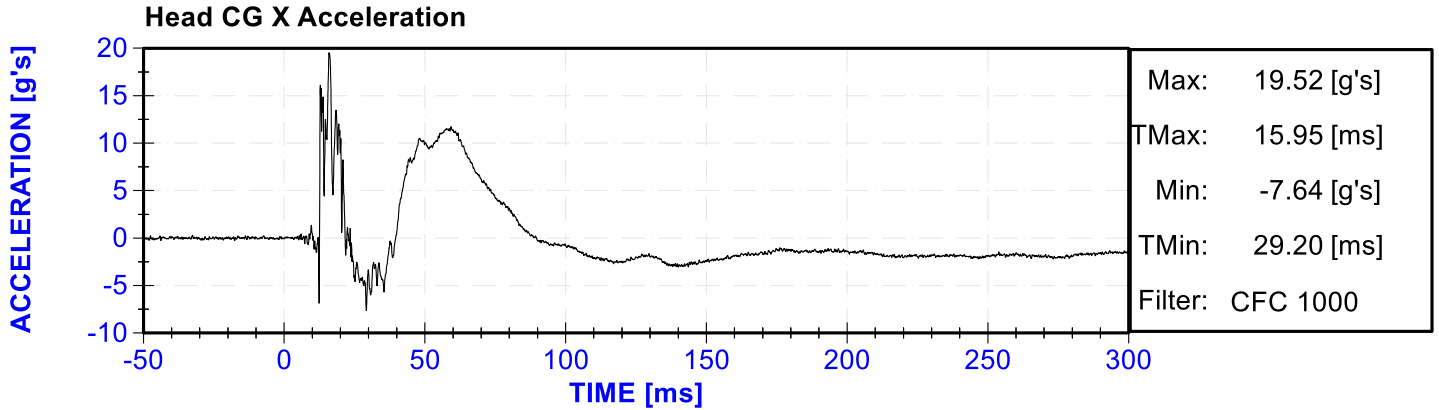


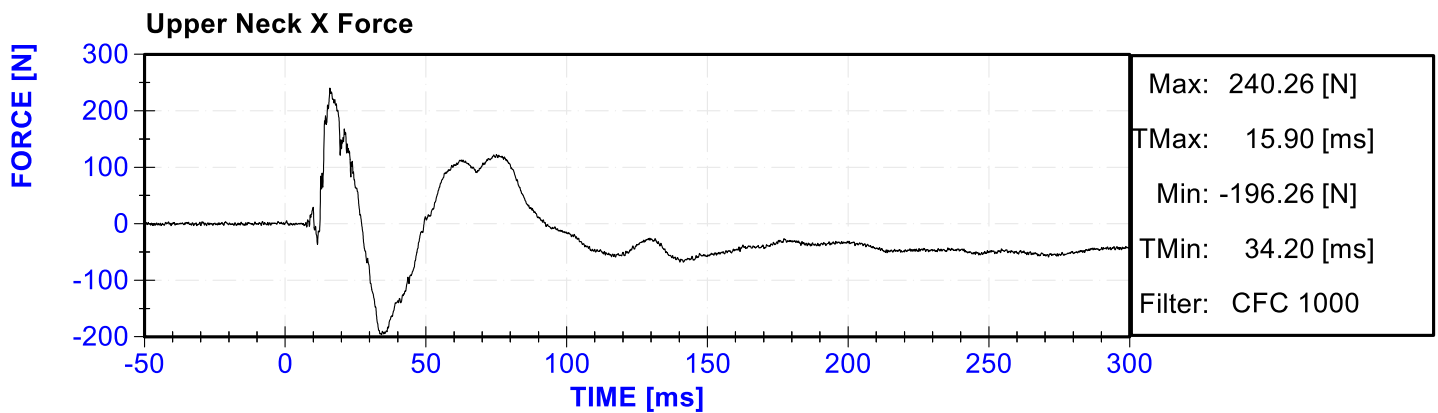
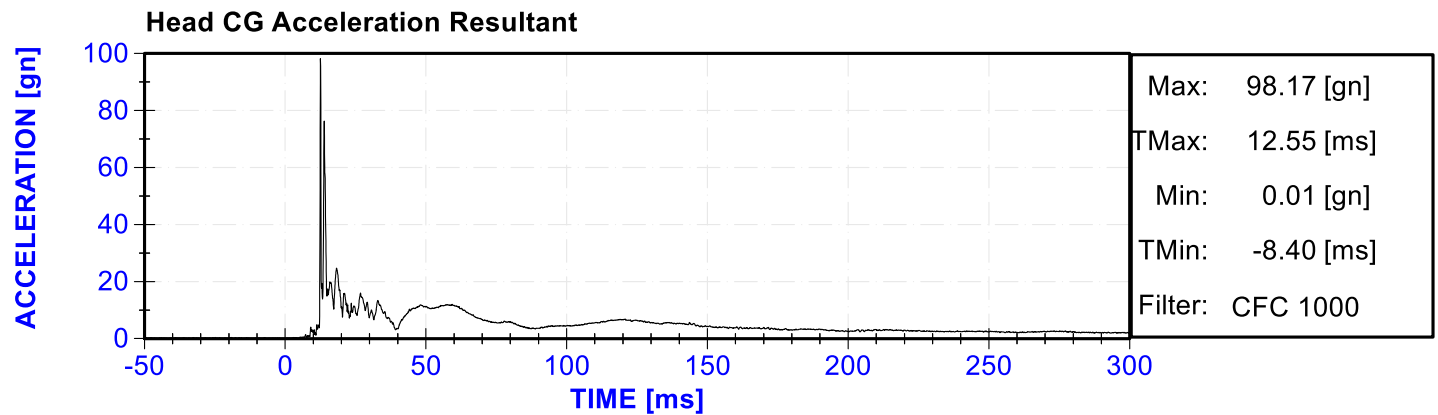
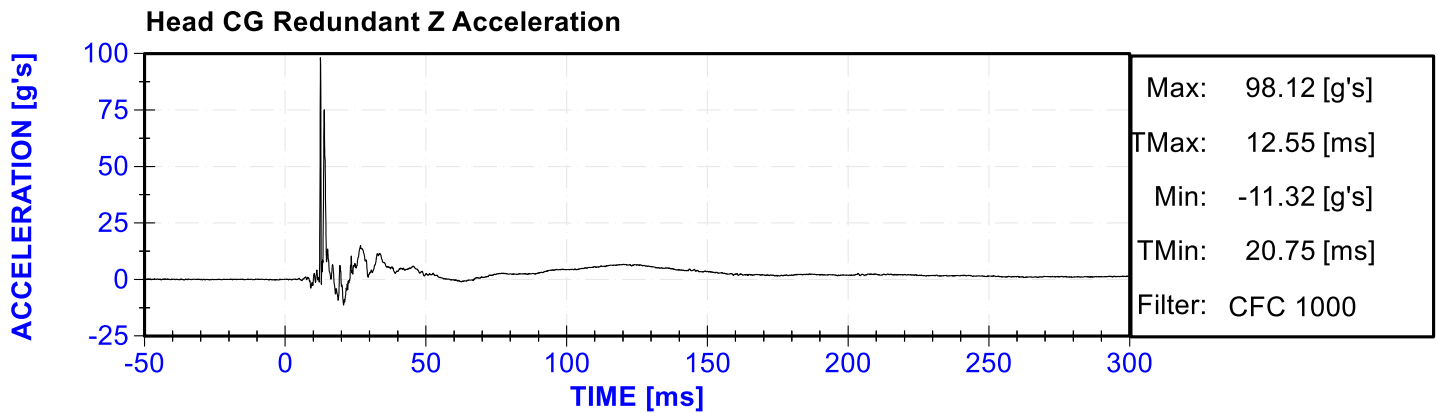
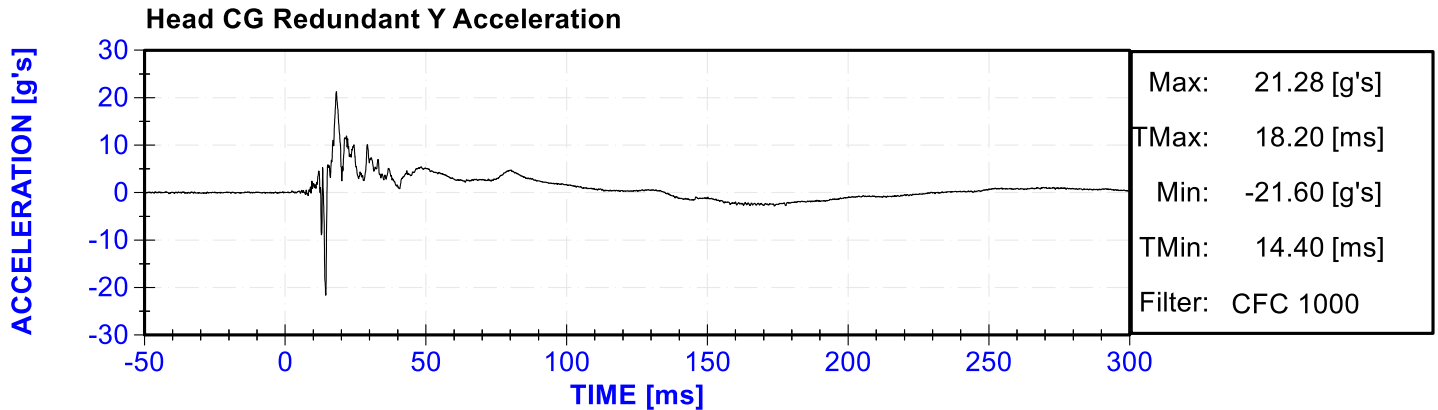








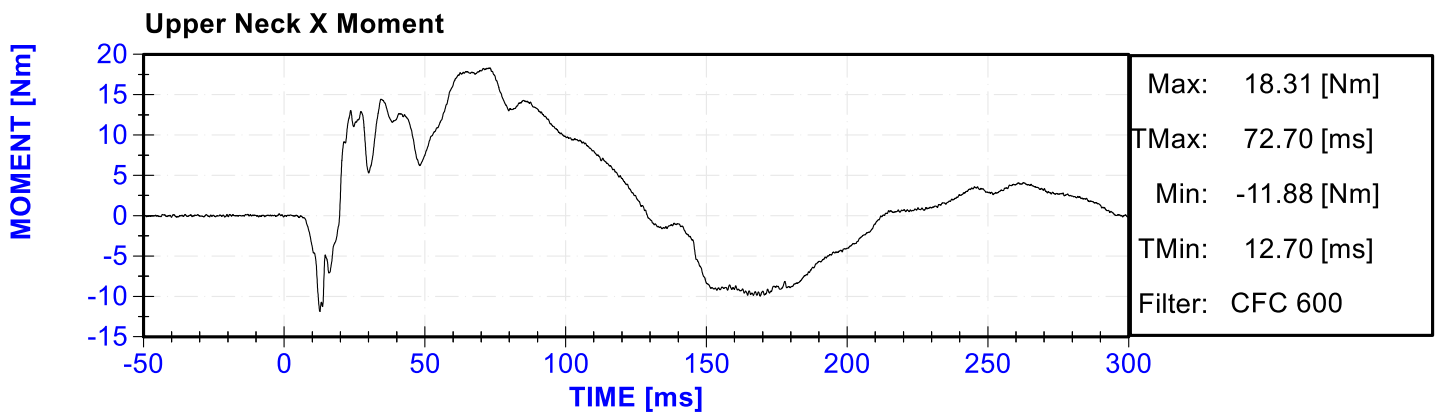
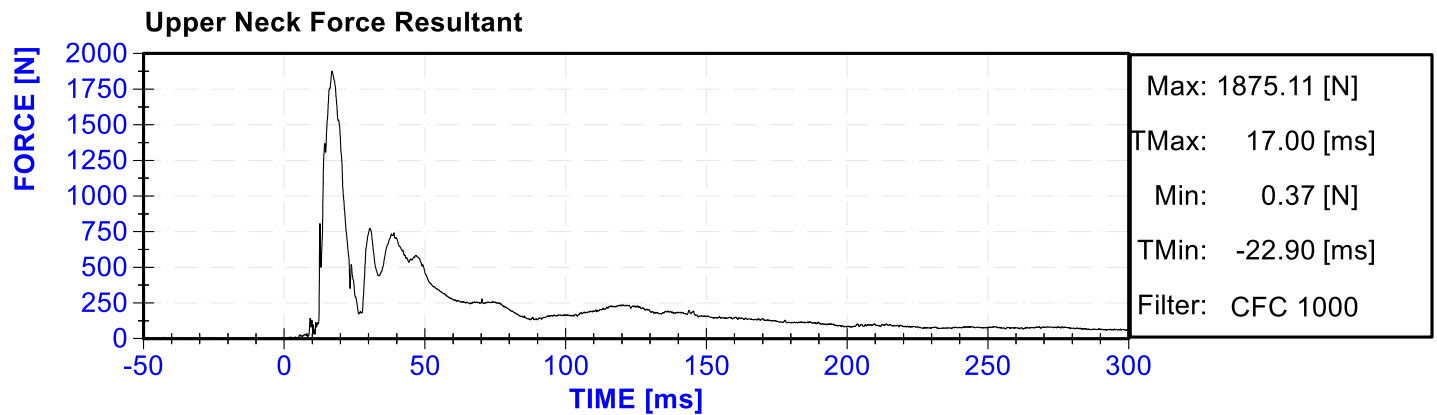
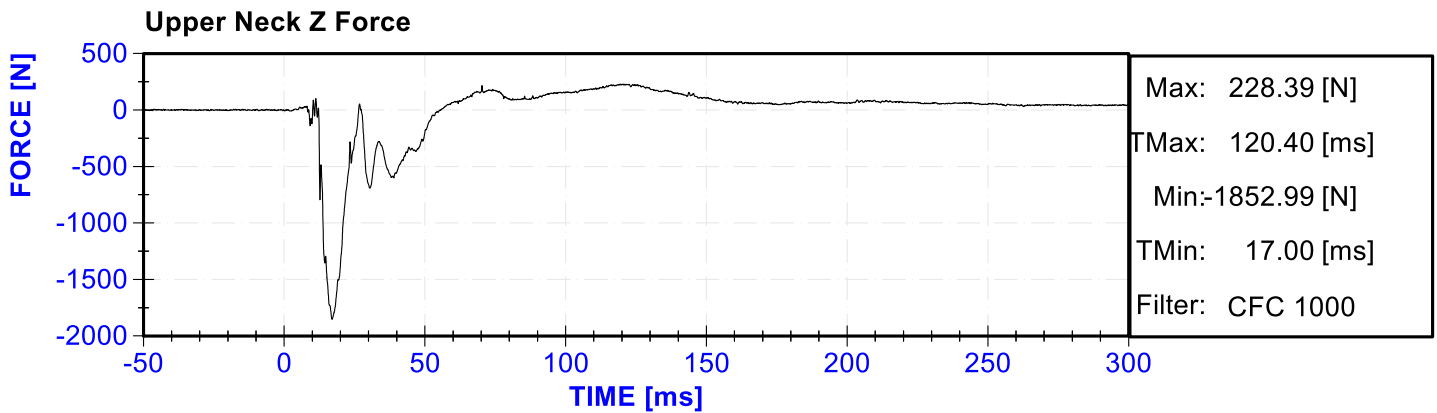
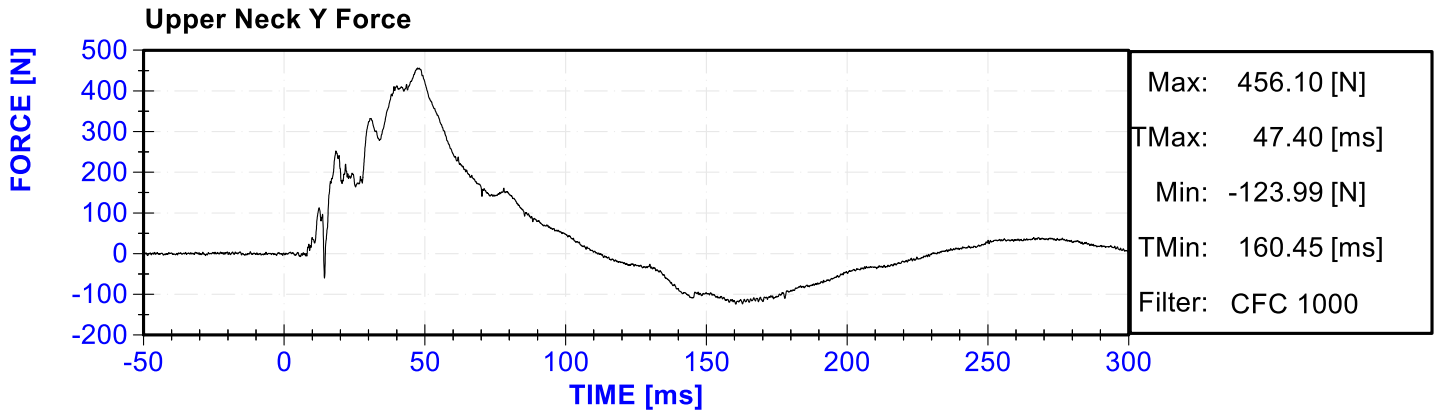


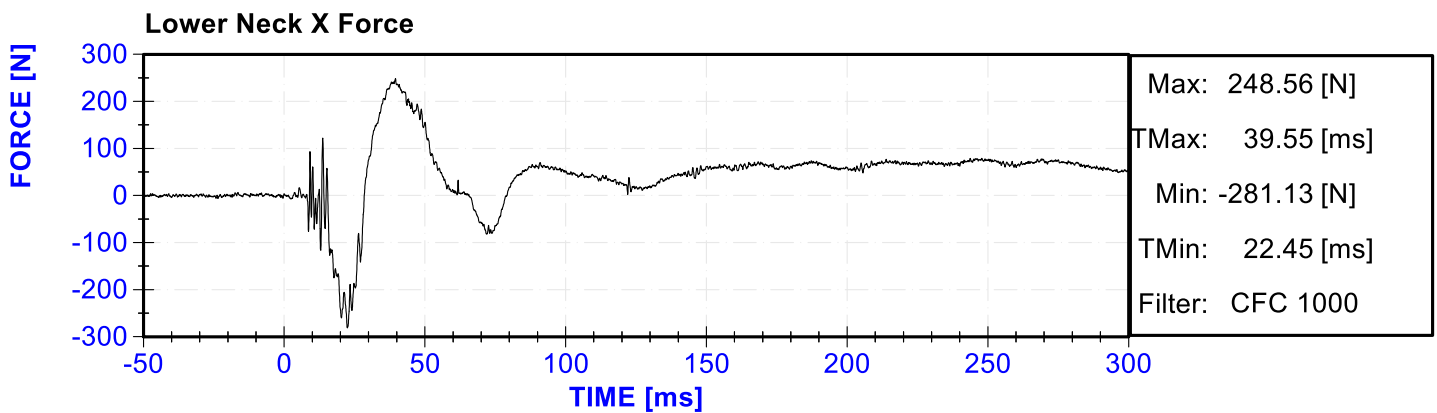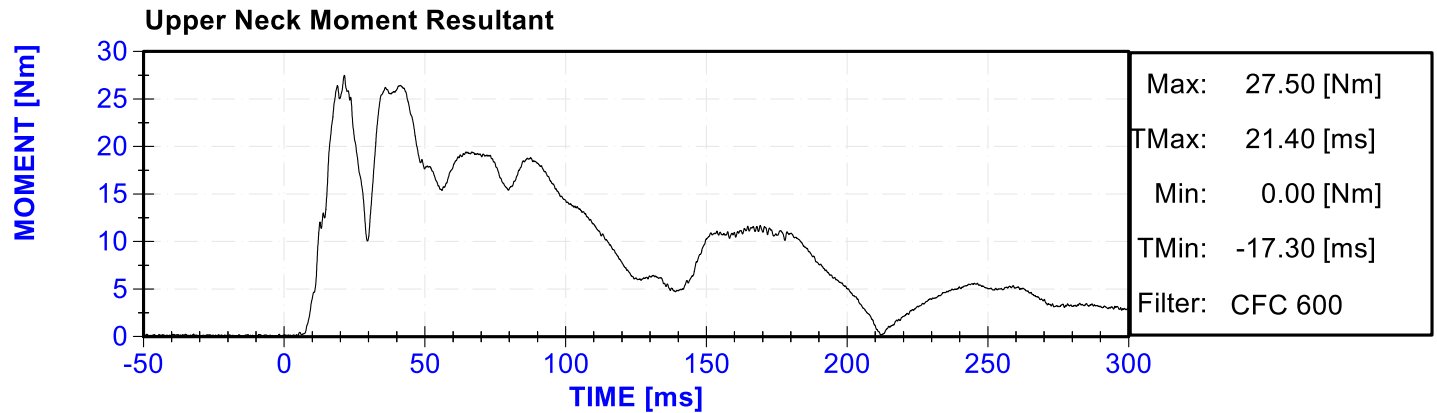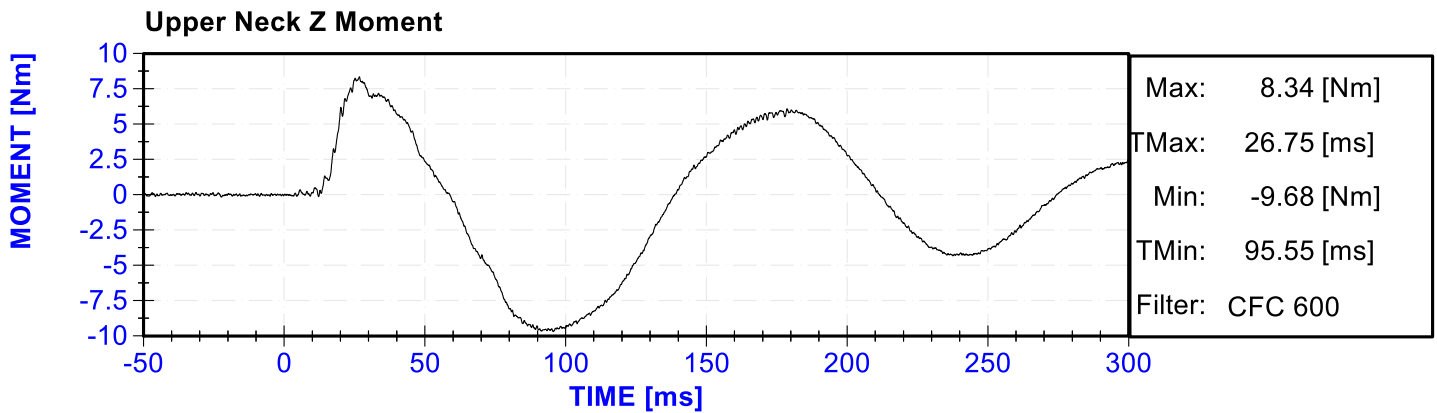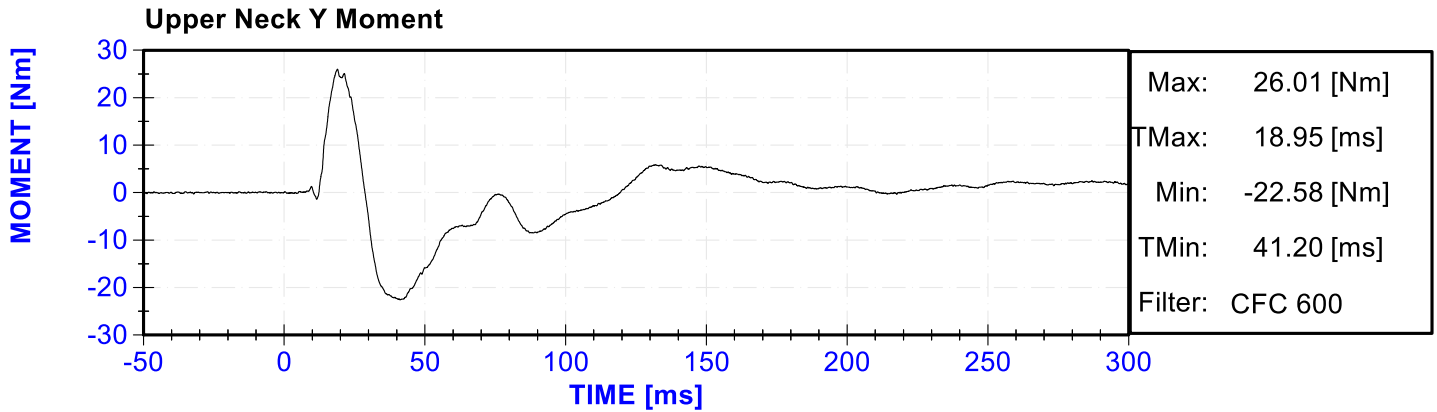


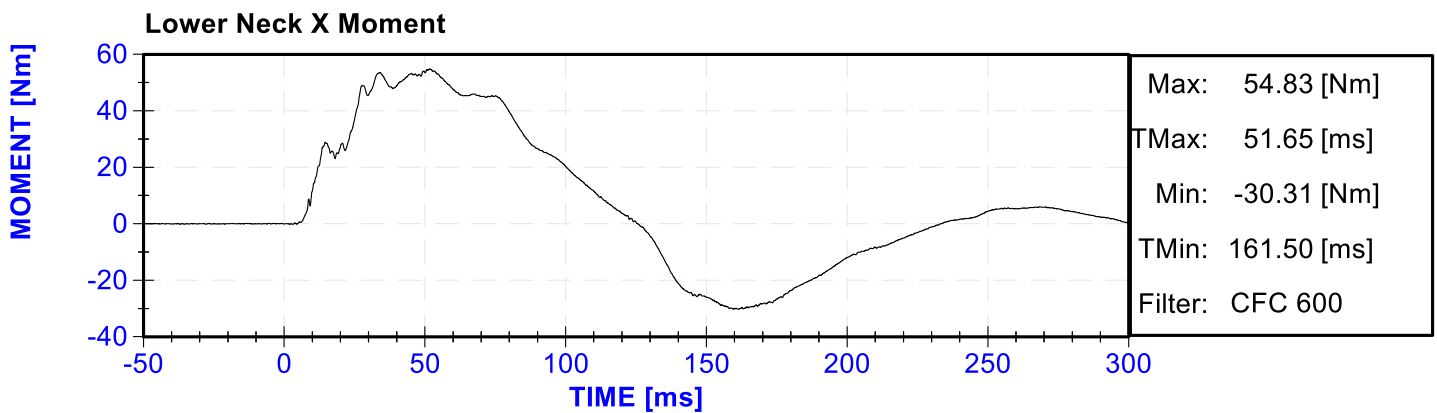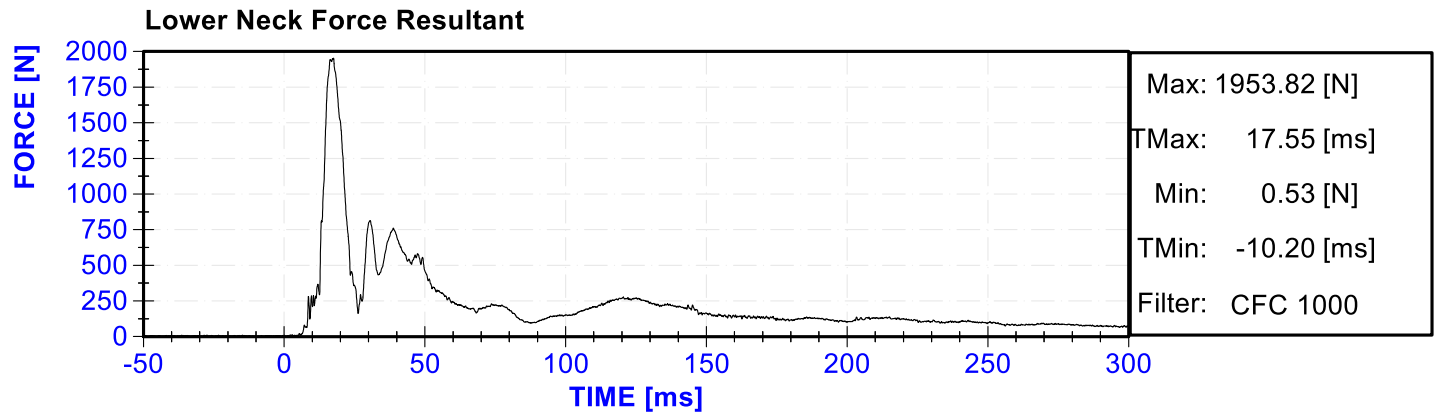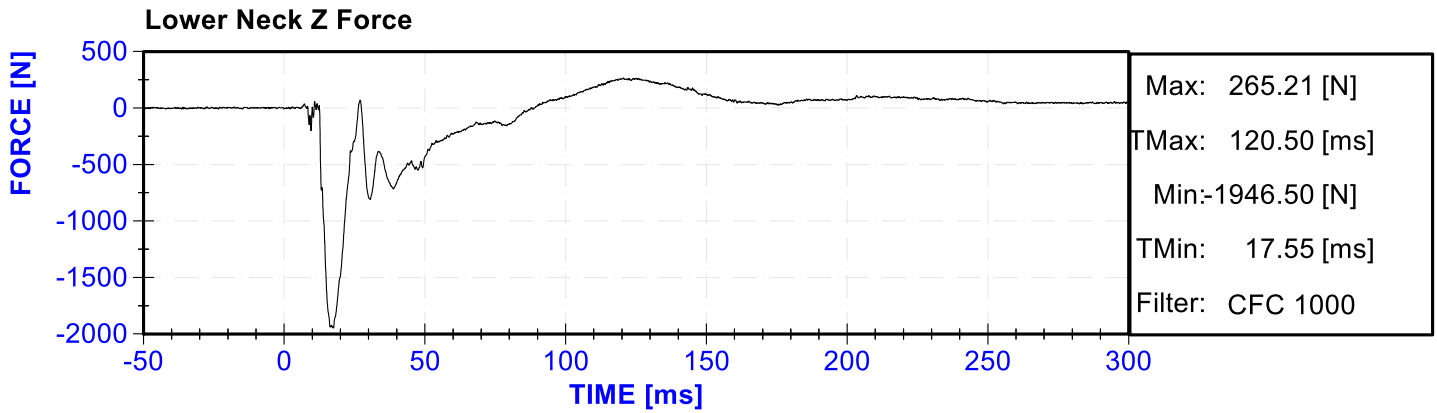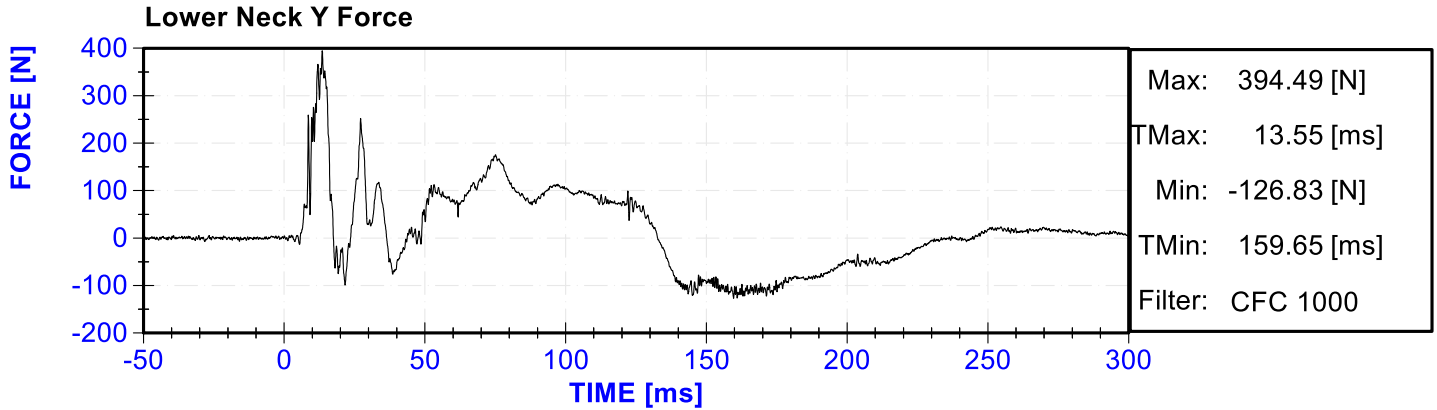

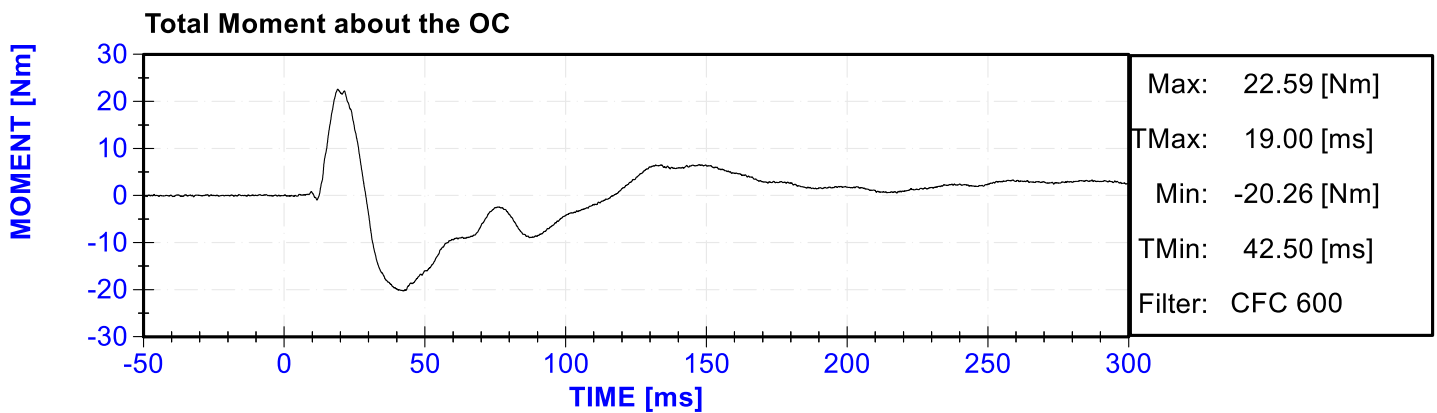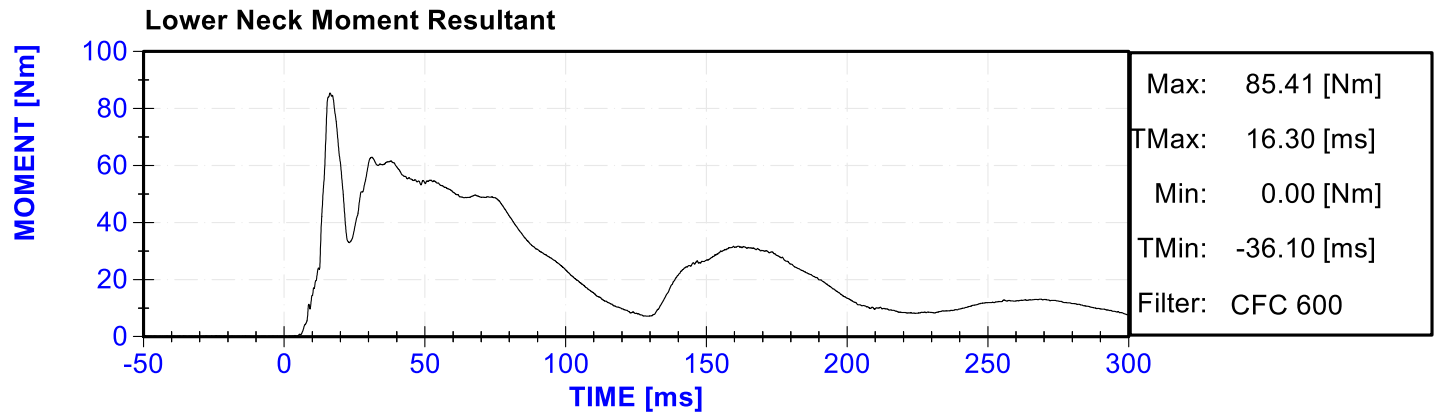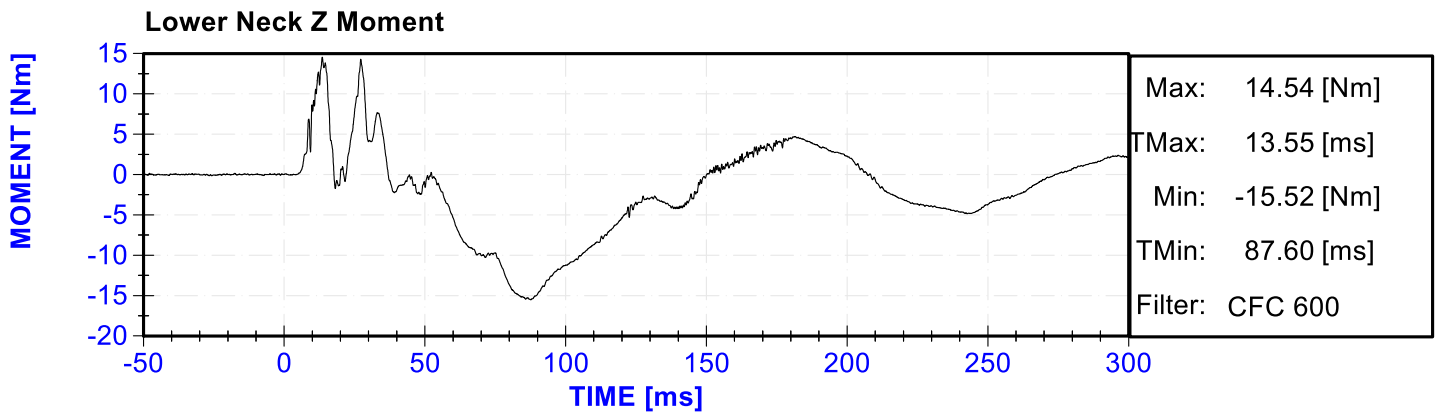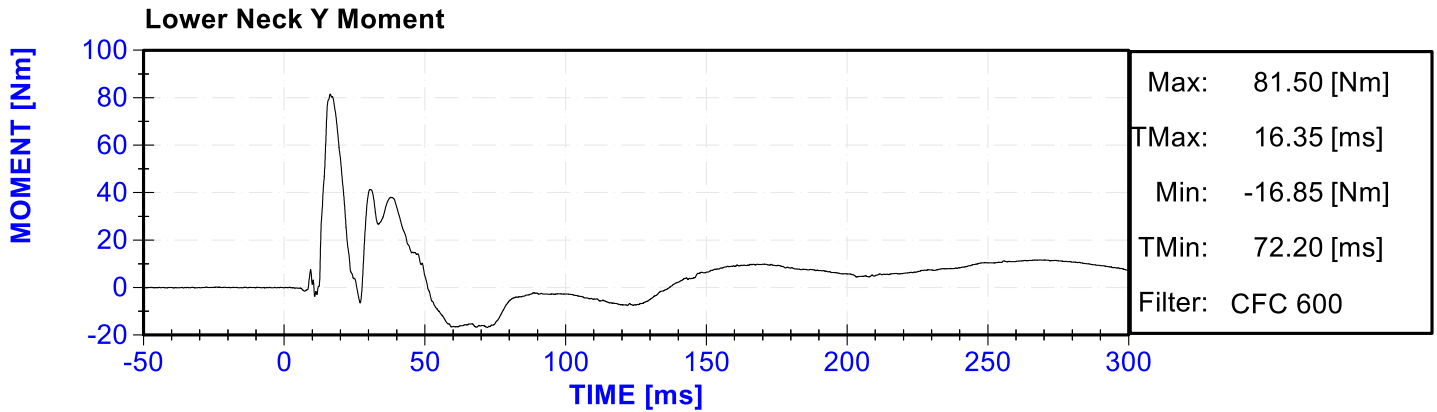

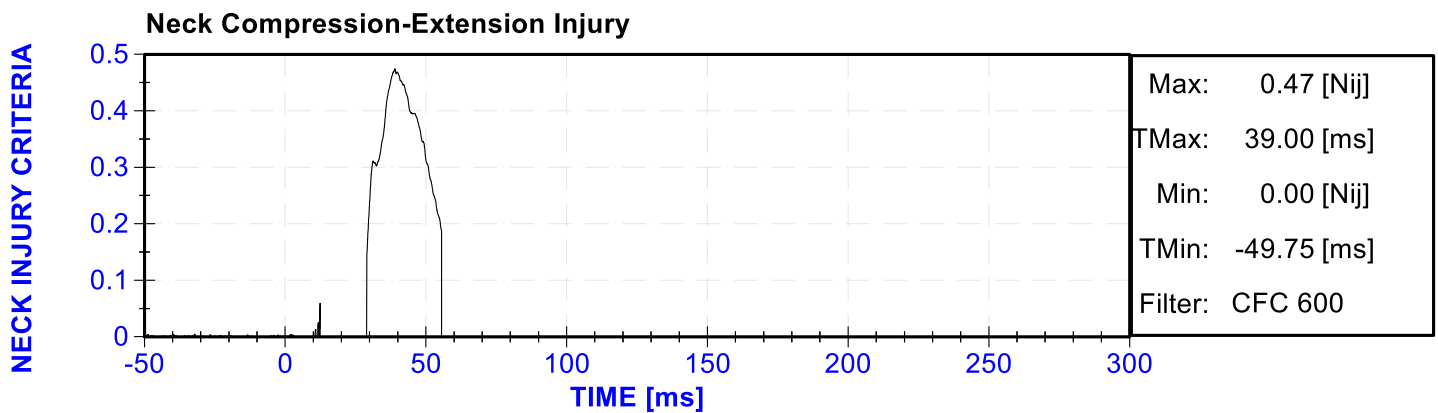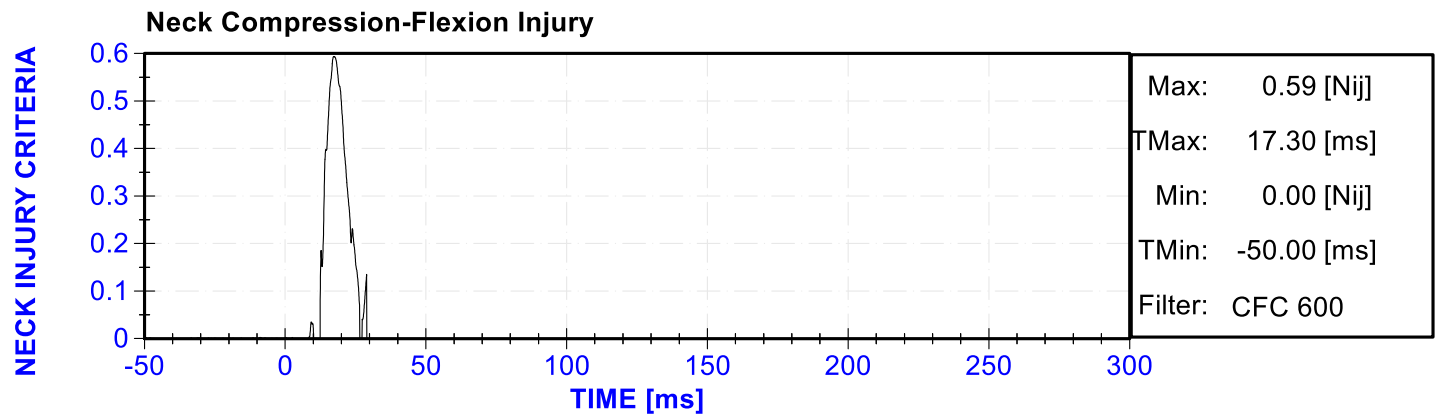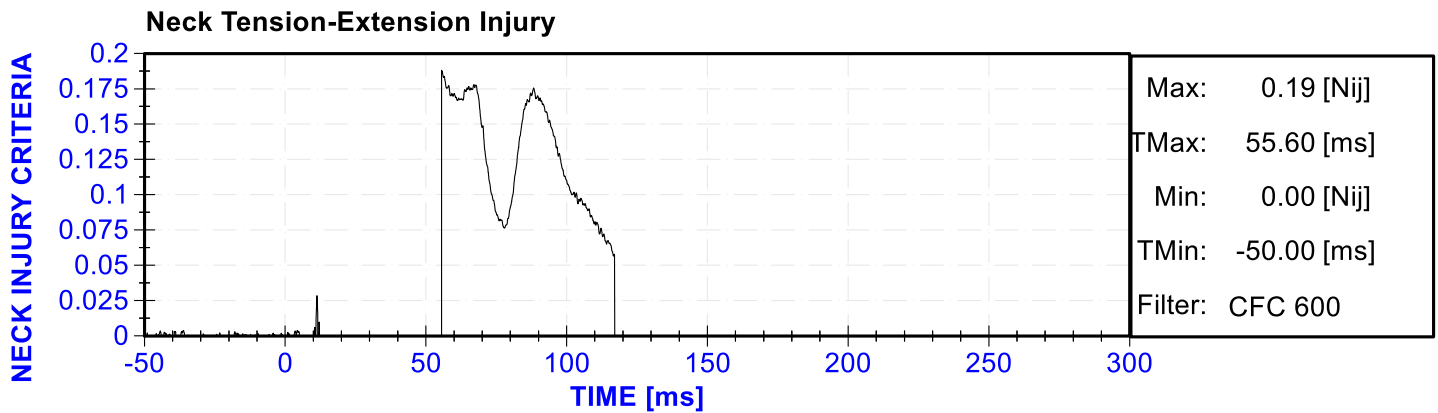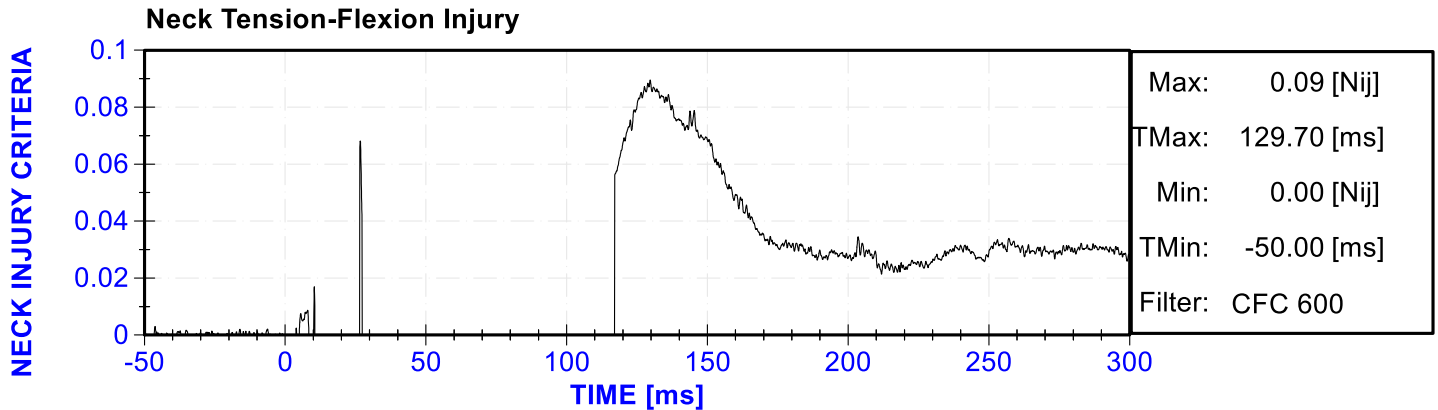

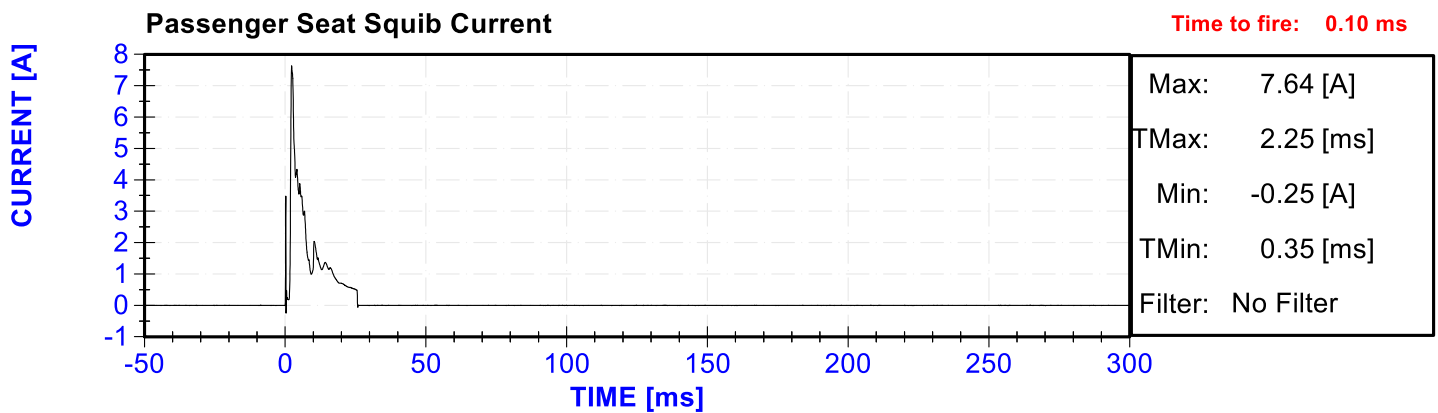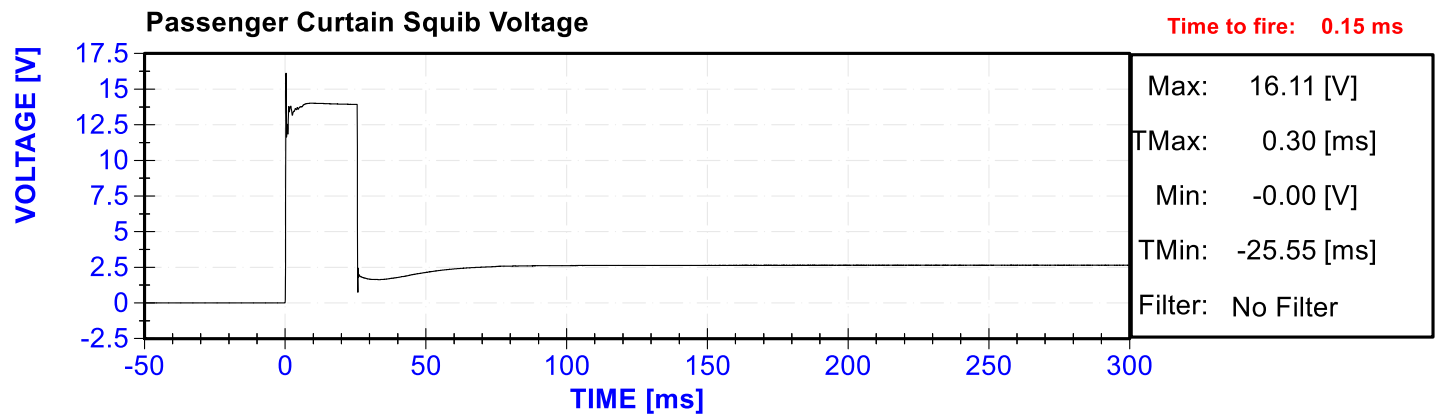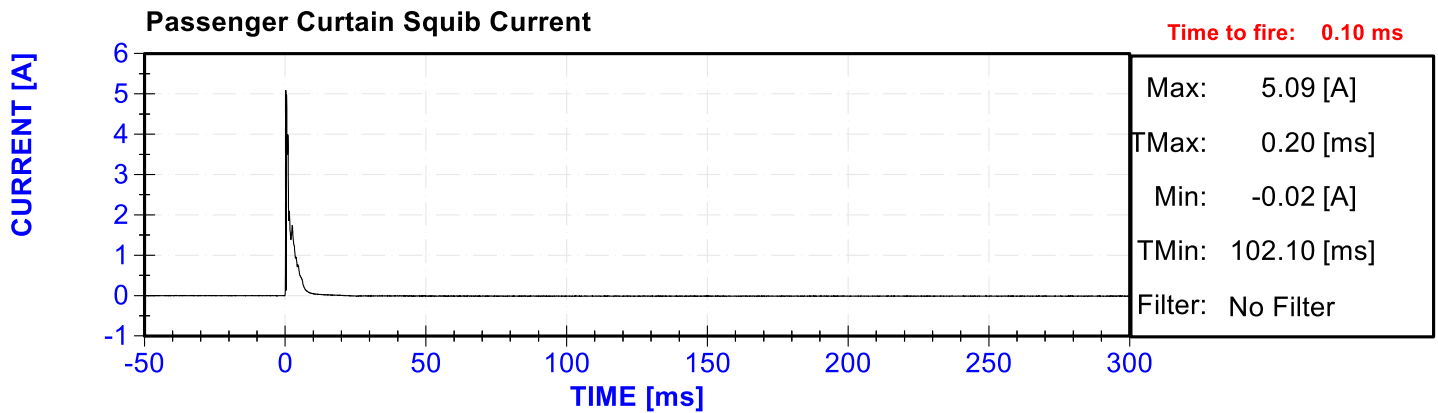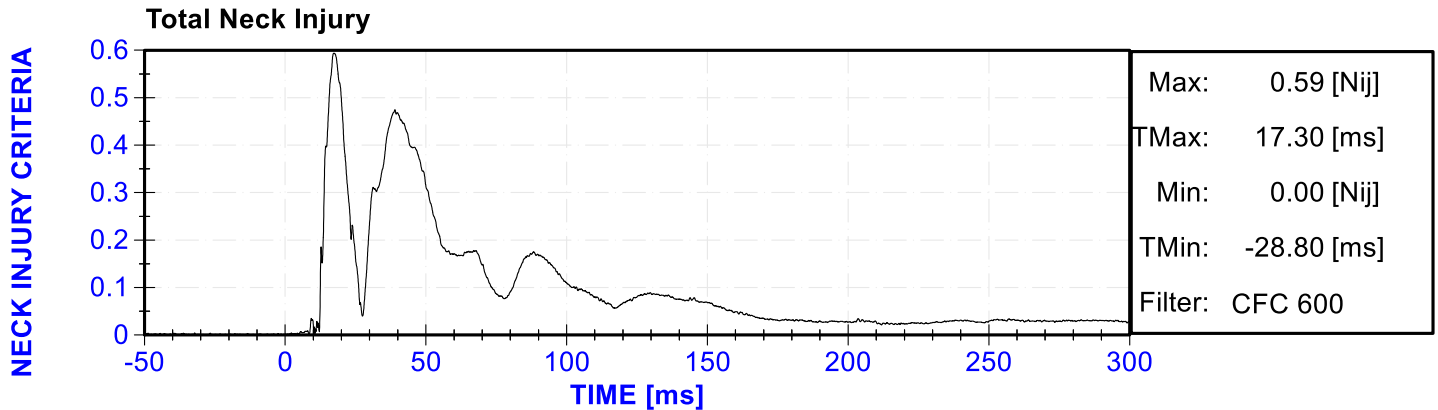

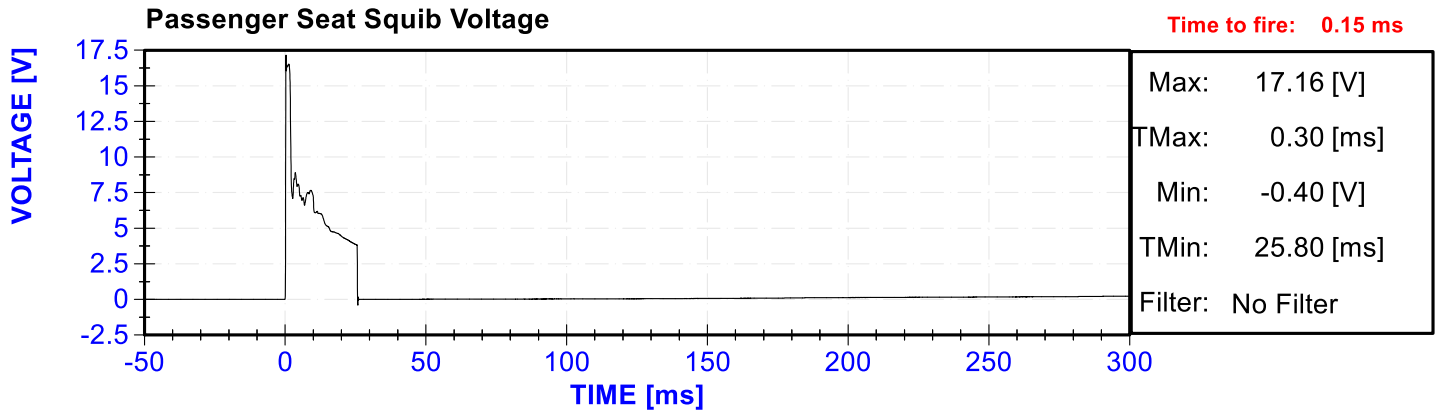

# APPENDIX C

## TEST EQUIPMENT LIST AND CALIBRATION INFORMATION



**TEST EQUIPMENT LIST AND CALIBRATION INFORMATION**

<b>POSITION 2 (Front Right Passenger) SERIAL NO.: DG8012 M20190202TWG2</b>			
	<b>SERIAL NUMBER</b>	<b>MANUFACTURER</b>	<b>CALIBRATION DATE</b>
Head X Acceleration	P74788	Endevco	4/11/2019
Head Y Acceleration	P83432	Endevco	4/11/2019
Head Z Acceleration	P83319	Endevco	4/11/2019
Head Redundant X Acceleration	P80334	Endevco	4/11/2019
Head Redundant Y Acceleration	P63841	Endevco	4/11/2019
Head Redundant Z Acceleration	P83322	Endevco	4/11/2019
Upper Neck X Force	2019-1716A-Fx	Denton	2/18/2019
Upper Neck Y Force	2019-1716A-Fy	Denton	2/18/2019
Upper Neck Z Force	2019-1716A-Fz	Denton	2/18/2019
Upper Neck X Moment	2019-1716A-Mx	Denton	2/18/2019
Upper Neck Y Moment	2019-1716A-My	Denton	2/18/2019
Upper Neck Z Moment	2019-1716A-Mz	Denton	2/18/2019
Lower Neck X Force	153-3166JTF-Fx	Humanetics	8/22/2018
Lower Neck Y Force	153-3166JTF-Fy	Humanetics	8/22/2018
Lower Neck Z Force	153-3166JTF-Fz	Humanetics	8/22/2018
Lower Neck X Moment	153-3166JTF-Mx	Humanetics	8/22/2018
Lower Neck Y Moment	153-3166JTF-My	Humanetics	8/22/2018
Lower Neck Z Moment	153-3166JTF-Mz	Humanetics	8/22/2018
Curtain Bag Voltage	ABT squib volts	AutoLab System	-
Curtain Bag Current	ABT squib amps	AutoLab System	-
Seat/Torso Bag Voltage	ABT squib volts	AutoLab System	-
Seat/Torso Bag Current	ABT squib amps	AutoLab System	-