

**REPORT NUMBER: NCAP-MGA-21-007**

**NEW CAR ASSESSMENT PROGRAM (NCAP)  
Frontal Barrier Impact Test**

**GM KOREA COMPANY  
2021 Chevrolet Trailblazer AWD LT 5-Door SUV  
NHTSA No.: O20210100**

**MGA RESEARCH CORPORATION  
5000 Warren Road  
Burlington, WI 53105**



**Test Date: October 26, 2020**


**Final Report Date: December 7, 2020**


**FINAL REPORT**

**U.S. DEPARTMENT OF TRANSPORTATION  
National Highway Traffic Safety Administration  
Office of Crashworthiness Standards  
1200 New Jersey Ave, SE  
Room W43-410  
Washington, DC 20590**

This publication is distributed by the U.S. Department of Transportation, National Highway Traffic Safety Administration, in the interest of information exchange. The opinions, findings and conclusions expressed in this publication are those of the author(s) and not necessarily those of the Department of Transportation or the National Highway Traffic Safety Administration. The United States Government assumes no liability for its contents or use thereof.

If trade or manufacturers' names or products are mentioned, it is only because they are considered essential to the object of the publication and should not be construed as an endorsement. The United States Government does not endorse products or manufacturers.

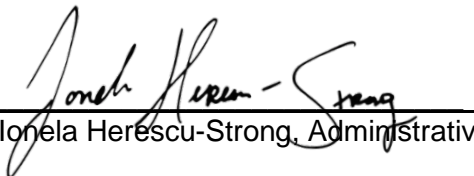Prepared by:   
Ionela Herescu-Strong, Administrative Assistant

Approved by:   
Ben Fischer, Program Manager

Approval Date: December 7, 2020

FINAL REPORT ACCEPTANCE BY OCWS:

\_\_\_\_\_  
Division Chief, New Car Assessment Program  
NHTSA, Office of Crashworthiness Standards

Date: \_\_\_\_\_

\_\_\_\_\_  
COTR, New Car Assessment Program  
NHTSA, Office of Crashworthiness Standards

Date: \_\_\_\_\_

## TECHNICAL REPORT DOCUMENTATION PAGE

<b>1. Report No.</b> NCAP-MGA-21-007	<b>2. Government Accession No.</b>	<b>3. Recipient's Catalog No.</b>																																																							
<b>4. Title and Subtitle</b> Final Report of New Car Assessment Program Frontal Impact Testing of a 2021 Chevrolet Trailblazer AWD LT 5-Door SUV, NHTSA No.: O20210100		<b>5. Report Date</b> December 7, 2020																																																							
		<b>6. Performing Organization Code</b> MGA																																																							
<b>7. Author(s)</b> Ionela Herescu-Strong, Administrative Assistant Ben Fischer, Program Manager		<b>8. Performing Organization Report No.</b> NCAP-MGA-21-007																																																							
<b>9. Performing Organization Name and Address</b> MGA Research Corporation 5000 Warren Road Burlington, WI 53105		<b>10. Work Unit No.</b>																																																							
		<b>11. Contract or Grant No.</b> 693JJ919D000006																																																							
<b>12. Sponsoring Agency Name and Address</b> U.S. Department of Transportation National Highway Traffic Safety Administration Office of Crashworthiness Standards (NRM-110) 1200 New Jersey Ave, SE, Room W43-410 Washington, D.C. 20590		<b>13. Type of Report and Period Covered</b> Final Test Report October 26, 2020 to December 7, 2020																																																							
		<b>14. Sponsoring Agency Code</b> NRM-110																																																							
<b>15. Supplementary Notes</b>																																																									
<b>16. Abstract</b> A 56.3 km/h NCAP Frontal Rigid Barrier Impact Test was conducted on a 2021 Chevrolet Trailblazer AWD LT 5-Door SUV in accordance with the specifications of the Office of Crashworthiness Standards Laboratory Procedure for NCAP Full Frontal Rigid Barrier Impact Testing. This test was conducted to obtain data indicant of FMVSS 208, 212, 219 (partial), and 301 performance. The test was conducted at MGA Research Corporation in Burlington, Wisconsin on October 26, 2020.  The impact velocity of the vehicle was 56.20 km/h and the ambient temperature at the barrier face at the time of impact was 21.7°C. The target vehicle post-test maximum crush was 537 mm located to the left of vehicle centerline. The test vehicle's performance was as follows:																																																									
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th rowspan="2">Measurement Description</th> <th rowspan="2">Units</th> <th colspan="2">Driver ATD</th> <th colspan="2">Passenger ATD</th> </tr> <tr> <th>Threshold</th> <th>Result</th> <th>Threshold</th> <th>Result</th> </tr> </thead> <tbody> <tr> <td>Head Injury Criteria (HIC<sub>15</sub>)</td> <td></td> <td>700</td> <td>185</td> <td>700</td> <td>401</td> </tr> <tr> <td>Maximum Chest Compression</td> <td>mm</td> <td>63</td> <td>21</td> <td>52</td> <td>10</td> </tr> <tr> <td>Nij</td> <td></td> <td>1</td> <td>0.24</td> <td>1</td> <td>0.29</td> </tr> <tr> <td>Neck Tension</td> <td>N</td> <td>4170</td> <td>846</td> <td>2620</td> <td>682</td> </tr> <tr> <td>Neck Compression</td> <td>N</td> <td>4000</td> <td>67</td> <td>2520</td> <td>363</td> </tr> <tr> <td>Left Femur Force</td> <td>N</td> <td>10008</td> <td>370</td> <td>6805</td> <td>1820</td> </tr> <tr> <td>Right Femur Force</td> <td>N</td> <td>10008</td> <td>1161</td> <td>6805</td> <td>1705</td> </tr> </tbody> </table>						Measurement Description	Units	Driver ATD		Passenger ATD		Threshold	Result	Threshold	Result	Head Injury Criteria (HIC <sub>15</sub> )		700	185	700	401	Maximum Chest Compression	mm	63	21	52	10	Nij		1	0.24	1	0.29	Neck Tension	N	4170	846	2620	682	Neck Compression	N	4000	67	2520	363	Left Femur Force	N	10008	370	6805	1820	Right Femur Force	N	10008	1161	6805	1705
Measurement Description	Units	Driver ATD		Passenger ATD																																																					
		Threshold	Result	Threshold	Result																																																				
Head Injury Criteria (HIC <sub>15</sub> )		700	185	700	401																																																				
Maximum Chest Compression	mm	63	21	52	10																																																				
Nij		1	0.24	1	0.29																																																				
Neck Tension	N	4170	846	2620	682																																																				
Neck Compression	N	4000	67	2520	363																																																				
Left Femur Force	N	10008	370	6805	1820																																																				
Right Femur Force	N	10008	1161	6805	1705																																																				
<b>17. Key Words</b>  35 mph Frontal Barrier Impact Test New Car Assessment Program (NCAP)			<b>18. Distribution Statement</b> Copies of this report are available from: National Highway Traffic Safety Administration Technical Information Services Division 1200 New Jersey Ave, SE Washington, DC 20590																																																						
<b>19. Security Classification of Report</b> Unclassified	<b>20. Security Classification of Page</b> Unclassified	<b>21. No. of Pages</b> 178	<b>22. Price</b>																																																						

## TABLE OF CONTENTS

<u>Section</u>		<u>Page No.</u>
1	Purpose and Summary of Test	1
2	Occupant and Vehicle Information / Data Sheets	3
<u>Data Sheet No.</u>		<u>Page No.</u>
1	General Test and Vehicle Parameter Data	4
2	Seat Adjustment, Fuel System, and Steering Wheel Data	8
3	Dummy Longitudinal Clearance Dimensions	10
4	Dummy Lateral Clearance Dimensions	11
5	Seat Belt Positioning Data	12
6	High-Speed Camera Locations and Data	13
7	Vehicle Accelerometer Locations	15
8	Photographic Reference Target Locations	16
9	Load Cell Locations on Fixed Barrier	17
10	Test Vehicle Summary of Results	18
11	Post-Test Observations	19
12	Vehicle Profile Measurements	20
13	Accident Investigation Division Data	22
14	Vehicle Intrusion Measurements	23
15	Summary of Indicant FMVSS No. 212 and FMVSS No. 219 (Partial) Data	25
16	FMVSS No. 301 Barrier Impact and Static Rollover Results	26
17	Dummy/Vehicle Temperature Stabilization Data	28
<u>Appendix</u>		
A	Photographs	A
B	Dummy Response Data Traces	B
C	Dummy Qualification and Performance Verification Data	C
D	Test Equipment and Instrumentation Qualification Data	D

## **SECTION 1 PURPOSE AND SUMMARY OF TEST**

### **PURPOSE**

This 56.3 km/h frontal barrier impact test is part of the Vehicle Barrier Impact Testing Program sponsored by the National Highway Traffic Safety Administration (NHTSA) under contract number 693JJ919D000006. The purpose of this test was to obtain vehicle crashworthiness and occupant restraint system performance data for consumer information purposes.

The 56.3 km/h frontal barrier impact was conducted in accordance with the Office of Crashworthiness Standards Laboratory Procedure for NCAP Full Frontal Rigid Barrier Impact Testing.

### **SUMMARY**

A load cell barrier consisting of 176 load cells was impacted by a 2021 Chevrolet Trailblazer AWD LT 5-Door SUV at a velocity of 56.20 km/h. The test was performed at MGA Research Corporation on October 26, 2020. Pre-test and post-test photographs of the vehicle and dummies can be found in Appendix A.

Two (2) real-time cameras and sixteen (16) high-speed cameras were used to document the frontal barrier impact event. Camera locations and other pertinent camera information can be found in this report.

One Part 572E 50<sup>th</sup> percentile male anthropomorphic test device (ATD), was placed in the driver seating position and one Part 572O 5<sup>th</sup> percentile female test device (ATD) was placed in the right-front passenger seating position according to dummy placement instructions specified in the Laboratory Procedure for NCAP Full Frontal Rigid Barrier Impact Testing.

Both ATDs were fully instrumented with head, chest and pelvis tri-axial accelerometers, chest displacement potentiometers, upper neck transducers, right/left femur load cells, and lower leg instrumentation. Seat belt load cells were installed on the driver's and passenger's lap and shoulder belts to measure dummy torso and pelvic section loading.

The driver (position 1) ATD (Serial No. 351) and the right-front passenger (position 2) ATD (Serial No. DH1659) were qualified previous to this test. Certification details, along with instrumentation calibration data, are found in Appendix C of this report.

The 634 channels of data were recorded on a data acquisition system. Appendix B contains the dummy response data traces.

There was 100 percent windshield retention and no intrusion into the protected zone of the windshield during the event. There was no Stoddard Solvent leakage after the event or during any phase of the static rollover.

The maximum static crush of the vehicle was 537 mm located to the left of vehicle centerline and both the driver and passenger side doors remained closed during the impact event and were operable after the impact.

The driver's visible contact points were as follows: The driver's head contacted the airbag. The driver's head also contacted the headrest. The driver's knees contacted the knee airbag.

The passenger's visible contact points were as follows: The passenger's head contacted the airbag. The passenger's head also contacted the headrest. The passenger's knees contacted the knee airbag.

The occupant data is summarized below:

<b>ATD position</b>	<b>HIC<sub>15</sub></b>	<b>Nij</b>	<b>Neck Tension (N)</b>	<b>Neck Comp. (N)</b>	<b>3ms Chest Clip (g)</b>	<b>Chest Disp. (mm)</b>	<b>Left Femur (N)</b>	<b>Right Femur (N)</b>
Driver (50 <sup>th</sup> )	185	0.24	846	67	46	21	370	1161
Passenger (5 <sup>th</sup> )	401	0.29	682	363	46	10	1820	1705

The test data can be found on the NHTSA website at [www.nhtsa.gov](http://www.nhtsa.gov)

### **TEST NOTES**

Bottom of Engine X recorded no valid data after 15 ms.

Barrier K-15 My recorded no valid data.

Barrier D-02 Fx recorded questionable data.

Barrier C-01 Fx recorded no valid data.

Barrier C-02 Fx recorded no valid data.

Barrier C-02 My recorded no valid data.

MGA does not endorse or certify products. The manufacturer's name appears solely for identification purposes.

**SECTION 2**  
**OCCUPANT AND VEHICLE INFORMATION / DATA SHEETS**

**DATA SHEET NO. 1  
GENERAL TEST AND VEHICLE PARAMETER DATA**

Test Vehicle: 2021 Chevrolet Trailblazer AWD LT 5-Door SUV  
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: O20210100  
 Test Date: 10/26/2020

**TEST VEHICLE INFORMATION AND OPTIONS**

NHTSA No.	O20210100	Traction Control System (TCS)	Yes
Model Year	2021	Power Steering	Yes
Make	Chevrolet	Power Window Auto-Reverse	Yes
Model	Trailblazer LT	Driver Frontal Airbag	Yes
Body Style	5-Door SUV	Driver Curtain Airbag	Yes
VIN	KL79MRSL2MB047092	Driver Head/Torso Airbag	No
Body Color	Scarlet Red Metallic	Driver Torso Airbag	No
Odometer (km/mi)	51 mi	Driver Torso/Pelvis Airbag	Yes
Engine Displacement (L)	1.3 L	Driver Pelvis Airbag	No
Type/No. Cylinders	Inline 4	Driver Knee Airbag	Yes
Engine Placement	Lateral	Front Pass. Frontal Airbag	Yes
Transmission Type	Automatic	Front Pass. Curtain Airbag	Yes
Transmission Speeds	9	Front Pass. Head/Torso Airbag	No
Overdrive	Yes	Front Pass. Torso Airbag	No
Final Drive	AWD	Front Pass. Torso/Pelvis Airbag	Yes
Roof Rack	No	Front Pass. Pelvis Airbag	No
Sunroof/T-Top	No	Front Pass. Knee Airbag	Yes
Running Boards	No	Driver Pretensioner	Yes
Tilt Steering Wheel	Yes	Driver Load Limiter	Yes
Power Seats	Yes	Front Pass. Pretensioner	Yes
Anti-Lock Brakes (ABS)	Yes	Front Pass. Load Limiter	Yes
Automatic Door Locks (ADLs)	Yes	Other	N/A

Does owner's manual provide instructions to turn off automatic door locks?	No
--	----

**DATA FROM CERTIFICATION LABEL**

Manufactured By	GM KOREA COMPANY	GVWR (kg)	2000
Date of Manufacture	08/20	GAWR Front (kg)	1060
		GAWR Rear (kg)	1060

**VEHICLE SEATING AND WEIGHT CAPACITY DATA**

Measured Parameter	Front	Rear	Third	Total
Type of Seats	Bucket	Contoured Bench		
Designated Seating Capacity (DSC)	2	3		5
Capacity Weight (VCW) (kg)				428
Cargo Weight (RCLW) (kg)				88




**DATA SHEET NO. 1 (CONTINUED)**  
**GENERAL TEST AND VEHICLE PARAMETER DATA**

Test Vehicle: 2021 Chevrolet Trailblazer AWD LT 5-Door SUV  
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: O20210100  
 Test Date: 10/26/2020

**VEHICLE TIRE INFORMATION**

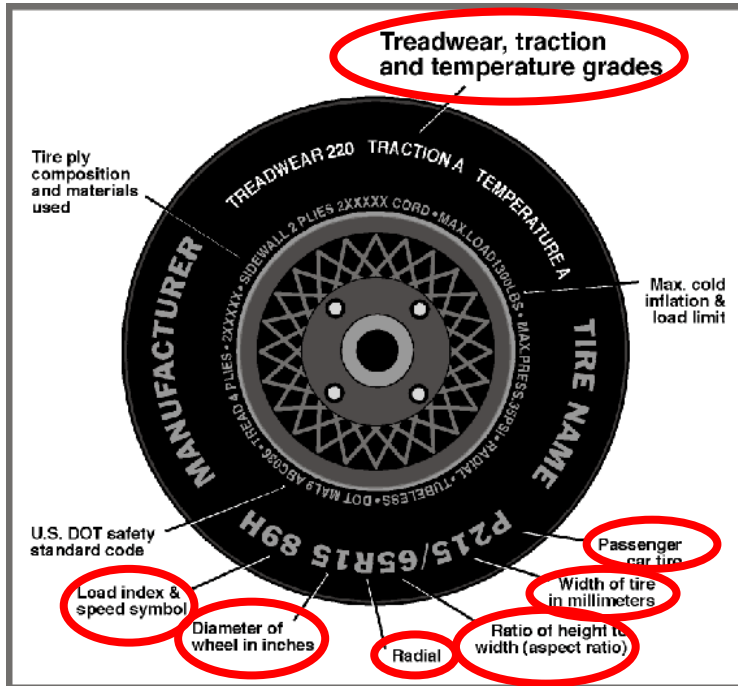

Measured Parameter	Front	Rear
Max. Tire Pressure (kPa)	350	350
Cold Pressure (kPa)	240	240
Recommended Tire Size	225/60R17	225/60R17
Tire Size on Vehicle	225/60R17	225/60R17
Tire Manufacturer	Continental	Continental
Tire Model	ProContact TX	ProContact TX
Treadwear	500	500
Traction	A	A
Temperature Grade	A	A
Tire Plies Sidewall	1 Polyester	1 Polyester
Tire Plies Body	1 Polyester, 2 Steel, 1 Polyamide	1 Polyester, 2 Steel, 1 Polyamide
Load Index/Speed Symbol	99H	99H
Tire Material	Rubber	Rubber
DOT Safety Code Left	16Y0F98YW	16Y0F98YW
DOT Safety Code Right	16Y0F98YW	16Y0F98YW

**DATA SHEET NO. 1 (CONTINUED)**  
**GENERAL TEST AND VEHICLE PARAMETER DATA**

Test Vehicle: 2021 Chevrolet Trailblazer AWD LT 5-Door SUV  
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: O20210100  
 Test Date: 10/26/2020

**TEST VEHICLE WEIGHTS**

	Units	As Delivered (UVW)			As Tested (ATW)		
		Front	Rear	Total	Front	Rear	Total
Left	kg	449.0	304.5		478.5	387.5	
Right	kg	451.5	276.0		478.5	358.0	
Ratio	%	60.8%	39.2%		56.2%	43.8%	
Totals	kg	900.5	580.5	1481.0	957.0	745.5	1702.5

**TARGET TEST WEIGHT CALCULATION**

Measured Parameter	Units	Value
Total Delivered Weight (UVW)	kg	1481.0
Weight of 1 P572E ATD & 1 P572O ATD	kg	141
Rated Cargo/Luggage Weight (RCLW)	kg	88
Calculated Test Vehicle Target Weight (TVT <sub>W</sub> )	kg	1710.0

**TEST VEHICLE ATTITUDES AND CG**

	Units	LF	RF	LR	RR	CG (aft of front axle)
As Delivered	mm	774	775	799	796	1036
As Tested	mm	764	753	766	766	1157
Post Test	mm	832	830	768	752	

**GENERAL TEST VEHICLE DATA**

Measurement Description	Units	Value
Total Vehicle Wheel Base	mm	2642
Total Vehicle Length at Left Side	mm	4249
Total Vehicle Length at Centerline	mm	4410
Total Vehicle Length at Right Side	mm	4249
Weight of Ballast in Cargo Area	kg	47
Weight of Vehicle Components Removed	kg	28
Amount of Stoddard Solvent in Fuel Tank	L	46.6

List of components removed to meet test weight: None.

List of components removed for instrumentation, data box, and equipment installation: Cargo area cover/trim/carpet, jack and tools, spare tire/cover, subwoofer, RR tail light, underbody plastic.

**DATA SHEET NO. 1 (CONTINUED)**  
**GENERAL TEST AND VEHICLE PARAMETER DATA**

Test Vehicle: 2021 Chevrolet Trailblazer AWD LT 5-Door SUV  
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: O20210100  
 Test Date: 10/26/2020

**TARGET VEHICLE STRUCTURAL MEASUREMENT**

	Elements	Pre-Test (mm)
1	Total Length	4410
2	Total Width	1766
3	Bumper Top Height	615
4	Bumper Bottom Height	500
5	Longitudinal Member Top Height	608
6	Distance between Longitudinal Members	960
7	Longitudinal Member Width	80
8	Engine Top Height	854
9	Engine Bottom Height	230
10	Engine and Gearbox Width	740
11	Front Bumper-Engine Distance	350
12	Front Shock Absorber Fixing Height	925
13	Bonnet Leading Edge Height	914
14	Front Shock Absorber Fixing Width	1175
15	Front Bumper – Front Axle Distance	900
16	Front Axle – A-Pillar Distance	500
17	A-Pillar – B-Pillar Distance	986
18	B-Pillar – Rear Axle Distance	1154
19	B-Pillar – C-Pillar Distance	1065
20	Roof Sill Bottom Height	1470
21	Roof Sill Top Height	1610
22	Floor Sill Bottom Height	250
23	Floor Sill Top Height	420


**DATA SHEET NO. 2  
SEAT ADJUSTMENT, FUEL SYSTEM, AND STEERING WHEEL DATA**

Test Vehicle: 2021 Chevrolet Trailblazer AWD LT 5-Door SUV  
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: O20210100  
 Test Date: 10/26/2020

**NOMINAL DESIGN RIDING POSITION**

The driver seat back is positioned as close as possible to the manufacturer's design angle. For the passenger seat back, seat back is adjusted following Appendix F, "Driver & Passenger Dummy Seating & Positioning Procedures" in the NCAP Test Procedure dated May 2018.

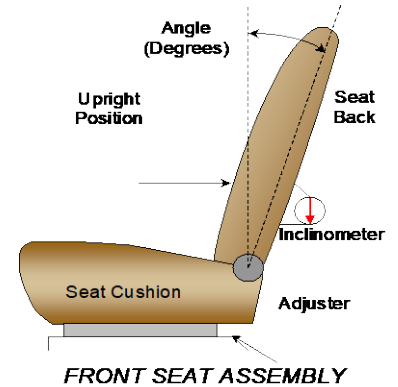

	Degrees
Driver Seat Back Angle	-7.4° on outboard headrest post
Passenger Seat Back Angle	-11.4° on outboard headrest post

**SEAT FORE/AFT POSITIONS**


The driver and passenger seat fore/aft positions are adjusted following Appendix F, "Driver & Passenger Dummy Seating & Positioning Procedures" in the NCAP Test Procedure dated May 2018.

	Total Fore/Aft Travel	Placed in Position #
Driver Seat	330 mm	165 mm
Passenger Seat	260 mm / 27 detents (1 <sup>st</sup> as 1)	0 mm / 0 <sup>th</sup> detent (1 <sup>st</sup> as 0)

**SEAT BELT UPPER ANCHORAGES**

The seat belt upper anchorages are set following the manufacturer's specified position as listed in Form 1.

	Total # of Positions	Placed in Position #
Driver Seat	4 (1 <sup>st</sup> as 1)	0 (1 <sup>st</sup> as 0)
Passenger Seat	4 (1 <sup>st</sup> as 1)	0 (1 <sup>st</sup> as 0)

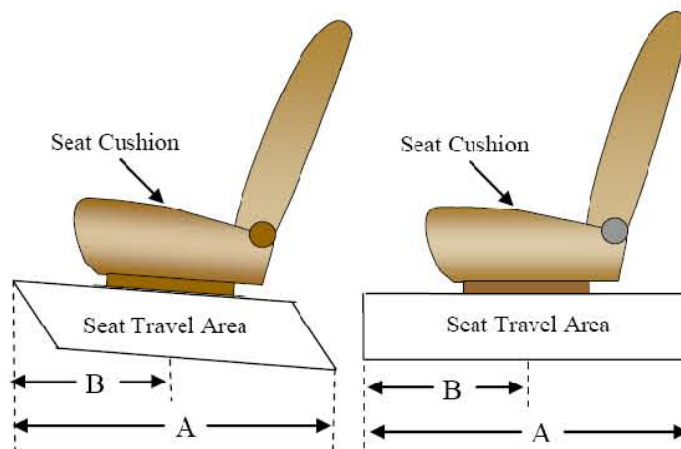

**DATA SHEET NO. 2 (CONTINUED)**  
**SEAT ADJUSTMENT, FUEL SYSTEM, AND STEERING WHEEL DATA**

Test Vehicle: 2021 Chevrolet Trailblazer AWD LT 5-Door SUV  
 Test Program: NCAP Frontal Barrier Impact Test


NHTSA No.: O20210100  
 Test Date: 10/26/2020

**FUEL TANK CAPACITY DATA**

	<b>Liters</b>
Usable Capacity of "Standard Tank"	50.0
Usable Capacity of "Optional Tank"	
92-94% of Usable Capacity	46.0 to 47.0
Actual Amount of Solvent used	46.6
1/3 of Usable Capacity	16.7

**FUEL PUMP**


The fuel pump would activate when the ignition key is turned to the 'On/Run' position. When the working pressure of fuel system is achieved; the pump will turn off. In AWD vehicle, fuel suction pump in sub-chamber of the fuel tank is activated only in condition of engine running. The filler neck is located on the driver's side.

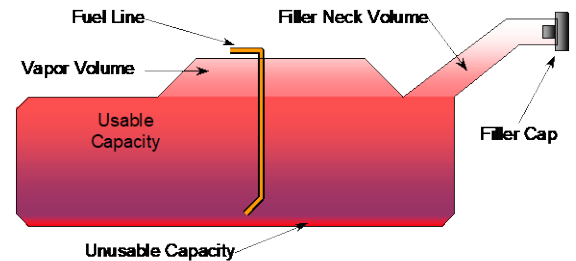

VEHICLE FUEL TANK ASSEMBLY

**STEERING COLUMN ADJUSTMENT**

Steering wheel and column adjustments are made so that the steering wheel hub is at the geometric center of the locus it describes when moved through its full range of motion. An aluminum plate is placed across the rim of the steering wheel, an inclinometer is placed on the plate and the angle is measured.

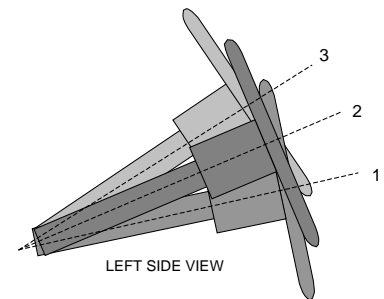

STEERING COLUMN ASSEMBLY


**STEERING COLUMN POSITION**

	<b>Degrees</b>	<b>Fore/Aft Position (mm)</b>
Lowermost Position 1	67.8	
Geometric Center Position 2	65.8	
Uppermost Position 3	63.8	
Telescoping Steering Wheel Travel		50
Test Position	65.8	25

**DATA SHEET NO. 3  
DUMMY LONGITUDINAL CLEARANCE DIMENSIONS**

Test Vehicle: 2021 Chevrolet Trailblazer AWD LT 5-Door SUV  
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: O20210100  
 Test Date: 10/26/2020

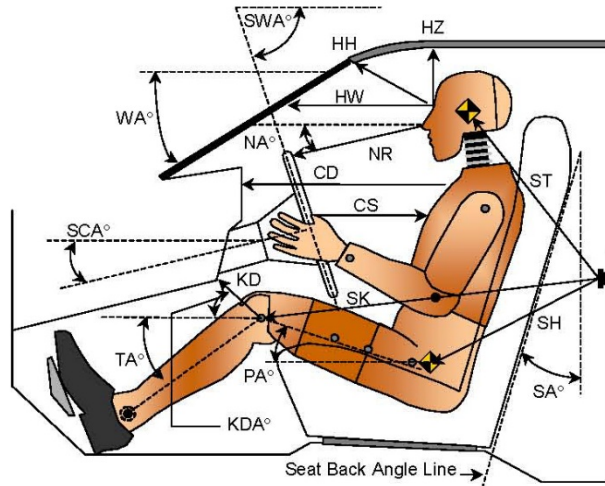


**LEFT SIDE VIEW**

Code	Measurement Description	Driver		Passenger	
		Length (mm)	Angle (°)	Length (mm)	Angle (°)
WA°	Windshield Angle		30.0		
SWA°	Steering Wheel Angle		65.8		
SCA°	Steering Column Angle		24.2		
SA°	Seat Back Angle		-7.4		-11.4
HZ	Head to Roof (Z)	254	90	262	90
HH	Head to Header	449	25.8	392	34.9
HW	Head to Windshield	717	0	689	0
NR	Nose to Rim	386	9.0		
CD	Chest to Dash	522		401	
CS	Chest to Steering Hub	311	1.4		
RA	Rim to Abdomen	196	0		
KDL	Left Knee to Dash	210	30.1	120	32.8
KDR	Right Knee to Dash	175	32.2	118	33.4
PA°	Pelvic Angle		23.1		20.9
TA°	Tibia Angle		49.2		58.7
SK	Striker to Knee	536	91.2	651	88.4
ST	Striker to Head	559	8.6	533	17.7
SH	Striker to H-Point	210	130.3	321	103.9

**DATA SHEET NO. 4  
DUMMY LATERAL CLEARANCE DIMENSIONS**

Test Vehicle: 2021 Chevrolet Trailblazer AWD LT 5-Door SUV  
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: O20210100  
 Test Date: 10/26/2020

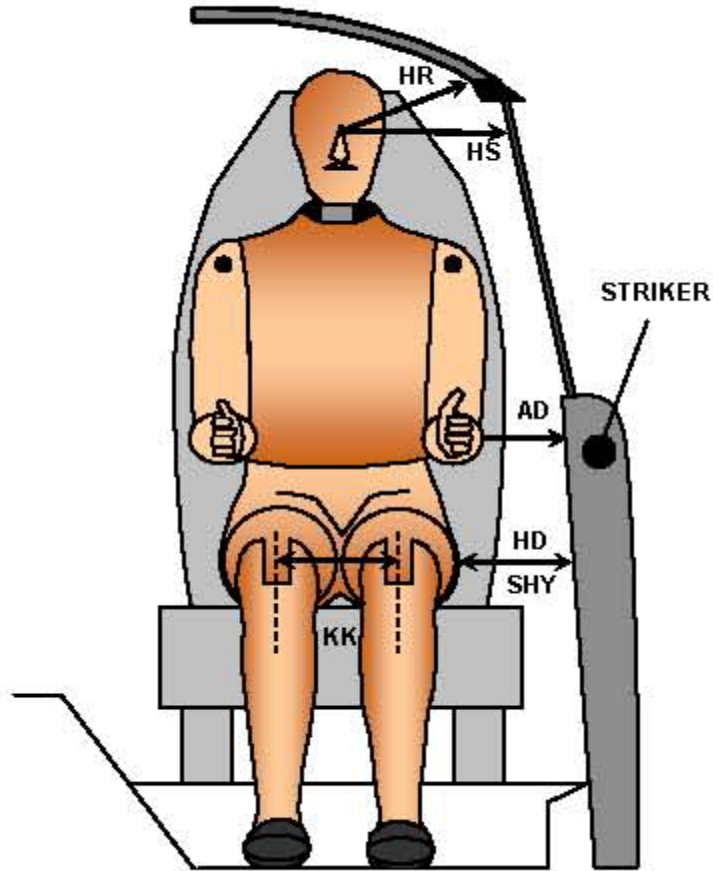


**FRONT VIEW OF DUMMY**

Code	Measurement Description	Driver	Passenger
		Length (mm)	
AD	Arm to Door	60	93
HD	H-Point to Door	149	154
HR	Head to Side Header	241	279
HS	Head to Side Window	337	370
KK	Knee to Knee	355	230
SHY	Striker to H-Point (Y Direction)	268	323
AA	Ankle to Ankle	344	165

**DATA SHEET NO. 5  
SEAT BELT POSITIONING DATA**

Test Vehicle: 2021 Chevrolet Trailblazer AWD LT 5-Door SUV  
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: O20210100  
 Test Date: 10/26/2020

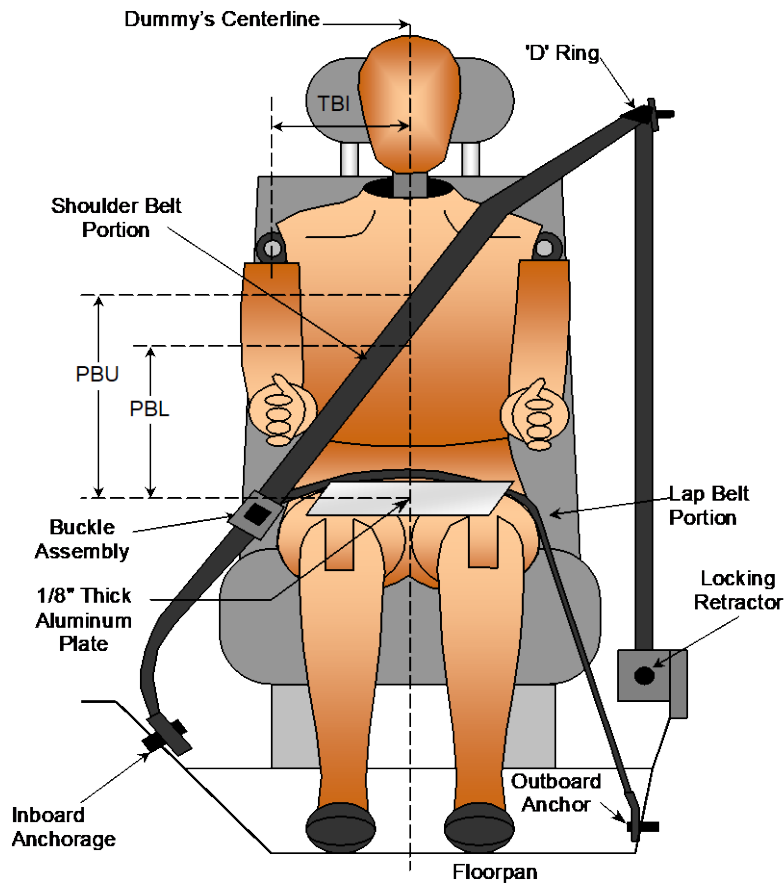

**FRONT VIEW OF DUMMY**

**SEAT BELT POSITIONING MEASUREMENTS**

Measurement Description	Units	Driver	Passenger
PBU - Top surface of reference to belt upper edge	mm	350	345
PBL - Top surface of reference to belt lower edge	mm	270	245

**BELT LENGTH DATA**

Measurement Description	Units	Driver	Passenger
Shoulder Belt Length as measured on ATD	mm	820	930
Lap Belt Length as measured on ATD	mm	565	710
Remainder of belt on reel	mm	1065	810
Total Belt Length for Continuous Webbing Systems	mm	3200	3200




**DATA SHEET NO. 6  
HIGH-SPEED CAMERA LOCATIONS AND DATA**

Test Vehicle: 2021 Chevrolet Trailblazer AWD LT 5-Door SUV  
Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: O20210100  
Test Date: 10/26/2020

**CAMERA POSITIONS FOR FRONTAL IMPACTS**

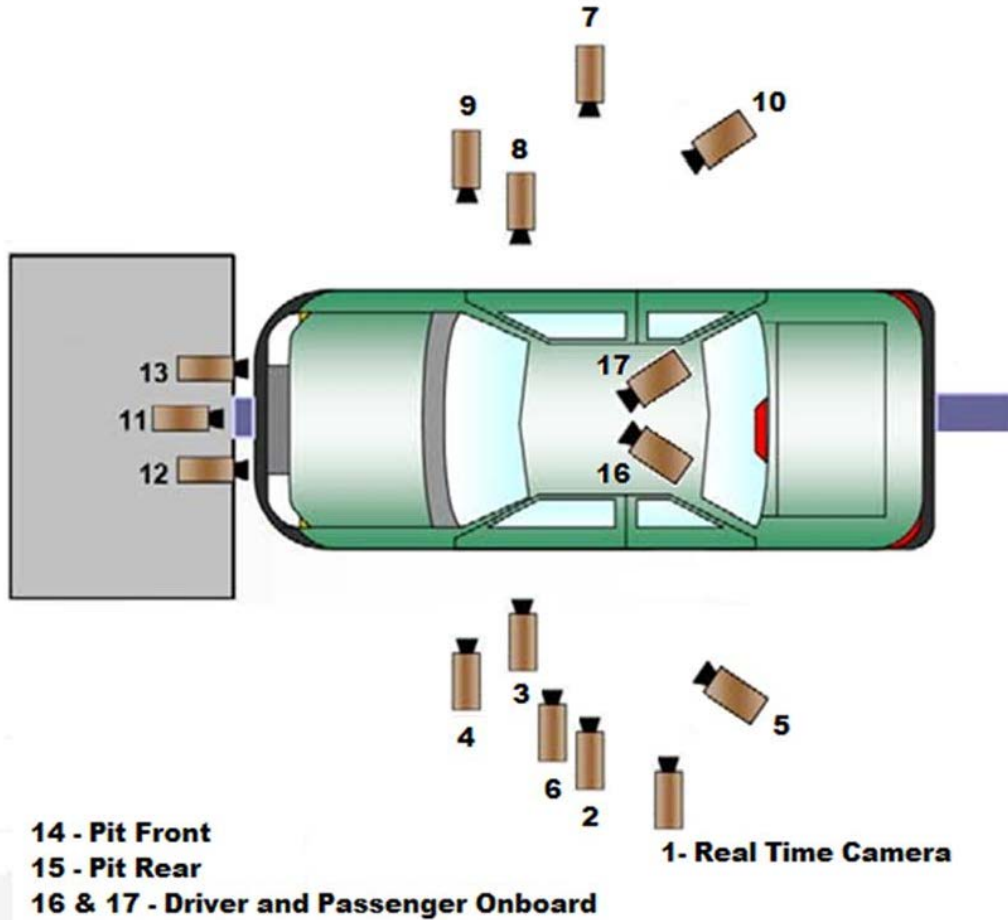

*\*\*Camera locations are approximate and not to scale*

**DATA SHEET NO. 6 (CONTINUED)**  
**HIGH-SPEED CAMERA LOCATIONS AND DATA**

Test Vehicle: 2021 Chevrolet Trailblazer AWD LT 5-Door SUV  
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: O20210100  
 Test Date: 10/26/2020

**CAMERA LOCATIONS**

No.	Camera View	Coordinates* (mm)			Lens (mm)	Speed (fps)
		X	Y	Z		
1	Real-Time Left Overall					30
2	Left Overall	-2030	-5540	-1270	12	1000
3	Driver Close-Up	-1360	-6860	-1770	50	1000
4	Left Front Half	-1370	-5260	-1270	24	1000
5	Left Angle	-7300	-5850	-1800	75	1000
6	Steering Column	-1030	-5060	-1250	50	1000
7	Right Overall	-1940	5830	-1230	12	1000
8	Passenger Close-Up	-1530	6710	-1737	50	1000
9	Right Front Half	-1120	5470	-1250	24	1000
10	Right Angle	-7480	5600	-1810	75	1000
11	Windshield	180	0	-2310	12	1000
12	Driver Windshield	190	-370	-2230	25	1000
13	Passenger Windshield	190	370	-2230	25	1000
14	Pit Front	-800	0	3340	24	1000
15	Pit Rear	-3030	0	3340	24	1000
16	Driver Onboard				12	1000
17	Passenger Onboard				12	1000
18	Real-Time Pan View					30

\*COORDINATES:

+X = forward of impact plane



+Y = right of monorail centerline

+Z = below ground level

**DATA SHEET NO. 7  
VEHICLE ACCELEROMETER LOCATIONS**

Test Vehicle: 2021 Chevrolet Trailblazer AWD LT 5-Door SUV  
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: O20210100  
 Test Date: 10/26/2020

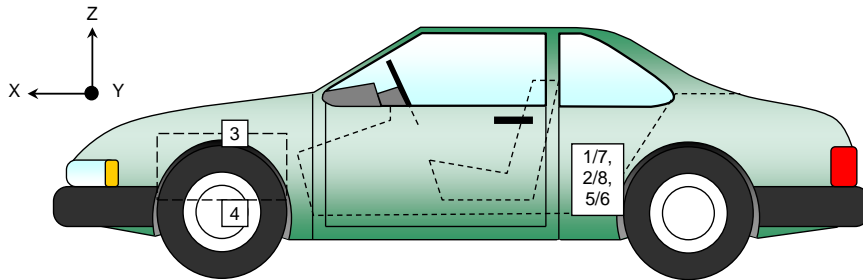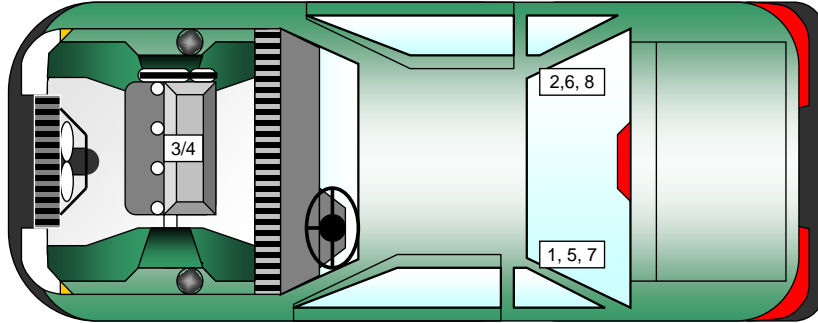

**VEHICLE ACCELEROMETER PRE-TEST LOCATIONS**

No.	Accelerometer Location	Measurements (mm)		
		X	Y	Z
1	Left Rear Crossmember Accelerometer – X Direction	1640	-335	-214
2	Right Rear Crossmember Accelerometer – X Direction	1640	305	-220
3	Engine Top X	3709	0	-854
4	Engine Bottom X	3660	30	-230
5	Left Rear Crossmember Accelerometer – Z Direction	1640	-335	-214
6	Right Rear Crossmember Accelerometer – Z Direction	1640	305	-220
7	Left Rear Crossmember Accelerometer Redundant – X Direction	1640	-370	-214
8	Right Rear Crossmember Accelerometer Redundant – X Direction	1640	342	-220




Reference Points: X - Rear Surface of Vehicle (+ forward)  
 Y - Vehicle Centerline (+ to right)  
 Z - Ground Plane (+ down)

**DATA SHEET NO. 8  
PHOTOGRAPHIC REFERENCE TARGET LOCATIONS**

Test Vehicle: 2021 Chevrolet Trailblazer AWD LT 5-Door SUV  
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: O20210100  
 Test Date: 10/26/2020

Item	Value (mm)
A	350
B	883
C	2300
D	610
E	1500
F	105
G	
H	951
I	1404
J	812
K	812
L	1382
M	951
N	1382
O	812
P	812
Q	1404

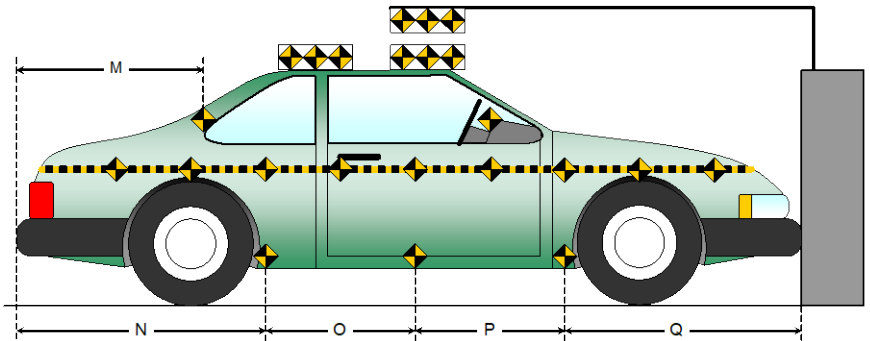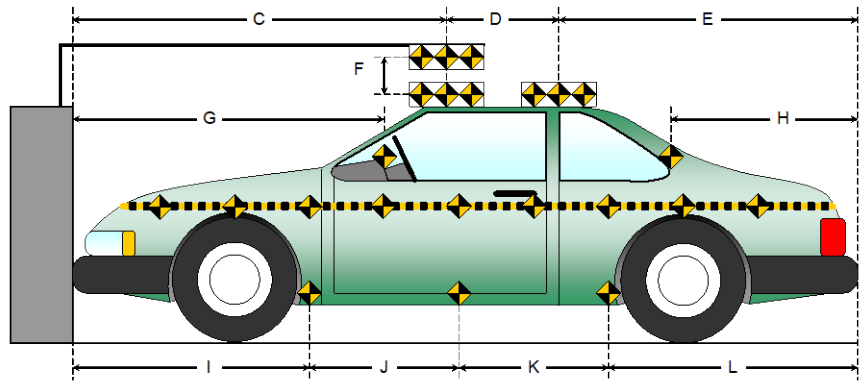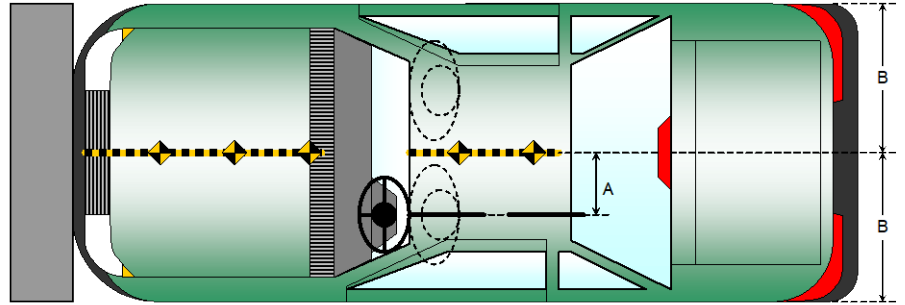

**DATA SHEET NO. 9  
LOAD CELL LOCATIONS ON FIXED BARRIER**

Test Vehicle: 2021 Chevrolet Trailblazer AWD LT 5-Door SUV  
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: O20210100  
 Test Date: 10/26/2020

**ADVANCED RESEARCH LOAD CELL BARRIER**

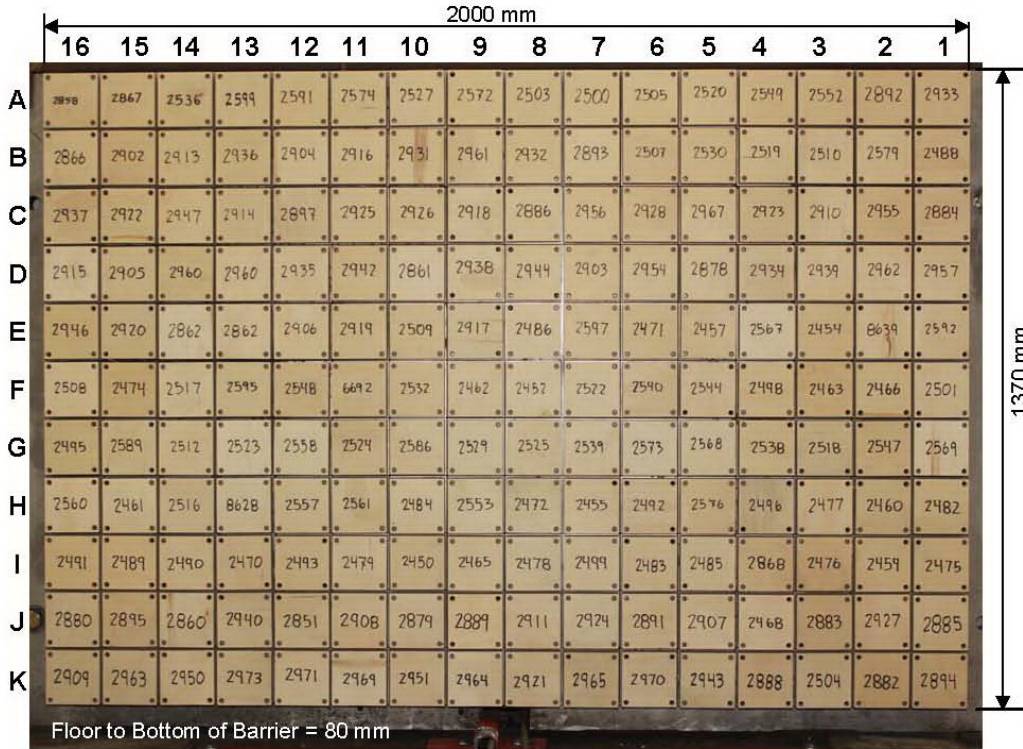


Photo for Reference Only

Centerline

A-16	A-15	A-14	A-13	A-12	A-11	A-10	A-09	A-08	A-07	A-06	A-05	A-04	A-03	A-02	A-01
B-16	B-15	B-14	B-13	B-12	B-11	B-10	B-09	B-08	B-07	B-06	B-05	B-04	B-03	B-02	B-01
C-16	C-15	C-14	C-13	C-12	C-11	C-10	C-09	C-08	C-07	C-06	C-05	C-04	C-03	C-02	C-01
D-16	D-15	D-14	D-13	D-12	D-11	D-10	D-09	D-08	D-07	D-06	D-05	D-04	D-03	D-02	D-01
E-16	E-15	E-14	E-13	E-12	E-11	E-10	E-09	E-08	E-07	E-06	E-05	E-04	E-03	E-02	E-01
F-16	F-15	F-14	F-13	F-12	F-11	F-10	F-09	F-08	F-07	F-06	F-05	F-04	F-03	F-02	F-01
G-16	G-15	G-14	G-13	G-12	G-11	G-10	G-09	G-08	G-07	G-06	G-05	G-04	G-03	G-02	G-01
H-16	H-15	H-14	H-13	H-12	H-11	H-10	H-09	H-08	H-07	H-06	H-05	H-04	H-03	H-02	H-01
I-16	I-15	I-14	I-13	I-12	I-11	I-10	I-09	I-08	I-07	I-06	I-05	I-04	I-03	I-02	I-01
J-16	J-15	J-14	J-13	J-12	J-11	J-10	J-09	J-08	J-07	J-06	J-05	J-04	J-03	J-02	J-01
K-16	K-15	K-14	K-13	K-12	K-11	K-10	K-09	K-08	K-07	K-06	K-05	K-04	K-03	K-02	K-01

Load Cells are 121 mm x 121 mm with a 7 mm gap in between each load cell.

**DATA SHEET NO. 10**  
**TEST VEHICLE SUMMARY OF RESULTS**

Test Vehicle: 2021 Chevrolet Trailblazer AWD LT 5-Door SUV  
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: O20210100  
 Test Date: 10/26/2020

**INSTRUMENTATION**

Instrumentation	Number of Channels Collected
Driver Dummy Data Channels	49
Passenger Dummy Data Channels	49
Vehicle Structure Accelerometers	8
Barrier Channels	528
Total	634

**CAMERA COVERAGE**

Type of Camera	Number Used in this Test
High-Speed Vehicle Onboard	2
High-Speed Offboard	14
Real-Time	2
Total	18

**DATA SHEET NO. 11  
POST-TEST OBSERVATIONS**

Test Vehicle: 2021 Chevrolet Trailblazer AWD LT 5-Door SUV  
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: O20210100  
 Test Date: 10/26/2020

**TEST DUMMY INFORMATION AND CONTACT LOCATIONS**

Description	Driver	Passenger
Dummy Type / Serial No.	HIII 50% / 351	HIII 5% / DH1659
Head Contact	Frontal Airbag, Headrest	Frontal Airbag, Headrest
Upper Torso Contact	None	None
Lower Torso Contact	None	None
Left Knee Contact	Knee Airbag	Knee Airbag
Right Knee Contact	Knee Airbag	Knee Airbag

**DOOR OPENING, TRUNK OPENING, AND SEAT TRACK INFORMATION**

Description	Driver	Passenger
Locked/Unlocked Doors	Doors were locked	Doors were locked
Front Door Opening	Remained closed and unlocked; opened without tools	Remained closed and unlocked; opened without tools
Rear Door Opening	Remained closed and unlocked; opened without tools	Remained closed and unlocked; opened without tools
Trunk/Hatch/Tailgate Opening	Remained closed; opened without tools	
Seat Track Shift (mm)	0	0
Seat Back Movement	None	None

**OTHER VEHICLE POST-TEST OBSERVATIONS**

Critical Areas of Performance	Observations and Conclusions
Windshield Damage	None
Window Damage	None
Other Notable Effects	None

**VEHICLE REBOUND FROM BARRIER**

Measured Parameter	Units	Value
Left Side	mm	1365
Center	mm	1320
Right Side	mm	1320
Average	mm	1335


**SUPPLEMENTAL RESTRAINT SYSTEM INFORMATION**

Restraint Type	Driver		Passenger	
	Mounted	Deployed	Mounted	Deployed
Frontal Airbag	Yes	Yes	Yes	Yes
Curtain Side Airbag	Yes	No	Yes	No
Torso/Pelvis Side Airbag	Yes	No	Yes	No
Knee Airbag	Yes	Yes	Yes	Yes
Seat Belt Pretensioner	Yes	Yes	Yes	Yes
Seat Belt Load Limiter	Yes		Yes	
Other				

## DATA SHEET NO. 12 VEHICLE PROFILE MEASUREMENTS

Test Vehicle: 2021 Chevrolet Trailblazer AWD LT 5-Door SUV  
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: O20210100  
 Test Date: 10/26/2020

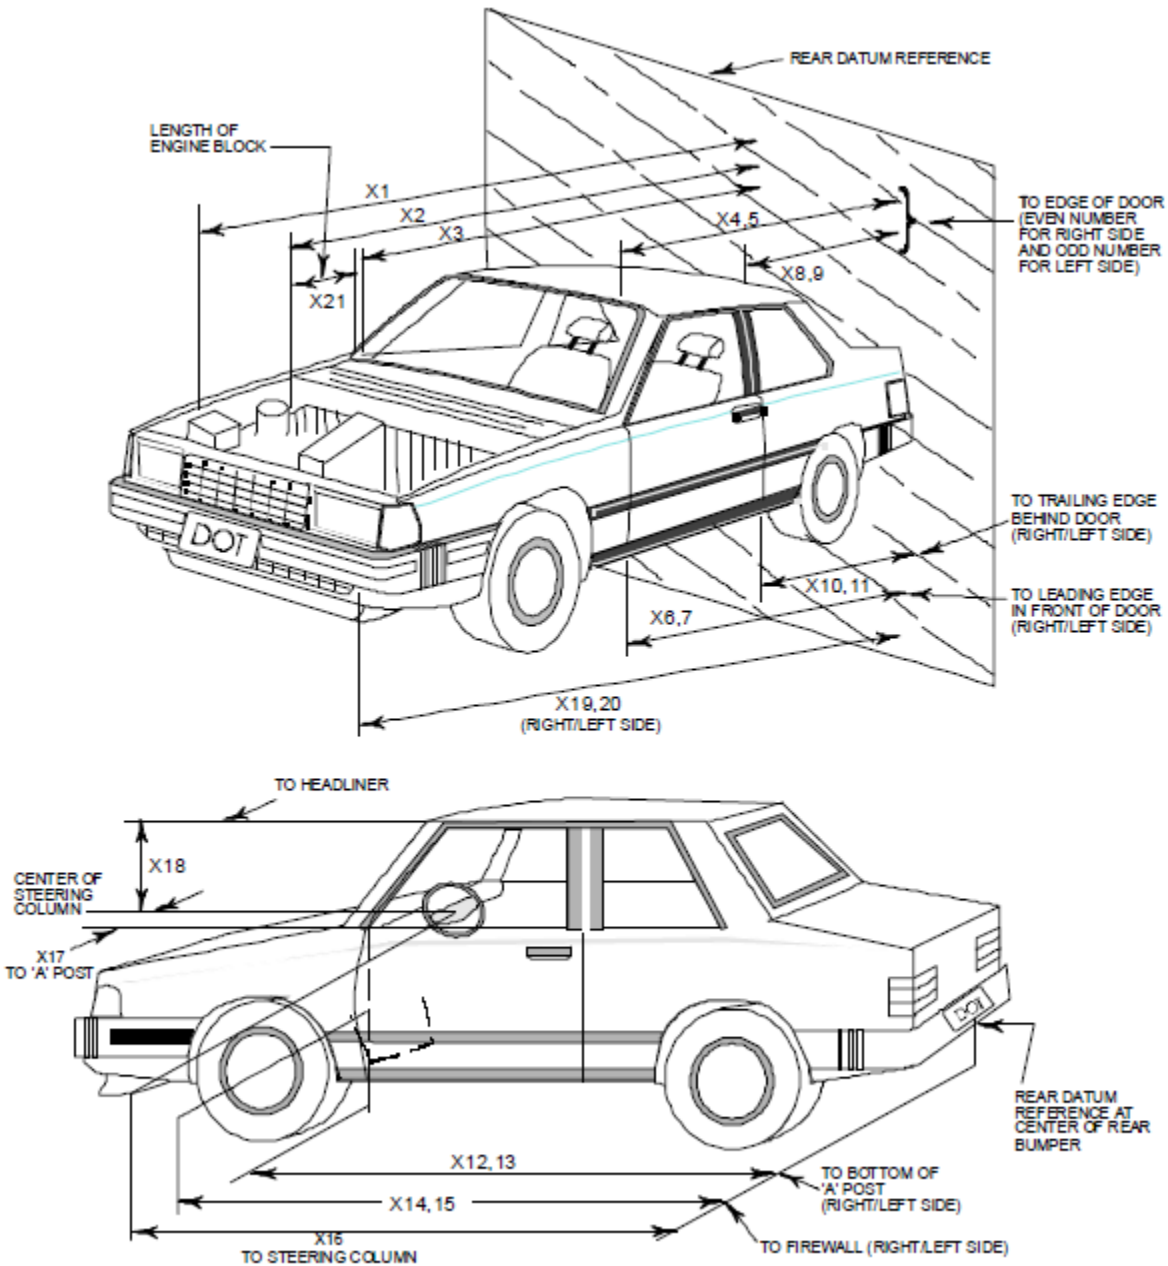



**DATA SHEET NO. 12 (CONTINUED)  
VEHICLE PROFILE MEASUREMENTS**

Test Vehicle: 2021 Chevrolet Trailblazer AWD LT 5-Door SUV  
Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: O20210100  
Test Date: 10/26/2020

<b>No.</b>	<b>Measurement Description</b>	<b>Pre-Test</b>	<b>Post-Test</b>	<b>Difference</b>
1	Total Length of Vehicle at Centerline	4410	3908	502
2	RSOV to Front of Engine	3763	3250	513
3	RSOV to Firewall	3409	3403	6
4	RSOV to Upper Leading Edge of Right Door	2957	2940	17
5	RSOV to Upper Leading Edge of Left Door	2958	2945	13
6	RSOV to Lower Leading Edge of Right Door	2945	2952	-7
7	RSOV to Lower Leading Edge of Left Door	2947	2955	-8
8	RSOV to Upper Trailing Edge of Right Door	1920	1902	18
9	RSOV to Upper Trailing Edge of Left Door	1924	1905	19
10	RSOV to Lower Trailing Edge of Right Door	1983	1980	3
11	RSOV to Lower Trailing Edge of Left Door	1985	1979	6
12	RSOV to Bottom of "A" Post of Right Side	2920	2930	-10
13	RSOV to Bottom of "A" Post of Left Side	2940	2913	27
14	RSOV to Firewall, Right Side	3230	3218	12
15	RSOV to Firewall, Left Side	3235	3221	14
16	RSOV to Steering Column	2491	2602	-111
17	Center of Steering Column to "A" Post	384	375	9
18	Center of Steering Column to Headliner	443	457	-14
19	RSOV to Right Side of Front Bumper	4249	3929	320
20	RSOV to Left Side of Front Bumper	4249	3819	430
21	Length of Engine Block	394	394	0
RD	RSOV to Right Side of Dash Panel	2790	2806	-16
CD	RSOV to Center of Dash Panel	2774	2808	-34
LD	RSOV to Left Side of Dash Panel	2790	2801	-11

All Dimensions in mm

**DATA SHEET NO. 13**  
**ACCIDENT INVESTIGATION DIVISION DATA**

Test Vehicle: 2021 Chevrolet Trailblazer AWD LT 5-Door SUV  
Test Program: NCAP Frontal Barrier Impact Test


NHTSA No.: O20210100  
Test Date: 10/26/2020

**VEHICLE INFORMATION**

VIN:	<u>KL79MRSL2MB047092</u>	Wheelbase (mm):	<u>2642</u>
Vehicle Size Category:	<u>MPV</u>	Test Weight (kg):	<u>1702.5</u>

**ACCELEROMETER DATA**

Accelerometer Locations:	<u>As per Data Sheet No. 7</u>
Cal. Procedure/Interval:	<u>MGA Procedure / 6 month</u>
Integration Algorithm:	<u>Trapezoidal</u>
Linearity:	<u>&gt; 99%</u>
Impact Velocity (km/h):	<u>56.20</u>
Velocity Change (km/h):	<u>68.5</u>
Time of Separation (msec)	<u>92</u>

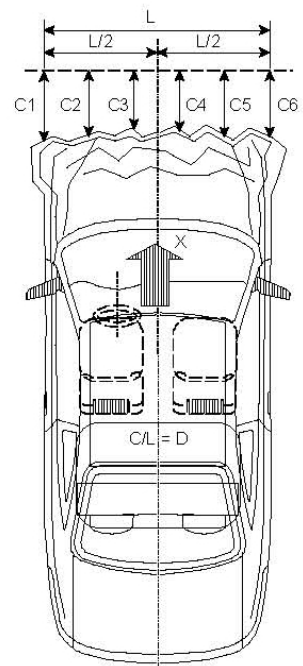

**CRUSH PROFILE**

Collision Deformation Classification:	<u>12FDEW3</u>
Midpoint of Damage:	<u>Centerline</u>
Damage Region Length (mm):	<u>1360</u>
Impact Mode:	<u>Frontal</u>

No.	Measurement Description	Units	Pre-Test	Post-Test	Difference
C1	Crush zone 1 at left side	mm	4249	3819	430
C2	Crush zone 2 at left side	mm	4357	3831	526
C3	Crush zone 3 at left side	mm	4396	3859	537
C4	Crush zone 4 at right side	mm	4396	3880	516
C5	Crush zone 5 at right side	mm	4357	3862	495
C6	Crush zone 6 at right side	mm	4249	3929	320
L	C1 TO C6	mm	1360	1316	44

**DATA SHEET NO. 14  
VEHICLE INTRUSION MEASUREMENTS**

Test Vehicle: 2021 Chevrolet Trailblazer AWD LT 5-Door SUV  
 Test Program: NCAP Frontal Barrier Impact Test



NHTSA No.: O20210100  
 Test Date: 10/26/2020

**DOOR OPENING WIDTH**

Item	Description	Units	Pre-Test	Post-Test	Difference
A	Left Side Upper	mm	940	940	0
B	Left Side Lower	mm	887	887	0
D	Right Side Upper	mm	935	935	0
E	Right Side Lower	mm	884	884	0

**WHEELBASE MEASUREMENTS**

Item	Description	Units	Pre-Test	Post-Test	Difference
C	Left Side Wheelbase	mm	2642	2554	88
F	Right Side Wheelbase	mm	2642	2544	98

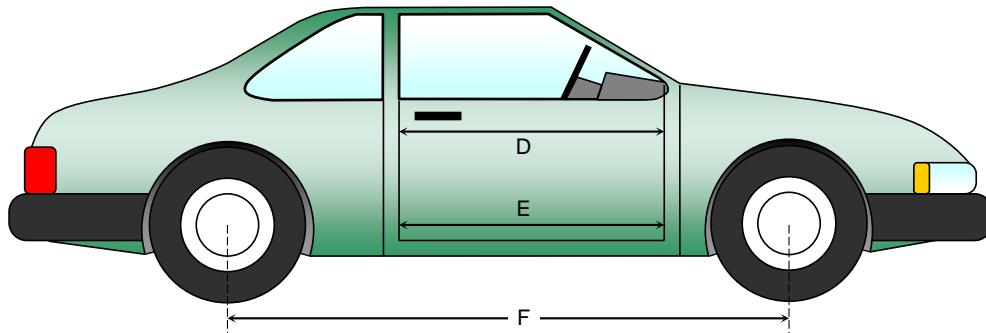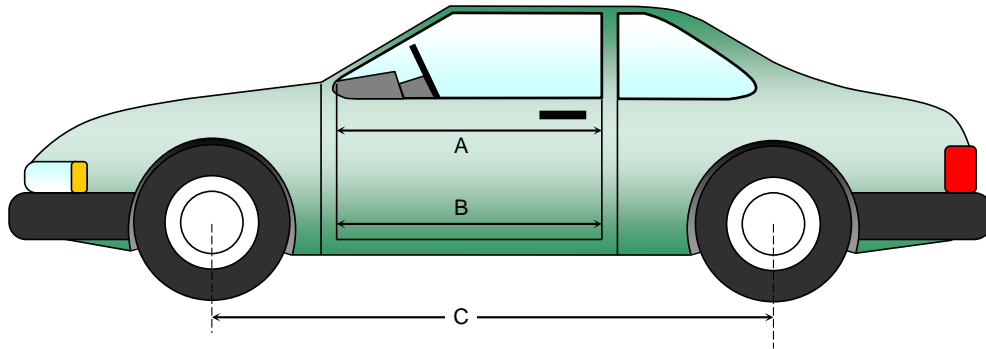

**DATA SHEET NO. 14 (CONTINUED)  
VEHICLE INTRUSION MEASUREMENTS**


Test Vehicle: 2021 Chevrolet Trailblazer AWD LT 5-Door SUV  
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: O20210100  
 Test Date: 10/26/2020

**DRIVER COMPARTMENT INTRUSION**

Item	Description	Units	Pre-Test	Post-Test	Difference
AB	Door Opening (Inside Window Jam)	mm	740	740	0
CX	Left Knee Bolster to X	mm	347	339	8
DX	Right Knee Bolster to X	mm	354	343	11
EX	Brake Pedal to X	mm	558	477	81
FX	Foot Rest to X	mm	595	580	15
GX	Center of Steering Column Wheel Hub to X	mm	91	159	-68

X = Front of Seat Track (stationary)

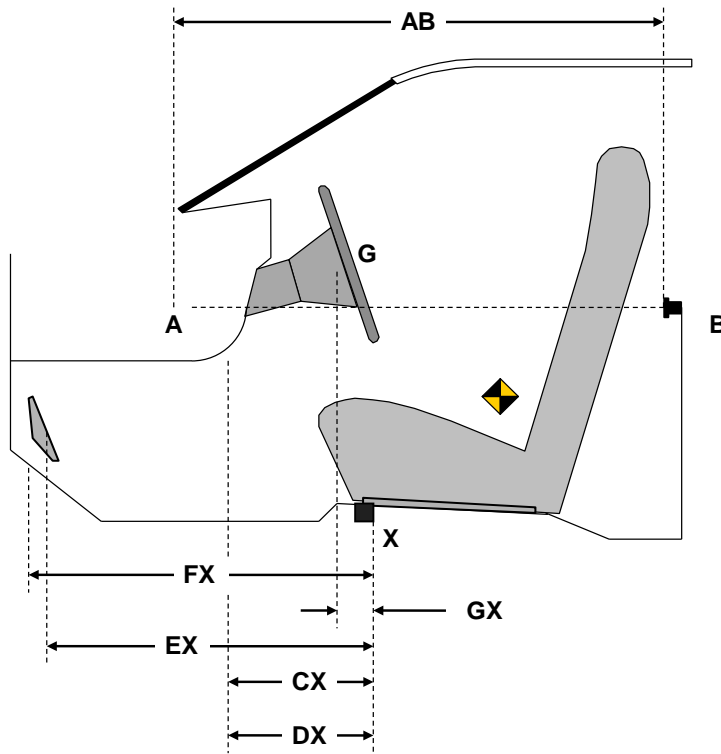

**DRIVER COMPARTMENT**

**DATA SHEET NO. 15**  
**SUMMARY OF FMVSS 212 AND FMVSS 219 (PARTIAL) DATA**

Test Vehicle: 2021 Chevrolet Trailblazer AWD LT 5-Door SUV  
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: O20210100  
 Test Date: 10/26/2020

**WINDSHIELD MOUNTING DETAILS**


Windshield glass is secured to the vehicle frame with a rubber trim and glue.

The standard requires that the post-test retention measurement be a minimum of 75 percent of the pre-test total periphery measurement for vehicles not equipped with occupant passive restraints and 50 percent for each side of the windshield for vehicles which are equipped with occupant passive restraints.

Temperature of windshield molding during test: 21.7°C.

**WINDSHIELD PERIPHERY MEASUREMENTS**

Measurement	Pre-Test (mm)	Post-Test (mm)	% of Retention
Left Side	2090	2090	100
Right Side	2090	2090	100
Total	4180	4180	100

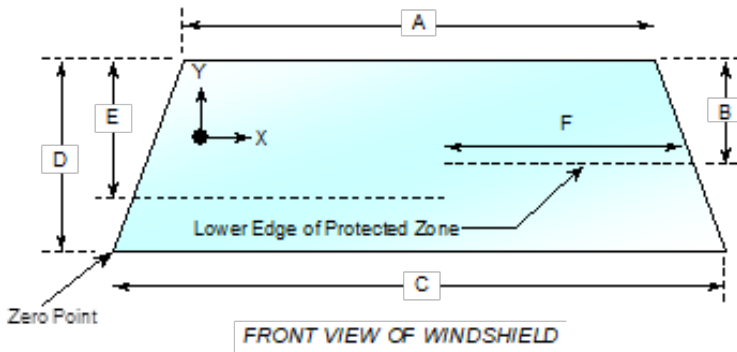

Item	Units	Value
A	mm	1172
B	mm	461
C	mm	1498
D	mm	755
E	mm	456
F	mm	504

**AREA OF PROTECTED ZONE FAILURES**

A. Provide coordinates of the area that the protected zone was penetrated more than 0.25 inches by a vehicle component other than one that is normally in contact with the windshield. **None**

X	Y

B. Provide coordinates of the area beneath the protected zone that the inner surface of the windshield was penetrated by a vehicle component. **None**

X	Y

**DATA SHEET NO. 16**  
**FMVSS 301 BARRIER IMPACT AND STATIC ROLLOVER**

Test Vehicle: 2021 Chevrolet Trailblazer AWD LT 5-Door SUV  
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: O20210100  
 Test Date: 10/26/2020


**FMVSS 301 FUEL SYSTEM INTEGRITY POST IMPACT DATA**

Temperature at Time of Impact: 21.7°C

Test Time: 11:00 a.m.

- A. From impact until vehicle motion ceases: (Maximum Allowable = 1 ounce) 0.0 oz.  
 B. For the 5 minute period after motion ceases: (Maximum Allowable = 5 ounces) 0.0 oz.  
 C. For the following 25 minutes: (Maximum Allowable = 1 ounce / minute) None  
 D. Spillage Details: None

**FMVSS 301 STATIC ROLLOVER RESULTS**

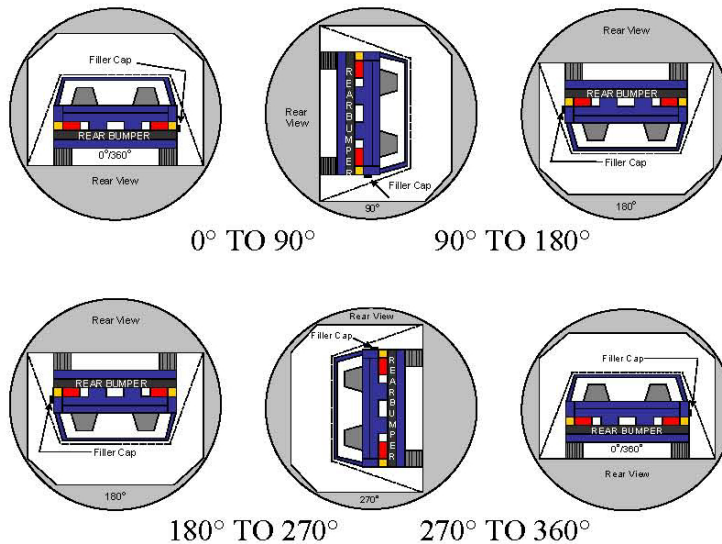

1. The specified fixture rollover rate for each 90° of rotation is 60 to 180 seconds.
2. The position hold time at each position is 300 seconds (minimum).
3. Details of Stoddard Solvent spillage: **None**

**SOLVENT COLLECTION TIME TABLE IN SECONDS**

Test Phase	Rotation Time	Hold Time	Total Time
0° to 90°	109	300	409
90° to 180°	112	300	412
180° to 270°	107	300	407
270° to 360°	111	300	411

**DATA SHEET NO. 16 (CONTINUED)**  
**FMVSS 301 BARRIER IMPACT AND STATIC ROLLOVER**

Test Vehicle: 2021 Chevrolet Trailblazer AWD LT 5-Door SUV  
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: O20210100  
 Test Date: 10/26/2020

**FMVSS 301 SPILLAGE TABLE (UNITS IN OUNCES)**

Test Phase	First 5 Minutes	Sixth Minute	Seventh Minute	Eight Minute
0° to 90°	0	0	0	
90° to 180°	0	0	0	
180° to 270°	0	0	0	
270° to 360°	0	0	0	


**SOLVENT SPILLAGE LOCATION TABLE**

Test Phase	Spillage Location
0° to 90°	
90° to 180°	
180° to 270°	
270° to 360°	

**DATA SHEET NO. 17**  
**DUMMY/VEHICLE TEMPERATURE STABILIZATION DATA**

Test Vehicle: 2021 Chevrolet Trailblazer AWD LT 5-Door SUV  
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: O20210100  
 Test Date: 10/26/2020

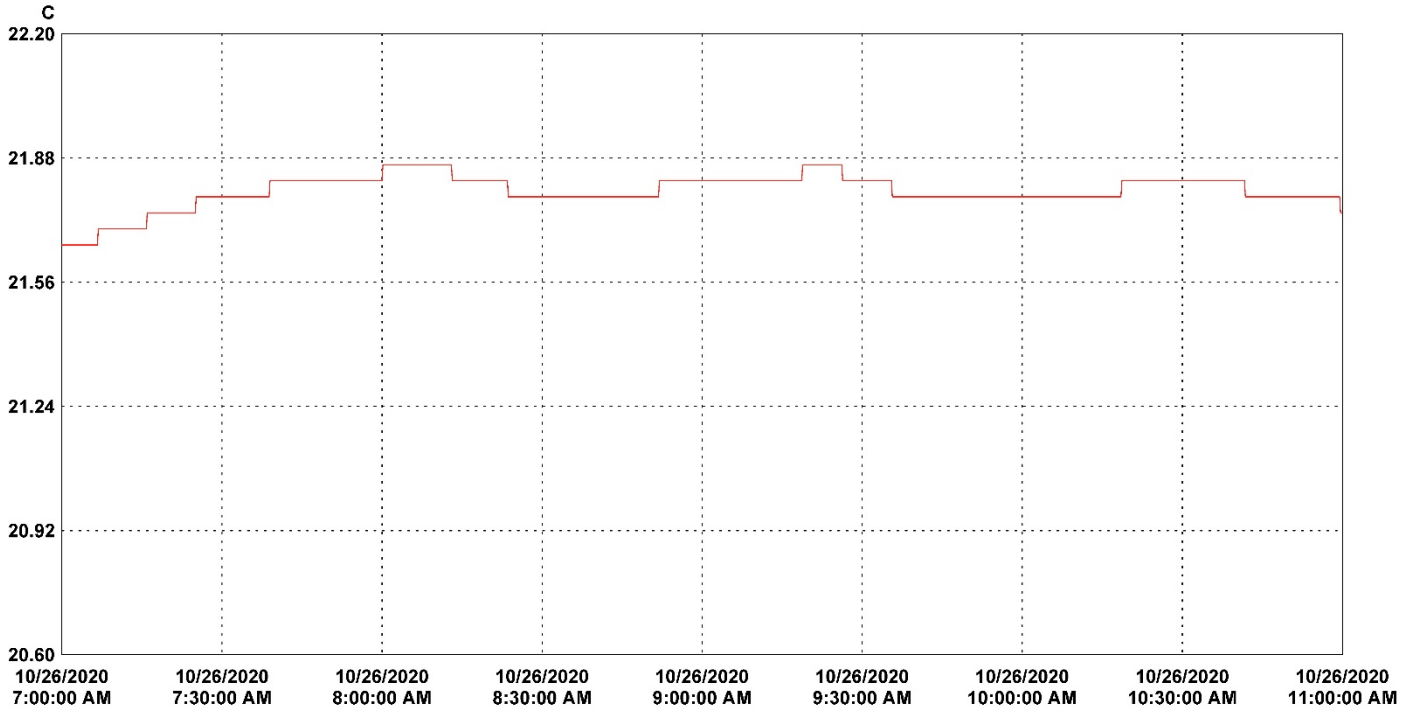

30 minutes/div 4 hours (M/d/yyyy h:mm:ss tt) Central Time Graph file (truncated): O20210100 2021 Chevrolet Trailblazer AWD LT 5-Door SUV NCAP:

LN	Serial #	Description	CH	Value	Maximum	Average	Minimum	Units	CH description	Logger file
1	15212045	VSC_Prep_Room	1		21.86	21.79	21.66	C	Temperature	15212045_VSC_Prep_Room.spl



**APPENDIX A  
PHOTOGRAPHS**

## TABLE OF PHOTOGRAPHS

		<u>Page No.</u>
Photo No. 001	Load Cell Location	A-1
Photo No. 002	Pre-Test Load Cell Wall	A-1
Photo No. 003	Post-Test Load Cell Wall	A-2
Photo No. 004	Manufacturer's Label	A-2
Photo No. 005	Tire Placard	A-3
Photo No. 006	2021 Chevrolet Trailblazer AWD LT 5-Door SUV Frontal As Delivered	A-3
Photo No. 007	Left Rear 3-4 View, As Received	A-4
Photo No. 008	Pre-Test Front View of Test Vehicle	A-4
Photo No. 009	Post-Test Front View of Test Vehicle	A-5
Photo No. 010	Pre-Test Left View of Test Vehicle	A-5
Photo No. 011	Post-Test Left View of Test Vehicle	A-6
Photo No. 012	Pre-Test Right View of Test Vehicle	A-6
Photo No. 013	Post-Test Right View of Test Vehicle	A-7
Photo No. 014	Pre-Test Right Front 3-4 View	A-7
Photo No. 015	Post-Test Right Front 3-4 View	A-8
Photo No. 016	Pre-Test Left Rear 3-4 View	A-8
Photo No. 017	Post-Test Left Rear 3-4 View	A-9
Photo No. 018	Pre-Test Windshield View	A-9
Photo No. 019	Post-Test Windshield View	A-10
Photo No. 020	Pre-Test Engine Compartment View	A-10
Photo No. 021	Post-Test Engine Compartment View	A-11
Photo No. 022	Pre-Test Fuel Filler Cap View	A-11
Photo No. 023	Post-Test Fuel Filler Cap View	A-12
Photo No. 024	Pre-Test Front Underbody View	A-12
Photo No. 025	Post-Test Front Underbody View	A-13
Photo No. 026	Pre-Test Rear Underbody View	A-13
Photo No. 027	Post-Test Rear Underbody View	A-14
Photo No. 028	Pre-Test Dummy Cable Routing	A-14
Photo No. 029	Post-Test Dummy Cable Routing	A-15

		<u>Page No.</u>
Photo No. 030	Pre-Test Driver Dummy Front View	A-15
Photo No. 031	Post-Test Driver Dummy Front View	A-16
Photo No. 032	Pre-Test Driver Dummy Window View	A-16
Photo No. 033	Post-Test Driver Dummy Window View	A-17
Photo No. 034	Pre-Test Driver Dummy and Vehicle Interior View	A-17
Photo No. 035	Post-Test Driver Dummy and Vehicle Interior View	A-18
Photo No. 036	Pre-Test Driver's Seat Fore-Aft Markings	A-18
Photo No. 037	Post-Test Driver's Seat Fore-Aft Markings	A-19
Photo No. 038	Pre-Test View of Belt Anchorage for Driver Dummy	A-19
Photo No. 039	Post-Test View of Belt Anchorage for Driver Dummy	A-20
Photo No. 040	Pre-Test View of Belt Buckle and Latch Plate for Driver Dummy	A-20
Photo No. 041	Post-Test View of Belt Buckle and Latch Plate for Driver Dummy	A-21
Photo No. 042	Pre-Test Driver Dummy Feet	A-21
Photo No. 043	Post-Test Driver Dummy Feet	A-22
Photo No. 044	Pre-Test Driver's Side Knee Bolster	A-22
Photo No. 045	Post-Test Driver's Side Knee Bolster	A-23
Photo No. 046	Pre-Test Driver's Side Floorpan	A-23
Photo No. 047	Post-Test Driver's Side Floorpan	A-24
Photo No. 048	Post-Test Driver Dummy Face	A-24
Photo No. 049	Post-Test Driver Dummy Contact with Airbag	A-25
Photo No. 050	Post-Test Driver Dummy Contact with Headrest	A-25
Photo No. 051	Pre-Test View of the Steering Wheel	A-26
Photo No. 052	Post-Test View of the Steering Wheel	A-26
Photo No. 053	Pre-Test Passenger Dummy Front View	A-27
Photo No. 054	Post-Test Passenger Dummy Front View	A-27
Photo No. 055	Pre-Test Passenger Dummy Window View	A-28
Photo No. 056	Post-Test Passenger Dummy Window View	A-28
Photo No. 057	Pre-Test Passenger Dummy and Vehicle Interior	A-29
Photo No. 058	Post-Test Passenger Dummy and Vehicle Interior	A-29
Photo No. 059	Pre-Test Passenger's Seat Fore-Aft Markings	A-30

		<u>Page No.</u>
Photo No. 060	Post-Test Passenger's Seat Fore-Aft Markings	A-30
Photo No. 061	Pre-Test View of Belt Anchorage for Passenger Dummy	A-31
Photo No. 062	Post-Test View of Belt Anchorage for Passenger Dummy	A-31
Photo No. 063	Pre-Test View of Belt Buckle and Latch Plate for Passenger Dummy	A-32
Photo No. 064	Post-Test View of Belt Buckle and Latch Plate for Passenger Dummy	A-32
Photo No. 065	Pre-Test Passenger Dummy Feet	A-33
Photo No. 066	Post-Test Passenger Dummy Feet	A-33
Photo No. 067	Pre-Test Passenger's Side Knee Bolster	A-34
Photo No. 068	Post-Test Passenger's Side Knee Bolster	A-34
Photo No. 069	Pre-Test Passenger's Side Floorpan	A-35
Photo No. 070	Post-Test Passenger's Side Floorpan	A-35
Photo No. 071	Post-Test Passenger Dummy Face	A-36
Photo No. 072	Post-Test Passenger Dummy Contact with Airbag	A-36
Photo No. 073	Post-Test Passenger Dummy Contact with Headrest	A-37
Photo No. 074	Ballast Installed in Vehicle	A-37
Photo No. 075	Post-Test Stoddard Solvent Spillage Location View	A-38
Photo No. 076	Post-Test Speed Trap Read-Out	A-38
Photo No. 077	Vehicle at 0 Degree on Static Rollover Device	A-39
Photo No. 078	Vehicle at 90 Degrees on Static Rollover Device	A-39
Photo No. 079	Vehicle at 180 Degrees on Static Rollover Device	A-40
Photo No. 080	Vehicle at 270 Degrees on Static Rollover Device	A-40
Photo No. 081	Vehicle at 360 Degrees on Static Rollover Device	A-41
Photo No. 082	2021 Chevrolet Trailblazer AWD LT 5-Door SUV Frontal Impact Event	A-41
Photo No. 083	Monroney Label Photograph	A-42

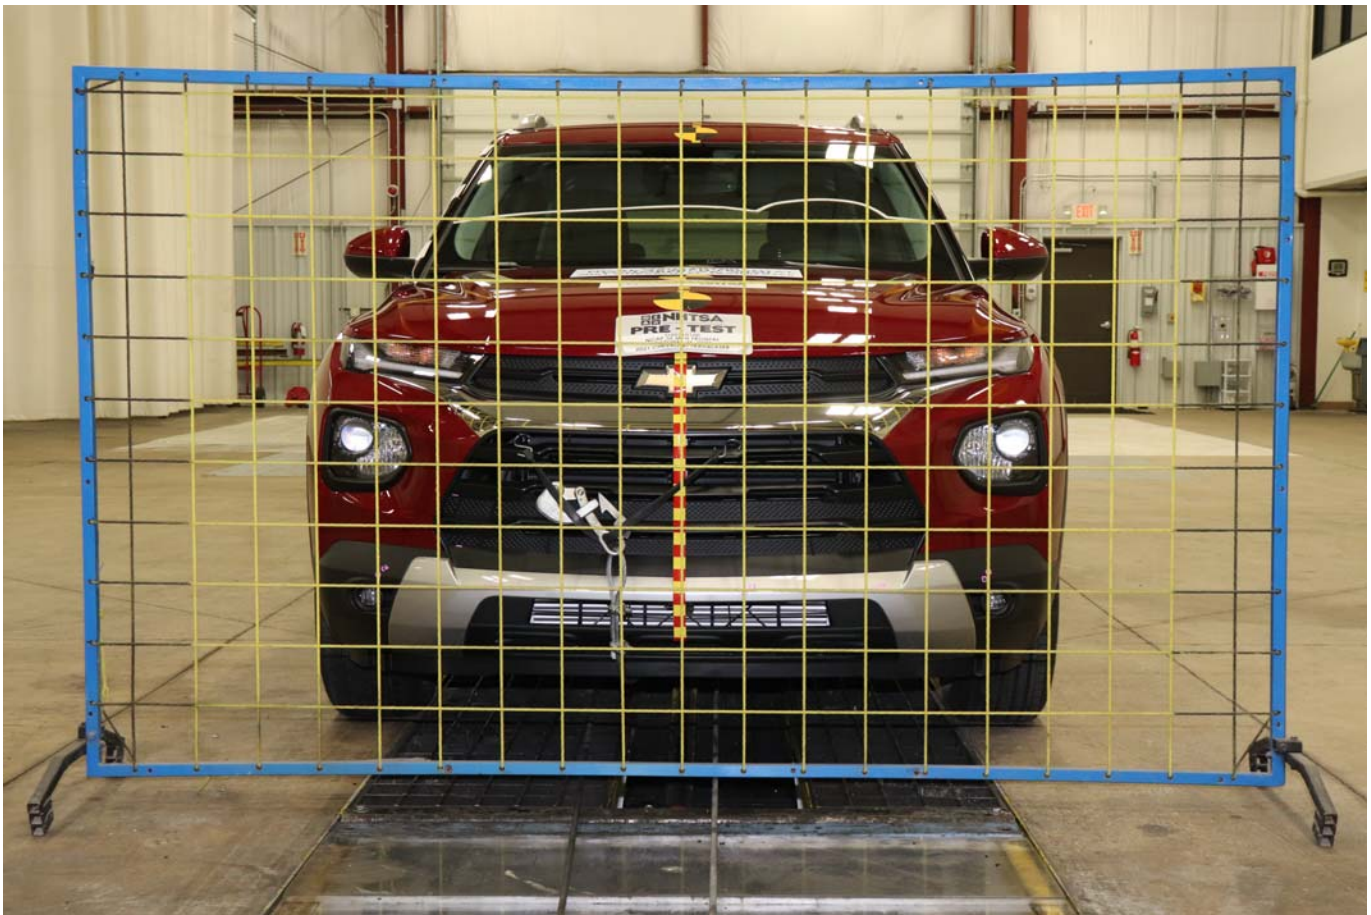


Photo No. 001 - Load Cell Location

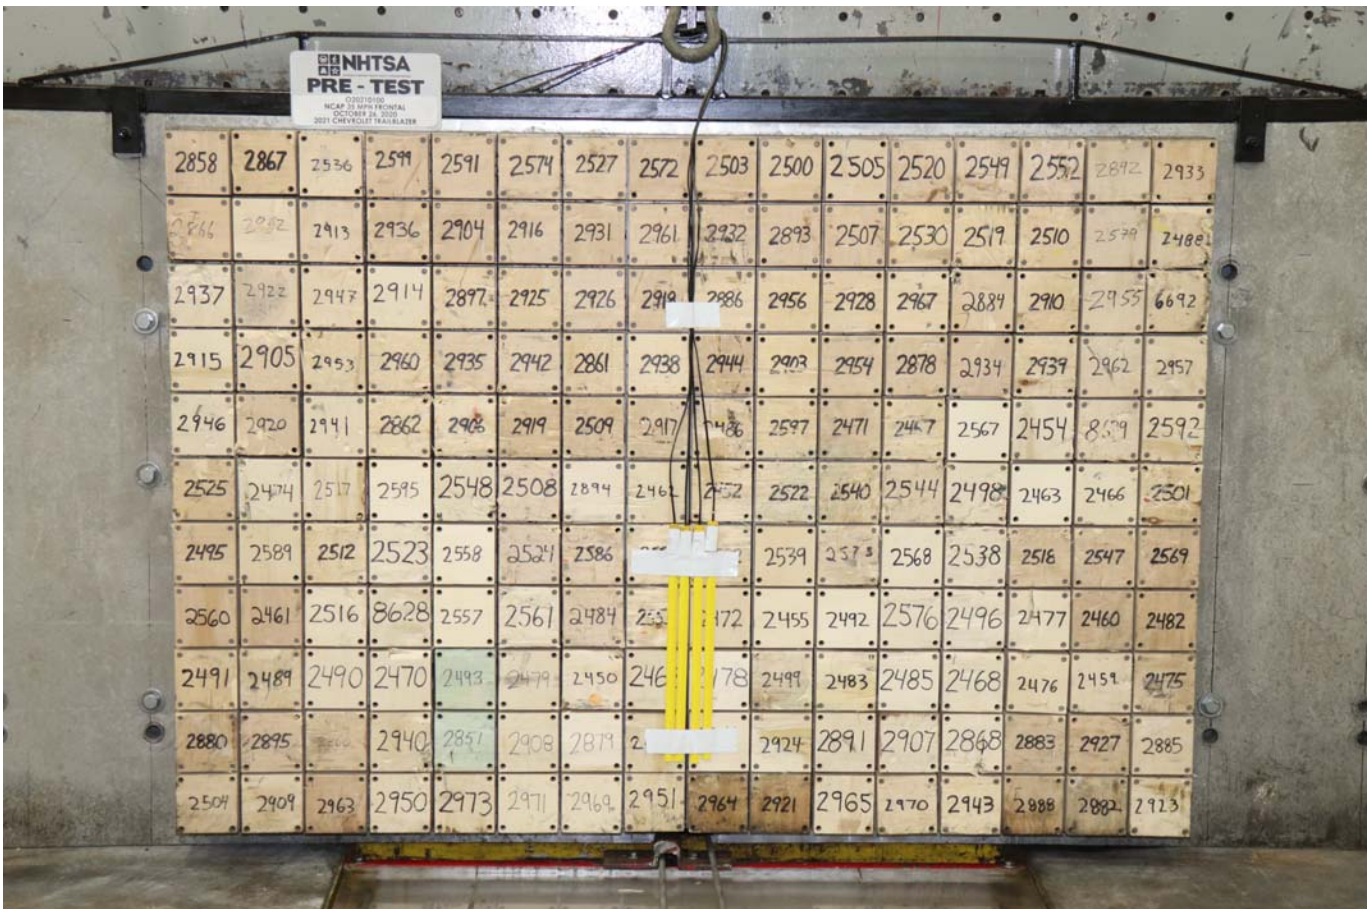


Photo No. 002 - Pre-Test Load Cell Wall



Photo No. 003 - Post-Test Load Cell Wall



Photo No. 004 - Manufacturer Label



Photo No. 005 - Tire Placard



Photo No. 006 - 2021 Chevrolet Trailblazer AWD LT 5-Door SUV Frontal As Delivered



Photo No. 007 - Left Rear 3-4 View, As Received



Photo No. 008 - Pre-Test Front View of Test Vehicle



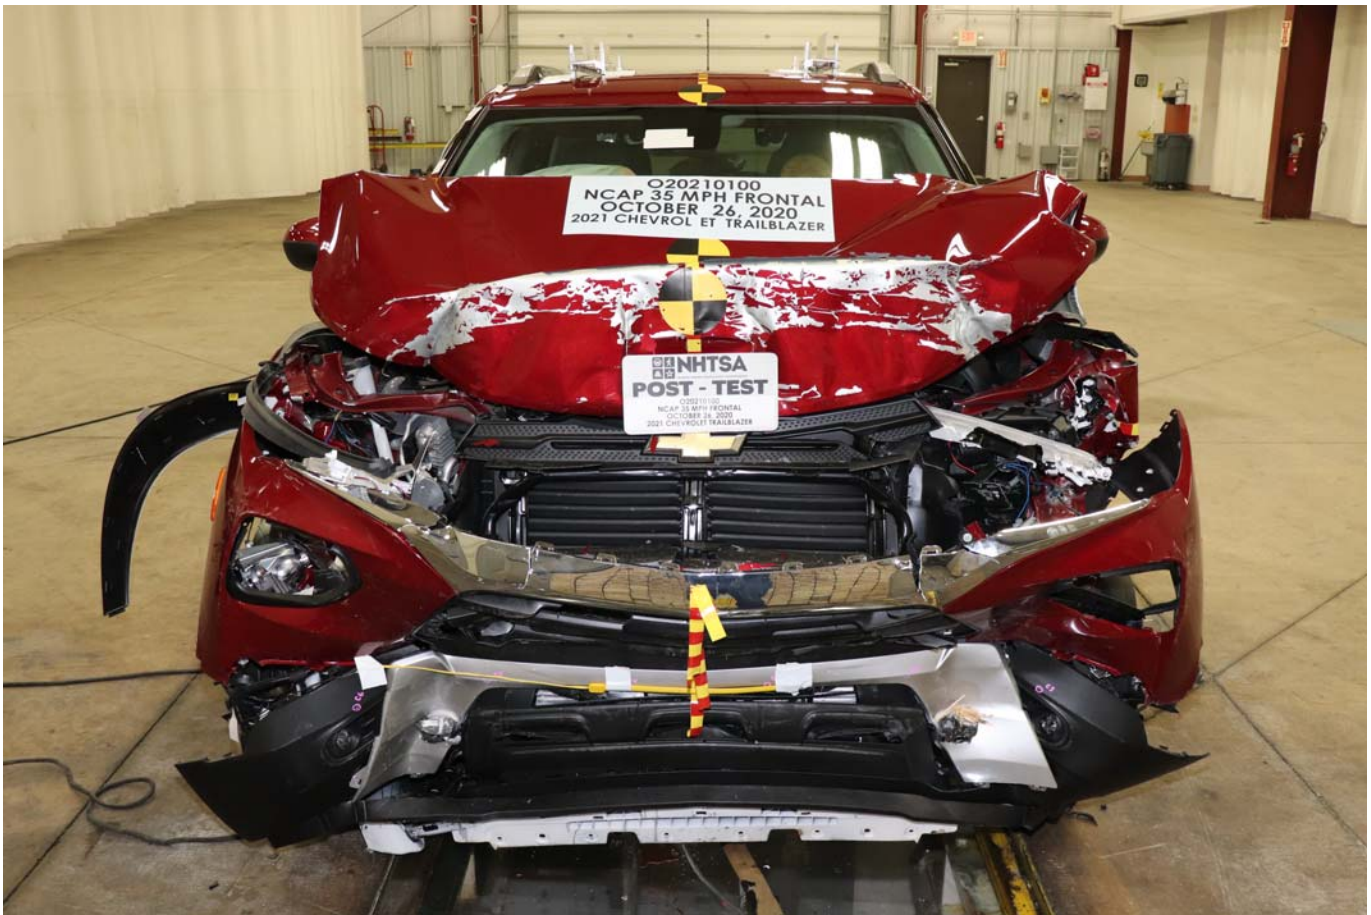


Photo No. 009 - Post-Test Front View of Test Vehicle



Photo No. 010 - Pre-Test Left View of Test Vehicle



Photo No. 011 - Post-Test Left View of Test Vehicle

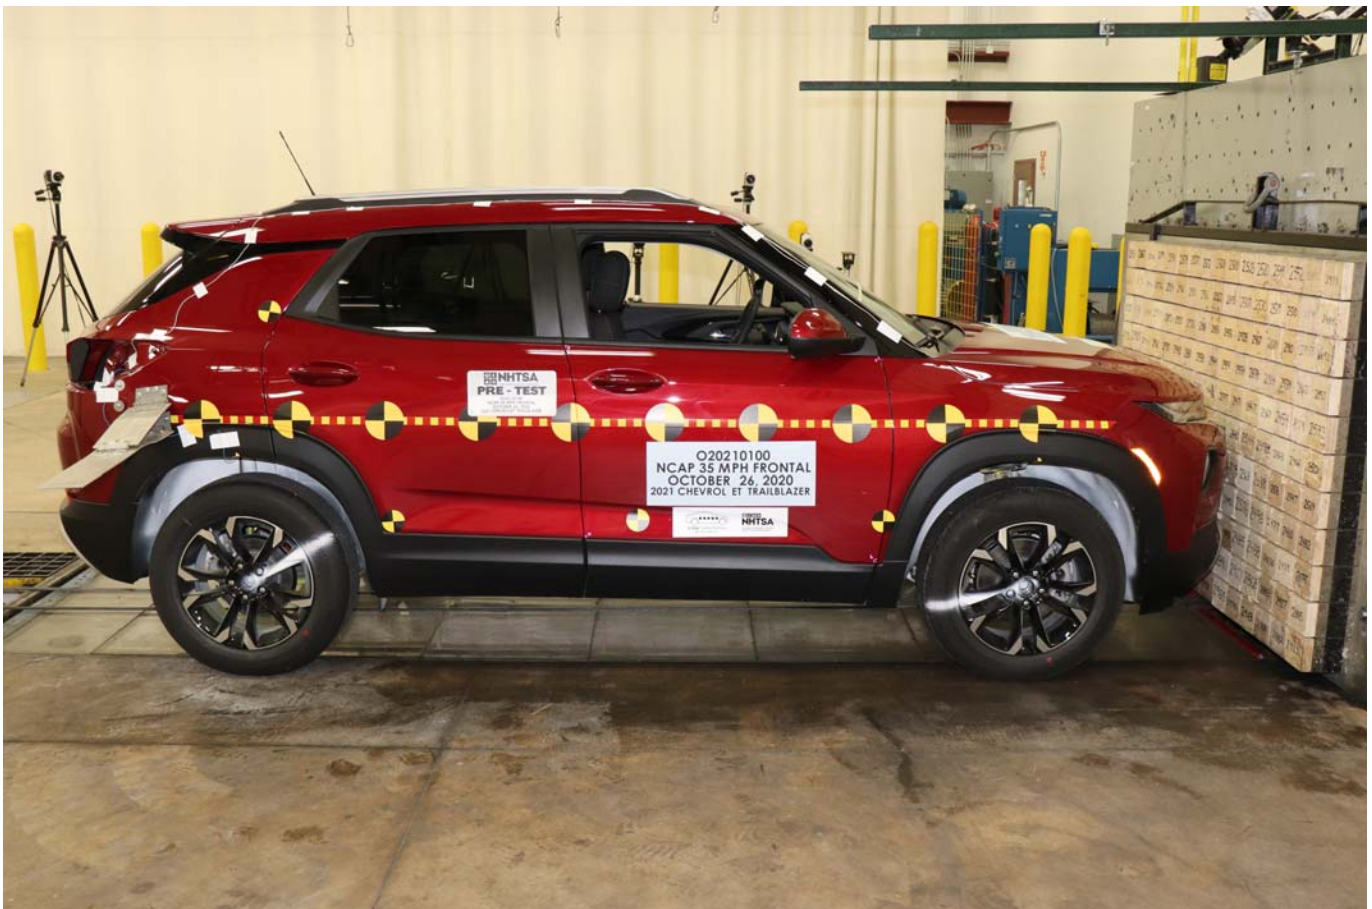


Photo No. 012 - Pre-Test Right View of Test Vehicle



Photo No. 013 - Post-Test Right View of Test Vehicle



Photo No. 014 - Pre-Test Right Front 3-4 View

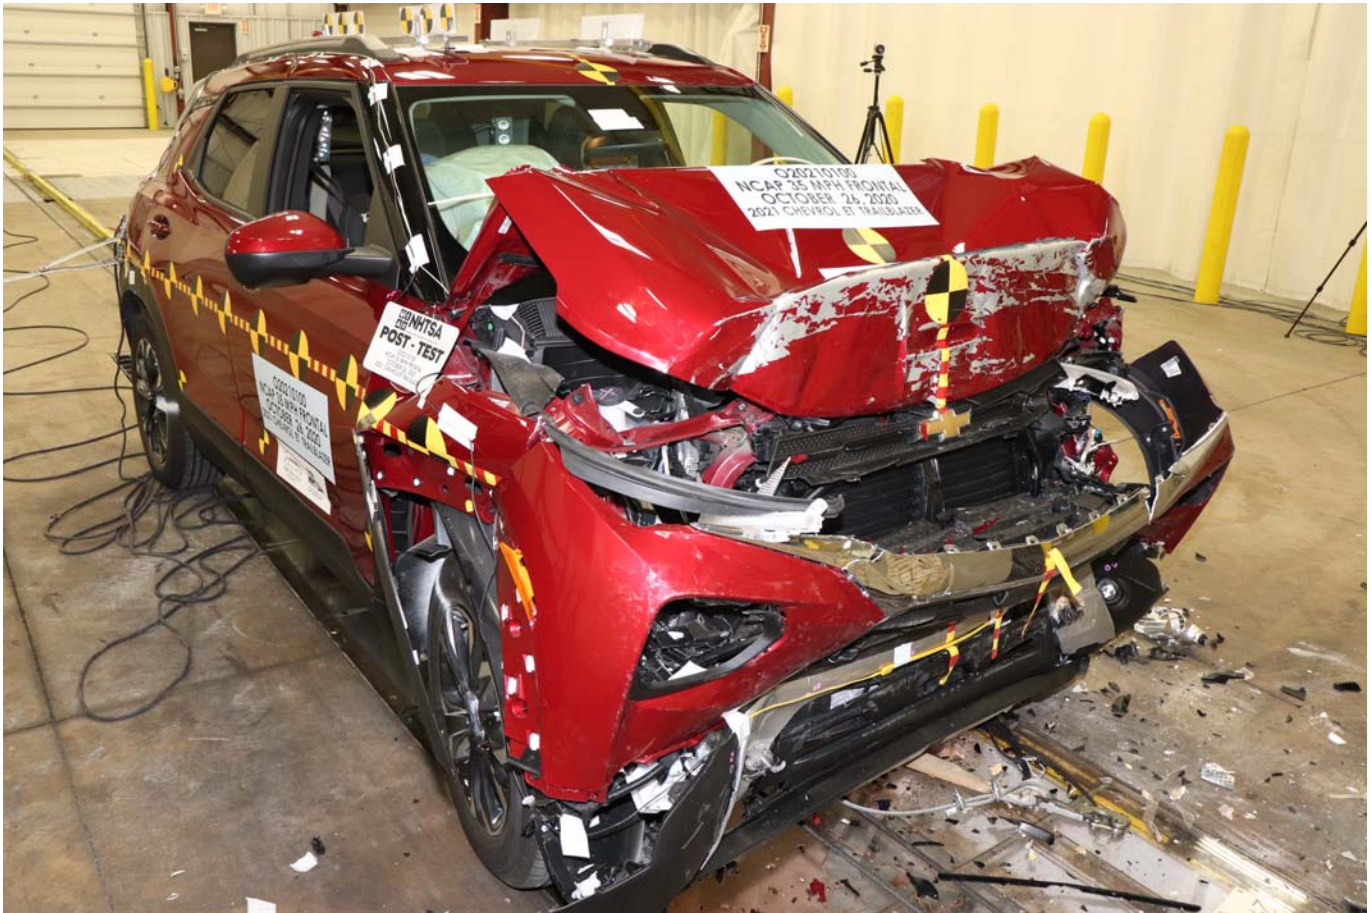


Photo No. 015 - Post-Test Right Front 3-4 View



Photo No. 016 - Pre-Test Left Rear 3-4 View



Photo No. 017 - Post-Test Left Rear 3-4 View



Photo No. 018 - Pre-Test Windshield View

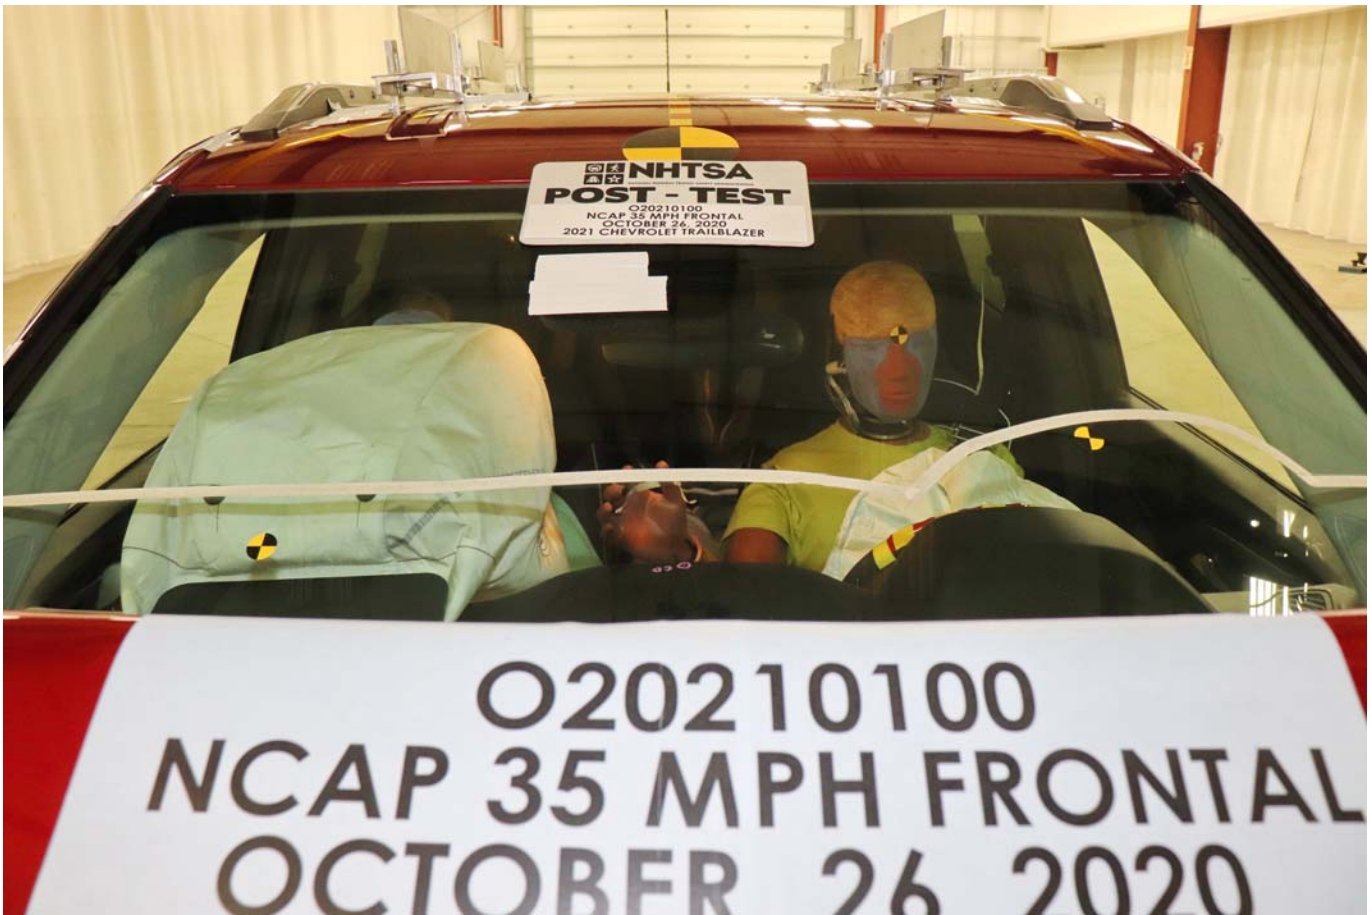


Photo No. 019 - Post-Test Windshield View



Photo No. 020 - Pre-Test Engine Compartment View

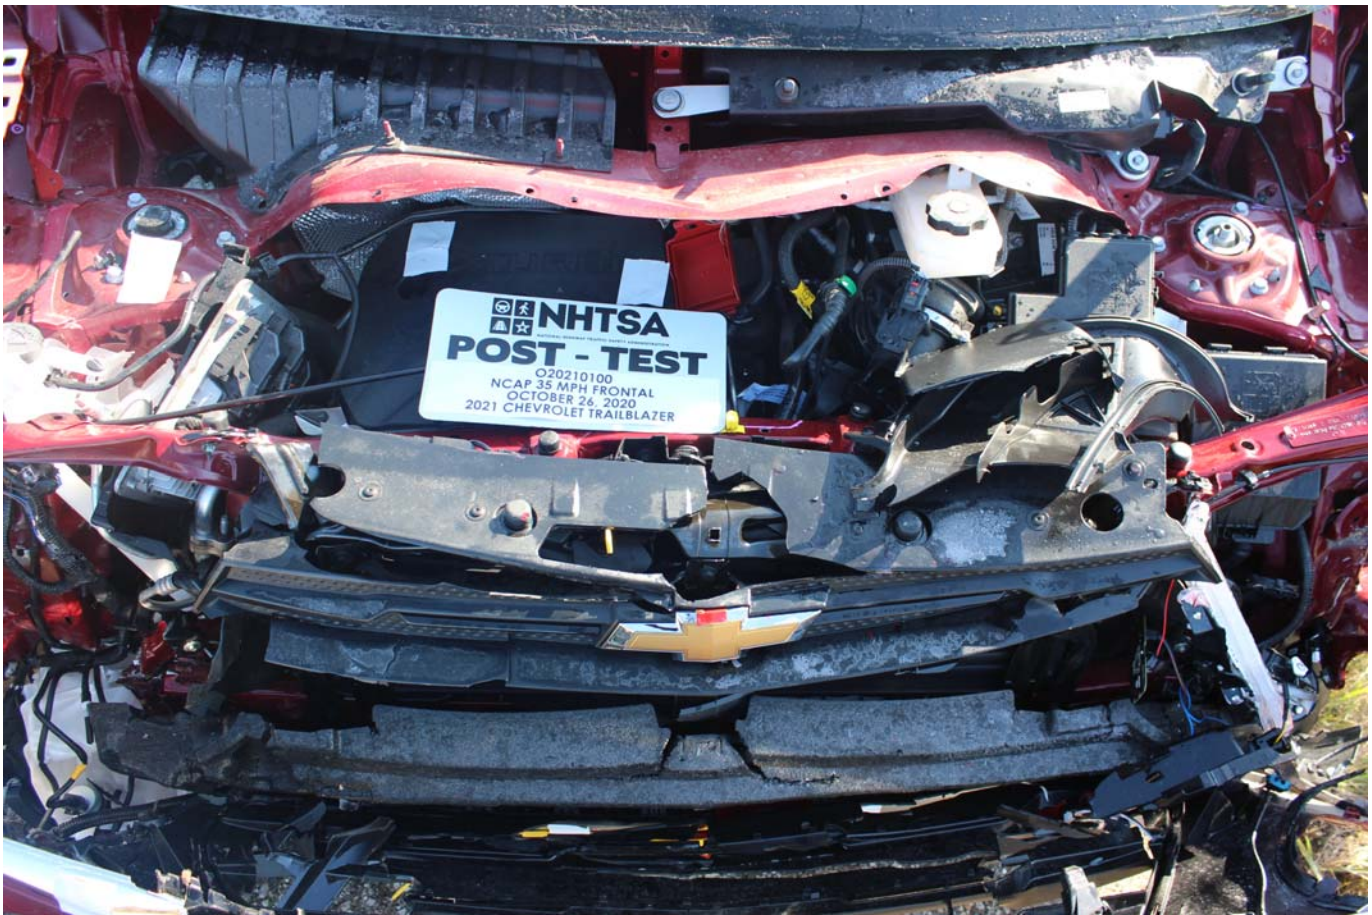


Photo No. 021 - Post-Test Engine Compartment View



Photo No. 022 - Pre-Test Fuel Filler Cap View



Photo No. 023 - Post-Test Fuel Filler Cap View

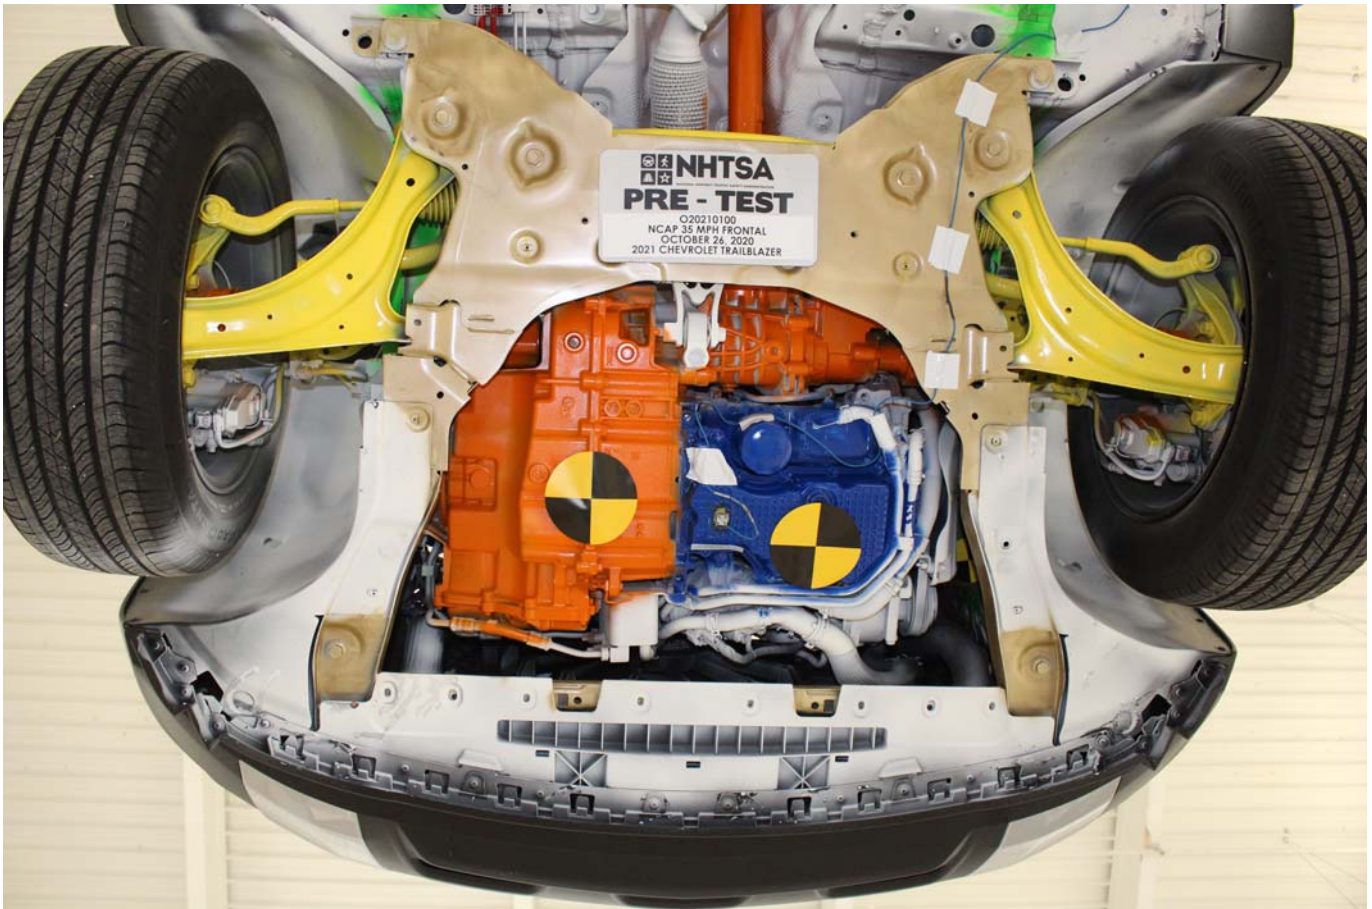


Photo No. 024 - Pre-Test Front Underbody View



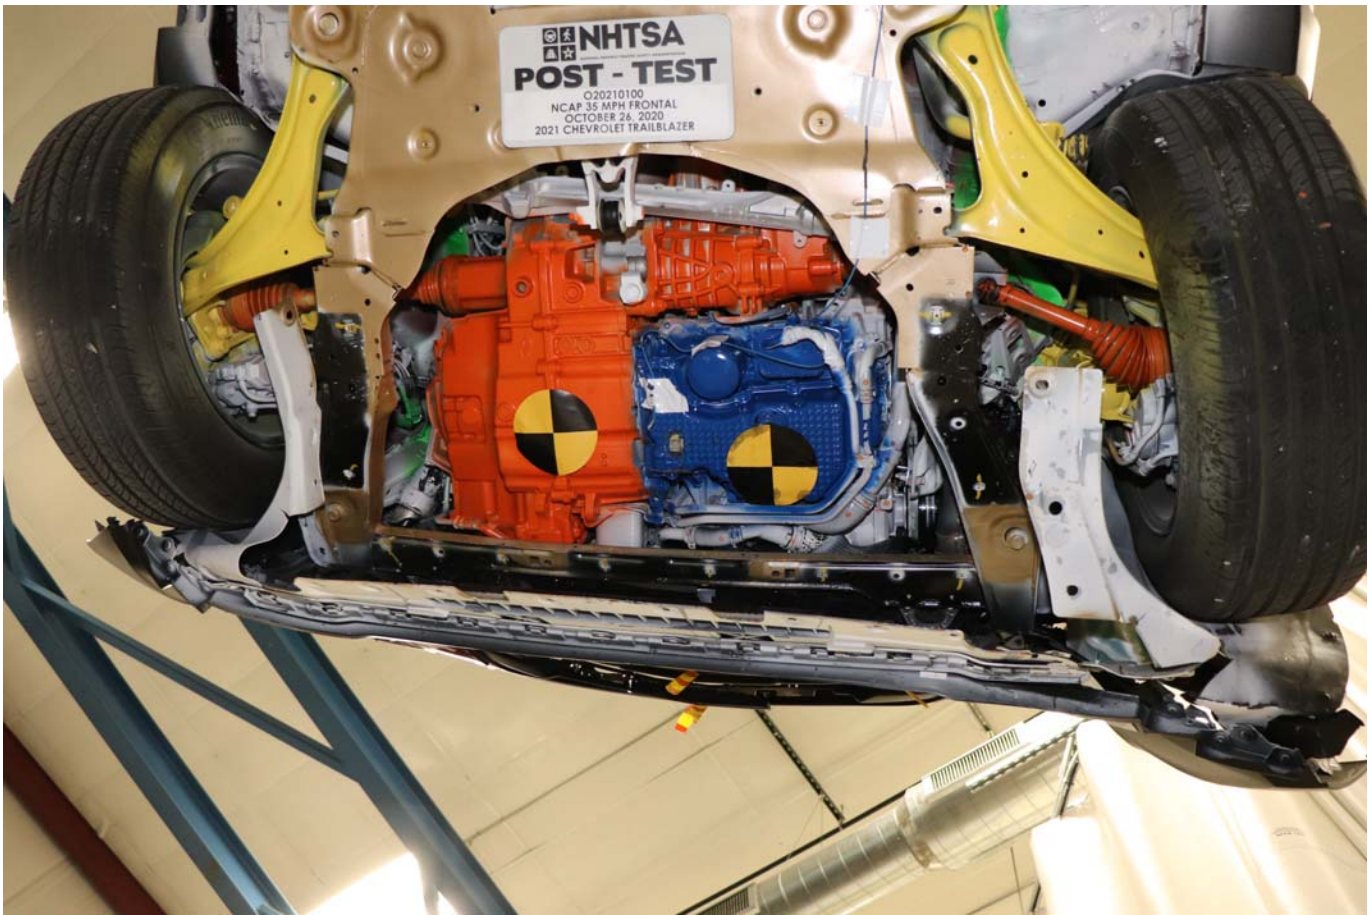


Photo No. 025 - Post-Test Front Underbody View



Photo No. 026 - Pre-Test Rear Underbody View



Photo No. 027 - Post-Test Rear Underbody View



Photo No. 028 - Pre-Test Dummy Cable Routing



Photo No. 029 - Post-Test Dummy Cable Routing



Photo No. 030 - Pre-Test Driver Dummy Front View



Photo No. 031 - Post-Test Driver Dummy Front View



Photo No. 032 - Pre-Test Driver Dummy Window View



Photo No. 033 - Post-Test Driver Dummy Window View



Photo No. 034 - Pre-Test Driver Dummy and Vehicle Interior



Photo No. 035 - Post-Test Driver Dummy and Vehicle Interior



Photo No. 036 - Pre-Test Driver Seat Fore-Aft Markings



Photo No. 037 - Post-Test Driver Seat Fore-Aft Markings



Photo No. 038 - Pre-Test View of Belt Anchorage for Driver Dummy



Photo No. 039 - Post-Test View of Belt Anchorage for Driver Dummy



Photo No. 040 - Pre-Test View of Belt Buckle and Latch Plate for Driver Dummy





Photo No. 041 - Post-Test View of Belt Buckle and Latch Plate for Driver Dummy



Photo No. 042 - Pre-Test Driver Dummy Feet



Photo No. 043 - Post-Test Driver Dummy Feet



Photo No. 044 - Pre-Test Driver Side Knee Bolster

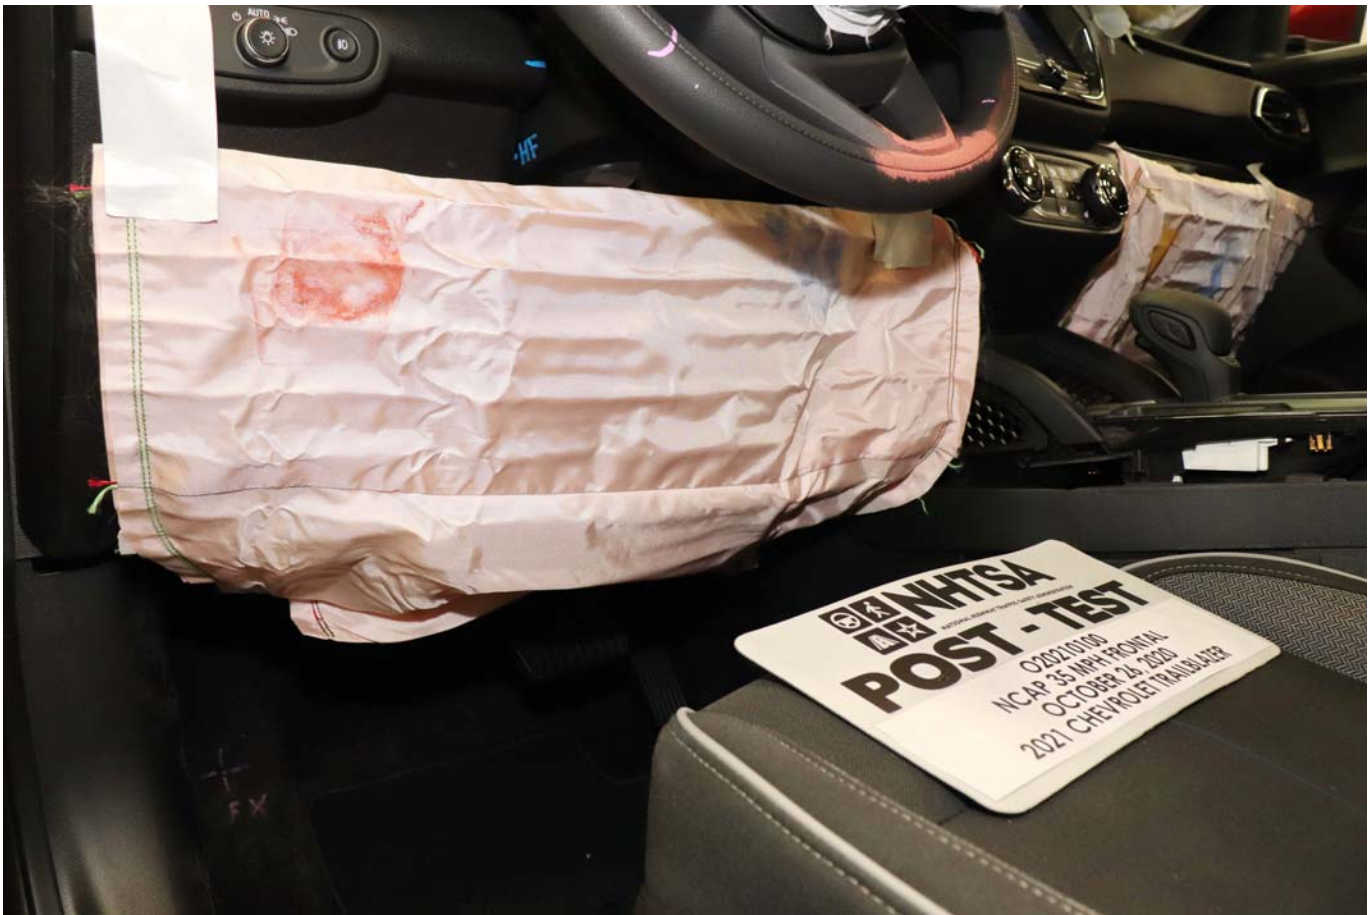


Photo No. 045 - Post-Test Driver Side Knee Bolster



Photo No. 046 - Pre-Test Driver Side Floorpan



Photo No. 047 - Post-Test Driver Side Floorpan



Photo No. 048 - Post-Test Driver Dummy Face



Photo No. 049 - Post-Test Driver Dummy Contact with Airbag



Photo No. 050 - Post-Test Driver Dummy Contact with Headrest



Photo No. 051 - Pre-Test View of the Steering Wheel



Photo No. 052 - Post-Test View of the Steering Wheel



Photo No. 053 - Pre-Test Passenger Dummy Front View



Photo No. 054 - Post-Test Passenger Dummy Front View



Photo No. 055 - Pre-Test Passenger Dummy Window View



Photo No. 056 - Post-Test Passenger Dummy Window View





Photo No. 057 - Pre-Test Passenger Dummy and Vehicle Interior



Photo No. 058 - Post-Test Passenger Dummy and Vehicle Interior



Photo No. 059 - Pre-Test Passenger Seat Fore-Aft Markings

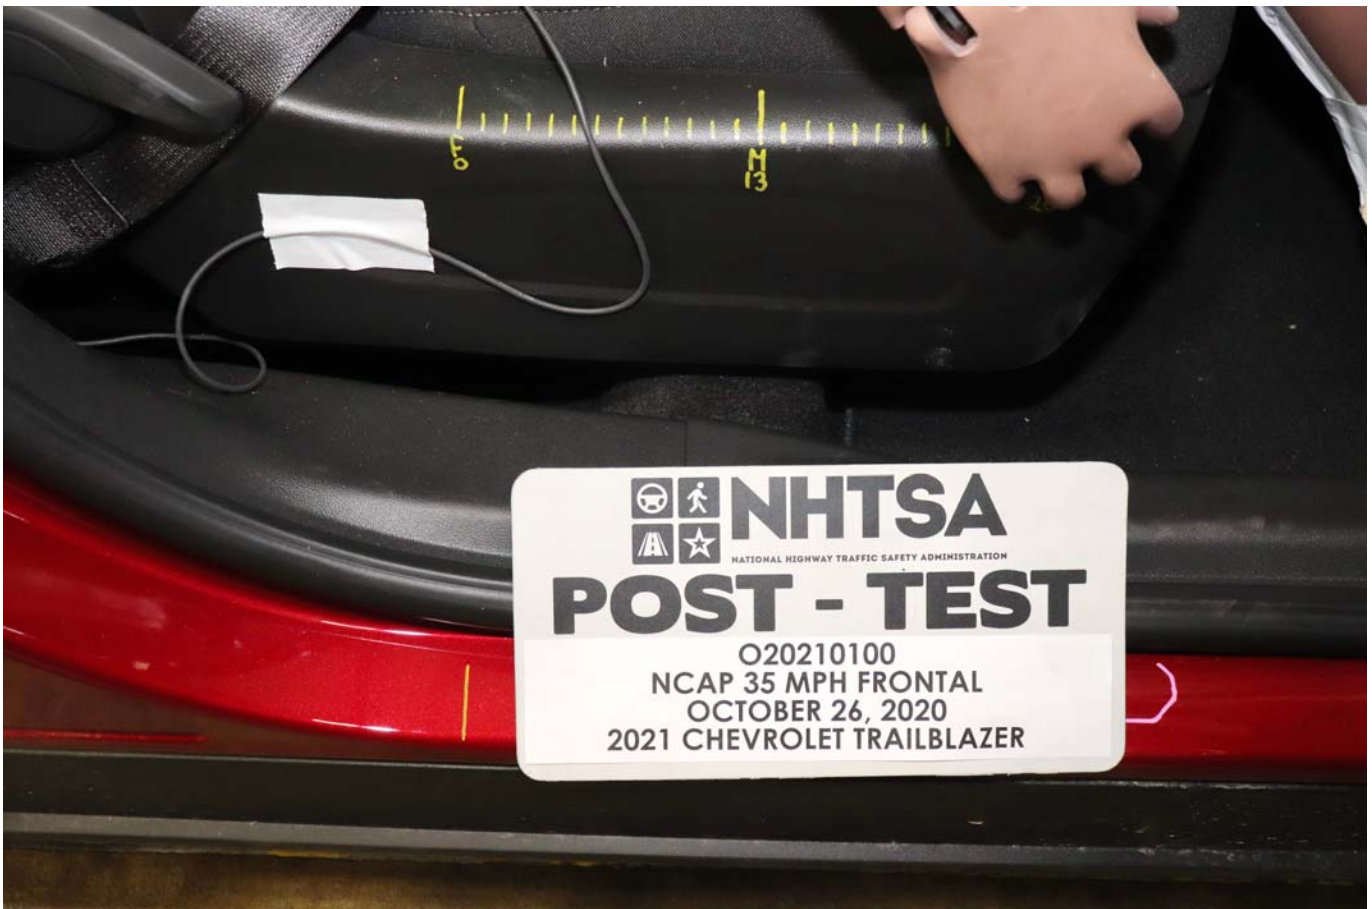


Photo No. 060 - Post-Test Passenger Seat Fore-Aft Markings



Photo No. 061 - Pre-Test View of Belt Anchorage for Passenger Dummy



Photo No. 062 - Post-Test View of Belt Anchorage for Passenger Dummy



Photo No. 063 - Pre-Test View of Belt Buckle and Latch Plate for Passenger Dummy



Photo No. 064 - Post-Test View of Belt Buckle and Latch Plate for Passenger Dummy



Photo No. 065 - Pre-Test Passenger Dummy Feet



Photo No. 066 - Post-Test Passenger Dummy Feet



Photo No. 067 - Pre-Test Passenger Side Knee Bolster



Photo No. 068 - Post-Test Passenger Side Knee Bolster



Photo No. 069 - Pre-Test Passenger Side Floorpan



Photo No. 070 - Post-Test Passenger Side Floorpan

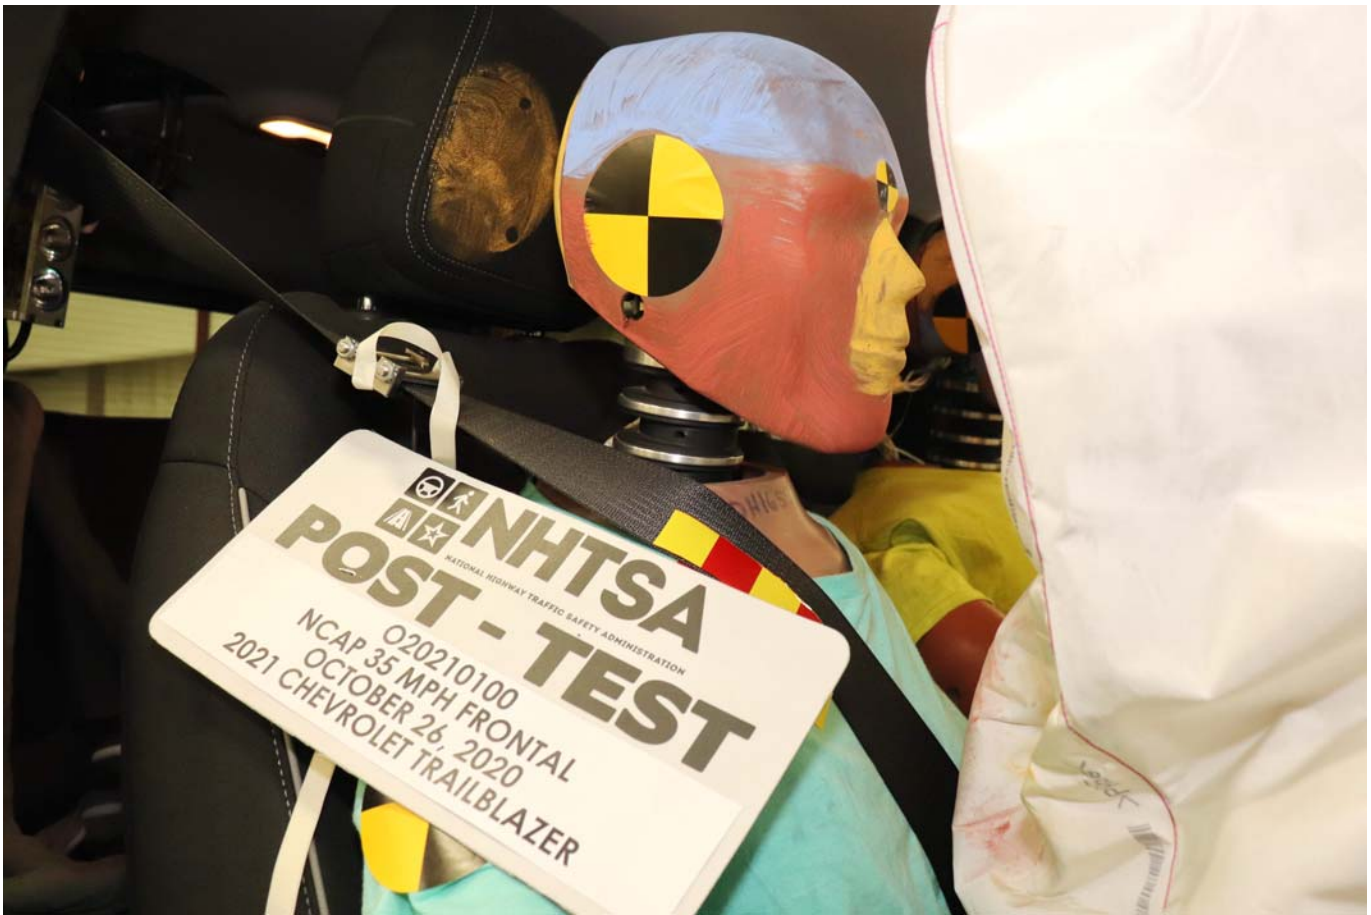


Photo No. 071 - Post-Test Passenger Dummy Face



Photo No. 072 - Post-Test Passenger Dummy Contact with Airbag





Photo No. 073 - Post-Test Passenger Dummy Contact with Headrest



Photo No. 074 - Ballast Installed in Vehicle

# PHOTOGRAPH NOT APPLICABLE

Photo No. 075 - Post-Test Stoddard Solvent Spillage Location View



Photo No. 076 - Post-Test Speed Trap Read-Out



Photo No. 077 - Vehicle at 0 Degrees on Static Rollover Device



Photo No. 078 - Vehicle at 90 Degrees on Static Rollover Device



Photo No. 079 - Vehicle at 180 Degrees on Static Rollover Device



Photo No. 080 - Vehicle at 270 Degrees on Static Rollover Device



Photo No. 081 - Vehicle at 360 Degrees on Static Rollover Device



Photo No. 082 - 2021 Chevrolet Trailblazer AWD LT 5-Door SUV Frontal Impact Event



**2021 TRAILBLAZER AWD LT**

**EXTERIOR: SCARLET RED METALLIC  
INTERIOR: JET BLACK**

**ECOTEC 1.3L TURBO  
TRANSMISSION, 9-SPD AUTOMATIC**

**STANDARD EQUIPMENT**

ITEMS FEATURED BELOW ARE INCLUDED AT NO EXTRA CHARGE IN THE STANDARD VEHICLE PRICE SHOWN.

**OWNER BENEFITS**

- 3 YEAR/36,000 MILE\* BUMPER-TO-BUMPER LIMITED WARRANTY
- 5 YEAR/60,000 MILE\* POWERTRAIN LIMITED WARRANTY, ROADSIDE ASSISTANCE & COURTESY TRANSPORTATION
- FIRST MAINTENANCE VISIT
- \*WHICHEVER COMES FIRST SEE CHEVROLET.COM OR DEALER FOR TERMS, DETAILS & LIMITS

**PERFORMANCE & MECHANICAL**

- ENGINE CONTROL, STOP-START SYSTEM W/ OVERRIDE
- BRAKES, FRONT & REAR ELECTRIC
- ENGINE AIR FILTRATION MONITOR
- TRAILERING EQUIPMENT

**CONNECTIVITY & TECHNOLOGY**

- CHEVROLET INFOTAINMENT 3 7" DIAG COLOR TOUCHSCREEN
- ADDITIONAL FEATURES FOR COMPATIBLE PHONES INCLUDE: BLUETOOTH AUDIO STREAMING VOICE COMMAND PASSTHROUGH TO PHONE, ANDROID AUTO AND APPLE CARPLAY CAPABLE
- DRIVER INFORMATION CENTER
- FRONT A & C USB PORTS & AUX INPUT
- KEYLESS OPEN / KEYLESS START
- ONSTAR (R) SERVICES & 4G LTE WI-FI (R) AVAILABLE; SEE ONSTAR.COM FOR TERMS

**INTERIOR**

- SEAT, REAR 40/60 SPLIT-BENCH, FOLDING
- SEAT ADJUSTER, DRIVER 10-WAY POWER INCLUDING LUMBAR CONTROL

- SEAT ADJUSTER, FRONT PASSENGER 4-WAY MANUAL
- POWER WINDOW, DRIVER W/ EXPRESS UP/DOWN
- POWER WINDOWS, FRONT PASS & REAR EXPRESS DOWN
- SEATBACK, FRONT PASSENGER FLAT FOLDING

**EXTERIOR**

- WHEELS, 17" HIGH GLOSS BLACK MACHINED ALUMINUM
- ROOF RACK, SIDE RAILS
- GLASS, DEEP TINTED
- MIRRORS, OUTSIDE HEATED POWER ADJUSTABLE, MANUAL-FOLDING
- FRONT FOG LAMPS, LED
- DAYTIME RUNNING LAMPS, SIGNATURE LED

**SAFETY & SECURITY**

- CHEVY SAFETY ASSIST:
- \*AUTOMATIC EMERGENCY BRAKING
- \*FRONT PEDESTRIAN BRAKING

- \*LANE KEEP ASSIST W/ LANE DEPARTURE WARNING
- \*FORWARD COLLISION ALERT
- \*INTELLIBEAM, AUTO HIGH BEAM
- \*FOLLOWING DISTANCE INDICATOR
- TIRE FILL ALERT
- TIRE PRESSURE MONITOR SYSTEM
- TEEN DRIVER
- REAR VISION CAMERA

MANUFACTURER'S SUGGESTED RETAIL PRICE

**STANDARD VEHICLE PRICE \$25,600.00**

**OPTIONS & PRICING**

OPTIONS INSTALLED BY THE MANUFACTURER (MAY REPLACE STANDARD EQUIPMENT SHOWN)

CONVENIENCE PACKAGE: 620.00

- AIR CONDITIONING, SINGLE ZONE AUTOMATIC
- INSIDE REARVIEW MIRROR, AUTO DIMMING
- VISORS, DRIVER AND FRONT

Visit us at [www.chevy.com](http://www.chevy.com)

- PASSENGER ILLUMINATED VANITY MIRRORS, COVERED, SLIDING
- POWER OUTLET, 120-VOLT
- SIRIUSXM RADIO CAPABLE, ALL ACCESS TRIAL W/ SUBSCRIPTION SOLD SEPARATELY
- DISPLAY, 8" DIAGONAL COLOR TOUCHSCREEN
- REAR A & C USB CHARGE ONLY PORTS

DRIVER CONFIDENCE PACKAGE: 345.00

- REAR PARK ASSIST
- REAR CROSS TRAFFIC ALERT
- LANE CHANGE ALERT WITH SIDE BLIND ZONE ALERT

TOTAL OPTIONS \$965.00

TOTAL VEHICLE & OPTIONS \$26,565.00

DESTINATION CHARGE 995.00

**TOTAL VEHICLE PRICE\* \$27,560.00**

**EPA DOT Fuel Economy and Environment Gasoline Vehicle**

**Fuel Economy**

**28** MPG combined city/hwy

26 city 30 highway

3.6 gallons per 100 miles

Small SUVs range from 16 to 120 MPG. The best vehicle rates 141 MPG.

**You save \$250** in fuel costs over 5 years compared to the average new vehicle.

**Annual fuel COST \$1,450**

**Fuel Economy & Greenhouse Gas Rating (tailpipe only)** 6

**Smog Rating (tailpipe only)** 7

This vehicle emits 314 grams CO<sub>2</sub> per mile. The best emits 0 grams per mile (tailpipe only). Producing and distributing fuel also create emissions, learn more at [fuelconomy.gov](http://fuelconomy.gov).

Actual results will vary for many reasons, including driving conditions and how you drive and maintain your vehicle. The average new vehicle gets 27 MPG and costs \$7,400 to fuel over 5 years. Cost estimates are based on 15,000 miles per year at \$2.70 per gallon. MPG is miles per gasoline gallon equivalent. Vehicle emissions are a significant cause of climate change and smog.

**fuelconomy.gov**

Calculate personalized estimates and compare vehicles

**GOVERNMENT 5-STAR SAFETY RATINGS**

**Overall Vehicle Score To Be Rated**

Based on the combined ratings of frontal, side and rollover. Should ONLY be compared to other vehicles of similar size and weight.

<b>Frontal Crash</b>	Driver Passenger	To Be Rated To Be Rated
----------------------	------------------	-------------------------

Based on the risk of injury in a frontal impact. Should ONLY be compared to other vehicles of similar size and weight.

<b>Side Crash</b>	Front seat Rear seat	To Be Rated To Be Rated
-------------------	----------------------	-------------------------

Based on the risk of injury in a side impact.

**Rollover** ★★★★★

Based on the risk of rollover in a single-vehicle crash.

Star ratings range from 1 to 5 stars (★★★★★) with 5 being the highest. Source: National Highway Traffic Safety Administration (NHTSA) [www.safercar.gov](http://www.safercar.gov) or 1-888-327-4236

ORDER NO. XWVCHD SALES CODE E  
SALES MODEL CODE 1T106  
DEALER NO. 47044  
FINAL ASSEMBLY: BUPYEONG GU, IN KOREA C20080017001  
VIN KL79MRSL2MB047092  
DEALER TO WHOM DELIVERED: BOUCHER CHEVROLET, INC. 1421 E MORELAND BLVD WAUKESHA, WI 53186-3960

**PARTS CONTENT INFORMATION**

This label has been applied pursuant to Federal law - Do not remove prior to delivery to the ultimate purchaser. Includes Manufacturer's Recommended Pre-Delivery Service. Does not include dealer installed options and accessories not listed above, local taxes or license fees.

**FOR VEHICLES IN THIS CARLINE:**  
U.S./CANADIAN PARTS CONTENT: 3%  
MAJOR SOURCES OF FOREIGN PARTS CONTENT: KOREA 44% MEXICO 29%

NOTE: PARTS CONTENT DOES NOT INCLUDE FINAL ASSEMBLY, DISTRIBUTION, OR OTHER NON-PARTS COSTS.

**FOR THIS VEHICLE:**  
FINAL ASSEMBLY POINT: BUPYEONG GU, IN KOREA  
COUNTRY OF ORIGIN: ENGINE: MEXICO TRANSMISSION: MEXICO

© 2020 General Motors LLC  
GMILR1\_P1002\_0328 - 02/19/2019

Photo No. 083 - Monroney Label Photograph

**APPENDIX B**  
**DUMMY RESPONSE DATA TRACES**

## TABLE OF DATA PLOTS

Page No.

### List of Data Plots Provided in the Test Report

Figure No. 1.	Driver Head X Acceleration vs. Time	B-1
Figure No. 2.	Driver Head Y Acceleration vs. Time	B-1
Figure No. 3.	Driver Head Z Acceleration vs. Time	B-1
Figure No. 4.	Driver Head Resultant Acceleration vs. Time	B-1
Figure No. 5.	Driver Chest Displacement vs. Time	B-2
Figure No. 6.	Driver Chest X Acceleration vs. Time	B-3
Figure No. 7.	Driver Chest Y Acceleration vs. Time	B-3
Figure No. 8.	Driver Chest Z Acceleration vs. Time	B-3
Figure No. 9.	Driver Chest Resultant Acceleration vs. Time	B-3
Figure No. 10.	Driver Neck Force X vs. Time	B-4
Figure No. 11.	Driver Neck Force Z vs. Time	B-4
Figure No. 12.	Driver Neck Moment Y vs. Time	B-4
Figure No. 13.	Driver Nij (NTF) vs. Time	B-5
Figure No. 14.	Driver Nij (NTE) vs. Time	B-5
Figure No. 15.	Driver Nij (NCF) vs. Time	B-5
Figure No. 16.	Driver Nij (NCE) vs. Time	B-5
Figure No. 17.	Driver Left Femur Force vs. Time	B-6
Figure No. 18.	Driver Right Femur Force vs. Time	B-6
Figure No. 19.	Passenger Head X Acceleration vs. Time	B-7
Figure No. 20.	Passenger Head Y Acceleration vs. Time	B-7
Figure No. 21.	Passenger Head Z Acceleration vs. Time	B-7
Figure No. 22.	Passenger Head Resultant Acceleration vs. Time	B-7
Figure No. 23.	Passenger Chest Displacement vs. Time	B-8
Figure No. 24.	Passenger Chest X Acceleration vs. Time	B-9
Figure No. 25.	Passenger Chest Y Acceleration vs. Time	B-9
Figure No. 26.	Passenger Chest Z Acceleration vs. Time	B-9
Figure No. 27.	Passenger Chest Resultant Z Acceleration vs. Time	B-9



	<u>Page No.</u>
Figure No. 28. Passenger Neck Force X vs. Time	B-10
Figure No. 29. Passenger Neck Force Z vs. Time	B-10
Figure No. 30. Passenger Neck Moment Y vs. Time	B-10
Figure No. 31. Passenger Nij (NTF) vs. Time	B-11
Figure No. 32. Passenger Nij (NTE) vs. Time	B-11
Figure No. 33. Passenger Nij (NCF) vs. Time	B-11
Figure No. 34. Passenger Nij (NCE) vs. Time	B-11
Figure No. 35. Passenger Left Femur Force vs. Time	B-12
Figure No. 36. Passenger Right Femur Force vs. Time	B-12


**The following additional dummy and vehicle response data can be found in the R&D section of the NHTSA website at [www.nhtsa.gov](http://www.nhtsa.gov)**

Driver Head X Redundant  
 Driver Head Y Redundant  
 Driver Head Z Redundant  
 Driver Head Angular Velocity X  
 Driver Head Angular Velocity Y  
 Driver Head Angular Velocity Z  
 Driver Upper Neck Force Y  
 Driver Upper Neck Moment X  
 Driver Upper Neck Moment Z  
 Driver Chest X Redundant  
 Driver Chest Y Redundant  
 Driver Chest Z Redundant  
 Driver Pelvis X  
 Driver Pelvis Y  
 Driver Pelvis Z  
 Driver Left Femur Redundant  
 Driver Right Femur Redundant  
 Driver Left Upper Tibia Moment X  
 Driver Left Upper Tibia Moment Y


Driver Left Upper Tibia Force Z  
Driver Left Lower Tibia Moment X  
Driver Left Lower Tibia Moment Y  
Driver Left Lower Tibia Force Z  
Driver Right Upper Tibia Moment X  
Driver Right Upper Tibia Moment Y  
Driver Right Upper Tibia Force Z  
Driver Right Lower Tibia Moment X  
Driver Right Lower Tibia Moment Y  
Driver Right Lower Tibia Force Z  
Driver Left Foot Fore Z  
Driver Left Foot Aft X  
Driver Left Foot Aft Z  
Driver Right Foot Fore Z  
Driver Right Foot Aft X  
Driver Right Foot Aft Z  
Driver Lap Belt Force  
Driver Shoulder Belt Force  
Passenger Head X Redundant  
Passenger Head Y Redundant  
Passenger Head Z Redundant  
Passenger Head Angular Velocity X  
Passenger Head Angular Velocity Y  
Passenger Head Angular Velocity Z  
Passenger Upper Neck Force Y  
Passenger Upper Neck Moment X  
Passenger Upper Neck Moment Z  
Passenger Chest X Redundant  
Passenger Chest Y Redundant  
Passenger Chest Z Redundant  
Passenger Pelvis X  
Passenger Pelvis Y

Passenger Pelvis Z  
Passenger Left Femur Redundant  
Passenger Right Femur Redundant  
Passenger Left Upper Tibia Moment X  
Passenger Left Upper Tibia Moment Y  
Passenger Left Upper Tibia Force Z  
Passenger Left Lower Tibia Moment X  
Passenger Left Lower Tibia Moment Y  
Passenger Left Lower Tibia Force Z  
Passenger Right Upper Tibia Moment X  
Passenger Right Upper Tibia Moment Y  
Passenger Right Upper Tibia Force Z  
Passenger Right Lower Tibia Moment X  
Passenger Right Lower Tibia Moment Y  
Passenger Right Lower Tibia Force Z  
Passenger Left Foot Fore Z  
Passenger Left Foot Aft X  
Passenger Left Foot Aft Z  
Passenger Right Foot Fore Z  
Passenger Right Foot Aft X  
Passenger Right Foot Aft Z  
Passenger Lap Belt Force  
Passenger Shoulder Belt Force  
Left Rear Seat Crossmember X  
Right Rear Seat Crossmember X  
Vehicle Engine Top X  
Vehicle Engine Bottom X  
Left Rear Seat Crossmember Z  
Right Rear Seat Crossmember Z  
Left Rear Seat Crossmember Xr  
Right Rear Seat Crossmember Xr  
Advanced Research Load Cell Barrier – 528 channels


**DRIVER HEAD X (g) vs Time (ms)**

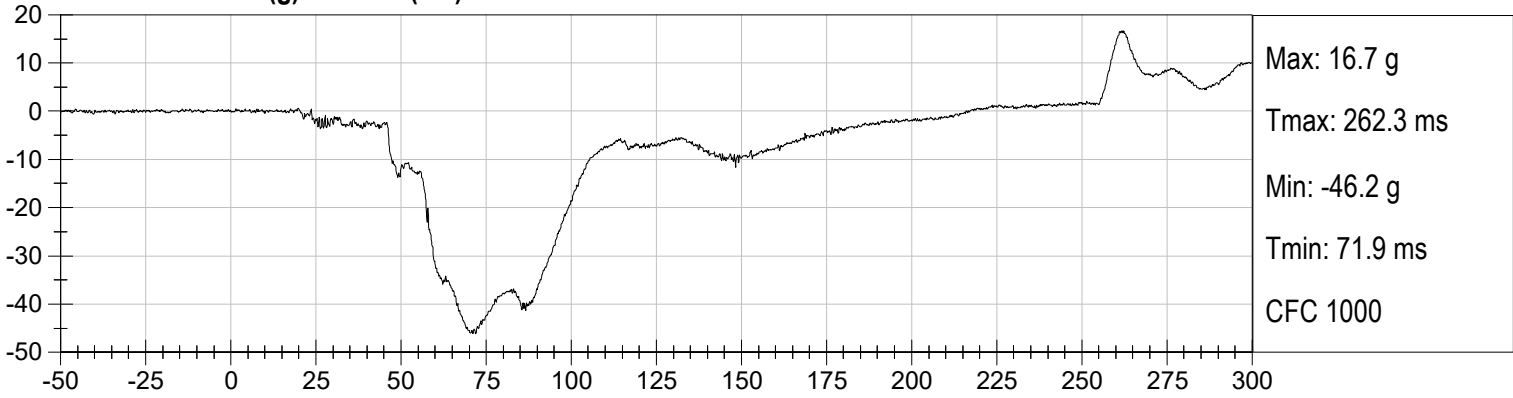


**DRIVER HEAD Y (g) vs Time (ms)**

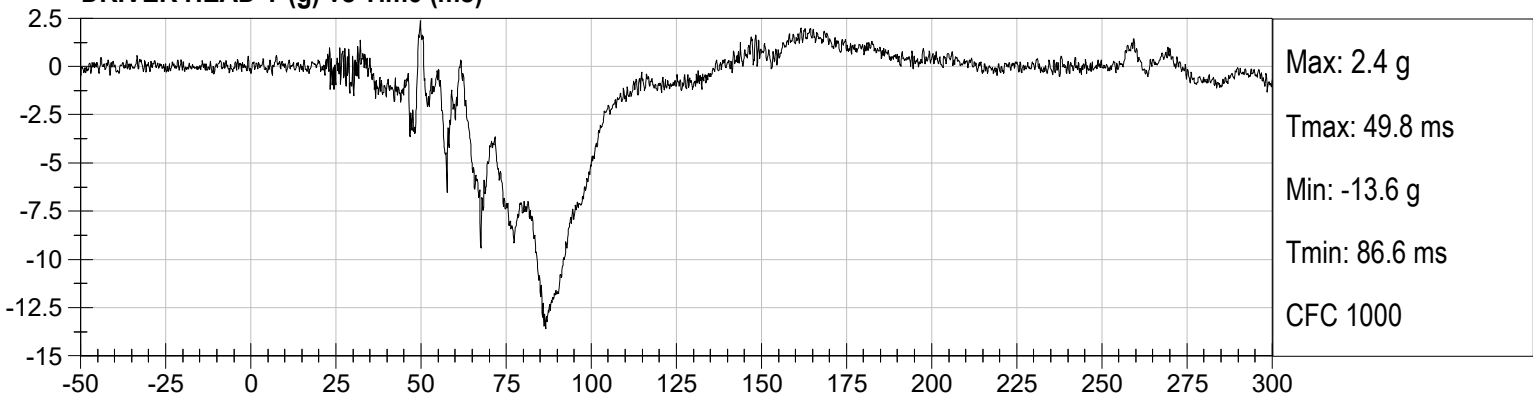


**DRIVER HEAD Z (g) vs Time (ms)**

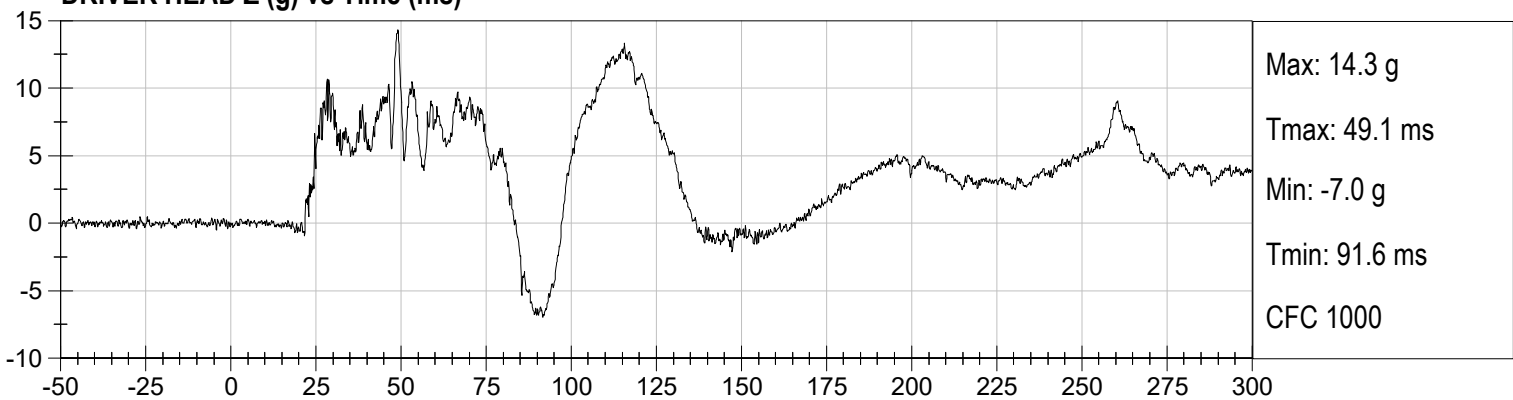


**DRIVER HEAD Resultant (g) vs Time (ms)**

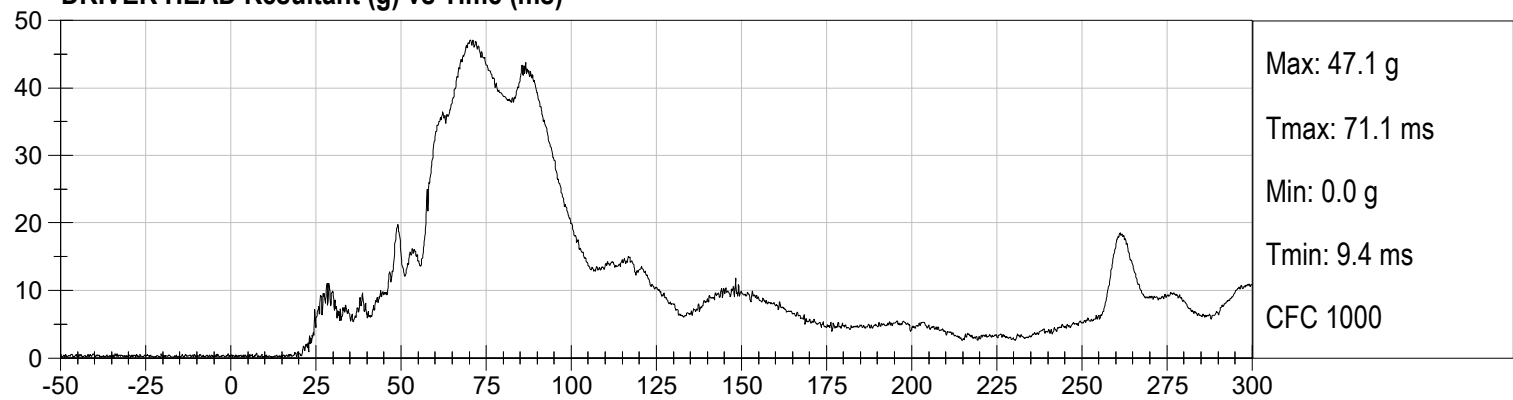


**DRIVER CHEST DISPLACEMENT (mm) vs Time (ms)**

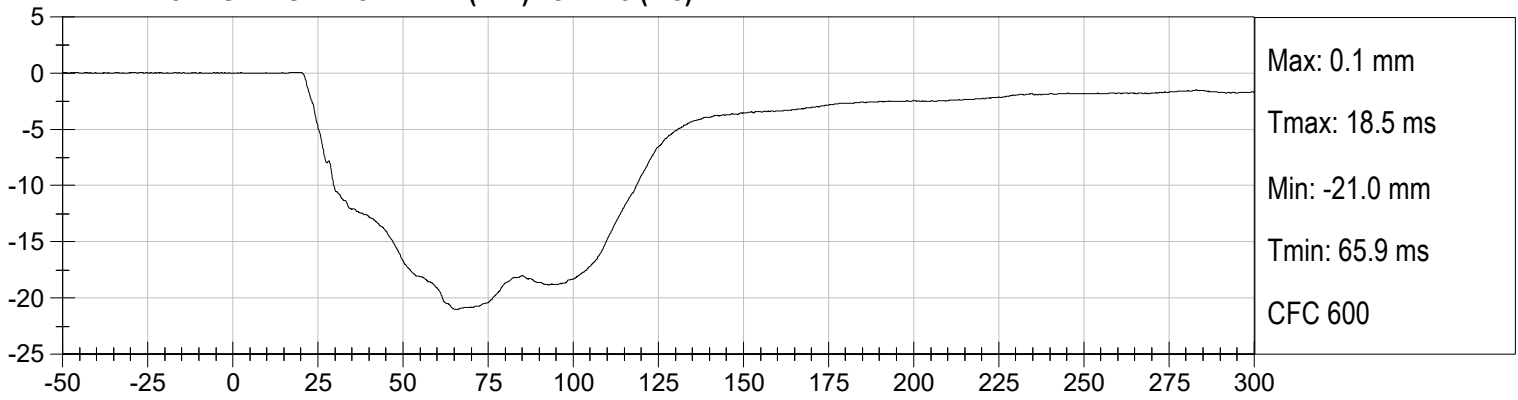

**DRIVER CHEST X (g) vs Time (ms)**

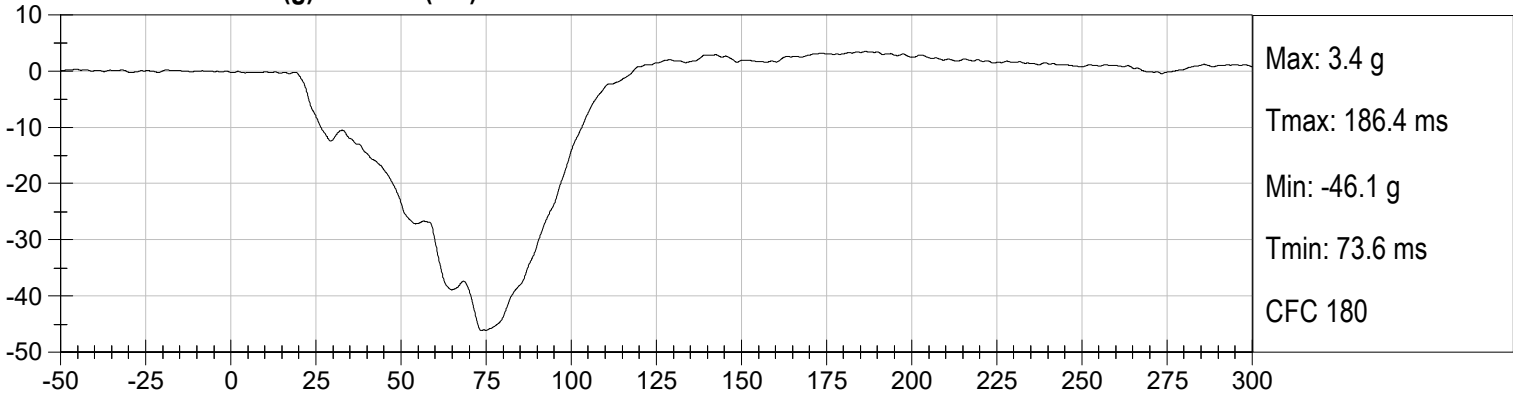


**DRIVER CHEST Y (g) vs Time (ms)**


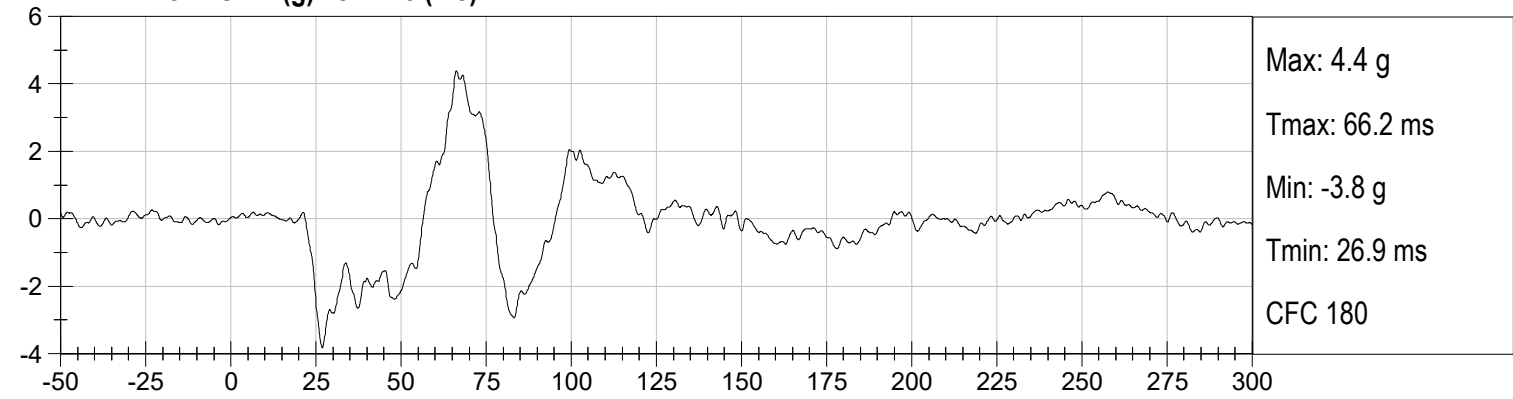


**DRIVER CHEST Z (g) vs Time (ms)**




**DRIVER CHEST Resultant (g) vs Time (ms)**

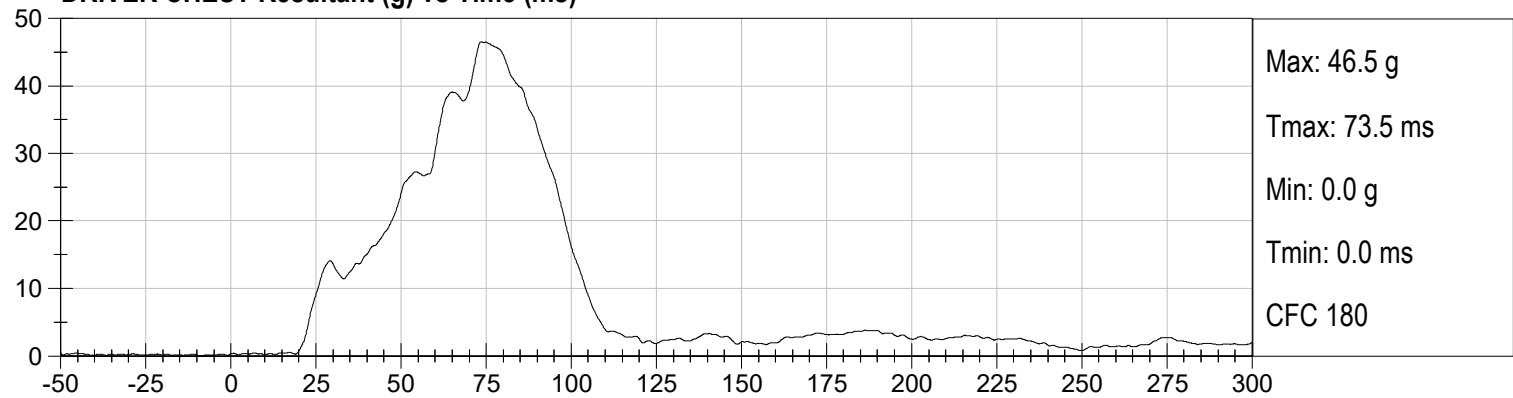


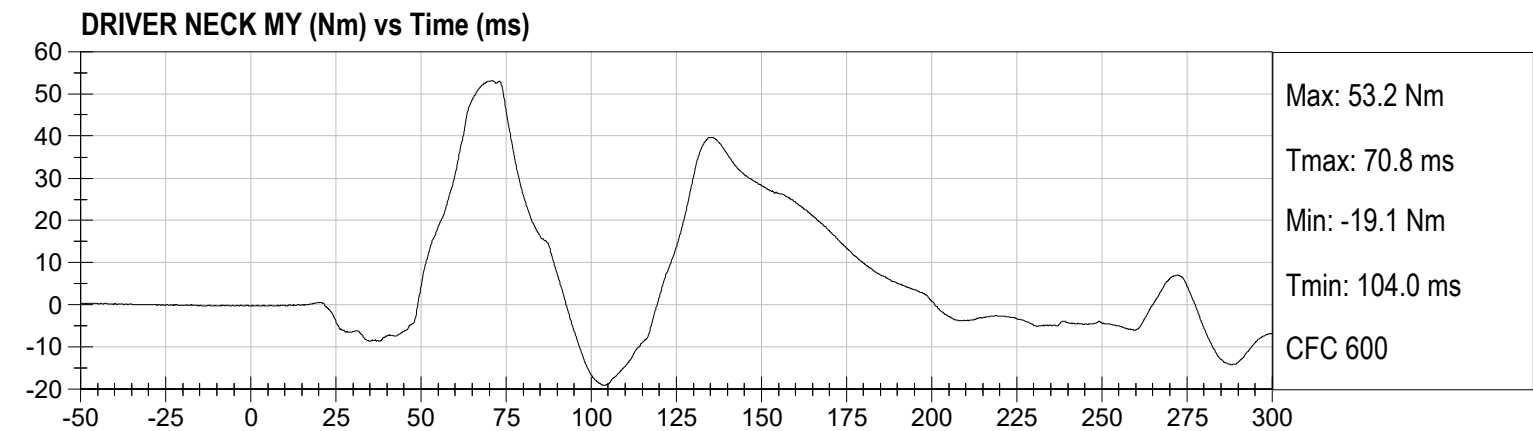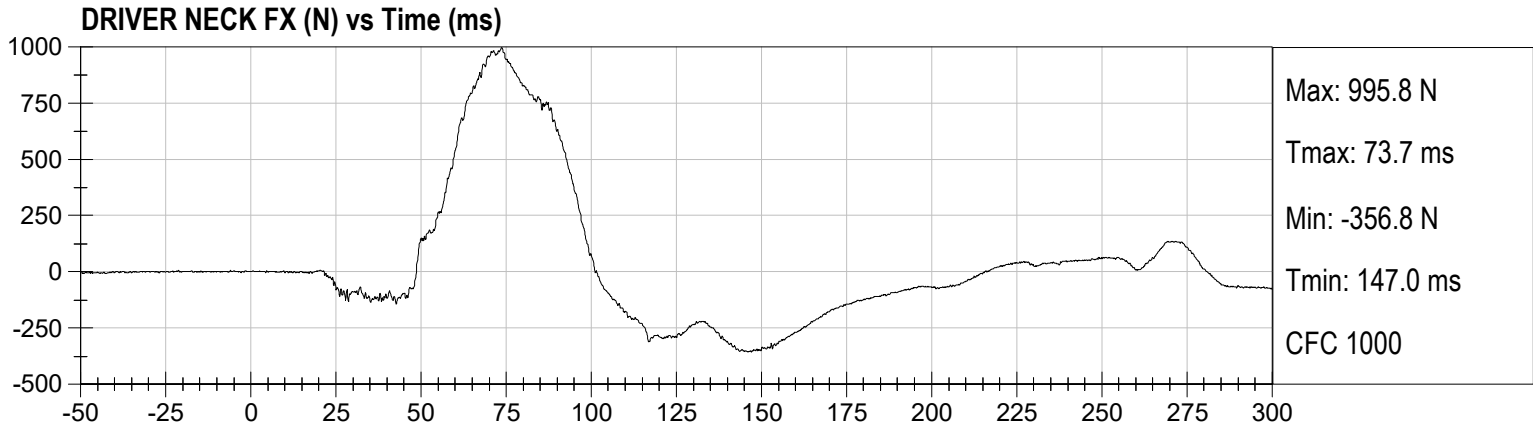


**DRIVER Nij (NTF) vs Time (ms)**

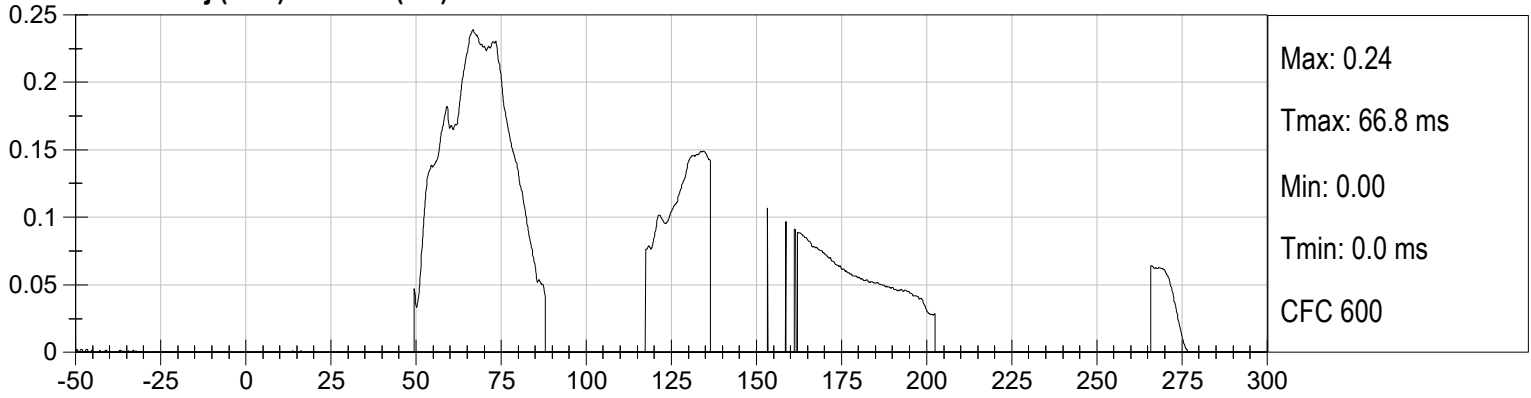


**DRIVER Nij (NTE) vs Time (ms)**

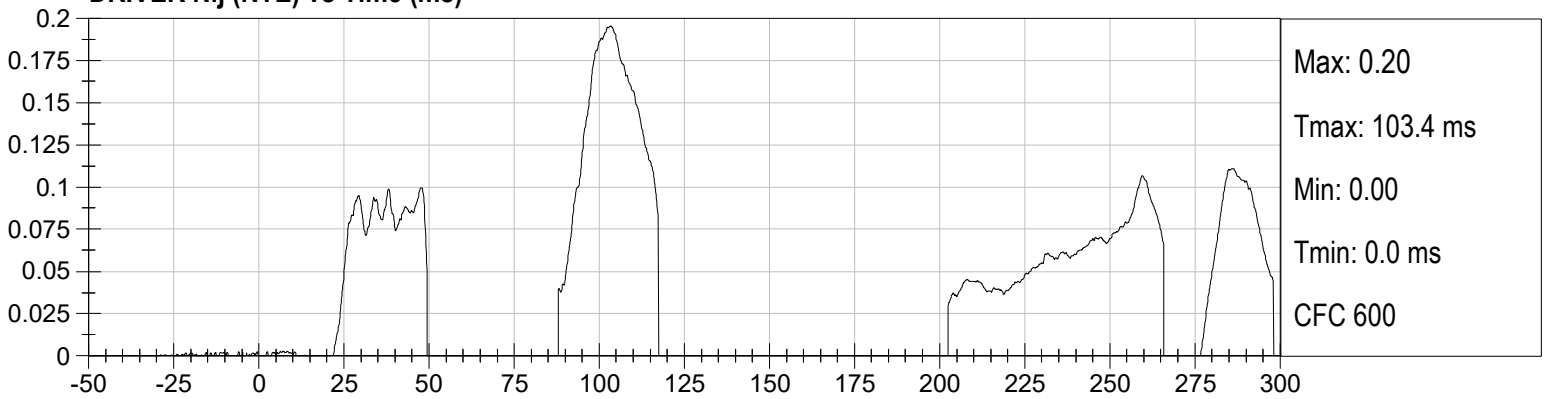

**DRIVER Nij (NCF) vs Time (ms)**

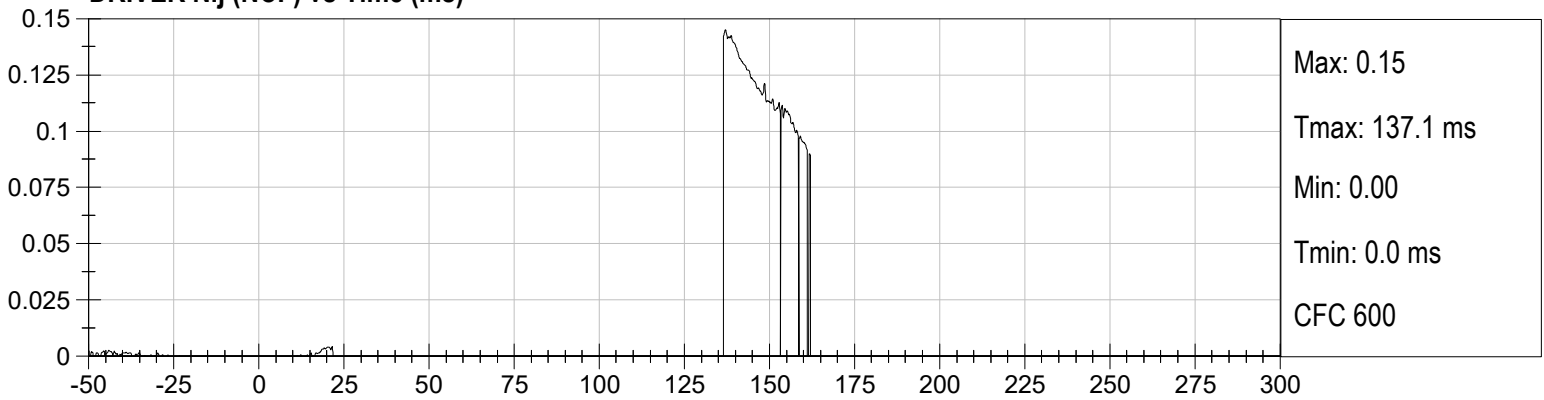


**DRIVER Nij (NCE) vs Time (ms)**

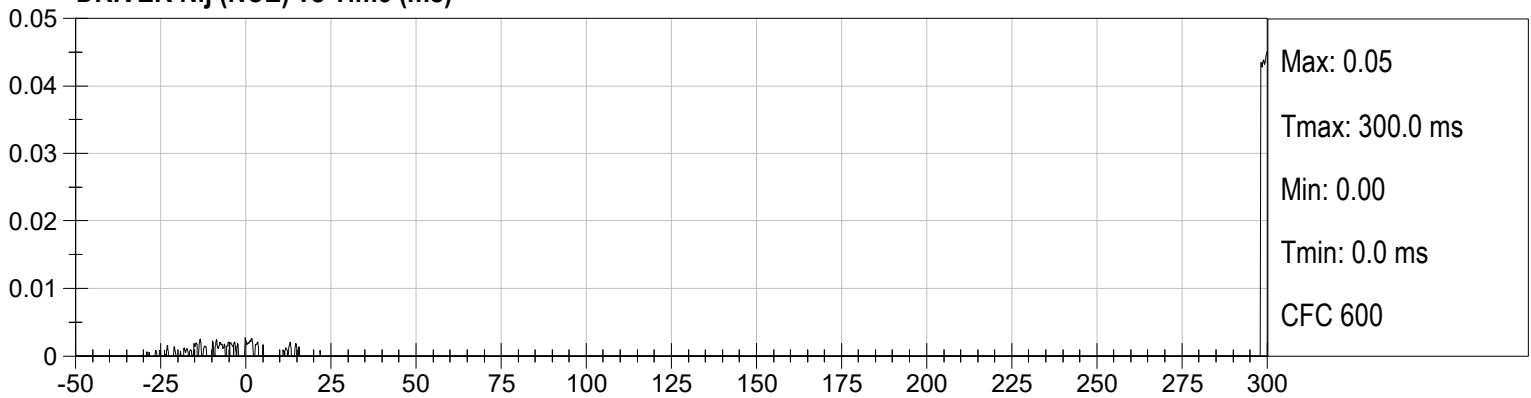





**DRIVER LEFT FEMUR (N) vs Time (ms)**

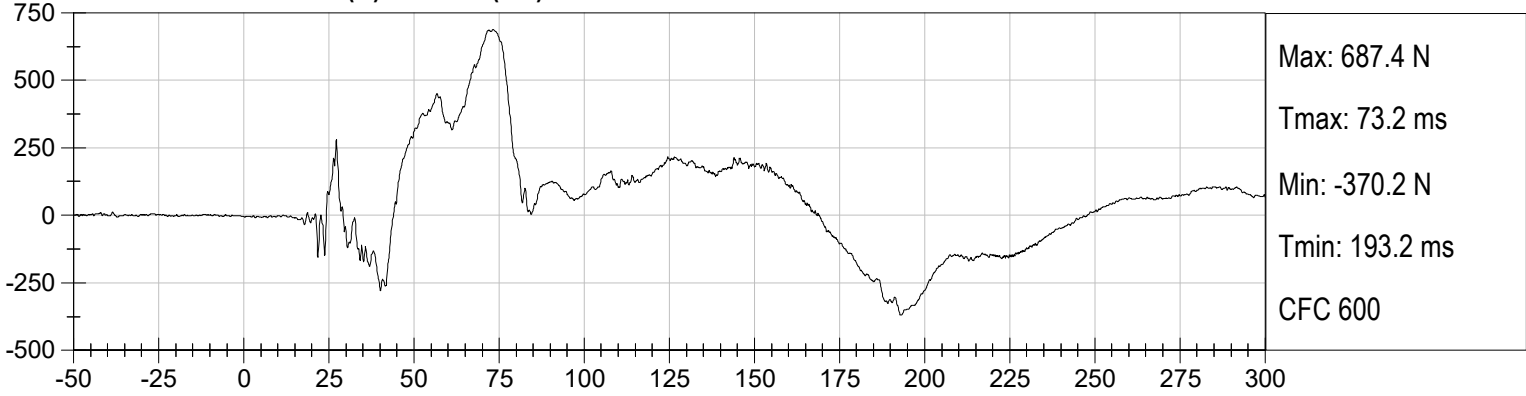


**DRIVER RIGHT FEMUR (N) vs Time (ms)**

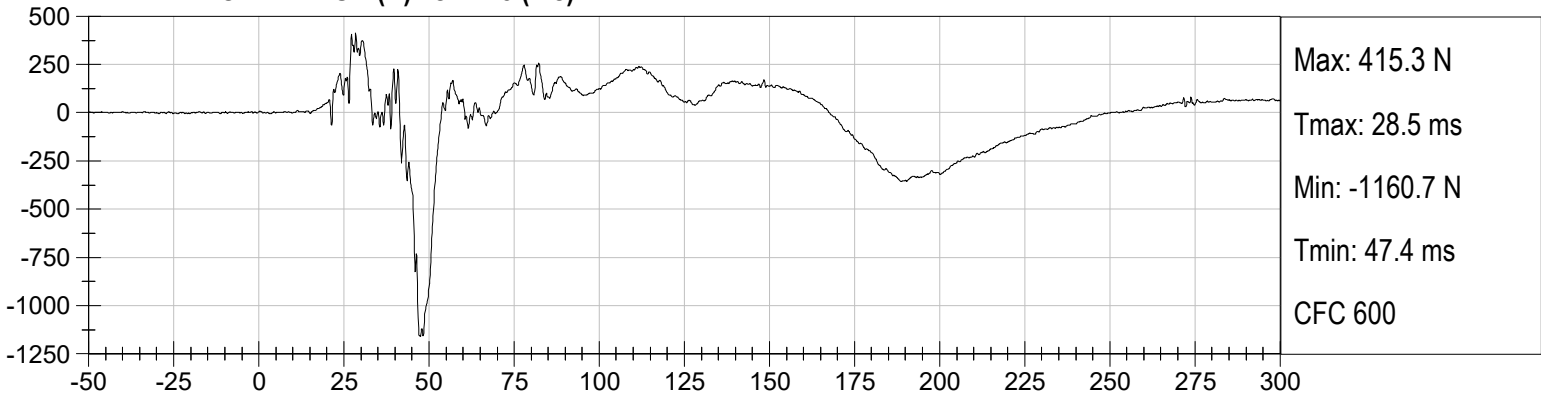


**PASSENGER HEAD X (g) vs Time (ms)**

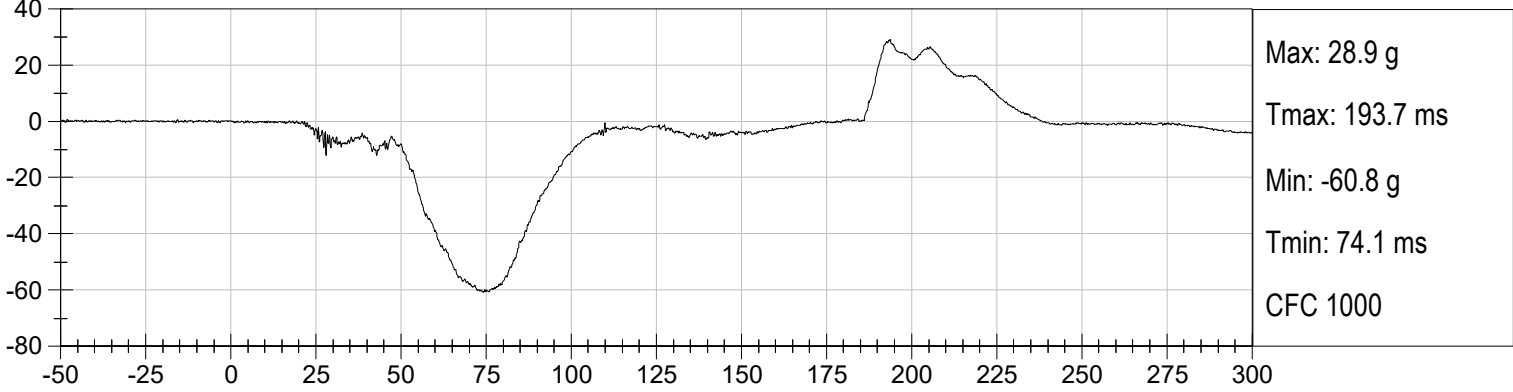


**PASSENGER HEAD Y (g) vs Time (ms)**

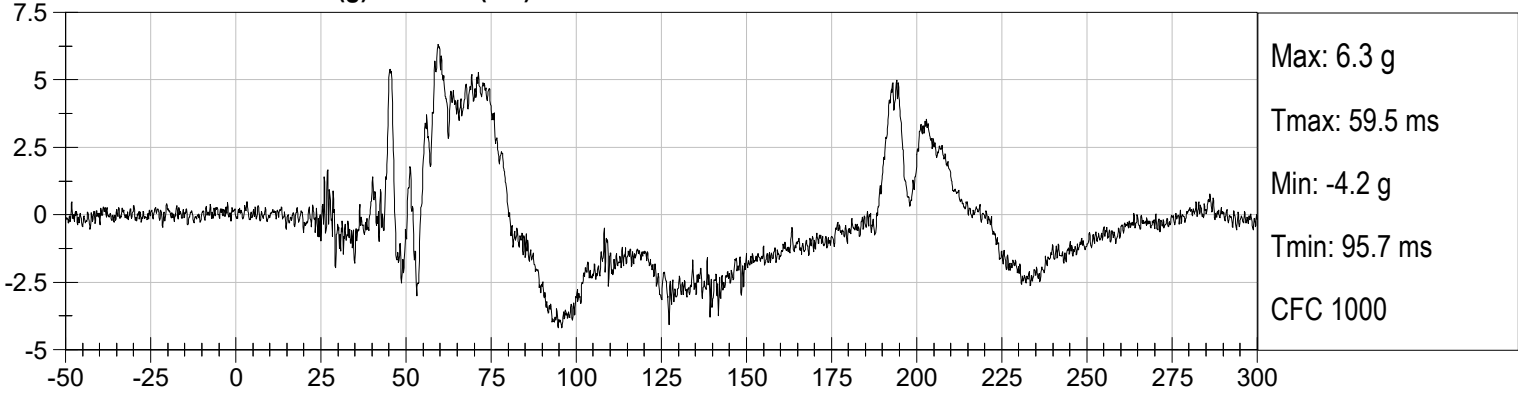


**PASSENGER HEAD Z (g) vs Time (ms)**

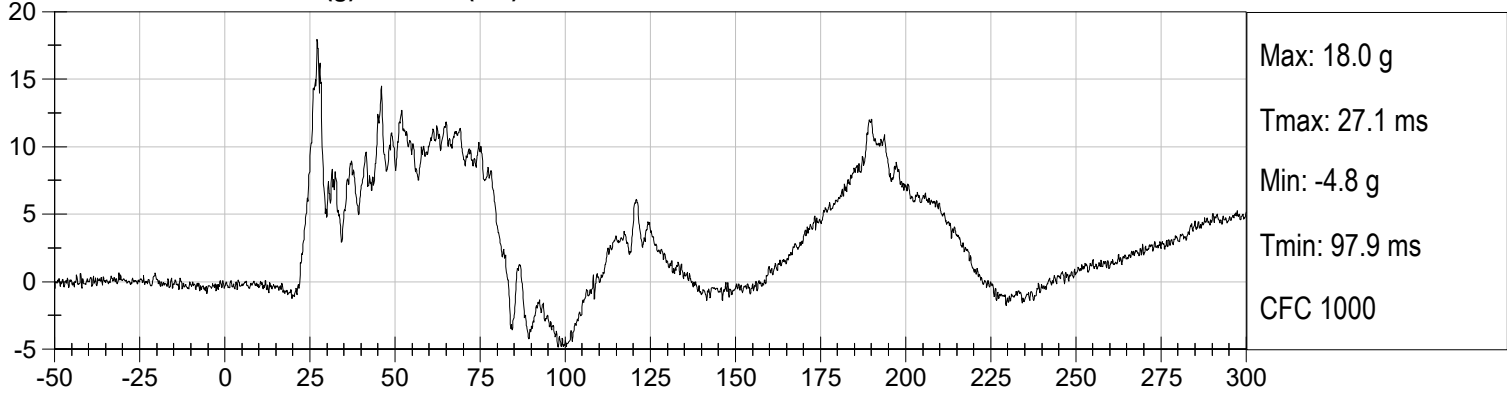


**PASSENGER HEAD Resultant (g) vs Time (ms)**

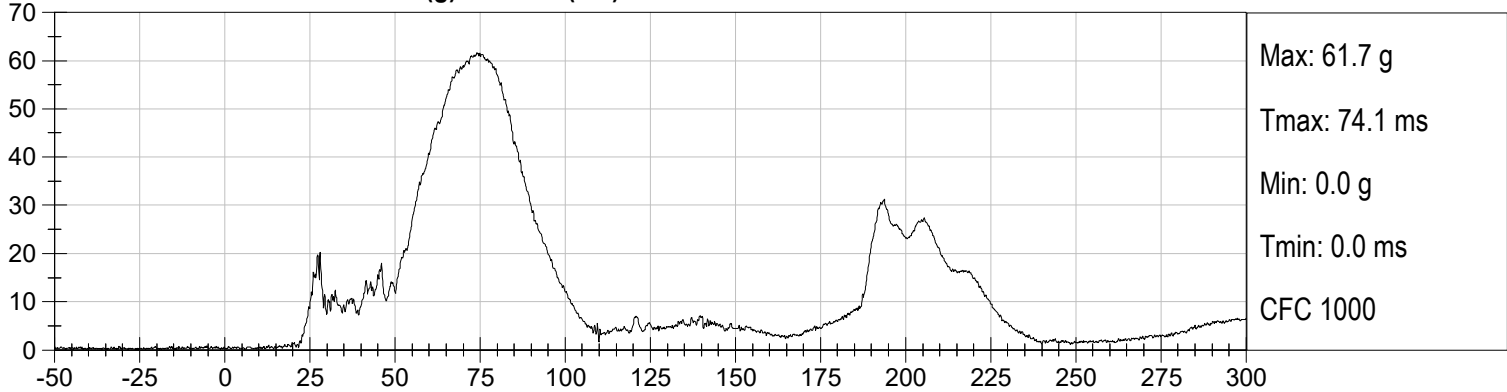


**PASSENGER CHEST DISPLACEMENT (mm) vs Time (ms)**

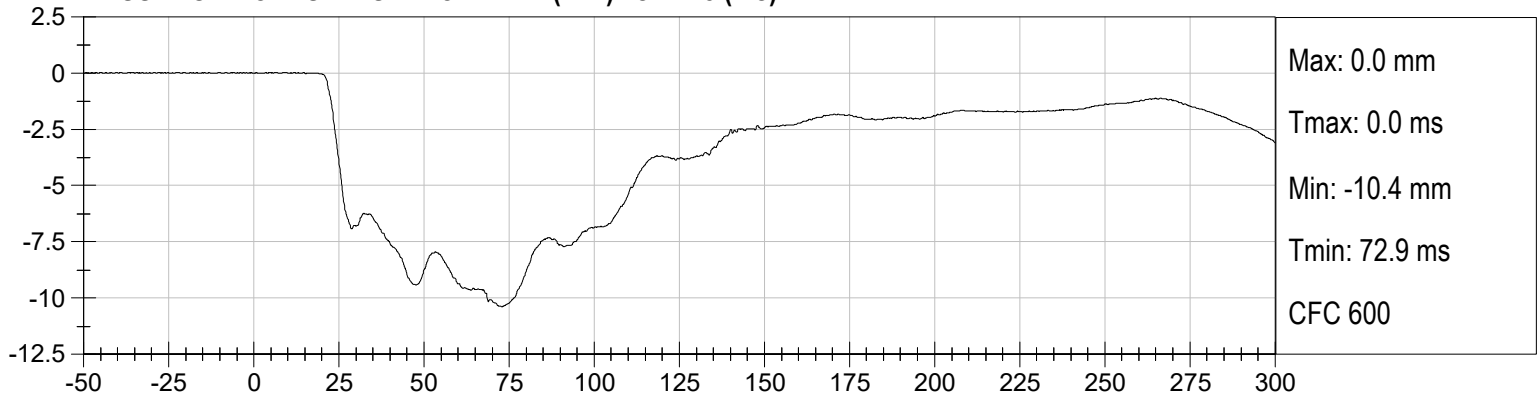


**PASSENGER CHEST X (g) vs Time (ms)**

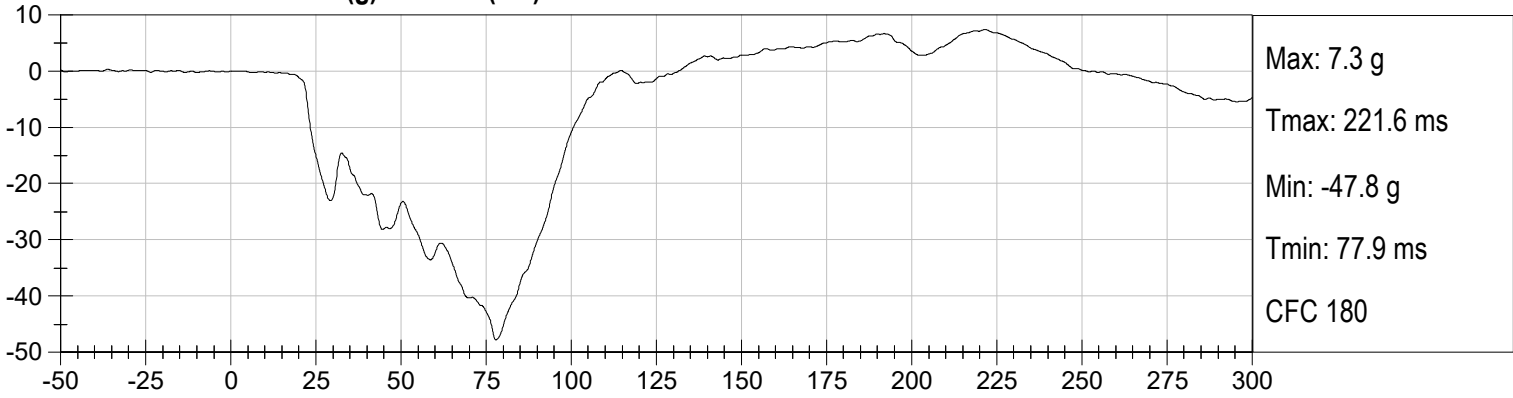


**PASSENGER CHEST Y (g) vs Time (ms)**

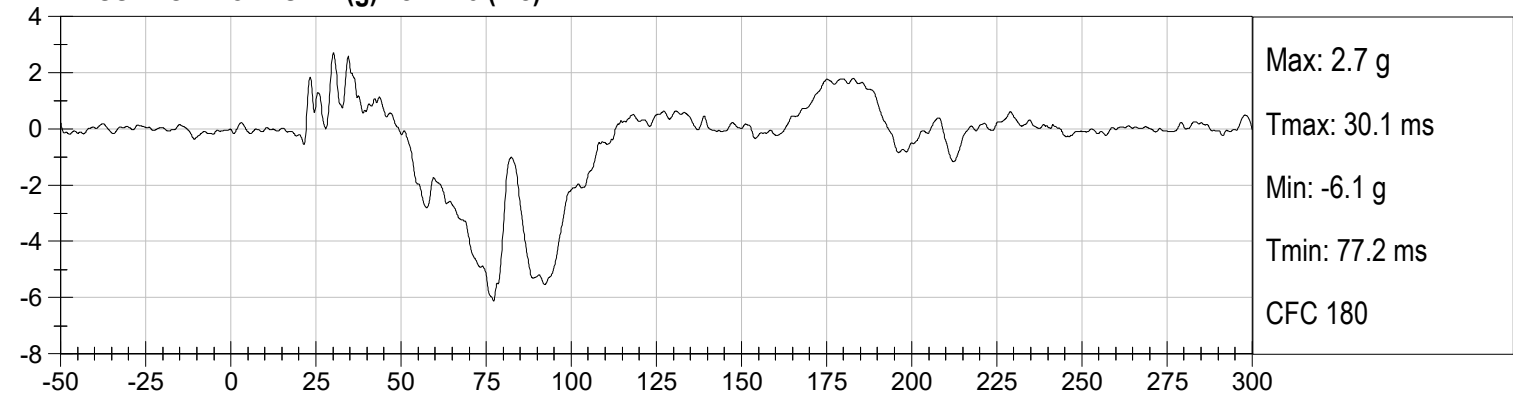


**PASSENGER CHEST Z (g) vs Time (ms)**

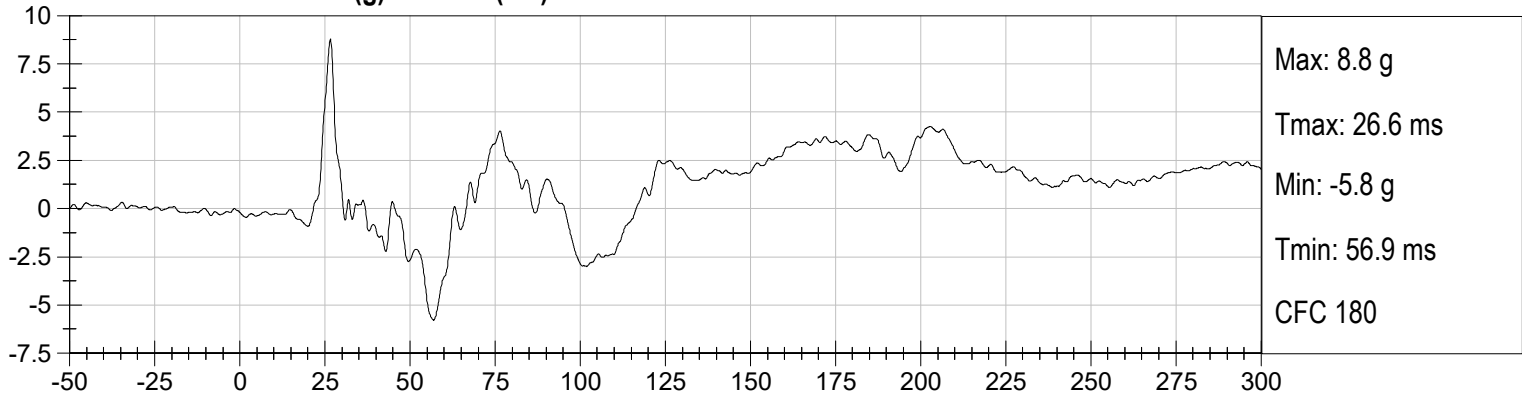


**PASSENGER CHEST Resultant (g) vs Time (ms)**

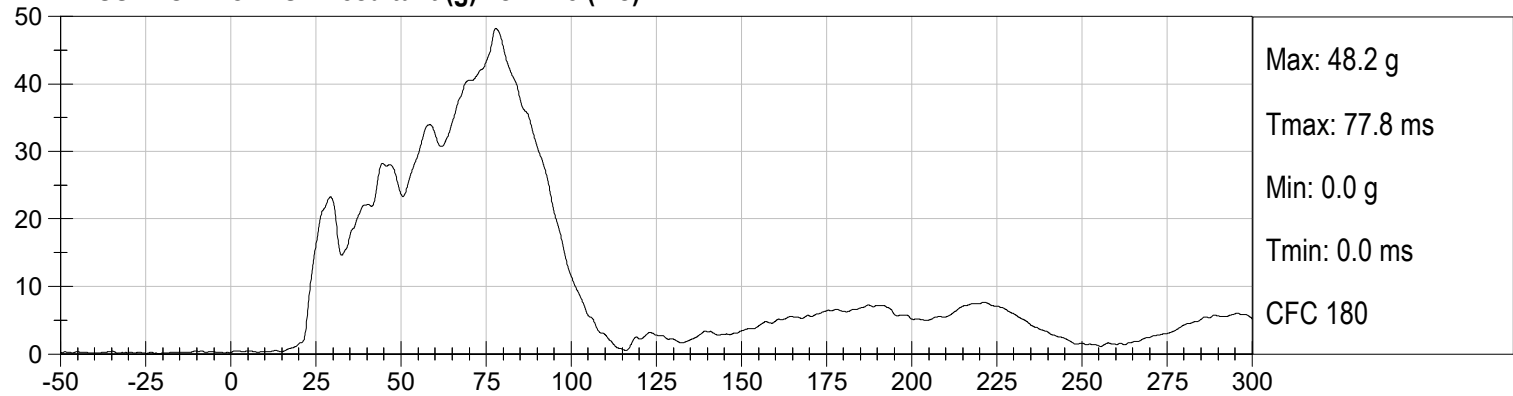


**PASSENGER NECK FX (N) vs Time (ms)**

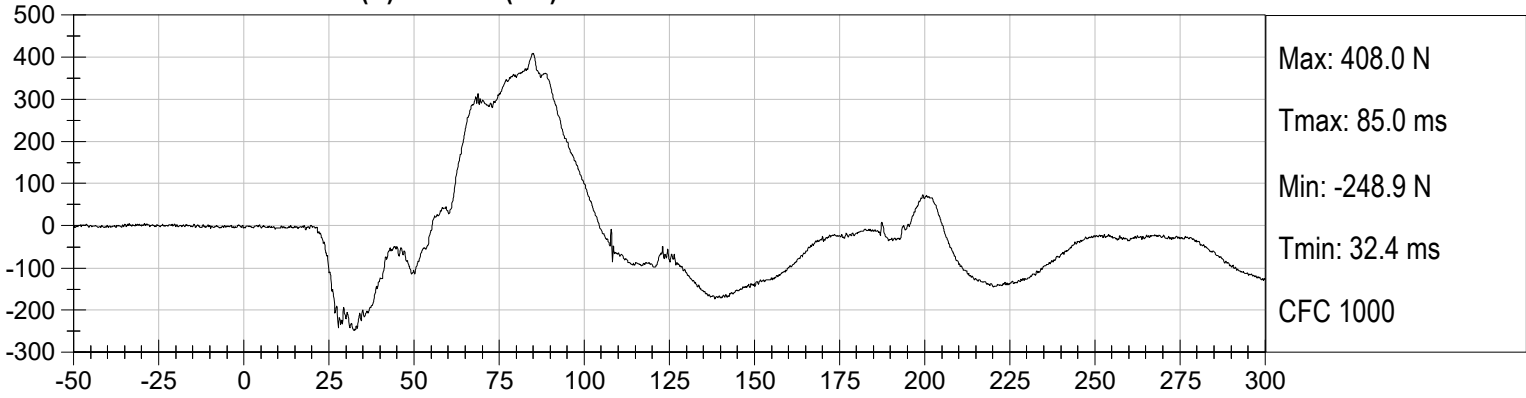


**PASSENGER NECK FZ (N) vs Time (ms)**

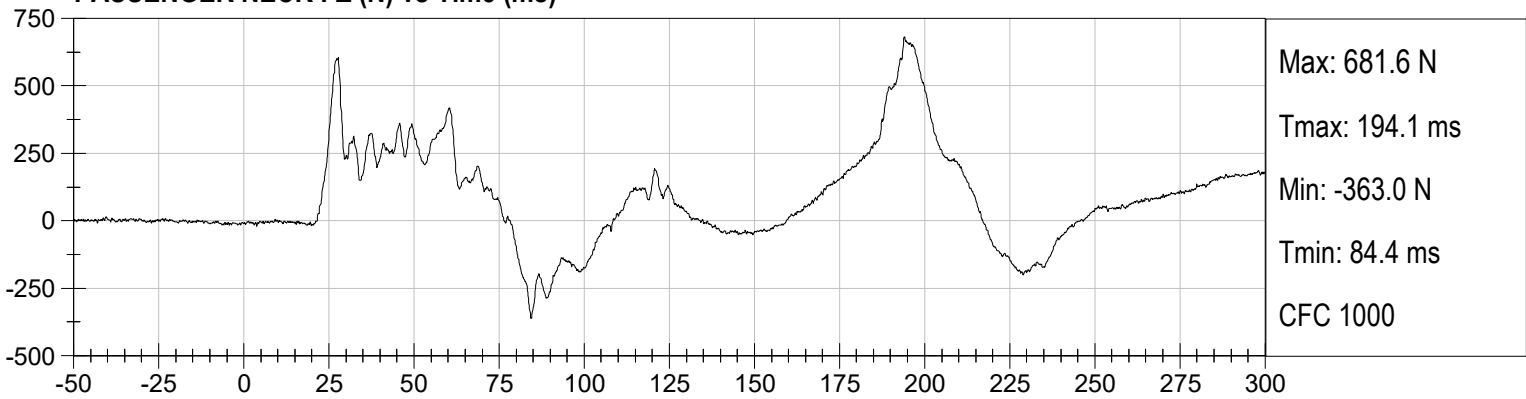


**PASSENGER NECK MY (Nm) vs Time (ms)**

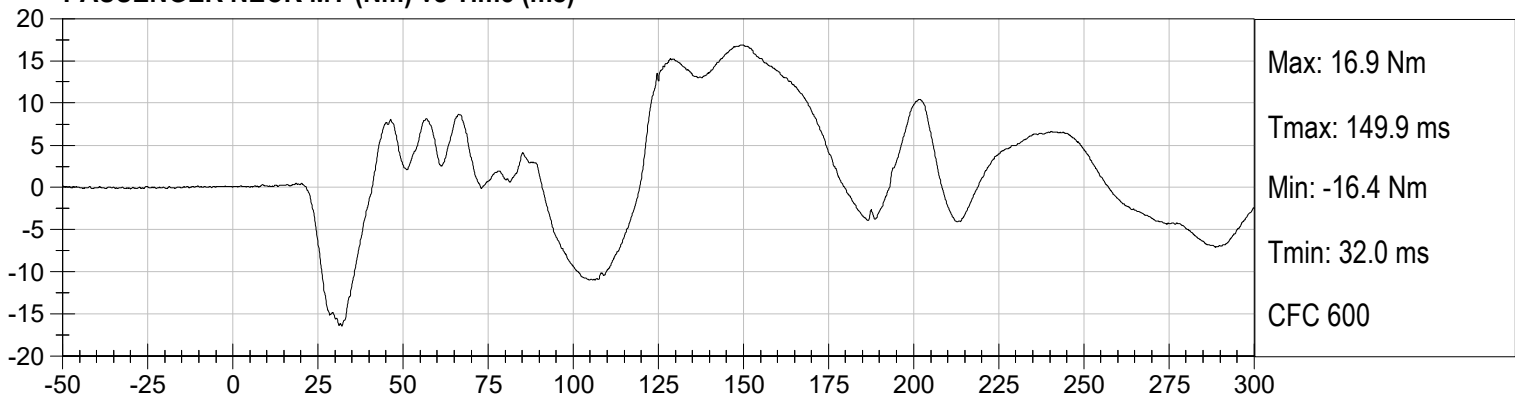


**PASSENGER Nij (NTF) vs Time (ms)**

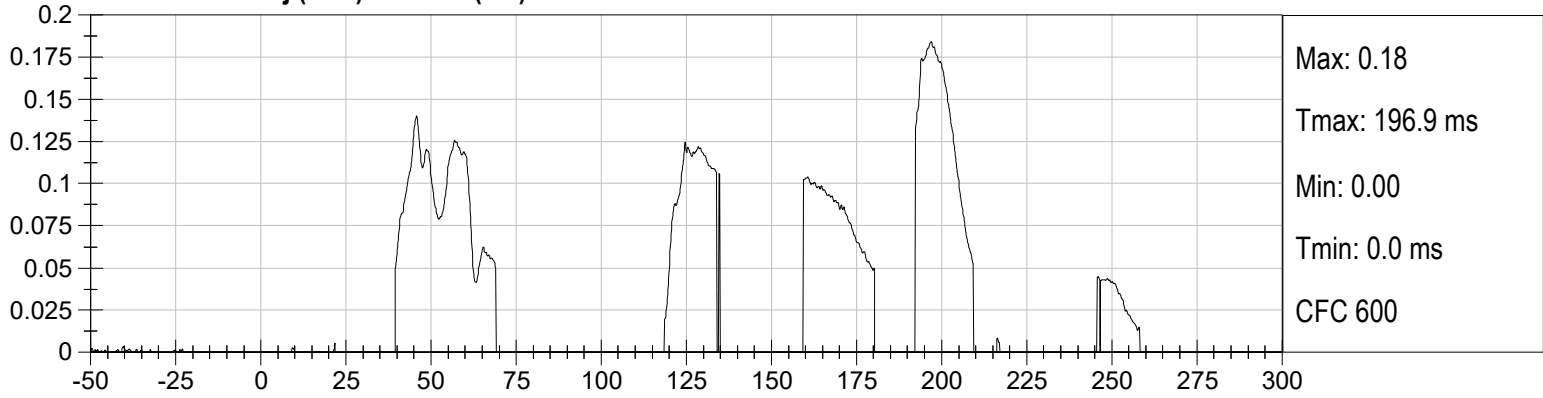


**PASSENGER Nij (NTE) vs Time (ms)**


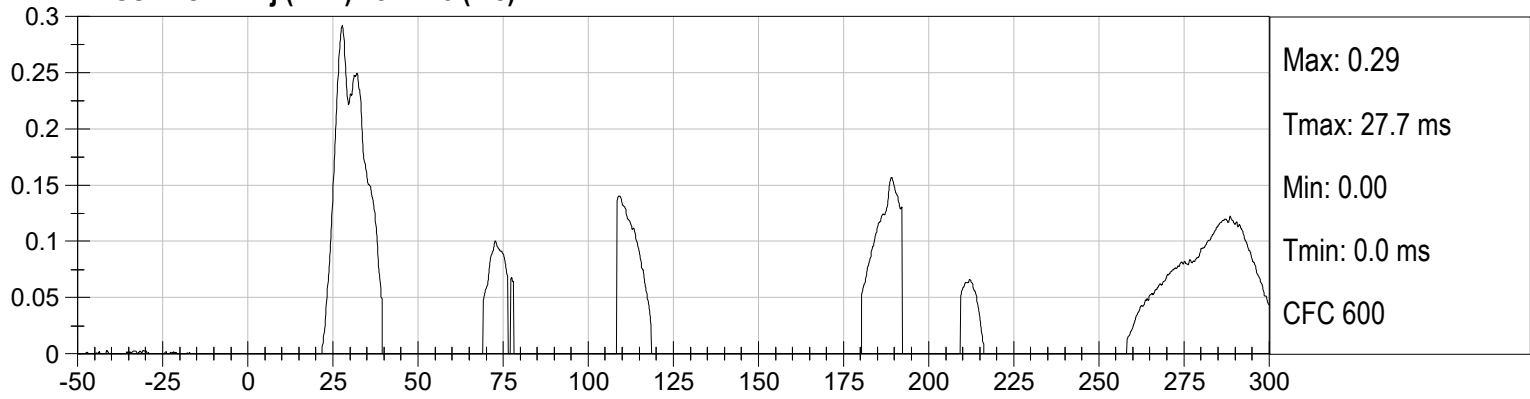


**PASSENGER Nij (NCF) vs Time (ms)**

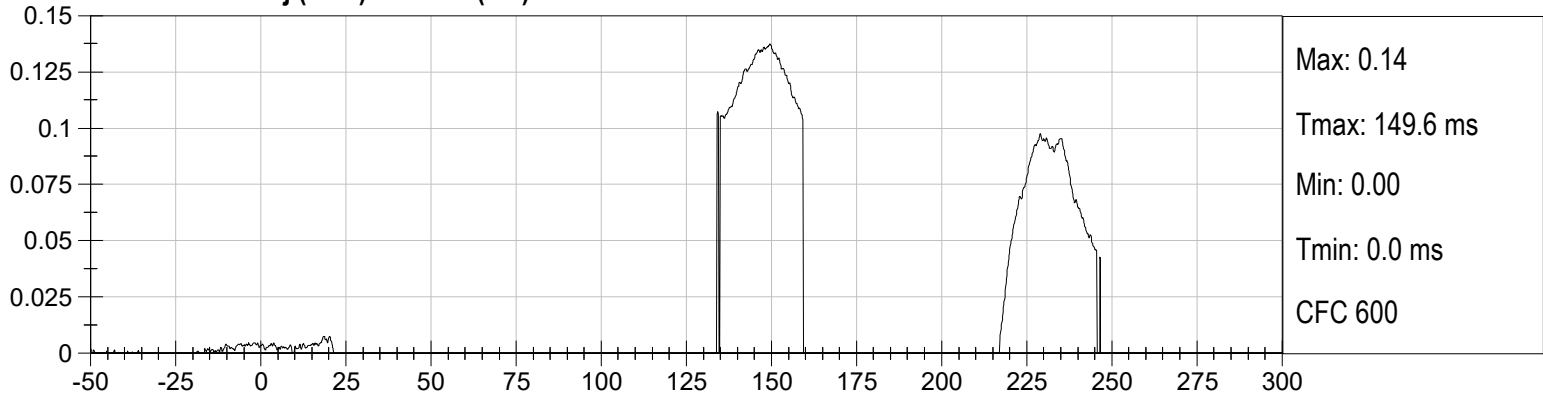

**PASSENGER Nij (NCE) vs Time (ms)**

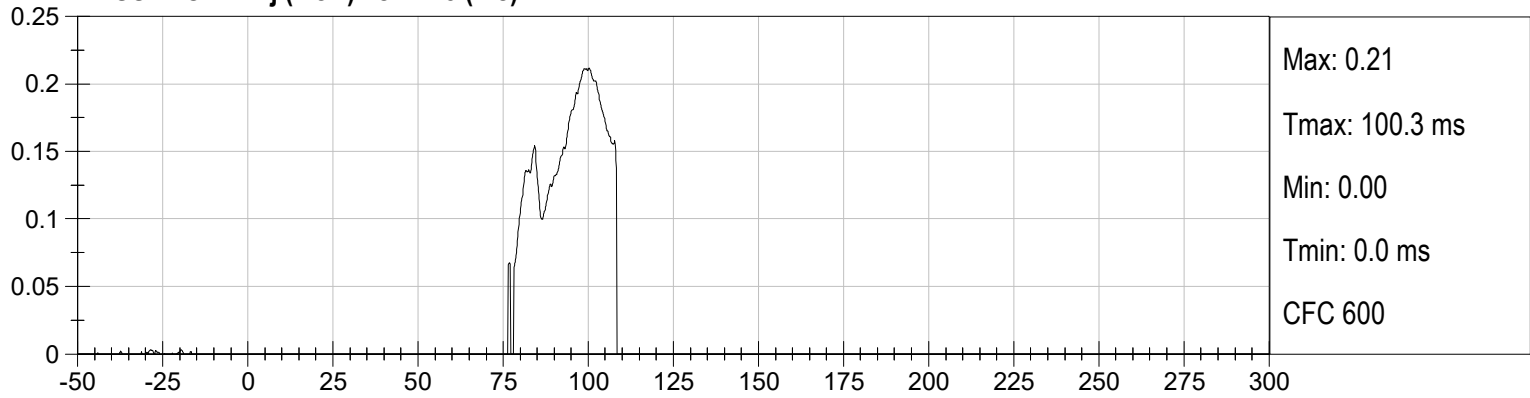

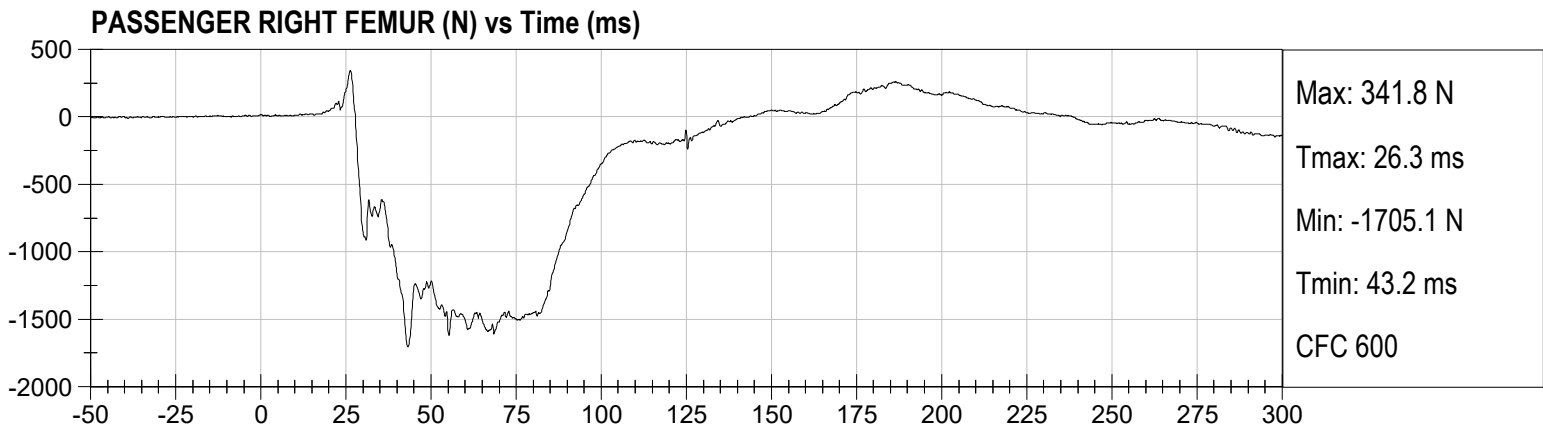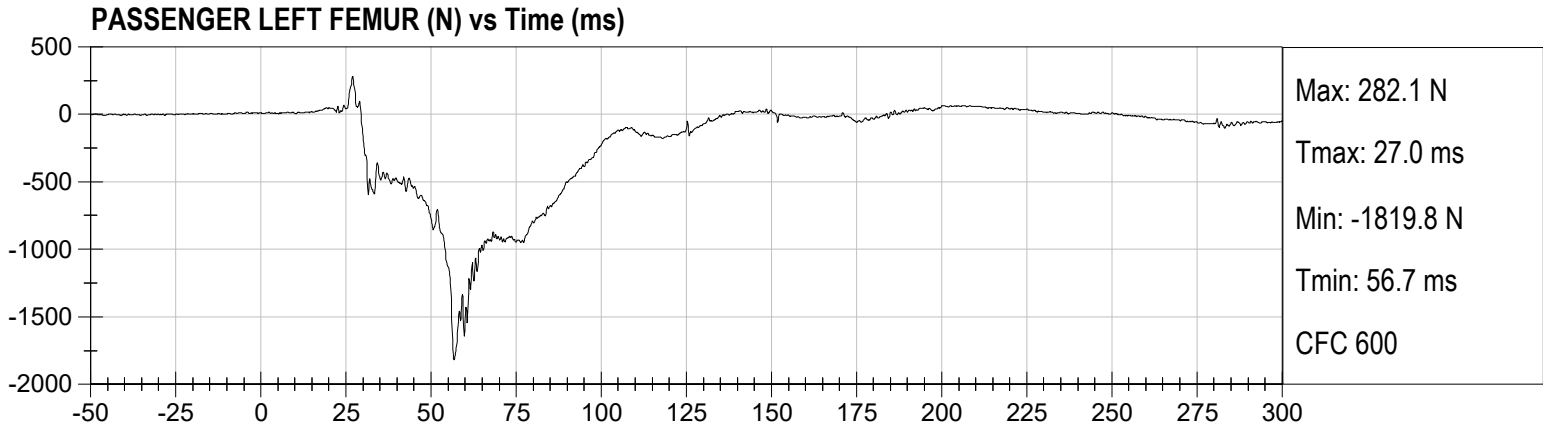

**APPENDIX C**  
**DUMMY CALIBRATION AND PERFORMANCE VERIFICATION DATA**



**CALIBRATION TEST RESULTS**

**PRE-TEST**

**HYBRID III 50<sup>TH</sup> PERCENTILE MALE - DRIVER ATD**

**Hybrid III, 50th External Measurements**  
**SN: 351**

HYBRID III, PART 572, SUBPART E EXTERNAL DIMENSIONS				
DIMENSION	DESCRIPTION	DETAILS	ASSEMBLY DIMENSION (inches)	ACTUAL MEASUREMENT
A	TOTAL SITTING HEIGHT	Seat surface to highest point on top of the head.	34.6-35.0	34.8
B	SHOULDER PIVOT HEIGHT	Centerline of shoulder pivot bolt to the seat surface.	19.9-20.5	20.0
C	H-POINT HEIGHT	Reference	3.3-3.5	3.4
D	H-POINT LOCATION FROM BACKLINE	Reference	5.3-5.5	5.5
E	SHOULDER PIVOT FROM BACKLINE	Center of the shoulder clevis to the rear vertical surface of the fixture.	3.3-3.7	3.5
F	THIGH CLEARANCE	Measured at the highest point on the upper femur segment.	5.5-6.1	6.0
G	BACK OF ELBOW TO WRIST PIVOT	back of the elbow flesh to the wrist pivot in line with the elbow and wrist pivots	11.4-12.0	11.8
H	HEAD BACK TO BACKLINE	Back of Skull cap skin to seat rear vertical surface (Reference)	1.6-1.8	1.7
I	SHOULDER TO- ELBOW LENGTH	Measure from the highest point on top of the shoulder clevis to the lowest part of the flesh on the elbow in line with the elbow pivot bolt.	13.0-13.6	13.3
J	ELBOW REST HEIGHT	Measure from the flesh below the elbow pivot bolt to the seat surface.	7.5-8.3	7.8
K	BUTTOCK TO KNEE LENGTH	The forward most part of the knee flesh to the rear vertical surface of the fixture.	22.8-23.8	23.8
L	POPLITEAL HEIGHT	Seat surface to the plane of the horizontal plane of the bottom of the feet.	16.9-17.9	17.0
M	KNEE PIVOT HEIGHT	Centerline of knee pivot bolt to the horizontal plane of the bottom of the feet.	19.1-19.7	19.5
N	BUTTOCK POPLITEAL LENGTH	The rearmost surface of the lower leg to the same point on the rear surface of the buttocks used for dim. "K".	17.8-18.8	18.8

HYBRID III, SUBPART E EXTERIOR DIMENSIONS, continued				
DIMENSION	DESCRIPTION	DETAILS		ACTUAL MEASUREMENT
O	CHEST DEPTH WITHOUT JACKET	Measured 16.9-17.1 in. above seat surface	8.4-9.0	8.5
P	FOOT LENGTH	Tip of toe to rear of heel	9.9-10.5	10.3
V	SHOULDER BREADTH	Outside edges of right and left shoulder clevises	16.3-17.2	16.5
W	FOOT BREADTH	The widest part of the foot	3.6-4.2	4.0
Y	CHEST CIRCUMFERENCE (WITH CHEST JACKET)	Measured 16.9-17.1 in. above seat surface	38.2-39.4	39.2
Z	WAIST CIRCUMFERENCE	Measured 8.9-9.1 in. above seat surface	32.9-34.1	33.7
AA	REFERENCE LOCATION FOR MEASUREMENT OF CHEST CIRCUMFERENCE	Reference	16.9-17.1	17.0
BB	REFERENCE LOCATION FOR MEASUREMENT OF WAIST CIRCUMFERENCE	Reference	8.9-9.1	9.0

**NOTE:** THE H-POINT IS LOCATED 1.83 INCHES FORWARD AND 2.57 INCHES DOWN FROM THE CENTER OF THE PELVIS ANGLE REFERENCE HOLE.

**MGA RESEARCH CORPORATION**  
**HEAD DROP TEST**  
**HYBRID III 50TH PERCENTILE MALE**


ATD Serial No: 351



Test ID: D202471



Tested Parameter	Units	Specification	Result	Pass/Fail
Laboratory Temperature	deg C	18.9 to 25.6	21.6	Pass
Laboratory Relative Humidity	%	10 to 70	30	Pass
Peak Resultant Acceleration	G's	225 to 275	249	Pass
Peak Lateral Acceleration	G's	<= +/- 15.0	-1.9	Pass
Unimodal	N/A	Yes	Yes	Pass
Oscillations	N/A	within 10% of peak	Yes	Pass
Overall Test Results				Pass

  
 \_\_\_\_\_  
 Laboratory Technician

10/05/2020  
 \_\_\_\_\_  
 Test Date

  
 \_\_\_\_\_  
 Approved By

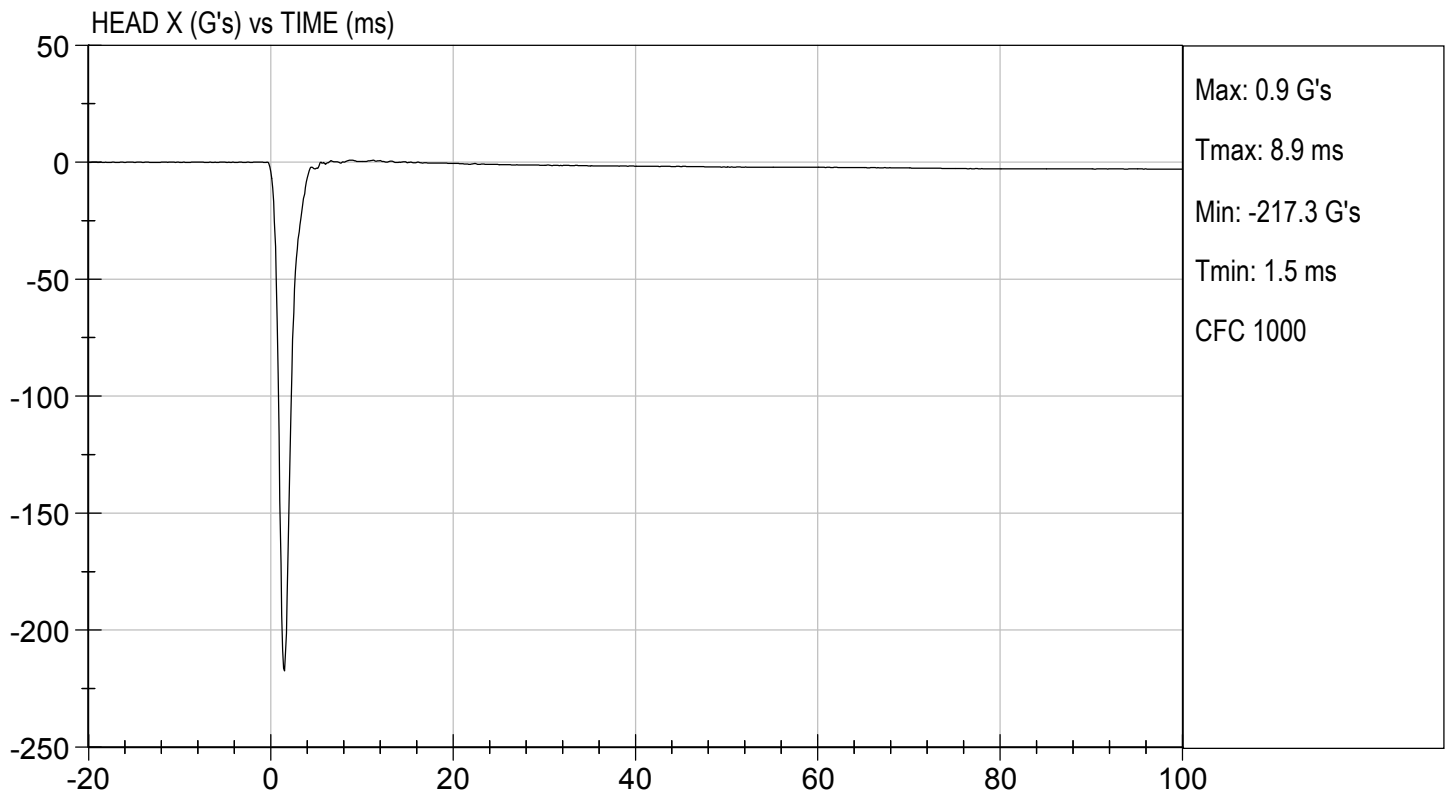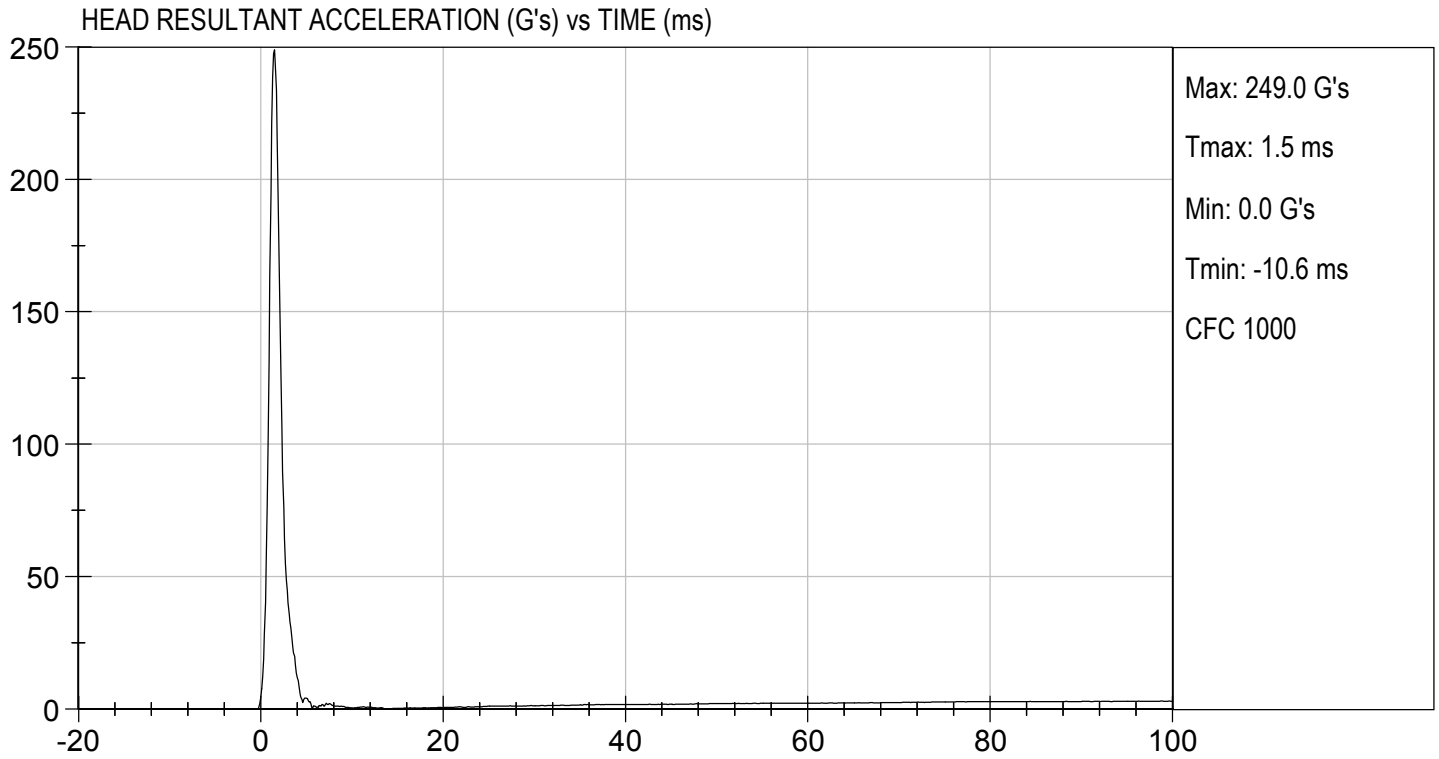

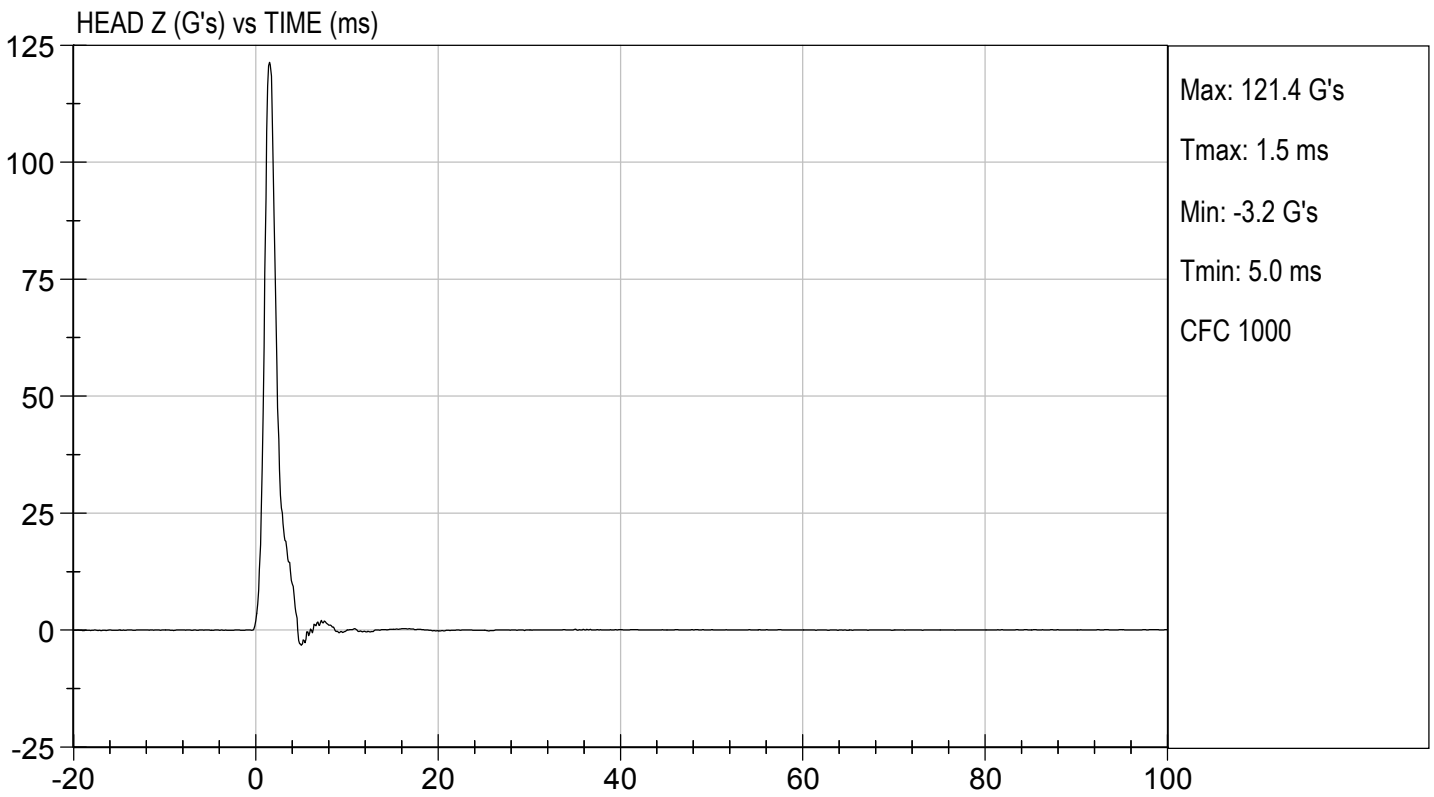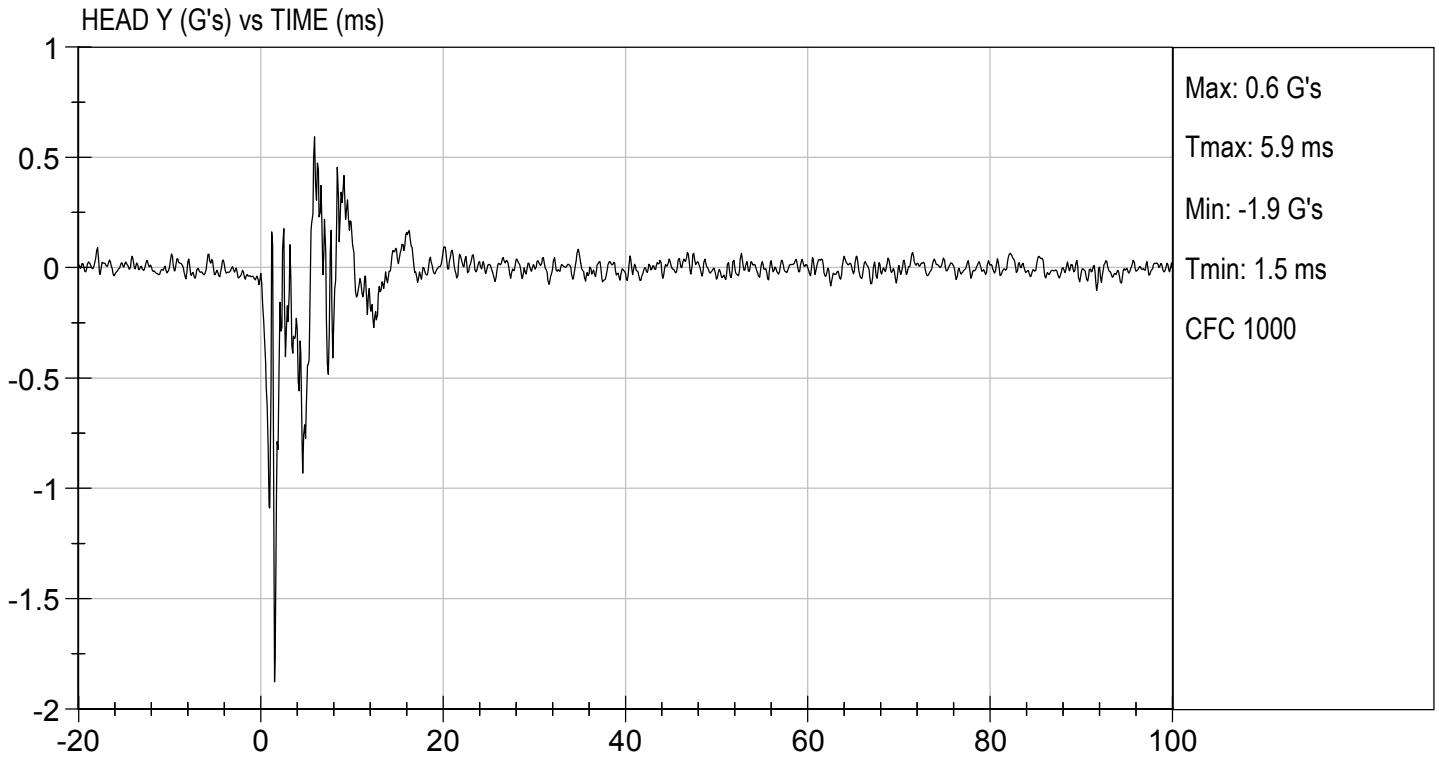

**MGA RESEARCH CORPORATION**  
**NECK FLEXION TEST**  
**HYBRID III 50TH PERCENTILE MALE**


ATD Serial No: 351



Test I.D.: D202472

Tested Parameter		Units	Specification	Result	Pass/Fail
Laboratory Temperature		deg C	20.6 to 22.2	21.6	Pass
Laboratory Relative Humidity		%	10 to 70	30	Pass
Pendulum Velocity		m/s	6.89 to 7.13	7.05	Pass
Pendulum Deceleration	10 ms	G's	22.50 to 27.50	24.60	Pass
	20 ms	G's	17.60 to 22.60	21.85	Pass
	30 ms	G's	12.50 to 18.50	16.66	Pass
Peak Pendulum Deceleration After 30 ms		G's	<= 29.0	16.6	Pass
Deceleration Decay Time to Cross 5 G's		ms	34.0 to 42.0	35.3	Pass
Maximum "D" Plane Rotation	Maximum	Deg	64.0 to 78.0	71.3	Pass
	Time	ms	57.0 to 64.0	57.7	Pass
"D" Plane Rotation Decay Time To Zero Crossing		ms	113.0 to 128.0	114.2	Pass
Moment About Occipital Condyle	Maximum	Nm	88.1 to 108.5	103.7	Pass
	Time	ms	47.0 to 58.0	47.0	Pass
Positive Moment Decay Time To Zero Crossing		ms	97.0 to 107.0	99.0	Pass
Overall Test Results					Pass


  
 \_\_\_\_\_  
 Laboratory Technician

10/05/2020  
 \_\_\_\_\_  
 Test Date

  
 \_\_\_\_\_  
 Approved By

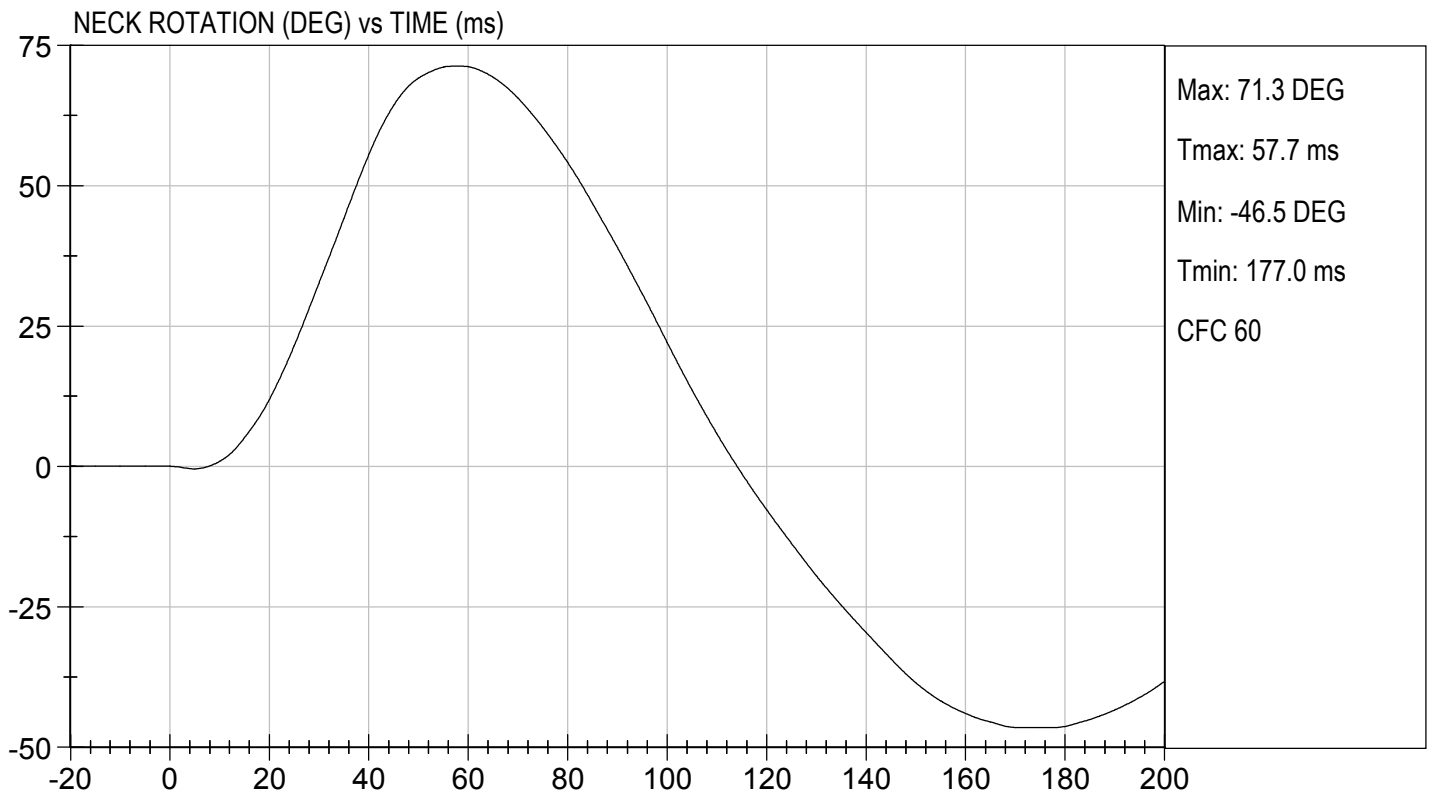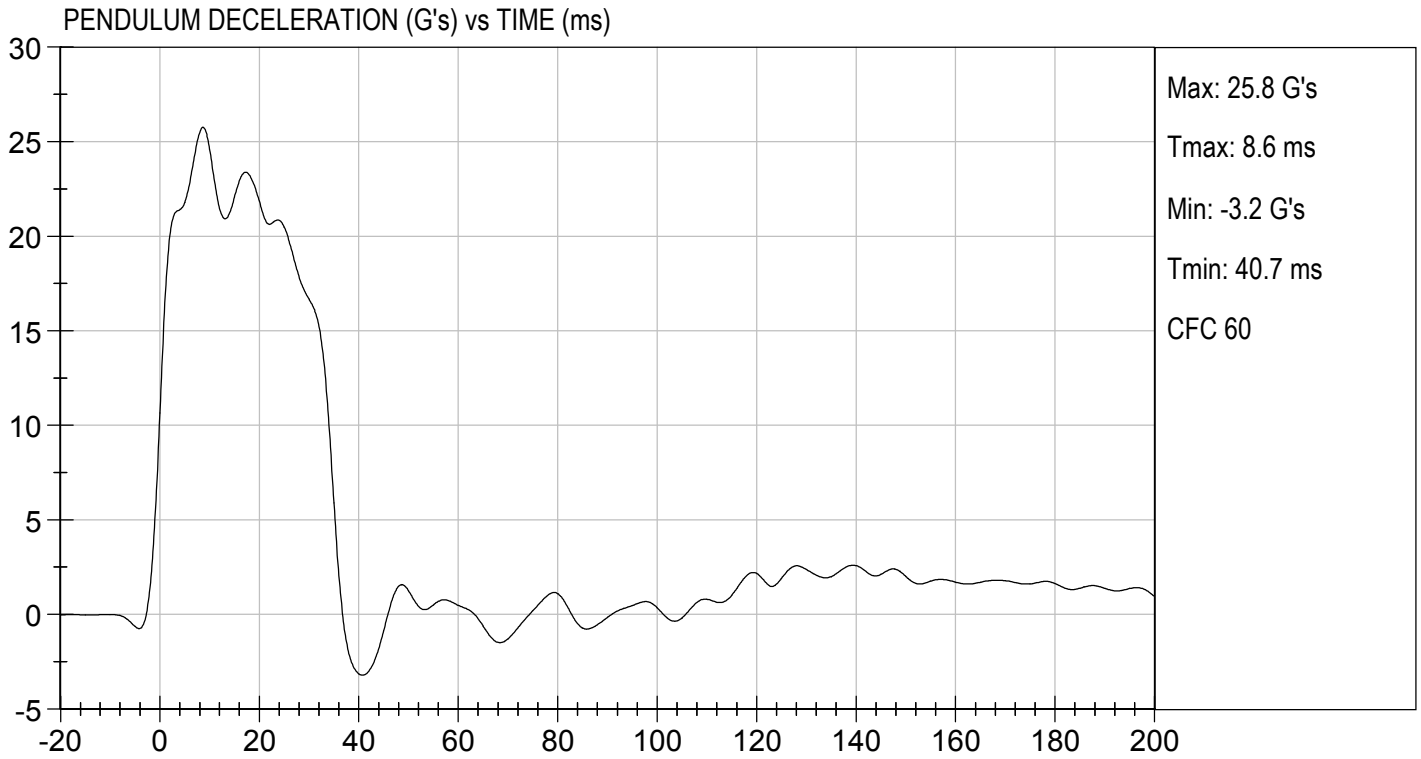



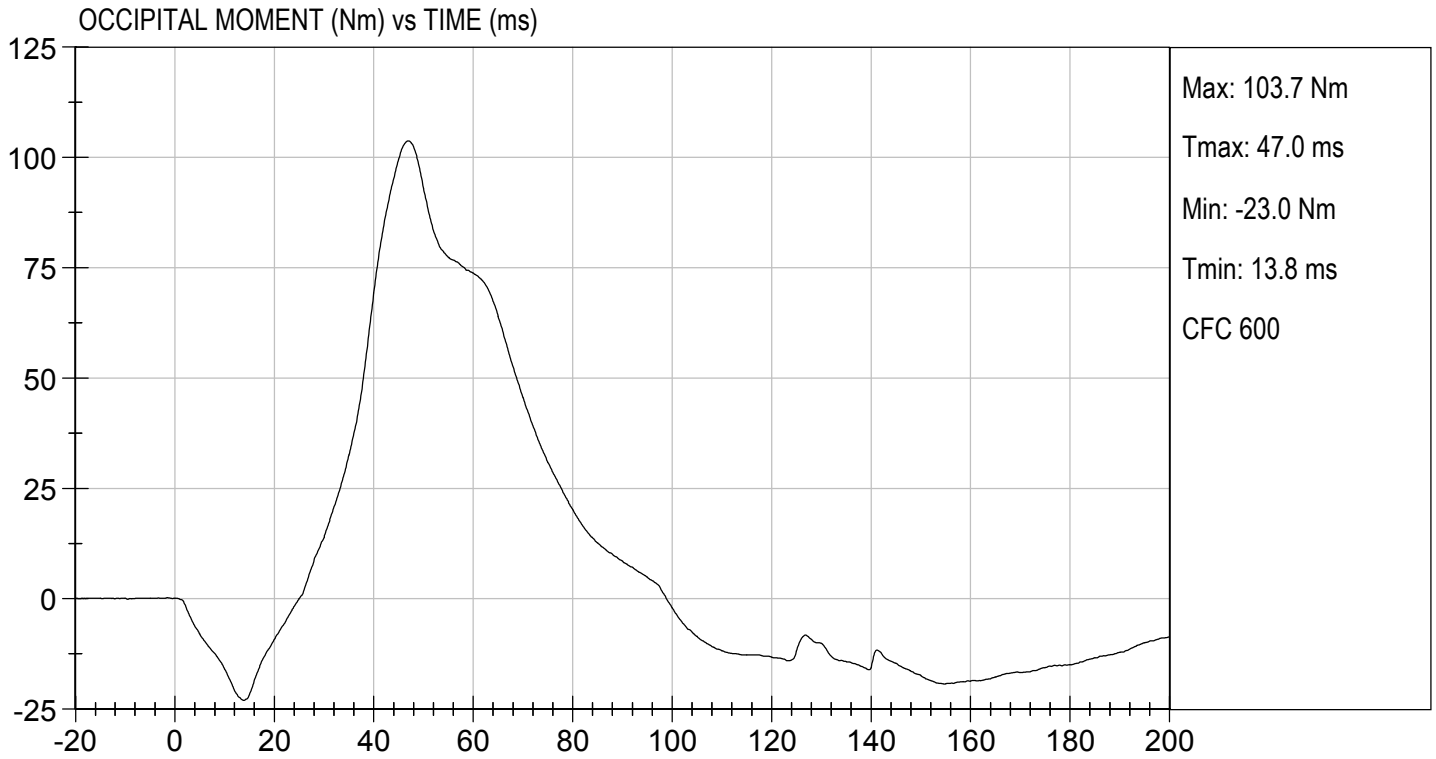

**MGA RESEARCH CORPORATION**  
**NECK EXTENSION TEST**  
**HYBRID III 50TH PERCENTILE MALE**


ATD Serial No: 351



Test I.D.: D202473


Tested Parameter		Units	Specification	Result	Pass/Fail
Laboratory Temperature		deg C	20.6 to 22.2	21.6	Pass
Laboratory Relative Humidity		%	10 to 70	30	Pass
Pendulum Velocity		m/s	5.95 to 6.19	6.12	Pass
Pendulum Deceleration	10 ms	G's	17.20 to 21.20	18.97	Pass
	20 ms	G's	14.00 to 19.00	15.83	Pass
	30 ms	G's	11.00 to 16.00	13.60	Pass
Peak Pendulum Deceleration After 30 ms		G's	<= 22.0	13.7	Pass
Deceleration Decay Time to Cross 5 G's		ms	38.0 to 46.0	40.7	Pass
Maximum "D" Plane Rotation	Maximum	Degrees	81.0 to 106.0	94.3	Pass
	Time	ms	72.0 to 82.0	76.7	Pass
"D" Plane Rotation Decay Time To Zero Crossing		ms	147.0 to 174.0	156.3	Pass
Moment About Occipital Condyle	Maximum	Nm	-52.9 to -79.9	-63.2	Pass
	Time	ms	65.0 to 79.0	70.2	Pass
Negative Moment Decay Time To Zero Crossing		ms	120.0 to 148.0	140.9	Pass
Overall Test Results					Pass

  
 \_\_\_\_\_  
 Laboratory Technician

10/05/2020  
 \_\_\_\_\_  
 Test Date

  
 \_\_\_\_\_  
 Approved By

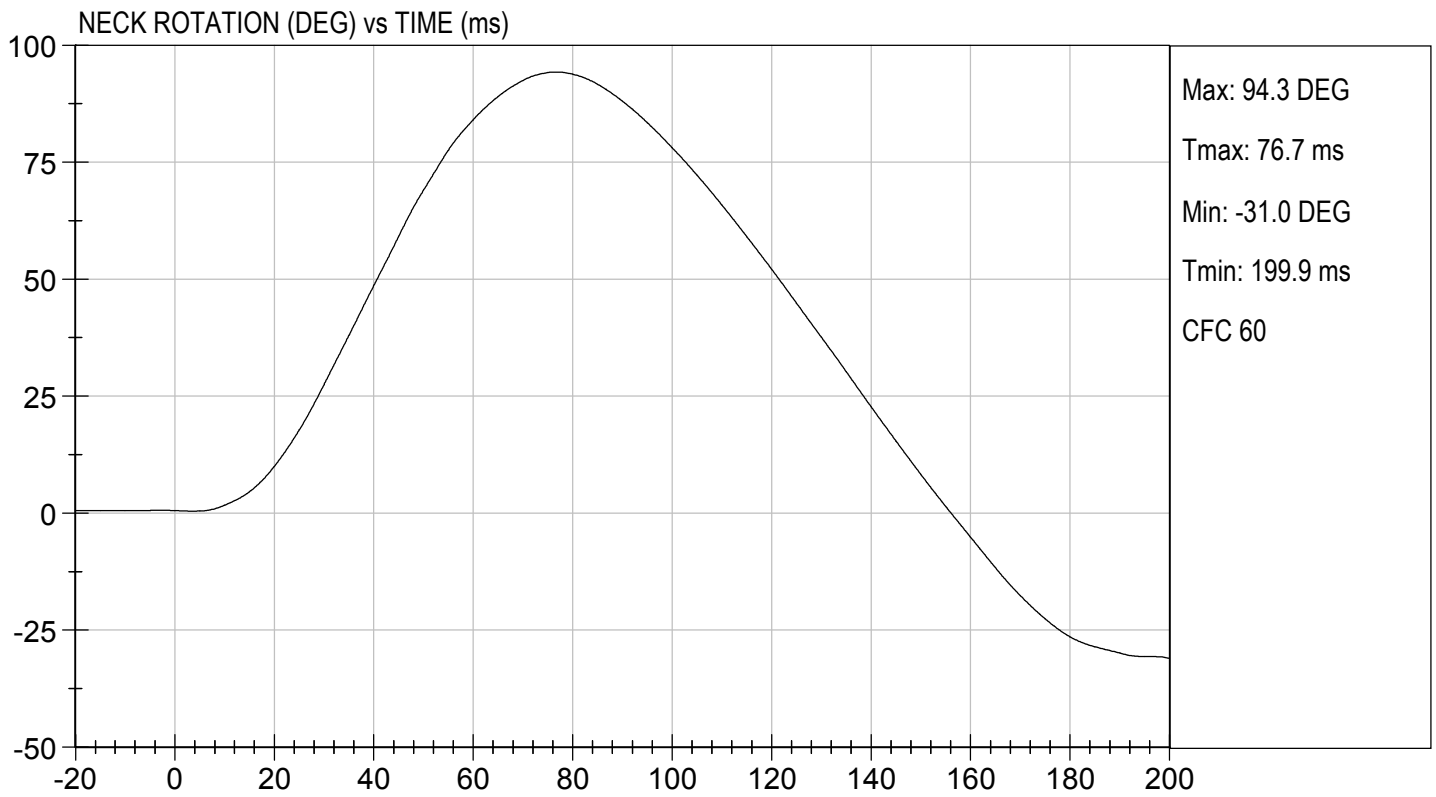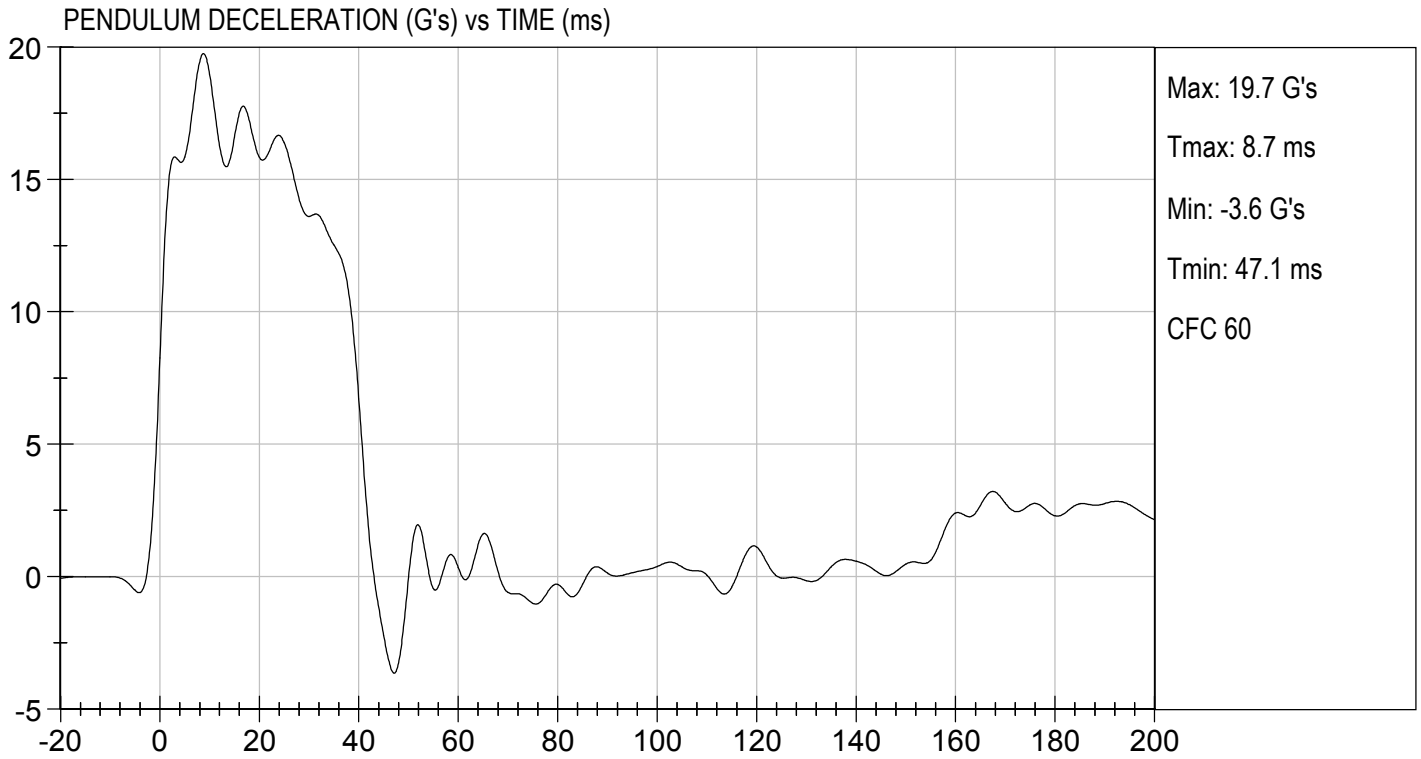

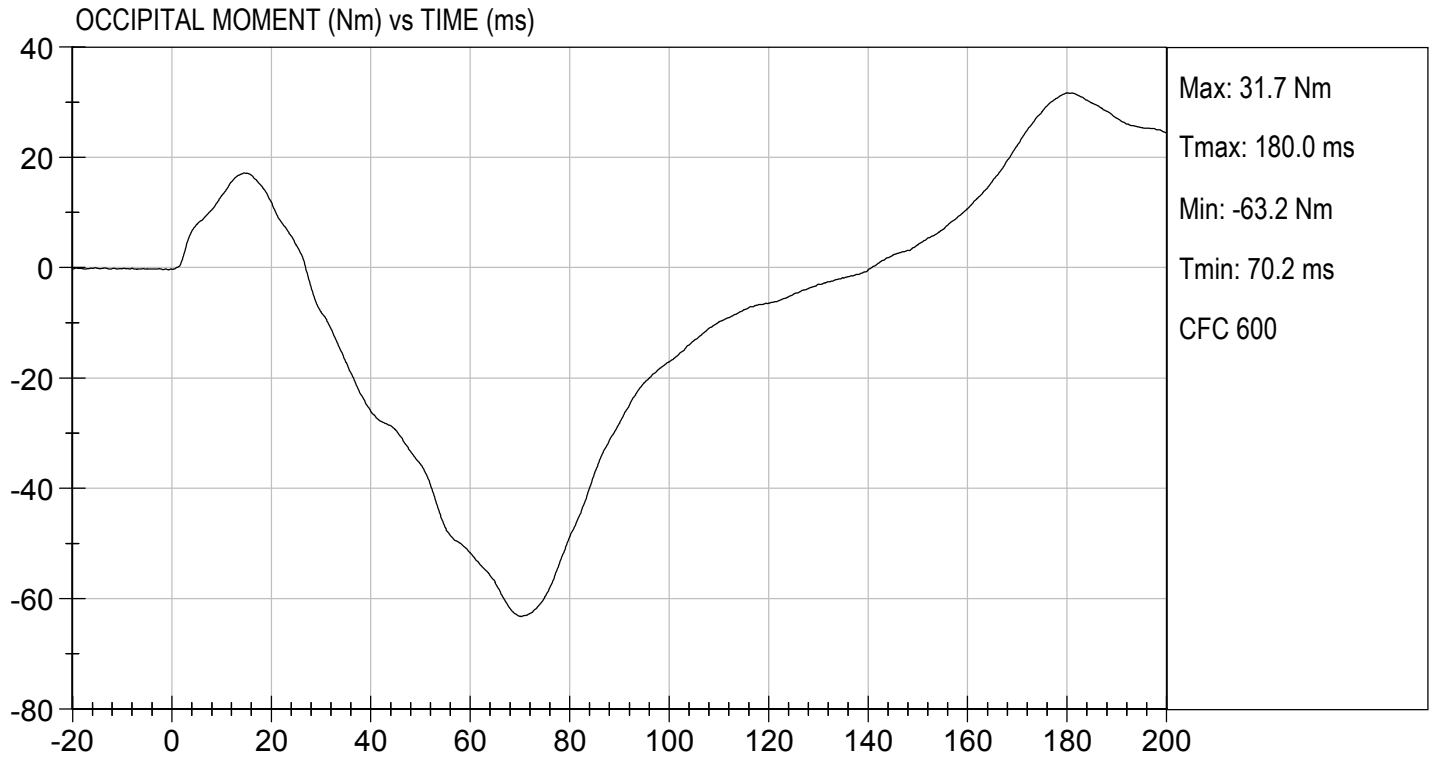

**MGA RESEARCH CORPORATION**  
**THORAX IMPACT**  
**HYBRID III 50TH PERCENTILE MALE**


**ATD Serial No:** 351


**Test I.D:** D202474

Tested Parameter	Units	Specification	Result	Pass/Fail
Laboratory Temperature	deg C	20.6 to 22.2	21.6	Pass
Laboratory Relative Humidity	%	10 to 70	30	Pass
Probe Velocity	m/s	6.58 to 6.82	6.77	Pass
Peak Probe Force	N	5159 to 5893	5,345	Pass
Peak Sternum Displacement	cm	6.35 to 7.26	7.15	Pass
Internal Hysteresis	%	69 to 85	70	Pass
<b>Overall Test Results</b>				<b>Pass</b>

  
 \_\_\_\_\_  
 Laboratory Technician

10/05/2020  
 \_\_\_\_\_  
 Test Date

  
 \_\_\_\_\_  
 Approved By

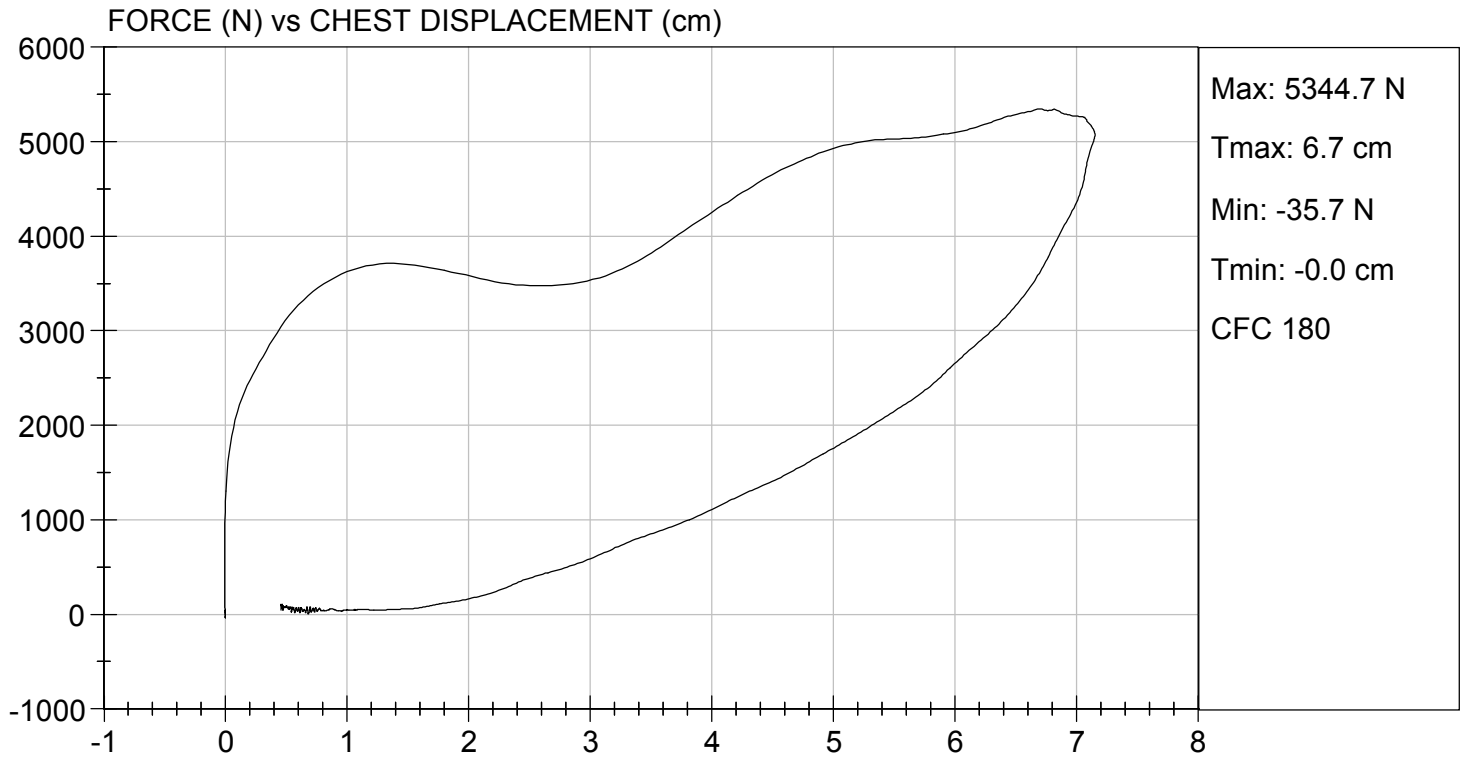

**MGA RESEARCH CORPORATION**  
**RIGHT KNEE IMPACT TEST**  
**HYBRID III 50TH PERCENTILE MALE**


**ATD Serial No:** 351

**Test I.D:** D202475

Tested Parameter	Units	Specification	Result	Pass/Fail
Laboratory Temperature	deg C	18.9 to 25.6	21.8	Pass
Laboratory Relative Humidity	%	10 to 70	30	Pass
Probe Velocity	m/s	2.07 to 2.13	2.10	Pass
Peak Probe Force	N	4715 to 5782	5,493	Pass
Overall Test Results				Pass

  
 \_\_\_\_\_  
 Laboratory Technician


10/05/2020  
 \_\_\_\_\_  
 Test Date

  
 \_\_\_\_\_  
 Approved By



TEST DESC: RIGHT KNEE  
VELOCITY: 6.89 ft/s, 2.10 m/s

TEST DATE: 10/05/2020  
TEST #: D202475

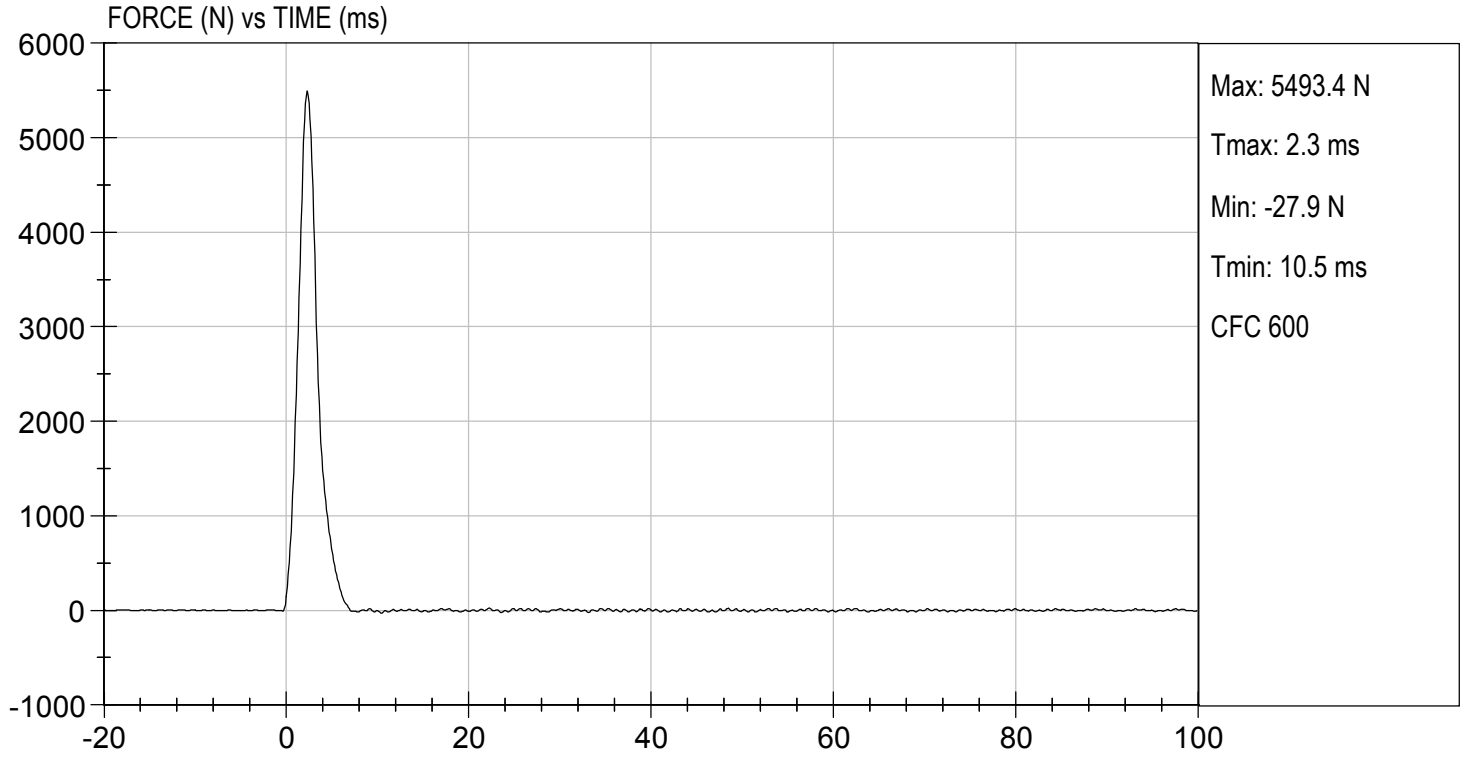



**MGA RESEARCH CORPORATION**  
**LEFT KNEE IMPACT TEST**  
**HYBRID III 50TH PERCENTILE MALE**


ATD Serial No: 351

Test I.D: D202476

Tested Parameter	Units	Specification	Result	Pass/Fail
Laboratory Temperature	deg C	18.9 to 25.6	21.8	Pass
Laboratory Relative Humidity	%	10 to 70	30	Pass
Probe Velocity	m/s	2.07 to 2.13	2.12	Pass
Peak Probe Force	N	4715 to 5782	5,179	Pass
Overall Test Results				Pass

  
 \_\_\_\_\_  
 Laboratory Technician


10/05/2020  
 \_\_\_\_\_  
 Test Date

  
 \_\_\_\_\_  
 Approved By



TEST DESC: LEFT KNEE  
VELOCITY: 6.97 ft/s, 2.12 m/s

TEST DATE: 10/05/2020  
TEST #: D202476

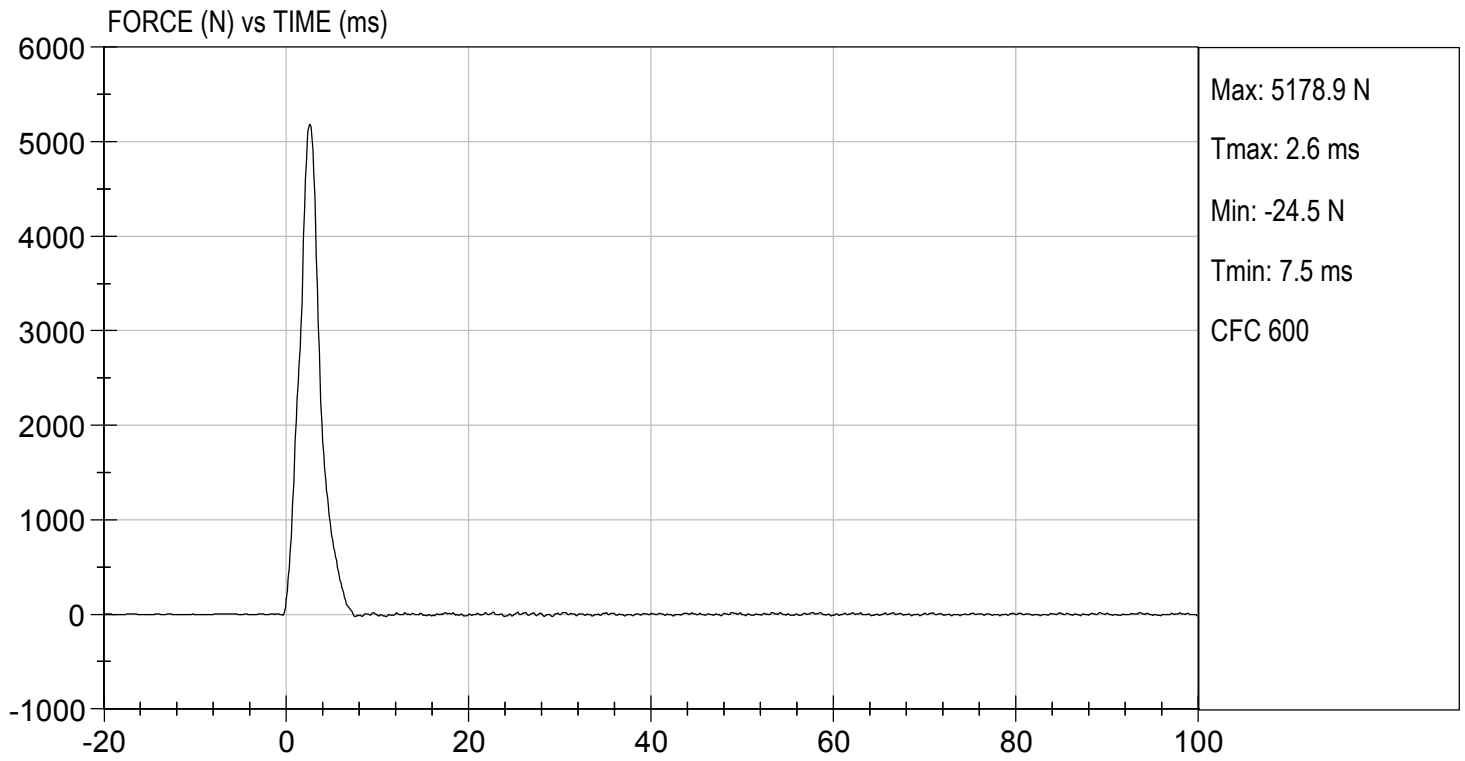

**MGA RESEARCH CORPORATION**  
**HIP-FEMUR FLEXION TEST**  
**HYBRID III 50TH PERCENTILE MALE**


**ATD Serial No:** 351


**Test I.D:** D202470


Tested Parameter	Units	Specification	Result		Pass/Fail
			Right	Left	
Laboratory Temperature	deg C	18.9 to 25.6	21.7	21.7	Pass
Laboratory Relative Humidity	%	10 to 70	29	29	Pass
Rotation Rate	deg/s	5.0 to 10.0	6.4	6.4	Pass
30 Degrees	Nm	94.9 Nm Max	83.2	85.4	Pass
150 ft-lbf / 203.4 Nm	Deg	40.0 to 50.0 Degree Max Rotation	45.6	45.2	Pass
Overall Test Results					Pass

  
 \_\_\_\_\_  
 Laboratory Technician

10/05/2020  
 \_\_\_\_\_  
 Test Date

  
 \_\_\_\_\_  
 Approved By

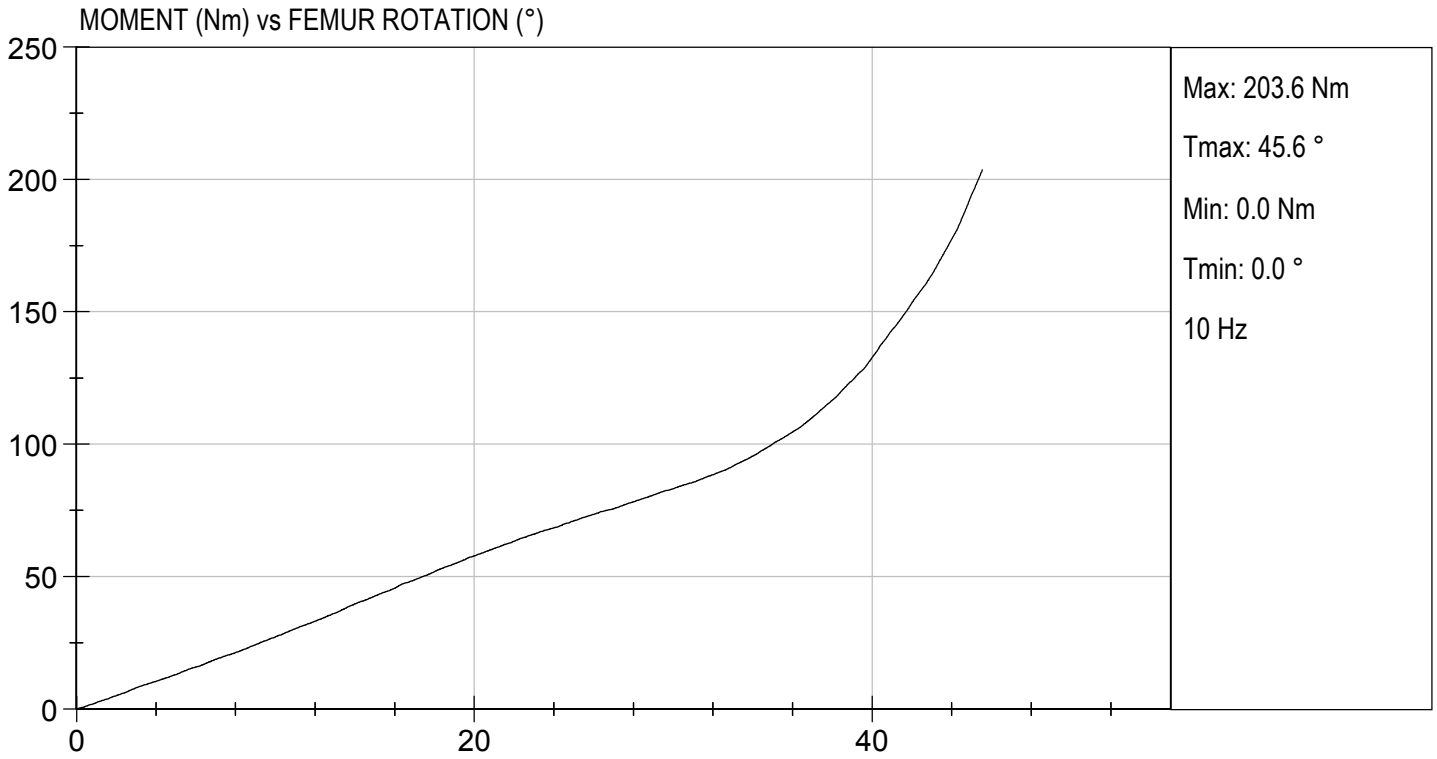

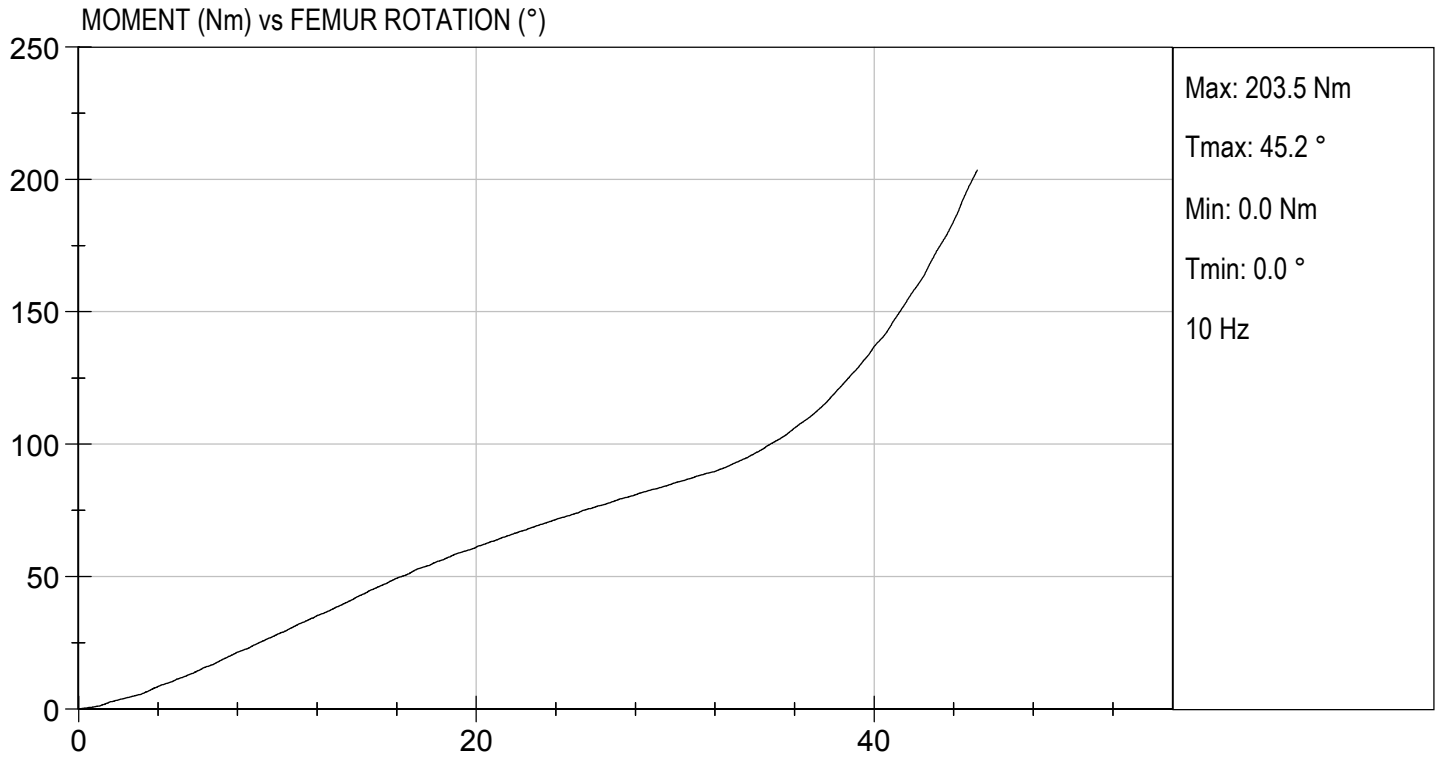

**CALIBRATION TEST RESULTS**

**POST-TEST**

**HYBRID III 50<sup>TH</sup> PERCENTILE MALE - DRIVER ATD**

**MGA RESEARCH CORPORATION**  
**HEAD DROP TEST**  
**HYBRID III 50TH PERCENTILE MALE**


ATD Serial No: 351



Test ID: D202691

Tested Parameter	Units	Specification	Result	Pass/Fail
Laboratory Temperature	deg C	18.9 to 25.6	21.2	Pass
Laboratory Relative Humidity	%	10 to 70	23	Pass
Peak Resultant Acceleration	G's	225 to 275	247	Pass
Peak Lateral Acceleration	G's	<= +/- 15.0	0.9	Pass
Unimodal	N/A	Yes	Yes	Pass
Oscillations	N/A	within 10% of peak	Yes	Pass
Overall Test Results				Pass



  
 \_\_\_\_\_  
 Laboratory Technician

10/27/2020  
 \_\_\_\_\_  
 Test Date

  
 \_\_\_\_\_  
 Approved By

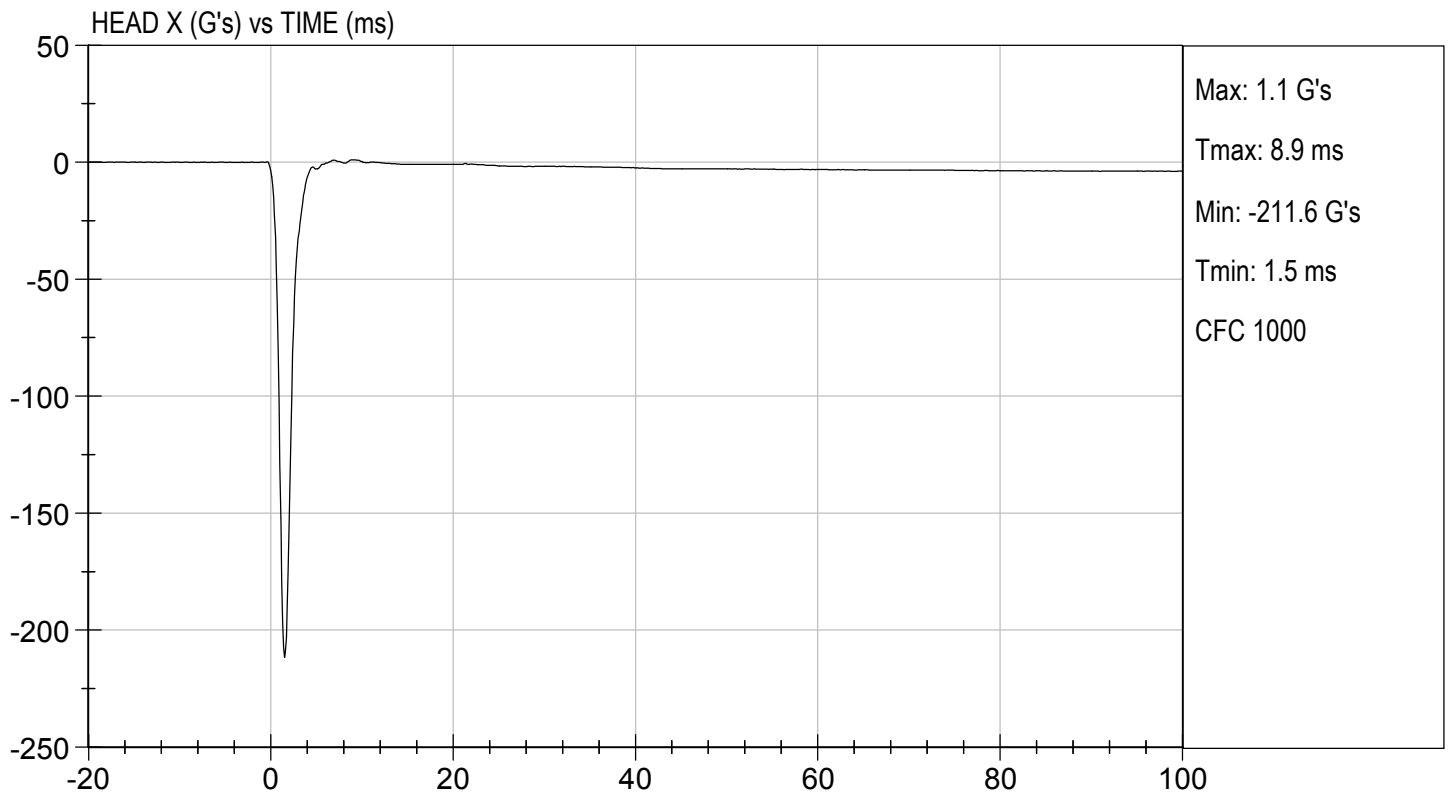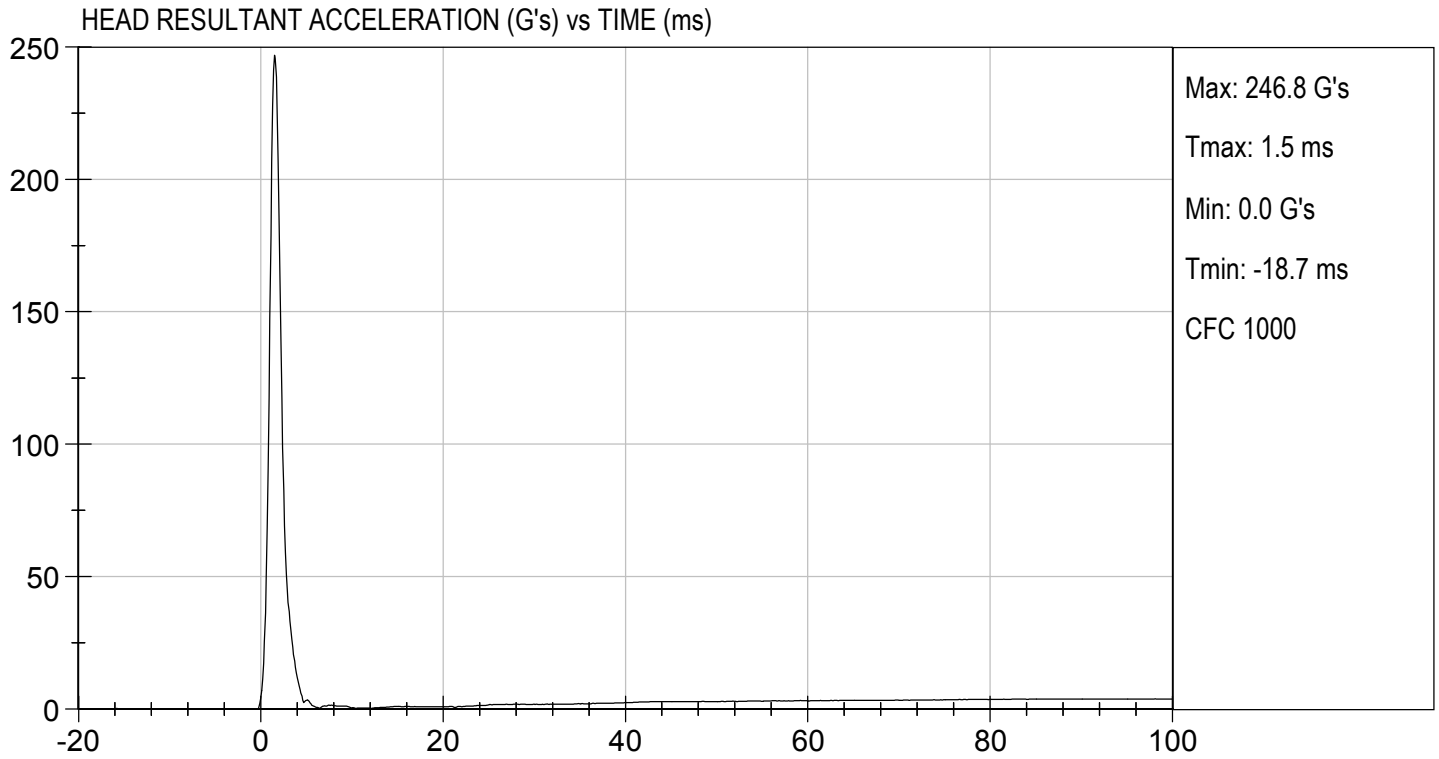



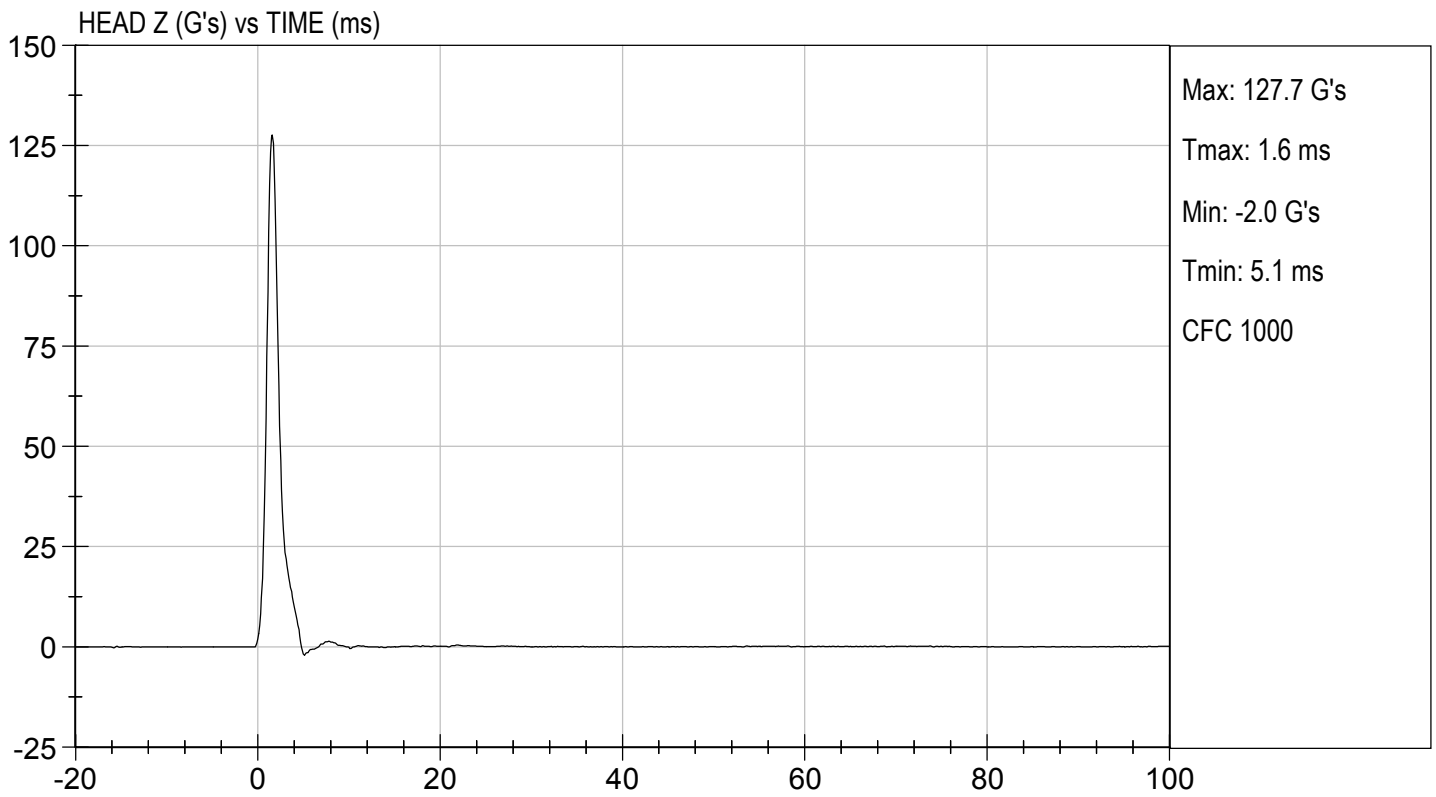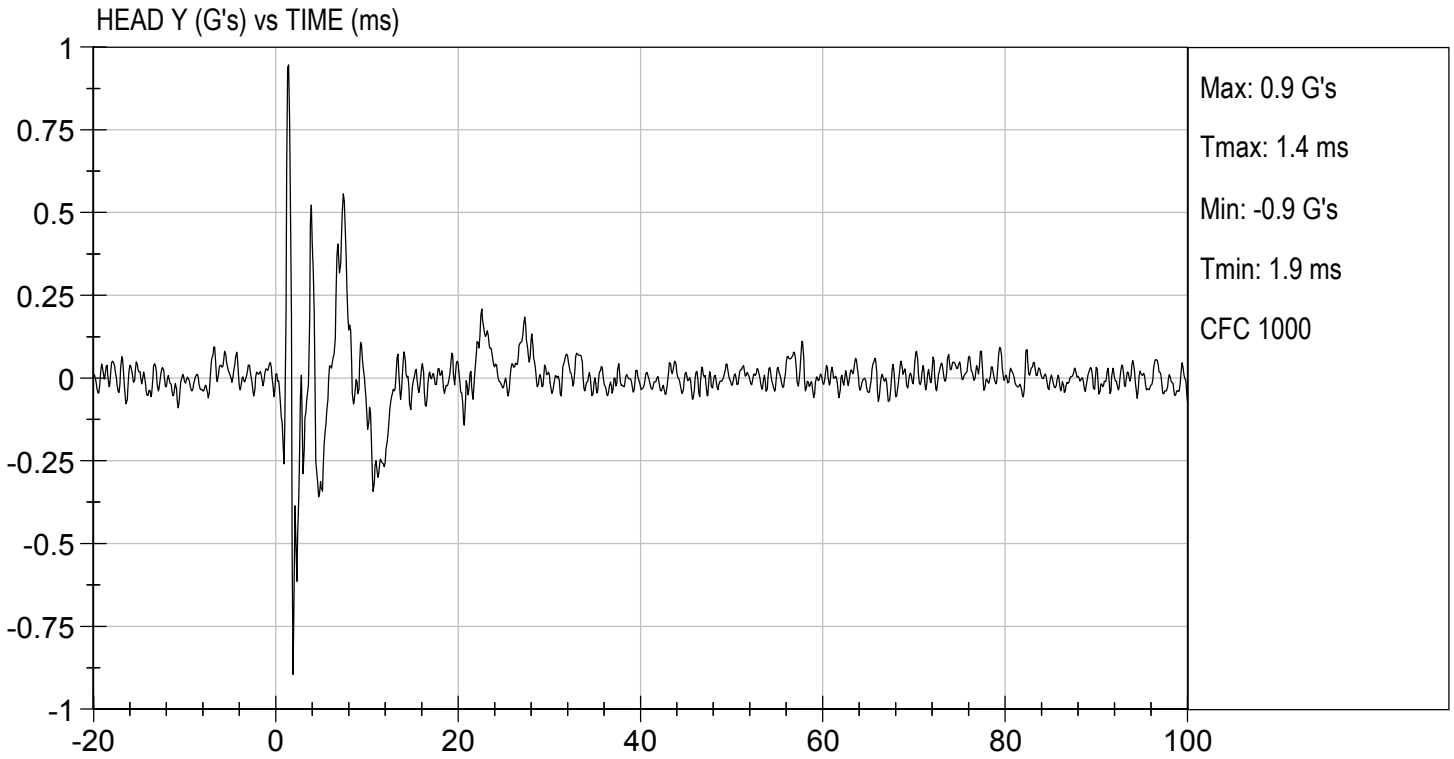

**MGA RESEARCH CORPORATION**  
**NECK FLEXION TEST**  
**HYBRID III 50TH PERCENTILE MALE**


ATD Serial No: 351



Test I.D.: D202692

Tested Parameter		Units	Specification	Result	Pass/Fail
Laboratory Temperature		deg C	20.6 to 22.2	21.7	Pass
Laboratory Relative Humidity		%	10 to 70	24	Pass
Pendulum Velocity		m/s	6.89 to 7.13	7.06	Pass
Pendulum Deceleration	10 ms	G's	22.50 to 27.50	23.56	Pass
	20 ms	G's	17.60 to 22.60	17.85	Pass
	30 ms	G's	12.50 to 18.50	14.15	Pass
Peak Pendulum Deceleration After 30 ms		G's	<= 29.0	14.6	Pass
Deceleration Decay Time to Cross 5 G's		ms	34.0 to 42.0	39.7	Pass
Maximum "D" Plane Rotation	Maximum	Deg	64.0 to 78.0	68.4	Pass
	Time	ms	57.0 to 64.0	60.4	Pass
"D" Plane Rotation Decay Time To Zero Crossing		ms	113.0 to 128.0	117.8	Pass
Moment About Occipital Condyle	Maximum	Nm	88.1 to 108.5	91.3	Pass
	Time	ms	47.0 to 58.0	51.2	Pass
Positive Moment Decay Time To Zero Crossing		ms	97.0 to 107.0	99.8	Pass
Overall Test Results					Pass

  
 \_\_\_\_\_  
 Laboratory Technician

10/27/2020  
 \_\_\_\_\_  
 Test Date


  
 \_\_\_\_\_  
 Approved By

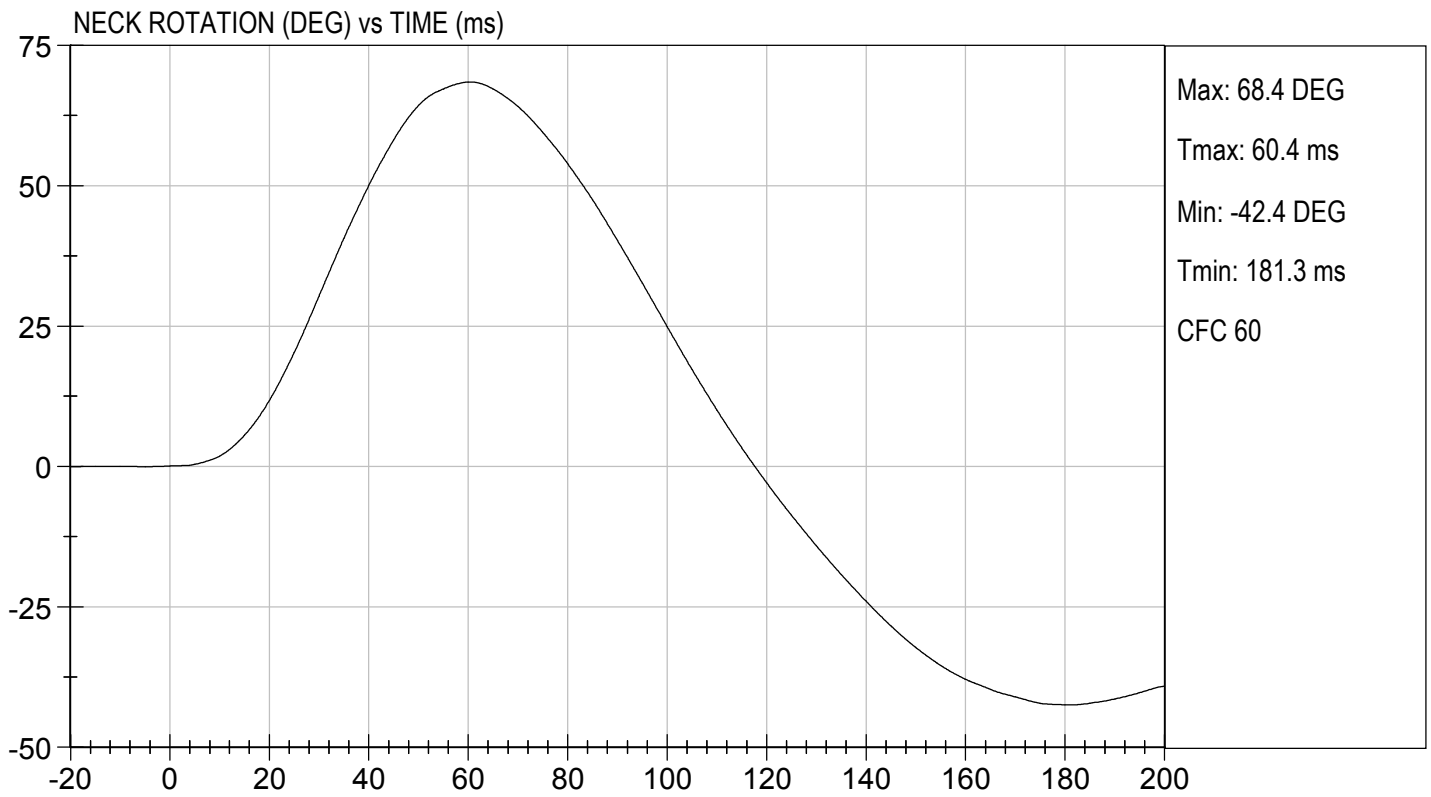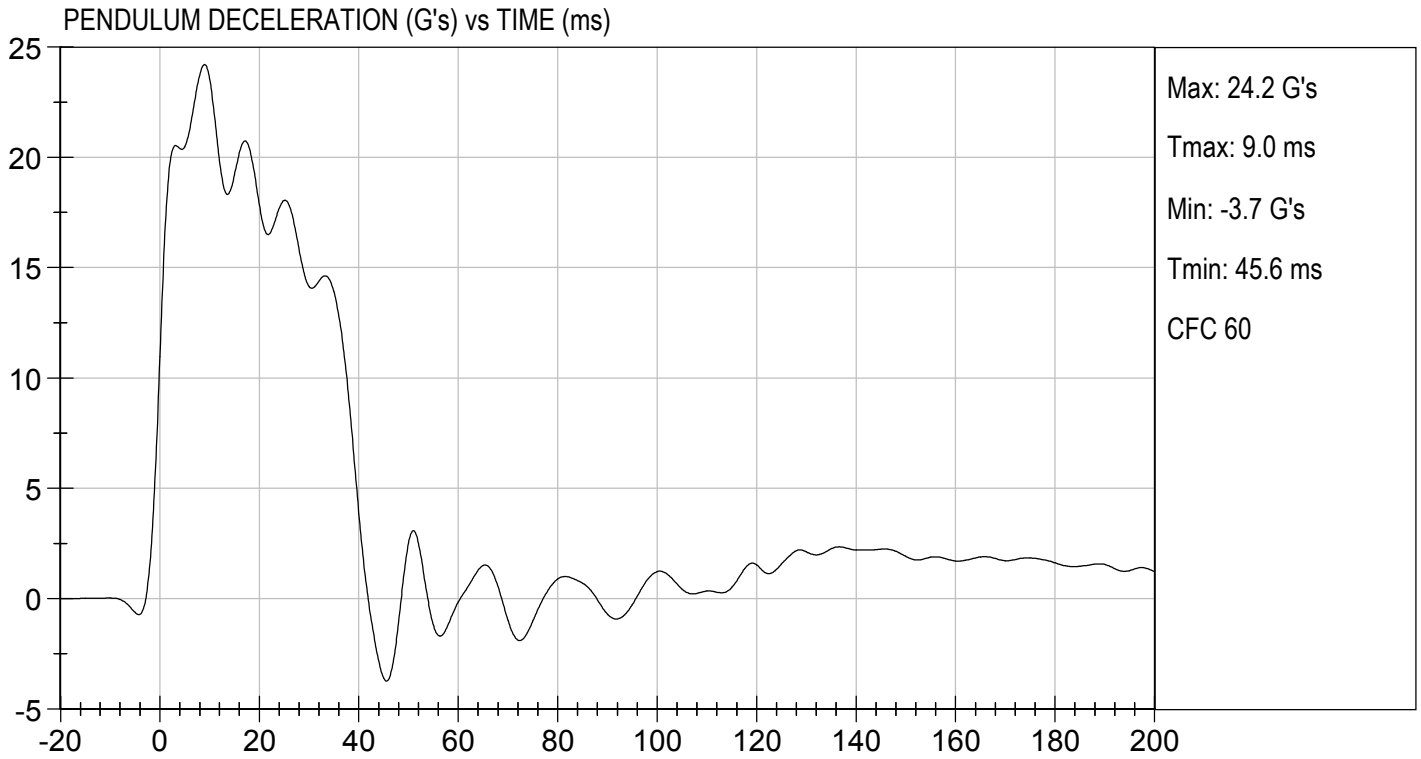



TEST DESC: NECK FLEXION  
VELOCITY: 23.15 ft/s, 7.06 m/s

TEST DATE: 10/27/2020  
TEST #: D202692

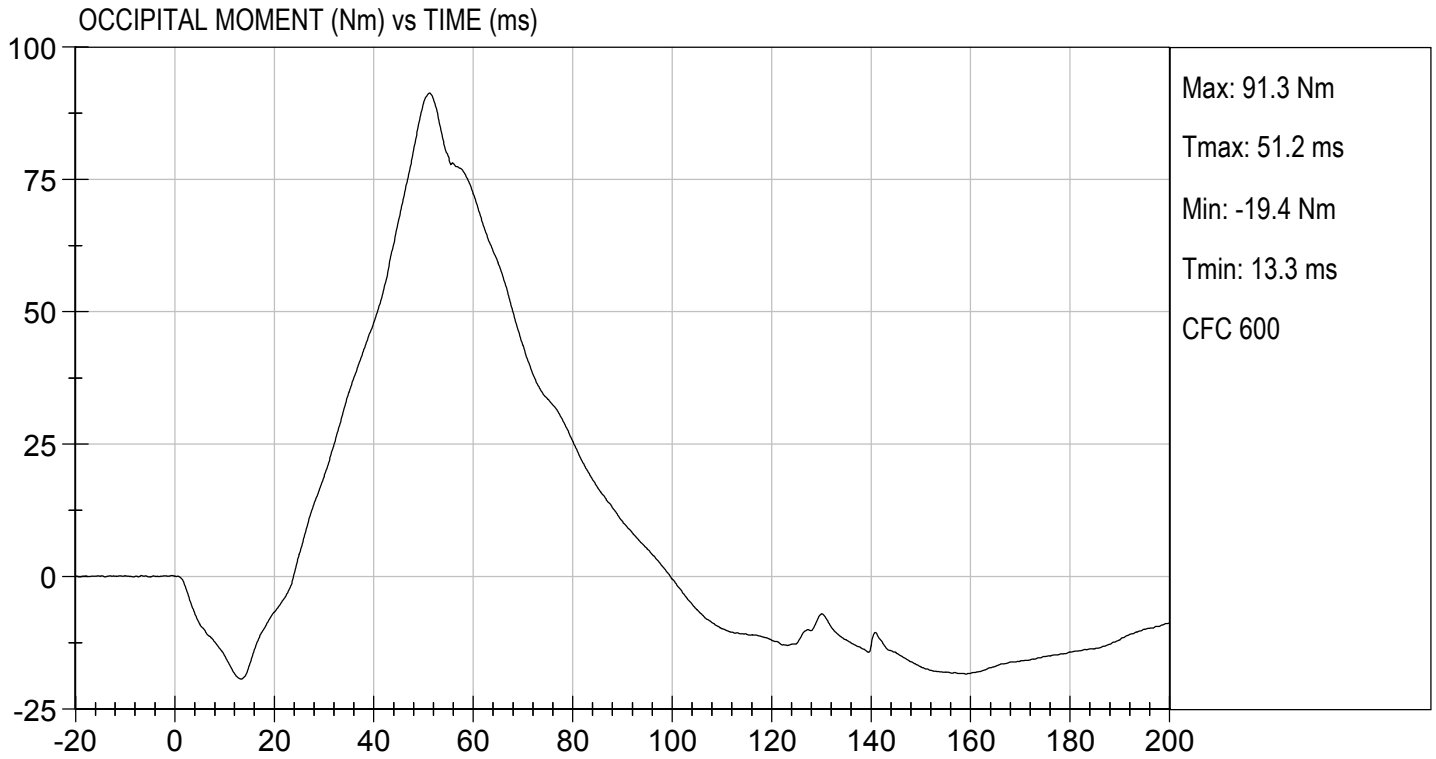

**MGA RESEARCH CORPORATION**  
**NECK EXTENSION TEST**  
**HYBRID III 50TH PERCENTILE MALE**

**ATD Serial No:** 351



**Test I.D.:** D202693

Tested Parameter		Units	Specification	Result	Pass/Fail
Laboratory Temperature		deg C	20.6 to 22.2	21.7	Pass
Laboratory Relative Humidity		%	10 to 70	24	Pass
Pendulum Velocity		m/s	5.95 to 6.19	6.19	Pass
Pendulum Deceleration	10 ms	G's	17.20 to 21.20	18.05	Pass
	20 ms	G's	14.00 to 19.00	14.55	Pass
	30 ms	G's	11.00 to 16.00	12.47	Pass
Peak Pendulum Deceleration After 30 ms		G's	<= 22.0	12.5	Pass
Deceleration Decay Time to Cross 5 G's		ms	38.0 to 46.0	43.3	Pass
Maximum "D" Plane Rotation	Maximum	Degrees	81.0 to 106.0	94.2	Pass
	Time	ms	72.0 to 82.0	78.1	Pass
"D" Plane Rotation Decay Time To Zero Crossing		ms	147.0 to 174.0	159.6	Pass
Moment About Occipital Condyle	Maximum	Nm	-52.9 to -79.9	-60.7	Pass
	Time	ms	65.0 to 79.0	72.2	Pass
Negative Moment Decay Time To Zero Crossing		ms	120.0 to 148.0	142.5	Pass
Overall Test Results					Pass

  
 \_\_\_\_\_  
 Laboratory Technician

10/27/2020  
 \_\_\_\_\_  
 Test Date

  
 \_\_\_\_\_  
 Approved By

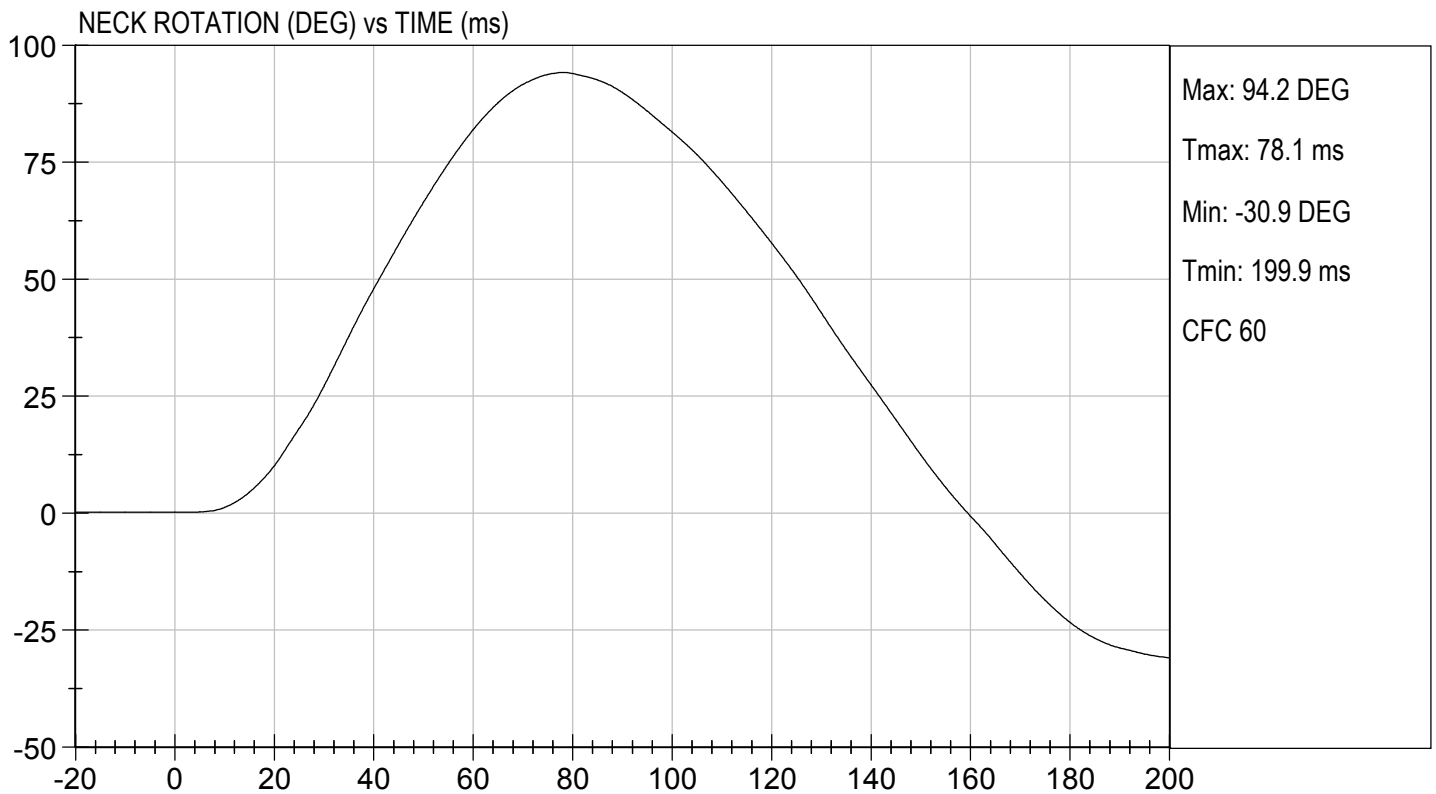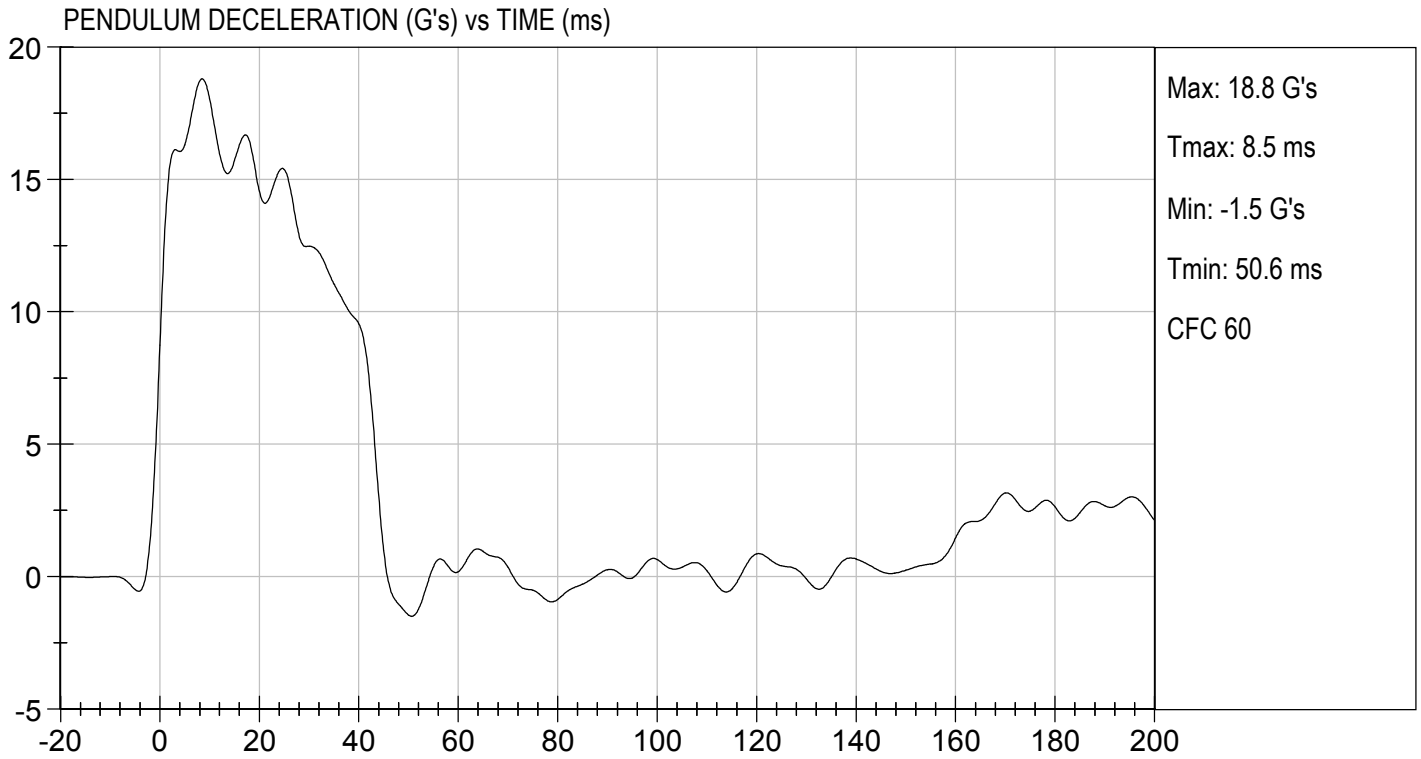



**MGA RESEARCH CORPORATION  
THORAX IMPACT  
HYBRID III 50TH PERCENTILE MALE**

**ATD Serial No:** 351

**Test I.D:** D202694


Tested Parameter	Units	Specification	Result	Pass/Fail
Laboratory Temperature	deg C	20.6 to 22.2	21.4	Pass
Laboratory Relative Humidity	%	10 to 70	27	Pass
Probe Velocity	m/s	6.58 to 6.82	6.68	Pass
Peak Probe Force	N	5159 to 5893	5,428	Pass
Peak Sternum Displacement	cm	6.35 to 7.26	7.13	Pass
Internal Hysteresis	%	69 to 85	70	Pass
<b>Overall Test Results</b>				<b>Pass</b>

  
 \_\_\_\_\_  
 Laboratory Technician

10/26/2020  
 Test Date

  
 \_\_\_\_\_  
 Approved By



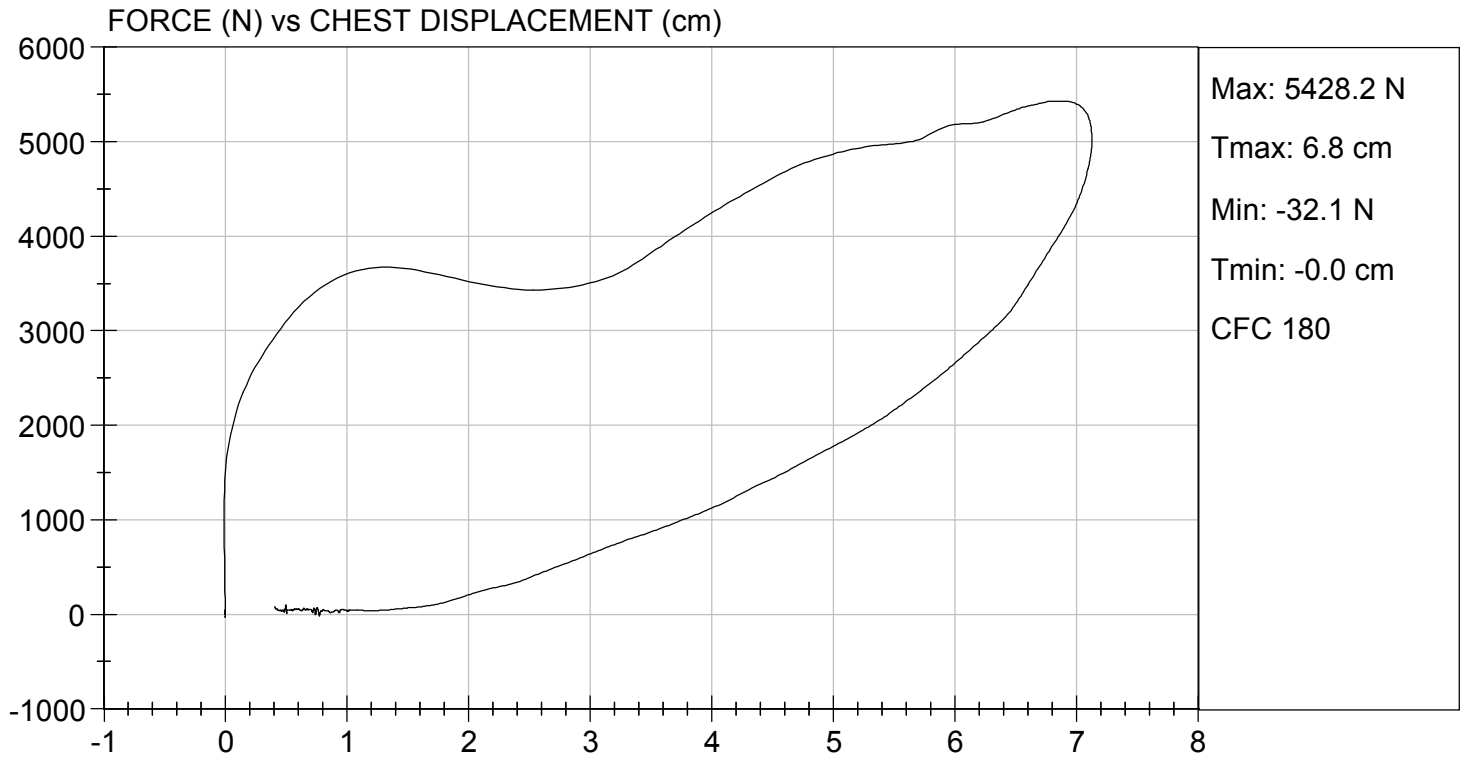

**MGA RESEARCH CORPORATION**  
**RIGHT KNEE IMPACT TEST**  
**HYBRID III 50TH PERCENTILE MALE**


ATD Serial No: 351

Test I.D: D202695

Tested Parameter	Units	Specification	Result	Pass/Fail
Laboratory Temperature	deg C	18.9 to 25.6	21.2	Pass
Laboratory Relative Humidity	%	10 to 70	23	Pass
Probe Velocity	m/s	2.07 to 2.13	2.10	Pass
Peak Probe Force	N	4715 to 5782	4,737	Pass
Overall Test Results				Pass

  
 \_\_\_\_\_  
 Laboratory Technician


10/27/2020  
 \_\_\_\_\_  
 Test Date

  
 \_\_\_\_\_  
 Approved By



TEST DESC: RIGHT KNEE  
VELOCITY: 6.89 ft/s, 2.10 m/s

TEST DATE: 10/27/2020  
TEST #: D202695

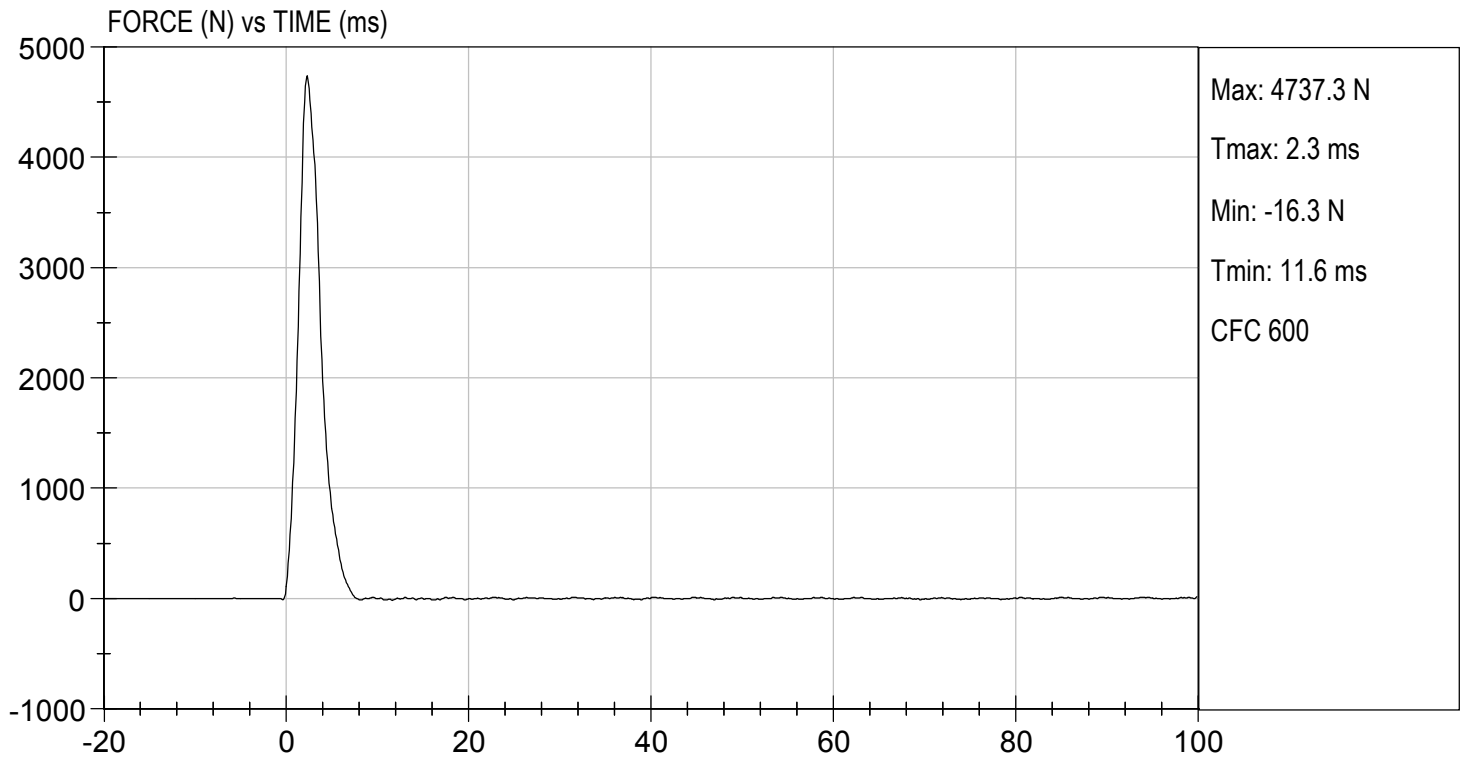

**MGA RESEARCH CORPORATION**  
**LEFT KNEE IMPACT TEST**  
**HYBRID III 50TH PERCENTILE MALE**


ATD Serial No: 351

Test I.D: D202696

Tested Parameter	Units	Specification	Result	Pass/Fail
Laboratory Temperature	deg C	18.9 to 25.6	21.2	Pass
Laboratory Relative Humidity	%	10 to 70	23	Pass
Probe Velocity	m/s	2.07 to 2.13	2.09	Pass
Peak Probe Force	N	4715 to 5782	4,749	Pass
Overall Test Results				Pass

  
 \_\_\_\_\_  
 Laboratory Technician


10/27/2020  
 \_\_\_\_\_  
 Test Date

  
 \_\_\_\_\_  
 Approved By



TEST DESC: LEFT KNEE  
VELOCITY: 6.86 ft/s, 2.09 m/s

TEST DATE: 10/27/2020  
TEST #: D202696

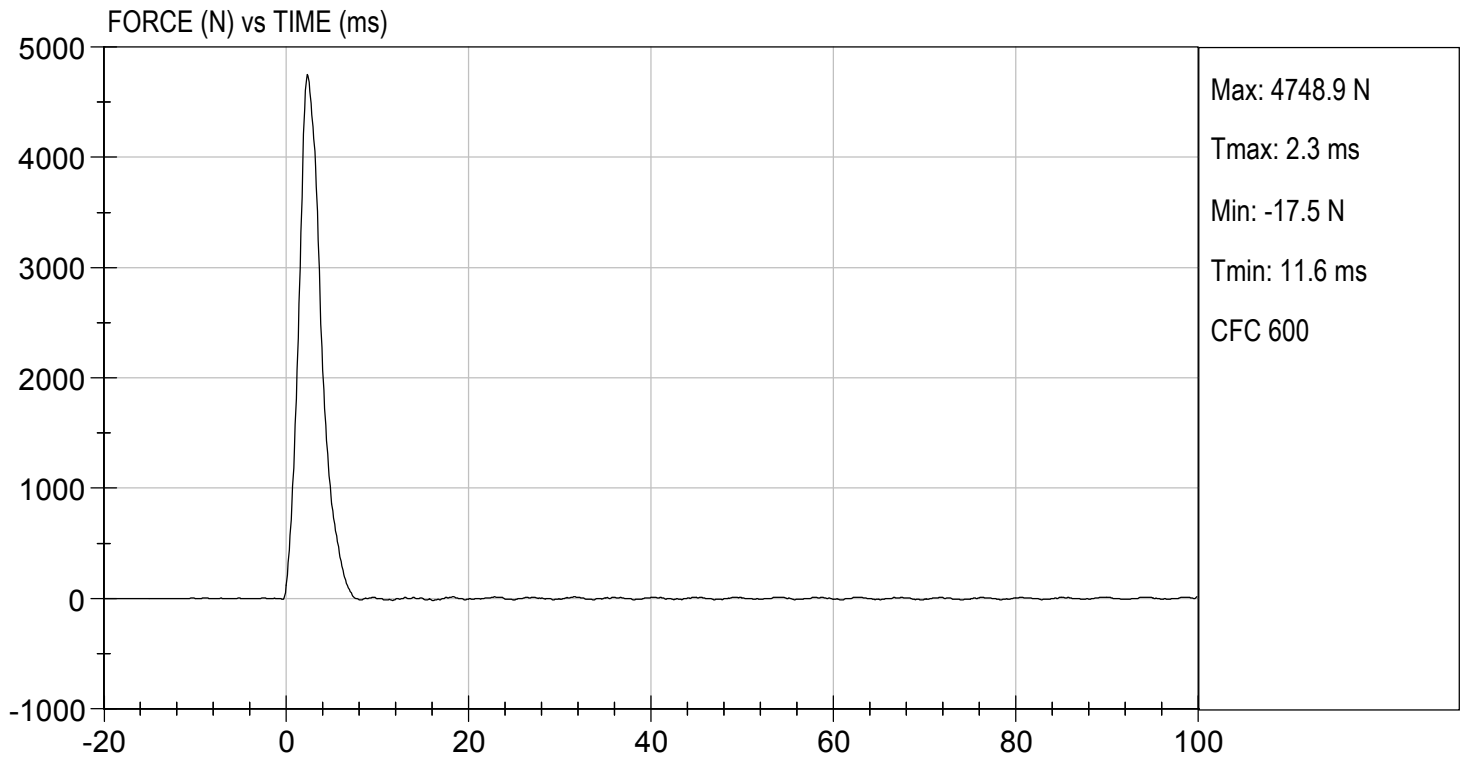

**MGA RESEARCH CORPORATION**  
**HIP-FEMUR FLEXION TEST**  
**HYBRID III 50TH PERCENTILE MALE**


**ATD Serial No:** 351


**Test I.D:** D202690


Tested Parameter	Units	Specification	Result		Pass/Fail
			Right	Left	
Laboratory Temperature	deg C	18.9 to 25.6	21.2	21.2	Pass
Laboratory Relative Humidity	%	10 to 70	23	23	Pass
Rotation Rate	deg/s	5.0 to 10.0	6.4	6.4	Pass
30 Degrees	Nm	94.9 Nm Max	87.6	83.4	Pass
150 ft-lbf / 203.4 Nm	Deg	40.0 to 50.0 Degree Max Rotation	44.8	44.3	Pass
Overall Test Results					Pass

  
 \_\_\_\_\_  
 Laboratory Technician

10/27/2020  
 \_\_\_\_\_  
 Test Date

  
 \_\_\_\_\_  
 Approved By

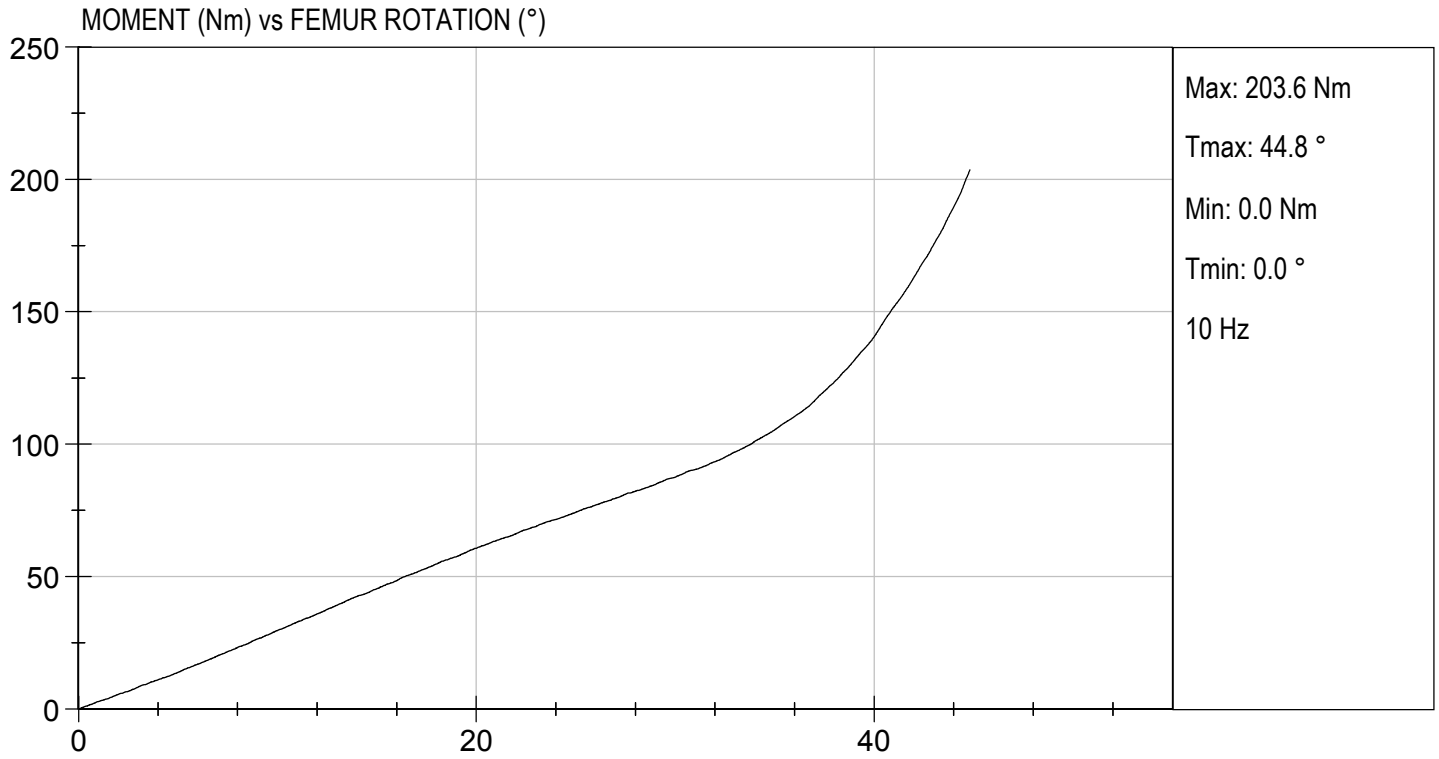

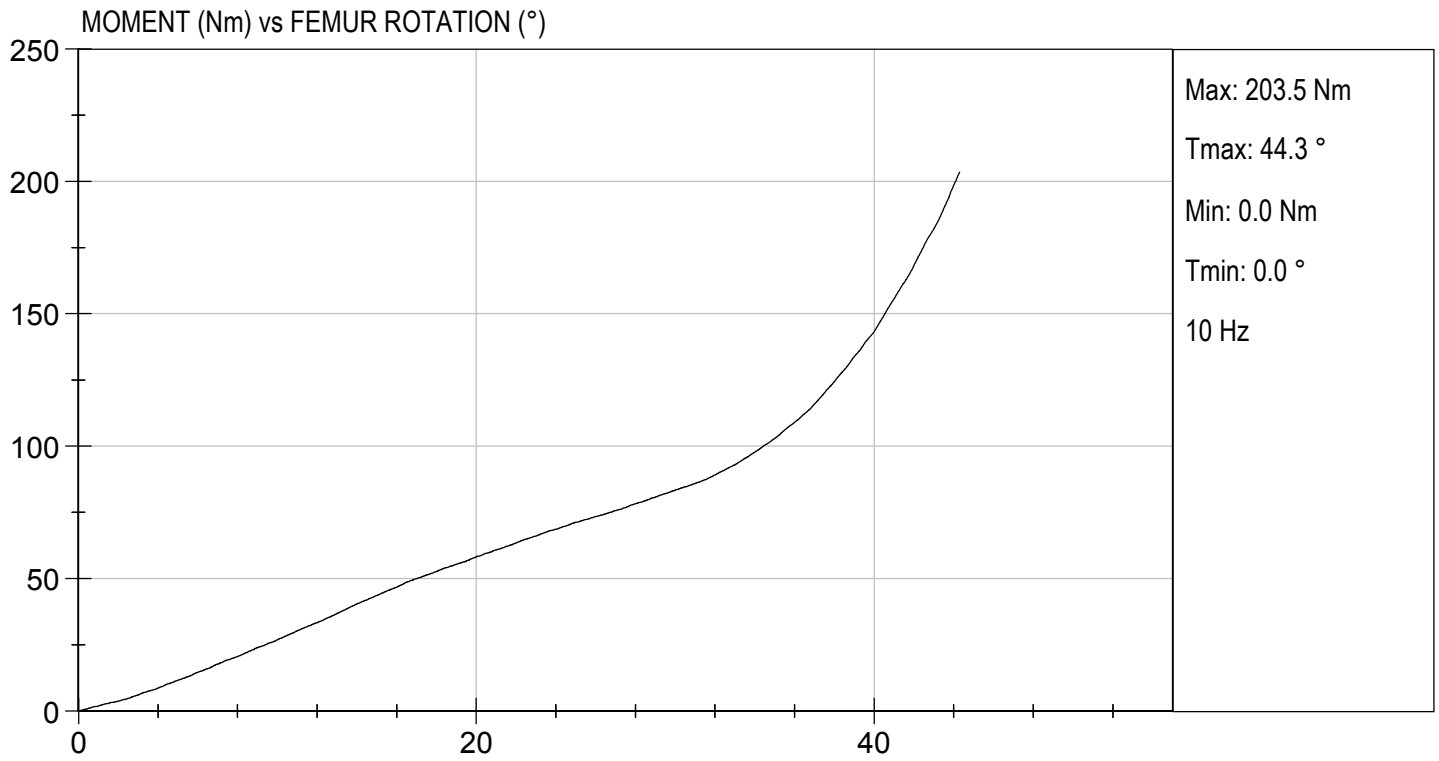



**CALIBRATION TEST RESULTS**

**PRE-TEST**

**HYBRID III 5<sup>TH</sup> PERCENTILE FEMALE - PASSENGER ATD**

**Hybrid III, 5<sup>th</sup> External Measurements  
SN: DH1659**

HYBRID III, PART 572, SUBPART O EXTERNAL DIMENSIONS				
DIMENSION	DESCRIPTION	DETAILS	ASSEMBLY DIMENSION (mm)	ACTUAL MEASUREMENT
A	TOTAL SITTING HEIGHT	Seat surface to highest point on top of the head.	774.7-800.1	778
B	SHOULDER PIVOT HEIGHT	Centerline of shoulder pivot bolt to the seat surface.	431.8-457.2	440
C	H-POINT HEIGHT	Reference	81.3-86.3	85
D	H-POINT LOCATION FROM BACKLINE	Reference	144.8-149.8	147
E	SHOULDER PIVOT FROM BACKLINE	Center of the shoulder clevis to the rear vertical surface of the fixture.	68.6-83.8	82
F	THIGH CLEARANCE	Measured at the highest point on the upper femur segment.	119.4-134.6	130
G	BACK OF ELBOW TO WRIST PIVOT	back of the elbow flesh to the wrist pivot in line with the elbow and wrist pivots	243.9-259.1	251
H	HEAD BACK TO BACKLINE	Back of Skull cap skin to seat rear vertical surface (Reference)	43.2-48.2	45
I	SHOULDER TO- ELBOW LENGTH	Measure from the highest point on top of the shoulder clevis to the lowest part of the flesh on the elbow in line with the elbow pivot bolt.	276.8-297.2	285
J	ELBOW REST HEIGHT	Measure from the flesh below the elbow pivot bolt to the seat surface.	182.8-203.2	189
K	BUTTOCK TO KNEE LENGTH	The forward most part of the knee flesh to the rear vertical surface of the fixture.	520.7-546.1	543
L	POPLITEAL HEIGHT	Seat surface to the plane of the horizontal plane of the bottom of the feet.	355.6-376	357
M	KNEE PIVOT HEIGHT	Centerline of knee pivot bolt to the horizontal plane of the bottom of the feet.	393.7-419.1	398
N	BUTTOCK POPLITEAL LENGTH	The rearmost surface of the lower leg to the same point on the rear surface of the buttocks used for dim. "K".	414-439.4	435

HYBRID III, SUBPART O EXTERNAL DIMENSIONS, continued				
DIMENSION	DESCRIPTION	DETAILS	ASSEMBLY DIMENSION (mm)	ACTUAL MEASUREMENT
O	CHEST DEPTH WITHOUT JACKET	Measured 304.8 ± 5.1 mm above seat surface	175.3-190.5	182
P	FOOT LENGTH	Tip of toe to rear of heel	218.5-233.7	221
Q	STANDING HEIGHT	(THEORETICAL)	1501.1	N/A
R	BUTTOCK TO KNEE PIVOT LENGTH	The rear surface of the buttocks to the knee pivot bolt	457.2-482.6	469
S	HEAD BREADTH	The widest part of the head	137.1-147.3	141
T	HEAD DEPTH	Back of the head to the forehead	177.8-188	182
U	HIP BREADTH	The widest part of the hip	299.7-314.9	306
V	SHOULDER BREADTH	Outside edges of right and left shoulder clevises	350.5-365.7	357
W	FOOT BREADTH	The widest part of the foot	78.8-94	83
X	HEAD CIRCUMFERENCE	Measured at the point as in dim. "T"	528.3-548.7	542
Y	CHEST CIRCUMFERENCE (WITH CHEST JACKET)	Measured 345.4 ± 12.7 mm above seat surface	850.9-881.3	865
Z	WAIST CIRCUMFERENCE	Measured 165.1 ± 5.1 mm above seat surface	759.5-789.9	785
AA	REFERENCE LOCATION FOR MEASUREMENT OF CHEST CIRCUMFERENCE	Reference	332.7-358.1	345
BB	REFERENCE LOCATION FOR MEASUREMENT OF WAIST CIRCUMFERENCE	Reference	160.1-170.2	165

**MGA RESEARCH CORPORATION  
HEAD DROP TEST  
HYBRID III 5TH PERCENTILE**


**ATD Serial No:**       DH1659      



**Test ID:**       D202481      



Tested Parameter	Units	Specification	Result	Pass/Fail
Laboratory Temperature	deg C	18.9 to 25.6	21.7	Pass
Laboratory Relative Humidity	%	10 to 70	29	Pass
Peak Resultant Acceleration	G's	250 to 300	290	Pass
Peak Lateral Acceleration	G's	<= +/- 15.0	8.5	Pass
Unimodal	N/A	Yes	Yes	Pass
Oscillations	N/A	within 10% of peak	Yes	Pass
<b>Overall Test Results</b>				<b>Pass</b>

  
\_\_\_\_\_  
Laboratory Technician

10/05/2020  
\_\_\_\_\_  
Test Date

  
\_\_\_\_\_  
Approved By

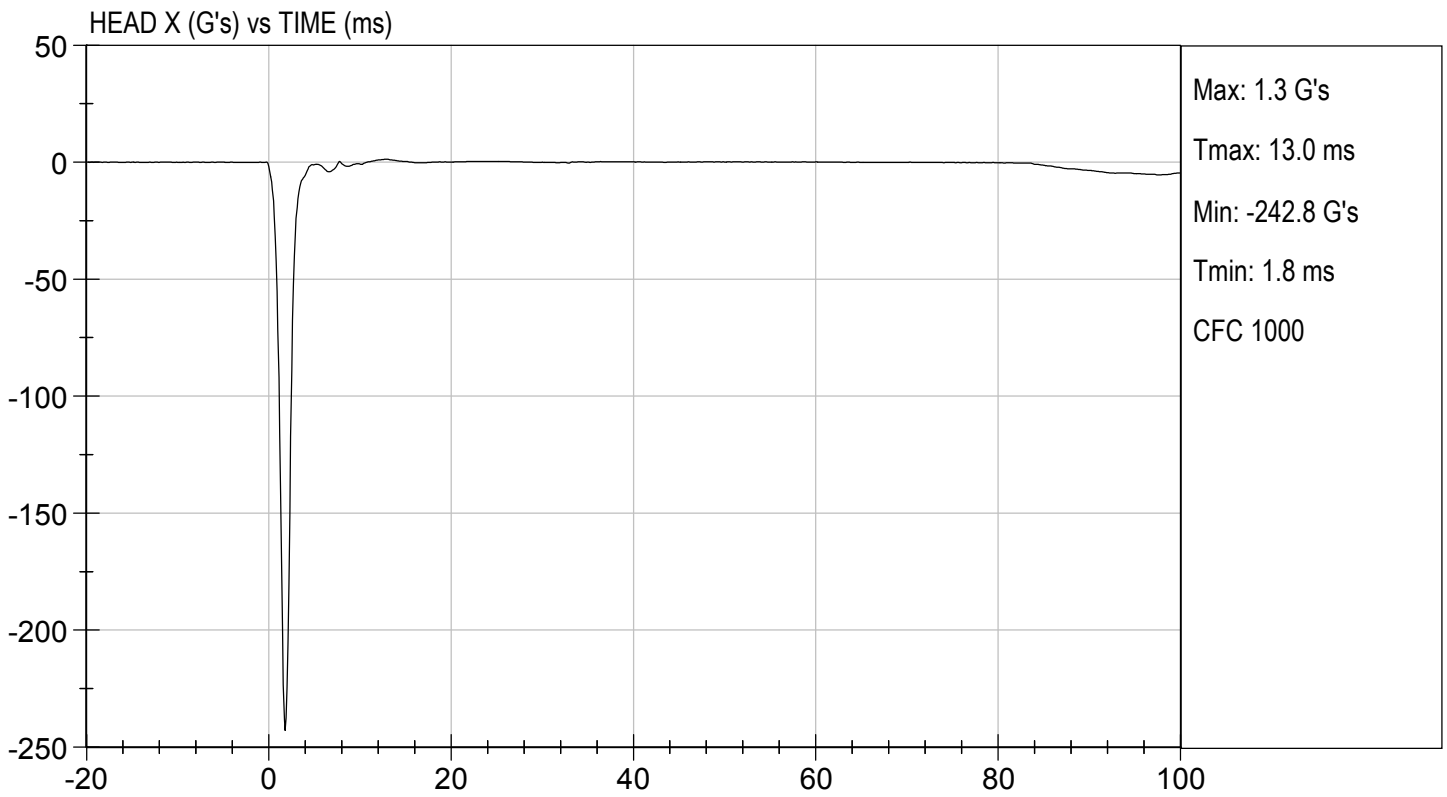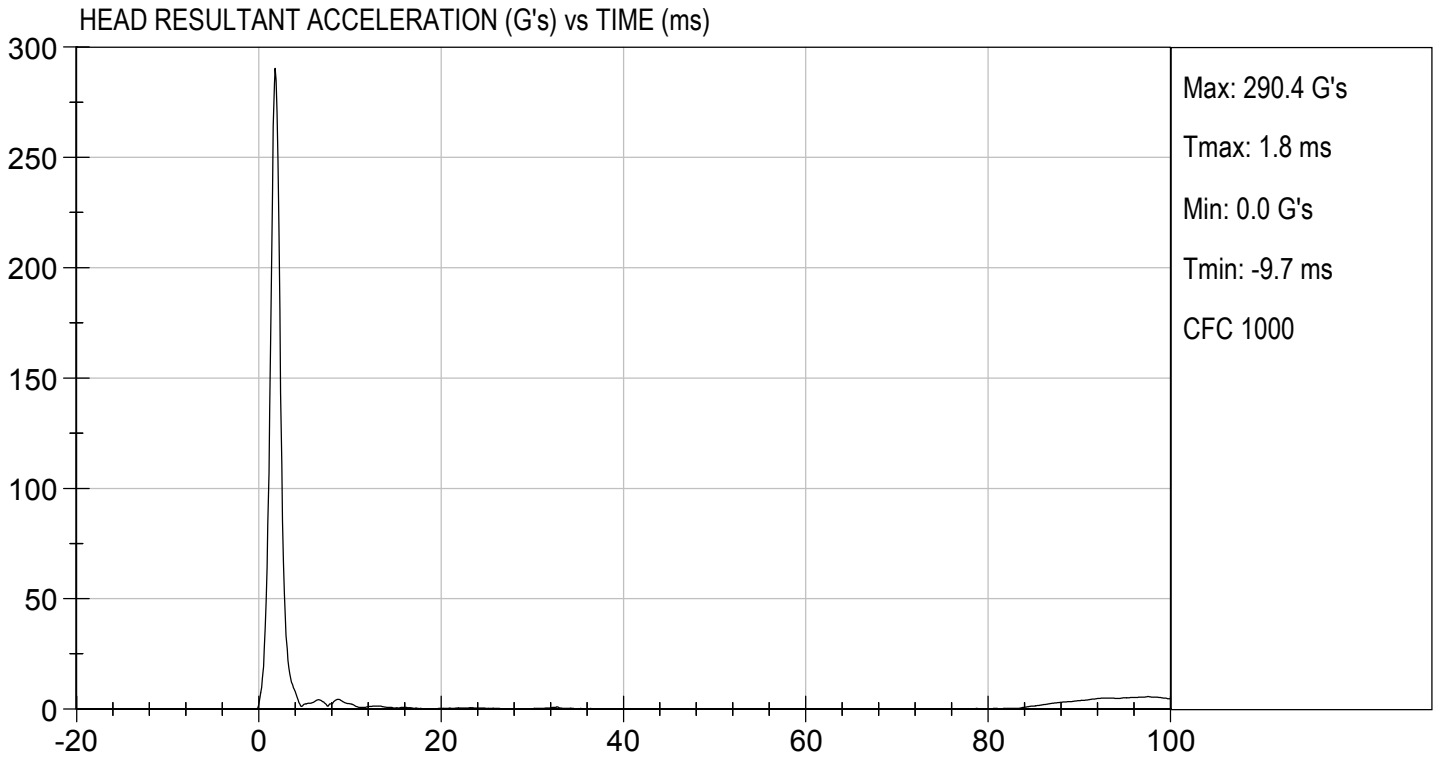

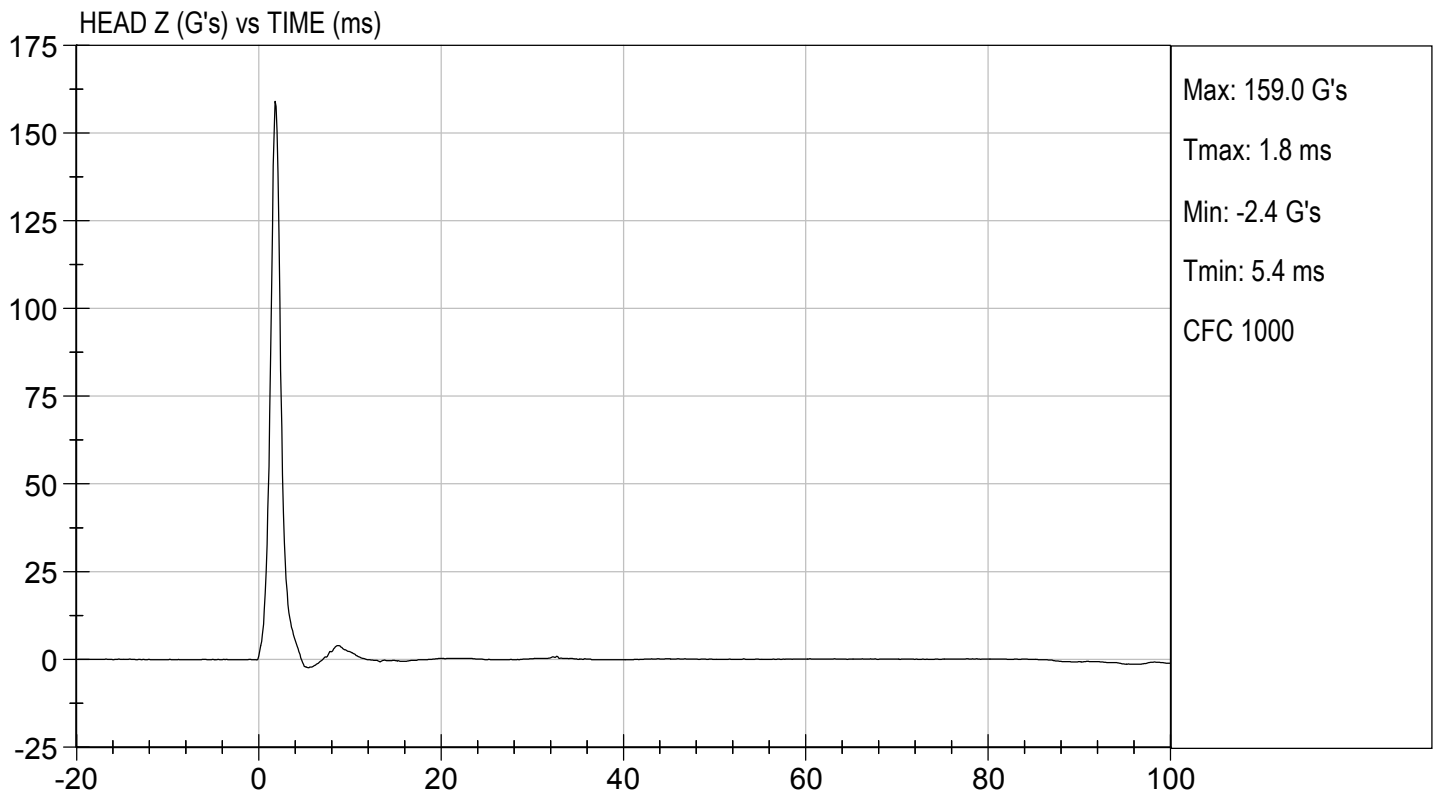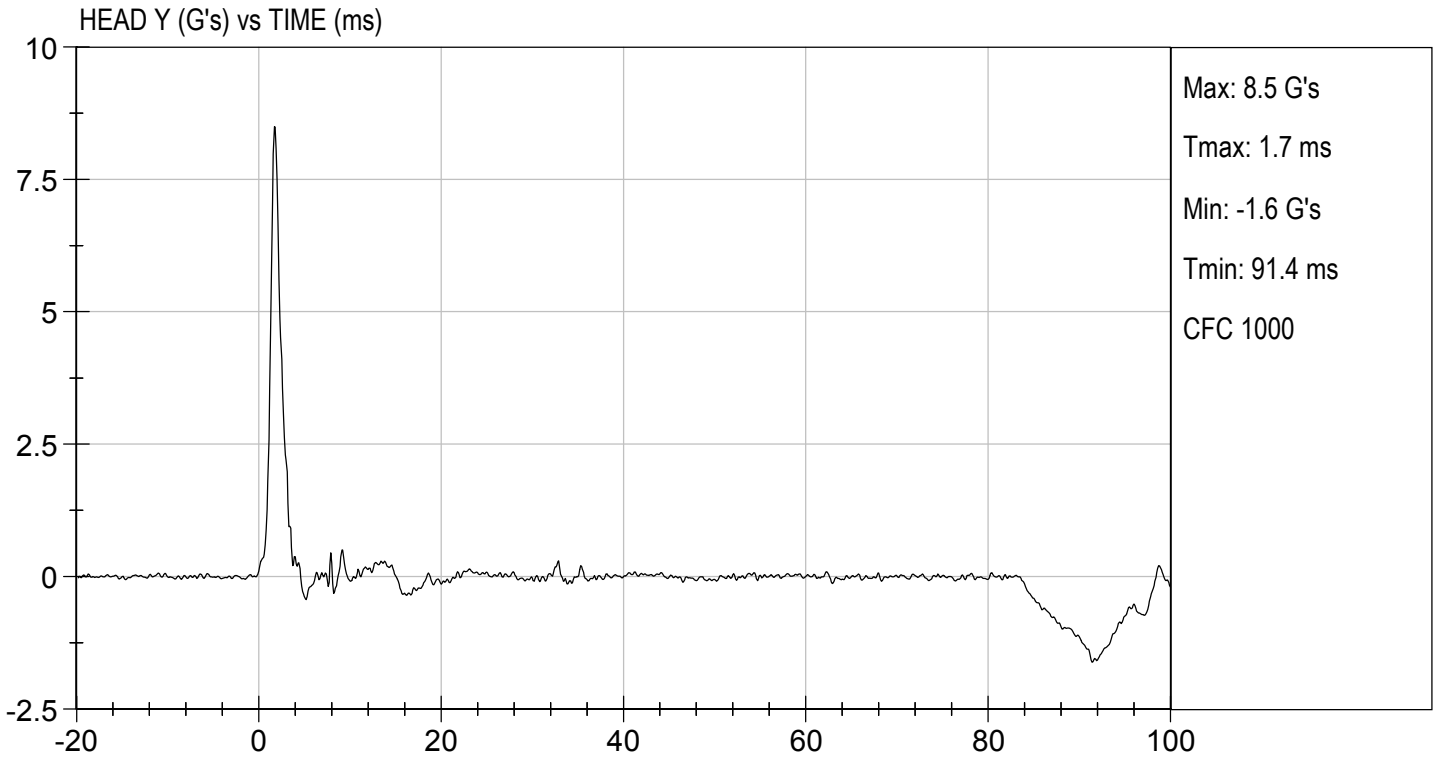

**MGA RESEARCH CORPORATION**

**NECK FLEXION TEST**

**HYBRID III 5TH PERCENTILE**


ATD Serial No:           DH1659          



Test I.D.:           D202482          

Tested Parameter		Units	Specification	Result	Pass/Fail
Laboratory Temperature		deg C	20.6 to 22.2	21.7	Pass
Laboratory Relative Humidity		%	10 to 70	29	Pass
Pendulum Speed		m/s	6.89 to 7.13	7.06	Pass
Pendulum Velocity	10 ms	m/s	2.1 to 2.5	2.4	Pass
	20 ms	m/s	4.0 to 5.0	4.8	Pass
	30 ms	m/s	5.8 to 7.0	6.9	Pass
D Plane Rotation	Max	deg	77 to 91	85	Pass
Occipital Condyle Moment within Rotation Corridor		Nm	69 to 83	74	Pass
Positive Moment Time Curve Decay to 10 Nm		ms	80 to 100	84	Pass
Overall Results					Pass


\_\_\_\_\_  
Laboratory Technician

\_\_\_\_\_  
10/05/2020  
Test Date

  
\_\_\_\_\_  
Approved By

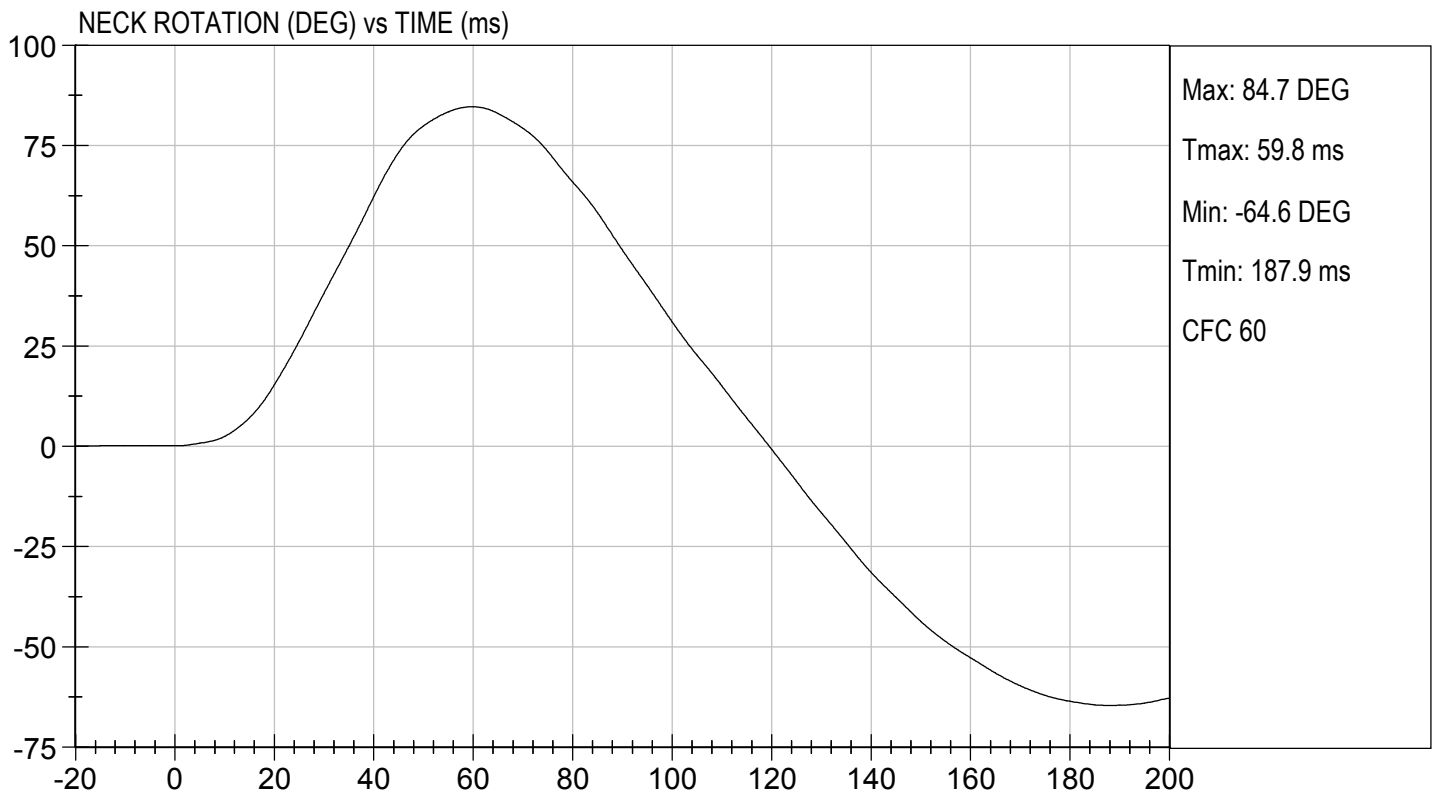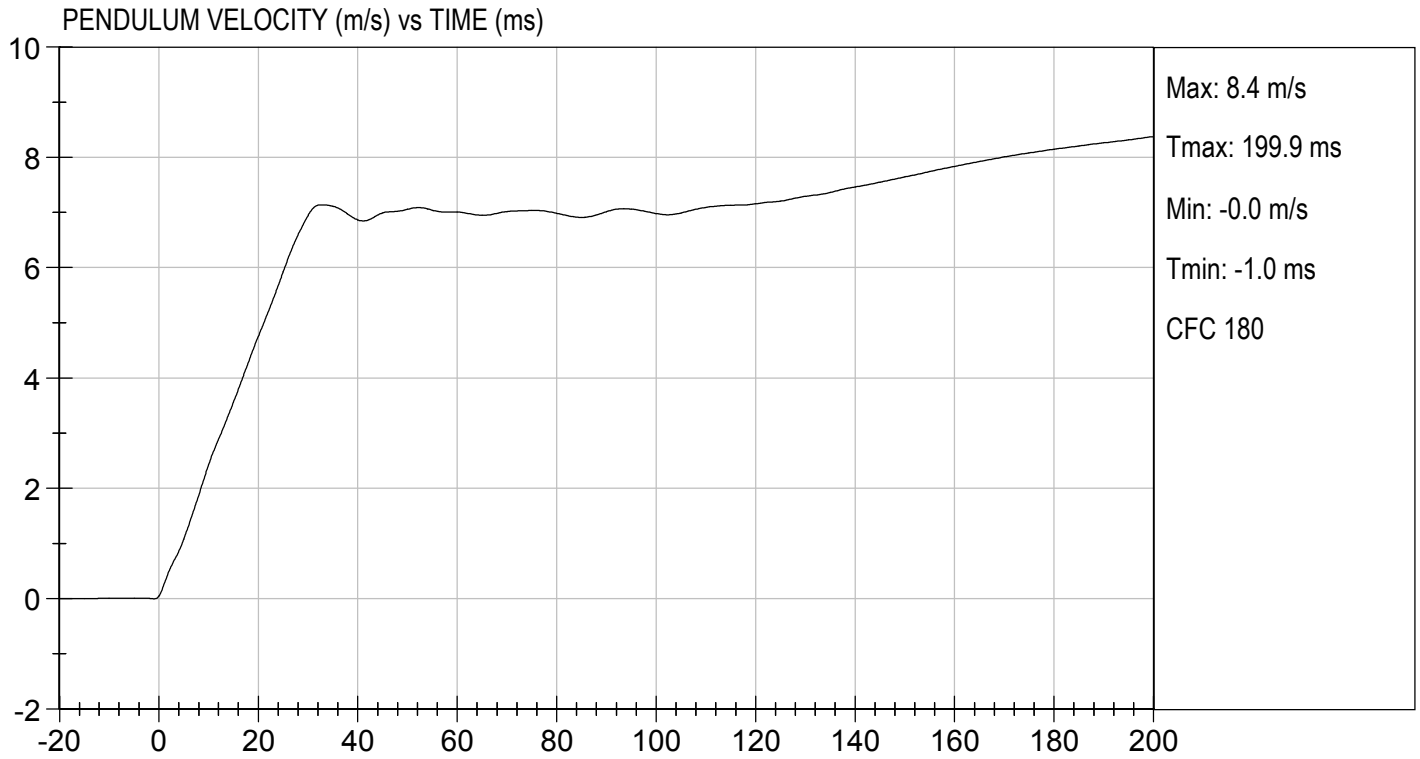



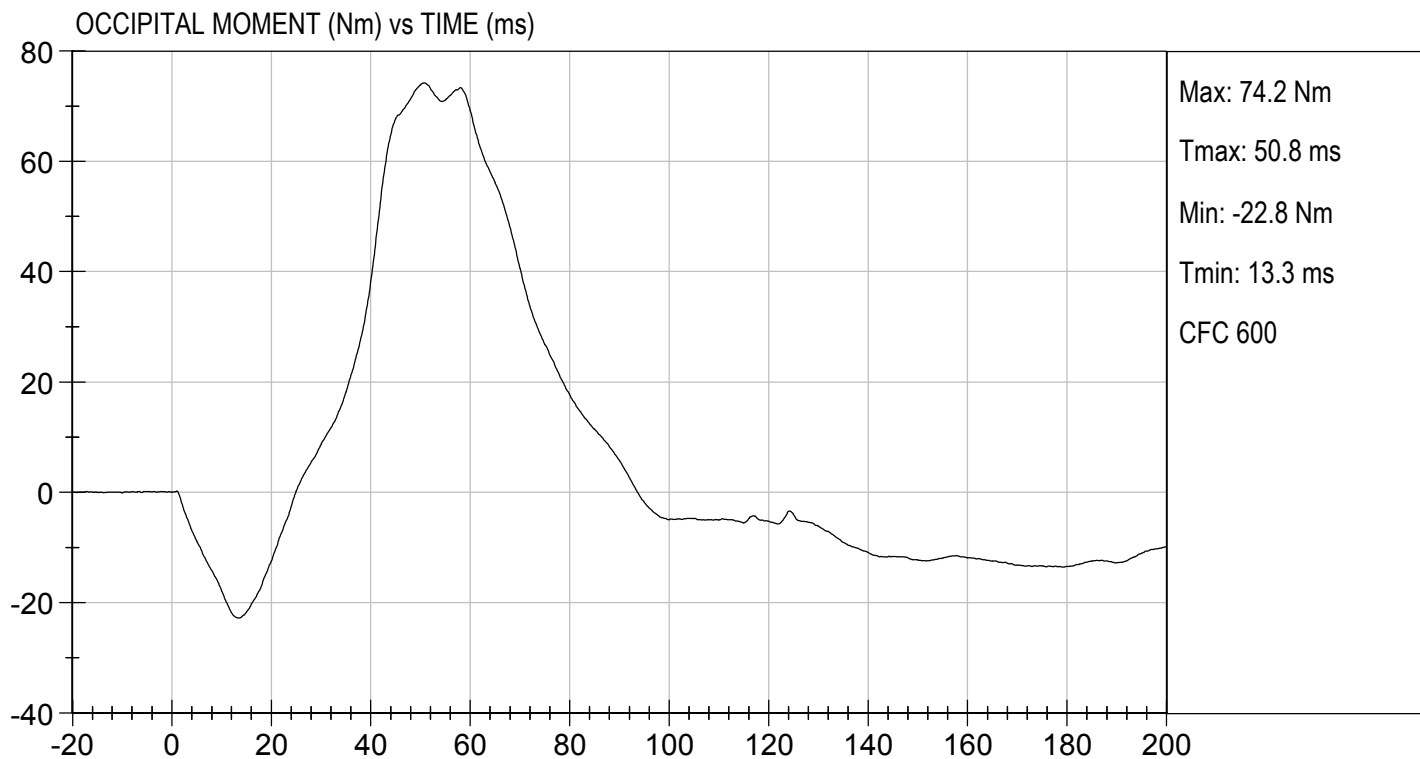

**MGA RESEARCH CORPORATION**  
**NECK EXTENSION TEST**  
**HYBRID III 5TH PERCENTILE**


ATD Serial No:           DH1659          



Test I.D:           D202483          


Tested Parameter		Units	Specification	Result	Pass/Fail
Laboratory Temperature		deg C	20.6 to 22.2	21.2	Pass
Laboratory Relative Humidity		%	10 to 70	31	Pass
Pendulum Speed		m/s	5.95 to 6.19	6.12	Pass
Pendulum Velocity	10 ms	m/s	1.5 to 1.9	1.7	Pass
	20 ms	m/s	3.1 to 3.9	3.6	Pass
	30 ms	m/s	4.6 to 5.6	5.5	Pass
D Plane Rotation	Max	deg	99 to 114	105	Pass
Occipital Condyle Moment within Rotation Corridor		Nm	-65 to -53	-54	Pass
Negative Moment Time Curve Decay to -10 Nm		ms	94 to 114	104	Pass
Overall Results					Pass

  
 \_\_\_\_\_  
 Laboratory Technician

10/06/2020  
 \_\_\_\_\_  
 Test Date

  
 \_\_\_\_\_  
 Approved By

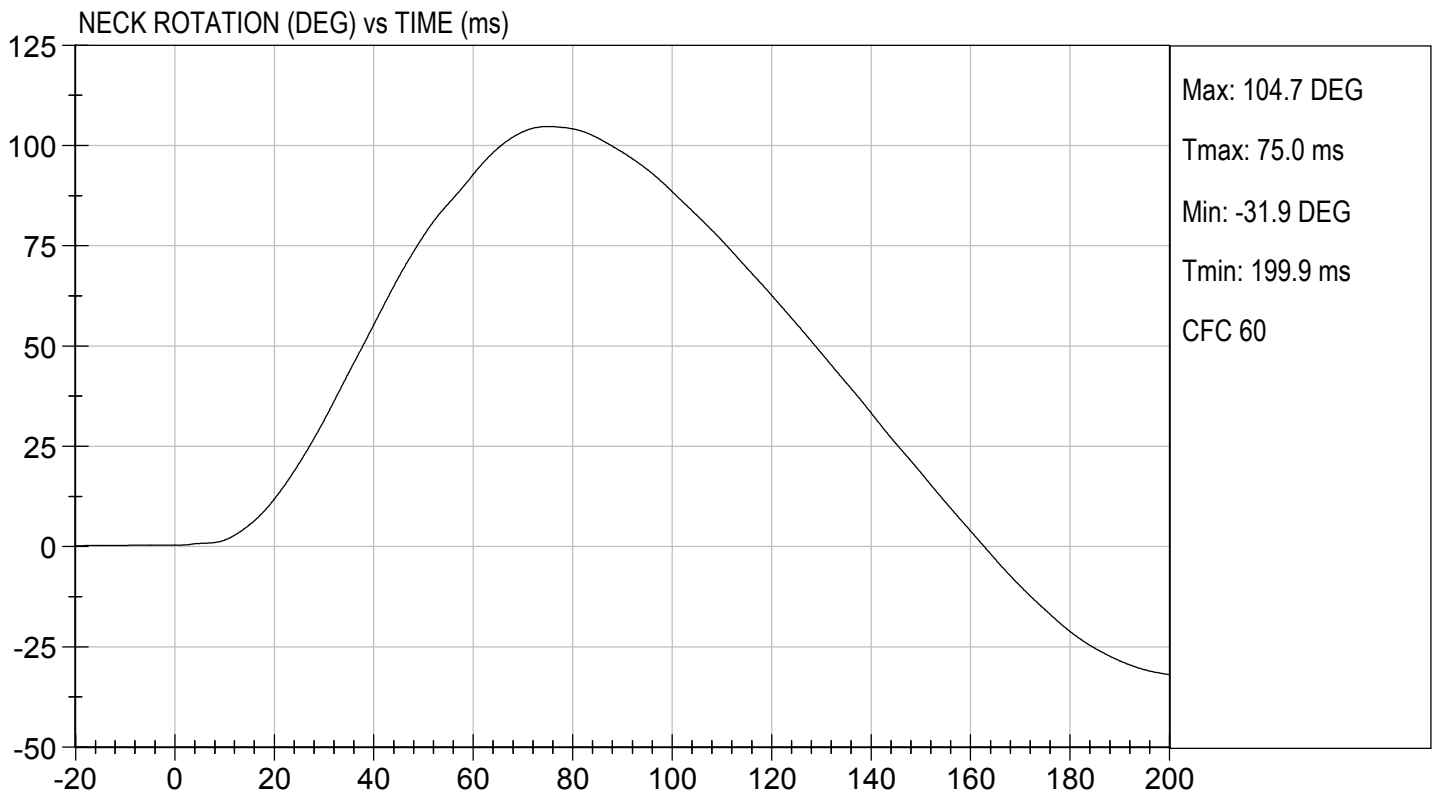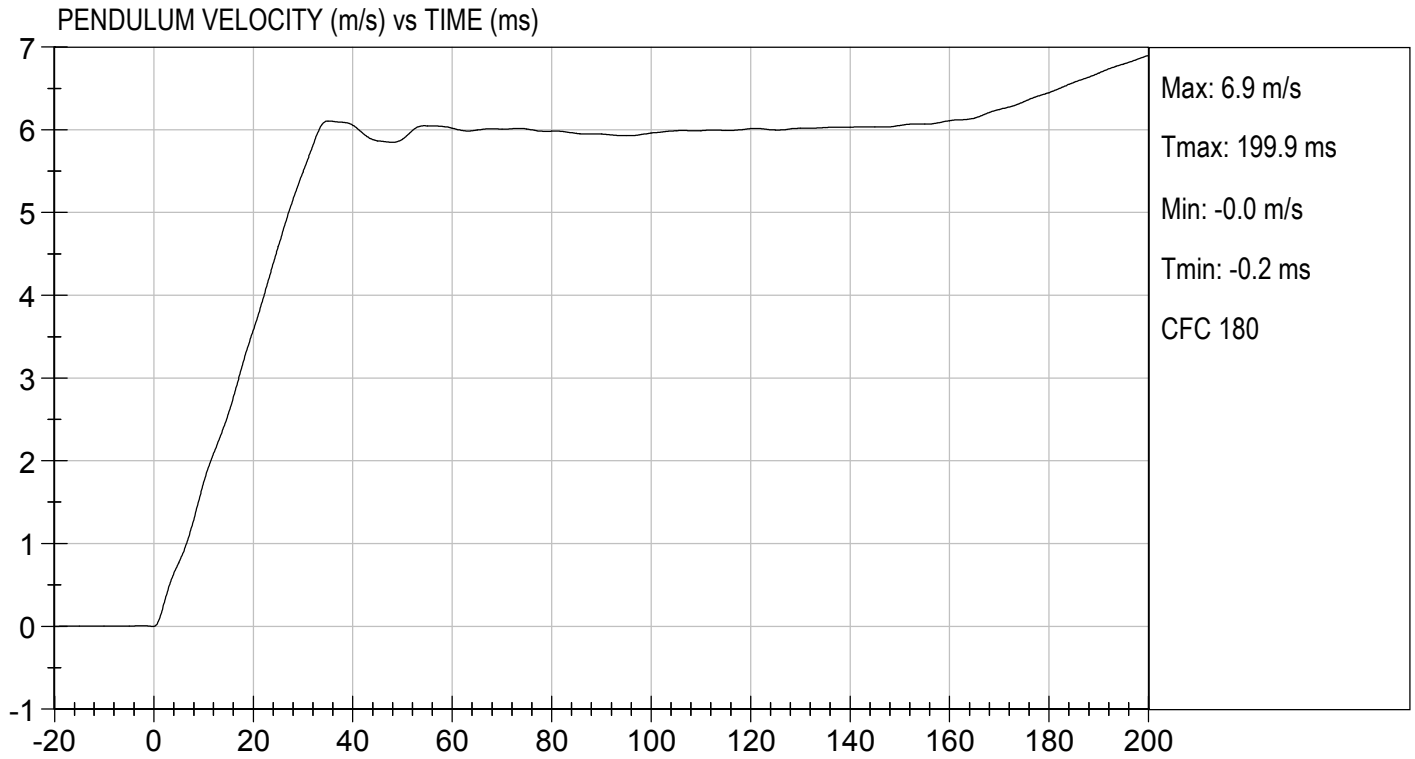

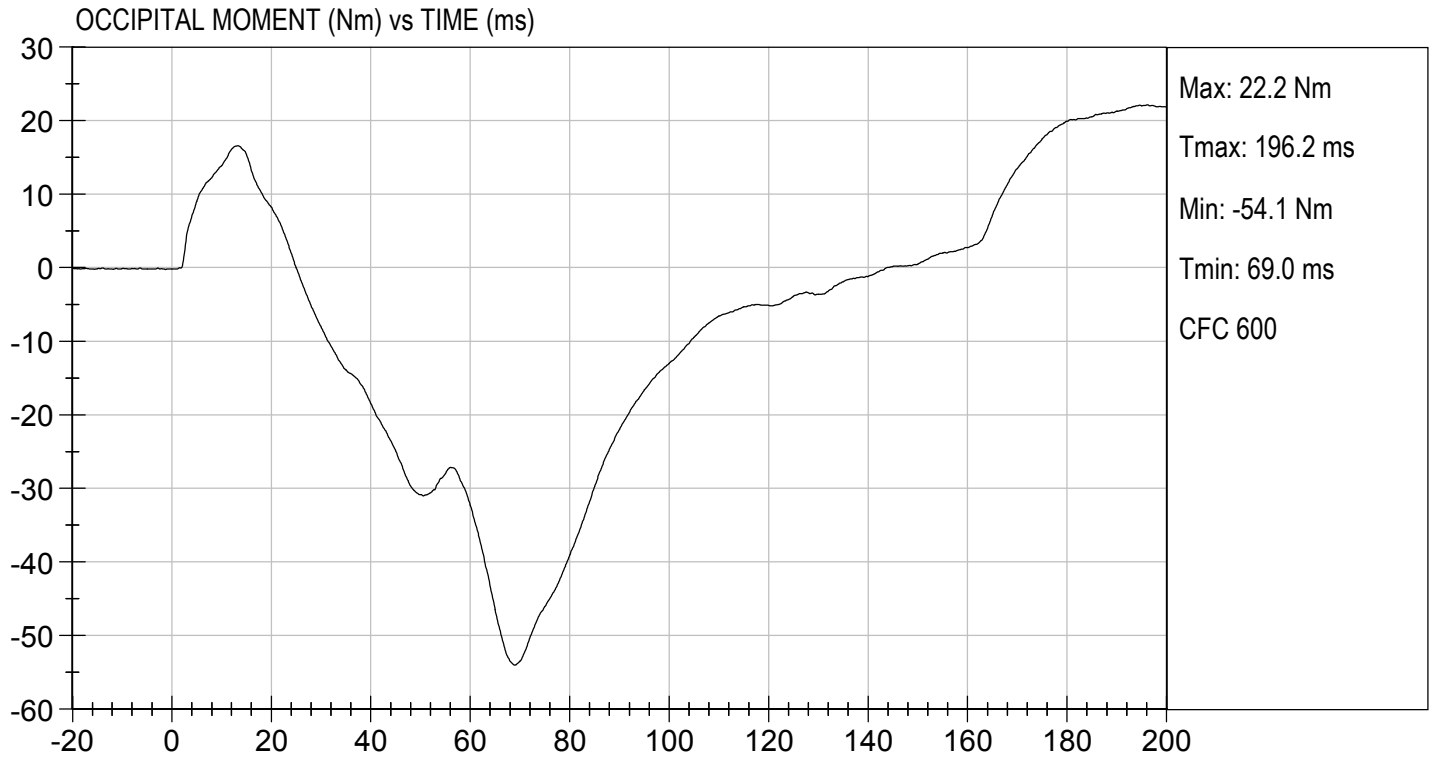

**MGA RESEARCH CORPORATION**  
**THORAX IMPACT**  
**HYBRID III 5TH PERCENTILE**

**ATD Serial No:**           DH1659          

**Test I.D:**           D202484          


Tested Parameter	Units	Specification	Result	Pass/Fail
Temperature	deg C	20.6 to 22.2	21.6	Pass
Relative Humidity	%	10 to 70	30	Pass
Probe Speed	m/s	6.59 to 6.83	6.77	Pass
Peak Deflection	mm	50 to 58	52	Pass
Peak Resistive Force w/in Deflection Corridor	N	3900 to 4400	4290	Pass
Internal Hysteresis	%	69 to 85	73	Pass
Peak Force 18 mm - 50 mm	N	<= 4600	4293	Pass
<b>Overall Test Results</b>				<b>Pass</b>




\_\_\_\_\_  
Laboratory Technician

10/05/2020

\_\_\_\_\_  
Test Date



\_\_\_\_\_  
Approved By

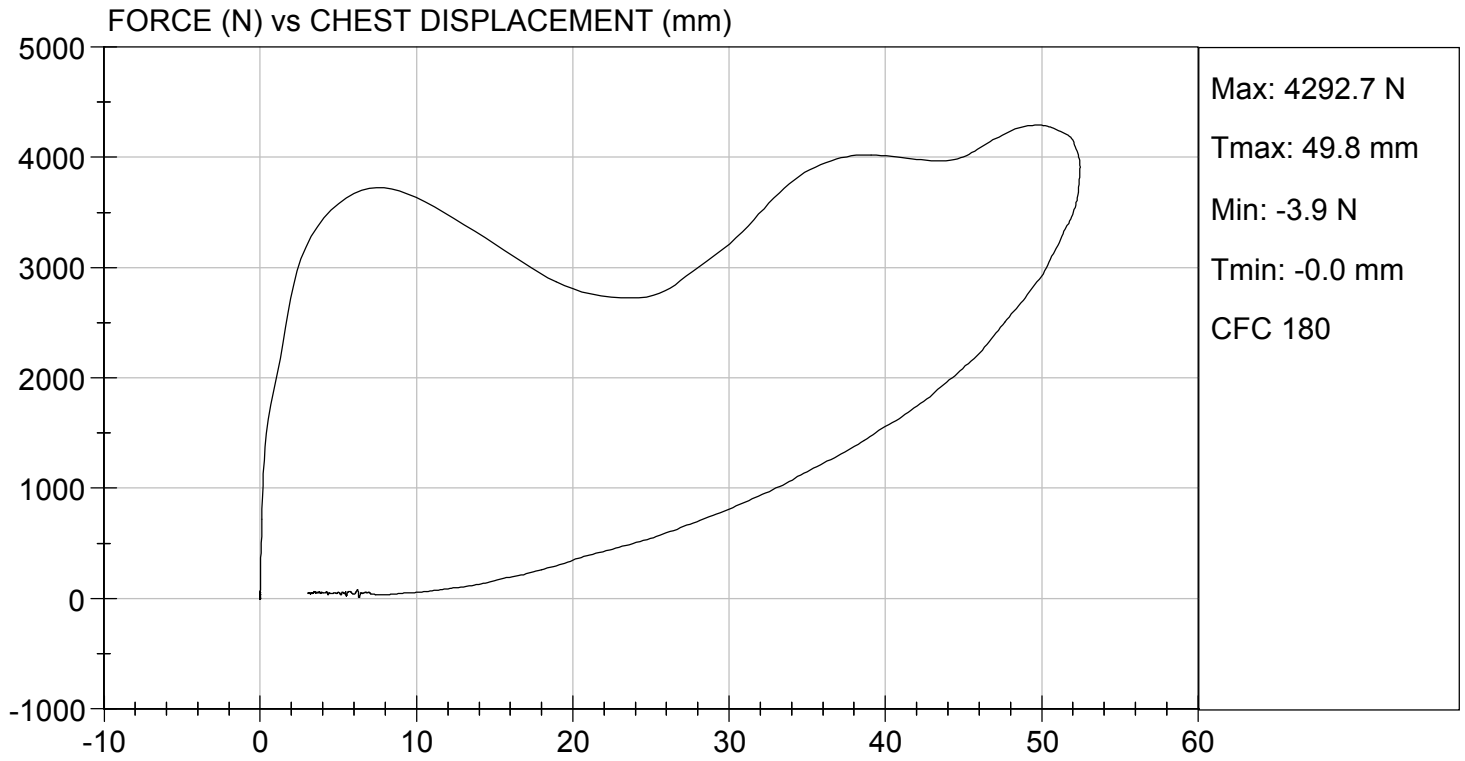

**MGA RESEARCH CORPORATION  
 RIGHT KNEE IMPACT TEST  
 HYBRID III 5TH PERCENTILE**

**ATD Serial No:**       DH1659      

**Test I.D:**       D202485      


Tested Parameter	Units	Specification	Result	Pass/Fail
Laboratory Temperature	deg C	18.9 to 25.6	21.2	Pass
Laboratory Relative Humidity	%	10 to 70	31	Pass
Probe Speed	m/s	2.07 to 2.13	2.12	Pass
Maximum Force	N	3450 to 4060	3774	Pass
<b>Overall Test Results</b>				<b>Pass</b>



\_\_\_\_\_  
 Laboratory Technician

10/06/2020

\_\_\_\_\_  
 Test Date




\_\_\_\_\_  
 Approved By



TEST DESC: RIGHT KNEE  
VELOCITY: 6.94 ft/s, 2.12 m/s

TEST DATE: 10/06/2020  
TEST #: D202485

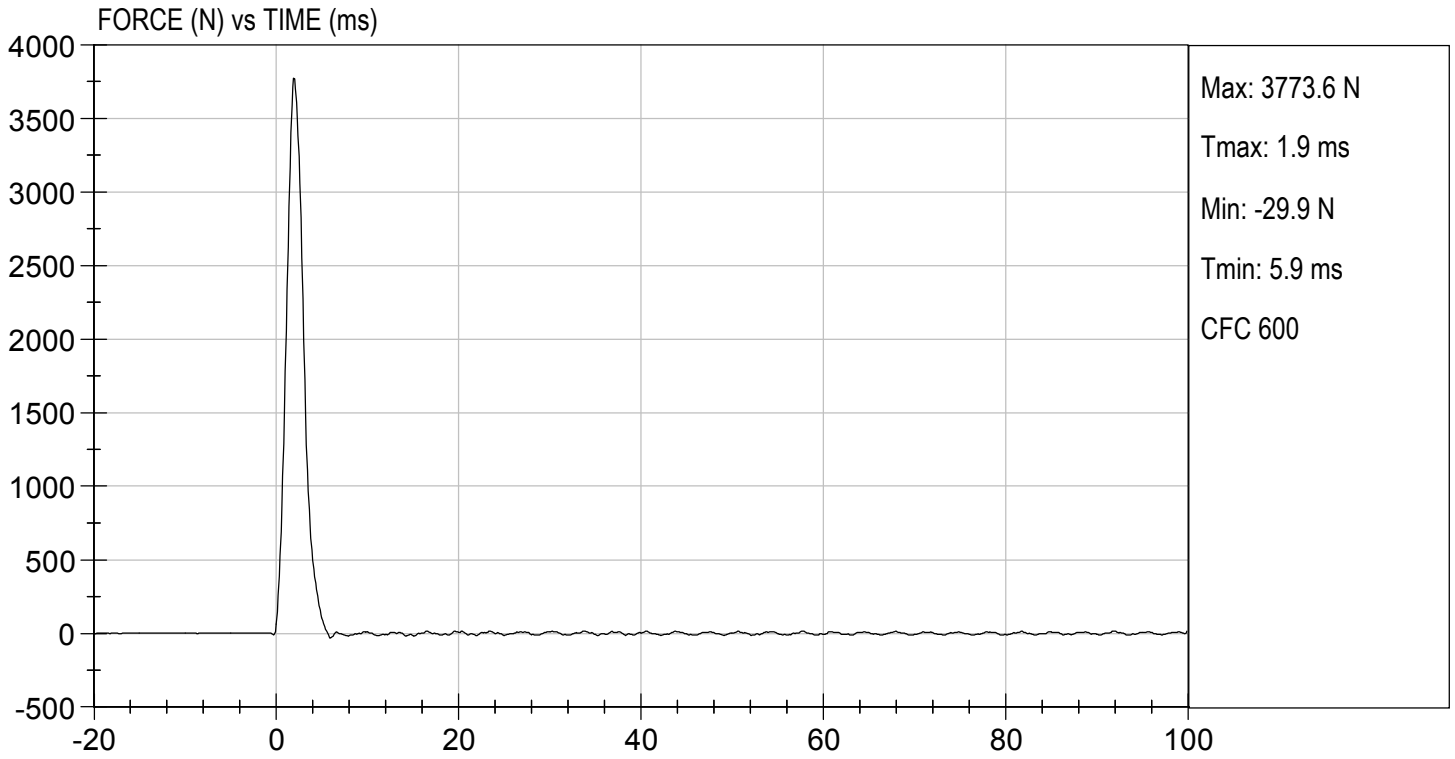



**MGA RESEARCH CORPORATION  
LEFT KNEE IMPACT TEST  
HYBRID III 5TH PERCENTILE**

**ATD Serial No:**       DH1659      

**Test I.D:**       D202486      


Tested Parameter	Units	Specification	Result	Pass/Fail
Laboratory Temperature	deg C	18.9 to 25.6	21.2	Pass
Laboratory Relative Humidity	%	10 to 70	31	Pass
Probe Speed	m/s	2.07 to 2.13	2.10	Pass
Maximum Force	N	3450 to 4060	3653	Pass
<b>Overall Test Results</b>				<b>Pass</b>



\_\_\_\_\_  
Laboratory Technician

10/06/2020

\_\_\_\_\_  
Test Date




\_\_\_\_\_  
Approved By



TEST DESC: LEFT KNEE  
VELOCITY: 6.89 ft/s, 2.10 m/s

TEST DATE: 10/06/2020  
TEST #: D202486

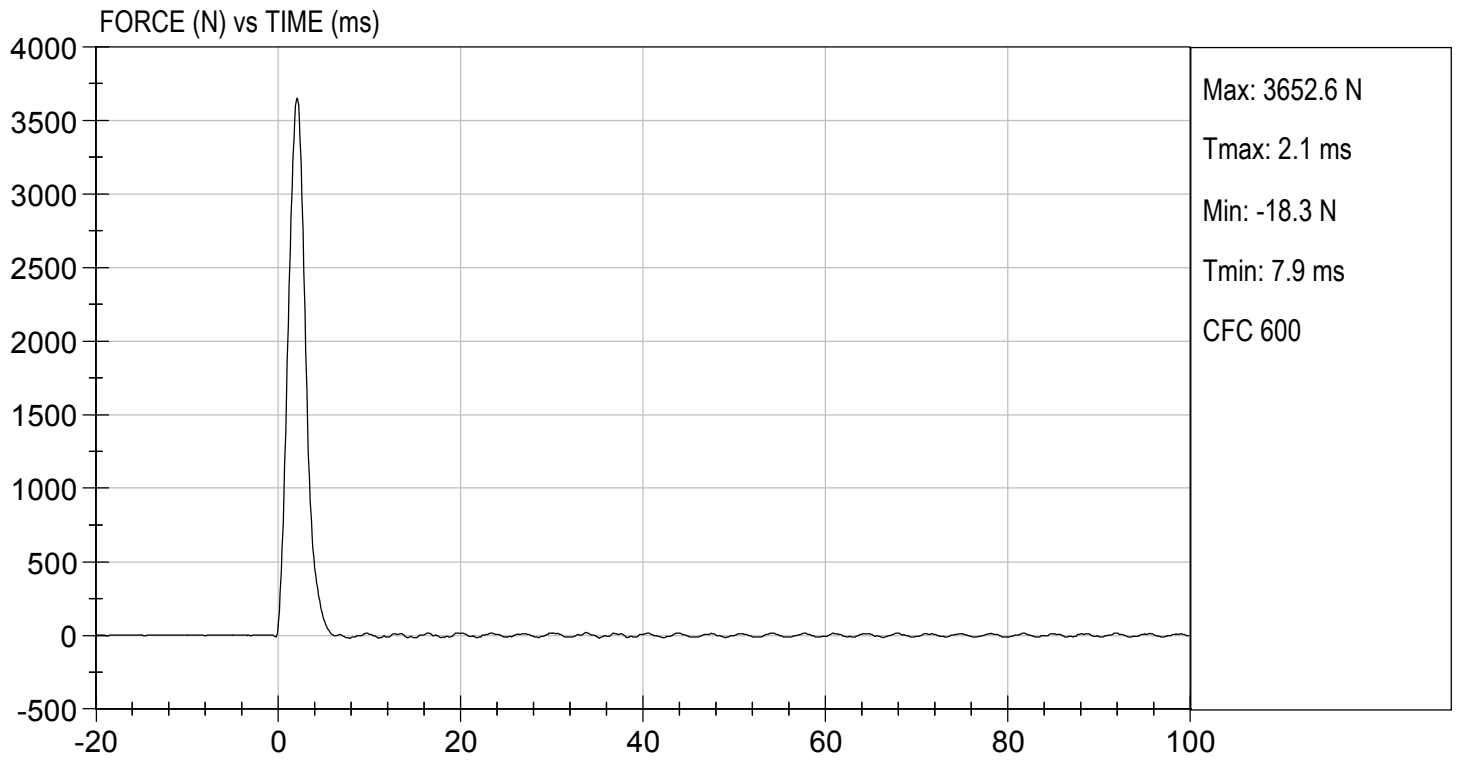

**MGA RESEARCH CORPORATION**  
**TORSO FLEXION TEST**  
**HYBRID III 5TH PERCENTILE**


**ATD Serial No:**       DH1659      



**Test I.D:**       D202487      

Tested Parameter	Units	Specification	Result	Pass/Fail
Laboratory Temperature	deg C	18.9 to 25.6	21.3	Pass
Laboratory Relative Humidity	%	10 to 70	30	Pass
Initial Angle	deg	0 to 20	18	Pass
Return Angle	deg	+/- 8	5	Pass
Force at 45 deg	N	320 to 390	321	Pass
Upper Torso Deflection Rate	deg/s	0.5 to 1.5	0.7	Pass
<b>Overall Result</b>				<b>Pass</b>

  
 \_\_\_\_\_  
 Laboratory Technician

10/06/2020  
 \_\_\_\_\_  
 Test Date

  
 \_\_\_\_\_  
 Approved By

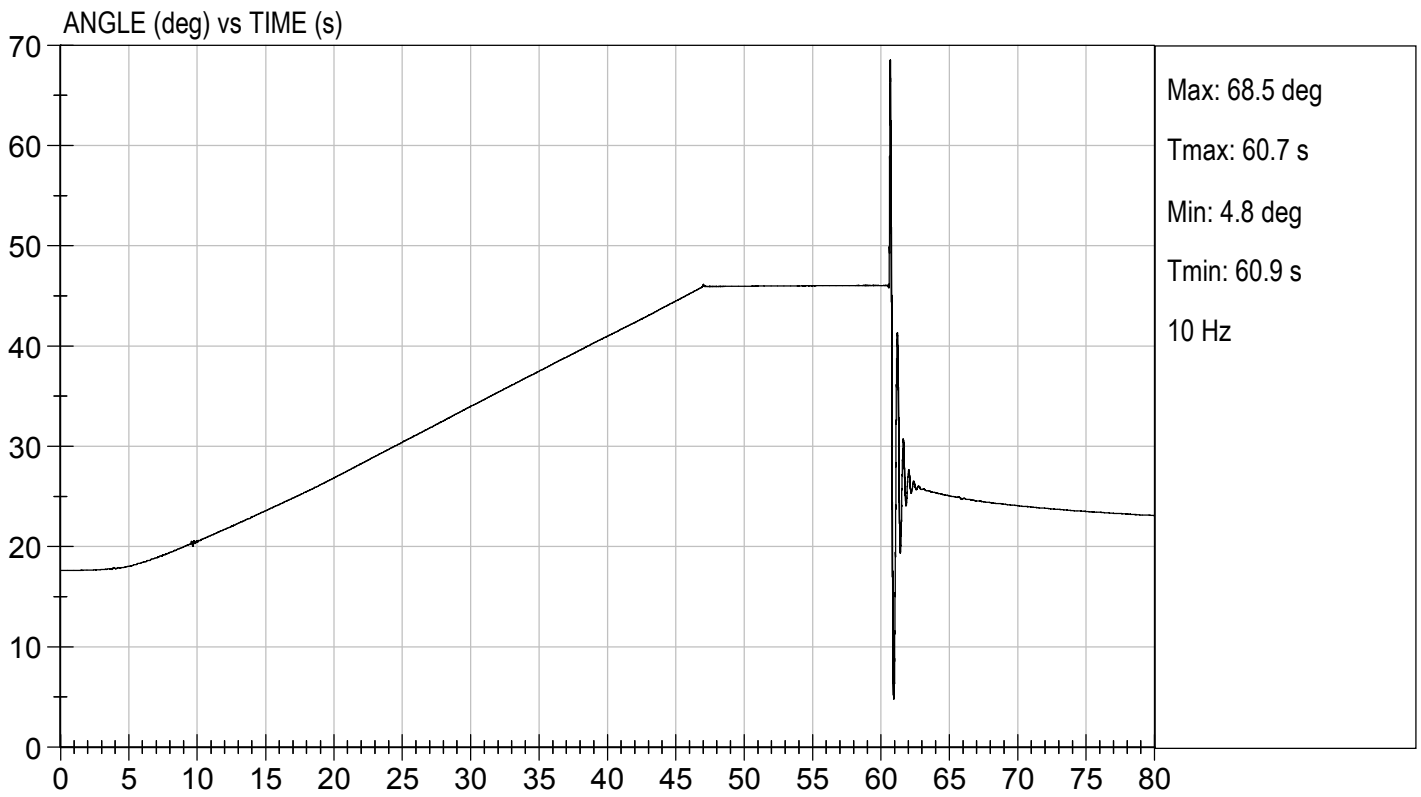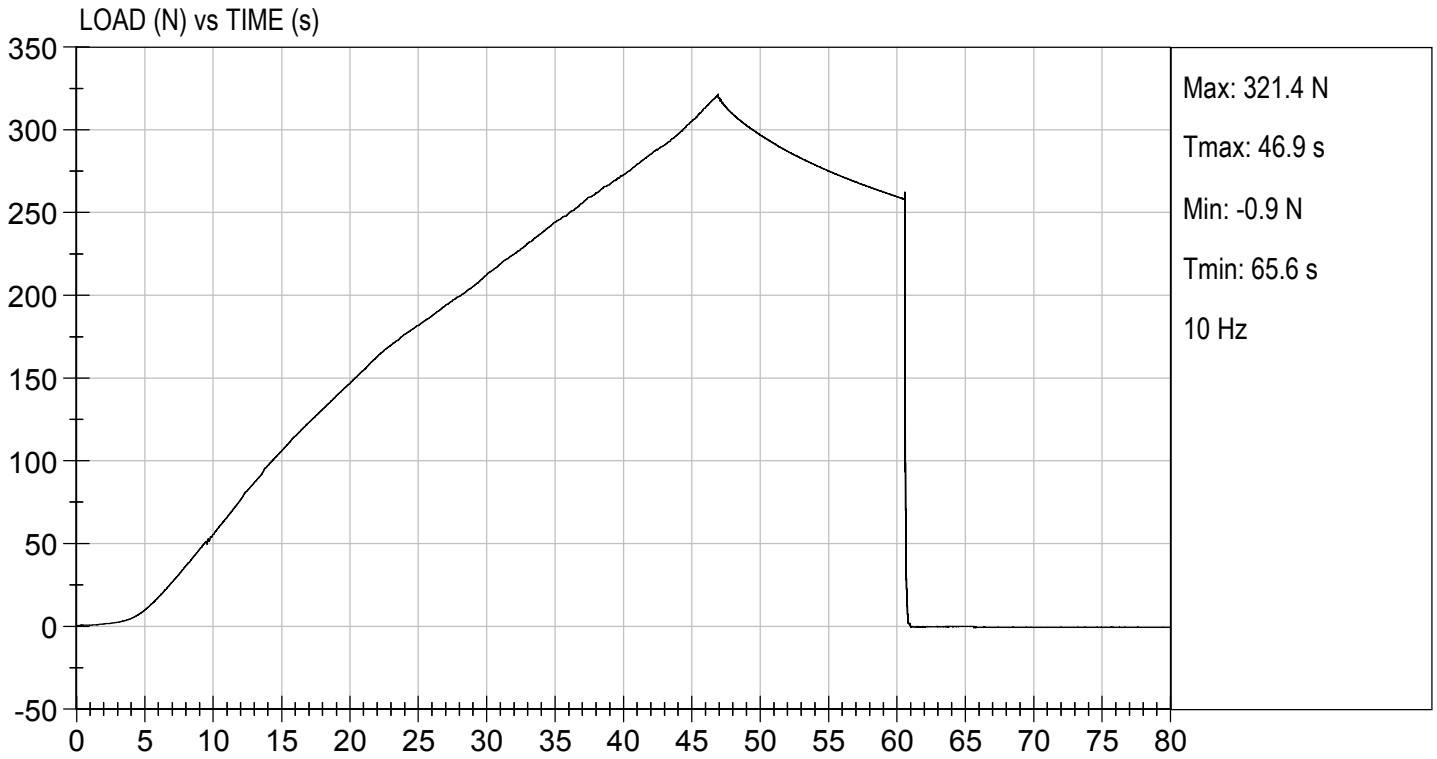

**CALIBRATION TEST RESULTS**

**POST-TEST**

**HYBRID III 5<sup>TH</sup> PERCENTILE FEMALE - PASSENGER ATD**

**MGA RESEARCH CORPORATION**  
**HEAD DROP TEST**  
**HYBRID III 5TH PERCENTILE**

ATD Serial No:       DH1659      

Test ID:       D202701      


Tested Parameter	Units	Specification	Result	Pass/Fail
Laboratory Temperature	deg C	18.9 to 25.6	21.2	Pass
Laboratory Relative Humidity	%	10 to 70	23	Pass
Peak Resultant Acceleration	G's	250 to 300	295	Pass
Peak Lateral Acceleration	G's	<= +/- 15.0	-3.0	Pass
Unimodal	N/A	Yes	Yes	Pass
Oscillations	N/A	within 10% of peak	Yes	Pass
Overall Test Results				Pass





\_\_\_\_\_  
Laboratory Technician



10/27/2020

\_\_\_\_\_  
Test Date



\_\_\_\_\_  
Approved By

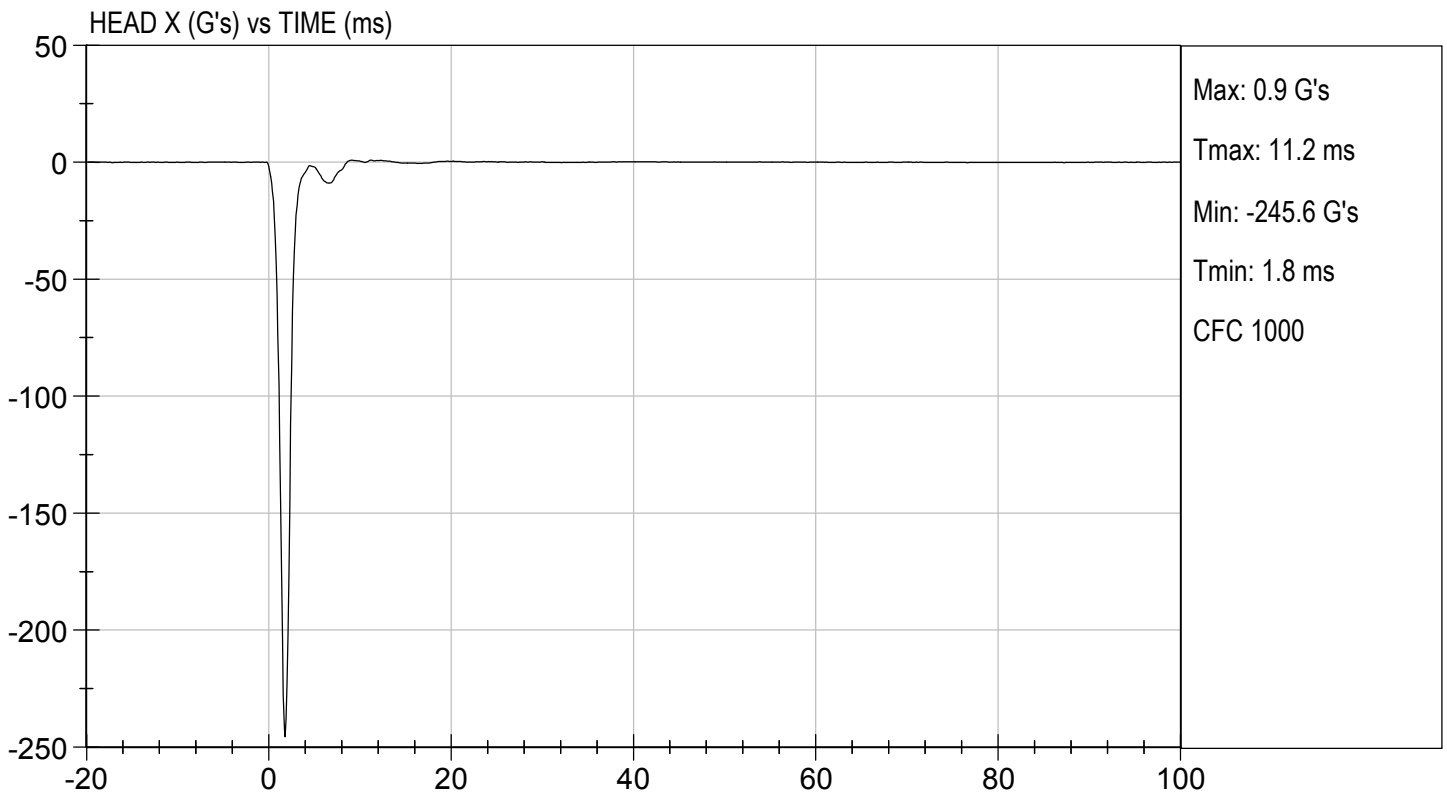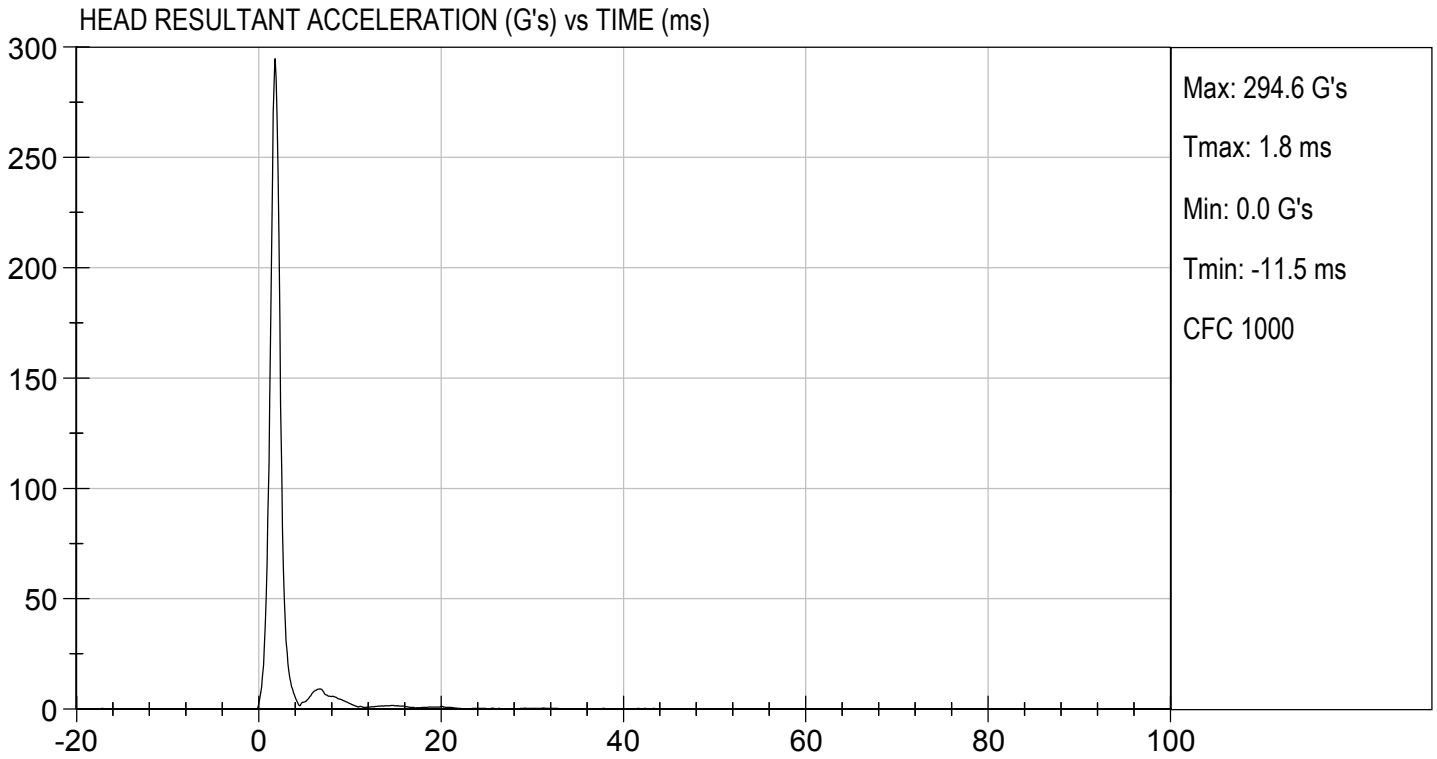

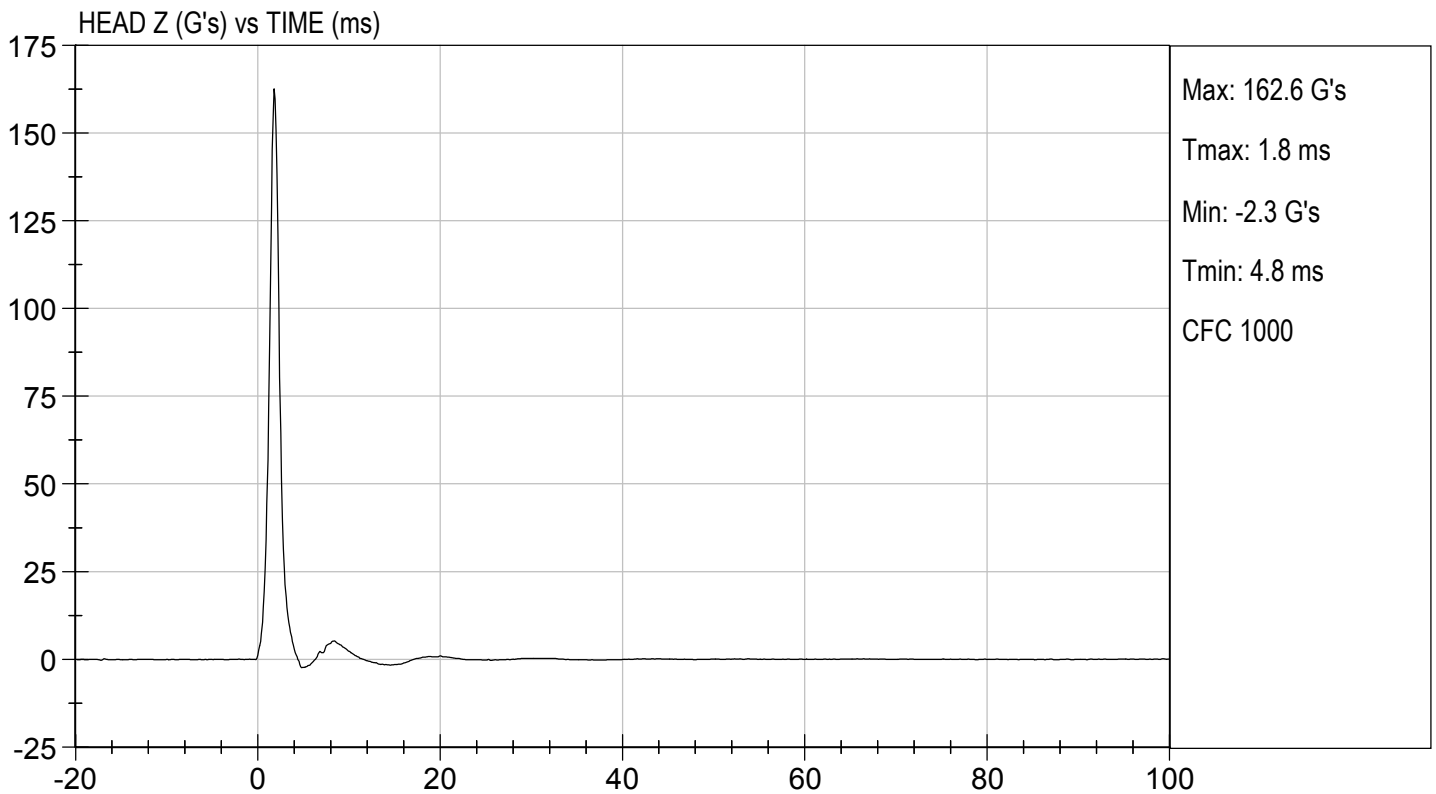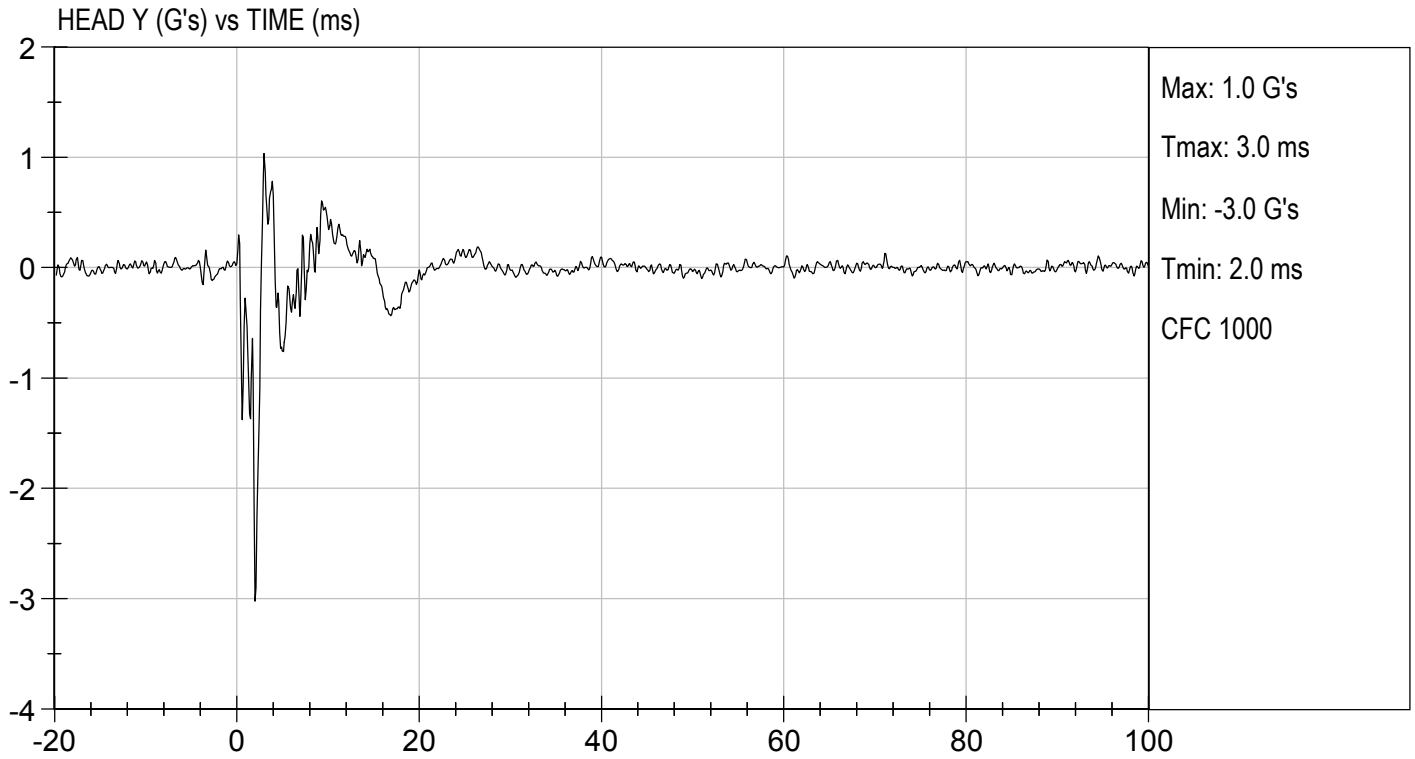



**MGA RESEARCH CORPORATION**

**NECK FLEXION TEST**

**HYBRID III 5TH PERCENTILE**

ATD Serial No:           DH1659          



Test I.D.:           D202702          


Tested Parameter		Units	Specification	Result	Pass/Fail
Laboratory Temperature		deg C	20.6 to 22.2	21.7	Pass
Laboratory Relative Humidity		%	10 to 70	24	Pass
Pendulum Speed		m/s	6.89 to 7.13	7.13	Pass
Pendulum Velocity	10 ms	m/s	2.1 to 2.5	2.2	Pass
	20 ms	m/s	4.0 to 5.0	4.5	Pass
	30 ms	m/s	5.8 to 7.0	6.3	Pass
D Plane Rotation	Max	deg	77 to 91	81	Pass
Occipital Condyle Moment within Rotation Corridor		Nm	69 to 83	74	Pass
Positive Moment Time Curve Decay to 10 Nm		ms	80 to 100	83	Pass
Overall Results					Pass

*Gerald Cervero*  
Laboratory Technician

          10/27/2020            
Test Date

*B. F. L.*  
Approved By

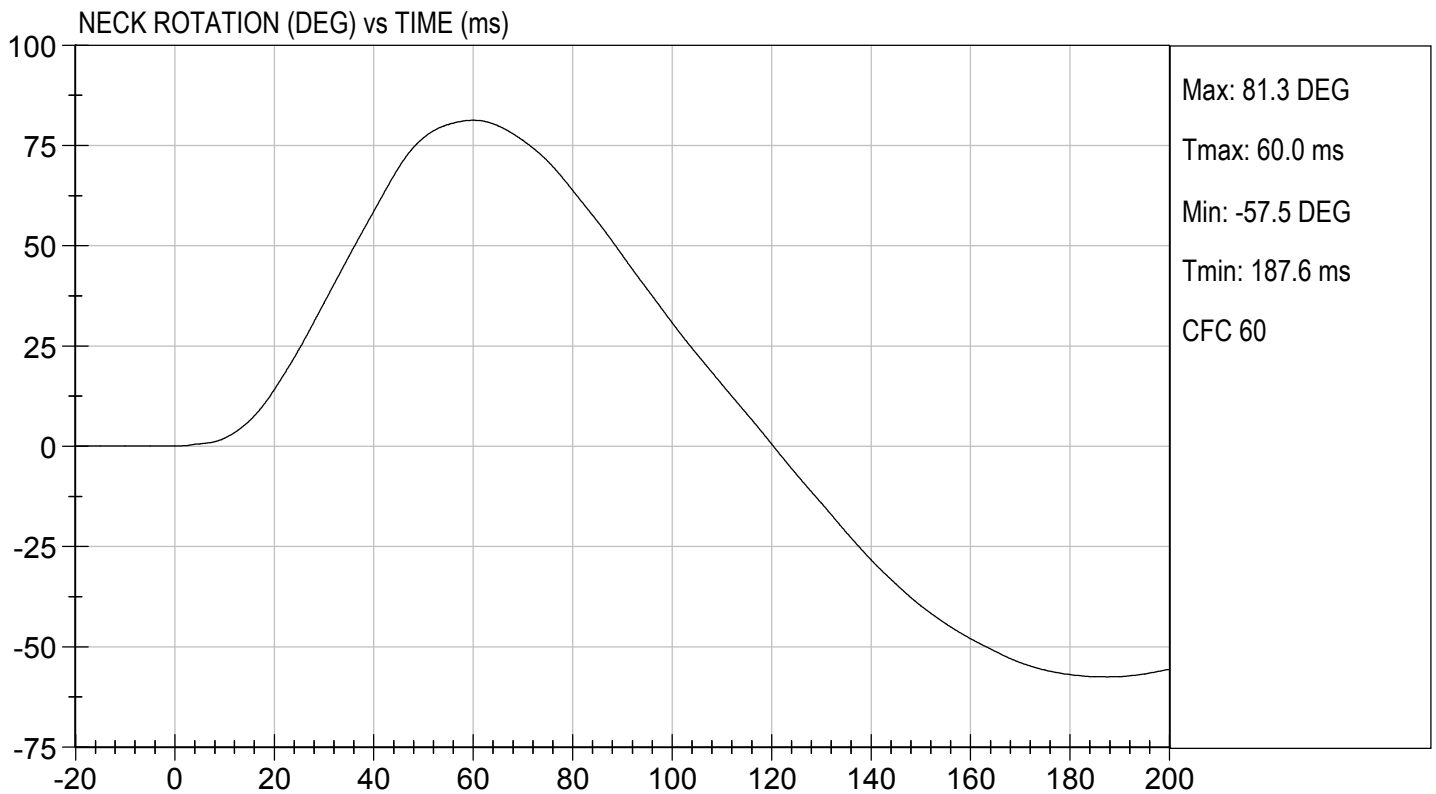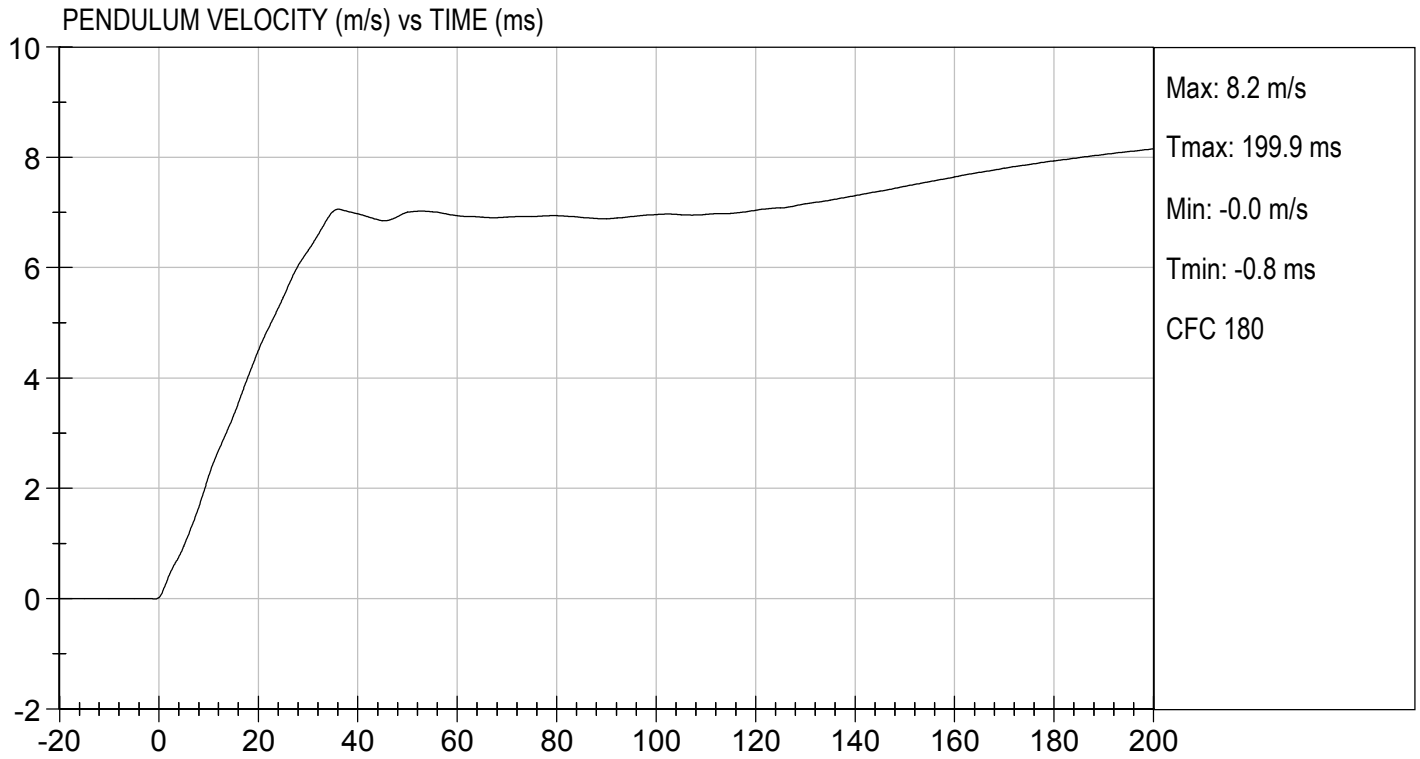

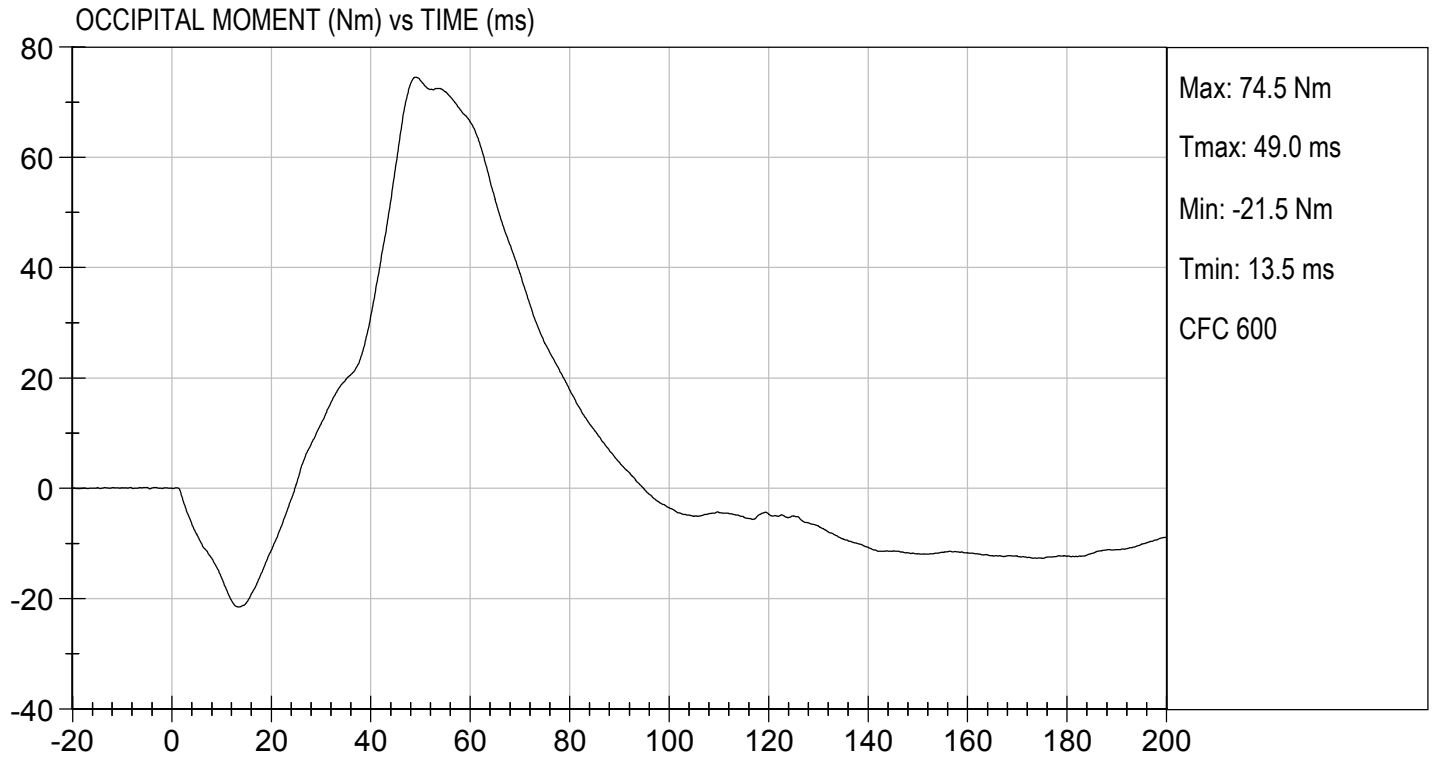

**MGA RESEARCH CORPORATION**  
**NECK EXTENSION TEST**  
**HYBRID III 5TH PERCENTILE**


ATD Serial No:           DH1659          



Test I.D:           D202703          


Tested Parameter		Units	Specification	Result	Pass/Fail
Laboratory Temperature		deg C	20.6 to 22.2	21.2	Pass
Laboratory Relative Humidity		%	10 to 70	22	Pass
Pendulum Speed		m/s	5.95 to 6.19	6.12	Pass
Pendulum Velocity	10 ms	m/s	1.5 to 1.9	1.7	Pass
	20 ms	m/s	3.1 to 3.9	3.5	Pass
	30 ms	m/s	4.6 to 5.6	5.2	Pass
D Plane Rotation	Max	deg	99 to 114	104	Pass
Occipital Condyle Moment within Rotation Corridor		Nm	-65 to -53	-54	Pass
Negative Moment Time Curve Decay to -10 Nm		ms	94 to 114	105	Pass
Overall Results					Pass

  
 \_\_\_\_\_  
 Laboratory Technician

10/28/2020  
 \_\_\_\_\_  
 Test Date

  
 \_\_\_\_\_  
 Approved By

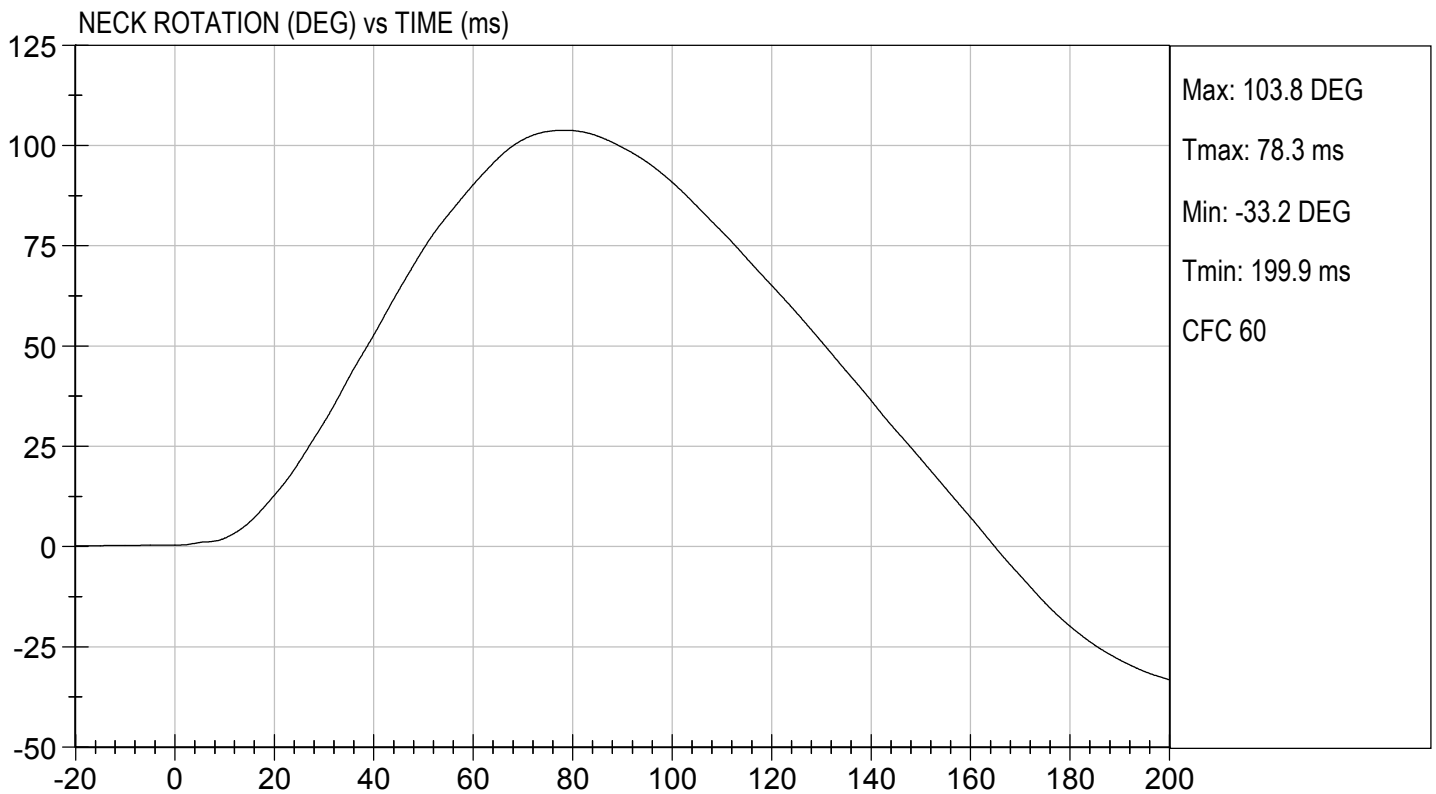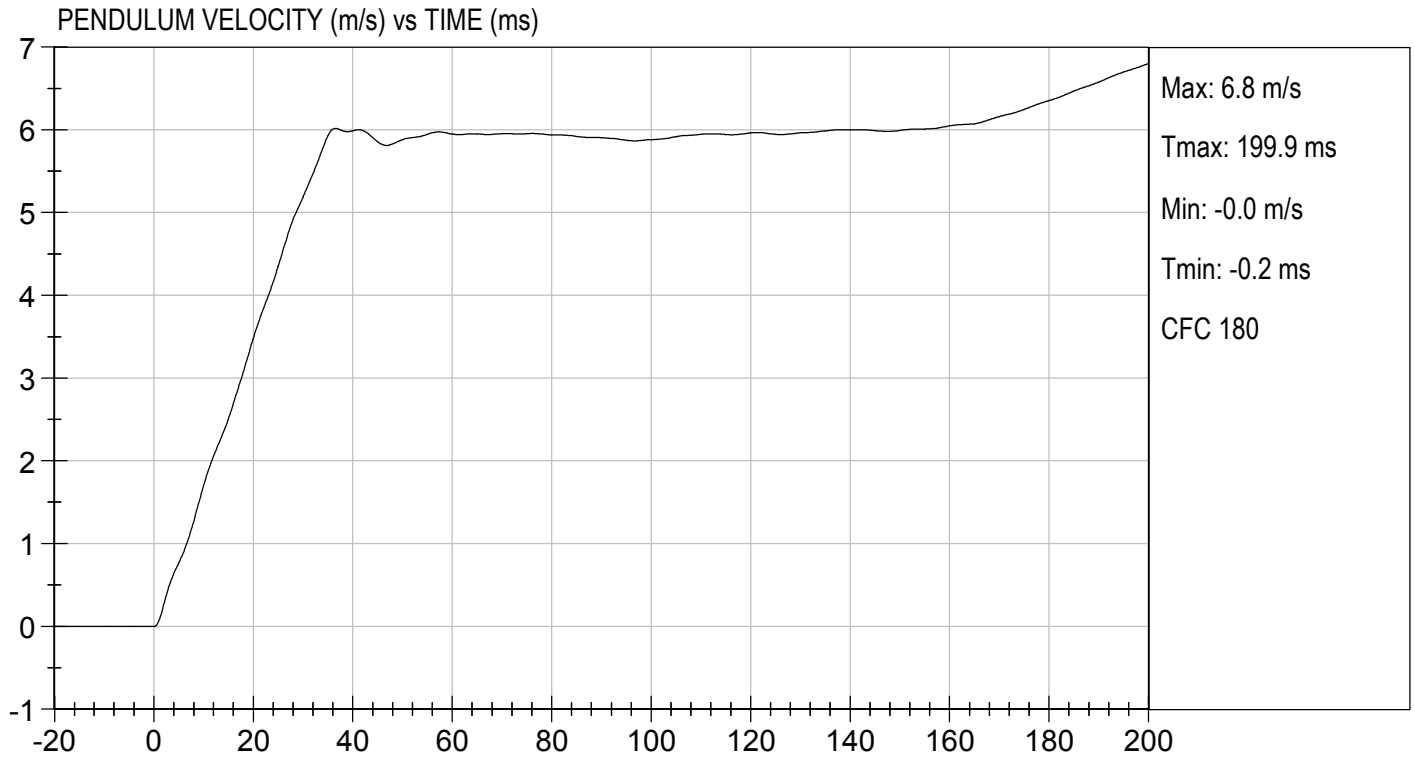

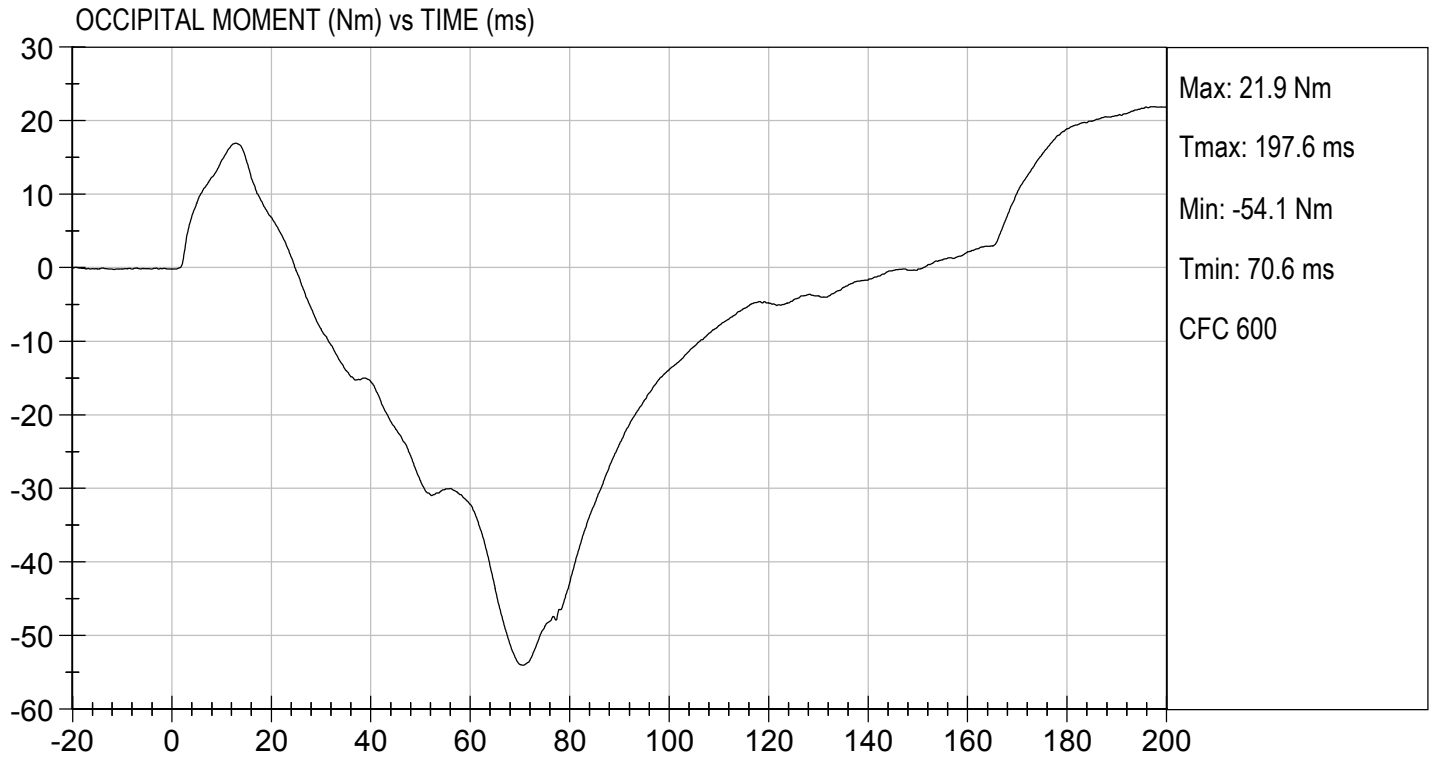

**MGA RESEARCH CORPORATION**  
**THORAX IMPACT**  
**HYBRID III 5TH PERCENTILE**

**ATD Serial No:**       DH1659      

**Test I.D:**       D202704      

Tested Parameter	Units	Specification	Result	Pass/Fail
Temperature	deg C	20.6 to 22.2	21.7	Pass
Relative Humidity	%	10 to 70	23	Pass
Probe Speed	m/s	6.59 to 6.83	6.77	Pass
Peak Deflection	mm	50 to 58	50	Pass
Peak Resistive Force w/in Deflection Corridor	N	3900 to 4400	4092	Pass
Internal Hysteresis	%	69 to 85	75	Pass
Peak Force 18 mm - 50 mm	N	<= 4600	4391	Pass
<b>Overall Test Results</b>				<b>Pass</b>

*Gerald Guerrero*


\_\_\_\_\_  
 Laboratory Technician

10/27/2020

\_\_\_\_\_  
 Test Date

*B. F. K.*

\_\_\_\_\_  
 Approved By

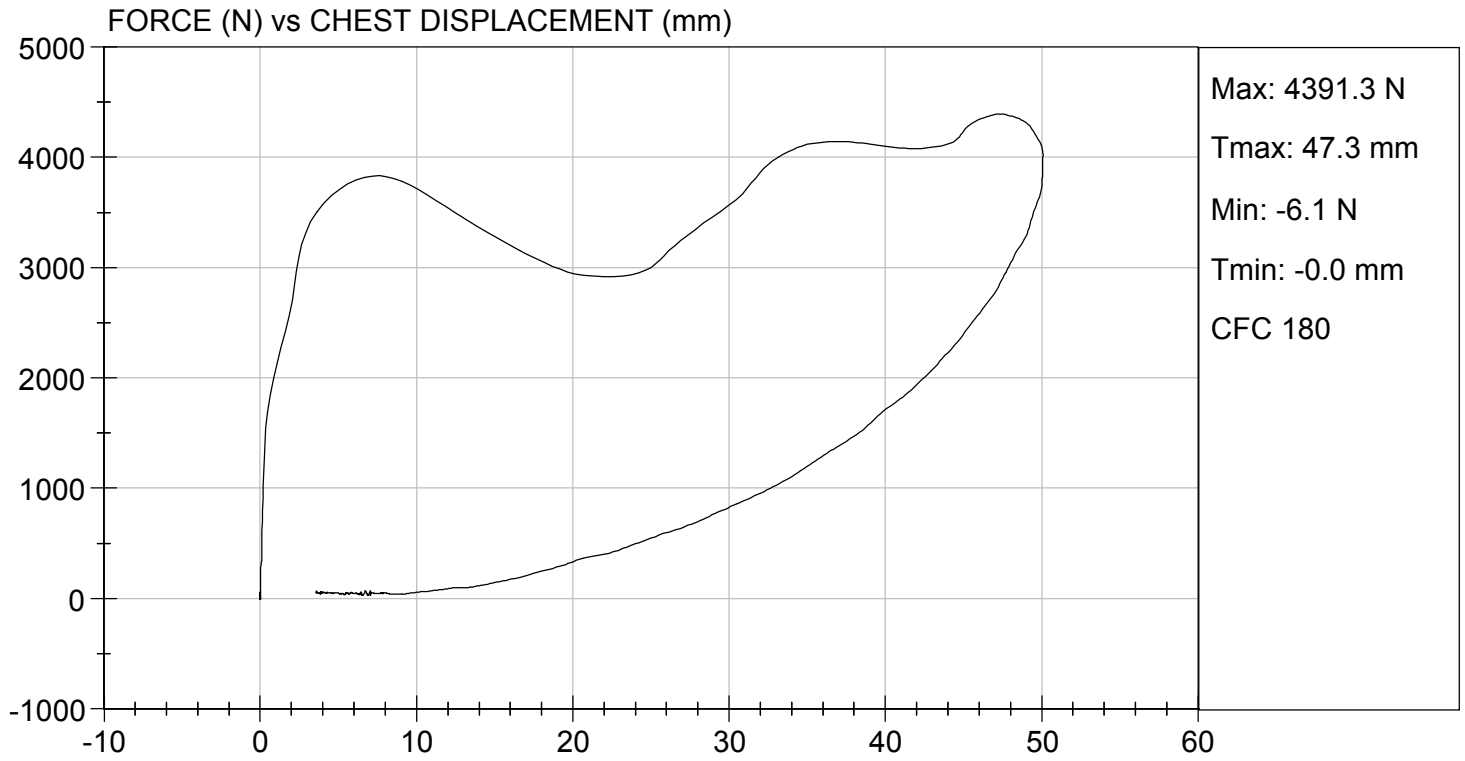



**MGA RESEARCH CORPORATION**  
**RIGHT KNEE IMPACT TEST**  
**HYBRID III 5TH PERCENTILE**


**ATD Serial No:**       DH1659      

**Test I.D:**       D202705      

Tested Parameter	Units	Specification	Result	Pass/Fail
Laboratory Temperature	deg C	18.9 to 25.6	21.2	Pass
Laboratory Relative Humidity	%	10 to 70	23	Pass
Probe Speed	m/s	2.07 to 2.13	2.10	Pass
Maximum Force	N	3450 to 4060	3819	Pass
<b>Overall Test Results</b>				<b>Pass</b>

  
 \_\_\_\_\_  
 Laboratory Technician


10/27/2020  
 Test Date

  
 \_\_\_\_\_  
 Approved By



TEST DESC: RIGHT KNEE  
VELOCITY: 6.89 ft/s, 2.10 m/s

TEST DATE: 10/27/2020  
TEST #: D202705

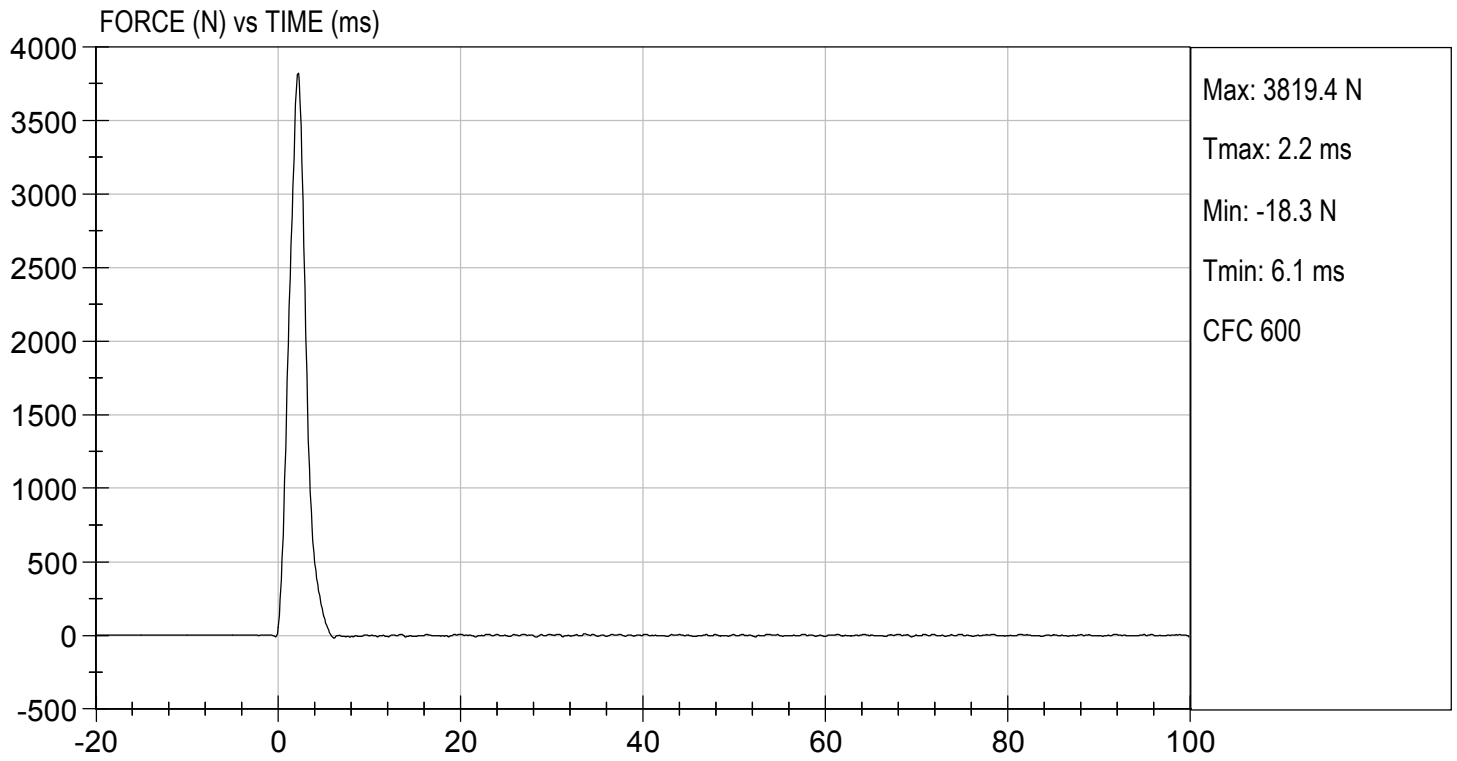

**MGA RESEARCH CORPORATION**  
**LEFT KNEE IMPACT TEST**  
**HYBRID III 5TH PERCENTILE**


**ATD Serial No:**       DH1659      

**Test I.D:**       D202706      

Tested Parameter	Units	Specification	Result	Pass/Fail
Laboratory Temperature	deg C	18.9 to 25.6	21.2	Pass
Laboratory Relative Humidity	%	10 to 70	23	Pass
Probe Speed	m/s	2.07 to 2.13	2.11	Pass
Maximum Force	N	3450 to 4060	3456	Pass
<b>Overall Test Results</b>				<b>Pass</b>

  
 \_\_\_\_\_  
 Laboratory Technician


10/27/2020  
 \_\_\_\_\_  
 Test Date

  
 \_\_\_\_\_  
 Approved By



TEST DESC: LEFT KNEE  
VELOCITY: 6.92 ft/s, 2.11 m/s

TEST DATE: 10/27/2020  
TEST #: D202706

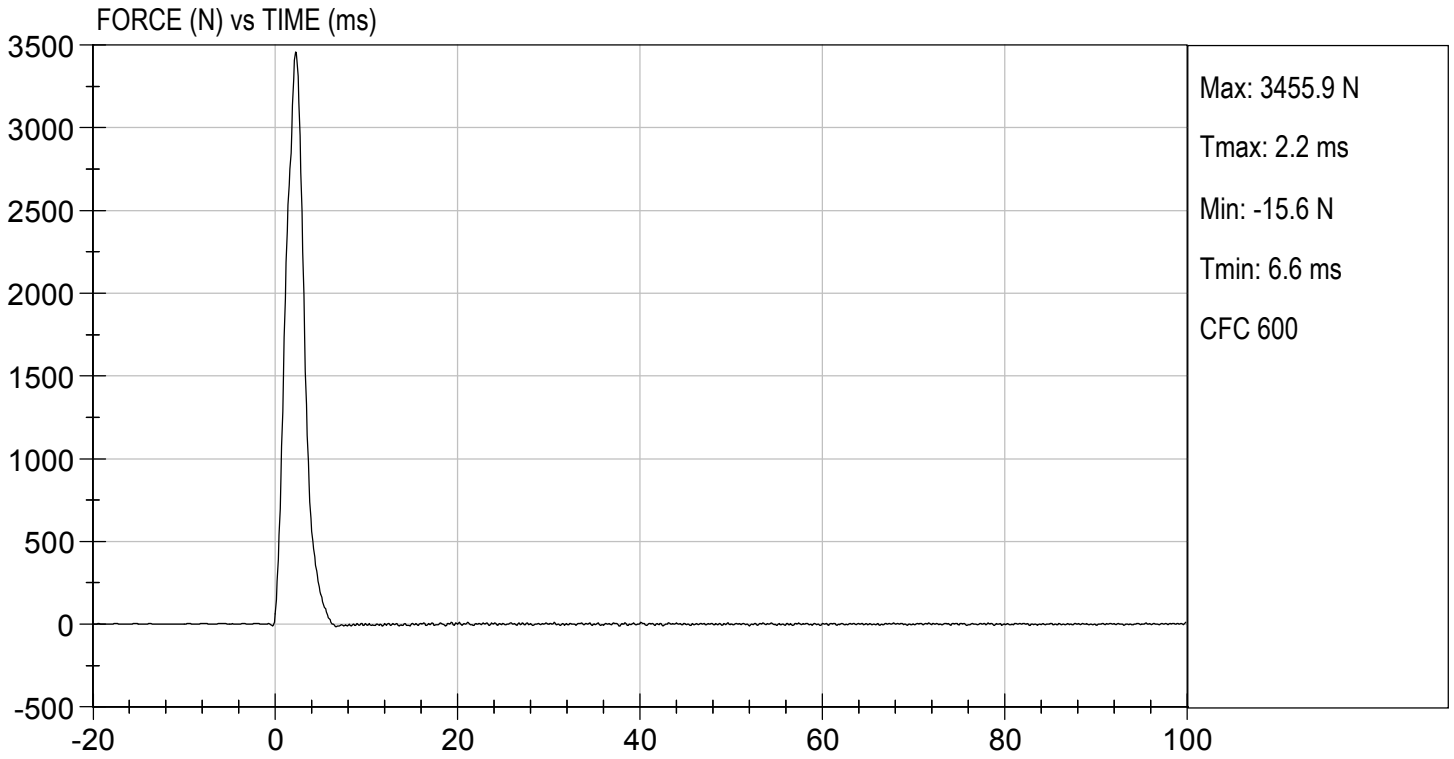

**MGA RESEARCH CORPORATION**  
**TORSO FLEXION TEST**  
**HYBRID III 5TH PERCENTILE**

**ATD Serial No:**       DH1659      

**Test I.D:**       D202707      

Tested Parameter	Units	Specification	Result	Pass/Fail
Laboratory Temperature	deg C	18.9 to 25.6	21.2	Pass
Laboratory Relative Humidity	%	10 to 70	23	Pass
Initial Angle	deg	0 to 20	20	Pass
Return Angle	deg	+/- 8	3	Pass
Force at 45 deg	N	320 to 390	349	Pass
Upper Torso Deflection Rate	deg/s	0.5 to 1.5	1.4	Pass
<b>Overall Result</b>				<b>Pass</b>

*Gerald Cherrero*



\_\_\_\_\_  
 Laboratory Technician

10/27/2020

\_\_\_\_\_  
 Test Date

*B. F. L.*

\_\_\_\_\_  
 Approved By

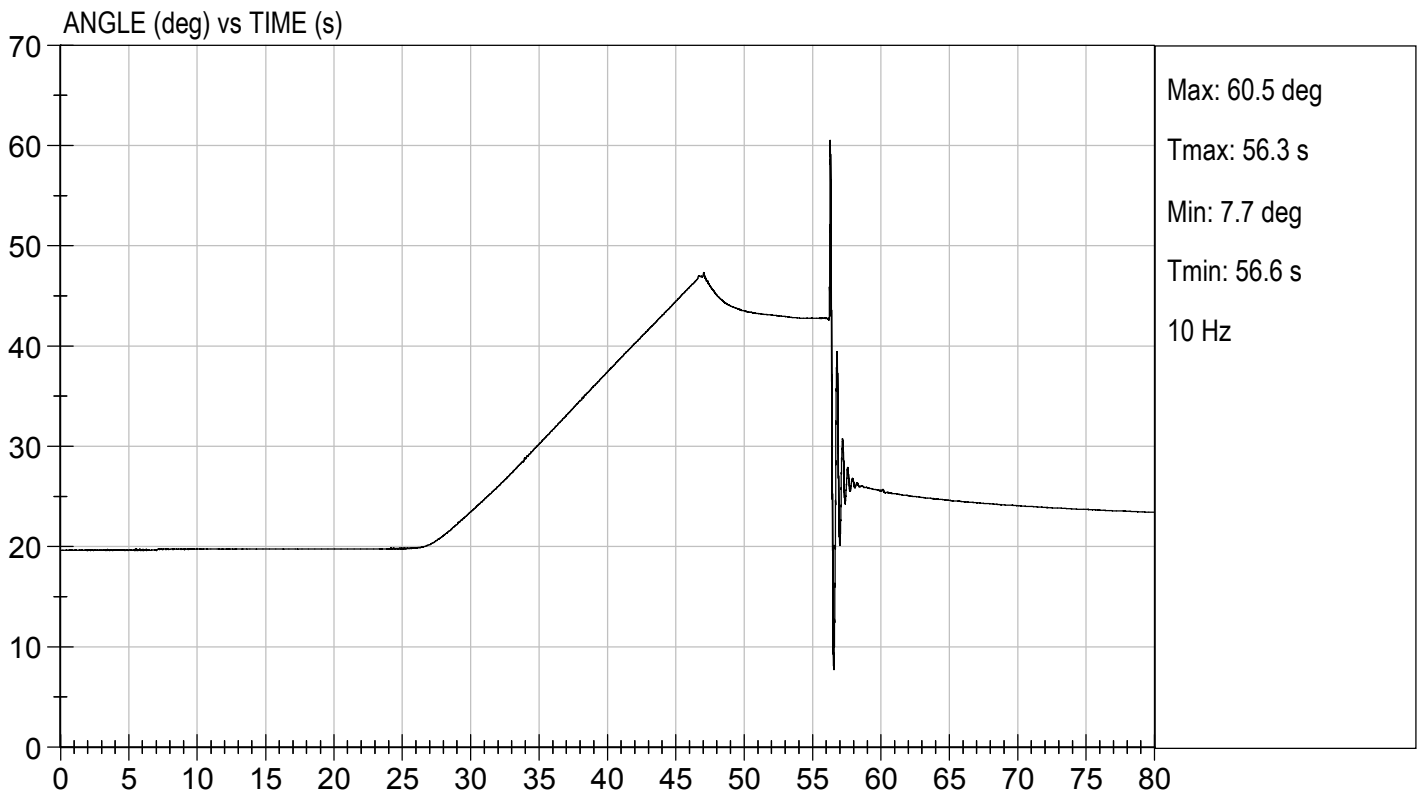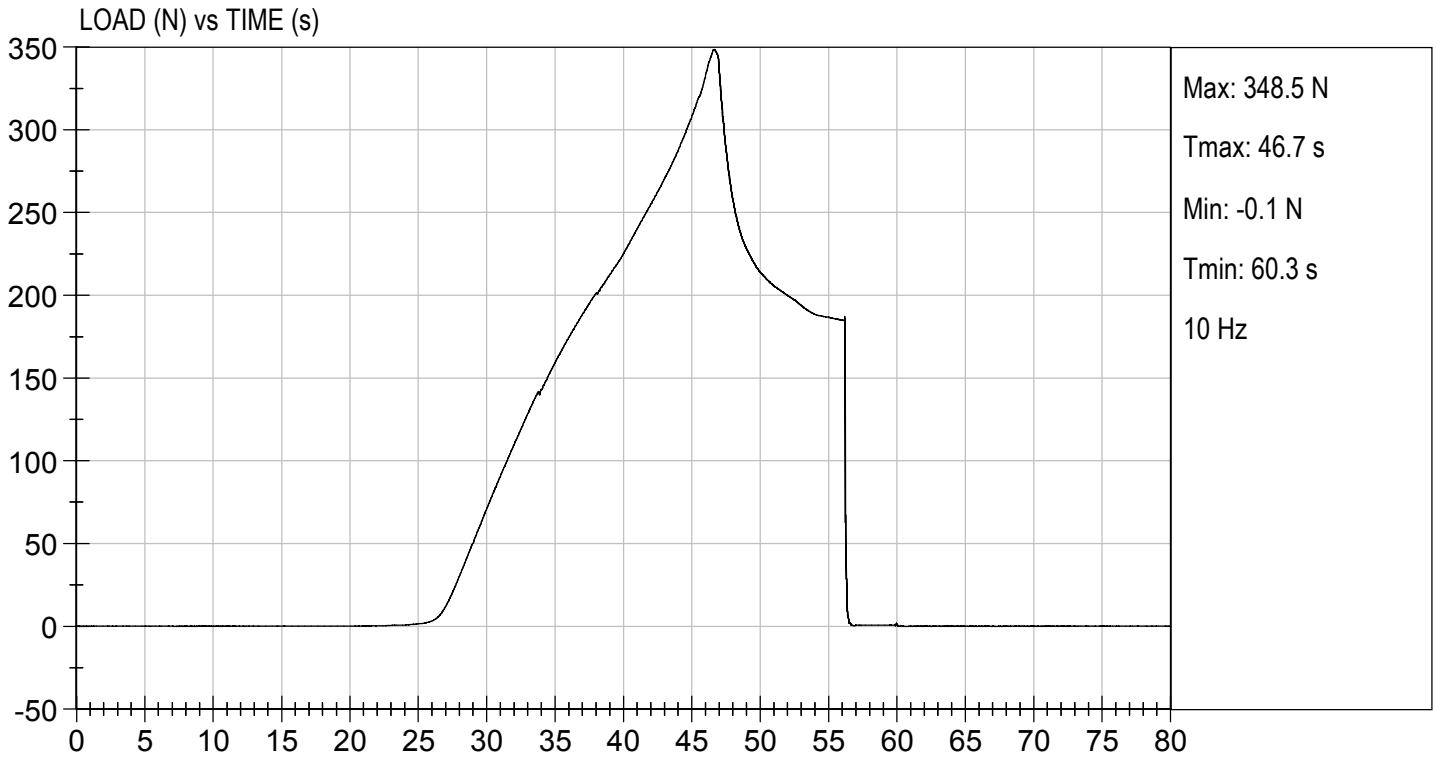

**APPENDIX D**  
**TEST EQUIPMENT AND INSTRUMENTATION CALIBRATION DATA**

**TABLE 1 – DRIVER DUMMY INSTRUMENTATION**

Instrument Location			Axis	Hybrid III 50 <sup>th</sup> S/N 351		
				Serial Number	Manufacturer	Calibration Date
Head Accelerometers	Primary	X		P79741	Endevco	09/02/2020
		Y		P79743	Endevco	09/02/2020
		Z		P79744	Endevco	09/02/2020
	Redundant	X		P94834	Endevco	09/02/2020
		Y		P94856	Endevco	09/02/2020
		Z		P97412	Endevco	09/02/2020
Head Angular Rate Sensors			X	ARS7402	DTS	08/04/2020
			Y	ARS7416	DTS	08/04/2020
			Z	ARS7366	DTS	08/04/2020
Upper Neck Load Cell			Fx, Fy, Fz Mx, My, Mz	NG1915	Denton	03/05/2020
Chest Accelerometers	Primary	X		P86792	Endevco	09/02/2020
		Y		P86793	Endevco	09/02/2020
		Z		P88348	Endevco	09/02/2020
	Redundant	X		P88666	Endevco	09/02/2020
		Y		P88667	Endevco	09/02/2020
		Z		P94109	Endevco	09/02/2020
Chest Potentiometer			X	351	Servo	09/02/2020
Pelvis Accelerometers			X	P95526	Endevco	09/01/2020
			Y	P96038	Endevco	09/01/2020
			Z	P97742	Endevco	09/01/2020
Femur Load Cells	Right	Primary	Z	FG121	Denton	09/02/2020
		Redundant	Z	FG121	Denton	09/02/2020
	Left	Primary	Z	FG122	Denton	09/02/2020
		Redundant	Z	FG122	Denton	09/02/2020
Tibia Load Cells	Right	Upper	Mx, My, Fz	TGDH3308	FTSS	03/05/2020
		Lower	Mx, My, Fz	AGDI4208	FTSS	03/05/2020
	Left	Upper	Mx, My, Fz	TGDG6744	FTSS	03/05/2020
		Lower	Mx, My, Fz	AGDI4273	FTSS	03/05/2020
Foot Accelerometers	Right	Rear	X	t22486	Endevco	10/06/2020
			Z	P97382	Endevco	10/01/2020
		Front	Z	P82120	Endevco	09/02/2020
	Left	Rear	X	T16468	Endevco	09/01/2020
			Z	T16496	Endevco	09/01/2020
		Front	Z	T16501	Endevco	09/01/2020
Seat Belt Load Cells			Lap	SBG161	FTSS	11/13/2019
			Shoulder	SBG157	FTSS	11/13/2019



**TABLE 2 – FRONT PASSENGER DUMMY INSTRUMENTATION**

Instrument Location			Axis	Hybrid III 5 <sup>th</sup> S/N DH1659		
				Serial Number	Manufacturer	Calibration Date
Head Accelerometers	Primary		X	P82304	Endevco	08/11/2020
			Y	P88172	Endevco	08/11/2020
			Z	T16400	Endevco	08/12/2020
	Redundant		X	T16403	Endevco	08/11/2020
			Y	T16406	Endevco	08/11/2020
			Z	T16413	Endevco	08/12/2020
Head Angular Rate Sensors			X	ARS7340	DTS	08/04/2020
			Y	ARS7357	DTS	08/04/2020
			Z	ARS7442	DTS	08/04/2020
Upper Neck Load Cell			Fx, Fy, Fz Mx, My, Mz	NG2256	Denton	05/04/2020
Chest Accelerometers	Primary		X	T24796	Endevco	08/12/2020
			Y	T16416	Endevco	08/12/2020
			Z	T16420	Endevco	08/12/2020
	Redundant		X	T16423	Endevco	08/12/2020
			Y	T24766	Endevco	08/12/2020
			Z	T22499	Endevco	08/12/2020
Chest Potentiometer			X	DH1659	Servo	08/12/2020
Pelvis Accelerometers			X	T16434	Endevco	08/11/2020
			Y	T16435	Endevco	08/11/2020
			Z	T16436	Endevco	08/11/2020
Femur Load Cells	Right	Primary	Z	FG126	Denton	08/13/2020
		Redundant	Z	FG126	Denton	08/13/2020
	Left	Primary	Z	FG127	Denton	08/13/2020
		Redundant	Z	FG127	Denton	08/13/2020
Tibia Load Cells	Right	Upper	Mx, My, Fz	TG467	Denton	05/04/2020
		Lower	Mx, My, Fz	AG491	Denton	05/04/2020
	Left	Upper	Mx, My, Fz	TG478	Denton	05/04/2020
		Lower	Mx, My, Fz	AG500	Denton	05/04/2020
Foot Accelerometers	Right	Rear	X	T16437	Endevco	08/11/2020
			Z	T16438	Endevco	08/11/2020
		Front	Z	T22258	Endevco	08/11/2020
	Left	Rear	X	T16441	Endevco	08/11/2020
			Z	T16444	Endevco	08/11/2020
		Front	Z	T16445	Endevco	08/11/2020
Seat Belt Load Cells		Lap		SBG273	FTSS	11/13/2019
		Shoulder		SBG272	FTSS	11/13/2019

**TABLE 3 – VEHICLE INSTRUMENTATION**

Instrument Location			Axis	Serial Number	Manufacturer	Calibration Date
Crossmember / Rear Seat Accelerometers	Left	Primary	X	PCB1380	PCB	07/21/2020
			Z	PCB1464	PCB	07/22/2020
		Redundant	X	T19383	Endevco	08/14/2020
	Right	Primary	X	A340719	MSI	10/11/2020
			Z	A340792	MSI	10/11/2020
		Redundant	X	A340802	MSI	10/11/2020
Engine Accelerometers		Top	X	P82614	Endevco	06/01/2020
		Bottom	X	PCB1279	PCB	08/17/2020