

**REPORT NUMBER: SINCAP-CAL-21-001**

**NEW CAR ASSESSMENT PROGRAM (NCAP)  
MOVING DEFORMABLE BARRIER SIDE IMPACT TEST**

**Nissan Motor Co. LTD.  
2021 Nissan Rogue  
SUV**

**NHTSA No: M20215204**

**PREPARED BY:  
CALSPAN CORPORATION  
P.O. BOX 400  
BUFFALO, NEW YORK 14225**



**March 5, 2021**

**FINAL REPORT**

**PREPARED FOR:  
U.S. DEPARTMENT OF TRANSPORTATION  
NATIONAL HIGHWAY TRAFFIC SAFETY ADMINISTRATION  
OFFICE OF CRASHWORTHINESS STANDARDS  
MAIL CODE: NRM-100  
1200 NEW JERSEY AVE SE, ROOM W43-410  
WASHINGTON, D.C. 20590**

This final test report was prepared for the U.S. Department of Transportation, National Highway Traffic Administration, in response to Contract Number DTNH22-14-D-00352L.

This publication is distributed by the U.S. Department of Transportation, National Highway Traffic Safety Administration, in the interest of information exchange. The opinions, findings and conclusions expressed in this publication are those of the author(s) and not necessarily those of the Department of Transportation or the National Highway Traffic Safety Administration. The United States Government assumes no liability for its contents or use thereof.

If trade or manufacturers' names or products are mentioned it is only because they are considered essential to the object of the publication and should not be construed as an endorsement. The United States Government does not endorse products or manufacturers.

Prepared by: Matthew Pronko  
Matthew Pronko, Test Engineer

Date: March 5, 2021

Approved by: Vanessa Hansen  
Vanessa Hansen, Operations Manager

Date: March 5, 2021

**FINAL REPORT ACCEPTANCE BY OCWS:**

\_\_\_\_\_  
Division Chief, New Car Assessment Program  
NHTSA, Office of Crashworthiness Standards

Date: \_\_\_\_\_

\_\_\_\_\_  
COTR, New Car Assessment Program  
NHTSA, Office of Crashworthiness Standards

Date: \_\_\_\_\_

## TECHNICAL REPORT DOCUMENTATION PAGE

<b>1. Report No.</b> SINCAP-CAL-21-001	<b>2. Government Accession No.</b>	<b>3. Recipient's Catalog No.</b>																												
<b>4. Title and Subtitle</b> Final Report of New Car Assessment Program Side Impact MDB Testing of a 2021 Nissan Rogue SUV NHTSA No.: M20215204		<b>5. Report Date</b> March 5, 2021																												
		<b>6. Performing Organization Code</b> CAL																												
Matthew Pronko, Test Engineer Vanessa Hansen, Operations Program Manager		<b>8. Performing Organization Report No.</b> CAL-DOT-2021-001																												
<b>9. Performing Organization Name and Address</b> Calspan Corporation Transportation Test Operations P.O. Box 400 Buffalo, New York 14225		<b>10. Work Unit No.</b>																												
		<b>11. Contract or Grant No.</b> DTNH22-14-D-00352																												
<b>12. Sponsoring Agency Name and Address</b> U.S. Department of Transportation National Highway Traffic Safety Administration Office of Crashworthiness Standards (NRM-100) 1200 New Jersey Ave., SE, Room W43-410 Washington, D.C. 20590		<b>13. Type of Report and Period Covered:</b> Final Test Report January 6, 2021 - March 5, 2021																												
		<b>14. Sponsoring Agency Code</b> NRM-100																												
<b>15. Supplementary Notes</b>																														
<b>16. Abstract</b> <p>A 55/28, (61.90kph / 38.5 mph), 90° Moving Deformable Barrier NCAP Side Impact Test was conducted on the subject 2021 Nissan Rogue SUV in accordance with the specifications of the Office of Crashworthiness Standards Test Procedure for the generation of consumer information on vehicle side crash protection. This test was conducted at Calspan Corporation's Transportation Test Operations facility in Buffalo, New York on January 6, 2021.</p> <p>The impact velocity of the Moving Deformable Barrier (MDB) was 61.81 km/h, and the ambient temperature at the struck (driver's) side of the target vehicle at the time of impact was 21°C. The target vehicle's maximum post-test static crush was 150 mm located at level 2. The test vehicle's occupant performance data is as follows:</p>																														
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th rowspan="2" style="width: 55%;">Measurement Description</th> <th colspan="3" style="text-align: center;">Driver ATD (ES-2re)</th> </tr> <tr> <th style="width: 10%;">Units</th> <th style="width: 10%;">IARV</th> <th style="width: 10%;">Result</th> </tr> </thead> <tbody> <tr> <td>Head Injury Criteria (HIC<sub>36</sub>)</td> <td>N/A</td> <td>1000</td> <td style="background-color: yellow;">95.482</td> </tr> <tr> <td>Maximum Thoracic Rib Deflection</td> <td>mm</td> <td>44</td> <td style="background-color: yellow;">9.150</td> </tr> <tr> <td>Total Abdominal Force</td> <td>N</td> <td>2500</td> <td style="background-color: yellow;">441.058</td> </tr> <tr> <td>Pubic Symphysis Force</td> <td>N</td> <td>6000</td> <td style="background-color: yellow;">1509.935</td> </tr> </tbody> </table>				Measurement Description	Driver ATD (ES-2re)			Units	IARV	Result	Head Injury Criteria (HIC <sub>36</sub> )	N/A	1000	95.482	Maximum Thoracic Rib Deflection	mm	44	9.150	Total Abdominal Force	N	2500	441.058	Pubic Symphysis Force	N	6000	1509.935				
Measurement Description	Driver ATD (ES-2re)																													
	Units	IARV	Result																											
Head Injury Criteria (HIC <sub>36</sub> )	N/A	1000	95.482																											
Maximum Thoracic Rib Deflection	mm	44	9.150																											
Total Abdominal Force	N	2500	441.058																											
Pubic Symphysis Force	N	6000	1509.935																											
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th rowspan="2" style="width: 55%;">Measurement Description</th> <th colspan="3" style="text-align: center;">Passenger ATD (SID-IIs)</th> </tr> <tr> <th style="width: 10%;">Units</th> <th style="width: 10%;">IARV</th> <th style="width: 10%;">Result</th> </tr> </thead> <tbody> <tr> <td>Head Injury Criteria (HIC<sub>36</sub>)</td> <td>N/A</td> <td>1000</td> <td style="background-color: yellow;">160.845</td> </tr> <tr> <td>Lower Spine Resultant Acceleration</td> <td>G</td> <td>82</td> <td style="background-color: yellow;">31.034</td> </tr> <tr> <td>Total Pelvic Force (sum of acetabular and iliac forces)</td> <td>N</td> <td>5525</td> <td style="background-color: yellow;">2282.624</td> </tr> <tr> <td>Maximum Thoracic Rib Deflection</td> <td>mm</td> <td>38*</td> <td style="background-color: yellow;">13.993</td> </tr> <tr> <td>Maximum Abdominal Rib Deflection</td> <td>mm</td> <td>45*</td> <td style="background-color: yellow;">13.718</td> </tr> </tbody> </table>				Measurement Description	Passenger ATD (SID-IIs)			Units	IARV	Result	Head Injury Criteria (HIC <sub>36</sub> )	N/A	1000	160.845	Lower Spine Resultant Acceleration	G	82	31.034	Total Pelvic Force (sum of acetabular and iliac forces)	N	5525	2282.624	Maximum Thoracic Rib Deflection	mm	38*	13.993	Maximum Abdominal Rib Deflection	mm	45*	13.718
Measurement Description	Passenger ATD (SID-IIs)																													
	Units	IARV	Result																											
Head Injury Criteria (HIC <sub>36</sub> )	N/A	1000	160.845																											
Lower Spine Resultant Acceleration	G	82	31.034																											
Total Pelvic Force (sum of acetabular and iliac forces)	N	5525	2282.624																											
Maximum Thoracic Rib Deflection	mm	38*	13.993																											
Maximum Abdominal Rib Deflection	mm	45*	13.718																											
<p>* Proposed IARV</p> <p>The two doors on the struck side of the vehicle did not separate from the body at the hinges or latches and the opposite doors did not open during the side impact event.</p>																														
<b>17. Key Words</b> New Car Assessment Program (NCAP) Side Impact MDB ES-2re SID-IIs		<b>18. Distribution Statement</b> <u>Copies of this report are available from:</u> National Highway Traffic Safety Administration Technical Information Services Division 1200 New Jersey Ave. SE Washington, D.C. 20590																												
<b>19. Security Class. (of this report)</b>  UNCLASSIFIED	<b>20. Security Class. (of this page)</b>  UNCLASSIFIED	<b>21. No. of Pages</b>  195	<b>22. Price</b>																											

## TABLE OF CONTENTS

<u>Section</u>		<u>Page</u>
1	Test Purpose and Procedure	1-1
2	Summary of Test Results	2-1
3	Occupant and Vehicle Information	3-1
 <u>Data Sheet</u>		 <u>Page</u>
1	General Test and Vehicle Parameter Data	3-2
2	Seat, Seat Belt, Steering Wheel Adjustment and Fuel System Data	3-6
3	Dummy Longitudinal Clearance Dimensions	3-10
4	Dummy Lateral Clearance Dimensions	3-11
5	Camera and Instrumentation Data	3-12
6	Test Vehicle Accelerometer Locations	3-13
7	MDB Accelerometer Locations	3-14
8	Post-Test Observations	3-15
9	MDB Summary of Results	3-17
10	Test Vehicle Profile Measurements	3-18
11	Test Vehicle Exterior Crush Measurements	3-19
12	MDB Exterior Static Crush Measurements	3-22
13	Vehicle and MDB Damage Profile Distances	3-23
14	FMVSS No. 301 Static Rollover Results	3-24
15	Dummy/Vehicle Temperature and Humidity Stabilization Data	3-25
 <u>Appendix</u>		 <u>Page</u>
A	Photographs	A-1
B	Vehicle and Dummy Response Data Plots	B-1
C	Dummy Configuration and Performance Verification Data	C-1
D	Test Equipment and Instrumentation Calibration Data	D-1

## **SECTION 1**

### **TEST PURPOSE AND PROCEDURE**

This moving deformable barrier side impact test is part of the MY 2021 New Car Assessment Program Side Impact Test Program, sponsored by the National Highway Traffic Safety Administration (NHTSA), under contract number DTNH22-14-D-00352L. The purpose of this test is to generate comparative side impact performance in a 2021 Nissan Rogue SUV. The side impact test was conducted in accordance with the Office of Crashworthiness Standard's Laboratory Test Procedure dated March 2020.

## SECTION 2

### SUMMARY OF TEST RESULTS

A 2021 Nissan Rogue SUV was impacted on the left (driver's) side by a Moving Deformable Barrier (MDB) which was moving forward in a 27° crabbed position to the tow road guidance system at a velocity of 61.81 km/h. The target vehicle was stationary and was positioned at an angle of 63° to the line of forward motion. The side impact test was conducted by the Calspan Corporation's Transportation Test Operations Center in Buffalo, New York on January 6, 2021. Pre-test and post-test photographs of the test vehicle, the MDB and the dummies (ES-2re and SID-IIs) are included in this report.

Dummies were placed in the driver and left rear designated seating positions according to instructions specified in the OCWS Side Impact Laboratory Test Procedure, dated March 2020. The side impact event was documented by 9 high-speed and 2 real-time cameras. Camera locations are included in this report.

The Dummies were instrumented in the following manner:

#### DRIVER ATD (ES-2re)

Primary and redundant head CG tri-axial accelerometers

Chest upper rib, middle rib, and lower rib y-axis displacement potentiometers

Abdomen forward, middle, and rear y-axis load cells

Lower spine (T12) tri-axial accelerometers

Public symphysis y-axis load cell

#### PASSENGER ATD (SID-IIs)

Primary and redundant head CG tri-axial accelerometers

Chest upper rib, middle rib, and lower rib y-axis displacement potentiometers

Abdomen upper rib and lower rib y-axis displacement potentiometers

Lower spine (T12) tri-axial accelerometers

Acetabulum and iliac wing y-axis load cells

Appendix B contains the vehicle and dummy response data. Dummy configuration and performance verification data can be found in APPENDIX C of this report. Appendix D of this report contains the test equipment and instrumentation calibration data.

### DUMMY INJURY VALUES

Measurement Description	Driver ATD (ES-2re)		
	Units	Threshold	Result
Head Injury Criteria (HIC36)		1000	95.482
Maximum Thorax Rib Deflection	mm	44	9.150
Combined Abdominal Force	N	2500	441.058
Pubic Symphysis Force	N	6000	1509.935

Measurement Description	Passenger ATD (SID-IIs)		
	Units	Threshold	Result
Head Injury Criteria (HIC36)		1000	160.845
Lower Spine (T12) Resultant Acceleration	G	82	31.034
Total Pelvic Force (sum of acetabular and iliac forces)	N	5525	2282.624
Maximum Thoracic Rib Deflection	mm	38*	13.993
Maximum Abdominal Rib Deflection	mm	45*	13.718

\*Proposed IARV

### SUPPLEMENTAL RESTRAINT INFORMATION

Restraint Type	Left Front (Driver) Occupant Location 1		Left Rear (Passenger) Occupant Location 4	
	Mounted	Deployed	Mounted	Deployed
Frontal Air bag	Yes	No		
Knee Air bag	Yes	No		
Side Air bag 1 - Curtain	Yes	Yes	Yes	Yes
Side Air bag 2 – Torso/Pelvis Air bag	Yes	Yes	Yes	Yes
Seat Belt Pretensioner	Yes	Yes	Yes	Yes
Seat Belt Load Limiter	Yes	Yes	Yes	Yes
Other				

#### GENERAL COMMENTS:

1. P1 serial number – F033
2. P4 serial number – DG8012

#### Data Anomalies:

The following channel was questionable for

- Left B-Pillar Lower Y Accel, Exceeded calibration range at 10.5 ms 15.5 ms
- Left B-Pillar Middle Y Accel, Exceeded calibration range and saturated at 11.9 ms

**SECTION 3**  
**OCCUPANT AND VEHICLE INFORMATION**

This section contains information reporting for the following Data Sheets:

Data Sheet No. 1 - General Test and Vehicle Parameter Data

Data Sheet No. 2 – Seat, Seat Belt, Steering Wheel Adjustment and Fuel System Data

Data Sheet No. 3 – Dummy Longitudinal Clearance Dimensions

Data Sheet No. 4 – Dummy Lateral Clearance Dimensions

Data Sheet No. 5 – Camera and Instrumentation Data

Data Sheet No. 6 – Test Vehicle Accelerometer Locations

Data Sheet No. 7 – MDB Accelerometer Locations

Data Sheet No. 8 – Post-Test Observations

Data Sheet No. 9 – MDB Summary of Results

Data Sheet No. 10 – Test Vehicle Profile Measurements

Data Sheet No. 11 – Test Vehicle Exterior Crush Measurements

Data Sheet No. 12 – MDB Exterior Static Crush Measurements

Data Sheet No. 13 – Vehicle and MDB Damage Profile Distances

Data Sheet No. 14 – FMVSS No. 301 Static Rollover Results

Data Sheet No. 15 – Dummy/Vehicle Temperature and Humidity Stabilization Data



**DATA SHEET NO. 1  
GENERAL TEST AND VEHICLE PARAMETER DATA**

Test Vehicle: 2021 Nissan Rogue SUV  
Test Program: NCAP Side MDB Impact Test

NHTSA No.: M20215204  
Test Date: 1/6/2021

**TEST VEHICLE INFORMATION AND OPTIONS**

NHTSA No.	M20215204
Model Year	2021
Make	Nissan
Model	Rogue
Body Style	SUV
VIN	JN8AT3AA4MW000174
Body Color	Gun Metallic
Odometer Reading (km/mi)	22
Engine Displacement (L)	2.5
Type/No. Cylinders	I4
Engine Placement	Transverse
Transmission Type	Automatic
Transmission Speeds	CVT
Overdrive	Yes
Final Drive	Front Wheel Drive
Roof Rack	No
Sunroof/T-Top	No
Running Boards	No
Tilt Steering Wheel	Yes
Power Seats	No
Anti-Lock Brakes (ABS)	Yes

Traction Control System (TCS)	Yes
Auto-Leveling System	No
Automatic Door Locks (ADL)	Yes
Power Window Auto-Reverse	No
Other Optional Feature	-
Driver Front Air bag	Yes
Driver Curtain Air bag	Yes
Driver Head/Torso Air bag	No
Driver Torso Air bag	No
Driver Torso/Pelvis Air bag	Yes
Driver Pelvis Air bag	No
Driver Knee Air bag	Yes
Rear Pass. Curtain Air bag	Yes
Rear Pass. Head/Torso Air bag	No
Rear Pass. Torso Air bag	No
Rear Pass. Torso/Pelvis Air bag	Yes
Rear Pass. Pelvis Air bag	No
Driver Seat Belt Pretensioners	Yes
Rear Pass. Seat Belt Pretensioners	Yes
Driver Load Limiter	Yes
Rear Pass. Load Limiter	Yes
Other Safety Restraint	-

Does owner's manual provide instructions to turn off automatic door locks? No

**DATA FROM CERTIFICATION LABEL**

Manufactured By	Nissan Motor Co.
Date of Manufacture	07/20
Vehicle Type	MPV

GVWR (kg)	4486
GAWR Front (kg)	2359
GAWR Rear (kg)	2238

**VEHICLE SEATING AND WEIGHT CAPACITY DATA**

Measured Parameter	Front	Rear	Third	Total	
Designated Seating Capacity (DSC)	2	3	-	5	
Capacity Weight (VCW) (kg)				408	(A)
DSC X 68.04 kg				340.2	(B)
Cargo Weight (RCLW) (kg)				67.8	(A-B)

**VEHICLE SEAT TYPE**


Seating Location	Type of Seat Pan				Type of Seat Back		
	Bucket	Bench	Split Bench	Contoured	Fixed	Adjustable	
						W/ Lever	W/ Knob
Front Seat	X					X	
Rear or Second Row Seat			X		X		
Third Row seat							

**DATA SHEET NO. 1 ... (CONTINUED)**  
**GENERAL TEST AND VEHICLE PARAMETER DATA**

Test Vehicle: 2021 Nissan Rogue SUV NHTSA No.: M20215204  
 Test Program: NCAP Side MDB Impact Test Test Date: 1/6/2021

**VEHICLE TIRE INFORMATION**

*Collected for year, make, model, & VIN, all items circled in red, tire manufacturer and tire name.*

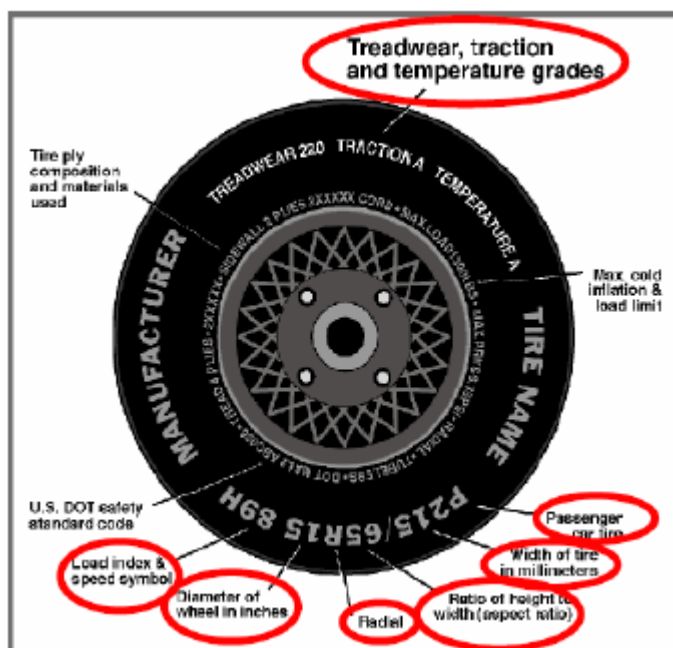

**TIRE SIDEWALL INFORMATION**

Measured Parameter	Front	Rear
Maximum Tire Pressure (kPa)	350	350
Cold Pressure (kPa)	250	230
Recommended Tire Size	235/65R17	235/65R17
Tire Size on Vehicle	235/65R17	235/65R17
Tire Manufacturer	Dunlop	Dunlop
Tire Model	Grand Trek PT21	Grand Trek PT21
Treadwear	360	360
Traction	B	B
Temperature Grade	A	A
Tire Plies Sidewall	2 polyester	2 polyester
Tire Plies Body	2 Polyester, 2 Steel, 2 Polyamide	2 Polyester, 2 Steel, 2 Polyamide
Load Index/Speed Symbol	104H	104H
Tire Material	Rubber	Rubber
DOT Safety Code Left	1V4L83M9R2120	1V4L83M9R2120
DOT Safety Code Right	1V4L83M9R2120	1V4L83M9R2120

**DATA SHEET NO. 1 ... (CONTINUED)**  
**GENERAL TEST AND VEHICLE PARAMETER DATA**

Test Vehicle: 2021 Nissan Rogue SUV NHTSA No.: M20215204  
 Test Program: NCAP Side MDB Impact Test Test Date: 1/6/2021

**TIRE PRESSURES**

	Units	LF	RF	LR	RR
As Delivered	kPa	261	264	243	247
Tire Placard	kPa	250	250	230	230
Owner's Manual	kPa	250	250	230	230
As Tested	kPa	250	250	230	230

**MDB TIRE SPECIFICATIONS**

	Units	Requirement	LF	RF	LR	RR
Tire Size		P205/75R15	P205/75R15	P205/75R15	P205/75R15	P205/75R15
Tire Pressure	kPa	200 ± 21	207	207	207	207

**TEST VEHICLE WEIGHTS**

	Units	As Delivered (UVW)			As Tested (ATW)			Fully Loaded		
		Front	Rear	Total	Front	Rear	Total	Front	Rear	Total
Left	kg	459	317		509	389		500	406	
Right	kg	450	309		456	370		458	368	
Ratio	%	59.2	40.8		55.9	44.1		55.3	44.7	
Totals	kg	909	626	1535	965	759	1724	958	774	1732

**TARGET TEST WEIGHT CALCULATION**

Measured Parameter	Units	Value	
Total Delivered Weight (UVW)	kg	1535	(A)
Sum of Actual Weight of 1 ES2re and 1 P572 ATD (SID-IIs)	kg	127	(B)
Rated Cargo / Luggage Weight (RCLW)	kg	67.8	(C)
Calculated Target Vehicle Test Weight (TVTW)	kg	1729.8	(A+B+C)

Does the measured As Test Vehicle Weight lie within the required weight range  
 (i.e. Calculated Test Vehicle Target Weight – 4.5 kg to – 9 kg)?  Yes  No

**TEST VEHICLE ATTITUDES AND CG**

Measurement Description	Units	Fully Loaded	As Tested	Meets Requirement**
LF	mm	906	904	Yes
RF	mm	905	905	Yes
RR	mm	917	912	Yes
LR	mm	914	908	Yes
Vehicle CG (Aft of Front Axle)	mm	1206	1188	
Vehicle CG (Left+)/Right(-) from Longitudinal Centerline)	mm	37	33	

\*\*\* The "As Tested" vehicle attitude measurements must be equal to or within ± 10mm of the "Fully Loaded" vehicle attitude measurements at each wheel well. Indicate "Yes" or "No" for "Meets Requirements".

Test height adjustable suspension setting, if applicable: N/A

**DATA SHEET NO. 1 ... (CONTINUED)**  
**GENERAL TEST AND VEHICLE PARAMETER DATA**

Test Vehicle: 2021 Nissan Rogue SUV NHTSA No.: M20215204  
 Test Program: NCAP Side MDB Impact Test Test Date: 1/6/2021

**WEIGHT OF BALLAST AND VEHICLE COMPONENTS REMOVED TO MEET TVTW**

Component Description	Weight (kg)
Trunk Carpeting	10
Spare Tire	16
Jack	3
<b>Ballast / Equipment Added</b>	
	27

**TEST SURFACE MARKINGS**

	Distance from 63° Impact Angle Line (mm)
Fore 25 mm target	908
Aft 25 mm target	908
Pre-Impact Angle Line	236

Parallel Track Target	X Location (mm)	Y Location (mm)
A	0	0
B	2955	1555
C	2955	3555
D	0	3000

**DATA SHEET NO. 2**  
**SEAT, SEAT BELT, STEERING WHEEL ADJUSTMENT AND FUEL SYSTEM DATA**

Test Vehicle: <u>2021 Nissan Rogue SUV</u>	NHTSA No.: <u>M20215204</u>
Test Program: <u>NCAP Side MDB Impact Test</u>	Test Date: <u>1/6/2021</u>

**SEAT POSITIONING**

The driver's seat, front center seat (if applicable), and right front passenger's seat should be set to the mid-track, lowest, mid-angle position. The struck-side rear passenger's seat, rear center seat, and non-struck side rear passengers' seats should be set to the rear-most, lowest, mid-angle position.

**SCRL ANGLE RANGE**

Seat	SCRL (°)		
	Max	Min	Mid
Driver Seat	17.2	12.7	15.8
Front Passenger Seat	Not Adjustable		
Front Center Seat*	-	-	-
Struck Side Rear Seat	Fixed	Fixed	Fixed
Non-Struck Side Rear Seat	Fixed	Fixed	Fixed
Rear Center Seat*	Fixed	Fixed	Fixed

\*if applicable

**SEAT HEIGHT AND ANGLE**

Seat	As Tested SCRL Angle (Mid) (°)	As Tested SCRP Height (mm)	SCRP Height Position	SCRP Height (mm)		
				Rearmost	Mid-Fore/Aft	Forward-Most
Driver Seat	15.8	28	Max	-	-	-
			Mid	0	28	58
			Min	-	-	-
Front Passenger Seat	Not Adjustable		Max	-	-	-
			Mid	-	-	-
			Min	-	-	-
Front Center Seat*	N/A	N/A	Max	-	-	-
			Mid	-	-	-
			Min	-	-	-
Struck Side Rear Seat	Fixed	Fixed	Max	-	-	-
			Mid	-	-	-
			Min	-	-	-
Non-Struck Side Rear Seat	Fixed	Fixed	Max	-	-	-
			Mid	-	-	-
			Min	-	-	-
Rear Center Seat*	Fixed	Fixed	Max	-	-	-
			Mid	-	-	-
			Min	-	-	-

\*if applicable

**DATA SHEET NO. 2 ... (CONTINUED)**  
**SEAT, SEAT BELT, STEERING WHEEL ADJUSTMENT AND FUEL SYSTEM DATA**

Test Vehicle:	2021 Nissan Rogue SUV	NHTSA No.:	M20215204
Test Program:	NCAP Side MDB Impact Test	Test Date:	1/6/2021


**SEAT FORE / AFT POSITION**

Seat	Total Fore / Aft Travel		Test Position from Forwardmost Position	
	mm	Detents*	mm	Detent*
Driver Seat	260	27 (0-26)	130	13
Front Passenger Seat	260	27 (0-26)	130	13
Front Center Seat*	-	-	-	-
Struck Side Rear Seat	Fixed	Fixed	Fixed	Fixed
Non-Struck Side Rear Seat	Fixed	Fixed	Fixed	Fixed
Rear Center Seat*	Fixed	Fixed	Fixed	Fixed

*\*if applicable*

**SEAT BACK ANGLE ADJUSTMENT**

*The driver's seat back is positioned to the manufacturer's designated design angle. The front center and front passenger's seat backs are positioned in a similar manner as the driver's seat back. The struck side rear seat back is positioned such that the dummy's head is level. The rear center and non-struck side rear outboard seat backs are positioned in a similar manner as the struck-side rear seat back.*

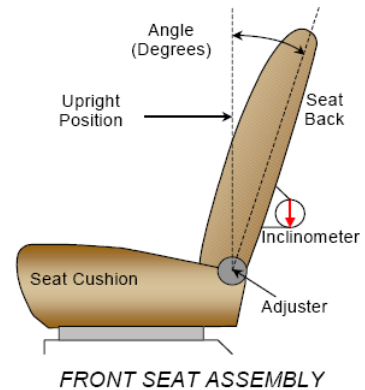

Seat	Total Seat Back Angle Range		Test Position from Most Upright	
	Degrees	Detents*	Degrees	Detents*
Driver Seat w/ Seated Dummy	73.3	15	4.8	9
Front Passenger Seat	69.7	15	2.3	9
Front Center Seat*	-	-	-	-
Struck Side Rear Seat w/ Seated Dummy	Fixed	Fixed	Fixed	Fixed
Non-Struck Side Rear Seat	Fixed	Fixed	Fixed	Fixed
Rear Center Seat*	Fixed	Fixed	Fixed	Fixed

*\*if applicable*

**DATA SHEET NO. 2 ... (CONTINUED)**  
**SEAT, SEAT BELT, STEERING WHEEL ADJUSTMENT AND FUEL SYSTEM DATA**

Test Vehicle: 2021 Nissan Rogue SUV NHTSA No.: M20215204  
 Test Program: NCAP Side MDB Impact Test Test Date: 1/6/2021

**SEAT BELT ANCHORAGE ADJUSTMENT**

*Seat belt anchorages are adjusted in accordance with the information provided by the manufacturer on Form No. 1. For this test zero is defined as the uppermost position.*

	Total # of Positions	Placed in Position #
Driver Seat	4 (0-3)	0 (Uppermost)
Rear Seat	Fixed	Fixed

**HEAD RESTRAINT ADJUSTMENT**


*The driver's head restraint is adjusted to the highest and most full forward in-use position. The struck-side rear passenger's head restraint is adjusted to the lowest and most full forward in-use position.*

	Total # of Positions	Placed in Position #
Driver Seat	5 (0-4)	0 (Uppermost)
Rear Seat	1	Lowest

**STEERING COLUMN ADJUSTMENT**

*Steering wheel and column adjustments are made so that the steering wheel hub is at the center of its geometric locus it describes when it moves through its full range of motion.*


	Degrees	Fore/Aft Position (mm)
Lowermost – Position 1	22.3	
Geometric Center – Position 2	24.9	
Uppermost – Position 3	27.5	
Telescoping Steering Wheel Travel		60
Test Position	24.9	30



**FUEL PUMP**

*Describe the fuel pump type, details about how it operates, and the location of the fuel filler neck.*

The vehicle is equipped with an electric fuel pump. The fuel filler neck is on the left side of the vehicle. The pump creates positive pressure in the fuel lines, pushing the gasoline to the engine. See form 1 for more information.

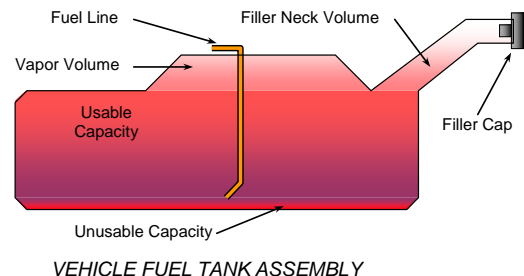

**DATA SHEET NO. 2 ... (CONTINUED)**  
**SEAT, SEAT BELT, STEERING WHEEL ADJUSTMENT AND FUEL SYSTEM DATA**

Test Vehicle: 2021 Nissan Rogue SUV NHTSA No.: M20215204  
 Test Program: NCAP Side MDB Impact Test Test Date: 1/6/2021

**FUEL TANK CAPACITY**

	<b>Liters</b>
Usable Capacity of "Standard Tank" (see Form No. 1)	58.3
Usable Capacity of "Optional Tank" (see Form No. 1)	-
Usable Capacity of Standard Tank (see Owner's Manual)	55
Usable Capacity of Optional Tank (see Owner's Manual)	-
93% of Usable Capacity	54.1
Actual Amount of Solvent Used in Test	54.1
1/3 of Usable Capacity	19.4


Is the Actual Amount of Solvent Used in the test equal to 93% ± 1% of the Usable Capacity stated in Form No. 1?  **Yes**  **No**



**DATA SHEET NO. 3  
DUMMY LONGITUDINAL CLEARANCE DIMENSIONS**

Test Vehicle: 2021 Nissan Rogue SUV  
 Test Program: NCAP Side MDB Impact Test

NHTSA No.: M20215204  
 Test Date: 1/6/2021

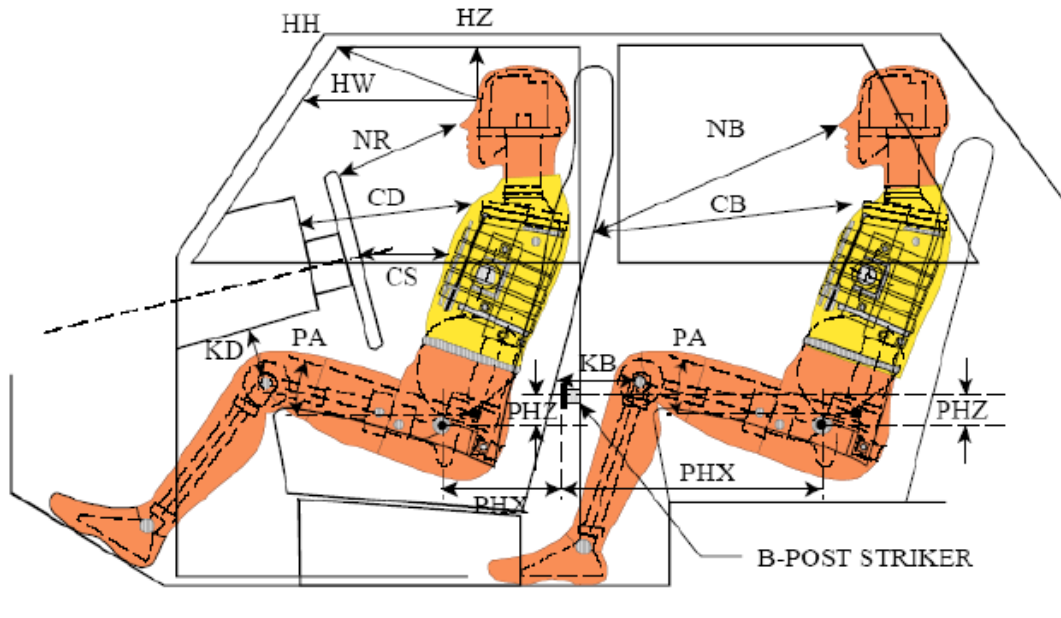

**LEFT SIDE VIEW**

NOTE: 2-DOOR VEHICLE SHOWN.  
 REAR DUMMY PHX & PHZ  
 MEASUREMENTS FOR A 4-DOOR  
 VEHICLE WOULD USE THE C-POST  
 STRIKER AS A REFERENCE POINT


**DUMMY LONGITUDINAL CLEARANCE DIMENSION INFORMATION**

Driver Code	Pass. Code	Description	Driver (Serial No.F033)		Passenger (Serial No.DG8012)	
			Length (mm)	Angle	Length (mm)	Angle
HH		Header to Header	372			
HW		Header to Windshield	622			
HZ	HZ	Head to Roof Liner	188		298	
NR	NB	Nose to Rim/Seat Back	450		611	
CD	CB	Chest to Dash/Seat Back	544		625	
CS		Chest to Steering Wheel	345			
KD(L)/KDA(L)°	KB(L)/KBA(L)°	Left Knee to Dash/Seat Back	152	26.4	365	0.4
KD(R)/KDA(R)°	KB(R)/KBA(R)°	Right Knee to Dash/Seat Back	145	23.1	365	0.4
PAX°	PAX°	Pelvic Tilt Angle X		21.3		18.8
	PAY°	Pelvic Tilt Angle Y				0.3
PHX	PHX	Hip Point to Striker (X-Axis)	239		192	
PHZ	PHZ	Hip Point to Striker (Z-Axis)	125		201	

**DATA SHEET NO. 4  
DUMMY LATERAL CLEARANCE DIMENSIONS**

Test Vehicle: 2021 Nissan Rogue SUV  
 Test Program: NCAP Side MDB Impact Test

NHTSA No.: M20215204  
 Test Date: 1/6/2021

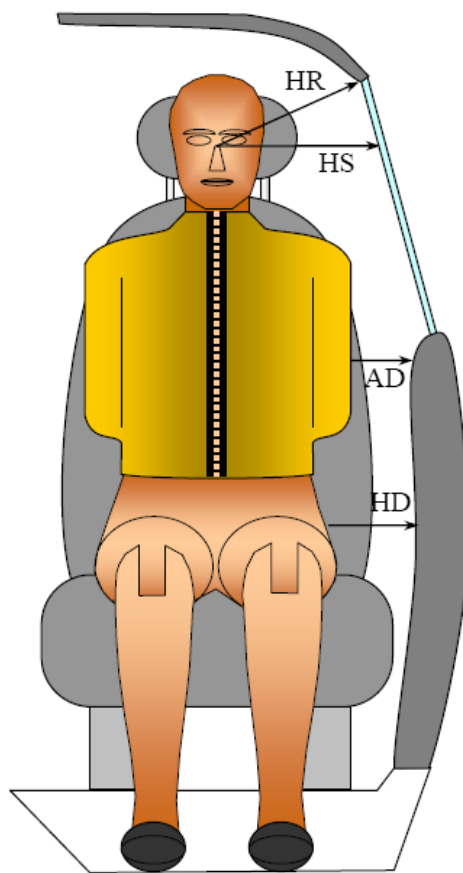

*FRONT VIEW OF DUMMY*


**DUMMY LATERAL CLEARANCE DIMENSION INFORMATION**

Code	Measurement Description	Units	Driver (Serial No. F033)	Passenger (Serial No.DG8012)
HR	Head to Side Header	mm	210	258
HS	Head to Side Window	mm	330	355
AD	Arm to Door	mm	75	120
HD	Hip Point to Door	mm	159	155

**DATA SHEET NO. 5  
CAMERA AND INSTRUMENTATION DATA**

Test Vehicle: 2021 Nissan Rogue SUV  
 Test Program: NCAP Side MDB Impact Test

NHTSA No.: M20215204  
 Test Date: 1/6/2021

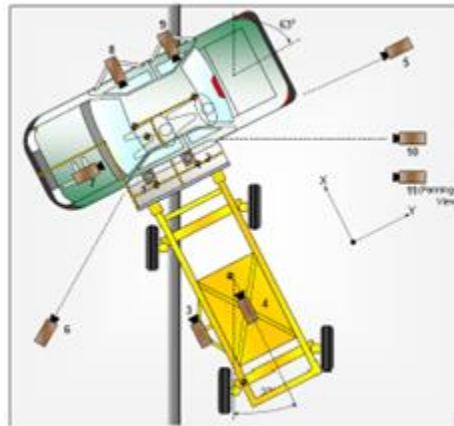

**CAMERA LOCATIONS AND DATA**

No.	Camera View	Coordinates (mm)			Lens Length (mm)	Operating Frame Rate (fps)
		X	Y	Z		
1	Overhead Overall	0	0	-8385	12.5	1000
2	Overhead Close-up	0	0	-8385	24	1000
3	Left Impact Point (MDB)				25	1000
4	Side Overall (MDB)				8	1000
5	Rear	0	7162	-1426	24	1000
6	Left Front	-3153	5626	-1273	24	1000
7	Driver Front (OB)				25	1000
8	Driver Side (OB)				12.5	1000
9	Passenger Side (OB)				12.5	1000
10	Real-time Left Rear				Zoom	60
11	Real-time In run				Zoom	60

Notes: Reference: Impact Point projected to Ground  
 +X = To Front of MDB, +Y = To Right of MDB, +Z = Down  
 \*All measurements accurate to ± 6 mm.

If applicable, explain why camera(s) did not operate as intended: All cameras operated normally


**INSTRUMENTATION**

Driver Dummy Channels	16
Passenger Dummy Channels	16
Vehicle Structure Accelerometers	23
MDB Accelerometers	7
<b>Total</b>	<b>62</b>

**DATA SHEET NO. 6**  
**TEST VEHICLE ACCELEROMETER LOCATIONS**

Test Vehicle: 2021 Nissan Rogue SUV  
Test Program: NCAP Side MDB Impact Test

NHTSA No.: M20215204  
Test Date: 1/6/2021

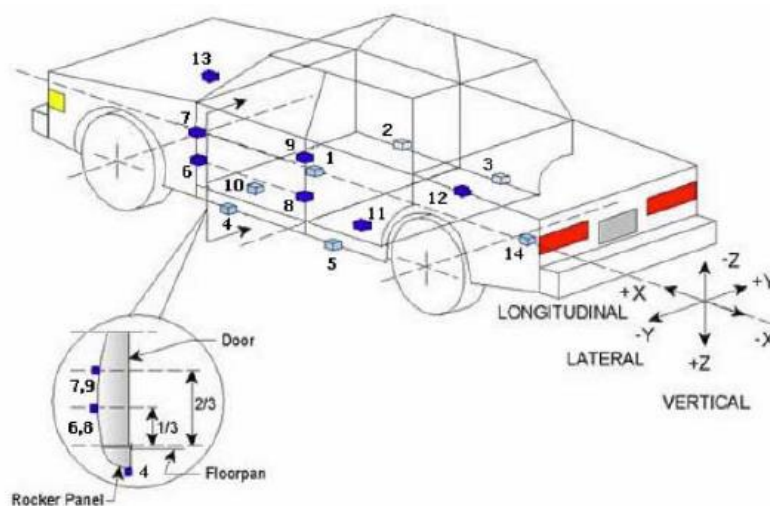

**TEST VEHICLE ACCELEROMETER LOCATIONS**


No.	Accelerometer Location	Coordinates (mm)		
		X	Y	Z
1	Vehicle CG	2689	4	-19
2	Right Sill at Front Seat	2882	640	143
3	Right Sill at Rear Seat	1915	637	140
4	Left Sill at Front Door	2925	-644	151
5	Left Sill at Rear Door	1912	-639	146
6	A-Post Lower	3268	-614	-94
7	A-Post Middle	3211	-647	-587
8	B-Post Lower	2187	-678	-106
9	B-Post Middle	2126	-663	-373
10	Front Seat Track	2371	-548	125
11	Rear Seat Structure	1570	-480	51
12	Rt. Rear Occ. Compartment	2169	384	230
13	Engine Block	3879	134	-317
14	Rear Above Axle	1126	-44	-43

Reference: X – Rear surface of vehicle (+ forward)  
Y – Vehicle centerline (+ to right)  
Z – Ground plane (+ down)

**DATA SHEET NO. 7  
MDB ACCELEROMETER LOCATIONS**

Test Vehicle: 2021 Nissan Rogue SUV  
 Test Program: NCAP Side MDB Impact Test

NHTSA No.: M20215204  
 Test Date: 1/6/2021

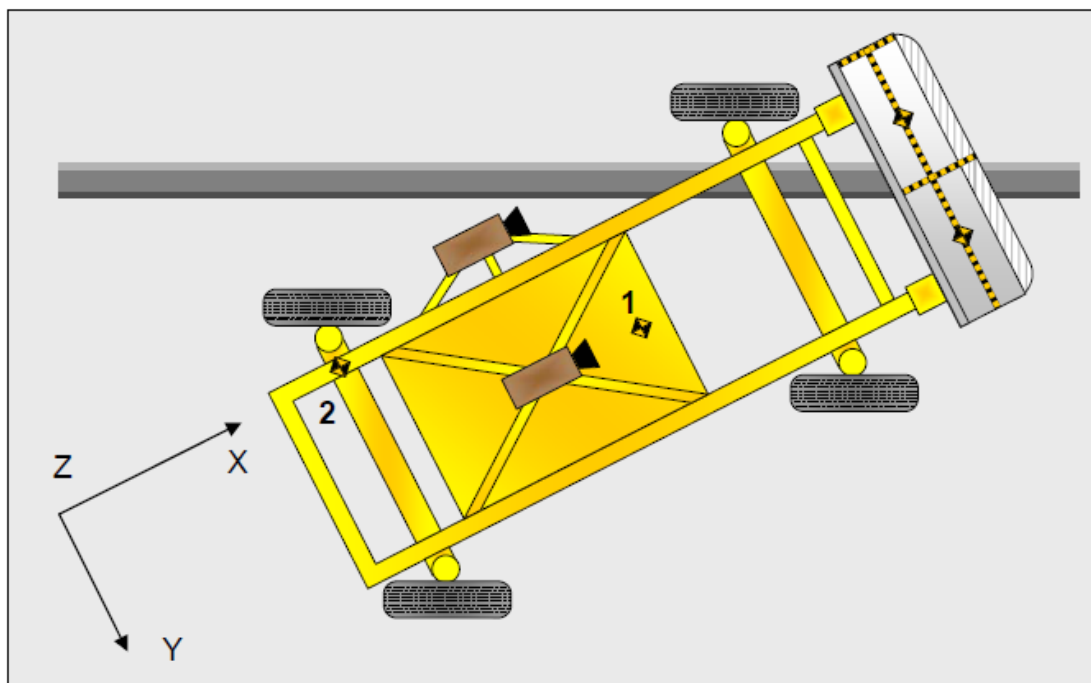

**MDB ACCELEROMETER LOCATIONS**

No.	Accelerometer Location	Coordinates (mm)		
		X	Y	Z
1	MDB CG	1859	0	-330
2	MDB Rear	386	-660	-660

*Reference: X – Face of MDB (+ forward)  
 Y – MDB centerline (+ to right)  
 Z – Ground plane (+ down)*

Width between Left and Right Contact Switches (mm)

1455

**DATA SHEET NO. 8  
POST-TEST OBSERVATIONS**

Test Vehicle: 2021 Nissan Rogue SUV NHTSA No.: M20215204  
 Test Program: NCAP Side MDB Impact Test Test Date: 1/6/2021

**TEST DUMMY INFORMATION AND CONTACT POINTS**

Dummy Body Part	Front Seat Dummy (ES-2re)	Rear Seat Dummy (SID-IIs)
Face	Curtain Airbag	Curtain Airbag
Top of Head	Curtain Airbag	Curtain Airbag
Left Side of Head	Curtain Airbag	Curtain Airbag
Back of Head	Curtain Airbag, Headrest	Curtain Airbag, Headrest
Left Shoulder	Torso/Pelvis Airbag, Curtain Airbag	Seatback, Curtain Airbag, Torso/Pelvis Airbag
Upper Torso	Seatback, Torso/Pelvis Airbag	Seatback, Torso/Pelvis Airbag
Lower Torso	Seatback, Torso/Pelvis Airbag	Seatback, Torso/Pelvis Airbag
Left Hip	Seatpan, Torso/Pelvis Airbag	Torso/Pelvis Airbag
Left Knee	Driver Door	Passenger Door

**POST-TEST DOOR PERFORMANCE**

Description	Struck Side		Non-Struck Side		Rear Hatch/Other
	Front	Rear	Front	Rear	
Remained Closed and Operational	No	No	Yes	Yes	Yes
Total Separation from Vehicle at Hinges or Latches	No	No	No	No	No
Latch or Hinge Systems Pulled Out of Their Anchorages	No	No	No	No	No
Disengaged from Latched Position	No	No	No	No	No
Latch Separated from Striker	No	No	No	No	No
Jammed Shut	Yes	Yes	No	No	No
If Door Opened at Striker, Width of Opening at Striker (mm)	0	0	0	0	0

**POST-TEST SEAT PERFORMANCE**

Description	Struck Side		Non-Struck Side	
	Front	Rear	Front	Rear
Seat Movement Along Seat Track	No	No	No	No
Seat Disengagement from Floor Pan	No	No	No	No
Seat Back Movement from Initial Position	No	No	No	No
Seat Back Collapse	No	No	No	No

**POST-TEST STRUCTURAL OBSERVATIONS**

Critical Areas of Performance	Observations and Conclusions
Pillar Performance	B-Pillar Buckled
Sill Separation	None
Windshield Damage	None
Side Window Damage	Rear Passenger window shattered
Other Notable Effects	None

**DATA SHEET NO. 8 ... (CONTINUED)  
POST-TEST OBSERVATIONS**

Test Vehicle: 2021 Nissan Rogue SUV NHTSA No.: M20215204  
 Test Program: NCAP Side MDB Impact Test Test Date: 1/6/2021

**SUPPLEMENTAL RESTRAINT SYSTEM INFORMATION**

Restraint Type	Struck Side Driver		Struck Side Rear Passenger	
	Mounted	Deployed	Mounted	Deployed
Frontal Air bag	Yes	No		
Knee Air bag	Yes	No		
Side Air bag 1 - Curtain	Yes	Yes	Yes	Yes
Side Air bag 2 - Torso/Pelvis Air bag	Yes	Yes	Yes	Yes
Seat Belt Pretensioner	Yes	Yes	Yes	Yes
Seat Belt Load Limiter	Yes	Yes	Yes	Yes
Other				

**IMPACT POINT LOCATION DATA**

Measured Parameter	Units	Tolerance	Value
Vehicle Wheel Base	mm		2704
Vertical Impact Reference Line (Aft of Front Axle - Intended Impact Point)	mm		410
Actual Impact Point (Aft of Frontal Axle)	mm		413
Horizontal Offset (+ forward / - rearward)	mm	+/- 50 of Intended Impact Point	-3
Vertical Offset (+ down / - up)	mm	+/- 20 of Intended Impact Point	-1

**DATA SHEET NO. 9  
MDB SUMMARY OF RESULTS**

Test Vehicle: 2021 Nissan Rogue SUV  
 Test Program: NCAP Side MDB Impact Test

NHTSA No.: M20215204  
 Test Date: 1/6/2021

**MDB SPECIFICATIONS**

Measurement Description	Length (mm)
Overall Width of Framework Carriage	1,250
Overall Length Including Honeycomb Frame	4,120
Wheelbase of Framework Carriage	2,600
CG Location of Front Axle	1,120

**MDB WEIGHTS**

	Units	Front Axle	Rear Axle	Total
Left	kg	392.5	297.5	690
Right	kg	386	291.5	677.5
Ratio	%	57.4	42.6	100%
Totals	kg	778.5	589	1367.5

**SPEED AND ANGLE AT IMPACT DATA**

Measured Parameter	Units	Requirement	Value
Trap No. 1 Velocity (Primary)	km/h	61.10 to 62.70	61.81
Trap No. 2 Velocity (Redundant)	km/h	61.10 to 62.70	61.76
MDB CL to Target Vehicle CL	degrees	88.5 to 91.5	90.0
MDB Forward Line of Motion to Target Vehicle CL	degrees	62.5 to 63.5	63.0
MDB Crabbed angle to MDB Forward Line of Motion	degrees	26.0 to 28.0	27.0

**MAXIMUM STATIC CRUSH OF HONEYCOMB IMPACT FACE**


Vertical Location			From Centerline		Maximum Crush (mm)
Row	Description	Height (mm)	Distance (mm)	Direction	
A	Center of Bumper	432	800	Right	262
B	Top of Bumper	533	800	Left	175
C	Mid-Level	686	800	Right	161
D	Top of Stack	813	800	Right	184



**DATA SHEET NO. 10  
TEST VEHICLE PROFILE MEASUREMENTS**

Test Vehicle: 2021 Nissan Rogue SUV  
 Test Program: NCAP Side MDB Impact Test

NHTSA No.: M20215204  
 Test Date: 1/6/2021

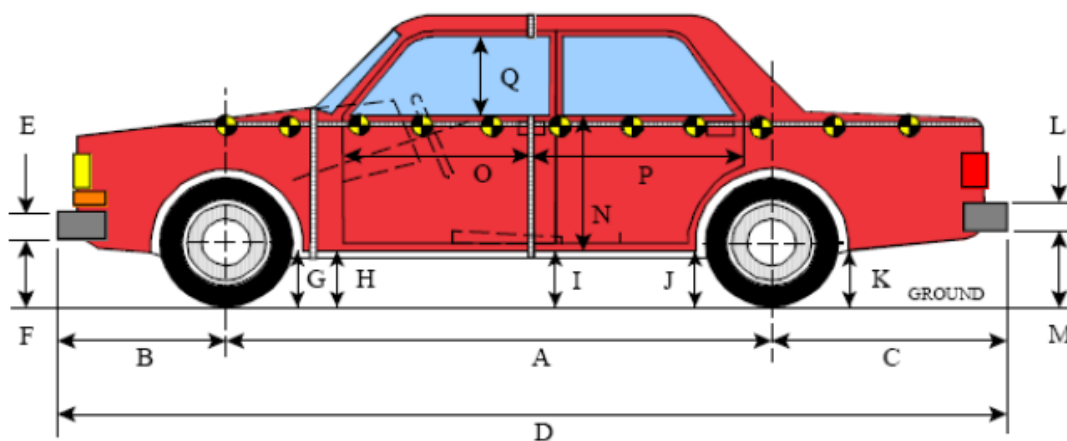

**LEFT SIDE VIEW**

All MEASUREMENTS IN (mm) WITH TOLERANCE OF  $\pm 3$ mm


**VEHICLE PRE- AND POST-TEST MEASUREMENT INFORMATION**

Code	Description	Pre-Test	Post-Test	Difference
A	Wheelbase	2704	2702	-2
B	Front Axle to FSOV	940	943	3
C	Rear Axle to RSOV	1007	1004	-3
D	Total Length at Centerline	4647	4649	2
E	Front Bumper Thickness	305	305	0
F	Front Bumper Bottom to Ground	299	304	5
G	Sill Height at Front Wheel Well	306	308	2
H	Sill Height at Front Door Leading Edge	309	308	-1
I	Sill Height at B Pillar	315	312	-3
J1	Sill Height at Rear Wheel Well	320	315	-5
J2	Pinch Weld Height at Rear Wheel Well	295	290	-5
K	Sill Height Aft of Rear Wheel Well	300	302	2
L	Rear Bumper Thickness	235	235	0
M	Rear Bumper Bottom to Ground	297	297	0
N	Sill Height to Window Bottom of Front Window Sill	838	829	-9
O	Front Door Leading Edge to Impact CL	756	752	-4
P	Rear Door Trailing Edge to Impact CL	1418	1382	-36
Q	Front Window Opening	479	481	2
R	Right Side Length	4538	4542	4
S	Left Side Length	4540	4544	4
T	Maximum Vehicle Width	1829	1787	-42

**DATA SHEET NO. 11**  
**TEST VEHICLE EXTERIOR CRUSH MEASUREMENTS**

Test Vehicle: 2021 Nissan Rogue SUV  
 Test Program: NCAP Side MDB Impact Test

NHTSA No.: M20215204  
 Test Date: 1/6/2021

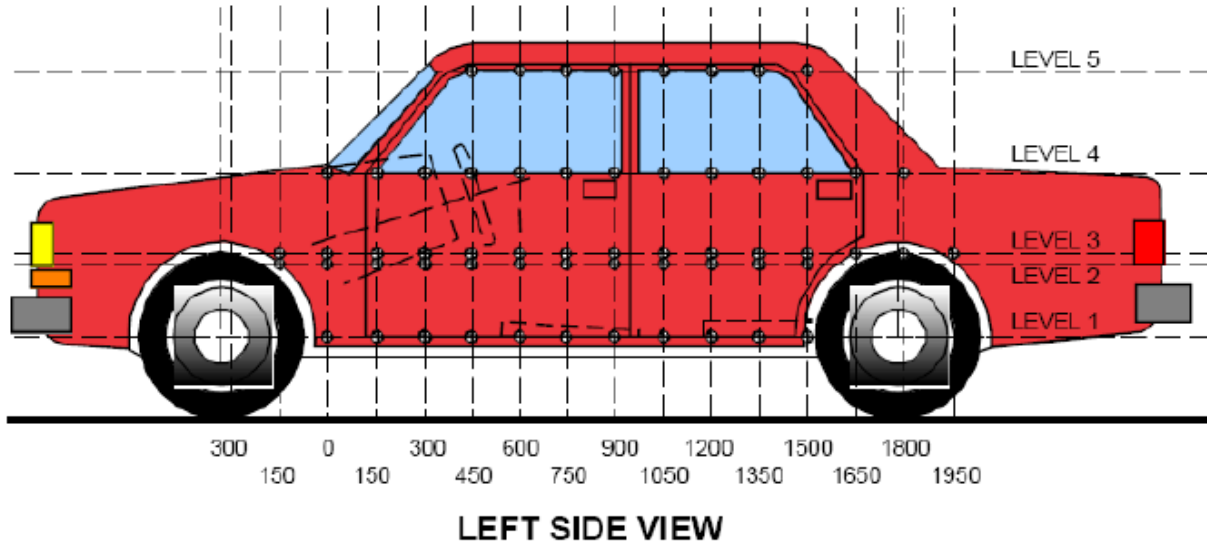

**MAXIMUM EXTERIOR CRUSH MEASUREMENTS**

Level	Measurement Description	Units	Height Above Ground	Maximum Exterior Static Crush	Distance from Impact
1	Sill Top	mm	358	53	150
2	Driver Hip Point	mm	703	150	600
3	Mid-Door	mm	815	140	1650
4	Window Sill	mm	1114	49	1500
5	Window Top	mm	1626	2	1050

\*window top level bent outward from original position

**NOTE:** The above measurements should be taken along the vertical impact reference line. Vehicle measurements forward of the vertical impact reference line are negative.

**DATA SHEET NO. 11 ... (CONTINUED)**  
**TEST VEHICLE EXTERIOR CRUSH MEASUREMENTS**

Test Vehicle: 2021 Nissan Rogue SUV  
 Test Program: NCAP Side MDB Impact Test

NHTSA No.: M20215204  
 Test Date: 1/6/2021

**EXTERIOR CRUSH MEASUREMENTS AT EACH LEVEL**


	Pre-Test					Post-Test					Difference				
	1	2	3	4	5	1	2	3	4	5	1	2	3	4	5
-900															
-750															
-600															
-450															
-300															
-150			924	813				918	813				6	0	
0		914	914	823			902	906	820			12	8	3	
150	912	916	916	821		859	822	837	845		53	94	79	-24	
300	910	911	914	816		868	766	804	831		42	145	110	-15	
450	908	908	913	822		870	761	799	833		38	147	114	-11	
600	906	908	912	827		872	758	785	834		34	150	127	-7	
750	903	907	911	832		874	763	774	836		29	144	137	-4	
900	901	906	909	836	608	877	775	782	841	607	24	131	127	-5	1
1050	899	904	906	840	618	878	804	814	843	616	21	100	92	-3	2
1200	894	899	902	842	621	867	844	848	821	619	27	55	54	21	2
1350	889	896	899	841	620	869	781	801	822	619	20	115	98	19	1
1500	884	893	896	839	618	869	751	761	790	617	15	142	135	49	1
1650	884	900	898	840	615	876	753	758	795	614	8	147	140	45	1
1800	885	912	910	851	611	887	792	771	821	610	-2	120	139	30	1
1950		919	910	867	606		894	848	851	605		25	62	16	1
2100			920	876	598			907	879	598			13	-3	0
2250				878	589				888	589				-10	0
2400				876	574				871	575				5	-1
2550				869	557				867	557				2	0
2700				857					856					1	
2850															
3000															

**NOTE:** Pre-test measurements are taken when the vehicle is in the "As Tested" weight condition.  
 Vehicle measurements forward of the vertical impact reference line are negative.  
 The crush profile grid is established prior to test based on an estimated impact point.

**DATA SHEET NO. 11 (CONTINUED)**  
**TEST VEHICLE EXTERIOR CRUSH MEASUREMENTS**

Test Vehicle: 2021 Nissan Rogue SUV  
 Test Program: NCAP Side MDB Impact Test

NHTSA No.: M20215204  
 Test Date: 1/6/2021

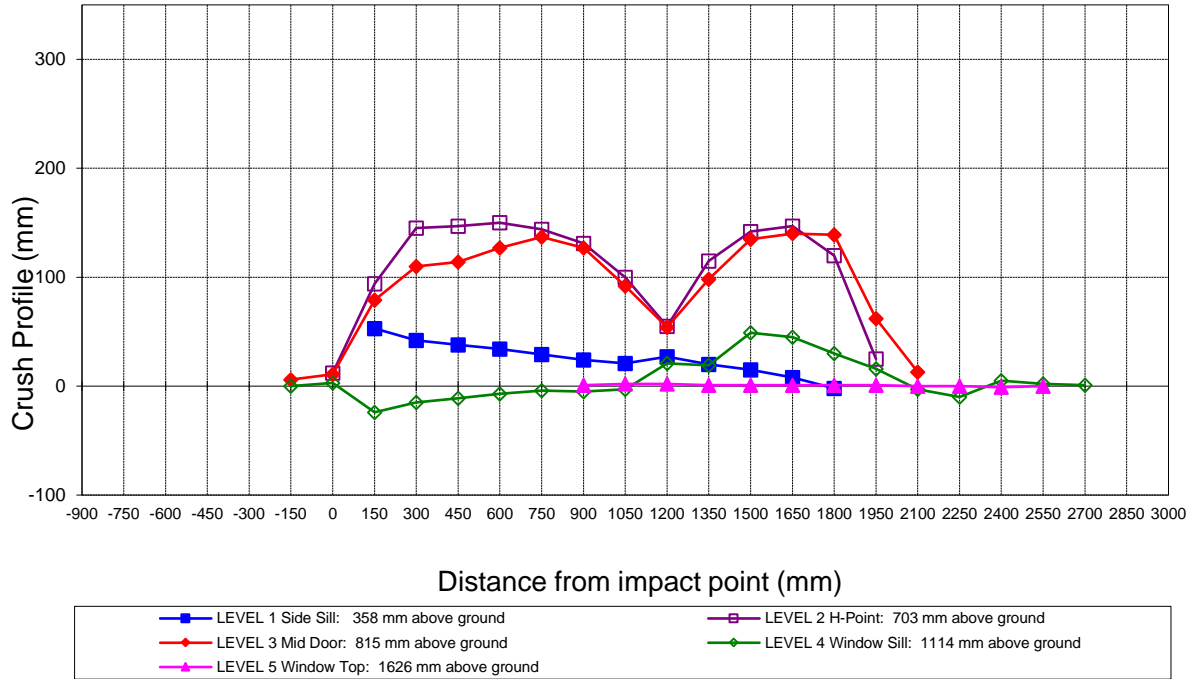


**Vehicle Exterior Crush Measurements - Visual Representation**

**DATA SHEET NO. 12  
MDB EXTERIOR STATIC CRUSH MEASUREMENTS**

Test Vehicle: 2021 Nissan Rogue SUV  
 Test Program: NCAP Side MDB Impact Test

NHTSA No.: M20215204  
 Test Date: 1/6/2021

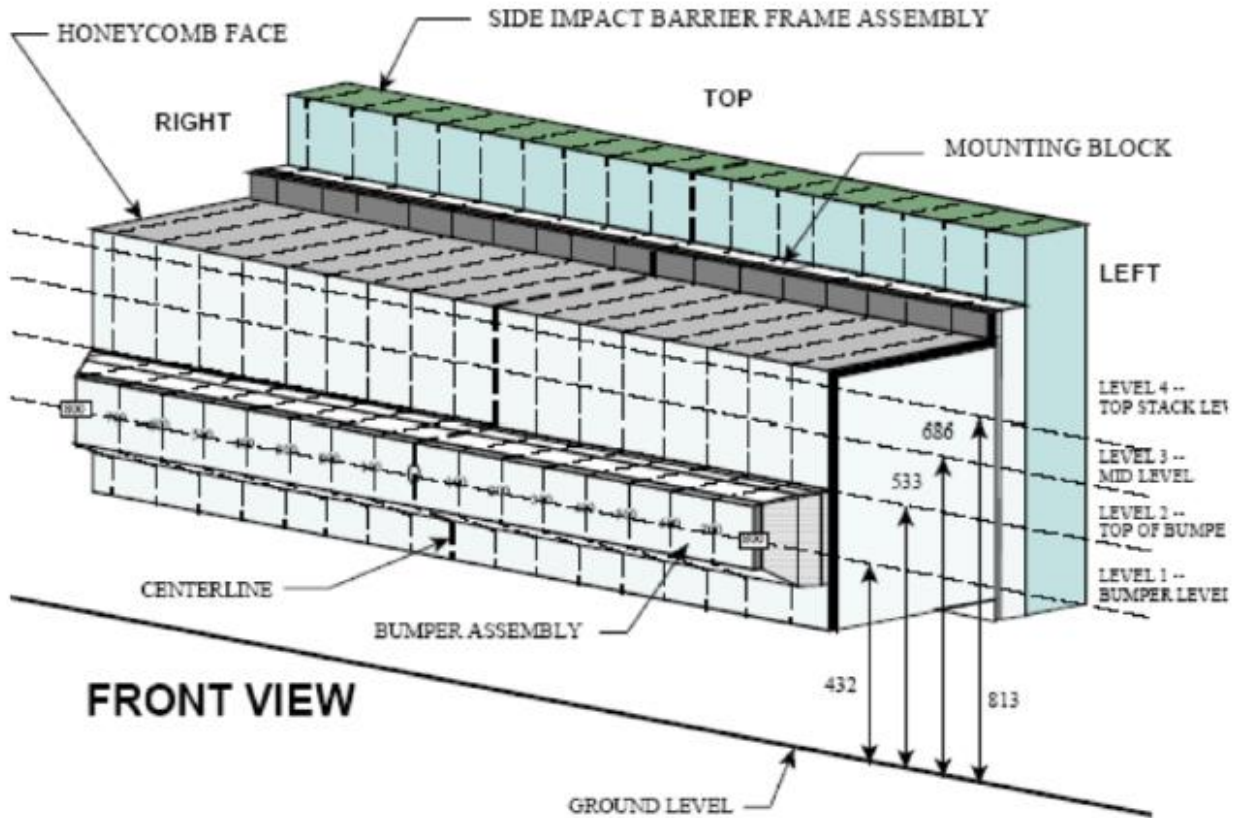

NOTE: Dimensions are shown in millimeters, mm

**DEFORMABLE BARRIER STATIC CRUSH**


Stack Level	Distance Right of Center								C/L	Distance Left of Center							
	800	700	600	500	400	300	200	100		0	100	200	300	400	500	600	700
1	262	245	243	242	241	240	240	239	238	237	236	234	233	232	231	231	244
2	129	131	144	152	163	158	164	161	164	161	157	158	157	155	154	155	175
3	86	75	71	82	101	141	161	125	101	86	78	76	76	79	87	99	160
4	83	77	73	83	115	160	184	145	116	100	83	94	112	116	132	151	182

**DATA SHEET NO. 13**  
**VEHICLE AND MDB DAMAGE PROFILE DISTANCES**

Test Vehicle: 2021 Nissan Rogue SUV  
Test Program: NCAP Side MDB Impact Test

NHTSA No.: M20215204  
Test Date: 1/6/2021

For guidance regarding damage profile distance measurements, please refer to the latest version of the *NHTSA Test Reference Guide, Volume 1: Vehicle Tests*.

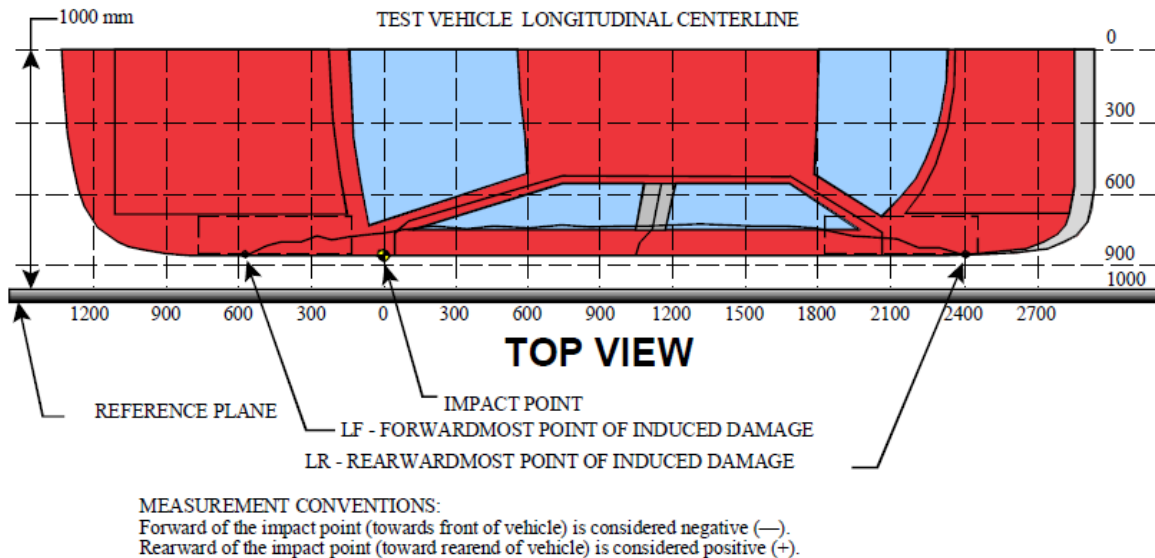

**VEHICLE DAMAGE PROFILE DISTANCES**

DPD	Distance From Impact Point (mm)	Level	Post-Test (mm)	Pre-Test (mm)	Crush (mm)
1	-150	3	82	76	6
2	300	3	196	86	110
3	750	3	226	89	137
4	1200	3	152	98	54
5	1650	3	242	102	140
6	2100	3	93	80	13

**MDB DAMAGE PROFILE DISTANCES**

DPD	Distance From Center of MDB	Level	Post-Test (mm)*
1	800 mm left of center	1	244
2	480 mm left of center	1	232
3	160 mm left of center	1	237
4	160 mm right of center	1	240
5	480 mm right of center	1	242
6	800 mm right of center	1	262

**DATA SHEET NO. 14  
FMVSS NO. 301 STATIC ROLLOVER RESULTS**

Test Vehicle:	<u>2021 Nissan Rogue SUV</u>	NHTSA No.:	<u>M20215204</u>
Test Program:	<u>NCAP Side MDB Impact Test</u>	Test Date:	<u>1/6/2021</u>
Test Time:	<u>10:58 AM</u>	Temperature:	<u>21°C</u>

- |   |                             |     |
|---|-----------------------------|-----|
| A. From impact until vehicle motion ceases:<br>(Maximum allowable is 1 oz.)     | <u>0</u>                    | oz. |
| B. For the 5-minute period after motion ceases:<br>(Maximum allowable is 5 oz.) | <u>0</u>                    | oz. |
| C. For the following 25 minutes:<br>(Maximum allowable is 1 oz./minute)         | <u>0</u>                    | oz. |
| D. Spillage Details:  | <u>No Spillage Occurred</u> |     |

**FMVSS NO. 301 STATIC ROLLOVER DATA**



**ROLLOVER SOLVENT COLLECTION TIME TABLE IN SECONDS**

Test Phase	Rotation Time	Hold Time	Total Time
0° to 90°	71	300	371
90° to 180°	68	300	368
180° to 270°	70	300	370
270° to 360°	70	300	370

**FMVSS NO. 301 ROLLOVER SPILLAGE TABLE**

Test Phase	First 5 Minutes	Sixth Minute	Seventh Minute	Eighth Minute
0° to 90°	0	0	0	
90° to 180°	0	0	0	
180° to 270°	0	0	0	
270° to 360°	0	0	0	


**ROLLOVER SOLVENT SPILLAGE LOCATION TABLE**

Test Phase	Spillage Location
0° to 90°	None
90° to 180°	None
180° to 270°	None
270° to 360°	None

**DATA SHEET NO. 15**  
**DUMMY/VEHICLE TEMPERATURE AND HUMIDITY STABILIZATION DATA**

Test Vehicle: 2021 Nissan Rogue SUV  
Test Program: NCAP Side MDB Impact Test

NHTSA No.: M20215204  
Test Date: 1/6/2021

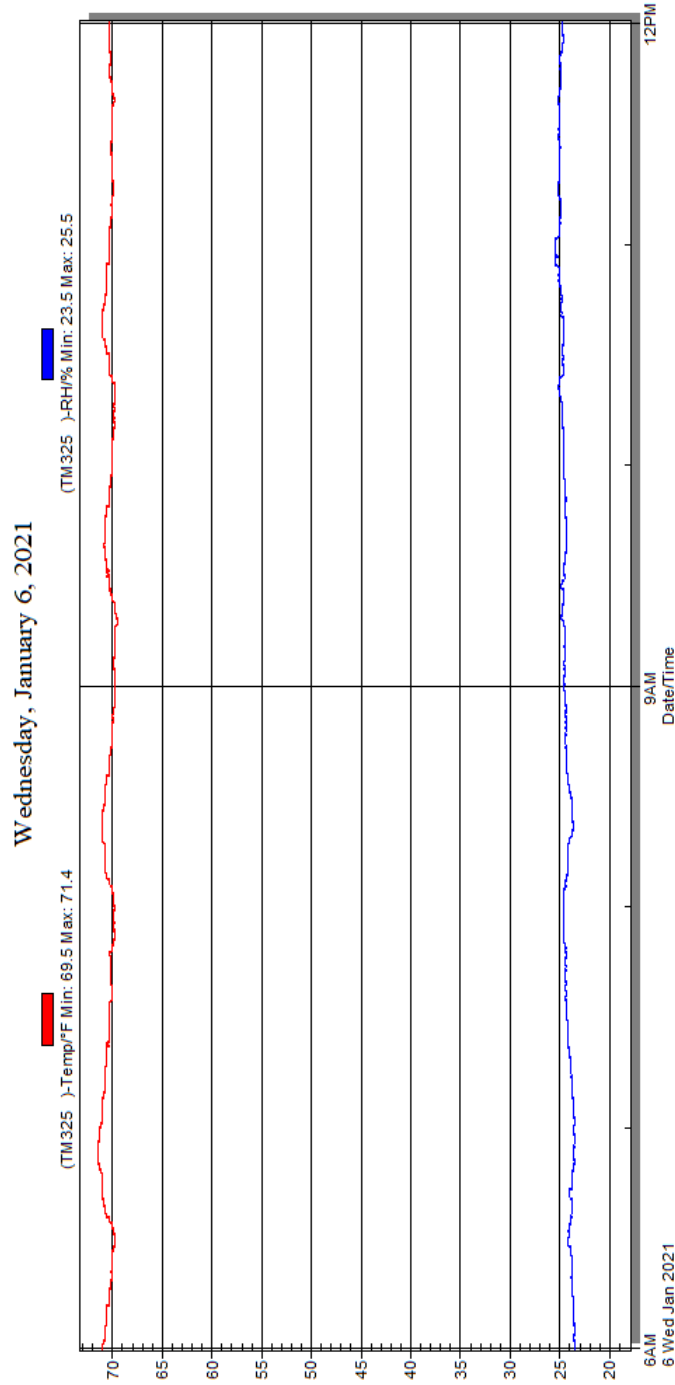

**Temperature and Humidity Stabilization Chart/Data for Dummies and Test Vehicle**



**APPENDIX A**  
**PHOTOGRAPHS**

## TABLE OF PHOTOGRAPHS

Fig.	Description	Page
1	As-Delivered Right Front 3/4 View of Test Vehicle	A-5
2	As-Delivered Left Rear 3/4 View of Test Vehicle	A-5
3	Pre-Test Frontal View of Test Vehicle	A-6
4	Post-Test Frontal View of Test Vehicle	A-6
5	Pre-Test Left Front 3/4 View of Test Vehicle	A-7
6	Post-Test Left Front 3/4 View of Test Vehicle	A-7
7	Pre-Test Left Side View of Test Vehicle	A-8
8	Post-Test Left Side View of Test Vehicle	A-8
9	Pre-Test Left Rear 3/4 View of Test Vehicle	A-9
10	Post-Test Left Rear 3/4 View of Test Vehicle	A-9
11	Pre-Test Rear View of Test Vehicle	A-10
12	Post-Test Rear View of Test Vehicle	A-10
13	Pre-Test Right Side View of Test Vehicle	A-11
14	Post-Test Right Side View of Test Vehicle	A-11
15	Pre-Test Overhead View of Test Area	A-12
16	Post-Test Overhead View of Test Area	A-12
17	Pre-Test Left Side View of MDB Positioned Against Side of Test Vehicle	A-13
18	Pre-Test Right Side View of MDB Positioned Against Side of Test Vehicle	A-13
19	Pre-Test Close-Up View of Impact Point Target	A-14
20	Post-Test Close-up View of Impact Point Target	A-14
21	Pre-Test Left Front Door Latch Close-Up	A-15
22	Post-Test Left Front Door Latch Close-Up	A-15
23	Pre-Test Left Rear Door Latch Close-Up	A-16
24	Post-Test Left Rear Door Latch Close-Up	A-16
25	Pre-Test Front Close-up View of Driver Dummy	A-17
26	Post-Test Front Close-up View of Driver Dummy	A-17
27	Pre-Test Left Side View of Driver Dummy Showing Belt and Chalking	A-18
28	Pre-Test Left Side View of Driver Dummy Shoulder and Door Top View	A-18
29	Post-Test Left Side View of Driver Dummy Shoulder and Door Top View	A-19
30	Pre-Test Frontal View of Driver Seat Back Prior to Dummy Positioning	A-19
31	Pre-Test Frontal View of Driver Dummy Head and Shoulders in Relation to Head Restraint	A-20
32	Pre-Test Frontal View of Driver Seat Pan Prior to Dummy Positioning	A-20
33	Pre-Test Overhead View of Driver Dummy Thighs on Seat Pan	A-21
34	Pre-Test Placement of Driver Dummy's Feet	A-21

<b>Fig.</b>	<b>Description</b>	<b>Page</b>
35	Pre-Test View of Belt Anchorage for Driver Dummy	A-22
36	Pre-Test Left Side View of Steering Wheel	A-22
37	View of Disengaged Parking Brake	A-23
38	Pre-Test View of Parking Brake	A-23
39	Pre-Test Close-Up Left Side View of Driver Seat Track	A-24
40	Pre-Test Close-Up Left Side View of Driver Seat Back	A-24
41	Pre-Test Close-Up View of Driver Seat Back or Head Restraint	A-25
42	Pre-Test Driver Dummy and Door Clearance View	A-25
43	Post-Test Driver Dummy and Door Clearance View	A-26
44	Pre-Test Right Side View of Driver Dummy and Front Seat of Occupant Compartment	A-26
45	Post-Test Right Side View of Driver Dummy and Front Seat of Occupant Compartment	A-27
46	Pre-Test Driver Inner Door Panel View	A-27
47	Post-Test Driver Inner Door Panel View Showing Driver Dummy Contact Locations	A-28
48	Post-Test Driver Dummy Close-Up Head Contact with Vehicle View	A-28
49	Post-Test Driver Dummy Close-Up Head Contact with Side Air bag View	A-29
50	Post-Test Driver Dummy Close-Up Torso Contact with Vehicle Interior View	A-29
51	Post-Test Driver Dummy Close-Up Torso Contact with Side Air bag View	A-30
52	Post-Test Driver Dummy Close-Up Pelvis Contact View	A-30
53	Post-Test Driver Dummy Close-Up Pelvis Contact with Side Air bag View	A-31
54	Post-Test Driver Dummy Close-Up Knee Contact View	A-31
55	Pre-Test Left Side View of Rear Passenger Dummy Showing Belt and Chalking	A-32
56	Pre-Test Left Side View of Rear Passenger Dummy Shoulder and Door Top View	A-32
57	Post-Test Left Side View of Rear Passenger Dummy Shoulder and Door Top View	A-33
58	Pre-Test Frontal View of Rear Passenger Seat Back Prior to Dummy Positioning	A-33
59	Pre-Test Frontal View of Rear Passenger Dummy Head and Shoulders in Relation to Head Restraint	A-34
60	Pre-Test Overhead View of Rear Passenger Seat Pan Prior to Dummy Positioning	A-34
61	Pre-Test Overhead View of Rear Passenger Dummy Thighs on Seat Pan	A-35
62	Pre-Test View of Rear Passenger Dummy's Neck Showing Position of Adjustable Neck Bracket	A-35
63	Pre-Test View of Rear Passenger Dummy's Head Showing Dummy's Head is Level	A-36
64	Pre-Test Placement of Rear Passenger Dummy's Feet	A-36
65	Pre-Test View of Belt Anchorage for Rear Passenger Dummy	A-37
66	Pre-Test Close-Up Left Side View of Rear Passenger Seat Track	A-37
67	Pre-test Close-Up Left Side View of Rear Passenger Seat Back	A-38
68	Pre-Test Close-Up View of Rear Passenger Seat Back or Head Restraint	A-38

<b>Fig.</b>	<b>Description</b>	<b>Page</b>
69	Pre-Test Rear Passenger Dummy and Door Clearance View	A-39
70	Post-Test Rear Passenger Dummy and Door Clearance View	A-39
71	Pre-Test Right Side View of Rear Passenger Dummy and Rear Seat Occupant Compartment	A-40
72	Post-Test Right Side View of Rear Passenger Dummy and Rear Seat Occupant Compartment	A-40
73	Pre-Test Rear Passenger Inner Door Panel View	A-41
74	Post-Test Rear Passenger Inner Door Panel View Showing Rear Passenger Dummy Contact Locations	A-41
75	Post-Test Rear Passenger Dummy Close-Up Head Contact with Vehicle View	A-42
76	Post-Test Rear Passenger Dummy Close-Up Head Contact with Side Air bag View	A-42
77	Post-Test Rear Passenger Dummy Close-Up Torso Contact with Vehicle Interior View	A-43
78	Post-Test Rear Passenger Dummy Close-Up Torso Contact with Side Air bag View	A-43
79	Post-Test Rear Passenger Dummy Close-Up Pelvis Contact View	A-44
80	Post-Test Rear Passenger Dummy Close-Up Pelvis Contact with Side Air bag View	A-44
81	Post-Test Rear Passenger Dummy Close-Up Knee Contact View	A-45
82	Pre-Test View of Fuel Filler Cap or Fuel Filler Neck	A-45
83	Post-Test View of Fuel Filler Cap or Fuel Filler Neck	A-46
84	Pre-Test Front View of MDB Impactor Face	A-46
85	Post-Test Front View of MDB Impactor Face	A-47
86	Pre-Test Top View of MDB Impactor Face	A-47
87	Post-Test Top View of MDB Impactor Face	A-48
88	Pre-Test Left Side View of MDB Impactor Face	A-48
89	Post-Test Left Side View of MDB Impactor Face	A-49
90	Pre-Test Right Side View of MDB Impactor Face	A-49
91	Post-Test Right Side View of MDB Impactor Face	A-50
92	Close-Up View of Vehicle's Certification Label	A-50
93	Close-Up View of Vehicle's Tire Information Placard or Label	A-51
94	Pre-Test Ballast View	A-51
95	Post-Test Primary and Redundant Speed Trap Read-Out	A-52
96	FMVSS No. 301 Static Rollover 0 Degrees	A-52
97	FMVSS No. 301 Static Rollover 90 Degrees	A-53
98	FMVSS No. 301 Static Rollover 180 Degrees	A-53
99	FMVSS No. 301 Static Rollover 270 Degrees	A-54
100	FMVSS No. 301 Static Rollover 360 Degrees	A-54
101	Impact Event	A-55
102	Monroney Label	A-55
103	Driver Head Restraint Use and Adjustment Information from Vehicle Owner's Manual	A-56
104	Left Rear Passenger Head Restraint Use and Adjustment Information from Vehicle Owner's Manual	A-56



**M20215204**

**Figure A-1: As-Delivered Right Front 3/4 View of Test Vehicle**



**M20215204**

**Figure A-2: As-Delivered Left Rear 3/4 View of Test Vehicle**



**Figure A-3: Pre-Test Frontal View of Test Vehicle**




**Figure A-4: Post-Test Frontal View of Test Vehicle**



**Figure A-5: Pre-Test Left Front  $\frac{3}{4}$  View of Test Vehicle**



**Figure A-6: Post-Test Left Front  $\frac{3}{4}$  View of Test Vehicle**

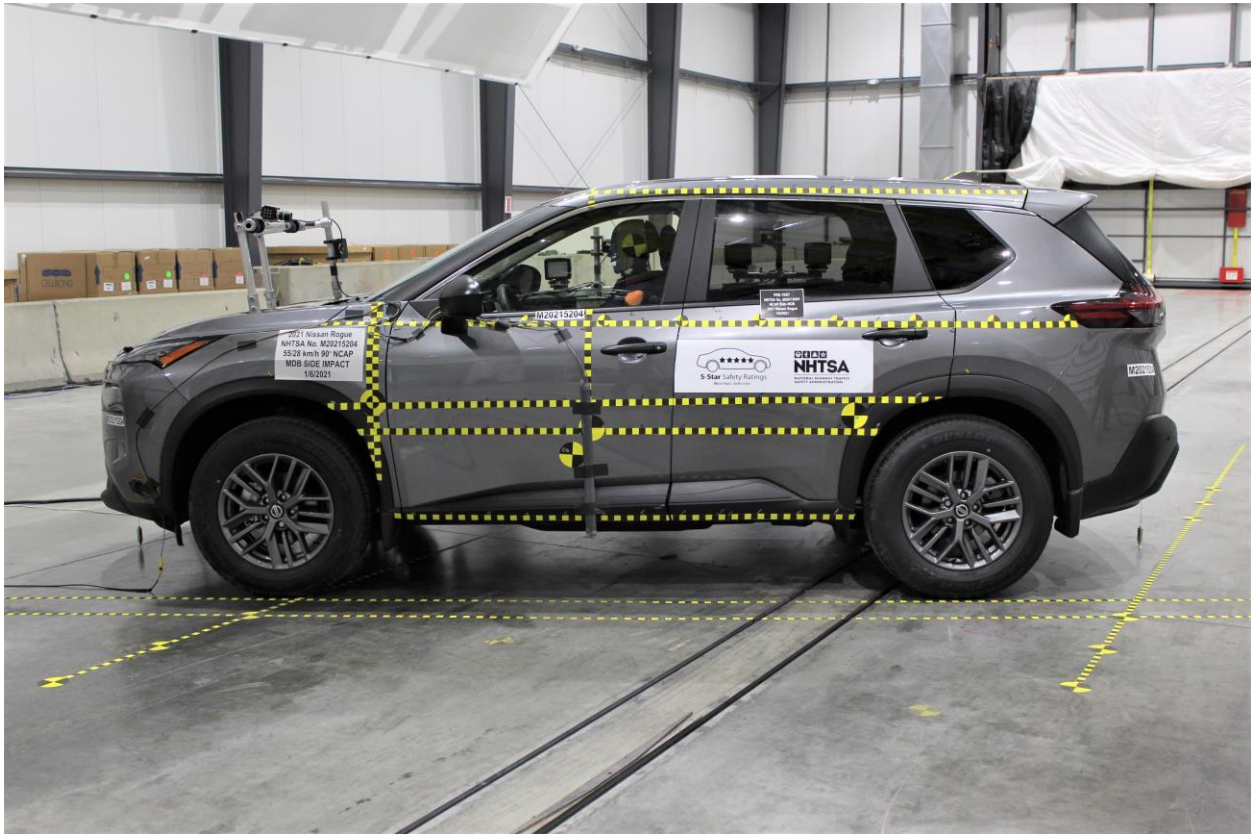

**Figure A-7: Pre-Test Left Side View of Test Vehicle**



**Figure A-8: Post-Test Left Side View of Test Vehicle**





**Figure A-9: Pre-Test Left Rear  $\frac{3}{4}$  View of Test Vehicle**



**Figure A-10: Post-Test Left Rear  $\frac{3}{4}$  View of Test Vehicle**



**Figure A-11: Pre-Test Rear View of Test Vehicle**




**Figure A-12: Post-Test Rear View of Test Vehicle**




**Figure A-13: Pre-Test Right Side View of Test Vehicle**



**Figure A-14: Post-Test Right Side View of Test Vehicle**

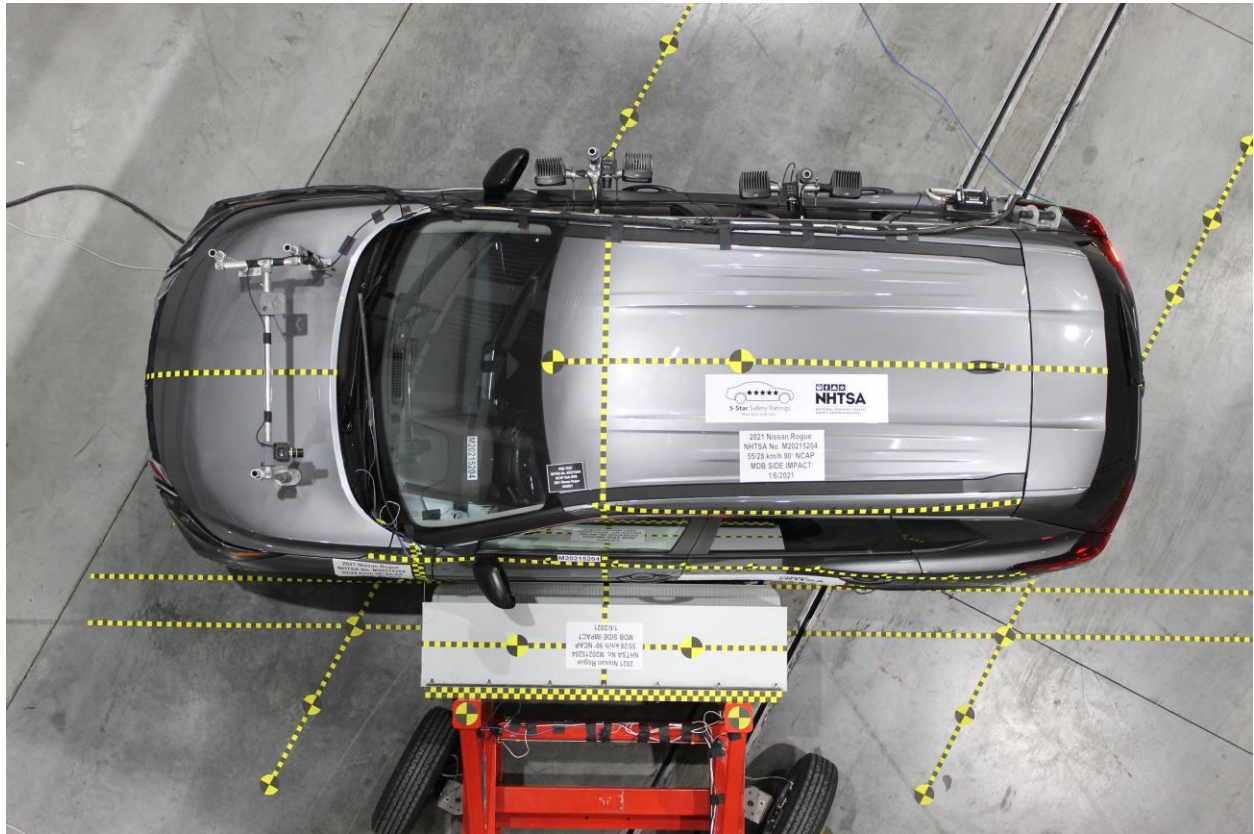

**Figure A-15: Pre-Test Overhead View of the Test Area**

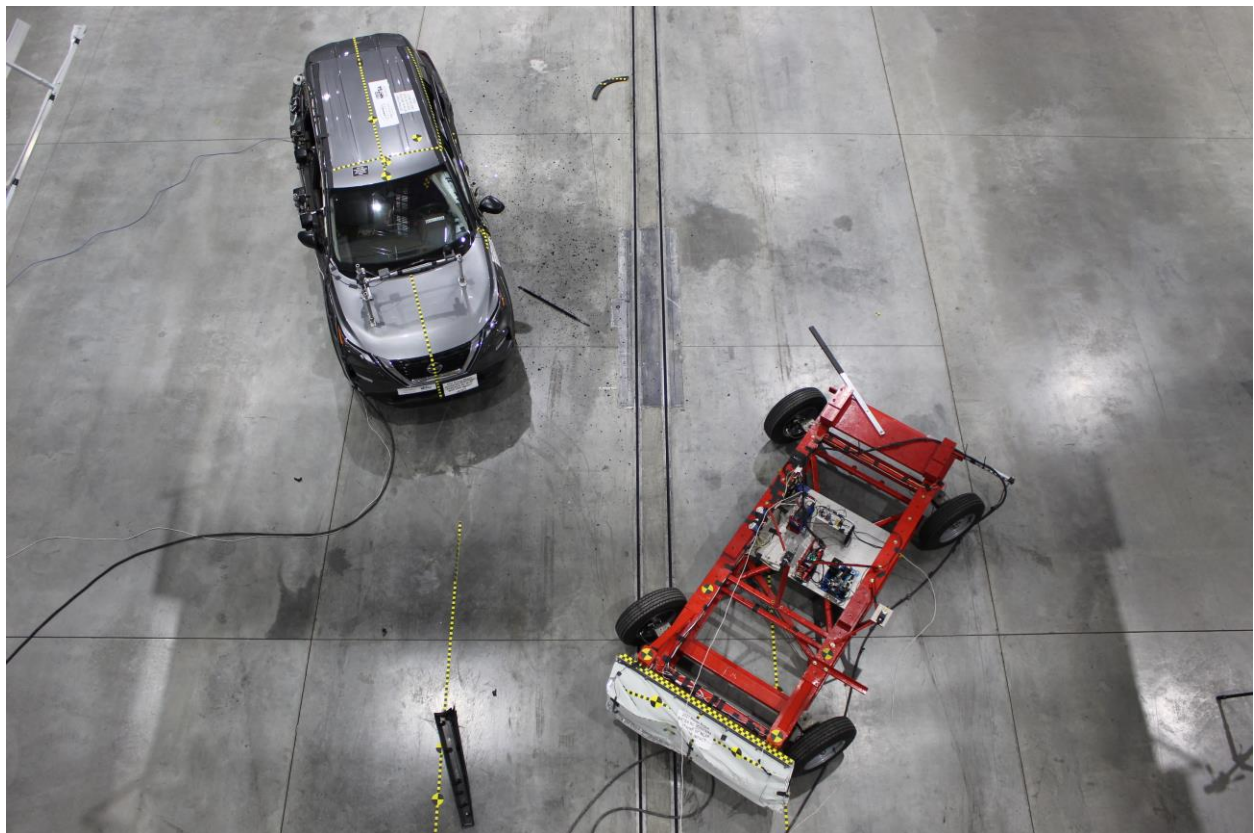

**Figure A-16: Post-Test Overhead View of Test Area**



**Figure A-17: Pre-Test Left Side View of MDB Positioned Against Side of Test Vehicle**



**Figure A-18: Pre-Test Right Side View of MDB Positioned Against Side of Test Vehicle**



Figure A-19: Pre-Test Close-up View of Impact Point Target



Figure A-20: Post-Test Close-up View of Impact Point Target



Figure A-21: Pre-Test Left Front Door Latch Close-Up

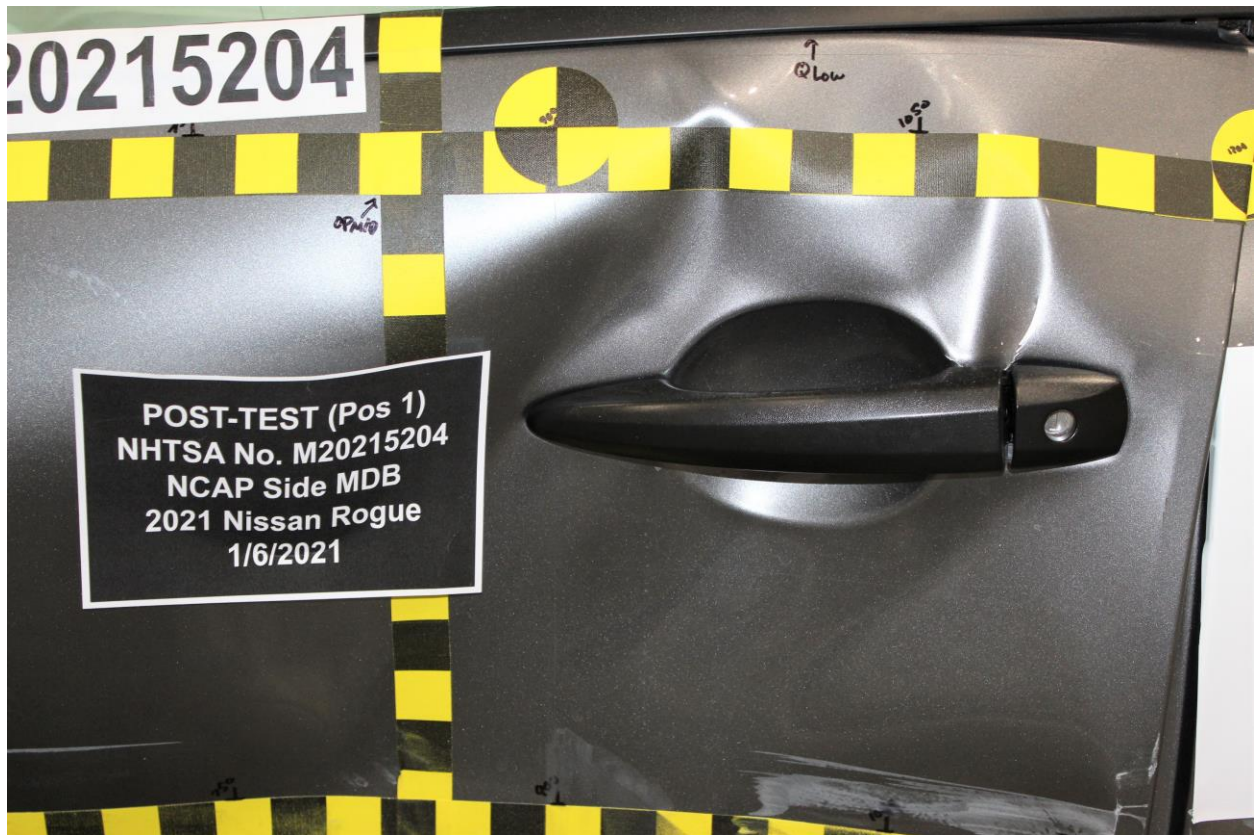


Figure A-22: Post-Test Left Front Door Latch Close-Up



Figure A-23: Pre-Test Left Rear Door Latch Close-Up



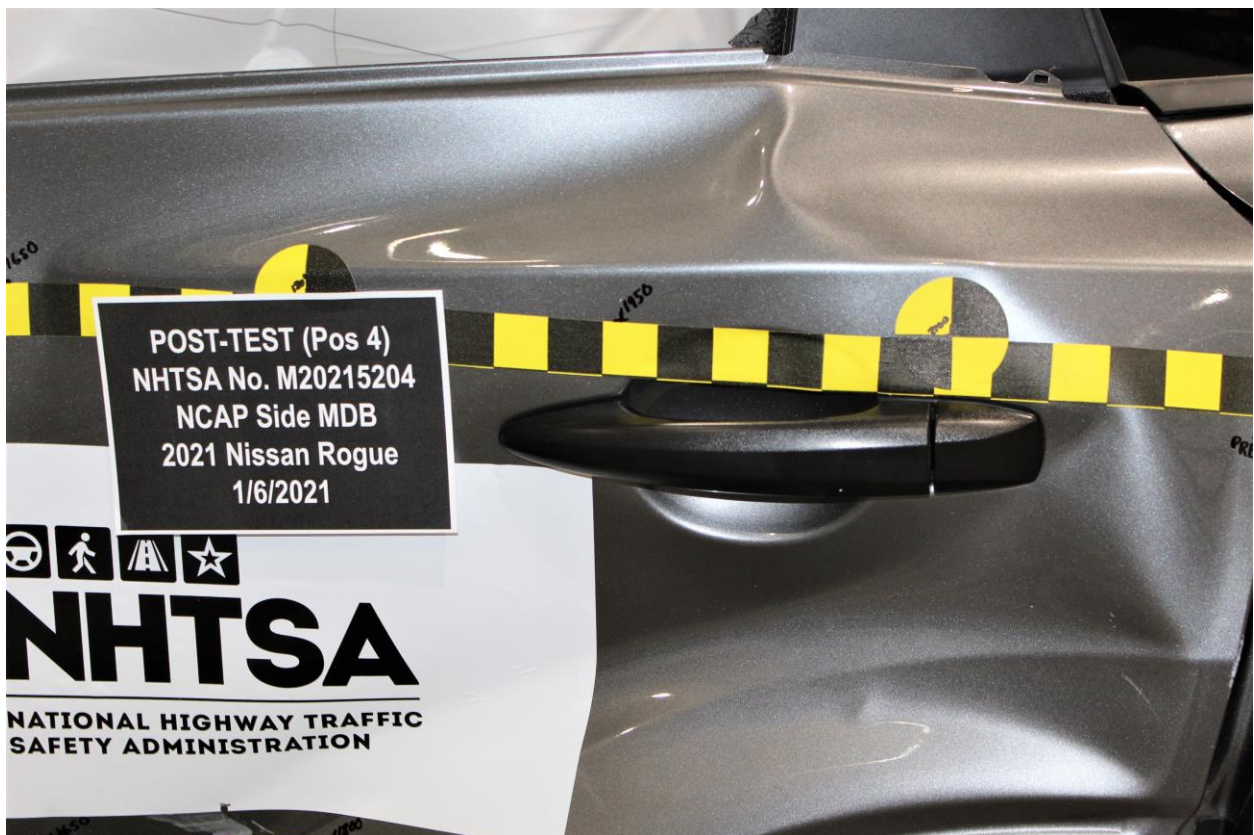


Figure A-24: Post-Test Left Rear Door Latch Close-Up



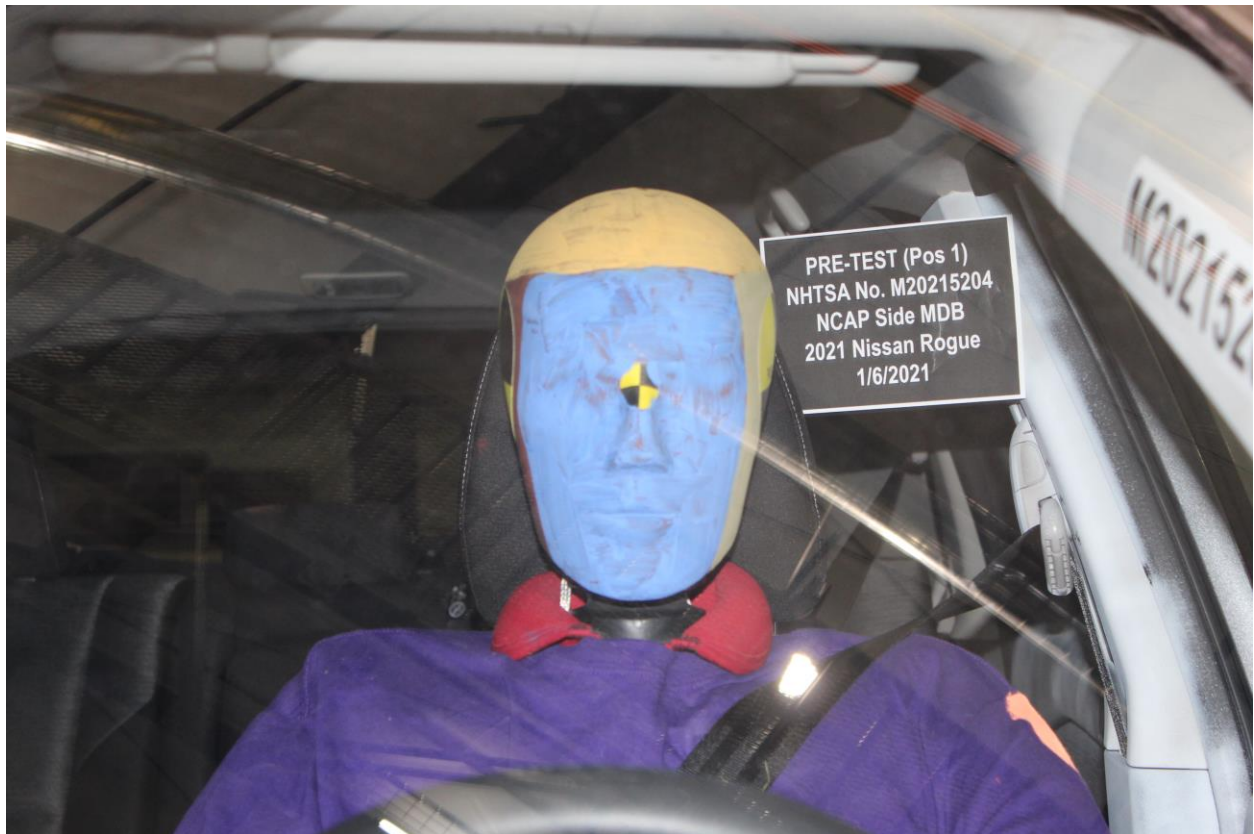

**Figure A-25: Pre-Test Front Close-up View of Driver Dummy**

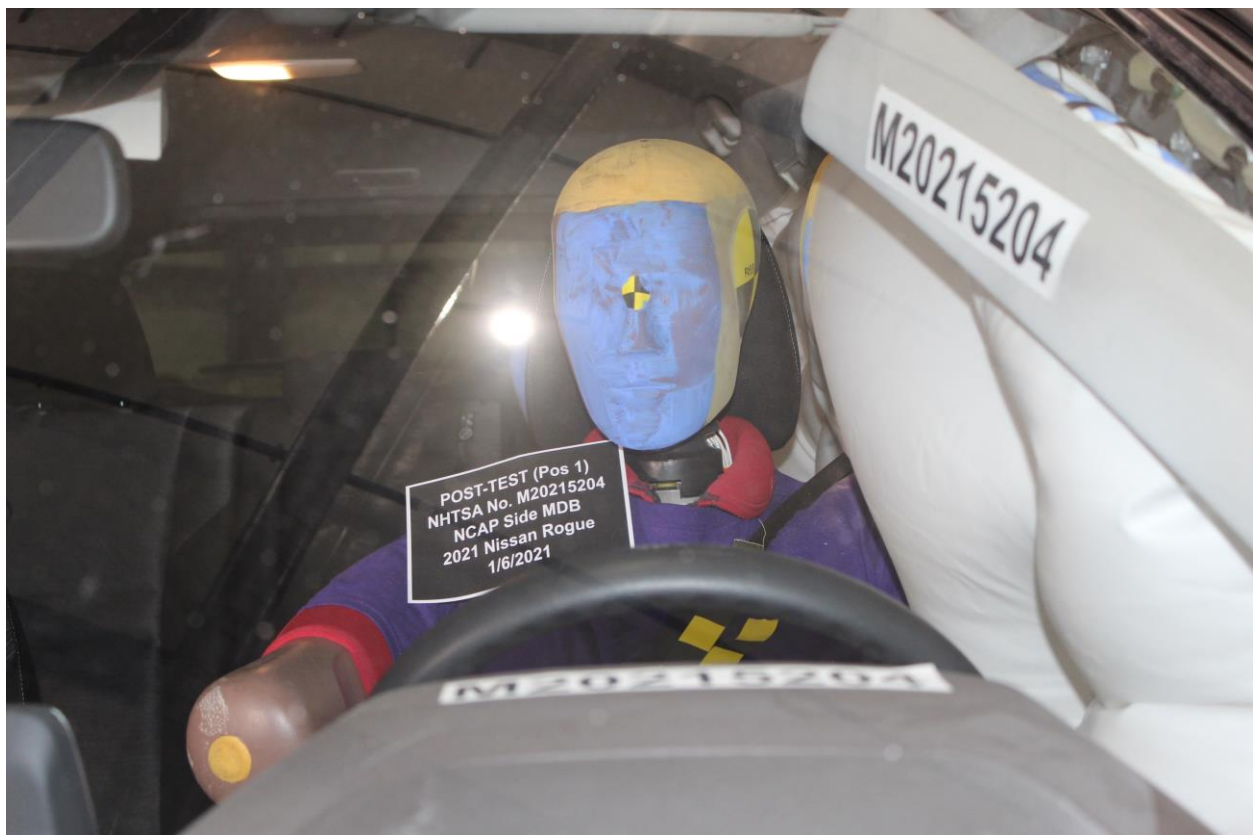

**Figure A-26: Post-Test Front Close-up View of Driver Dummy**



**Figure A-27: Pre-Test Left Side View of Driver Dummy Showing Belt and Chalking**



**Figure A-28: Pre-Test Left Side View of Driver Dummy Shoulder and Door Top View**



**Figure A-29: Post-Test Left Side View of Driver Dummy Shoulder and Door Top View**



**Figure A-30: Pre-Test Frontal View of Driver Seat Back Prior to Dummy Positioning**



**Figure A-31: Pre-Test Frontal View of Driver Dummy Head and Shoulders in Relation to Head Restraint**



**Figure A-32: Pre-Test Frontal View of Driver Seat Pan Prior to Dummy Positioning**



**Figure A-33: Pre-Test Overhead View of Driver Dummy Thighs on Seat Pan**



**Figure A-34: Pre-Test Placement of Driver Dummy's Feet**



**Figure A-35: Pre-Test View of Belt Anchorage for Driver Dummy**



**Figure A-36: Pre-Test Left Side View of Steering Wheel**



Figure A-37: View of Disengaged Parking Brake



Figure A-38: Pre-Test View of Parking Brake



Figure A-39: Pre-test Close-Up Left Side View of Driver Seat Track



Figure A-40: Pre-Test Close-Up Left Side View of Driver Seat Back



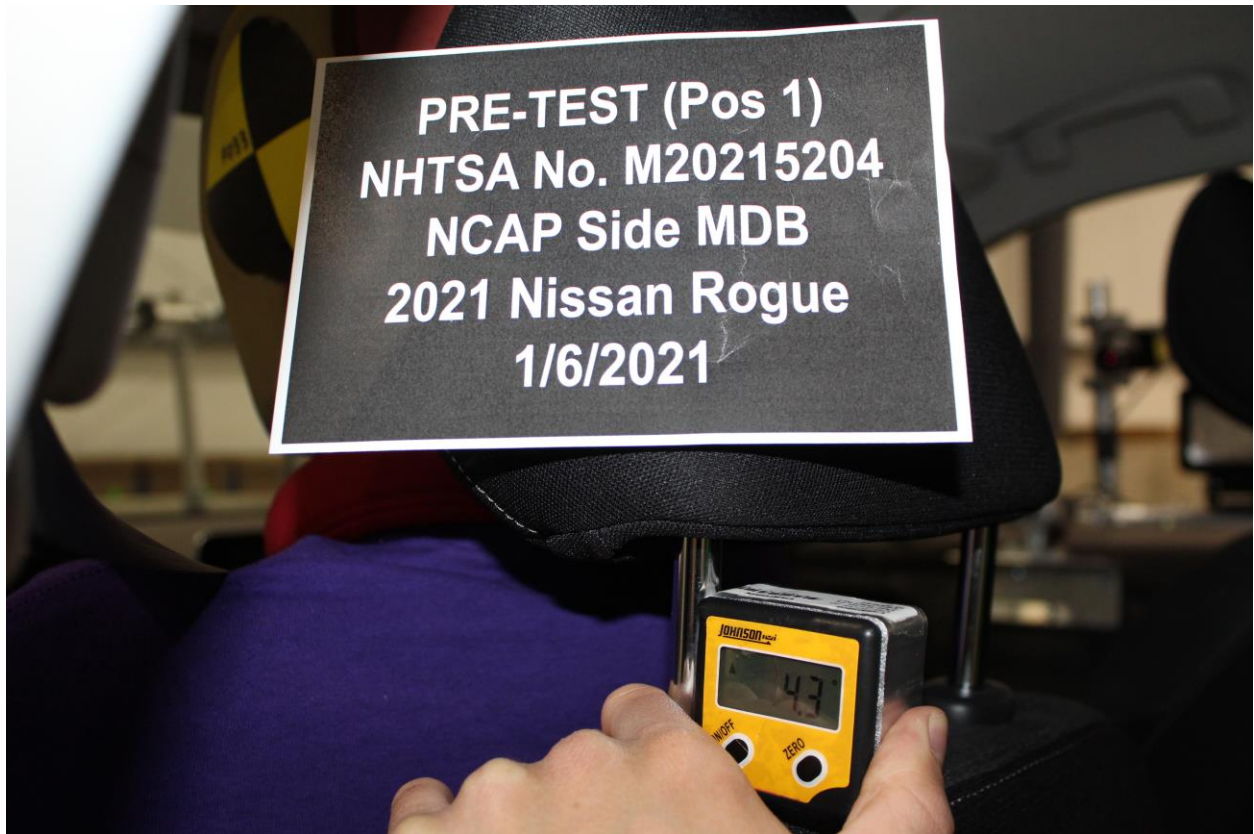


Figure A-41: Pre-Test Close-Up View of Driver Seat Back or Head Restraint



Figure A-42: Pre-Test Driver Dummy and Door Clearance View



**Figure A-43: Post-Test Driver Dummy and Door Clearance View**



**Figure A-44: Pre-Test Right Side View of Driver Dummy and Front Seat of Occupant Compartment**



**Figure A-45: Post-Test Right Side View of Driver Dummy and Front Seat of Occupant Compartment**



**Figure A-46: Pre-Test Driver Inner Door Panel View**



**Figure A-47: Post-Test Driver Inner Door Panel View Showing Driver Dummy Contact Locations**



**Figure A-48: Post-Test Driver Dummy Close-Up Head Contact with Vehicle View**



**Figure A-49: Post-Test Driver Dummy Close-Up Head Contact with Side Air bag View**




**Figure A-50: Post-Test Driver Dummy Close-Up Torso Contact with Vehicle Interior View**



**Figure A-51: Post-Test Driver Dummy Close-Up Torso Contact with Side Air bag View**



**Figure A-52: Post-Test Driver Dummy Close-Up Pelvis Contact View**

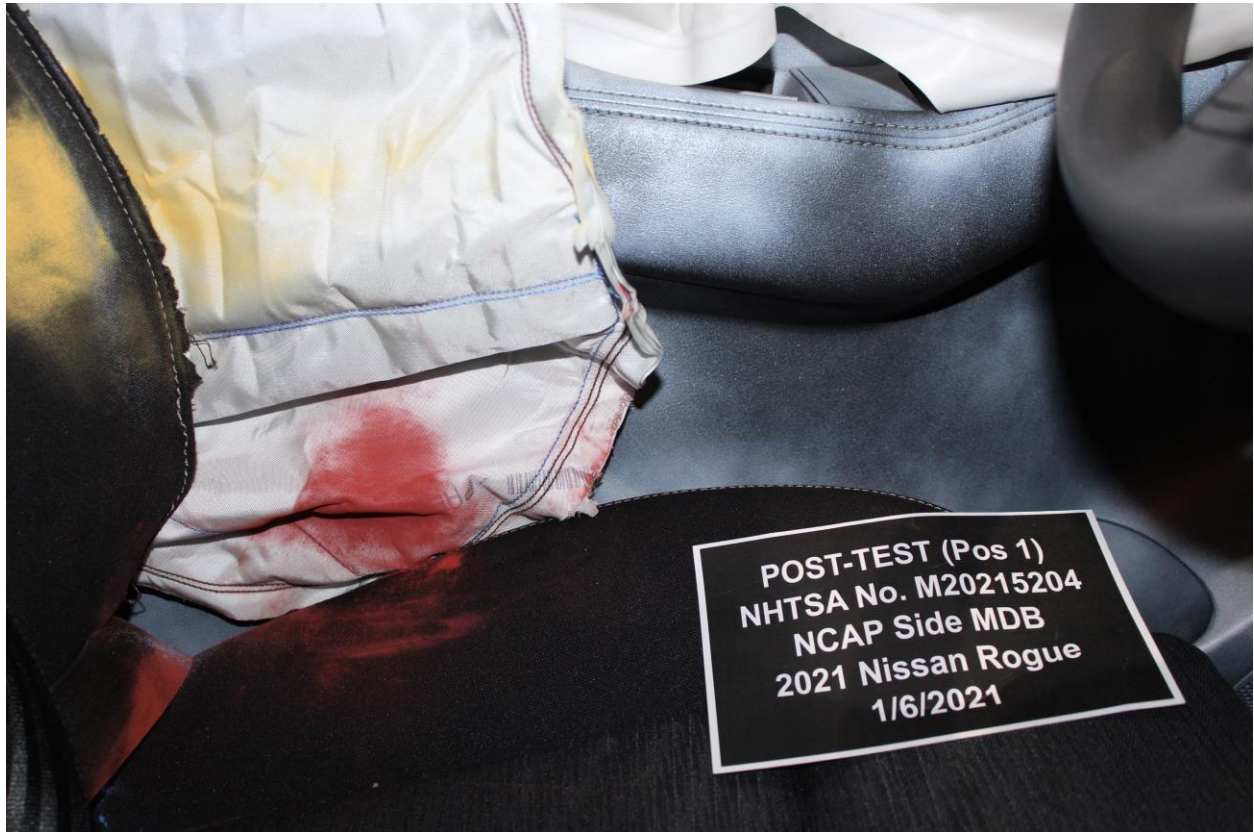

**Figure A-53: Post-Test Driver Dummy Close-Up Pelvis Contact with Side Air bag View**



**Figure A-54: Post-Test Driver Dummy Close-Up Knee Contact View**



**Figure A-55: Pre-Test Left Side View of Rear Passenger Dummy Showing Belt and Chalking**



**Figure A-56: Pre-Test Left Side View of Rear Passenger Dummy Shoulder and Door Top View**





**Figure A-57: Post-Test Left Side View of Rear Passenger Dummy Shoulder and Door Top View**



**Figure A-58: Pre-Test Frontal View of Rear Passenger Seat Back Prior to Dummy Positioning**




**Figure A-59: Pre-Test Frontal View of Rear Passenger Dummy Head and Shoulders in Relation to Head Restraint**



**Figure A-60: Pre-Test Overhead View of Rear Passenger Seat Pan Prior to Dummy Positioning**



**Figure A-61: Pre-Test Overhead View of Rear Passenger Dummy Thighs on Seat Pan**

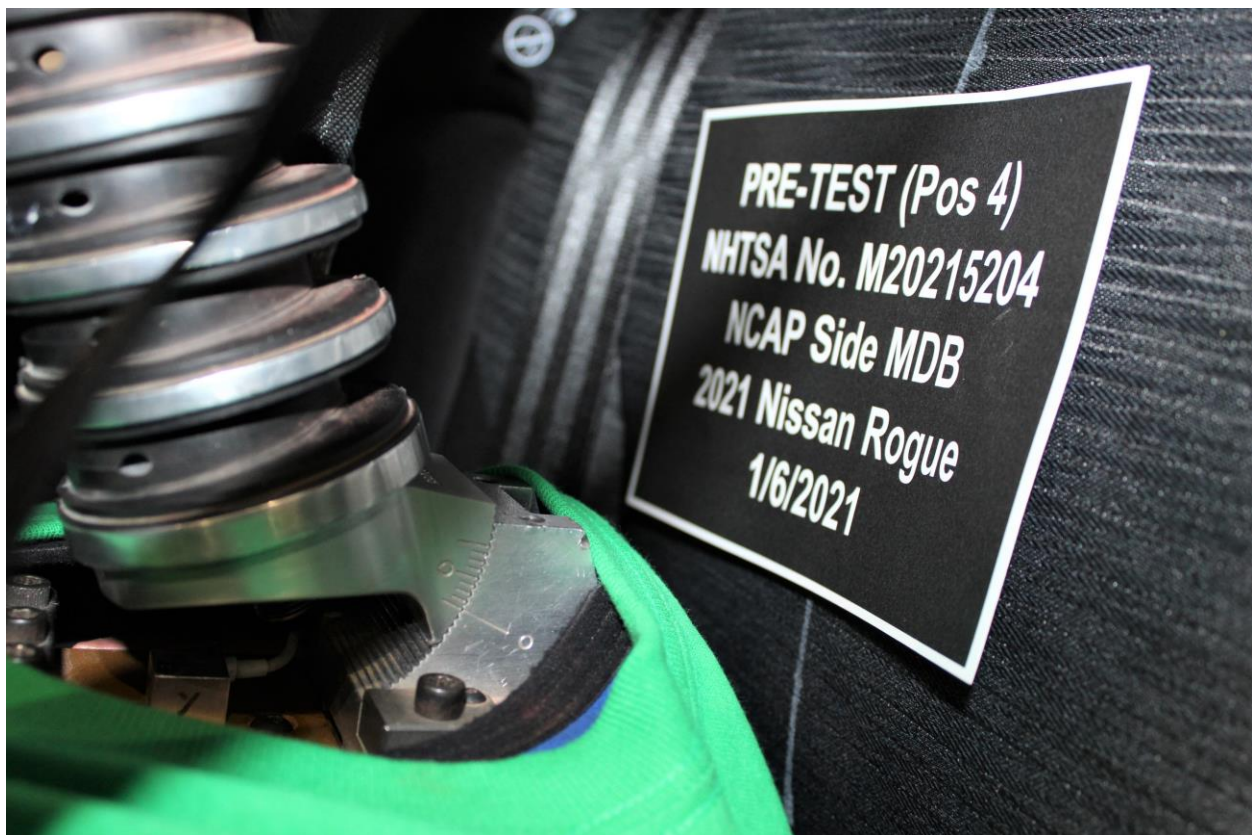

**Figure A-62: Pre-Test View of Rear Passenger Dummy's Neck Showing Position of Adjustable Neck Bracket**



**Figure A-63: Pre-Test View of Rear Passenger Dummy's Head Showing Dummy's Head is Level**



**Figure A-64: Pre-Test Placement of Rear Passenger Dummy's Feet**



**Figure A-65: Pre-Test View of Belt Anchorage for Rear Passenger Dummy**



**Figure A-66: Pre-Test Close-Up Left Side View of Rear Passenger Seat Track**



Figure A-67: Pre-Test Close-Up Left Side View of Rear Passenger Seat Back



Figure A-68: Pre-Test Close-Up View of Rear Passenger Seat Back or Head Restraint



**Figure A-69: Pre-Test Rear Passenger Dummy and Door Clearance View**



**Figure A-70: Post-Test Rear Passenger Dummy and Door Clearance View**



**Figure A-71: Pre-Test Right Side View of Rear Passenger Dummy and Rear Seat Occupant Compartment**



**Figure A-72: Post-Test Right Side View of Rear Passenger Dummy and Rear Seat Occupant Compartment**





**Figure A-73: Pre-Test Rear Passenger Inner Door Panel View**



**Figure A-74: Post-Test Rear Passenger Inner Door Panel View Showing Rear Passenger Dummy Contact Locations**



**Figure A-75: Post-Test Rear Passenger Dummy Close-Up Head Contact with Vehicle View**



**Figure A-76: Post-Test Rear Passenger Dummy Close-Up Head Contact with Side Air bag View**




**Figure A-77: Post-Test Rear Passenger Dummy Close-Up Torso Contact with Vehicle Interior View**



**Figure A-78: Post-Test Rear Passenger Dummy Close-Up Torso Contact with Side Air bag View**



**Figure A-79: Post-Test Rear Passenger Dummy Close-Up Pelvis Contact View**

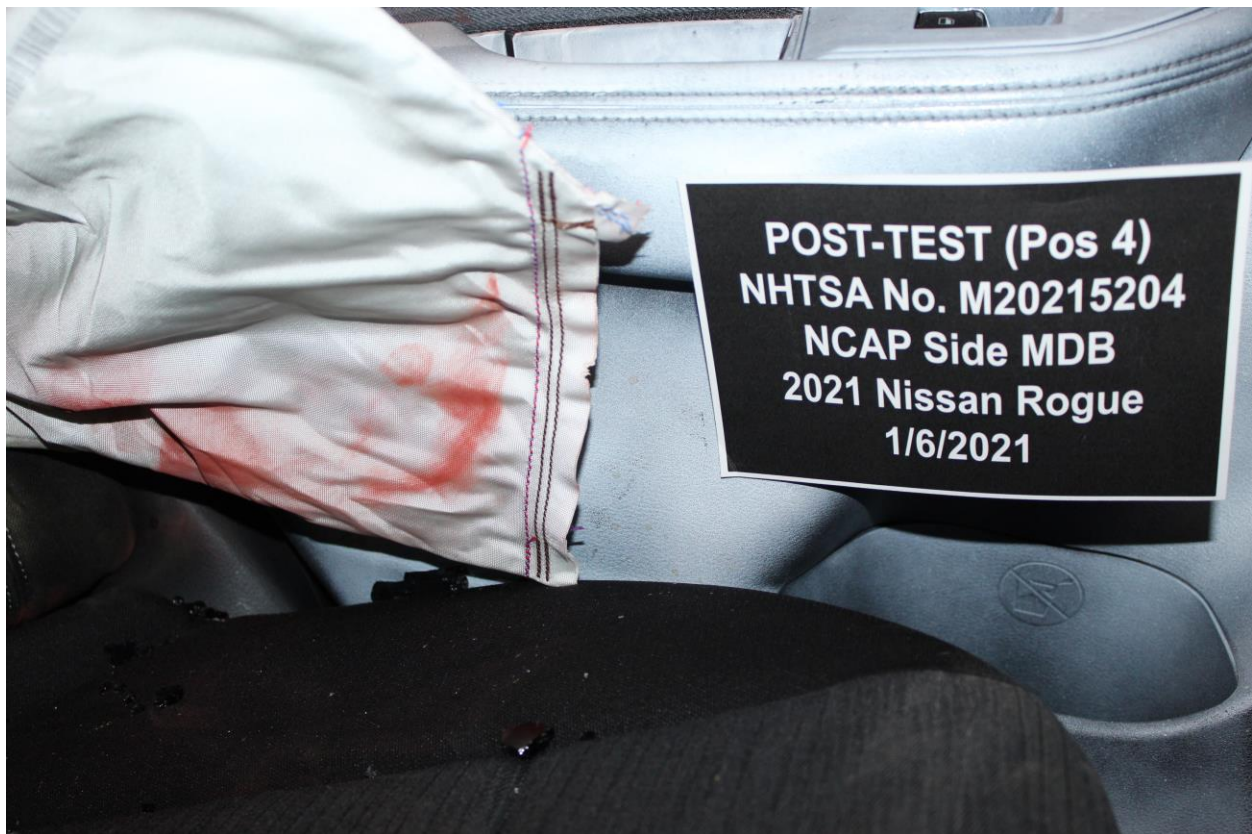

**Figure A-80: Post-Test Rear Passenger Dummy Close-Up Pelvis Contact with Side Air bag View**



**Figure A-81: Post-Test Rear Passenger Dummy Close-Up Knee Contact View**



**Figure A-82: Pre-Test View of Fuel Filler Cap or Fuel Filler Neck**



**Figure A-83: Post-Test View of Fuel Filler Cap or Fuel Filler Neck**



**Figure A-84: Pre-Test Front View of MDB Impactor Face**



**Figure A-85: Post-Test Front View of MDB Impactor Face**



**Figure A-86: Pre-Test Top View of MDB Impactor Face**



**Figure A-87: Post-Test Top View of MDB Impactor Face**



**Figure A-88: Pre-Test Left Side View of MDB Impactor Face**





**Figure A-89: Post-Test Left Side View of MDB Impactor Face**



**Figure A-90: Pre-Test Right Side View of MDB Impactor Face**



Figure A-91: Post-Test Right Side View of MDB Impactor Face

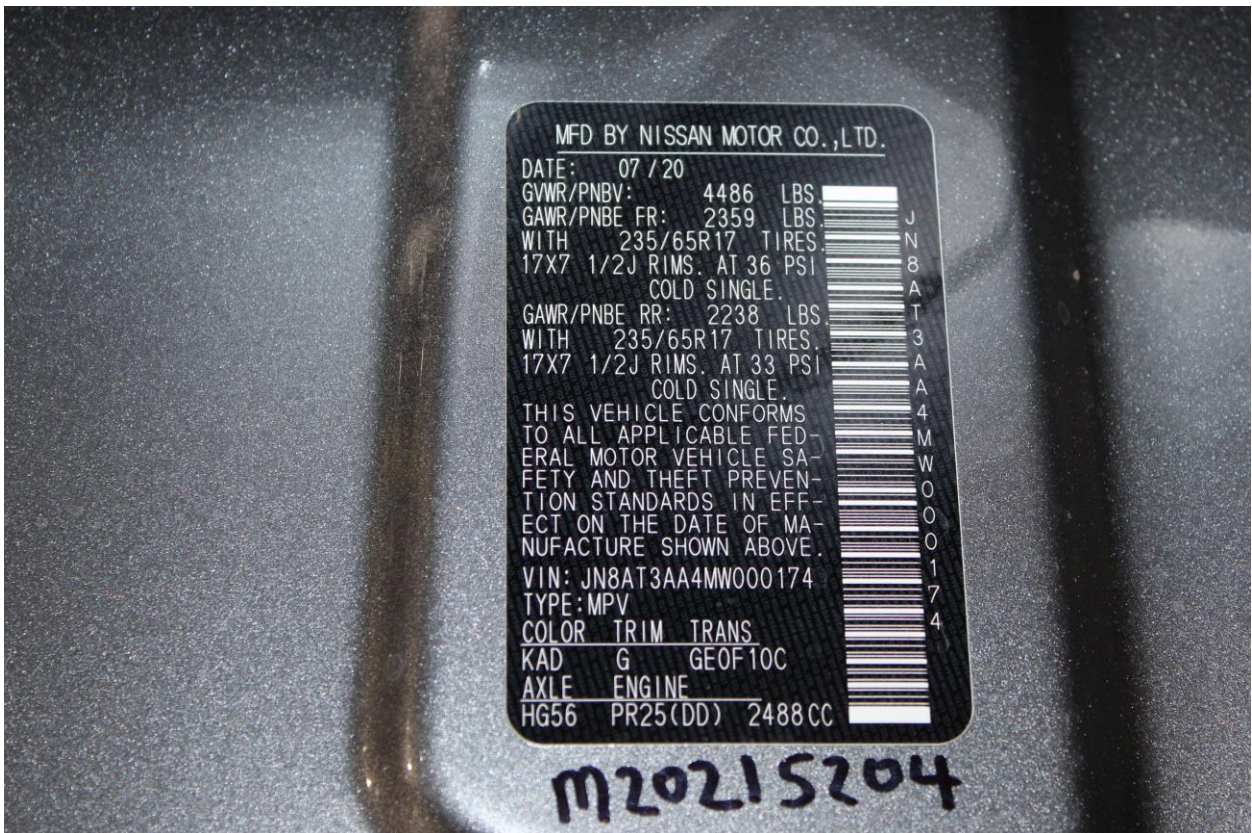


Figure A-92: Close-Up View of Vehicle's Certification Label

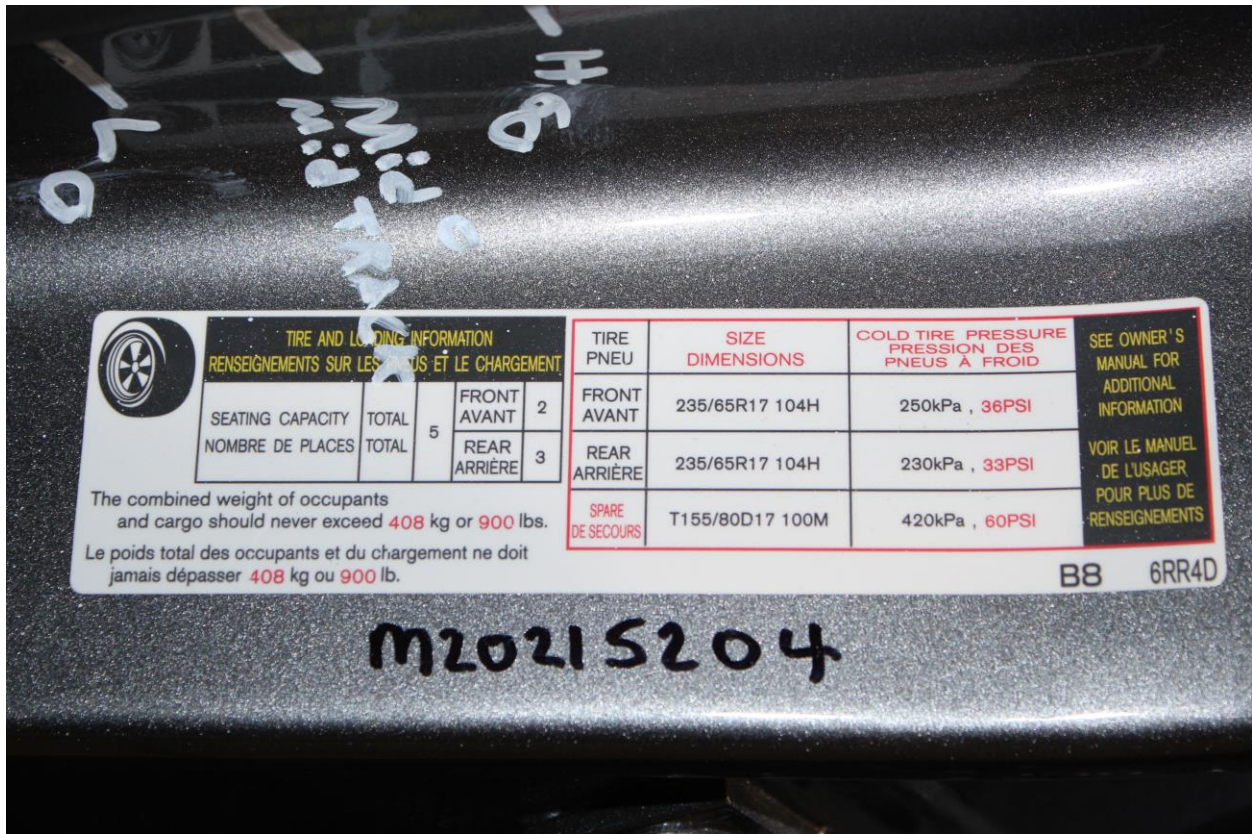


Figure A-93: Close-Up View of Vehicle's Tire Information Placard or Label

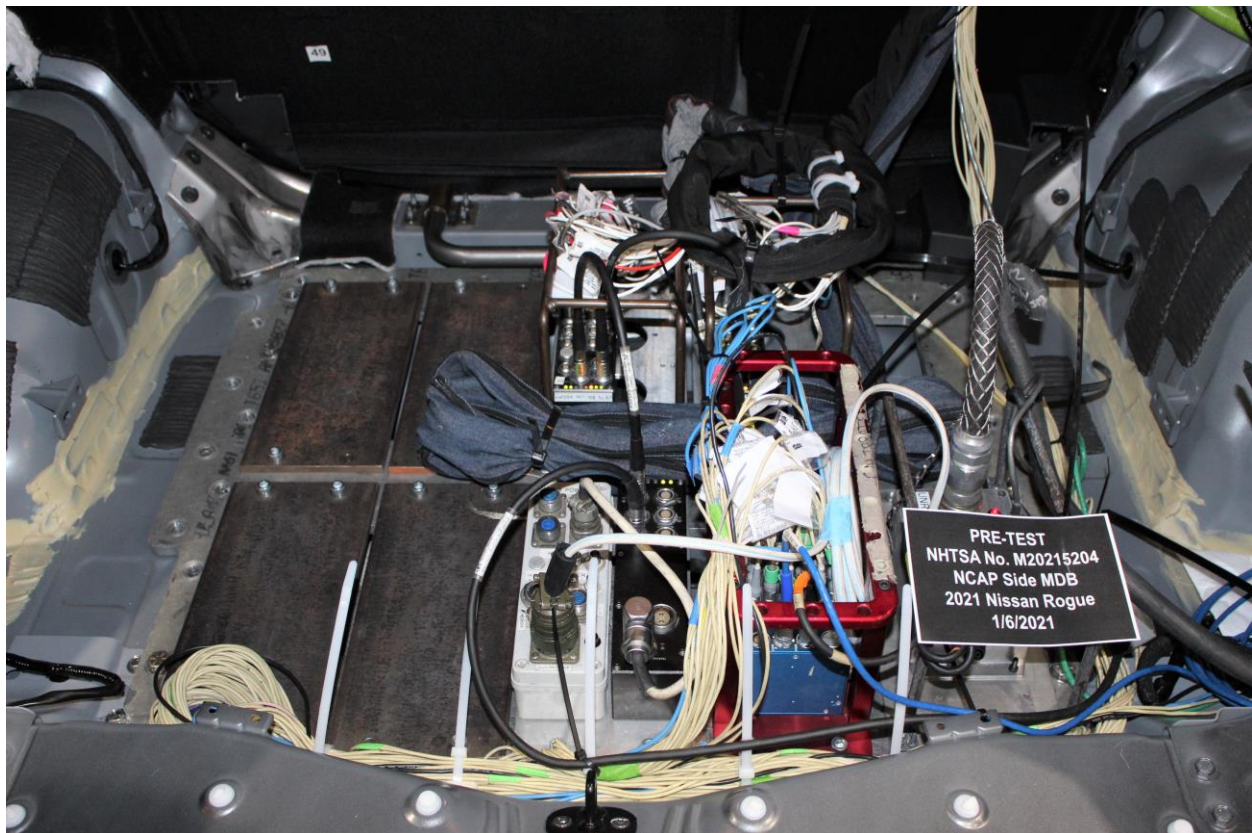


Figure A-94: Pre-Test Ballast View



**Figure A-95: Post-Test Primary and Redundant Speed Trap Read-Out**




**Figure A-96: FMVSS No. 301 Static Rollover 0 Degrees**



**Figure A-97: FMVSS No. 301 Static Rollover 90 Degrees**



**Figure A-98: FMVSS No. 301 Static Rollover 180 Degrees**

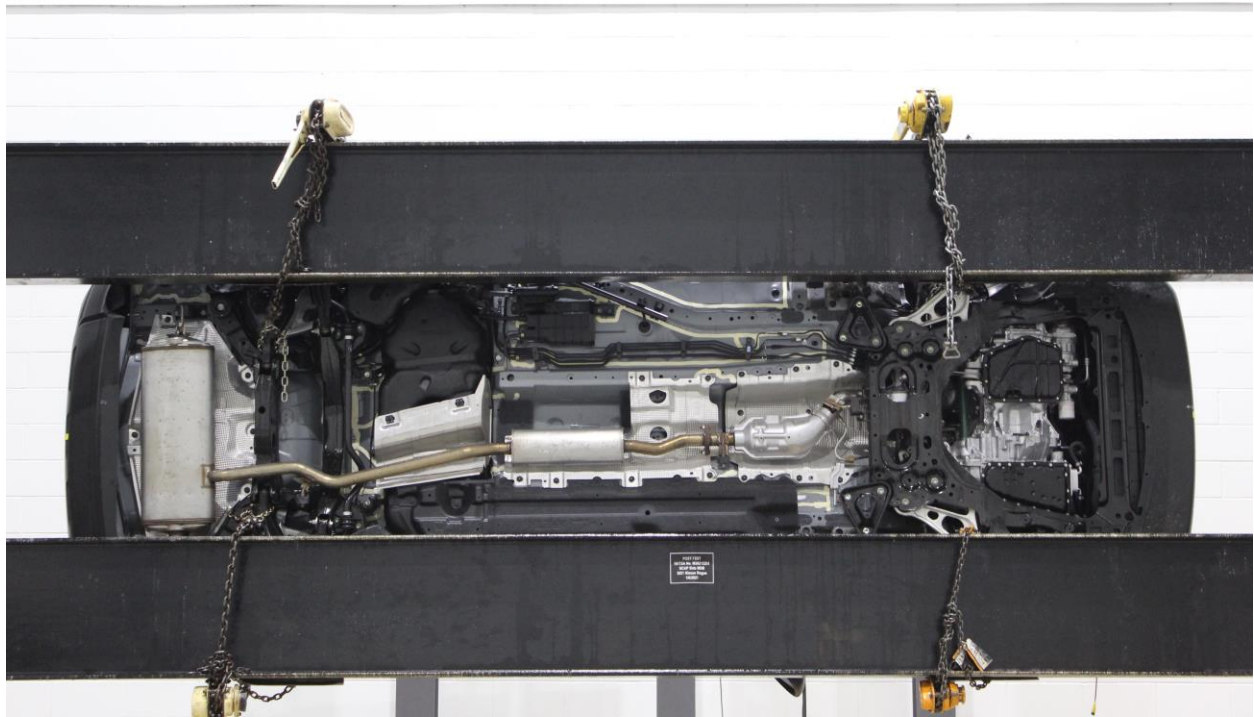


**Figure A-99: FMVSS No. 301 Static Rollover 270 Degrees**




**Figure A-100: FMVSS No. 301 Static Rollover 360 Degrees**



Figure A-101: Impact Event



**2021 NISSAN ROGUE**  
S FWD



Scan QR code for general model information & options

**EPA DOT Fuel Economy and Environment** Gasoline Vehicle

**Fuel Economy**  
30 MPG  
combined city/hwy  
27 city  
35 highway  
3.3 gallons per 100 miles

**You save \$750**  
in fuel costs over 5 years compared to the average new vehicle.

---

**Standard Equipment Included at No Extra Charge**

**MECHANICAL & PERFORMANCE**  
2.5L DOHC 16-Valve 4-Cylinder Engine  
181 hp, 181 lb-ft torque  
XTRONIC CVT  
Manual Mode with Paddle Shifters  
Electronic Parking Brake with Auto-hold  
Front and Rear Disc Brakes  
17" Alloy Wheels  
Temporary Spare Tire  
Front Independent Suspension  
Rear Multi-link Suspension  
Drive Mode Selector

**SAFETY & SECURITY**  
Nissan Advanced Air Bag System (AABS)  
Front & Rear-outboard Seat-mounted Side-impact & Roof-mounted Curtain Supplemental Air Bags  
Driver and Front Passenger Knee Air Bags  
Lower Anchors and Tethers for Children (LATCH)  
Brake Assist (BA)  
Automatic Emergency Braking (AEB) with Pedestrian Detection  
Blind Spot Warning (BSW)  
Rear Cross Traffic Alert (RCTA)  
Lane Departure Warning (LDW)  
High Beam Assist (HBA)  
Rear Automatic Braking (RAB)  
Intelligent Forward Collision Warning (IFCW)

**COMFORT & CONVENIENCE**  
6-way Manual Driver Seat  
60/40 Split Folding & Reclining 2nd-row Seat  
NissanConnect®  
Apple CarPlay®  
Android Auto™  
SiriusXM® Radio  
8" Color Touch-screen Display  
Power Windows with Driver Auto-up/down  
2nd-row Seat Air Vents  
Nissan Intelligent Key® with Push Button Ignition  
Cruise Control  
Rear Sonar System  
Rear Door Alert  
Voice Recognition

**EXTERIOR**  
Intelligent Auto Headlights  
LED Low and High Beam Headlights  
LED Daytime Running Lights  
LED Tail Lamps  
Rear Spoiler  
Rear Privacy Glass

†For more information, see dealer, owner's manual, or [www.nissanusa.com/connected360](http://www.nissanusa.com/connected360)  
\*\*Optional Equipment Replaces Standard Where Applicable

**Manufacturer's Suggested Retail Base Price:** \$25,650.00

**Options Included by Manufacturer**  
Splash Guards 180.00  
Chrome Rear Bumper Protector 170.00  
Floor Mats, 1-piece Cargo Area Protector, Seatback Protector and First Aid Kit 385.00

**DESTINATION CHARGES** 1,095.00

**Total\*** \$27,480.00

---

**Annual fuel cost \$1,350**

**Fuel Economy & Greenhouse Gas Rating** (tailpipe only) Smog Rating (tailpipe only)

1 6 10 1 7 10  
Best

**Actual results will vary for many reasons, including driving conditions and how you drive and maintain your vehicle. The average new vehicle gets 27 MPG and costs \$7,500 to fuel over 5 years. Cost estimates are based on 18,000 miles per year at \$2.70 per gallon. MPG is miles per gallon city equivalent. Vehicle emissions are a significant cause of climate change and smog.**

**GOVERNMENT 5-STAR SAFETY RATINGS**

**Overall Vehicle Score Not Rated**  
Based on the combined ratings of frontal, side and rollover. Should ONLY be compared to other vehicles of similar size and weight.

Frontal Crash	Driver	Not Rated
	Passenger	Not Rated

Based on the risk of injury in a frontal impact. Should ONLY be compared to other vehicles of similar size and weight.

Side Crash	Front seat	Not Rated
	Rear seat	Not Rated

Based on the risk of injury in a side impact.

**Rollover Not Rated**  
Based on the risk of rollover in a single-vehicle crash.

Star ratings range from 1 to 5 stars (\*\*\*\*\* with 5 being the highest).  
Source: National Highway Traffic Safety Administration (NHTSA)  
[www.safercar.gov](http://www.safercar.gov) or 1-888-327-4236

**DELIVERY**

**VEHICLE COLORS:**  
EXT: GUN METALLIC  
INT: CHARCOAL

**FINAL ASSEMBLY POINT:**  
LOS ANGELES

**TRANSPORT METHOD:**  
TRUCK


**DEALER:**  
JEFF WYLER NISSAN/CINCINNATI  
8680 COLERAIN AVE  
CINCINNATI OH 45251

**VIN:** JNBAT3AA4M000174  
**EMS:** 50 STATE EMISSIONS  
**MDL:** 2211-000174 KAD-G  
**OPT:** A-992993L8C03

2020101222329A/55569


\*Does not include dealer installed options and accessories, local taxes or license fees. This label has been applied pursuant to federal law. Do not remove prior to delivery to the ultimate purchaser.

Figure A-102: Monroney Label

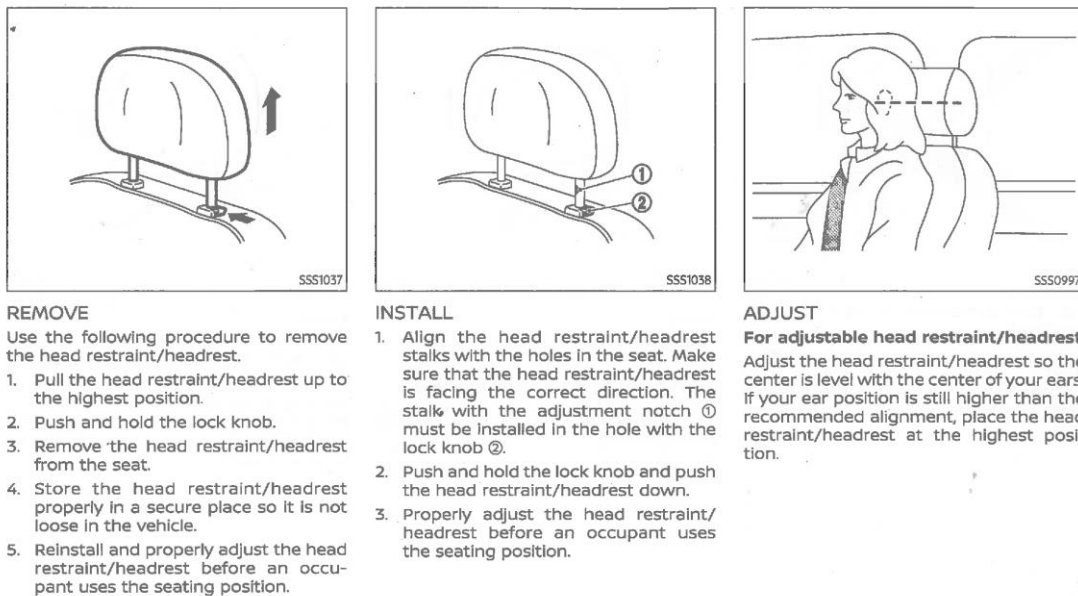

Safety — Seats, seat belts and supplemental restraint system 1-11

**Figure A-103: Driver Head Restraint Use and Adjustment Information from Vehicle Owner's Manual**

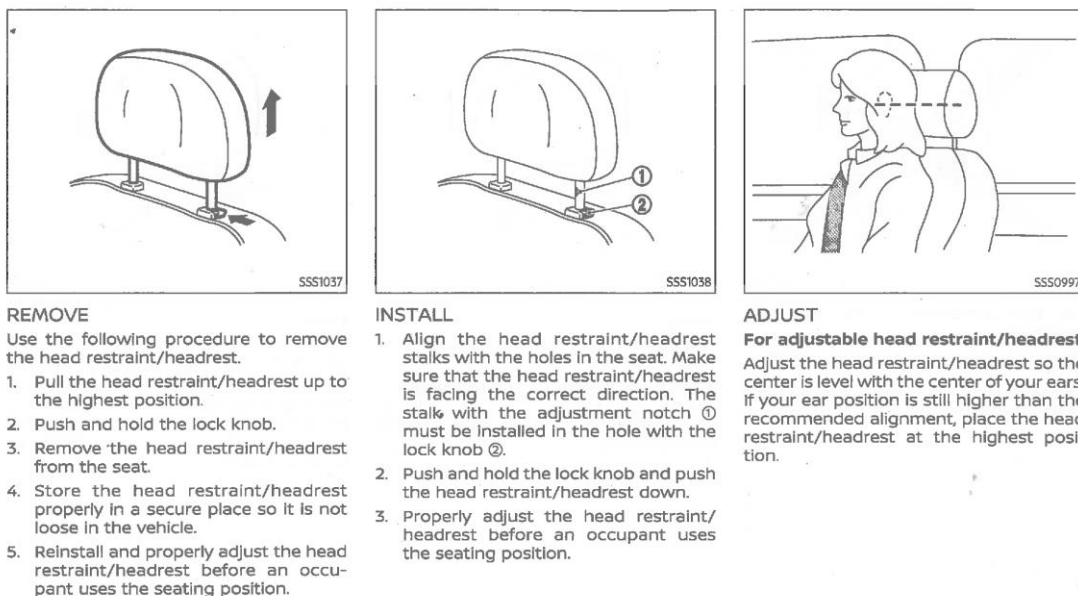

Safety — Seats, seat belts and supplemental restraint system 1-11

**Figure A-104: Left Rear Passenger Head Restraint Use and Adjustment Information from Vehicle Owner's Manual-Rear Restraints Not Adjustable**



## **APPENDIX B**

### VEHICLE AND DUMMY RESPONSE DATA PLOTS

## TABLE OF DATA PLOTS

### Driver & Passenger Dummy Instrumentation Plots

<b>Fig.</b>	<b>Description</b>	<b>Page</b>
1	Driver Head Acceleration (X) Primary vs. Time	B-5
2	Driver Head Acceleration (Y) Primary vs. Time	B-5
3	Driver Head Acceleration (Z) Primary vs. Time	B-5
4	Driver Head Resultant Acceleration Primary vs. Time	B-5
5	Driver Upper Thorax Rib Deflection (Y) vs. Time	B-6
6	Driver Middle Thorax Rib Deflection (Y) vs. Time	B-6
7	Driver Lower Thorax Rib Deflection (Y) vs. Time	B-6
8	Driver Thorax Rib Deflection Maximum vs. Time	B-6
9	Driver Anterior Abdominal Force (Y) vs. Time	B-7
10	Driver Middle Abdominal Force (Y) vs. Time	B-7
11	Driver Posterior Abdominal Force (Y) vs. Time	B-7
12	Driver Total Abdominal Force (Y) vs. Time	B-7
13	Driver Pubic Symphysis Force (Y) vs. Time	B-8
14	Passenger Head Acceleration (X) vs. Time Primary	B-8
15	Passenger Head Acceleration (Y) vs. Time Primary	B-8
16	Passenger Head Acceleration (Z) vs. Time Primary	B-8
17	Passenger Head Resultant Acceleration Primary vs. Time	B-9
18	Passenger Lower Spine T12 Acceleration (X) vs. Time	B-9
19	Passenger Lower Spine T12 Acceleration (Y) vs. Time	B-9
20	Passenger Lower Spine T12 Acceleration (Z) vs. Time	B-9
21	Passenger Lower Spine T12 Resultant Acceleration vs. Time	B-10
22	Passenger Iliac Force on Impact Side (Y) vs. Time	B-10
23	Passenger Acetabulum Force on Impact Side (Y) vs. Time	B-10
24	Passenger Total Pelvic Force on Impact Side (Y) vs. Time	B-10

The following additional data for this test can be obtained from the Research and Development section of the NHTSA website. The website can be found at [www.NHTSA.gov](http://www.NHTSA.gov).

#### **Additional Driver & Passenger Dummy Instrumentation Data**





Driver Lower Spine T12 Acceleration (X)  
Driver Lower Spine T12 Acceleration (Y)  
Driver Lower Spine T12 Acceleration (Z)  
Passenger Upper Thorax Rib Deflection (Y)  
Passenger Middle Thorax Rib Deflection (Y)  
Passenger Lower Thorax Rib Deflection (Y)  
Passenger Upper Abdomen Rib Deflection (Y)  
Passenger Lower Abdomen Rib Deflection (Y)  
Driver Head Acceleration Redundant (X)  
Driver Head Acceleration Redundant (Y)  
Driver Head Acceleration Redundant (Z)  
Passenger Head Acceleration Redundant (X)  
Passenger Head Acceleration Redundant (Y)  
Passenger Head Acceleration Redundant (Z)





#### **Vehicle Instrumentation Data**





Vehicle Center of Gravity Acceleration (X)  
Vehicle Center of Gravity Acceleration (Y)  
Vehicle Center of Gravity Acceleration (Z)  
Right Side Sill at Front Seat Acceleration (X)  
Right Side Sill at Front Seat Acceleration (Y)  
Right Side Sill at Front Seat Acceleration (Z)  
Right Side Sill at Rear Seat Acceleration (X)  
Right Side Sill at Rear Seat Acceleration (Y)  
Right Side Sill at Rear Seat Acceleration (Z)  
Left Side Sill at Front Seat Acceleration (Y)  
Left Side Sill at Rear Seat Acceleration (Y)  
Lower A-Post Acceleration (Y)  
Middle A-Post Acceleration (Y)  
Lower B-Post Acceleration (Y)  
Middle B-Post Acceleration (Y)  
Front Seat Track Acceleration (Y)  
Rear Seat Structure Acceleration (Y)  
Right Rear Occupant Compartment Acceleration (Y)  
Engine Block (X)  
Engine Block (Y)  
Rear Floorpan Above Axle Acceleration (X)  
Rear Floorpan Above Axle Acceleration (Y)  
Rear Floorpan Above Axle Acceleration (Z)





## **MDB Instrumentation Data**

MDB Center of Gravity Acceleration (X)  
MDB Center of Gravity Acceleration (Y)  
MDB Center of Gravity Acceleration (Z)  
MDB Rear Acceleration (X)  
MDB Rear Acceleration (Y)  
Left MDB Contact Switch  
Right MDB Contact Switch

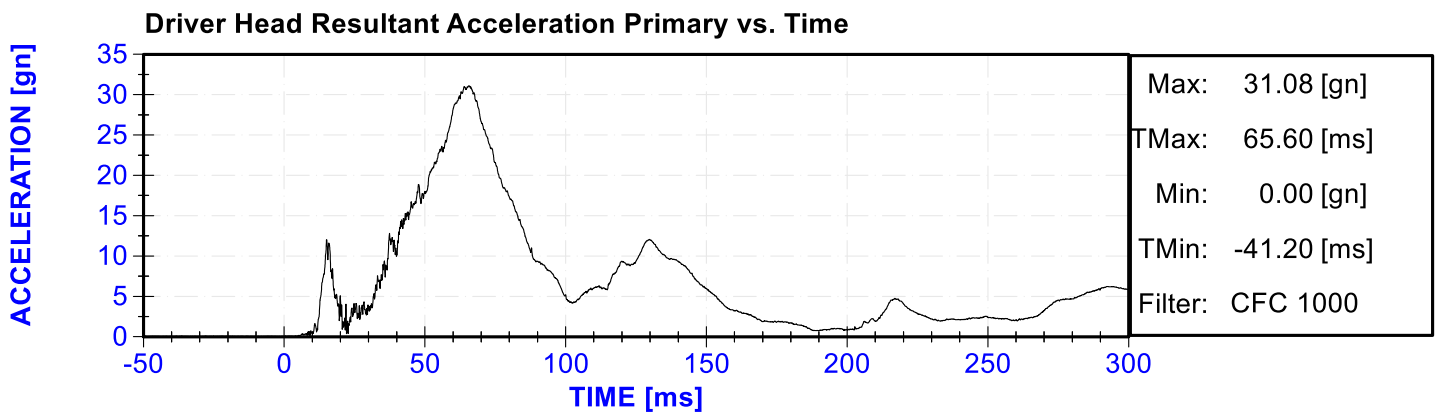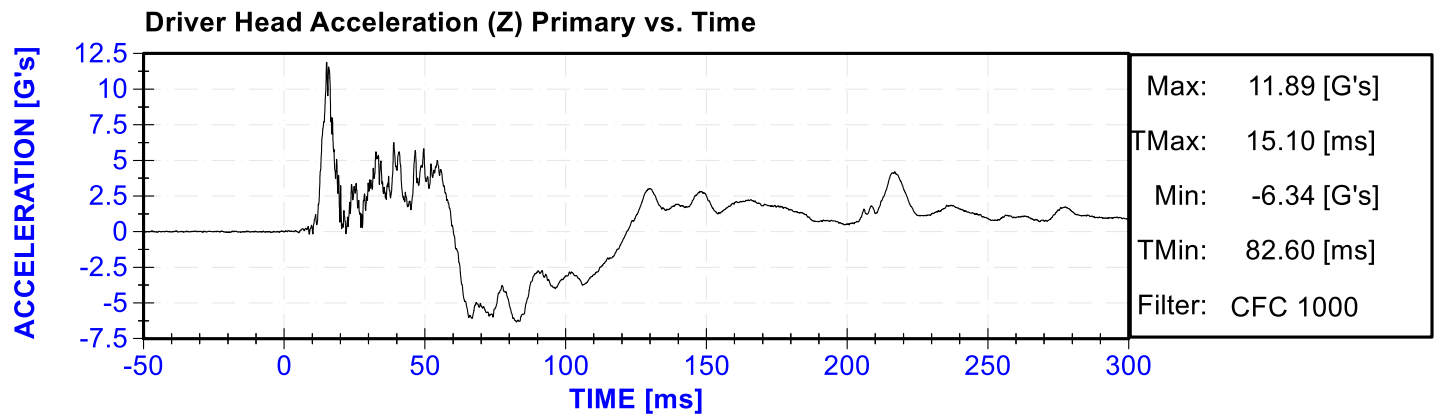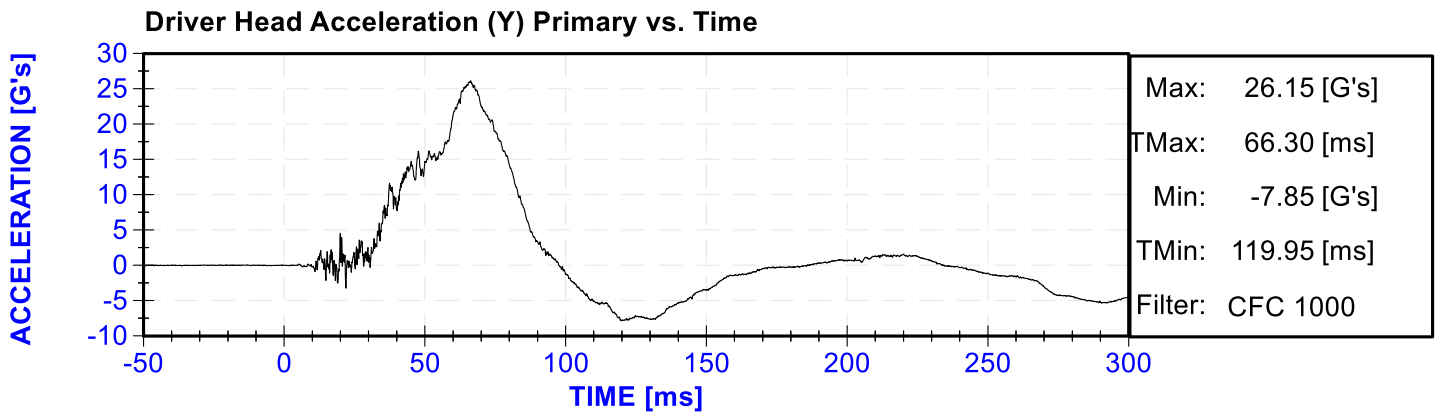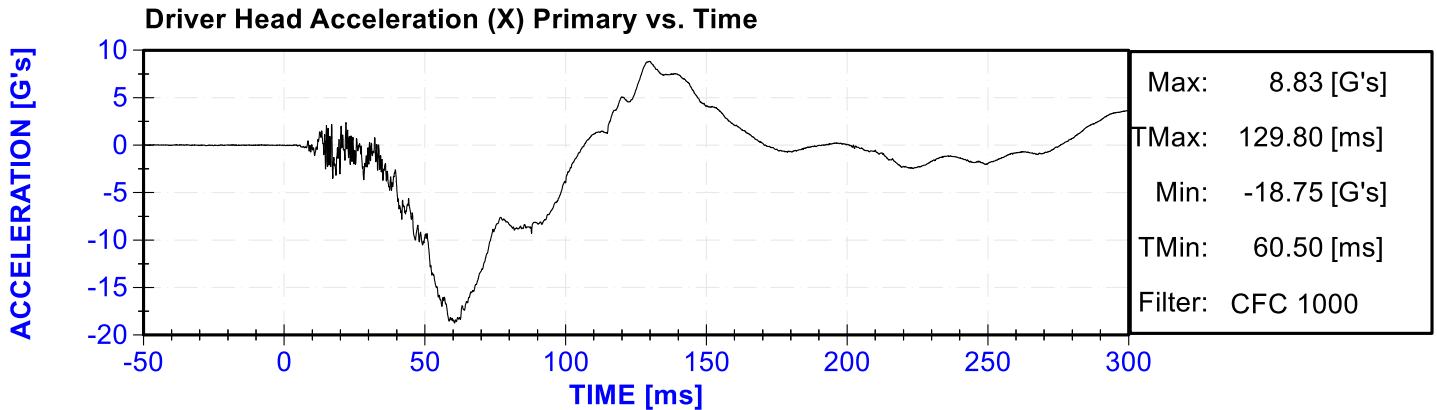

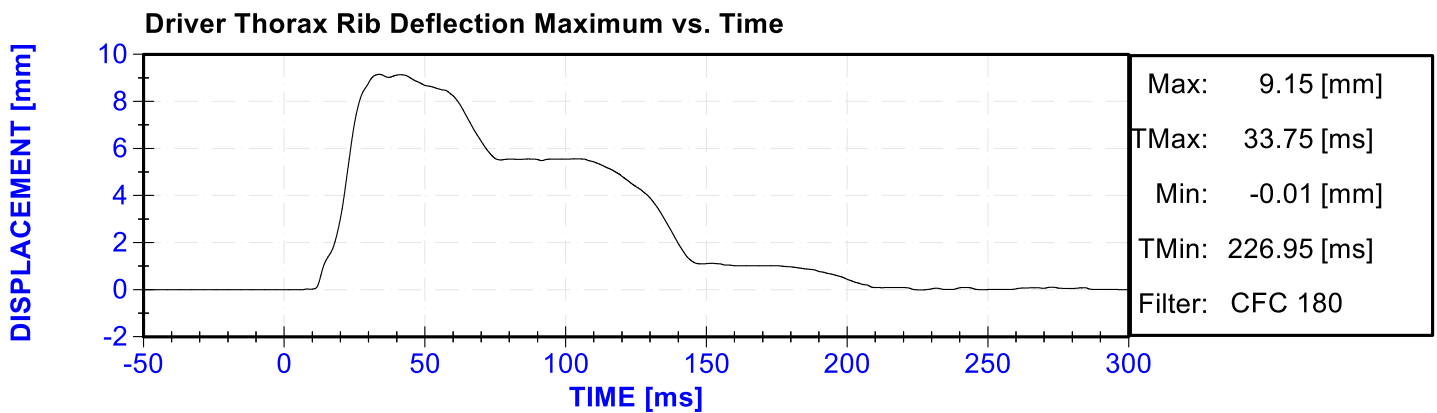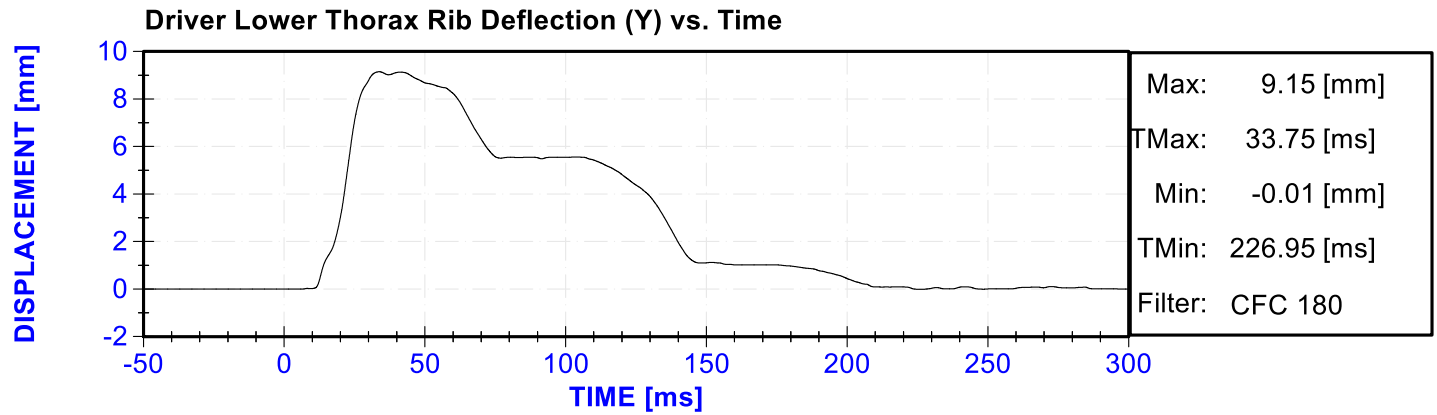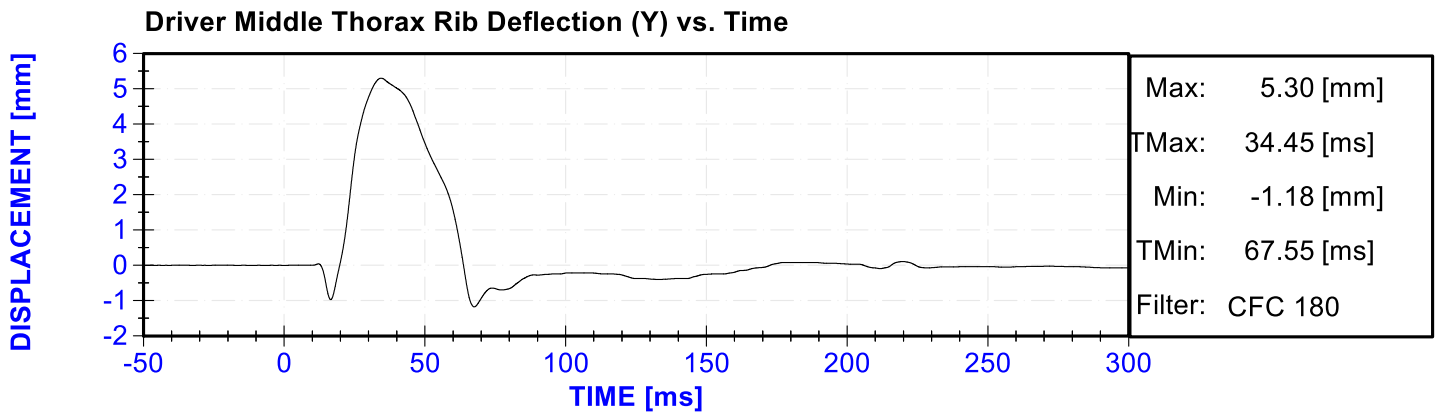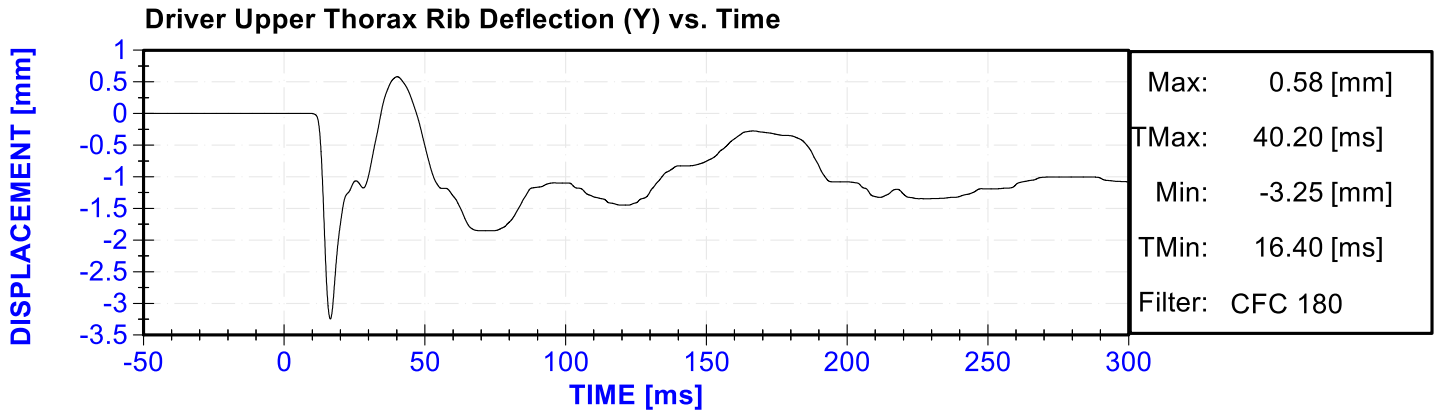


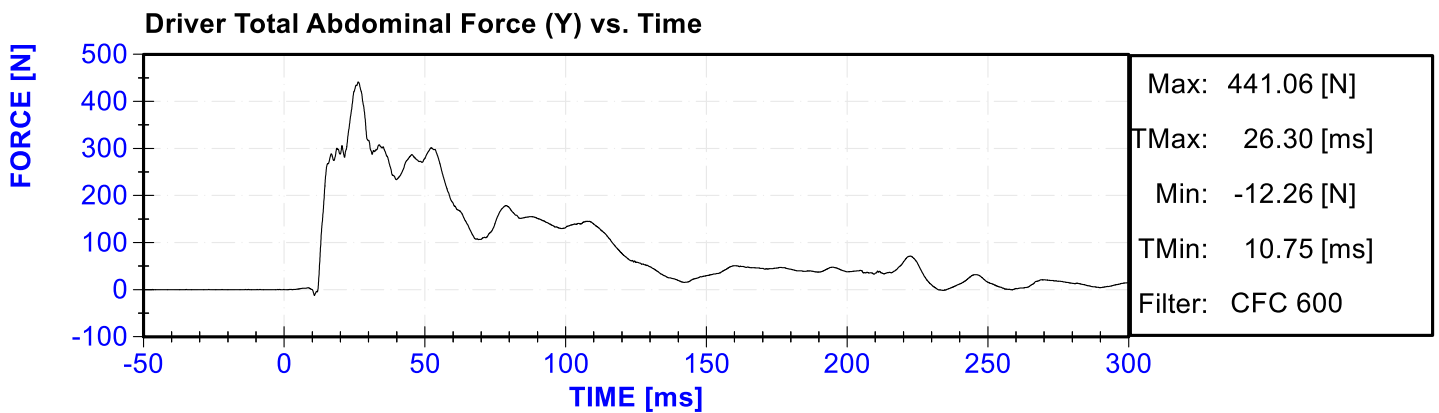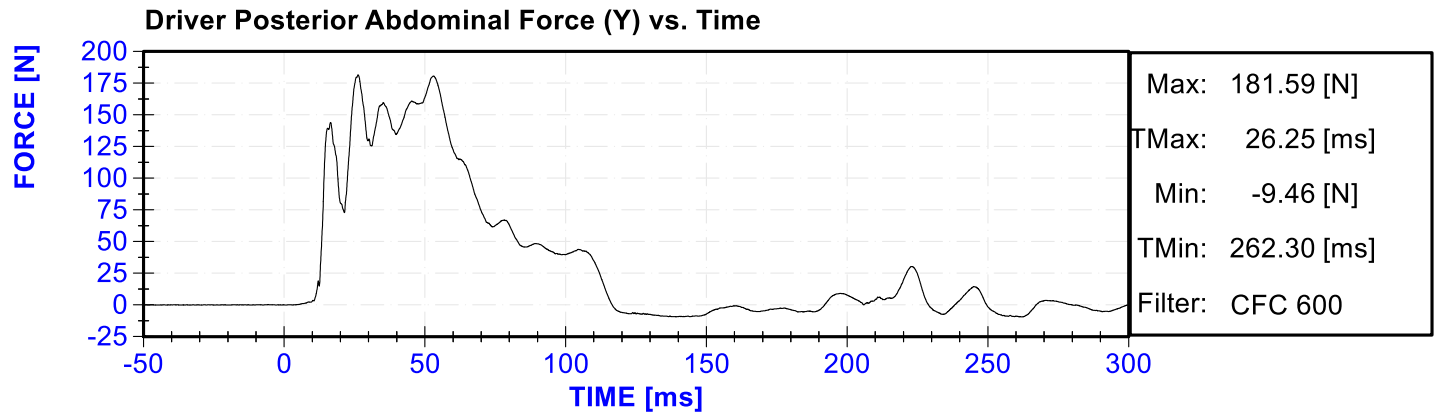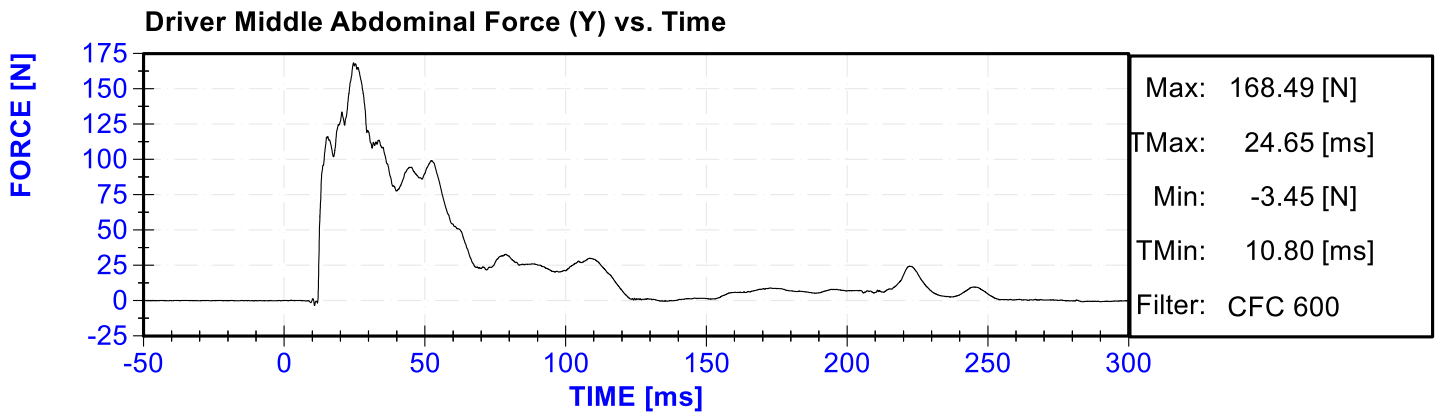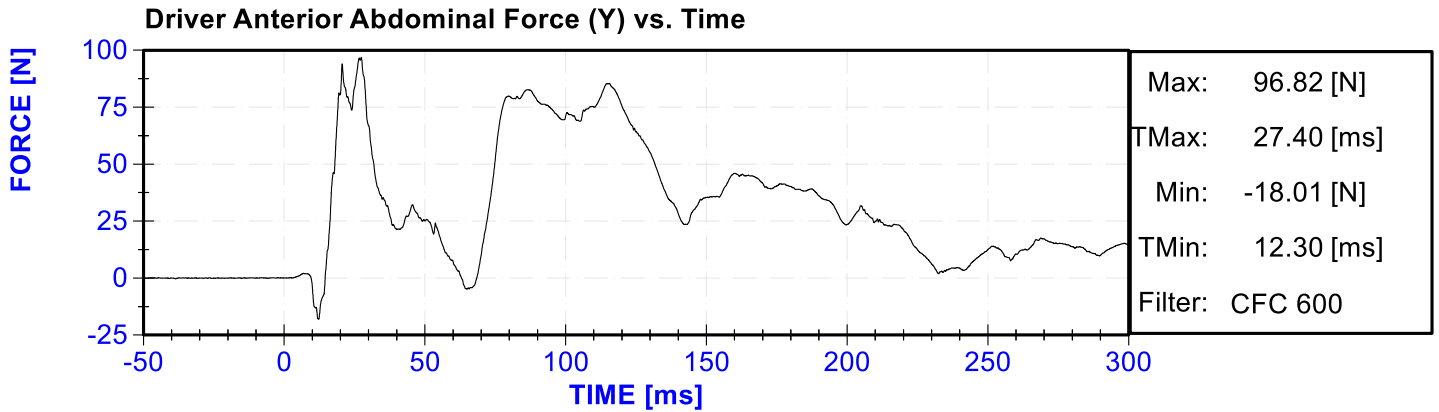

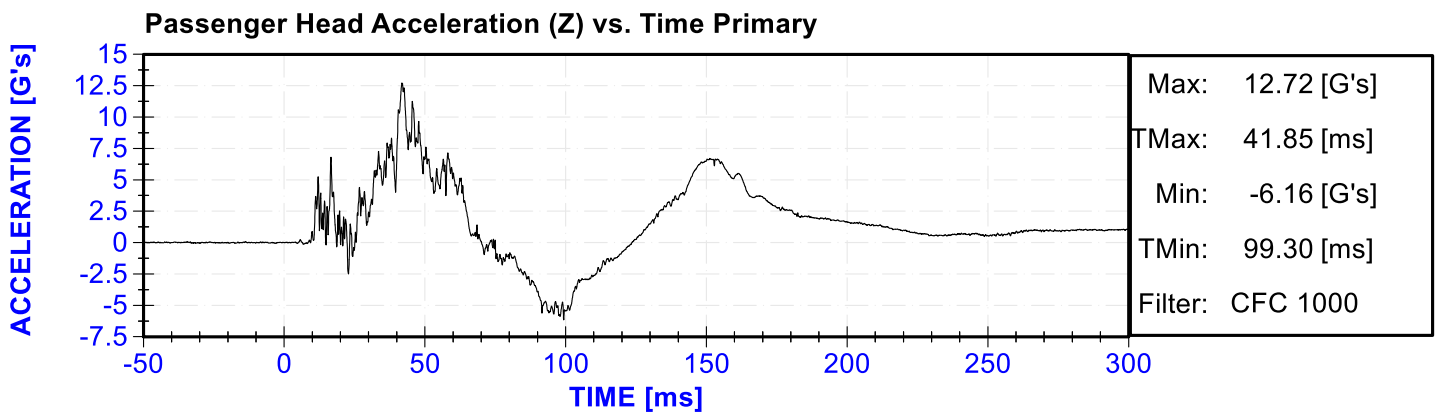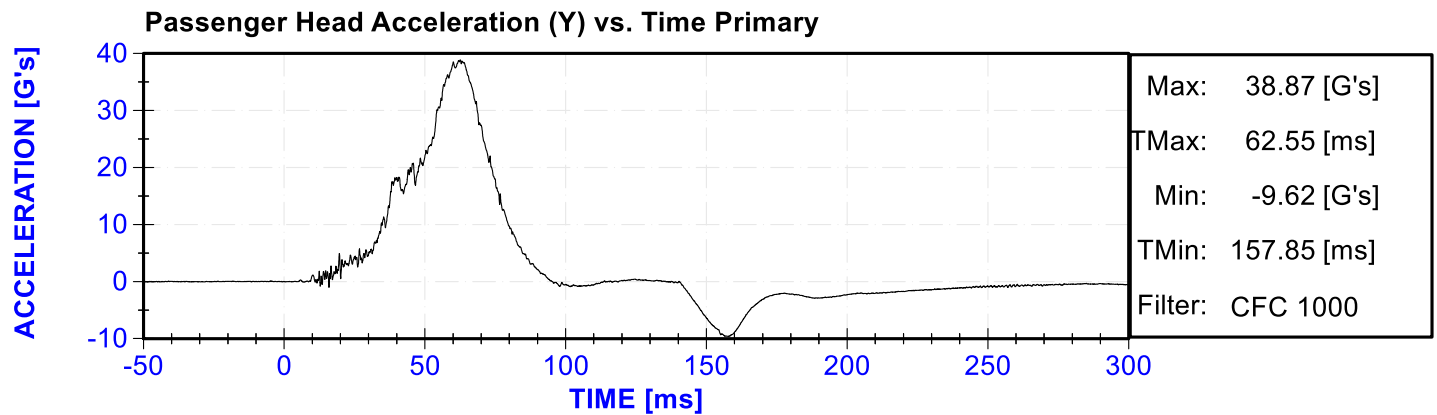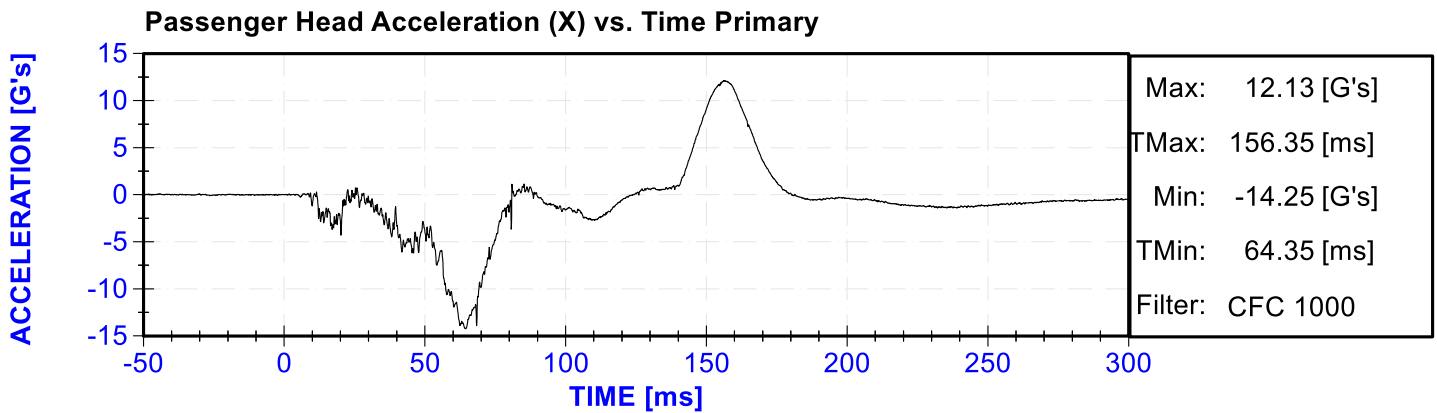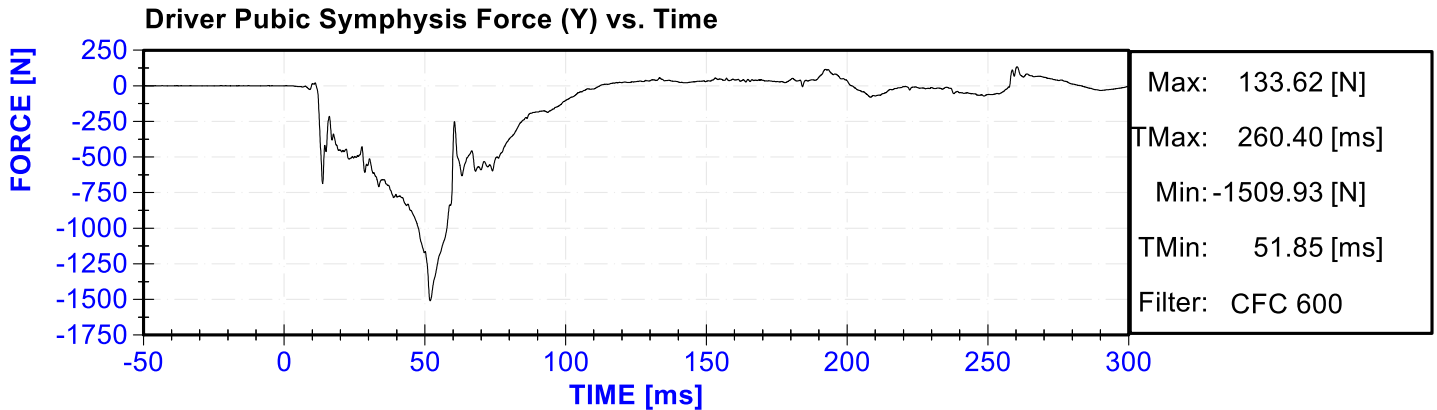





Passenger Head Resultant Acceleration Primary vs. Time

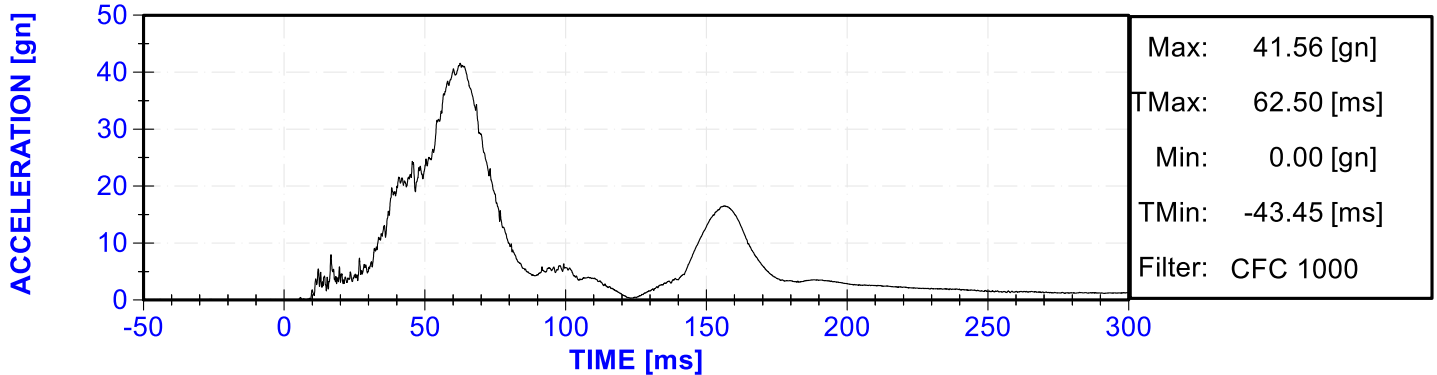


Passenger Lower Spine T12 Acceleration (X) vs. Time




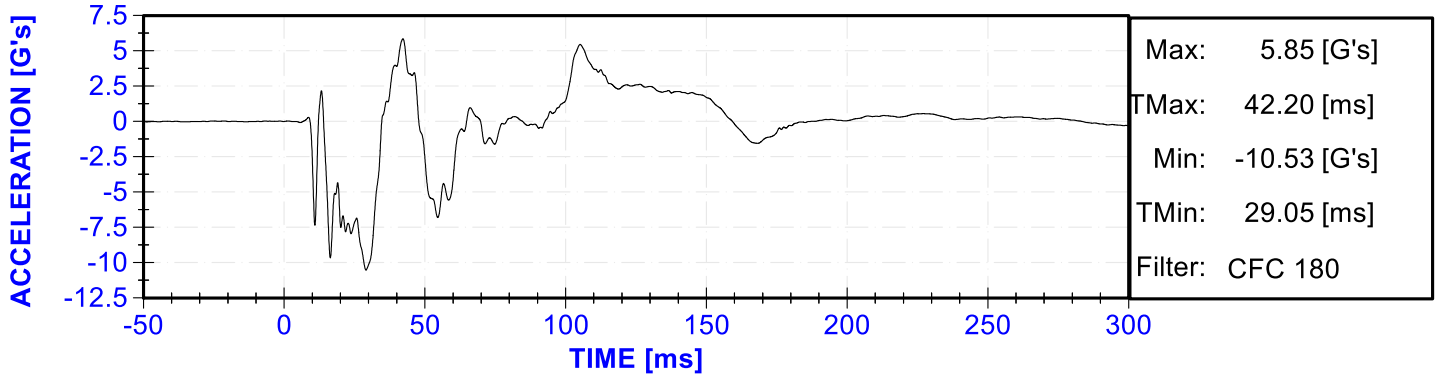


Passenger Lower Spine T12 Acceleration (Y) vs. Time

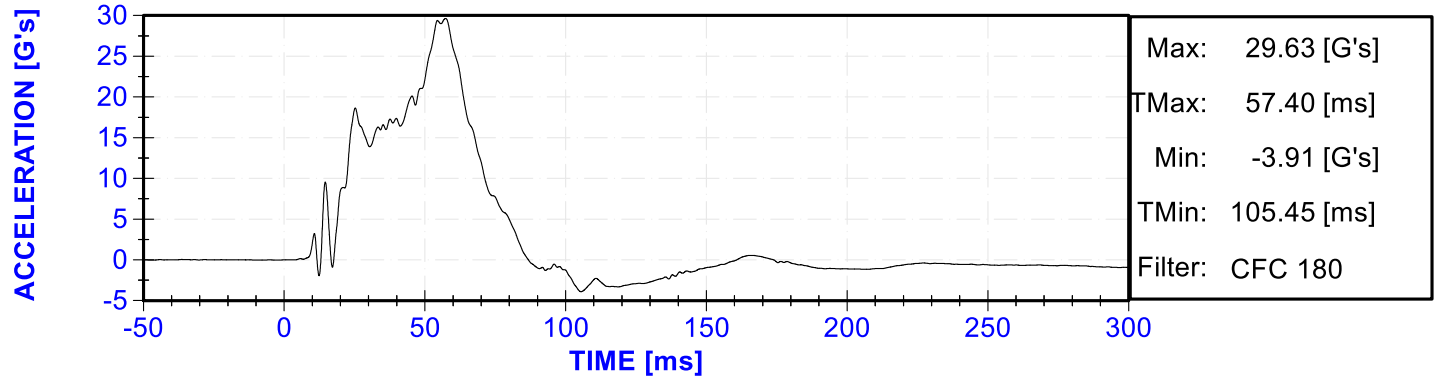

Passenger Lower Spine T12 Acceleration (Z) vs. Time

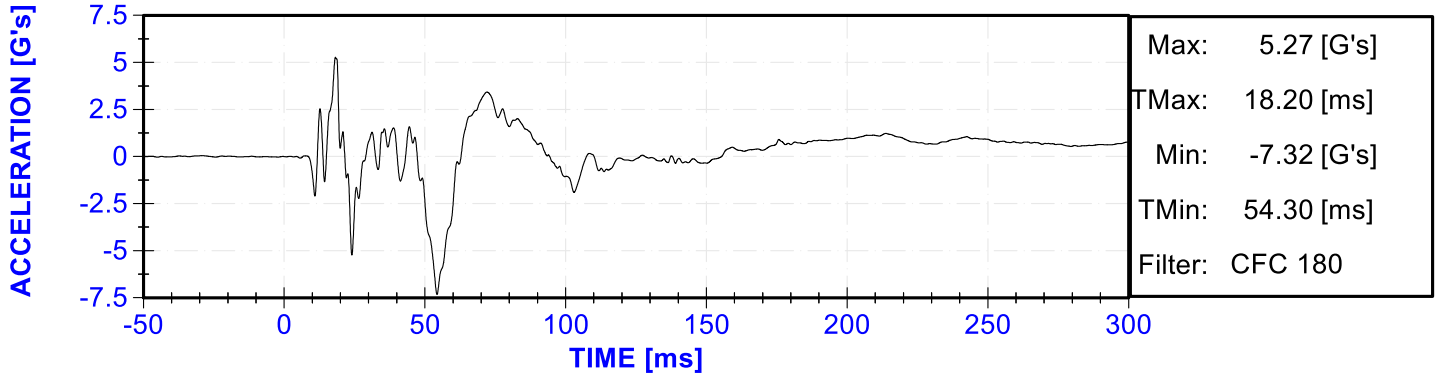

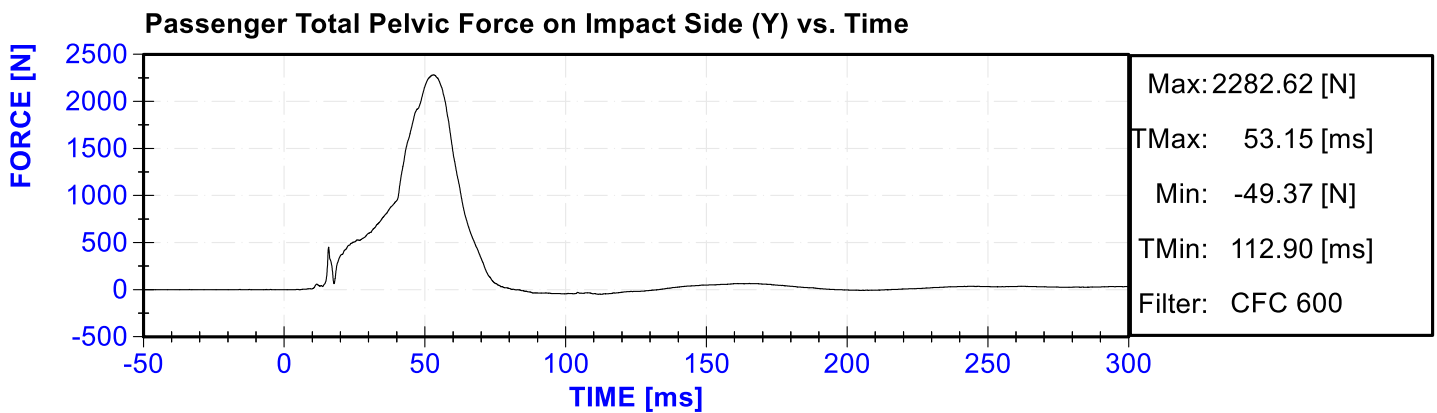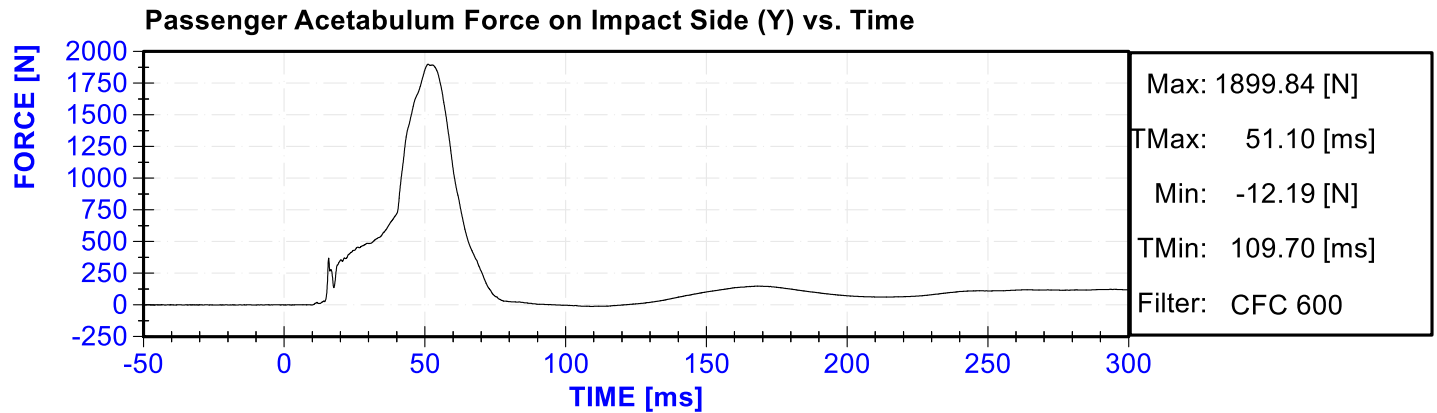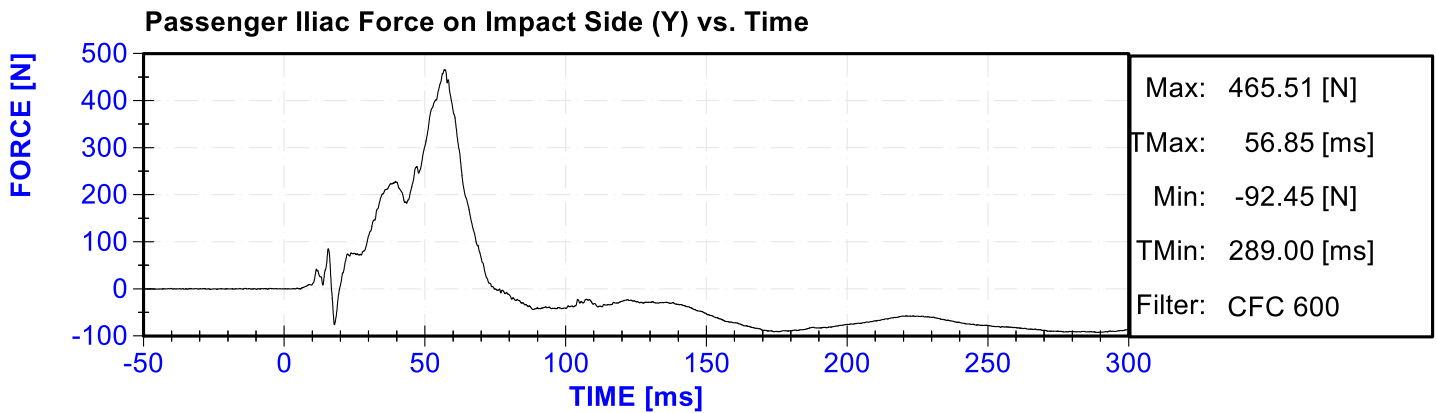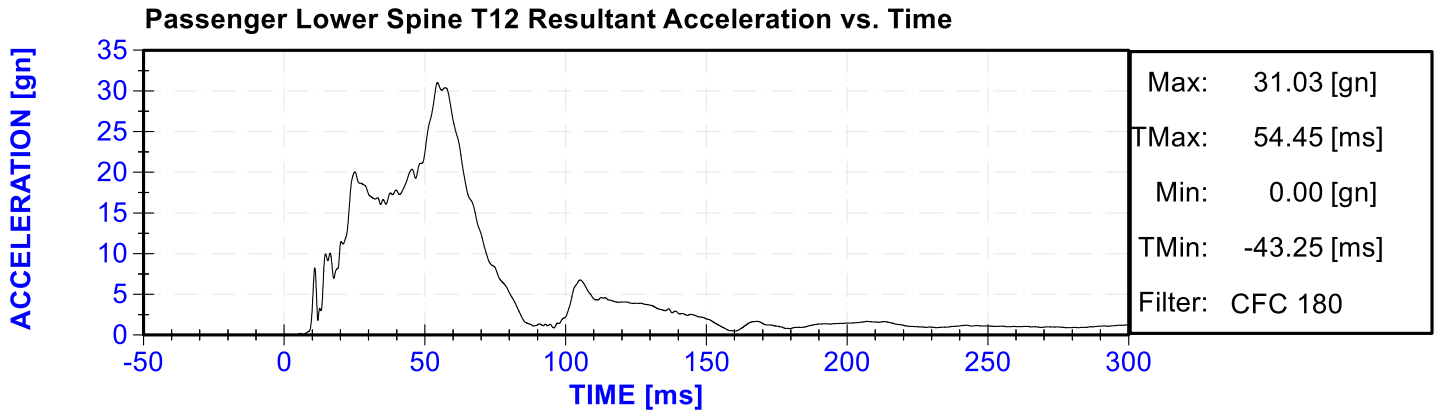

## APPENDIX C

### DUMMY PERFORMANCE CALIBRATION TEST DATA

**CALIBRATION TEST RESULTS**

**PRE-TEST**

**EUROSID 2 (ES-2RE) MALE – DRIVER ATD**

**SERIAL NO: F033**

**(CONFIGURED FOR LEFT SIDE IMPACT)**




External Measurements - EuroSID-2re


Technician: K. Dutton

Date: 11/24/2020

Dummy Serial Number: F033

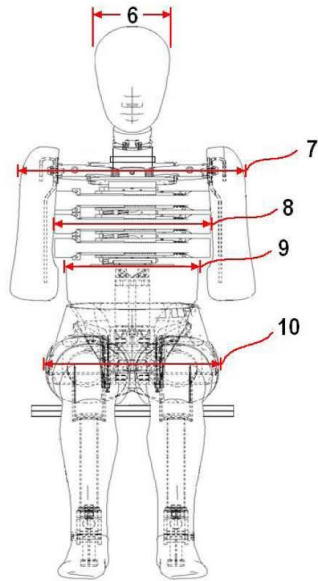

FRONT VIEW

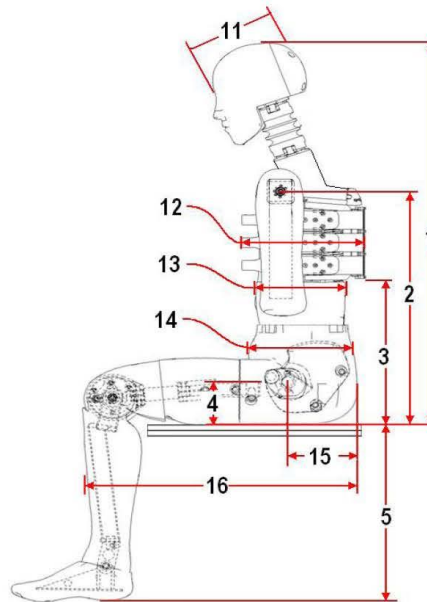

SIDE VIEW

Dim. No.	Description	Specification (mm)		Result (mm)	Pass/Fail
1	Sitting Height	900	918	911	Pass
2	Seat to Shoulder Joint	558	572	569	Pass
3	Seat to Lower Face of Thoracic Spine Box	346	356	352	Pass
4	Seat to Hip Joint (center of bolt)	97	103	101	Pass
5	Sole to Seat, Sitting	333	451	426	Pass
6	Head Width	152	158	154	Pass
7	Shoulder/Arm Width	461	479	472	Pass
8	Thorax Width	322	332	328	Pass
9	Abdomen Width	273	287	285	Pass
10	Pelvis Lap Width	359	373	365	Pass
11	Head Depth	196	206	202	Pass
12	Thorax Depth	262	272	269	Pass
13	Abdomen Depth	194	204	202	Pass
14	Pelvis Depth	235	245	239	Pass
15	Back of Buttocks to Hip Joint (center of bolt)	150	160	155	Pass
16	Back of Buttocks to Front Knee	597	615	609	Pass


ATD Manufacturer	FTSS	Test Technician	C. Mantell
ATD Serial Number	F033	Laboratory Supervisor	K. Brogan




**Results**

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	20.7	Pass
Humidity	10	70	%	59.0	Pass
Resultant Acceleration	125	155	g's	139.3	Pass
Oscillation	0	15	%	2.63	Pass
Fore-Aft Acceleration	-15	15	g's	5.8	Pass

**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
X Accelerometer	ENDEVCO 7264CT	AC-P63861	11/24/2020	5/25/2021
Y Accelerometer	ENDEVCO 7264CT	AC-P49216	11/24/2020	5/25/2021
Z Accelerometer	ENDEVCO 7264	AC-P51303	11/24/2020	5/25/2021

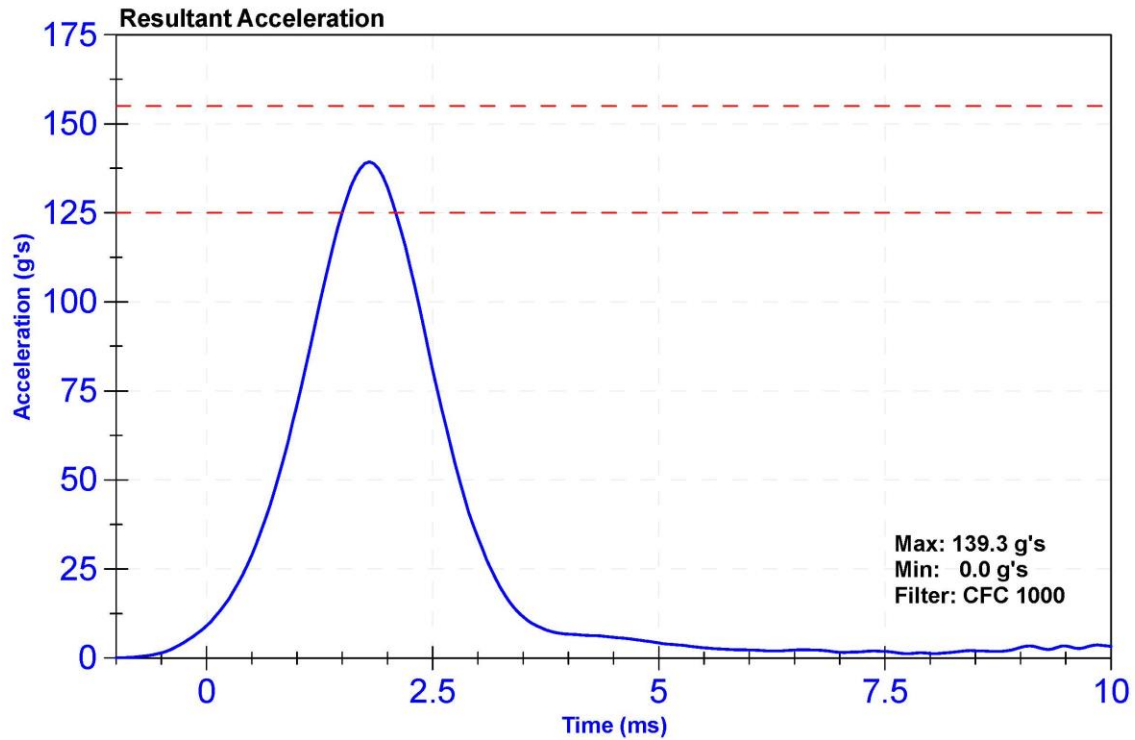

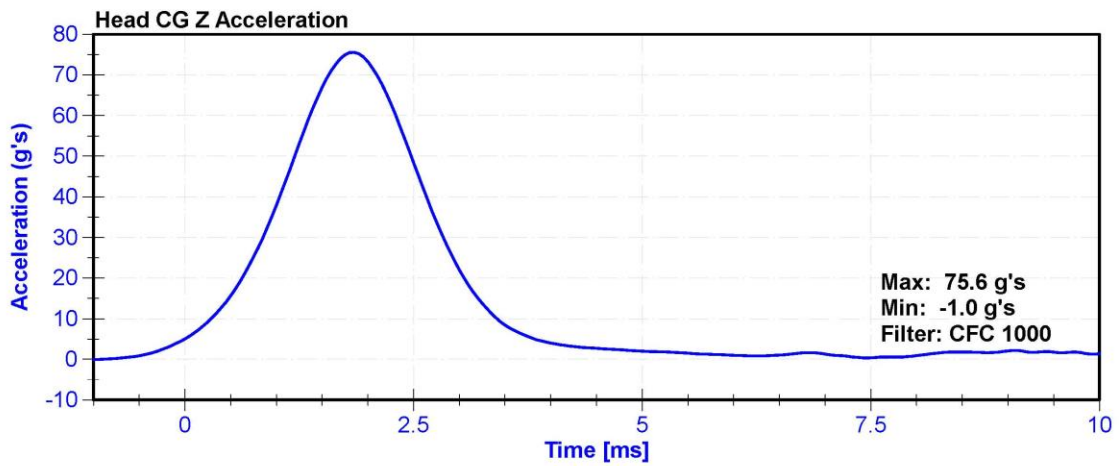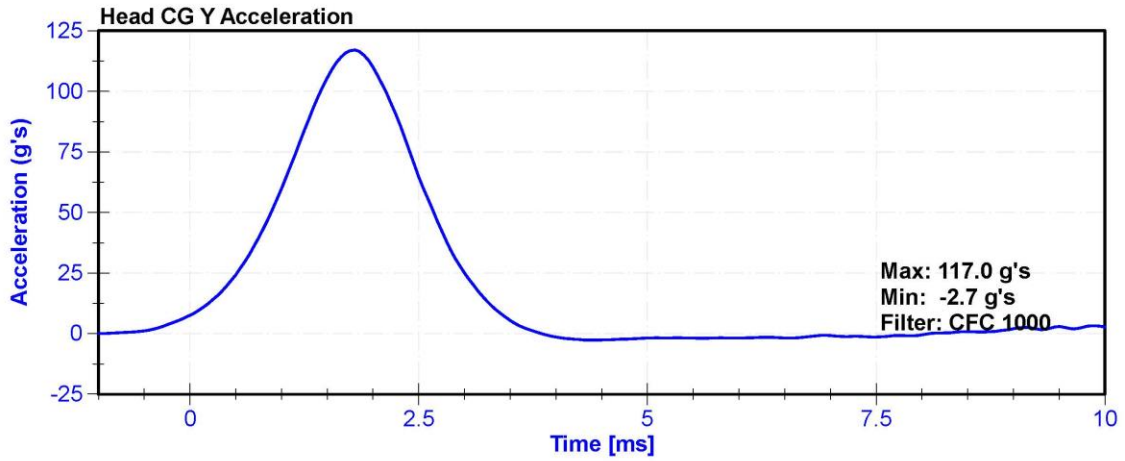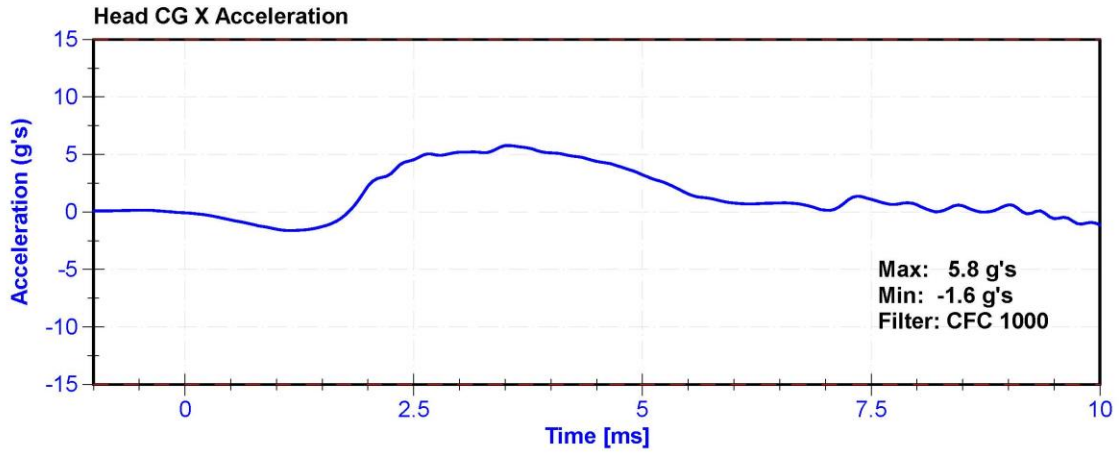


ATD Manufacturer	FTSS	Test Technician	D.Reinhard
ATD Serial Number	F033	Laboratory Supervisor	K. Brogan

**Results**




Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	20.8	Pass
Humidity	10	70	%	38	Pass
Velocity	3.3	3.5	m/s	3.33	Pass
Lateral Neck Rotation	49	59	deg	49.8	Pass
Time at Maximum Rotation	54	66	ms	56.3	Pass
Time of Rotation Decay from Maximum	53	88	ms	55.5	Pass

**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	ENDEVCO 7231CT	AC-C16503	2/6/2020	2/5/2021
Front Pendulum Potentiometer	SP22G	DS-094	8/18/2020	8/18/2021
Headform Potentiometer	SP22G	DS-095	8/18/2020	8/18/2021

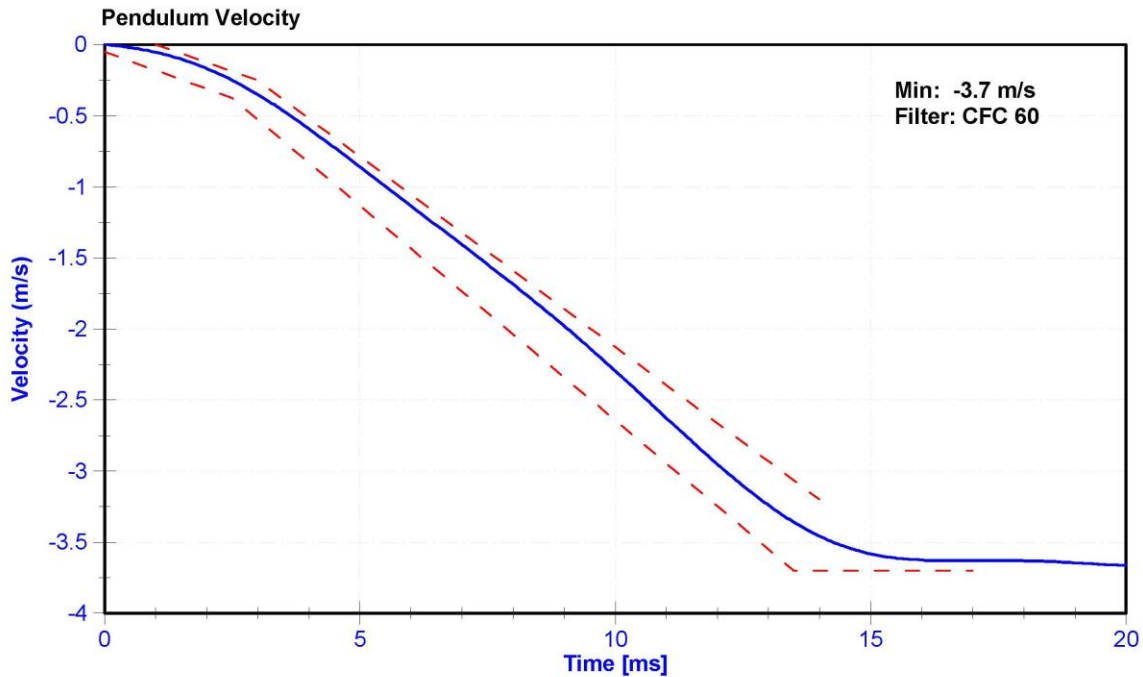



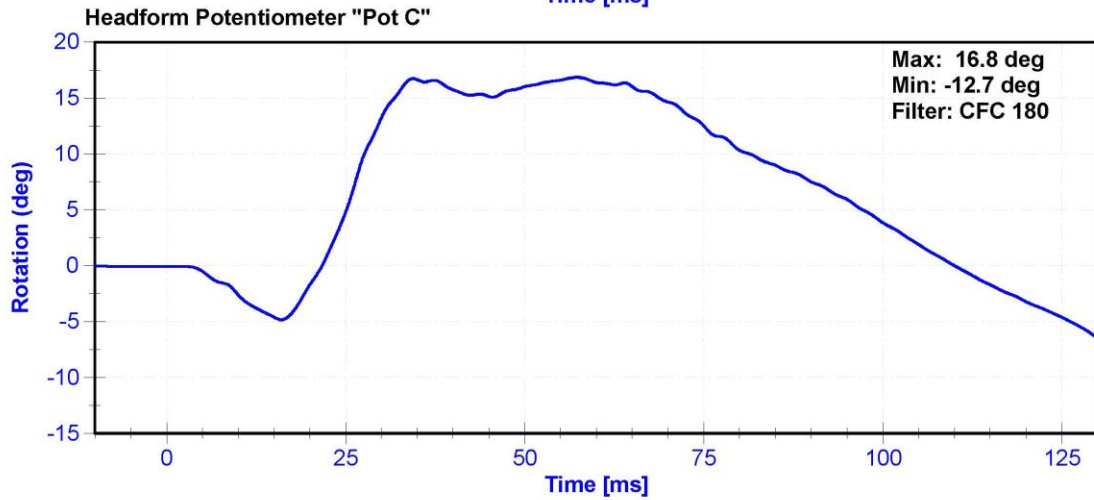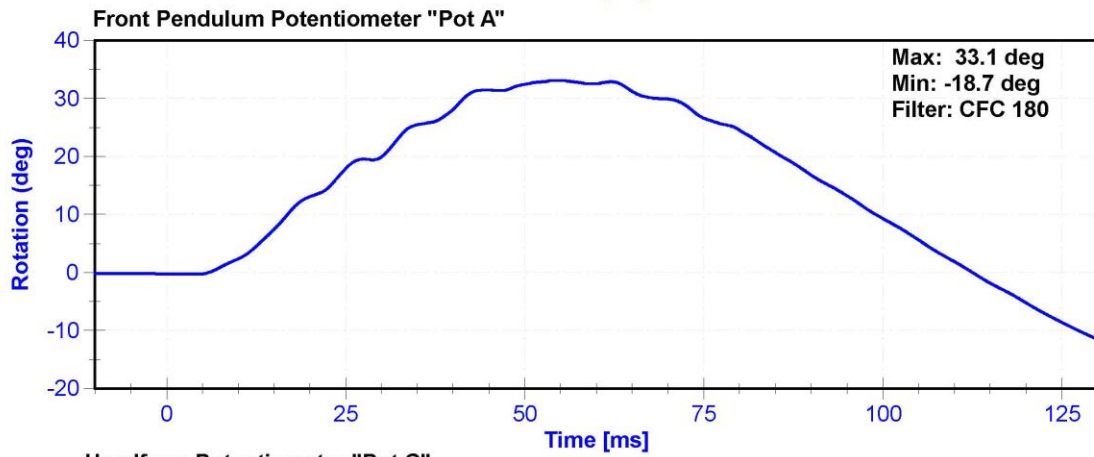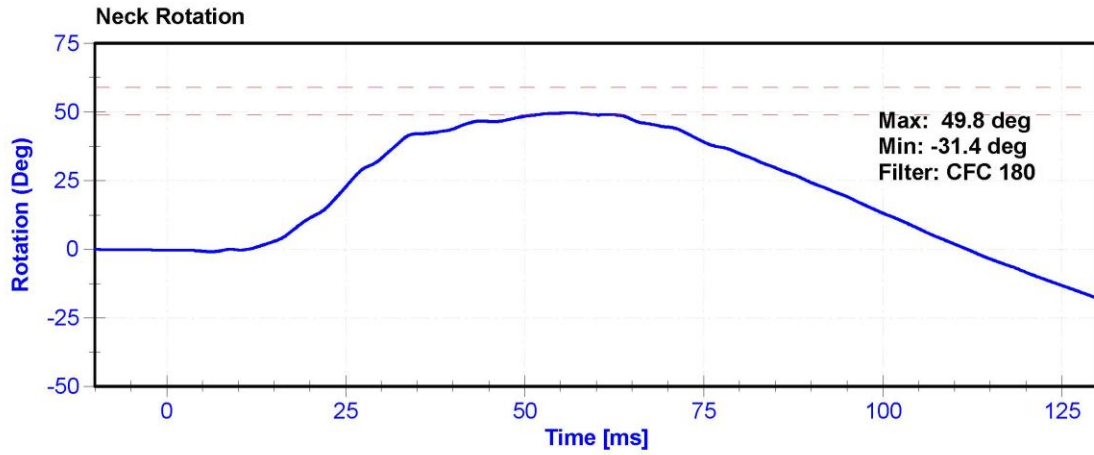


ATD Manufacturer	FTSS	Test Technician	D.Reinhard
ATD Serial Number	F033	Laboratory Supervisor	K. Brogan

**Results**

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	20.9	Pass
Humidity	10	70	%	38.0	Pass
Velocity	4.2	4.4	m/s	4.38	Pass
Probe Acceleration	7.5	10.5	g's	9.91	Pass

**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Probe Accelerometer	MSI 64C-2000	A286228	1/29/2020	1/28/2021

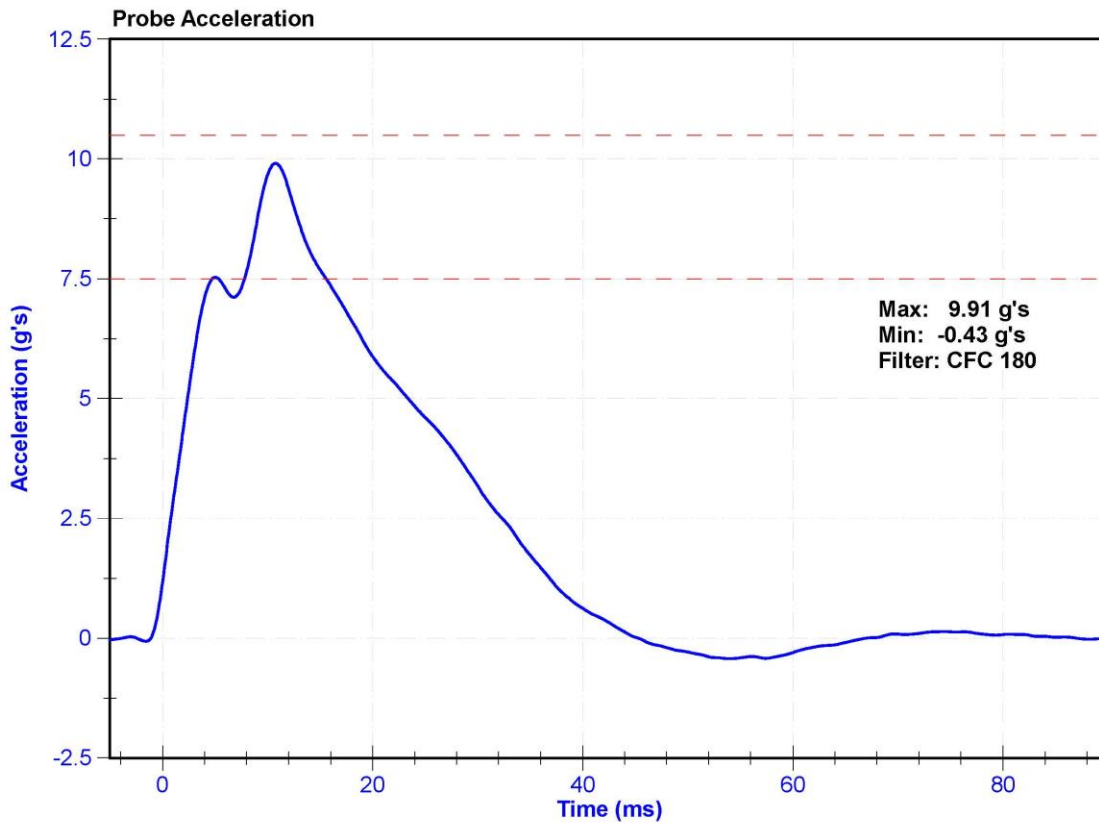


ATD Manufacturer	FTSS	Test Technician	D.Reinhard
ATD Serial Number	F033	Laboratory Supervisor	K. Brogan

**Results**

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	20.6	Pass
Humidity	10	70	%	36.0	Pass
Rib Displacement	36	40	mm	37.1	Pass

**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Rib Potentiometer	Honeywell MLT-38000203	DS-179GFE	11/25/2020	5/26/2021

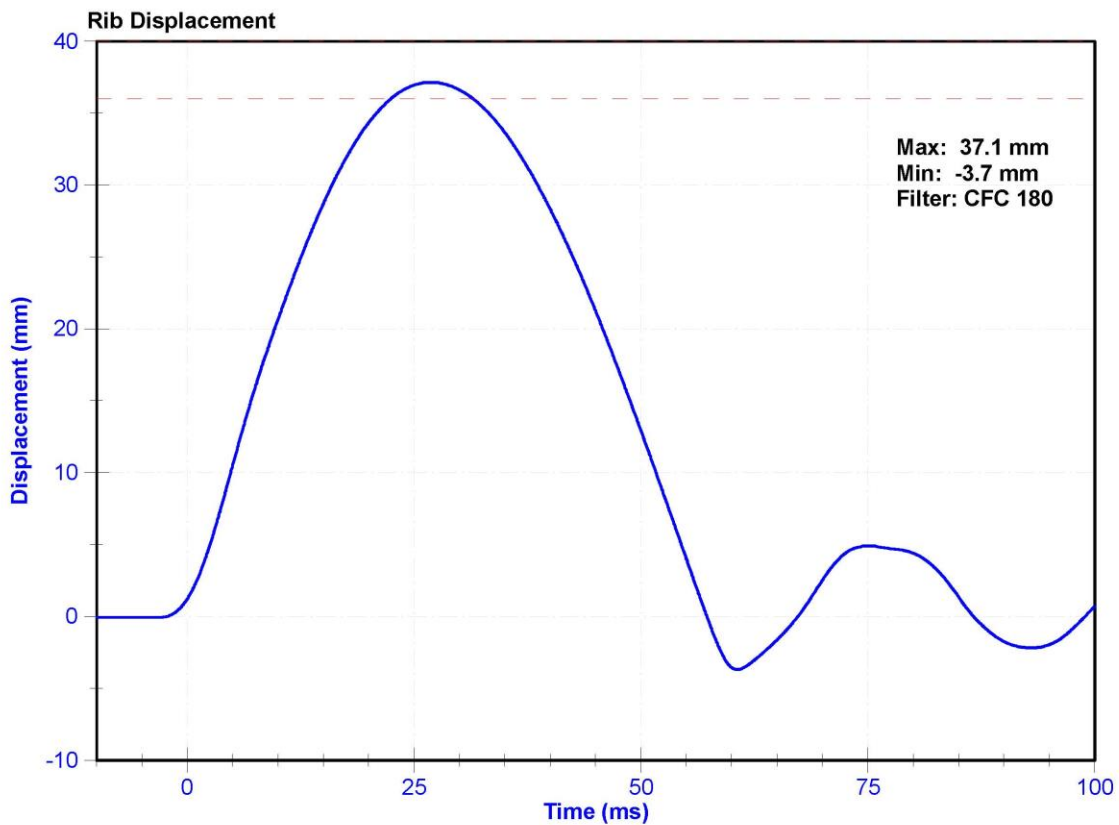


ATD Manufacturer	FTSS	Test Technician	D.Reinhard
ATD Serial Number	F033	Laboratory Supervisor	K. Brogan

**Results**

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	20.6	Pass
Humidity	10	70	%	36.0	Pass
Rib Displacement	46	51	mm	48.5	Pass

**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Rib Potentiometer	Honeywell MLT-38000203	DS-179GFE	11/25/2020	5/26/2021

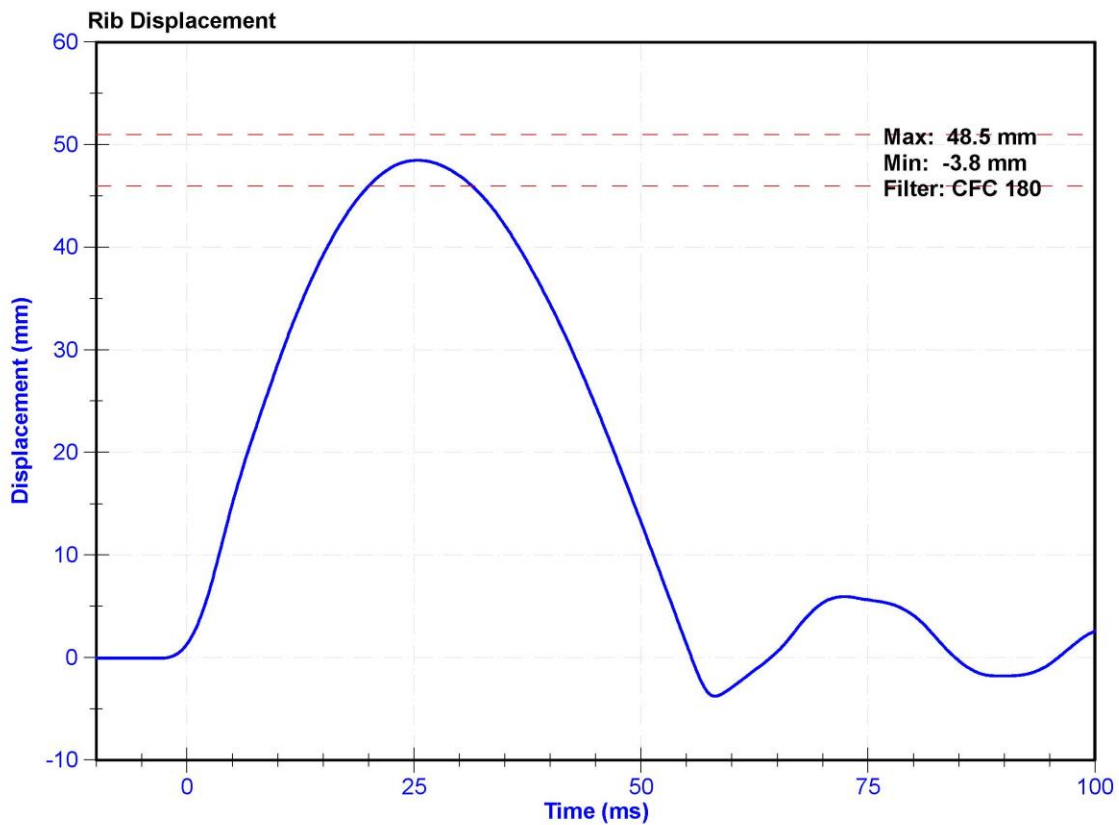


ATD Manufacturer	FTSS	Test Technician	D.Reinhard
ATD Serial Number	F033	Laboratory Supervisor	K. Brogan

**Results**

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	20.6	Pass
Humidity	10	70	%	36.0	Pass
Rib Displacement	36	40	mm	37.3	Pass

**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Rib Potentiometer	Honeywell MLT-38000203	DS-185GFE	11/25/2020	5/26/2021

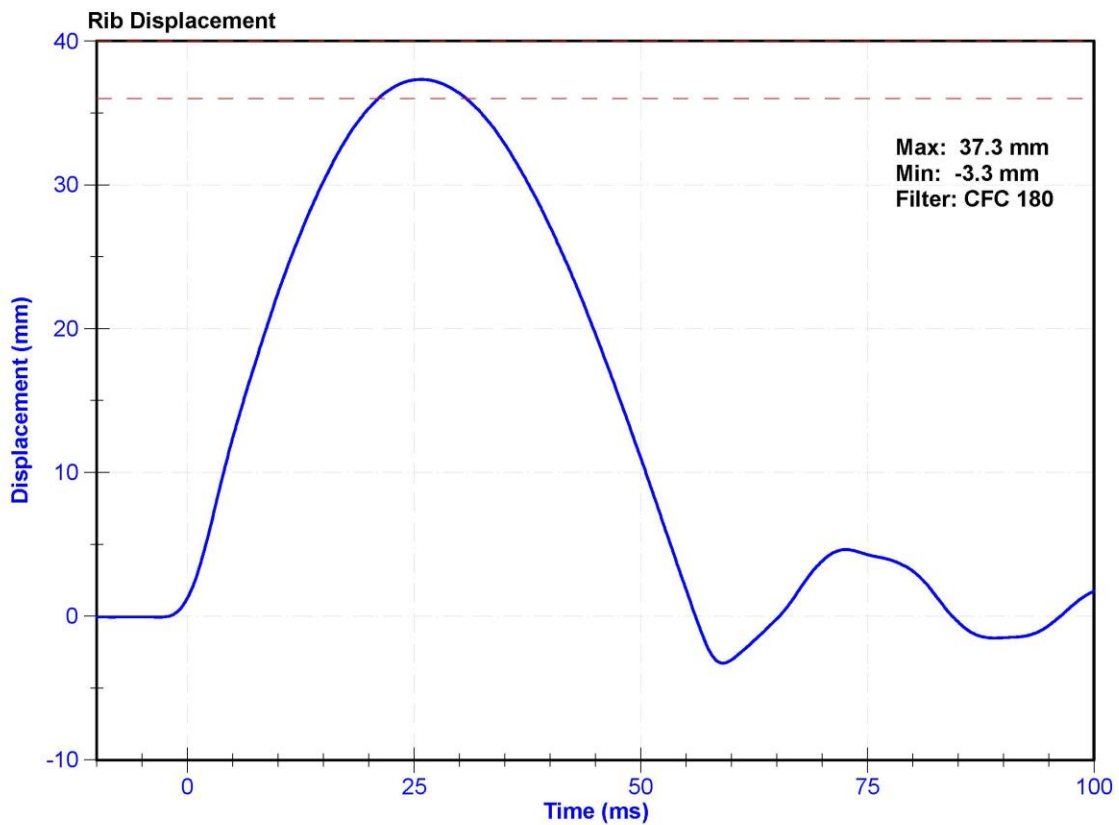


ATD Manufacturer	FTSS	Test Technician	D.Reinhard
ATD Serial Number	F033	Laboratory Supervisor	K. Brogan

**Results**

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	20.6	Pass
Humidity	10	70	%	36.0	Pass
Rib Displacement	46	51	mm	48.4	Pass

**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Rib Potentiometer	Honeywell MLT-38000203	DS-185GFE	11/25/2020	5/26/2021

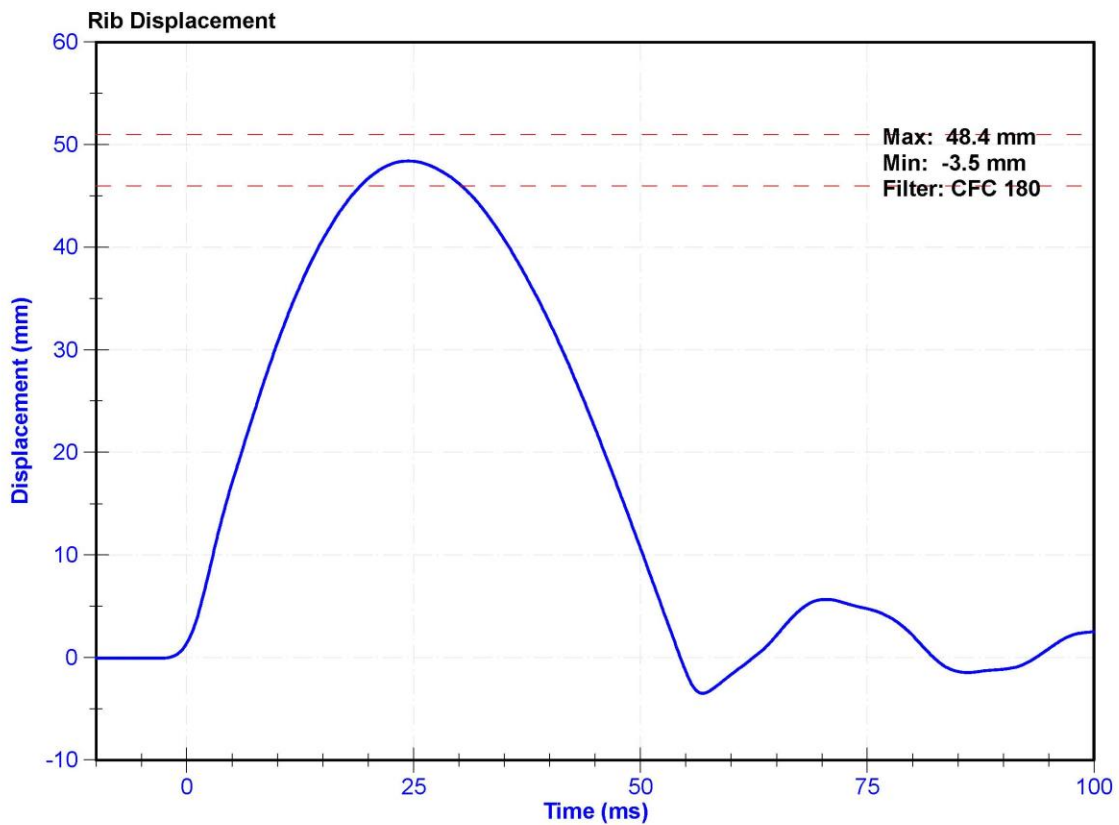


ATD Manufacturer	FTSS	Test Technician	D.Reinhard
ATD Serial Number	F033	Laboratory Supervisor	K. Brogan

**Results**

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	20.6	Pass
Humidity	10	70	%	36.0	Pass
Rib Displacement	36	40	mm	37.8	Pass

**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Rib Potentiometer	Honeywell MLT-38000203	DS-178GFE	11/25/2020	5/26/2021

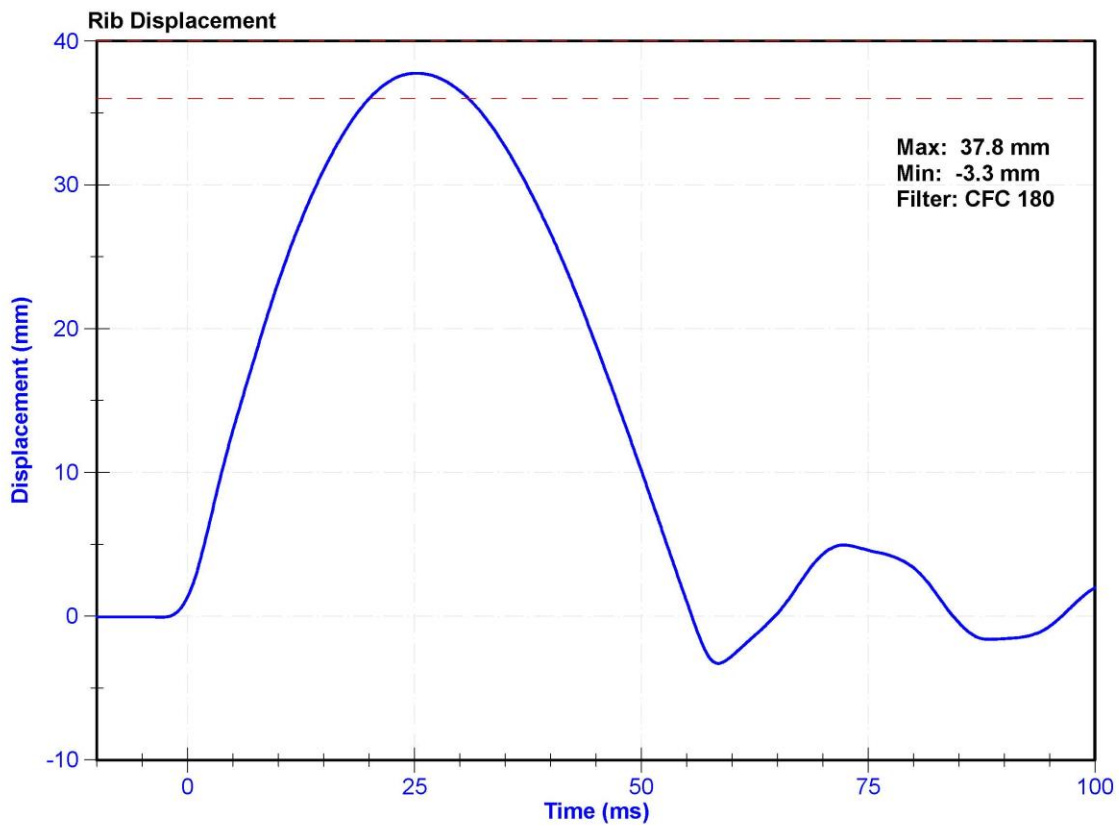


ATD Manufacturer	FTSS	Test Technician	D.Reinhard
ATD Serial Number	F033	Laboratory Supervisor	K. Brogan

**Results**

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	20.8	Pass
Humidity	10	70	%	30.4	Pass
Rib Displacement	46	51	mm	48.9	Pass

**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Rib Potentiometer	Honeywell MLT-38000203	DS-178GFE	11/25/2020	5/26/2021

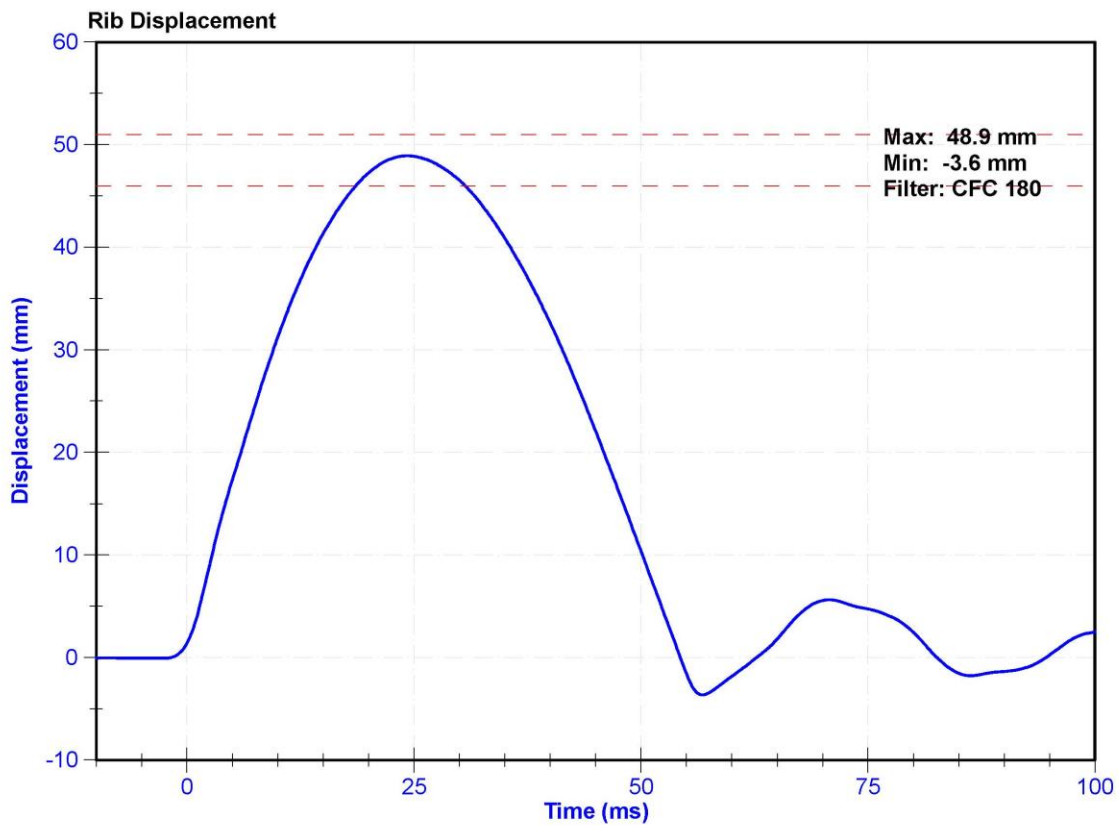




ATD Manufacturer	FTSS	Test Technician	D.Reinhard
ATD Serial Number	F033	Laboratory Supervisor	K. Brogan





**Results**

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	20.8	Pass
Humidity	10	70	%	37.0	Pass
Velocity	5.4	5.6	m/s	5.46	Pass
Resistive Force after 6ms	5100	6200	N	5703.0	Pass
Upper Thorax Rib Deflection	34	41	mm	35.6	Pass
Mid Thorax Rib Deflection	37	45	mm	40.5	Pass
Lower Thorax Rib Deflection	37	44	mm	40.8	Pass

**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Probe Accelerometer	MSI 64C-2000	A286228	1/29/2020	1/28/2021
Upper Thorax Rib Potentiometer	Honeywell MLT-38000203	DS-179GFE	11/25/2020	5/26/2021
Middle Thorax Rib Potentiometer	Honeywell MLT-38000203	DS-185GFE	11/25/2020	5/26/2021
Lower Thorax Rib Potentiometer	Honeywell MLT-38000203	DS-178GFE	11/25/2020	5/26/2021

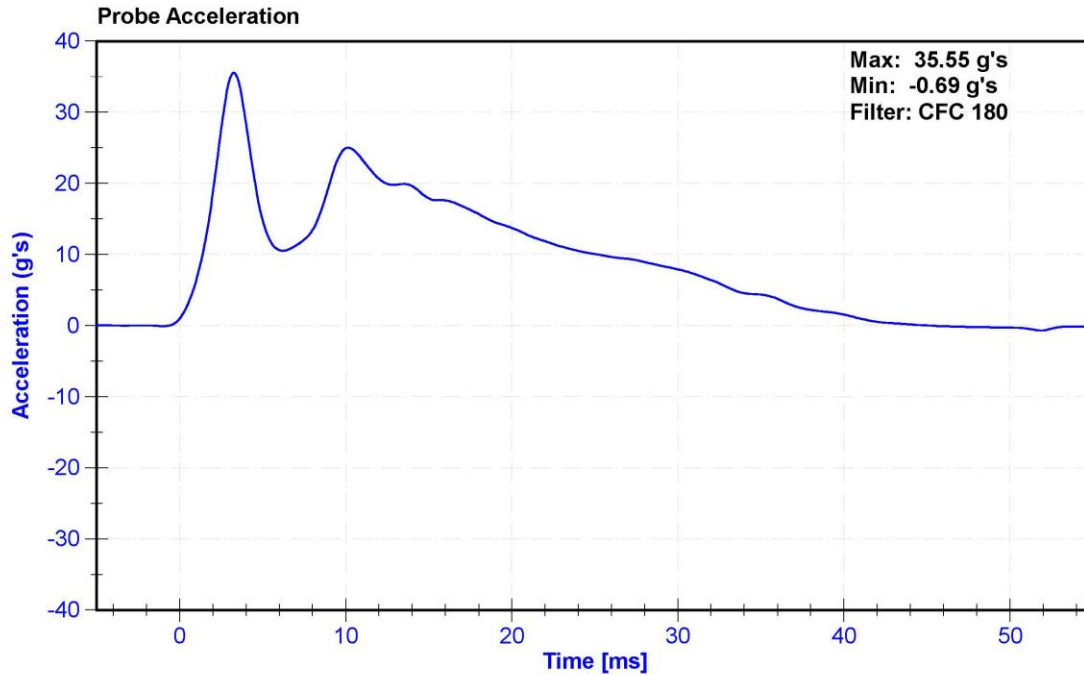

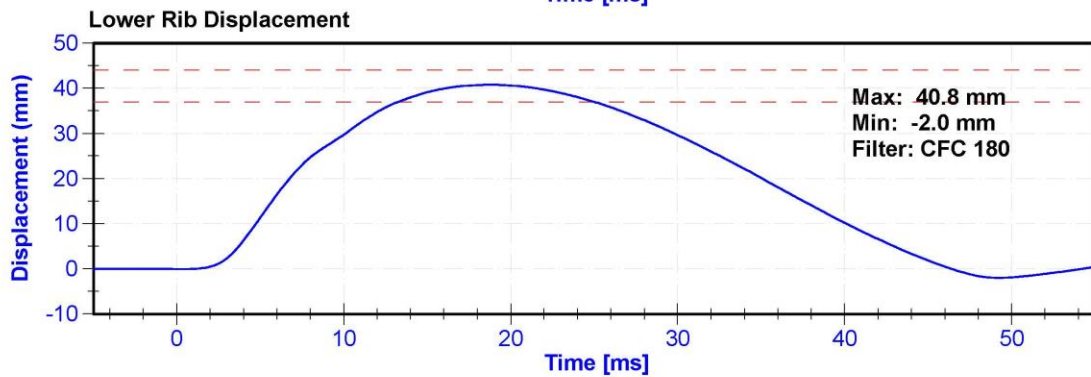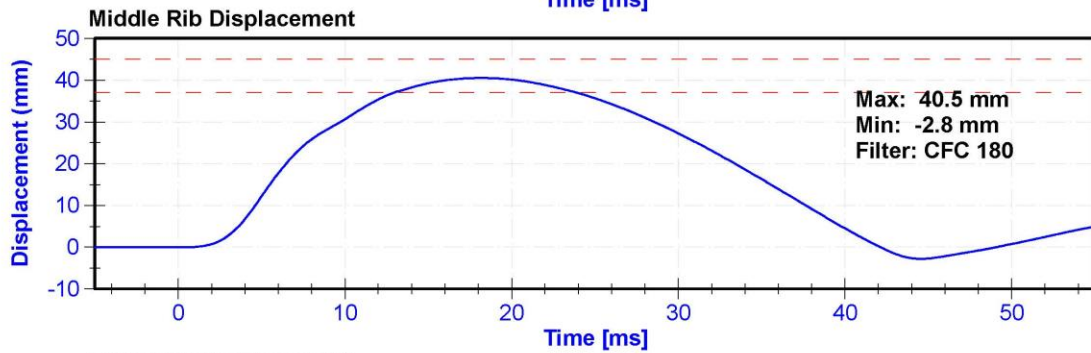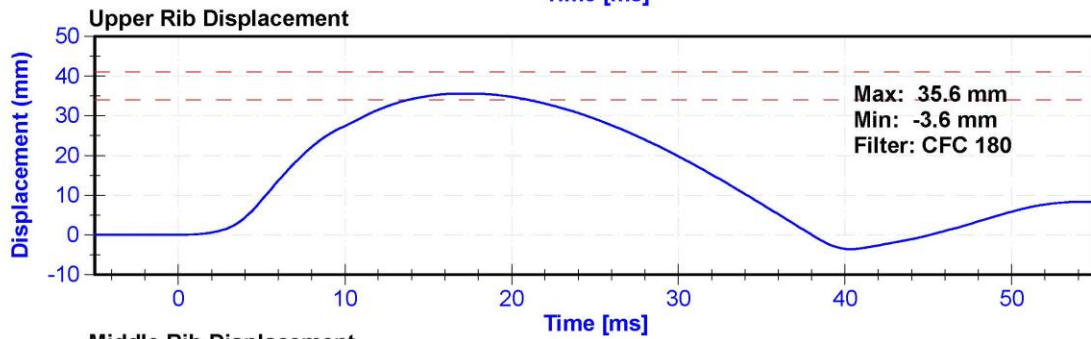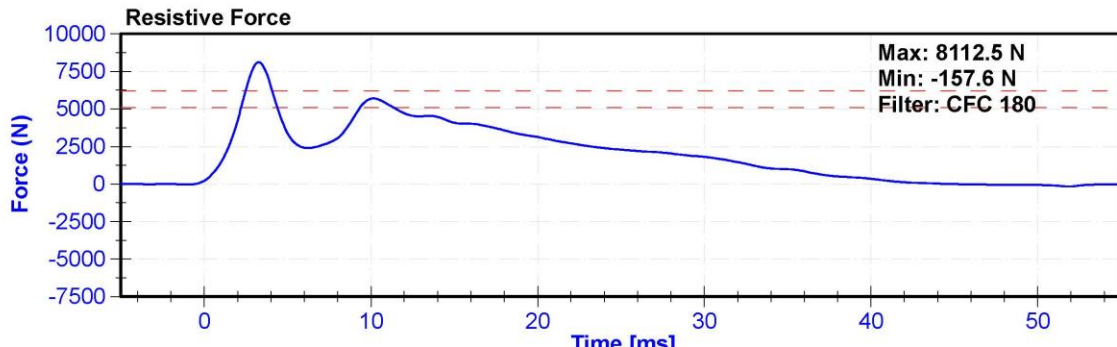


ATD Manufacturer	FTSS	Test Technician	D.Reinhard
ATD Serial Number	F033	Laboratory Supervisor	K.Brogan





**Results**

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	20.7	Pass
Humidity	10	70	%	37	Pass
Velocity	3.9	4.1	m/s	4.10	Pass
Combined Abdomen Force	2200	2700	N	2410.6	Pass
Time at Peak Abdomen Force	10.0	12.3	ms	10.70	Pass
Resistive Probe Force	4000	4800	N	4585.4	Pass
Time at Peak Resistive Force	10.6	13.0	ms	10.90	Pass

**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	MSI 64C-2000	A286228	1/29/2020	1/28/2021
Front Abdomen Load Cell	DENTON 2631J	26311512 GFE	3/19/2020	3/19/2021
Middle Abdomen Load Cell	DENTON 2631J	26311526 GFE	3/19/2020	3/19/2021
Rear Abdomen Load Cell	DENTON 2631J	26311516 GFE	3/19/2020	3/19/2021

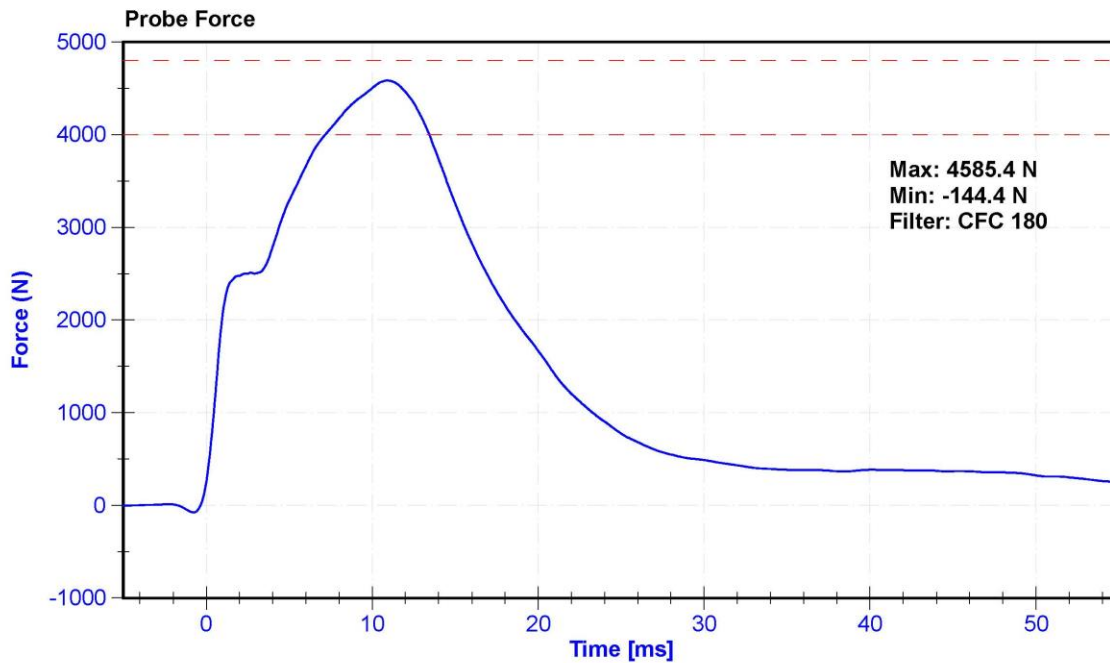

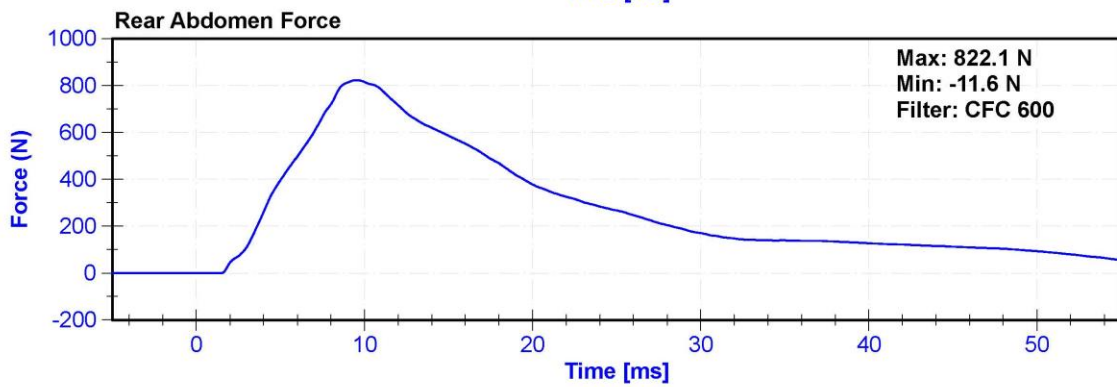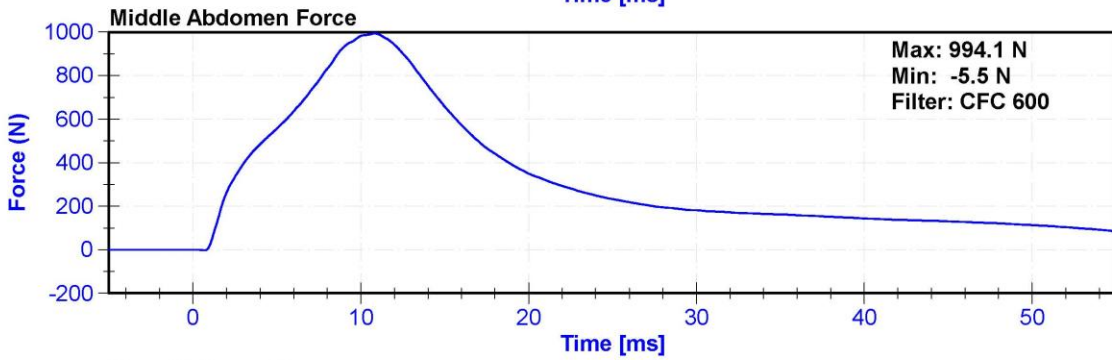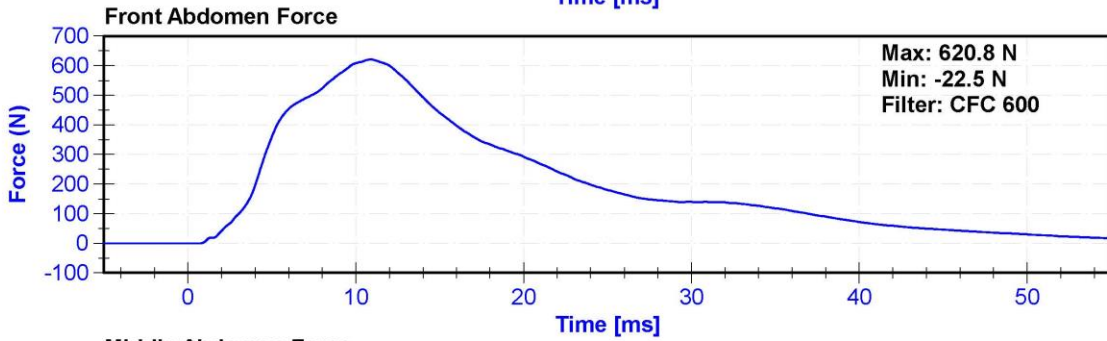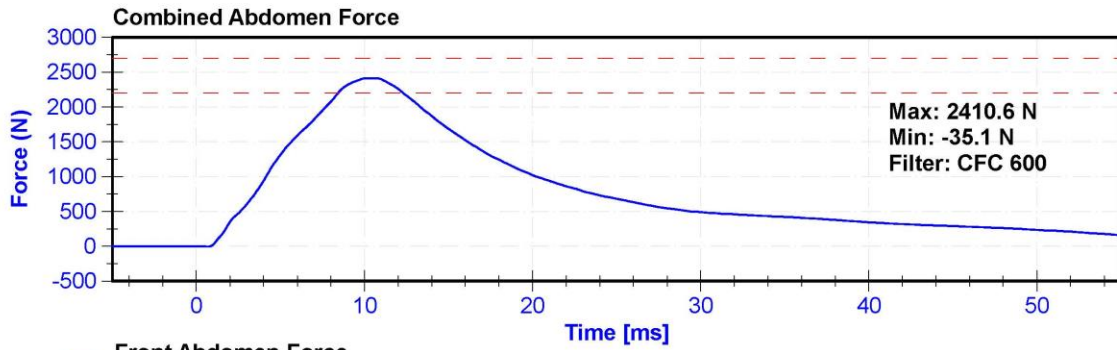



ATD Manufacturer	FTSS	Test Technician	D. Reinhard
ATD Serial Number	F033	Laboratory Supervisor	K. Brogan



**Results**

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21.0	Pass
Humidity	10	70	%	31.0	Pass
Velocity	5.95	6.15	m/s	5.964	Pass
Lateral Spine Rotation	45	55	deg	50.2	Pass
Time at Maximum Rotation	39	53	ms	45.9	Pass
Time of Decay to Zero Degrees	37	57	ms	37.5	Pass
Pulse within Corridor?	-	-	-		

**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	ENDEVCO 7231CT	AC-C16503 Striker	2/6/2020	2/5/2021
Pendulum "A" Potentiometer	SP22G	DS-094	8/18/2020	8/18/2021
Condyle "B" Potentiometer	SP22G	DS-095	8/18/2020	8/18/2021

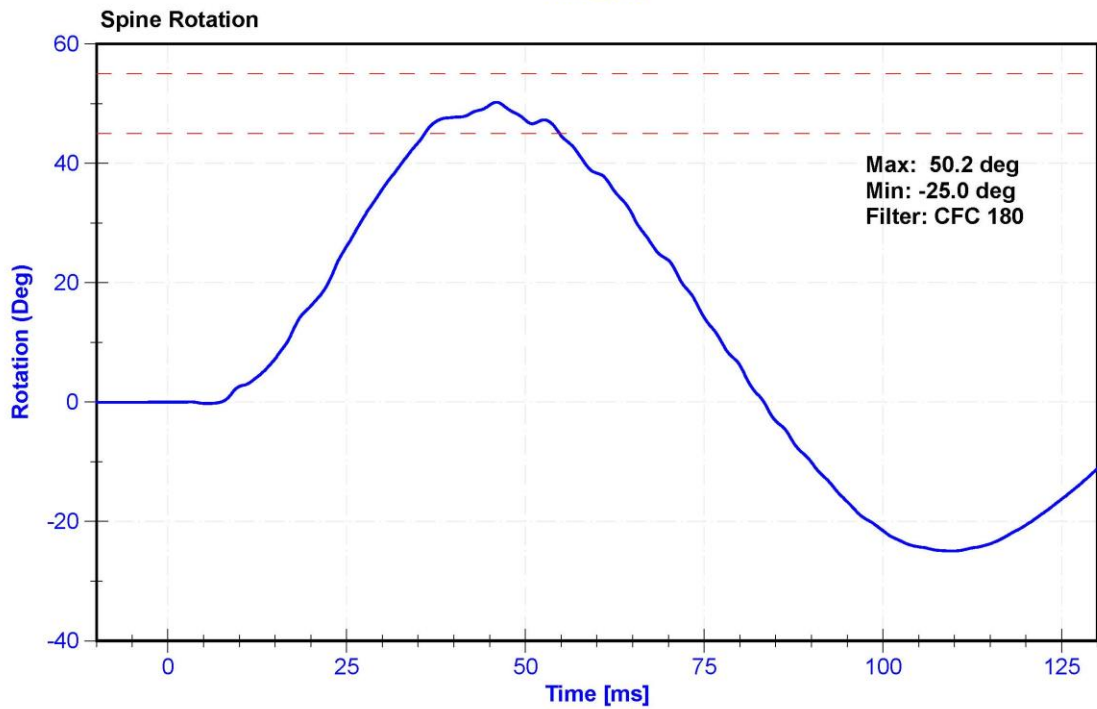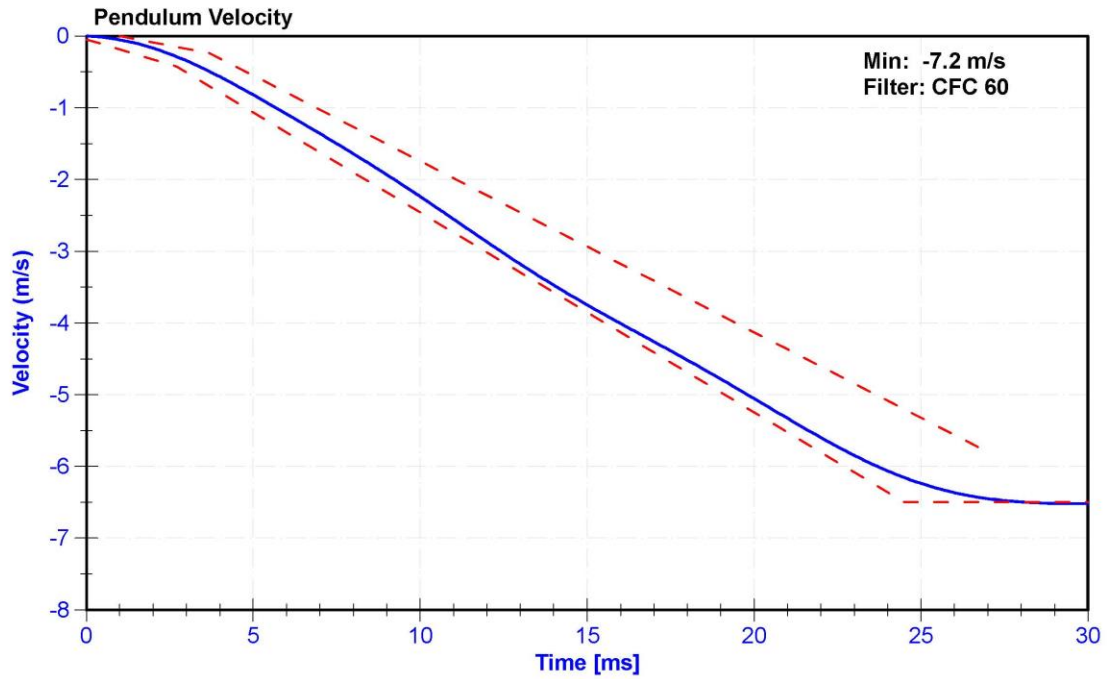

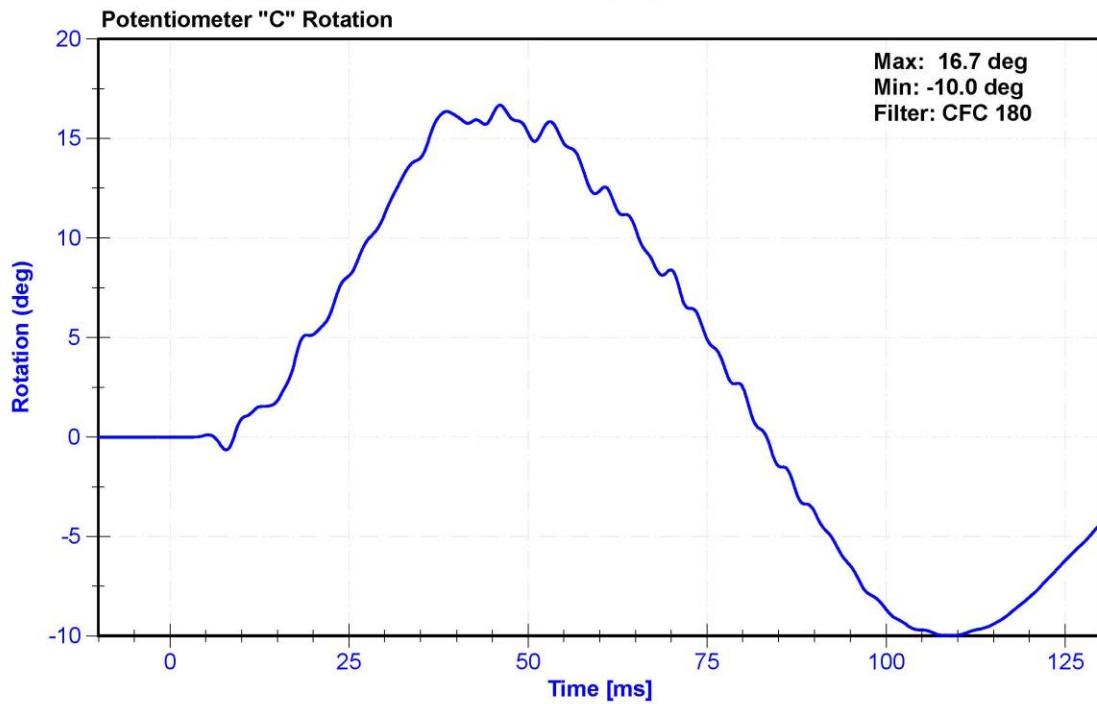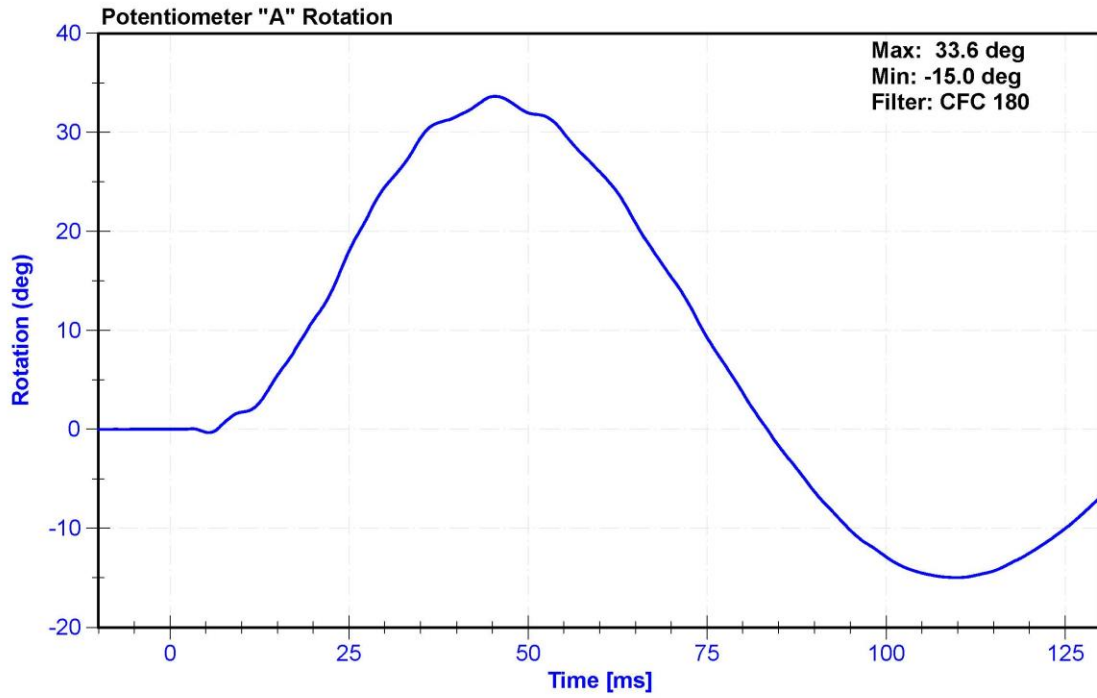


ATD Manufacturer	FTSS	Test Technician	D.Reinhard
ATD Serial Number	F033	Laboratory Supervisor	K. Brogan

**Results**



Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	20.8	Pass
Humidity	10	70	%	38.0	Pass
Velocity	4.2	4.4	m/s	4.39	Pass
Resistive Force	4700	5400	N	5341.2	Pass
Time at Peak Resistive Force	11.8	16.1	ms	12.55	Pass
Pubic Force	-1590	-1230	N	-1347.0	Pass
Time at Peak Pubic Force	12.2	17.0	ms	12.60	Pass

**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	MSI 64C-2000	A286228	1/29/2020	1/28/2021
Pubic Load Cell	Denton 3096JFL	LC-464fy	7/23/2020	7/23/2021

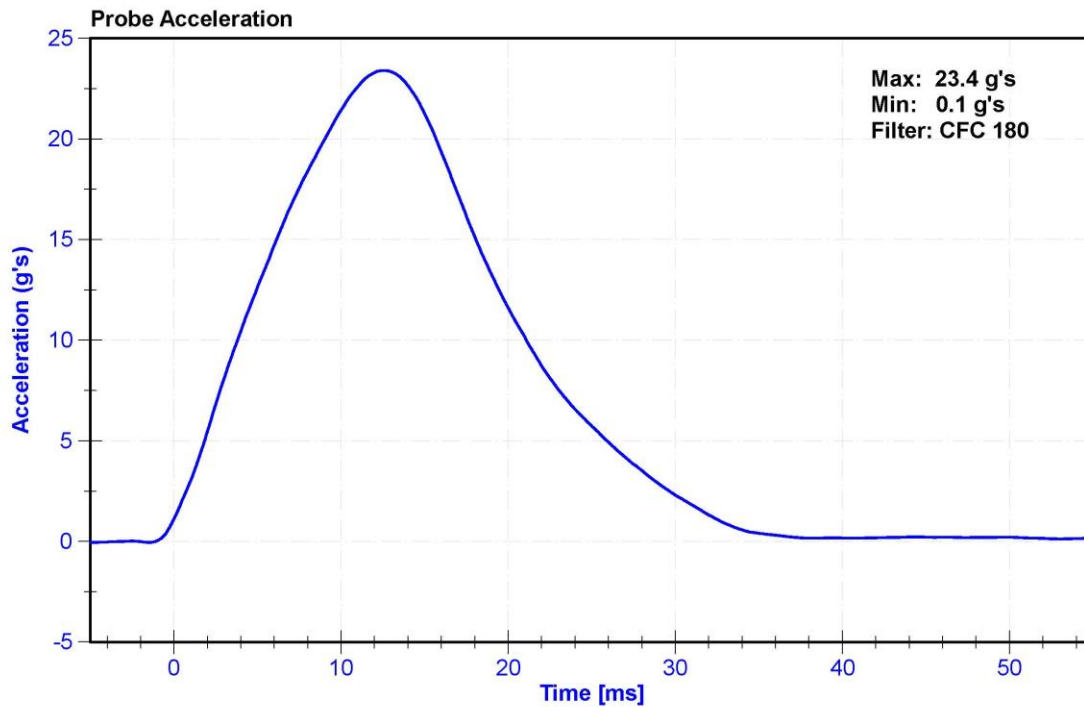



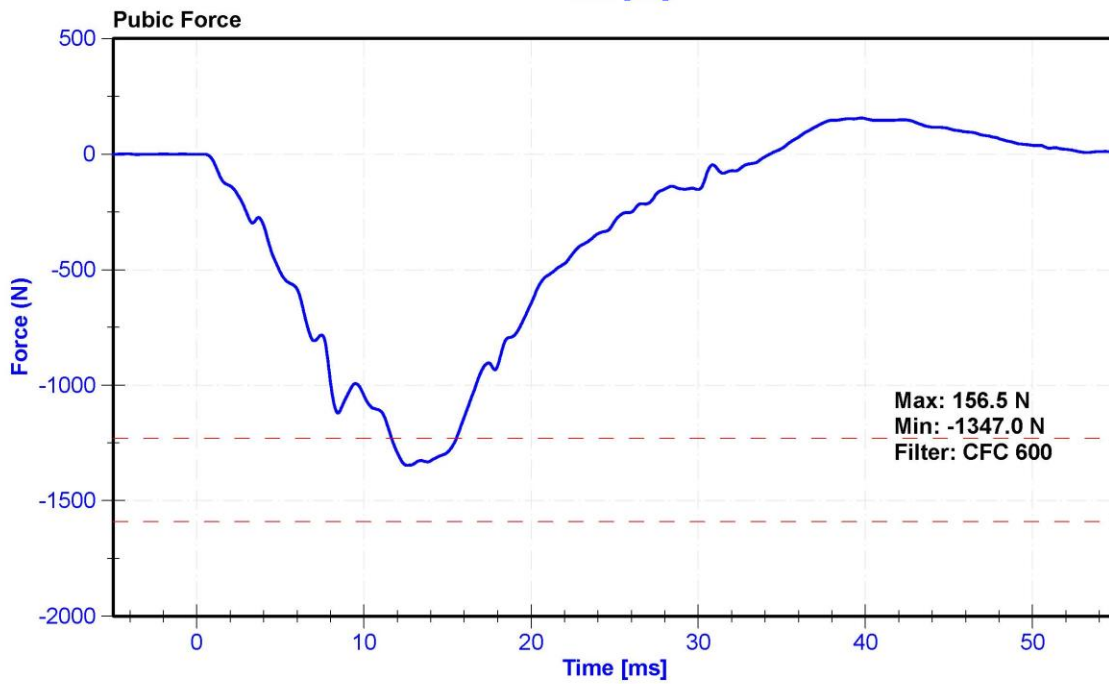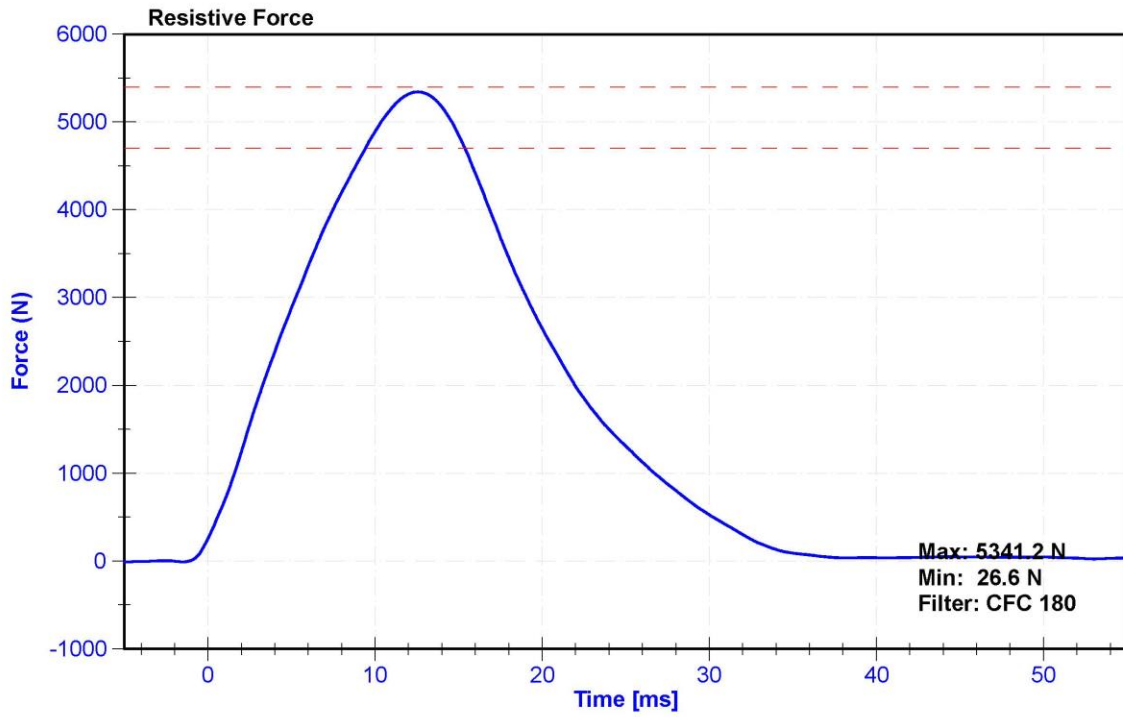

**CALIBRATION TEST RESULTS**

**PRE-TEST**

**SID-IIS 5<sup>TH</sup> PERCENTILE FEMALE - PASSENGER ATD**

**SERIAL No: DG8012**

**(CONFIGURED FOR LEFT SIDE IMPACT)**




External Measurements - SID-IIs

Technician: K. Dutton

Date: 12/07/2020

Dummy Serial Number: DG8012

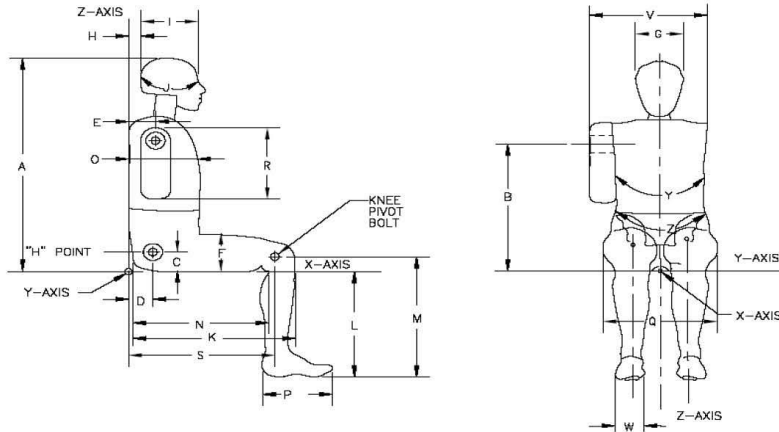

Symbol	Description	Specification (mm)		Result (mm)	Pass/Fail
A	Sitting Height	772	788	779	Pass
B	Shoulder Pivot Height	437	453	446	Pass
C	H-point Height	79	89	84	Pass
D	H-point from seatback	141	151	146	Pass
E	Shoulder Pivot from Backline	97	107	103	Pass
F	Thigh Clearance	119	135	127	Pass
G	Head Breadth	140	148	144	Pass
H	Head Back from Backline	40	46	44	Pass
I	Head Depth	178	188	184	Pass
J	Head Circumference	541	551	548	Pass
K	Buttock to Knee Length	514	540	533	Pass
L	Popliteal Height	343	369	357	Pass
M	Knee Pivot to floor height	392	409	402	Pass
N	Buttock Popliteal Length	416	442	433	Pass
O	Chest Depth w/o jacket	195	211	204	Pass
P	Foot Length	216	232	225	Pass
Q	Hip Breadth (w/pelvic plugs)	313	323	319	Pass
R	Arm Length	249	259	255	Pass
S	Knee Joint to seatback	477	493	486	Pass
V	Shoulder Width	341	357	346	Pass
W	Foot Width	78	94	85	Pass
Y	Chest Circumference w/jacket	851	881	867	Pass
Z	Waist Circumference	761	791	781	Pass


ATD Manufacturer	FTSS	Test Technician	K. Dutton
ATD Serial Number	DG8012	Laboratory Supervisor	K. Brogan




**Results**

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	20.8	Pass
Humidity	10	70	%	21.8	Pass
Resultant Acceleration	115	137	g's	130.3	Pass
Oscillation	0	15	%	7.8	Pass
Fore-Aft Acceleration	-15	15	g's	-2.9	Pass

**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
X Accelerometer	ENDEVCO 7264	AC-P74788	11/5/2020	5/6/2021
Y Accelerometer	ENDEVCO 7264CT	AC-P83432	11/5/2020	5/6/2021
Z Accelerometer	ENDEVCO 7264	AC-P83319	11/5/2020	5/6/2021

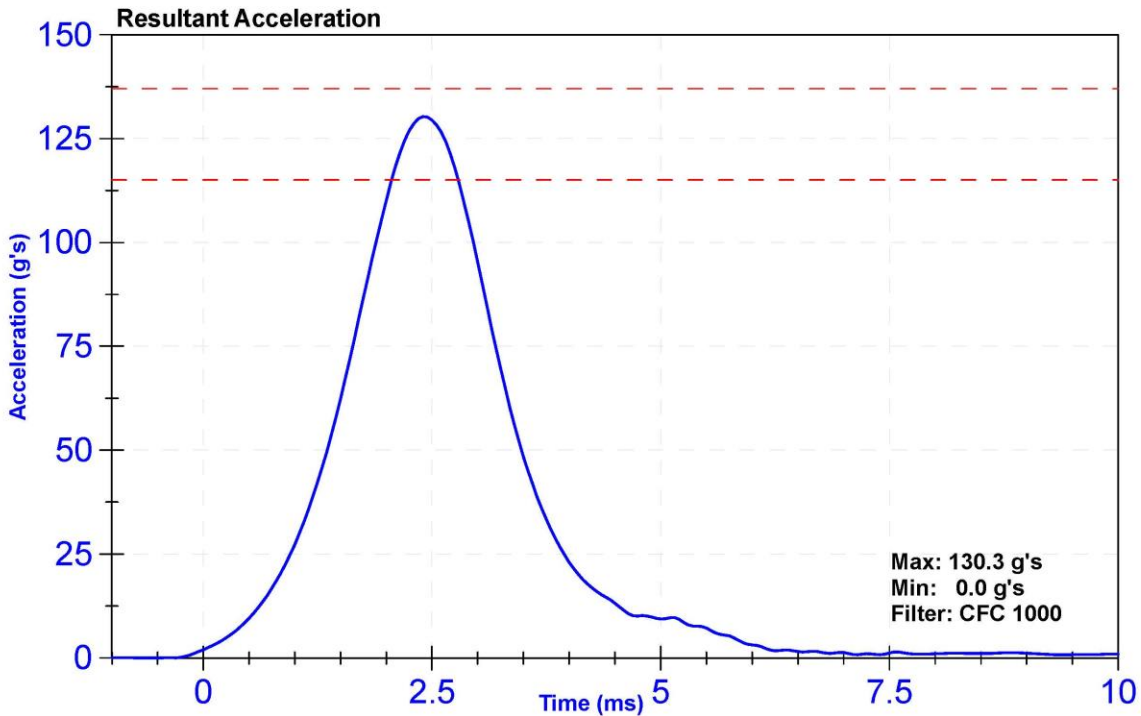

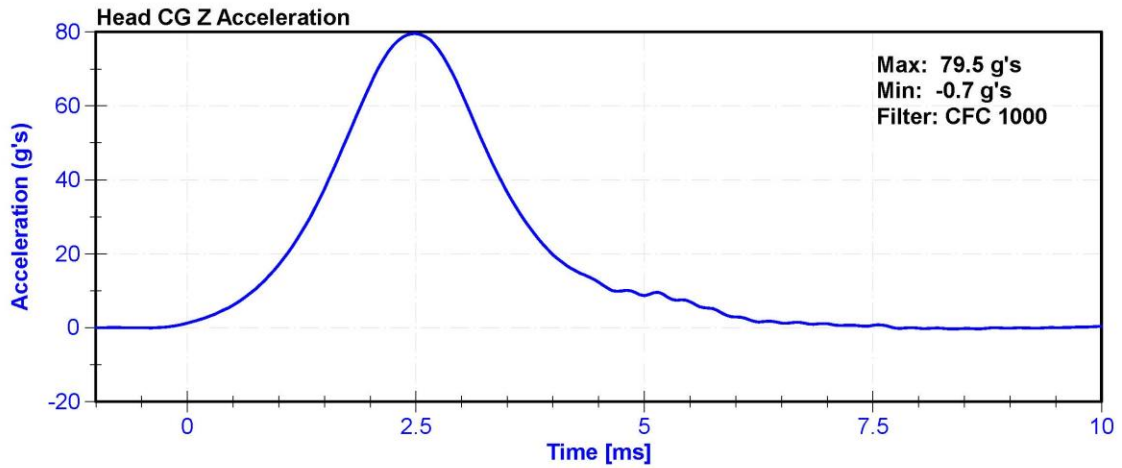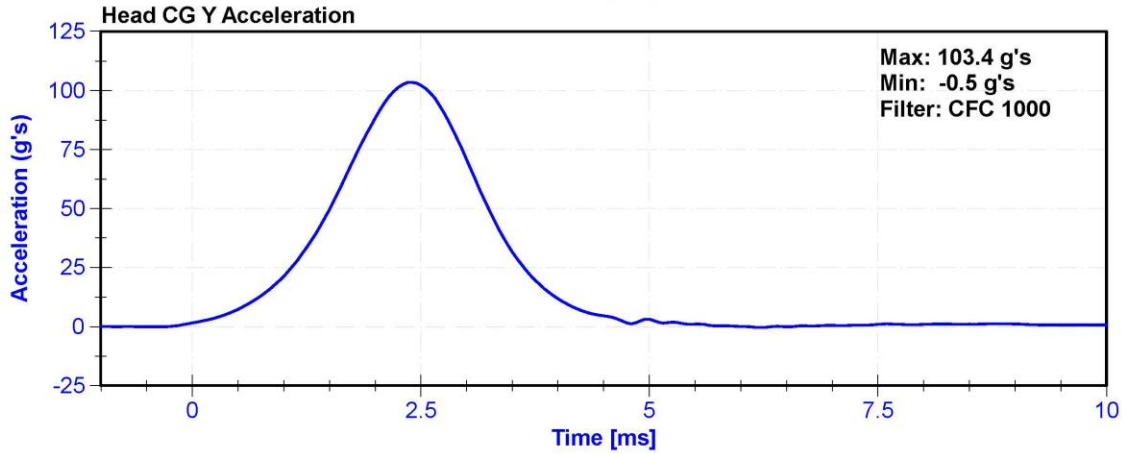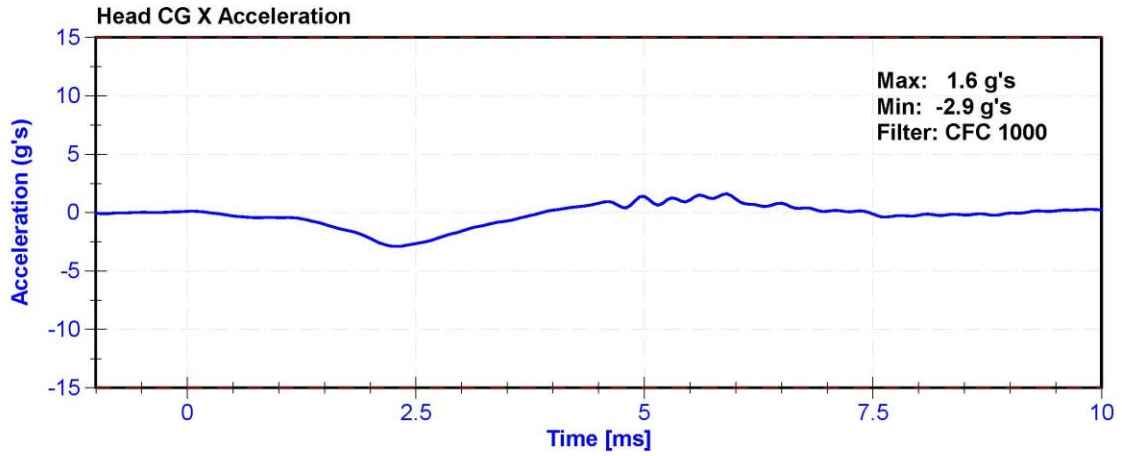


ATD Manufacturer	FTSS	Test Technician	E. Helenbrook
ATD Serial Number	DG8012	Laboratory Supervisor	K. Brogan



**Results**

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21.3	Pass
Humidity	10	70	%	22.3	Pass
Velocity	5.51	5.63	m/s	5.584	Pass
Pendulum Impulse at 10ms	2.2	2.8	m/s	2.27	Pass
Pendulum Impulse at 15ms	3.3	4.1	m/s	3.42	Pass
Pendulum Impulse at 20ms	4.4	5.4	m/s	4.56	Pass
Pendulum Impulse at 25ms	5.4	6.1	m/s	5.54	Pass
Pendulum Impulse from 25 to 100ms	5.5	6.2	m/s	6.07	Pass
Neck Rotation	71	81	deg	73.5	Pass
Time at Maximum Rotation	50	70	ms	59.9	Pass
Moment about the OC	36	44	Nm	43.0	Pass
Moment Decay to 0 Nm	102	126	ms	111.0	Pass

**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	ENDEVCO 7231CT	AC-C16503 Striker	2/6/2020	2/5/2021
Pendulum Potentiometer	Denton 78051-342	DS-184Pend	11/6/2020	11/6/2021
Condyle Potentiometer	Denton 78051-342	DS-185Pend	11/6/2020	11/6/2021
Upper Neck Load Cell	Denton 1716	17162019 FY	3/18/2020	3/18/2021

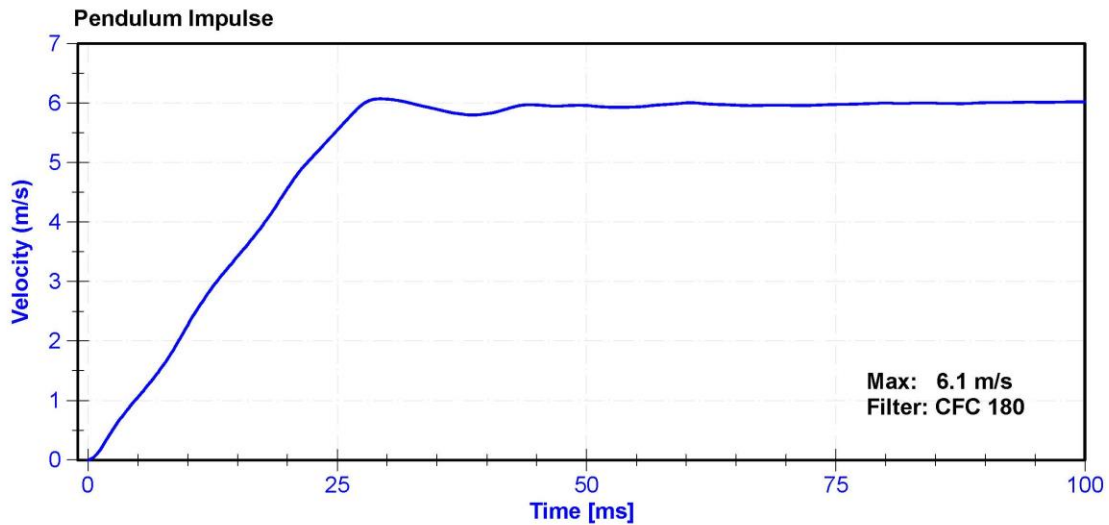

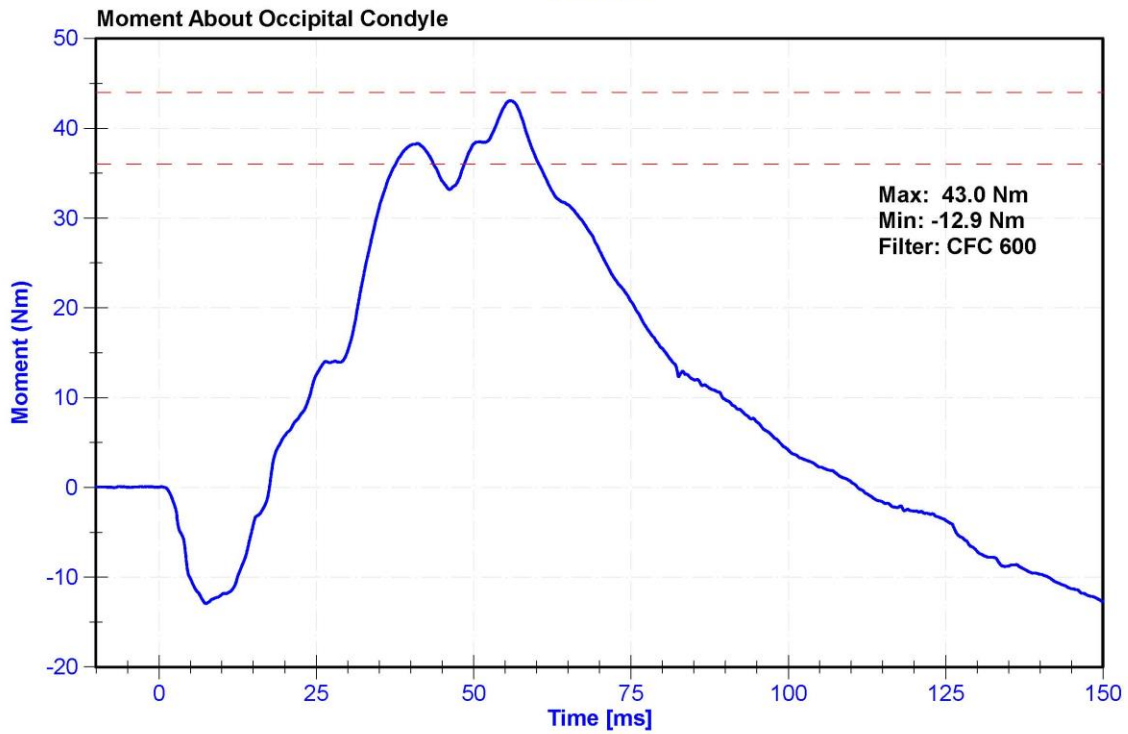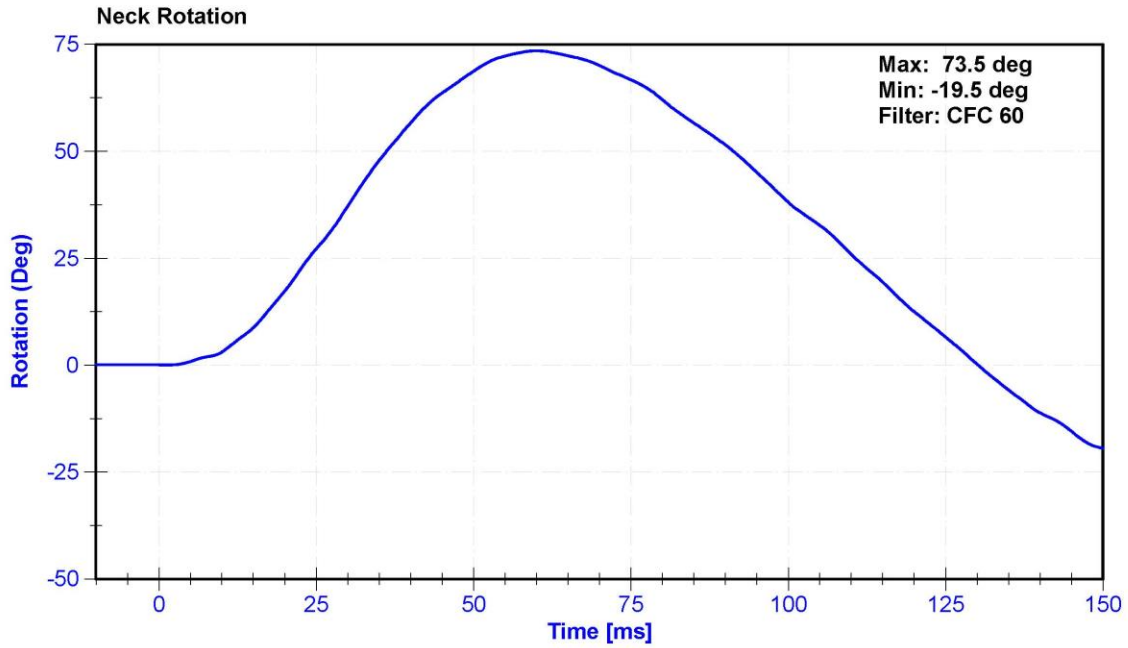


ATD Manufacturer	FTSS	Test Technician	D.Reinhard
ATD Serial Number	DG8012	Laboratory Supervisor	K. Brogan

**Results**



Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	20.9	Pass
Humidity	10	70	%	22	Pass
Velocity	4.2	4.4	m/s	4.34	Pass
Probe Acceleration	13	18	g's	16.3	Pass
Shoulder Deflection	28	37	mm	28.7	Pass
Lateral Upper Spine Acceleration	17	22	g's	21.4	Pass

**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	MSI 64C-2000	A286228	1/29/2020	1/28/2021
Shoulder Potentiometer	Servo 08TC1-3745	DS-1845GFE	12/2/2020	6/2/2021
Upper Spine Y Accelerometer	ENDEVCO 7264CT	AC-P64148	11/5/2020	5/6/2021

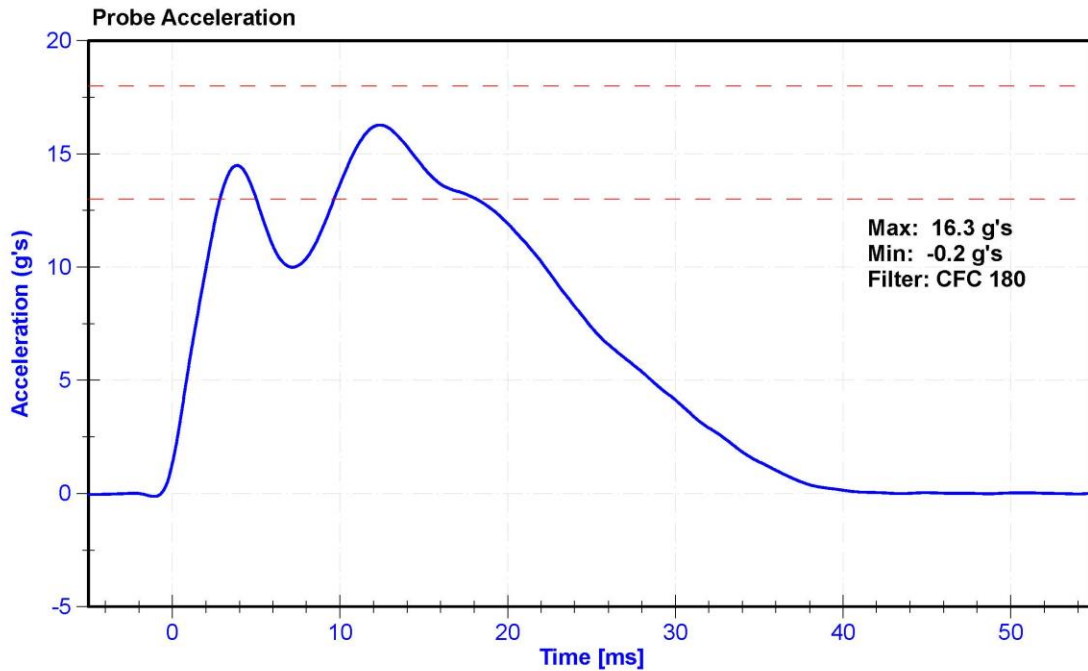



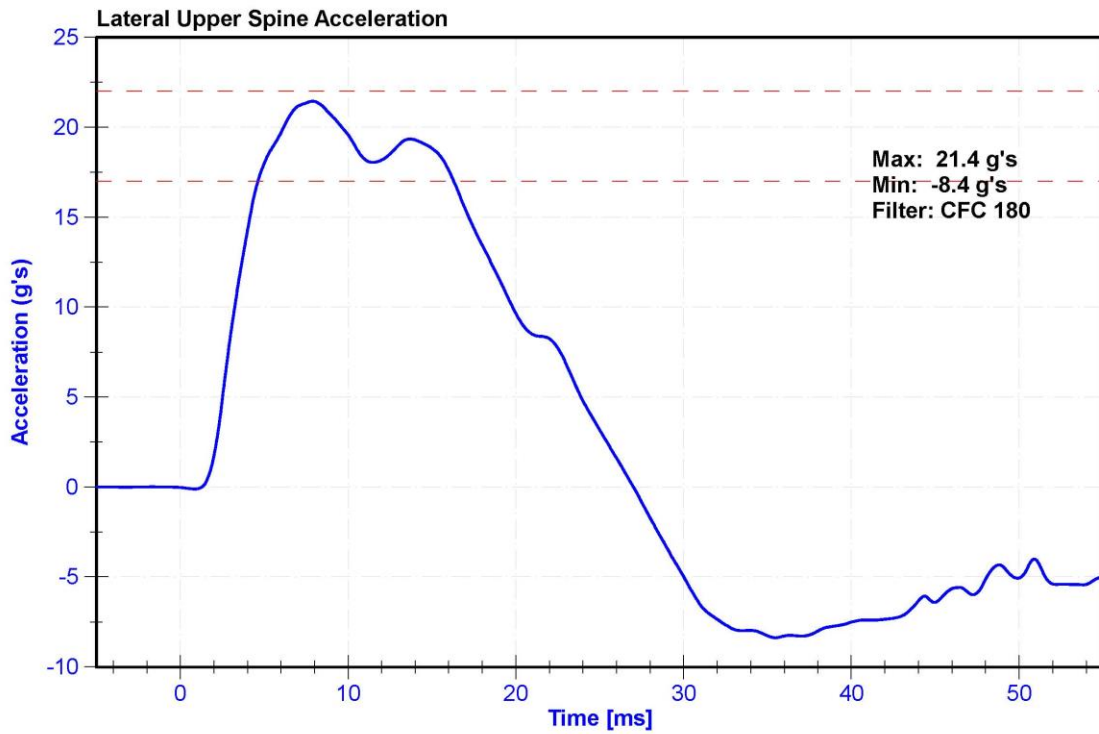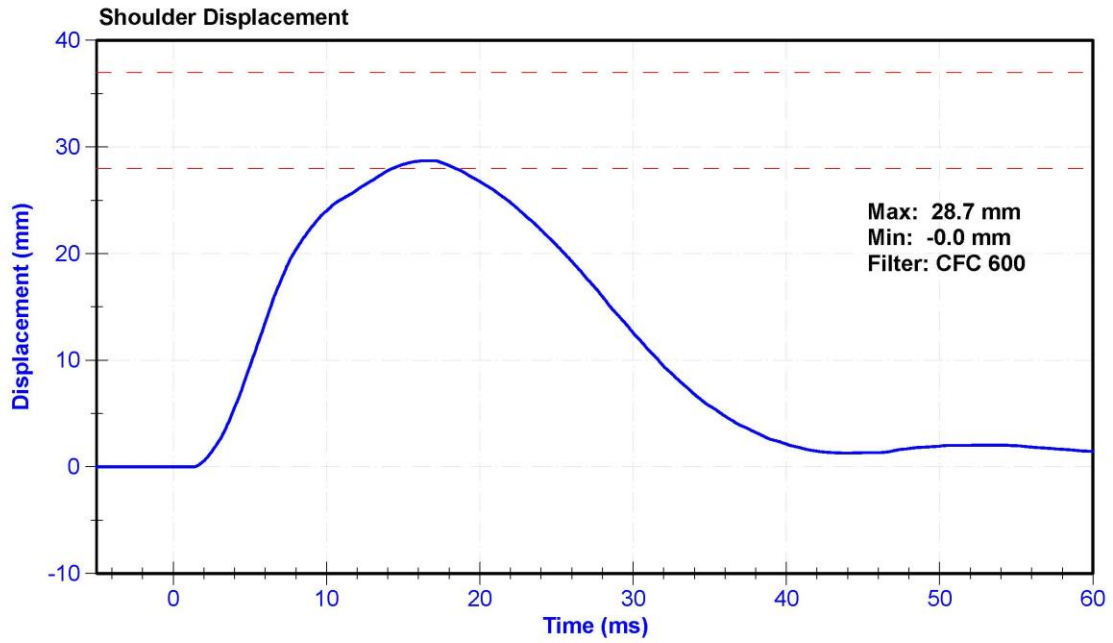


ATD Manufacturer	FTSS	Test Technician	D. Reinhard
ATD Serial Number	DG8012	Laboratory Supervisor	K. Brogan



**Results**


Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	20.7	Pass
Humidity	10	70	%	22.0	Pass
Velocity	4.2	4.4	m/s	4.29	Pass
Probe Acceleration	12	16	g's	15.1	Pass
Lateral Lower Spine Acceleration	9	14	g's	10.5	Pass
Upper Abdomen Rib Deflection	36	47	mm	40.9	Pass
Lower Abdomen Rib Deflection	33	44	mm	39.4	Pass

**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Probe Accelerometer	MSI 64C-2000	A286228	1/29/2020	1/28/2021
Lower Spine Y Accelerometer	ENDEVCO 7264C	AC-P51327	11/5/2020	5/6/2021
Upper Abdomen Rib Potentiometer	Servo 08TC1-3725	DS-008GFE	11/6/2020	5/7/2021
Lower Abdomen Rib Potentiometer	Servo 08TC1-3745	DS-1774GFE	11/6/2020	5/7/2021

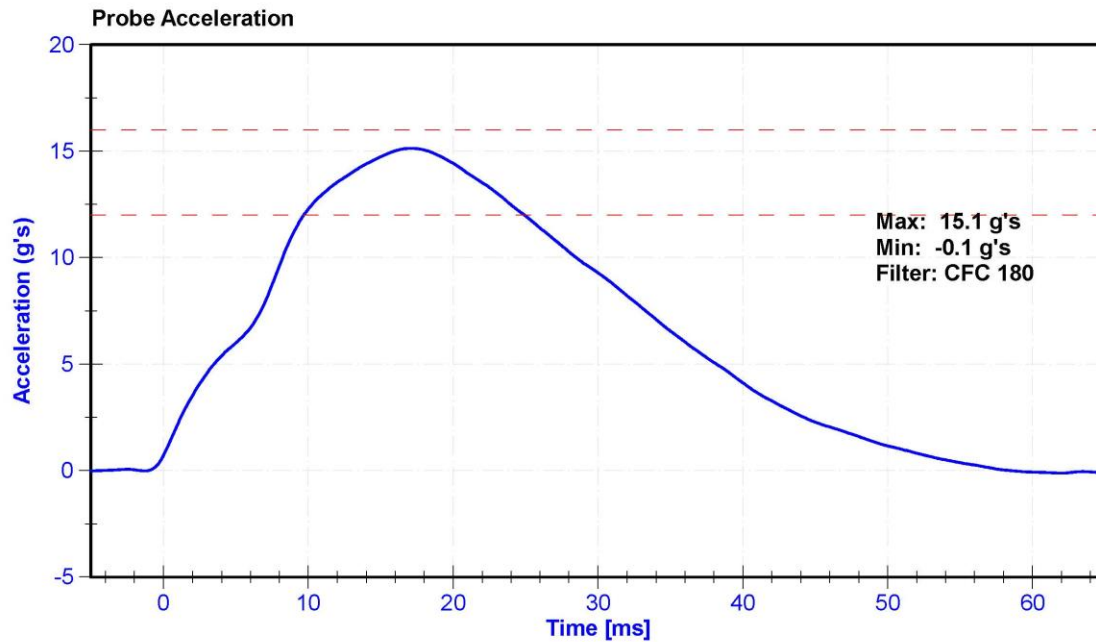

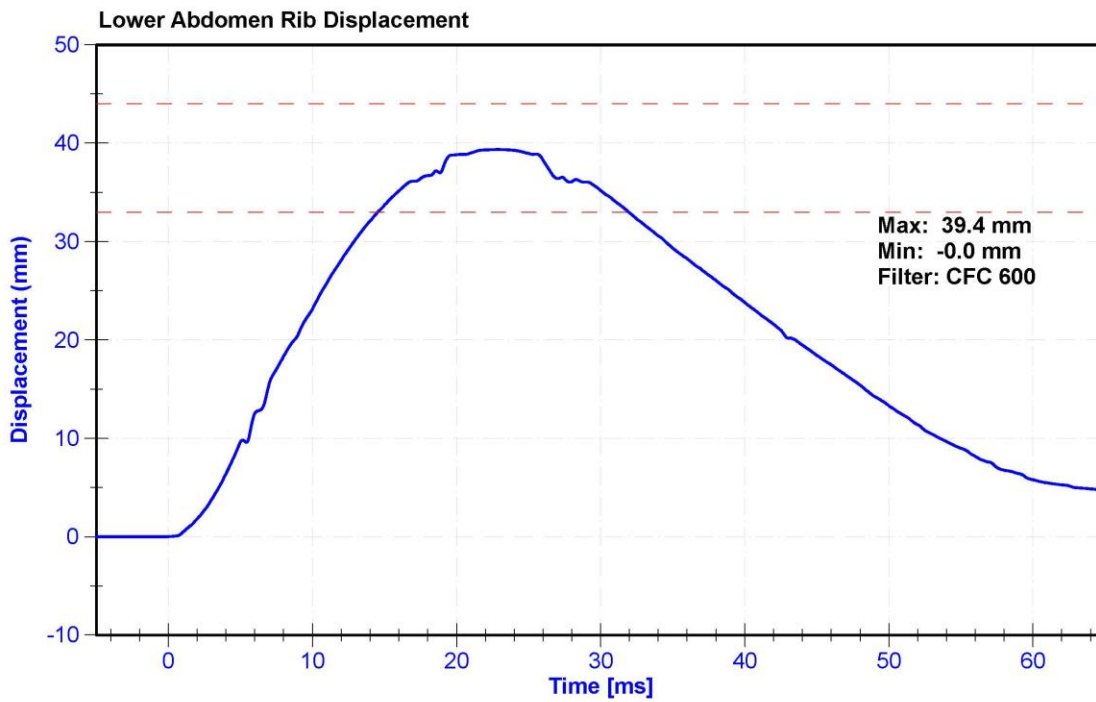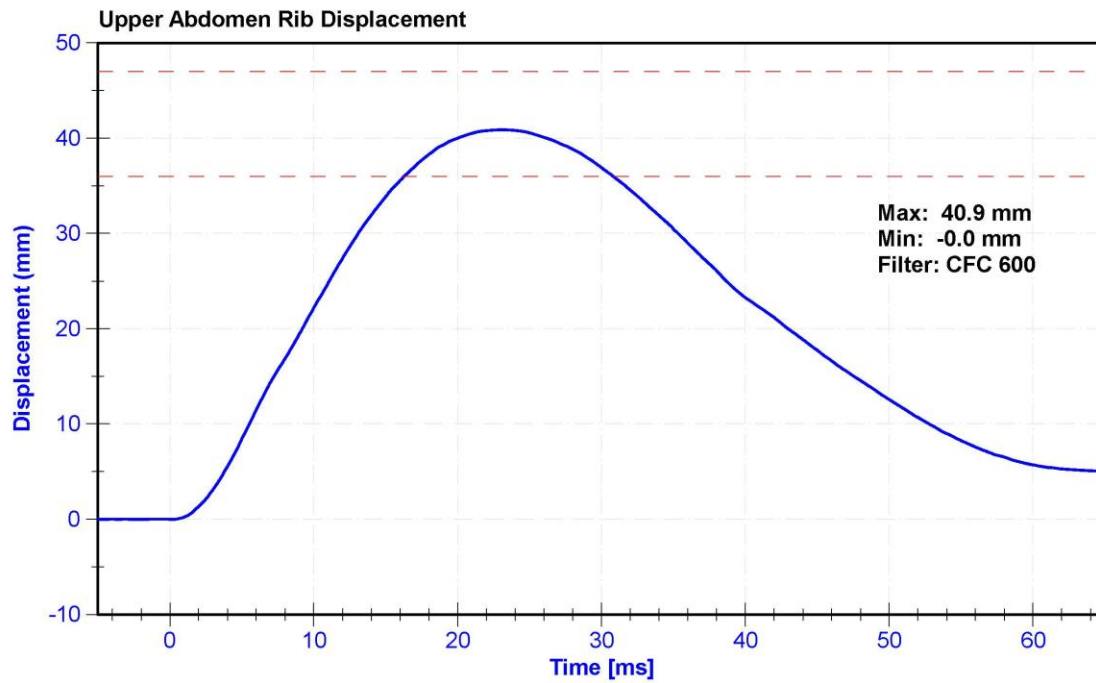

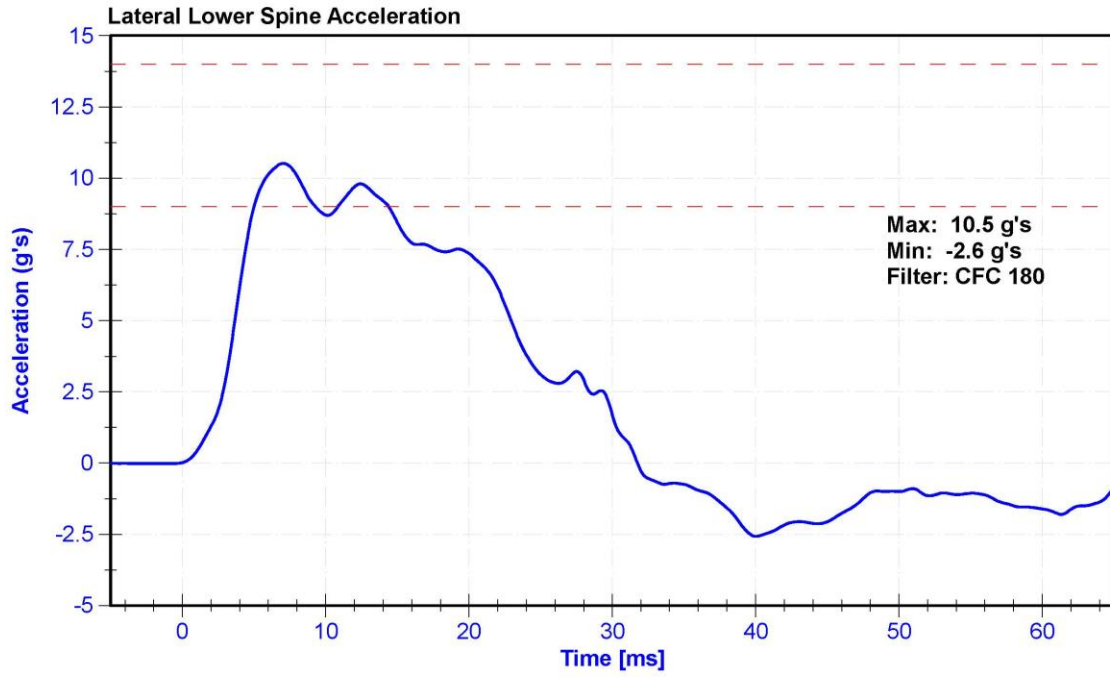


ATD Manufacturer	FTSS	Test Technician	D.Reinhard
ATD Serial Number	DG8012	Laboratory Supervisor	K. Brogan




**Results**



Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	20.7	Pass
Humidity	10	70	%	22	Pass
Velocity	4.2	4.4	m/s	4.27	Pass
Probe Acceleration	14	18	g's	16.5	Pass
Lateral Upper Spine Acceleration	13	17	g's	14.9	Pass
Lateral Lower Spine Acceleration	7	11	g's	9.3	Pass
Upper Thorax Rib Deflection	32	40	mm	35.2	Pass
Middle Thorax Rib Deflection	39	45	mm	39.8	Pass
Lower Thorax Rib Deflection	35	43	mm	37.5	Pass

**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	MSI 64C-2000	A286228	1/29/2020	1/28/2021
Upper Spine Y Accelerometer	ENDEVCO 7264CT	AC-P64148	11/5/2020	5/6/2021
Lower Spine Y Accelerometer	ENDEVCO 7264C	AC-P51327	11/5/2020	5/6/2021
Upper Thorax Rib Potentiometer	Servo 1246	DS-2165GFE	11/6/2020	5/7/2021
Middle Thorax Rib Potentiometer	Servo 08TC1-3621	DS-45 GFE	11/6/2020	5/7/2021
Lower Thorax Rib Potentiometer	Servo 08TC1-3787	DS-011GFE	11/6/2020	5/7/2021

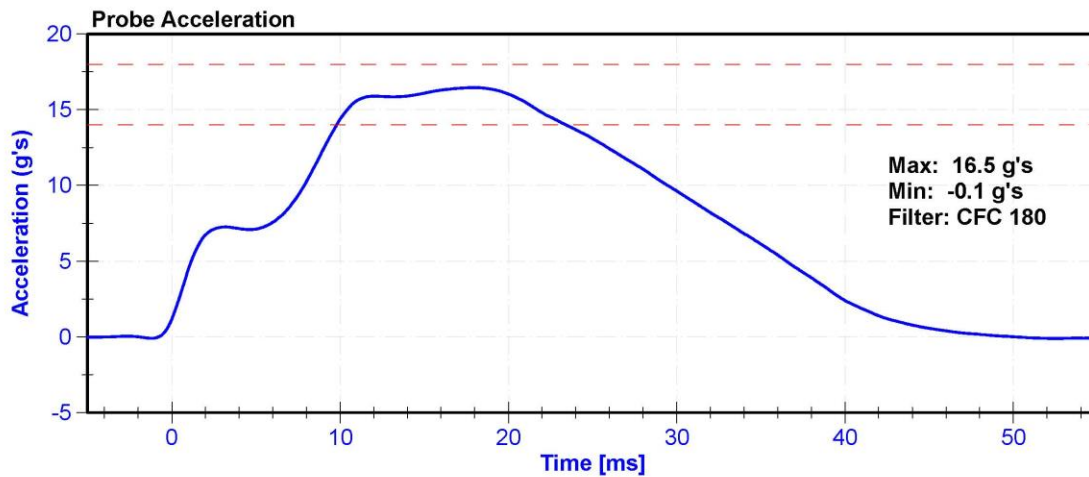

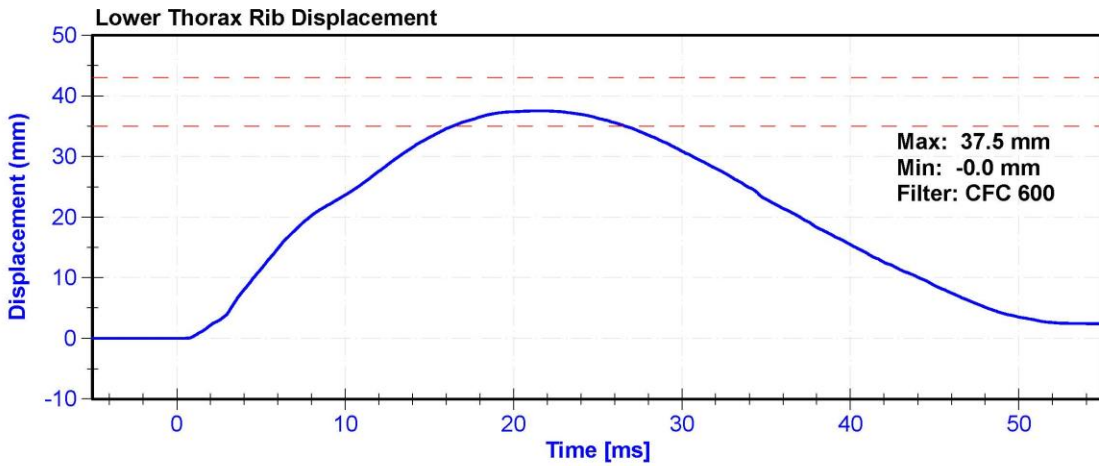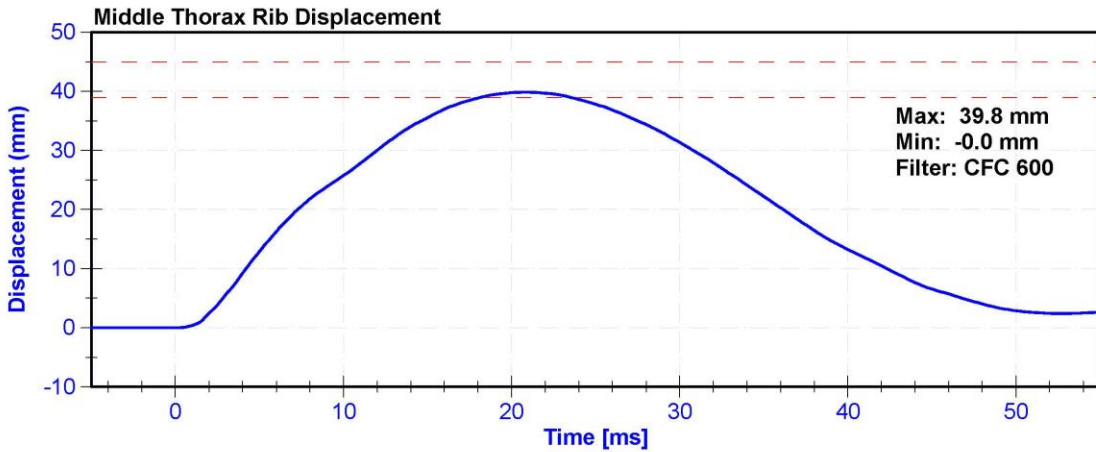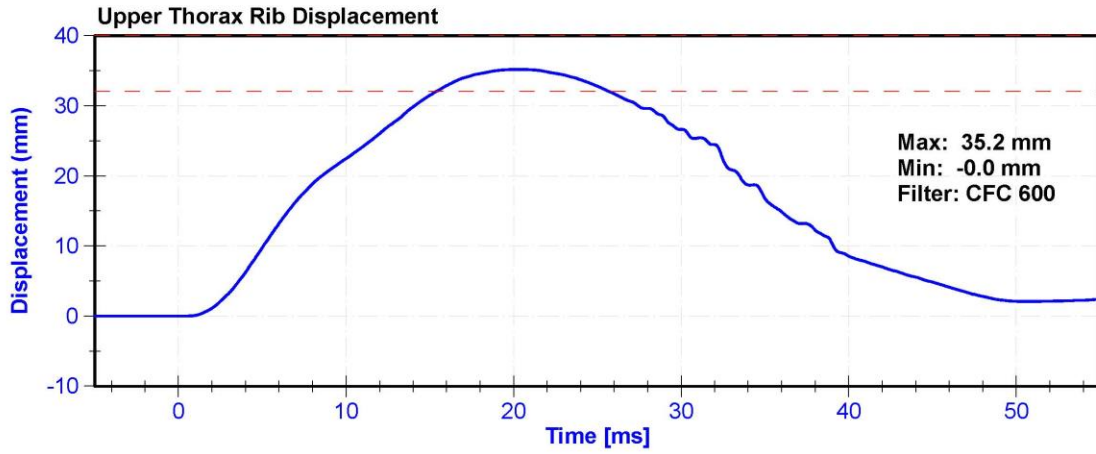

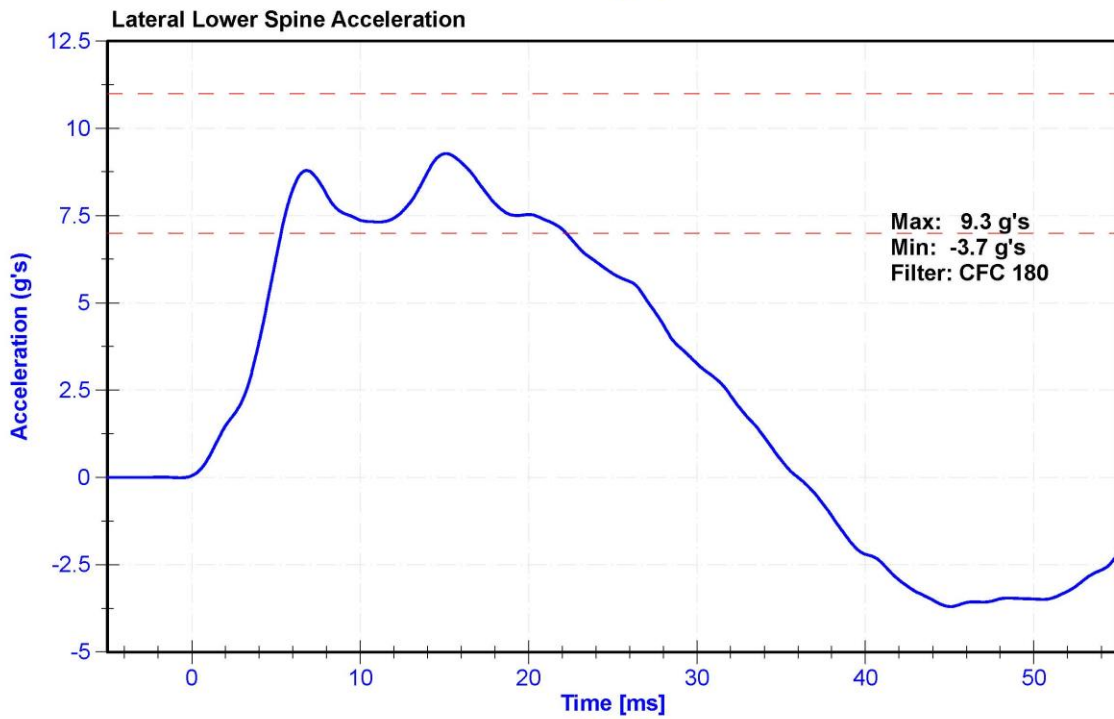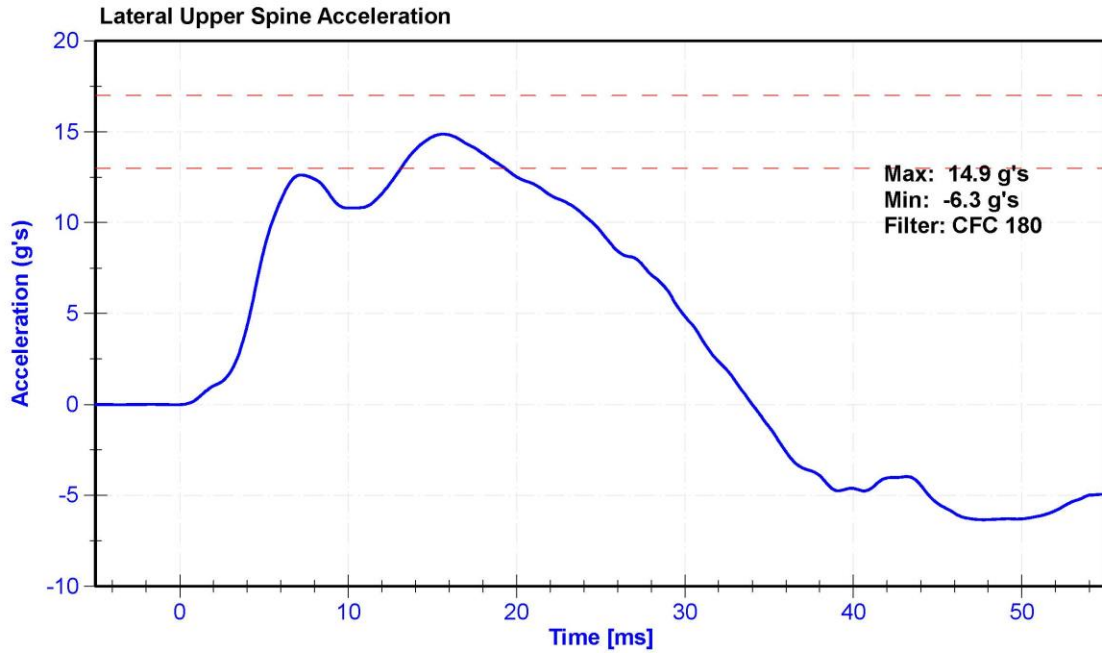


ATD Manufacturer	FTSS	Test Technician	D. Reinhard
ATD Serial Number	DG8012	Laboratory Supervisor	K. Brogan

**Results**



Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	20.7	Pass
Humidity	10	70	%	22.0	Pass
Velocity	4.2	4.4	m/s	4.29	Pass
Probe Acceleration	12	16	g's	15.1	Pass
Lateral Lower Spine Acceleration	9	14	g's	10.5	Pass
Upper Abdomen Rib Deflection	36	47	mm	40.9	Pass
Lower Abdomen Rib Deflection	33	44	mm	39.4	Pass


**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Probe Accelerometer	MSI 64C-2000	A286228	1/29/2020	1/28/2021
Lower Spine Y Accelerometer	ENDEVCO 7264C	AC-P51327	11/5/2020	5/6/2021
Upper Abdomen Rib Potentiometer	Servo 08TC1-3725	DS-008GFE	11/6/2020	5/7/2021
Lower Abdomen Rib Potentiometer	Servo 08TC1-3745	DS-1774GFE	11/6/2020	5/7/2021

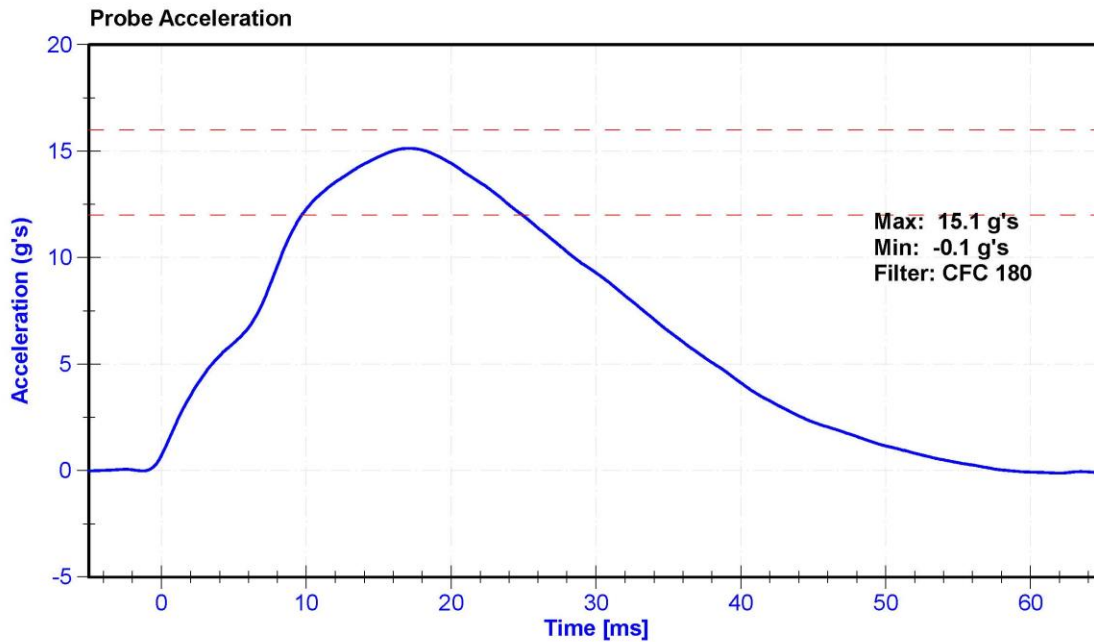



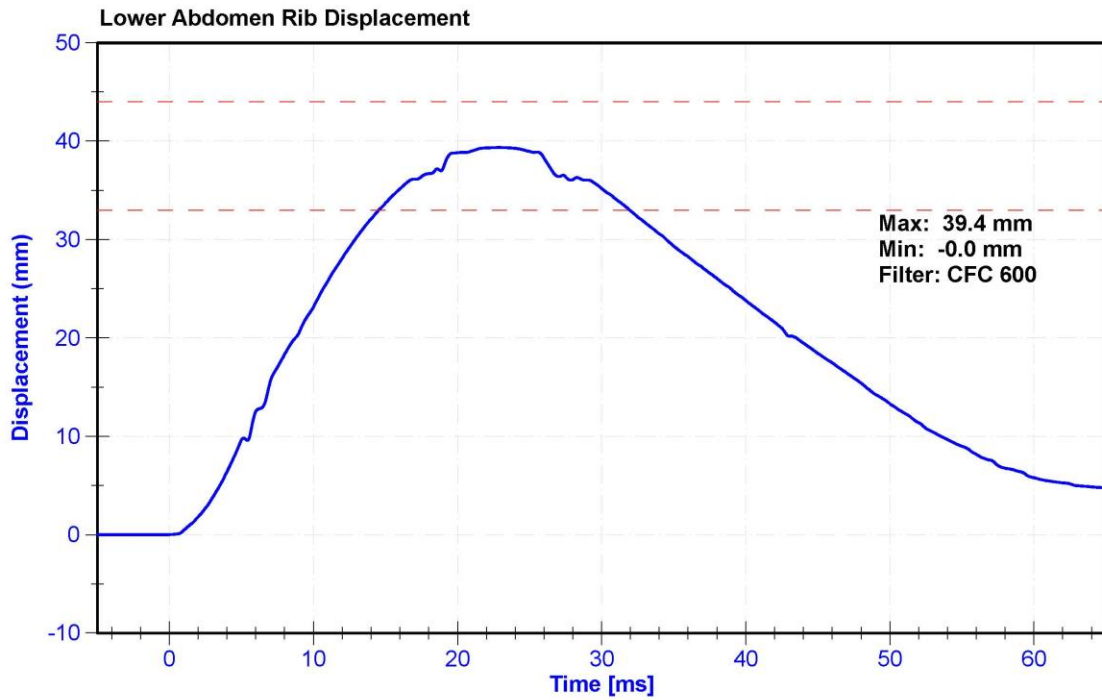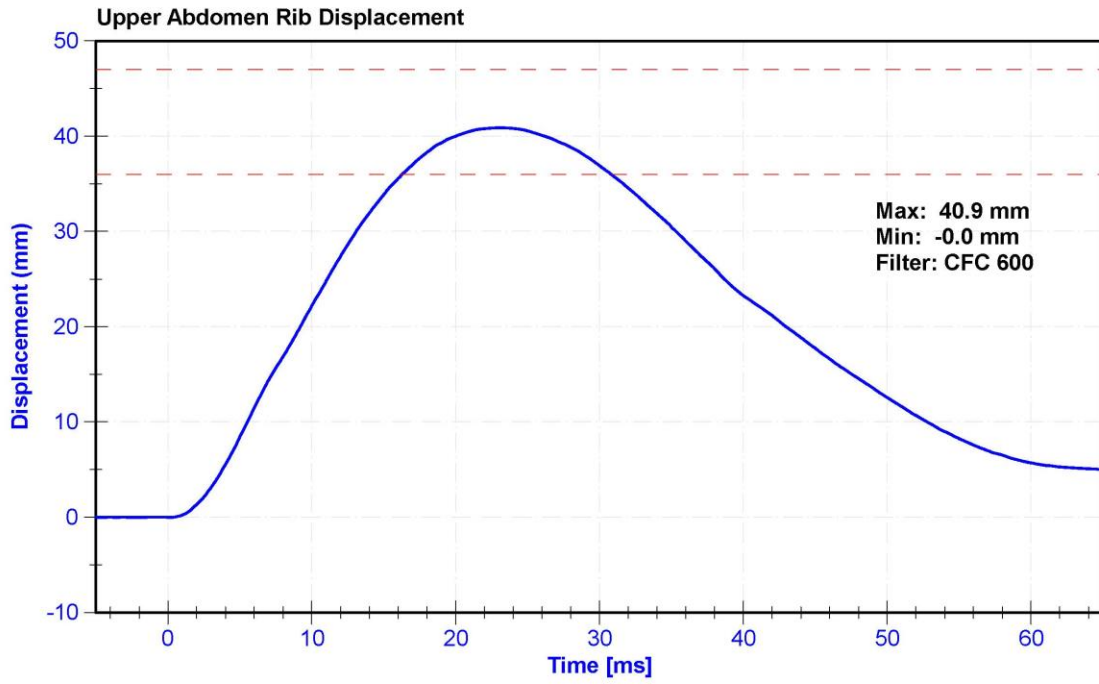

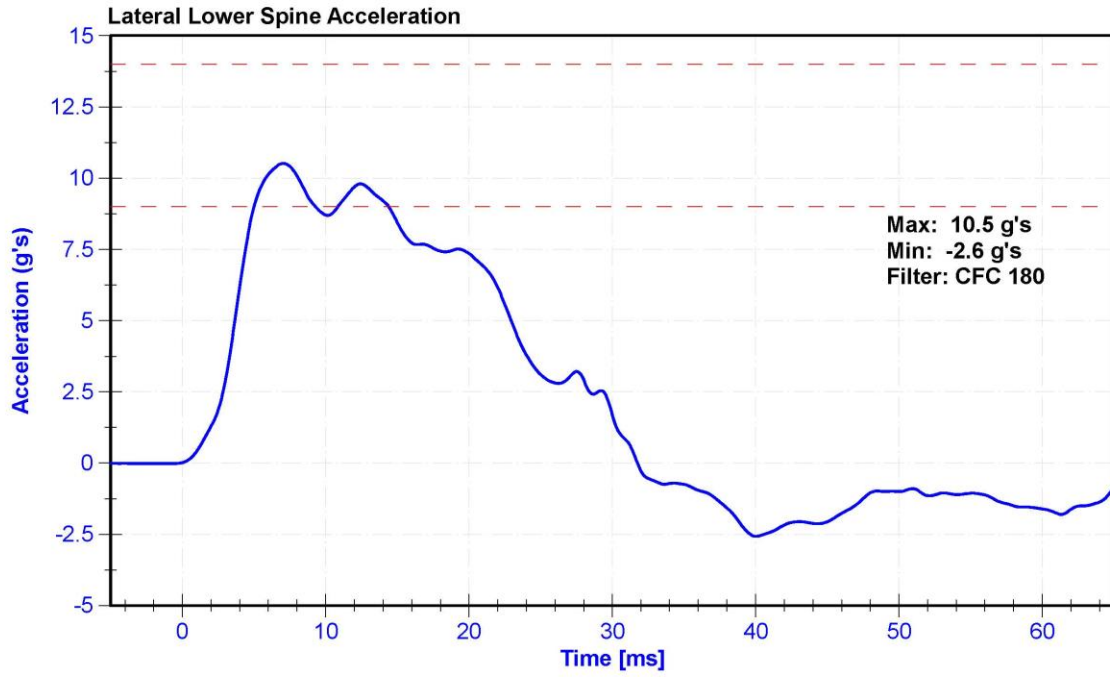


ATD Manufacturer	FTSS	Test Technician	D.Reinhard
ATD Serial Number	DG8012	Laboratory Supervisor	K. Brogan



**Results**

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	20.6	Pass
Humidity	10	70	%	22	Pass
Velocity	6.6	6.8	m/s	6.66	Pass
Probe Acceleration	38	47	g's	45.0	Pass
Lateral Pelvis Acceleration after 6ms	34	42	g's	41.9	Pass
Acetabulum Force	3600	4300	N	3990.9	Pass

**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	MSI 64C-2000	A286228	1/29/2020	1/28/2021
Pelvis Y Accelerometer	ENDEVCO 7264C	AC-P51875	11/5/2020	5/6/2021
Acetabulum Load Cell	Denton 3249J	LC-267Fy	3/19/2020	3/19/2021
Certification Plug	SACO	13496	9/23/2019	N/A
Crash Test Plug	SACO	13481	9/23/2019	N/A

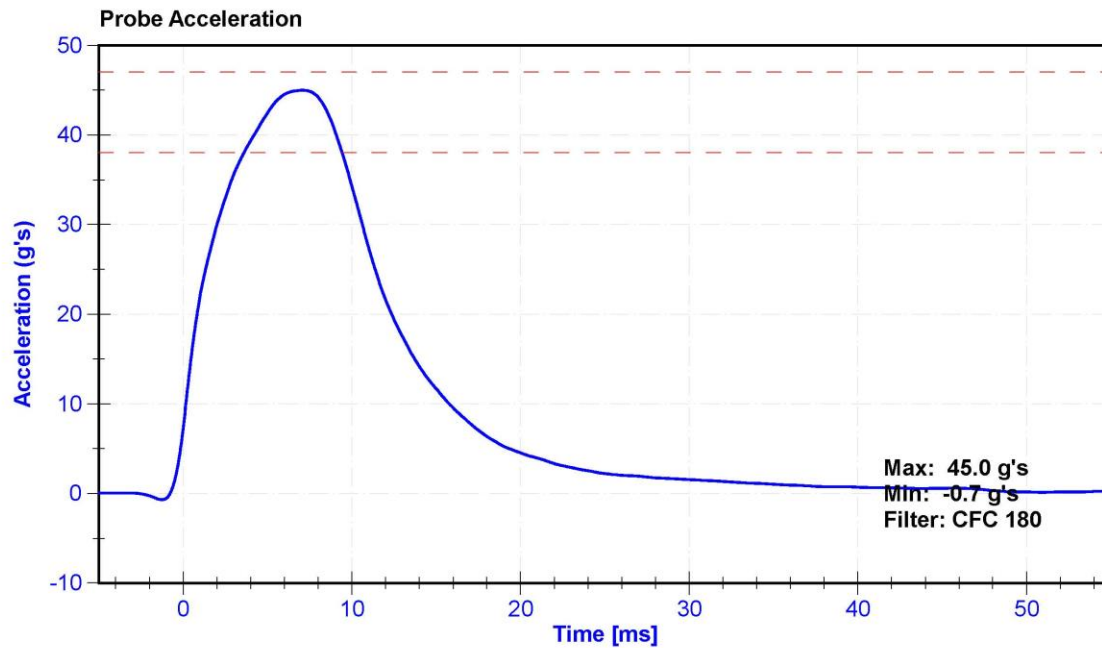

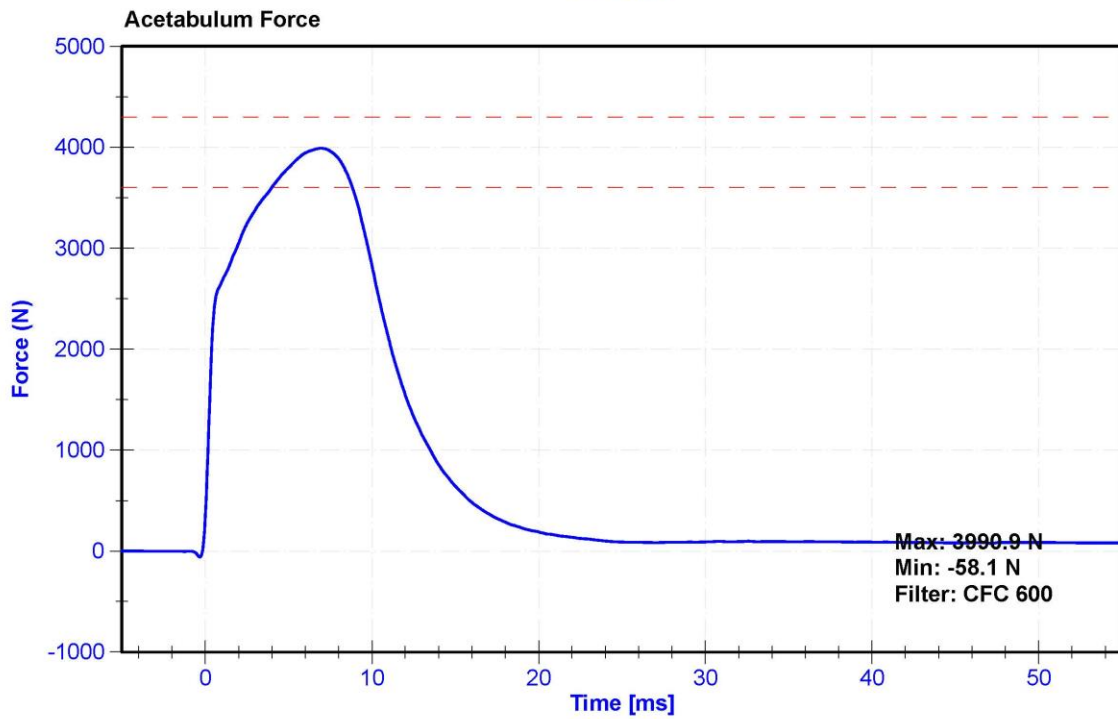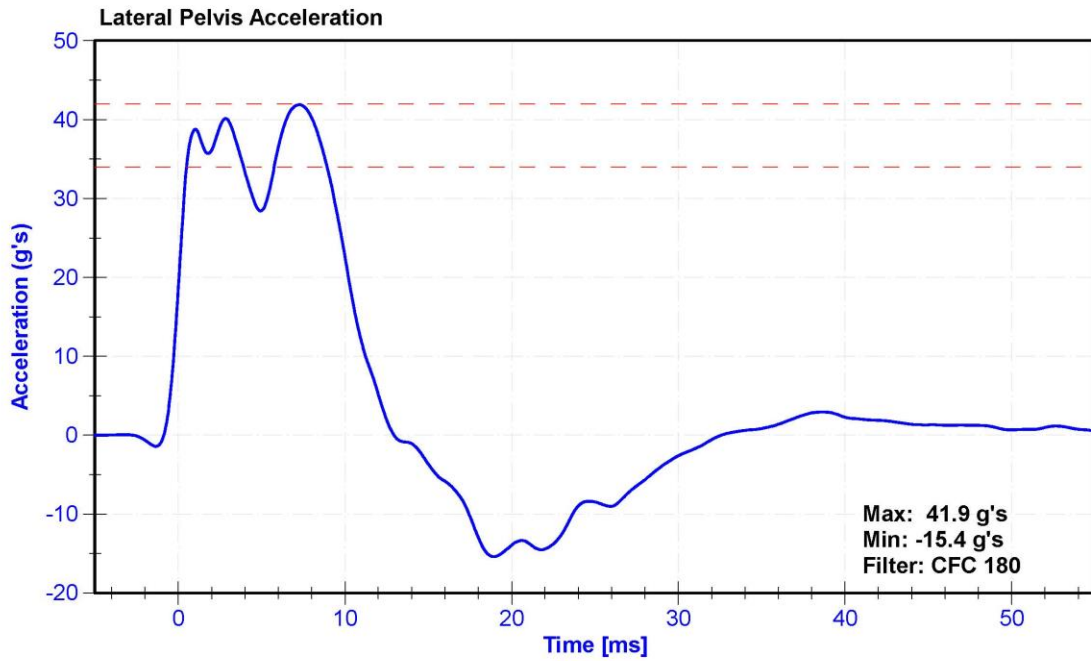



Cash  
DGS012  
12/17


### SID-11s Pelvis Plug Certification Test

Plug S/N 13481  
Test Number 11124  
Report Number 11162  
Test Date 9/23/2019 8:21:15 AM

Force (-N) vs Extension (-mm)

Test Results	Spec Min	Spec Max
Force @ 0.5 mm (N)	50.00	600.00
Force @ 1.5 mm (N)	850.00	1,400.00
Force @ 2.5 mm (N)	1,306.00	1,618.00
Force @ 3.0 mm (N)	1,361.00	1,673.00

Testing Machine STM-20 596554;  
 Load Cell S/N (F1360947), Units (LBS) 1000  
 Crosshead Speed ( mm / min ) or Rate 12.7  
 Extension or Position Measured by XHD\_100 (XHD100)

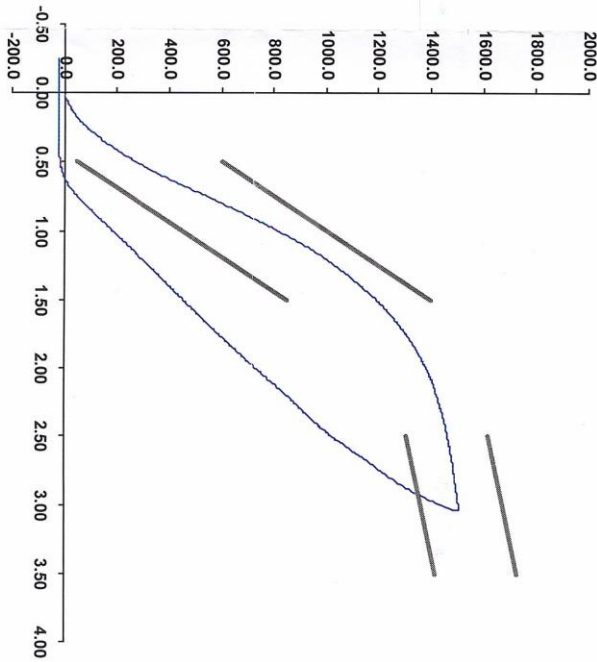

Notes:

Operator \_\_\_\_\_

Part Number 180-4450

Template No 107 23-Sep-19  
 SACO Research

By: \_\_\_\_\_ Date: 9/23/2019  
 SACO Research 41735 Elm St, #401 Murrieta, CA 92562 Tel 310-694-2092 FAX




**SID-11s Pelvis Plug Certification Test**

Plug S/N 13496  
 Test Number 11139  
 Report Number 11177  
 Test Date 9/23/2019 8:48:55 AM

Test Results	Spec Min	Spec Max
Force @ 0.5 mm (N)	50.00	600.00
Force @ 1.5 mm (N)	850.00	1,400.00
Force @ 2.5 mm (N)	1,306.00	1,618.00
Force @ 3.0 mm (N)	1,361.00	1,673.00

Testing Machine STM-20 596554;  
 Load Cell S/N (F1360947), Units (LBS) 1000  
 Crosshead Speed (mm / min) or Rate 12.7  
 Extension or Position Measured by XHD\_100 (XHD100)  
 Notes:

*CERT 3*  
*068012*  
*12/17/2020*  
 Force (-N) vs Extension (-mm)

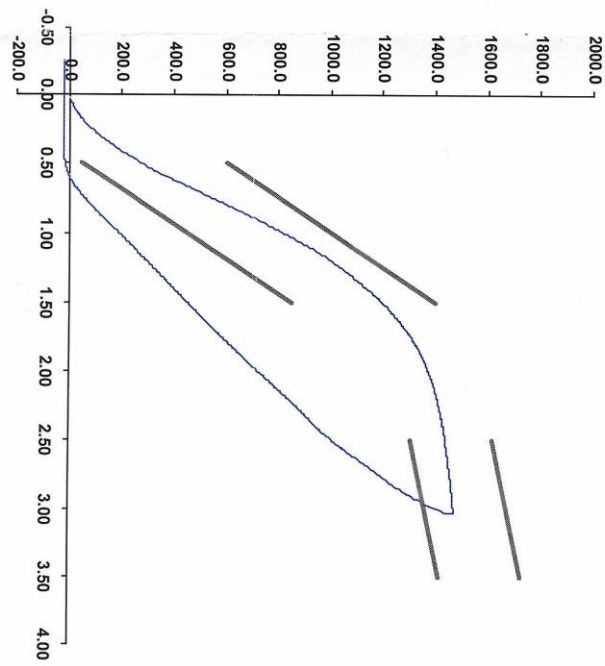

Operator \_\_\_\_\_  
 Part Number 180-4450

Template No 107 23-Sep-19  
 SACO Research  
 By: *DC* Date: *9/23/2019*  
 SACO Research 41735 Elm St, #401 Murrieta, CA 92562 Tel 310-694-2082 FAX



Non Impact  
D68012  
8/17/20


### SID-IIs Pelvis Plug Certification Test

Plug S/N 13475  
Test Number 11118  
Report Number 11156  
Test Date 9/23/2019 8:10:14 AM

Force (-N) vs Extension (-mm)

Test Results	Spec Min	Spec Max
Force @ 0.5 mm (N)	50.00	600.00
Force @ 1.5 mm (N)	850.00	1,400.00
Force @ 2.5 mm (N)	1,306.00	1,618.00
Force @ 3.0 mm (N)	1,564.75	1,673.00

Testing Machine STM-20 596554;  
Load Cell S/N (F1360947), Units (LBS) 1000  
Crosshead Speed ( mm / min ) or Rate 12.7  
Extension or Position Measured by XHD\_100 ( XHD100 )

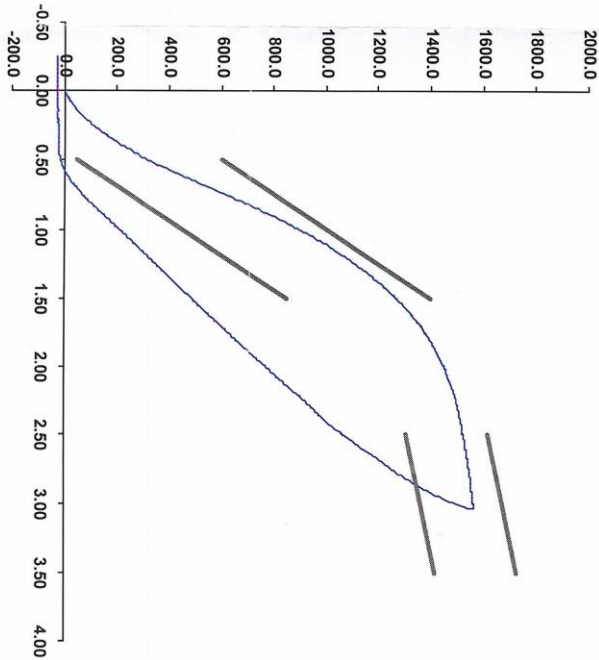

Notes:

Operator

Part Number 180-4450

Template No 107 23-Sep-19  
SACO Research

By: *DC* Date: 9/23/2019  
SACO Research 41735 Elm St, #401 Murrieta, CA 92562 Tel 310-694-2082 FAX


ATD Manufacturer	FTSS	Test Technician	D.Reinhard
ATD Serial Number	DG8012	Laboratory Supervisor	K. Brogan

**Results**



Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	20.8	Pass
Humidity	10	70	%	19.0	Pass
Velocity	4.2	4.4	m/s	4.37	Pass
Probe Acceleration	36	45	g's	38.7	Pass
Lateral Pelvis Acceleration	28	39	g's	31.5	Pass
Iliac Force	4100	5100	N	4286.7	Pass

**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	MSI 64C-2000	A286228	1/29/2020	1/28/2021
Pelvis Y Accelerometer	ENDEVCO 7264C	AC-P51875	11/5/2020	5/6/2021
Iliac Load Cell	DENTON 3228J	LC-290Fy	11/16/2020	11/16/2021

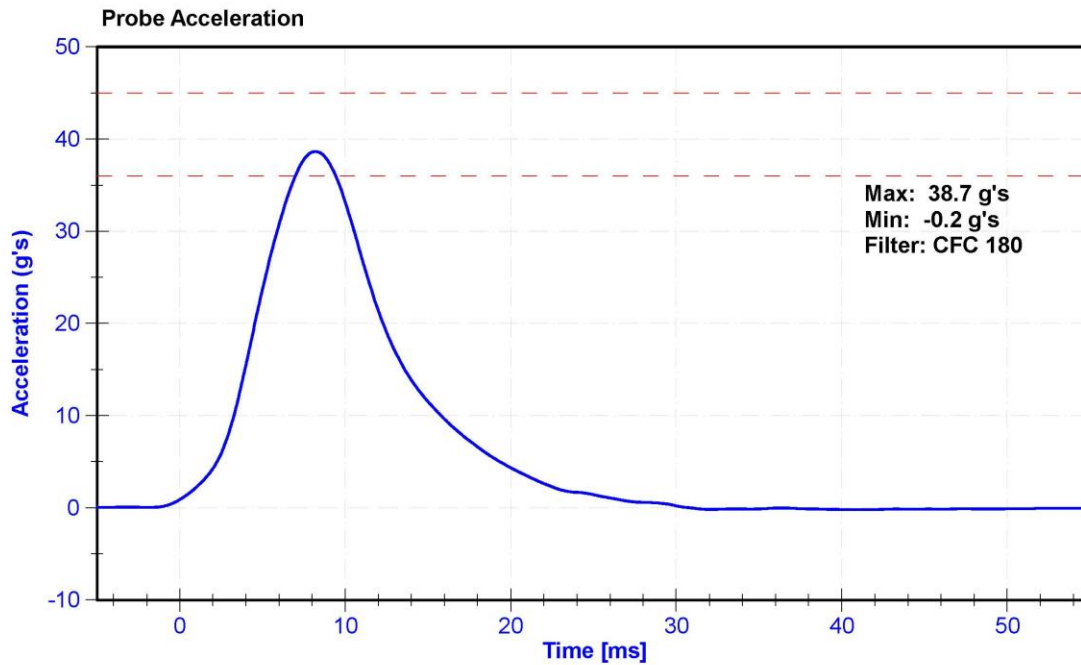



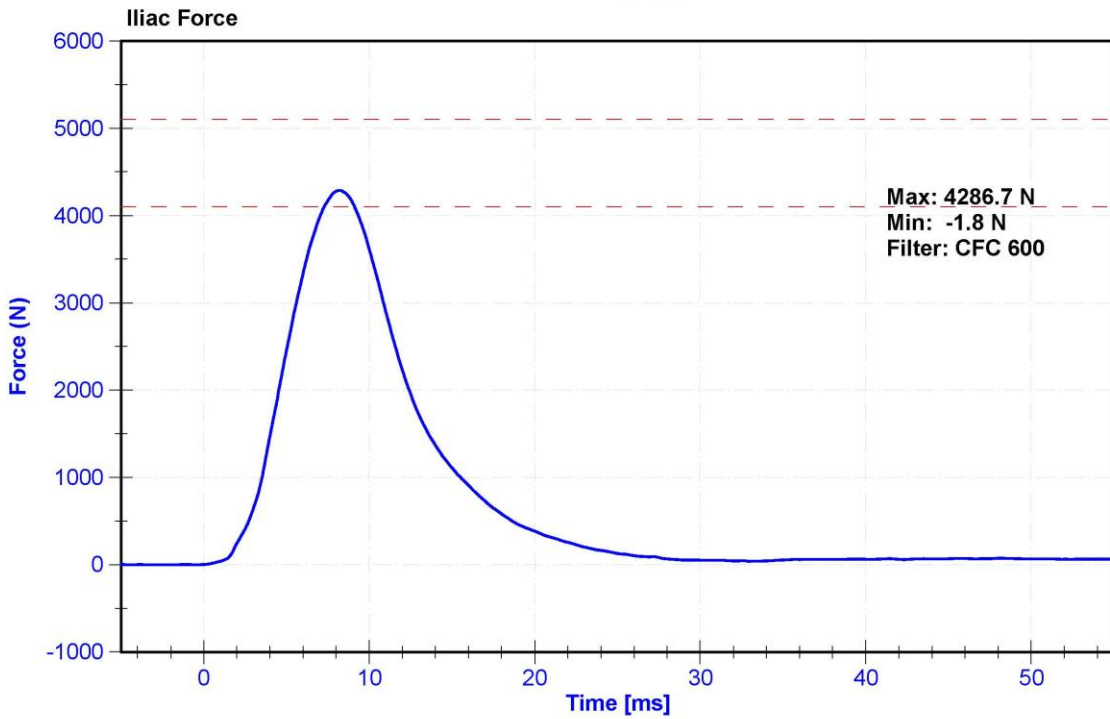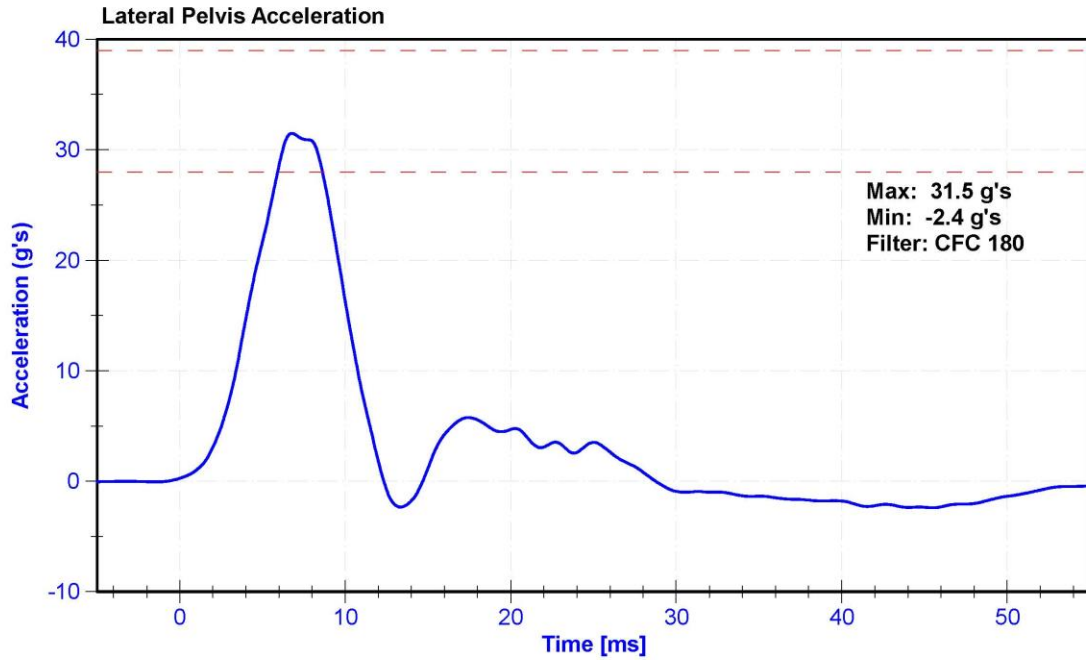

**CALIBRATION TEST RESULTS**

**POST-TEST**

**EUROSID 2 (ES-2RE) MALE – DRIVER ATD**

**SERIAL NO: F033**

**(CONFIGURED FOR LEFT SIDE IMPACT)**




External Measurements - EuroSID-2re


Technician: K. Dutton

Date: 1/6/2021

Dummy Serial Number: F033

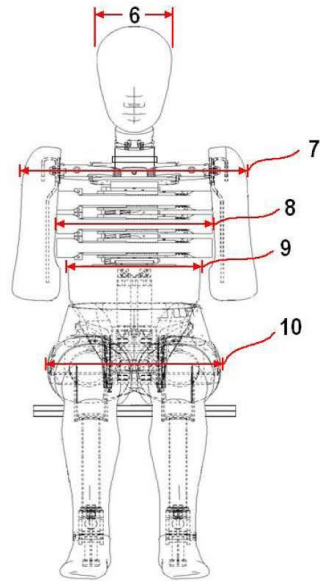

FRONT VIEW

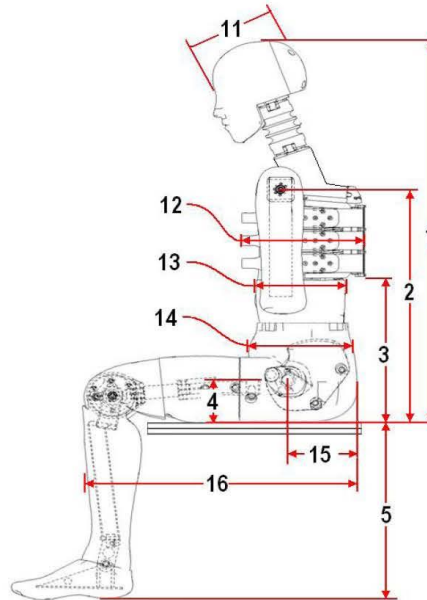

SIDE VIEW

Dim. No.	Description	Specification (mm)		Result (mm)	Pass/Fail
1	Sitting Height	900	918	911	Pass
2	Seat to Shoulder Joint	558	572	569	Pass
3	Seat to Lower Face of Thoracic Spine Box	346	356	352	Pass
4	Seat to Hip Joint (center of bolt)	97	103	100	Pass
5	Sole to Seat, Sitting	333	451	426	Pass
6	Head Width	152	158	154	Pass
7	Shoulder/Arm Width	461	479	472	Pass
8	Thorax Width	322	332	328	Pass
9	Abdomen Width	273	287	285	Pass
10	Pelvis Lap Width	359	373	367	Pass
11	Head Depth	196	206	202	Pass
12	Thorax Depth	262	272	269	Pass
13	Abdomen Depth	194	204	202	Pass
14	Pelvis Depth	235	245	239	Pass
15	Back of Buttocks to Hip Joint (center of bolt)	150	160	155	Pass
16	Back of Buttocks to Front Knee	597	615	609	Pass


ATD Manufacturer	FTSS	Test Technician	S. Vacanti
ATD Serial Number	F033	Laboratory Supervisor	K. Brogan




**Results**

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	20.7	Pass
Humidity	10	70	%	28.0	Pass
Resultant Acceleration	125	155	g's	139.7	Pass
Oscillation	0	15	%	3.13	Pass
Fore-Aft Acceleration	-15	15	g's	13.0	Pass

**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
X Accelerometer	ENDEVCO 7264CT	AC-P63861	11/24/2020	5/25/2021
Y Accelerometer	ENDEVCO 7264CT	AC-P49216	11/24/2020	5/25/2021
Z Accelerometer	ENDEVCO 7264	AC-P51303	11/24/2020	5/25/2021

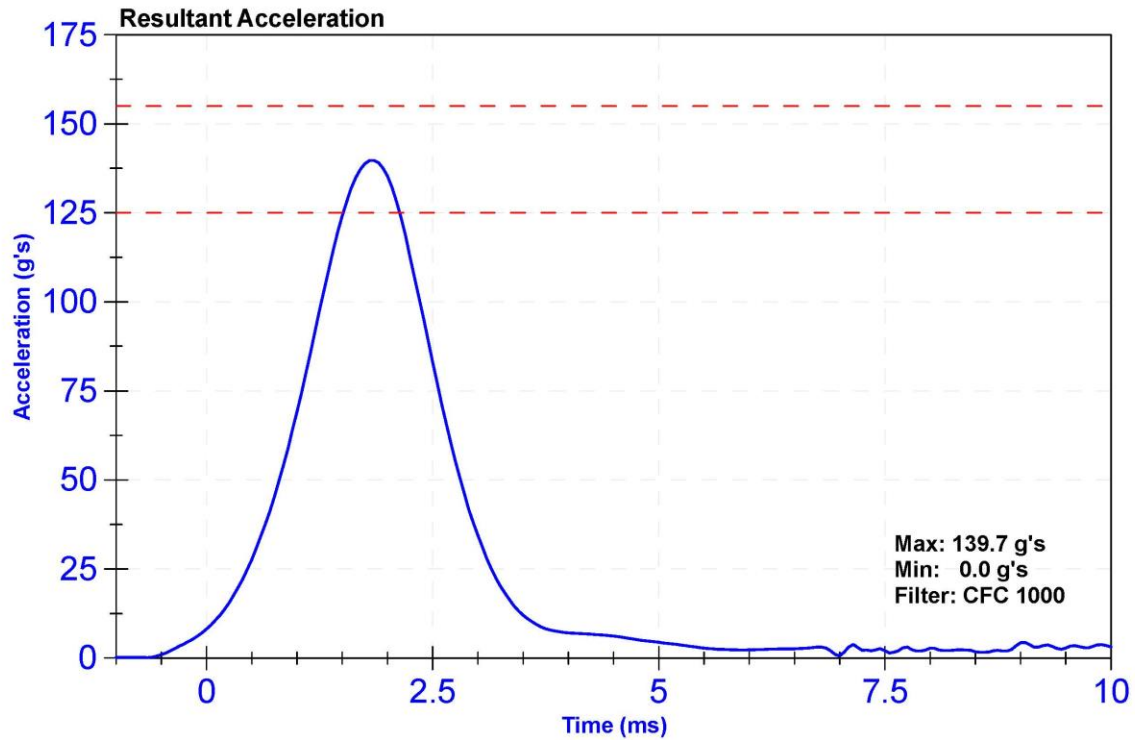

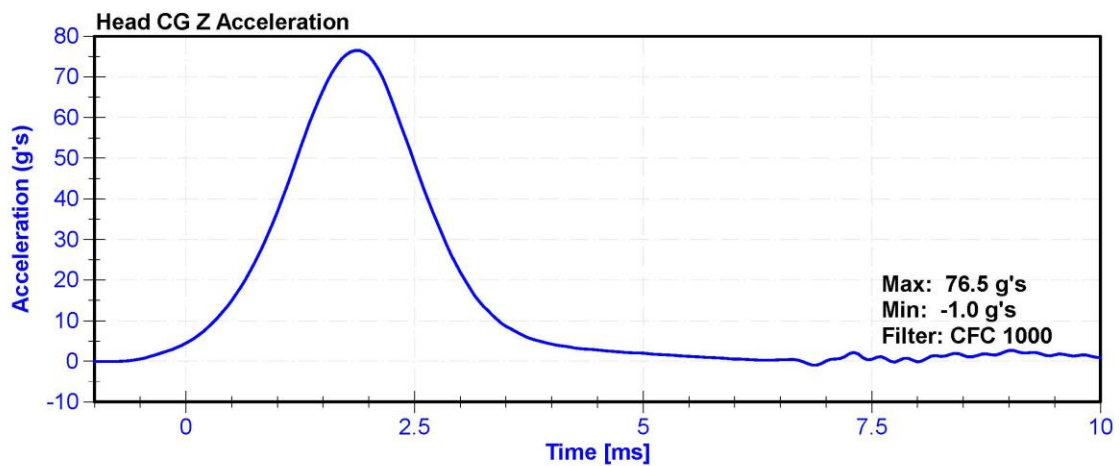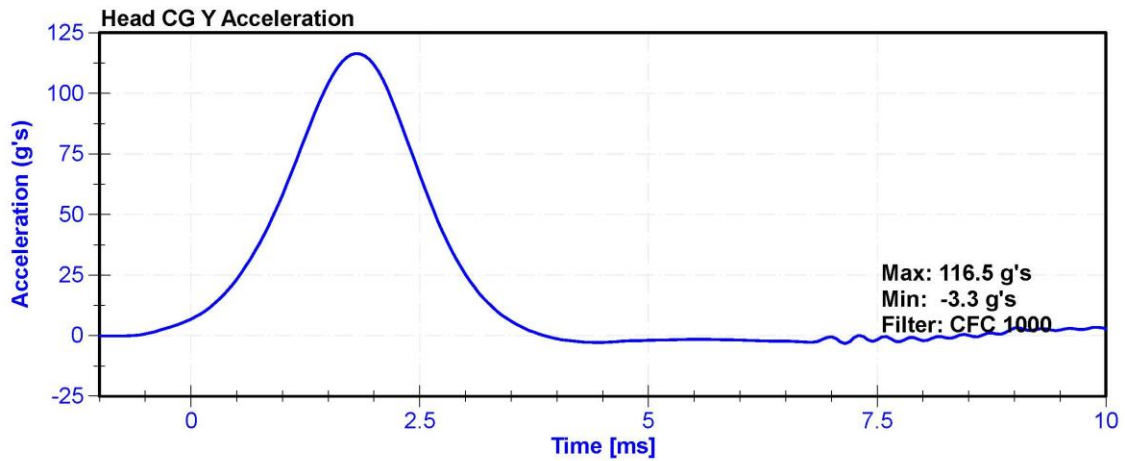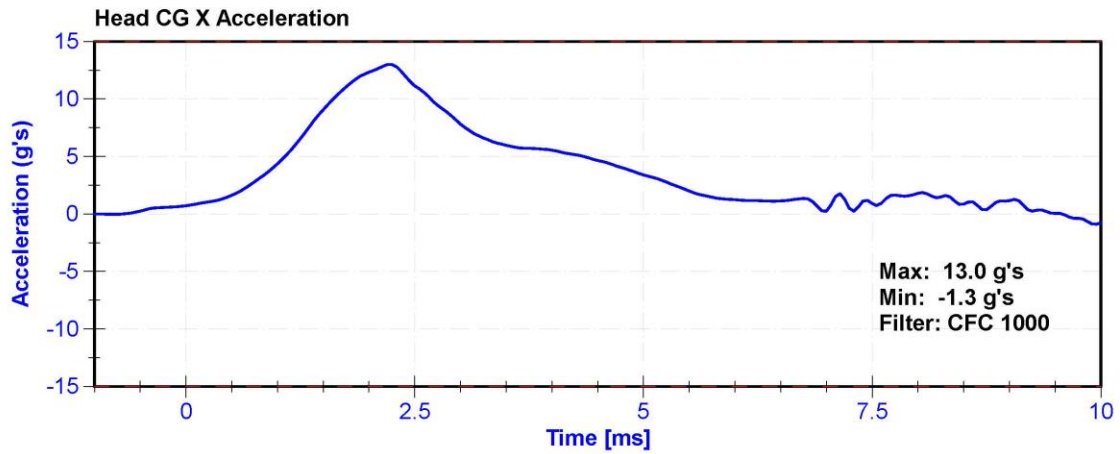


ATD Manufacturer	FTSS	Test Technician	S. Vacanti
ATD Serial Number	F033	Laboratory Supervisor	K. Brogan




**Results**

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21.3	Pass
Humidity	10	70	%	28	Pass
Velocity	3.3	3.5	m/s	3.33	Pass
Lateral Neck Rotation	49	59	deg	50.1	Pass
Time at Maximum Rotation	54	66	ms	57.4	Pass
Time of Rotation Decay from Maximum	53	88	ms	53.7	Pass

**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	ENDEVCO 7231CT	AC16503	2/6/2020	2/5/2021
Front Pendulum Potentiometer	SP22G	DS-094	8/18/2020	8/18/2021
Headform Potentiometer	SP22G	DS-095	8/18/2020	8/18/2021

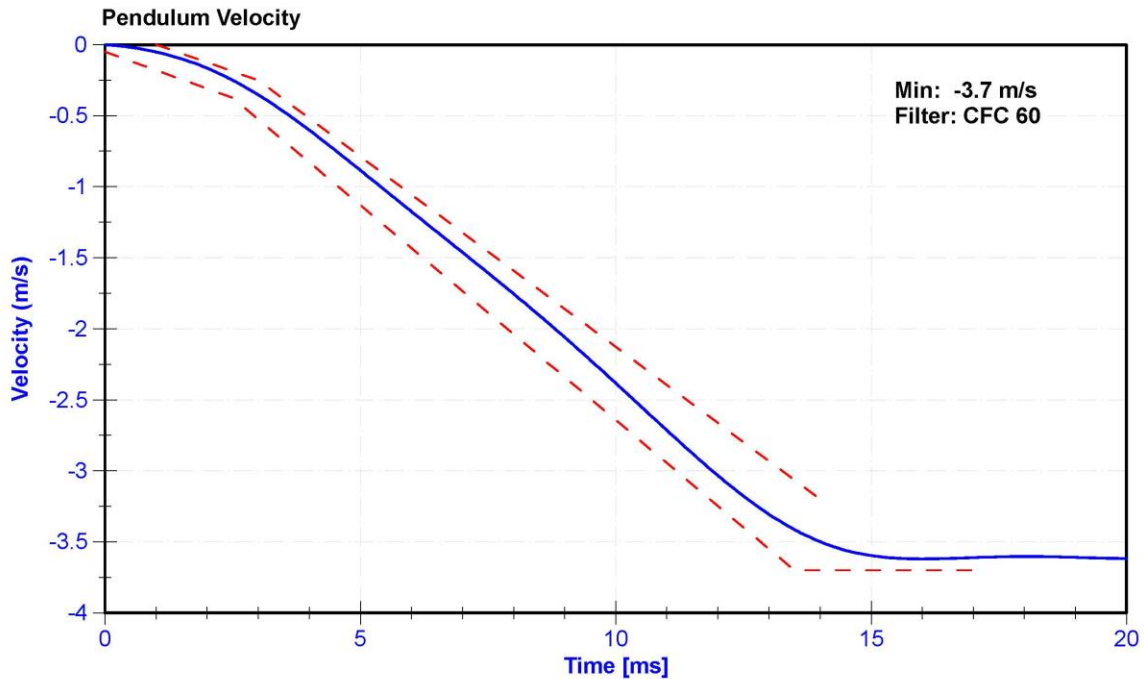

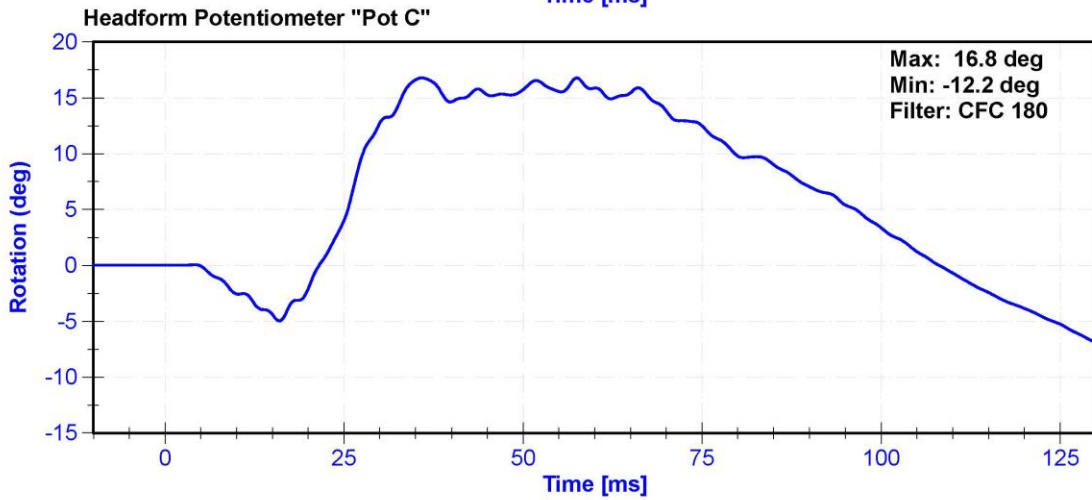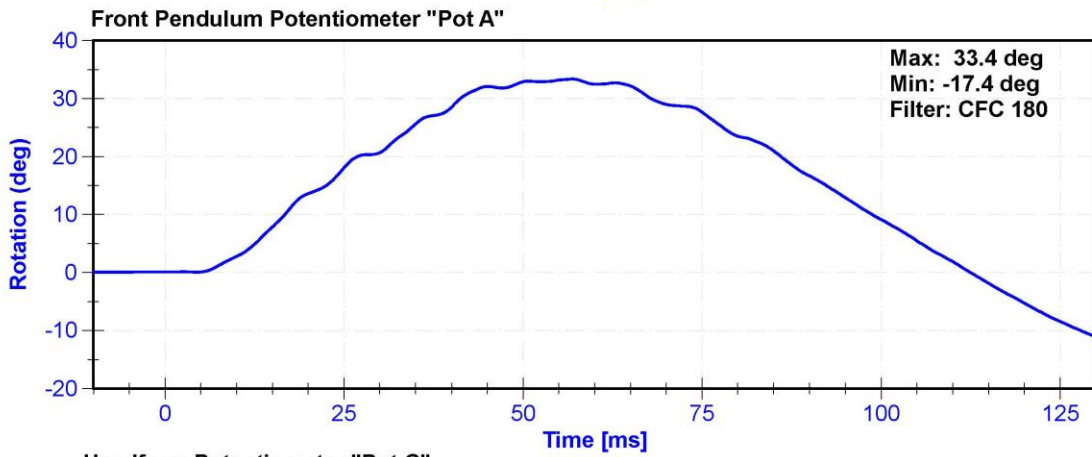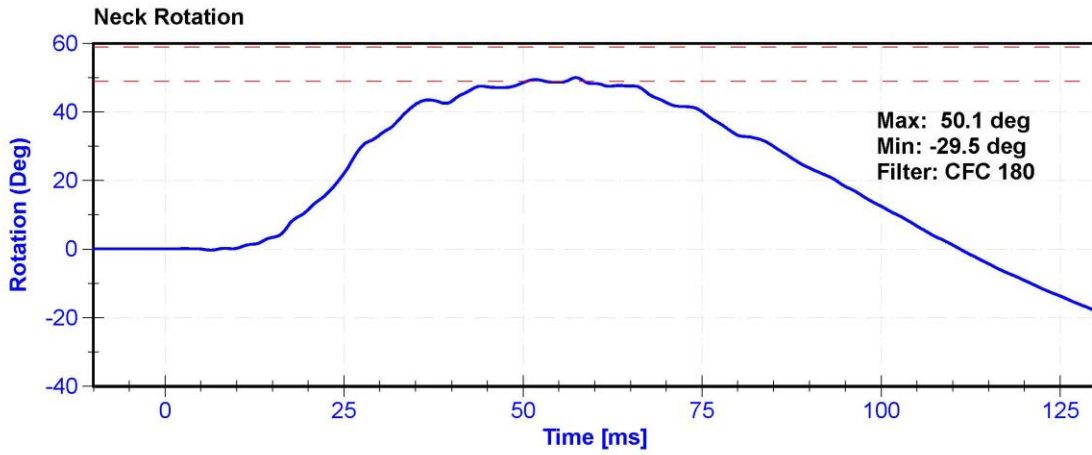


ATD Manufacturer	FTSS	Test Technician	S. Vacanti
ATD Serial Number	F033	Laboratory Supervisor	K. Brogan

**Results**

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	20.9	Pass
Humidity	10	70	%	28.0	Pass
Velocity	4.2	4.4	m/s	4.28	Pass
Probe Acceleration	7.5	10.5	g's	10.49	Pass

**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Probe Accelerometer	MSI 64C-2000	A279031	5/8/2020	5/8/2021

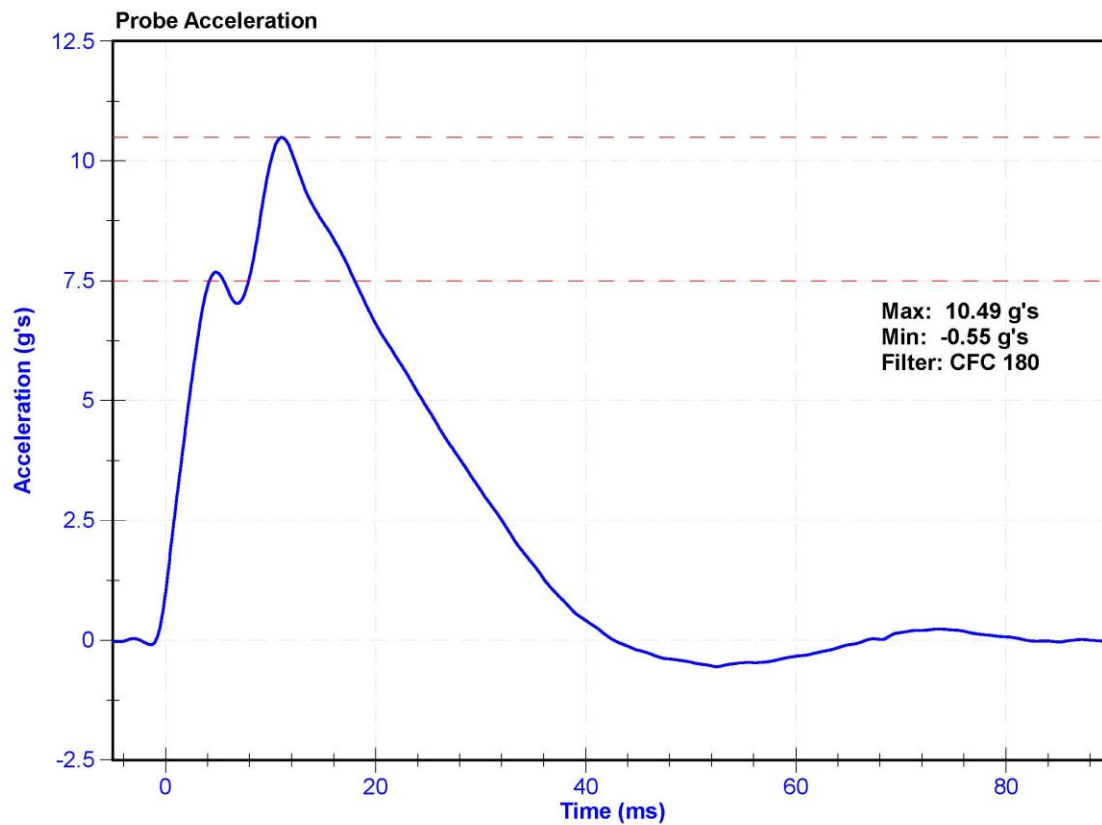




ATD Manufacturer	FTSS	Test Technician	C. Mantell
ATD Serial Number	F033	Laboratory Supervisor	K. Brogan

**Results**

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21.7	Pass
Humidity	10	70	%	32.4	Pass
Rib Displacement	36	40	mm	36.9	Pass

**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Rib Potentiometer	Honeywell MLT-38000203	DS-179GFE	11/25/2020	5/26/2021

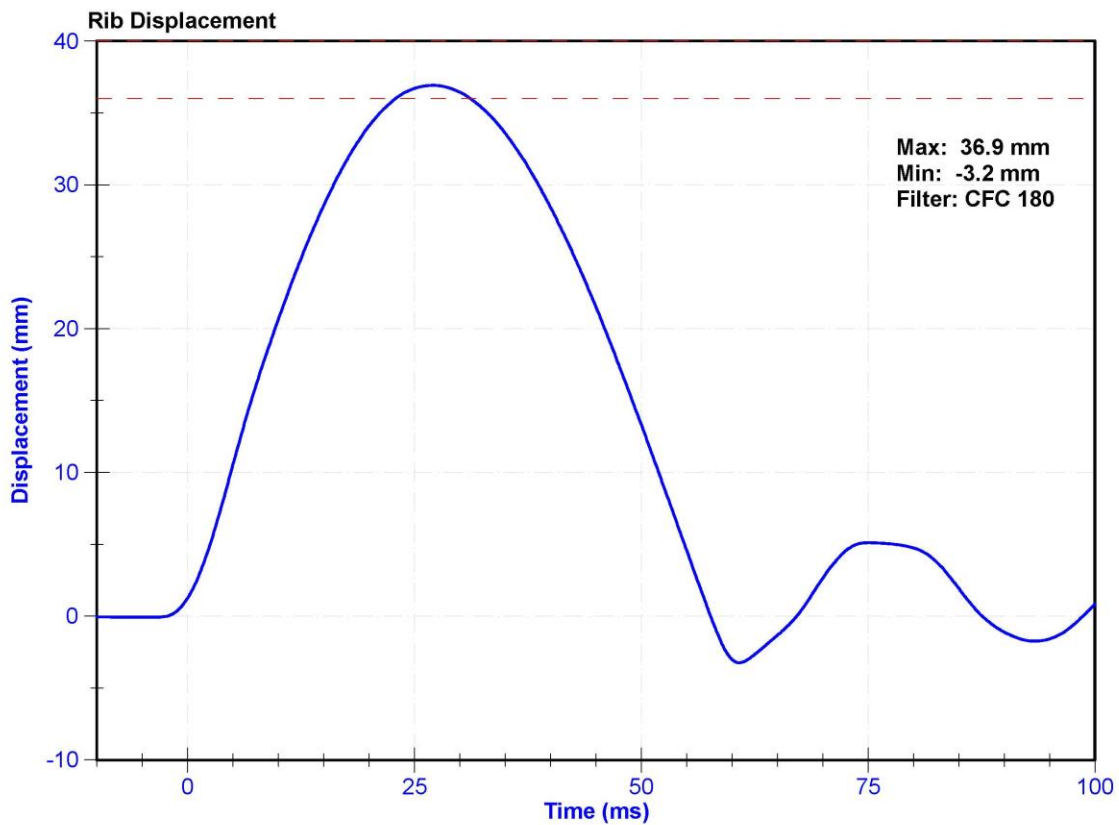


ATD Manufacturer	FTSS	Test Technician	C. Mantell
ATD Serial Number	F033	Laboratory Supervisor	K. Brogan

**Results**

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21.7	Pass
Humidity	10	70	%	32.4	Pass
Rib Displacement	46	51	mm	48.2	Pass

**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Rib Potentiometer	Honeywell MLT-38000203	DS-179GFE	11/25/2020	5/26/2021

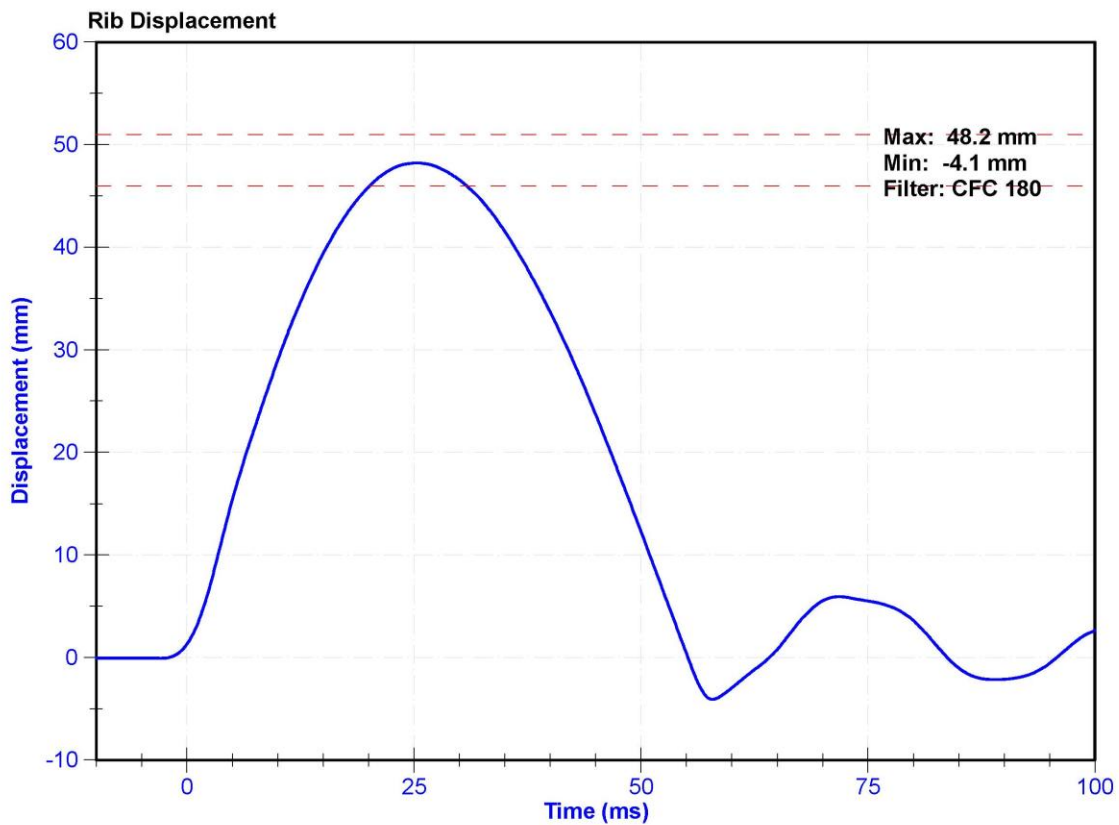


ATD Manufacturer	FTSS	Test Technician	C. Mantell
ATD Serial Number	F033	Laboratory Supervisor	K. Brogan

**Results**

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21.6	Pass
Humidity	10	70	%	33.5	Pass
Rib Displacement	36	40	mm	37.2	Pass

**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Rib Potentiometer	Honeywell MLT-38000203	DS-185GFE	11/25/2020	5/26/2021

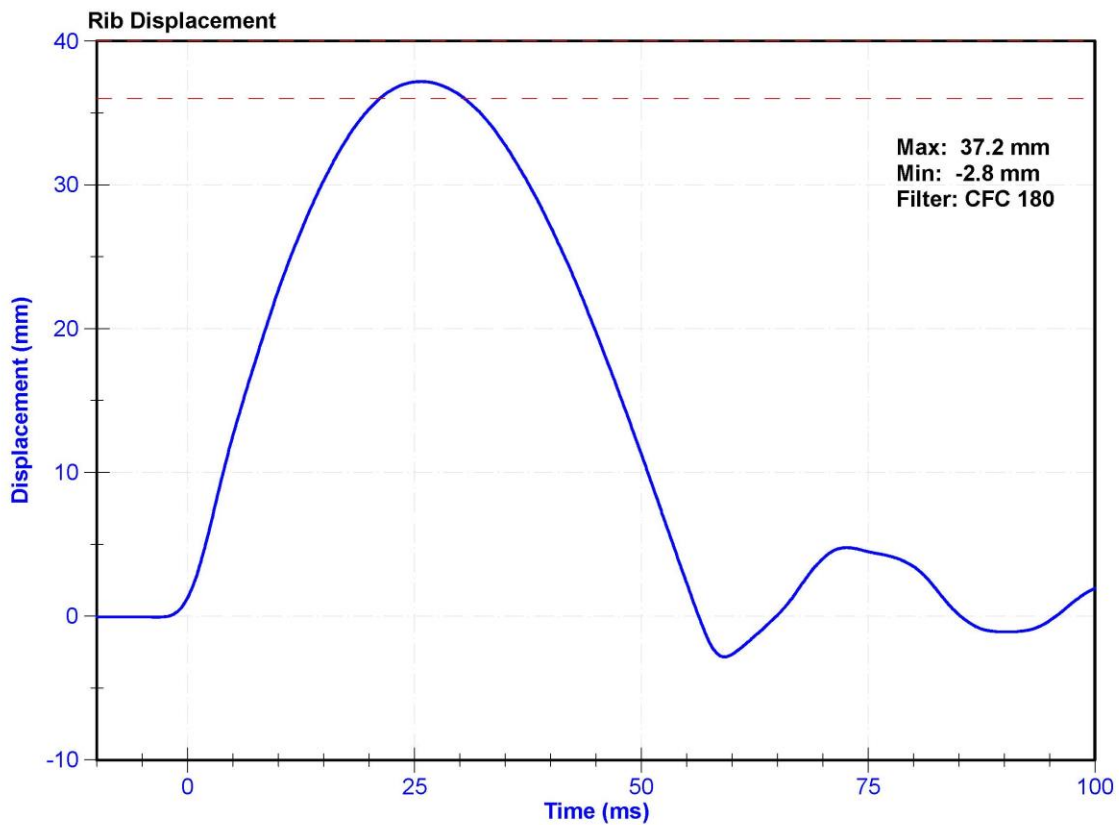


ATD Manufacturer	FTSS	Test Technician	C. Mantell
ATD Serial Number	F033	Laboratory Supervisor	K. Brogan

**Results**

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21.6	Pass
Humidity	10	70	%	33.5	Pass
Rib Displacement	46	51	mm	48.1	Pass

**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Rib Potentiometer	Honeywell MLT-38000203	DS-185GFE	11/25/2020	5/26/2021

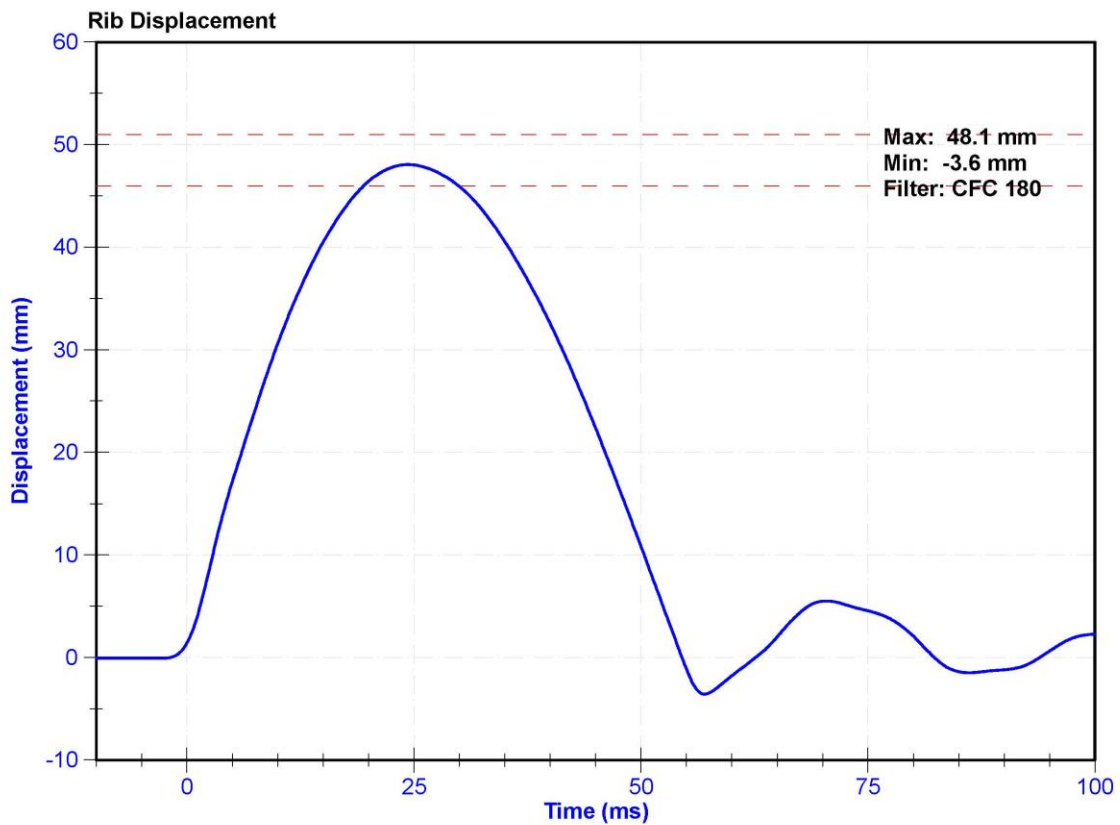


ATD Manufacturer	FTSS	Test Technician	C. Mantell
ATD Serial Number	F033	Laboratory Supervisor	K. Brogan

**Results**

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21.5	Pass
Humidity	10	70	%	32.9	Pass
Rib Displacement	36	40	mm	37.9	Pass

**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Rib Potentiometer	Honeywell MLT-38000203	DS-178GFE	11/25/2020	5/26/2021

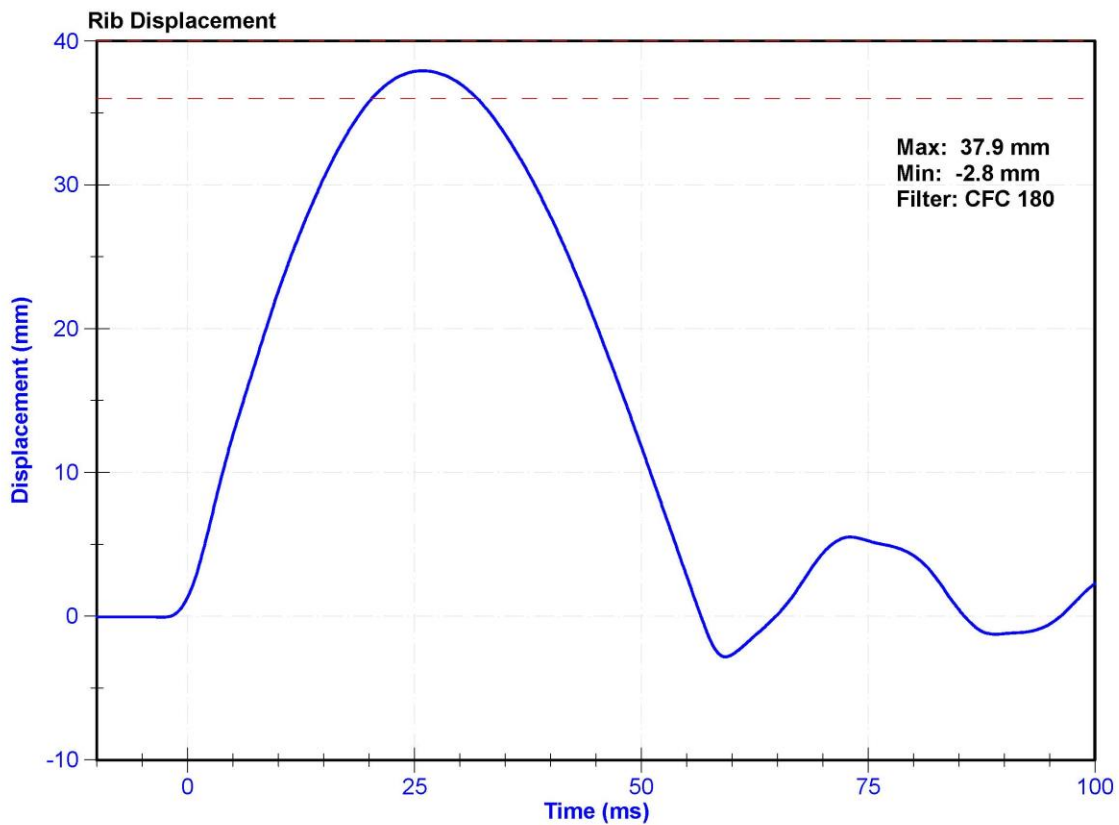


ATD Manufacturer	FTSS	Test Technician	C. Mantell
ATD Serial Number	F033	Laboratory Supervisor	K. Brogan

**Results**

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21.5	Pass
Humidity	10	70	%	32.9	Pass
Rib Displacement	46	51	mm	49.0	Pass

**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Rib Potentiometer	Honeywell MLT-38000203	DS-178GFE	11/25/2020	5/26/2021

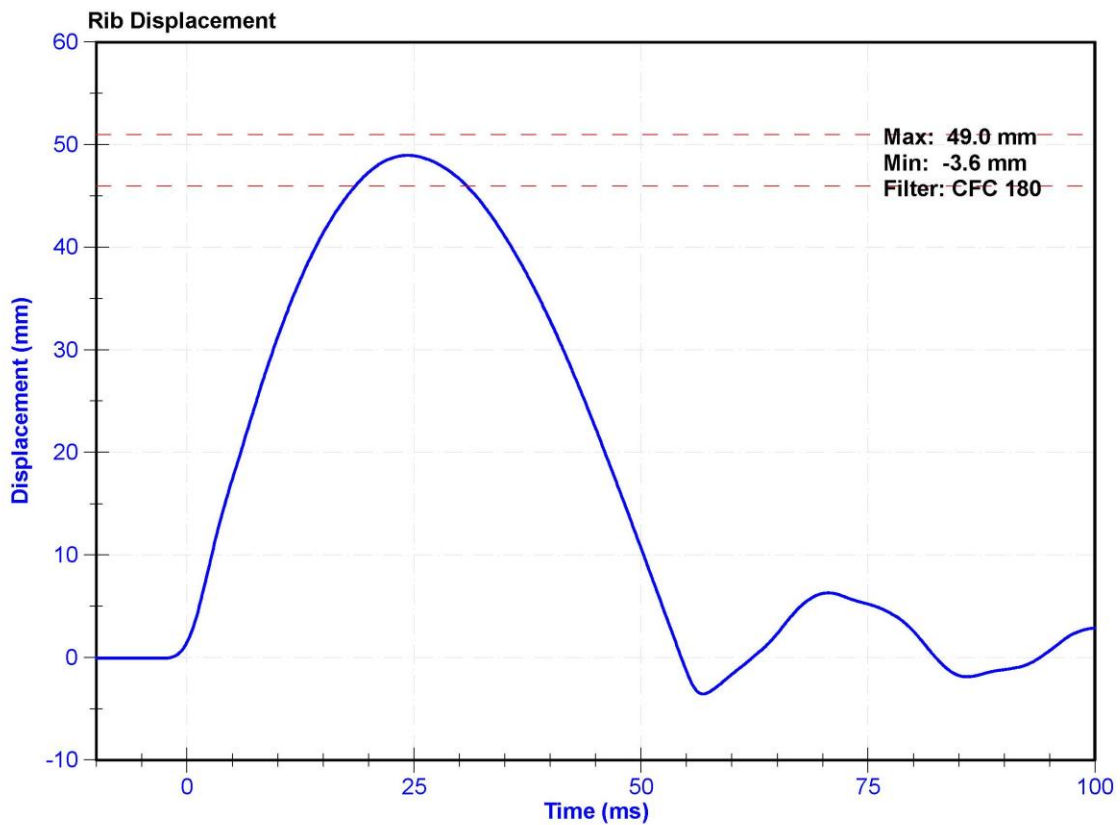


ATD Manufacturer	FTSS	Test Technician	S. Vacanti
ATD Serial Number	F033	Laboratory Supervisor	K. Brogan





**Results**

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	20.8	Pass
Humidity	10	70	%	28.0	Pass
Velocity	5.4	5.6	m/s	5.45	Pass
Resistive Force after 6ms	5100	6200	N	5958.8	Pass
Upper Thorax Rib Deflection	34	41	mm	35.9	Pass
Mid Thorax Rib Deflection	37	45	mm	40.4	Pass
Lower Thorax Rib Deflection	37	44	mm	40.0	Pass

**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Probe Accelerometer	MSI 64C-2000	A279031	5/8/2020	5/8/2021
Upper Thorax Rib Potentiometer	Honeywell MLT-38000203	DS-179GFE	11/25/2020	5/26/2021
Middle Thorax Rib Potentiometer	Honeywell MLT-38000203	DS-185GFE	11/25/2020	5/26/2021
Lower Thorax Rib Potentiometer	Honeywell MLT-38000203	DS-178GFE	11/25/2020	5/26/2021

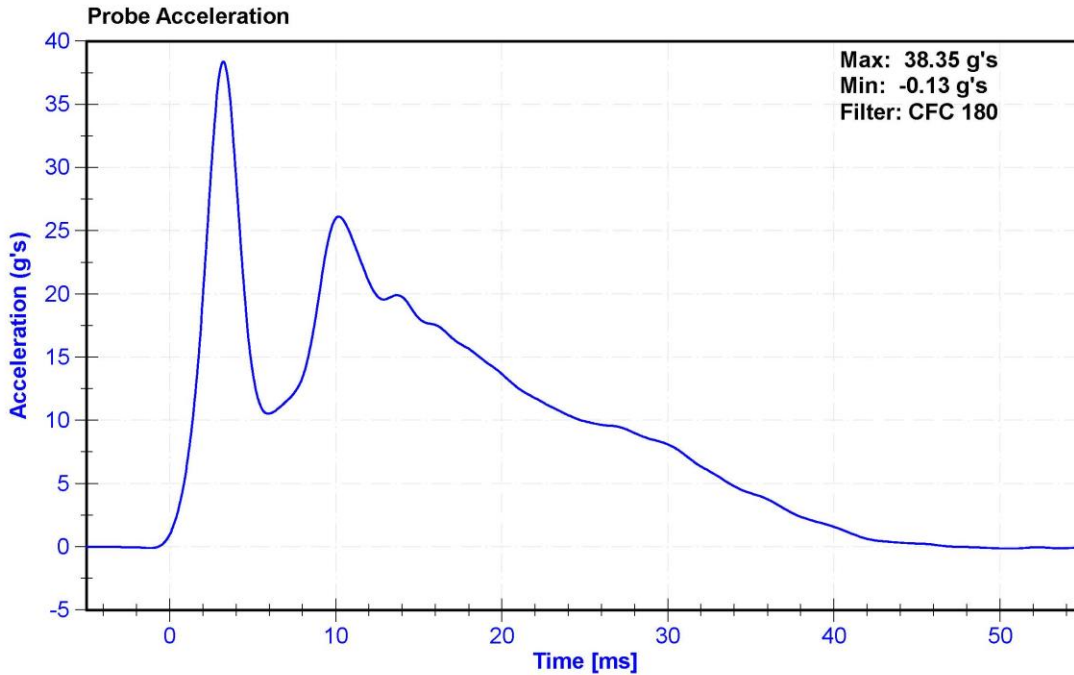

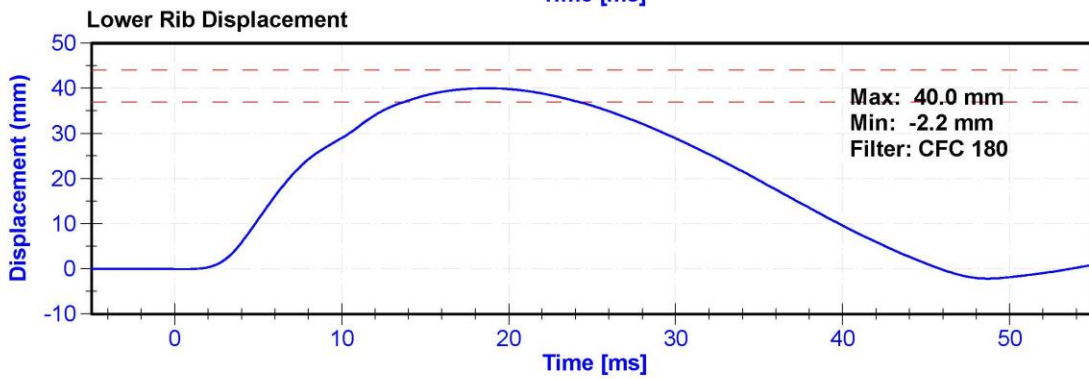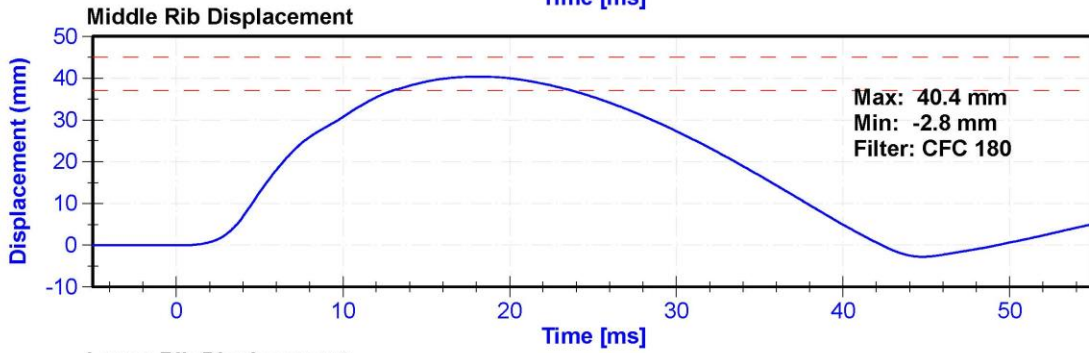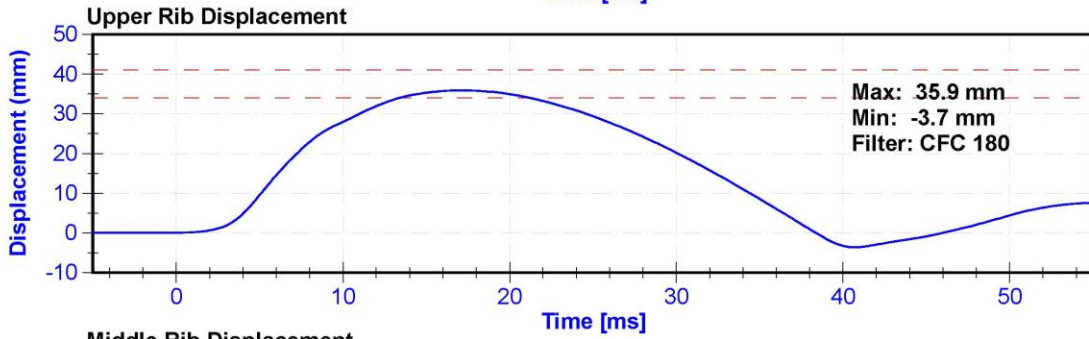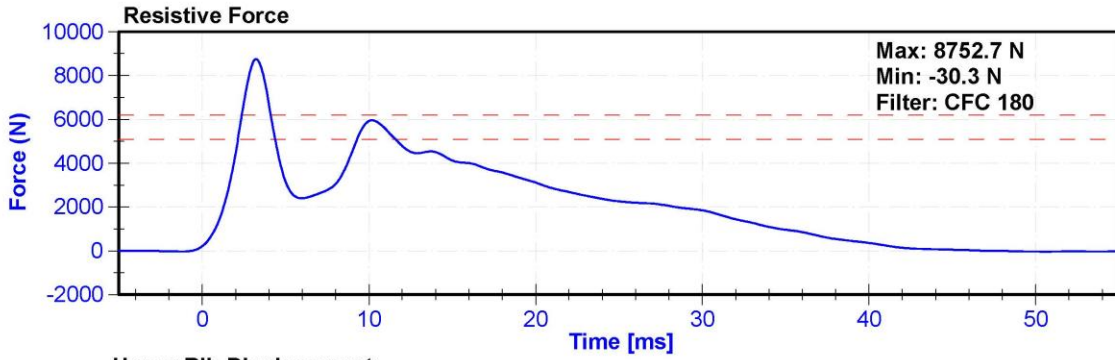




ATD Manufacturer	FTSS	Test Technician	S. Vacanti
ATD Serial Number	F033	Laboratory Supervisor	K.Brogan





**Results**

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	20.7	Pass
Humidity	10	70	%	28	Pass
Velocity	3.9	4.1	m/s	4.01	Pass
Combined Abdomen Force	2200	2700	N	2372.4	Pass
Time at Peak Abdomen Force	10.0	12.3	ms	10.25	Pass
Resistive Probe Force	4000	4800	N	4507.6	Pass
Time at Peak Resistive Force	10.6	13.0	ms	10.95	Pass

**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	MSI 64C-2000	A279031	5/8/2020	5/8/2021
Front Abdomen Load Cell	DENTON 2631J	26311512 GFE	3/19/2020	3/19/2021
Middle Abdomen Load Cell	DENTON 2631J	26311526 GFE	3/19/2020	3/19/2021
Rear Abdomen Load Cell	DENTON 2631J	26311516 GFE	3/19/2020	3/19/2021

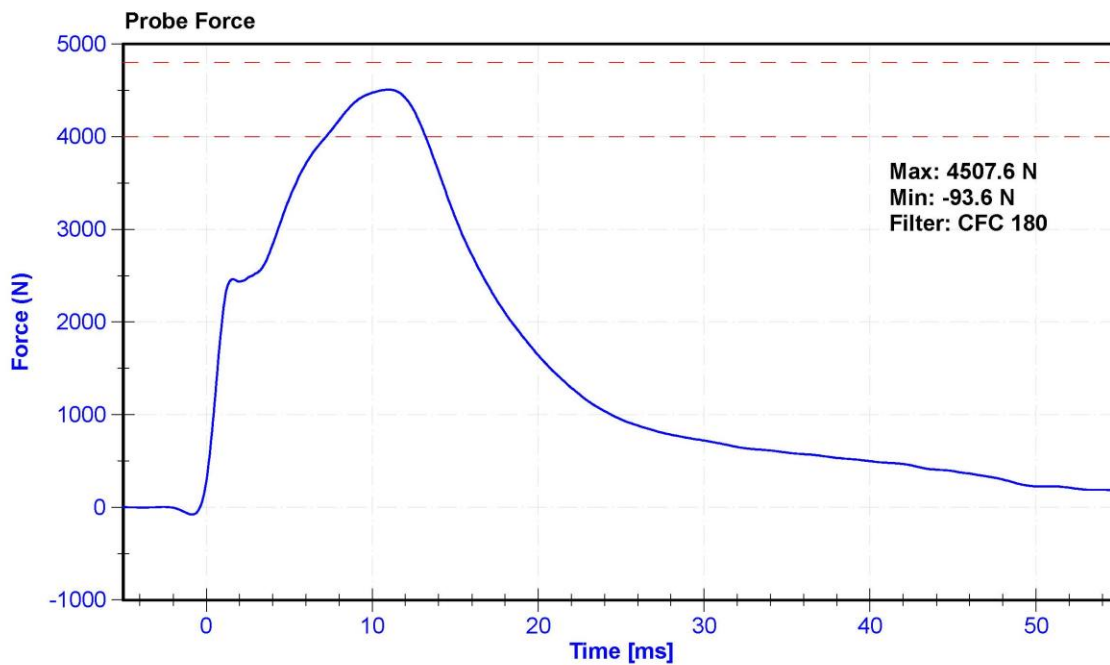

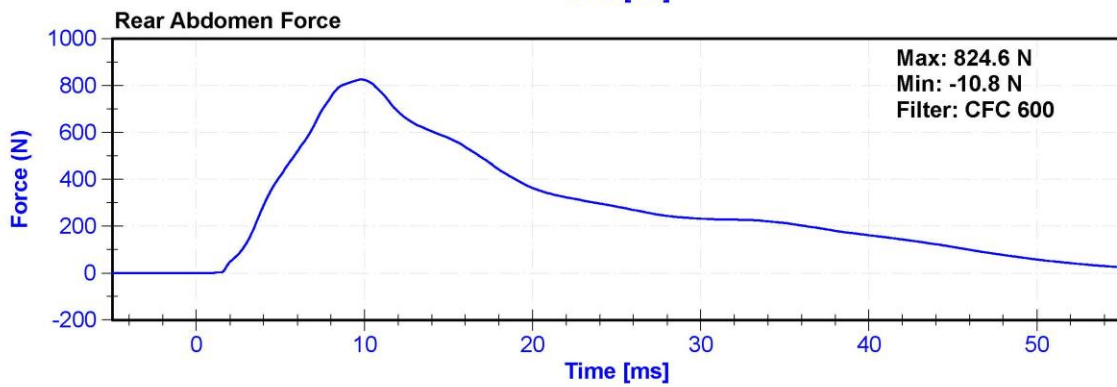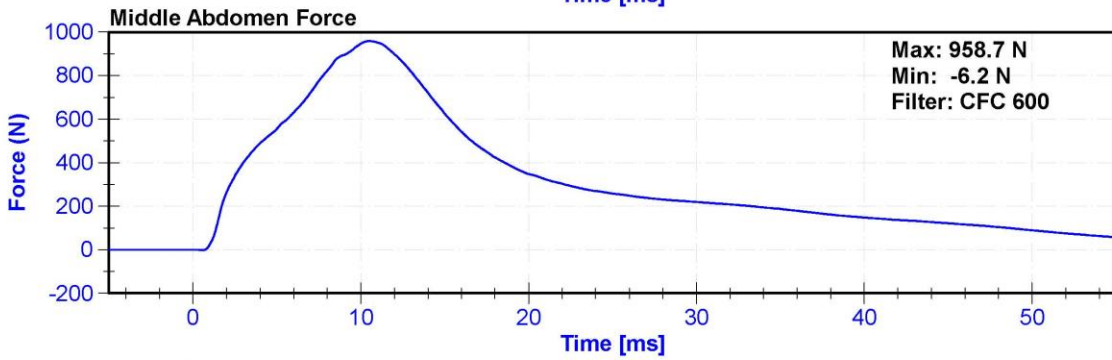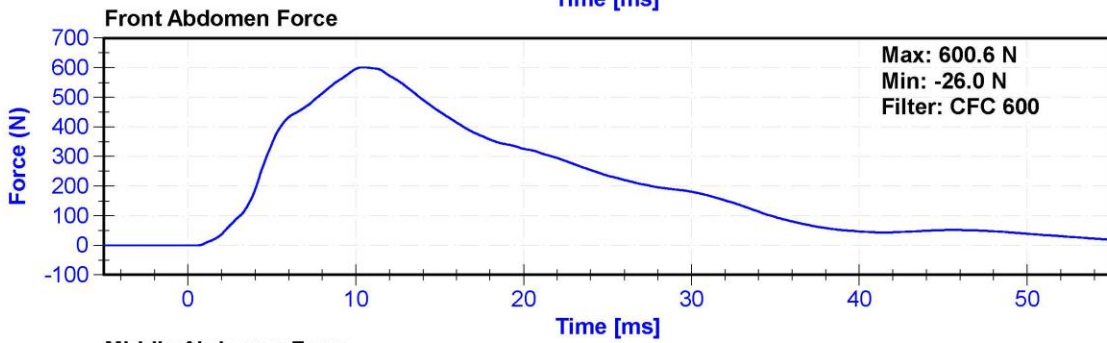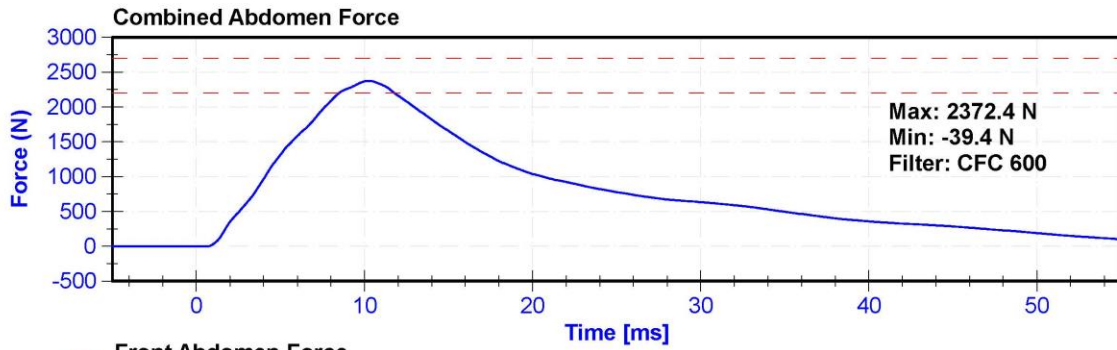



ATD Manufacturer	FTSS	Test Technician	E. Helenbrook
ATD Serial Number	F033	Laboratory Supervisor	K. Brogan



**Results**

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21.6	Pass
Humidity	10	70	%	22.3	Pass
Velocity	5.95	6.15	m/s	6.005	Pass
Lateral Spine Rotation	45	55	deg	51.1	Pass
Time at Maximum Rotation	39	53	ms	46.3	Pass
Time of Decay to Zero Degrees	37	57	ms	37.1	Pass
Pulse within Corridor?	-	-	-		

**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	ENDEVCO 7231CT	AC-C16503 Striker	2/6/2020	2/5/2021
Pendulum "A" Potentiometer	SP22G	DS-094	8/18/2020	8/18/2021
Condyle "B" Potentiometer	SP22G	DS-095	8/18/2020	8/18/2021

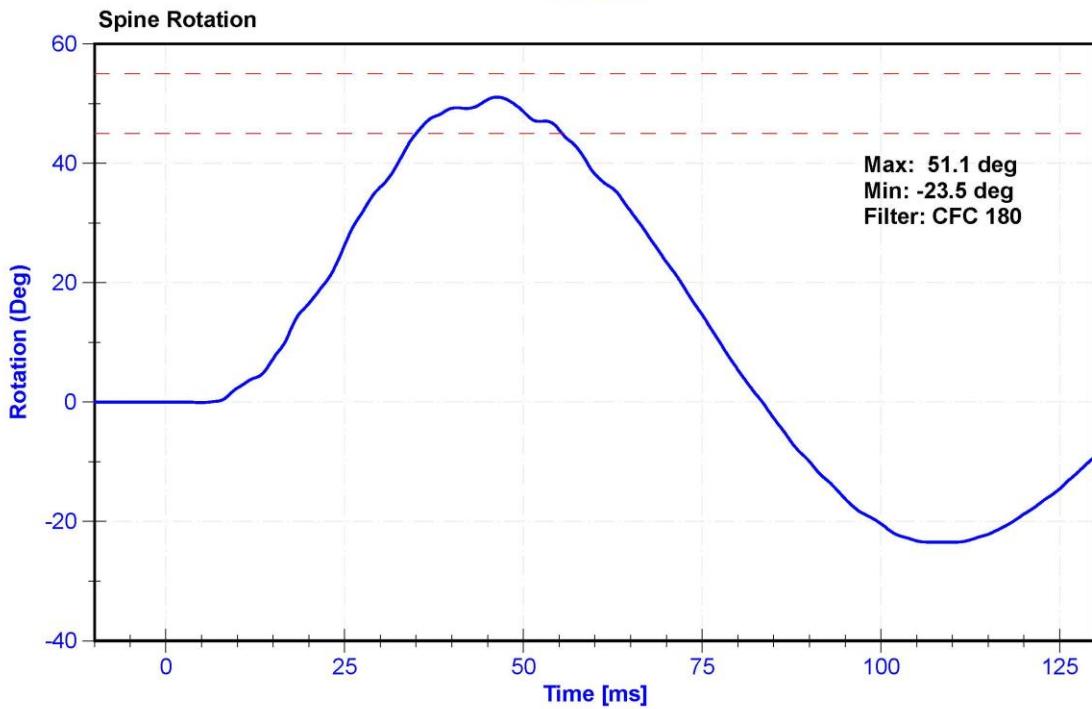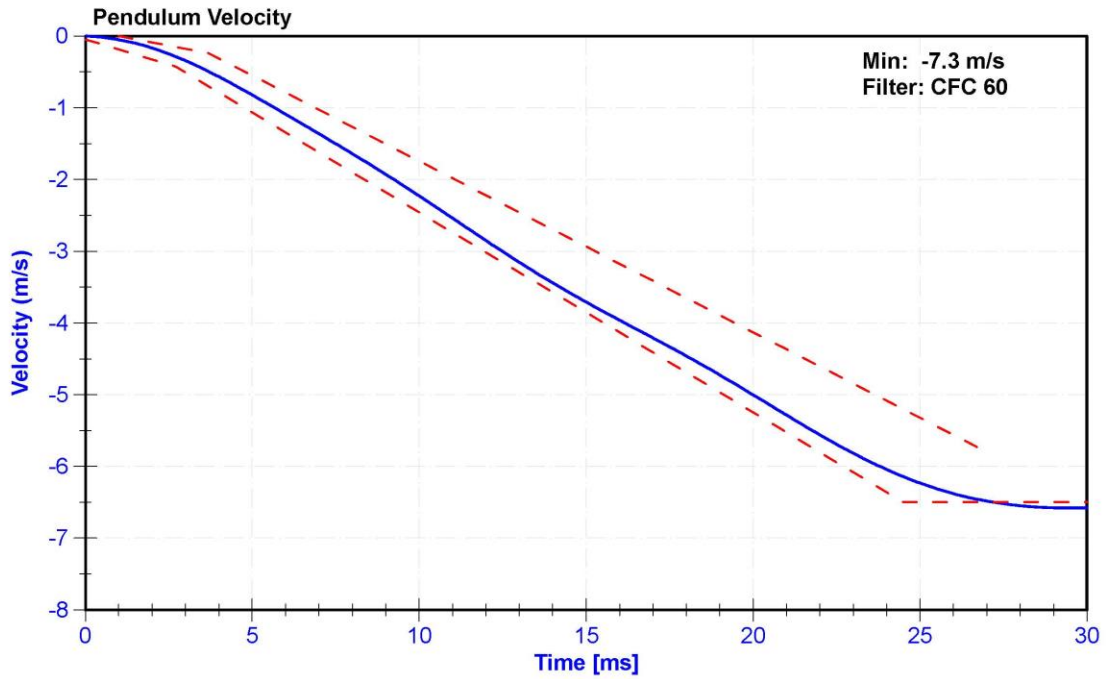

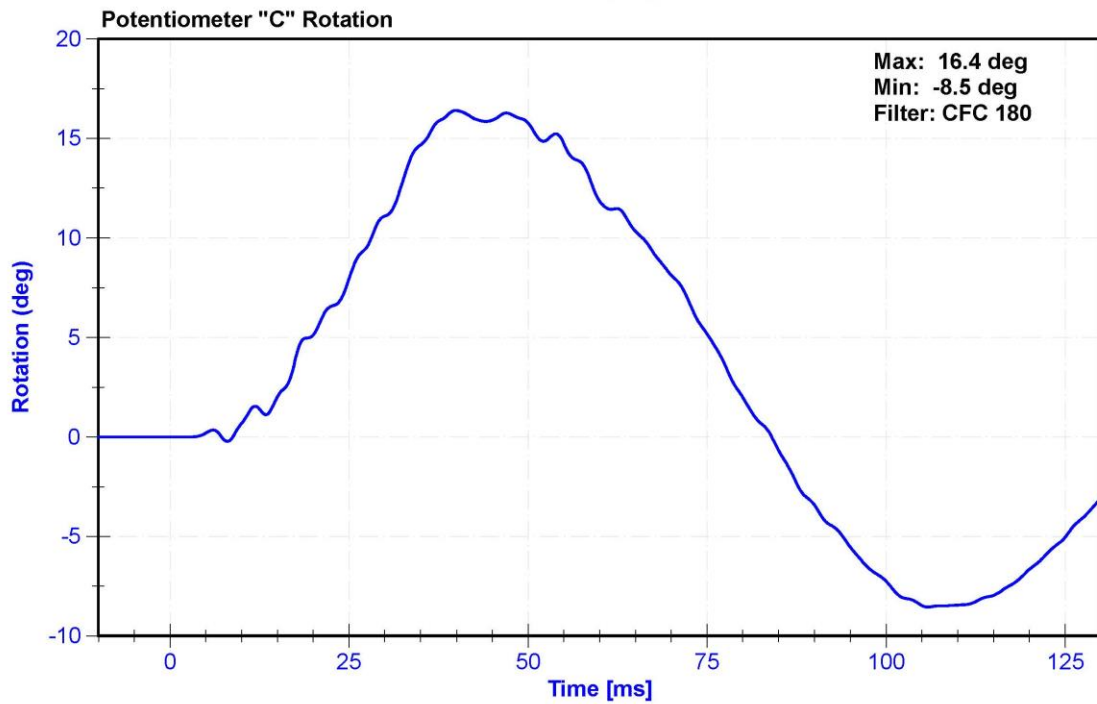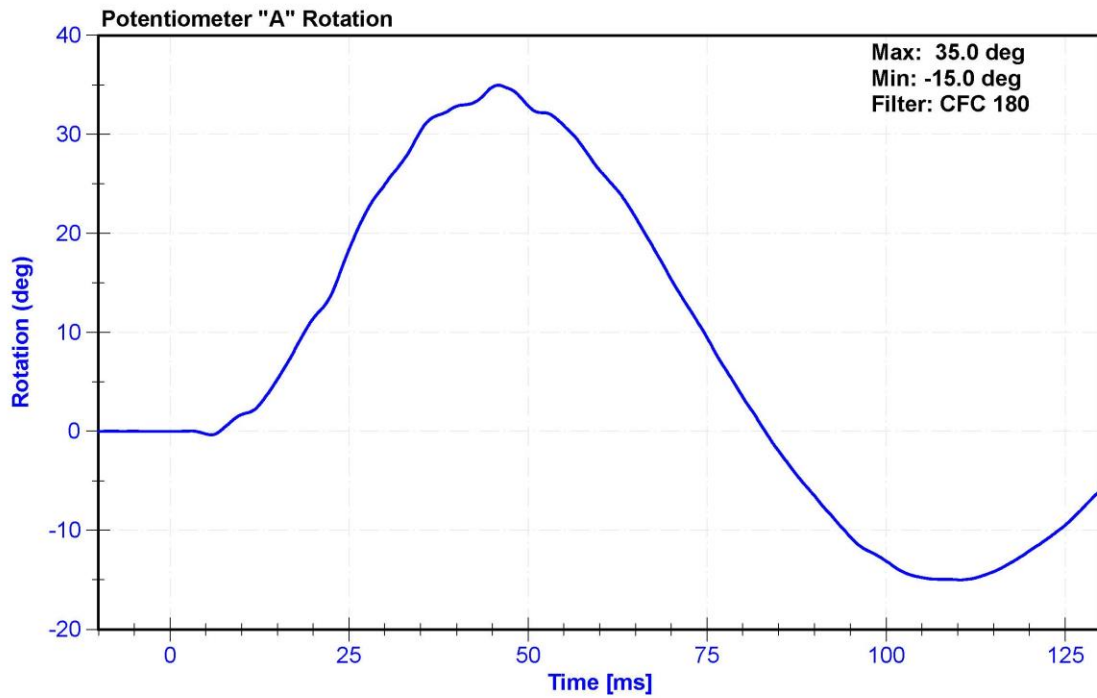


ATD Manufacturer	FTSS	Test Technician	S. Vacanti
ATD Serial Number	F033	Laboratory Supervisor	K. Brogan



**Results**

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	20.8	Pass
Humidity	10	70	%	28.0	Pass
Velocity	4.2	4.4	m/s	4.31	Pass
Resistive Force	4700	5400	N	5090.6	Pass
Time at Peak Resistive Force	11.8	16.1	ms	12.45	Pass
Pubic Force	-1590	-1230	N	-1254.2	Pass
Time at Peak Pubic Force	12.2	17.0	ms	13.20	Pass

**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	MSI 64C-2000	A278994	12/3/2020	12/3/2021
Pubic Load Cell	Denton 3096JFL	LC-464fy	7/23/2020	7/23/2021

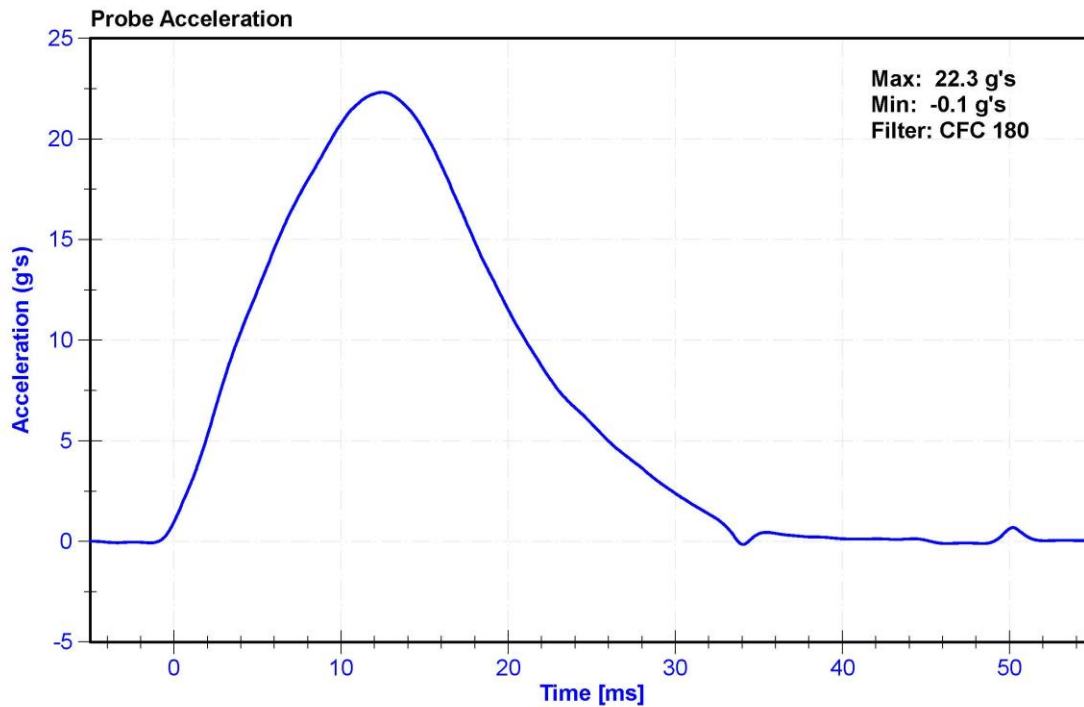

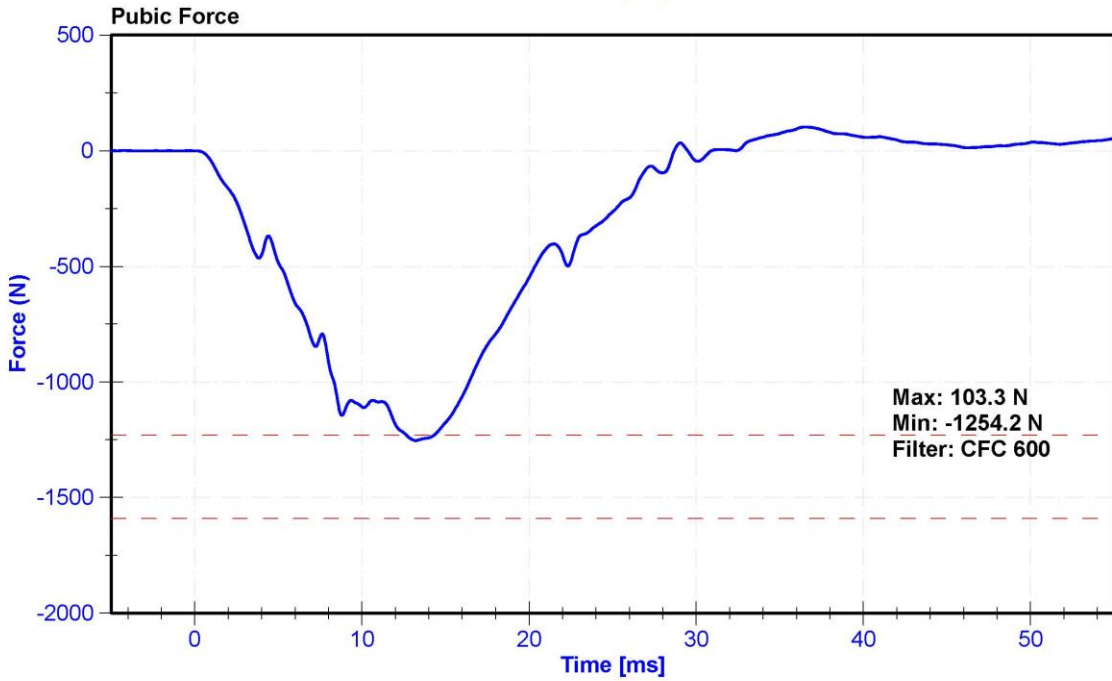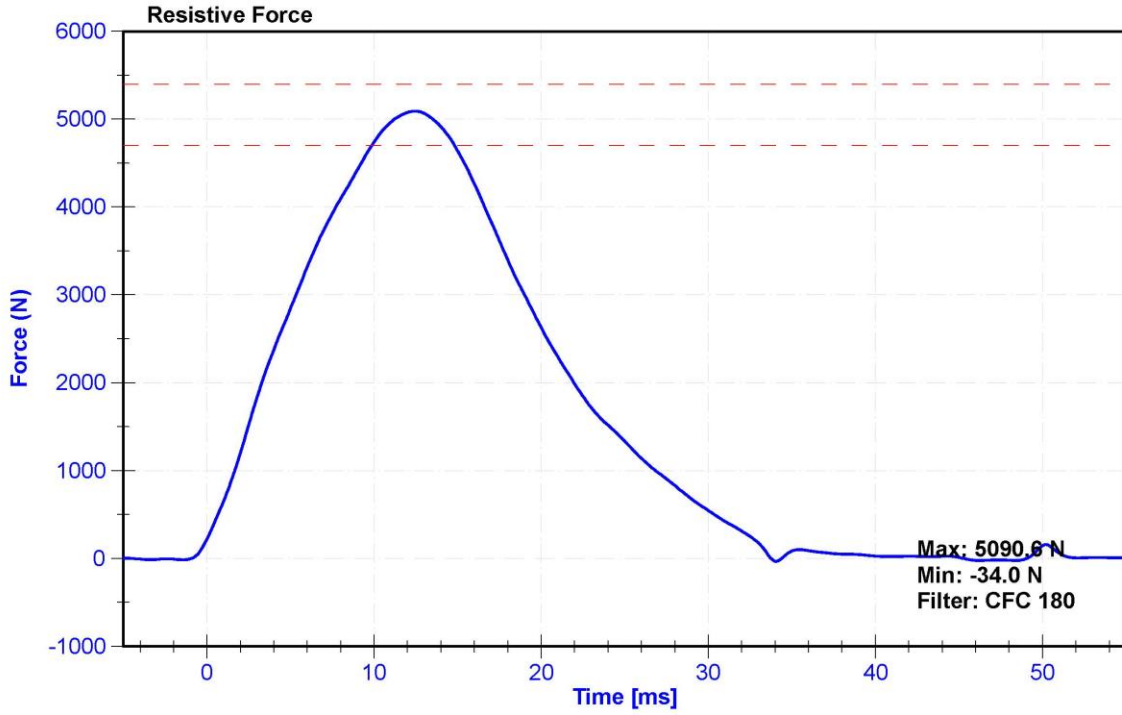

**CALIBRATION TEST RESULTS**

**POST-TEST**

**SID-IIS 5<sup>TH</sup> PERCENTILE FEMALE - PASSENGER ATD**

**SERIAL No: DG8012**






External Measurements - SID-IIs

Technician: K. Dutton

Date: 01/06/2021

Dummy Serial Number: DG8012

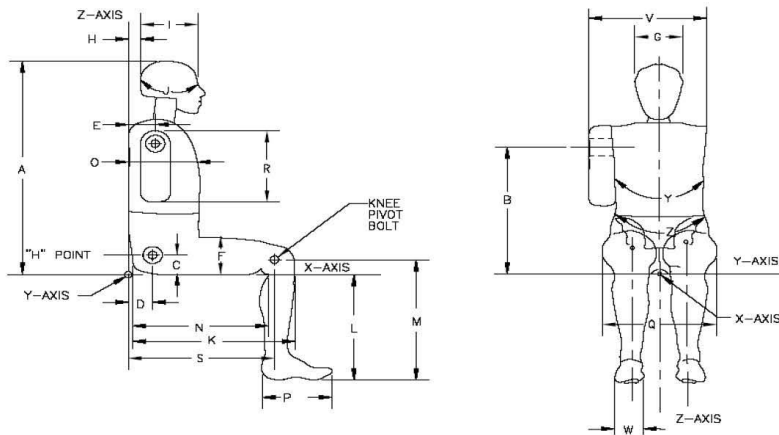

Symbol	Description	Specification (mm)		Result (mm)	Pass/Fail
A	Sitting Height	772	788	779	Pass
B	Shoulder Pivot Height	437	453	446	Pass
C	H-point Height	79	89	83	Pass
D	H-point from seatback	141	151	146	Pass
E	Shoulder Pivot from Backline	97	107	103	Pass
F	Thigh Clearance	119	135	127	Pass
G	Head Breadth	140	148	144	Pass
H	Head Back from Backline	40	46	43	Pass
I	Head Depth	178	188	184	Pass
J	Head Circumference	541	551	548	Pass
K	Buttock to Knee Length	514	540	533	Pass
L	Popliteal Height	343	369	357	Pass
M	Knee Pivot to floor height	392	409	402	Pass
N	Buttock Popliteal Length	416	442	433	Pass
O	Chest Depth w/o jacket	195	211	205	Pass
P	Foot Length	216	232	225	Pass
Q	Hip Breadth (w/pelvic plugs)	313	323	319	Pass
R	Arm Length	249	259	255	Pass
S	Knee Joint to seatback	477	493	486	Pass
V	Shoulder Width	341	357	346	Pass
W	Foot Width	78	94	85	Pass
Y	Chest Circumference w/jacket	851	881	867	Pass
Z	Waist Circumference	761	791	781	Pass


ATD Manufacturer	FTSS	Test Technician	S. Vacanti
ATD Serial Number	DG8012	Laboratory Supervisor	K. Brogan




**Results**

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21	Pass
Humidity	10	70	%	28	Pass
Resultant Acceleration	115	137	g's	129.2	Pass
Oscillation	0	15	%	1.1	Pass
Fore-Aft Acceleration	-15	15	g's	2.6	Pass

**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
X Accelerometer	ENDEVCO 7264	AC-P74788	11/5/2020	5/6/2021
Y Accelerometer	ENDEVCO 7264CT	AC-P83432	11/5/2020	5/6/2021
Z Accelerometer	ENDEVCO 7264	AC-P83319	11/5/2020	5/6/2021

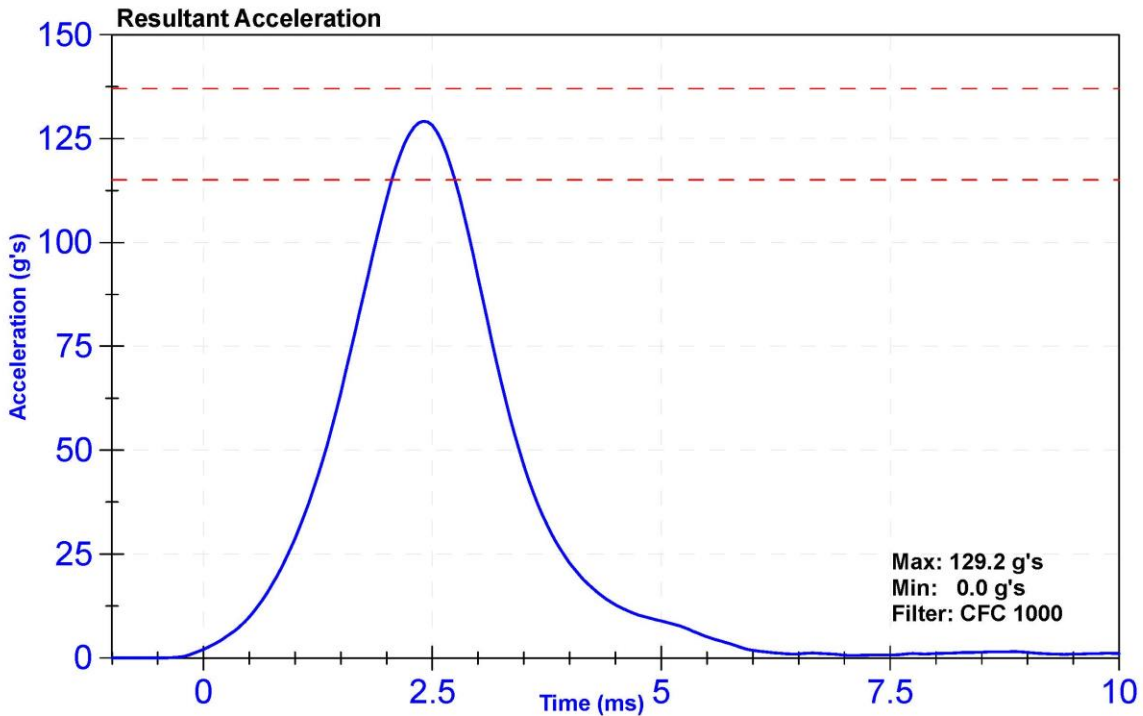

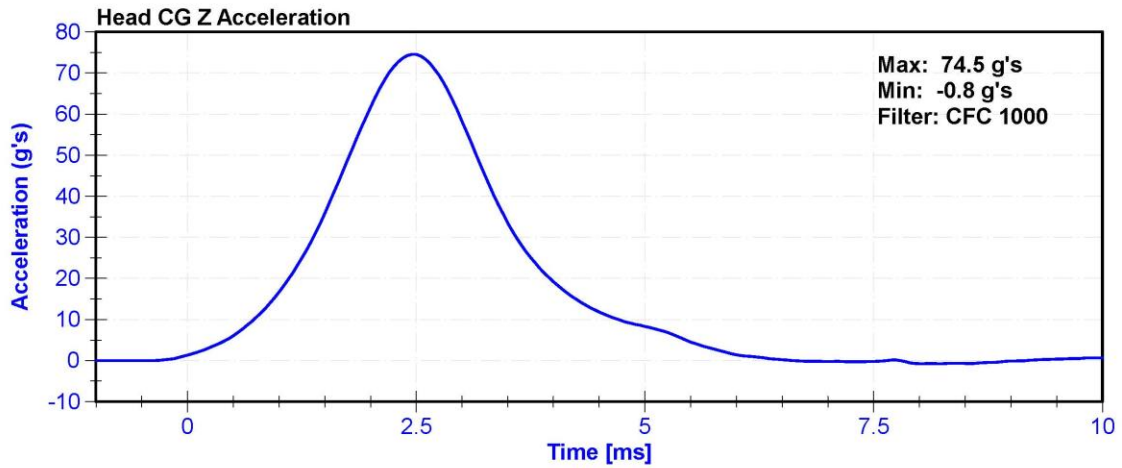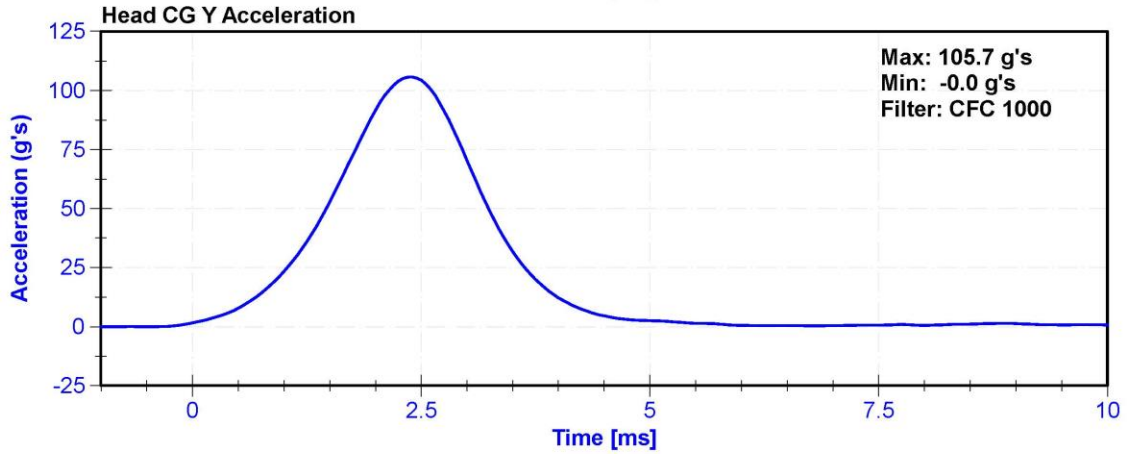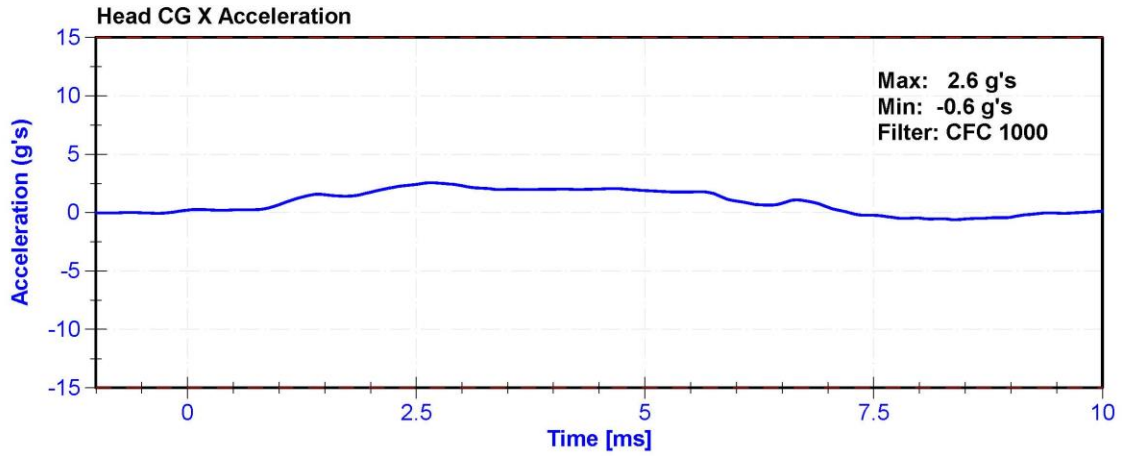


ATD Manufacturer	FTSS	Test Technician	S. Vacanti
ATD Serial Number	DG8012	Laboratory Supervisor	K. Brogan



**Results**

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	20.9	Pass
Humidity	10	70	%	28	Pass
Velocity	5.51	5.63	m/s	5.584	Pass
Pendulum Impulse at 10ms	2.2	2.8	m/s	2.23	Pass
Pendulum Impulse at 15ms	3.3	4.1	m/s	3.42	Pass
Pendulum Impulse at 20ms	4.4	5.4	m/s	4.60	Pass
Pendulum Impulse at 25ms	5.4	6.1	m/s	5.54	Pass
Pendulum Impulse from 25 to 100ms	5.5	6.2	m/s	6.08	Pass
Neck Rotation	71	81	deg	73.3	Pass
Time at Maximum Rotation	50	70	ms	60.2	Pass
Moment about the OC	36	44	Nm	43.8	Pass
Moment Decay to 0 Nm	102	126	ms	112.3	Pass

**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	ENDEVCO 7231CT	AC-C16503 Striker	2/6/2020	2/5/2021
Pendulum Potentiometer	Denton 78051-342	DS-184Pend	11/6/2020	11/6/2021
Condyle Potentiometer	Denton 78051-342	DS-185Pend	11/6/2020	11/6/2021
Upper Neck Load Cell	Denton 1716	17162019 FY	3/18/2020	3/18/2021

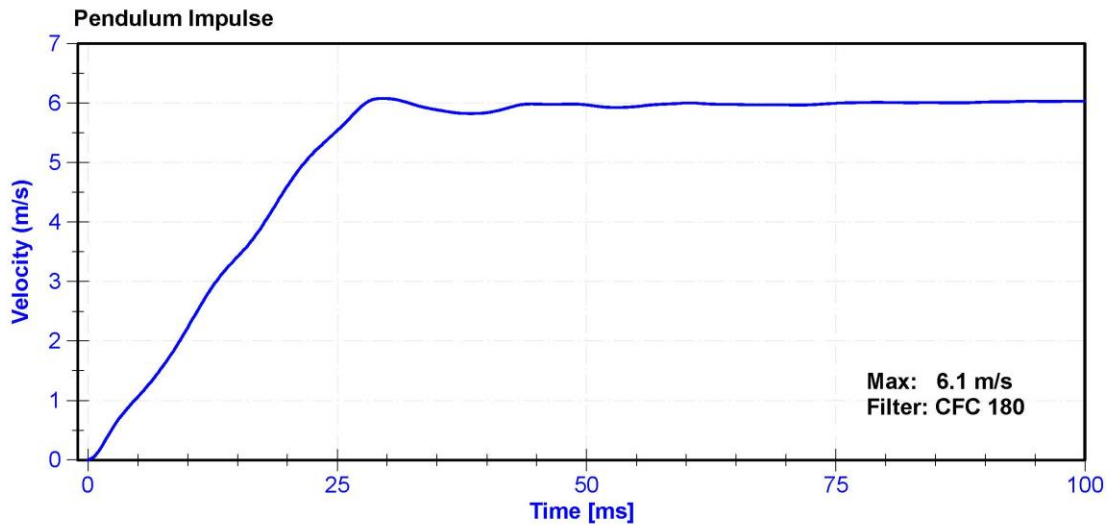

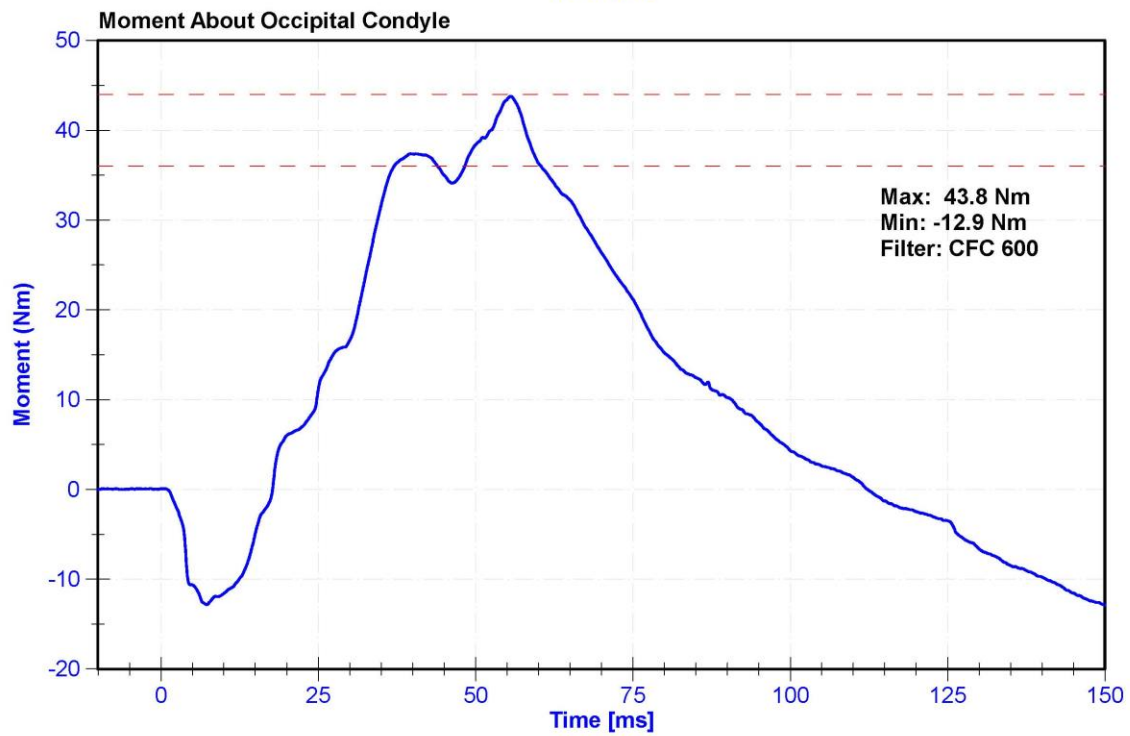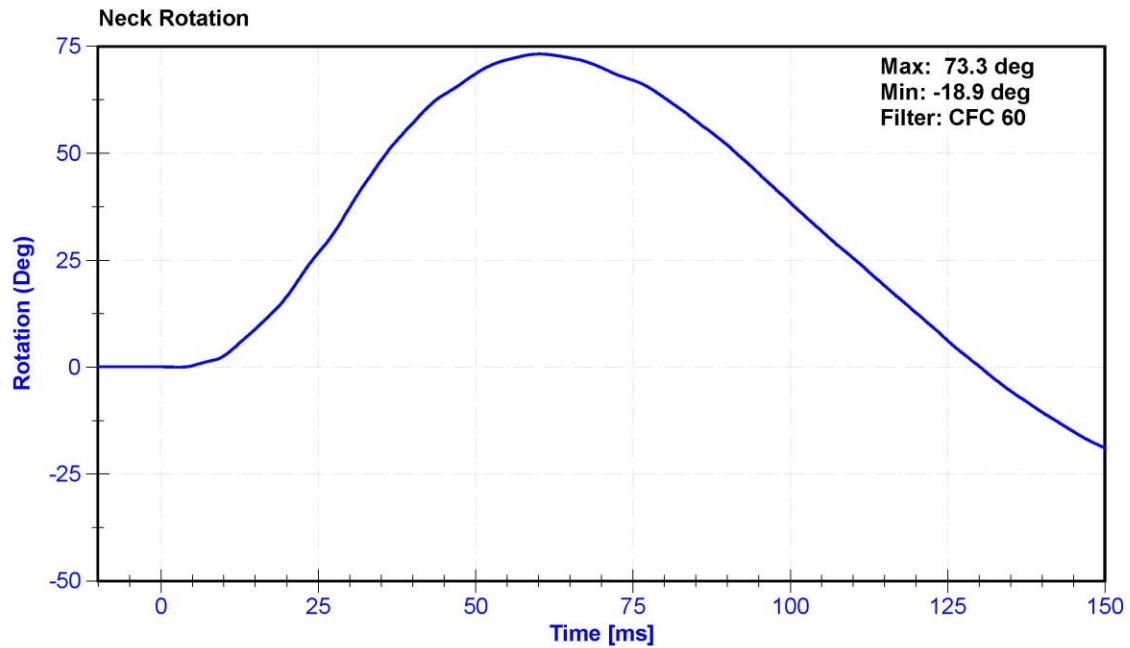


ATD Manufacturer	FTSS	Test Technician	D.Reinhard
ATD Serial Number	DG8012	Laboratory Supervisor	K. Brogan



**Results**

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	20.7	Pass
Humidity	10	70	%	29	Pass
Velocity	4.2	4.4	m/s	4.32	Pass
Probe Acceleration	13	18	g's	16.7	Pass
Shoulder Deflection	28	37	mm	28.3	Pass
Lateral Upper Spine Acceleration	17	22	g's	21.1	Pass

**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	MSI 64C-2000	A279031	5/8/2020	5/8/2021
Shoulder Potentiometer	Servo 08TC1-3745	DS-1845GFE	12/2/2020	6/2/2021
Upper Spine Y Accelerometer	ENDEVCO 7264CT	AC-P64148	11/5/2020	5/6/2021

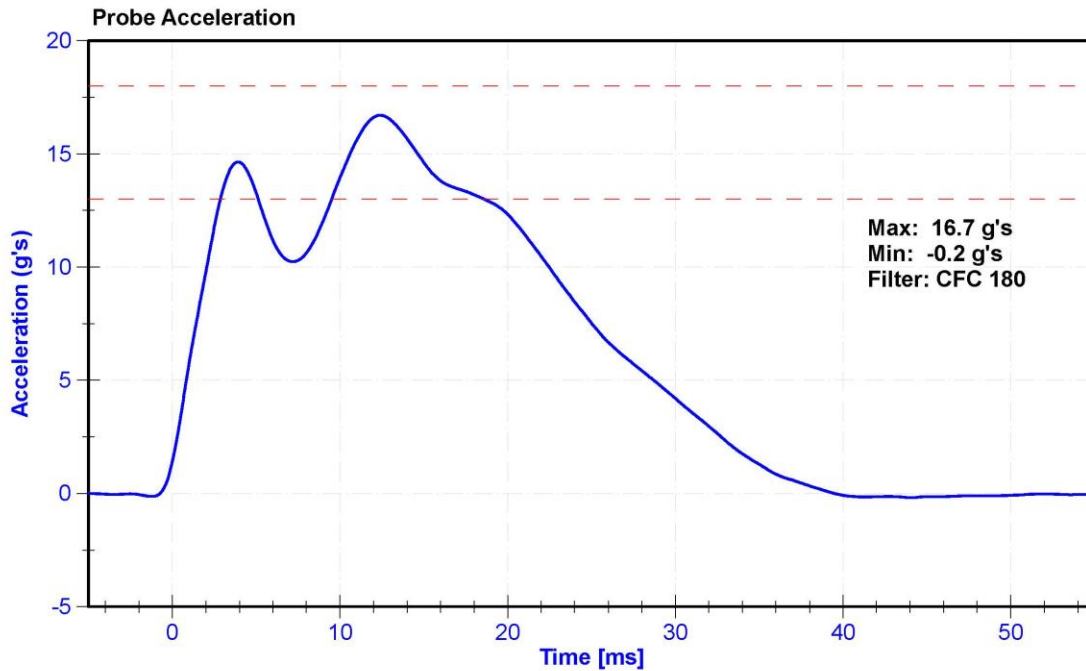

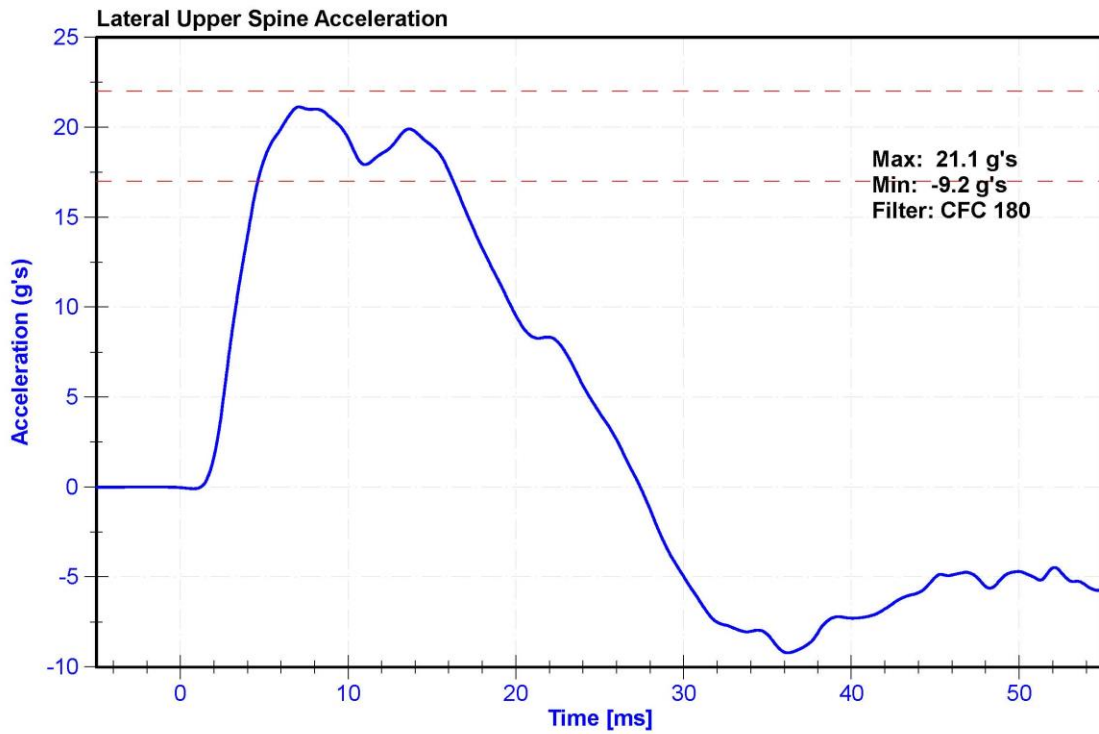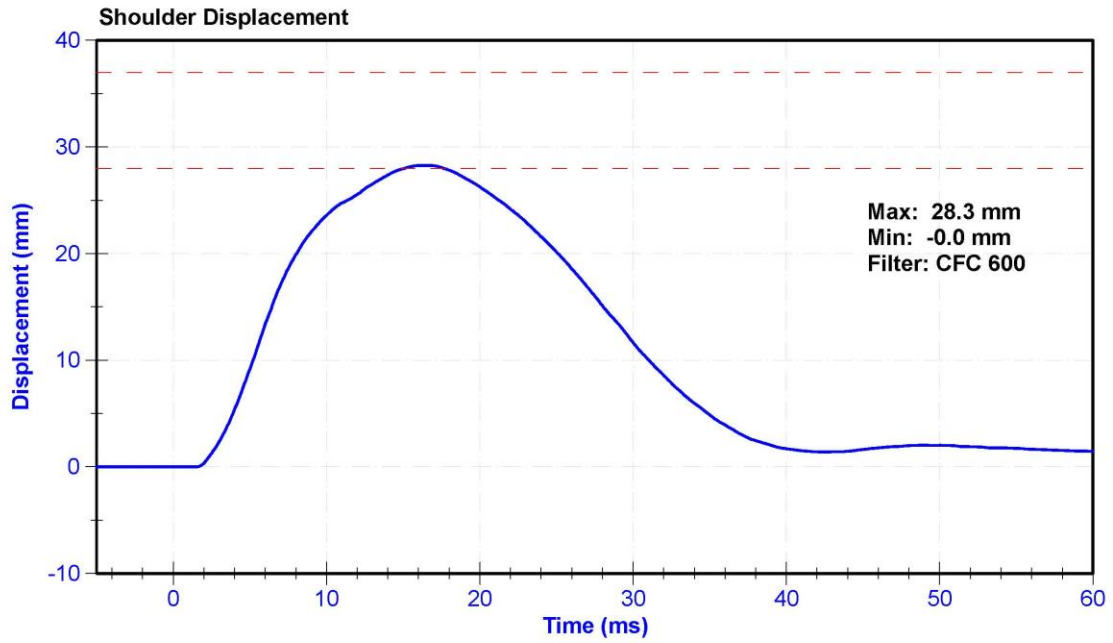


ATD Manufacturer	FTSS	Test Technician	D.Reinhard
ATD Serial Number	DG8012	Laboratory Supervisor	K. Brogan

**Results**





Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	20.9	Pass
Humidity	10	70	%	29.0	Pass
Velocity	6.6	6.8	m/s	6.68	Pass
Probe Acceleration after 5 ms	30	36	g's	34.6	Pass
Lateral Upper Spine Acceleration	34	43	g's	38.4	Pass
Lateral Lower Spine Acceleration	29	37	g's	32.2	Pass
Shoulder Deflection	31	40	mm	33.6	Pass
Upper Thorax Rib Deflection	25	32	mm	27.8	Pass
Mid Thorax Rib Deflection	30	36	mm	31.8	Pass
Lower Thorax Rib Deflection	32	38	mm	34.3	Pass



**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	MSI 64C-2000	A279031	5/8/2020	5/8/2021
Upper Spine T1 Y Accelerometer	ENDEVCO 7264CT	AC-P64148	11/5/2020	5/6/2021
Upper Spine T12 Y Accelerometer	ENDEVCO 7264C	AC-P51327	11/5/2020	5/6/2021
Shoulder Potentiometer	Servo 08TC1-3745	DS-1845GFE	12/2/2020	6/2/2021
Upper Thorax Rib Potentiometer	Servo 1246	DS-2165GFE	11/6/2020	5/7/2021
Middle Thorax Rib Potentiometer	Servo 08TC1-3621	DS-45 GFE	11/6/2020	5/7/2021
Lower Thorax Rib Potentiometer	Servo 08TC1-3787	DS-011GFE	11/6/2020	5/7/2021

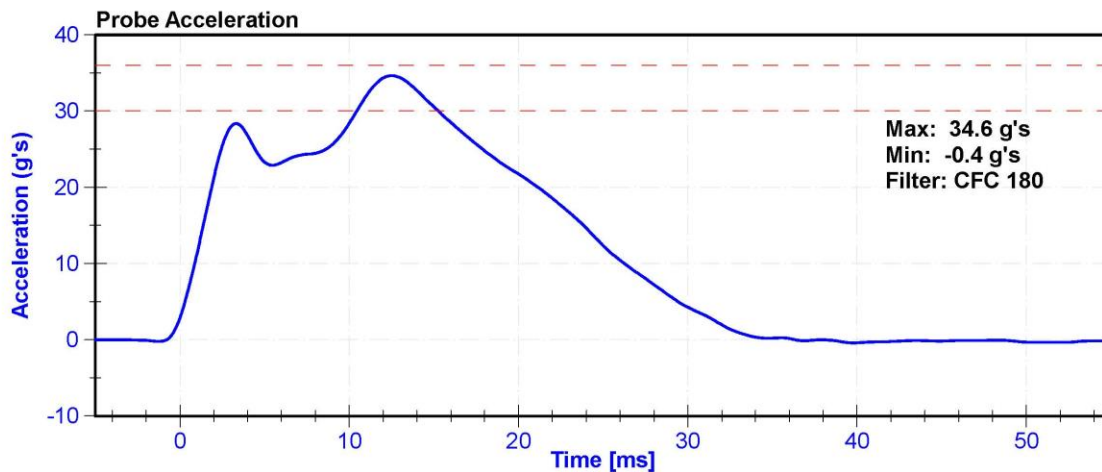



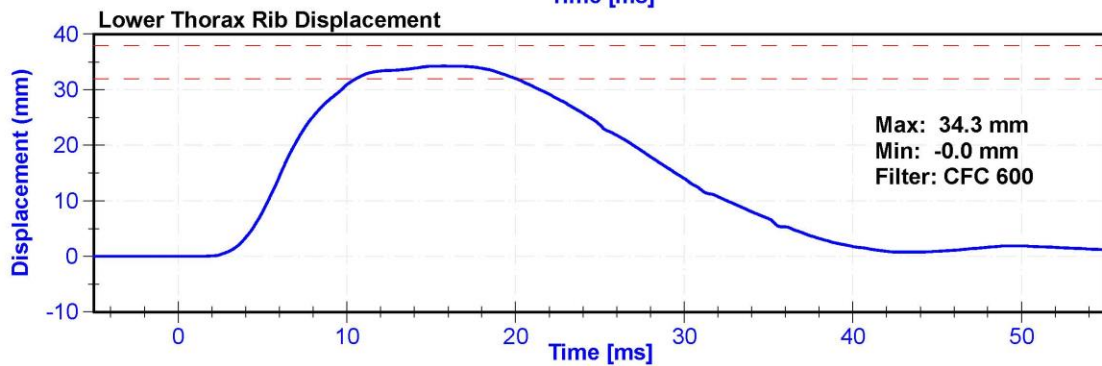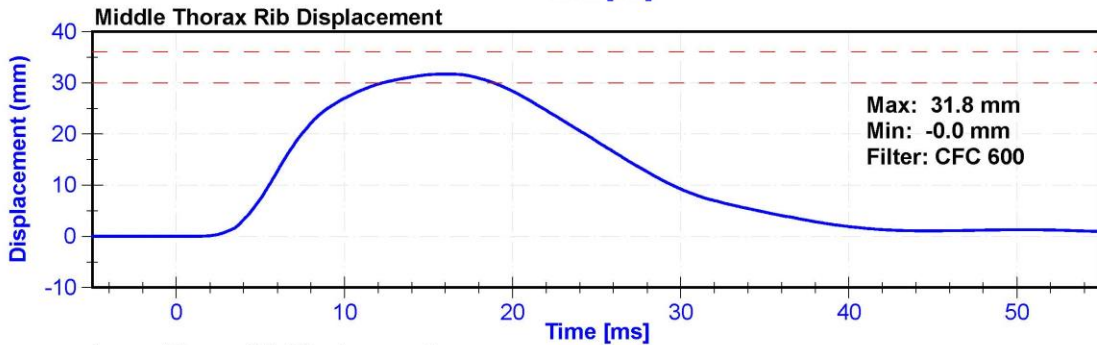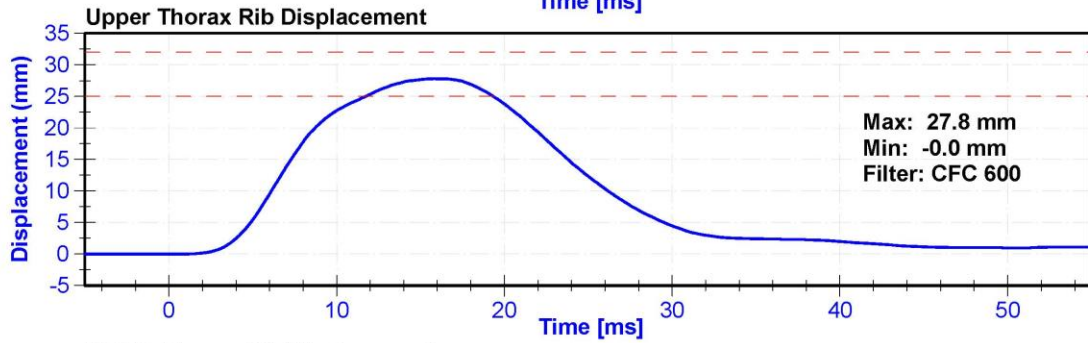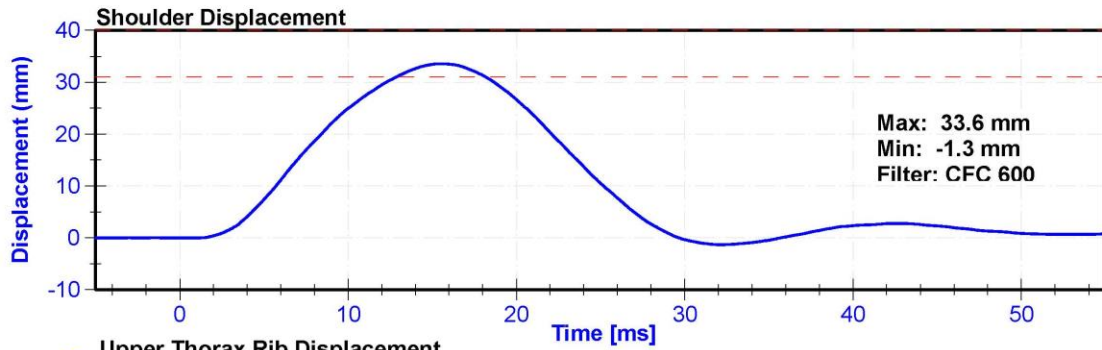

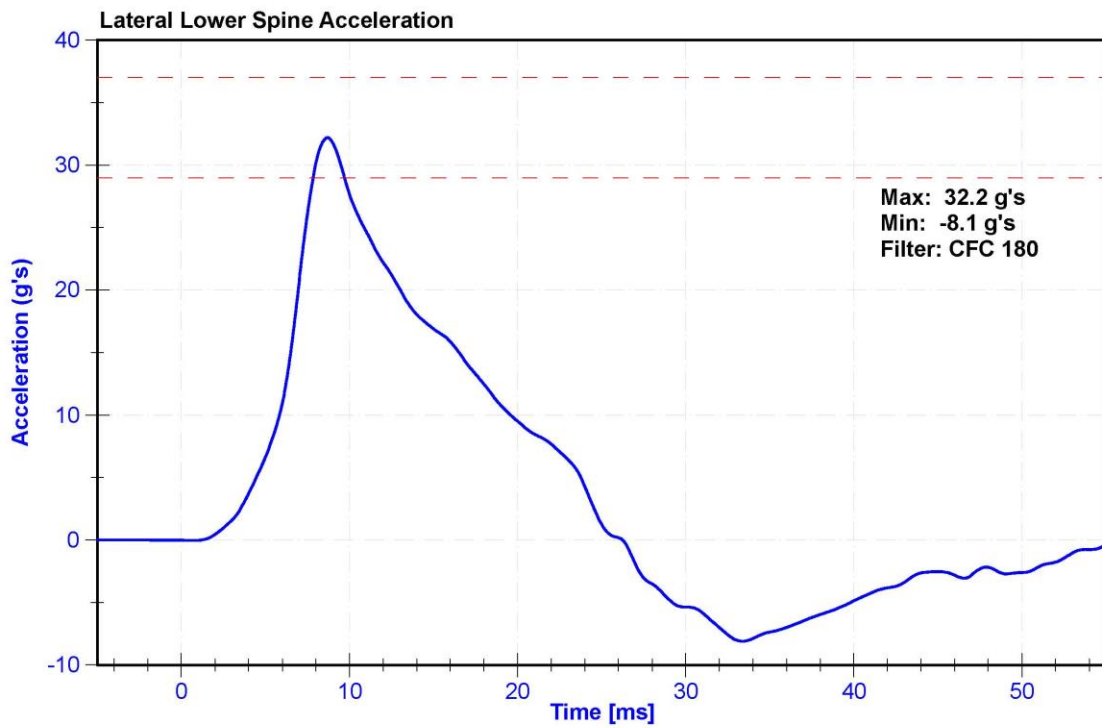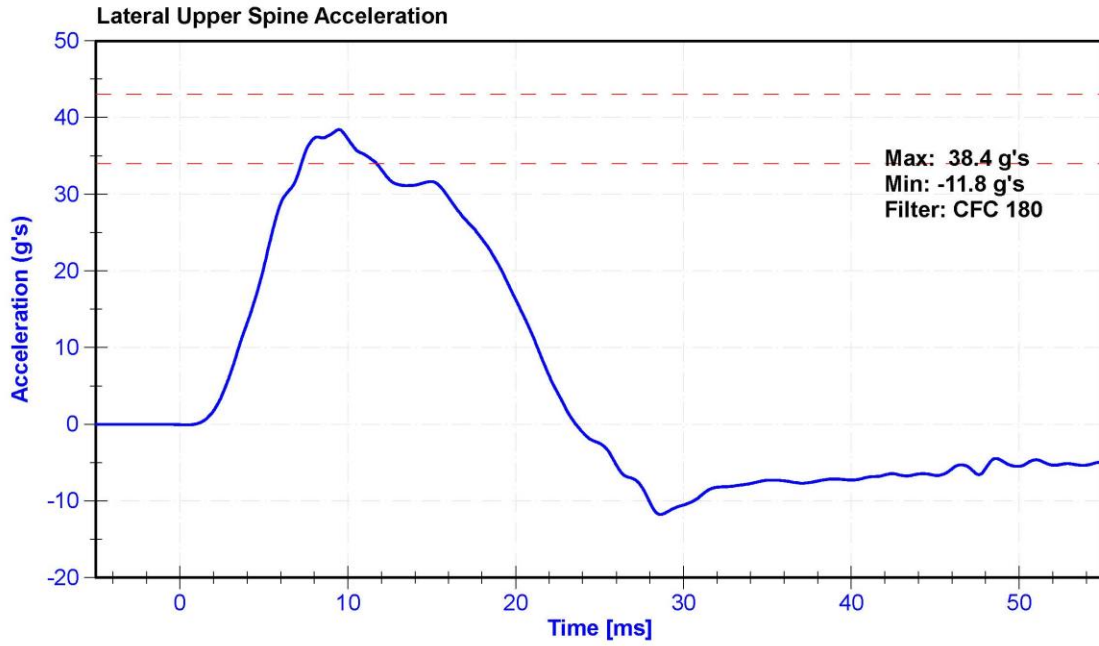


ATD Manufacturer	FTSS	Test Technician	D.Reinhard
ATD Serial Number	DG8012	Laboratory Supervisor	K. Brogan




**Results**



Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	20.9	Pass
Humidity	10	70	%	29	Pass
Velocity	4.2	4.4	m/s	4.25	Pass
Probe Acceleration	14	18	g's	16.0	Pass
Lateral Upper Spine Acceleration	13	17	g's	14.0	Pass
Lateral Lower Spine Acceleration	7	11	g's	9.1	Pass
Upper Thorax Rib Deflection	32	40	mm	37.2	Pass
Middle Thorax Rib Deflection	39	45	mm	40.8	Pass
Lower Thorax Rib Deflection	35	43	mm	37.3	Pass

**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	MSI 64C-2000	A279031	5/8/2020	5/8/2021
Upper Spine Y Accelerometer	ENDEVCO 7264CT	AC-P64148	11/5/2020	5/6/2021
Lower Spine Y Accelerometer	ENDEVCO 7264C	AC-P51327	11/5/2020	5/6/2021
Upper Thorax Rib Potentiometer	Servo 1246	DS-2165GFE	11/6/2020	5/7/2021
Middle Thorax Rib Potentiometer	Servo 08TC1-3621	DS-45 GFE	11/6/2020	5/7/2021
Lower Thorax Rib Potentiometer	Servo 08TC1-3787	DS-011GFE	11/6/2020	5/7/2021

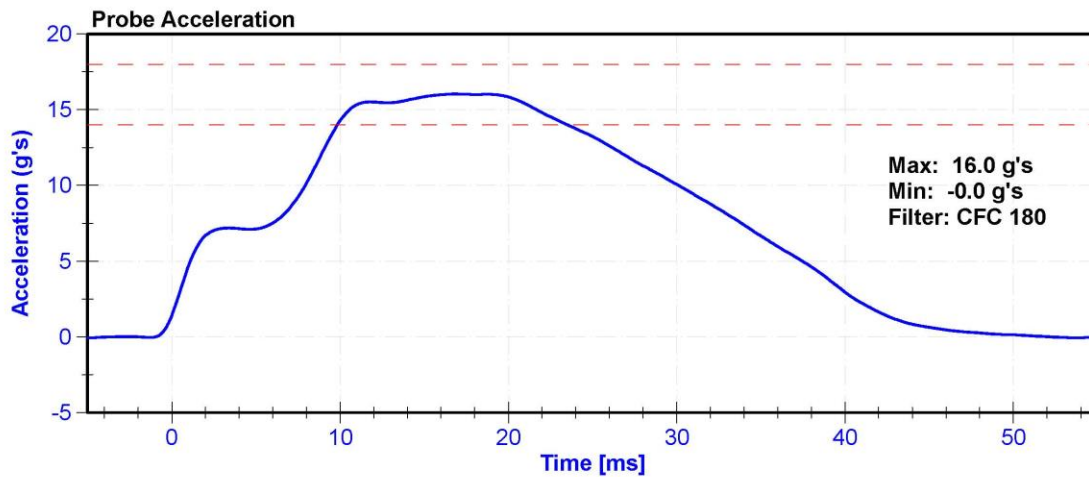

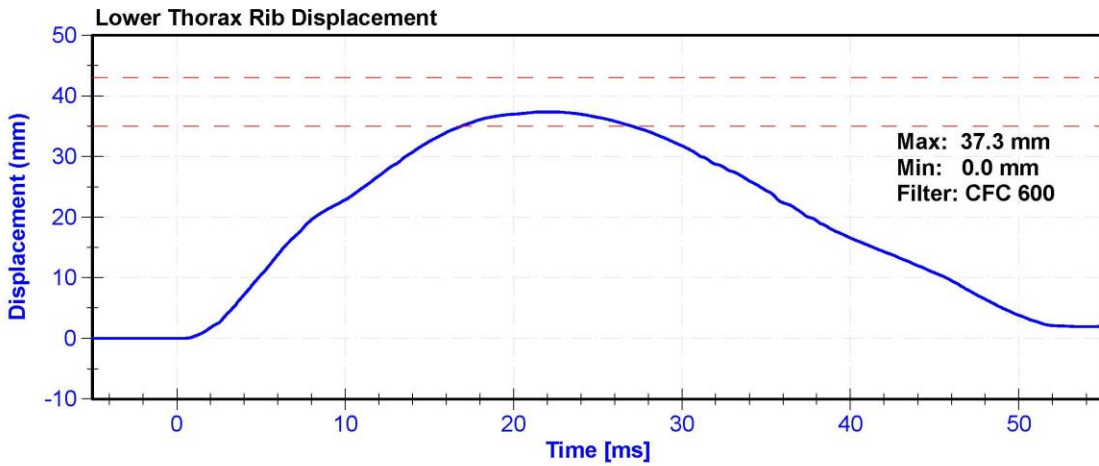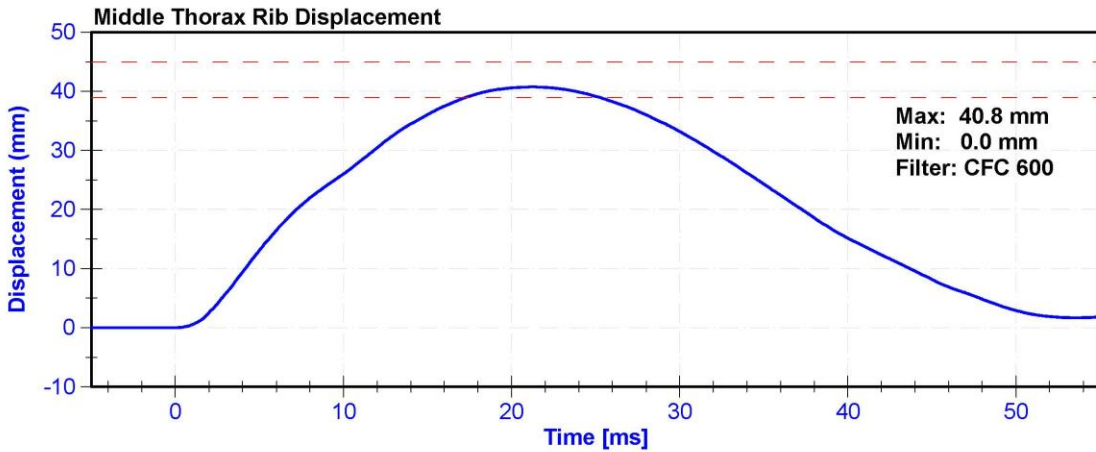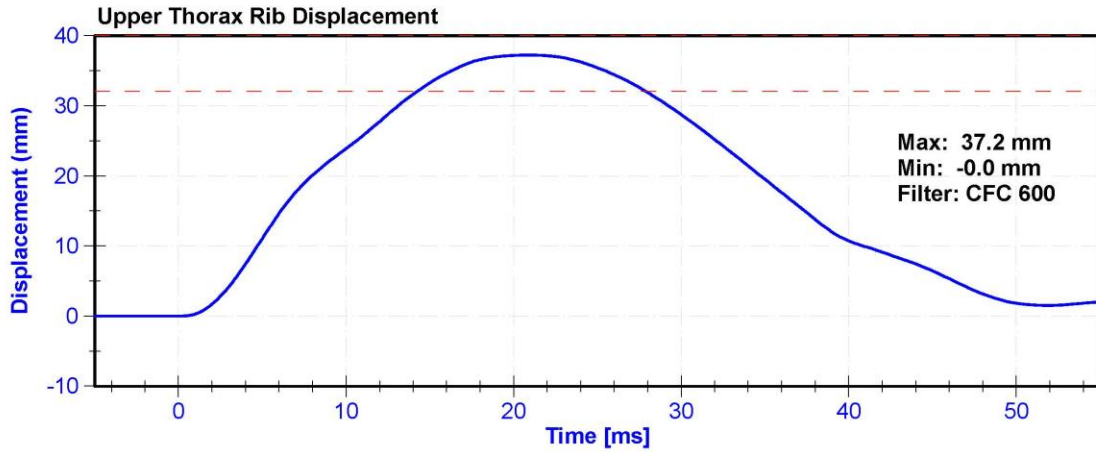

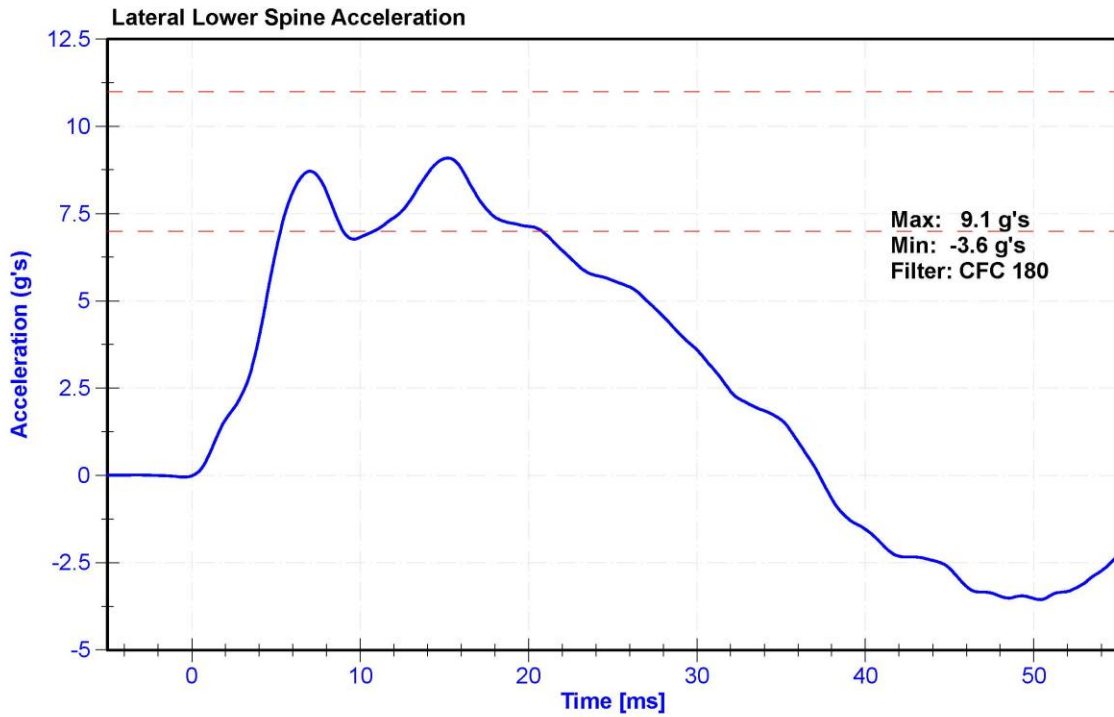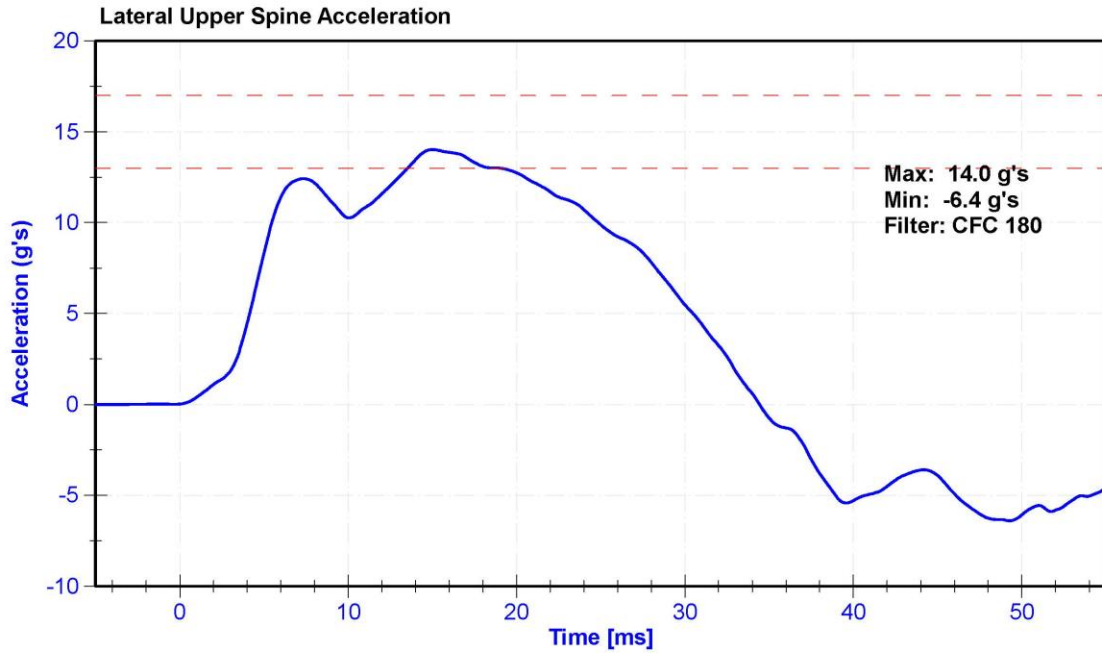


ATD Manufacturer	FTSS	Test Technician	D. Reinhard
ATD Serial Number	DG8012	Laboratory Supervisor	K. Brogan



**Results**


Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	20.7	Pass
Humidity	10	70	%	32.0	Pass
Velocity	4.2	4.4	m/s	4.26	Pass
Probe Acceleration	12	16	g's	14.9	Pass
Lateral Lower Spine Acceleration	9	14	g's	10.2	Pass
Upper Abdomen Rib Deflection	36	47	mm	41.3	Pass
Lower Abdomen Rib Deflection	33	44	mm	38.8	Pass

**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Probe Accelerometer	MSI 64C-2000	A279031	5/8/2020	5/8/2021
Lower Spine Y Accelerometer	ENDEVCO 7264C	AC-P51327	11/5/2020	5/6/2021
Upper Abdomen Rib Potentiometer	Servo 08TC1-3725	DS-008GFE	11/6/2020	5/7/2021
Lower Abdomen Rib Potentiometer	Servo 08TC1-3745	DS-1774GFE	11/6/2020	5/7/2021

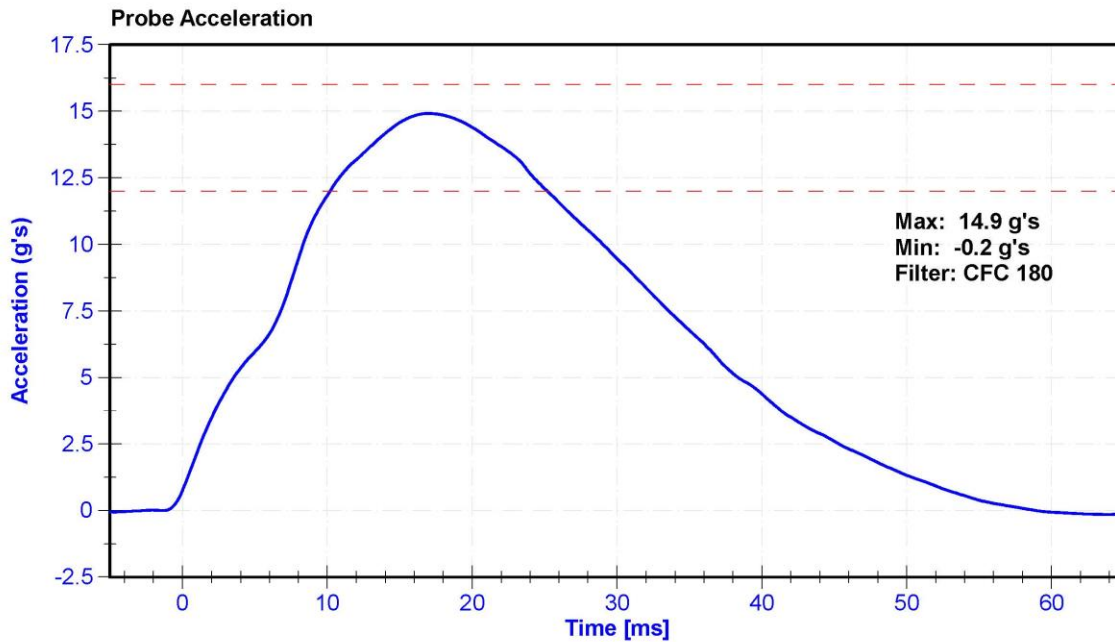

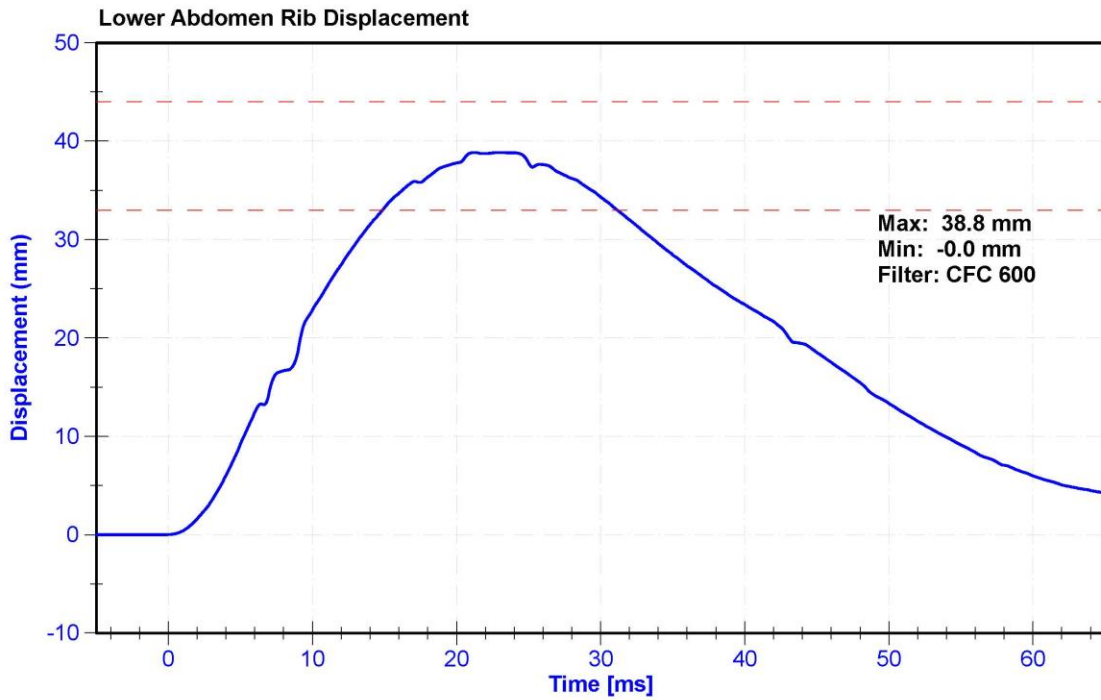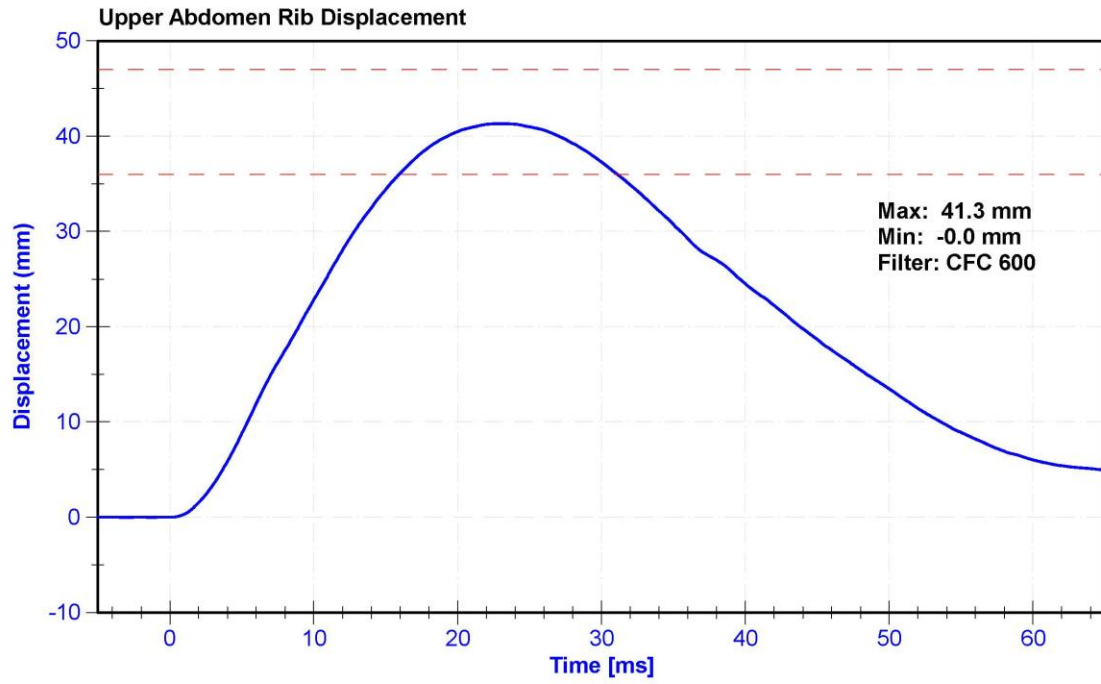

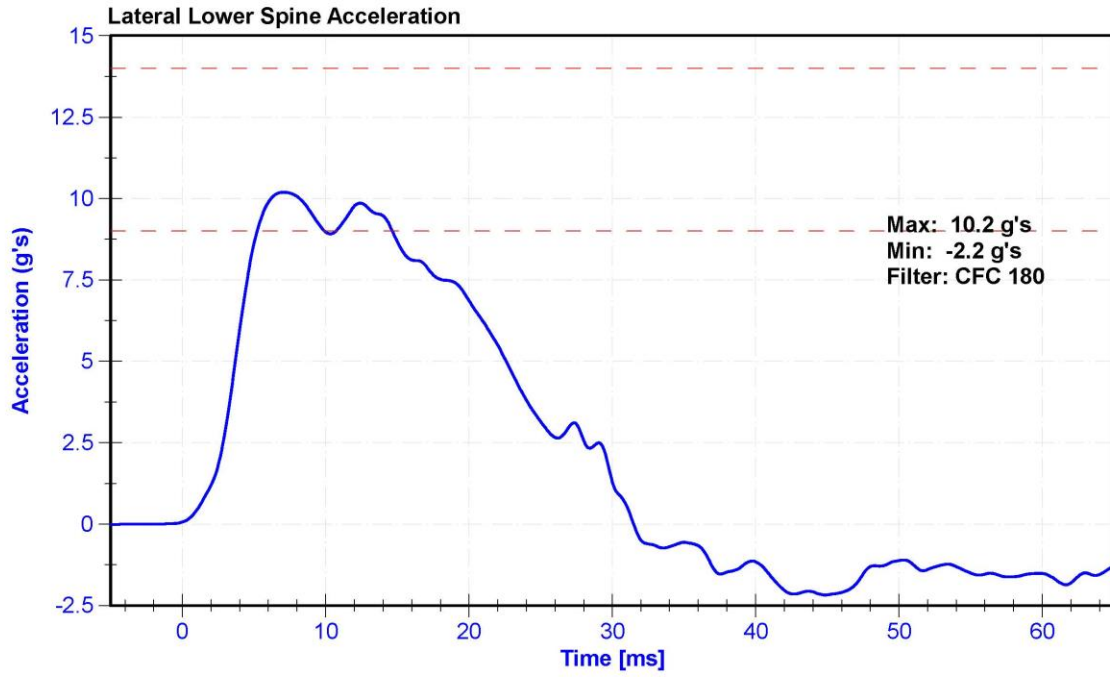




ATD Manufacturer	FTSS	Test Technician	D.Reinhard
ATD Serial Number	DG8012	Laboratory Supervisor	K. Brogan



**Results**

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	20.8	Pass
Humidity	10	70	%	28	Pass
Velocity	6.6	6.8	m/s	6.63	Pass
Probe Acceleration	38	47	g's	46.3	Pass
Lateral Pelvis Acceleration after 6ms	34	42	g's	35.6	Pass
Acetabulum Force	3600	4300	N	3976.1	Pass

**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	MSI 64C-2000	A279031	5/8/2020	5/8/2021
Pelvis Y Accelerometer	ENDEVCO 7264C	AC-P51875	11/5/2020	5/6/2021
Acetabulum Load Cell	Denton 3249J	LC-267Fy	3/19/2020	3/19/2021
Certification Plug	SACO	13346	9/19/2019	N/A
Crash Test Plug	SACO	13254	8/12/2019	N/A

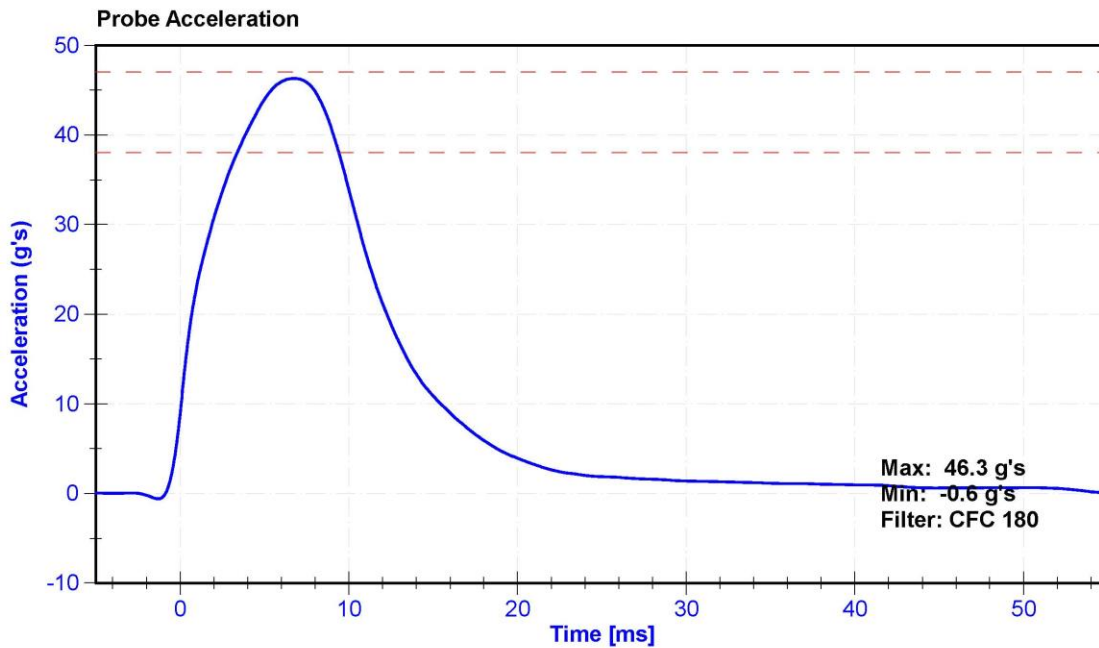

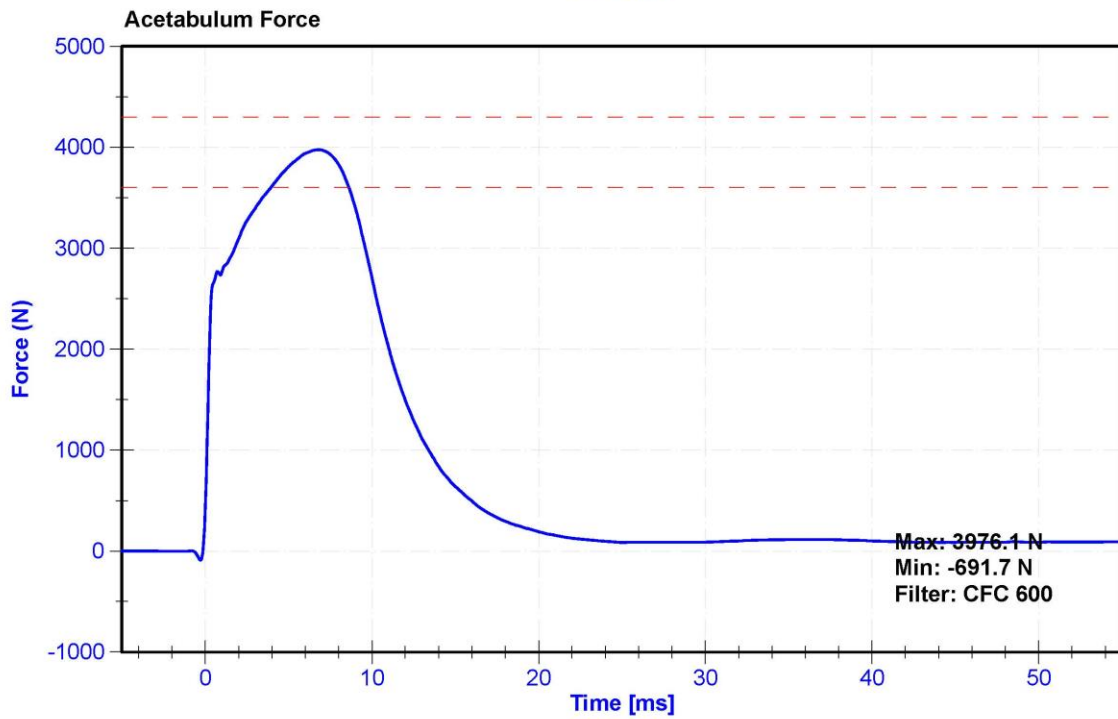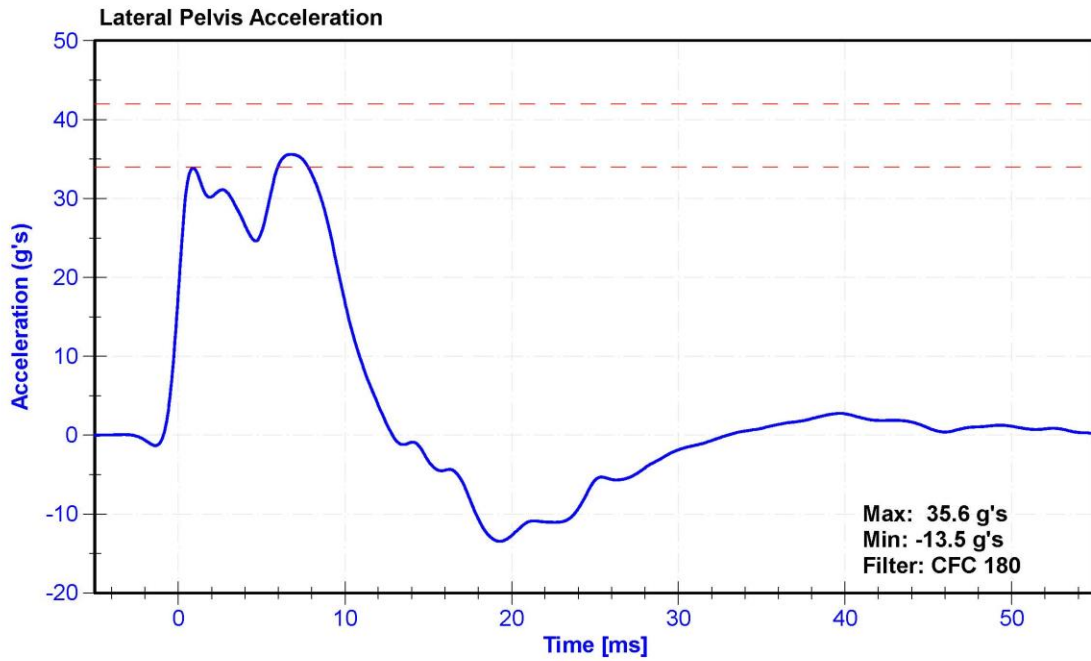




**SID-Ils Pelvis Plug Certification Test**

Plug S/N 13346  
 Test Number 10988  
 Report Number 11026

Test Date 9/19/2019 10:19:49 AM

*D68012  
 cert a  
 1/7/21*

Force (-N) vs Extension (-mm)

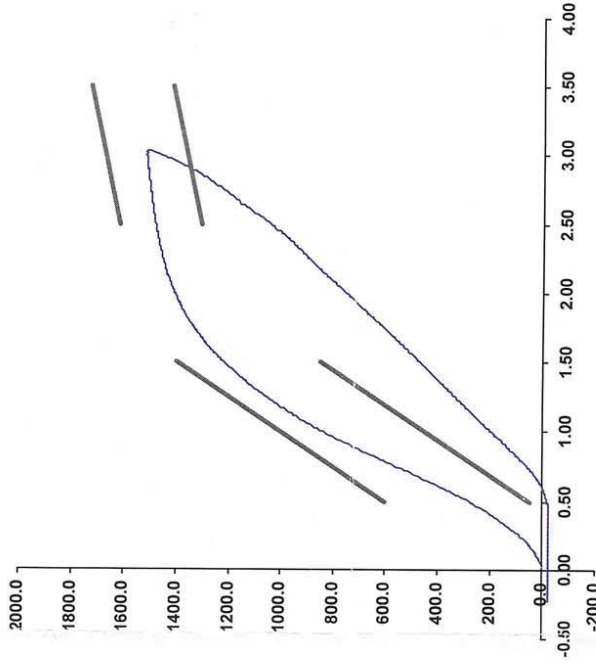

Test Results	Spec Min	Spec Max
Force @ 0.5 mm (N)	50.00	600.00
Force @ 1.5 mm (N)	850.00	1,400.00
Force @ 2.5 mm (N)	1,306.00	1,618.00
Force @ 3.0 mm (N)	1,361.00	1,673.00

Testing Machine STM-20 5965541  
 Load Cell S/N (F1360947), Units (LBS) 1000  
 Crosshead Speed ( mm / min ) or Rat 12.7  
 Extension or Position Measured by XHD\_100 ( XHD100 )

Notes:

Operator  
 Part Number 180-4450

Template No 107  
 SACO Research

19-Sep-19

By: *DC* Date: *9/19/2019*

SACO Research 41735 Elm St, #401 Murrieta, CA 92562 Tel 310-694-2082 FAX




CRASH  
LEFT Side

### SID-11s Pelvis Plug Certification Test

Plug S/N 13254  
Test Number 10676  
Report Number 10713  
Test Date 8/12/2019 9:53:15 AM

Force (-N) vs Extension (-mm)

Test Results	Spec Min	Spec Max
Force @ 0.5 mm (N)	294.78	50.00
Force @ 1.5 mm (N)	1,237.51	850.00
Force @ 2.5 mm (N)	1,486.32	1,306.00
Force @ 3.0 mm (N)	1,523.45	1,361.00

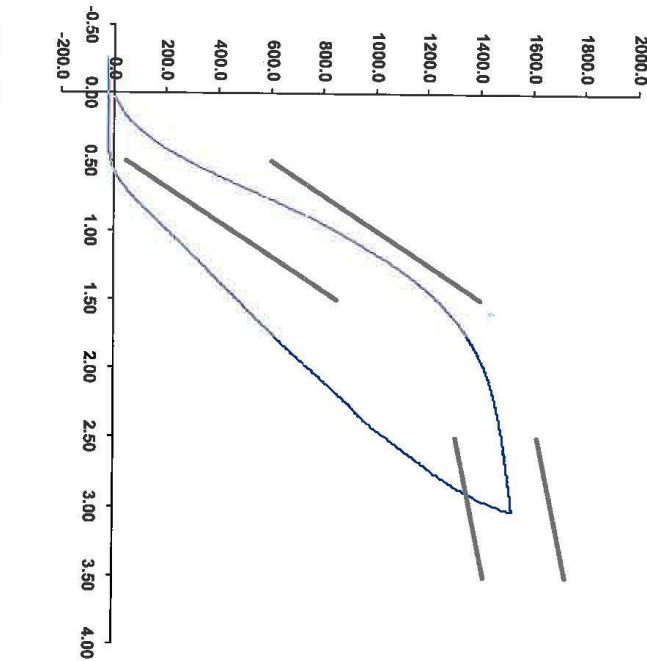

Testing Machine STM-20 5965642  
Load Cell S/N (F1360947), Units (LBS) 1000  
Crosshead Speed (mm / min) or Rate 12.7  
Extension or Position Measured by XHD\_100 (XHD100)

Notes:

Operator \_\_\_\_\_

Part Number 180-4450

Template No 107 12-Aug-19  
SACO Research

By: *DE* Date: *8/12/2019*  
SACO Research 41735 Elm St, #401 Murrieta, CA 92562 Tel 310-894-2082 FAX



NEW IMPACT

### SID-115 Pelvis Plug Certification Test


Force (-N) vs Extension (-mm)

Plug S/N 13305  
Test Number 10728  
Report Number 10765  
Test Date 8/12/2019 2:14:51 PM

Test Results	Spec Min	Spec Max
Force @ 0.5 mm (N)	50.00	600.00
Force @ 1.5 mm (N)	850.00	1,400.00
Force @ 2.5 mm (N)	1,306.00	1,618.00
Force @ 3.0 mm (N)	1,361.00	1,673.00

Testing Machine STM-20 5965542  
Load Cell S/N (F1360947), Units (LBS) 1000  
Crossthead Speed (mm / min ) or Rat 12.7  
Extension or Position Measured by XHD\_100 (XHD100)

Notes:

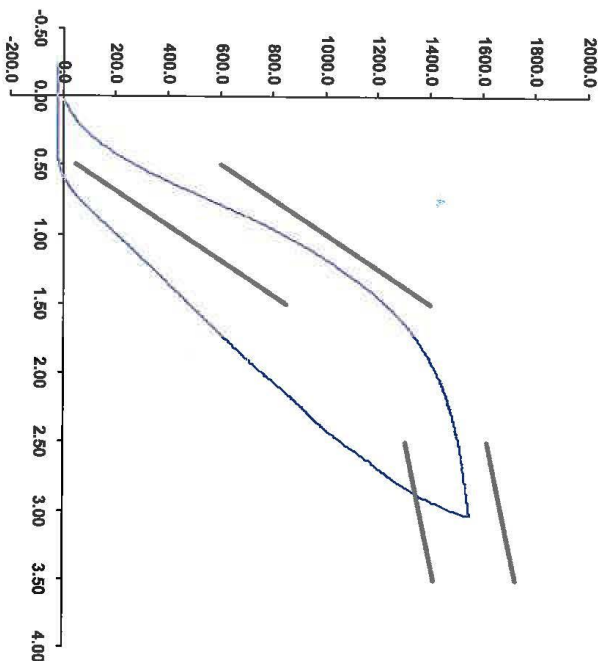

Operator

Part Number 180-4450

Template No 107 12-Aug-19  
SACO Research

By: DC Date: 8/12/2019  
SACO Research 41735 Elm St, #401 Murrieta, CA 92562 Tel 310-694-2082 FAX


ATD Manufacturer	FTSS	Test Technician	D.Reinhard
ATD Serial Number	DG8012	Laboratory Supervisor	K. Brogan



**Results**

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	20.6	Pass
Humidity	10	70	%	29.0	Pass
Velocity	4.2	4.4	m/s	4.33	Pass
Probe Acceleration	36	45	g's	40.4	Pass
Lateral Pelvis Acceleration	28	39	g's	32.2	Pass
Iliac Force	4100	5100	N	4311.3	Pass

**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	MSI 64C-2000	A279031	5/8/2020	5/8/2021
Pelvis Y Accelerometer	ENDEVCO 7264C	AC-P51875	11/5/2020	5/6/2021
Iliac Load Cell	DENTON 3228J	LC-290Fy	11/16/2020	11/16/2021

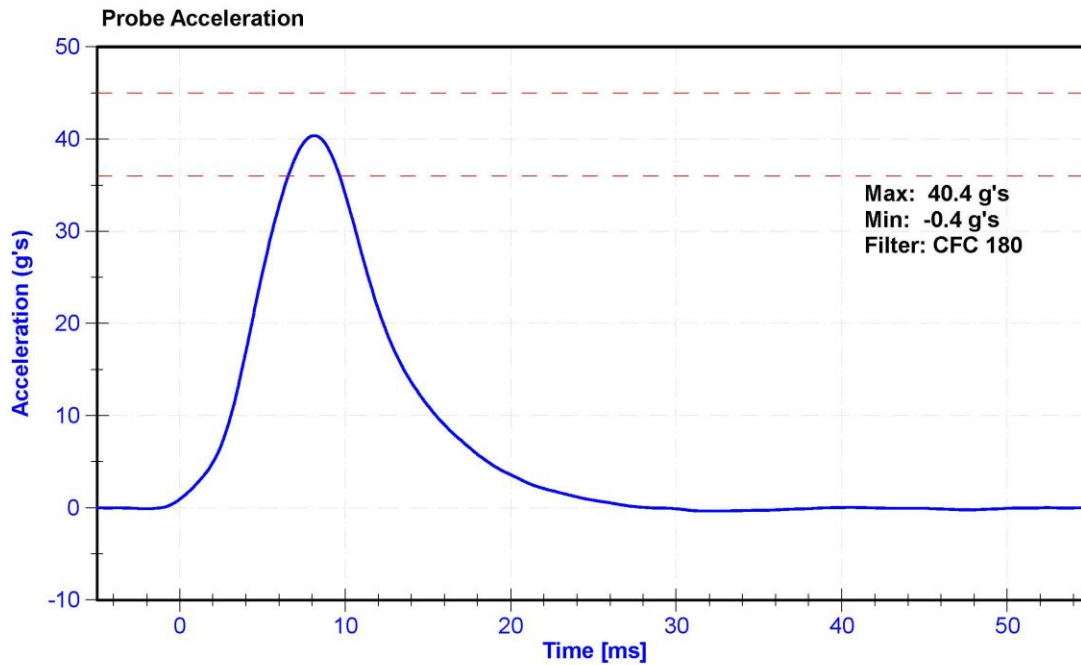

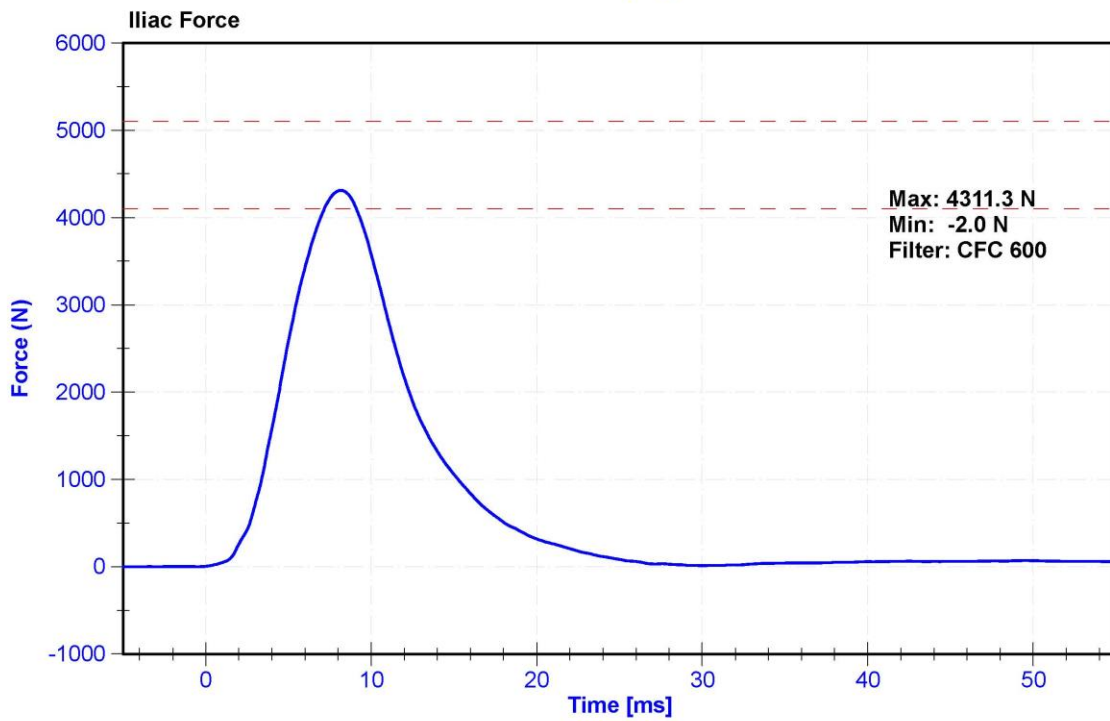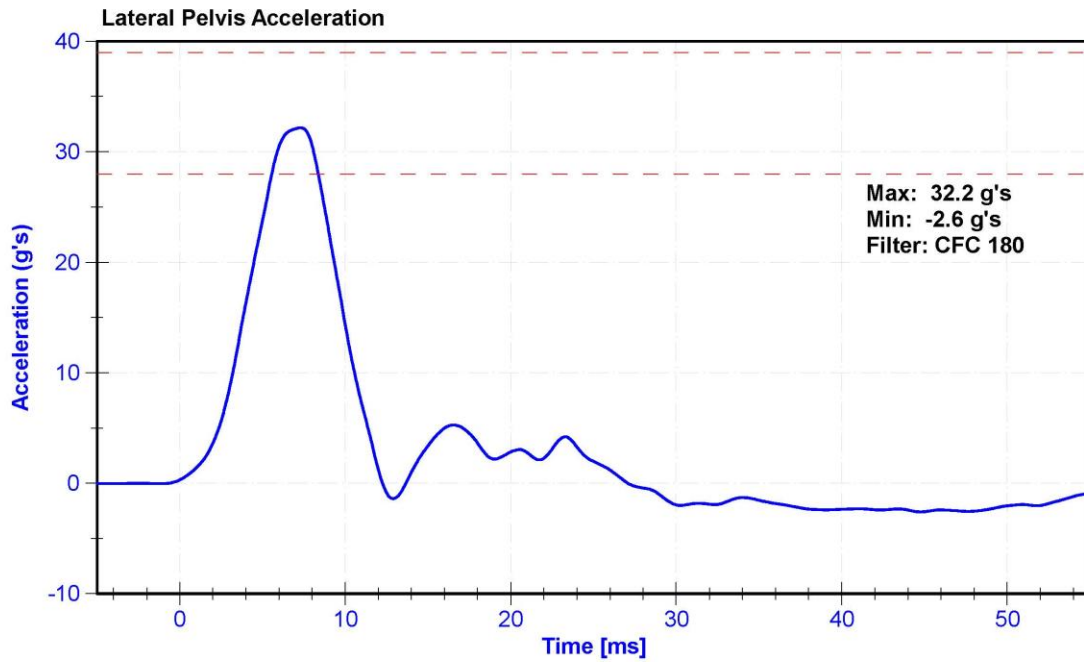

**APPENDIX D**

**TEST EQUIPMENT AND INSTRUMENTATION CALIBRATION DATA**



**Table 1 – Dummy Instrumentation (ES-2re)**

			ES-2re S/N: F033		
			Serial Number	Manufacturer	Calibration Date
Head Accelerometers	Primary	X	AC-P63861	ENDEVCO	11/24/2020
		Y	AC-P49216	ENDEVCO	11/24/2020
		Z	AC-P51303	ENDEVCO	11/24/2020
	Redundant	X	AC-P58868	ENDEVCO	11/24/2020
		Y	AC-P16755	ENDEVCO	11/24/2020
		Z	AC-P52132	ENDEVCO	11/24/2020
Thorax Rib Displacement Potentiometers	Upper	Y	DS-179GFE	Honeywell	11/25/2020
	Middle	Y	DS-185GFE	Honeywell	11/25/2020
	Lower	Y	DS-178GFE	Honeywell	11/25/2020
Abdomen Load Cells	Forward	Y	26311512 GFE	DENTON	3/19/2020
	Middle	Y	26311526 GFE	DENTON	3/19/2020
	Rear	Y	26311516 GFE	DENTON	3/19/2020
Lower Spine Accelerometers (T12)		X	AC-P52009	ENDEVCO	11/24/2020
		Y	AC-P49163	ENDEVCO	11/24/2020
		Z	AC-P52033	ENDEVCO	11/24/2020
Pubic Symphysis Load Cell		Y	LC-464fy	DENTON	7/23/2020

**Table 2 – Dummy Instrumentation (SID-IIs)**

			SID-IIs S/N: DG8012			
			Serial Number	Manufacturer	Calibration Date	
Head Accelerometers	Primary	X	AC-P74788	ENDEVCO	11/5/2020	
		Y	AC-P83432	ENDEVCO	11/5/2020	
		Z	AC-P83319	ENDEVCO	11/5/2020	
	Redundant	X	AC-P80334	ENDEVCO	11/5/2020	
		Y	AC-P52155	ENDEVCO	11/5/2020	
		Z	AC-P83322	ENDEVCO	11/5/2020	
Displacement Potentiometers	Thoracic Rib	Upper	Y	DS-2165GFE	Servo	11/6/2020
		Middle	Y	DS-45 GFE	Servo	11/6/2020
		Lower	Y	DS-011GFE	Servo	11/6/2020
	Abdominal Rib	Upper	Y	DS-008GFE	Servo	11/6/2020
		Lower	Y	DS-1774GFE	Servo	11/6/2020
Lower Spine Accelerometers (T12)		X	AC-P71272	ENDEVCO	11/5/2020	
		Y	AC-P51327	ENDEVCO	11/5/2020	
		Z	AC-P52067	ENDEVCO	11/5/2020	
Acetabulum Load Cell		Y	LC-267Fy	DENTON	3/19/2020	
Iliac Wing Load Cell		Y	LC-290Fy	DENTON	11/16/2020	
Pelvis Plug (struck side)			13481	SACO	9/23/2019	
Pelvis Plug (non-struck side)			13475	SACO	9/23/2019	

**Table 3 – Vehicle Instrumentation**

Vehicle Instrumentation			Serial Number	Manufacturer	Calibration Date
1	Vehicle Center of Gravity	X	A290920	Measurement Specialties	11/5/2020
	Vehicle Center of Gravity	Y	A290930	Measurement Specialties	11/5/2020
	Vehicle Center of Gravity	Z	A315790	Measurement Specialties	7/21/2020
2	Right Sill at Front Seat	X	A281006	Measurement Specialties	7/21/2020
	Right Sill at Front Seat	Y	A281042	Measurement Specialties	7/21/2020
	Right Sill at Front Seat	Z	A315914	Measurement Specialties	10/19/2020
3	Right Sill at Rear Seat	X	A315025	Measurement Specialties	8/7/2020
	Right Sill at Rear Seat	Y	A315759	Measurement Specialties	8/7/2020
	Right Sill at Rear Seat	Z	A315777	Measurement Specialties	8/7/2020
4	Left Sill at Front Door	Y	A352396	Measurement Specialties	9/26/2020
5	Left Sill at Rear Door	Y	A280024	Measurement Specialties	11/4/2020
6	Left A-Post Lower	Y	A315911	Measurement Specialties	7/22/2020
7	Left A-Post Middle	Y	A280937	Measurement Specialties	10/21/2020
8	Left B-Post Lower	Y	A280407	Measurement Specialties	12/21/2020
9	Left B-Post Middle	Y	A290953	Measurement Specialties	10/6/2020
10	Front Seat Track	Y	A280906	Measurement Specialties	12/21/2020
11	Rear Seat Track or Structure	Y	A335452	Measurement Specialties	10/17/2020
12	Right Rear Occ. Compartment	Y	A352370	Measurement Specialties	9/26/2020
13	Engine Block	X	A315190	Measurement Specialties	7/24/2020
	Engine Block	Y	A315867	Measurement Specialties	7/24/2020
14	Rear Floorpan Above Axle	X	A284329	Measurement Specialties	8/7/2020
	Rear Floorpan Above Axle	Y	A315787	Measurement Specialties	8/7/2020
	Rear Floorpan Above Axle	Z	A315846	Measurement Specialties	8/7/2020

**TABLE 4 – MDB Instrumentation**

<b>MDB Instrumentation</b>		<b>Serial Number</b>	<b>Manufacturer</b>	<b>Calibration Date</b>
MDB Center of Gravity	X	A255861	Measurement Specialties	7/23/2020
MDB Center of Gravity	Y	A279987	Measurement Specialties	7/22/2020
MDB Center of Gravity	Z	A283608	Measurement Specialties	7/21/2020
Left Frame at Rear Axle Centerline	X	A315983	Measurement Specialties	10/5/2020
Left Frame at Rear Axle Centerline	Y	A290947	Measurement Specialties	10/5/2020