

**REPORT NUMBER: NCAP-CAL-21-003**

**NEW CAR ASSESSMENT PROGRAM (NCAP)  
FRONTAL BARRIER IMPACT TEST**

**Nissan Motor Co. LTD.  
2021 Nissan Rogue  
SUV**

**NHTSA No: M20215202**

**PREPARED BY:  
CALSPAN CORPORATION  
P.O. BOX 400  
BUFFALO, NEW YORK 104625**



**March 5, 2021**

**FINAL REPORT**

**PREPARED FOR:  
U. S. DEPARTMENT OF TRANSPORTATION  
NATIONAL HIGHWAY TRAFFIC SAFETY ADMINISTRATION  
OFFICE OF CRASHWORTHINESS STANDARDS  
1200 NEW JERSEY AVE SE, ROOM W43-410  
WASHINGTON, D.C. 20590**

This final test report was prepared for the U.S. Department of Transportation, National Highway Traffic Administration, in response to Contract Number 693JJ919D000005.

This publication is distributed by the U.S. Department of Transportation, National Highway Traffic Safety Administration, in the interest of information exchange. The opinions, findings and conclusions expressed in this publication are those of the author(s) and not necessarily those of the Department of Transportation or the National Highway Traffic Safety Administration. The United States Government assumes no liability for its contents or use thereof.

If trade or manufacturers' names or products are mentioned it is only because they are considered essential to the object of the publication and should not be construed as an endorsement. The United States Government does not endorse products or manufacturers.

Prepared by: Matthew Pronko  
Matthew Pronko, Test Engineer

Date: March 5, 2021

Approved by: Vanessa Hansen  
Vanessa Hansen, Operations Manager

Date: March 5, 2021

**FINAL REPORT ACCEPTANCE BY OCWS:**

\_\_\_\_\_  
Division Chief, New Car Assessment Program  
NHTSA, Office of Crashworthiness Standards

Date: \_\_\_\_\_

\_\_\_\_\_  
COTR, New Car Assessment Program  
NHTSA, Office of Crashworthiness Standards

Date: \_\_\_\_\_

**TECHNICAL REPORT DOCUMENTATION PAGE**

<b>1. Report No.</b> NCAP-CAL-21-003		<b>2. Government Accession No.</b>		<b>3. Recipient's Catalog No.</b>																																																					
<b>4. Title and Subtitle</b> Final Report of New Car Assessment Program Frontal Impact Testing of a 2021 Nissan Rogue SUV NHTSA No.: M20215202				<b>5. Report Date</b> March 5, 2021																																																					
				<b>6. Performing Organization Code</b> CAL																																																					
<b>7. Author(s)</b> Matthew Pronko, Test Engineer Vanessa Hansen, Operations Manager				<b>8. Performing Organization Report No.</b> CAL-DOT-2021-003																																																					
<b>9. Performing Organization Name and Address</b> Calspan Corporation Transportation Test Operations P.O. Box 400 Buffalo, New York 104625				<b>10. Work Unit No.</b>																																																					
				<b>11. Contract or Grant No.</b> 693JJ919D000005																																																					
<b>12. Sponsoring Agency Name and Address</b> U.S. Department of Transportation National Highway Traffic Safety Administration Office of Crashworthiness Standards 1200 New Jersey Ave., SE, Room W43-410 Washington, D.C. 20590				<b>13. Type of Report and Period Covered:</b> Final Test Report January 5, 2021 - March 5, 2021																																																					
				<b>14. Sponsoring Agency Code</b> NRM-100																																																					
<b>15. Supplementary Notes</b>																																																									
<b>16. Abstract</b> A 56.30 km/h (35 mph), NCAP frontal rigid barrier impact test was conducted on a 2021 Nissan Rogue SUV in accordance with the specifications of the Office of Crashworthiness Standards Laboratory Procedure for NCAP Full Frontal Rigid Barrier Impact Testing. This test was conducted to obtain data related to FMVSS Nos. 208, 212, 219 (partial), 301 performance. The test was conducted at Calspan Corporation's Transportation Test Operations facility in Buffalo, New York on January 5, 2021.  The impact velocity of the vehicle was 56.28 km/h, and the ambient temperature at the barrier face at the time of impact was 21°C. The target vehicle post-test maximum crush was 350 mm at C3 to the left side of the front bumper. The test vehicle's occupant performance data is as follows:																																																									
<table border="1"> <thead> <tr> <th rowspan="2">Measurement Description</th> <th rowspan="2">Units</th> <th colspan="2">Driver ATD (Serial No. 142)</th> <th colspan="2">Passenger ATD (Serial No. 140)</th> </tr> <tr> <th>Threshold</th> <th>Result</th> <th>Threshold</th> <th>Result</th> </tr> </thead> <tbody> <tr> <td>Head Injury Criteria (HIC<sub>15</sub>)</td> <td></td> <td>700</td> <td>305.980</td> <td>700</td> <td>346.885</td> </tr> <tr> <td>Maximum Chest Compression</td> <td>mm</td> <td>63</td> <td>-25.857</td> <td>52</td> <td>-21.818</td> </tr> <tr> <td>Nij</td> <td></td> <td>1</td> <td>0.304</td> <td>1</td> <td>0.690</td> </tr> <tr> <td>Neck Tension</td> <td>N</td> <td>4,170</td> <td>1880.560</td> <td>2,620</td> <td>1380.526</td> </tr> <tr> <td>Neck Compression</td> <td>N</td> <td>4,000</td> <td>-323.790</td> <td>2,520</td> <td>-170.025</td> </tr> <tr> <td>Left Femur Force</td> <td>N</td> <td>10,008</td> <td>-1208.803</td> <td>6,805</td> <td>-3117.744</td> </tr> <tr> <td>Right Femur Force</td> <td>N</td> <td>10,008</td> <td>-1627.837</td> <td>6,805</td> <td>-1739.487</td> </tr> </tbody> </table>						Measurement Description	Units	Driver ATD (Serial No. 142)		Passenger ATD (Serial No. 140)		Threshold	Result	Threshold	Result	Head Injury Criteria (HIC <sub>15</sub> )		700	305.980	700	346.885	Maximum Chest Compression	mm	63	-25.857	52	-21.818	Nij		1	0.304	1	0.690	Neck Tension	N	4,170	1880.560	2,620	1380.526	Neck Compression	N	4,000	-323.790	2,520	-170.025	Left Femur Force	N	10,008	-1208.803	6,805	-3117.744	Right Femur Force	N	10,008	-1627.837	6,805	-1739.487
Measurement Description	Units	Driver ATD (Serial No. 142)		Passenger ATD (Serial No. 140)																																																					
		Threshold	Result	Threshold	Result																																																				
Head Injury Criteria (HIC <sub>15</sub> )		700	305.980	700	346.885																																																				
Maximum Chest Compression	mm	63	-25.857	52	-21.818																																																				
Nij		1	0.304	1	0.690																																																				
Neck Tension	N	4,170	1880.560	2,620	1380.526																																																				
Neck Compression	N	4,000	-323.790	2,520	-170.025																																																				
Left Femur Force	N	10,008	-1208.803	6,805	-3117.744																																																				
Right Femur Force	N	10,008	-1627.837	6,805	-1739.487																																																				
<b>17. Key Words</b> 56.3 km/h (35 mph) Full Frontal Rigid Barrier Impact Test New Car Assessment Program (NCAP)				<b>18. Distribution Statement</b> Copies of this report are available from: National Highway Traffic Safety Administration Technical Information Services Division 1200 New Jersey Ave, SE Washington, DC 20590																																																					
<b>19. Security Class. (of this report)</b>  UNCLASSIFIED		<b>20. Security Class. (of this page)</b>  UNCLASSIFIED		<b>21. No. of Pages</b>  168	<b>22. Price</b>																																																				

## TABLE OF CONTENTS

<u>Section</u>		<u>Page</u>
1	Purpose and Summary of the Test	1-1
2	Occupant and Vehicle Information / Data Sheets	2-1
<u>Data Sheet</u>		<u>Page</u>
1	General Test and Vehicle Parameter Data	2-2
2	Seat Adjustment, Fuel System, and Steering Wheel Data	2-6
3	Dummy Longitudinal Clearance Dimensions	2-8
4	Dummy Lateral Clearance Dimensions	2-9
5	Seat Belt Positioning Data	2-10
6	High-Speed Camera Locations and Data	2-11
7	Vehicle Accelerometer Locations	2-13
8	Photographic Reference Target Locations	2-14
9	Load Cell Locations on Fixed Barrier	2-15
10	Test Vehicle Summary of Results	2-16
11	Post-Test Observations	2-17
12	Vehicle Profile Measurements	2-18
13	Accident Investigation Division Data	2-20
14	Vehicle Intrusion Measurements	2-21
15	Summary of Indicant FMVSS No.212 and FMVSS No.219 (Partial) Data	2-23
16	FMVSS 301 Barrier Impact & Static Rollover Results	2-25
17	Dummy/Vehicle Temperature Stabilization Chart	2-26
<u>Appendix</u>		<u>Page</u>
A	Photographs	A-1
B	Dummy Response Data Traces	B-1
C	Dummy Calibration and Performance Verification Data	C-1
D	Test Equipment and Instrumentation Calibration	D-1

## SECTION 1

### PURPOSE AND SUMMARY OF TEST

#### PURPOSE

This 56.3 km/h frontal barrier impact test is part of the Vehicle Barrier Impact Testing Program sponsored by the National Highway Traffic Safety Administration (NHTSA) under Contract No. 693JJ919D000005. The purpose of this test was to obtain vehicle crashworthiness and occupant restraint system performance data for consumer information purposes.

The 56.3 km/h frontal barrier impact test was conducted in accordance with the Office of Crashworthiness Standards Laboratory Procedure for NCAP Full Frontal Rigid Barrier Impact Testing.

#### SUMMARY

A load cell barrier consisting of 128 load cells was impacted by a 2021 Nissan Rogue SUV at a velocity of 56.28 km/h. The test was performed at Calspan Corporation's Transportation Test Operations facility in Buffalo, New York on January 5, 2021. Pre- and post-test photographs of the vehicle and dummies to document the test can be found in Appendix A. One real-time camera and 16 high-speed cameras were used to document the frontal barrier impact event. Camera locations and other pertinent camera information can be found in Data Sheet 6 of this report.

One Part 572E, 50th percentile male anthropomorphic test device (ATD), was placed in the driver seating position and one Part 572O 5th percentile female ATD was placed in the right-front passenger seating position according to dummy placement instructions specified in the Laboratory Procedure for NCAP Full Frontal Rigid Barrier Impact Testing. Both ATDs were fully instrumented with head, chest and pelvis tri-axial accelerometers, chest displacement potentiometers, upper neck transducers, femur load cells, and lower leg instrumentation. The driver (position 1) ATD (Serial No. 142) and the right-front passenger (position 2) ATD (Serial No. 140) were qualified prior to this test. Certification details, along with instrumentation calibration data, can be found in Appendix C of this report.

The 486 channels of data were recorded on an on-board data acquisition system. Appendix B contains the vehicle, load cell barrier and dummy response data traces.

There was 100 percent windshield retention and no intrusion into the protected zone of the windshield during the event. There was a total of 0.0 grams of stoddard solvent leakage after the event or during any phase of the static rollover. The maximum static crush of the vehicle was 350 mm and both driver and passenger side doors remained closed during the impact event and were operable after the impact.

The driver's visible contact points were as follows: The driver's head contacted the frontal airbag and then the head restraint. The upper torso contacted the frontal airbag. Both knees contacted the knee air bag.

The passenger's visible contact points were as follows: The passenger's head contacted the frontal airbag and then the head restraint. The upper torso contacted the frontal airbag. Both knees contacted the knee airbag

The occupant data is summarized below.

ATD Position	HIC <sub>15</sub>	Nij	Neck Tension (N)	Neck Comp. (N)	3ms Chest Clip (Gs)	Chest Disp. (mm)	Left Femur (N)	Right Femur (N)
Driver (50 <sup>th</sup> )	305.980	0.304	1880.560	-323.790	42.319	-25.857	-1208.803	-1627.837
Passenger (5 <sup>th</sup> )	346.885	0.690	1380.526	-170.025	40.728	-21.818	-3117.744	-1739.487

**GENERAL COMMENTS:**

1. P1 (Driver) serial number - 142
2. P2 (Passenger) serial number - 140

**Data Anomalies:**

- Bottom of Engine X, Exceeded calibration range and saturated at 17.8 ms
- Driver Shoulder Belt Upper Force Not Used
- Front Right Passenger Shoulder Belt Upper Force Not Used
- Driver Left Lower Tibia Z Force, Minor Questionable Data Spikes
- BARRIER D-03 FX – Questionable Data
- BARRIER H-01 Fx, Channel Failed
- BARRIER H-01 My, Channel Failed
- BARRIER H-01 Mz, Channel Failed

## **SECTION 2**

### **OCCUPANT AND VEHICLE INFORMATION / DATA SHEETS**

This section contains information reporting for the following Data Sheets:

Data Sheet No. 1 – General Test and Vehicle Parameter Data

Data Sheet No. 2 – Seat Adjustment, Fuel System, and Steering Wheel Data

Data Sheet No. 3 – Dummy Longitudinal Clearance Dimensions

Data Sheet No. 4 – Dummy Lateral Clearance Dimensions

Data Sheet No. 5 – Seat Belt Positioning Data

Data Sheet No. 6 – High-Speed Camera Locations and Data

Data Sheet No. 7 – Vehicle Accelerometer Locations

Data Sheet No. 8 – Photographic Reference Target Locations

Data Sheet No. 9 – Load Cell Locations on Fixed Barrier

Data Sheet No. 10 – Test Vehicle Summary of Results

Data Sheet No. 11 – Post-Test Observations

Data Sheet No. 12 – Vehicle Profile Measurements

Data Sheet No. 13 – Accident Investigation Division Data

Data Sheet No. 14 – Vehicle Intrusion Measurements

Data Sheet No. 15 – Summary of Indicant FMVSS No. 212 and FMVSS No. 219 (Partial)

Data Sheet No. 16 – FMVSS 301 Barrier Impact and Static Rollover Results

Data Sheet No. 17 – Dummy/Vehicle Temperature Stabilization Chart

**DATA SHEET NO. 1  
GENERAL TEST AND VEHICLE PARAMETER DATA**

Test Vehicle: 2021 Nissan Rogue SUV  
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20215202  
 Test Date: 1/5/2021

**TEST VEHICLE INFORMATION AND OPTIONS**

NHTSA No.	M20215202	Traction Control System (TCS)	Yes
Model Year	2021	Power Steering	Yes
Make	Nissan	Power Window Auto-Reverse	No
Model	Rogue	Driver Frontal Airbag	Yes
Body Style	SUV	Driver Curtain Airbag	Yes
VIN	JN8AT3ABXMW205037	Driver Head/Torso Airbag	No
Body Color	Blue	Driver Torso Airbag	No
Odometer Reading (km /mi)	91	Driver Torso/Pelvis Airbag	Yes
Engine Displacement (L)	2.5	Driver Pelvis Airbag	No
Type / No. Cylinders	I4	Driver Knee Airbag	Yes
Engine Placement	Transverse	Front Pass. Frontal Airbag	Yes
Transmission Type	Automatic	Front Pass. Curtain Airbag	Yes
Transmission Speeds	CVT	Front Pass. Head/Torso Airbag	No
Overdrive	Yes	Front Pass. Torso Airbag	No
Final Drive	AWD	Front Pass. Torso/Pelvis Airbag	Yes
Roof Rack	No	Front Pass. Pelvis Airbag	No
Sunroof / T-Top	No	Front Pass. Knee Airbag	Yes
Running Boards	No	Driver Pretensioner	Yes
Tilt Steering Wheel	Yes	Driver Load Limiter	Yes
Power Seats	No	Front Pass. Pretensioner	Yes
Anti-Lock Brakes (ABS)	Yes	Front Pass. Load Limiter	Yes
Automatic Door Locks (ADLs)	Yes	Other –	-

Does owner's manual provide instructions to turn off automatic door locks?

No

**DATA FROM CERTIFICATION LABEL**

Manufactured By	Nissan Motor Co.	GVWR (kg)	4619
Date of Manufacture	09/20	GAWR Front (kg)	2403
		GAWR Rear (kg)	2326

**VEHICLE SEATING AND WEIGHT CAPACITY DATA**

Measured Parameter	Front	Rear	Third	Total
Type of Seats	Bucket	Bench	N/A	
Number of Occupants	2	3	N/A	5
Capacity Wt. (VCW) (kg)				408
Cargo Wt. (RCLW) (kg)				67.8




**DATA SHEET NO. 1 ... (CONTINUED)**  
**GENERAL TEST AND VEHICLE PARAMETER DATA**

Test Vehicle: 2021 Nissan Rogue SUV  
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20215202  
 Test Date: 1/5/2021

Collect items circled in red, tire manufacturer, and tire name.

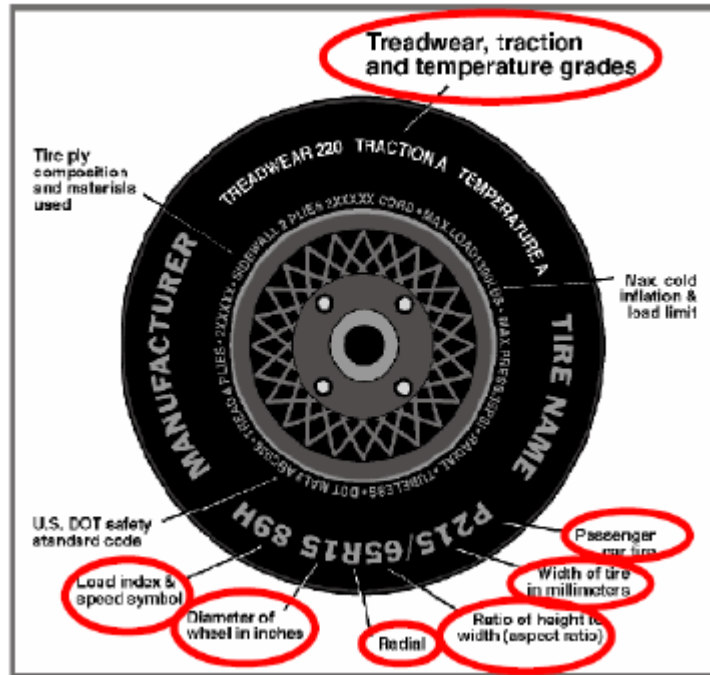

**VEHICLE TIRE INFORMATION**

Measured Parameter	Front	Rear
Maximum Tire Pressure (kPa)	350	350
Cold Pressure (kPa)	250	230
Recommended Tire Size	235/65R17	235/65R17
Tire Size on Vehicle	235/65R17	235/65R17
Tire Manufacturer	Dunlap	Dunlap
Tire Model	Grandtrek PT21	Grandtrek PT21
Treadwear	360	360
Traction	B	B
Temperature Grades	A	A
Tire Plies Sidewall	2 polyester	2 polyester
Tire Plies Body	2 Polyester, 2 Steel, 1 Polyamide	2 Polyester, 2 Steel, 1 Polyamide
Load Index / Speed Symbol	104M	104M
Tire Material	Rubber	Rubber
DOT Safety Code Left	1V4L83M9R3620	1V4L83M9R3620
DOT Safety Code Right	1V4L83M9R3620	1V4L83M9R3620

**DATA SHEET NO. 1 ... (CONTINUED)**  
**GENERAL TEST AND VEHICLE PARAMETER DATA**

Test Vehicle: 2021 Nissan Rogue SUV  
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20215202  
 Test Date: 1/5/2021

**TEST VEHICLE WEIGHTS**

	Units	As Delivered Weights (UVW)			As Tested Weights (ATW)		
		Front Axle	Rear Axle	Total	Front Axle	Rear Axle	Total
Left	kg	465	345		502	409	
Right	kg	466	321		496	392	
Ratio	%	58.3	41.7		55.5	45.5	
Totals	kg	931	666	1597	998	801	1799

**TARGET TEST WEIGHT CALCULATION**

Measured Parameter	Units	Value	
Total Delivered Weight (UVW)	kg	1597	(A)
Weight of 1 P572E ATD & 1 P572O ATD	kg	142	(B)
Rated Cargo / Luggage Weight (RCLW)	kg	67.8	(C)
Calculated Vehicle Target Weight (TVTW)	kg	1806.8	(A+B+C)

**TEST VEHICLE ATTITUDES AND CG**

Condition	Units	LF	RF	LR	RR	CG (aft of front axle)
As Delivered	mm	913	916	930	939	1128
As Tested	mm	900	912	900	912	1204
Post-Test	mm	915	930	937	947	

**GENERAL TEST VEHICLE DATA**

Measurement Description	Units	Value
Total Vehicle Wheel Base	mm	2704
Total Vehicle Length at Left Side	mm	4541
Total Vehicle Length at Centerline	mm	4648
Total Vehicle Length at Right Side	mm	4541
Weight of Ballast in Cargo Area	kg	5
Weight of Vehicle Components Removed	kg	23
Amount of Stoddard Solvent in Fuel Tank	L	54.2

**LIST OF COMPONENTS REMOVED TO MEET TEST WEIGHT:**

Trunk carpeting, spare tire, jack  
 \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_

**DATA SHEET NO.1 ... (CONTINUED)**  
**GENERAL TEST AND VEHICLE PARAMETER DATA**

Test Vehicle: 2021 Nissan Rogue SUV  
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20215202  
 Test Date: 1/5/2021

**TARGET VEHICLE STRUCTURAL MEASUREMENT**

No.	Description	Pre-Test
1	Total Length	4648
2	Total Width	1831
3*	Bumper Top Height	602
4*	Bumper Bottom Height	511
5*	Longitudinal Member Top Height	663
6	Distance Between Longitudinal Members	1016
7	Longitudinal Member Width	45
8*	Engine Top Height	918
9*	Engine Bottom Height	258
10	Engine and Gearbox Width	452
11	Front Bumper-Engine Distance	673
12*	Front Shock Absorber Fixing Height	988
13*	Bonnet Leading Edge Height	947
14	Front Shock Absorber Fixing Width	1196
15	Front Bumper – Front Axle Distance	937
16	Front Axle – A Pillar Distance	533
17	A-Pillar – B-Pillar Distance	1081
18	B-Pillar – Rear Axle Distance	1089
19	B-Pillar – C-Pillar Distance	1000
20*	Roof Sill Bottom Height	1597
21*	Roof Sill Top Height	1646
22*	Floor Sill Bottom Height	478
23*	Floor Sill Top Height	395

\*Height Measurements are taken from the ground  
 Note: All measurements are in millimeters


**DATA SHEET NO. 2  
SEAT ADJUSTMENT, FUEL SYSTEM, AND STEERING WHEEL DATA**

Test Vehicle: 2021 Nissan Rogue SUV  
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20215202  
 Test Date: 1/5/2021

**NOMINAL DESIGN RIDING POSITION**

The driver's seat back was set to the manufacturer's designated angle. The passenger's seat back was positioned in a similar manner as the driver's seat back. Seat back angles are measured at the headrest post bezel using a digital inclinometer.

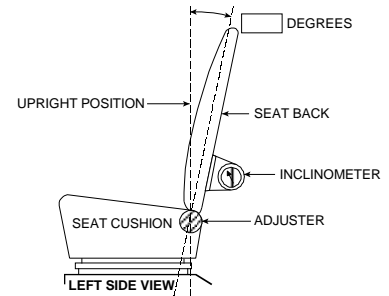

**FRONT SEAT ASSEMBLY**

Seating Position	Degrees
Driver Seat Back Angle	6.5
Passenger Seat Back Angle	2.2

**SEAT FORE / AFT POSITIONS**


The driver's seat was positioned at the mid-point of fore/aft travel at its lowest position. The passenger's seat was positioned at the most forward position of fore/aft travel. Zero is defined as the forward most position.

Seating Position	Total Fore / Aft Travel	Placed in Position #
Driver Seat	260	11
Passenger Seat	260	0

**SEAT BELT UPPER ANCHORAGE**

The driver's seat belt anchorage was positioned according to the manufacturer's designated positioning for a 50<sup>th</sup> percentile adult male ATD. The passenger's seat belt anchorage was positioned according to the manufacturer's designated positioning for a 5<sup>th</sup> percentile adult female ATD. For this test zero is defined as the uppermost position.

Seating Position	Total # of Positions	Placed in Position #
Driver Seat	4	0
Passenger Seat	4	0

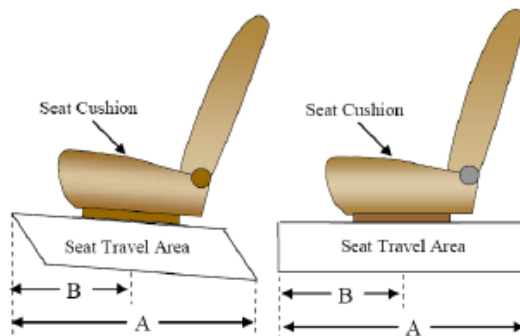

**DATA SHEET NO. 2 ... (CONTINUED)**  
**SEAT ADJUSTMENT, FUEL SYSTEM, AND STEERING WHEEL DATA**

Test Vehicle: 2021 Nissan Rogue SUV  
 Test Program: NCAP Frontal Barrier Impact Test


NHTSA No.: M20215202  
 Test Date: 1/5/2021

**FUEL TANK CAPACITY**

Description	Liters
Usable Capacity of "Standard Tank"	58.3
Usable Capacity of "Optional Tank"	-
92%-94% of Usable Capacity	53.6 – 54.8
Actual Amount of Solvent Used	54.2
1/3 of Usable Capacity	19.4


**FUEL PUMP**

The vehicle is equipped with an electric fuel pump. The fuel filler neck is on the left side of the vehicle. The pump creates positive pressure in the fuel lines, pushing the gasoline to the engine. See form 1 for more information.

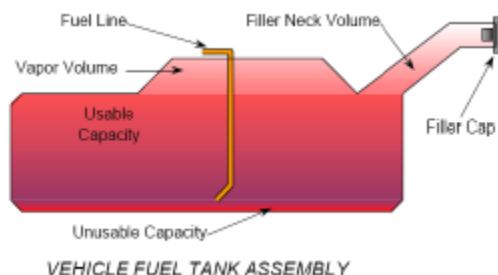

**STEERING COLUMN ADJUSTMENT**

Steering wheel and column adjustments are made so that the steering wheel hub is at the geometric center of the locus it describes when moved through its full range of motion. For angular measurements, a digital inclinometer was used to measure a plate which was placed across the steering wheel rim. A tape measure was used to measure the telescoping steering wheel travel.

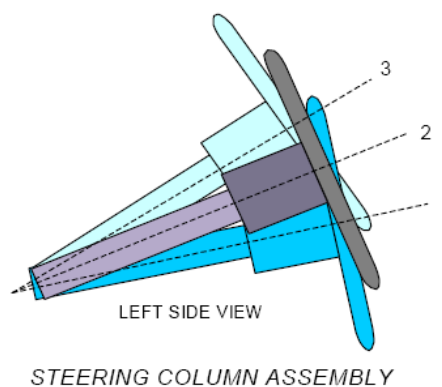


**STEERING COLUMN POSITIONS**

Description	Degrees	Fore / Aft Position (mm)
Lowermost position No. 1	21.9	
Geometric center position No. 2	24.8	
Uppermost position No. 3	27.1	
Telescoping Steering Wheel Travel		60
Test Position	24.8	30

**DATA SHEET NO. 3**  
**DUMMY LONGITUDINAL CLEARANCE DIMENSIONS**

Test Vehicle: 2021 Nissan Rogue SUV  
Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20215202  
Test Date: 1/5/2021

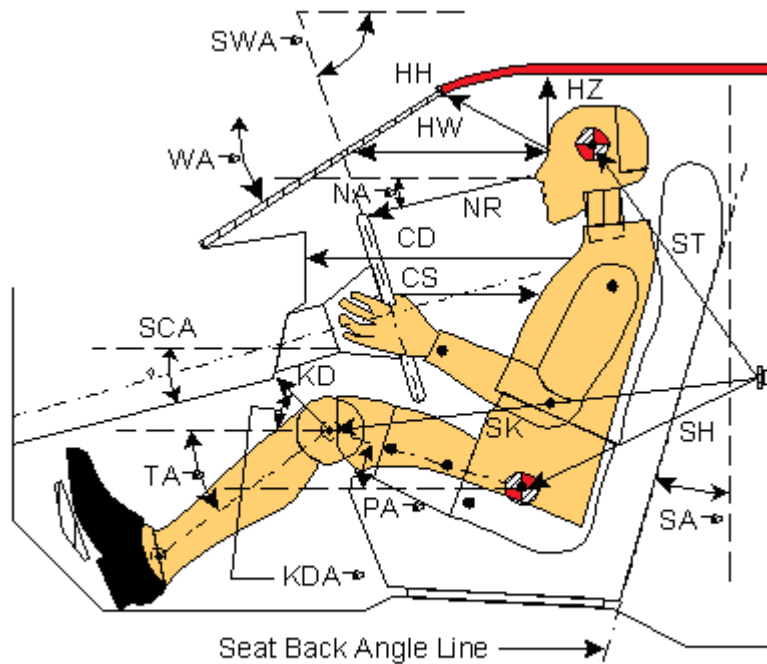


**Left Side View**

Code	Measurement Description	Driver (SN: 142)		Passenger (SN: 140)	
		Length (mm)	Angle (°)	Length (mm)	Angle (°)
WA°	Windshield Angle		27.0		
SWA°	Steering Wheel Angle		25.0		
SCA°	Steering Column Angle		65		
SA°	Seat Back Angle (on headrest post)		5.2		2.2
HZ	Head to Roof (Z)	250	90	233	90
HH	Head to Header	352	31.8	305	6.5
HW	Head to Windshield	760	0	604	0
NR	Nose to Rim / Dash	422	5.9	422	24.6
CD	Chest to Dash	544		364	
CS	Chest to Steering Hub	317	0.7		
RA	Rim to Abdomen	219	0		
KDL	Left Knee to Dash	175	29.5	70	39.6
KDR	Right Knee to Dash	177	31.2	85	9.4
PA°	Pelvic Angle		22.8		20.5
TA°	Tibia Angle		33.5		47.6
SK	Striker to Knee	614	8.1	758	6.5
ST	Striker to Head	502	71.5	520	59.5
SH	Striker to H-Point	265	38.4	462	16.3

**DATA SHEET NO. 4**  
**DUMMY LATERAL CLEARANCE DIMENSIONS**

Test Vehicle: 2021 Nissan Rogue SUV  
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20215202  
 Test Date: 1/5/2021

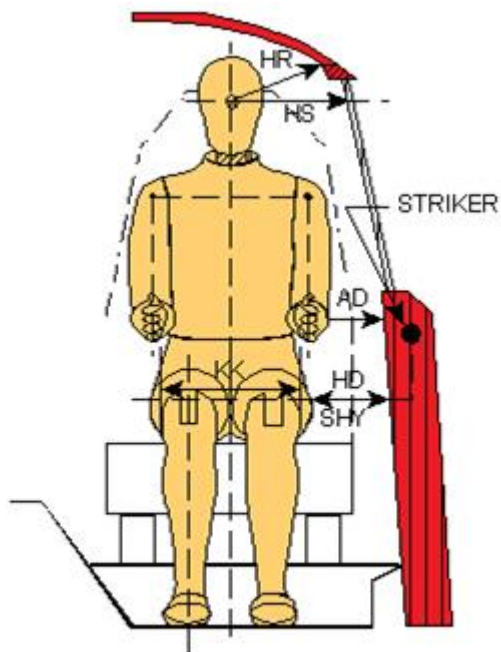


Front View

Code	Description	Driver (mm)	Passenger (mm)
AD	Arm to Door	116	77
HD	H-Point to Door	156	210
HR	Head to Side Header	254	270
HS	Head to Side Window	363	375
KK	Knee to Knee	310	167
SHY	Striker to H-Point (Y Direction)	255	275
AA	Ankle to Ankle	322	167

**DATA SHEET NO. 5  
SEAT BELT POSITIONING DATA**

Test Vehicle: 2021 Nissan Rogue SUV  
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20215202  
 Test Date: 1/5/2021

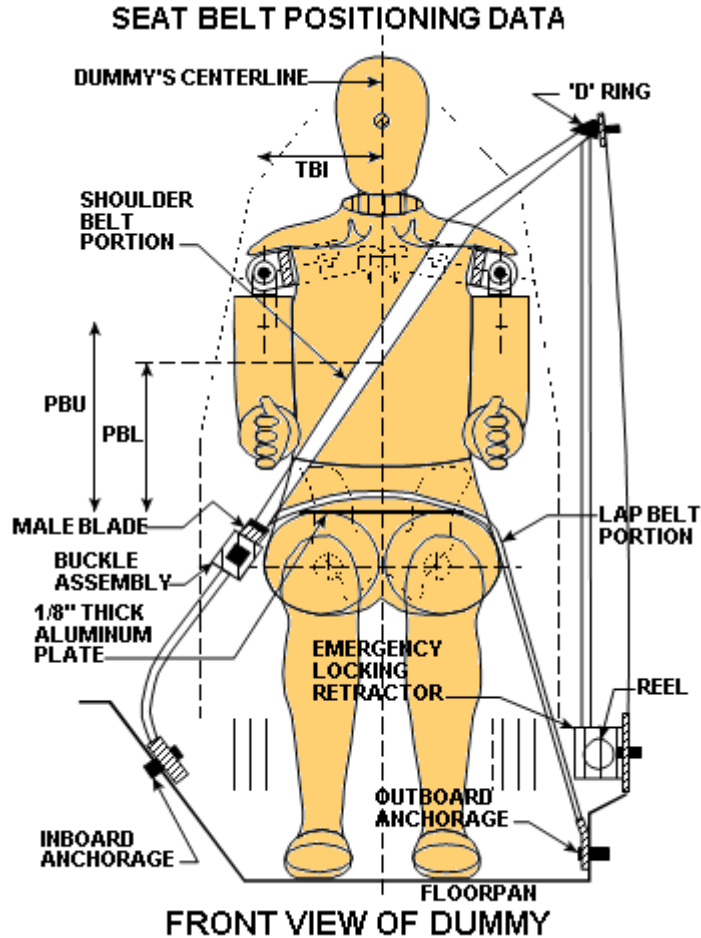

**SEAT BELT POSITIONING MEASUREMENTS**

Measurement Description	Units	Driver	Passenger
<b>PBU</b> — Top surface of reference to belt upper edge	mm	340	280
<b>PBL</b> — Top surface of reference to belt lower edge	mm	270	200

**BELT LENGTH DATA**

Measurement Description	Units	Driver	Passenger
Shoulder belt length as measured on ATD	mm	839	1005
Lap Belt Length as measured on ATD	mm	645	875
Remainder of belt on reel	mm	1116	720
Total belt length for continuous webbing systems	mm	2600	2600




**DATA SHEET NO. 6  
HIGH-SPEED CAMERA LOCATIONS AND DATA**

Test Vehicle: 2021 Nissan Rogue SUV  
Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20215202  
Test Date: 1/5/2021

**CAMERA POSITIONS FOR FRONTAL IMPACTS**

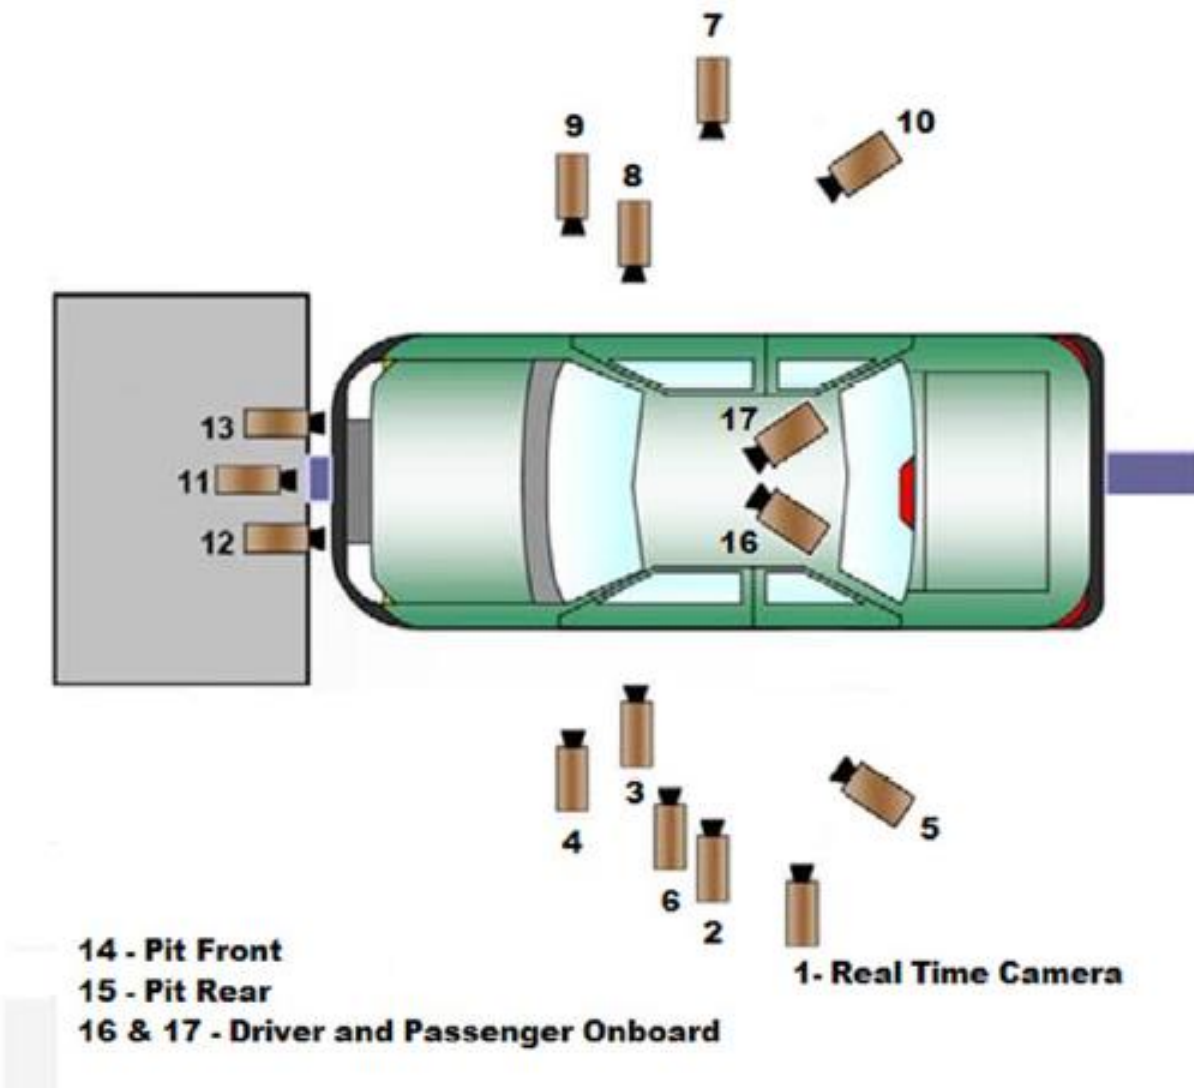

**DATA SHEET NO. 6 ... (CONTINUED)**  
**HIGH-SPEED CAMERA LOCATIONS AND DATA**

Test Vehicle: 2021 Nissan Rogue SUV  
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20215202  
 Test Date: 1/5/2021

**CAMERA LOCATIONS**


No.	Camera View	Location (mm)			Lens (mm)	Speed (fps)
		X	Y	Z		
1	Real-Time Left Overall					60
2	Left Overall	-2052	-7340	-1433	24	1000
3	Driver Close-Up	-1347	-6803	-1444	50	1000
4	Left Front Half	-910	-6254	-1371	28	1000
5	Left Angle	-4211	-4936	-2375	50	1000
6	Steering Column	-1694	-8718	-2388	75	1000
7	Right Overall	-2161	7270	-1584	24	1000
8	Passenger Close-Up	-1603	6522	-1535	50	1000
9	Right Front Half	-1179	5876	-1431	28	1000
10	Right Angle	-4161	4911	-2280	50	1000
11	Windshield	1170	0	-3471	12.5	1000
12	Driver Windshield	743	-510	-2208	25	1000
13	Passenger Windshield	743	465	-2288	25	1000
14	Pit Front	-1082	0	2381	12.5	1000
15	Pit Rear	-2089	0	2368	12.5	1000
16	Onboard Driver Airbag (Optional)				8	1000
17	Onboard Passenger Airbag (Optional)				8	1000

\* COORDINATES:      +X = forward of impact plane  
                              +Y = right of monorail center  
                              +Z = into ground

**DATA SHEET NO. 7  
VEHICLE ACCELEROMETER LOCATIONS**

Test Vehicle: 2021 Nissan Rogue SUV  
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20215202  
 Test Date: 1/5/2021

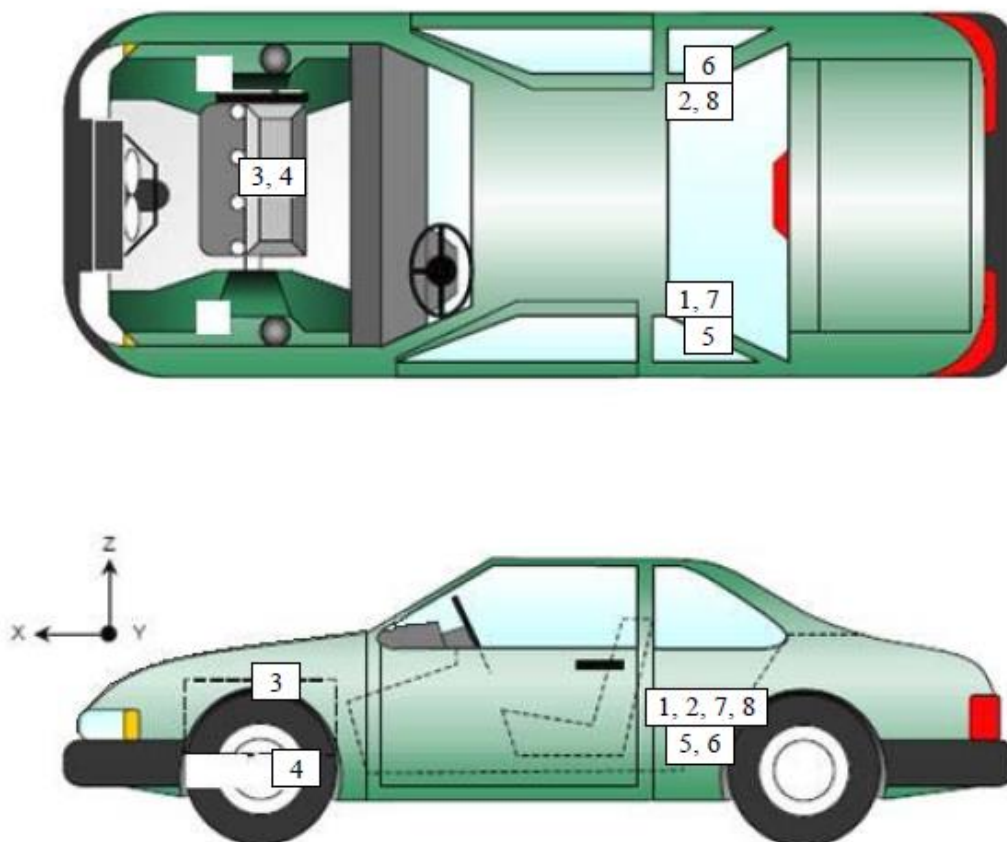

**VEHICLE ACCELEROMETER PRE-TEST LOCATIONS**

No.	Accelerometer Location	Measurements (mm)		
		X	Y	Z
1	Left Rear Accelerometer – X Direction	1831	-371	85
2	Right Rear Accelerometer – X Direction	1830	377	80
3	Engine Top X	3877	143	-310
4	Engine Bottom X	4377	57	315
5	Left Rear Accelerometer – Z Direction	1830	377	80
6	Right Rear Accelerometer – Z Direction	1831	-371	86
7	Left Rear Accelerometer – X Direction Redundant	1831	-371	85
8	Right Rear Accelerometer – X Direction Redundant	1830	377	80

*Reference Points:*      X – Rear Surface of Vehicle (+ forward)  
                                   Y – Vehicle Centerline (+ to right)  
                                   Z – Ground Plane (+ down)




**DATA SHEET NO. 8**  
**PHOTOGRAPHIC REFERENCE TARGET LOCATIONS**

Test Vehicle: 2021 Nissan Rogue SUV  
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20215202  
 Test Date: 1/5/2021

Item	Value
A	389
B	916
C	2509
D	611
E	1528
F	219
G	1727
H	1094
I	1469
J	850
K	851
L	1478
M	1094
N	1478
O	860
P	842
Q	1468

All units in millimeters

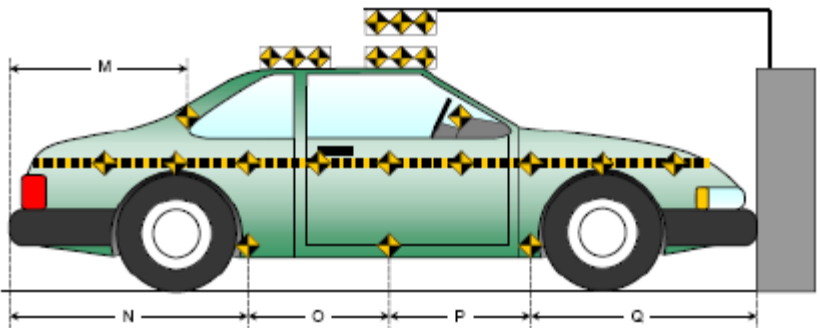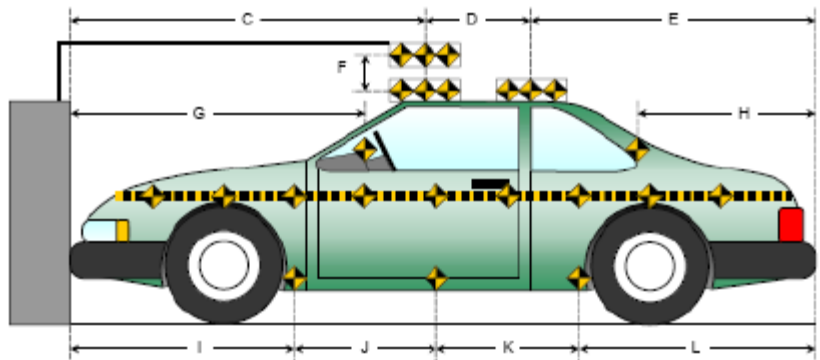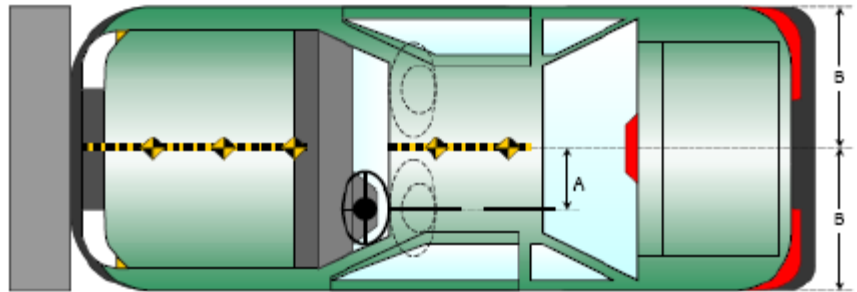

**DATA SHEET NO. 9**  
**LOAD CELL LOCATIONS ON FIXED BARRIER**

Test Vehicle: 2021 Nissan Rogue SUV  
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20215202  
 Test Date: 1/5/2021

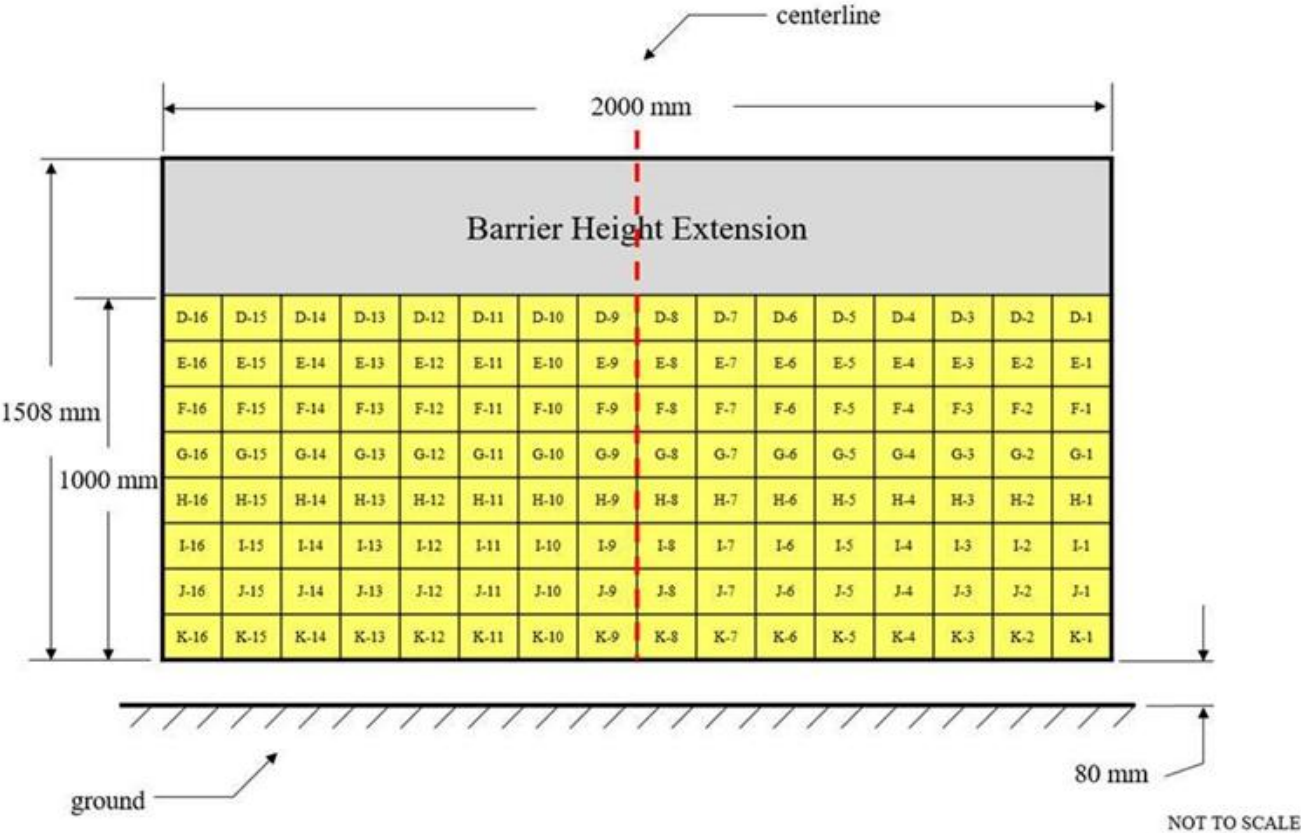


Figure 1 - Load Cell Locations on a 128-Load Cell Barrier with Plywood Height Extension\*  
 Please note above diagram is not actual representation of load cell barrier used.

**DATA SHEET NO. 10**  
**TEST VEHICLE SUMMARY OF RESULTS**

Test Vehicle: 2021 Nissan Rogue SUV  
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20215202  
 Test Date: 1/5/2021

**INSTRUMENTATION**

Instrumentation	Number of Channels Collected
Driver Dummy Accelerometers	47
Passenger Dummy Accelerometers	47
Vehicle Structure Accelerometers	8
Load Cell Barrier	384
<b>Total</b>	<b>486</b>

**CAMERA COVERAGE**

Type of Camera	Number Used in this Test
High-Speed Vehicle Onboard	2
High-Speed Offboard	14
Real-Time Panning	1
<b>Total</b>	<b>17</b>

**DATA SHEET NO. 11  
POST-TEST OBSERVATIONS**

Test Vehicle: 2021 Nissan Rogue SUV  
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20215202  
 Test Date: 1/5/2021

**TEST DUMMY INFORMATION AND CONTACT LOCATIONS**

Description	Driver	Passenger
Dummy Type / Serial No.	P572E 50 <sup>th</sup> Male / 142	P5720 5 <sup>th</sup> Female / 140
Head Contact	Frontal Airbag and Headrest	Frontal Airbag and Headrest
Upper Torso Contact	Frontal Airbag	Frontal Airbag
Lower Torso Contact	None	None
Left Knee Contact	Knee airbag	Knee airbag
Right Knee Contact	Knee airbag	Knee airbag

**DOOR OPENING AND SEAT TRACK INFORMATION**

Description	Driver	Passenger	Other
Locked / Unlocked Doors	Locked	Locked	
Front Door Opening	Closed & Operational	Closed & Operational	
Rear Door Opening	Closed & Operational	Closed & Operational	
Trunk/Hatch/Tailgate Opening			Closed & Operational
Seat Track Shift (mm)	0	0	
Seat Back Movement from Initial Position	None	None	

\*\*NOTE: Indicate "No", "N/A", or "Yes" described

**POST-TEST STRUCTURAL OBSERVATIONS**

Critical Areas of Performance	Observations and Conclusions
Windshield Damage	Minor cracks along the lower A-Pillar
Window Damage	Front windows slid up out of their stowed position
Other	None

**VEHICLE REBOUND FROM BARRIER**

Measured Parameter	Units	Value
Left Side	mm	1534
Center	mm	1559
Right Side	mm	1597
Average	mm	1563


**SUPPLEMENTAL RESTRAINT SYSTEM INFORMATION**

Restraint Type	Driver		Passenger	
	Installed	Deployed	Installed	Deployed
Front Airbag	Yes	Yes	Yes	Yes
Side Airbag 1 - Curtain	Yes	No	Yes	No
Side Airbag 2 - Torso/Pelvis Airbag	Yes	No	Yes	No
Knee Airbag	Yes	Yes	Yes	Yes
Seat Belt Pretensioner	Yes	Yes	Yes	Yes
Seat Belt Load Limiter	Yes	Yes	Yes	Yes
Other				

**DATA SHEET NO. 12  
VEHICLE PROFILE MEASUREMENTS**

Test Vehicle: 2021 Nissan Rogue SUV  
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20215202  
 Test Date: 1/5/2021

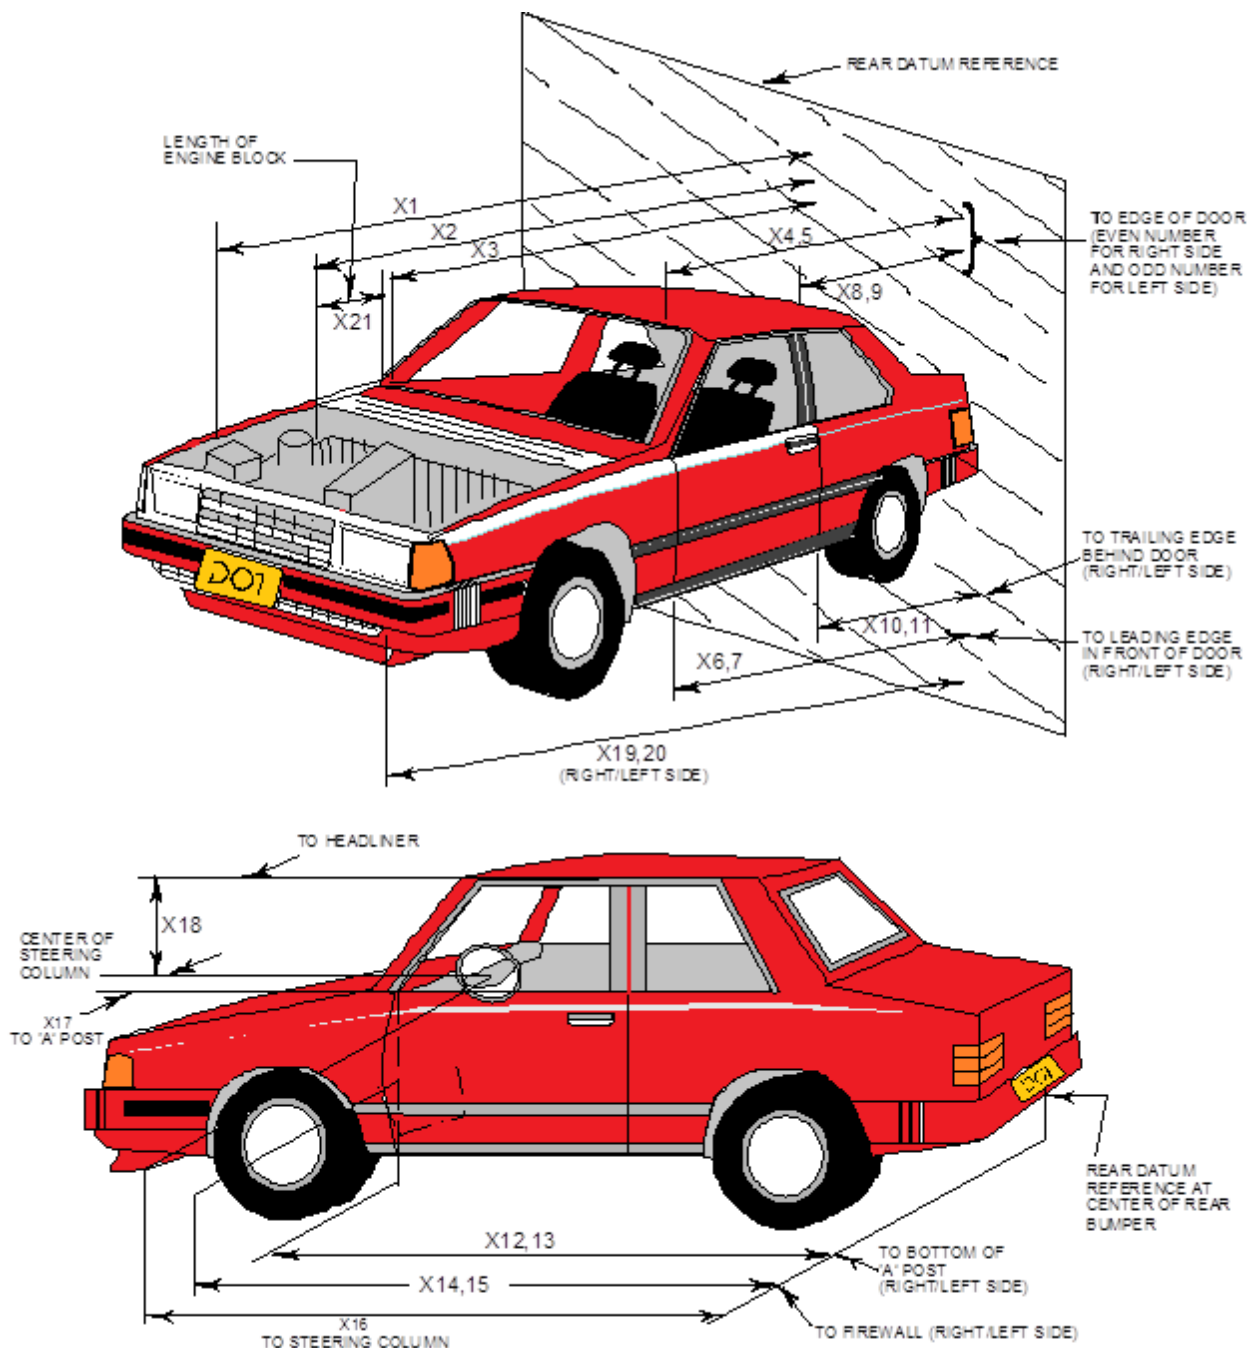



**DATA SHEET NO. 12 ... (CONTINUED)  
VEHICLE PROFILE MEASUREMENTS**

Test Vehicle: 2021 Nissan Rogue SUV  
Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20215202  
Test Date: 1/5/2021

No.	Measurement Description	Pre-Test	Post-Test	Difference
1	Total Length of Vehicle at Centerline	4648	4316	-332
2	Rear Surface of Vehicle (RSOV) to Front of Engine	3975	3825	-150
3	RSOV to Firewall	3606	3580	-26
4	RSOV to Upper Leading Edge of Right Door	3174	3174	0
5	RSOV to Upper Leading Edge of Left Door	3176	3175	-1
6	RSOV to Lower Leading Edge of Right Door	3195	3195	0
7	RSOV to Lower Leading Edge of Left Door	3197	3197	0
8	RSOV to Upper Trailing Edge of Right Door	2101	2102	1
9	RSOV to Upper Trailing Edge of Left Door	2103	2100	-3
10	RSOV to Lower Trailing Edge of Right Door	2148	2149	1
11	RSOV to Lower Trailing Edge of Left Door	2148	2149	1
12	RSOV to Bottom of "A" Post of Right Side	3311	3313	2
13	RSOV to Bottom of "A" Post of Left Side	3312	3312	0
14	RSOV to Firewall, Right Side	3521	3515	-6
15	RSOV to Firewall, Left Side	3523	3518	-5
16	RSOV to Steering Column	2749	2820	71
17	Center of Steering Column to "A" Post	275	276	1
18	Center of Steering Column to Headliner	458	473	15
19	RSOV to Right Side of Front Bumper	4580	4296	-284
20	RSOV to Left Side of Front Bumper	4578	4239	-339
21	Length of Engine Block	259	259	0
RD	RSOV to Right Side of Dash Panel	3058	3062	4
CD	RSOV to Center of Dash Panel	2922	2929	7
LD	RSOV to Left Side of Dash Panel	3057	3061	4

\*UR= Unrecoverable data point  
All Dimensions in mm

**DATA SHEET NO. 13**  
**ACCIDENT INVESTIGATION DIVISION DATA**

Test Vehicle: 2021 Nissan Rogue SUV  
Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20215202  
Test Date: 1/5/2021


**VEHICLE INFORMATION**

VIN: JN8AT3ABXMW205037  
Vehicle Size Category: MPV

Wheelbase (mm): 2704  
Test Weight (kg): 1799

**ACCELEROMETER DATA**

Accelerometer Locations: Please See Data Sheet No. 7  
Cal. Procedure / Interval: Calspan Procedure / 6 month  
Integration Algorithm: Trapezoidal  
Linearity: > 99%  
Impact Velocity (km/h): 56.28  
Velocity Change (km/h): 64.81  
Time of Separation (ms): 118

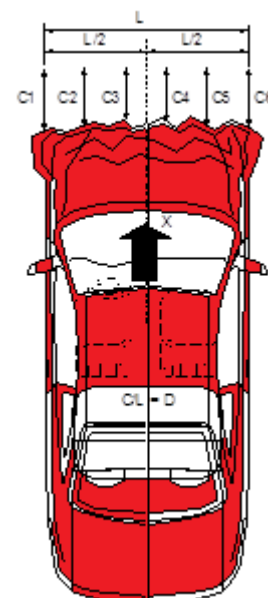

**CRUSH PROFILE**

Collision Deformation Classification: 12FDEW2  
Midpoint of Damage: C3  
Damage Region Length (mm): 1452  
Impact Mode: Frontal

No.	Measurement Description	Units	Pre-Test	Post-Test	Difference
C1	Crush Zone 1 at Left Side	mm	4428	4174	254
C2	Crush Zone 2 at Left Side	mm	4589	4244	345
C3	Crush Zone 3 at Left Side	mm	4635	4285	350
C4	Crush Zone 4 at Right Side	mm	4634	4309	325
C5	Crush Zone 5 at Right Side	mm	4583	4293	290
C6	Crush Zone 6 at Right Side	mm	4416	4200	216
L	C1 to C6	mm	1452	1525	-73

**DATA SHEET NO. 14**  
**VEHICLE INTRUSION MEASUREMENTS**

Test Vehicle: 2021 Nissan Rogue SUV  
Test Program: NCAP Frontal Barrier Impact Test


NHTSA No.: M20215202  
Test Date: 1/5/2021

**DOOR OPENING WIDTH**

Item	Description	Units	Pre-Test	Post-Test	Difference
A	Left Side Upper	mm	1005	1004	-1
B	Left Side Lower	mm	916	916	0
D	Right Side Upper	mm	1004	1003	-1
E	Right Side Lower	mm	912	912	0

**WHEELBASE MEASUREMENTS**

Item	Description	Units	Pre-Test	Post-Test	Difference
C	Left Side Wheelbase	mm	2704	2672	-32
F	Right Side Wheelbase	mm	2704	2688	-16

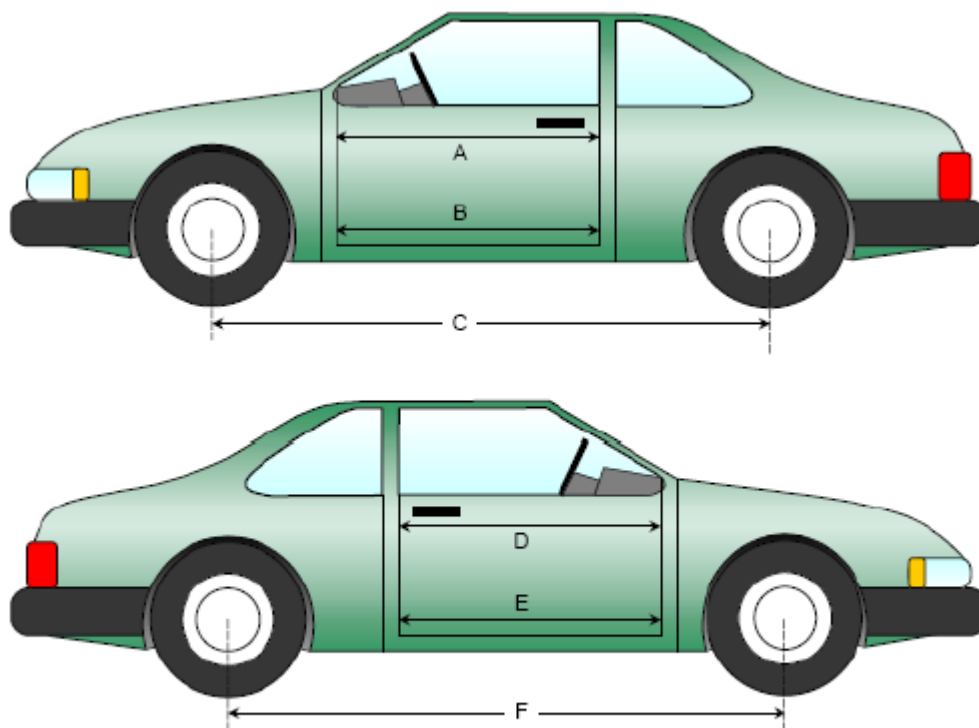

**Left & Right Side Views**

**DATA SHEET NO.14 ... (CONTINUED)  
VEHICLE INTRUSION MEASUREMENTS**


Test Vehicle: 2021 Nissan Rogue SUV  
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20215202  
 Test Date: 1/5/2021

**DRIVER COMPARTMENT INTRUSION**

Item	Description	Units	Pre-Test	Post-Test	Difference
AB	Door Opening (Inside Window Jam)	mm	831	834	3
CX	Left Knee Bolster to X	mm	305	308	3
DX	Right Knee Bolster to X	mm	288	283	-5
EX	Brake Pedal to X	mm	544	538	-6
FX	Foot Rest to X	mm	637	632	-5
GX	Center of Steering Column Wheel Hub to X	mm	54	126	72

*X = Front of Seat Track (Stationary)*

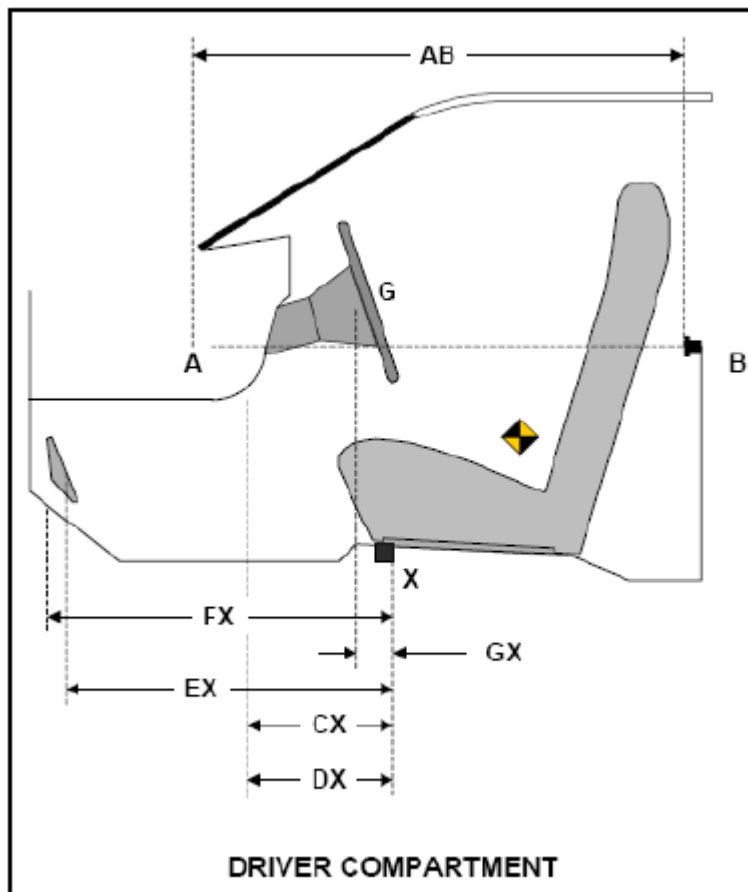

**DATA SHEET NO. 15**  
**SUMMARY OF FMVSS 212, 219 (PARTIAL), AND 301 DATA**

Test Vehicle: 2021 Nissan Rogue SUV  
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20215202  
 Test Date: 1/5/2021


**Windshield Mounting Details:** A 0.8 mm trim surrounds the top and side of windshield while a plastic shroud is on the bottom.

*The standard requires that the post-test retention measurement be a minimum of 75% of the pre-test total periphery measurement for vehicles not equipped with occupant passive restraints and 50% for each side of the windshield for vehicles which are equipped with occupant passive restraints.*

Temperature of windshield molding during test: 21° C

**WINDSHIELD PERIPHERY MEASUREMENTS**

Measurement	Pre-Test (mm)	Post-Test (mm)	% Retention
Left Side	2296	2296	100
Right Side	2296	2296	100
Total	4592	4592	100

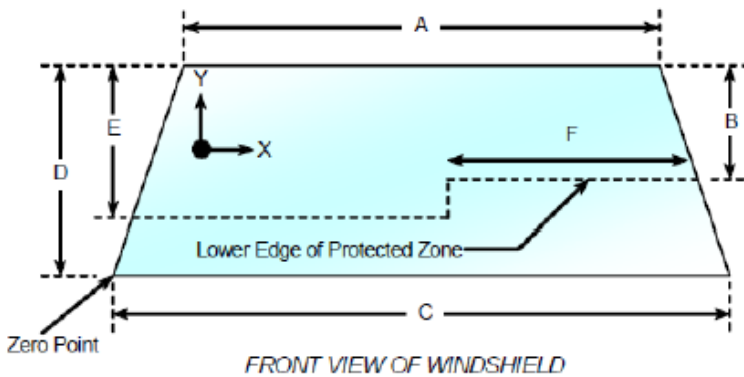

Item	Units	Value
A	mm	1240
B	mm	571
C	mm	1386
D	mm	983
E	mm	572
F	mm	530

**AREAS OF PROTECTED ZONE FAILURES**

- A. Provide coordinates of the area that the protected zone was penetrated more than .25 inches by a vehicle component other than one that is normally in contact with the windshield.
- No Penetration

X	Y

- B. Provide coordinates of the area beneath the protected zone that the inner surface of the windshield was penetrated by a vehicle component.
- No Penetration

X	Y

**DATA SHEET NO. 15 ... (CONTINUED)**  
**SUMMARY OF FMVSS 212, 219 (PARTIAL), AND 301 DATA**

Test Vehicle: 2021 Nissan Rogue SUV  
Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20215202  
Test Date: 1/5/2021

**FMVSS 301 FUEL SYSTEM INTEGRITY POST IMPACT DATA**

Temperature at Time of Impact: 21 ° C

Test Time: 10:37 AM


**STODDARD SOLVENT SPILLAGE MEASUREMENTS**

- A. From impact until vehicle motion ceases: 0 oz.  
(Maximum allowable is 1 oz.)
- B. For the 5-minute period after motion ceases: 0 oz.  
(Maximum allowable is 5 oz.)
- C. For the following 25 minutes: 0 oz.  
(Maximum allowable is 1 oz./minute)
- D. Spillage: No Spillage Occurred

**DATA SHEET NO. 16**  
**FMVSS 301 STATIC ROLLOVER RESULTS**

Test Vehicle: 2021 Nissan Rogue SUV  
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20215202  
 Test Date: 1/5/2021

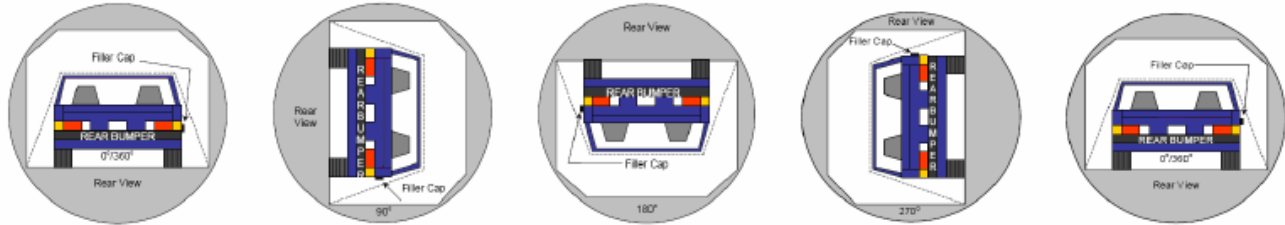

0° TO 90°                      90° TO 180°                      180° TO 270°                      270° TO 360°

1. The specified fixture rollover rate for each 90° of rotation is 60 to 180 seconds.
2. The position hold time at each position is 300 seconds (minimum).
3. Details of Stoddard Solvent Spillage: No Spillage Occurred

**SOLVENT COLLECTION TIME TABLE IN SECONDS**

Test Phase	Rotation Time	Hold Time	Total Time
0° to 90°	69	300	369
90° to 180°	65	300	365
180° to 270°	60	300	360
270° to 360°	67	300	367

**FMVSS 301 SPILLAGE TABLE**

Test Phase	First 5 Minutes	Sixth Minute	Seventh Minute	Eighth Minute
0° to 90°	0	0	0	
90° to 180°	0	0	0	
180° to 270°	0	0	0	
270° to 360°	0	0	0	


**SOLVENT SPILLAGE LOCATION TABLE**

Test Phase	Spillage Location
0° to 90°	None
90° to 180°	None
180° to 270°	None
270° to 360°	None

**DATA SHEET NO. 17**  
**DUMMY / VEHICLE TEMPERATURE STABILIZATION CHART**

Test Vehicle: 2021 Nissan Rogue SUV  
Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20215202  
Test Date: 1/5/2021

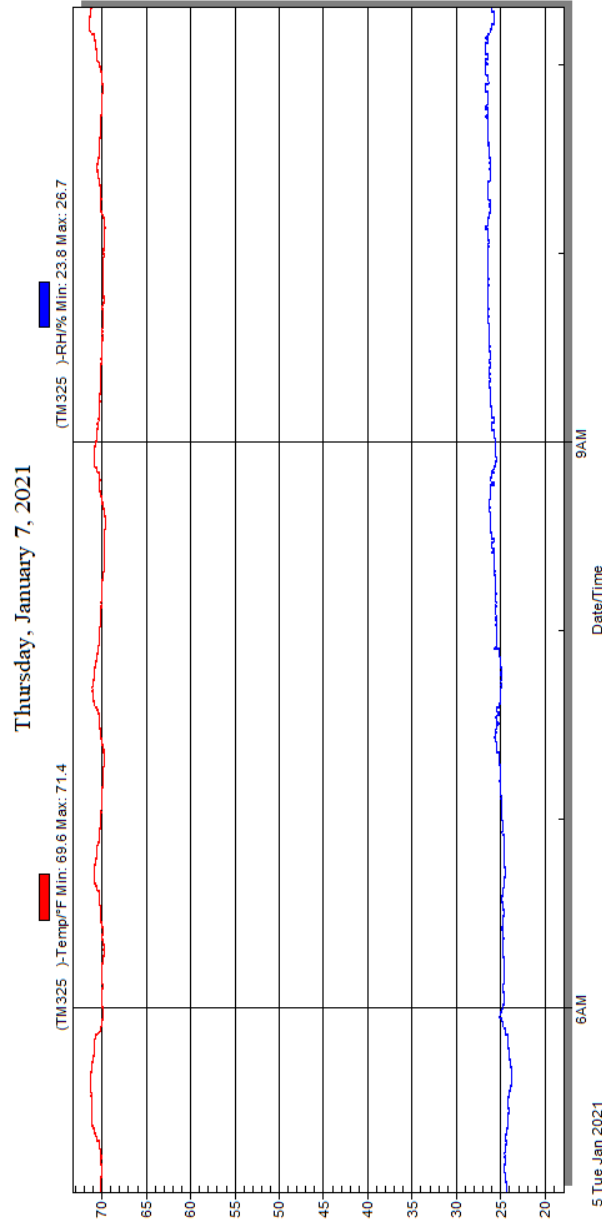

***Temperature and Humidity Stabilization Chart/Data for Dummies and Test Vehicle***



**APPENDIX A**  
**PHOTOGRAPHS**


## TABLE OF PHOTOGRAPHS

<b>Fig.</b>	<b>Description</b>	<b>Page</b>
1	Load Cell Location	A-5
2	Pre-Test Load Cell Wall	A-5
3	Post-Test Load Cell Wall	A-6
4	Manufacturer's Label	A-6
5	Tire Placard	A-7
6	2021 Nissan Rogue Frontal As Delivered	A-7
7	Left Rear 3-4 View, as Received	A-8
8	Pre-Test Front View of Test Vehicle	A-8
9	Post-Test Front View of Test Vehicle	A-9
10	Pre-Test Left View of Test Vehicle	A-9
11	Post-Test Left View of Test Vehicle	A-10
12	Pre-Test Right View of Test Vehicle	A-10
13	Post-Test Right View of Test Vehicle	A-11
14	Pre-Test Right Front 3-4 View	A-11
15	Post-Test Right Front 3-4 View	A-12
16	Pre-Test Left Rear 3-4 View	A-12
17	Post-Test Left Rear 3-4 View	A-13
18	Pre-Test Windshield View	A-13
19	Post-Test Windshield View	A-14
20	Pre-Test Engine Compartment View	A-14
21	Post-Test Engine Compartment View	A-15
22	Pre-Test Fuel Filler Cap View	A-15
23	Post-Test Fuel Filler Cap View	A-16
24	Pre-Test Front Underbody View <sup>1</sup>	A-16
25	Post-Test Front Underbody View <sup>1</sup>	A-17
26	Pre-Test Rear Underbody View <sup>1</sup>	A-17
27	Post-Test Rear Underbody View <sup>1</sup>	A-18
28	Pre-Test Dummy Cable Routing	A-18
29	Post-Test Dummy Cable Routing	A-19
30	Pre-Test Driver Dummy Front View	A-19
31	Post-Test Driver Dummy Front View	A-20
32	Pre-Test Driver Dummy Window View	A-20
33	Post-Test Driver Dummy Window View	A-21
34	Pre-Test Driver Dummy and Vehicle Interior View	A-21
35	Post-Test Driver Dummy and Vehicle Interior View	A-22

<b>Fig.</b>	<b>Description</b>	<b>Page</b>
36	Pre-Test Driver's Seat Fore-Aft Markings	A-22
37	Post-Test Driver's Seat Fore-Aft Markings	A-23
38	Pre-Test View of Belt Anchorage for Driver Dummy	A-23
39	Post-Test View of Belt Anchorage for Driver Dummy	A-24
40	Pre-Test View of Belt Buckle and Latch Plate for Driver Dummy	A-24
41	Post-Test View of Belt Buckle and Latch Plate for Driver Dummy	A-25
42	Pre-Test Driver Dummy Feet	A-25
43	Post-Test Driver Dummy Feet	A-26
44	Pre-Test Driver's Side Knee Bolster	A-26
45	Post-Test Driver's Side Knee Bolster	A-27
46	Pre-Test Driver's Side Floorpan	A-27
47	Post-Test Driver's Side Floorpan	A-28
48	Post-Test Driver Dummy Face	A-28
49	Post-Test Driver Dummy Contact With Airbag	A-29
50	Post-Test Driver Dummy Contact With Headrest	A-29
51	Pre-Test View of the Steering Wheel	A-30
52	Post-Test View of the Steering Wheel	A-30
53	Pre-Test Passenger Dummy Front View	A-31
54	Post-Test Passenger Dummy Front View	A-31
55	Pre-Test Passenger Dummy Window View	A-32
56	Post-Test Passenger Dummy Window View	A-32
57	Pre-Test Passenger Dummy and Vehicle Interior View	A-33
58	Post-Test Passenger Dummy and Vehicle Interior View	A-33
59	Pre-Test Passenger's Seat Fore-Aft Markings	A-34
60	Post-Test Passenger's Seat Fore-Aft Markings	A-34
61	Pre-Test View of Belt Anchorage for Passenger Dummy	A-35
62	Post-Test View of Belt Anchorage for Passenger Dummy	A-35
63	Pre-Test View of Belt Buckle and Latch Plate for Passenger Dummy	A-36
64	Post-Test View of Belt Buckle and Latch Plate for Passenger Dummy	A-36
65	Pre-Test Passenger Dummy Feet	A-37
66	Post-Test Passenger Dummy Feet	A-37
67	Pre-Test Passenger's Side Knee Bolster	A-38
68	Post-Test Passenger's Side Knee Bolster	A-38
69	Pre-Test Passenger's Side Floorpan	A-39
70	Post-Test Passenger's Side Floorpan	A-39
71	Post-Test Passenger Dummy Face	A-40

<b>Fig.</b>	<b>Description</b>	<b>Page</b>
72	Post-Test Passenger Dummy Contact With Airbag	A-40
73	Post-Test Passenger Dummy Contact With Headrest	A-41
74	Photograph of Ballast Installed in Vehicle	A-41
75	Post-Test Stoddard Solvent Spillage Location View, if Required	A-42
76	Post-Test Speed Trap Read-Out	A-42
77	Vehicle at 0° on Static Rollover Device	A-43
78	Vehicle at 90° on Static Rollover Device	A-43
79	Vehicle at 180° on Static Rollover Device	A-44
80	Vehicle at 270° on Static Rollover Device	A-44
81	Vehicle at 360° on Static Rollover Device	A-45
82	2021 Nissan Rogue Frontal Impact Event	A-45
83	Monroney Label Photograph	A-46

**<sup>1</sup>NOTE:** *The underbody views should include the following vehicle components: fuel pump, fuel lines, sender unit, fuel tank filler pipe and any other visible system components.*

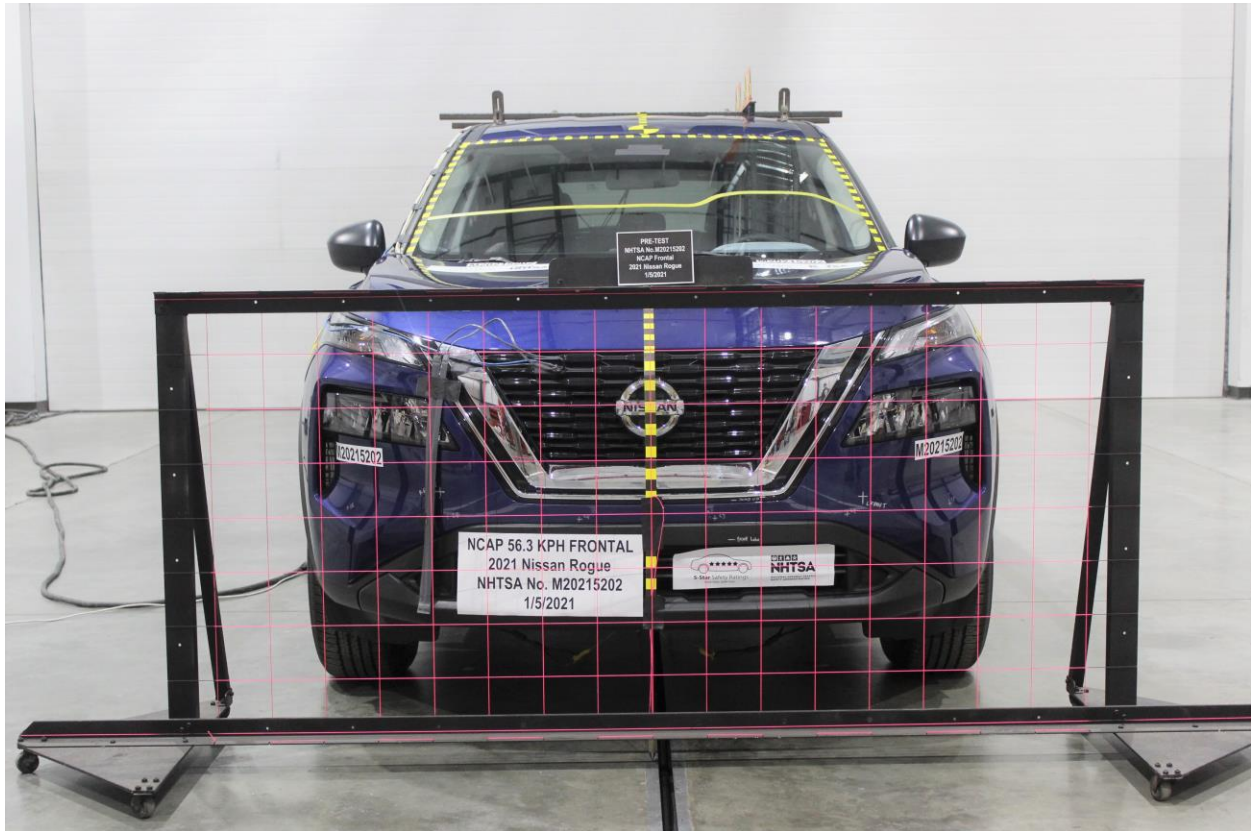

**Figure A-1: Load Cell Location**



**Figure A-2: Pre-Test Load Cell Wall**



Figure A-3: Post-Test Load Cell Wall



Figure A-4: Manufacturer's Label



Figure A-5: Tire Placard



Figure A-6: 2021 Nissan Rogue Frontal As Delivered




M20215202

Figure A-7: Left Rear 3-4 View, As Received



Figure A-8: Pre-Test Front View of Test Vehicle



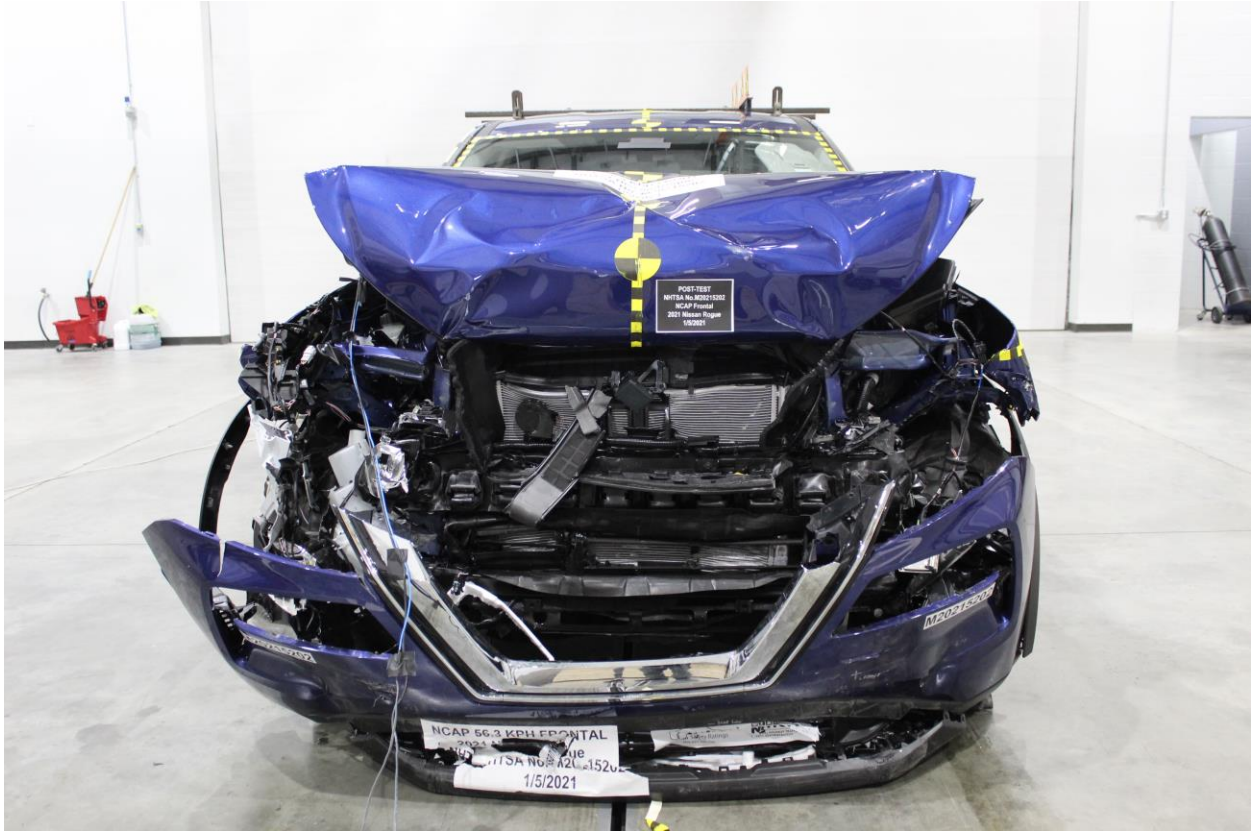

**Figure A-9: Post-Test Front View of Test Vehicle**



**Figure A-10: Pre-Test Left View of Test Vehicle**



**Figure A-11: Post-Test Left View of Test Vehicle**



**Figure A-12: Pre-Test Right View of Test Vehicle**



**Figure A-13: Post-Test Right View of Test Vehicle**



**Figure A-14: Pre-Test Right Front 3-4 View**



**Figure A-15: Post-Test Right Front 3-4 View**



**Figure A-16: Pre-Test Left Rear 3-4 View**



Figure A-17: Post-Test Left Rear 3-4 View

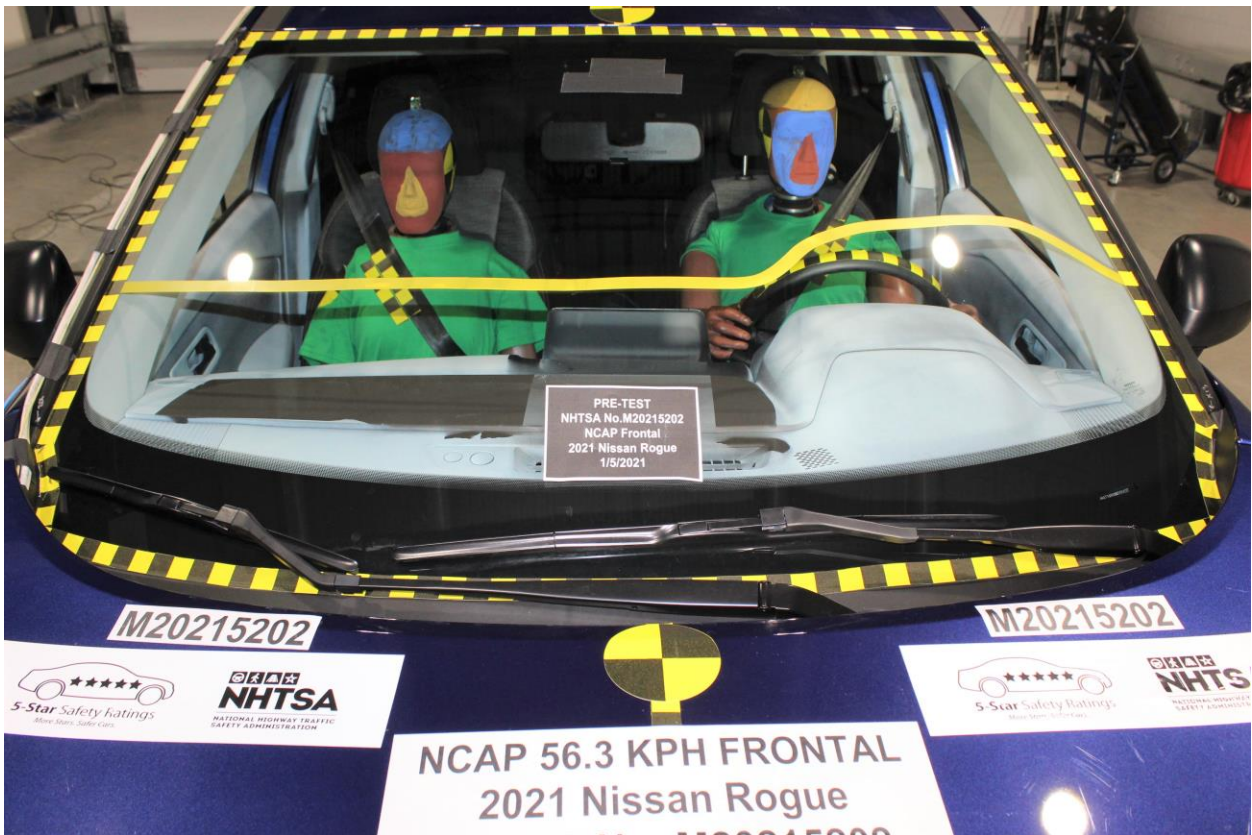



Figure A-18: Pre-Test Windshield View



Figure A-19: Post-Test Windshield View



Figure A-20: Pre-Test Engine Compartment View

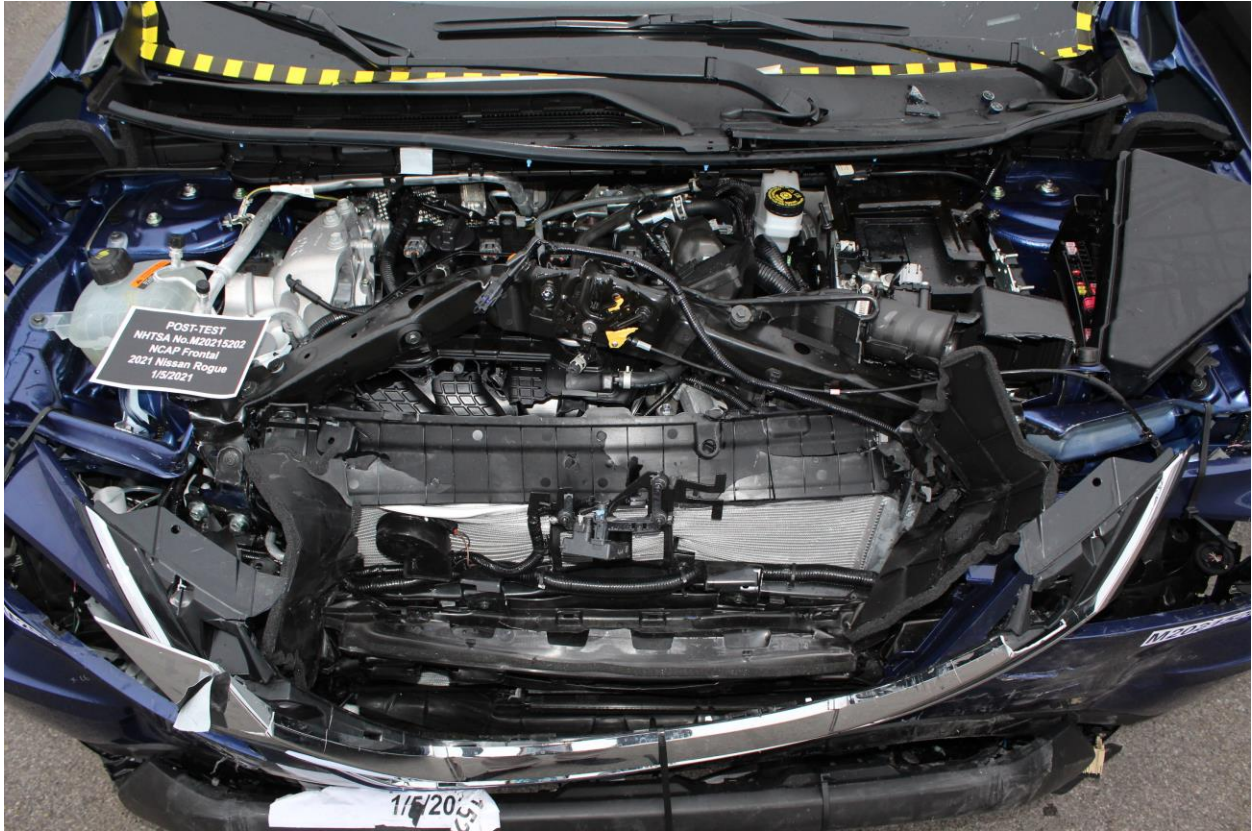

**Figure A-21: Post-Test Engine Compartment View**



**Figure A-22: Pre-Test Fuel Filler Cap View**



Figure A-23: Post-Test Fuel Filler Cap View


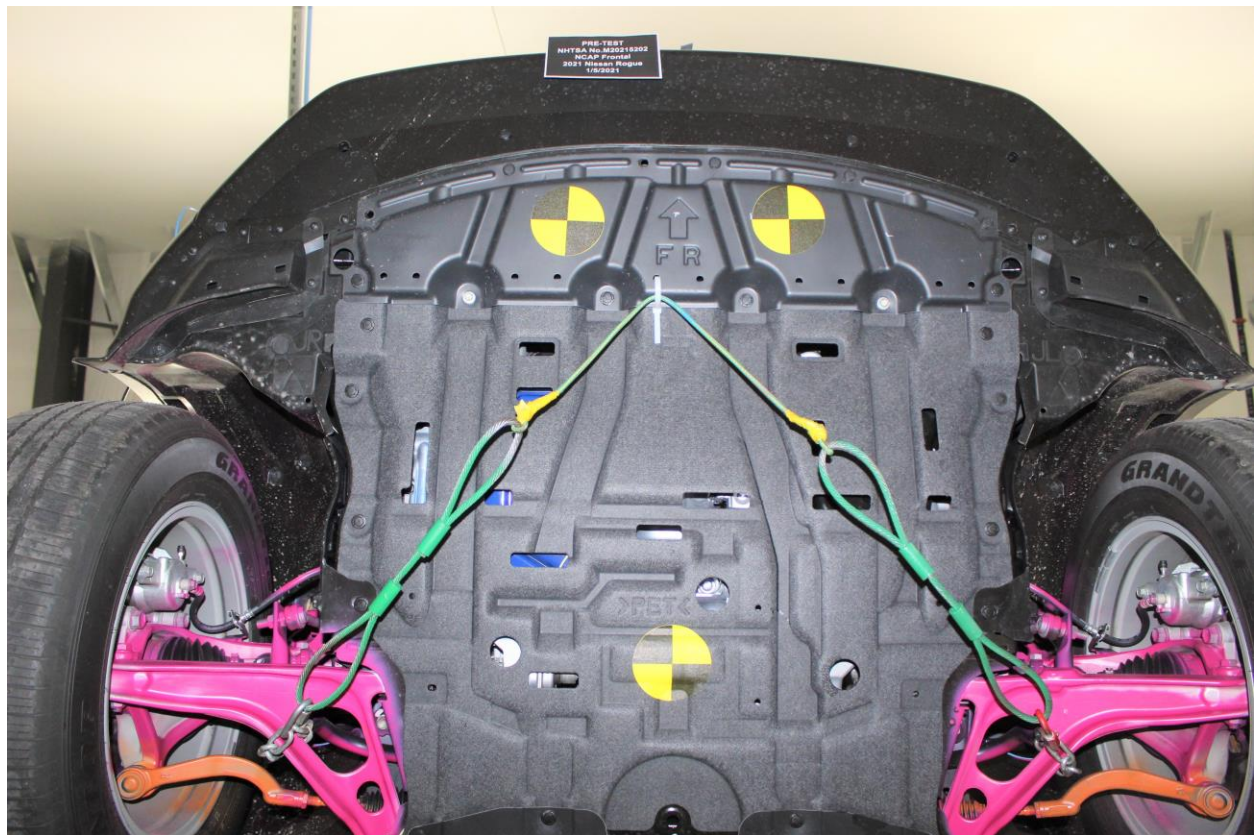


Figure A-24: Pre-Test Front Underbody View






**Figure A-25: Post-Test Front Underbody View**

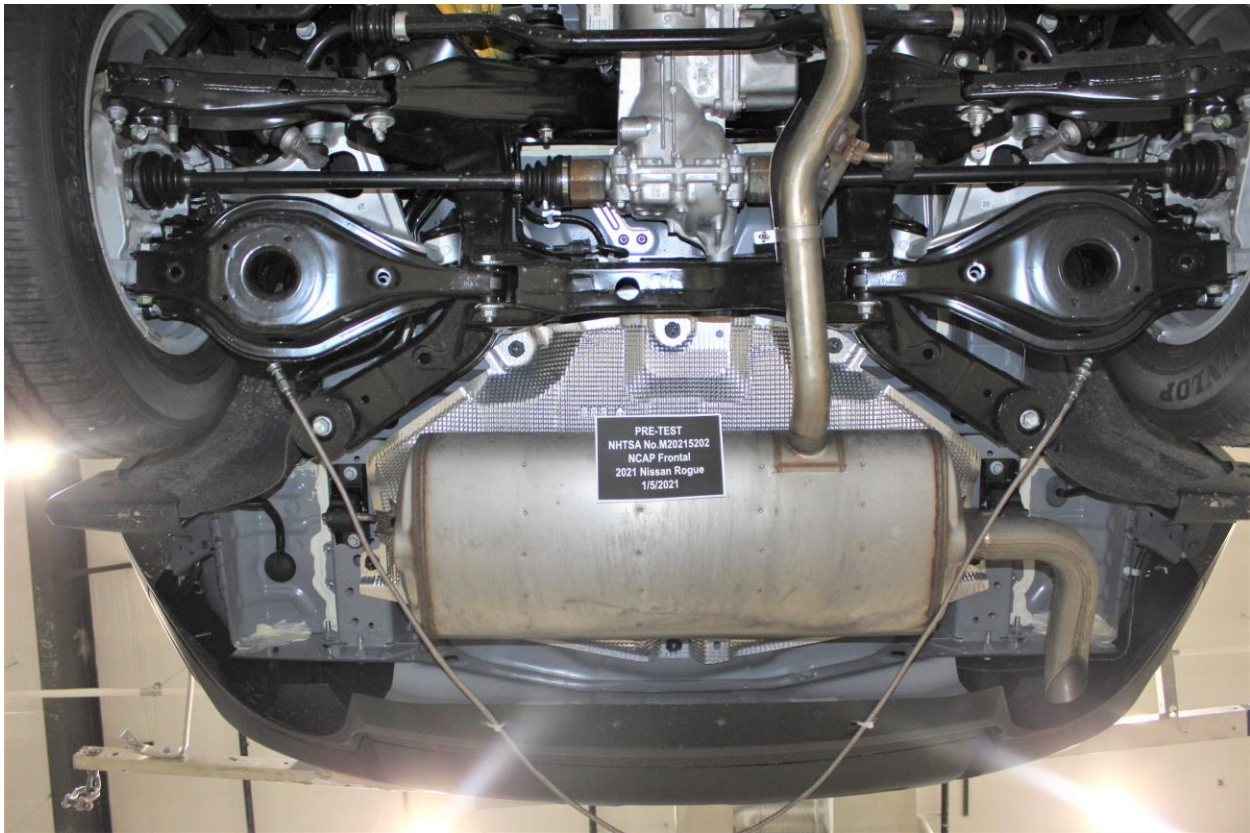

**Figure A-26: Pre-Test Rear Underbody View**

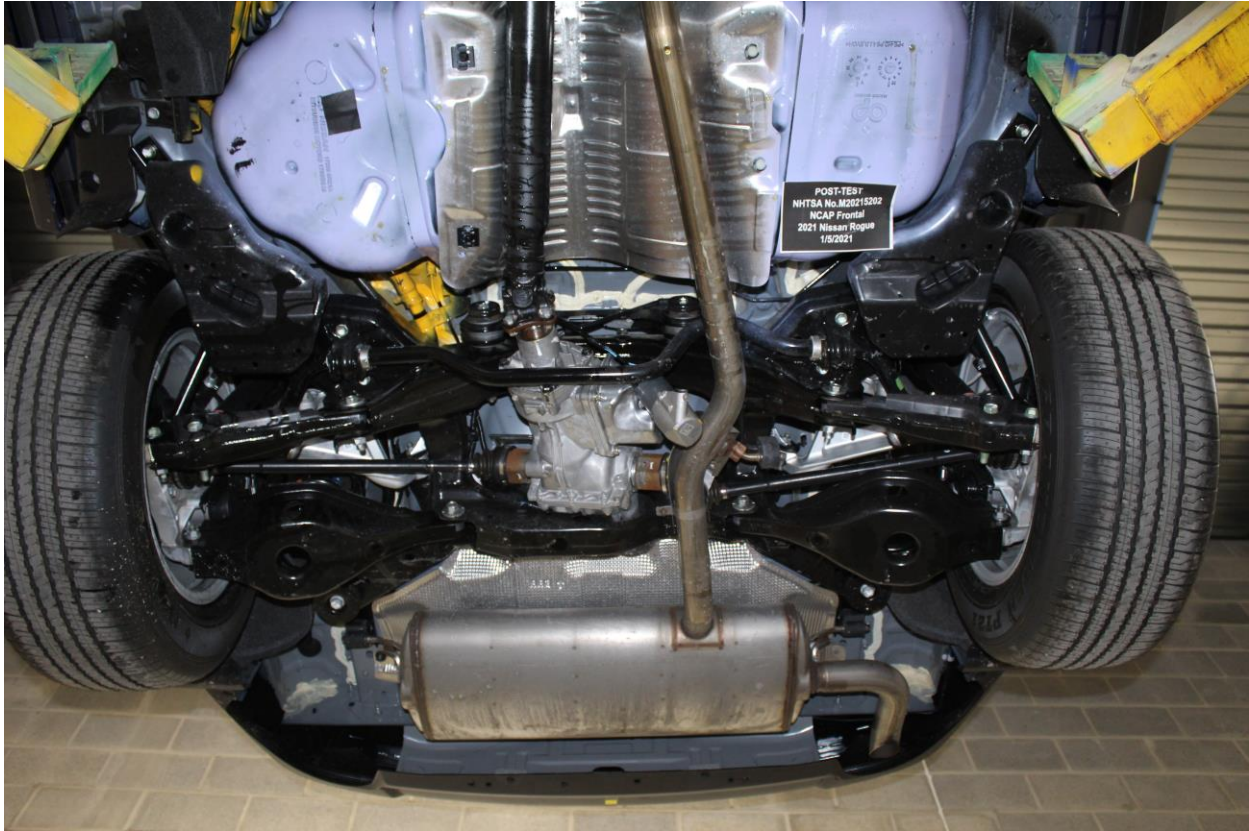

**Figure A-27: Post-Test Rear Underbody View**



**Figure A-28: Pre-Test Dummy Cable Routing**



**Figure A-29: Post-Test Dummy Cable Routing**



**Figure A-30: Pre-Test Driver Dummy Front View**



**Figure A-31: Post-Test Driver Dummy Front View**



**Figure A-32: Pre-Test Driver Dummy Window View**



Figure A-33: Post-Test Driver Dummy Window View



Figure A-34: Pre-Test Driver Dummy and Vehicle Interior View



Figure A-35: Post-Test Driver Dummy and Vehicle Interior View


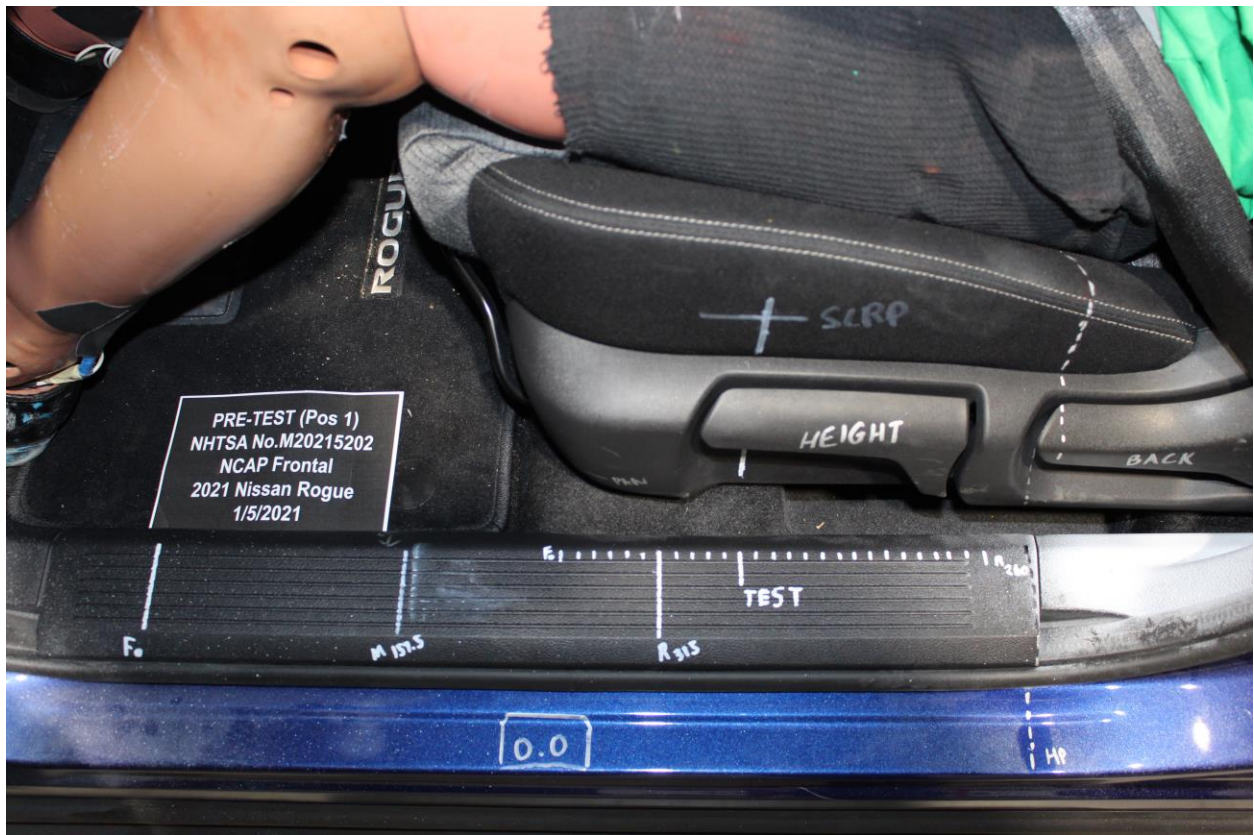


Figure A-36: Pre-Test Driver's Seat Fore-Aft Markings



POST-TEST (Pos 1)  
NHTSA No.M20215202  
NCAP Frontal  
2021 Nissan Rogue  
1/5/2021

Figure A-37: Post-Test Driver's Seat Fore-Aft Markings

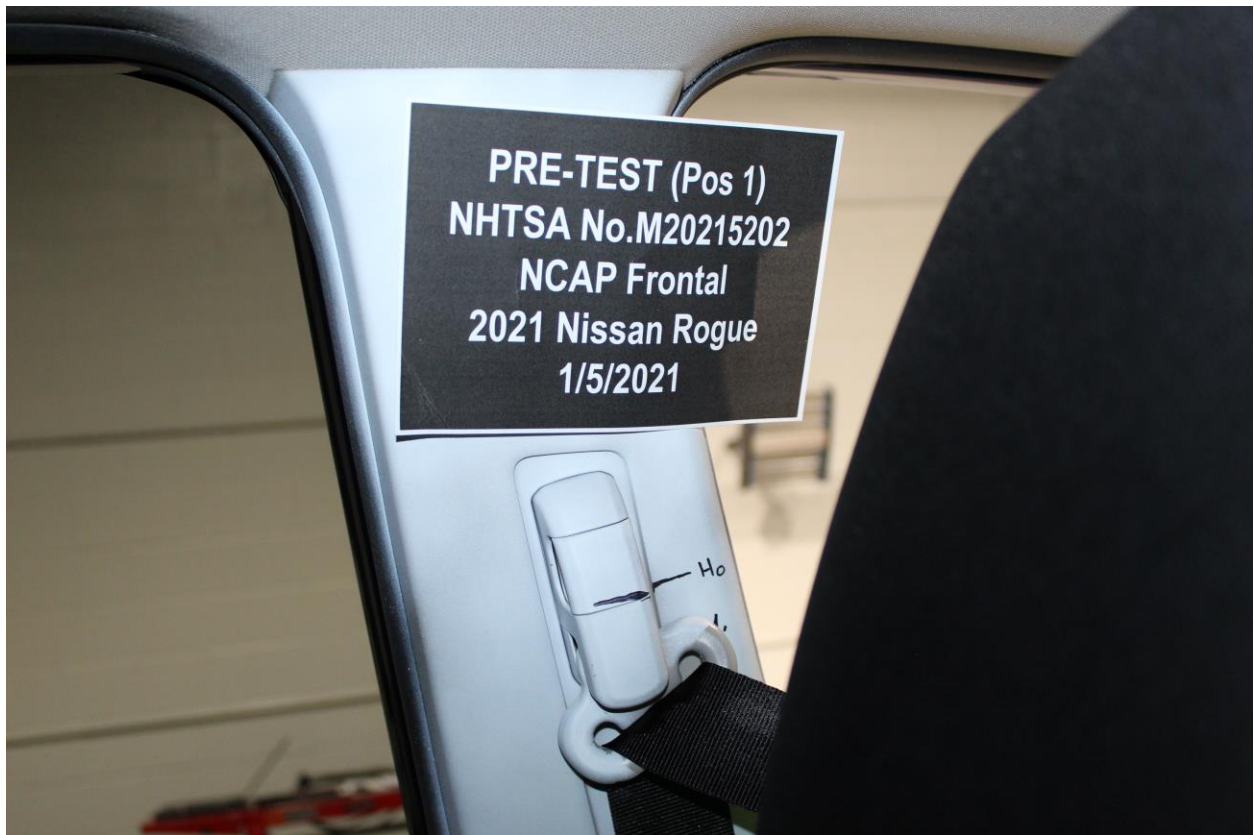

PRE-TEST (Pos 1)  
NHTSA No.M20215202  
NCAP Frontal  
2021 Nissan Rogue  
1/5/2021

Figure A-38: Pre-Test View of Belt Anchorage for Driver Dummy



**Figure A-39: Post-Test View of Belt Anchorage for Driver Dummy**



**Figure A-40: Pre-Test View of Belt Buckle and Latch Plate for Driver Dummy**





**Figure A-41: Post-Test View of Belt Buckle and Latch Plate for Driver Dummy**



**Figure A-42: Pre-Test Driver Dummy Feet**



**Figure A-43: Post-Test Driver Dummy Feet**



**Figure A-44: Pre-Test Driver's Side Knee Bolster**



**Figure A-45: Post-Test Driver's Side Knee Bolster**



**Figure A-46: Pre-Test Driver's Side Floorpan**



**Figure A-47: Post-Test Driver's Side Floorpan**



**Figure A-48: Post-Test Driver Dummy Face**



**Figure A-49: Post-Test Driver Dummy Contact With Airbag**



**Figure A-50: Post-Test Driver Dummy Contact With Headrest**




**Figure A-51: Pre-Test View of the Steering Wheel**



**Figure A-52: Post-Test View of the Steering Wheel**



**Figure A-53: Pre-Test Passenger Dummy Front View**

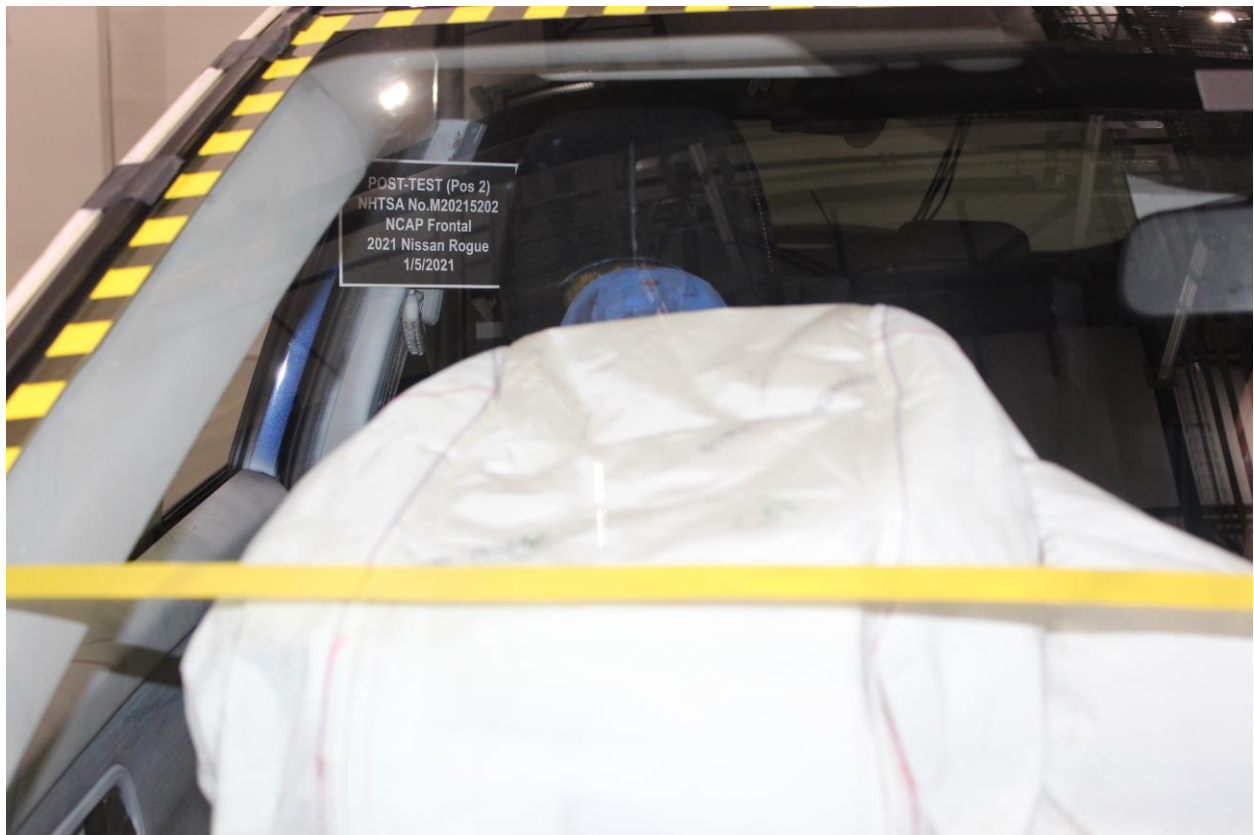

**Figure A-54: Post-Test Passenger Dummy Front View**



**Figure A-55: Pre-Test Passenger Dummy Window View**



**Figure A-56: Post-Test Passenger Dummy Window View**





**Figure A-57: Pre-Test Passenger Dummy and Vehicle Interior View**



**Figure A-58: Post-Test Passenger Dummy and Vehicle Interior View**



Figure A-59: Pre-Test Passenger's Seat Fore-Aft Markings



Figure A-60: Post-Test Passenger's Seat Fore-Aft Markings



**Figure A-61: Pre-Test View of Belt Anchorage for Passenger Dummy**



**Figure A-62: Post-Test View of Belt Anchorage for Passenger Dummy**



**Figure A-63: Pre-Test View of Belt Buckle and Latch Plate for Passenger Dummy**



**Figure A-64: Post-Test View of Belt Buckle and Latch Plate for Passenger Dummy**



**Figure A-65: Pre-Test Passenger Dummy Feet**



**Figure A-66: Post-Test Passenger Dummy Feet**



**Figure A-67: Pre-Test Passenger's Side Knee Bolster**




**Figure A-68: Post-Test Passenger's Side Knee Bolster**



**Figure A-69: Pre-Test Passenger's Side Floorpan**



**Figure A-70: Post-Test Passenger's Side Floorpan**

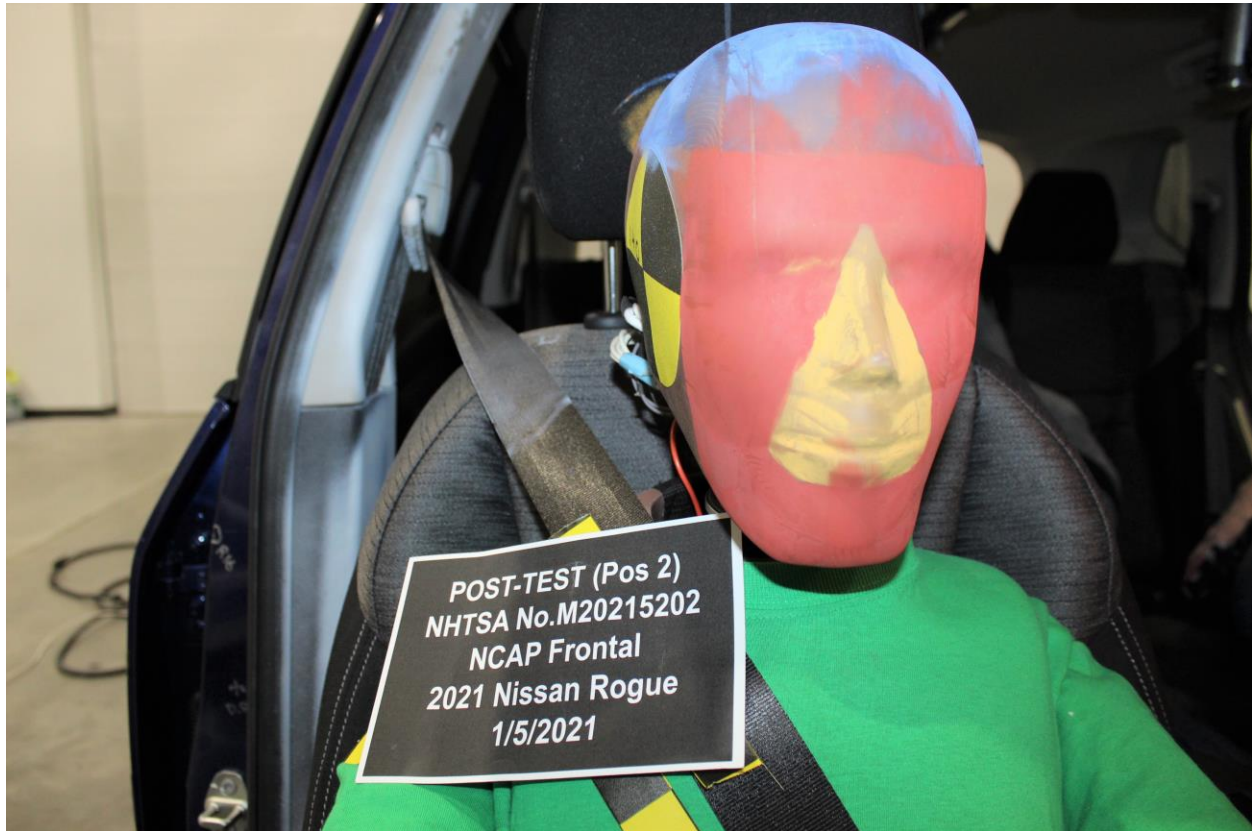

**Figure A-71: Post-Test Passenger Dummy Face**




**Figure A-72: Post-Test Passenger Dummy Contact With Airbag**





**Figure A-73: Post-Test Passenger Dummy Contact With Headrest**

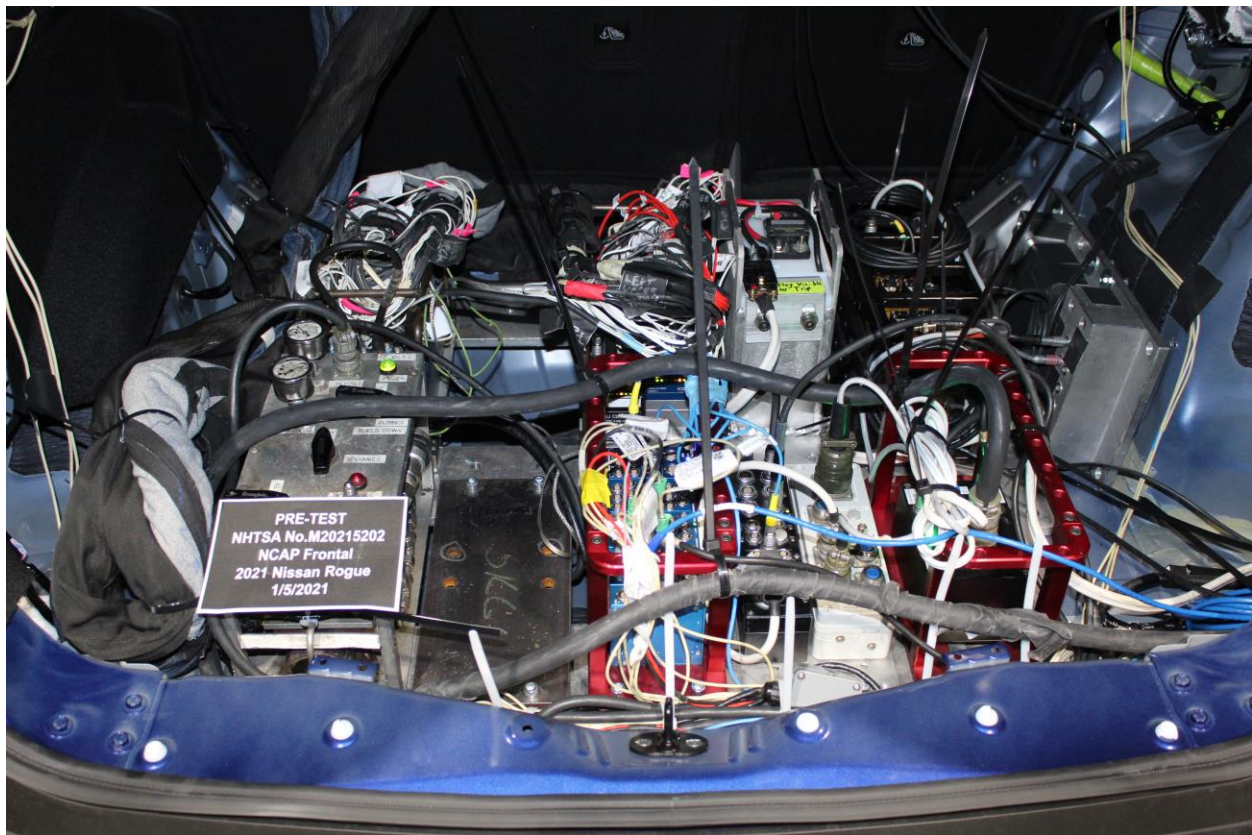

**Figure A-74: Photograph of Ballast Installed in Vehicle**

# Photo Not Applicable


Figure A-75: Post-Test Stoddard Solvent Spillage Location View, If Required




Figure A-76: Post-Test Speed Trap Read-Out




**Figure A-77: Vehicle at 0° on Static Rollover Device**

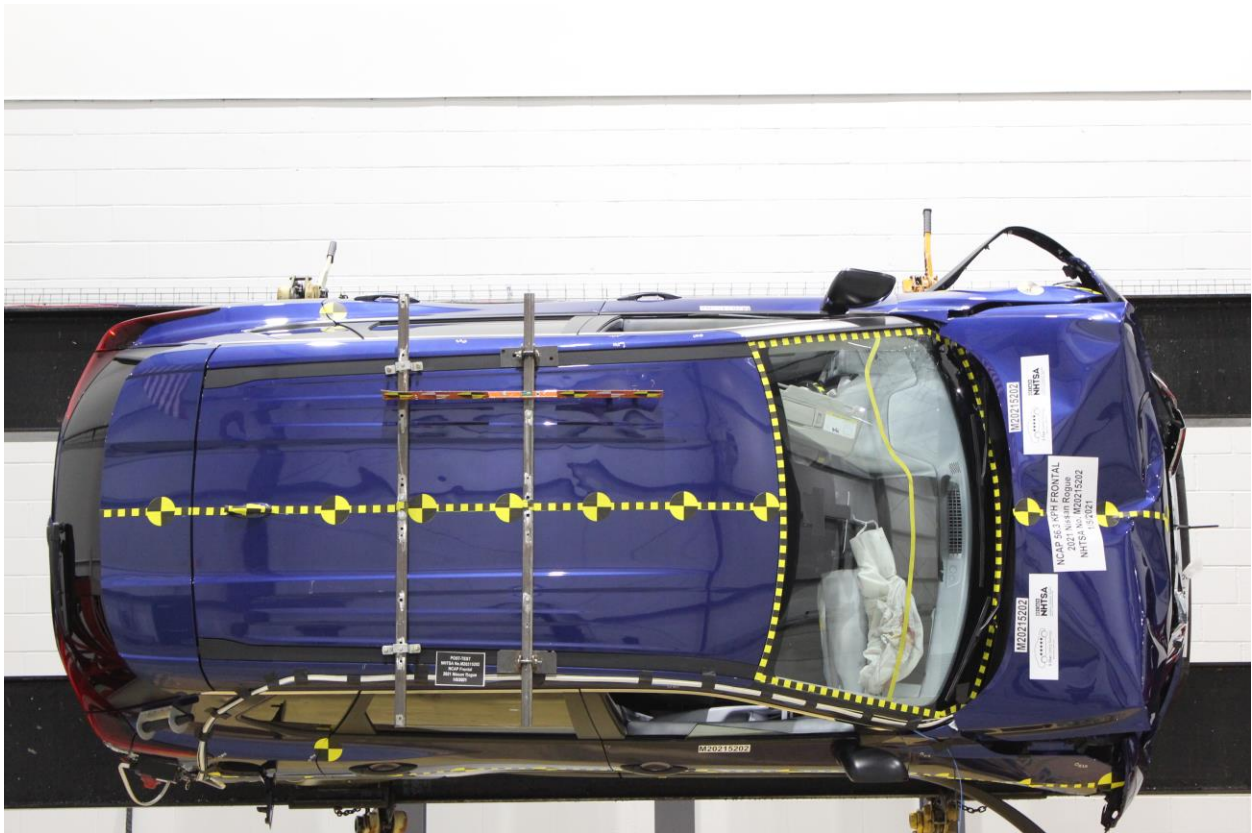

**Figure A-78: Vehicle at 90° on Static Rollover Device**

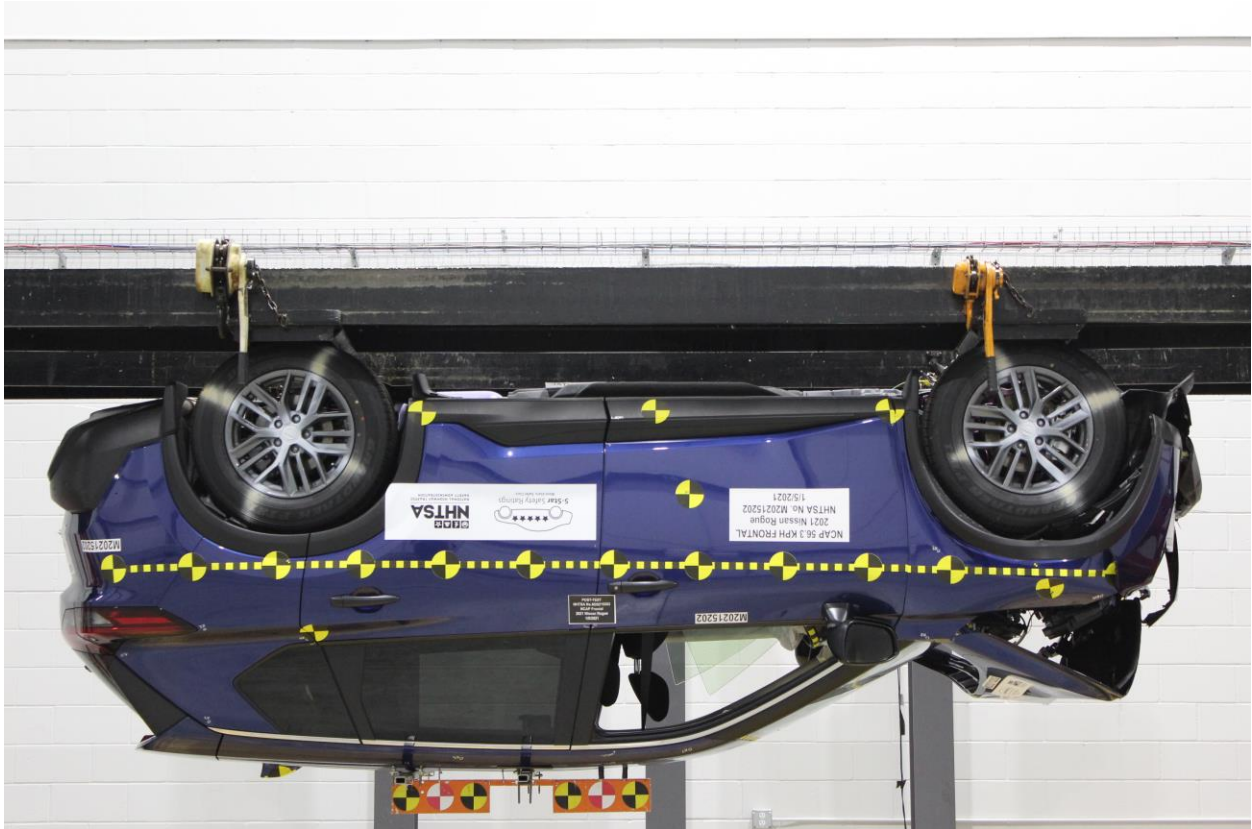

**Figure A-79: Vehicle at 180° on Static Rollover Device**

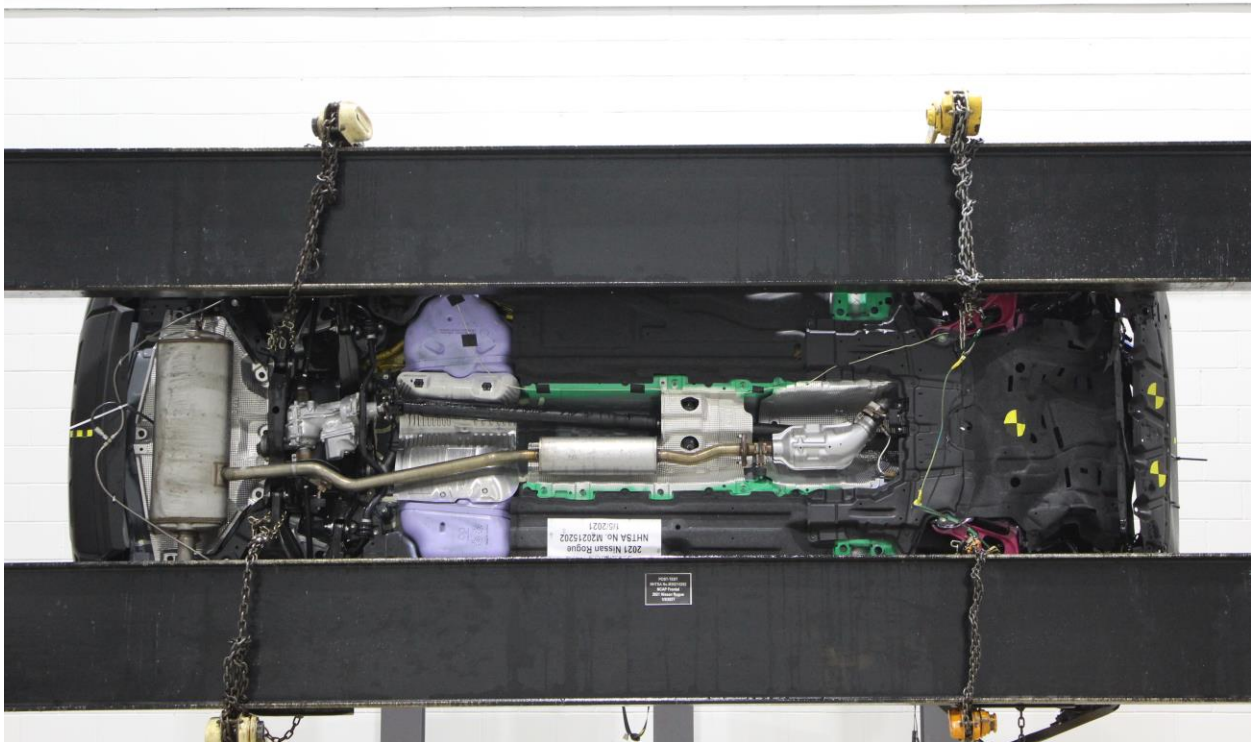

**Figure A-80: Vehicle at 270° on Static Rollover Device**



Figure A-81: Vehicle at 360° on Static Rollover Device

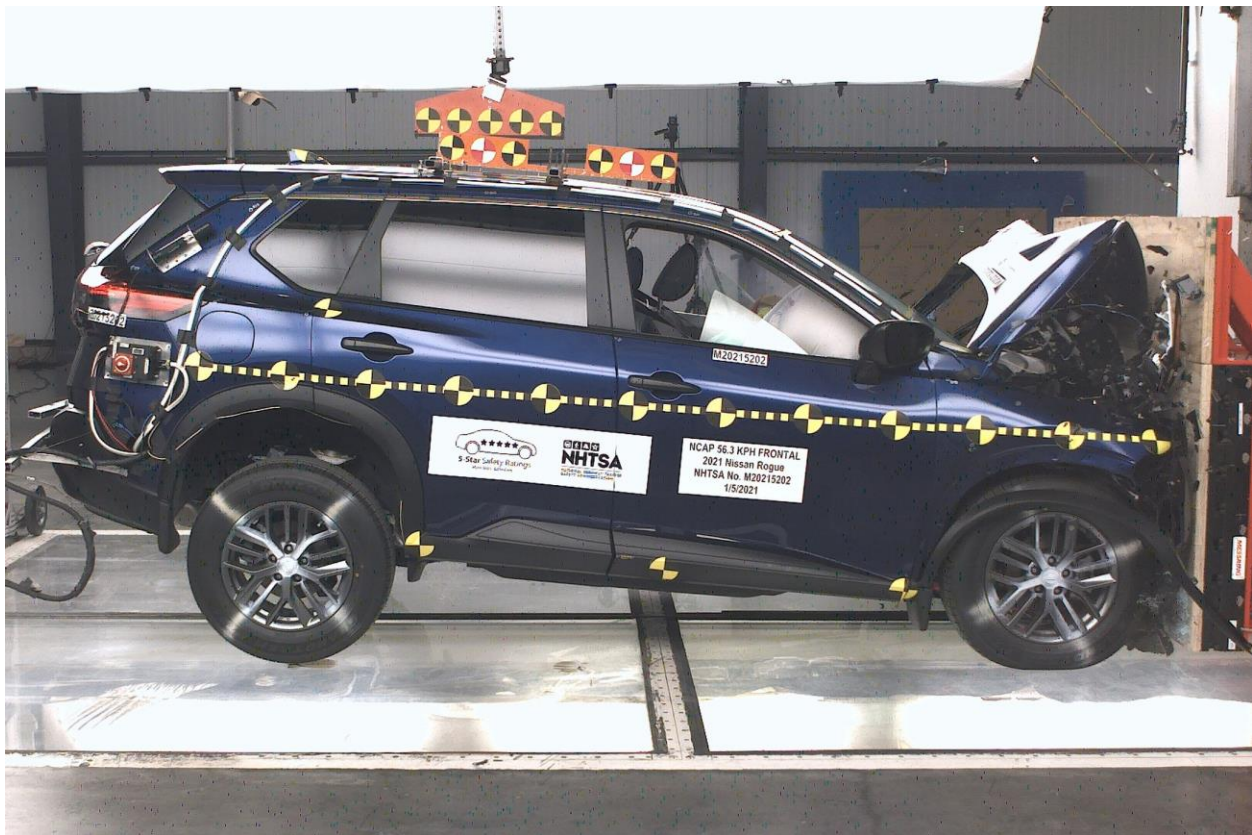




Figure A-82: 2021 Nissan Rogue Frontal Impact Event



## 2021 NISSAN ROGUE S AWD



Scan QR code for general model information & options

**EPA DOT Fuel Economy and Environment** Gasoline Vehicle

**Standard Equipment Included at No Extra Charge**

**MECHANICAL & PERFORMANCE**  
 2.5L DHC 16-Valve 4-Cylinder Engine  
 181 hp, 181 lb-ft torque  
 XTRONIC CVT®  
 Manual Mode with Paddle Shifters  
 Electronic Parking Brake with Auto-hold  
 Front and Rear Disc Brakes  
 17" Alloy Wheels  
 Temporary Spare Tire  
 Front Independent Suspension  
 Rear Multi-link Suspension  
 Intelligent All-wheel Drive System  
 Drive Mode Dial with Terrain Modes

**SAFETY & SECURITY**  
 Nissan Advanced Air Bag System (AABS)  
 Front & Rear-outboard Seat-mounted Side-impact & Roof-mounted Curtain Supplemental Air Bags  
 Driver and Front-passenger Knee Air Bags  
 Lower Anchors and Tethers for Children (LATCH)  
 Brake Assist (BA)  
 Automatic Emergency Braking (AEB) with Pedestrian Detection  
 Blind Spot Warning (BSW)  
 Rear Cross Traffic Alert (RCTA)  
 Lane Departure Warning (LDW)  
 High Beam Assist (HBA)  
 Rear Automatic Braking (RAB)  
 Intelligent Forward Collision Warning (i-FCW)

**COMFORT & CONVENIENCE**  
 8-way Manual Driver Seat  
 60/40 Split Folding & Reclining 2nd-row Seat  
 NissanConnect®  
 Apple CarPlay®  
 Android Auto™ +  
 SiriusXM® Radio  
 8" Color Touch-screen Display  
 Power Windows with Driver Auto-up/down  
 2nd-row Seat Air Vents  
 Nissan Intelligent Key® with Push Button Ignition  
 Cruise Control  
 Rear Sonar System  
 Rear Door Alert  
 Voice Recognition

**EXTERIOR**  
 Intelligent Auto Headlights  
 LED Low and High Beam Headlights  
 LED Daytime Running Lights  
 LED Tail Lamps  
 Rear Spoiler  
 Rear Privacy Glass

\*For more information, see dealer, owner's manual, or www.NissanUSA.com/connectlegal  
 \*\*Optional Equipment Replaces Standard Where Applicable

**Manufacturer's Suggested Retail Base Price:** \$27,050.00

**Options Included by Manufacturer**

Splash Guards	180.00
Floor Mats, 1-piece Cargo Area Protector, Seatback Protector and First Aid Kit	385.00

**DESTINATION CHARGES** 1,095.00

---

**Total\*\*** **\$28,710.00**

**Fuel Economy** **29 MPG**  
Small SUVs range from 16 to 120 MPG. The best vehicle rates 141 MPG.  
 combined city/hwy 26 33  
 3.4 gallons per 100 miles

**You save \$500**  
 in fuel costs over 5 years compared to the average new vehicle.

**Annual fuel COST \$1,400**

**Fuel Economy & Greenhouse Gas Rating** **6**  
This vehicle emits 310 grams CO<sub>2</sub> per mile. The best emits 0 grams per mile (tailpipe only). Producing and charging fuel also create emissions, learn more at [eafuelconomy.gov](http://eafuelconomy.gov)

**Smog Rating** **7**  
Best

Actual results will vary for many reasons, including driving conditions and how you drive and maintain your vehicle. The average new vehicle gets 27 MPG and costs \$7,500 to fuel over 5 years. Cost estimates are based on 15,000 miles per year at \$2.70 per gallon. MPGe is miles per gasoline gallon equivalent. Vehicle emissions are a significant cause of climate change and smog.

**fuelconomy.gov**  
Calculate personalized estimates and compare vehicles

**GOVERNMENT 5-STAR SAFETY RATINGS**

<b>Overall Vehicle Score</b> <small>Based on the combined ratings of frontal, side and rollover. Should ONLY be compared to other vehicles of similar size and weight.</small>	<b>Not Rated</b>	<b>DELIVERY</b>
<b>Frontal Crash</b> <small>Based on the risk of injury in a frontal impact. Should ONLY be compared to other vehicles of similar size and weight.</small>	<b>Driver Not Rated</b> <b>Passenger Not Rated</b>	<b>VEHICLE COLORS:</b> EXT-CASPIAN BLUE ME INT: CHARCOAL
<b>Side Crash</b> <small>Based on the risk of injury in a side impact.</small>	<b>Front seat Not Rated</b> <b>Rear seat Not Rated</b>	<b>FINAL ASSEMBLY POINT:</b> TACOMA
<b>Rollover</b> <small>Based on the risk of rollover in a single-vehicle crash.</small>	<b>Not Rated</b>	<b>TRANSPORT METHOD:</b> TRUCK

Star ratings range from 1 to 5 stars (\*\*\*\*\*), with 5 being the highest. Source: National Highway Traffic Safety Administration (NHTSA) [www.safercar.gov](http://www.safercar.gov) or 1-888-327-4239

This Vehicle qualifies for Nissan's  
**Security+Plus Extended Protection Plan**  
The only service agreement backed by Nissan Extended Services North America! Ask your dealer for details, or call 1-800-NISSAN-1 for more information

VIN: JN8AT3AB0XMY220637  
 EMB: 50 STATE EMISSIONS  
 MDL: 22011-25037 RBV-G  
 OPT: A-492L92C03

20201012223229AS5603

**Figure A-83: Monroney Label Photograph**

**APPENDIX B**  
**VEHICLE & DUMMY RESPONSE DATA TRACES**

**Table of Data Plots**

No.	Description	Page
Plot 1	Driver Head X Acceleration vs. Time Primary	B-5
Plot 2	Driver Head Y Acceleration vs. Time Primary	B-5
Plot 3	Driver Head Z Acceleration vs. Time Primary	B-5
Plot 4	Driver Head Resultant Acceleration vs. Time Primary	B-5
Plot 5	Driver Chest X Deflection vs. Time	B-6
Plot 6	Driver Chest X Acceleration vs. Time Primary	B-6
Plot 7	Driver Chest Y Acceleration vs. Time Primary	B-6
Plot 8	Driver Chest Z Acceleration vs. Time Primary	B-6
Plot 9	Driver Chest Resultant Acceleration vs. Time Primary	B-7
Plot 10	Driver Upper Neck Force X vs. Time Primary	B-7
Plot 11	Driver Upper Neck Force Z vs. Time Primary	B-7
Plot 12	Driver Upper Neck Moment Y vs. Time Primary	B-7
Plot 13	Driver Nij vs. Time Primary	B-8
Plot 14	Driver Left Femur Force vs. Time	B-8
Plot 15	Driver Right Femur Force vs. Time	B-8
Plot 16	Passenger Head X Acceleration vs. Time Primary	B-8
Plot 17	Passenger Head Y Acceleration vs. Time Primary	B-9
Plot 18	Passenger Head Z Acceleration vs. Time Primary	B-9
Plot 19	Passenger Head Resultant Acceleration vs. Time Primary	B-9
Plot 20	Passenger Chest X Deflection vs. Time	B-9
Plot 21	Passenger Chest X Acceleration vs. Time Primary	B-10
Plot 22	Passenger Chest Y Acceleration vs. Time Primary	B-10
Plot 23	Passenger Chest Z Acceleration vs. Time Primary	B-10
Plot 24	Passenger Chest Resultant Acceleration vs. Time Primary	B-10
Plot 25	Passenger Upper Neck Force X vs. Time Primary	B-11
Plot 26	Passenger Upper Neck Force Z vs. Time Primary	B-11
Plot 27	Passenger Upper Neck Moment Y vs. Time Primary	B-11
Plot 28	Passenger Nij vs. Time Primary	B-11
Plot 29	Passenger Left Femur Force vs. Time	B-12
Plot 30	Passenger Right Femur Force vs. Time	B-12





The following additional dummy and vehicle response data can be found in the R&D section of the NHTSA website at [www.NHTSA.gov](http://www.NHTSA.gov)





Driver Head X Acceleration Redundant  
 Driver Head Y Acceleration Redundant  
 Driver Head Z Acceleration Redundant  
 Driver Upper Neck Force Y  
 Driver Upper Neck Moment X  
 Driver Upper Neck Moment Z  
 Driver Chest X Acceleration Redundant  
 Driver Chest Y Acceleration Redundant  
 Driver Chest Z Acceleration Redundant  
 Driver Pelvis X  
 Driver Pelvis Y  
 Driver Pelvis Z  
 Driver Left Femur Redundant  
 Driver Right Femur Redundant  
 Driver Left Upper Tibia Moment X  
 Driver Left Upper Tibia Moment Y




Driver Left Upper Tibia Force Z  
Driver Left Lower Tibia Moment X  
Driver Left Lower Tibia Moment Y  
Driver Left Lower Tibia Force Z  
Driver Right Upper Tibia Moment X  
Driver Right Upper Tibia Moment Y  
Driver Right Upper Tibia Force Z  
Driver Right Lower Tibia Moment X  
Driver Right Lower Tibia Moment Y  
Driver Right Lower Tibia Force Z  
Driver Left Foot Fore Z  
Driver Left Foot Aft X  
Driver Left Foot Aft Z  
Driver Right Foot Fore Z  
Driver Right Foot Aft X  
Driver Right Foot Aft Z  
Driver Shoulder Belt Force  
Driver Lap Belt Force  
Driver Head Angular Velocity X  
Driver Head Angular Velocity Y  
Driver Head Angular Velocity Z  
Passenger Head X Acceleration Redundant  
Passenger Head Y Acceleration Redundant  
Passenger Head Z Acceleration Redundant  
Passenger Upper Neck Force X  
Passenger Upper Neck Force Z  
Passenger Upper Neck Moment Y  
Passenger Chest X Acceleration Redundant  
Passenger Chest Y Acceleration Redundant  
Passenger Chest Z Acceleration Redundant  
Passenger Pelvis X  
Passenger Pelvis Y  
Passenger Pelvis Z  
Passenger Left Femur Redundant  
Passenger Right Femur Redundant  
Passenger Left Upper Tibia Moment X  
Passenger Left Upper Tibia Moment Y  
Passenger Left Upper Tibia Force Z  
Passenger Left Lower Tibia Moment X  
Passenger Left Lower Tibia Moment Y  
Passenger Left Lower Tibia Force Z  
Passenger Right Upper Tibia Moment X  
Passenger Right Upper Tibia Moment Y  
Passenger Right Upper Tibia Force Z  
Passenger Right Lower Tibia Moment X  
Passenger Right Lower Tibia Moment Y  
Passenger Right Lower Tibia Force Z  
Passenger Left Foot Fore Z  
Passenger Left Foot Aft X  
Passenger Left Foot Aft Z

Passenger Right Foot Fore Z  
Passenger Right Foot Aft X  
Passenger Right Foot Aft Z  
Passenger Shoulder Belt Force  
Passenger Lap Belt Force  
Passenger Head Angular Velocity X  
Passenger Head Angular Velocity Y  
Passenger Head Angular Velocity Z  
Left Rear Seat Crossmember X  
Left Rear Seat Crossmember Z  
Right Rear Seat Crossmember X  
Right Rear Seat Crossmember Z  
Left Rear Seat Crossmember X Redundant  
Right Rear Seat Crossmember X Redundant  
Vehicle Engine Top X  
Vehicle Engine Bottom X  
Load Cell Barrier Forces and Moments

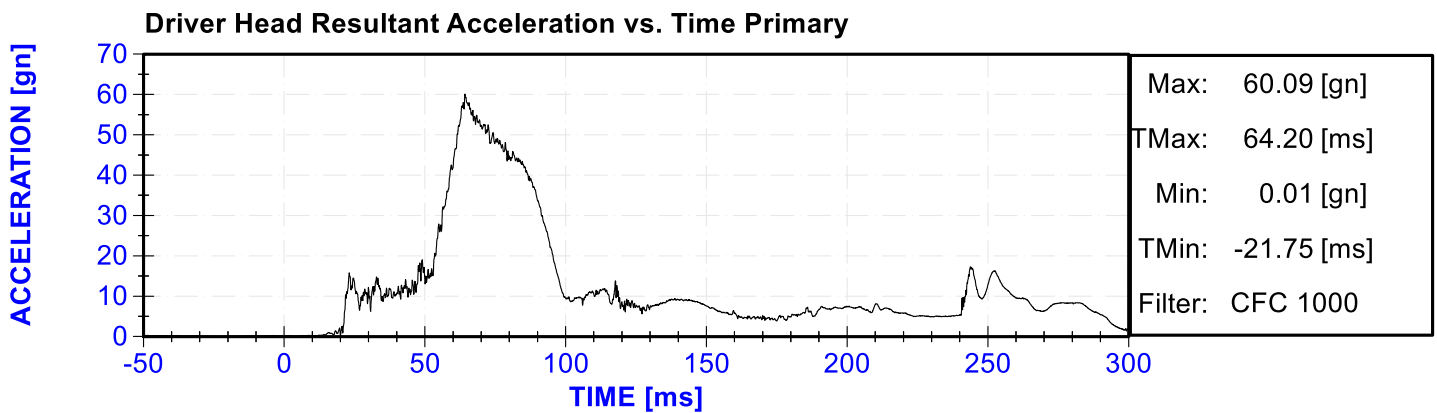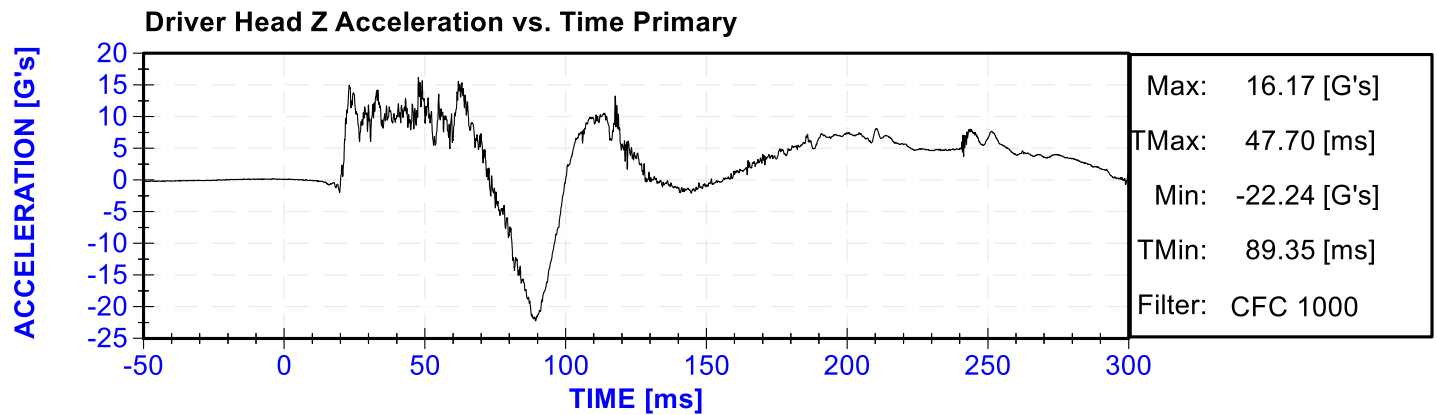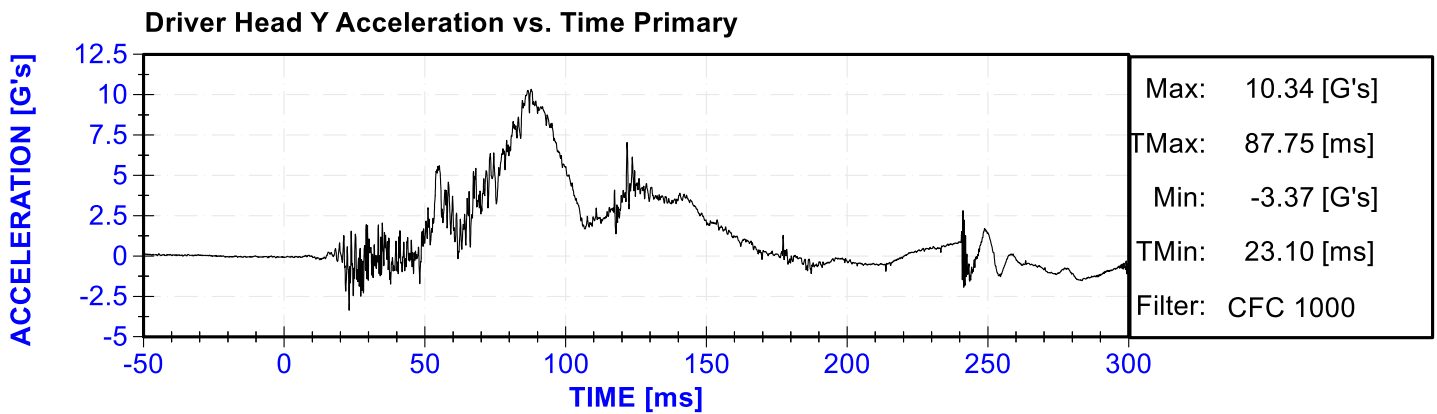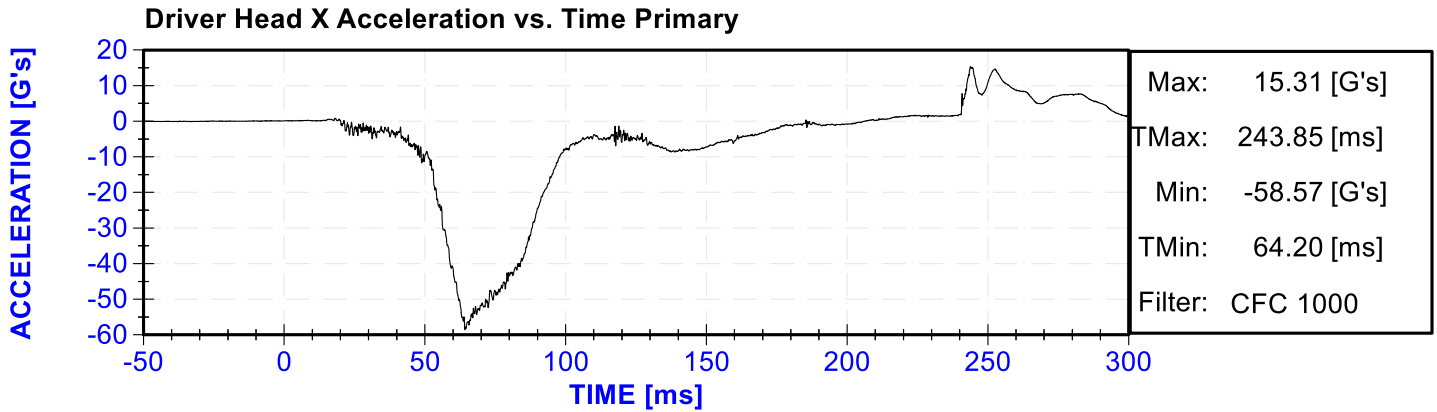


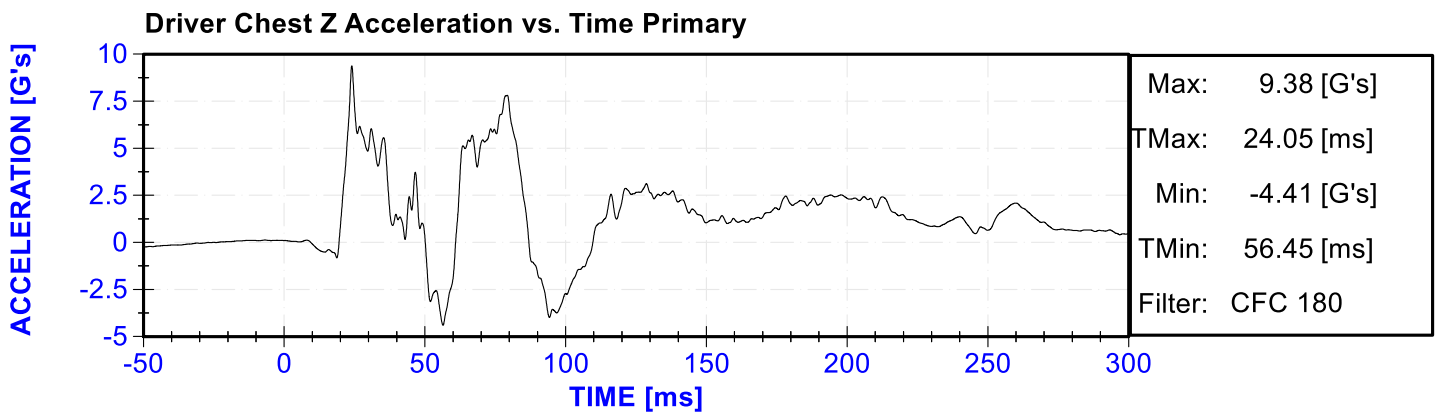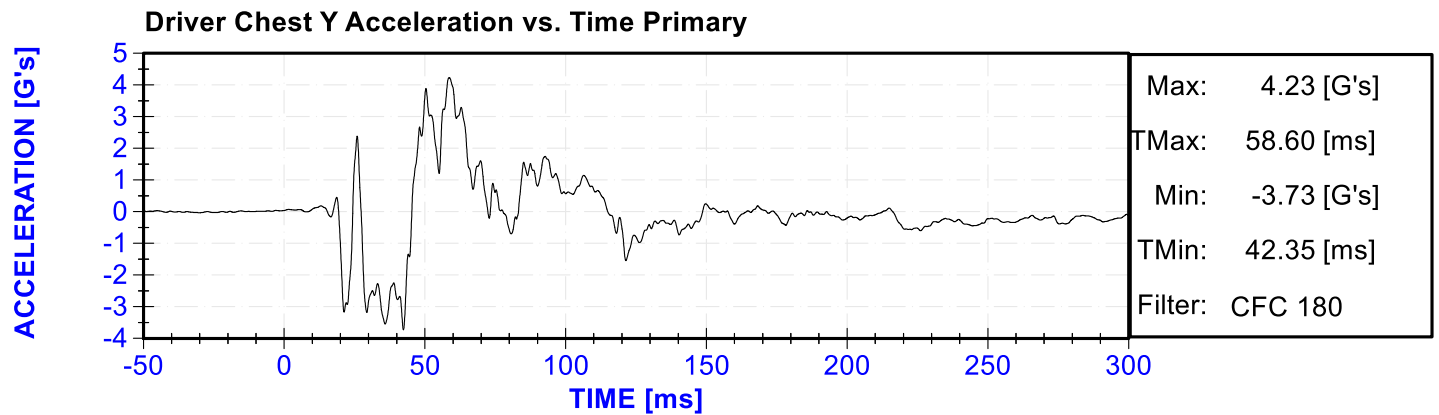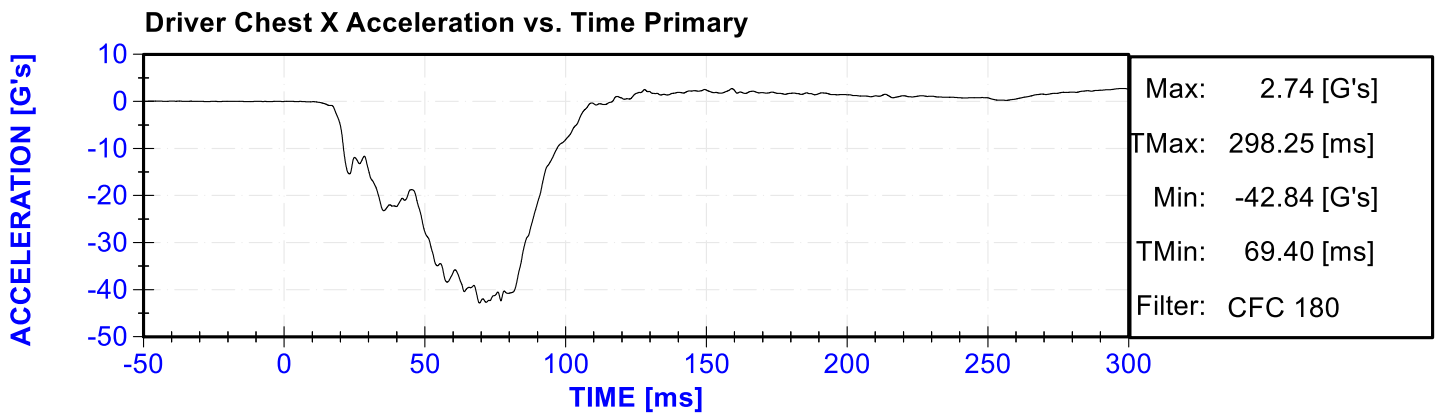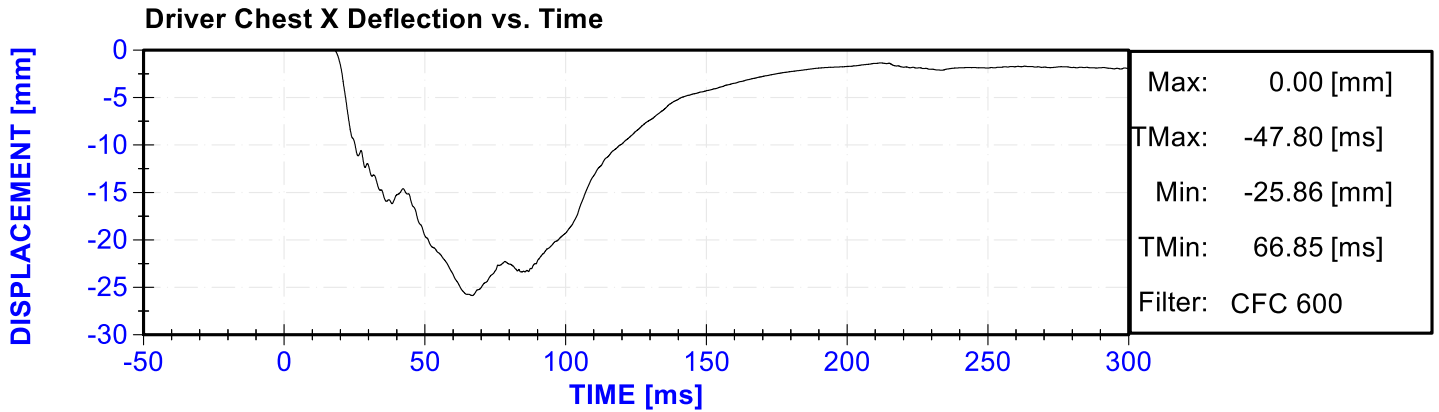


Driver Chest Resultant Acceleration vs. Time Primary

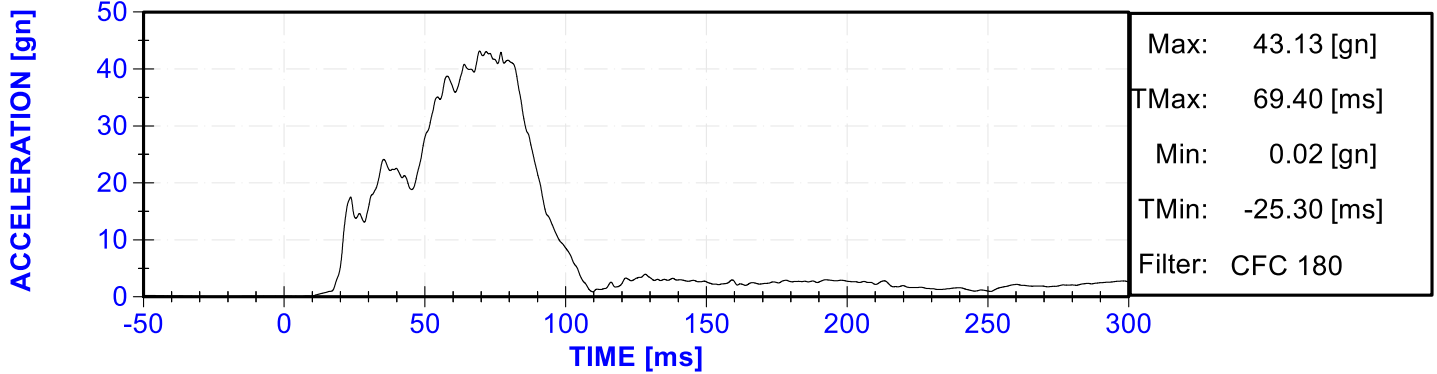


Driver Upper Neck Force X vs. Time Primary




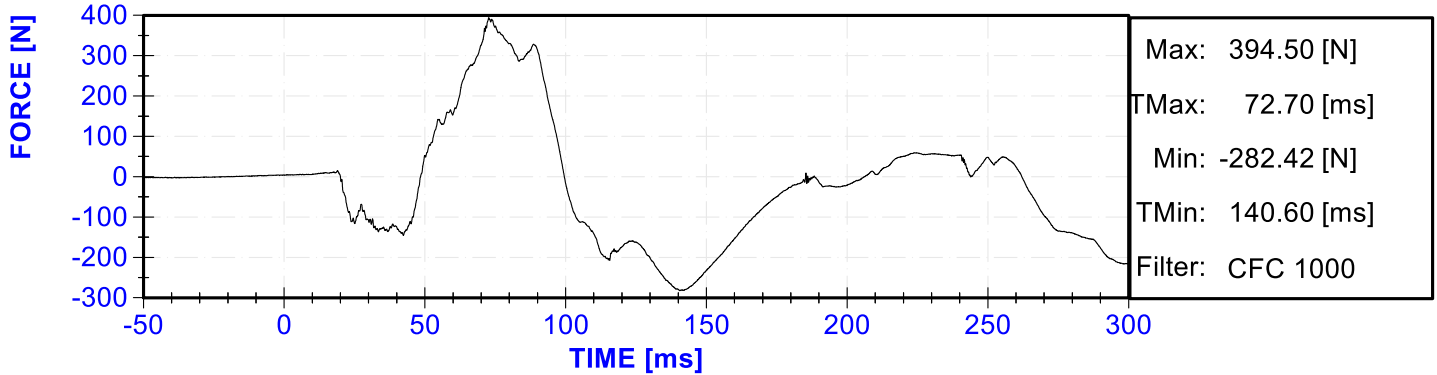






Driver Upper Neck Force Z vs. Time Primary




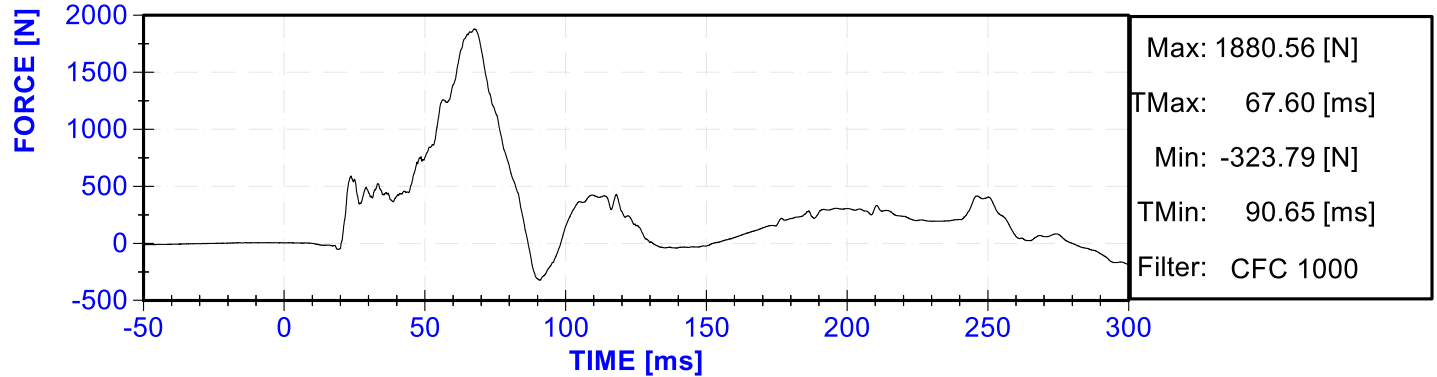


Driver Upper Neck Moment Y vs. Time Primary




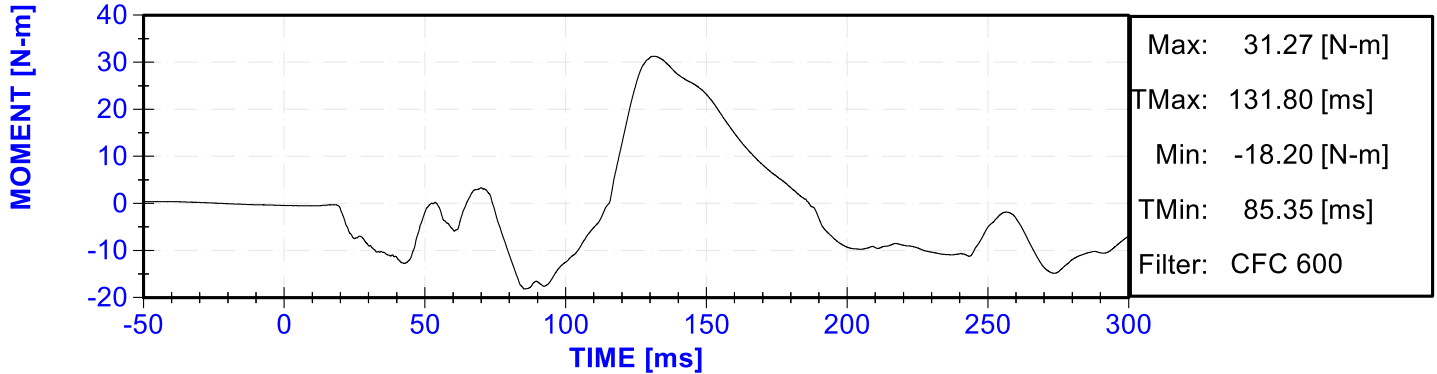


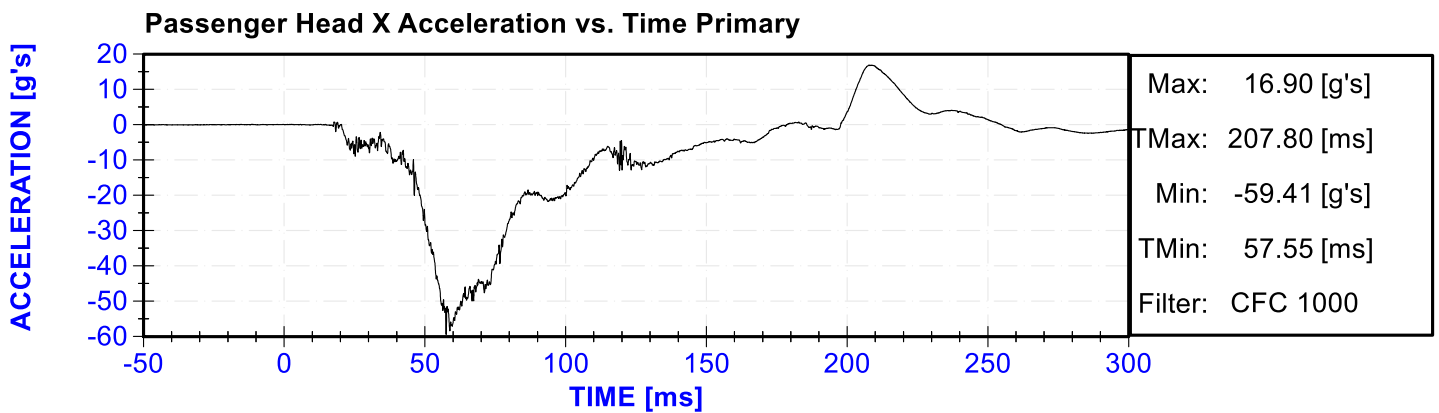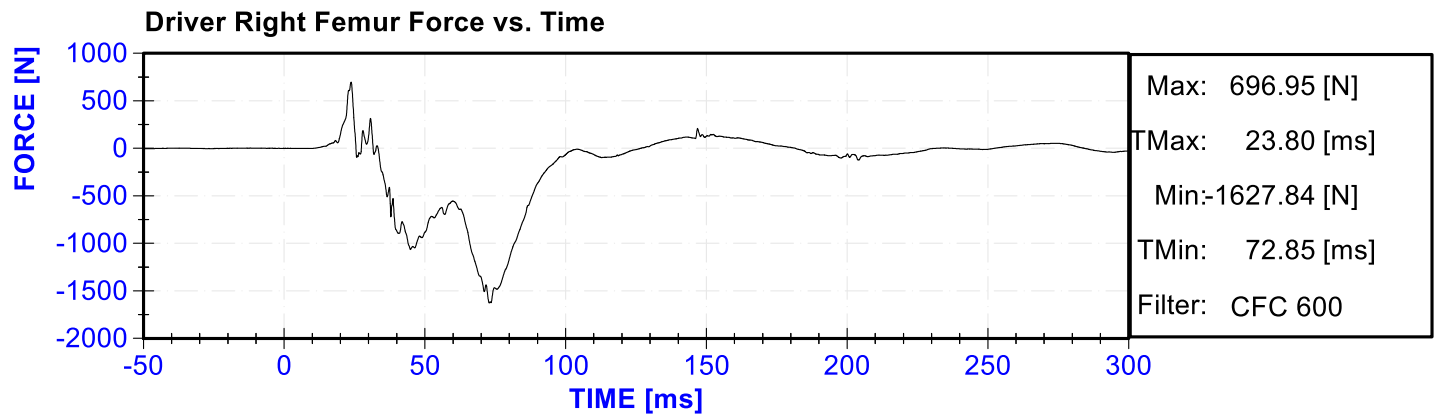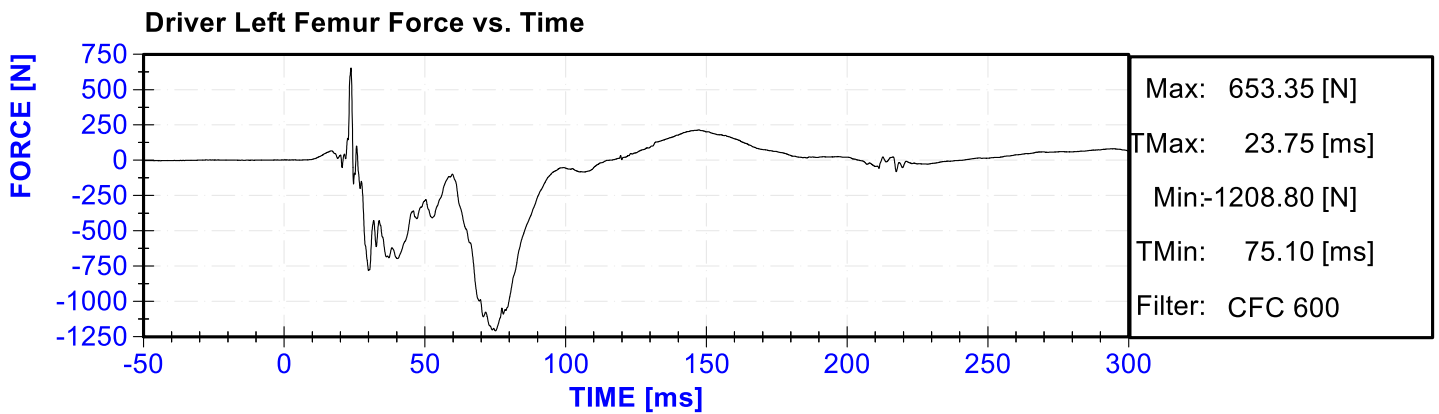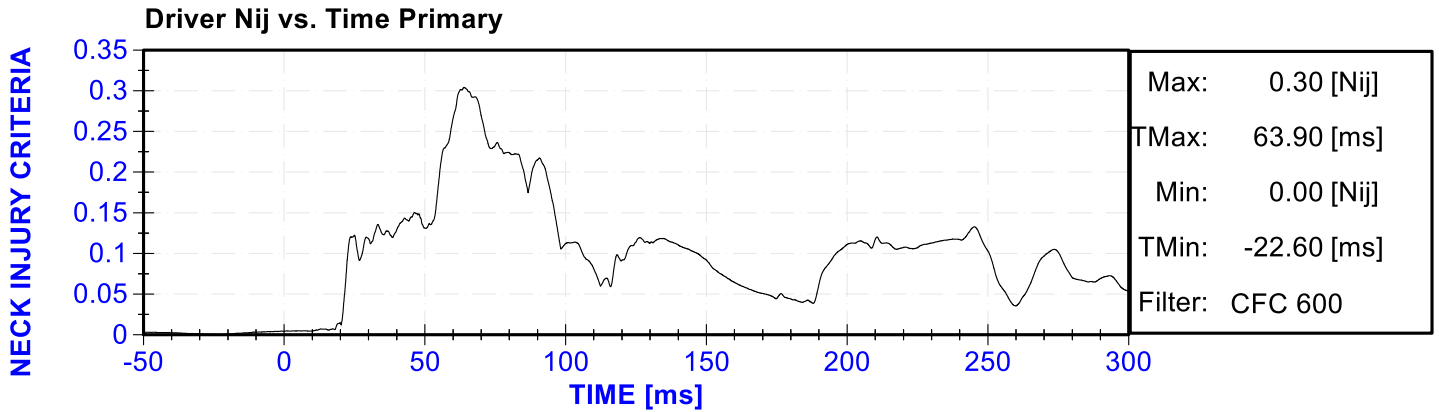

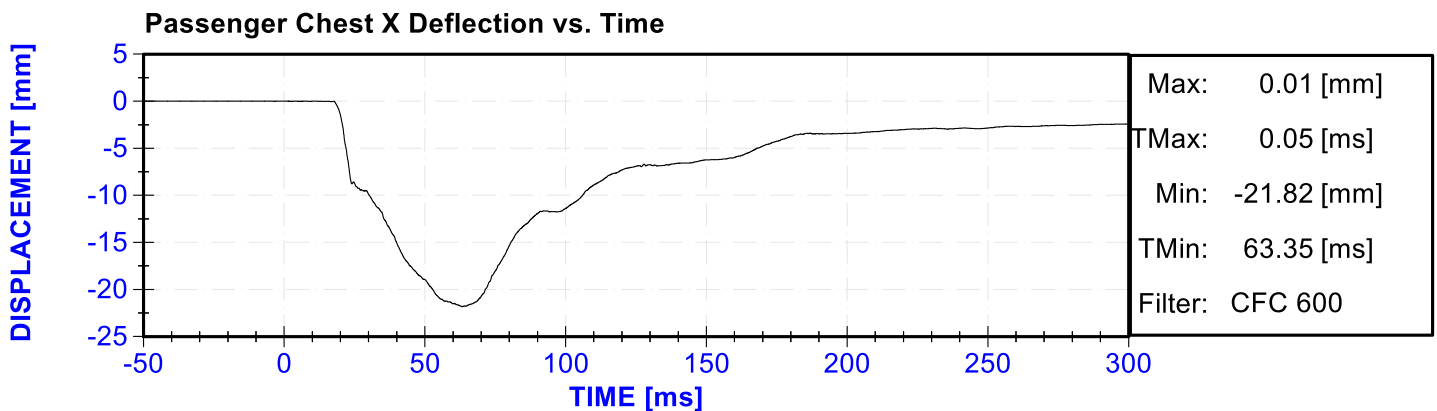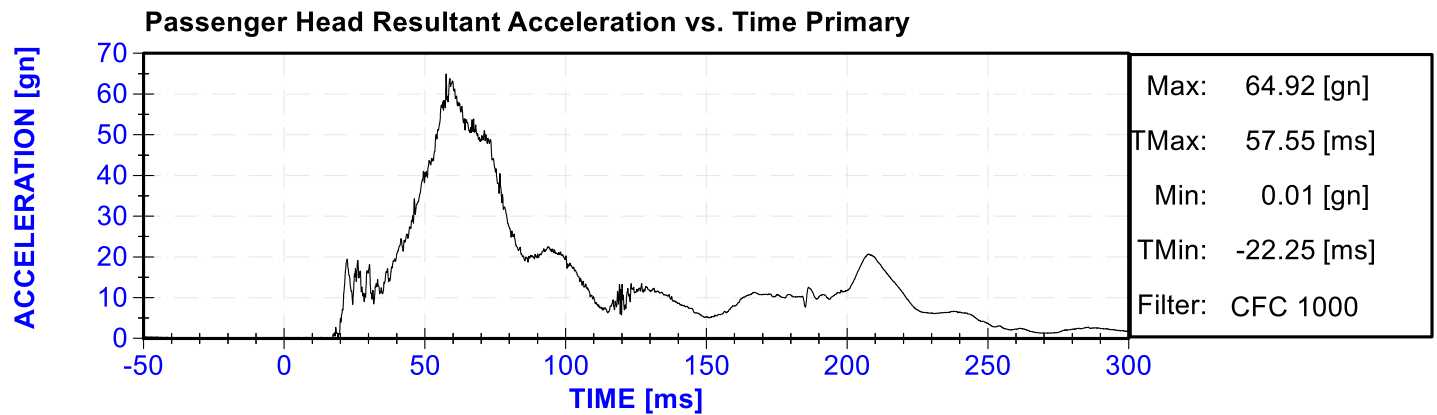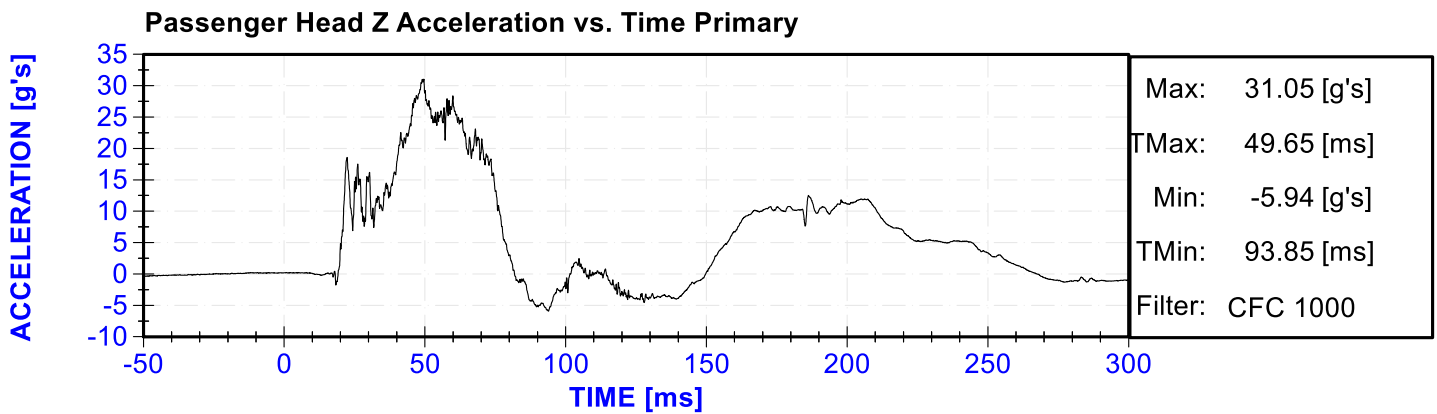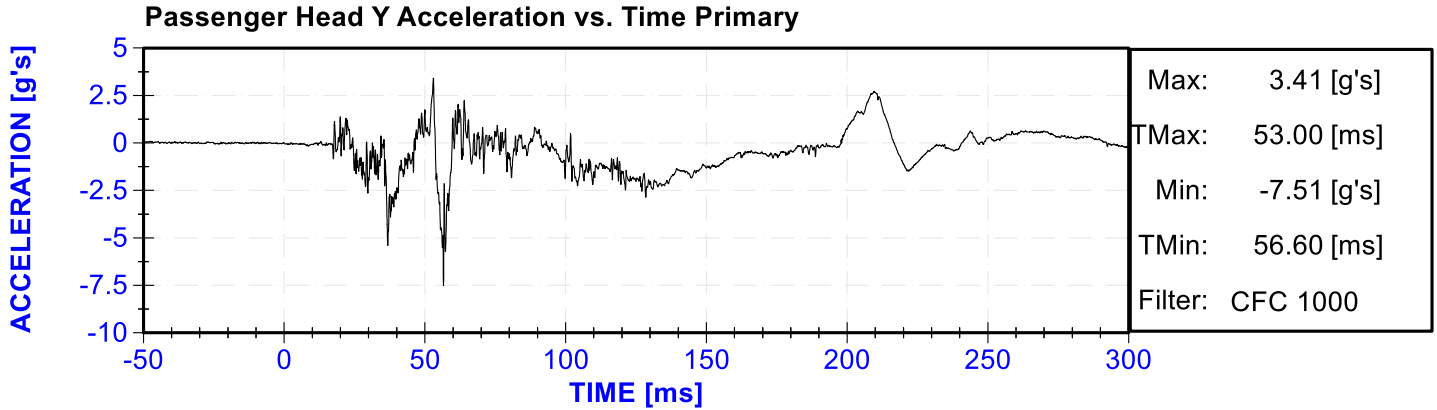


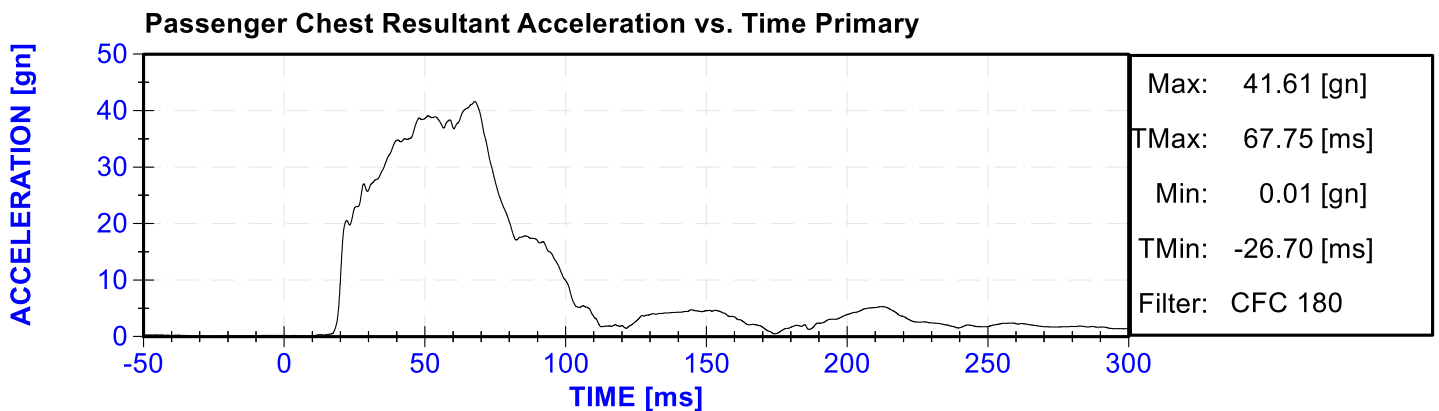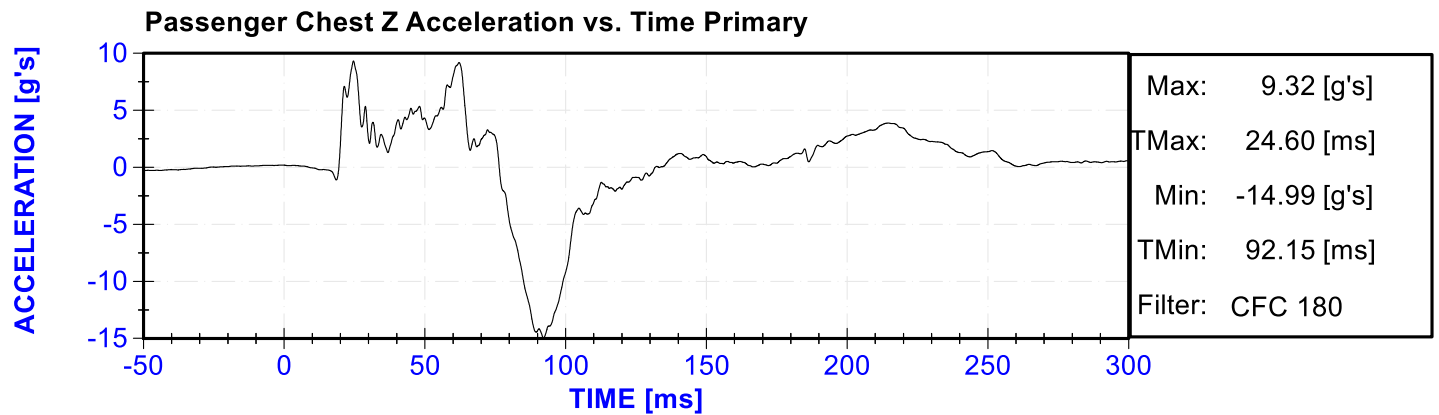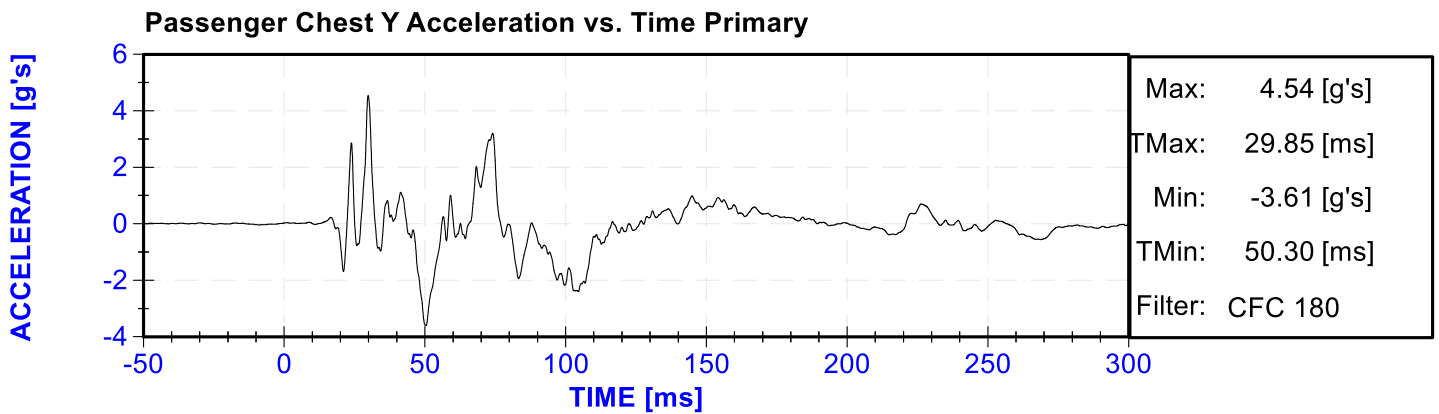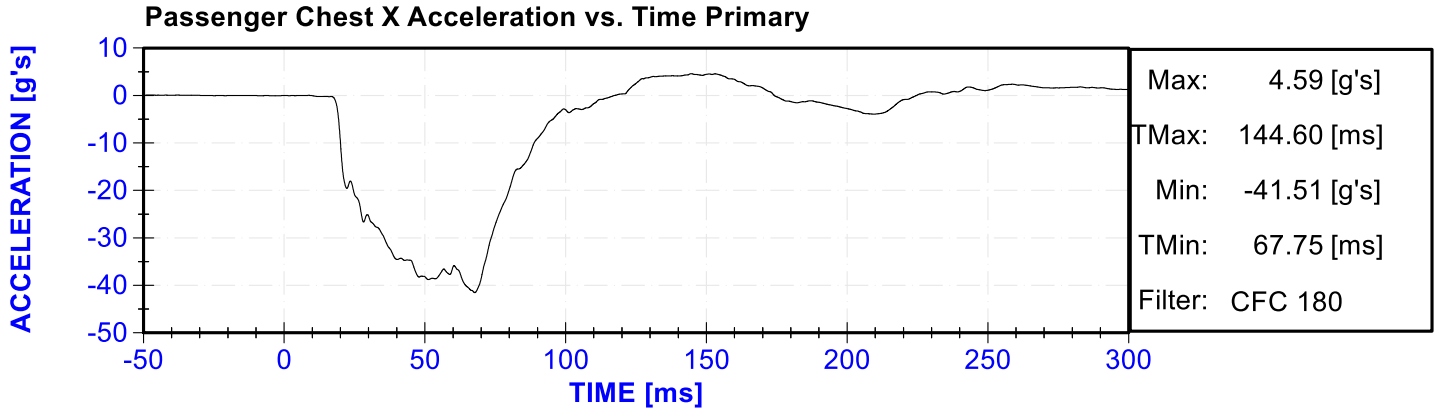




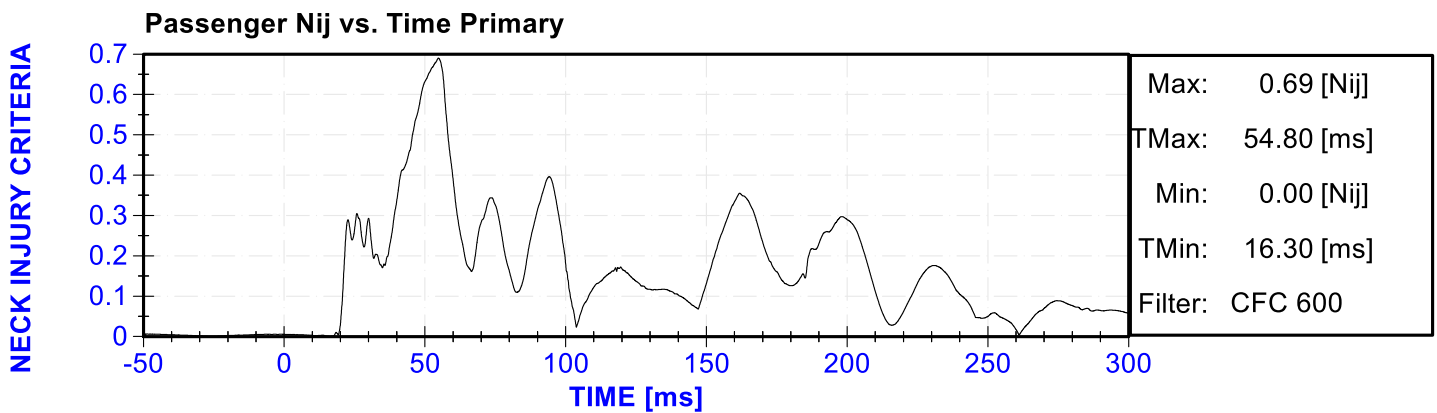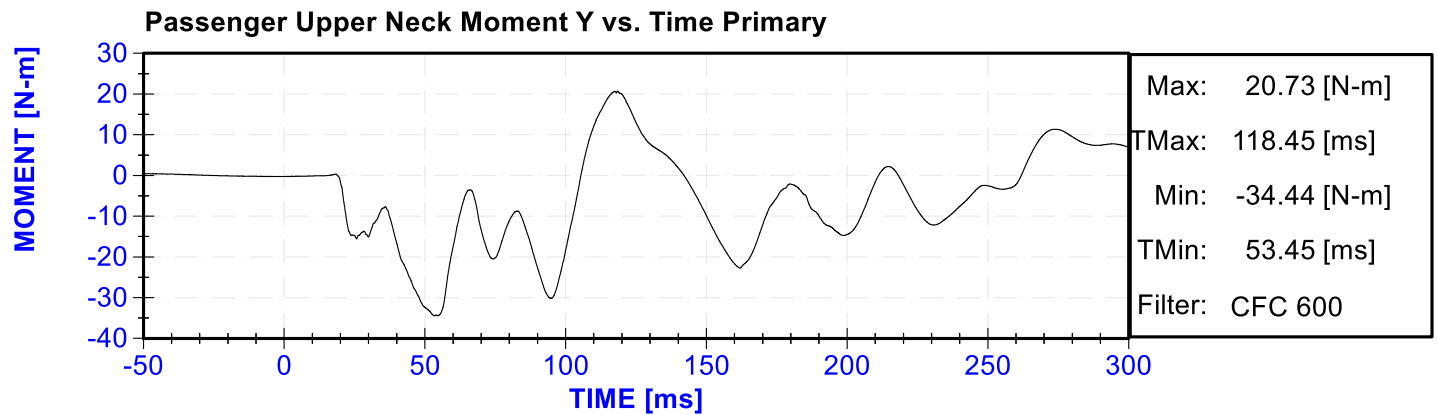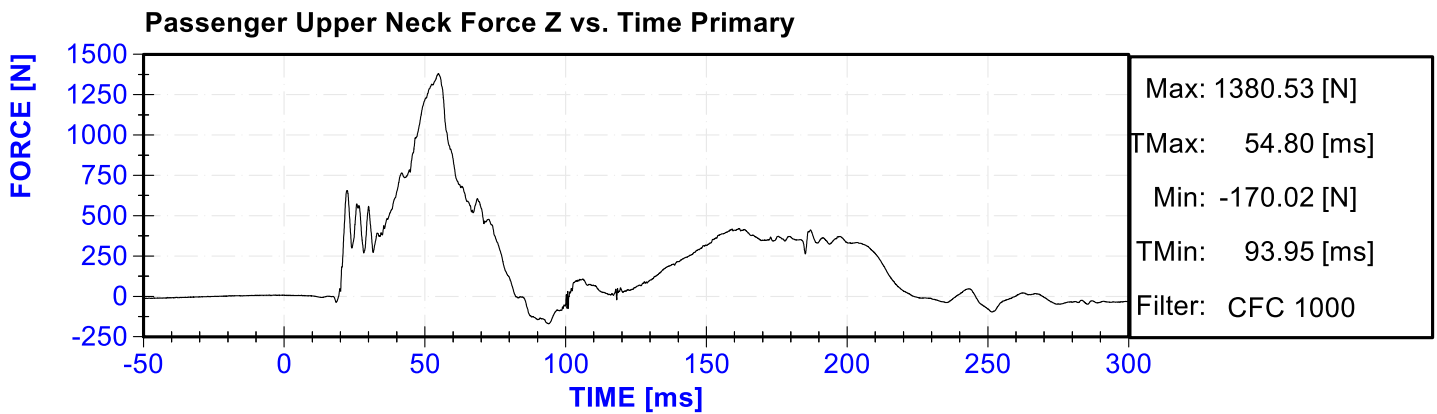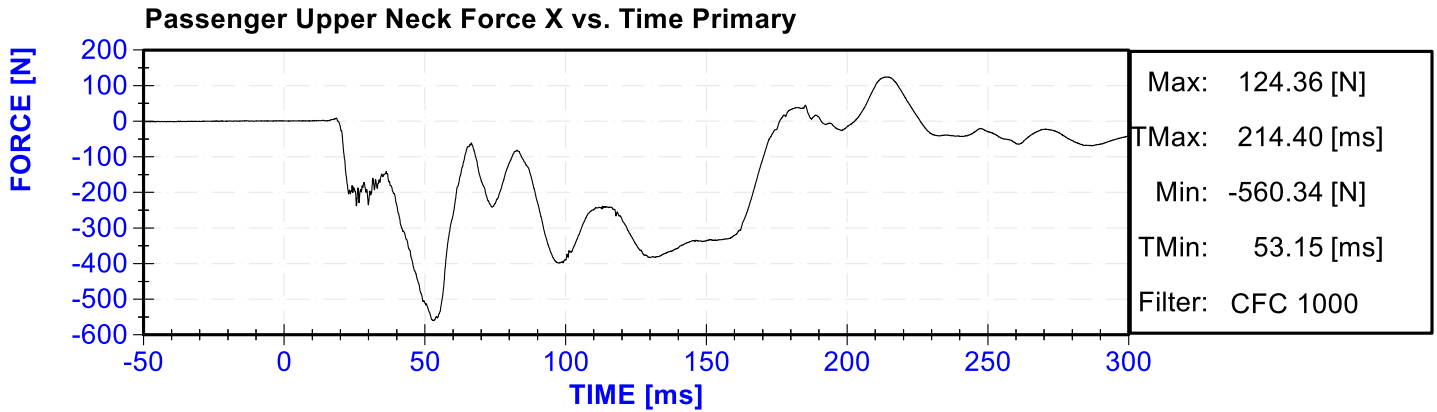

Passenger Left Femur Force vs. Time

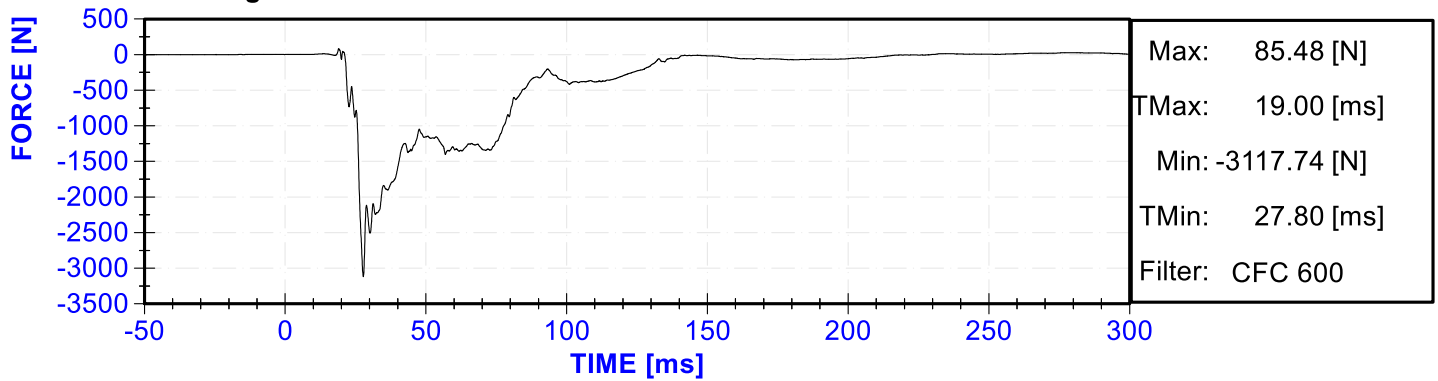

Passenger Right Femur Force vs. Time

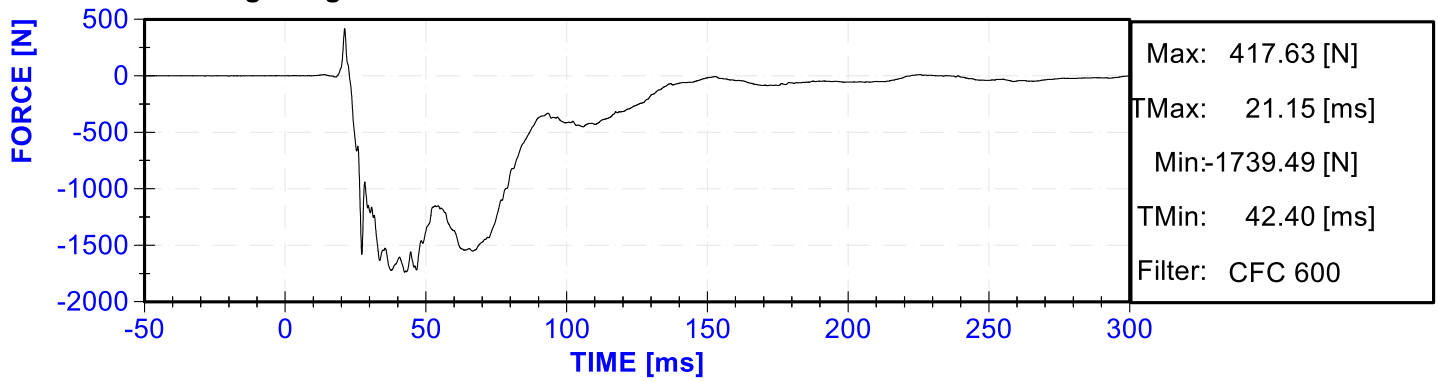

## **APPENDIX C**

### **DUMMY CALIBRATION AND PERFORMANCE VERIFICATION DATA**

**CALIBRATION TEST RESULTS**

**PRE-TEST**

**HYBRID III 50<sup>TH</sup> PERCENTILE MALE - DRIVER ATD**

**SERIAL NO: 142**





External Measurements - Hybrid 3 - 50th Male

Technician: K. Dutton

Date: 12/11/2020

Dummy Serial Number: 142

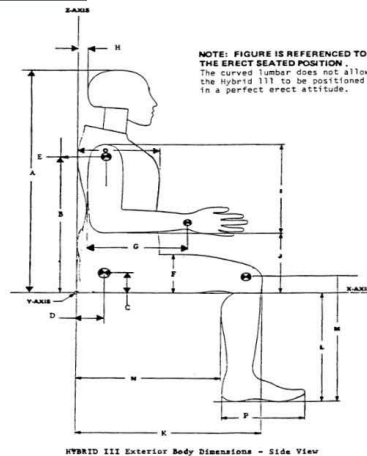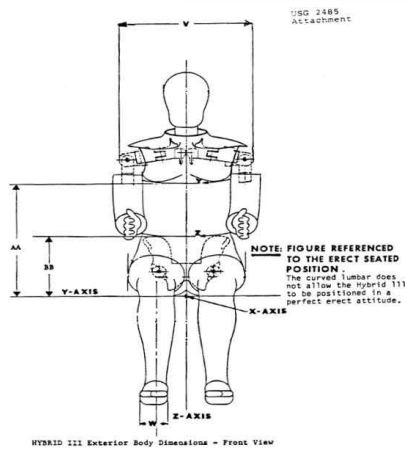

Symbol	Description	Specification (in)		Result (in)	Pass/Fail
A	Sitting Height	34.6	35.0	34.7	Pass
B	Shoulder Pivot Height	19.9	20.5	20.2	Pass
C	H-Point Height	3.3	3.5	3.4	Pass
D	H-Point from Backline	5.3	5.5	5.4	Pass
E	Shoulder Pivot from Backline	3.3	3.7	3.5	Pass
F	Thigh Clearance	5.5	6.1	5.9	Pass
G	Back of Elbow to Wrist Pivot	11.4	12.0	11.7	Pass
H	Head Back to Backline	1.6	1.8	1.7	Pass
I	Shoulder to Elbow Length	13.0	13.6	13.4	Pass
J	Elbow Rest Height	7.5	8.3	8.1	Pass
K	Buttock to Knee Length	22.8	23.8	23.1	Pass
L	Popliteal Height	16.9	17.9	17.4	Pass
M	Knee Pivot Height	19.1	19.7	19.5	Pass
N	Buttock Popliteal Length	17.8	18.8	18.3	Pass
O	Chest Depth without Jacket	8.4	9.0	8.6	Pass
P	Foot Length (right)	9.9	10.5	10.1	Pass
V	Shoulder Breadth	16.3	17.2	16.8	Pass
W	Foot Breadth	3.6	4.2	3.8	Pass
Y	Chest Circumference with Jacket	38.2	39.4	38.8	Pass
Z	Waist Circumference	32.9	34.1	33.7	Pass
AA	Reference Location (Chest Circumference)	16.9	17.1	17.0	Pass
BB	Reference Location (Waist Circumference)	8.9	9.1	9.0	Pass


ATD Manufacturer	Humanetics	Test Technician	E. Helenbrook
ATD Serial Number	142	Laboratory Supervisor	K. Brogan




**Results**

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	18.9	25.6	°C	21.5	Pass
Humidity	10	70	%	22.3	Pass
Resultant Acceleration	225	275	g's	243.1	Pass
Oscillation	0	10	%	2.6	Pass
Lateral Acceleration	-15	15	g's	5.9	Pass

**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
X Accelerometer	ENDEVCO 7264	P51681	11/3/2020	5/4/2021
Y Accelerometer	ENDEVCO 7264	P64151	11/3/2020	5/4/2021
Z Accelerometer	ENDEVCO 7264	P52114	11/3/2020	5/4/2021

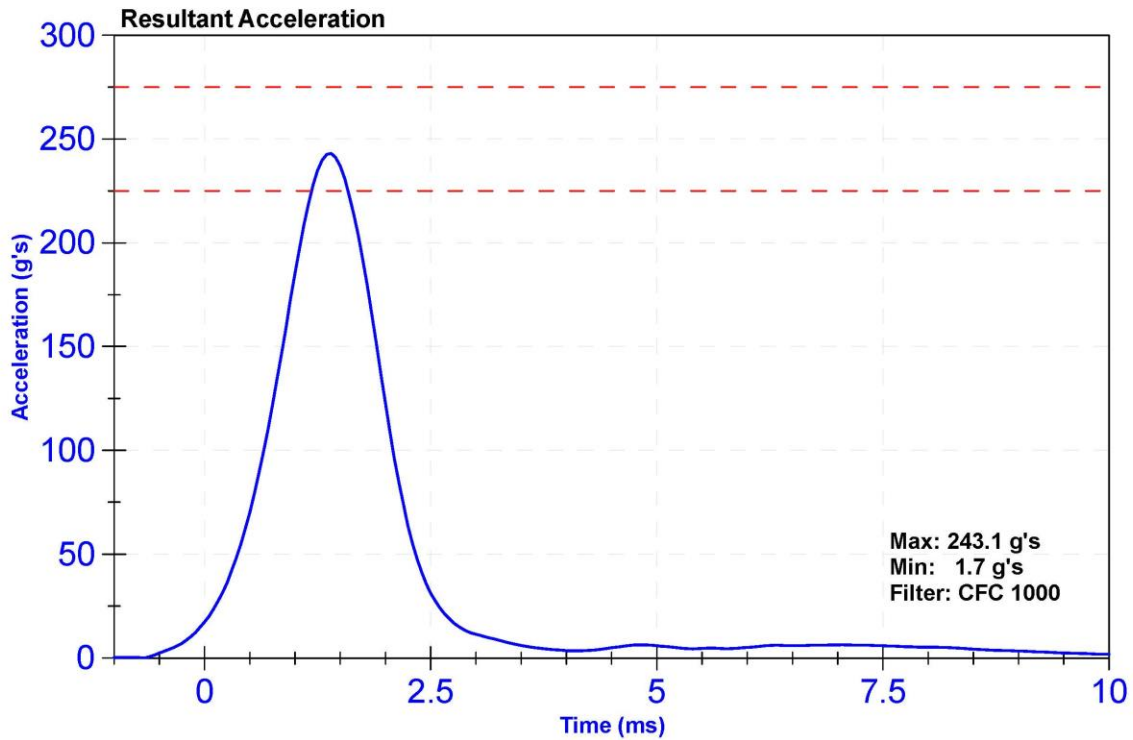

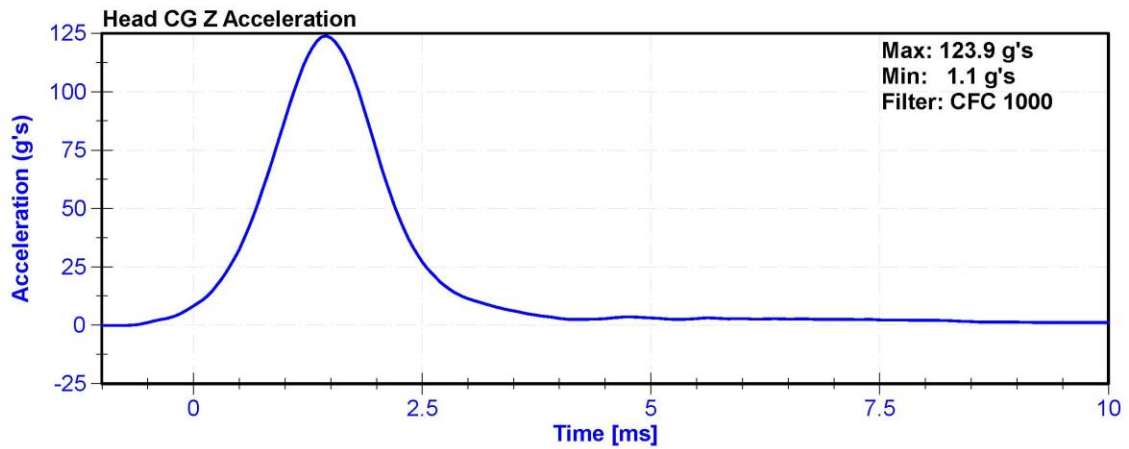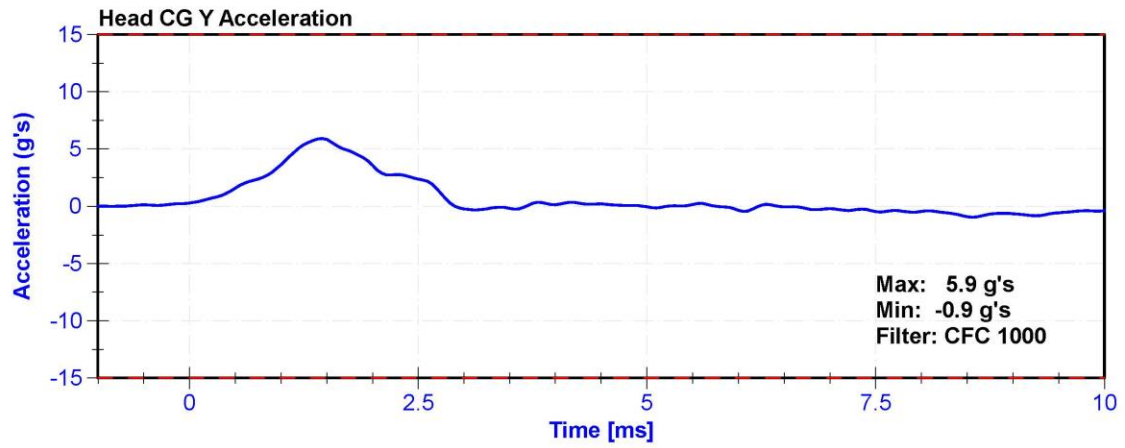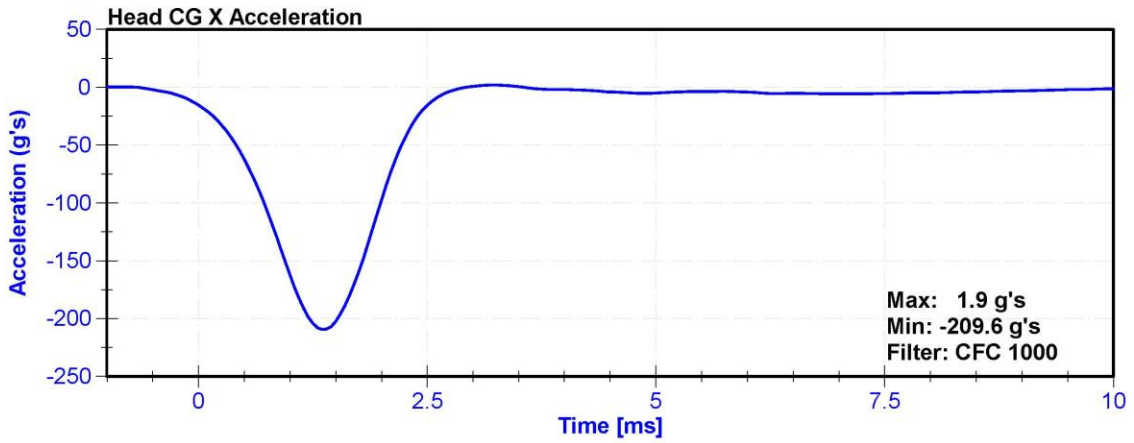

ATD Manufacturer	Humanetics	Test Technician	E. Helenbrook
ATD Serial Number	142	Laboratory Supervisor	K. Brogan



**Results**




Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21.5	Pass
Humidity	10	70	%	22.2	Pass
Velocity	6.89	7.13	m/s	6.958	Pass
Pendulum Deceleration at 10ms	22.5	27.5	g's	23.07	Pass
Pendulum Deceleration at 20ms	17.6	22.6	g's	20.65	Pass
Pendulum Deceleration at 30ms	12.5	18.5	g's	16.83	Pass
Max. Pendulum Deceleration After 30ms	0	29	g's	26.3	Pass
Pendulum Deceleration Time to 5 g's	34	42	ms	39.5	Pass
Maximum D Plane Rotation	64	78	deg	73.5	Pass
Time to Maximum Rotation	57	64	ms	63.2	Pass
Rotation Decay to Zero	113	127	ms	119.4	Pass
Moment About Occipital Condyle	88.1	108.4	Nm	98.11	Pass
Time to Maximum Moment	47	58	ms	51.5	Pass
Moment Decay to Zero	97	107	ms	105.0	Pass

**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	ENDEVCO 7231CT	AC-C16503 Striker	2/6/2020	2/5/2021
Pendulum Potentiometer	ETI SP22G	DS-LABPOT1	9/17/2020	9/17/2021
Condyle Potentiometer	ETI SP22G	DS-LABPOT2	9/17/2020	9/17/2021
Upper Neck Load Cell	DENTON 1716A	LC-2186Fx	11/10/2020	11/10/2021



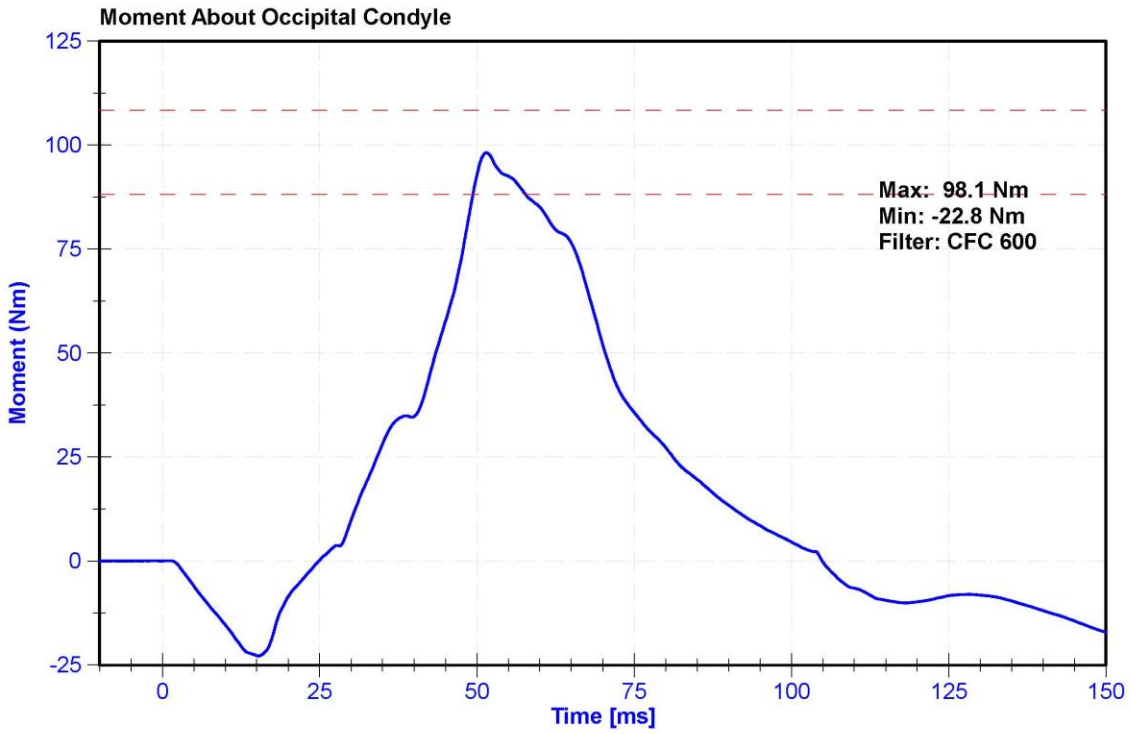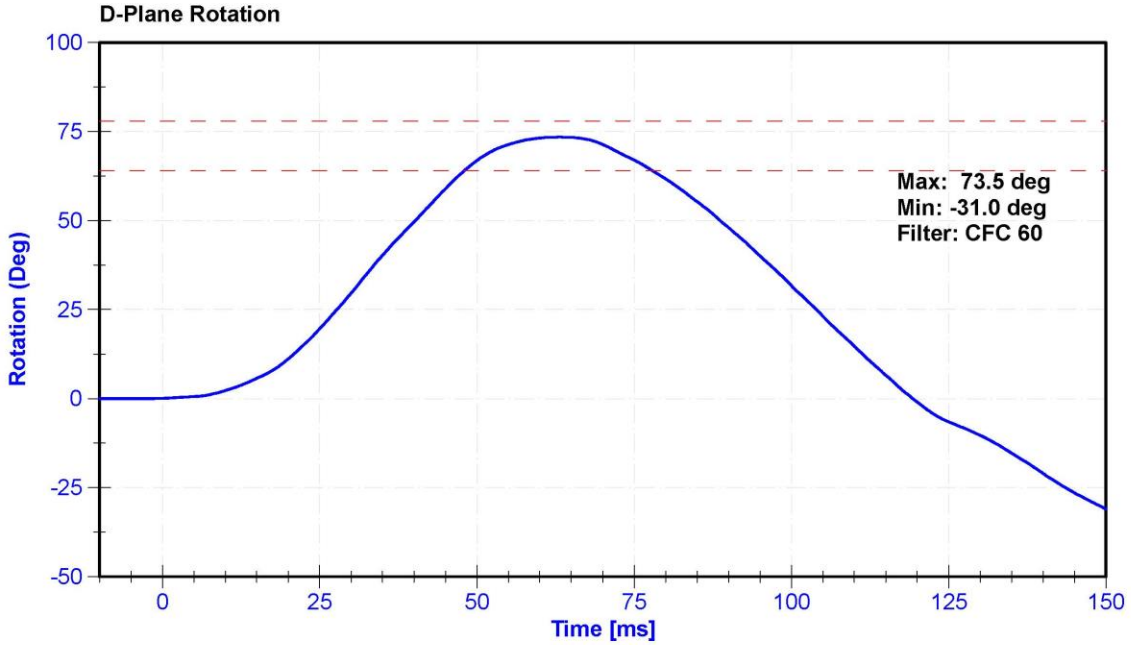

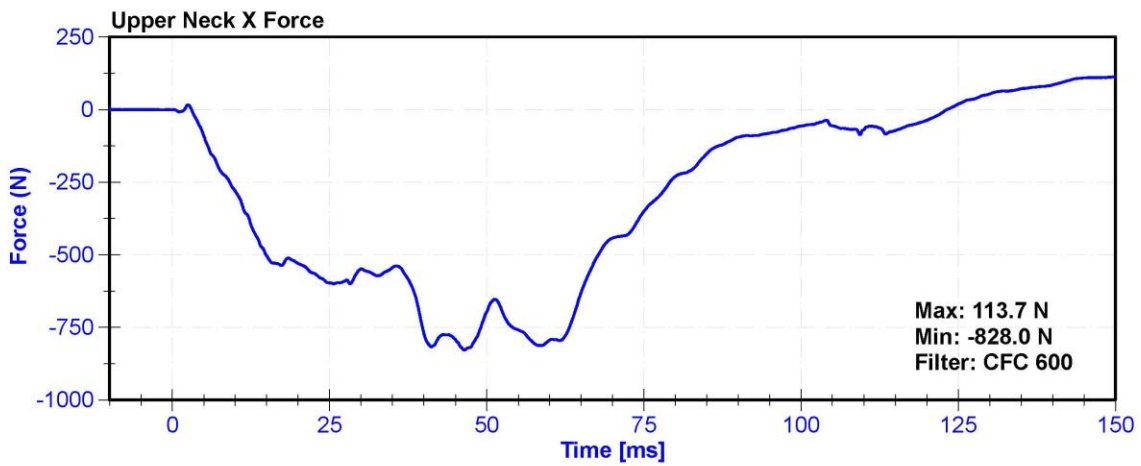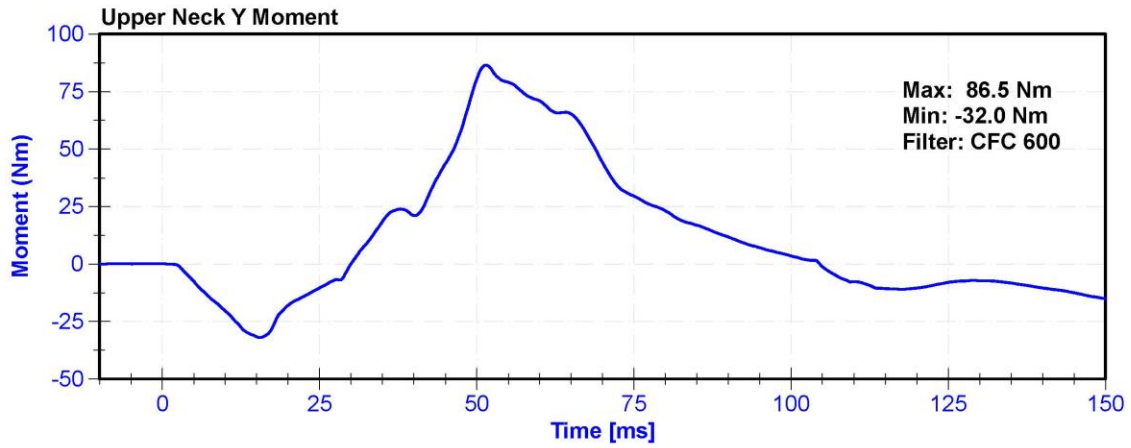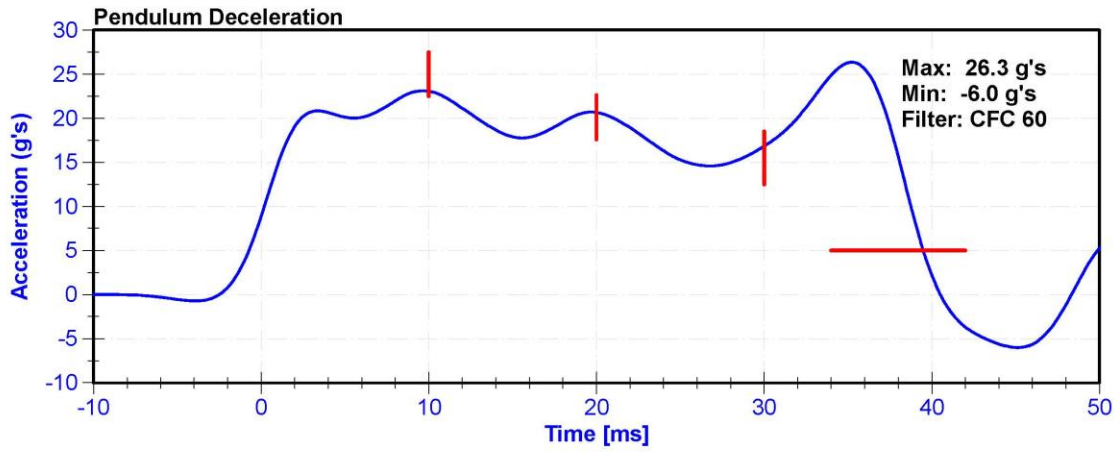



ATD Manufacturer	Humanetics	Test Technician	E. Helenbrook
ATD Serial Number	142	Laboratory Supervisor	K. Brogan




**Results**

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21.5	Pass
Humidity	10	70	%	22.3	Pass
Velocity	5.94	6.19	m/s	5.964	Pass
Pendulum Deceleration at 10ms	17.2	21.2	g's	19.57	Pass
Pendulum Deceleration at 20ms	14	19	g's	18.5	Pass
Pendulum Deceleration at 30ms	11	16	g's	15.0	Pass
Max. Pendulum Deceleration After 30ms	0	22	g's	19.6	Pass
Pendulum Deceleration Time to 5 g's	38	46	ms	42.1	Pass
Maximum D Plane Rotation	81	106	deg	99.7	Pass
Time to Maximum Rotation	72	82	ms	78.3	Pass
Rotation Decay to Zero	147	174	ms	157.2	Pass
Minimum Moment About OC	-80	-52.9	Nm	-73.31	Pass
Time to Minimum Moment	65	79	ms	71.5	Pass
Moment Decay to Zero	120	148	ms	140.2	Pass

**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	ENDEVCO 7231CT	AC-C16503 Striker	2/6/2020	2/5/2021
Pendulum Potentiometer	ETI SP22G	DS-LABPOT1	9/17/2020	9/17/2021
Condyle Potentiometer	ETI SP22G	DS-LABPOT2	9/17/2020	9/17/2021
Upper Neck Load Cell	DENTON 1716A	LC-2186Fx	11/10/2020	11/10/2021

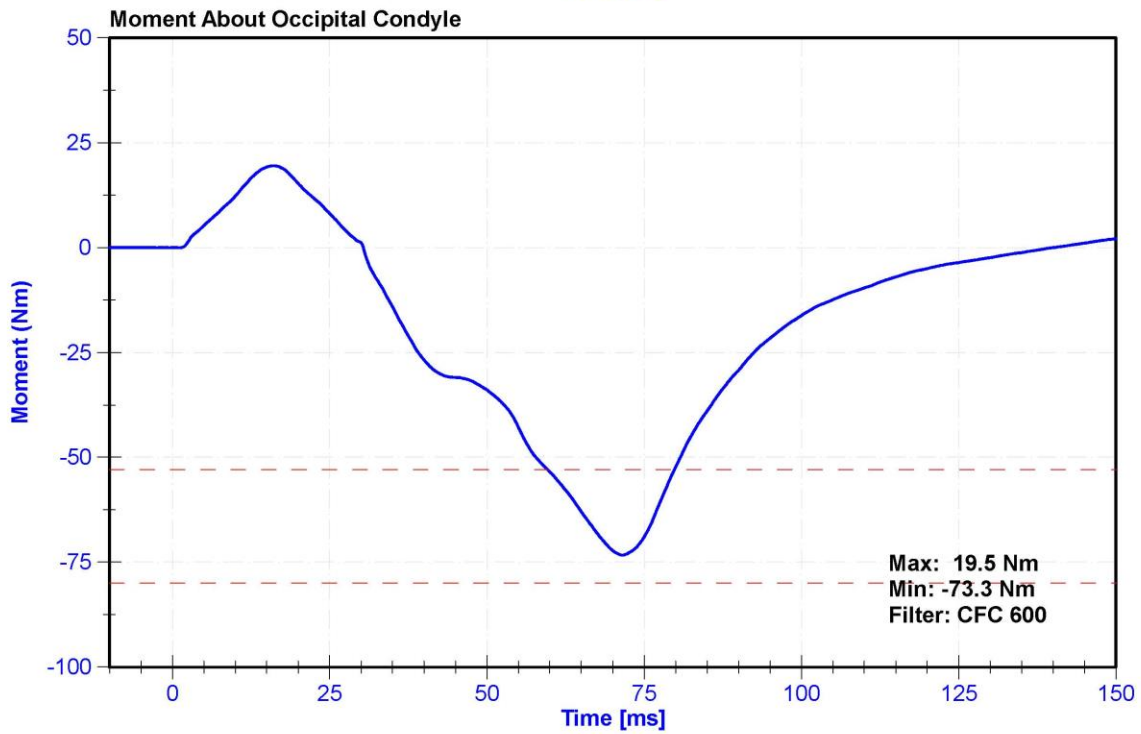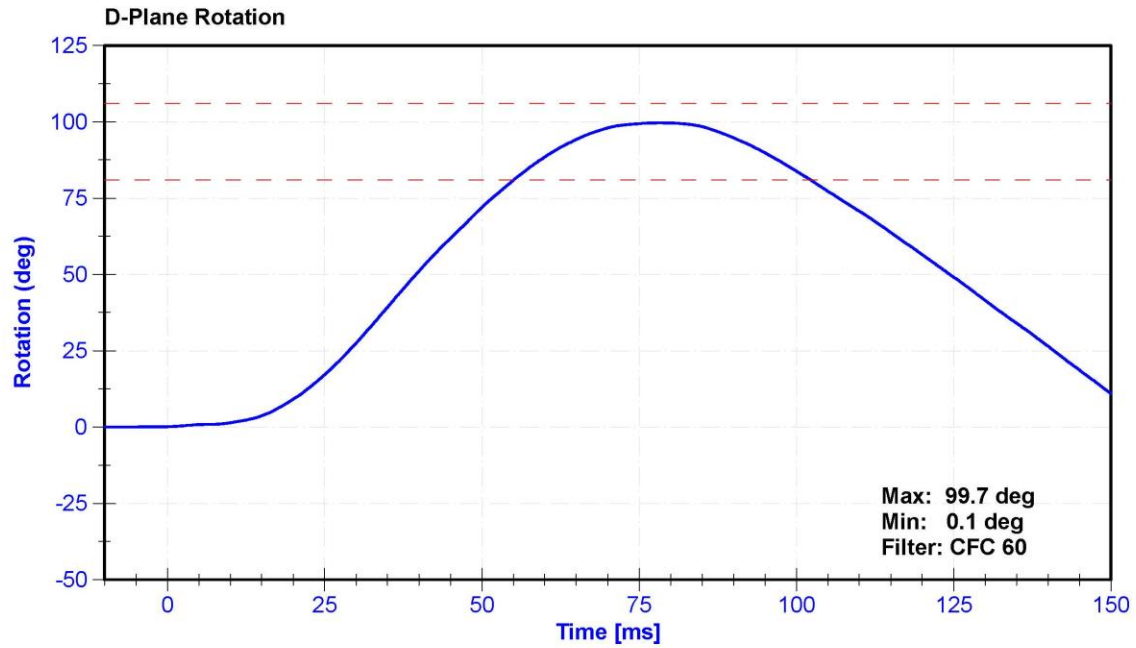

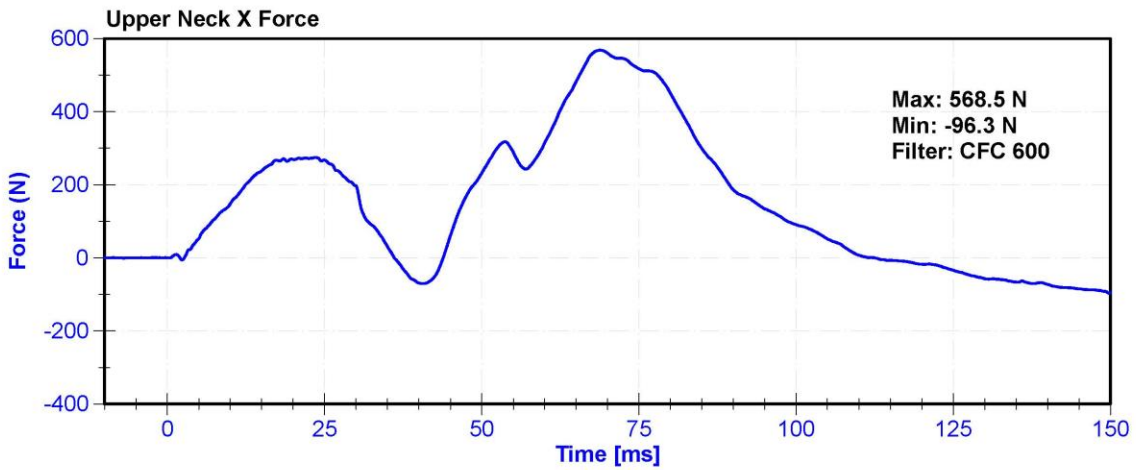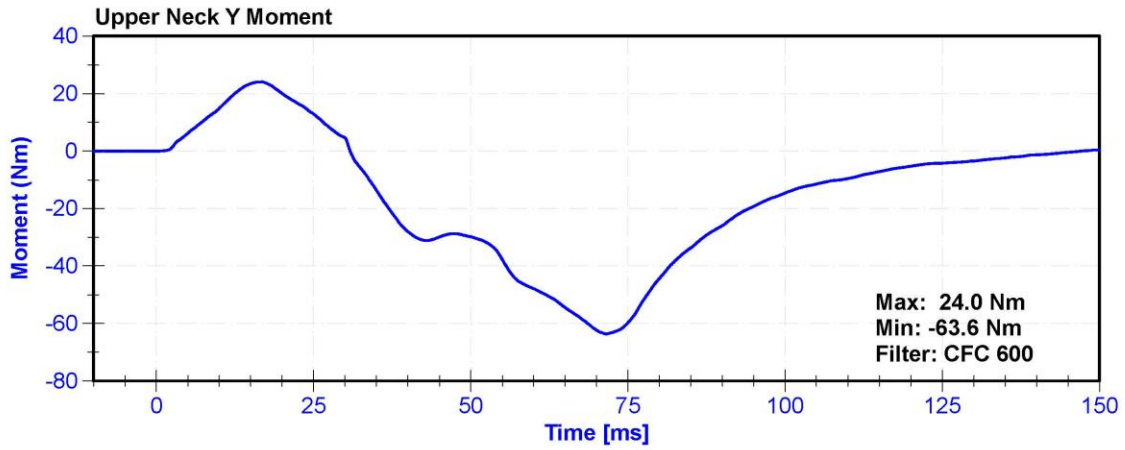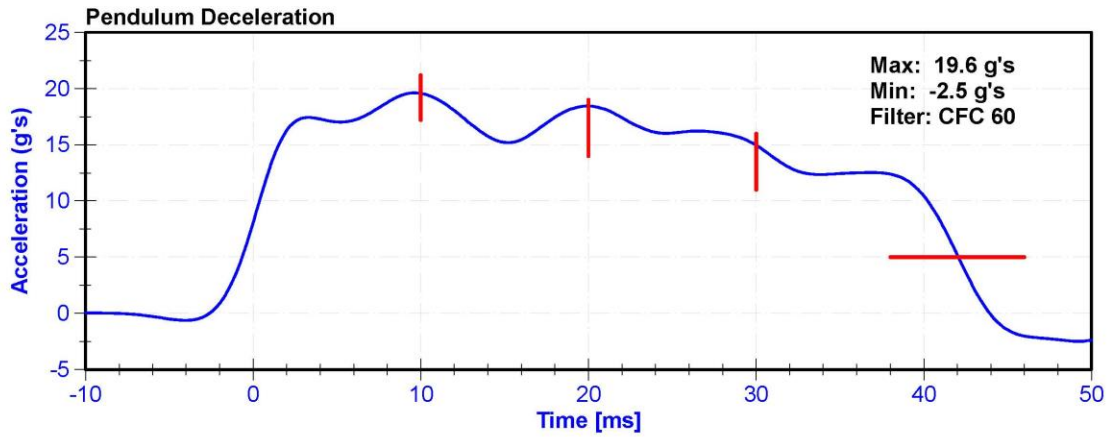


ATD Manufacturer	Humanetics	Test Technician	E. Helenbrook
ATD Serial Number	142	Laboratory Supervisor	K. Brogan



**Results**



Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	20.6	Pass
Humidity	10	70	%	22.3	Pass
Velocity	6.59	6.83	m/s	6.655	Pass
Chest Displacement	-72.6	-63.5	mm	-69.50	Pass
Resistive Force	5160	5894	N	5688.7	Pass
Hysteresis	65	85	%	70.6	Pass

**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	MSI 64C-2000	A286228	1/29/2020	1/28/2021
Chest Potentiometer	Servo 6209-2038	DS-142	11/19/2020	5/20/2021

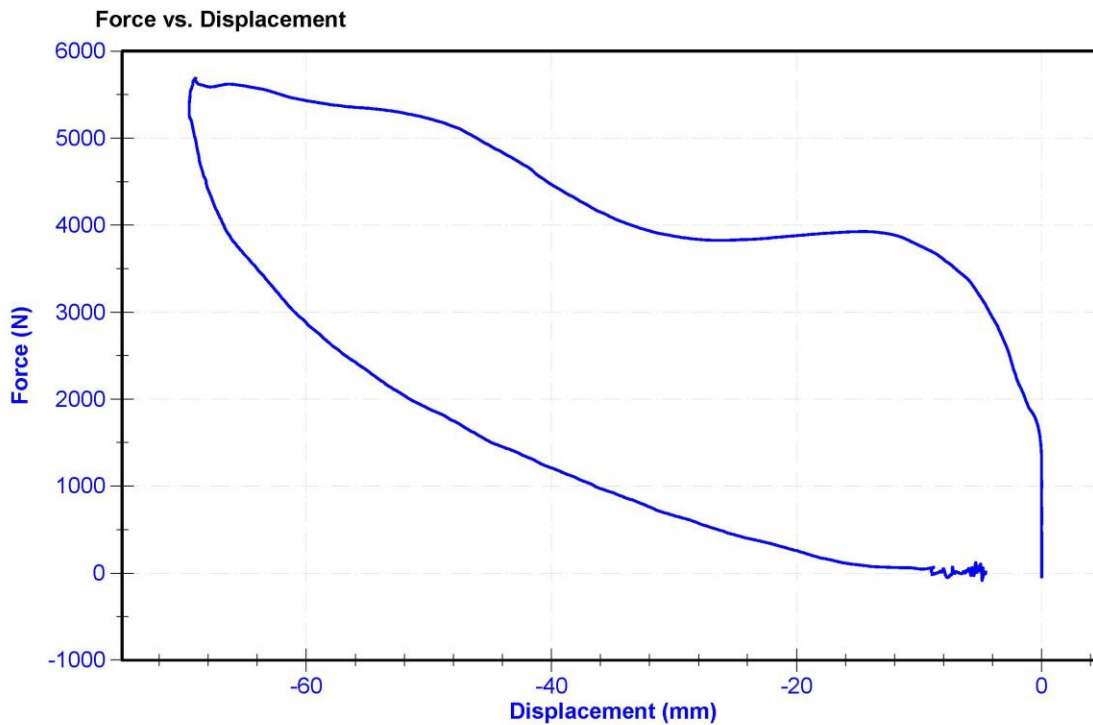

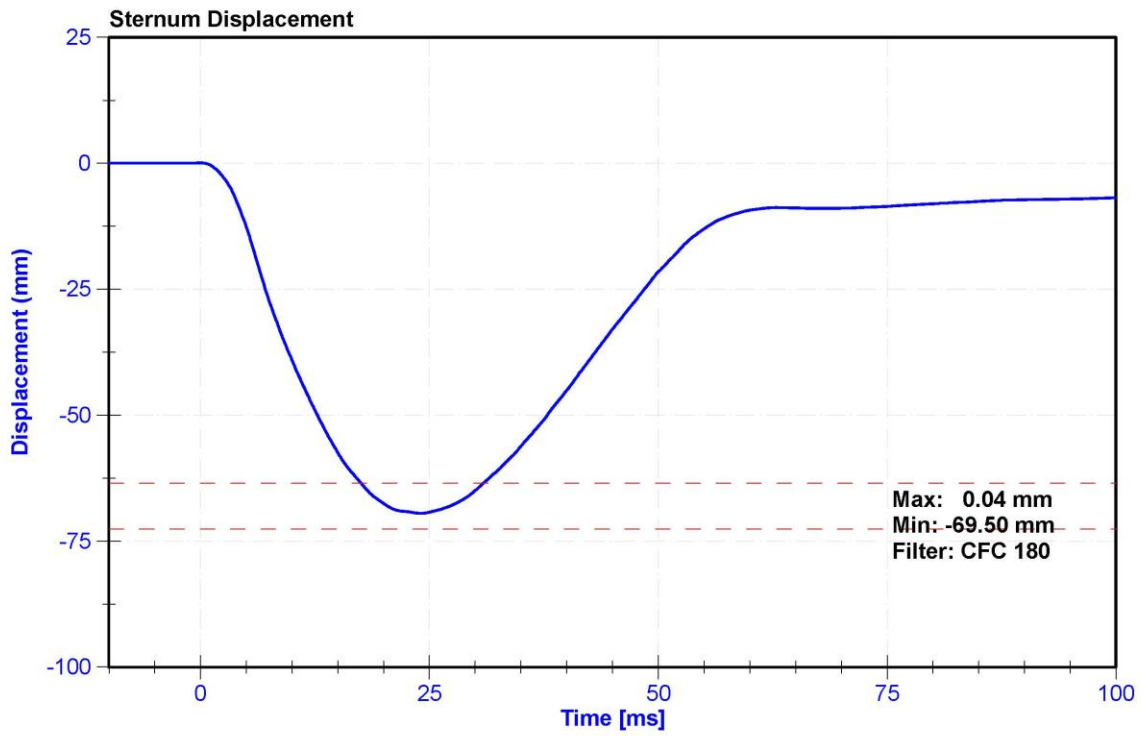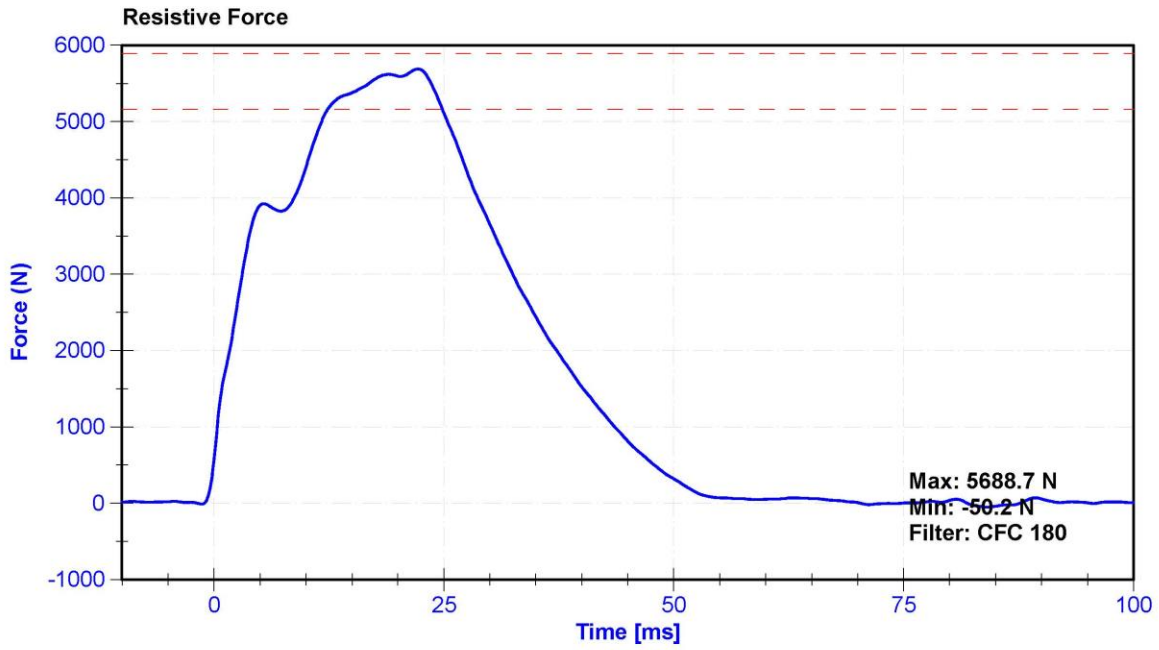

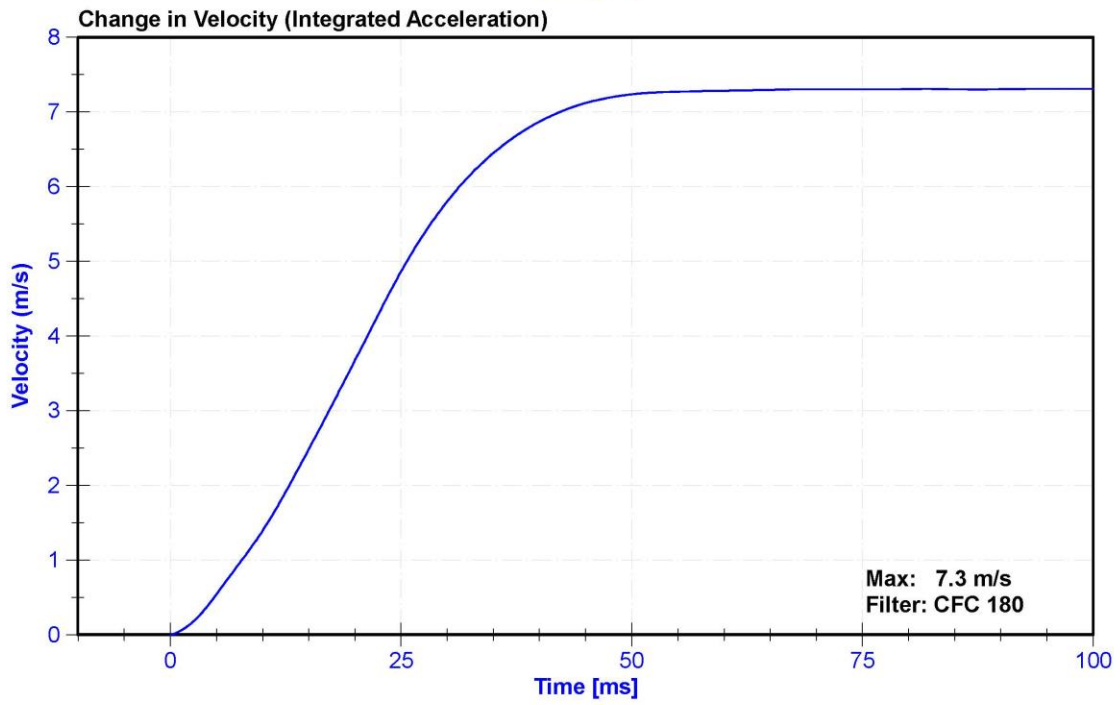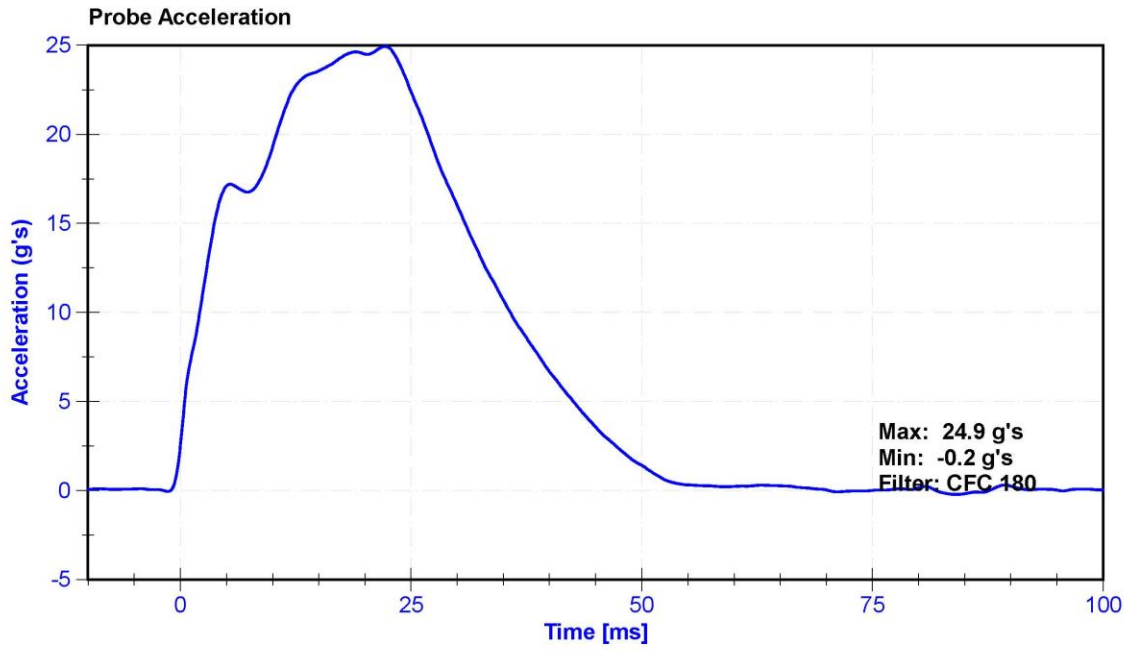




ATD Manufacturer	Humanetics	Test Technician	E. Helenbrook
ATD Serial Number	142	Laboratory Supervisor	K. Brogan

**Results**

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	18.9	25.6	°C	21.5	Pass
Humidity	10	70	%	22.3	Pass
Average Velocity	5	10	deg/s	7.2	Pass
Angle at 203Nm	40	50	deg	42.9	Pass
Moment at 30 degrees	0	94.9	Nm	92.8	Pass

**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Potentiometer	ETI SP22	DS-0008	9/18/2020	9/18/2021
Load Cell	Key Trans 2301-02	LC-115 My	9/12/2020	9/12/2021

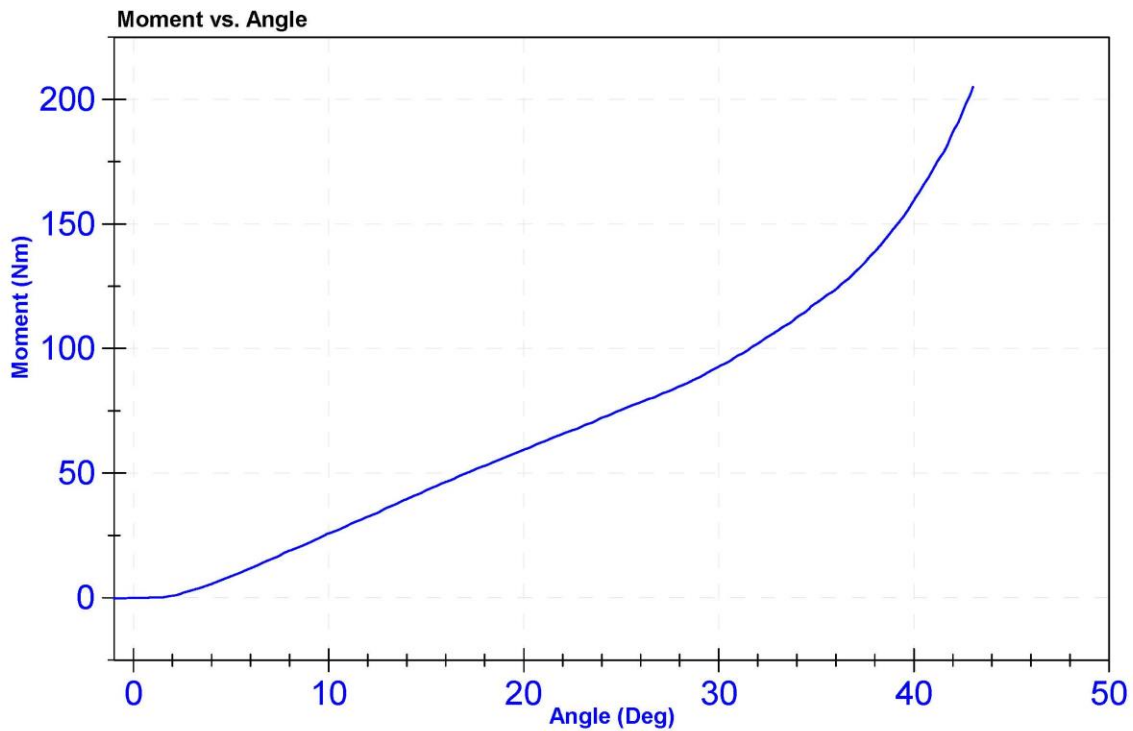


ATD Manufacturer	Humanetics	Test Technician	E. Helenbrook
ATD Serial Number	142	Laboratory Supervisor	K. Brogan

**Results**

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	18.9	25.6	°C	21.5	Pass
Humidity	10	70	%	22.3	Pass
Average Velocity	5	10	deg/s	7.2	Pass
Angle at 203Nm	40	50	deg	45.6	Pass
Moment at 30 degrees	0	94.9	Nm	93.8	Pass

**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Potentiometer	ETI SP22	DS-0008	9/18/2020	9/18/2021
Load Cell	Key Trans 2301-02	LC-115 My	9/12/2020	9/12/2021

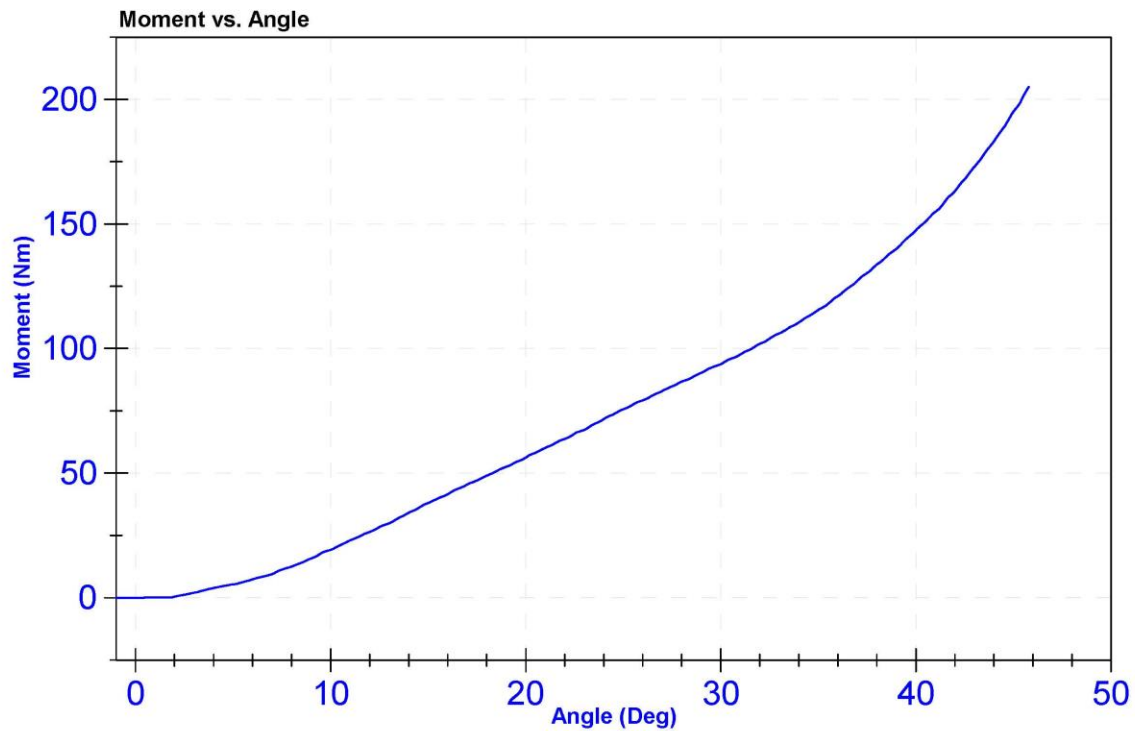


ATD Manufacturer	Humanetics	Test Technician	E. Helenbrook
ATD Serial Number	142	Laboratory Supervisor	K. Brogan



**Results**

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	18.9	25.6	°C	21.6	Pass
Humidity	10	70	%	22.3	Pass
Velocity	2.07	2.13	m/s	2.093	Pass
Maximum Resistive Force	4720	5780	N	5687.7	Pass

**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	MSI 64C-2000	A279031	5/8/2020	5/8/2021

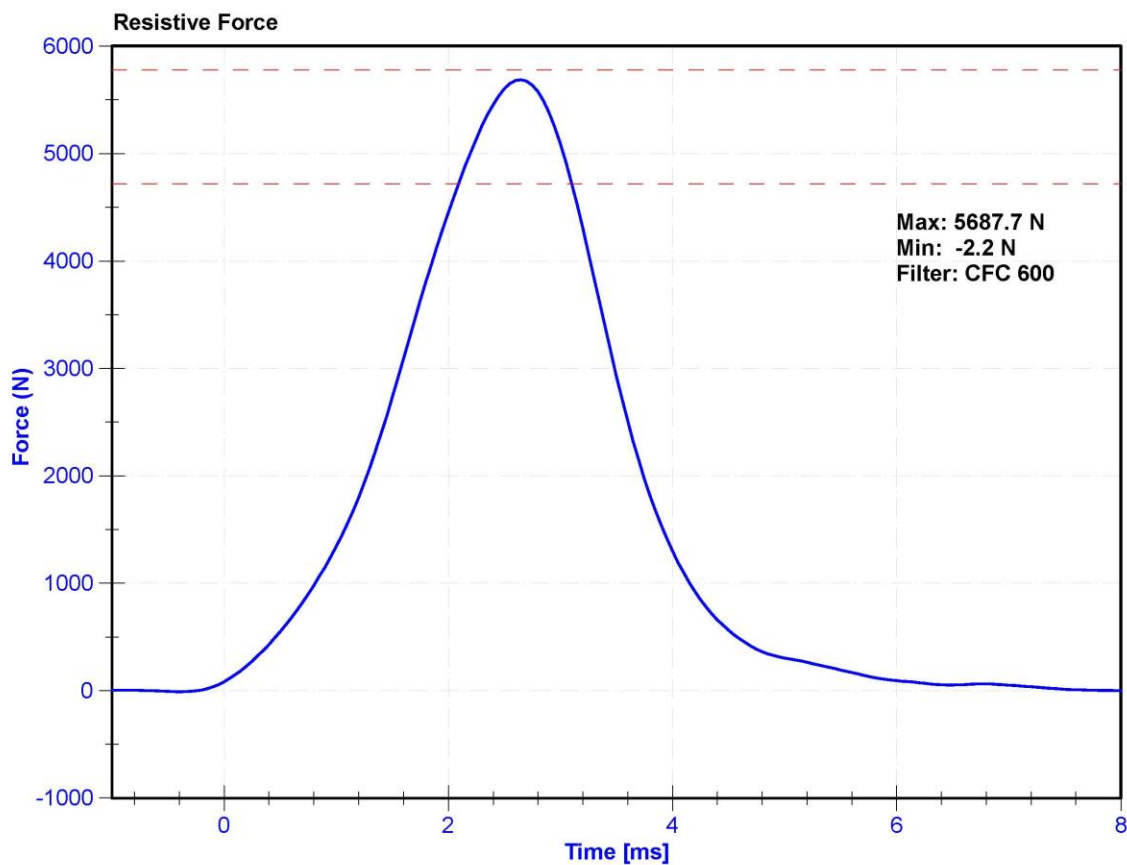

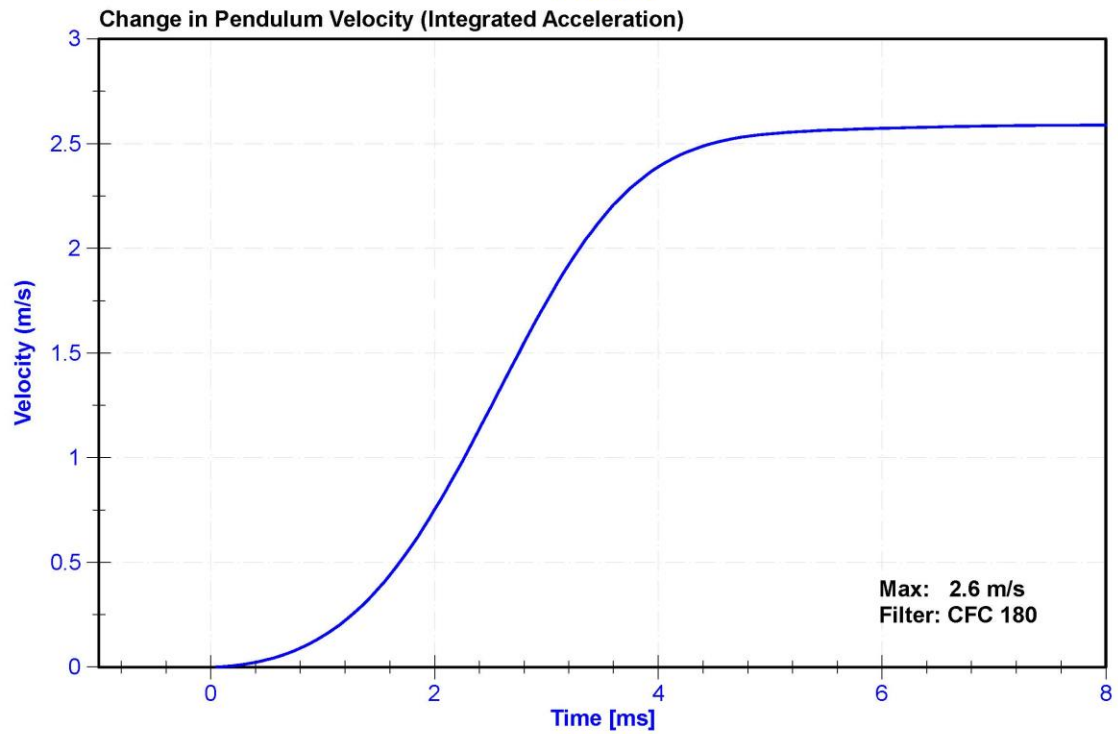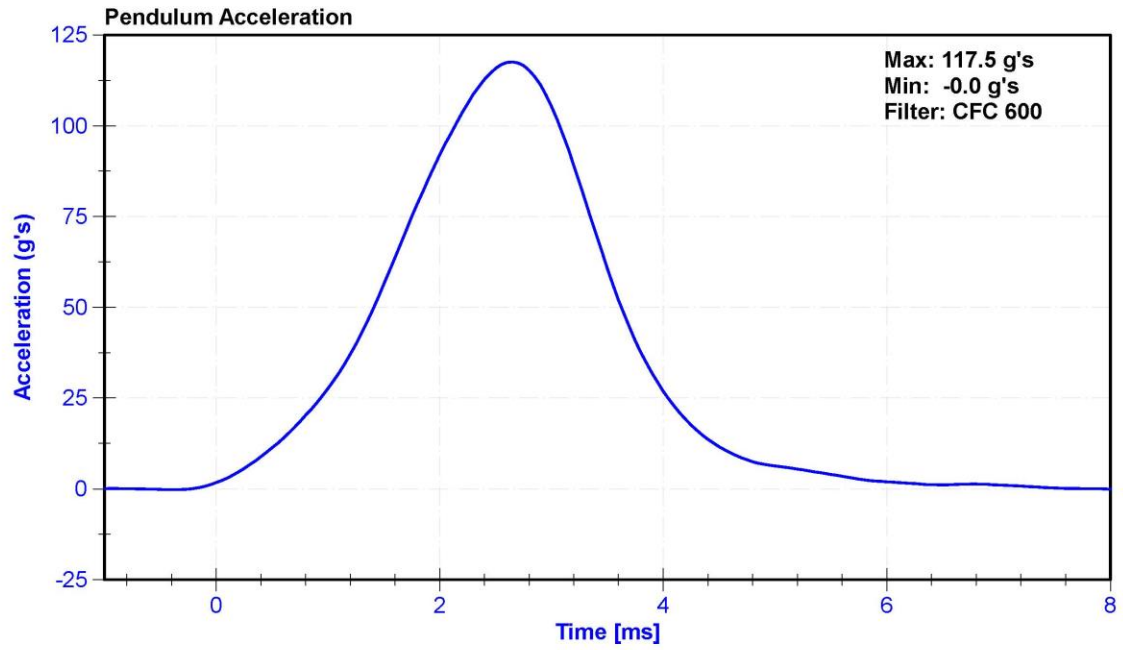


ATD Manufacturer	Humanetics	Test Technician	E. Helenbrook
ATD Serial Number	142	Laboratory Supervisor	K. Brogan



**Results**

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	18.9	25.6	°C	21.6	Pass
Humidity	10	70	%	22.3	Pass
Velocity	2.07	2.13	m/s	2.096	Pass
Maximum Resistive Force	4720	5780	N	5521.5	Pass

**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	MSI 64C-2000	A286228	1/29/2020	1/28/2021

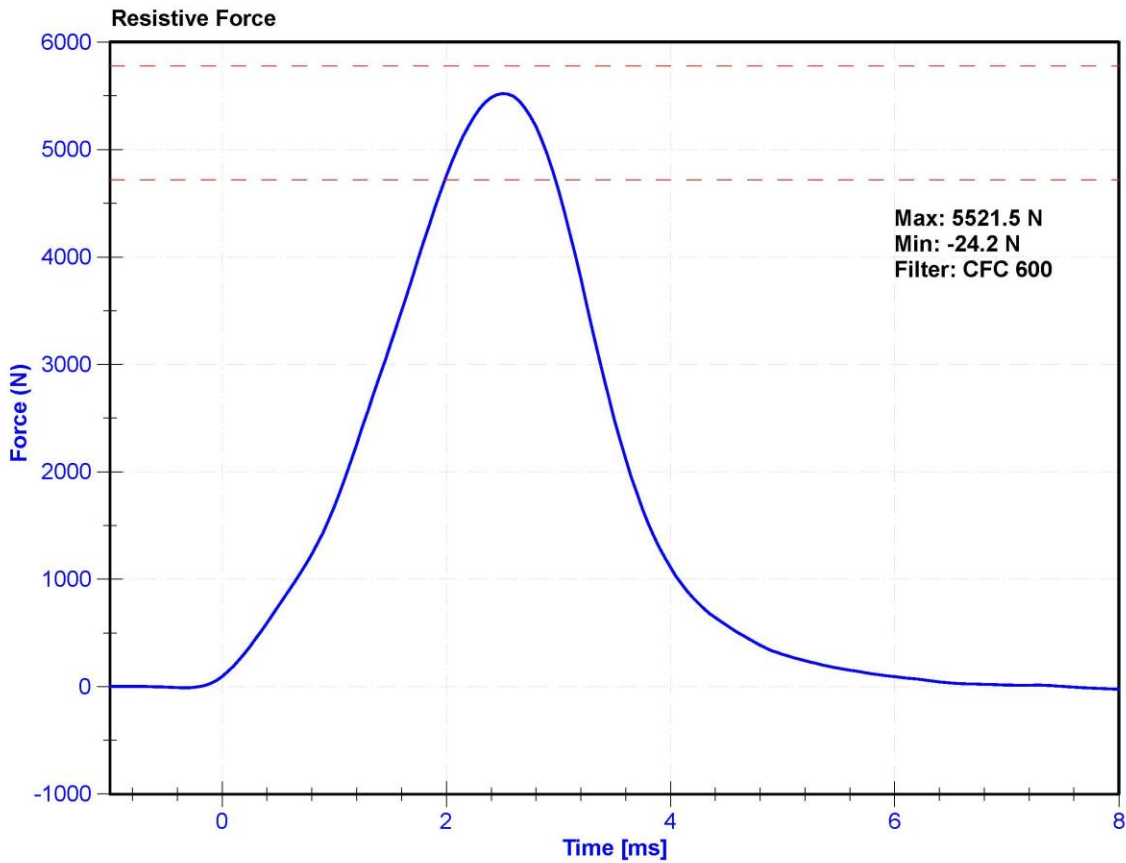

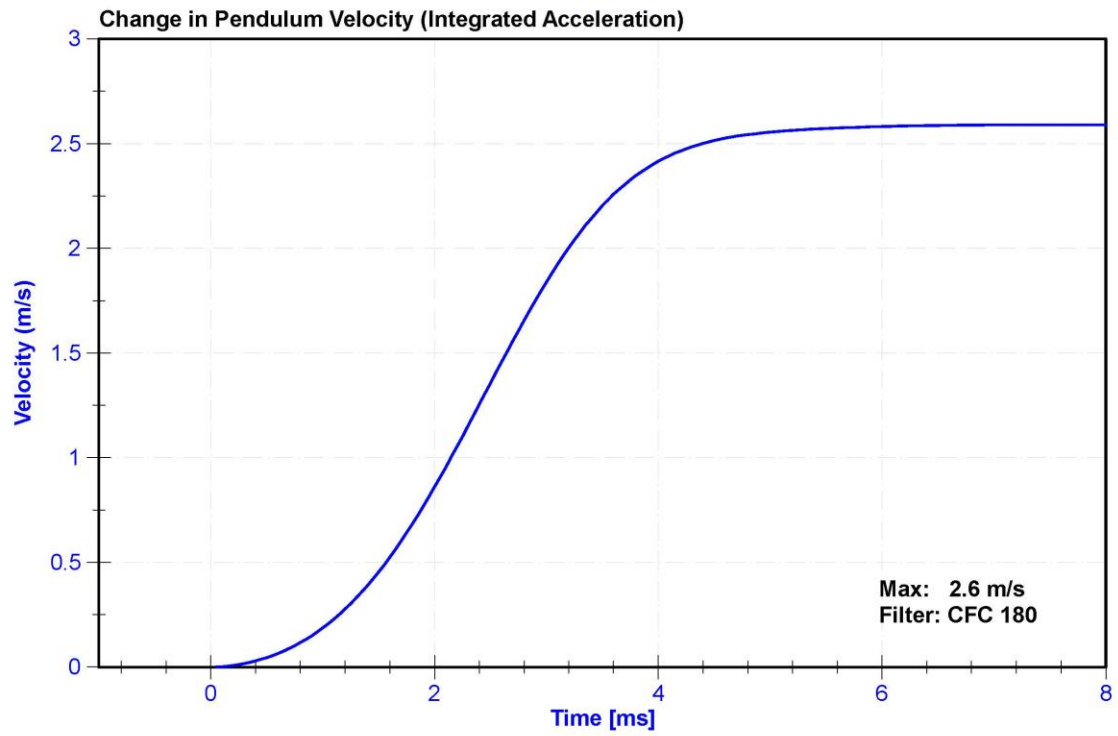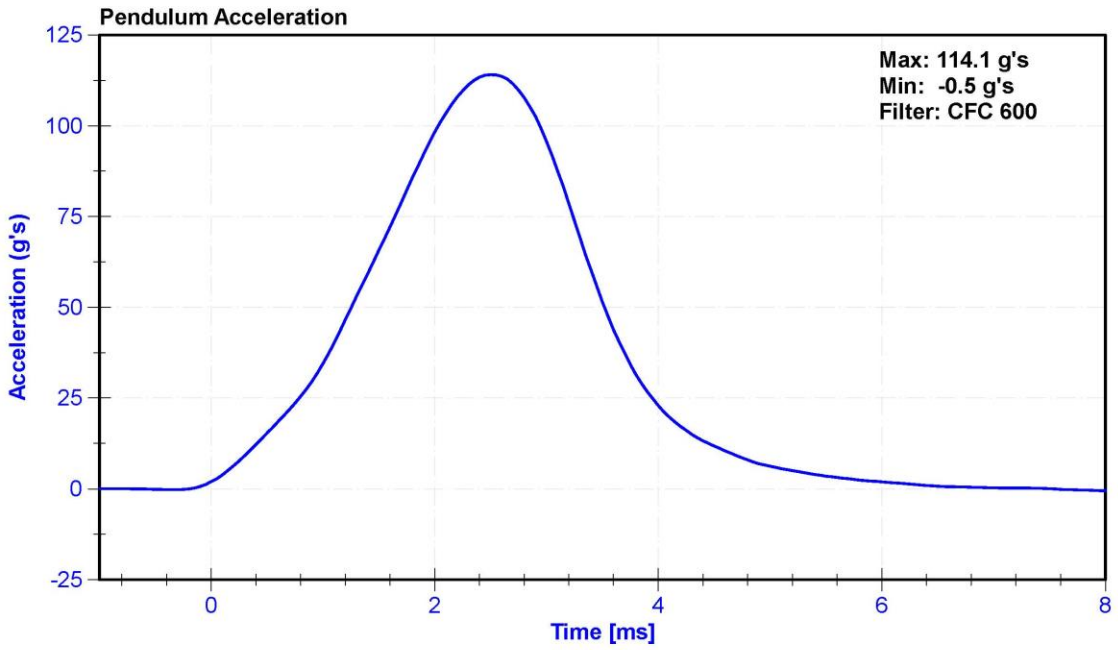

**CALIBRATION TEST RESULTS**

**PRE-TEST**

**HYBRID III 5<sup>TH</sup> PERCENTILE - PASSENGER ATD**

**SERIAL NO: 140**




External Measurements - Hybrid 3 - 5th Female

Technician: K. Brogan

Date: 12/08/2020

Dummy Serial Number: 140

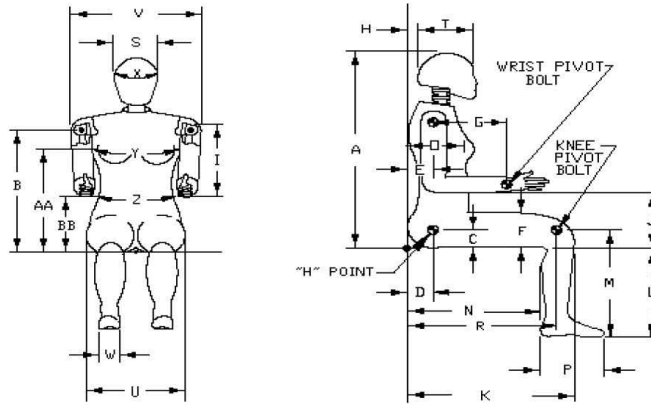

Symbol	Description	Specification (mm)		Result (mm)	Pass/Fail
A	Sitting Height	775	800	790	Pass
B	Shoulder Pivot Height	432	457	442	Pass
C	H-Point Height	81	86	83	Pass
D	H-Point from Backline	145	150	146	Pass
E	Shoulder Pivot from Backline	69	84	78	Pass
F	Thigh Clearance	119	135	126	Pass
G	Back of Elbow to Wrist Pivot	244	259	252	Pass
H	Head Back to Backline	43	48	45	Pass
I	Shoulder to Elbow Length	277	297	290	Pass
J	Elbow Rest Height	183	203	197	Pass
K	Buttock to Knee Length	521	546	540	Pass
L	Popliteal Height	356	376	366	Pass
M	Knee Pivot Height	394	419	410	Pass
N	Buttock Popliteal Length	414	439	428	Pass
O	Chest Depth without Jacket	175	191	182	Pass
P	Foot Length (right)	219	234	229	Pass
R	Buttock To Knee Pivot Length	457	483	465	Pass
S	Head Breadth	137	147	142	Pass
T	Head Depth	178	188	180	Pass
U	Hip Breadth	300	315	313	Pass
V	Shoulder Breadth	351	366	361	Pass
W	Foot Breadth	79	94	83	Pass
X	Head Circumference	528	549	540	Pass
Y	Chest Circumference with Jacket	851	881	874	Pass
Z	Waist Circumference	460	790	624	Pass
AA	Reference Location (Chest Circumference)	333	358	345	Pass
BB	Reference Location (Waist Circumference)	160	170	165	Pass




ATD Manufacturer	Humanetics	Test Technician	D.Reinhard
ATD Serial Number	140	Laboratory Supervisor	K. Brogan




**Results**

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	18.9	25.6	°C	20.7	Pass
Humidity	10	70	%	27	Pass
Resultant Acceleration	250	300	g's	281.3	Pass
Oscillation	0	10	%	1.5	Pass
Lateral Acceleration	-15	15	g's	9.3	Pass

**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
X Accelerometer	Endevco 7264C	P52008	9/22/2020	3/23/2021
Y Accelerometer	Endevco 7264C	P83335	9/22/2020	3/23/2021
Z Accelerometer	Endevco 7264C	T11252	9/22/2020	3/23/2021

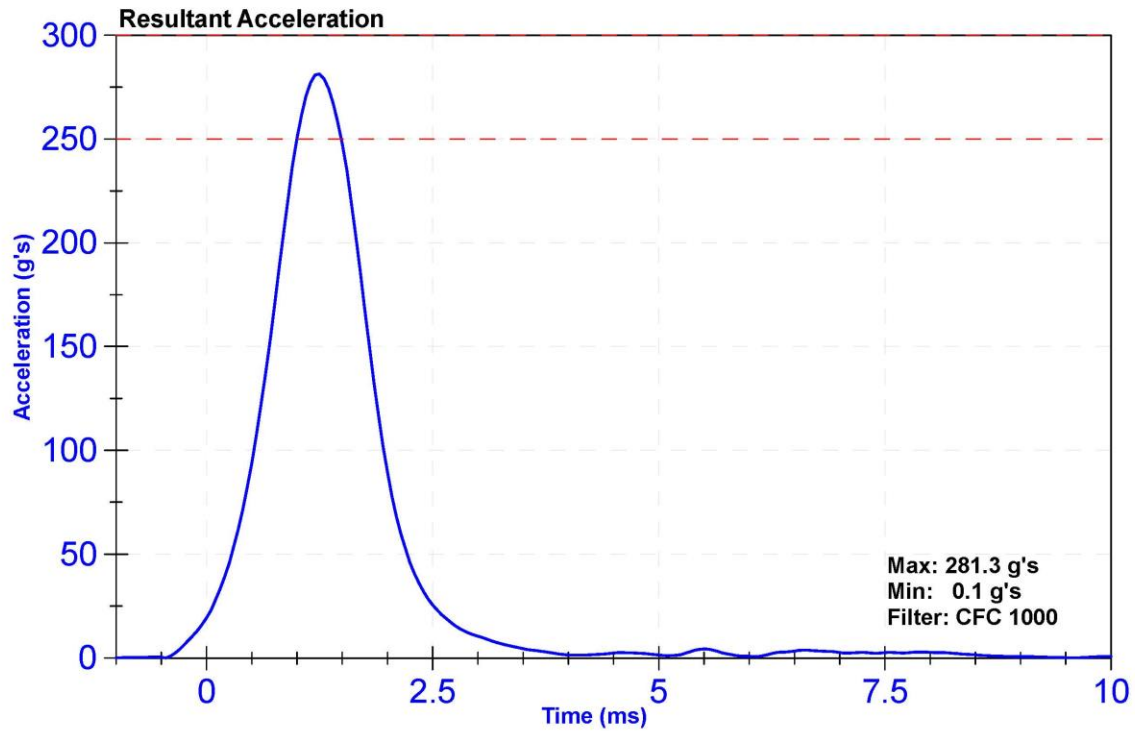

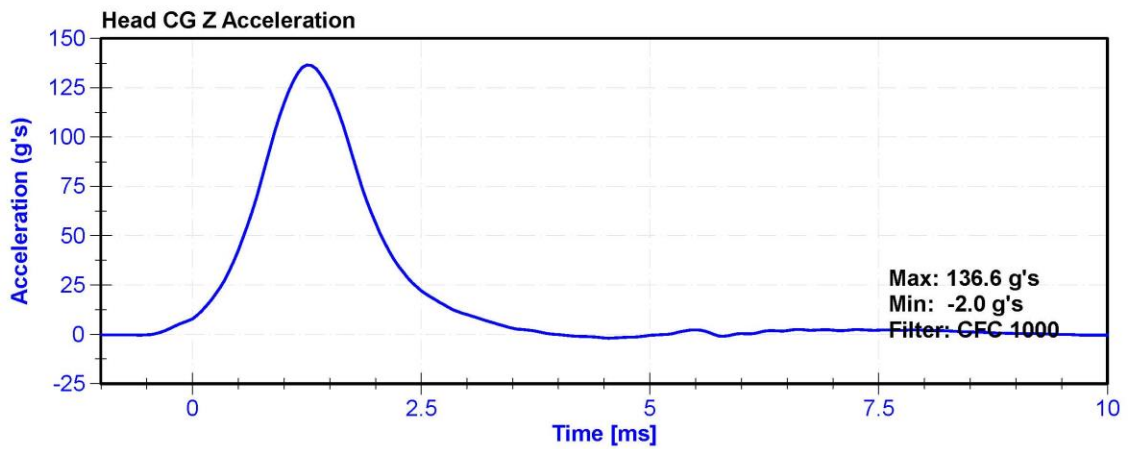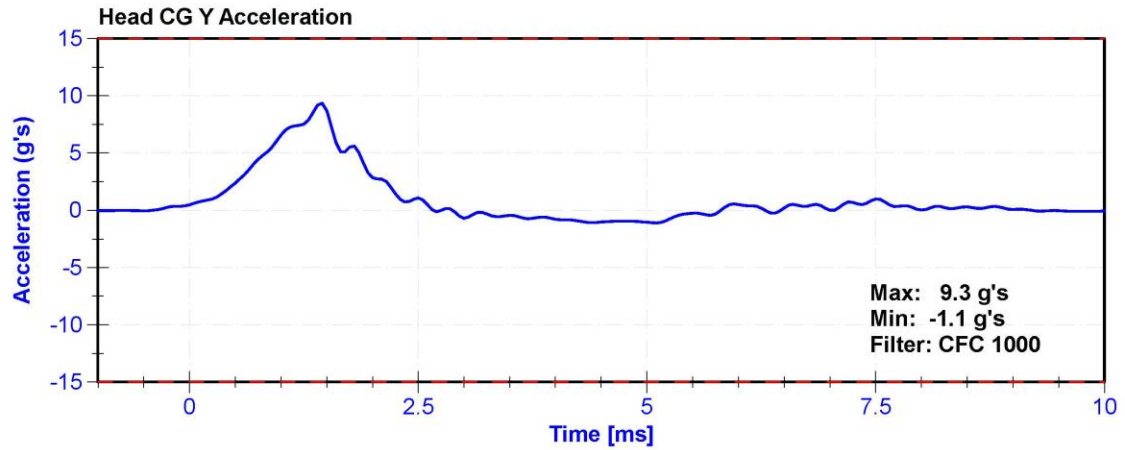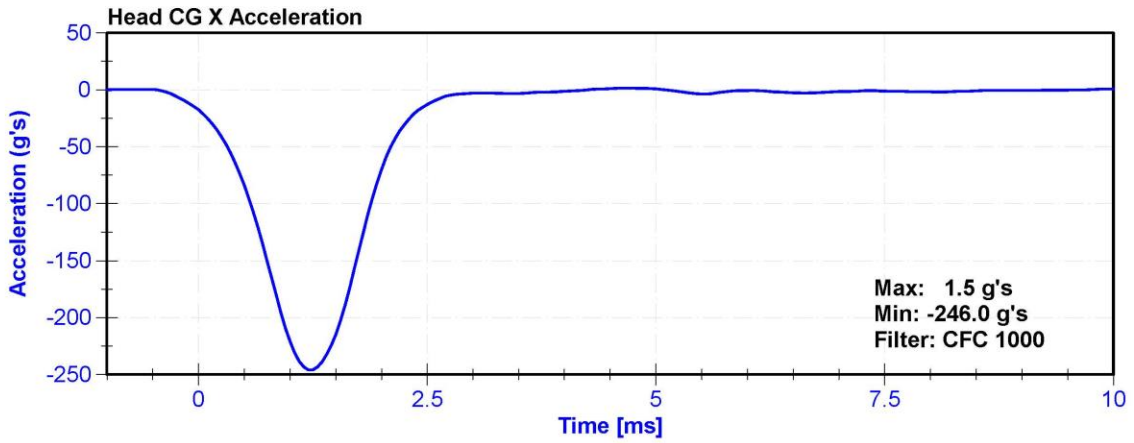


ATD Manufacturer	Humanetics	Test Technician	E. Helenbrook
ATD Serial Number	140	Laboratory Supervisor	K. Brogan



**Results**




Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21.2	Pass
Humidity	10	70	%	22.2	Pass
Velocity	6.89	7.13	m/s	6.958	Pass
Pendulum Impulse at 10ms	2.1	2.5	m/s	2.34	Pass
Pendulum Impulse at 20ms	4.0	5.0	m/s	4.77	Pass
Pendulum Impulse at 30ms	5.8	7.0	m/s	6.97	Pass
Max D Plane Rotation	77	91	deg	79.9	Pass
Max Moment During Rotation Interval	69	83	Nm	79.3	Pass
Moment Decay to 10.0 Nm	80	100	ms	85.6	Pass

**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	ENDEVCO 7231CT	AC-C16503 Striker	2/6/2020	2/5/2021
Pendulum Potentiometer	ETI SP22G	DS-LABPOT1	9/17/2020	9/17/2021
Condyle Potentiometer	ETI SP22G	DS-LABPOT2	9/17/2020	9/17/2021
Upper Neck Load Cell	Denton 1716A	LC-1916Fx	11/23/2020	11/23/2021

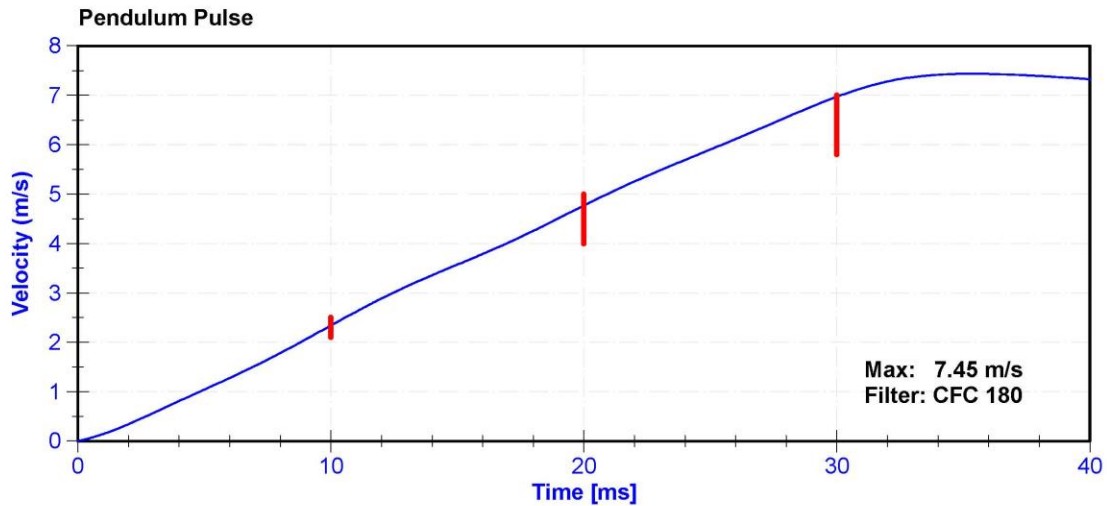

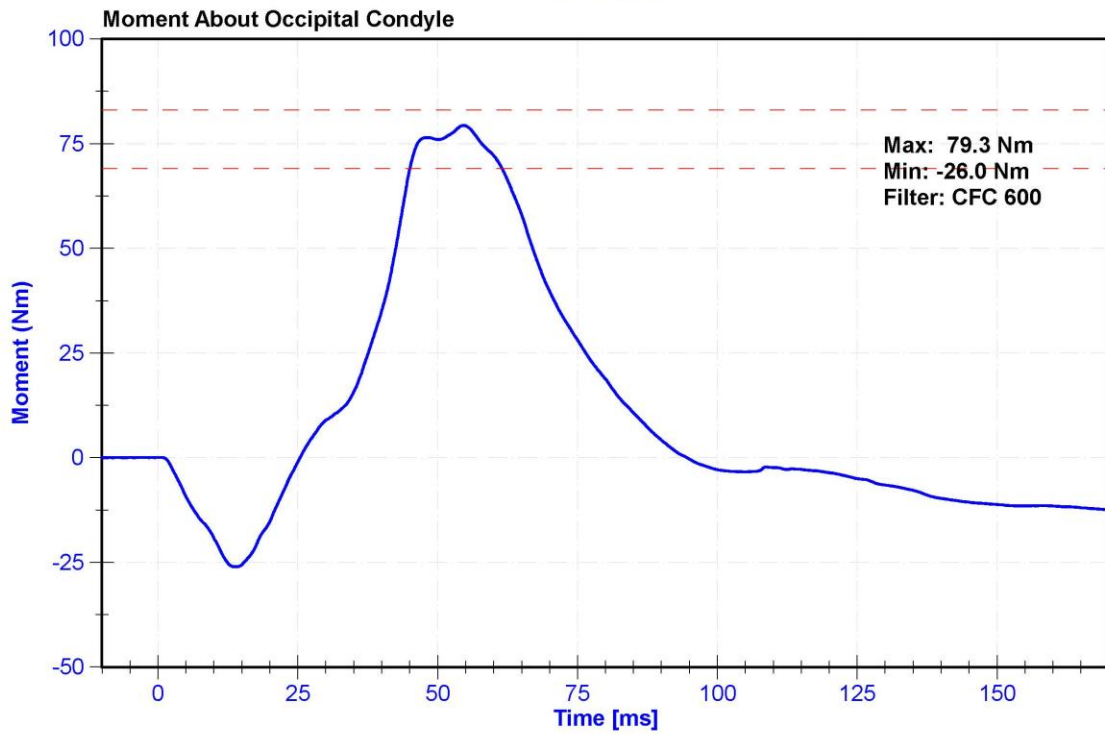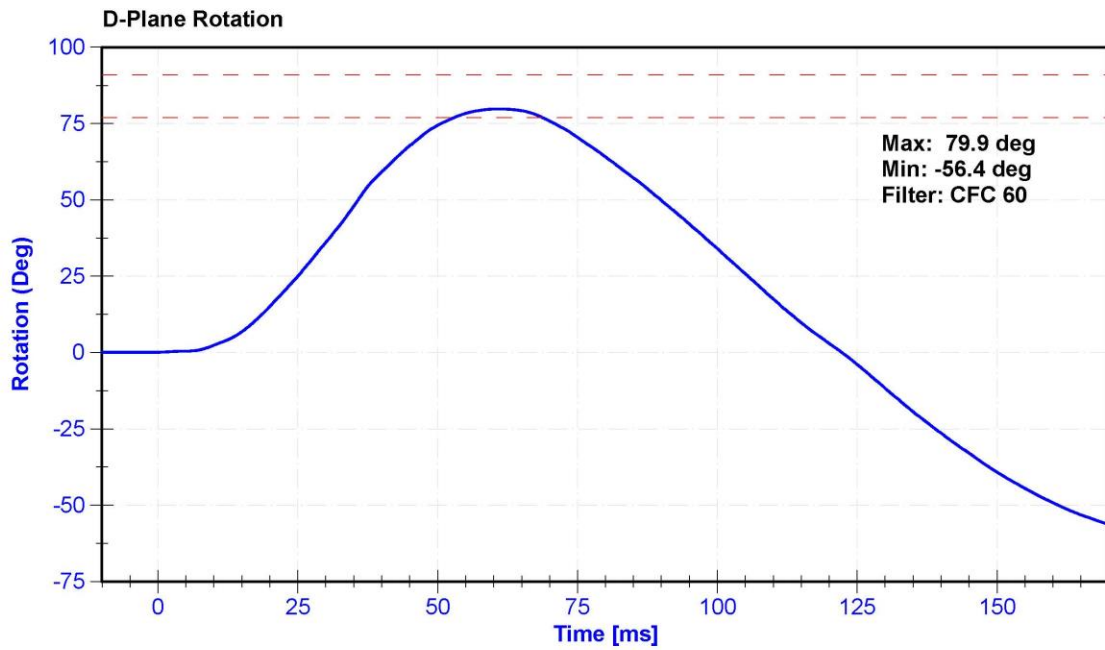

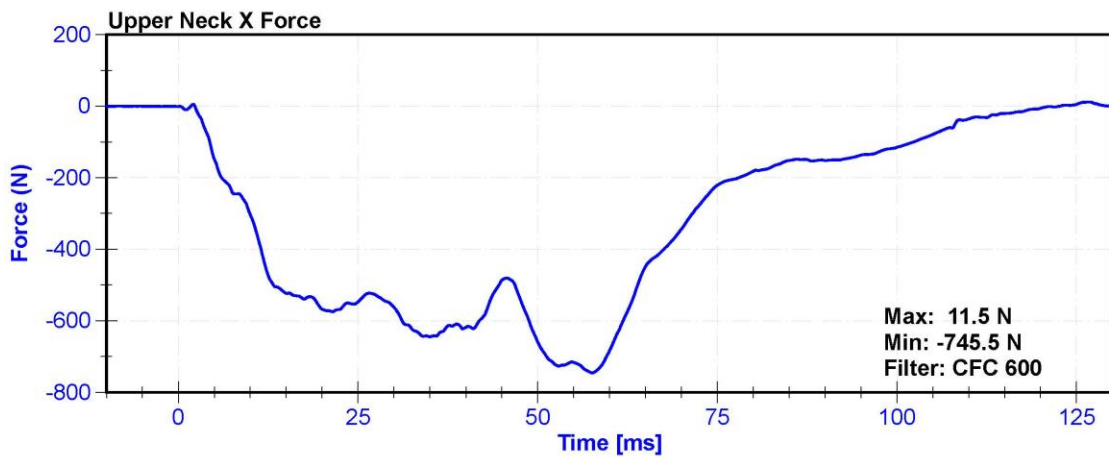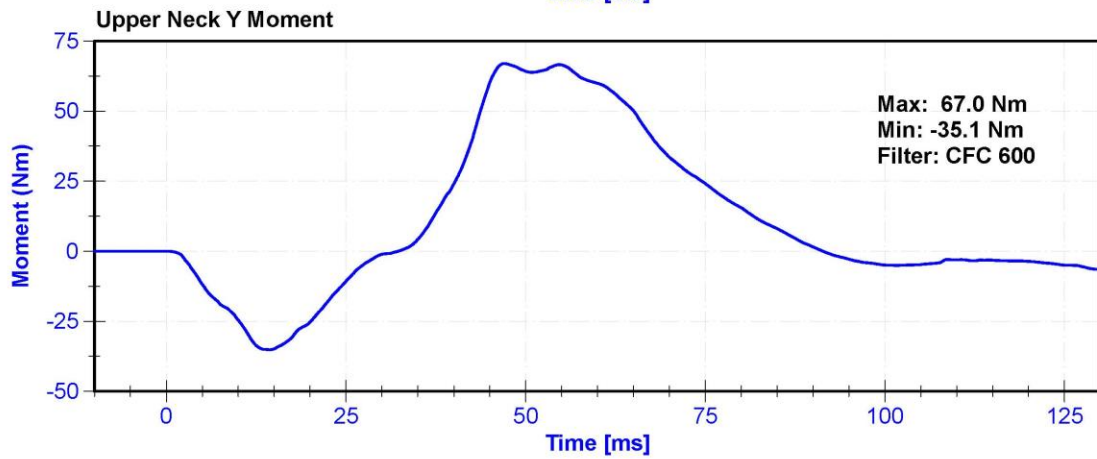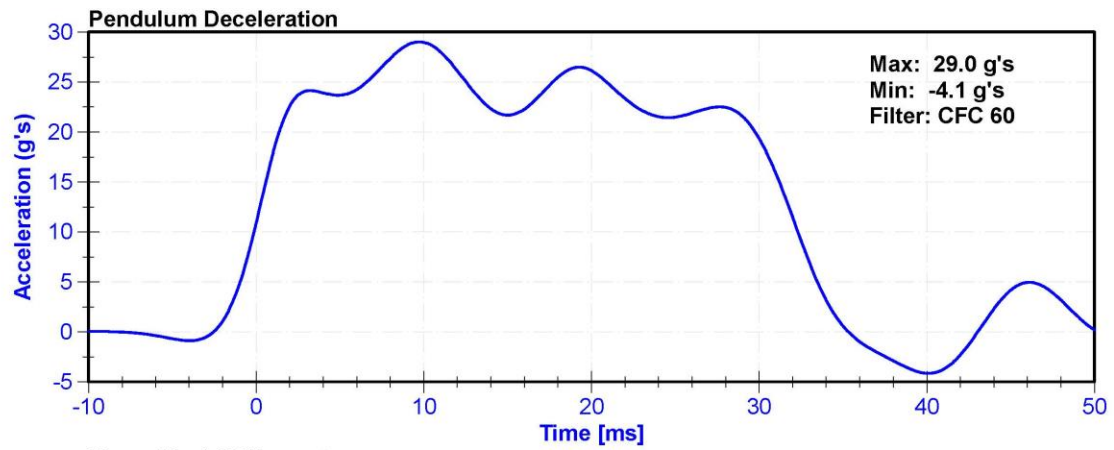


ATD Manufacturer	Humanetics	Test Technician	E. Helenbrook
ATD Serial Number	140	Laboratory Supervisor	K. Brogan



**Results**




Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21.2	Pass
Humidity	10	70	%	22.3	Pass
Velocity	5.95	6.19	m/s	6.046	Pass
Pendulum Impulse at 10ms	1.5	1.9	m/s	1.61	Pass
Pendulum Impulse at 20ms	3.1	3.9	m/s	3.34	Pass
Pendulum Impulse at 30ms	4.6	5.6	m/s	4.99	Pass
D Plane Rotation	99	114	deg	103.0	Pass
Moment During Rotation Interval	-65	-53	Nm	-58.8	Pass
Moment Decay to -10Nm	94	114	ms	105.3	Pass

**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	ENDEVCO 7231CT	AC-C16503 Striker	2/6/2020	2/5/2021
Pendulum Potentiometer	ETI SP22G	DS-LABPOT1	9/17/2020	9/17/2021
Condyle Potentiometer	ETI SP22G	DS-LABPOT2	9/17/2020	9/17/2021
Upper Neck Load Cell	Denton 1716A	LC-1916Fx	11/23/2020	11/23/2021

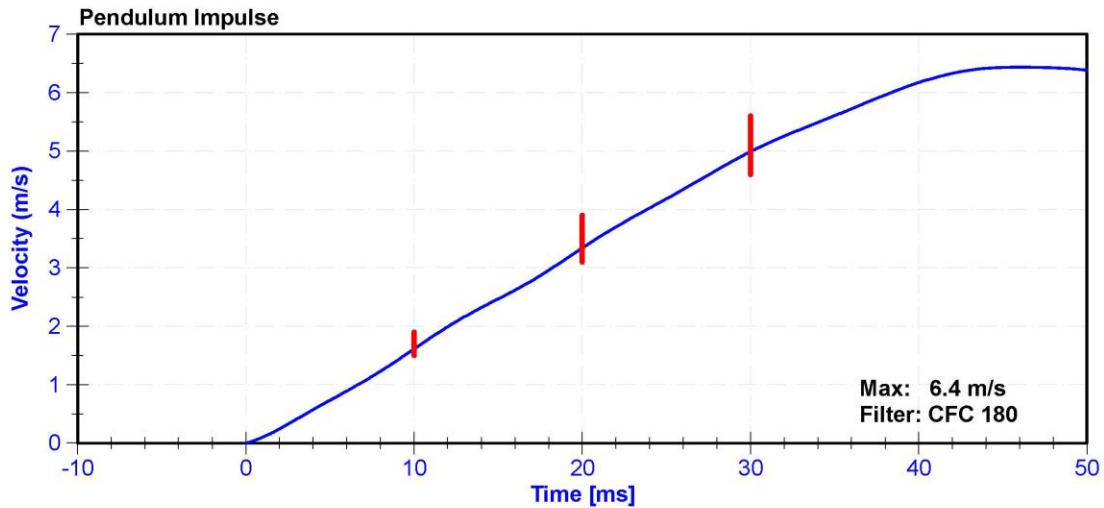

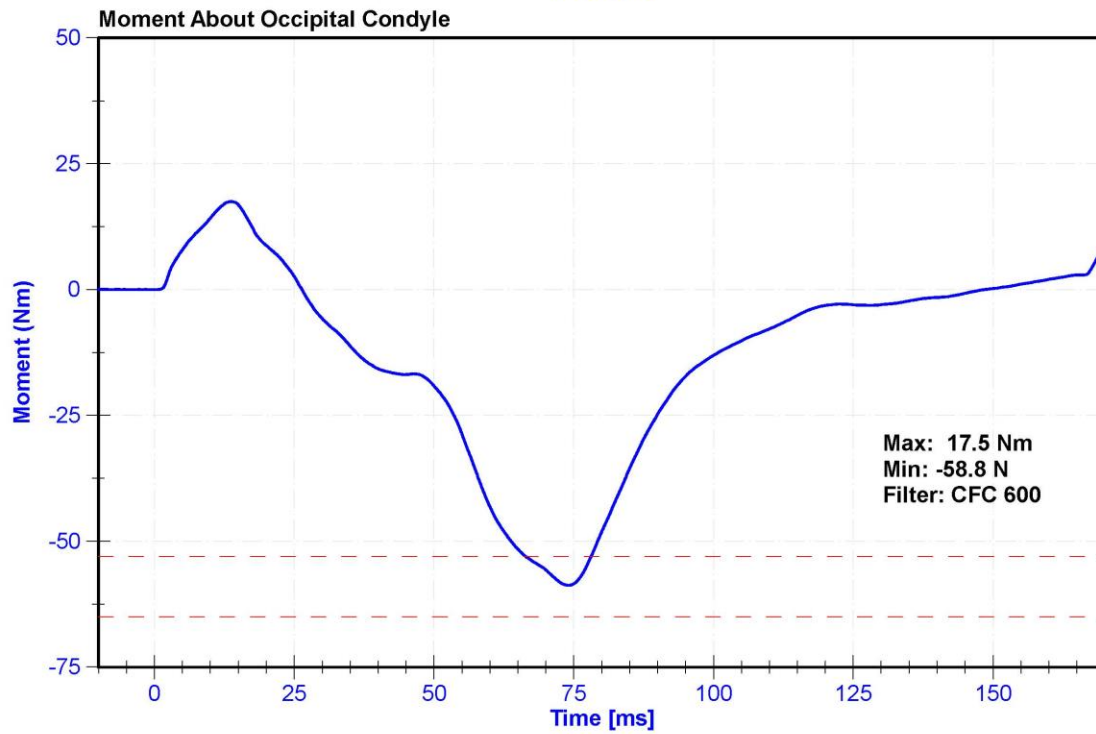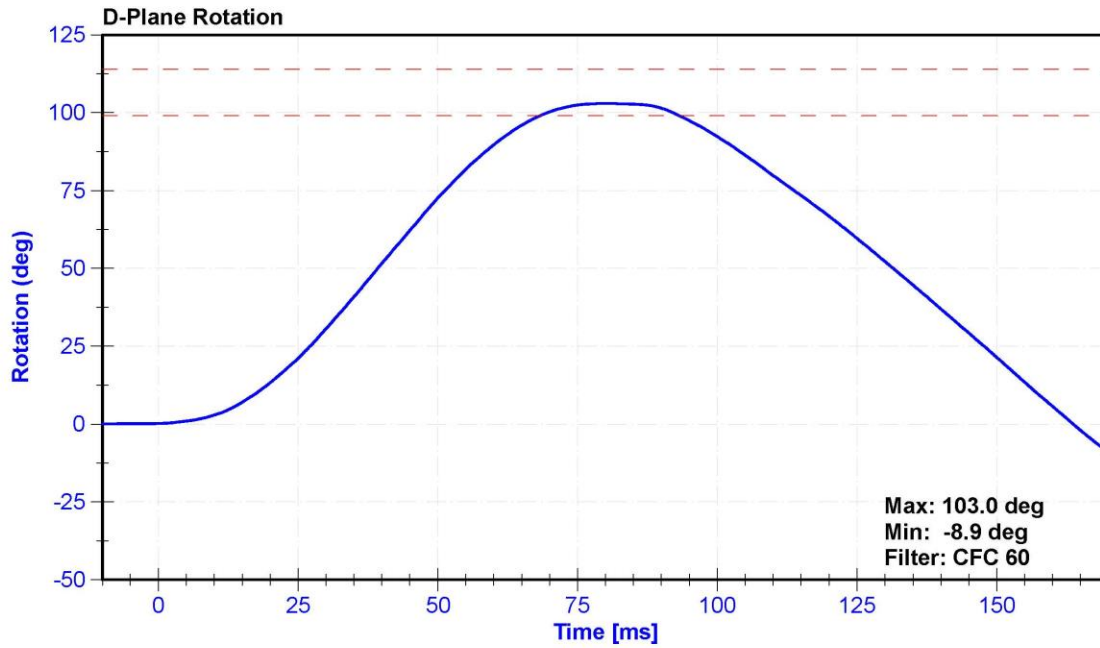

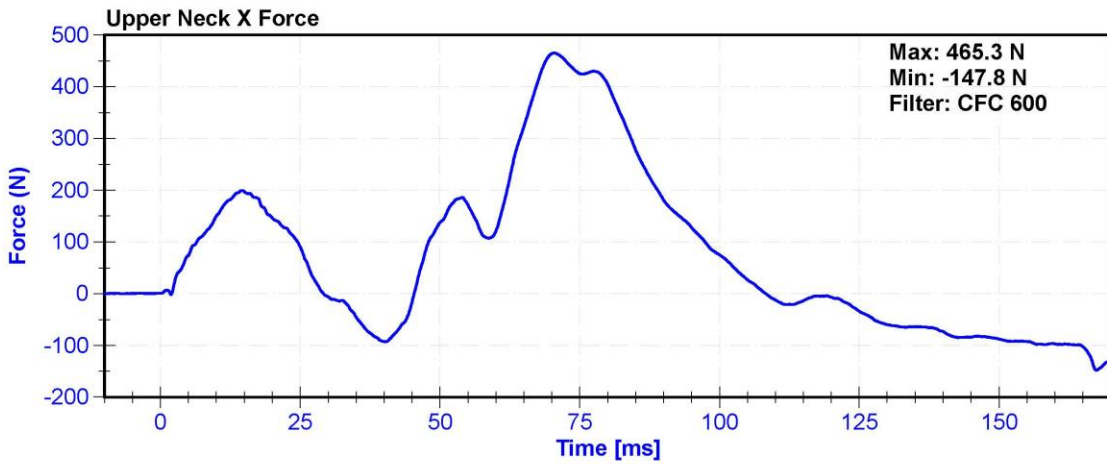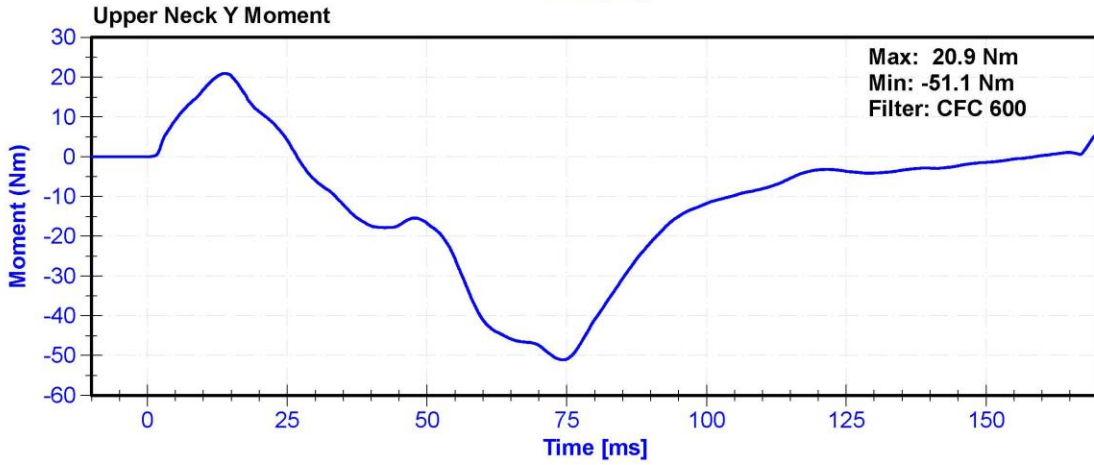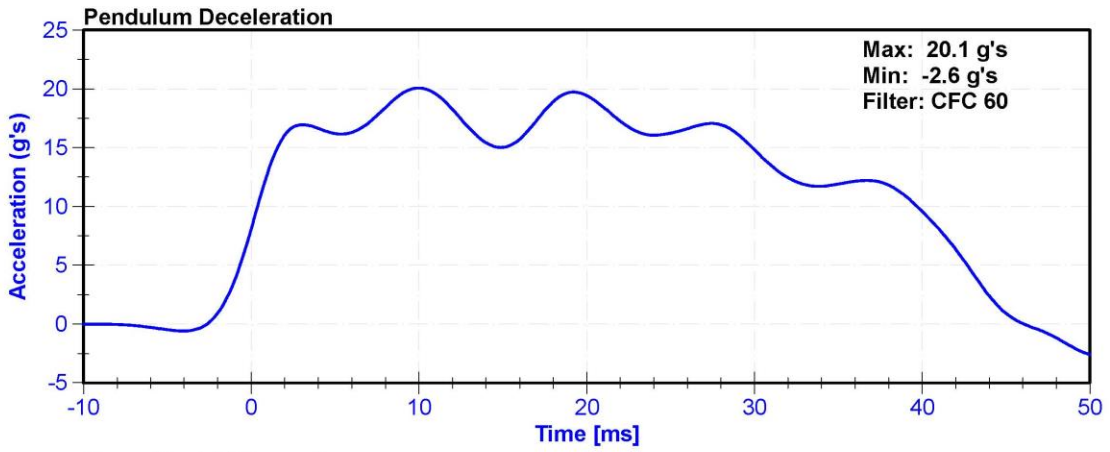




ATD Manufacturer	Humanetics	Test Technician	K. Dutton
ATD Serial Number	140	Laboratory Supervisor	K. Brogan



**Results**



Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	20.9	Pass
Humidity	10	70	%	32.3	Pass
Velocity	6.59	6.83	m/s	6.699	Pass
Chest Deflection	-58	-50	mm	-50.1	Pass
Maximum Resistive Force (50 to 58mm)	3900	4400	N	4153.8	Pass
Maximum Resistive Force (18 to 50mm)	0	4600	N	4372.4	Pass
Hysteresis	69	85	%	74.9	Pass

**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	MSI 64C-2000	A279031	5/8/2020	5/8/2021
Chest Potentiometer	SERVO 14CBI-3615	DS-140GFE	11/17/2020	5/18/2021

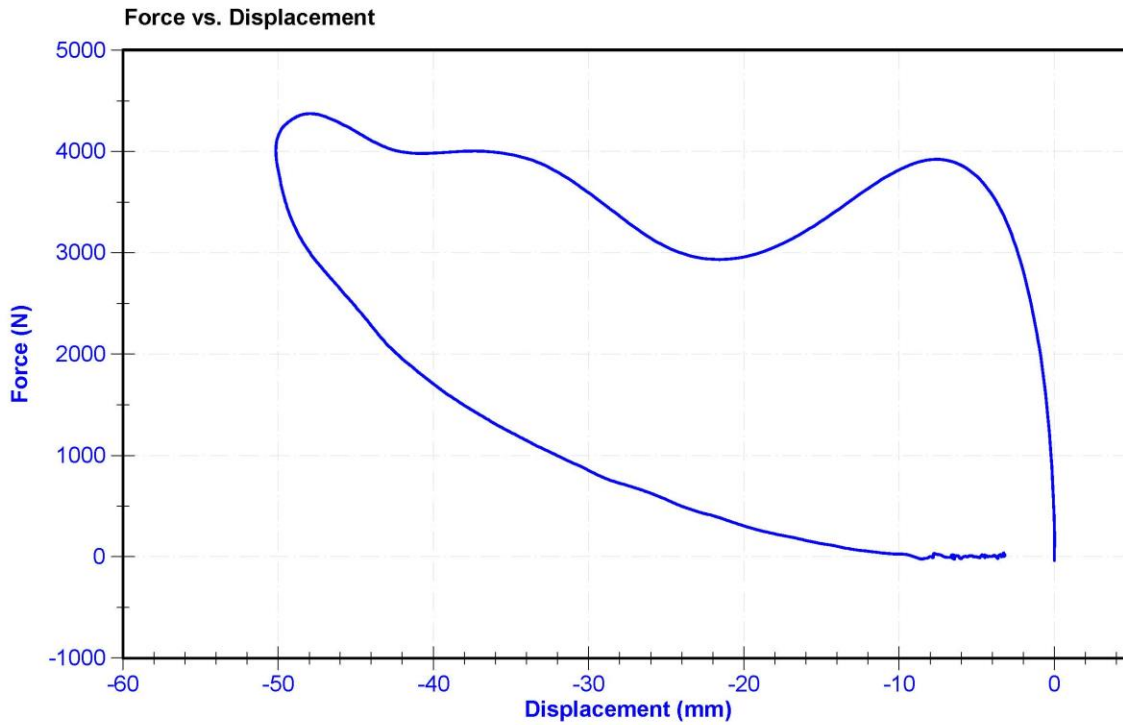

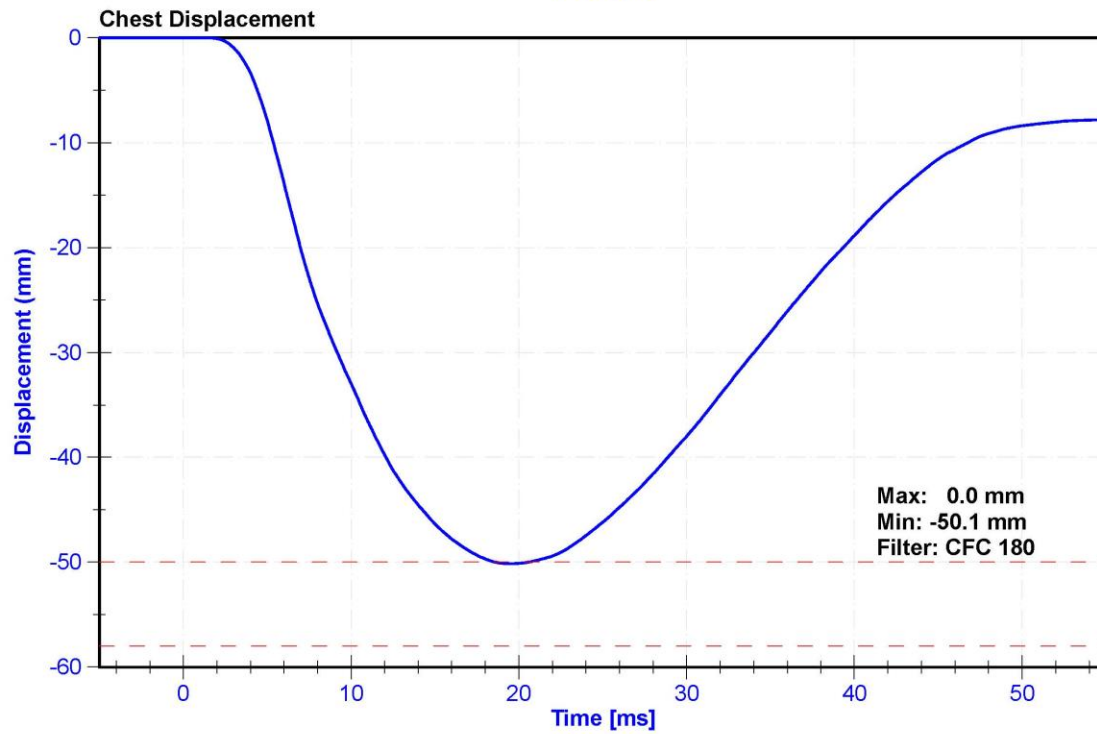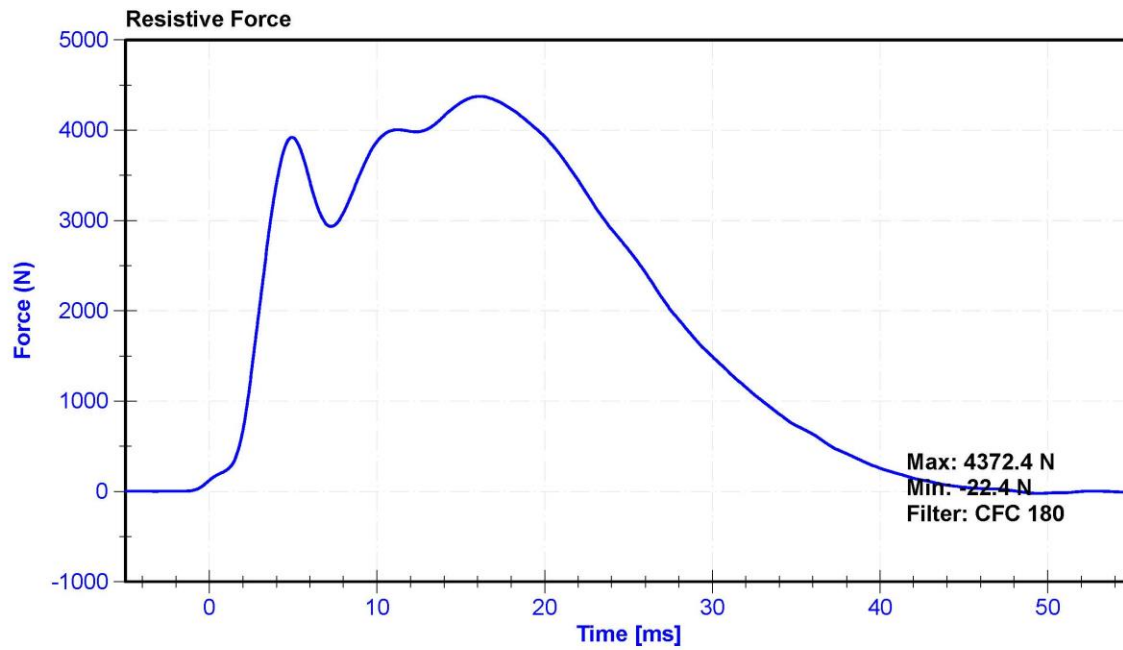

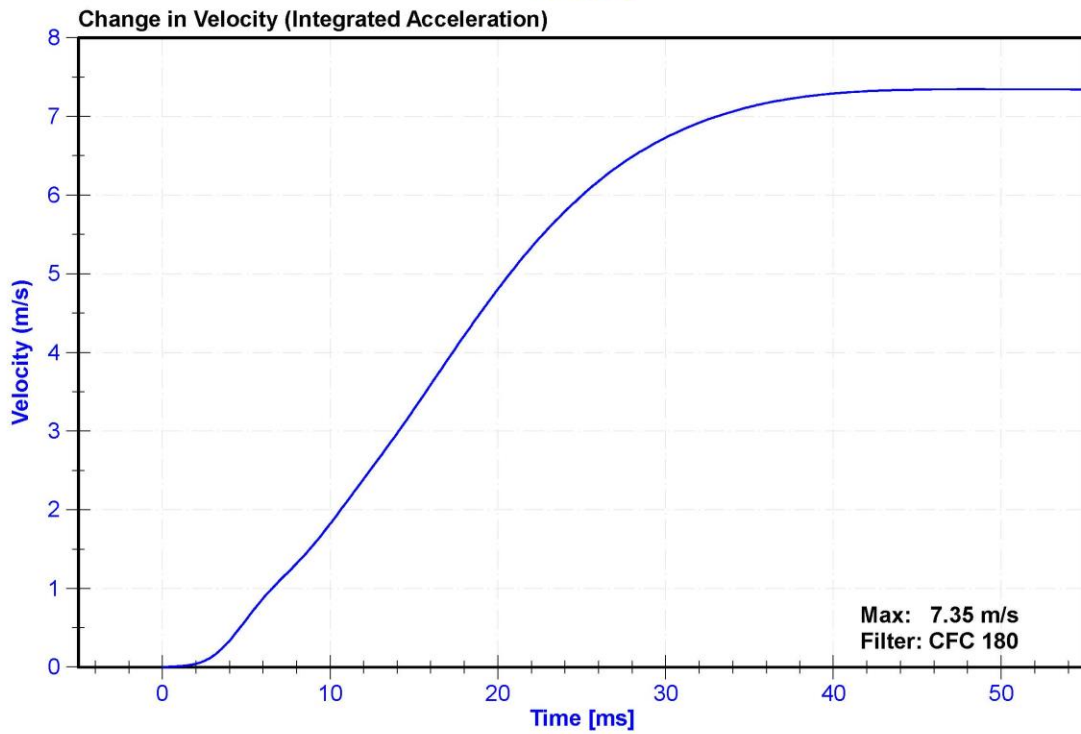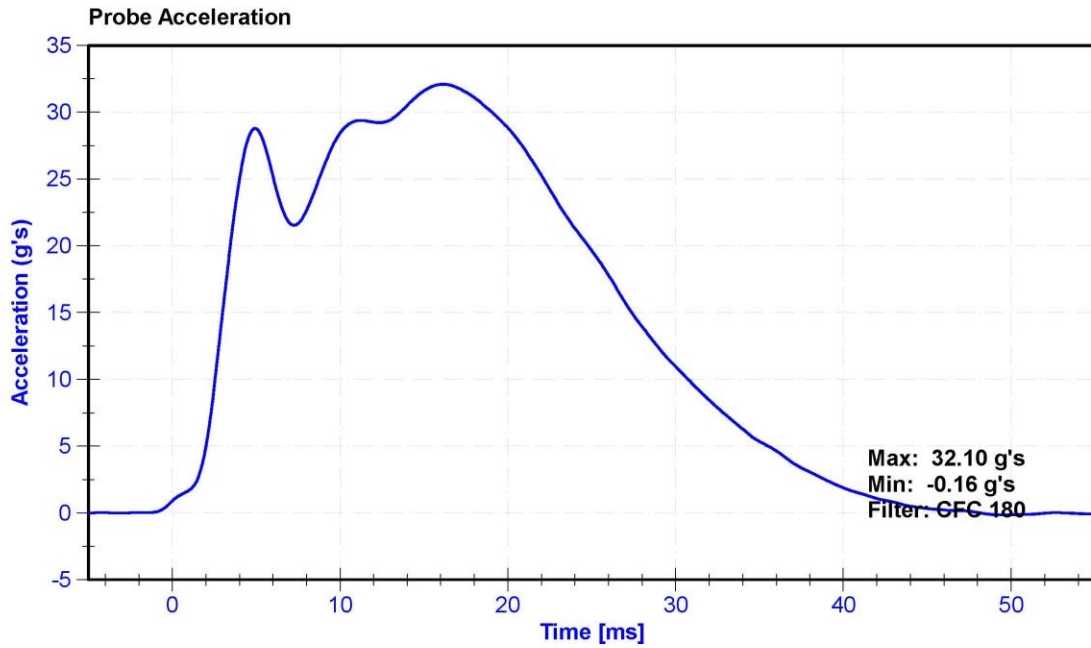


ATD Manufacturer	Humanetics	Test Technician	D. Reinhard
ATD Serial Number	140	Laboratory Supervisor	K. Brogan

**Results**

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	18.6	25.6	°C	21.7	Pass
Humidity	10	70	%	32.1	Pass
Initial Angle	0	20	deg	15.9	Pass
Force at 45 Degrees	320	390	N	352.3	Pass
Return Angle Relative to Initial	0	8	deg	4.6	Pass

**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Potentiometer	Seika.de N4C-1	DS-13051548	12/10/2019	12/9/2020
Load Cell	Interface SML-200	LC-493319	10/8/2020	10/8/2021

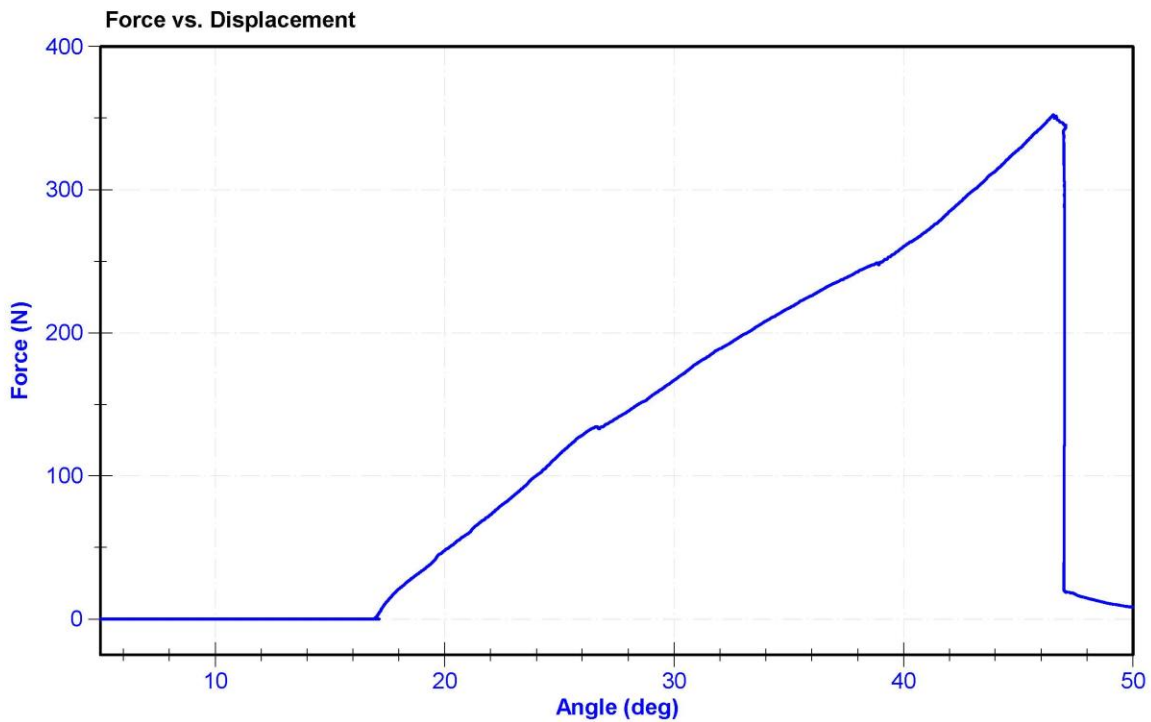


ATD Manufacturer	Humanetics	Test Technician	K. Dutton
ATD Serial Number	140	Laboratory Supervisor	K. Brogan



**Results**

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	18.9	25.6	°C	21.2	Pass
Humidity	10	70	%	25.2	Pass
Velocity	2.07	2.13	m/s	2.108	Pass
Resistive Force	3450	4060	N	3975.9	Pass

**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	MSI 64C-2000	A279031	5/8/2020	5/8/2021

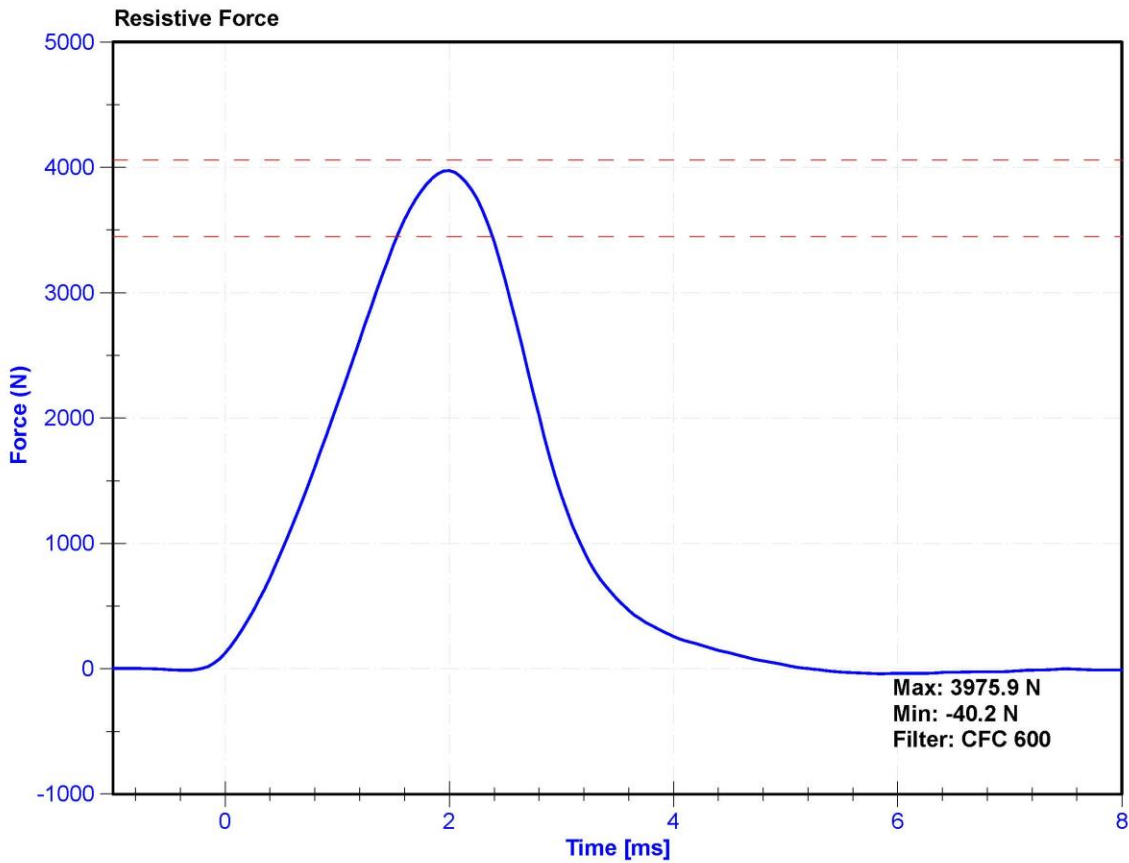

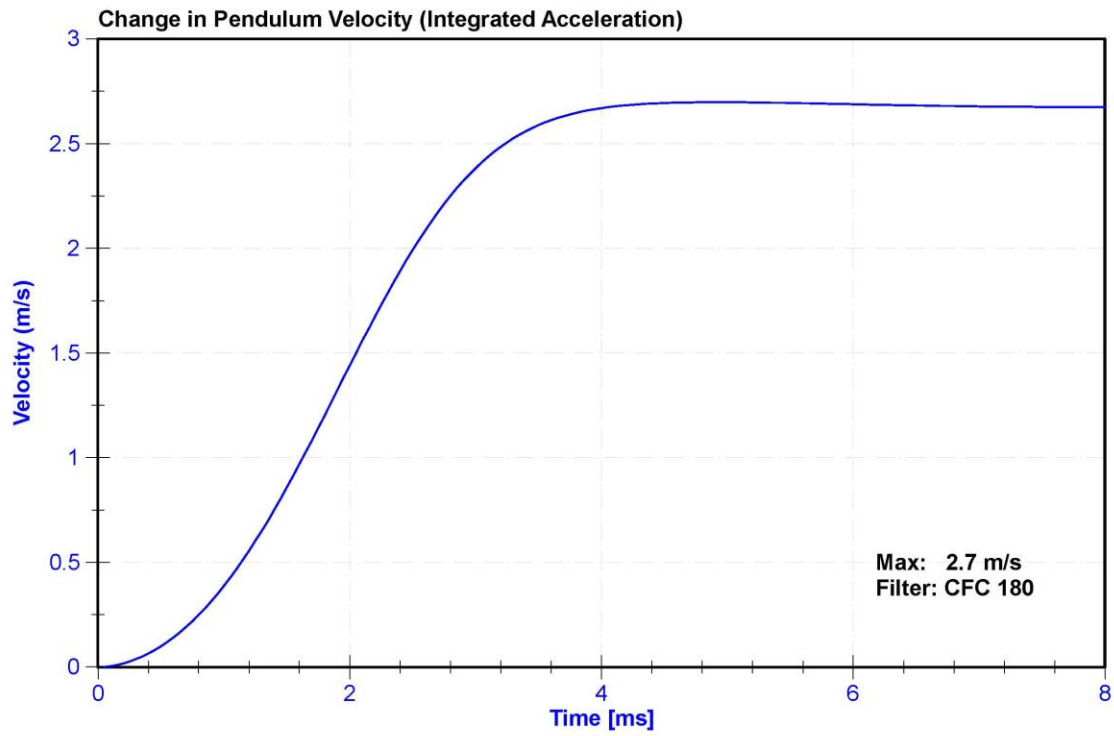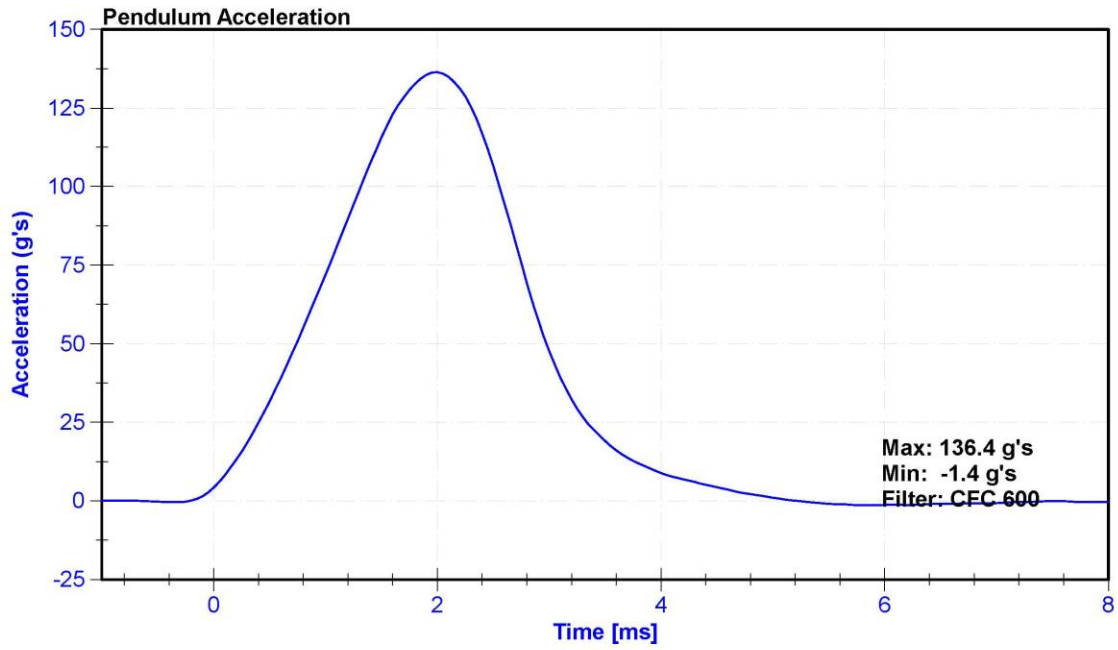


ATD Manufacturer	Humanetics	Test Technician	K. Dutton
ATD Serial Number	140	Laboratory Supervisor	K. Brogan



**Results**

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	18.9	25.6	°C	21.2	Pass
Humidity	10	70	%	25.2	Pass
Velocity	2.07	2.13	m/s	2.115	Pass
Resistive Force	3450	4060	N	3792.5	Pass

**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	MSI 64C-2000	A279031	5/8/2020	5/8/2021

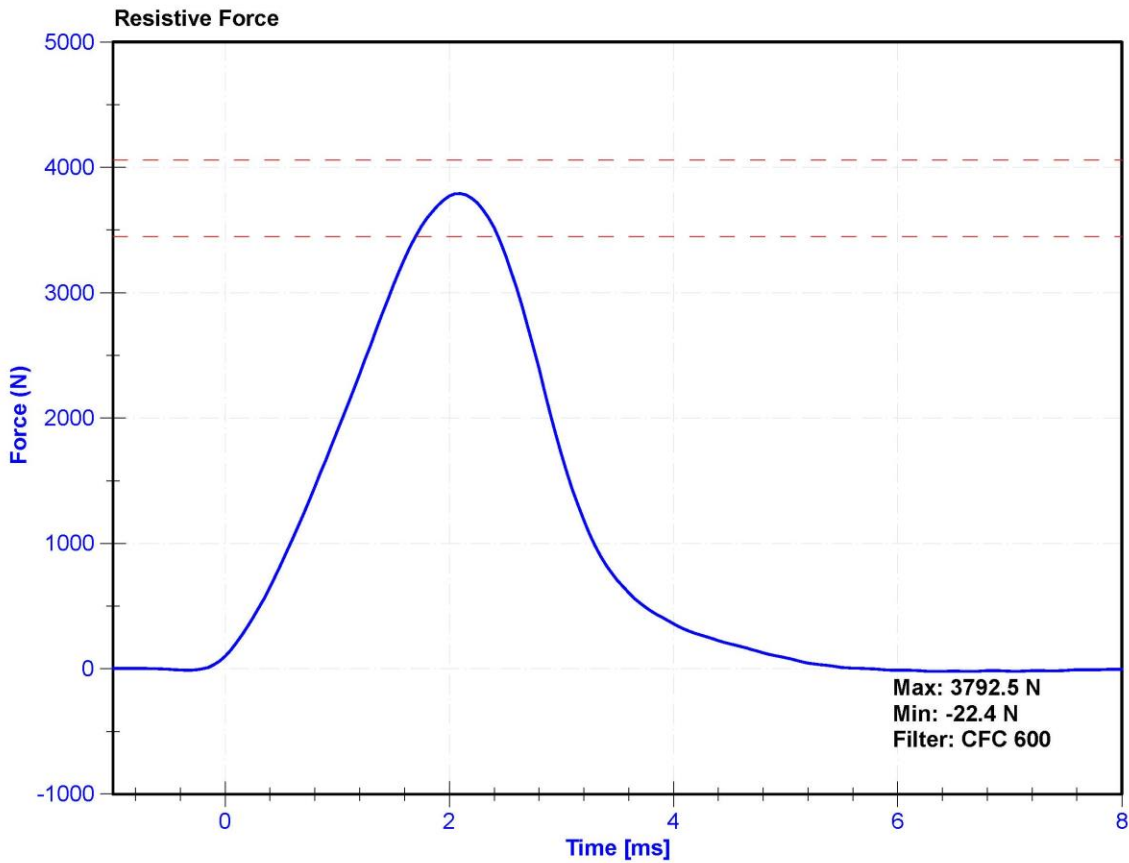

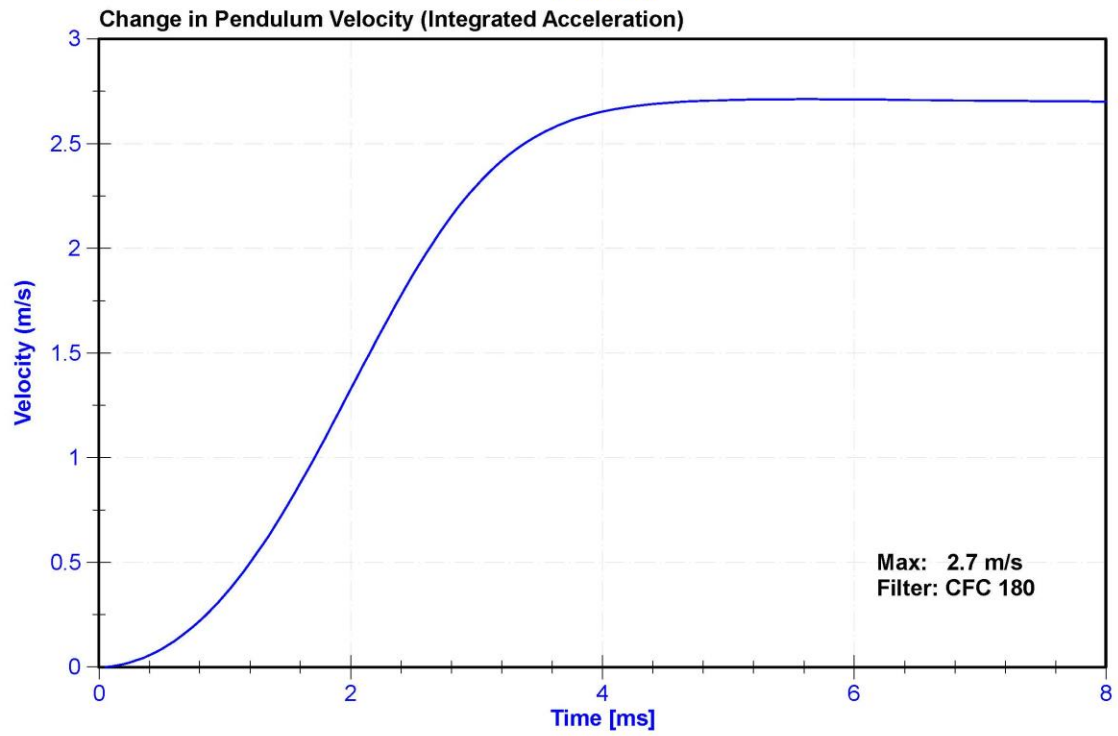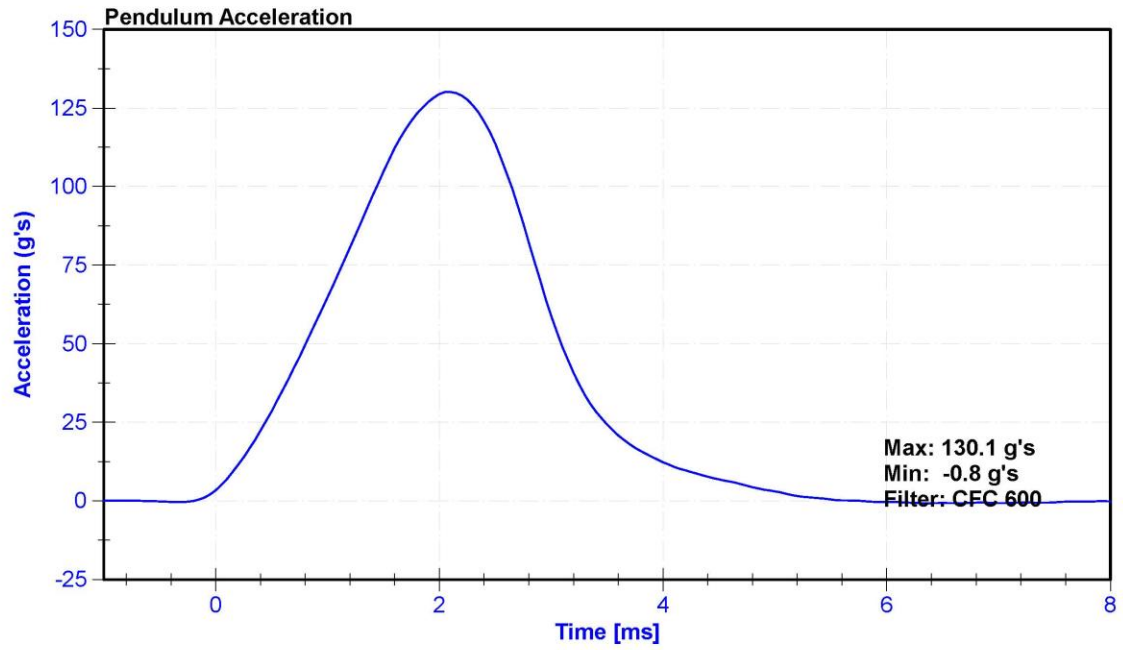



**CALIBRATION TEST RESULTS**

**POST-TEST**

**HYBRID III 50<sup>TH</sup> PERCENTILE MALE - DRIVER ATD**

**SERIAL NO: 142**




External Measurements - Hybrid 3 - 50th Male

Technician: K. Dutton

Date: 01/05/2021

Dummy Serial Number: 142

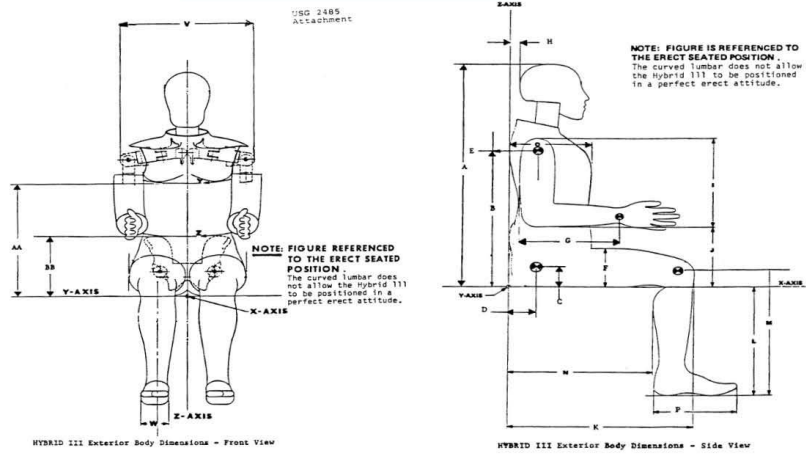

Symbol	Description	Specification (in)		Result (in)	Pass/Fail
A	Sitting Height	34.6	35.0	34.7	Pass
B	Shoulder Pivot Height	19.9	20.5	20.3	Pass
C	H-Point Height	3.3	3.5	3.4	Pass
D	H-Point from Backline	5.3	5.5	5.4	Pass
E	Shoulder Pivot from Backline	3.3	3.7	3.5	Pass
F	Thigh Clearance	5.5	6.1	5.9	Pass
G	Back of Elbow to Wrist Pivot	11.4	12.0	11.7	Pass
H	Head Back to Backline	1.6	1.8	1.7	Pass
I	Shoulder to Elbow Length	13.0	13.6	13.4	Pass
J	Elbow Rest Height	7.5	8.3	8.1	Pass
K	Buttock to Knee Length	22.8	23.8	23.0	Pass
L	Popliteal Height	16.9	17.9	17.5	Pass
M	Knee Pivot Height	19.1	19.7	19.5	Pass
N	Buttock Popliteal Length	17.8	18.8	18.3	Pass
O	Chest Depth without Jacket	8.4	9.0	8.6	Pass
P	Foot Length (right)	9.9	10.5	10.1	Pass
V	Shoulder Breadth	16.3	17.2	16.8	Pass
W	Foot Breadth	3.6	4.2	3.8	Pass
Y	Chest Circumference with Jacket	38.2	39.4	38.8	Pass
Z	Waist Circumference	32.9	34.1	33.7	Pass
AA	Reference Location (Chest Circumference)	16.9	17.1	17.0	Pass
BB	Reference Location (Waist Circumference)	8.9	9.1	9.0	Pass


ATD Manufacturer	Humanetics	Test Technician	E. Helenbrook
ATD Serial Number	142	Laboratory Supervisor	K. Brogan




**Results**

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	18.9	25.6	°C	21.5	Pass
Humidity	10	70	%	23.2	Pass
Resultant Acceleration	225	275	g's	257.2	Pass
Oscillation	0	10	%	2.4	Pass
Lateral Acceleration	-15	15	g's	-7.3	Pass

**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
X Accelerometer	ENDEVCO 7264	P51681	11/3/2020	5/4/2021
Y Accelerometer	ENDEVCO 7264	P64151	11/3/2020	5/4/2021
Z Accelerometer	ENDEVCO 7264	P52114	11/3/2020	5/4/2021

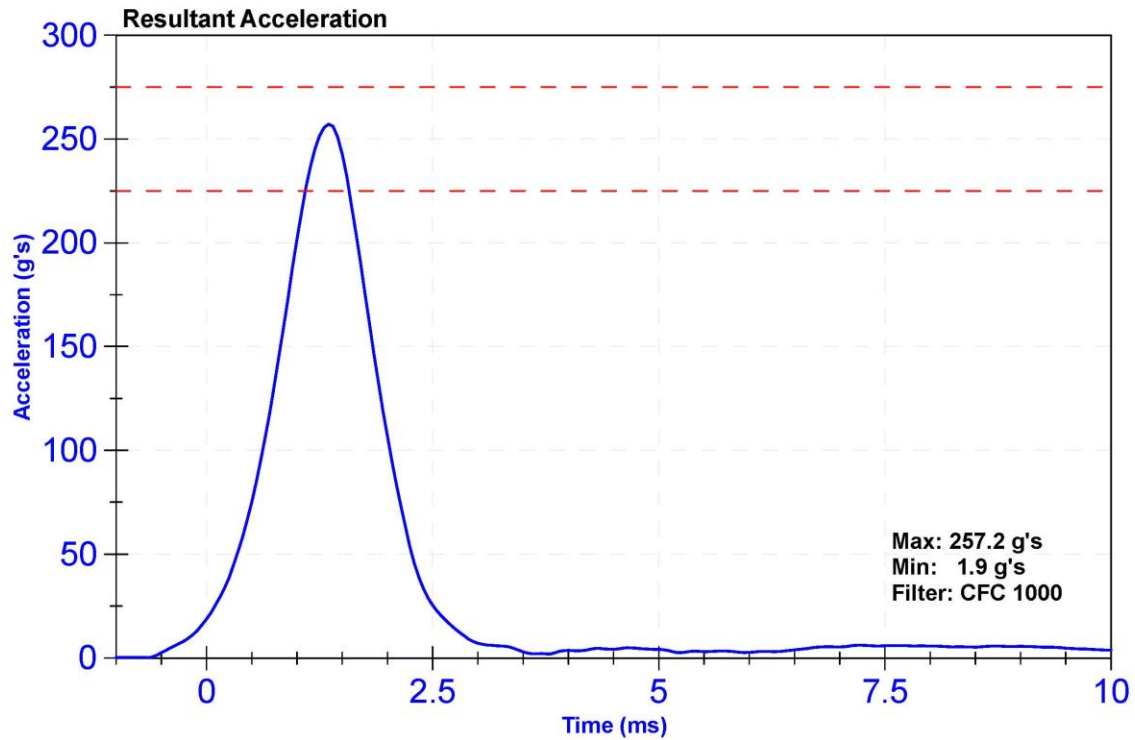

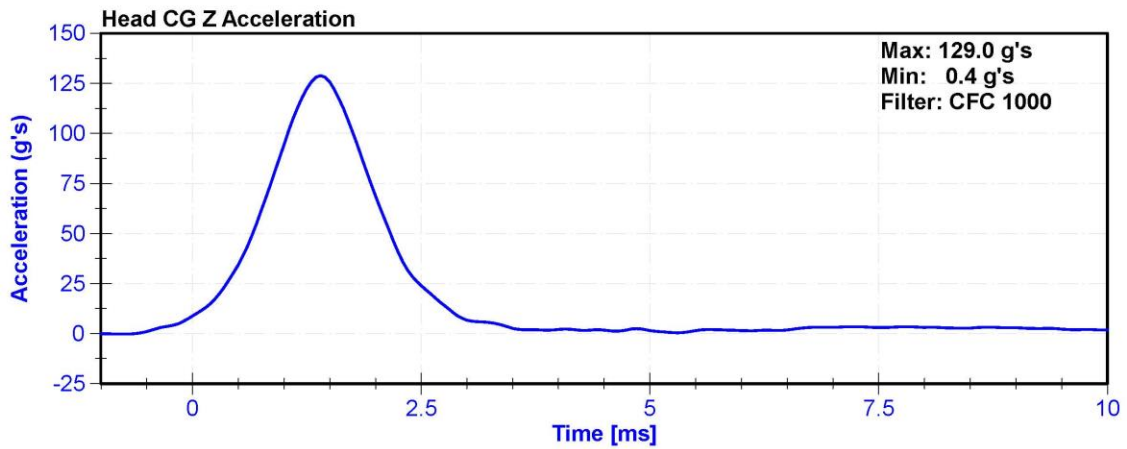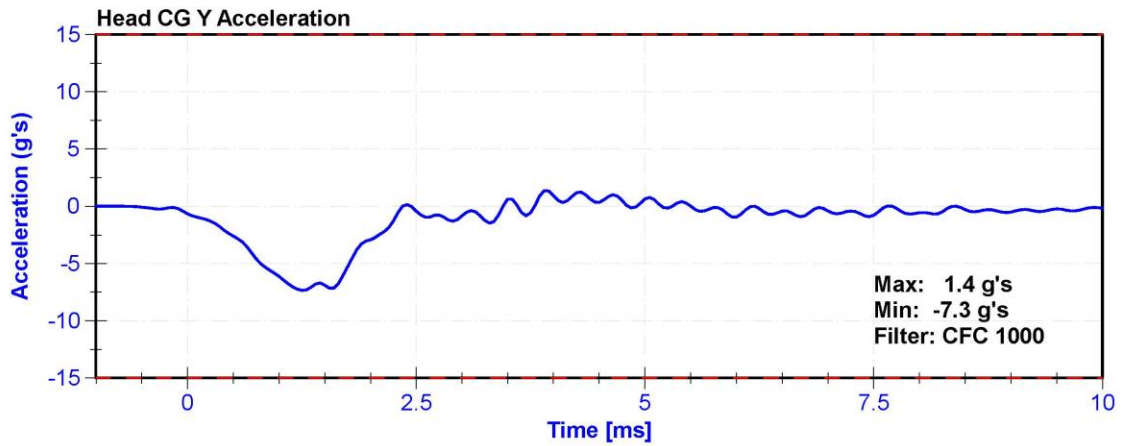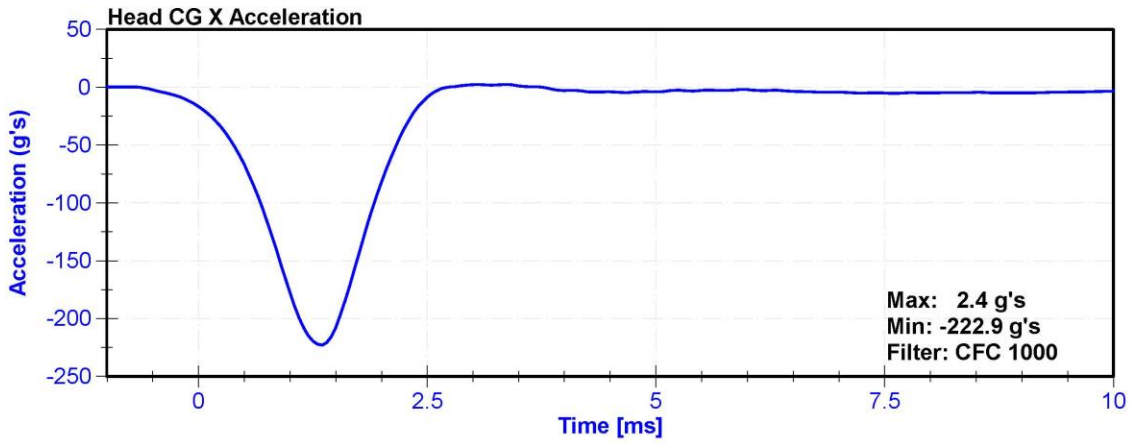



ATD Manufacturer	Humanetics	Test Technician	S. Vacanti
ATD Serial Number	142	Laboratory Supervisor	K. Brogan




**Results**

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21.5	Pass
Humidity	10	70	%	34.0	Pass
Velocity	6.89	7.13	m/s	6.958	Pass
Pendulum Deceleration at 10ms	22.5	27.5	g's	24.32	Pass
Pendulum Deceleration at 20ms	17.6	22.6	g's	20.73	Pass
Pendulum Deceleration at 30ms	12.5	18.5	g's	14.46	Pass
Max. Pendulum Deceleration After 30ms	0	29	g's	24.3	Pass
Pendulum Deceleration Time to 5 g's	34	42	ms	41.6	Pass
Maximum D Plane Rotation	64	78	deg	71.3	Pass
Time to Maximum Rotation	57	64	ms	63.8	Pass
Rotation Decay to Zero	113	127	ms	118.6	Pass
Moment About Occipital Condyle	88.1	108.4	Nm	96.01	Pass
Time to Maximum Moment	47	58	ms	54.5	Pass
Moment Decay to Zero	97	107	ms	104.7	Pass

**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	ENDEVCO 7231CT	AC-C16503 Striker	2/6/2020	2/5/2021
Pendulum Potentiometer	ETI SP22G	DS-LABPOT1	9/17/2020	9/17/2021
Condyle Potentiometer	ETI SP22G	DS-LABPOT2	9/17/2020	9/17/2021
Upper Neck Load Cell	DENTON 1716A	LC-2186Fx	11/10/2020	11/10/2021

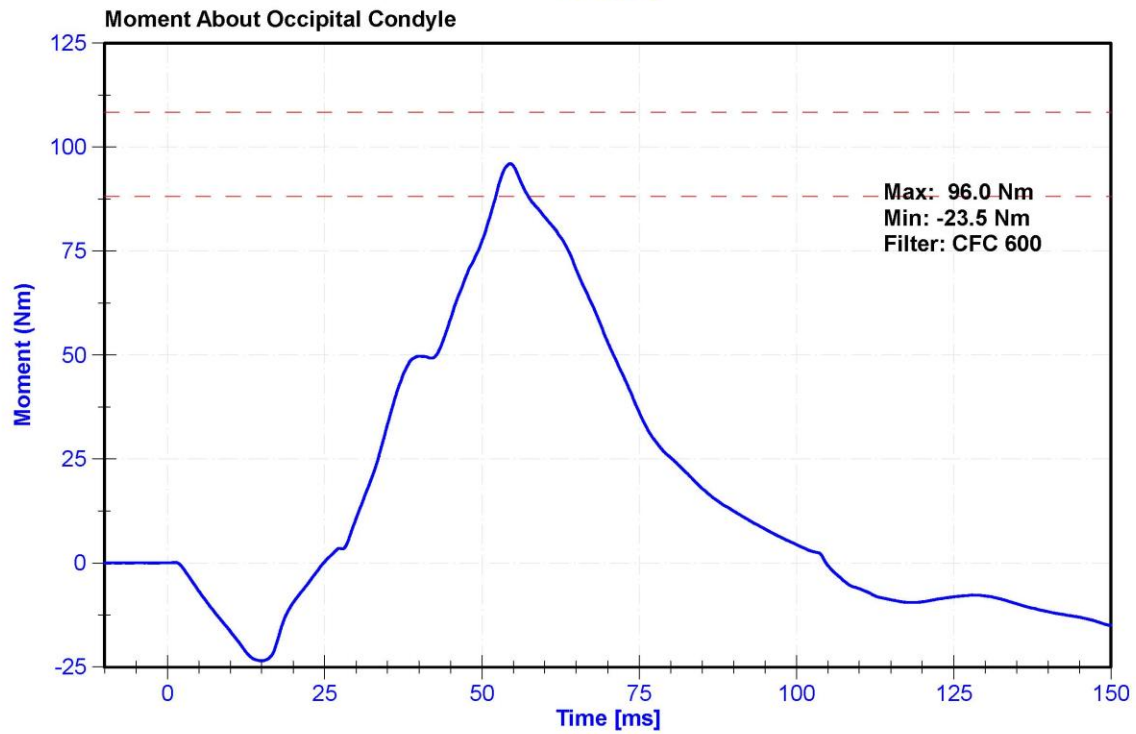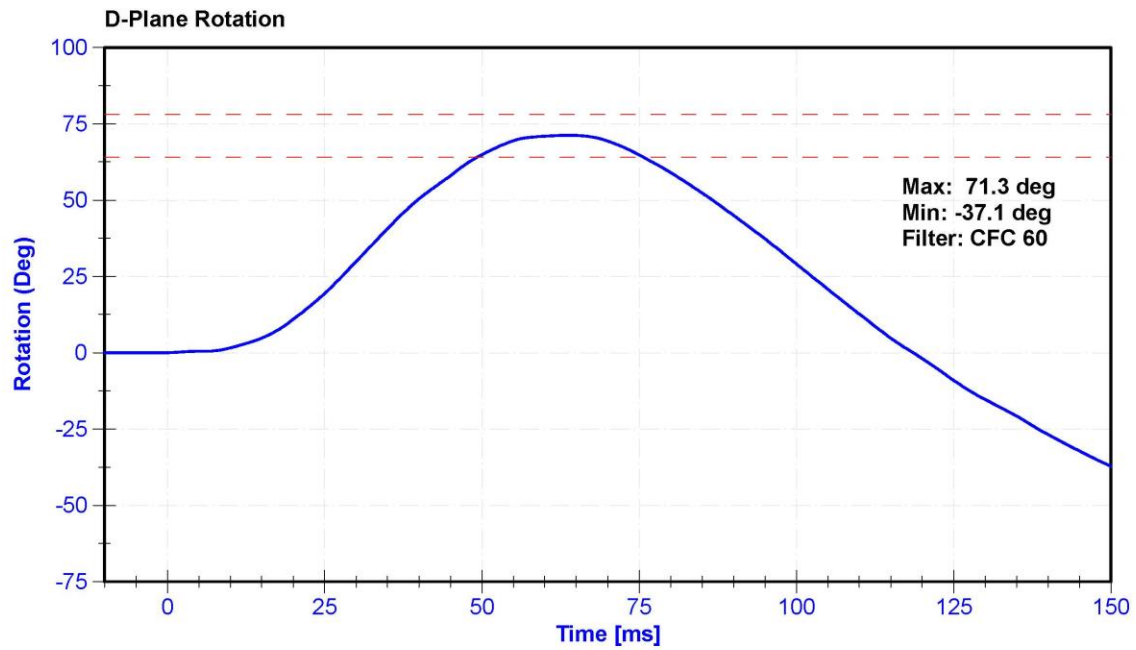

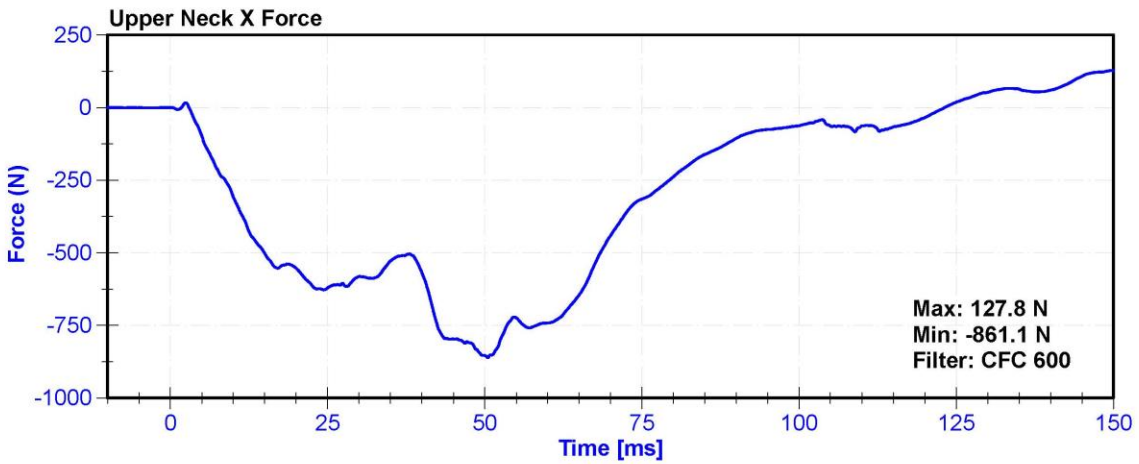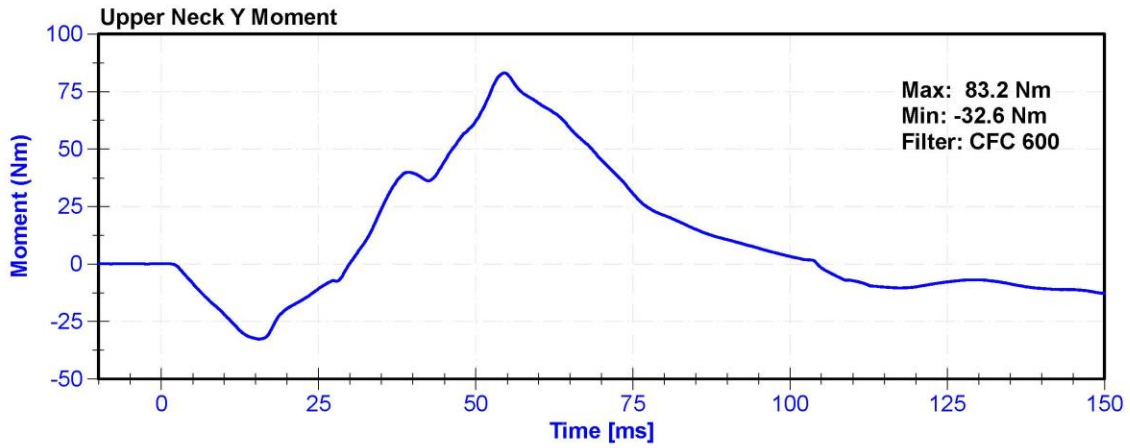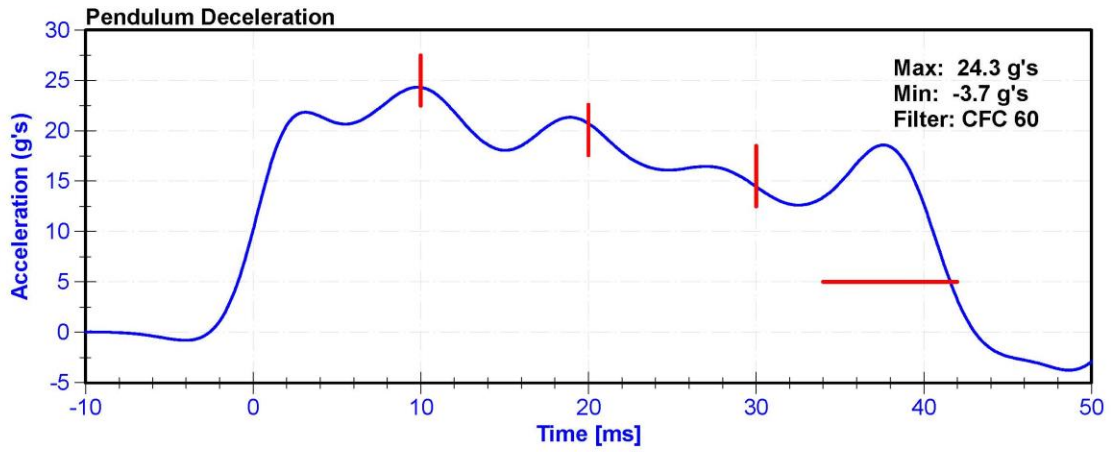

ATD Manufacturer	Humanetics	Test Technician	E. Helenbrook
ATD Serial Number	142	Laboratory Supervisor	K. Brogan



**Results**




Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21.4	Pass
Humidity	10	70	%	22.3	Pass
Velocity	5.94	6.19	m/s	5.964	Pass
Pendulum Deceleration at 10ms	17.2	21.2	g's	19.91	Pass
Pendulum Deceleration at 20ms	14	19	g's	17.0	Pass
Pendulum Deceleration at 30ms	11	16	g's	14.1	Pass
Max. Pendulum Deceleration After 30ms	0	22	g's	20.1	Pass
Pendulum Deceleration Time to 5 g's	38	46	ms	44.7	Pass
Maximum D Plane Rotation	81	106	deg	95.5	Pass
Time to Maximum Rotation	72	82	ms	78.2	Pass
Rotation Decay to Zero	147	174	ms	158.3	Pass
Minimum Moment About OC	-80	-52.9	Nm	-67.76	Pass
Time to Minimum Moment	65	79	ms	71.5	Pass
Moment Decay to Zero	120	148	ms	141.0	Pass

**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	ENDEVCO 7231CT	AC-C16503 Striker	2/6/2020	2/5/2021
Pendulum Potentiometer	ETI SP22G	DS-LABPOT1	9/17/2020	9/17/2021
Condyle Potentiometer	ETI SP22G	DS-LABPOT2	9/17/2020	9/17/2021
Upper Neck Load Cell	DENTON 1716A	LC-2186Fx	11/10/2020	11/10/2021



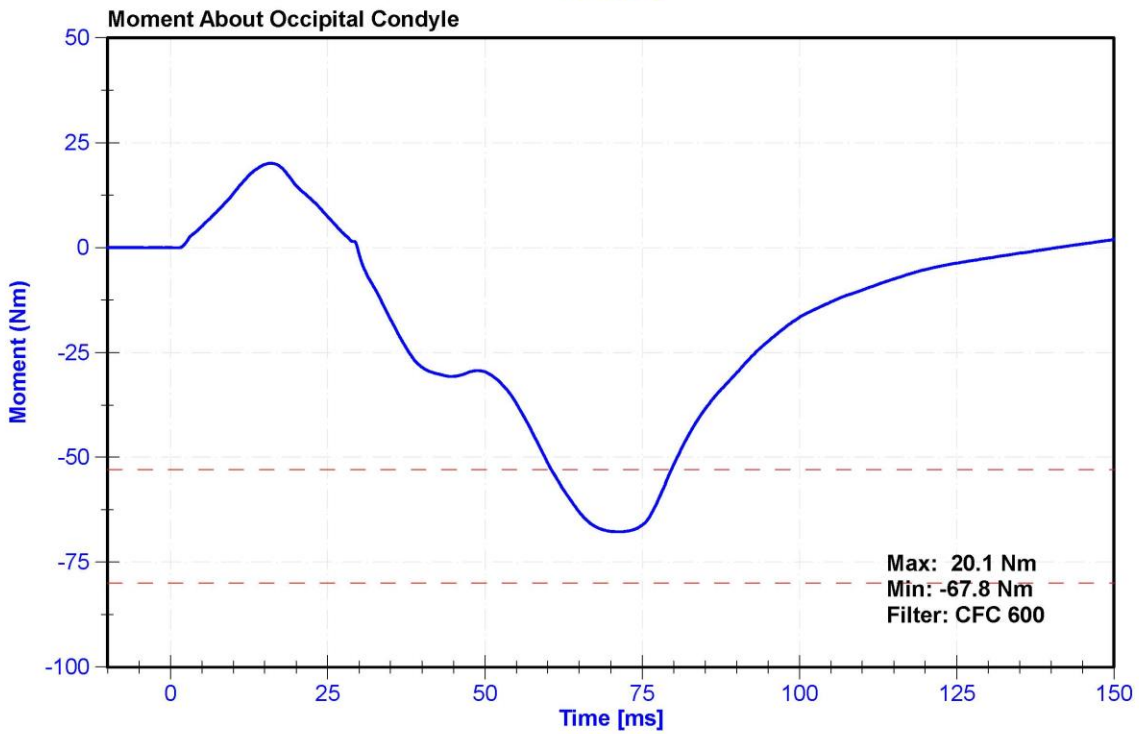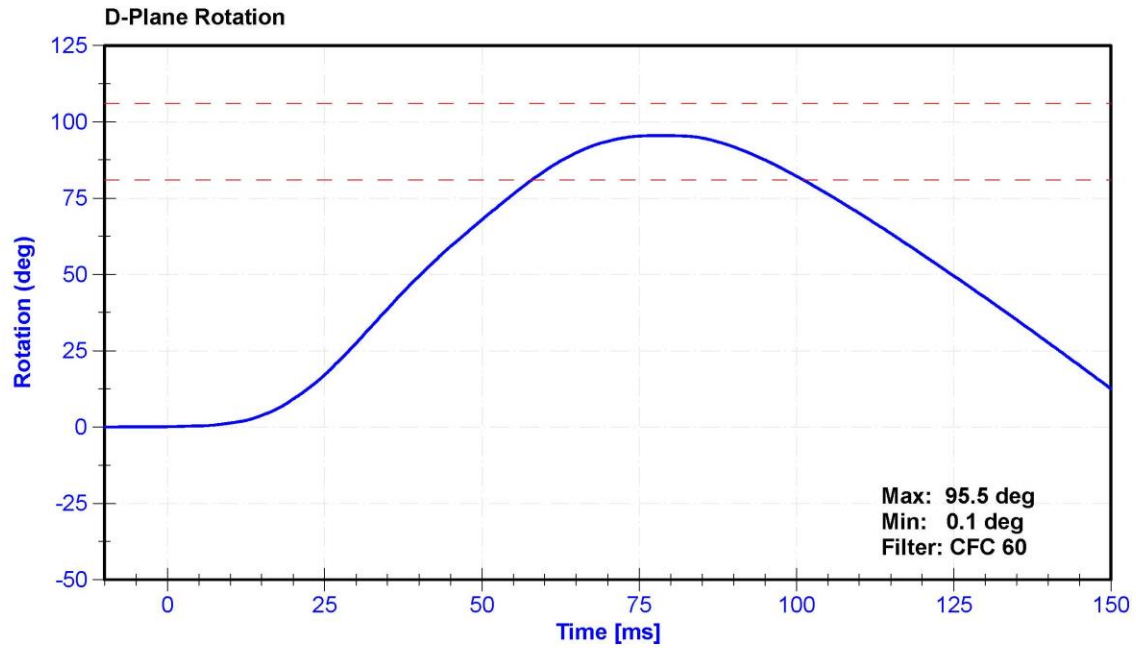

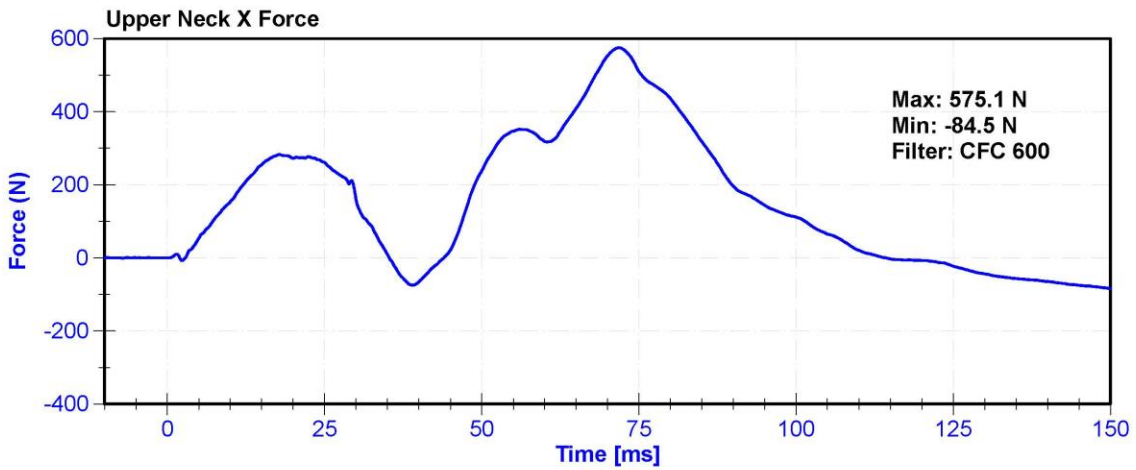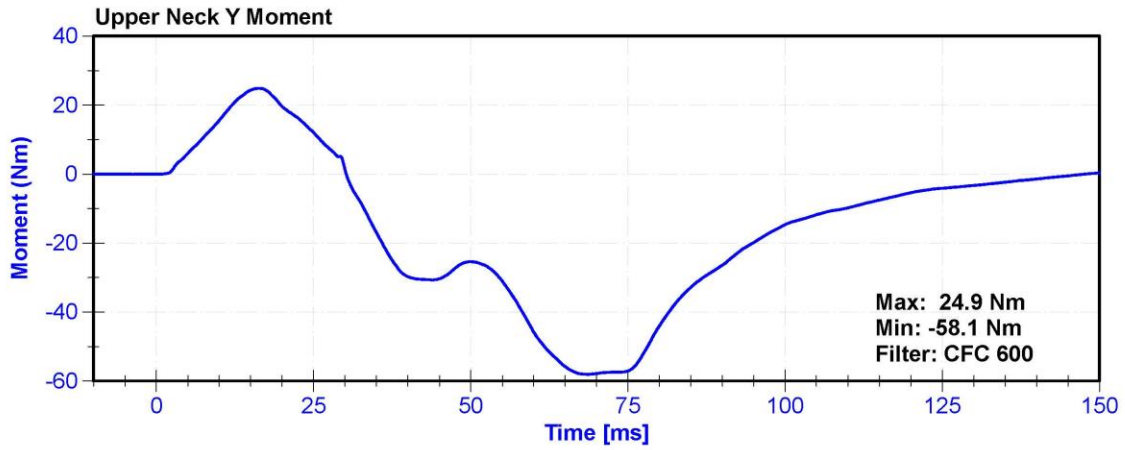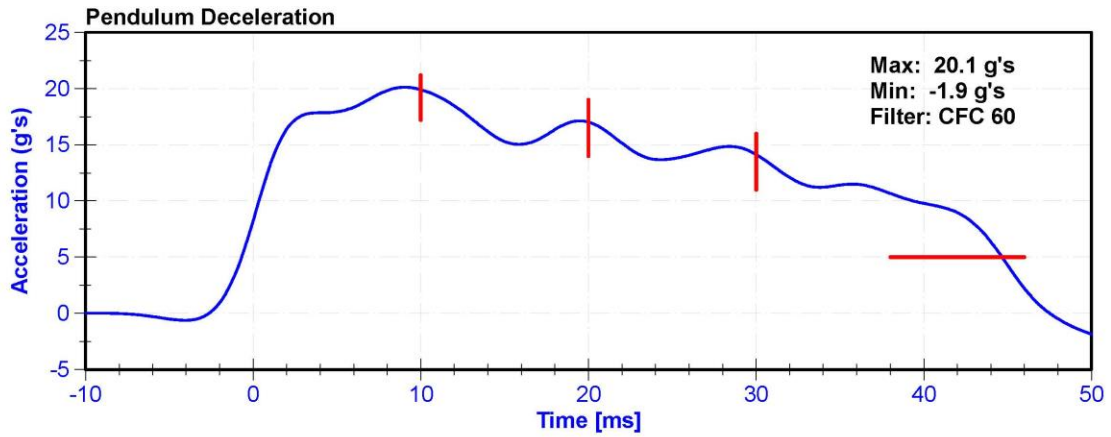


ATD Manufacturer	Humanetics	Test Technician	D.Reinhard
ATD Serial Number	142	Laboratory Supervisor	K. Brogan



**Results**



Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	20.8	Pass
Humidity	10	70	%	27	Pass
Velocity	6.59	6.83	m/s	6.684	Pass
Chest Displacement	-72.6	-63.5	mm	-69.46	Pass
Resistive Force	5160	5894	N	5754.2	Pass
Hysteresis	65	85	%	70.8	Pass

**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	MSI 64C-2000	A286228	1/29/2020	1/28/2021
Chest Potentiometer	Servo 6209-2038	DS-142	11/19/2020	5/20/2021

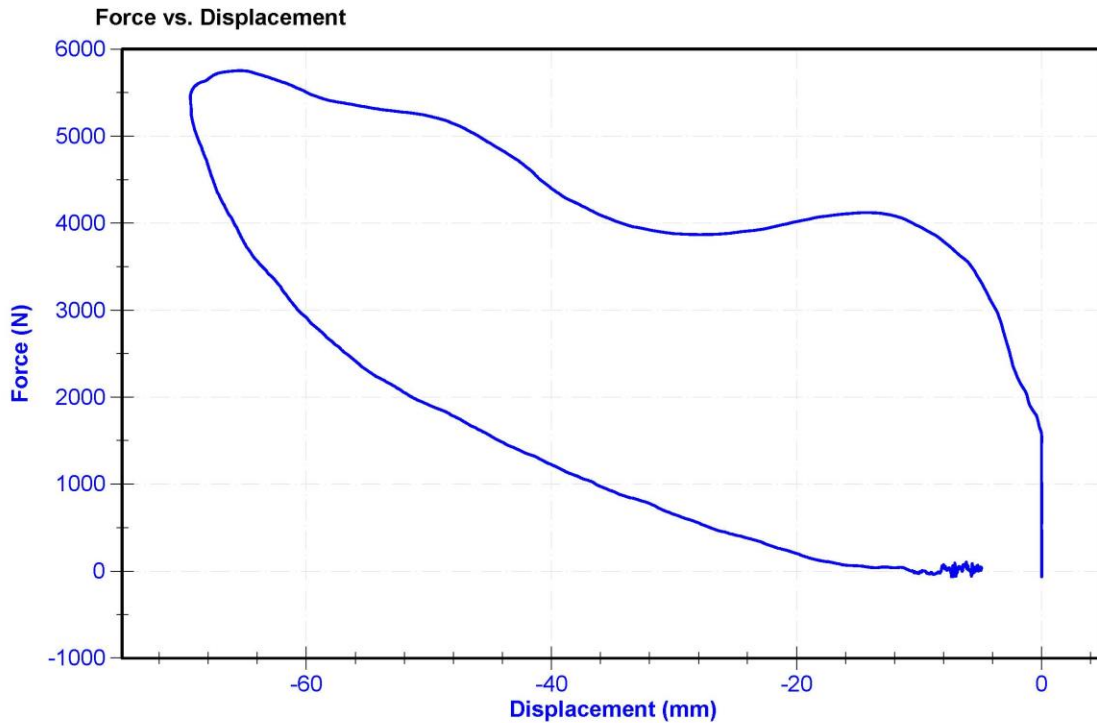

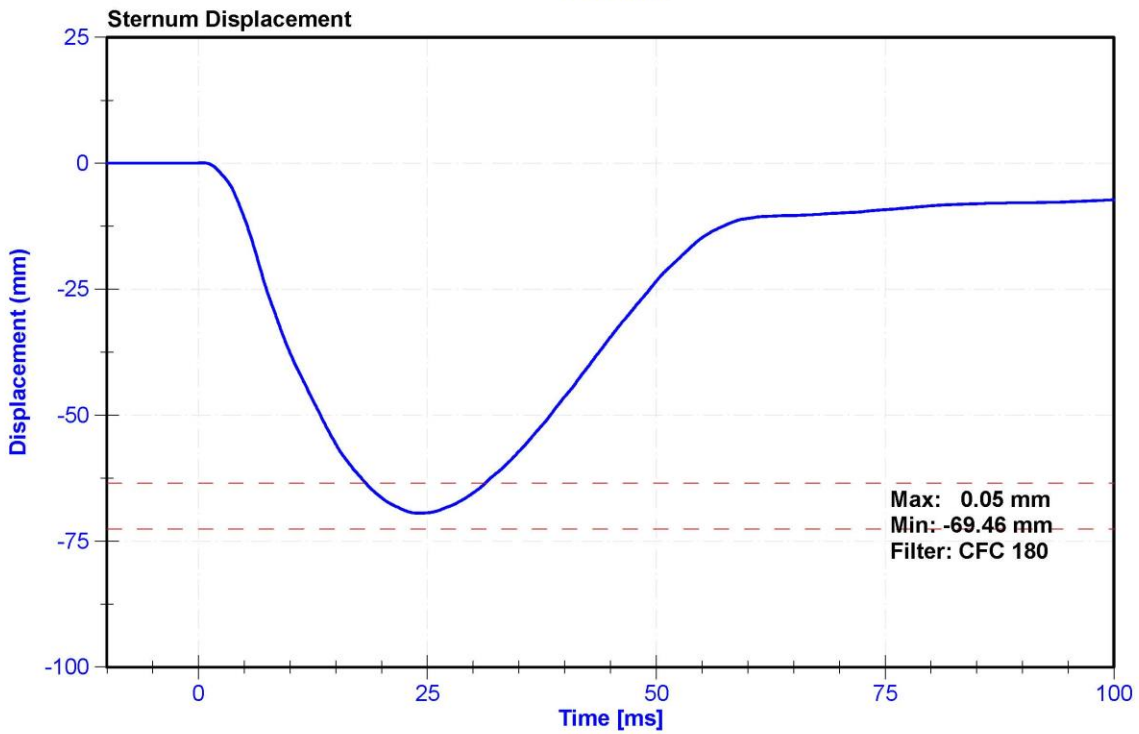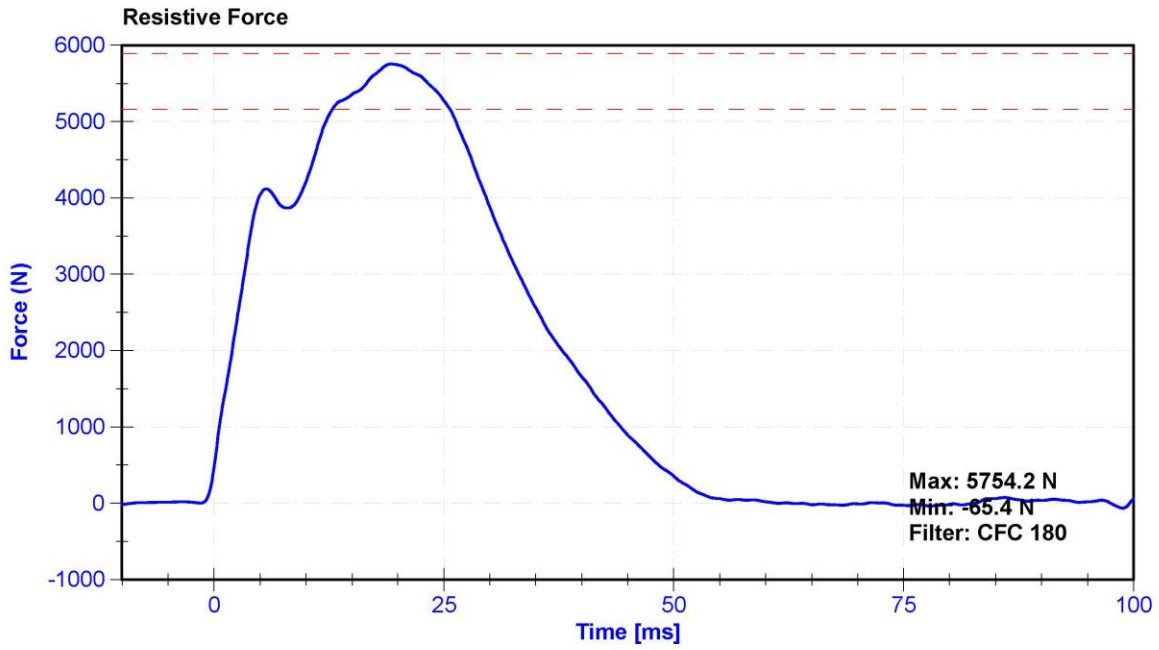

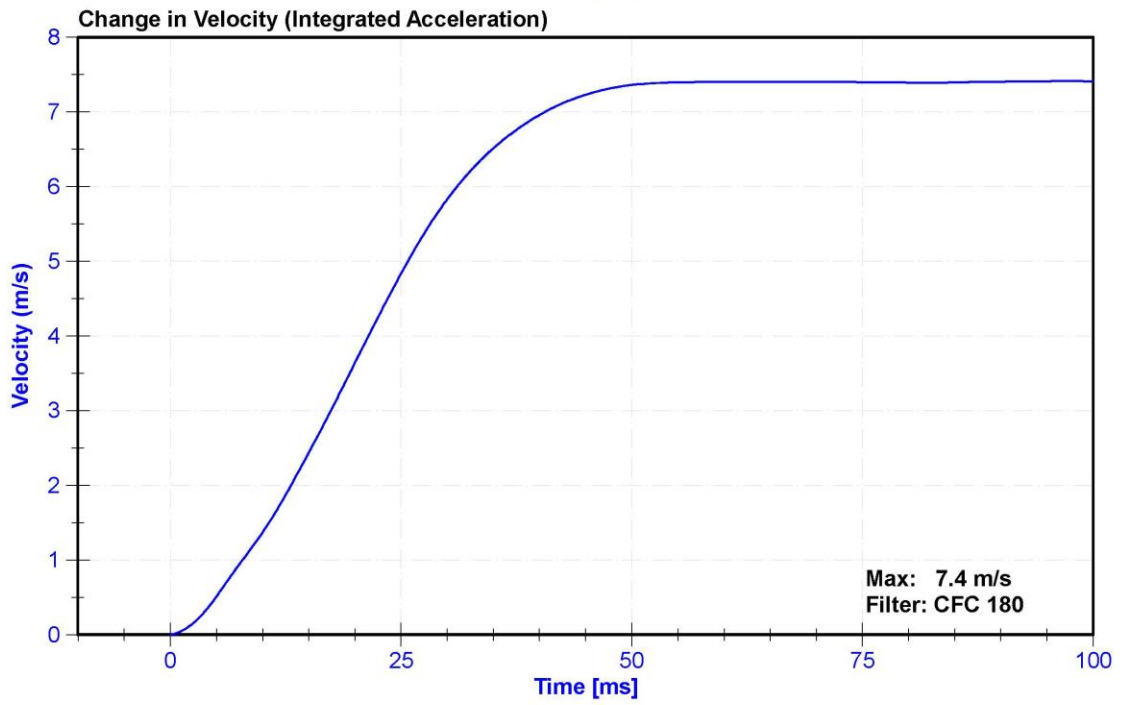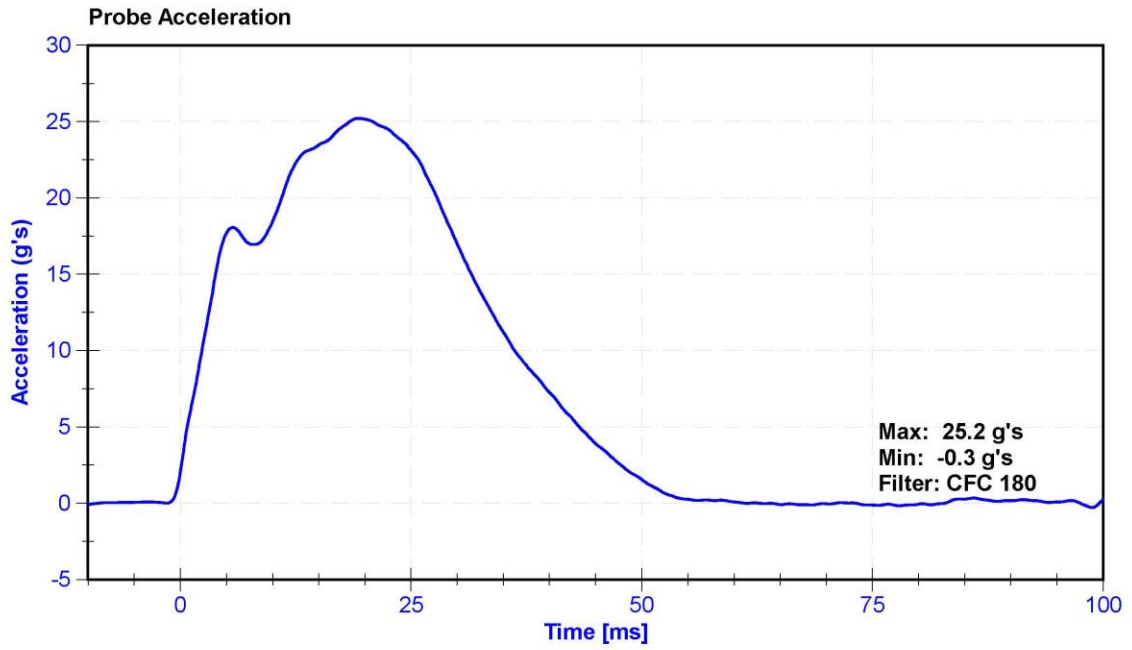


ATD Manufacturer	Humanetics	Test Technician	E. Helenbrook
ATD Serial Number	142	Laboratory Supervisor	K. Brogan

**Results**

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	18.9	25.6	°C	21.5	Pass
Humidity	10	70	%	22.3	Pass
Average Velocity	5	10	deg/s	7.2	Pass
Angle at 203Nm	40	50	deg	45.2	Pass
Moment at 30 degrees	0	94.9	Nm	86.1	Pass

**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Potentiometer	ETI SP22	DS-0008	9/18/2020	9/18/2021
Load Cell	Key Trans 2301-02	LC-115 My	9/12/2020	9/12/2021

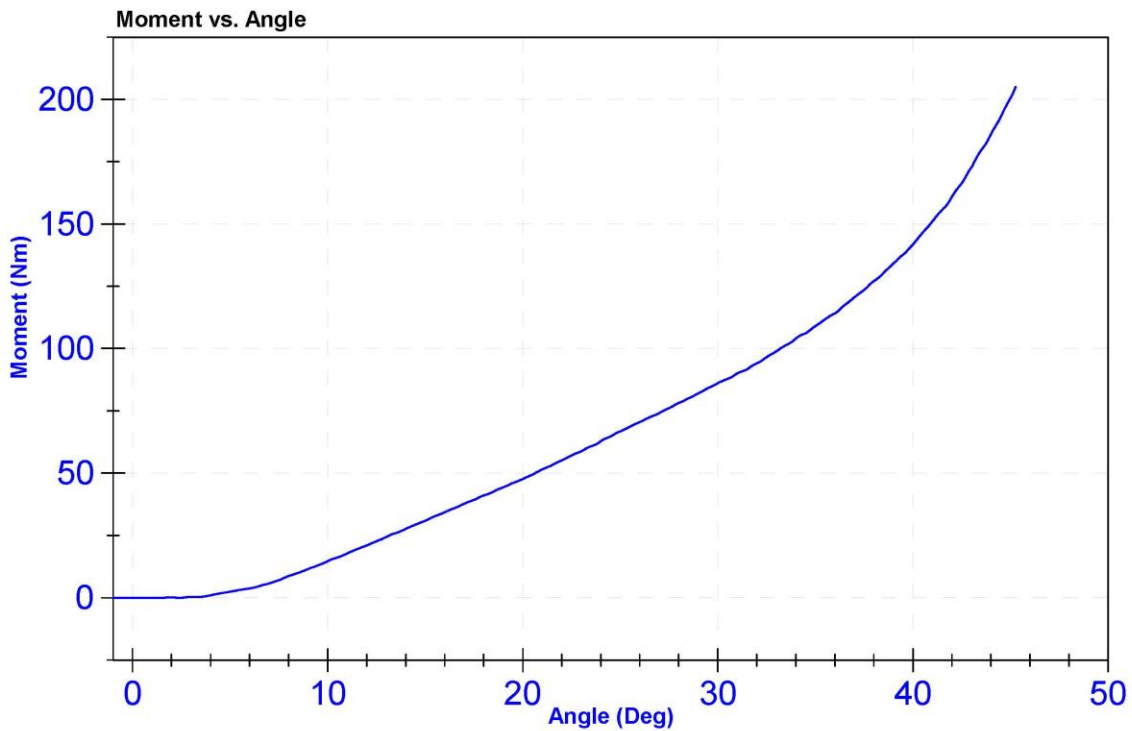


ATD Manufacturer	Humanetics	Test Technician	E. Helenbrook
ATD Serial Number	142	Laboratory Supervisor	K. Brogan

**Results**

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	18.9	25.6	°C	21.5	Pass
Humidity	10	70	%	22.3	Pass
Average Velocity	5	10	deg/s	7.2	Pass
Angle at 203Nm	40	50	deg	46.5	Pass
Moment at 30 degrees	0	94.9	Nm	92.4	Pass

**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Potentiometer	ETI SP22	DS-0008	9/18/2020	9/18/2021
Load Cell	Key Trans 2301-02	LC-115 My	9/12/2020	9/12/2021

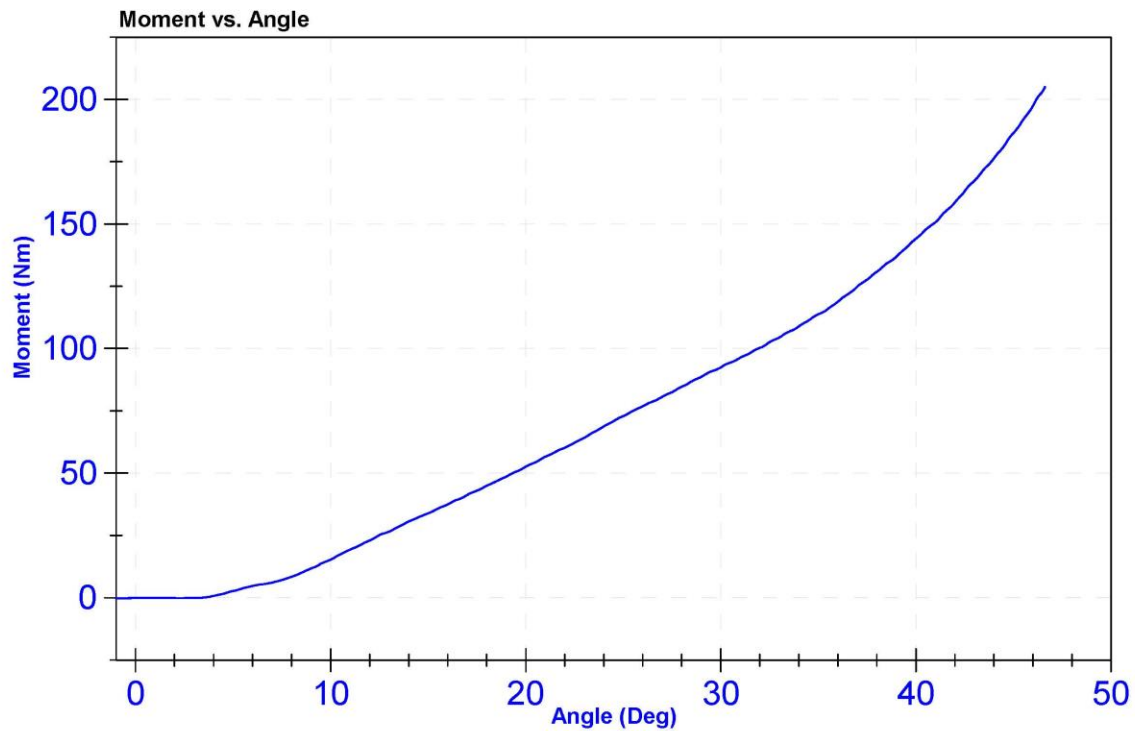


ATD Manufacturer	Humanetics	Test Technician	E. Helenbrook
ATD Serial Number	142	Laboratory Supervisor	K. Brogan

**Results**



Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	18.9	25.6	°C	21.6	Pass
Humidity	10	70	%	22.3	Pass
Velocity	2.07	2.13	m/s	2.101	Pass
Maximum Resistive Force	4720	5780	N	5206.9	Pass

**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	MSI 64C-2000	A279031	5/8/2020	5/8/2021

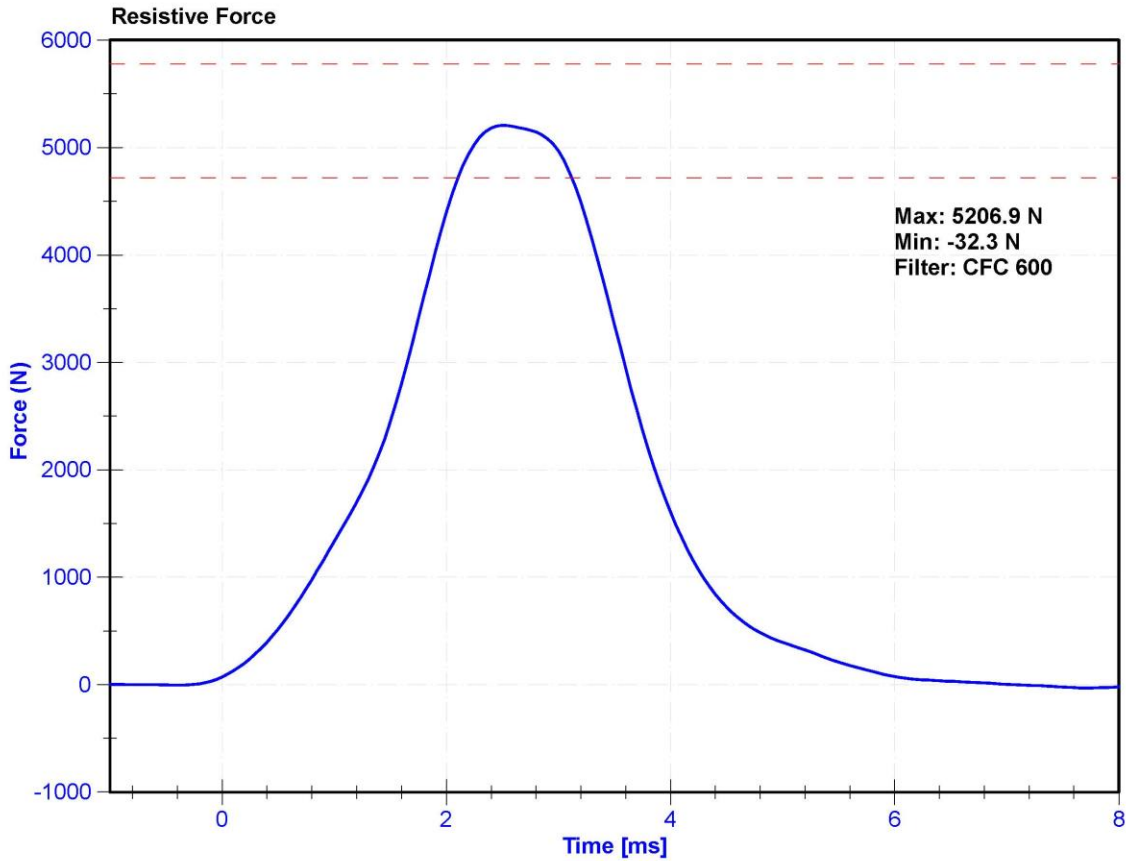



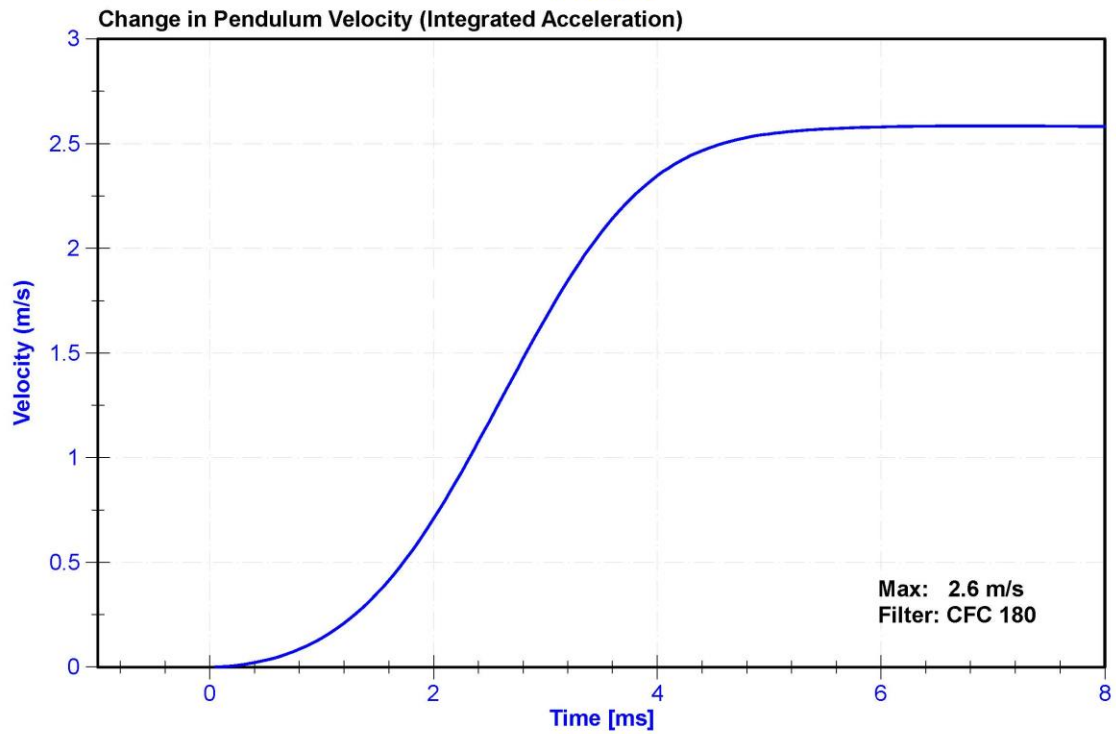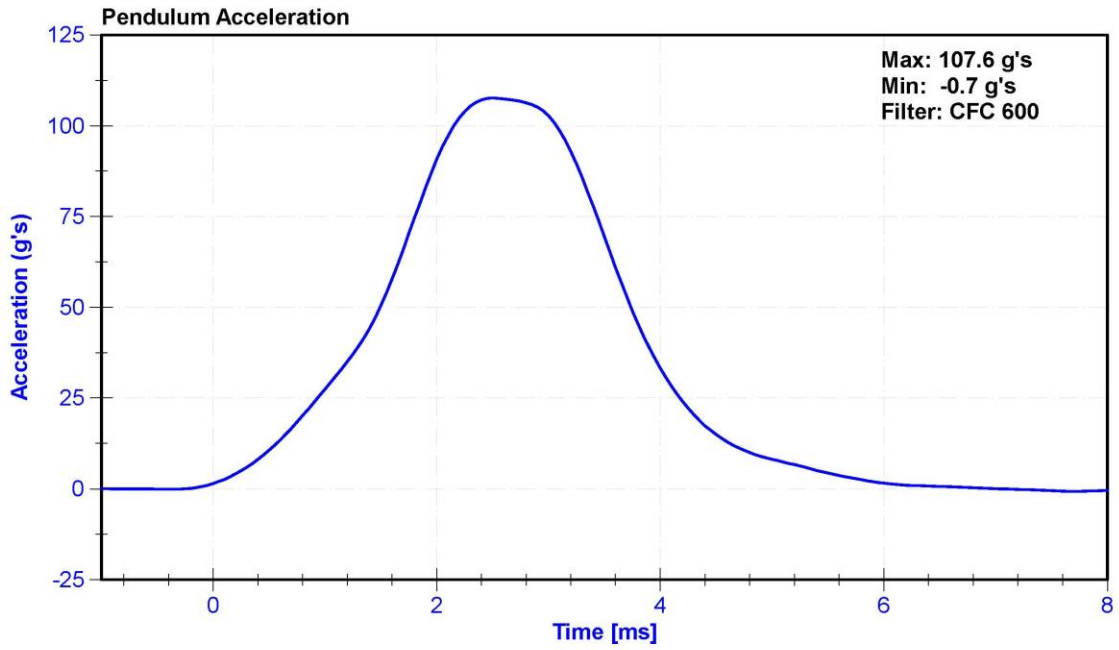


ATD Manufacturer	Humanetics	Test Technician	E. Helenbrook
ATD Serial Number	142	Laboratory Supervisor	K. Brogan



**Results**

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	18.9	25.6	°C	21.2	Pass
Humidity	10	70	%	23.2	Pass
Velocity	2.07	2.13	m/s	2.099	Pass
Maximum Resistive Force	4720	5780	N	5602.1	Pass

**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	MSI 64C-2000	A279031	5/8/2020	5/8/2021

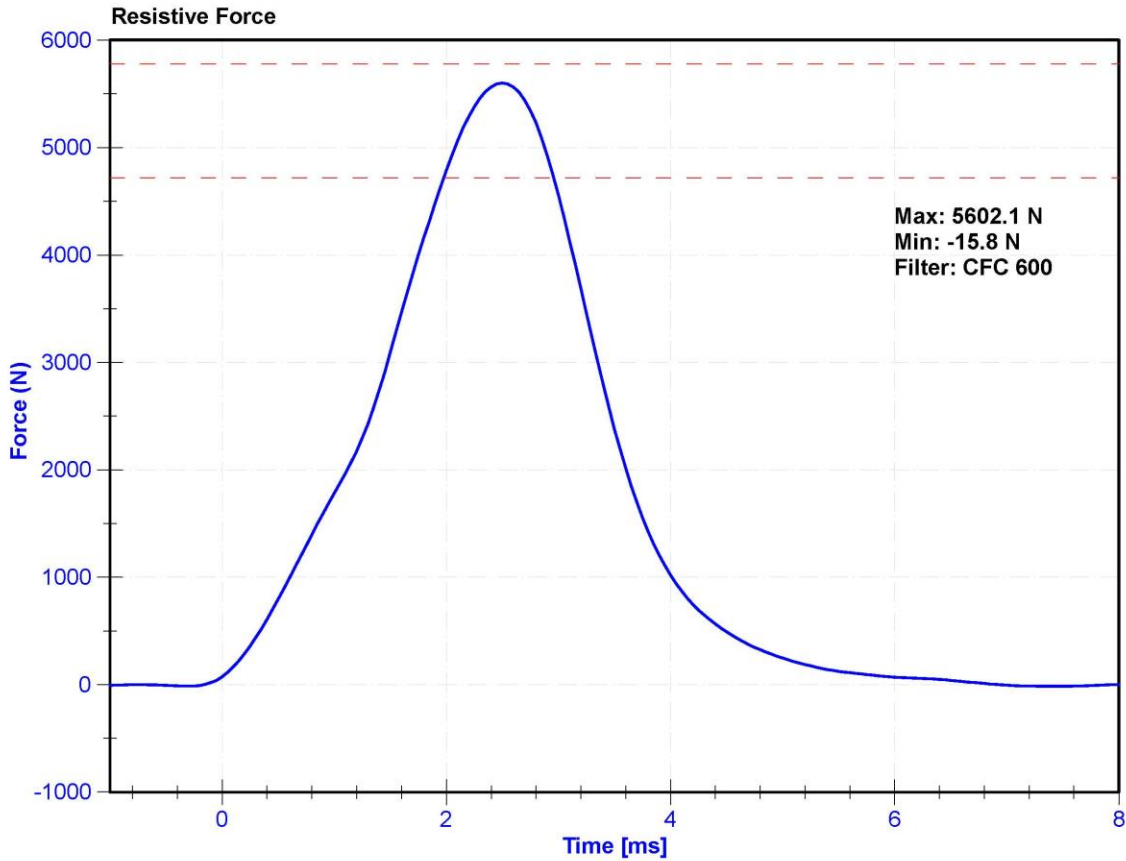

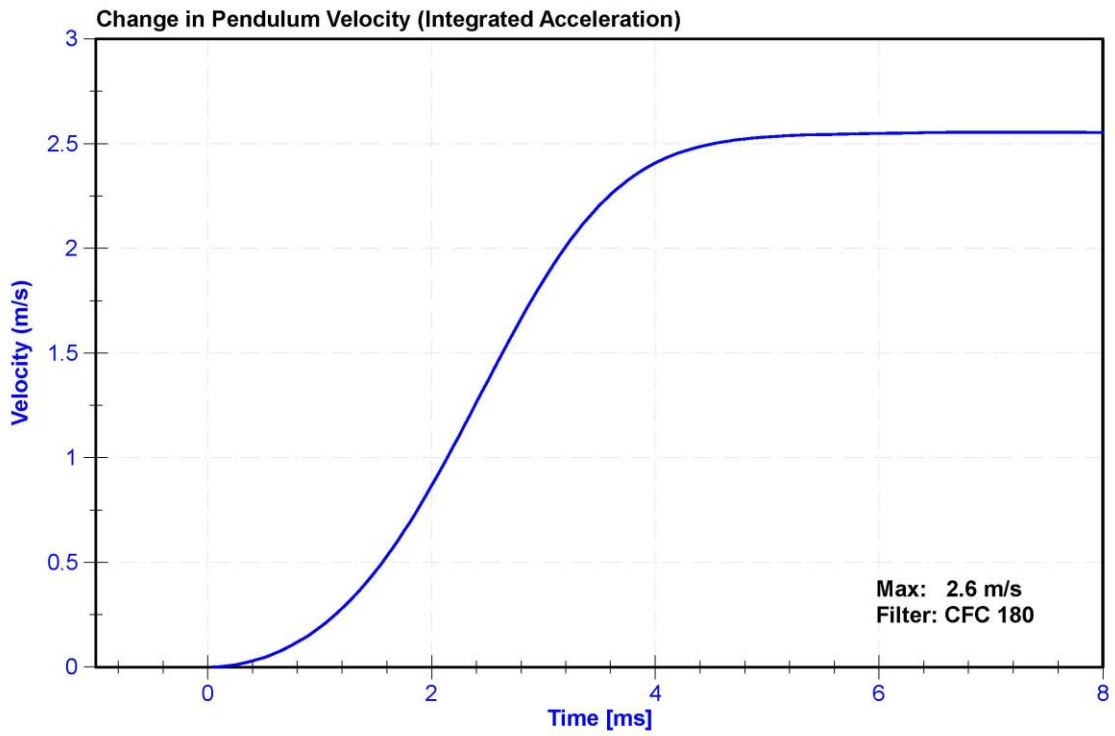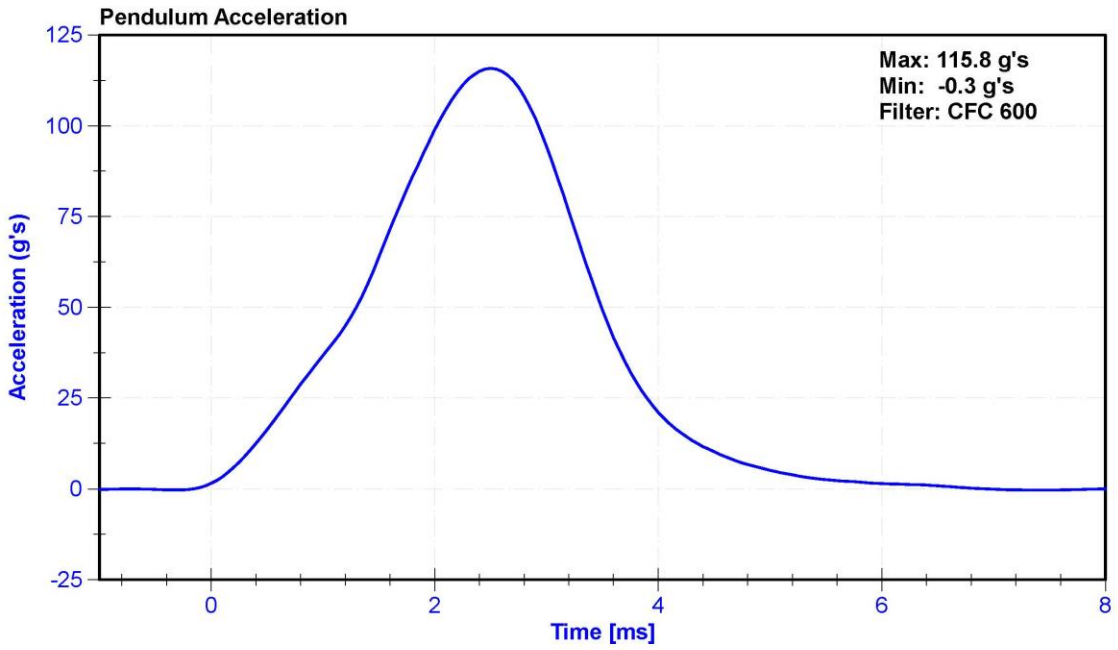

**CALIBRATION TEST RESULTS**

**POST-TEST**

**HYBRID III 5<sup>TH</sup> PERCENTILE FEMALE - PASSENGER ATD**

**SERIAL NO: 140**




External Measurements - Hybrid 3 - 5th Female

Technician: K. Brogan

Date: 1/6/2021

Dummy Serial Number: 140

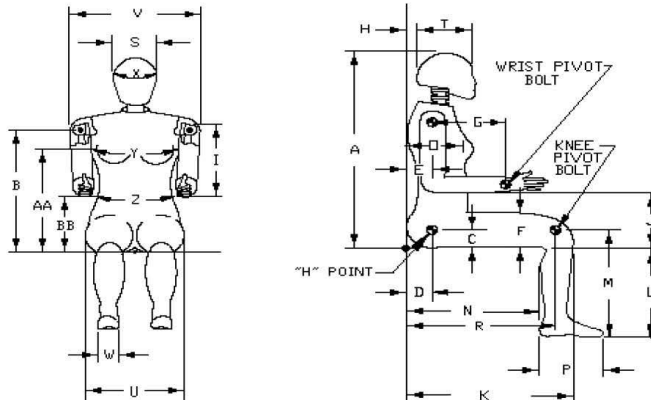

Symbol	Description	Specification (mm)		Result (mm)	Pass/Fail
A	Sitting Height	775	800	790	Pass
B	Shoulder Pivot Height	432	457	442	Pass
C	H-Point Height	81	86	83	Pass
D	H-Point from Backline	145	150	146	Pass
E	Shoulder Pivot from Backline	69	84	78	Pass
F	Thigh Clearance	119	135	126	Pass
G	Back of Elbow to Wrist Pivot	244	259	252	Pass
H	Head Back to Backline	43	48	45	Pass
I	Shoulder to Elbow Length	277	297	291	Pass
J	Elbow Rest Height	183	203	197	Pass
K	Buttock to Knee Length	521	546	541	Pass
L	Popliteal Height	356	376	366	Pass
M	Knee Pivot Height	394	419	410	Pass
N	Buttock Popliteal Length	414	439	428	Pass
O	Chest Depth without Jacket	175	191	182	Pass
P	Foot Length (right)	219	234	229	Pass
R	Buttock To Knee Pivot Length	457	483	465	Pass
S	Head Breadth	137	147	142	Pass
T	Head Depth	178	188	180	Pass
U	Hip Breadth	300	315	313	Pass
V	Shoulder Breadth	351	366	361	Pass
W	Foot Breadth	79	94	83	Pass
X	Head Circumference	528	549	540	Pass
Y	Chest Circumference with Jacket	851	881	874	Pass
Z	Waist Circumference	460	790	624	Pass
AA	Reference Location (Chest Circumference)	333	358	345	Pass
BB	Reference Location (Waist Circumference)	160	170	165	Pass


ATD Manufacturer	Humanetics	Test Technician	D.Reinhard
ATD Serial Number	140	Laboratory Supervisor	K. Brogan




**Results**

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	18.9	25.6	°C	20.7	Pass
Humidity	10	70	%	27	Pass
Resultant Acceleration	250	300	g's	276.5	Pass
Oscillation	0	10	%	1.8	Pass
Lateral Acceleration	-15	15	g's	5.8	Pass

**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
X Accelerometer	Endevco 7264C	P52008	9/22/2020	3/23/2021
Y Accelerometer	Endevco 7264C	P83335	9/22/2020	3/23/2021
Z Accelerometer	Endevco 7264C	T11252	9/22/2020	3/23/2021

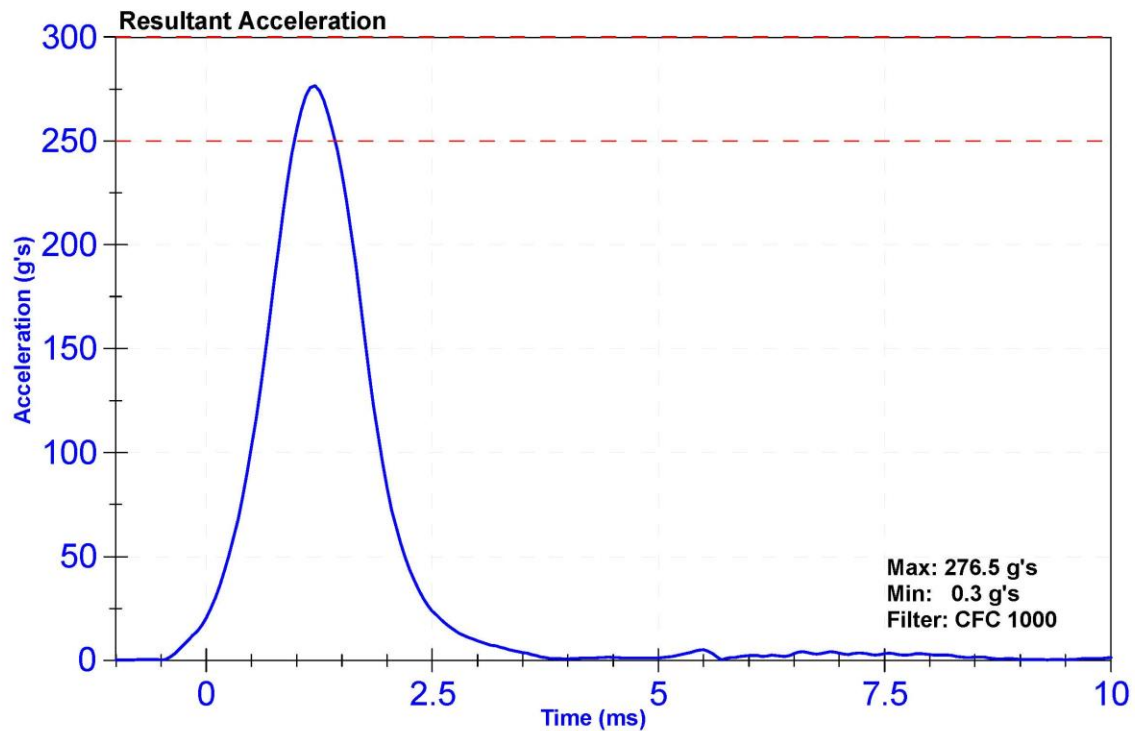

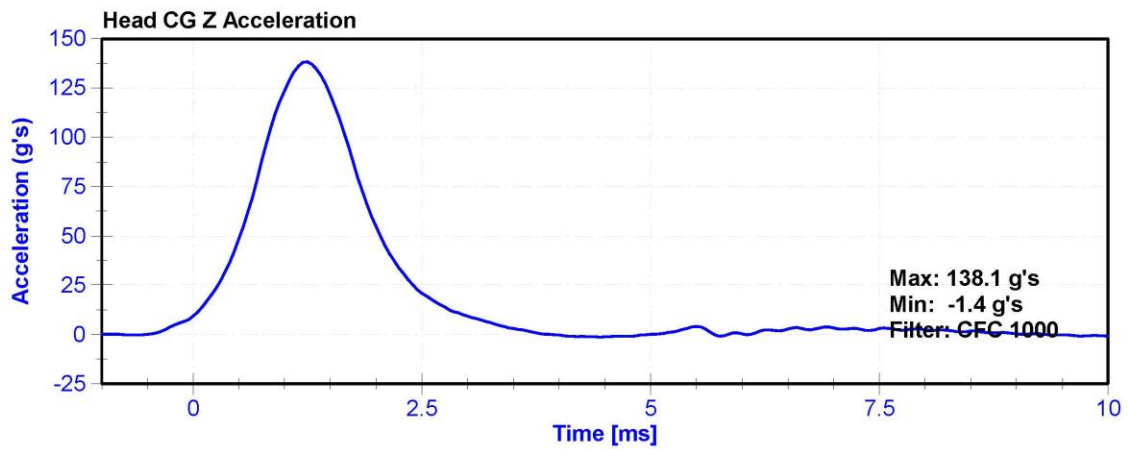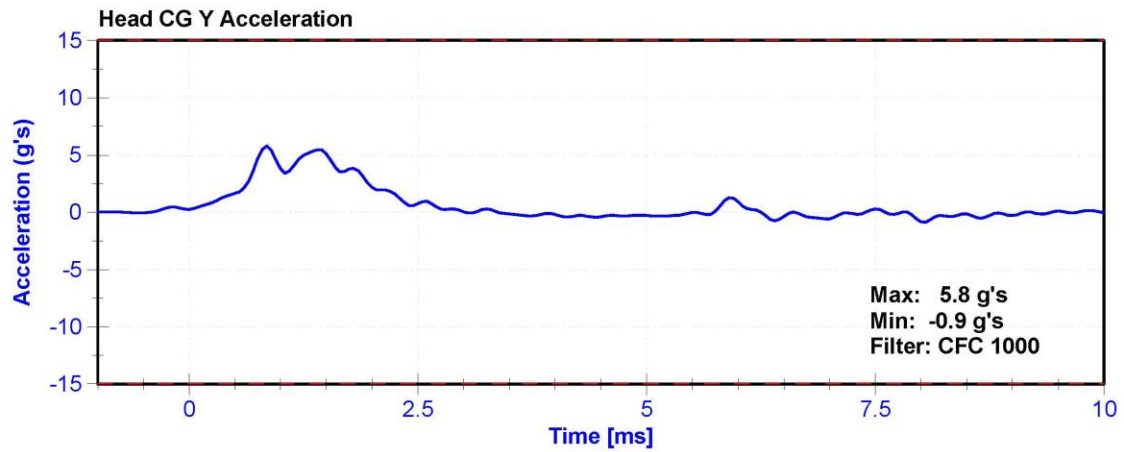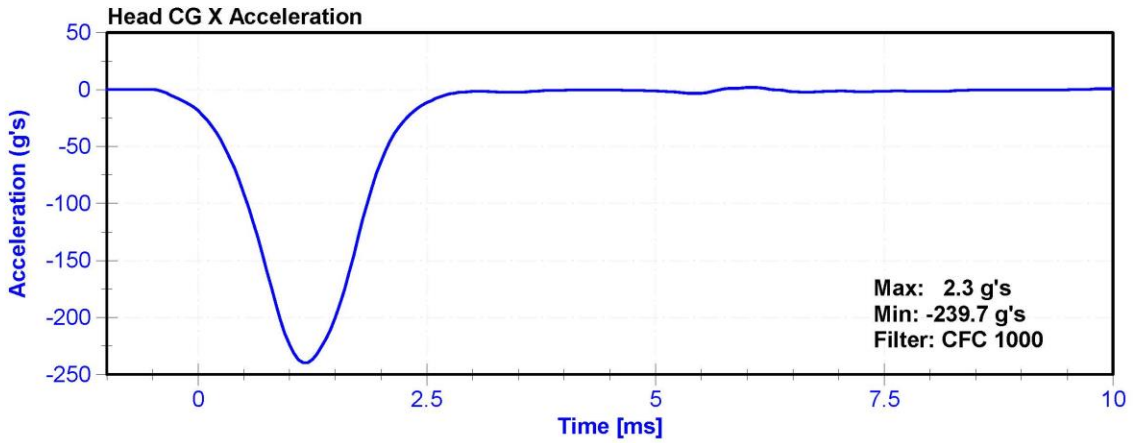


ATD Manufacturer	Humanetics	Test Technician	D.Reinhard
ATD Serial Number	140	Laboratory Supervisor	K. Brogan

**Results**



Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	20.9	Pass
Humidity	10	70	%	29.0	Pass
Velocity	6.89	7.13	m/s	7.013	Pass
Pendulum Impulse at 10ms	2.1	2.5	m/s	2.25	Pass
Pendulum Impulse at 20ms	4.0	5.0	m/s	4.52	Pass
Pendulum Impulse at 30ms	5.8	7.0	m/s	6.36	Pass
Max D Plane Rotation	77	91	deg	78.5	Pass
Max Moment During Rotation Interval	69	83	Nm	80.2	Pass
Moment Decay to 10.0 Nm	80	100	ms	87.6	Pass




**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	ENDEVCO 7231CT	AC-C16503 Striker	2/6/2020	2/5/2021
Pendulum Potentiometer	ETI SP22G	DS-LABPOT1	9/17/2020	9/17/2021
Condyle Potentiometer	ETI SP22G	DS-LABPOT2	9/17/2020	9/17/2021
Upper Neck Load Cell	Denton 1716A	LC-1916Fx	11/23/2020	11/23/2021

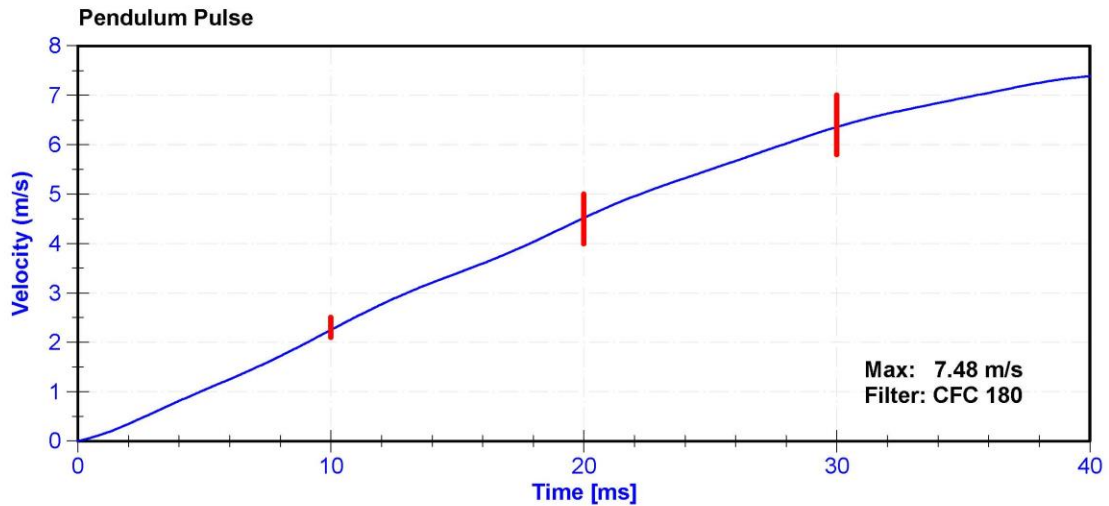



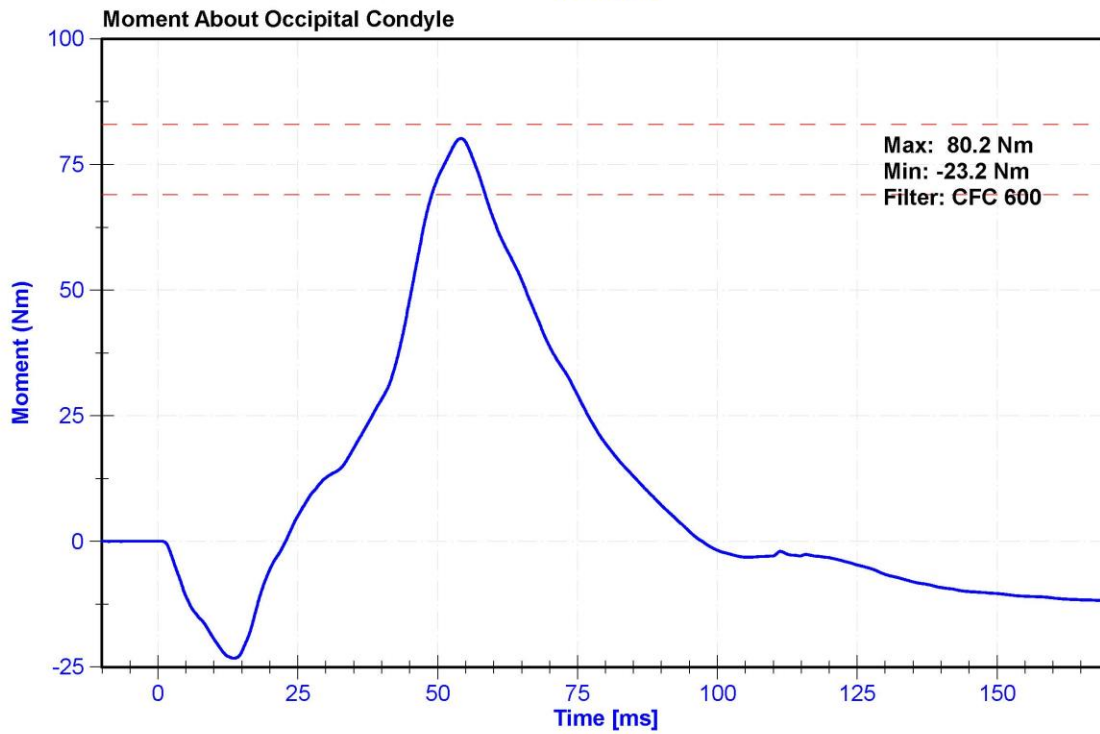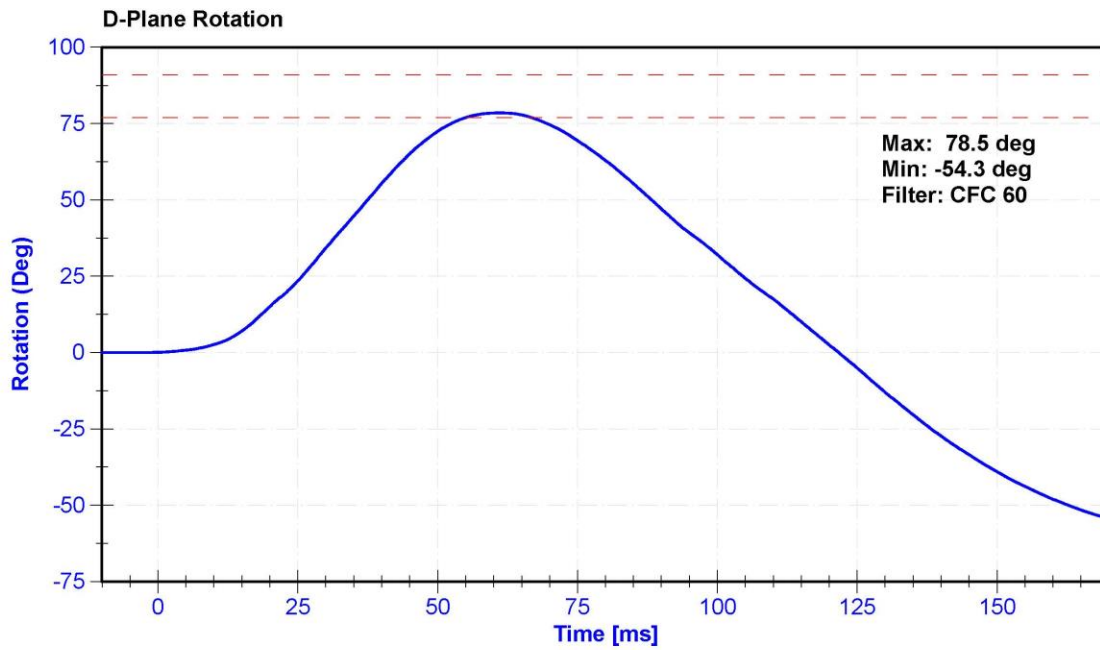

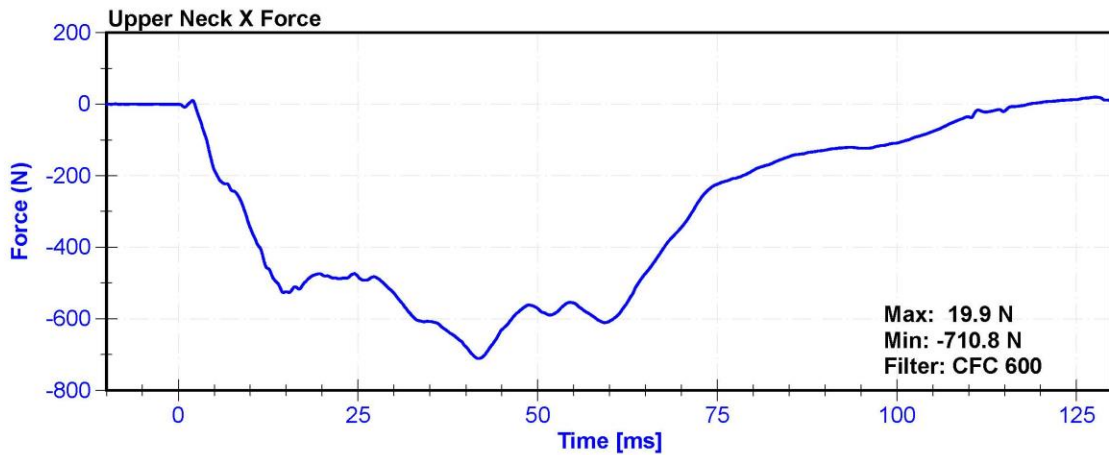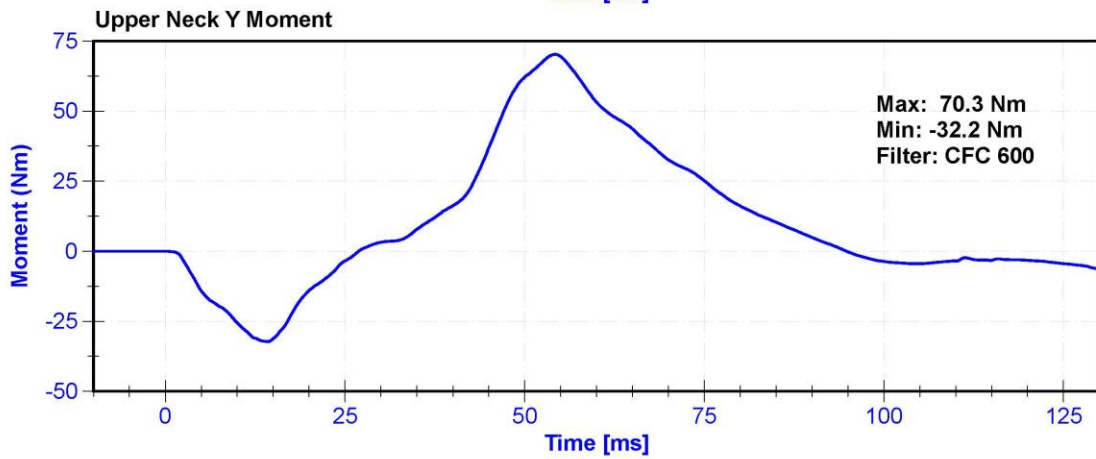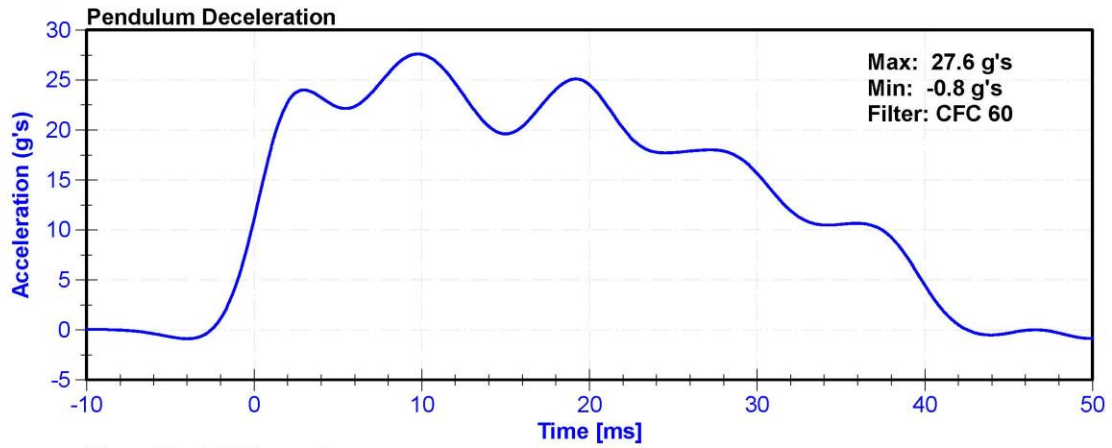


ATD Manufacturer	Humanetics	Test Technician	D.Reinhard
ATD Serial Number	140	Laboratory Supervisor	K. Brogan



**Results**




Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	20.8	Pass
Humidity	10	70	%	29.0	Pass
Velocity	5.95	6.19	m/s	6.046	Pass
Pendulum Impulse at 10ms	1.5	1.9	m/s	1.64	Pass
Pendulum Impulse at 20ms	3.1	3.9	m/s	3.40	Pass
Pendulum Impulse at 30ms	4.6	5.6	m/s	5.07	Pass
D Plane Rotation	99	114	deg	109.2	Pass
Moment During Rotation Interval	-65	-53	Nm	-60.1	Pass
Moment Decay to -10Nm	94	114	ms	103.4	Pass

**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	ENDEVCO 7231CT	AC-C16503 Striker	2/6/2020	2/5/2021
Pendulum Potentiometer	ETI SP22G	DS-LABPOT1	9/17/2020	9/17/2021
Condyle Potentiometer	ETI SP22G	DS-LABPOT2	9/17/2020	9/17/2021
Upper Neck Load Cell	Denton 1716A	LC-1916Fx	11/23/2020	11/23/2021

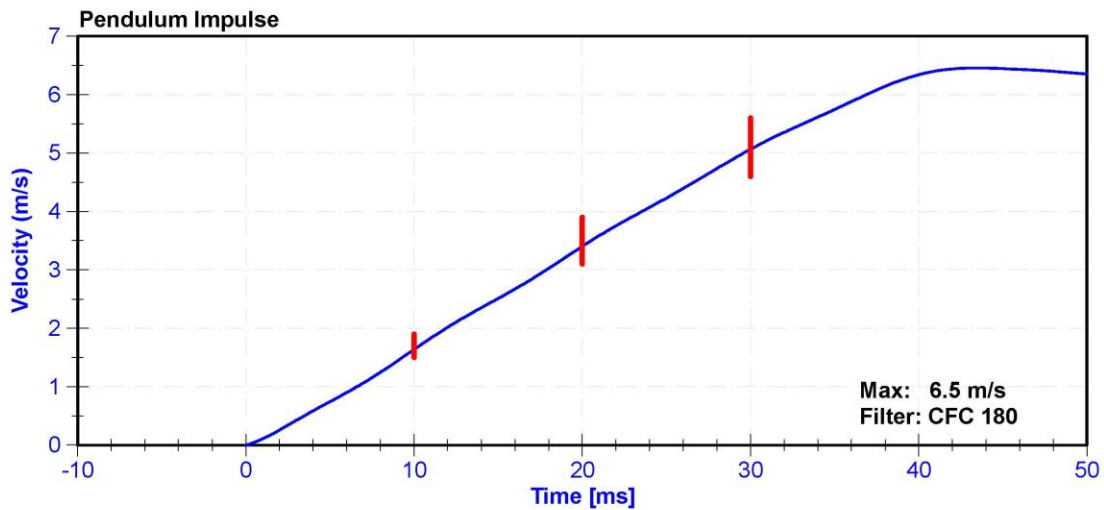

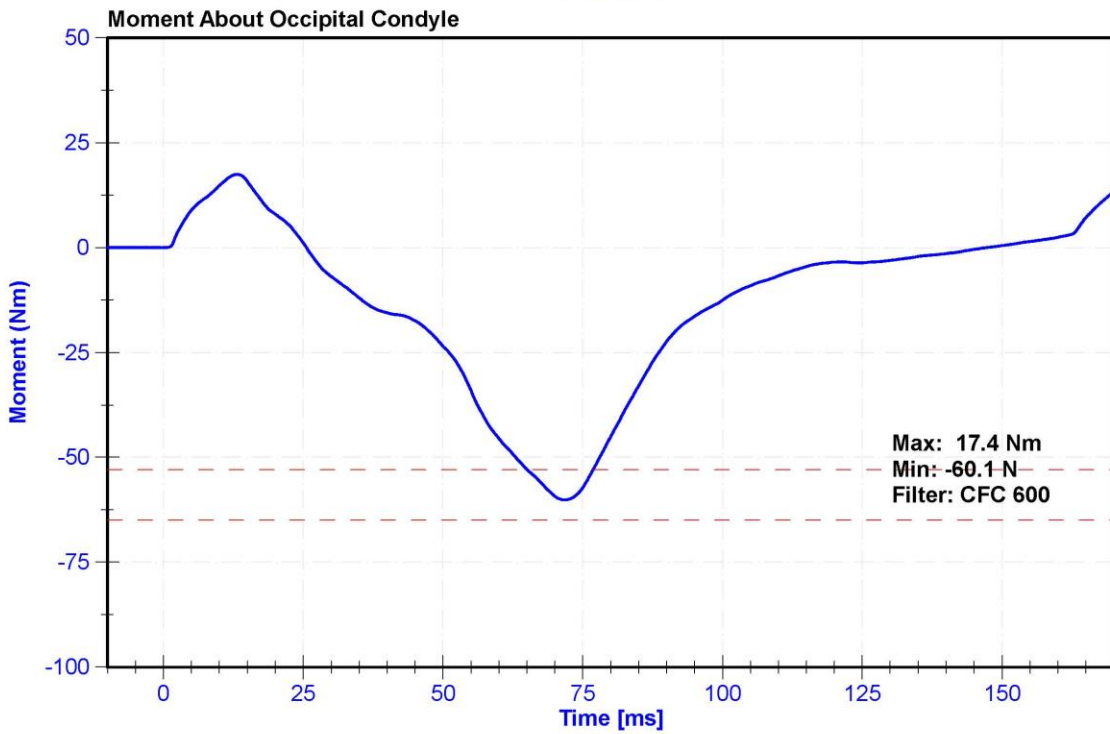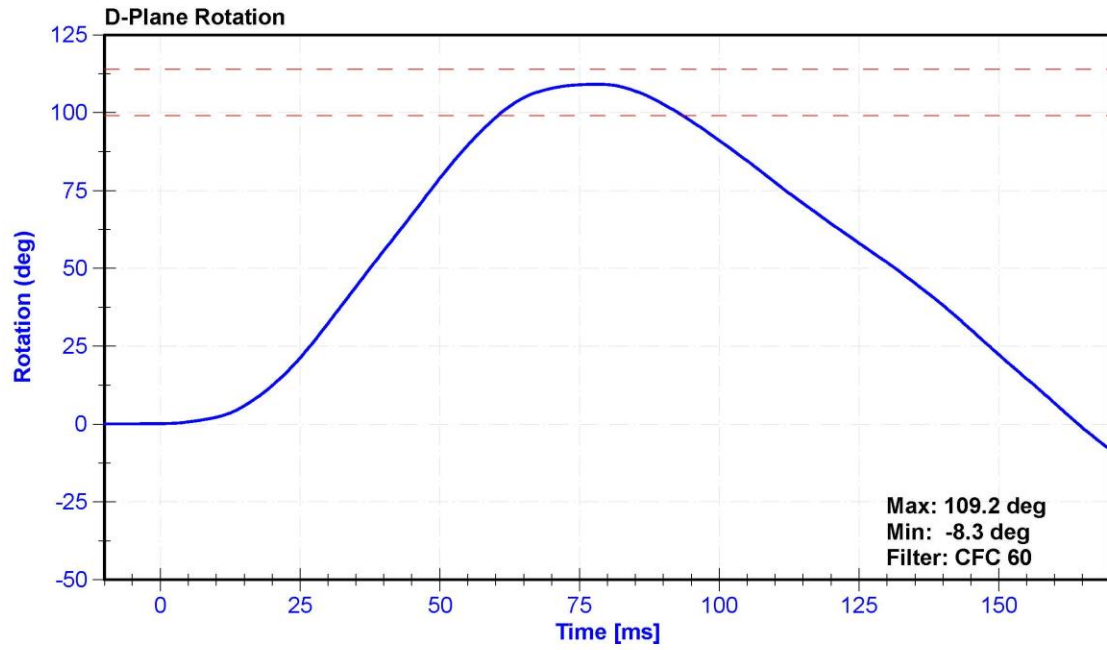

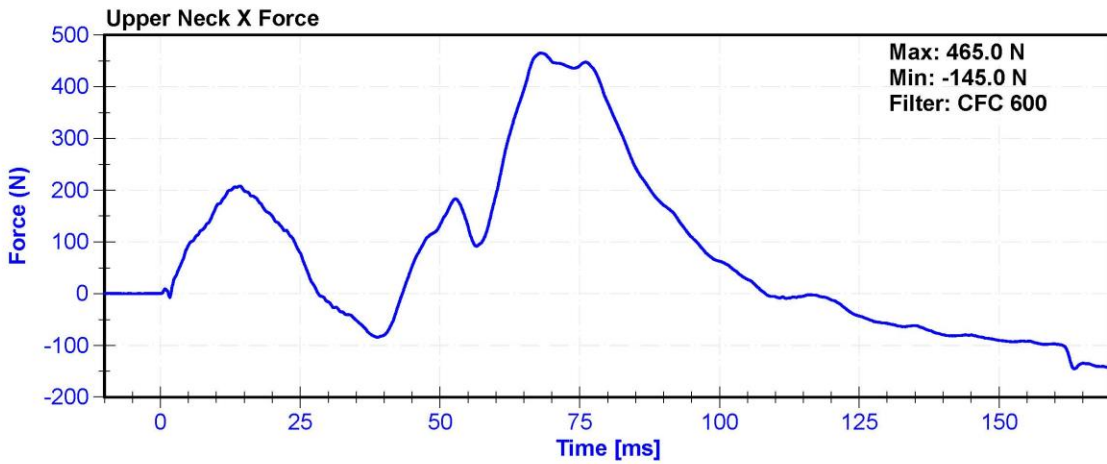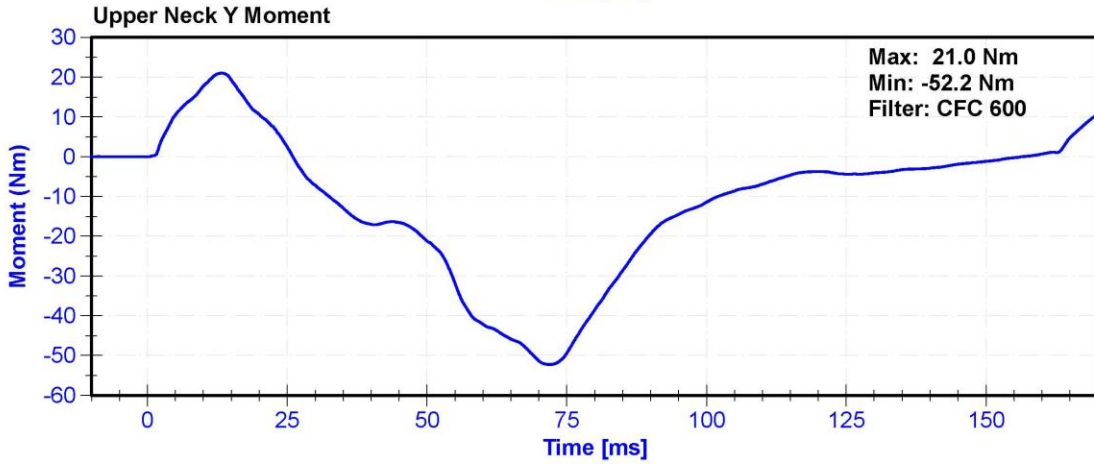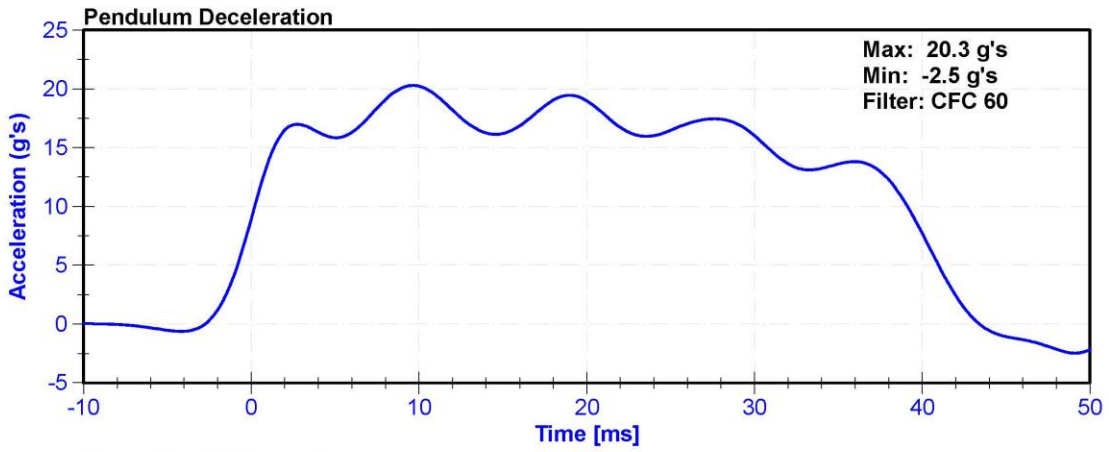


ATD Manufacturer	Humanetics	Test Technician	D.Reinhard
ATD Serial Number	140	Laboratory Supervisor	K. Brogan



**Results**

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	20.8	Pass
Humidity	10	70	%	27	Pass
Velocity	6.59	6.83	m/s	6.743	Pass
Chest Deflection	-58	-50	mm	-50.2	Pass
Maximum Resistive Force (50 to 58mm)	3900	4400	N	4169.1	Pass
Maximum Resistive Force (18 to 50mm)	0	4600	N	4416.9	Pass
Hysteresis	69	85	%	75.4	Pass


**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	MSI 64C-2000	A286228	1/29/2020	1/28/2021
Chest Potentiometer	SERVO 14CBI-3615	DS-140GFE	11/17/2020	5/18/2021

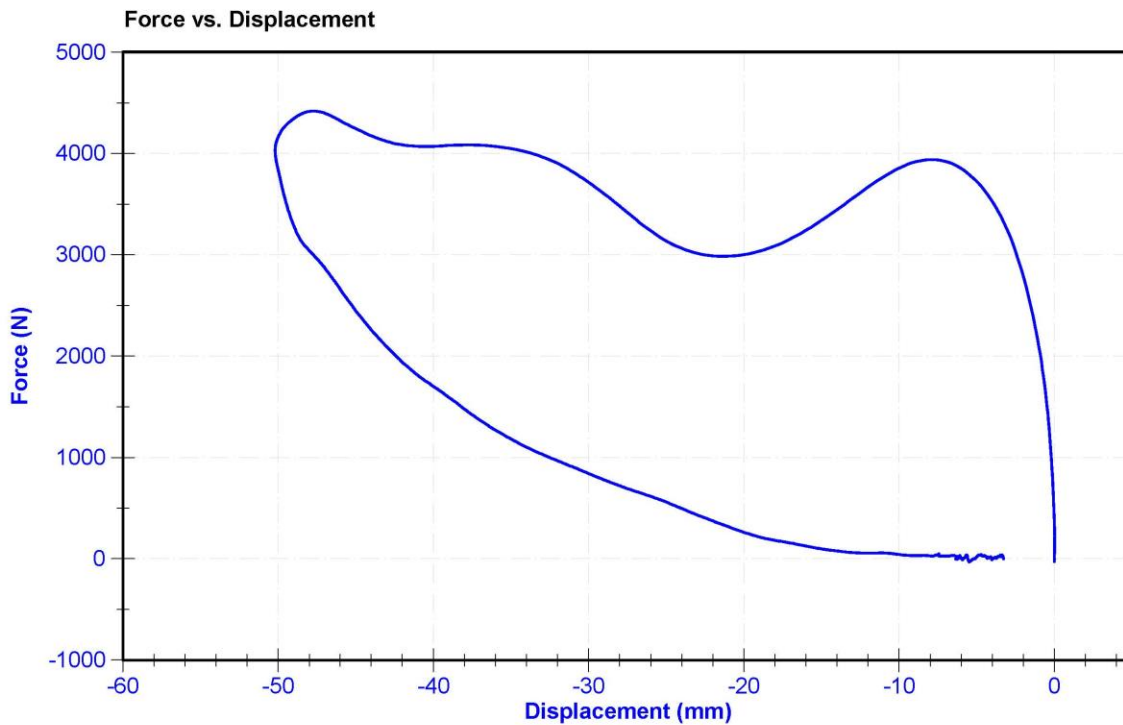


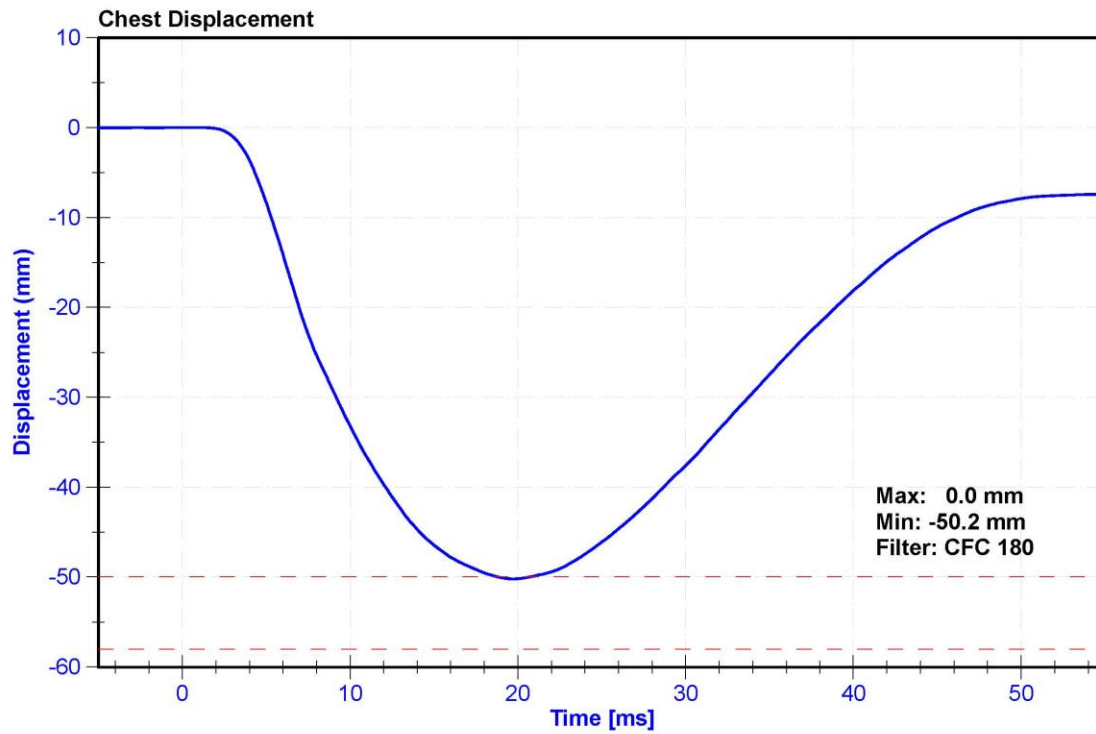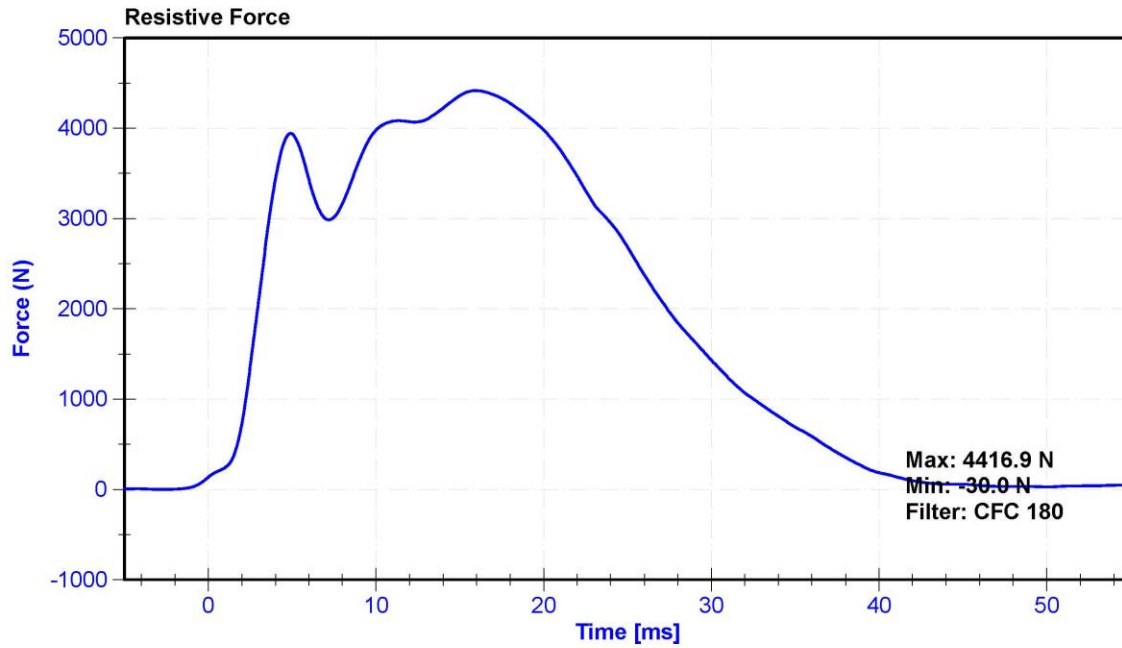

Probe Acceleration

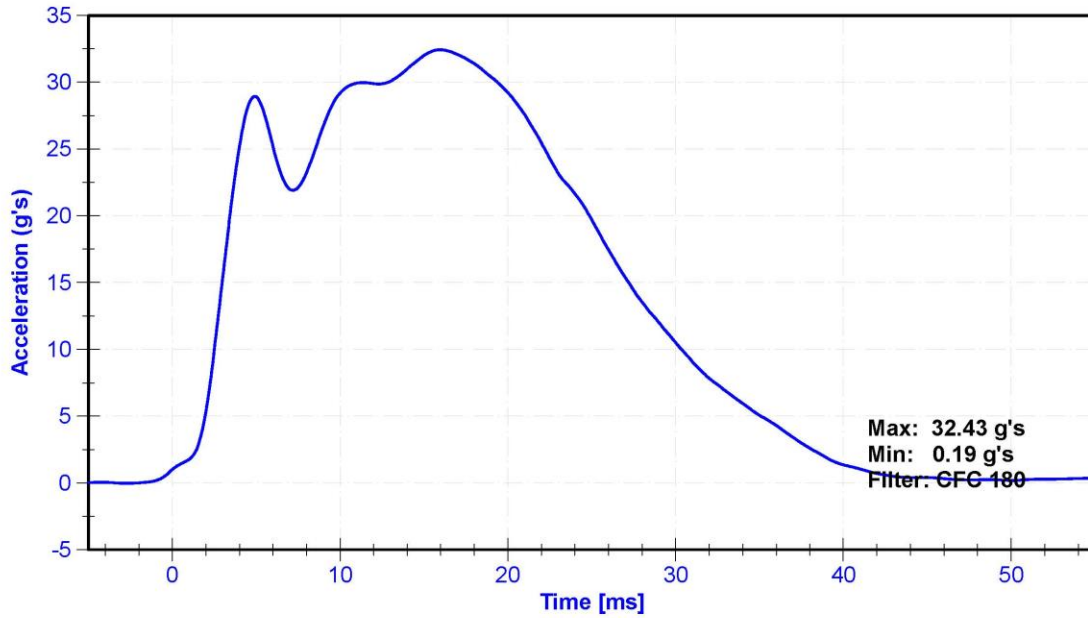

Change in Velocity (Integrated Acceleration)

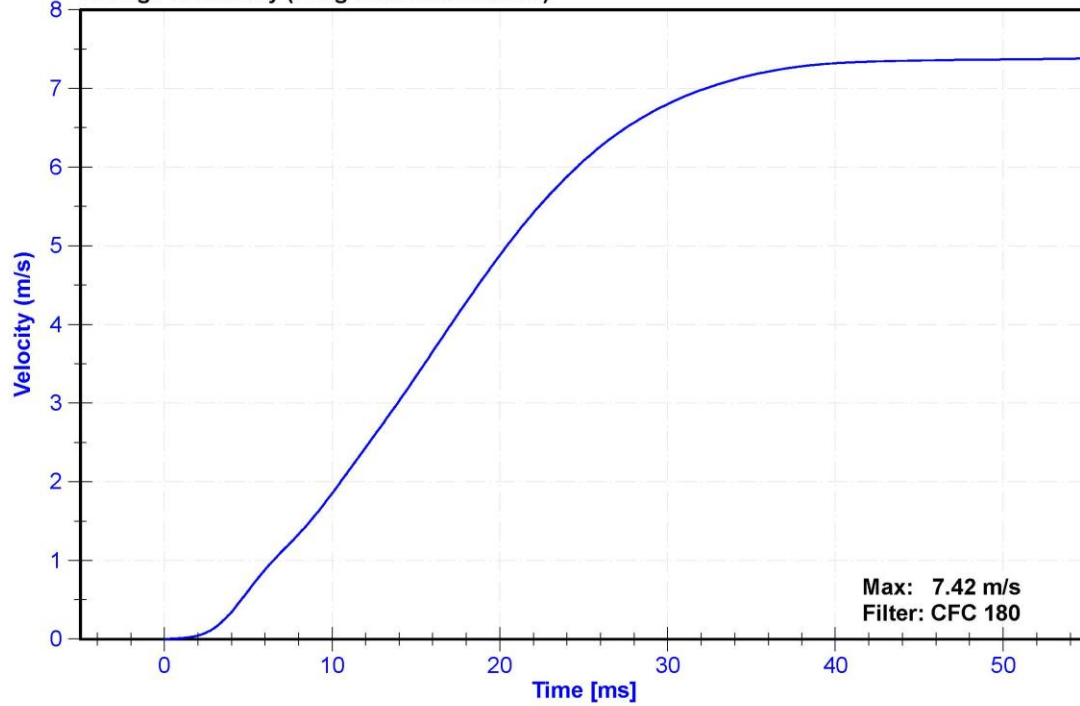



ATD Manufacturer	Humanetics	Test Technician	D. Reinhard
ATD Serial Number	140	Laboratory Supervisor	K. Brogan


**Results**

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	18.6	25.6	°C	20.8	Pass
Humidity	10	70	%	29	Pass
Initial Angle	0	20	deg	17.5	Pass
Force at 45 Degrees	320	390	N	321.8	Pass
Return Angle Relative to Initial	0	8	deg	5.3	Pass

**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Potentiometer	Seika.de N4C-1	DS-13051548	10/12/2021	10/12/2022
Load Cell	Interface SML-200	LC-493319	10/8/2020	10/8/2021

**Force vs. Displacement**

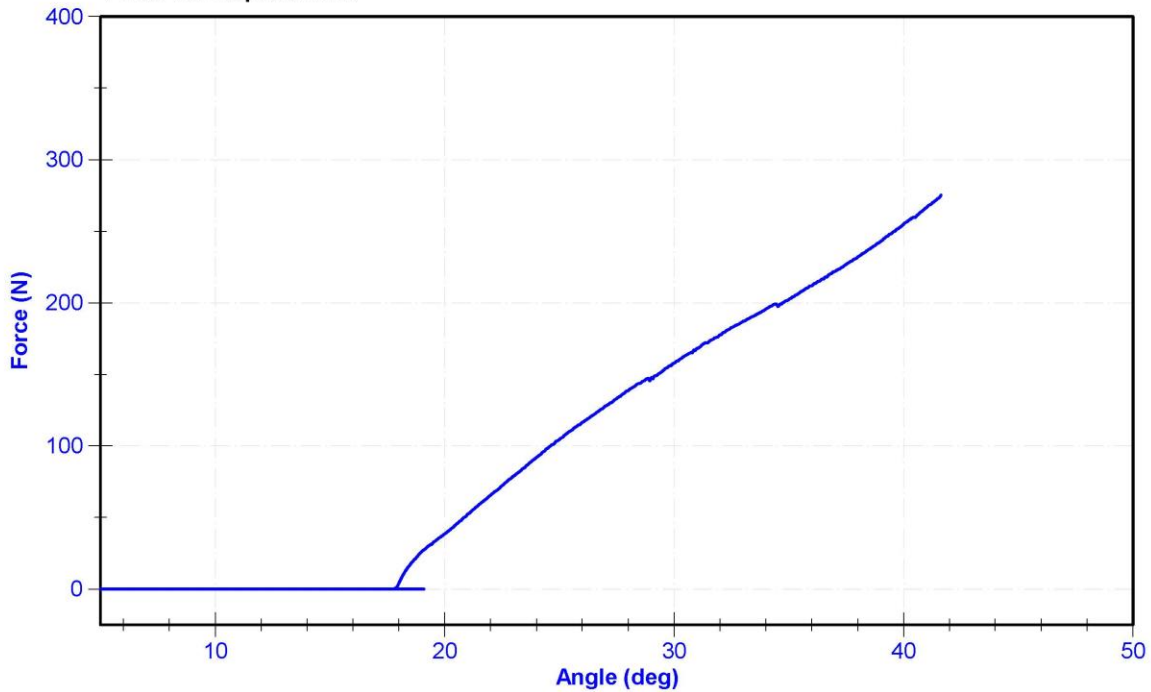


ATD Manufacturer	Denton	Test Technician	D.Reinhard
ATD Serial Number	140	Laboratory Supervisor	K. Brogan



**Results**

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	18.9	25.6	°C	20.9	Pass
Humidity	10	70	%	29.0	Pass
Velocity	2.07	2.13	m/s	2.106	Pass
Resistive Force	3450	4060	N	3847.2	Pass

**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	MSI 64C-2000	A279031	5/8/2020	5/8/2021

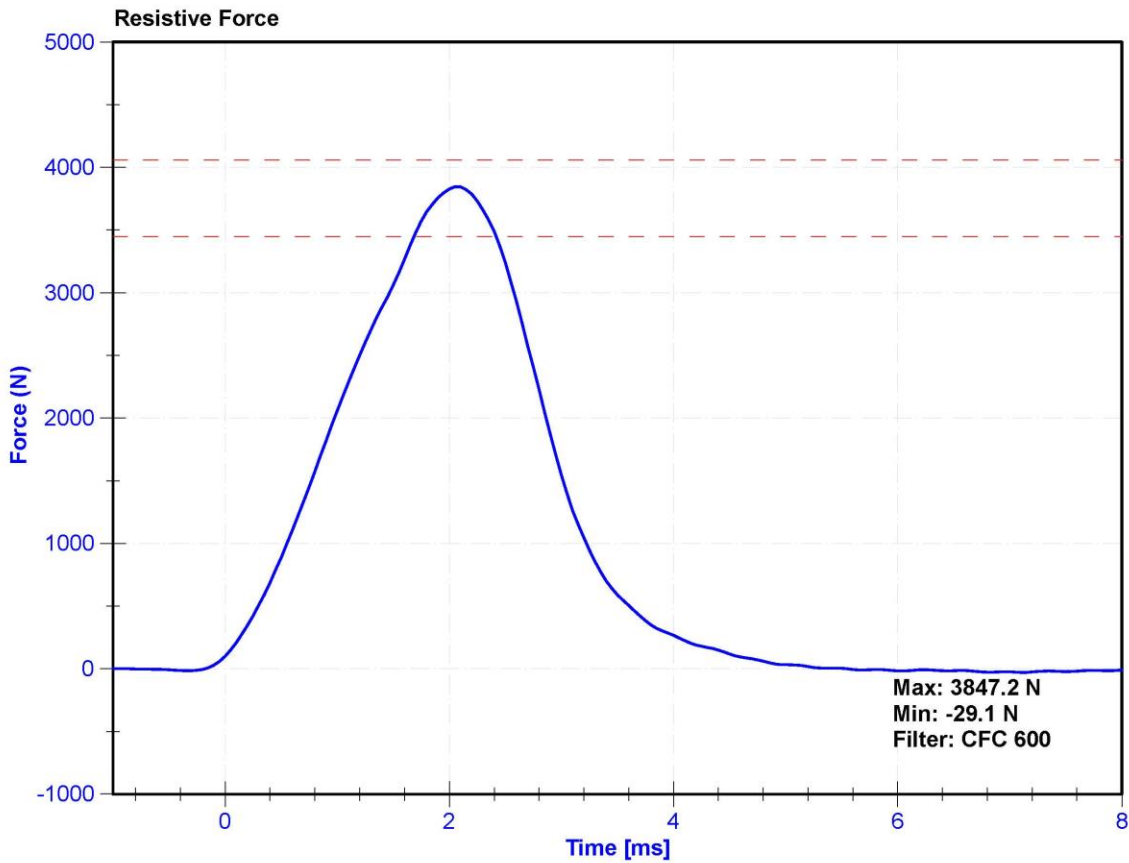

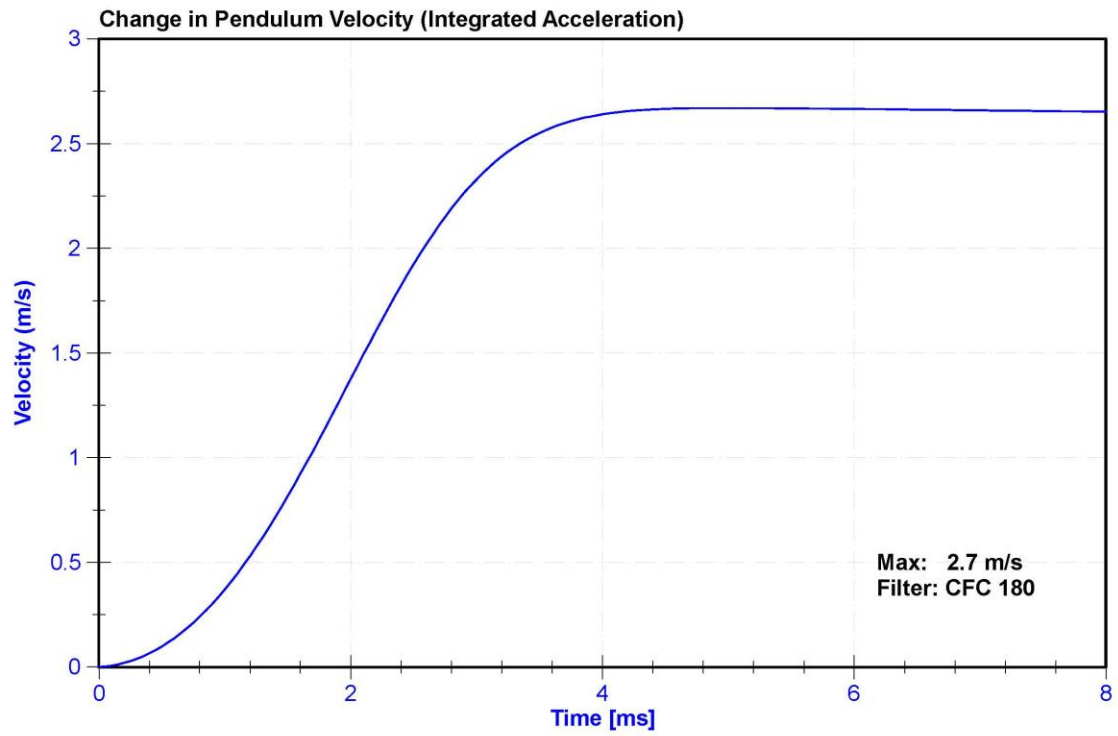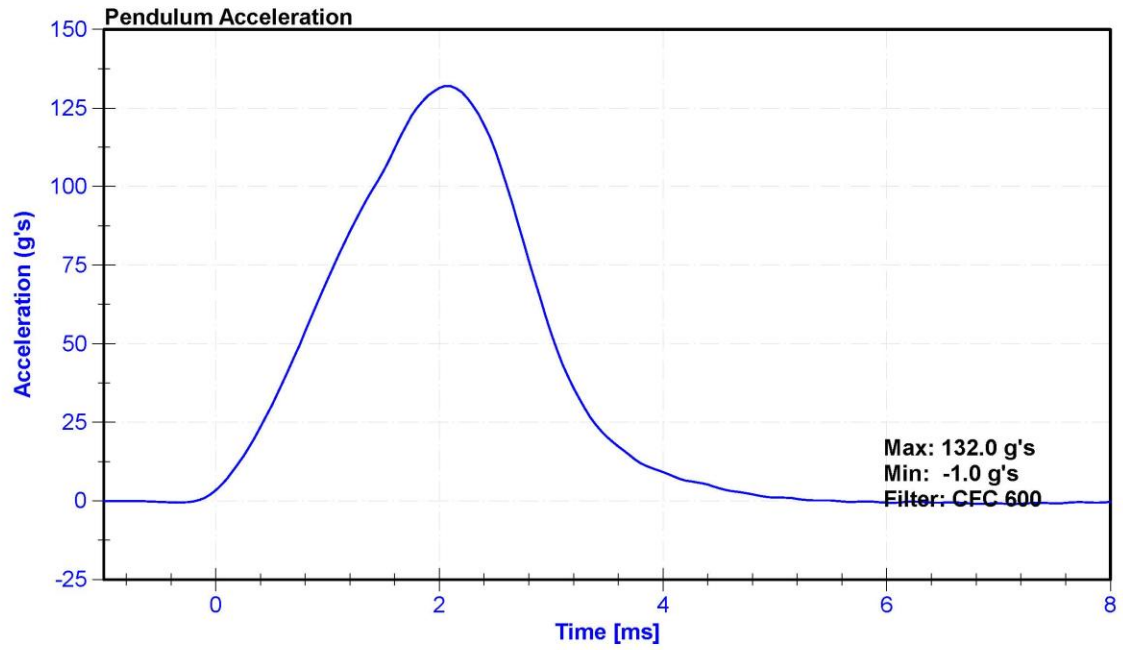


ATD Manufacturer	Denton	Test Technician	D.Reinhard
ATD Serial Number	140	Laboratory Supervisor	K. Brogan



**Results**

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	18.9	25.6	°C	20.9	Pass
Humidity	10	70	%	29.0	Pass
Velocity	2.07	2.13	m/s	2.104	Pass
Resistive Force	3450	4060	N	3556.1	Pass

**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	MSI 64C-2000	A279031	5/8/2020	5/8/2021

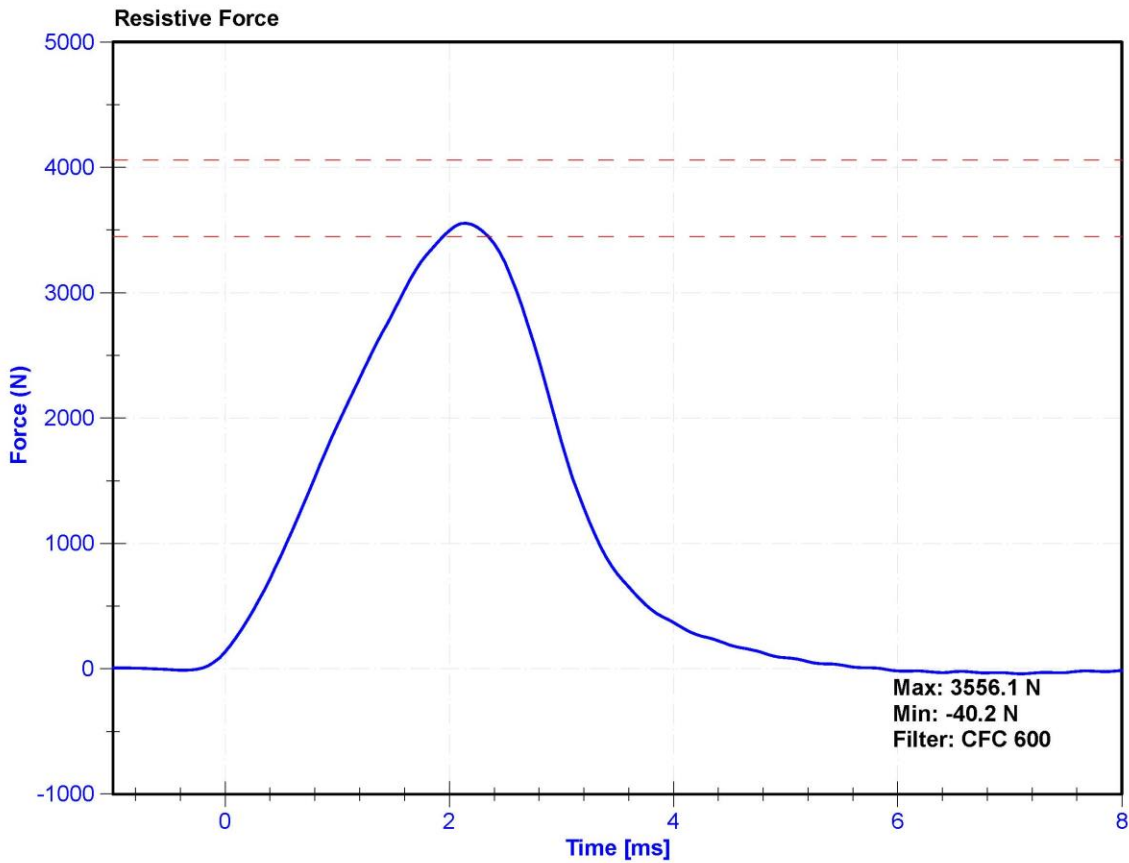

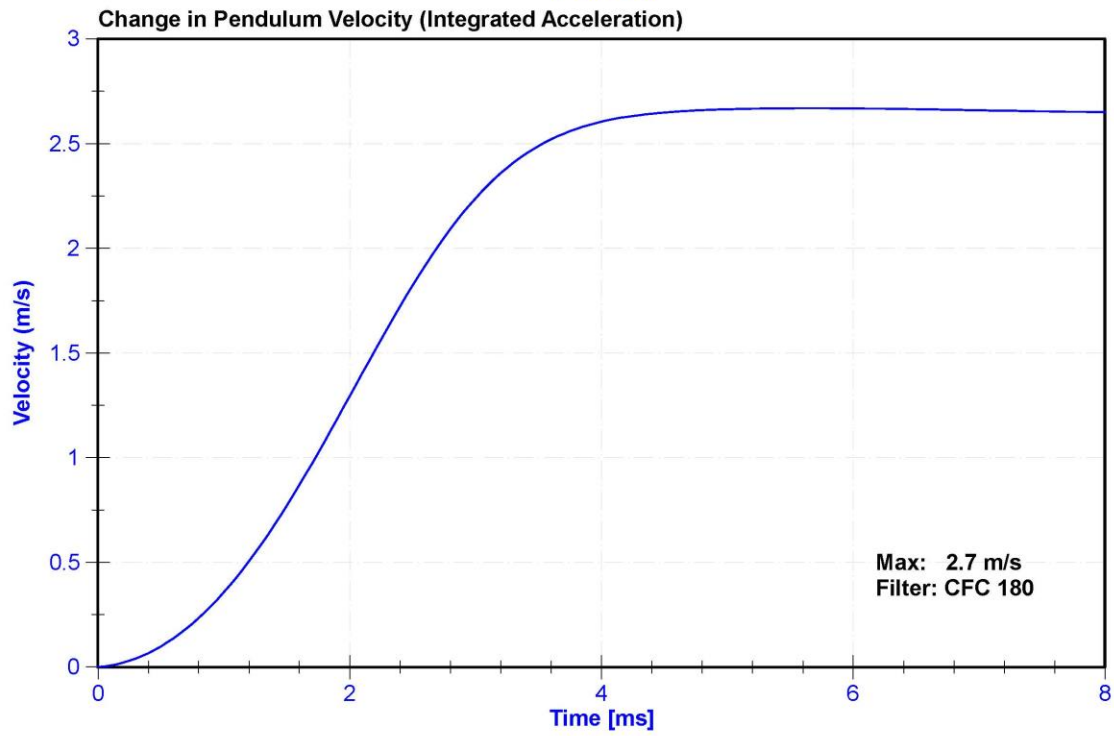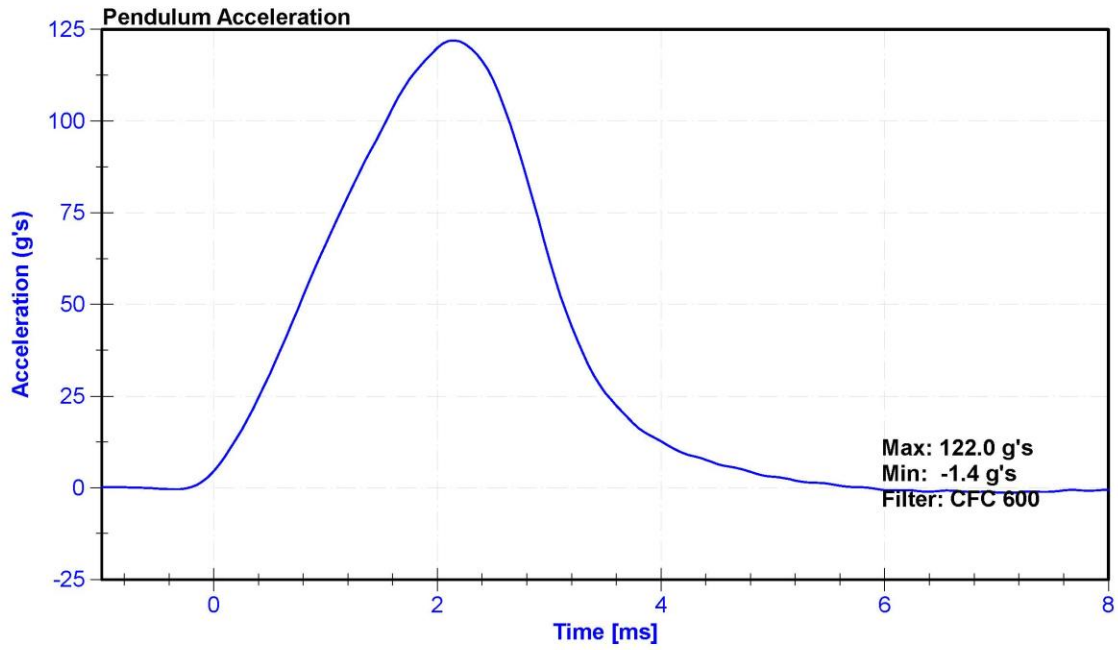

## APPENDIX D

### DUMMY CALIBRATION AND PERFORMANCE VERIFICATION DATA

**Table 1 – Driver Dummy Instrumentation**

Instrumentation		Axis/Location	Hybrid III 50 <sup>th</sup> S/N: 142		
			Serial Number	Manufacturer	Calibration Date
Head Accelerometers	Primary	X	P79417	ENDEVCO	9/22/2020
		Y	P83335	ENDEVCO	9/22/2020
		Z	T11252	ENDEVCO	9/22/2020
	Redundant	X	P52008	ENDEVCO	9/22/2020
		Y	P52045	ENDEVCO	9/22/2020
		Z	P63845	ENDEVCO	9/22/2020
Head Angular Rate Sensors		X	ARS-7553 GFE	DTS ARS PRO-18K	2/21/2020
		Y	ARS-14909GFE	DTS ARS PRO-18K	2/21/2020
		Z	ARS-14908GFE	DTS ARS PRO-18K	2/21/2020
Upper Neck Load Cell		FX, Fy, Fz MX,MY, MZ	LC-1916Fx	Denton	11/23/2020
Chest Accelerometers	Primary	X	T21142	ENDEVCO	9/22/2020
		Y	P83346	ENDEVCO	9/22/2020
		Z	P49190	ENDEVCO	9/22/2020
	Redundant	X	P58794	ENDEVCO	9/22/2020
		Y	P58775	ENDEVCO	9/22/2020
		Z	T11253	ENDEVCO	9/22/2020
Chest Potentiometer		X	DS-140GFE	SERVO	11/17/2020
Pelvis Accelerometer		X	P58735	ENDEVCO	9/22/2020
		Y	P51285	ENDEVCO	9/22/2020
		Z	P82756	ENDEVCO	9/22/2020
Femur Load Cells - Left	Primary	Z	LC-140Fz1	DENTON	7/9/2020
	Redundant	Z	LC-140Fz2	DENTON	7/9/2020
Femur Load Cells - Right	Primary	Z	LC-124Fz1	DENTON	11/23/2020
	Redundant	Z	LC-124Fz2	DENTON	11/23/2020
Tibia Load Cells - Left	Upper	MX, MY, FZ	LC-404Fz	DENTON	11/20/2020
	Lower	MX, MY, FZ	LC-398Fz	DENTON	11/20/2020
Tibia Load Cells – Right	Upper	MX, MY, FZ	LC-364Fz	DENTON	11/20/2020
	Lower	MX, MY, FZ	LC-396Fz	DENTON	11/20/2020
Foot Accelerometers - Left	Rear	X	AC-P78959	ENDEVCO	11/6/2020
	Front	Z	AC-P83418	ENDEVCO	11/6/2020
Foot Accelerometers - Right	Rear	X	P83428	ENDEVCO	11/20/2020
	Front	Z	AC-P80265	ENDEVCO	11/6/2020
Seat belt Load Cells	Lap		NA	NA	NA
	Shoulder		NA	NA	NA

**Table 2 – Front Passenger Dummy Instrumentation**

Instrumentation		Axis/Location	Hybrid III 5 <sup>th</sup> S/N: 140		
			Serial Number	Manufacturer	Calibration Date
Head Accelerometers	Primary	X	P79417	ENDEVCO	9/22/2020
		Y	P83335	ENDEVCO	9/22/2020
		Z	T11252	ENDEVCO	9/22/2020
	Redundant	X	P52008	ENDEVCO	9/22/2020
		Y	P52045	ENDEVCO	9/22/2020
		Z	P63845	ENDEVCO	9/22/2020
Head Angular Rate Sensors		X	ARS-7553 GFE	DTS ARS PRO-18K	2/21/2020
		Y	ARS-14909GFE	DTS ARS PRO-18K	2/21/2020
		Z	ARS-14908GFE	DTS ARS PRO-18K	2/21/2020
Upper Neck Load Cell		FX, Fy, Fz MX,MY, MZ	LC-1916Fx	DENTON	11/23/2020
Chest Accelerometers	Primary	X	T21142	ENDEVCO	9/22/2020
		Y	P83346	ENDEVCO	9/22/2020
		Z	P49190	ENDEVCO	9/22/2020
	Redundant	X	P58794	ENDEVCO	9/22/2020
		Y	P58775	ENDEVCO	9/22/2020
		Z	T11253	ENDEVCO	9/22/2020
Chest Potentiometer		X	DS-140GFE	SERVO	11/17/2020
Pelvis Accelerometer		X	P58735	ENDEVCO	9/22/2020
		Y	P51285	ENDEVCO	9/22/2020
		Z	P82756	ENDEVCO	9/22/2020
Femur Load Cells - Left	Primary	Z	LC-140Fz1	DENTON	7/9/2020
	Redundant	Z	LC-140Fz2	DENTON	7/9/2020
Femur Load Cells - Right	Primary	Z	LC-124Fz1	DENTON	11/23/2020
	Redundant	Z	LC-124Fz2	DENTON	11/23/2020
Tibia Load Cells - Left	Upper	MX, MY, FZ	LC-404Fz	DENTON	11/20/2020
	Lower	MX, MY, FZ	LC-398Fz	DENTON	11/20/2020
Tibia Load Cells – Right	Upper	MX, MY, FZ	LC-364Fz	DENTON	11/20/2020
	Lower	MX, MY, FZ	LC-396Fz	DENTON	11/20/2020
Foot Accelerometers - Left	Rear	X	AC-P78959	ENDEVCO	11/6/2020
	Front	Z	AC-P83418	ENDEVCO	11/6/2020
Foot Accelerometers - Right	Rear	X	P83428	ENDEVCO	11/20/2020
	Front	Z	AC-P80265	ENDEVCO	11/6/2020
Seat belt Load Cells	Lap		NA	NA	NA
	Shoulder		NA	NA	NA

**Table 3 – Vehicle Instrumentation**

Instrumentation			Axis	Serial Number	Manufacturer	Calibration Date
Crossmember/Rear Seat Accelerometers	Left	Primary	X	A350934	MSI	9/25/2020
			Z	A350994	MSI	9/28/2020
		Redundant	X	A350975	MSI	9/25/2020
	Right	Primary	X	A247197	MSI	10/19/2020
			Z	A280939	MSI	7/24/2020
		Redundant	X	A280917	MSI	7/24/2020
Engine Accelerometers	Top		X	A315864	MSI	10/19/2020
	Bottom		X	A290916	MSI	10/6/2020