

**NEW CAR ASSESSMENT PROGRAM
LANE DEPARTURE WARNING CONFIRMATION TEST
NCAP-DRI-LDW-21-08**

2021 Kia K5 EX

DYNAMIC RESEARCH, INC.

355 Van Ness Avenue, STE 200
Torrance, California 90501



11 March 2021

Final Report

Prepared Under Contract No. DTNH22-14-D-00333

**U.S. DEPARTMENT OF TRANSPORTATION
National Highway Traffic Safety Administration
New Car Assessment Program
1200 New Jersey Avenue, SE
West Building, 4th Floor (NRM-110)
Washington, DC 20590**

Prepared for the Department of Transportation, National Highway Traffic Safety Administration, under Contract No. DTNH22-14-D-00333.

This publication is distributed by the U.S. Department of Transportation, National Highway Traffic Safety Administration, in the interest of information exchange. The opinions, findings, and conclusions expressed in this publication are those of the author(s) and not necessarily those of the Department of Transportation or the National Highway Traffic Safety Administration. The United States Government assumes no liability for its contents or use thereof. If trade or manufacturer's names or products are mentioned, it is only because they are considered essential to the object of the publication and should not be construed as an endorsement. The United States Government does not endorse products of manufacturers.

Prepared By: J. Lenkeit and N. Watanabe

Program Manager

Test Engineer

Date: 11 March 2021

1. Report No. NCAP-DRI-LDW-21-08	2. Government Accession No.	3. Recipient's Catalog No.	
4. Title and Subtitle Final Report of Lane Departure Warning Confirmation Test of a 2021 Kia K5 EX.		5. Report Date 11 March 2021	
		6. Performing Organization Code DRI	
7. Author(s) J. Lenkeit, Program Manager N. Watanabe, Test Engineer		8. Performing Organization Report No. DRI-TM-20-182	
9. Performing Organization Name and Address Dynamic Research, Inc. 355 Van Ness Ave, STE 200 Torrance, CA 90501		10. Work Unit No.	
		11. Contract or Grant No. DTNH22-14-D-00333	
12. Sponsoring Agency Name and Address U.S. Department of Transportation National Highway Traffic Safety Administration New Car Assessment Program 1200 New Jersey Avenue, SE, West Building, 4th Floor (NRM-110) Washington, DC 20590		13. Type of Report and Period Covered Final Test Report February - March 2021	
		14. Sponsoring Agency Code NRM-110	
15. Supplementary Notes			
16. Abstract These tests were conducted on the subject 2021 Kia K5 EX in accordance with the specifications of the New Car Assessment Program's (NCAP) most current Test Procedure in docket NHTSA-2006-26555-0135 to confirm the performance of a Lane Departure Warning system. The vehicle passed the requirements of the test for all three lane marking types and for both directions			
17. Key Words Lane Departure Warning, LDW, New Car Assessment Program, NCAP		18. Distribution Statement Copies of this report are available from the following: NHTSA Technical Reference Division National Highway Traffic Safety Administration 1200 New Jersey Avenue, SE Washington, DC 20590	
19. Security Classif. (of this report) Unclassified	20. Security Classif. (of this page) Unclassified	21. No. of Pages 145	22. Price

TABLE OF CONTENTS

<u>SECTION</u>	<u>PAGE</u>
I. INTRODUCTION	1
II. DATA SHEETS	2
Data Sheet 1: Test Results Summary	3
Data Sheet 2: Vehicle Data	4
Data Sheet 3: Test Conditions	5
Data Sheet 4: Lane Departure Warning System Operation	7
III. TEST PROCEDURES	10
A. Test Procedure Overview	10
B. Lane Delineation Markings	11
C. Test Validity	13
D. Pass/Fail Criteria	14
E. Instrumentation	14
APPENDIX A Photographs	A-1
APPENDIX B Excerpts from Owner's Manual	B-1
APPENDIX C Run Log	C-1
APPENDIX D Time Histories	D-1

Section I

INTRODUCTION

The purpose of the testing reported herein was to confirm the performance of a Lane Departure Warning (LDW) system installed on a 2021 Kia K5 EX. The LDW system for this vehicle provides both visual and auditory alerts. The vehicle passed the requirements of the test for all three lane marking types and for both directions

The test procedure is described in detail in the National Highway Traffic Safety Administration (NHTSA) document "LANE DEPARTURE WARNING SYSTEM CONFIRMATION TEST" dated February of 2013 (Docket No. NHTSA-2006-26555-0135). Its purpose is to confirm the performance of LDW systems installed on light vehicles with gross vehicle weight ratings (GVWR) of up to 10,000 lbs. Current LDW technology relies on sensors to recognize a lane delimiting edge line. As such, the test procedures described in the document rely on painted lines, taped lines, or Botts Dots being present on the test course to emulate those found on public roadways. Although it is impossible to predict what technologies could be used by future LDW systems (e.g., magnetic markers, RADAR reflective striping, ultra violet paint, infrared, etc.), it is believed that minor modifications to these procedures, when deemed appropriate, could be used to accommodate the evaluation of alternative or more advanced LDW systems.

Section II
DATA SHEETS

LANE DEPARTURE WARNING
DATA SHEET 1: TEST RESULTS SUMMARY

(Page 1 of 1)

2021 Kia K5 EX

VIN: 5XXG34J2XMG00xxxx

Test Date: 2/17/2021

Lane Departure Warning setting: Lane Safety - Warning Only
Warning Timing - Normal

Test 1 – Continuous White Line Left: Pass Right: Pass

Test 2 – Dashed Yellow Line Left: Pass Right: Pass

Test 3 – Botts Dots Left: Pass Right: Pass

Overall: Pass

Notes:

LANE DEPARTURE WARNING
DATA SHEET 2: VEHICLE DATA

(Page 1 of 1)

2021 Kia K5 EX

TEST VEHICLE INFORMATION

VIN: 5XXG34J2XMG00xxxx

Body Style: Sedan

Color: Ebony Black

Date Received: 2/8/2021

Odometer Reading: 38 mi

DATA FROM VEHICLE'S CERTIFICATON LABEL

Vehicle manufactured by: Kia Motors Manufacturing Georgia, Inc.

Date of manufacture: JUL/14/20

Vehicle Type: Passenger Car

DATA FROM TIRE PLACARD

Tires size as stated on Tire Placard: Front: 235/45R18

Rear: 235/45R18

Recommended cold tire pressure: Front: 240 kPa (35 psi)

Rear: 240 kPa (35 psi)

TIRES

Tire manufacturer and model: Pirelli P-Zero All Season

Front tire size: 235/45R18 94V

Rear tire size: 235/45R18 94V

Front tire DOT prefix: 1UN WB459E

Rear tire DOT prefix: 1UN WB459E

LANE DEPARTURE WARNING
DATA SHEET 3: TEST CONDITIONS

(Page 1 of 2)

2021 Kia K5 EX

GENERAL INFORMATION

Test date: 2/17/2021

AMBIENT CONDITIONS

Air temperature: 12.8 C (55 F)

Wind speed: 6.2 m/s (13.8 mph)

- X Wind speed ≤ 10 m/s (22 mph)
- X Tests were not performed during periods of inclement weather. This includes, but is not limited to, rain, snow, hail, fog, smoke, or ash.
- X Tests were conducted during daylight hours with good atmospheric visibility (defined as an absence of fog and the ability to see clearly for more than 5000 meters). The tests were not conducted with the vehicle oriented into the sun during very low sun angle conditions, where the sun is oriented 15 degrees or less from horizontal, and camera "washout" or system inoperability results.

VEHICLE PREPARATION

Verify the following:

All non-consumable fluids at 100% capacity: X

Fuel tank is full: X

Tire pressures are set to manufacturer's recommended cold tire pressure: X

Front: 240 kPa (35 psi)

Rear: 240 kPa (35 psi)

LANE DEPARTURE WARNING
DATA SHEET 3: TEST CONDITIONS

(Page 2 of 2)

2021 Kia K5 EX

WEIGHT

Weight of vehicle as tested including driver and instrumentation

Left Front: 494.9 kg (1091 lb)

Right Front: 465.4 kg (1026 lb)

Left Rear: 334.8 kg (738 lb)

Right Rear: 332.9 kg (734 lb)

Total: 1628.0 kg (3589 lb)

LANE DEPARTURE WARNING
DATA SHEET 4: LANE DEPARTURE WARNING SYSTEM OPERATION

(Page 1 of 3)

2021 Kia K5 EX

Name of the LDW option, option package, etc.:

Lane Keep Assist, standard equipment

Type and location of sensor(s) used:

Camera, located near the rearview mirror

Lane Departure Warning Setting used in test:

Lane Safety - Warning Only

Warning Timing - Normal

How is the Lane Departure Warning presented to the driver? Warning light
(Check all that apply) Buzzer or audible alarm
 Vibration
 Other _____

Describe the method by which the driver is alerted. For example, if the warning is a light, where is it located, its color, size, words or symbol, does it flash on and off, etc. If it is a sound, describe if it is a constant beep or a repeated beep. If it is a vibration, describe where it is felt (e.g., pedals, steering wheel), the dominant frequency, (and possibly magnitude), the type of warning (light, audible, vibration, or combination), etc.

When the LDW system is turned on, a small indicator in the center of the instrument cluster appears in white. At 45 mph and above, when lane markings are detected, the symbol changes to green. When lane departure is detected, the green indicator flashes on and off. See Appendix A, Figure A11.

The auditory warning is a pulsed 760 Hz tone.

LANE DEPARTURE WARNING

DATA SHEET 4: LANE DEPARTURE WARNING SYSTEM OPERATION

(Page 2 of 3)

2021 Kia K5 EX

Is the vehicle equipped with a switch whose purpose is to render LDW inoperable? Yes
 No

If yes, please provide a full description including the switch location and method of operation, any associated instrument panel indicator, etc.

The system can be disabled in two ways. A switch to the left of the steering column can be used to turn the system on or off. See Appendix A, Figure A12. The system can also be disabled using the system menus in the center display. The menu hierarchy is:

Setup

Vehicle Settings

Driver Assistance

Lane Safety.

Toggle Off or On.

See Appendix A, Figures A9 and A10.

Is the vehicle equipped with a control whose purpose is to adjust the range setting or otherwise influence the operation of LDW? Yes
 No

If yes, please provide a full description.

The timing can be adjusted using the menus in the center display. The menu hierarchy is:

Setup

Vehicle Settings

Driver Assistance

Warning Timing

Select Normal or Late

See Appendix A, Figures A9 and A10.

LANE DEPARTURE WARNING

DATA SHEET 4: LANE DEPARTURE WARNING SYSTEM OPERATION

(Page 3 of 3)

2021 Kia K5 EX

Are there other driving modes or conditions that render LDW inoperable or reduce its effectiveness? Yes
 No

If yes, please provide a full description.

Limitations of the system are described on pages 5-95 through 5-97 of the Owner's Manual, shown in pages B-10 through B-12 of Appendix B.

Notes:

Section III

TEST PROCEDURES

A. Test Procedure Overview

Each LDW test involved one of three lane marking types: solid white lines, dashed yellow lines, or Botts Dots. Lane departures were done both to the left and to the right, and each test condition was repeated five times, as shown in Table 1.

Table 1. LDW Test Matrix

Lane Geometry	Line Type	Departure Direction	Number of Trials
Straight	Solid	L	5
		R	5
	Dashed	L	5
		R	5
	Botts Dots	L	5
		R	5

Prior to the start of a test series involving a given lane marking type and departure direction combination, the accuracy of the distance to lane marking measurement was verified. This was accomplished by driving the vehicle to the approximate location at which the lane departure would occur and placing the tire at the lane marking edge of interest (i.e., distance to lane marking = 0). The real-time display of distance to the lane marking was then observed to verify that the measured distance was within the tolerance (5 cm). If the measured distance was found to be greater than the tolerance, the instrumentation setup was checked and corrected, if necessary. If the measured distance was found to be within the tolerance, the instrumentation setup was considered appropriate and the test series was begun.

To begin the maneuver, the vehicle was accelerated from rest to a test speed of 72.4 km/h (45 mph), while being driven in a straight line parallel to the lane marking of interest, with the centerline of the vehicle approximately 1.83 m (6.0 ft) from the lane edge (i.e., such that the vehicle would pass through the center of the start gate). The test speed was achieved at least 60 m (200 ft) before the start gate was reached. Striking any start gate cones was not permitted, and any run in which a cone was struck was considered to be invalid. Also, during the initialization and test phases, the test driver avoided using turn signals and avoided applying any sudden acceleration, sudden steering, or sudden braking, and any use of the turn signals, sudden acceleration, sudden steering, or sudden braking invalidated the test trial.

Data collection began with the vehicle at least 60 m (200 ft) from the start gate, which was configured using a pair of non-reflective, low-contrast color traffic cones. A second set of cones, placed 6 m (20 ft) longitudinally before the start gate, was used to guide the driver into the start gate. The lateral width between the cone pairs was 20 cm (8 in) greater than the width of the vehicle, and the centerline of each pair was laterally offset from the lane marking by 1.8 m (6 ft).

Once the driver passed the gate, the driver manually input sufficient steering to achieve a lane departure with a target lateral velocity of 0.5 m/s with respect to the lane line. As shown in Figure 1, two additional non-reflective cones were used to guide the driver in making this steering maneuver. Throughout the maneuver, the driver modulated the throttle or used cruise control, as appropriate, such that vehicle speed remained at constant speed. The test was considered complete when the vehicle crossed at least 1 m (3.3 ft) over the lane edge boundary.

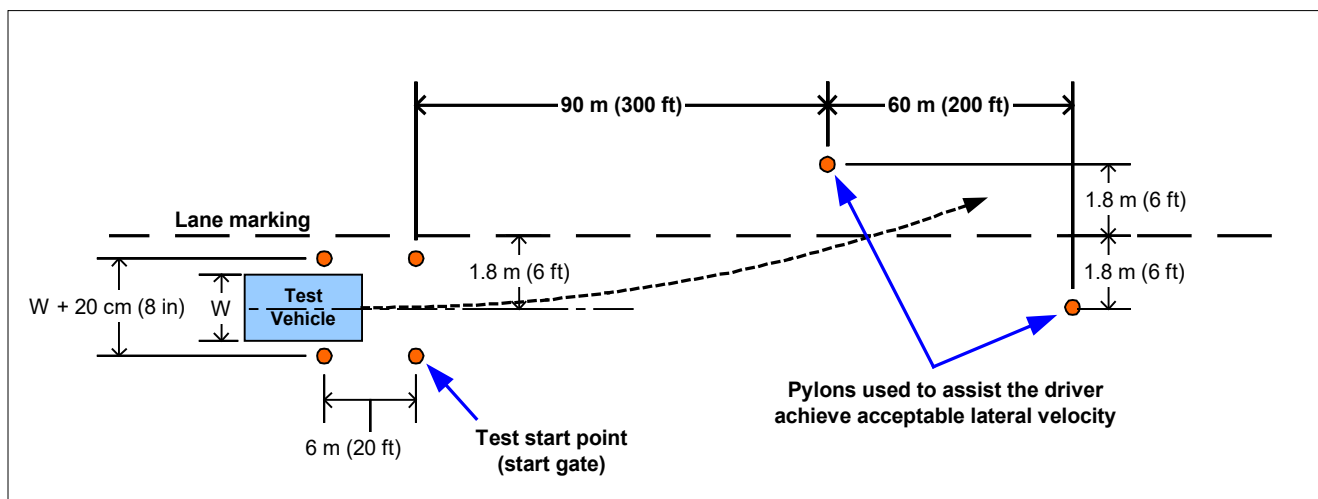


Figure 1. Position of Cones Used to Assist Driver

Data collected included vehicle speed, position, and yaw rate. In addition to cone strikes, vehicle speed and yaw rate data were used to identify invalid runs as described in Section C below. Data from trials where speed or yaw rate were outside of the performance specification were not considered valid.

B. Lane Delineation Markings

The New Car Assessment Program's Test Procedure for the confirmation of a Lane Departure Warning system contains a requirement that all lane markings meet United States Department of Transportation (USDOT) specifications as described in the Manual on Uniform Traffic Control Devices (MUTCD) and be considered in "very good condition".

1. Lane Marker Width

The width of the edge line marker was 10 to 15 cm (4 to 6 in). This is considered to be a normal width for longitudinal pavement markings under Section 3A.05 of the MUTCD.

2. Line Marking Color and Reflectivity

Lane marker color and reflectivity met all applicable standards. These standards include those from the International Commission of Illumination (CIE) for color and the American Society for Testing and Materials (ASTM) on lane marker reflectance.

3. Line Styles

The tests described in this document required the use of three lane line configurations: continuous solid white, discontinuous dashed yellow, and discontinuous with raised pavement markers.

- Continuous White Line

A continuous white line is defined as a white line that runs for the entire length of the test course.

- Dashed Yellow Line

As stated in the MUTCD, and as shown in Figure 2, a discontinuous dashed yellow line is defined as by a series of 3 m (10 ft) broken (dashed) yellow line segments, spaced 9.1 m (30 ft) apart.

- Raised Pavement Marker Line (Botts Dots)

California Standard Plans indicates raised pavement markers are commonly used in lieu of painted strips for marking roads in California. Other states, mainly in the southern part of the United States, rely on them as well. These markers may be white or yellow, depending on the specific application, following the same basic colors of their analogous white and yellow painted lines. Following the California 2006 Standard Plans, three types of raised pavement markings are used to form roadway lines. It is believed that these types of roadway markings are the hardest for an LDW sensor system to process. Type A and Type AY are non-reflective circular domes that are approximately 10 cm (4 in) in diameter and approximately 1.8 cm (0.7 in) high. Type C and D are square markings that are retro reflective in two directions measuring approximately 10 x 10 x 5 cm (4 x 4 x 0.5 in), and Type G and H that are the same as C and D only retro reflective in a single direction.

For the tests described in this document, raised pavement markers were set up following California Standard Plan A20A, Detail 4, as shown in Figure 3. Note that in this figure, the squares are Type D yellow reflectors and the circles are yellow Type AY discs.

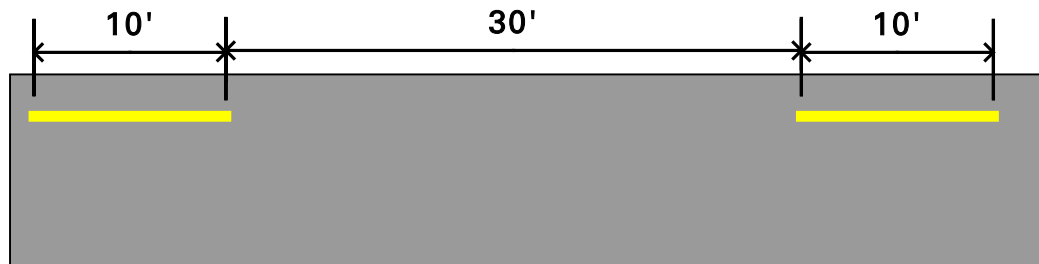


Figure 2. MUTCD Discontinuous Dashed Line Specifications

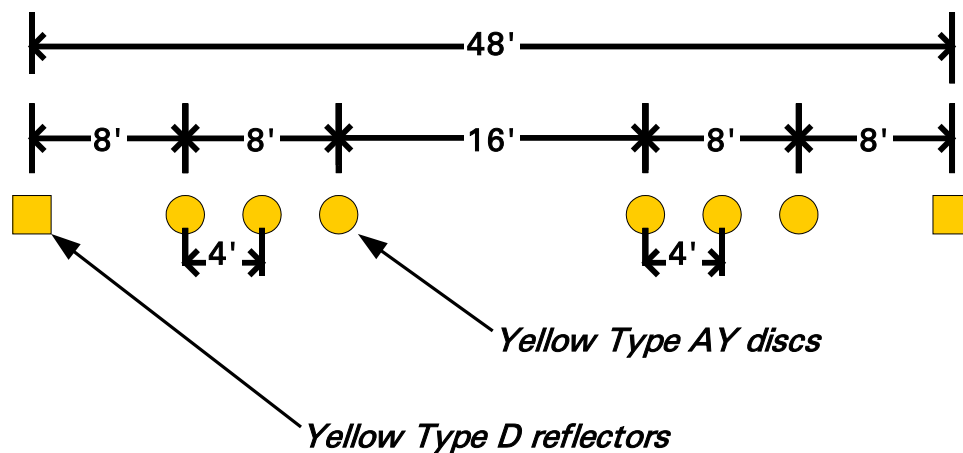


Figure 3. California Standard Plan A20A, Detail 4

C. Test Validity

1. Speed

All LDW tests were conducted at 72.4 km/h (45 mph). Test speed was monitored and a test was considered valid if the test speed remained within ± 2 km/h (± 1.2 mph) of the 72.4 km/h (45 mph) target speed. It was required that the speed must remain within this window from the start of the test until any part of the vehicle crossed a lane line by 1 m (3.3 ft) or more.

2. Lateral Velocity

All tests were conducted with a lateral velocity of 0.1 to 0.6 m/s (0.3 to 2.0 ft/s), measured with respect to the lane line at the time of the alert. To assist the test driver in being able to efficiently establish the target lateral velocity, cones were positioned in the manner shown in Figure 1.

3. Yaw Rate

It was required that the magnitude of the vehicle's yaw rate could not exceed 1.0 deg/sec at any time during lane departure maneuver, from the time the vehicle passes through the start gate to the instant the vehicle has crossed a lane line by 1 m (3.3 ft).

D. Pass/Fail Criteria

The measured test data were used to determine the pass/fail outcome for each trial. The outcome was based on whether the LDW produced an appropriate alert during the maneuver. In the context of this test procedure, a lane departure is said to occur when any part of the two-dimensional polygon used to represent the test vehicle breaches the inboard lane line edge (i.e., the edge of the line close to the vehicle before the departure occurs). In the case of tests performed in this procedure, the front corner of the polygon, defined as the intersection of the center of the front wheels (longitudinally) with the outboard edge of the front tire (laterally), crossed the line edge first. So, for example, if the vehicle departed its lane to the left, the left front corner of the polygon would first breach the lane line edge.

For an individual trial to be considered a "pass":

- Test speed, lateral velocity, and yaw rate validity conditions must be satisfied.
- The LDW alert must not occur when the lateral position of the vehicle is greater than 0.75 m (2.5 ft) from the lane line edge (i.e., prior to the lane departure).
- The LDW alert must occur before the lane departure exceeds 0.3 m (1.0 ft).

For an overall, "Pass" the LDW system must satisfy the pass criteria for 3 of 5 individual trials for each combination of departure direction and lane line type (60%), and pass 20 of the 30 trials overall (66%).

E. Instrumentation

Table 2 lists the sensors, signal conditioning, and data acquisition equipment used for these tests.

Table 2. Test Instrumentation and Equipment

Type	Output	Range	Accuracy, Other Primary Specs	Mfr, Model	Serial Number	Calibration Dates Last Due
Tire Pressure Gauge	Vehicle Tire Pressure	0-100 psi 0-690 kPa	0.5 psi 3.45 kPa	Ashcroft, D1005PS	17042707002	By: DRI Date: 8/18/2020 Due: 8/18/2021
Platform Scales	Vehicle Total, Wheel, and Axle Load	8000 lb 35.6 kN	±1.0% of applied load	Intercomp, SWII	0410MN20001	By: DRI Date: 4/20/2020 Due: 4/20/2021
Differential Global Positioning System	Position, Velocity	Latitude: ±90 deg Longitude: ±180 deg Altitude: 0-18 km Velocity: 0-1000 knots	Horizontal Position: ±1 cm Vertical Position: ±2 cm Velocity: 0.05 km/h	Trimble GPS Receiver, 5700 (base station and in-vehicle)	00440100989	N/A
Multi-Axis Inertial Sensing System	Position: Longitudinal, Lateral, and Vertical Accels: Lateral, Longitudinal and Vertical Velocities: Roll, Pitch, Yaw Rates: Roll, Pitch, Yaw Angles	Latitude: ±90 deg Longitude: ±180 deg Altitude: 0-18 km Velocity: 0-1000 knots Accel: ±100 m/s ² Angular Rate: ±100 deg/s Angular Disp: ±180 deg	Position: ±2 cm Velocity: 0.05 km/h Accel: ≤ 0.01% of full range Angular Rate: ≤ 0.01% of full range Roll/Pitch Angle: ±0.03 deg Heading Angle: ±0.1 deg	Oxford Technical Solutions (OXTS), Inertial+	2182	By: Oxford Technical Solutions ¹ Date: 9/16/2019 Due: 9/16/2021
Real-Time Calculation of Position and Velocity Relative to Lane Markings	Distance and velocity to lane markings	Lateral Lane Dist: ±30 m Lateral Lane Velocity: ±20 m/sec	Lateral Distance to Lane Marking: ±2 cm Lateral Velocity to Lane Marking: ±0.02m/sec	Oxford Technical Solutions (OXTS), RT-Range	97	N/A

¹ Oxford Technical Solutions recommends calibration every two years.

Type	Output	Range	Accuracy, Other Primary Specs	Mfr, Model	Serial Number	Calibration Dates Last Due
Microphone	Sound (to measure time at alert)	Frequency Response: 80 Hz – 20 kHz	Signal-to-noise: 64 dB, 1 kHz at 1 Pa	Audio-Technica AT899	N/A	N/A
Light Sensor	Light intensity (to measure time at alert)	Spectral Bandwidth: 440-800 nm	Rise time < 10 msec	DRI designed and developed Light Sensor	N/A	N/A
Coordinate Measurement Machine	Inertial Sensing System Coordinates	0-8 ft 0-2.4 m	±.0020 in. ±.051 mm (Single point articulation accuracy)	Faro Arm, Fusion	UO8-05-08-06636	By: DRI Date: 1/6/2021 Due: 1/6/2022
Type	Description			Mfr, Model	Serial Number	
Data Acquisition System	Data acquisition is achieved using a dSPACE MicroAutoBox II Data from the Oxford IMU, including Longitudinal, Lateral, and Vertical Acceleration, Roll, Yaw, and Pitch Rate, Forward and Lateral Velocity, Roll and Pitch Angle are sent over Ethernet to the MicroAutoBox. The Oxford IMUs are calibrated per the manufacturer's recommended schedule (listed above).			D-Space Micro-Autobox II 1401/1513		
				Base Board	549068	
				I/O Board	588523	

For systems that implement audible or haptic alerts, part of the pre-test instrumentation verification process is to determine the tonal frequency of the audible warning or the vibration frequency of the tactile warning through use of the PSD (Power Spectral Density) function in Matlab. This is accomplished in order to identify the center frequency around which a band-pass filter is applied to subsequent audible or tactile warning data so that the beginning of such warnings can be programmatically determined. The band-pass filter used for these warning signal types is a phaseless, forward-reverse pass, elliptical (Cauer) digital filter, with filter parameters as listed in Table 3.

Table 3. Audible and Tactile Warning Filter Parameters

Warning Type	Filter Order	Peak-to-Peak Ripple	Minimum Stop Band Attenuation	Passband Frequency Range
Audible	5 th	3 dB	60 dB	Identified Center Frequency \pm 5%
Tactile	5 th	3 dB	60 dB	Identified Center Frequency \pm 20%

APPENDIX A

Photographs

LIST OF FIGURES

	Page
Figure A1. Front View of Subject Vehicle.....	A-3
Figure A2. Rear View of Subject Vehicle	A-4
Figure A3. Window Sticker (Monroney Label).....	A-5
Figure A4. Vehicle Certification Label	A-6
Figure A5. Tire Placard	A-7
Figure A6. DGPS, Inertial Measurement Unit, and MicroAutoBox Installed in Subject Vehicle.....	A-8
Figure A7. Sensors for Detecting Visual and Auditory Alerts	A-9
Figure A8. Computer Installed in Subject Vehicle	A-10
Figure A9. LDW Menus (page 1 of 2)	A-11
Figure A10. LDW Menus (page 2 of 2)	A-12
Figure A11. LDW Status Indicator/Visual Alert.....	A-13
Figure A12. LDW On/Off Switch	A-14



Figure A1. Front View of Subject Vehicle



Figure A2. Rear View of Subject Vehicle

2021 K5 EX
 MODEL/OPT. CODE: L4262 / 015
 EXTERIOR COLOR: EBONY BLACK
 INTERIOR COLOR: BLACK
 VEHICLE ID NUMBER: 5XXG34J2XMG00
 PORT OF ENTRY: WEST POINT

Sold To: _____ Ship To: _____

KIA

STOCK NO.: _____
 VIN: MG00 _____
 MODEL: 2021 KIA K5 EX
 AVAIL. SERVICE AGREEMENT: _____
 OPTIONAL - ASK DEALER FOR DETAILS

STANDARD FEATURES

MECHANICAL
 1.6L Turbo 4-Cylinder Engine
 8-Speed Automatic Transmission
 Electronic Parking Brake w/ Auto Hold

KIA DRIVEWISE DRIVER-ASSIST TECHNOLOGY
 Forward Collision-Avoidance Assist-Pedestrian
 Blind-Spot Collision-Avoidance Assist (BCA)
 Rear Cross-Traffic Collision-Avoidance Assist (RCCA)
 Safe Exit Assist (SEA)
 Lane Keep Assist (LKA) & Lane Following Assist (LFA)
 Driver Attention Warning (DAW)
 Leading Vehicle Departure Alert (LVDA)
 High Beam Assist (HBA)

SAFETY
 Dual Front Advanced Airbags & Driver's Knee Airbag
 Front and Rear Seat Mounted Side Airbags
 Full-Length Side Curtain Airbags
 Electronic Stability Control (ESC)
 Tire Pressure Monitoring System (TPMS)

INTERIOR, COMFORT & CONVENIENCE
 8" Touchscreen w/ Android Auto & Apple CarPlay
 Rear View Camera with Dynamic Guidelines
 USB Multimedia Port, USB Charger Port
 Dual Zone - Full Automatic Temperature Control
 Multi-Adjustable Manual Front Seats
 Smart Key / Push Button Start / Smart Trunk (Open)
 Remote Start / Remote Climate (Key Fob)
 Steering Wheel Controls (Bluetooth/Audio/Cruise)
 Tilt & Telescopic Steering Column
 Power Windows w/ Driver's One-Touch Auto Up / Down
 Rear Occupant Alert

EXTERIOR
 LED Reflector Headlights
 Auto-On/Off Headlights
 Amber LED Daytime Running Lights
 Power, Heated Outside Mirrors
 Acoustic Front Windshield
 16" Alloy Wheels w/compact spare

WARRANTY
 10 Year/100,000 Mile Limited Powertrain Warranty
 5 Year/60,000 Mile Limited Basic Warranty
 5 Year/60,000 Mile Roadside Assistance
 *Ask dealer for details

TOTAL ADDITIONAL WEIGHT: 7.3

MANUFACTURER'S SUGGESTED RETAIL PRICE ▶ \$ 27,990.00


COMPARE EX FEATURES
 Added to/in place of standard LXS features
 - Panoramic Sunroof w/ Power Sunshade
 - 18" Machined Finished Alloy Wheels
 - UVO link (1 yr trial; see owners.kia.com for details)
 - SIRIUSXM™ wirefree 3-mo. subscription*
 - Leatherette Seat Trim
 - Heated & Ventilated Front Seats
 - Wireless Phone Charger
 - Rear USB charger ports & Air Vents
 - Power Driver's Seat with Power Lumbar
 - Auto Up/Down Front Passenger Window
 - Parking Distance Warning Reverse (PDW-R)
 - Leather Steering Wheel

ADDITIONAL INSTALLED EQUIPMENT:
 (In addition to or in place of standard features)
 EX Premium Package
 - Navigation w/10.25" Touchscreen & MapCare
 - Bose Premium Audio System
 - Power Front Pass. Seat with Power Lumbar
 - Heated Steering Wheel
 - Forward Collision Avoidance-Assist - Cyclist
 - Forward Collision Avoidance-Assist - Junction Turning
 - Smart Cruise Control w/ Stop & Go
 - Highway Driving Assist (HDA)
 - Safe Exit Assist w/ Power Child Lock
 - Parking Collision Avoidance- Rear (PCA-R)
 - LED Rear Combination Lights
 - Memory Driver's Seat & Outside Mirrors
 Carpeted Floor Mats

MSRP INCLUDING OPTIONS \$ 31,545.00

INLAND FREIGHT AND HANDLING \$ 965.00

TOTAL MANUFACTURER'S SUGGESTED RETAIL PRICE ▶ \$ 32,510.00



EPA Fuel Economy and Environment

Fuel Economy
31 MPG
 combined city/hwy
 27 city
 37 highway
 3.2 gallons per 100 miles

You save \$1,000
 in fuel costs over 5 years compared to the average new vehicle.

Annual fuel cost \$1,300

Fuel Economy & Greenhouse Gas Rating (tailpipe only) **7**
 Best 10 Worst

Smog Rating (tailpipe only) **5**
 Best 10 Worst

Actual results will vary for many reasons, including driving conditions and how you drive and maintain your vehicle. The average new vehicle gets 27 MPG and costs \$7,500 to fuel over 5 years. Cost estimates are based on 15,000 miles per year at \$ 2.20 per gallon. MPG is miles per gasoline gallon equivalent. Vehicle emissions are a significant cause of climate change and smog.

fuel economy.gov
 Calculate personalized estimates and compare vehicles

GOVERNMENT 5-STAR SAFETY RATINGS

Overall Vehicle Score Not Rated
 Based on the combined rating of frontal, side and rollover. Should ONLY be compared to other vehicles of similar size and weight.

Frontal Driver Not Rated
 Passenger Not Rated
Crash Not Rated
 Based on the risk of injury in a frontal impact. Should ONLY be compared to other vehicles of similar size and weight.

Side Front seat Not Rated
Crash Rear seat Not Rated
 Star ratings based on the risk of injury in a side impact.

Rollover Not Rated
 Star ratings based on the risk of rollover in a single-vehicle crash.

Star ratings range from 1 to 5 stars (***), with 5 being the highest. Source: National Highway Traffic Safety Administration (NHTSA), www.safercar.gov or 1-888-327-4236**

Manufacturer's suggested retail price includes Manufacturer's recommended pre-delivery service. License and title fees, state and local taxes and other dealer-installed options and accessories are not included in the manufacturer's suggested retail price.

PARTS CONTENT INFORMATION

FOR VEHICLES IN THIS CAR LINE U.S./CANADIAN PARTS CONTENT: 55 %

MAJOR SOURCES OF FOREIGN PARTS: KOREA: 35%

NOTE: PARTS CONTENT DOES NOT INCLUDE FINAL ASSEMBLY, DISTRIBUTION, OR OTHER NON-PARTS COSTS.

FOR THIS VEHICLE FINAL ASSEMBLY POINT: WEST POINT, GA, USA

COUNTRY OF ORIGIN
 ENGINE: USA
 TRANSMISSION: USA

STANDARD FEATURES

MECHANICAL
 1.6L Turbo 4-Cylinder Engine
 8-Speed Automatic Transmission
 Electronic Parking Brake w/ Auto Hold

KIA DRIVEWISE DRIVER-ASSIST TECHNOLOGY
 Forward Collision-Avoidance Assist-Pedestrian
 Blind-Spot Collision-Avoidance Assist (BCA)
 Rear Cross-Traffic Collision-Avoidance Assist (RCCA)
 Safe Exit Assist (SEA)
 Lane Keep Assist (LKA) & Lane Following Assist (LFA)
 Driver Attention Warning (DAW)
 Leading Vehicle Departure Alert (LVDA)
 High Beam Assist (HBA)

SAFETY
 Dual Front Advanced Airbags & Driver's Knee Airbag
 Front and Rear Seat Mounted Side Airbags
 Full-Length Side Curtain Airbags
 Electronic Stability Control (ESC)
 Tire Pressure Monitoring System (TPMS)

INTERIOR, COMFORT & CONVENIENCE
 8" Touchscreen w/ Android Auto & Apple CarPlay
 Rear View Camera with Dynamic Guidelines
 USB Multimedia Port, USB Charger Port
 Dual Zone - Full Automatic Temperature Control
 Multi-Adjustable Manual Front Seats
 Smart Key / Push Button Start / Smart Trunk (Open)
 Remote Start / Remote Climate (Key Fob)
 Steering Wheel Controls (Bluetooth/Audio/Cruise)
 Tilt & Telescopic Steering Column
 Power Windows w/ Driver's One-Touch Auto Up / Down
 Rear Occupant Alert

EXTERIOR
 LED Reflector Headlights
 Auto-On/Off Headlights
 Amber LED Daytime Running Lights
 Power, Heated Outside Mirrors
 Acoustic Front Windshield
 16" Alloy Wheels w/compact spare

WARRANTY
 10 Year/100,000 Mile Limited Powertrain Warranty
 5 Year/60,000 Mile Limited Basic Warranty
 5 Year/60,000 Mile Roadside Assistance
 *Ask dealer for details

TOTAL ADDITIONAL WEIGHT: 7.3

EPA Fuel Economy

THIS IS NOT AN OFFICIAL FACTORY STICKER

Affixed as a supplemental consumer information label by your dealer.

***DEALER'S ASKING PRICE. NOT THE MANUFACTURER'S SUGGESTED RETAIL PRICE.**

For Smog Rating, Fuel Economy & Greenhouse Gas Rating
 Visit fuel economy.gov

California-TOP
PROTECTING THE CONSUMER

*PLUS government fees and taxes, any financial charges, any California title fees, any dealer document processing charge, any electronic filing charge, and any emission testing charge.

fuel economy.gov
 Calculate estimates and compare vehicles

DEALER-ADDED EQUIPMENT & INFORMATION

MFR'S SUGG. RETAIL PRICE: \$32,510.00

Market Adjustment..... \$4,000.00
 Preparation Fee..... \$999.00
 Phantom Footprints..... \$599.00
 Door Edge Guard..... \$439.00
 Mud Guards..... \$249.00


ADDED MARK-UP: \$6,286.00

DEALER'S ASKING PRICE ▶ \$38,796.00

NOT THE MFR'S SUGGESTED RETAIL PRICE
INCLUDES DEALER-INSTALLED OPTIONS
 *PLUS government fees and taxes, any finance charges, any California title fees, any dealer document processing charge, any electronic filing charge, and any emission testing charge.

California-TOP - MODEL USE ONLY - EQUIPMENT NOT SHOWN
 800-4-A-CAR-DEALER CENTER • PO BOX 8075 HUNTSVILLE, AL 35898
 www.adaadtag.com • 1-800-4-A-CAR • ©2021 K. H.

Figure A3. Window Sticker (Monroney Label)

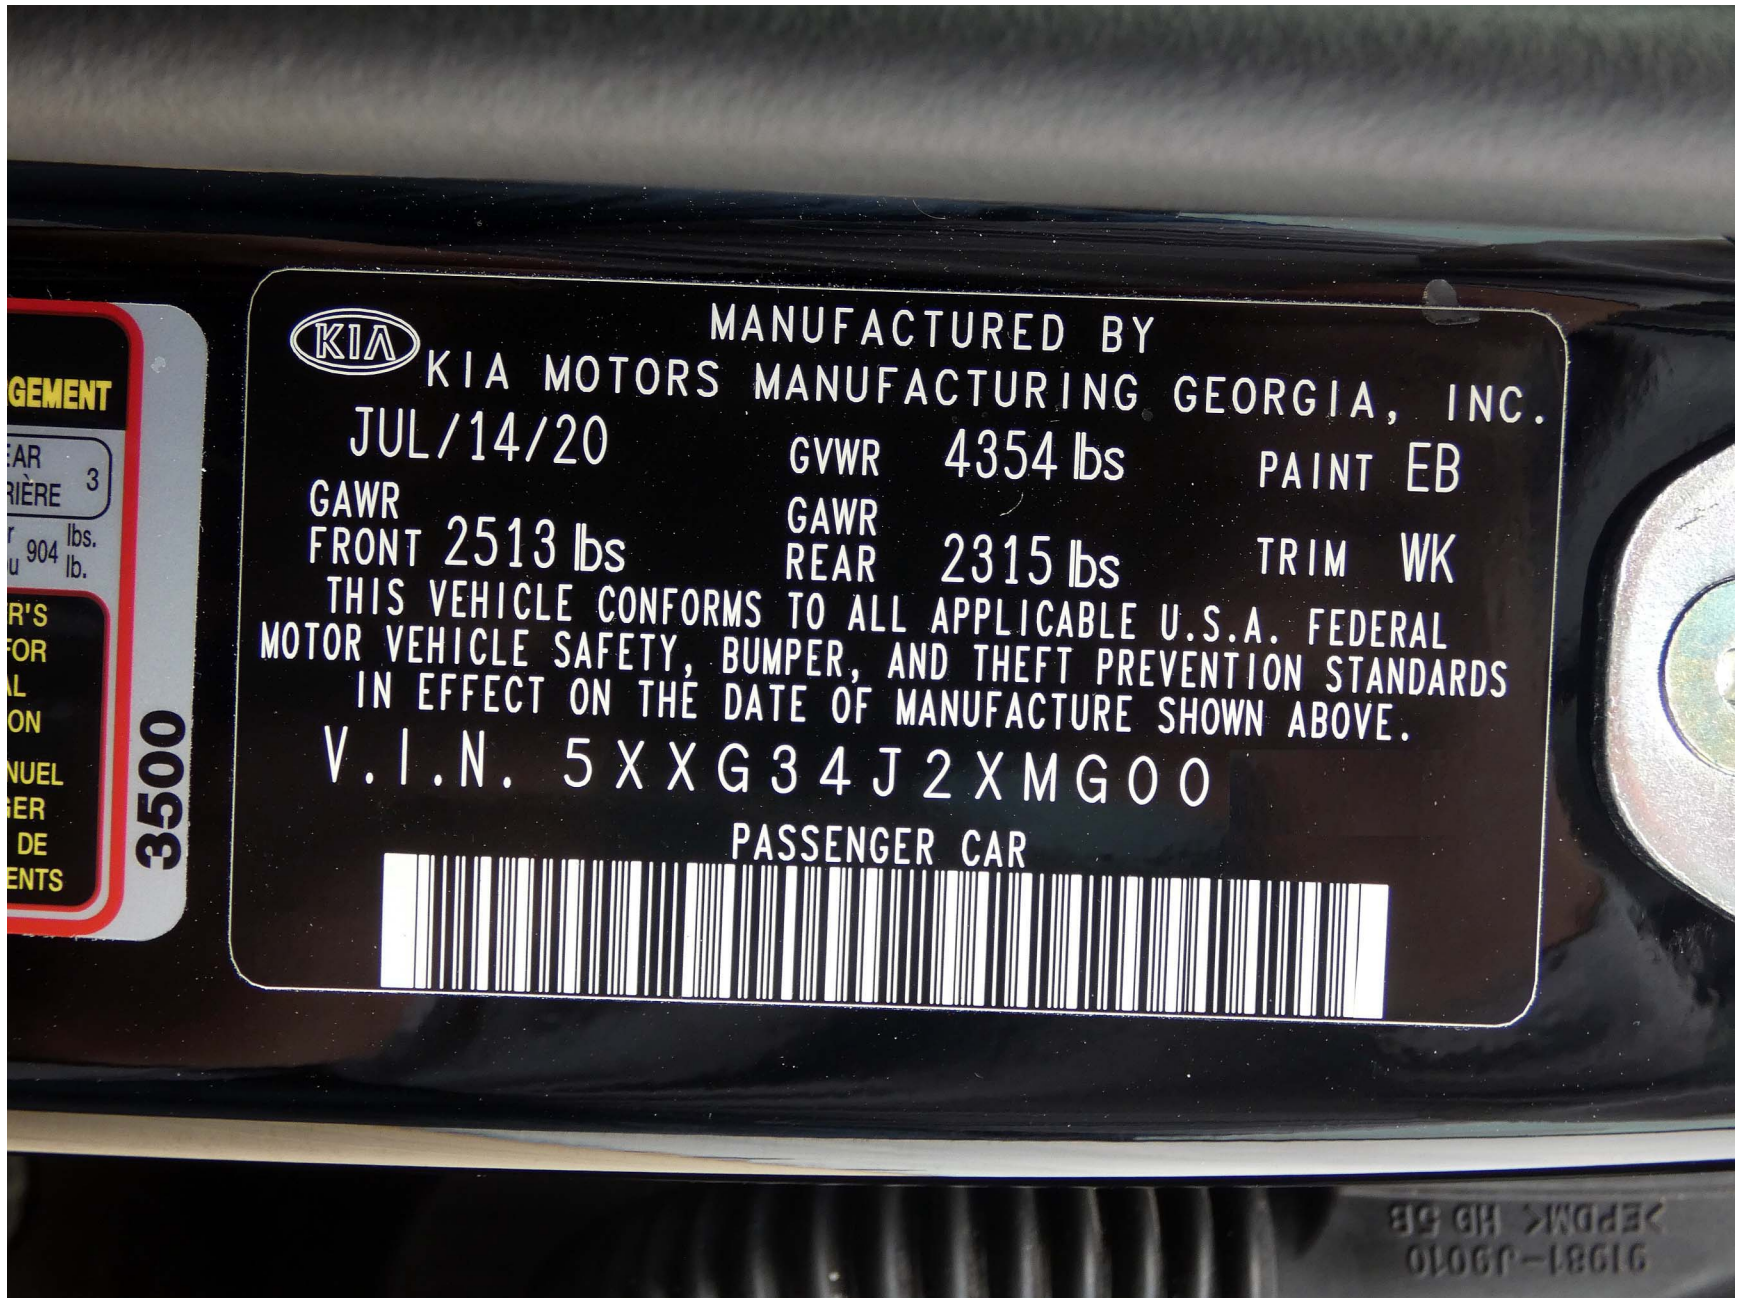

MANUFACTURED BY

KIA MOTORS MANUFACTURING GEORGIA, INC.

JUL/14/20

GVWR 4354 lbs

PAINT EB

GAWR
FRONT 2513 lbs

GAWR
REAR 2315 lbs

TRIM WK

THIS VEHICLE CONFORMS TO ALL APPLICABLE U.S.A. FEDERAL
MOTOR VEHICLE SAFETY, BUMPER, AND THEFT PREVENTION STANDARDS
IN EFFECT ON THE DATE OF MANUFACTURE SHOWN ABOVE.

V.I.N. 5XXG34J2XMG00

PASSENGER CAR



GEMENT

EAR
RIERE 3

r 904 lbs.
u lb.

R'S
FOR
AL
ON

NUEL
ER
DE
ENTS

3500

91981-19010
KPERDK HB 5B

Figure A4. Vehicle Certification Label



TIRE AND LOADING INFORMATION RENSEIGNEMENTS SUR LES PNEUS ET LE CHARGEMENT

SEATING CAPACITY NOMBRE DE PLACES	TOTAL 5	FRONT AVANT 2	REAR ARRIÈRE 3
--------------------------------------	---------	------------------	-------------------

The combined weight of occupants and cargo should never exceed 410 kg or 904 lbs.
Le poids total des occupants et du chargement ne doit jamais dépasser 410 kg ou 904 lb.

TIRE PNEU	SIZE DIMENSIONS	COLD TIRE PRESSURE PRESSION DES PNEUS À FROID	SEE OWNER'S MANUAL FOR ADDITIONAL INFORMATION VOIR LE MANUEL DE L'USAGER POUR PLUS DE RENSEIGNEMENTS
FRONT AVANT	235/45R18	240kPa , 35psi	
REAR ARRIÈRE	235/45R18	240kPa , 35psi	
SPARE DE SECOURS	T125/80D16	420kPa, 60psi	

3500

MO

Figure A5. Tire Placard



Figure A6. DGPS, Inertial Measurement Unit, and MicroAutoBox Installed in Subject Vehicle



Figure A7. Sensors for Detecting Visual and Auditory Alerts



Figure A8. Computer Installed in Subject Vehicle



Figure A9. LDW Menus (page 1 of 2)

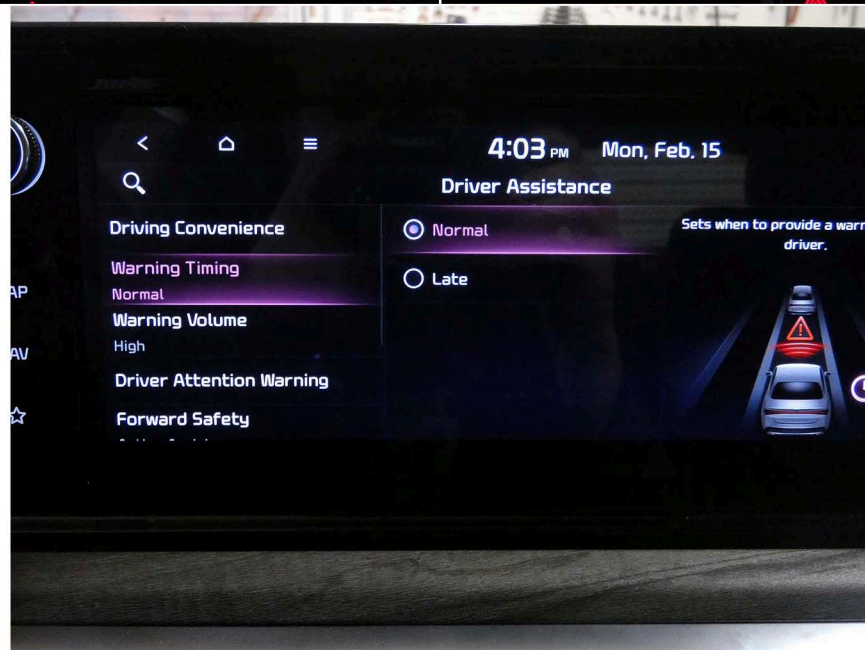
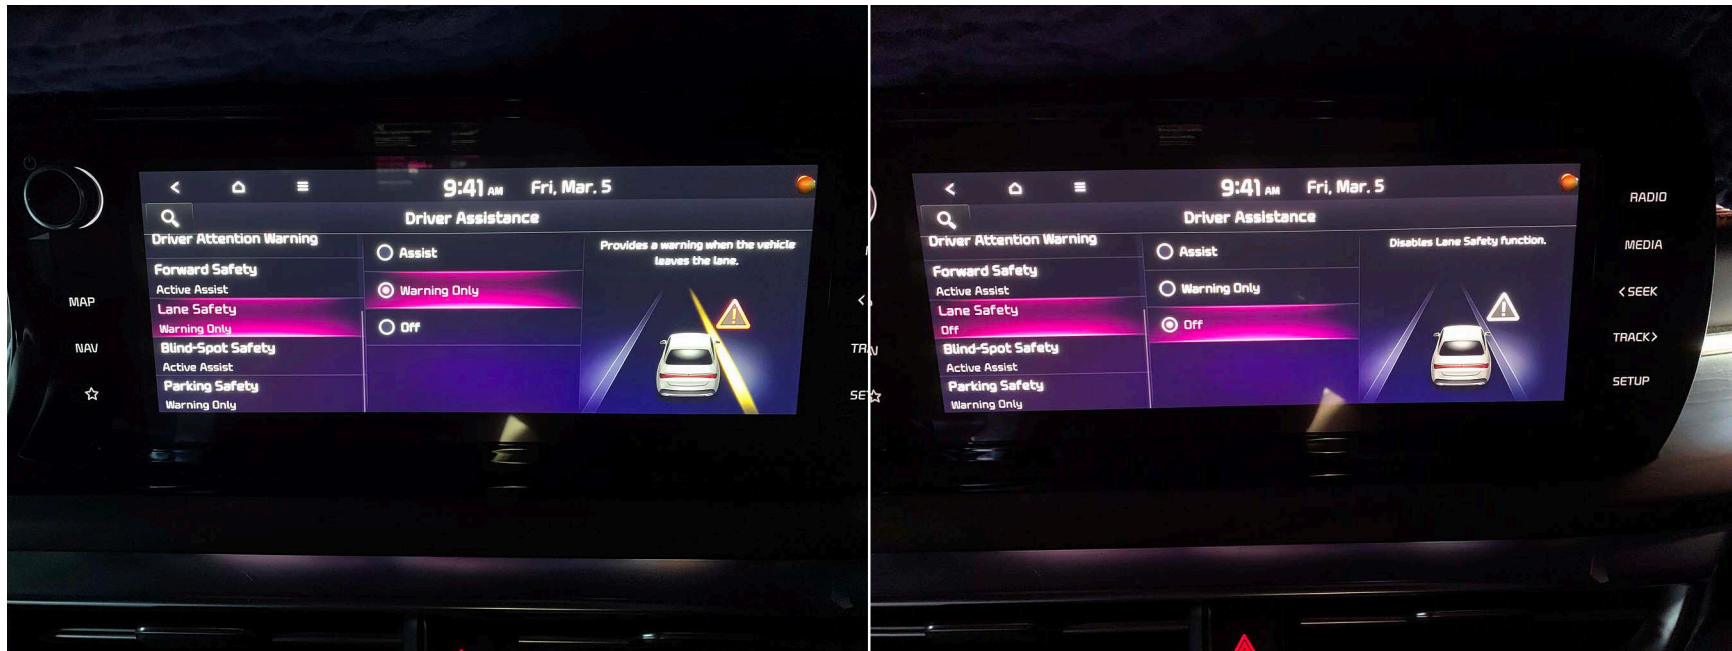


Figure A10. LDW Menu (page 2 of 2)



Figure A11. LDW Status Indicator/Visual Alert



Figure A12. LDW On/Off Switch

APPENDIX B

Excerpts from Owner's Manual

Interior overview



* The actual shape may differ from the illustration.

- | | |
|--|------------|
| 1. Inside door handle | 4-19, 4-26 |
| 2. Seat position memory system | 4-28 |
| 3. Outside rearview mirror folding switch | 4-72 |
| 4. Outside rearview mirror control switch | 4-72 |
| 5. Central door lock/unlock switch | 4-22 |
| 6. Power window switches | 4-38 |
| 7. Power window lock button | 4-24 |
| Electronic power child safety lock button | 4-25 |
| 8. Steering wheel tilt/telescopic lever | 4-56 |
| 9. Steering wheel | 4-55 |
| 10. Instrument panel illumination control switch | 4-76 |
| 11. Lane Safety button | 5-91 |
| 12. ESC OFF button | 5-29 |

1. Head-Up Display (if equipped)

Items	Explanation
Enable Head-up display	If this item is checked, Head-Up Display will be activated.
Display Height	Adjust the height (1~20) of the HUD image on the HUD screen.
Rotation	Adjust the degree (-5~+5) of the HUD rotation.
Brightness	Adjust the intensity (1~20) of the HUD brightness.

2. Driver Assistance (if equipped)

Items	Explanation
Warning Timing	<ul style="list-style-type: none"> • Normal/Late To select the Warning time
Warning Volume	<ul style="list-style-type: none"> • High/Medium/Low To select the Warning volume
Driver Attention Warning	<ul style="list-style-type: none"> • Inattentive Driving Warning To select the function. * For more details, refer to the "Driver Attention Warning (DAW) (if equipped)" on page 5-114.
Forward Safety	To adjust Forward Collision-Avoidance Assist system. <ul style="list-style-type: none"> • Active Assist/Warning Only/Off To select the functions.
Lane Safety	To adjust Lane Keeping Assist system. <ul style="list-style-type: none"> • Lane Keeping Assist/Lane Departure Warning/Off To select the functions.
Blind-Spot Safety	<ul style="list-style-type: none"> • Blind-Spot View To activate or deactivate Blind-Spot View. <ul style="list-style-type: none"> • Safe Exit Assist To activate or deactivate Safe Exit Assist. For more details, refer to "Safe Exit Assist (SEA) (if equipped)" on page 5-109. <ul style="list-style-type: none"> • Active assist • Warning only • Off For more details, refer to "Blind-Spot Collision-Avoidance Assist (BCA) (if equipped)" on page 5-97.

4

- When there is a malfunction with FCA. If this occurs, have your vehicle inspected by an authorized Kia dealer.
- * For more details, refer to "Forward Collision-Avoidance Assist (FCA) - front view camera only (if equipped)" on page 5-63/"Forward Collision-Avoidance Assist (FCA) - sensor fusion (if equipped)" on page 5-76.

Electronic Parking Brake (EPB) warning light  (if equipped)

This warning light illuminates:

- Once you set the ignition switch or ENGINE START/STOP button to the ON position.
 - It illuminates for approximately 3 seconds and then goes off.
- When there is a malfunction with the EPB. In this case, have the vehicle inspected by an authorized Kia dealer.

*** NOTICE**

Electronic Parking Brake (EPB) Warning Light

The Electronic Parking Brake (EPB) Warning Light may illuminate when the Electronic Stability Control (ESC) Indicator Light comes on to indicate that the ESC is not working properly

(This does not indicate malfunction of the EPB).

Lane Keeping Assist indicator  (if equipped)

LKA indicator will illuminate when you turn Lane Keeping Assist on by pressing Lane Safety button.

If there is a problem with the system, the yellow LKA indicator will illuminate.

- * For more details, refer to "Lane Keeping Assist (LKA) (if equipped)" on page 5-91.

Malfunction Indicator Lamp (MIL)



This warning light illuminates:

- When you set the ignition switch or the ENGINE START/STOP button to the ON position.
 - The malfunction indicator light illuminates for about 3 seconds and then goes off.
- Whenever there is a malfunction with either the emission control system or the engine or the vehicle powertrain. In this case, have the vehicle inspected by an authorized Kia dealer.

4

- When the Head-Up Display needs inspection or repair, have your vehicle inspected or repaired by an authorized Kia dealer.

⚠ WARNING

Head-Up Display

- Do not place any accessories on the Head-Up Display shutter. It might fall into Head-Up Display and can damage to Head-Up Display.
- Do not attach stickers or accessories to the Head-Up Display and the crash pad.
- Do not manually adjust the shutter and combiner. The images may not be visible due to fingerprints. Excessive external force during operation may cause damage.
- Do not place any objects near the Head-Up Display. Interference with the object during operation may damage it.
- Do not place any objects around the Head-Up Display. It might enter the narrow gap of the cover and affects operation.
- Do not place any liquids around the Head-Up Display. Water or other liquids can flow into the Head-Up Display and break it.
- Do not expose the combiner to strong light. The combiner may become deformed.

- Do not use organic solvents, detergents or abrasive cloths to clean the Head-Up Display. Wipe it off with a soft cloth. Do not strongly wipe Head-Up Display shutter. It might get damaged.
- For safety, be sure to adjust the settings when the vehicle is stopped.
- When opening, closing and height adjusting the Head-Up Display, noise may be generated by the motor and gear.

4

Head-Up Display Information




1. Turn By Turn navigation information (if equipped)
2. Road signs
3. Speedometer
4. SCC setting speed information (if equipped)
5. SCC headway information (if equipped)
6. Lane Safety information (if equipped)

Lane Keeping Assist (LKA) (if equipped)

Lane Keeping Assist is designed to help detect lane markings while driving over a certain speed. The system will warn the driver if the vehicle leaves the lane without using the turn signal, or will automatically assist the driver's steering to help prevent the vehicle from departing the lane.

Detecting sensor

Front view camera

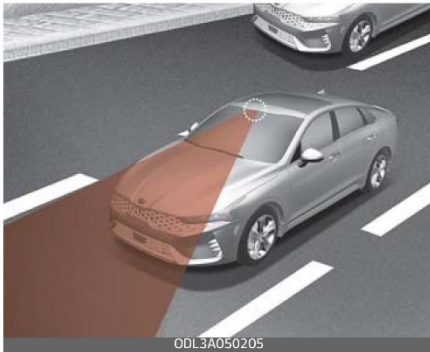

The front view camera is used as a detecting sensor to detect lane markings (or road edges).

Refer to the picture above for the detailed location of the detecting sensor.

CAUTION

For more details on the precautions of the front view camera, refer to "Forward Collision-Avoidance Assist (FCA) - front view camera only (if equipped)" on page 5-63.

System Settings


Setting functions for the system

Lane Safety

With the ENGINE START/STOP button in the ON position, select or deselect 'Driver Assistance → Lane Safety' from the Settings menu to set whether or not to use each function.

- If 'Assist' is selected, the system will automatically assist the driver's steering when lane departure is detected to help prevent the vehicle from moving out of its lane.


5


- If 'Warning Only' is selected, the system will warn the driver with an audible warning when lane departure is detected. The driver must steer the vehicle.
- If 'Off' is selected, the system will turn off. The  indicator light will turn off on the cluster.

⚠ WARNING

- If 'Warning Only' is selected, steering is not assisted.
- Lane Keeping Assist does not control the steering wheel when the vehicle is driven in the middle of the lane.
- The driver should always be aware of the surroundings and steer the vehicle if 'Off' is selected.

Turning the system ON/OFF

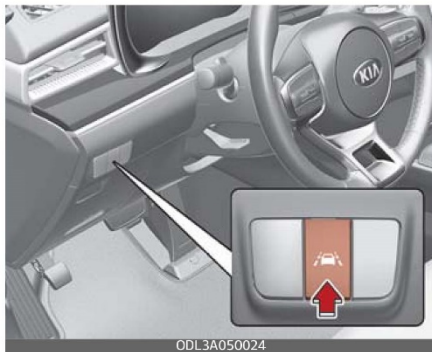

With the ENGINE START/STOP button in the ON position, press the Lane Safety button located on the instrument panel to turn on Lane Keeping Assist. The white  indicator light will illuminate on the cluster.

Press the button again to turn off the system.

*** NOTICE**

- If the engine is restarted, Lane Keeping Assist will maintain the last setting.
- When Lane Keeping Assist is turned off with the Lane Safety button, Lane Safety settings will turn off.

Warning Volume

With the ENGINE START/STOP button in the ON position, select 'Driver Assistance → Warning Volume' from the Settings menu to change the Warning Volume to 'High', 'Medium' or 'Low' for Lane Keeping Assist.

If you change the Warning Volume, the Warning Volume of other Driver Assistance systems may be changed.

System Operation

System warning and control

Lane Keeping Assist will warn and control the vehicle with Lane Departure Warning and Lane Keeping Assist.


Lane Departure Warning

Left



Right




- To warn the driver that the vehicle is departing from the projected lane in front, the green  indicator light will blink

on the cluster, the lane line will blink on the cluster depending on which direction the vehicle is veering, and an audible warning will sound.

- The system will operate when your vehicle speed is between approximately 40~120 mph (60~200 km/h).

Lane Keeping Assist

- To warn the driver that the vehicle is departing from the projected lane in front, the green  indicator light will blink on the cluster, and the steering wheel will make adjustments to keep vehicle inside the lane.
- The system will operate when your vehicle speed is between approximately 40~120 mph (60~200 km/h).



Hands-off warning




If the driver takes their hands off the steering wheel for several seconds, the 'Keep hands on the steering wheel' warning message will appear on the cluster, and an audible warning will sound in stages.

⚠ WARNING

- The steering wheel may not be assisted if the steering wheel is held very tight or the steering wheel is steered over a certain degree.
- Lane Keeping Assist does not operate at all times. It is the responsibility of the driver to safely steer the vehicle and to maintain the vehicle in its lane.
- The hands-off warning message may appear late depending on road conditions. Always have your hands on the steering wheel while driving.
- If the steering wheel is held very lightly, the hands-off warning message may appear because the system may not recognize that the driver has their hands on the steering wheel.
- If you attach objects to the steering wheel, the hands-off warning may not work properly.

⚠ CAUTION

For more details on setting the functions in the infotainment system, refer to "LCD displays" on page 4-92.

- When lane markings are detected, the lane lines on the cluster will change from grey to white and the green 「」 indicator light will illuminate.

Lane undetected



Lane detected



- Even though the steering is assisted by Lane Keeping Assist,

the driver may control the steering wheel.

- The steering wheel may feel heavier or lighter when the steering wheel is assisted by Lane Keeping Assist than when it is not.

System Malfunction and Limitations

System malfunction



When Lane Keeping Assist is not working properly, the 'Check Lane Keeping Assist (LKA) system' warning message will appear and the yellow  indicator light will illuminate on the cluster. If this occurs, we recommend that the system be inspected by an authorized Kia dealer/service partner.

Limitations of the system

Lane Keeping Assist may not operate normally or may operate unexpectedly under the following circumstances:

- The lane is contaminated or difficult to distinguish because,
 - The lane markings is covered with rain, snow, dirt, oil, etc.
 - The color of the lane marking (or road edge) is not distinguishable from the road
 - There are markings on the road near the lane or the markings on the road looks similar to the lane markings
 - The lane marking is indistinct or damaged
 - The shadow is on the lane marking by a median strip, trees, guardrail, noise barriers, etc.
- There are more than two lane markings on the road
- The lane number increases or decreases, or the lane markings are crossing
- The lane markings are complicated or a structure substitutes for the lines, such as a construction area
- There are road markings, such as zigzag lanes, crosswalk markings and road signs
- The lane suddenly disappears, such as at the intersection

- The lane (or road width) is very wide or narrow
- There is a road edge without a lane
- There is a boundary structure in the roadway, such as a tollgate, sidewalk, curb, etc.
- The distance to the front vehicle is extremely short or the vehicle in front is covering the lane marking (or road edge)

CAUTION

For more details on the limitations of the front view camera, refer to "Forward Collision-Avoidance Assist (FCA) - front view camera only (if equipped)" on page 5-63.

WARNING

Take the following precautions when using Lane Keeping Assist:


- The driver should hold the responsibility to safely drive and control the vehicle. Do not solely rely on the system and drive dangerously.
- The operation of Lane Keeping Assist can be canceled or not work properly depending on road conditions and surroundings. Always be cautious while driving.
- Refer to "Limitations of the System" if the lane is not detected properly.
- When you are towing a trailer or another vehicle, we recommend that Lane Keeping Assist is turned off due to safety reasons.
- If the vehicle is driven at high speed, the steering wheel will not be controlled. The driver must always follow the speed limit when using the system.
- If any other system's warning message is displayed or audible warning is generated, Lane Keeping Assist warning message may not be displayed and audible warning may not be generated.
- You may not hear the warning sound of Lane Keeping Assist if the surrounding is noisy.
- If you attach objects to the steering wheel, steering may not be assisted properly.

- Lane Keeping Assist may not operate for approximately 15 seconds after the vehicle is started, or the front view camera is initialized.
 - Lane Keeping Assist will not operate when:
 - The turn signal or hazard warning flasher is turned on
 - The vehicle is not driven in the center of the lane when the system is turned on or right after changing a lane
 - ESC (Electronic Stability Control) or VSM (Vehicle Stability Management) is activated
 - The vehicle is driven on a sharp curve
 - Vehicle speed is below 35 mph (55 km/h) or above 130 mph (210 km/h)
 - The vehicle makes sharp lane changes
 - The vehicle brakes suddenly
-

Blind-Spot Collision-Avoidance Assist (BCA) (if equipped)

Blind-Spot Collision-Avoidance Assist is designed to help detect and monitor approaching vehicles in the driver's blind spot area and warn the driver of a possible collision with a warning message and audible warning.

In addition, if there is a risk of collision when changing lanes or driving forward out of a parking space, the system will help avoid collision by applying the brake.

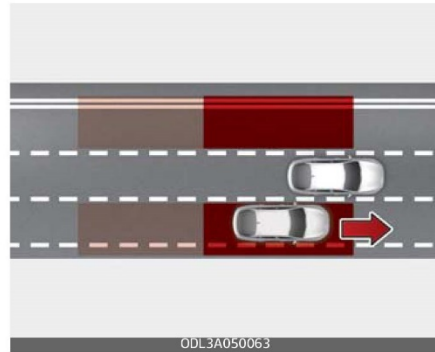

Blind-Spot Collision-Avoidance Assist will help detect and inform the driver that a vehicle is in the blind spot.

5

APPENDIX C

Run Log

Subject Vehicle: **2021 Kia K5 EX**

Test Date: **2/17/2021**

Driver: **N. Watanabe**

Note: For Distance at Warning, positive values indicate inside the lane

Run	Lane Marking Type	Departure Direction	Valid Run?	Distance at Auditory Alert (ft)	Distance at Visual Alert (ft)	Pass/Fail	Notes
1	Solid	Left	Y	-0.17	-0.25	Pass	
2			N				Yaw
3			Y	-0.14	-0.22	Pass	
4			Y	-0.16	-0.24	Pass	
5			Y	-0.18	-0.28	Pass	
6			Y	-0.23	-0.25	Pass	
7			Y	-0.27	-0.38	Pass	
8			Y	-0.19	-0.31	Pass	
9	Solid	Right	Y	0.48	0.40	Pass	
10			Y	0.53	0.44	Pass	
11			Y	0.46	0.40	Pass	
12			Y	0.48	0.41	Pass	
13			Y	0.47	0.38	Pass	
14			Y	0.49	0.44	Pass	
15			Y	0.46	0.37	Pass	
16	Dashed	Right	Y	0.47	0.35	Pass	
17			Y	0.47	0.39	Pass	

Run	Lane Marking Type	Departure Direction	Valid Run?	Distance at Auditory Alert (ft)	Distance at Visual Alert (ft)	Pass/Fail	Notes
18	Dashed	Right	Y	0.44	0.32	Pass	
19			Y	0.51	0.42	Pass	
20			Y	0.54	0.48	Pass	
21			Y	0.57	0.47	Pass	
22			Y	0.47	0.37	Pass	
23	Dashed	Left	Y	-0.22	-0.32	Pass	
24			Y	-0.18	-0.28	Pass	
25			Y	-0.27	-0.37	Pass	
26			Y	-0.27	-0.34	Pass	
27			Y	-0.27	-0.39	Pass	
28			Y	-0.19	-0.31	Pass	
29			Y	-0.13	-0.22	Pass	
30	Botts	Left	Y	-0.12	-0.24	Pass	
31			Y	-0.15	-0.26	Pass	
32			Y	-0.23	-0.34	Pass	
33			Y	-0.21	-0.30	Pass	
34			N				Lateral velocity
35			Y	-0.31	-0.44	Pass	
36			N				GPS floating
37			Y	-0.25	-0.32	Pass	
38			Y	-0.36	-0.42	Pass	

Run	Lane Marking Type	Departure Direction	Valid Run?	Distance at Auditory Alert (ft)	Distance at Visual Alert (ft)	Pass/Fail	Notes
39	Botts	Right	Y	0.67	0.57	Pass	
40			Y	0.58	0.51	Pass	
41			Y	0.60	0.50	Pass	
42			Y	0.47	0.37	Pass	
43			Y	0.51	0.45	Pass	
44			Y	0.49	0.41	Pass	
45			Y	0.53	0.46	Pass	

APPENDIX D

Time History Plots

LIST OF FIGURES

	Page
Figure D1. Example Time History for Lane Departure Warning Test, Passing.....	D-8
Figure D2. Example Time History for Lane Departure Warning Test, Failing, No Warning Issued.....	D-9
Figure D3. Example Time History for Lane Departure Warning Test, Invalid Run Due to Subject Vehicle Yaw Rate	D-10
Figure D4. Time History for Run 01, Solid Line, Left Departure, Audible Warning	D-11
Figure D5. Time History for Run 01, Solid Line, Left Departure, Visual Warning	D-12
Figure D6. Time History for Run 03, Solid Line, Left Departure, Audible Warning	D-13
Figure D7. Time History for Run 03, Solid Line, Left Departure, Visual Warning	D-14
Figure D8. Time History for Run 04, Solid Line, Left Departure, Audible Warning	D-15
Figure D9. Time History for Run 04, Solid Line, Left Departure, Visual Warning	D-16
Figure D10. Time History for Run 05, Solid Line, Left Departure, Audible Warning	D-17
Figure D11. Time History for Run 05, Solid Line, Left Departure, Visual Warning	D-18
Figure D12. Time History for Run 06, Solid Line, Left Departure, Audible Warning	D-19
Figure D13. Time History for Run 06, Solid Line, Left Departure, Visual Warning	D-20
Figure D14. Time History for Run 07, Solid Line, Left Departure, Audible Warning	D-21
Figure D15. Time History for Run 07, Solid Line, Left Departure, Visual Warning	D-22
Figure D16. Time History for Run 08, Solid Line, Left Departure, Audible Warning	D-23
Figure D17. Time History for Run 08, Solid Line, Left Departure, Visual Warning	D-24
Figure D18. Time History for Run 09, Solid Line, Right Departure, Audible Warning.....	D-25
Figure D19. Time History for Run 09, Solid Line, Right Departure, Visual Warning.....	D-26
Figure D20. Time History for Run 10, Solid Line, Right Departure, Audible Warning.....	D-27
Figure D21. Time History for Run 10, Solid Line, Right Departure, Visual Warning.....	D-28
Figure D22. Time History for Run 11, Solid Line, Right Departure, Audible Warning.....	D-29
Figure D23. Time History for Run 11, Solid Line, Right Departure, Visual Warning.....	D-30
Figure D24. Time History for Run 12, Solid Line, Right Departure, Audible Warning.....	D-31
Figure D25. Time History for Run 12, Solid Line, Right Departure, Visual Warning.....	D-32
Figure D26. Time History for Run 13, Solid Line, Right Departure, Audible Warning.....	D-33
Figure D27. Time History for Run 13, Solid Line, Right Departure, Visual Warning.....	D-34
Figure D28. Time History for Run 14, Solid Line, Right Departure, Audible Warning.....	D-35
Figure D29. Time History for Run 14, Solid Line, Right Departure, Visual Warning.....	D-36
Figure D30. Time History for Run 15, Solid Line, Right Departure, Audible Warning.....	D-37
Figure D31. Time History for Run 15, Solid Line, Right Departure, Visual Warning.....	D-38
Figure D32. Time History for Run 16, Dashed Line, Right Departure, Audible Warning	D-39
Figure D33. Time History for Run 16, Dashed Line, Right Departure, Visual Warning.....	D-40
Figure D34. Time History for Run 17, Dashed Line, Right Departure, Audible Warning	D-41
Figure D35. Time History for Run 17, Dashed Line, Right Departure, Visual Warning.....	D-42
Figure D36. Time History for Run 18, Dashed Line, Right Departure, Audible Warning	D-43
Figure D37. Time History for Run 18, Dashed Line, Right Departure, Visual Warning.....	D-44
Figure D38. Time History for Run 19, Dashed Line, Right Departure, Audible Warning	D-45

Figure D39.	Time History for Run 19, Dashed Line, Right Departure, Visual Warning.....	D-46
Figure D40.	Time History for Run 20, Dashed Line, Right Departure, Audible Warning	D-47
Figure D41.	Time History for Run 20, Dashed Line, Right Departure, Visual Warning.....	D-48
Figure D42.	Time History for Run 21, Dashed Line, Right Departure, Audible Warning	D-49
Figure D43.	Time History for Run 21, Dashed Line, Right Departure, Visual Warning.....	D-50
Figure D44.	Time History for Run 22, Dashed Line, Right Departure, Audible Warning	D-51
Figure D45.	Time History for Run 22, Dashed Line, Right Departure, Visual Warning.....	D-52
Figure D46.	Time History for Run 23, Dashed Line, Left Departure, Audible Warning.....	D-53
Figure D47.	Time History for Run 23, Dashed Line, Left Departure, Visual Warning.....	D-54
Figure D48.	Time History for Run 24, Dashed Line, Left Departure, Audible Warning.....	D-55
Figure D49.	Time History for Run 24, Dashed Line, Left Departure, Visual Warning.....	D-56
Figure D50.	Time History for Run 25, Dashed Line, Left Departure, Audible Warning.....	D-57
Figure D51.	Time History for Run 25, Dashed Line, Left Departure, Visual Warning.....	D-58
Figure D52.	Time History for Run 26, Dashed Line, Left Departure, Audible Warning.....	D-59
Figure D53.	Time History for Run 26, Dashed Line, Left Departure, Visual Warning.....	D-60
Figure D54.	Time History for Run 27, Dashed Line, Left Departure, Audible Warning.....	D-61
Figure D55.	Time History for Run 27, Dashed Line, Left Departure, Visual Warning.....	D-62
Figure D56.	Time History for Run 28, Dashed Line, Left Departure, Audible Warning.....	D-63
Figure D57.	Time History for Run 28, Dashed Line, Left Departure, Visual Warning.....	D-64
Figure D58.	Time History for Run 29, Dashed Line, Left Departure, Audible Warning.....	D-65
Figure D59.	Time History for Run 29, Dashed Line, Left Departure, Visual Warning.....	D-66
Figure D60.	Time History for Run 30, Botts Dots, Left Departure, Audible Warning	D-67
Figure D61.	Time History for Run 30, Botts Dots, Left Departure, Visual Warning	D-68
Figure D62.	Time History for Run 31, Botts Dots, Left Departure, Audible Warning	D-69
Figure D63.	Time History for Run 31, Botts Dots, Left Departure, Visual Warning	D-70
Figure D64.	Time History for Run 32, Botts Dots, Left Departure, Audible Warning	D-71
Figure D65.	Time History for Run 32, Botts Dots, Left Departure, Visual Warning	D-72
Figure D66.	Time History for Run 33, Botts Dots, Left Departure, Audible Warning	D-73
Figure D67.	Time History for Run 33, Botts Dots, Left Departure, Visual Warning	D-74
Figure D68.	Time History for Run 35, Botts Dots, Left Departure, Audible Warning	D-75
Figure D69.	Time History for Run 35, Botts Dots, Left Departure, Visual Warning	D-76
Figure D70.	Time History for Run 37, Botts Dots, Left Departure, Audible Warning	D-77
Figure D71.	Time History for Run 37, Botts Dots, Left Departure, Visual Warning	D-78
Figure D72.	Time History for Run 38, Botts Dots, Left Departure, Audible Warning	D-79
Figure D73.	Time History for Run 38, Botts Dots, Left Departure, Visual Warning	D-80
Figure D74.	Time History for Run 39, Botts Dots, Right Departure, Audible Warning.....	D-81
Figure D75.	Time History for Run 39, Botts Dots, Right Departure, Visual Warning	D-82
Figure D76.	Time History for Run 40, Botts Dots, Right Departure, Audible Warning.....	D-83
Figure D77.	Time History for Run 40, Botts Dots, Right Departure, Visual Warning.....	D-84
Figure D78.	Time History for Run 41, Botts Dots, Right Departure, Audible Warning.....	D-85
Figure D79.	Time History for Run 41, Botts Dots, Right Departure, Visual Warning.....	D-86
Figure D80.	Time History for Run 42, Botts Dots, Right Departure, Audible Warning.....	D-87
Figure D81.	Time History for Run 42, Botts Dots, Right Departure, Visual Warning.....	D-88

Figure D82. Time History for Run 43, Botts Dots, Right Departure, Audible Warning	D-89
Figure D83. Time History for Run 43, Botts Dots, Right Departure, Visual Warning	D-90
Figure D84. Time History for Run 44, Botts Dots, Right Departure, Audible Warning	D-91
Figure D85. Time History for Run 44, Botts Dots, Right Departure, Visual Warning	D-92
Figure D86. Time History for Run 45, Botts Dots, Right Departure, Audible Warning	D-93
Figure D87. Time History for Run 45, Botts Dots, Right Departure, Visual Warning	D-94

Description of Time History Plots

A set of time history plots is provided for each valid run in the test series. Each set of plots comprises time varying data from the Subject Vehicle, as well as pass/fail envelopes and thresholds. The following is a description of data types shown in the time history plots, as well as a description of the color code for data envelopes.

Time History Plot Description

Time history figures include the following sub-plots:

- Warning – Indicates timing of warning issued by LDW system. Depending on the type of LDW alert or instrumentation used to measure the alert, this can be any of the following:
 - Filtered and rectified sound signal
 - Filtered and rectified acceleration (e.g., steering wheel vibration)
 - Light sensor signal
 - Discrete on/off value
- Speed (mph) – Speed of the Subject Vehicle
- Yaw Rate (deg/sec) – Yaw rate of the Subject Vehicle
- Distance to Lane Edge (ft) – Lateral distance (in lane coordinates) from the outer front tire bulge to the inside edge of the lane marking of interest for a given test (a positive value indicates the vehicle is completely within the lane while a negative value indicates that the outer front tire bulge has crossed over the inner lane marking edge). The distance to the lane edge at the moment the LDW alert is issued, is displayed to the right of subplot.
- Lateral Lane Velocity (ft/sec) – Lateral velocity (in lane coordinates) of the outer front tire bulge
- Bird's Eye View – Indicates the position of the Subject Vehicle with respect to the lane marking of interest for a given test. Green rectangles represent the Subject Vehicle's position at approximately 2 second intervals, while the yellow rectangle indicates the position of the Subject Vehicle at the time of LDW warning issuance.

Envelopes and Thresholds

Each of the time history plot figures can contain either green or yellow envelopes and/or black threshold lines. These envelopes and thresholds are used to programmatically and visually determine the validity of a given test run. Envelope and threshold exceedances are indicated with either red shading or red asterisks, and red text is placed to the right side of the plot indicating the type of exceedance.

Green envelopes indicate that the time-varying data should not exceed the envelope boundaries at any time within the envelope. Exceedances of a green envelope are indicated by red shading in the area between the measured time-varying data and the envelope boundaries.

Yellow envelopes indicate that the time-varying data should not exceed the envelope only at the right end. Exceedances at the right extent of a yellow envelope are indicated by red asterisks. Data within the boundaries at the right extent of a yellow envelope are indicated by green circles.

For the warning plot, a dashed black threshold line indicates the threshold used to determine the onset of the LDW alert. The alert is considered on the first time the alert signal crosses this threshold line.

Color Codes

Color codes have been adopted to easily identify the types of data, envelopes, and thresholds used in the plots.

Color codes can be broken into three categories:

1. Validation envelopes and thresholds
 1. Validation envelopes and thresholds
 2. Instantaneous samplings
 3. Text
1. Validation envelope and threshold color codes:
 - Green envelope = time varying data must be within the envelope at all times in order to be valid
 - Yellow envelope = time varying data must be within limits at right end
 - Black threshold (Solid) = time varying data must not exceed this threshold in order to be valid
 - Black threshold (Dashed) = for reference only – this can include warning level thresholds which are used to determine the timing of the alert
2. Instantaneous sampling color codes:
 - Green circle = passing or valid value at a given moment in time
 - Red asterisk = failing or invalid value at a given moment in time

3. Text color codes:


- Green = passing or valid value
- Red = failing or invalid value

Other Notations

- NG – Indicates that the value for that variable was outside of bounds and therefore “No Good”.
- No Wng – No warning was detected.


The minimum (worst) GPS fix type is displayed in the lower right corner of each page. The only valid fix type is RTK fixed (displayed in green). If the fix type during any portion of the test was anything other than RTK fixed, then “RTK Fixed OR LESS!!” is displayed in red.

Examples of time history plots (including passing, failing and invalid runs) are shown in Figure D1 through Figure D3. Actual time history data plots for the vehicle under consideration are provided subsequently.

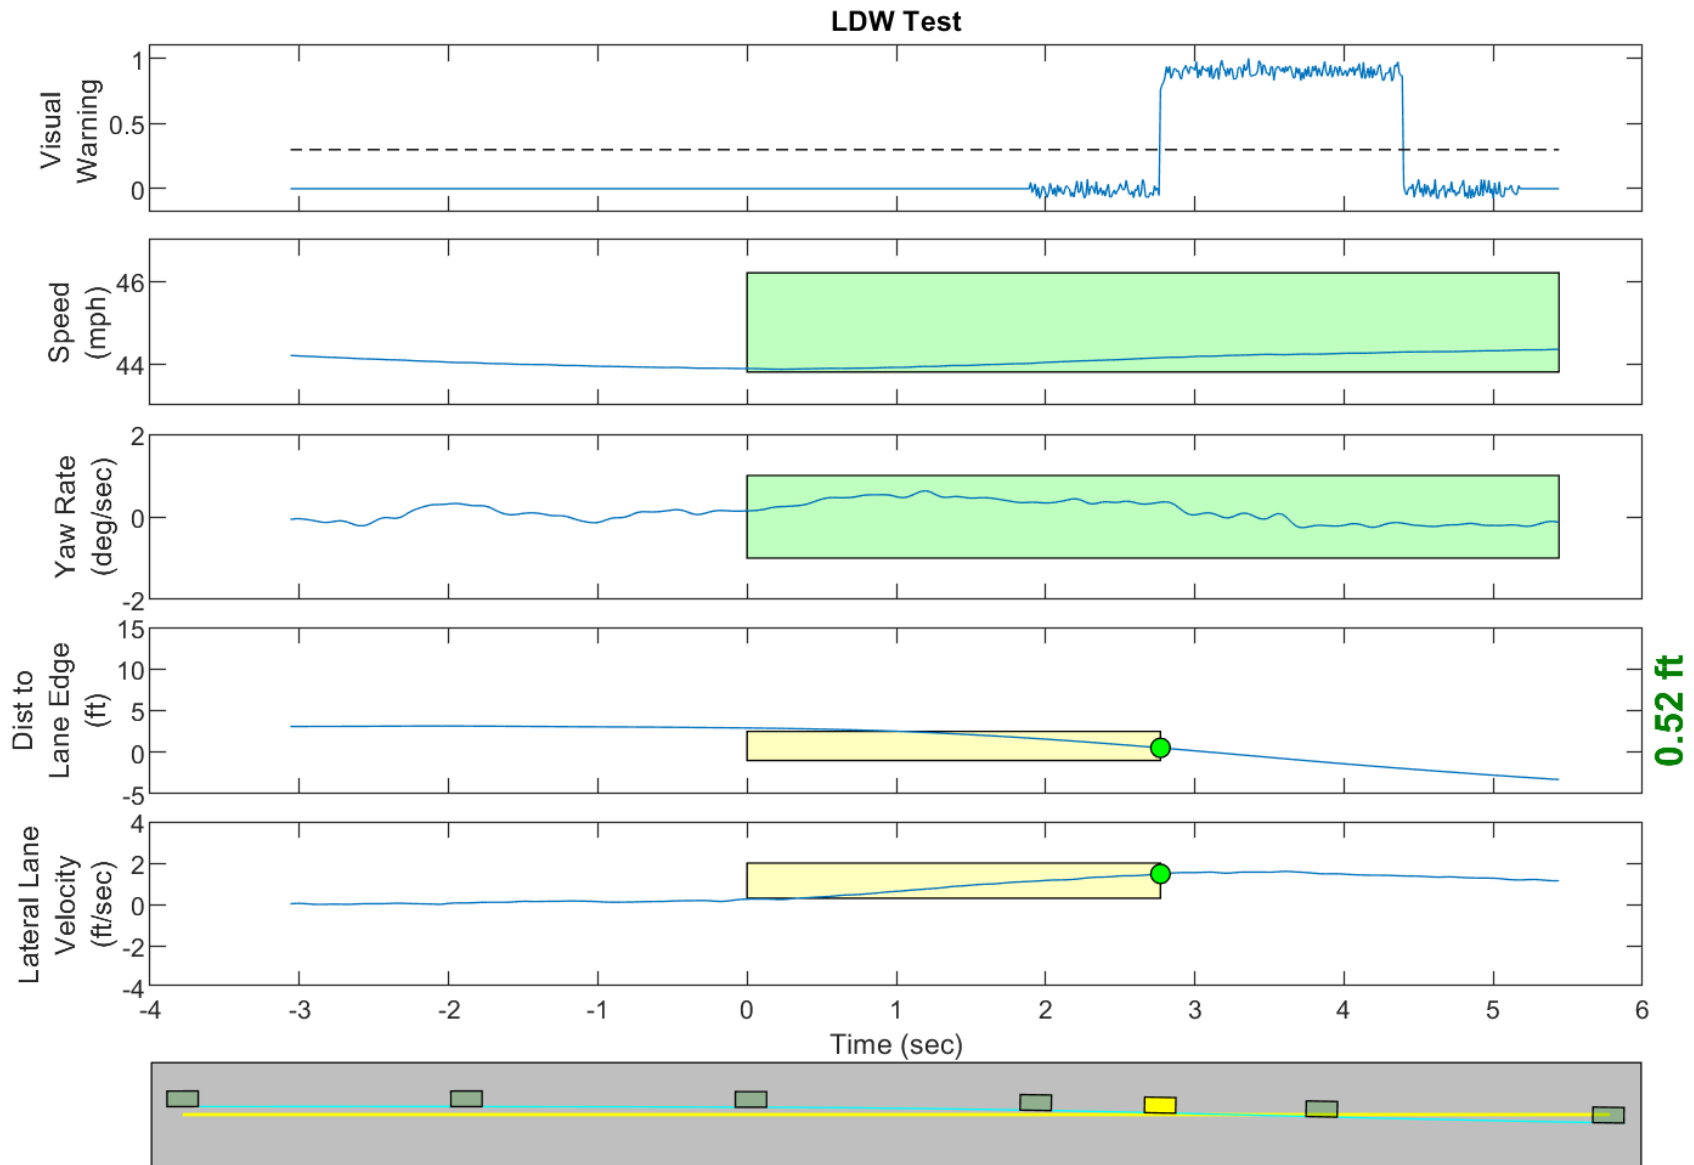


GPS Fix Type: RTK Fixed

Figure D1. Example Time History for Lane Departure Warning Test, Passing

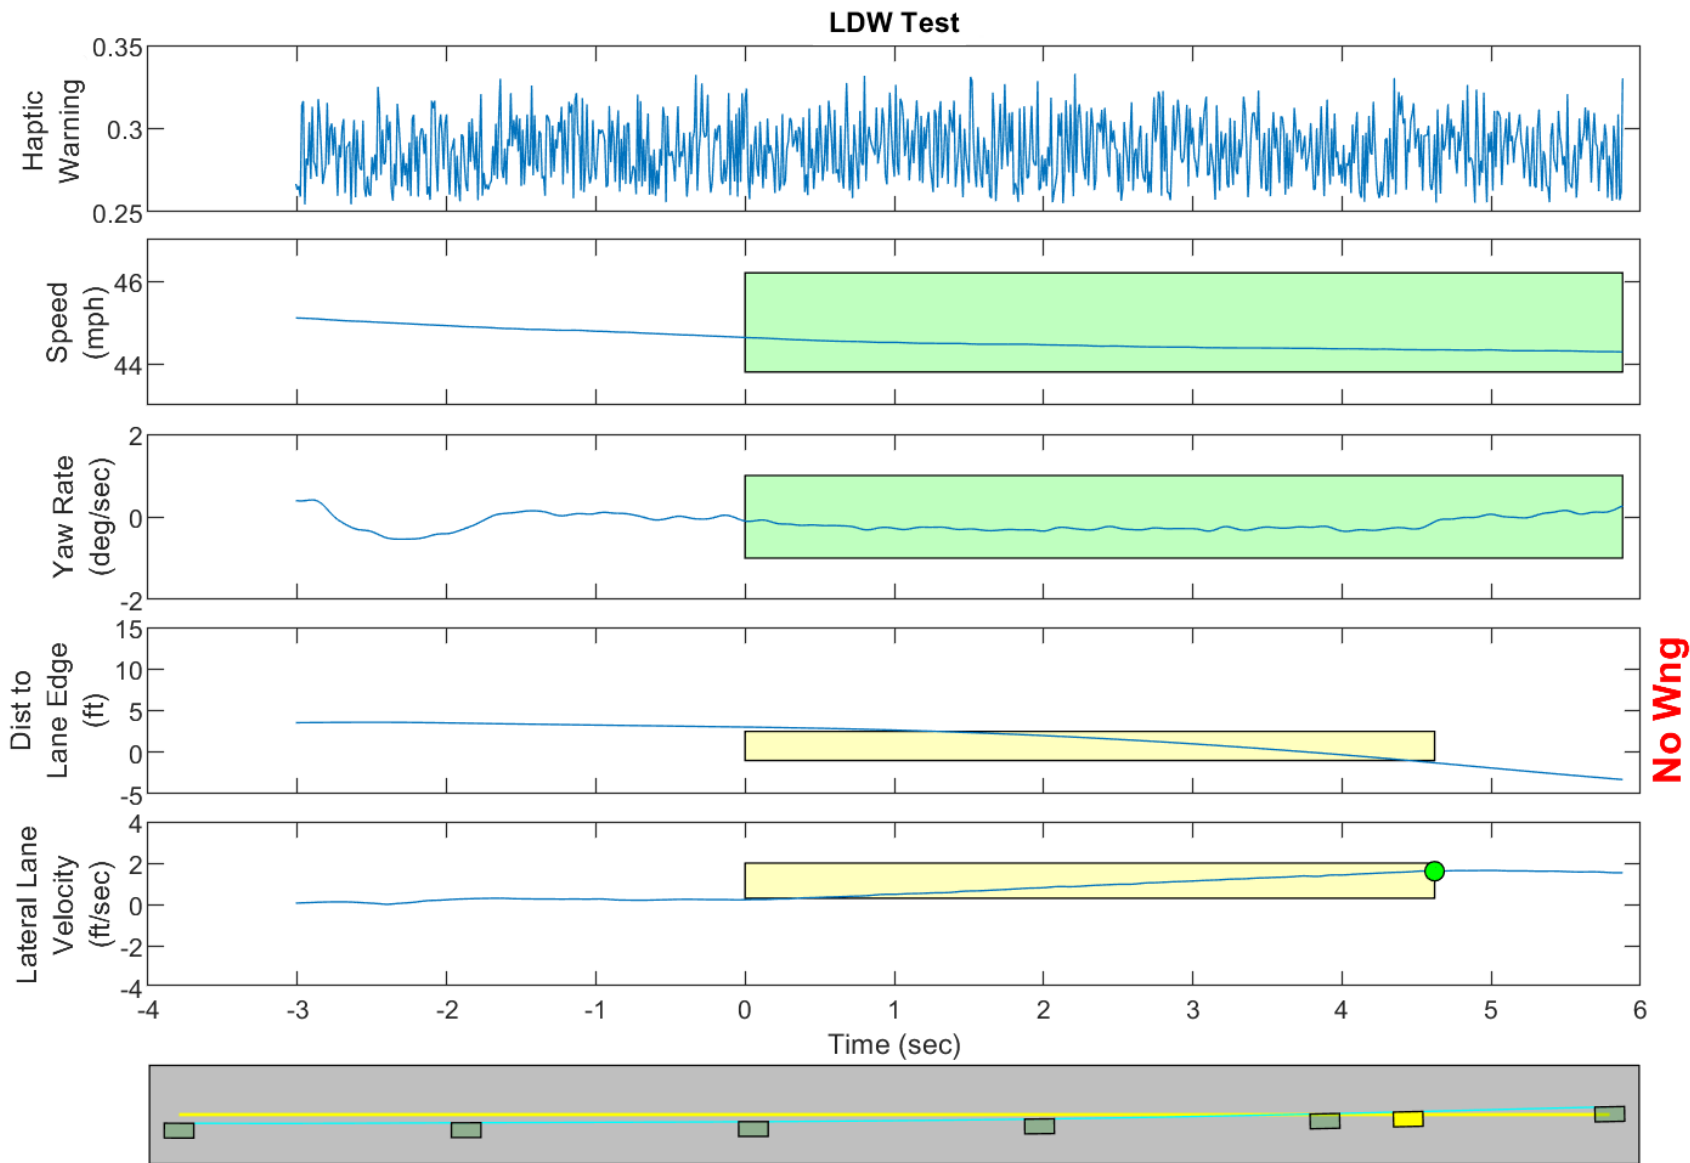


GPS Fix Type: RTK Fixed

Figure D2. Example Time History for Lane Departure Warning Test, Failing, No Warning Issued

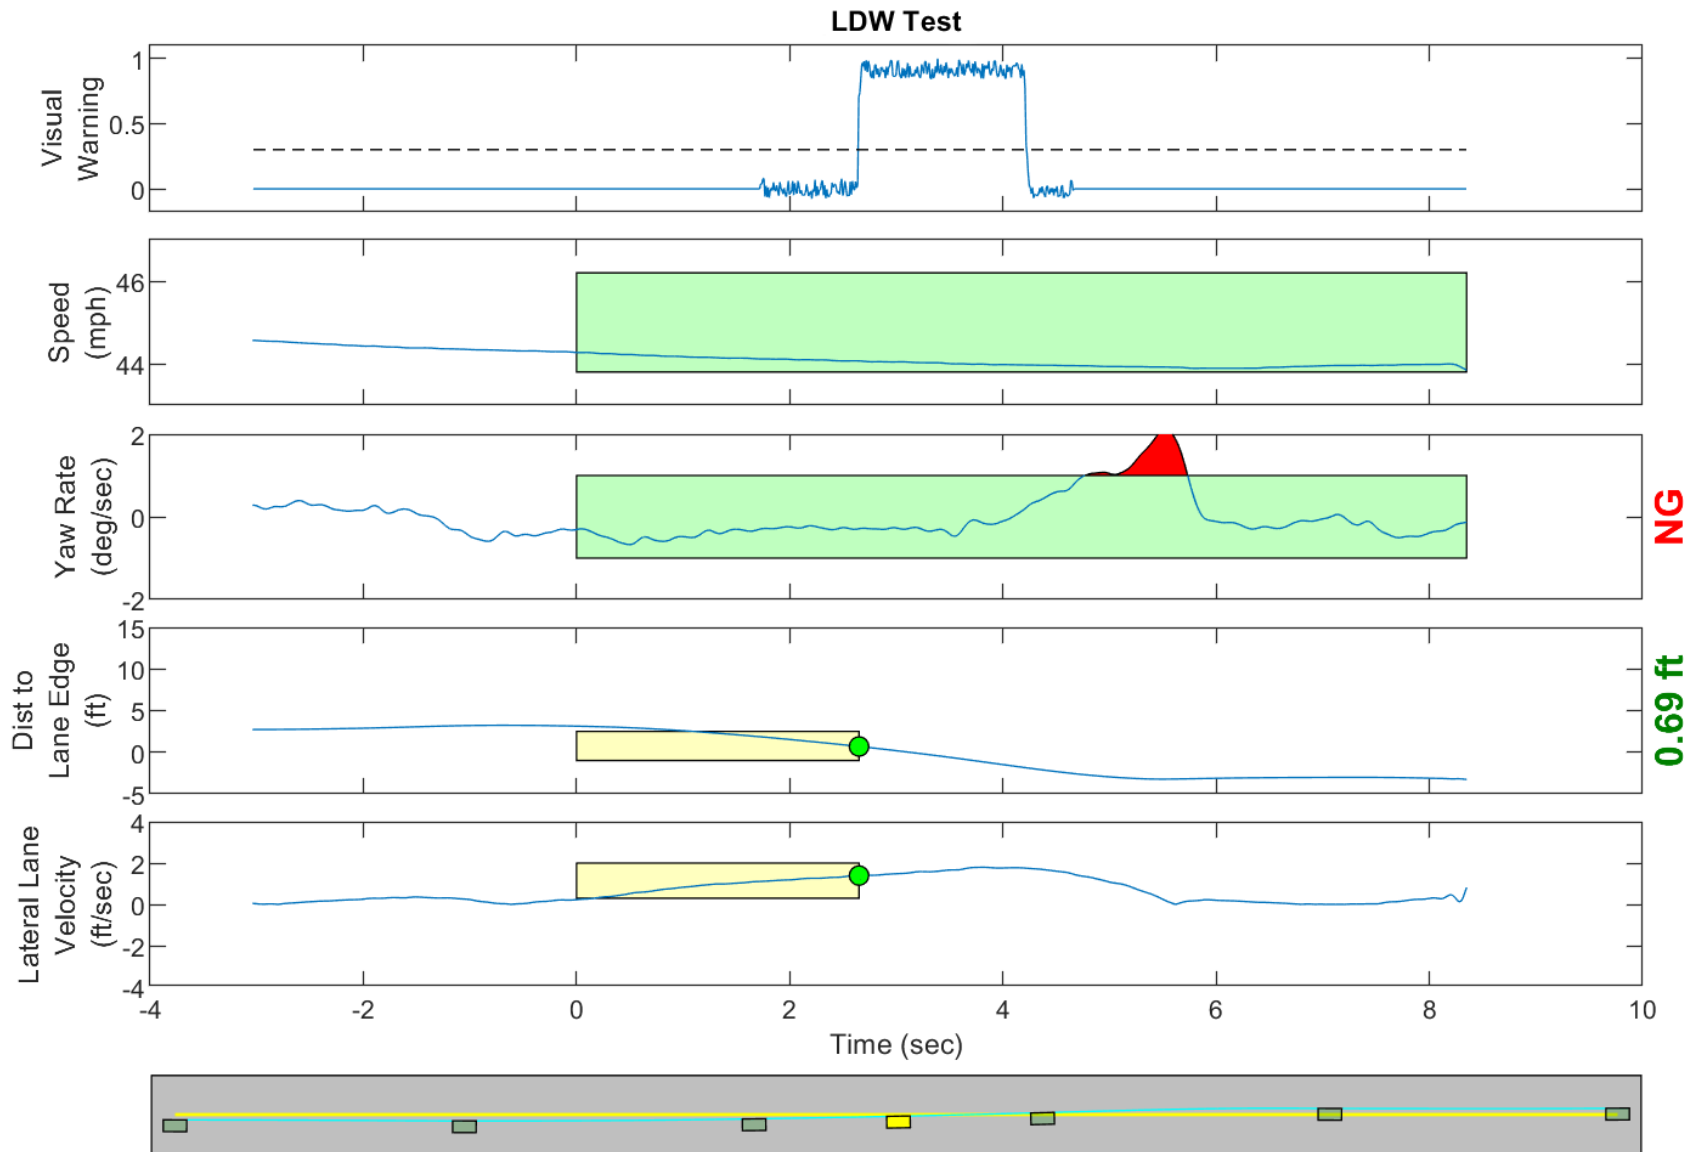


GPS Fix Type: RTK Fixed

Figure D3. Example Time History for Lane Departure Warning Test, Invalid Run Due to Subject Vehicle Yaw Rate

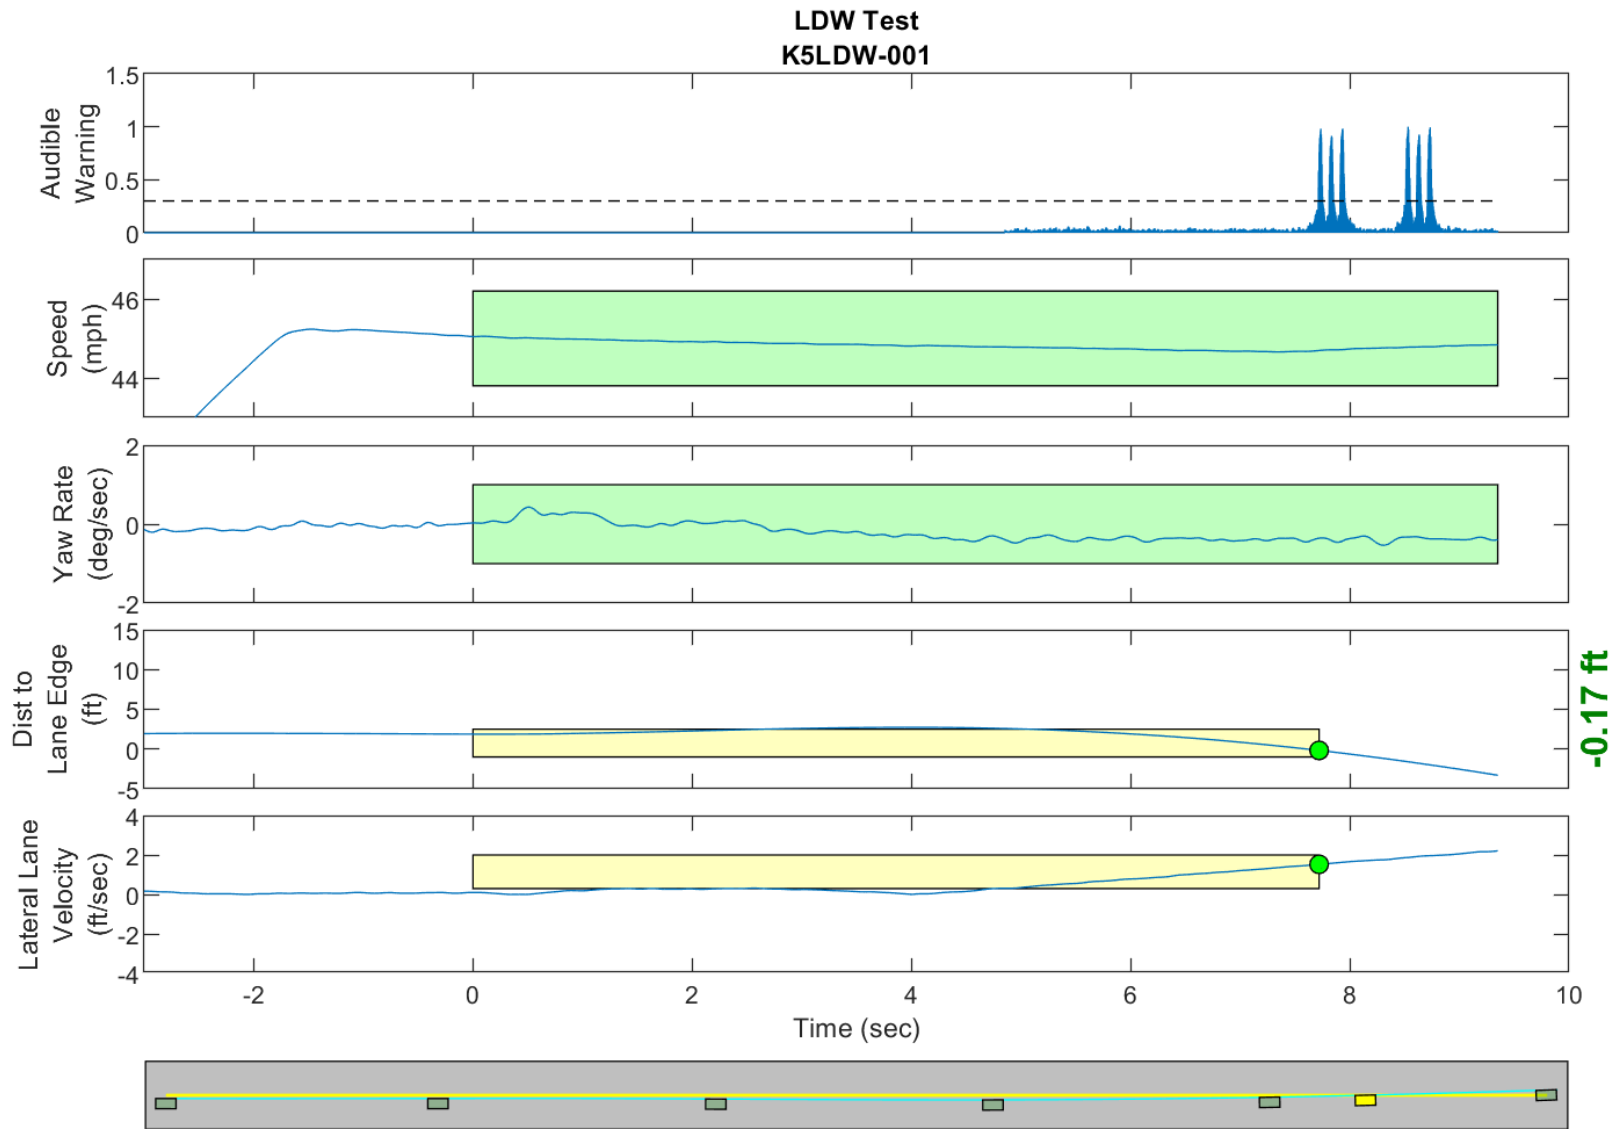


GPS Fix Type: RTK Fixed

Figure D4. Time History for Run 01, Solid Line, Left Departure, Audible Warning

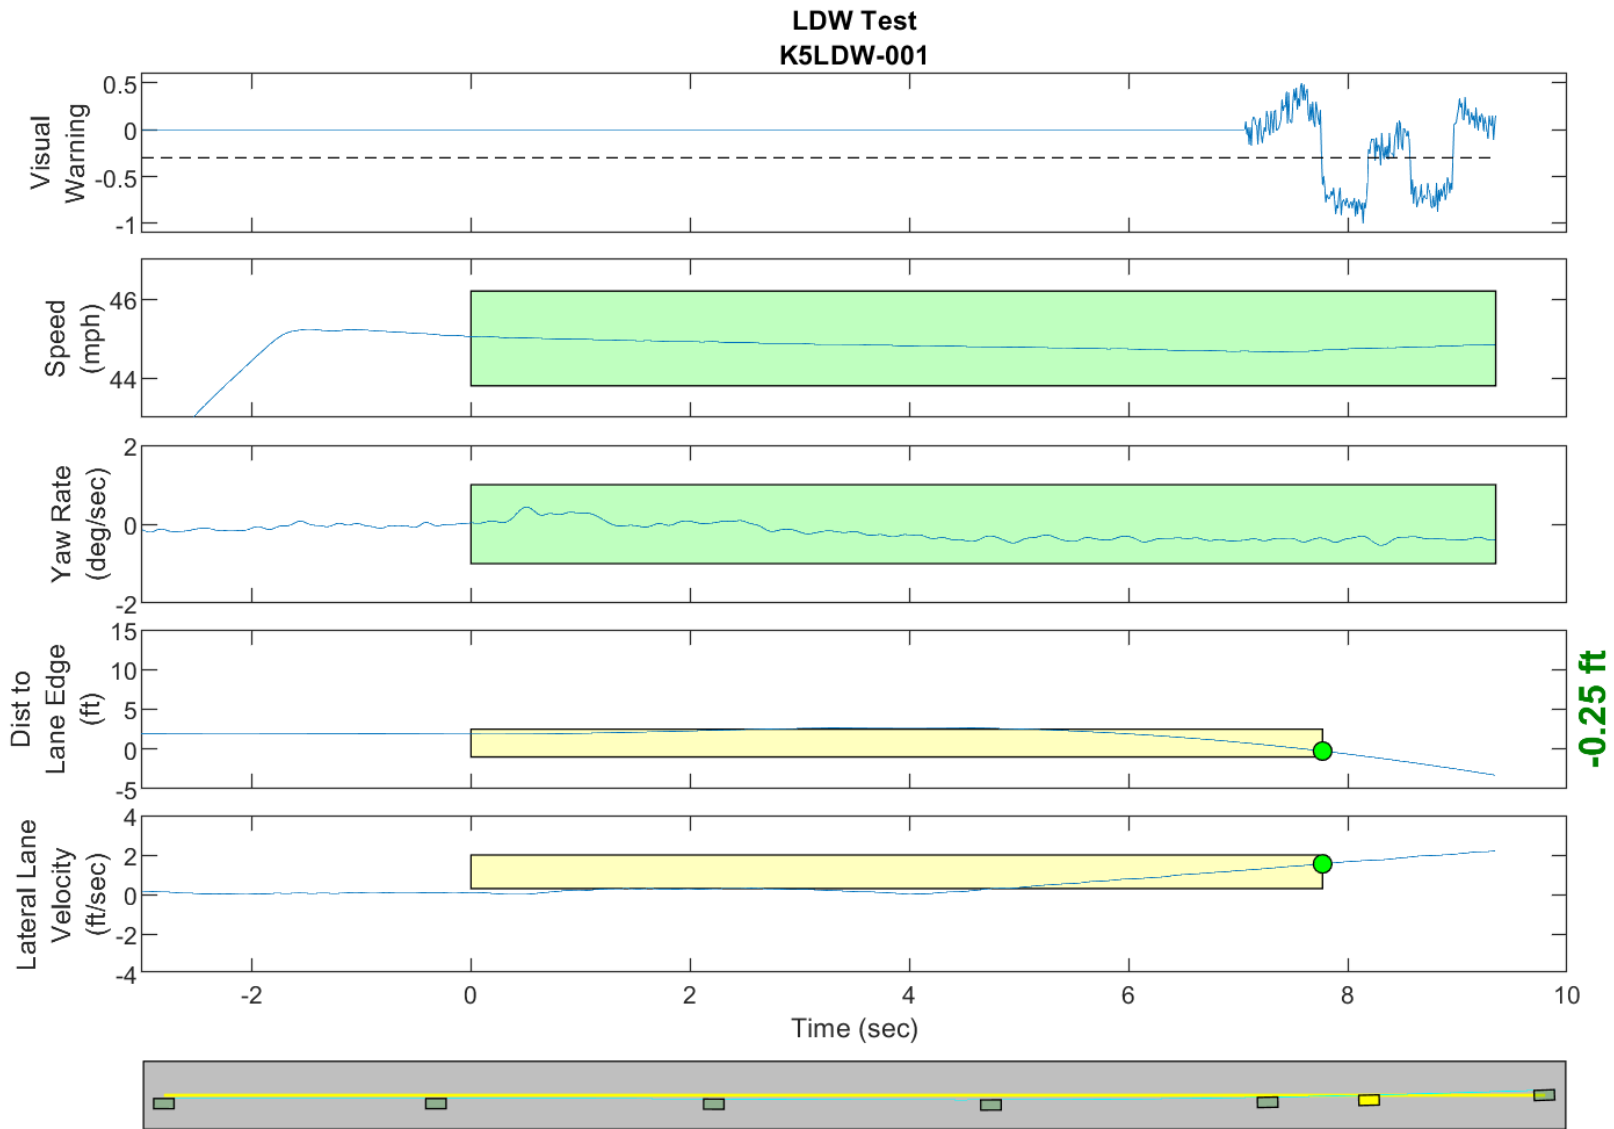


GPS Fix Type: RTK Fixed

Figure D5. Time History for Run 01, Solid Line, Left Departure, Visual Warning

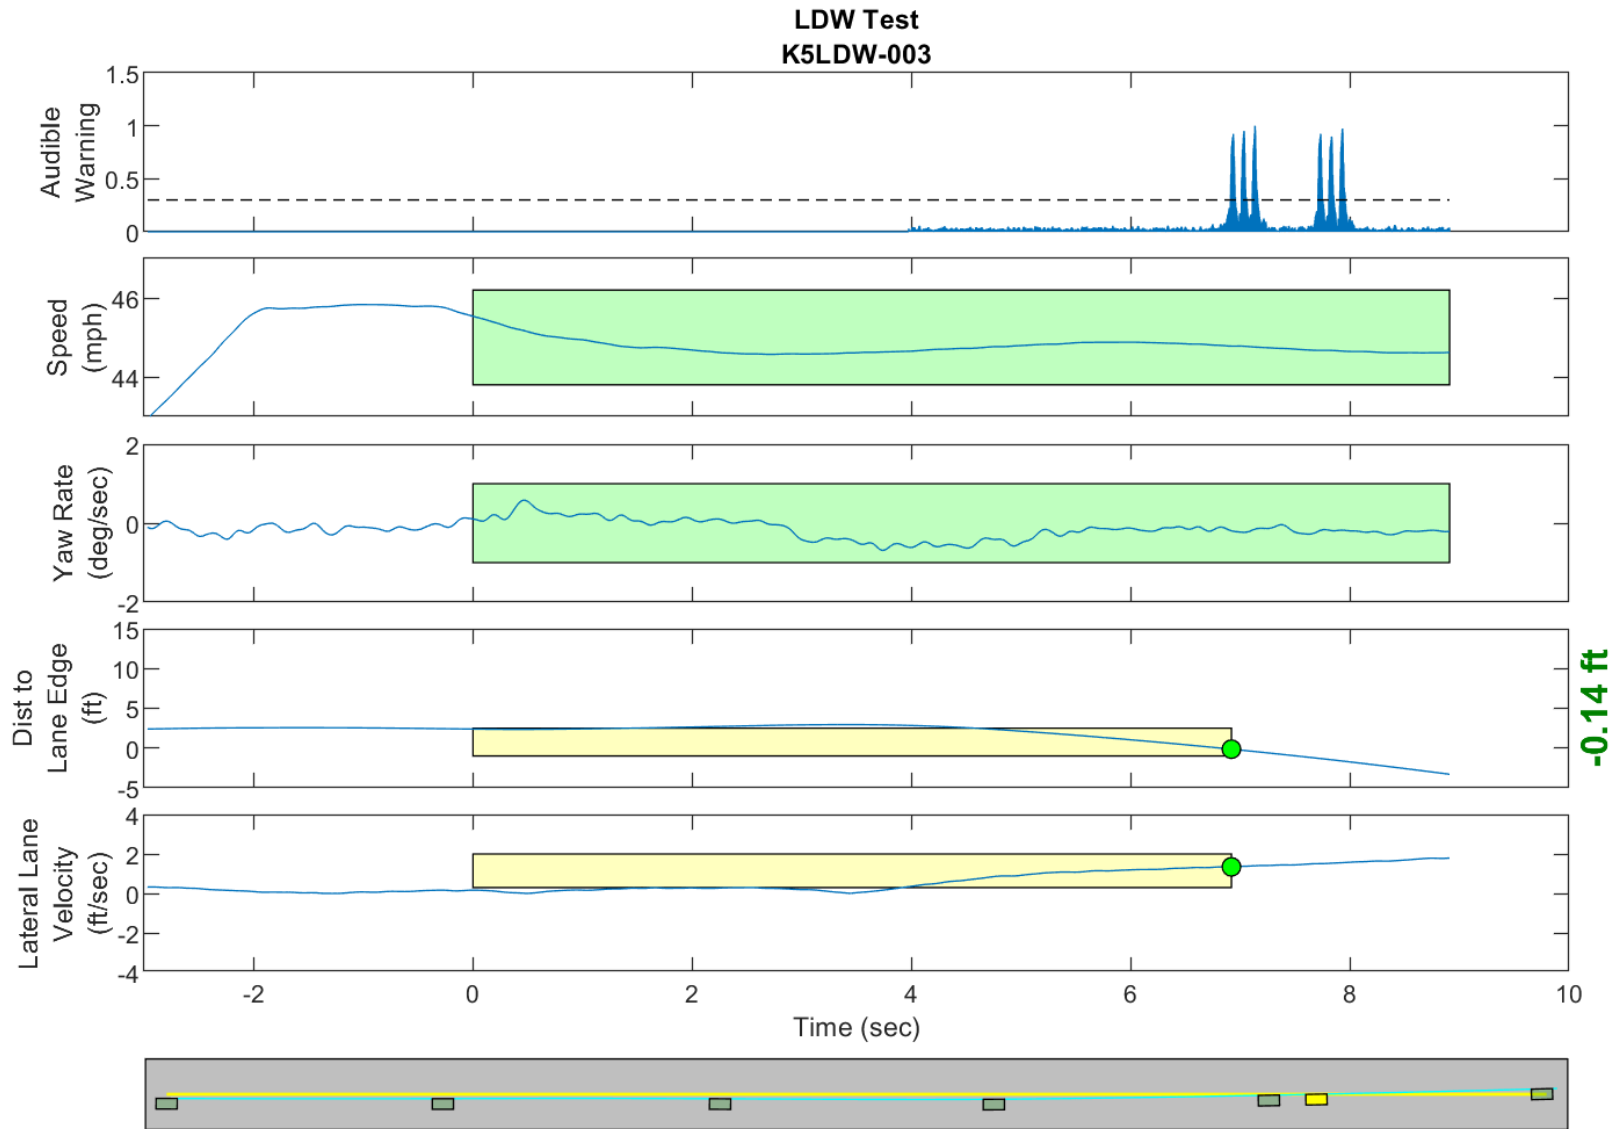


GPS Fix Type: RTK Fixed

Figure D6. Time History for Run 03, Solid Line, Left Departure, Audible Warning

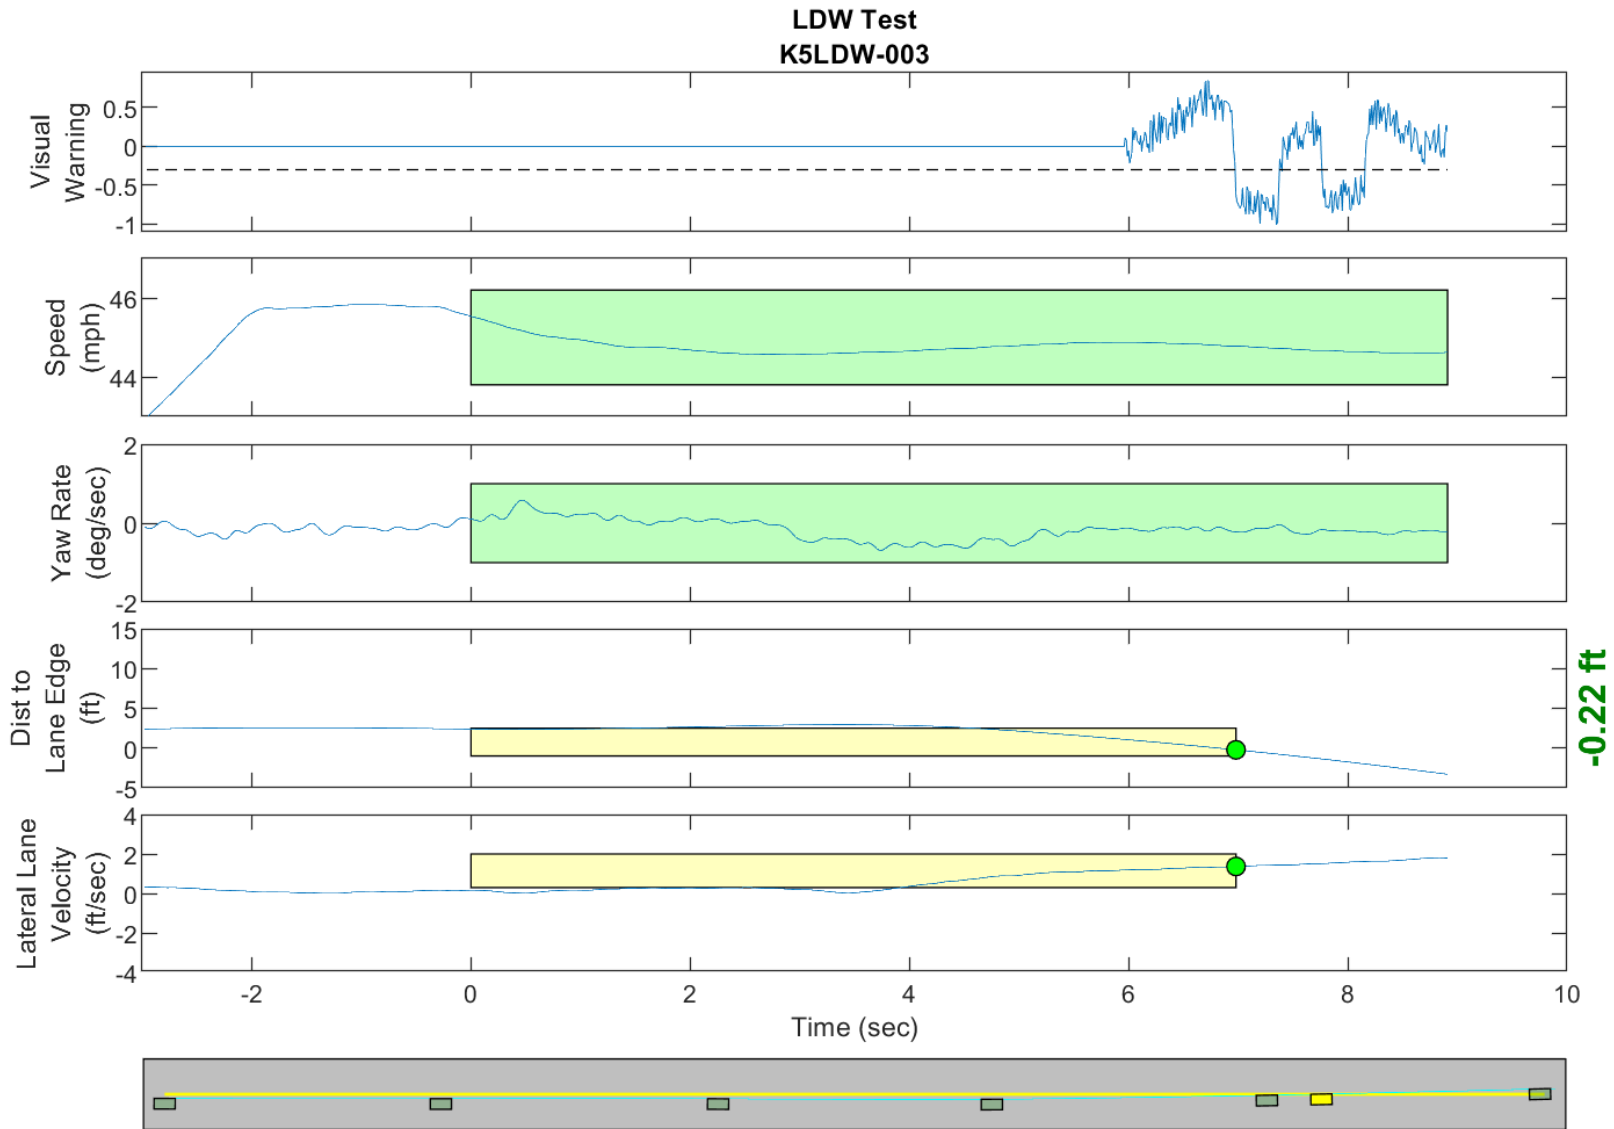


GPS Fix Type: RTK Fixed

Figure D7. Time History for Run 03, Solid Line, Left Departure, Visual Warning

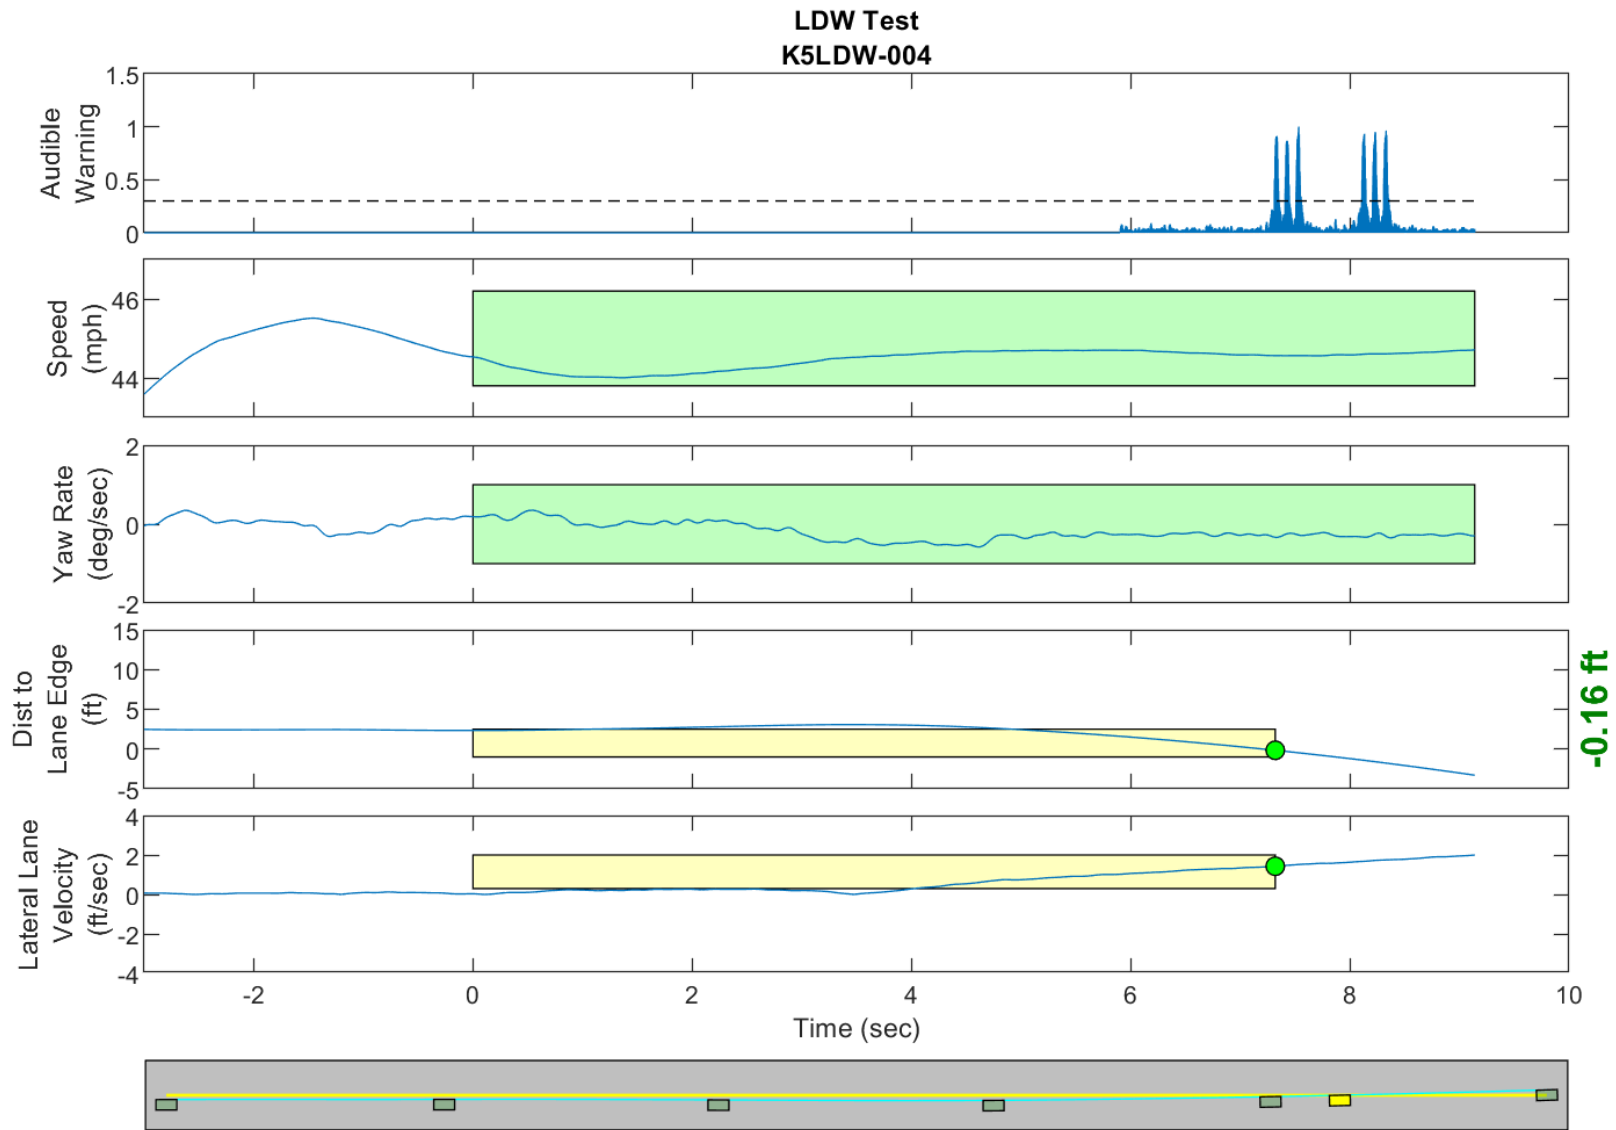


GPS Fix Type: RTK Fixed

Figure D8. Time History for Run 04, Solid Line, Left Departure, Audible Warning

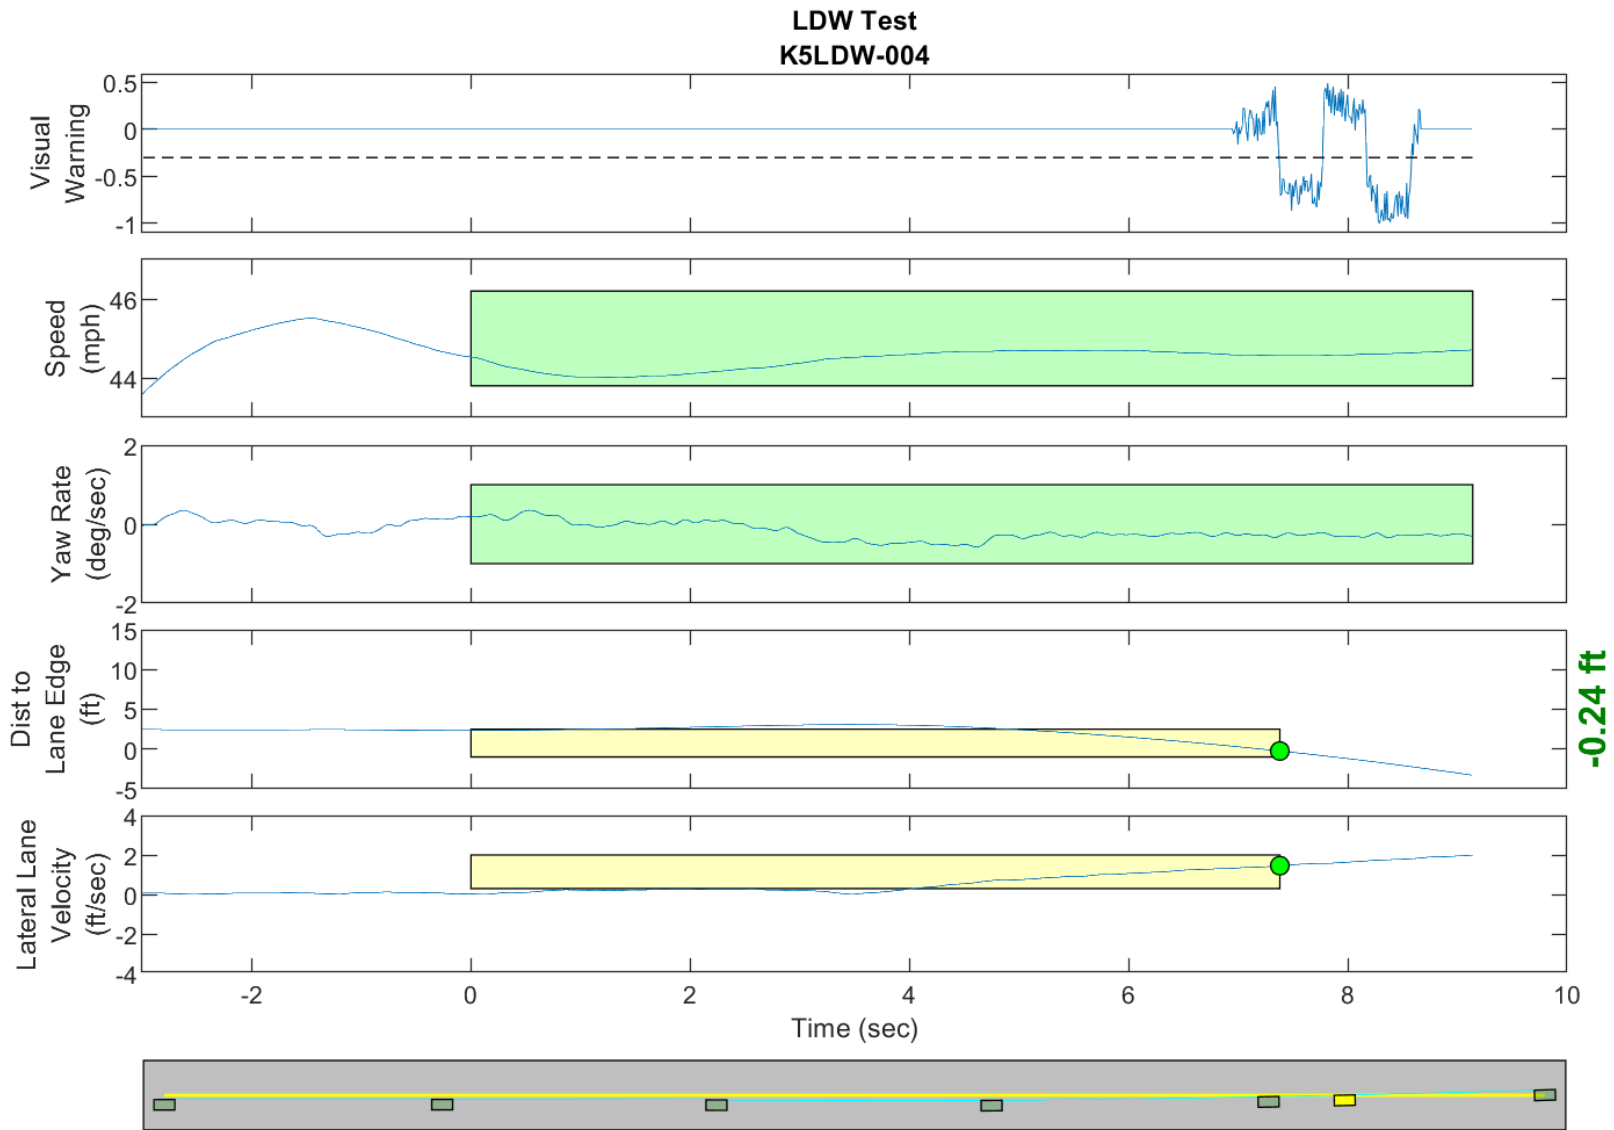


GPS Fix Type: RTK Fixed

Figure D9. Time History for Run 04, Solid Line, Left Departure, Visual Warning

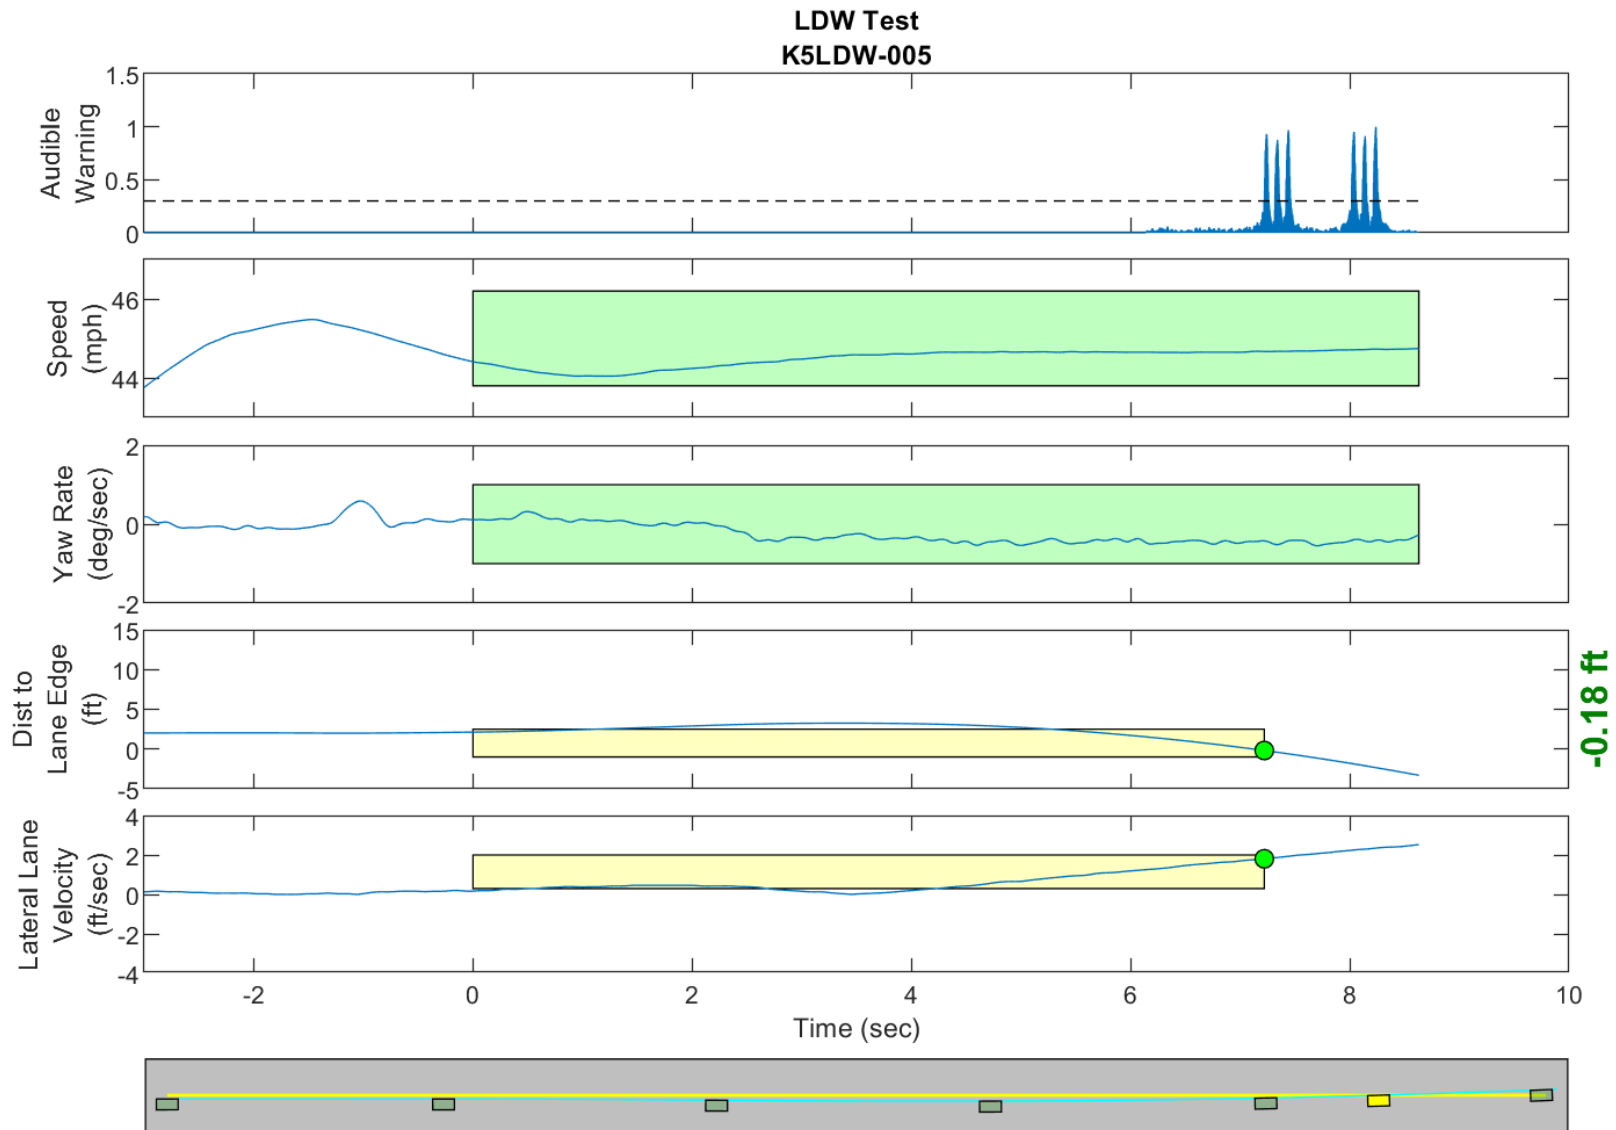


GPS Fix Type: RTK Fixed

Figure D10. Time History for Run 05, Solid Line, Left Departure, Audible Warning

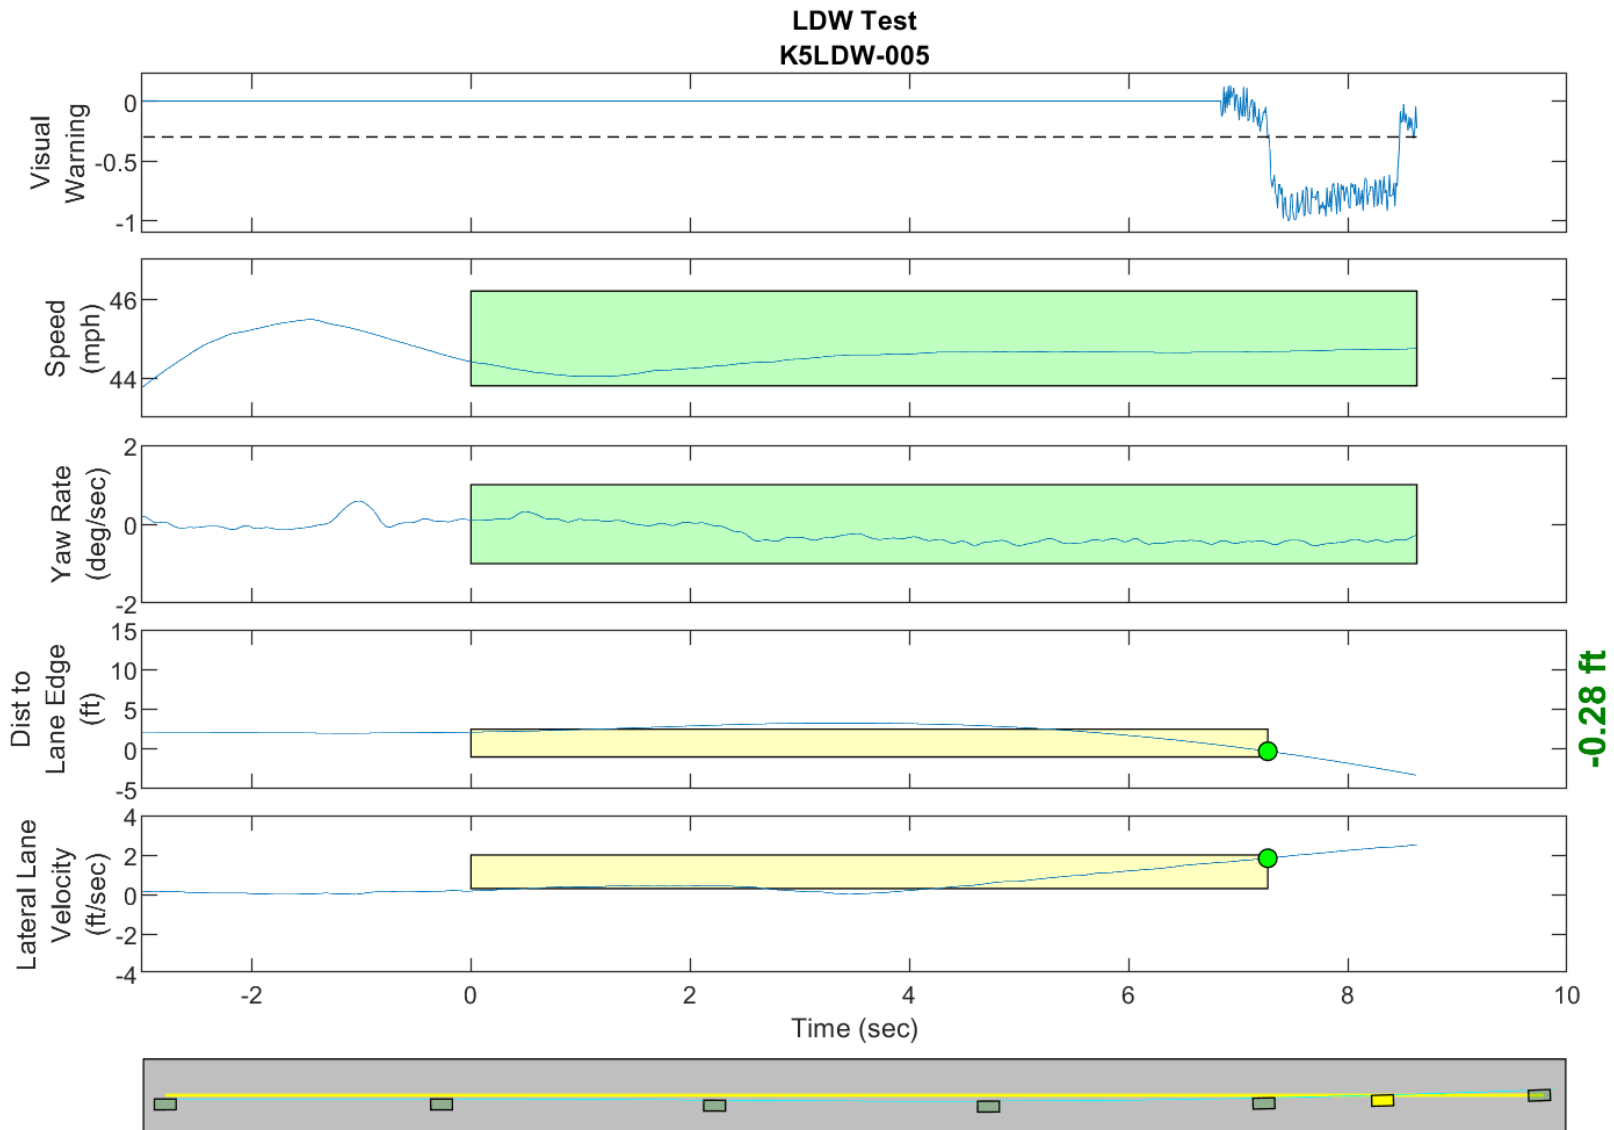


GPS Fix Type: RTK Fixed

Figure D11. Time History for Run 05, Solid Line, Left Departure, Visual Warning

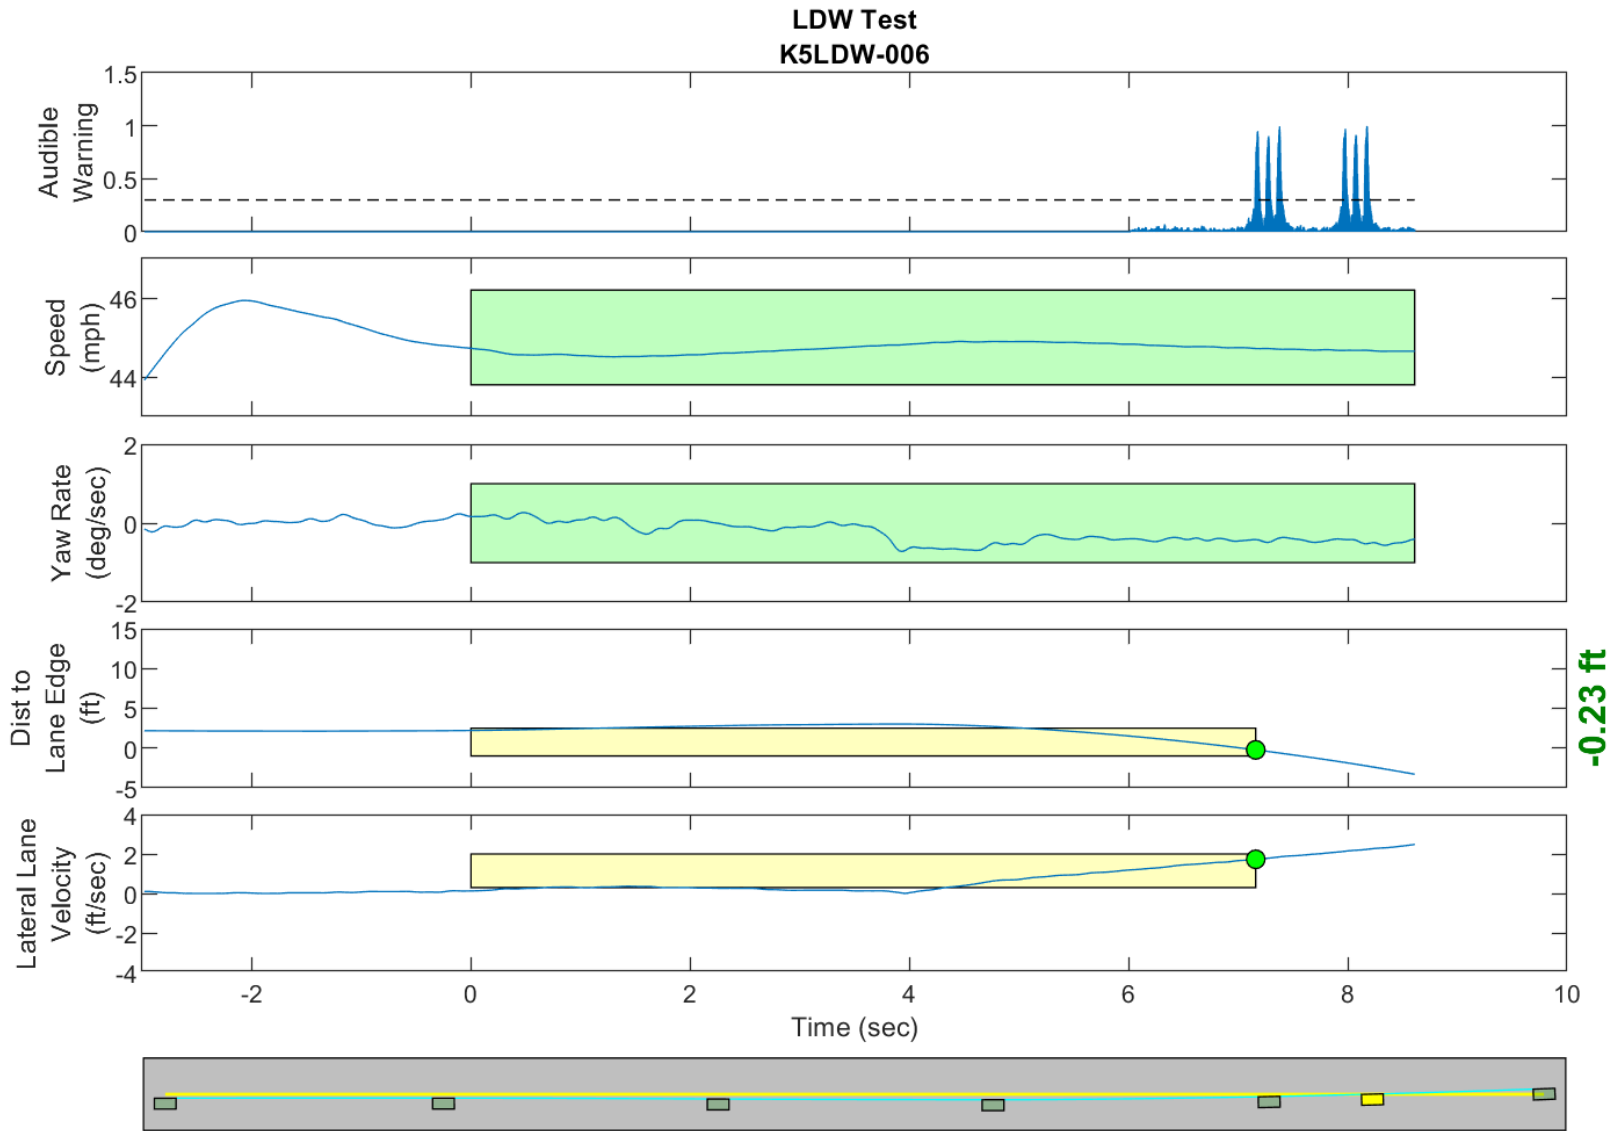


GPS Fix Type: RTK Fixed

Figure D12. Time History for Run 06, Solid Line, Left Departure, Audible Warning

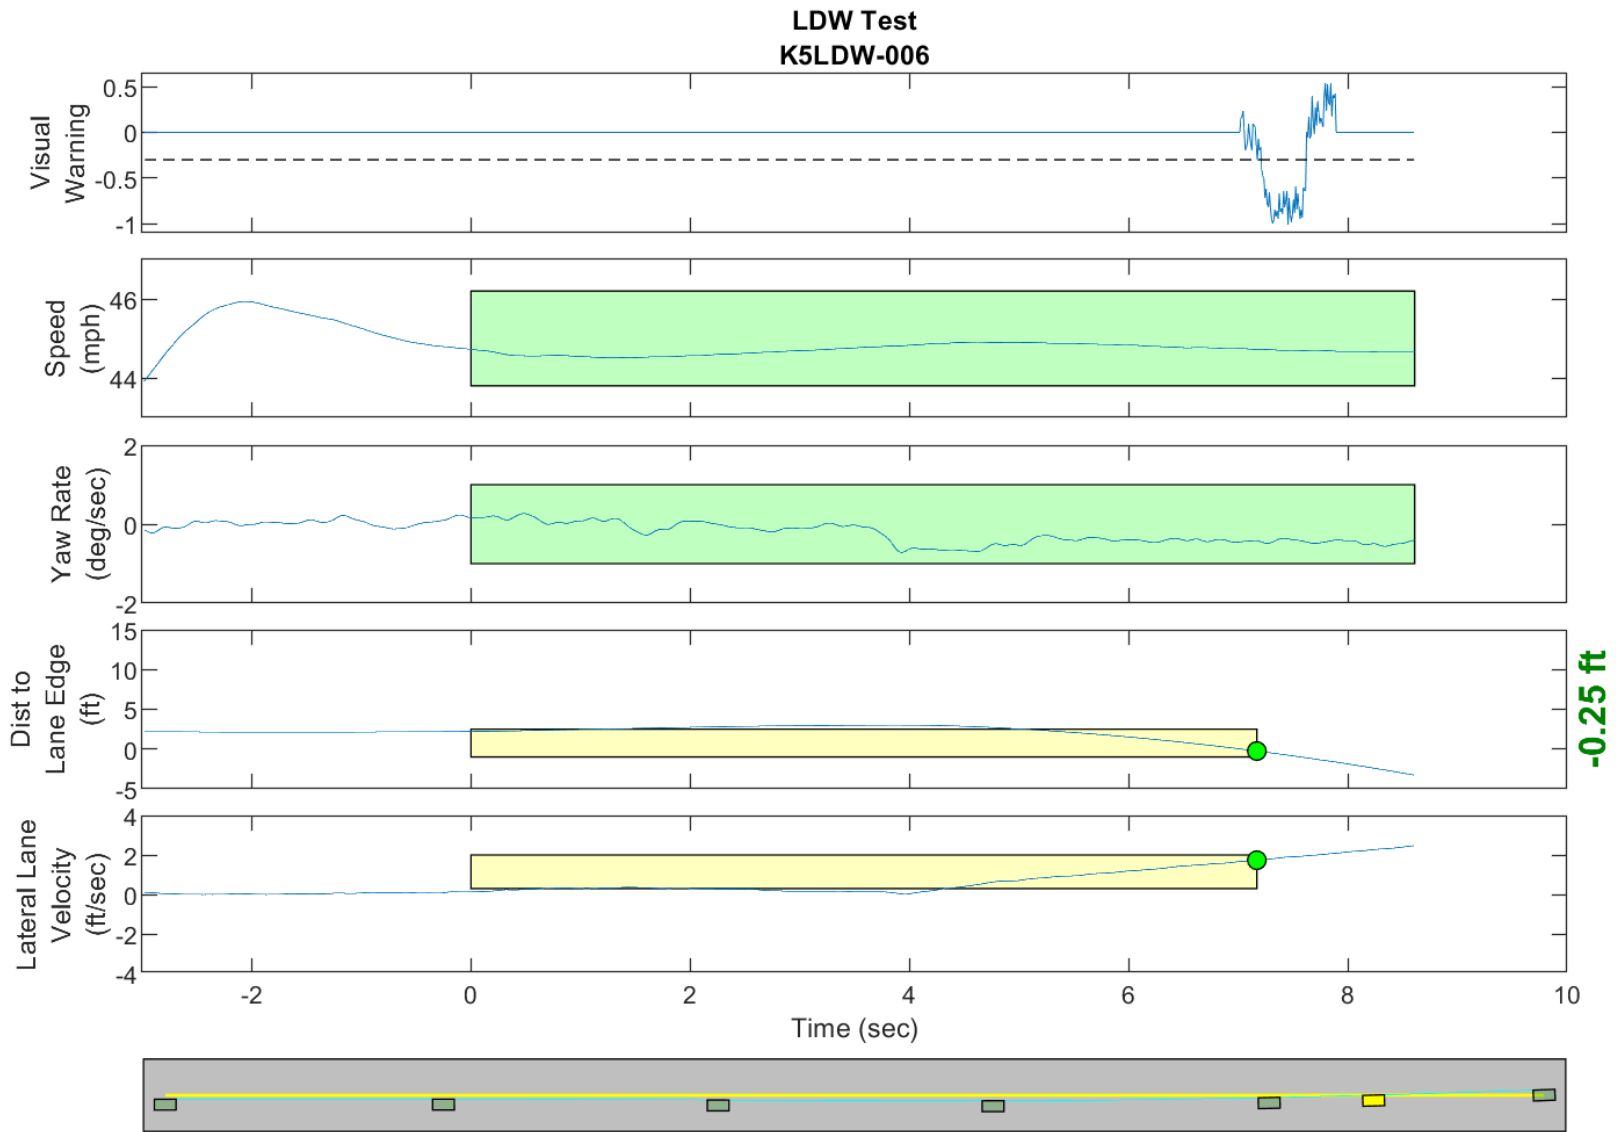


GPS Fix Type: RTK Fixed

Figure D13. Time History for Run 06, Solid Line, Left Departure, Visual Warning

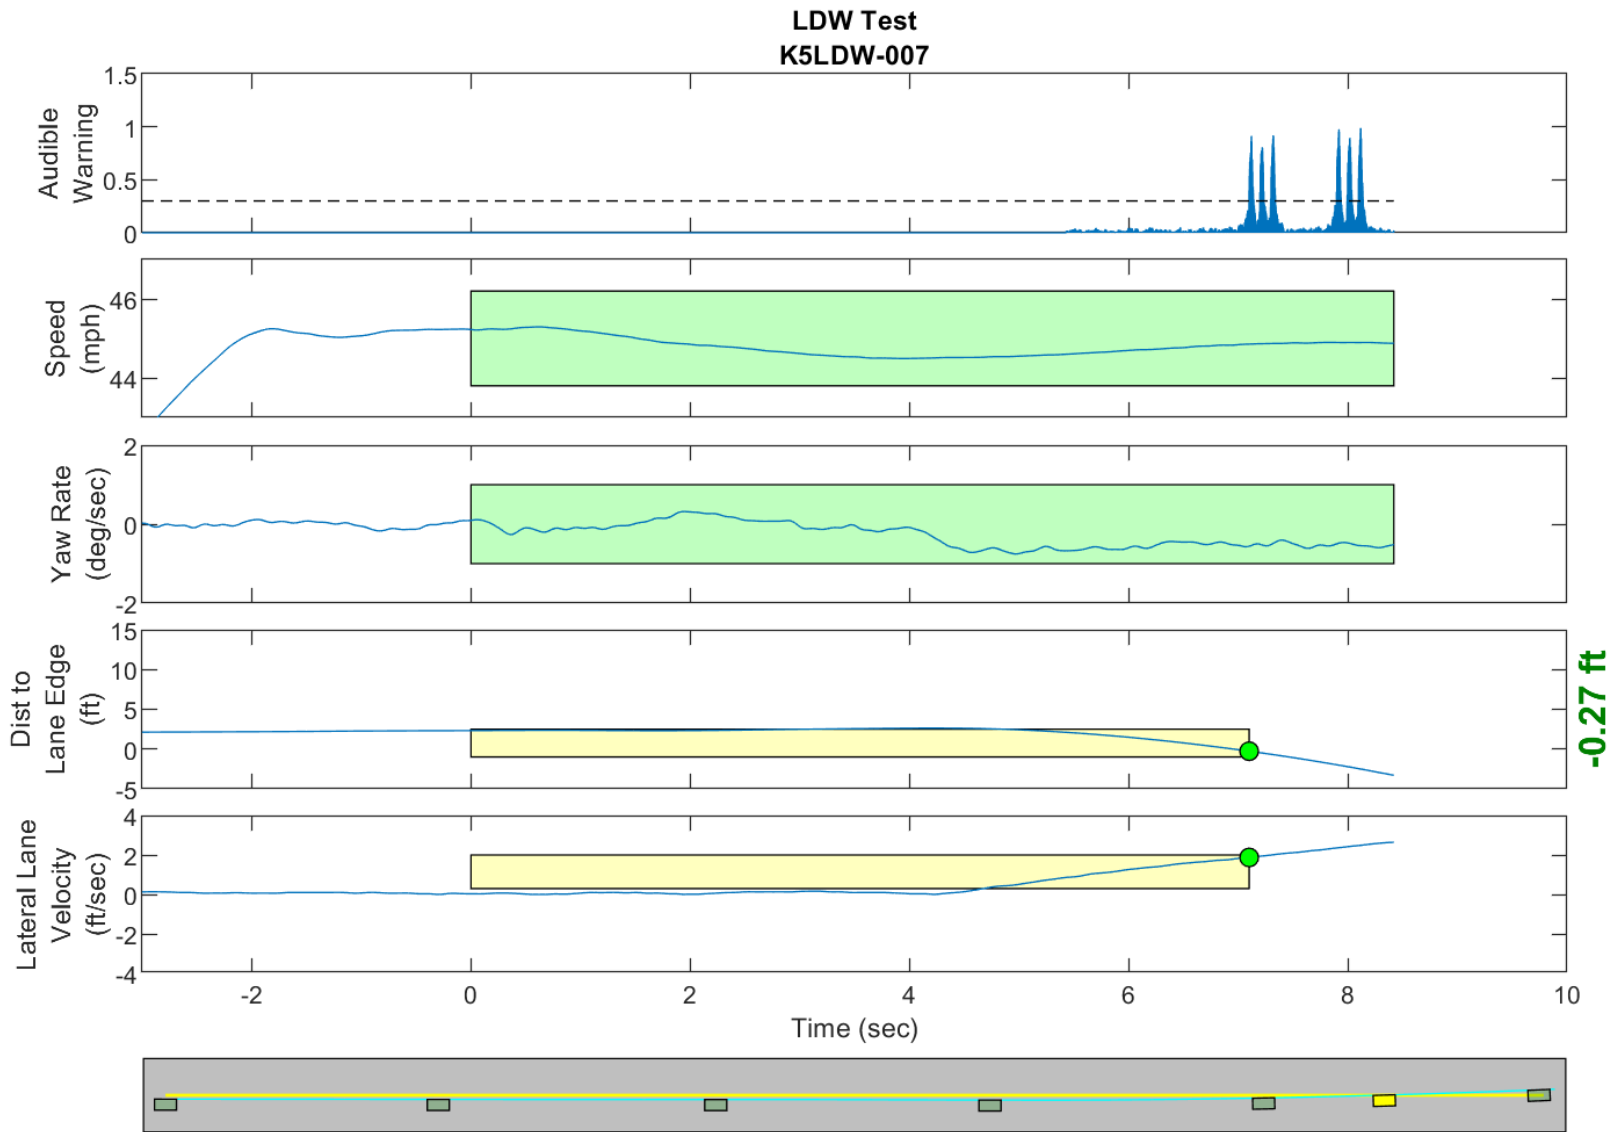


GPS Fix Type: RTK Fixed

Figure D14. Time History for Run 07, Solid Line, Left Departure, Audible Warning

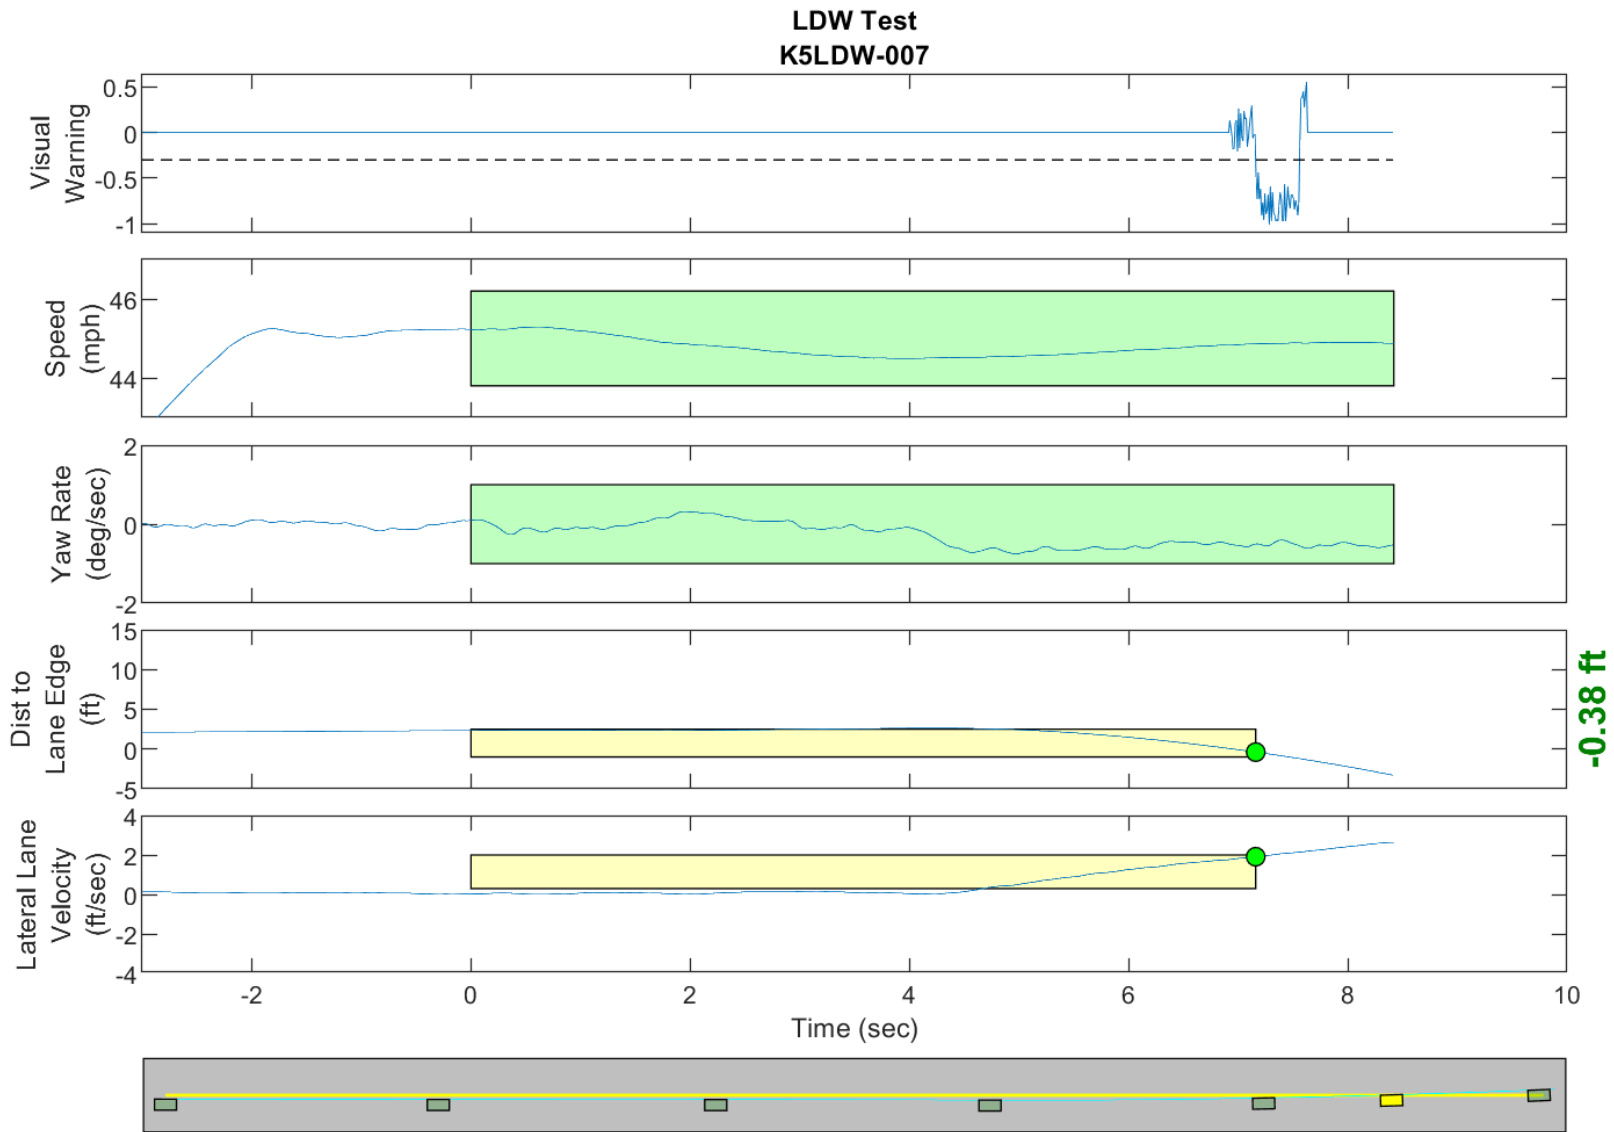


GPS Fix Type: RTK Fixed

Figure D15. Time History for Run 07, Solid Line, Left Departure, Visual Warning

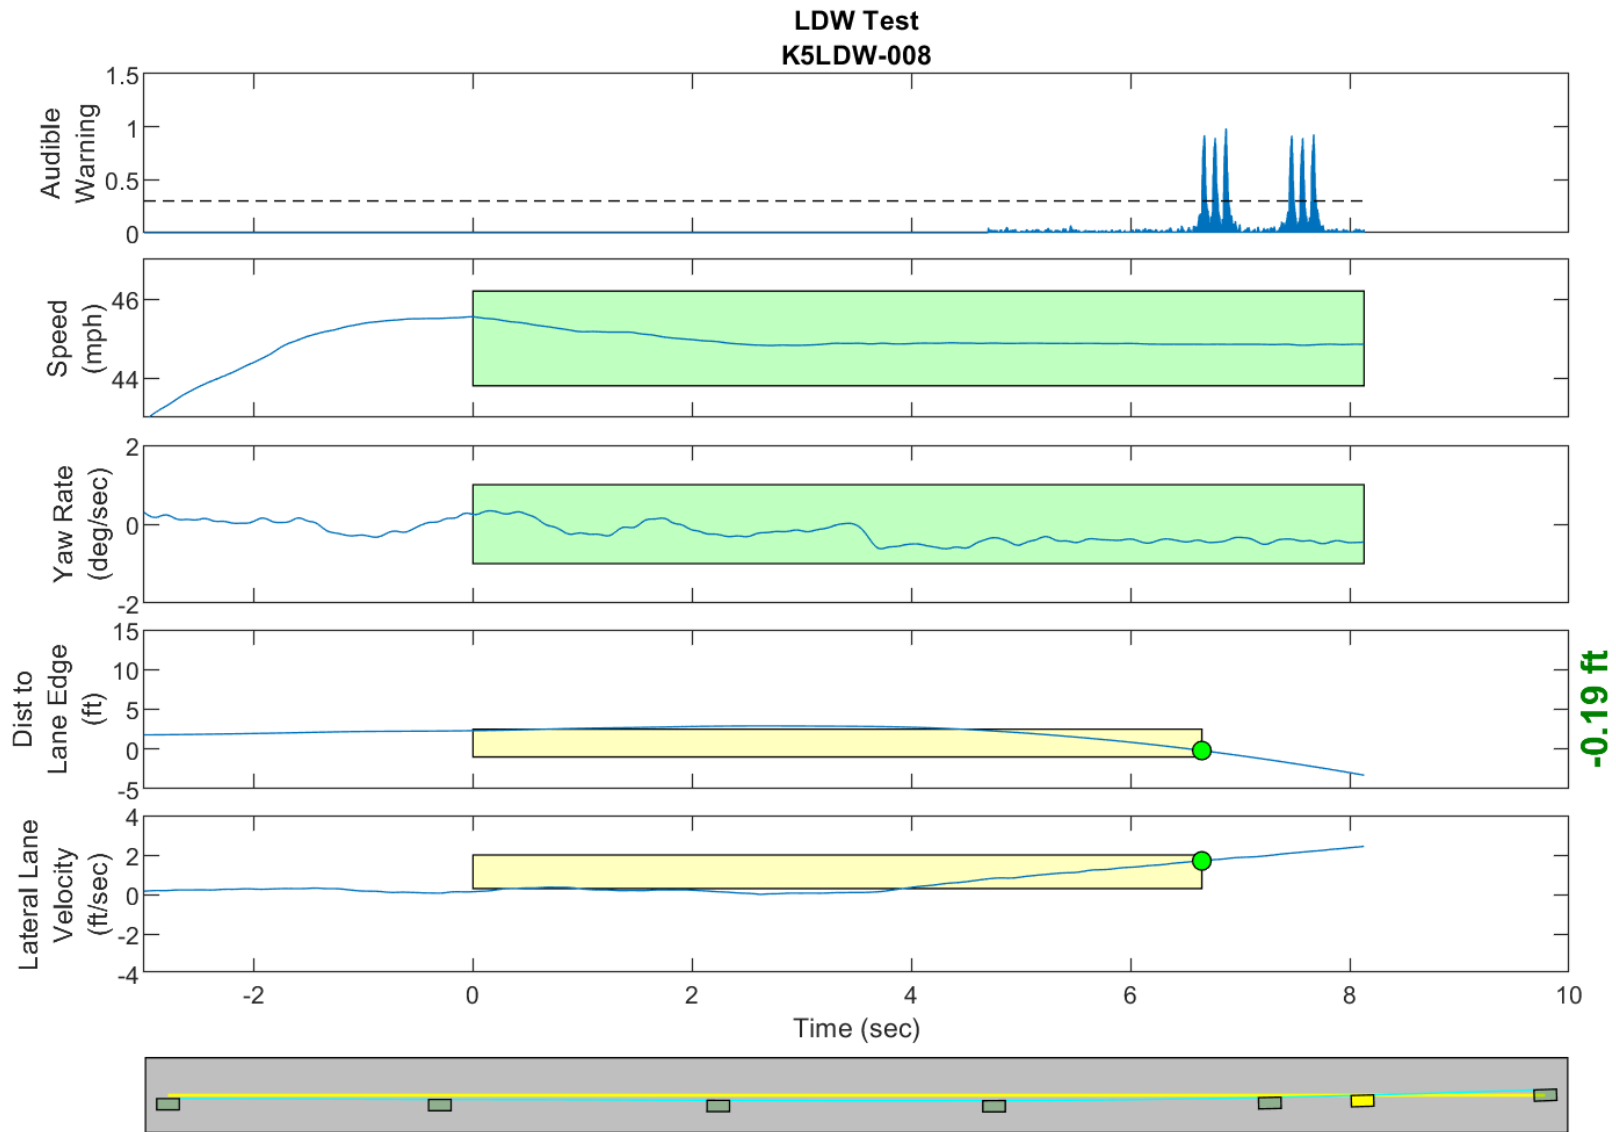


GPS Fix Type: RTK Fixed

Figure D16. Time History for Run 08, Solid Line, Left Departure, Audible Warning

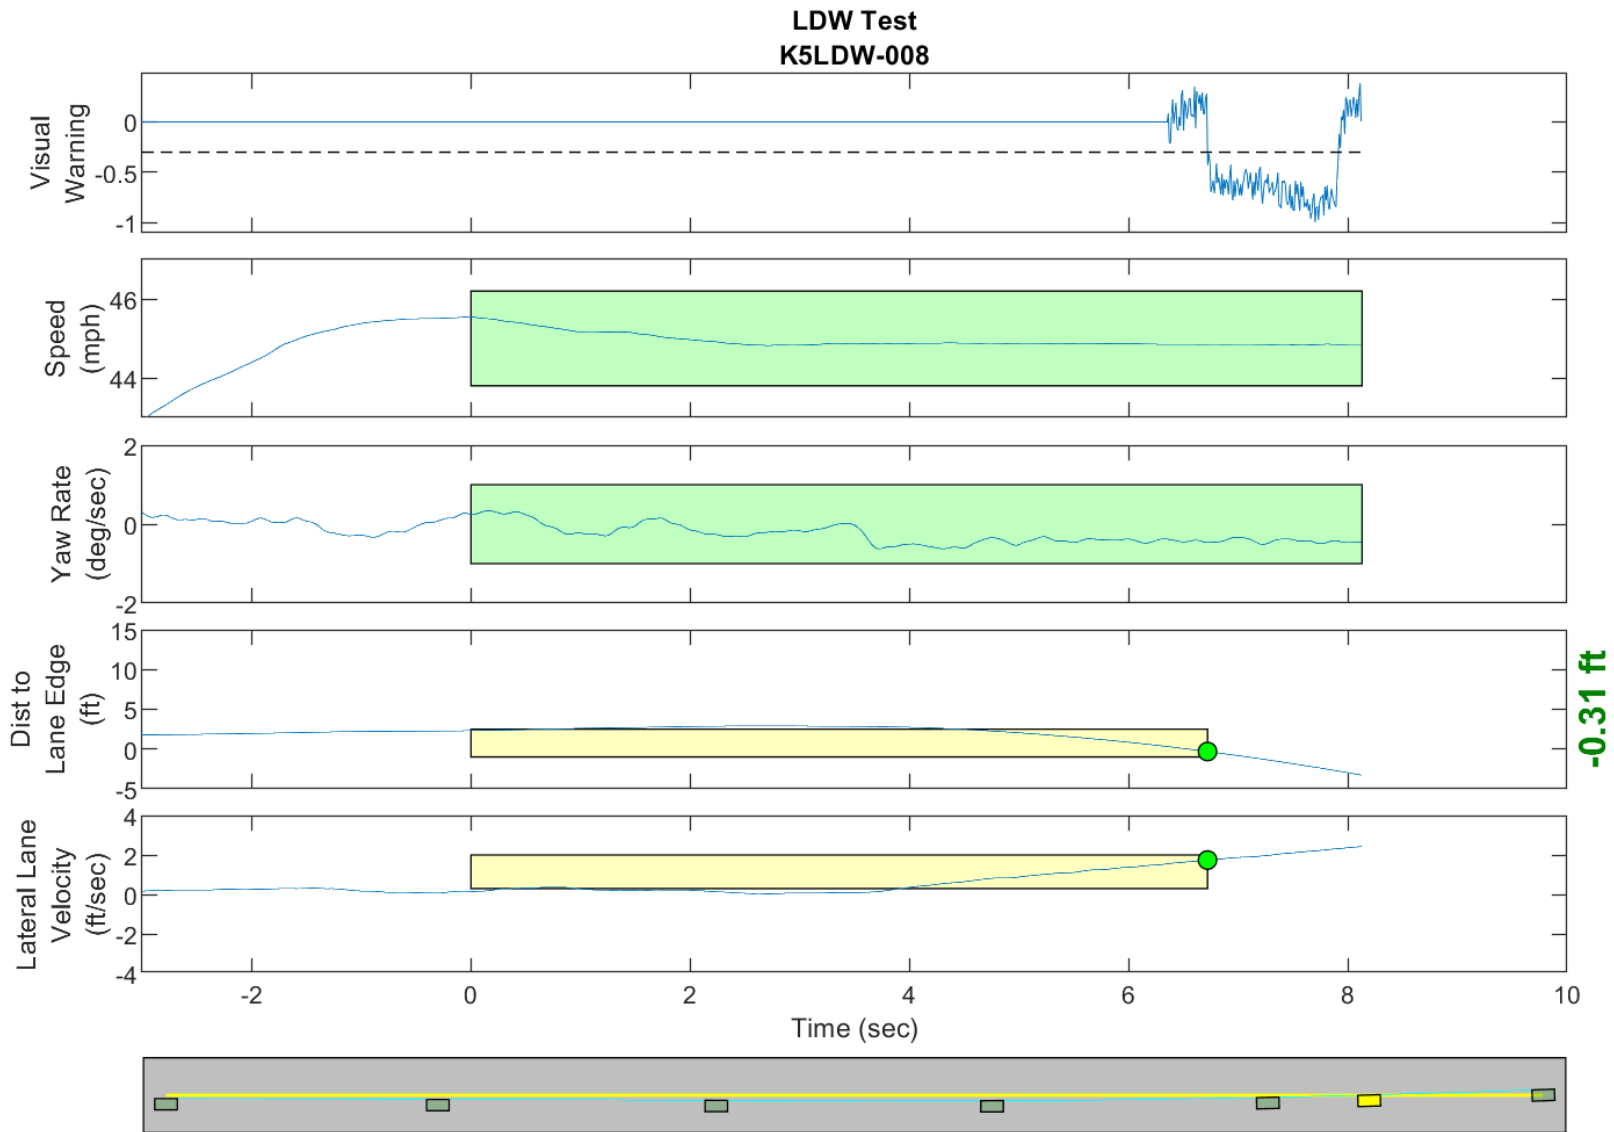


GPS Fix Type: RTK Fixed

Figure D17. Time History for Run 08, Solid Line, Left Departure, Visual Warning

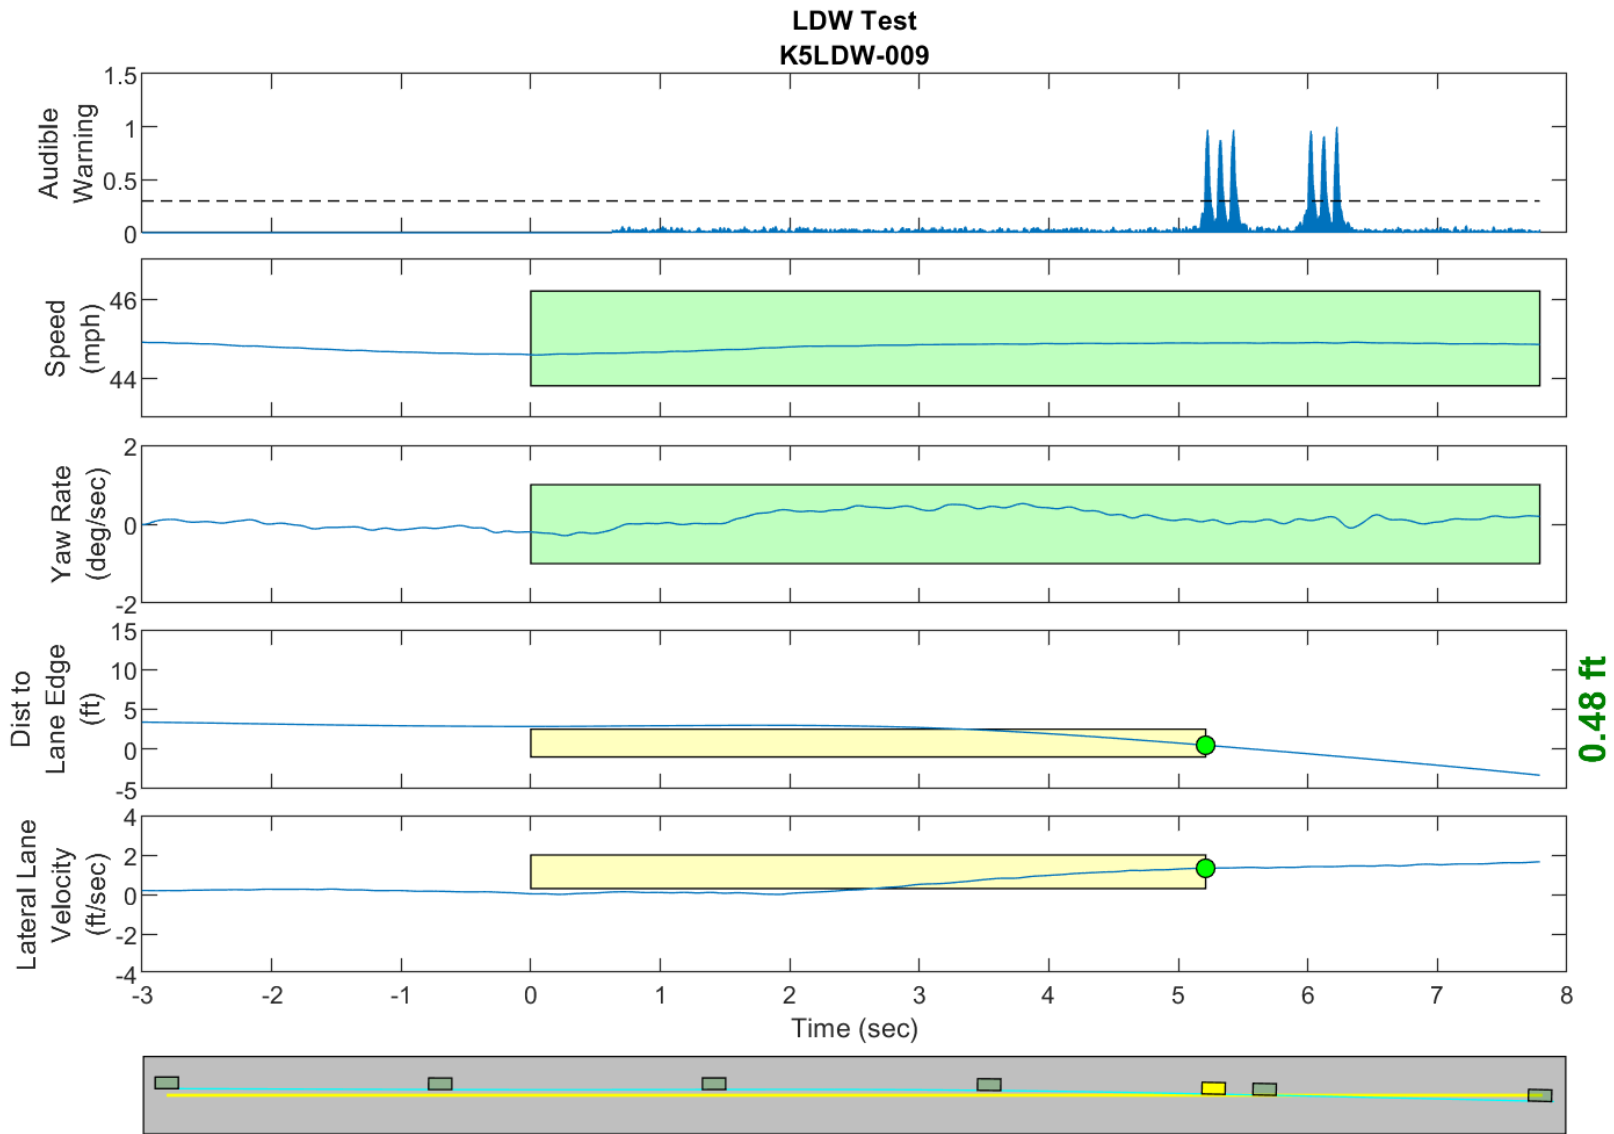


GPS Fix Type: RTK Fixed

Figure D18. Time History for Run 09, Solid Line, Right Departure, Audible Warning

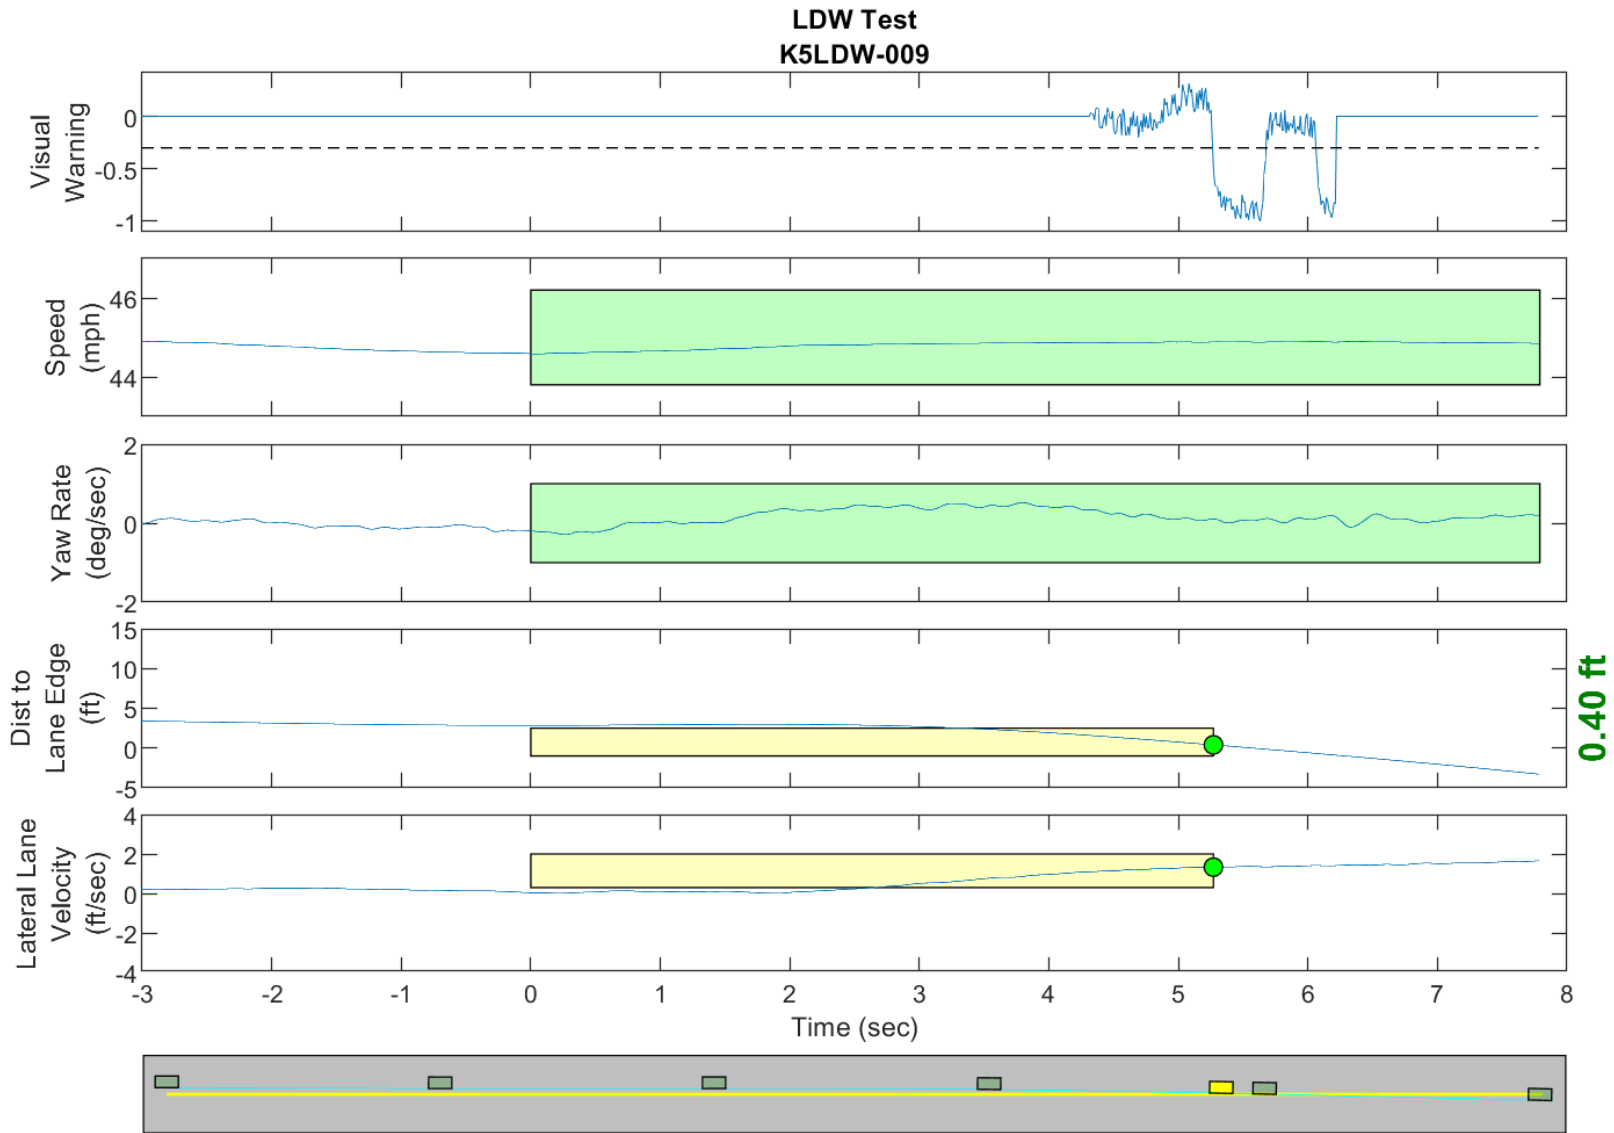


GPS Fix Type: RTK Fixed

Figure D19. Time History for Run 09, Solid Line, Right Departure, Visual Warning

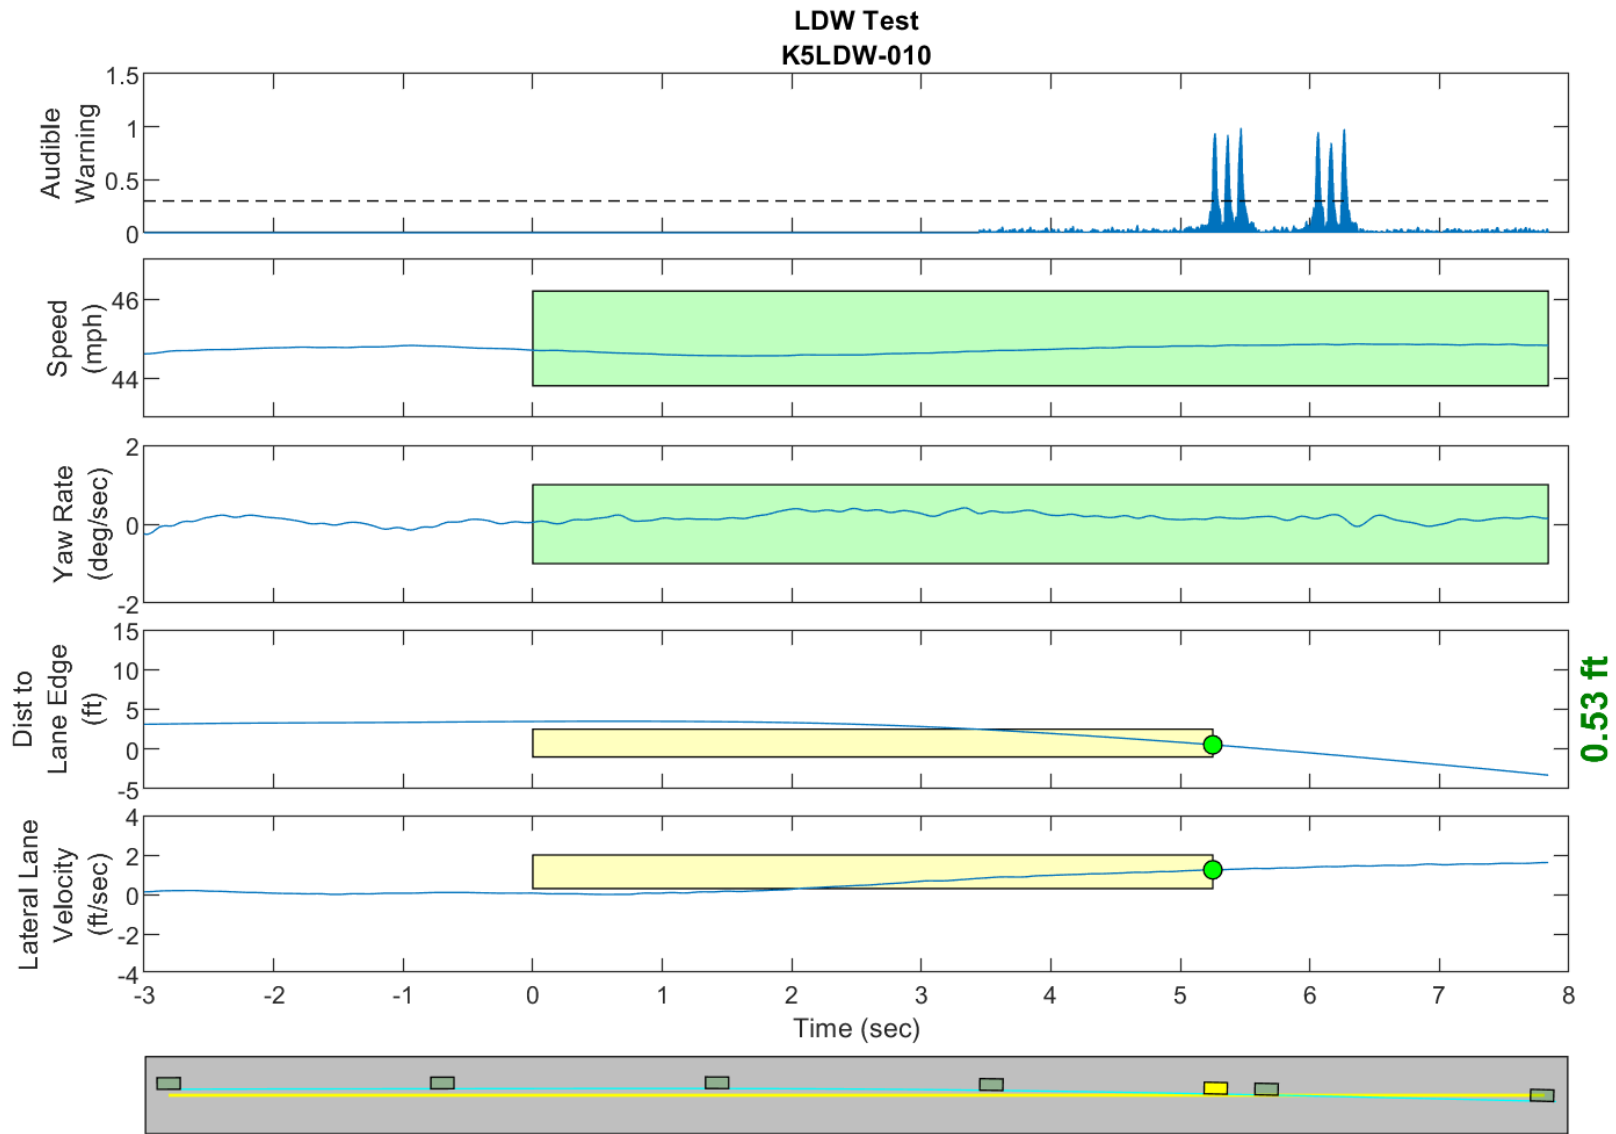


GPS Fix Type: RTK Fixed

Figure D20. Time History for Run 10, Solid Line, Right Departure, Audible Warning

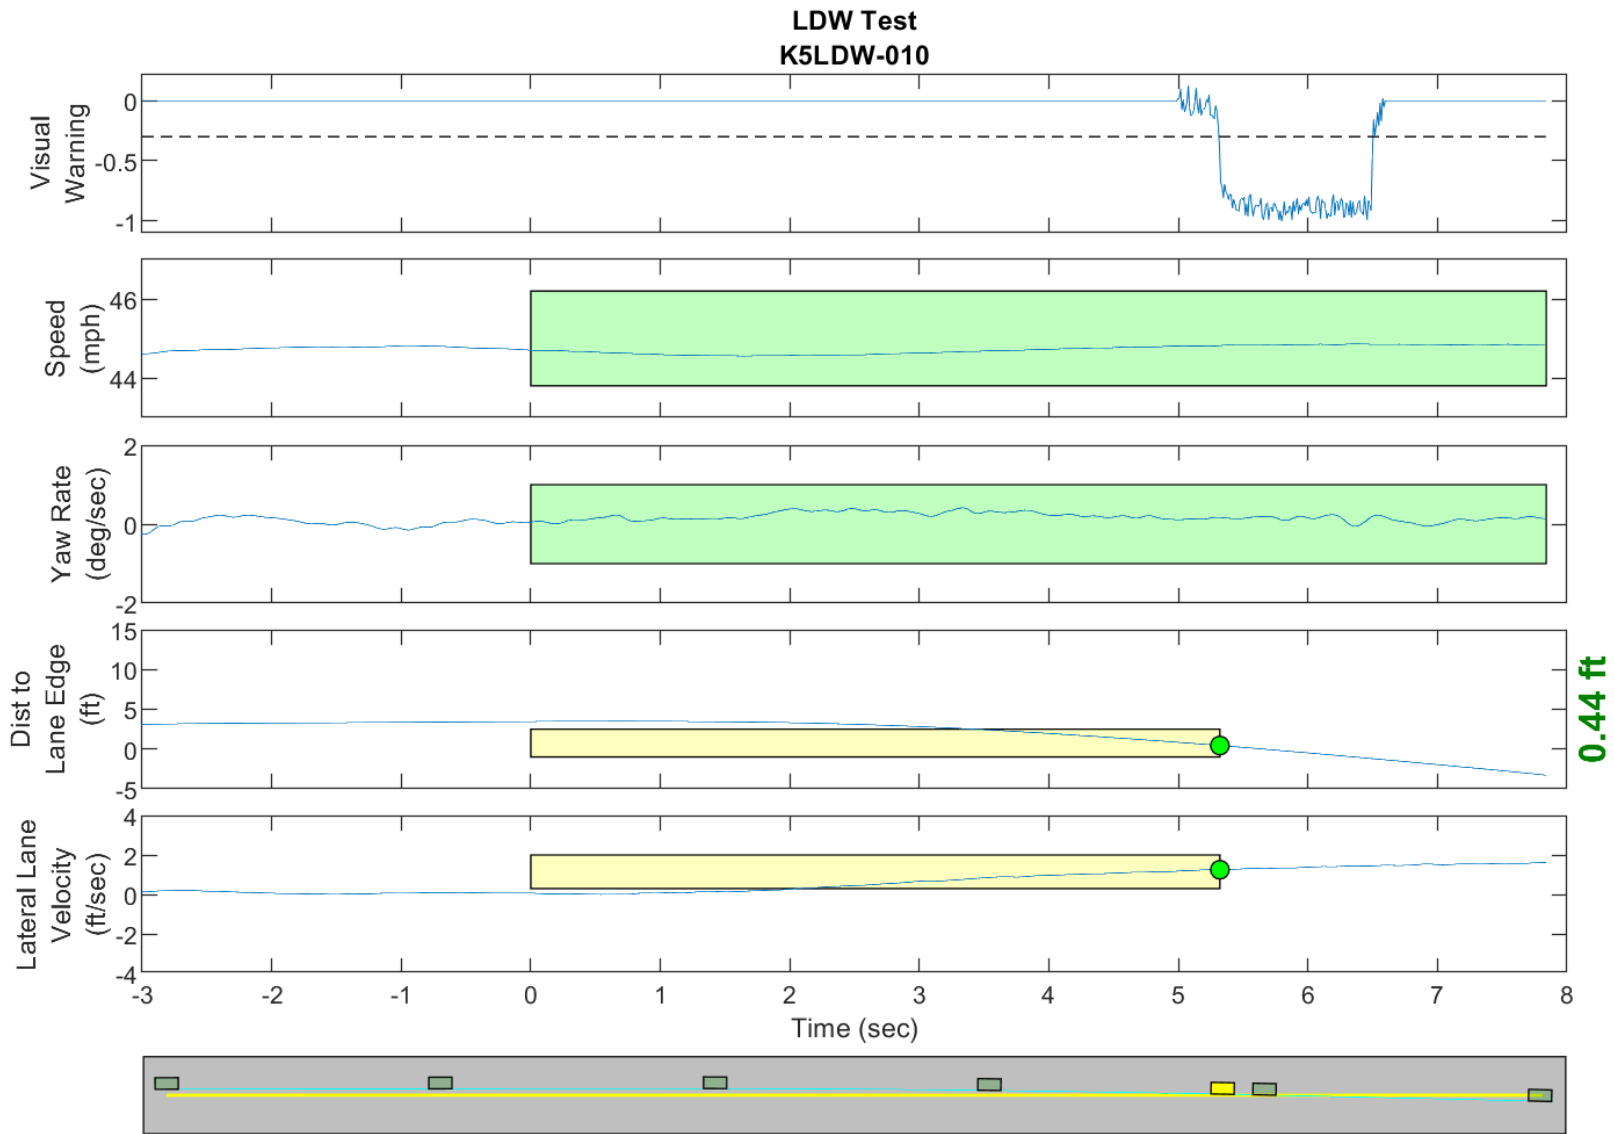


GPS Fix Type: RTK Fixed

Figure D21. Time History for Run 10, Solid Line, Right Departure, Visual Warning

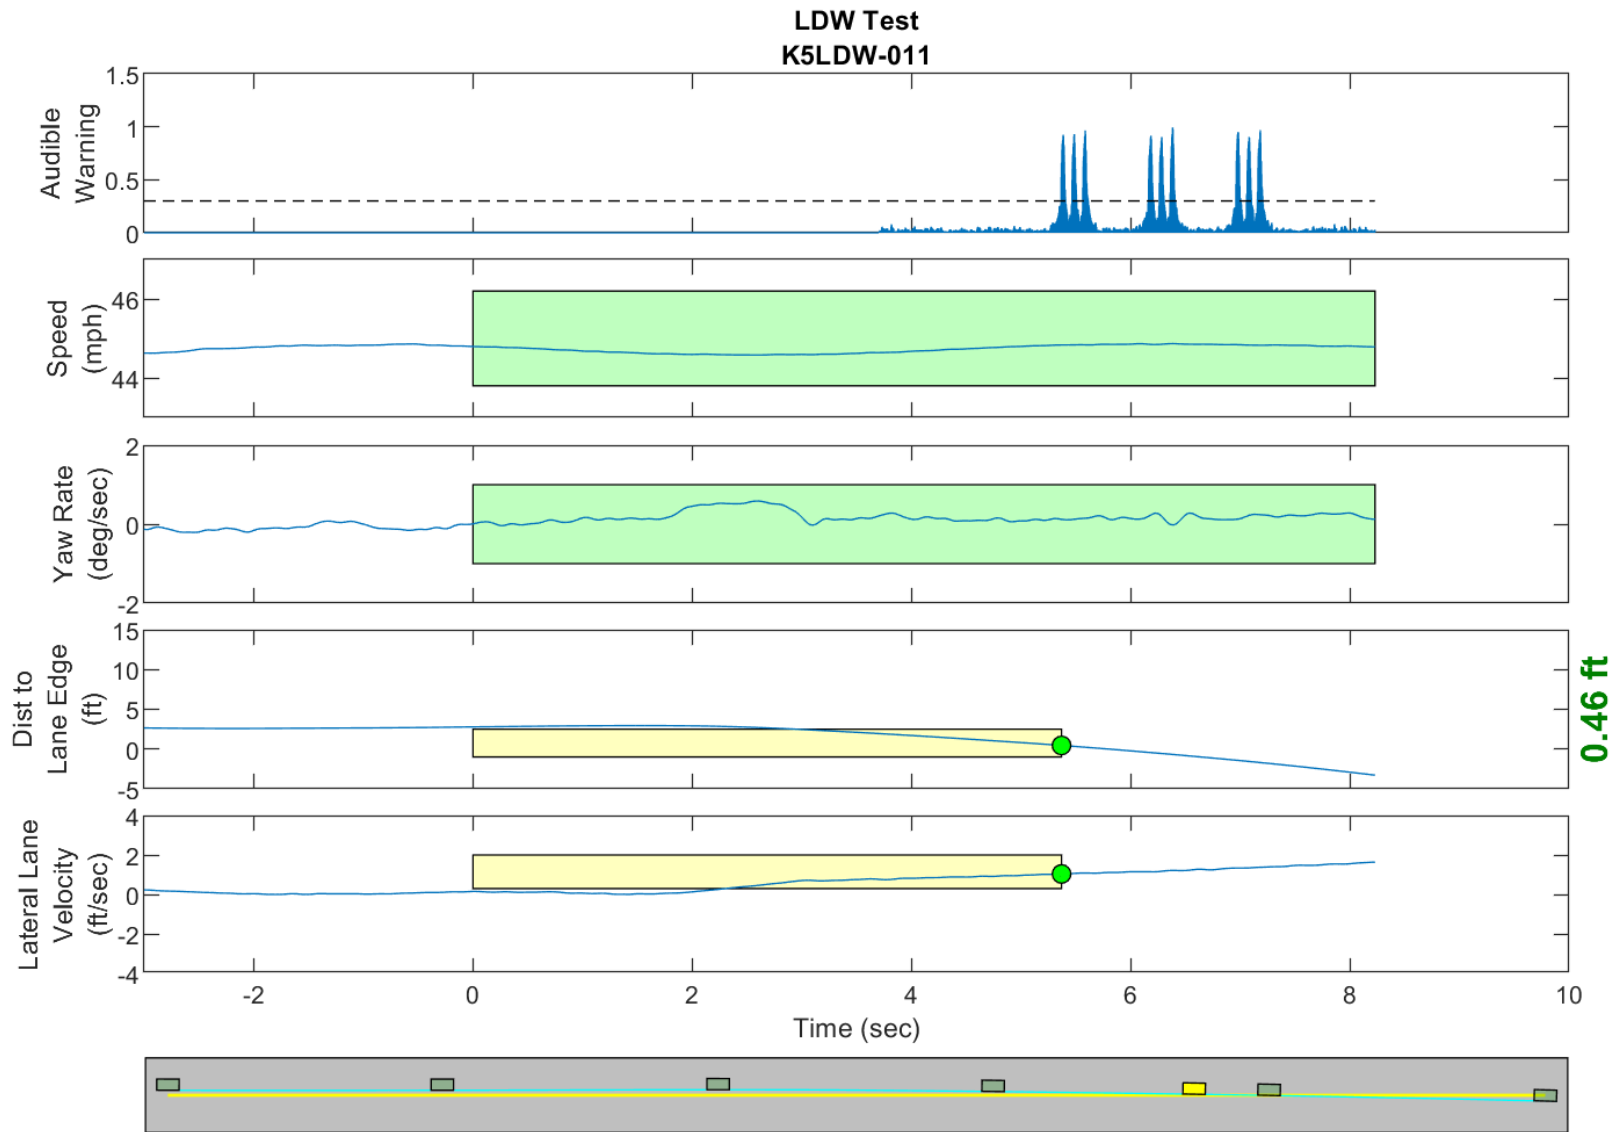


GPS Fix Type: RTK Fixed

Figure D22. Time History for Run 11, Solid Line, Right Departure, Audible Warning

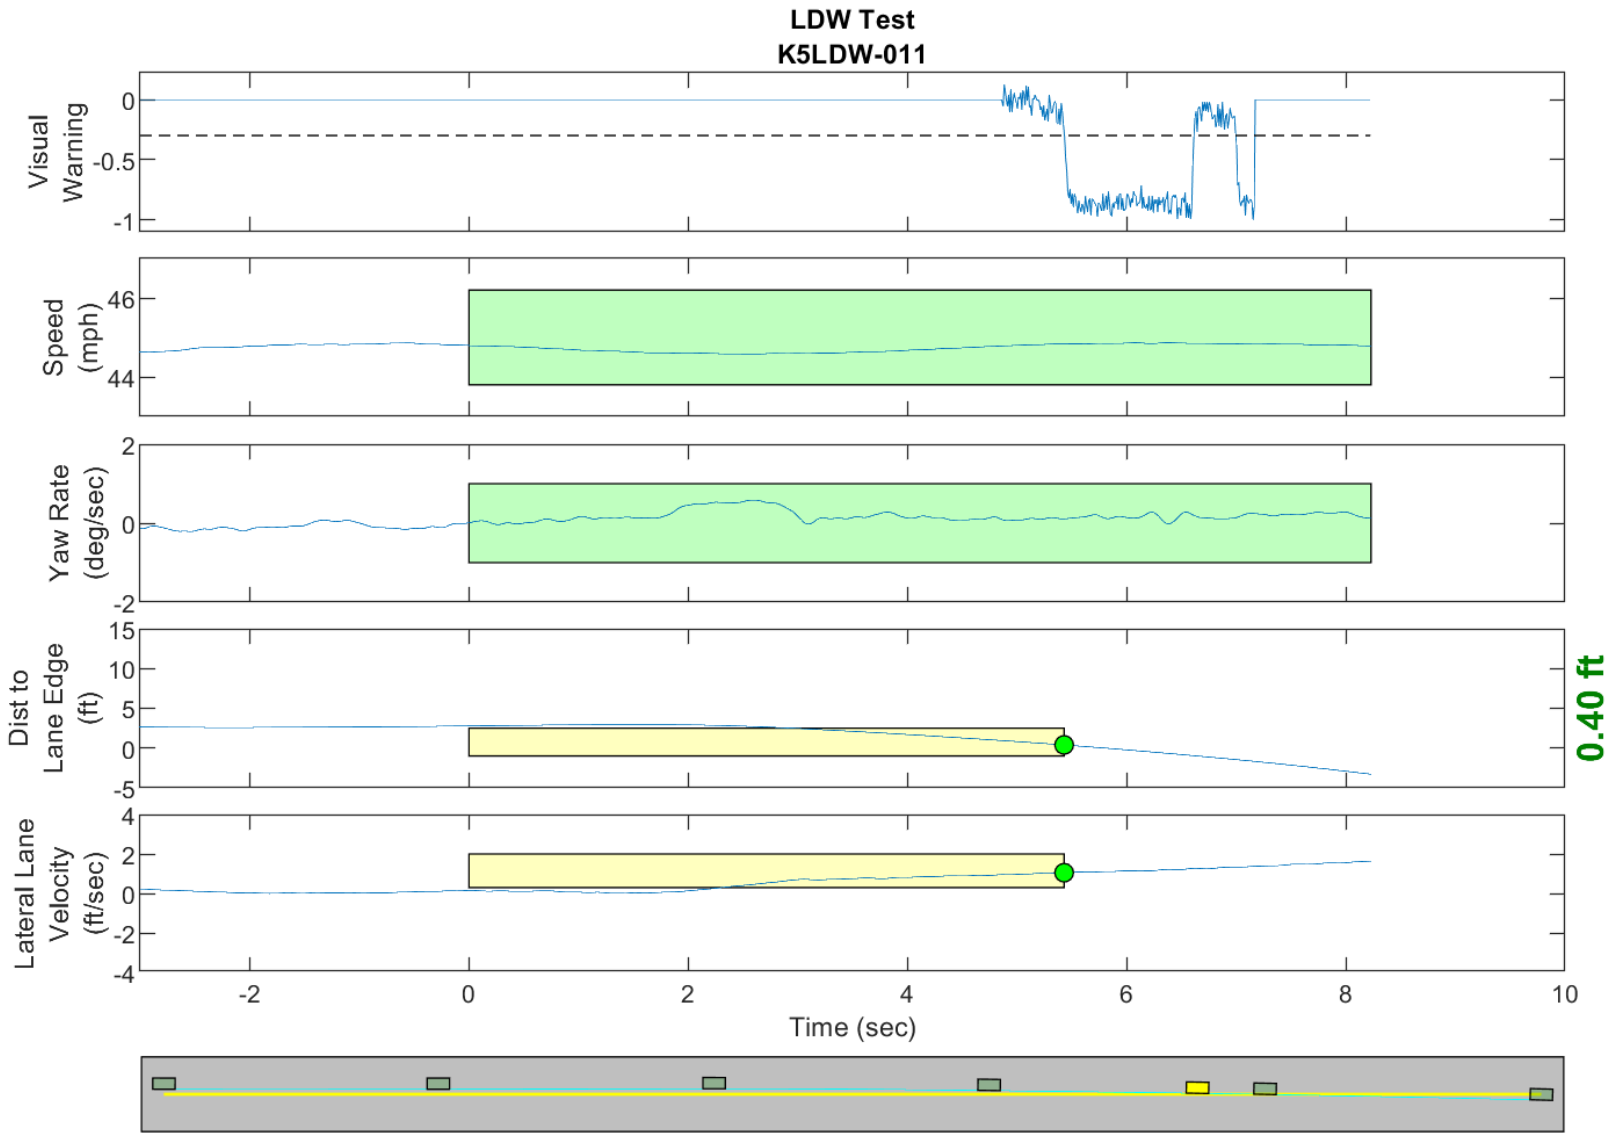


GPS Fix Type: RTK Fixed

Figure D23. Time History for Run 11, Solid Line, Right Departure, Visual Warning

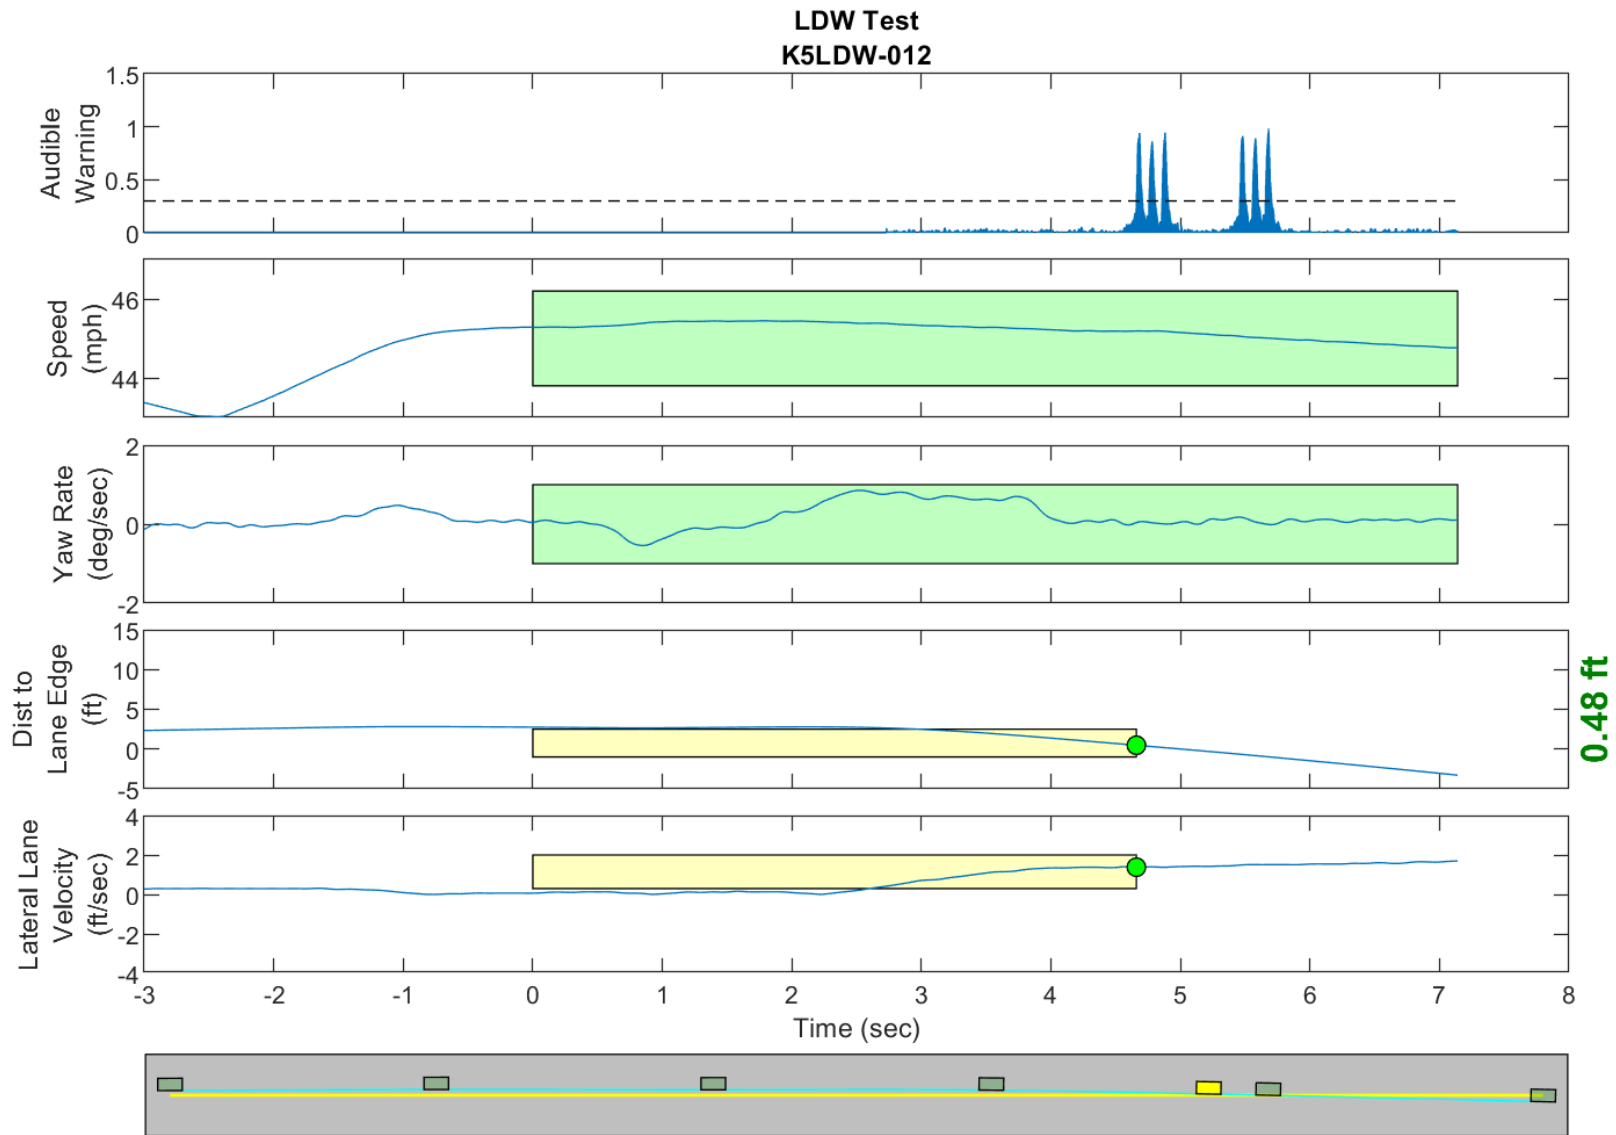


GPS Fix Type: RTK Fixed

Figure D24. Time History for Run 12, Solid Line, Right Departure, Audible Warning

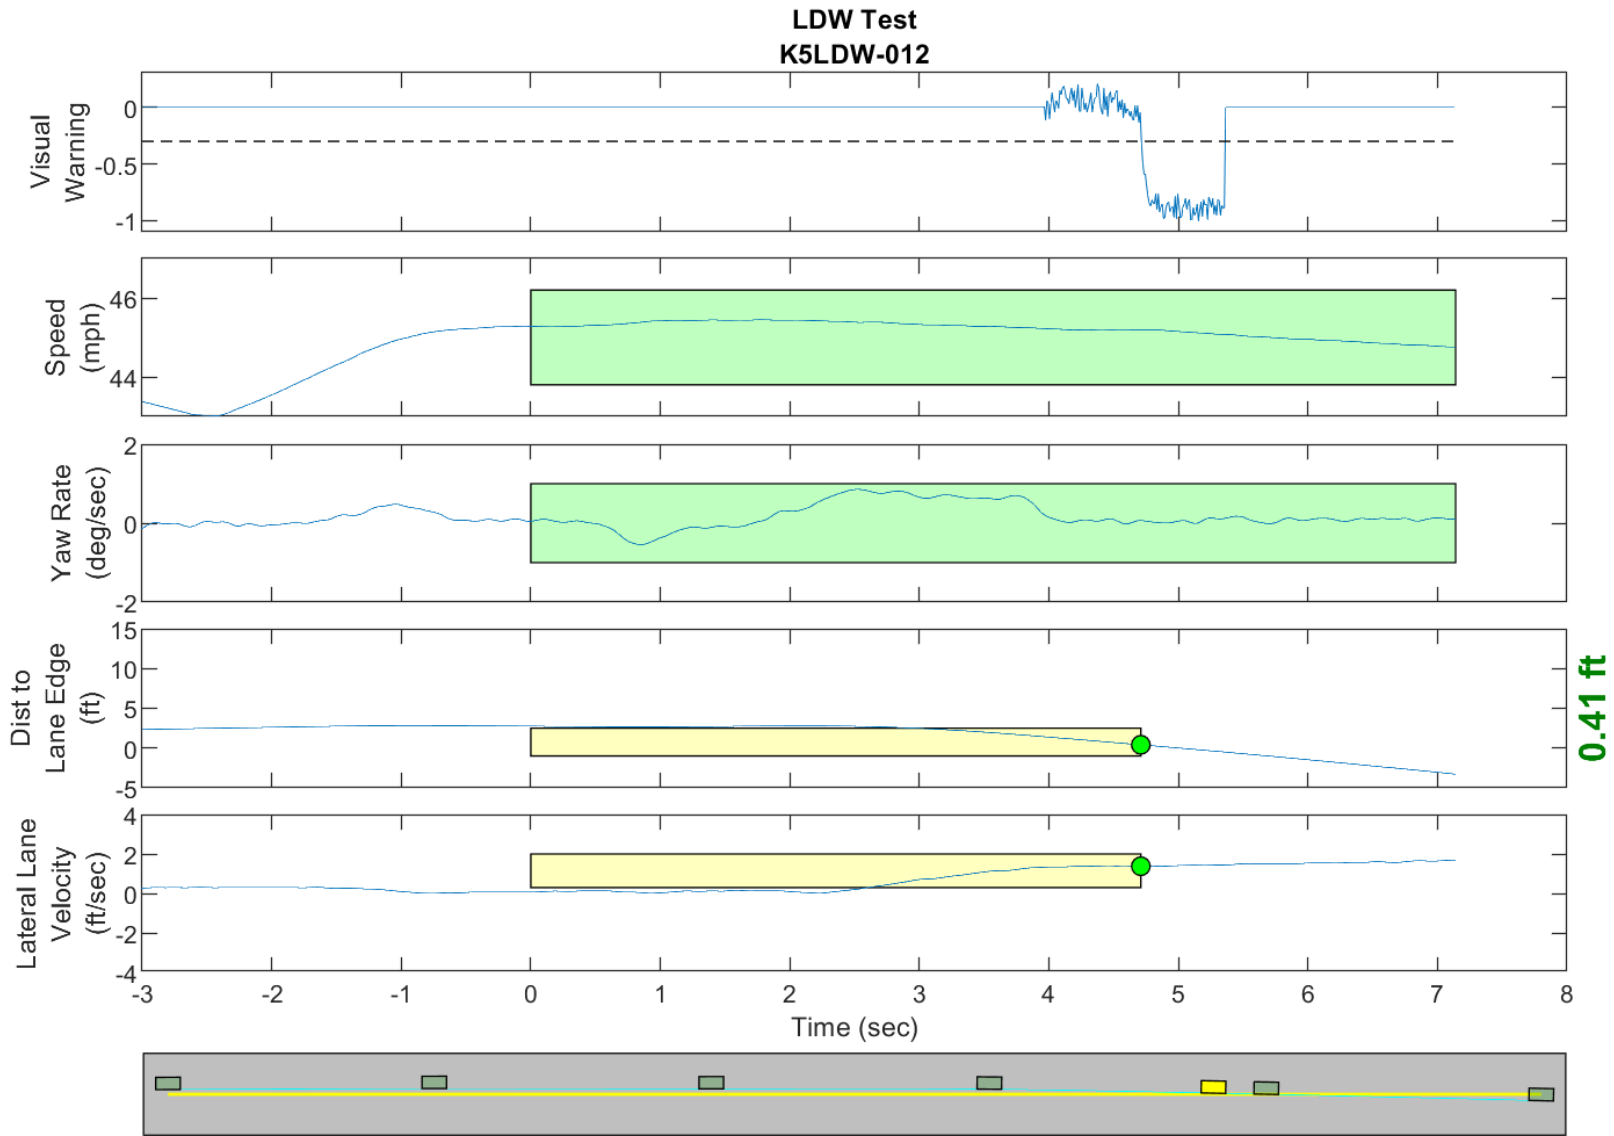

GPS Fix Type: RTK Fixed


Figure D25. Time History for Run 12, Solid Line, Right Departure, Visual Warning

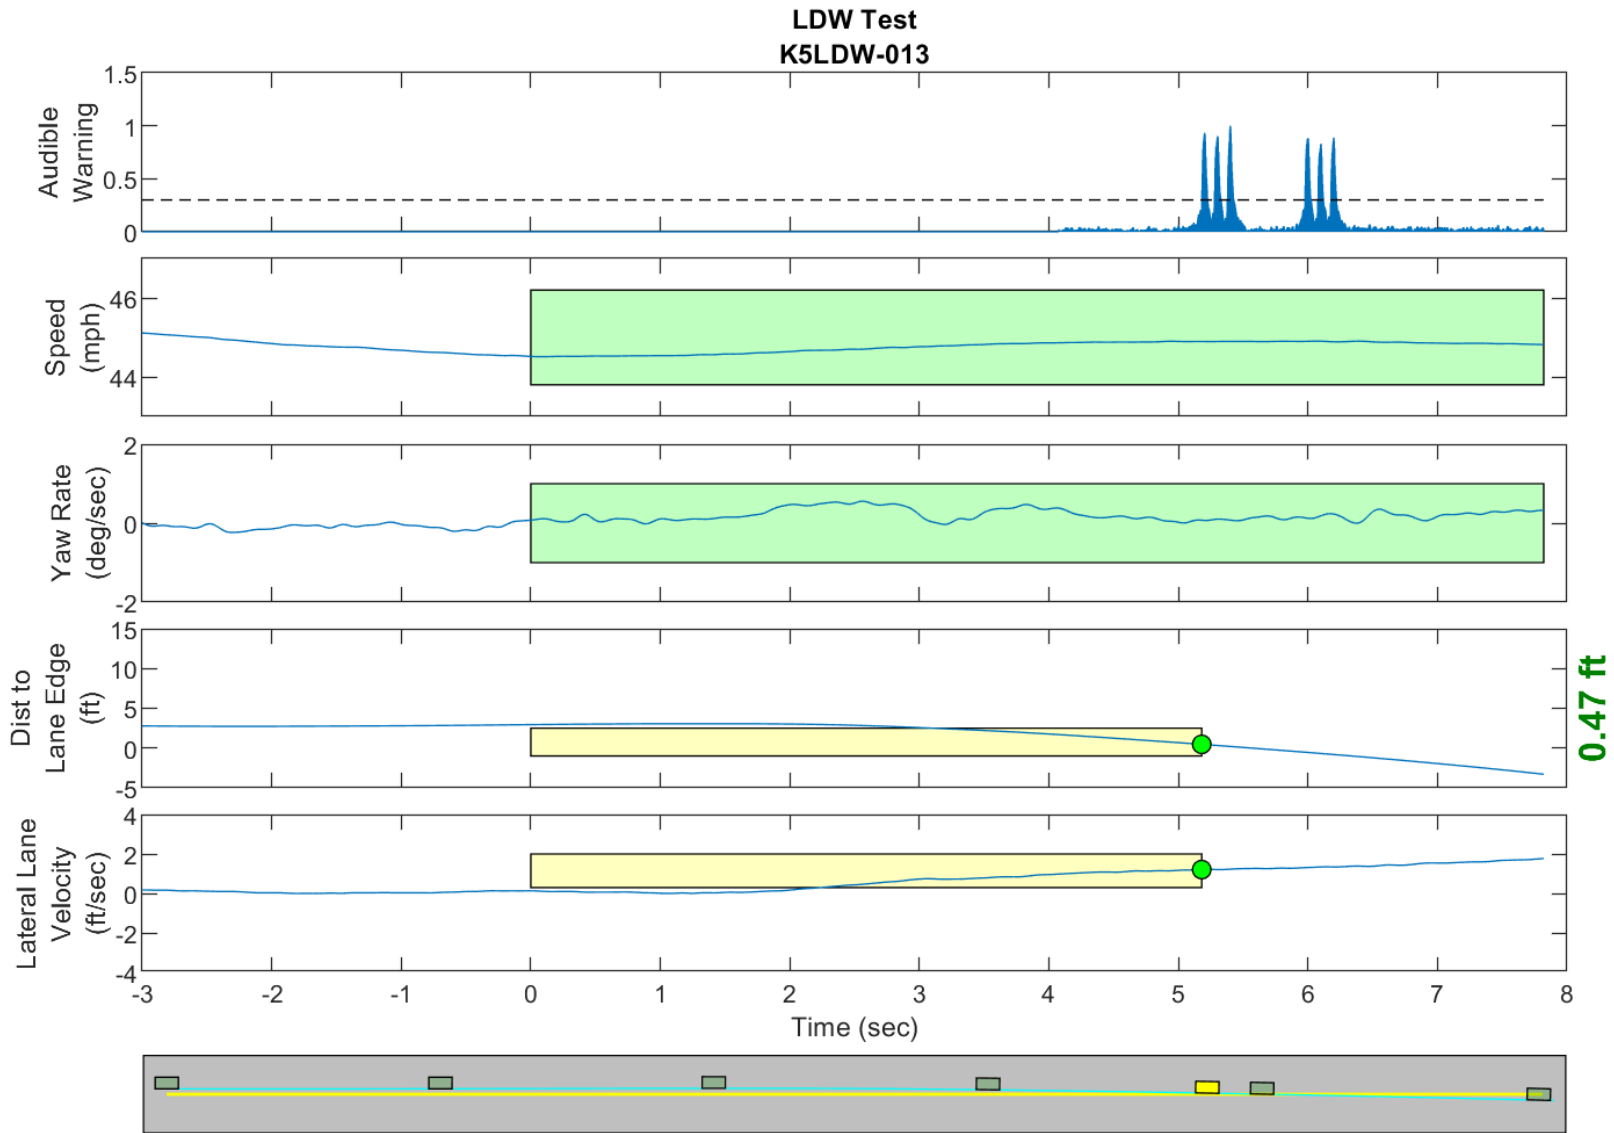

0.47 ft


GPS Fix Type: RTK Fixed

Figure D26. Time History for Run 13, Solid Line, Right Departure, Audible Warning

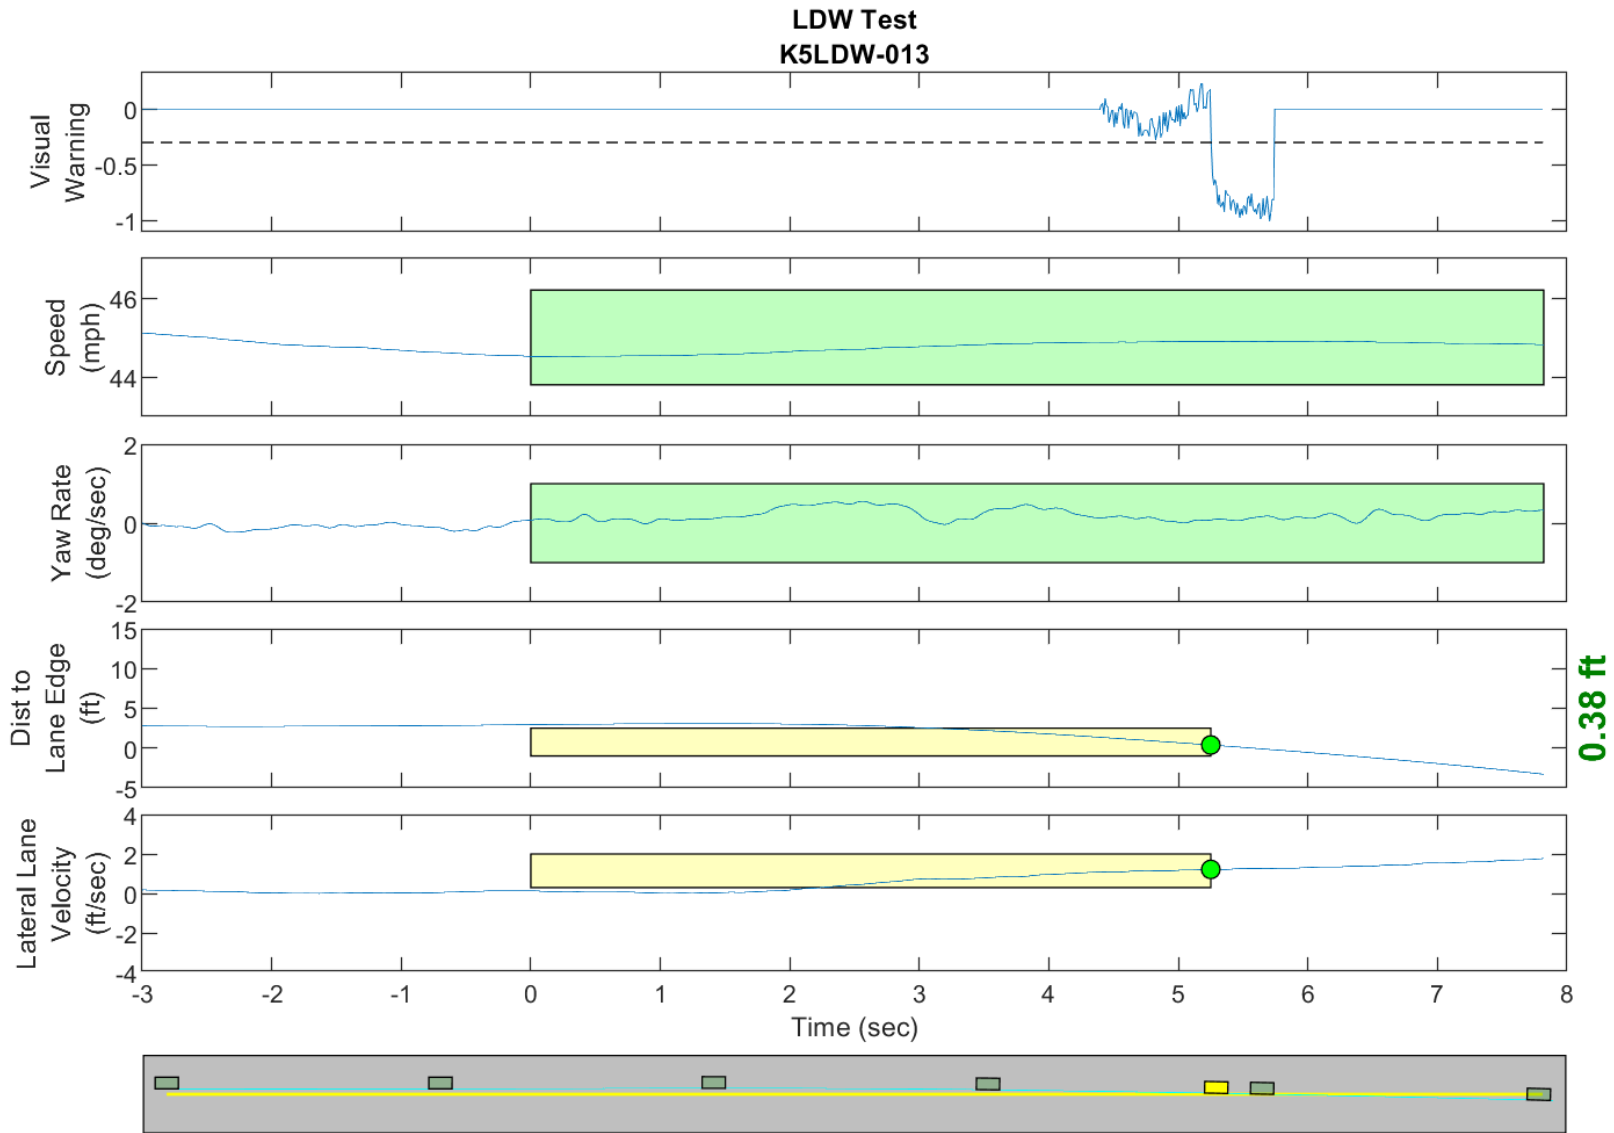


GPS Fix Type: RTK Fixed

Figure D27. Time History for Run 13, Solid Line, Right Departure, Visual Warning

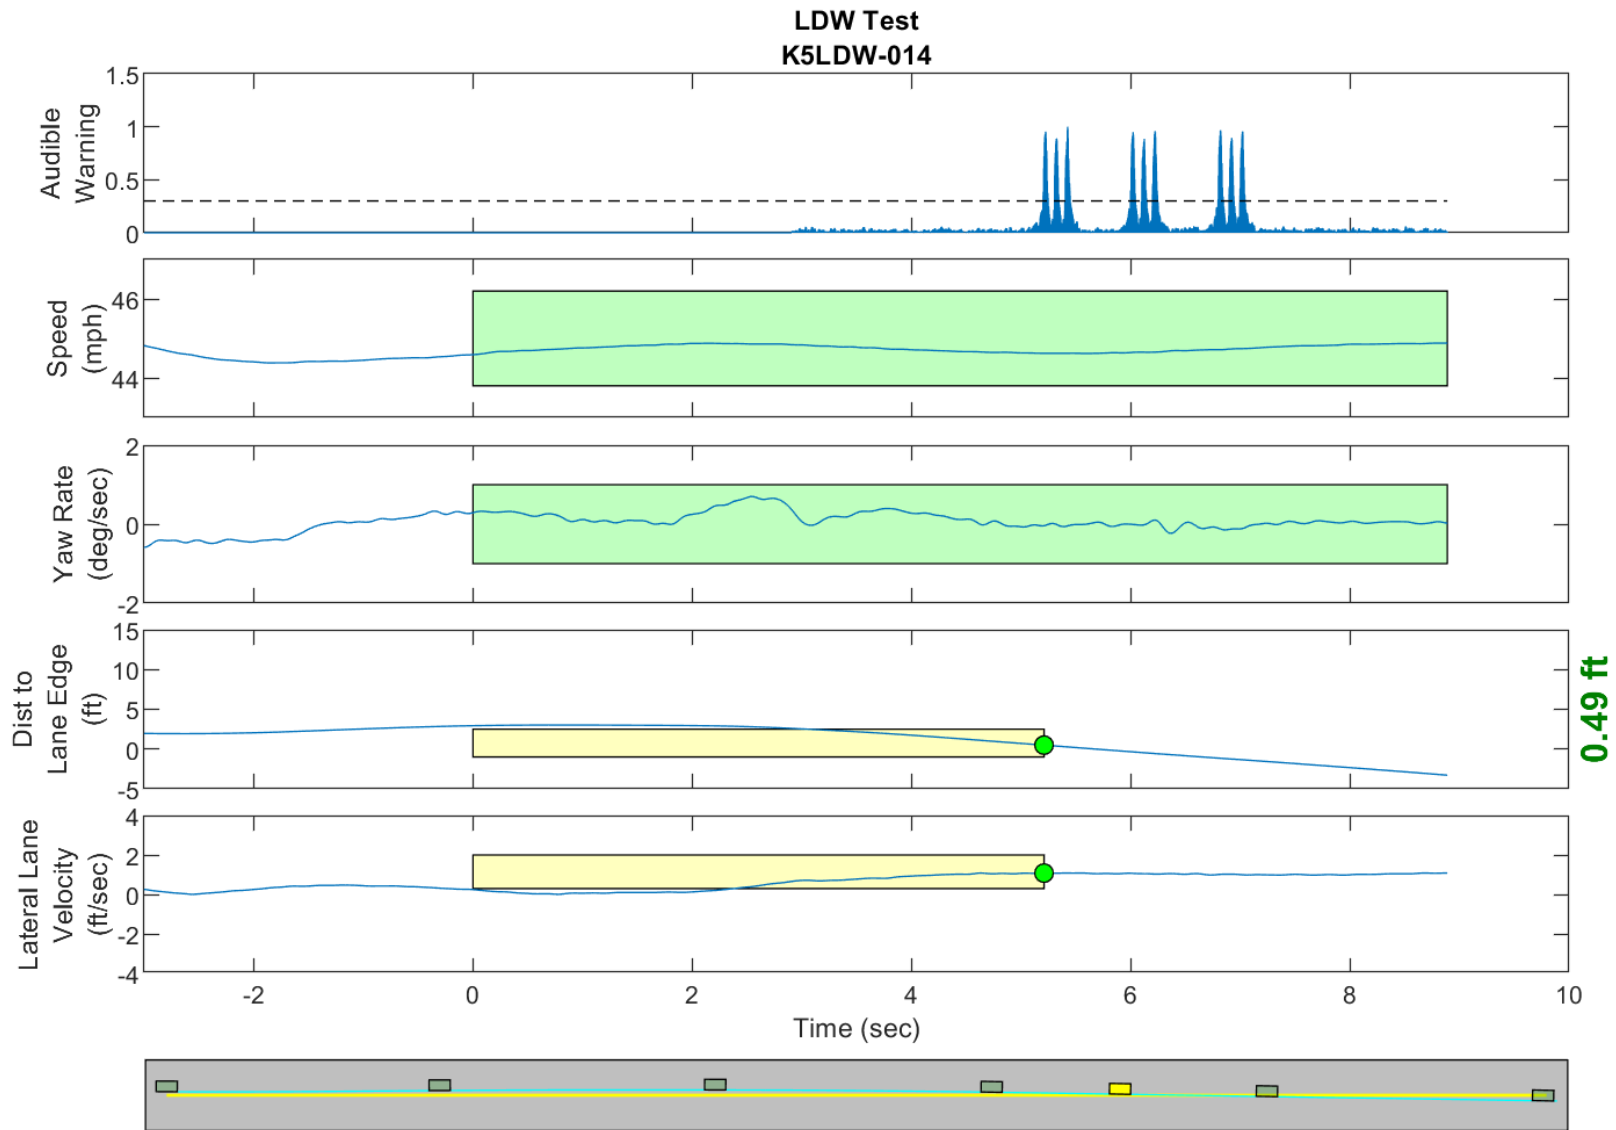


GPS Fix Type: RTK Fixed

Figure D28. Time History for Run 14, Solid Line, Right Departure, Audible Warning

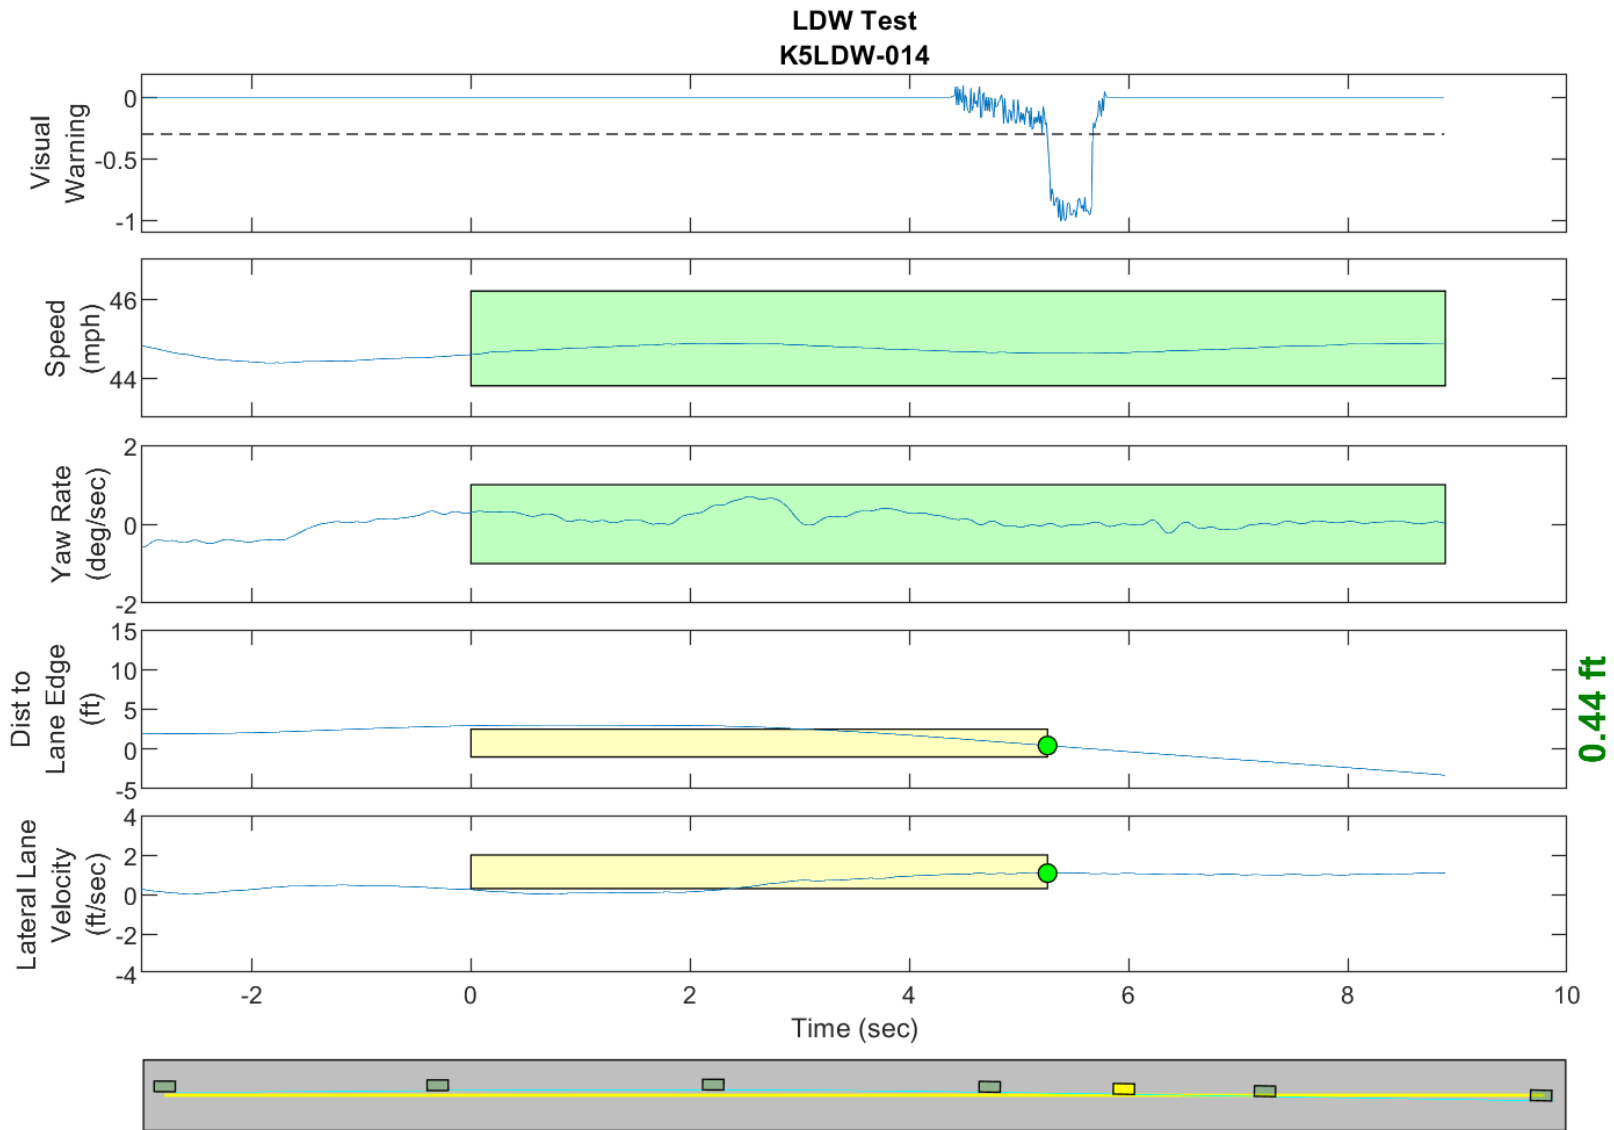


GPS Fix Type: RTK Fixed

Figure D29. Time History for Run 14, Solid Line, Right Departure, Visual Warning

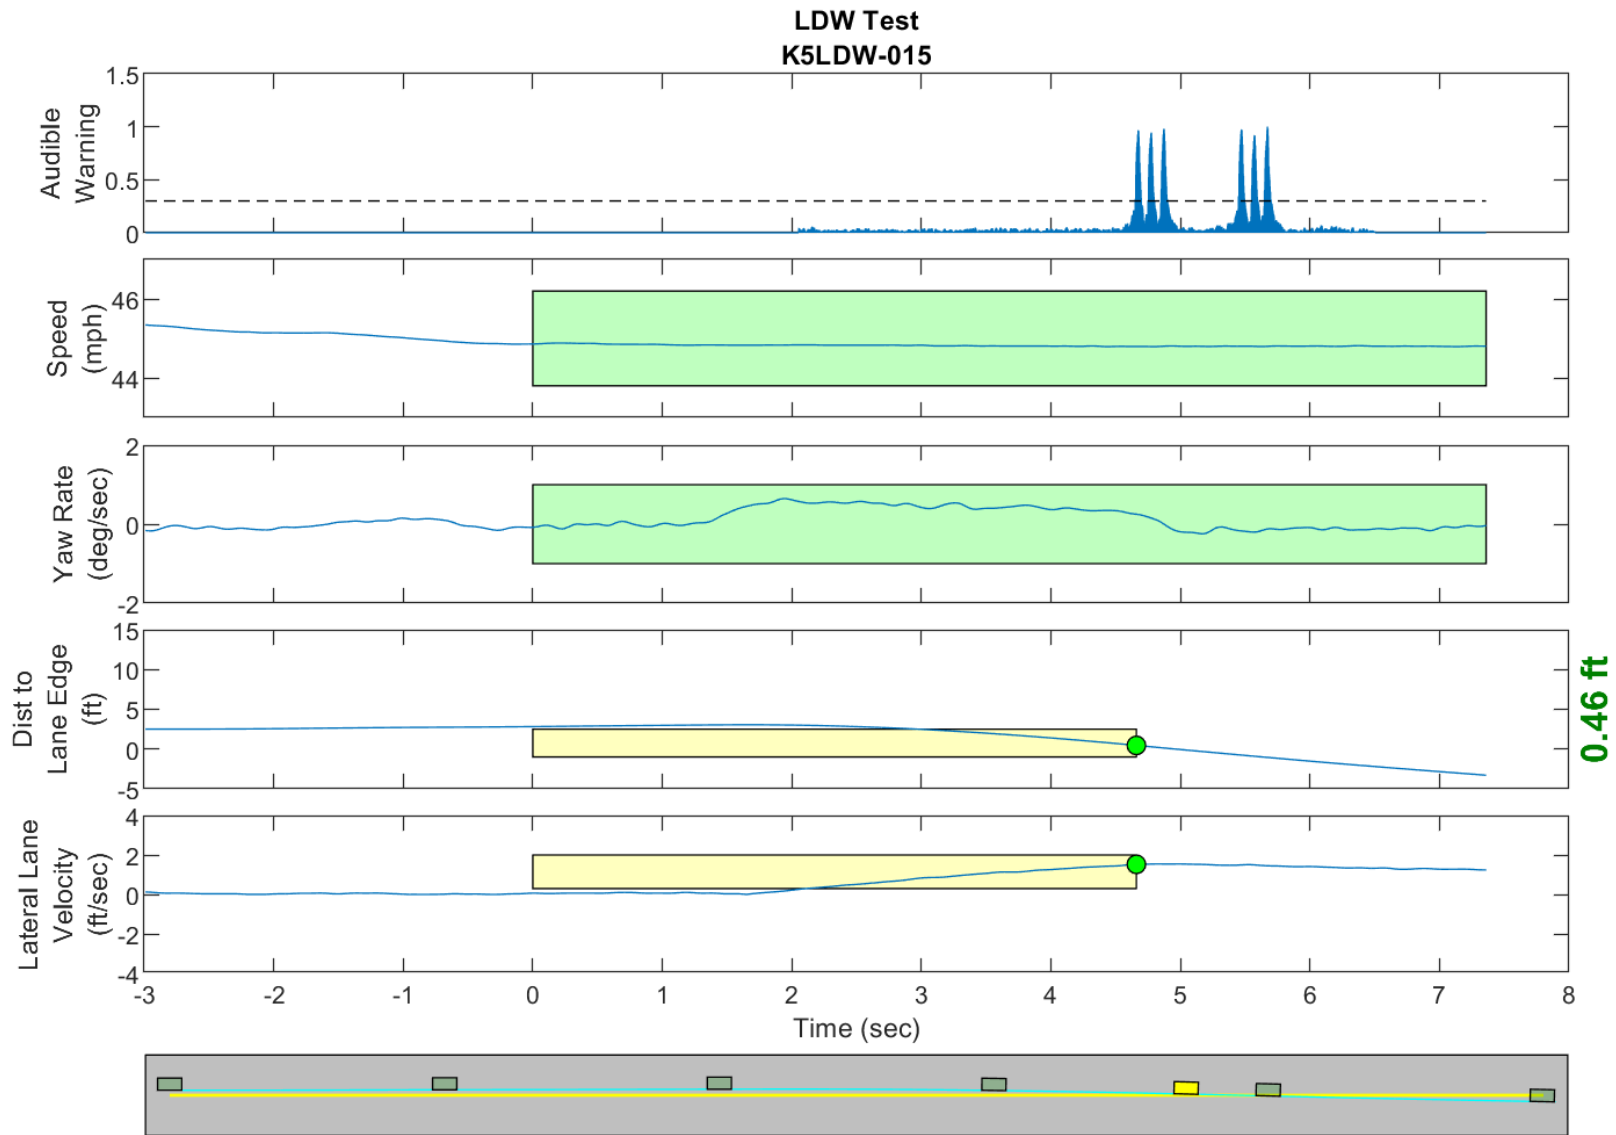


GPS Fix Type: RTK Fixed

Figure D30. Time History for Run 15, Solid Line, Right Departure, Audible Warning

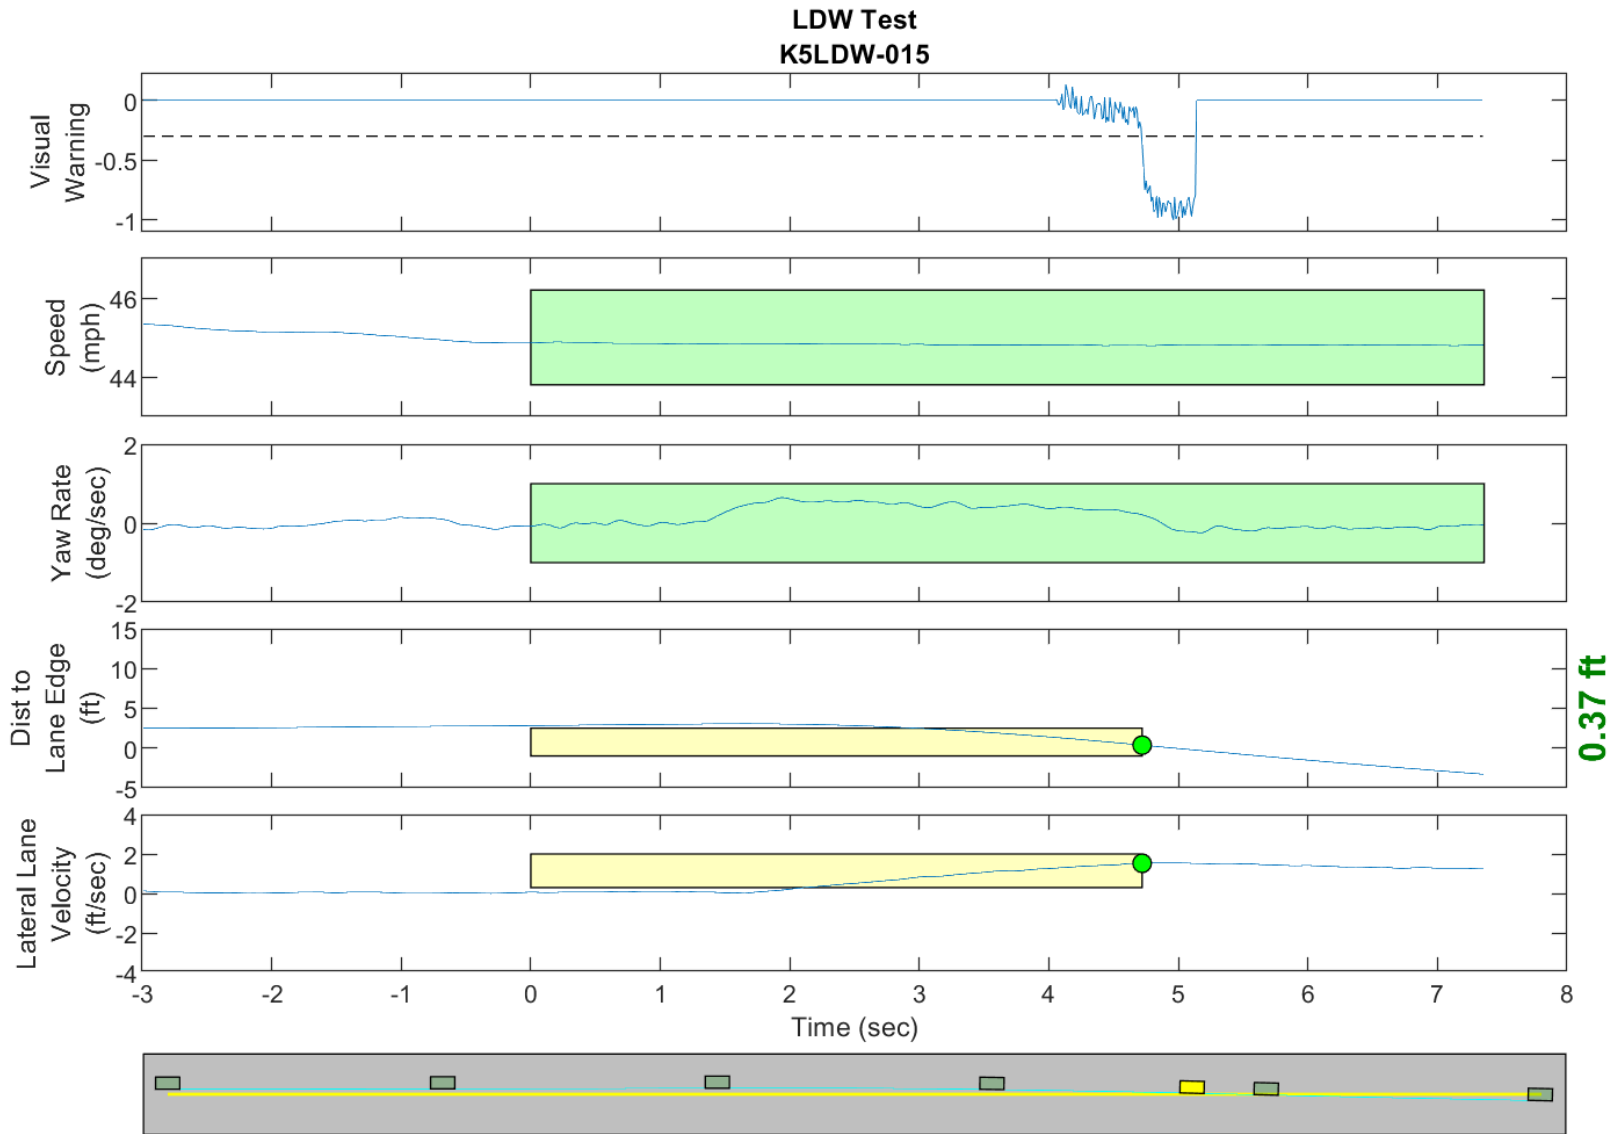


GPS Fix Type: RTK Fixed

Figure D31. Time History for Run 15, Solid Line, Right Departure, Visual Warning

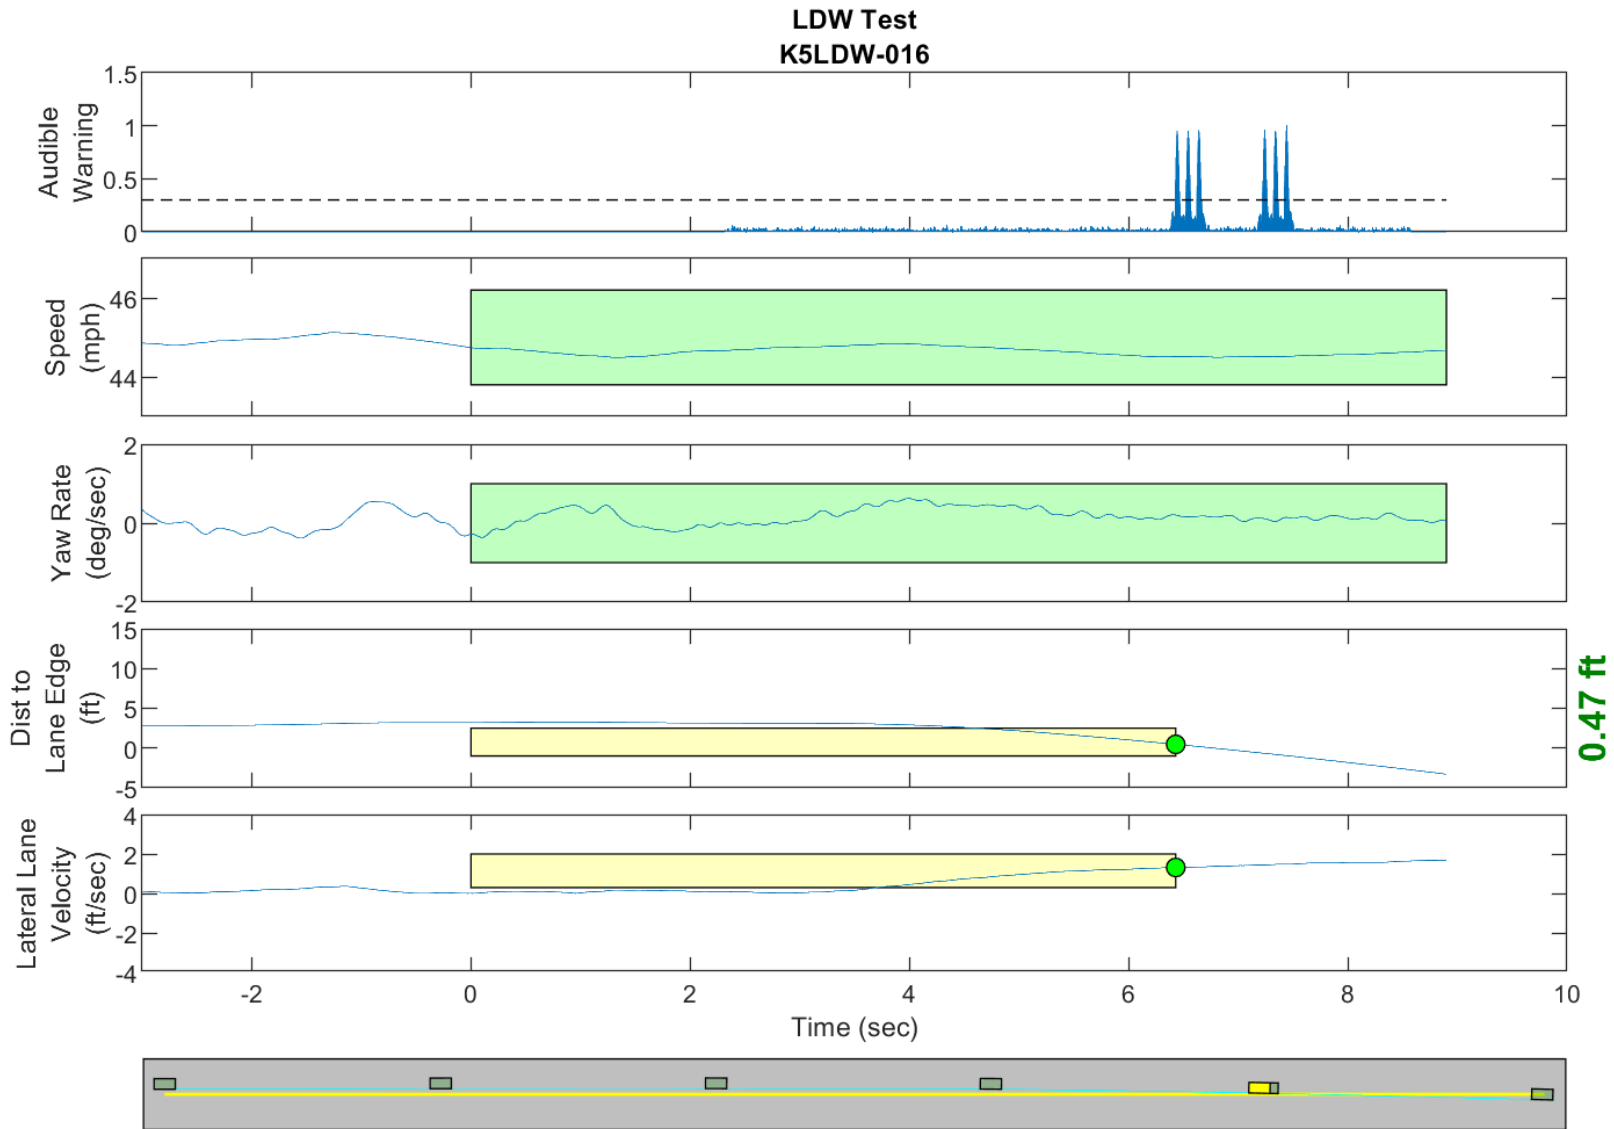


GPS Fix Type: RTK Fixed

Figure D32. Time History for Run 16, Dashed Line, Right Departure, Audible Warning

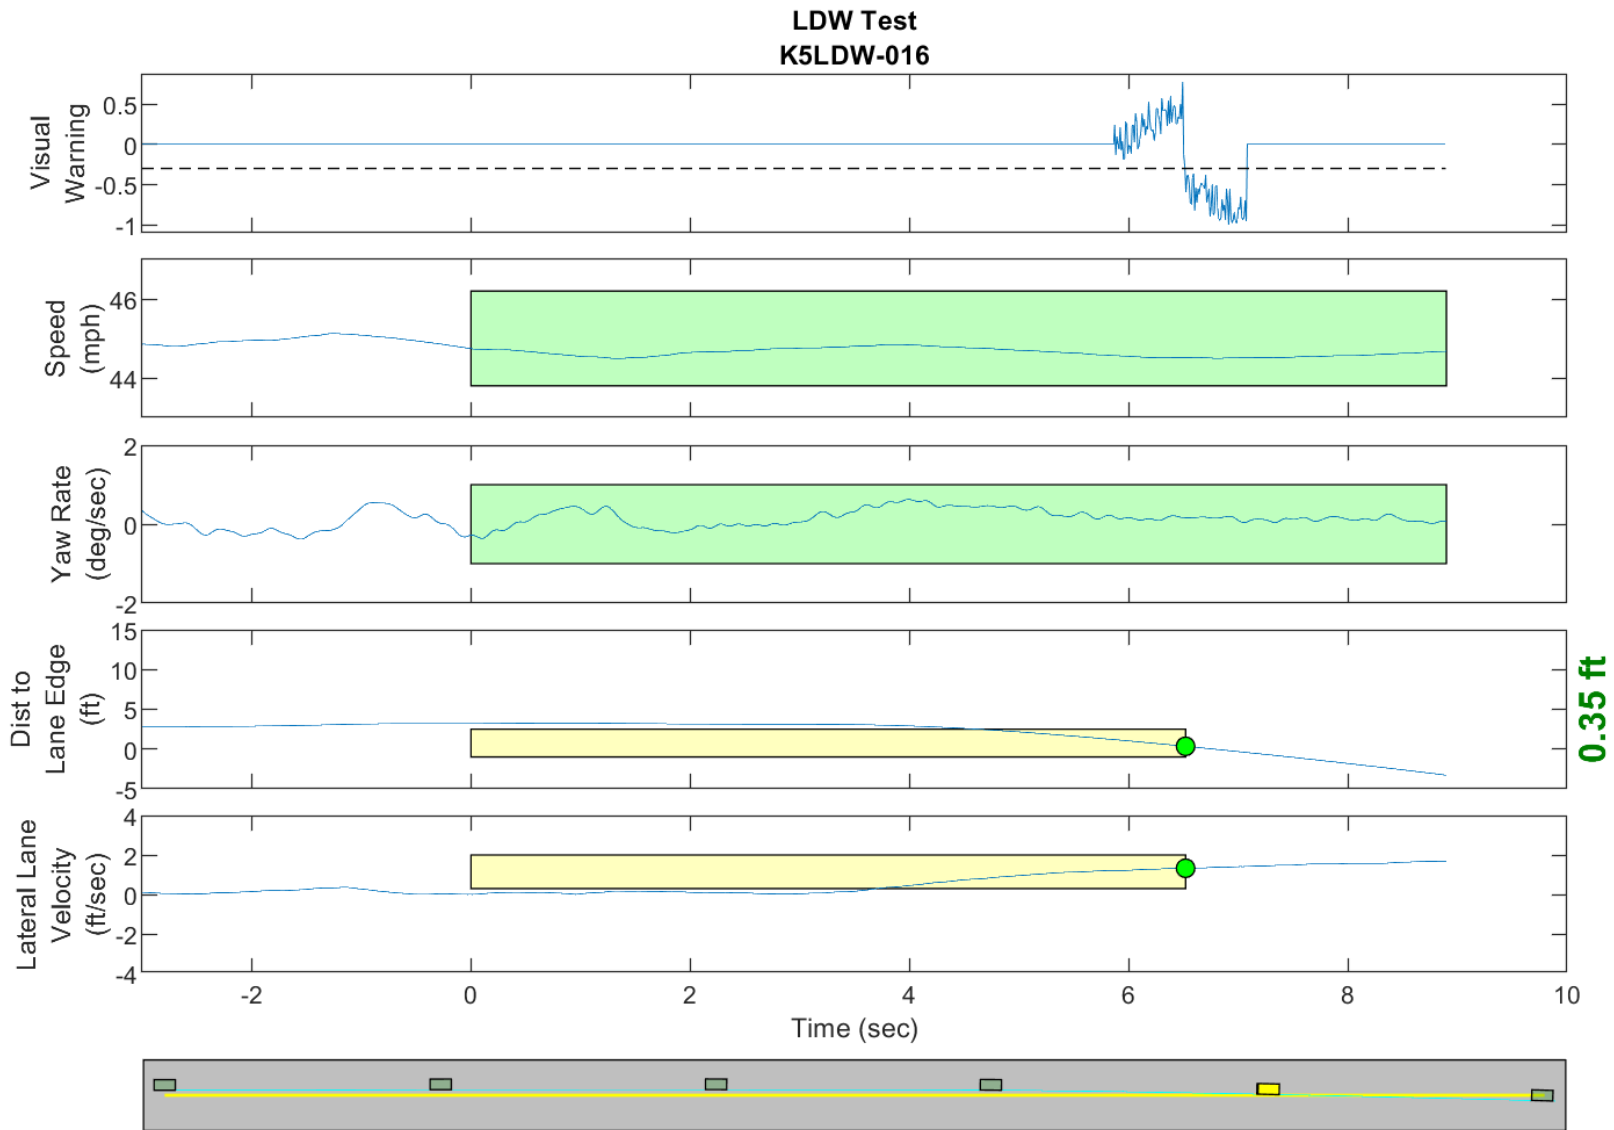


GPS Fix Type: RTK Fixed

Figure D33. Time History for Run 16, Dashed Line, Right Departure, Visual Warning

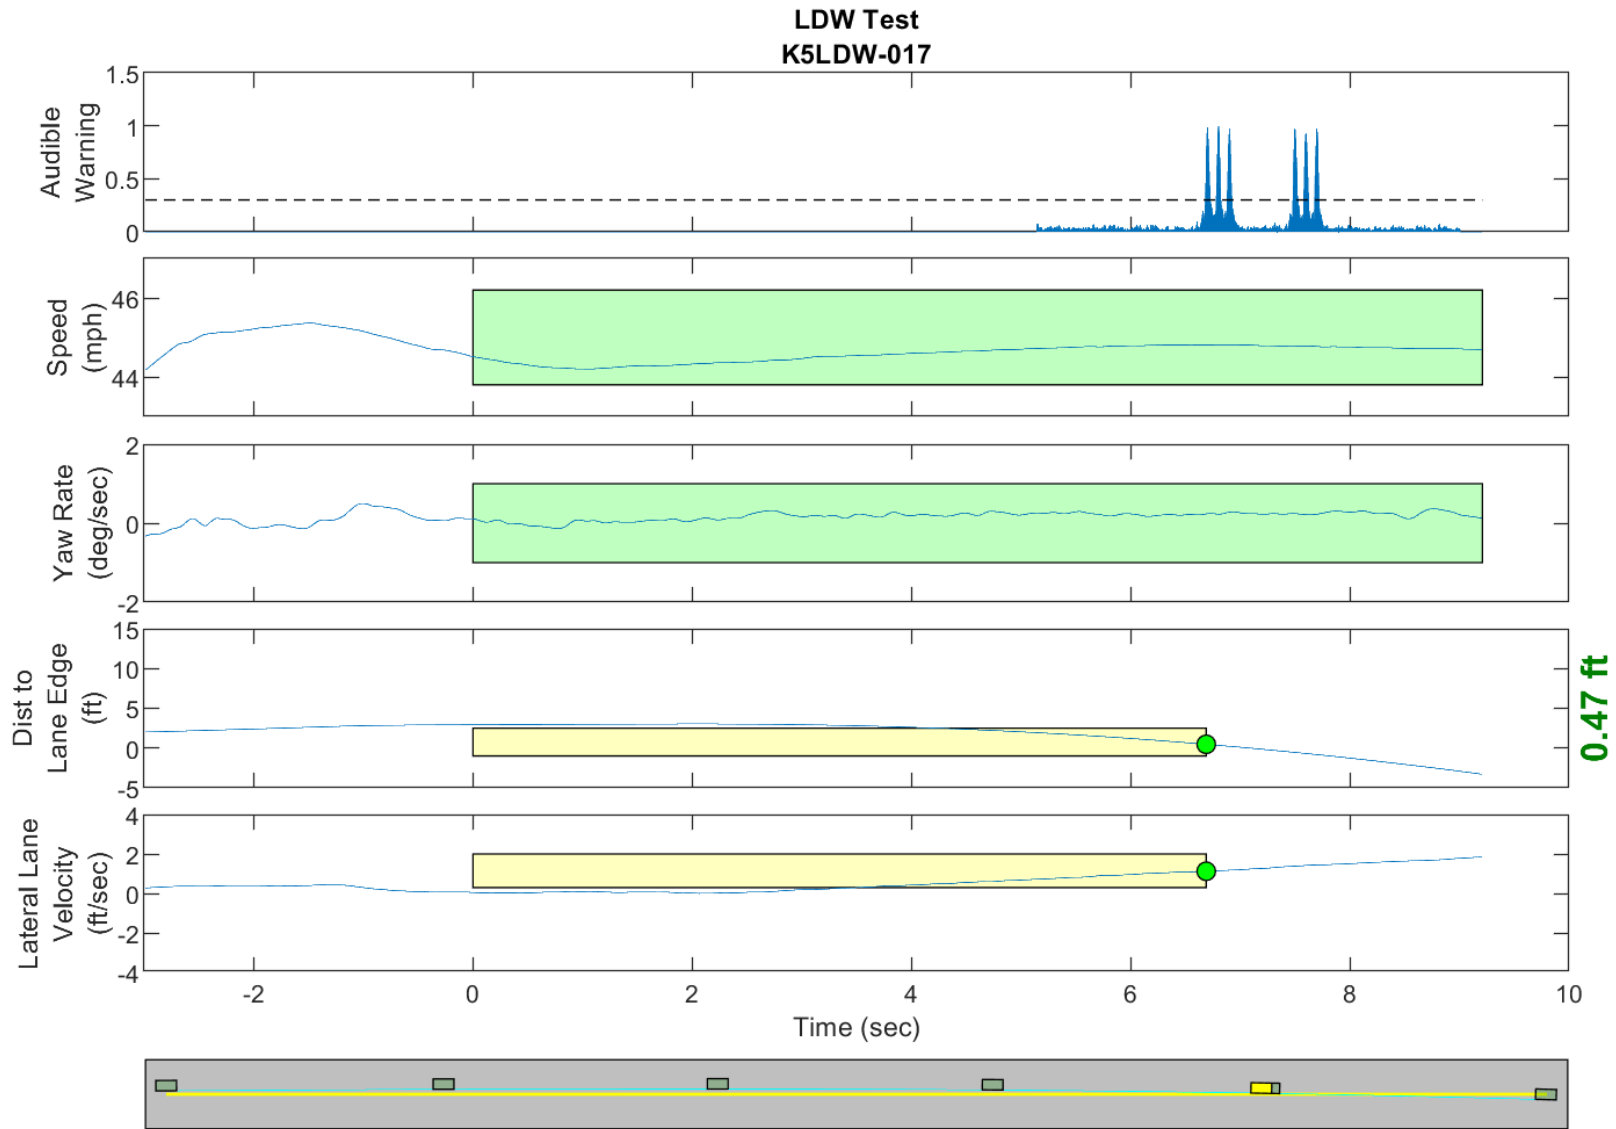


GPS Fix Type: RTK Fixed

Figure D34. Time History for Run 17, Dashed Line, Right Departure, Audible Warning

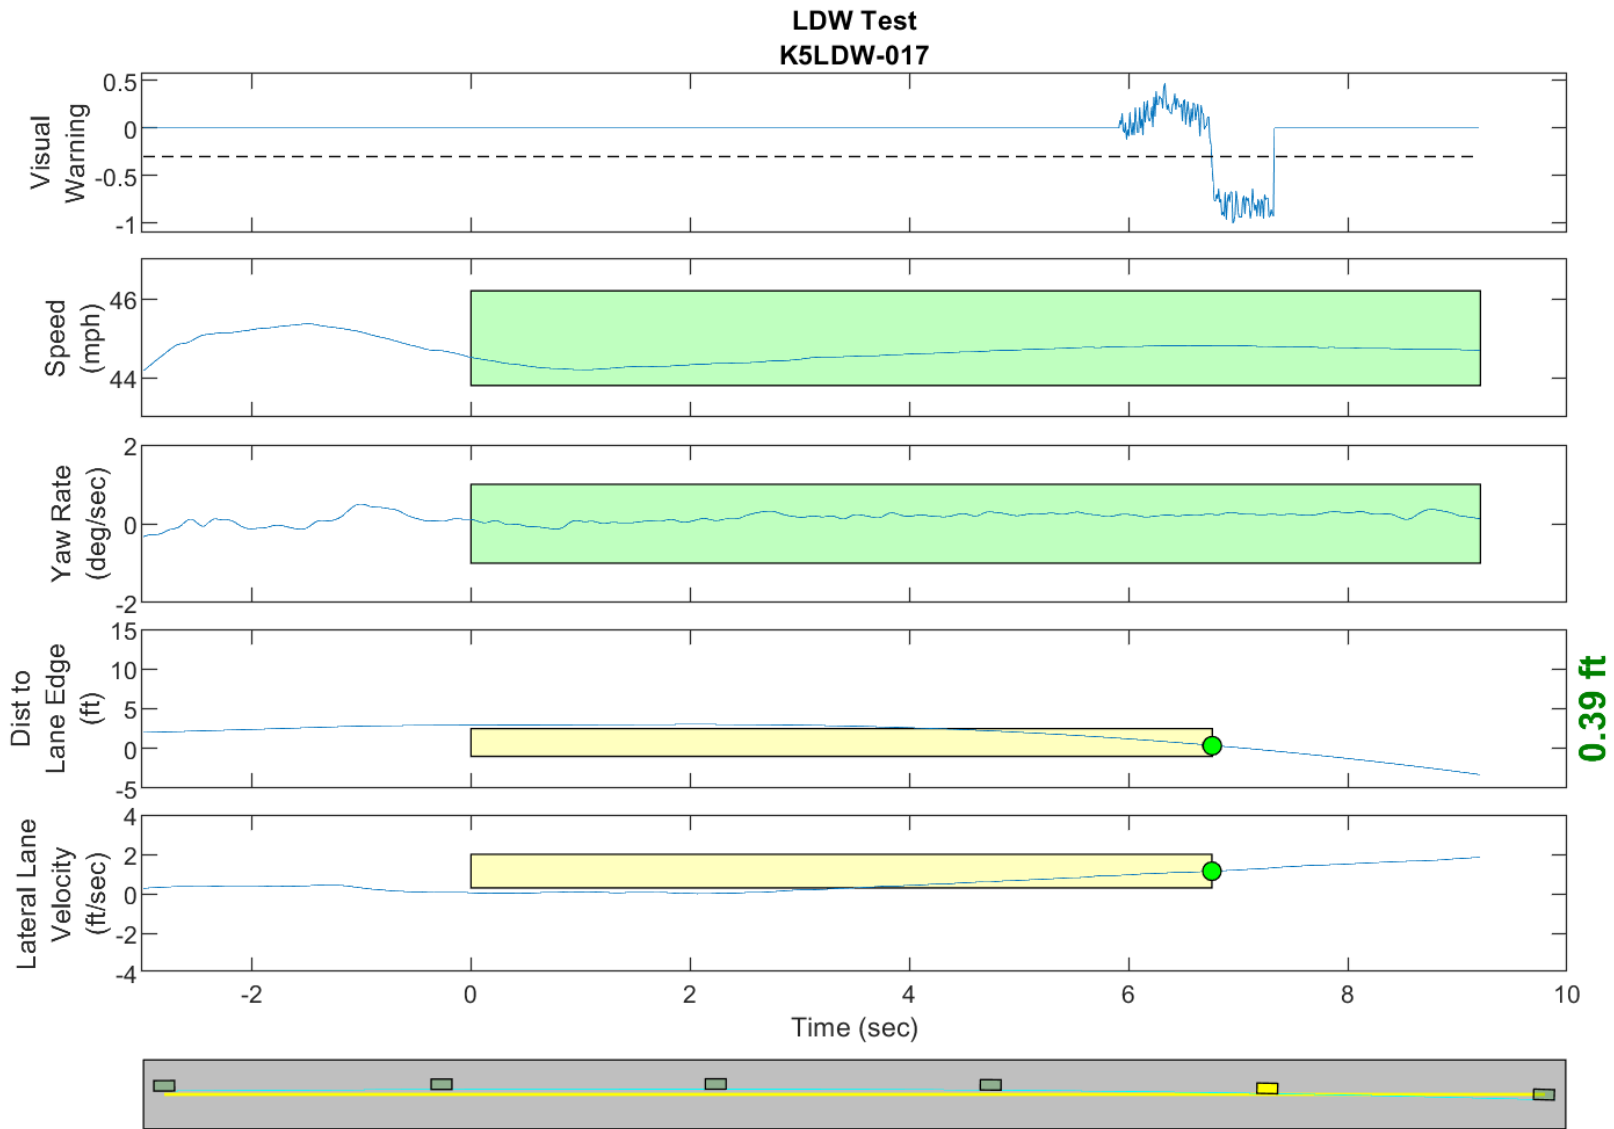


GPS Fix Type: RTK Fixed

Figure D35. Time History for Run 17, Dashed Line, Right Departure, Visual Warning

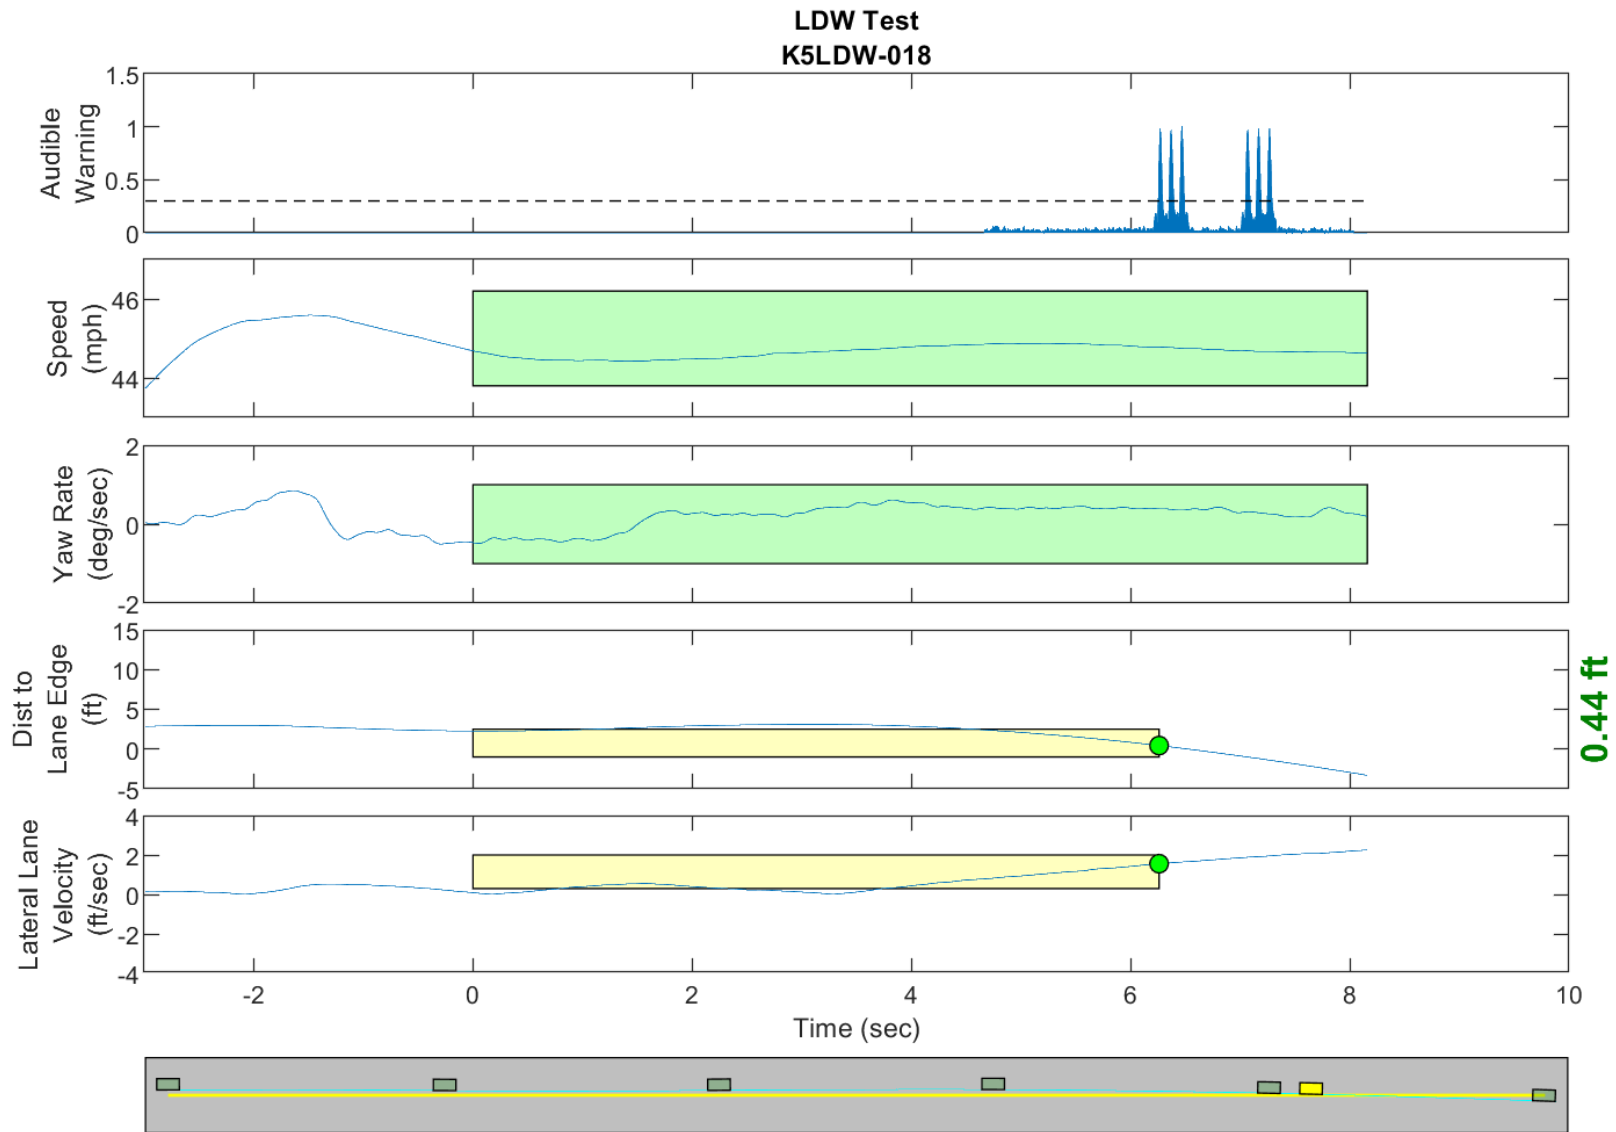


GPS Fix Type: RTK Fixed

Figure D36. Time History for Run 18, Dashed Line, Right Departure, Audible Warning

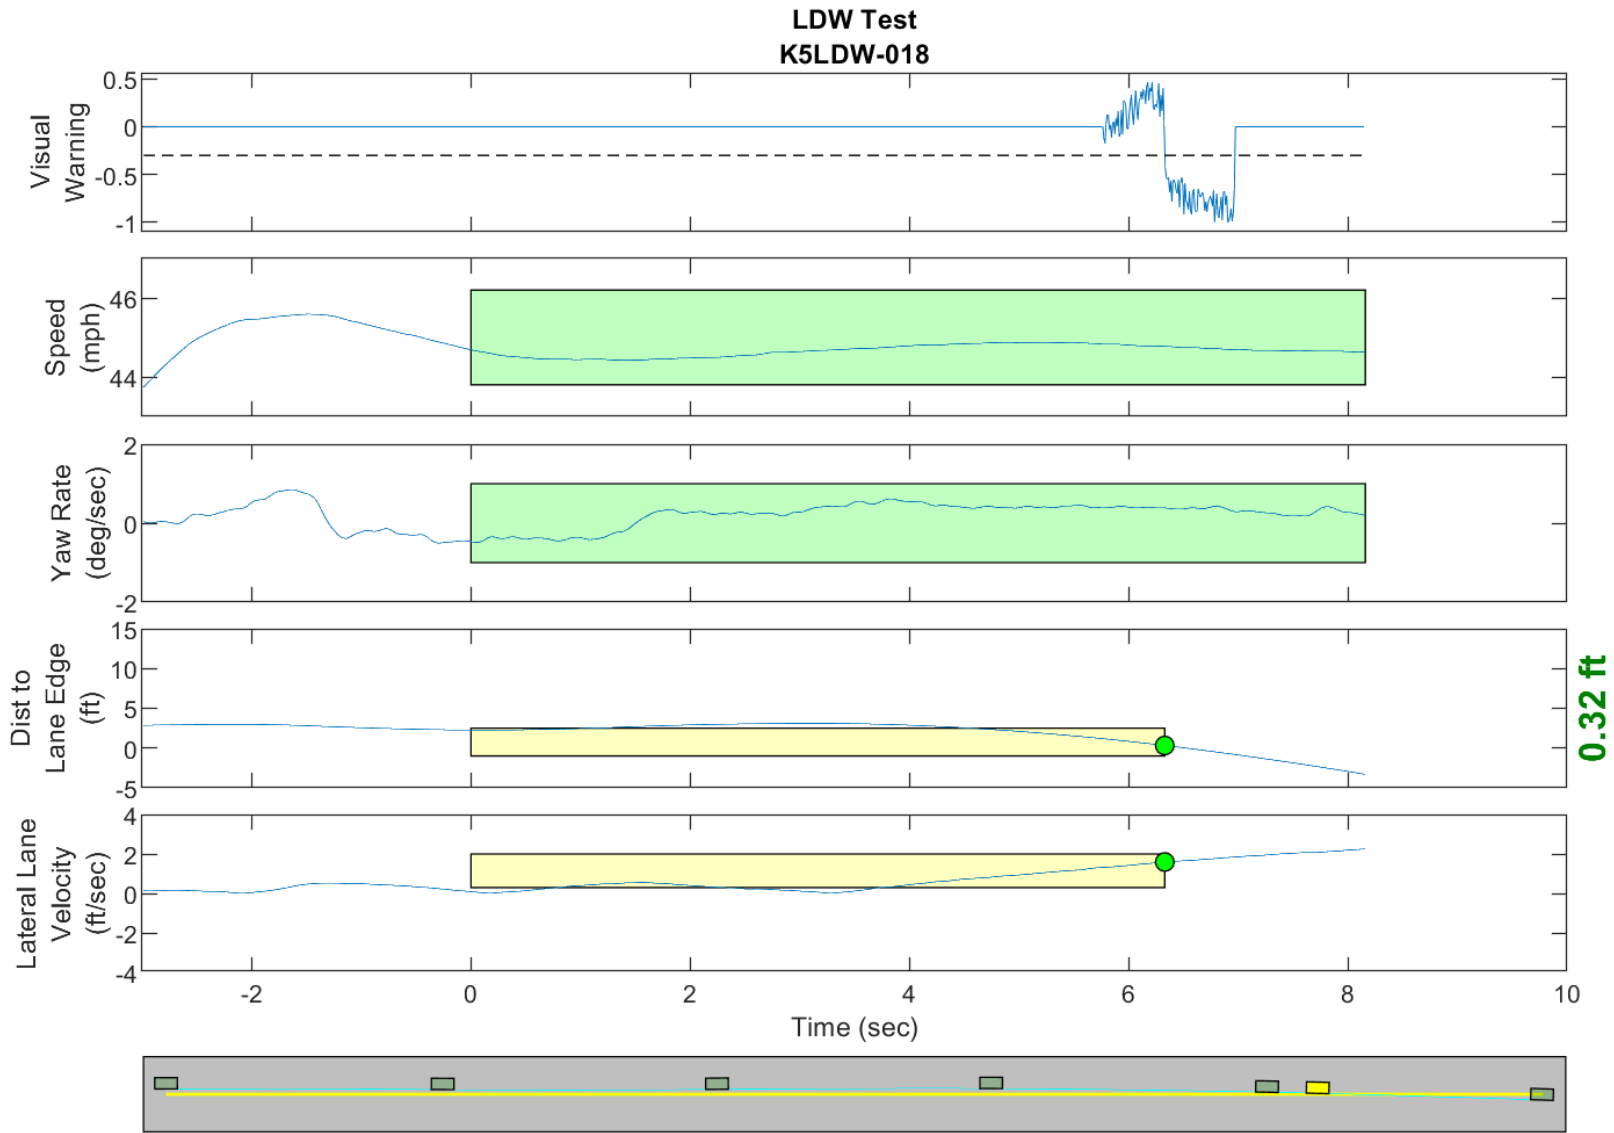


GPS Fix Type: RTK Fixed

Figure D37. Time History for Run 18, Dashed Line, Right Departure, Visual Warning

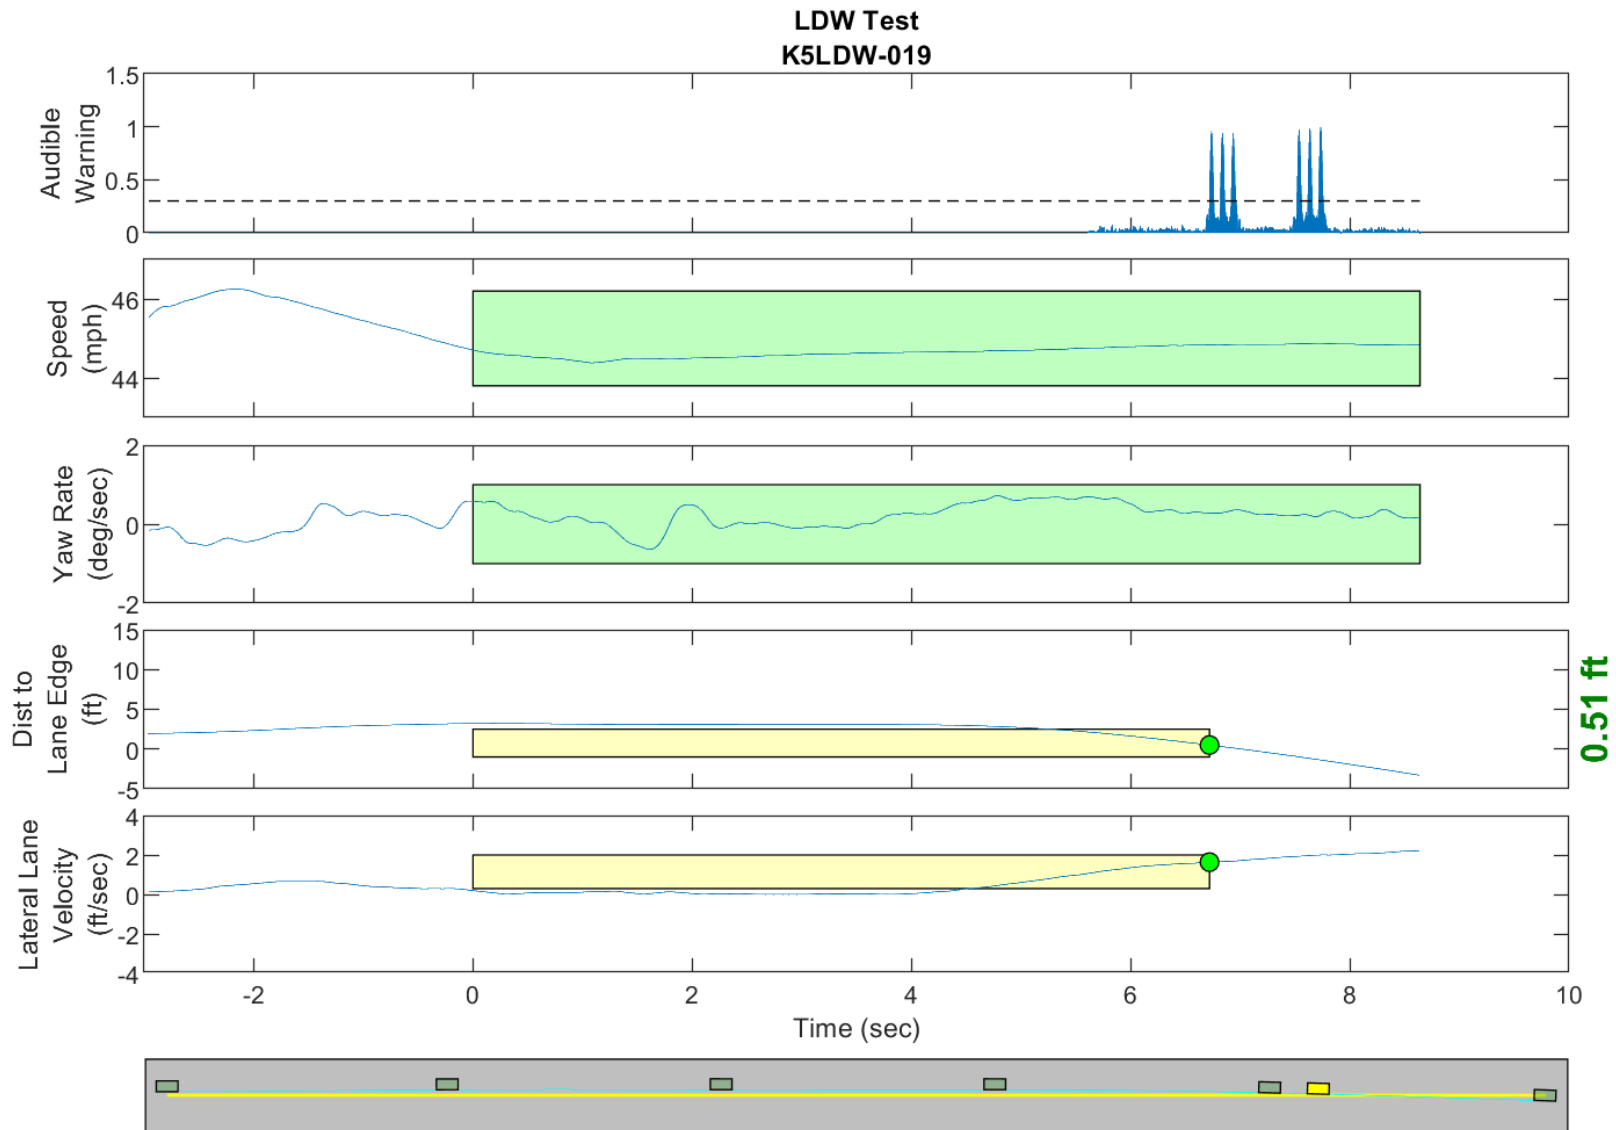


GPS Fix Type: RTK Fixed

Figure D38. Time History for Run 19, Dashed Line, Right Departure, Audible Warning

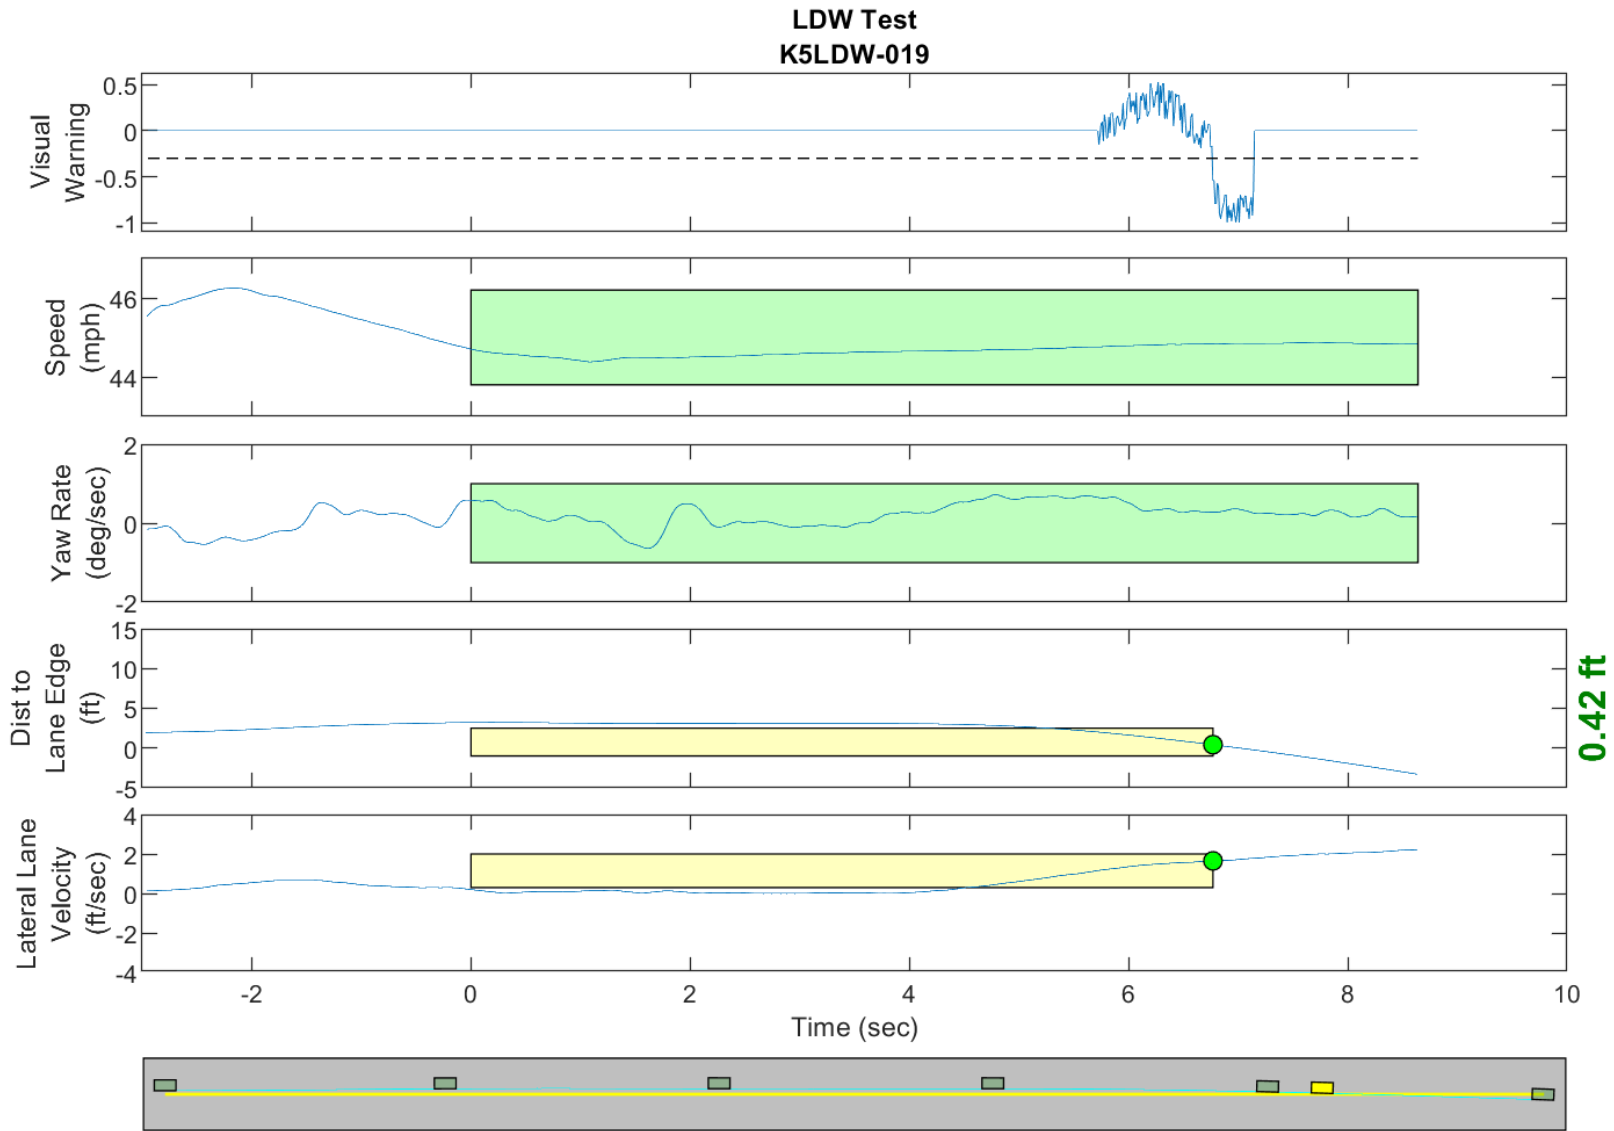


GPS Fix Type: RTK Fixed

Figure D39. Time History for Run 19, Dashed Line, Right Departure, Visual Warning

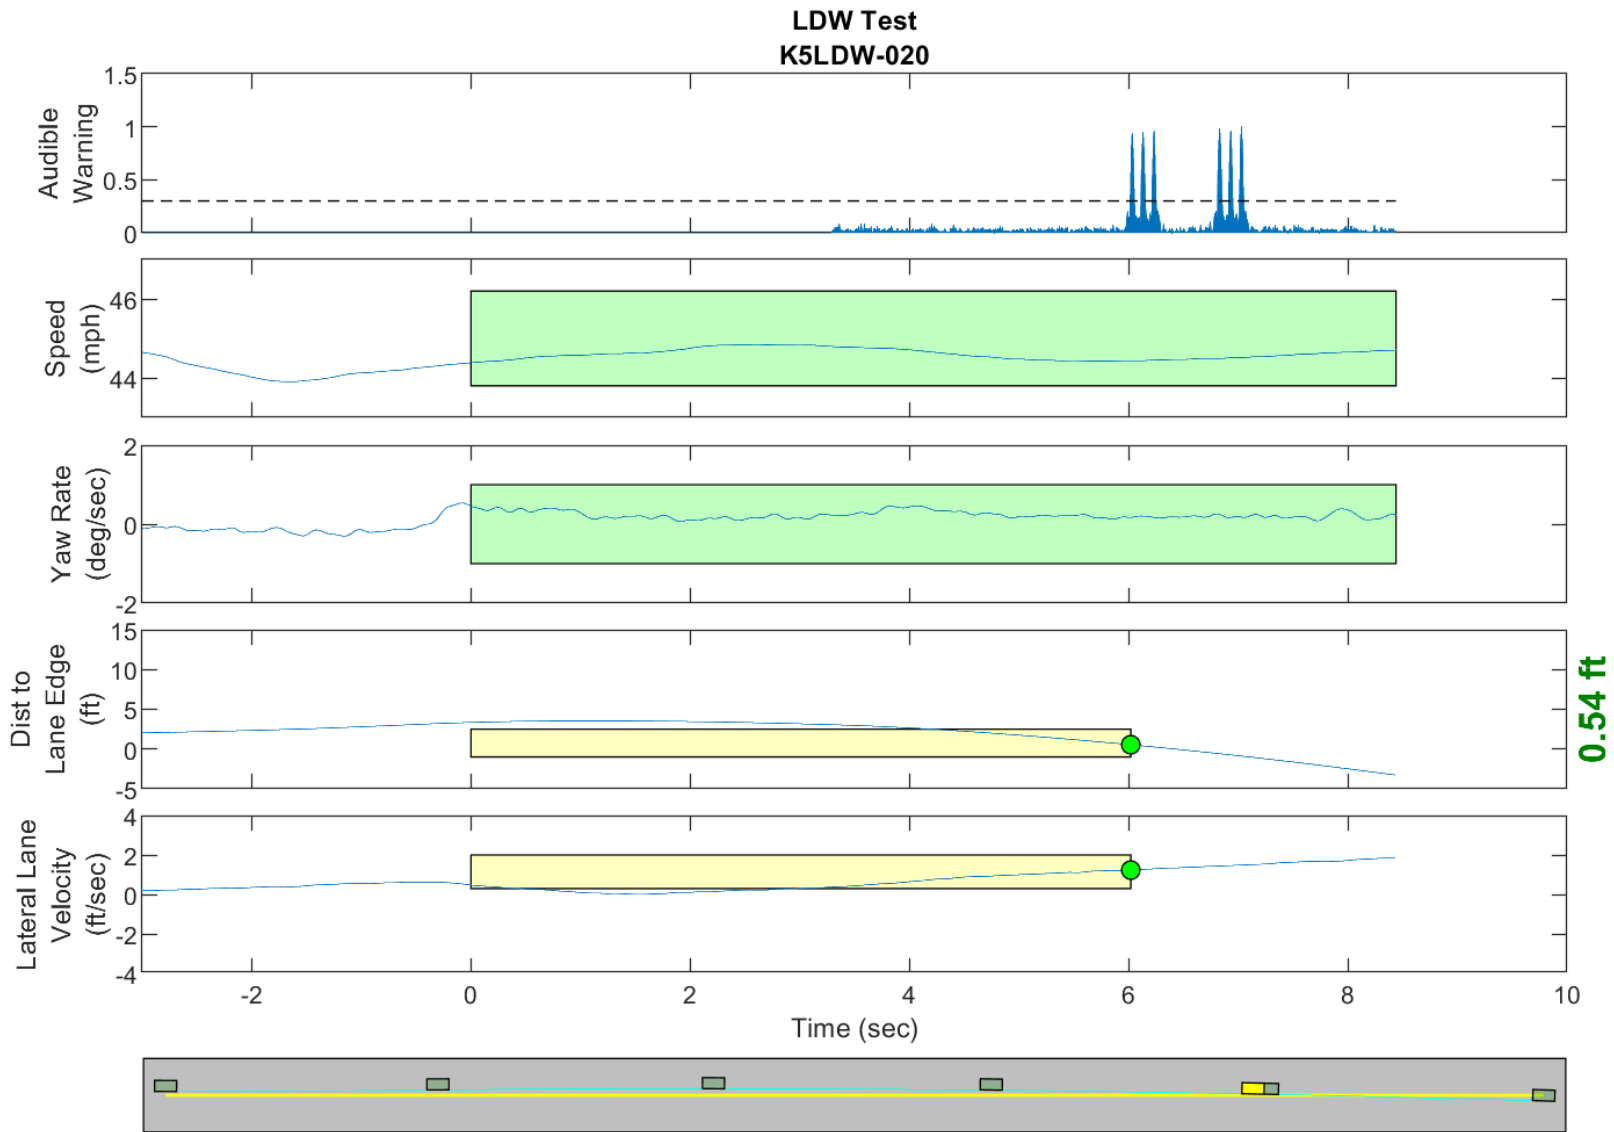


GPS Fix Type: RTK Fixed

Figure D40. Time History for Run 20, Dashed Line, Right Departure, Audible Warning

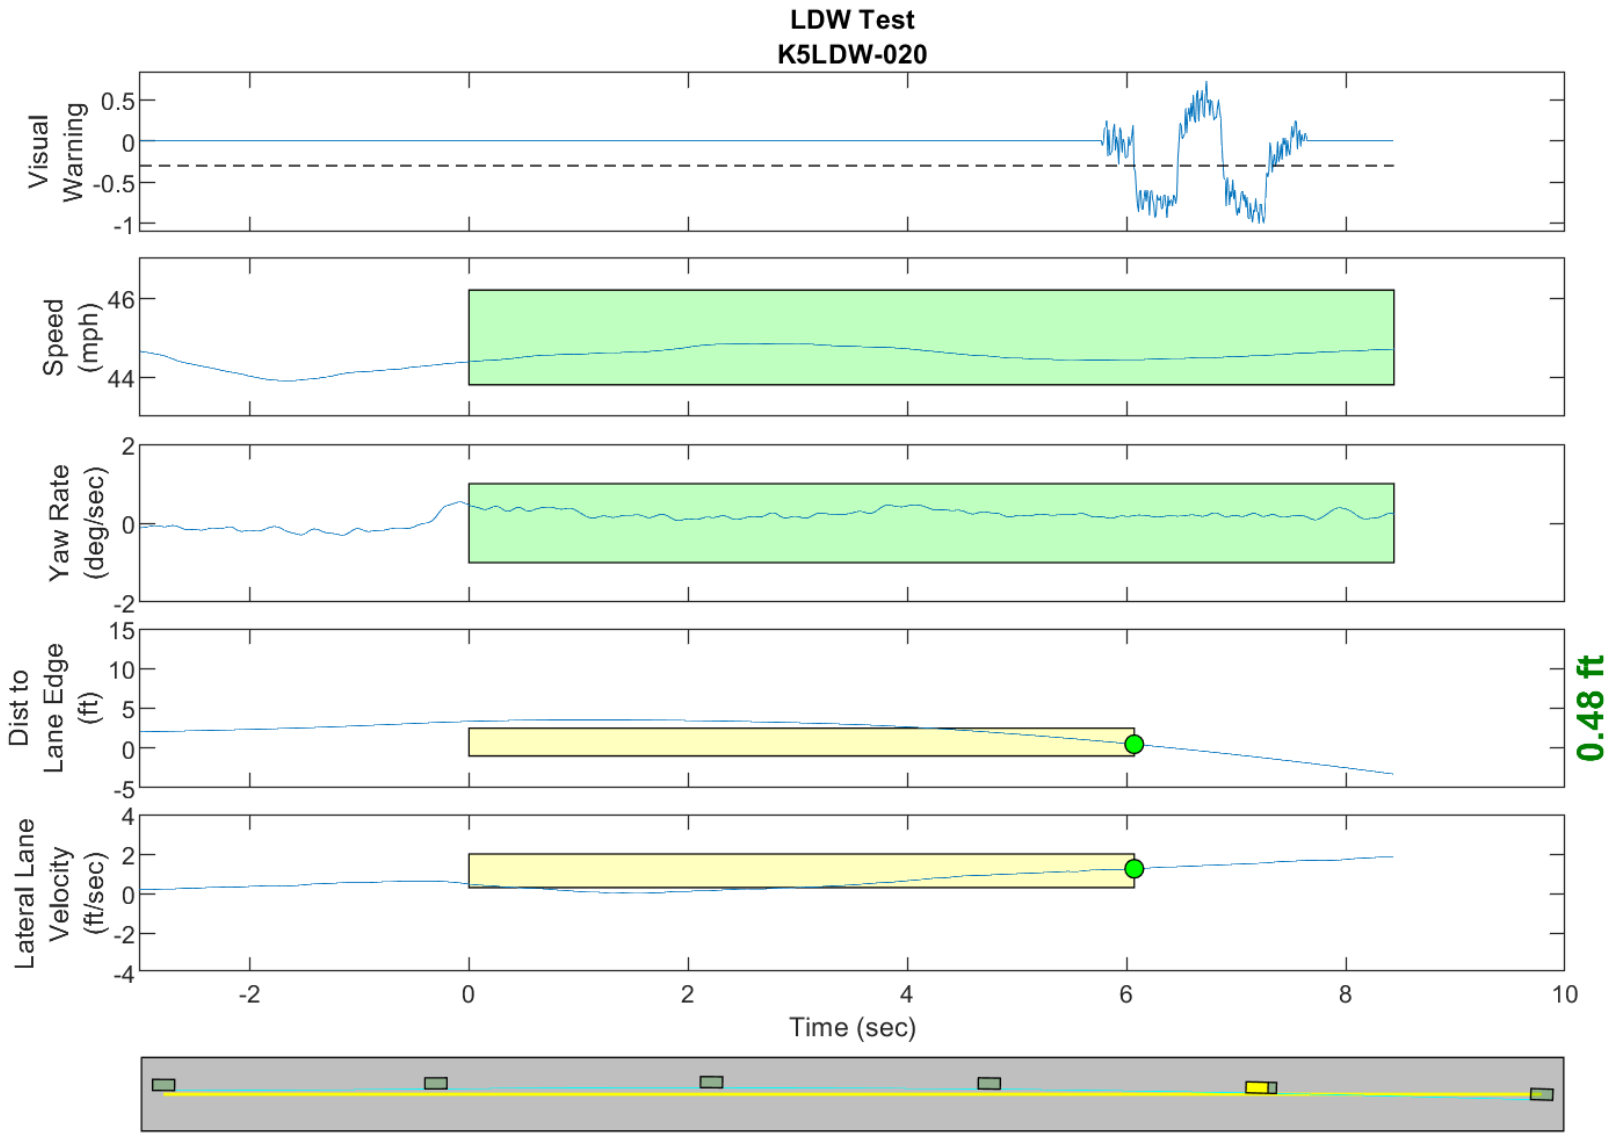


GPS Fix Type: RTK Fixed

Figure D41. Time History for Run 20, Dashed Line, Right Departure, Visual Warning

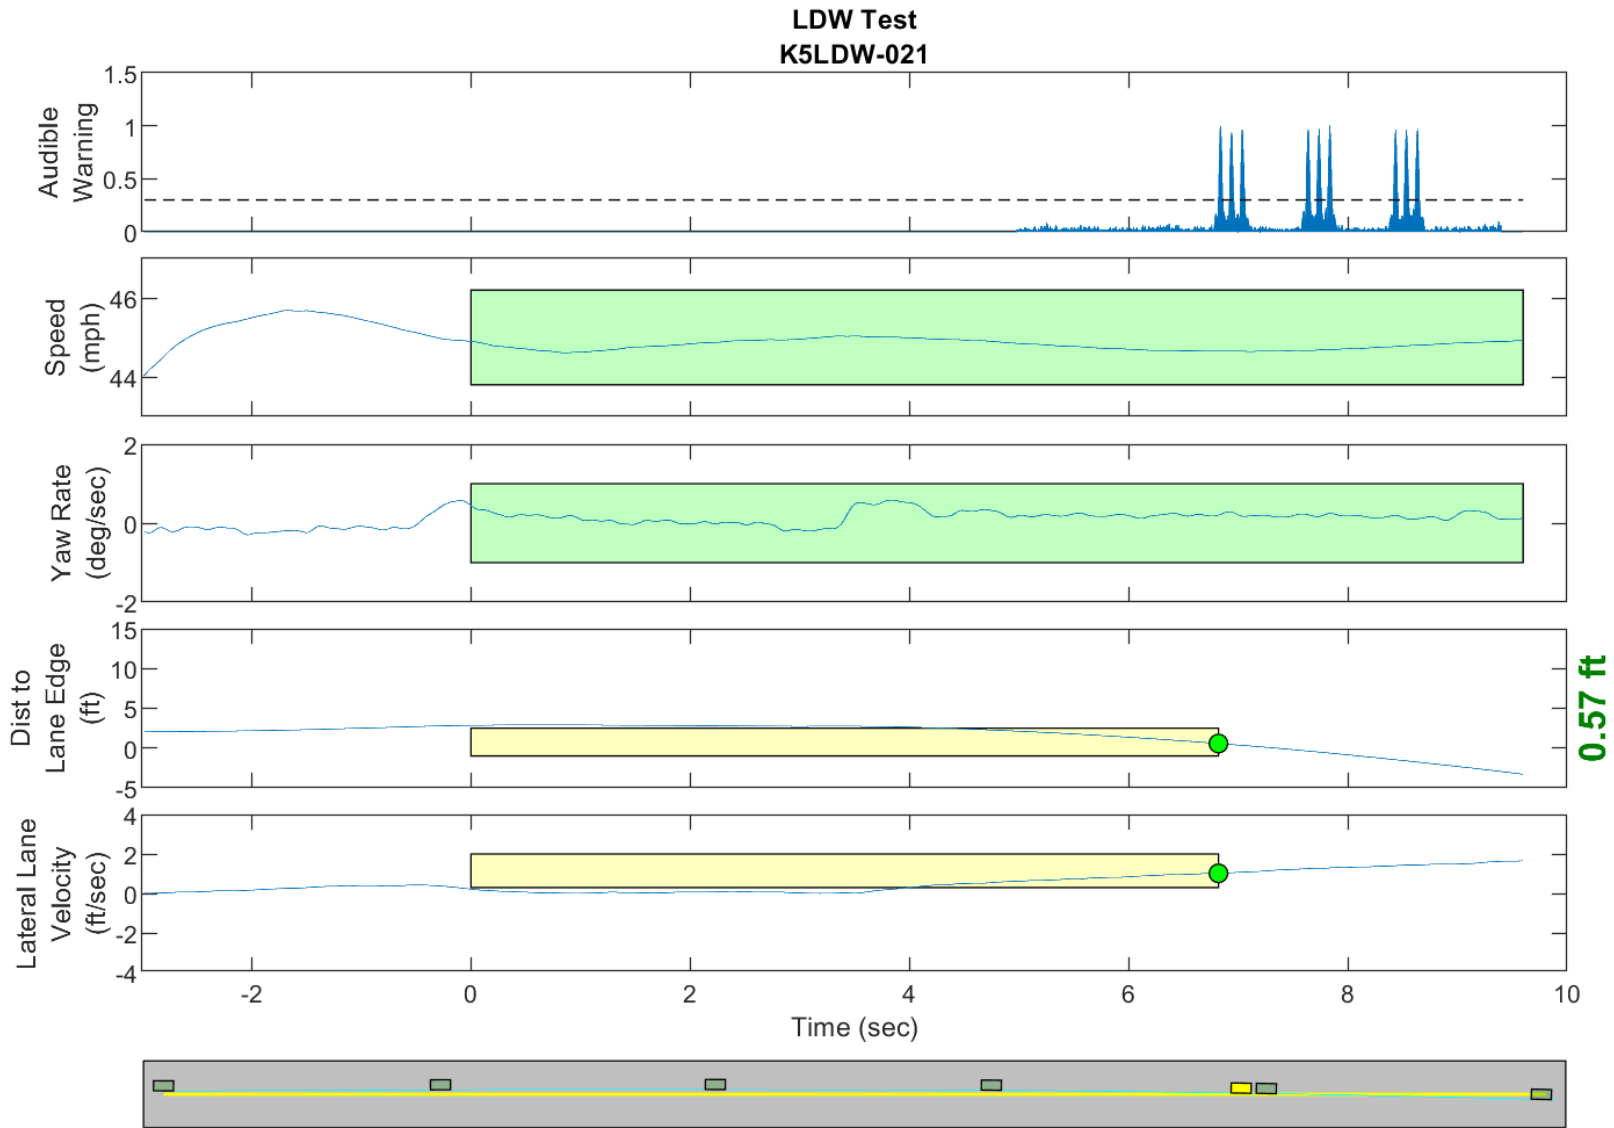


GPS Fix Type: RTK Fixed

Figure D42. Time History for Run 21, Dashed Line, Right Departure, Audible Warning

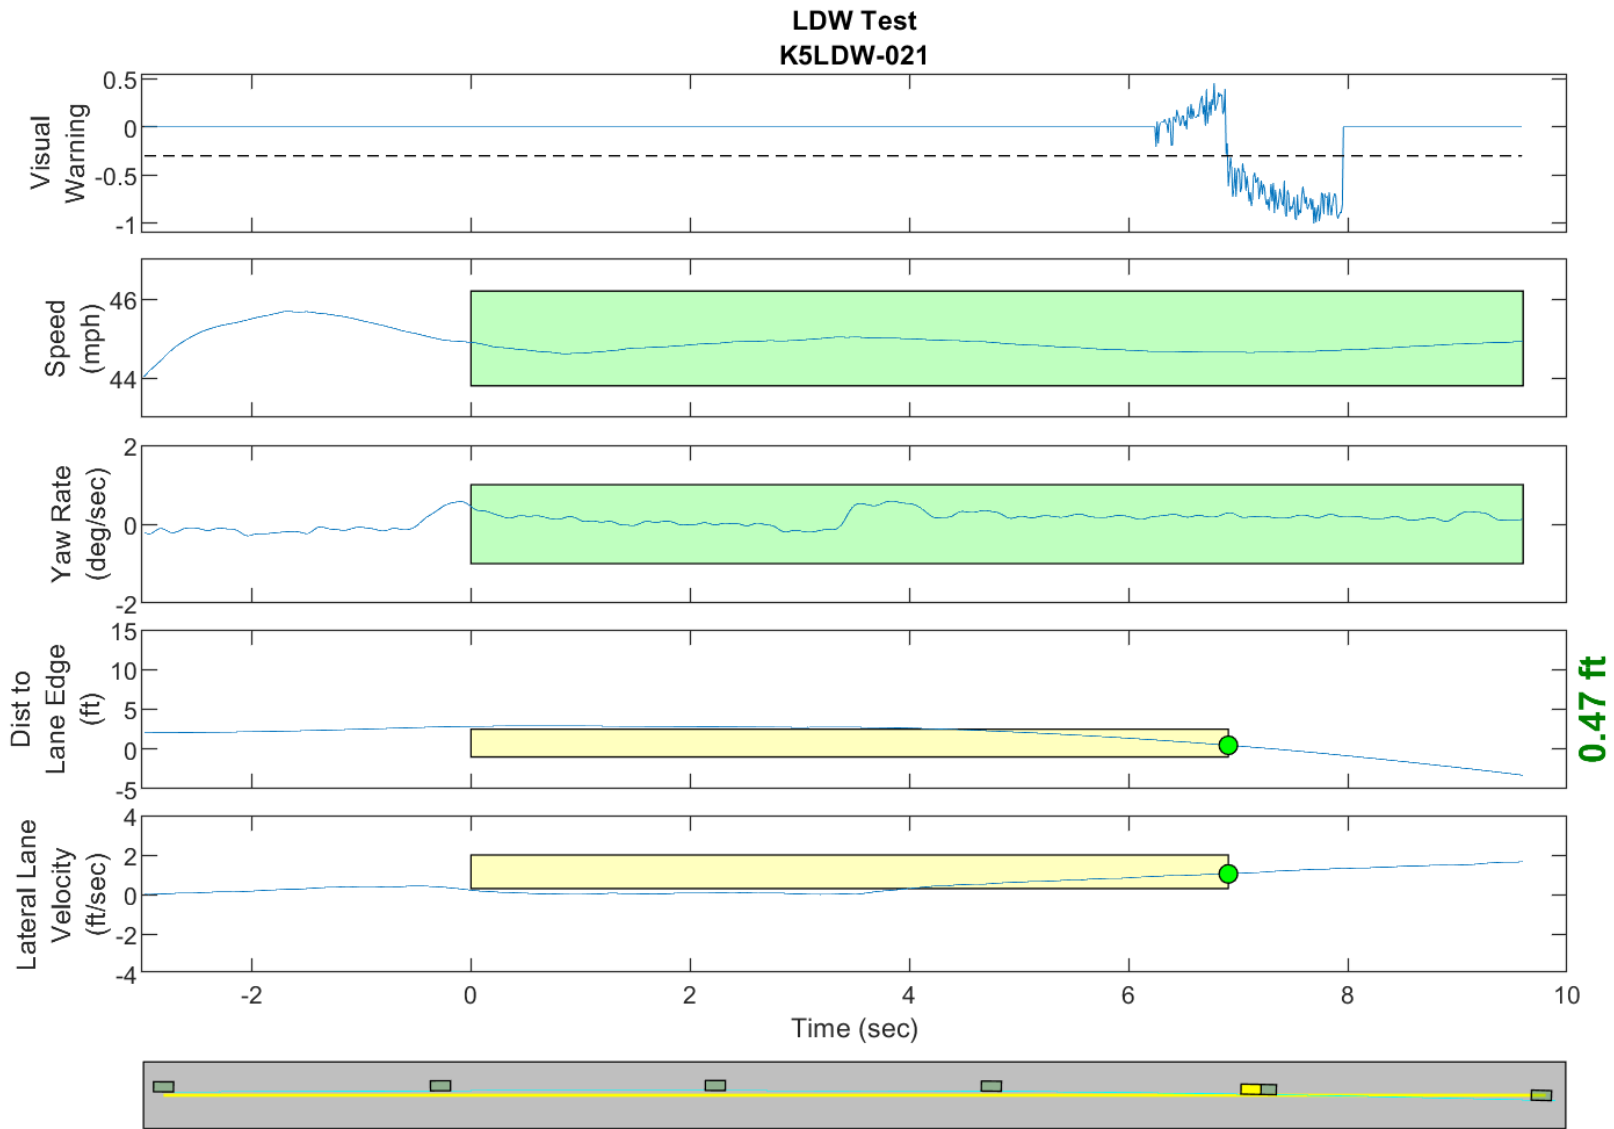


GPS Fix Type: RTK Fixed

Figure D43. Time History for Run 21, Dashed Line, Right Departure, Visual Warning

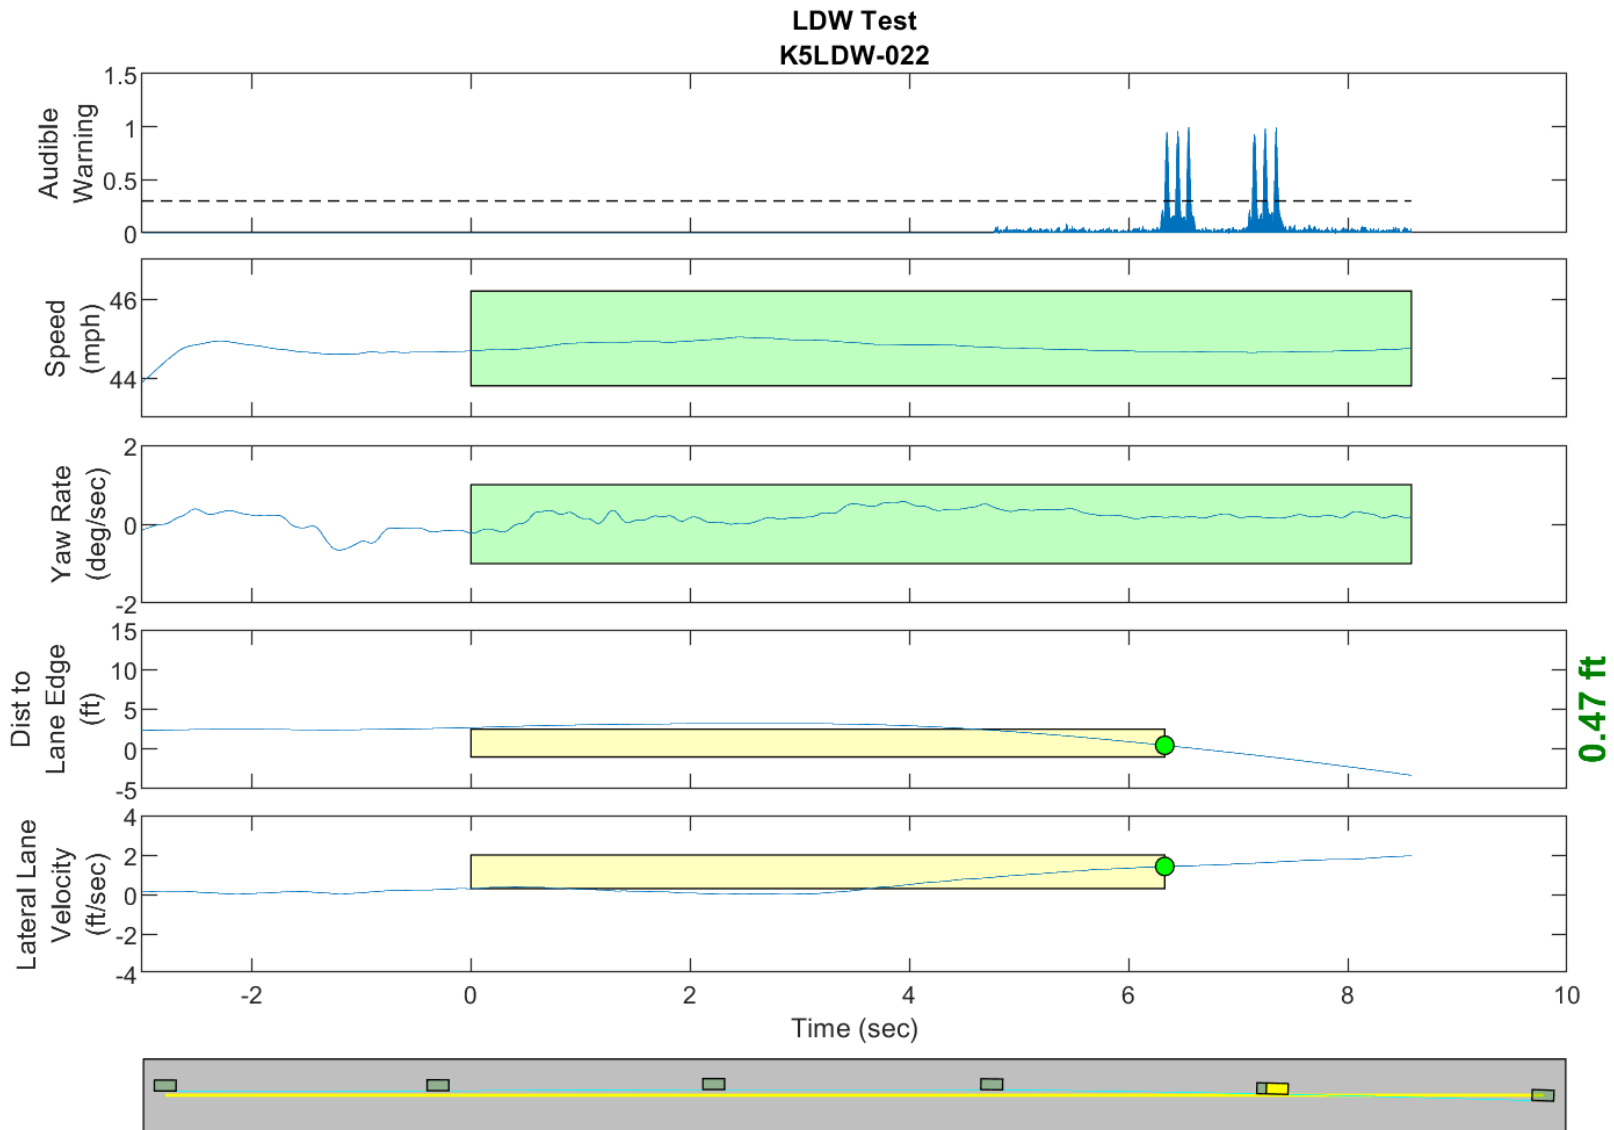


GPS Fix Type: RTK Fixed

Figure D44. Time History for Run 22, Dashed Line, Right Departure, Audible Warning

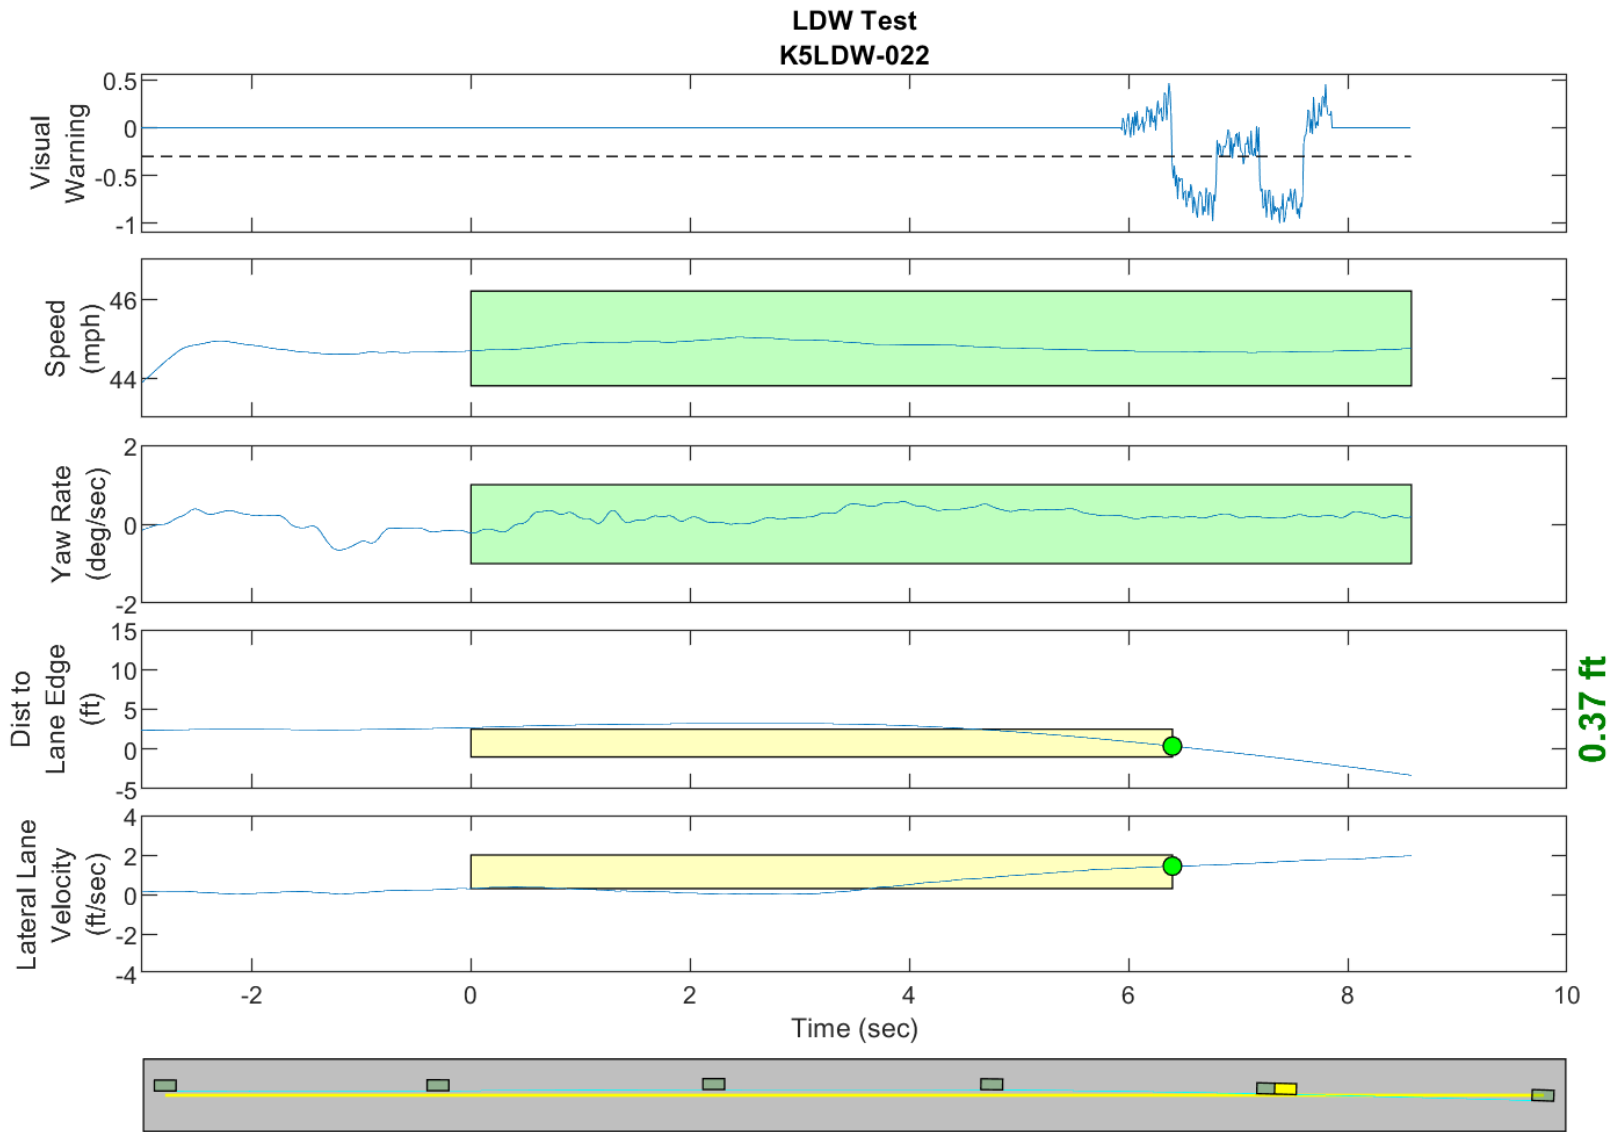


GPS Fix Type: RTK Fixed

Figure D45. Time History for Run 22, Dashed Line, Right Departure, Visual Warning

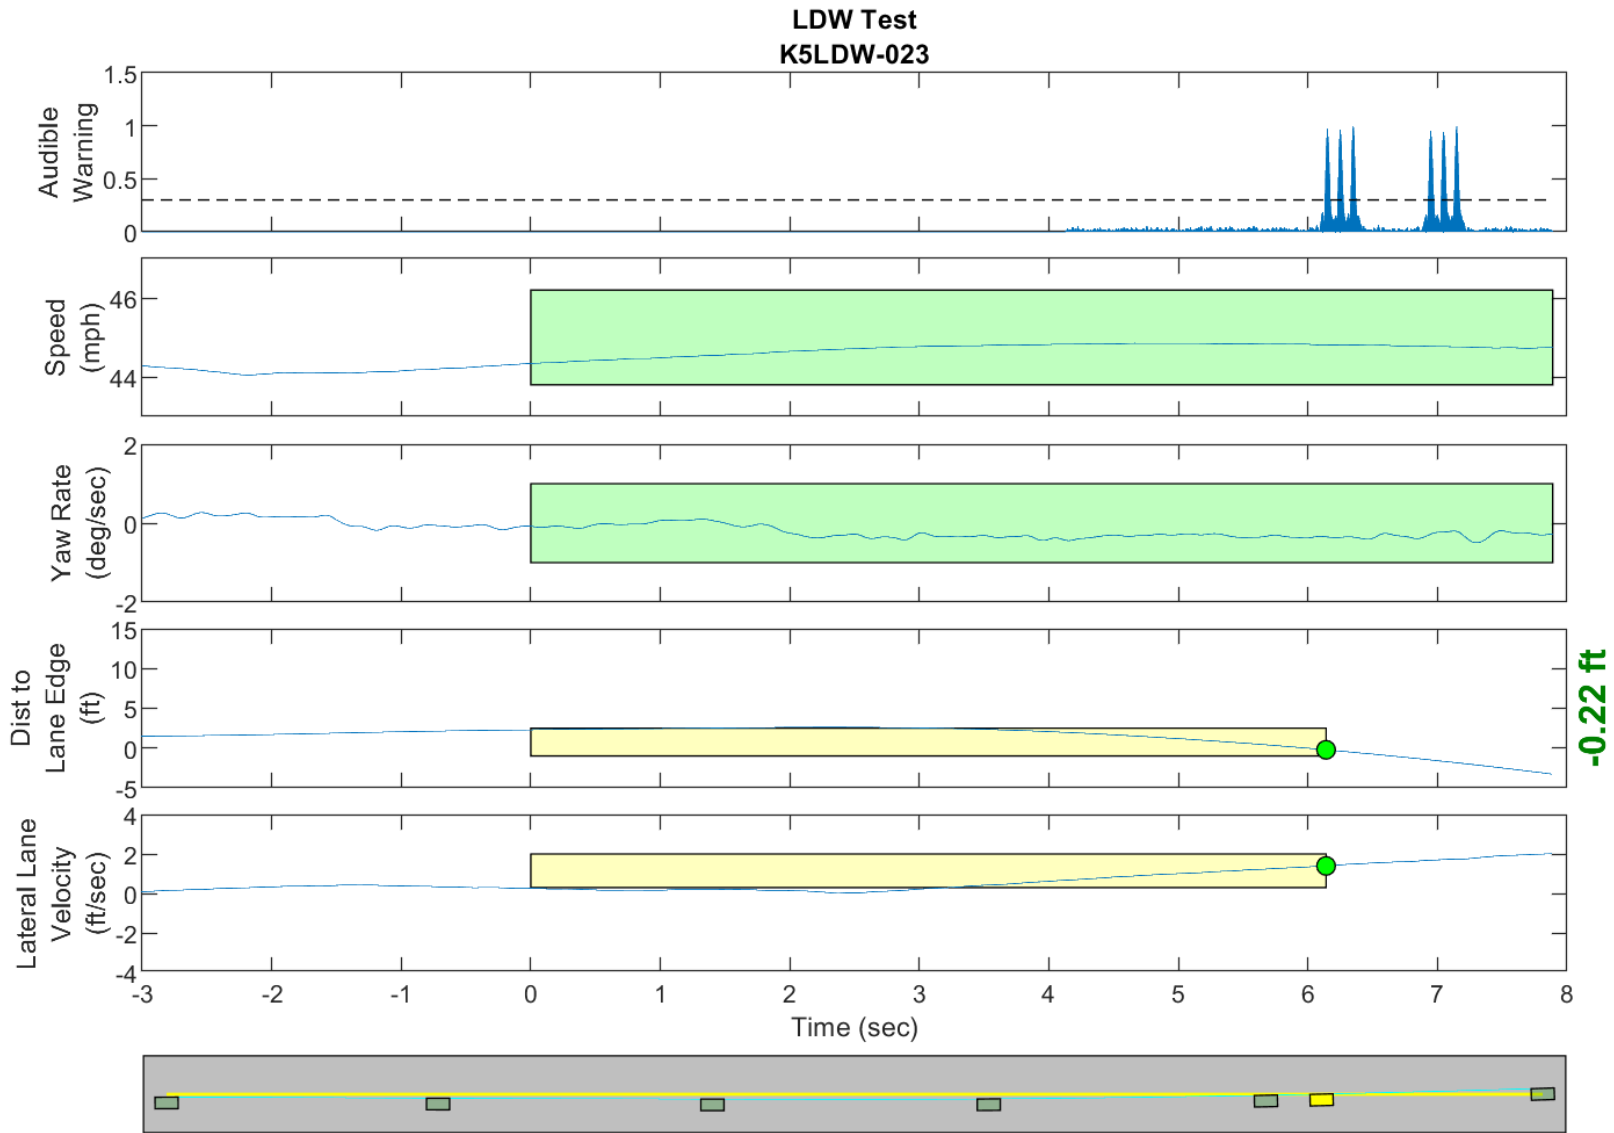


GPS Fix Type: RTK Fixed

Figure D46. Time History for Run 23, Dashed Line, Left Departure, Audible Warning

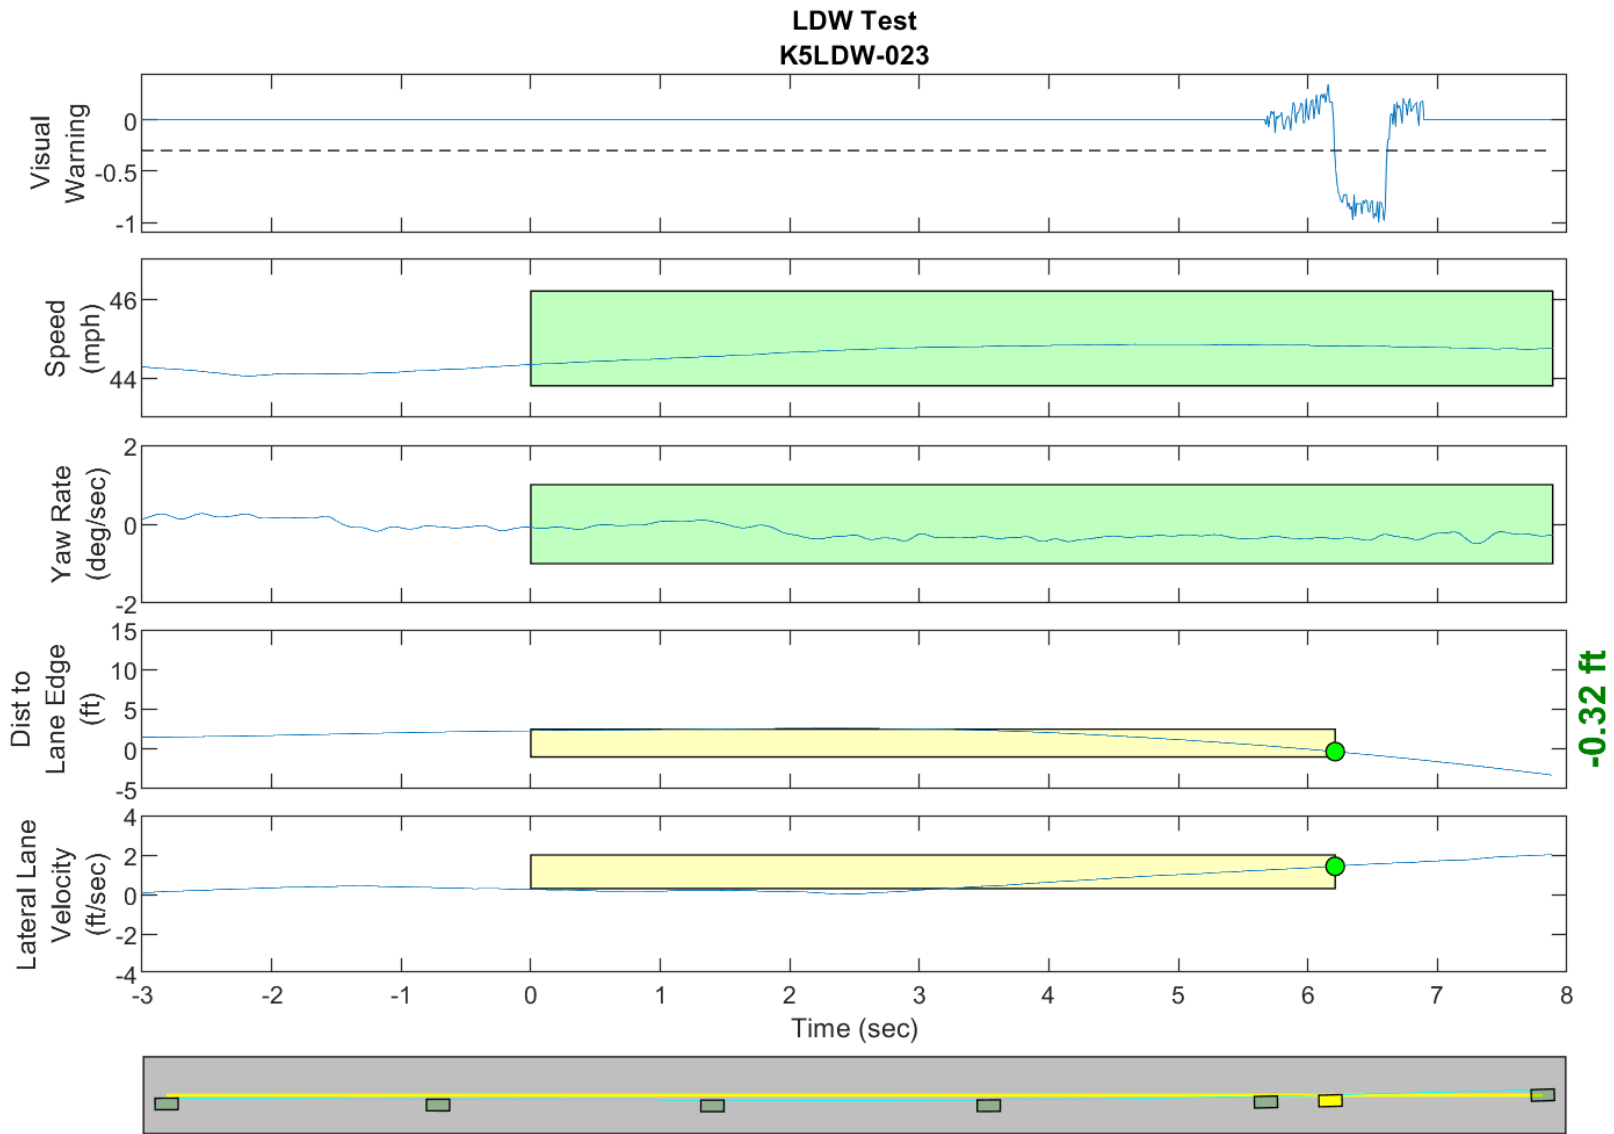


GPS Fix Type: RTK Fixed

Figure D47. Time History for Run 23, Dashed Line, Left Departure, Visual Warning

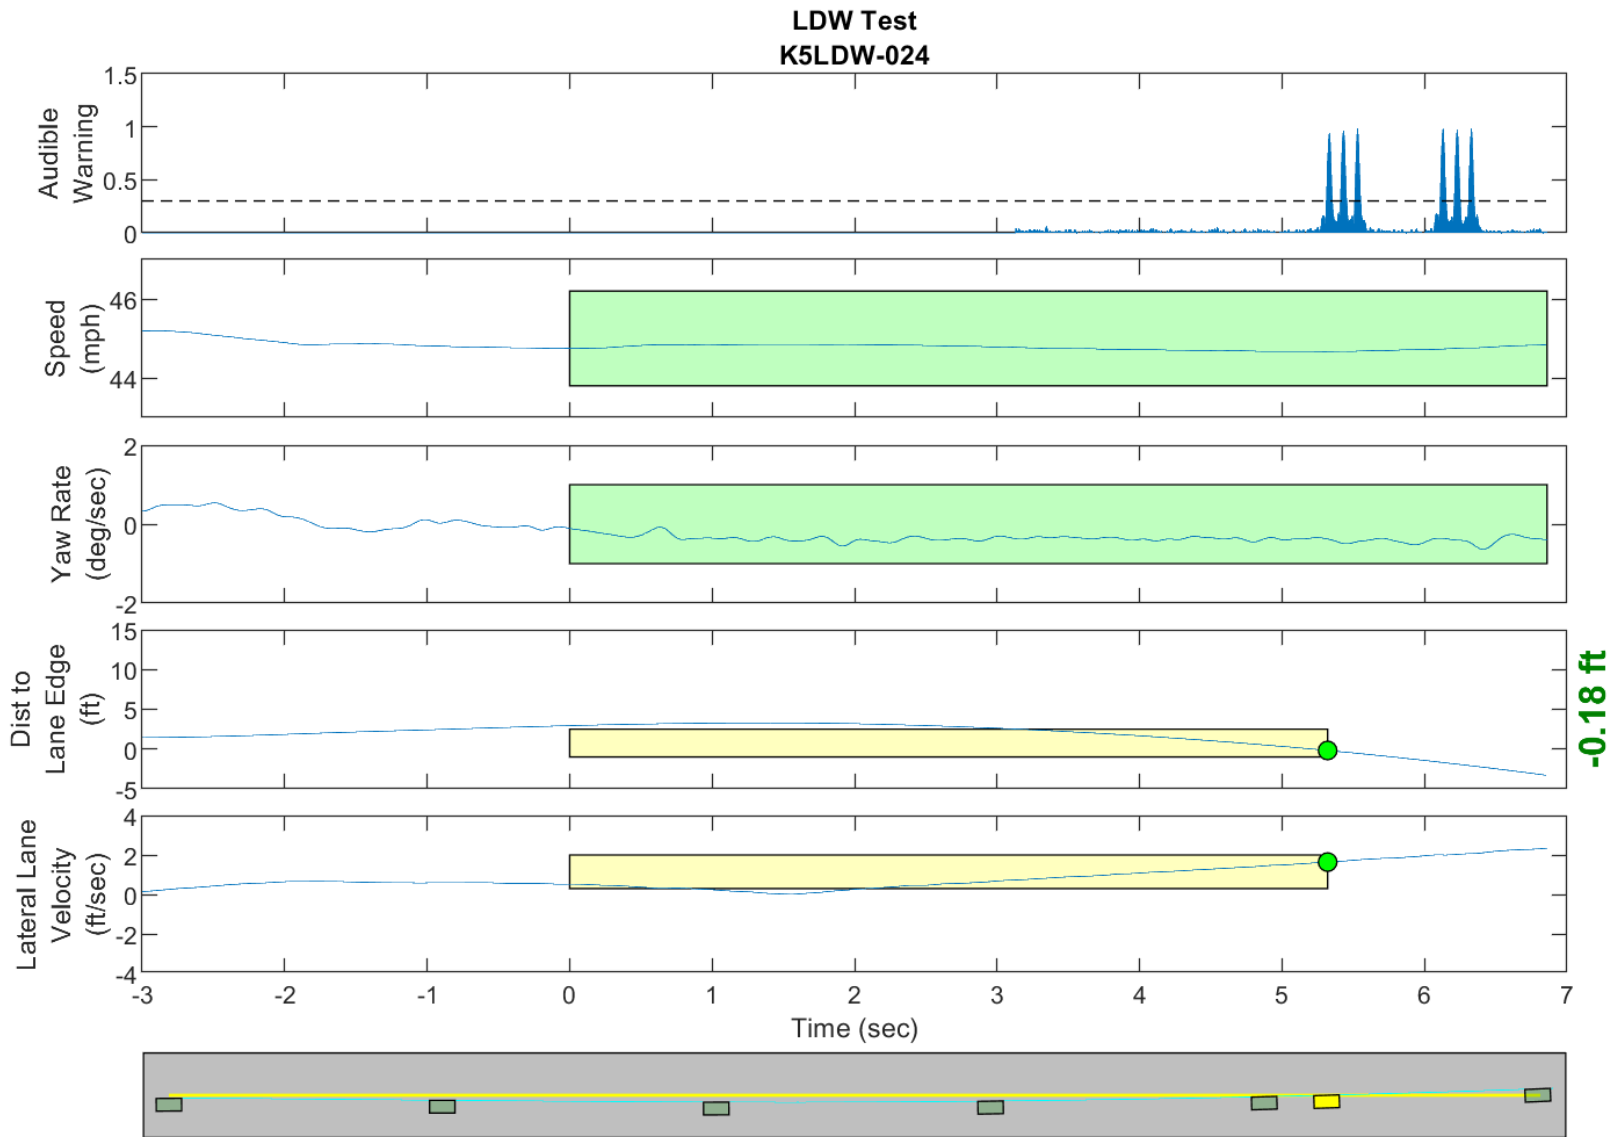


GPS Fix Type: RTK Fixed

Figure D48. Time History for Run 24, Dashed Line, Left Departure, Audible Warning

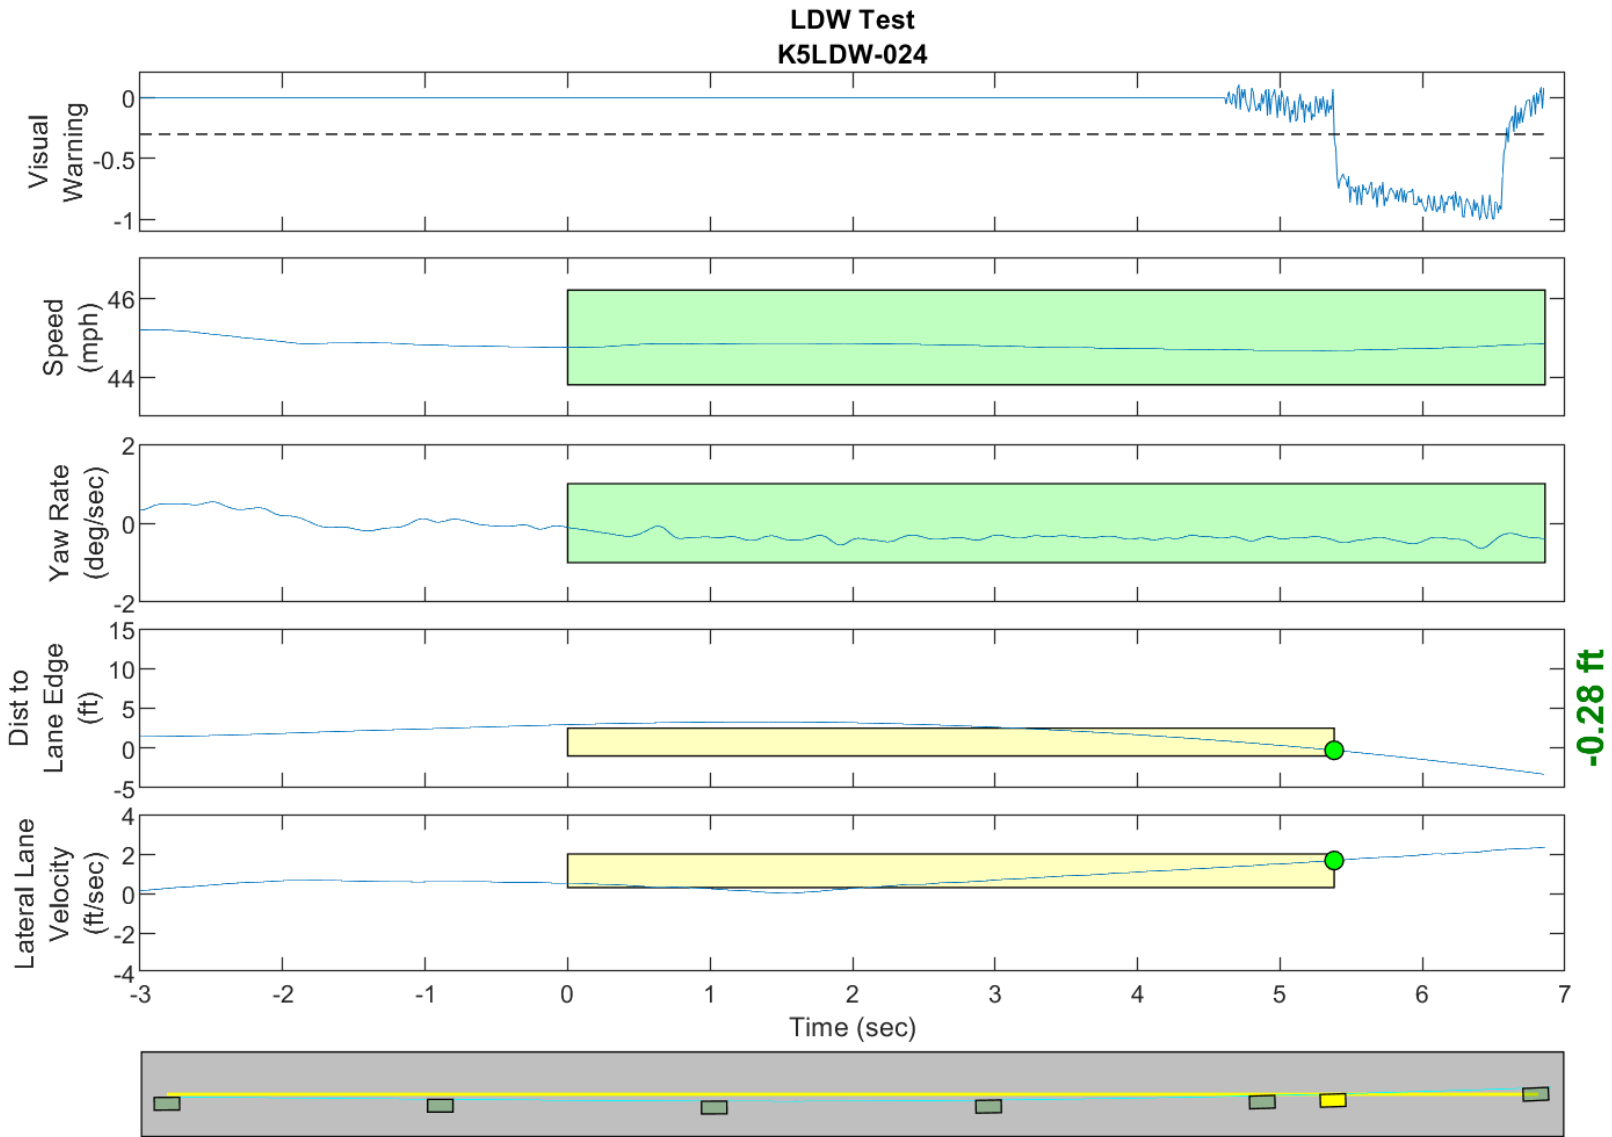


GPS Fix Type: RTK Fixed

Figure D49. Time History for Run 24, Dashed Line, Left Departure, Visual Warning

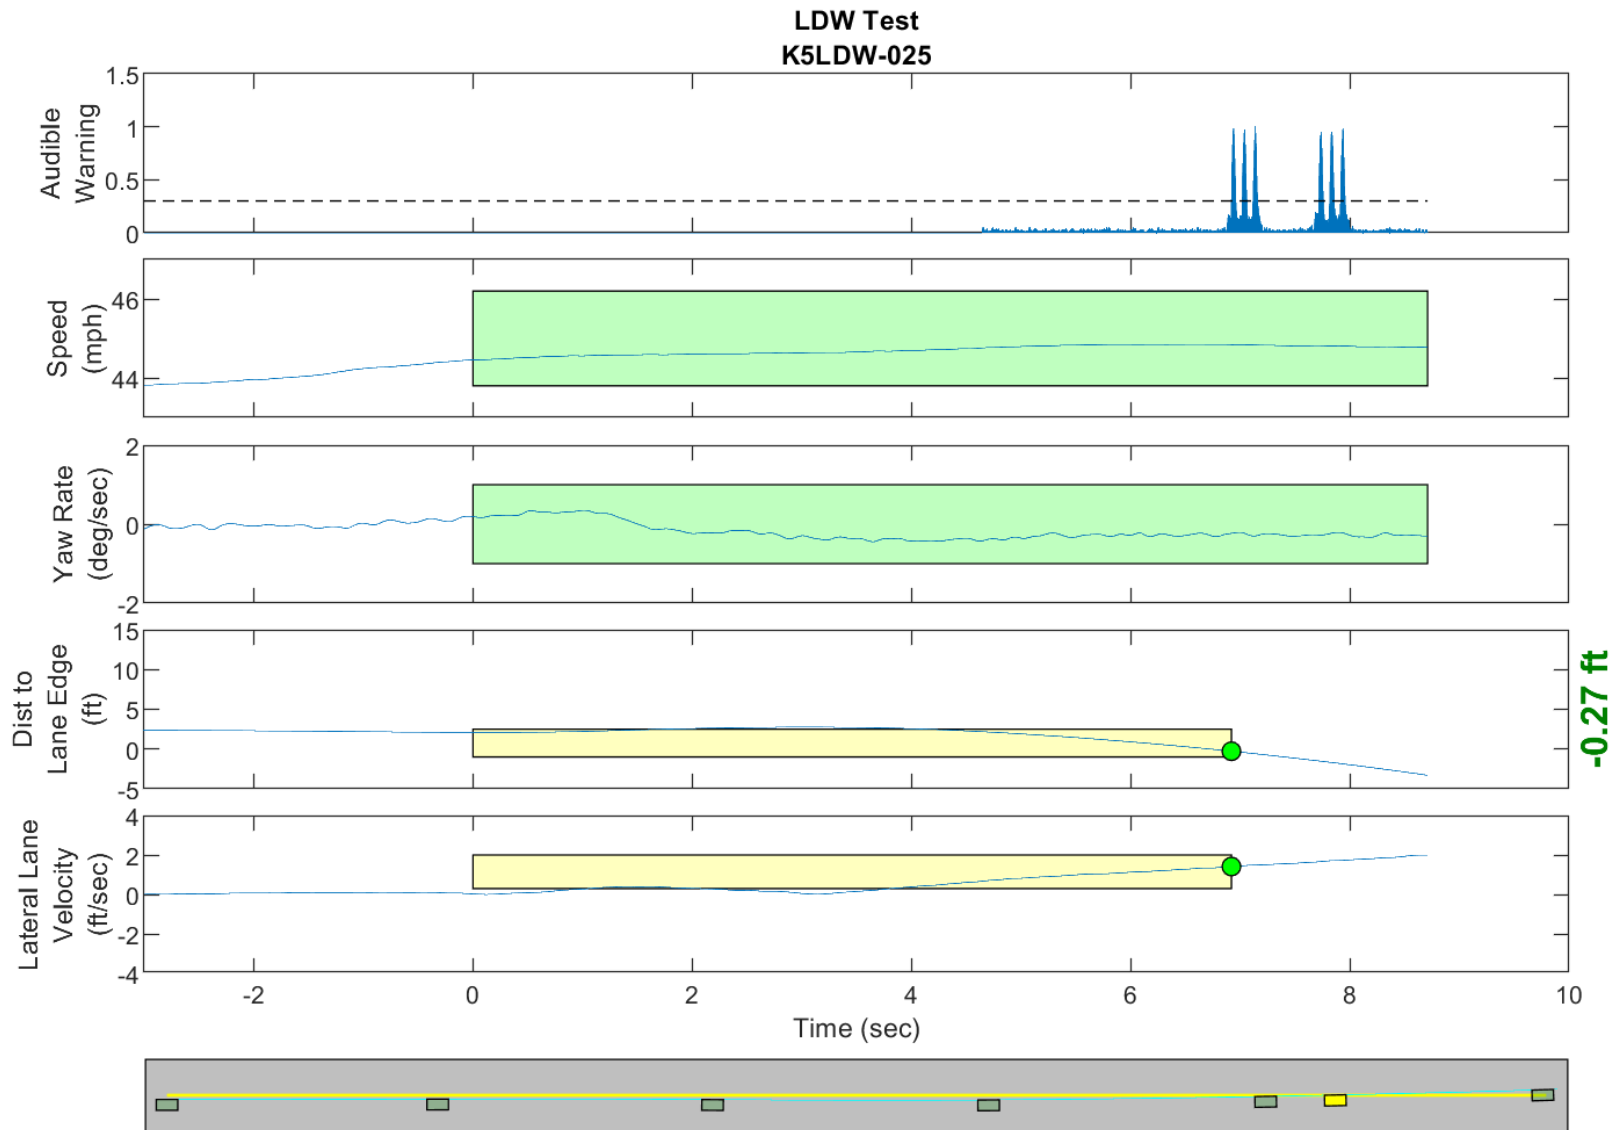


GPS Fix Type: RTK Fixed

Figure D50. Time History for Run 25, Dashed Line, Left Departure, Audible Warning

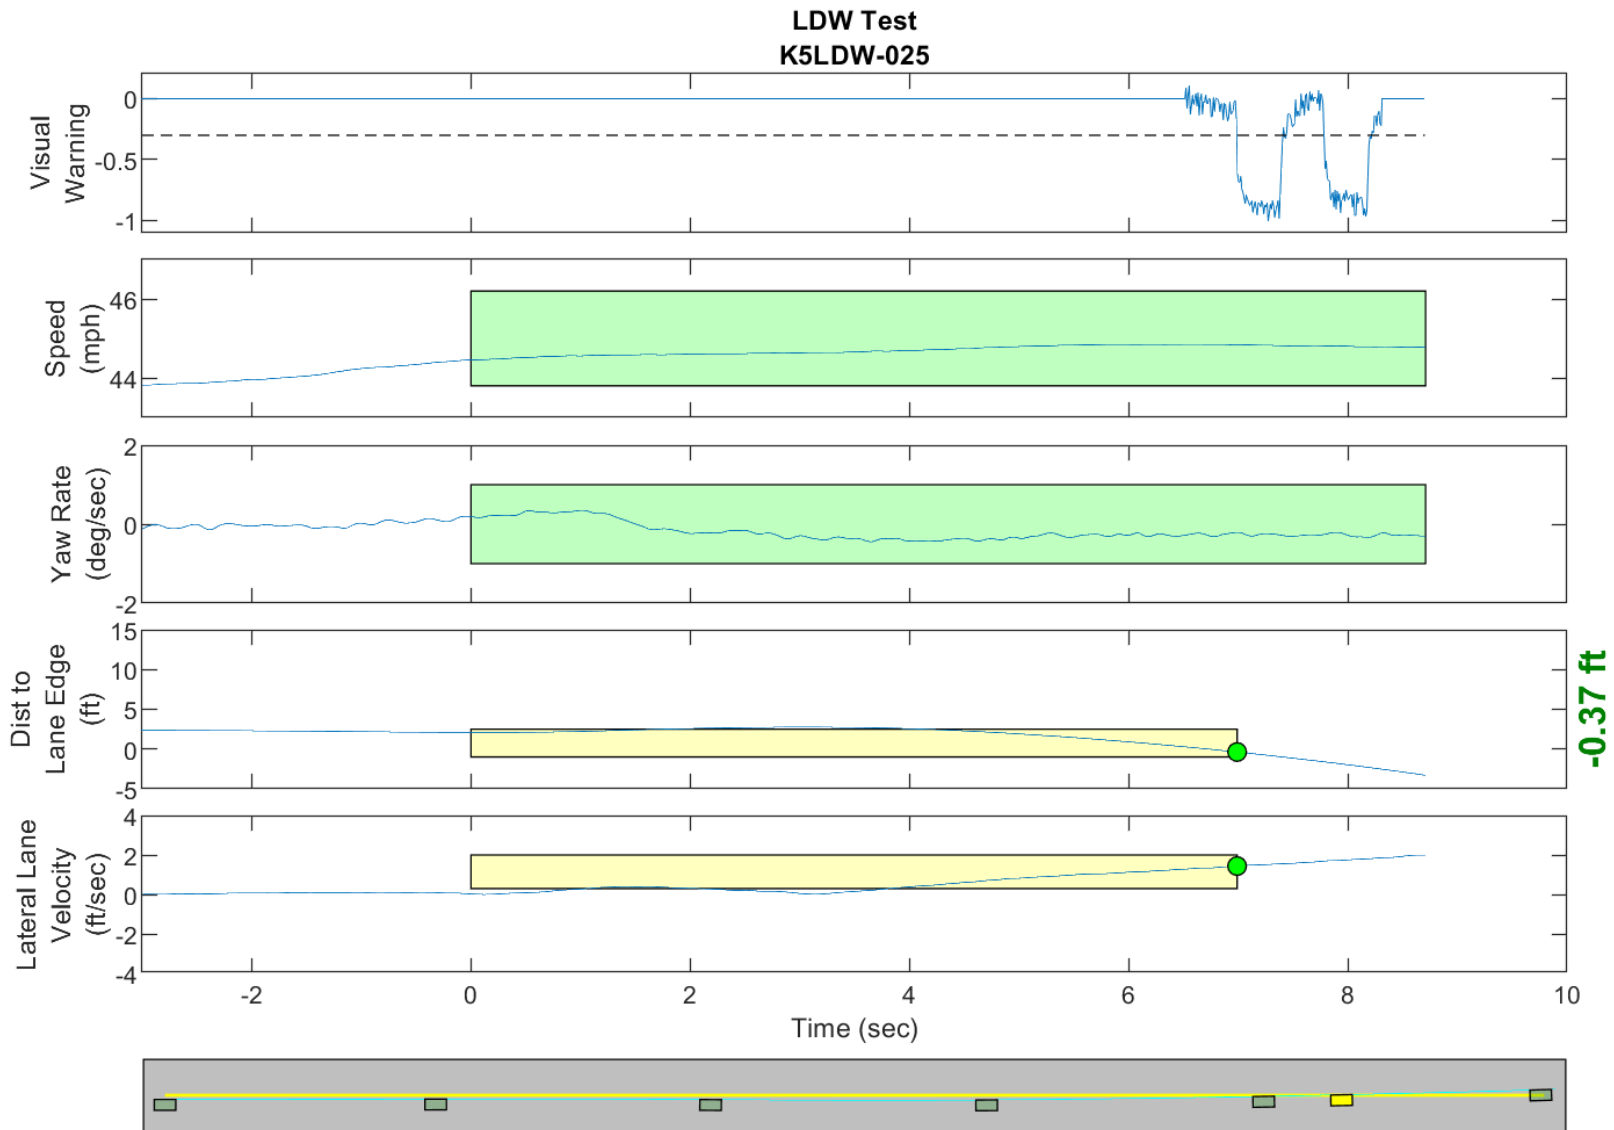


GPS Fix Type: RTK Fixed

Figure D51. Time History for Run 25, Dashed Line, Left Departure, Visual Warning

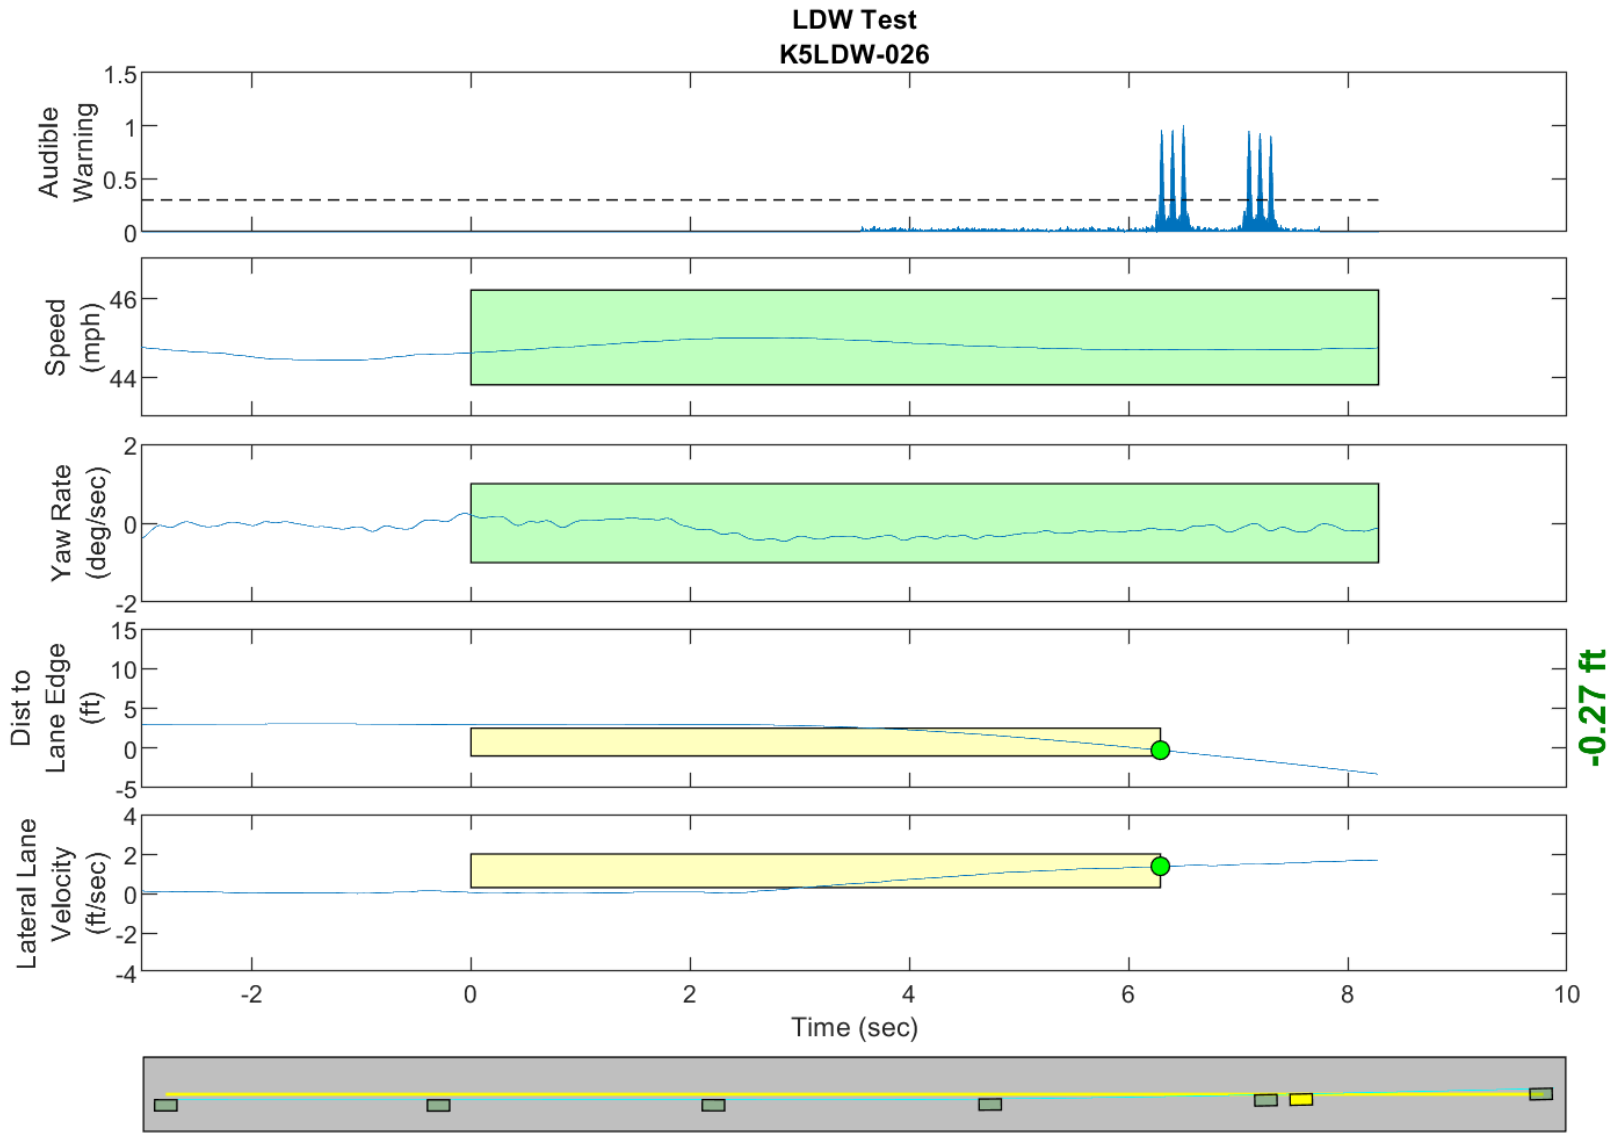


GPS Fix Type: RTK Fixed

Figure D52. Time History for Run 26, Dashed Line, Left Departure, Audible Warning

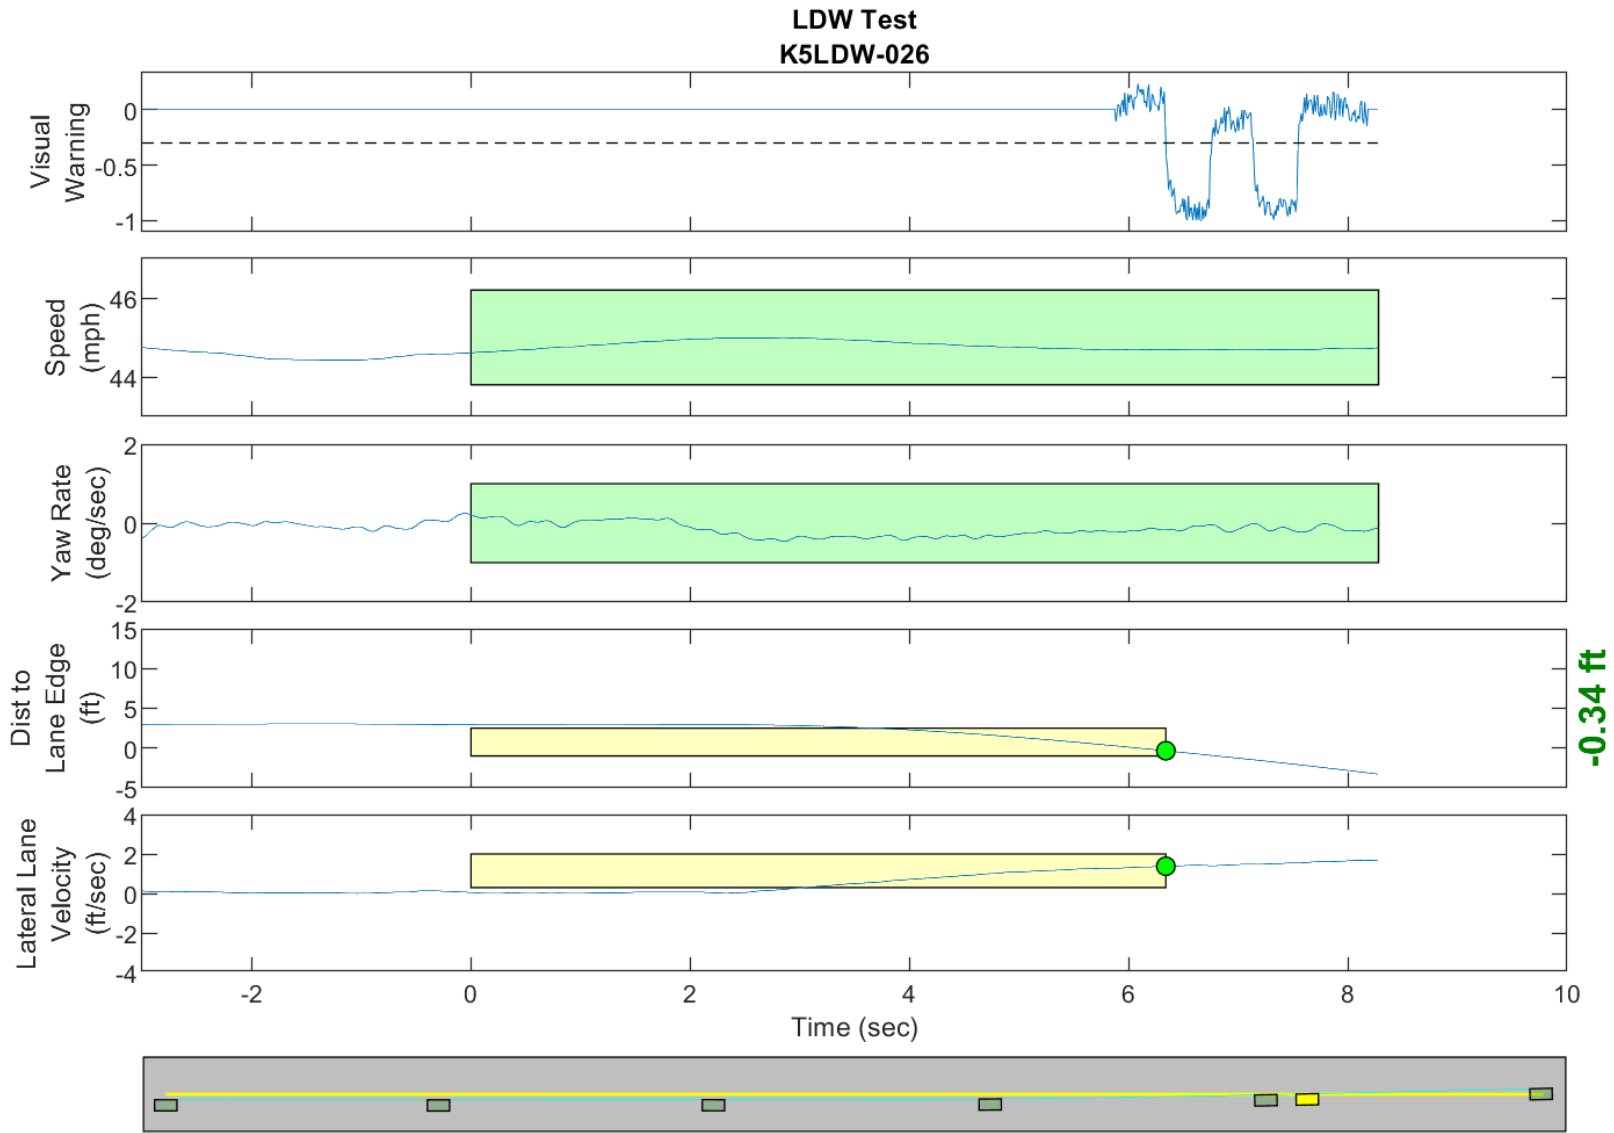


GPS Fix Type: RTK Fixed

Figure D53. Time History for Run 26, Dashed Line, Left Departure, Visual Warning

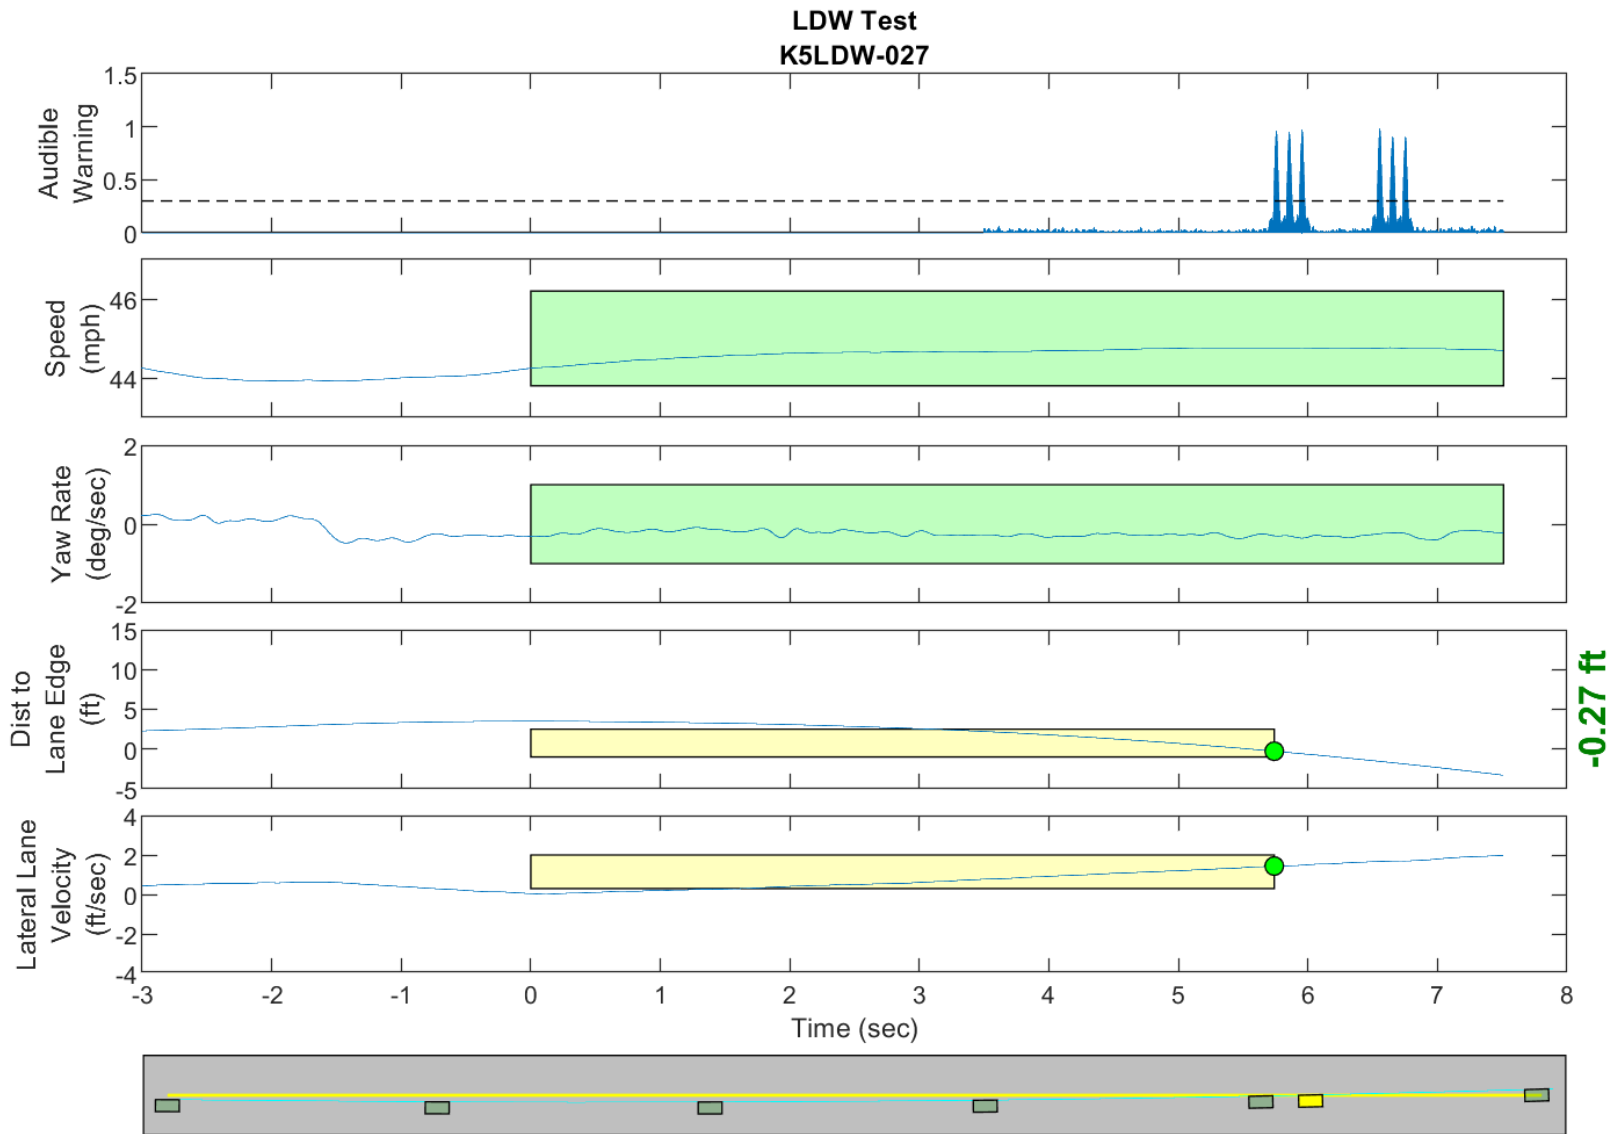


GPS Fix Type: RTK Fixed

Figure D54. Time History for Run 27, Dashed Line, Left Departure, Audible Warning

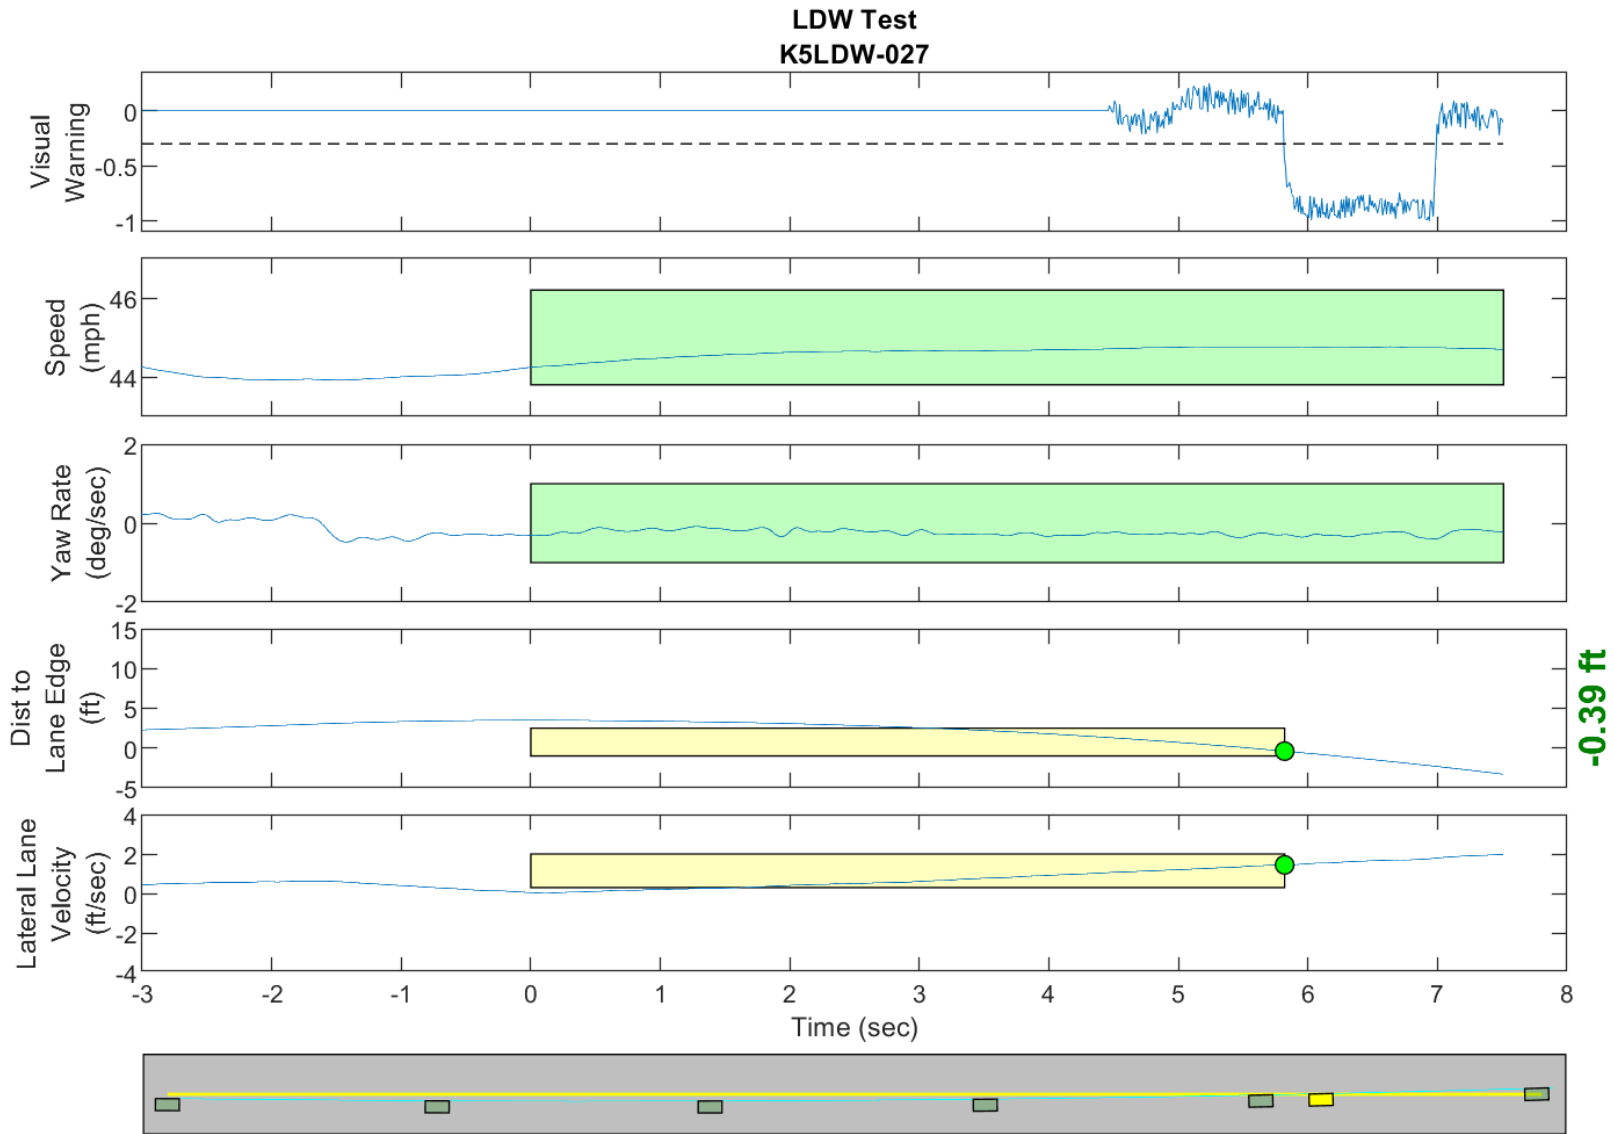


GPS Fix Type: RTK Fixed

Figure D55. Time History for Run 27, Dashed Line, Left Departure, Visual Warning

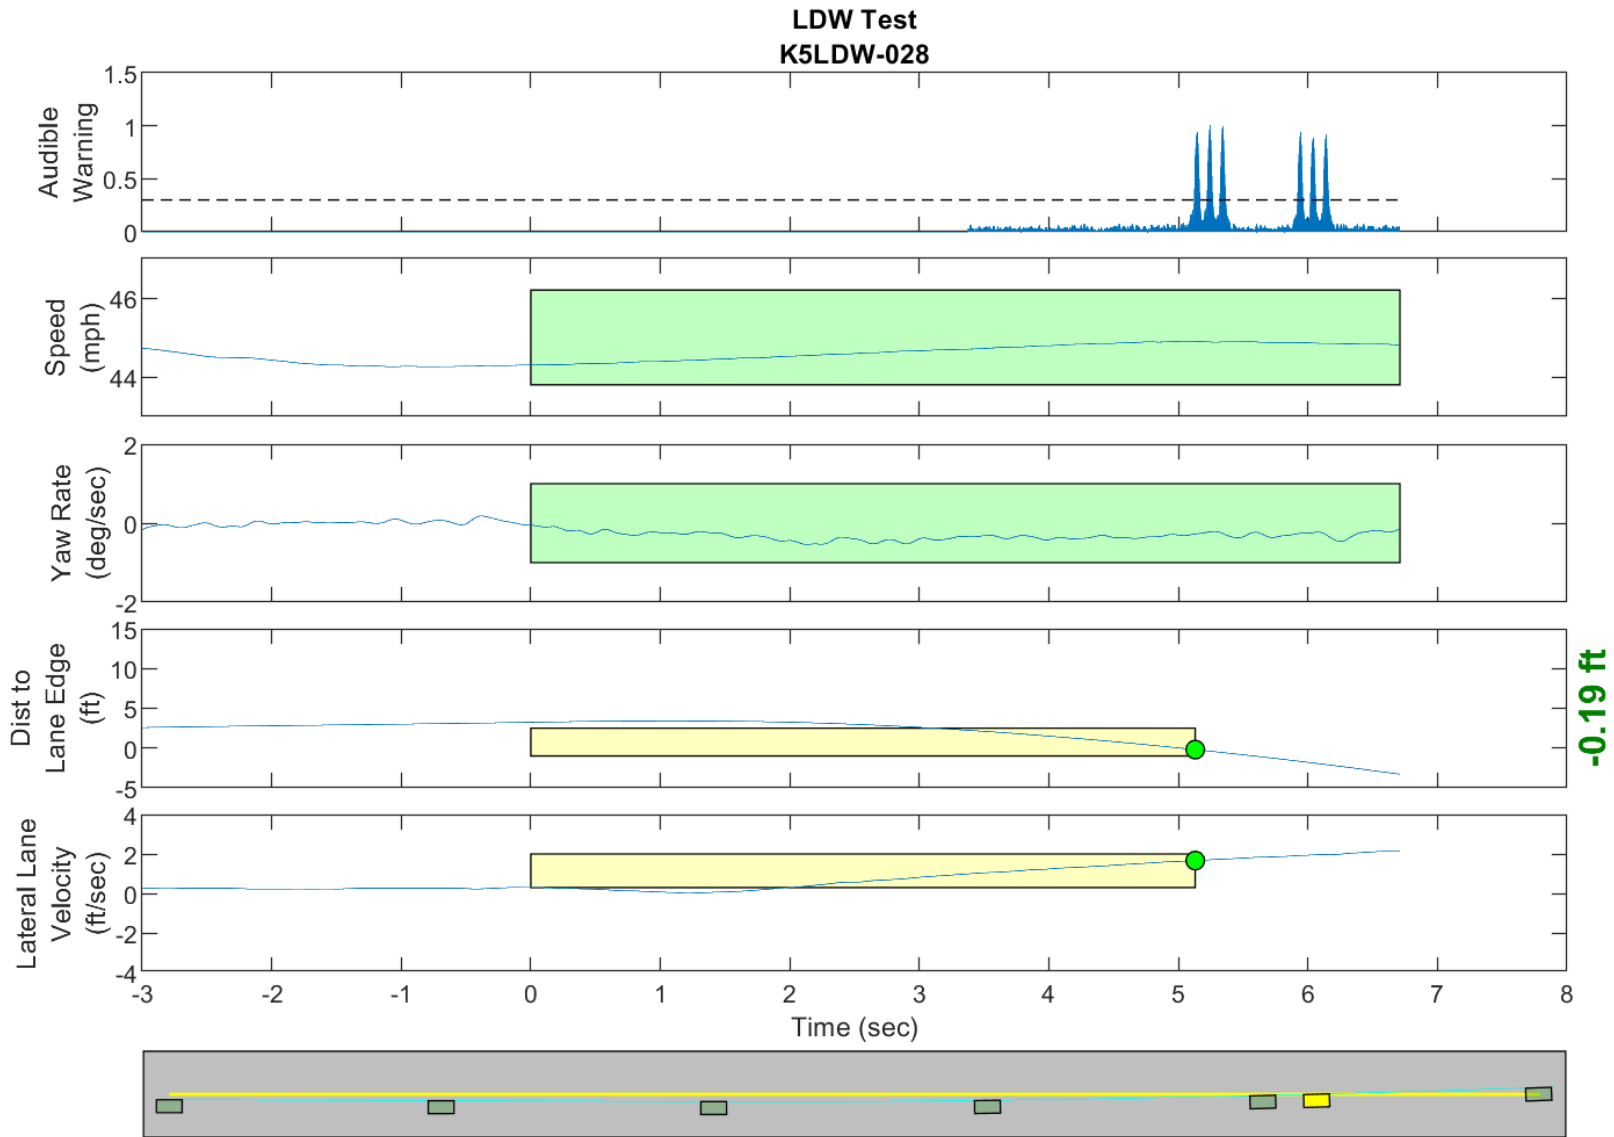


GPS Fix Type: RTK Fixed

Figure D56. Time History for Run 28, Dashed Line, Left Departure, Audible Warning

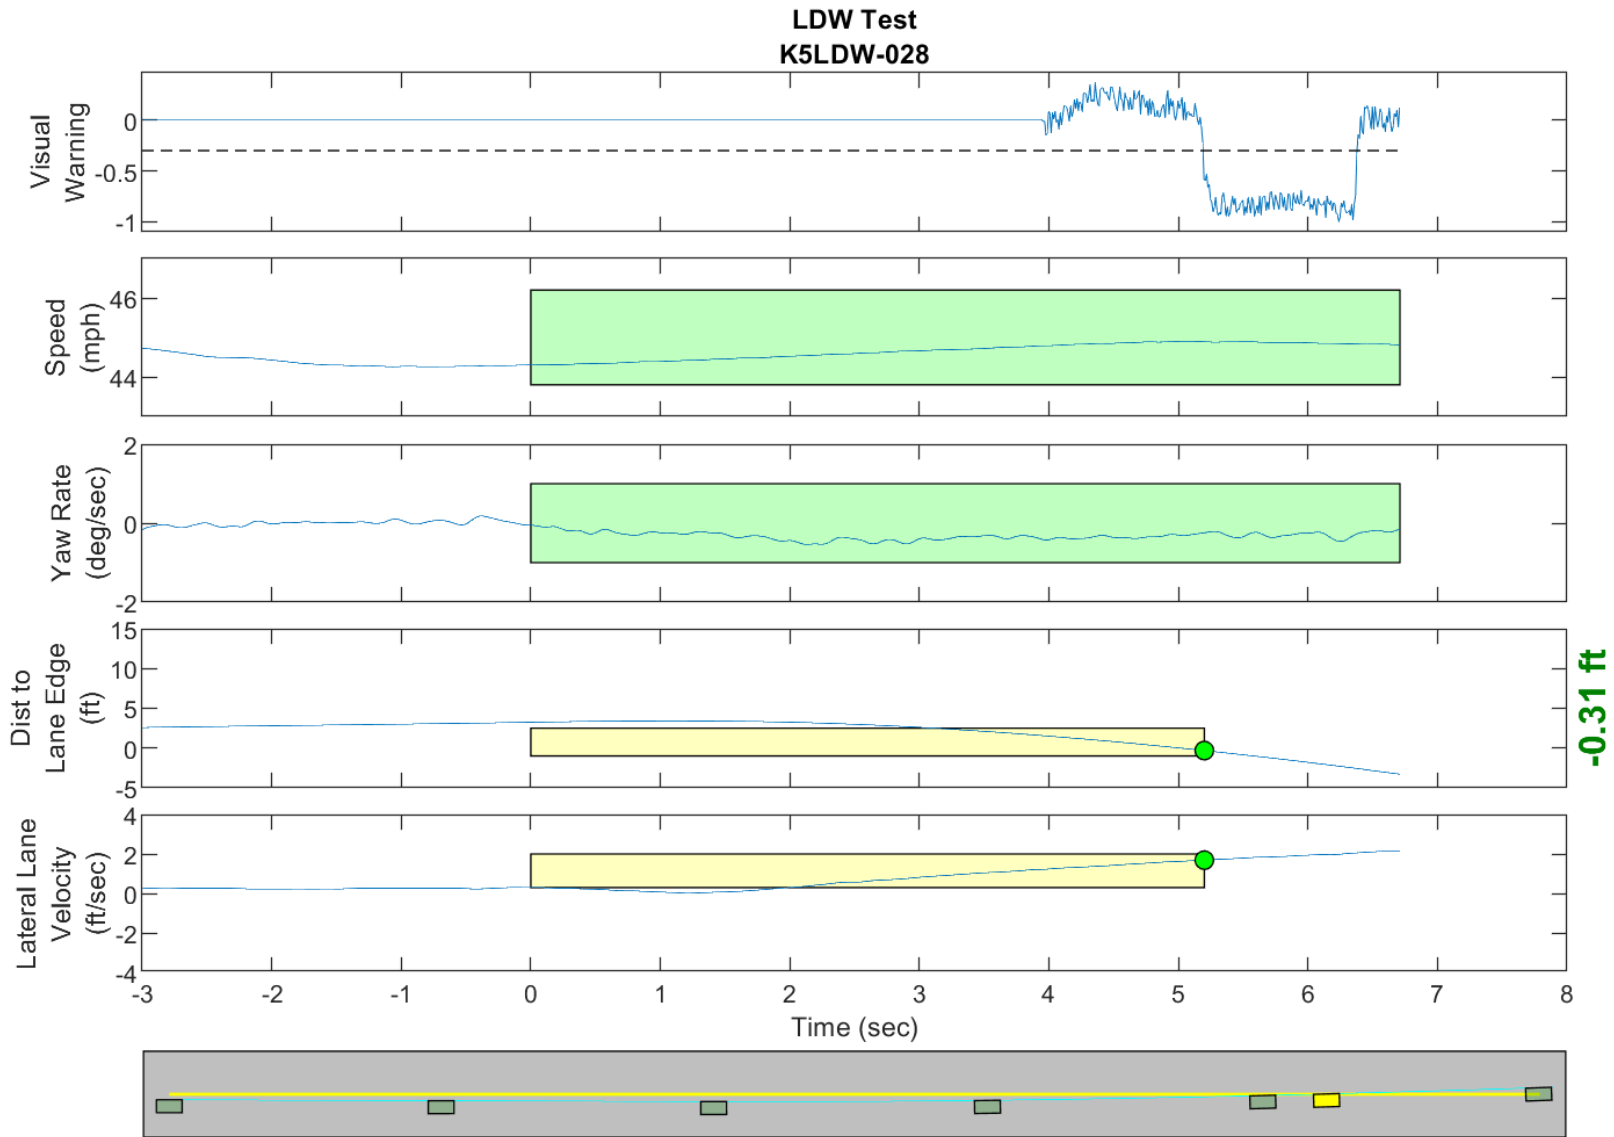


GPS Fix Type: RTK Fixed

Figure D57. Time History for Run 28, Dashed Line, Left Departure, Visual Warning

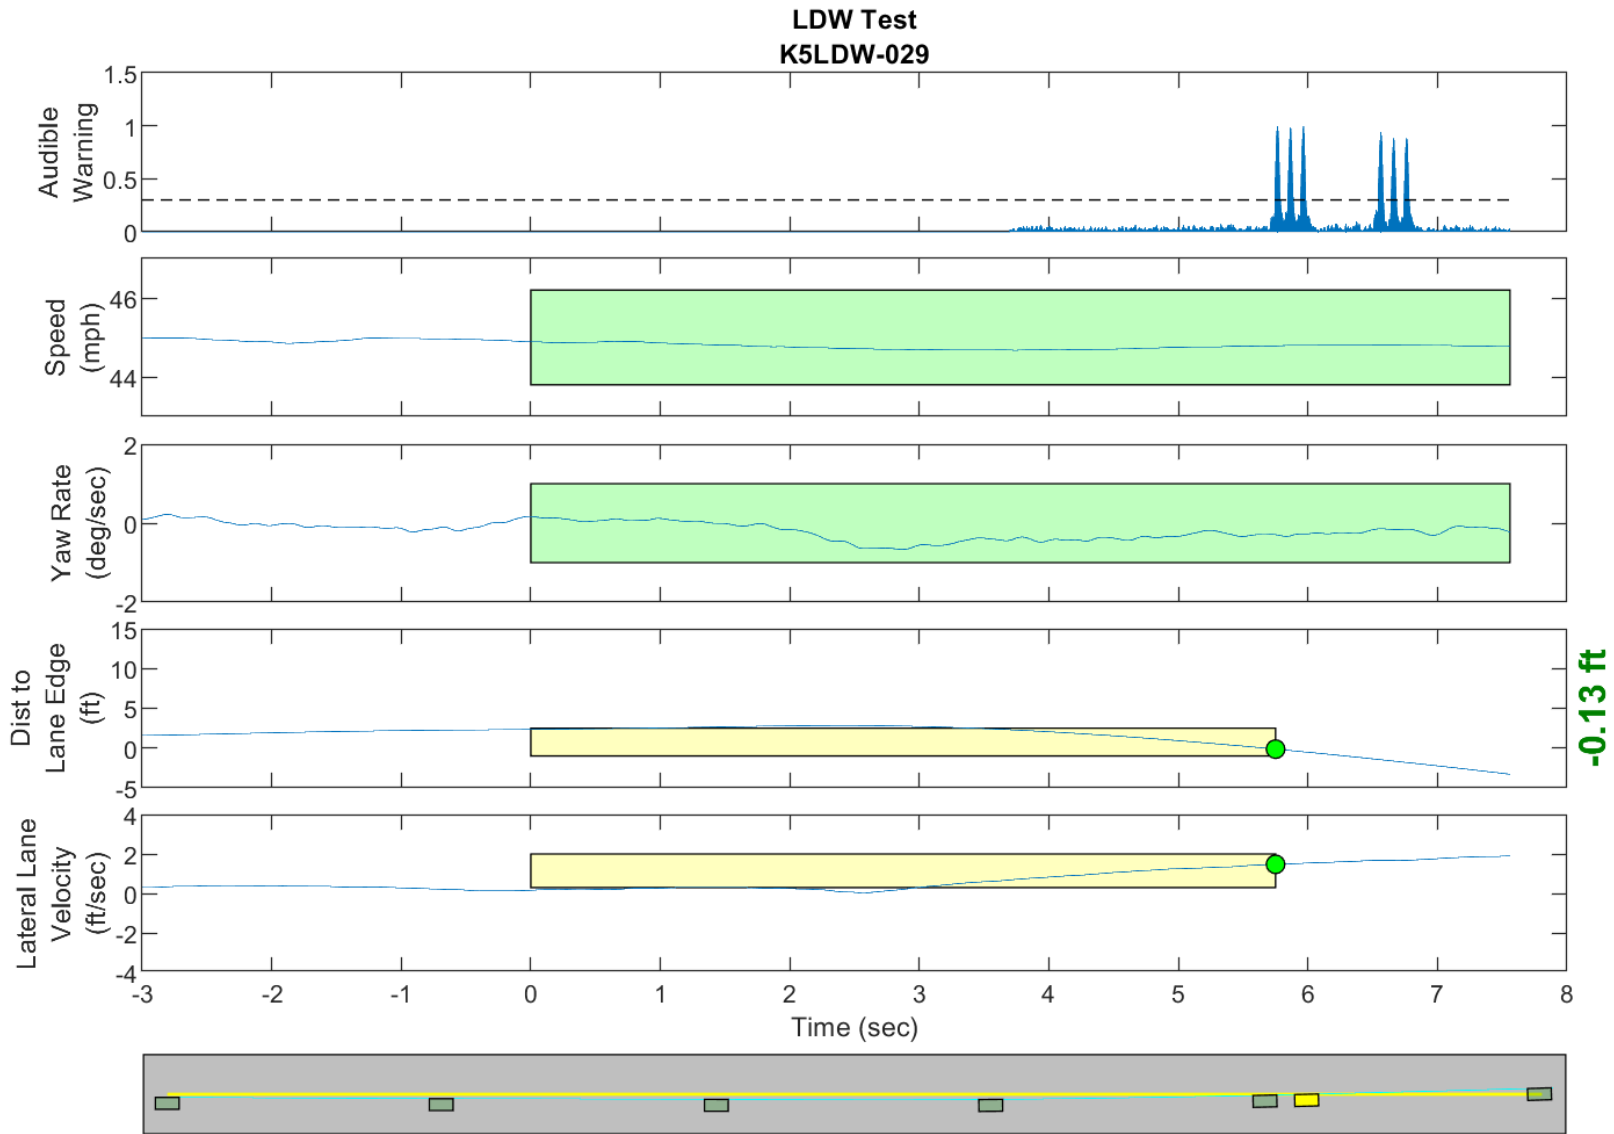


GPS Fix Type: RTK Fixed

Figure D58. Time History for Run 29, Dashed Line, Left Departure, Audible Warning

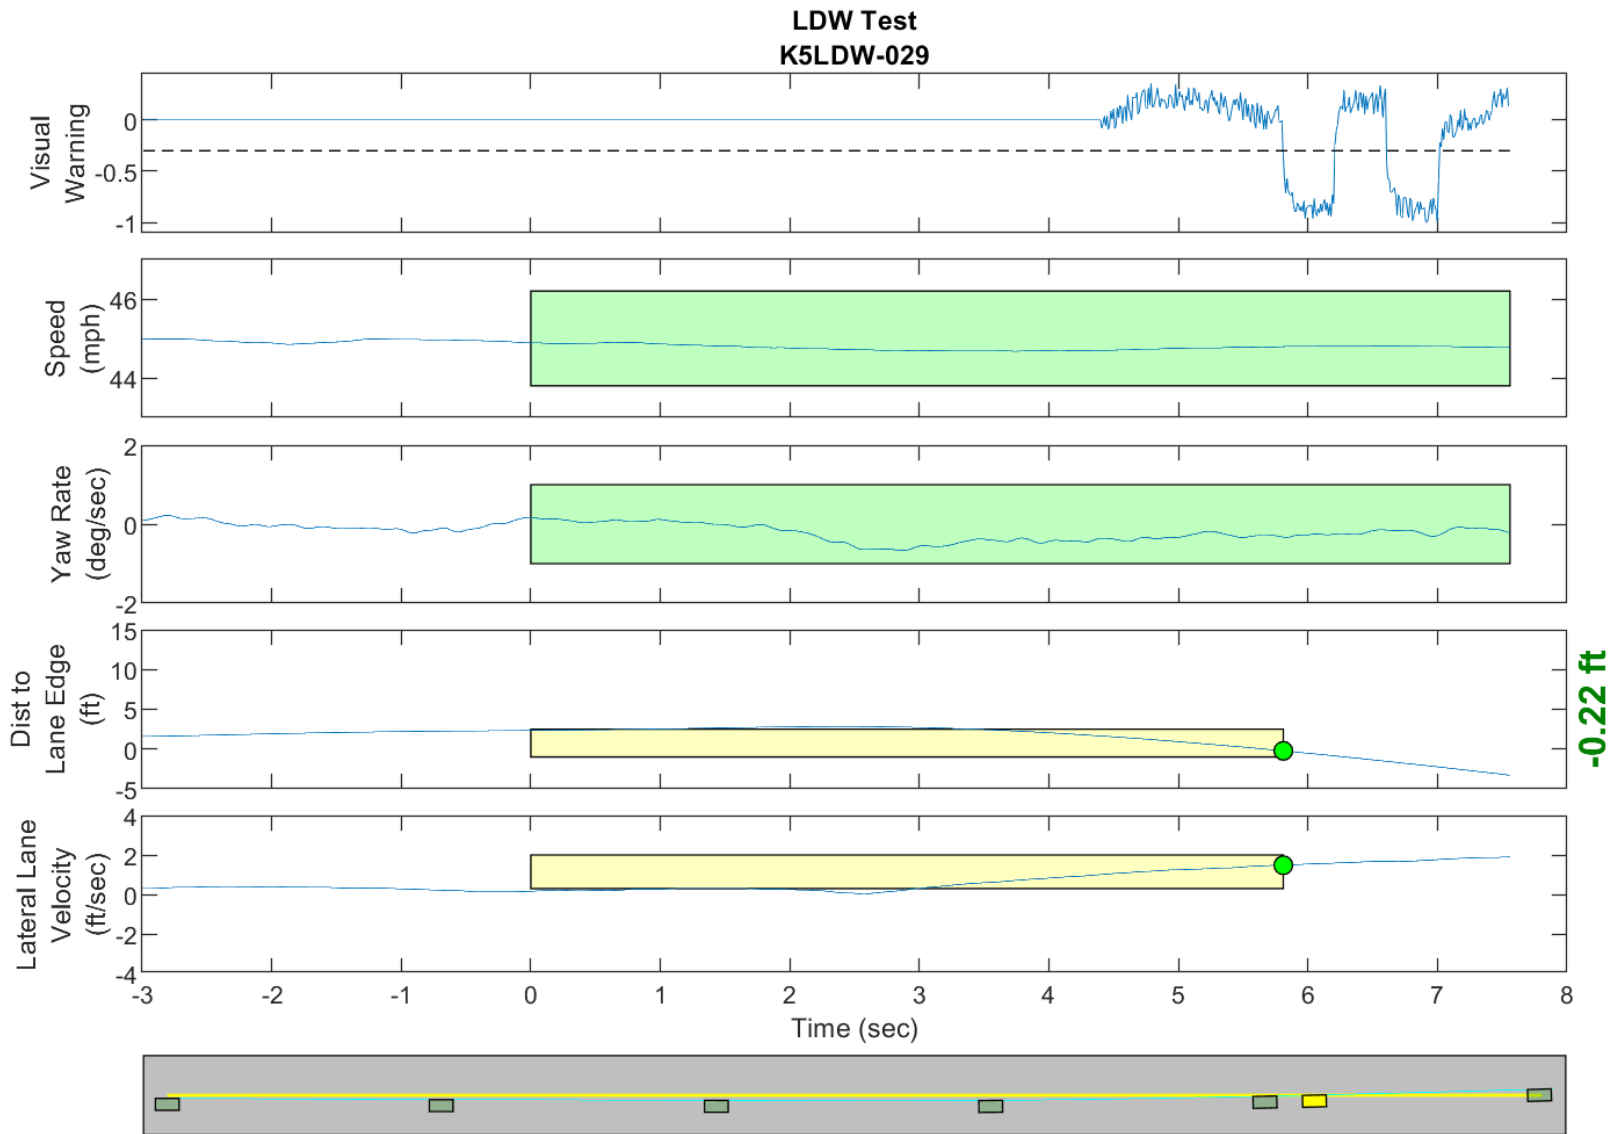


GPS Fix Type: RTK Fixed

Figure D59. Time History for Run 29, Dashed Line, Left Departure, Visual Warning

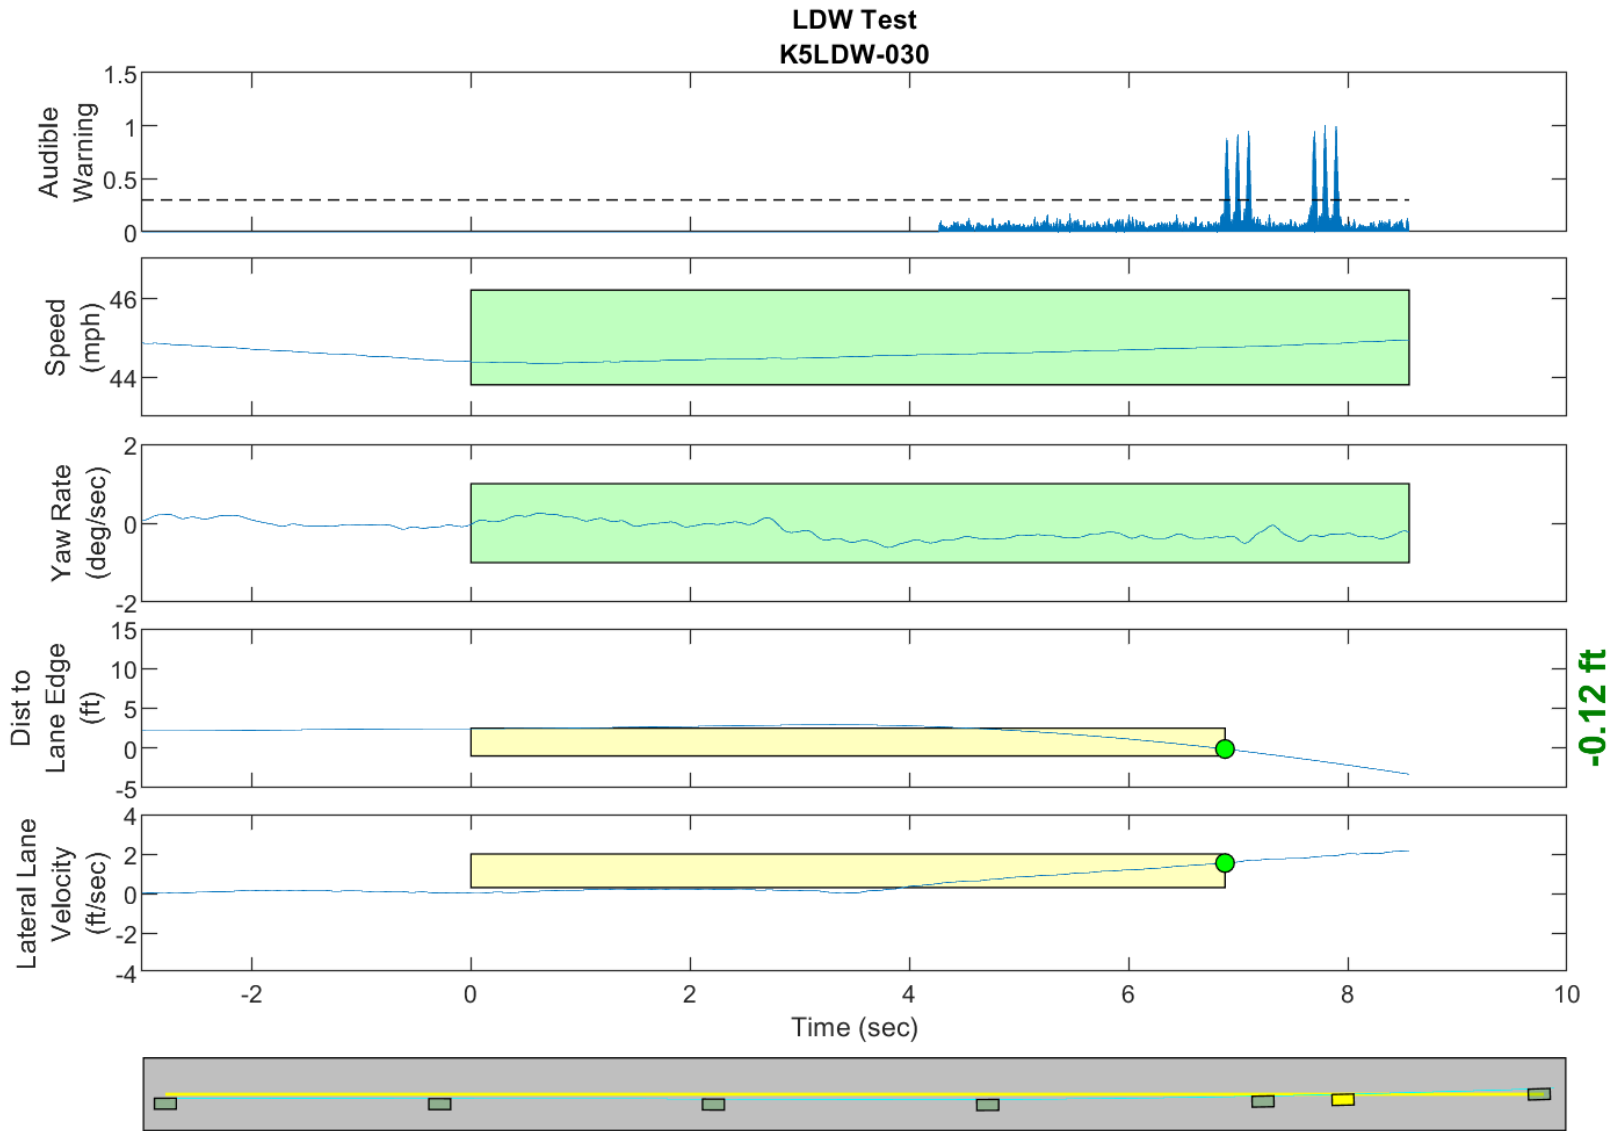


GPS Fix Type: RTK Fixed

Figure D60. Time History for Run 30, Botts Dots, Left Departure, Audible Warning

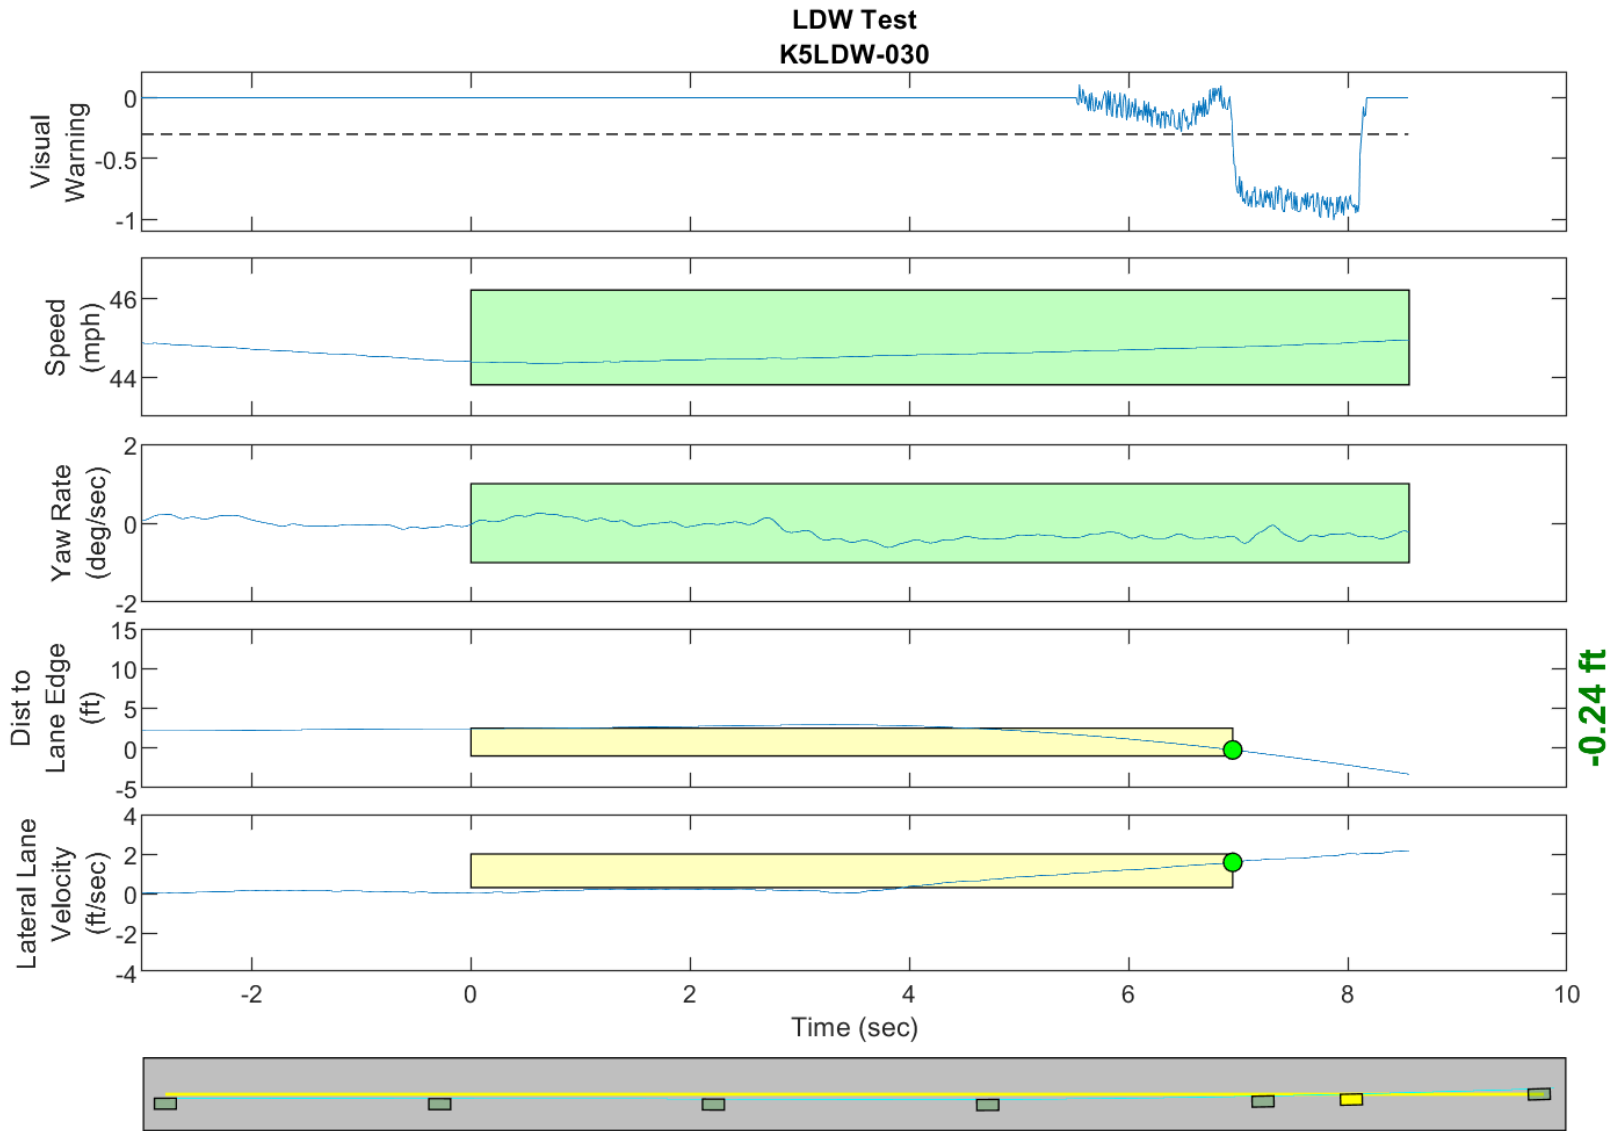


GPS Fix Type: RTK Fixed

Figure D61. Time History for Run 30, Botts Dots, Left Departure, Visual Warning

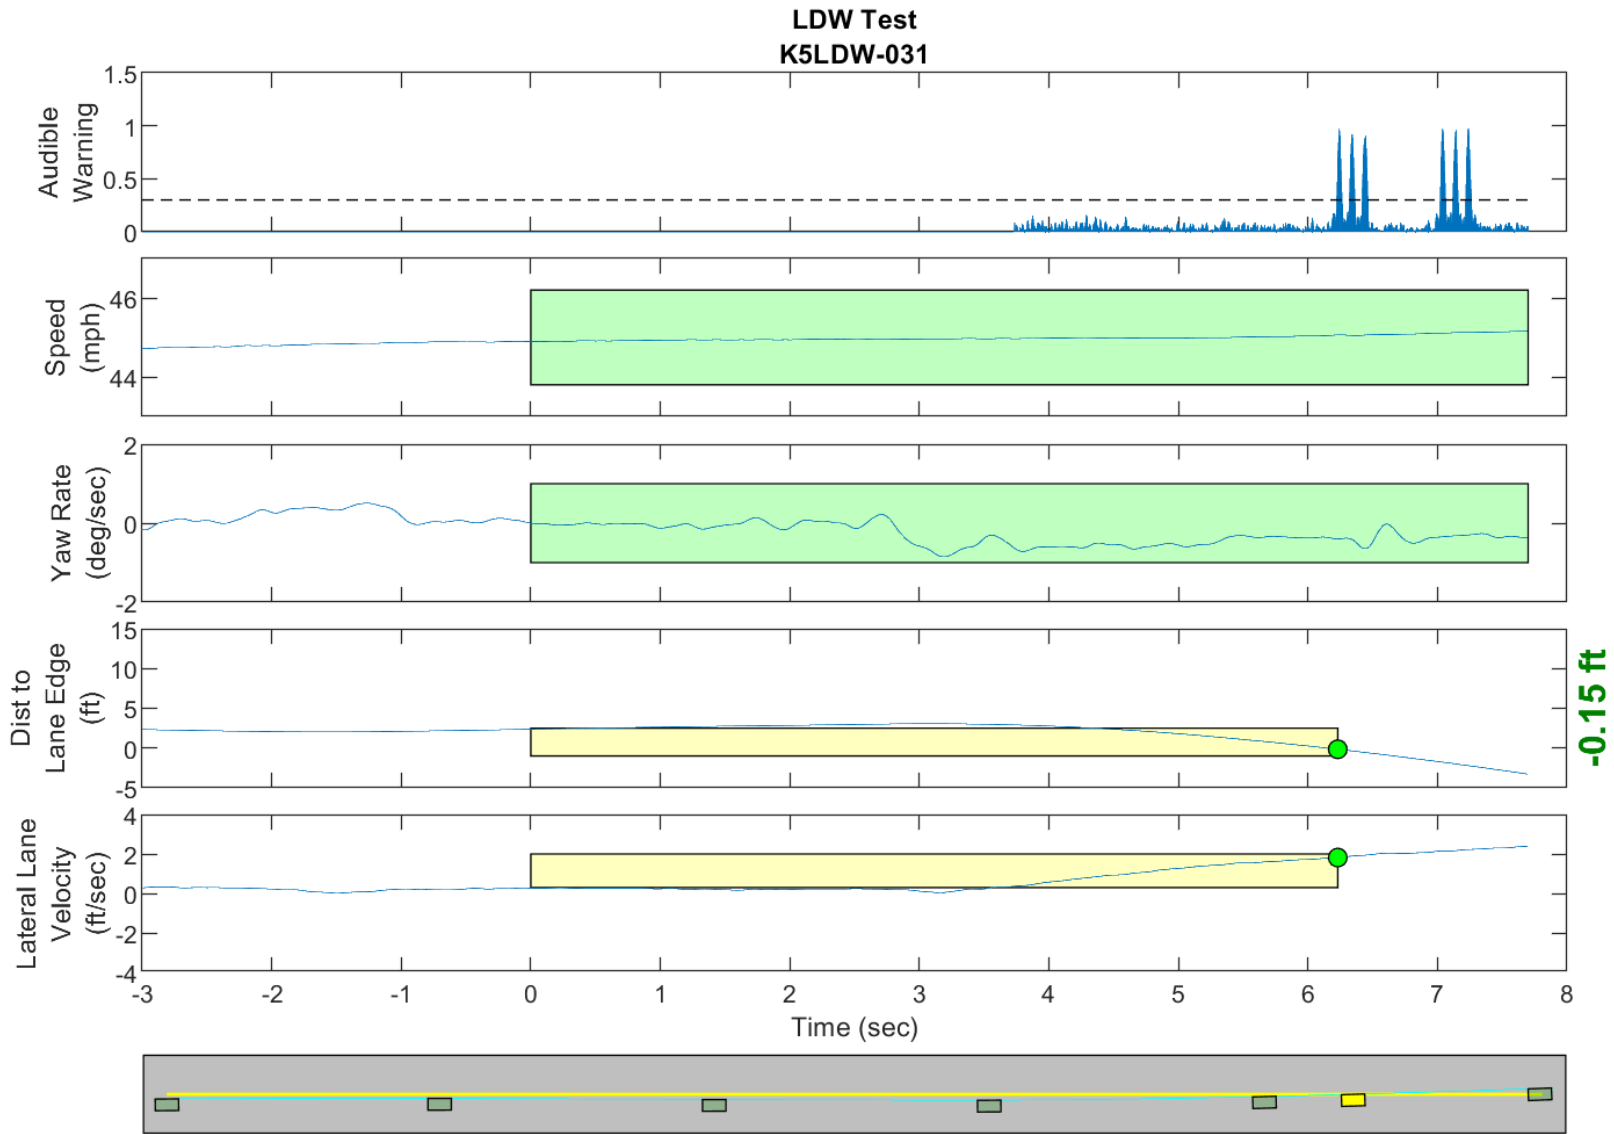


GPS Fix Type: RTK Fixed

Figure D62. Time History for Run 31, Botts Dots, Left Departure, Audible Warning

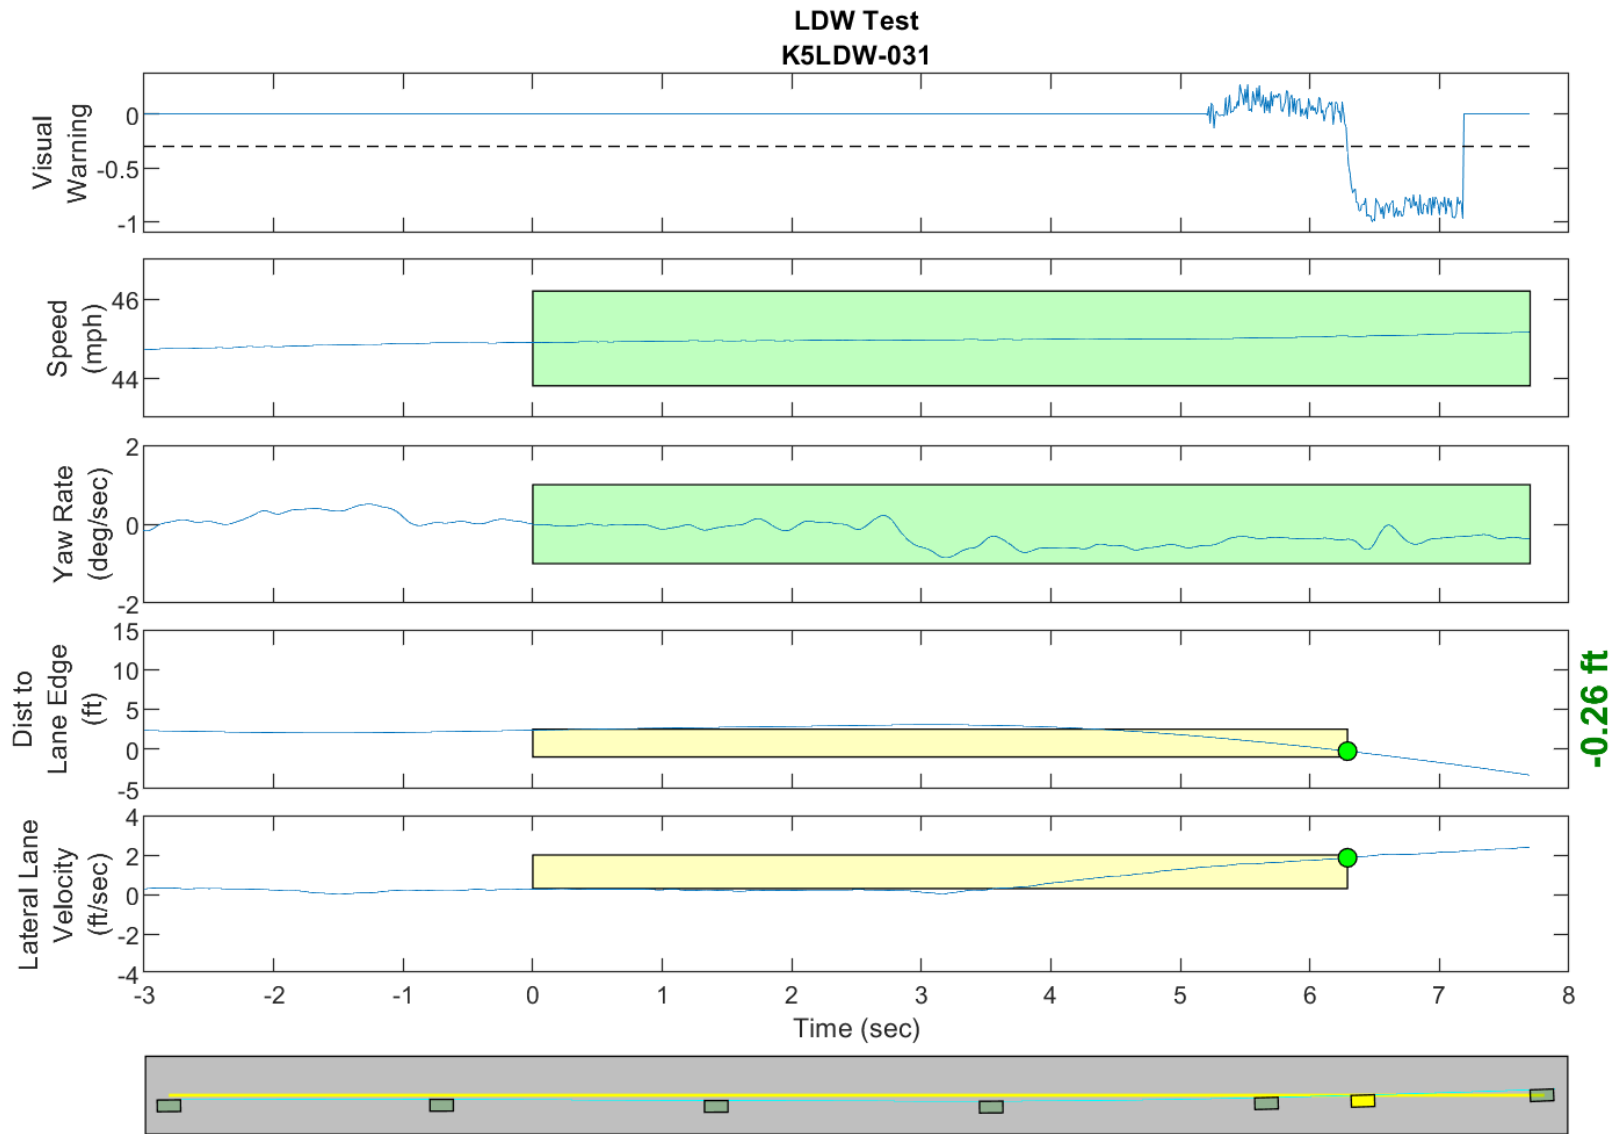


GPS Fix Type: RTK Fixed

Figure D63. Time History for Run 31, Botts Dots, Left Departure, Visual Warning

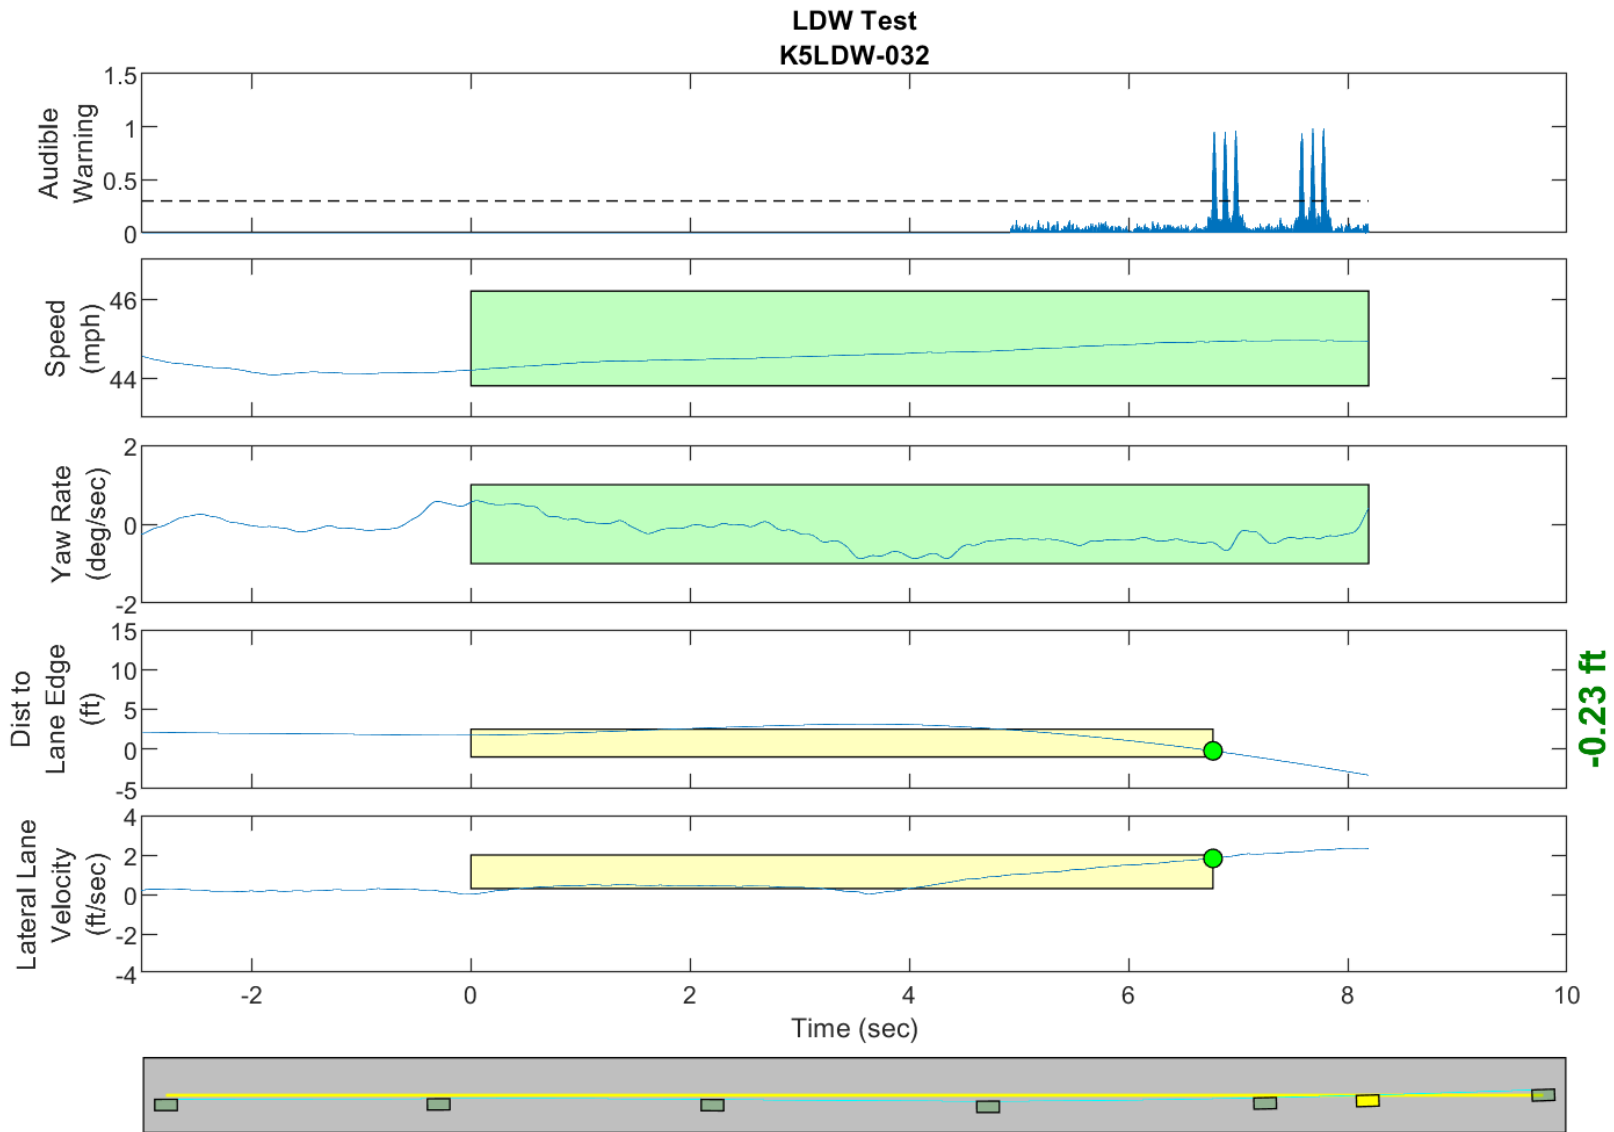


GPS Fix Type: RTK Fixed

Figure D64. Time History for Run 32, Botts Dots, Left Departure, Audible Warning

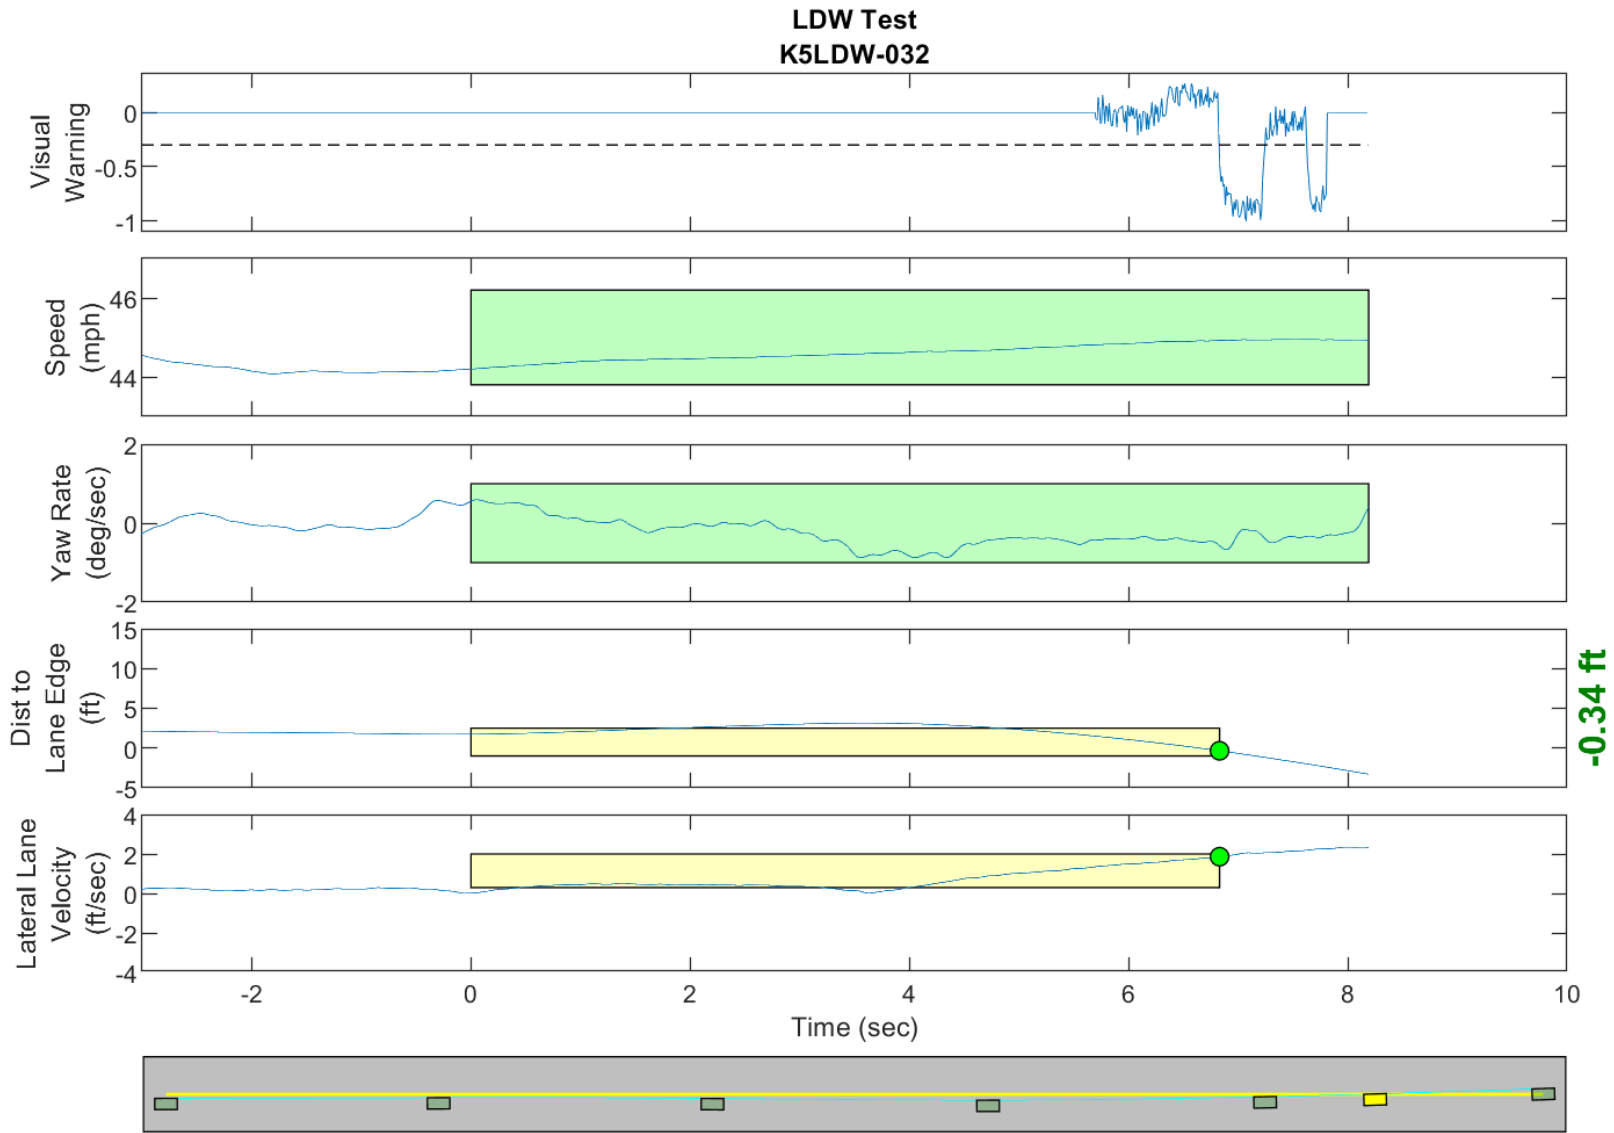


GPS Fix Type: RTK Fixed

Figure D65. Time History for Run 32, Botts Dots, Left Departure, Visual Warning

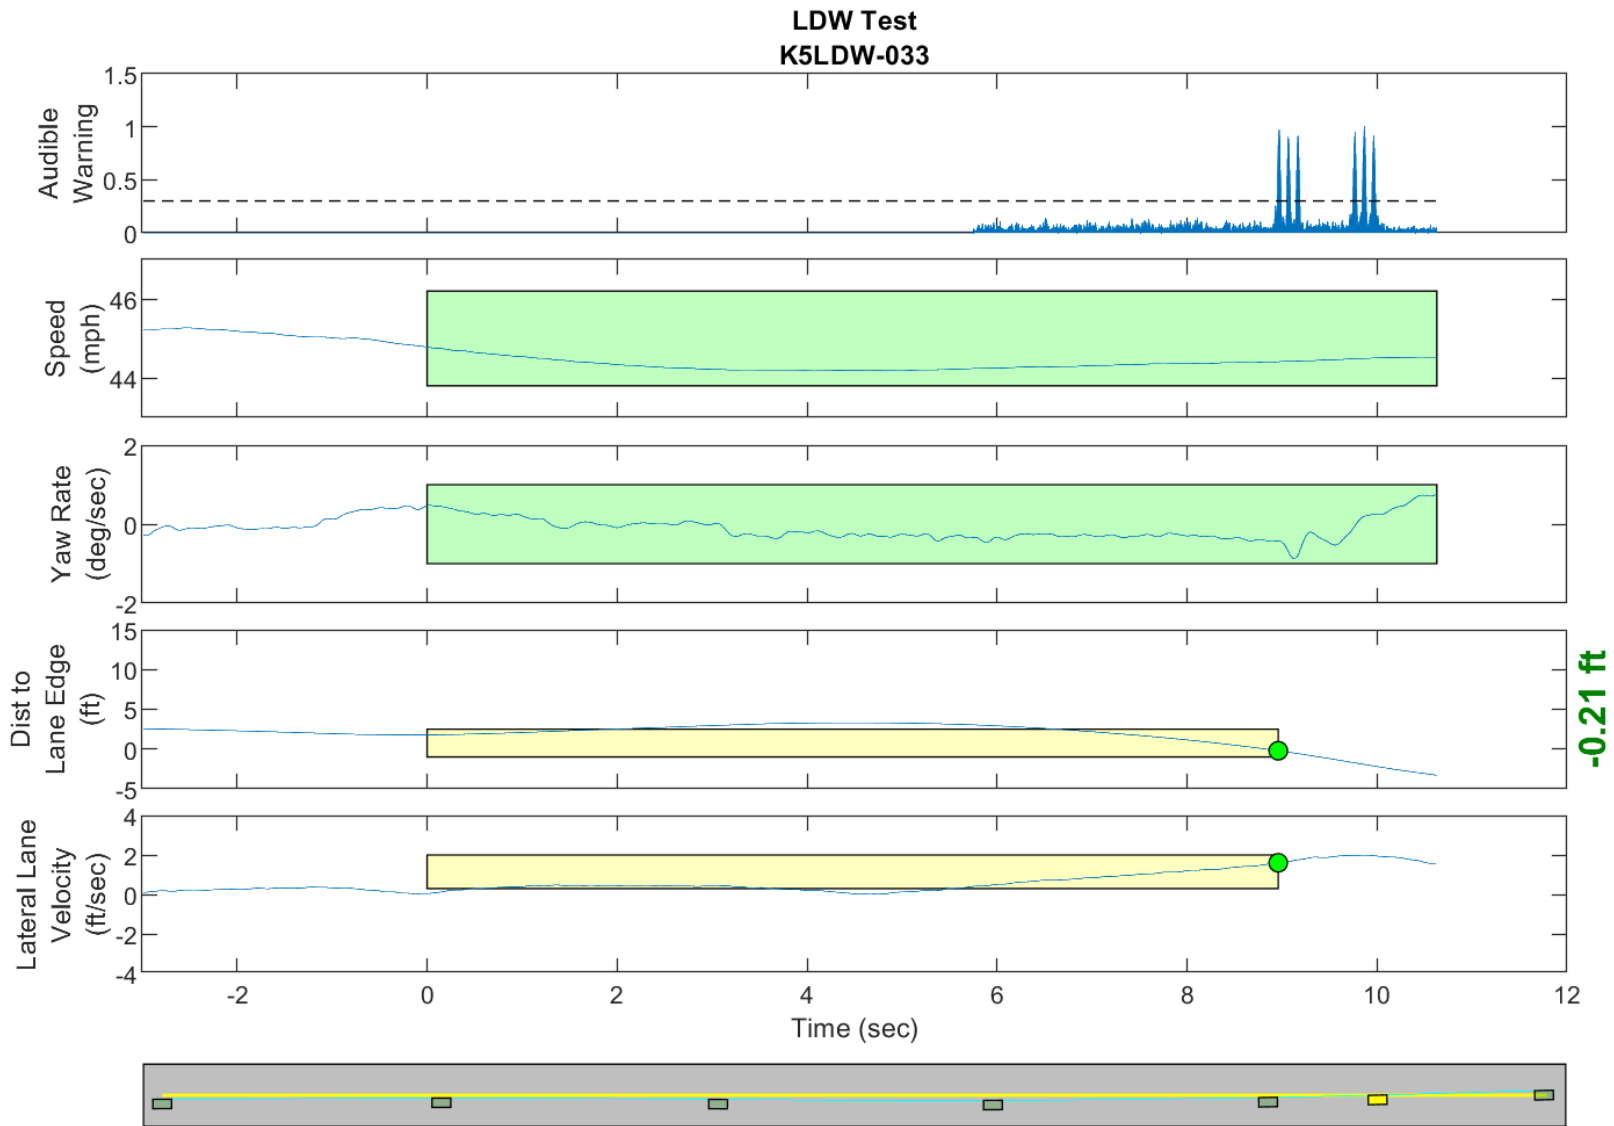


GPS Fix Type: RTK Fixed

Figure D66. Time History for Run 33, Botts Dots, Left Departure, Audible Warning

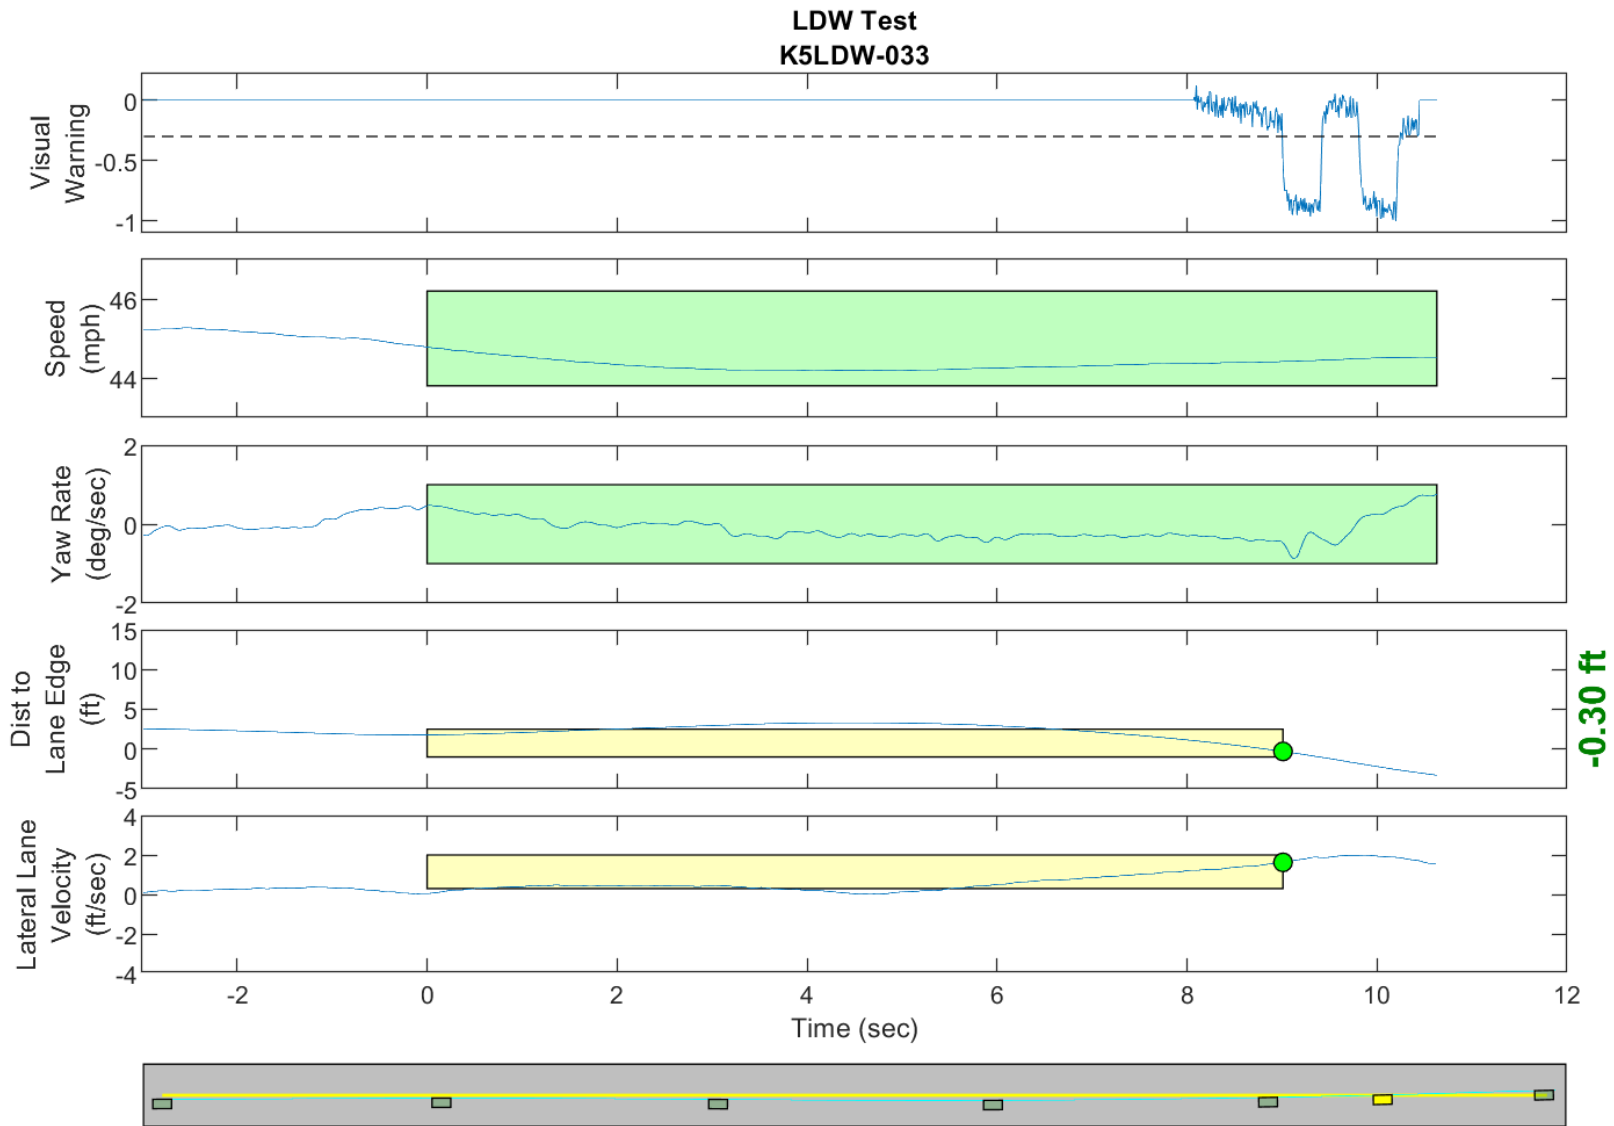


GPS Fix Type: RTK Fixed

Figure D67. Time History for Run 33, Botts Dots, Left Departure, Visual Warning

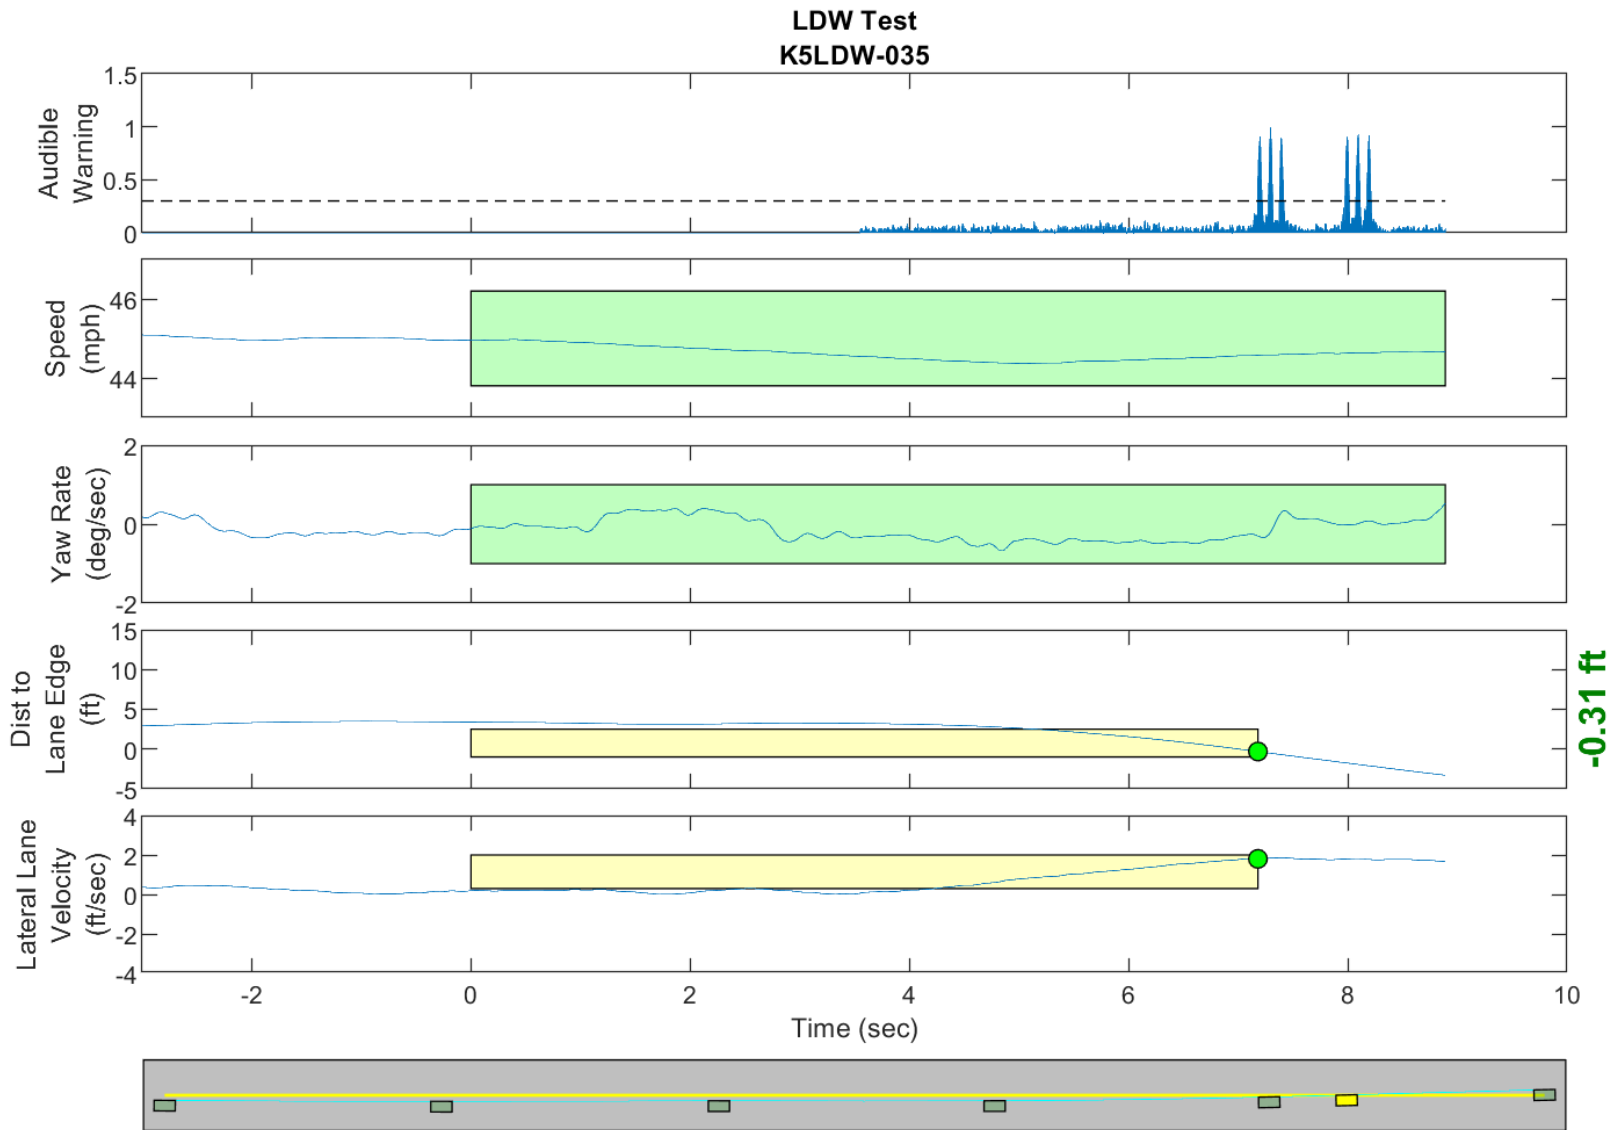


GPS Fix Type: RTK Fixed

Figure D68. Time History for Run 35, Botts Dots, Left Departure, Audible Warning

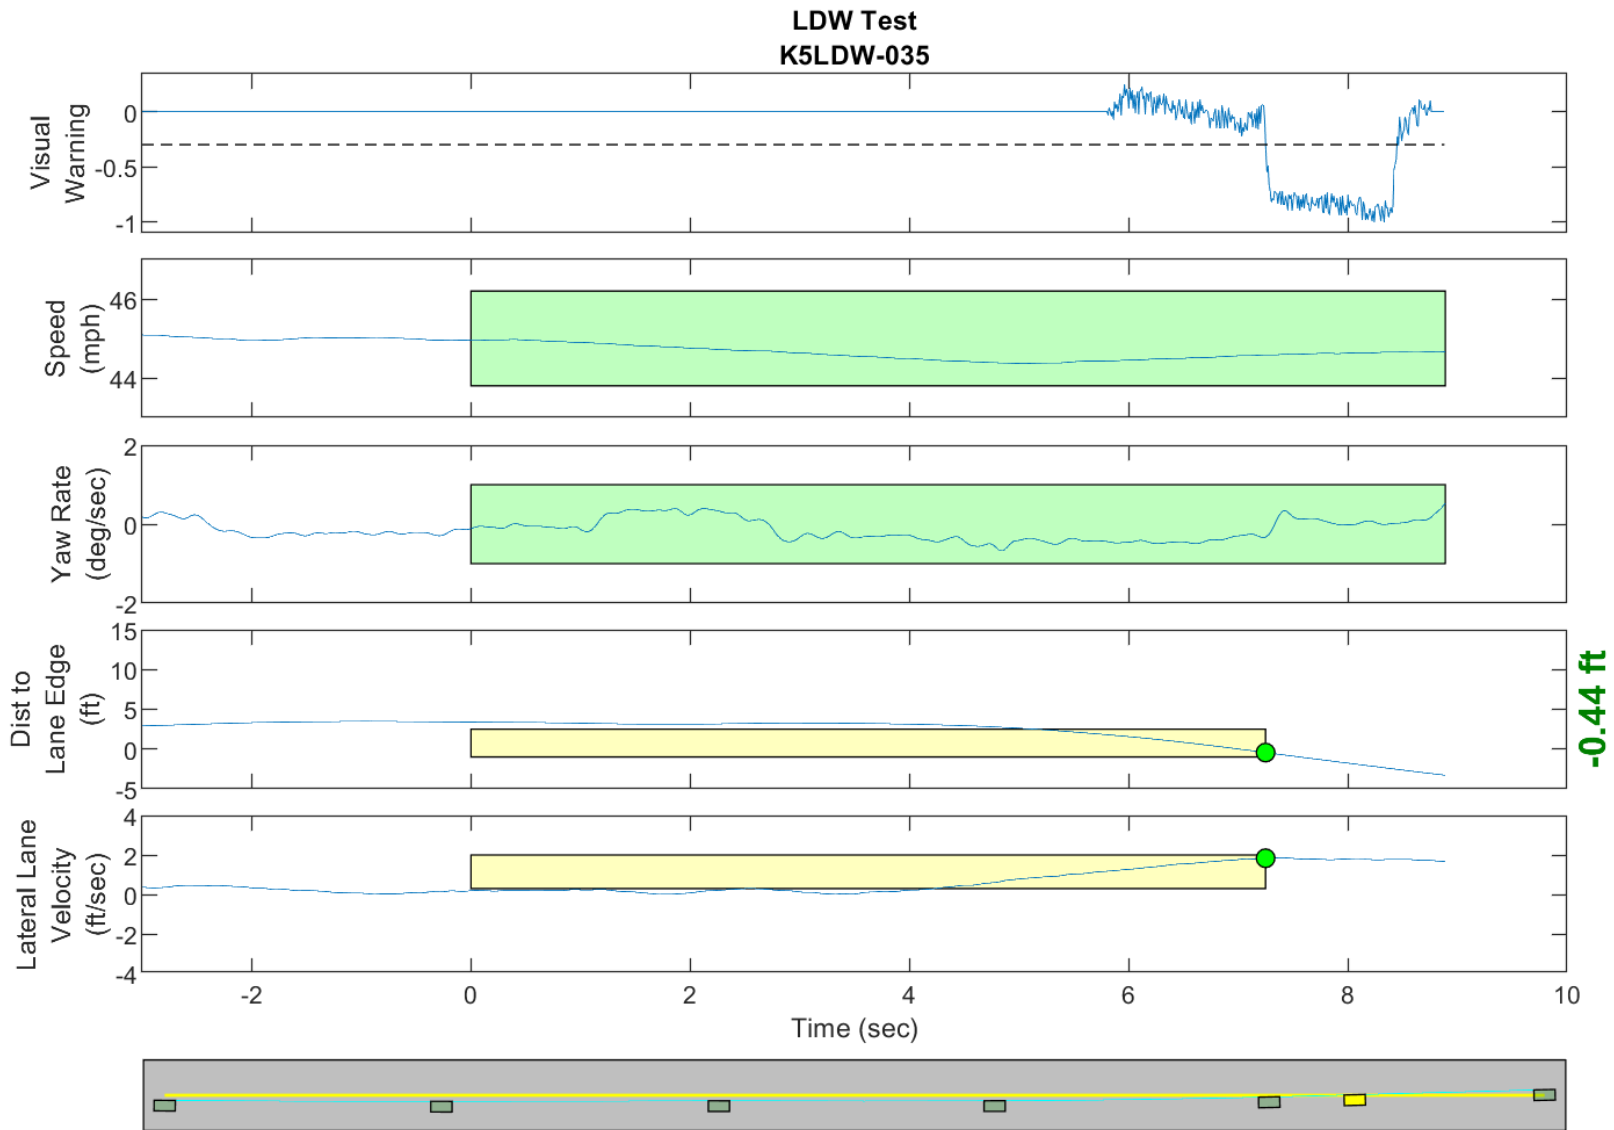


GPS Fix Type: RTK Fixed

Figure D69. Time History for Run 35, Botts Dots, Left Departure, Visual Warning

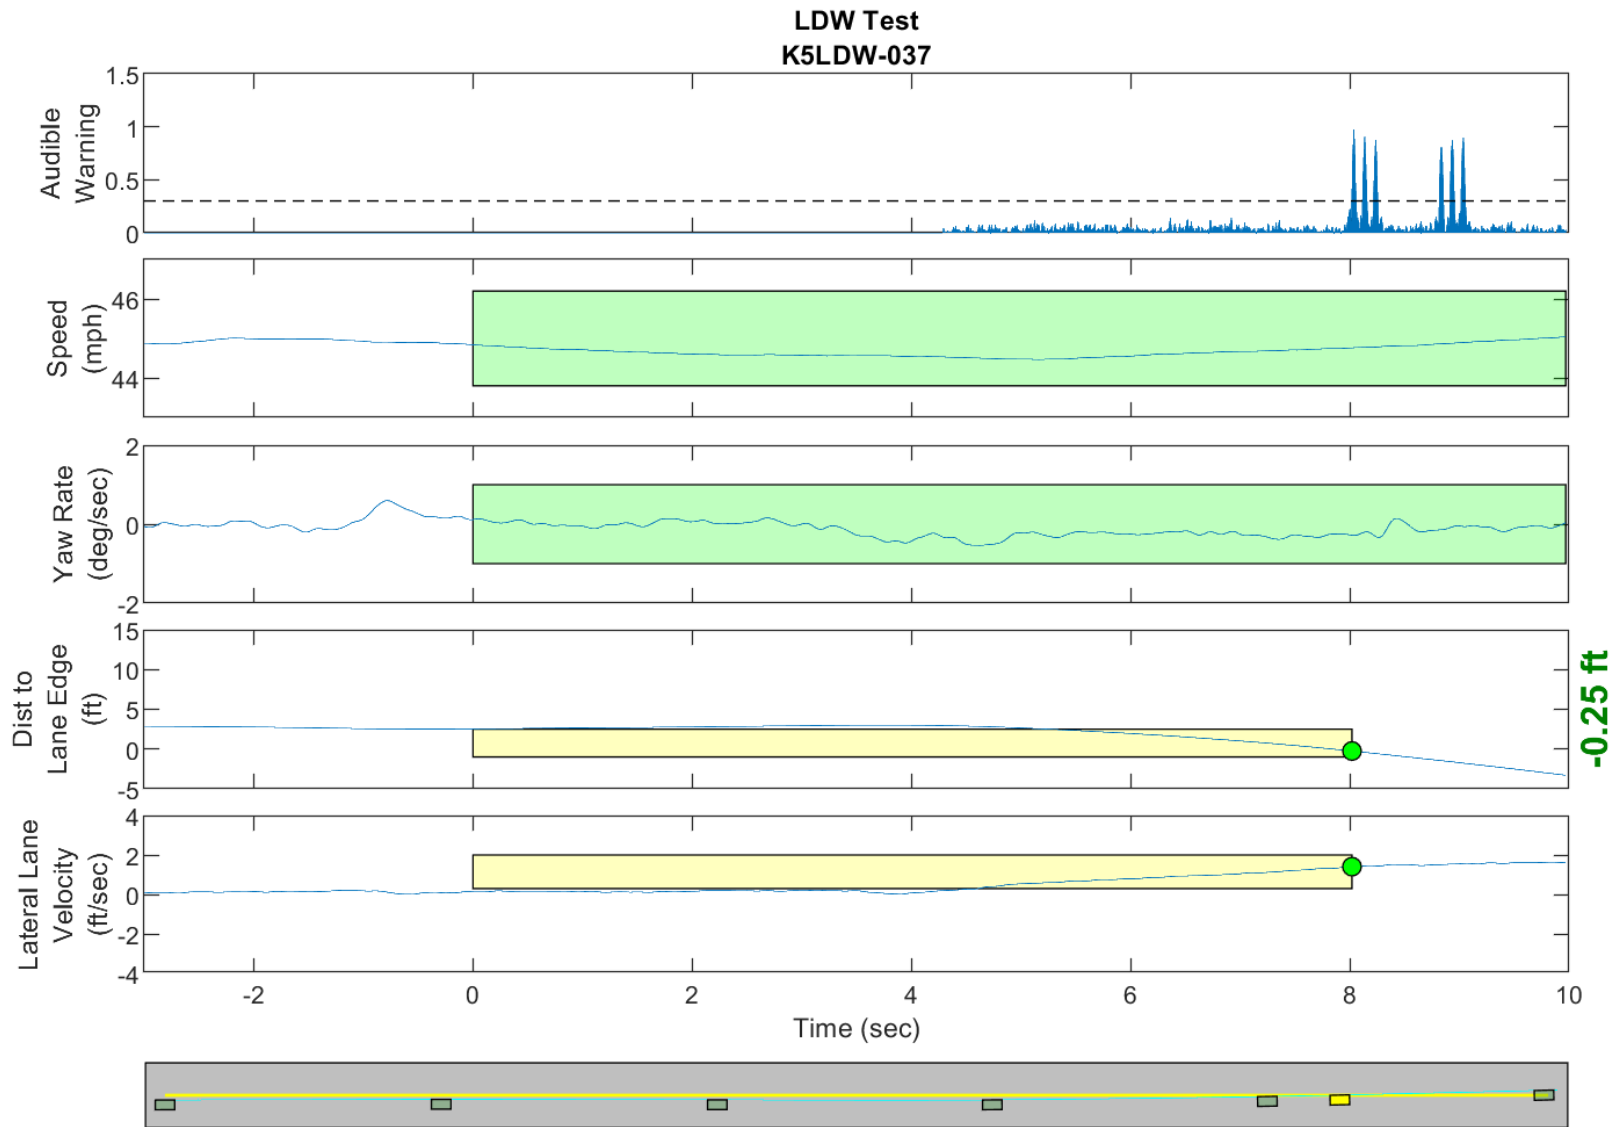


GPS Fix Type: RTK Fixed

Figure D70. Time History for Run 37, Botts Dots, Left Departure, Audible Warning

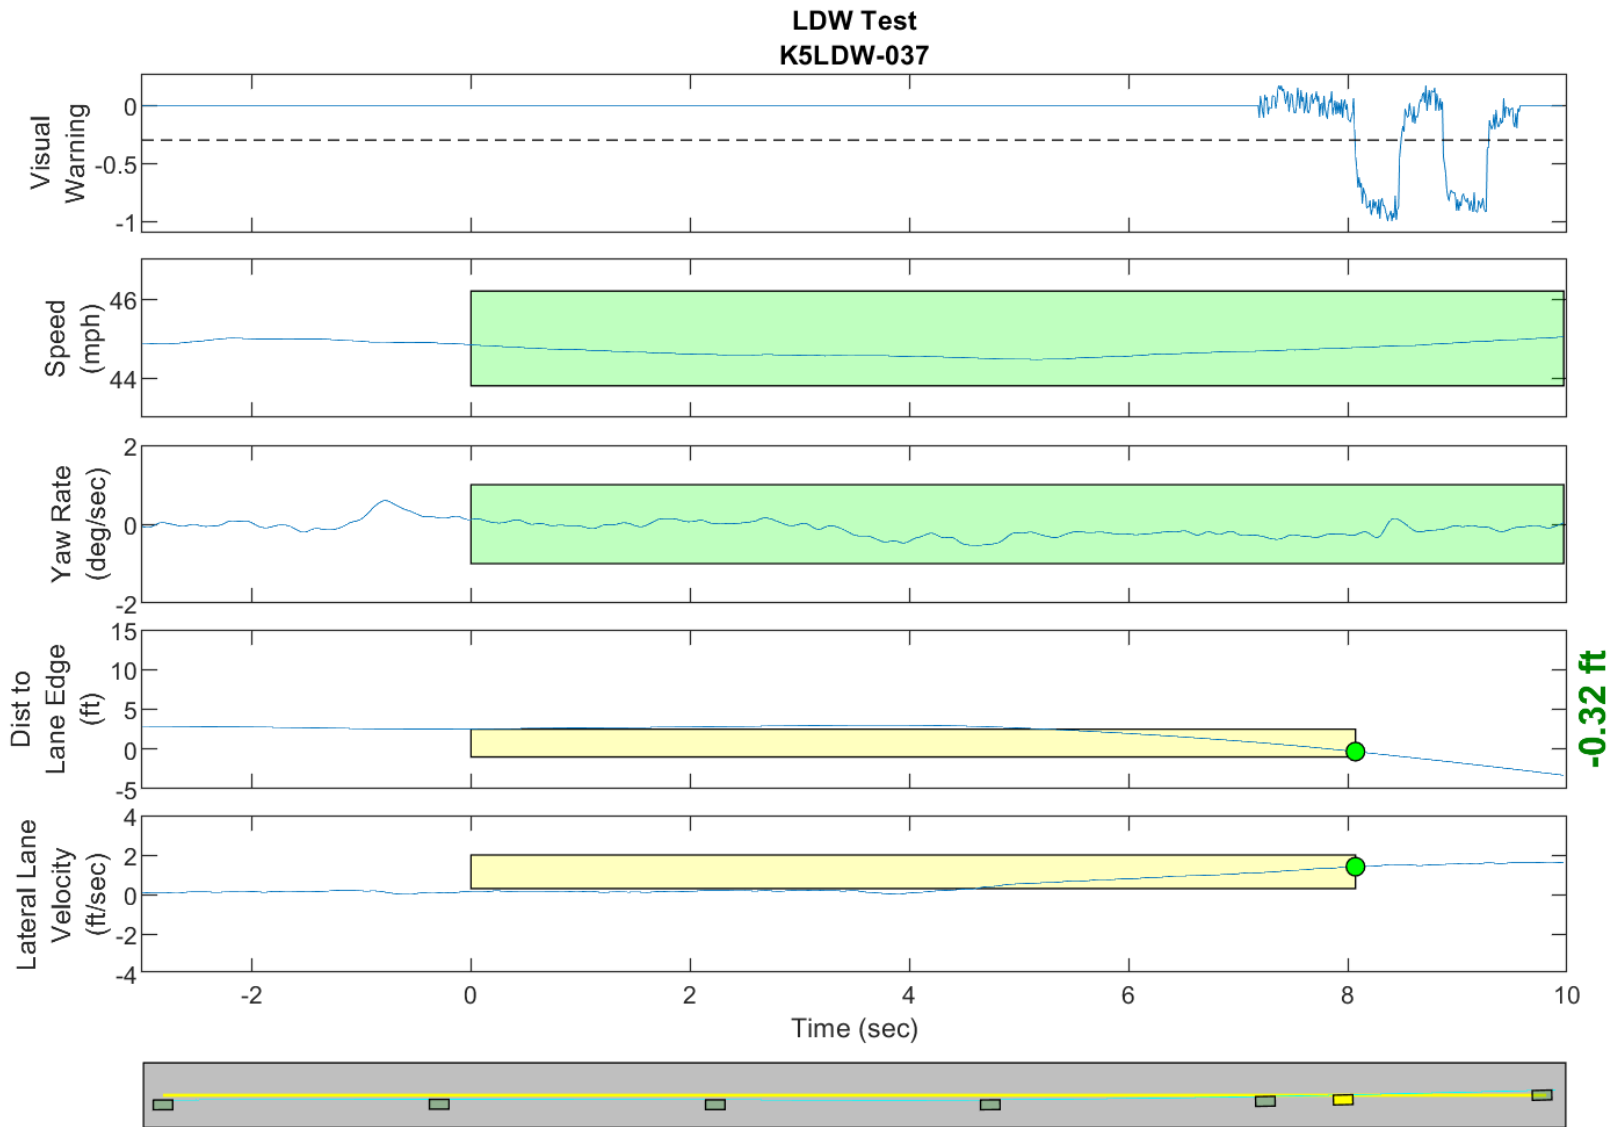


GPS Fix Type: RTK Fixed

Figure D71. Time History for Run 37, Botts Dots, Left Departure, Visual Warning

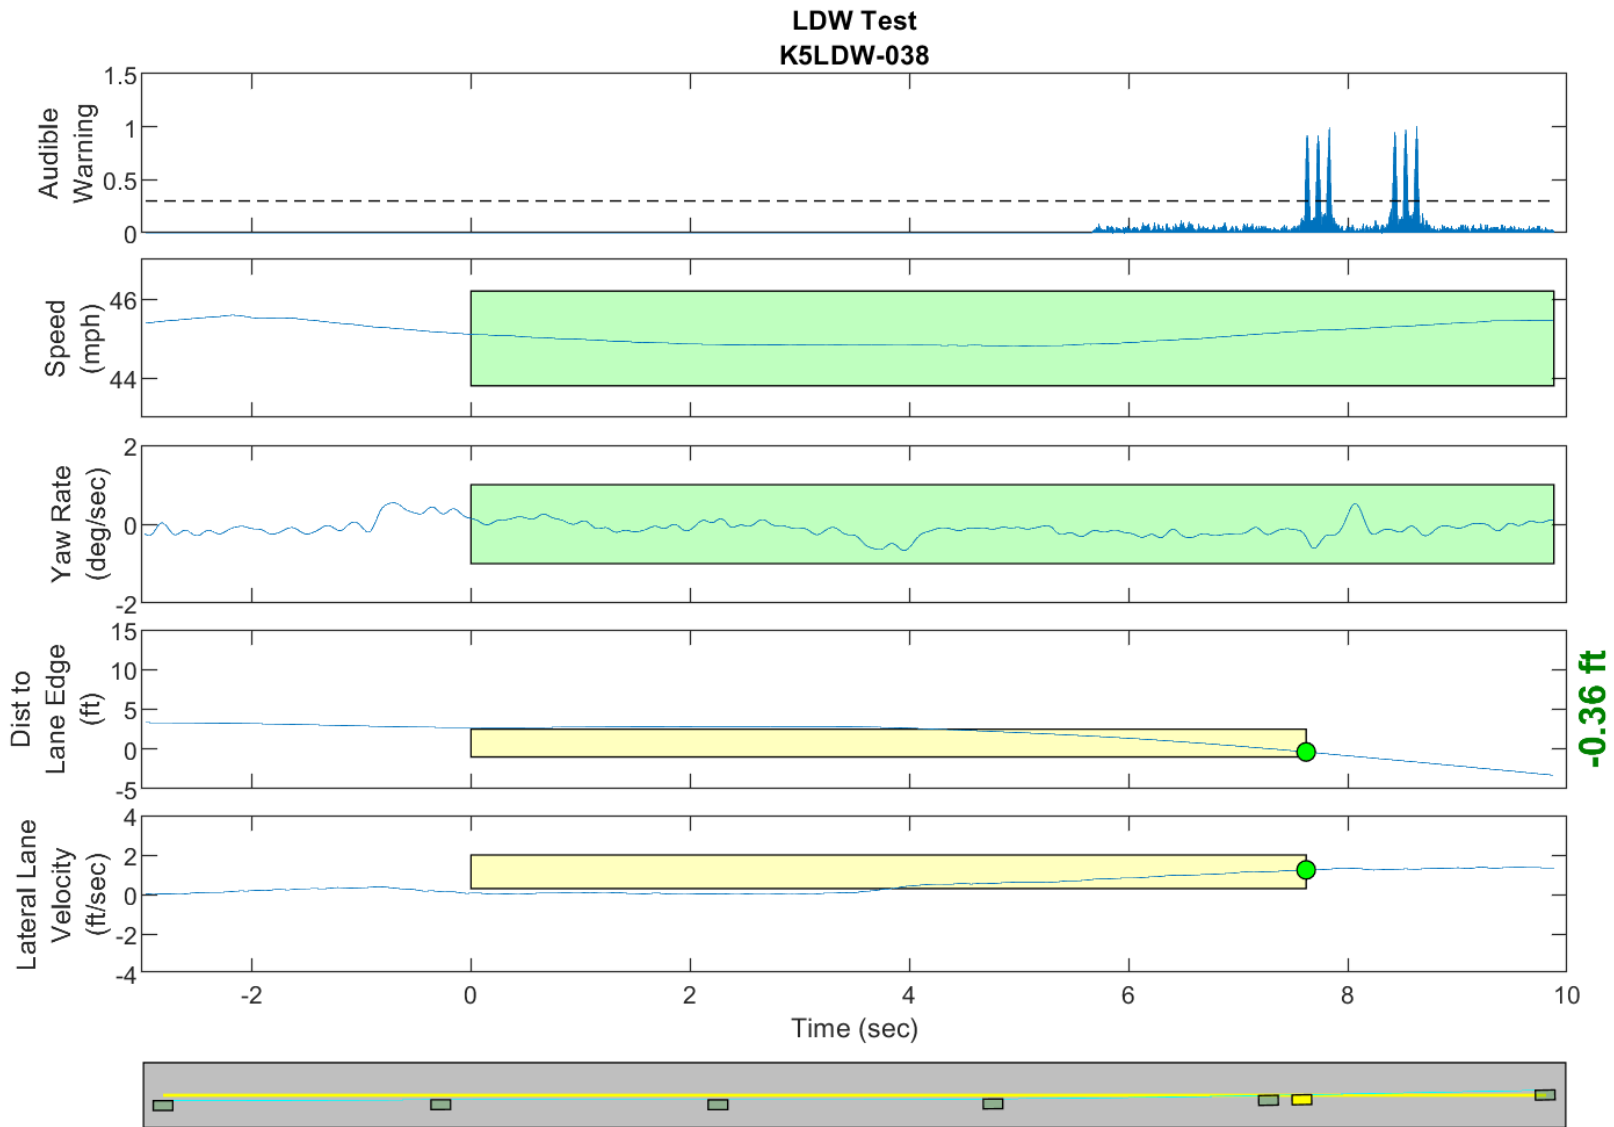


GPS Fix Type: RTK Fixed

Figure D72. Time History for Run 38, Botts Dots, Left Departure, Audible Warning

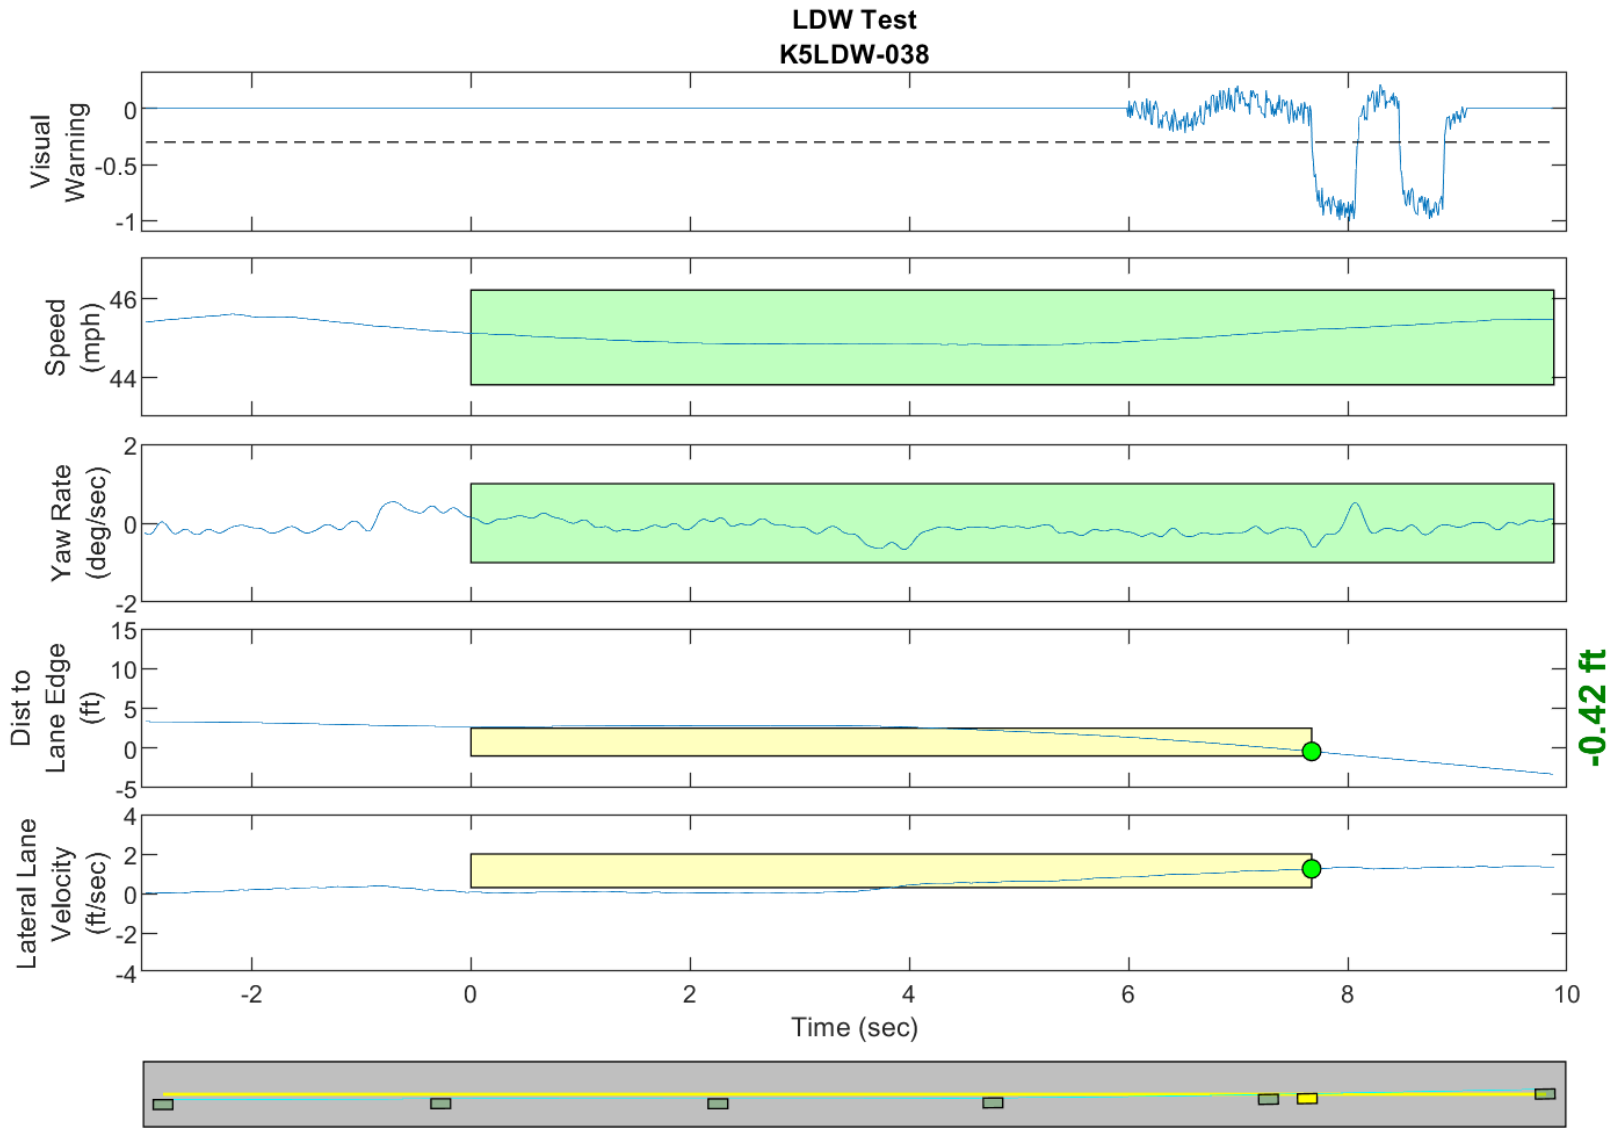


GPS Fix Type: RTK Fixed

Figure D73. Time History for Run 38, Botts Dots, Left Departure, Visual Warning

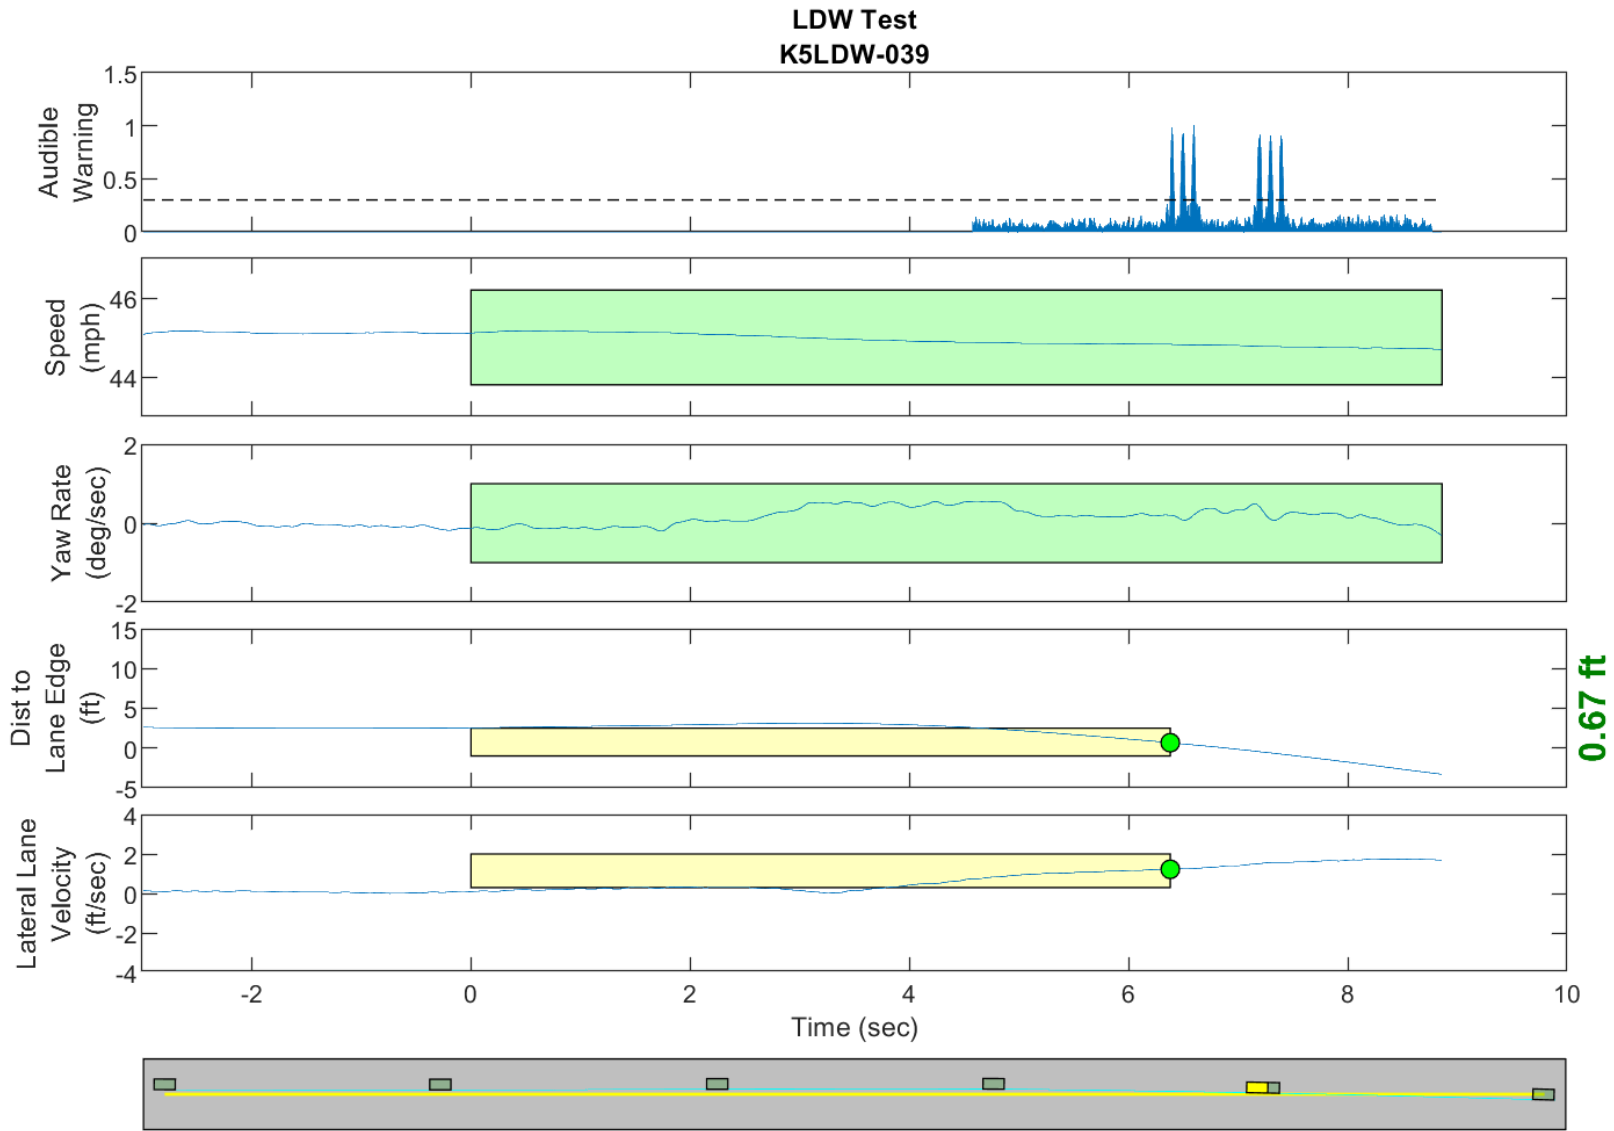


GPS Fix Type: RTK Fixed

Figure D74. Time History for Run 39, Botts Dots, Right Departure, Audible Warning

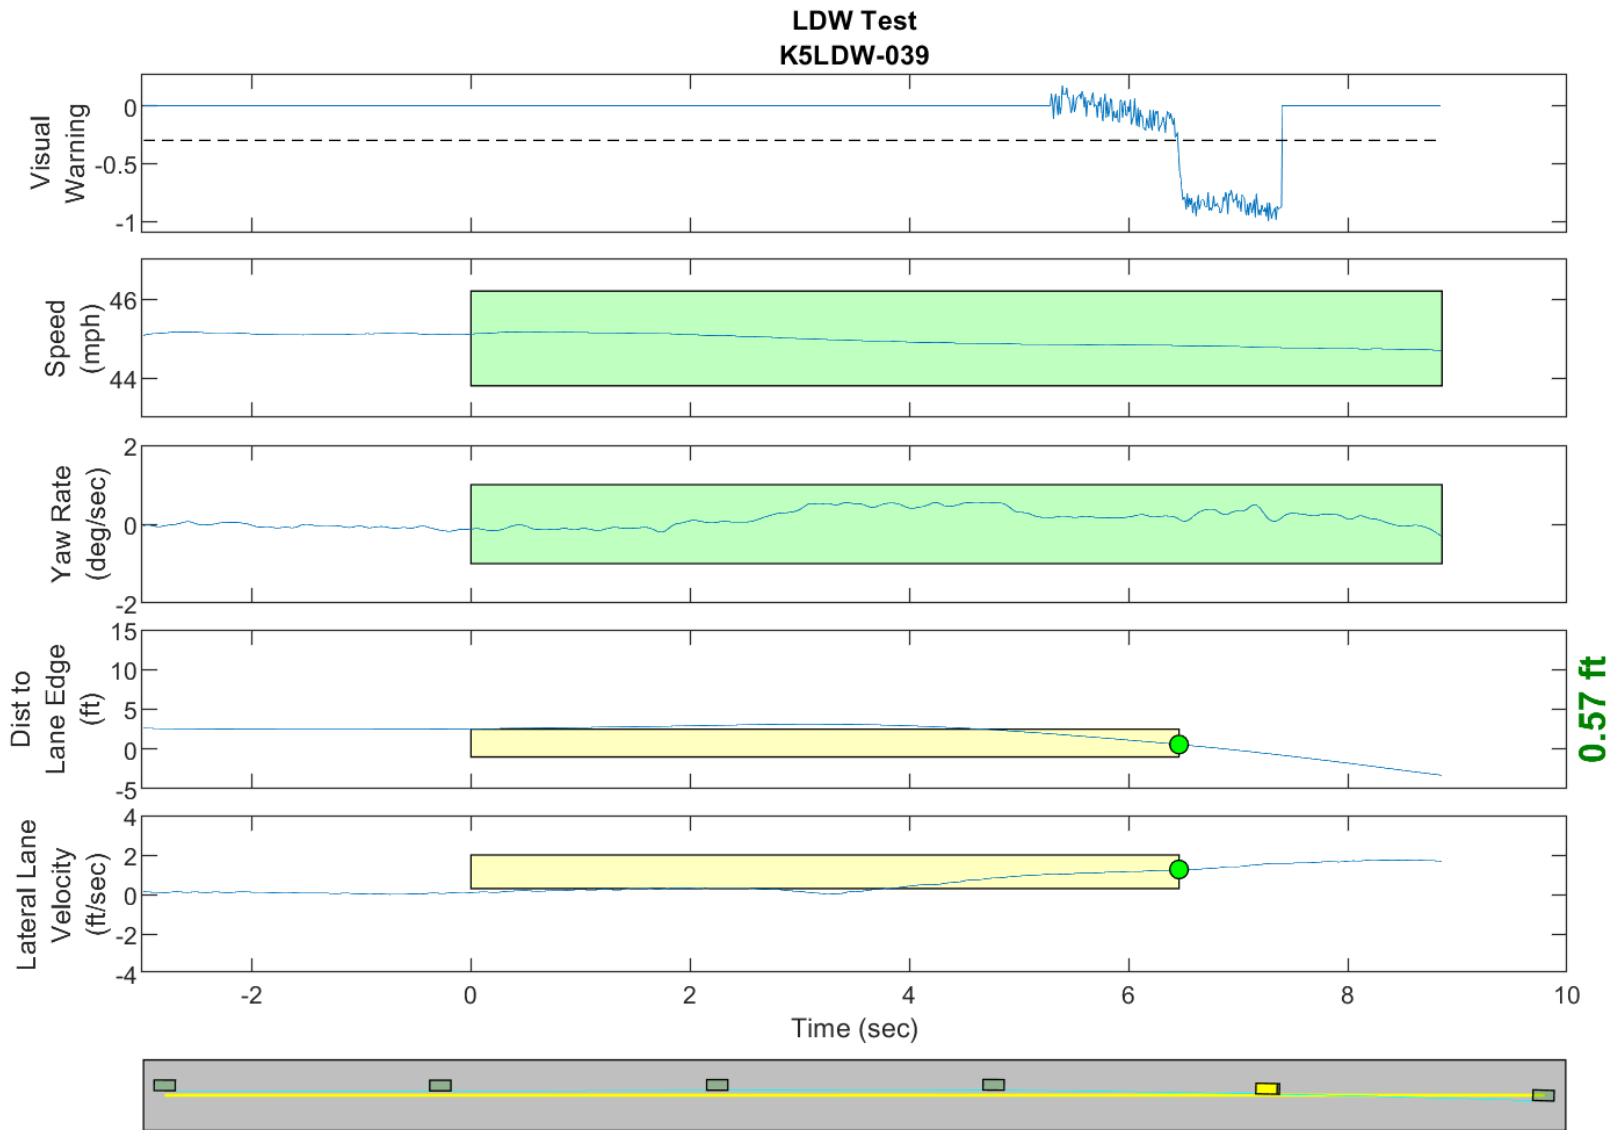

GPS Fix Type: RTK Fixed


Figure D75. Time History for Run 39, Botts Dots, Right Departure, Visual Warning

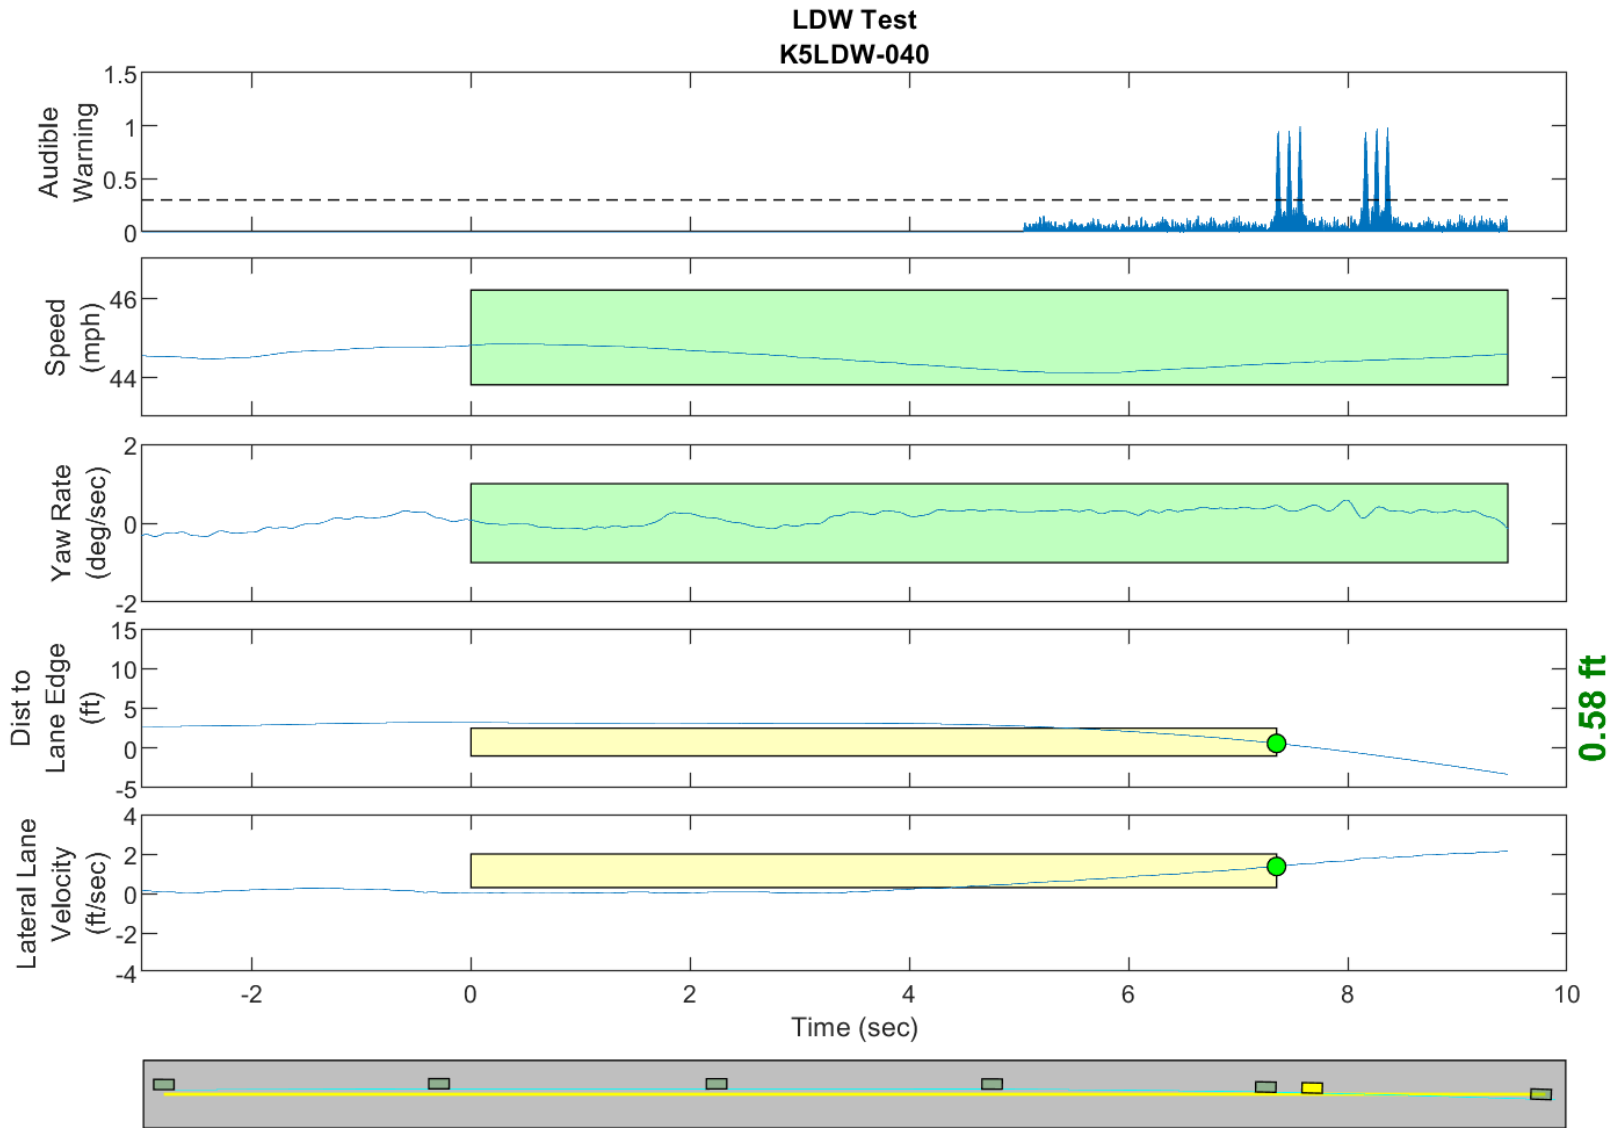

0.58 ft


GPS Fix Type: RTK Fixed

Figure D76. Time History for Run 40, Botts Dots, Right Departure, Audible Warning

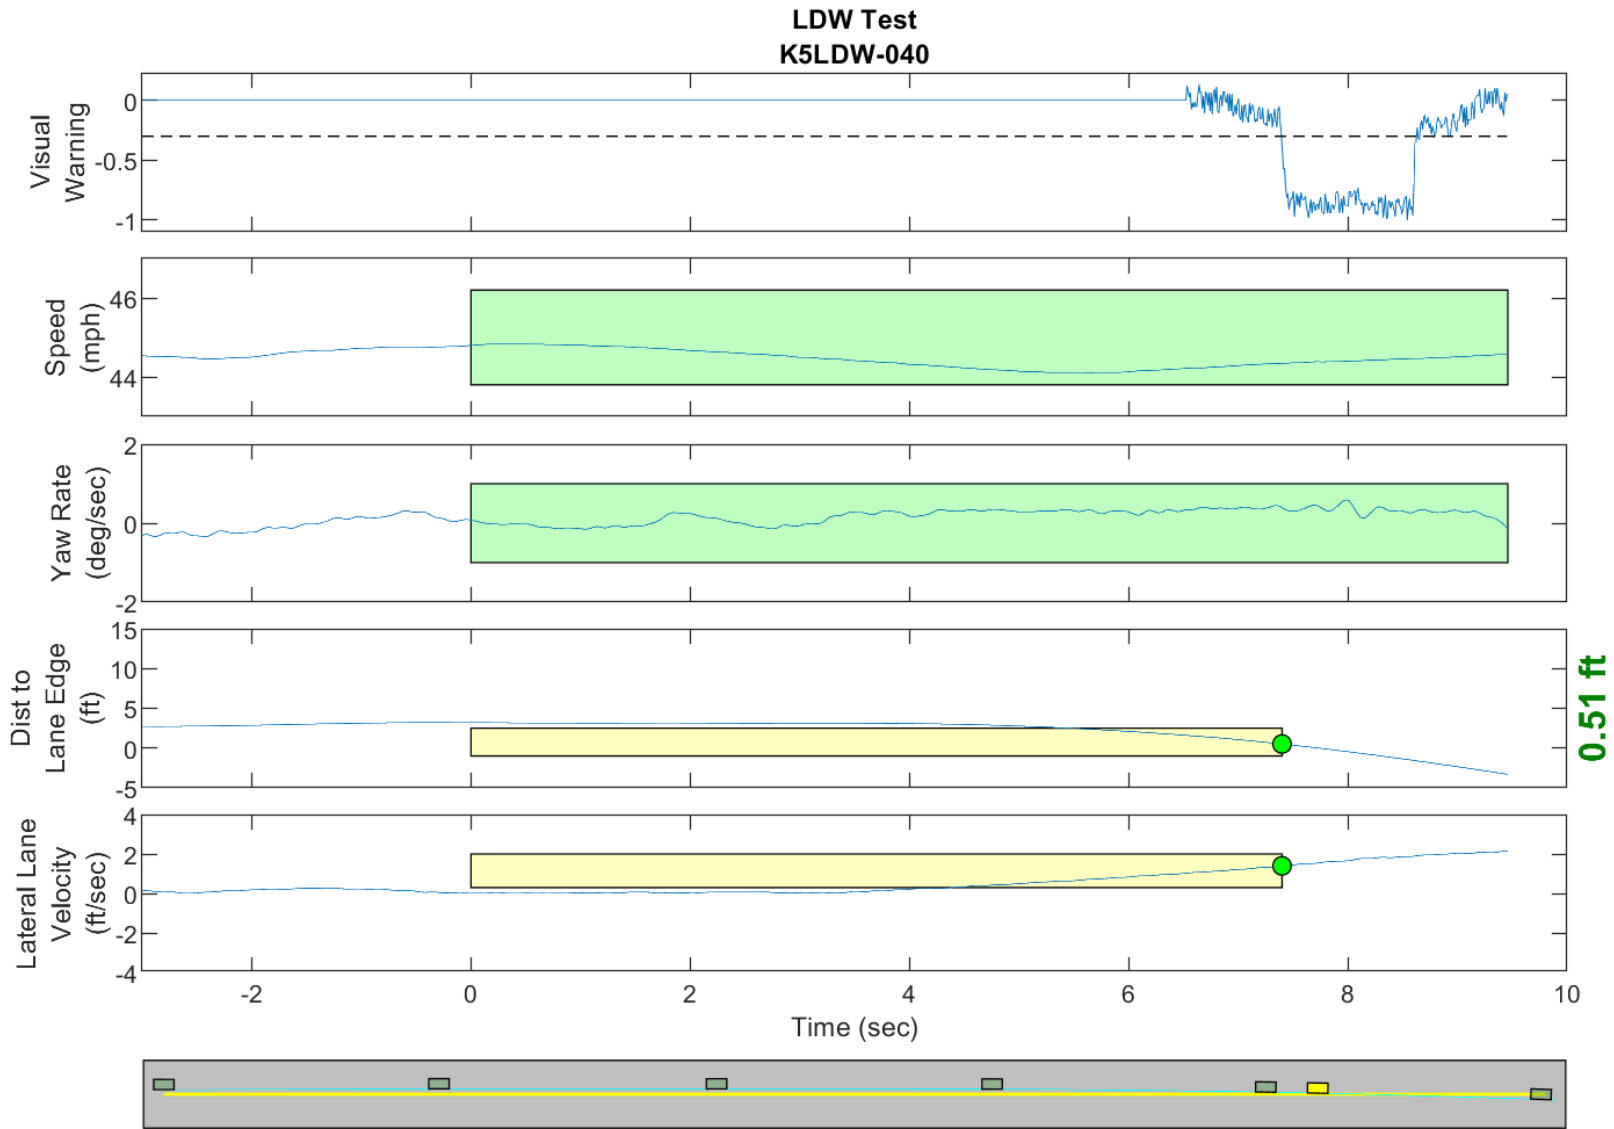


GPS Fix Type: RTK Fixed

Figure D77. Time History for Run 40, Botts Dots, Right Departure, Visual Warning

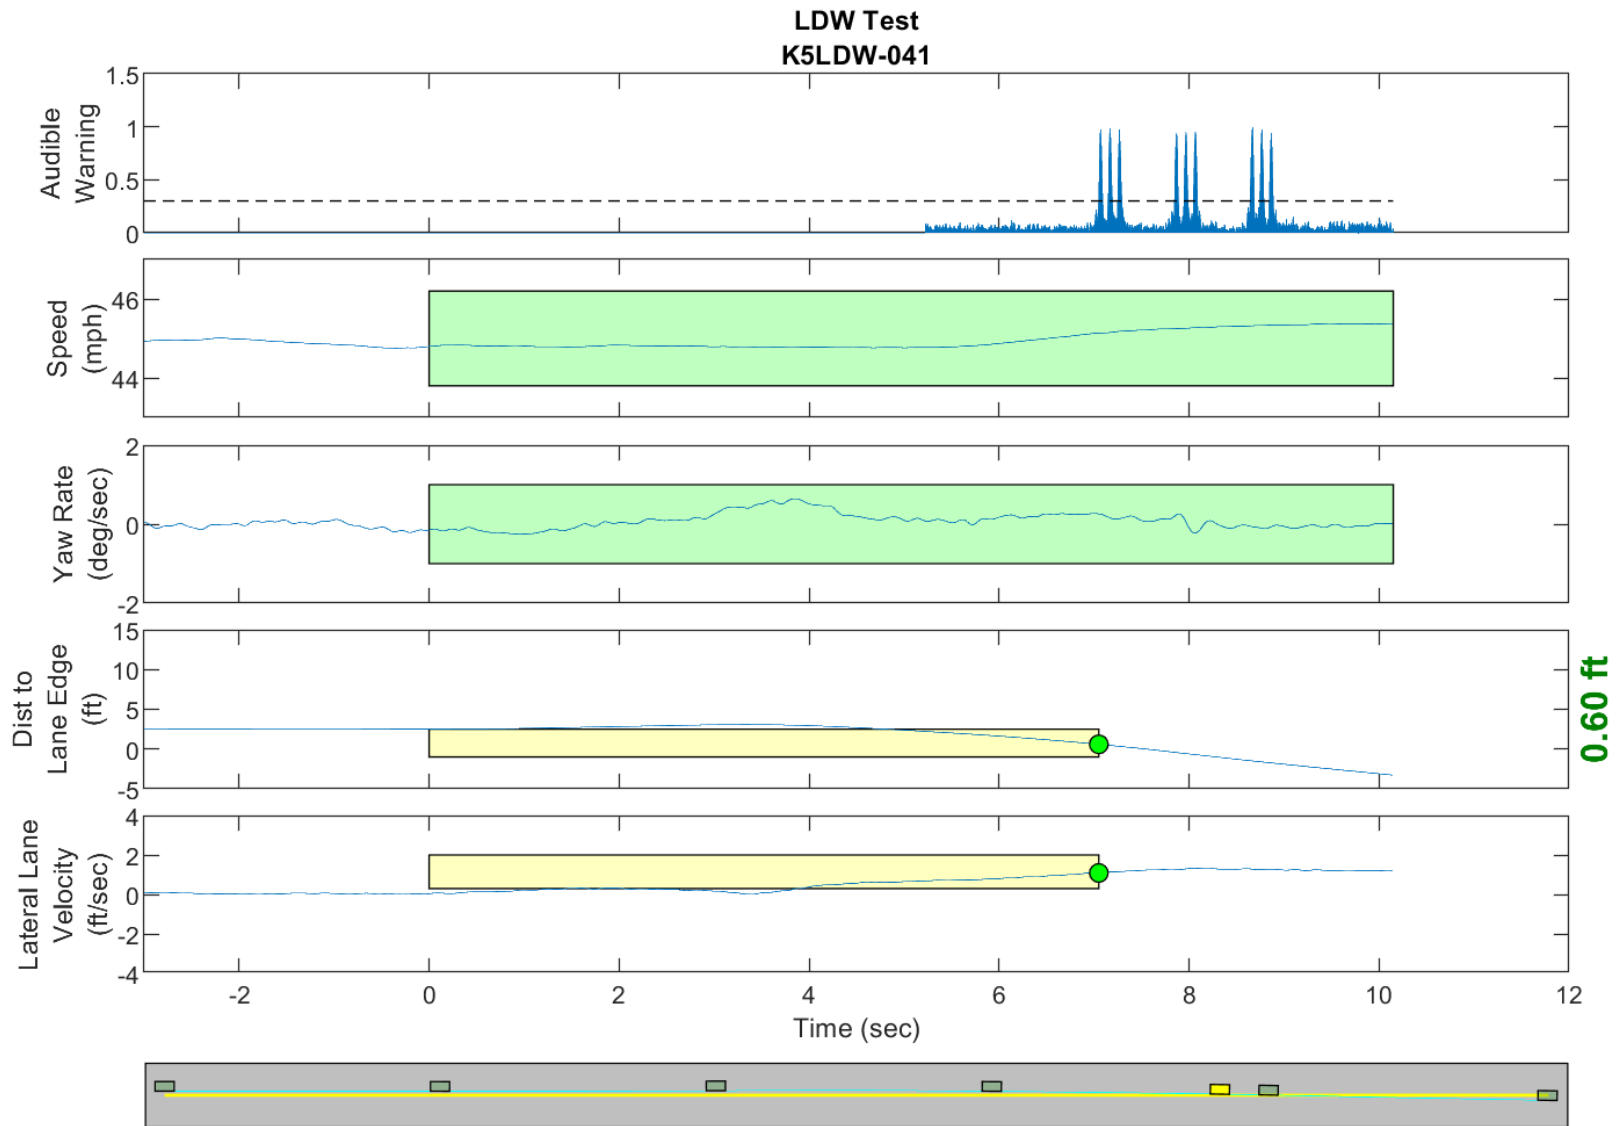


GPS Fix Type: RTK Fixed

Figure D78. Time History for Run 41, Botts Dots, Right Departure, Audible Warning

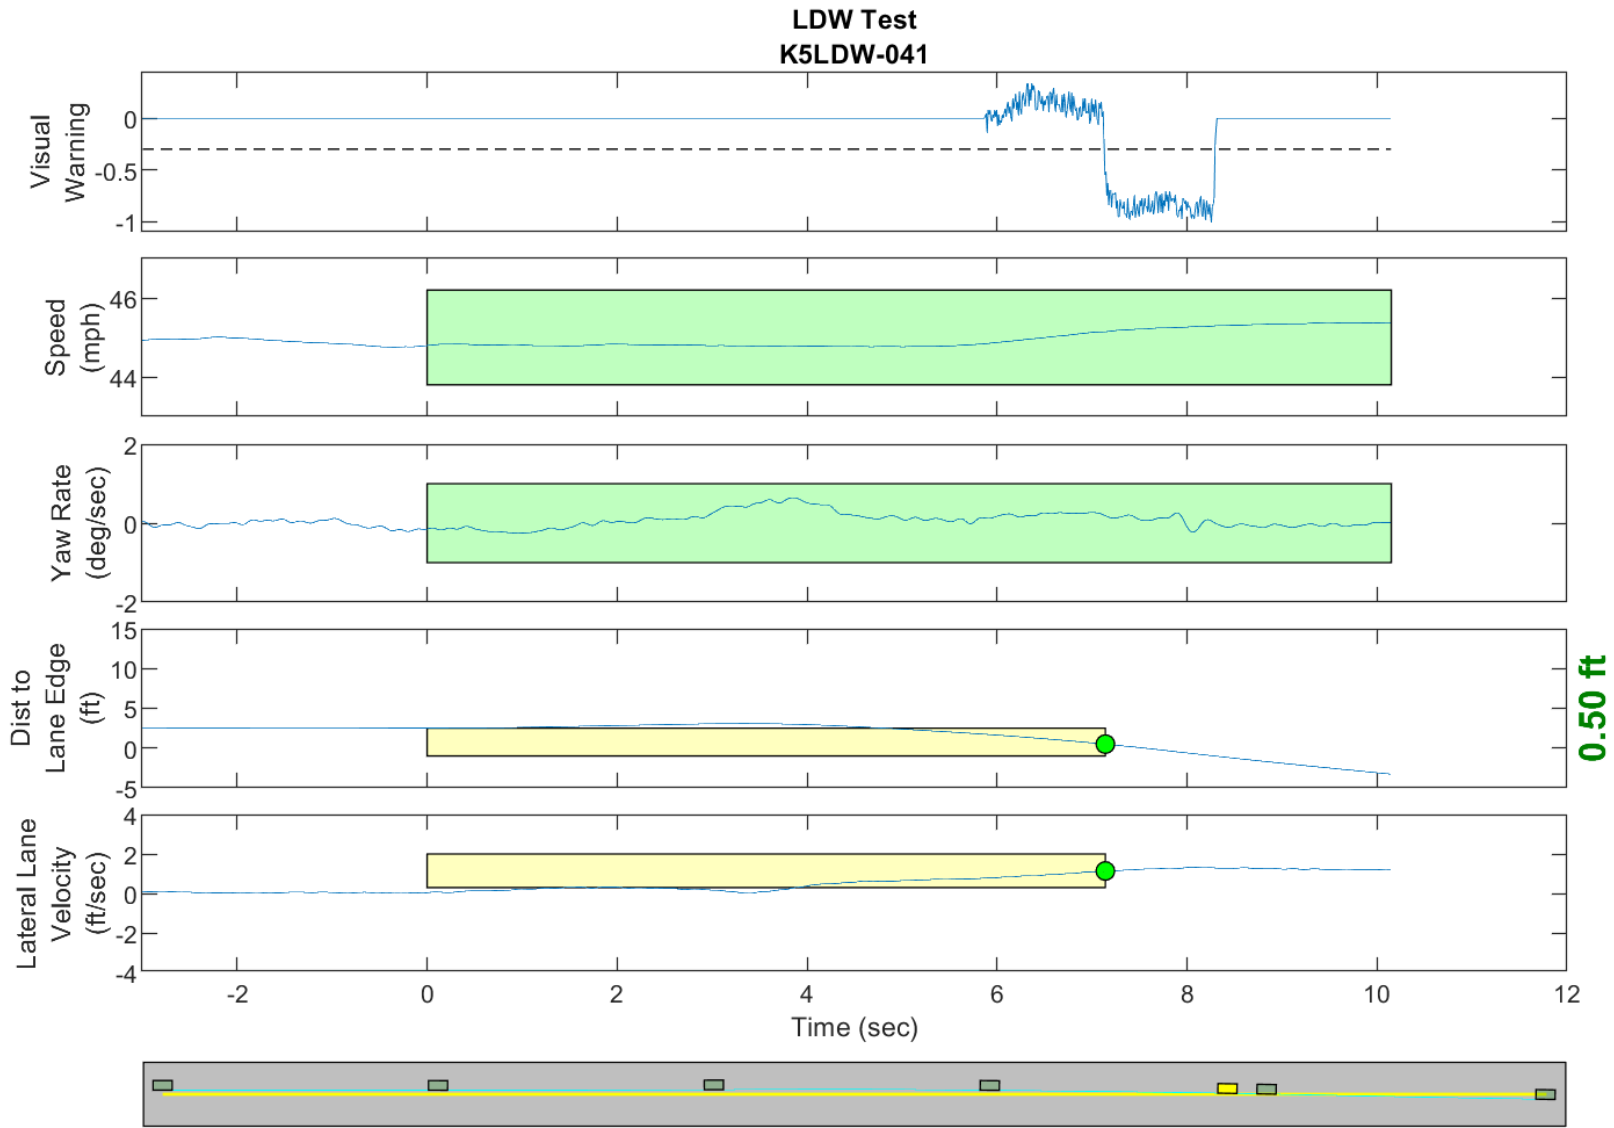


GPS Fix Type: RTK Fixed

Figure D79. Time History for Run 41, Botts Dots, Right Departure, Visual Warning

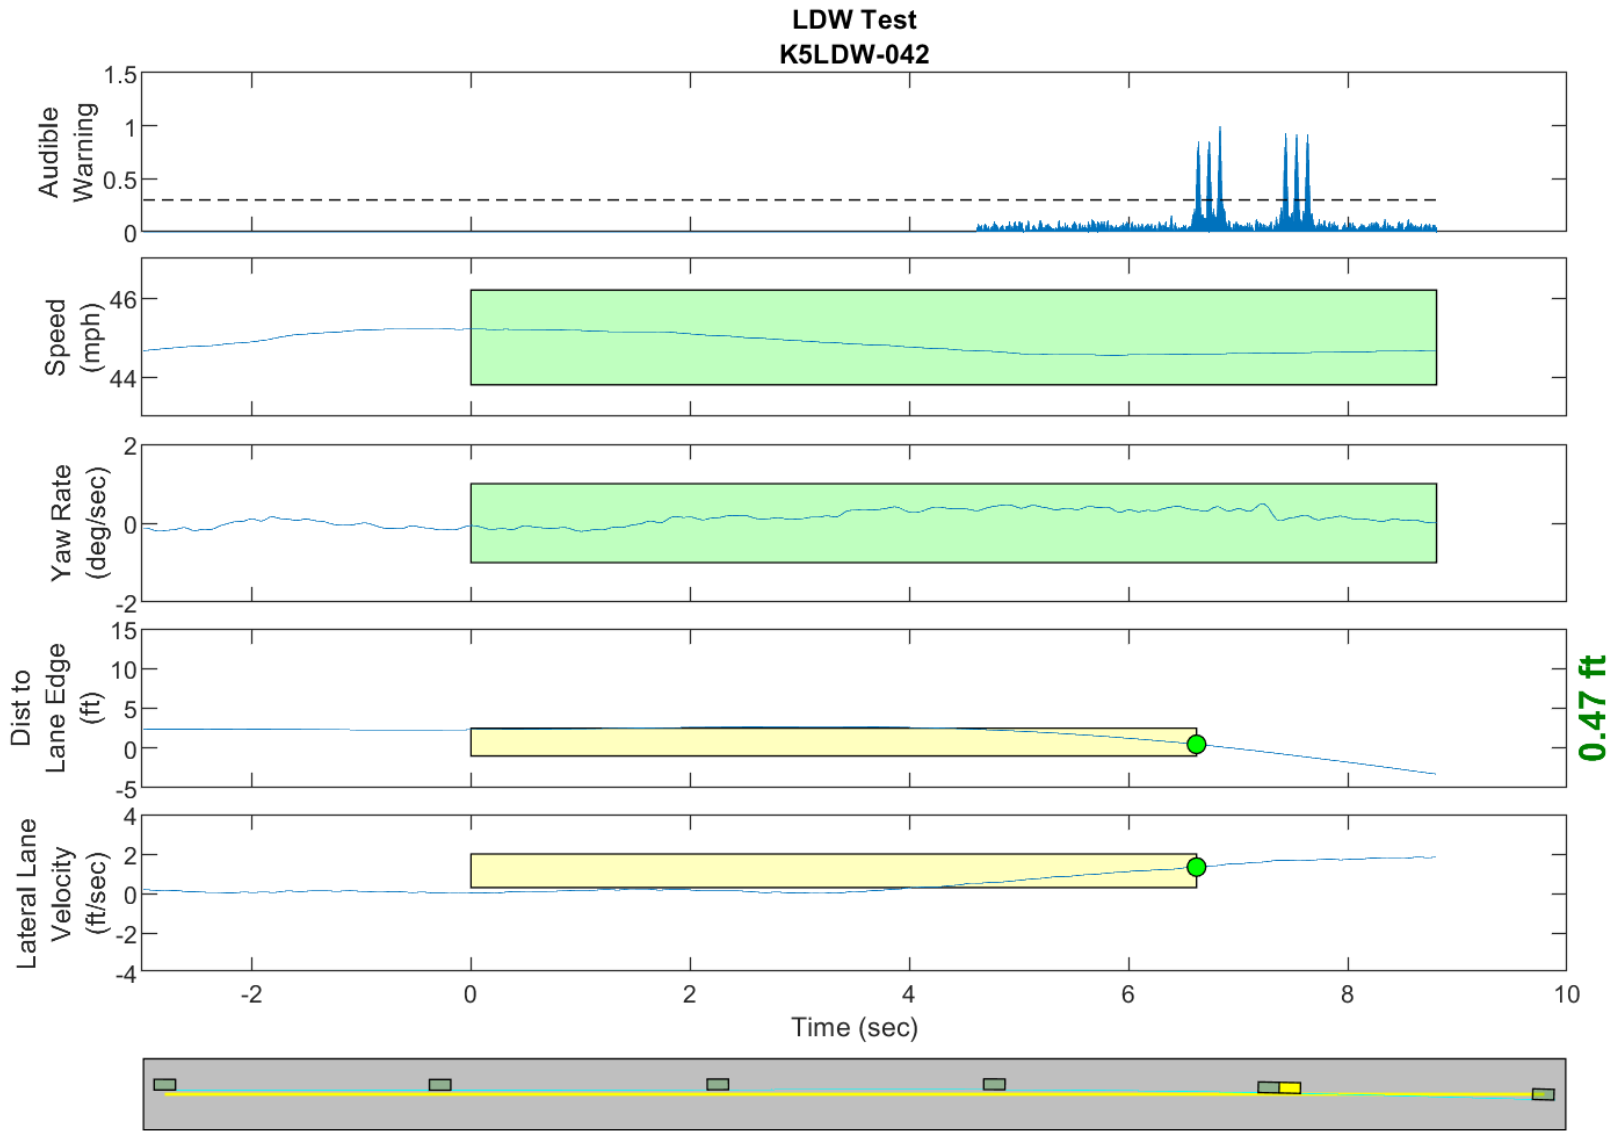


GPS Fix Type: RTK Fixed

Figure D80. Time History for Run 42, Botts Dots, Right Departure, Audible Warning

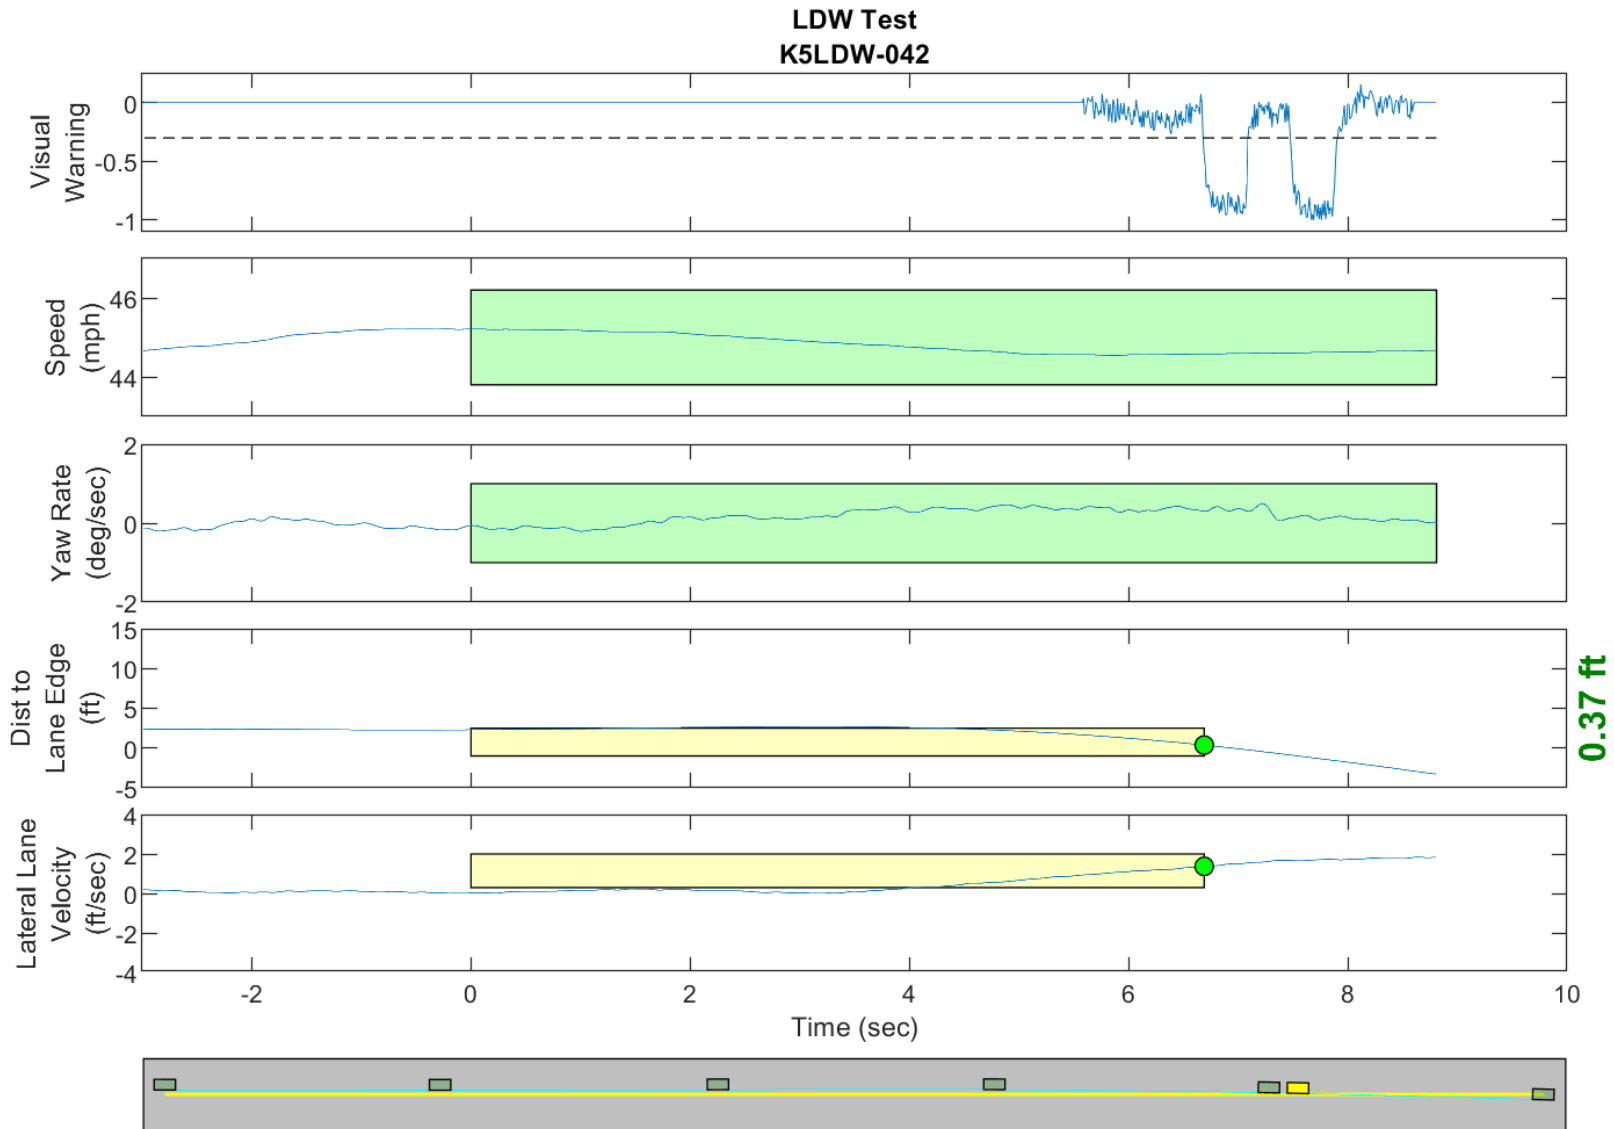


GPS Fix Type: RTK Fixed

Figure D81. Time History for Run 42, Botts Dots, Right Departure, Visual Warning

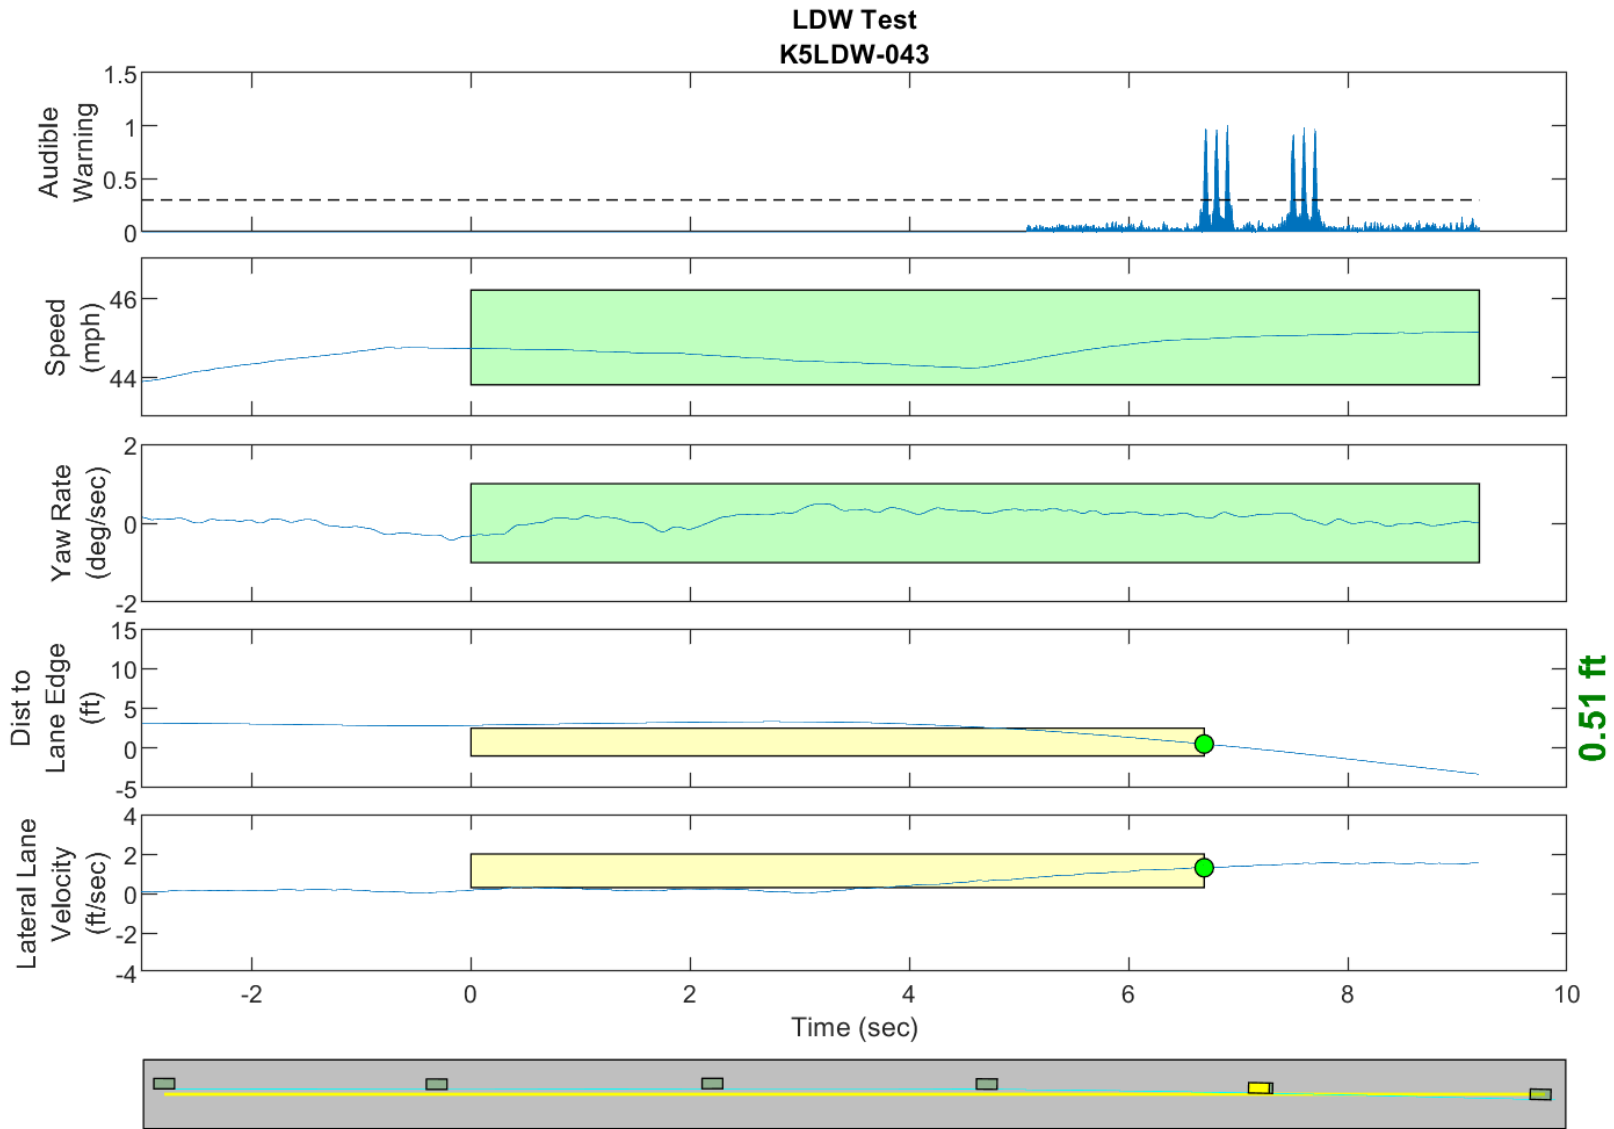


GPS Fix Type: RTK Fixed

Figure D82. Time History for Run 43, Botts Dots, Right Departure, Audible Warning

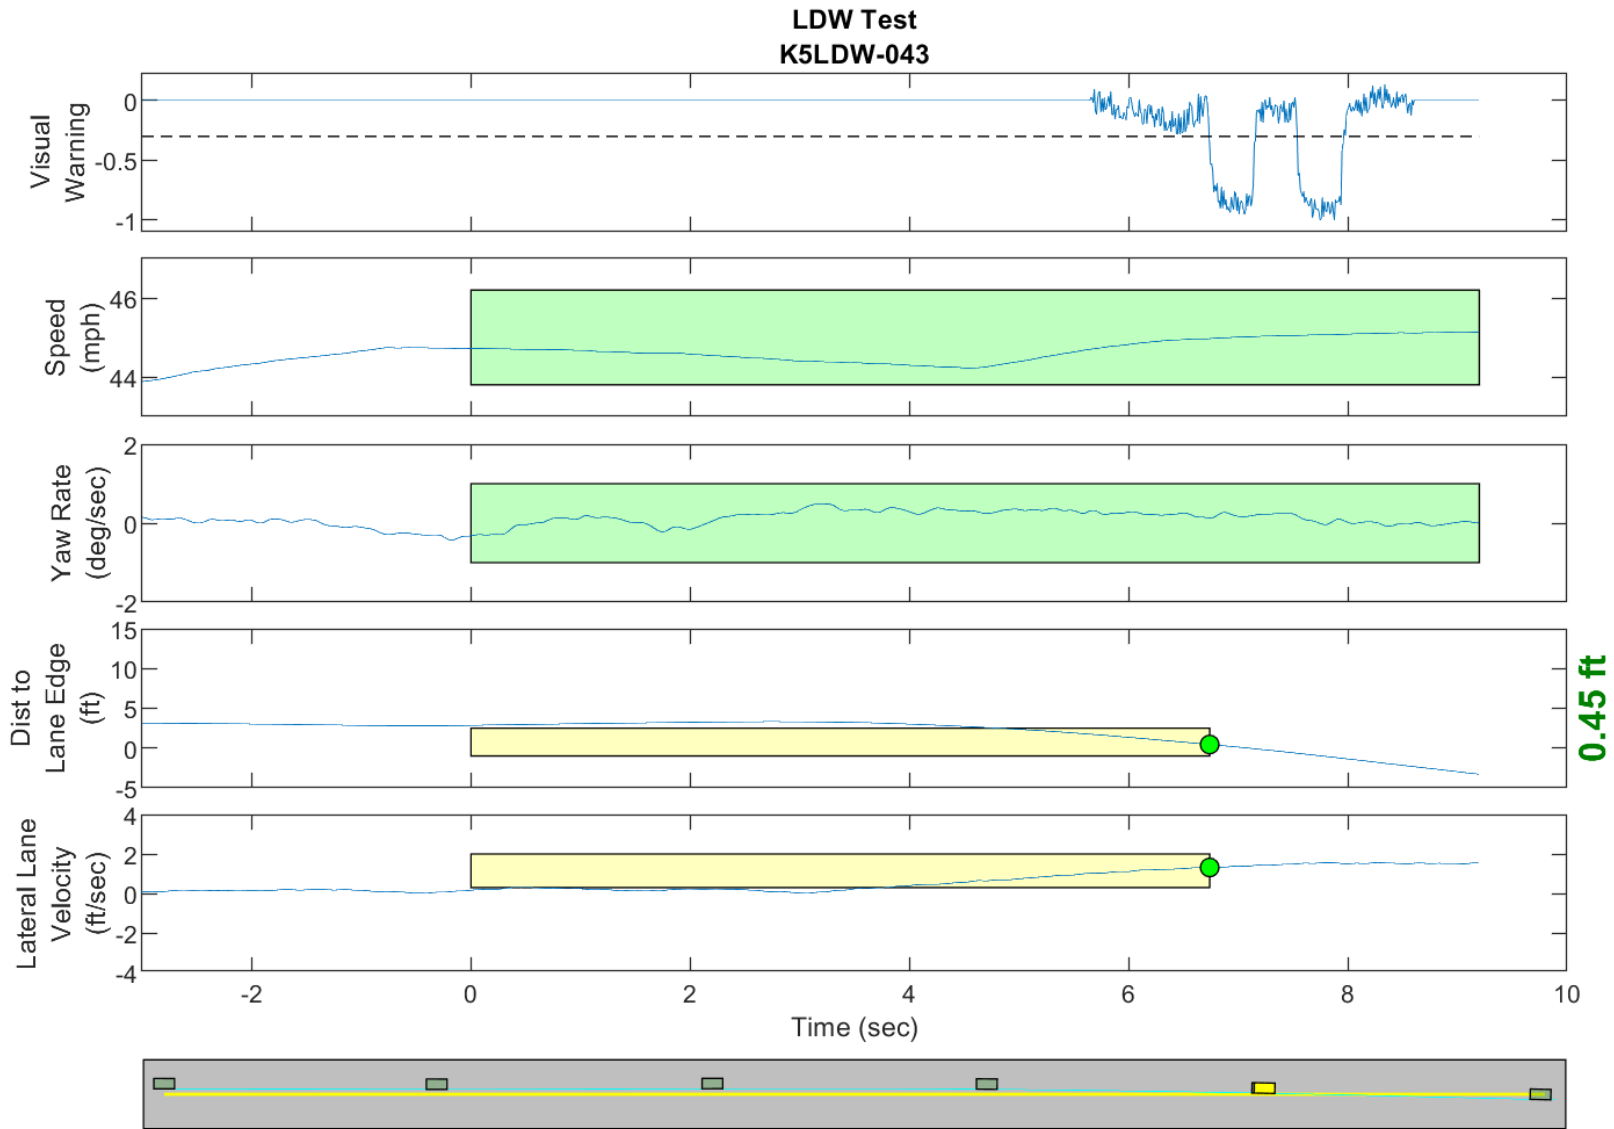


GPS Fix Type: RTK Fixed

Figure D83. Time History for Run 43, Botts Dots, Right Departure, Visual Warning

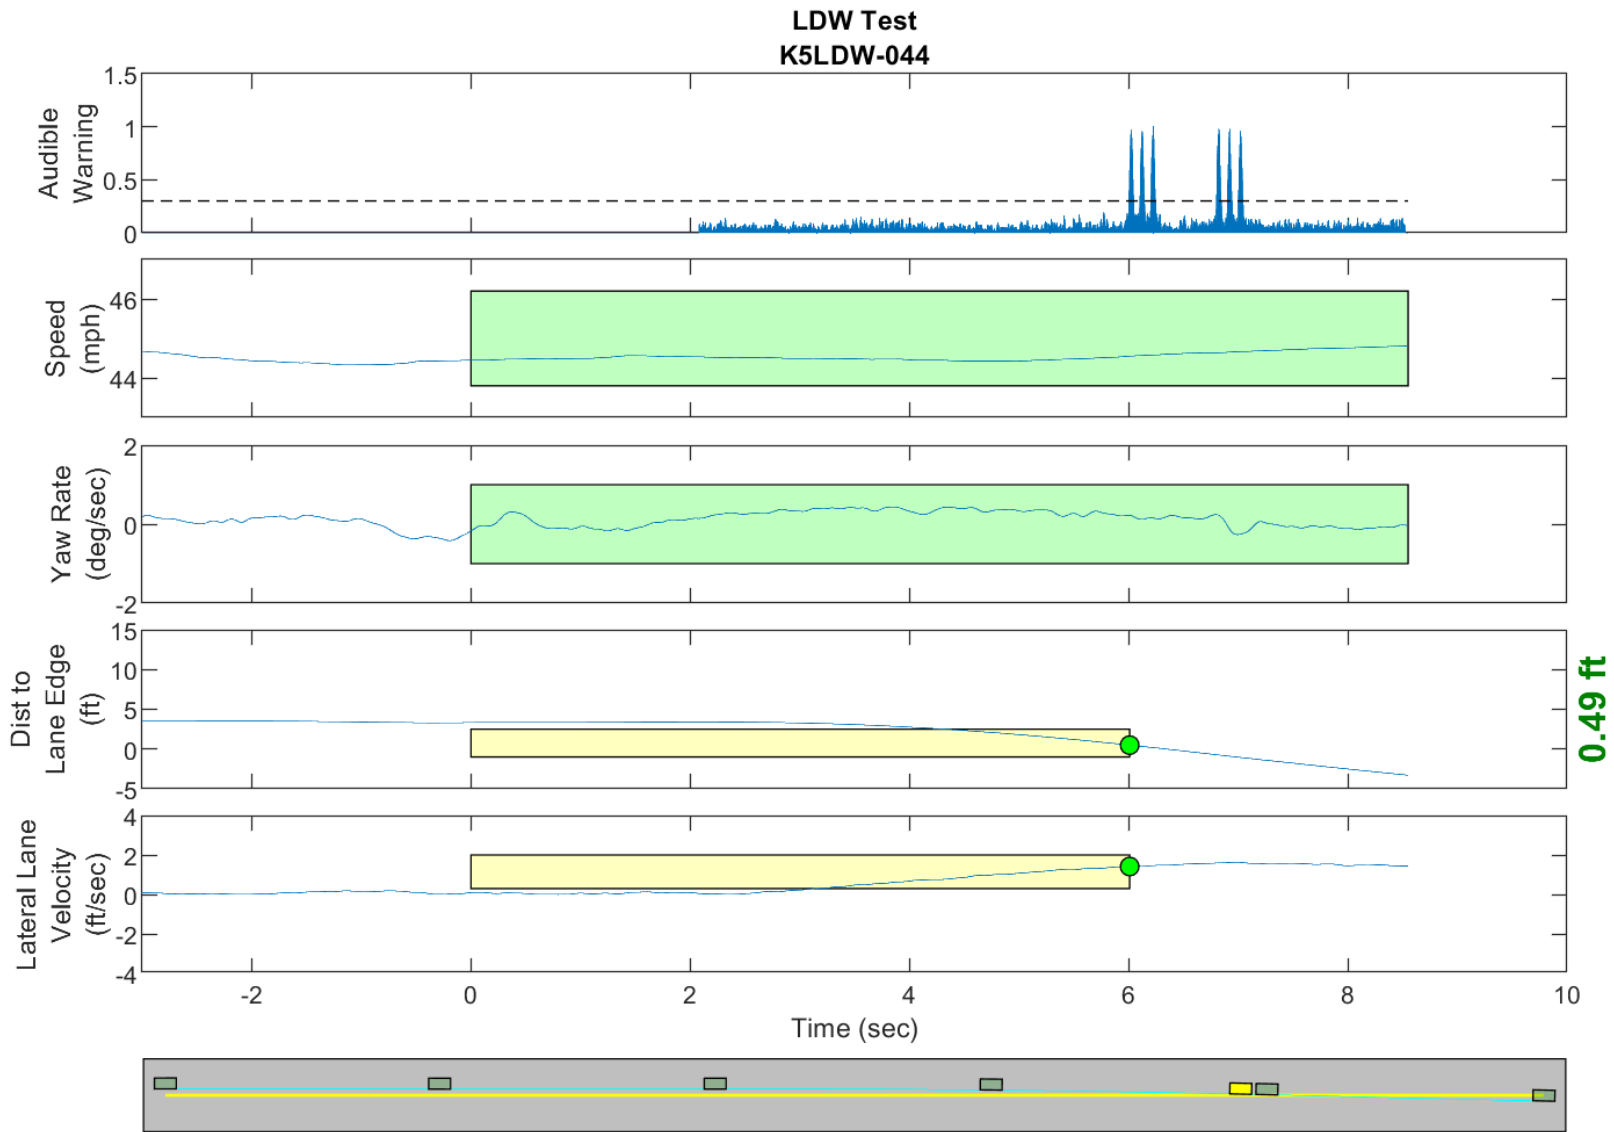


GPS Fix Type: RTK Fixed

Figure D84. Time History for Run 44, Botts Dots, Right Departure, Audible Warning

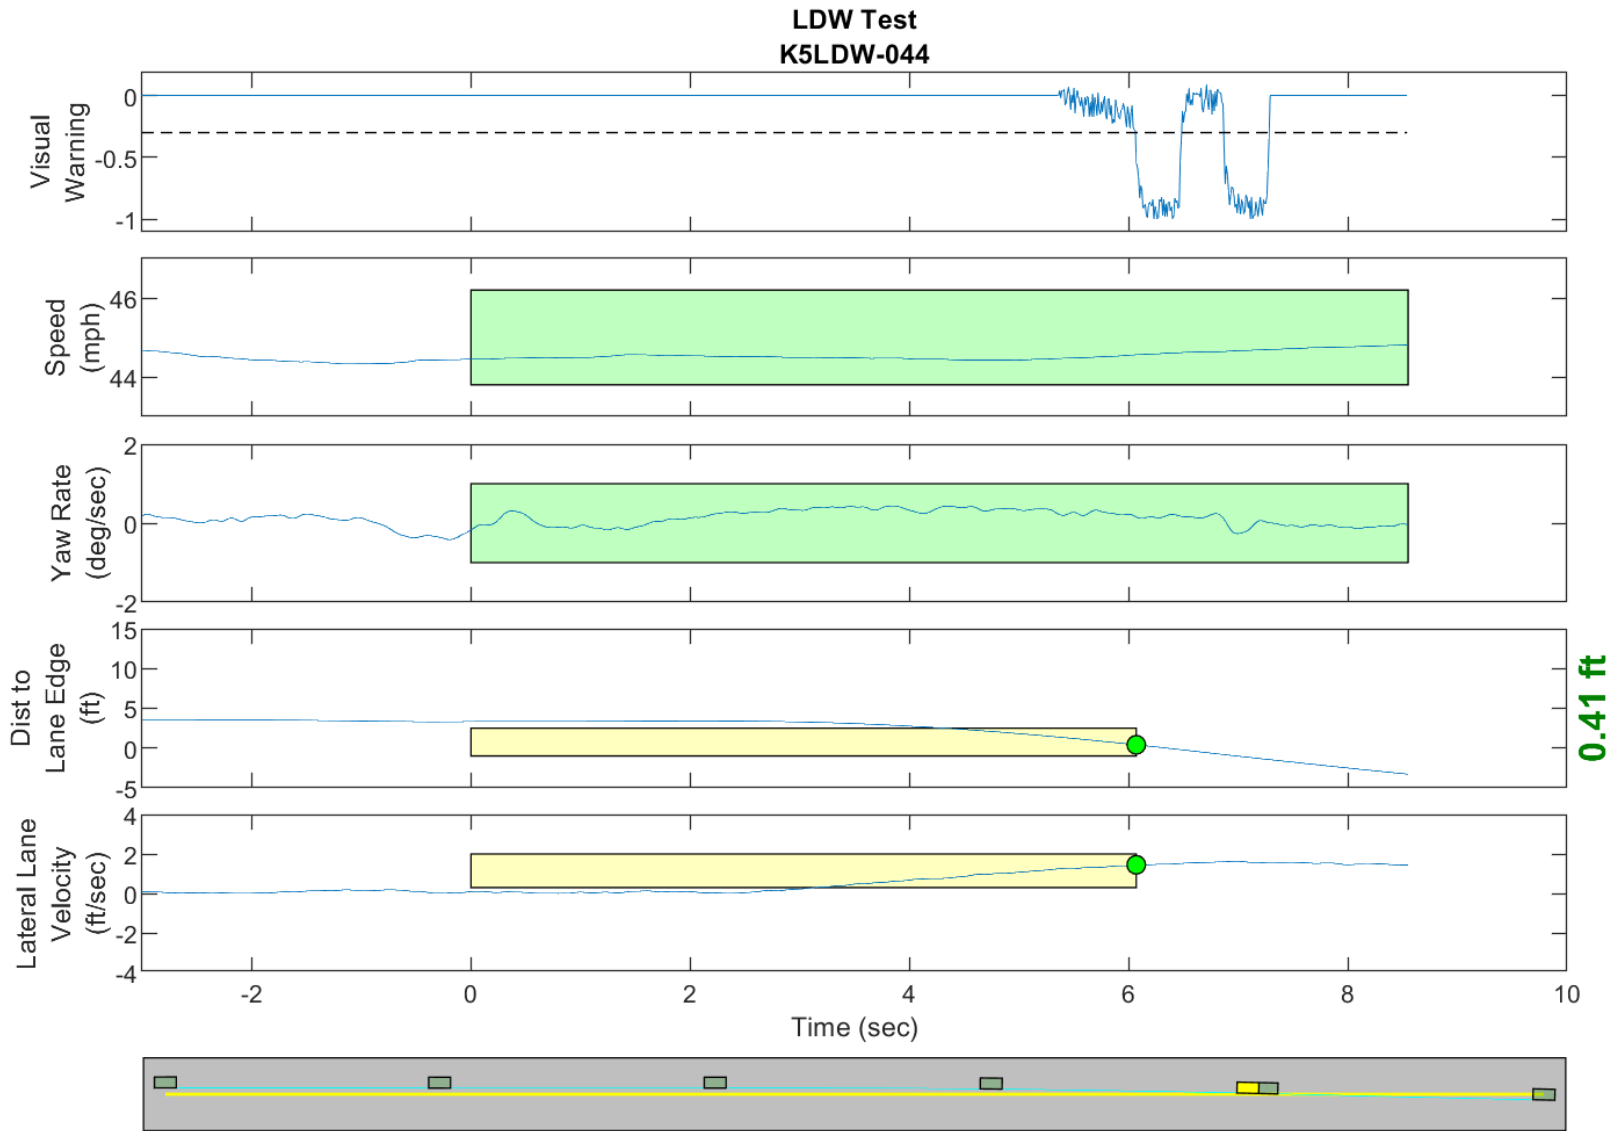


GPS Fix Type: RTK Fixed

Figure D85. Time History for Run 44, Botts Dots, Right Departure, Visual Warning

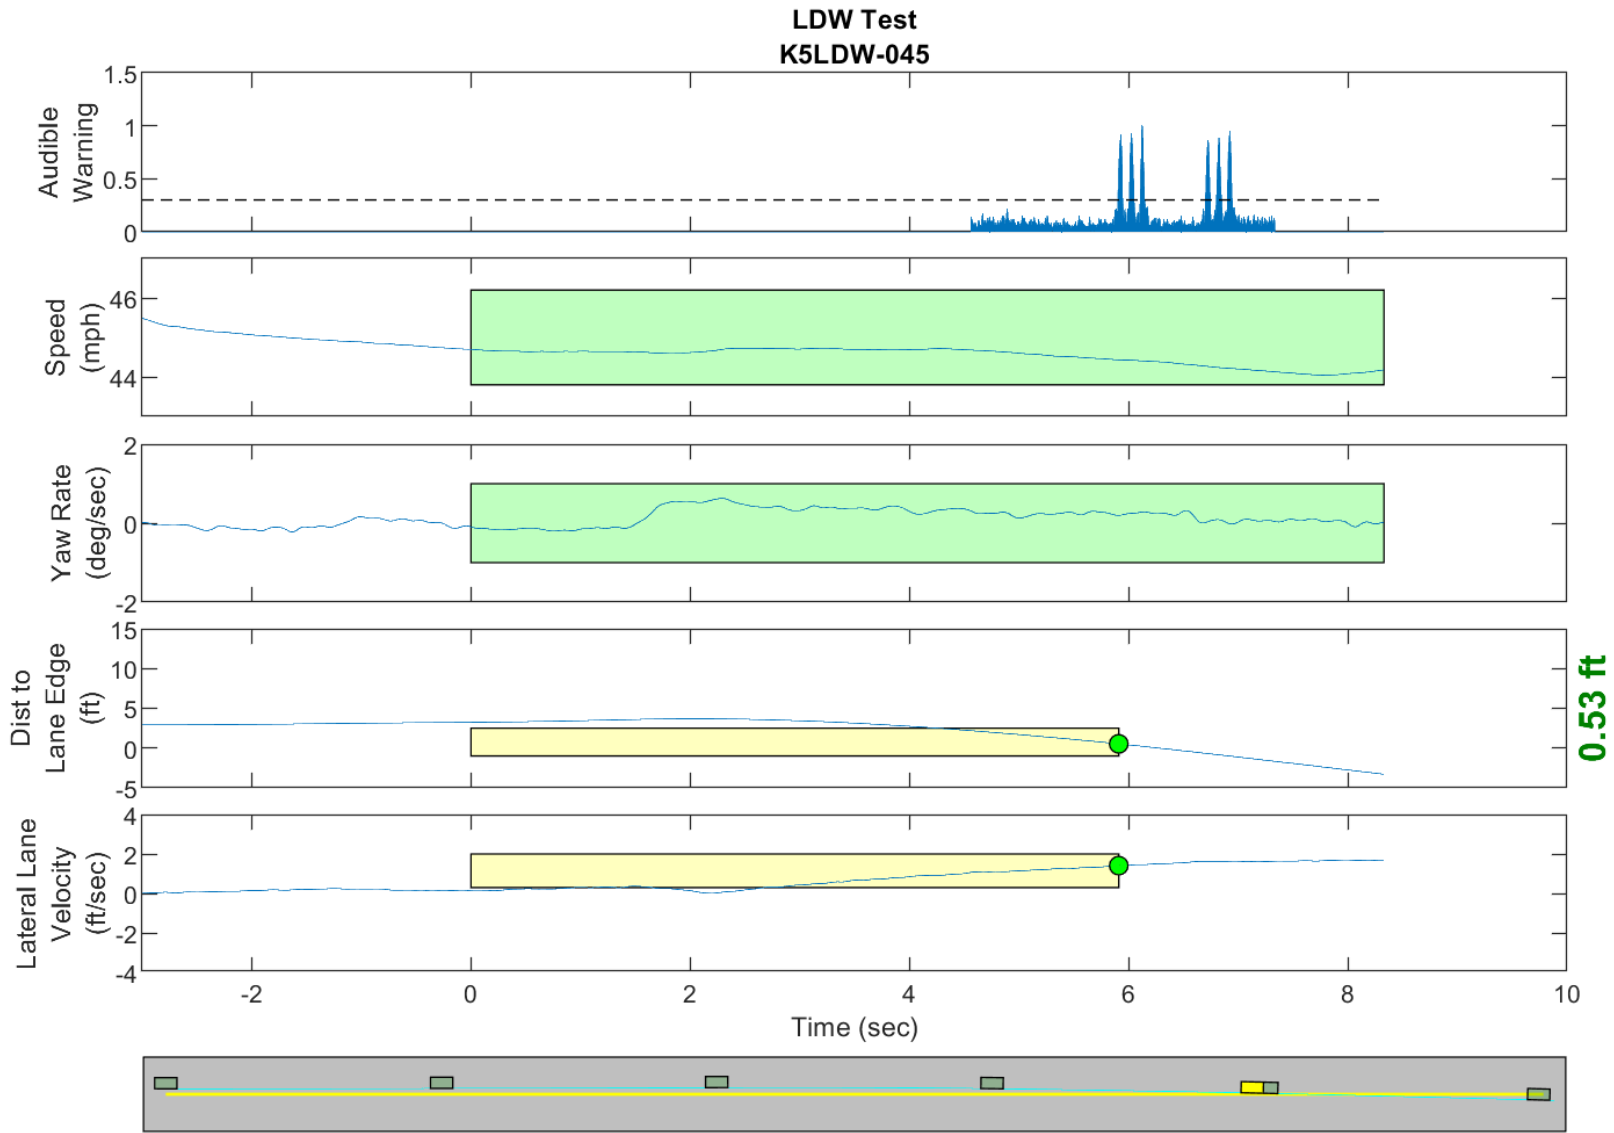

GPS Fix Type: RTK Fixed

Figure D86. Time History for Run 45, Botts Dots, Right Departure, Audible Warning

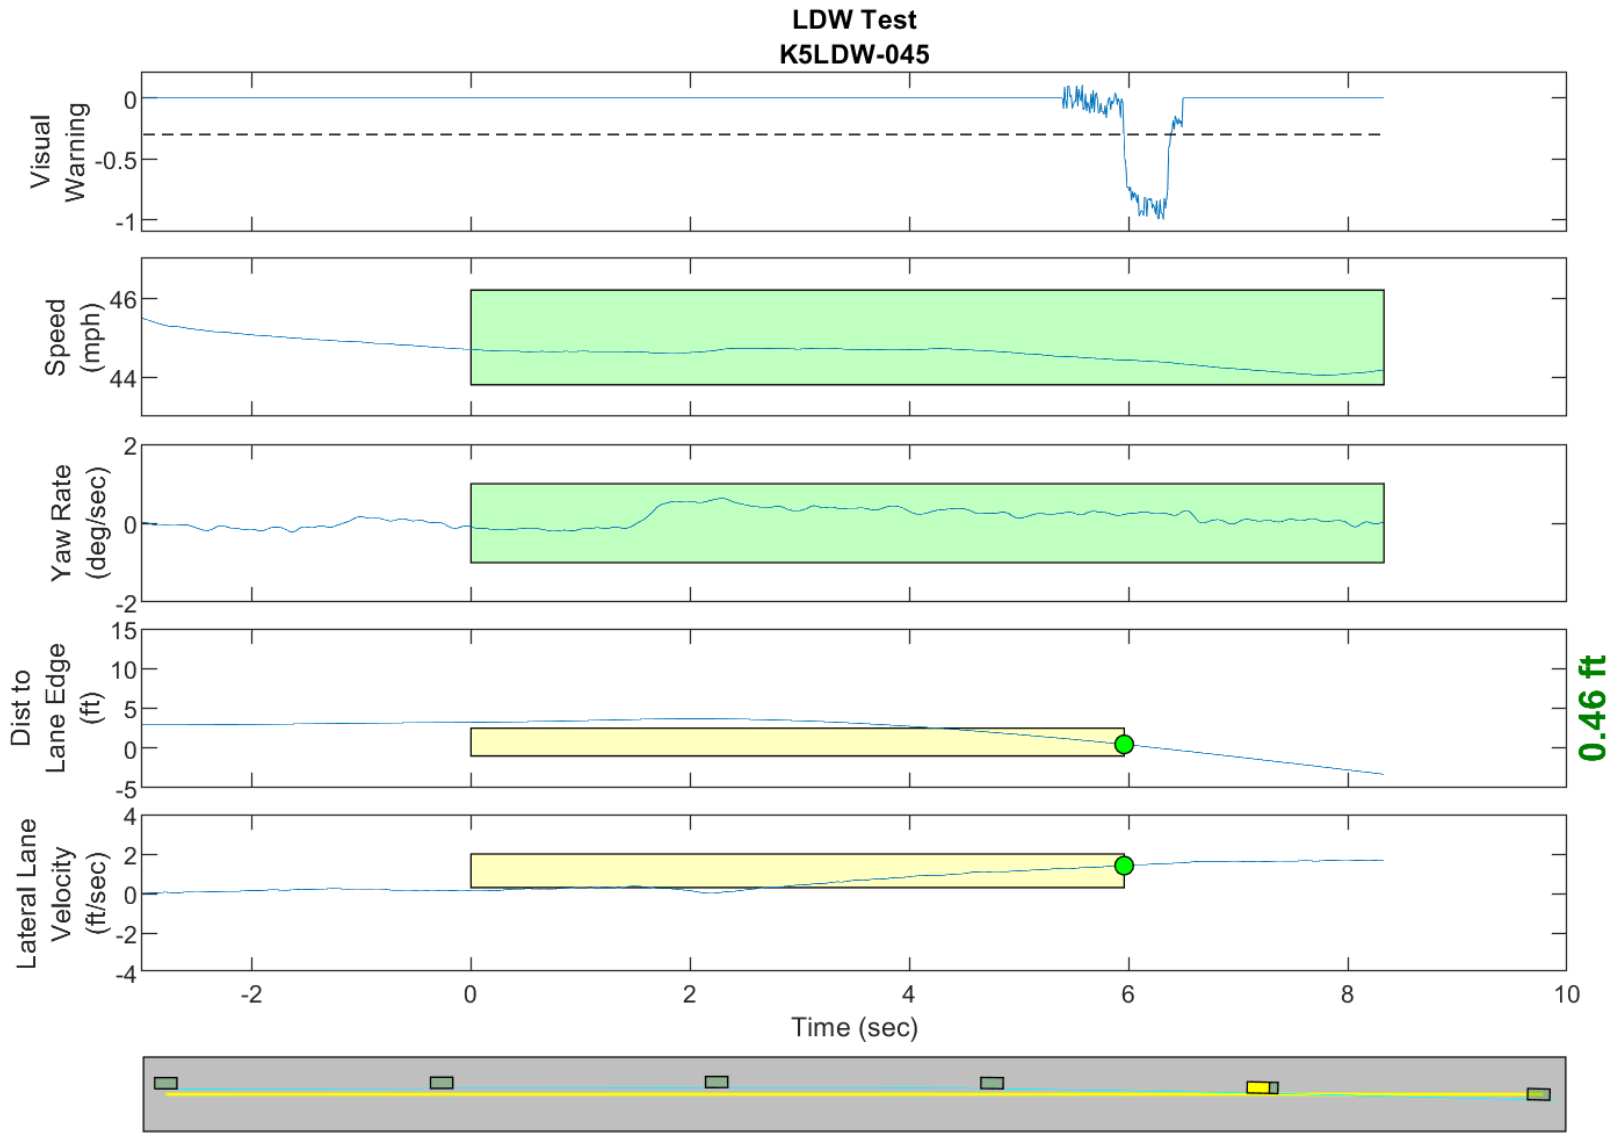

GPS Fix Type: RTK Fixed

Figure D87. Time History for Run 45, Botts Dots, Right Departure, Visual Warning