

**REPORT NUMBER: NCAP-CAL-20-009**

**NEW CAR ASSESSMENT PROGRAM (NCAP)  
FRONTAL BARRIER IMPACT TEST**

**Volkswagen Group of America  
2020 Volkswagen Passat  
Four Door Sedan**

**NHTSA No: M20205803**

**PREPARED BY:  
CALSPAN CORPORATION  
P.O. BOX 400  
BUFFALO, NEW YORK 104625**



**April 7, 2021**

**FINAL REPORT**

**PREPARED FOR:  
U. S. DEPARTMENT OF TRANSPORTATION  
NATIONAL HIGHWAY TRAFFIC SAFETY ADMINISTRATION  
OFFICE OF CRASHWORTHINESS STANDARDS  
1200 NEW JERSEY AVE SE, ROOM W43-410  
WASHINGTON, D.C. 20590**

This final test report was prepared for the U.S. Department of Transportation, National Highway Traffic Administration, in response to Contract Number 693JJ919D000005.

This publication is distributed by the U.S. Department of Transportation, National Highway Traffic Safety Administration, in the interest of information exchange. The opinions, findings and conclusions expressed in this publication are those of the author(s) and not necessarily those of the Department of Transportation or the National Highway Traffic Safety Administration. The United States Government assumes no liability for its contents or use thereof.

If trade or manufacturers' names or products are mentioned it is only because they are considered essential to the object of the publication and should not be construed as an endorsement. The United States Government does not endorse products or manufacturers.

Prepared by: Matthew Pronko  
Matthew Pronko, Test Engineer

Date: April 7, 2021

Approved by: Vanessa Hansen  
Vanessa Hansen, Operations Manager

Date: April 7, 2021

**FINAL REPORT ACCEPTANCE BY OCWS:**

\_\_\_\_\_  
Division Chief, New Car Assessment Program  
NHTSA, Office of Crashworthiness Standards

Date: \_\_\_\_\_

\_\_\_\_\_  
COTR, New Car Assessment Program  
NHTSA, Office of Crashworthiness Standards

Date: \_\_\_\_\_

**TECHNICAL REPORT DOCUMENTATION PAGE**

<b>1. Report No.</b> NCAP-CAL-20-009		<b>2. Government Accession No.</b>		<b>3. Recipient's Catalog No.</b>																																																					
<b>4. Title and Subtitle</b> Final Report of New Car Assessment Program Frontal Impact Testing of a 2020 Volkswagen Passat four door sedan NHTSA No.: M20205803				<b>5. Report Date</b> April 7, 2021																																																					
				<b>6. Performing Organization Code</b> CAL																																																					
<b>7. Author(s)</b> Matthew Pronko, Test Engineer Vanessa Hansen, Operations Manager				<b>8. Performing Organization Report No.</b> CAL-DOT-2020-009																																																					
<b>9. Performing Organization Name and Address</b> Calspan Corporation Transportation Test Operations P.O. Box 400 Buffalo, New York 104625				<b>10. Work Unit No.</b>																																																					
				<b>11. Contract or Grant No.</b> 693JJ919D000005																																																					
<b>12. Sponsoring Agency Name and Address</b> U.S. Department of Transportation National Highway Traffic Safety Administration Office of Crashworthiness Standards 1200 New Jersey Ave., SE, Room W43-410 Washington, D.C. 20590				<b>13. Type of Report and Period Covered:</b> Final Test Report March 4, 2020 - April 7, 2021																																																					
				<b>14. Sponsoring Agency Code</b> NRM-110																																																					
<b>15. Supplementary Notes</b>																																																									
<b>16. Abstract</b> A 56.30 km/h (35 mph), NCAP frontal rigid barrier impact test was conducted on a 2020 Volkswagen Passat four door sedan in accordance with the specifications of the Office of Crashworthiness Standards Laboratory Procedure for NCAP Full Frontal Rigid Barrier Impact Testing. This test was conducted to obtain data related to FMVSS Nos. 208, 212, 219 (partial), 301, and 305 performance. The test was conducted at Calspan Corporation's Transportation Test Operations facility in Buffalo, New York on March 4, 2020.  The impact velocity of the vehicle was 56.29 km/h, and the ambient temperature at the barrier face at the time of impact was 21°C. The target vehicle post-test maximum crush was 593 mm at C3 to the left side of the front bumper. The test vehicle's occupant performance data is as follows:																																																									
<table border="1"> <thead> <tr> <th rowspan="2">Measurement Description</th> <th rowspan="2">Units</th> <th colspan="2">Driver ATD (Serial No. 142)</th> <th colspan="2">Passenger ATD (Serial No. 139)</th> </tr> <tr> <th>Threshold</th> <th>Result</th> <th>Threshold</th> <th>Result</th> </tr> </thead> <tbody> <tr> <td>Head Injury Criteria (HIC<sub>15</sub>)</td> <td></td> <td>700</td> <td>169.562</td> <td>700</td> <td>266.853</td> </tr> <tr> <td>Maximum Chest Compression</td> <td>mm</td> <td>63</td> <td>-26.588</td> <td>52</td> <td>-25.007</td> </tr> <tr> <td>Nij</td> <td></td> <td>1</td> <td>0.285</td> <td>1</td> <td>0.465</td> </tr> <tr> <td>Neck Tension</td> <td>N</td> <td>4,170</td> <td>1169.180</td> <td>2,620</td> <td>1179.256</td> </tr> <tr> <td>Neck Compression</td> <td>N</td> <td>4,000</td> <td>-272.569</td> <td>2,520</td> <td>-654.774</td> </tr> <tr> <td>Left Femur Force</td> <td>N</td> <td>10,008</td> <td>-740.553</td> <td>6,805</td> <td>-769.442</td> </tr> <tr> <td>Right Femur Force</td> <td>N</td> <td>10,008</td> <td>-2013.306</td> <td>6,805</td> <td>-219.733</td> </tr> </tbody> </table>						Measurement Description	Units	Driver ATD (Serial No. 142)		Passenger ATD (Serial No. 139)		Threshold	Result	Threshold	Result	Head Injury Criteria (HIC <sub>15</sub> )		700	169.562	700	266.853	Maximum Chest Compression	mm	63	-26.588	52	-25.007	Nij		1	0.285	1	0.465	Neck Tension	N	4,170	1169.180	2,620	1179.256	Neck Compression	N	4,000	-272.569	2,520	-654.774	Left Femur Force	N	10,008	-740.553	6,805	-769.442	Right Femur Force	N	10,008	-2013.306	6,805	-219.733
Measurement Description	Units	Driver ATD (Serial No. 142)		Passenger ATD (Serial No. 139)																																																					
		Threshold	Result	Threshold	Result																																																				
Head Injury Criteria (HIC <sub>15</sub> )		700	169.562	700	266.853																																																				
Maximum Chest Compression	mm	63	-26.588	52	-25.007																																																				
Nij		1	0.285	1	0.465																																																				
Neck Tension	N	4,170	1169.180	2,620	1179.256																																																				
Neck Compression	N	4,000	-272.569	2,520	-654.774																																																				
Left Femur Force	N	10,008	-740.553	6,805	-769.442																																																				
Right Femur Force	N	10,008	-2013.306	6,805	-219.733																																																				
<b>17. Key Words</b> 56.3 km/h (35 mph) Full Frontal Rigid Barrier Impact Test New Car Assessment Program (NCAP)				<b>18. Distribution Statement</b> Copies of this report are available from: National Highway Traffic Safety Administration Technical Information Services Division 1200 New Jersey Ave, S Washington, DC 20590																																																					
<b>19. Security Class. (of this report)</b>  UNCLASSIFIED		<b>20. Security Class. (of this page)</b>  UNCLASSIFIED		<b>21. No. of Pages</b>  168	<b>22. Price</b>																																																				

## TABLE OF CONTENTS

<u>Section</u>		<u>Page</u>
1	Purpose and Summary of the Test	1-1
2	Occupant and Vehicle Information / Data Sheets	2-1
<u>Data Sheet</u>		<u>Page</u>
1	General Test and Vehicle Parameter Data	2-2
2	Seat Adjustment, Fuel System, and Steering Wheel Data	2-6
3	Dummy Longitudinal Clearance Dimensions	2-8
4	Dummy Lateral Clearance Dimensions	2-9
5	Seat Belt Positioning Data	2-10
6	High-Speed Camera Locations and Data	2-11
7	Vehicle Accelerometer Locations	2-13
8	Photographic Reference Target Locations	2-14
9	Load Cell Locations on Fixed Barrier	2-15
10	Test Vehicle Summary of Results	2-16
11	Post-Test Observations	2-17
12	Vehicle Profile Measurements	2-18
13	Accident Investigation Division Data	2-20
14	Vehicle Intrusion Measurements	2-21
15	Summary of Indicant FMVSS No.212 and FMVSS No.219 (Partial) Data	2-23
16	FMVSS 301 Barrier Impact & Static Rollover Results	2-25
17	Dummy/Vehicle Temperature Stabilization Chart	2-26
<u>Appendix</u>		<u>Page</u>
A	Photographs	A-1
B	Dummy Response Data Traces	B-1
C	Dummy Calibration and Performance Verification Data	C-1
D	Test Equipment and Instrumentation Calibration	D-1

## SECTION 1

### PURPOSE AND SUMMARY OF TEST

#### PURPOSE

This 56.3 km/h frontal barrier impact test is part of the Vehicle Barrier Impact Testing Program sponsored by the National Highway Traffic Safety Administration (NHTSA) under Contract No. 693JJ919D000005. The purpose of this test was to obtain vehicle crashworthiness and occupant restraint system performance data for consumer information purposes.

The 56.3 km/h frontal barrier impact test was conducted in accordance with the Office of Crashworthiness Standards Laboratory Procedure for NCAP Full Frontal Rigid Barrier Impact Testing.

#### SUMMARY

A load cell barrier consisting of 128 load cells was impacted by a 2020 Volkswagen Passat four door sedan at a velocity of 56.29 km/h. The test was performed at Calspan Corporation's Transportation Test Operations facility in Buffalo, New York on March 4, 2020. Pre- and post-test photographs of the vehicle and dummies to document the test can be found in Appendix A. One real-time camera and 16 high-speed cameras were used to document the frontal barrier impact event. Camera locations and other pertinent camera information can be found in Data Sheet 6 of this report.

One Part 572E, 50<sup>th</sup> percentile male anthropomorphic test device (ATD), was placed in the driver seating position and one Part 572O 5<sup>th</sup> percentile female ATD was placed in the right-front passenger seating position according to dummy placement instructions specified in the Laboratory Procedure for NCAP Full Frontal Rigid Barrier Impact Testing. Both ATDs were fully instrumented with head, chest and pelvis tri-axial accelerometers, chest displacement potentiometers, upper neck transducers, femur load cells, and lower leg instrumentation. Seat belt load cells were installed on the driver's and passenger's shoulder belts to measure dummy torso section loading. The driver (position 1) ATD (Serial No. 142) and the right-front passenger (position 2) ATD (Serial No. 139) were qualified prior to this test. Certification details, along with instrumentation calibration data, can be found in Appendix C of this report.

The 486 channels of data were recorded on an on-board data acquisition system. Appendix B contains the vehicle, load cell barrier and dummy response data traces.

There was 100 percent windshield retention and no intrusion into the protected zone of the windshield during the event. There was a total of 0.0 grams of stoddard solvent leakage after the event or during any phase of the static rollover. The maximum static crush of the vehicle was 593 mm and both driver and passenger side doors remained closed during the impact event and were operable after the impact.

The driver's visible contact points were as follows: The driver's head contacted the frontal airbag and then the head restraint. The upper torso contacted the frontal airbag. Both knees contacted the knee bolster.

The passenger's visible contact points were as follows: The passenger's head contacted the frontal airbag and then the head restraint. The upper torso contacted the frontal airbag. The left knees contacted the glove box.

The occupant data is summarized below.

ATD Position	HIC <sub>15</sub>	Nij	Neck Tension (N)	Neck Comp. (N)	3ms Chest Clip (Gs)	Chest Disp. (mm)	Left Femur (N)	Right Femur (N)
Driver (50 <sup>th</sup> )	169.562	0.285	1169.180	-272.569	43.382	-26.588	-740.553	-2013.306
Passenger (5 <sup>th</sup> )	266.853	0.465	1179.256	-654.774	62.115	-25.007	-769.442	-219.733

**GENERAL COMMENTS:**

1. P1 (Driver) serial number - 142
2. P2 (Passenger) serial number - 139

**Data Anomalies:**

- Engine Bottom X Acceleration, Exceeded calibration range at 34.6 ms, 38 ms, 41.1 ms

## **SECTION 2**

### **OCCUPANT AND VEHICLE INFORMATION / DATA SHEETS**

This section contains information reporting for the following Data Sheets:

Data Sheet No. 1 – General Test and Vehicle Parameter Data

Data Sheet No. 2 – Seat Adjustment, Fuel System, and Steering Wheel Data

Data Sheet No. 3 – Dummy Longitudinal Clearance Dimensions

Data Sheet No. 4 – Dummy Lateral Clearance Dimensions

Data Sheet No. 5 – Seat Belt Positioning Data

Data Sheet No. 6 – High-Speed Camera Locations and Data

Data Sheet No. 7 – Vehicle Accelerometer Locations

Data Sheet No. 8 – Photographic Reference Target Locations

Data Sheet No. 9 – Load Cell Locations on Fixed Barrier

Data Sheet No. 10 – Test Vehicle Summary of Results

Data Sheet No. 11 – Post-Test Observations

Data Sheet No. 12 – Vehicle Profile Measurements

Data Sheet No. 13 – Accident Investigation Division Data

Data Sheet No. 14 – Vehicle Intrusion Measurements

Data Sheet No. 15 – Summary of Indicant FMVSS No. 212 and FMVSS No. 219 (Partial)

Data Sheet No. 16 – FMVSS 301 Barrier Impact and Static Rollover Results

Data Sheet No. 17 – Dummy/Vehicle Temperature Stabilization Chart

**DATA SHEET NO. 1  
GENERAL TEST AND VEHICLE PARAMETER DATA**

Test Vehicle: 2020 Volkswagen Passat four door sedan  
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20205803  
 Test Date: 3/4/2020

**TEST VEHICLE INFORMATION AND OPTIONS**

NHTSA No.	M20205803	Traction Control System (TCS)	Yes
Model Year	2020	Power Steering	Yes
Make	Volkswagen	Power Window Auto-Reverse	No
Model	Passat	Driver Frontal Airbag	Yes
Body Style	Four Door Sedan	Driver Curtain Airbag	Yes
VIN	1VWAA7A30LC009669	Driver Head/Torso Airbag	No
Body Color	Silver	Driver Torso Airbag	No
Odometer Reading (km /mi)	11 miles	Driver Torso/Pelvis Airbag	Yes
Engine Displacement (L)	2.0	Driver Pelvis Airbag	No
Type / No. Cylinders	I4	Driver Knee Airbag	No
Engine Placement	Transverse	Front Pass. Frontal Airbag	Yes
Transmission Type	Automatic	Front Pass. Curtain Airbag	Yes
Transmission Speeds	6-Speed	Front Pass. Head/Torso Airbag	No
Overdrive	Yes	Front Pass. Torso Airbag	No
Final Drive	Front Wheel Drive	Front Pass. Torso/Pelvis Airbag	Yes
Roof Rack	No	Front Pass. Pelvis Airbag	No
Sunroof / T-Top	No	Front Pass. Knee Airbag	No
Running Boards	No	Driver Pretensioner	Yes
Tilt Steering Wheel	Yes	Driver Load Limiter	Yes
Power Seats	No	Front Pass. Pretensioner	Yes
Anti-Lock Brakes (ABS)	Yes	Front Pass. Load Limiter	Yes
Automatic Door Locks (ADLs)	Yes	Other –	-

Does owner's manual provide instructions to turn off automatic door locks?

No

**DATA FROM CERTIFICATION LABEL**

Manufactured By	Volkswagen Group of America	GVWR (kg)	2010
Date of Manufacture	01/2020	GAWR Front (kg)	1060
		GAWR Rear (kg)	1000

**VEHICLE SEATING AND WEIGHT CAPACITY DATA**

Measured Parameter	Front	Rear	Third	Total
Type of Seats	Bucket	Bench	N/A	
Number of Occupants	2	3	N/A	5
Capacity Wt. (VCW) (kg)				420
Cargo Wt. (RCLW) (kg)				79.8




**DATA SHEET NO. 1 ... (CONTINUED)**  
**GENERAL TEST AND VEHICLE PARAMETER DATA**

Test Vehicle: 2020 Volkswagen Passat four door sedan  
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20205803  
 Test Date: 3/4/2020

Collect items circled in red, tire manufacturer, and tire name.

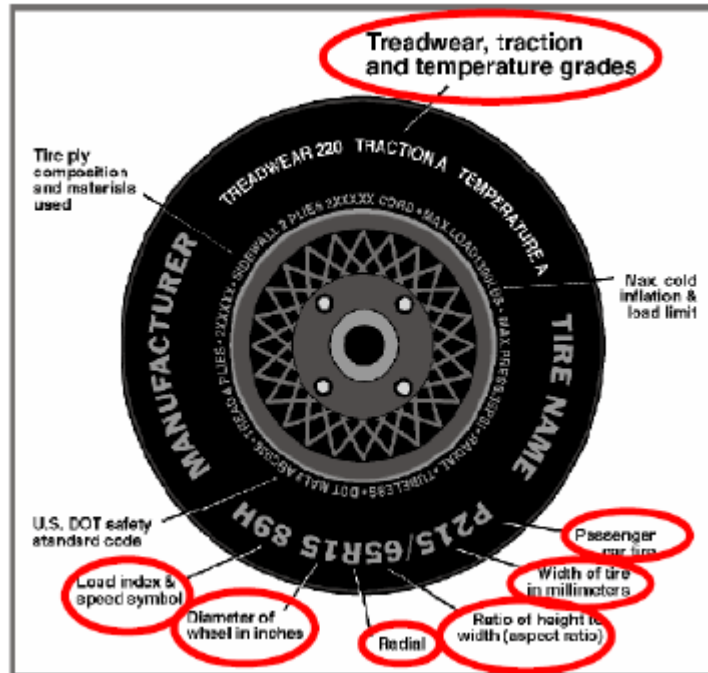

**VEHICLE TIRE INFORMATION**

Measured Parameter	Front	Rear
Maximum Tire Pressure (kPa)	350	350
Cold Pressure (kPa)	240	240
Recommended Tire Size	215/55R17	215/55R17
Tire Size on Vehicle	215/55R17	215/55R17
Tire Manufacturer	Continental	Continental
Tire Model	ProContact	ProContact
Treadwear	500	500
Traction	A	A
Temperature Grades	A	A
Tire Plies Sidewall	1 Polyester	1 Polyester
Tire Plies Body	1 Polyester, 2 Steel, 1 Polyamide	1 Polyester, 2 Steel, 1 Polyamide
Load Index / Speed Symbol	94H	94H
Tire Material	Rubber	Rubber
DOT Safety Code Left	VY3RWCRK	VY3RWCRK
DOT Safety Code Right	VY3RWCRK	VY3RWCRK

**DATA SHEET NO. 1 ... (CONTINUED)**  
**GENERAL TEST AND VEHICLE PARAMETER DATA**

Test Vehicle: 2020 Volkswagen Passat four door sedan  
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20205803  
 Test Date: 3/4/2020

**TEST VEHICLE WEIGHTS**

	Units	As Delivered Weights (UVW)			As Tested Weights (ATW)		
		Front Axle	Rear Axle	Total	Front Axle	Rear Axle	Total
Left	kg	437	315		472	394	
Right	kg	454	297		482	370	
Ratio	%	59.3	40.7		55.5	44.5	
Totals	kg	891	612	1503	954	764	1718

**TARGET TEST WEIGHT CALCULATION**

Measured Parameter	Units	Value	
Total Delivered Weight (UVW)	kg	1503	(A)
Weight of 1 P572E ATD & 1 P572O ATD	kg	142	(B)
Rated Cargo / Luggage Weight (RCLW)	kg	79.8	(C)
Calculated Vehicle Target Weight (TVTW)	kg	1724.8	(A+B+C)

**TEST VEHICLE ATTITUDES AND CG**

Condition	Units	LF	RF	LR	RR	CG (aft of front axle)
As Delivered	mm	728	726	739	741	1141
As Tested	mm	713	713	687	688	1246
Post-Test	mm	682	667	686	672	

**GENERAL TEST VEHICLE DATA**

Measurement Description	Units	Value
Total Vehicle Wheel Base	mm	2802
Total Vehicle Length at Left Side	mm	4827
Total Vehicle Length at Centerline	mm	4919
Total Vehicle Length at Right Side	mm	4827
Weight of Ballast in Cargo Area	kg	41
Weight of Vehicle Components Removed	kg	25
Amount of Stoddard Solvent in Fuel Tank	L	65.1

**LIST OF COMPONENTS REMOVED TO MEET TEST WEIGHT:**

Trunk Carpeting, Spare Tire, Jack

---



---



---

**DATA SHEET NO.1 ... (CONTINUED)**  
**GENERAL TEST AND VEHICLE PARAMETER DATA**

Test Vehicle: 2020 Volkswagen Passat four door sedan  
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20205803  
 Test Date: 3/4/2020

**TARGET VEHICLE STRUCTURAL MEASUREMENT**

No.	Description	Pre-Test
1	Total Length	4919
2	Total Width	1792
3*	Bumper Top Height	514
4*	Bumper Bottom Height	379
5*	Longitudinal Member Top Height	526
6	Distance Between Longitudinal Members	1079
7	Longitudinal Member Width	98
8*	Engine Top Height	771
9*	Engine Bottom Height	405
10	Engine and Gearbox Width	467
11	Front Bumper-Engine Distance	742
12*	Front Shock Absorber Fixing Height	899
13*	Bonnet Leading Edge Height	766
14	Front Shock Absorber Fixing Width	1166
15	Front Bumper – Front Axle Distance	964
16	Front Axle – A Pillar Distance	526
17	A-Pillar – B-Pillar Distance	1095
18	B-Pillar – Rear Axle Distance	1180
19	B-Pillar – C-Pillar Distance	1244
20*	Roof Sill Bottom Height	1354
21*	Roof Sill Top Height	1400
22*	Floor Sill Bottom Height	315
23*	Floor Sill Top Height	368

\*Height Measurements are taken from the ground  
 Note: All measurements are in millimeters


**DATA SHEET NO. 2**  
**SEAT ADJUSTMENT, FUEL SYSTEM, AND STEERING WHEEL DATA**

Test Vehicle: 2020 Volkswagen Passat four door sedan  
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20205803  
 Test Date: 3/4/2020

**NOMINAL DESIGN RIDING POSITION**

The driver's seat back was set to the manufacturer's designated angle. The passenger's seat back was positioned in a similar manner as the driver's seat back. Seat back angles are measured at the headrest post bezel using a digital inclinometer.

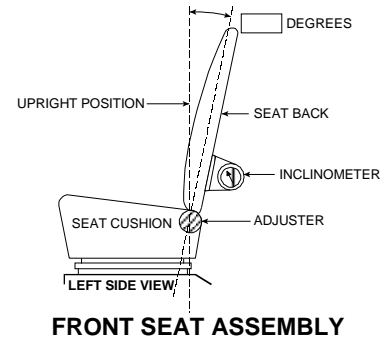

Seating Position	Degrees
Driver Seat Back Angle	1.6
Passenger Seat Back Angle	5.9

**SEAT FORE / AFT POSITIONS**


The driver's seat was positioned at the mid-point of fore/aft travel at its lowest position. The passenger's seat was positioned at the most forward position of fore/aft travel. Zero is defined as the forward most position.

Seating Position	Total Fore / Aft Travel	Placed in Position #
Driver Seat	38 (0-37)	15
Passenger Seat	26 (0-25)	0

**SEAT BELT UPPER ANCHORAGE**

The driver's seat belt anchorage was positioned according to the manufacturer's designated positioning for a 50<sup>th</sup> percentile adult male ATD. The passenger's seat belt anchorage was positioned according to the manufacturer's designated positioning for a 5<sup>th</sup> percentile adult female ATD. For this test zero is defined as the uppermost position.

Seating Position	Total # of Positions	Placed in Position #
Driver Seat	4 (0-3)	0
Passenger Seat	4 (0-3)	0

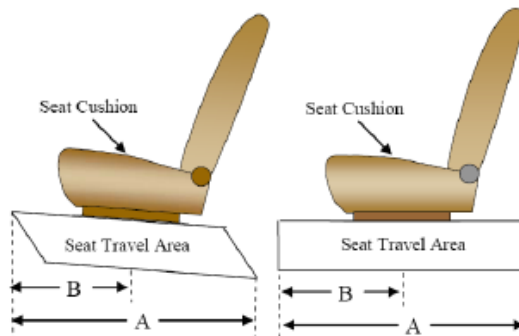

**DATA SHEET NO. 2 ... (CONTINUED)**  
**SEAT ADJUSTMENT, FUEL SYSTEM, AND STEERING WHEEL DATA**

Test Vehicle: 2020 Volkswagen Passat four door sedan  
 Test Program: NCAP Frontal Barrier Impact Test


NHTSA No.: M20205803  
 Test Date: 3/4/2020

**FUEL TANK CAPACITY**

Description	Liters
Usable Capacity of "Standard Tank"	70
Usable Capacity of "Optional Tank"	N/A
92%-94% of Usable Capacity	64.4 - 65.8
Actual Amount of Solvent Used	65.1
1/3 of Usable Capacity	23.3


**FUEL PUMP**

The vehicle is equipped with an electric fuel pump. The fuel filler neck is on the right side of the vehicle. The pump creates positive pressure in the fuel lines, pushing the gasoline to the engine. See form 1 for more information.

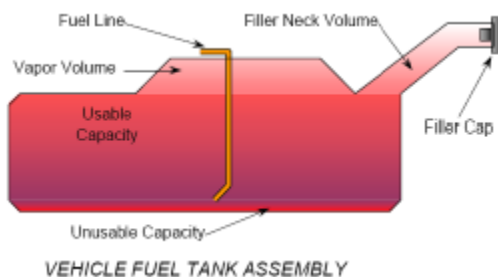

**STEERING COLUMN ADJUSTMENT**

Steering wheel and column adjustments are made so that the steering wheel hub is at the geometric center of the locus it describes when moved through its full range of motion. For angular measurements, a digital inclinometer was used to measure a plate which was placed across the steering wheel rim. A tape measure was used to measure the telescoping steering wheel travel.

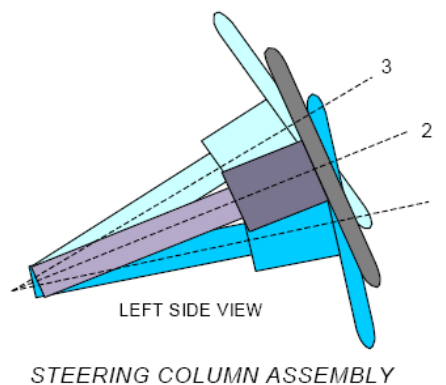


**STEERING COLUMN POSITIONS**

Description	Degrees	Fore / Aft Position (mm)
Lowermost position No. 1	22.2	
Geometric center position No. 2	24.4	
Uppermost position No. 3	27.2	
Telescoping Steering Wheel Travel		55
Test Position	24.7	22.5

**DATA SHEET NO. 3  
DUMMY LONGITUDINAL CLEARANCE DIMENSIONS**

Test Vehicle: 2020 Volkswagen Passat four door sedan  
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20205803  
 Test Date: 3/4/2020

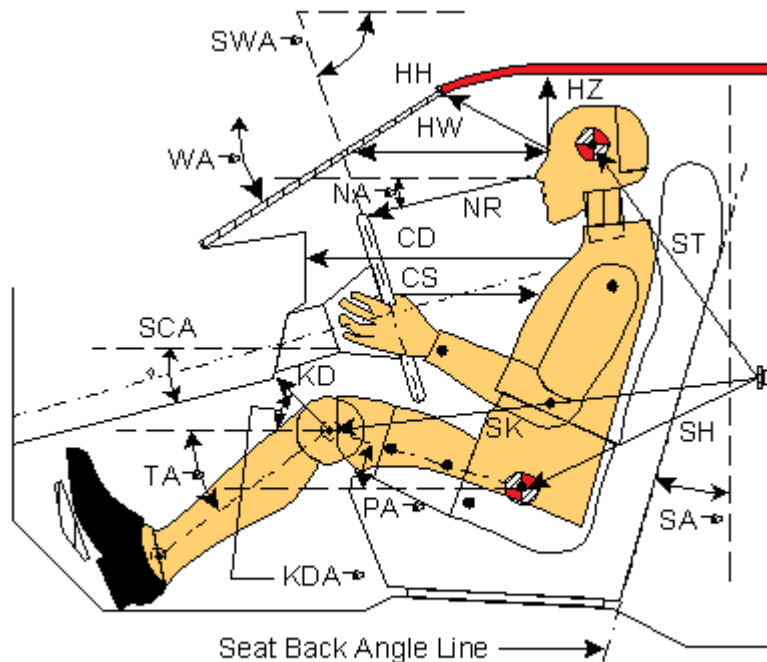


**Left Side View**

Code	Measurement Description	Driver (SN: 142)		Passenger (SN: 139)	
		Length (mm)	Angle (°)	Length (mm)	Angle (°)
<b>WA°</b>	Windshield Angle		27.2		
<b>SWA°</b>	Steering Wheel Angle		23.5		
<b>SCA°</b>	Steering Column Angle		66.4		
<b>SA°</b>	Seat Back Angle (on headrest post)		1.6		5.9
<b>HZ</b>	Head to Roof (Z)	180	90	241	90
<b>HH</b>	Head to Header	348	28.2	371	40.1
<b>HW</b>	Head to Windshield	671	0	712	0
<b>NR</b>	Nose to Rim / Dash	410	4.2	470	11.2
<b>CD</b>	Chest to Dash	550		446	
<b>CS</b>	Chest to Steering Hub	343	3.7		
<b>RA</b>	Rim to Abdomen	232	0		
<b>KDL</b>	Left Knee to Dash	213	25.1	174	37.1
<b>KDR</b>	Right Knee to Dash	212	23.9	171	37.3
<b>PA°</b>	Pelvic Angle		24.1		20.5
<b>TA°</b>	Tibia Angle		26.7		38.6
<b>SK</b>	Striker to Knee	594	11.5	655	11.2
<b>ST</b>	Striker to Head	457	72.3	388	62.3
<b>SH</b>	Striker to H-Point	289	48.1	384	33.8

**DATA SHEET NO. 4**  
**DUMMY LATERAL CLEARANCE DIMENSIONS**

Test Vehicle: 2020 Volkswagen Passat four door sedan  
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20205803  
 Test Date: 3/4/2020

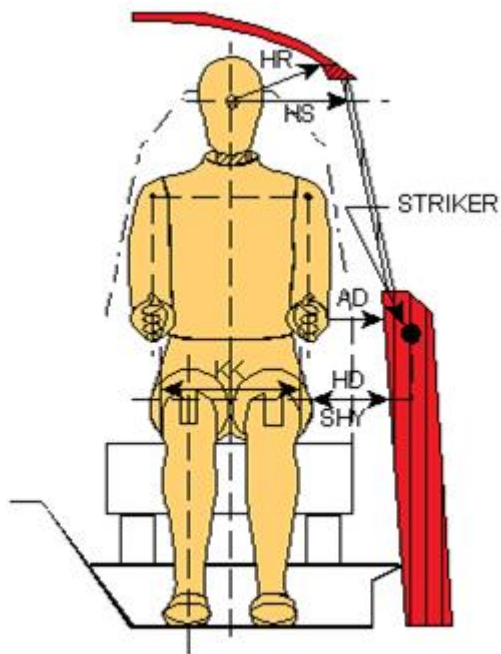


Front View

Code	Description	Driver (mm)	Passenger (mm)
AD	Arm to Door	160	98
HD	H-Point to Door	153	185
HR	Head to Side Header	208	263
HS	Head to Side Window	349	383
KK	Knee to Knee	345	210
SHY	Striker to H-Point (Y Direction)	250	260
AA	Ankle to Ankle	375	165

**DATA SHEET NO. 5  
SEAT BELT POSITIONING DATA**

Test Vehicle: 2020 Volkswagen Passat four door sedan  
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20205803  
 Test Date: 3/4/2020

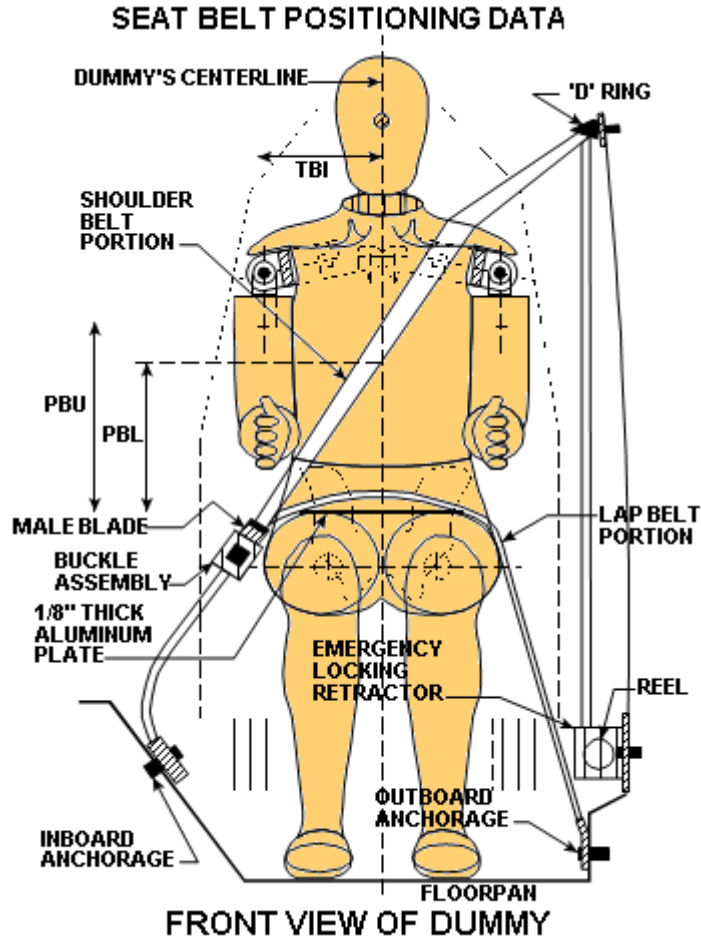

**SEAT BELT POSITIONING MEASUREMENTS**

Measurement Description	Units	Driver	Passenger
<b>PBU</b> — Top surface of reference to belt upper edge	mm	310	290
<b>PBL</b> — Top surface of reference to belt lower edge	mm	230	210

**BELT LENGTH DATA**

Measurement Description	Units	Driver	Passenger
Shoulder belt length as measured on ATD	mm	870	870
Lap Belt Length as measured on ATD	mm	675	680
Remainder of belt on reel	mm	1095	1150
Total belt length for continuous webbing systems	mm	2640	2700




**DATA SHEET NO. 6  
HIGH-SPEED CAMERA LOCATIONS AND DATA**

Test Vehicle: 2020 Volkswagen Passat four door sedan  
Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20205803  
Test Date: 3/4/2020

**CAMERA POSITIONS FOR FRONTAL IMPACTS**

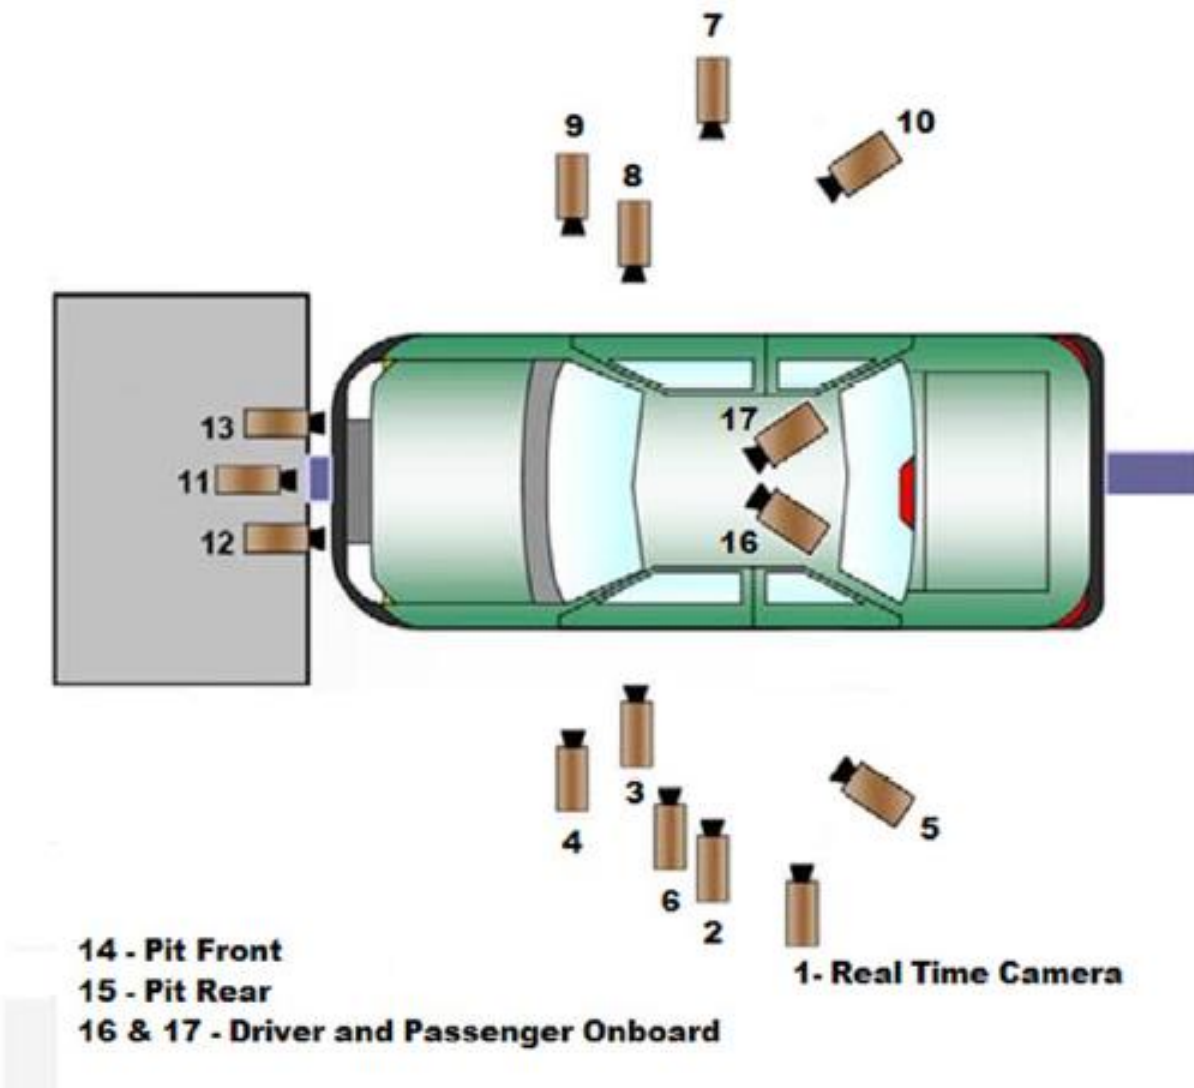

**DATA SHEET NO. 6 ... (CONTINUED)**  
**HIGH-SPEED CAMERA LOCATIONS AND DATA**

Test Vehicle: 2020 Volkswagen Passat four door sedan  
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20205803  
 Test Date: 3/4/2020

**CAMERA LOCATIONS**


No.	Camera View	Location (mm)			Lens (mm)	Speed (fps)
		X	Y	Z		
1	Real-Time Left Overall	-	-	-		60
2	Left Overall	-2384	-7784	-1286	24	1000
3	Driver Close-Up	-1628	-7209	-1437	50	1000
4	Left Front Half	-789	-6394	-1134	28	1000
5	Left Angle	-4186	-5149	-2710	50	1000
6	Steering Column	-1610	-7427	-1838	50	1000
7	Right Overall	-2157	8033	-1257	24	1000
8	Passenger Close-Up	-1601	10115	-1432	75	1000
9	Right Front Half	-712	11256	-1313	50	1000
10	Right Angle	-4048	4995	-2613	50	1000
11	Windshield	1235	0	-2350	25	1000
12	Driver Windshield	750	-700	-2350	25	1000
13	Passenger Windshield	750	700	-2350	25	1000
14	Pit Front	-655	0	2297	12.5	1000
15	Pit Rear	-2208	0	2297	12.5	1000
16	Onboard Driver Airbag (Optional)				8	1000
17	Onboard Passenger Airbag (Optional)				8	1000

\* COORDINATES:      +X = forward of impact plane  
                              +Y = right of monorail center  
                              +Z = into ground

**DATA SHEET NO. 7**  
**VEHICLE ACCELEROMETER LOCATIONS**

Test Vehicle: 2020 Volkswagen Passat four door sedan  
Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20205803  
Test Date: 3/4/2020

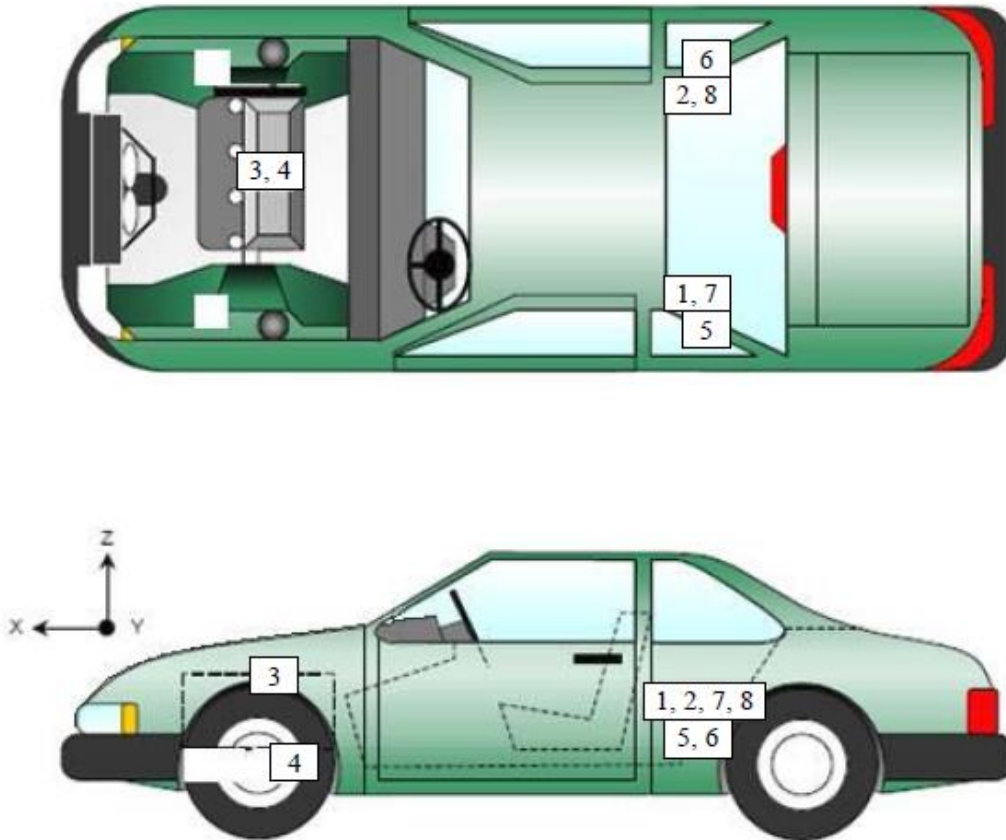

**VEHICLE ACCELEROMETER PRE-TEST LOCATIONS**

No.	Accelerometer Location	Measurements (mm)		
		X	Y	Z
1	Left Rear Accelerometer – X Direction	2060	-270	139
2	Right Rear Accelerometer – X Direction	2058	322	137
3	Engine Top X	4061	85	-331
4	Engine Bottom X	3811	245	59
5	Left Rear Accelerometer – Z Direction	2060	-270	139
6	Right Rear Accelerometer – Z Direction	2058	322	137
7	Left Rear Accelerometer – X Direction Redundant	2060	-270	139
8	Right Rear Accelerometer – X Direction Redundant	2057	322	137

Reference Points:     *X – Rear Surface of Vehicle (+ forward)*  
                              *Y – Vehicle Centerline (+ to right)*  
                              *Z – Ground Plane (+ down)*




**DATA SHEET NO. 8**  
**PHOTOGRAPHIC REFERENCE TARGET LOCATIONS**

Test Vehicle: 2020 Volkswagen Passat four door sedan  
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20205803  
 Test Date: 3/4/2020

Item	Value
A	362
B	896
C	2678
D	612
E	1628
F	195
G	1749
H	1030
I	1404
J	957
K	958
L	1600
M	1029
N	1599
O	958
P	957
Q	1404

All units in millimeters

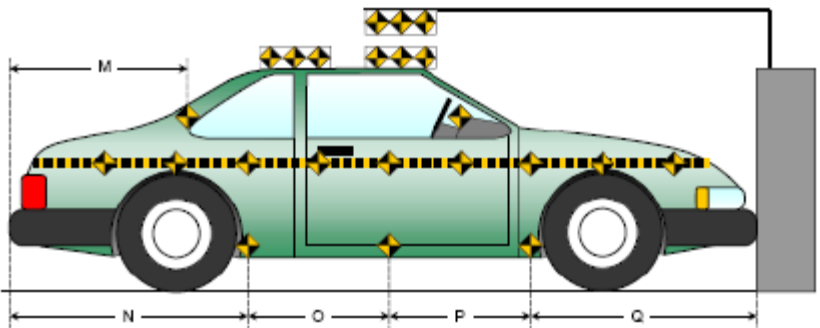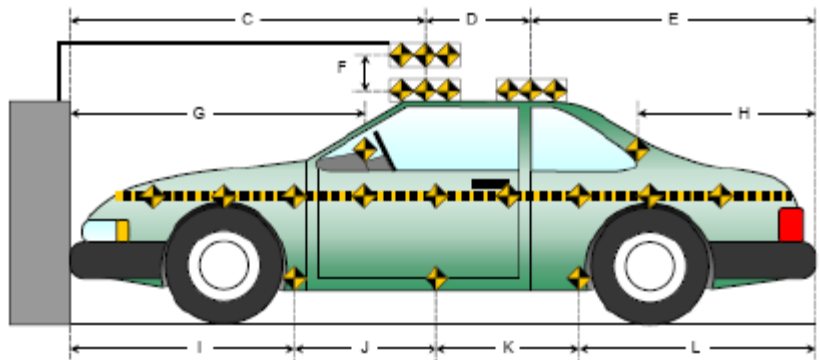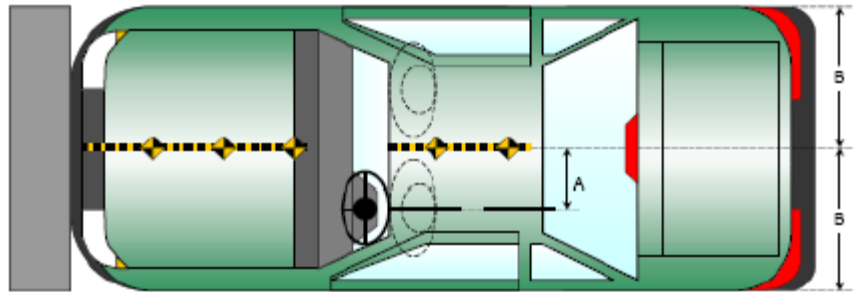

**DATA SHEET NO. 9**  
**LOAD CELL LOCATIONS ON FIXED BARRIER**

Test Vehicle: 2020 Volkswagen Passat four door sedan  
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20205803  
 Test Date: 3/4/2020

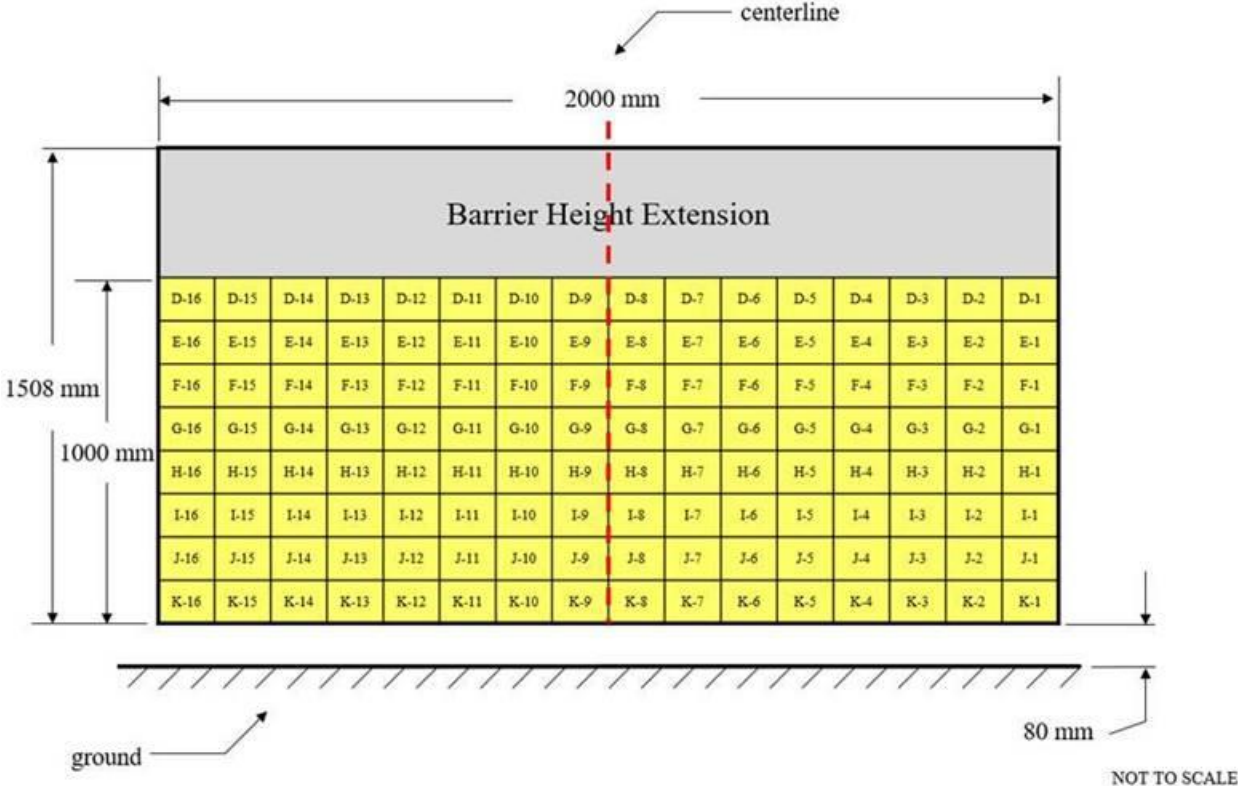


Figure 1 - Load Cell Locations on a 128-Load Cell Barrier with Plywood Height Extension\*  
 Please note above diagram is not actual representation of load cell barrier used.

**DATA SHEET NO. 10**  
**TEST VEHICLE SUMMARY OF RESULTS**

Test Vehicle: 2020 Volkswagen Passat four door sedan  
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20205803  
 Test Date: 3/4/2020

**INSTRUMENTATION**

Instrumentation	Number of Channels Collected
Driver Dummy Accelerometers	47
Passenger Dummy Accelerometers	47
Vehicle Structure Accelerometers	8
Load Cell Barrier	384
<b>Total</b>	<b>486</b>

**CAMERA COVERAGE**

Type of Camera	Number Used in this Test
High-Speed Vehicle Onboard	2
High-Speed Offboard	14
Real-Time Panning	1
<b>Total</b>	<b>17</b>

**DATA SHEET NO. 11  
POST-TEST OBSERVATIONS**

Test Vehicle: 2020 Volkswagen Passat four door sedan  
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20205803  
 Test Date: 3/4/2020

**TEST DUMMY INFORMATION AND CONTACT LOCATIONS**

Description	Driver	Passenger
Dummy Type / Serial No.	P572E 50 <sup>th</sup> Male / 142	P5720 5 <sup>th</sup> Female / 139
Head Contact	Frontal Airbag & Head Rest	Frontal Airbag & Head Rest
Upper Torso Contact	Frontal Airbag	Frontal Airbag
Lower Torso Contact	None	None
Left Knee Contact	Knee Bolster	Glove Box
Right Knee Contact	Knee Bolster	None

**DOOR OPENING AND SEAT TRACK INFORMATION**

Description	Driver	Passenger	Other
Locked / Unlocked Doors	Unlocked	Unlocked	
Front Door Opening	Closed	Closed	
Rear Door Opening	Closed & Operational	Closed & Operational	
Trunk/Hatch/Tailgate Opening			Closed
Seat Track Shift (mm)	None	None	
Seat Back Movement from Initial Position	None	None	

**POST-TEST STRUCTURAL OBSERVATIONS**

Critical Areas of Performance	Observations and Conclusions
Windshield Damage	Minor Cracks Along Passenger Side
Window Damage	None
Other	None

**VEHICLE REBOUND FROM BARRIER**

Measured Parameter	Units	Value
Left Side	mm	1222
Center	mm	1225
Right Side	mm	1230
Average	mm	1226


**SUPPLEMENTAL RESTRAINT SYSTEM INFORMATION**

Restraint Type	Driver		Passenger	
	Installed	Deployed	Installed	Deployed
Front Airbag	Yes	Yes	Yes	Yes
Side Airbag 1 - Curtain	Yes	Yes	Yes	Yes
Side Airbag 2 - Torso/Pelvis Airbag	Yes	No	Yes	No
Knee Airbag	No	N/A	No	N/A
Seat Belt Pretensioner	Yes	Yes	Yes	Yes
Seat Belt Load Limiter	Yes	Yes	Yes	Yes
Other				

**DATA SHEET NO. 12**  
**VEHICLE PROFILE MEASUREMENTS**

Test Vehicle: 2020 Volkswagen Passat four door sedan  
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20205803  
 Test Date: 3/4/2020

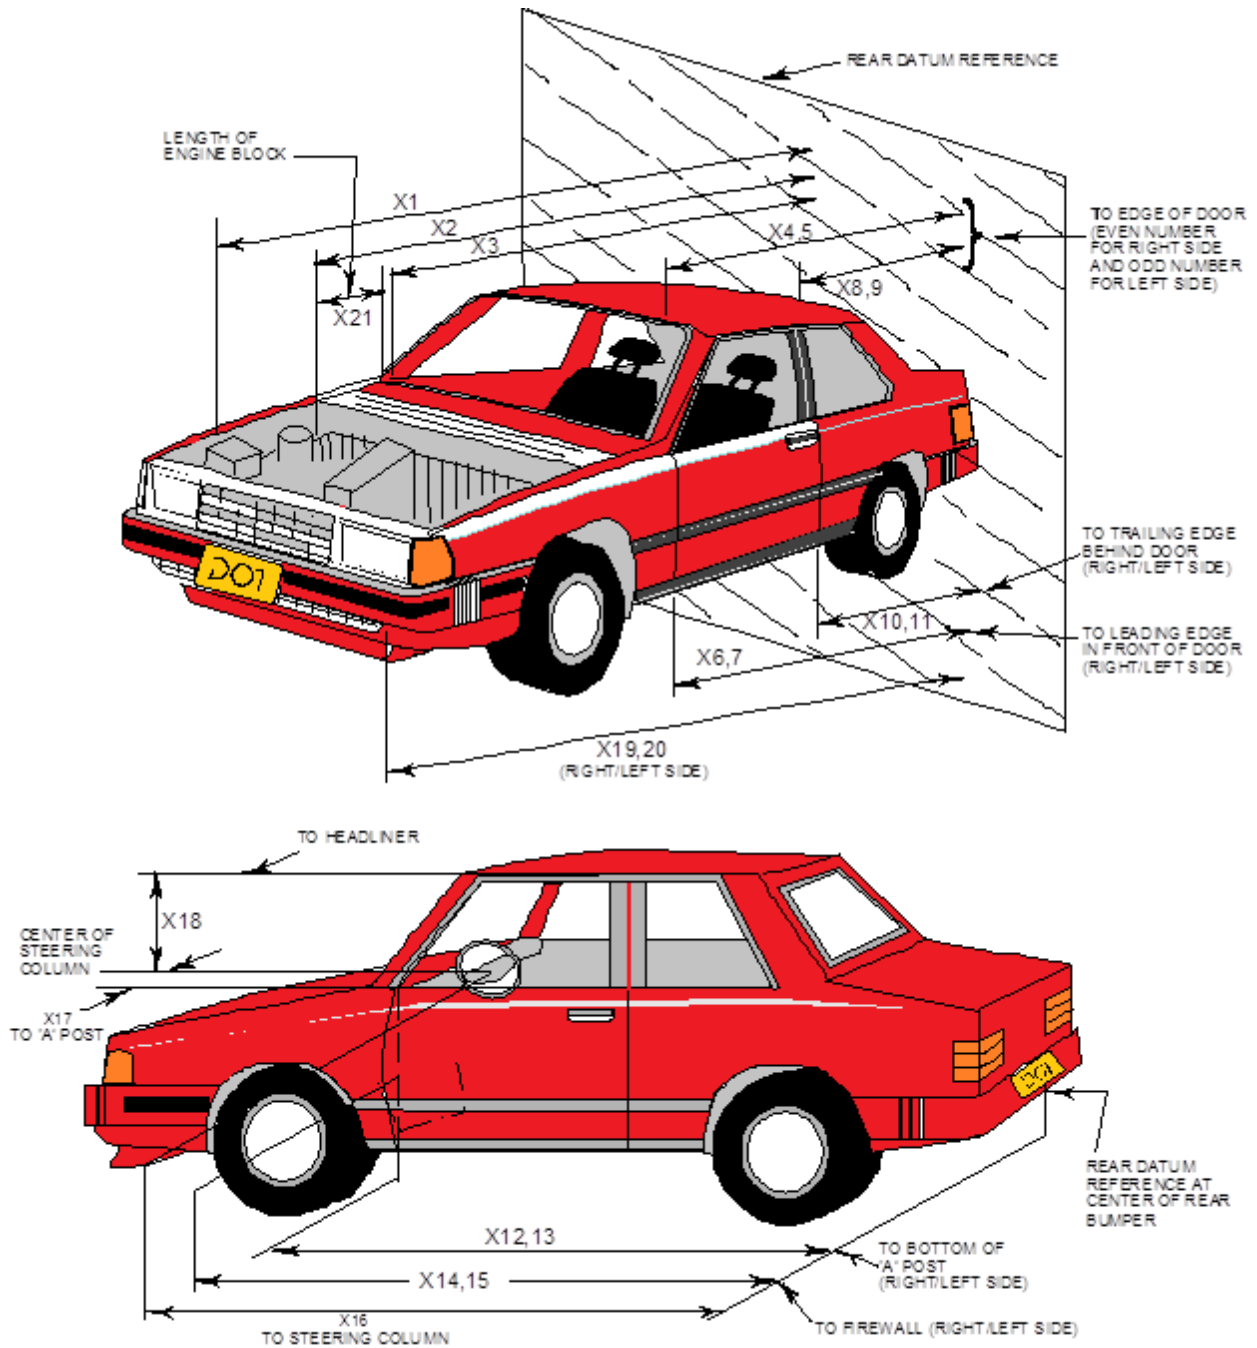



**DATA SHEET NO. 12 ... (CONTINUED)  
VEHICLE PROFILE MEASUREMENTS**

Test Vehicle: 2020 Volkswagen Passat four door sedan  
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20205803  
 Test Date: 3/4/2020

No.	Measurement Description	Pre-Test	Post-Test	Difference
1	Total Length of Vehicle at Centerline	4919	4337	-582
2	Rear Surface of Vehicle (RSOV) to Front of Engine	4176	4082	-94
3	RSOV to Firewall	3842	3835	-7
4	RSOV to Upper Leading Edge of Right Door	3460	3458	-2
5	RSOV to Upper Leading Edge of Left Door	3459	3459	0
6	RSOV to Lower Leading Edge of Right Door	3474	3471	-3
7	RSOV to Lower Leading Edge of Left Door	3476	3475	-1
8	RSOV to Upper Trailing Edge of Right Door	2344	2343	-1
9	RSOV to Upper Trailing Edge of Left Door	2344	2342	-2
10	RSOV to Lower Trailing Edge of Right Door	2381	2376	-5
11	RSOV to Lower Trailing Edge of Left Door	2381	2379	-2
12	RSOV to Bottom of "A" Post of Right Side	3460	3460	0
13	RSOV to Bottom of "A" Post of Left Side	3462	3460	-2
14	RSOV to Firewall, Right Side	3860	3822	-38
15	RSOV to Firewall, Left Side	3885	3812	-73
16	RSOV to Steering Column	3021	3054	33
17	Center of Steering Column to "A" Post	329	322	-7
18	Center of Steering Column to Headliner	386	402	16
19	RSOV to Right Side of Front Bumper	4864	4411	-453
20	RSOV to Left Side of Front Bumper	4865	4319	-546
21	Length of Engine Block	314	314	0
RD	RSOV to Right Side of Dash Panel	3130	3119	-11
CD	RSOV to Center of Dash Panel	3190	3181	-9
LD	RSOV to Left Side of Dash Panel	3166	3163	-3

All Dimensions in mm

**DATA SHEET NO. 13**  
**ACCIDENT INVESTIGATION DIVISION DATA**

Test Vehicle: 2020 Volkswagen Passat four door sedan  
Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20205803  
Test Date: 3/4/2020


**VEHICLE INFORMATION**

VIN: 1VWAA7A30LC009669  
Vehicle Size Category: Passenger Car

Wheelbase (mm): 2802  
Test Weight (kg): 1718

**ACCELEROMETER DATA**

Accelerometer Locations: Please See Data Sheet No. 7  
Cal. Procedure / Interval: Calspan Procedure / 6 month  
Integration Algorithm: Trapezoidal  
Linearity: > 99%  
Impact Velocity (km/h): 56.29  
Velocity Change (km/h): 64.09  
Time of Separation (ms): 140

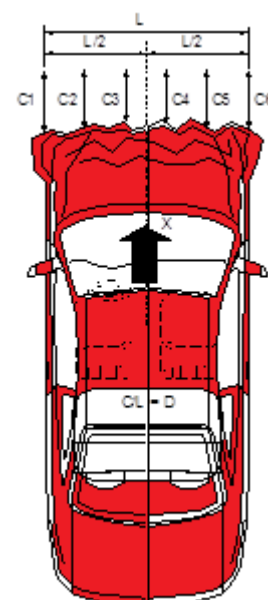

**CRUSH PROFILE**

Collision Deformation Classification: 12FDEW3  
Midpoint of Damage: C3  
Damage Region Length (mm): 1352  
Impact Mode: Frontal

No.	Measurement Description	Units	Pre-Test	Post-Test	Difference
C1	Crush Zone 1 at Left Side	mm	4729	4329	400
C2	Crush Zone 2 at Left Side	mm	4891	4332	559
C3	Crush Zone 3 at Left Side	mm	4916	4323	593
C4	Crush Zone 4 at Right Side	mm	4916	4336	580
C5	Crush Zone 5 at Right Side	mm	4890	4428	462
C6	Crush Zone 6 at Right Side	mm	4725	4351	374
L	C1 to C6	mm	1352	1363	-11

**DATA SHEET NO. 14  
VEHICLE INTRUSION MEASUREMENTS**

Test Vehicle: 2020 Volkswagen Passat four door sedan  
 Test Program: NCAP Frontal Barrier Impact Test


NHTSA No.: M20205803  
 Test Date: 3/4/2020

**DOOR OPENING WIDTH**

Item	Description	Units	Pre-Test	Post-Test	Difference
A	Left Side Upper	mm	1006	1005	-1
B	Left Side Lower	mm	873	873	0
D	Right Side Upper	mm	1003	1002	-1
E	Right Side Lower	mm	867	867	0

**WHEELBASE MEASUREMENTS**

Item	Description	Units	Pre-Test	Post-Test	Difference
C	Left Side Wheelbase	mm	2802	2785	-17
F	Right Side Wheelbase	mm	2802	2791	-11

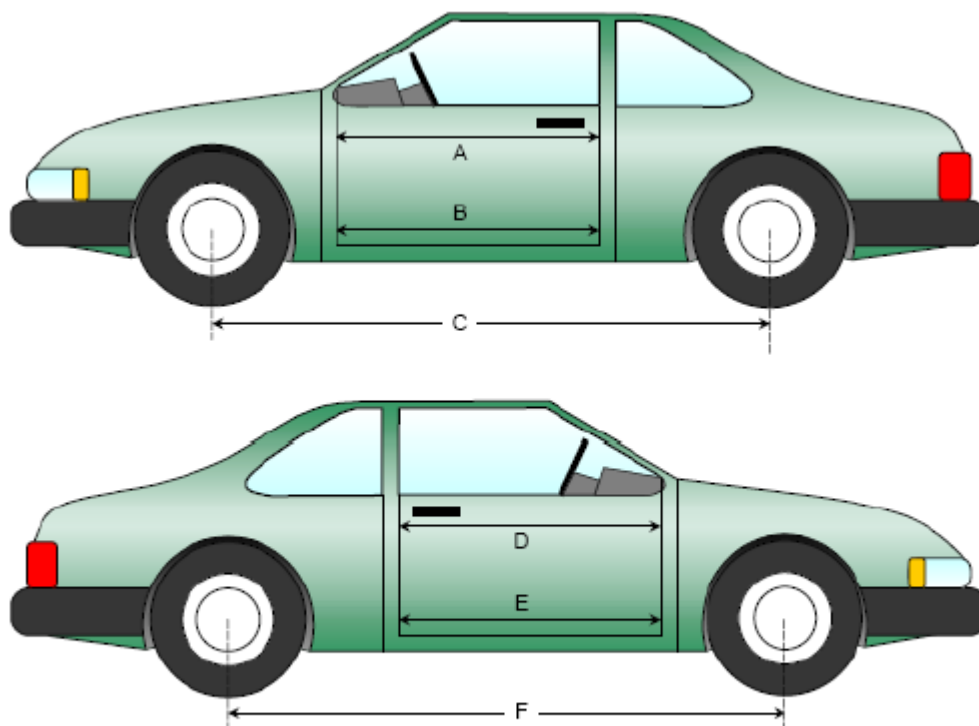

**Left & Right Side Views**

**DATA SHEET NO.14 ... (CONTINUED)  
VEHICLE INTRUSION MEASUREMENTS**


Test Vehicle: 2020 Volkswagen Passat four door sedan  
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20205803  
 Test Date: 3/4/2020

**DRIVER COMPARTMENT INTRUSION**

Item	Description	Units	Pre-Test	Post-Test	Difference
AB	Door Opening (Inside Window Jam)	mm	822	826	4
CX	Left Knee Bolster to X	mm	309	317	8
DX	Right Knee Bolster to X	mm	306	308	2
EX	Brake Pedal to X	mm	568	573	5
FX	Foot Rest to X	mm	579	576	-3
GX	Center of Steering Column Wheel Hub to X	mm	87	122	35

*X = Front of Seat Track (Stationary)*

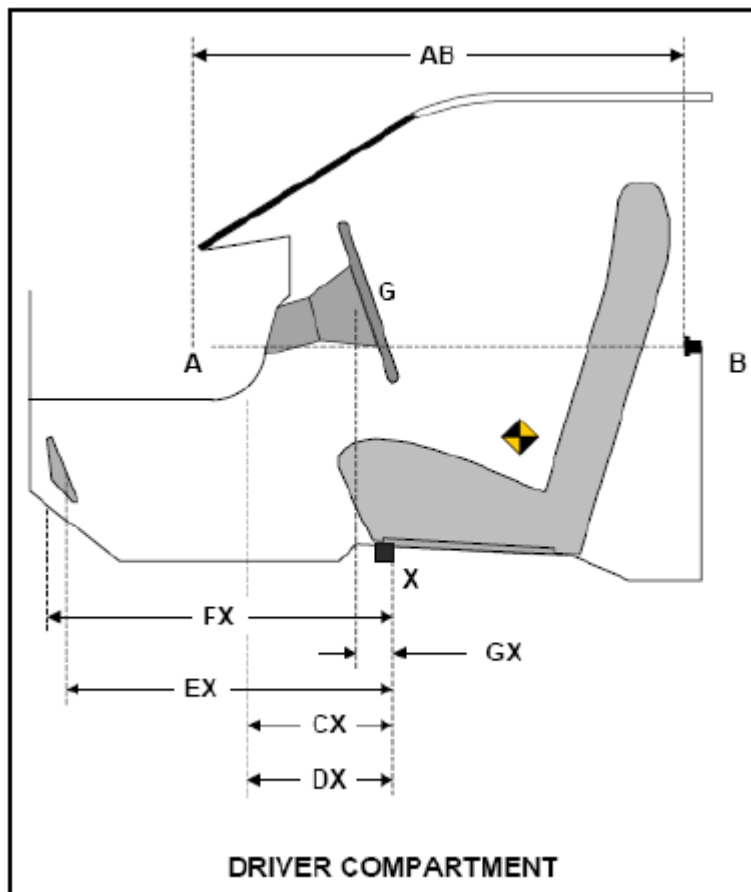

**DATA SHEET NO. 15**  
**SUMMARY OF FMVSS 212, 219 (PARTIAL), AND 301 DATA**

Test Vehicle: 2020 Volkswagen Passat four door sedan  
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20205803  
 Test Date: 3/4/2020


**Windshield Mounting Details:** A 0.8 mm trim surrounds the top and side of windshield while a plastic shroud is on the bottom.

*The standard requires that the post-test retention measurement be a minimum of 75% of the pre-test total periphery measurement for vehicles not equipped with occupant passive restraints and 50% for each side of the windshield for vehicles which are equipped with occupant passive restraints.*

Temperature of windshield molding during test: 21° C

**WINDSHIELD PERIPHERY MEASUREMENTS**

Measurement	Pre-Test (mm)	Post-Test (mm)	% Retention
Left Side	1634.5	1634.5	100%
Right Side	1634.5	1634.5	100%
Total	3269	3269	100%

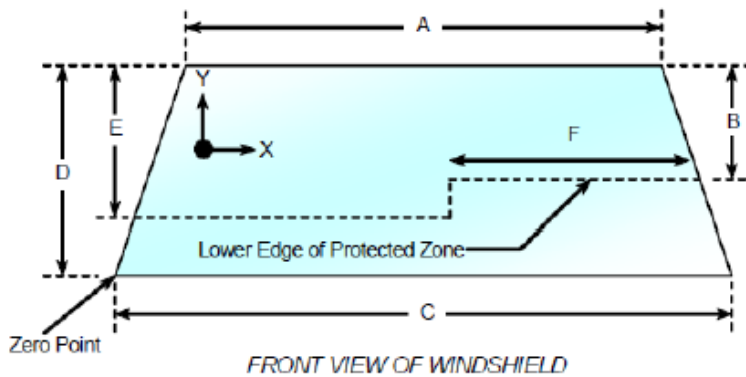

Item	Units	Value
A	mm	1250
B	mm	421
C	mm	675
D	mm	672
E	mm	445
F	mm	603

**AREAS OF PROTECTED ZONE FAILURES**

- A. Provide coordinates of the area that the protected zone was penetrated more than .25 inches by a vehicle component other than one that is normally in contact with the windshield.
- No Penetration

X	Y

- B. Provide coordinates of the area beneath the protected zone that the inner surface of the windshield was penetrated by a vehicle component.
- No Penetration

X	Y

**DATA SHEET NO. 15 ... (CONTINUED)**  
**SUMMARY OF FMVSS 212, 219 (PARTIAL), AND 301 DATA**

Test Vehicle: 2020 Volkswagen Passat four door sedan  
Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20205803  
Test Date: 3/4/2020

**FMVSS 301 FUEL SYSTEM INTEGRITY POST IMPACT DATA**

Temperature at Time of Impact: 21 ° C

Test Time: 9:30 AM


**STODDARD SOLVENT SPILLAGE MEASUREMENTS**

- A. From impact until vehicle motion ceases: 0 oz.  
(Maximum allowable is 1 oz.)
- B. For the 5-minute period after motion ceases: 0 oz.  
(Maximum allowable is 5 oz.)
- C. For the following 25 minutes: 0 oz.  
(Maximum allowable is 1 oz./minute)
- D. Spillage: No Spillage Occurred

**DATA SHEET NO. 16**  
**FMVSS 301 STATIC ROLLOVER RESULTS**

Test Vehicle: 2020 Volkswagen Passat four door sedan  
Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20205803  
Test Date: 3/4/2020

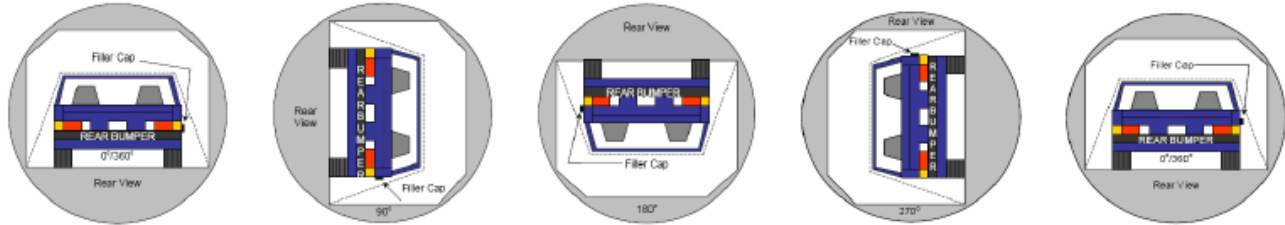

0° TO 90°

90° TO 180°

180° TO 270°

270° TO 360°

1. The specified fixture rollover rate for each 90° of rotation is 60 to 180 seconds.
2. The position hold time at each position is 300 seconds (minimum).
3. Details of Stoddard Solvent Spillage: No Spillage Occurred

**SOLVENT COLLECTION TIME TABLE IN SECONDS**

Test Phase	Rotation Time	Hold Time	Total Time
0° to 90°	70	300	370
90° to 180°	68	300	368
180° to 270°	67	300	367
270° to 360°	70	300	370

**FMVSS 301 SPILLAGE TABLE**

Test Phase	First 5 Minutes	Sixth Minute	Seventh Minute	Eighth Minute
0° to 90°	0	0	0	
90° to 180°	0	0	0	
180° to 270°	0	0	0	
270° to 360°	0	0	0	


**SOLVENT SPILLAGE LOCATION TABLE**

Test Phase	Spillage Location
0° to 90°	None
90° to 180°	None
180° to 270°	None
270° to 360°	None

**DATA SHEET NO. 17  
DUMMY / VEHICLE TEMPERATURE STABILIZATION CHART**

Test Vehicle: 2020 Volkswagen Passat four door sedan  
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20205803  
 Test Date: 3/4/2020

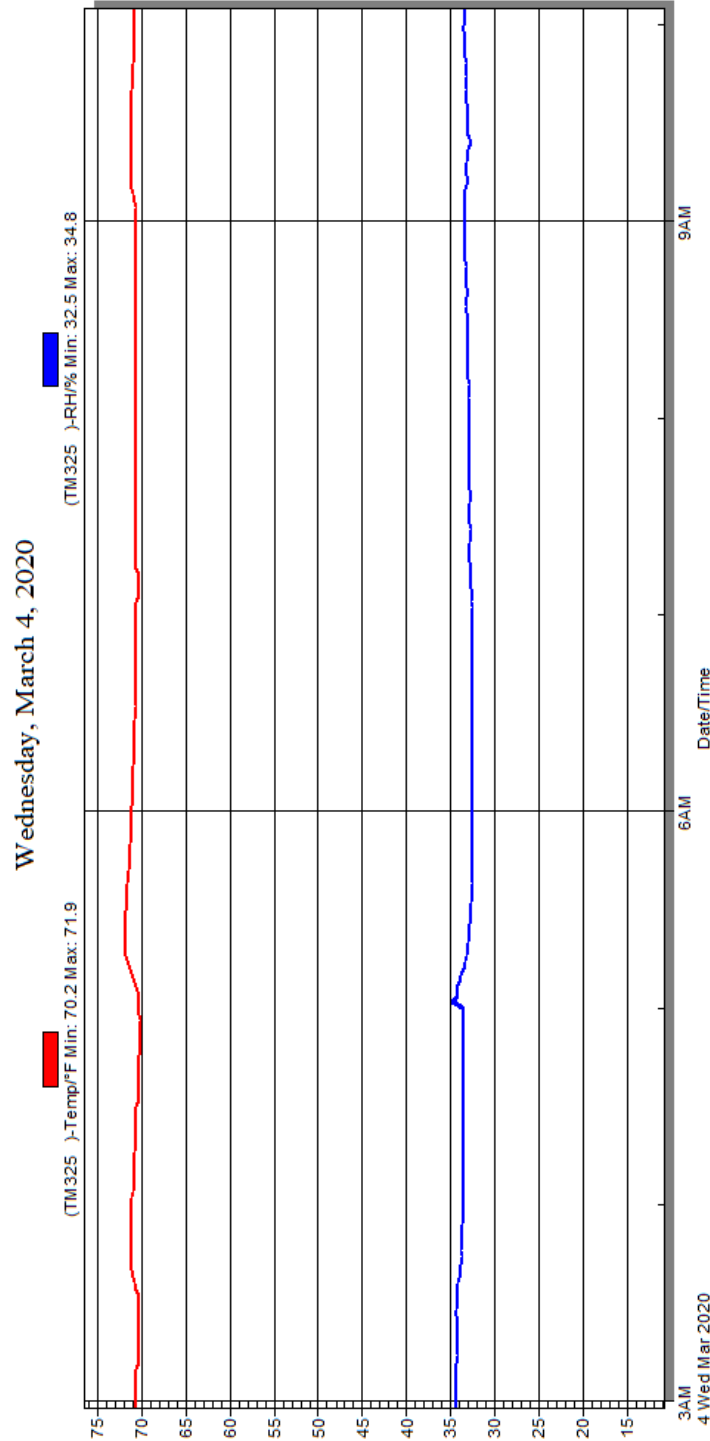

**Temperature and Humidity Stabilization Chart/Data for Dummies and Test Vehicle**



**APPENDIX A**  
**PHOTOGRAPHS**

## TABLE OF PHOTOGRAPHS

<b>Fig.</b>	<b>Description</b>	<b>Page</b>
1	Load Cell Location	A-5
2	Pre-Test Load Cell Wall	A-5
3	Post-Test Load Cell Wall	A-6
4	Manufacturer's Label	A-6
5	Tire Placard	A-7
6	2020 Volkswagen Passat Frontal As Delivered	A-7
7	Left Rear 3-4 View, as Received	A-8
8	Pre-Test Front View of Test Vehicle	A-8
9	Post-Test Front View of Test Vehicle	A-9
10	Pre-Test Left View of Test Vehicle	A-9
11	Post-Test Left View of Test Vehicle	A-10
12	Pre-Test Right View of Test Vehicle	A-10
13	Post-Test Right View of Test Vehicle	A-11
14	Pre-Test Right Front 3-4 View	A-11
15	Post-Test Right Front 3-4 View	A-12
16	Pre-Test Left Rear 3-4 View	A-12
17	Post-Test Left Rear 3-4 View	A-13
18	Pre-Test Windshield View	A-13
19	Post-Test Windshield View	A-14
20	Pre-Test Engine Compartment View	A-14
21	Post-Test Engine Compartment View	A-15
22	Pre-Test Fuel Filler Cap View	A-15
23	Post-Test Fuel Filler Cap View	A-16
24	Pre-Test Front Underbody View <sup>1</sup>	A-16
25	Post-Test Front Underbody View <sup>1</sup>	A-17
26	Pre-Test Rear Underbody View <sup>1</sup>	A-17
27	Post-Test Rear Underbody View <sup>1</sup>	A-18
28	Pre-Test Dummy Cable Routing	A-18
29	Post-Test Dummy Cable Routing	A-19
30	Pre-Test Driver Dummy Front View	A-19
31	Post-Test Driver Dummy Front View	A-20
32	Pre-Test Driver Dummy Window View	A-20
33	Post-Test Driver Dummy Window View	A-21
34	Pre-Test Driver Dummy and Vehicle Interior View	A-21
35	Post-Test Driver Dummy and Vehicle Interior View	A-22

<b>Fig.</b>	<b>Description</b>	<b>Page</b>
36	Pre-Test Driver's Seat Fore-Aft Markings	A-22
37	Post-Test Driver's Seat Fore-Aft Markings	A-23
38	Pre-Test View of Belt Anchorage for Driver Dummy	A-23
39	Post-Test View of Belt Anchorage for Driver Dummy	A-24
40	Pre-Test View of Belt Buckle and Latch Plate for Driver Dummy	A-24
41	Post-Test View of Belt Buckle and Latch Plate for Driver Dummy	A-25
42	Pre-Test Driver Dummy Feet	A-25
43	Post-Test Driver Dummy Feet	A-26
44	Pre-Test Driver's Side Knee Bolster	A-26
45	Post-Test Driver's Side Knee Bolster	A-27
46	Pre-Test Driver's Side Floorpan	A-27
47	Post-Test Driver's Side Floorpan	A-28
48	Post-Test Driver Dummy Face	A-28
49	Post-Test Driver Dummy Contact With Airbag	A-29
50	Post-Test Driver Dummy Contact With Headrest	A-29
51	Pre-Test View of the Steering Wheel	A-30
52	Post-Test View of the Steering Wheel	A-30
53	Pre-Test Passenger Dummy Front View	A-31
54	Post-Test Passenger Dummy Front View	A-31
55	Pre-Test Passenger Dummy Window View	A-32
56	Post-Test Passenger Dummy Window View	A-32
57	Pre-Test Passenger Dummy and Vehicle Interior View	A-33
58	Post-Test Passenger Dummy and Vehicle Interior View	A-33
59	Pre-Test Passenger's Seat Fore-Aft Markings	A-34
60	Post-Test Passenger's Seat Fore-Aft Markings	A-34
61	Pre-Test View of Belt Anchorage for Passenger Dummy	A-35
62	Post-Test View of Belt Anchorage for Passenger Dummy	A-35
63	Pre-Test View of Belt Buckle and Latch Plate for Passenger Dummy	A-36
64	Post-Test View of Belt Buckle and Latch Plate for Passenger Dummy	A-36
65	Pre-Test Passenger Dummy Feet	A-37
66	Post-Test Passenger Dummy Feet	A-37
67	Pre-Test Passenger's Side Knee Bolster	A-38
68	Post-Test Passenger's Side Knee Bolster	A-38
69	Pre-Test Passenger's Side Floorpan	A-39
70	Post-Test Passenger's Side Floorpan	A-39
71	Post-Test Passenger Dummy Face	A-40

<b>Fig.</b>	<b>Description</b>	<b>Page</b>
72	Post-Test Passenger Dummy Contact With Airbag	A-40
73	Post-Test Passenger Dummy Contact With Headrest	A-41
74	Photograph of Ballast Installed in Vehicle	A-41
75	Post-Test Stoddard Solvent Spillage Location View, if Required	A-42
76	Post-Test Speed Trap Read-Out	A-42
77	Vehicle at 0° on Static Rollover Device	A-43
78	Vehicle at 90° on Static Rollover Device	A-43
79	Vehicle at 180° on Static Rollover Device	A-44
80	Vehicle at 270° on Static Rollover Device	A-44
81	Vehicle at 360° on Static Rollover Device	A-45
82	2020 Volkswagen Passat Frontal Impact Event	A-45
83	Monroney Label Photograph	A-46

**<sup>1</sup>NOTE:** *The underbody views should include the following vehicle components: fuel pump, fuel lines, sender unit, fuel tank filler pipe and any other visible system components.*

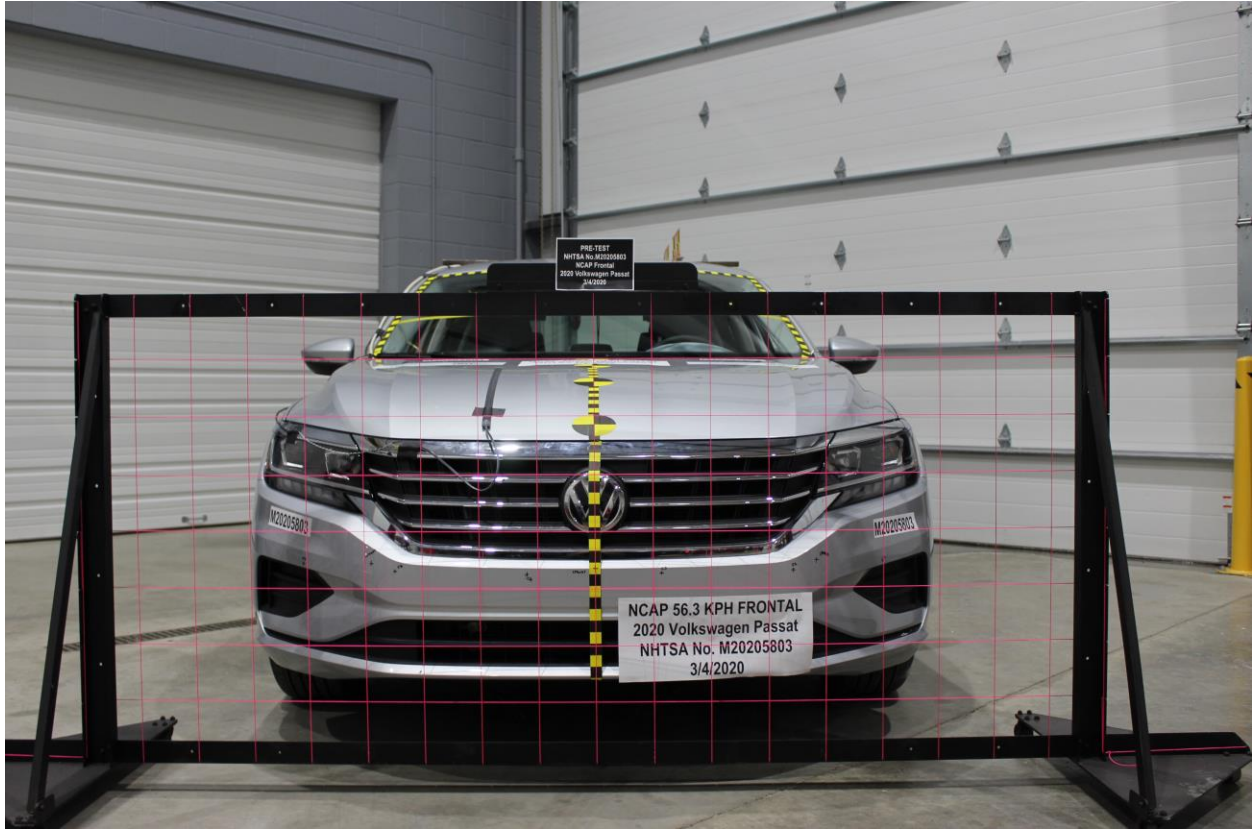


Figure A-1: Load Cell Location



Figure A-2: Pre-Test Load Cell Wall



Figure A-3: Post-Test Load Cell Wall

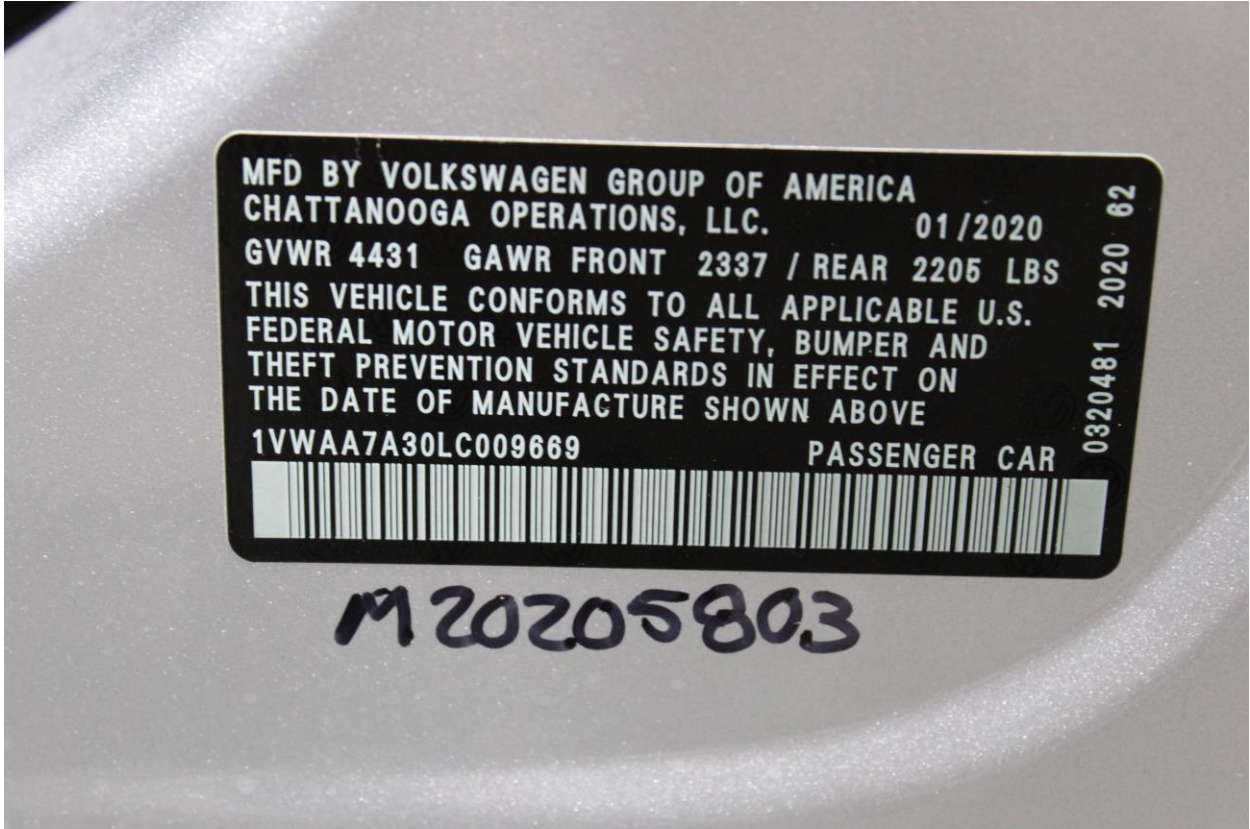


Figure A-4: Manufacturer's Label

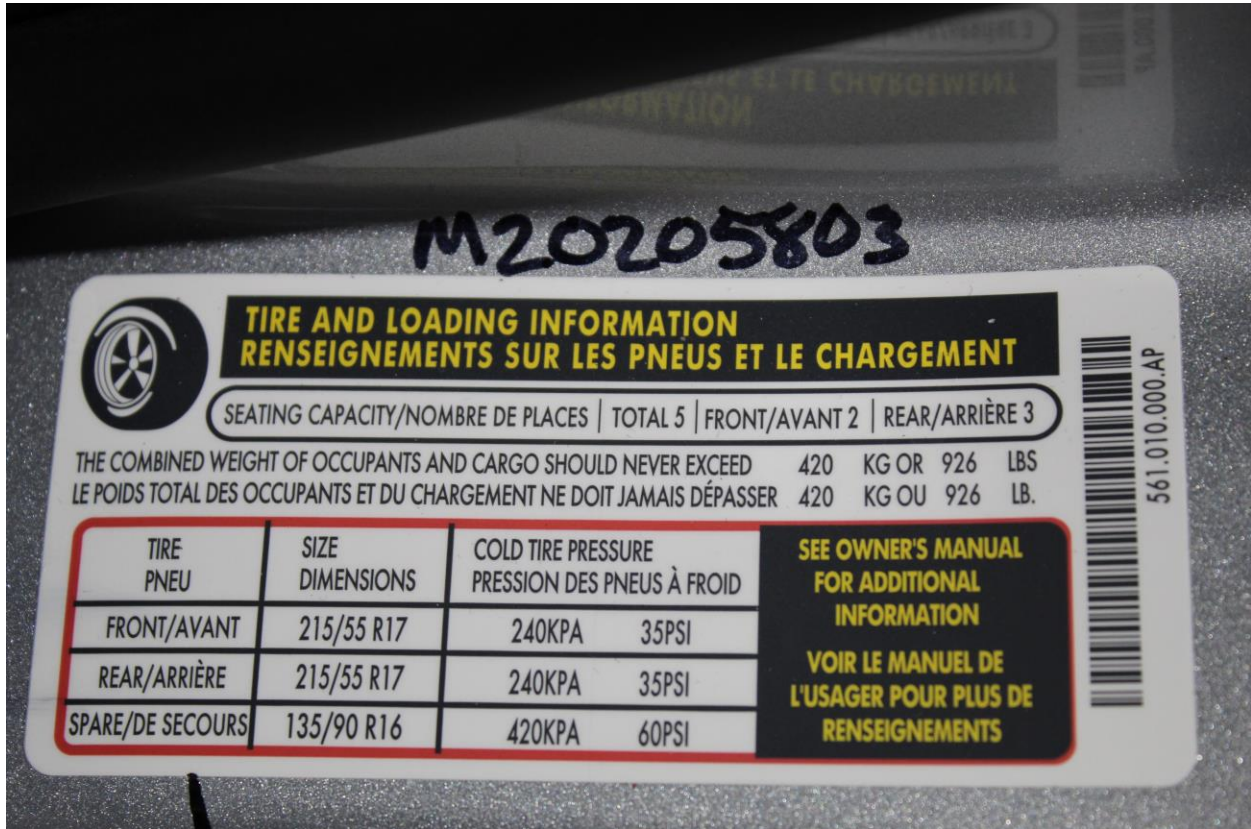



Figure A-5: Tire Placard



Figure A-6: 2020 Volkswagen Passat Frontal As Delivered



**Figure A-7: Left Rear 3-4 View, As Received**

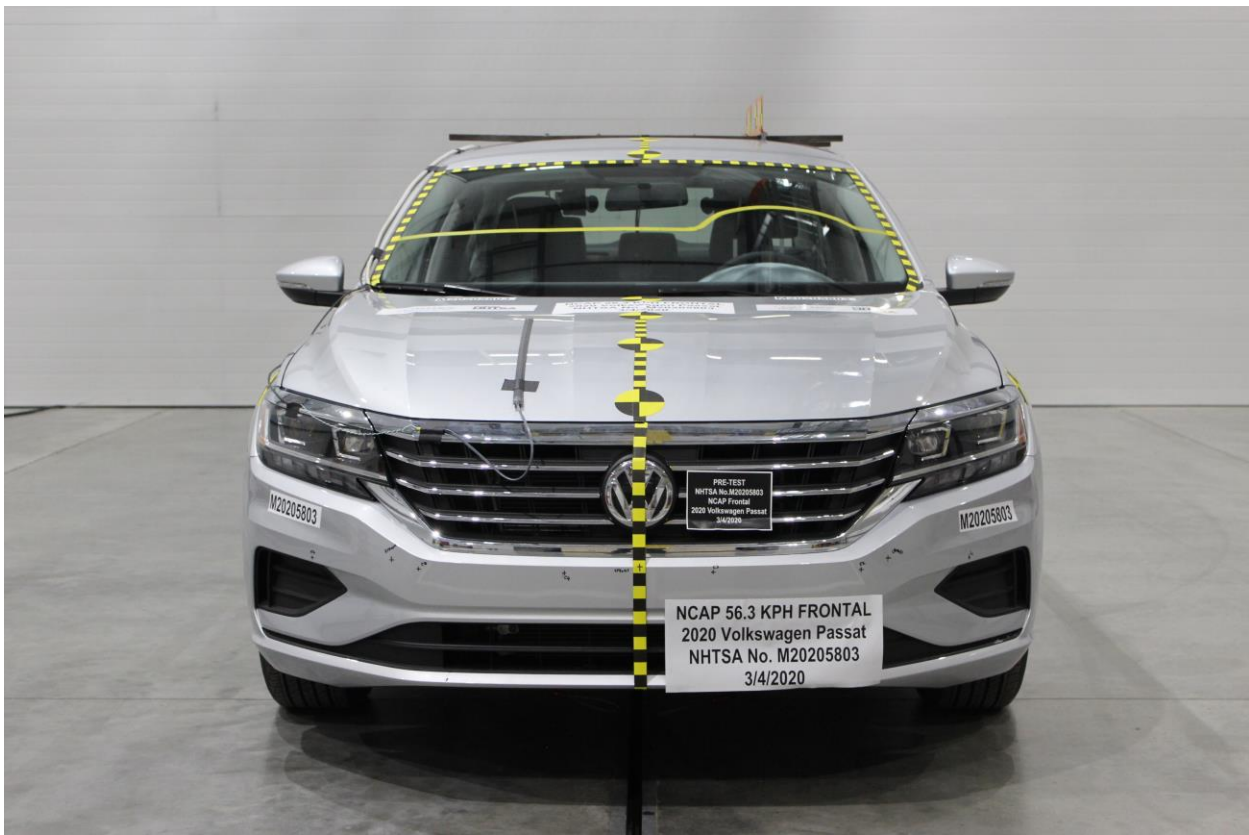

**Figure A-8: Pre-Test Front View of Test Vehicle**





**Figure A-9: Post-Test Front View of Test Vehicle**



**Figure A-10: Pre-Test Left View of Test Vehicle**



**Figure A-11: Post-Test Left View of Test Vehicle**



**Figure A-12: Pre-Test Right View of Test Vehicle**



**Figure A-13: Post-Test Right View of Test Vehicle**



**Figure A-14: Pre-Test Right Front 3-4 View**



**Figure A-15: Post-Test Right Front 3-4 View**



**Figure A-16: Pre-Test Left Rear 3-4 View**



**Figure A-17: Post-Test Left Rear 3-4 View**



**Figure A-18: Pre-Test Windshield View**



Figure A-19: Post-Test Windshield View

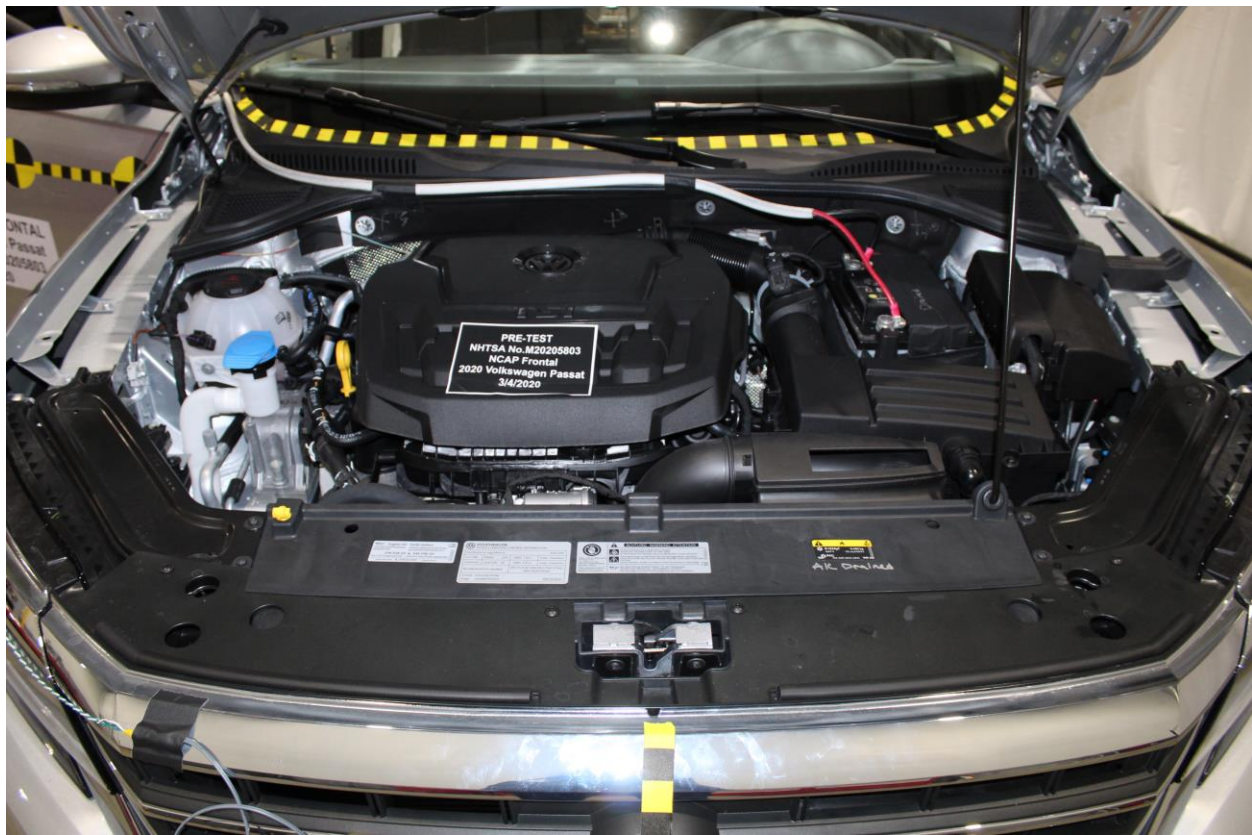


Figure A-20: Pre-Test Engine Compartment View

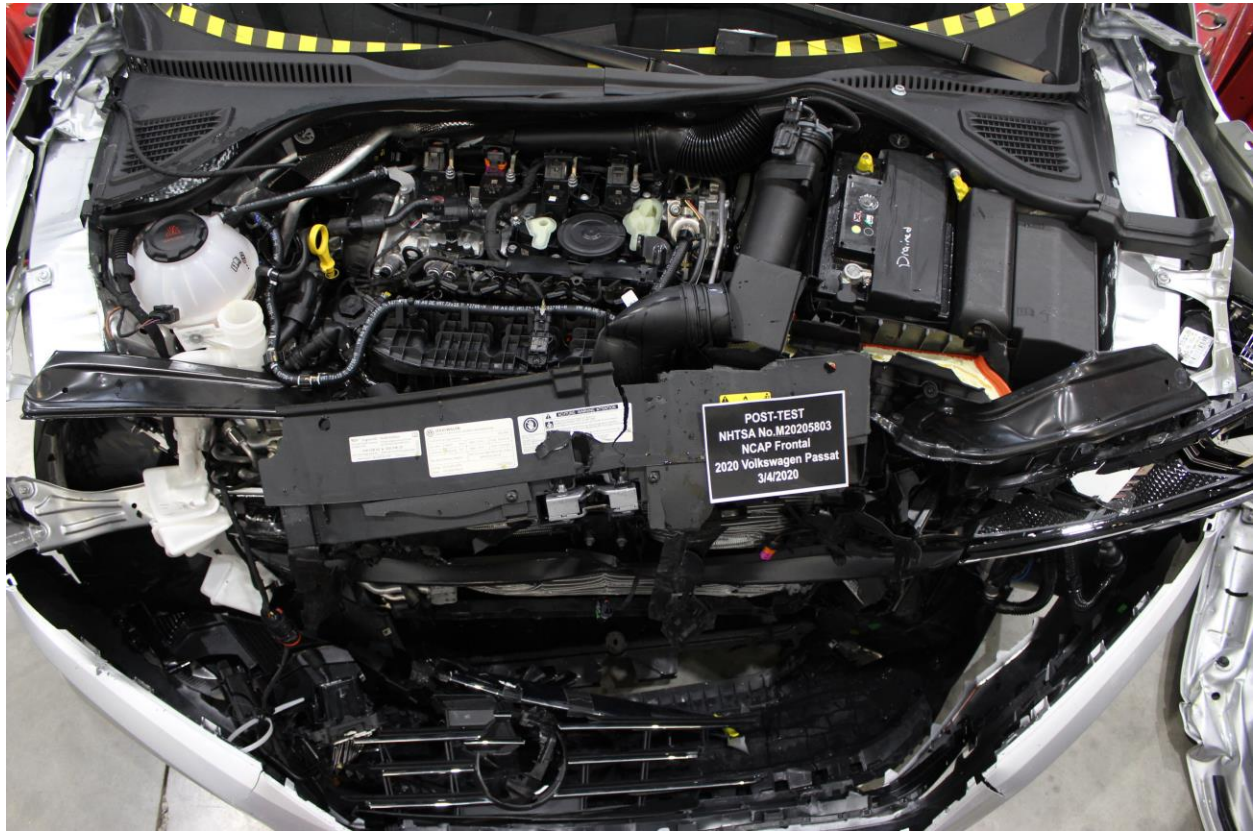


Figure A-21: Post-Test Engine Compartment View



Figure A-22: Pre-Test Fuel Filler Cap View



Figure A-23: Post-Test Fuel Filler Cap View



Figure A-24: Pre-Test Front Underbody View





Figure A-25: Post-Test Front Underbody View

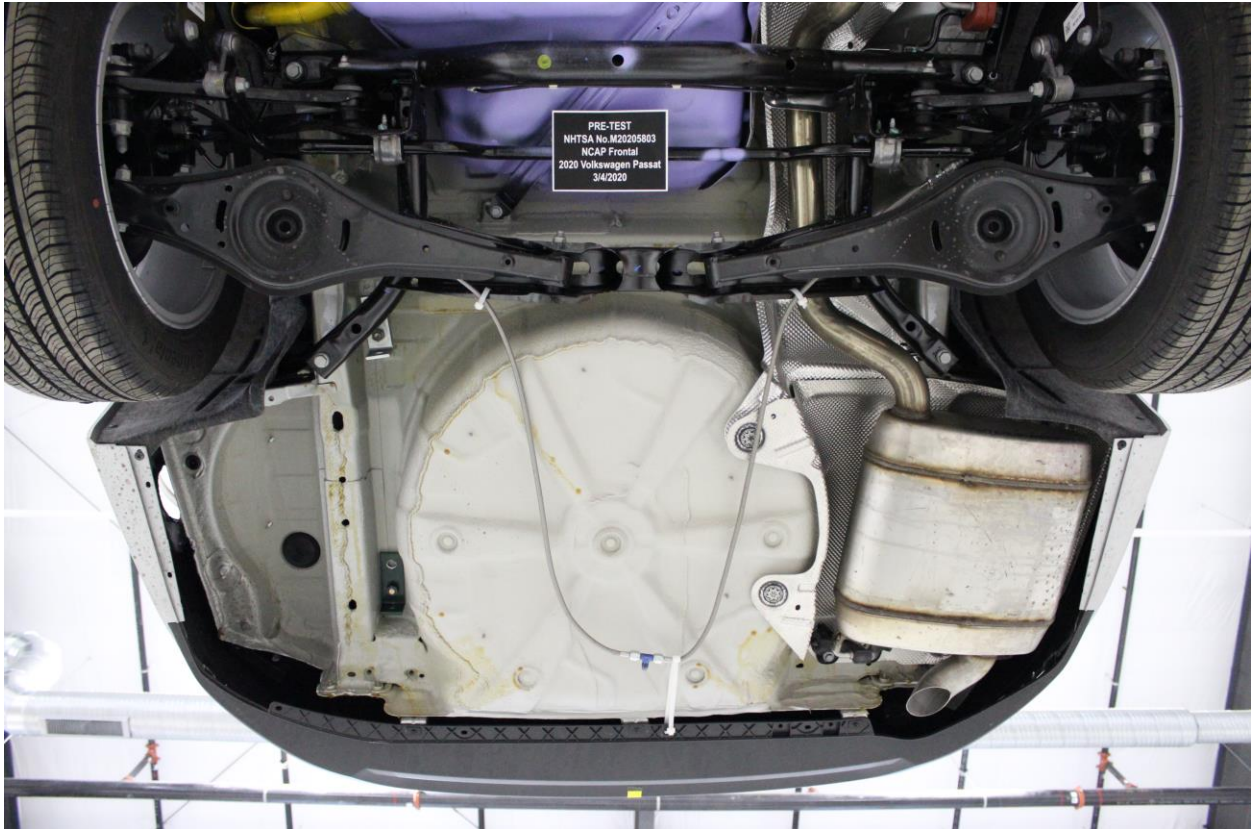


Figure A-26: Pre-Test Rear Underbody View




**Figure A-27: Post-Test Rear Underbody View**



**Figure A-28: Pre-Test Dummy Cable Routing**



**Figure A-29: Post-Test Dummy Cable Routing**

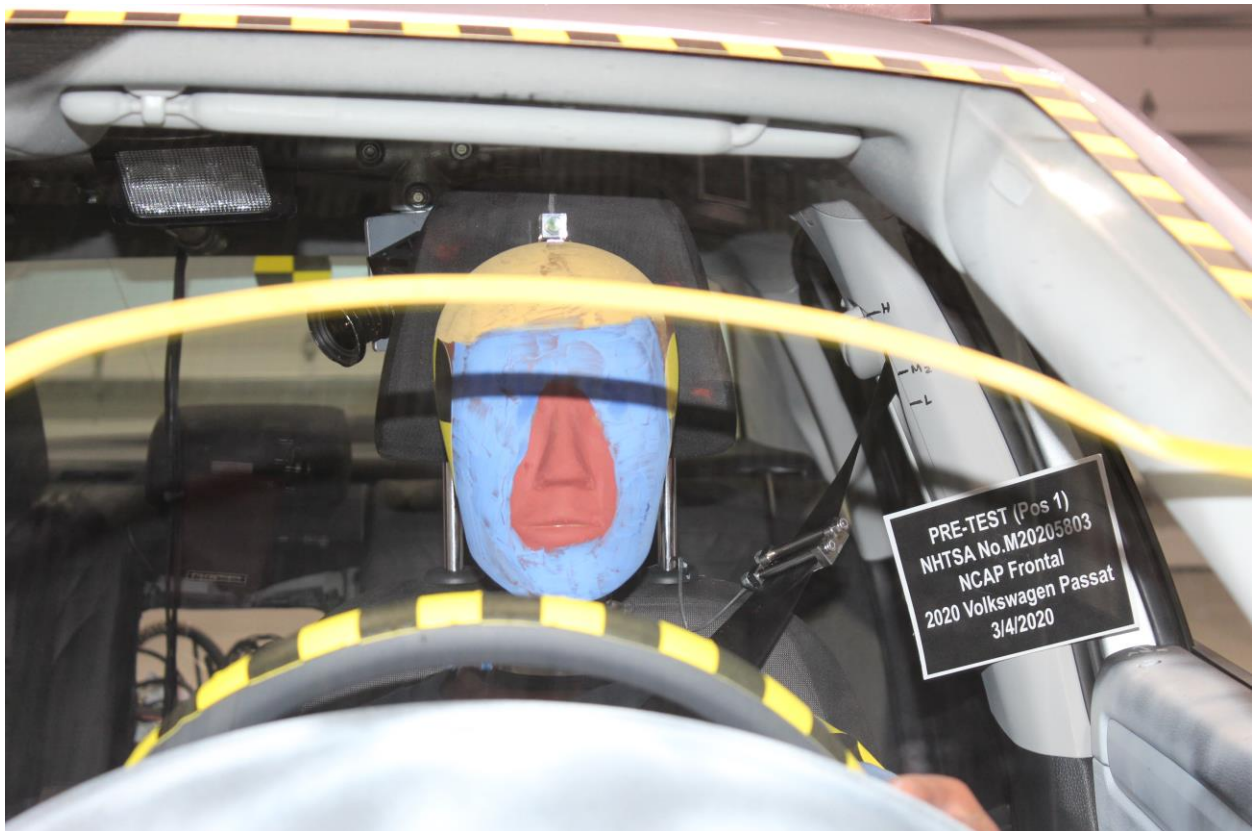

**Figure A-30: Pre-Test Driver Dummy Front View**



**Figure A-31: Post-Test Driver Dummy Front View**



**Figure A-32: Pre-Test Driver Dummy Window View**



**Figure A-33: Post-Test Driver Dummy Window View**



**Figure A-34: Pre-Test Driver Dummy and Vehicle Interior View**



Figure A-35: Post-Test Driver Dummy and Vehicle Interior View




Figure A-36: Pre-Test Driver's Seat Fore-Aft Markings



**Figure A-37: Post-Test Driver's Seat Fore-Aft Markings**



**Figure A-38: Pre-Test View of Belt Anchorage for Driver Dummy**

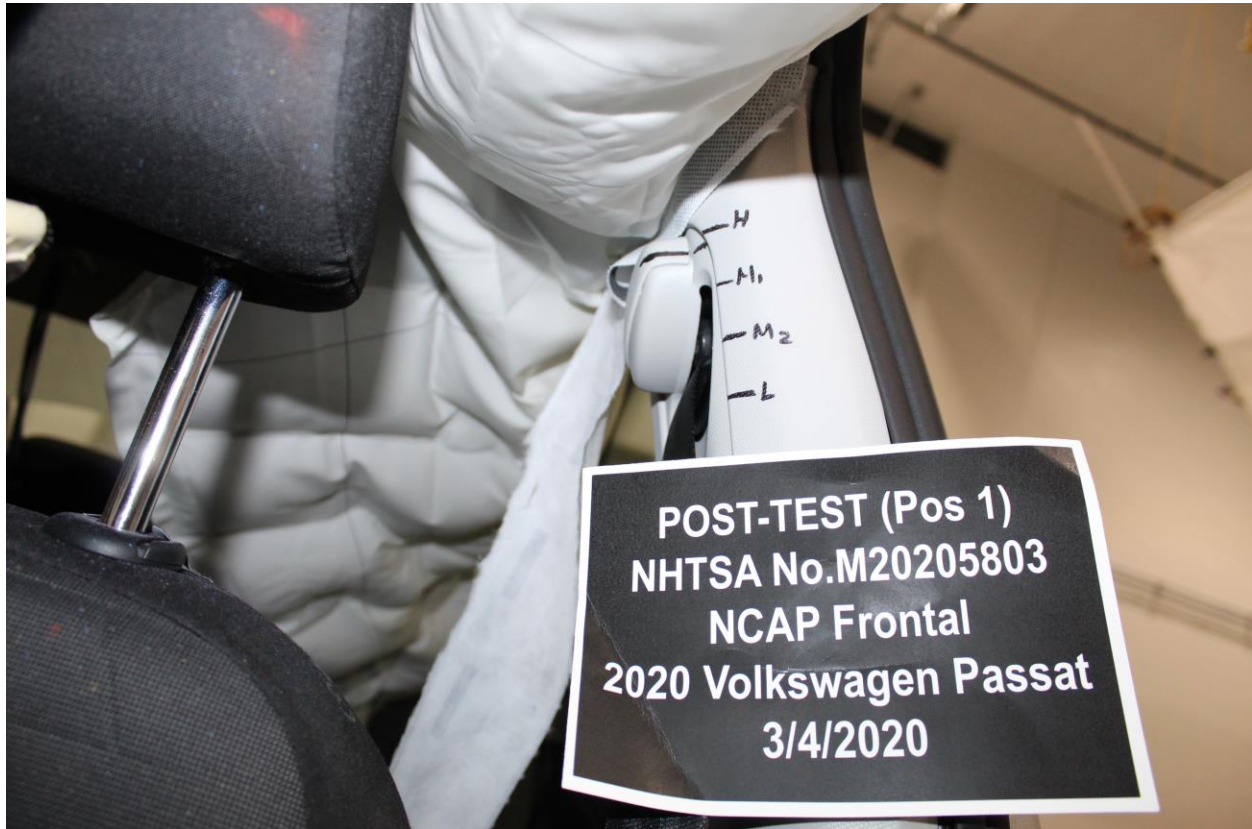

**Figure A-39: Post-Test View of Belt Anchorage for Driver Dummy**




**Figure A-40: Pre-Test View of Belt Buckle and Latch Plate for Driver Dummy**





**Figure A-41: Post-Test View of Belt Buckle and Latch Plate for Driver Dummy**

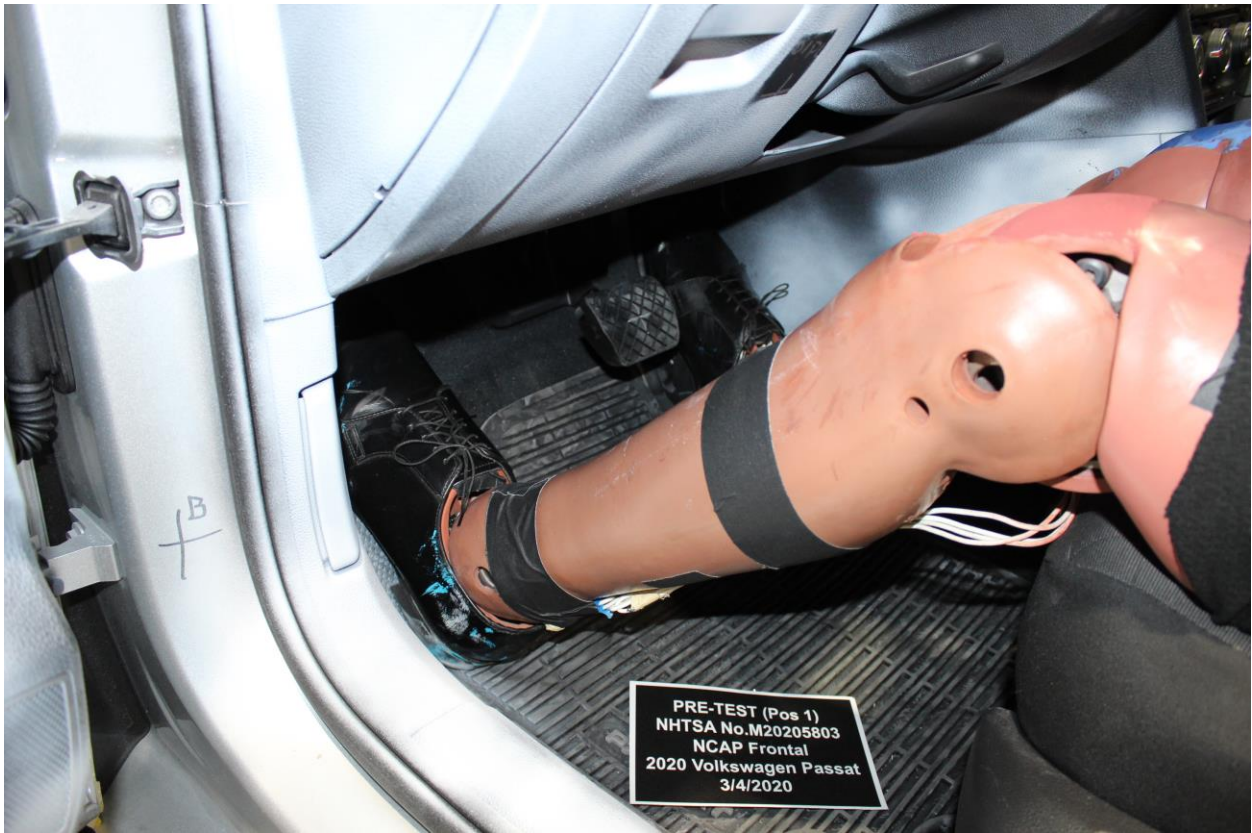

**Figure A-42: Pre-Test Driver Dummy Feet**



**Figure A-43: Post-Test Driver Dummy Feet**



**Figure A-44: Pre-Test Driver's Side Knee Bolster**



**Figure A-45: Post-Test Driver's Side Knee Bolster**



**Figure A-46: Pre-Test Driver's Side Floorpan**



**Figure A-47: Post-Test Driver's Side Floorpan**



**Figure A-48: Post-Test Driver Dummy Face**



**Figure A-49: Post-Test Driver Dummy Contact With Airbag**



**Figure A-50: Post-Test Driver Dummy Contact With Headrest**



**Figure A-51: Pre-Test View of the Steering Wheel**



**Figure A-52: Post-Test View of the Steering Wheel**



**Figure A-53: Pre-Test Passenger Dummy Front View**



**Figure A-54: Post-Test Passenger Dummy Front View**



**Figure A-55: Pre-Test Passenger Dummy Window View**



**Figure A-56: Post-Test Passenger Dummy Window View**





**Figure A-57: Pre-Test Passenger Dummy and Vehicle Interior View**



**Figure A-58: Post-Test Passenger Dummy and Vehicle Interior View**



Figure A-59: Pre-Test Passenger's Seat Fore-Aft Markings



Figure A-60: Post-Test Passenger's Seat Fore-Aft Markings



**Figure A-61: Pre-Test View of Belt Anchorage for Passenger Dummy**



**Figure A-62: Post-Test View of Belt Anchorage for Passenger Dummy**



**Figure A-63: Pre-Test View of Belt Buckle and Latch Plate for Passenger Dummy**



**Figure A-64: Post-Test View of Belt Buckle and Latch Plate for Passenger Dummy**



**Figure A-65: Pre-Test Passenger Dummy Feet**



**Figure A-66: Post-Test Passenger Dummy Feet**



**Figure A-67: Pre-Test Passenger's Side Knee Bolster**




**Figure A-68: Post-Test Passenger's Side Knee Bolster**



**Figure A-69: Pre-Test Passenger's Side Floorpan**



**Figure A-70: Post-Test Passenger's Side Floorpan**

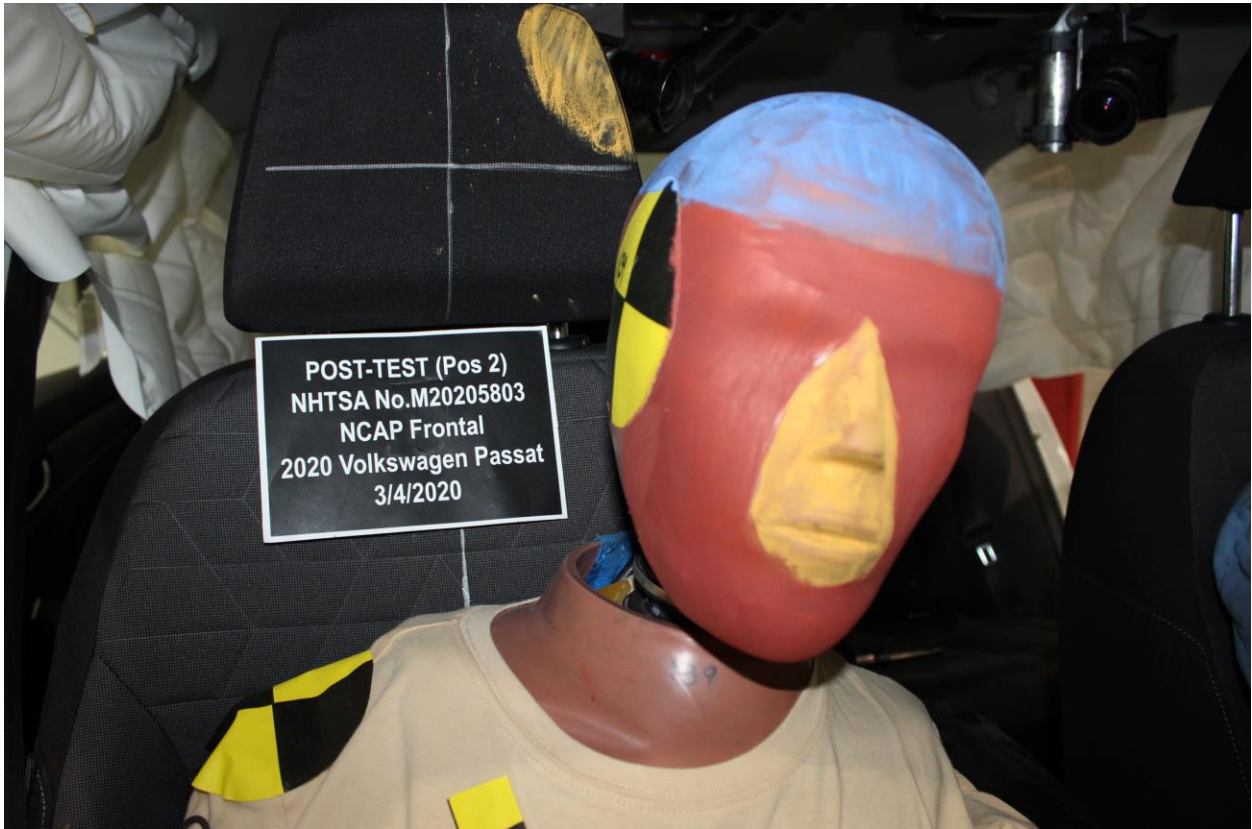

**Figure A-71: Post-Test Passenger Dummy Face**



**Figure A-72: Post-Test Passenger Dummy Contact With Airbag**





**Figure A-73: Post-Test Passenger Dummy Contact With Headrest**



**Figure A-74: Photograph of Ballast Installed in Vehicle**

# Photo Not Applicable

Figure A-75: Post-Test Stoddard Solvent Spillage Location View, If Required



Figure A-76: Post-Test Speed Trap Read-Out



Figure A-77: Vehicle at 0° on Static Rollover Device



Figure A-78: Vehicle at 90° on Static Rollover Device



**Figure A-79: Vehicle at 180° on Static Rollover Device**



**Figure A-80: Vehicle at 270° on Static Rollover Device**



**Figure A-81: Vehicle at 360° on Static Rollover Device**



**Figure A-82: 2020 Volkswagen Passat Frontal Impact Event**

**EPA DOT Fuel Economy and Environment**

**Fuel Economy**  
**27** MPG  
combined city/hwy  
**23** city  
**34** highway  
**3.7** gallons per 100 miles

Mid-Size Cars range from 12 to 136 MPG. The best vehicle rates 136 MPG.

**You save \$0**  
**in fuel costs over 5 years**  
 compared to the average new vehicle.

**Annual fuel COST \$1,500**

**Fuel Economy & Greenhouse Gas Rating** (tailpipe only) **Smog Rating** (tailpipe only)

1 6 10 1 7 10  
Best Best

This vehicle emits 330 grams of CO<sub>2</sub> per mile. The best emits 0 grams per mile (tailpipe only). Producing and distributing fuel also create emissions. Learn more at [fuelconomy.gov](http://fuelconomy.gov).

Actual results will vary for many reasons, including driving conditions and how you drive and maintain your vehicle. The average new vehicle gets 27 MPG and costs \$7,500 to fuel over 5 years. Cost estimates are based on 15,000 miles per year at \$2.70 per gallon. MPGe is miles per gasoline gallon equivalent. Vehicle emissions are a significant cause of climate change and smog.

**fuelconomy.gov**  
 Calculate personalized estimates and compare vehicles

**Gasoline Vehicle**

**2020 Passat 2.0T S**  
 Reflex Silver Metallic Exterior  
 Titan Black Cloth Interior

6-speed Automatic w/ Tiptronic®

**STANDARD FEATURES** (unless replaced by packages or options)

**PERFORMANCE**  
 - 2.0L TSI® 16-valve DOHC turbocharged 4-cylinder engine w/ direct fuel injection  
 - Front-wheel drive  
 - Four-wheel independent suspension  
 - Electro-mechanical power steering w/ variable assistance

**SAFETY FEATURES**  
 - 3-point safety belts, all seating positions  
 - Advanced Airbag Protection System w/ 6 airbags  
 - Anti-lock Braking System (ABS) w/ disc brakes  
 - Anti-Slip Regulation (ASR); Engine Brake Assist (EBA)  
 - Electronic Brake-pressure Distribution (EBD); Hydraulic Brake Assist (HBA)  
 - Electronic Stability Control (ESC); Electronic Differential Lock (EDL)  
 - Intelligent Crash Response System (ICRS); Automatic Post-Collision Braking System  
 - Lower Anchors & Tethers for Children (LATCH)  
 - Rear View Camera System  
 - Tire Pressure Monitoring System (TPMS)

**EXTERIOR**  
 - 17" alloy wheels w/ all-season tires  
 - Automatic, LED headlights & LED Daytime Running Lights (DRL); LED taillights  
 - Heated, foldable, power adjustable side mirrors w/ integrated turn signals  
 - Variable intermittent front wipers

**INTERIOR**  
 - Manual climate control  
 - 3-spoke steering wheel, multi-function  
 - Tilt & telescoping adjustable steering column  
 - Front seats: 6-way manual (includes height adjustment)  
 - Rear seat: 3-passenger, 60/40 split-folding w/ center armrest  
 - Cloth seating surfaces  
 - Center console w/ cup holders, armrest & storage  
 - Lockable glove compartment  
 - Dual front reading lights

**TECHNOLOGY & CONVENIENCE**  
 - Forward Collision Warning & Autonomous Emergency Braking (Front Assist)  
 - Blind Spot Monitor & Rear Traffic Alert  
 - Power door locks & trunk release w/ remote featuring panic button  
 - Anti-theft engine immobilizer  
 - Composition Media; touchscreen AM/FM/HD Radio™ w/ USB input, voice control & SiriusXM® Satellite Radio (w/ limited time trial subscription)  
 - 6-speaker sound system  
 - Bluetooth® connectivity (for compatible devices)  
 - VW App-Connect® (Smartphone Integration & Interface)  
 - Cruise control  
 - Color multi-function display (MFD) w/ trip computer

**WARRANTY INFORMATION**  
 - Volkswagen New Vehicle Limited Warranty:  
 4 years/50,000 miles (whichever occurs first)\*  
 Includes coverage for powertrain components\*  
 - Limited Warranty against Corrosion Perforation:  
 7 years/100,000 miles (whichever occurs first)\*  
 \*See owner's literature or dealer for important details and limitations.

**CAREFREE SCHEDULED MAINTENANCE**  
 - 2 years/20,000 miles (whichever occurs first)\*  
 \*See owner's literature or dealer for important details and limitations.

**24-HOUR ROADSIDE ASSISTANCE**  
 - 3 years/36,000 miles (whichever occurs first), for towing, jump starts, tire changes, out-of-fuel & lock-out.\* Services provided by third party supplier.  
 \*See owner's literature or dealer for important details and limitations.

**Base Manufacturer's Suggested Retail Price: \$22,995.00**

**PACKAGES & OPTIONS**

Reflex Silver Metallic Exterior	No Charge
Titan Black Cloth Interior	No Charge
Monster Mats® (set of 4) & Heavy Duty Trunk Liner w/ VW CarGo Blocks	\$235.00
Roadside Assistance Kit	\$85.00
6-speed Automatic w/ Tiptronic®	No Charge

Destination Charge \$920.00

**Total Manufacturer's Suggested Retail Price: \$24,235.00**  
Does not include fuel, license, title or registration fees, taxes, dealer fees, or any options or items not listed above.

Ready to make this your new ride? Apply now with Volkswagen Credit!

**GOVERNMENT 5-STAR SAFETY RATINGS**

**Overall Vehicle Score** **Not Rated**  
 Based on the combined ratings of frontal, side and rollover. Should ONLY be compared to other vehicles of similar size and weight.

<b>Frontal Crash</b>	<b>Driver Passenger</b>	<b>Not Rated</b>
<small>Based on the risk of injury in a frontal impact. Should ONLY be compared to other vehicles of similar size and weight.</small>		
<b>Side Crash</b>	<b>Front Seat Rear Seat</b>	<b>Not Rated</b>
<small>Based on the risk of injury in a side impact.</small>		
<b>Rollover</b>		<b>★★★★</b>
<small>Based on the risk of rollover in a single-vehicle crash.</small>		

Star ratings range from 1 to 5 stars (★★★★★) with 5 being the highest. Source: National Highway Traffic Safety Administration (NHTSA). [www.safercar.gov](http://www.safercar.gov) or 1-888-327-4236

**PARTS CONTENT INFORMATION**

For vehicles in this carline:  
 U.S./CANADIAN  
**PARTS CONTENT: 44%**  
 Major sources of foreign parts content:  
 MEXICO 24%  
 JAPAN 16%

Note: parts content does not include final assembly, distribution or other non-parts costs.  
 For this vehicle:  
 Final assembly point:  
**CHATTANOOGA TN,U.S.A.**  
 Country of origin:  
 ENGINE: MEXICO  
 TRANSMISSION: JAPAN

VIN: 1VWAATJ30LC099669  
 COMM. NUMBER: XP9119

Port of Entry: CHATTANOOGA

Figure A-83: Monroney Label Photograph

**APPENDIX B**  
**VEHICLE & DUMMY RESPONSE DATA TRACES**

**Table of Data Plots**

No.	Description	Page
Plot 1	Driver Head X Acceleration vs. Time Primary	B-5
Plot 2	Driver Head Y Acceleration vs. Time Primary	B-5
Plot 3	Driver Head Z Acceleration vs. Time Primary	B-5
Plot 4	Driver Head Resultant Acceleration vs. Time Primary	B-5
Plot 5	Driver Chest X Deflection vs. Time	B-6
Plot 6	Driver Chest X Acceleration vs. Time Primary	B-6
Plot 7	Driver Chest Y Acceleration vs. Time Primary	B-6
Plot 8	Driver Chest Z Acceleration vs. Time Primary	B-6
Plot 9	Driver Chest Resultant Acceleration vs. Time Primary	B-7
Plot 10	Driver Upper Neck Force X vs. Time Primary	B-7
Plot 11	Driver Upper Neck Force Z vs. Time Primary	B-7
Plot 12	Driver Upper Neck Moment Y vs. Time Primary	B-7
Plot 13	Driver Nij vs. Time Primary	B-8
Plot 14	Driver Left Femur Force vs. Time	B-8
Plot 15	Driver Right Femur Force vs. Time	B-8
Plot 16	Passenger Head X Acceleration vs. Time Primary	B-8
Plot 17	Passenger Head Y Acceleration vs. Time Primary	B-9
Plot 18	Passenger Head Z Acceleration vs. Time Primary	B-9
Plot 19	Passenger Head Resultant Acceleration vs. Time Primary	B-9
Plot 20	Passenger Chest X Deflection vs. Time	B-9
Plot 21	Passenger Chest X Acceleration vs. Time Primary	B-10
Plot 22	Passenger Chest Y Acceleration vs. Time Primary	B-10
Plot 23	Passenger Chest Z Acceleration vs. Time Primary	B-10
Plot 24	Passenger Chest Resultant Acceleration vs. Time Primary	B-10
Plot 25	Passenger Upper Neck Force X vs. Time Primary	B-11
Plot 26	Passenger Upper Neck Force Z vs. Time Primary	B-11
Plot 27	Passenger Upper Neck Moment Y vs. Time Primary	B-11
Plot 28	Passenger Nij vs. Time Primary	B-11
Plot 29	Passenger Left Femur Force vs. Time	B-12
Plot 30	Passenger Right Femur Force vs. Time	B-12





The following additional dummy and vehicle response data can be found in the R&D section of the NHTSA website at [www.NHTSA.gov](http://www.NHTSA.gov)





Driver Head X Acceleration Redundant  
 Driver Head Y Acceleration Redundant  
 Driver Head Z Acceleration Redundant  
 Driver Upper Neck Force Y  
 Driver Upper Neck Moment X  
 Driver Upper Neck Moment Z  
 Driver Chest X Acceleration Redundant  
 Driver Chest Y Acceleration Redundant  
 Driver Chest Z Acceleration Redundant  
 Driver Pelvis X  
 Driver Pelvis Y  
 Driver Pelvis Z  
 Driver Left Femur Redundant  
 Driver Right Femur Redundant  
 Driver Left Upper Tibia Moment X  
 Driver Left Upper Tibia Moment Y




Driver Left Upper Tibia Force Z  
Driver Left Lower Tibia Moment X  
Driver Left Lower Tibia Moment Y  
Driver Left Lower Tibia Force Z  
Driver Right Upper Tibia Moment X  
Driver Right Upper Tibia Moment Y  
Driver Right Upper Tibia Force Z  
Driver Right Lower Tibia Moment X  
Driver Right Lower Tibia Moment Y  
Driver Right Lower Tibia Force Z  
Driver Left Foot Fore Z  
Driver Left Foot Aft X  
Driver Left Foot Aft Z  
Driver Right Foot Fore Z  
Driver Right Foot Aft X  
Driver Right Foot Aft Z  
Driver Shoulder Belt Force  
Driver Lap Belt Force  
Driver Head Angular Velocity X  
Driver Head Angular Velocity Y  
Driver Head Angular Velocity Z  
Passenger Head X Acceleration Redundant  
Passenger Head Y Acceleration Redundant  
Passenger Head Z Acceleration Redundant  
Passenger Upper Neck Force X  
Passenger Upper Neck Force Z  
Passenger Upper Neck Moment Y  
Passenger Chest X Acceleration Redundant  
Passenger Chest Y Acceleration Redundant  
Passenger Chest Z Acceleration Redundant  
Passenger Pelvis X  
Passenger Pelvis Y  
Passenger Pelvis Z  
Passenger Left Femur Redundant  
Passenger Right Femur Redundant  
Passenger Left Upper Tibia Moment X  
Passenger Left Upper Tibia Moment Y  
Passenger Left Upper Tibia Force Z  
Passenger Left Lower Tibia Moment X  
Passenger Left Lower Tibia Moment Y  
Passenger Left Lower Tibia Force Z  
Passenger Right Upper Tibia Moment X  
Passenger Right Upper Tibia Moment Y  
Passenger Right Upper Tibia Force Z  
Passenger Right Lower Tibia Moment X  
Passenger Right Lower Tibia Moment Y  
Passenger Right Lower Tibia Force Z  
Passenger Left Foot Fore Z  
Passenger Left Foot Aft X  
Passenger Left Foot Aft Z

Passenger Right Foot Fore Z  
Passenger Right Foot Aft X  
Passenger Right Foot Aft Z  
Passenger Shoulder Belt Force  
Passenger Lap Belt Force  
Passenger Head Angular Velocity X  
Passenger Head Angular Velocity Y  
Passenger Head Angular Velocity Z  
Left Rear Seat Crossmember X  
Left Rear Seat Crossmember Z  
Right Rear Seat Crossmember X  
Right Rear Seat Crossmember Z  
Left Rear Seat Crossmember X Redundant  
Right Rear Seat Crossmember X Redundant  
Vehicle Engine Top X  
Vehicle Engine Bottom X  
Load Cell Barrier Forces and Moments

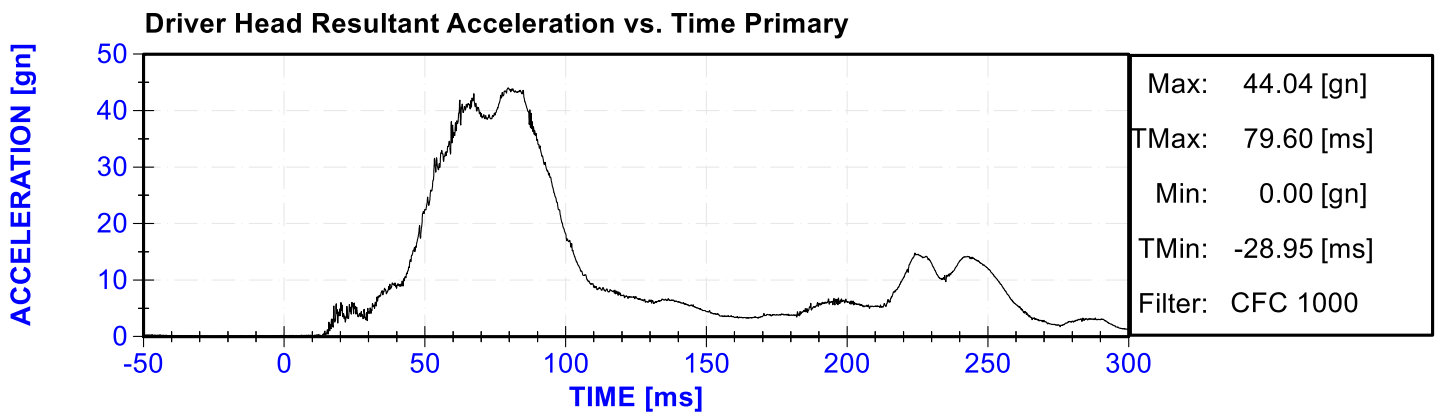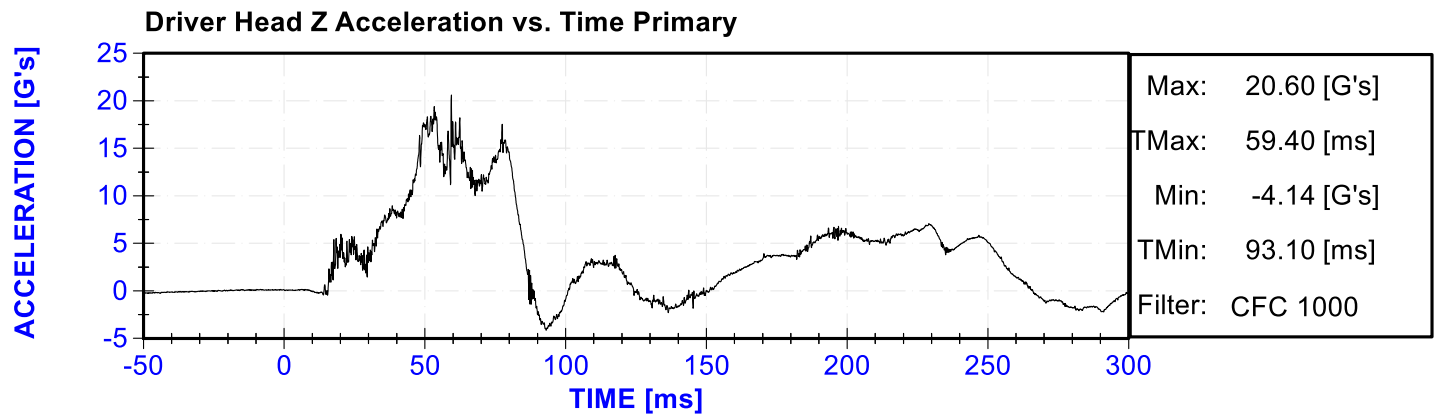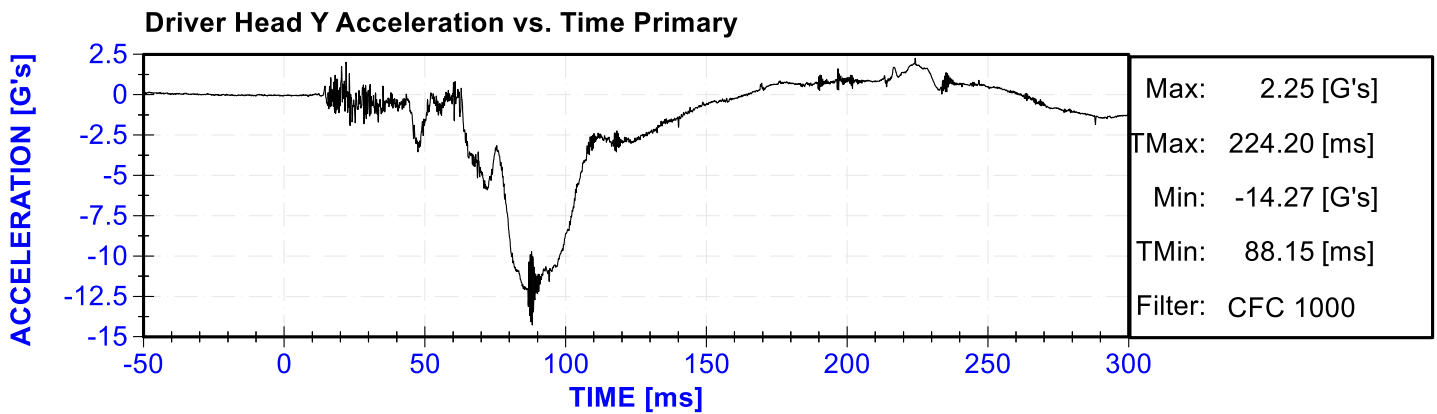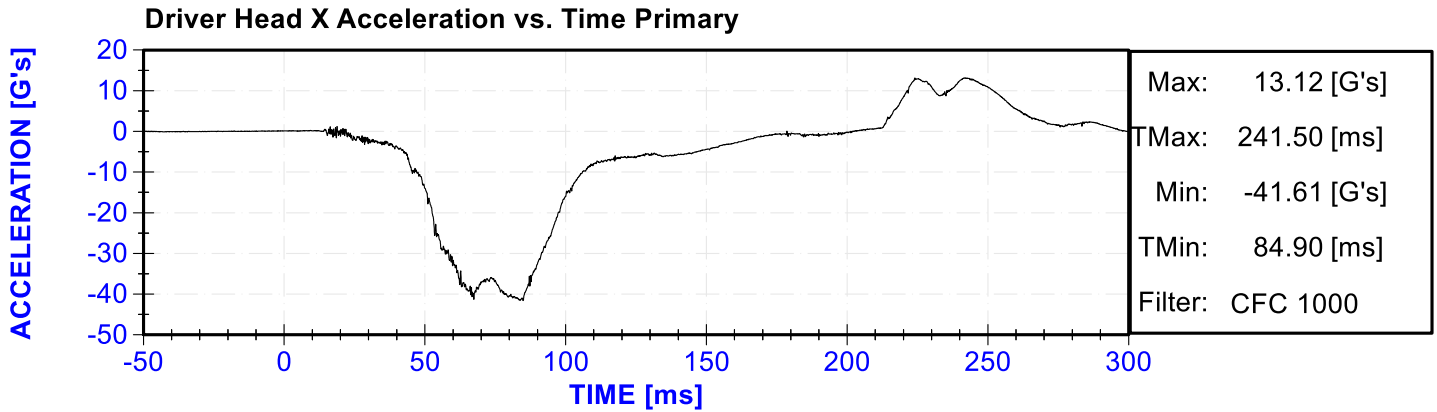


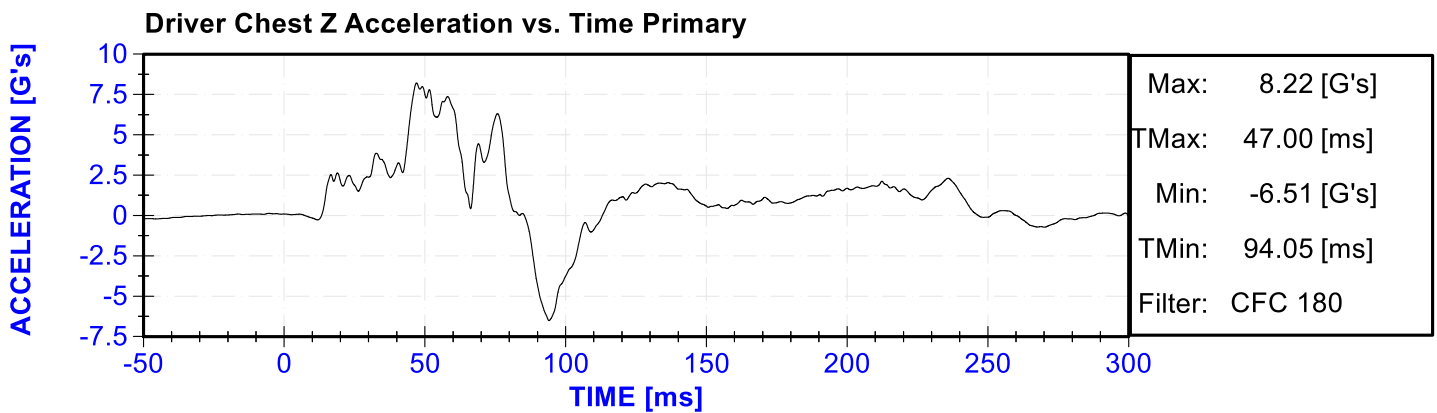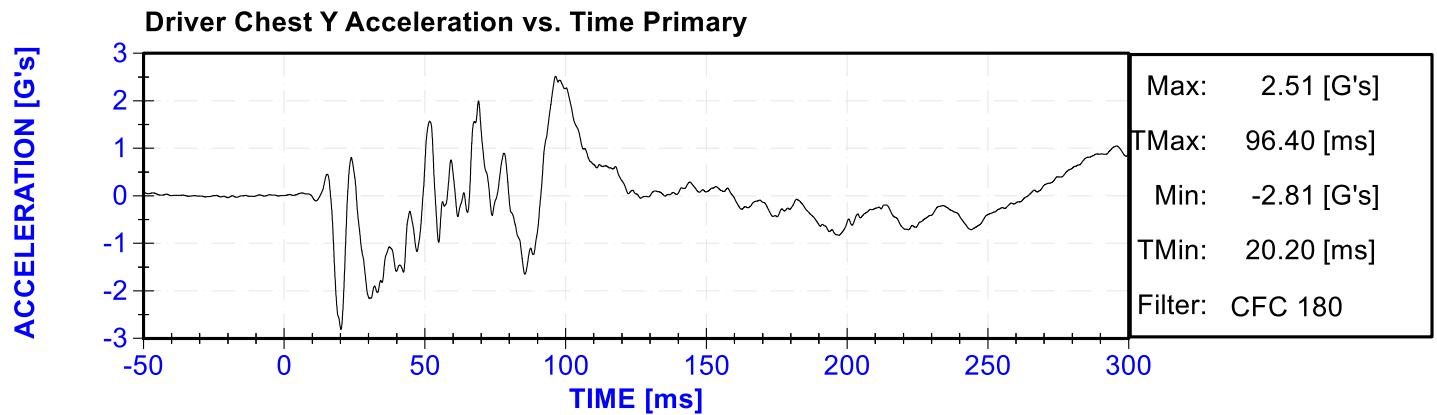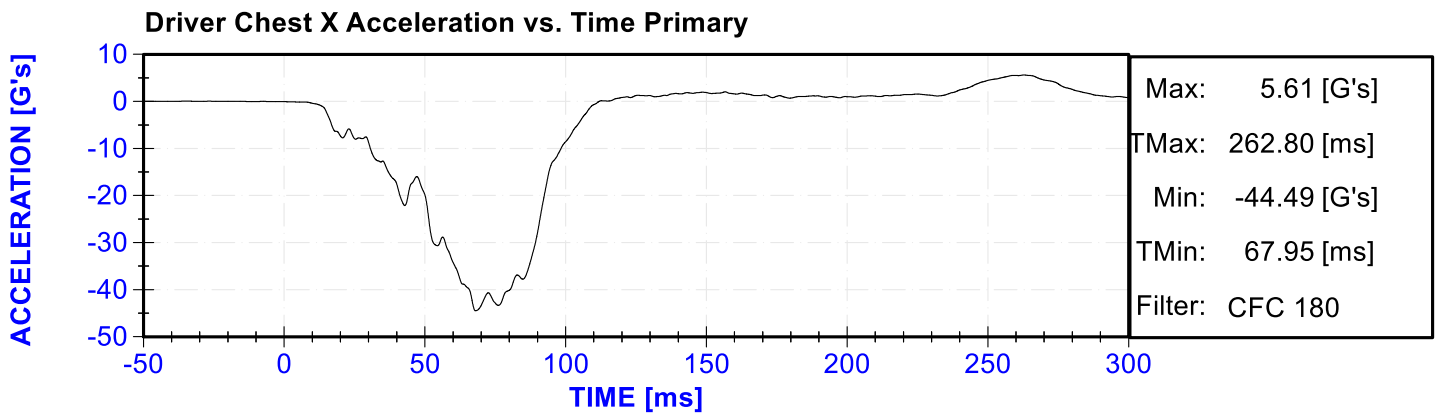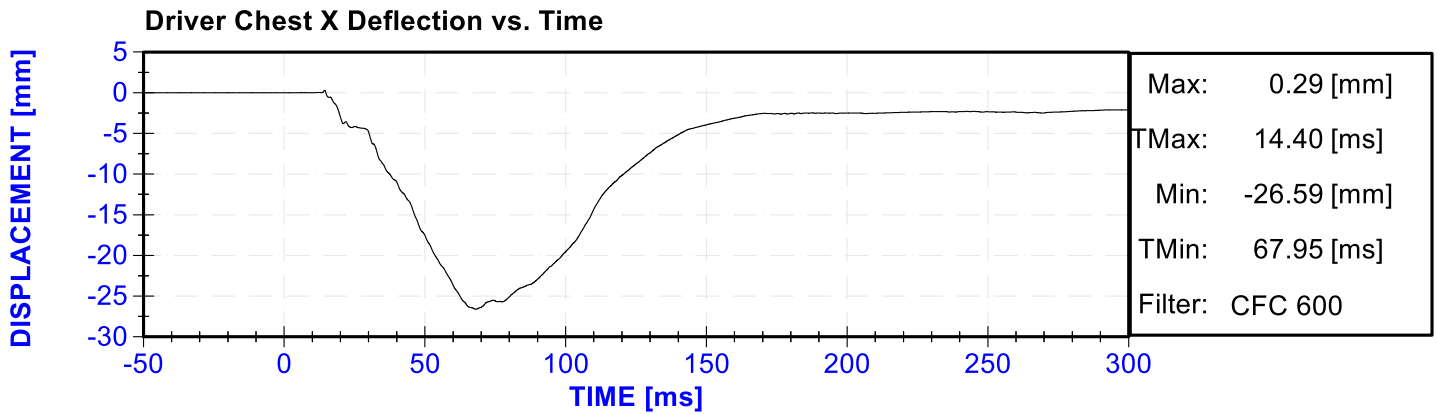


Driver Chest Resultant Acceleration vs. Time Primary

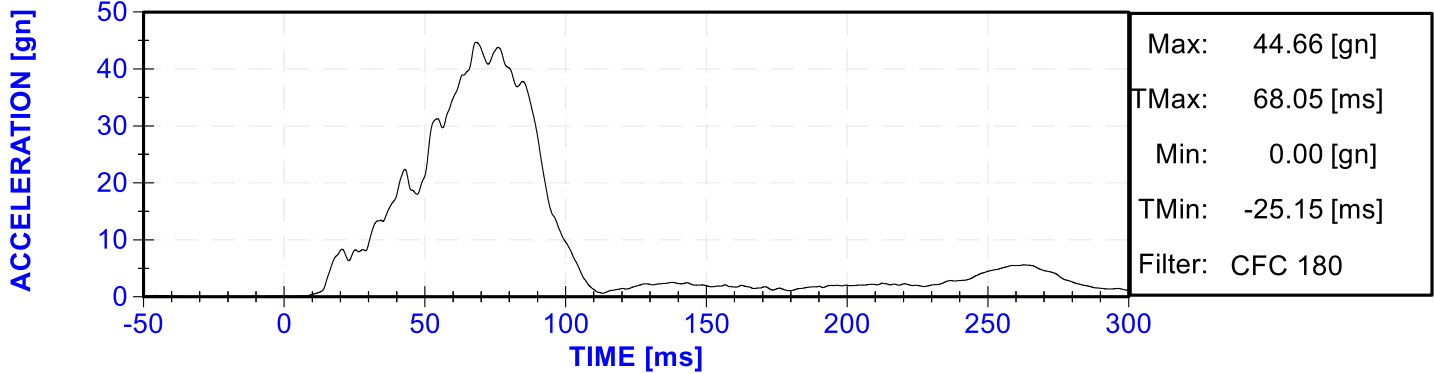


Driver Upper Neck Force X vs. Time Primary




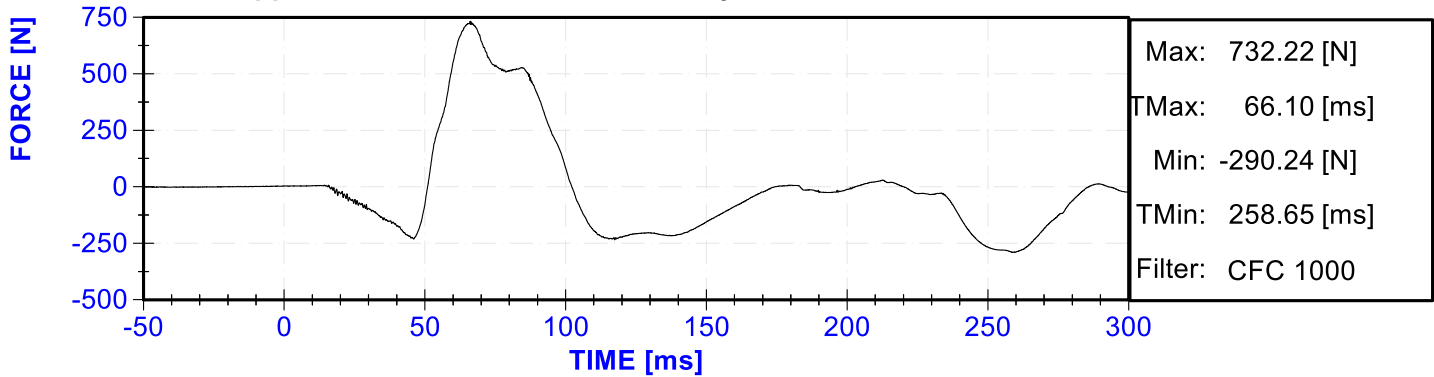






Driver Upper Neck Force Z vs. Time Primary




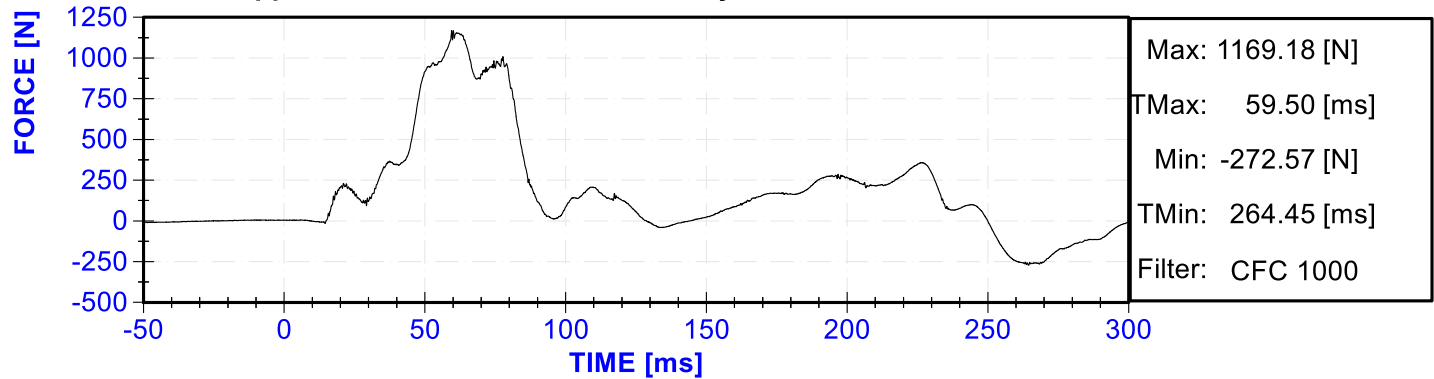


Driver Upper Neck Moment Y vs. Time Primary

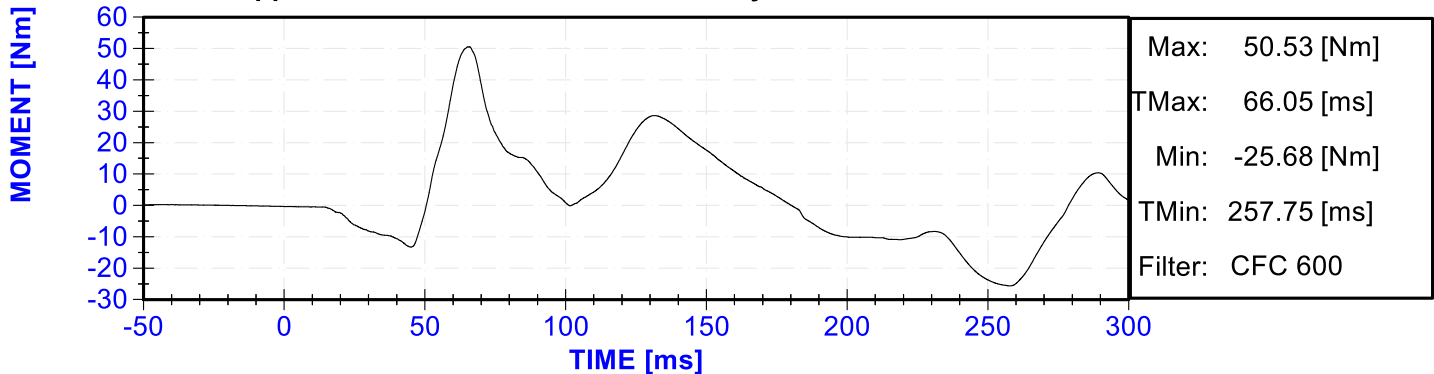

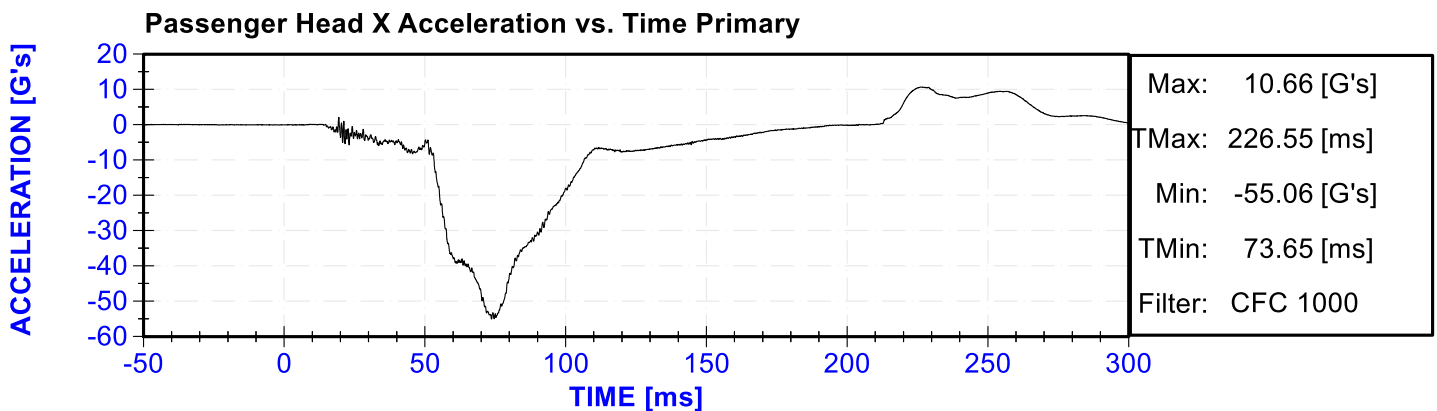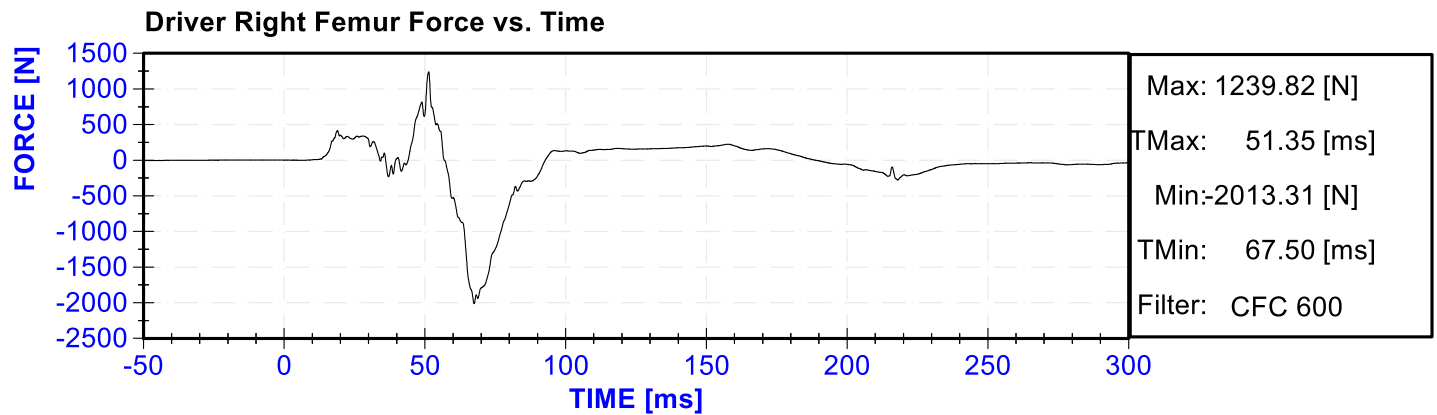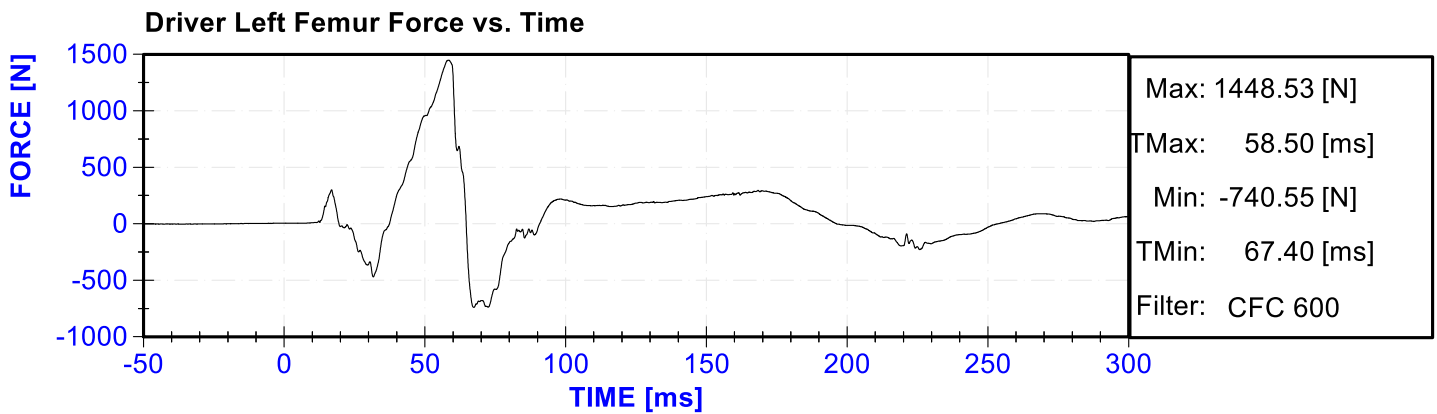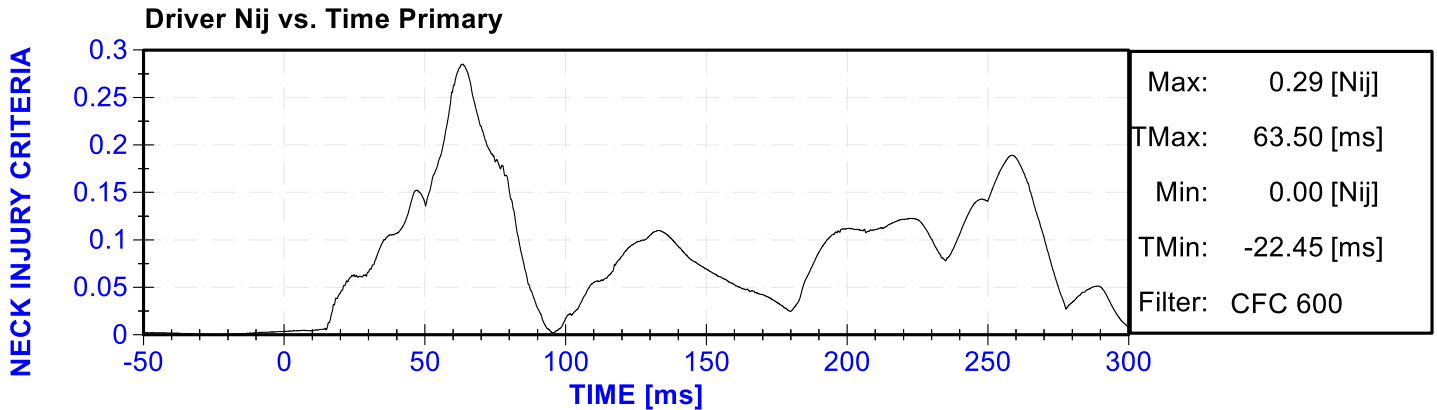


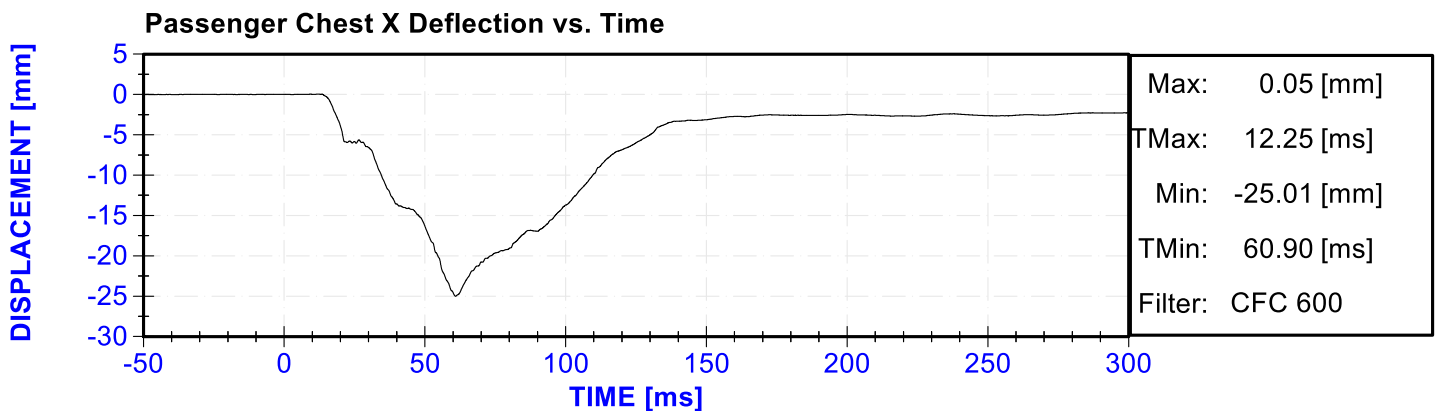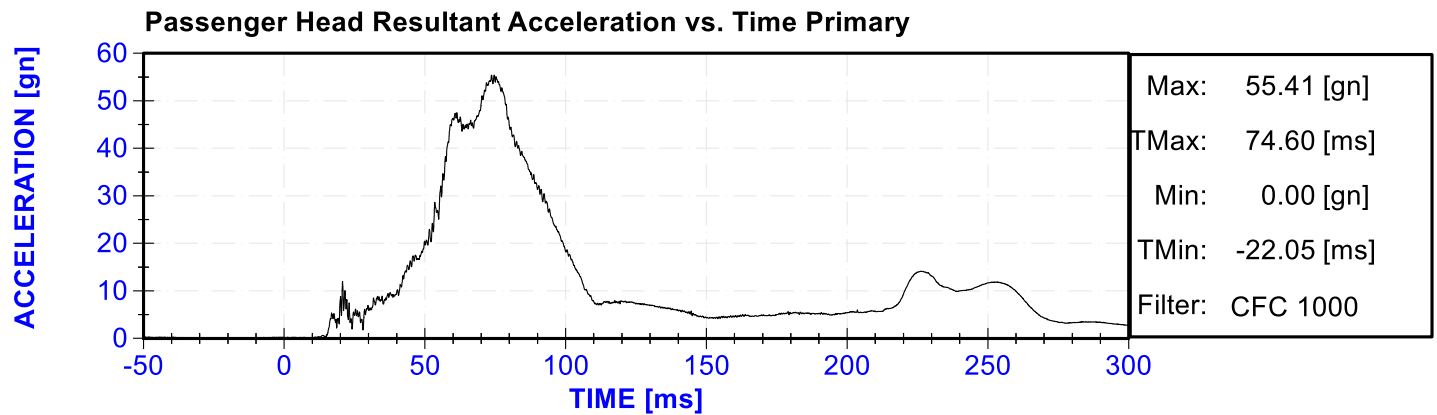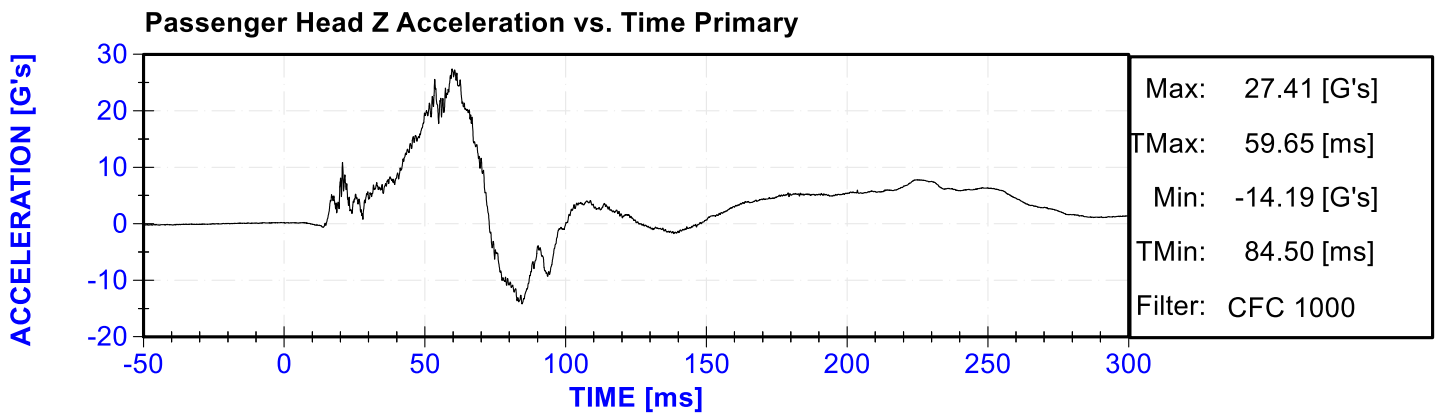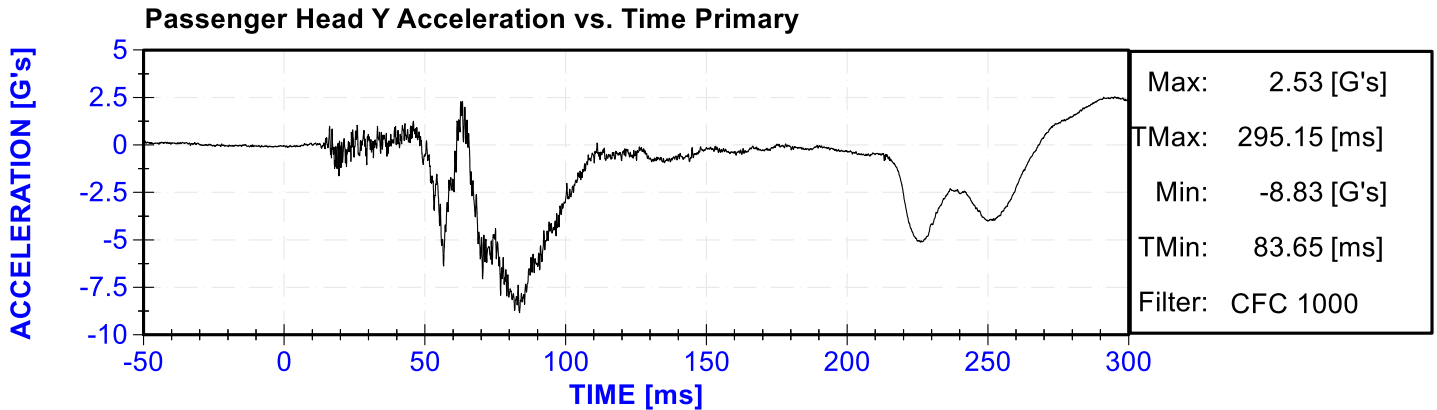

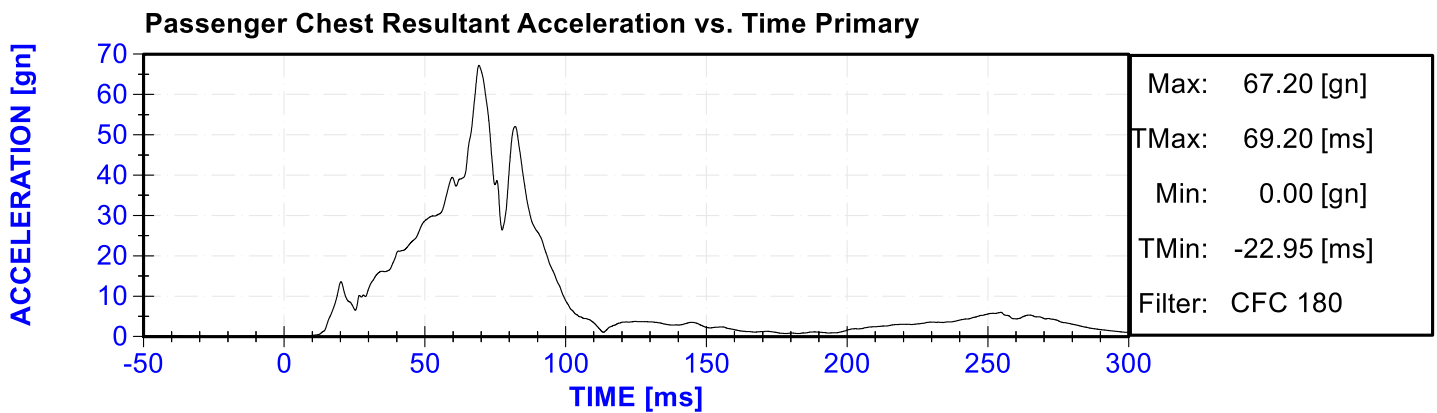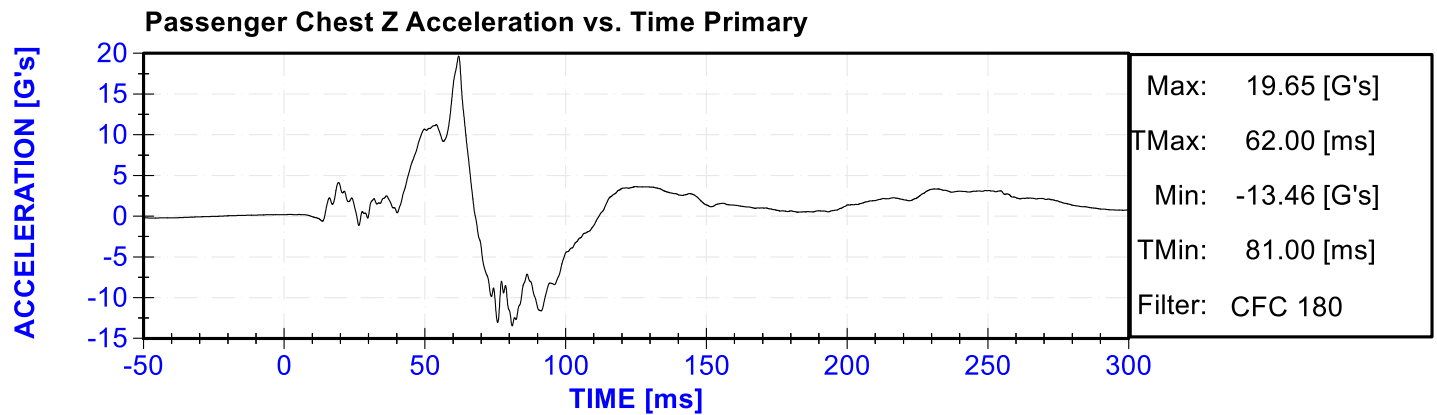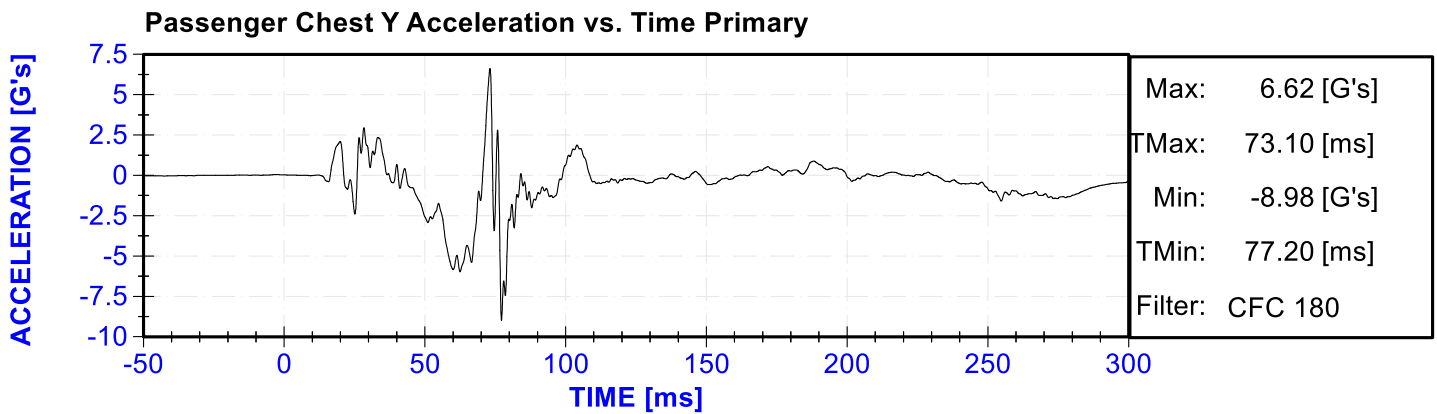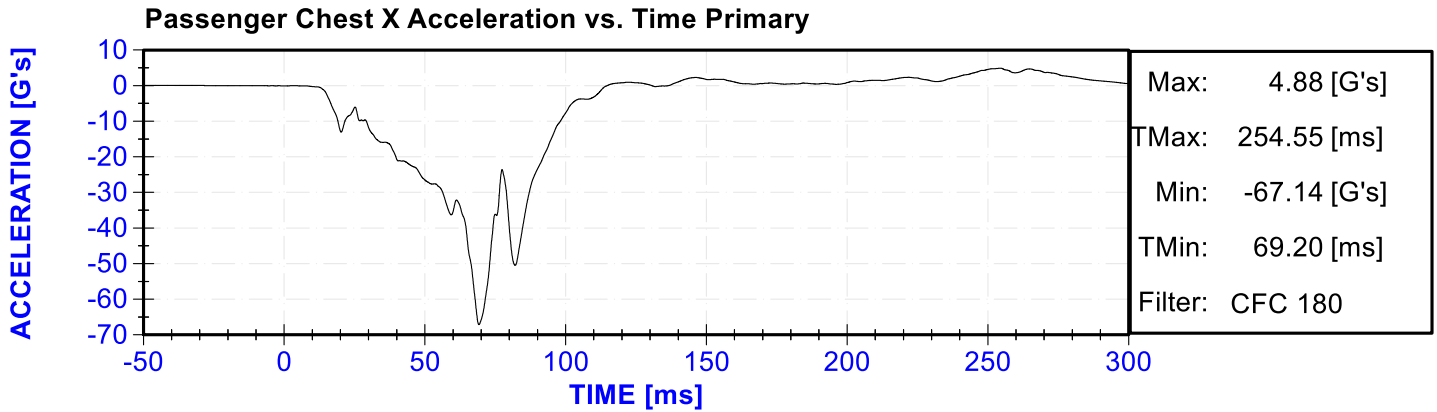





Passenger Upper Neck Force X vs. Time Primary

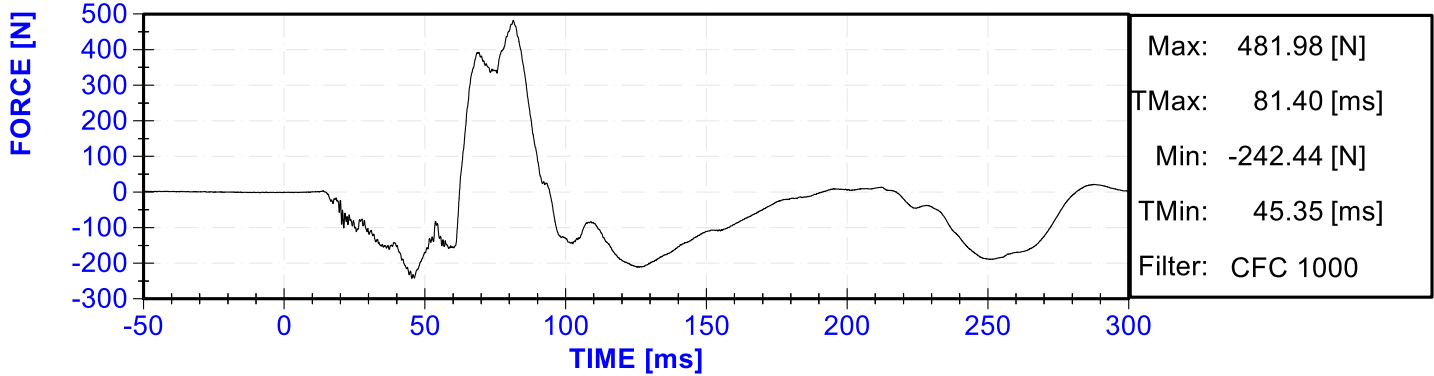


Passenger Upper Neck Force Z vs. Time Primary


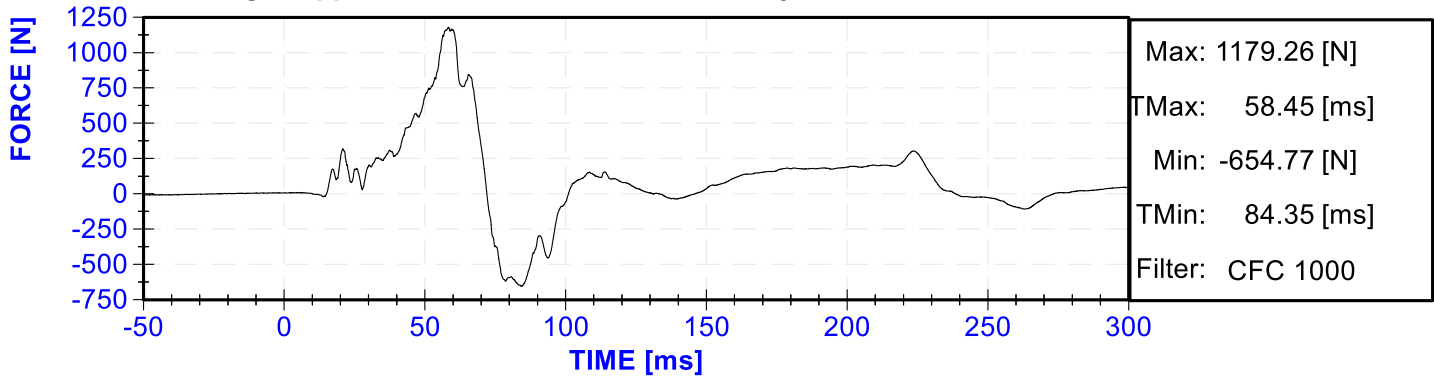


Passenger Upper Neck Moment Y vs. Time Primary

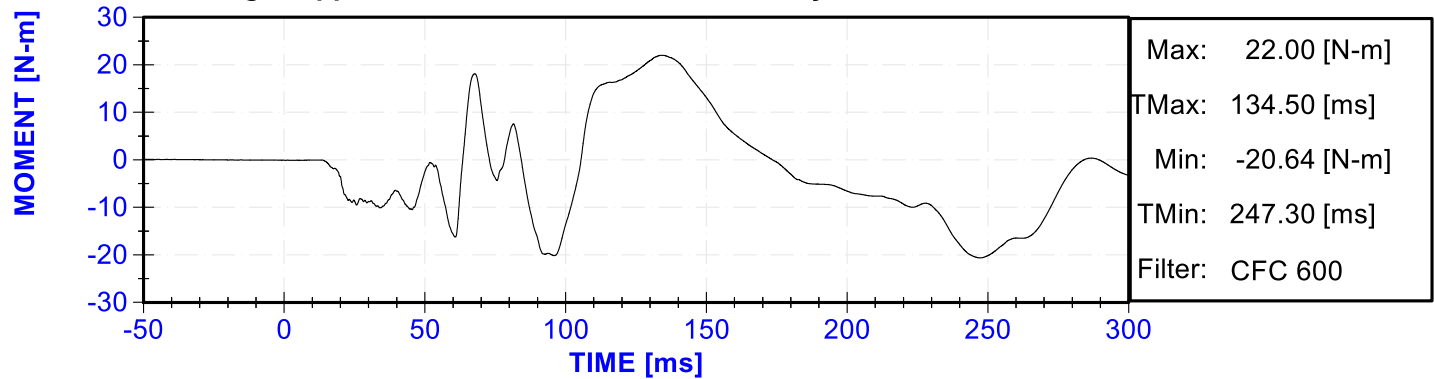

Passenger Nij vs. Time Primary

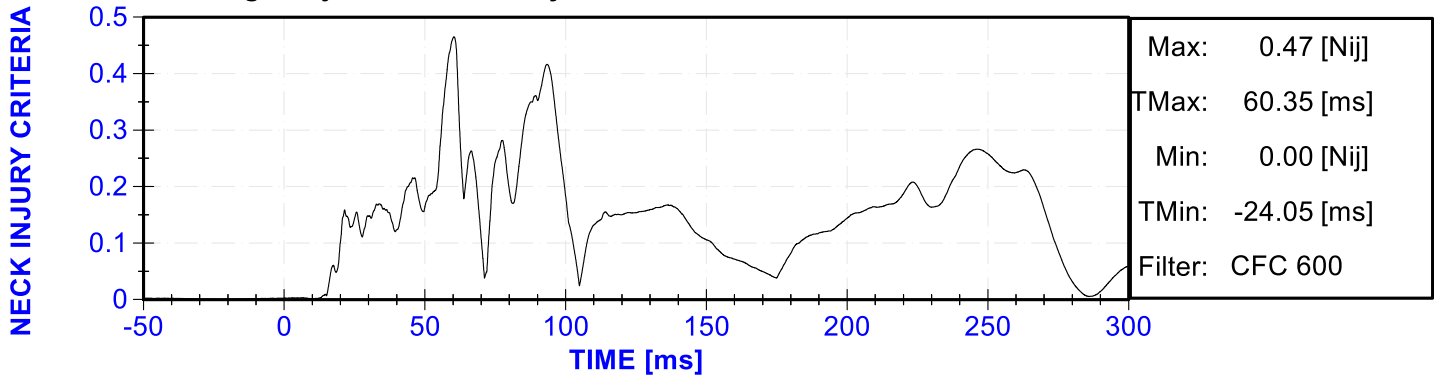

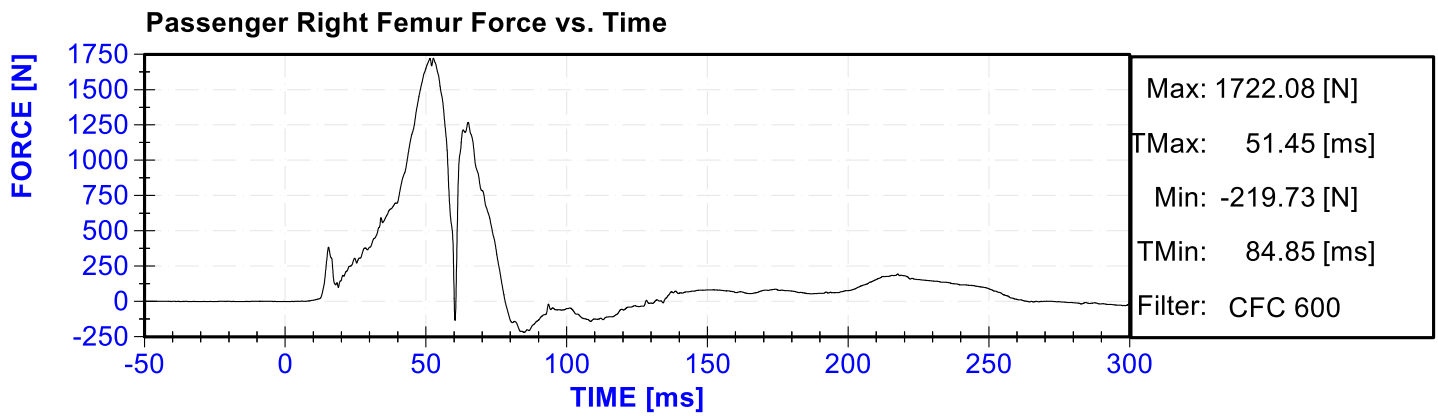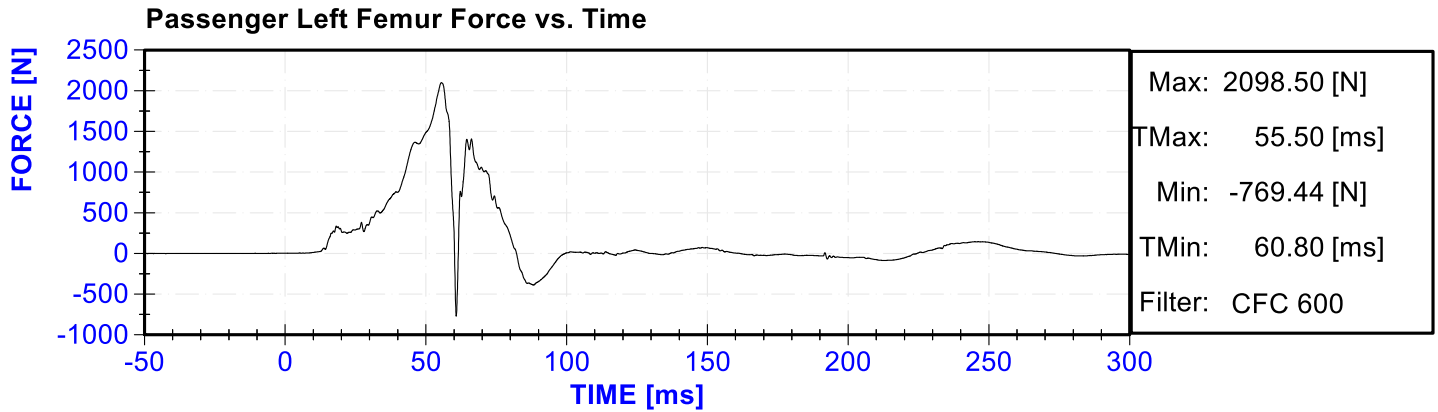

## APPENDIX C

### DUMMY CALIBRATION AND PERFORMANCE VERIFICATION DATA

**CALIBRATION TEST RESULTS**

**PRE-TEST**

**HYBRID III 50<sup>TH</sup> PERCENTILE MALE - DRIVER ATD**

**SERIAL NO: 142**




External Measurements - Hybrid 3 - 50th Male

Technician: K. Dutton

Date: 02/12/2020

Dummy Serial Number: 142

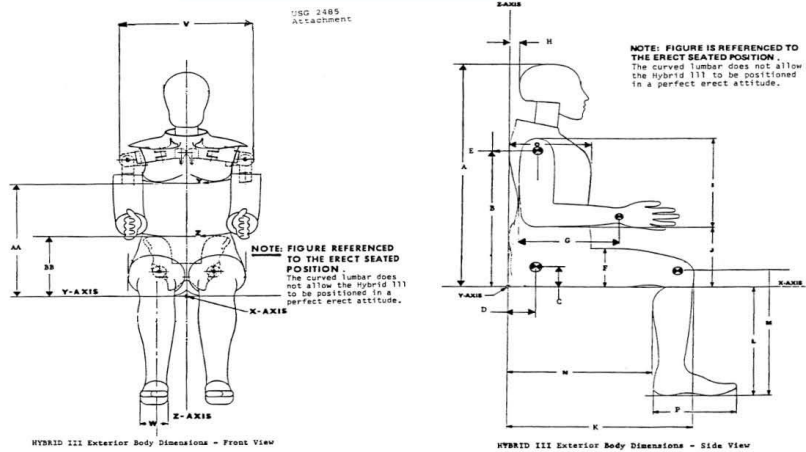

Symbol	Description	Specification (in)		Result (in)	Pass/Fail
A	Sitting Height	34.6	35.0	34.8	Pass
B	Shoulder Pivot Height	19.9	20.5	20.2	Pass
C	H-Point Height	3.3	3.5	3.4	Pass
D	H-Point from Backline	5.3	5.5	5.4	Pass
E	Shoulder Pivot from Backline	3.3	3.7	3.6	Pass
F	Thigh Clearance	5.5	6.1	5.8	Pass
G	Back of Elbow to Wrist Pivot	11.4	12.0	11.6	Pass
H	Head Back to Backline	1.6	1.8	1.7	Pass
I	Shoulder to Elbow Length	13.0	13.6	13.4	Pass
J	Elbow Rest Height	7.5	8.3	8.1	Pass
K	Buttock to Knee Length	22.8	23.8	23.4	Pass
L	Popliteal Height	16.9	17.9	17.3	Pass
M	Knee Pivot Height	19.1	19.7	19.5	Pass
N	Buttock Popliteal Length	17.8	18.8	18.4	Pass
O	Chest Depth without Jacket	8.4	9.0	8.7	Pass
P	Foot Length (right)	9.9	10.5	10.3	Pass
V	Shoulder Breadth	16.3	17.2	16.9	Pass
W	Foot Breadth	3.6	4.2	3.8	Pass
Y	Chest Circumference with Jacket	38.2	39.4	38.8	Pass
Z	Waist Circumference	32.9	34.1	33.7	Pass
AA	Reference Location (Chest Circumference)	16.9	17.1	17.0	Pass
BB	Reference Location (Waist Circumference)	8.9	9.1	9.0	Pass


ATD Manufacturer	Humanetics	Test Technician	E. Helenbrook
ATD Serial Number	142	Laboratory Supervisor	K. Brogan




**Results**

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	18.9	25.6	°C	21.1	Pass
Humidity	10	70	%	28.2	Pass
Resultant Acceleration	225	275	g's	255.4	Pass
Oscillation	0	10	%	8.6	Pass
Lateral Acceleration	-15	15	g's	-8.7	Pass

**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
X Accelerometer	Endevco	P51681	2/10/2020	8/10/2020
Y Accelerometer	Endevco	P64151	2/10/2020	8/10/2020
Z Accelerometer	Endevco	P52114	2/10/2020	8/10/2020

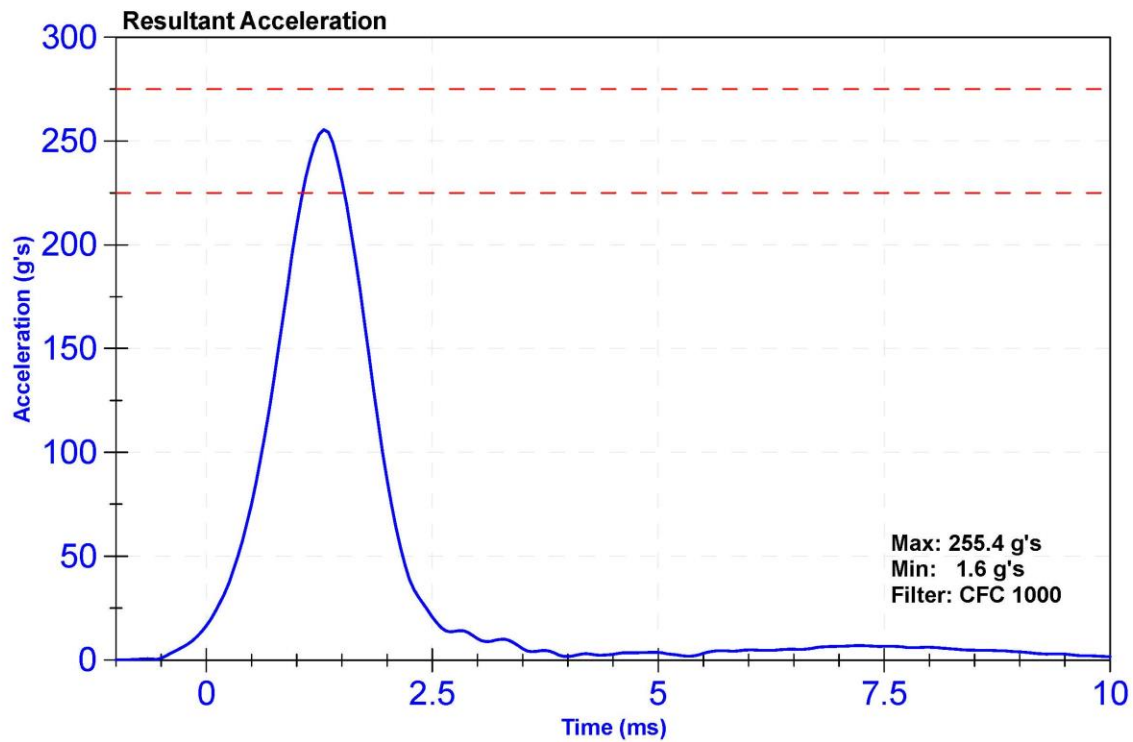

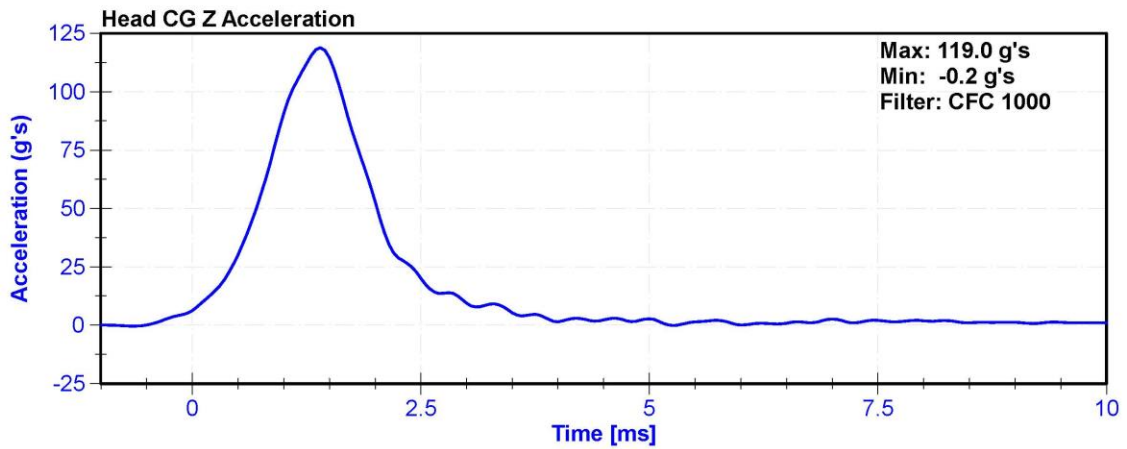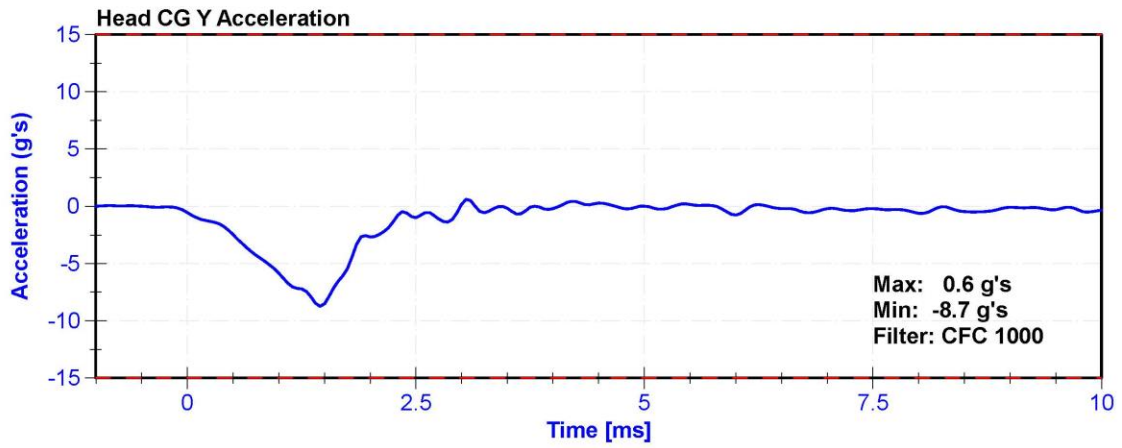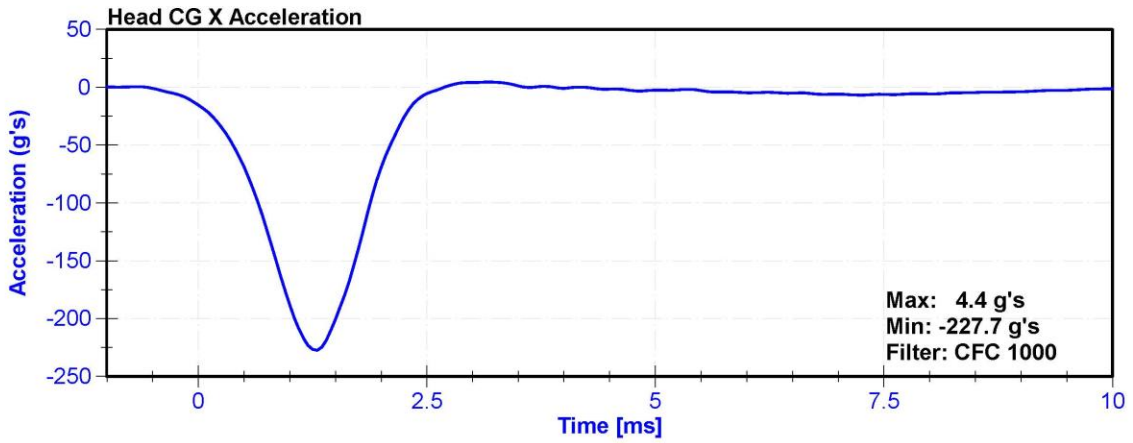

ATD Manufacturer	Humanetics	Test Technician	E. Helenbrook
ATD Serial Number	142	Laboratory Supervisor	K. Brogan



**Results**




Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21.5	Pass
Humidity	10	70	%	22.0	Pass
Velocity	6.89	7.13	m/s	6.903	Pass
Pendulum Deceleration at 10ms	22.5	27.5	g's	25.88	Pass
Pendulum Deceleration at 20ms	17.6	22.6	g's	21.26	Pass
Pendulum Deceleration at 30ms	12.5	18.5	g's	15.50	Pass
Max. Pendulum Deceleration After 30ms	0	29	g's	26.1	Pass
Pendulum Deceleration Time to 5 g's	34	42	ms	40.3	Pass
Maximum D Plane Rotation	64	78	deg	72.1	Pass
Time to Maximum Rotation	57	64	ms	62.4	Pass
Rotation Decay to Zero	113	127	ms	118.9	Pass
Moment About Occipital Condyle	88.1	108.4	Nm	92.35	Pass
Time to Maximum Moment	47	58	ms	53.9	Pass
Moment Decay to Zero	97	107	ms	103.8	Pass

**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	ENDEVCO 7231CT	AC-AH5M9 Pend	1/30/2020	1/29/2021
Pendulum Potentiometer	ETI SP22G	DS-LABPOT1	9/13/2019	9/12/2020
Condyle Potentiometer	ETI SP22G	DS-LABPOT2	9/13/2019	9/12/2020
Upper Neck Load Cell	Denton 1716	17162019 FX	2/18/2019	2/18/2020



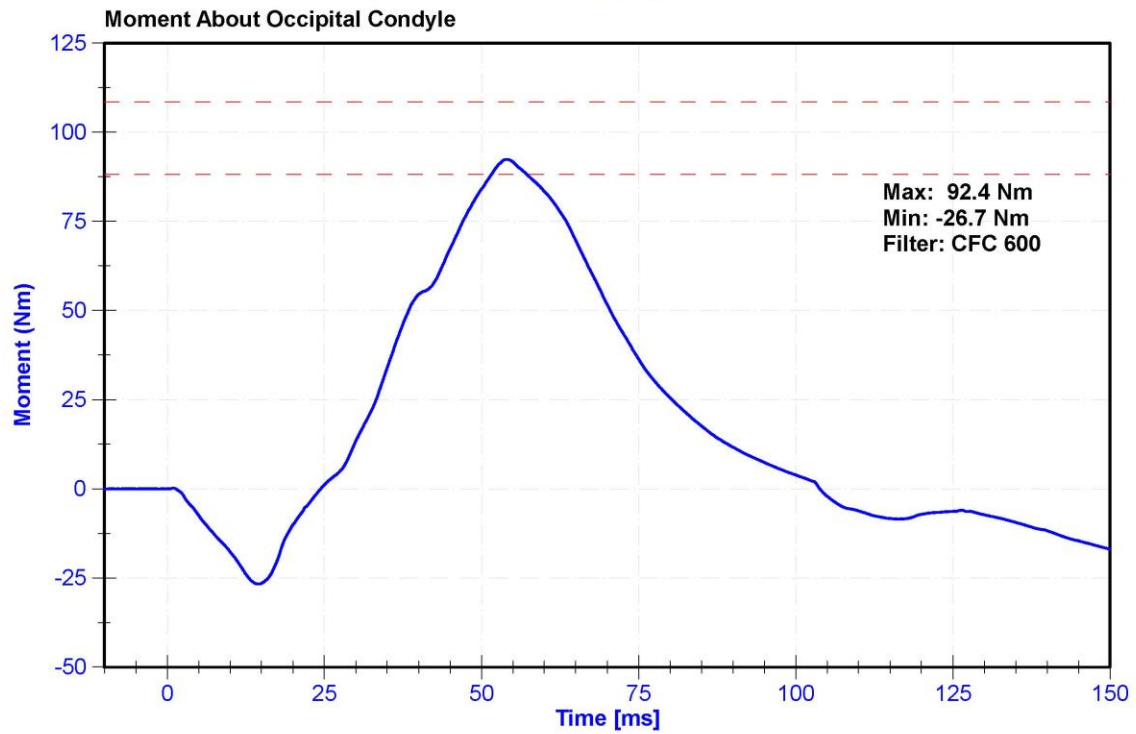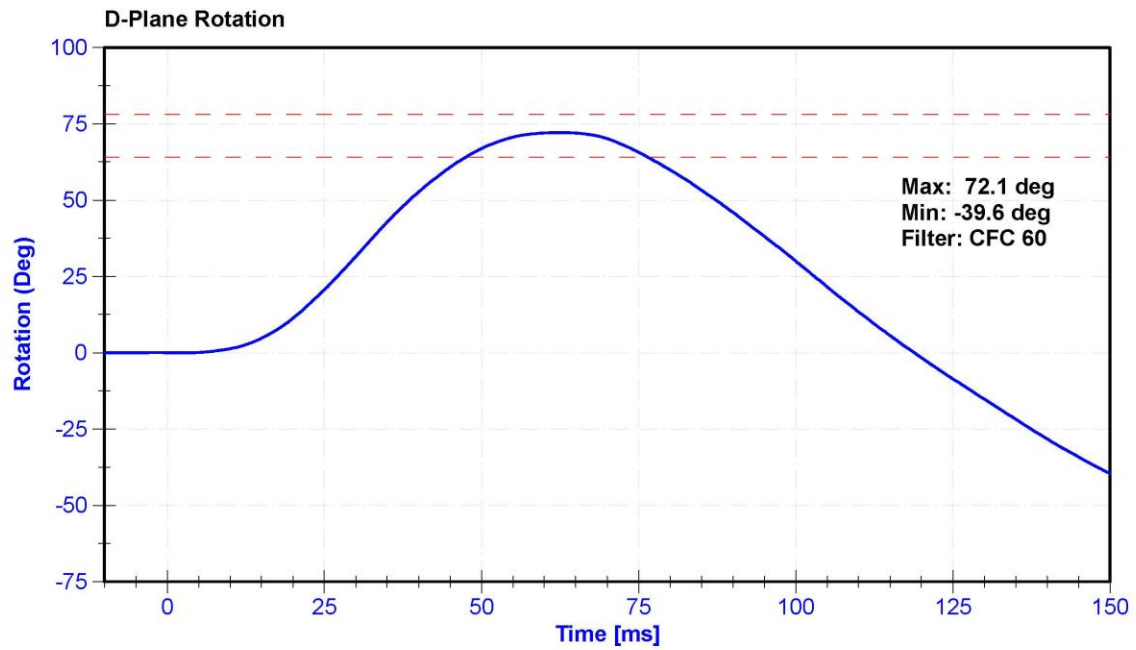

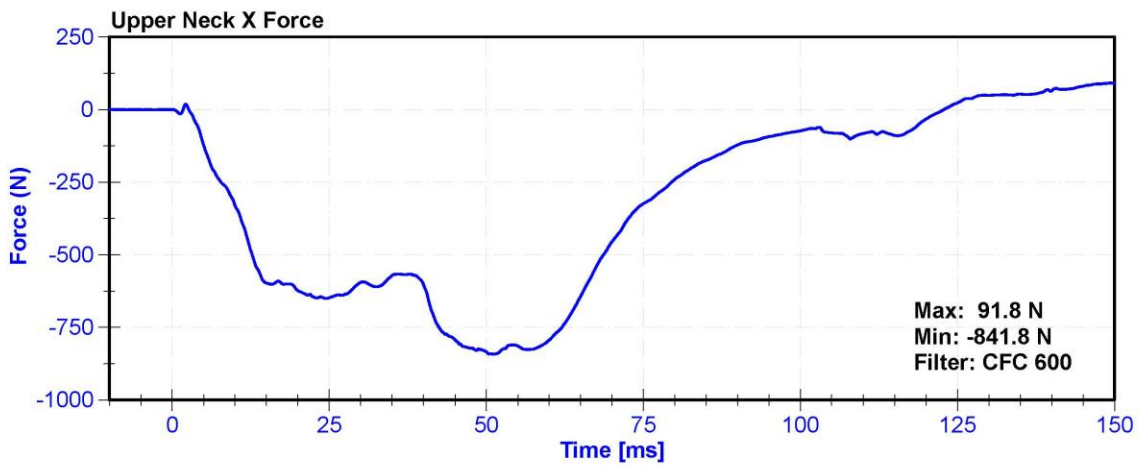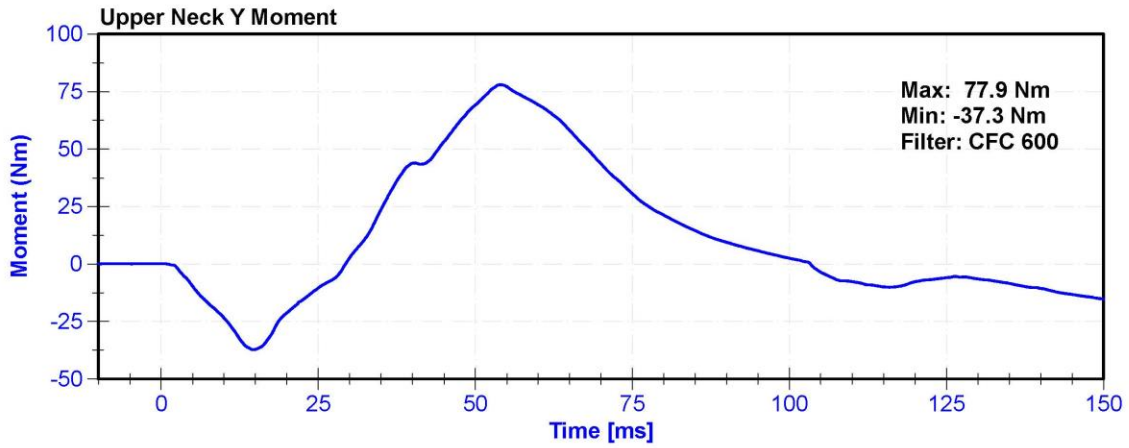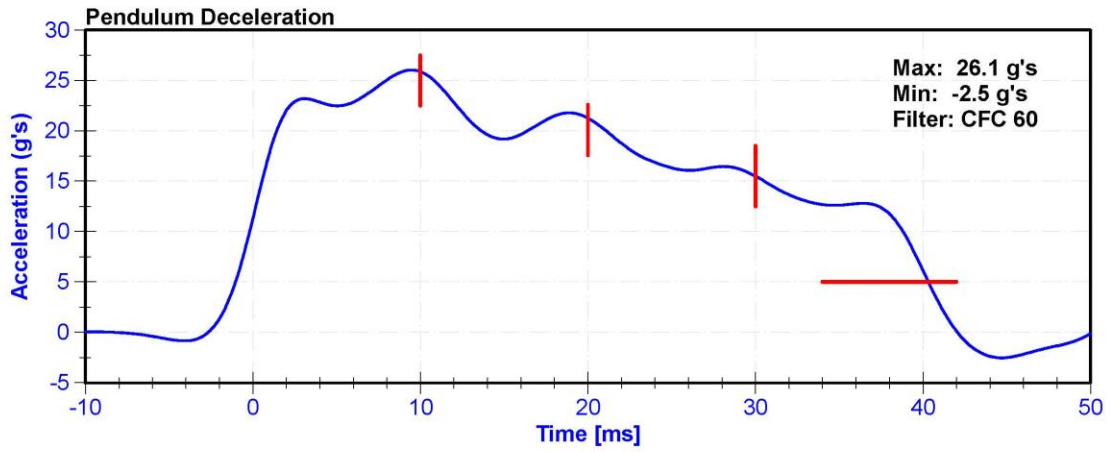



ATD Manufacturer	Humanetics	Test Technician	E. Helenbrook
ATD Serial Number	142	Laboratory Supervisor	K. Brogan




**Results**

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21.5	Pass
Humidity	10	70	%	29.4	Pass
Velocity	5.94	6.19	m/s	5.964	Pass
Pendulum Deceleration at 10ms	17.2	21.2	g's	19.75	Pass
Pendulum Deceleration at 20ms	14	19	g's	18.0	Pass
Pendulum Deceleration at 30ms	11	16	g's	15.2	Pass
Max. Pendulum Deceleration After 30ms	0	22	g's	19.8	Pass
Pendulum Deceleration Time to 5 g's	38	46	ms	42.6	Pass
Maximum D Plane Rotation	81	106	deg	98.1	Pass
Time to Maximum Rotation	72	82	ms	78.0	Pass
Rotation Decay to Zero	147	174	ms	158.0	Pass
Minimum Moment About OC	-80	-52.9	Nm	-68.55	Pass
Time to Minimum Moment	65	79	ms	71.1	Pass
Moment Decay to Zero	120	148	ms	139.9	Pass

**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	ENDEVCO 7231CT	AC-AH5M9 Pend	1/30/2020	1/29/2021
Pendulum Potentiometer	ETI SP22G	DS-LABPOT1	9/13/2019	9/12/2020
Condyle Potentiometer	ETI SP22G	DS-LABPOT2	9/13/2019	9/12/2020
Upper Neck Load Cell	Denton 1716	17162019 FX	2/18/2019	2/18/2020

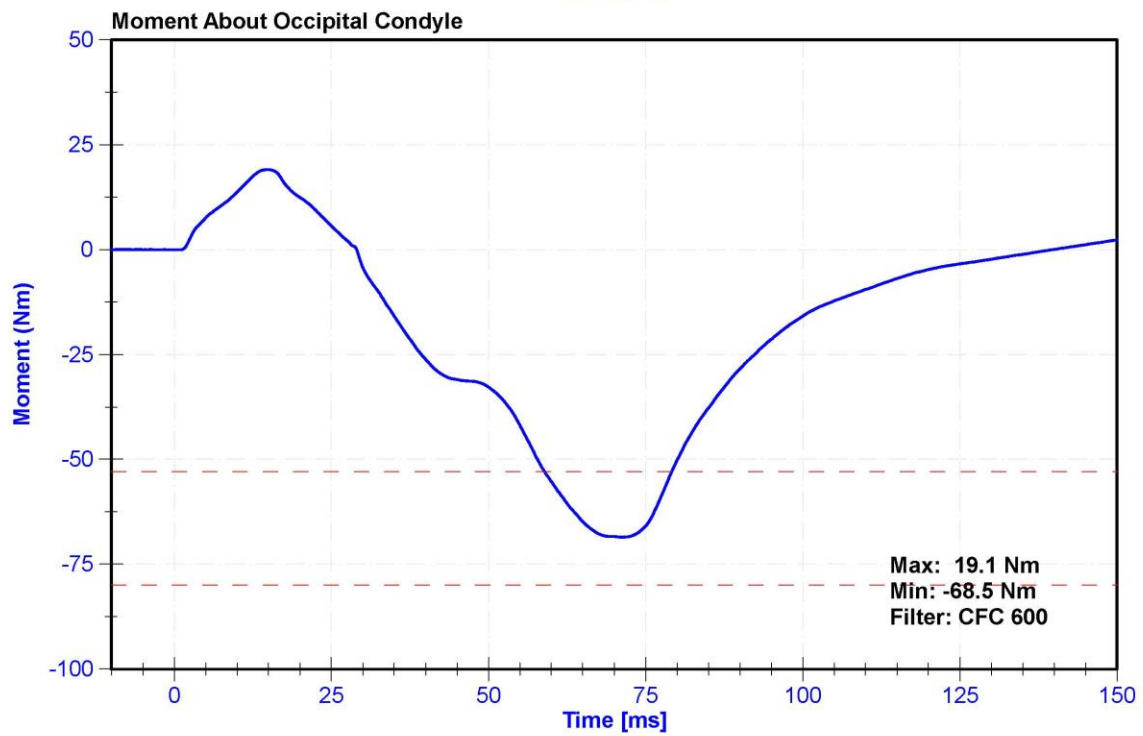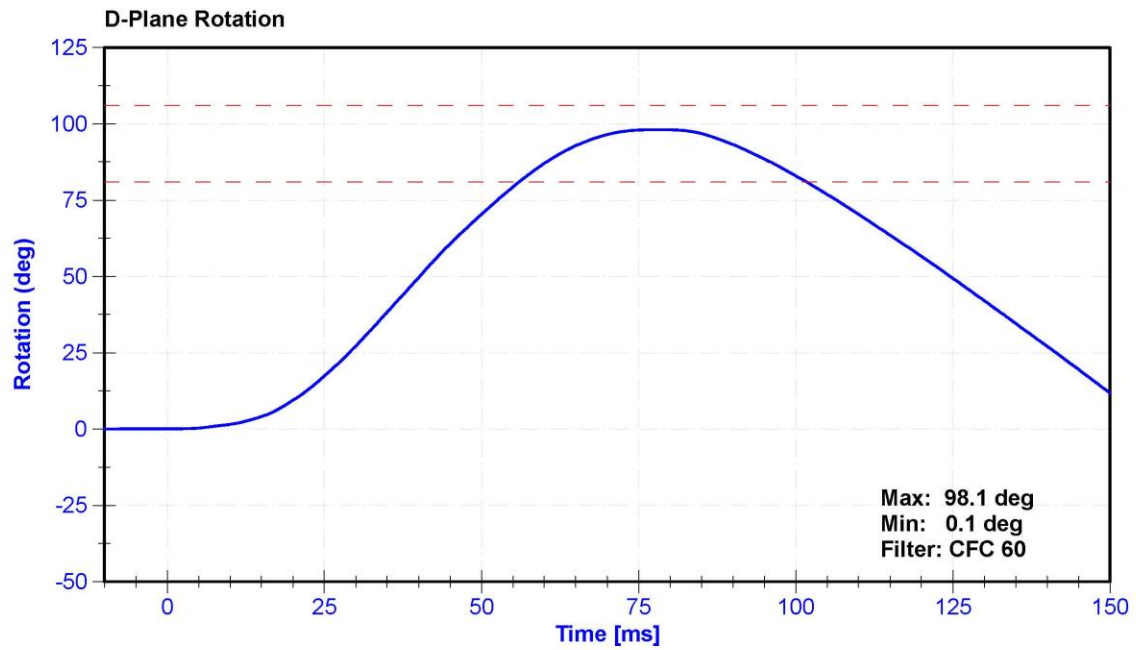

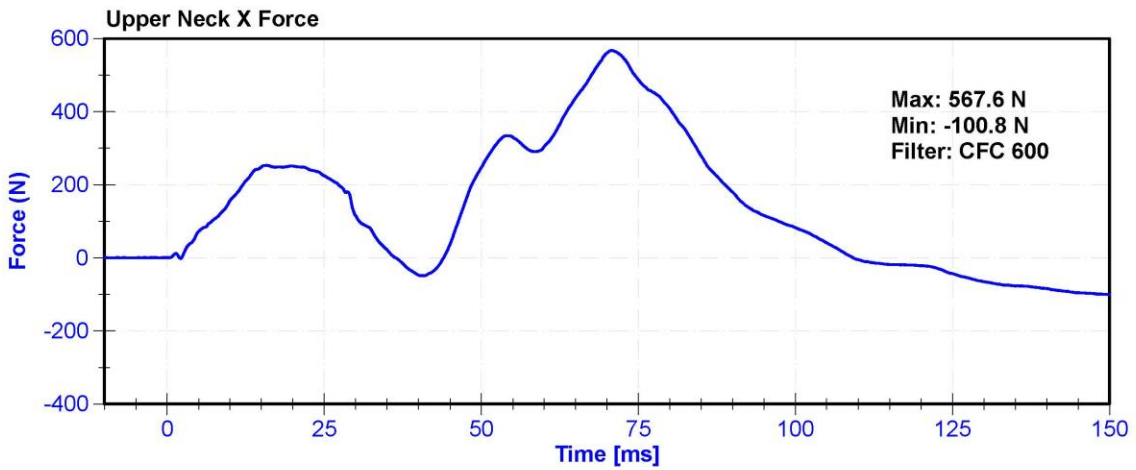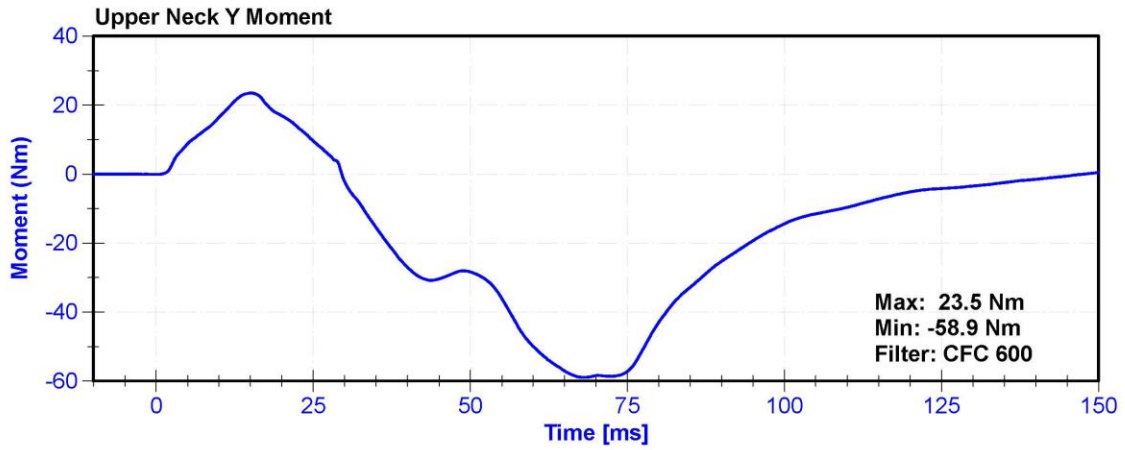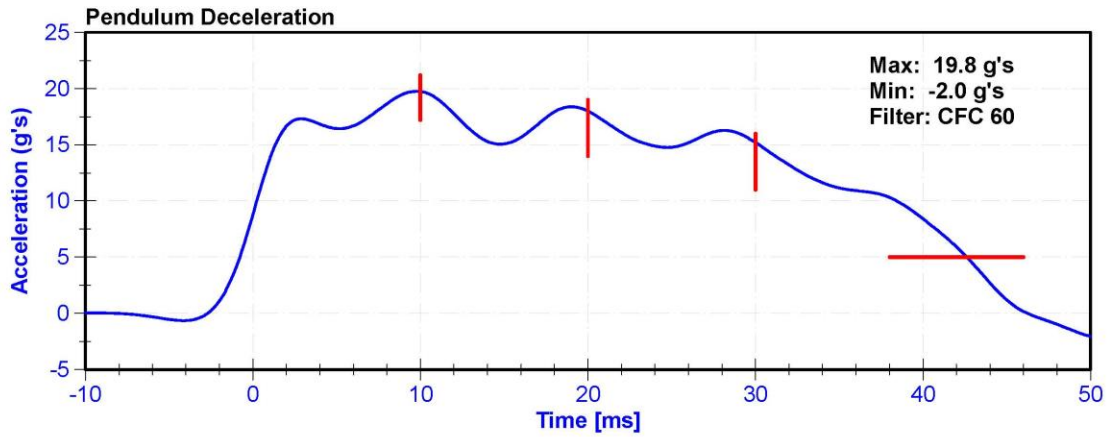


ATD Manufacturer	Humanetics	Test Technician	K. Dutton
ATD Serial Number	142	Laboratory Supervisor	K. Brogan



**Results**



Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21.3	Pass
Humidity	10	70	%	14.2	Pass
Velocity	6.59	6.83	m/s	6.743	Pass
Chest Displacement	-72.6	-63.5	mm	-69.30	Pass
Resistive Force	5160	5894	N	5702.4	Pass
Hysteresis	65	85	%	65.6	Pass

**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	MSI 64C-2000	A260568	1/29/2020	7/29/2020
Chest Potentiometer	JDK 6209-2038	DS-142	9/12/2019	9/11/2020

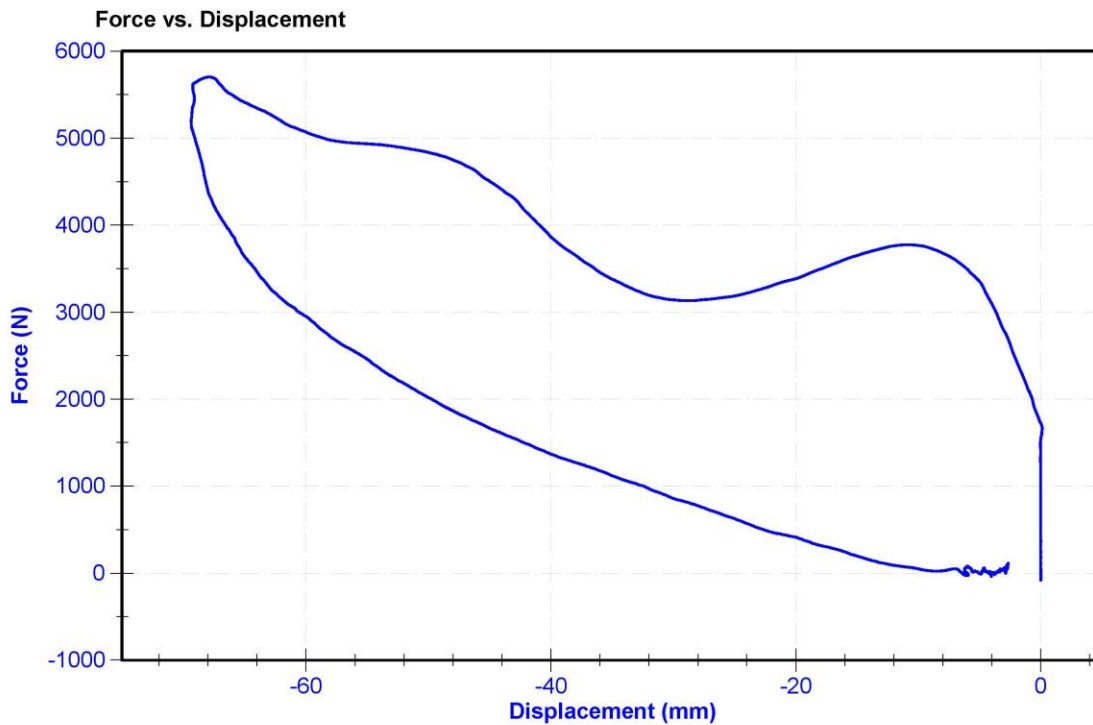

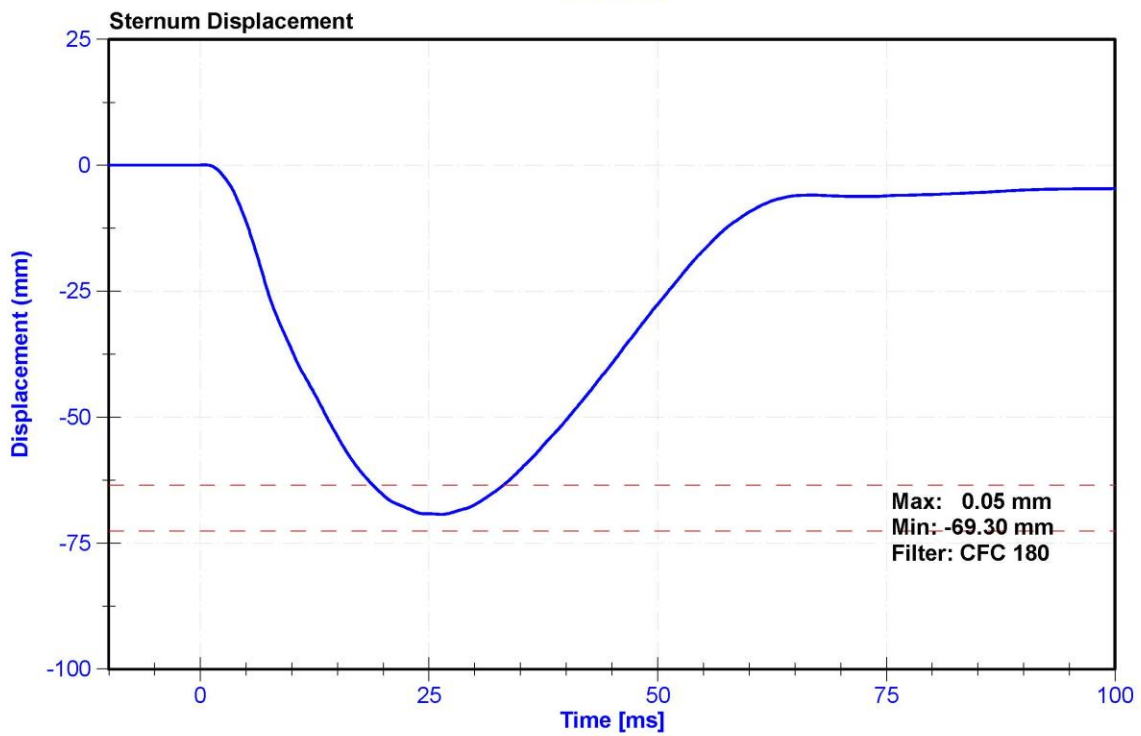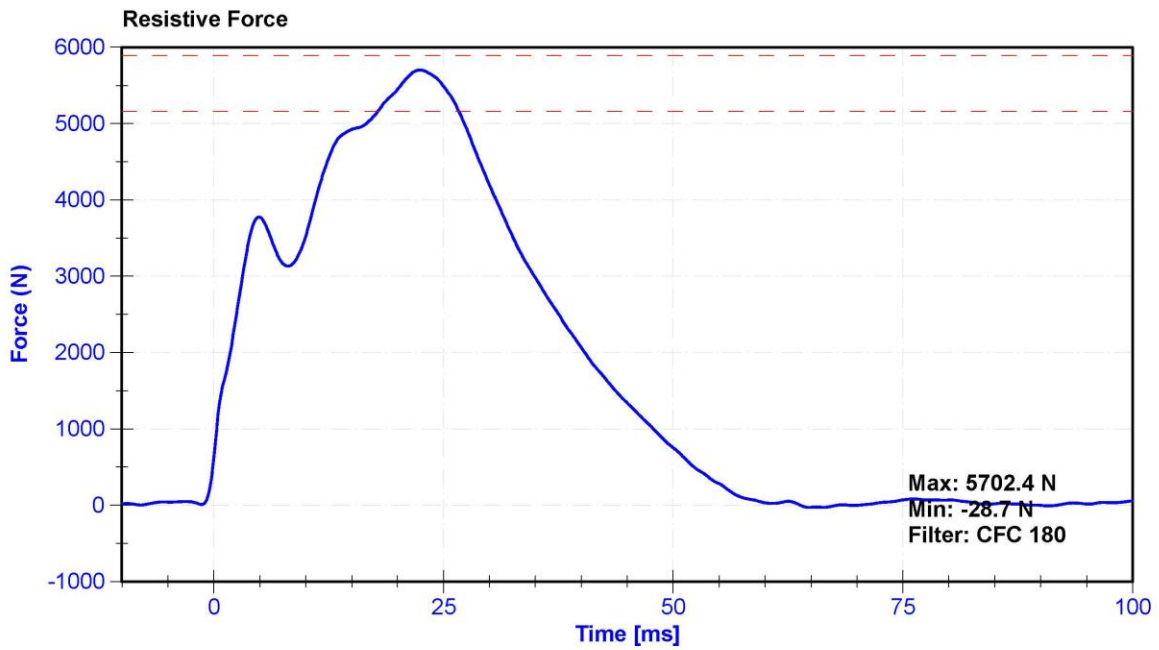

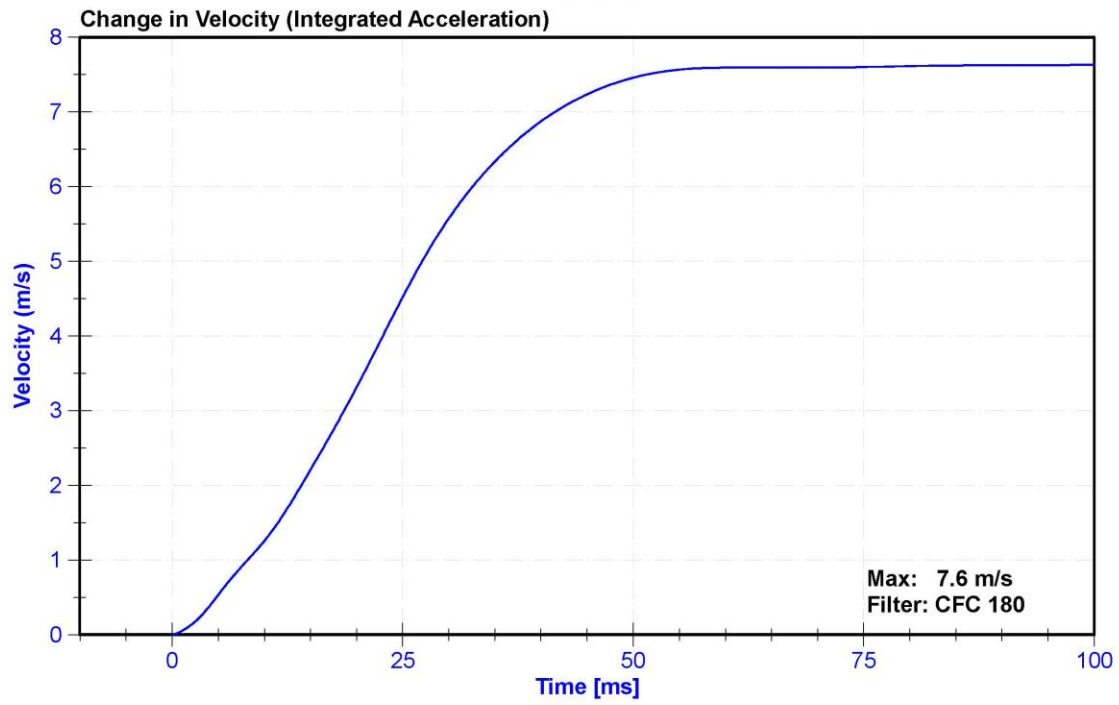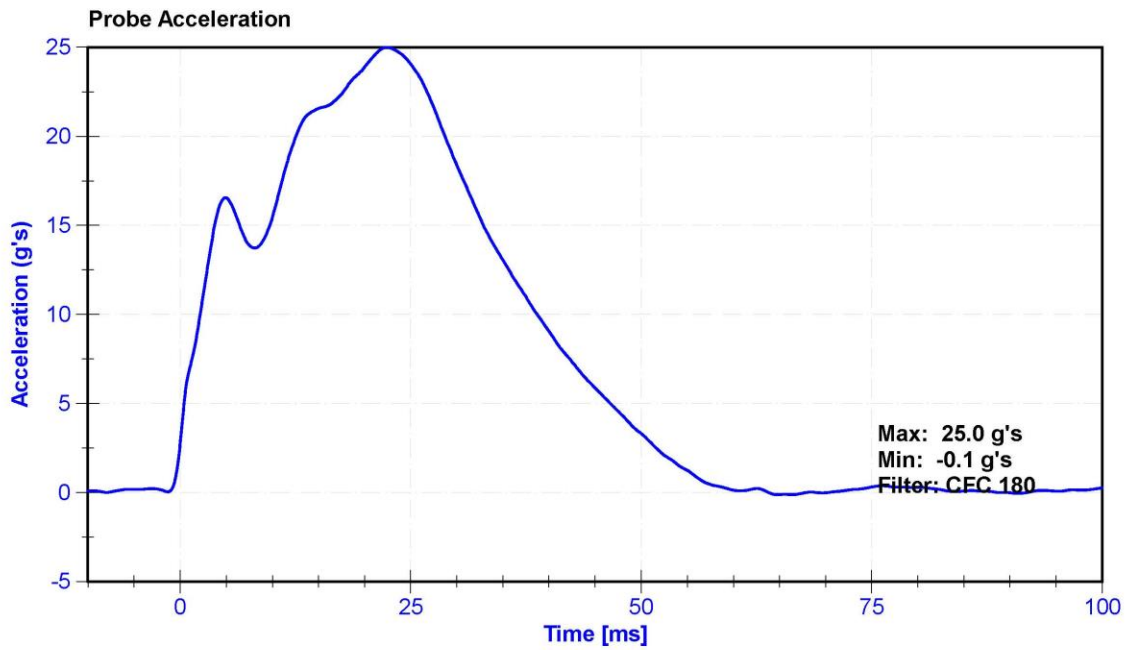




ATD Manufacturer	Humanetics	Test Technician	K. Dutton
ATD Serial Number	142	Laboratory Supervisor	K. Brogan

**Results**

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	18.9	25.6	°C	21.4	Pass
Humidity	10	70	%	19.4	Pass
Average Velocity	5	10	deg/s	7.2	Pass
Angle at 203Nm	40	50	deg	49.0	Pass
Moment at 30 degrees	0	94.9	Nm	76.1	Pass

**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Potentiometer	ETI SP22	DS-0008	9/18/2019	9/17/2020
Load Cell	Key Trans 2301-02	LC-115 My	9/12/2019	9/11/2020

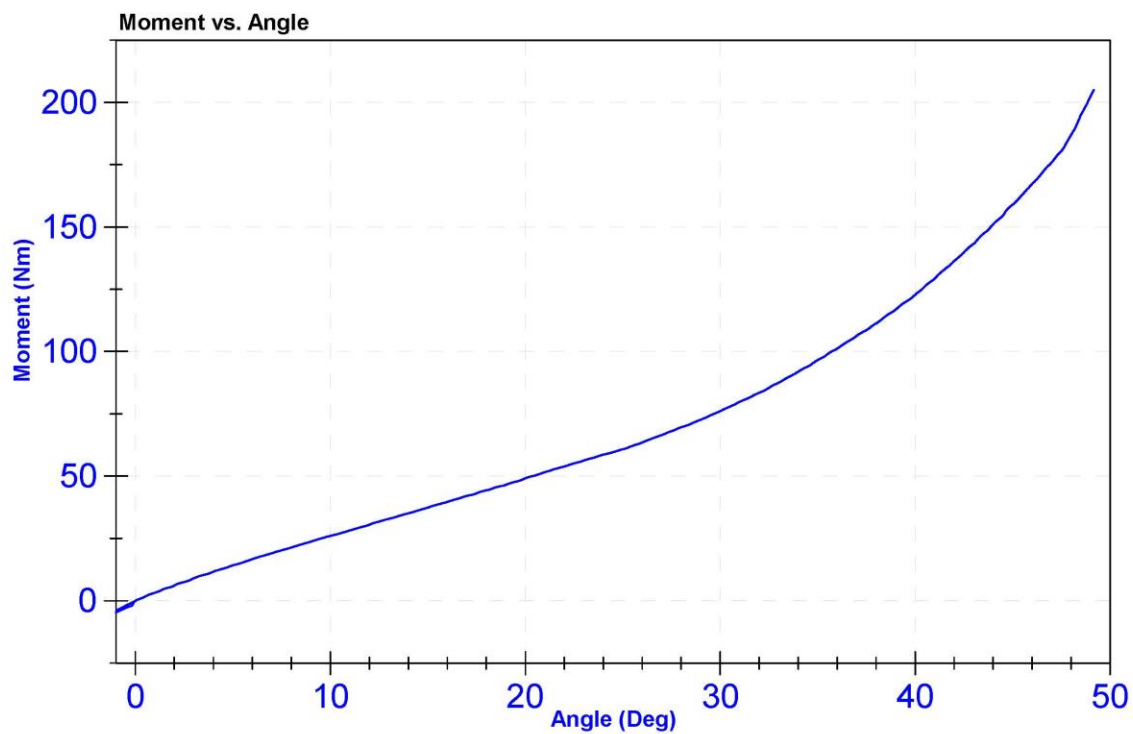


ATD Manufacturer	Humanetics	Test Technician	K. Dutton
ATD Serial Number	142	Laboratory Supervisor	K. Brogan

**Results**

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	18.9	25.6	°C	21.4	Pass
Humidity	10	70	%	19.4	Pass
Average Velocity	5	10	deg/s	7.3	Pass
Angle at 203Nm	40	50	deg	46.2	Pass
Moment at 30 degrees	0	94.9	Nm	84.5	Pass

**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Potentiometer	ETI SP22	DS-0008	9/18/2019	9/17/2020
Load Cell	Key Trans 2301-02	LC-115 My	9/12/2019	9/11/2020

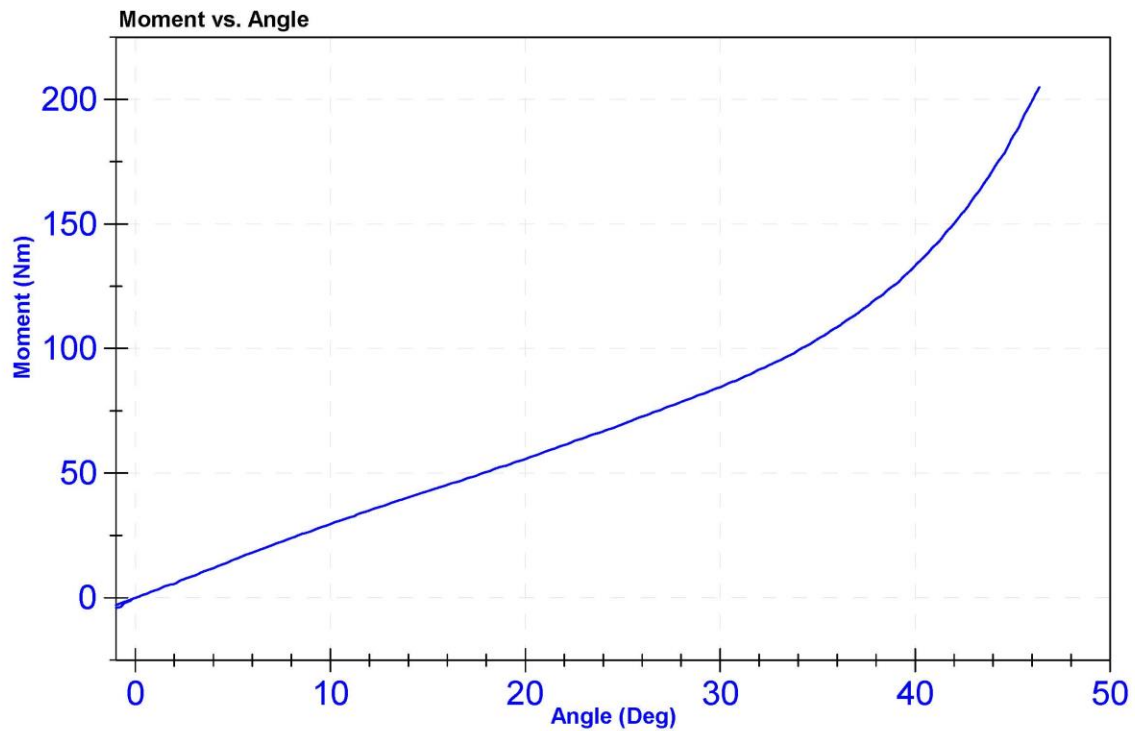


ATD Manufacturer	Humanetics	Test Technician	K. Dutton
ATD Serial Number	142	Laboratory Supervisor	K. Brogan



**Results**

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	18.9	25.6	°C	21	Pass
Humidity	10	70	%	19.6	Pass
Velocity	2.07	2.13	m/s	2.098	Pass
Maximum Resistive Force	4720	5780	N	5406.3	Pass

**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	MSI 64C-2000	A260568	1/29/2020	7/29/2020

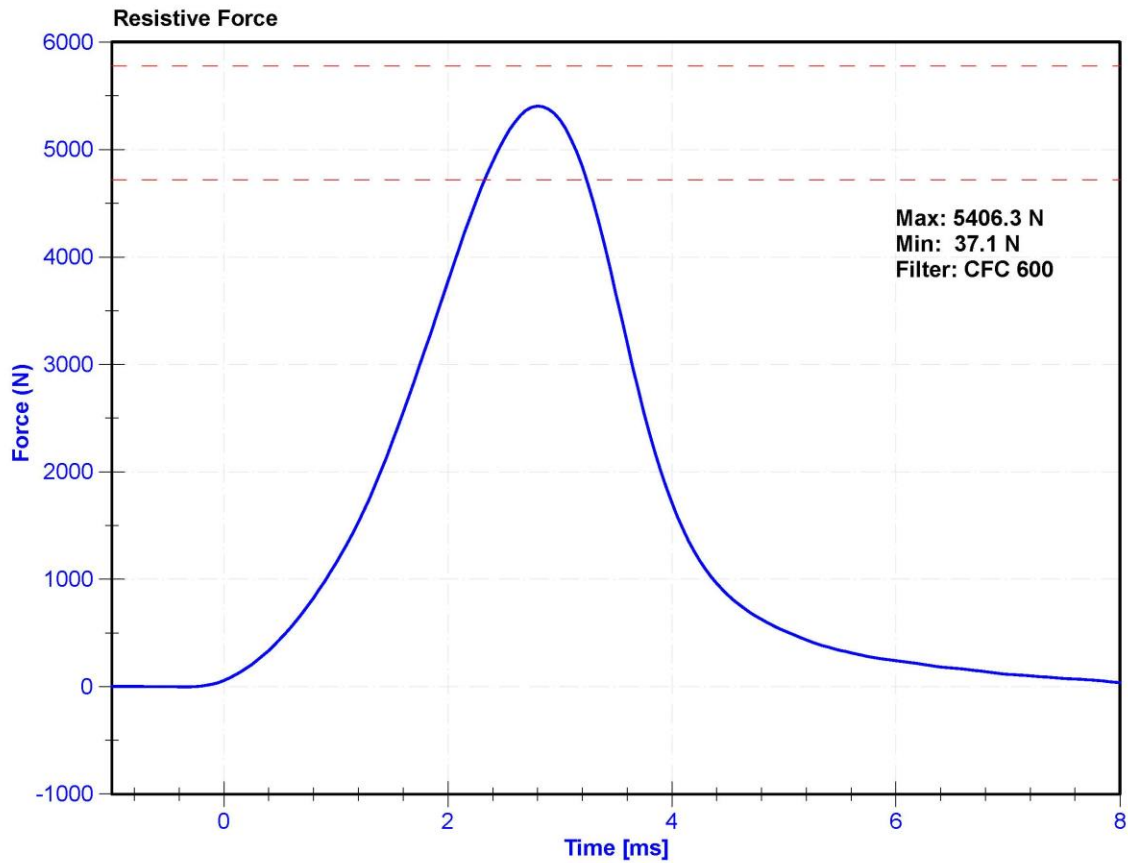

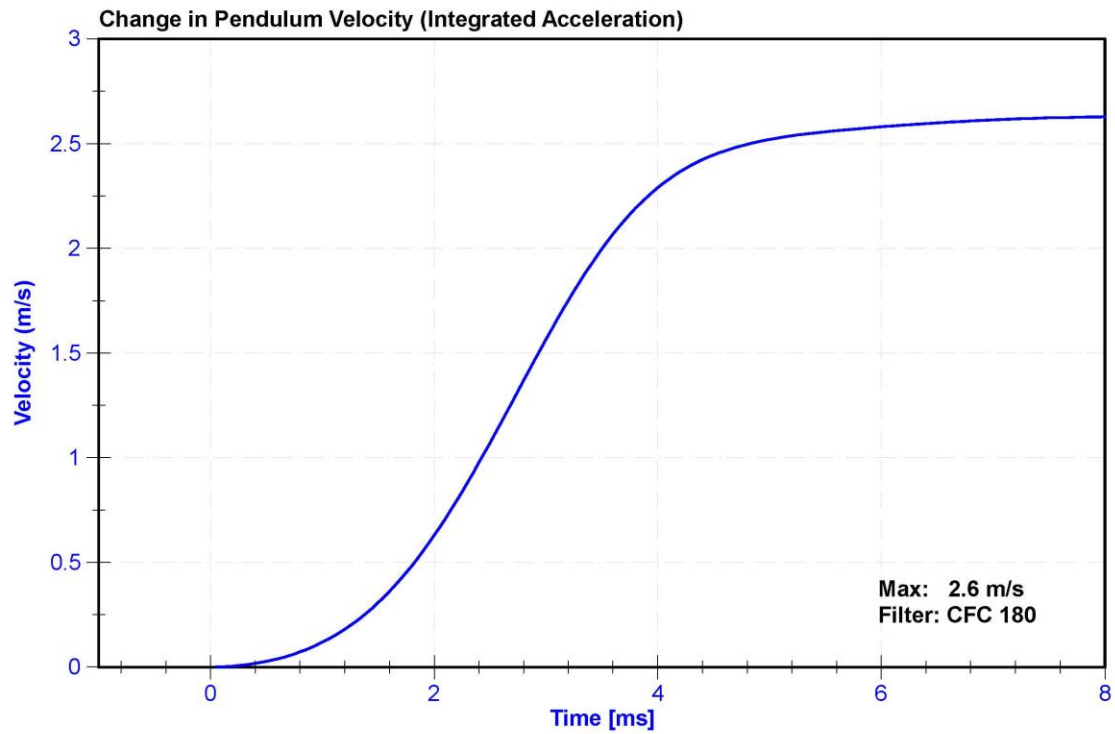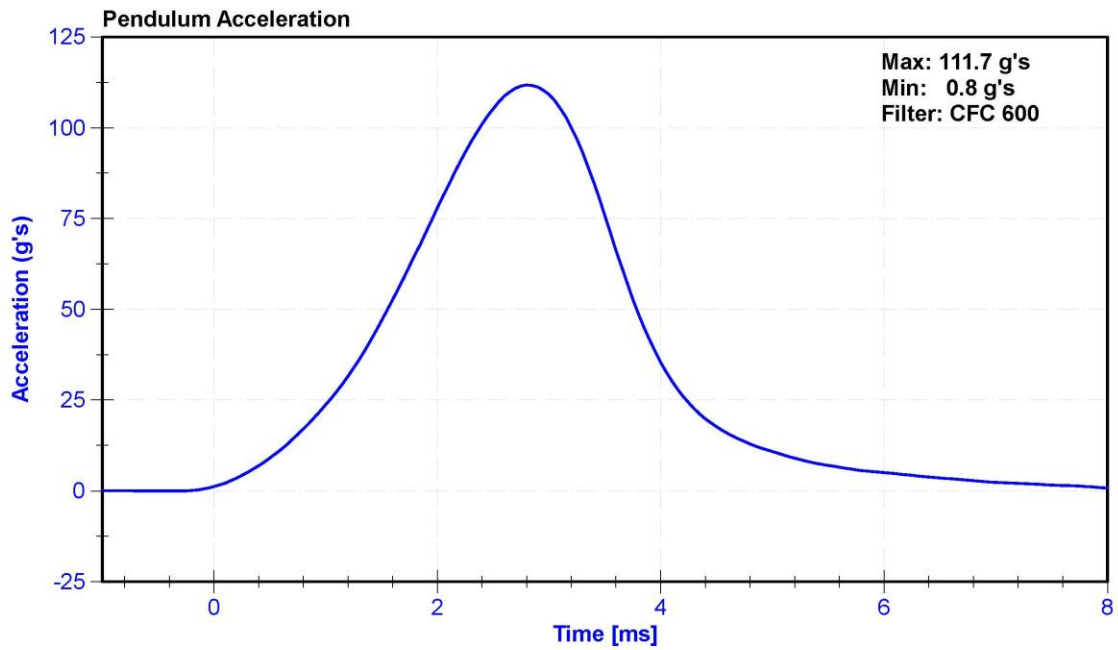


ATD Manufacturer	Humanetics	Test Technician	K. Dutton
ATD Serial Number	142	Laboratory Supervisor	K. Brogan



**Results**

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	18.9	25.6	°C	21.1	Pass
Humidity	10	70	%	19.5	Pass
Velocity	2.07	2.13	m/s	2.096	Pass
Maximum Resistive Force	4720	5780	N	5276.3	Pass

**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	MSI 64C-2000	A260568	1/29/2020	7/29/2020

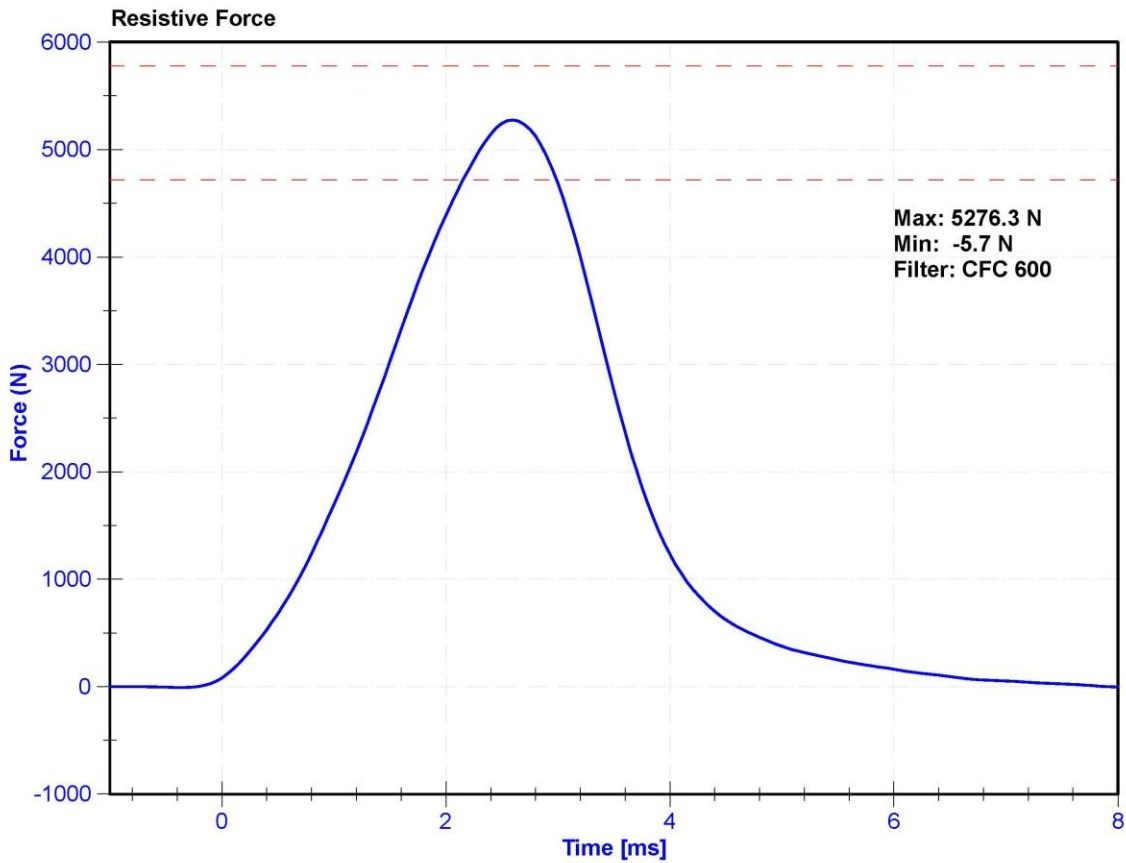

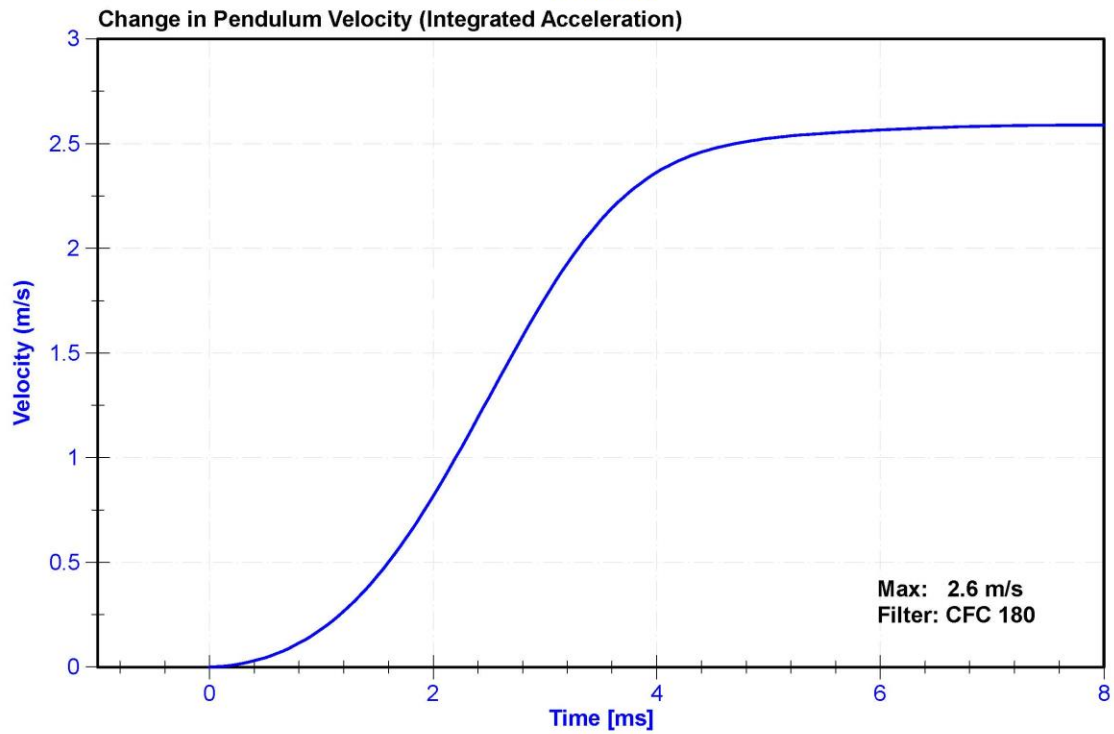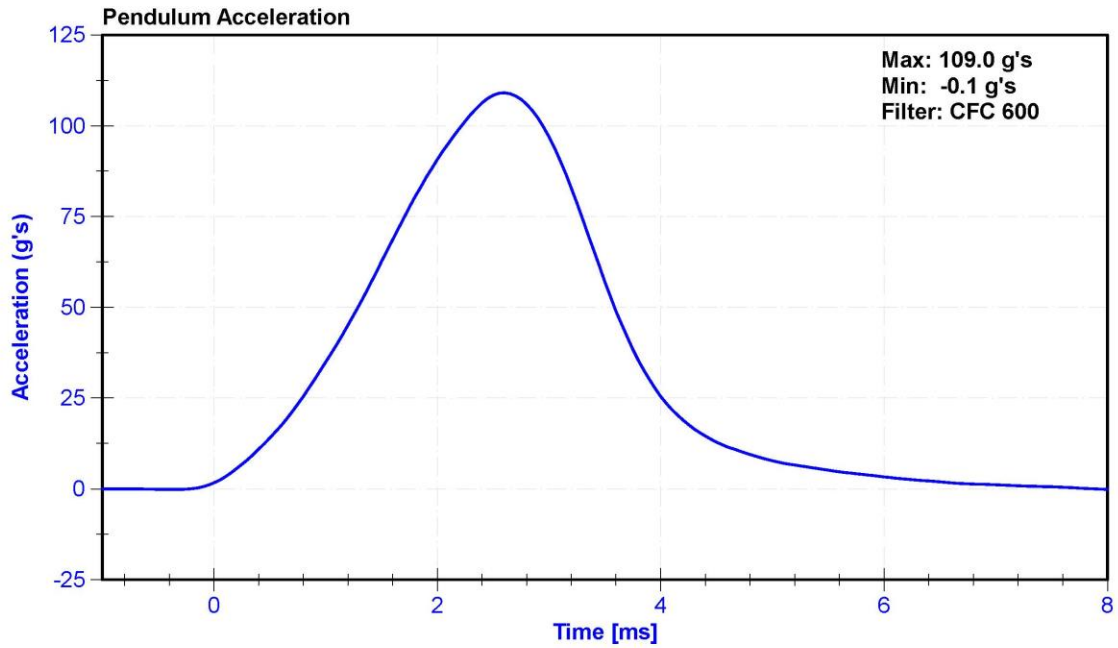

**CALIBRATION TEST RESULTS**

**PRE-TEST**

**HYBRID III 5<sup>TH</sup> PERCENTILE - PASSENGER ATD**

**SERIAL NO: 139**




External Measurements - Hybrid 3 - 5th Female

Technician: K. Brogan

Date: 02/27/2020

Dummy Serial Number: 139

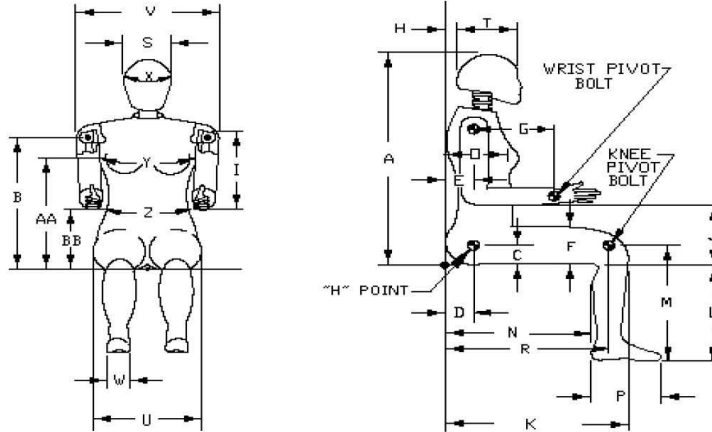

Symbol	Description	Specification (mm)		Result (mm)	Pass/Fail
A	Sitting Height	775	800	791	Pass
B	Shoulder Pivot Height	432	457	447	Pass
C	H-Point Height	81	86	84	Pass
D	H-Point from Backline	145	150	146	Pass
E	Shoulder Pivot from Backline	69	84	78	Pass
F	Thigh Clearance	119	135	125	Pass
G	Back of Elbow to Wrist Pivot	244	259	254	Pass
H	Head Back to Backline	43	48	46	Pass
I	Shoulder to Elbow Length	277	297	289	Pass
J	Elbow Rest Height	183	203	189	Pass
K	Buttock to Knee Length	521	546	541	Pass
L	Popliteal Height	356	376	363	Pass
M	Knee Pivot Height	394	419	402	Pass
N	Buttock Popliteal Length	414	439	425	Pass
O	Chest Depth without Jacket	175	191	185	Pass
P	Foot Length (right)	219	234	225	Pass
R	Buttock To Knee Pivot Length	457	483	473	Pass
S	Head Breadth	137	147	143	Pass
T	Head Depth	178	188	182	Pass
U	Hip Breadth	300	315	310	Pass
V	Shoulder Breadth	351	366	362	Pass
W	Foot Breadth	79	94	87	Pass
X	Head Circumference	528	549	535	Pass
Y	Chest Circumference with Jacket	851	881	861	Pass
Z	Waist Circumference	460	790	773	Pass
AA	Reference Location (Chest Circumference)	333	358	345	Pass
BB	Reference Location (Waist Circumference)	160	170	165	Pass




ATD Manufacturer	Denton	Test Technician	D.Reinhard
ATD Serial Number	139	Laboratory Supervisor	K. Brogan




**Results**

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	18.9	25.6	°C	21.7	Pass
Humidity	10	70	%	24	Pass
Resultant Acceleration	250	300	g's	254.9	Pass
Oscillation	0	10	%	1.8	Pass
Lateral Acceleration	-15	15	g's	7.0	Pass

**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
X Accelerometer	ENDEVCO 7264CT	AC-P51945	10/21/2019	4/20/2020
Y Accelerometer	ENDEVCO 7264CT	AC-P51974	10/21/2019	4/20/2020
Z Accelerometer	ENDEVCO 7264CT	AC-P51946	10/21/2019	4/20/2020

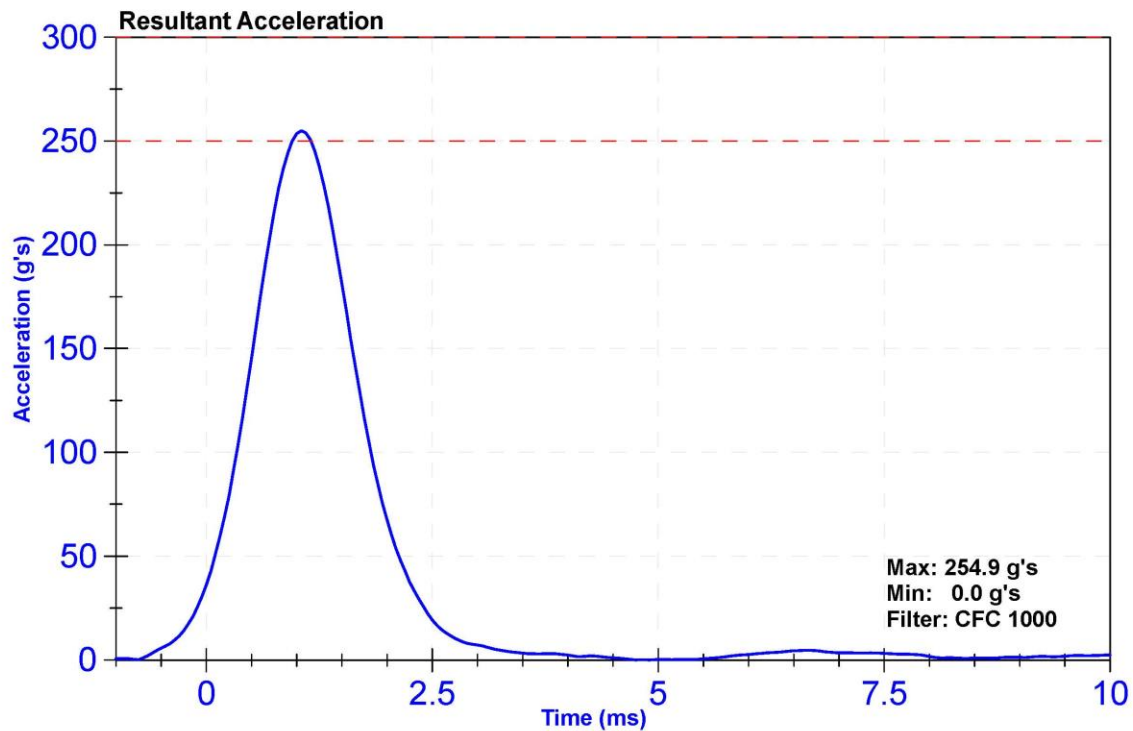

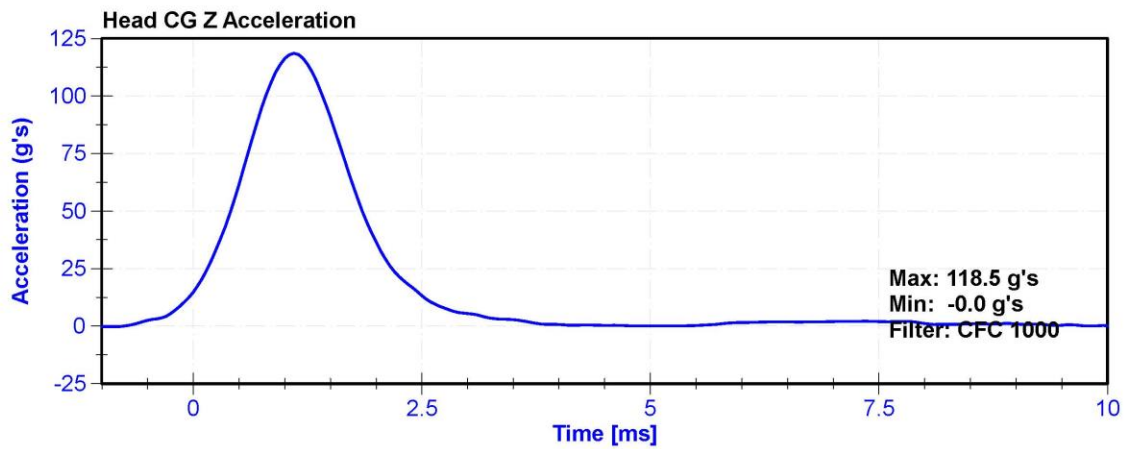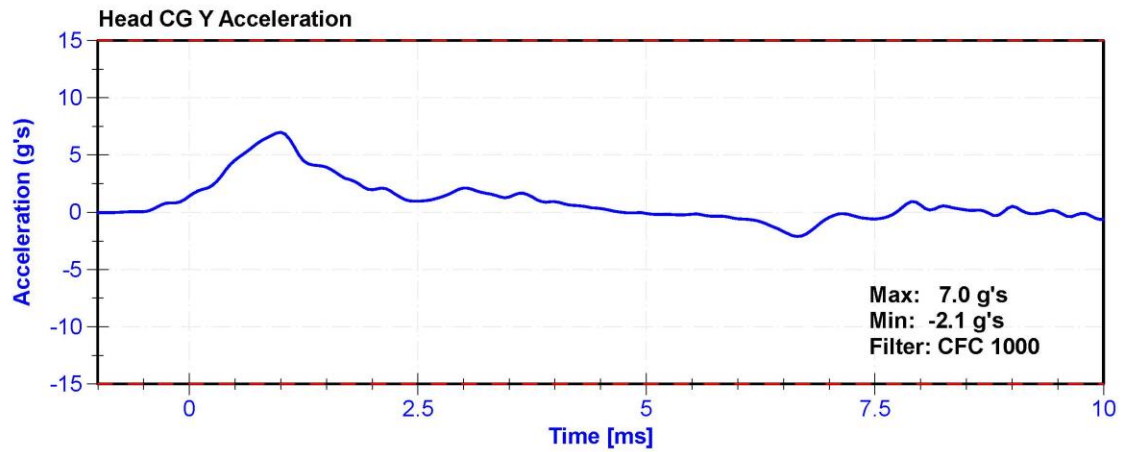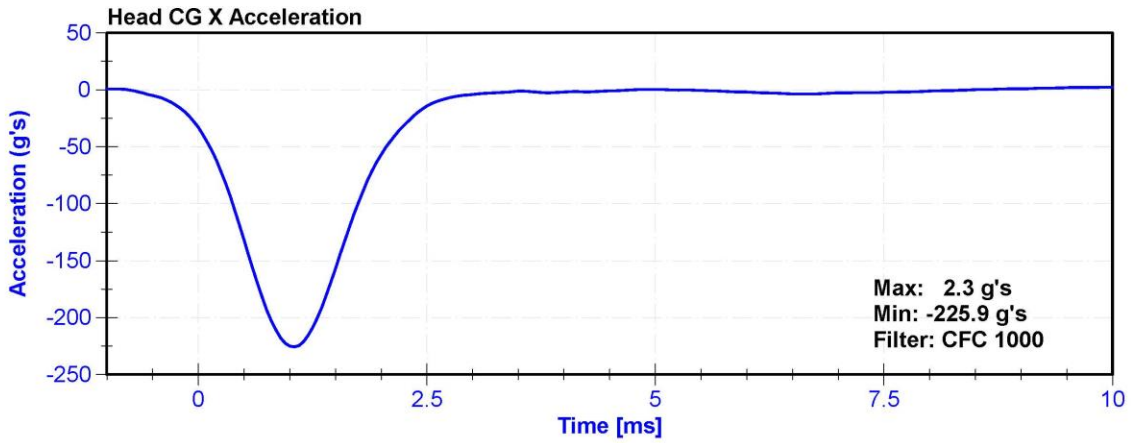


ATD Manufacturer	Denton	Test Technician	D. Reinhard
ATD Serial Number	139	Laboratory Supervisor	K. Brogan



**Results**




Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	22.0	Pass
Humidity	10	70	%	26.9	Pass
Velocity	6.89	7.13	m/s	6.903	Pass
Pendulum Impulse at 10ms	2.1	2.5	m/s	2.22	Pass
Pendulum Impulse at 20ms	4.0	5.0	m/s	4.53	Pass
Pendulum Impulse at 30ms	5.8	7.0	m/s	6.46	Pass
Max D Plane Rotation	77	91	deg	81.7	Pass
Max Moment During Rotation Interval	69	83	Nm	75.5	Pass
Moment Decay to 10.0 Nm	80	100	ms	86.9	Pass

**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	ENDEVCO 7231CT	AC-AH5M9 Pend	1/30/2020	1/29/2021
Pendulum Potentiometer	ETI SP22G	DS-LABPOT1	9/13/2019	9/12/2020
Condyle Potentiometer	ETI SP22G	DS-LABPOT2	9/13/2019	9/12/2020
Upper Neck Load Cell	Denton 1716A	LC-1916Fx	10/3/2019	10/2/2020

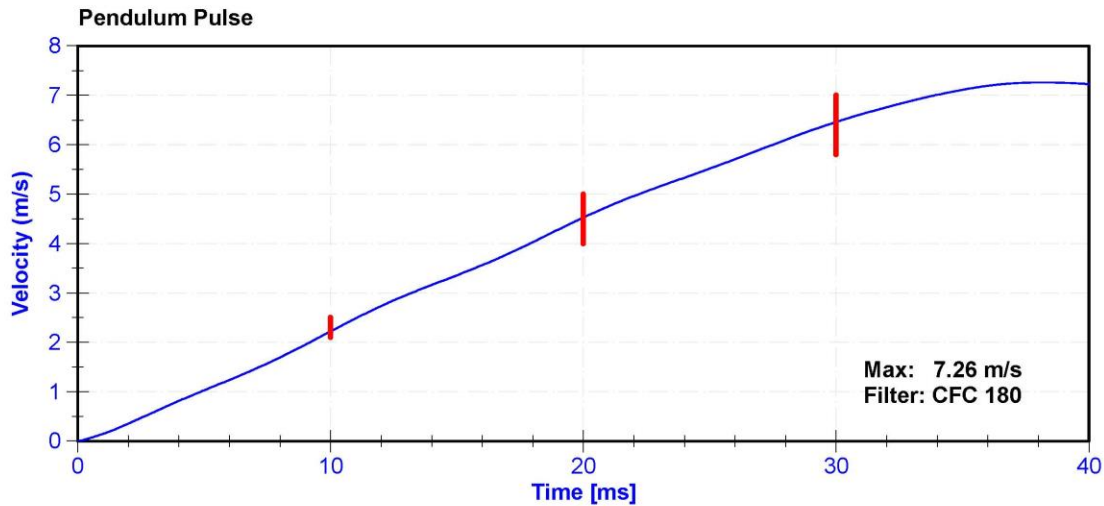

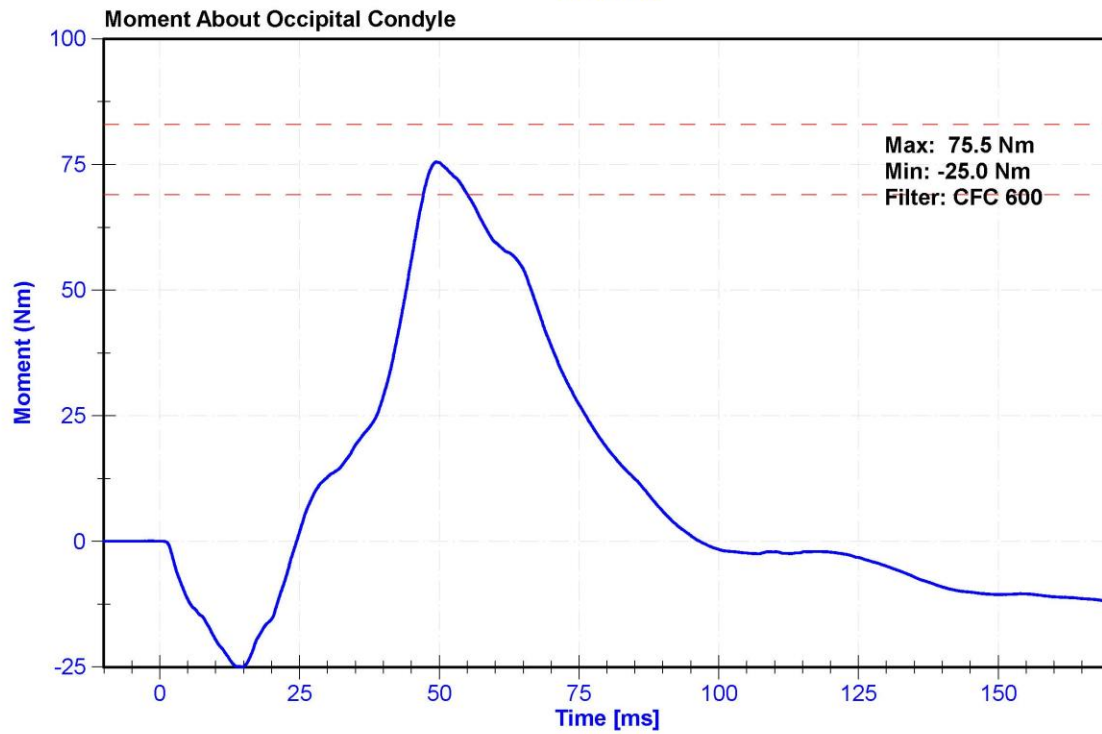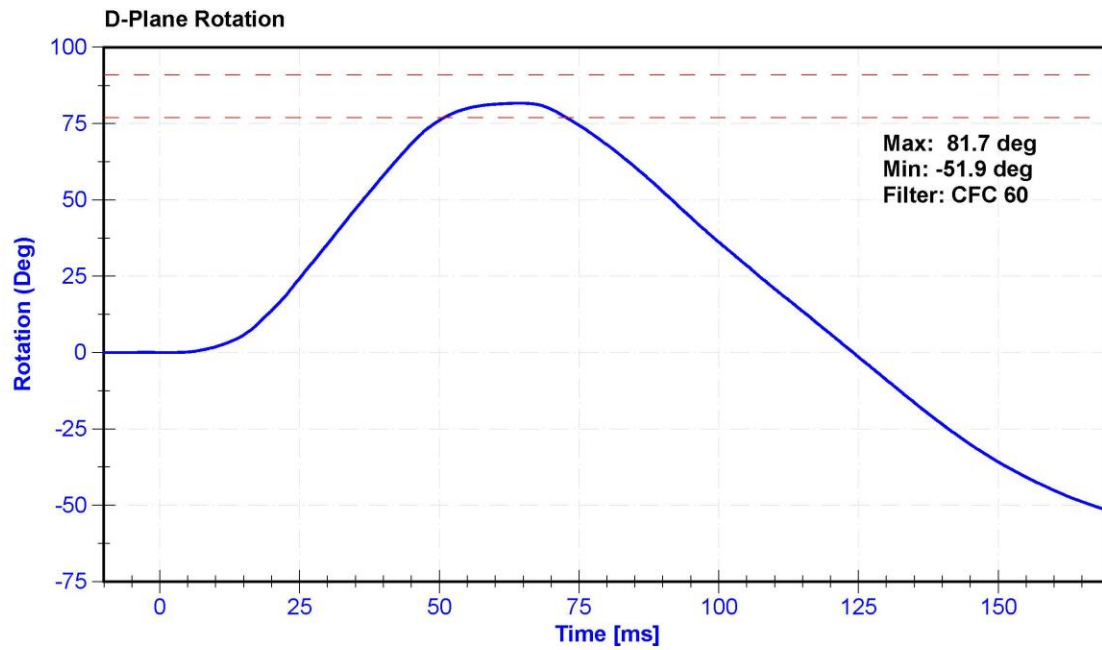

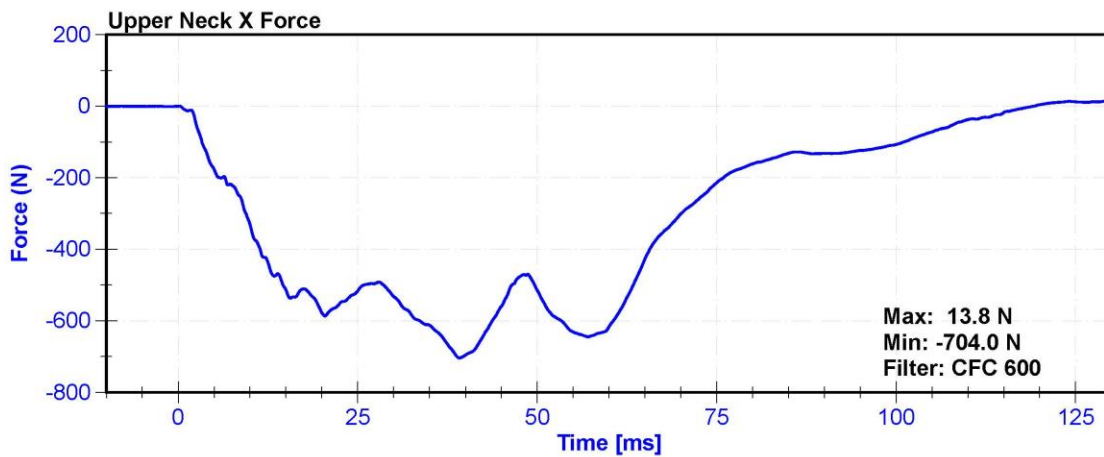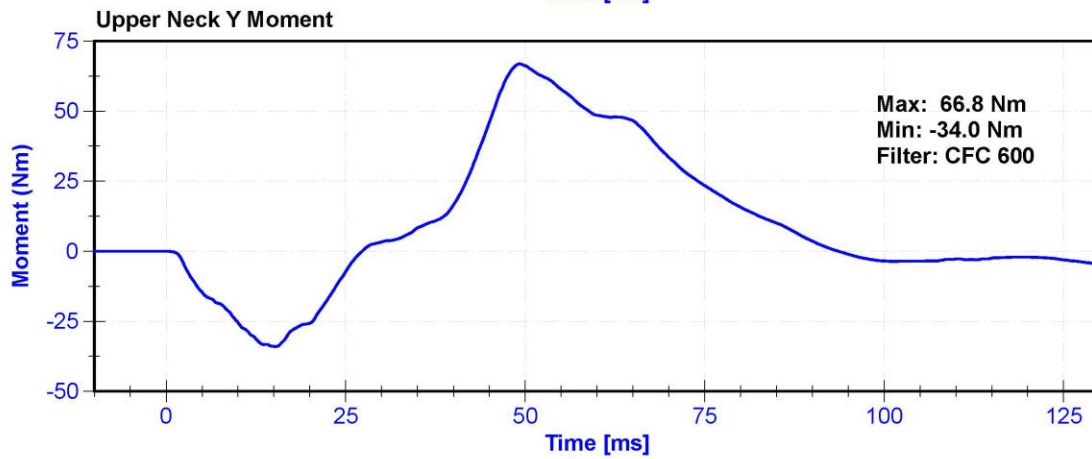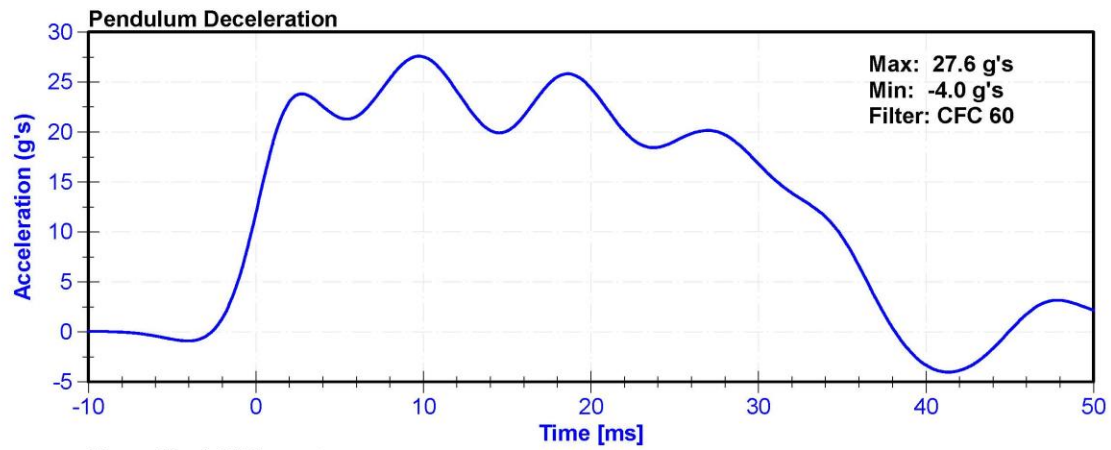


ATD Manufacturer	Denton	Test Technician	D.Reinhard
ATD Serial Number	139	Laboratory Supervisor	K. Brogan



**Results**




Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21.9	Pass
Humidity	10	70	%	27.4	Pass
Velocity	5.95	6.19	m/s	6.046	Pass
Pendulum Impulse at 10ms	1.5	1.9	m/s	1.70	Pass
Pendulum Impulse at 20ms	3.1	3.9	m/s	3.52	Pass
Pendulum Impulse at 30ms	4.6	5.6	m/s	5.28	Pass
D Plane Rotation	99	114	deg	99.5	Pass
Moment During Rotation Interval	-65	-53	Nm	-62.9	Pass
Moment Decay to -10Nm	94	114	ms	98.0	Pass

**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	ENDEVCO 7231CT	AC-AH5M9 Pend	1/30/2020	1/29/2021
Pendulum Potentiometer	ETI SP22G	DS-LABPOT1	9/13/2019	9/12/2020
Condyle Potentiometer	ETI SP22G	DS-LABPOT2	9/13/2019	9/12/2020
Upper Neck Load Cell	Denton 1716A	LC-1916Fx	10/3/2019	10/2/2020

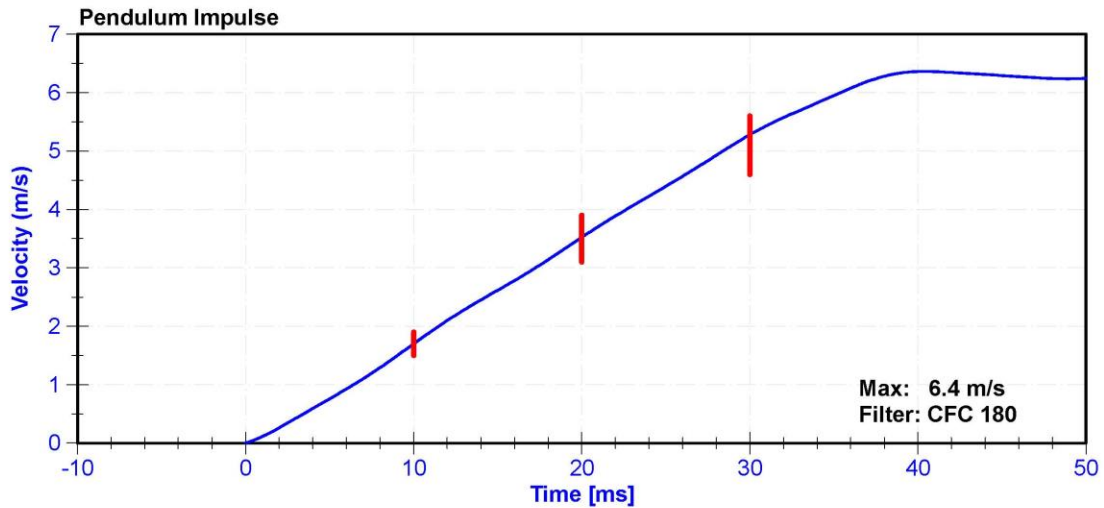

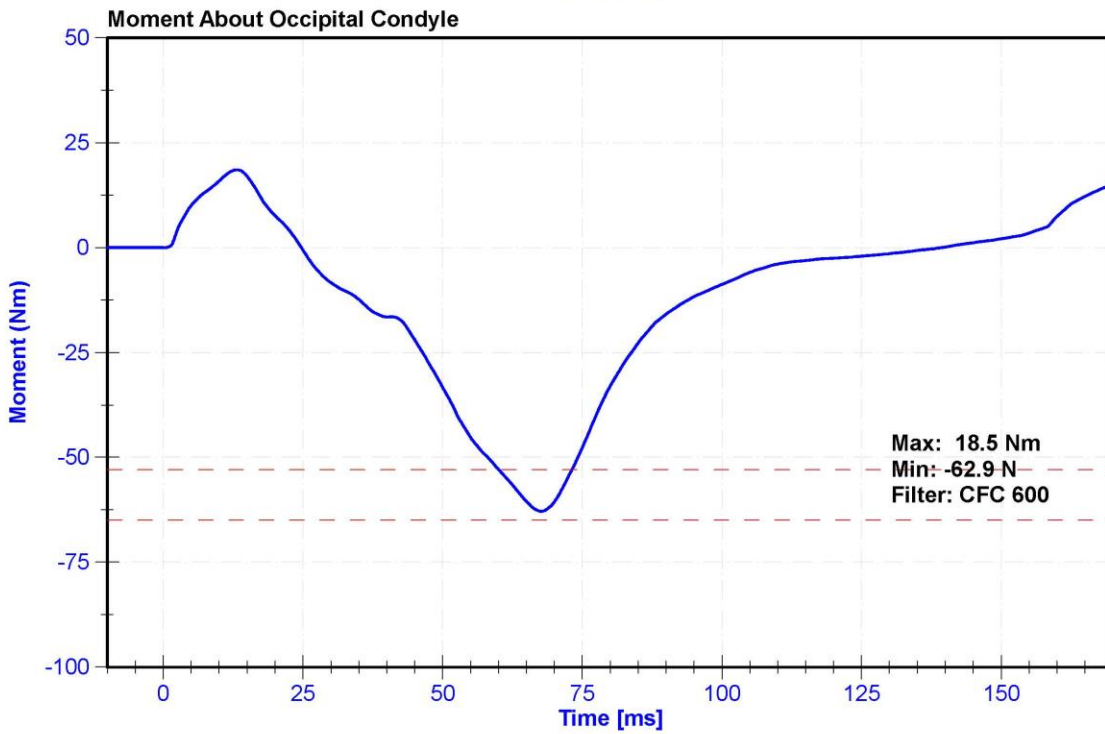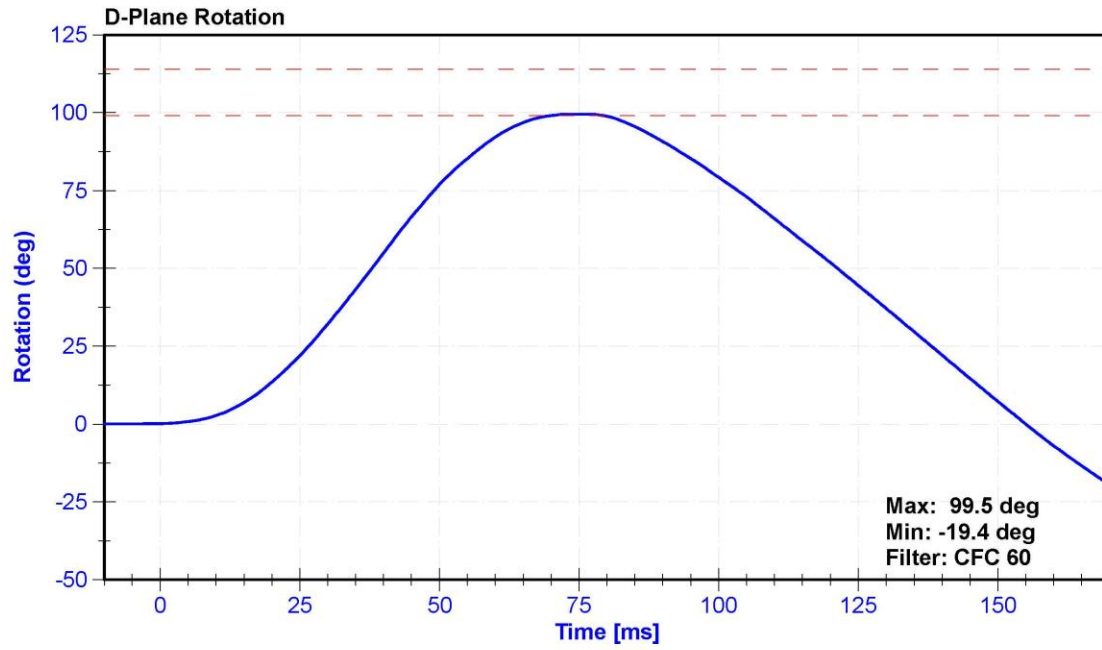

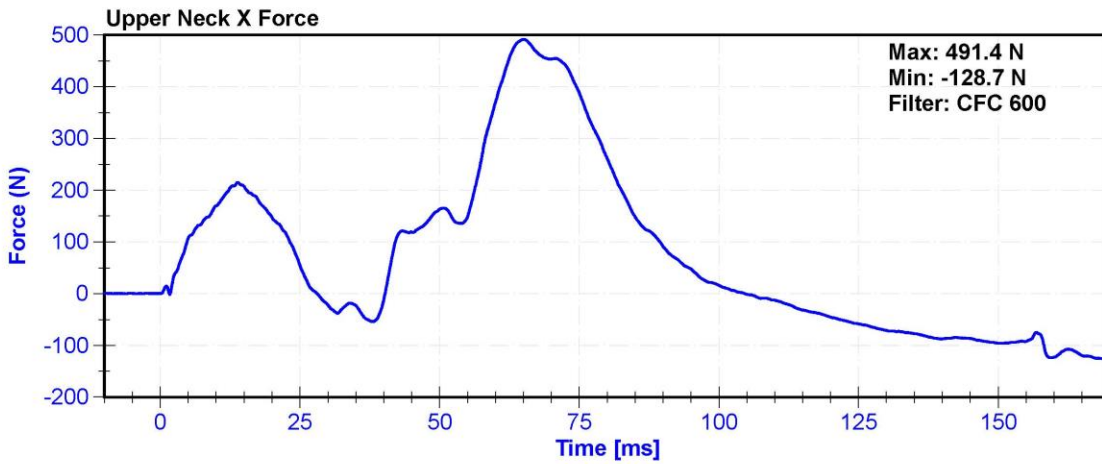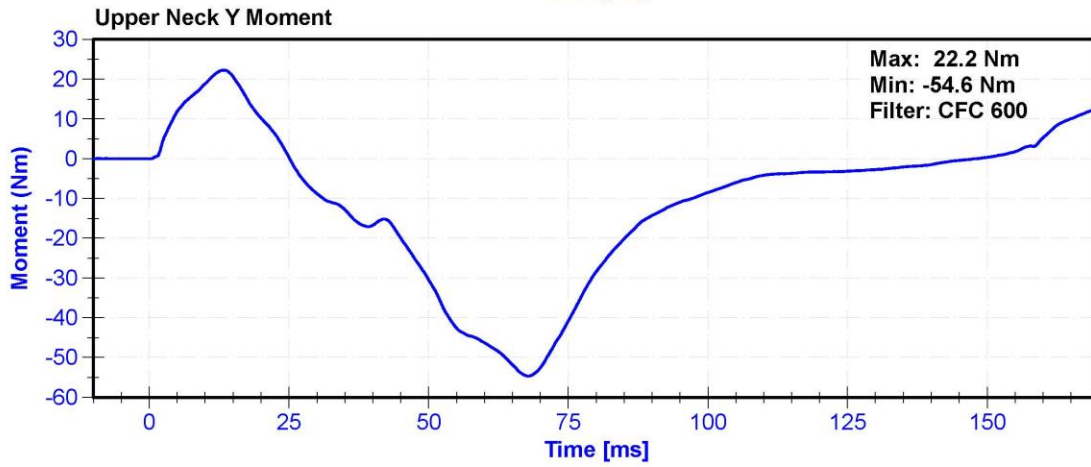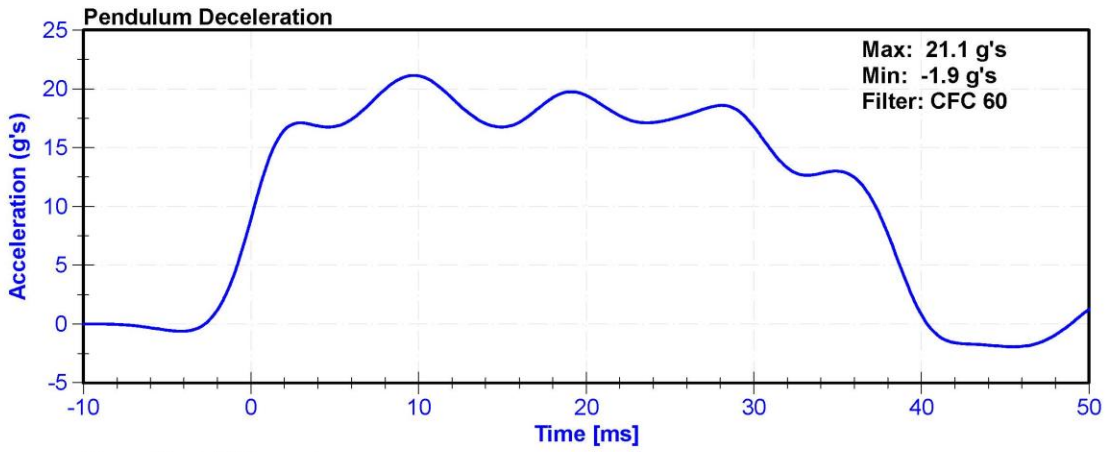




ATD Manufacturer	Denton	Test Technician	D.Reinhard
ATD Serial Number	139	Laboratory Supervisor	K. Brogan



**Results**



Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	22	Pass
Humidity	10	70	%	15.2	Pass
Velocity	6.59	6.83	m/s	6.788	Pass
Chest Deflection	-58	-50	mm	-56.7	Pass
Maximum Resistive Force (50 to 58mm)	3900	4400	N	4267.4	Pass
Maximum Resistive Force (18 to 50mm)	0	4600	N	3969.3	Pass
Hysteresis	69	85	%	69.8	Pass

**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	MSI 64C-2000	A286228	1/29/2020	7/29/2020
Chest Potentiometer	SERVO 14CB1-2897	DS-288GFE	10/23/2019	4/22/2020

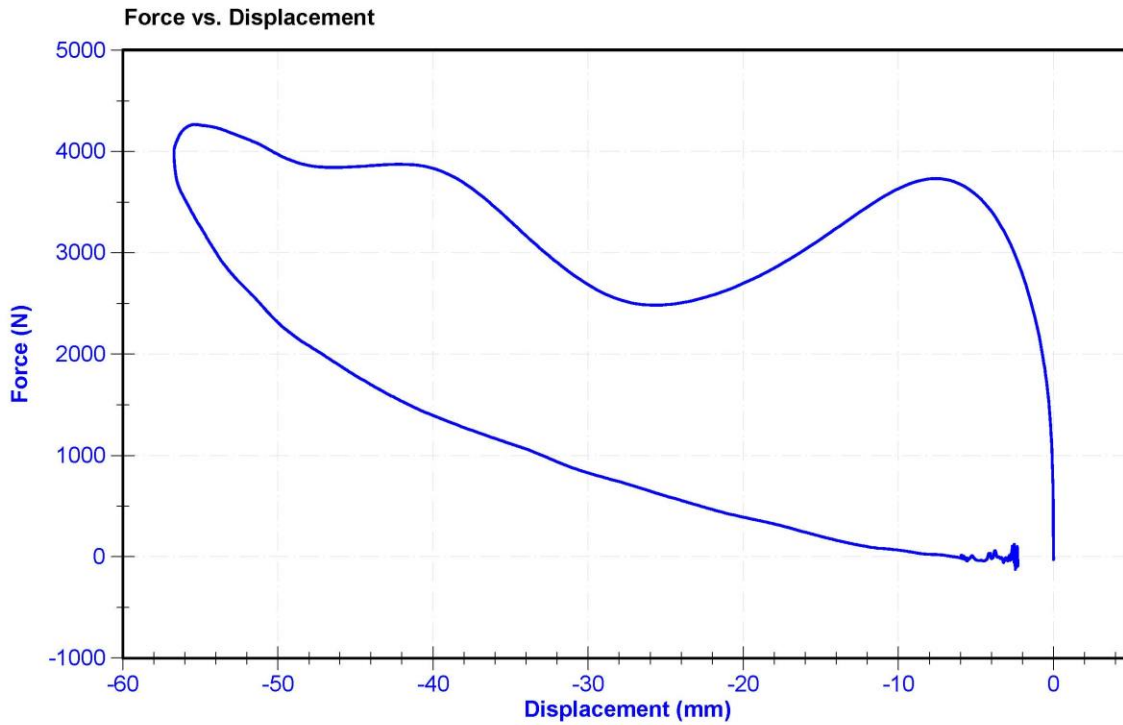

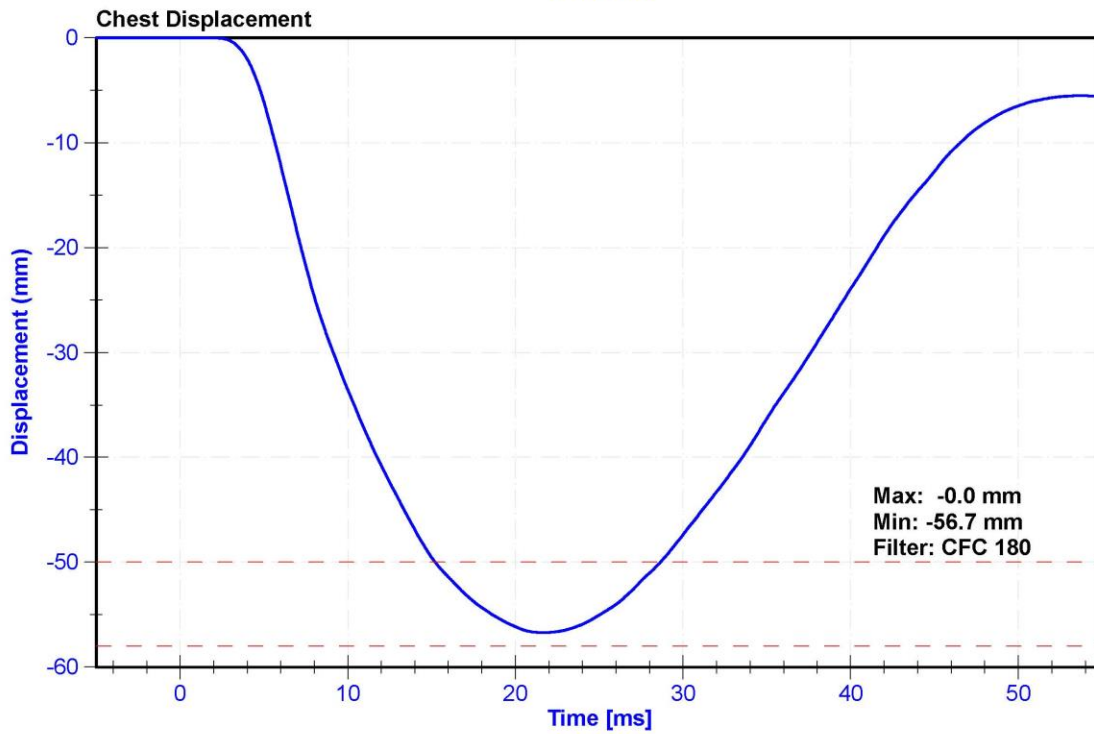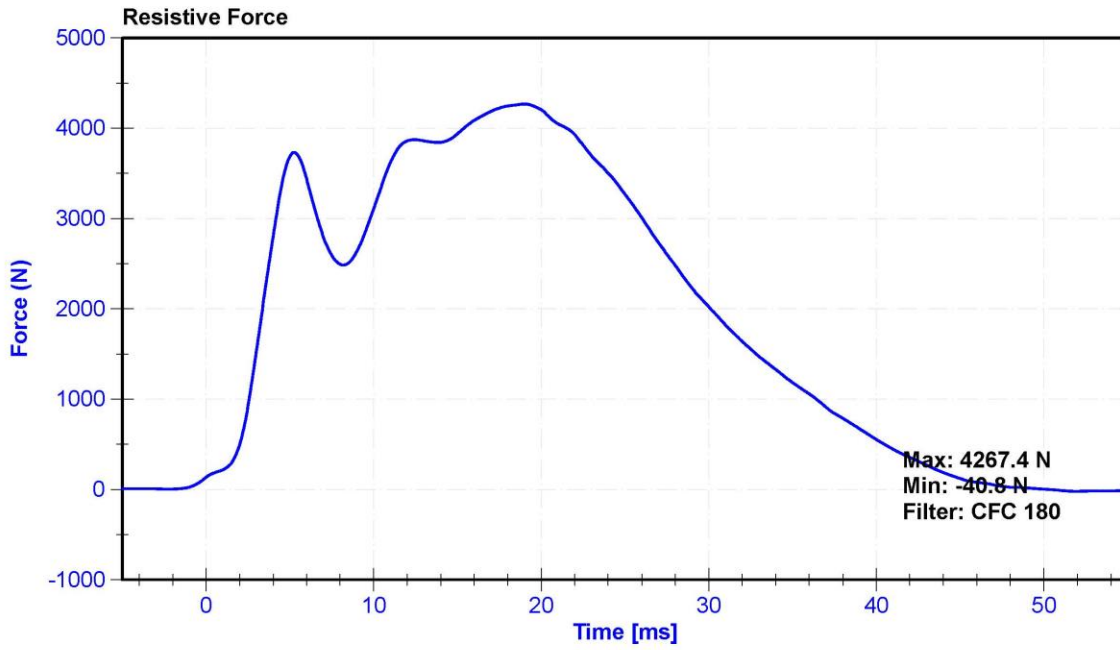

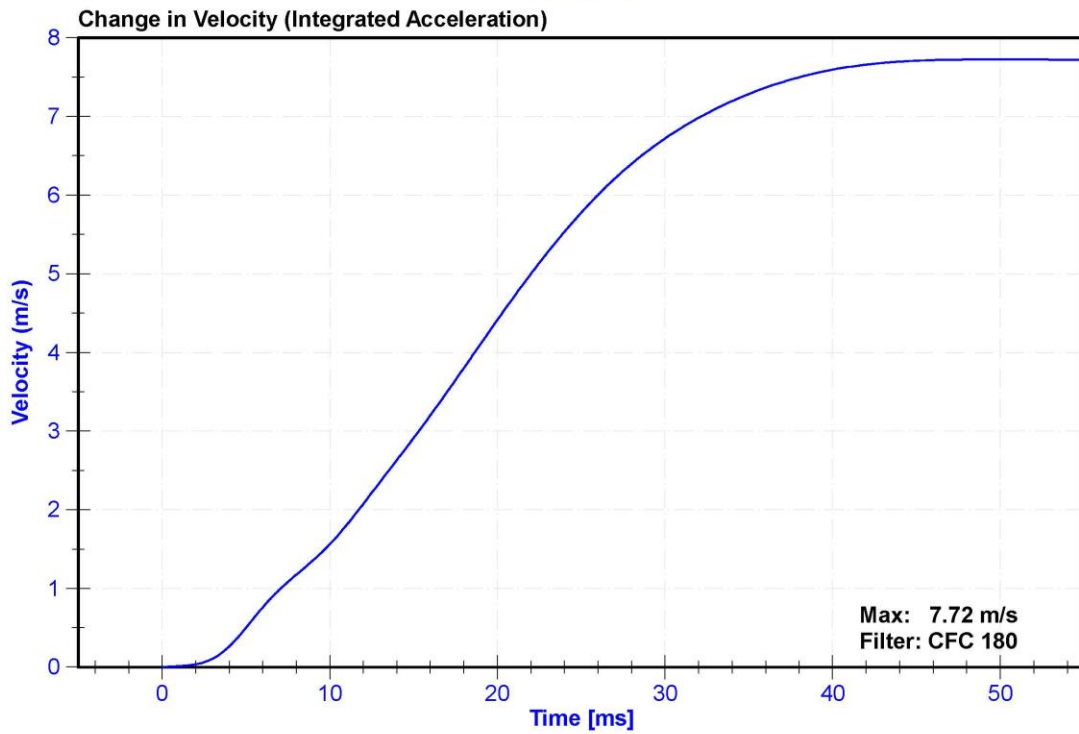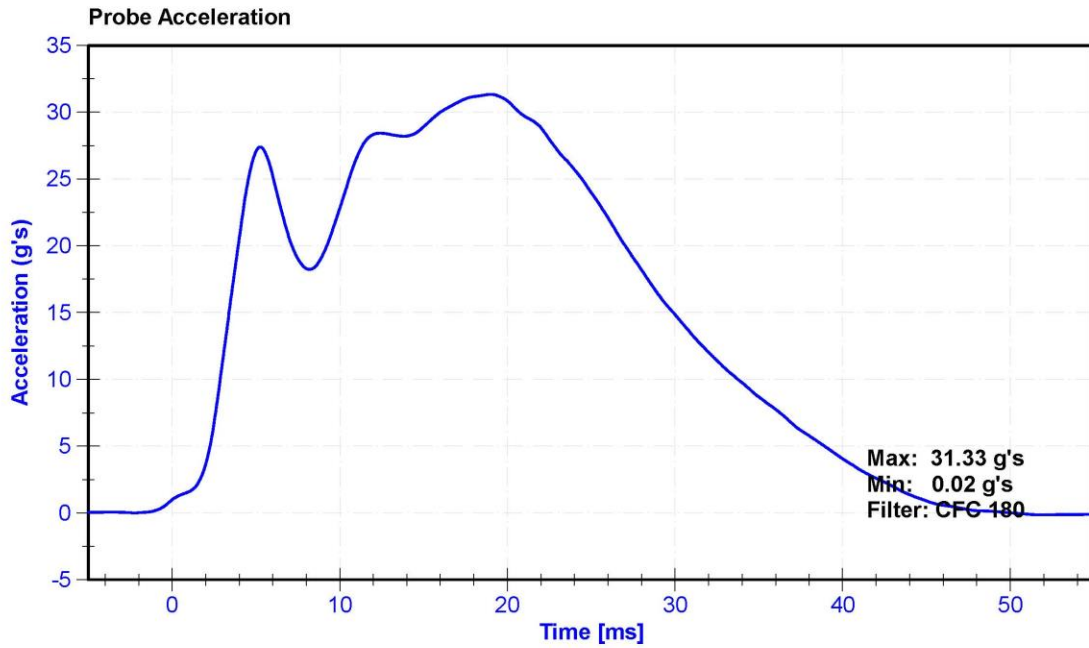


ATD Manufacturer	Denton	Test Technician	D.Reinhard
ATD Serial Number	139	Laboratory Supervisor	B. Krogan

**Results**

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	18.6	25.6	°C	21.4	Pass
Humidity	10	70	%	16.4	Pass
Initial Angle	0	20	deg	15.9	Pass
Force at 45 Degrees	320	390	N	384.2	Pass
Return Angle Relative to Initial	0	8	deg	0.2	Pass

**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Potentiometer	Rieker N4C-1	DS-13051548	12/9/2019	12/8/2020
Load Cell	Interface SML-200	LC-493319	1/10/2020	1/9/2021

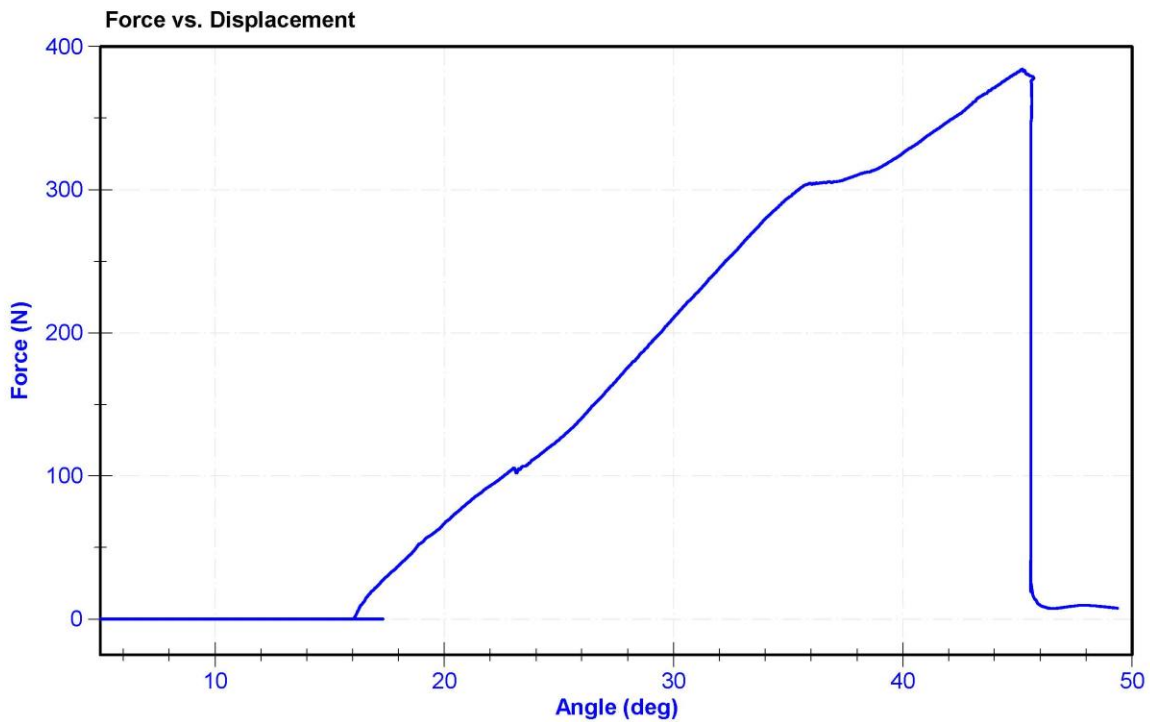


ATD Manufacturer	Denton	Test Technician	D.Reinhard
ATD Serial Number	139	Laboratory Supervisor	K.Brogan



**Results**

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	18.9	25.6	°C	21.4	Pass
Humidity	10	70	%	21.0	Pass
Velocity	2.07	2.13	m/s	2.098	Pass
Resistive Force	3450	4060	N	3796.6	Pass

**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	MSI 64C-2000	A260568	1/29/2020	7/29/2020

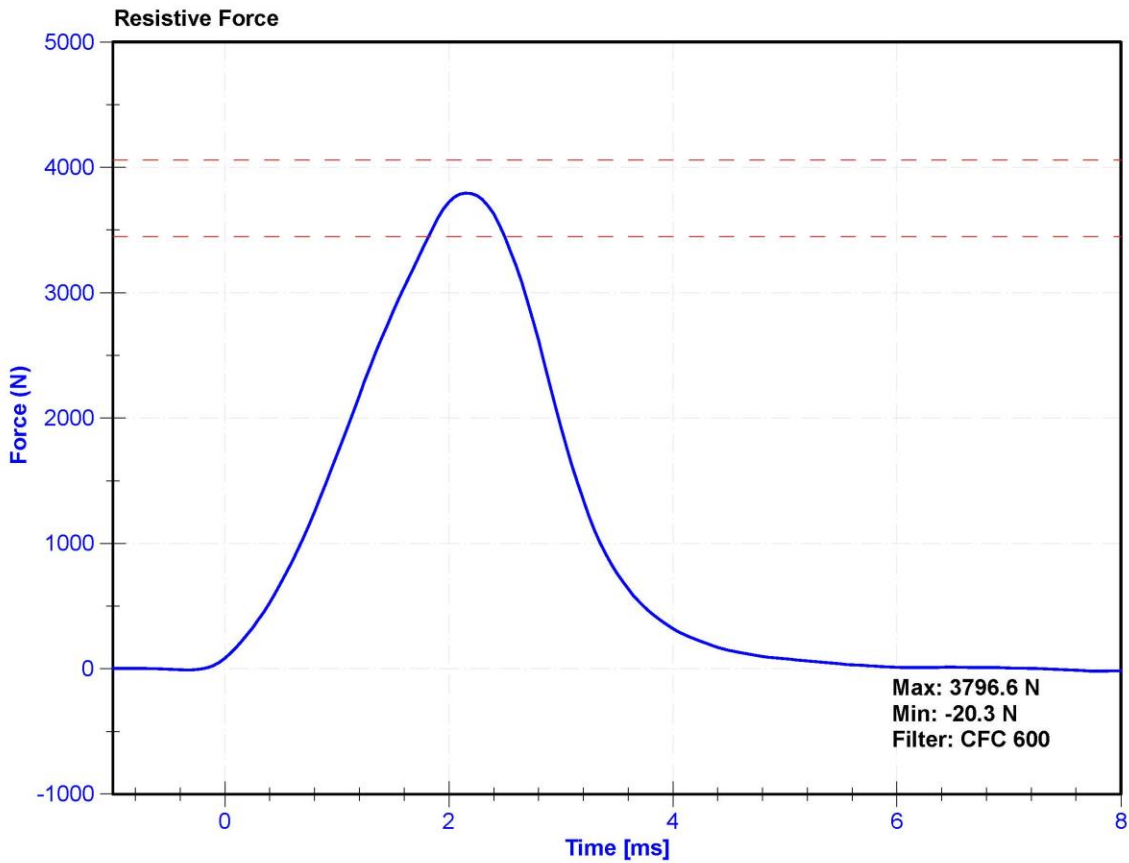

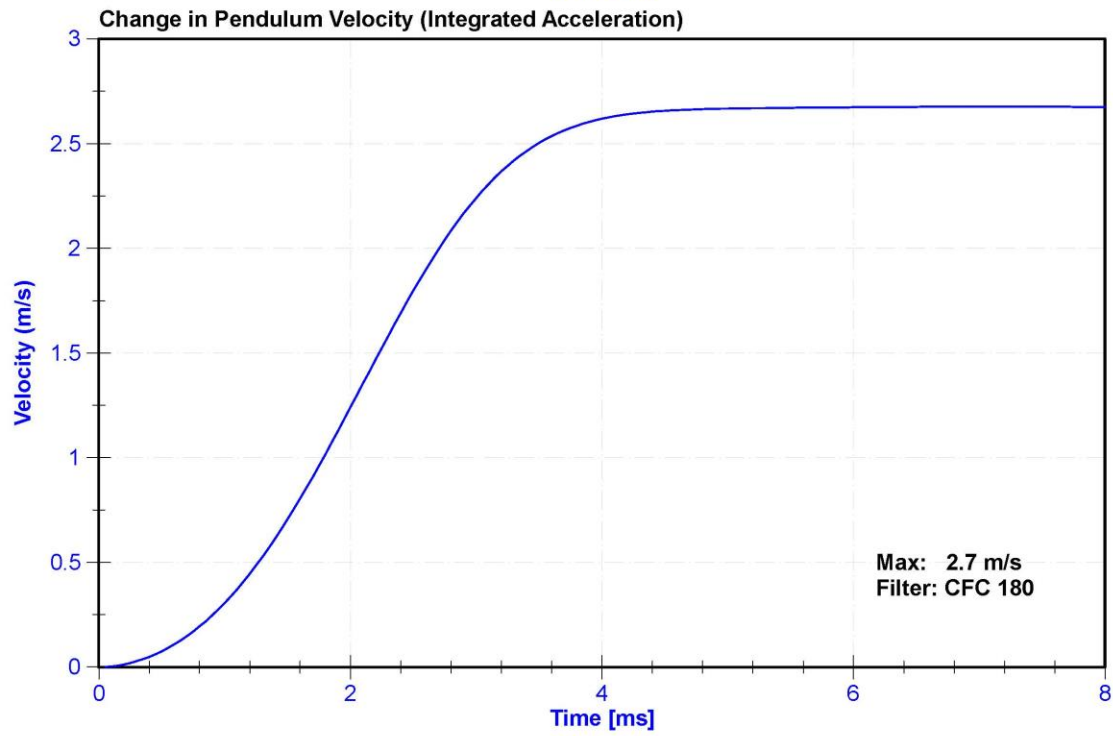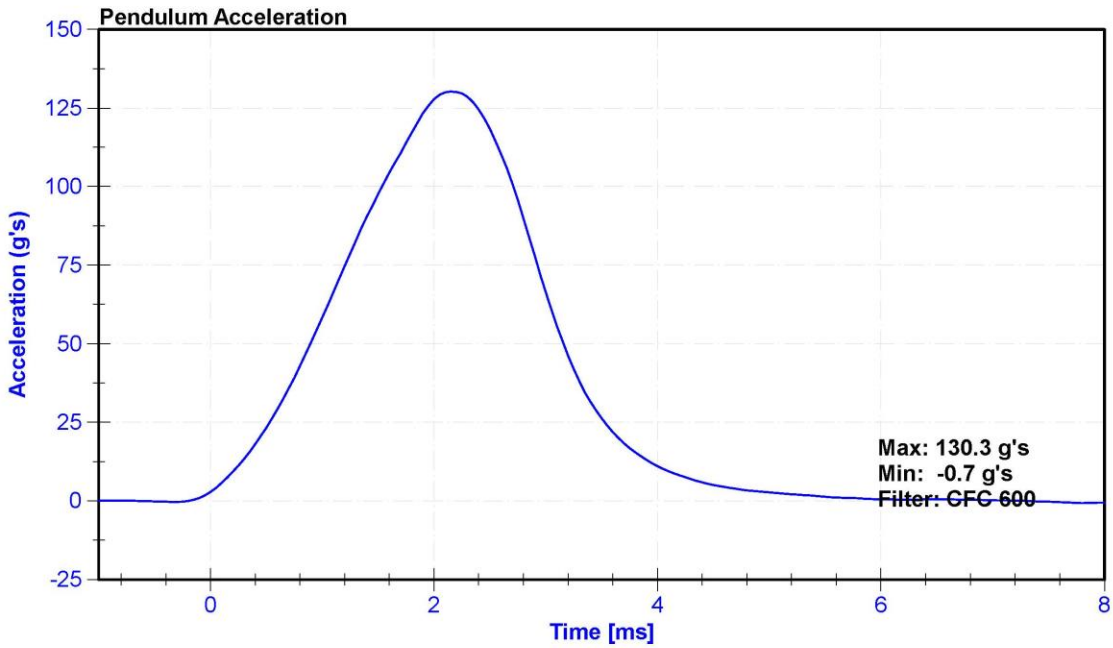


ATD Manufacturer	Denton	Test Technician	D.Reinhard
ATD Serial Number	139	Laboratory Supervisor	K.Brogan



**Results**

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	18.9	25.6	°C	21.4	Pass
Humidity	10	70	%	21.0	Pass
Velocity	2.07	2.13	m/s	2.098	Pass
Resistive Force	3450	4060	N	3796.6	Pass

**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	MSI 64C-2000	A260568	1/29/2020	7/29/2020

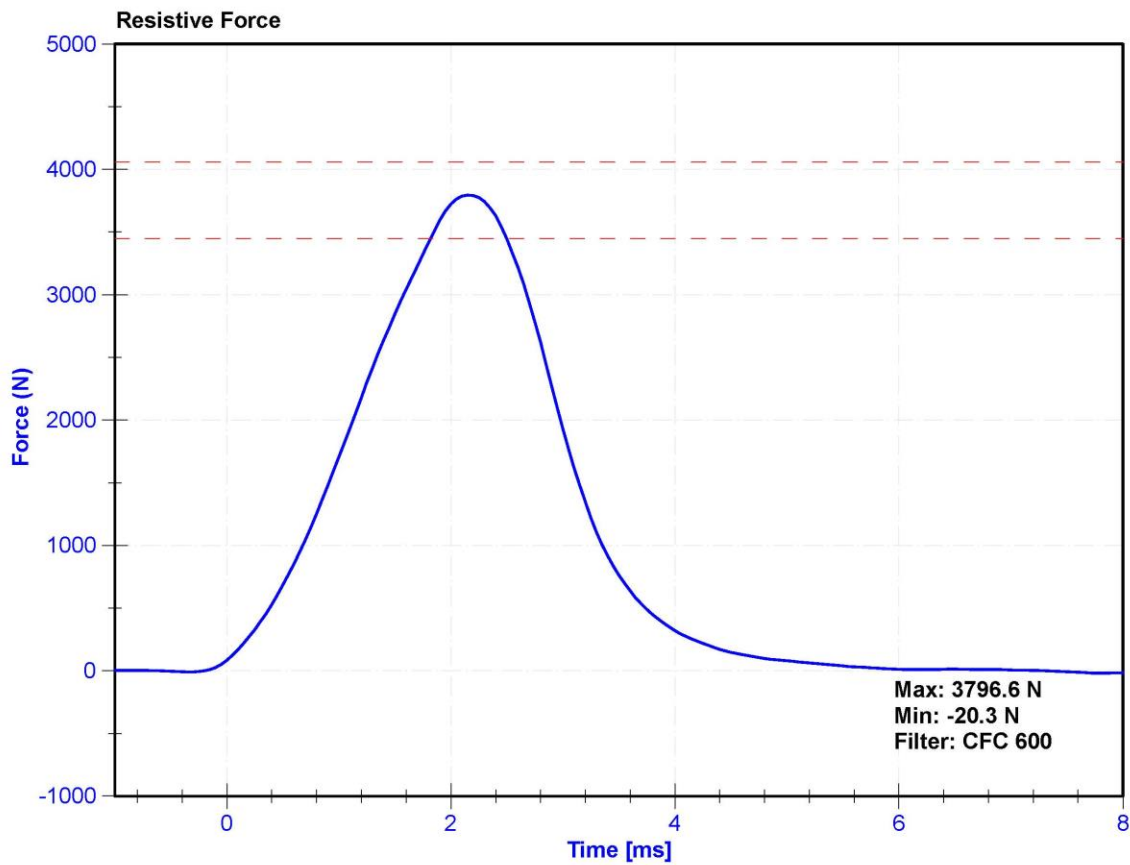

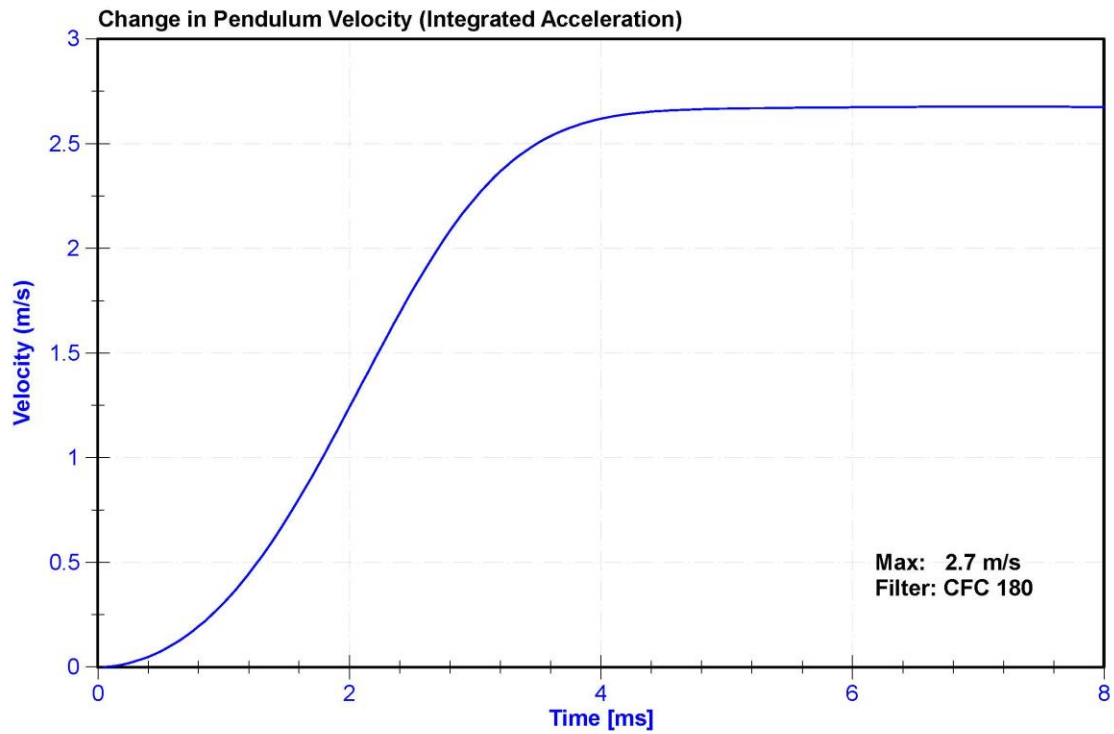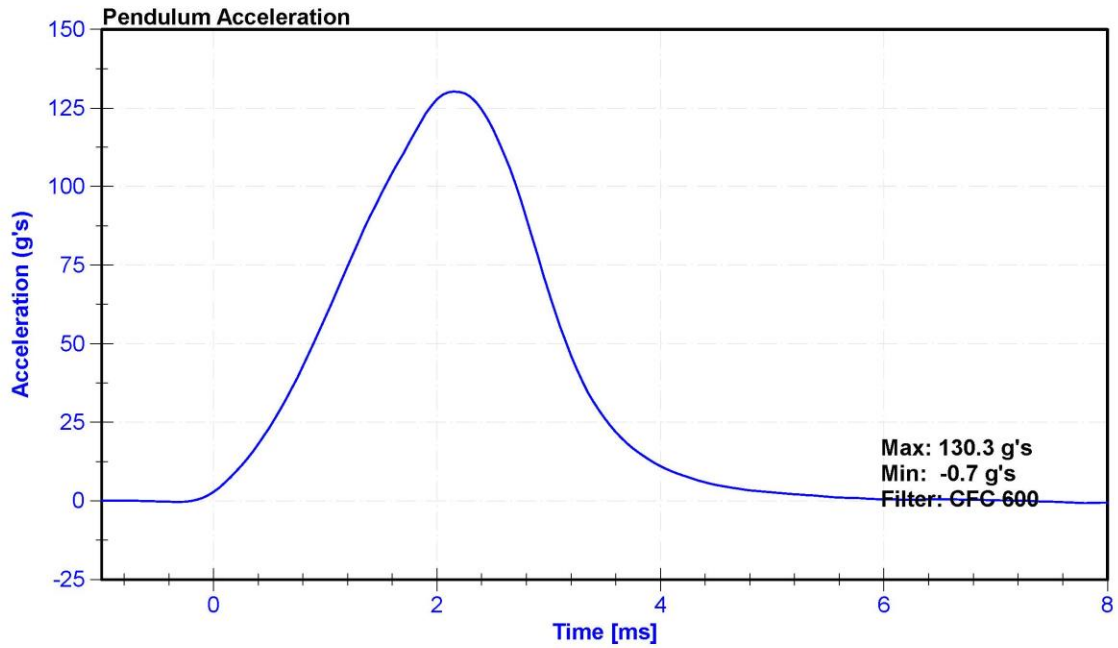



**CALIBRATION TEST RESULTS**

**POST-TEST**

**HYBRID III 50<sup>TH</sup> PERCENTILE MALE - DRIVER ATD**

**SERIAL NO: 142**




External Measurements - Hybrid 3 - 50th Male

Technician: K. Dutton

Date: 03/04/2020

Dummy Serial Number: 142

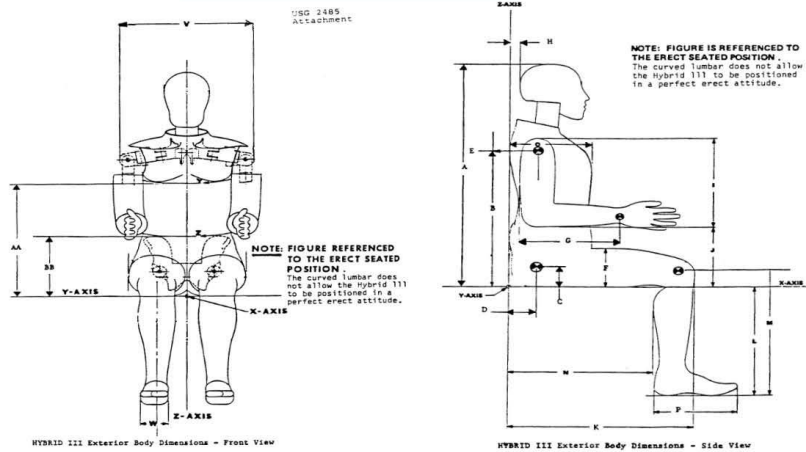

Symbol	Description	Specification (in)		Result (in)	Pass/Fail
A	Sitting Height	34.6	35.0	34.8	Pass
B	Shoulder Pivot Height	19.9	20.5	20.2	Pass
C	H-Point Height	3.3	3.5	3.4	Pass
D	H-Point from Backline	5.3	5.5	5.4	Pass
E	Shoulder Pivot from Backline	3.3	3.7	3.6	Pass
F	Thigh Clearance	5.5	6.1	5.8	Pass
G	Back of Elbow to Wrist Pivot	11.4	12.0	11.6	Pass
H	Head Back to Backline	1.6	1.8	1.7	Pass
I	Shoulder to Elbow Length	13.0	13.6	13.4	Pass
J	Elbow Rest Height	7.5	8.3	8.0	Pass
K	Buttock to Knee Length	22.8	23.8	23.4	Pass
L	Popliteal Height	16.9	17.9	17.4	Pass
M	Knee Pivot Height	19.1	19.7	19.5	Pass
N	Buttock Popliteal Length	17.8	18.8	18.4	Pass
O	Chest Depth without Jacket	8.4	9.0	8.7	Pass
P	Foot Length (right)	9.9	10.5	10.3	Pass
V	Shoulder Breadth	16.3	17.2	16.9	Pass
W	Foot Breadth	3.6	4.2	3.8	Pass
Y	Chest Circumference with Jacket	38.2	39.4	38.8	Pass
Z	Waist Circumference	32.9	34.1	33.7	Pass
AA	Reference Location (Chest Circumference)	16.9	17.1	17.0	Pass
BB	Reference Location (Waist Circumference)	8.9	9.1	9.0	Pass


ATD Manufacturer	Humanetics	Test Technician	M. Dudek
ATD Serial Number	142	Laboratory Supervisor	K. Brogan




**Results**

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	18.9	25.6	°C	21.0	Pass
Humidity	10	70	%	22.7	Pass
Resultant Acceleration	225	275	g's	256.5	Pass
Oscillation	0	10	%	4.4	Pass
Lateral Acceleration	-15	15	g's	-2.9	Pass

**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
X Accelerometer	ENDEVCO 7264	P51681	2/10/2020	8/10/2020
Y Accelerometer	ENDEVCO 7264	P64151	2/10/2020	8/10/2020
Z Accelerometer	ENDEVCO 7264	P52114	2/10/2020	8/10/2020

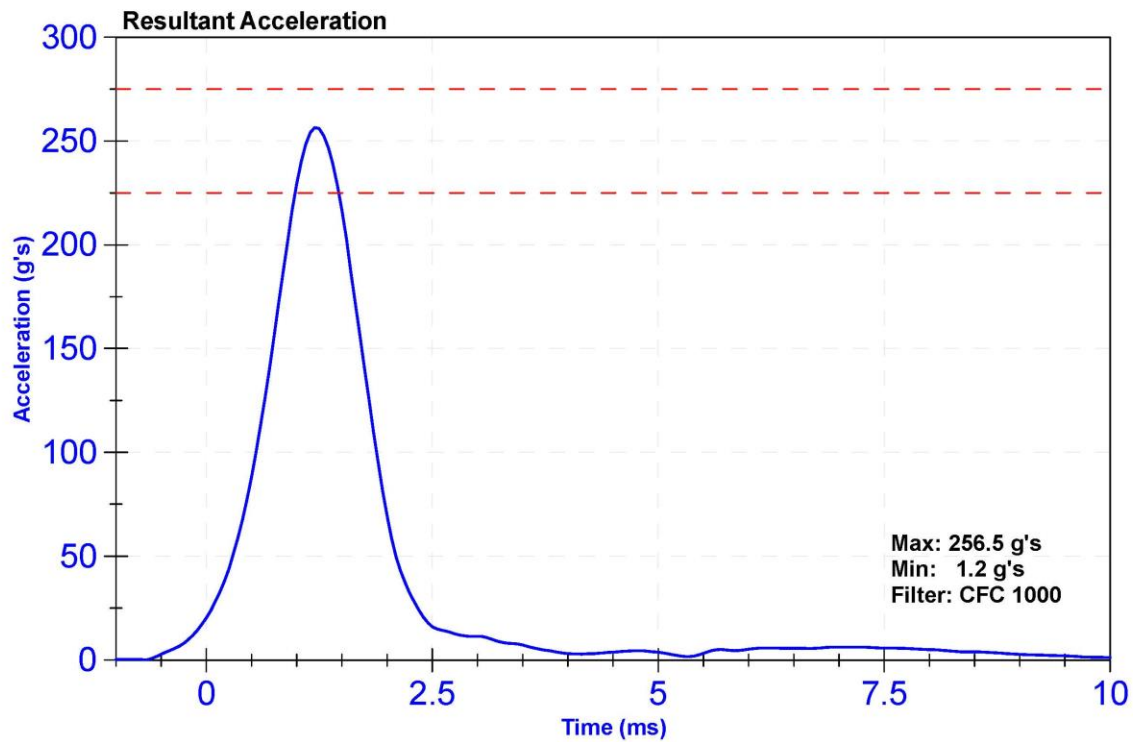

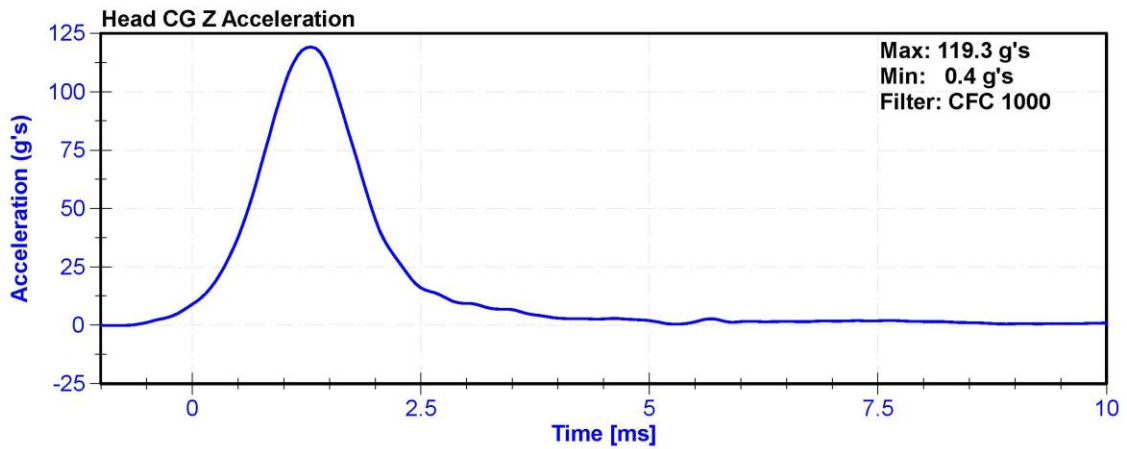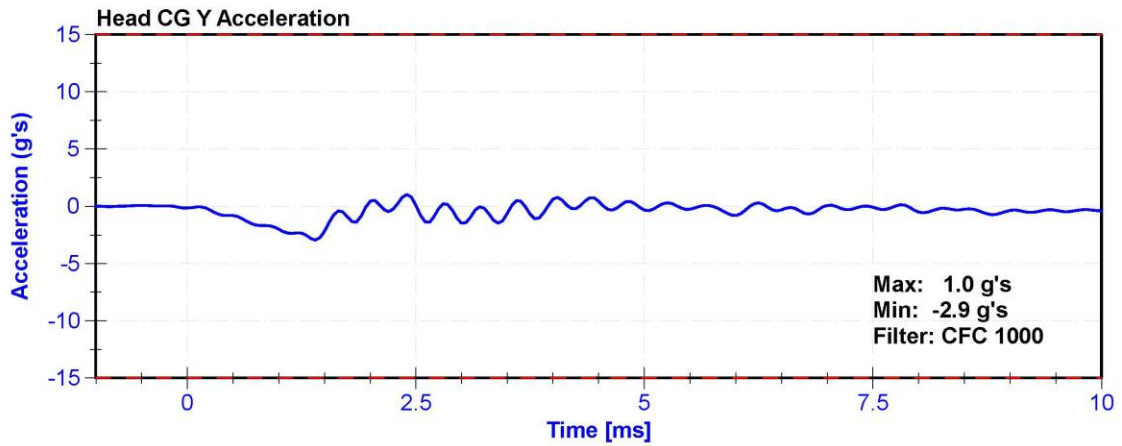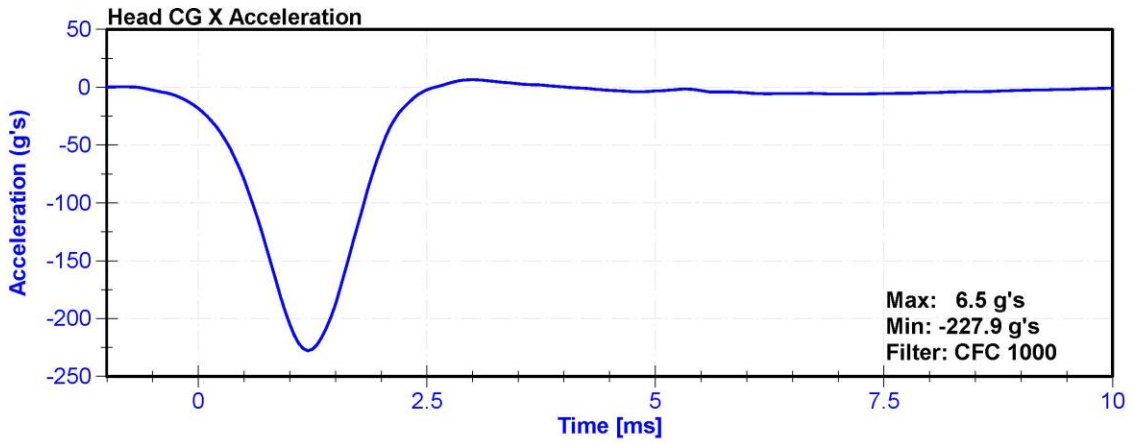



ATD Manufacturer	Humanetics	Test Technician	M. Dudek
ATD Serial Number	142	Laboratory Supervisor	K. Brogan




**Results**

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21.3	Pass
Humidity	10	70	%	24.9	Pass
Velocity	6.89	7.13	m/s	6.903	Pass
Pendulum Deceleration at 10ms	22.5	27.5	g's	24.35	Pass
Pendulum Deceleration at 20ms	17.6	22.6	g's	21.90	Pass
Pendulum Deceleration at 30ms	12.5	18.5	g's	15.99	Pass
Max. Pendulum Deceleration After 30ms	0	29	g's	24.4	Pass
Pendulum Deceleration Time to 5 g's	34	42	ms	41.8	Pass
Maximum D Plane Rotation	64	78	deg	73.4	Pass
Time to Maximum Rotation	57	64	ms	62.1	Pass
Rotation Decay to Zero	113	127	ms	120.7	Pass
Moment About Occipital Condyle	88.1	108.4	Nm	93.29	Pass
Time to Maximum Moment	47	58	ms	55.4	Pass
Moment Decay to Zero	97	107	ms	105.0	Pass

**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	ENDEVCO 7231CT	AC-AH5M9 Pend	1/30/2020	1/29/2021
Pendulum Potentiometer	ETI SP22G	DS-LABPOT1	9/13/2019	9/12/2020
Condyle Potentiometer	ETI SP22G	DS-LABPOT2	9/13/2019	9/12/2020
Upper Neck Load Cell	Denton IF-205	LC-280FxGFE	10/3/2019	10/2/2020

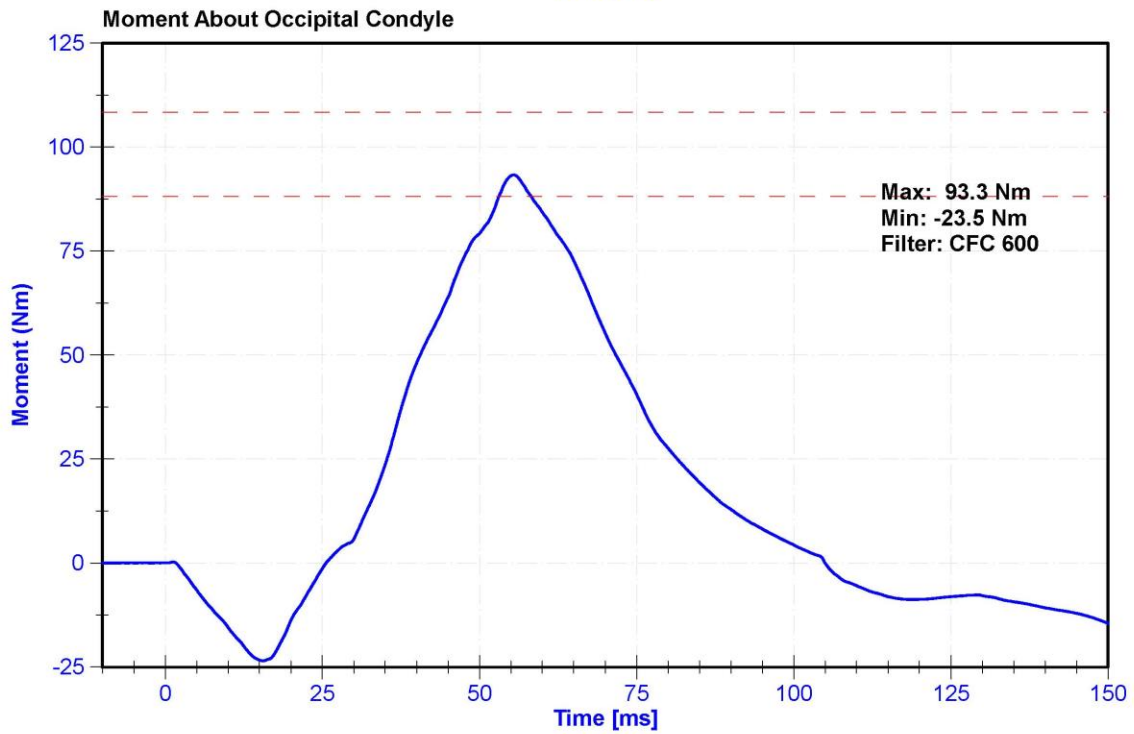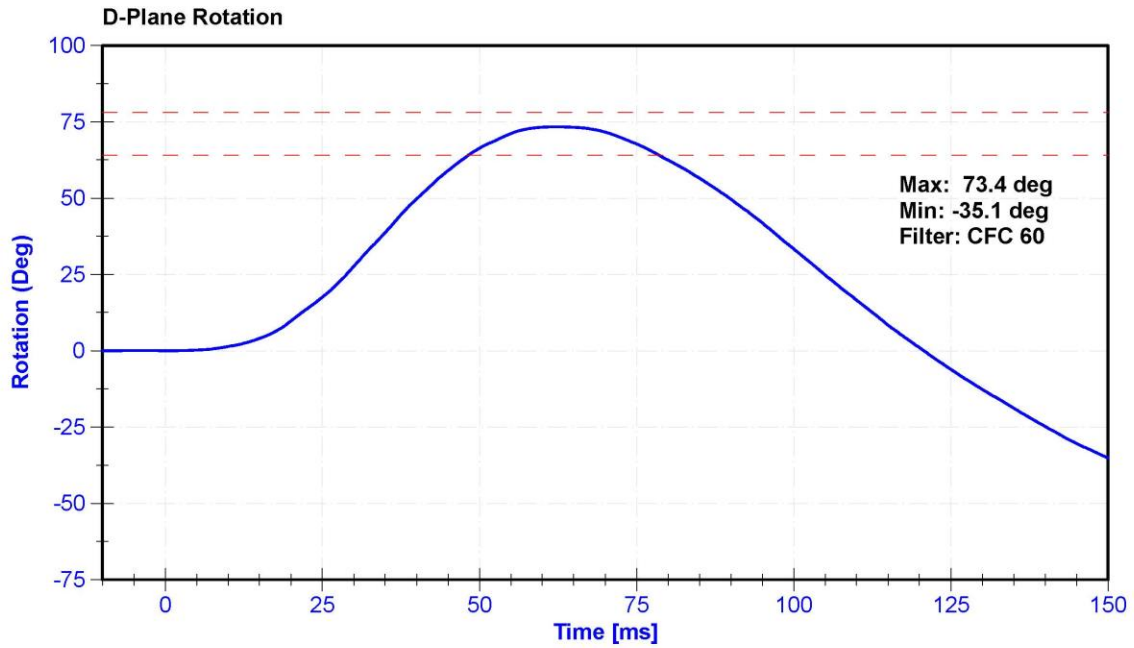

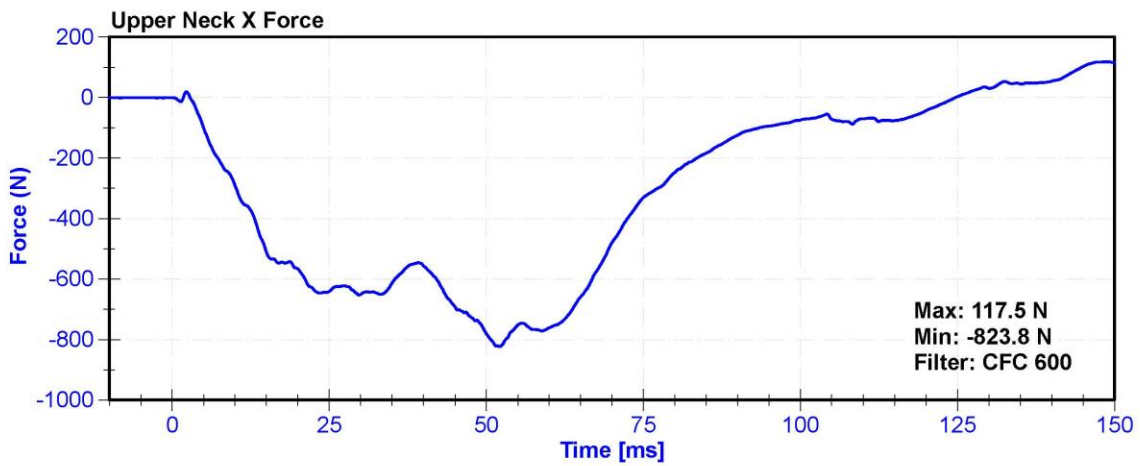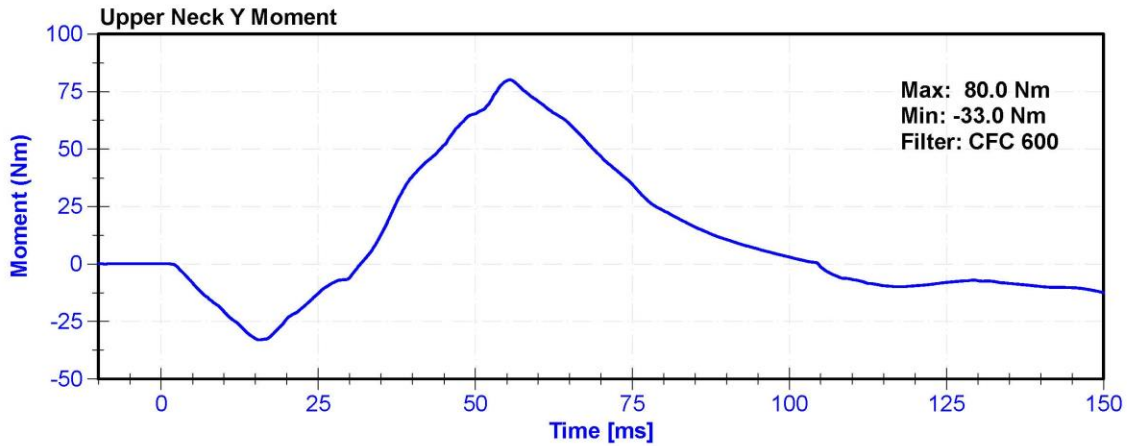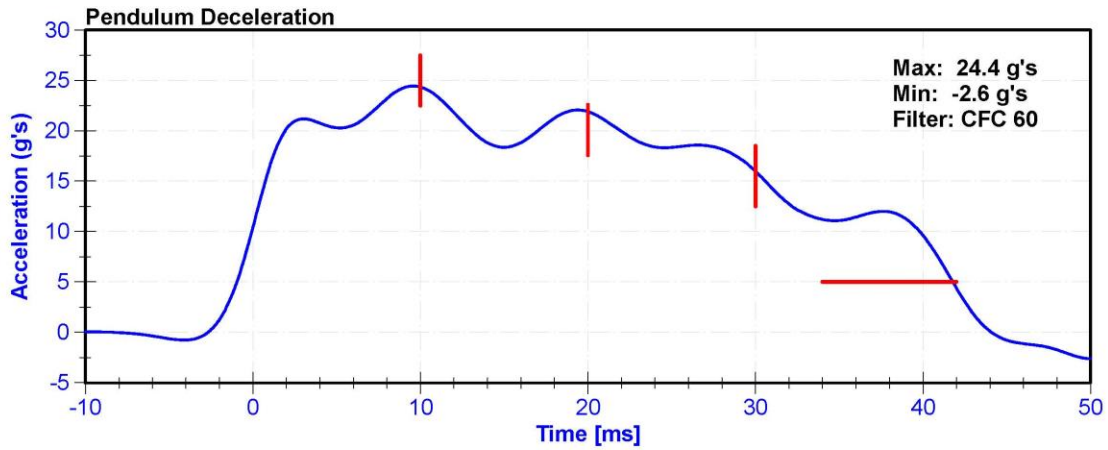

ATD Manufacturer	Humanetics	Test Technician	M. Dudek
ATD Serial Number	142	Laboratory Supervisor	K. Brogan



**Results**




Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	20.6	Pass
Humidity	10	70	%	28.1	Pass
Velocity	5.94	6.19	m/s	6.005	Pass
Pendulum Deceleration at 10ms	17.2	21.2	g's	20.82	Pass
Pendulum Deceleration at 20ms	14	19	g's	17.3	Pass
Pendulum Deceleration at 30ms	11	16	g's	14.5	Pass
Max. Pendulum Deceleration After 30ms	0	22	g's	20.9	Pass
Pendulum Deceleration Time to 5 g's	38	46	ms	41.3	Pass
Maximum D Plane Rotation	81	106	deg	96.2	Pass
Time to Maximum Rotation	72	82	ms	76.9	Pass
Rotation Decay to Zero	147	174	ms	157.4	Pass
Minimum Moment About OC	-80	-52.9	Nm	-70.24	Pass
Time to Minimum Moment	65	79	ms	71.4	Pass
Moment Decay to Zero	120	148	ms	140.0	Pass

**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	ENDEVCO 7231CT	AC-AH5M9 Pend	1/30/2020	1/29/2021
Pendulum Potentiometer	ETI SP22G	DS-LABPOT1	9/13/2019	9/12/2020
Condyle Potentiometer	ETI SP22G	DS-LABPOT2	9/13/2019	9/12/2020
Upper Neck Load Cell	Denton IF-205	LC-280FxGFE	10/3/2019	10/2/2020



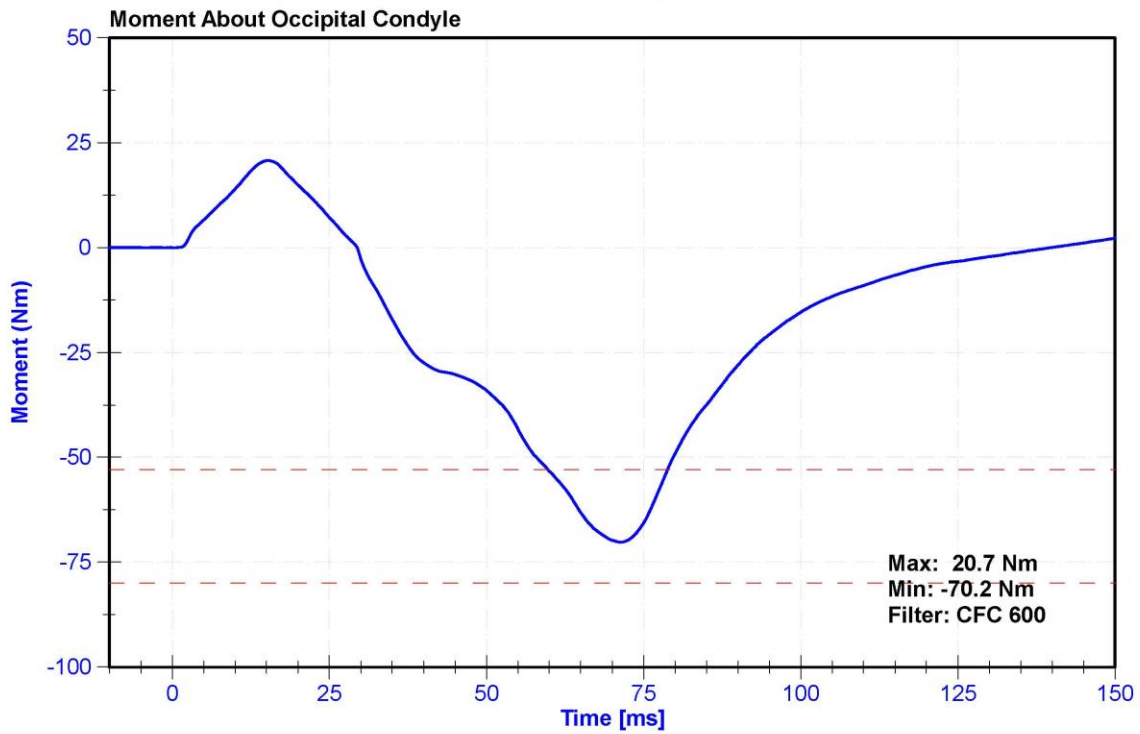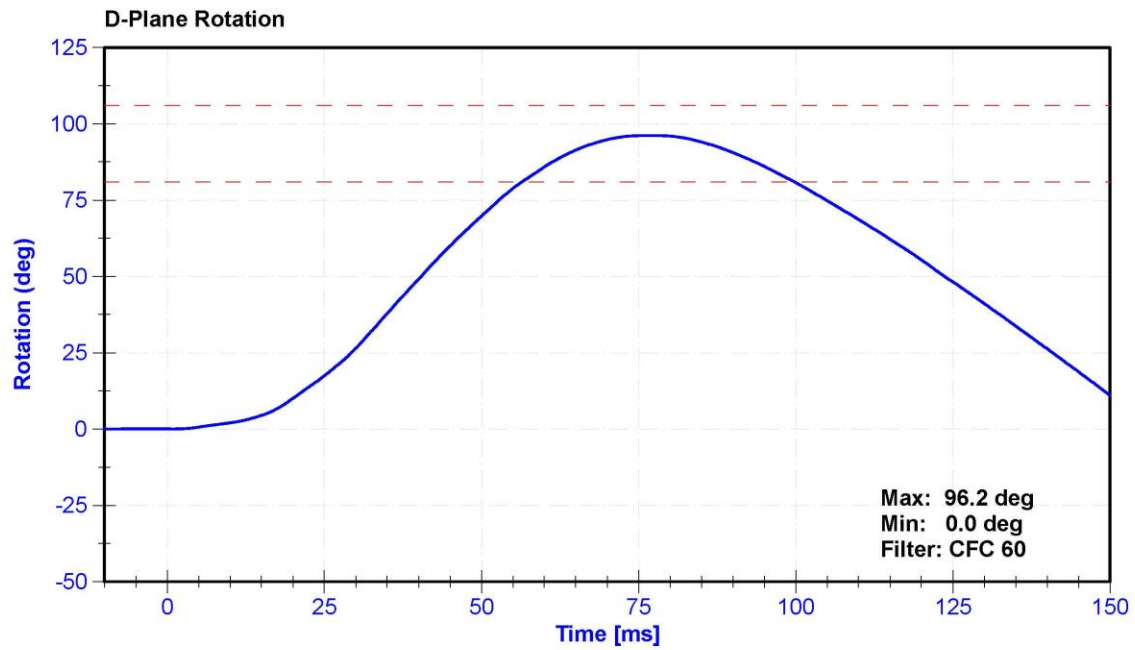

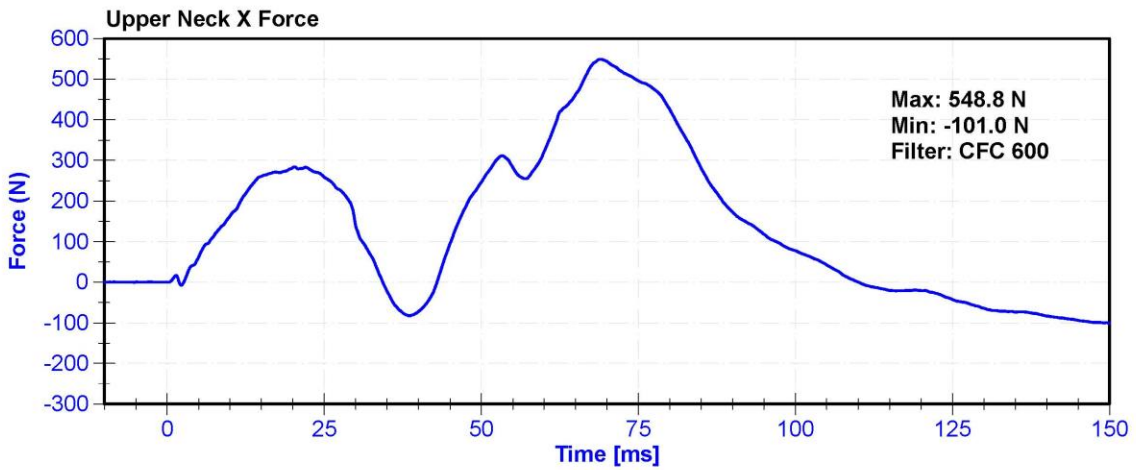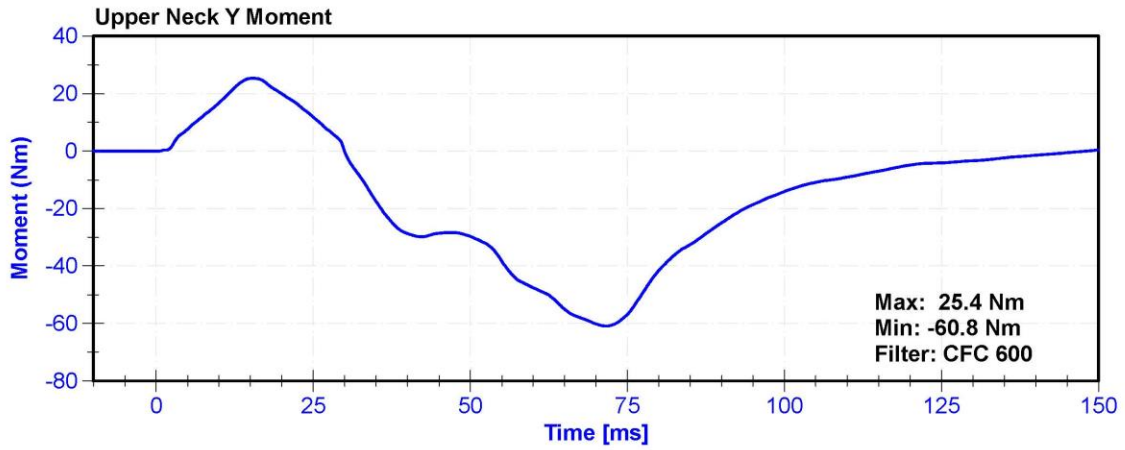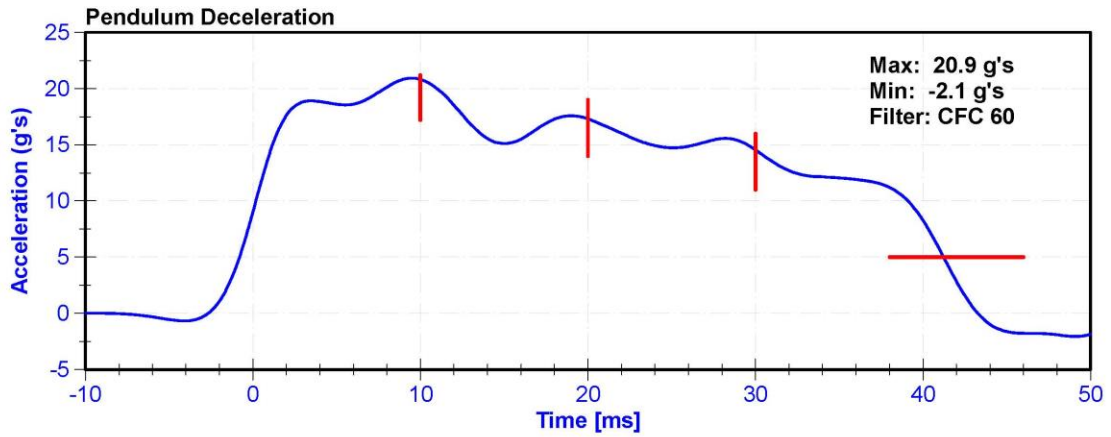


ATD Manufacturer	Humanetics	Test Technician	D.Reinhard
ATD Serial Number	142	Laboratory Supervisor	K. Brogan



**Results**



Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	20.6	Pass
Humidity	10	70	%	24	Pass
Velocity	6.59	6.83	m/s	6.714	Pass
Chest Displacement	-72.6	-63.5	mm	-67.46	Pass
Resistive Force	5160	5894	N	5877.1	Pass
Hysteresis	65	85	%	67.3	Pass

**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	MSI 64C-2000	A260568	1/29/2020	7/29/2020
Chest Potentiometer	JDK 6209-2038	DS-142	9/12/2019	9/11/2020

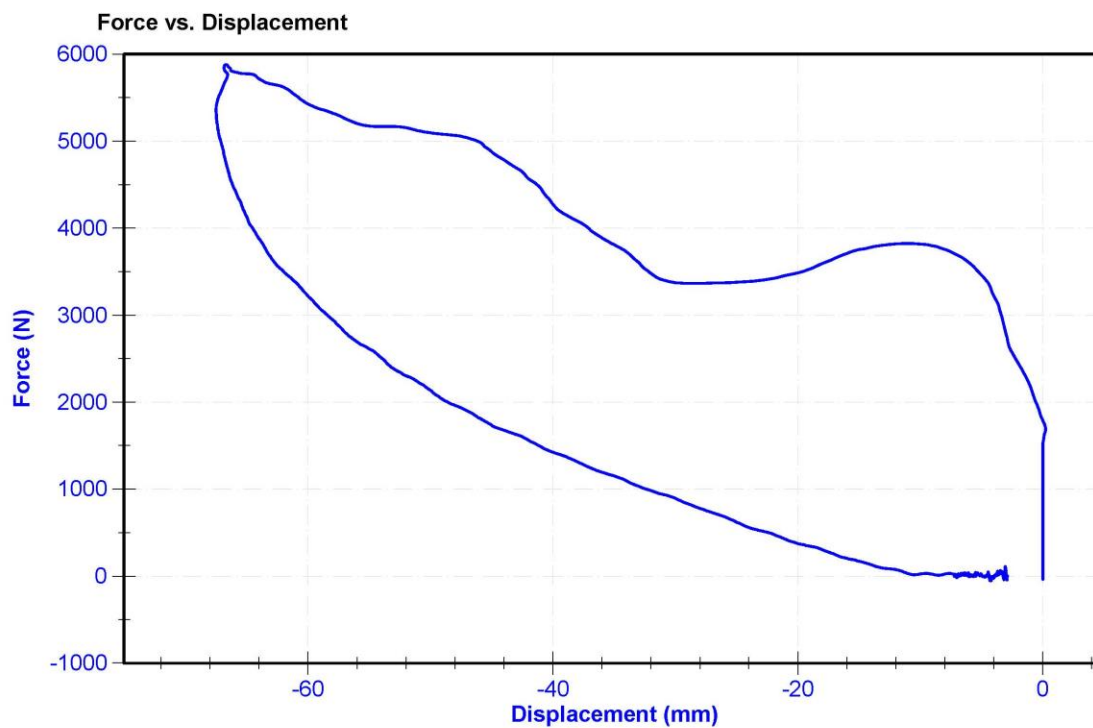

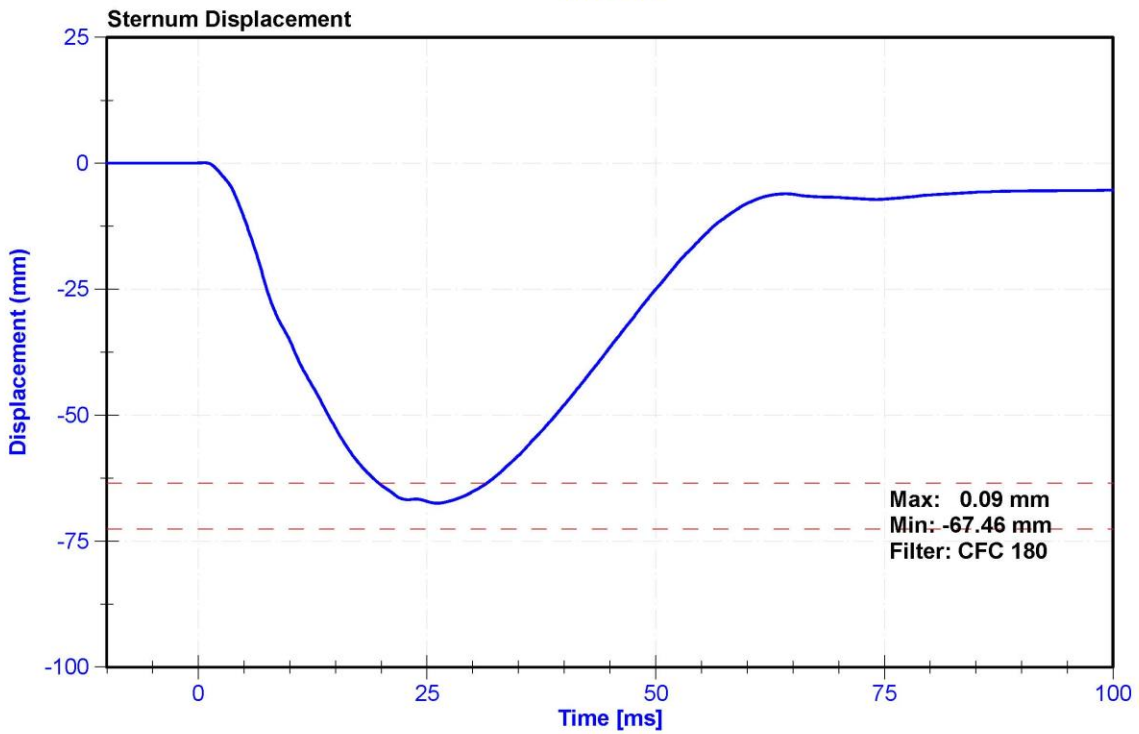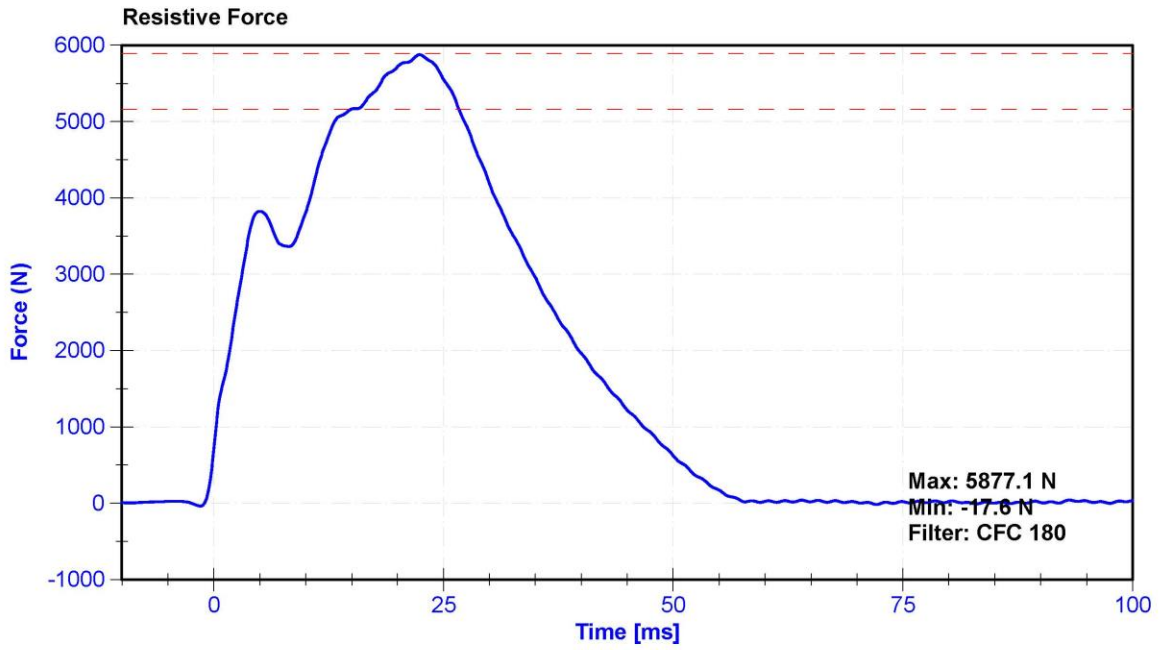

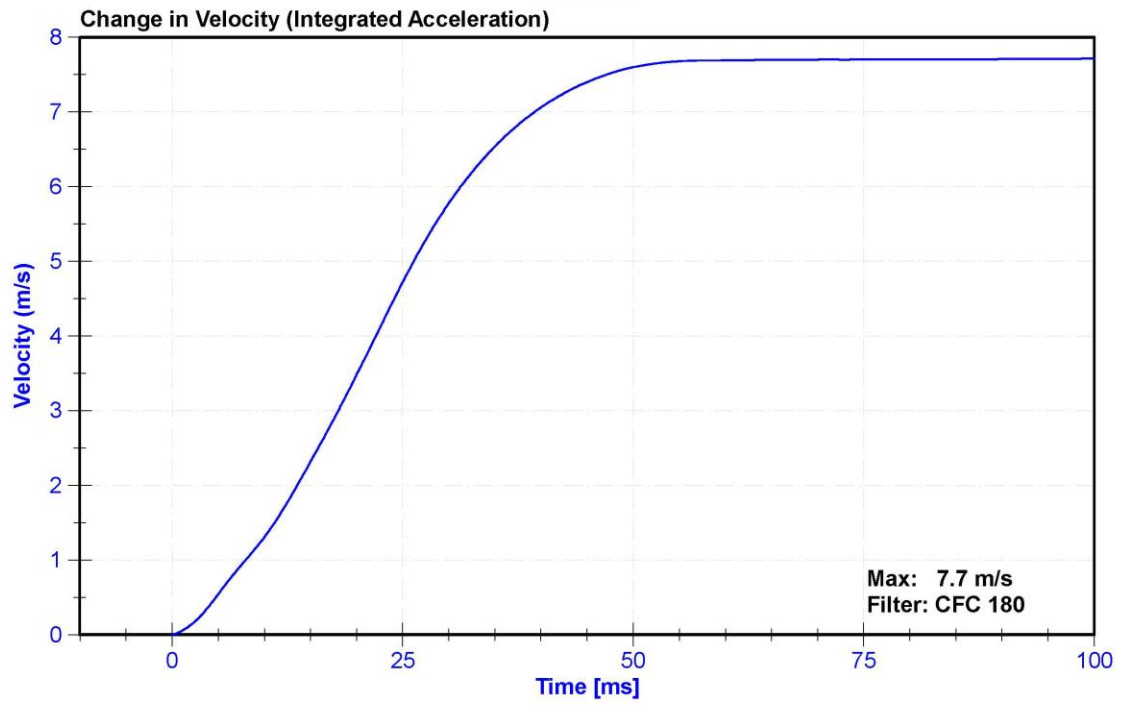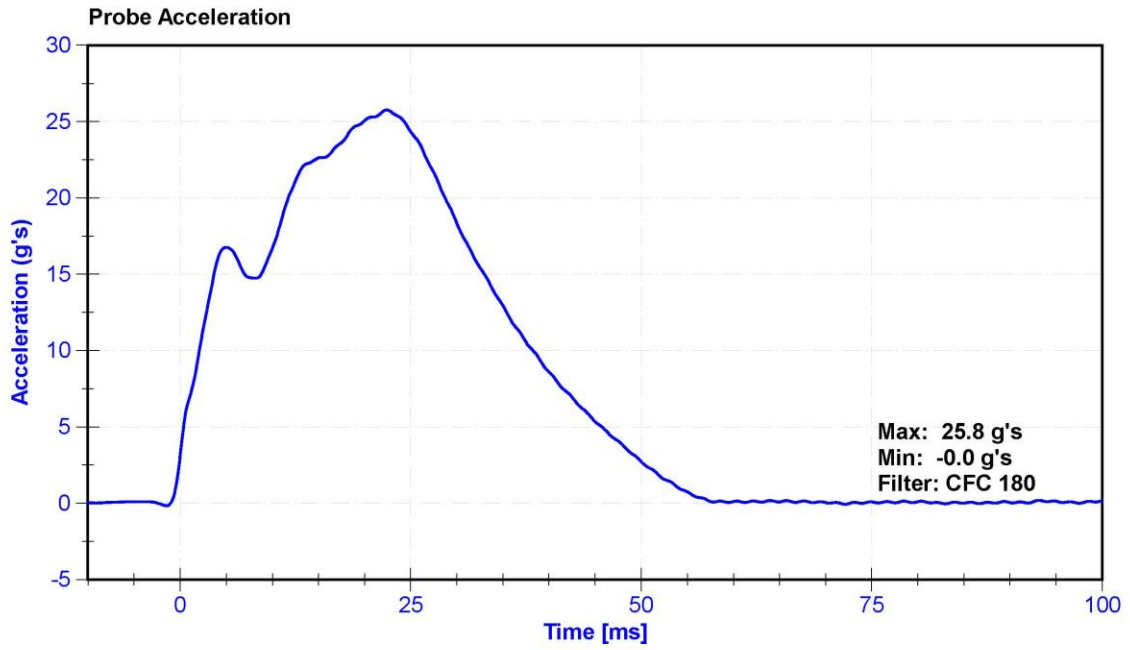


ATD Manufacturer	Humanetics	Test Technician	D.Reinhard
ATD Serial Number	142	Laboratory Supervisor	K. Brogan

**Results**

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	18.9	25.6	°C	21.0	Pass
Humidity	10	70	%	27.0	Pass
Average Velocity	5	10	deg/s	7.0	Pass
Angle at 203Nm	40	50	deg	45.8	Pass
Moment at 30 degrees	0	94.9	Nm	77.2	Pass

**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Potentiometer	ETI SP22	DS-0008	2019-09-18	2020-09-17
Load Cell	Key Trans 2301-02	LC-115 My	2019-09-12	2020-09-11

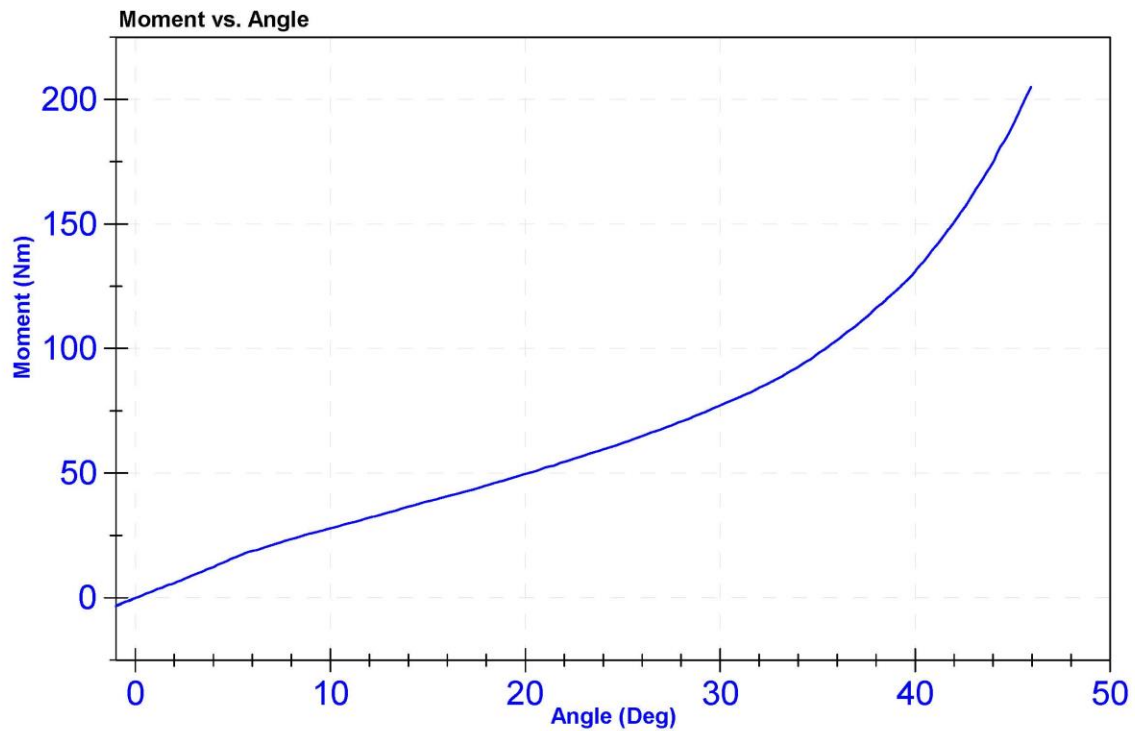


ATD Manufacturer	Humanetics	Test Technician	D.Reinhard
ATD Serial Number	142	Laboratory Supervisor	K. Brogan

**Results**

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	18.9	25.6	°C	20.7	Pass
Humidity	10	70	%	27.0	Pass
Average Velocity	5	10	deg/s	7.0	Pass
Angle at 203Nm	40	50	deg	47.5	Pass
Moment at 30 degrees	0	94.9	Nm	84.1	Pass

**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Potentiometer	ETI SP22	DS-0008	2019-09-18	2020-09-17
Load Cell	Key Trans 2301-02	LC-115 My	2019-09-12	2020-09-11

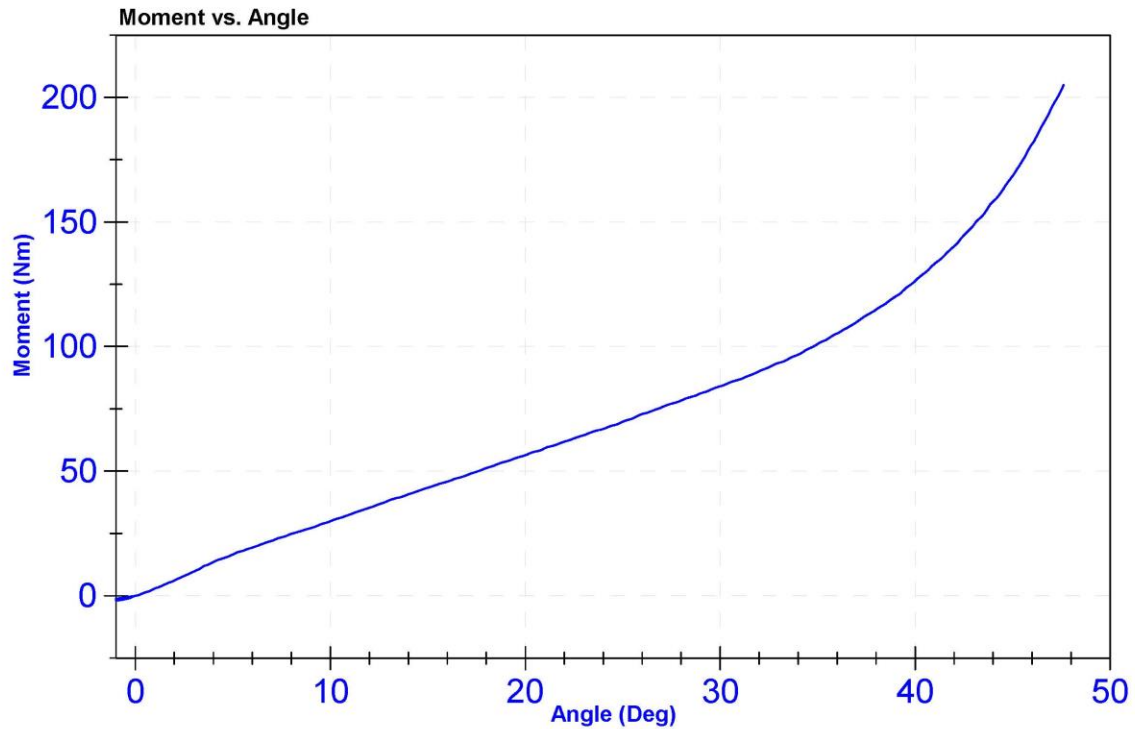


ATD Manufacturer	Humanetics	Test Technician	E. Helenbrook
ATD Serial Number	142	Laboratory Supervisor	K. Brogan

**Results**



Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	18.9	25.6	°C	21.3	Pass
Humidity	10	70	%	19.4	Pass
Velocity	2.07	2.13	m/s	2.099	Pass
Maximum Resistive Force	4720	5780	N	5019.3	Pass

**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	MSI 64C-2000	A260568	1/29/2020	1/28/2021

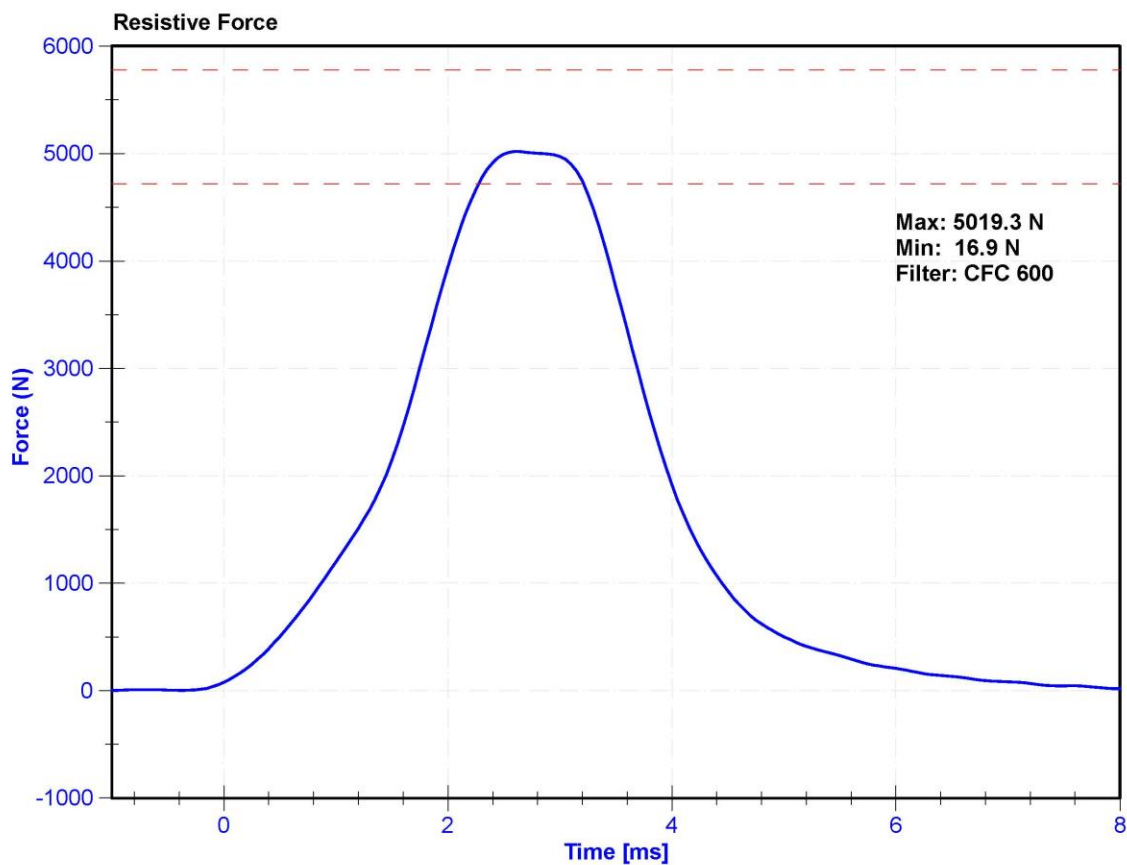



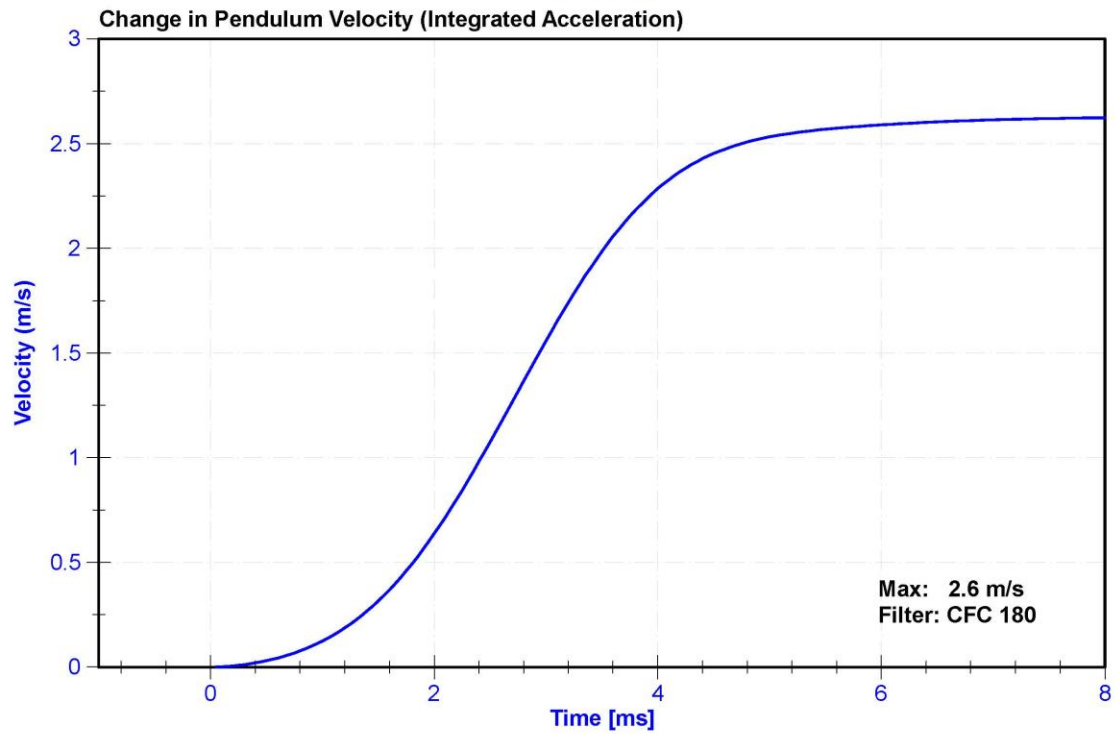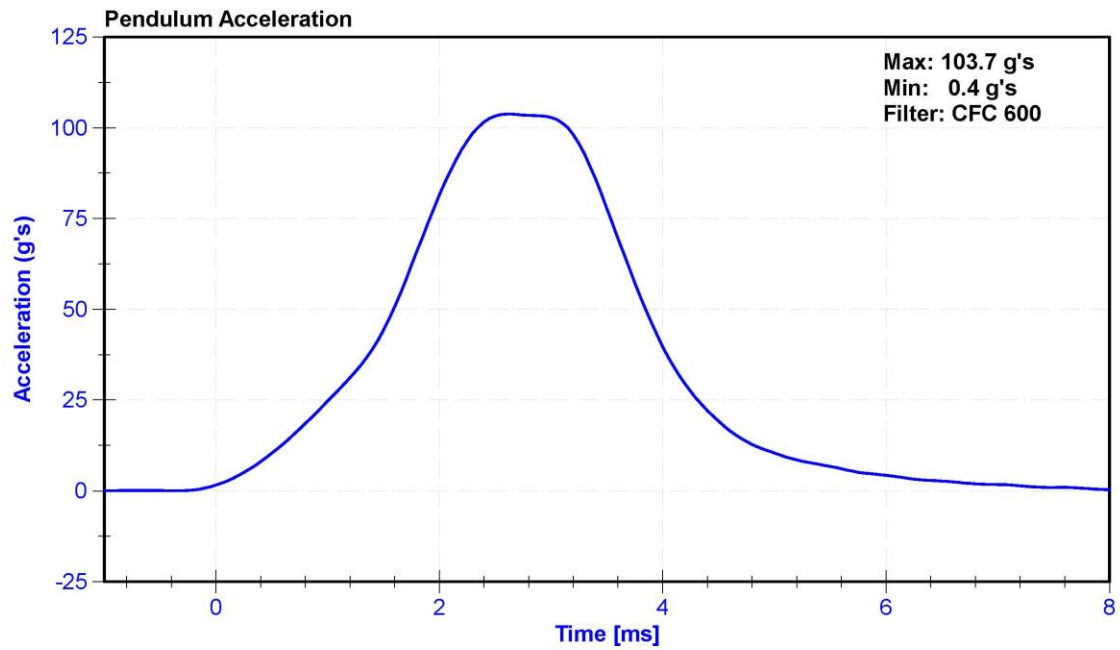


ATD Manufacturer	Humanetics	Test Technician	E. Helenbrook
ATD Serial Number	142	Laboratory Supervisor	K. Brogan



**Results**

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	18.9	25.6	°C	21.5	Pass
Humidity	10	70	%	19.4	Pass
Velocity	2.07	2.13	m/s	2.104	Pass
Maximum Resistive Force	4720	5780	N	5264.9	Pass

**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	MSI 64C-2000	A260568	1/29/2020	1/28/2021

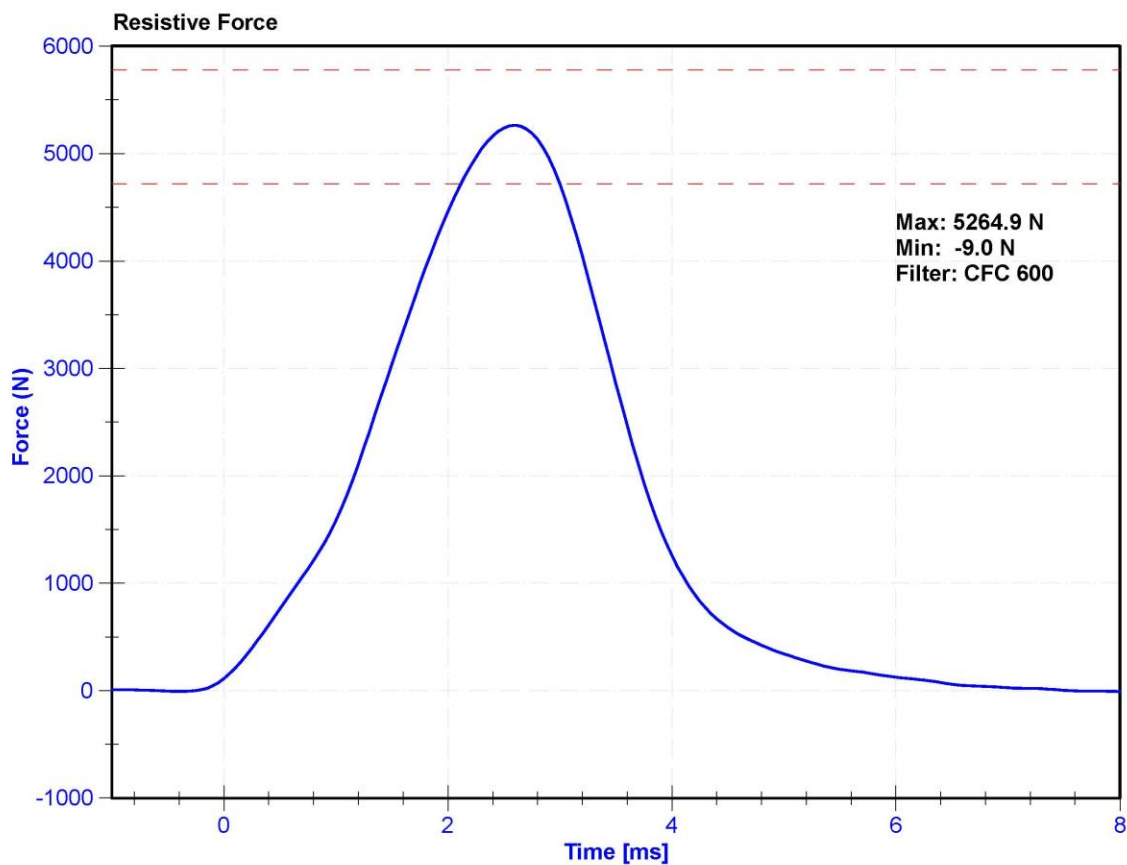

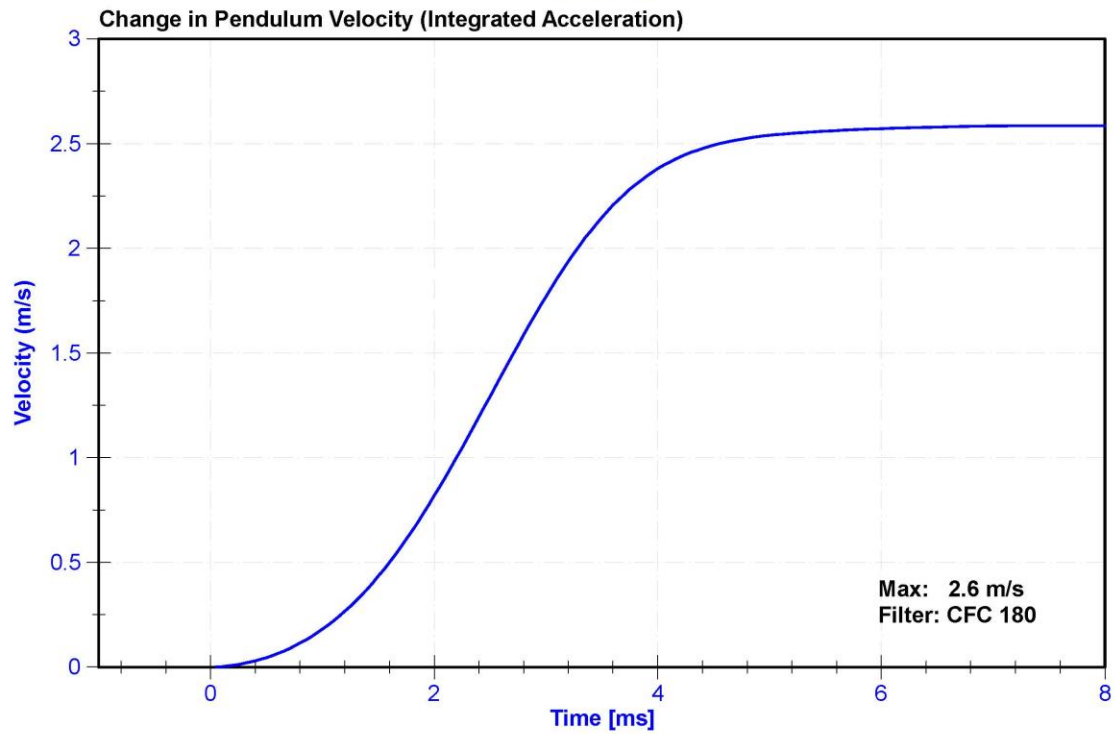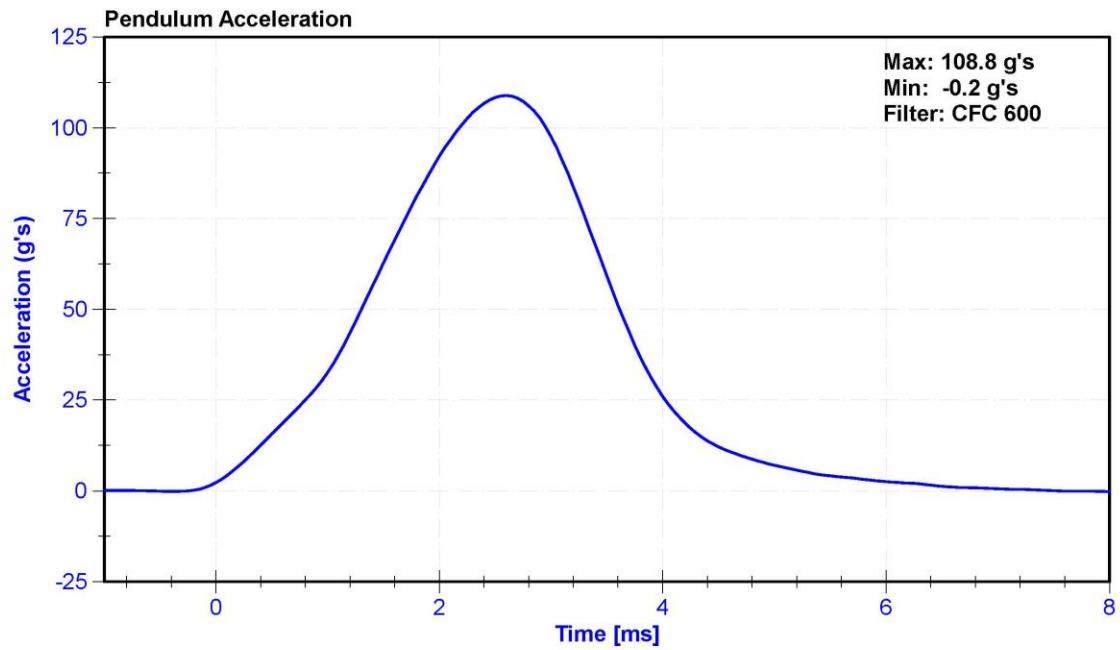

**CALIBRATION TEST RESULTS**

**POST-TEST**

**HYBRID III 5<sup>TH</sup> PERCENTILE FEMALE - PASSENGER ATD**

**SERIAL NO: 139**




External Measurements - Hybrid 3 - 5th Female

Technician: K. Brogan

Date: 03/10/2020

Dummy Serial Number: 139

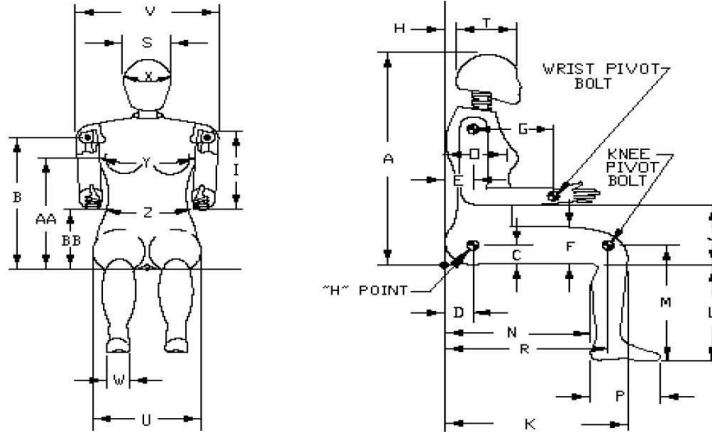

Symbol	Description	Specification (mm)		Result (mm)	Pass/Fail
A	Sitting Height	775	800	791	Pass
B	Shoulder Pivot Height	432	457	447	Pass
C	H-Point Height	81	86	84	Pass
D	H-Point from Backline	145	150	146	Pass
E	Shoulder Pivot from Backline	69	84	78	Pass
F	Thigh Clearance	119	135	125	Pass
G	Back of Elbow to Wrist Pivot	244	259	254	Pass
H	Head Back to Backline	43	48	45	Pass
I	Shoulder to Elbow Length	277	297	289	Pass
J	Elbow Rest Height	183	203	190	Pass
K	Buttock to Knee Length	521	546	541	Pass
L	Popliteal Height	356	376	363	Pass
M	Knee Pivot Height	394	419	402	Pass
N	Buttock Popliteal Length	414	439	426	Pass
O	Chest Depth without Jacket	175	191	185	Pass
P	Foot Length (right)	219	234	225	Pass
R	Buttock To Knee Pivot Length	457	483	473	Pass
S	Head Breadth	137	147	143	Pass
T	Head Depth	178	188	182	Pass
U	Hip Breadth	300	315	310	Pass
V	Shoulder Breadth	351	366	362	Pass
W	Foot Breadth	79	94	87	Pass
X	Head Circumference	528	549	535	Pass
Y	Chest Circumference with Jacket	851	881	861	Pass
Z	Waist Circumference	460	790	773	Pass
AA	Reference Location (Chest Circumference)	333	358	345	Pass
BB	Reference Location (Waist Circumference)	160	170	165	Pass


ATD Manufacturer	Denton	Test Technician	C. Mantell
ATD Serial Number	139	Laboratory Supervisor	K. Brogan




**Results**

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	18.9	25.6	°C	21.9	Pass
Humidity	10	70	%	33.2	Pass
Resultant Acceleration	250	300	g's	288.8	Pass
Oscillation	0	10	%	1.9	Pass
Lateral Acceleration	-15	15	g's	-6.6	Pass

**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
X Accelerometer	ENDEVCO 7264CT	AC-P51945	10/21/2019	4/20/2020
Y Accelerometer	ENDEVCO 7264CT	AC-P51974	10/21/2019	4/20/2020
Z Accelerometer	ENDEVCO 7264CT	AC-P51946	10/21/2019	4/20/2020

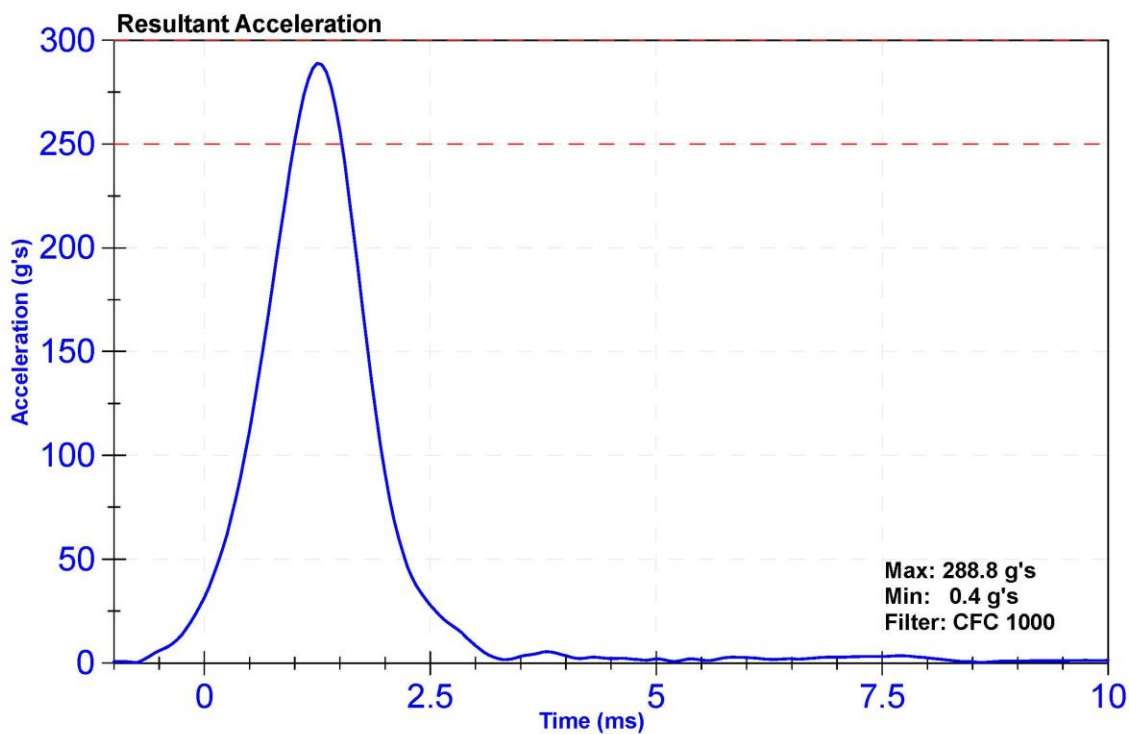

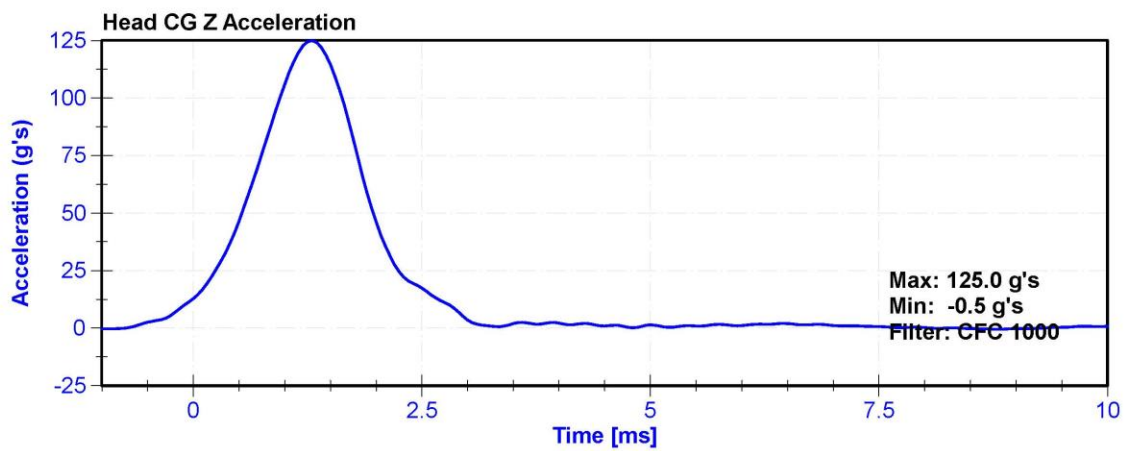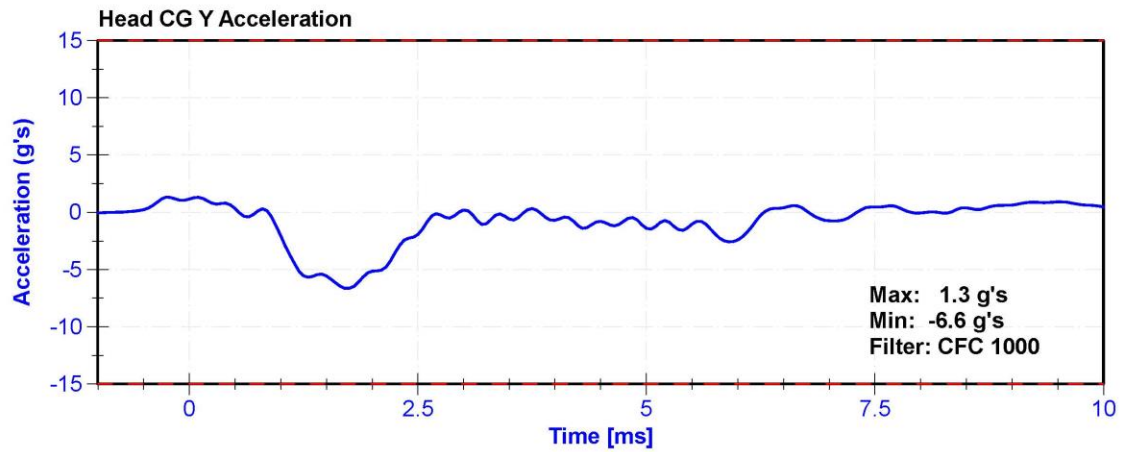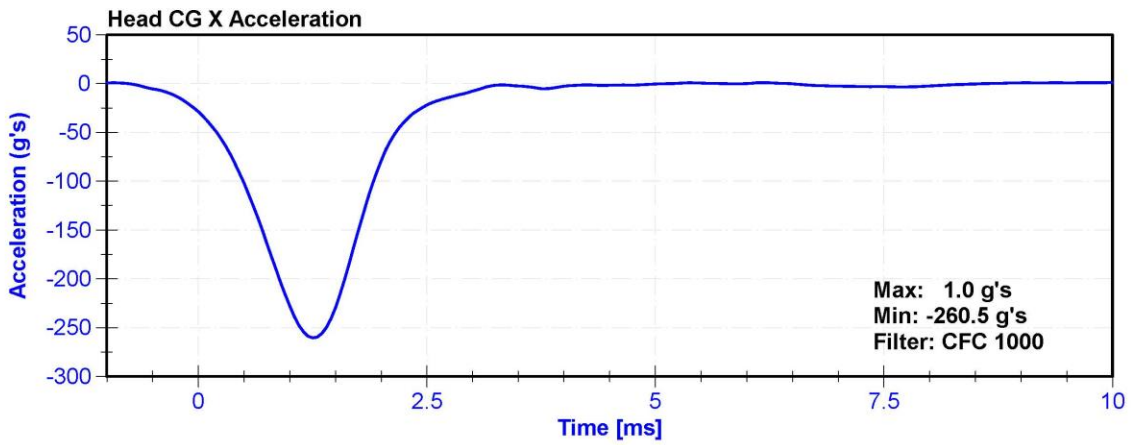


ATD Manufacturer	Denton	Test Technician	C. Mantell
ATD Serial Number	139	Laboratory Supervisor	K. Brogan

**Results**



Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	22.0	Pass
Humidity	10	70	%	33.0	Pass
Velocity	6.89	7.13	m/s	6.903	Pass
Pendulum Impulse at 10ms	2.1	2.5	m/s	2.31	Pass
Pendulum Impulse at 20ms	4.0	5.0	m/s	4.64	Pass
Pendulum Impulse at 30ms	5.8	7.0	m/s	6.61	Pass
Max D Plane Rotation	77	91	deg	87.6	Pass
Max Moment During Rotation Interval	69	83	Nm	73.4	Pass
Moment Decay to 10.0 Nm	80	100	ms	84.9	Pass




**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	ENDEVCO 7231CT	AC-AH5M9 Pend	1/30/2020	1/29/2021
Pendulum Potentiometer	ETI SP22G	DS-LABPOT1	9/13/2019	9/12/2020
Condyle Potentiometer	ETI SP22G	DS-LABPOT2	9/13/2019	9/12/2020
Upper Neck Load Cell	Denton 1716A	LC-1916Fx	10/3/2019	10/2/2020

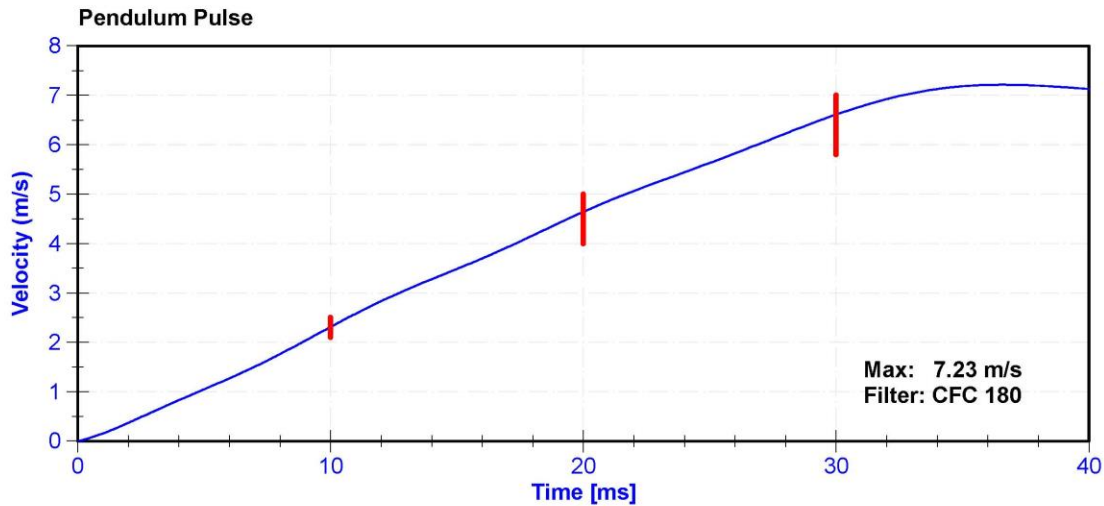



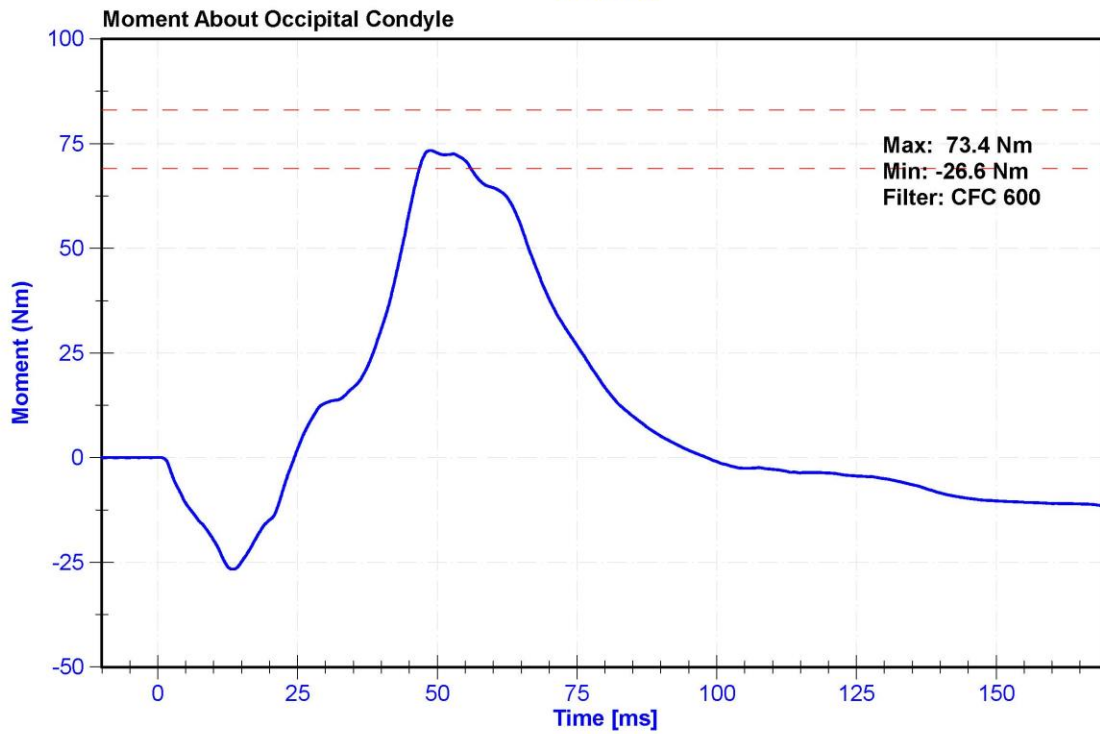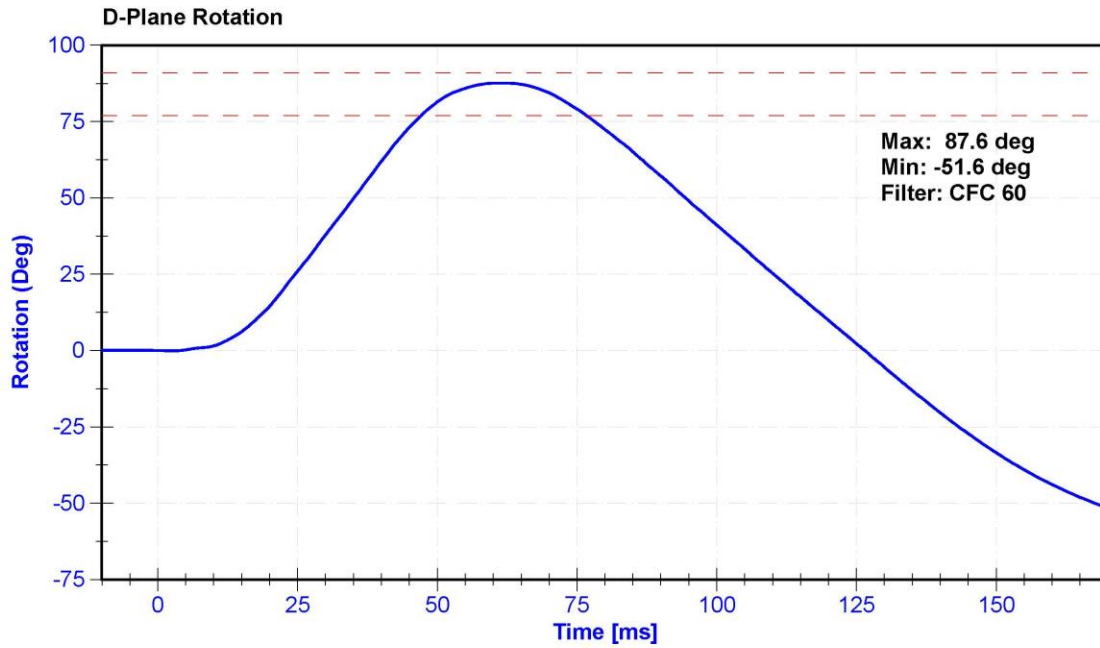

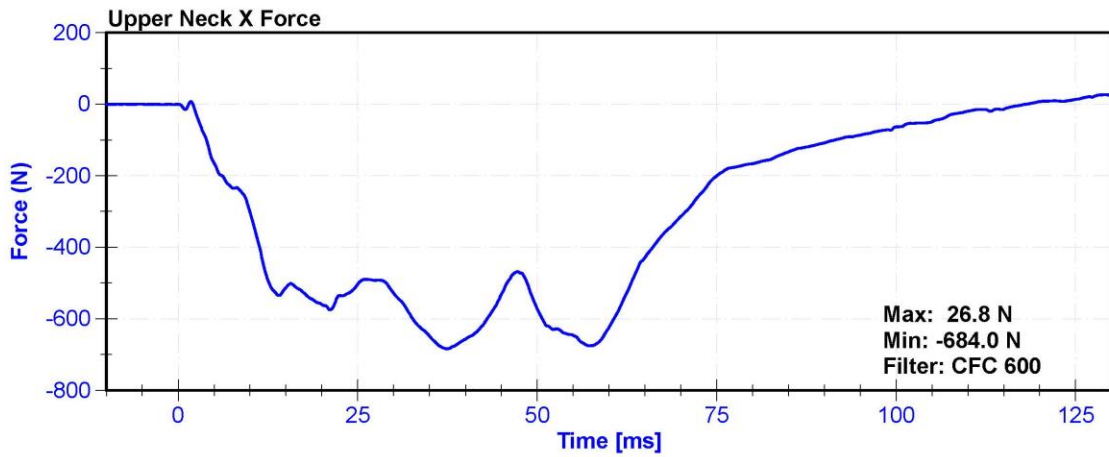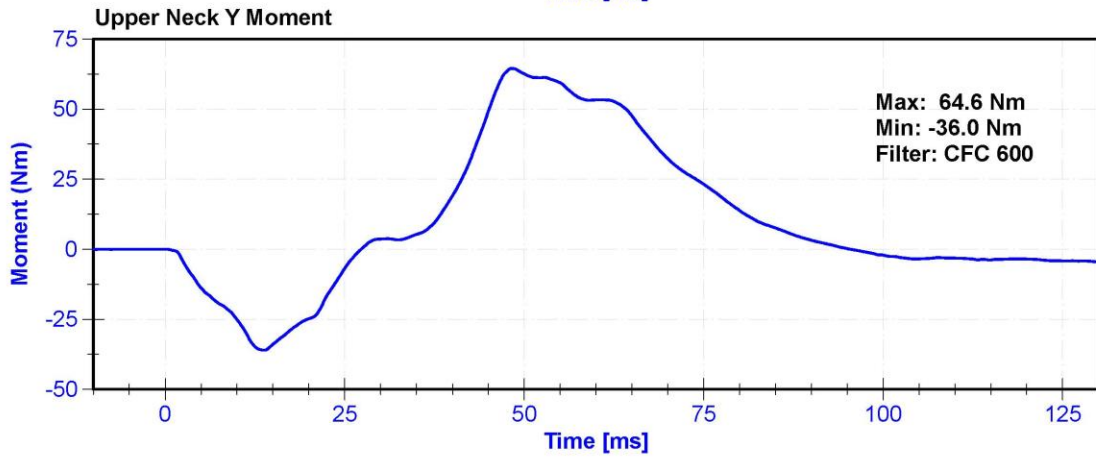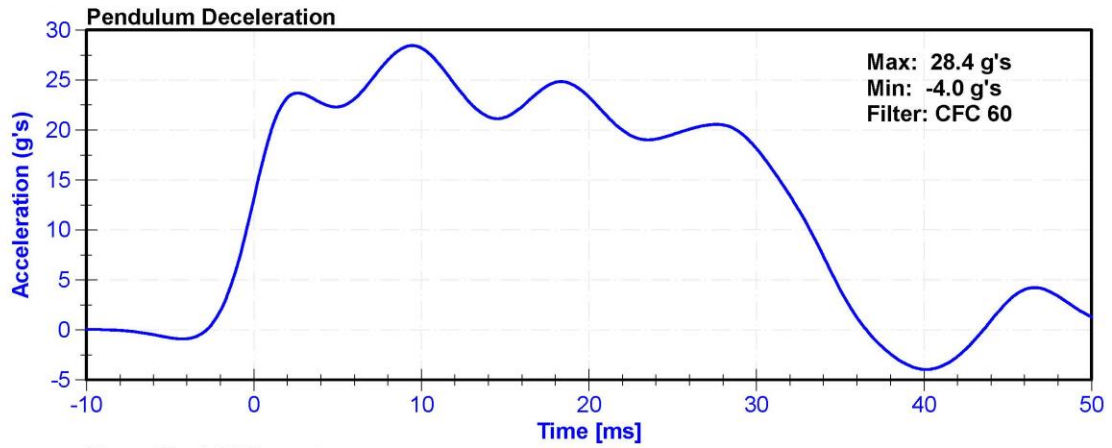


ATD Manufacturer	Denton	Test Technician	C. Mantell
ATD Serial Number	139	Laboratory Supervisor	K. Brogan



**Results**




Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21.9	Pass
Humidity	10	70	%	32.8	Pass
Velocity	5.95	6.19	m/s	6.046	Pass
Pendulum Impulse at 10ms	1.5	1.9	m/s	1.59	Pass
Pendulum Impulse at 20ms	3.1	3.9	m/s	3.30	Pass
Pendulum Impulse at 30ms	4.6	5.6	m/s	4.94	Pass
D Plane Rotation	99	114	deg	110.0	Pass
Moment During Rotation Interval	-65	-53	Nm	-59.8	Pass
Moment Decay to -10Nm	94	114	ms	102.9	Pass

**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	ENDEVCO 7231CT	AC-AH5M9 Pend	1/30/2020	1/29/2021
Pendulum Potentiometer	ETI SP22G	DS-LABPOT1	9/13/2019	9/12/2020
Condyle Potentiometer	ETI SP22G	DS-LABPOT2	9/13/2019	9/12/2020
Upper Neck Load Cell	Denton 1716A	LC-1916Fx	10/3/2019	10/2/2020

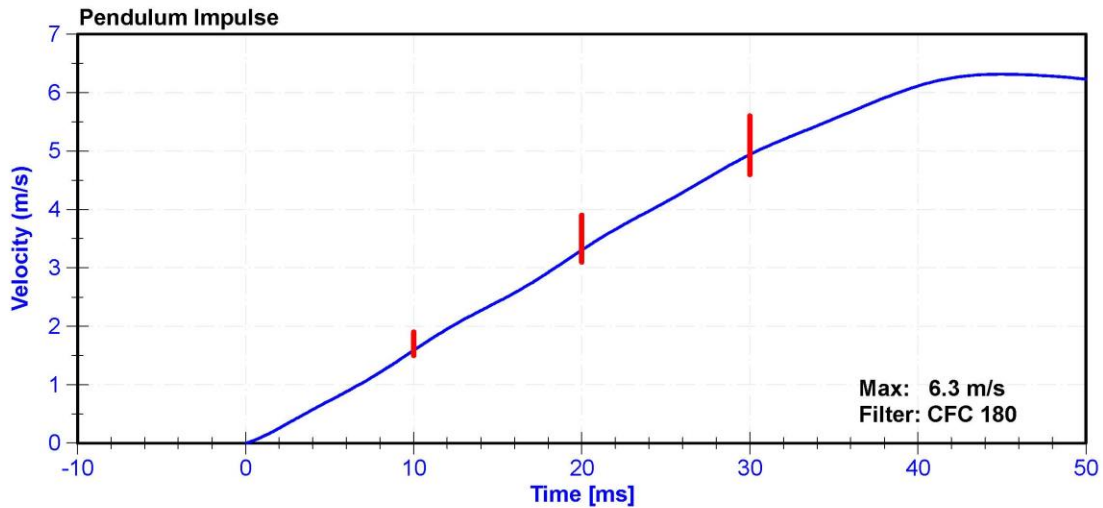

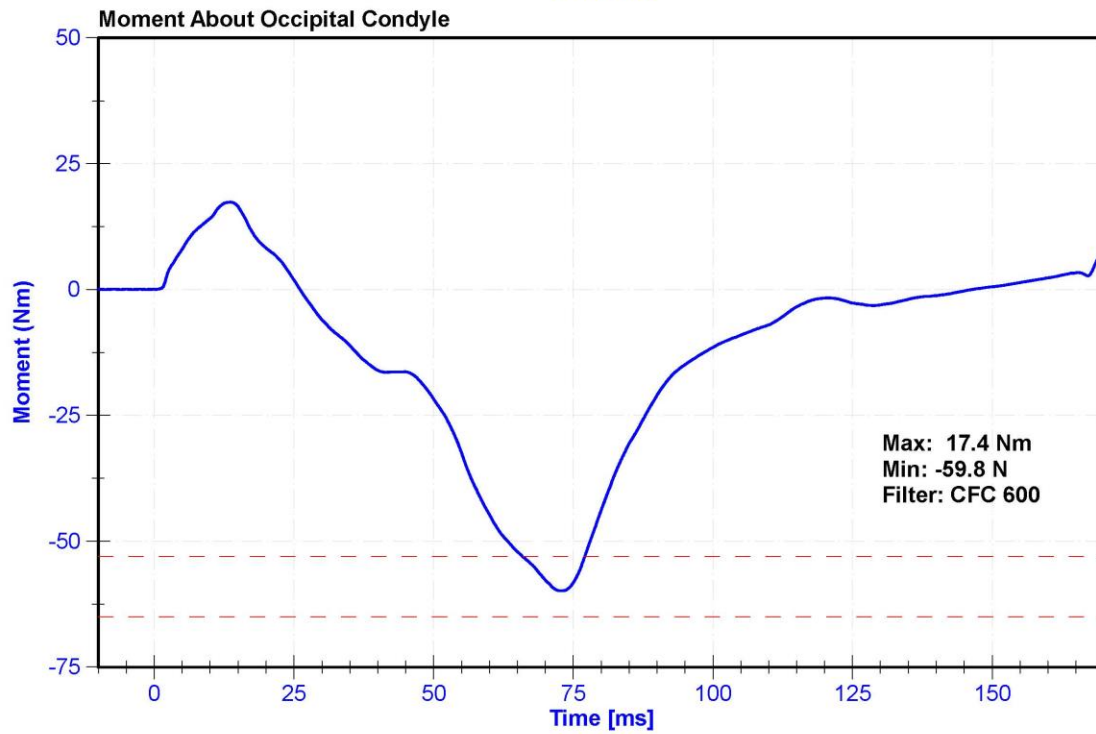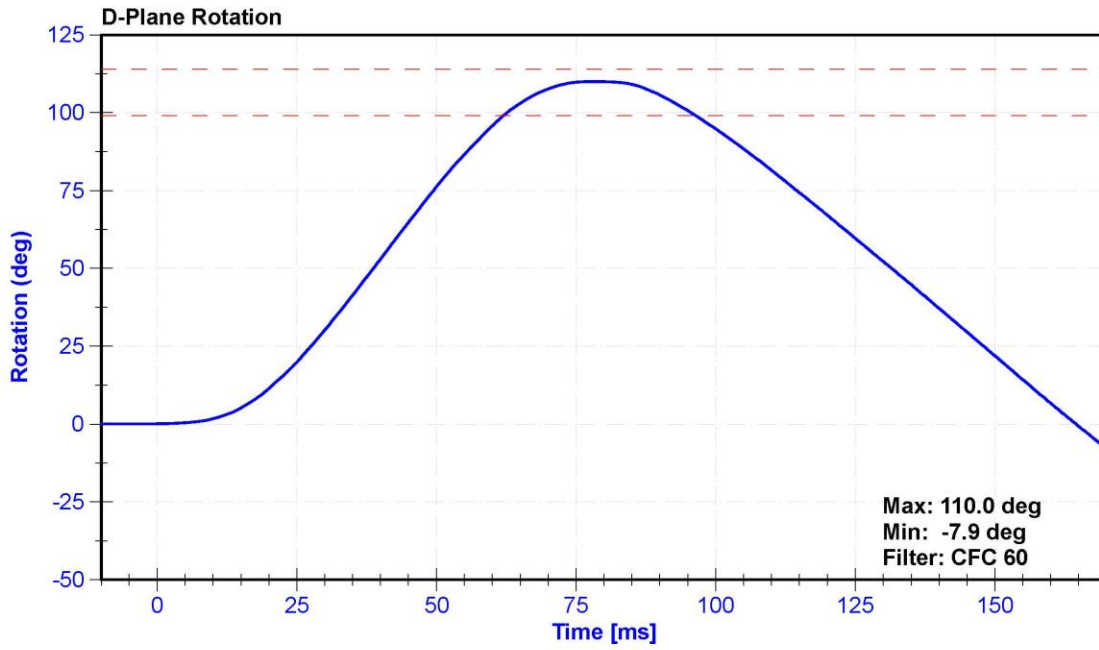

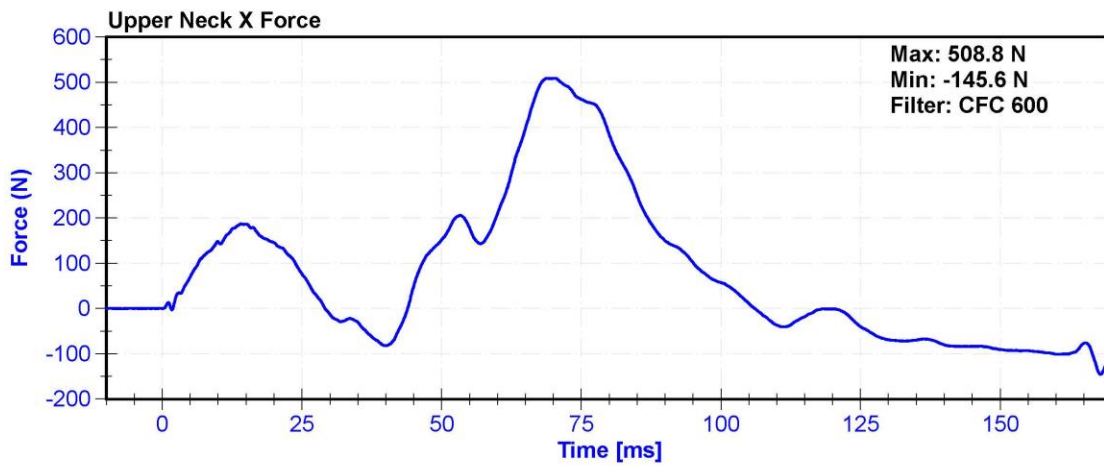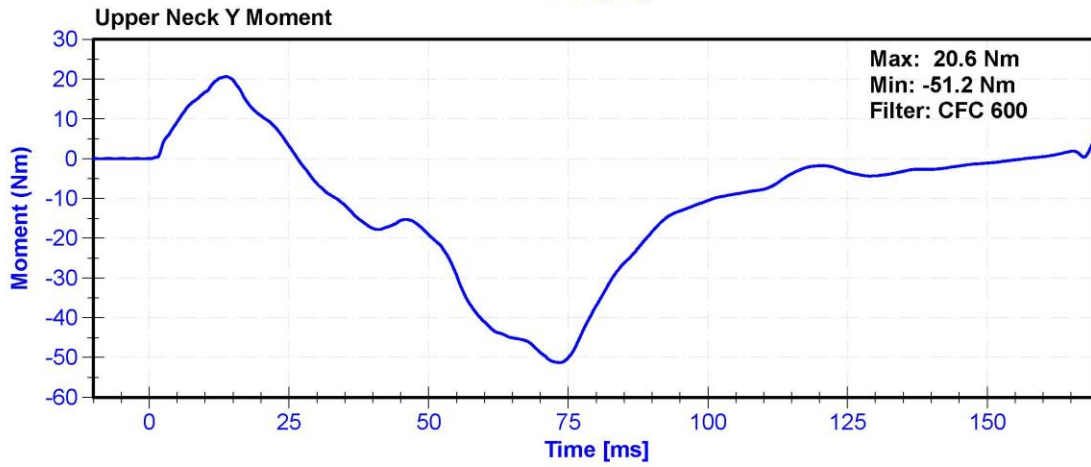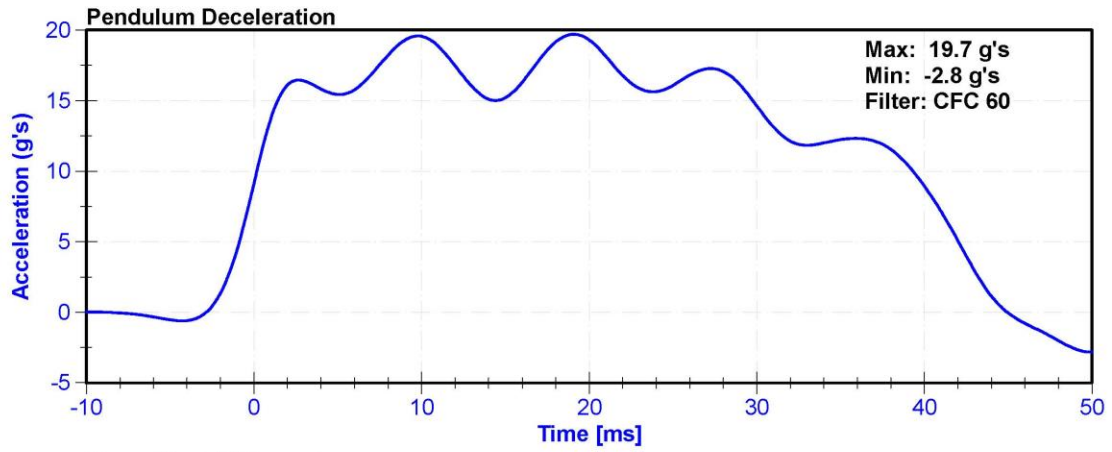


ATD Manufacturer	Denton	Test Technician	D.Reinhard
ATD Serial Number	139	Laboratory Supervisor	K. Brogan



**Results**

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21	Pass
Humidity	10	70	%	26	Pass
Velocity	6.59	6.83	m/s	6.743	Pass
Chest Deflection	-58	-50	mm	-55.7	Pass
Maximum Resistive Force (50 to 58mm)	3900	4400	N	4150.3	Pass
Maximum Resistive Force (18 to 50mm)	0	4600	N	3967.3	Pass
Hysteresis	69	85	%	70.1	Pass


**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	MSI 64C-2000	A260568	1/29/2020	7/29/2020
Chest Potentiometer	SERVO 14CB1-2897	DS-288GFE	10/23/2019	4/22/2020

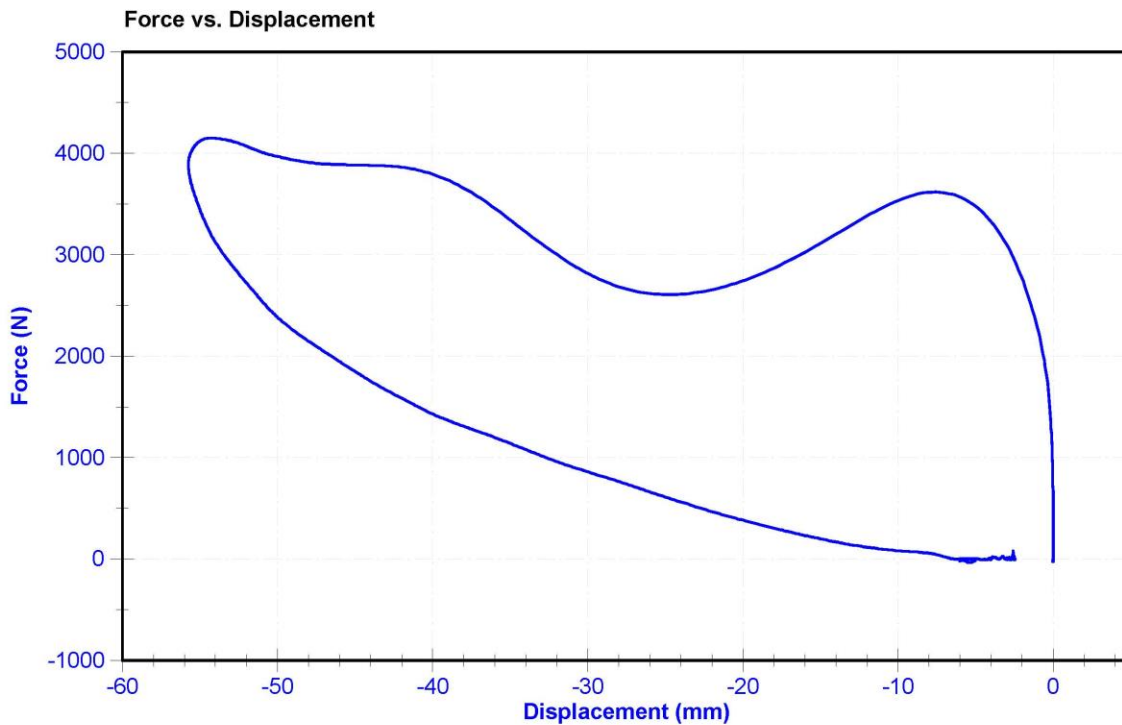


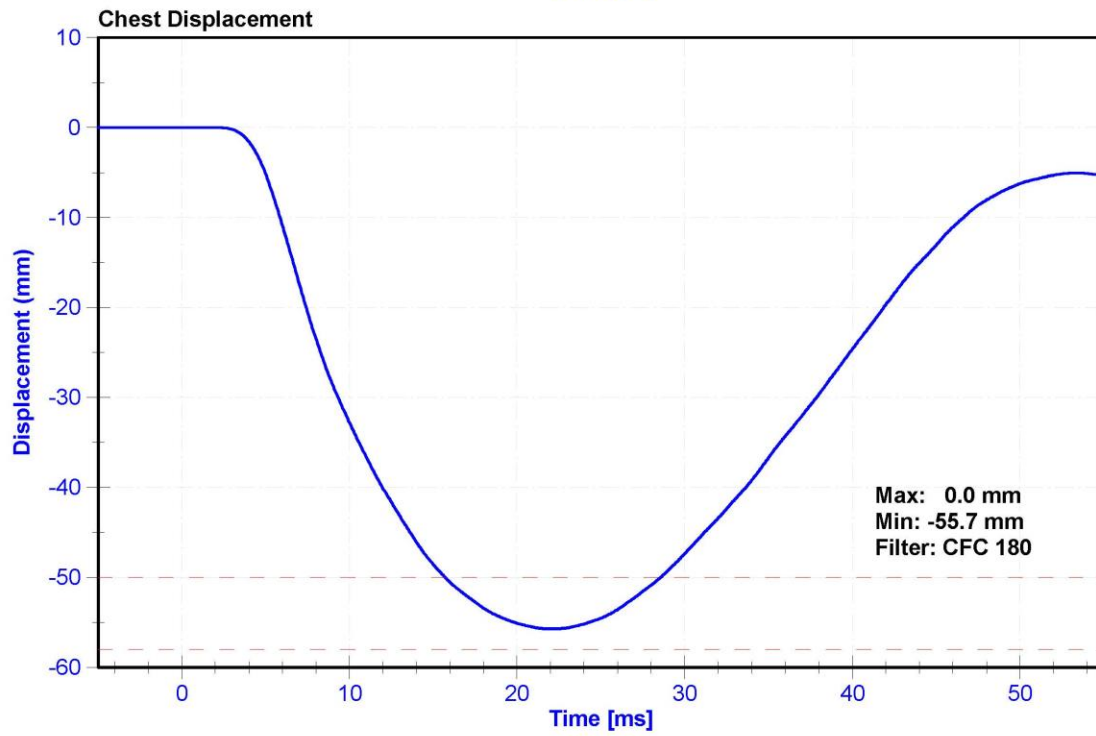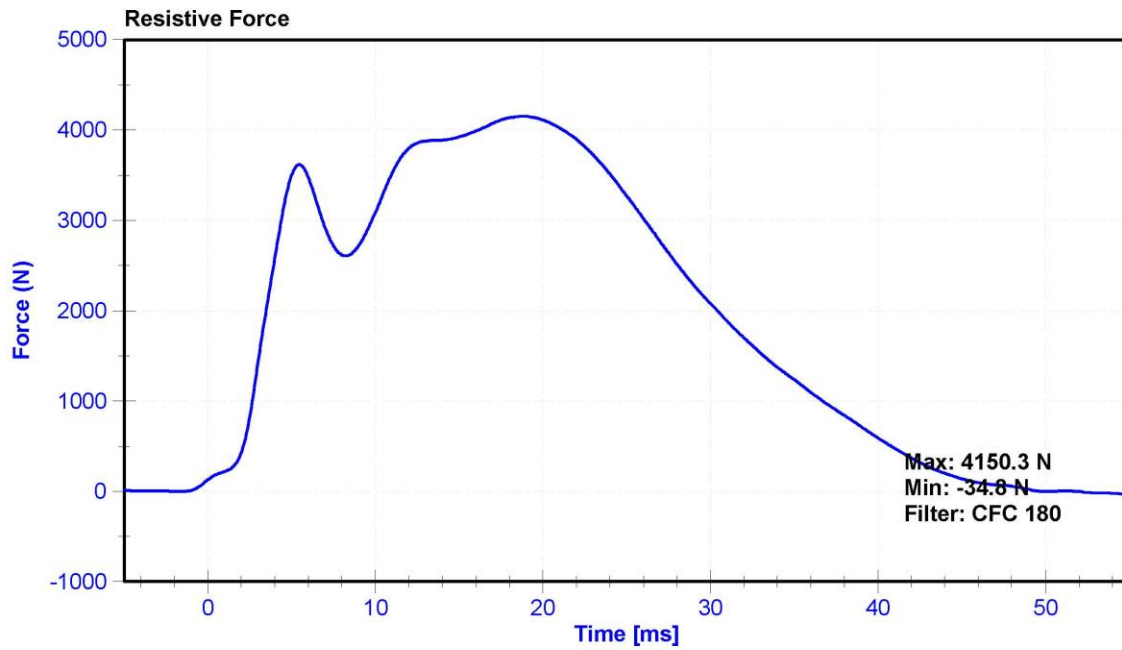

Probe Acceleration

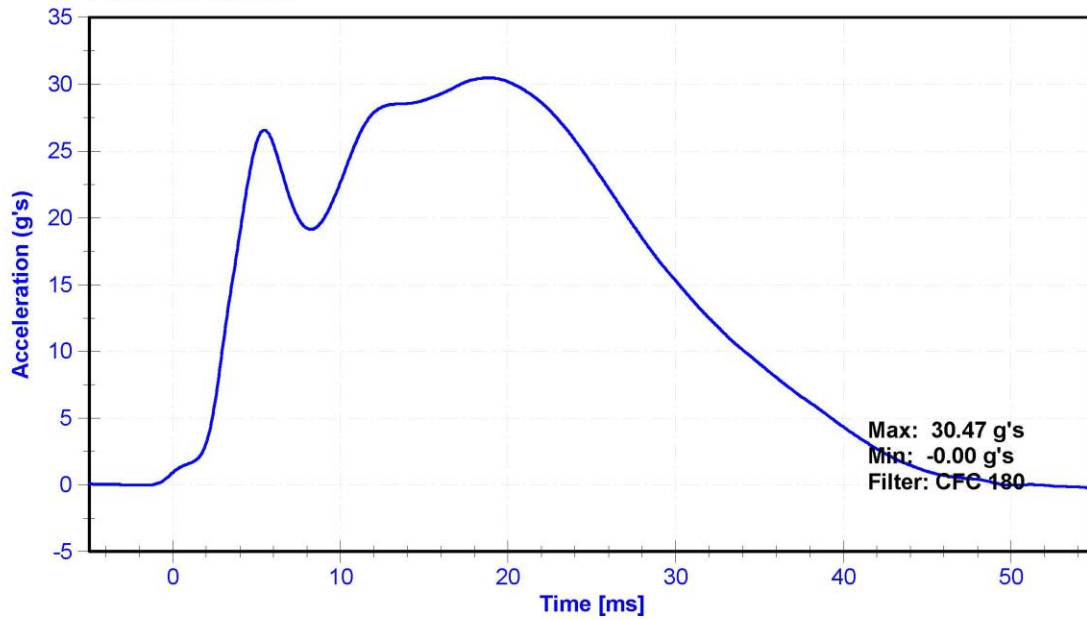

Change in Velocity (Integrated Acceleration)

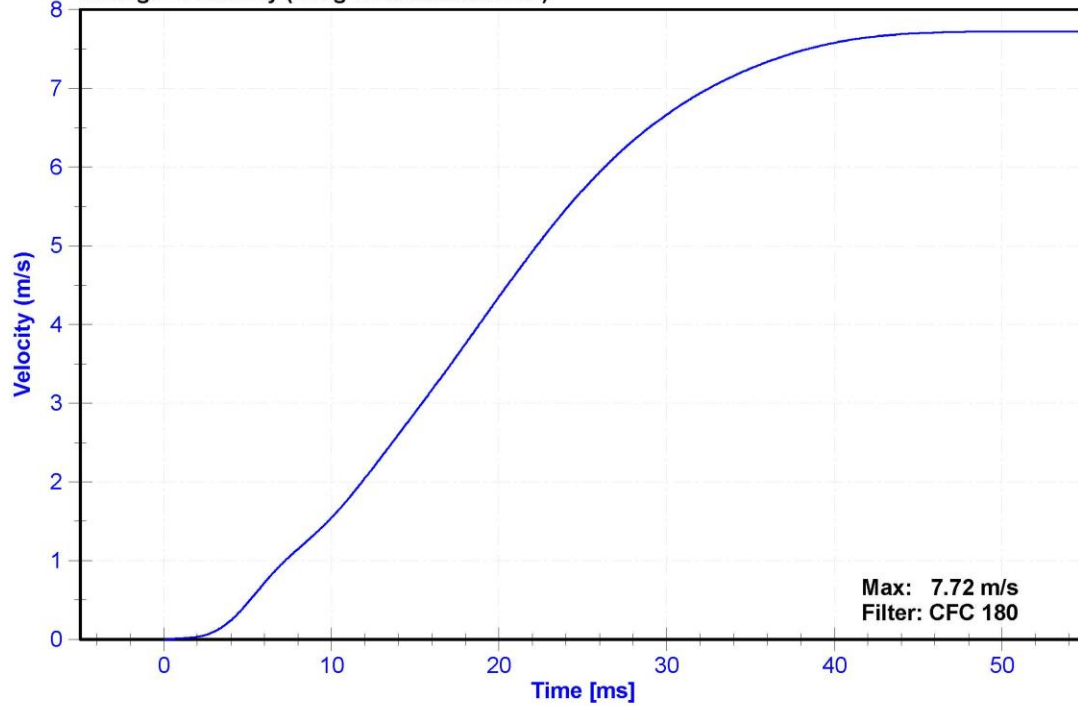



ATD Manufacturer	Denton	Test Technician	D.Reinhard
ATD Serial Number	139	Laboratory Supervisor	B. Krogan


**Results**

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	18.6	25.6	°C	21	Pass
Humidity	10	70	%	23	Pass
Initial Angle	0	20	deg	15.6	Pass
Force at 45 Degrees	320	390	N	374.8	Pass
Return Angle Relative to Initial	0	8	deg	0.9	Pass

**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Potentiometer	Rieker N4C-1	DS-13051548	2019-12-09	2020-12-08
Load Cell	Interface SML-200	LC-493319	2020-01-10	2021-01-09

**Force vs. Displacement**

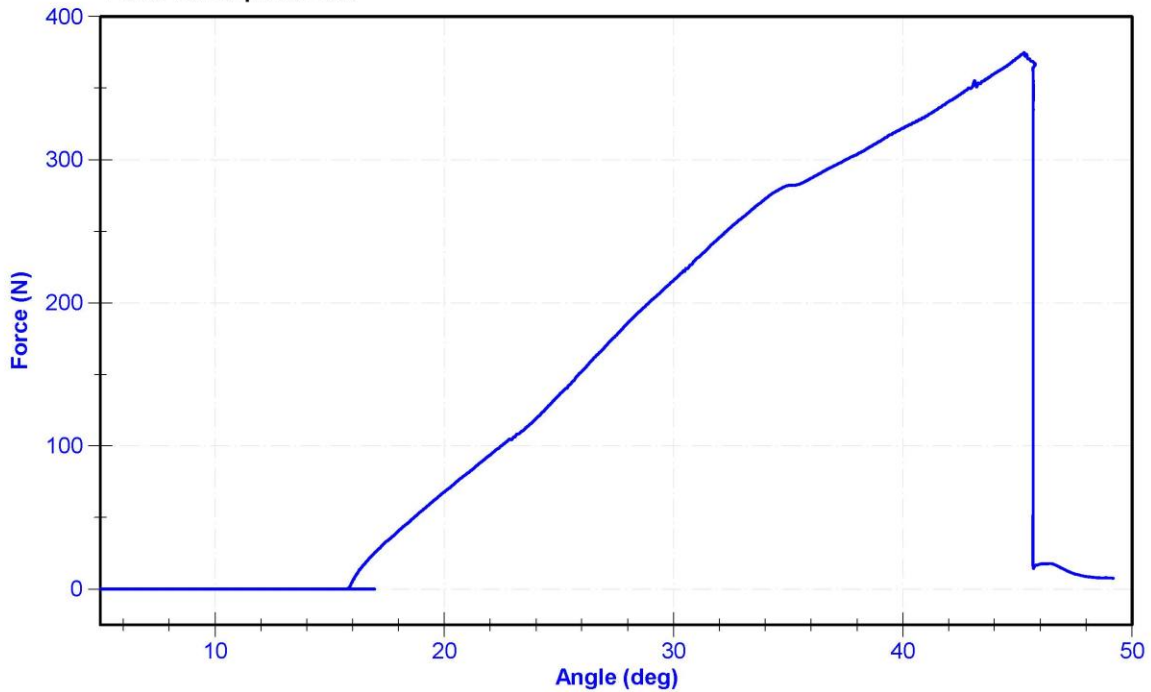


ATD Manufacturer	Denton	Test Technician	E. Helenbrook
ATD Serial Number	139	Laboratory Supervisor	K. Brogan



**Results**

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	18.9	25.6	°C	21.3	Pass
Humidity	10	70	%	32.2	Pass
Velocity	2.07	2.13	m/s	2.109	Pass
Resistive Force	3450	4060	N	3732.2	Pass

**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	MSI 64C-2000	A260568	1/29/2020	1/28/2021

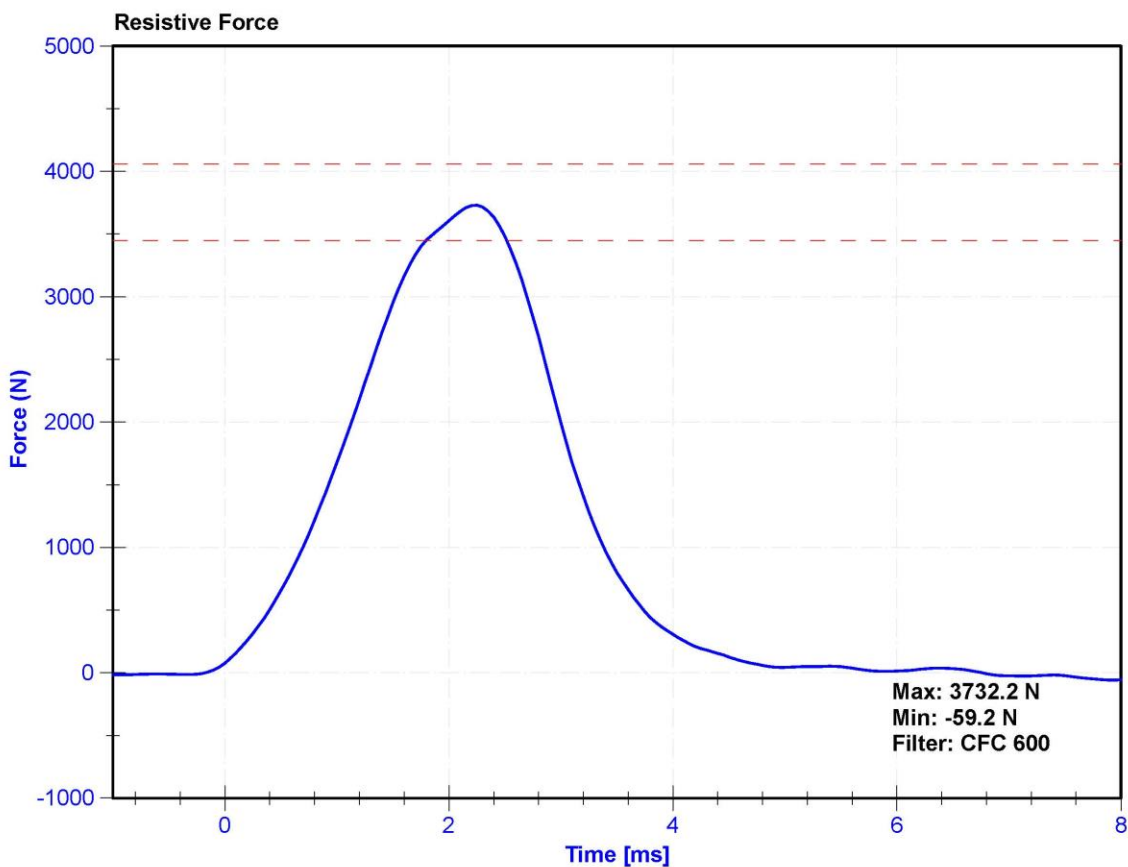

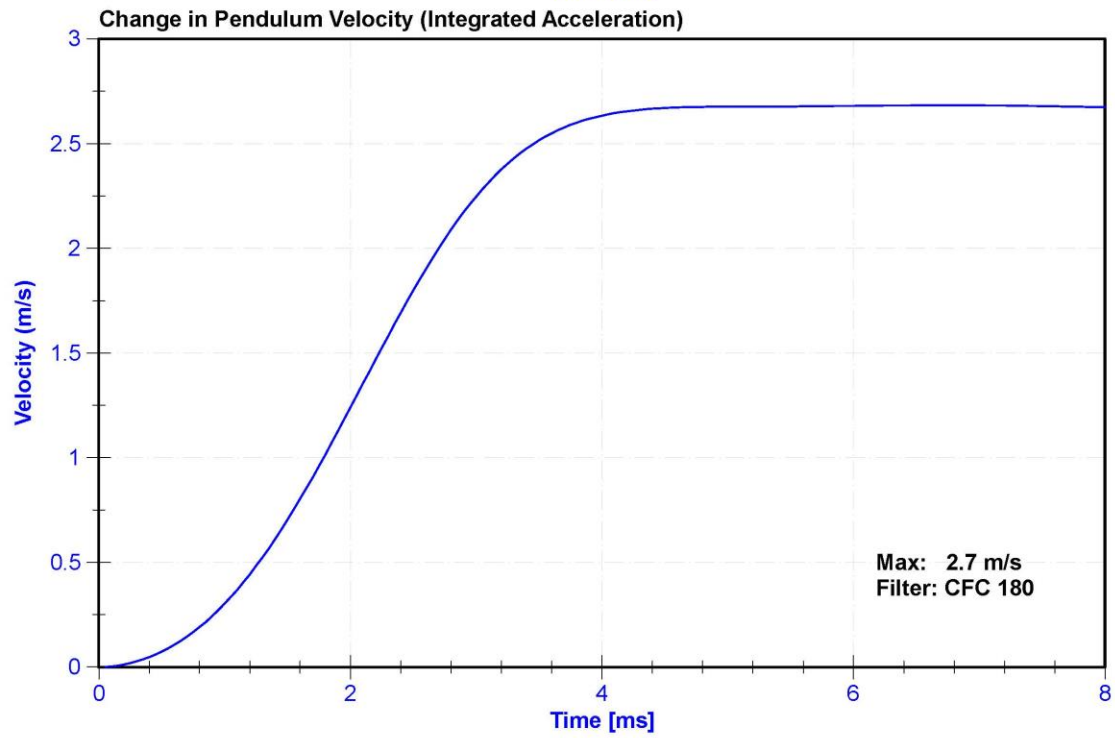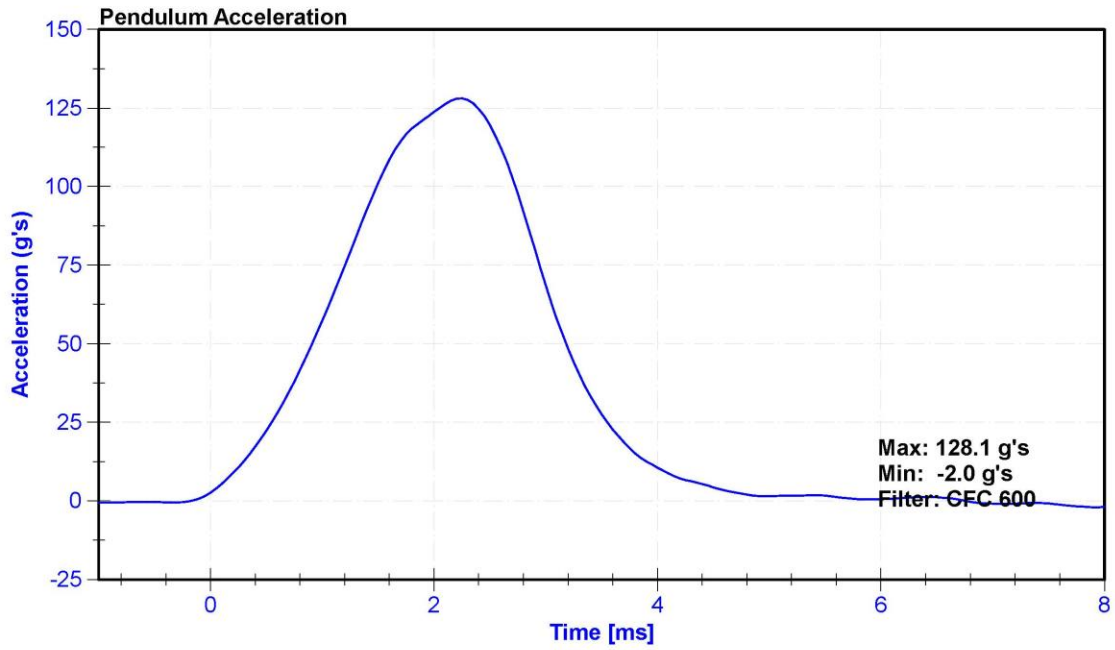


ATD Manufacturer	Denton	Test Technician	E. Helenbrook
ATD Serial Number	139	Laboratory Supervisor	K. Brogan



**Results**

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	18.9	25.6	°C	21.3	Pass
Humidity	10	70	%	32.3	Pass
Velocity	2.07	2.13	m/s	2.105	Pass
Resistive Force	3450	4060	N	3999.1	Pass

**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	MSI 64C-2000	A260568	1/29/2020	1/28/2021

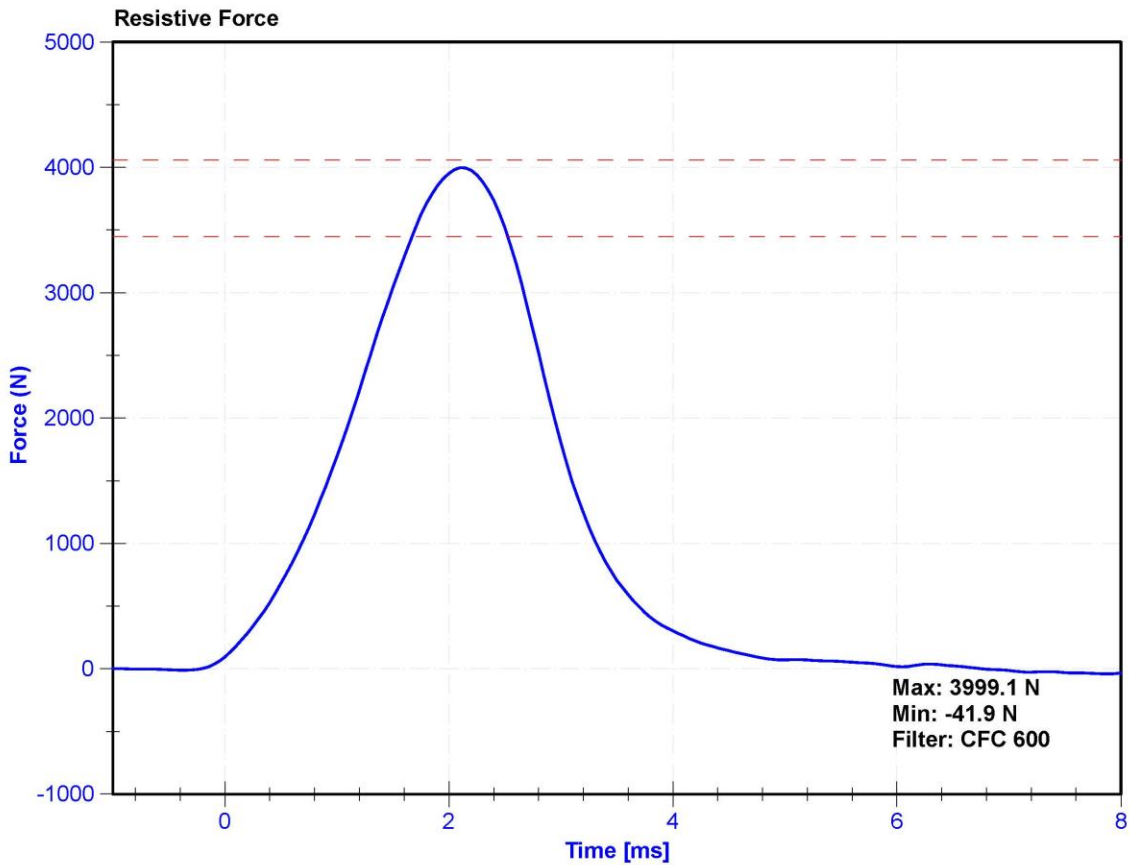

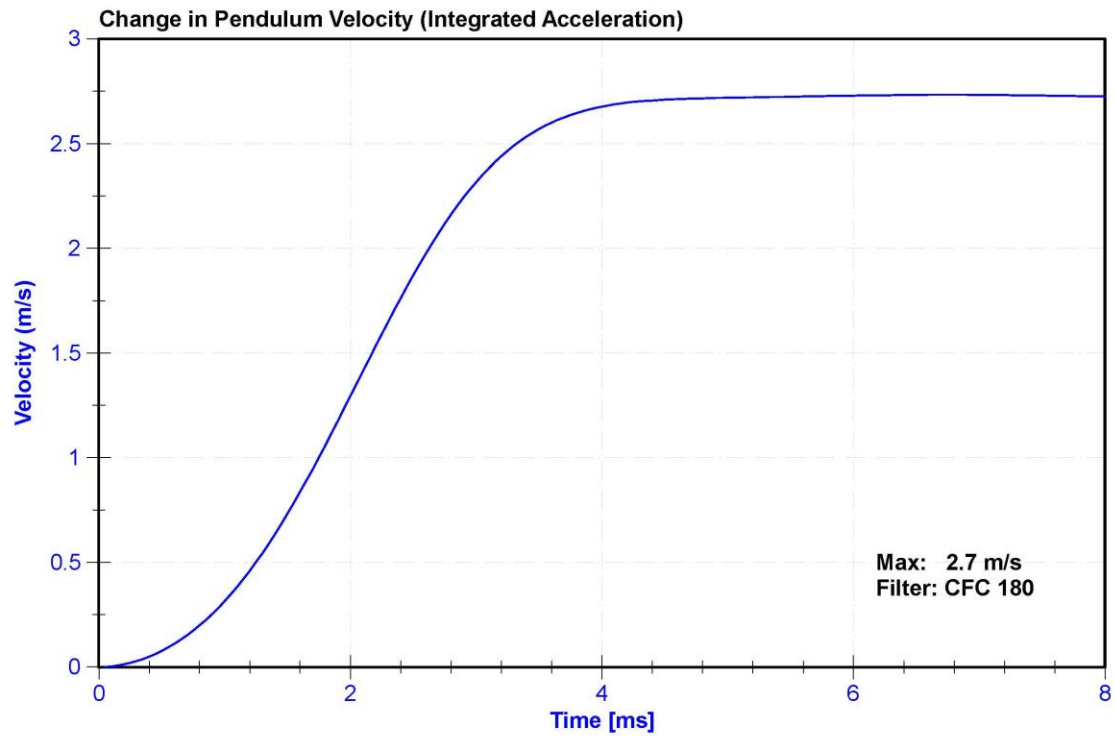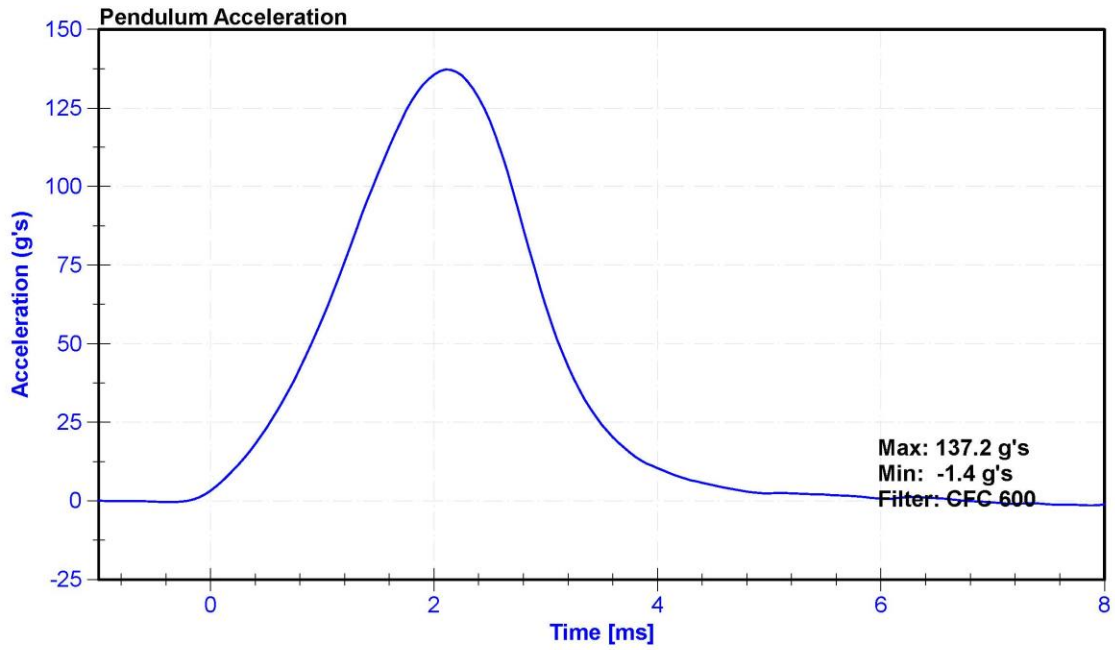

## APPENDIX D

### DUMMY CALIBRATION AND PERFORMANCE VERIFICATION DATA

**Table 1 – Driver Dummy Instrumentation**

Instrumentation		Axis/Location	Hybrid III 50 <sup>th</sup> S/N: 142		
			Serial Number	Manufacturer	Calibration Date
Head Accelerometers	Primary	X	P51681	ENDEVCO	2/10/2020
		Y	P64151	ENDEVCO	2/10/2020
		Z	P52114	ENDEVCO	2/10/2020
	Redundant	X	P58833	ENDEVCO	2/10/2020
		Y	P58905	ENDEVCO	2/10/2020
		Z	P63996	ENDEVCO	2/10/2020
Head Angular Rate Sensors		X	ARS-5941 GFE	DTS	7/8/2019
		Y	ARS-6014 GFE	DTS	7/8/2019
		Z	ARS-5990	DTS	7/8/2019
Upper Neck Load Cell		FX, Fy, Fz MX,MY, MZ	LC-280FxGFE	Denton	10/3/2019
Chest Accelerometers	Primary	X	AC-P51994	ENDEVCO	2/17/2020
		Y	AC-P51991	ENDEVCO	2/17/2020
		Z	AC-P49185	ENDEVCO	2/17/2020
	Redundant	X	AC-P51713	ENDEVCO	2/17/2020
		Y	AC-P68059	ENDEVCO	2/17/2020
		Z	AC-P78824	ENDEVCO	2/17/2020
Chest Potentiometer		X	DS-142	JDK	9/12/2019
Pelvis Accelerometer		X	AC-P58800	ENDEVCO	2/17/2020
		Y	AC-P52157	ENDEVCO	2/17/2020
		Z	AC-P52156	ENDEVCO	2/17/2020
Femur Load Cells - Left	Primary	Z	LC-115-1 Fz	Denton	10/3/2019
	Redundant	Z	LC-115-2 Fz	Denton	10/3/2019
Femur Load Cells - Right	Primary	Z	LC-DI4210FZ1	Denton	10/3/2019
	Redundant	Z	LC-DI4210FZ2	Denton	10/3/2019
Tibia Load Cells - Left	Upper	MX, MY, FZ	LC-404Fx	Denton	9/25/2019
	Lower	MX, MY, FZ	LC-396Fz	Denton	9/25/2019
Tibia Load Cells – Right	Upper	MX, MY, FZ	LC-364Fz	Denton	10/3/2019
	Lower	MX, MY, FZ	36440364 FZ	Denton	9/25/2019
Foot Accelerometers - Left	Rear	X	AC-P50084	ENDEVCO	2/17/2020
	Front	Z	AC-P58779	ENDEVCO	2/17/2020
Foot Accelerometers - Right	Rear	X	AC-P51872	ENDEVCO	2/17/2020
	Front	Z	AC-P58893	ENDEVCO	2/17/2020
Seat belt Load Cells	Lap		N/A	N/A	N/A
	Shoulder		LC-174	FTSS	5/4/2019

**Table 2 – Front Passenger Dummy Instrumentation**

Instrumentation		Axis/Location	Hybrid III 5 <sup>th</sup> S/N: 139		
			Serial Number	Manufacturer	Calibration Date
Head Accelerometers	Primary	X	AC-P51945	ENDEVCO	10/21/2019
		Y	AC-P51974	ENDEVCO	10/21/2019
		Z	AC-P51946	ENDEVCO	10/21/2019
	Redundant	X	AC-P49200	ENDEVCO	10/21/2019
		Y	AC-P51950	ENDEVCO	10/21/2019
		Z	AC-P49440	ENDEVCO	10/21/2019
Head Angular Rate Sensors		X	ARS-6731	DTS	7/8/2019
		Y	ARS-4718 GFE	DTS	7/8/2019
		Z	ARS-7589	DTS	7/8/2019
Upper Neck Load Cell		FX, Fy, Fz MX,MY, MZ	LC-1916Fx	Denton	10/3/2019
Chest Accelerometers	Primary	X	AC-P80234	ENDEVCO	11/25/2019
		Y	AC-P83437	ENDEVCO	11/25/2019
		Z	AC-P80255	ENDEVCO	11/25/2019
	Redundant	X	AC-P51730	ENDEVCO	10/11/2019
		Y	AC-P82759	ENDEVCO	11/25/2019
		Z	AC-P82750	ENDEVCO	11/25/2019
Chest Potentiometer		X	DS-288GFE	SERVO	10/23/2019
Pelvis Accelerometer		X	AC-P58880	ENDEVCO	10/21/2019
		Y	AC-P58871	ENDEVCO	10/21/2019
		Z	AC-P52155	ENDEVCO	10/21/2019
Femur Load Cells - Left	Primary	Z	LC-118Fz1	Denton	10/3/2019
	Redundant	Z	LC-118Fz2	Denton	10/3/2019
Femur Load Cells - Right	Primary	Z	LC-117Fz1	Denton	10/3/2019
	Redundant	Z	LC-117Fz2	Denton	10/3/2019
Tibia Load Cells - Left	Upper	MX, MY, FZ	36430362-FZ	Denton	10/3/2019
	Lower	MX, MY, FZ	36440674-FZ	Denton	10/3/2019
Tibia Load Cells – Right	Upper	MX, MY, FZ	36430486-FX	Denton 3643	10/3/2019
	Lower	MX, MY, FZ	36440495-FZ	Denton 3644JFL	10/3/2019
Foot Accelerometers - Left	Rear	X	AC-P80226	ENDEVCO	11/25/2019
	Front	Z	AC-P83423	ENDEVCO	11/25/2019
Foot Accelerometers - Right	Rear	X	AC-P51740	ENDEVCO	11/25/2019
	Front	Z	AC-P68061	ENDEVCO	11/21/2019
Seat belt Load Cells	Lap		N/A	N/A	N/A
	Shoulder		LC-DK1753	FTSS IF-964	5/4/2019

**Table 3 – Vehicle Instrumentation**

Instrumentation			Axis	Serial Number	Manufacturer	Calibration Date
Crossmember/Rear Seat Accelerometers	Left	Primary	X	AC-A262923	MSI	2/22/2020
			Z	AC-A281016	MSI	2/22/2020
		Redundant	X	AC-A280876	MSI	2/22/2020
	Right	Primary	X	AC-A255979	MSI	2/22/2020
			Z	AC-A280916	MSI	10/9/2019
		Redundant	X	AC-A255998	MSI	2/22/2020
Engine Accelerometers	Top		X	AC-A250358	MSI	2/21/2020
	Bottom		X	A284320	MSI	2/21/2020