

**NEW CAR ASSESSMENT PROGRAM  
CRASH IMMINENT BRAKING SYSTEM CONFIRMATION TEST  
NCAP-DRI-CIB-21-04**

**2021 Chrysler Pacifica Touring L S Appearance**

**DYNAMIC RESEARCH, INC.**

355 Van Ness Avenue, STE 200  
Torrance, California 90501



**20 April 2021**

**Final Report**

**Prepared Under Contract No. DTNH22-14-D-00333**

**U.S. DEPARTMENT OF TRANSPORTATION  
National Highway Traffic Safety Administration  
New Car Assessment Program  
1200 New Jersey Avenue, SE  
West Building, 4<sup>th</sup> Floor (NRM-110)  
Washington, DC 20590**

Prepared for the Department of Transportation, National Highway Traffic Safety Administration, under Contract No. DTNH22-14-D-00333.

This publication is distributed by the U.S. Department of Transportation, National Highway Traffic Safety Administration, in the interest of information exchange. The opinions, findings, and conclusions expressed in this publication are those of the author(s) and not necessarily those of the Department of Transportation or the National Highway Traffic Safety Administration. The United States Government assumes no liability for its contents or use thereof. If trade or manufacturer's names or products are mentioned, it is only because they are considered essential to the object of the publication and should not be construed as an endorsement. The United States Government does not endorse products of manufacturers.

Prepared By: J. Lenkeit

Program Manager

Date: 20 April 2021

J. Robel

Test Engineer

1. Report No. NCAP-DRI-CIB-21-04	2. Government Accession No.	3. Recipient's Catalog No.	
4. Title and Subtitle Final Report of Crash Imminent Braking System Confirmation Test of a 2021 Chrysler Pacifica Touring L S Appearance.		5. Report Date 20 April 2021	
		6. Performing Organization Code DRI	
7. Author(s) J. Lenkeit, Program Manager J. Robel, Test Engineer		8. Performing Organization Report No. DRI-TM-20-190	
9. Performing Organization Name and Address Dynamic Research, Inc. 355 Van Ness Ave, STE 200 Torrance, CA 90501		10. Work Unit No.	
		11. Contract or Grant No. DTNH22-14-D-00333	
12. Sponsoring Agency Name and Address U.S. Department of Transportation National Highway Traffic Safety Administration New Car Assessment Program 1200 New Jersey Avenue, SE, West Building, 4th Floor (NRM-110) Washington, DC 20590		13. Type of Report and Period Covered Final Test Report March - April 2021	
		14. Sponsoring Agency Code NRM-110	
15. Supplementary Notes			
16. Abstract These tests were conducted on the subject 2021 Chrysler Pacifica Touring L S Appearance in accordance with the specifications of the New Car Assessment program's most current Test Procedure in docket NHTSA-2015-0006-0025; CRASH IMMINENT BRAKE SYSTEM PERFORMANCE EVALUATION FOR THE NEW CAR ASSESSMENT PROGRAM, October 2015. The vehicle passed the requirements of the test for the stopped Principal Other Vehicle (POV) and for both Steel Trench Plate scenarios, but failed the requirements of the test for both slower moving POV scenarios and the decelerating POV scenario, resulting in an overall fail for the CIB test.			
17. Key Words Crash Imminent Braking, CIB, AEB, New Car Assessment Program, NCAP		18. Distribution Statement Copies of this report are available from the following: NHTSA Technical Reference Division National Highway Traffic Safety Administration 1200 New Jersey Avenue, SE Washington, DC 20590	
19. Security Classif. (of this report) Unclassified	20. Security Classif. (of this page) Unclassified	21. No. of Pages 110	22. Price

## TABLE OF CONTENTS

<u>SECTION</u>	<u>PAGE</u>
I. INTRODUCTION .....	1
II. DATA SHEETS.....	2
Data Sheet 1: Test Results Summary.....	3
Data Sheet 2: Vehicle Data .....	4
Data Sheet 3: Test Conditions.....	5
Data Sheet 4: Crash Imminent Braking System Operation.....	7
III. TEST PROCEDURES .....	11
A. Test Procedure Overview .....	11
B. General Information.....	16
C. Principal Other Vehicle .....	19
D. Automatic Braking System.....	20
E. Instrumentation.....	21
APPENDIX A Photographs .....	A-1
APPENDIX B Excerpts from Owner's Manual.....	B-1
APPENDIX C Run Log .....	C-1
APPENDIX D Time Histories.....	D-1

## Section I

### INTRODUCTION

Crash Imminent Braking (CIB) systems are a subset of Automatic Emergency Braking (AEB) systems. CIB systems are designed to avoid, or mitigate rear-end crashes, by automatically applying subject vehicle brakes when the system determines that, without intervention, a rear-end crash will occur. CIB systems typically work as an extension of Forward Collision Warning (FCW) systems, which alert the driver to the possibility of a collision unless driver action is taken. CIB systems employ sensors capable of detecting vehicles in the forward path. Current CIB technology typically involves RADAR, LIDAR, or vision-based (camera) sensors, and measurement of vehicle operating conditions such as speed, driver steering and brake application, etc. Algorithms in the system's Central Processing Unit (CPU) use this information to continuously monitor the likelihood of a rear-end crash and command a brake actuator to apply the brakes when necessary.

The method prescribed by the National Highway Traffic Safety Administration (NHTSA) to evaluate CIB performance on the test track<sup>1</sup> involves three rear-end type crash configurations and a "false positive" test. In the rear-end scenarios, a subject vehicle (SV) approaches a stopped, slower-moving, or decelerating principal other vehicle (POV) in the same lane of travel. For these tests, the POV is a strikeable object with the characteristics of a compact passenger car. The false positive scenarios are used to evaluate the propensity of a CIB system to inappropriately activate in a non-critical driving scenario that does not involve a forward vehicle or present a safety risk to the SV occupant(s).

The purpose of the testing reported herein was to objectively quantify the performance of a Crash Imminent Braking system installed on a 2021 Chrysler Pacifica Touring L S Appearance. This test is part of the New Car Assessment Program to assess Crash Imminent Braking Systems sponsored by the National Highway Traffic Safety Administration under Contract No. DTNH22-14-D-00333.

---

<sup>1</sup> NHTSA-2015-0006-0025; Crash Imminent Brake System Performance Evaluation for the New Car Assessment Program, October 2015.

Section II  
**DATA SHEETS**

**CRASH IMMINENT BRAKING**  
**DATA SHEET 1: TEST RESULTS SUMMARY**

(Page 1 of 1)

**2021 Chrysler Pacifica Touring L S Appearance**

---

VIN: 2C4RC1BG6MR50xxxx

Test Date: 3/23/2021 and 4/5/2021

Crash Imminent Braking System settings:

Forward Collision Warning: Warning + Active Braking

Forward Collision Sensitivity: Med

**Test 1 – Subject Vehicle Encounters  
Stopped Principal Other Vehicle**

SV 25 mph: Pass

**Test 2 – Subject Vehicle Encounters  
Slower Principal Other Vehicle**

SV 25 mph POV 10 mph: Fail

SV 45 mph POV 20 mph: Fail

**Test 3 – Subject Vehicle Encounters  
Decelerating Principal Other Vehicle**

SV 35 mph POV 35 mph: Fail

**Test 4 – Subject Vehicle Encounters  
Steel Trench Plate**

SV 25 mph: Pass

SV 45 mph: Pass

**Overall: Fail**

Notes:

**CRASH IMMINENT BRAKING**  
**DATA SHEET 2: VEHICLE DATA**

(Page 1 of 1)

**2021 Chrysler Pacifica Touring L S Appearance**

---

**TEST VEHICLE INFORMATION**

VIN: 2C4RC1BG6MR50xxxx

Body Style: Minivan

Color: Ceramic Gray

Date Received: 3/15/2021

Odometer Reading: 10 mi

**DATA FROM VEHICLE'S CERTIFICATON LABEL**

Vehicle manufactured by: FCA US LLC

Date of manufacture: 11-20

Vehicle Type: MPV

**DATA FROM TIRE PLACARD**

Tires size as stated on Tire Placard: Front: 235/60R18 103H

Rear: 235/60R18 103H

Recommended cold tire pressure: Front: 250 kPa (36 psi)

Rear: 250 kPa (36 psi)

**TIRES**

Tire manufacturer and model: Michelin Premier A/S Michelin Total Performance

Front tire designation: 235/60R18 103H

Rear tire designation: 235/60R18 103H

Front tire DOT prefix: B9XF 01DX

Rear tire DOT prefix: B9XF 01DX



**CRASH IMMINENT BRAKING**  
**DATA SHEET 3: TEST CONDITIONS**

(Page 1 of 2)

**2021 Chrysler Pacifica Touring L S Appearance**

---

**GENERAL INFORMATION**

Test date: 3/23/2021 and 4/5/2021

**AMBIENT CONDITIONS**

Air temperature: 10.0 C (50 F)

Wind speed: 2.1 m/s (4.6 mph)

X Windspeed  $\leq$  10 m/s (22 mph)

X Tests were not performed during periods of inclement weather. This includes, but is not limited to, rain, snow, hail, fog, smoke, or ash.

X Tests were conducted during daylight hours with good atmospheric visibility (defined as an absence of fog and the ability to see clearly for more than 5000 meters). The tests were not conducted with the vehicle oriented into the sun during very low sun angle conditions, where the sun is oriented 15 degrees or less from horizontal, and camera "washout" or system inoperability results.

**VEHICLE PREPARATION**

**Verify the following:**

All non-consumable fluids at 100% capacity: X

Fuel tank is full: X

Tire pressures are set to manufacturer's recommended cold tire pressure: X

Front: 250 kPa (36 psi)

Rear: 250 kPa (36 psi)

**CRASH IMMINENT BRAKING**  
**DATA SHEET 3: TEST CONDITIONS**

(Page 2 of 2)

**2021 Chrysler Pacifica Touring L S Appearance**

---

**WEIGHT**

Weight of vehicle as tested including driver and instrumentation

Left Front: 645.9 kg (1424 lb)

Right Front: 623.2 kg (1374 lb)

Left Rear: 489.9 kg (1080 lb)

Right Rear: 473.1 kg (1043 lb)

Total: 2232.1 kg (4921 lb)

**CRASH IMMINENT BRAKING**  
**DATA SHEET 4: CRASH IMMINENT BRAKING SYSTEM OPERATION**

(Page 1 of 4)

**2021 Chrysler Pacifica Touring L S Appearance**

---

Name of the CIB option, option package, etc.:

Full-Speed Forward-Collision Warning Plus: standard equipment

Type and location of sensors the system uses:

Camera: located in the top-center of the windshield

Radar: located behind the front vehicle fascia along the centerline of the vehicle

System setting used for test (if applicable):

Forward Collision Warning: Warning + Active Braking

Forward Collision Sensitivity: Med

What is the minimum vehicle speed at which the CIB system becomes active?

2 km/h (1 mph) (Per manufacturer supplied information)

What is the maximum vehicle speed at which the CIB system functions?

200 km/h (124 mph) (Per manufacturer supplied information)

Does the vehicle system require an initialization sequence/procedure?

Yes  
 No

If yes, please provide a full description.

Will the system deactivate due to repeated CIB activations, impacts, or near-misses?

Yes  
 No

If yes, please provide a full description.

In the event of 4 CIB events with braking within the same key cycle, the cluster will display the message "FCW NOT AVAILABLE AUTOBRAKE DISABLED" and CIB will not be available until the ignition is cycled (vehicle is stopped and restarted).

**CRASH IMMINENT BRAKING**

**DATA SHEET 4: CRASH IMMINENT BRAKING SYSTEM OPERATION**

(Page 2 of 4)

**2021 Chrysler Pacifica Touring L S Appearance**

---

How is the Forward Collision Warning system alert presented to the driver?  Warning light  
(Check all that apply)  Buzzer or auditory alarm  
 Vibration  
 Other See below

---

Describe the method by which the driver is alerted. For example, if the warning is a light, where is it located, its color, size, words, or symbol, does it flash on and off, etc. If it is a sound, describe if it is a constant beep or a repeated beep. If it is a vibration, describe where it is felt (e.g., pedals, steering wheel), the dominant frequency (and possibly magnitude), the type of warning (light, auditory, vibration, or combination), etc.

*In the event of a CIB or Forward Collision Warning event, a loud auditory warning will be provided to the driver before the initiation of automated braking. A series of three high-pitched loud beeps will be provided together with a message in the cluster indicating that the driver should brake. The text that will be displayed is: "Brake!" See Appendix A, Figure A15.*

*In some instances, for speeds above 62 km/h, a short duration brake "stab" is provided to the driver as a means of a haptic warning. This is done prior to initiation of CIB.*

Is there a way to deactivate the system?  Yes  
 No

**CRASH IMMINENT BRAKING**

**DATA SHEET 4: CRASH IMMINENT BRAKING SYSTEM OPERATION**

(Page 3 of 4)

**2021 Chrysler Pacifica Touring L S Appearance**

---

If yes, please provide a full description including the switch location and method of operation, any associated instrument panel indicator, etc.

A center mounted touchscreen display is used to interact with the vehicle system menus. The menu hierarchy is:

Vehicle

Safety & Driving Assistance

Automatic Emergency Braking

Forward Collision Warning

Choose from "Off", "Only Warning", or "Warning + Active Braking"

See Appendix A, Figure A14.

The FCW system state is kept in memory from one key cycle to the next. If the system is turned off, it will remain off when the vehicle is restarted.

Is the vehicle equipped with a control whose purpose is to adjust the range setting or otherwise influence the operation of CIB?  Yes  
 No

If yes, please provide a full description.

A center mounted touchscreen display is used to interact with the vehicle system menus. The menu hierarchy is:

Vehicle

Safety & Driving Assistance

Automatic Emergency Braking

Forward Collision Sensitivity

Choose from "Near", "Med", or "Far"

See Appendix A, Figure A14.

Are there other driving modes or conditions that render CIB inoperable or reduce its effectiveness?  Yes  
 No

## CRASH IMMINENT BRAKING

### DATA SHEET 4: CRASH IMMINENT BRAKING SYSTEM OPERATION

(Page 4 of 4)

#### 2021 Chrysler Pacifica Touring L S Appearance

---

If yes, please provide a full description.

Radar blindness. If the vehicle is moving and the radar sees no targets for a period of approximately 2 minutes, CIB will become unavailable. An auditory indication will be provided to the driver and the cluster will display the message "FCW Not Available Wipe Front Radar Sensor." This condition can be remedied by restarting the vehicle and letting the radar see stationary objects or moving vehicles.

Camera blindness. Camera blindness can generally be avoided by not attempting to drive for long intervals toward the sun when it is at a low elevation angle in the horizon. In the event that the camera becomes blinded a message stating "ACC/FCW Limited Functionality" will be displayed. In the event that the camera detects a situation of limited visibility because of the dirty windshield a message stating "Clean Front Windshield" will be displayed.

The FCW alerts may be triggered on objects other than vehicles such as guard rails or signposts based on the course prediction.

Avoid driving into the sun for long intervals of time while the sun is at a low elevation angle above the horizon. Also make sure that a significant amount of snow does not accumulate on the fascia in the area that covers the radar (vehicle centerline).

Notes:

## Section III

### TEST PROCEDURES

#### A. Test Procedure Overview

Four test scenarios were used, as follows:

Test 1. Subject Vehicle (SV) Encounters Stopped Principal Other Vehicle (POV)

Test 2. Subject Vehicle Encounters Slower Principal Other Vehicle

Test 3. Subject Vehicle Encounters Decelerating Principal Other Vehicle

Test 4. Subject Vehicle Encounters Steel Trench Plate

An overview of each of the test procedures follows.

#### 1. TEST 1 – SUBJECT VEHICLE ENCOUNTERS STOPPED PRINCIPAL OTHER VEHICLE ON A STRAIGHT ROAD

This test evaluates the ability of the CIB system to detect and respond to a stopped lead vehicle in the immediate forward path of the SV, as depicted in Figure 1.

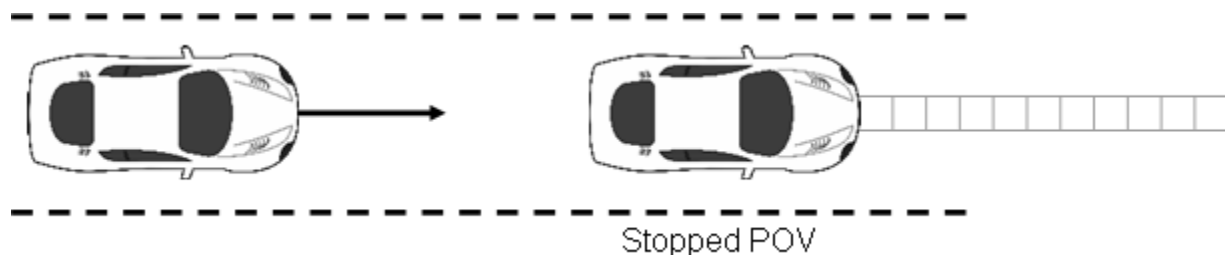


Figure 1. Depiction of Test 1

##### a. Procedure

The POV was parked in the center of a travel lane, with its longitudinal axis oriented parallel to the roadway edge and facing the same direction as the SV so that the SV approached the rear of the POV.

The SV ignition was cycled prior to each test run. The SV was driven at a nominal speed of 25 mph (40.2 km/h) in the center of the lane of travel, toward the parked POV. The SV throttle pedal was released within 500 ms after  $t_{FCW}$ , i.e. within 500 ms of the FCW alert. The test concluded when either:

- The SV came into contact with the POV or
- The SV came to a stop before making contact with the POV.

In addition to the general test validity criteria described below, for an individual test trial to be valid, the following was required throughout the test:

- The SV speed could not deviate from the nominal speed by more than 1.0 mph (1.6 km/h) during an interval defined by a Time to Collision (TTC) = 5.1 seconds to  $t_{FCW}$ . For this test, TTC = 5.1 seconds is taken to occur at an SV-to-POV distance of 187 ft (57 m).

b. Criteria

In order to pass the test, the magnitude of the SV speed reduction attributable to CIB intervention must have been  $\geq 9.8$  mph (15.8 km/h) for at least five of seven valid test trials.

The magnitude of the SV speed reduction attributable to CIB intervention was calculated in one of two ways, depending on whether a test trial concluded with the SV colliding with the POV.

- If SV-to-POV contact occurred during a test trial, the CIB speed reduction was calculated by subtracting the SV speed at the time of SV-to-POV contact (i.e., when longitudinal range became zero) from the average SV speed calculated from  $t_{FCW}-100$  ms to  $t_{FCW}$ .
- If SV-to-POV contact did not occur during a test trial (i.e., CIB intervention prevented the crash), the SV speed at a time of SV-to-POV contact was taken to be zero. The speed reduction is therefore equal to the SV speed at  $t_{FCW}$ .

2. TEST 2 – SUBJECT VEHICLE ENCOUNTERS SLOWER PRINCIPAL OTHER VEHICLE

- This test evaluates the ability of the CIB system to detect and respond to a slower-moving lead vehicle traveling at a constant speed in the immediate forward path of the SV, as depicted in Figure 2.

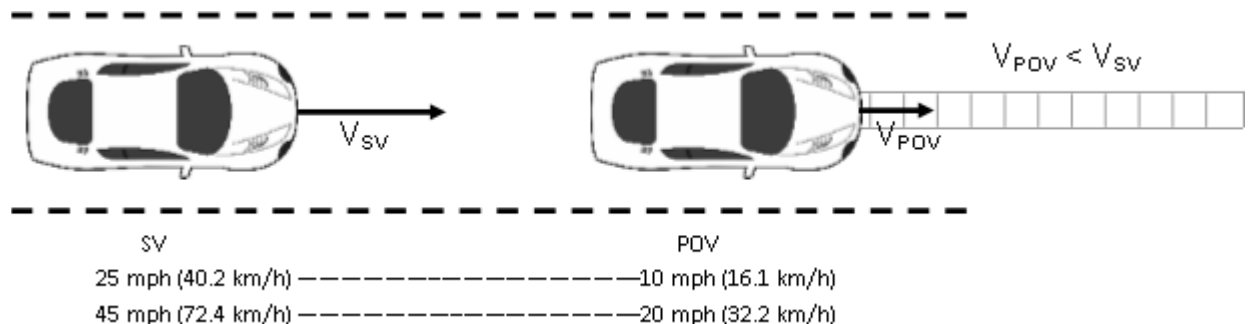


Figure 2. Depiction of Test 2



#### a. Procedure

The SV ignition was cycled prior to each test run. The tests were conducted two ways. In the first, the POV was driven at a constant 10.0 mph (16.1 km/h) in the center of the lane of travel while the SV was driven at 25.0 mph (40.2 km/h), in the center lane of travel, toward the slower-moving POV. In the second, the POV was driven at a constant 20.0 mph (32.2 km/h) in the center of the lane of travel while the SV was driven at 45.0 mph (72.4 km/h), in the center lane of travel, toward the slower-moving POV. In both cases, the SV throttle pedal was released within 500 ms after  $t_{FCW}$ , i.e. within 500 ms of the FCW alert. The test concluded when either:

- The SV came into contact with the POV or
- 1 second after the speed of the SV becomes less than or equal to that of the POV.

The SV driver then braked to a stop.

In addition to the general test validity criteria described below, for an individual test trial to be valid, the following was required throughout the test:

- The lateral distance between the centerline of the POV and the center of the travel lane could not deviate more than  $\pm 1$  ft (0.3 m) during the validity period.
- The lateral distance between the centerline of the SV and the center of the travel lane could not deviate more than  $\pm 1$  ft (0.3 m) during the validity period.
- The SV speed could not deviate more than  $\pm 1.0$  mph ( $\pm 1.6$  km/h) during an interval defined by  $TTC = 5.0$  seconds to  $t_{FCW}$ .
- The POV speed could not deviate more than  $\pm 1.0$  mph ( $\pm 1.6$  km/h) during the validity period.

#### b. Criteria

For the test series in which the initial SV speed was 25 mph, the condition for passing was that there be no SV-to-POV impact for at least five of the seven valid test trials.

In order to pass the test series for which the initial speed of the SV was 45 mph, the magnitude of the SV speed reduction attributable to CIB intervention must have been  $\geq 9.8$  mph (15.8 km/h) for at least five of seven valid test trials. The magnitude of the SV speed reduction attributable to CIB intervention was calculated in one of two ways, depending on whether a test trial concluded with the SV colliding with the POV.

- If SV-to-POV contact occurred during a test trial, the CIB speed reduction was calculated by subtracting the SV speed at the time of SV-to-POV contact (i.e., when longitudinal range became zero) from the average SV speed calculated from  $t_{FCW}-100$  ms to  $t_{FCW}$ .
- If SV-to-POV contact did not occur during a test trial (i.e., CIB intervention

prevented the crash), the CIB speed reduction was calculated by subtracting the SV speed at the minimum longitudinal SV-to-POV range during the validity period from the SV speed at  $t_{FCW}$ .

### 3. TEST 3 – SUBJECT VEHICLE ENCOUNTERS DECELERATING PRINCIPAL OTHER VEHICLE

This test evaluates the ability of the CIB system to detect and respond to a lead vehicle slowing with a constant deceleration in the immediate forward path of the SV, as depicted in Figure 3.

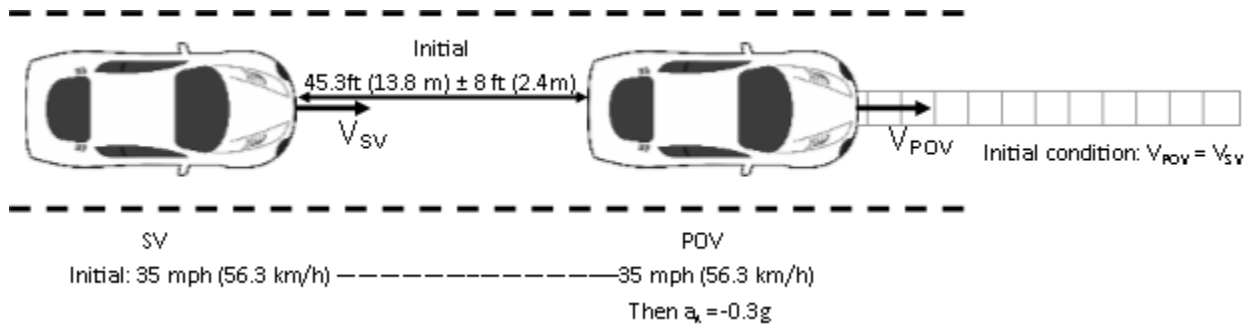


Figure 3. Depiction of Test 3

#### a. Procedure

The SV ignition was cycled prior to each test run. For this test scenario, both the POV and SV were driven at a constant 35.0 mph (56.3 km/h) in the center of the lane, with a headway of 45.3 ft (13.8 m)  $\pm$  8 ft (2.4 m). Once these conditions were met, the POV tow vehicle brakes were applied to achieve 0.3  $\pm$  0.03 g of deceleration. The test concluded when either:

- The SV came into contact with the POV or
- For the decelerating POV, 1 second after minimal longitudinal SV-to-POV distance occurred or
- For the POV decelerating to stop case, 1 second after the velocity of the SV became less than or equal to that of the POV.

The SV driver then braked to a stop.

In addition to the general test validity criteria described below, for an individual test trial to be valid, the following was required throughout the test:

- The lateral distance between the centerline of the POV and the center of the travel lane could not deviate more than  $\pm 1$  ft (0.3 m) during the validity period.
- The lateral distance between the centerline of the SV and the center of the travel lane could not deviate more than  $\pm 1$  ft (0.3 m) during the validity period.

- The headway between the SV and POV must have been constant from the onset of the applicable validity period to the onset of POV braking.
- The SV and POV speed could not deviate more than  $\pm 1.0$  mph (1.6 km/h) during an interval defined by the onset of the validity period to the onset of POV braking.
- The SV- POV headway distance could not deviate more than  $\pm 8$  ft (2.4 m) during an interval defined by the onset of the validity period to the onset of POV braking.
- The average POV deceleration could not deviate by more than  $\pm 0.03$  g from the nominal 0.3 g deceleration during the interval beginning at 1.5 seconds after the onset of POV braking and ending either 250 ms prior to the POV coming to a stop or the SV coming into contact with the POV.

#### b. Criteria

In order to pass the decelerating POV test series, the magnitude of the SV speed reduction attributable to CIB intervention must have been  $\geq 10.5$  mph (16.9 km/h) for at least five of seven valid test trials. The magnitude of the SV speed reduction attributable to CIB intervention was calculated in one of two ways, depending on whether a test trial concluded with the SV colliding with the POV.

- If SV-to-POV contact occurred during a test trial, the CIB speed reduction was calculated by subtracting the SV speed at the time of SV-to-POV contact (i.e., when longitudinal range becomes zero) from the average SV speed calculated from  $t_{FCW} - 100$  ms to  $t_{FCW}$ .
- If SV-to-POV contact did not occur during a test trial (i.e., CIB intervention prevents the crash), the CIB speed reduction was calculated by subtracting the SV speed at the minimum longitudinal SV-to-POV range during the applicable validity period from the SV speed at  $t_{FCW}$ .

#### 4. TEST 4 – FALSE POSITIVE SUPPRESSION

The false positive suppression test series evaluates the ability of a CIB system to differentiate a steel trench plate (STP) from an object presenting a genuine safety risk to the SV. Although the STP is large and metallic, it is designed to be driven over without risk of injury to the driver or damage to the SV. Therefore, in this scenario, the automatic braking available from CIB is not necessary and should be suppressed. The test condition is nearly equivalent to that previously defined for Test 1, the stopped POV condition, but with an STP in the SV forward path in lieu of a POV.

##### a. Procedure

This test was conducted at two speeds, 25 mph (40.2 km/h) and 45 mph (72.4 km/h). The SV was driven directly towards, and over, the STP, which was positioned in the center of a travel lane, with its longest sides parallel to the road edge.

In addition to the general test validity criteria described below, for an individual test trial to be valid, the following was required throughout the test:

- The SV speed could not deviate from the nominal speed by more than 1.0 mph (1.6 km/h) during an interval defined by a Time to Collision (TTC) = 5.1 seconds to  $t_{FCW}$  where:
  - For SV test speed of 25 mph, TTC = 5.1 seconds is taken to occur at an SV-to-STP distance of 187 ft (57 m).
  - For SV test speed of 45 mph, TTC = 5.1 seconds is taken to occur at an SV-to-STP distance of 337 ft (106 m).
- If the SV did not present an FCW alert before the end of the validity period, SV speed could not deviate more than  $\pm 1.0$  mph ( $\pm 1.6$  km/h) from TTC = 5.1 s to the end of the validity period.

If an FCW alert was presented, the driver released the throttle pedal within 500 ms of the alert. If no alert was presented, the driver did not release the throttle pedal until the end of the validity period. The SV driver then braked to a stop.

#### b. Criteria

In order to pass the False Positive test series, the magnitude of the SV deceleration reduction attributable to CIB intervention must have been  $\leq 0.50$  g for at least five of seven valid test trials.

## B. General Information

### 1. $T_{FCW}$

The time at which the Forward Collision Warning (FCW) activation flag indicates that the system has issued an alert to the SV driver is designated as  $t_{FCW}$ . FCW alerts are typically either visual, haptic or auditory, and the onset of the alert was determined by post-processing the test data.

For systems that implement auditory or haptic alerts, part of the pre-test instrumentation verification process was to determine the tonal frequency of the auditory warning or the vibration frequency of the tactile warning through use of the PSD (Power Spectral Density) function in Matlab. This was accomplished in order to identify the center frequency around which a band-pass filter was applied to subsequent auditory or tactile warning data so that the beginning of such warnings can be programmatically determined. The band-pass filter used for these warning signal types was a phaseless, forward-reverse pass, elliptical (Cauer) digital filter, with filter parameters as listed in Table 1.

**Table 1. Auditory and Tactile Warning Filter Parameters**

<b>Warning Type</b>	<b>Filter Order</b>	<b>Peak-to-Peak Ripple</b>	<b>Minimum Stop Band Attenuation</b>	<b>Passband Frequency Range</b>
Auditory	5 <sup>th</sup>	3 dB	60 dB	Identified Center Frequency $\pm$ 5%
Tactile	5 <sup>th</sup>	3 dB	60 dB	Identified Center Frequency $\pm$ 20%

## 2. GENERAL VALIDITY CRITERIA

In addition to any validity criteria described above for the individual test scenarios, for an individual trial to be valid, it must have met the following criteria throughout the test:

- The SV driver seatbelt was latched.
- If any load had been placed on the SV front passenger seat (e.g., for instrumentation), the vehicle's front passenger seatbelt was latched.
- The SV was driven at the nominal speed in the center of the travel lane, toward the POV or STP.
- The driver used the least amount of steering input necessary to maintain SV position in the center of the travel lane during the validity period; use of abrupt steering inputs or corrections was avoided.
- The yaw rate of the SV did not exceed  $\pm 1.0$  deg/s from the onset of the validity period to the instant SV deceleration exceeded 0.25 g.
- The SV driver did not apply any force to the brake pedal during the applicable validity period.
- The lateral distance between the centerline of the SV and the centerline of the POV or STP did not deviate more than  $\pm 1$  ft (0.3 m) during the applicable validity period.

### 3. VALIDITY PERIOD

The valid test interval began:

Test 1: When the SV-to-POV TTC = 5.1 seconds

Test 2: When the SV-to-POV TTC = 5.0 seconds

Test 3: 3 seconds before the onset of POV braking

Test 4: When the SV-to-STP TTC = 5.1 seconds

The valid test interval ended:

Test 1: When either of the following occurred:

- The SV came into contact with the POV (SV-to-POV contact was assessed by using GPS-based range data or by measurement of direct contact sensor output); or
- The SV came to a stop before making contact with the POV.

Tests 2 and 3: When either of the following occurred:

- The SV came into contact with the POV; or
- 1 second after the velocity of the SV became less than or equal to that of the POV.
- 1 second after minimal longitudinal SV-to-POV distance occurred.

Test 4: At the instant the front-most part of SV reached a vertical plane defined by the leading edge of the STP first encountered by the SV (i.e., just before it was driven onto the STP).

### 4. STATIC INSTRUMENTATION CALIBRATION

To assist in resolving uncertain test data, static calibration data was collected prior to each of the test series.

For Tests 1, 2, and 3, the SV, POV, POV moving platform, and tow vehicle were centered in the same travel lane with the same orientation (i.e., facing the same direction). For Test 4, the SV and STP were centered in the same travel lane.

For Tests 1, 2, and 3, the SV was positioned such that it just contacted a vertical plane that defines the rearmost location of the POV. For Test 4, the front-most location of the SV was positioned such that it just reached a vertical plane defined by the leading edge of the STP first encountered by the SV (i.e., just before it is driven onto the STP). This is the “zero position.”

The zero position was documented prior to, and immediately after, conduct of each test series.

If the zero position reported by the data acquisition system was found to differ by more than  $\pm 2$  in ( $\pm 5$  cm) from that measured during collection of the pre-test static calibration data file, the pre-test longitudinal offset was adjusted to output zero and another pre-test static calibration data file was collected. If the zero position reported by the data acquisition system was found to differ by more than  $\pm 2$  in ( $\pm 5$  cm) from that measured during collection of the post-test static calibration data file, the test trials performed between collection of that post-test static calibration data file and the last valid pre-test static calibration data file were repeated.

Static data files were collected prior to, and immediately after, conducting each of the test series. The pre-test static files were reviewed prior to test conduct to confirm that all data channels were operational and were properly configured.

## 5. NUMBER OF TRIALS

A target total of seven (7) valid trials were performed for each scenario. In cases where the test driver performed more than seven trials, the first seven trials satisfying all test tolerances were used to assess the SV performance.

## 6. TRANSMISSION

All trials were performed with SV automatic transmissions in “Drive” or with manual transmissions in the highest gear capable of sustaining the desired test speed. Manual transmission clutches remained engaged during all maneuvers. The brake lights of the POV were not illuminated.

### **C. Principal Other Vehicle**

CIB testing requires a POV that realistically represents typical vehicles, does not suffer damage or cause damage to a test vehicle in the event of collision, and can be accurately positioned and moved during the tests. The tests reported herein made use of the NHTSA developed Strikeable Surrogate Vehicle (SSV).

This SSV system was designed specifically for common rear-end crash scenarios which AEB systems address. The key components of the SSV system are:

- A POV shell which is a visually and dimensionally accurate representation of a passenger car.
- A slider and load frame assembly to which the shell is attached.
- A two-rail track on which the slider operates.
- A road-based lateral restraint track.
- A tow vehicle.

The key requirements of the POV element are to:

- Provide an accurate representation of a real vehicle to CIB sensors, including cameras and radar.
- Be resistant to damage and inflict little or no damage to the SV as a result of repeated SV-to-POV impacts.

The key requirements of the POV delivery system are to:

- Accurately control the nominal POV speed up to 35 mph (56 km/h).
- Accurately control the lateral position of the POV within the travel lane.
- Allow the POV to move away from the SV after an impact occurs.

Operationally, the POV shell is attached to the slider and load frame which includes rollers that allows the entire assembly to move longitudinally along the guide rail. The guide rail is coupled to a tow vehicle and guided by the lateral restraint track secured to the test track surface. The rail includes a provision for restraining the shell and roller assembly in the ward direction. In operation, the shell and roller assembly engage the rail assembly through detents to prevent relative motion during run-up to test speeds and deceleration of the tow vehicle. The combination of rearward stops and forward motion detents allows the test conditions, such as relative SV-to-POV headway distance, speed, etc., to be achieved and adjusted as needed in the preliminary part of a test. If during the test, the SV strikes the rear of the POV shell, the detents are overcome and the entire shell/roller assembly moves forward in a two-stage manner along the rail and away from the SV. The forward end of the rail has a cushioned stop to restrain forward motion of the shell/roller assembly. After impacting the SSV, the SV driver uses the steering wheel to maintain SV position in the center of the travel lane, thereby straddling the two-rail track. The SV driver must manually apply the SV brakes after impact. The SSV system is shown in Figures A6 through A8 and a detailed description can be found in the NHTSA report: NHTSA'S STRIKEABLE SURROGATE VEHICLE PRELIMINARY DESIGN+OVERVIEW, May 2013.

#### **D. Automatic Braking System**

The POV was equipped with an automatic braking system, which was used in Test 3. The braking system consisted of the following components:

- Electronically controlled linear actuator, mounted on the seat rail and attached to the brake pedal. The actuator can be programmed for control of stroke and rate.
- PC module programmed for control of the stroke and rate of the linear actuator.
- Switch to activate actuator.

In some cases, the SV is also equipped with an automatic braking system (E-brake) for the purpose of slowing the SV before impact with the SSV in cases where the SV is



likely to fail a test. The system fires when TTC is below 0.7 sec. It is typically enabled when an SV has already impacted the SSV one or two times.

### **E. Instrumentation**

Table 2 lists the sensors, signal conditioning, and data acquisition equipment used for these tests.

**Table 2. Test Instrumentation and Equipment**

Type	Output	Range	Accuracy, Other Primary Specs	Mfr, Model	Serial Number	Calibration Dates Last Due
Tire Pressure Gauge	Vehicle Tire Pressure	0-100 psi 0-690 kPa	< 1% error between 20 and 100 psi	Omega DPG8001	17042707002	By: DRI Date: 8/18/2020 Due: 8/18/2021
Platform Scales	Vehicle Total, Wheel, and Axle Load	2200 lb/platform	0.1% of reading	Intercomp SW wireless	0410MN20001	By: DRI Date: 2/10/2021 Due: 2/10/2022
Linear (string) encoder	Throttle pedal travel	10 in	0.1 in	UniMeasure LX-EP	50060726	By: DRI Date: 6/19/2020 Due: 6/19/2021
Differential Global Positioning System	Position, Velocity	Latitude: $\pm 90$ deg Longitude: $\pm 180$ deg Altitude: 0-18 km Velocity: 0-1000 knots	Horizontal Position: $\pm 1$ cm Vertical Position: $\pm 2$ cm Velocity: 0.05 km/h	Trimble GPS Receiver, 5700 (base station and in-vehicle)	00440100989	N/A
Multi-Axis Inertial Sensing System	Position; Longitudinal, Lateral, and Vertical Accels; Lateral, Longitudinal and Vertical Velocities; Roll, Pitch, Yaw Rates; Roll, Pitch, Yaw Angles	Accels $\pm 10g$ , Angular Rate $\pm 100$ deg/s, Angle $>45$ deg, Velocity $>200$ km/h	Accels .01g, Angular Rate 0.05 deg/s, Angle 0.05 deg, Velocity 0.1 km/h	Oxford Inertial +		By: Oxford Technical Solutions
					2258	Date: 5/3/2019 Due: 5/3/2021
					2182	Date: 9/16/2019 Due: 9/16/2021

**Table 2. Test Instrumentation and Equipment (continued)**

Type	Output	Range	Accuracy, Other Primary Specs	Mfr, Model	Serial Number	Calibration Dates Last Due
Real-Time Calculation of Position and Velocity Relative to Lane Markings (LDW) and POV (FCW)	Distance and Velocity to lane markings (LDW) and POV (FCW)	Lateral Lane Dist: ±30 m Lateral Lane Velocity: ±20 m/sec Longitudinal Range to POV: ±200 m Longitudinal Range Rate: ±50 m/sec	Lateral Distance to Lane Marking: ±2 cm Lateral Velocity to Lane Marking: ±0.02m/sec Longitudinal Range: ±3 cm Longitudinal Range Rate: ±0.02 m/sec	Oxford Technical Solutions (OXTS), RT-Range	97	N/A
Microphone	Sound (to measure time at alert)	Frequency Response: 80 Hz – 20 kHz	Signal-to-noise: 64 dB, 1 kHz at 1 Pa	Audio-Technica AT899	N/A	N/A
Light Sensor	Light intensity (to measure time at alert)	Spectral Bandwidth: 440-800 nm	Rise time < 10 msec	DRI designed and developed Light Sensor	N/A	N/A
Accelerometer	Acceleration (to measure time at alert)	±5g	≤ 3% of full range	Silicon Designs, 2210-005	N/A	N/A
Coordinate Measurement Machine	Inertial Sensing System Coordinates	0-8 ft 0-2.4 m	±.0020 in. ±.051 mm (Single point articulation accuracy)	Faro Arm, Fusion	UO8-05-08-06636	By: DRI Date: 1/6/2021 Due: 1/6/2022
Type	Description			Mfr, Model	Serial Number	
Data Acquisition System	Data acquisition is achieved using a dSPACE MicroAutoBox II. Data from the Oxford IMU, including Longitudinal, Lateral, and Vertical Acceleration, Roll, Yaw, and Pitch Rate, Forward and Lateral Velocity, Roll and Pitch Angle are sent over Ethernet to the MicroAutoBox. The Oxford IMUs are calibrated per the manufacturer's recommended schedule (listed above).			dSPACE Micro-Autobox II 1401/1513		
				Base Board	549068	
				I/O Board	588523	

## APPENDIX A

### Photographs

## LIST OF FIGURES

	Page
Figure A1. Front View of Subject Vehicle .....	A-3
Figure A2. Rear View of Subject Vehicle.....	A-4
Figure A3. Window Sticker (Monroney Label) .....	A-5
Figure A4. Vehicle Certification Label .....	A-6
Figure A5. Tire Placard .....	A-7
Figure A6. Rear View of Principal Other Vehicle (SSV) .....	A-8
Figure A7. Load Frame/Slider of SSV .....	A-9
Figure A8. Two-Rail Track and Road-Based Lateral Restraint Track.....	A-10
Figure A9. Steel Trench Plate .....	A-11
Figure A10. DGPS, Inertial Measurement Unit, and MicroAutoBox Installed in Subject Vehicle .....	A-12
Figure A11. Sensors for Detecting Auditory and Visual Alerts.....	A-13
Figure A12. Computer Installed in Subject Vehicle .....	A-14
Figure A13. Brake Actuator Installed in POV System.....	A-15
Figure A14. AEB Setup Menus.....	A-16
Figure A15. Visual Alert.....	A-17



Figure A1. Front View of Subject Vehicle



Figure A2. Rear View of Subject Vehicle



# 2021 PACIFICA TOURING L S APPEARANCE

IMPORTED FROM DETROIT\*

THIS VEHICLE IS MANUFACTURED TO MEET SPECIFIC UNITED STATES REQUIREMENTS. THIS VEHICLE IS NOT MANUFACTURED FOR SALE OR REGISTRATION OUTSIDE OF THE UNITED STATES.

MANUFACTURER'S SUGGESTED RETAIL PRICE OF THIS MODEL INCLUDING DEALER PREPARATION

Base Price: **\$38,145**

**CHRYSLER PACIFICA TOURING L**  
Exterior Color: Ceramic Gray Clear-Coat Exterior Paint  
Interior Color: Black / Black / Black Interior Colors  
Interior: McKinley Leather Perforated Bucket Seats w/ S Logo  
Engine: 3.6L V6 24V VVT Engine with ESS  
Transmission: 9-Speed Automatic Transmission

**STANDARD EQUIPMENT (UNLESS REPLACED BY OPTIONAL EQUIPMENT)**  
**FUNCTIONAL/SAFETY FEATURES**  
Adaptive Cruise Control with Stop and Go  
Blind-Spot and Rear Cross-Path Detection  
ParkSense® Rear Park-Assist with Stop  
Lane-Departure Warning Plus  
Full-Speed Forward-Collision Warning Plus  
Pedestrian Emergency Braking  
Advanced Brake-Assist  
Rain-Sensitive Windshield Wipers  
ParkView® Rear Back-Up Camera  
Advanced Multistage Front Air Bags  
Driver Inflatable Knee-Bolster Air Bag  
Supplemental Side-Curtain All-Rows Air Bags  
Supplemental Front Seat-Mounted Side Air Bags  
LATCH-Ready Child-Seat Anchor System  
Electronic Stability Control  
Tire Service Kit  
Remote Start System  
Sentry Key® Theft Deterrent System  
Remote Proximity for All Doors  
Push-Button Start

**INTERIOR FEATURES**  
2nd and 3rd-Row Stow 'n Go® Seats with Easy Tilt  
Heated Front Seats  
Heated Steering Wheel  
8-Way Power Adjustable Driver Seat  
Driver Seat Auto Advance 'n Return  
Driver-Seat Memory  
Floor Console with Covered Storage

**OPTIONAL EQUIPMENT (May Replace Standard Equipment)**  
**Customer Preferred Package 27L** \$795  
S Appearance Package  
235/60R18 BSW All-Season Self-Sealing Tires  
Black Stow 'n Place® Roof Rack  
Gloss-Black Grille-Surround  
"S" Badge  
Anodized Ink Badging  
Premium Rear Fascia with Black Accents  
Black Day Light Opening Moldings  
McKinley Leather Perforated Bucket Seats w/ S Logo  
Piano Black Interior Accents  
Anodized Ice Cave Accents  
18" X 7.5" Foreshadow Polished Aluminum Wheels \$2,995  
Uconnect® Theater Family Group  
FamCam™ Interior Camera  
Stow 'n Vac® Integrated Vacuum  
Heated Second-Row Seats  
Blu-Ray/DVD Player/ with USB Port  
Seatback Video Screens

Media Hubs - HDMI/USB/Headphone Ports  
Video USB Port  
115-Volt Auxiliary Power-Outlet  
Video Remote Controls  
Wireless Headphones  
Power-Front and Rear Windows with 1-Touch Up & Down  
Keyless  
Premium and Safety Sphere Group \$1,995  
360 Surround-View Camera System  
13 Alpine® Speakers  
506-Watt Amplifier  
Uconnect® 5 Navigation with 10.1-Inch Display  
SiriusXM Guardian™ Connected Service w/Trial Period  
SiriusXM® with 360L  
USB Charge Port - 3rd Row  
8-Way Power Adjustable Front Passenger Seat  
Front Passenger Seat Auto Advance 'n Return  
Integrated Voice Command with Bluetooth®  
Deluxe Insulation Group  
Parallel and Perpendicular Park-Assist with Stop  
ParkSense® Front and Rear Park-Assist with Stop  
Global Telematics Box Module (TBM)  
1 Year Trial (Registration Required)  
4G LTE Wi-Fi Hot Spot \$595  
8-Passenger Seating

Destination Charge \$1,495

**TOTAL PRICE: \* \$46,020**

**WARRANTY COVERAGE**  
5-year or 60,000-mile Powertrain Limited Warranty.  
3-year or 36,000-mile Basic Limited Warranty.  
Ask Dealer for a copy of the limited warranties or see your owner's manual for details.

**5 YEAR / 60,000 MILE POWERTRAIN WARRANTY**

Assembly Point/Port of Entry: WINDSOR, ONTARIO, CANADA S.L. SHIP TO: SOLD TO:  
VIN: 2C4-RC1BG6MR-50 LA-VON: 1488 0205-1



THIS LABEL IS ADDED TO THIS VEHICLE TO COMPLY WITH FEDERAL LAW. THE LABEL CANNOT BE REMOVED OR ALTERED PRIOR TO DELIVERY TO THE ULTIMATE PURCHASER.  
\* STATE AND/OR LOCAL TAXES IF ANY, LICENSE AND TITLE FEES, AND DEALER SUPPLIED AND INSTALLED OPTIONS AND ACCESSORIES ARE NOT INCLUDED IN THIS PRICE. DISCOUNT, IF ANY, IS BASED ON PRICE OF OPTIONS IF PURCHASED SEPARATELY.

For more information visit: [www.chrysler.com](http://www.chrysler.com) or call 1-800-CHRYSLER

FCA US LLC

**EPA DOT Fuel Economy and Environment Gasoline Vehicle**

**Fuel Economy** These estimates reflect new EPA methods beginning with 2017 models. **You spend \$1,750 in fuel costs over 5 years** compared to the average new vehicle.

**22 MPG** combined city/hwy  
**19 MPG** city  
**28 MPG** highway  
4.5 gallons per 100 miles

Minivan range from 20 to 48 MPG. The best vehicle rates 141 MPG.

**Annual fuel cost \$1,850**

**Fuel Economy & Greenhouse Gas Rating** (tailpipe only) **Smog Rating** (tailpipe only)

1 4 10 Best  
1 7 10 Best

This vehicle emits 401 grams CO2 per mile. The best emits 0 grams per mile (tailpipe only). Producing and distributing fuel also creates emissions; learn more at [fuelconomy.gov](http://fuelconomy.gov).

Actual results will vary for many reasons, including driving conditions and how you drive and maintain your vehicle. The average new vehicle gets 27 MPG and cost \$7,500 to fuel over 5 years. Cost estimates are based on 15,000 miles per year at \$2.70 per gallon. MPGe is miles per gasoline gallon equivalent. Vehicle emissions are a significant cause of climate change and global warming.

**fuelconomy.gov**  
Calculate personalized estimates and compare vehicles

Searchphone QR code

**GOVERNMENT 5-STAR SAFETY RATINGS**

**Overall Vehicle Score ★★★★★**  
Based on the combined ratings of frontal, side and rollover. Should ONLY be compared to other vehicles of similar size and weight.

**Frontal Crash**  
Driver ★★★★★  
Passenger ★★★★★

**Side Crash**  
Front seat ★★★★★  
Rear seat ★★★★★

**Rollover ★★★**  
Based on the risk of rollover in a single-vehicle crash.

Star ratings range from 1 to 5 stars (★★★★★) with 5 being the highest. Source: National Highway Traffic Safety Administration (NHTSA) [www.safercar.gov](http://www.safercar.gov) or 1-888-327-4236

**PARTS CONTENT INFORMATION**

**FOR VEHICLES IN THIS CARLINE:**  
U.S./CANADIAN PARTS CONTENT: 68%  
MAJOR SOURCES OF FOREIGN PARTS CONTENT:  
MEXICO : 23%  
NOTE: PARTS CONTENT DOES NOT INCLUDE FINAL ASSEMBLY, DISTRIBUTION, OR OTHER NON-PARTS COSTS.

**FOR THIS VEHICLE:**  
FINAL ASSEMBLY POINT:  
WINDSOR, ONTARIO, CANADA  
COUNTRY OF ORIGIN:  
ENGINE: UNITED STATES  
TRANSMISSION: UNITED STATES

**MOPAR VEHICLE PROTECTION**  
A PRODUCT OF FCA US LLC  
Ask for Mopar Vehicle Protection for your vehicle. We Built It. We Back It.

The safety ratings above are based on Federal Government tests of particular vehicles equipped with certain features and options. The performance of this vehicle may differ.

Figure A3. Window Sticker (Monroney Label)



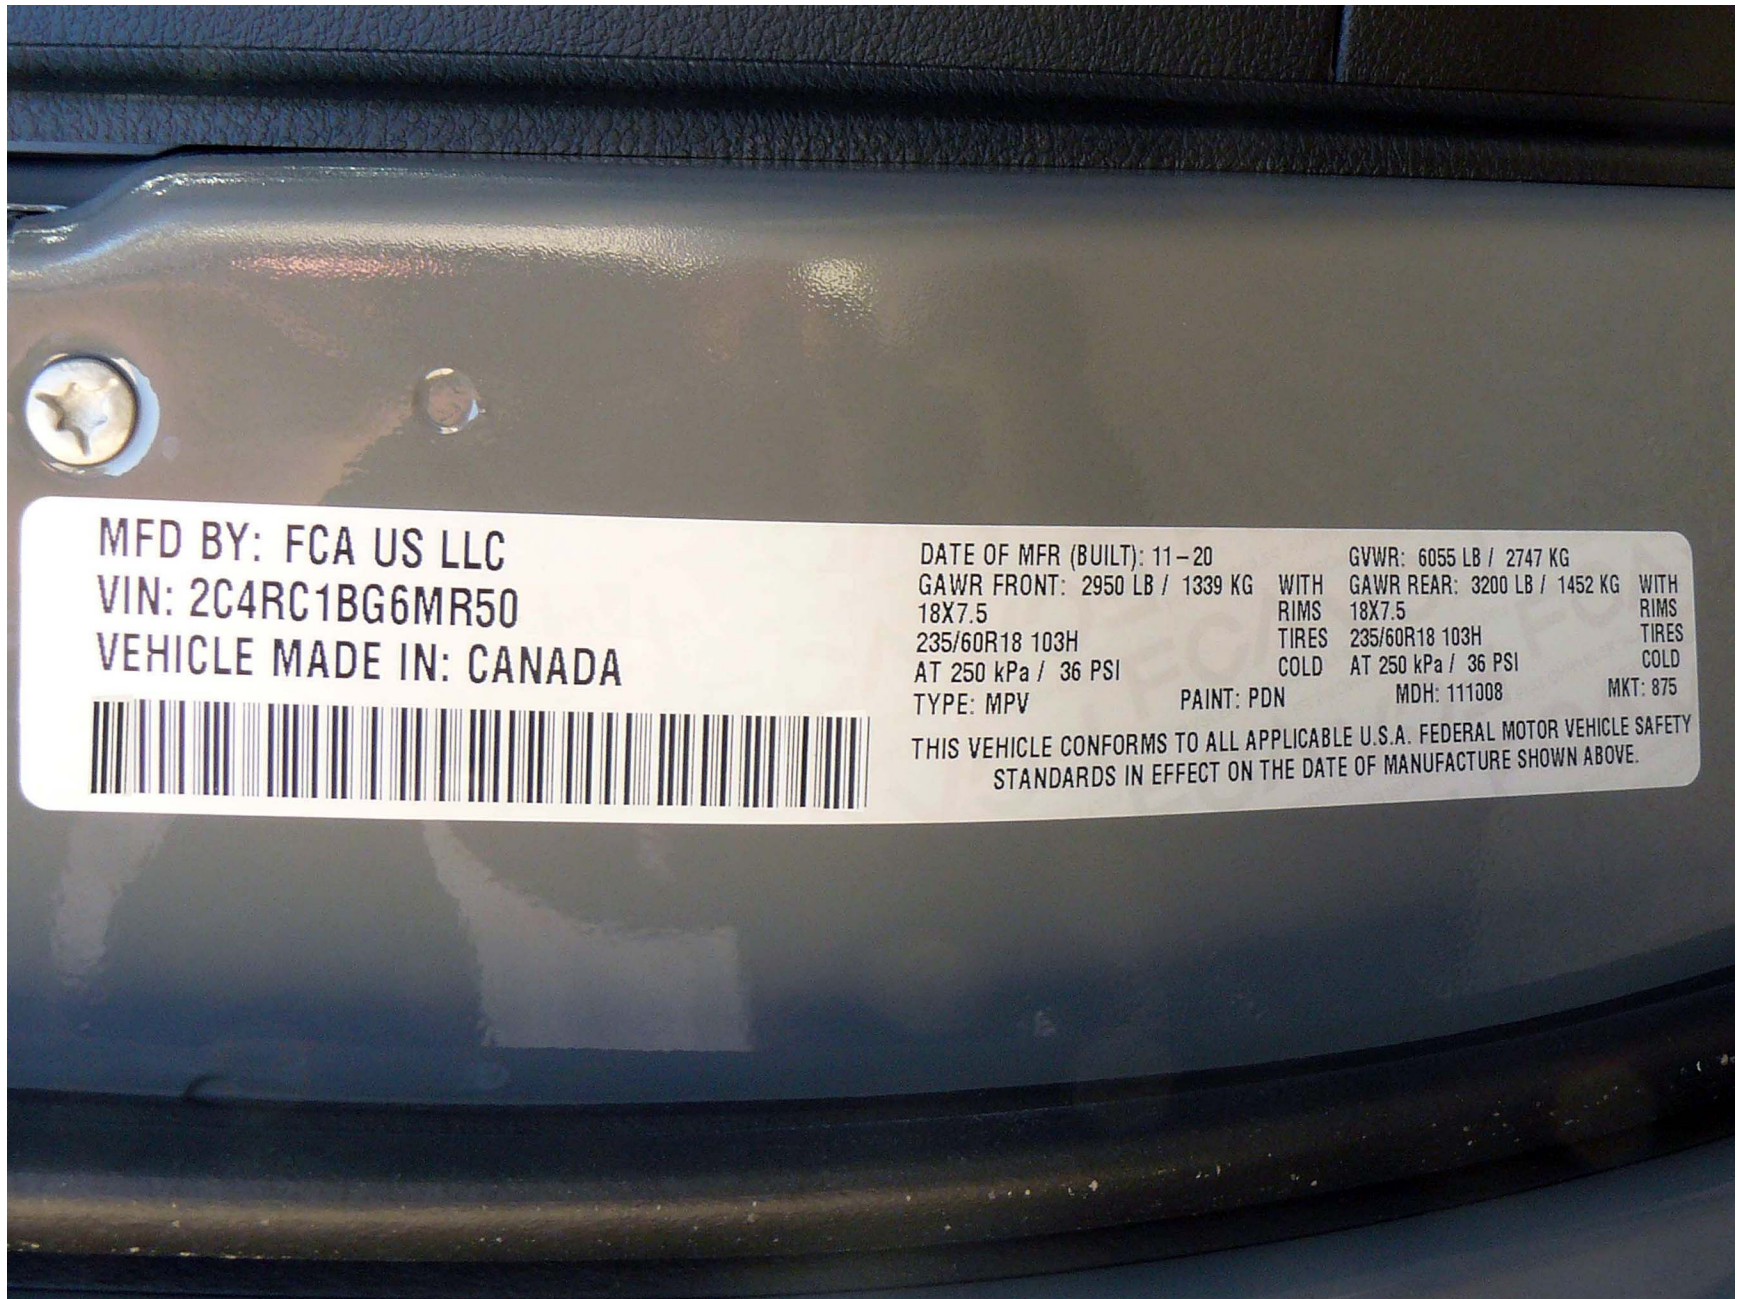


Figure A4. Vehicle Certification Label



### TIRE AND LOADING INFORMATION

SEATING CAPACITY – TOTAL 8 FRONT 2 REAR 6

THE COMBINED WEIGHT OF OCCUPANTS AND CARGO SHOULD NEVER EXCEED  
562 KG OR 1240 LB

TIRE	FRONT	REAR	SPARE
ORIGINAL TIRE SIZE	235/60R18 103H	235/60R18 103H	NONE
COLD TIRE INFLATION PRESSURE	250 kPa / 36 PSI	250 kPa / 36 PSI	NONE

SEE OWNERS MANUAL FOR ADDITIONAL INFORMATION



MR50

Figure A5. Tire Placard



Figure A6. Rear View of Principal Other Vehicle (SSV)



Figure A7. Load Frame/Slider of SSV

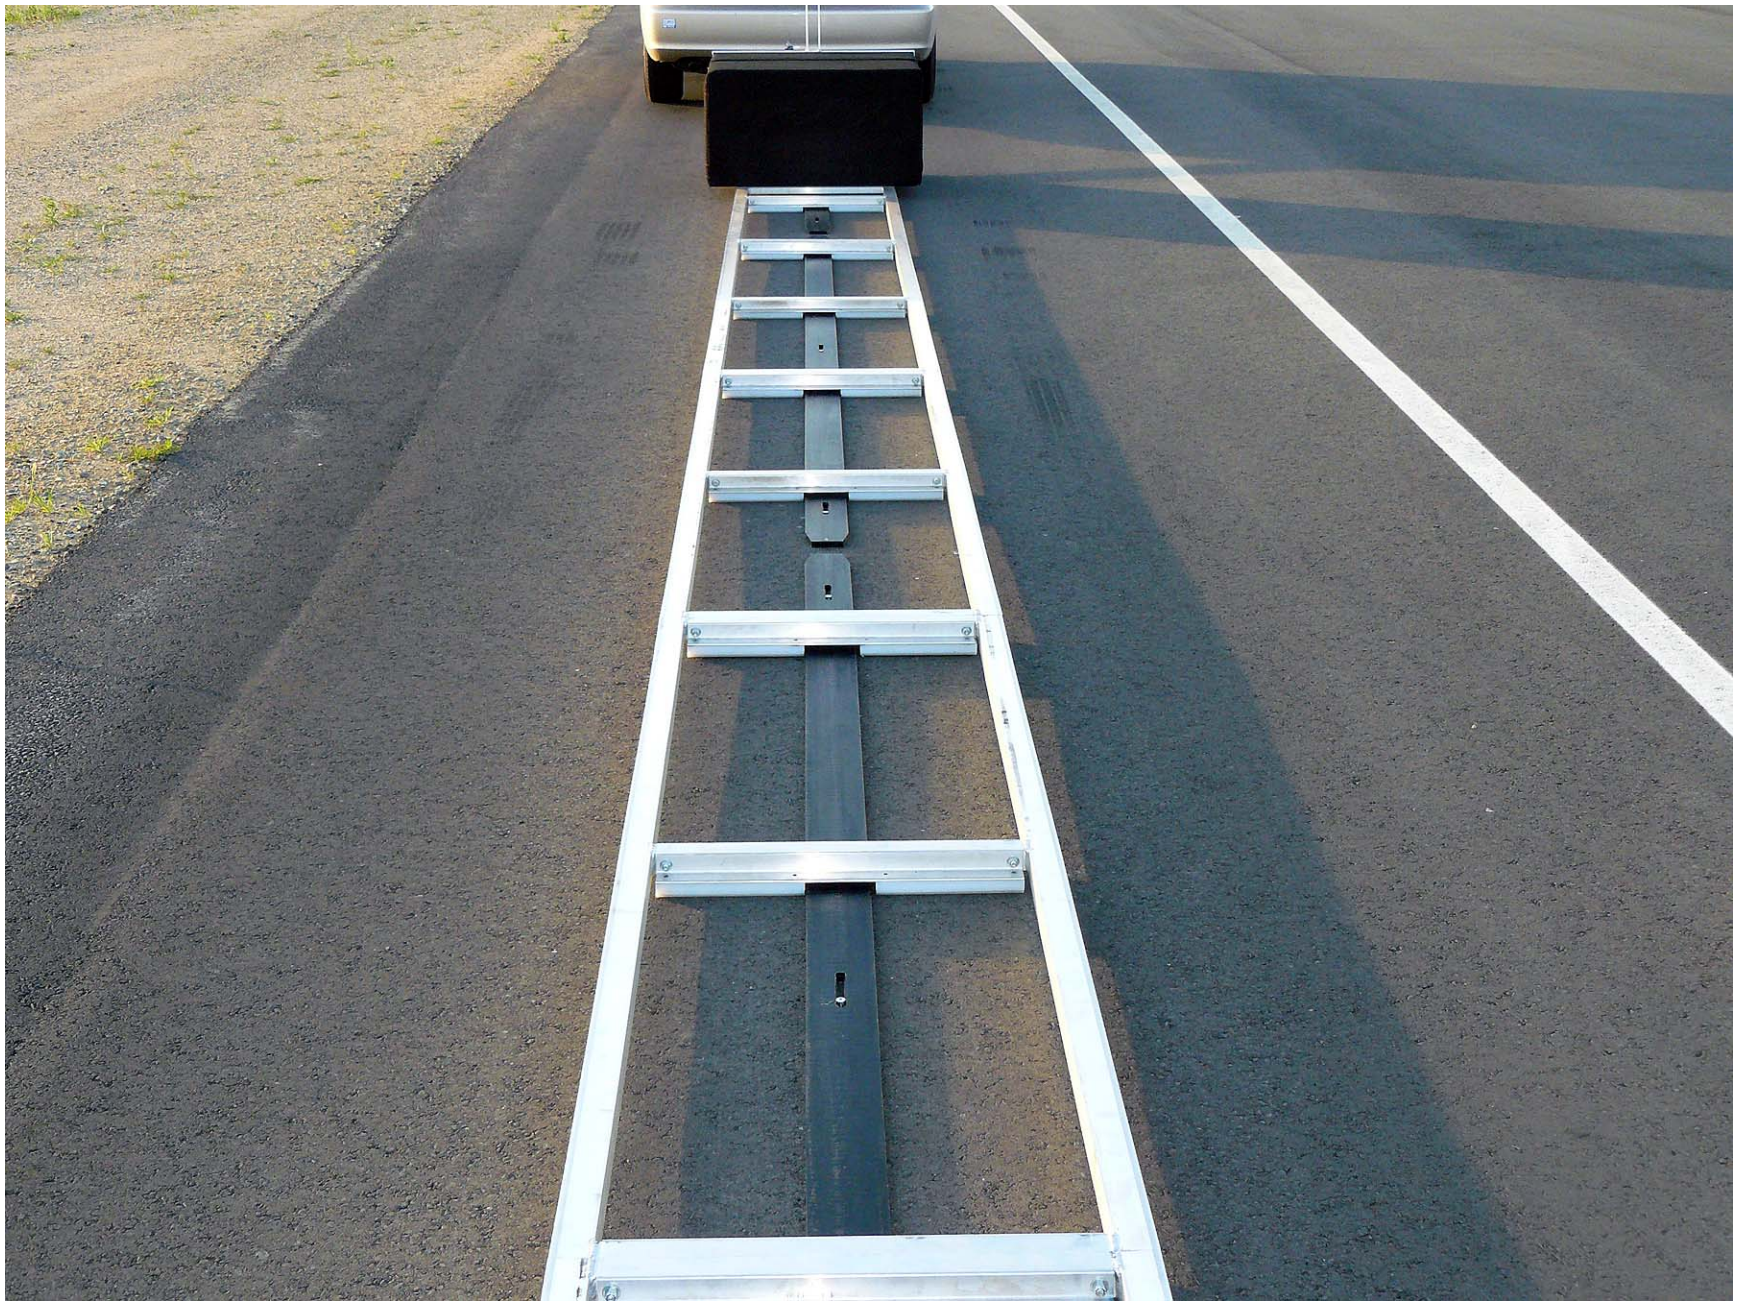


Figure A8. Two-Rail Track and Road-Based Lateral Restraint Track



Figure A9. Steel Trench Plate

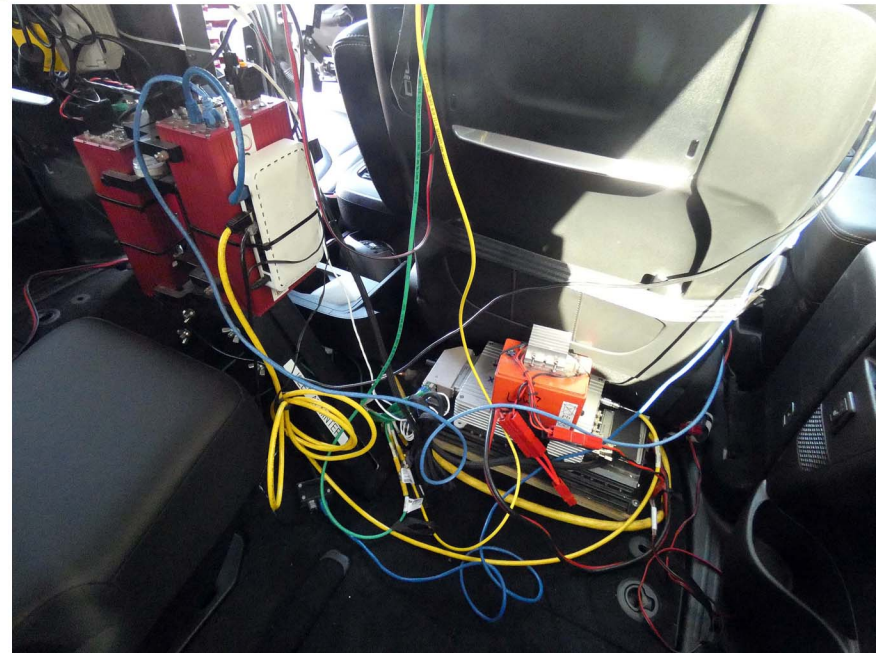


Figure A10. DGPS, Inertial Measurement Unit, and MicroAutoBox Installed in Subject Vehicle



Figure A11. Sensors for Detecting Auditory and Visual Alerts





Figure A12. Computer Installed in Subject Vehicle



Figure A13. Brake Actuator Installed in POV System

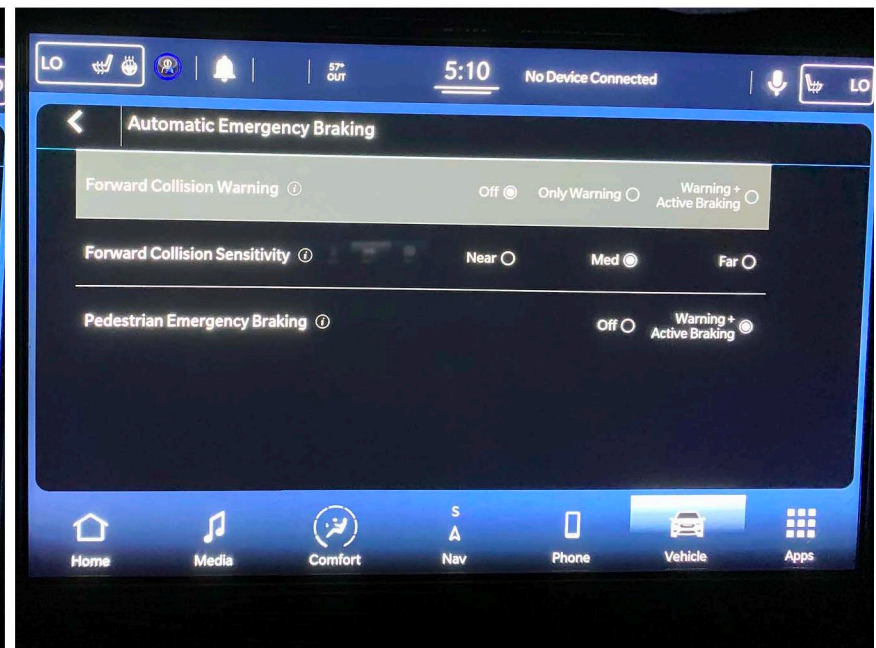
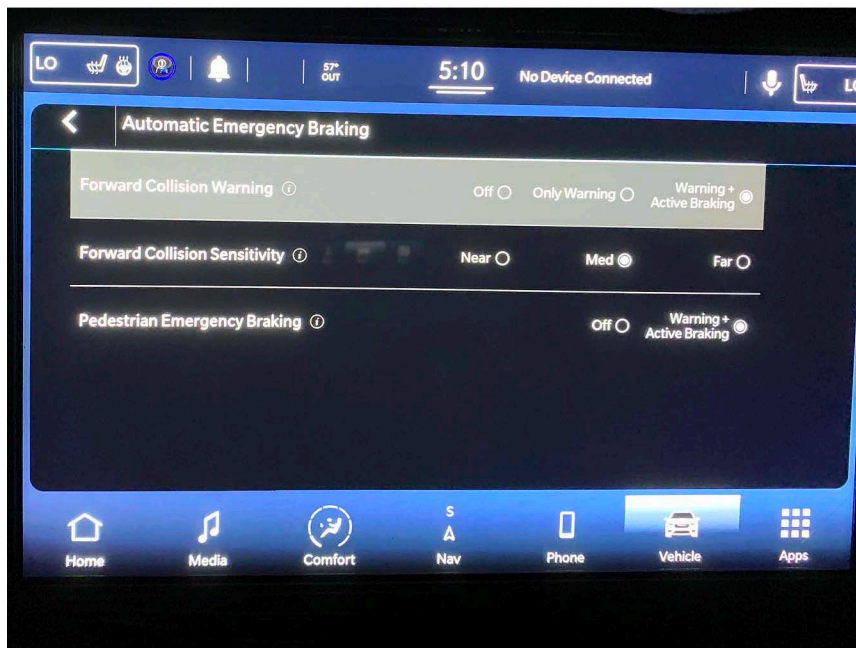


Figure A14. AEB Setup Menus



Figure A15. Visual Alert

## APPENDIX B

Excerpts from Owner's Manual

**YELLOW INDICATOR LIGHTS****Automatic Emergency Braking (AEB) OFF Indicator Light – If Equipped**

This indicator light illuminates to indicate that Forward Collision Warning is off.

**GREEN INDICATOR LIGHTS****Adaptive Cruise Control (ACC) Set With Target Vehicle Detected Light – If Equipped**

This indicator light will illuminate when the Adaptive Cruise Control speed is SET and the vehicle in front is detected → page 165.

**Adaptive Cruise Control (ACC) Set With No Target Detected Light – If Equipped**

This indicator light will illuminate when the Adaptive Cruise Control speed is SET and there is no vehicle in front detected → page 165.

**Cruise Control Set Indicator Light – If Equipped**

This indicator light will illuminate when the cruise control is set to the desired speed → page 164.

**Front Fog Indicator Light – If Equipped**

This indicator light will illuminate when the front fog lights are on.

**KeySense Indicator Light – If Equipped**

The KeySense indicator is illuminated when a KeySense key is detected upon startup of the vehicle. The indicator will remain lit for the entire key cycle as a reminder that the KeySense key is in use. While the KeySense key is in use, the vehicle will respond to settings associated with the KeySense profile → page 14.

**LaneSense Indicator Light – If Equipped**

The LaneSense indicator light illuminates solid green when both lane markings have been detected and the system is “armed” and ready to provide visual and torque warnings if an unintentional lane departure occurs → page 187.

**Park/Headlight On Indicator Light**

This indicator light will illuminate when the park lights or headlights are turned on.

**Stop/Start Active Indicator Light – If Equipped**

This indicator light will illuminate when the Stop/Start function is in “Autostop” mode → page 161.

**Turn Signal Indicator Lights**

When the left or right turn signal is activated, the turn signal indicator will flash independently and the corresponding exterior turn signal lamps will flash. Turn signals can be activated when the multifunction lever is moved down (left) or up (right).

**NOTE:**

- A continuous chime will sound if the vehicle is driven more than 1 mile (1.6 km) with either turn signal on.
- Check for an inoperative outside light bulb if either indicator flashes at a rapid rate.

ACC will allow you to keep Cruise Control engaged in light to moderate traffic conditions without the constant need to reset your Cruise Control. ACC utilizes a radar sensor and a forward facing camera designed to detect a vehicle directly ahead of you.

**NOTE:**

- If the ACC sensor detects a vehicle ahead, ACC will apply limited braking or accelerate (not to exceed the original set speed) automatically to maintain a preset following distance, while matching the speed of the vehicle ahead.
- Any chassis/suspension or tire size modifications to the vehicle will affect the performance of the Adaptive Cruise Control and Forward Collision Warning system.
- Fixed Speed Cruise Control alone (an ACC distance not set) will not detect vehicles directly ahead of you. Always be aware of the mode selected.

**WARNING!**

- Adaptive Cruise Control (ACC) is a convenience system. It is not a substitute for active driver involvement. It is always the driver's responsibility to be attentive of road, traffic, and weather conditions, vehicle speed, distance to the vehicle ahead; and, most importantly, brake operation to ensure safe operation of the vehicle under all road conditions. Your complete attention is always required while driving to maintain safe control of your vehicle. Failure to follow these warnings can result in a collision and death or serious personal injury.
- The ACC system:
  - Does not react to pedestrians, oncoming vehicles, and stationary objects (e.g., a stopped vehicle in a traffic jam or a disabled vehicle).
  - Cannot take street, traffic, and weather conditions into account, and may be limited upon adverse sight distance conditions.

*(Continued)***WARNING! (Continued)**

- Does not always fully recognize complex driving conditions, which can result in wrong or missing distance warnings.
- Will bring the vehicle to a complete stop while following a target vehicle and hold the vehicle for approximately three minutes in the stop position. If the target vehicle does not start moving within three minutes the parking brake will be activated, and the ACC system will be cancelled.

You should switch off the ACC system:

- When driving in fog, heavy rain, heavy snow, sleet, heavy traffic, and complex driving situations (i.e., in highway construction zones).
- When entering a turn lane or highway off ramp; when driving on roads that are winding, icy, snow-covered, slippery, or have steep uphill or downhill slopes.
- When towing a trailer up or down steep slopes.
- When circumstances do not allow safe driving at a constant speed.

To increase the distance setting, push the Distance Increase button and release. Each time the button is pushed, the distance setting increases by one bar (longer).

To decrease the distance setting, push the Distance Decrease button and release. Each time the button is pushed, the distance setting decreases by one bar (shorter).

If there is no vehicle ahead, the vehicle will maintain the set speed. If a slower moving vehicle is detected in the same lane, the instrument cluster displays the ACC Set With Target Detected Indicator Light, and the system adjusts vehicle speed automatically to maintain the distance setting, regardless of the set speed.

The vehicle will then maintain the set distance until:

- The vehicle ahead accelerates to a speed above the set speed.
- The vehicle ahead moves out of your lane or view of the sensor.
- The distance setting is changed.
- The system disengages → page 168.

The maximum braking applied by ACC is limited; however, the driver can always apply the brakes manually, if necessary.

**NOTE:**

The brake lights will illuminate whenever the ACC system applies the brakes.

A Proximity Warning will alert the driver if ACC predicts that its maximum braking level is not sufficient to maintain the set distance. If this occurs, a visual alert "BRAKE" will flash in the instrument cluster display and a chime will sound while ACC continues to apply its maximum braking capacity.

**NOTE:**

The "BRAKE!" screen in the instrument cluster display is a warning for the driver to take action and does not necessarily mean that the Forward Collision Warning system is applying the brakes autonomously.

**Overtake Aid**

When driving with Adaptive Cruise Control (ACC) engaged and following a vehicle, the system will provide an additional acceleration up to the ACC set speed to assist in passing the vehicle. This

additional acceleration is triggered when the driver utilizes the left turn signal and will only be active when passing on the left hand side.

**ACC Operation At Stop**

In the event that the ACC system brings your vehicle to a standstill while following the vehicle in front, your vehicle will resume motion, without the need for any driver action, if the vehicle in front starts moving within two seconds.

If the vehicle in front does not start moving within two seconds of your vehicle coming to a standstill, the driver will either have to push the RES button, or press the accelerator to reengage the ACC to the existing set speed.

**NOTE:**

After the ACC system holds your vehicle at a standstill for approximately three consecutive minutes, the parking brake will be activated, and the ACC system will be cancelled.

While the ACC system is holding your vehicle at a standstill, if the driver seat belt is unbuckled or the driver door is opened, the parking brake will be activated, and the ACC system will be cancelled.



**KeySense**

The vehicle's KeySense settings are protected by a unique four-digit PIN, which the vehicle owner creates when accessing the specific settings for the first time. This four-digit PIN can only be reset by an authorized dealer.

After pressing the KeySense button on the touchscreen, and entering the KeySense PIN, the following settings will be available:

Setting Name	Description
<b>Forward Collision Warning Sensitivity – If Equipped</b>	This setting will change the distance at which the Forward Collision Warning (FCW) alert sounds. The “Medium” setting will have the FCW system signal when an object is in view, and the possibility of a collision is detected. The “Near” setting will have the FCW system signal when the object is closer to the vehicle. The “Far” setting will have the FCW system signal when an object is at a far distance from the vehicle.
<b>Forward Collision Warning – If Equipped</b>	This setting will turn the Forward Collision Warning (FCW) system on or off. The “Warning Only” setting will provide only an audible chime when a collision is detected. The “Warning + Active Braking” setting will provide an audible chime and apply some brake pressure when a collision is detected.
<b>ParkSense – If Equipped</b>	This setting will change the type of ParkSense alert when a close object is detected. The “Sound Only” setting will provide an audible chime when an object is detected. The “Sound and Display” setting will provide both an audible chime and a visual display when an object is detected.
<b>Front ParkSense Volume – If Equipped</b>	This setting adjusts the volume of the Front ParkSense system. The available settings are “Low”, “Medium”, and “High”.

**Safety & Driving Assistance**

After pressing the Safety & Driving Assistance button on the touchscreen, the following settings will be available:

Setting Name	Description
<b>Forward Collision Warning Sensitivity – Located In Automatic Emergency Braking Sub-Menu</b>	This setting will change the distance at which the Forward Collision Warning (FCW) alert sounds. The “Medium” setting will have the FCW system signal when an object is in view, and the possibility of a collision is detected. The “Near” setting will have the FCW system signal when the object is closer to the vehicle. The “Far” setting will have the FCW system signal when an object is at a far distance from the vehicle.
<b>Forward Collision Warning – Located In Automatic Emergency Braking Sub-Menu</b>	This setting will turn the Forward Collision Warning system on or off. The “Off” setting will deactivate the FCW system. The “Warning Only” setting will provide only an audible chime when a collision is detected. The “Warning + Active Braking” setting will provide an audible chime and apply some brake pressure when a collision is detected.
<b>Pedestrian Emergency Braking – Located In Automatic Emergency Braking Sub-Menu</b>	This setting will turn the pedestrian emergency braking system on or off.
<b>LaneSense Warning</b>	This setting will change the distance at which the steering wheel will provide lane departure feedback. The available settings are “Early”, “Medium”, and “Late”.
<b>LaneSense Strength</b>	This setting will change the strength of the steering wheel feedback during a lane departure. The available setting are “Low”, “Medium”, and “High”.

### FORWARD COLLISION WARNING (FCW) WITH MITIGATION — IF EQUIPPED

FCW with Mitigation provides the driver with audible warnings, visual warnings (within the instrument cluster display), and may apply a brake jerk to warn the driver when it detects a potential frontal collision. The warnings and limited braking are intended to provide the driver with enough time to react, avoid or mitigate the potential collision.

#### NOTE:

FCW monitors the information from the forward looking sensors as well as the Electronic Brake Controller (EBC), to calculate the probability of a forward collision. When the system determines that a forward collision is probable, the driver will be provided with audible and visual warnings and may provide a brake jerk warning.

If the driver does not take action based upon these progressive warnings, then the system will provide a limited level of active braking to help slow the vehicle and mitigate the potential forward collision. If the driver reacts to the warnings by braking and the system determines that the driver intends to avoid the collision by

braking but has not applied sufficient brake force, the system will compensate and provide additional brake force as required.

If a FCW with Mitigation event begins at a speed below 37 mph (60 km/h), the system may provide the maximum braking possible to mitigate the potential forward collision. If the Forward Collision Warning with Mitigation event stops the vehicle completely, the system will hold the vehicle at standstill for two seconds and then release the brakes. If a pedestrian is encountered in the path at the same speed threshold, the system will attempt to bring the vehicle to a stop.



When the system determines a collision with the vehicle in front of you is no longer probable, the warning message will be deactivated  
 ⇨ page 417.

#### NOTE:

- The minimum speed for FCW activation is 1 mph (2 km/h).
- The FCW alerts may be triggered on objects other than vehicles such as guard rails or sign posts based on the course prediction. This is expected and is a part of normal FCW activation and functionality.
- It is unsafe to test the FCW system. To prevent such misuse of the system, after four Active Braking events within a key cycle, the Active Braking portion of FCW will be deactivated until the next key cycle.
- The FCW system is intended for on-road use only. If the vehicle is taken off-road, the FCW system should be deactivated to prevent unnecessary warnings to the surroundings.

6

**WARNING!**

Forward Collision Warning (FCW) is not intended to avoid a collision on its own, nor can FCW detect every type of potential collision. The driver has the responsibility to avoid a collision by controlling the vehicle via braking and steering. Failure to follow this warning could lead to serious injury or death.

**Turning FCW On Or Off**

The Forward Collision menu setting is located in the Uconnect settings.

**NOTE:**

The default status of FCW is "on", this allows the system to warn you of a possible collision with the vehicle in front of you.

Changing the FCW status to "off" deactivates the system, so no warning or active braking will be available in case of a possible collision.

**NOTE:**

- The FCW system state is kept in memory from one key cycle to the next. If the system is turned off, it will remain off when the vehicle is restarted.

- FCW can work in conjunction with the KeySense function of the vehicle (if equipped) ⇨ page 124.

**FCW Braking Status And Sensitivity**

The FCW Sensitivity and Active Braking status are programmable through the Uconnect system ⇨ page 210.

The default sensitivity of FCW is the "Medium" setting and the system status is "Warning & Braking". This allows the system to warn the driver of a possible collision with the vehicle in front using audible/visual warnings and it applies autonomous braking.

By changing the FCW status setting to "Far", the system provides possible collision warnings on objects farther away. This results in earlier warnings and provides the most reaction time to avoid possible collisions

By changing the FCW status setting to "Near", the system provides possible collision warnings on objects closer to the vehicle. This results in later warnings and provides less reaction time than the "Far" and "Medium" settings, which allows for a more dynamic driving experience.

**NOTE:**

- Changing the FCW status to "Only Warning" prevents the system from providing limited active braking, or additional brake support if the driver is not braking adequately in the event of a potential frontal collision, but maintains the audible and visual warnings.
- Changing the FCW status to "Off" prevents the system from providing autonomous braking, or additional brake support if the driver is not braking adequately in the event of a potential frontal collision.
- The system will retain the last setting selected by the driver after ignition shut down.
- FCW may not react to irrelevant objects such as overhead objects, ground reflections, objects not in the path of the vehicle, stationary objects that are far away, oncoming traffic, or leading vehicles with the same or higher rates of speed.
- FCW will be disabled like ACC, with the unavailable screens.

**FCW Limited Warning**

If the instrument cluster displays “ACC/FCW Limited Functionality” or “ACC/FCW Limited Functionality Clean Front Windshield” momentarily, there may be a condition that limits FCW functionality. Although the vehicle is still drivable under normal conditions, the active braking may not be fully available. Once the condition that limited the system performance is no longer present, the system will return to its full performance state. If the problem persists, see an authorized dealer.

**Service FCW Warning**

If the system turns off, and the instrument cluster displays:

- ACC/FCW Unavailable Service Required
- Cruise/FCW Unavailable Service Required

This indicates there is an internal system fault. Although the vehicle is still drivable under normal conditions, have the system checked by an authorized dealer.

**Pedestrian Emergency Braking (PEB) – If Equipped**

The Pedestrian Emergency Braking (PEB) is a subsystem of the FCW system which provides the driver with audible and visual warnings in the instrument cluster display, and may apply automatic braking when it detects a potential frontal collision with a pedestrian.

If a PEB event begins at a speed below 37 mph (60 km/h), the system may provide braking to mitigate the potential collision with a pedestrian. If the PEB event stops the vehicle completely, the system will hold the vehicle at a standstill for two seconds and then release the brakes. When the system determines a collision with the pedestrian in front of you is no longer probable, the warning message will be deactivated.

The minimum speed for PEB activation is 3 mph (5 km/h).

**WARNING!**

Pedestrian Emergency Braking (PEB) is not intended to avoid a collision on its own, nor can PEB detect every type of potential collision with a pedestrian. The driver has the responsibility to avoid a collision by controlling the vehicle via braking and steering. Failure to follow this warning could lead to serious injury or death.

**Turning PEB On Or Off****NOTE:**

The default status of PEB is “On.” This allows the system to warn you of a possible frontal collision with the pedestrian.

The PEB button is located in the Uconnect display in the Controls settings → page 210.

To turn the PEB system off, push the Pedestrian Emergency Braking button once.

**6**

## APPENDIX C

### Run Log

Subject Vehicle: **2021 Chrysler Pacifica Touring L S Appearance**

Test Date: **3/23/2021**

Principal Other Vehicle: **SSV**

Run	Test Type	Valid Run?	FCW TTC (s)	Min. Distance (ft)	Speed Reduction (mph)	Peak Decel. (g)	CIB TTC (s)	Pass/Fail	Notes
1	Static Run								
2	<b>Stopped POV</b>	Y	1.40	0.00	5.8	1.09	0.42	Fail	Zero SV front bumper to SSV rear bumper and collect data
3		Y	1.71	0.00	21.1	1.09	0.80	Pass	
4		Y	1.58	0.00	20.6	1.09	0.77	Pass	
5		Y	1.61	0.00	21.6	1.09	0.76	Pass	
6		N							Forgot to cycle ignition
7		Y	1.60	0.00	17.8	1.07	0.75	Pass	
8		Y	1.62	0.00	20.8	1.09	0.79	Pass	
9		Y	1.54	0.00	18.4	1.12	0.76	Pass	
10		Static Run							
11	<b>Slower POV, 25 vs 10</b>	Y	1.93	0.00	4.7	0.75	0.34	Fail	
12		Y	1.83	0.00	6.5	0.98	0.41	Fail	
13		Y	1.90	0.00	7.1	1.01	0.43	Fail	
14		Y	1.97	0.00	6.1	0.89	0.39	Fail	
15		Y	1.89	0.00	5.8	0.89	0.37	Fail	
16	Static Run								Check zero data is within $\pm 0.167$ ft ( $\pm 0.05$ m)
17	<b>Slower POV, 45 vs 20</b>	Y	1.91	0.00	3.5	0.55	1.56	Fail	
18		Y	2.12	0.00	3.0	0.21	1.48	Fail	
19		Y	2.17	0.00	2.5	0.21	1.47	Fail	Vehicle damage, sent to dealership for repairs

Run	Test Type	Valid Run?	FCW TTC (s)	Min. Distance (ft)	Speed Reduction (mph)	Peak Decel. (g)	CIB TTC (s)	Pass/Fail	Notes
20	Static run								Continuation 4/5/21 Check zero data is within $\pm 0.167$ ft ( $\pm 0.05$ m)
21	<b>Decelerating POV</b>	N							Lateral offset
22		Y	1.66	0.00	12.8	1.00	0.62	Pass	
23		N							SV yaw rate, lateral offset
24		Y	1.77	0.00	9.3	1.07	0.57	Fail	
25		Y	1.62	0.00	9.7	1.10	0.58	Fail	
26		Y	1.66	0.00	6.9	0.98	0.46	Fail	
27		Y	1.61	0.00	10.0	1.07	0.54	Fail	
28		Y	1.57	0.00	11.1	1.00	0.61	Pass	
29		Y	1.59	0.00	12.3	0.98	0.61	Pass	
30	Static Run								Check zero data is within $\pm 0.167$ ft ( $\pm 0.05$ m)
31	<b>STP False Positive, 25</b>	Y				0.02		Pass	
32		Y				0.01		Pass	
33		Y					0.01		Pass
34		Y					0.01		Pass
35		Y					0.02		Pass
36		Y					0.02		Pass
37		Y					0.01		Pass
38	STP - Static Run								Check zero data is within $\pm 0.167$ ft ( $\pm 0.05$ m)
39	<b>STP False Positive, 45</b>	Y				0.02		Pass	
40		Y				0.03		Pass	
41		N							Throttle
42		Y					0.03		Pass
43		Y					0.03		Pass
44		Y					0.01		Pass



Run	Test Type	Valid Run?	FCW TTC (s)	Min. Distance (ft)	Speed Reduction (mph)	Peak Decel. (g)	CIB TTC (s)	Pass/Fail	Notes
45	<b>STP False Positive, 45</b>	Y				0.03		Pass	
46		Y				0.03		Pass	
47	STP - Static Run								Check zero data is within $\pm 0.167$ ft ( $\pm 0.05$ m)

## APPENDIX D

### Time History Plots

## LIST OF FIGURES

	Page
Figure D1. Example Time History for Stopped POV, Passing.....	D-9
Figure D2. Example Time History for Slower POV 25 vs. 10, Passing.....	D-10
Figure D3. Example Time History for Slower POV 45 vs. 20, Passing.....	D-11
Figure D4. Example Time History for Decelerating POV 35, Passing.....	D-12
Figure D5. Example Time History for False Positive STP 25, Passing.....	D-13
Figure D6. Example Time History for False Positive STP 45, Passing.....	D-14
Figure D7. Example Time History Displaying Invalid Headway Criteria.....	D-15
Figure D8. Example Time History Displaying Various Invalid Criteria.....	D-16
Figure D9. Example Time History for a Failed Run.....	D-17
Figure D10. Time History for CIB Run 2, SV Encounters Stopped POV.....	D-18
Figure D11. Time History for CIB Run 3, SV Encounters Stopped POV.....	D-19
Figure D12. Time History for CIB Run 4, SV Encounters Stopped POV.....	D-20
Figure D13. Time History for CIB Run 5, SV Encounters Stopped POV.....	D-21
Figure D14. Time History for CIB Run 7, SV Encounters Stopped POV.....	D-22
Figure D15. Time History for CIB Run 8, SV Encounters Stopped POV.....	D-23
Figure D16. Time History for CIB Run 9, SV Encounters Stopped POV.....	D-24
Figure D17. Time History for CIB Run 11, SV Encounters Slower POV, SV 25 mph, POV 10 mph.....	D-25
Figure D18. Time History for CIB Run 12, SV Encounters Slower POV, SV 25 mph, POV 10 mph.....	D-26
Figure D19. Time History for CIB Run 13, SV Encounters Slower POV, SV 25 mph, POV 10 mph.....	D-27
Figure D20. Time History for CIB Run 14, SV Encounters Slower POV, SV 25 mph, POV 10 mph.....	D-28
Figure D21. Time History for CIB Run 15, SV Encounters Slower POV, SV 25 mph, POV 10 mph.....	D-29
Figure D22. Time History for CIB Run 17, SV Encounters Slower POV, SV 45 mph, POV 20 mph.....	D-30
Figure D23. Time History for CIB Run 18, SV Encounters Slower POV, SV 45 mph, POV 20 mph.....	D-31
Figure D24. Time History for CIB Run 19, SV Encounters Slower POV, SV 45 mph, POV 20 mph.....	D-32
Figure D25. Time History for CIB Run 22, SV Encounters Decelerating POV, SV 35 mph, POV 35 mph.....	D-33
Figure D26. Time History for CIB Run 24, SV Encounters Decelerating POV, SV 35 mph, POV 35 mph.....	D-34
Figure D27. Time History for CIB Run 25, SV Encounters Decelerating POV, SV 35 mph, POV 35 mph.....	D-35
Figure D28. Time History for CIB Run 26, SV Encounters Decelerating POV, SV 35 mph, POV 35 mph.....	D-36
Figure D29. Time History for CIB Run 27, SV Encounters Decelerating POV, SV 35 mph, POV 35 mph.....	D-37

Figure D30. Time History for CIB Run 28, SV Encounters Decelerating POV, SV 35 mph, POV 35 mph .....	D-38
Figure D31. Time History for CIB Run 29, SV Encounters Decelerating POV, SV 35 mph, POV 35 mph .....	D-39
Figure D32. Time History for CIB Run 31, SV Encounters Steel Trench Plate, SV 25 mph.....	D-40
Figure D33. Time History for CIB Run 32, SV Encounters Steel Trench Plate, SV 25 mph.....	D-41
Figure D34. Time History for CIB Run 33, SV Encounters Steel Trench Plate, SV 25 mph.....	D-42
Figure D35. Time History for CIB Run 34, SV Encounters Steel Trench Plate, SV 25 mph.....	D-43
Figure D36. Time History for CIB Run 35, SV Encounters Steel Trench Plate, SV 25 mph.....	D-44
Figure D37. Time History for CIB Run 36, SV Encounters Steel Trench Plate, SV 25 mph.....	D-45
Figure D38. Time History for CIB Run 37, SV Encounters Steel Trench Plate, SV 25 mph.....	D-46
Figure D39. Time History for CIB Run 39, SV Encounters Steel Trench Plate, SV 45 mph.....	D-47
Figure D40. Time History for CIB Run 40, SV Encounters Steel Trench Plate, SV 45 mph.....	D-48
Figure D41. Time History for CIB Run 42, SV Encounters Steel Trench Plate, SV 45 mph.....	D-49
Figure D42. Time History for CIB Run 43, SV Encounters Steel Trench Plate, SV 45 mph.....	D-50
Figure D43. Time History for CIB Run 44, SV Encounters Steel Trench Plate, SV 45 mph.....	D-51
Figure D44. Time History for CIB Run 45, SV Encounters Steel Trench Plate, SV 45 mph.....	D-52
Figure D45. Time History for CIB Run 46, SV Encounters Steel Trench Plate, SV 45 mph.....	D-53

## Description of Time History Plots

A set of time history plots is provided for each valid run in the test series. Each set of plots comprises time varying data from both the Subject Vehicle (SV) and the Principal Other Vehicle (POV), as well as pass/fail envelopes and thresholds. The following is a description of data types shown in the time history plots, as well as a description of the color codes indicating to which vehicle the data pertain.

### Time History Plot Description

Each time history plot consists of data relevant to the test type under consideration, and therefore the data channels plotted vary according to test type. The test types (shown in the plot titles) include:

- Stopped POV (SV at 25 mph)
- Slower POV, 25/10 (SV at 25 mph, POV at 10 mph)
- Slower POV, 45/20 (SV at 45 mph, POV at 20 mph)
- Decelerating POV 35 mph (Both vehicles at 35 mph with 13.8 m gap, POV brakes at 0.3 g)
- False Positive STP 25 mph (Steel trench plate run over at 25 mph)
- False Positive STP 45 mph (Steel trench plate run over at 45 mph)

Time history figures include the following sub-plots:

- FCW Warning – Displays the Forward Collision Warning alert (which can be auditory, visual, or haptic). Depending on the type of FCW alert or instrumentation used to measure the alert, this can be any combination of the following:
  - Filtered, rectified, and normalized sound signal. The vertical scale is 0 to 1.
  - Filtered, rectified, and normalized acceleration (i.e., haptic alert, such as steering wheel vibration). The vertical scale is 0 to 1.
  - Normalized light sensor signal. The vertical scale is 0 to 1.

As only the auditory or haptic alert is perceptible by the driver during a test run, the earliest of either of these alerts is used to define the onset of the FCW alert. A vertical black bar on the plot indicates the TTC (sec) at the first moment of the warning issued by the FCW system. The FCW TTC is displayed to the right of the subplot in green. For False Positive tests, when the FCW presents a warning “FCW” is shown in red at the right edge of the FCW plot.

- Headway (ft) – Longitudinal separation (gap) between the frontmost point of the Subject Vehicle and the rearmost point of the Strikeable Surrogate Vehicle (SSV) towed by the Principal Other Vehicle. The minimum headway during the run is displayed to the right of the subplot.
- SV/POV Speed (mph) – Speed of the Subject Vehicle and Principal Other Vehicle (if any). For CIB tests, the speed reduction experienced by the Subject Vehicle is displayed to the right of the subplot.
- Yaw Rate (deg/sec) – Yaw rate of the Subject Vehicle and Principal Other Vehicle (if any).
- Lateral Offset (ft) – Lateral offset within the lane of the Subject Vehicle to the center of the lane of travel. Note that for tests involving the Strikeable Surrogate Vehicle (SSV), the associated lateral restraint track is defined to be the center of the lane of travel. If testing is done with a different POV which does not have a lateral restraint track, lateral offset is defined to be the lateral offset between the SV and POV.
- Ax (g) – Longitudinal acceleration of the Subject Vehicle and Principal Other Vehicle (if any). For CIB tests, the TTC (sec) at the moment of first CIB activation is displayed to the right of the subplot in green. Also, the peak value of Ax for the SV is shown on the subplot.
- Accelerator Pedal Position (0-1) – Normalized position of the accelerator pedal.

## Envelopes and Thresholds

Some of the time history plot figures contain either green or yellow envelopes and/or black threshold lines. These envelopes and thresholds are used to programmatically and visually determine the validity of a given test run. Envelope and threshold exceedances are indicated with either red shading or red asterisks, and red text is placed to the right side of the plot indicating the type of exceedance. Such exceedances indicate either that the test was invalid or that the requirements of the test were not met (i.e., failure of the AEB system).

For plots with green envelopes, in order for the test to be valid, the time-varying data must not exceed the envelope boundaries at any time. Exceedances of a green envelope are indicated by red shading in the area between the measured time-varying data and the envelope boundaries.

For plots with yellow envelopes, in order for the test to be valid, the time-varying data must not exceed the envelope at the beginning (left edge of the boundary) and/or end (right edge), but may exceed the boundary during the time

between the left and right edges. Exceedances at the left or right extent of a yellow envelope are indicated by red asterisks.

For the headway plot, a dashed black threshold line indicating a relative headway of zero is displayed. If no impact occurs, a green circle is displayed at the moment of minimum distance. If impact occurs, a red asterisk is displayed at the moment of impact.

For the Ax plot, if the scenario is an AEB brake-to-stop scenario, a vertical dashed black line is displayed for all plots indicating the moment of first POV braking. The yellow envelope in this case is relevant to the POV braking only. The left edge of the envelope is at 1.5 seconds after the first POV braking. A solid black threshold line extends horizontally 0.5 seconds to the left of the envelope. This threshold line represents the time during which the Ax of the Principal Other Vehicle must first achieve 0.27 g (the upper edge of the envelope). A green circle or red asterisk is displayed at the moment the POV brake level achieves 0.27 g. A green circle indicates that the test was valid (the threshold was crossed during the appropriate interval) and a red asterisk indicates that the test was invalid (the threshold was crossed outside of the appropriate interval). Additionally, for the CIB tests, a dashed black threshold line indicating an Ax of -0.15 g is given to define the onset of CIB activation. When the Subject Vehicle's Ax crosses this threshold, the CIB TTC is calculated and displayed.

For the accelerator pedal position plot, a green envelope is given starting 500 ms after the onset of the FCW warning to ensure that the accelerator pedal was released at the correct time and remained off for the duration of the CIB event. For false positive runs a green dot, rather than a green envelope is displayed. The green dot indicates that at the end of the run the accelerator pedal had not been released. If the accelerator had been released a red asterisk would appear.

## Color Codes

Color codes have been adopted to easily identify which data correspond to which vehicle, as well as to indicate the types of envelopes and thresholds used in the plots.

Color codes can be broken into four categories:

1. Time-varying data
2. Validation envelopes and thresholds
3. Individual data points
4. Text

1. Time-varying data color codes:

- Blue = Subject Vehicle data
- Magenta = Principal Other Vehicle data
- Brown = Relative data between SV and POV (i.e., TTC, lateral offset and headway distance)

2. Validation envelope and threshold color codes:

- Green envelope = time varying data must be within the envelope at all times in order to be valid
- Yellow envelope = time varying data must be within limits at left and/or right ends
- Black threshold (Solid) = time varying data must cross this threshold in the time period shown in order to be valid
- Black threshold (Dashed) = for reference only – this can include warning level thresholds, TTC thresholds, and acceleration thresholds

3. Individual data point color codes:

- Green circle = passing or valid value at a given moment in time
- Red asterisk = failing or invalid value at a given moment in time

4. Text color codes:

- Green = passing or valid value
- Red = failing or invalid value



## Other Notations

- NG – Indicates that the value for that variable was outside of bounds and therefore “No Good”.
- No Wng – No warning was detected.
- POV – Indicates that the value for the Principal Other Vehicle was out of bounds.
- SV – Indicates that the value for the Subject Vehicle was out of bounds.
- SR – Shows the speed reduction value.
- Thr – Indicates that the requirements for the throttle were not met.

The minimum (worst) GPS fix type is displayed in the lower right corner of each page. The only valid fix type is RTK fixed (displayed in green). If the fix type during any portion of the test was anything other than RTK fixed, then “RTK Fixed OR LESS!!” is displayed in red.

Examples of time history plots for each test type (including passing, failing and invalid runs) are shown in Figure D1 through Figure D9. Figures D1 through D6 show passing runs for each of the 6 test types. Figures D7 and D8 show examples of invalid runs. Figure D9 shows an example of a valid test that failed the CIB requirements.

Time history data plots for the tests of the vehicle under consideration herein are provided beginning with Figure D10.

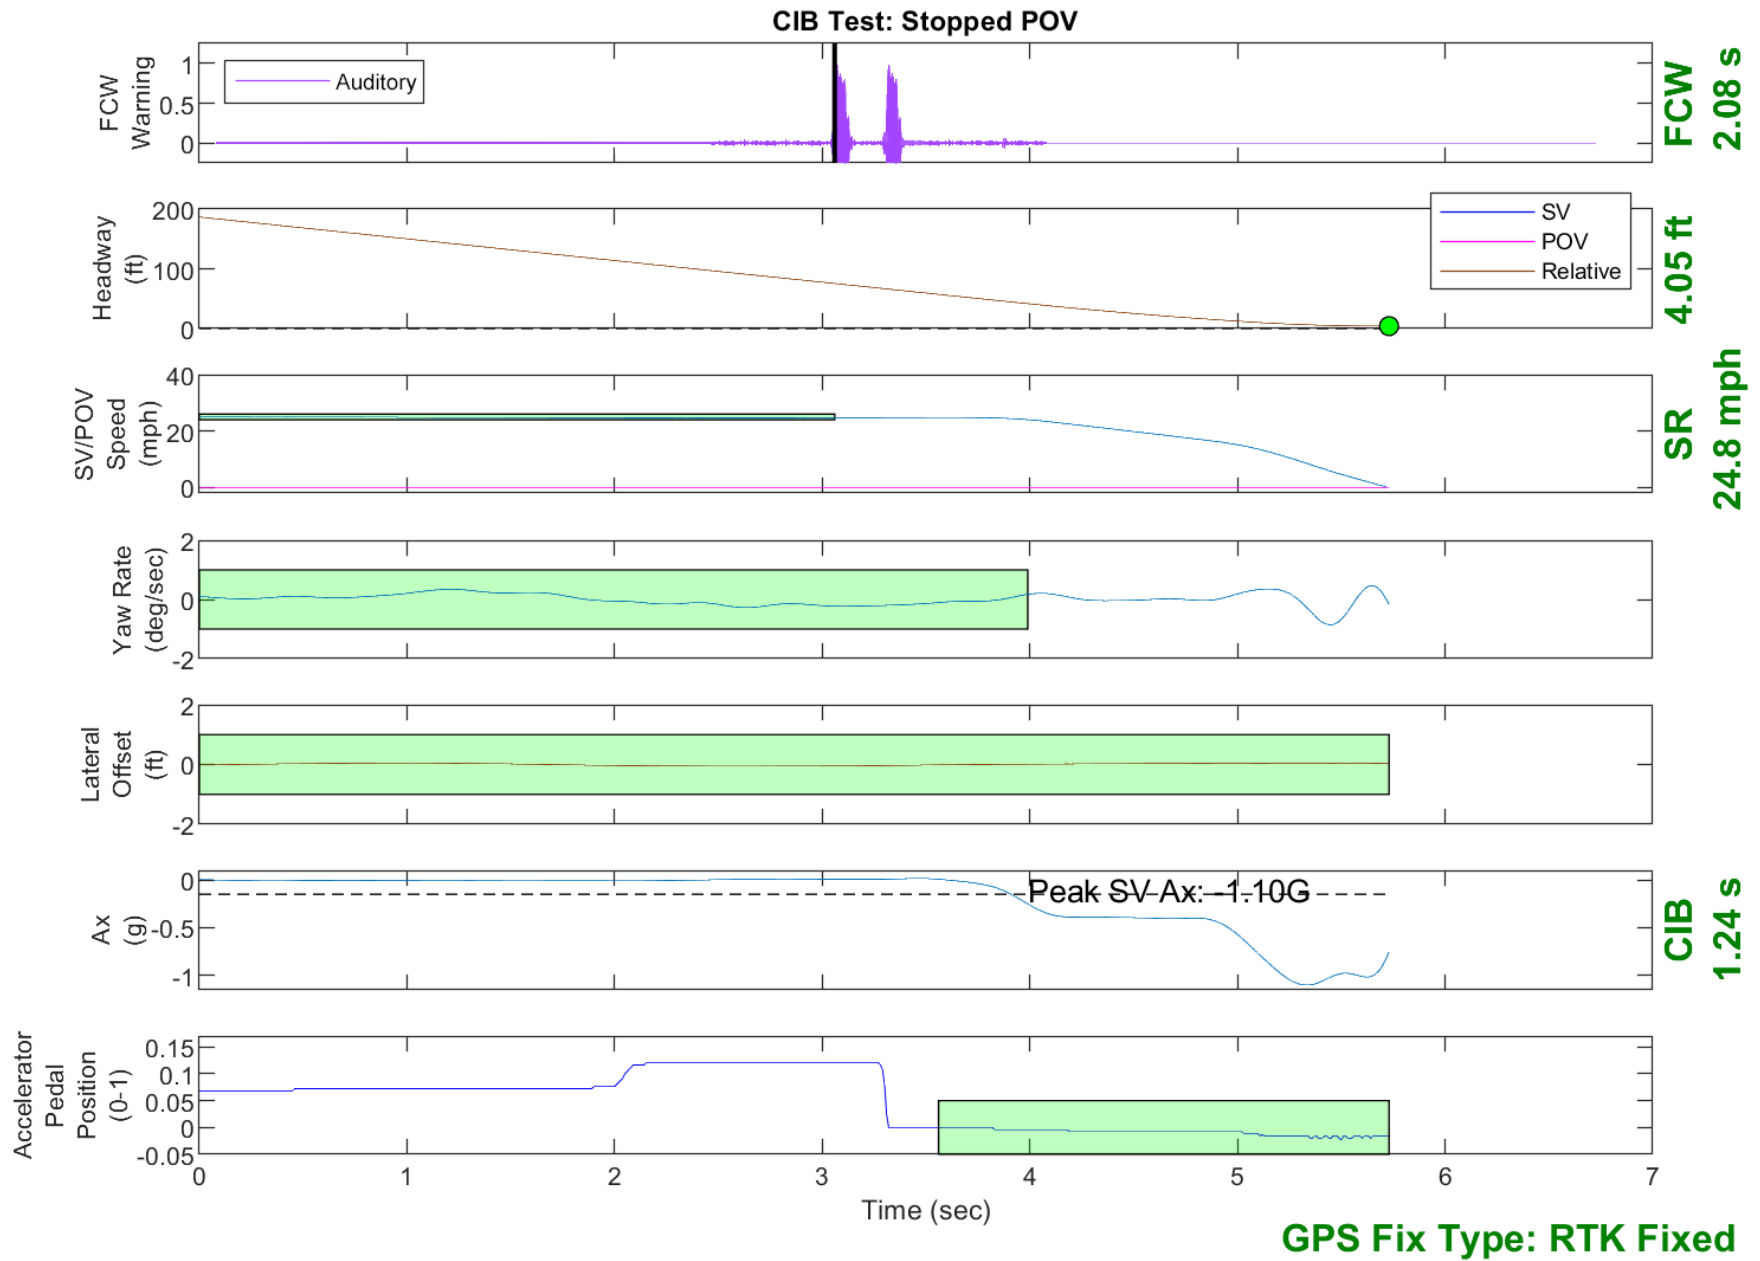


Figure D1. Example Time History for Stopped POV, Passing

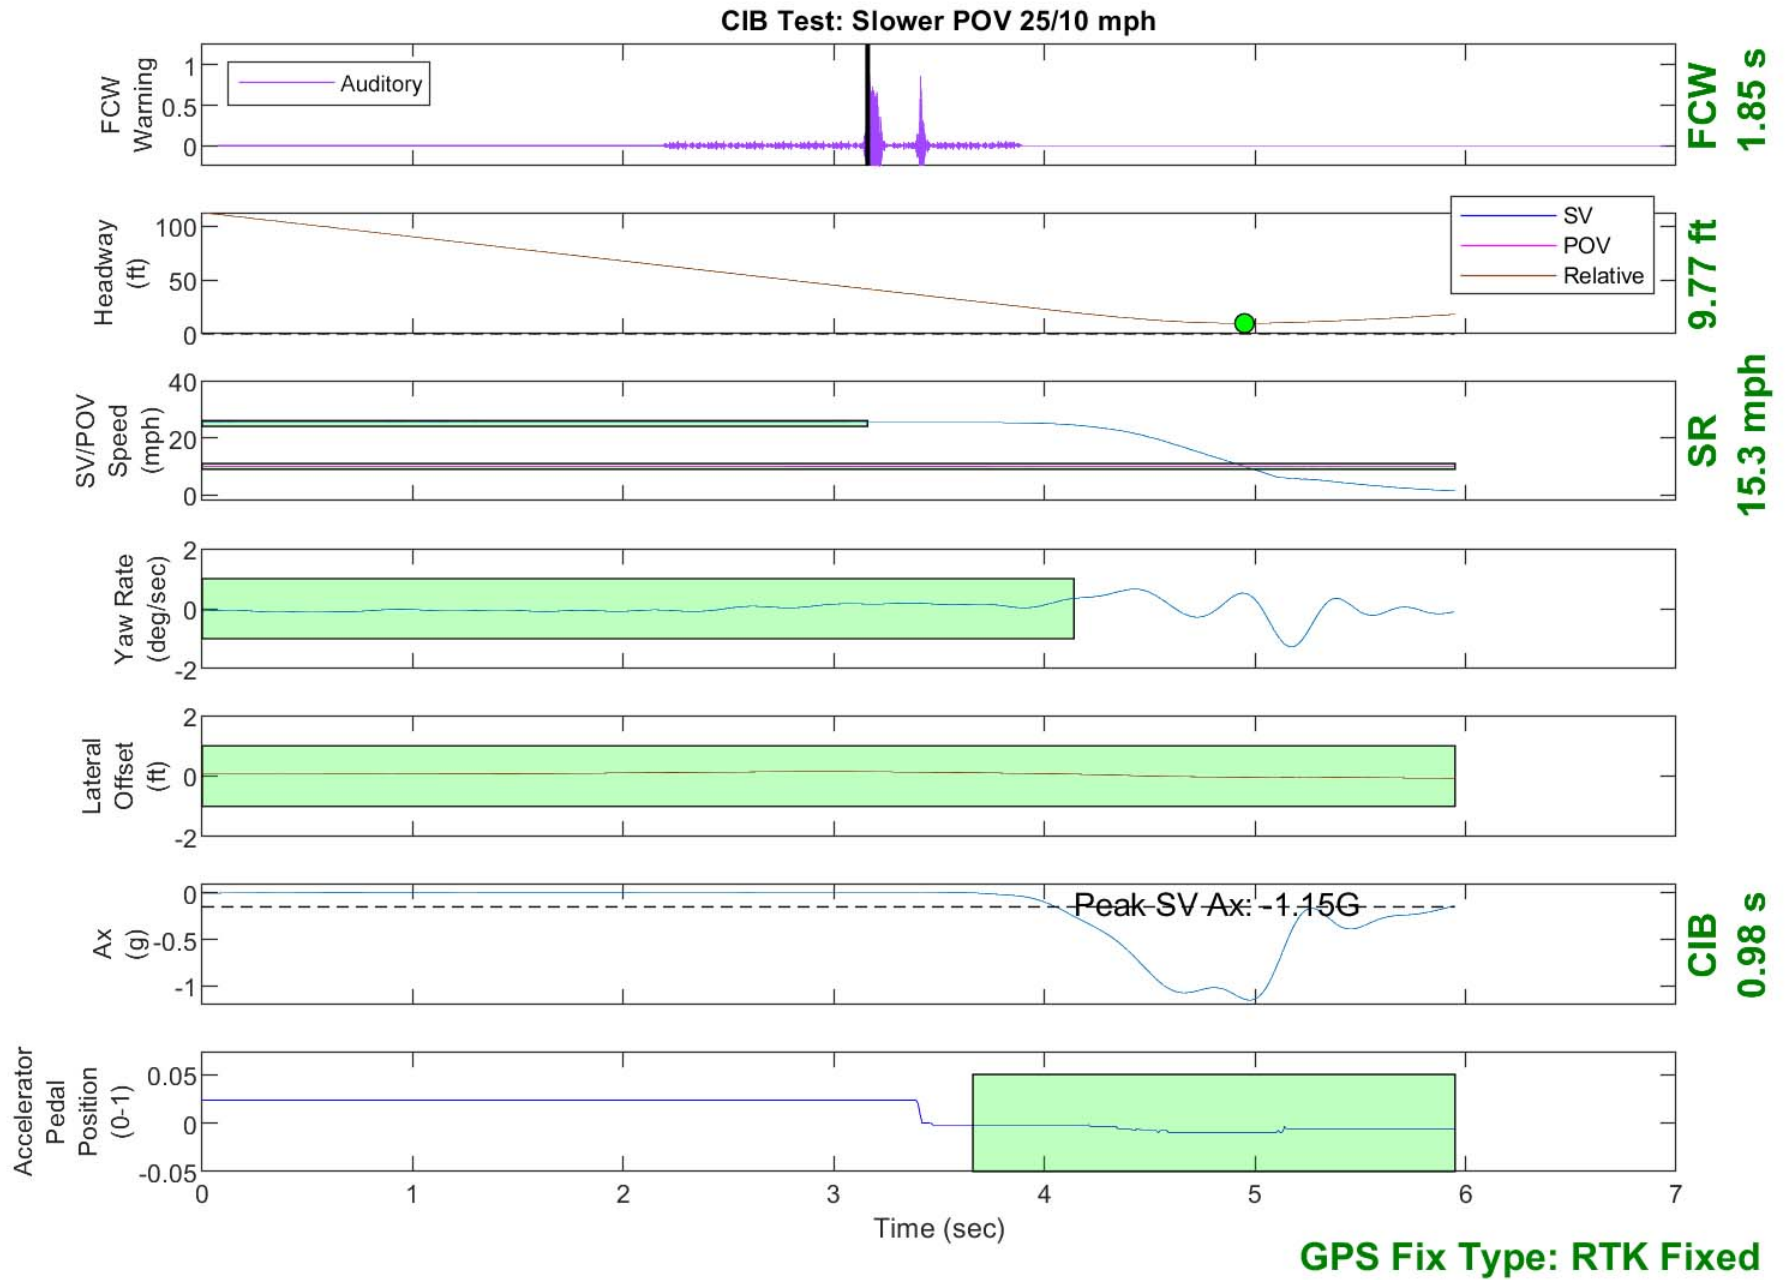


Figure D2. Example Time History for Slower POV 25 vs. 10, Passing

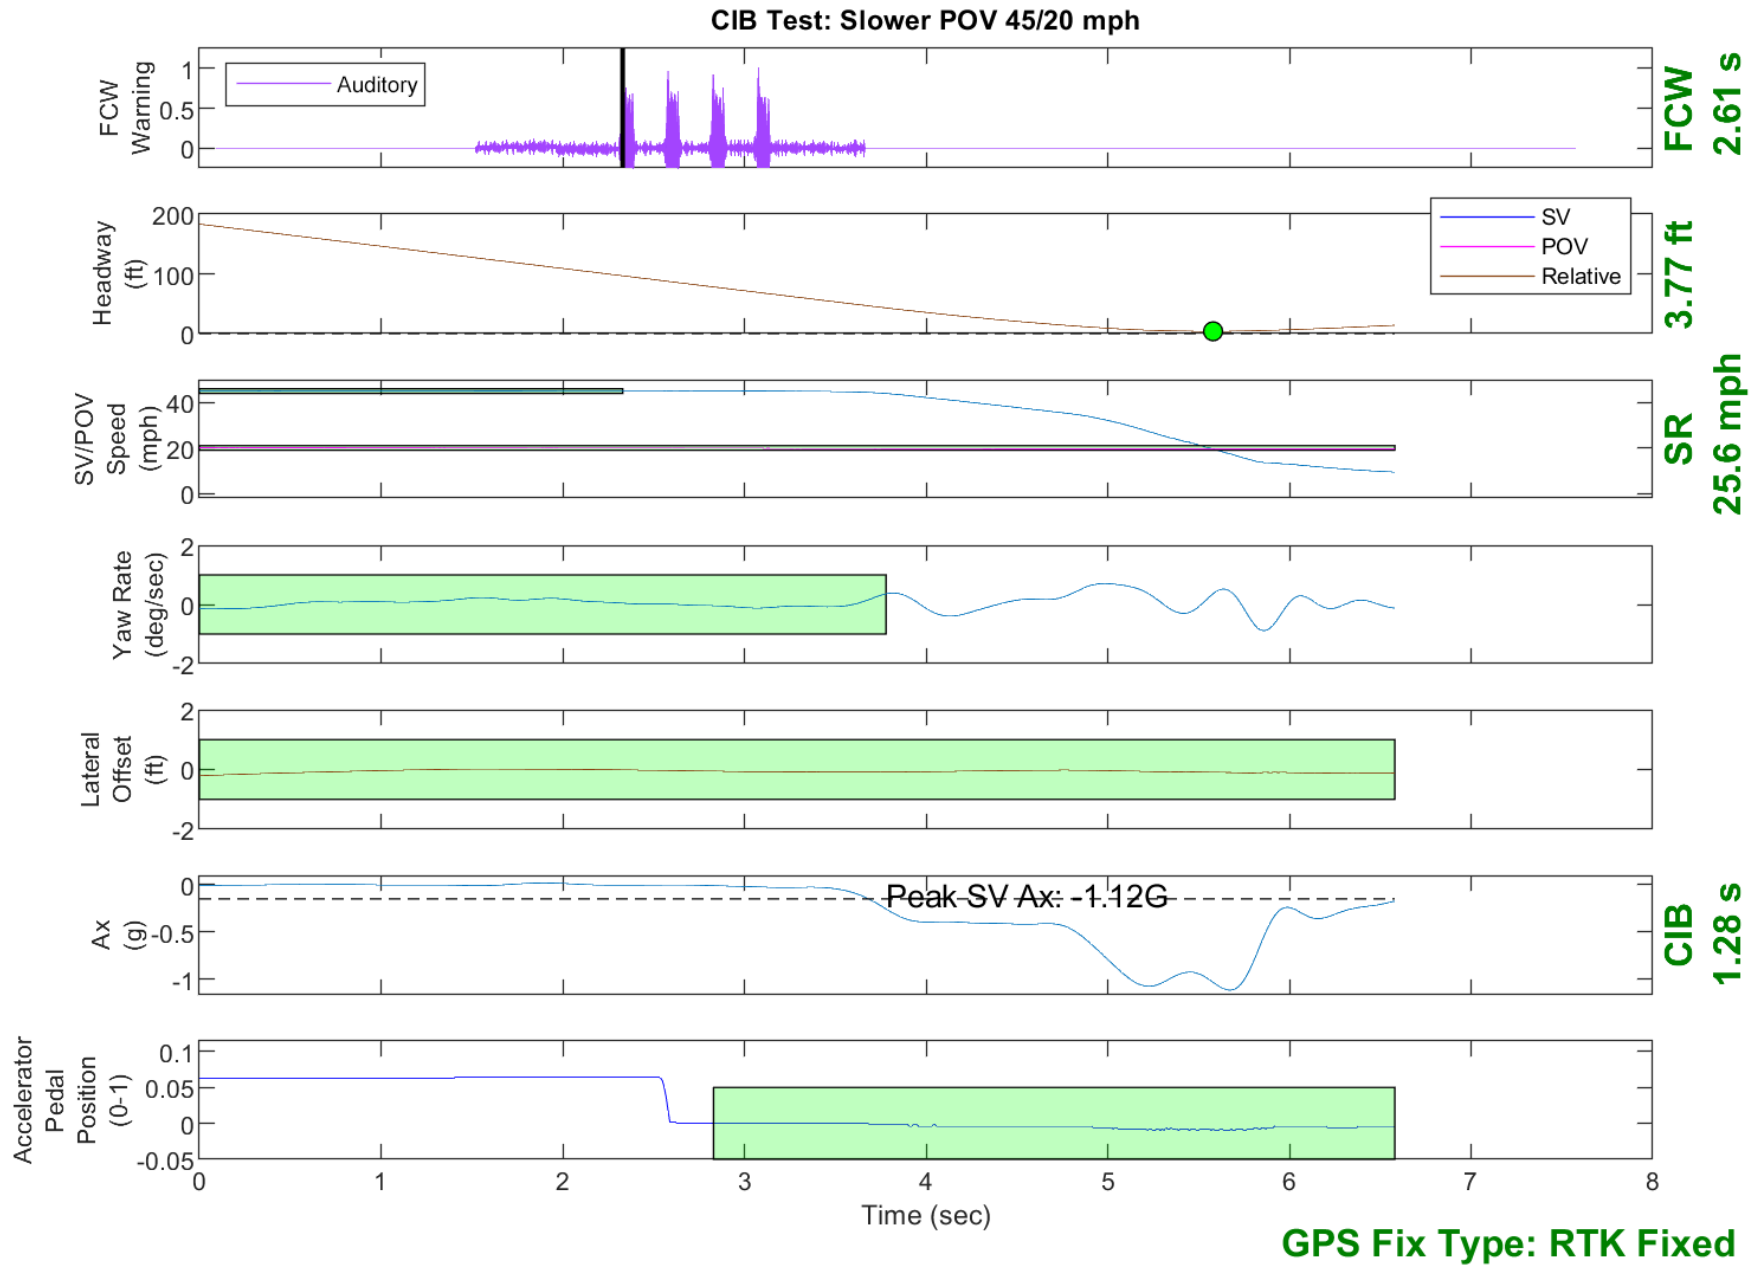


Figure D3. Example Time History for Slower POV 45 vs. 20, Passing

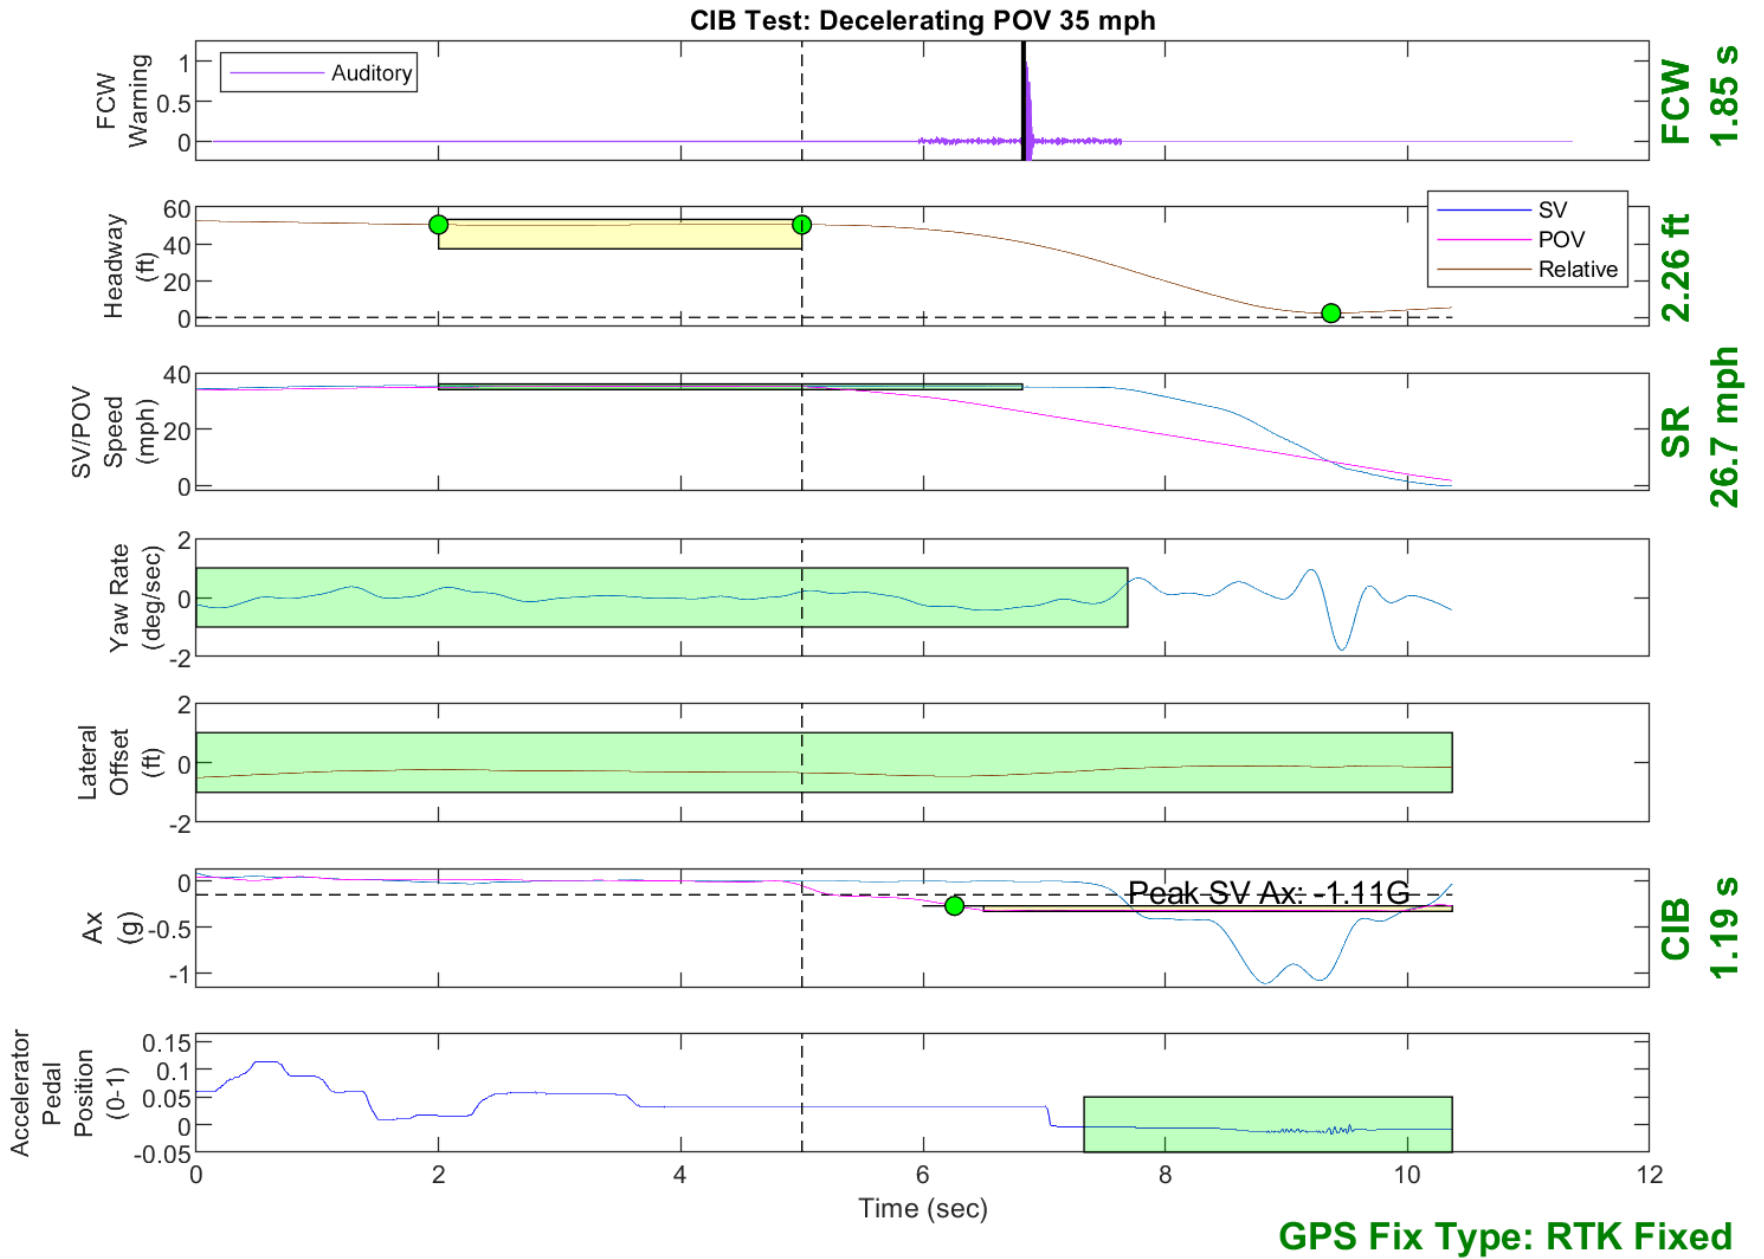


Figure D4. Example Time History for Decelerating POV 35, Passing

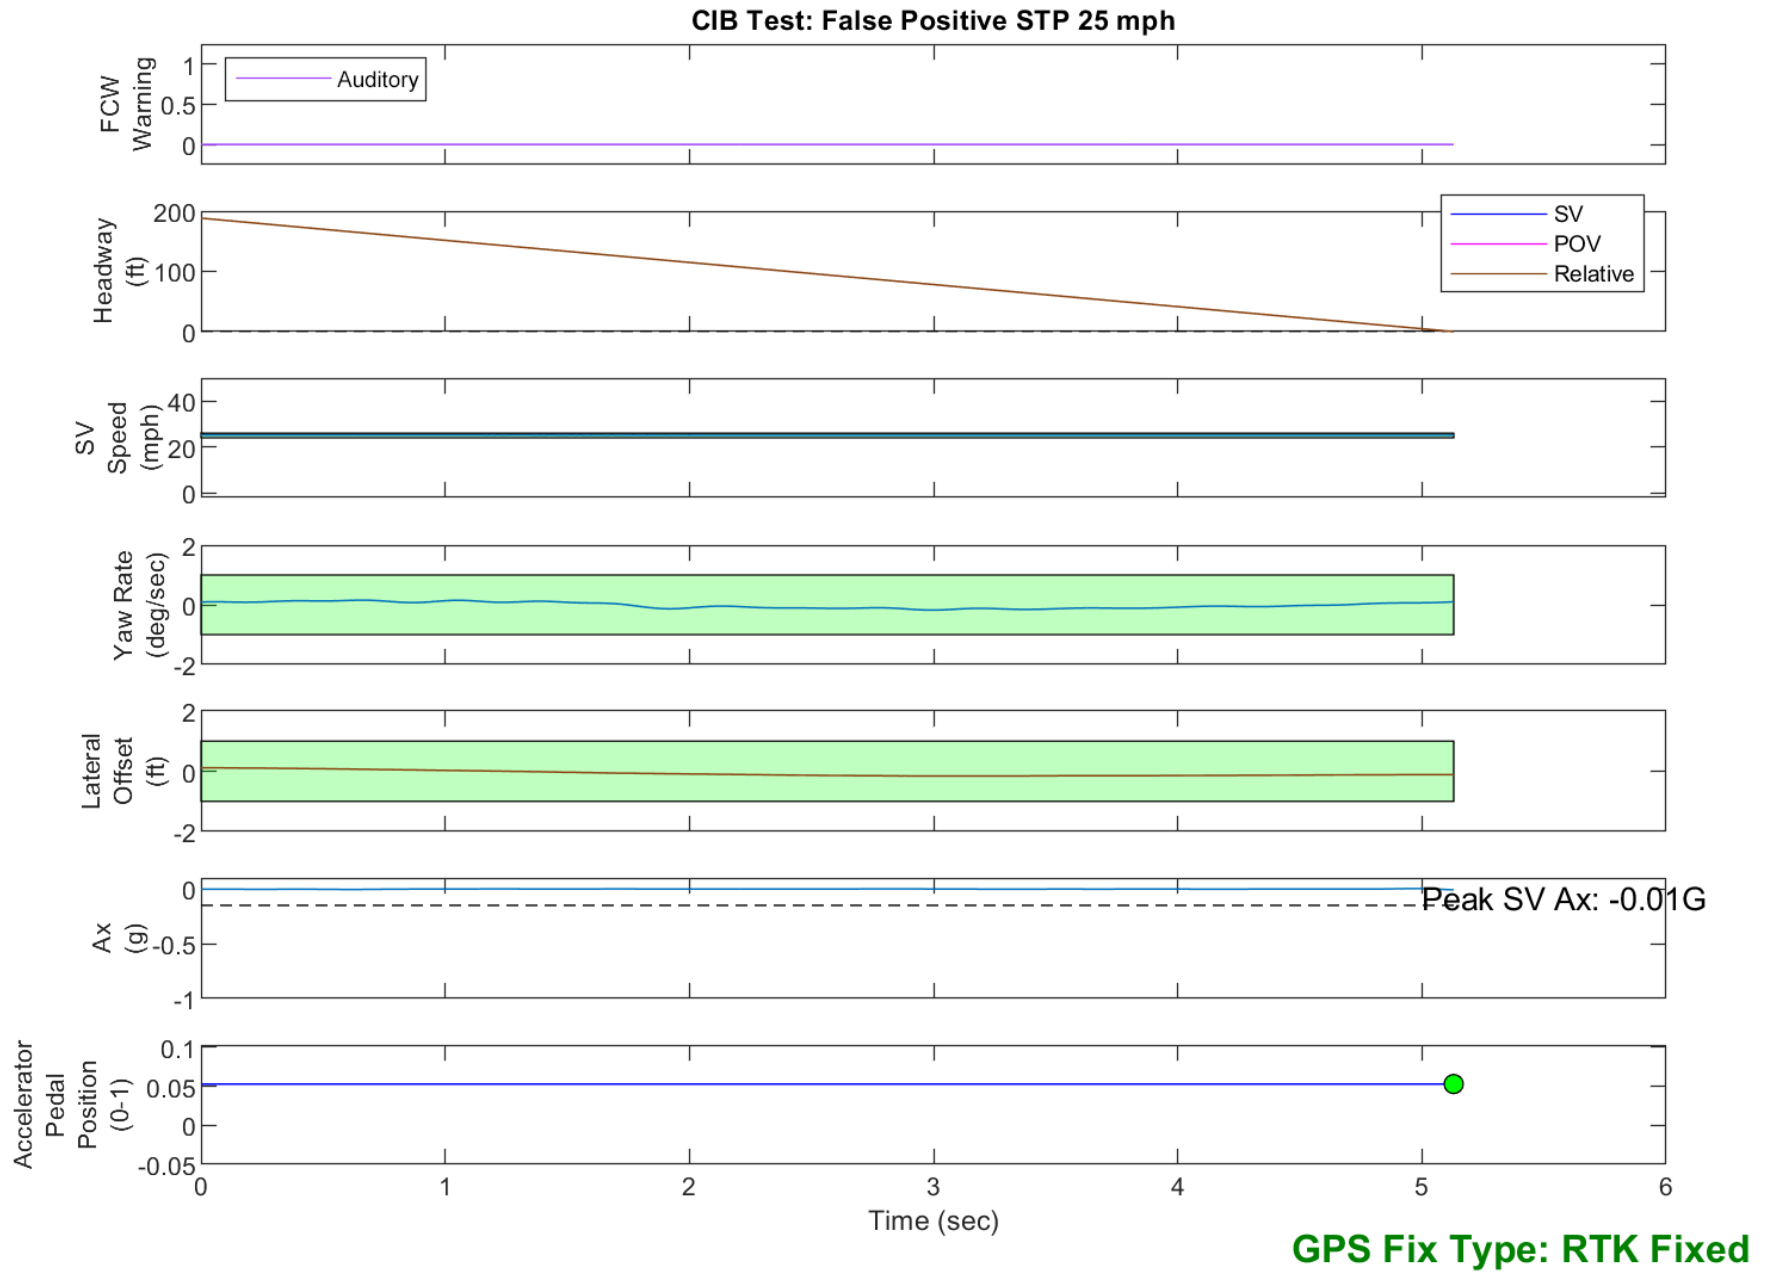


Figure D5. Example Time History for False Positive STP 25, Passing

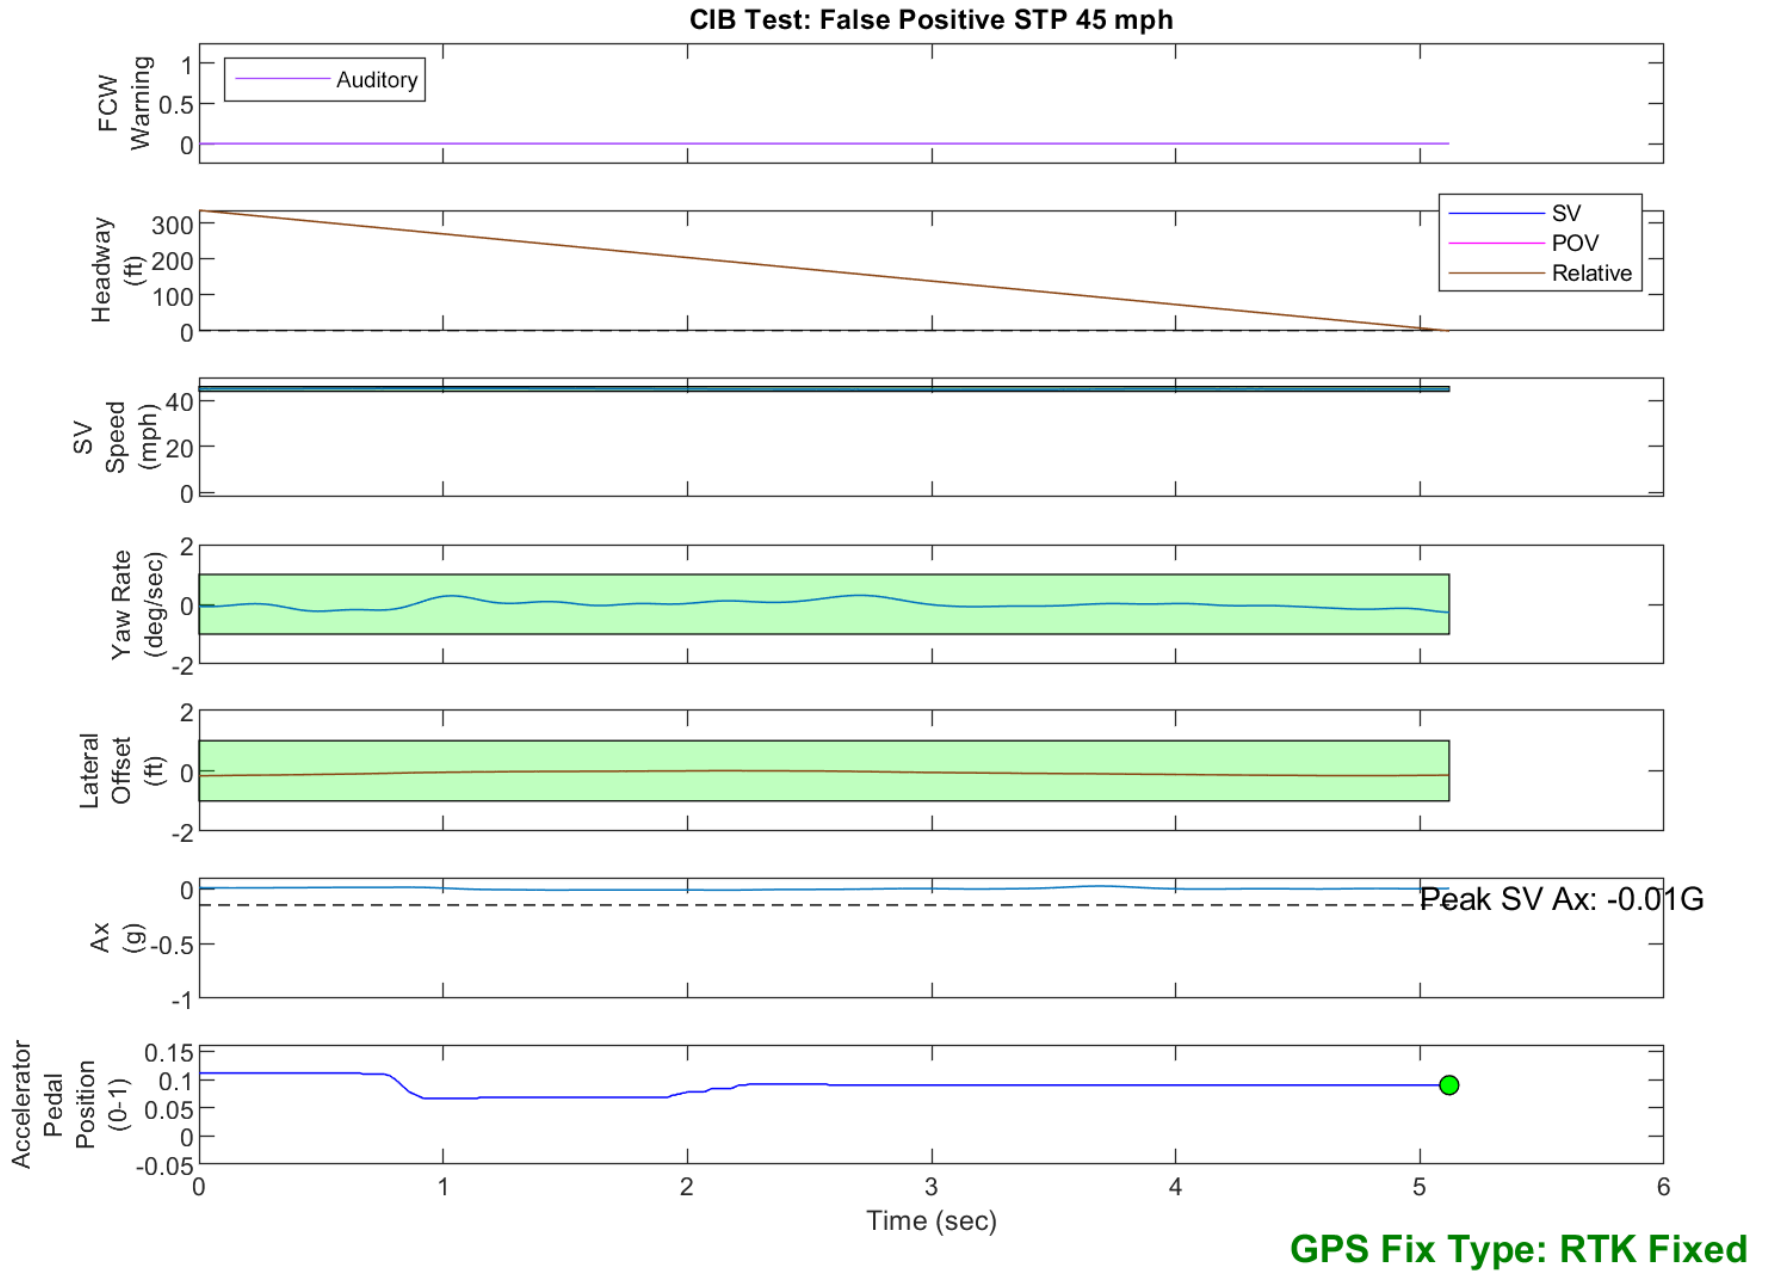


Figure D6. Example Time History for False Positive STP 45, Passing

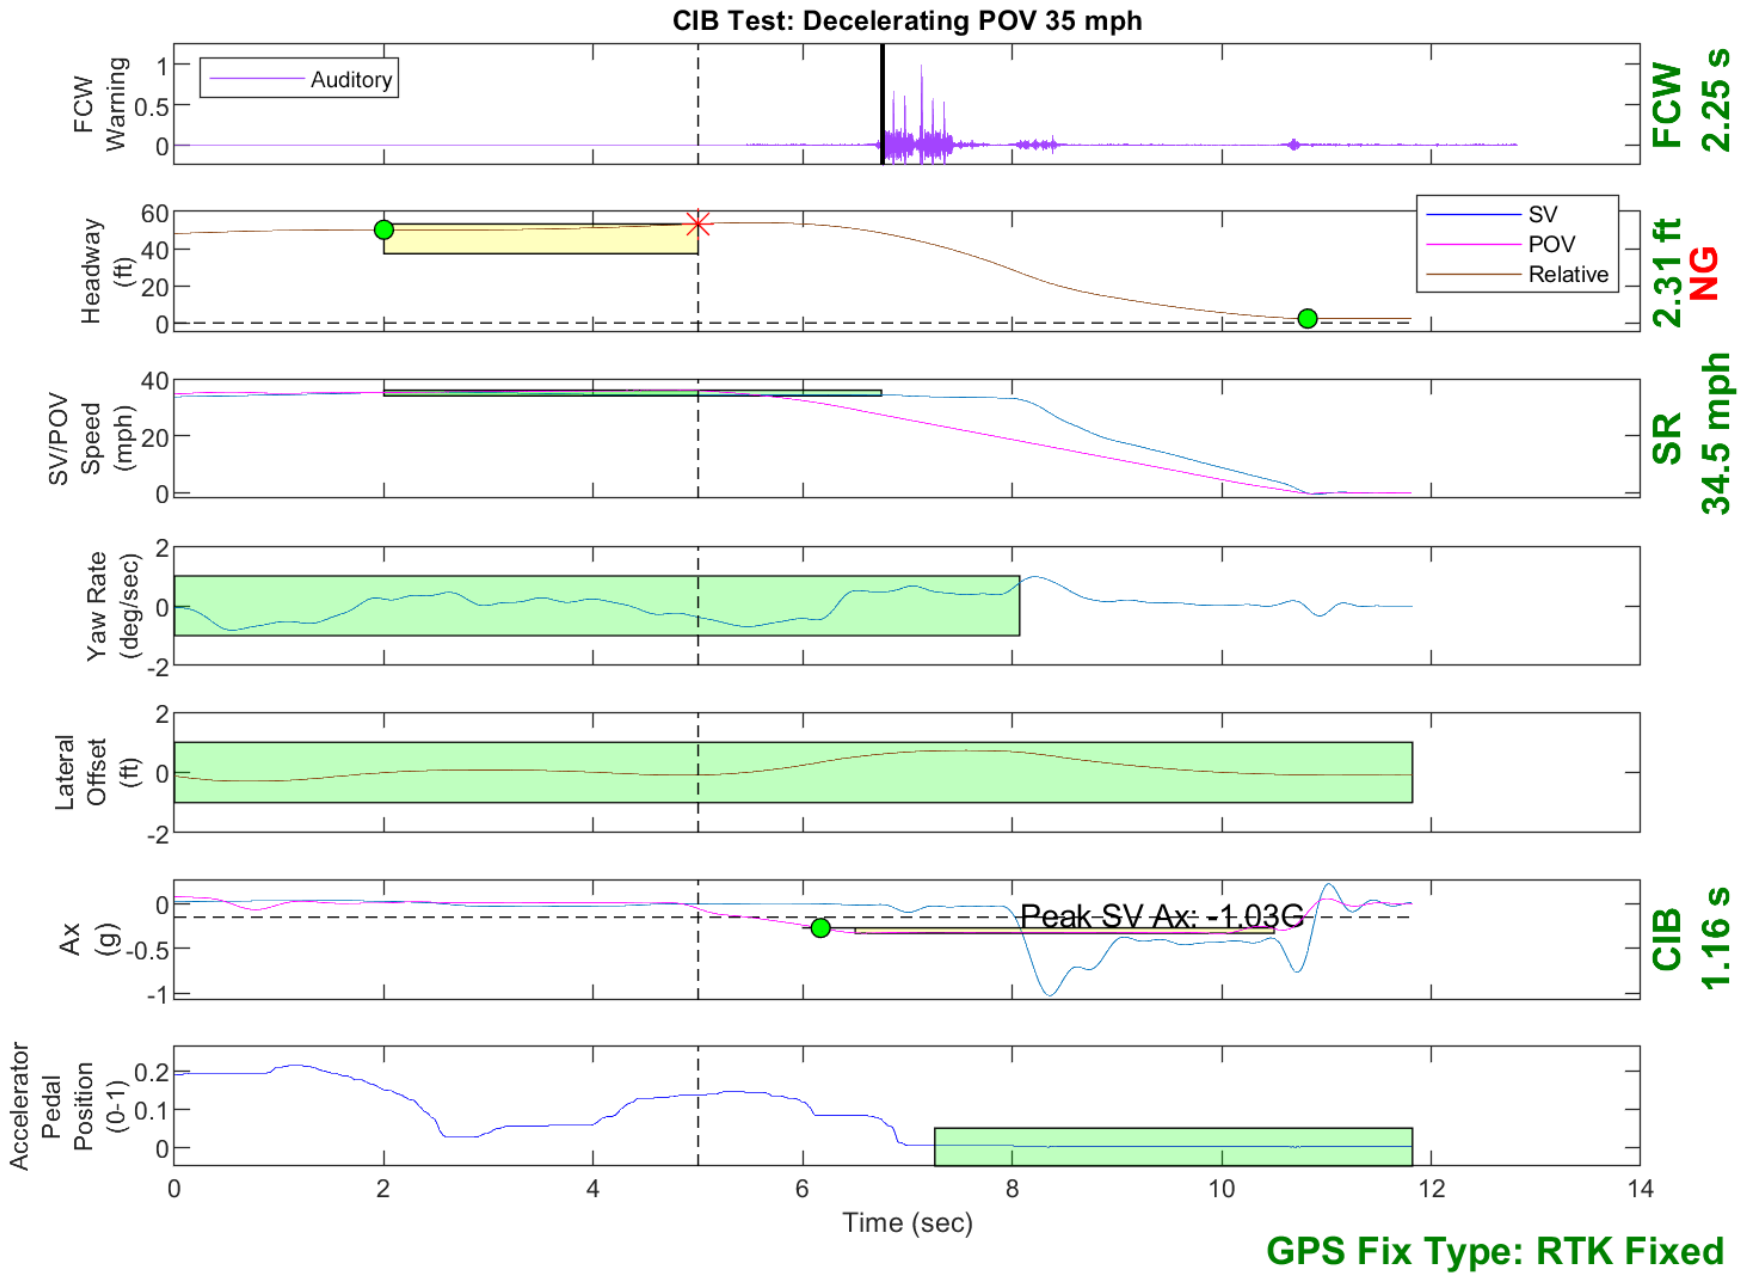


Figure D7. Example Time History Displaying Invalid Headway Criteria



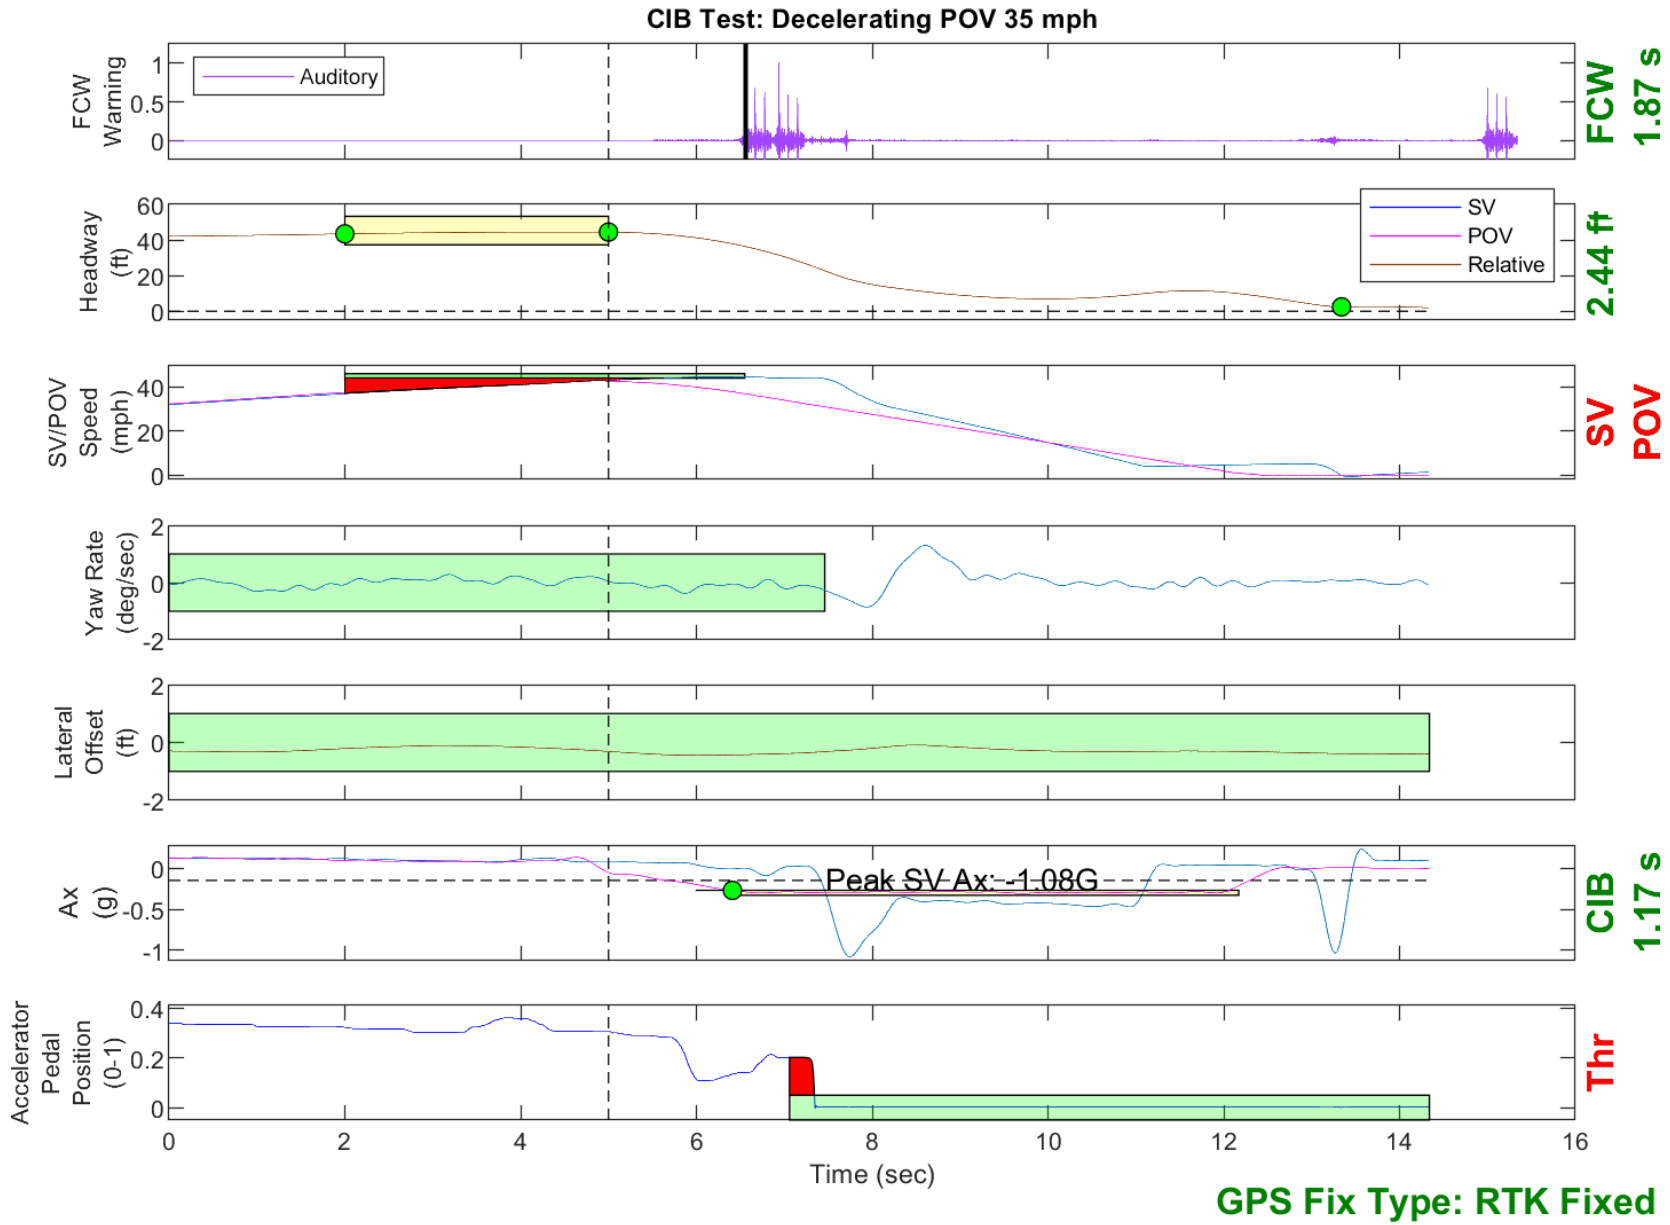


Figure D8. Example Time History Displaying Various Invalid Criteria

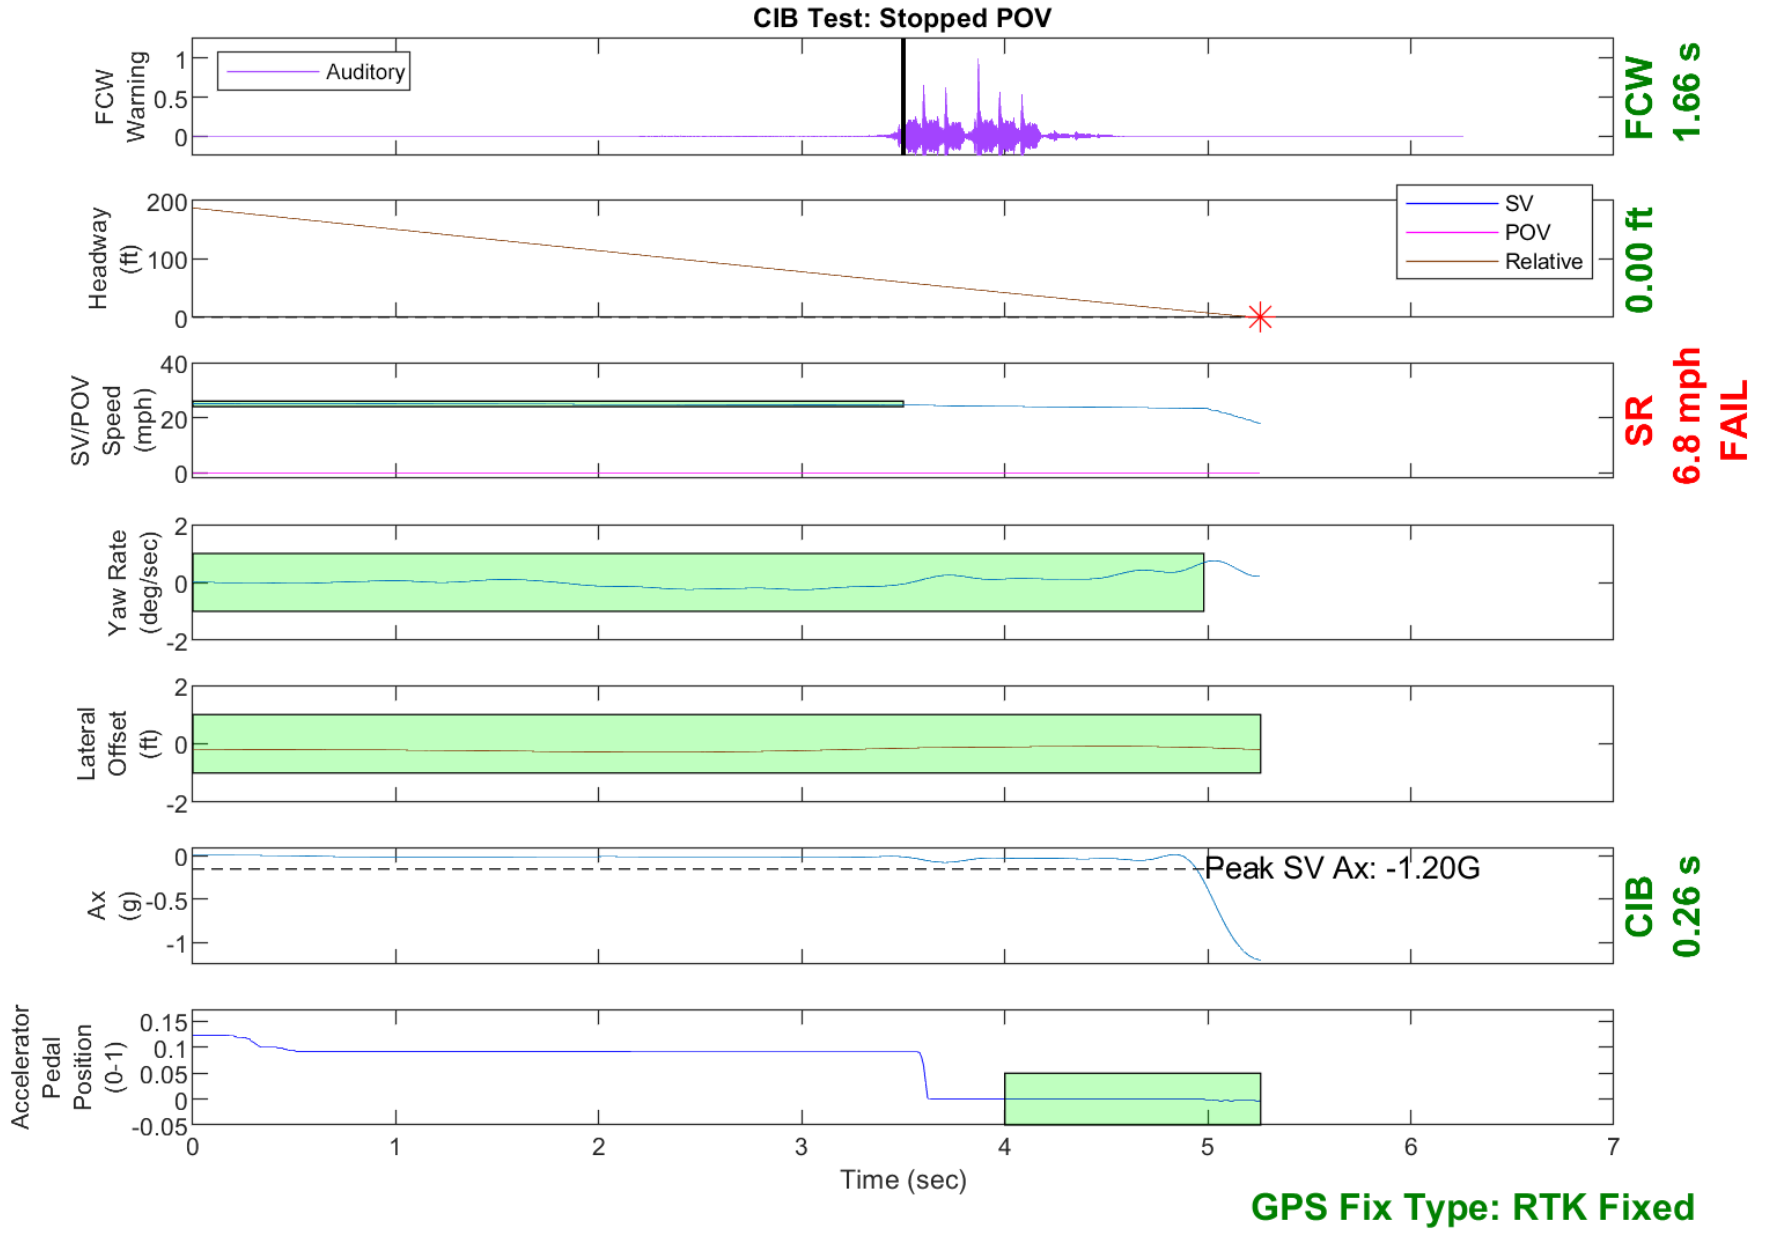


Figure D9. Example Time History for a Failed Run

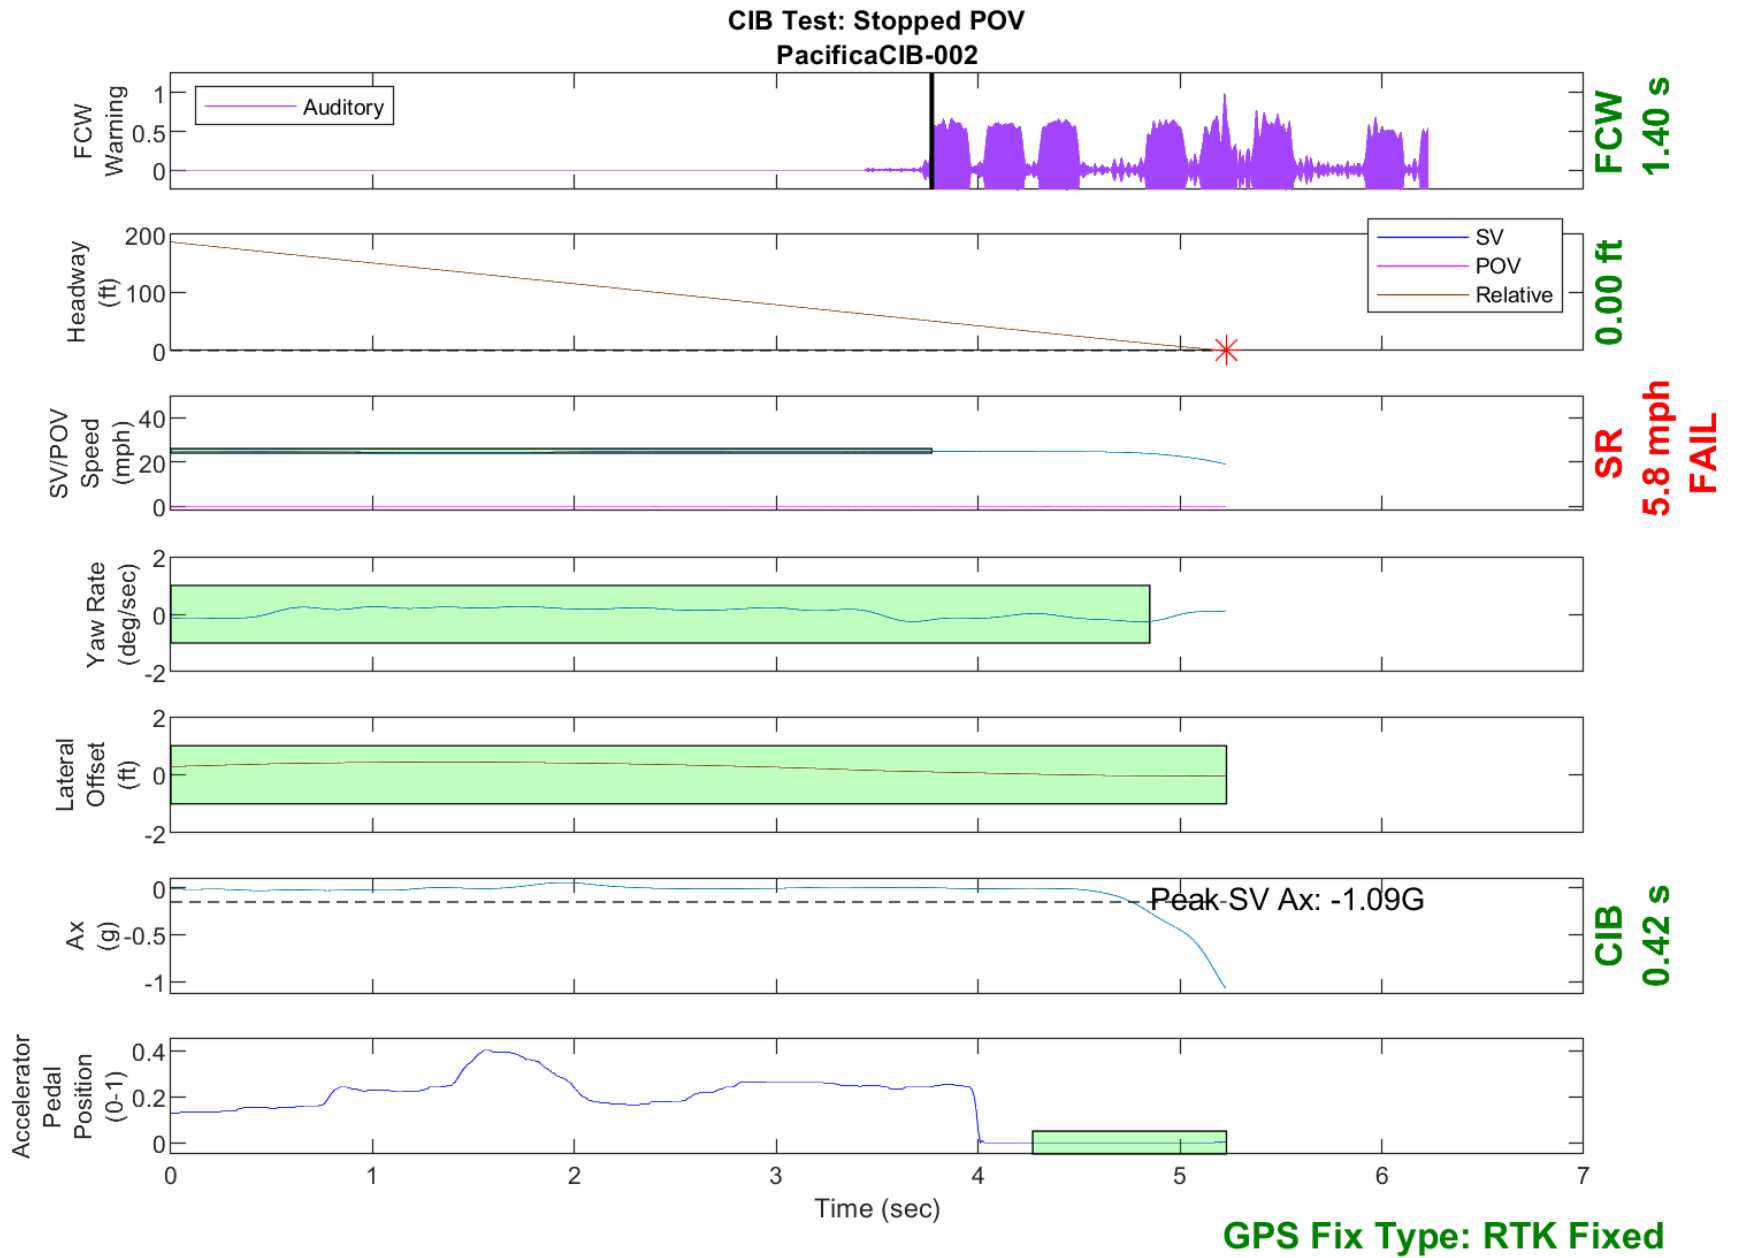


Figure D10. Time History for CIB Run 2, SV Encounters Stopped POV

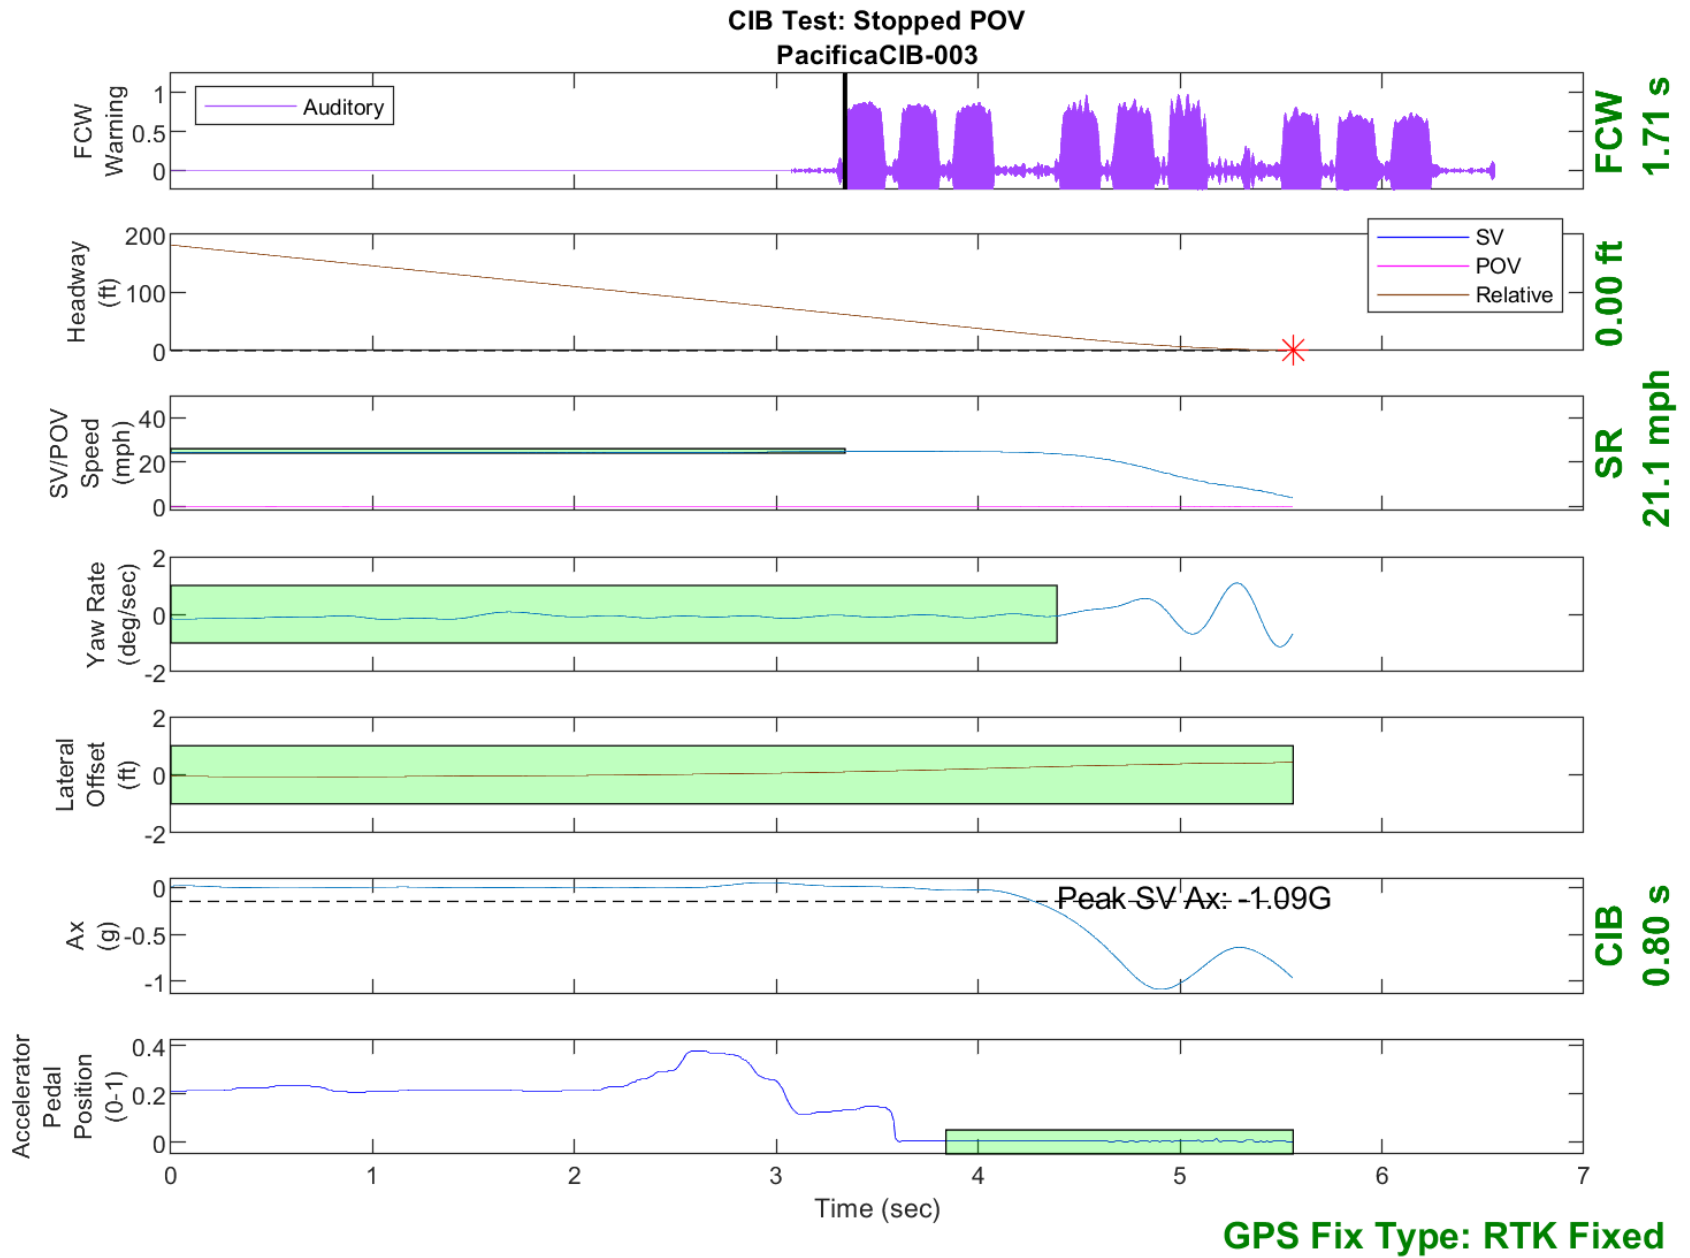


Figure D11. Time History for CIB Run 3, SV Encounters Stopped POV

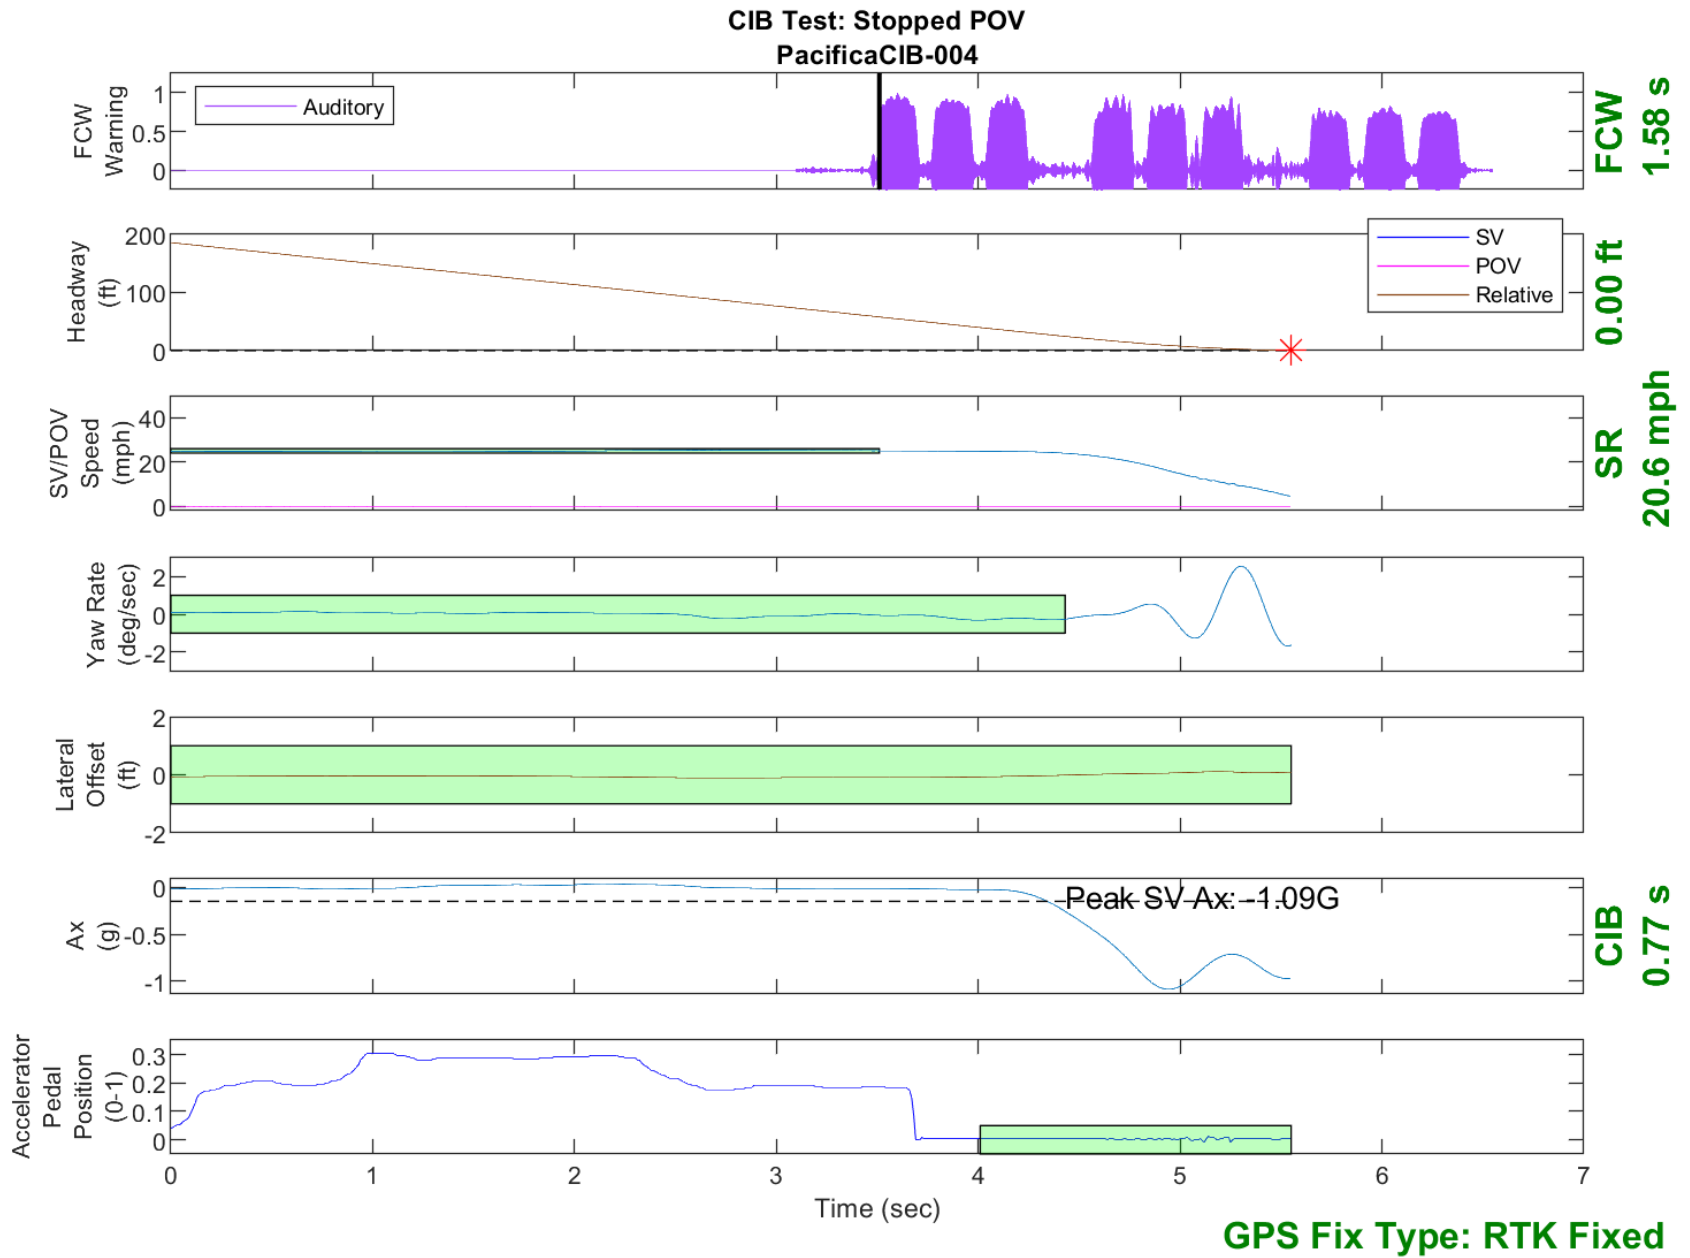


Figure D12. Time History for CIB Run 4, SV Encounters Stopped POV

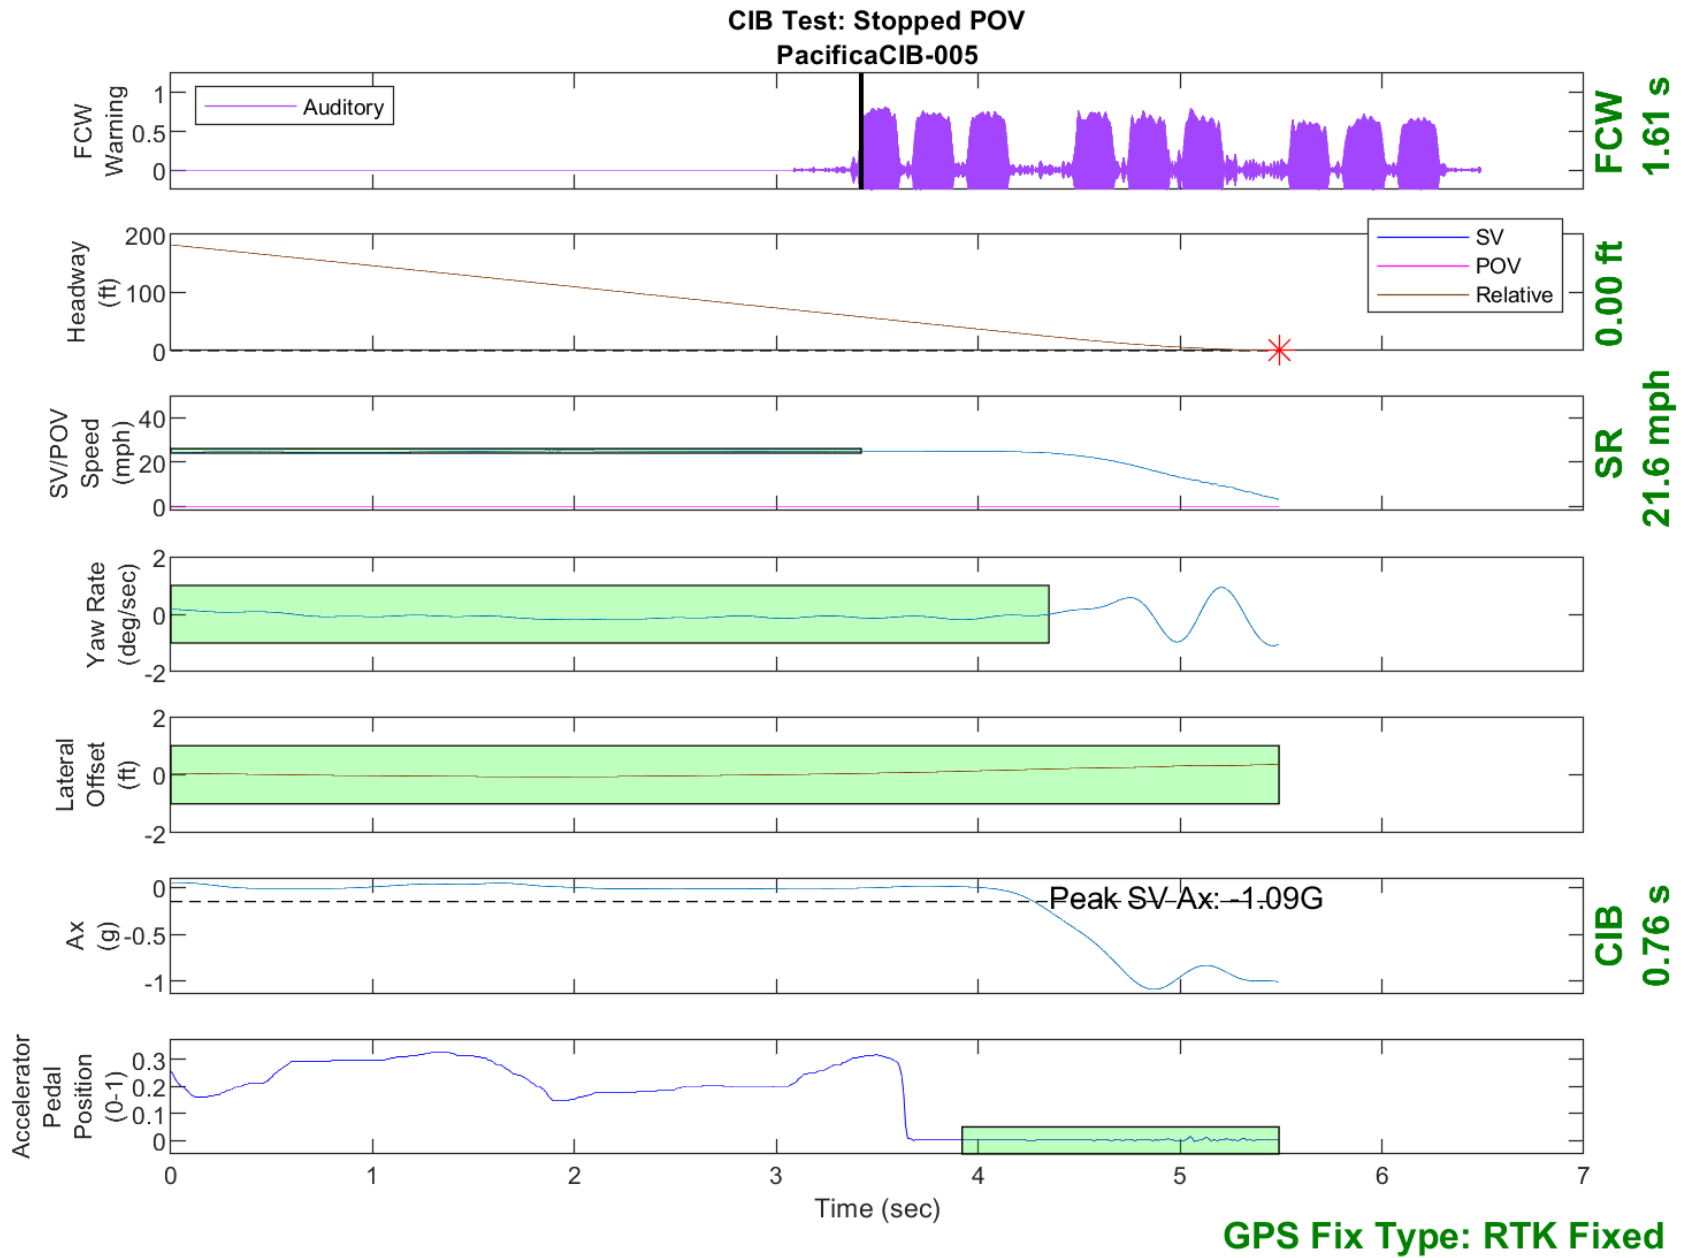


Figure D13. Time History for CIB Run 5, SV Encounters Stopped POV

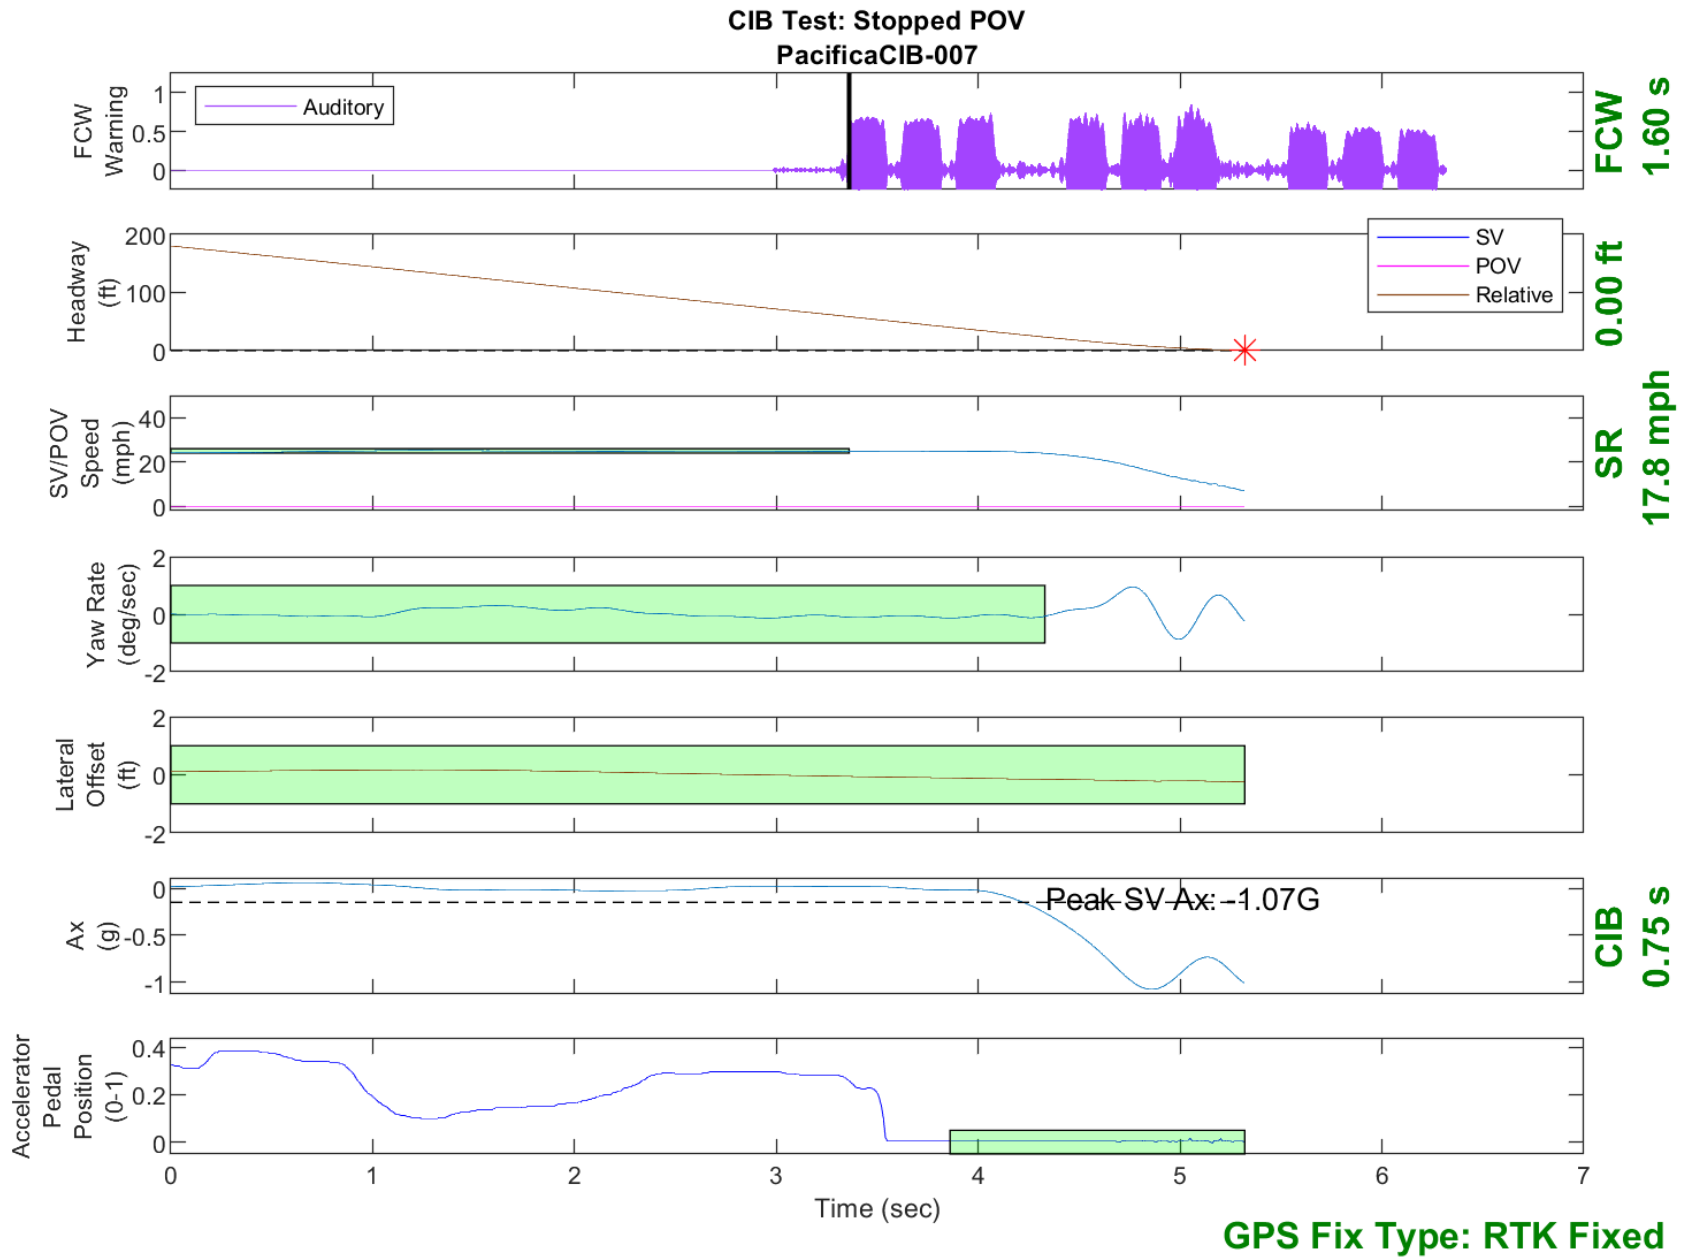


Figure D14. Time History for CIB Run 7, SV Encounters Stopped POV

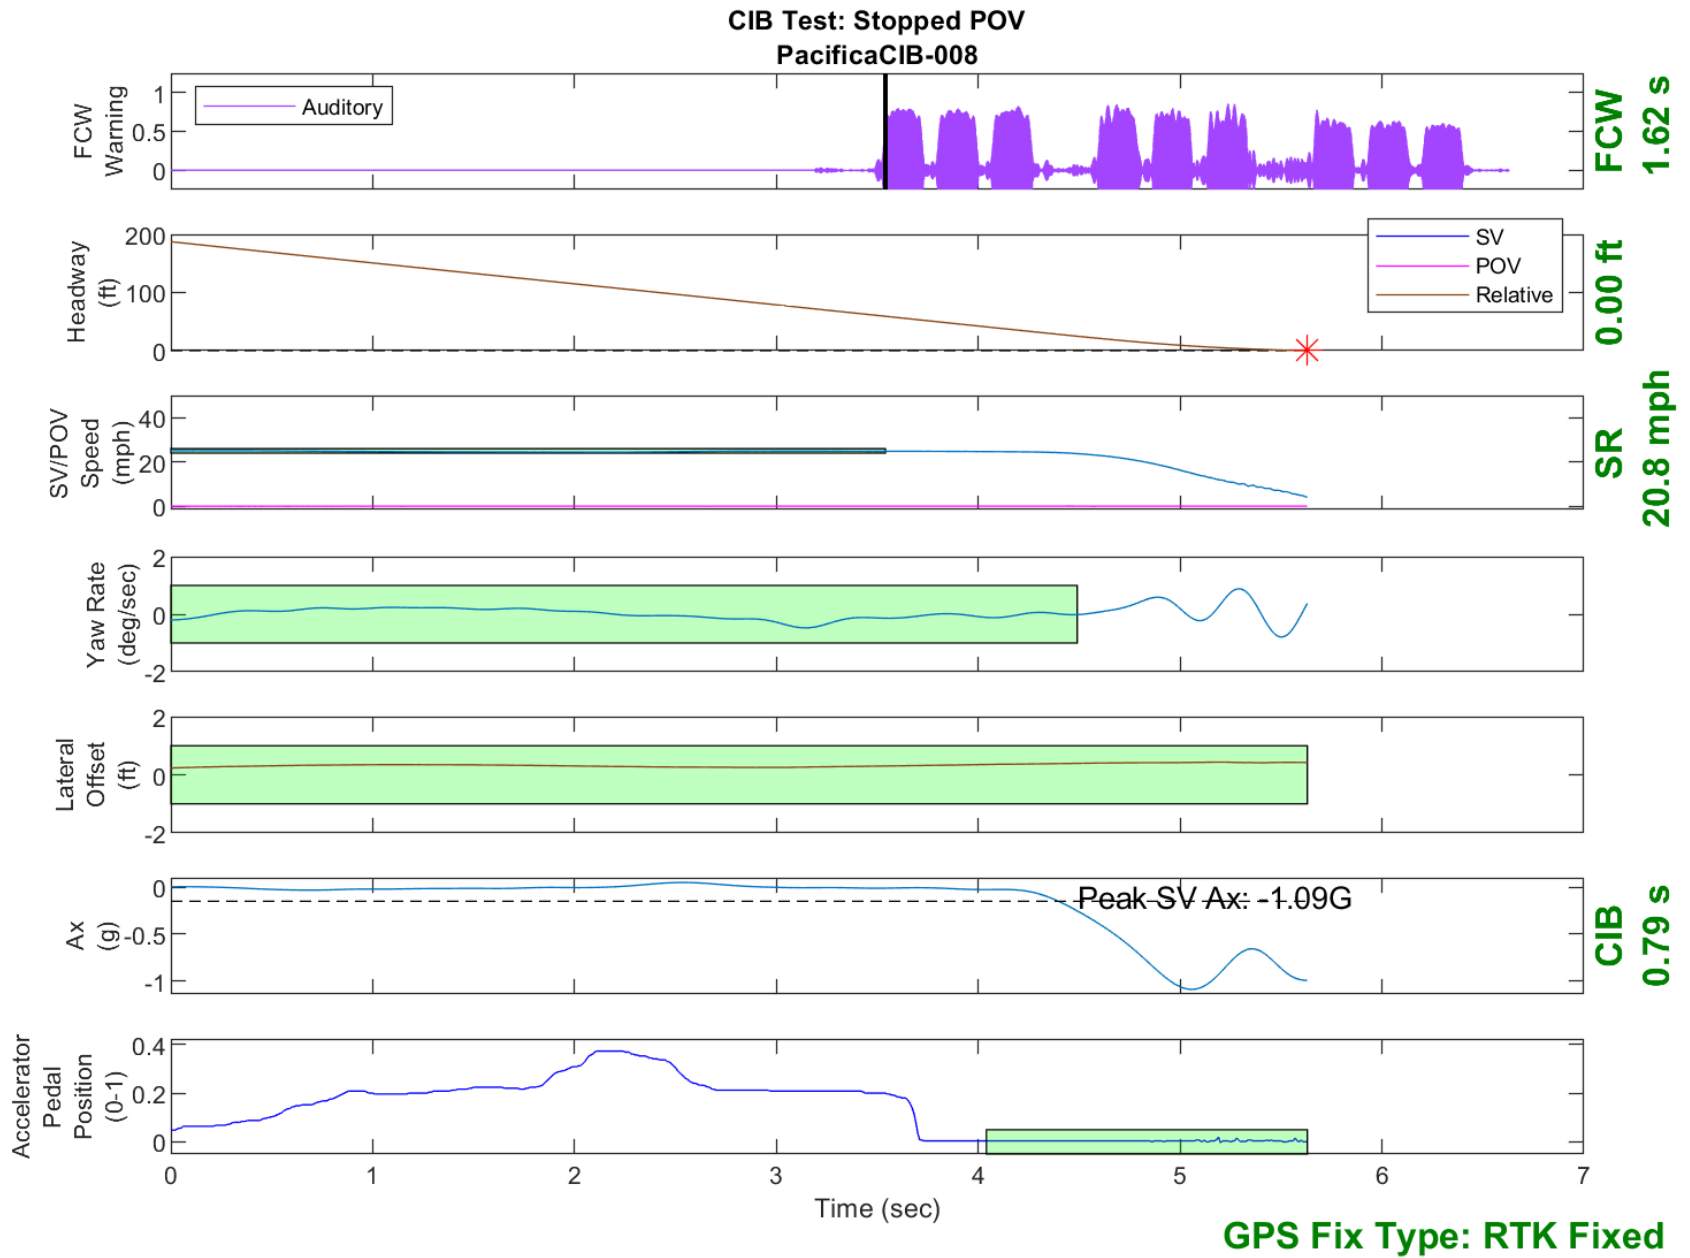


Figure D15. Time History for CIB Run 8, SV Encounters Stopped POV



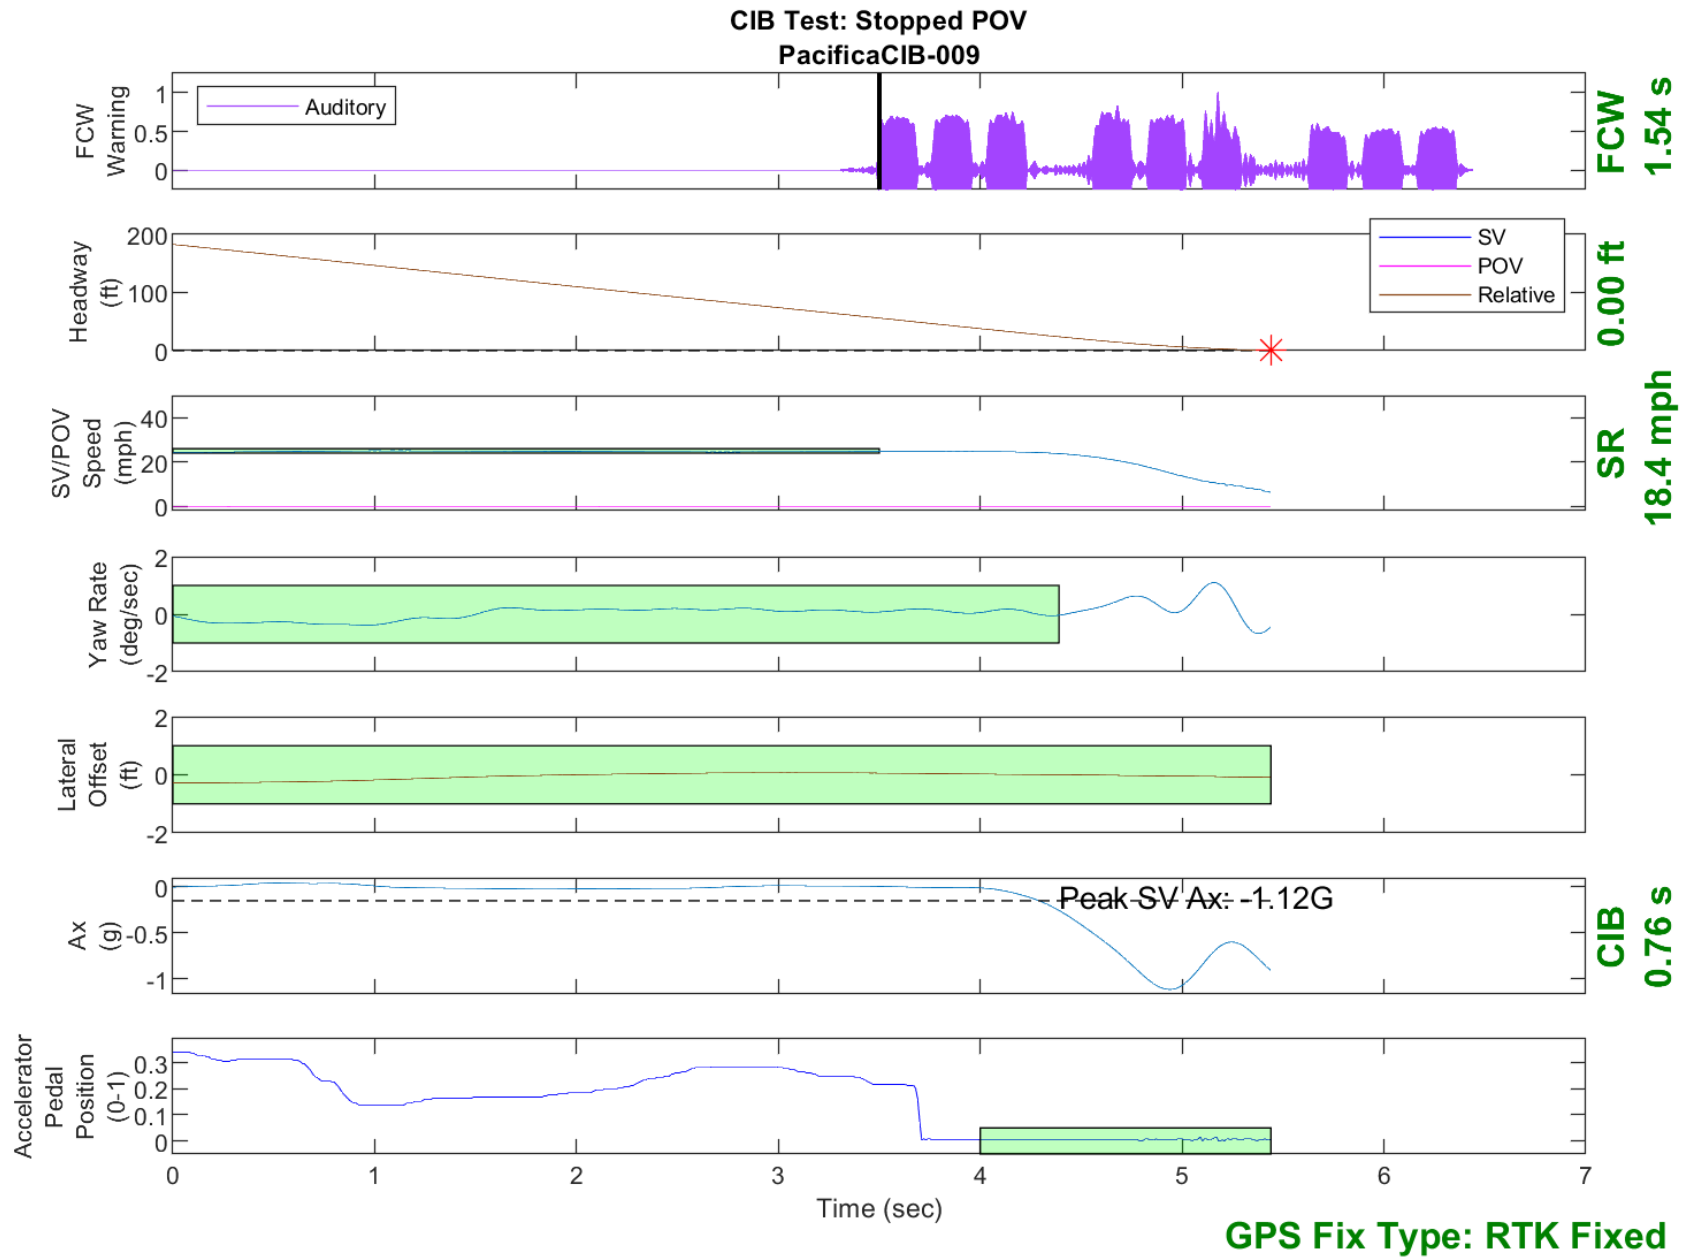


Figure D16. Time History for CIB Run 9, SV Encounters Stopped POV

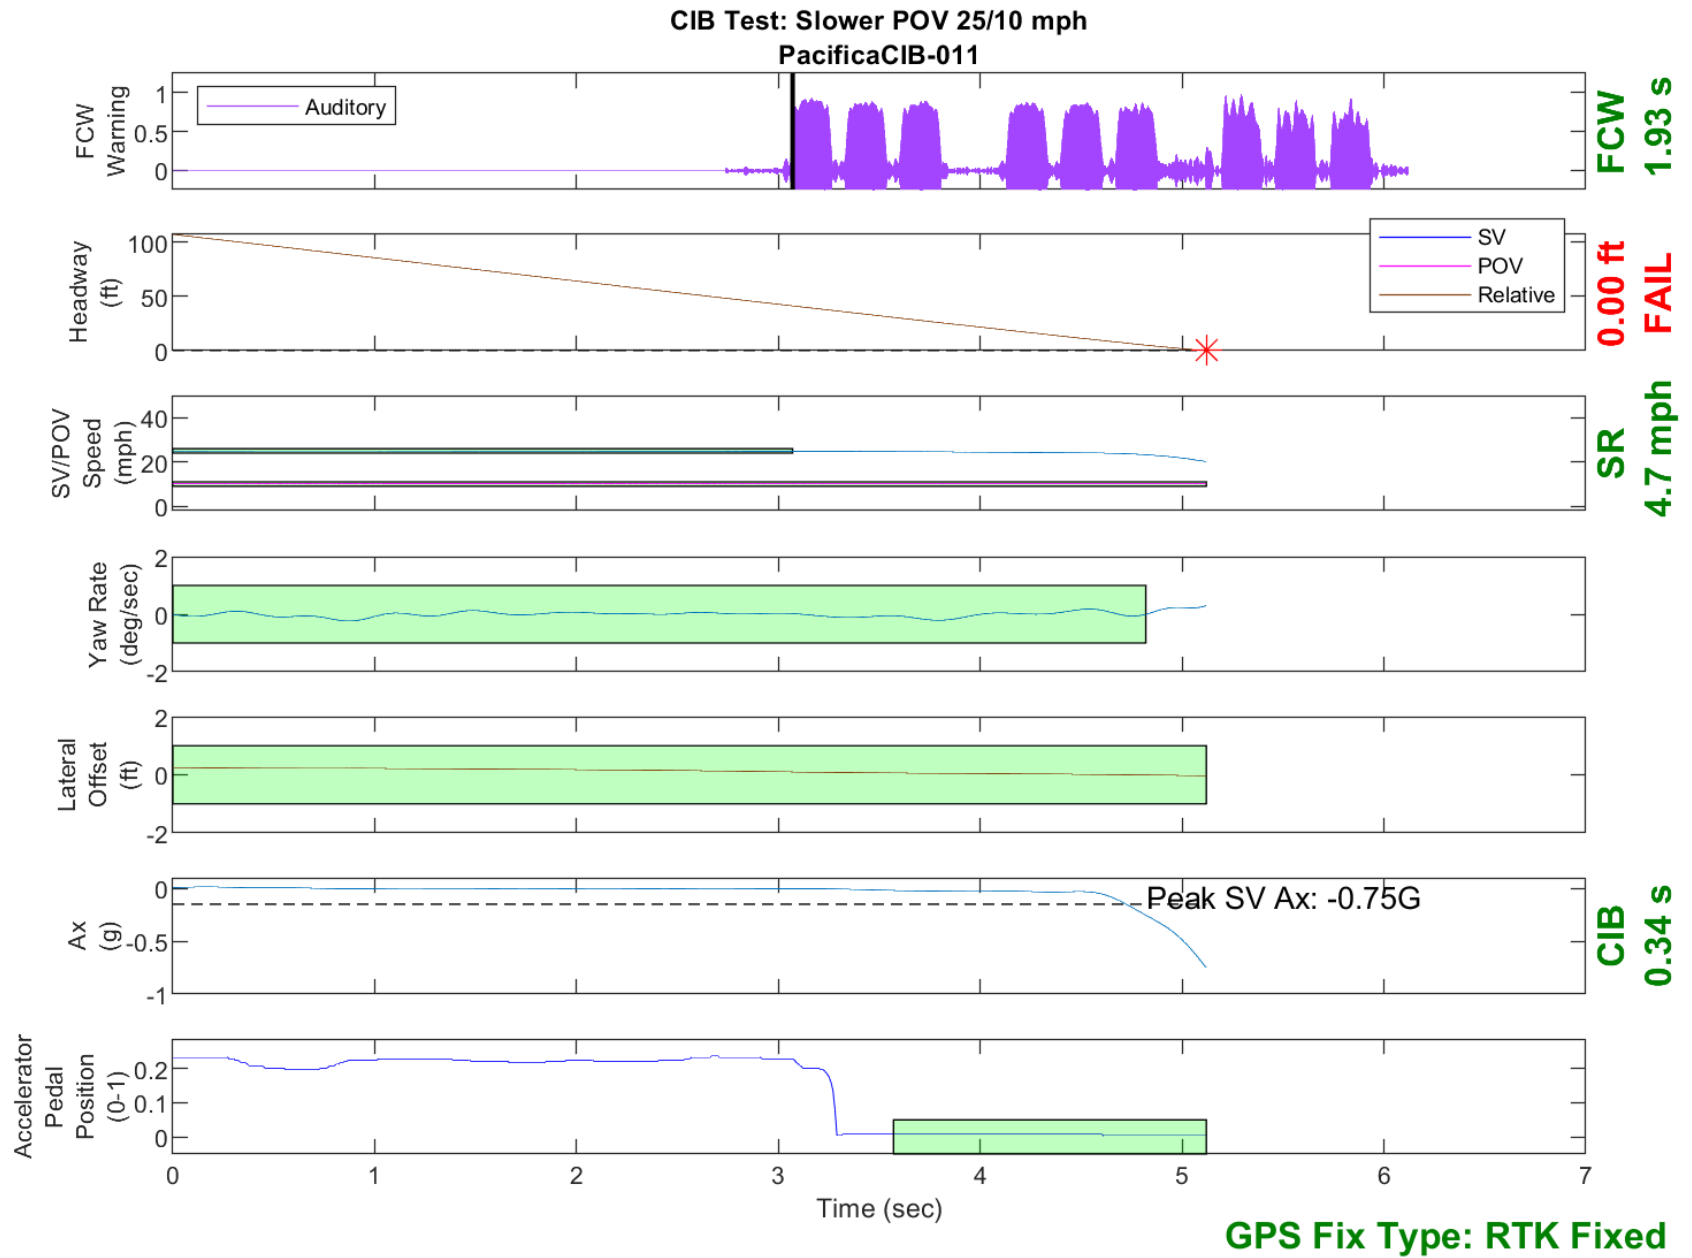


Figure D17. Time History for CIB Run 11, SV Encounters Slower POV, SV 25 mph, POV 10 mph

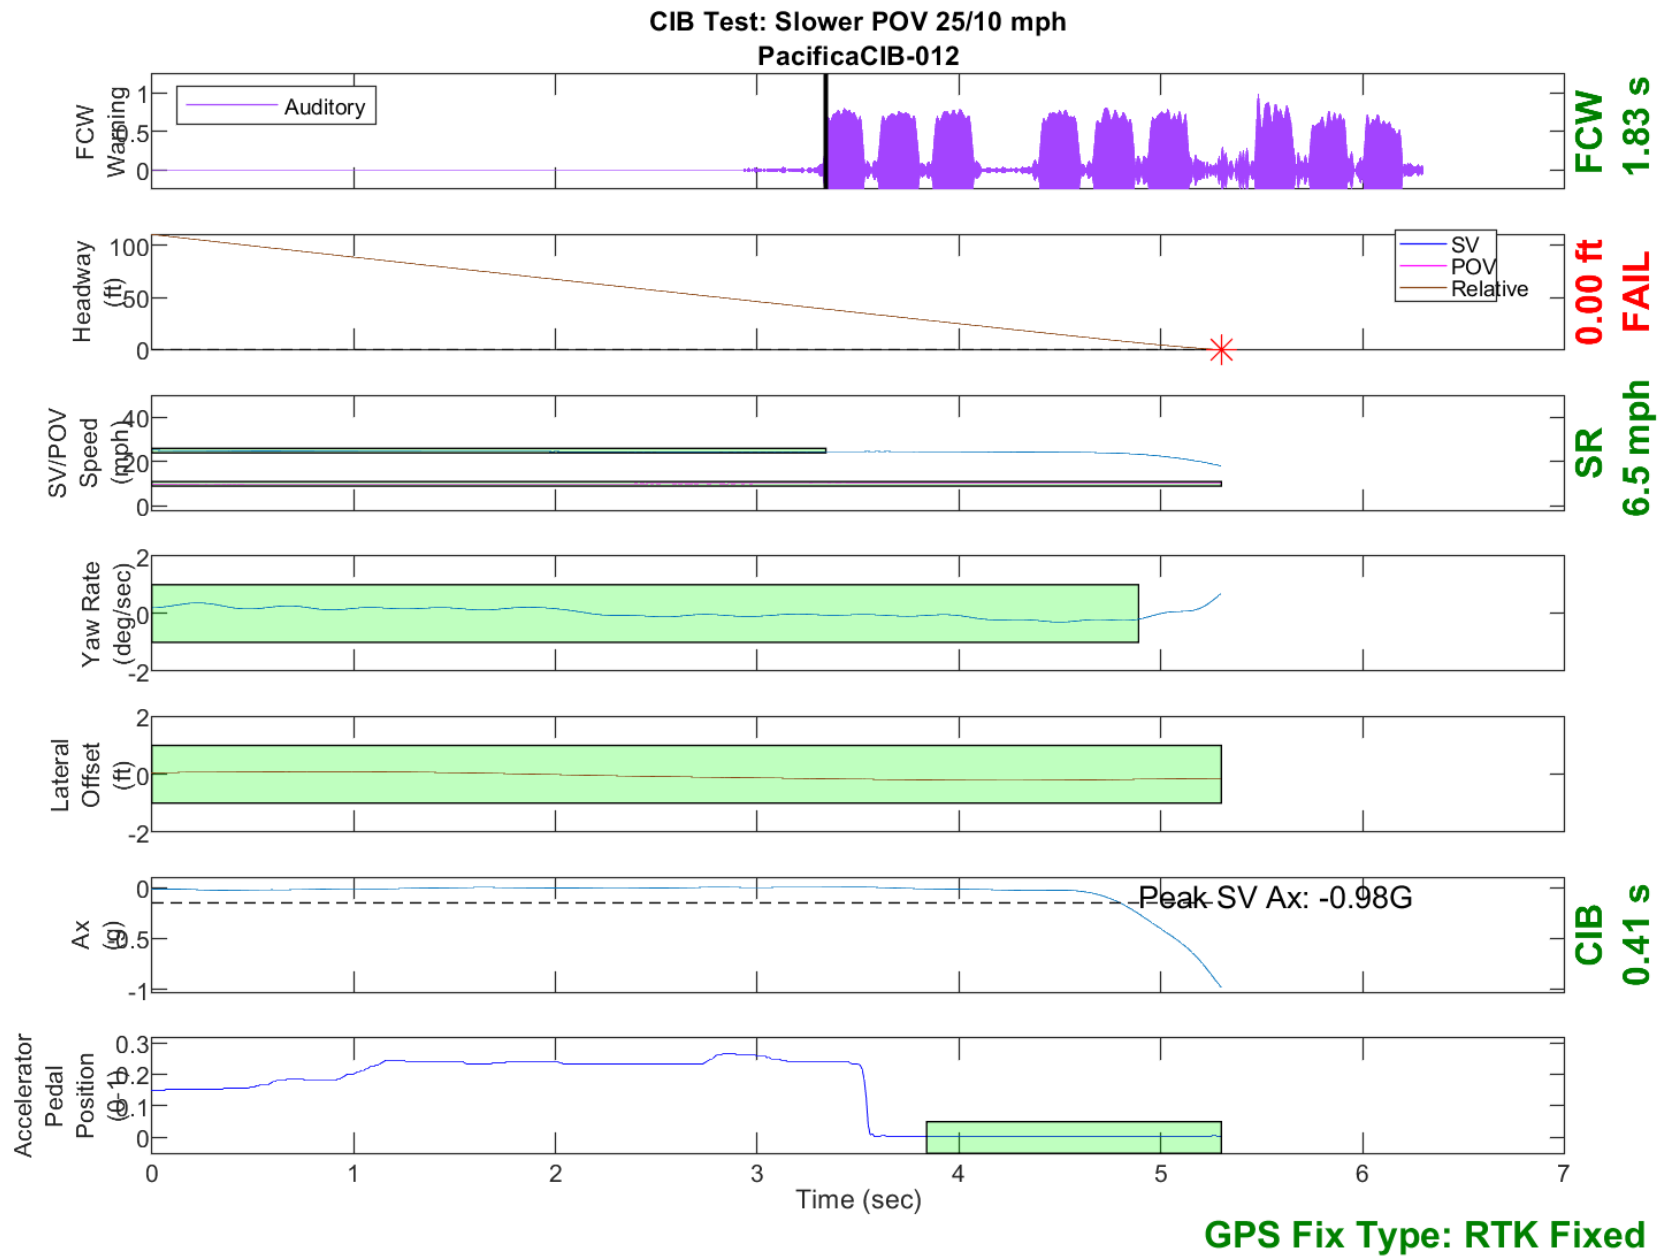


Figure D18. Time History for CIB Run 12, SV Encounters Slower POV, SV 25 mph, POV 10 mph

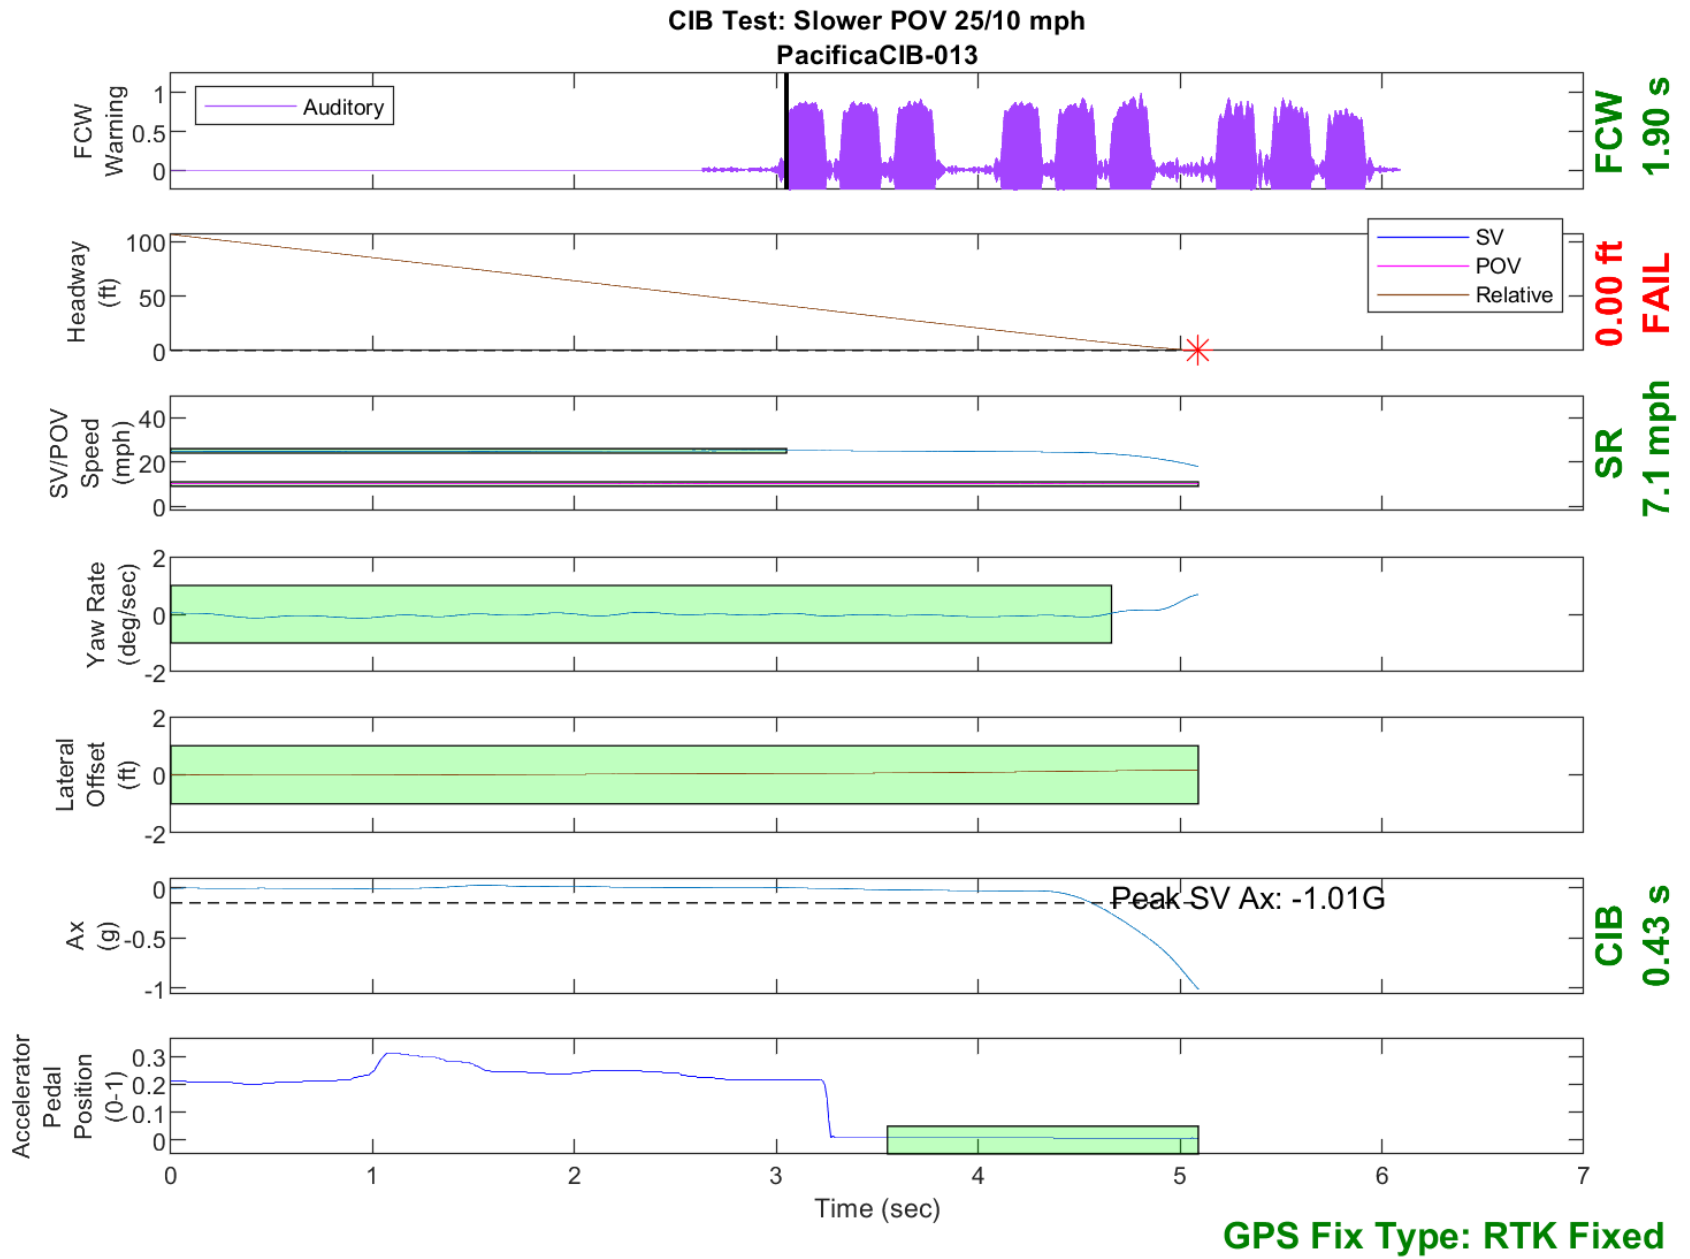


Figure D19. Time History for CIB Run 13, SV Encounters Slower POV, SV 25 mph, POV 10 mph

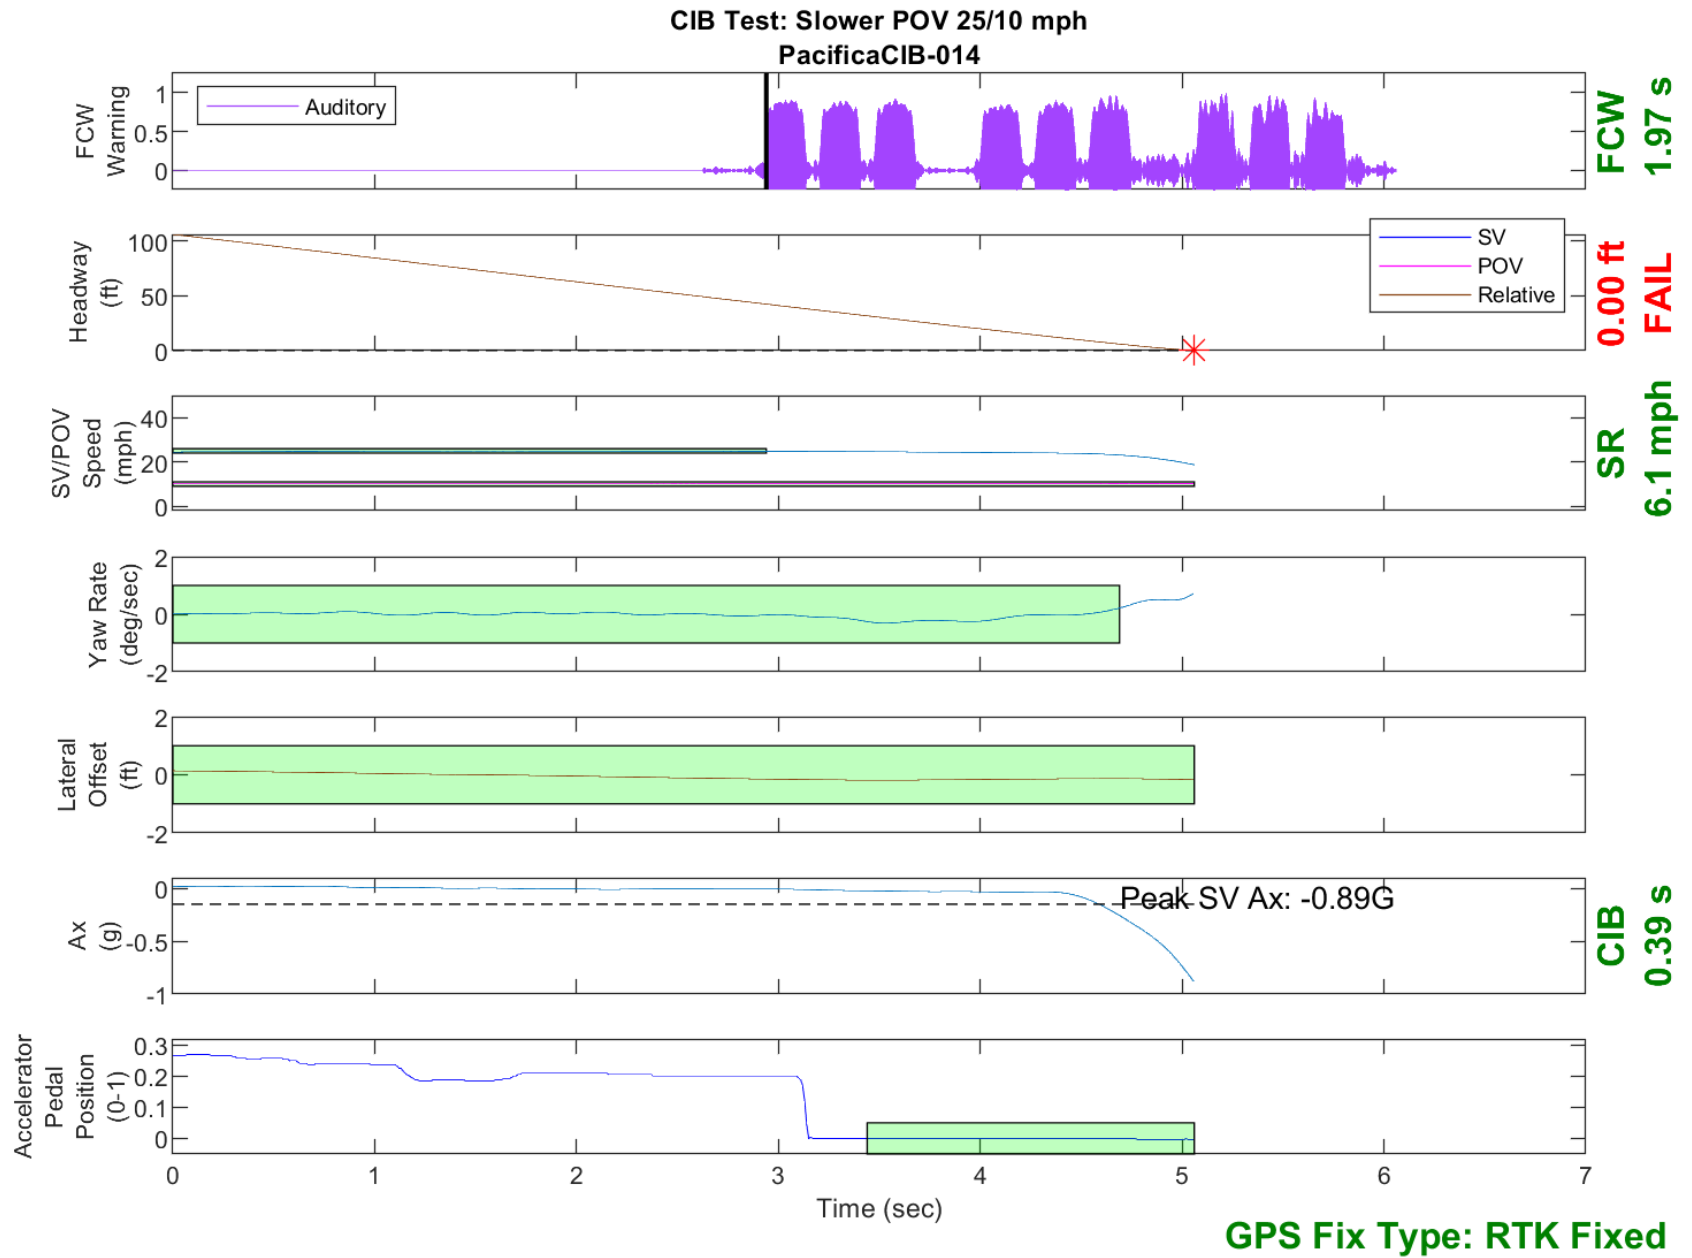


Figure D20. Time History for CIB Run 14, SV Encounters Slower POV, SV 25 mph, POV 10 mph

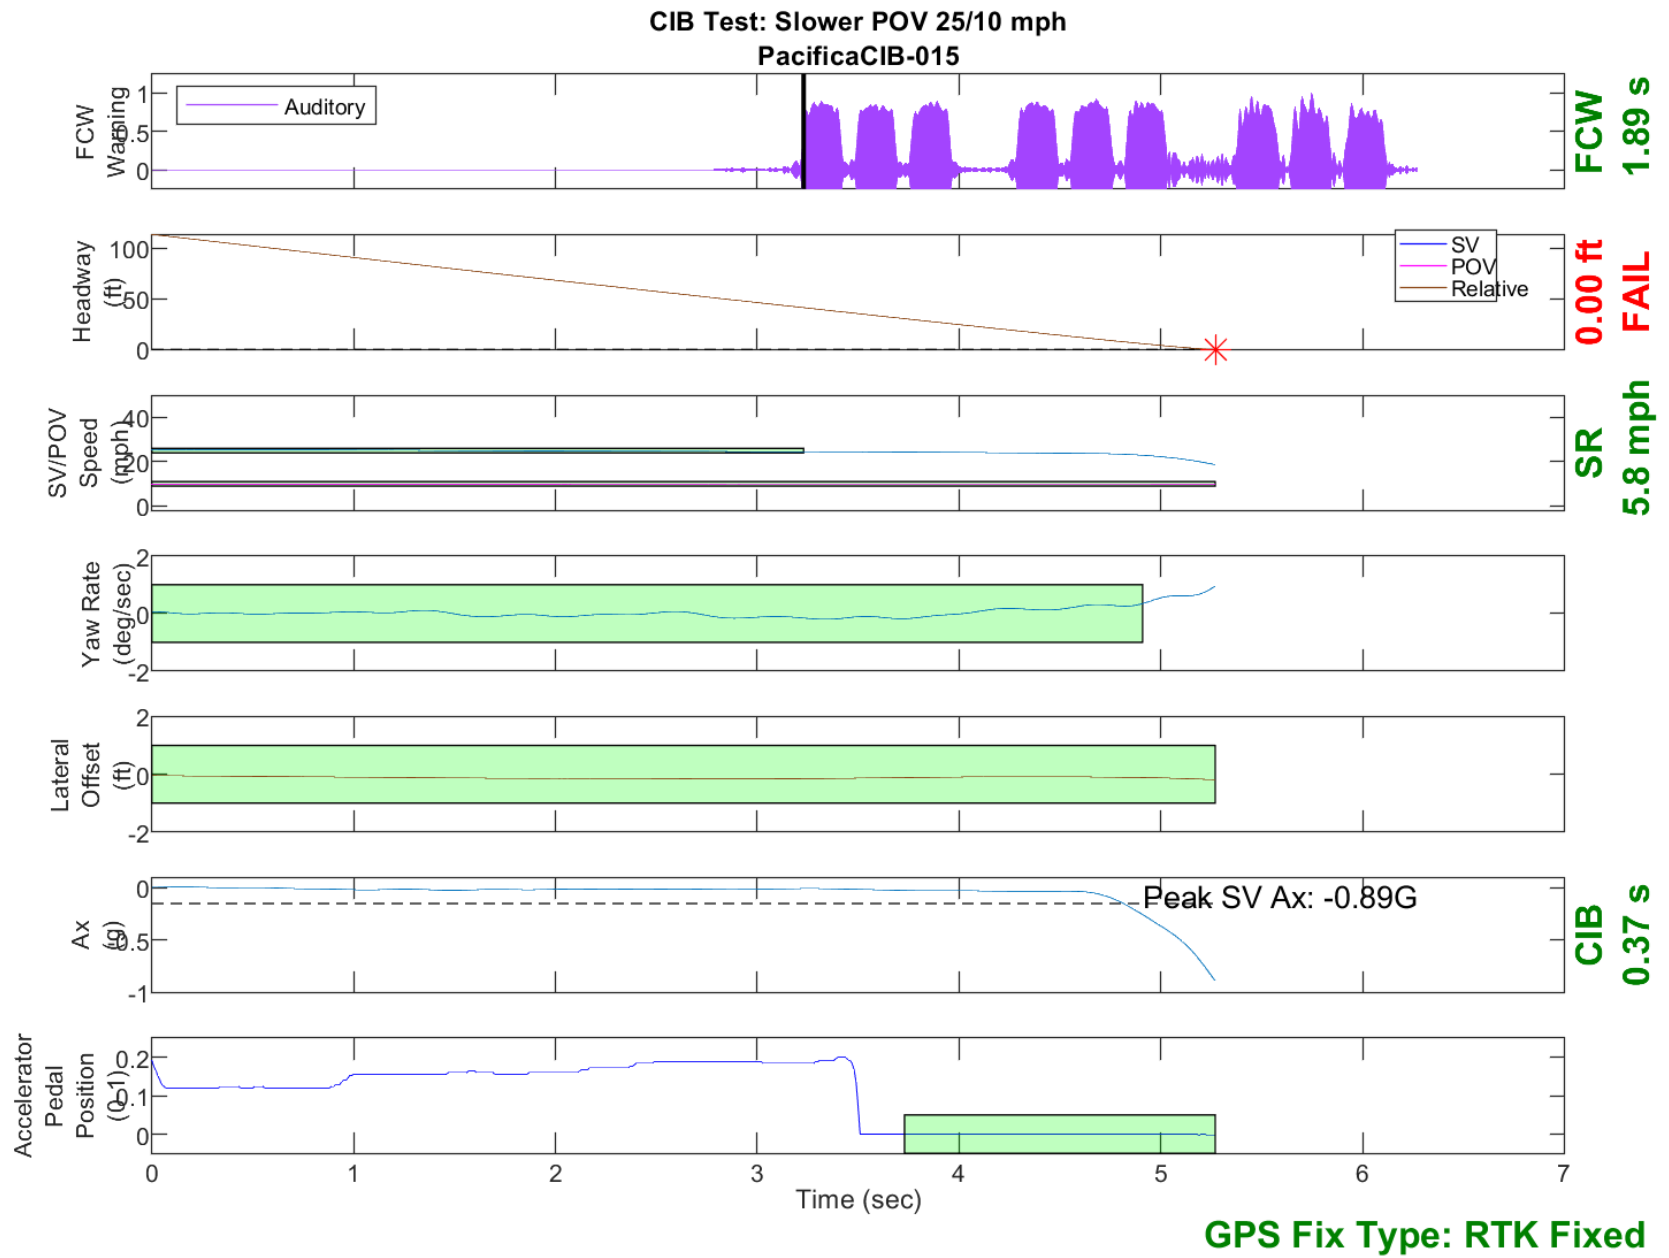


Figure D21. Time History for CIB Run 15, SV Encounters Slower POV, SV 25 mph, POV 10 mph

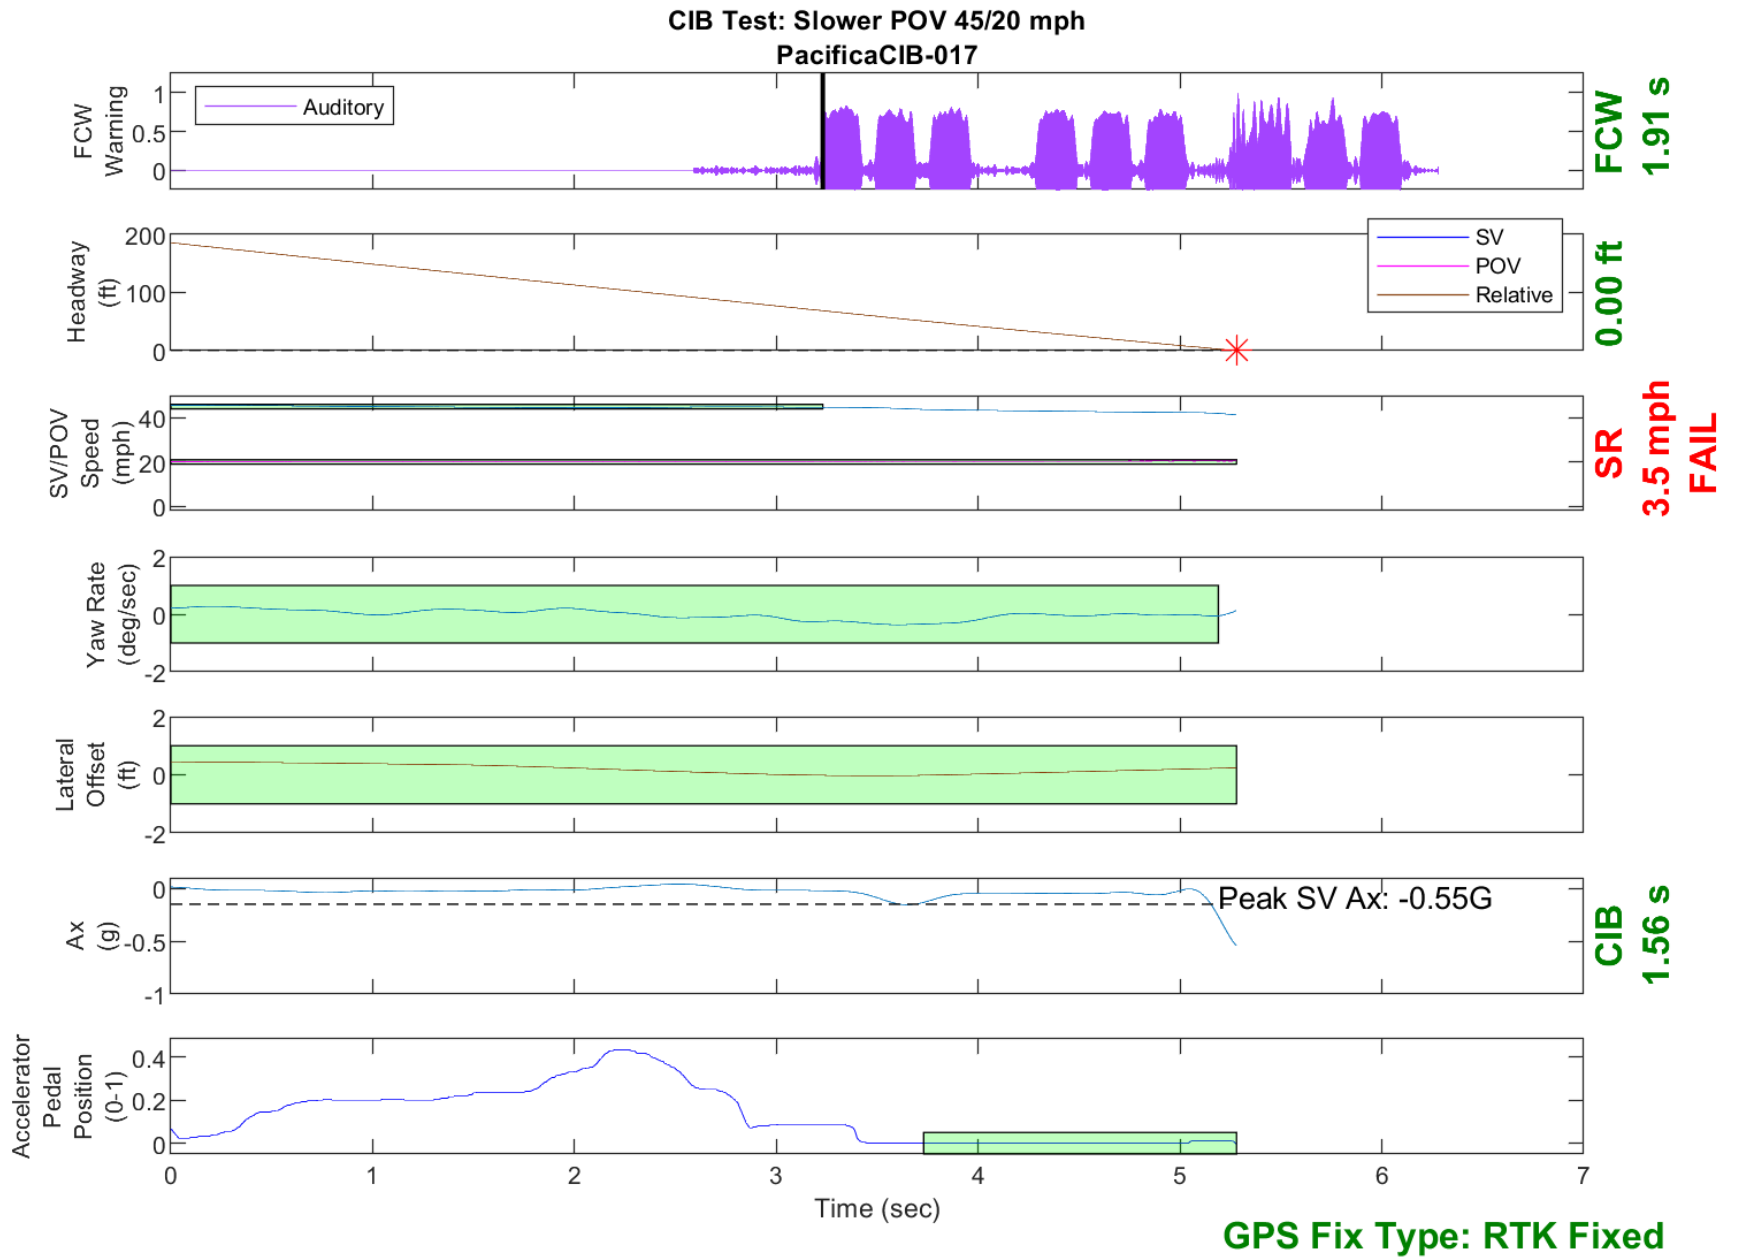


Figure D22. Time History for CIB Run 17, SV Encounters Slower POV, SV 45 mph, POV 20 mph

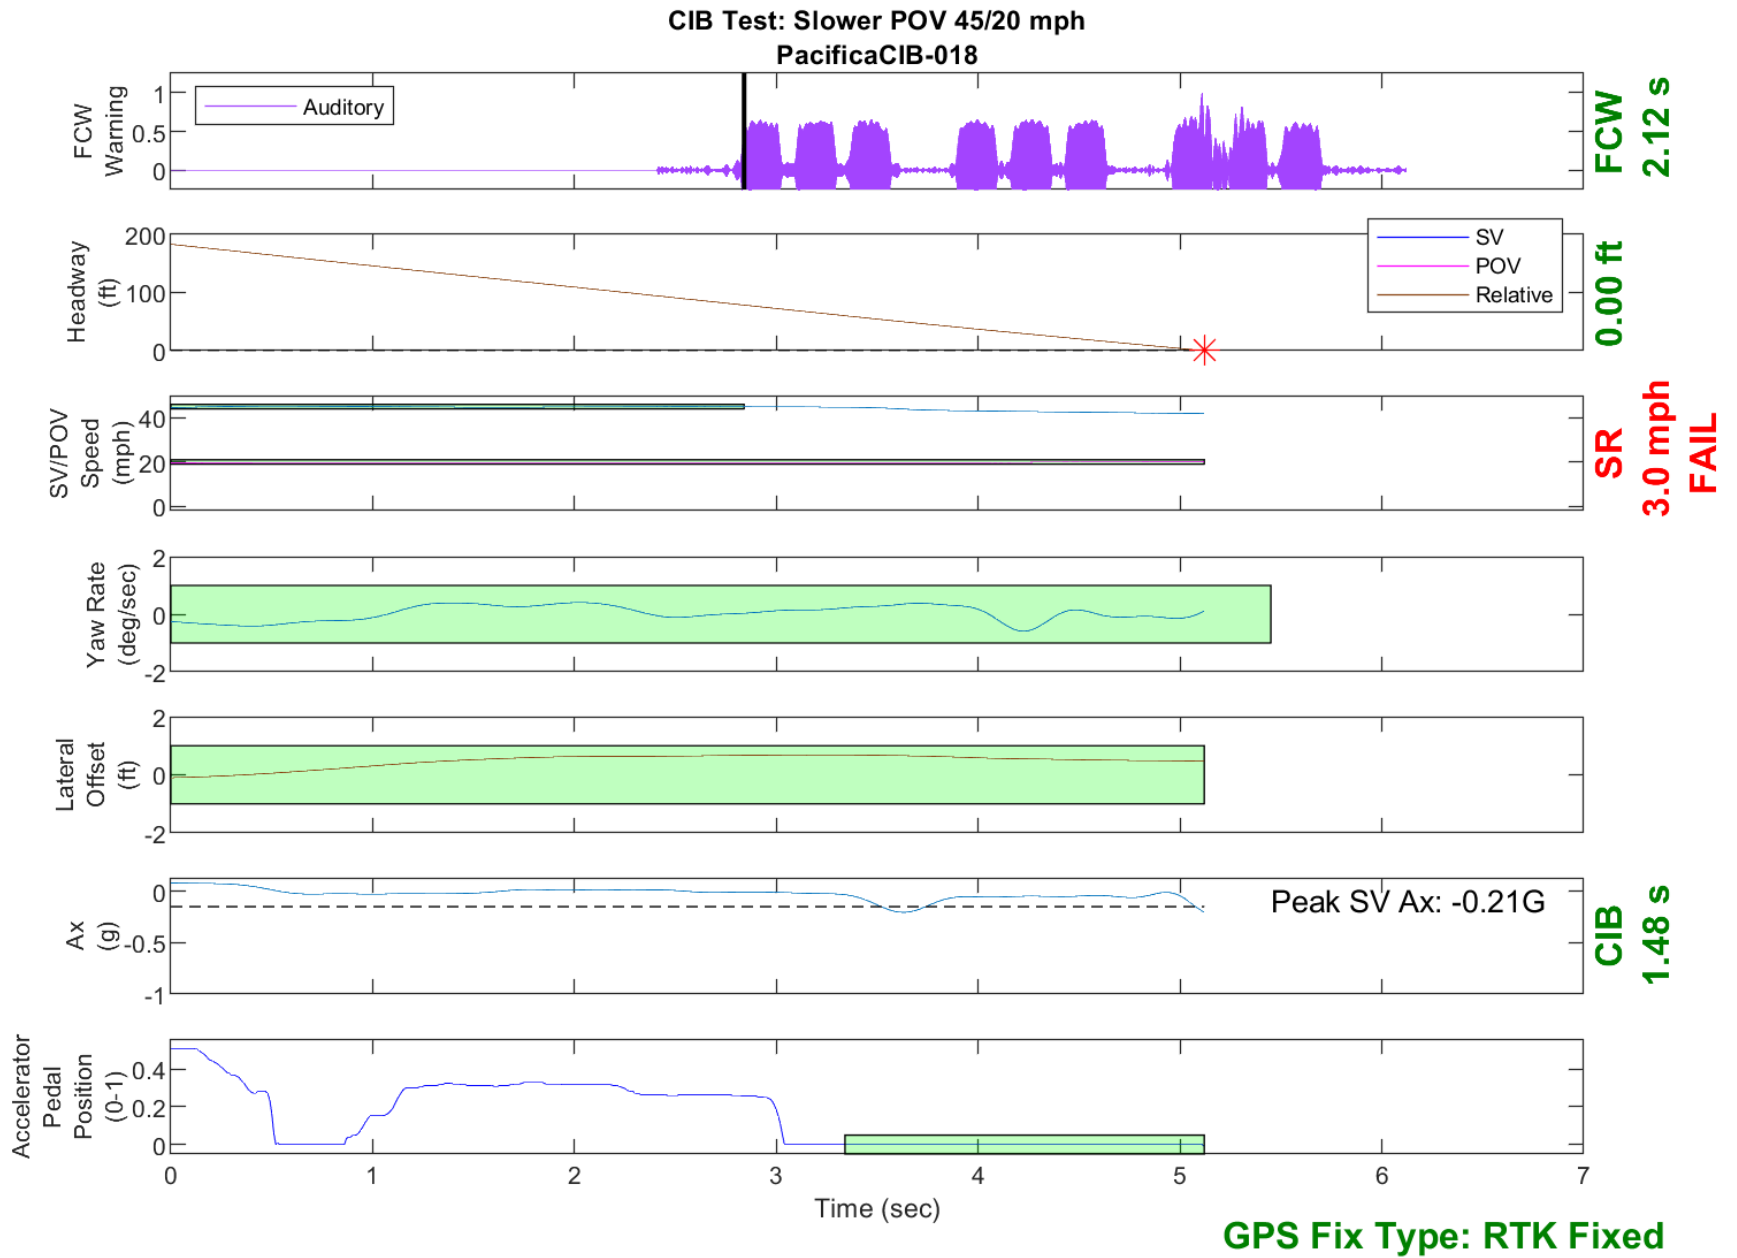


Figure D23. Time History for CIB Run 18, SV Encounters Slower POV, SV 45 mph, POV 20 mph



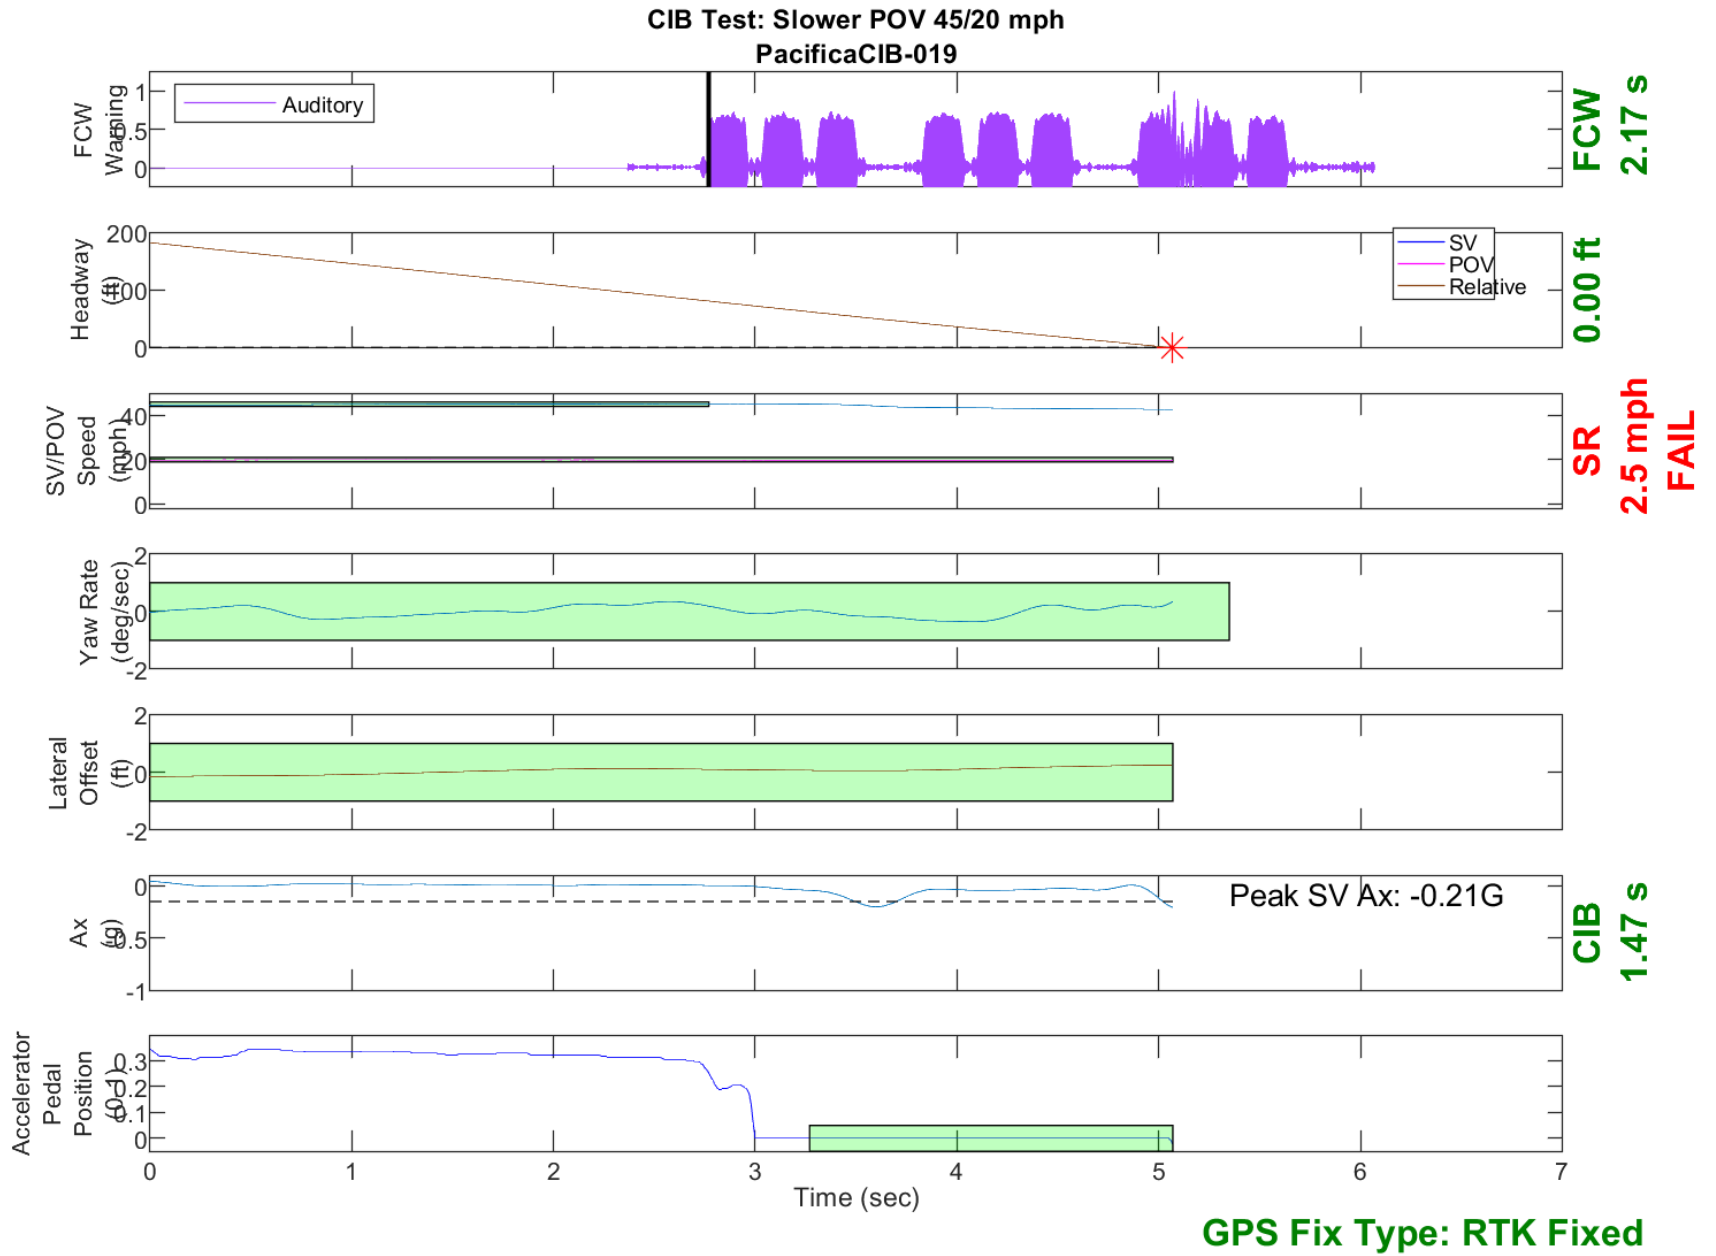


Figure D24. Time History for CIB Run 19, SV Encounters Slower POV, SV 45 mph, POV 20 mph

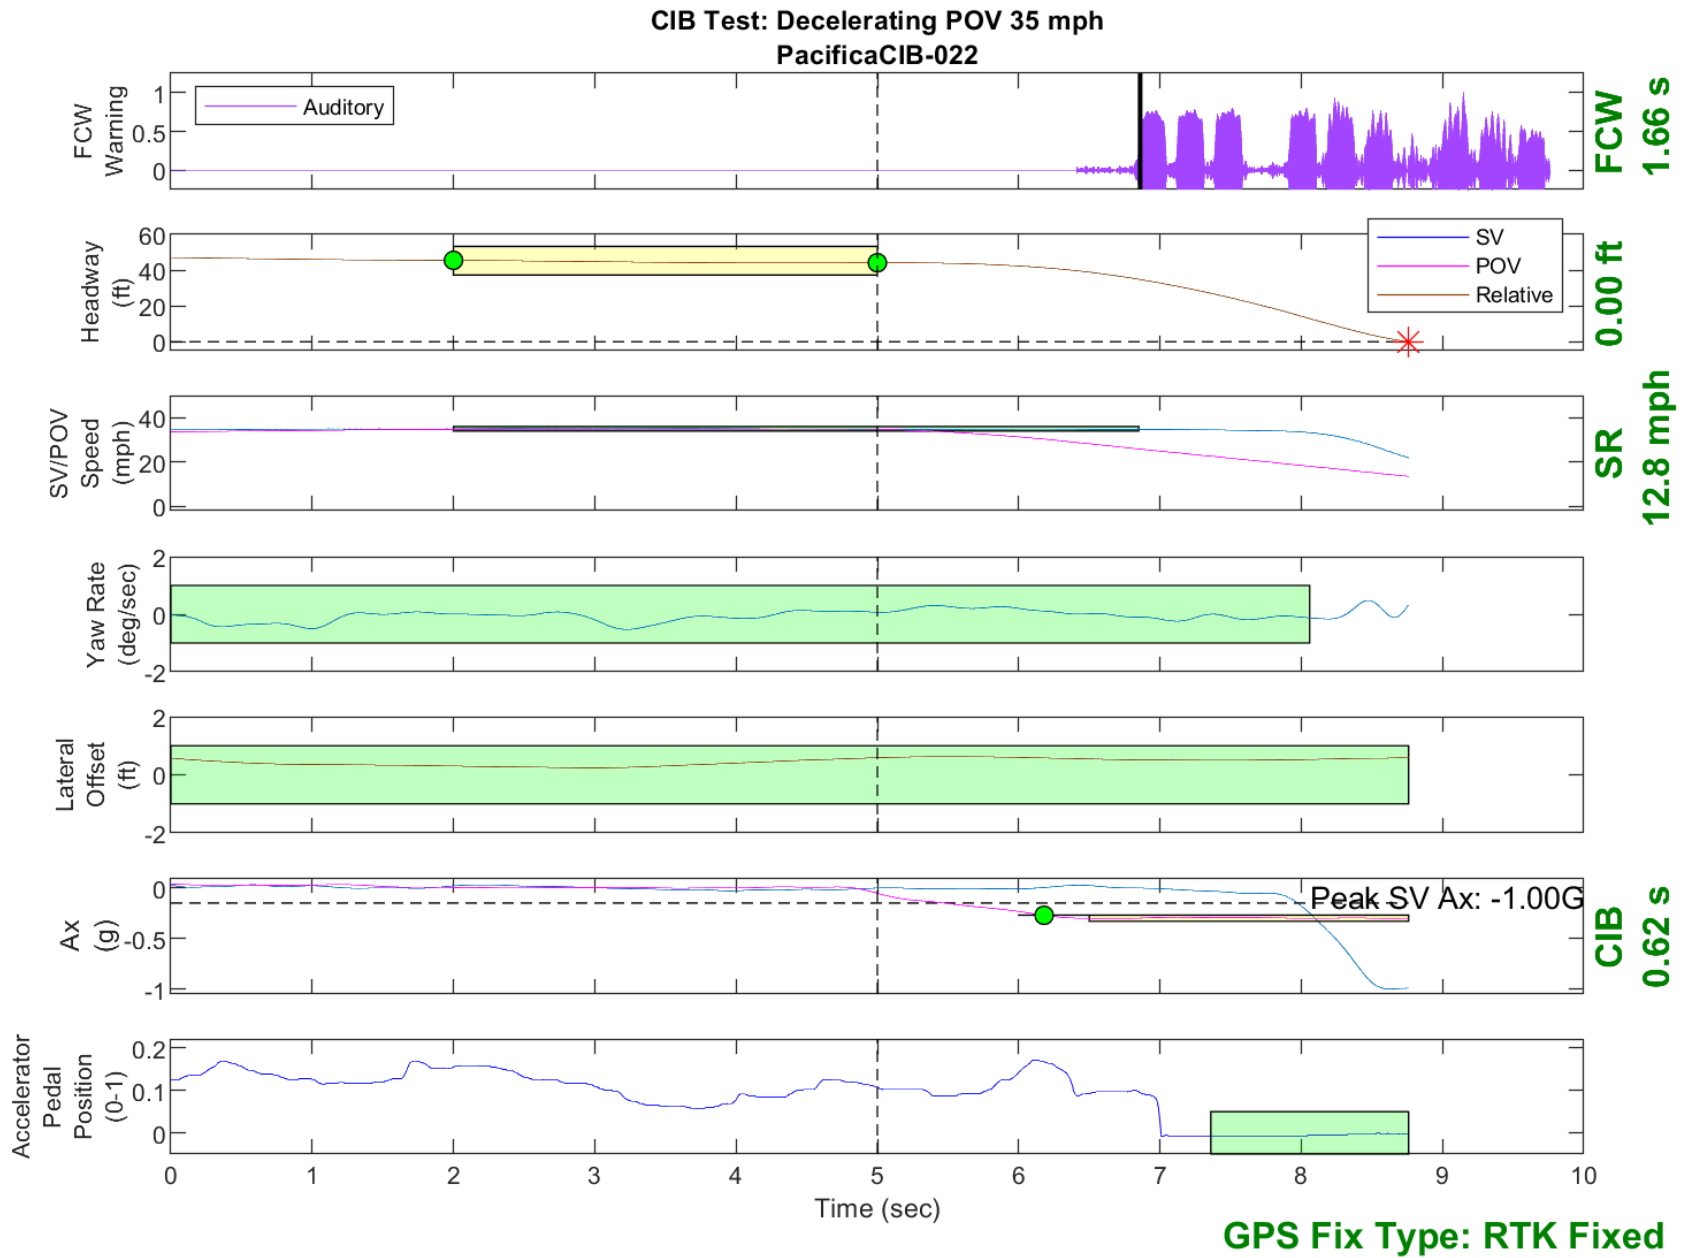


Figure D25. Time History for CIB Run 22, SV Encounters Decelerating POV, SV 35 mph, POV 35 mph

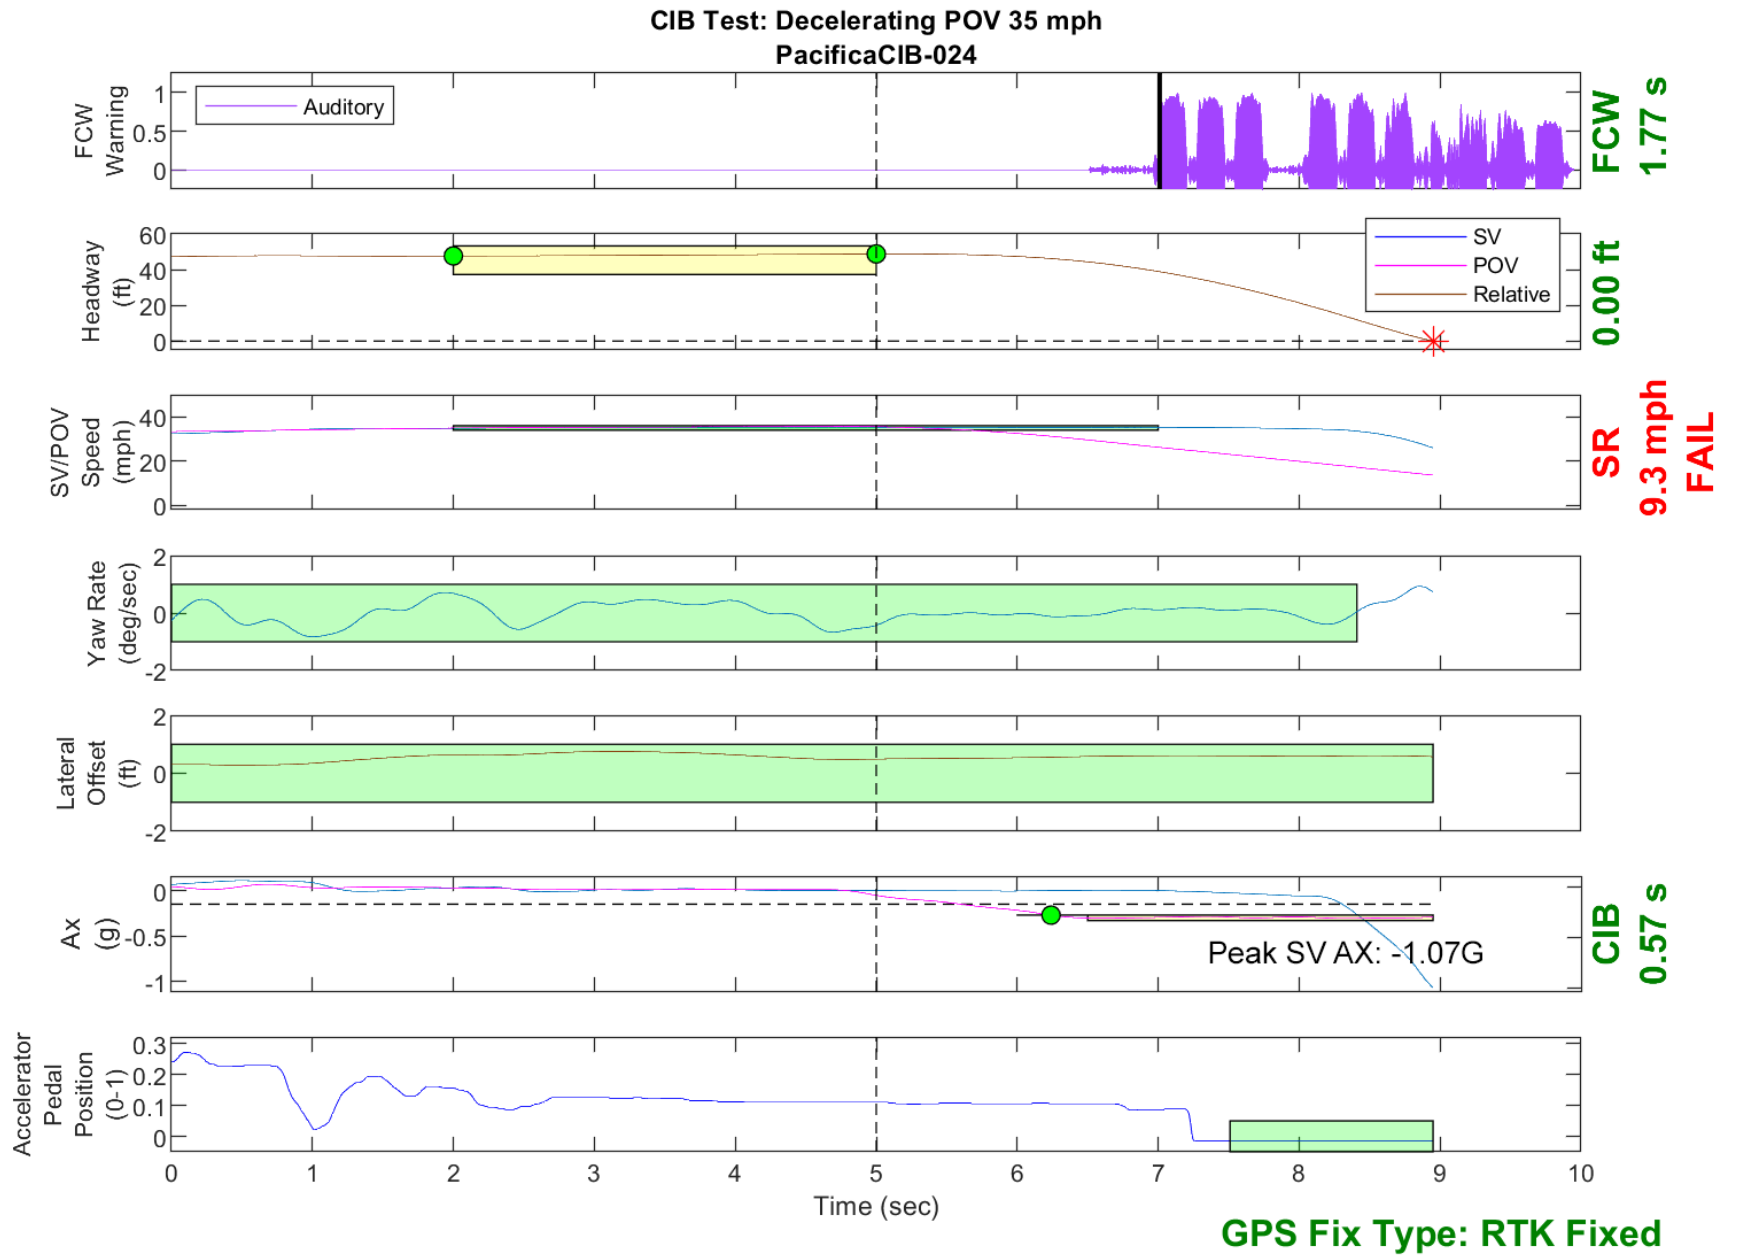


Figure D26. Time History for CIB Run 24, SV Encounters Decelerating POV, SV 35 mph, POV 35 mph

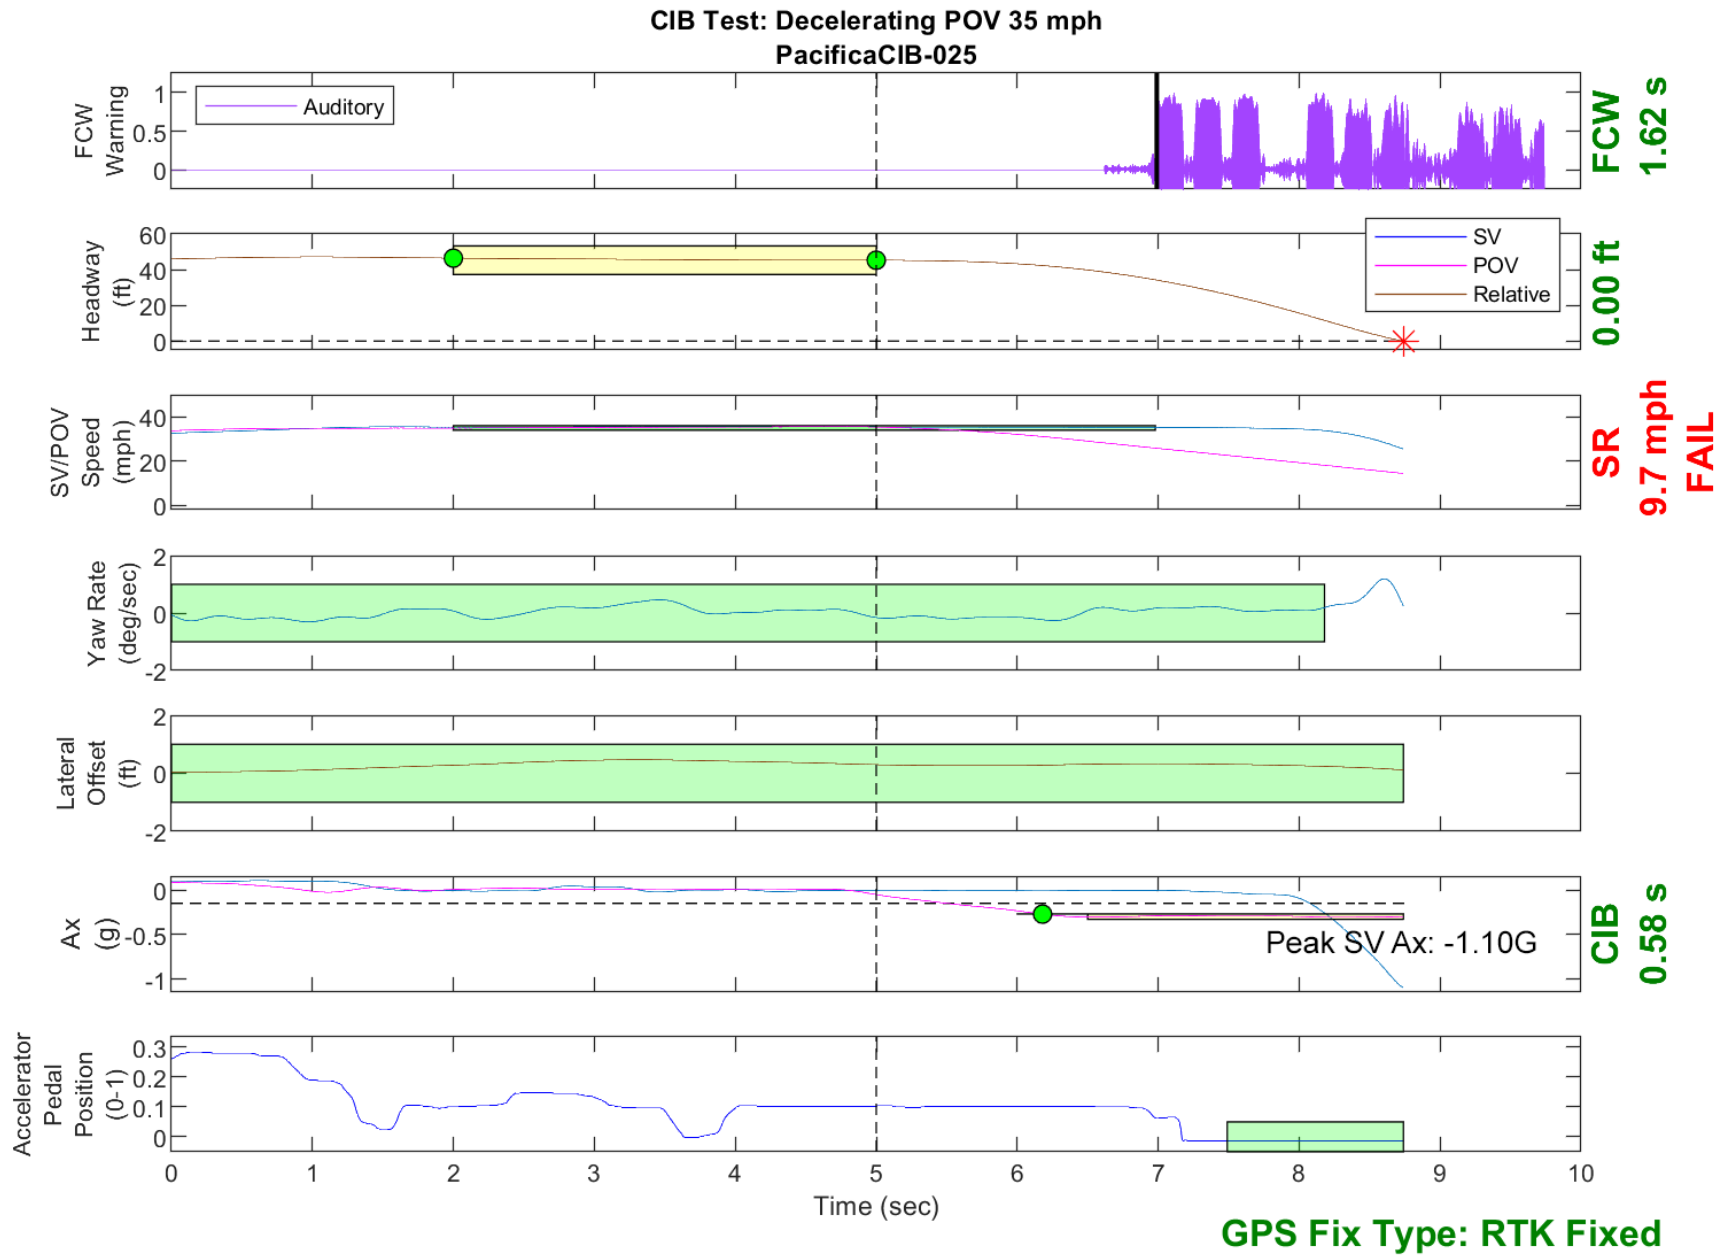


Figure D27. Time History for CIB Run 25, SV Encounters Decelerating POV, SV 35 mph, POV 35 mph

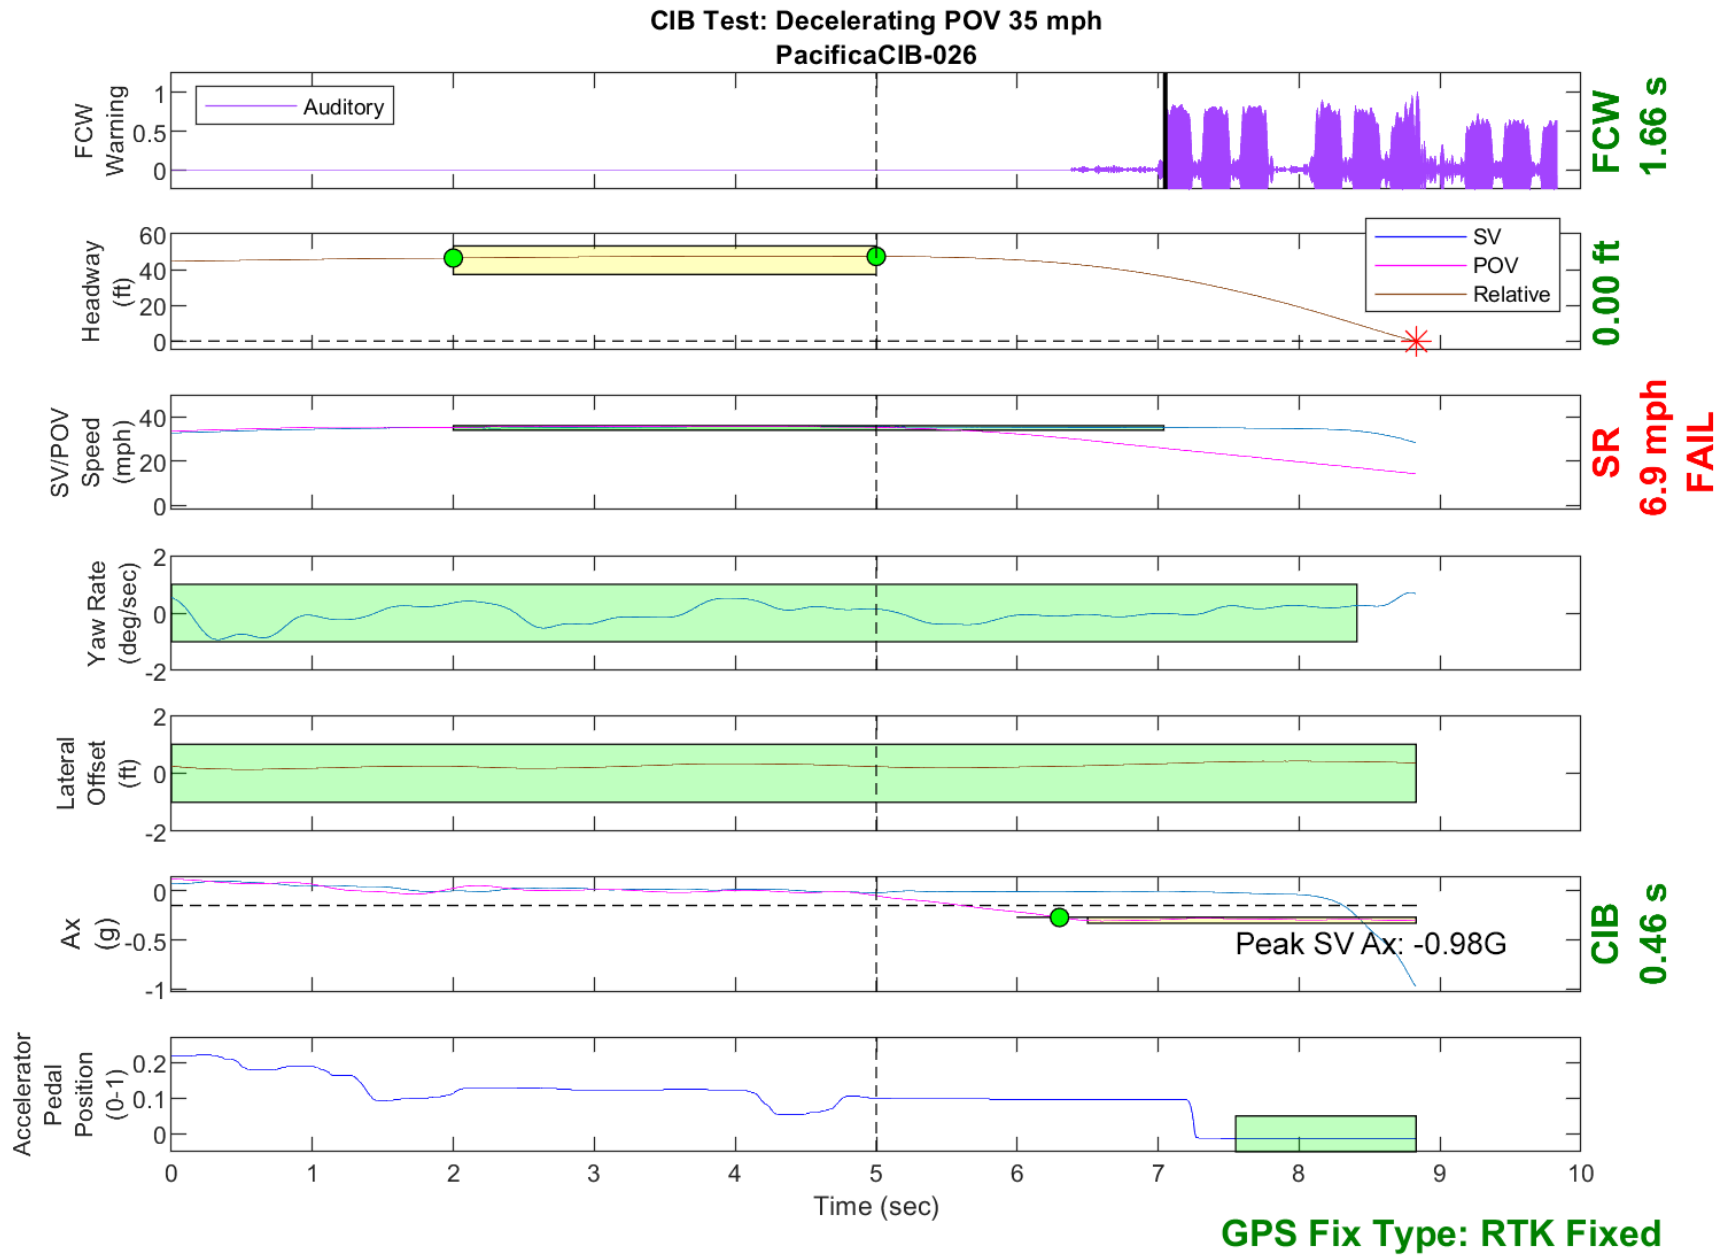


Figure D28. Time History for CIB Run 26, SV Encounters Decelerating POV, SV 35 mph, POV 35 mph

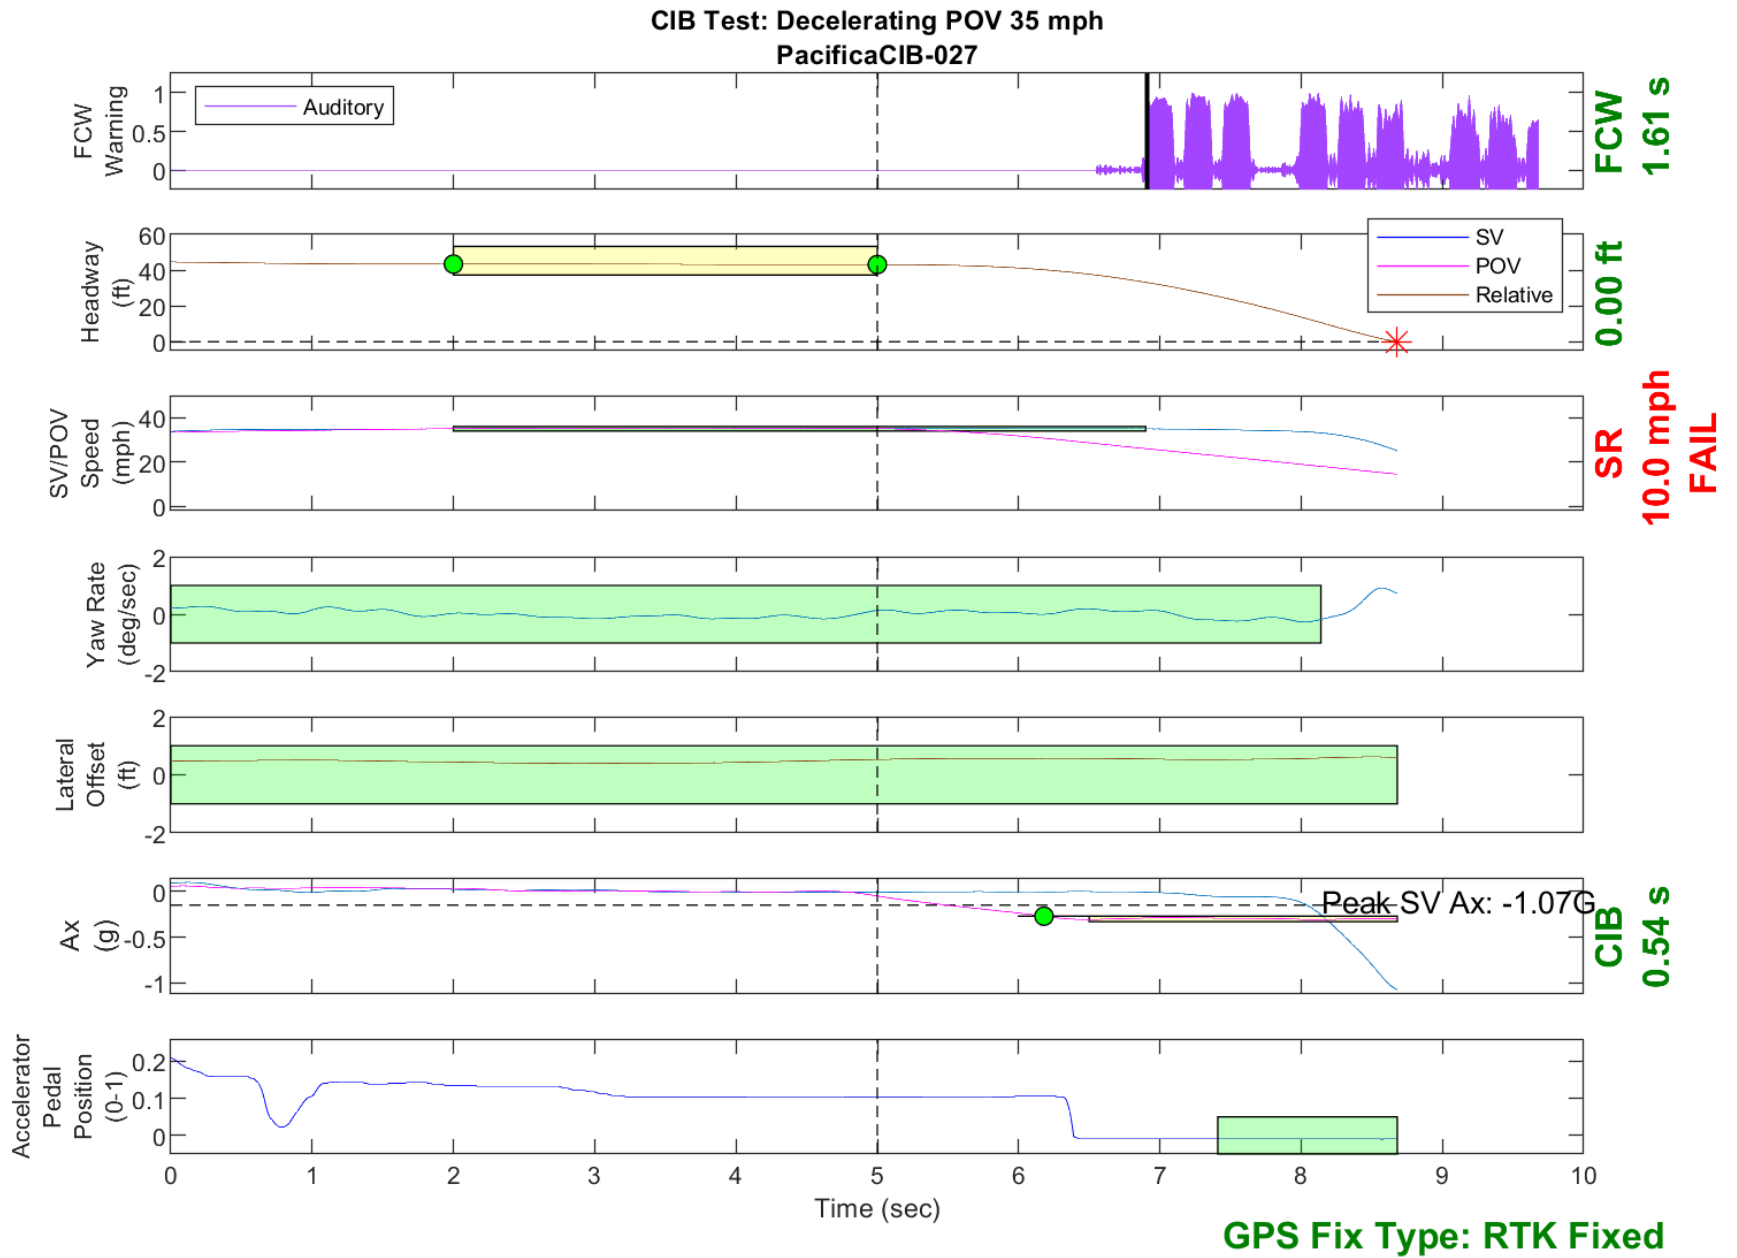


Figure D29. Time History for CIB Run 27, SV Encounters Decelerating POV, SV 35 mph, POV 35 mph

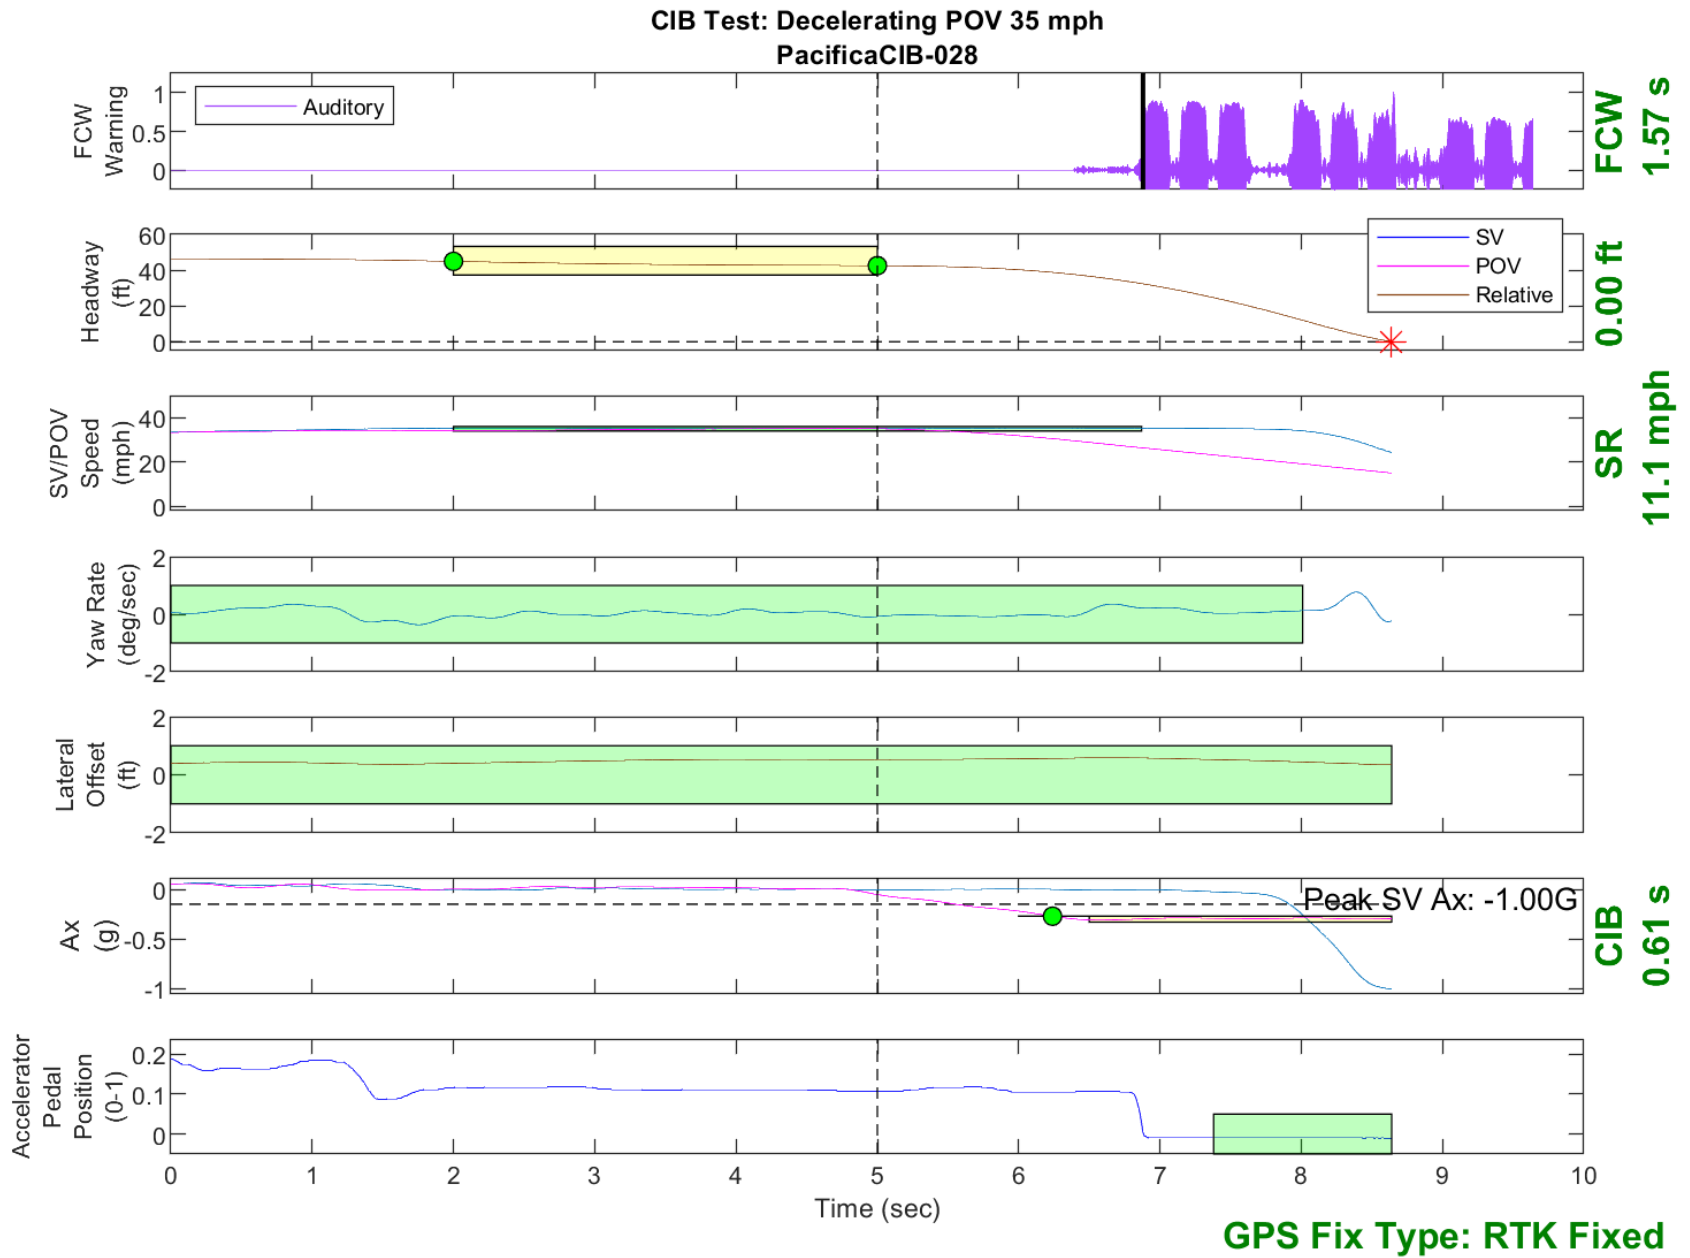


Figure D30. Time History for CIB Run 28, SV Encounters Decelerating POV, SV 35 mph, POV 35 mph

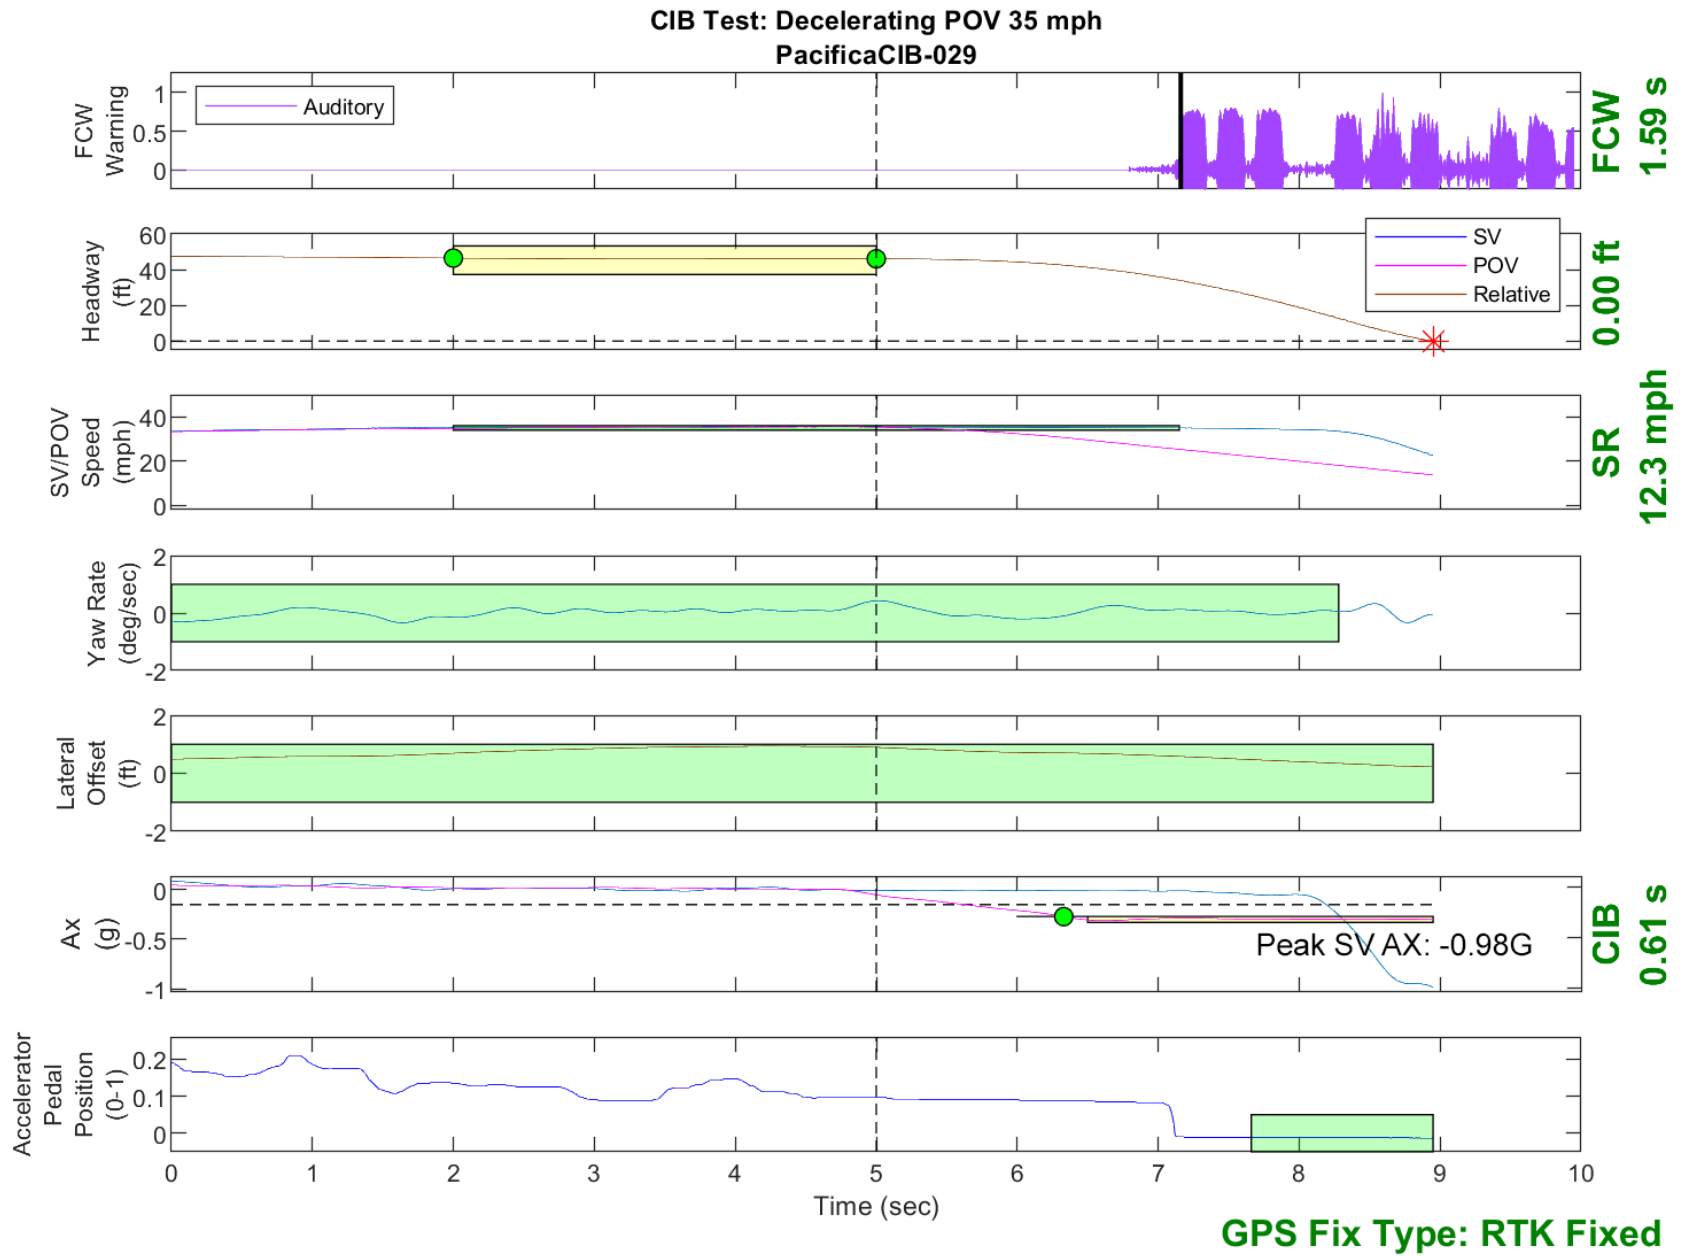


Figure D31. Time History for CIB Run 29, SV Encounters Decelerating POV, SV 35 mph, POV 35 mph



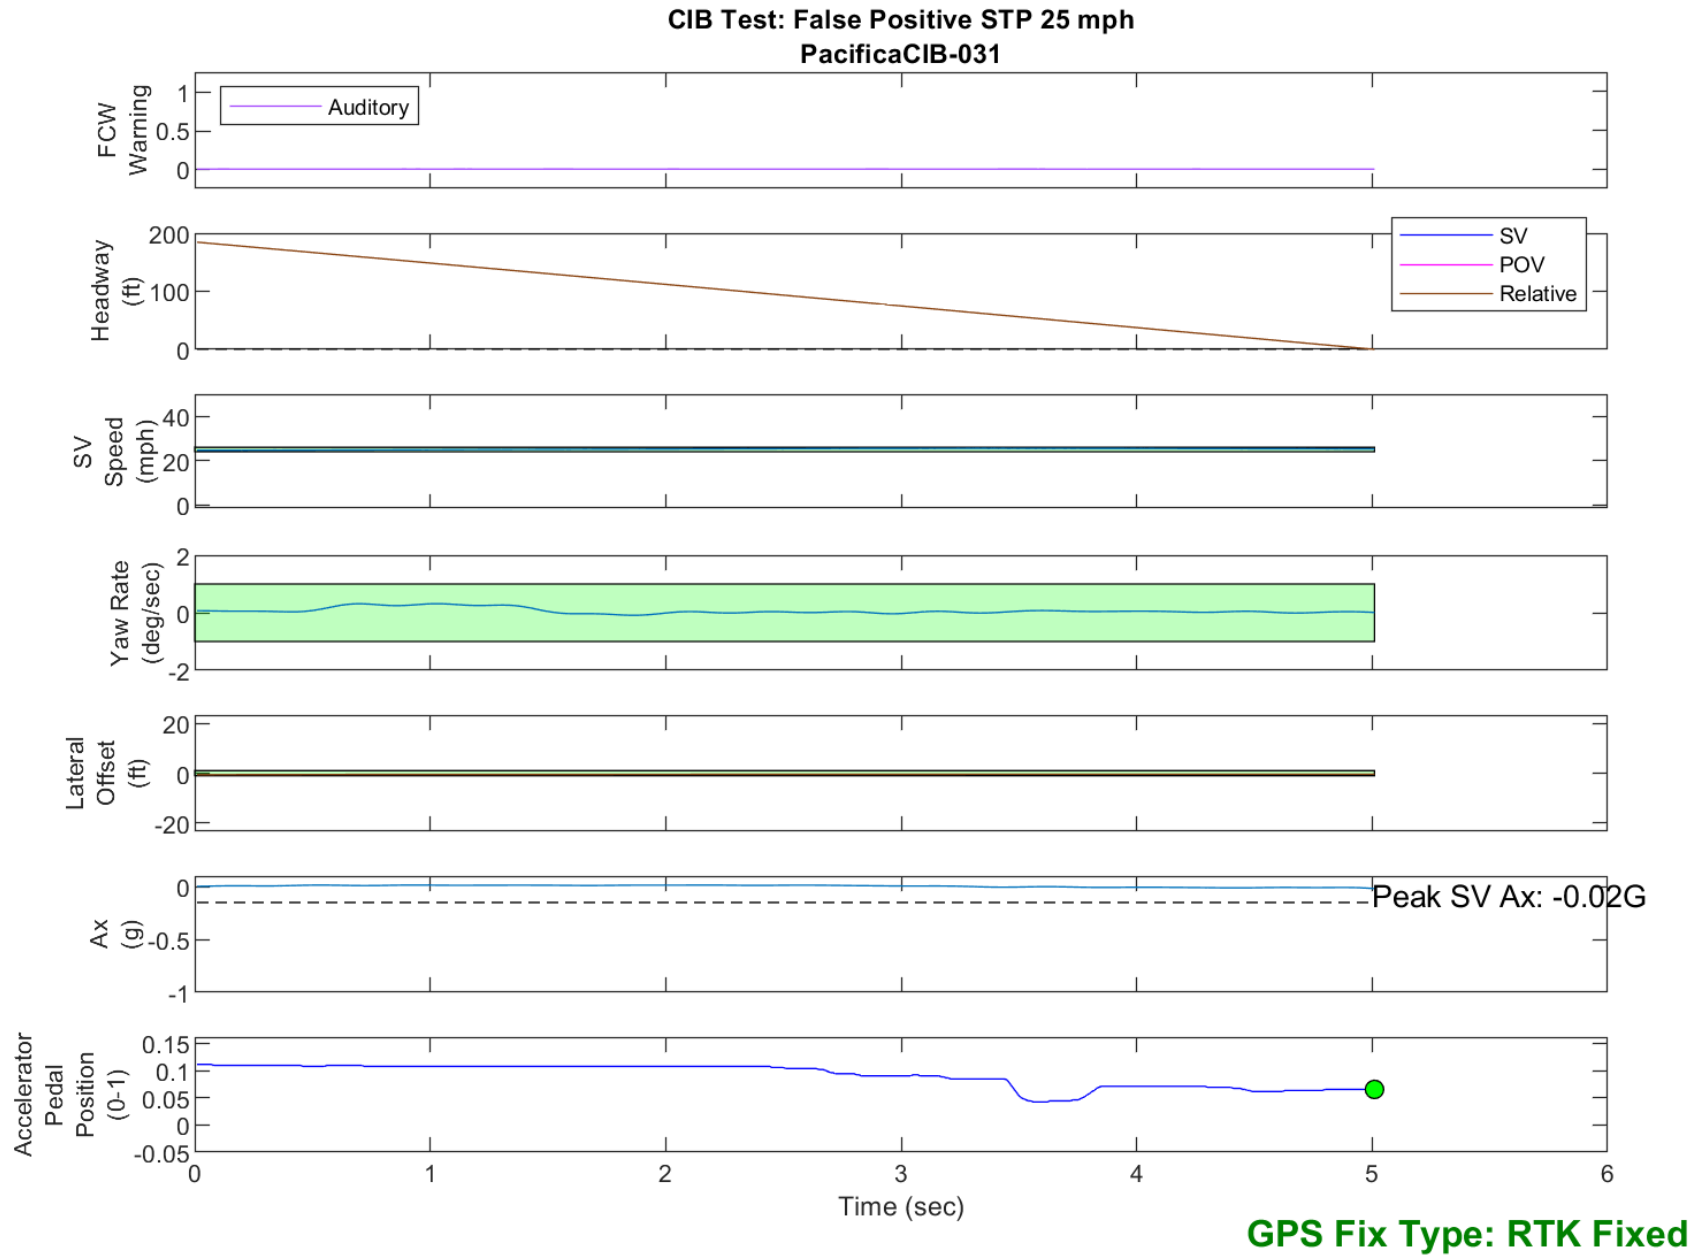


Figure D32. Time History for CIB Run 31, SV Encounters Steel Trench Plate, SV 25 mph

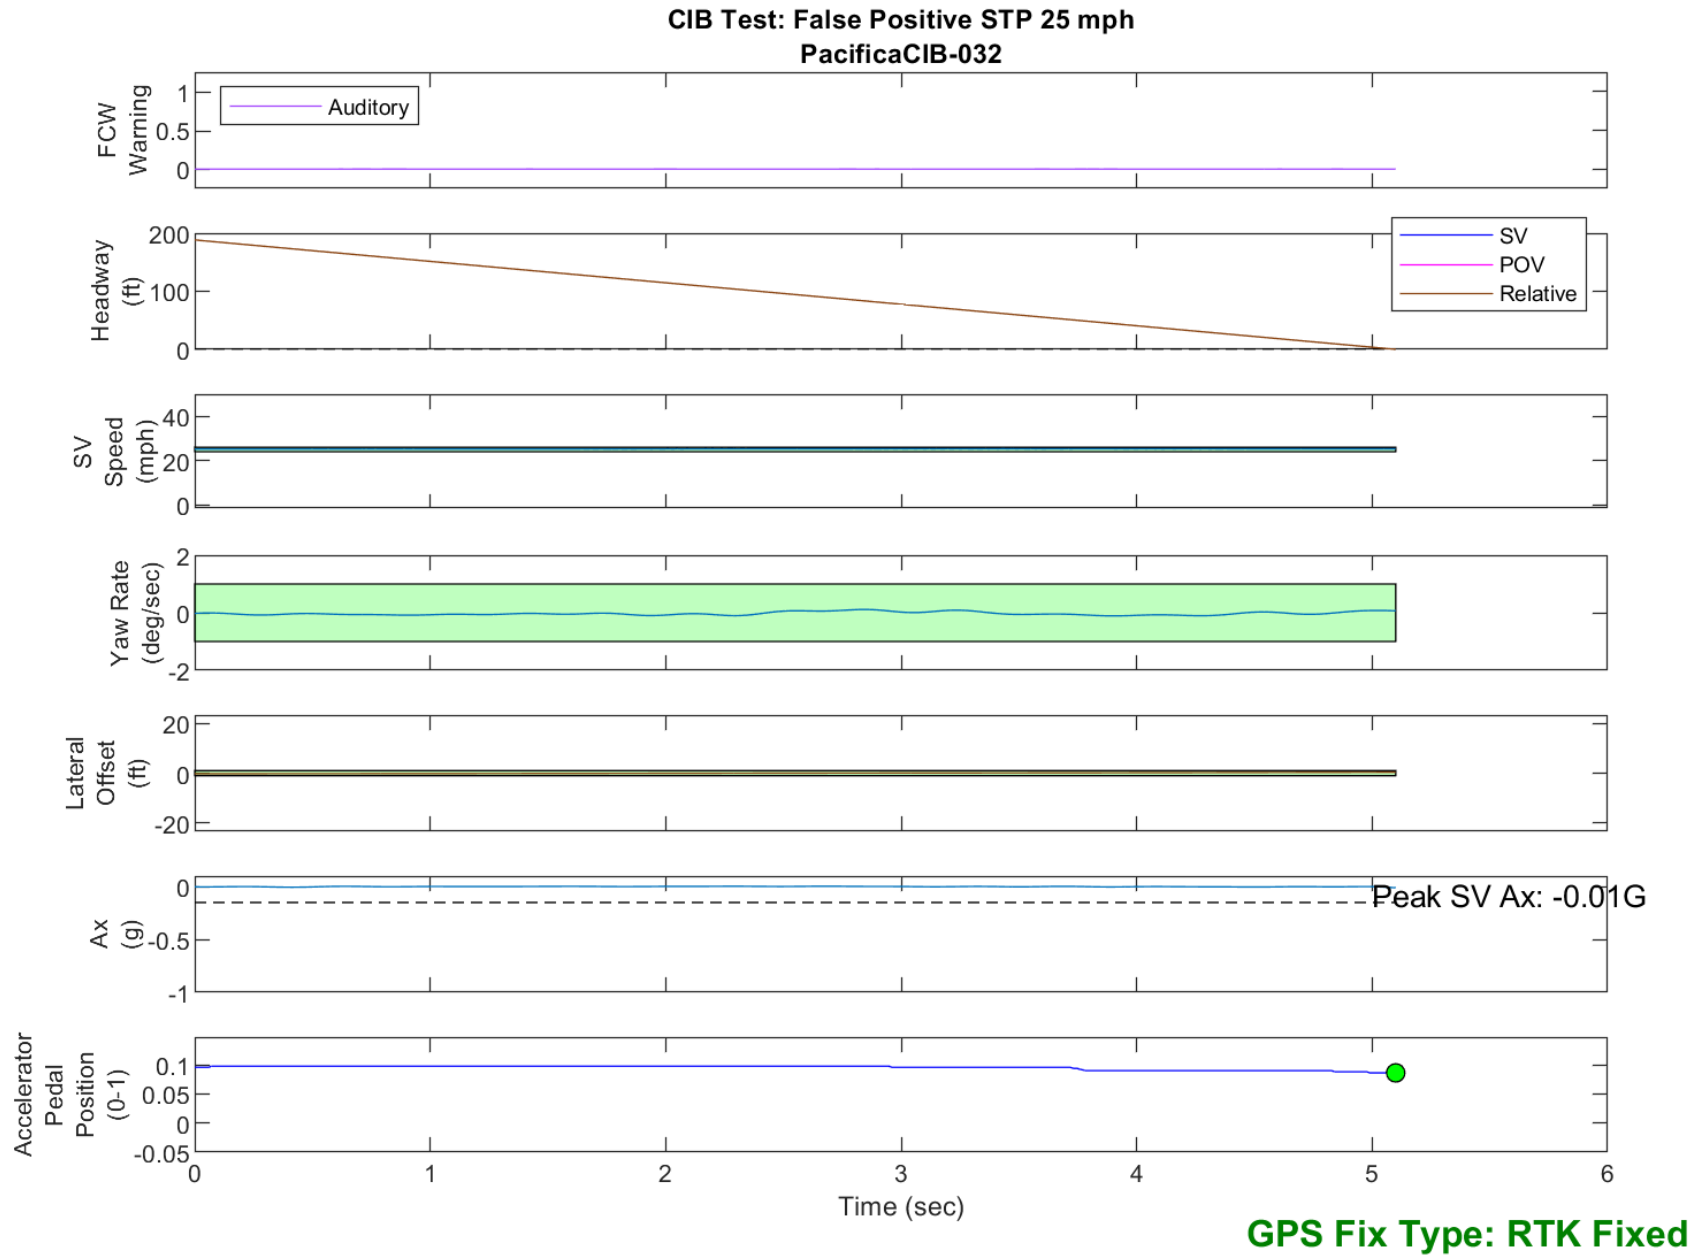


Figure D33. Time History for CIB Run 32, SV Encounters Steel Trench Plate, SV 25 mph

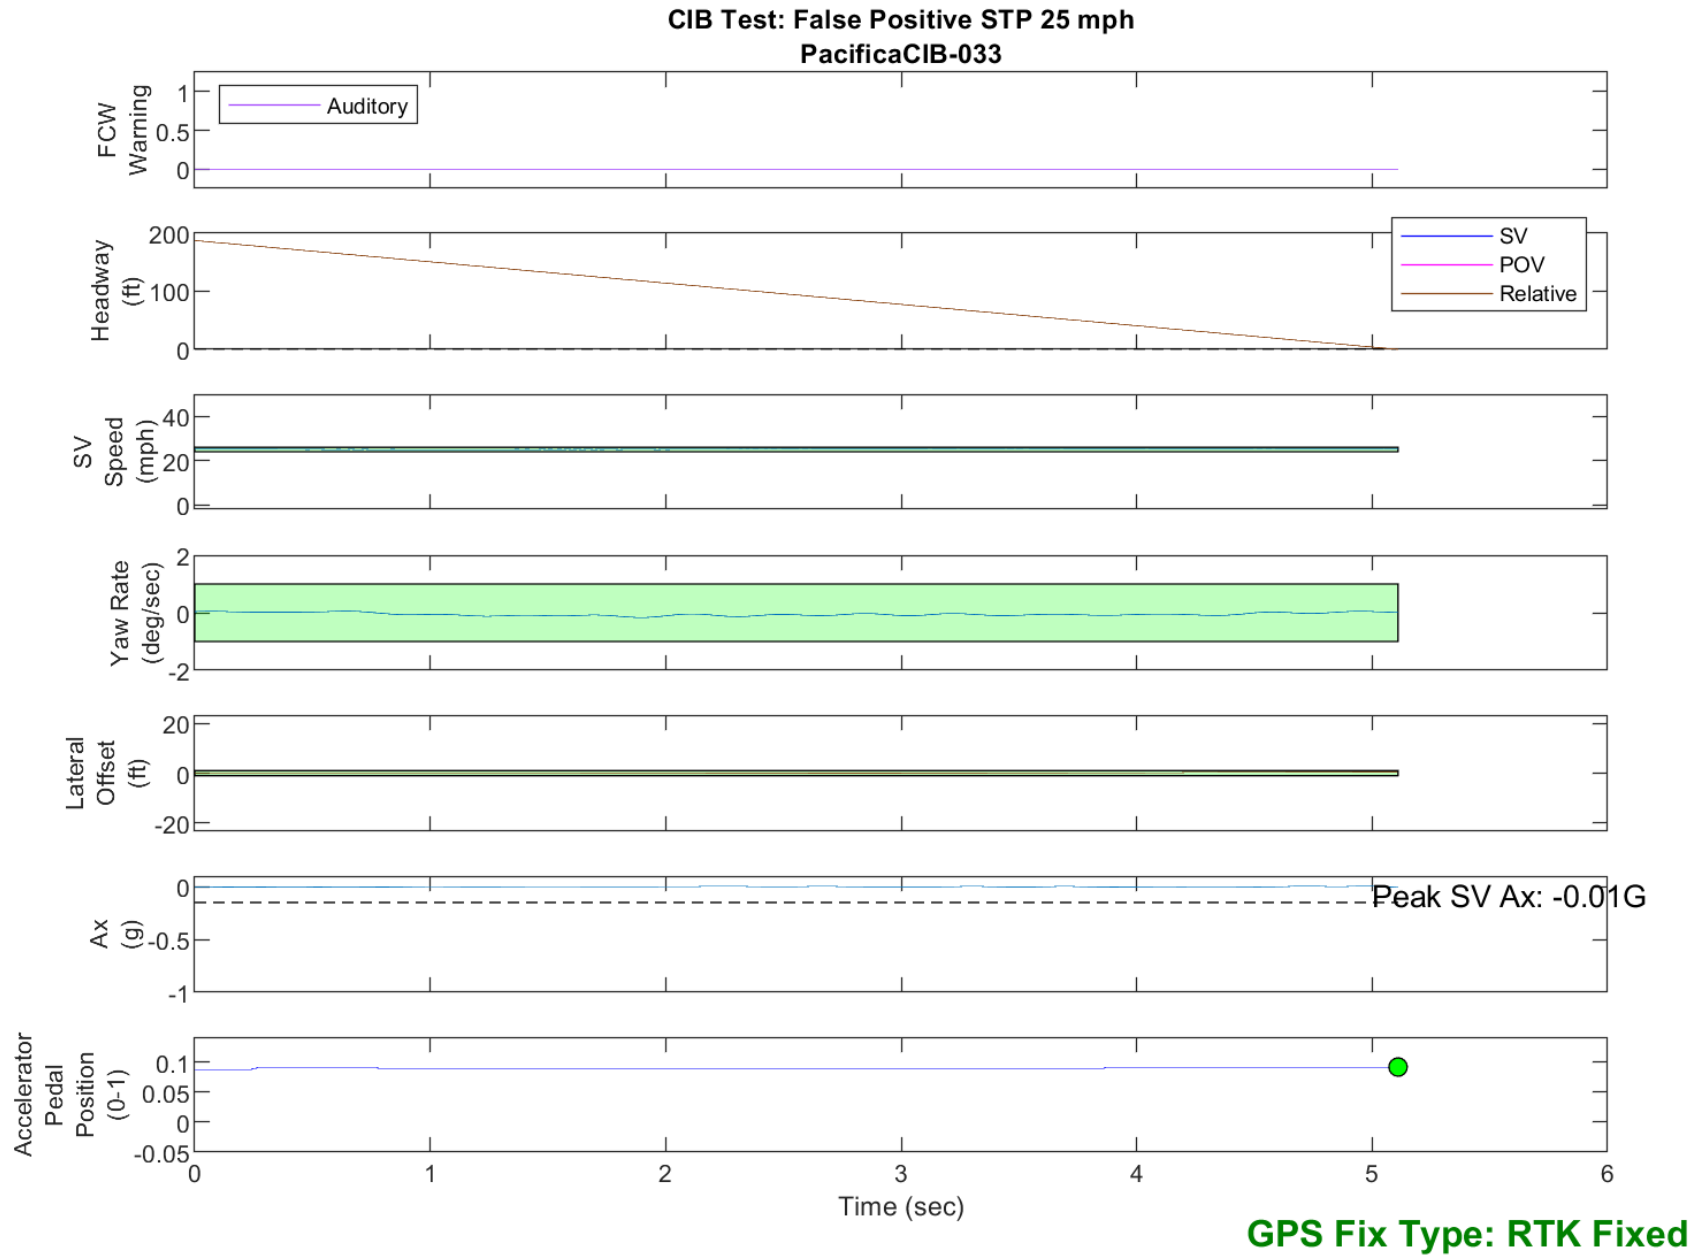


Figure D34. Time History for CIB Run 33, SV Encounters Steel Trench Plate, SV 25 mph

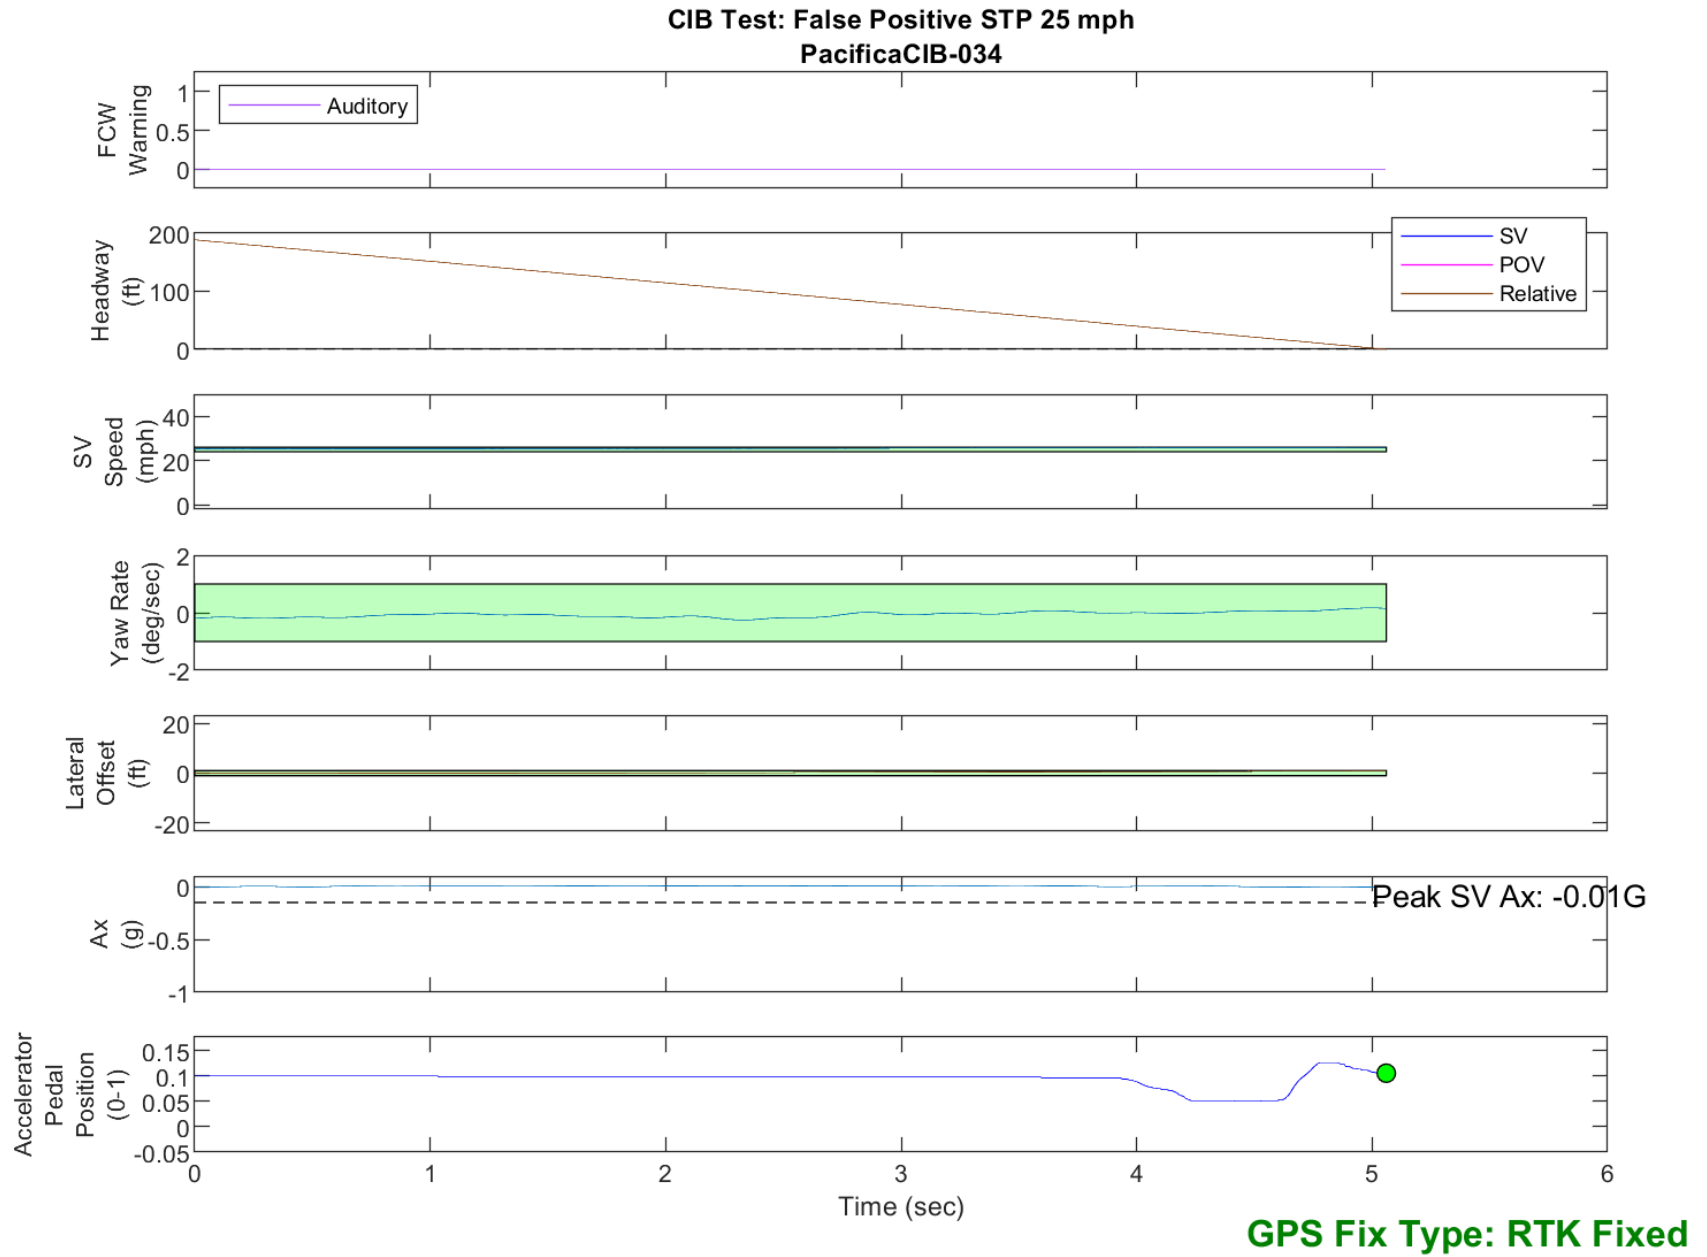


Figure D35. Time History for CIB Run 34, SV Encounters Steel Trench Plate, SV 25 mph

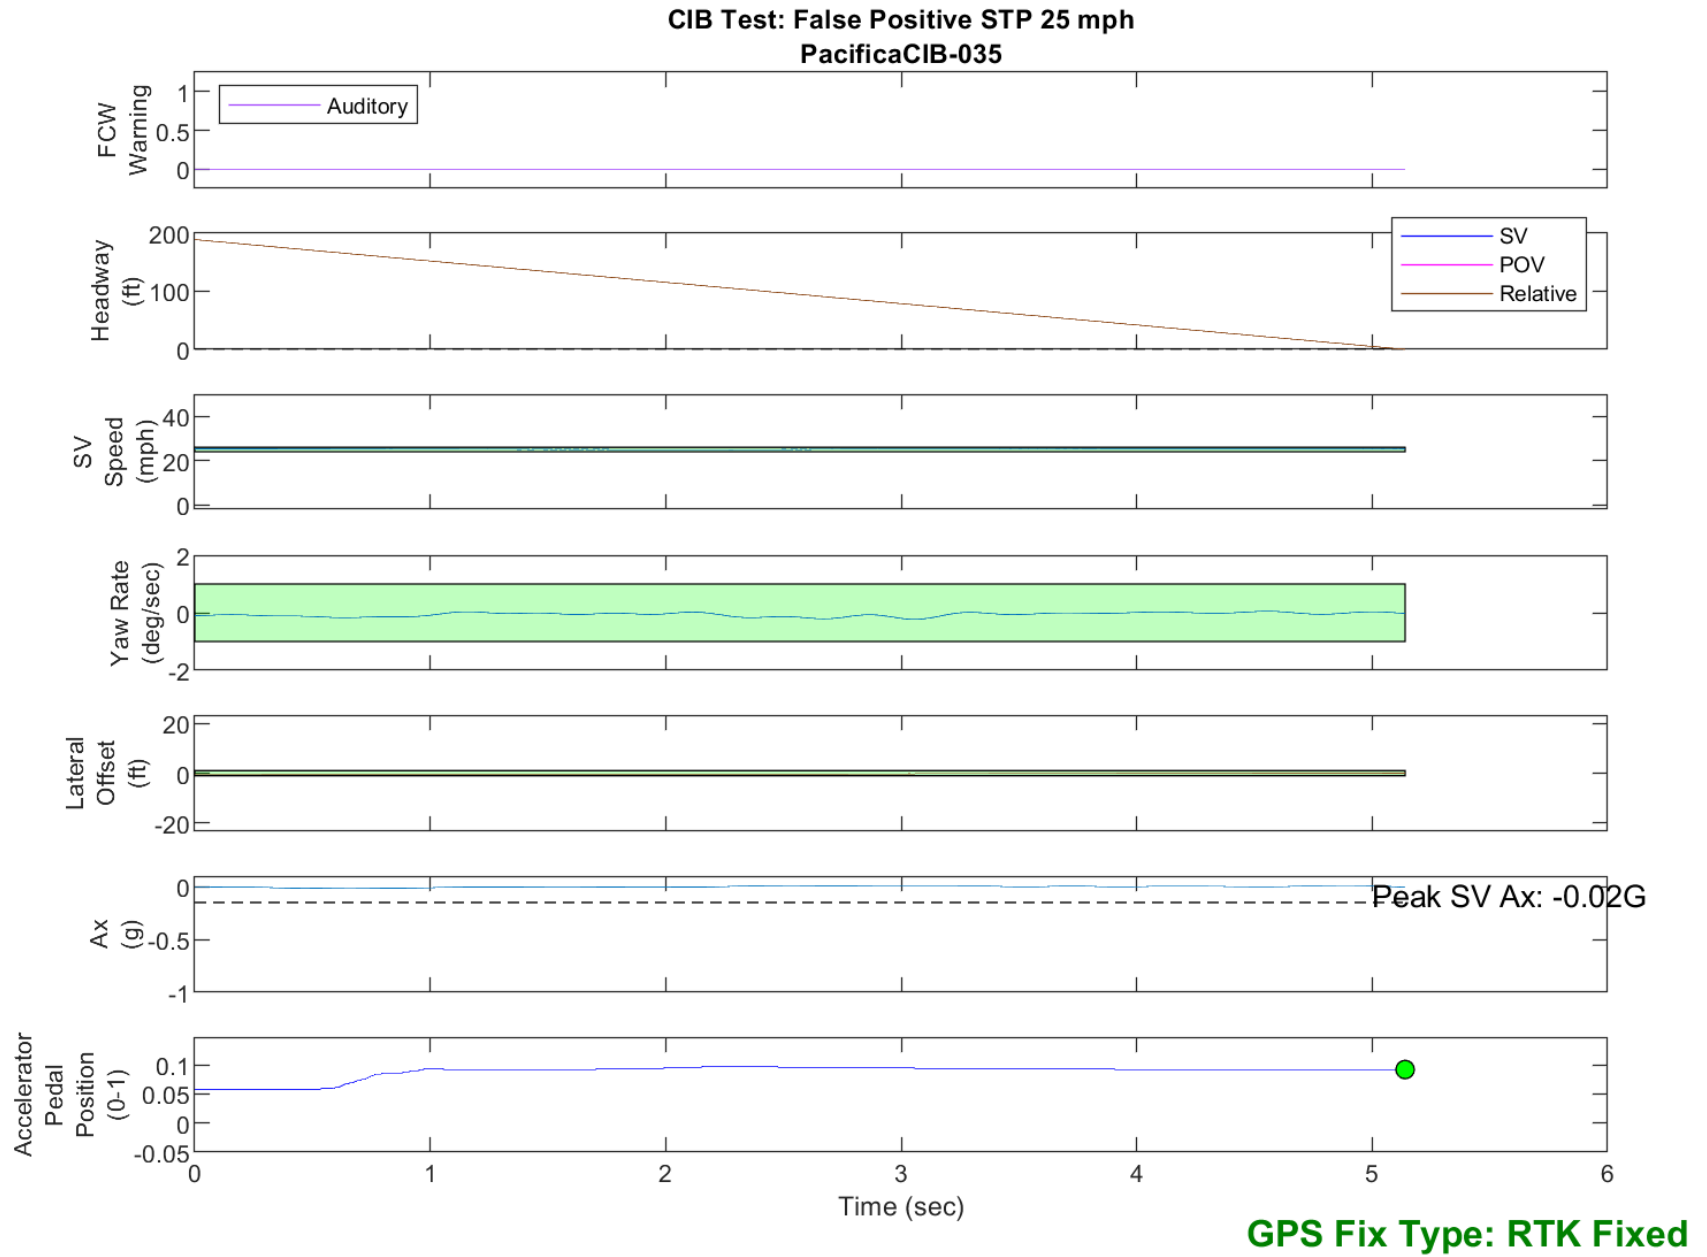


Figure D36. Time History for CIB Run 35, SV Encounters Steel Trench Plate, SV 25 mph

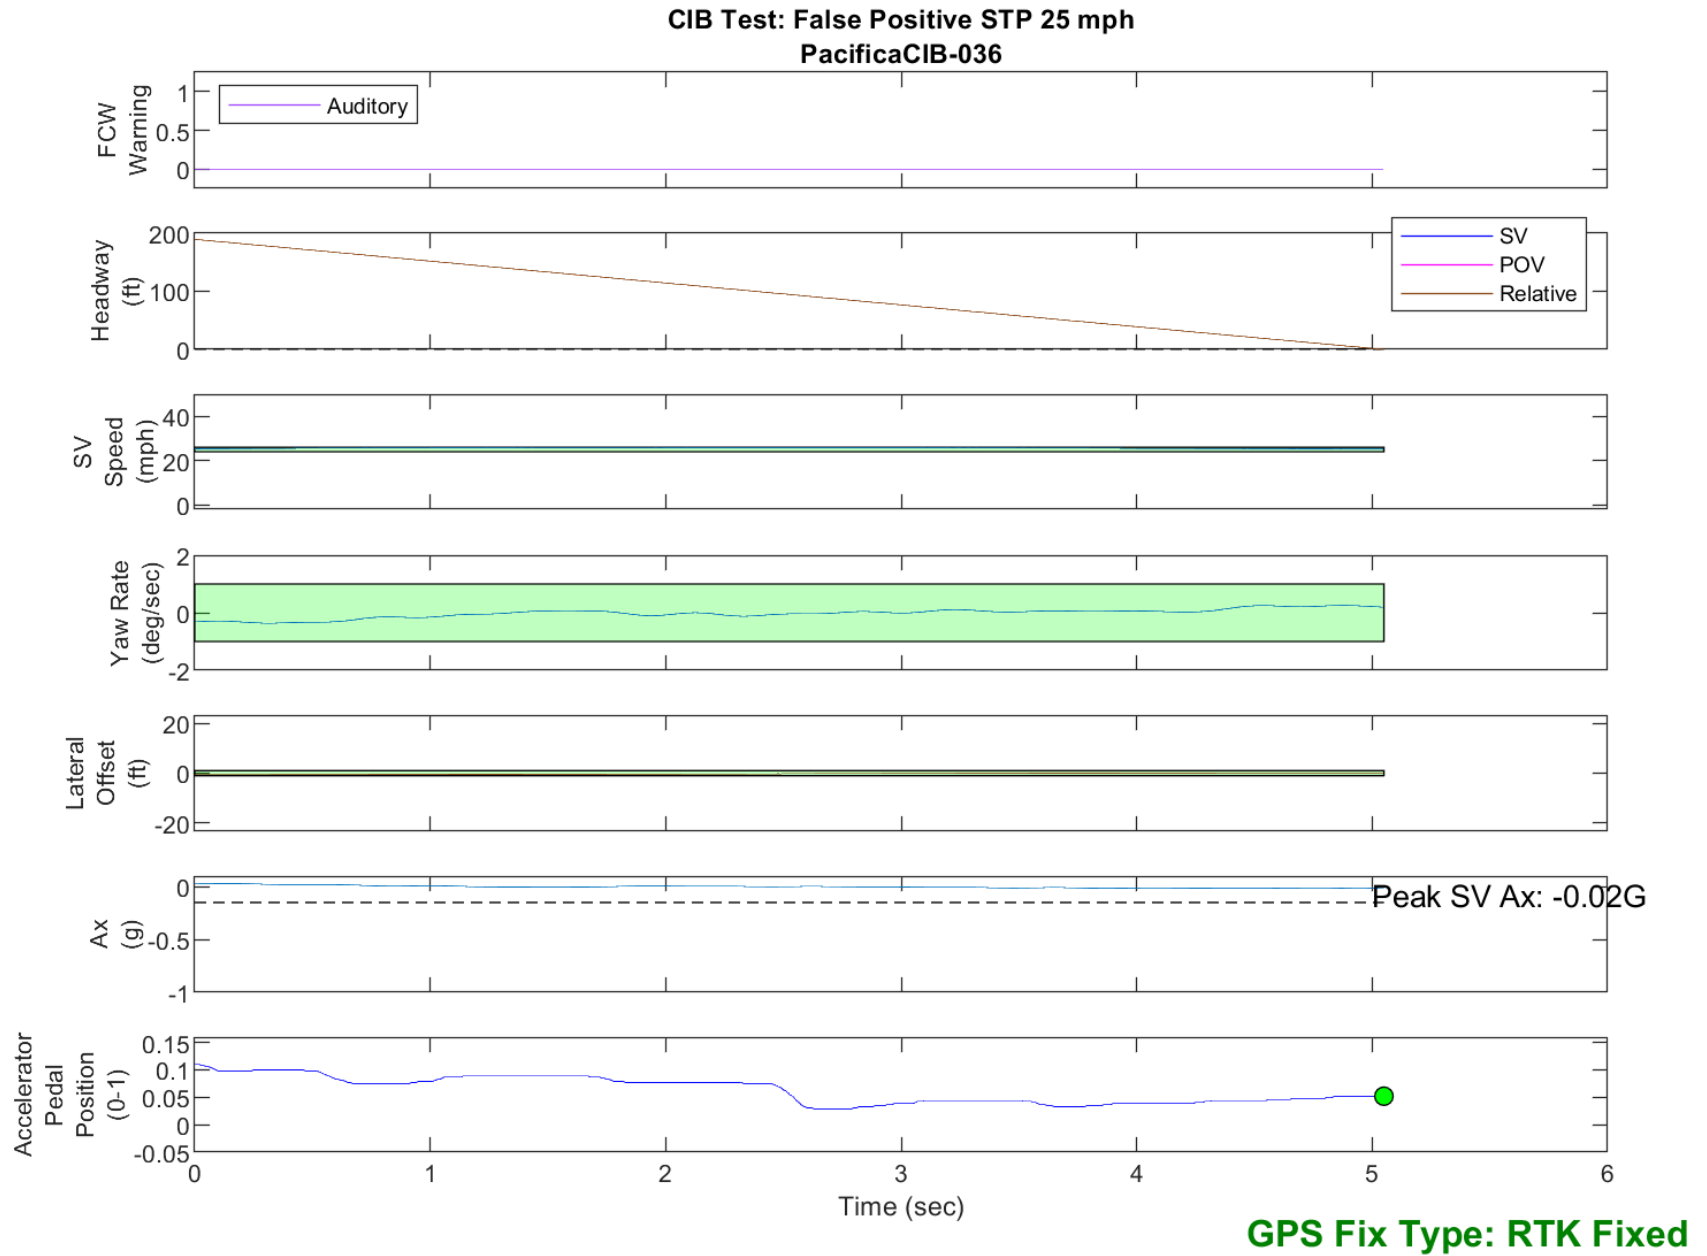


Figure D37. Time History for CIB Run 36, SV Encounters Steel Trench Plate, SV 25 mph

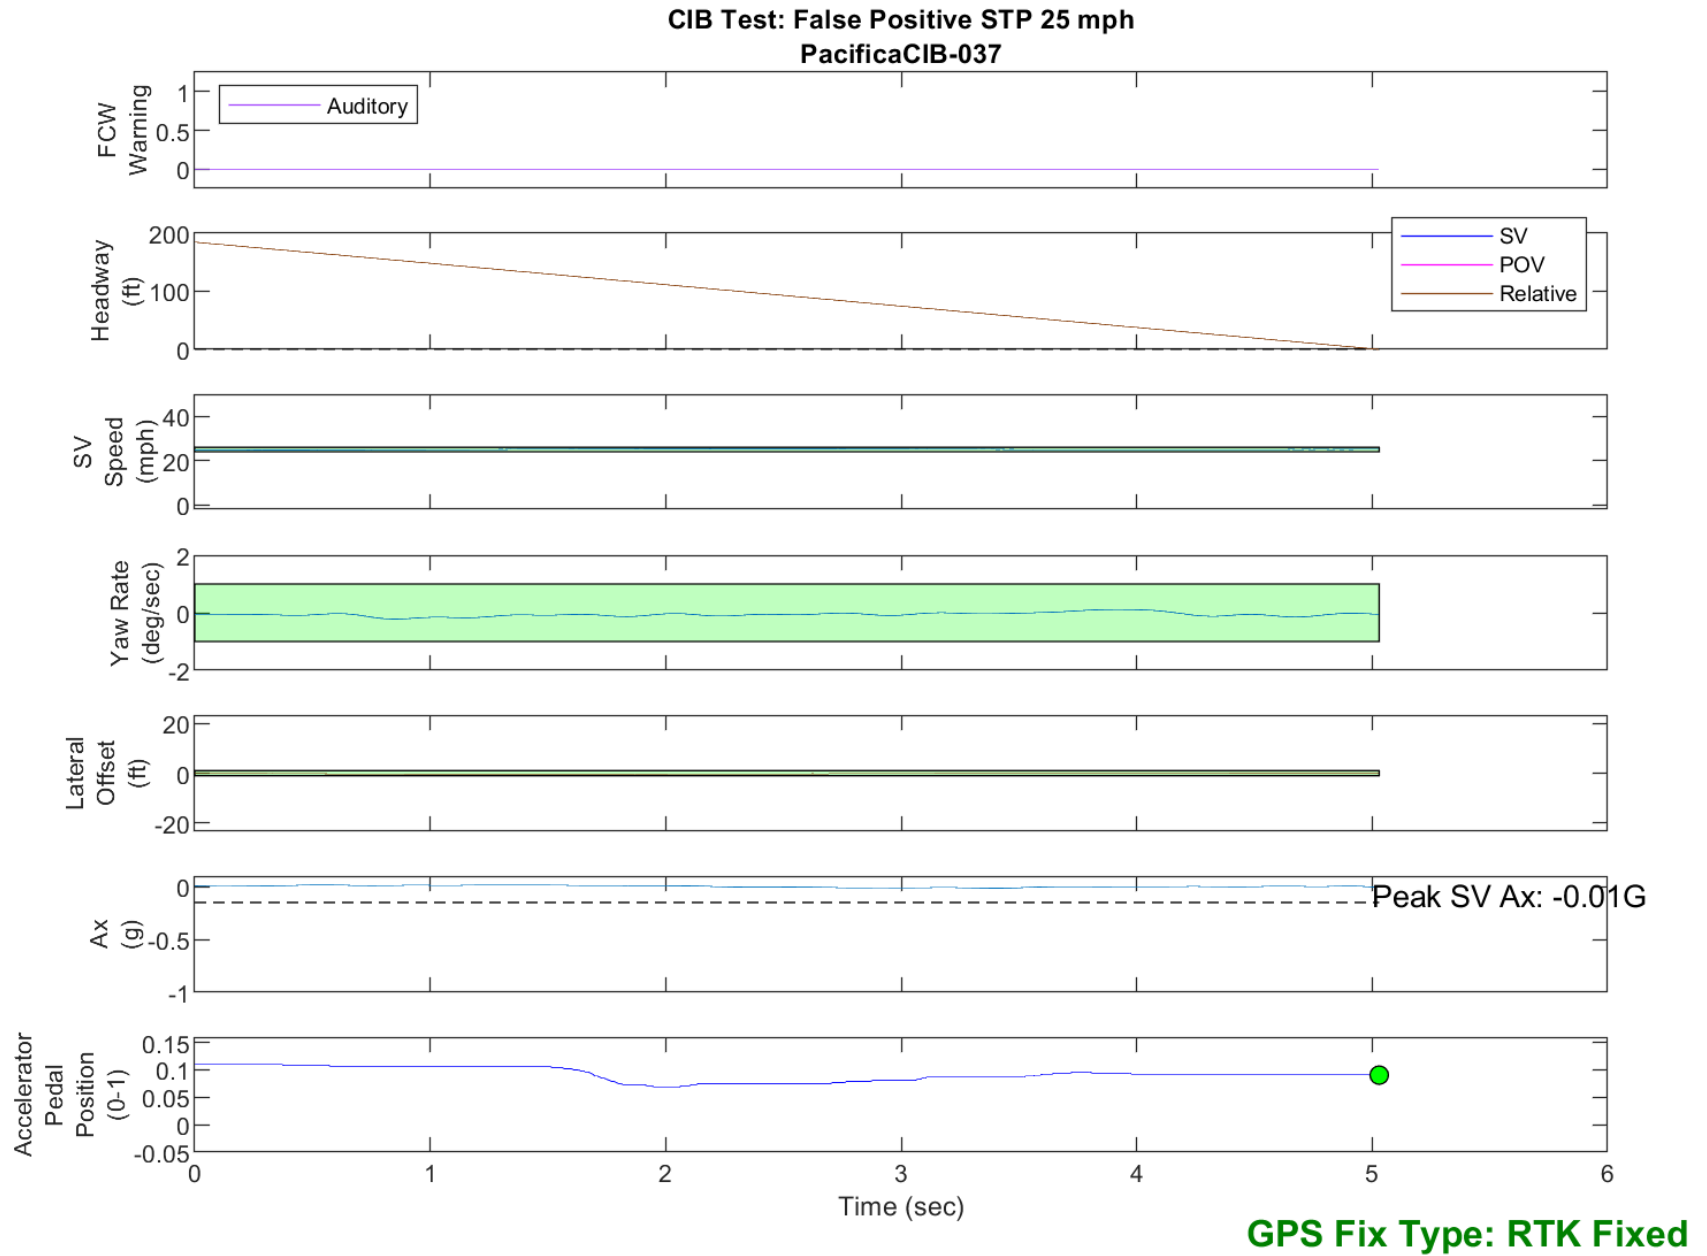


Figure D38. Time History for CIB Run 37, SV Encounters Steel Trench Plate, SV 25 mph

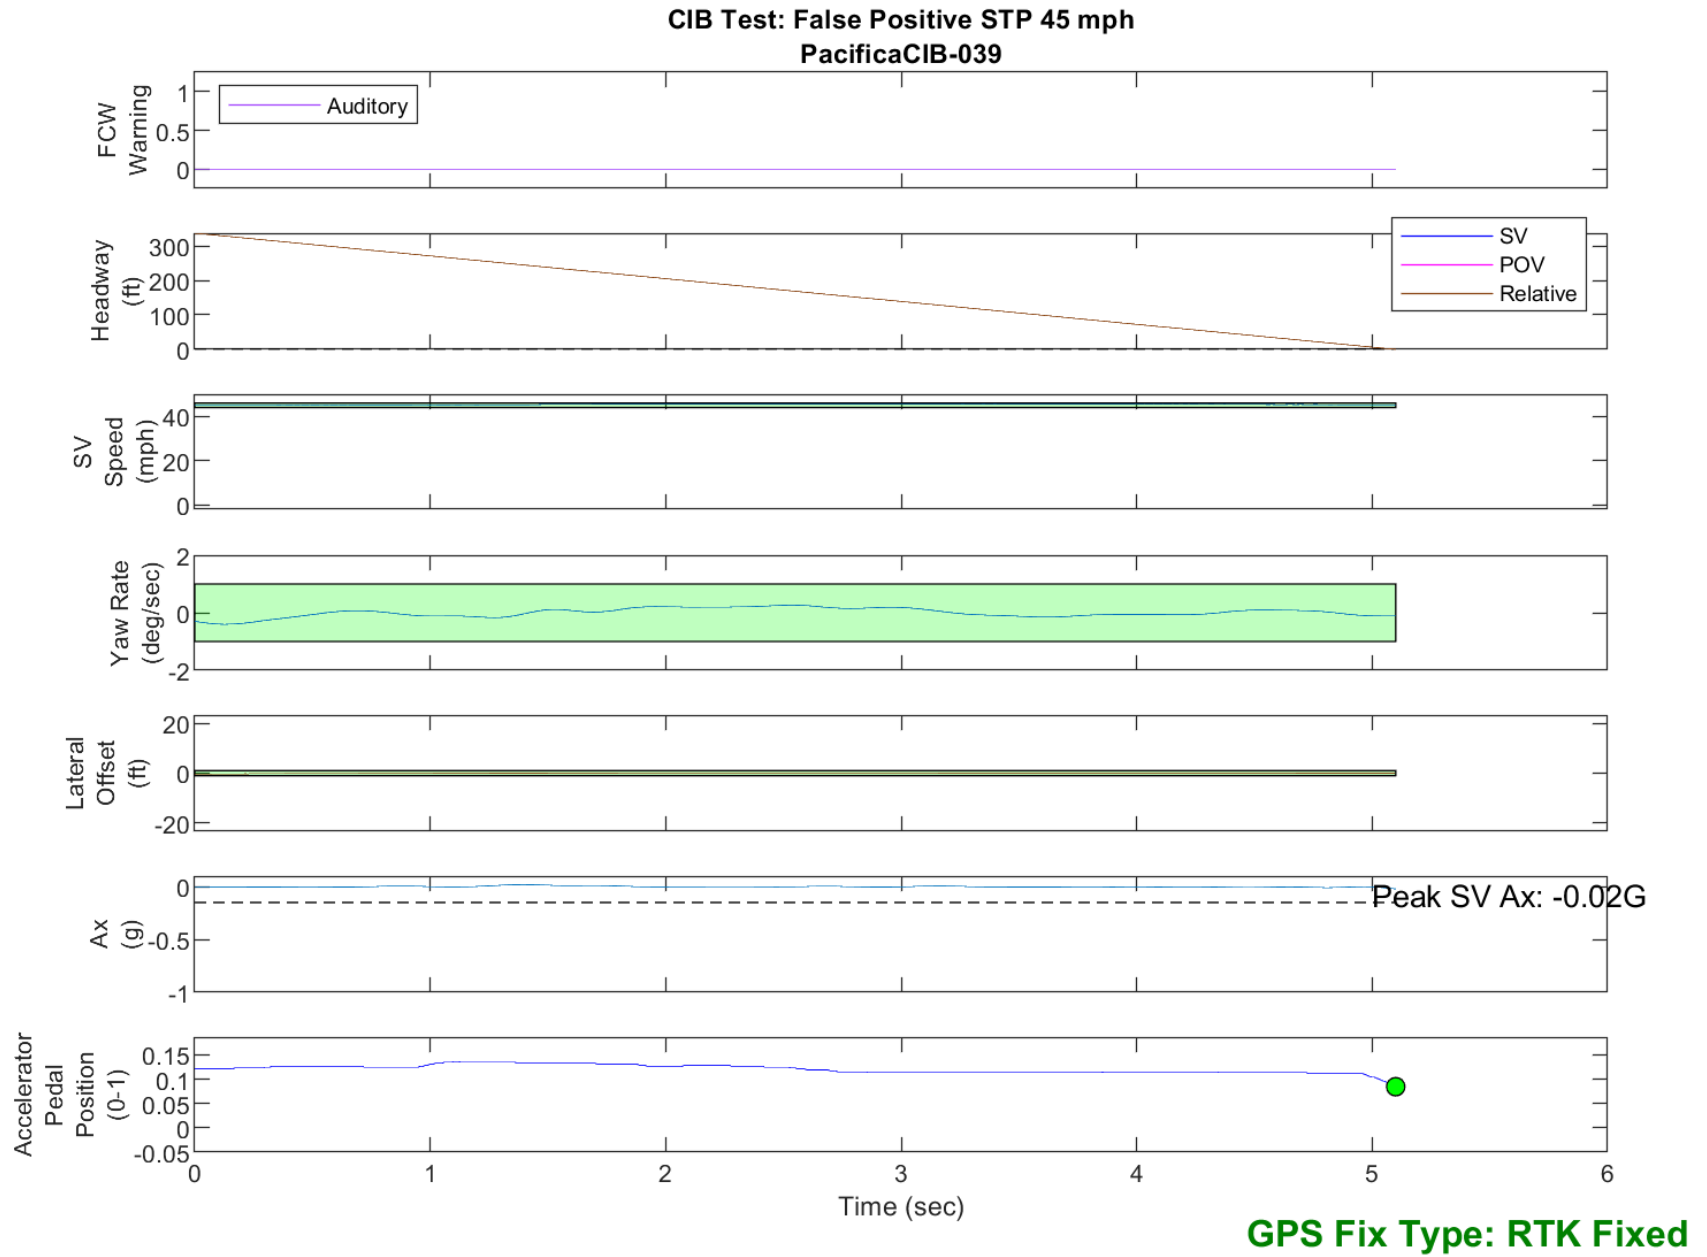


Figure D39. Time History for CIB Run 39, SV Encounters Steel Trench Plate, SV 45 mph



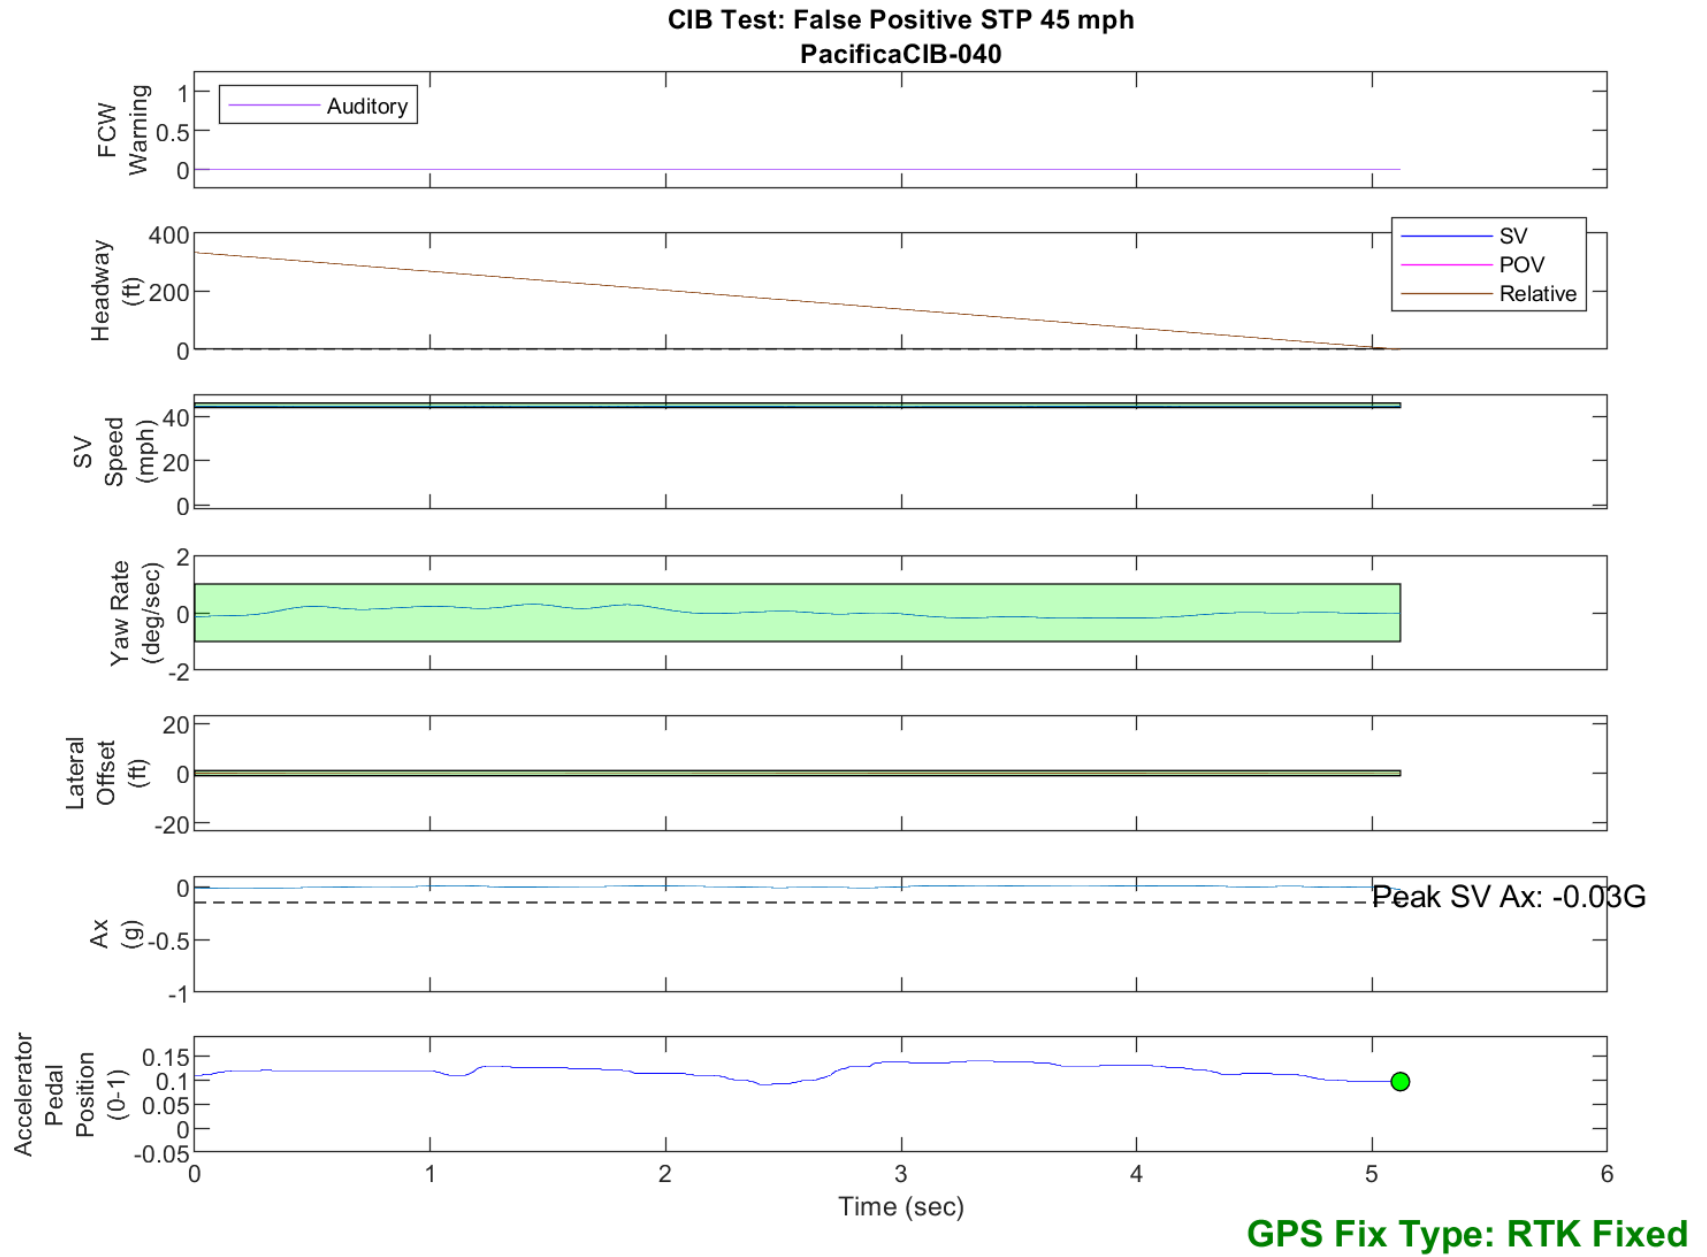


Figure D40. Time History for CIB Run 40, SV Encounters Steel Trench Plate, SV 45 mph

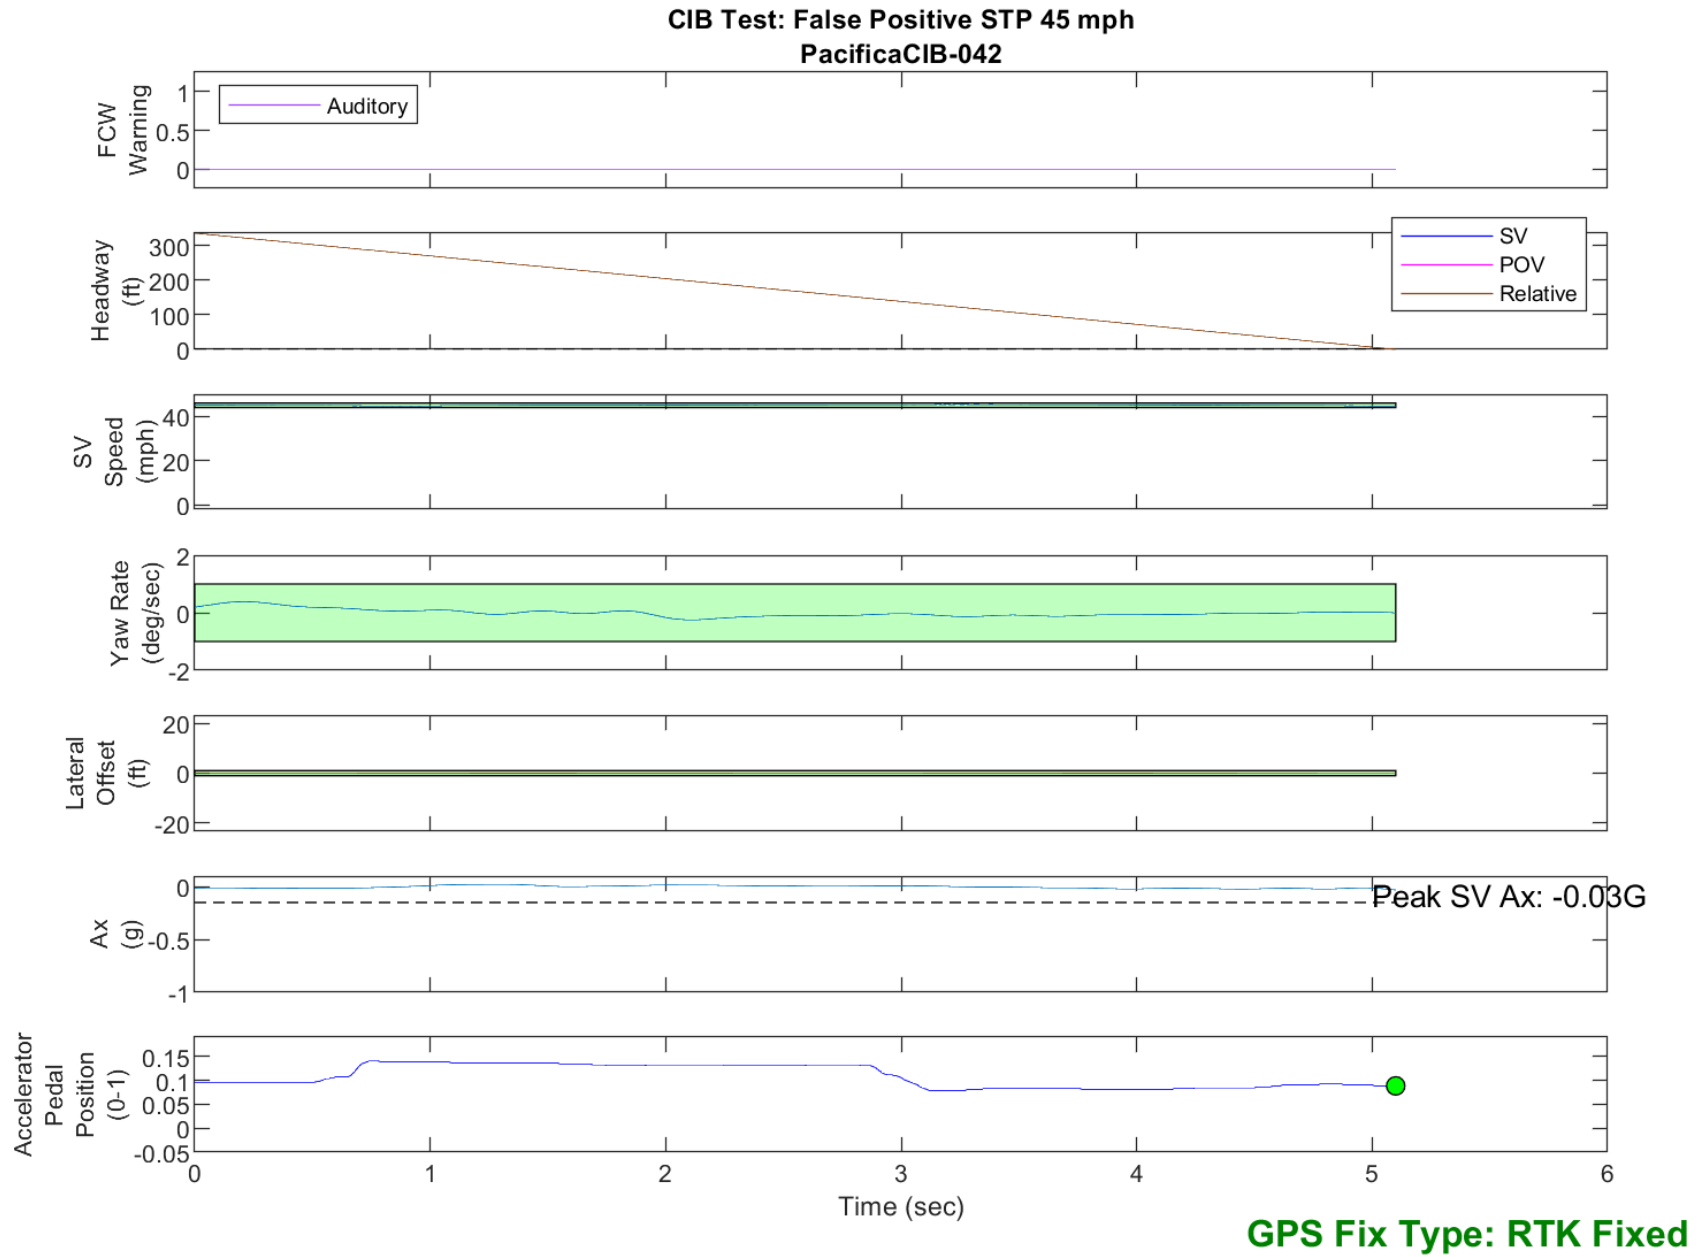


Figure D41. Time History for CIB Run 42, SV Encounters Steel Trench Plate, SV 45 mph

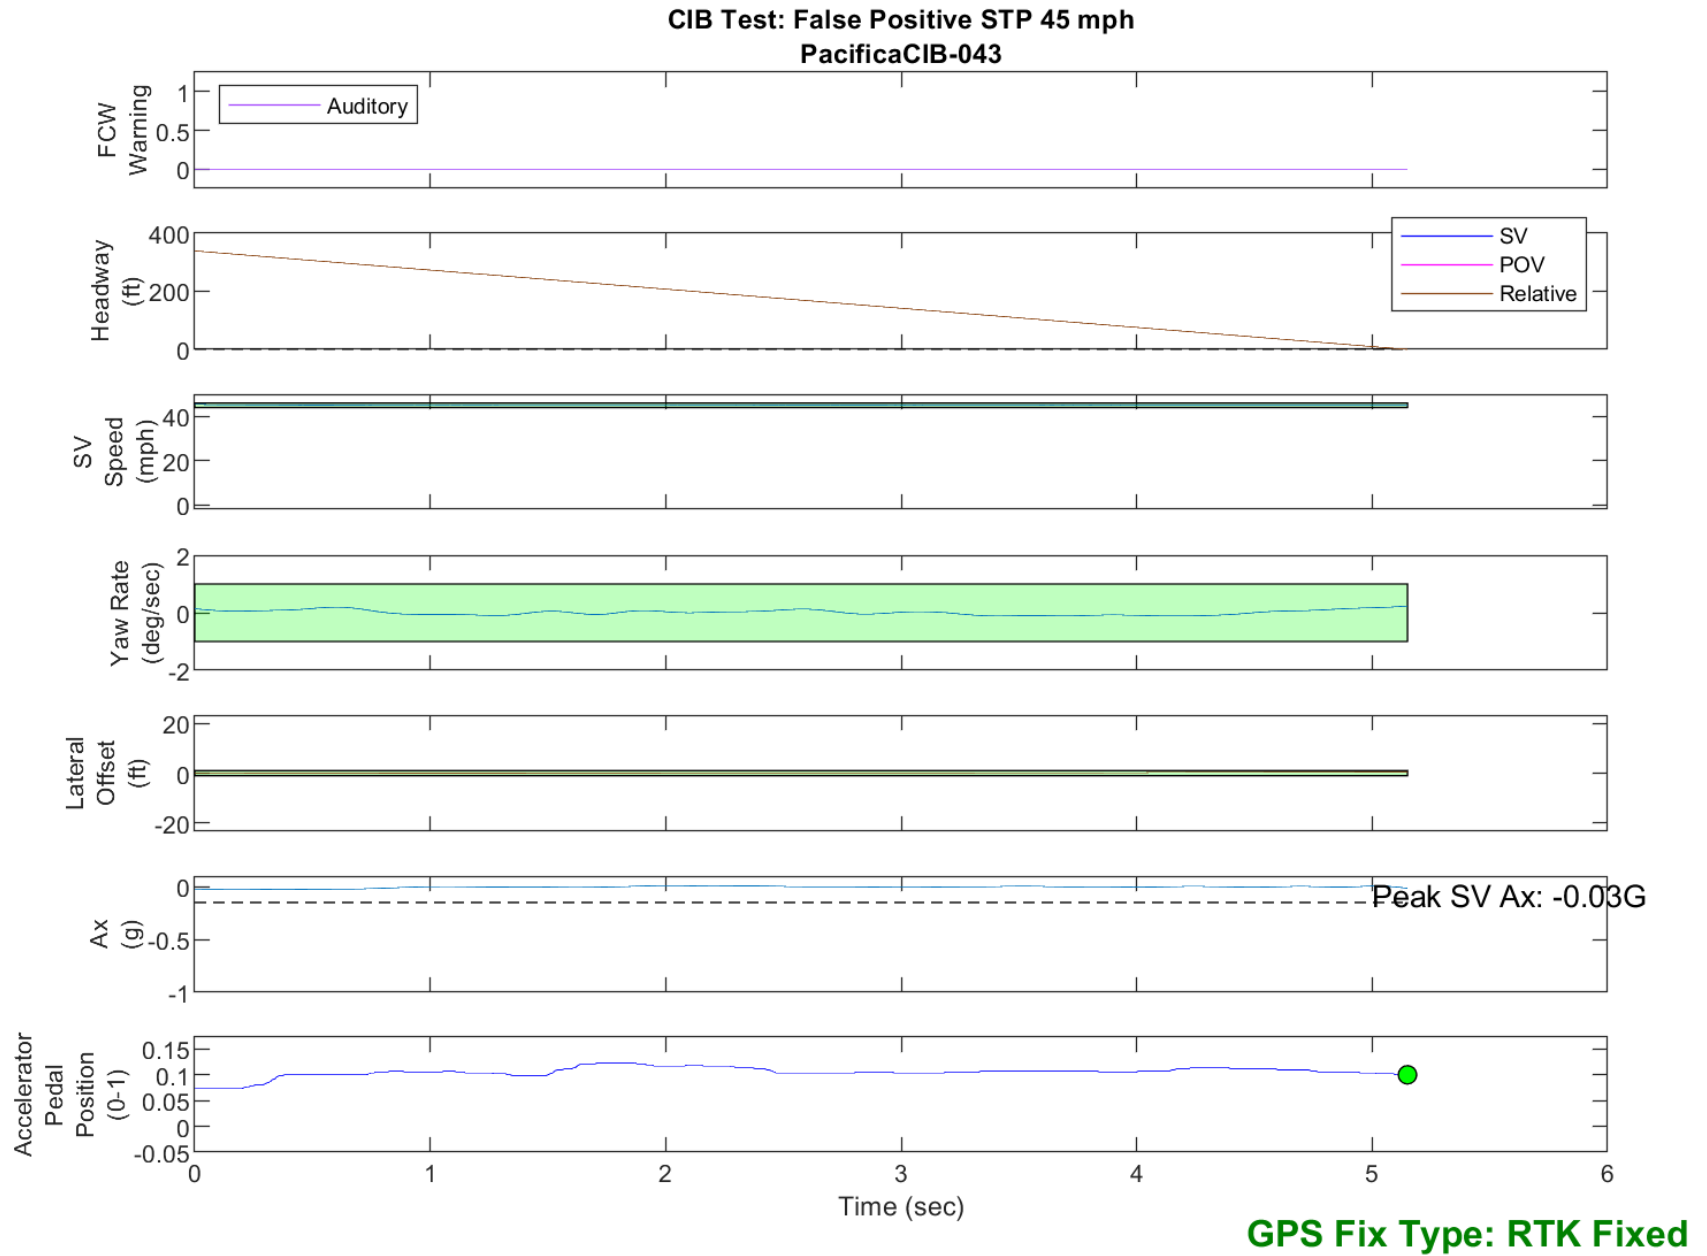


Figure D42. Time History for CIB Run 43, SV Encounters Steel Trench Plate, SV 45 mph

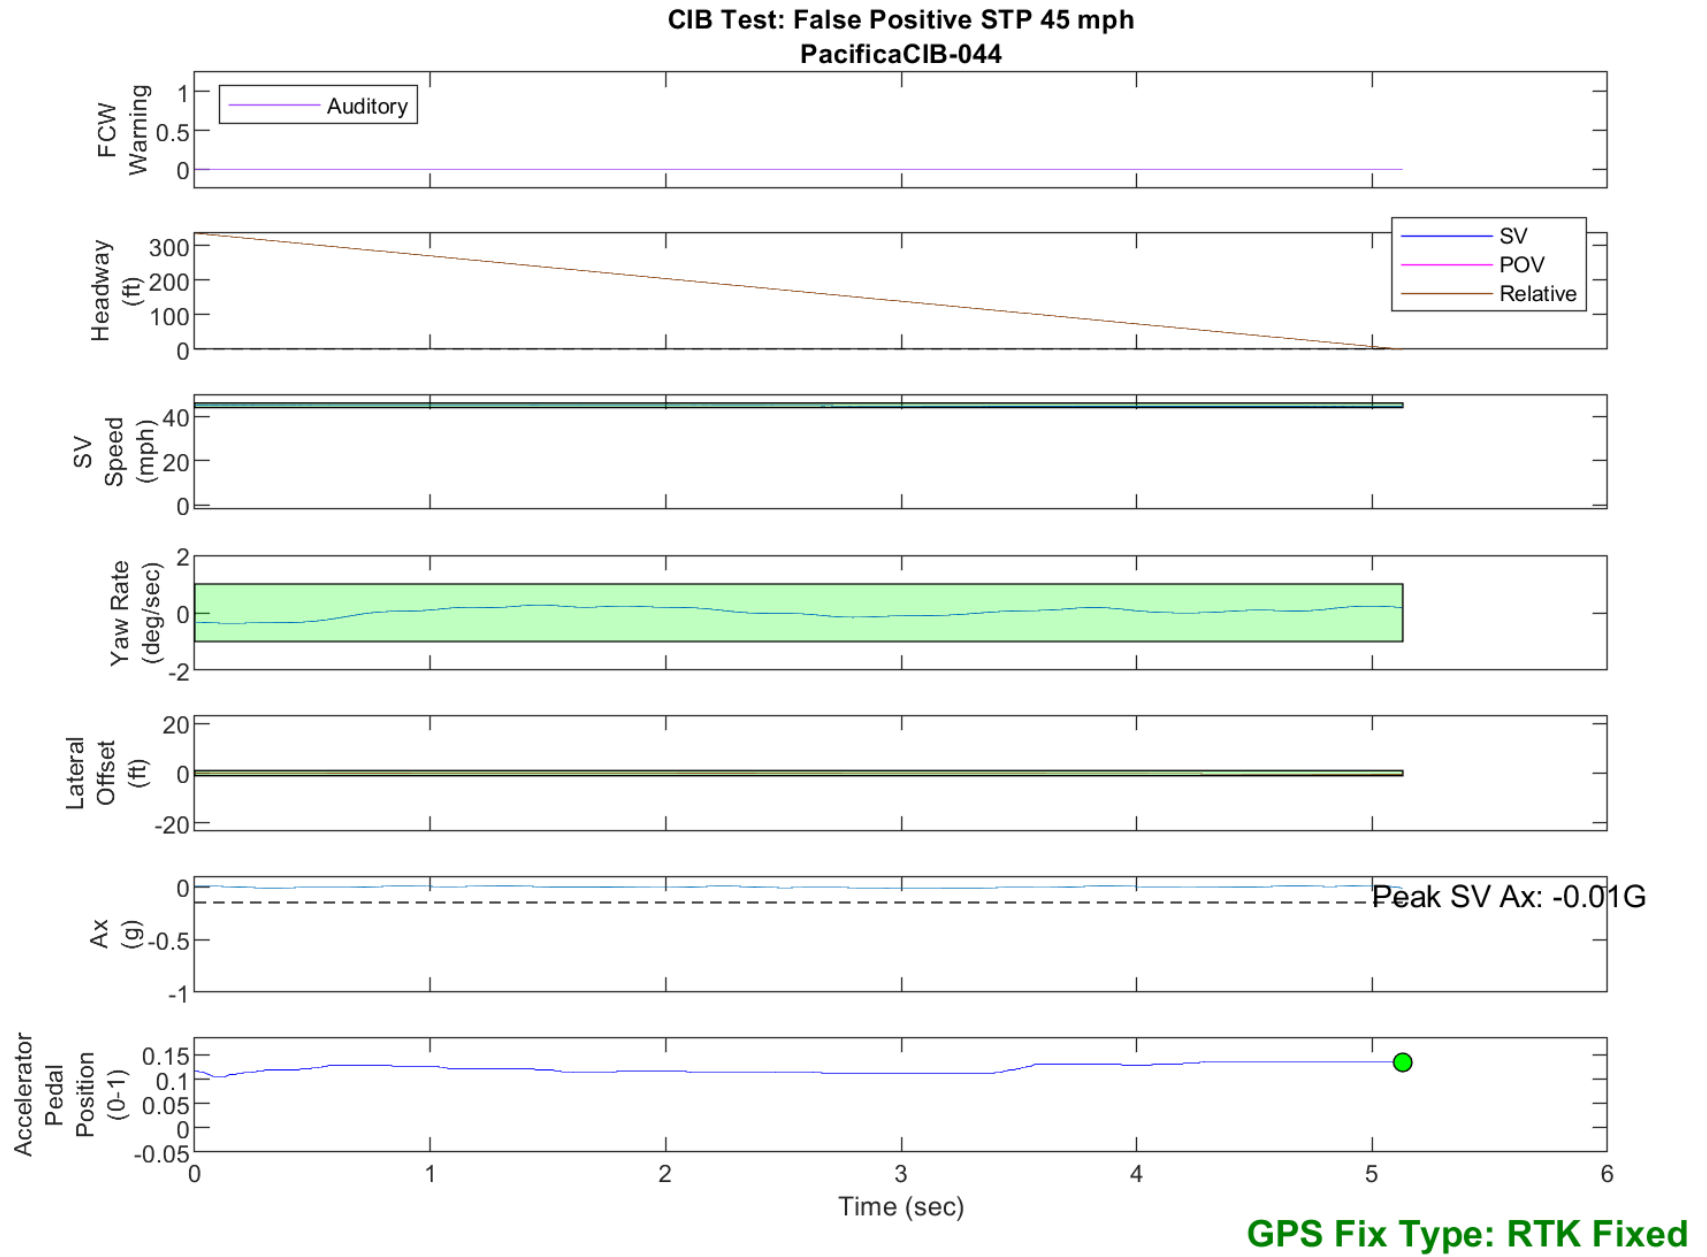


Figure D43. Time History for CIB Run 44, SV Encounters Steel Trench Plate, SV 45 mph

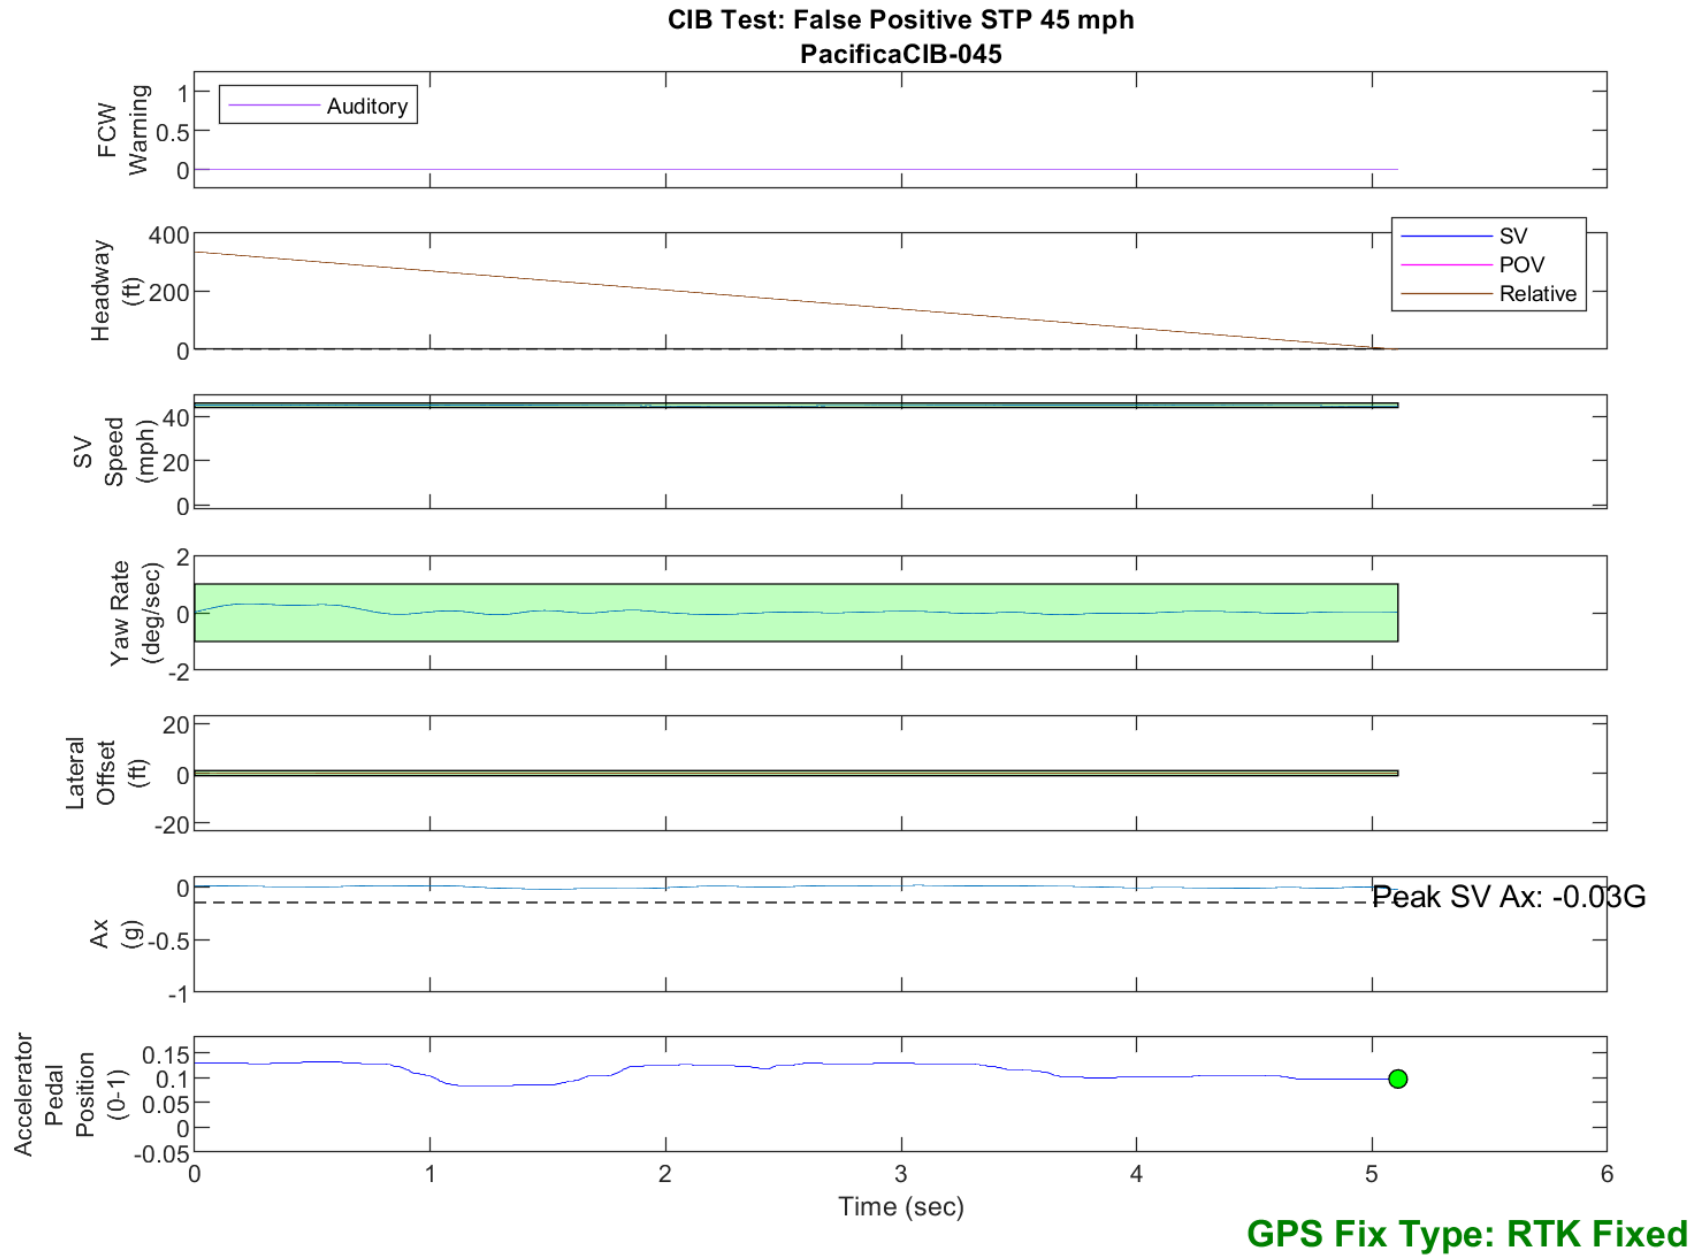


Figure D44. Time History for CIB Run 45, SV Encounters Steel Trench Plate, SV 45 mph

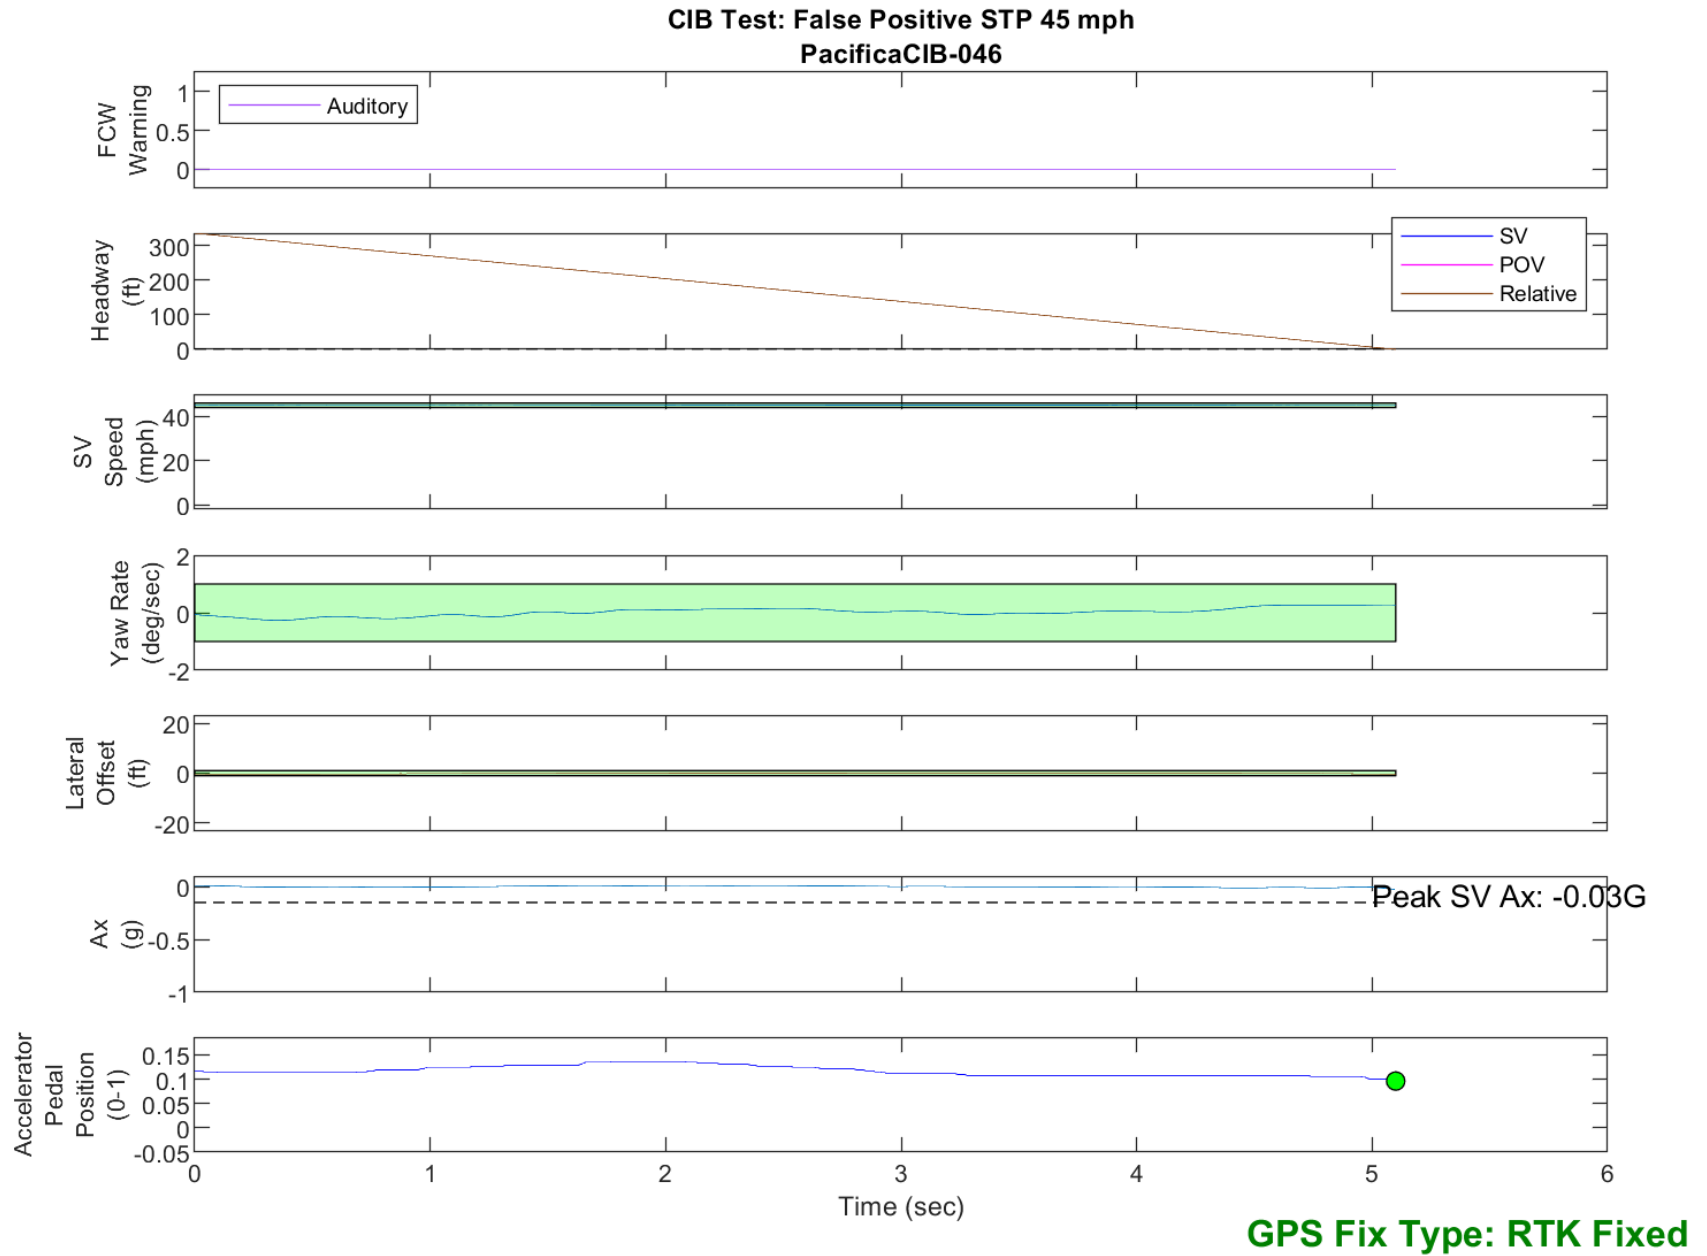


Figure D45. Time History for CIB Run 46, SV Encounters Steel Trench Plate, SV 45 mph