

REPORT NUMBER: SINCAP-CAL-21-007

**NEW CAR ASSESSMENT PROGRAM (NCAP)
MOVING DEFORMABLE BARRIER SIDE IMPACT TEST**

**Nissan Motor Co. LTD
2021 Nissan Rogue Sport
Five Door SUV**

NHTSA No: M20215207

**PREPARED BY:
CALSPAN CORPORATION
P.O. BOX 400
BUFFALO, NEW YORK 14225**



June 18, 2021

FINAL REPORT

**PREPARED FOR:
U.S. DEPARTMENT OF TRANSPORTATION
NATIONAL HIGHWAY TRAFFIC SAFETY ADMINISTRATION
OFFICE OF CRASHWORTHINESS STANDARDS
MAIL CODE: NRM-100
1200 NEW JERSEY AVE SE, ROOM W43-410
WASHINGTON, D.C. 20590**

This final test report was prepared for the U.S. Department of Transportation, National Highway Traffic Administration, in response to Contract Number DTNH22-14-D-00352.

This publication is distributed by the U.S. Department of Transportation, National Highway Traffic Safety Administration, in the interest of information exchange. The opinions, findings and conclusions expressed in this publication are those of the author(s) and not necessarily those of the Department of Transportation or the National Highway Traffic Safety Administration. The United States Government assumes no liability for its contents or use thereof.

If trade or manufacturers' names or products are mentioned it is only because they are considered essential to the object of the publication and should not be construed as an endorsement. The United States Government does not endorse products or manufacturers.

Prepared by: Matthew Pronko
Matthew Pronko, Test Engineer

Date: June 18, 2021

Approved by: Vanessa Hansen
Vanessa Hansen, Operations Manager

Date: June 18, 2021

FINAL REPORT ACCEPTANCE BY OCWS:

Division Chief, New Car Assessment Program
NHTSA, Office of Crashworthiness Standards

Date: _____

COTR, New Car Assessment Program
NHTSA, Office of Crashworthiness Standards

Date: _____

TECHNICAL REPORT DOCUMENTATION PAGE

1. Report No. SINCAP-CAL-21-007	2. Government Accession No.	3. Recipient's Catalog No.																												
4. Title and Subtitle Final Report of New Car Assessment Program Side Impact MDB Testing of a 2021 Nissan Rogue Sport SUV NHTSA No.: M20215207		5. Report Date June 18, 2021																												
		6. Performing Organization Code CAL																												
7. Authors Matthew Pronko, Test Engineer Vanessa Hansen, Operations Program Manager		8. Performing Organization Report No. CAL-DOT-2021-007																												
9. Performing Organization Name and Address Calspan Corporation Transportation Test Operations P.O. Box 400 Buffalo, New York 14225		10. Work Unit No.																												
		11. Contract or Grant No. DTNH22-14-D-00352																												
12. Sponsoring Agency Name and Address U.S. Department of Transportation National Highway Traffic Safety Administration Office of Crashworthiness Standards (NRM-100) 1200 New Jersey Ave., SE, Room W43-410 Washington, D.C. 20590		13. Type of Report and Period Covered: Final Test Report March 16, 2021 - June 18, 2021																												
		14. Sponsoring Agency Code NRM-100																												
15. Supplementary Notes																														
16. Abstract A 55/28, (61.90kph / 38.5 mph), 90 ^o Moving Deformable Barrier NCAP Side Impact Test was conducted on the subject 2021 Nissan Rogue Sport SUV in accordance with the specifications of the Office of Crashworthiness Standards Test Procedure for the generation of consumer information on vehicle side crash protection. This test was conducted at Calspan Corporation's Transportation Test Operations facility in Buffalo, New York on March 16, 2021. The impact velocity of the Moving Deformable Barrier (MDB) was 61.89 km/h, and the ambient temperature at the struck (driver's) side of the target vehicle at the time of impact was 21°C. The target vehicle's maximum post-test static crush was 239 mm located at level 3. The test vehicle's occupant performance data is as follows:																														
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th rowspan="2" style="width: 55%;">Measurement Description</th> <th colspan="3" style="text-align: center;">Driver ATD (ES-2re)</th> </tr> <tr> <th style="width: 10%;">Units</th> <th style="width: 10%;">IARV</th> <th style="width: 25%;">Result</th> </tr> </thead> <tbody> <tr> <td>Head Injury Criteria (HIC₃₆)</td> <td>N/A</td> <td>1000</td> <td style="background-color: yellow;">106.340</td> </tr> <tr> <td>Maximum Thoracic Rib Deflection</td> <td>mm</td> <td>44</td> <td style="background-color: yellow;">23.645</td> </tr> <tr> <td>Total Abdominal Force</td> <td>N</td> <td>2500</td> <td style="background-color: yellow;">694.065</td> </tr> <tr> <td>Pubic Symphysis Force</td> <td>N</td> <td>6000</td> <td style="background-color: yellow;">1816.299</td> </tr> </tbody> </table>				Measurement Description	Driver ATD (ES-2re)			Units	IARV	Result	Head Injury Criteria (HIC ₃₆)	N/A	1000	106.340	Maximum Thoracic Rib Deflection	mm	44	23.645	Total Abdominal Force	N	2500	694.065	Pubic Symphysis Force	N	6000	1816.299				
Measurement Description	Driver ATD (ES-2re)																													
	Units	IARV	Result																											
Head Injury Criteria (HIC ₃₆)	N/A	1000	106.340																											
Maximum Thoracic Rib Deflection	mm	44	23.645																											
Total Abdominal Force	N	2500	694.065																											
Pubic Symphysis Force	N	6000	1816.299																											
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th rowspan="2" style="width: 55%;">Measurement Description</th> <th colspan="3" style="text-align: center;">Passenger ATD (SID-IIs)</th> </tr> <tr> <th style="width: 10%;">Units</th> <th style="width: 10%;">IARV</th> <th style="width: 25%;">Result</th> </tr> </thead> <tbody> <tr> <td>Head Injury Criteria (HIC₃₆)</td> <td>N/A</td> <td>1000</td> <td style="background-color: yellow;">211.200</td> </tr> <tr> <td>Lower Spine Resultant Acceleration</td> <td>G</td> <td>82</td> <td style="background-color: yellow;">37.521</td> </tr> <tr> <td>Total Pelvic Force (sum of acetabular and iliac forces)</td> <td>N</td> <td>5525</td> <td style="background-color: yellow;">2242.599</td> </tr> <tr> <td>Maximum Thoracic Rib Deflection</td> <td>mm</td> <td>38*</td> <td style="background-color: yellow;">18.057</td> </tr> <tr> <td>Maximum Abdominal Rib Deflection</td> <td>mm</td> <td>45*</td> <td style="background-color: yellow;">15.240</td> </tr> </tbody> </table>				Measurement Description	Passenger ATD (SID-IIs)			Units	IARV	Result	Head Injury Criteria (HIC ₃₆)	N/A	1000	211.200	Lower Spine Resultant Acceleration	G	82	37.521	Total Pelvic Force (sum of acetabular and iliac forces)	N	5525	2242.599	Maximum Thoracic Rib Deflection	mm	38*	18.057	Maximum Abdominal Rib Deflection	mm	45*	15.240
Measurement Description	Passenger ATD (SID-IIs)																													
	Units	IARV	Result																											
Head Injury Criteria (HIC ₃₆)	N/A	1000	211.200																											
Lower Spine Resultant Acceleration	G	82	37.521																											
Total Pelvic Force (sum of acetabular and iliac forces)	N	5525	2242.599																											
Maximum Thoracic Rib Deflection	mm	38*	18.057																											
Maximum Abdominal Rib Deflection	mm	45*	15.240																											
<p><i>* Proposed IARV</i></p> <p>The two doors on the struck side of the vehicle did not separate from the body at the hinges or latches and the opposite doors did not open during the side impact event.</p>																														
17. Key Words New Car Assessment Program (NCAP) Side Impact MDB ES-2re SID-IIs		18. Distribution Statement Copies of this report are available from: National Highway Traffic Safety Administration Technical Information Services Division, 1200 New Jersey Ave. SE Washington, D.C. 20590																												
19. Security Class. (of this report) UNCLASSIFIED	20. Security Class. (of this page) UNCLASSIFIED	21. No. of Pages 194	22. Price																											

TABLE OF CONTENTS

<u>Section</u>		<u>Page</u>
1	Test Purpose and Procedure	1-1
2	Summary of Test Results	2-1
3	Occupant and Vehicle Information	3-1
 <u>Data Sheet</u>		 <u>Page</u>
1	General Test and Vehicle Parameter Data	3-2
2	Seat, Seat Belt, Steering Wheel Adjustment and Fuel System Data	3-6
3	Dummy Longitudinal Clearance Dimensions	3-10
4	Dummy Lateral Clearance Dimensions	3-11
5	Camera and Instrumentation Data	3-12
6	Test Vehicle Accelerometer Locations	3-13
7	MDB Accelerometer Locations	3-14
8	Post-Test Observations	3-15
9	MDB Summary of Results	3-17
10	Test Vehicle Profile Measurements	3-18
11	Test Vehicle Exterior Crush Measurements	3-19
12	MDB Exterior Static Crush Measurements	3-22
13	Vehicle and MDB Damage Profile Distances	3-23
14	FMVSS No. 301 Static Rollover Results	3-24
15	Dummy/Vehicle Temperature and Humidity Stabilization Data	3-25
 <u>Appendix</u>		 <u>Page</u>
A	Photographs	A-1
B	Vehicle and Dummy Response Data Plots	B-1
C	Dummy Configuration and Performance Verification Data	C-1
D	Test Equipment and Instrumentation Calibration Data	D-1

SECTION 1

TEST PURPOSE AND PROCEDURE

This moving deformable barrier side impact test is part of the MY 2021 New Car Assessment Program Side Impact Test Program, sponsored by the National Highway Traffic Safety Administration (NHTSA), under contract number DTNH22-14-D-00352. The purpose of this test is to generate comparative side impact performance in a 2021 Nissan Rogue Sport SUV. The side impact test was conducted in accordance with the Office of Crashworthiness Standard's Laboratory Test Procedure dated March 2020.

SECTION 2

SUMMARY OF TEST RESULTS

A 2021 Nissan Rogue Sport SUV was impacted on the left (driver's) side by a Moving Deformable Barrier (MDB) which was moving forward in a 27° crabbed position to the tow road guidance system at a velocity of 61.89 km/h. The target vehicle was stationary and was positioned at an angle of 63° to the line of forward motion. The side impact test was conducted by the Calspan Corporation's Transportation Test Operations Center in Buffalo, New York on March 16, 2021. Pre-test and post-test photographs of the test vehicle, the MDB and the dummies (ES-2re and SID-IIs) are included in this report.

Dummies were placed in the driver and left rear designated seating positions according to instructions specified in the OCWS Side Impact Laboratory Test Procedure, dated March 2020. The side impact event was documented by 9 high-speed and 2 real-time cameras. Camera locations are included in this report.

The Dummies were instrumented in the following manner:

DRIVER ATD (ES-2re)

Primary and redundant head CG tri-axial accelerometers

Chest upper rib, middle rib, and lower rib y-axis displacement potentiometers

Abdomen forward, middle, and rear y-axis load cells

Lower spine (T12) tri-axial accelerometers

Public symphysis y-axis load cell

PASSENGER ATD (SID-IIs)

Primary and redundant head CG tri-axial accelerometers

Chest upper rib, middle rib, and lower rib y-axis displacement potentiometers

Abdomen upper rib and lower rib y-axis displacement potentiometers

Lower spine (T12) tri-axial accelerometers

Acetabulum and iliac wing y-axis load cells

Appendix B contains the vehicle and dummy response data. Dummy configuration and performance verification data can be found in APPENDIX C of this report. Appendix D of this report contains the test equipment and instrumentation calibration data.

DUMMY INJURY VALUES

Measurement Description	Driver ATD (ES-2re)		
	Units	Threshold	Result
Head Injury Criteria (HIC36)		1000	106.340
Maximum Thorax Rib Deflection	mm	44	23.645
Combined Abdominal Force	N	2500	694.065
Pubic Symphysis Force	N	6000	1816.299

Measurement Description	Passenger ATD (SID-IIs)		
	Units	Threshold	Result
Head Injury Criteria (HIC36)		1000	211.200
Lower Spine (T12) Resultant Acceleration	G	82	37.521
Total Pelvic Force (sum of acetabular and iliac forces)	N	5525	2242.599
Maximum Thoracic Rib Deflection	mm	38*	18.057
Maximum Abdominal Rib Deflection	mm	45*	15.240

*Proposed IARV

SUPPLEMENTAL RESTRAINT INFORMATION

Restraint Type	Left Front (Driver) Occupant Location 1		Left Rear (Passenger) Occupant Location 4	
	Mounted	Deployed	Mounted	Deployed
Frontal Air bag	Yes	Yes		
Knee Air bag	Yes	Yes		
Side Air bag 1 - Curtain	Yes	Yes	Yes	Yes
Side Air bag 2 – Torso/Pelvis Air bag	Yes	Yes	Yes	Yes
Seat Belt Pretensioner	Yes	Yes	Yes	Yes
Seat Belt Load Limiter	Yes	Yes	Yes	Yes
Other				

GENERAL COMMENTS:

1. P1 serial number – F033
2. P4 serial number – 300

Data Anomalies:

The following channel was questionable for

- Left Front Sill Y Acceleration, Exceeded calibration range at 12.8 ms
- Left B-Pillar Lower Y Acceleration, Exceeded calibration range and saturated at 16.9 ms
- Left Rear Seat Track/Structure Y Acceleration, Exceeded calibration range at 12.1 ms

SECTION 3
OCCUPANT AND VEHICLE INFORMATION

This section contains information reporting for the following Data Sheets:

Data Sheet No. 1 - General Test and Vehicle Parameter Data

Data Sheet No. 2 – Seat, Seat Belt, Steering Wheel Adjustment and Fuel System Data

Data Sheet No. 3 – Dummy Longitudinal Clearance Dimensions

Data Sheet No. 4 – Dummy Lateral Clearance Dimensions

Data Sheet No. 5 – Camera and Instrumentation Data

Data Sheet No. 6 – Test Vehicle Accelerometer Locations

Data Sheet No. 7 – MDB Accelerometer Locations

Data Sheet No. 8 – Post-Test Observations

Data Sheet No. 9 – MDB Summary of Results

Data Sheet No. 10 – Test Vehicle Profile Measurements

Data Sheet No. 11 – Test Vehicle Exterior Crush Measurements

Data Sheet No. 12 – MDB Exterior Static Crush Measurements

Data Sheet No. 13 – Vehicle and MDB Damage Profile Distances

Data Sheet No. 14 – FMVSS No. 301 Static Rollover Results

Data Sheet No. 15 – Dummy/Vehicle Temperature and Humidity Stabilization Data

**DATA SHEET NO. 1
GENERAL TEST AND VEHICLE PARAMETER DATA**

Test Vehicle: 2021 Nissan Rogue Sport SUV
 Test Program: NCAP Side MDB Impact Test

NHTSA No.: M20215207
 Test Date: 3/16/2021

TEST VEHICLE INFORMATION AND OPTIONS

NHTSA No.	M20215207
Model Year	2021
Make	Nissan
Model	Rogue Sport
Body Style	SUV
VIN	JN1BJ1AV1MW301985
Body Color	Gray
Odometer Reading (km/mi)	153 mi
Engine Displacement (L)	2.0
Type/No. Cylinders	I4
Engine Placement	Transverse
Transmission Type	Automatic
Transmission Speeds	CVT
Overdrive	Yes
Final Drive	Front Wheel Drive
Roof Rack	No
Sunroof/T-Top	No
Running Boards	No
Tilt Steering Wheel	Yes
Power Seats	No
Anti-Lock Brakes (ABS)	Yes

Traction Control System (TCS)	Yes
Auto-Leveling System	No
Automatic Door Locks (ADL)	Yes
Power Window Auto-Reverse	No
Other Optional Feature	-
Driver Front Air bag	Yes
Driver Curtain Air bag	Yes
Driver Head/Torso Air bag	No
Driver Torso Air bag	No
Driver Torso/Pelvis Air bag	Yes
Driver Pelvis Air bag	No
Driver Knee Air bag	Yes
Rear Pass. Curtain Air bag	Yes
Rear Pass. Head/Torso Air bag	No
Rear Pass. Torso Air bag	No
Rear Pass. Torso/Pelvis Air bag	Yes
Rear Pass. Pelvis Air bag	No
Driver Seat Belt Pretensioners	Yes
Rear Pass. Seat Belt Pretensioners	Yes
Driver Load Limiter	Yes
Rear Pass. Load Limiter	Yes
Other Safety Restraint	-

Does owner's manual provide instructions to turn off automatic door locks? No

DATA FROM CERTIFICATION LABEL

Manufactured By	Nissan Motor Co. LTD
Date of Manufacture	12/20
Vehicle Type	Passenger Car

GVWR (kg)	1975
GAWR Front (kg)	1055
GAWR Rear (kg)	941

VEHICLE SEATING AND WEIGHT CAPACITY DATA

Measured Parameter	Front	Rear	Third	Total	
Designated Seating Capacity (DSC)	2	3	N/A	5	
Capacity Weight (VCW) (kg)				408	(A)
DSC X 68.04 kg				340.2	(B)
Cargo Weight (RCLW) (kg)				67.8	(A-B)

VEHICLE SEAT TYPE


Seating Location	Type of Seat Pan				Type of Seat Back		
	Bucket	Bench	Split Bench	Contoured	Fixed	Adjustable	
						W/ Lever	W/ Knob
Front Seat	X					X	
Rear or Second Row Seat			X		X		
Third Row seat							

DATA SHEET NO. 1 ... (CONTINUED)
GENERAL TEST AND VEHICLE PARAMETER DATA

Test Vehicle: 2021 Nissan Rogue Sport SUV NHTSA No.: M20215207
 Test Program: NCAP Side MDB Impact Test Test Date: 3/16/2021

VEHICLE TIRE INFORMATION

Collected for year, make, model, & VIN, all items circled in red, tire manufacturer and tire name.

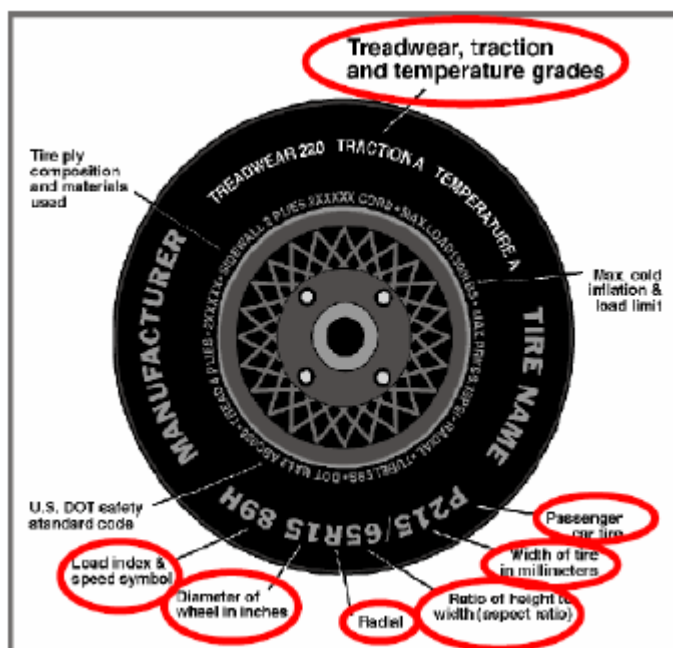

TIRE SIDEWALL INFORMATION

Measured Parameter	Front	Rear
Maximum Tire Pressure (kPa)	300	300
Cold Pressure (kPa)	230	230
Recommended Tire Size	215/60R17	215/60R17
Tire Size on Vehicle	215/60R17	215/60R17
Tire Manufacturer	Bridgestone	Bridgestone
Tire Model	Ecopia H/L 422 Plus	Ecopia H/L 422 Plus
Treadwear	600	600
Traction	A	A
Temperature Grade	A	A
Tire Plies Sidewall	2 Polyester	2 Polyester
Tire Plies Body	1 Polyester, 2 Steel, 1 Nylon	1 Polyester, 2 Steel, 1 Nylon
Load Index/Speed Symbol	96H	96H
Tire Material	Rubber	Rubber
DOT Safety Code Left	ELERJKL5020	ELERJKL5020
DOT Safety Code Right	ELERJKL5020	ELERJKL5020

DATA SHEET NO. 1 ... (CONTINUED)
GENERAL TEST AND VEHICLE PARAMETER DATA

Test Vehicle: 2021 Nissan Rogue Sport SUV NHTSA No.: M20215207
 Test Program: NCAP Side MDB Impact Test Test Date: 3/16/2021

TIRE PRESSURES

	Units	LF	RF	LR	RR
As Delivered	kPa	308	310	307	309
Tire Placard	kPa	230	230	230	230
Owner's Manual	kPa	230	230	230	230
As Tested	kPa	230	230	230	230

MDB TIRE SPECIFICATIONS

	Units	Requirement	LF	RF	LR	RR
Tire Size		P205/75R15	P205/75R15	P205/75R15	P205/75R15	P205/75R15
Tire Pressure	kPa	200 ± 21	207	207	207	207

TEST VEHICLE WEIGHTS

	Units	As Delivered (UVW)			As Tested (ATW)			Fully Loaded		
		Front	Rear	Total	Front	Rear	Total	Front	Rear	Total
Left	kg	448	300		486	371		488	363	
Right	kg	450	282		467	343		475	346	
Ratio	%	60.7	39.3		57	43		57.6	42.4	
Totals	kg	898	582	1480	953	714	1667	963	709	1672

TARGET TEST WEIGHT CALCULATION

Measured Parameter	Units	Value	
Total Delivered Weight (UVW)	kg	1480	(A)
Sum of Actual Weight of 1 ES2re and 1 P572 ATD (SID-IIs)	kg	127	(B)
Rated Cargo / Luggage Weight (RCLW)	kg	67.8	(C)
Calculated Target Vehicle Test Weight (TVT _W)	kg	1674.8	(A+B+C)

Does the measured As Test Vehicle Weight lie within the required weight range
 (i.e. Calculated Test Vehicle Target Weight – 4.5 kg to – 9 kg)? Yes No

TEST VEHICLE ATTITUDES AND CG

Measurement Description	Units	Fully Loaded	As Tested	Meets Requirement**
LF	mm	821	814	Yes
RF	mm	822	820	Yes
RR	mm	834	826	Yes
LR	mm	824	821	Yes
Vehicle CG (Aft of Front Axle)	mm	1130	1133	
Vehicle CG (Left+)/Right(-) from Longitudinal Centerline)	mm	14	22	

*** The "As Tested" vehicle attitude measurements must be equal to or within ± 10mm of the "Fully Loaded" vehicle attitude measurements at each wheel well. Indicate "Yes" or "No" for "Meets Requirements".

Test height adjustable suspension setting, if applicable: N/A

DATA SHEET NO. 1 ... (CONTINUED)
GENERAL TEST AND VEHICLE PARAMETER DATA

Test Vehicle:	<u>2021 Nissan Rogue Sport SUV</u>	NHTSA No.:	<u>M20215207</u>
Test Program:	<u>NCAP Side MDB Impact Test</u>	Test Date:	<u>3/16/2021</u>

WEIGHT OF BALLAST AND VEHICLE COMPONENTS REMOVED TO MEET TVTW

Component Description	Weight (kg)
Trunk Carpeting	3
Spare Tire	10
Jack	2
Ballast / Equipment Added	
	34

TEST SURFACE MARKINGS

	Distance from 63° Impact Angle Line (mm)
Fore 25 mm target	880
Aft 25 mm target	880
Pre-Impact Angle Line	236

Parallel Track Target	X Location (mm)	Y Location (mm)
A	0	0
B	2955	1555
C	2955	1555
D	0	3000

DATA SHEET NO. 2
SEAT, SEAT BELT, STEERING WHEEL ADJUSTMENT AND FUEL SYSTEM DATA

Test Vehicle: 2021 Nissan Rogue Sport SUV NHTSA No.: M20215207
 Test Program: NCAP Side MDB Impact Test Test Date: 3/16/2021

SEAT POSITIONING

The driver's seat, front center seat (if applicable), and right front passenger's seat should be set to the mid-track, lowest, mid-angle position. The struck-side rear passenger's seat, rear center seat, and non-struck side rear passengers' seats should be set to the rear-most, lowest, mid-angle position.

SCRL ANGLE RANGE

Seat	SCRL (°)		
	Max	Min	Mid
Driver Seat	14.6	11.6	13.1
Front Passenger Seat	Not Adjustable		
Front Center Seat*	N/A	N/A	N/A
Struck Side Rear Seat	Fixed	Fixed	Fixed
Non-Struck Side Rear Seat	Fixed	Fixed	Fixed
Rear Center Seat*	Fixed	Fixed	Fixed

*if applicable

SEAT HEIGHT AND ANGLE

Seat	As Tested SCRL Angle (Mid) (°)	As Tested SCRP Height (mm)	SCRP Height Position	SCRP Height (mm)		
				Rearmost	Mid-Fore/Aft	Forward-Most
Driver Seat	13.1	32	Max	-	-	-
			Mid	23	32	41
			Min	-	-	-
Front Passenger Seat	Not Adjustable		Max	-	-	-
			Mid	-	-	-
			Min	-	-	-
Front Center Seat*	N/A	N/A	Max	-	-	-
			Mid	-	-	-
			Min	-	-	-
Struck Side Rear Seat	Fixed	Fixed	Max	-	-	-
			Mid	-	-	-
			Min	-	-	-
Non-Struck Side Rear Seat	Fixed	Fixed	Max	-	-	-
			Mid	-	-	-
			Min	-	-	-
Rear Center Seat*	Fixed	Fixed	Max	-	-	-
			Mid	-	-	-
			Min	-	-	-

*if applicable

DATA SHEET NO. 2 ... (CONTINUED)
SEAT, SEAT BELT, STEERING WHEEL ADJUSTMENT AND FUEL SYSTEM DATA

Test Vehicle:	<u>2021 Nissan Rogue Sport SUV</u>	NHTSA No.:	<u>M20215207</u>
Test Program:	<u>NCAP Side MDB Impact Test</u>	Test Date:	<u>3/16/2021</u>


SEAT FORE / AFT POSITION

Seat	Total Fore / Aft Travel		Test Position from Forwardmost Position	
	mm	Detents*	mm	Detent*
Driver Seat	240	25 (0-24)	120	12
Front Passenger Seat	240	25 (0-24)	120	12
Front Center Seat*	N/A	N/A	N/A	N/A
Struck Side Rear Seat	Fixed	Fixed	Fixed	Fixed
Non-Struck Side Rear Seat	Fixed	Fixed	Fixed	Fixed
Rear Center Seat*	Fixed	Fixed	Fixed	Fixed

**if applicable*

SEAT BACK ANGLE ADJUSTMENT

The driver's seat back is positioned to the manufacturer's designated design angle. The front center and front passenger's seat backs are positioned in a similar manner as the driver's seat back. The struck side rear seat back is positioned such that the dummy's head is level. The rear center and non-struck side rear outboard seat backs are positioned in a similar manner as the struck-side rear seat back.

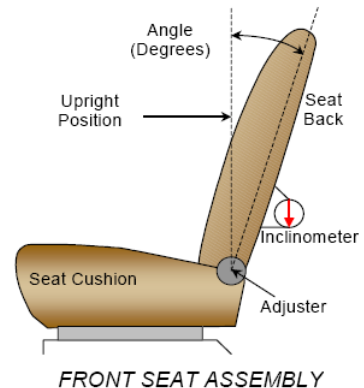

Seat	Total Seat Back Angle Range		Test Position from Most Upright	
	Degrees	Detents*	Degrees	Detents*
Driver Seat w/ Seated Dummy	58.1	21 (0-20)	+4.7	8
Front Passenger Seat	39	21 (0-20)	+5.3	8
Front Center Seat*	N/A	N/A	N/A	N/A
Struck Side Rear Seat w/ Seated Dummy	Fixed	Fixed	Fixed	Fixed
Non-Struck Side Rear Seat	Fixed	Fixed	Fixed	Fixed
Rear Center Seat*	Fixed	Fixed	Fixed	Fixed

**if applicable*

DATA SHEET NO. 2 ... (CONTINUED)
SEAT, SEAT BELT, STEERING WHEEL ADJUSTMENT AND FUEL SYSTEM DATA

Test Vehicle: 2021 Nissan Rogue Sport SUV NHTSA No.: M20215207
 Test Program: NCAP Side MDB Impact Test Test Date: 3/16/2021

SEAT BELT ANCHORAGE ADJUSTMENT

Seat belt anchorages are adjusted in accordance with the information provided by the manufacturer on Form No. 1. For this test zero is defined as the uppermost position.

	Total # of Positions	Placed in Position #
Driver Seat	4 (0-3)	0
Rear Seat	Fixed	Fixed

HEAD RESTRAINT ADJUSTMENT


The driver's head restraint is adjusted to the highest and most full forward in-use position. The struck-side rear passenger's head restraint is adjusted to the lowest and most full forward in-use position.

	Total # of Positions	Placed in Position #
Driver Seat	3 (0-2)	Uppermost
Rear Seat	2 (0-1)	Lowermost

STEERING COLUMN ADJUSTMENT

Steering wheel and column adjustments are made so that the steering wheel hub is at the center of its geometric locus it describes when it moves through its full range of motion.


	Degrees	Fore/Aft Position (mm)
Lowermost – Position 1	24.5	
Geometric Center – Position 2	26.8	
Uppermost – Position 3	29.1	
Telescoping Steering Wheel Travel		46
Test Position	26.8	23



FUEL PUMP

Describe the fuel pump type, details about how it operates, and the location of the fuel filler neck.

The vehicle is equipped with an electric fuel pump. The fuel filler neck is on the right side of the vehicle. The pump creates positive pressure in the fuel lines, pushing the gasoline to the engine. See form 1 for more information.

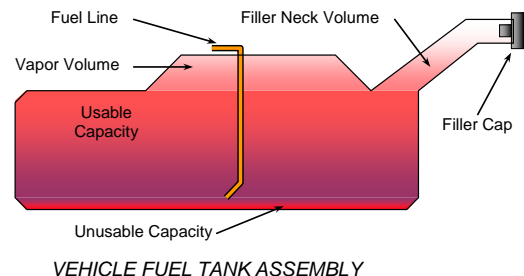

DATA SHEET NO. 2 ... (CONTINUED)
SEAT, SEAT BELT, STEERING WHEEL ADJUSTMENT AND FUEL SYSTEM DATA

Test Vehicle: 2021 Nissan Rogue Sport SUV NHTSA No.: M20215207
 Test Program: NCAP Side MDB Impact Test Test Date: 3/16/2021

FUEL TANK CAPACITY


	Liters
Usable Capacity of "Standard Tank" (see Form No. 1)	55.0
Usable Capacity of "Optional Tank" (see Form No. 1)	N/A
Usable Capacity of Standard Tank (see Owner's Manual)	55.0
Usable Capacity of Optional Tank (see Owner's Manual)	N/A
93% of Usable Capacity	51.1
Actual Amount of Solvent Used in Test	50.9
1/3 of Usable Capacity	18.3

Is the Actual Amount of Solvent Used in the test equal to 93% ± 1% of the Usable Capacity stated in Form No. 1? **Yes** **No**

**DATA SHEET NO. 3
DUMMY LONGITUDINAL CLEARANCE DIMENSIONS**

Test Vehicle: 2021 Nissan Rogue Sport SUV
 Test Program: NCAP Side MDB Impact Test

NHTSA No.: M20215207
 Test Date: 3/16/2021

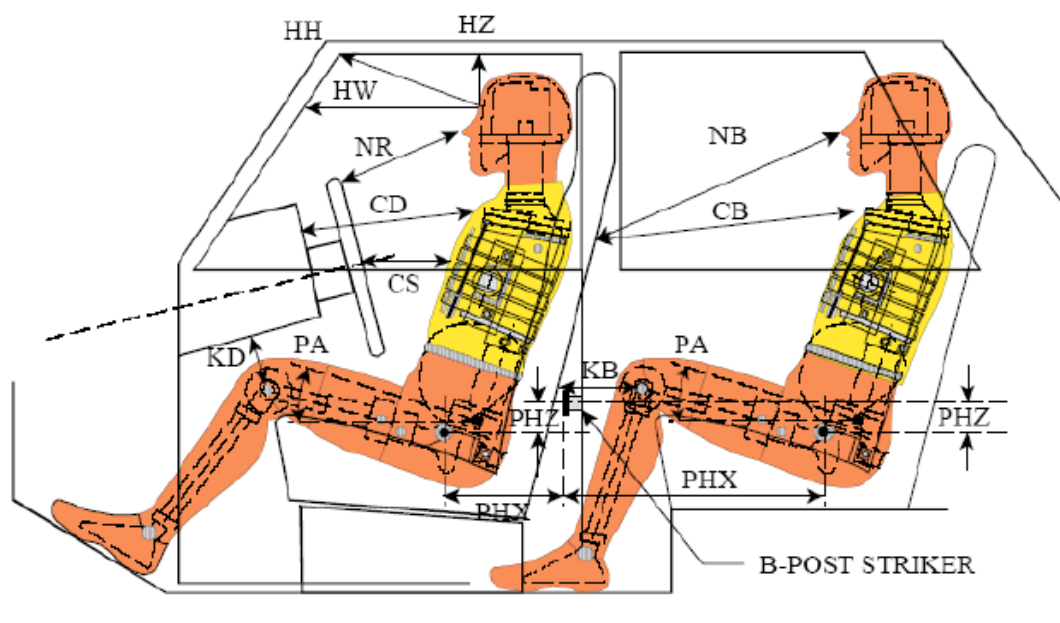

LEFT SIDE VIEW

NOTE: 2-DOOR VEHICLE SHOWN.
 REAR DUMMY PHX & PHZ
 MEASUREMENTS FOR A 4-DOOR
 VEHICLE WOULD USE THE C-POST
 STRIKER AS A REFERENCE POINT


DUMMY LONGITUDINAL CLEARANCE DIMENSION INFORMATION

Driver Code	Pass. Code	Description	Driver (Serial No. F033)		Passenger (Serial No.300)	
			Length (mm)	Angle	Length (mm)	Angle
HH		Header to Header	335			
HW		Header to Windshield	641			
HZ	HZ	Head to Roof Liner	142		280	
NR	NB	Nose to Rim/Seat Back	452		543	
CD	CB	Chest to Dash/Seat Back	580		578	
CS		Chest to Steering Wheel	354			
KD(L)/KDA(L)°	KB(L)/KBA(L)°	Left Knee to Dash/Seat Back	112	31.8	308	15.8
KD(R)/KDA(R)°	KB(R)/KBA(R)°	Right Knee to Dash/Seat Back	110	8.1	307	15.8
PAX°	PAX°	Pelvic Tilt Angle X		23.2		18.6
	PAY°	Pelvic Tilt Angle Y				0.4
PHX	PHX	Hip Point to Striker (X-Axis)	277		283	
PHZ	PHZ	Hip Point to Striker (Z-Axis)	114		307	

**DATA SHEET NO. 4
DUMMY LATERAL CLEARANCE DIMENSIONS**

Test Vehicle: 2021 Nissan Rogue Sport SUV
 Test Program: NCAP Side MDB Impact Test

NHTSA No.: M20215207
 Test Date: 3/16/2021

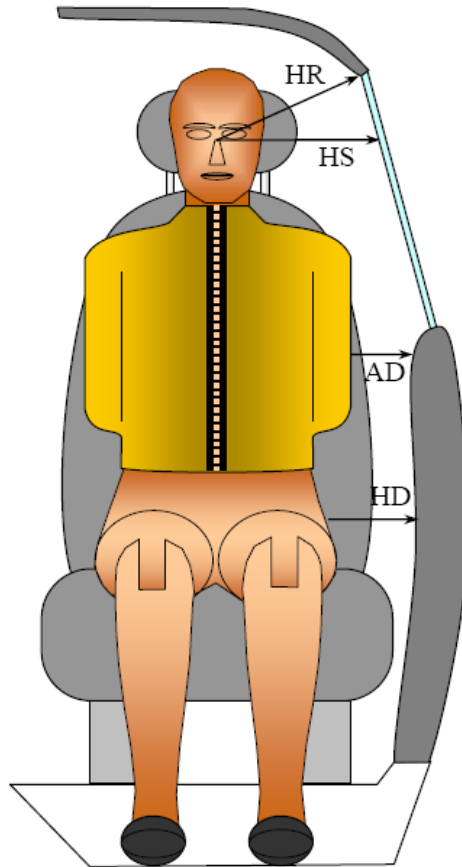

FRONT VIEW OF DUMMY


DUMMY LATERAL CLEARANCE DIMENSION INFORMATION

Code	Measurement Description	Units	Driver (Serial No. F033)	Passenger (Serial No. 300)
HR	Head to Side Header	mm	208	283
HS	Head to Side Window	mm	328	395
AD	Arm to Door	mm	90	179
HD	Hip Point to Door	mm	157	167

**DATA SHEET NO. 5
CAMERA AND INSTRUMENTATION DATA**

Test Vehicle: 2021 Nissan Rogue Sport SUV
 Test Program: NCAP Side MDB Impact Test

NHTSA No.: M20215207
 Test Date: 3/16/2021

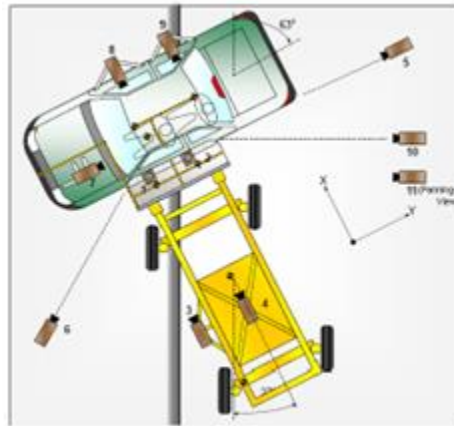

CAMERA LOCATIONS AND DATA

No.	Camera View	Coordinates (mm)			Lens Length (mm)	Operating Frame Rate (fps)
		X	Y	Z		
1	Overhead Overall	0	-230	-9806	12.5	1000
2	Overhead Close-up	0	0	-9806	28	1000
3	Left Impact Point (MDB)				25	1000
4	Side Overall (MDB)				8	1000
5	Rear	0	8819	-1448	28	1000
6	Left Front	-2690	-7177	-1544	24	1000
7	Driver Front (OB)				25	1000
8	Driver Side (OB)				12.5	1000
9	Passenger Side (OB)				12.5	1000
10	Real-time Left Rear				Zoom	60
11	Real-time In run				Zoom	60

Notes: Reference: Impact Point projected to Ground
 +X = To Front of MDB, +Y = To Right of MDB, +Z = Down
 *All measurements accurate to ± 6 mm.

If applicable, explain why camera(s) did not operate as intended: All cameras operated normally


INSTRUMENTATION

Driver Dummy Channels	16
Passenger Dummy Channels	16
Vehicle Structure Accelerometers	23
MDB Accelerometers	7
Total	62

**DATA SHEET NO. 6
TEST VEHICLE ACCELEROMETER LOCATIONS**

Test Vehicle: 2021 Nissan Rogue Sport SUV
 Test Program: NCAP Side MDB Impact Test

NHTSA No.: M20215207
 Test Date: 3/16/2021

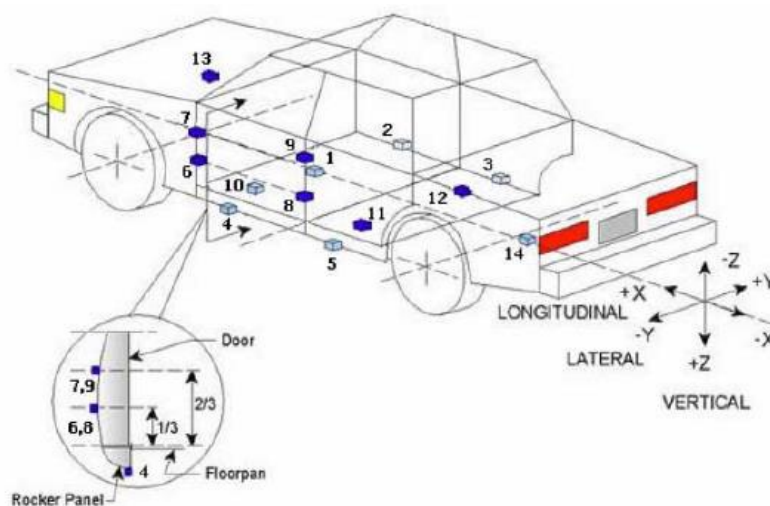

TEST VEHICLE ACCELEROMETER LOCATIONS


No.	Accelerometer Location	Coordinates (mm)		
		X	Y	Z
1	Vehicle CG	2333	-54	-85
2	Right Sill at Front Seat	2538	634	115
3	Right Sill at Rear Seat	1719	636	99
4	Left Sill at Front Door	2508	-641	114
5	Left Sill at Rear Door	1699	-641	98
6	A-Post Lower	3012	-609	-102
7	A-Post Middle	2901	-648	-673
8	B-Post Lower	1949	-680	-149
9	B-Post Middle	1879	-650	-546
10	Front Seat Track	2048	-542	114
11	Rear Seat Structure	1519	-641	59
12	Rt. Rear Occ. Compartment	1874	346	229
13	Engine Block	3611	156	-416
14	Rear Above Axle	907	22	-82

Reference: X – Rear surface of vehicle (+ forward)
 Y – Vehicle centerline (+ to right)
 Z – Ground plane (+ down)

**DATA SHEET NO. 7
MDB ACCELEROMETER LOCATIONS**

Test Vehicle: 2021 Nissan Rogue Sport SUV
 Test Program: NCAP Side MDB Impact Test

NHTSA No.: M20215207
 Test Date: 3/16/2021

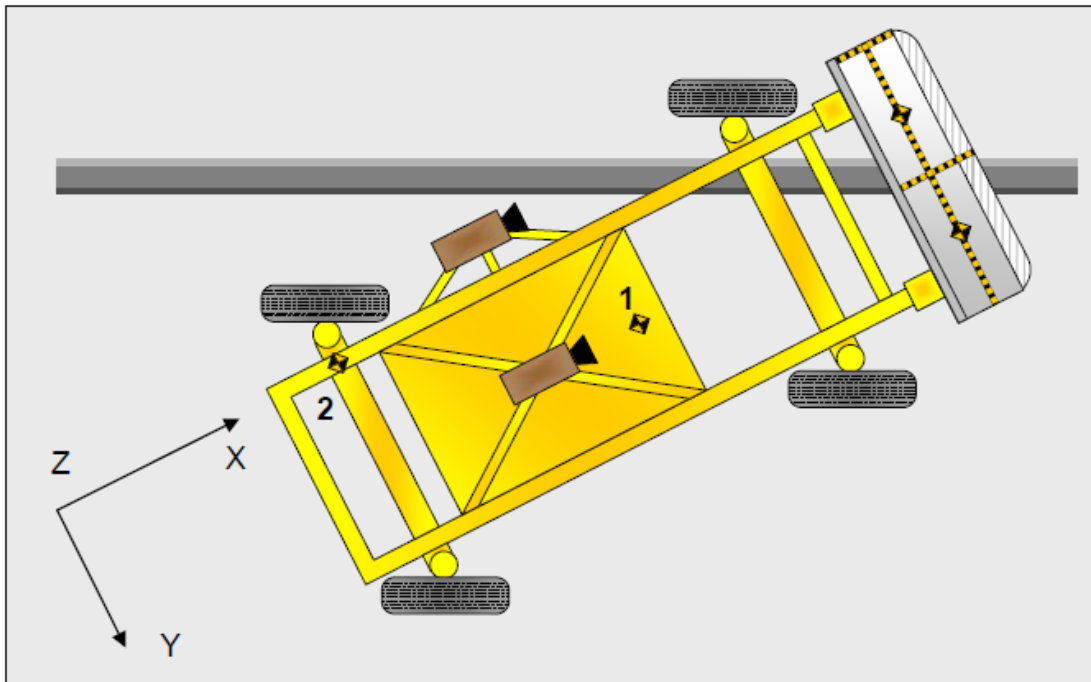

MDB ACCELEROMETER LOCATIONS

No.	Accelerometer Location	Coordinates (mm)		
		X	Y	Z
1	MDB CG	1859	0	-330
2	MDB Rear	386	-660	-660

*Reference: X – Face of MDB (+ forward)
 Y – MDB centerline (+ to right)
 Z – Ground plane (+ down)*

Width between left and right contact switches (mm):

1508

**DATA SHEET NO. 8
POST-TEST OBSERVATIONS**

Test Vehicle: 2021 Nissan Rogue Sport SUV NHTSA No.: M20215207
 Test Program: NCAP Side MDB Impact Test Test Date: 3/16/2021

TEST DUMMY INFORMATION AND CONTACT POINTS

Dummy Body Part	Front Seat Dummy (ES-2re)	Rear Seat Dummy (SID-IIs)
Face	Curtain Airbag	None
Top of Head	Side Header	Curtain Airbag
Left Side of Head	Curtain Airbag, Side Header	Curtain Airbag
Back of Head	Curtain Airbag, Headrest, Side Header	Headrest
Left Shoulder	Curtain Airbag	Curtain Airbag, Torso/Pelvis Airbag
Upper Torso	Seatback, Torso/Pelvis Airbag	Torso/Pelvis Airbag
Lower Torso	Seatback, Torso/Pelvis Airbag	Torso/Pelvis Airbag
Left Hip	Seatpan, Torso/Pelvis Airbag	Torso/Pelvis Airbag, Seatpan
Left Knee	Driver Door	Passenger Door

POST-TEST DOOR PERFORMANCE

Description	Struck Side		Non-Struck Side		Rear Hatch/ Other*
	Front	Rear	Front	Rear	
Remained Closed and Operational	No	No	Yes	Yes	Yes
Total Separation from Vehicle at Hinges or Latches	No	No	No	No	No
Latch or Hinge Systems Pulled Out of Their Anchorages	No	No	No	No	No
Disengaged from Latched Position	No	No	No	No	No
Latch Separated from Striker	No	No	No	No	No
Jammed Shut	Yes	Yes	No	No	No
If Door Opened at Striker, Width of Opening at Striker (mm)	0	0	0	0	0

POST-TEST SEAT PERFORMANCE

Description	Struck Side		Non-Struck Side	
	Front	Rear	Front	Rear
Seat Movement Along Seat Track	No	No	No	No
Seat Disengagement from Floor Pan	No	No	No	No
Seat Back Movement from Initial Position	No	No	No	No
Seat Back Collapse	No	No	No	No

POST-TEST STRUCTURAL OBSERVATIONS

Critical Areas of Performance	Observations and Conclusions
Pillar Performance	B-Pillar and C-Pillar buckled
Sill Separation	None
Windshield Damage	None
Side Window Damage	Rear window shattered
Other Notable Effects	Foot Parking brake disengaged during impact event

**DATA SHEET NO. 8 ... (CONTINUED)
POST-TEST OBSERVATIONS**

Test Vehicle: 2021 Nissan Rogue Sport SUV NHTSA No.: M20215207
 Test Program: NCAP Side MDB Impact Test Test Date: 3/16/2021

SUPPLEMENTAL RESTRAINT SYSTEM INFORMATION

Restraint Type	Struck Side Driver		Struck Side Rear Passenger	
	Mounted	Deployed	Mounted	Deployed
Frontal Air bag	Yes	Yes		
Knee Air bag	Yes	Yes		
Side Air bag 1 - Curtain	Yes	Yes	Yes	Yes
Side Air bag 2 - Torso/Pelvis Air bag	Yes	Yes	Yes	Yes
Seat Belt Pretensioner	Yes	Yes	Yes	Yes
Seat Belt Load Limiter	Yes	Yes	Yes	Yes
Other				

IMPACT POINT LOCATION DATA

Measured Parameter	Units	Tolerance	Value
Vehicle Wheel Base	mm		2645
Vertical Impact Reference Line (Aft of Front Axle - Intended Impact Point)	mm		382
Actual Impact Point (Aft of Frontal Axle)	mm		385
Horizontal Offset (+ forward / - rearward)	mm	+/- 50 of Intended Impact Point	-3
Vertical Offset (+ down / - up)	mm	+/- 20 of Intended Impact Point	-4

**DATA SHEET NO. 9
MDB SUMMARY OF RESULTS**

Test Vehicle: 2021 Nissan Rogue Sport SUV
 Test Program: NCAP Side MDB Impact Test

NHTSA No.: M20215207
 Test Date: 3/16/2021

MDB SPECIFICATIONS

Measurement Description	Length (mm)
Overall Width of Framework Carriage	1,250
Overall Length Including Honeycomb Frame	4,120
Wheelbase of Framework Carriage	2,600
CG Location of Front Axle	1,120

MDB WEIGHTS

	Units	Front Axle	Rear Axle	Total
Left	kg	392.5	297.5	690.0
Right	kg	386.0	291.5	677.5
Ratio	%	57.4%	42.6%	100.0%
Totals	kg	778.5	589.0	1367.5

SPEED AND ANGLE AT IMPACT DATA

Measured Parameter	Units	Requirement	Value
Trap No. 1 Velocity (Primary)	km/h	61.10 to 62.70	61.89
Trap No. 2 Velocity (Redundant)	km/h	61.10 to 62.70	61.89
MDB CL to Target Vehicle CL	degrees	88.5 to 91.5	90.0
MDB Forward Line of Motion to Target Vehicle CL	degrees	62.5 to 63.5	63.0
MDB Crabbed angle to MDB Forward Line of Motion	degrees	26.0 to 28.0	27.0


MAXIMUM STATIC CRUSH OF HONEYCOMB IMPACT FACE

Vertical Location			From Centerline		Maximum Crush (mm)
Row	Description	Height (mm)	Distance (mm)	Direction	
A	Center of Bumper	432	800	Right	206
B	Top of Bumper	533	800	Left	129
C	Mid-Level	686	800	Left	122
D	Top of Stack	813	800	Left	174

**DATA SHEET NO. 10
TEST VEHICLE PROFILE MEASUREMENTS**

Test Vehicle: 2021 Nissan Rogue Sport SUV
 Test Program: NCAP Side MDB Impact Test

NHTSA No.: M20215207
 Test Date: 3/16/2021

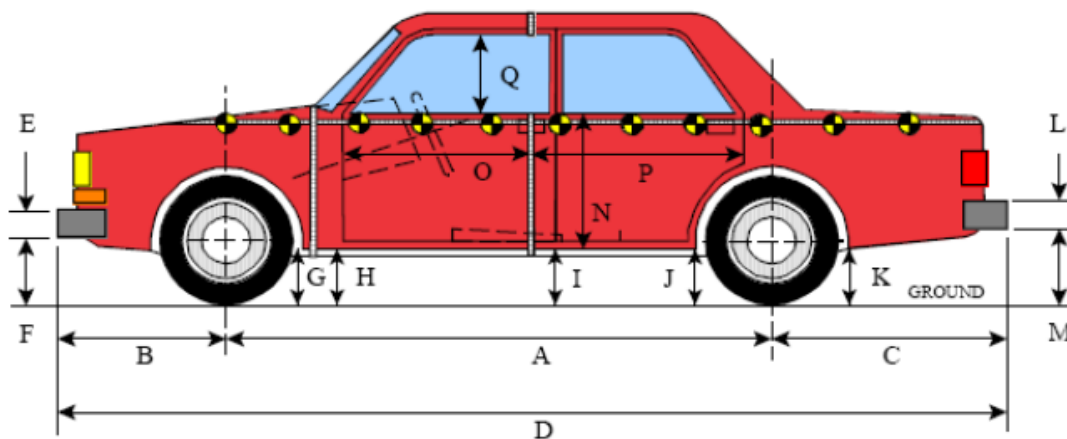

LEFT SIDE VIEW

All MEASUREMENTS IN (mm) WITH TOLERANCE OF ± 3 mm


VEHICLE PRE- AND POST-TEST MEASUREMENT INFORMATION

Code	Description	Pre-Test	Post-Test	Difference
A	Wheelbase	2645	2640	-5
B	Front Axle to FSOV	909	910	1
C	Rear Axle to RSOV	833	832	-1
D	Total Length at Centerline	4386	4382	-4
E	Front Bumper Thickness	115	115	0
F	Front Bumper Bottom to Ground	478	477	-1
G	Sill Height at Front Wheel Well	267	251	-16
H	Sill Height at Front Door Leading Edge	291	315	24
I	Sill Height at B Pillar	285	295	10
J1	Sill Height at Rear Wheel Well	290	300	10
J2	Pinch Weld Height at Rear Wheel Well	267	276	9
K	Sill Height Aft of Rear Wheel Well	301	295	-6
L	Rear Bumper Thickness	174	174	0
M	Rear Bumper Bottom to Ground	439	438	-1
N	Sill Height to Window Bottom of Front Window Sill	764	702	-62
O	Front Door Leading Edge to Impact CL	723	718	-5
P	Rear Door Trailing Edge to Impact CL	1354	1315	-39
Q	Front Window Opening	401	391	-10
R	Right Side Length	4303	4305	2
S	Left Side Length	4304	4300	-4
T	Maximum Vehicle Width	1791	1625	-166
U	Front Wheel Track Width	1592	1590	-2
V	Rear Wheel Track Width	1595	1592	-3

DATA SHEET NO. 11
TEST VEHICLE EXTERIOR CRUSH MEASUREMENTS

Test Vehicle: 2021 Nissan Rogue Sport SUV
 Test Program: NCAP Side MDB Impact Test

NHTSA No.: M20215207
 Test Date: 3/16/2021

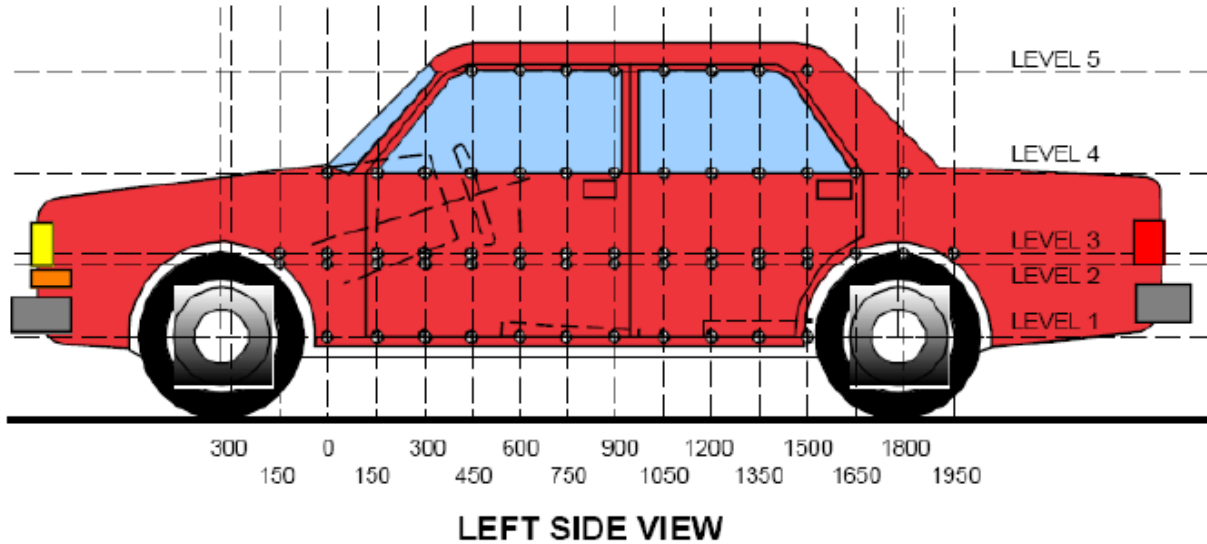

MAXIMUM EXTERIOR CRUSH MEASUREMENTS

Level	Measurement Description	Units	Height Above Ground	Maximum Exterior Static Crush	Distance from Impact
1	Sill Top	mm	370	89	1500
2	Driver Hip Point	mm	696	230	1650
3	Mid-Door	mm	794	239	1650
4	Window Sill	mm	1066	112	1500
5	Window Top	mm	1527	6	1800

*window top level bent outward from original position

NOTE: The above measurements should be taken along the vertical impact reference line. Vehicle measurements forward of the vertical impact reference line are negative.

DATA SHEET NO. 11 ... (CONTINUED)
TEST VEHICLE EXTERIOR CRUSH MEASUREMENTS

Test Vehicle: 2021 Nissan Rogue Sport SUV
 Test Program: NCAP Side MDB Impact Test

NHTSA No.: M20215207
 Test Date: 3/16/2021

EXTERIOR CRUSH MEASUREMENTS AT EACH LEVEL


	Pre-Test					Post-Test					Difference				
	1	2	3	4	5	1	2	3	4	5	1	2	3	4	5
-900															
-750															
-600															
-450															
-300			915					913					2		
-150			909	836				901	838				8	-2	
0		909	909	825			894	891	821			15	18	4	
150	897	902	898	814		821	764	791	817		76	138	107	-3	
300	900	899	897	815		819	702	712	813		81	197	185	2	
450	897	899	900	818		813	694	691	813		84	205	209	5	
600	893	899	901	825		808	688	684	818		85	211	217	7	
750	889	899	902	832		804	686	681	821		85	213	221	11	
900	884	898	902	837	636	797	691	680	823	640	87	207	222	14	-4
1050	879	896	901	843	640	793	693	705	827	640	86	203	196	16	0
1200	875	894	899	846	640	789	711	726	808	636	86	183	173	38	4
1350	875	892	896	849	638	789	687	680	754	633	86	205	216	95	5
1500	878	890	892	851	635	789	691	660	739	630	89	199	232	112	5
1650	881	895	892	852	628	797	665	653	779	624	84	230	239	73	4
1800	883	901	899	852	620	803	691	683	780	614	80	210	216	72	6
1950		907	903	853	605		853	797	804	604		54	106	49	1
2100			909	870	584			884	868	586			25	2	-2
2250			917	870	551			905	856	554			12	14	-3
2400				859					852					7	
2550															
2700															
2850															
3000															

NOTE: Pre-test measurements are taken when the vehicle is in the "As Tested" weight condition.
 Vehicle measurements forward of the vertical impact reference line are negative.
 The crush profile grid is established prior to test based on an estimated impact point.

DATA SHEET NO. 11 (CONTINUED)
TEST VEHICLE EXTERIOR CRUSH MEASUREMENTS

Test Vehicle: 2021 Nissan Rogue Sport SUV
 Test Program: NCAP Side MDB Impact Test

NHTSA No.: M20215207
 Test Date: 3/16/2021

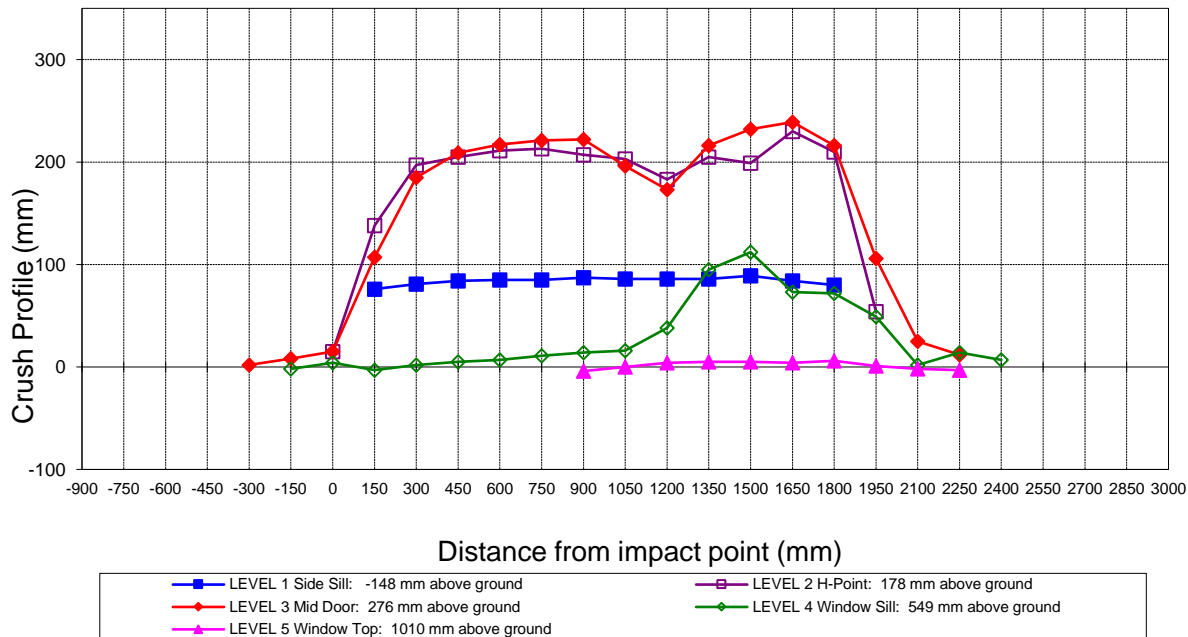


Vehicle Exterior Crush Measurements - Visual Representation

**DATA SHEET NO. 12
MDB EXTERIOR STATIC CRUSH MEASUREMENTS**

Test Vehicle: 2021 Nissan Rogue Sport SUV
 Test Program: NCAP Side MDB Impact Test

NHTSA No.: M20215207
 Test Date: 3/16/2021

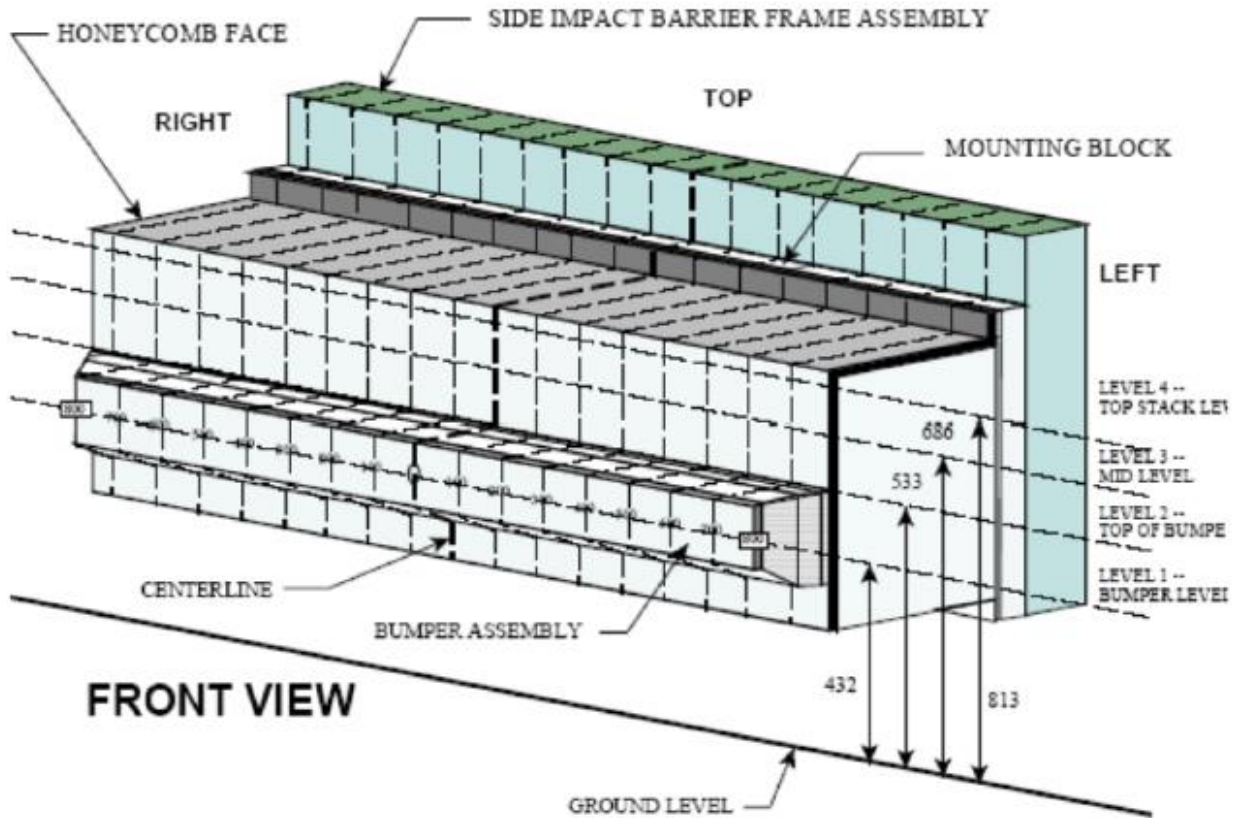

NOTE: Dimensions are shown in millimeters, mm

DEFORMABLE BARRIER STATIC CRUSH


Stack Level	Distance Right of Center								C/L	Distance Left of Center							
	800	700	600	500	400	300	200	100		0	100	200	300	400	500	600	700
1	206	195	192	191	191	193	185	182	180	178	177	176	174	174	173	176	182
2	102	100	99	98	97	95	90	89	87	83	82	80	80	78	77	81	129
3	38	24	26	36	37	48	66	50	29	28	25	27	33	40	51	70	122
4	45	28	20	24	43	71	88	62	57	57	67	73	73	85	89	111	174

**DATA SHEET NO. 13
VEHICLE AND MDB DAMAGE PROFILE DISTANCES**

Test Vehicle: 2021 Nissan Rogue Sport SUV
 Test Program: NCAP Side MDB Impact Test

NHTSA No.: M20215207
 Test Date: 3/16/2021

For guidance regarding damage profile distance measurements, please refer to the latest version of the *NHTSA Test Reference Guide, Volume 1: Vehicle Tests*.

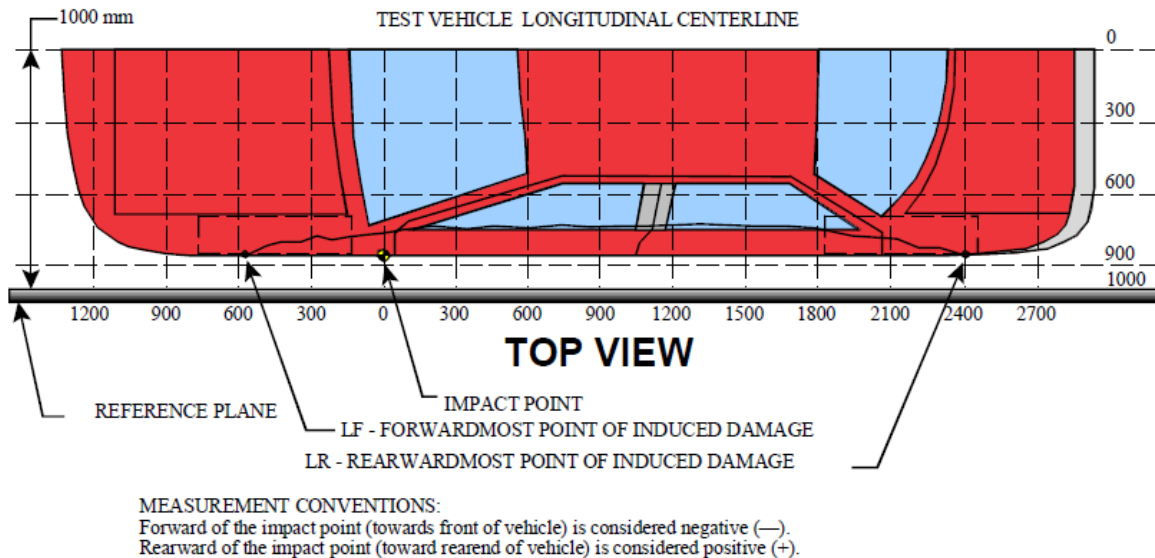

VEHICLE DAMAGE PROFILE DISTANCES

DPD	Distance From Impact Point (mm)	Level	Post-Test (mm)	Pre-Test (mm)	Crush (mm)
1	-300	3	87	85	2
2	210	3	241	102	139
3	720	3	318	98	220
4	1230	3	283	102	181
5	1740	3	329	104	225
6	2250	3	95	83	12

MDB DAMAGE PROFILE DISTANCES

DPD	Distance From Center of MDB	Level	Post-Test (mm)*
1	800 mm left of center	1	182
2	480 mm left of center	1	174
3	160 mm left of center	1	177
4	160 mm right of center	1	184
5	480 mm right of center	1	191
6	800 mm right of center	1	206

**DATA SHEET NO. 14
FMVSS NO. 301 STATIC ROLLOVER RESULTS**

Test Vehicle:	<u>2021 Nissan Rogue Sport SUV</u>	NHTSA No.:	<u>M20215207</u>
Test Program:	<u>NCAP Side MDB Impact Test</u>	Test Date:	<u>3/16/2021</u>
Test Time:	<u>11:25 AM</u>	Temperature:	<u>21°C</u>

- | | | |
|---|-----------------------------|-----|
| A. From impact until vehicle motion ceases:
(Maximum allowable is 1 oz.) | <u>0</u> | oz. |
| B. For the 5-minute period after motion ceases:
(Maximum allowable is 5 oz.) | <u>0</u> | oz. |
| C. For the following 25 minutes:
(Maximum allowable is 1 oz./minute) | <u>0</u> | oz. |
| D. Spillage Details: | <u>No Spillage Occurred</u> | |

FMVSS NO. 301 STATIC ROLLOVER DATA



ROLLOVER SOLVENT COLLECTION TIME TABLE IN SECONDS

Test Phase	Rotation Time	Hold Time	Total Time
0° to 90°	70	300	370
90° to 180°	68	300	368
180° to 270°	64	300	364
270° to 360°	67	300	367

FMVSS NO. 301 ROLLOVER SPILLAGE TABLE

Test Phase	First 5 Minutes	Sixth Minute	Seventh Minute	Eighth Minute
0° to 90°	0	0	0	
90° to 180°	0	0	0	
180° to 270°	0	0	0	
270° to 360°	0	0	0	


ROLLOVER SOLVENT SPILLAGE LOCATION TABLE

Test Phase	Spillage Location
0° to 90°	None
90° to 180°	None
180° to 270°	None
270° to 360°	None

DATA SHEET NO. 15
DUMMY/VEHICLE TEMPERATURE AND HUMIDITY STABILIZATION DATA

Test Vehicle: 2021 Nissan Rogue Sport SUV
 Test Program: NCAP Side MDB Impact Test

NHTSA No.: M20215207
 Test Date: 3/16/2021

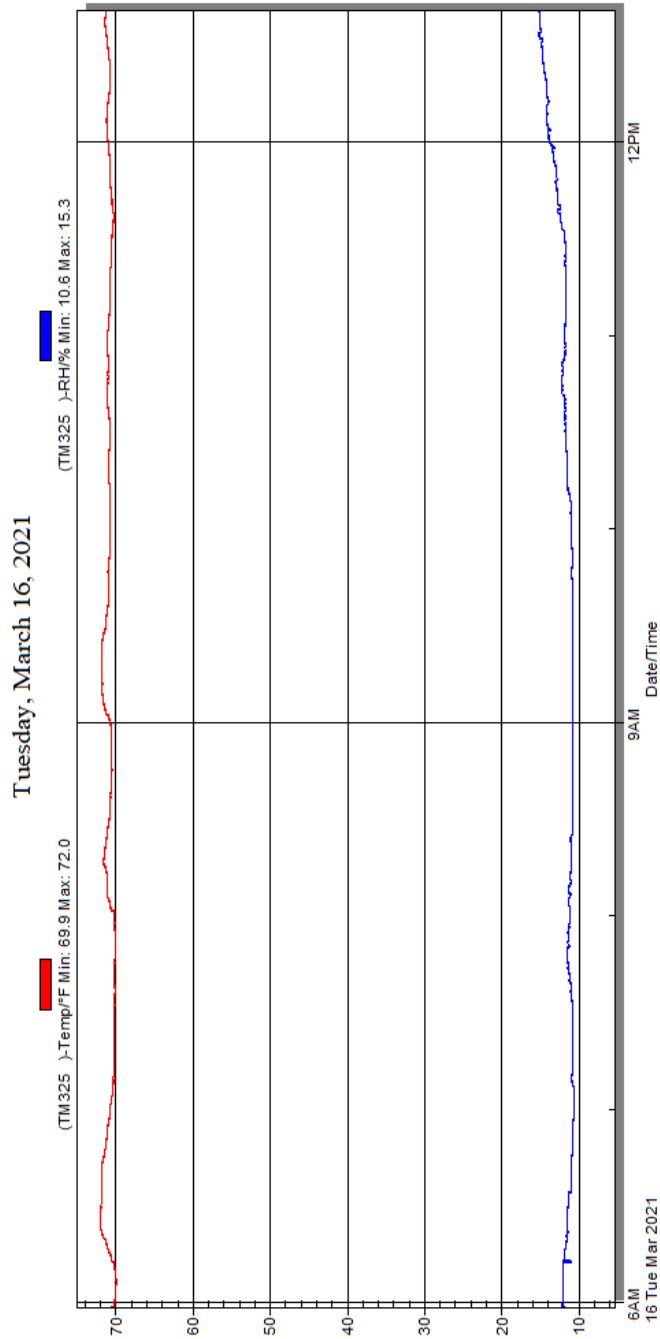

Temperature and Humidity Stabilization Chart/Data for Dummies and Test Vehicle

APPENDIX A
PHOTOGRAPHS

TABLE OF PHOTOGRAPHS

Fig.	Description	Page
1	As-Delivered Right Front 3/4 View of Test Vehicle	A-5
2	As-Delivered Left Rear 3/4 View of Test Vehicle	A-5
3	Pre-Test Frontal View of Test Vehicle	A-6
4	Post-Test Frontal View of Test Vehicle	A-6
5	Pre-Test Left Front 3/4 View of Test Vehicle	A-7
6	Post-Test Left Front 3/4 View of Test Vehicle	A-7
7	Pre-Test Left Side View of Test Vehicle	A-8
8	Post-Test Left Side View of Test Vehicle	A-8
9	Pre-Test Left Rear 3/4 View of Test Vehicle	A-9
10	Post-Test Left Rear 3/4 View of Test Vehicle	A-9
11	Pre-Test Rear View of Test Vehicle	A-10
12	Post-Test Rear View of Test Vehicle	A-10
13	Pre-Test Right Side View of Test Vehicle	A-11
14	Post-Test Right Side View of Test Vehicle	A-11
15	Pre-Test Overhead View of Test Area	A-12
16	Post-Test Overhead View of Test Area	A-12
17	Pre-Test Left Side View of MDB Positioned Against Side of Test Vehicle	A-13
18	Pre-Test Right Side View of MDB Positioned Against Side of Test Vehicle	A-13
19	Pre-Test Close-Up View of Impact Point Target	A-14
20	Post-Test Close-up View of Impact Point Target	A-14
21	Pre-Test Left Front Door Latch Close-Up	A-15
22	Post-Test Left Front Door Latch Close-Up	A-15
23	Pre-Test Left Rear Door Latch Close-Up	A-16
24	Post-Test Left Rear Door Latch Close-Up	A-16
25	Pre-Test Front Close-up View of Driver Dummy	A-17
26	Post-Test Front Close-up View of Driver Dummy	A-17
27	Pre-Test Left Side View of Driver Dummy Showing Belt and Chalking	A-18
28	Pre-Test Left Side View of Driver Dummy Shoulder and Door Top View	A-18
29	Post-Test Left Side View of Driver Dummy Shoulder and Door Top View	A-19
30	Pre-Test Frontal View of Driver Seat Back Prior to Dummy Positioning	A-19
31	Pre-Test Frontal View of Driver Dummy Head and Shoulders in Relation to Head Restraint	A-20
32	Pre-Test Frontal View of Driver Seat Pan Prior to Dummy Positioning	A-20
33	Pre-Test Overhead View of Driver Dummy Thighs on Seat Pan	A-21
34	Pre-Test Placement of Driver Dummy's Feet	A-21

Fig.	Description	Page
35	Pre-Test View of Belt Anchorage for Driver Dummy	A-22
36	Pre-Test Left Side View of Steering Wheel	A-22
37	View of Disengaged Parking Brake	A-23
38	Pre-Test View of Parking Brake	A-23
39	Pre-Test Close-Up Left Side View of Driver Seat Track	A-24
40	Pre-Test Close-Up Left Side View of Driver Seat Back	A-24
41	Pre-Test Close-Up View of Driver Seat Back or Head Restraint	A-25
42	Pre-Test Driver Dummy and Door Clearance View	A-25
43	Post-Test Driver Dummy and Door Clearance View	A-26
44	Pre-Test Right Side View of Driver Dummy and Front Seat of Occupant Compartment	A-26
45	Post-Test Right Side View of Driver Dummy and Front Seat of Occupant Compartment	A-27
46	Pre-Test Driver Inner Door Panel View	A-27
47	Post-Test Driver Inner Door Panel View	A-28
48	Post-Test Driver Dummy Close-Up Head Contact with Vehicle View	A-28
49	Post-Test Driver Dummy Close-Up Head Contact with Side Air bag View	A-29
50	Post-Test Driver Dummy Close-Up Torso Contact with Vehicle Interior View	A-29
51	Post-Test Driver Dummy Close-Up Torso Contact with Side Air bag View	A-30
52	Post-Test Driver Dummy Close-Up Pelvis Contact View	A-30
53	Post-Test Driver Dummy Close-Up Pelvis Contact with Side Air bag View	A-31
54	Post-Test Driver Dummy Close-Up Knee Contact View	A-31
55	Pre-Test Left Side View of Rear Passenger Dummy Showing Belt and Chalking	A-32
56	Pre-Test Left Side View of Rear Passenger Dummy Shoulder and Door Top View	A-32
57	Post-Test Left Side View of Rear Passenger Dummy Shoulder and Door Top View	A-33
58	Pre-Test Frontal View of Rear Passenger Seat Back Prior to Dummy Positioning	A-33
59	Pre-Test Frontal View of Rear Passenger Dummy Head and Shoulders in Relation to Head Restraint	A-34
60	Pre-Test Overhead View of Rear Passenger Seat Pan Prior to Dummy Positioning	A-34
61	Pre-Test Overhead View of Rear Passenger Dummy Thighs on Seat Pan	A-35
62	Pre-Test View of Rear Passenger Dummy's Neck Showing Position of Adjustable Neck Bracket	A-35
63	Pre-Test View of Rear Passenger Dummy's Head Showing Dummy's Head is Level	A-36
64	Pre-Test Placement of Rear Passenger Dummy's Feet	A-36
65	Pre-Test View of Belt Anchorage for Rear Passenger Dummy	A-37
66	Pre-Test Close-Up Left Side View of Rear Passenger Seat Track	A-37
67	Pre-test Close-Up Left Side View of Rear Passenger Seat Back	A-38
68	Pre-Test Close-Up View of Rear Passenger Seat Back or Head Restraint	A-38

Fig.	Description	Page
69	Pre-Test Rear Passenger Dummy and Door Clearance View	A-39
70	Post-Test Rear Passenger Dummy and Door Clearance View	A-39
71	Pre-Test Right Side View of Rear Passenger Dummy and Rear Seat Occupant Compartment	A-40
72	Post-Test Right Side View of Rear Passenger Dummy and Rear Seat Occupant Compartment	A-40
73	Pre-Test Rear Passenger Inner Door Panel View	A-41
74	Post-Test Rear Passenger Inner Door Panel View Showing Rear Passenger Dummy Contact Locations	A-41
75	Post-Test Rear Passenger Dummy Close-Up Head Contact with Vehicle View	A-42
76	Post-Test Rear Passenger Dummy Close-Up Head Contact with Side Air bag View	A-42
77	Post-Test Rear Passenger Dummy Close-Up Torso Contact with Vehicle Interior View	A-43
78	Post-Test Rear Passenger Dummy Close-Up Torso Contact with Side Air bag View	A-43
79	Post-Test Rear Passenger Dummy Close-Up Pelvis Contact View	A-44
80	Post-Test Rear Passenger Dummy Close-Up Pelvis Contact with Side Air bag View	A-44
81	Post-Test Rear Passenger Dummy Close-Up Knee Contact View	A-45
82	Pre-Test View of Fuel Filler Cap or Fuel Filler Neck	A-45
83	Post-Test View of Fuel Filler Cap or Fuel Filler Neck	A-46
84	Pre-Test Front View of MDB Impactor Face	A-46
85	Post-Test Front View of MDB Impactor Face	A-47
86	Pre-Test Top View of MDB Impactor Face	A-47
87	Post-Test Top View of MDB Impactor Face	A-48
88	Pre-Test Left Side View of MDB Impactor Face	A-48
89	Post-Test Left Side View of MDB Impactor Face	A-49
90	Pre-Test Right Side View of MDB Impactor Face	A-49
91	Post-Test Right Side View of MDB Impactor Face	A-50
92	Close-Up View of Vehicle's Certification Label	A-50
93	Close-Up View of Vehicle's Tire Information Placard or Label	A-51
94	Pre-Test Ballast View	A-51
95	Post-Test Primary and Redundant Speed Trap Read-Out	A-52
96	FMVSS No. 301 Static Rollover 0 Degrees	A-52
97	FMVSS No. 301 Static Rollover 90 Degrees	A-53
98	FMVSS No. 301 Static Rollover 180 Degrees	A-53
99	FMVSS No. 301 Static Rollover 270 Degrees	A-54
100	FMVSS No. 301 Static Rollover 360 Degrees	A-54
101	Impact Event	A-55
102	Monroney Label	A-55
103	Driver Head Restraint Use and Adjustment Information from Vehicle Owner's Manual	A-56
104	Left Rear Passenger Head Restraint Use and Adjustment Information from Vehicle Owner's Manual	A-56



Figure A-1: As-Delivered Right Front 3/4 View of Test Vehicle



Figure A-2: As-Delivered Left Rear 3/4 View of Test Vehicle



Figure A-3: Pre-Test Frontal View of Test Vehicle



Figure A-4: Post-Test Frontal View of Test Vehicle



Figure A-5: Pre-Test Left Front 3/4 View of Test Vehicle



Figure A-6: Post-Test Left Front 3/4 View of Test Vehicle



Figure A-7: Pre-Test Left Side View of Test Vehicle



Figure A-8: Post-Test Left Side View of Test Vehicle



Figure A-9: Pre-Test Left Rear $\frac{3}{4}$ View of Test Vehicle



Figure A-10: Post-Test Left Rear $\frac{3}{4}$ View of Test Vehicle



Figure A-11: Pre-Test Rear View of Test Vehicle



Figure A-12: Post-Test Rear View of Test Vehicle



Figure A-13: Pre-Test Right Side View of Test Vehicle



Figure A-14: Post-Test Right Side View of Test Vehicle

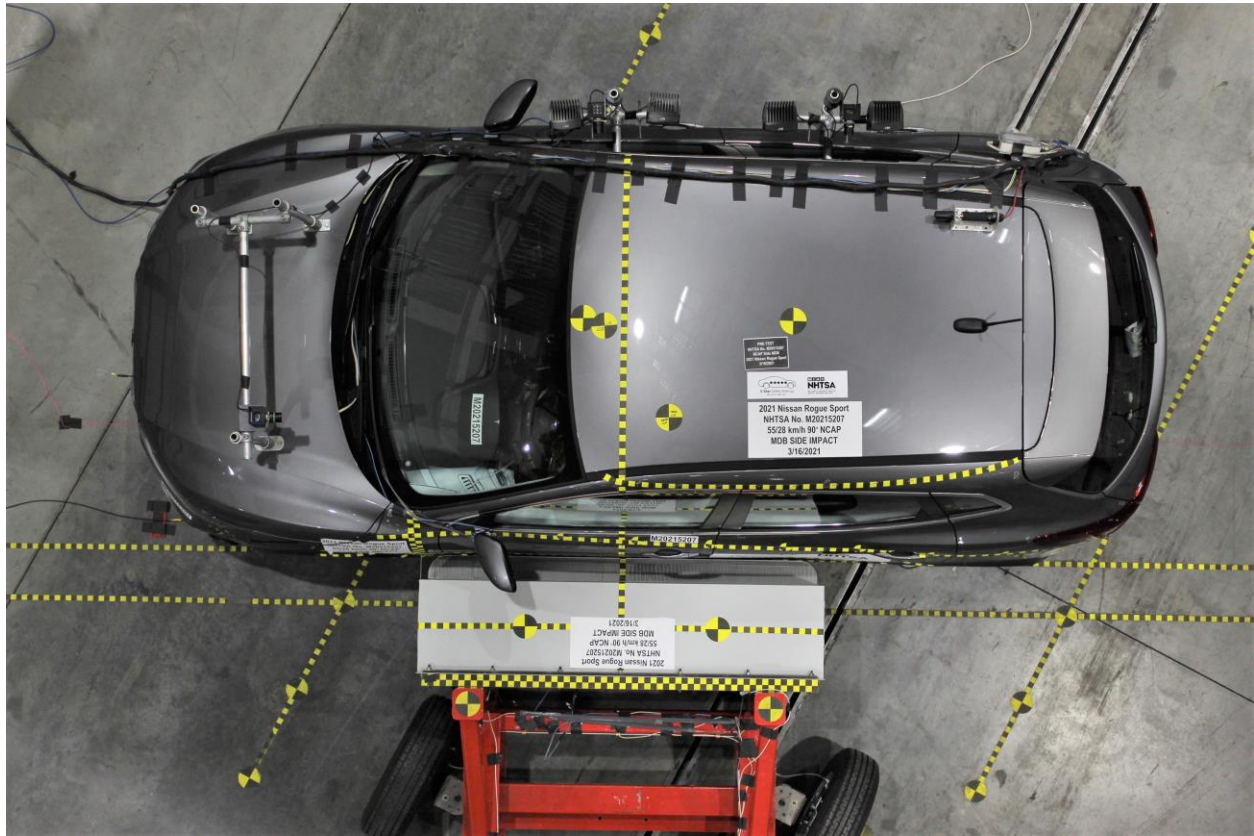


Figure A-15: Pre-Test Overhead View of the Test Area

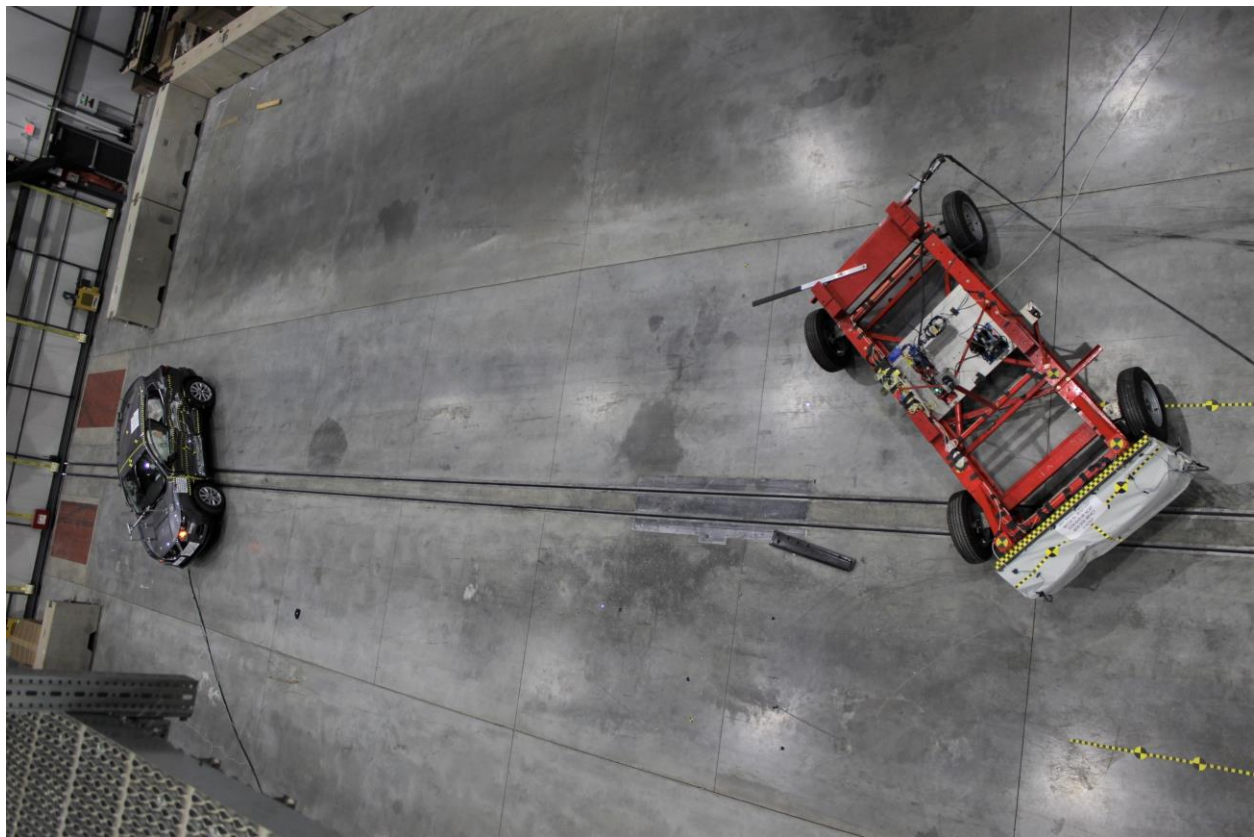


Figure A-16: Post-Test Overhead View of Test Area



Figure A-17: Pre-Test Left Side View of MDB Positioned Against Side of Test Vehicle



Figure A-18: Pre-Test Right Side View of MDB Positioned Against Side of Test Vehicle



Figure A-19: Pre-Test Close-up View of Impact Point Target



Figure A-20: Post-Test Close-up View of Impact Point Target



Figure A-21: Pre-Test Left Front Door Latch Close-Up



Figure A-22: Post-Test Left Front Door Latch Close-Up



Figure A-23: Pre-Test Left Rear Door Latch Close-Up

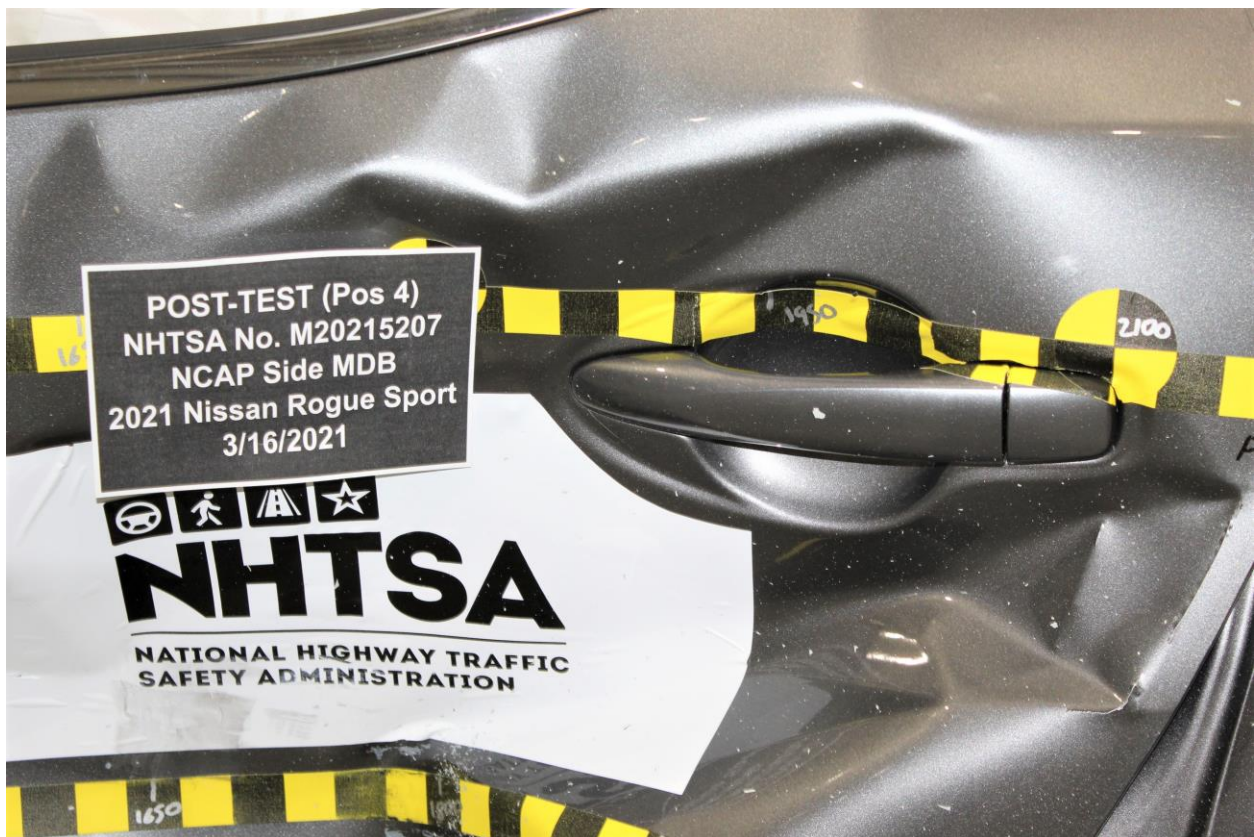


Figure A-24: Post-Test Left Rear Door Latch Close-Up



Figure A-25: Pre-Test Front Close-up View of Driver Dummy



Figure A-26: Post-Test Front Close-up View of Driver Dummy



Figure A-27: Pre-Test Left Side View of Driver Dummy Showing Belt and Chalking



Figure A-28: Pre-Test Left Side View of Driver Dummy Shoulder and Door Top View



Figure A-29: Post-Test Left Side View of Driver Dummy Shoulder and Door Top View



Figure A-30: Pre-Test Frontal View of Driver Seat Back Prior to Dummy Positioning



Figure A-31: Pre-Test Frontal View of Driver Dummy Head and Shoulders in Relation to Head Restraint



Figure A-32: Pre-Test Frontal View of Driver Seat Pan Prior to Dummy Positioning



Figure A-33: Pre-Test Overhead View of Driver Dummy Thighs on Seat Pan

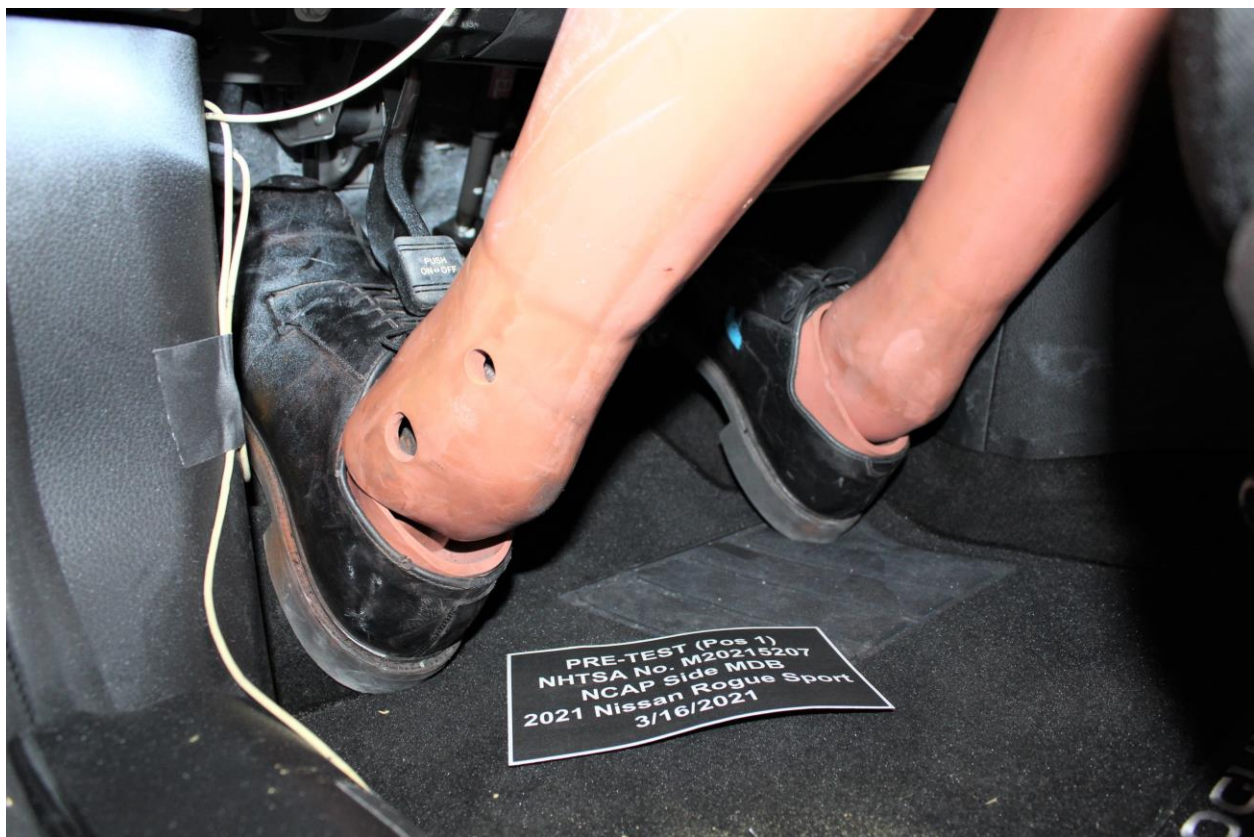


Figure A-34: Pre-Test Placement of Driver Dummy's Feet



Figure A-35: Pre-Test View of Belt Anchorage for Driver Dummy



Figure A-36: Pre-Test Left Side View of Steering Wheel



Figure A-37: View of Disengaged Parking Brake



Figure A-38: Pre-Test View of Parking Brake



Figure A-39: Pre-test Close-Up Left Side View of Driver Seat Track



Figure A-40: Pre-Test Close-Up Left Side View of Driver Seat Back



Figure A-41: Pre-Test Close-Up View of Driver Seat Back or Head Restraint



Figure A-42: Pre-Test Driver Dummy and Door Clearance View



Figure A-43: Post-Test Driver Dummy and Door Clearance View



Figure A-44: Pre-Test Right Side View of Driver Dummy and Front Seat of Occupant Compartment



Figure A-45: Post-Test Right Side View of Driver Dummy and Front Seat of Occupant Compartment



Figure A-46: Pre-Test Driver Inner Door Panel View



Figure A-47: Post-Test Driver Inner Door Panel View Showing Driver Dummy Contact Locations



Figure A-48: Post-Test Driver Dummy Close-Up Head Contact with Vehicle View



Figure A-49: Post-Test Driver Dummy Close-Up Head Contact with Side Air bag View



Figure A-50: Post-Test Driver Dummy Close-Up Torso Contact with Vehicle Interior View



Figure A-51: Post-Test Driver Dummy Close-Up Torso Contact with Side Air bag View



Figure A-52: Post-Test Driver Dummy Close-Up Pelvis Contact View

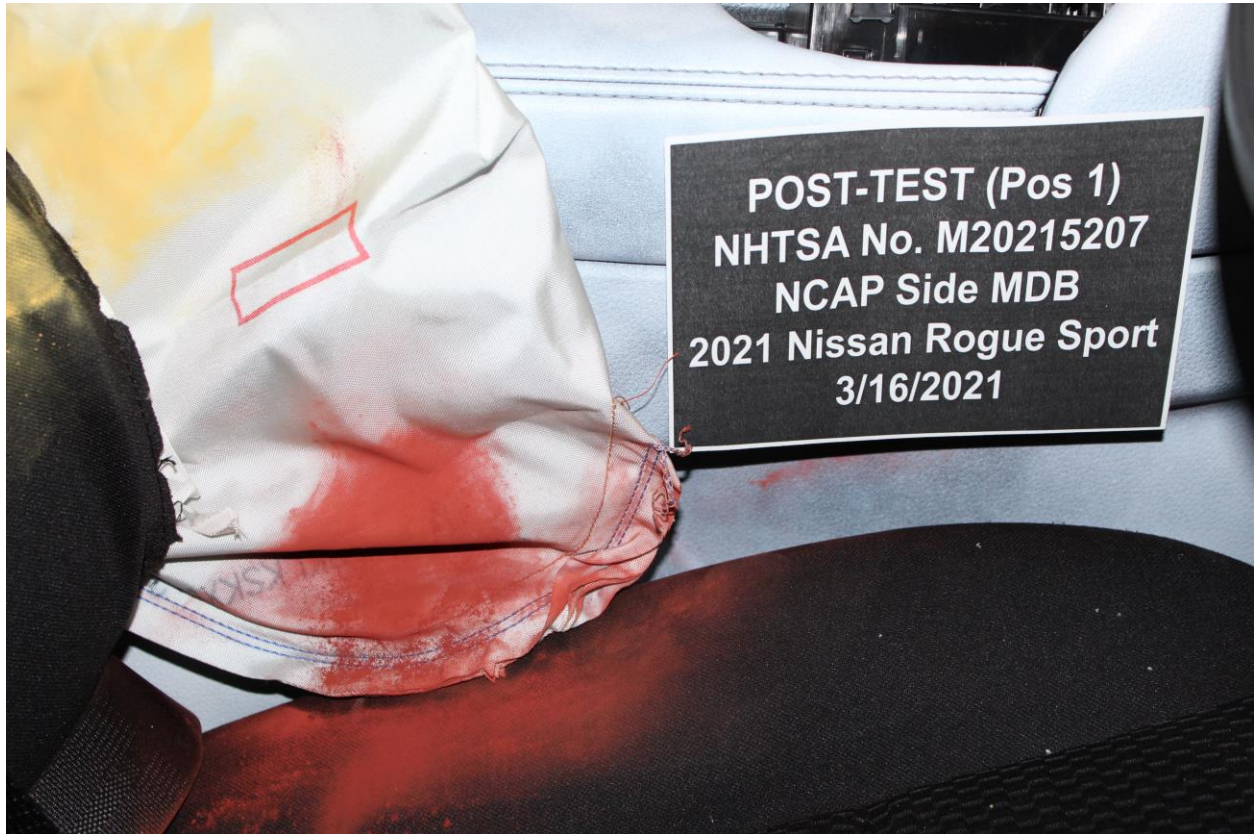


Figure A-53: Post-Test Driver Dummy Close-Up Pelvis Contact with Side Air bag View



Figure A-54: Post-Test Driver Dummy Close-Up Knee Contact View



Figure A-55: Pre-Test Left Side View of Rear Passenger Dummy Showing Belt and Chalking

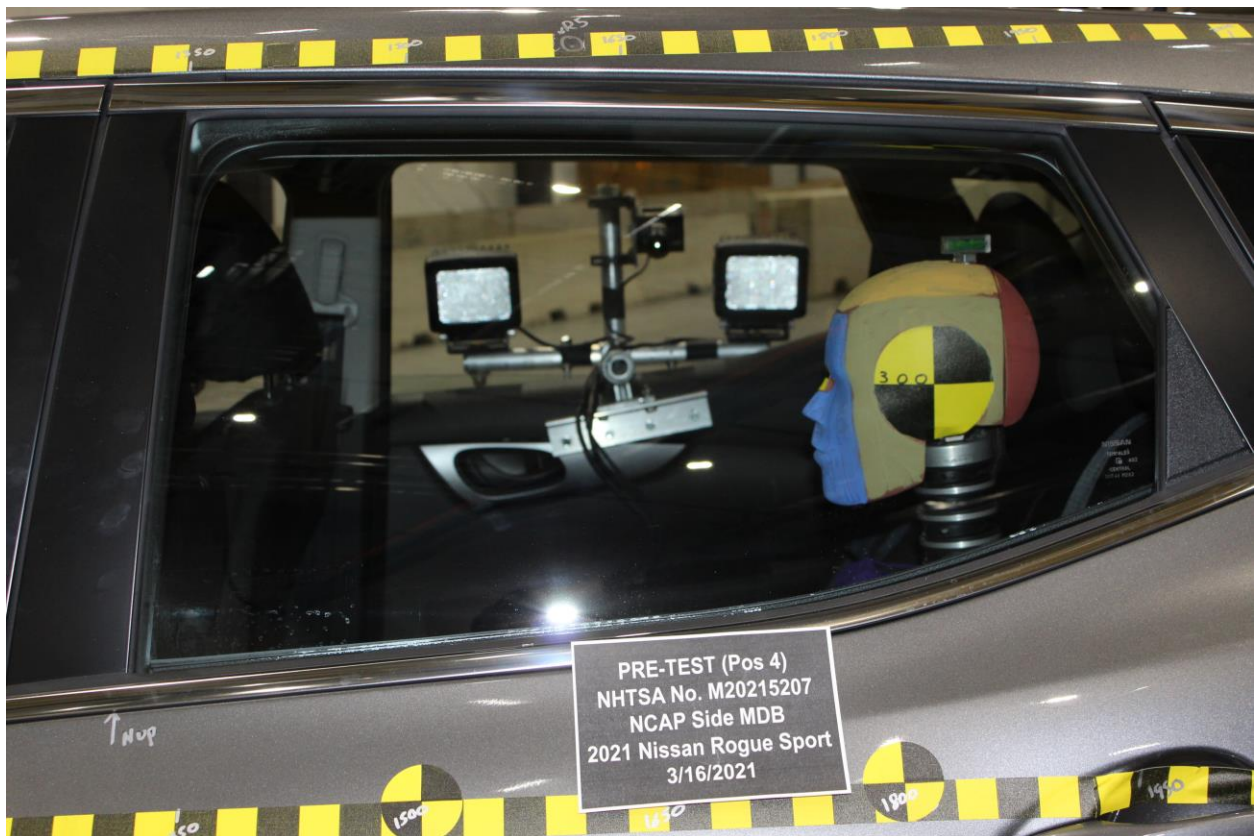


Figure A-56: Pre-Test Left Side View of Rear Passenger Dummy Shoulder and Door Top View



Figure A-57: Post-Test Left Side View of Rear Passenger Dummy Shoulder and Door Top View



Figure A-58: Pre-Test Frontal View of Rear Passenger Seat Back Prior to Dummy Positioning



Figure A-59: Pre-Test Frontal View of Rear Passenger Dummy Head and Shoulders in Relation to Head Restraint



Figure A-60: Pre-Test Overhead View of Rear Passenger Seat Pan Prior to Dummy Positioning

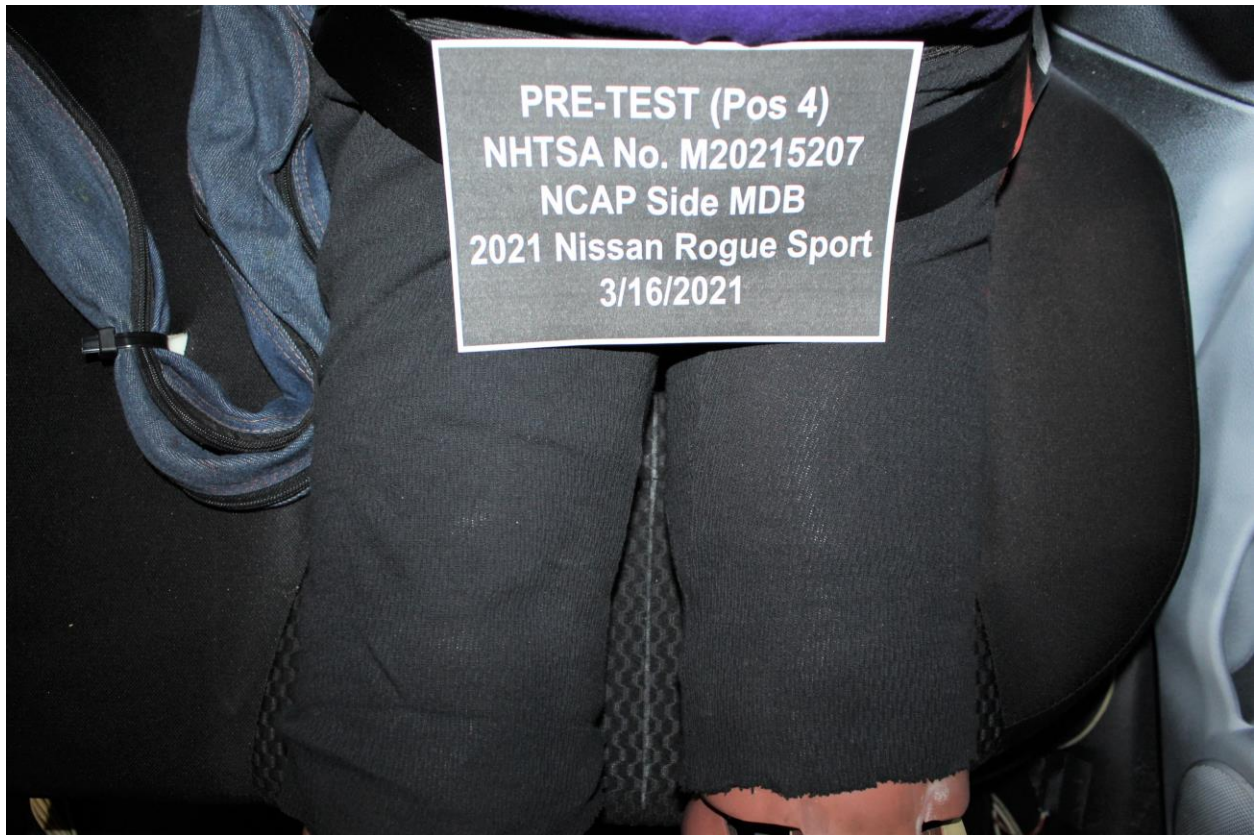


Figure A-61: Pre-Test Overhead View of Rear Passenger Dummy Thighs on Seat Pan



Figure A-62: Pre-Test View of Rear Passenger Dummy's Neck Showing Position of Adjustable Neck Bracket



Figure A-63: Pre-Test View of Rear Passenger Dummy's Head Showing Dummy's Head is Level



Figure A-64: Pre-Test Placement of Rear Passenger Dummy's Feet



Figure A-65: Pre-Test View of Belt Anchorage for Rear Passenger Dummy



Figure A-66: Pre-Test Close-Up Left Side View of Rear Passenger Seat Track



Figure A-67: Pre-Test Close-Up Left Side View of Rear Passenger Seat Back



Figure A-68: Pre-Test Close-Up View of Rear Passenger Seat Back or Head Restraint



Figure A-69: Pre-Test Rear Passenger Dummy and Door Clearance View



Figure A-70: Post-Test Rear Passenger Dummy and Door Clearance View



Figure A-71: Pre-Test Right Side View of Rear Passenger Dummy and Rear Seat Occupant Compartment



Figure A-72: Post-Test Right Side View of Rear Passenger Dummy and Rear Seat Occupant Compartment



Figure A-73: Pre-Test Rear Passenger Inner Door Panel View



Figure A-74: Post-Test Rear Passenger Inner Door Panel View Showing Rear Passenger Dummy Contact Locations



Figure A-75: Post-Test Rear Passenger Dummy Close-Up Head Contact with Vehicle View



Figure A-76: Post-Test Rear Passenger Dummy Close-Up Head Contact with Side Air bag View



Figure A-77: Post-Test Rear Passenger Dummy Close-Up Torso Contact with Vehicle Interior View



Figure A-78: Post-Test Rear Passenger Dummy Close-Up Torso Contact with Side Air bag View



Figure A-79: Post-Test Rear Passenger Dummy Close-Up Pelvis Contact View



Figure A-80: Post-Test Rear Passenger Dummy Close-Up Pelvis Contact with Side Air bag View



Figure A-81: Post-Test Rear Passenger Dummy Close-Up Knee Contact View



Figure A-82: Pre-Test View of Fuel Filler Cap or Fuel Filler Neck



Figure A-83: Post-Test View of Fuel Filler Cap or Fuel Filler Neck



Figure A-84: Pre-Test Front View of MDB Impactor Face



Figure A-85: Post-Test Front View of MDB Impactor Face



Figure A-86: Pre-Test Top View of MDB Impactor Face



Figure A-87: Post-Test Top View of MDB Impactor Face



Figure A-88: Pre-Test Left Side View of MDB Impactor Face



Figure A-89: Post-Test Left Side View of MDB Impactor Face



Figure A-90: Pre-Test Right Side View of MDB Impactor Face



Figure A-91: Post-Test Right Side View of MDB Impactor Face



M20215207

Figure A-92: Close-Up View of Vehicle's Certification Label

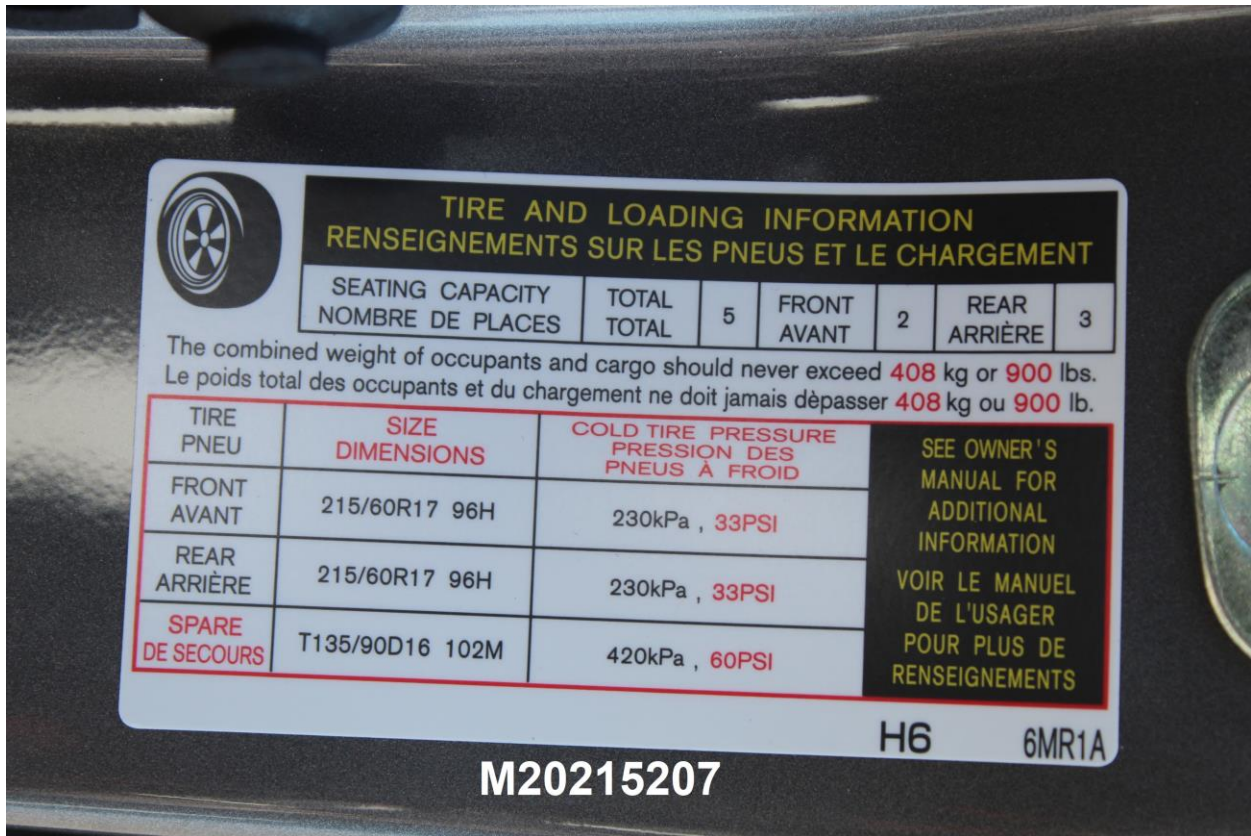


Figure A-93: Close-Up View of Vehicle's Tire Information Placard or Label

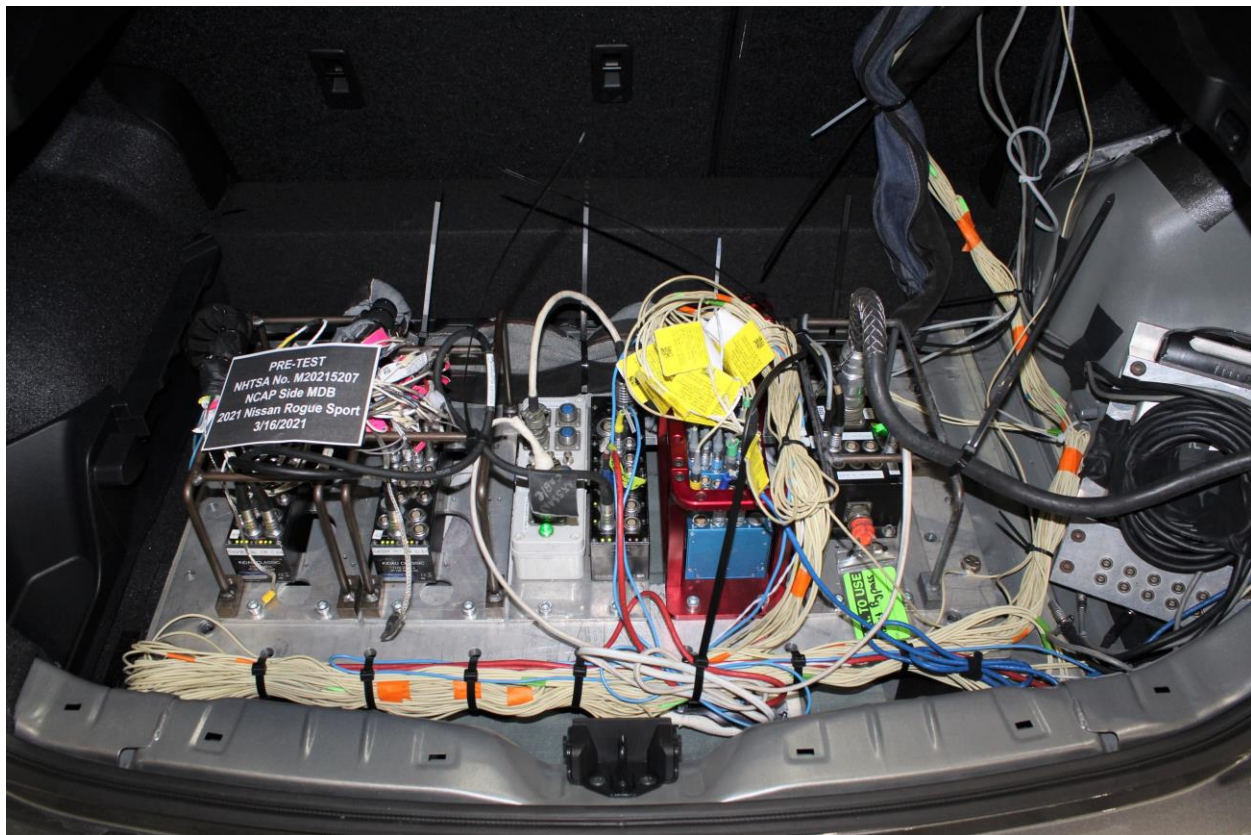


Figure A-94: Pre-Test Ballast View



Figure A-95: Post-Test Primary and Redundant Speed Trap Read-Out

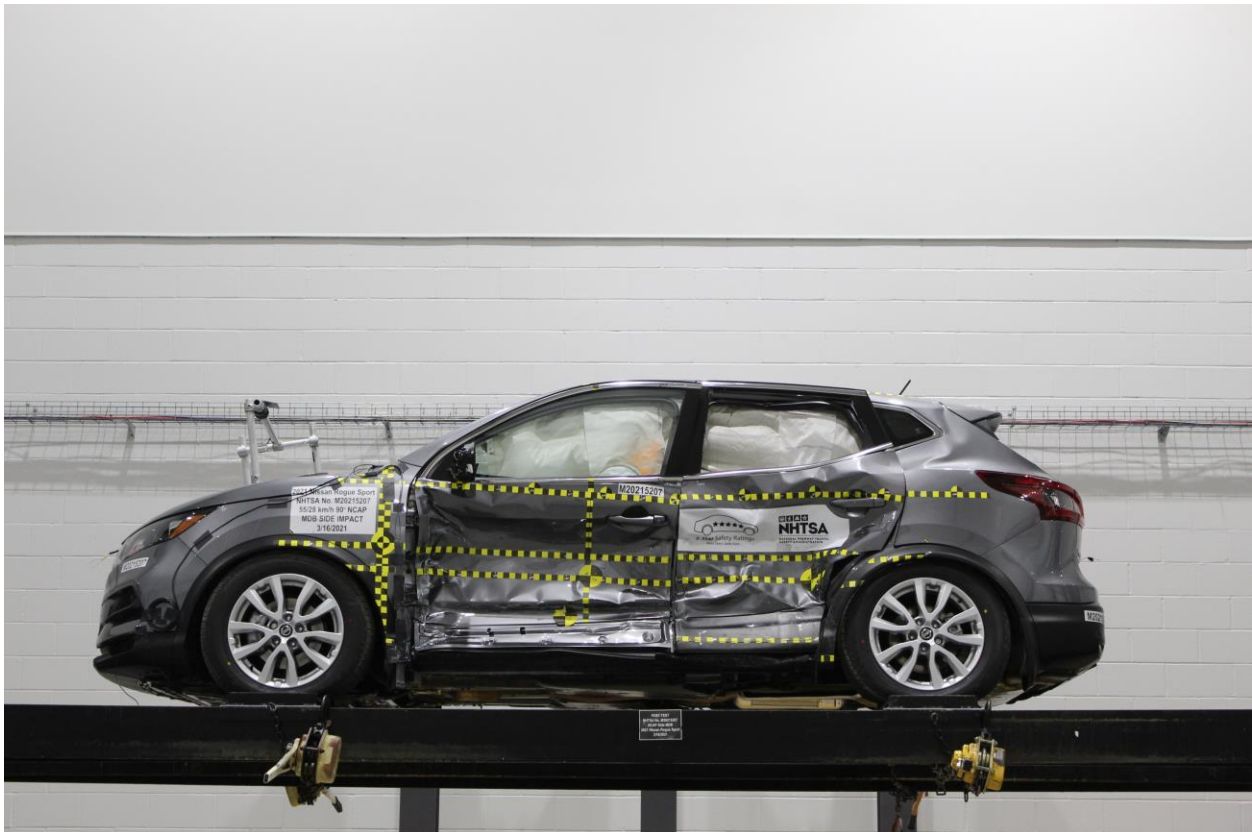


Figure A-96: FMVSS No. 301 Static Rollover 0 Degrees

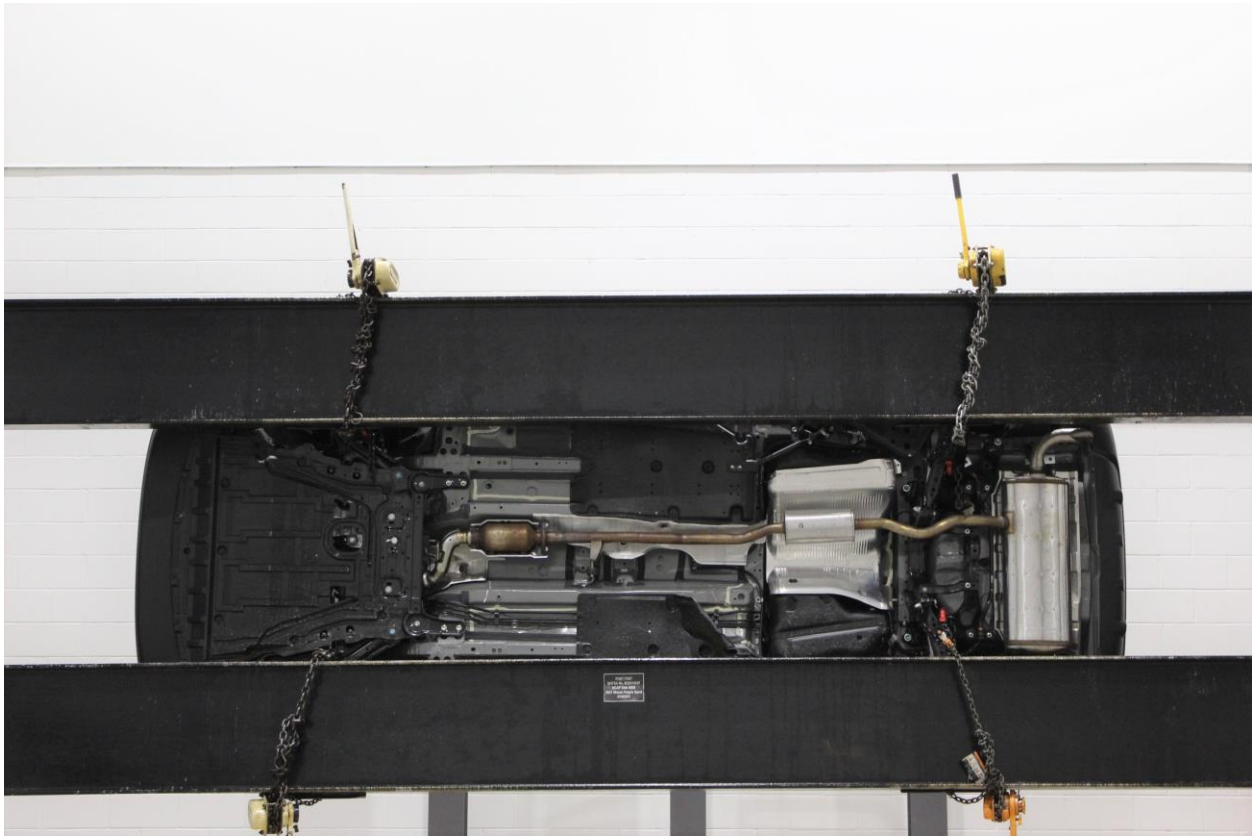


Figure A-97: FMVSS No. 301 Static Rollover 90 Degrees



Figure A-98: FMVSS No. 301 Static Rollover 180 Degrees

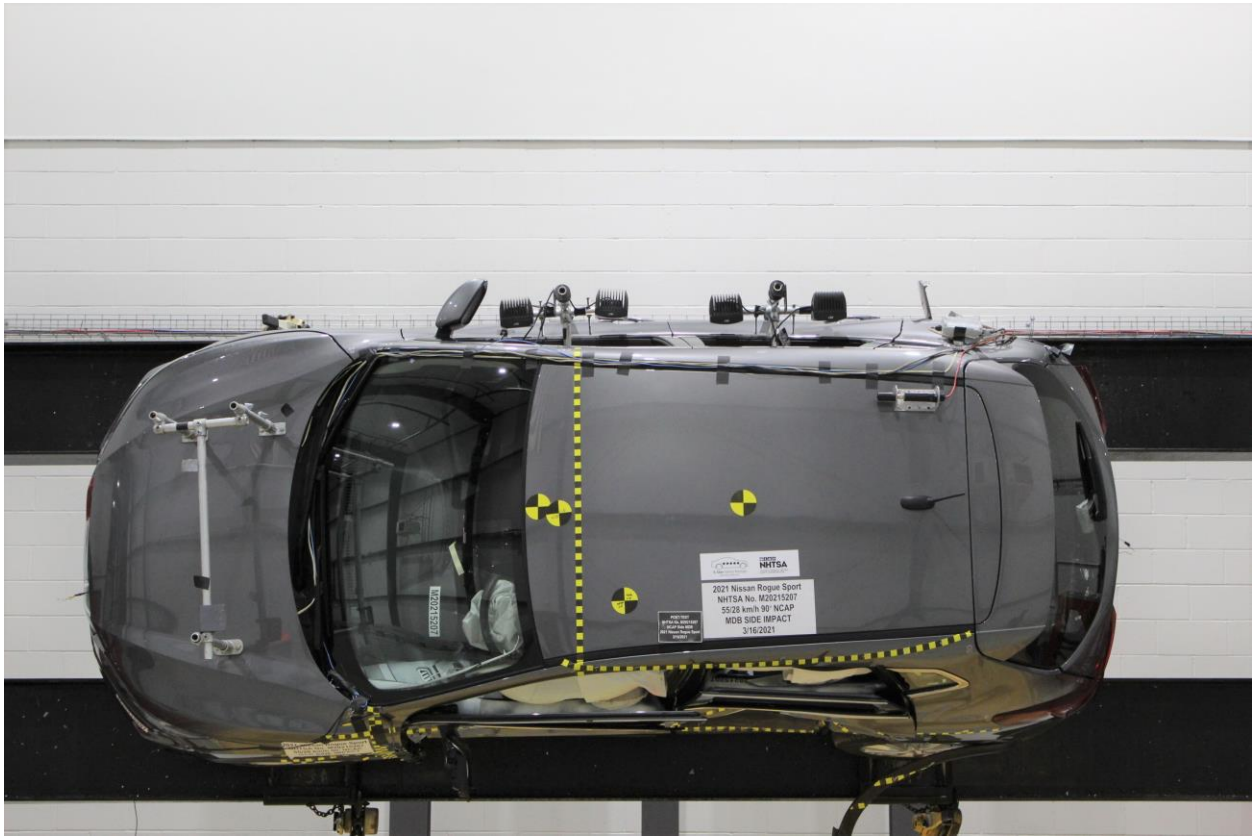


Figure A-99: FMVSS No. 301 Static Rollover 270 Degrees



Figure A-100: FMVSS No. 301 Static Rollover 360 Degrees



Figure A-101: Impact Event

2021 NISSAN ROGUE SPORT S FWD

Scan QR code for general model information & options

Standard Equipment Included at No Extra Charge

MECHANICAL & PERFORMANCE
 2.0L DOHC 16-Valve 4-Cylinder Engine
 141 Horsepower and 147 lb-ft of Torque
 Eco Mode
 XTRONIC CVT6 Automatic Transmission w/ Manual Shift Mode
 Independent Front Strut Suspension
 Independent Rear Multi-link Suspension
 17" Alloy Wheels
 Temporary Spare Tire

SAFETY & SECURITY
 Nissan Advanced Air Bag System (AABS)
 Front & Rear outboard Seat-mounted Side-impact & Roof-mounted Curtain Supplemental Air Bags
 Driver and Front-passenger Knee Air Bags
 Lower Anchors and Tethers for Children (LATCH)
 4-Wheel Anti-lock Braking System (ABS)
 Vehicle Dynamic Control (VDC)
 Electronic Brake Force Distribution (EBD)
 Brake Assist
 Vehicle Security System with Remote Keyless Entry
 Tire Pressure Monitoring System (TPMS) with Easy-Fill Tire Alert
 Intelligent Forward Collision Warning (IFCW)
 Auto Brake Emergency Braking (AEB) w/ Pedestrian Detection
 Rear Automatic Braking (RAB)
 Blind Spot Warning (BSW)
 Rear Cross Traffic Alert (RCTA)
 Lane Departure Warning (LDW)
 Intelligent Lane Intervention (I-LI)
 High Beam Assist (HBA)

COMFORT & CONVENIENCE
 6-way Manual Driver Seat
 4-way Manual Front Passenger Seat
 60/4 Split Fold-down Rear Seats
 2nd-row Seat Air Vents
 Power Door Locks w/ Auto-locking Feature
 Power Windows w/ Driver One-touch Auto up/down
 Rear View Monitor
 Rear User Alert
 Rear Sonar System
 Cruise Control with Steering-wheel-mounted Controls
 Intelligent Engine Brake (i-EB)

COMFORT & CONVENIENCE CONT.
 Hill Start Assist
 Intelligent Trace Control (I-TC)
 Active Ride Control (ARC)
 NissanConnect®
 Apple CarPlay™
 Android Auto™
 SiriusXM Radio™ w/ Advanced Audio Features
 7" Color Touch-screen Display
 Bluetooth® Hands-free Phone System™
 Streaming Audio via Bluetooth®
 Hands-free Text Messaging Assistant™

EXTERIOR
 LED Daytime Running Lights (DRL)
 Auto On/Off Halogen Headlights w/ LED Signature
 Approach Lighting
 Rear Spoiler
 Dual Power Outside Mirrors

Manufacturer's Suggested Retail Base Price: \$23,860.00

Options Included by Manufacturer:
 Splash Guards 170.00
 Floor Mats, 1-piece Cargo Area Protector, and First Aid Kit 290.00

DESTINATION CHARGES: 1,095.00

Total: \$25,415.00

EPA DOT Fuel Economy and Environment Gasoline Vehicle

Fuel Economy: 28 MPG combined city/hwy, 25 city, 32 highway. 3.6 gallons per 100 miles.

You save \$250 in fuel costs over 5 years compared to the average new vehicle.

Annual fuel cost: \$1,450

Fuel Economy & Greenhouse Gas Rating: 6 (Best)

Smog Rating: 5 (Best)

Actual results will vary for many reasons, including driving conditions and how you drive and maintain your vehicle. The average new vehicle gets 27 MPG and costs \$7,500 to fuel over 5 years. Cost estimates are based on 15,000 miles per year at 52.7¢ per gallon. MPG is miles per gallon (city equivalent). Vehicle emissions are a significant cause of climate change and smog.

GOVERNMENT 5-STAR SAFETY RATINGS

Overall Vehicle Score: Not Rated
 Based on the combined ratings of frontal, side and rollover. Should ONLY be compared to other vehicles of similar size and weight.

Frontal Crash	Driver Passenger	Not Rated
Side Crash	Front seat Rear seat	Not Rated

Rollover: ★★★★★
 Based on the risk of rollover in a single-vehicle crash.

DELIVERY

VEHICLE COLORS: EXT.GUN METALLIC
 INT: CHARCOAL

FINAL ASSEMBLY POINT: TACOMA
TRANSPORT METHOD: TRUCK

DEALER: BILKAY'S DOWNERS GROVE
 1601 OGDEN AVE.
 DOWNERS GROVE IL 60515


Star ratings range from 1 to 5 stars (★★★★★) with 5 being the highest. Source: National Highway Traffic Safety Administration (NHTSA). www.safercar.gov or 1-888-327-4236

This Vehicle qualifies for Nissan's **Security+Plus Extended Protection Plan**
 The only service agreement backed by Nissan Extended Services North America! Ask your dealer for details, or call 1-800-NISSAN-1 for more information.

VIN: JN1B1AV1M0W301985
 EMS:50 STATE EMISSIONS
 MDL:27111-301985_KAD-G
 OPT: C-B0L5G0C3

2021014233520AS310


Figure A-102: Monroney Label



REMOVE


Use the following procedure to remove the head restraint/headrest.

1. Pull the head restraint/headrest up to the highest position.
2. Push and hold the lock knob.
3. Remove the head restraint/headrest from the seat.
4. Store the head restraint/headrest properly in a secure place so it is not loose in the vehicle.
5. Reinstall and properly adjust the head restraint/headrest before an occupant uses the seating position.



INSTALL

1. Align the head restraint/headrest stalks with the holes in the seat. Make sure that the head restraint/headrest is facing the correct direction. The stalk with the adjustment notch ① must be installed in the hole with the lock knob ②.
2. Push and hold the lock knob and push the head restraint/headrest down.
3. Properly adjust the head restraint/headrest before an occupant uses the seating position.




ADJUST

For adjustable head restraint/headrest


Adjust the head restraint/headrest so the center is level with the center of your ears. If your ear position is still higher than the recommended alignment, place the head restraint/headrest at the highest position.

Figure A-103: Driver Head Restraint Use and Adjustment Information from Vehicle Owner's Manual



For non-adjustable head restraint/headrest


Make sure the head restraint/headrest is positioned so the lock knob is engaged in the notch before riding in that designated seating position.



Raise

To raise the head restraint/headrest, pull it up.

Make sure the head restraint/headrest is positioned so the lock knob is engaged in the notch before riding in that designated seating position.



Lower

To lower, push and hold the lock knob and push the head restraint/headrest down.

Make sure the head restraint/headrest is positioned so the lock knob is engaged in the notch before riding in that designated seating position.

Figure A-104: Left Rear Passenger Head Restraint Use and Adjustment Information from Vehicle Owner's Manual-Rear Restraints Not Adjustable

APPENDIX B

VEHICLE AND DUMMY RESPONSE DATA PLOTS

TABLE OF DATA PLOTS

Driver & Passenger Dummy Instrumentation Plots

Fig.	Description	Page
1	Driver Head Acceleration (X) Primary vs. Time	B-5
2	Driver Head Acceleration (Y) Primary vs. Time	B-5
3	Driver Head Acceleration (Z) Primary vs. Time	B-5
4	Driver Head Resultant Acceleration Primary vs. Time	B-5
5	Driver Upper Thorax Rib Deflection (Y) vs. Time	B-6
6	Driver Middle Thorax Rib Deflection (Y) vs. Time	B-6
7	Driver Lower Thorax Rib Deflection (Y) vs. Time	B-6
8	Driver Thorax Rib Deflection Maximum vs. Time	B-6
9	Driver Anterior Abdominal Force (Y) vs. Time	B-7
10	Driver Middle Abdominal Force (Y) vs. Time	B-7
11	Driver Posterior Abdominal Force (Y) vs. Time	B-7
12	Driver Total Abdominal Force (Y) vs. Time	B-7
13	Driver Pubic Symphysis Force (Y) vs. Time	B-8
14	Passenger Head Acceleration (X) vs. Time Primary	B-8
15	Passenger Head Acceleration (Y) vs. Time Primary	B-8
16	Passenger Head Acceleration (Z) vs. Time Primary	B-8
17	Passenger Head Resultant Acceleration Primary vs. Time	B-9
18	Passenger Lower Spine T12 Acceleration (X) vs. Time	B-9
19	Passenger Lower Spine T12 Acceleration (Y) vs. Time	B-9
20	Passenger Lower Spine T12 Acceleration (Z) vs. Time	B-9
21	Passenger Lower Spine T12 Resultant Acceleration vs. Time	B-10
22	Passenger Iliac Force on Impact Side (Y) vs. Time	B-10
23	Passenger Acetabulum Force on Impact Side (Y) vs. Time	B-10
24	Passenger Total Pelvic Force on Impact Side (Y) vs. Time	B-10

The following additional data for this test can be obtained from the Research and Development section of the NHTSA website. The website can be found at www.NHTSA.gov.

Additional Driver & Passenger Dummy Instrumentation Data





Driver Lower Spine T12 Acceleration (X)
Driver Lower Spine T12 Acceleration (Y)
Driver Lower Spine T12 Acceleration (Z)
Passenger Upper Thorax Rib Deflection (Y)
Passenger Middle Thorax Rib Deflection (Y)
Passenger Lower Thorax Rib Deflection (Y)
Passenger Upper Abdomen Rib Deflection (Y)
Passenger Lower Abdomen Rib Deflection (Y)
Driver Head Acceleration Redundant (X)
Driver Head Acceleration Redundant (Y)
Driver Head Acceleration Redundant (Z)
Passenger Head Acceleration Redundant (X)
Passenger Head Acceleration Redundant (Y)
Passenger Head Acceleration Redundant (Z)





Vehicle Instrumentation Data





Vehicle Center of Gravity Acceleration (X)
Vehicle Center of Gravity Acceleration (Y)
Vehicle Center of Gravity Acceleration (Z)
Right Side Sill at Front Seat Acceleration (X)
Right Side Sill at Front Seat Acceleration (Y)
Right Side Sill at Front Seat Acceleration (Z)
Right Side Sill at Rear Seat Acceleration (X)
Right Side Sill at Rear Seat Acceleration (Y)
Right Side Sill at Rear Seat Acceleration (Z)
Left Side Sill at Front Seat Acceleration (Y)
Left Side Sill at Rear Seat Acceleration (Y)
Lower A-Post Acceleration (Y)
Middle A-Post Acceleration (Y)
Lower B-Post Acceleration (Y)
Middle B-Post Acceleration (Y)
Front Seat Track Acceleration (Y)
Rear Seat Structure Acceleration (Y)
Right Rear Occupant Compartment Acceleration (Y)
Engine Block (X)
Engine Block (Y)
Rear Floorpan Above Axle Acceleration (X)
Rear Floorpan Above Axle Acceleration (Y)
Rear Floorpan Above Axle Acceleration (Z)

MDB Instrumentation Data


MDB Center of Gravity Acceleration (X)
MDB Center of Gravity Acceleration (Y)
MDB Center of Gravity Acceleration (Z)
MDB Rear Acceleration (X)
MDB Rear Acceleration (Y)
Left MDB Contact Switch
Right MDB Contact Switch

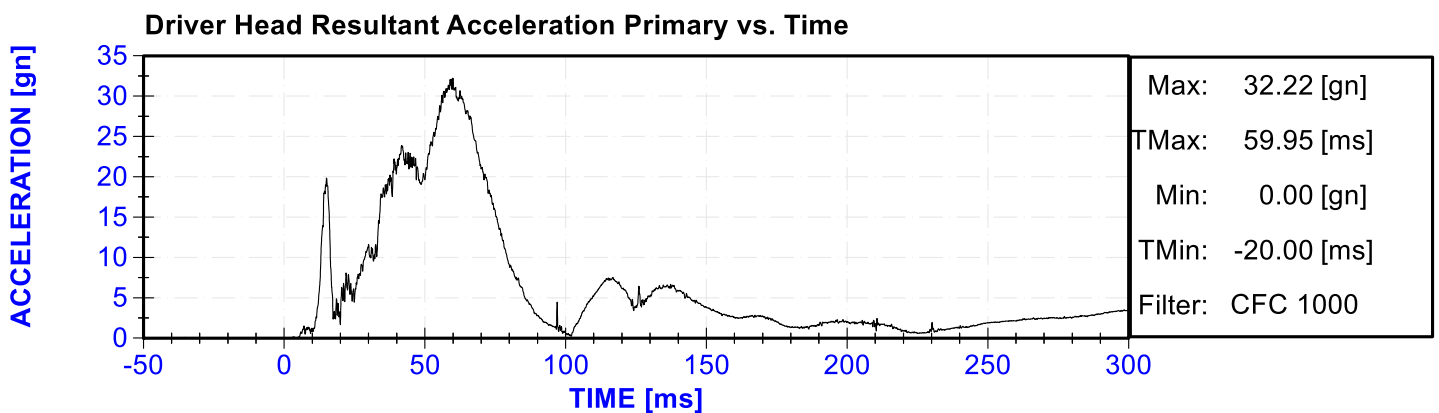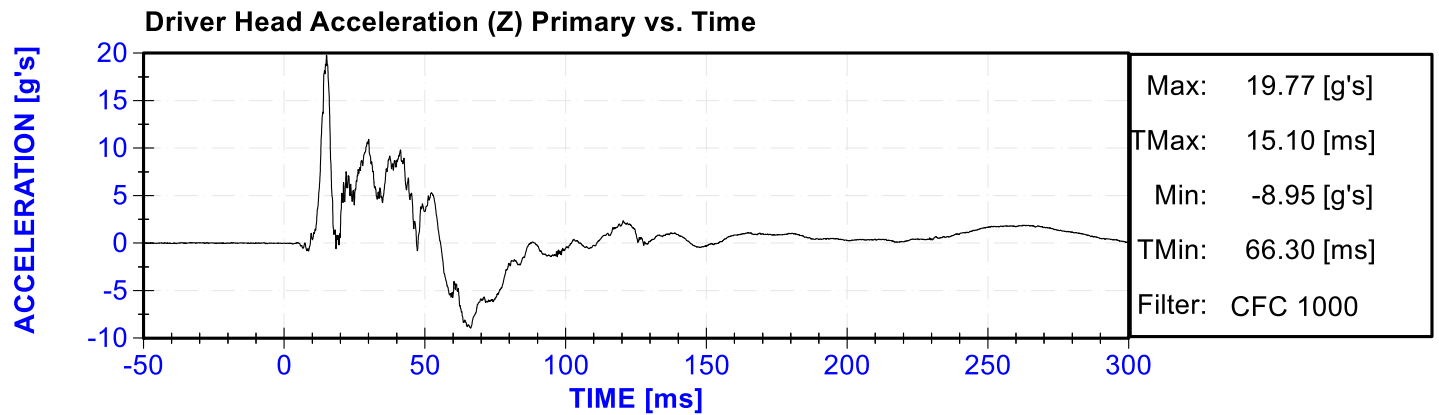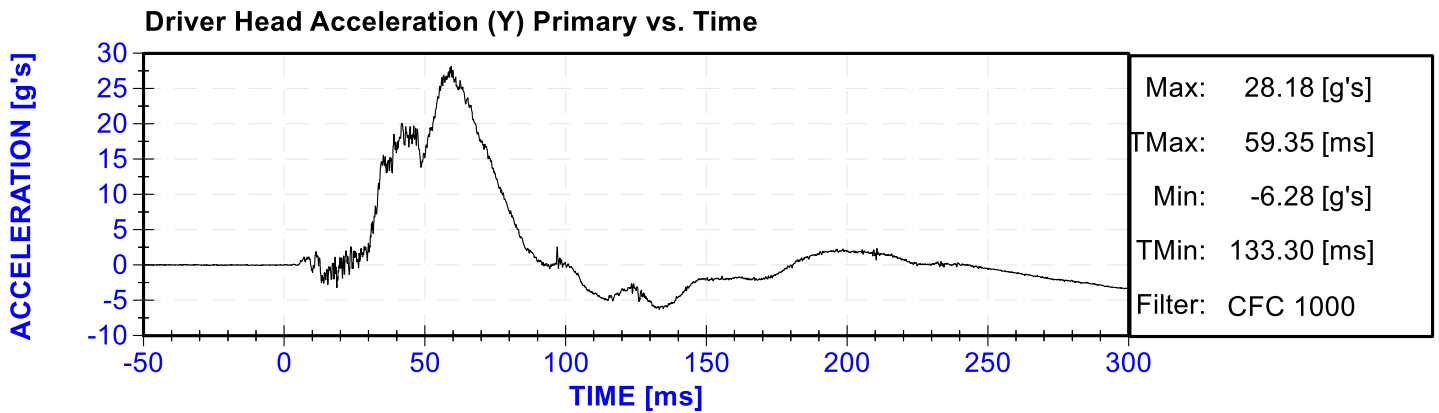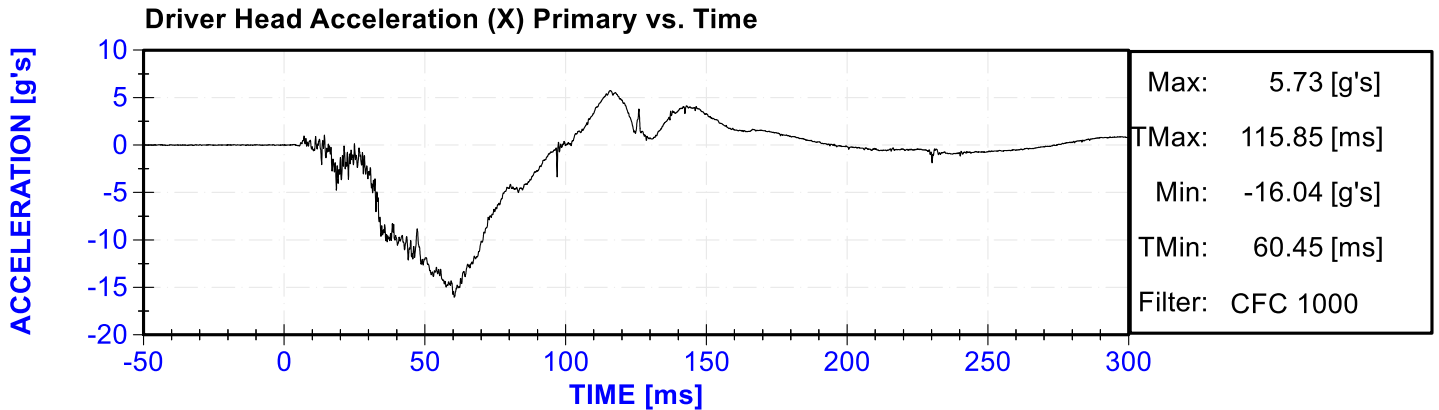

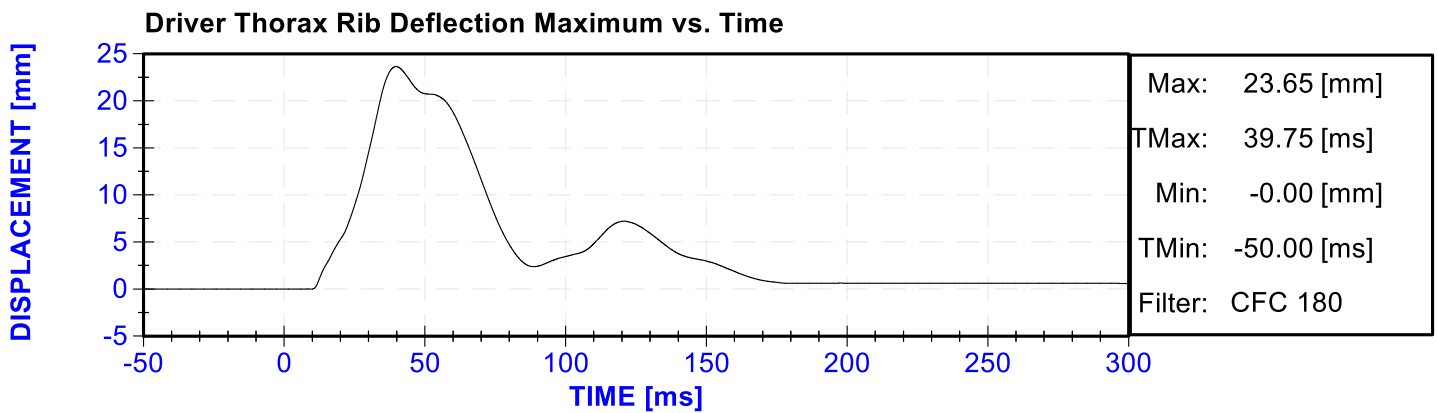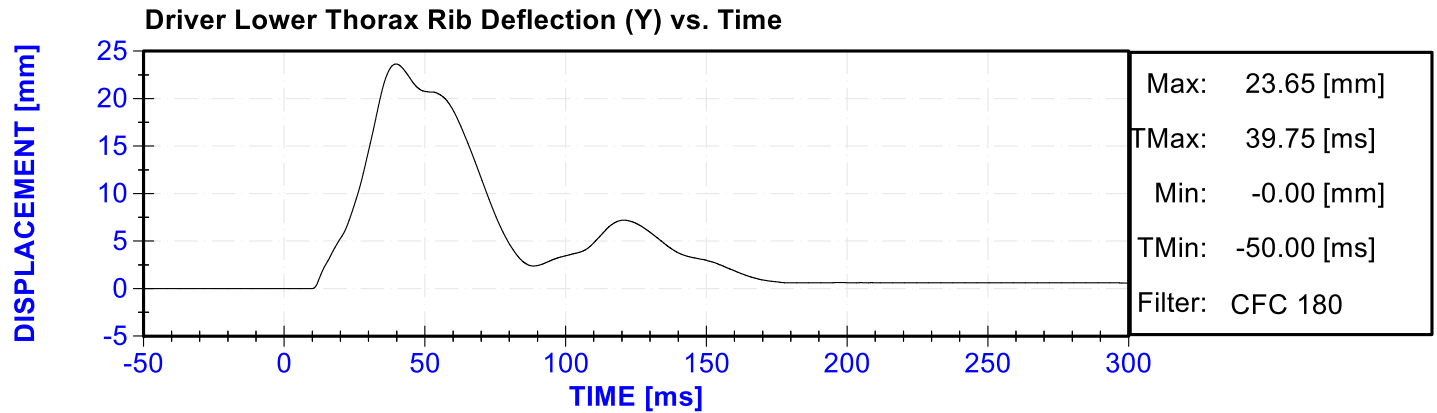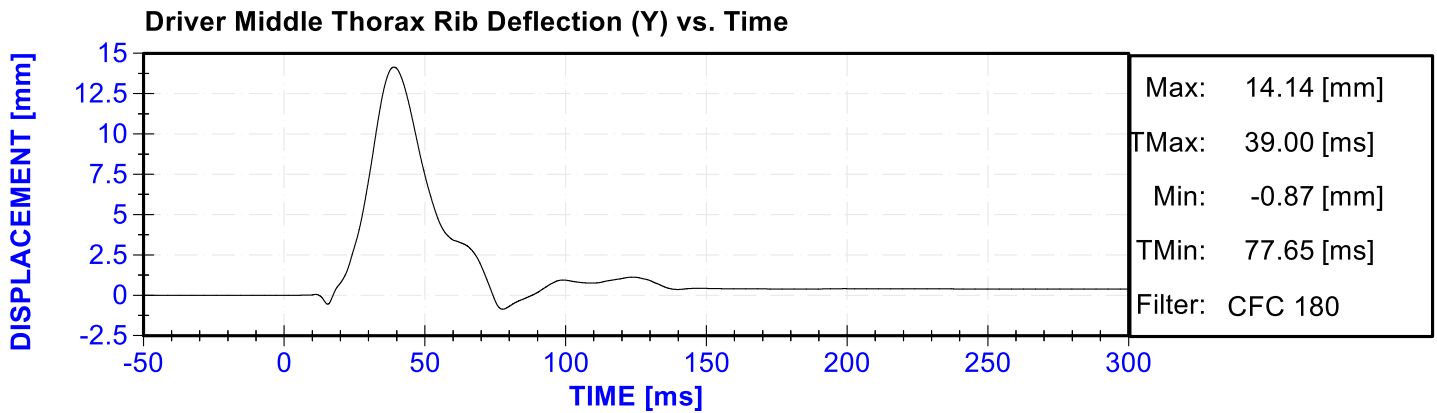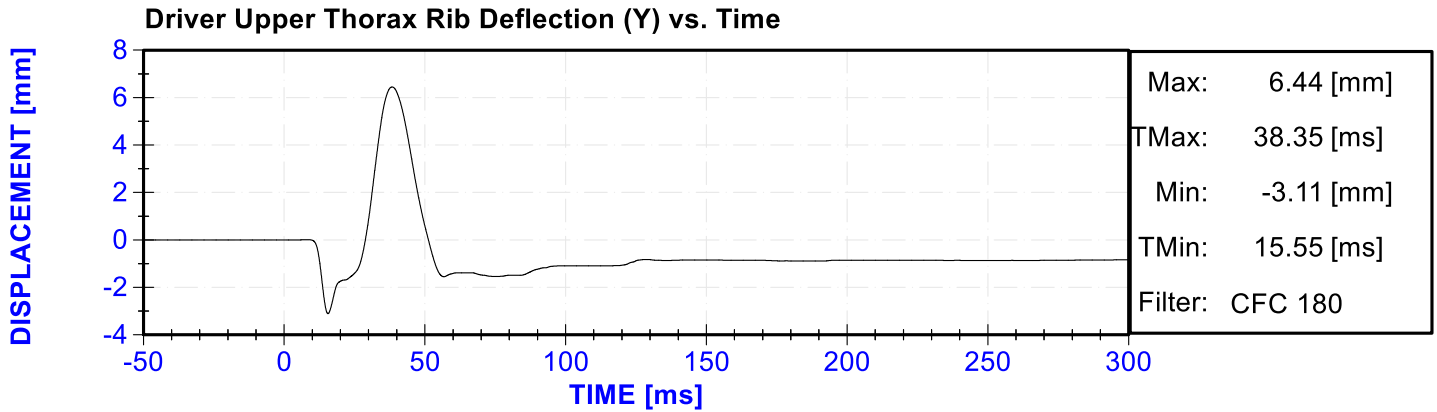


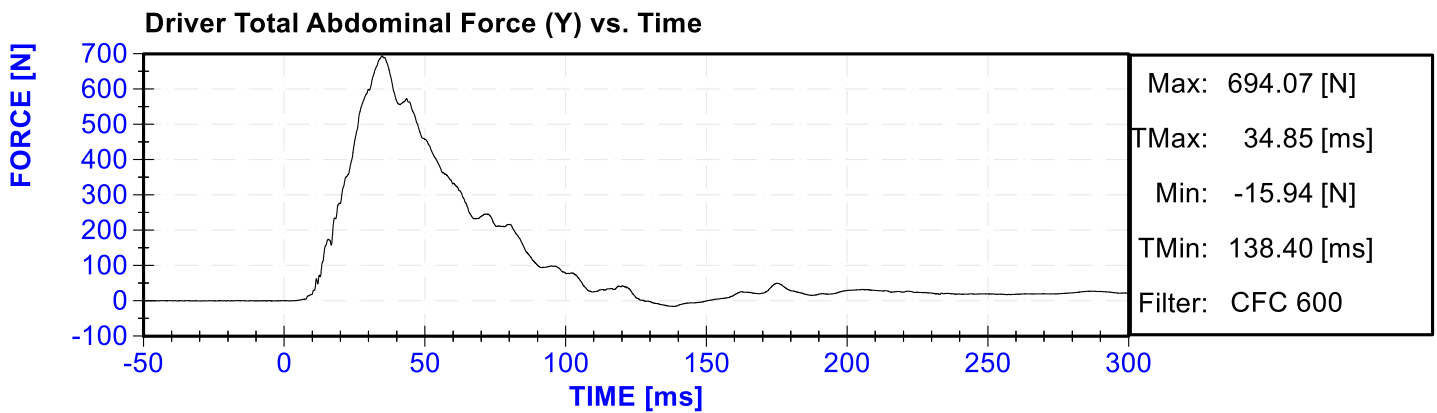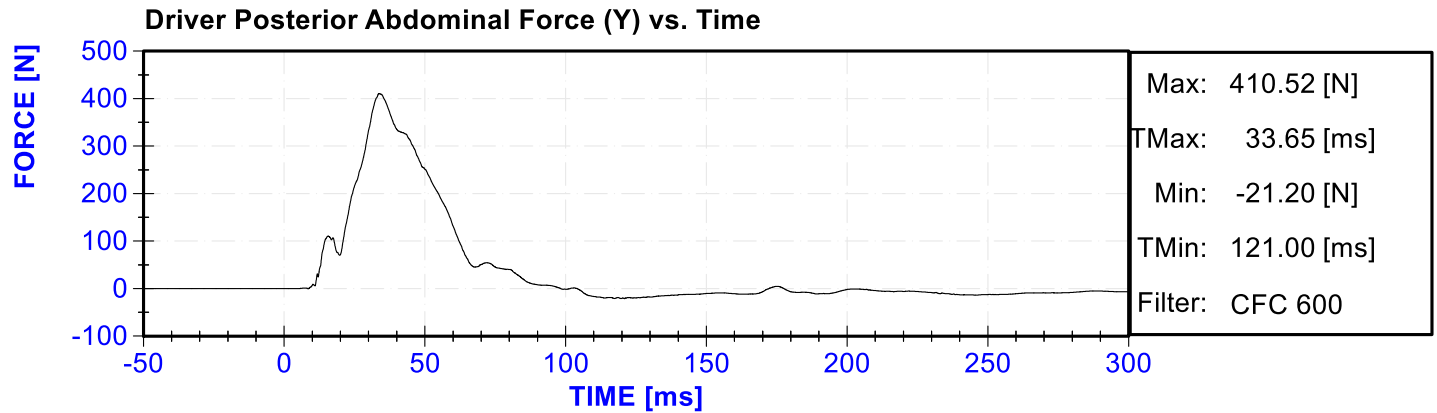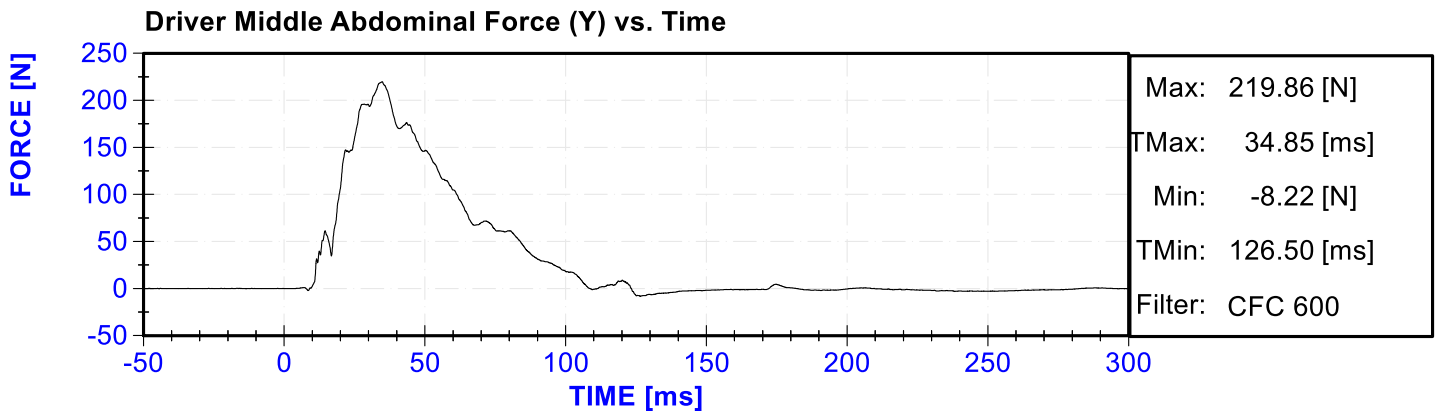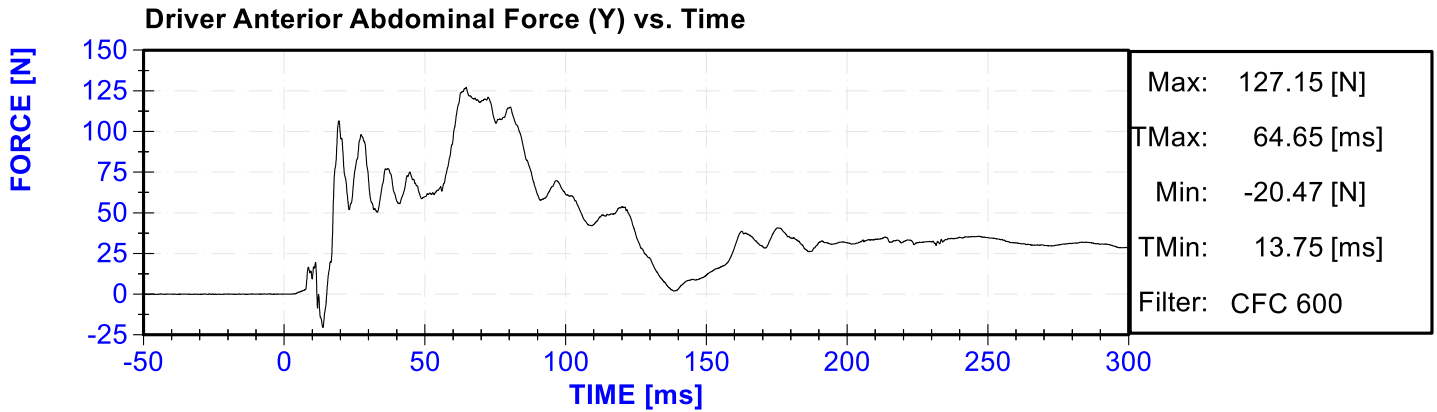


Driver Pubic Symphysis Force (Y) vs. Time

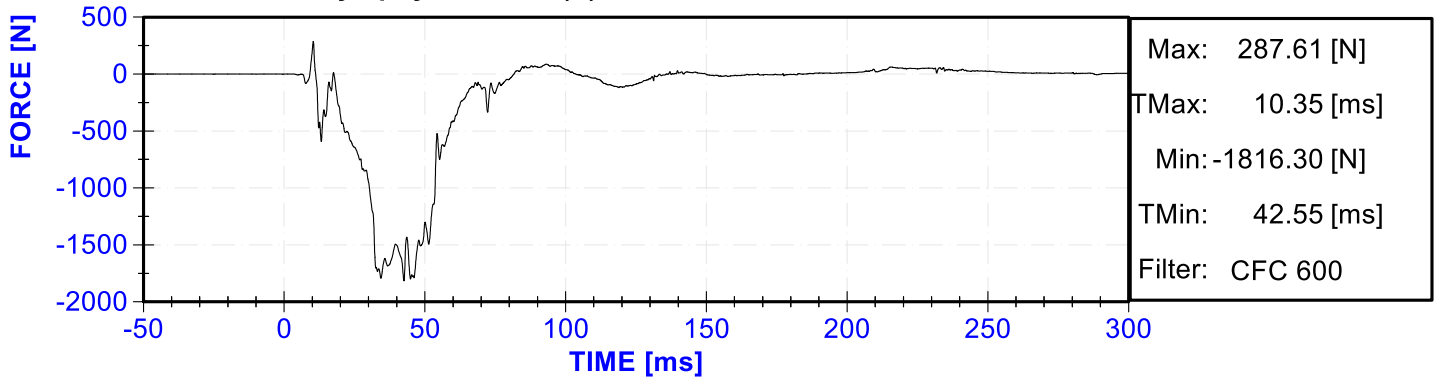


Passenger Head Acceleration (X) vs. Time Primary




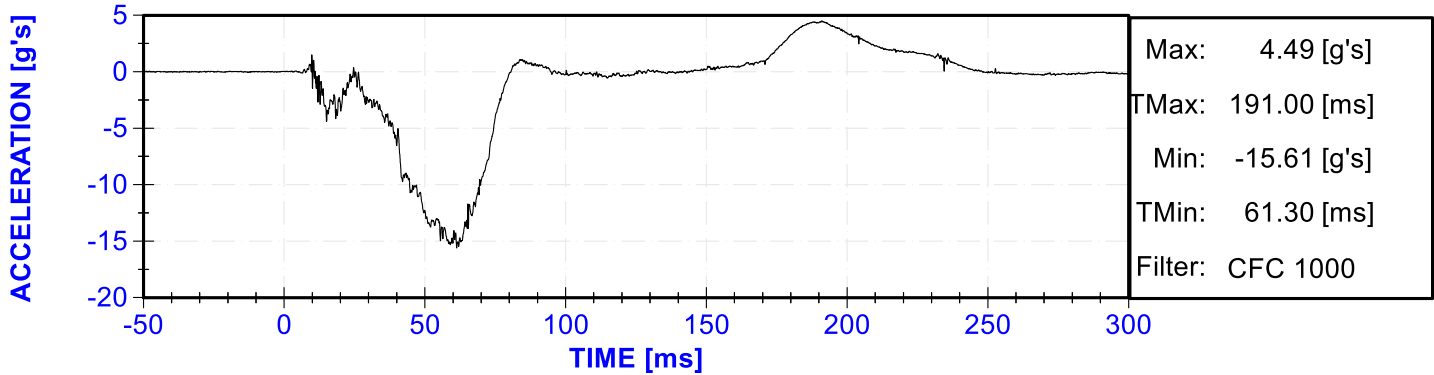






Passenger Head Acceleration (Y) vs. Time Primary

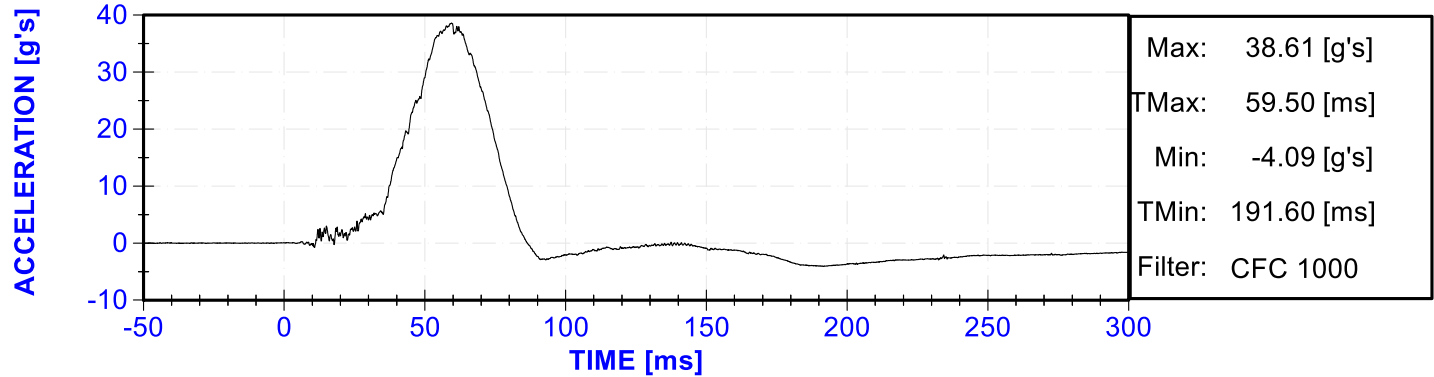

Passenger Head Acceleration (Z) vs. Time Primary

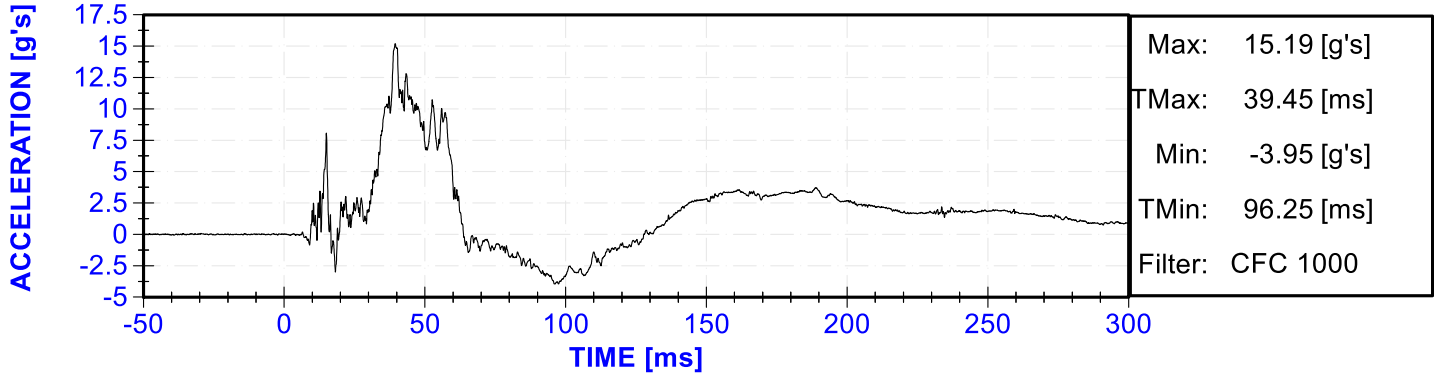

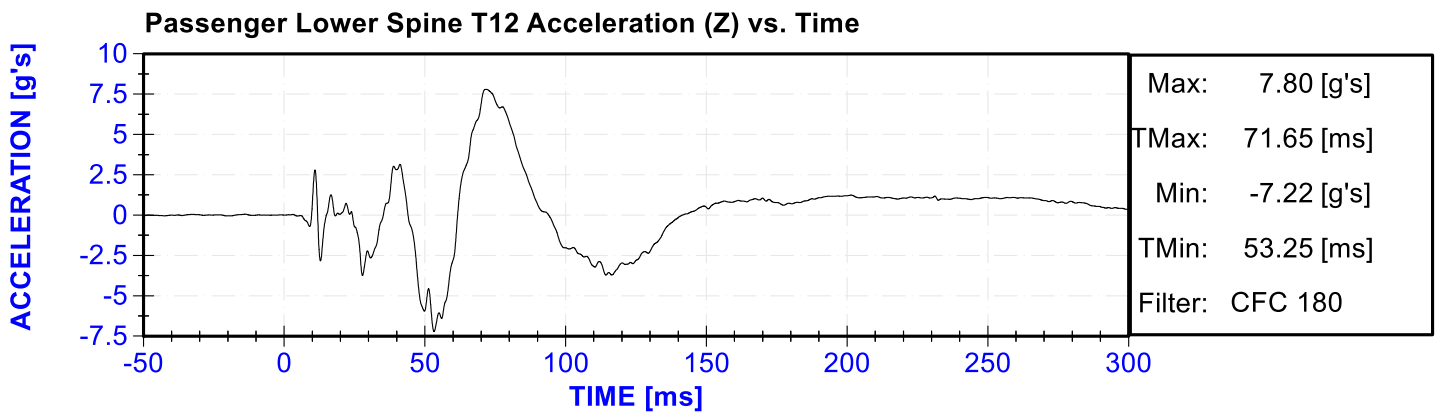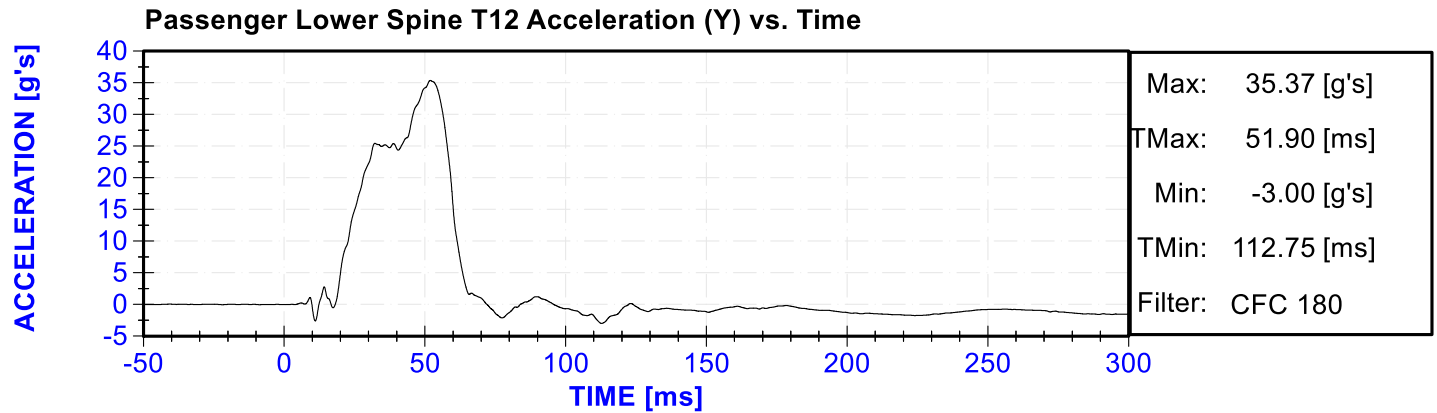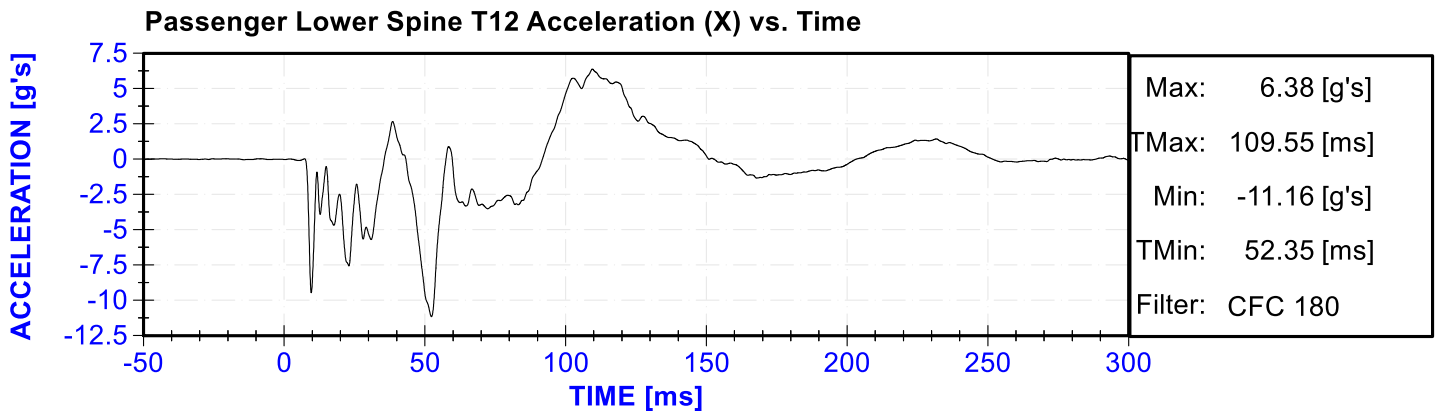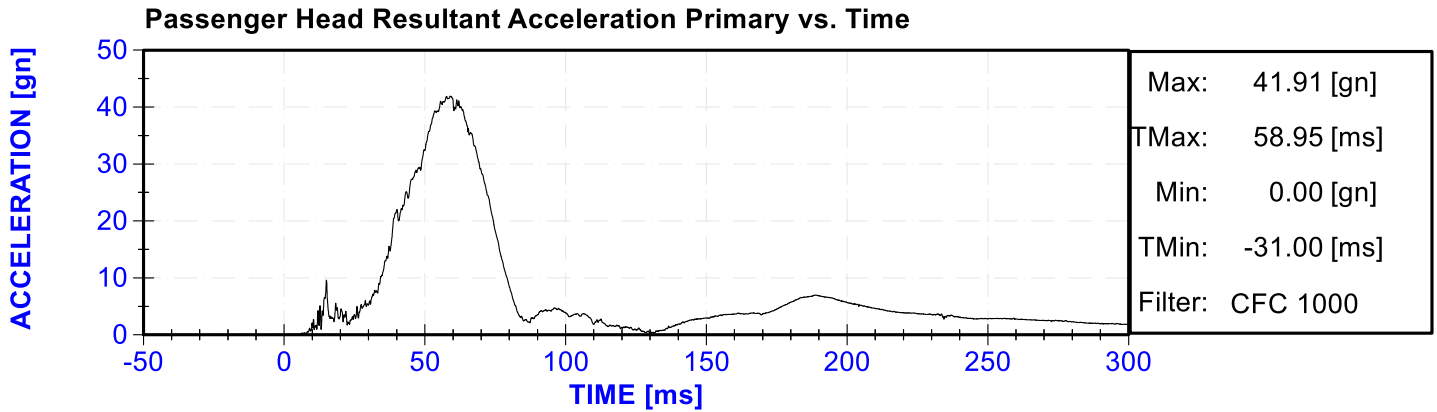

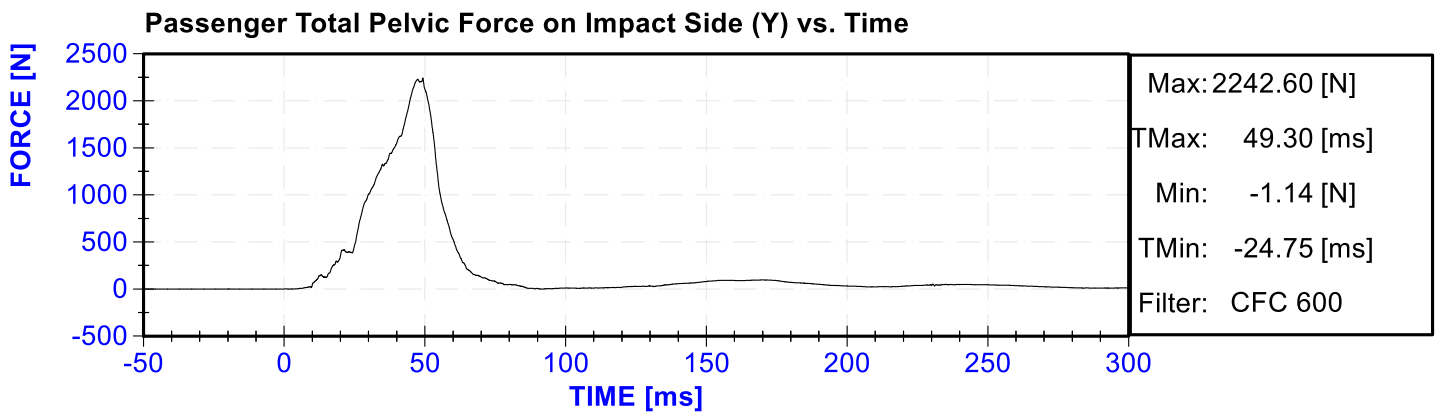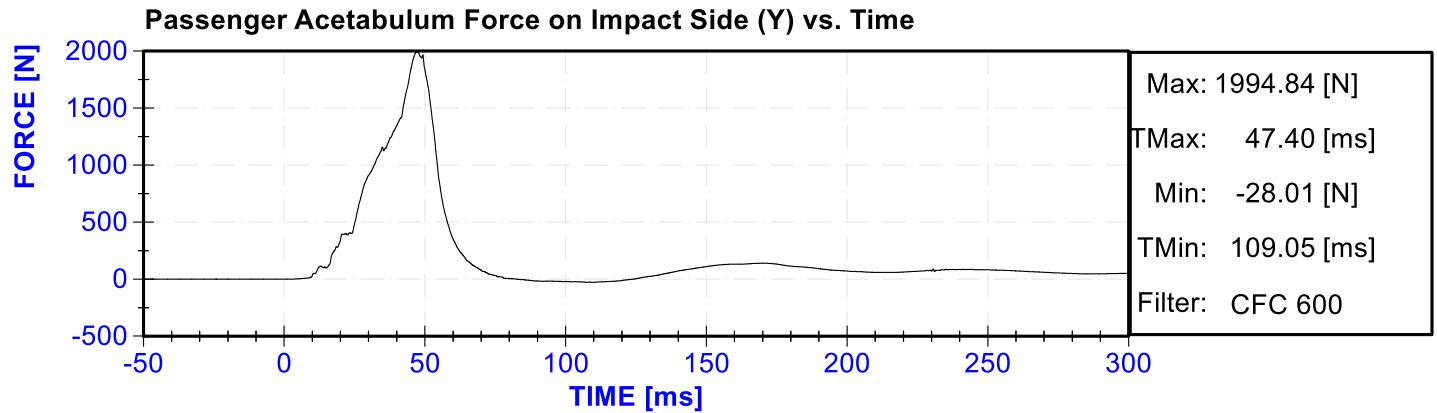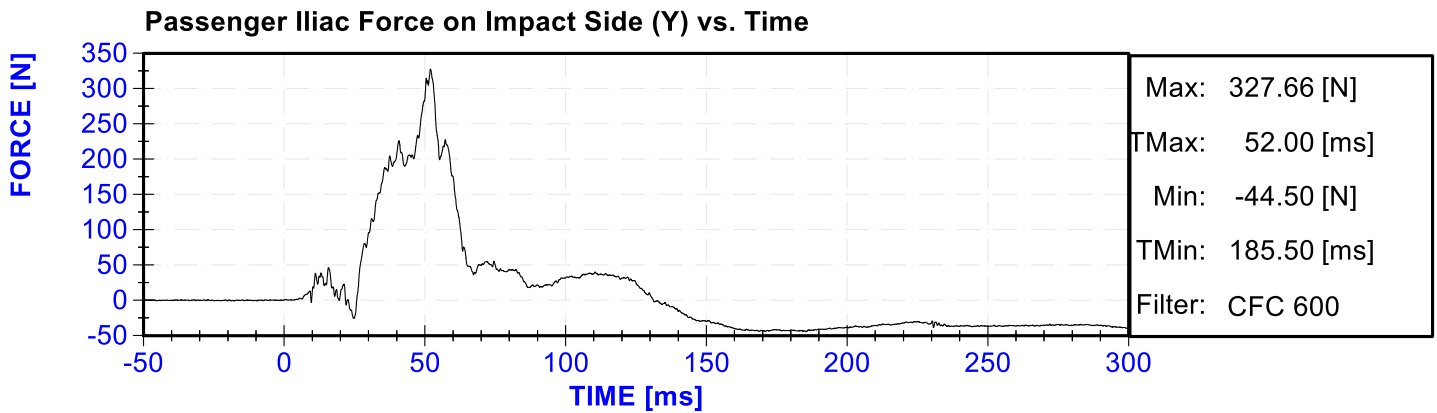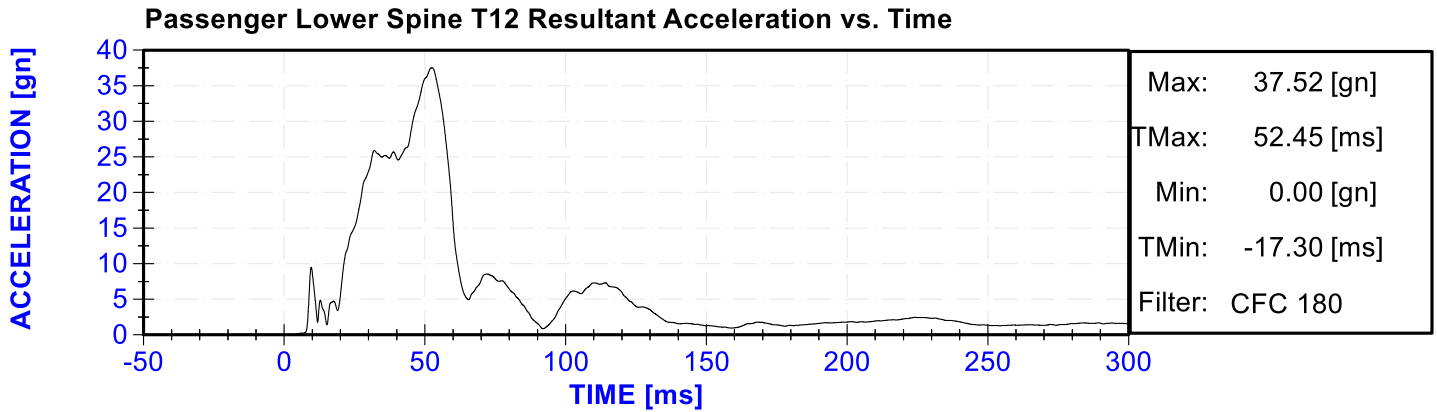

APPENDIX C

DUMMY PERFORMANCE CALIBRATION TEST DATA

CALIBRATION TEST RESULTS

PRE-TEST

EUROSID 2 (ES-2RE) MALE – DRIVER ATD

SERIAL NO: F033

(CONFIGURED FOR LEFT SIDE IMPACT)




External Measurements - EuroSID-2re


Technician: K. Brogan

Date: 3/11/2021

Dummy Serial Number: F033

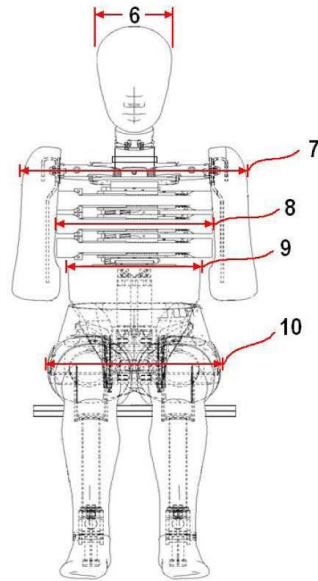

FRONT VIEW

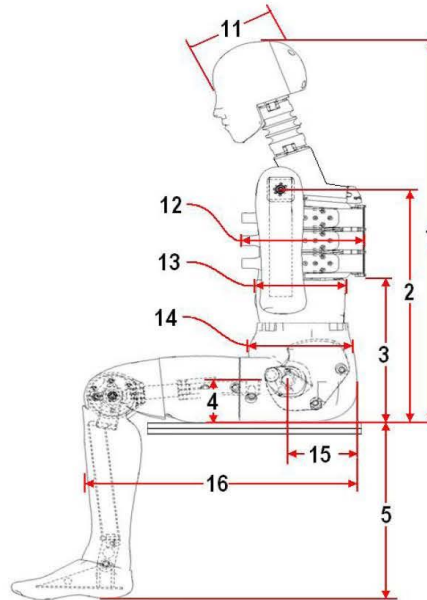

SIDE VIEW

Dim. No.	Description	Specification (mm)		Result (mm)	Pass/Fail
1	Sitting Height	900	918	912	Pass
2	Seat to Shoulder Joint	558	572	569	Pass
3	Seat to Lower Face of Thoracic Spine Box	346	356	352	Pass
4	Seat to Hip Joint (center of bolt)	97	103	98	Pass
5	Sole to Seat, Sitting	333	451	426	Pass
6	Head Width	152	158	154	Pass
7	Shoulder/Arm Width	461	479	472	Pass
8	Thorax Width	322	332	329	Pass
9	Abdomen Width	273	287	285	Pass
10	Pelvis Lap Width	359	373	367	Pass
11	Head Depth	196	206	201	Pass
12	Thorax Depth	262	272	269	Pass
13	Abdomen Depth	194	204	201	Pass
14	Pelvis Depth	235	245	239	Pass
15	Back of Buttocks to Hip Joint (center of bolt)	150	160	155	Pass
16	Back of Buttocks to Front Knee	597	615	609	Pass


ATD Manufacturer	FTSS	Test Technician	D.Reinhard
ATD Serial Number	F033	Laboratory Supervisor	K. Brogan




Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21.0	Pass
Humidity	10	70	%	28.0	Pass
Resultant Acceleration	125	155	g's	145.6	Pass
Oscillation	0	15	%	2.48	Pass
Fore-Aft Acceleration	-15	15	g's	6.0	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
X Accelerometer	ENDEVCO 7264CT	AC-P63861	11/24/2020	5/25/2021
Y Accelerometer	ENDEVCO 7264CT	AC-P49216	11/24/2020	5/25/2021
Z Accelerometer	ENDEVCO 7264	AC-P51303	11/24/2020	5/25/2021

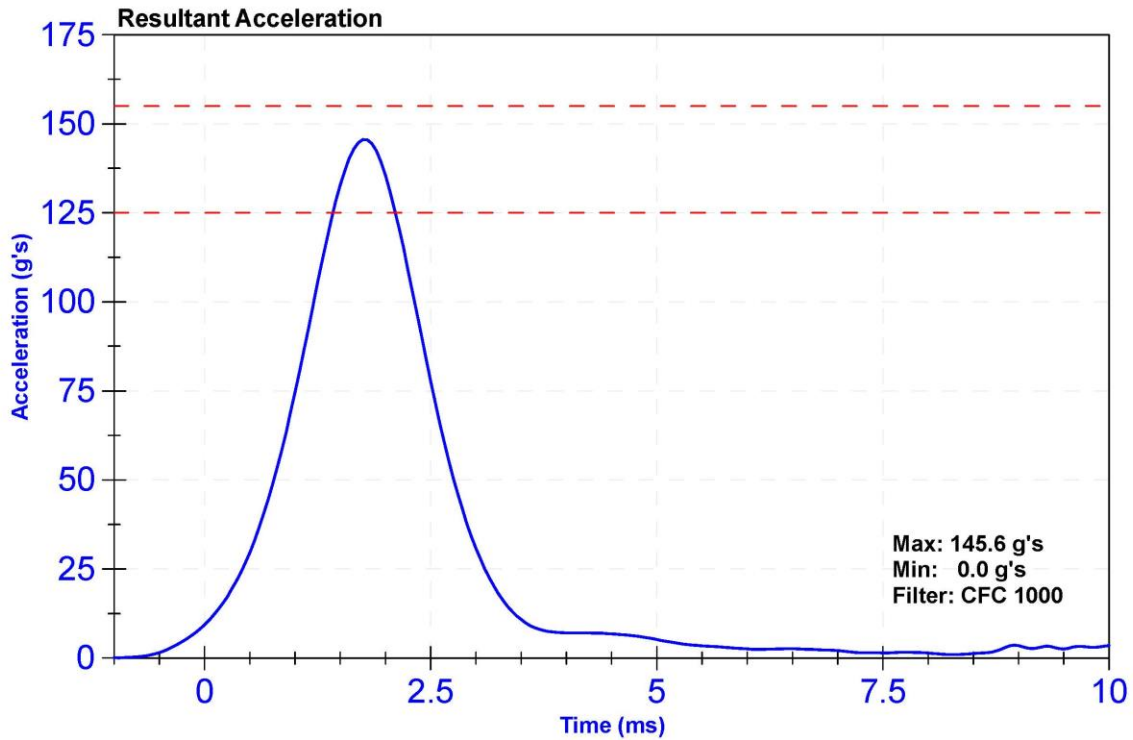

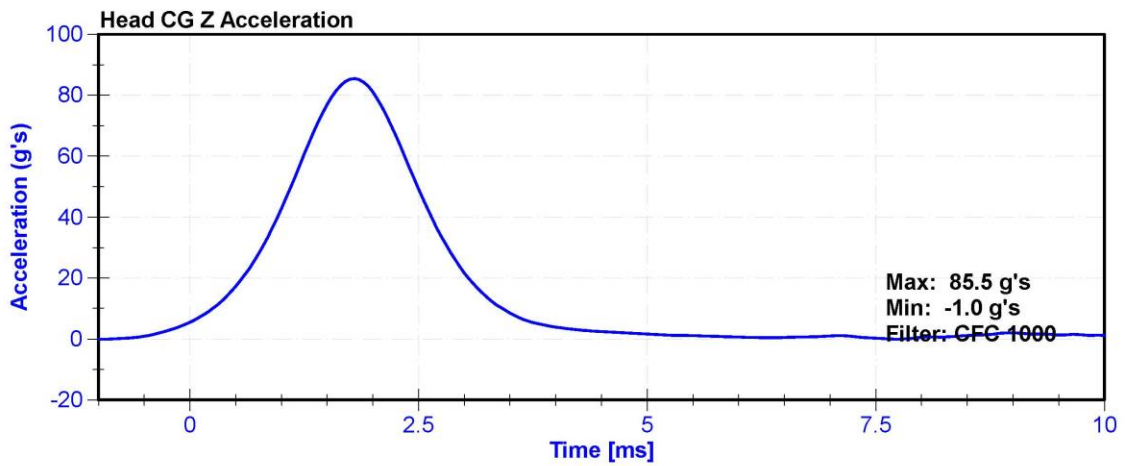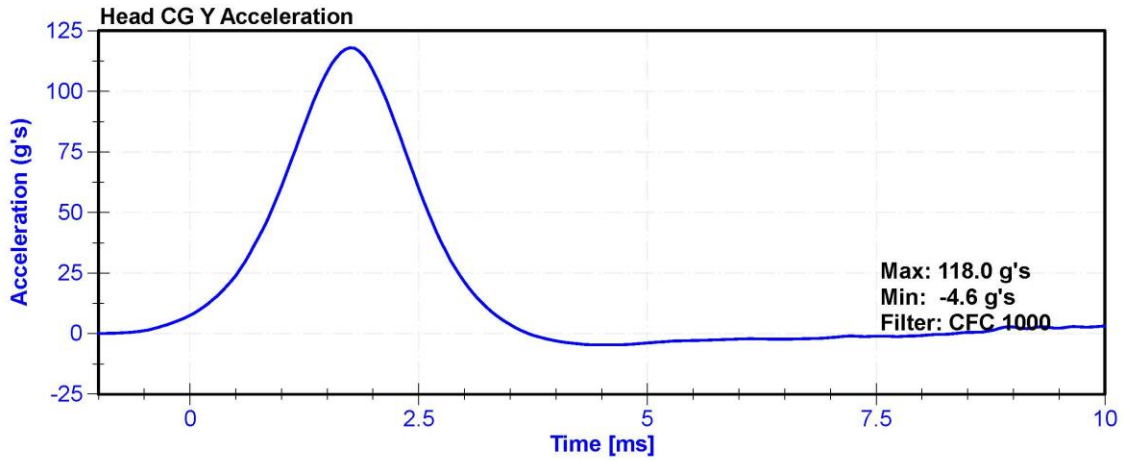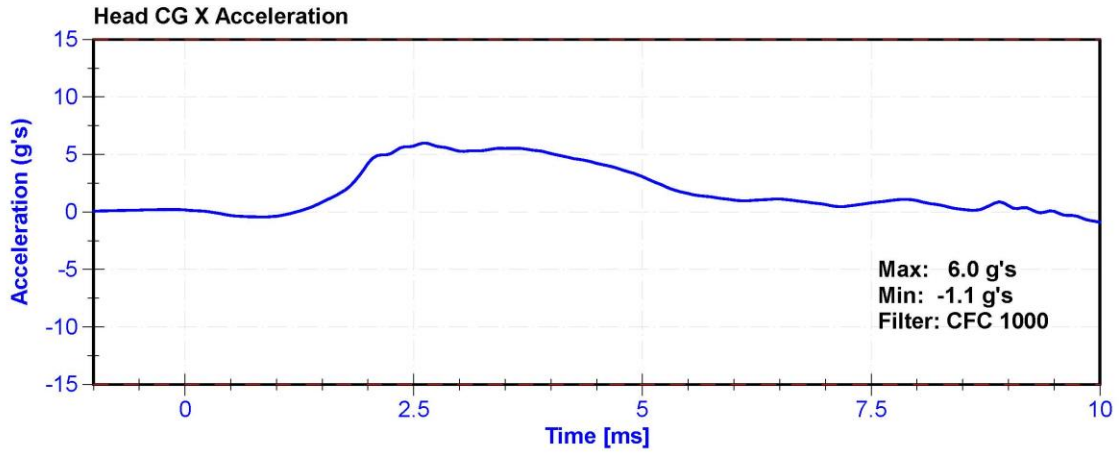


ATD Manufacturer	FTSS	Test Technician	D.Reinhard
ATD Serial Number	F033	Laboratory Supervisor	K. Brogan




Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21.3	Pass
Humidity	10	70	%	28	Pass
Velocity	3.3	3.5	m/s	3.38	Pass
Lateral Neck Rotation	49	59	deg	51.7	Pass
Time at Maximum Rotation	54	66	ms	54.7	Pass
Time of Rotation Decay from Maximum	53	88	ms	59.6	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	ENDEVCO 7231CT	AC-C16503	2/5/2021	2/5/2022
Front Pendulum Potentiometer	SP22G	DS-094	8/18/2020	8/18/2021
Headform Potentiometer	SP22G	DS-095	8/18/2020	8/18/2021

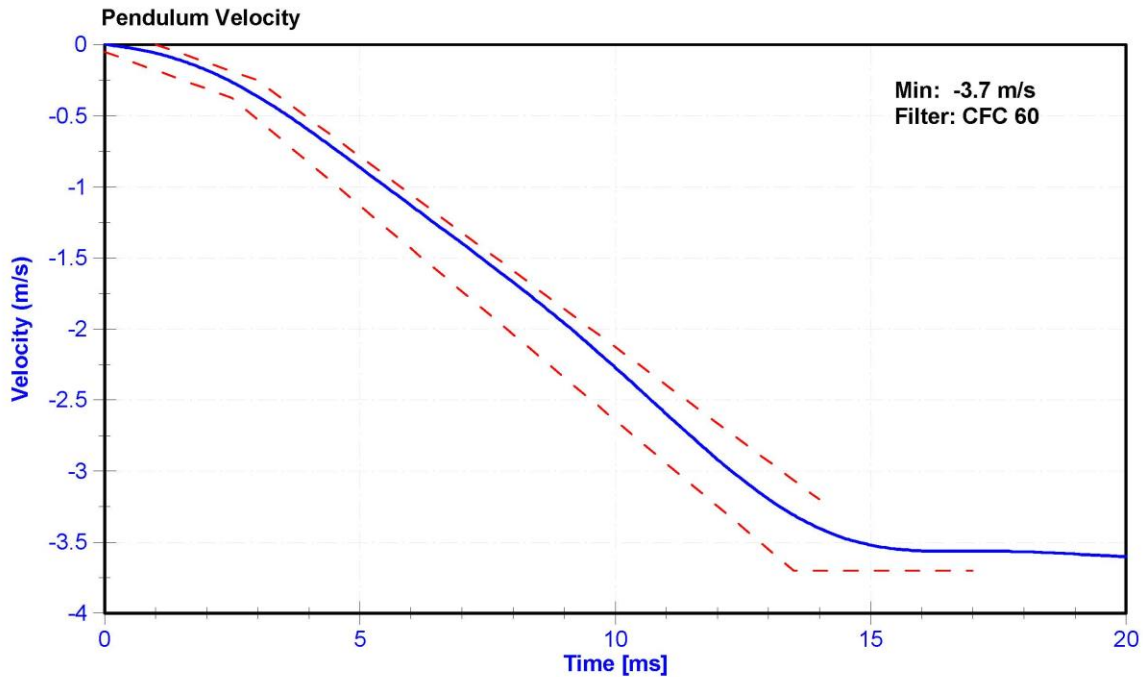

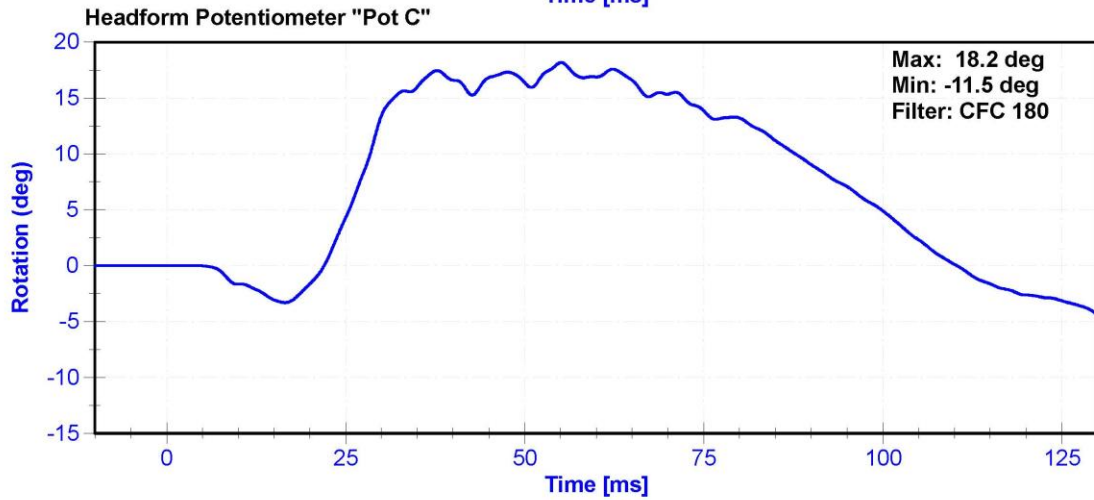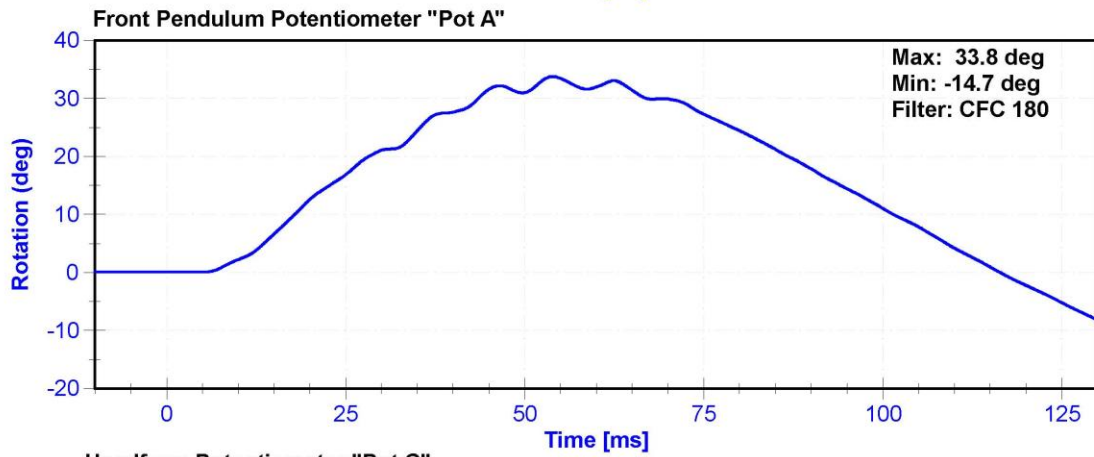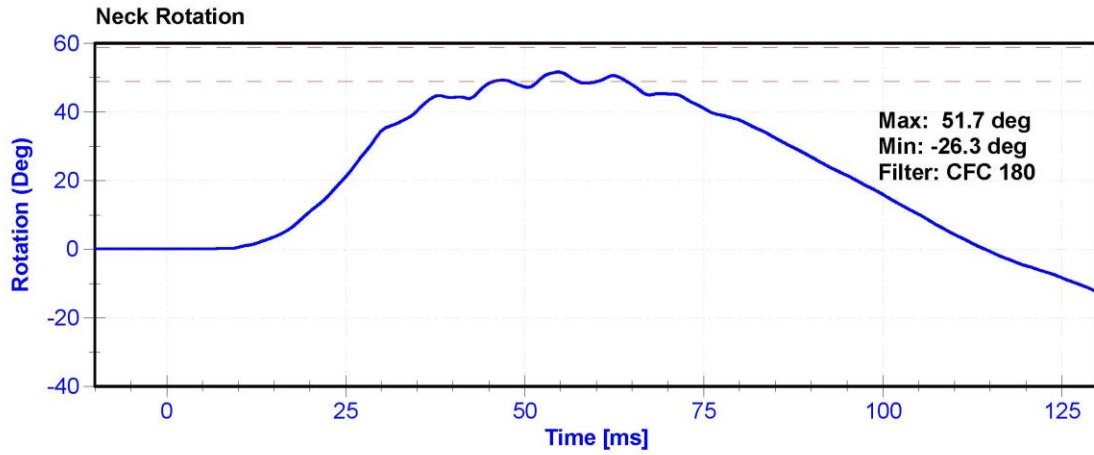


ATD Manufacturer	FTSS	Test Technician	D.Reinhard
ATD Serial Number	F033	Laboratory Supervisor	K. Brogan

Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	20.9	Pass
Humidity	10	70	%	28.0	Pass
Velocity	4.2	4.4	m/s	4.34	Pass
Probe Acceleration	7.5	10.5	g's	10.07	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Probe Accelerometer	MSI 64C-2000	A278994	12/3/2020	12/3/2021

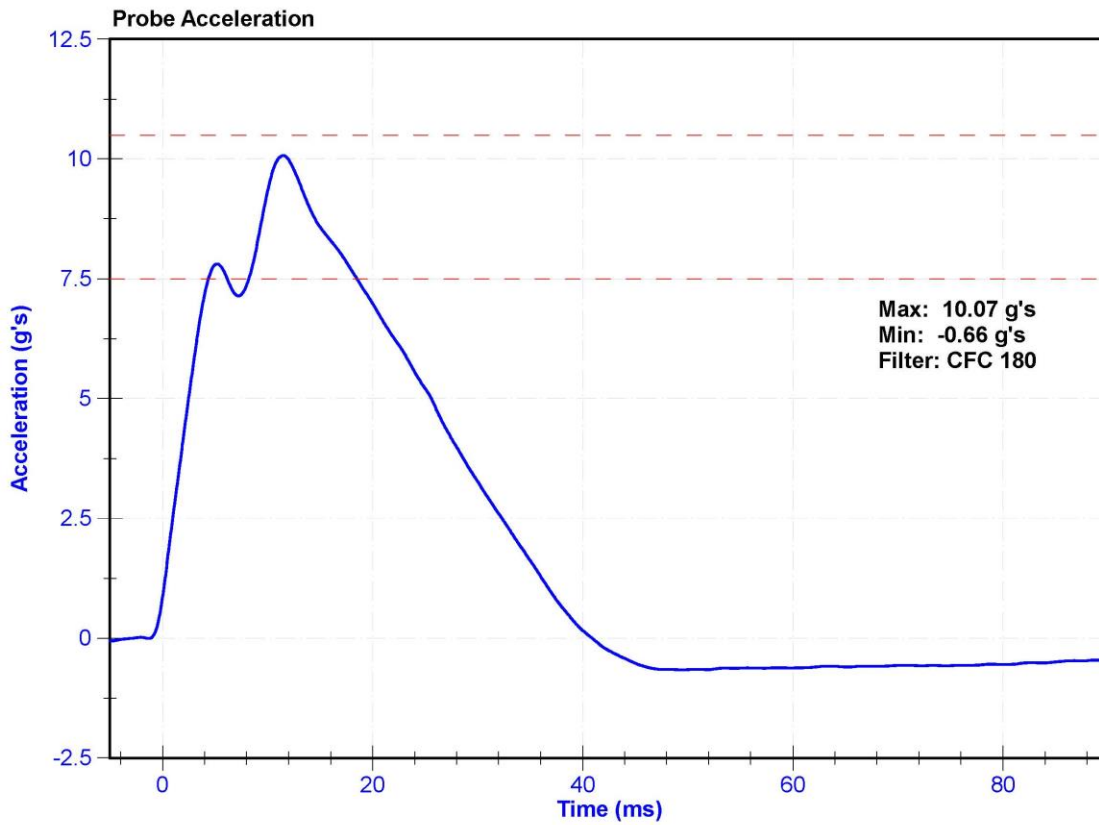


ATD Manufacturer	FTSS	Test Technician	D.Reinhard
ATD Serial Number	F033	Laboratory Supervisor	K. Brogan

Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21.5	Pass
Humidity	10	70	%	29.0	Pass
Rib Displacement	36	40	mm	37.3	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Rib Potentiometer	Honeywell MLT-38000203	DS-179GFE	11/25/2020	5/26/2021

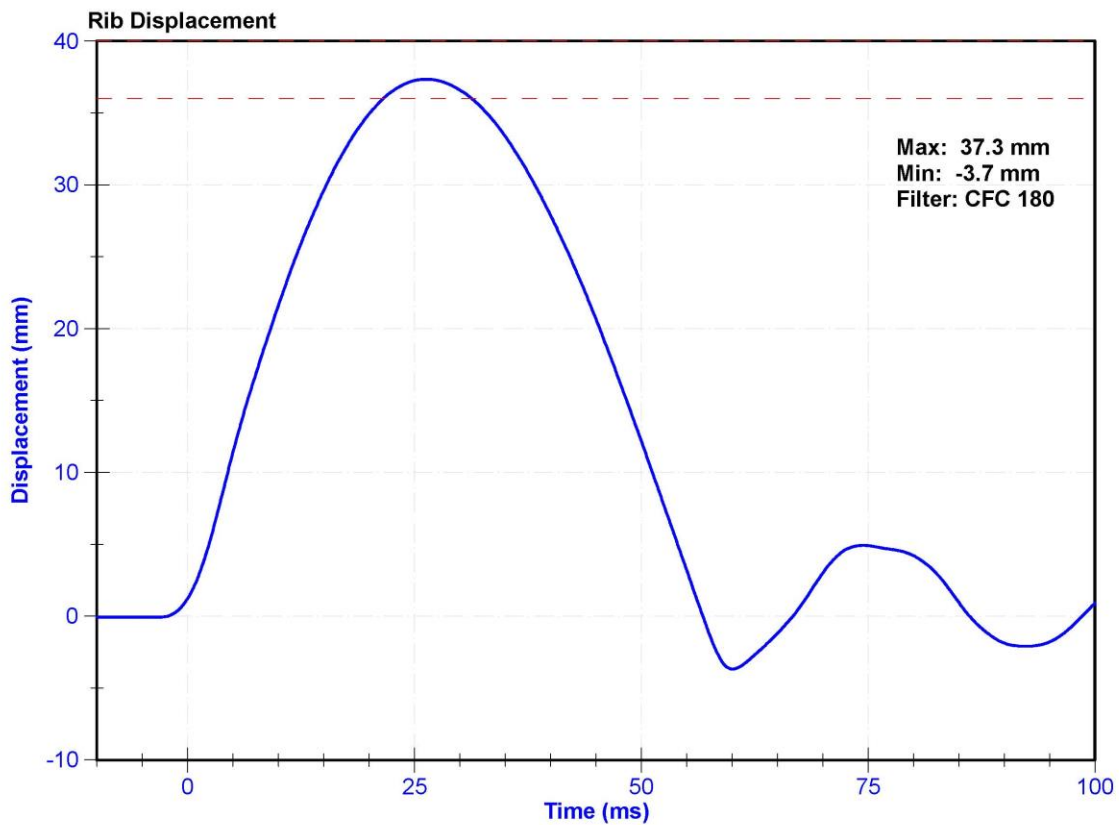


ATD Manufacturer	FTSS	Test Technician	D.Reinhard
ATD Serial Number	F033	Laboratory Supervisor	K. Brogan

Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21.5	Pass
Humidity	10	70	%	29.0	Pass
Rib Displacement	46	51	mm	48.7	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Rib Potentiometer	Honeywell MLT-38000203	DS-179GFE	11/25/2020	5/26/2021

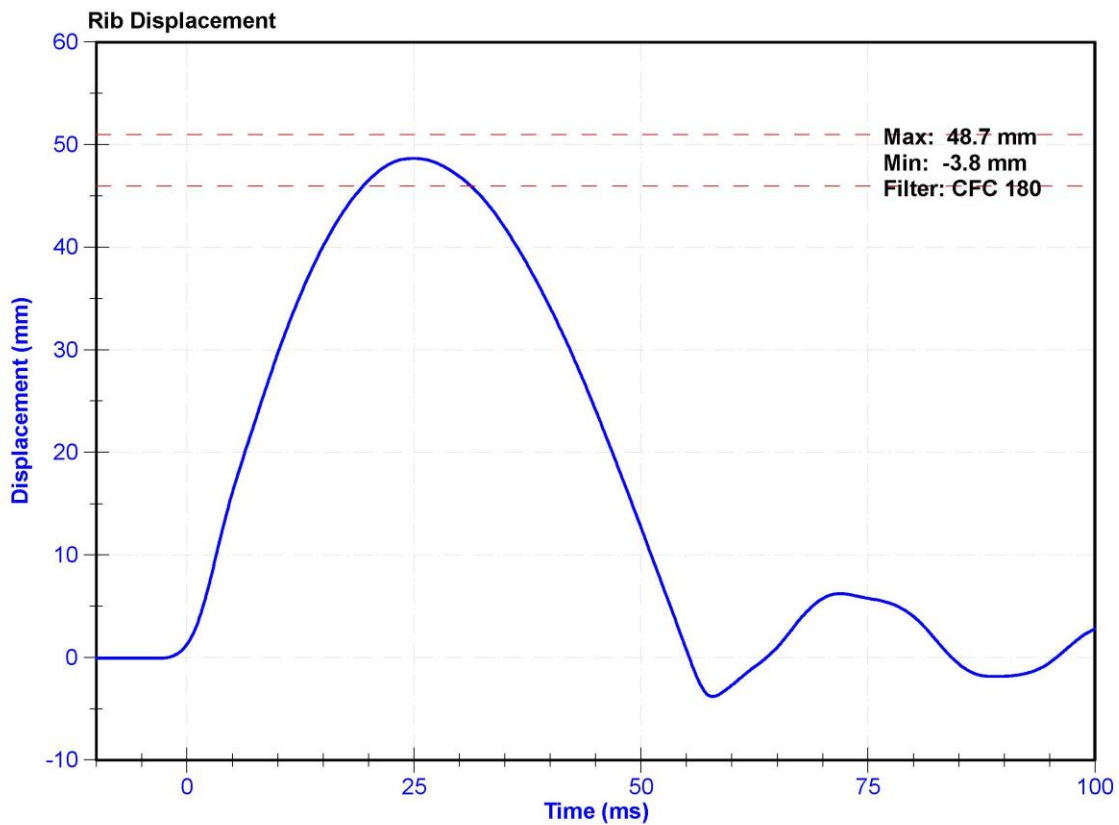


ATD Manufacturer	FTSS	Test Technician	D.Reinhard
ATD Serial Number	F033	Laboratory Supervisor	K. Brogan

Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21.9	Pass
Humidity	10	70	%	27.0	Pass
Rib Displacement	36	40	mm	37.6	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Rib Potentiometer	Honeywell MLT-38000203	DS-185GFE	11/25/2020	5/26/2021

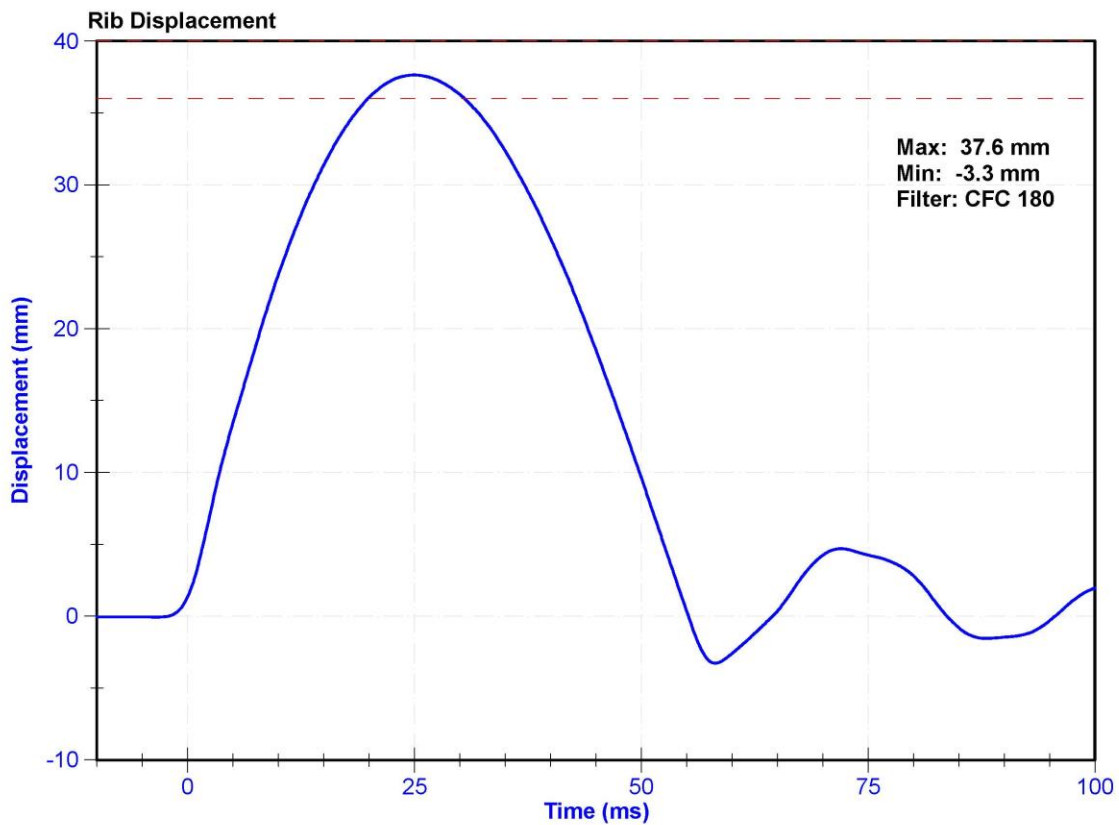


ATD Manufacturer	FTSS	Test Technician	D.Reinhard
ATD Serial Number	F033	Laboratory Supervisor	K. Brogan

Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21.7	Pass
Humidity	10	70	%	29.0	Pass
Rib Displacement	46	51	mm	48.8	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Rib Potentiometer	Honeywell MLT-38000203	DS-185GFE	11/25/2020	5/26/2021

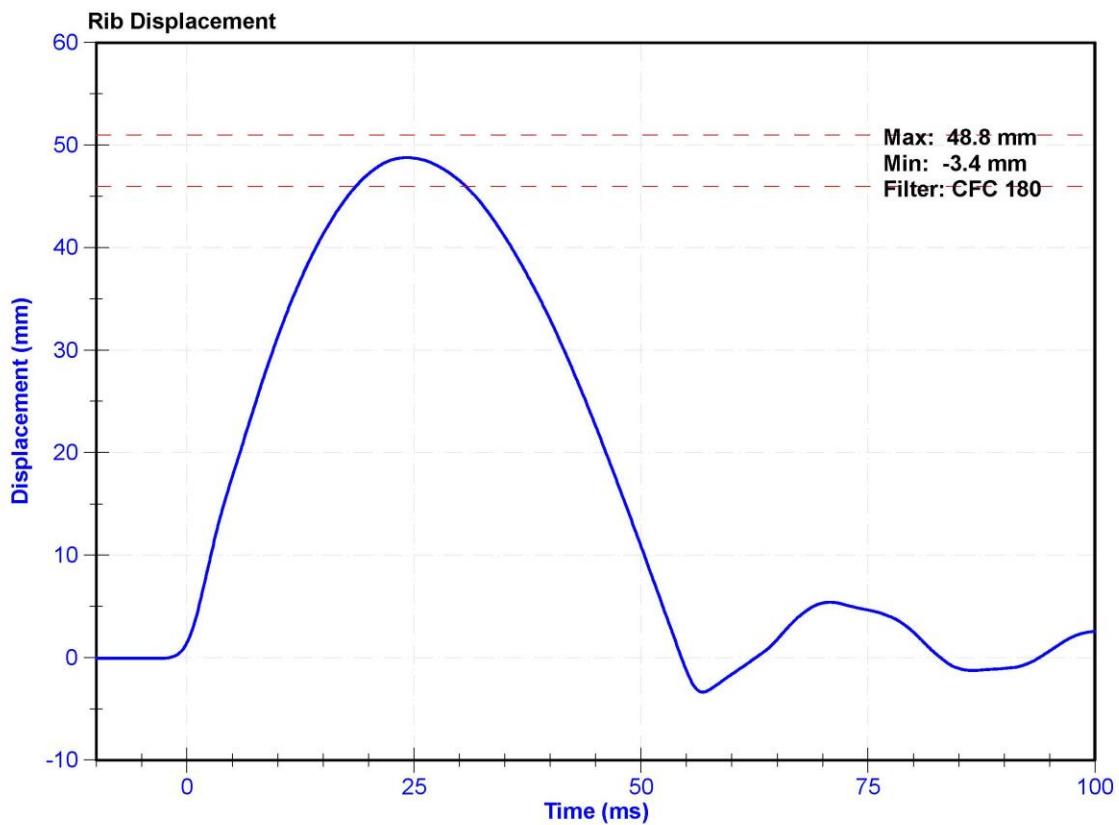


ATD Manufacturer	FTSS	Test Technician	D.Reinhard
ATD Serial Number	F033	Laboratory Supervisor	K. Brogan

Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21.7	Pass
Humidity	10	70	%	29.0	Pass
Rib Displacement	36	40	mm	37.9	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Rib Potentiometer	Honeywell MLT-38000203	DS-178GFE	11/25/2020	5/26/2021

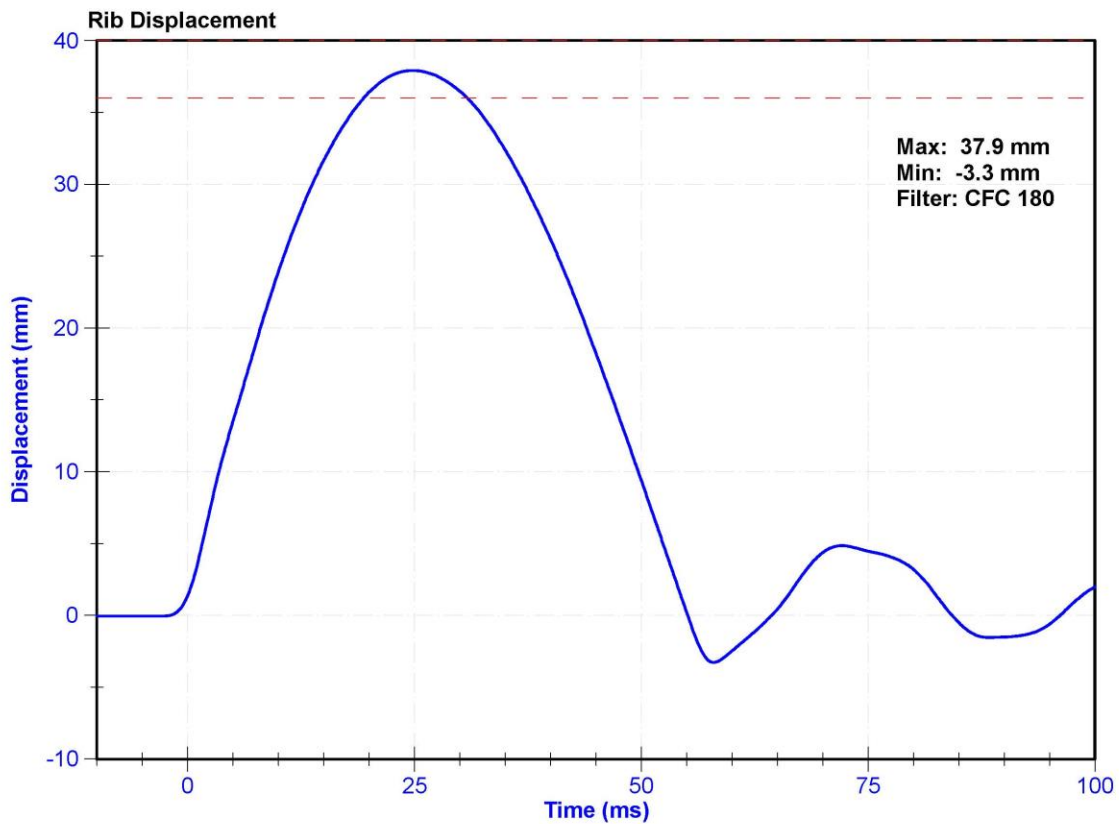


ATD Manufacturer	FTSS	Test Technician	D.Reinhard
ATD Serial Number	F033	Laboratory Supervisor	K. Brogan

Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21.9	Pass
Humidity	10	70	%	29.0	Pass
Rib Displacement	46	51	mm	49.1	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Rib Potentiometer	Honeywell MLT-38000203	DS-178GFE	11/25/2020	5/26/2021

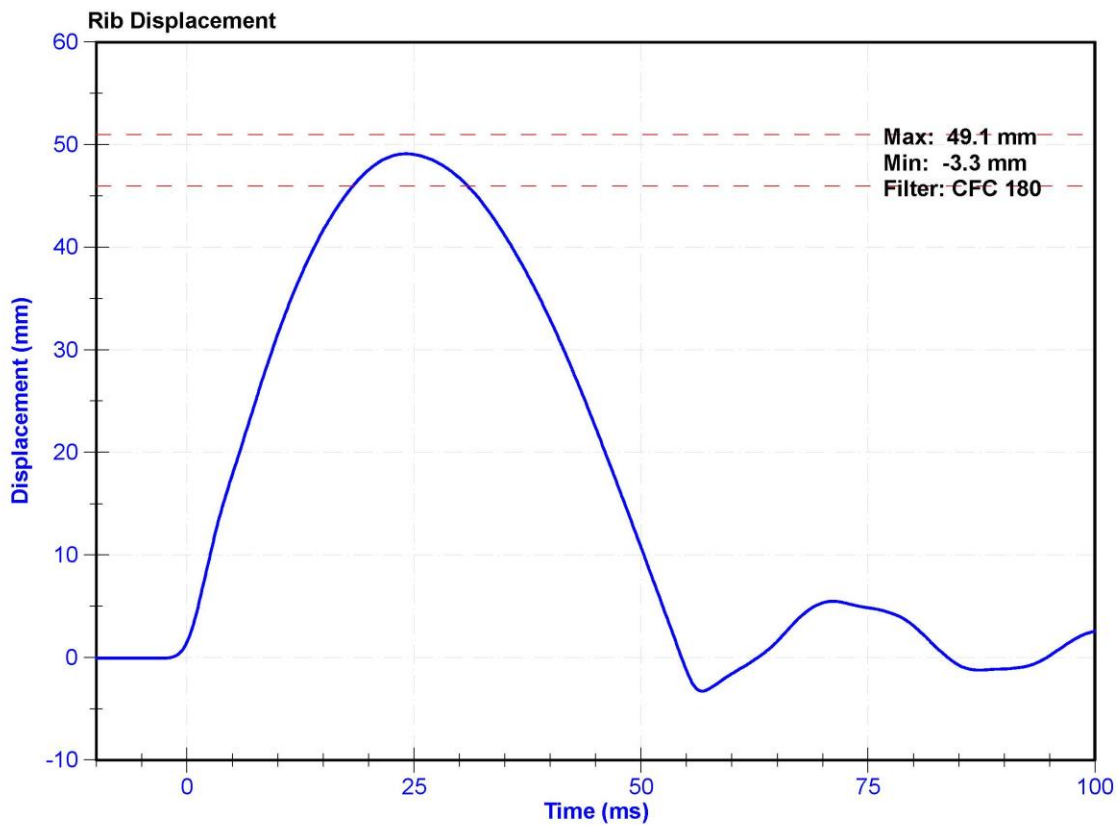


ATD Manufacturer	FTSS	Test Technician	S. Vacanti
ATD Serial Number	F033	Laboratory Supervisor	K. Brogan





Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	20.8	Pass
Humidity	10	70	%	24.0	Pass
Velocity	5.4	5.6	m/s	5.47	Pass
Resistive Force after 6ms	5100	6200	N	5809.8	Pass
Upper Thorax Rib Deflection	34	41	mm	37.3	Pass
Mid Thorax Rib Deflection	37	45	mm	41.2	Pass
Lower Thorax Rib Deflection	37	44	mm	41.4	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Probe Accelerometer	MSI 64C-2000	A278994	12/3/2020	12/3/2021
Upper Thorax Rib Potentiometer	Honeywell MLT-38000203	DS-179GFE	11/25/2020	5/26/2021
Middle Thorax Rib Potentiometer	Honeywell MLT-38000203	DS-185GFE	11/25/2020	5/26/2021
Lower Thorax Rib Potentiometer	Honeywell MLT-38000203	DS-178GFE	11/25/2020	5/26/2021

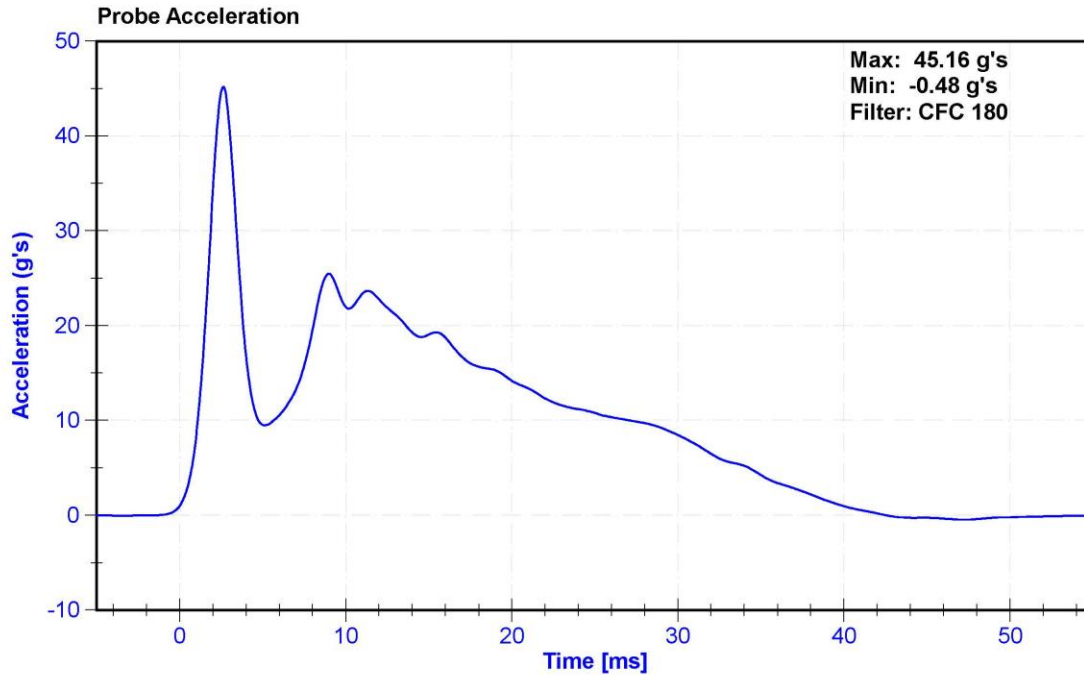

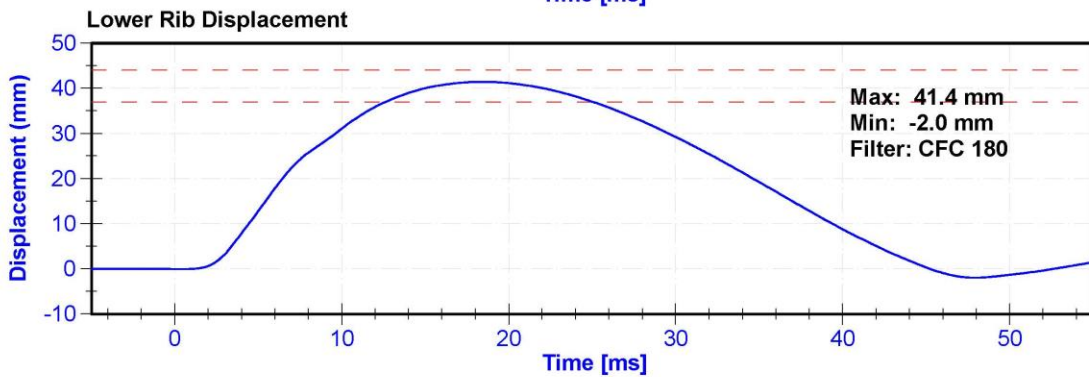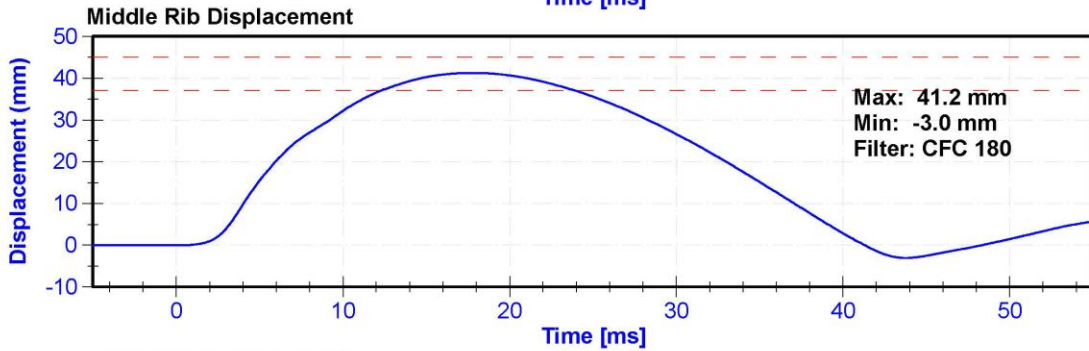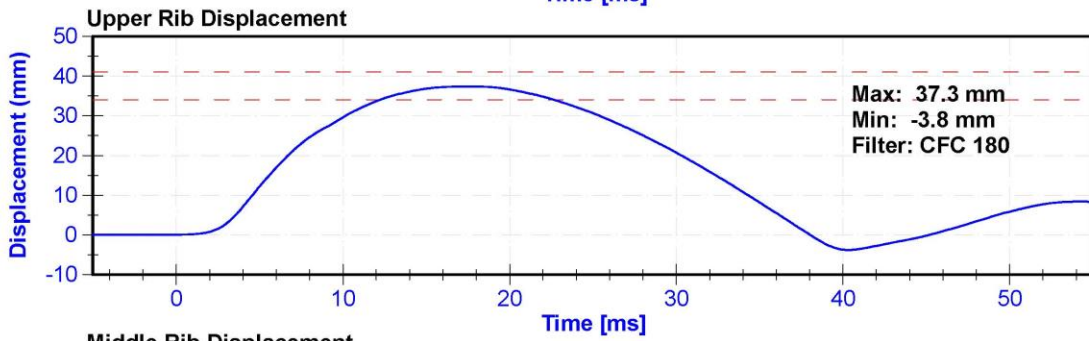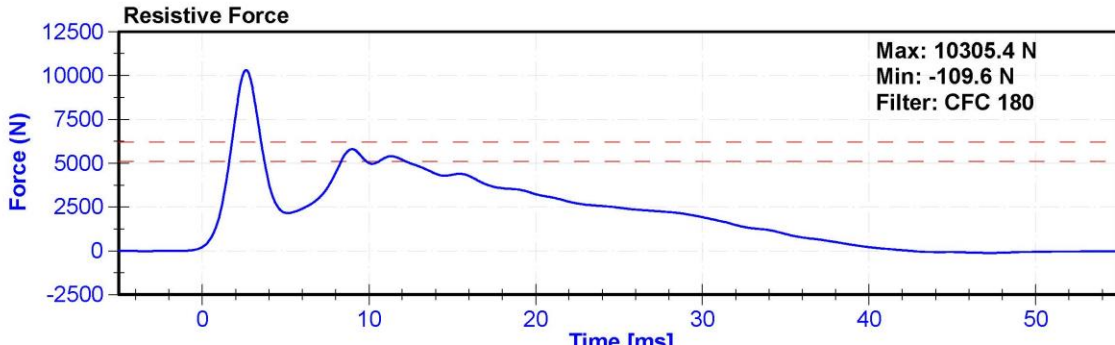


ATD Manufacturer	FTSS	Test Technician	S. Vacanti
ATD Serial Number	F033	Laboratory Supervisor	K.Brogan





Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	20.9	Pass
Humidity	10	70	%	24	Pass
Velocity	3.9	4.1	m/s	3.97	Pass
Combined Abdomen Force	2200	2700	N	2409.3	Pass
Time at Peak Abdomen Force	10.0	12.3	ms	11.00	Pass
Resistive Probe Force	4000	4800	N	4676.2	Pass
Time at Peak Resistive Force	10.6	13.0	ms	11.40	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	MSI 64C-2000	A278994	12/3/2020	12/3/2021
Front Abdomen Load Cell	FTSS 2631	LC-1509	11/10/2020	11/10/2021
Middle Abdomen Load Cell	DENTON 2631	LC-1508	11/10/2020	11/10/2021
Rear Abdomen Load Cell	FTSS 2631	LC-1507	11/10/2020	11/10/2021

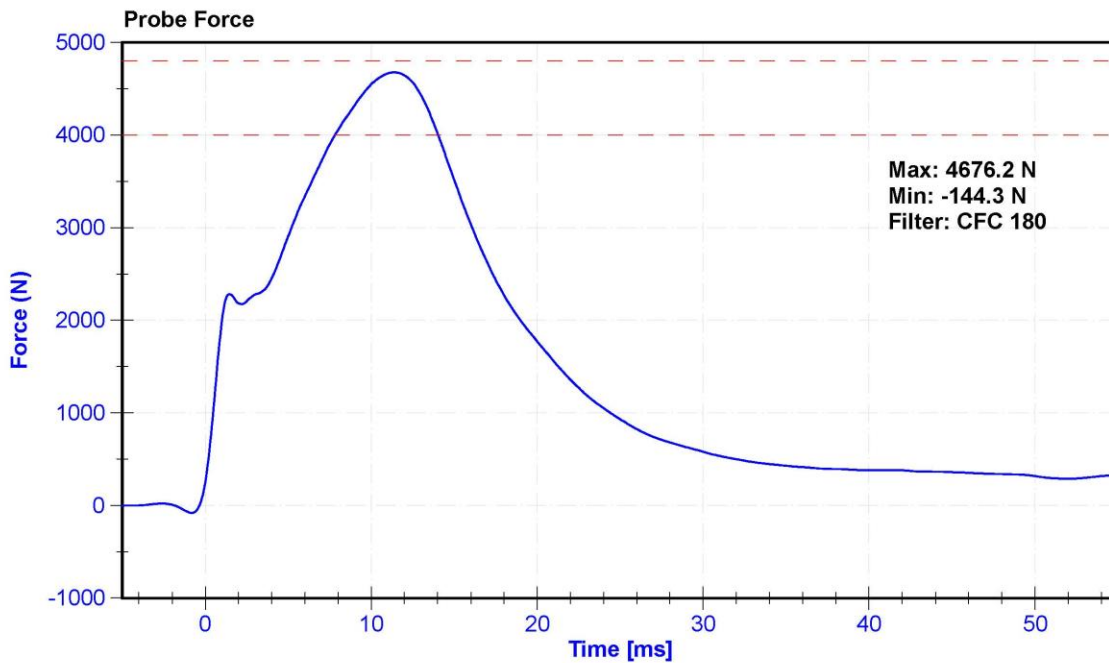

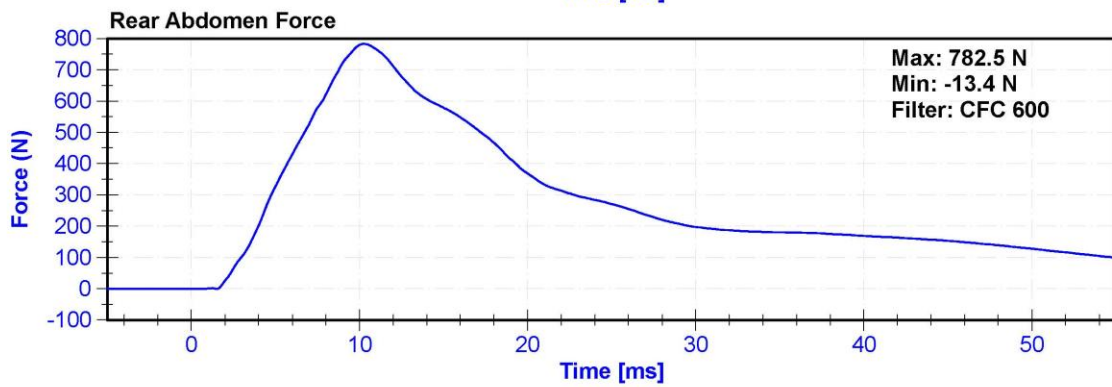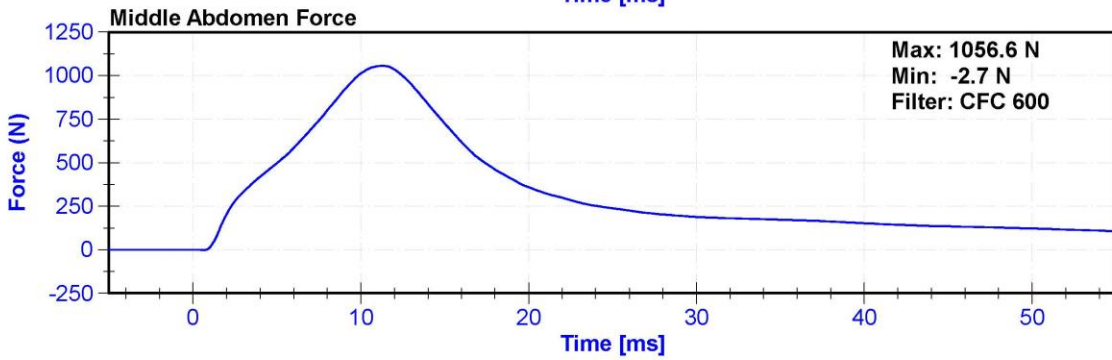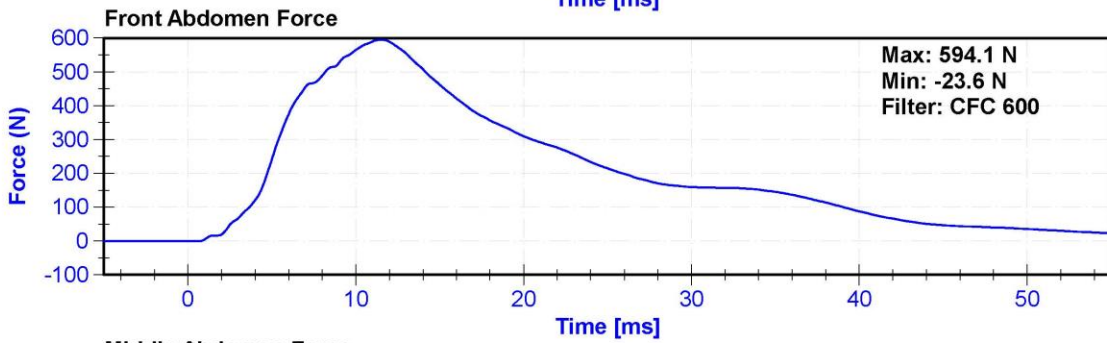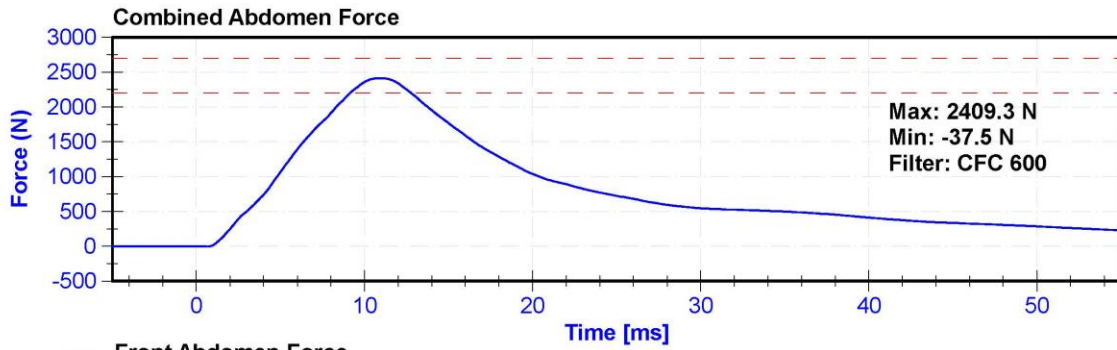



ATD Manufacturer	FTSS	Test Technician	D.Reinhard
ATD Serial Number	F033	Laboratory Supervisor	K. Brogan



Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21.2	Pass
Humidity	10	70	%	31.0	Pass
Velocity	5.95	6.15	m/s	5.964	Pass
Lateral Spine Rotation	45	55	deg	50.5	Pass
Time at Maximum Rotation	39	53	ms	47.4	Pass
Time of Decay to Zero Degrees	37	57	ms	37.6	Pass
Pulse within Corridor?	-	-	-		

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	ENDEVCO 7231CT	AC-C16503 Striker	2/5/2021	2/5/2022
Pendulum "A" Potentiometer	SP22G	DS-094	8/18/2020	8/18/2021
Condyle "B" Potentiometer	SP22G	DS-095	8/18/2020	8/18/2021

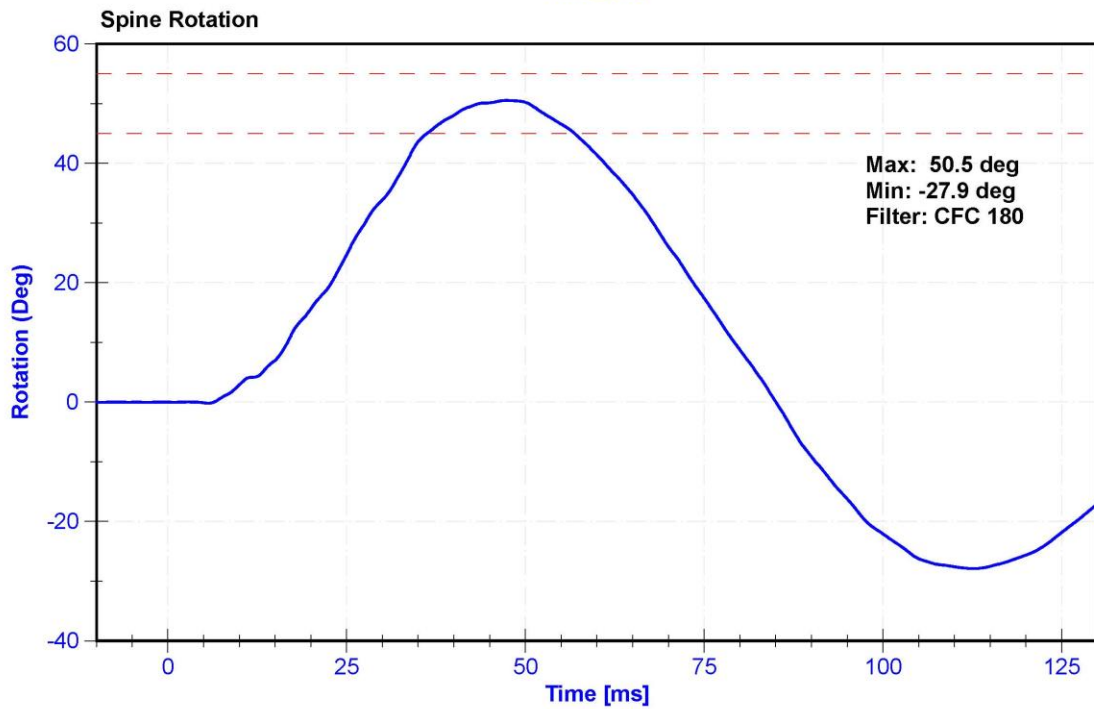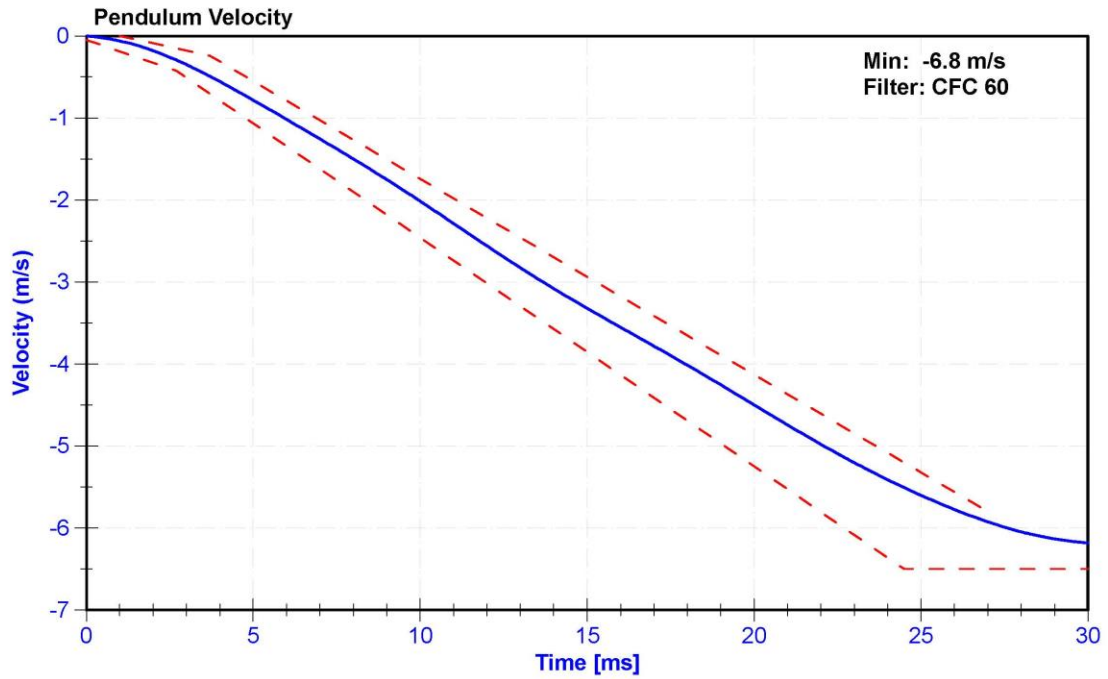

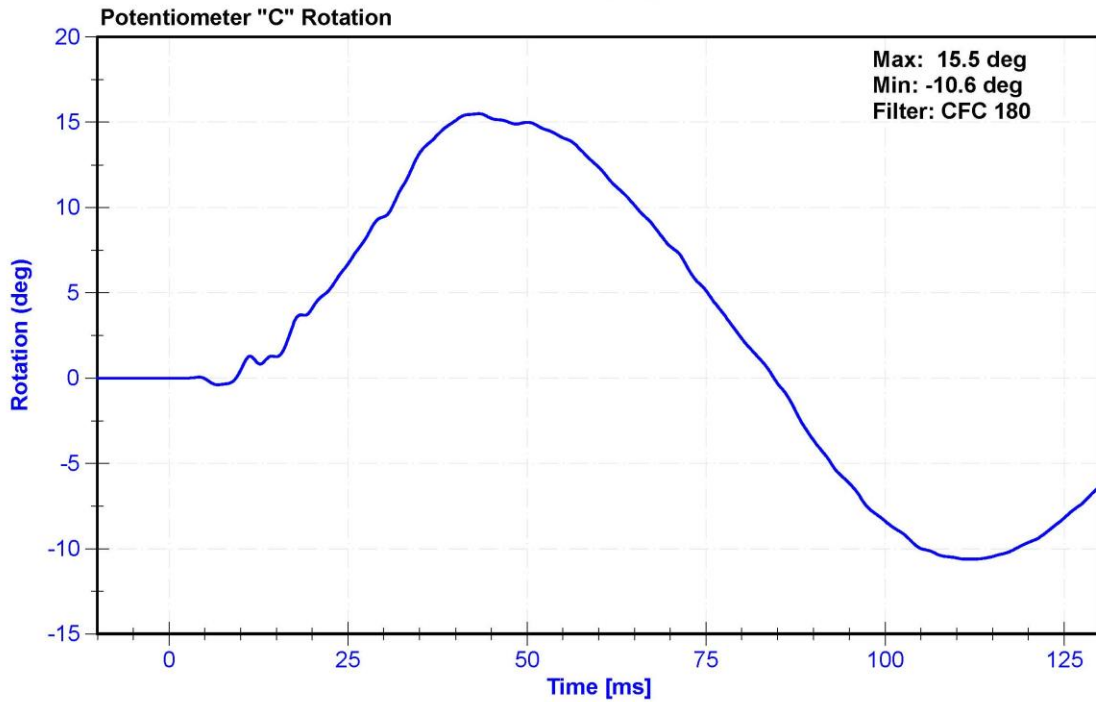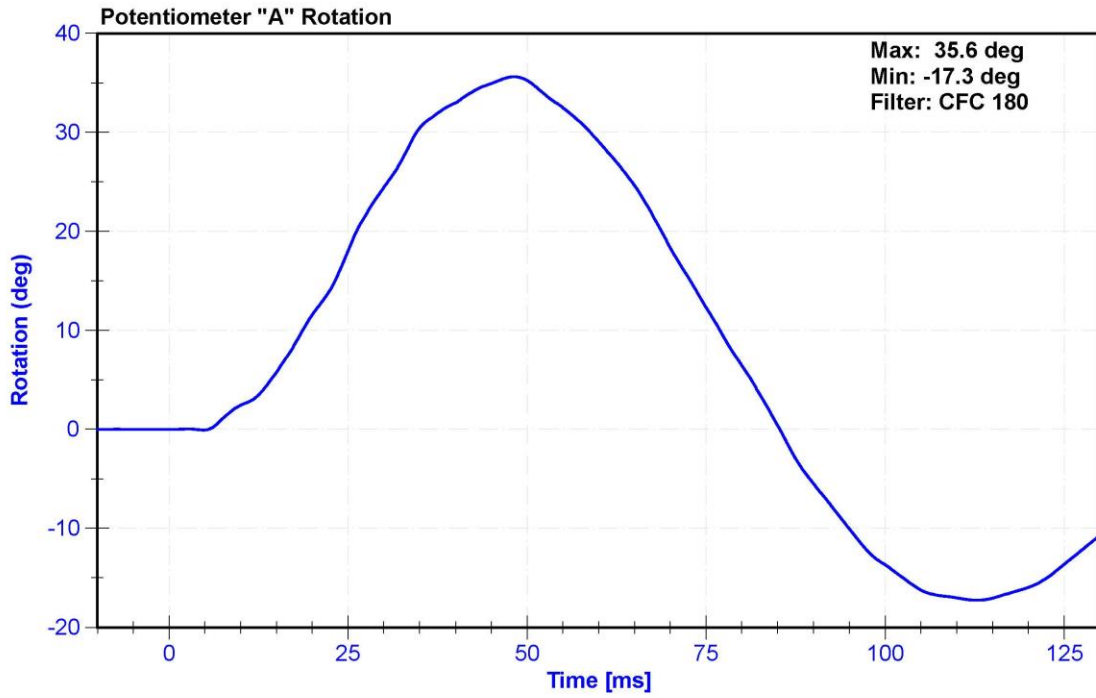


ATD Manufacturer	FTSS	Test Technician	S. Vacanti
ATD Serial Number	F033	Laboratory Supervisor	K. Brogan



Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	20.8	Pass
Humidity	10	70	%	24.0	Pass
Velocity	4.2	4.4	m/s	4.39	Pass
Resistive Force	4700	5400	N	5378.4	Pass
Time at Peak Resistive Force	11.8	16.1	ms	12.50	Pass
Pubic Force	-1590	-1230	N	-1287.8	Pass
Time at Peak Pubic Force	12.2	17.0	ms	13.05	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	MSI 64C-2000	A278994	12/3/2020	12/3/2021
Pubic Load Cell	Denton 3096JFL	LC-464fy	7/23/2020	7/23/2021

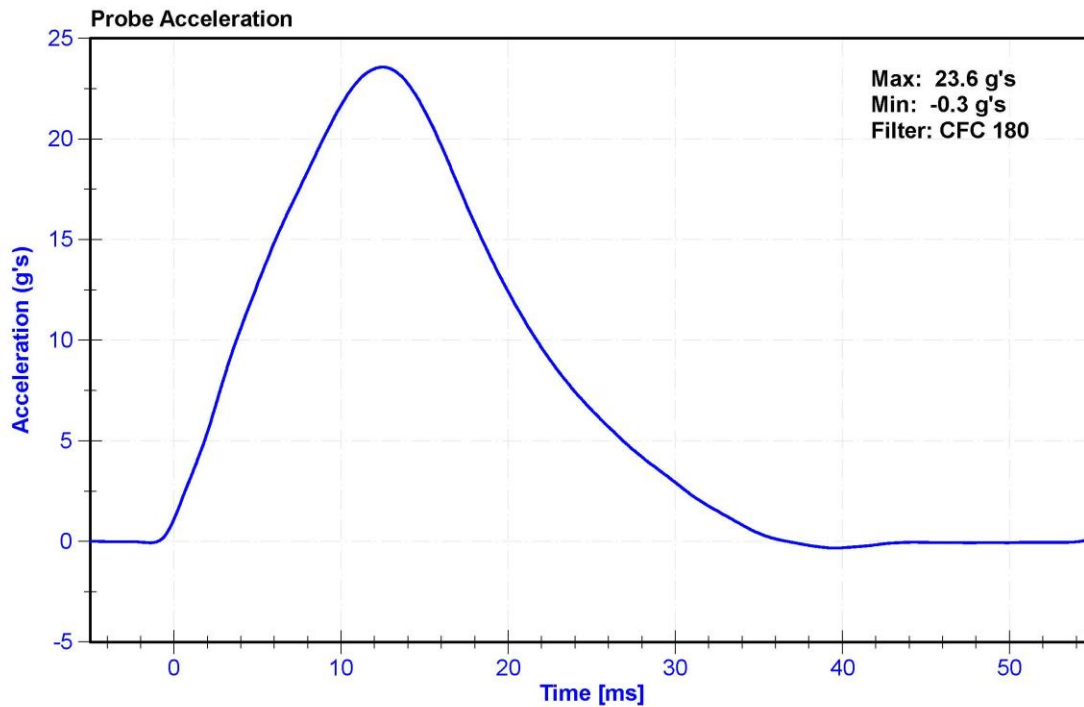

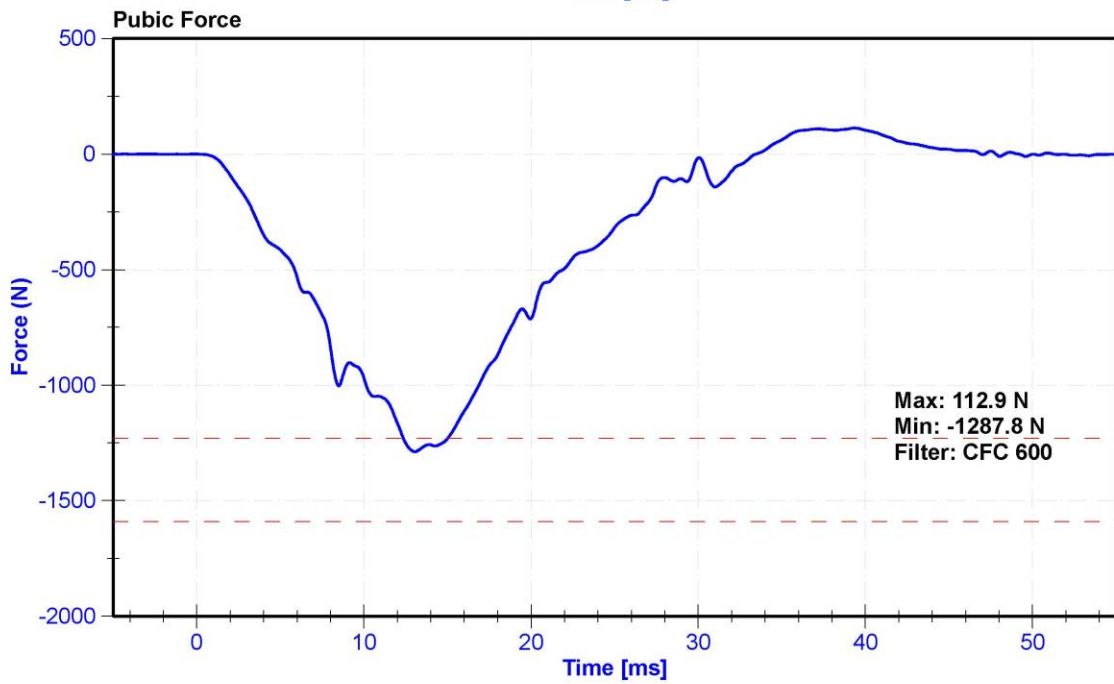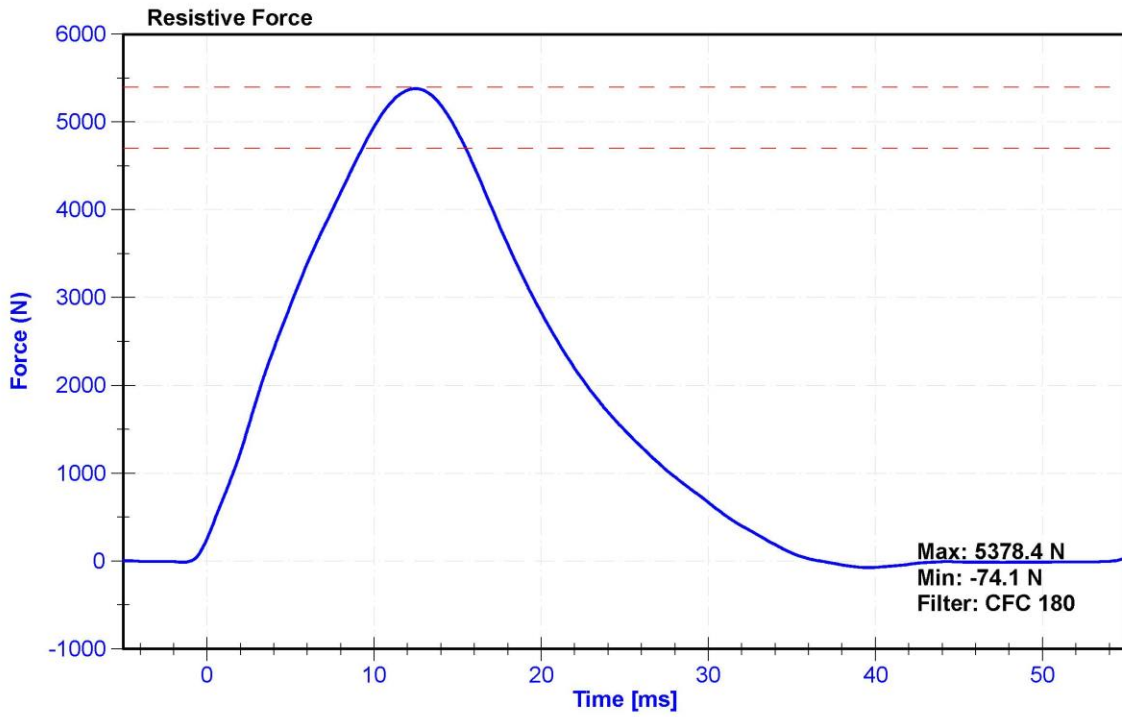

CALIBRATION TEST RESULTS

PRE-TEST

SID-IIS 5TH PERCENTILE FEMALE - PASSENGER ATD

SERIAL No: 300

(CONFIGURED FOR LEFT SIDE IMPACT)




External Measurements - SID-IIs

Technician: K. Brogan

Date: 03/10/2021

Dummy Serial Number: 300

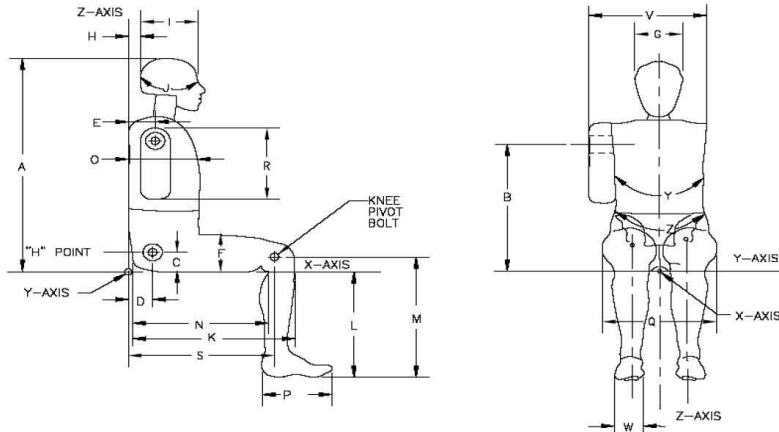

Symbol	Description	Specification (mm)		Result (mm)	Pass/Fail
A	Sitting Height	772	788	782	Pass
B	Shoulder Pivot Height	437	453	446	Pass
C	H-point Height	79	89	84	Pass
D	H-point from seatback	141	151	145	Pass
E	Shoulder Pivot from Backline	97	107	104	Pass
F	Thigh Clearance	119	135	126	Pass
G	Head Breadth	140	148	144	Pass
H	Head Back from Backline	40	46	43	Pass
I	Head Depth	178	188	186	Pass
J	Head Circumference	541	551	544	Pass
K	Buttock to Knee Length	514	540	532	Pass
L	Popliteal Height	343	369	361	Pass
M	Knee Pivot to floor height	392	409	398	Pass
N	Buttock Popliteal Length	416	442	430	Pass
O	Chest Depth w/o jacket	195	211	208	Pass
P	Foot Length	216	232	220	Pass
Q	Hip Breadth (w/pelvic plugs)	313	323	317	Pass
R	Arm Length	249	259	254	Pass
S	Knee Joint to seatback	477	493	484	Pass
V	Shoulder Width	341	357	352	Pass
W	Foot Width	78	94	83	Pass
Y	Chest Circumference w/jacket	851	881	875	Pass
Z	Waist Circumference	761	791	773	Pass


ATD Manufacturer	FTSS	Test Technician	D.Reinhard
ATD Serial Number	300	Laboratory Supervisor	K. Brogan




Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	20.9	Pass
Humidity	10	70	%	29	Pass
Resultant Acceleration	115	137	g's	123.9	Pass
Oscillation	0	15	%	1.2	Pass
Fore-Aft Acceleration	-15	15	g's	-5.8	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
X Accelerometer	ENDEVCO 7264CT	AC-P59018	11/10/2020	5/11/2021
Y Accelerometer	ENDEVCO 7264	AC-P79189	11/10/2020	5/11/2021
Z Accelerometer	ENDEVCO 7264CT	AC-P58777	11/10/2020	5/11/2021

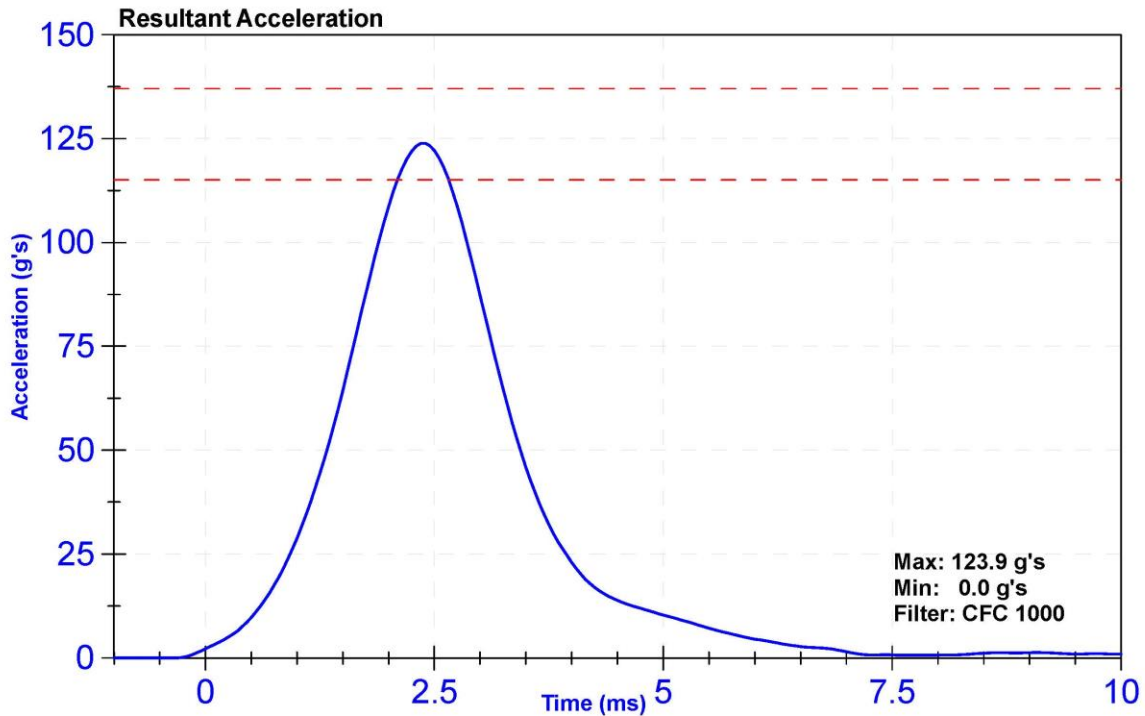

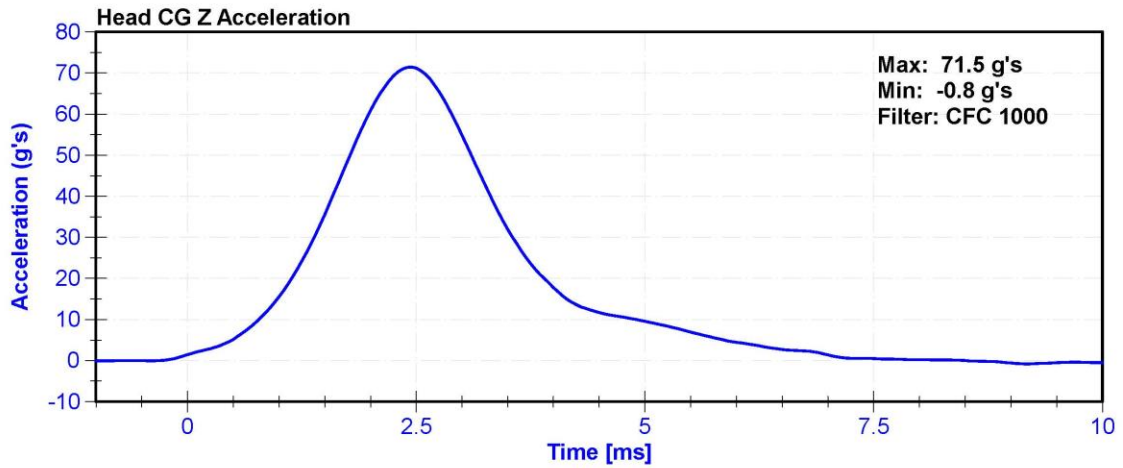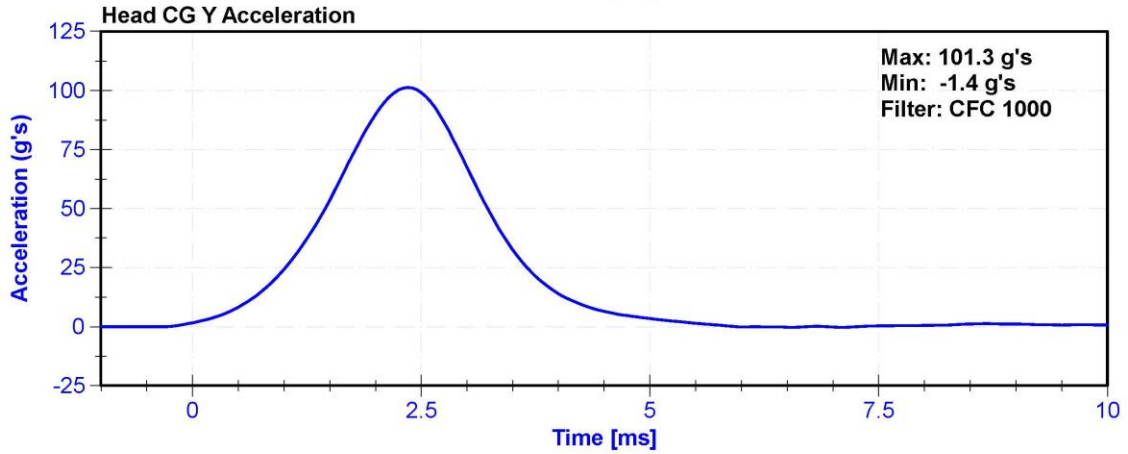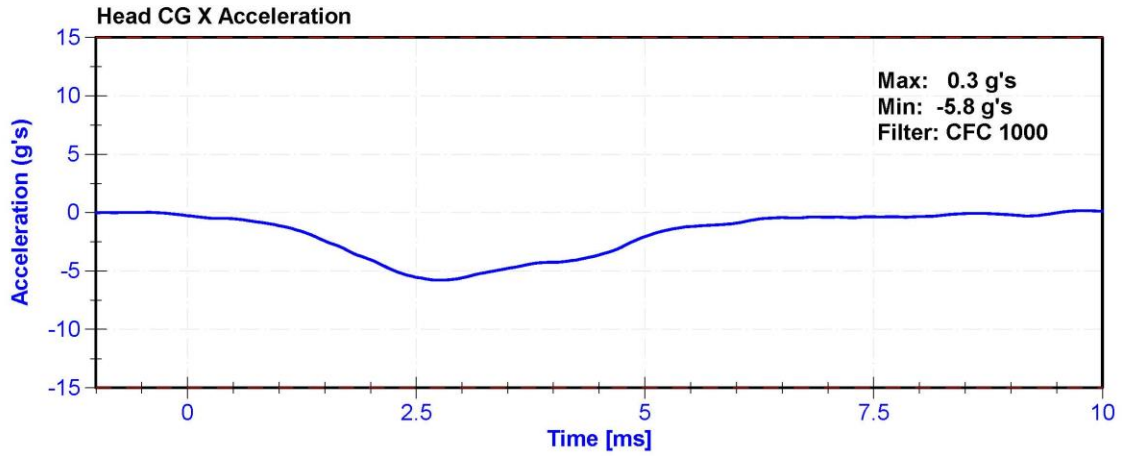


ATD Manufacturer	FTSS	Test Technician	S. Vacanti
ATD Serial Number	300	Laboratory Supervisor	K. Brogan



Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	20.9	Pass
Humidity	10	70	%	24	Pass
Velocity	5.51	5.63	m/s	5.549	Pass
Pendulum Impulse at 10ms	2.2	2.8	m/s	2.30	Pass
Pendulum Impulse at 15ms	3.3	4.1	m/s	3.38	Pass
Pendulum Impulse at 20ms	4.4	5.4	m/s	4.56	Pass
Pendulum Impulse at 25ms	5.4	6.1	m/s	5.46	Pass
Pendulum Impulse from 25 to 100ms	5.5	6.2	m/s	5.77	Pass
Neck Rotation	71	81	deg	78.8	Pass
Time at Maximum Rotation	50	70	ms	62.9	Pass
Moment about the OC	36	44	Nm	43.0	Pass
Moment Decay to 0 Nm	102	126	ms	119.9	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	ENDEVCO 7231CT	AC-C16503 Striker	2/5/2021	2/5/2022
Pendulum Potentiometer	Denton 78051-342	DS-184Pend	11/6/2020	11/6/2021
Condyle Potentiometer	Denton 78051-342	DS-185Pend	11/6/2020	11/6/2021
Upper Neck Load Cell	Denton 1716	17162019 FY	3/18/2020	3/18/2021

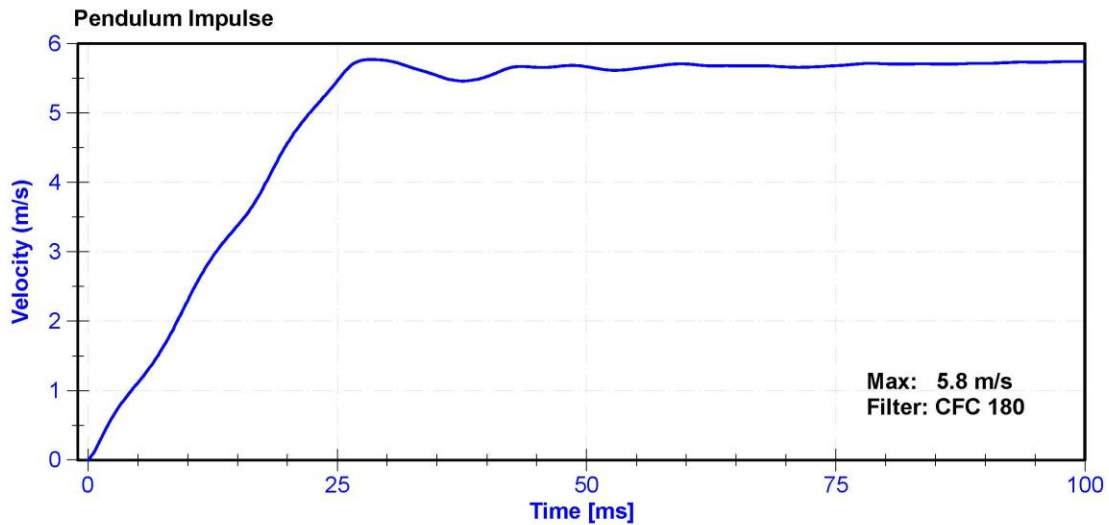

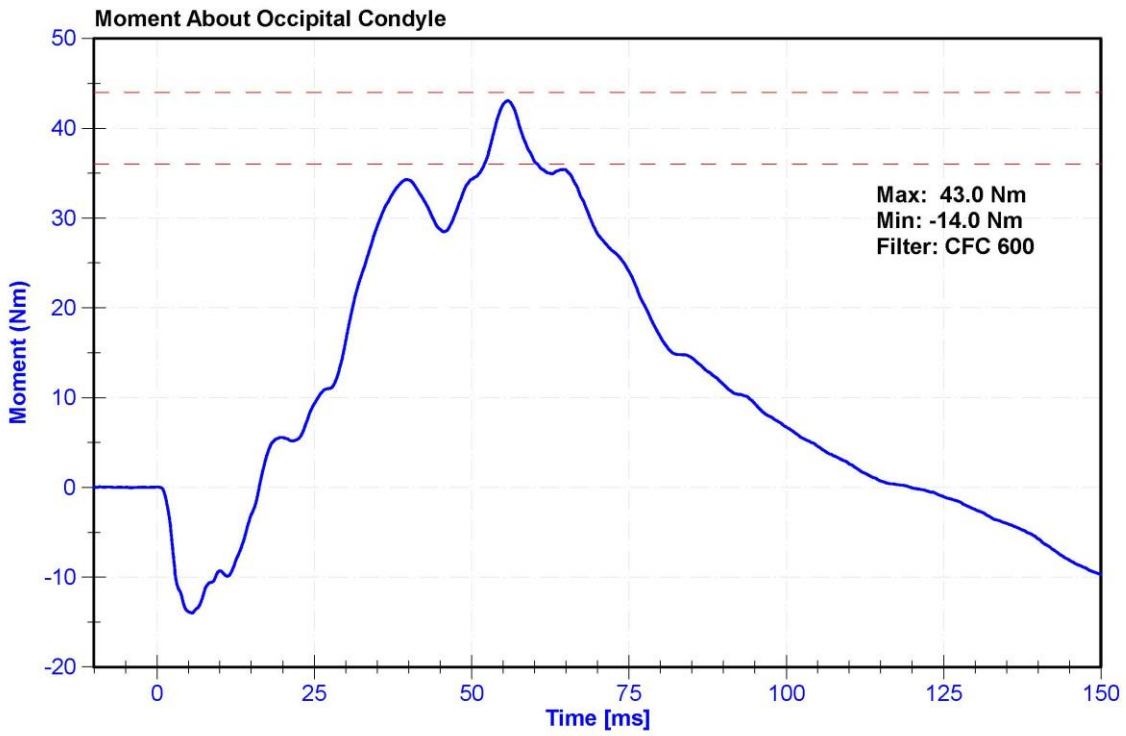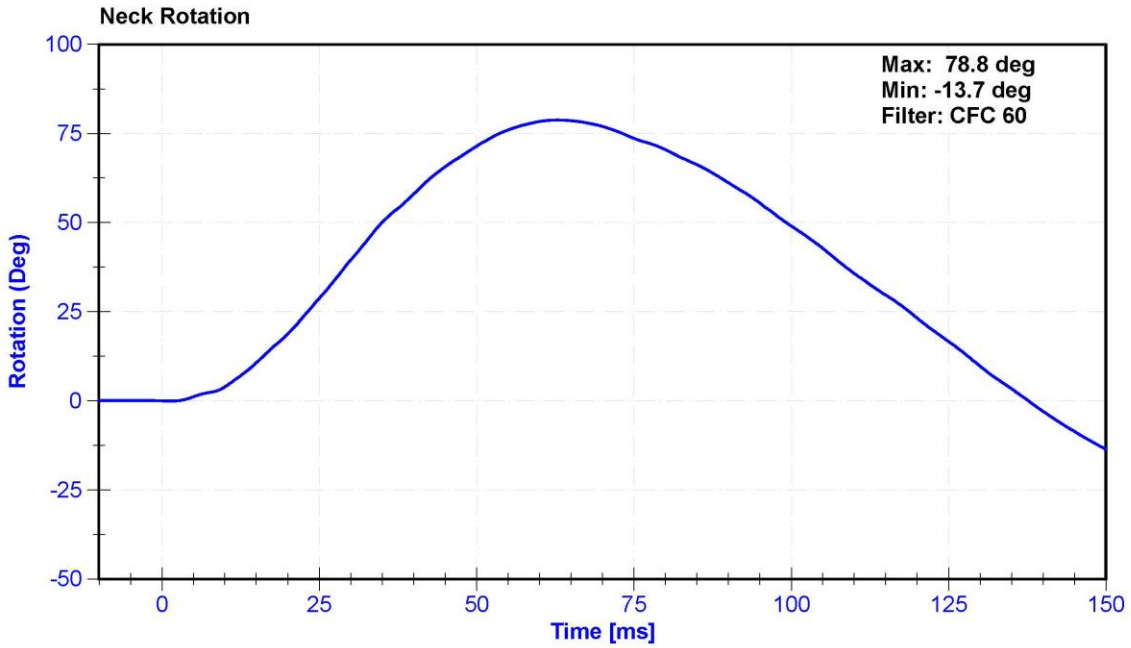


ATD Manufacturer	FTSS	Test Technician	D.Reinhard
ATD Serial Number	300	Laboratory Supervisor	K. Brogan



Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	20.8	Pass
Humidity	10	70	%	22	Pass
Velocity	4.2	4.4	m/s	4.27	Pass
Probe Acceleration	13	18	g's	16.7	Pass
Shoulder Deflection	28	37	mm	30.0	Pass
Lateral Upper Spine Acceleration	17	22	g's	20.1	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	MSI 64C-2000	A278994	12/3/2020	12/3/2021
Shoulder Potentiometer	Servo 08CT1-3725	DS-053 GFE	11/10/2020	5/11/2021
Upper Spine Y Accelerometer	ENDEVCO 7264CT	AC-P71281	11/9/2020	5/10/2021

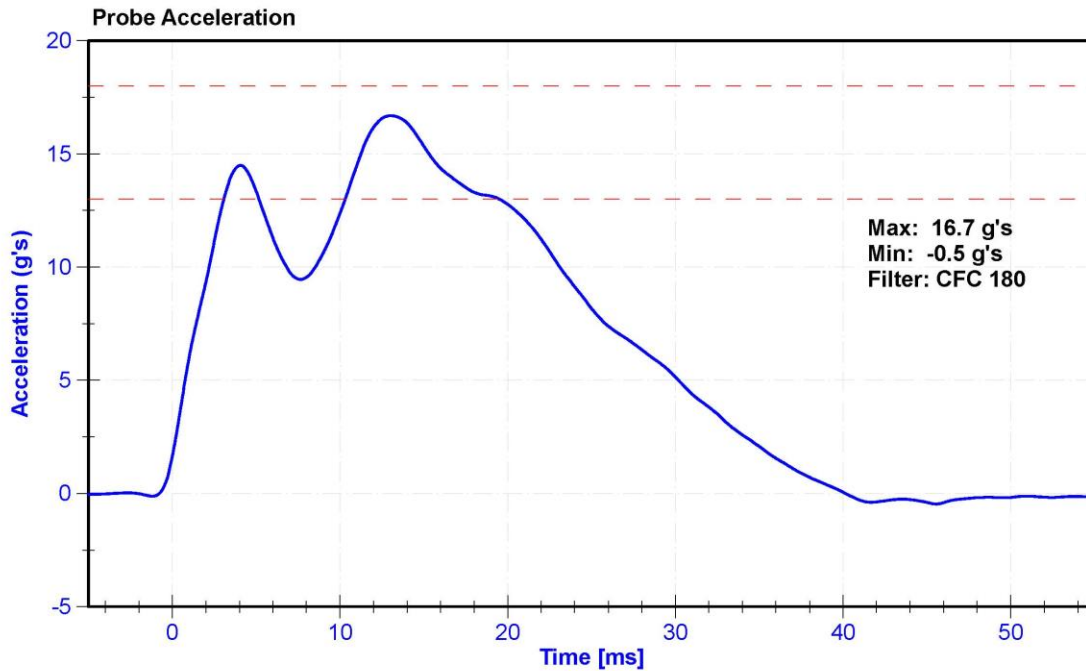

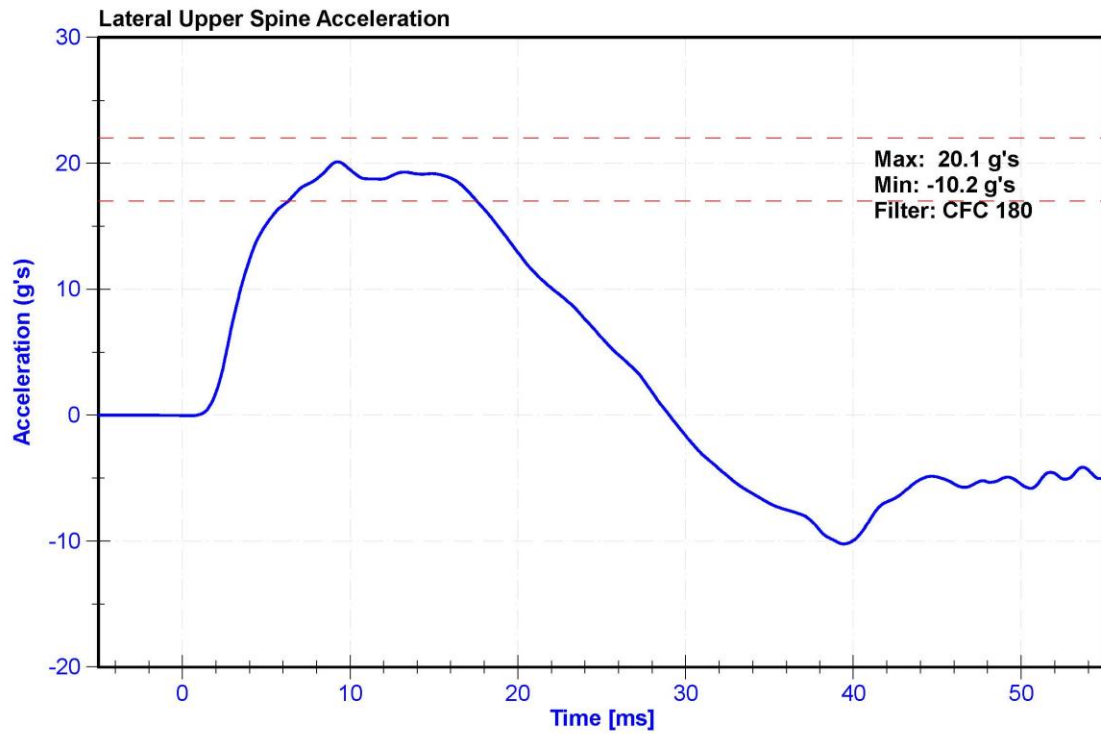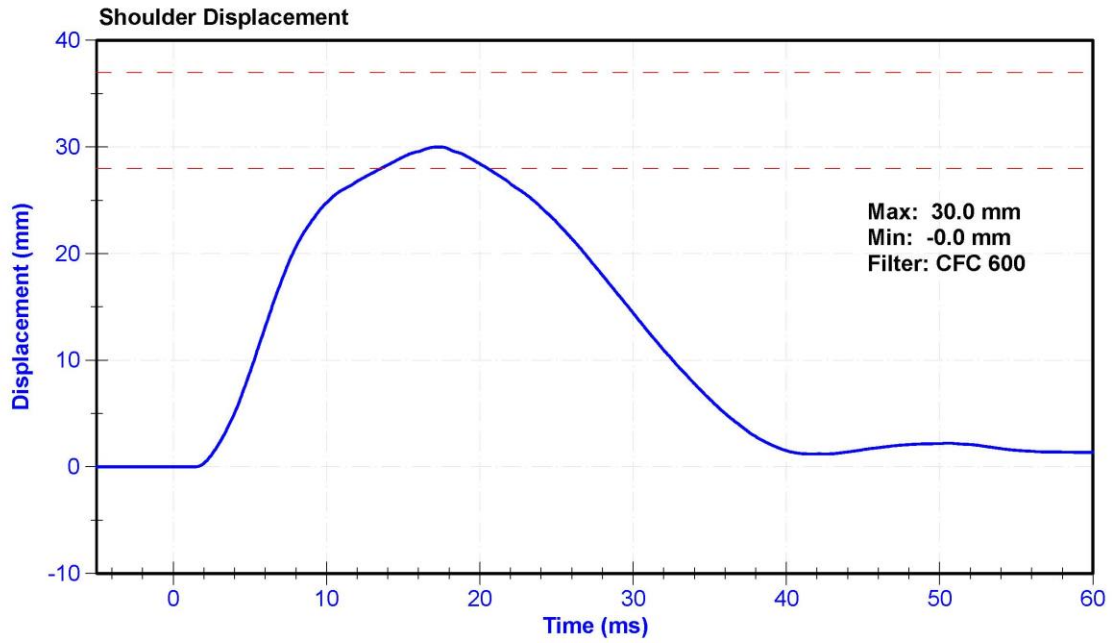


ATD Manufacturer	FTSS	Test Technician	D.Reinhard
ATD Serial Number	300	Laboratory Supervisor	K. Brogan





Results



Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21.2	Pass
Humidity	10	70	%	24.0	Pass
Velocity	6.6	6.8	m/s	6.66	Pass
Probe Acceleration after 5 ms	30	36	g's	35.7	Pass
Lateral Upper Spine Acceleration	34	43	g's	40.3	Pass
Lateral Lower Spine Acceleration	29	37	g's	33.2	Pass
Shoulder Deflection	31	40	mm	34.8	Pass
Upper Thorax Rib Deflection	25	32	mm	26.6	Pass
Mid Thorax Rib Deflection	30	36	mm	31.2	Pass
Lower Thorax Rib Deflection	32	38	mm	32.9	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	MSI 64C-2000	A278994	12/3/2020	12/3/2021
Upper Spine T1 Y Accelerometer	ENDEVCO 7264CT	AC-P71281	11/9/2020	5/10/2021
Upper Spine T12 Y Accelerometer	ENDEVCO 7264	AC-P64147	11/9/2020	5/10/2021
Shoulder Potentiometer	Servo 08CT1-3725	DS-053 GFE	11/10/2020	5/11/2021
Upper Thorax Rib Potentiometer	Servo 08CT1-3725	DS-451GFE	11/10/2020	5/11/2021
Middle Thorax Rib Potentiometer	Servo 08TC1-3745	DS-040GFE	11/10/2020	5/11/2021
Lower Thorax Rib Potentiometer	Servo 08TC1-3725	DS-1156GFE	11/9/2020	5/10/2021

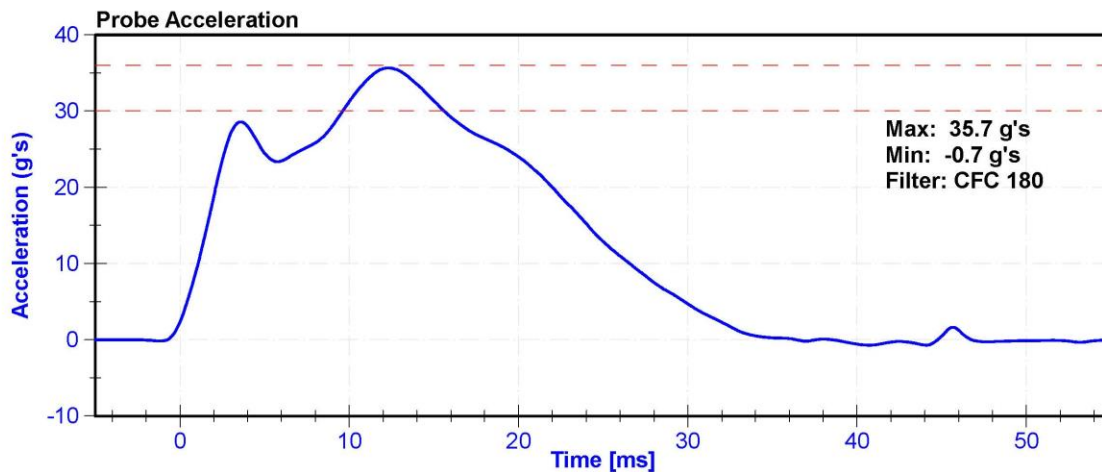

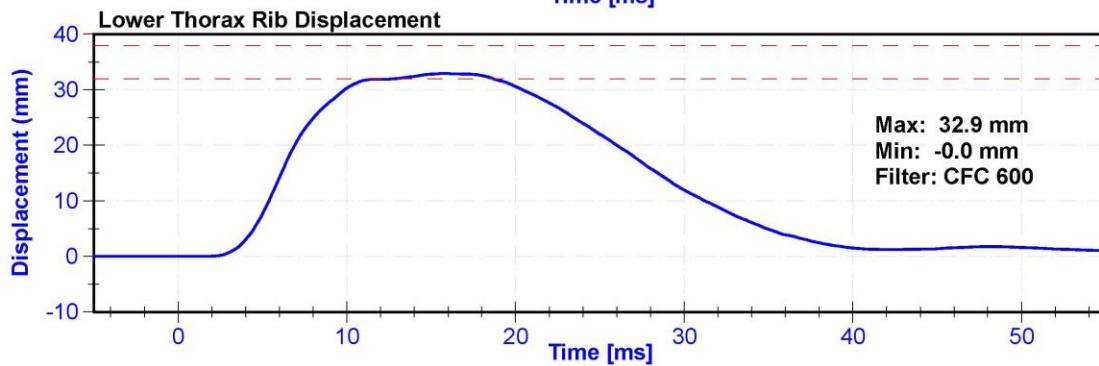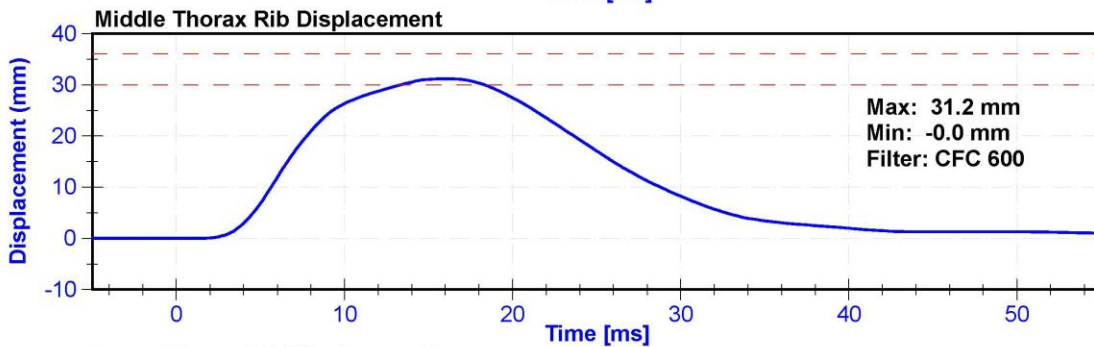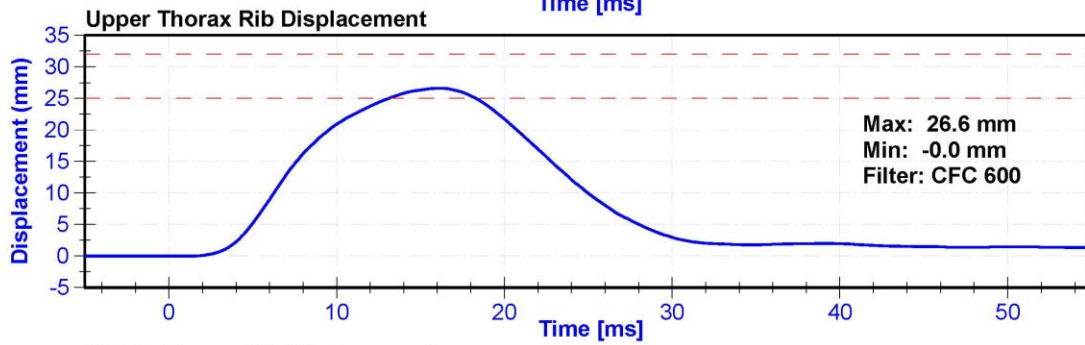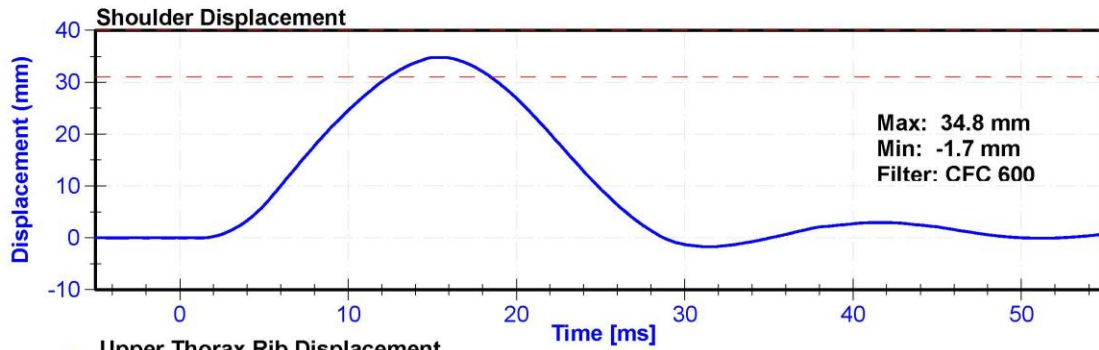

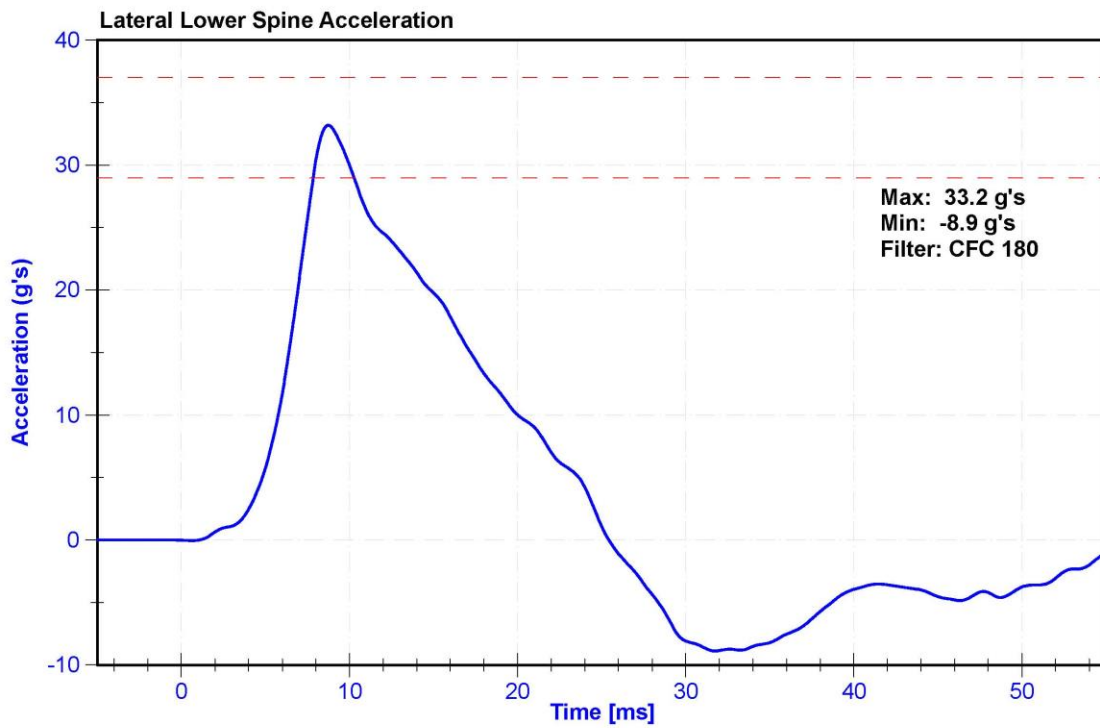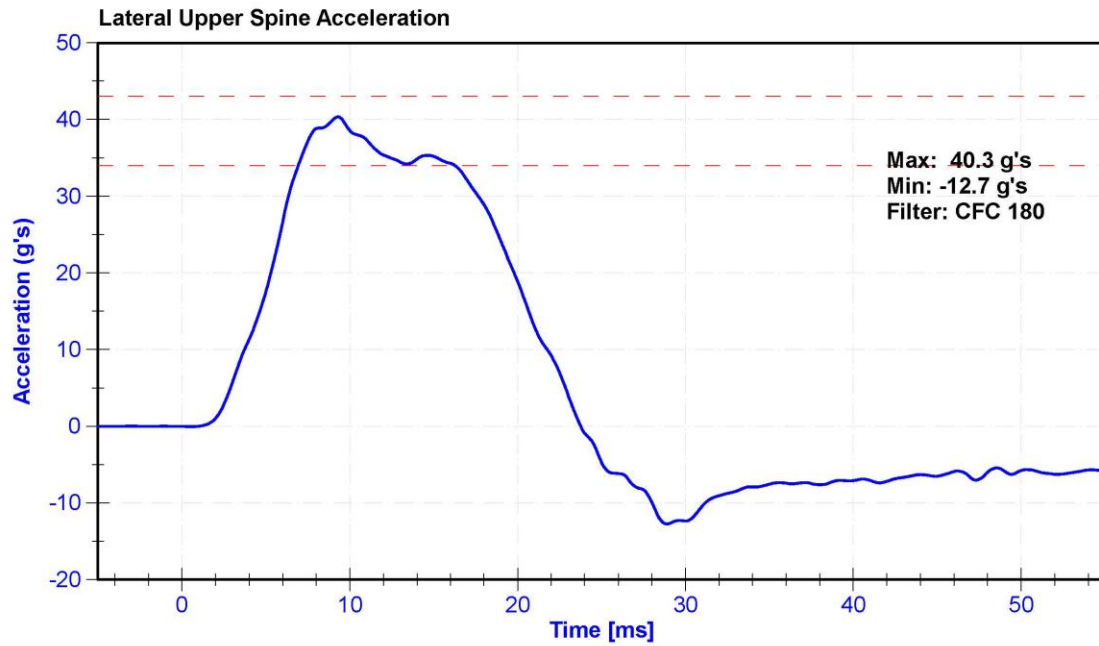


ATD Manufacturer	FTSS	Test Technician	D.Reinhard
ATD Serial Number	300	Laboratory Supervisor	K. Brogan




Results



Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	22.1	Pass
Humidity	10	70	%	29	Pass
Velocity	4.2	4.4	m/s	4.37	Pass
Probe Acceleration	14	18	g's	16.7	Pass
Lateral Upper Spine Acceleration	13	17	g's	16.8	Pass
Lateral Lower Spine Acceleration	7	11	g's	9.8	Pass
Upper Thorax Rib Deflection	32	40	mm	36.4	Pass
Middle Thorax Rib Deflection	39	45	mm	41.0	Pass
Lower Thorax Rib Deflection	35	43	mm	36.3	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	MSI 64C-2000	A278994	12/3/2020	12/3/2021
Upper Spine Y Accelerometer	ENDEVCO 7264CT	AC-P71281	11/9/2020	5/10/2021
Lower Spine Y Accelerometer	ENDEVCO 7264	AC-P64147	11/9/2020	5/10/2021
Upper Thorax Rib Potentiometer	Servo 08CT1-3725	DS-451GFE	11/10/2020	5/11/2021
Middle Thorax Rib Potentiometer	Servo 08TC1-3745	DS-040GFE	11/10/2020	5/11/2021
Lower Thorax Rib Potentiometer	Servo 08TC1-3725	DS-1156GFE	11/9/2020	5/10/2021

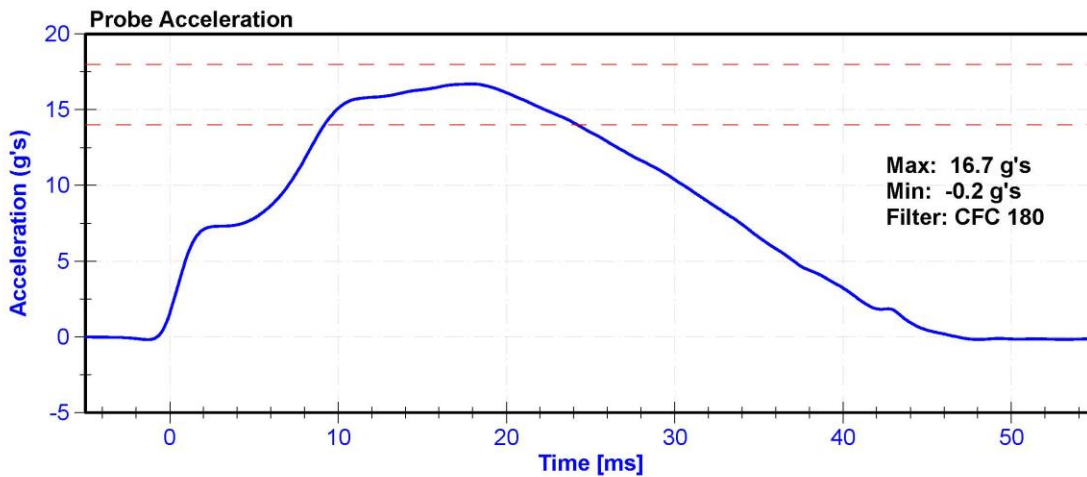

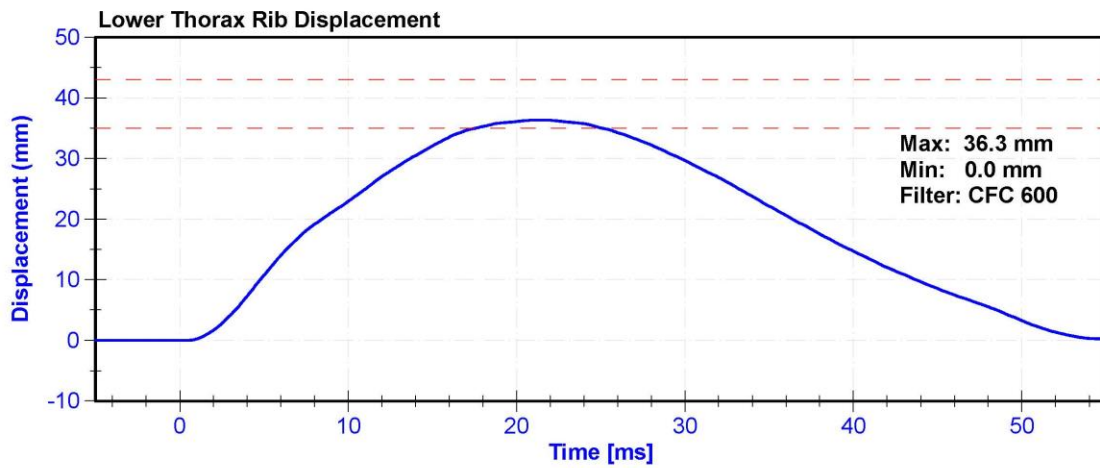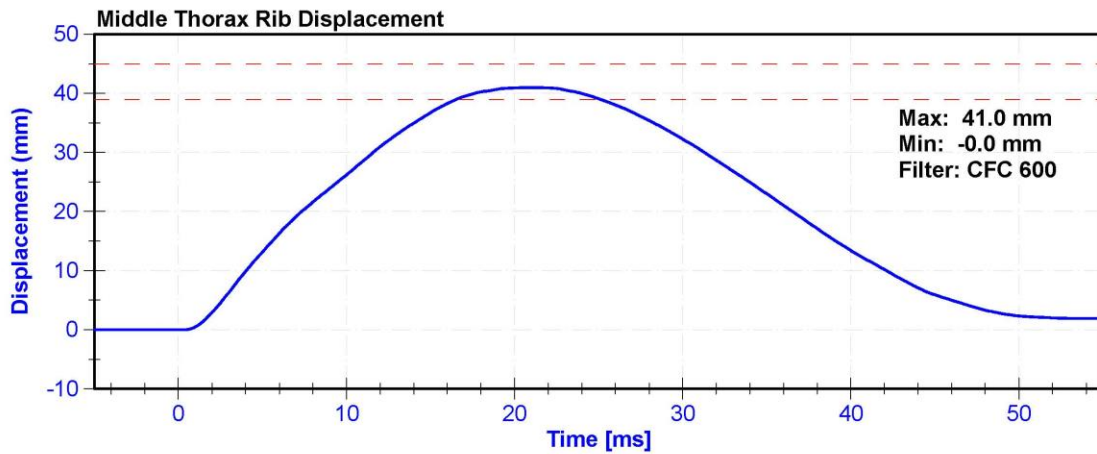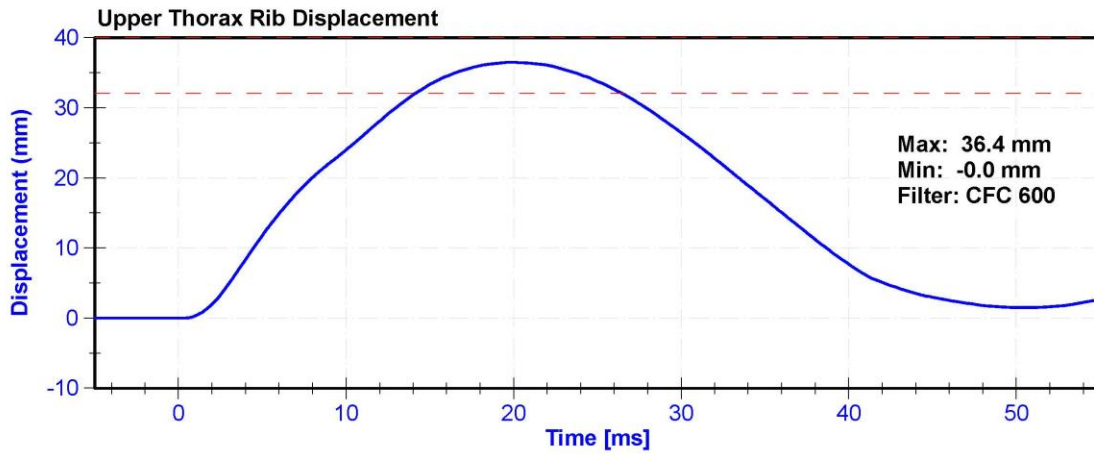

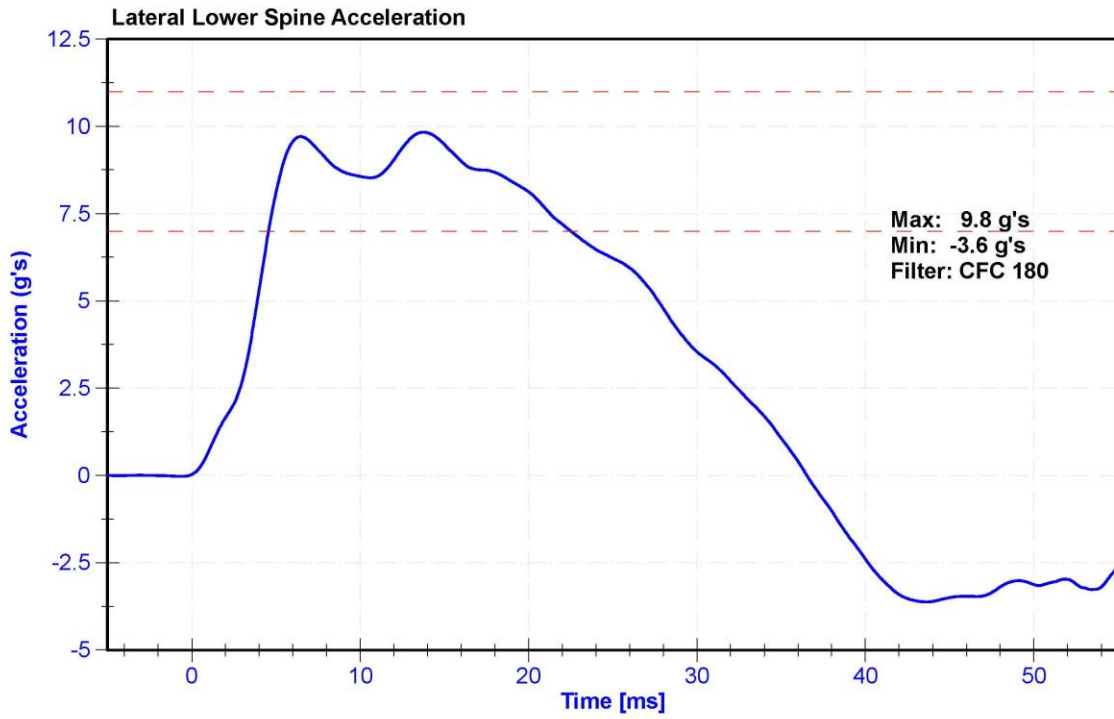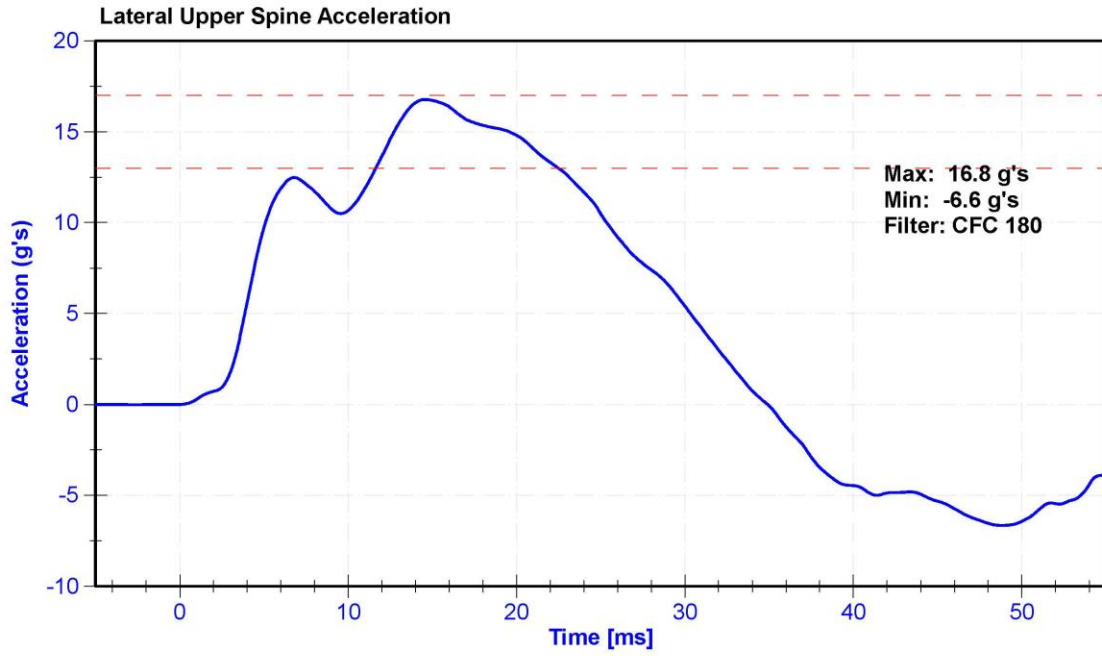


ATD Manufacturer	FTSS	Test Technician	D.Reinhard
ATD Serial Number	300	Laboratory Supervisor	K. Brogan



Results


Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	20.9	Pass
Humidity	10	70	%	29.0	Pass
Velocity	4.2	4.4	m/s	4.34	Pass
Probe Acceleration	12	16	g's	14.5	Pass
Lateral Lower Spine Acceleration	9	14	g's	11.3	Pass
Upper Abdomen Rib Deflection	36	47	mm	41.9	Pass
Lower Abdomen Rib Deflection	33	44	mm	41.1	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Probe Accelerometer	MSI 64C-2000	A278994	12/3/2020	12/3/2021
Lower Spine Y Accelerometer	ENDEVCO 7264	AC-P64147	11/9/2020	5/10/2021
Upper Abdomen Rib Potentiometer	Servo 08CT1-3725	DS-308GFE	11/10/2020	5/11/2021
Lower Abdomen Rib Potentiometer	Servo 08CT1-3725	DS-307GFE	11/10/2020	5/11/2021

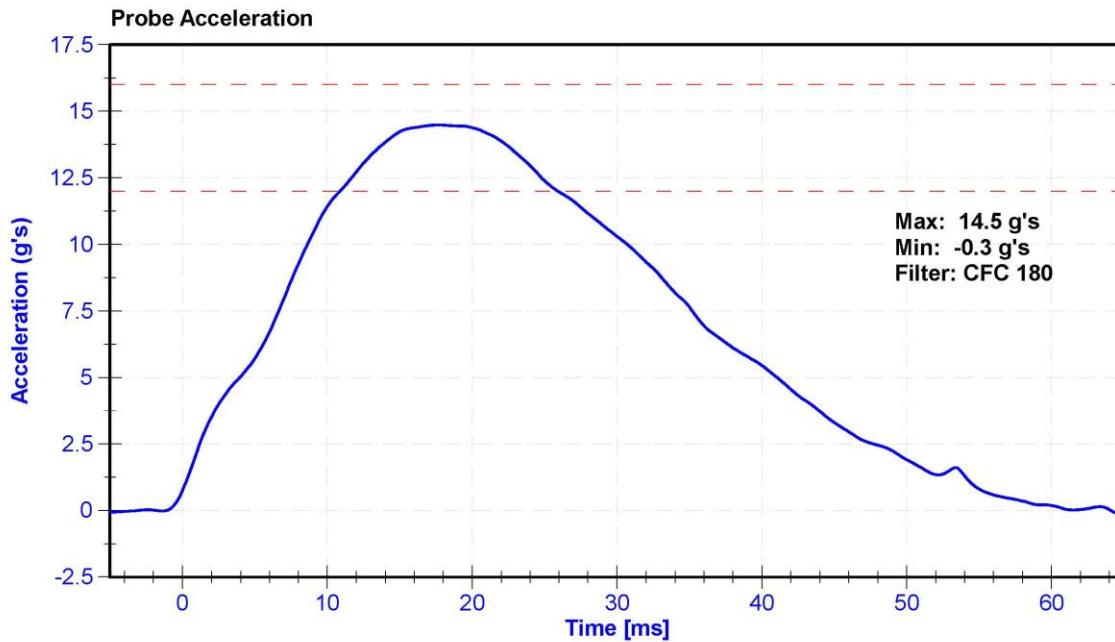

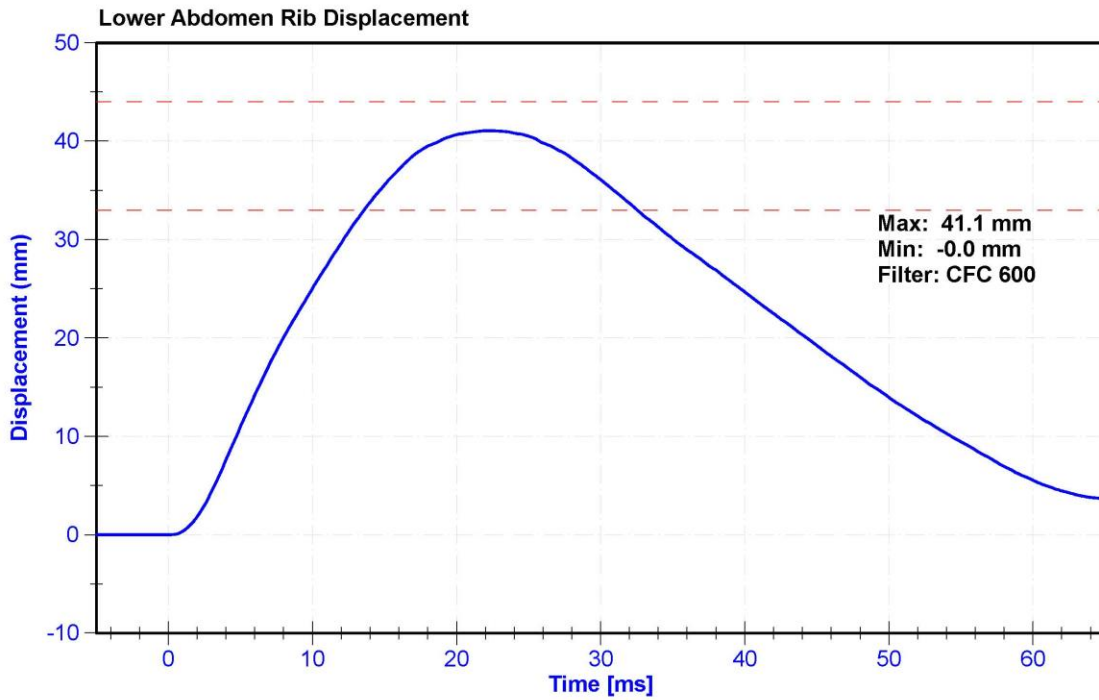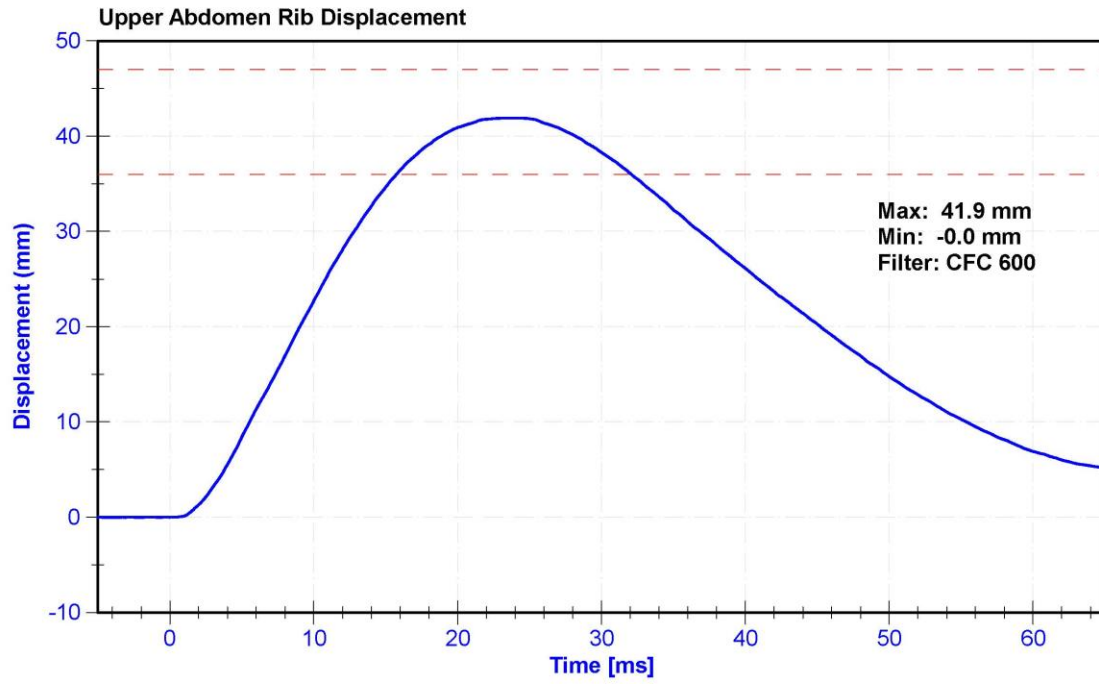

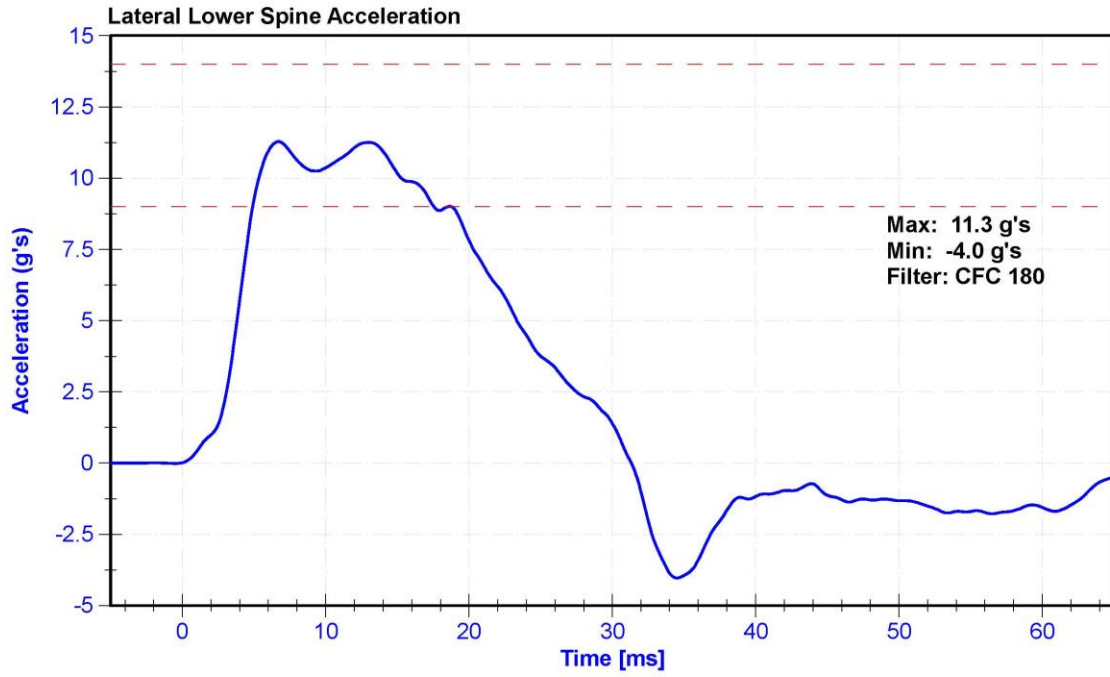


ATD Manufacturer	FTSS	Test Technician	D.Reinhard
ATD Serial Number	300	Laboratory Supervisor	K. Brogan



Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	20.9	Pass
Humidity	10	70	%	29	Pass
Velocity	6.6	6.8	m/s	6.66	Pass
Probe Acceleration	38	47	g's	44.9	Pass
Lateral Pelvis Acceleration after 6ms	34	42	g's	38.9	Pass
Acetabulum Force	3600	4300	N	3867.4	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	MSI 64C-2000	A278994	12/3/2020	12/3/2021
Pelvis Y Accelerometer	ENDEVCO 7264C	AC-P51731	11/9/2020	5/10/2021
Acetabulum Load Cell	Denton IF-520	LC-236Fy	3/18/2020	3/18/2021
Certification Plug	SACO	13919	5/20/2020	N/A
Crash Test Plug	SACO	13941	5/20/2020	N/A

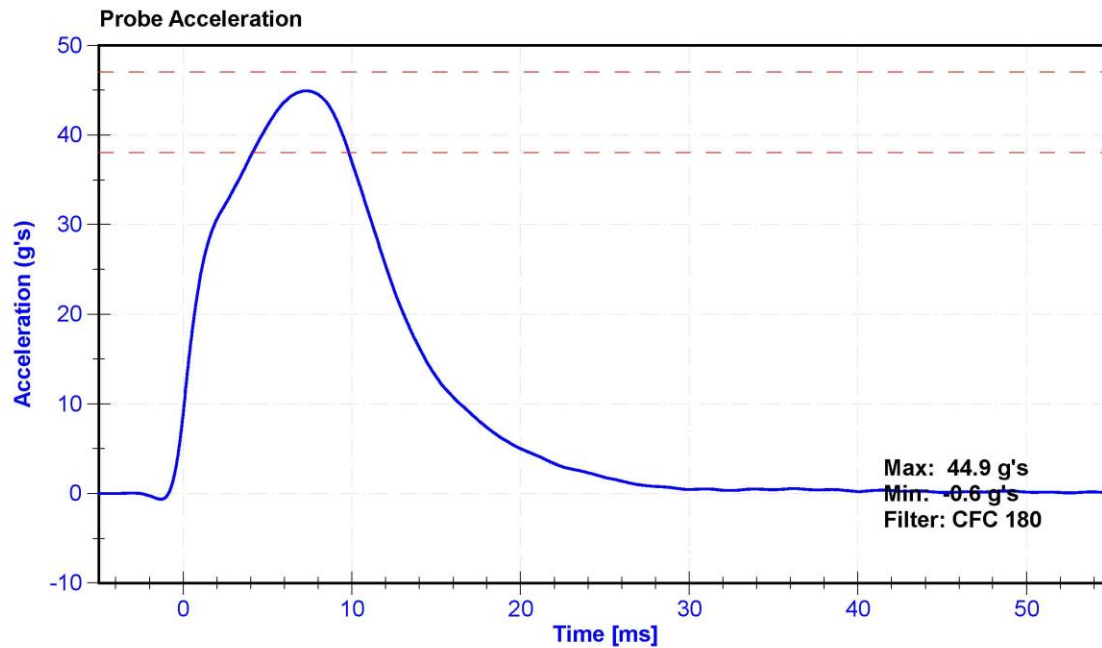

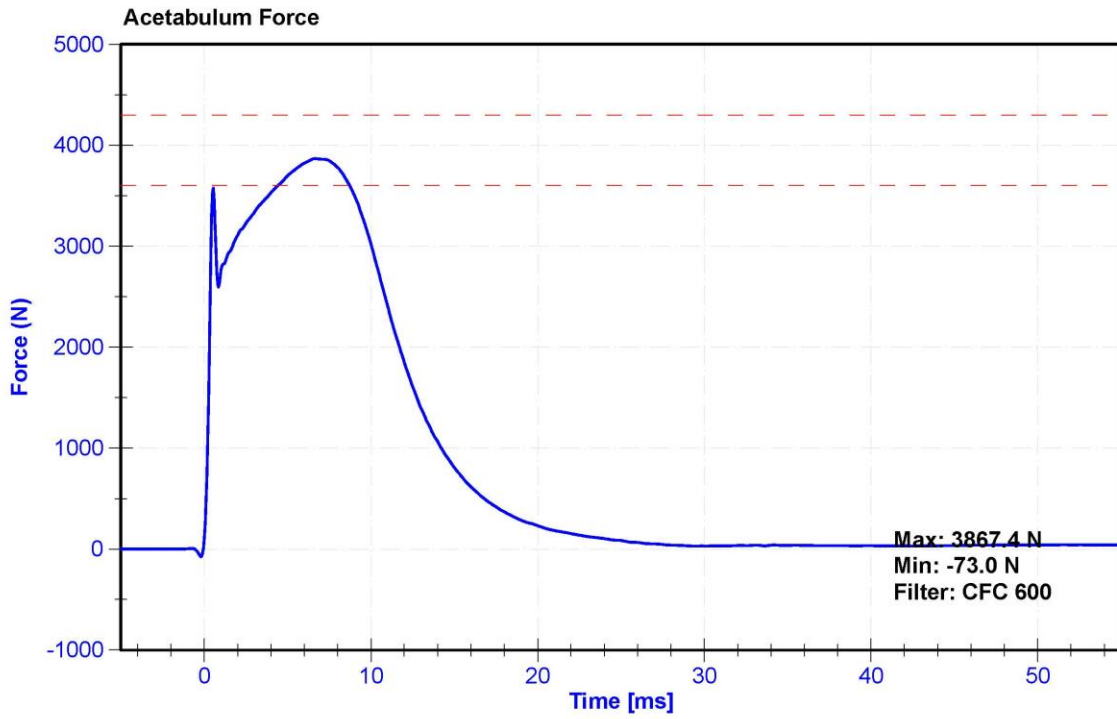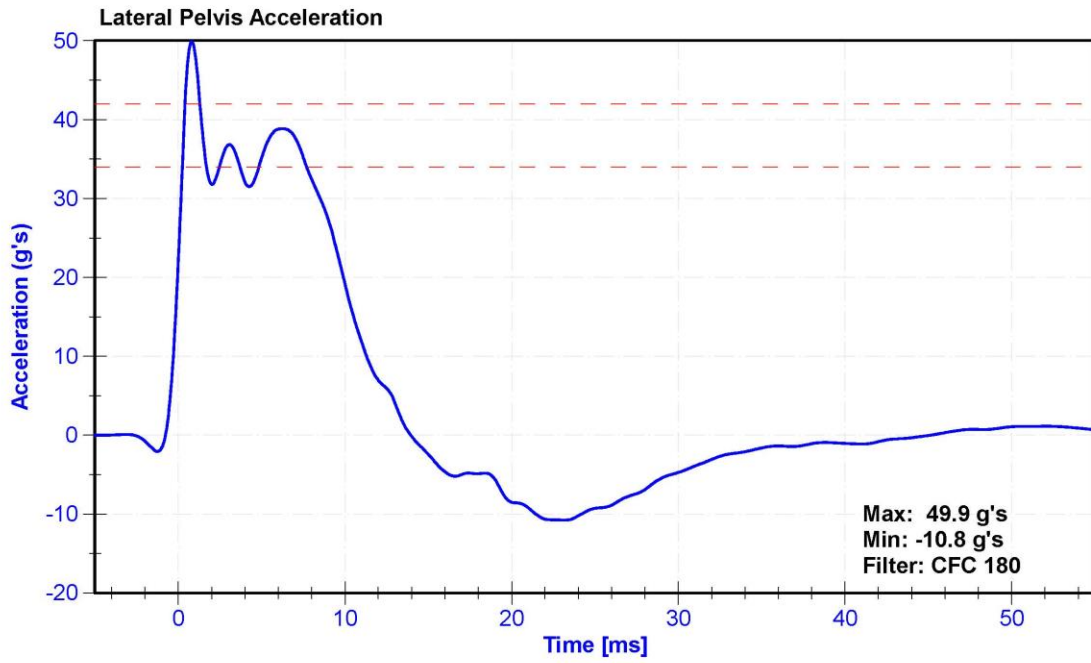




SID-Is Pelvis Plug Certification Test

Plug S/N 13941
 Test Number 13415
 Report Number 13460
 Test Date 5/20/2020 10:18:32 PM

300
 Crash
 3/10/21

Force (-N) vs Extension (-mm)

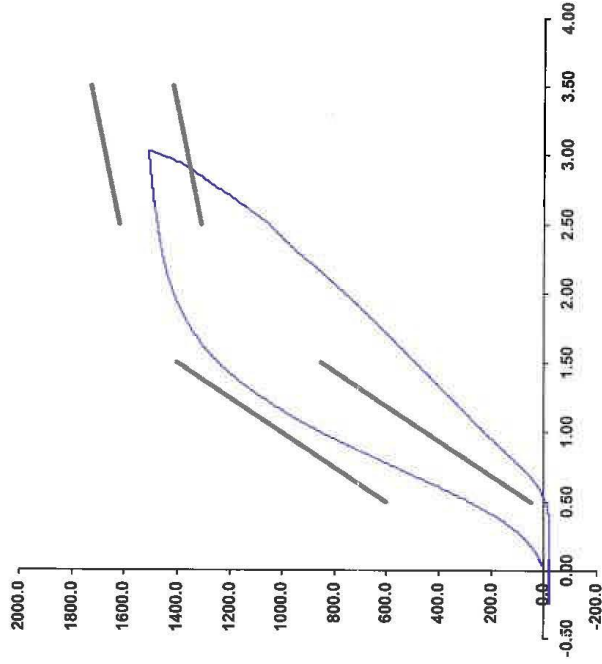

Test Results	Spec. Min	Spec. Max
Force @ 0.5 mm (N)	50.00	600.00
Force @ 1.5 mm (N)	850.00	1,400.00
Force @ 2.5 mm (N)	1,306.00	1,618.00
Force @ 3.0 mm (N)	1,361.00	1,673.00

Testing Machine STM-20 5965542
 Load Cell S/N (F1360947), Units (LBS) 1000
 Crosshead Speed (mm / min) or Rate 12.7
 Extension or Position Measured by XHD_100 (XHD100)

Notes:

Operator _____
 Part Number 180-4450

Template No 107 20-May-20
 SACO Research

By: DC Date: 5/20/2020

SACO Research 41735 Elm St, #401 Murrieta, CA 92562 Tel 310-694-2082 FAX



SID-Its Pelvis Plug Certification Test

Plug S/N 13919


Test Number 13393

Report Number 13438

Test Date 5/20/2020 9:38:18 PM

300 Cert
3/10/21

Force (-N) vs Extension (-mm)

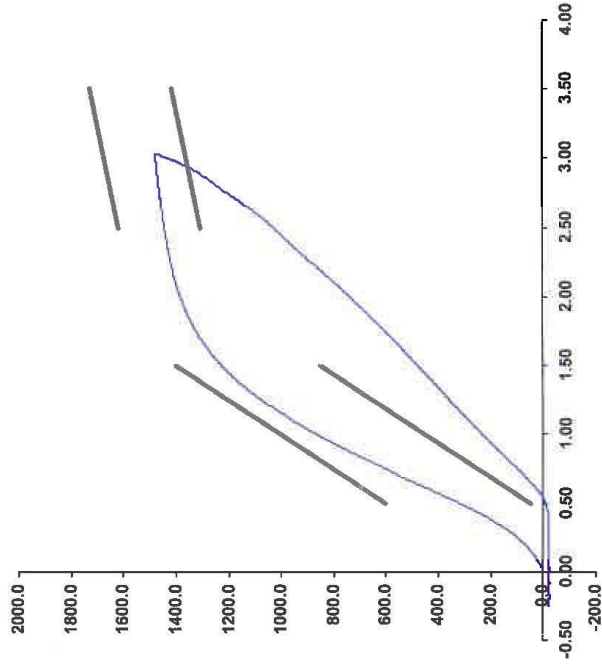

Test Results	Spec.Min	Spec.Max
Force @ 0.5 mm (N)	50.00	600.00
Force @ 1.5 mm (N)	850.00	1,400.00
Force @ 2.5 mm (N)	1,306.00	1,618.00
Force @ 3.0 mm (N)	1,361.00	1,673.00

Testing Machine STM-20 5965542
 Load Cell S/N (F1360947), Units (LBS) 1000
 Preload Value (-N) 22.24
 Crosshead Speed (mm / min) or Rate 12.7
 Extension or Position Measured by XHD_100 (XHD100)

Notes:

Operator 13916
 Part Number 180-4450

Template No 107 20-May-20
 SACO Research

By: *DC* Date: 5/20/2020
 SACO Research 41735 Elm St, #401 Murrieta, CA 92562 Tel 310-694-2082 FAX




SID-Ils Pelvis Plug Certification Test

Plug S/N 13782
 Test Number 12971
 Report Number 13015
 Test Date 4/7/2020 7:14:34 AM

300
 310a1
 Non Impact

Force (-N) vs Extension (-mm)

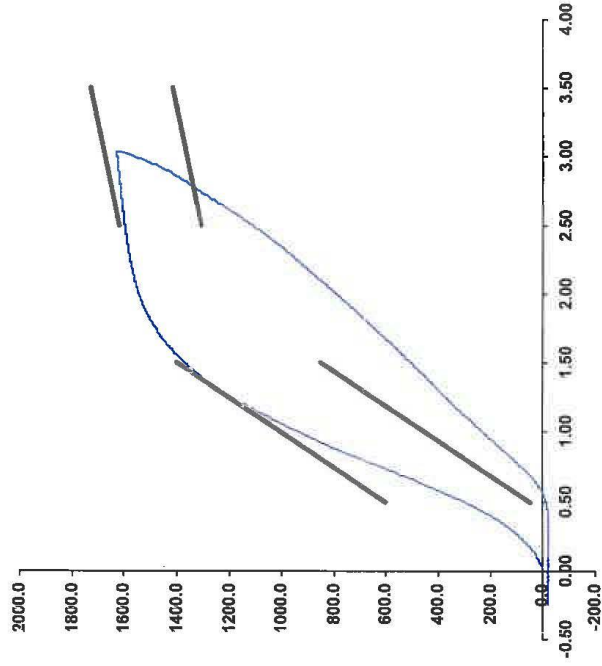

Test Results	Spec. Min	Spec. Max
Force @ 0.5 mm (N)	50.00	600.00
Force @ 1.5 mm (N)	850.00	1,400.00
Force @ 2.5 mm (N)	1,306.00	1,618.00
Force @ 3.0 mm (N)	1,361.00	1,673.00

Testing Machine STM-20 5965542
 Load Cell S/N (F1360947), Units (LBS) 1000
 Preload Value (-N) 22.24
 Crosshead Speed (mm / min) or Rate 12.7
 Extension or Position Measured by XHD_100 (XHD100)

Notes:

Operator _____
 Part Number 180-4450

Template No 107 07-Apr-20
 SACO Research

By: *DC* Date: 4/7/2020
 SACO Research 41735 Elm St, #401 Murrieta, CA 92562 Tel 310-694-2082 FAX


ATD Manufacturer	FTSS	Test Technician	K. Brogan
ATD Serial Number	300	Laboratory Supervisor	D.Reinhard

Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	20.9	Pass
Humidity	10	70	%	29.0	Pass
Velocity	4.2	4.4	m/s	4.23	Pass
Probe Acceleration	36	45	g's	44.9	Pass
Lateral Pelvis Acceleration	28	39	g's	35.1	Pass
Iliac Force	4100	5100	N	4847.0	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	MSI 64C-2000	A278994	12/3/2020	12/3/2021
Pelvis Y Accelerometer	ENDEVCO 7264C	AC-P51731	11/9/2020	5/10/2021
Iliac Load Cell	DENTON 3228J	LC-279Fy	11/23/2020	11/23/2021

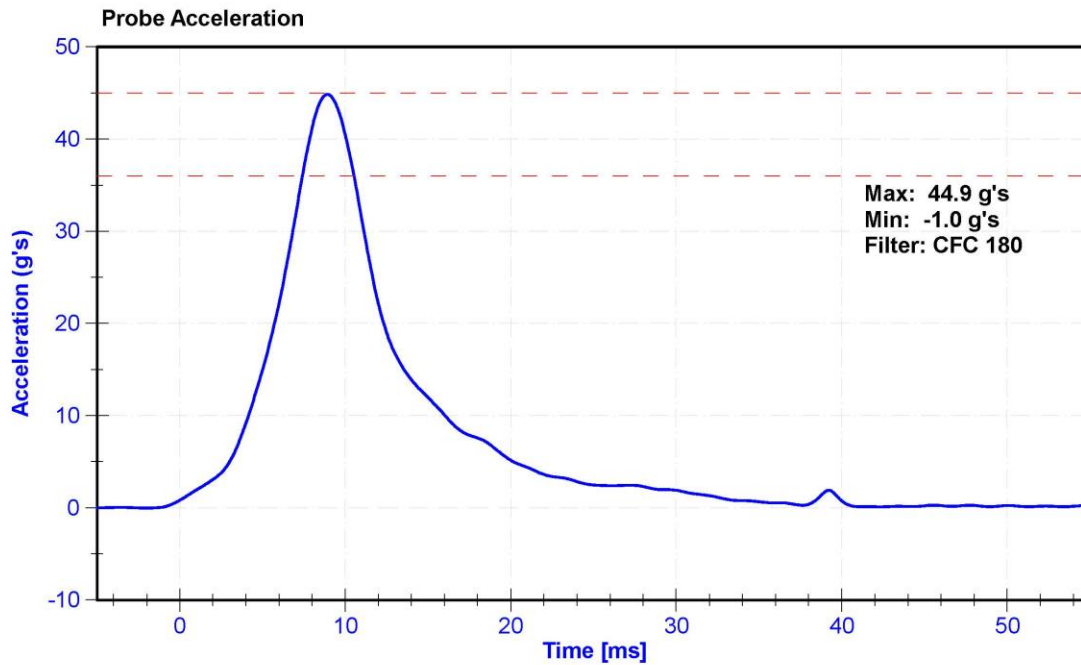

CALIBRATION TEST RESULTS

POST-TEST

EUROSID 2 (ES-2RE) MALE – DRIVER ATD

SERIAL NO: F033

(CONFIGURED FOR LEFT SIDE IMPACT)




External Measurements - EuroSID-2re


Technician: K. Brogan

Date: 3/16/2021

Dummy Serial Number: F033

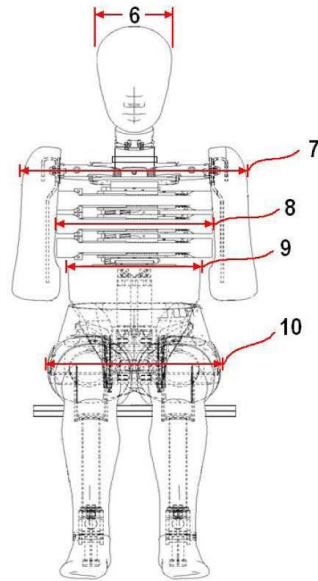

FRONT VIEW

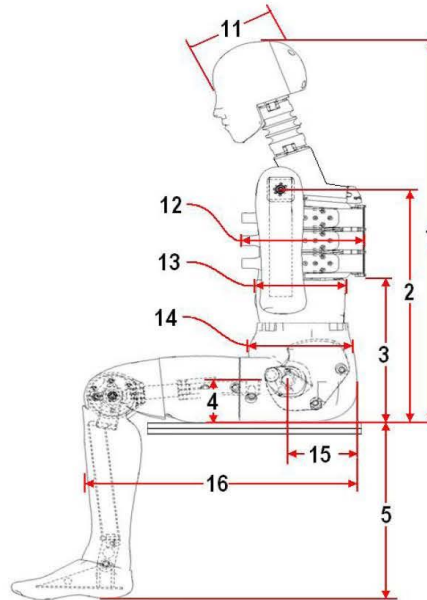

SIDE VIEW

Dim. No.	Description	Specification (mm)		Result (mm)	Pass/Fail
1	Sitting Height	900	918	912	Pass
2	Seat to Shoulder Joint	558	572	569	Pass
3	Seat to Lower Face of Thoracic Spine Box	346	356	353	Pass
4	Seat to Hip Joint (center of bolt)	97	103	98	Pass
5	Sole to Seat, Sitting	333	451	426	Pass
6	Head Width	152	158	154	Pass
7	Shoulder/Arm Width	461	479	472	Pass
8	Thorax Width	322	332	329	Pass
9	Abdomen Width	273	287	285	Pass
10	Pelvis Lap Width	359	373	367	Pass
11	Head Depth	196	206	201	Pass
12	Thorax Depth	262	272	269	Pass
13	Abdomen Depth	194	204	201	Pass
14	Pelvis Depth	235	245	239	Pass
15	Back of Buttocks to Hip Joint (center of bolt)	150	160	155	Pass
16	Back of Buttocks to Front Knee	597	615	609	Pass


ATD Manufacturer	FTSS	Test Technician	E. Helenbrook
ATD Serial Number	F033	Laboratory Supervisor	K. Brogan




Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21.0	Pass
Humidity	10	70	%	28.0	Pass
Resultant Acceleration	125	155	g's	147.9	Pass
Oscillation	0	15	%	2.27	Pass
Fore-Aft Acceleration	-15	15	g's	-5.0	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
X Accelerometer	ENDEVCO 7264CT	AC-P63861	11/24/2020	5/25/2021
Y Accelerometer	ENDEVCO 7264CT	AC-P49216	11/24/2020	5/25/2021
Z Accelerometer	ENDEVCO 7264	AC-P51303	11/24/2020	5/25/2021

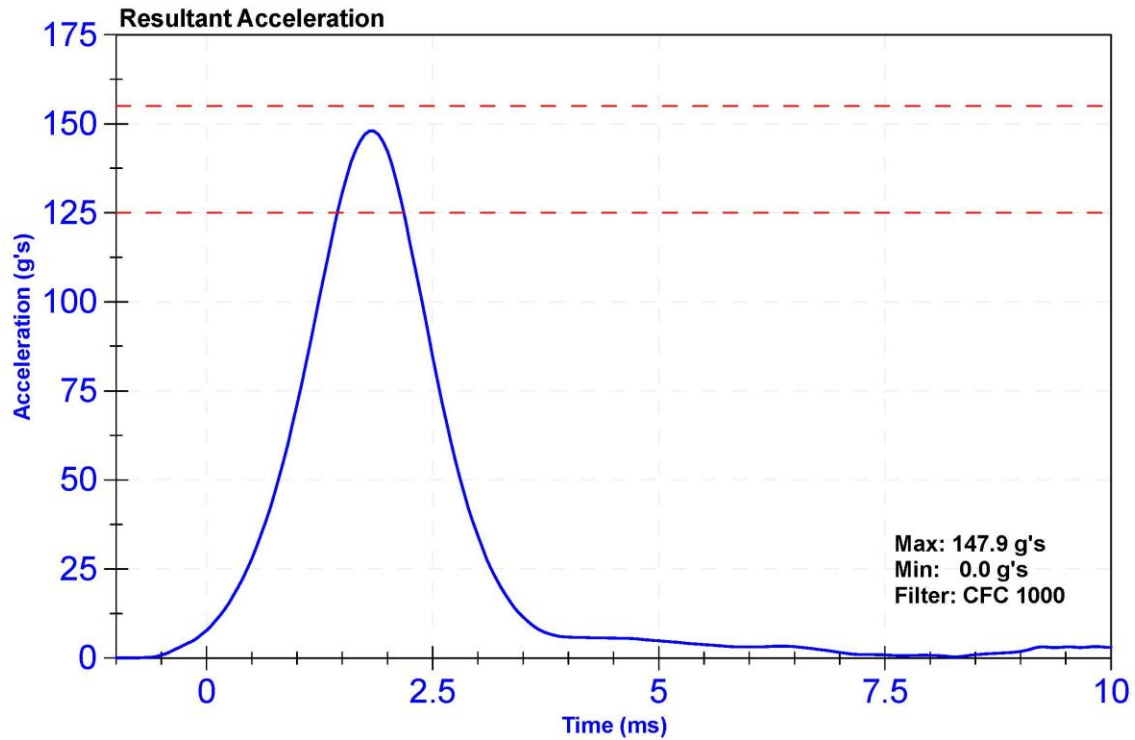

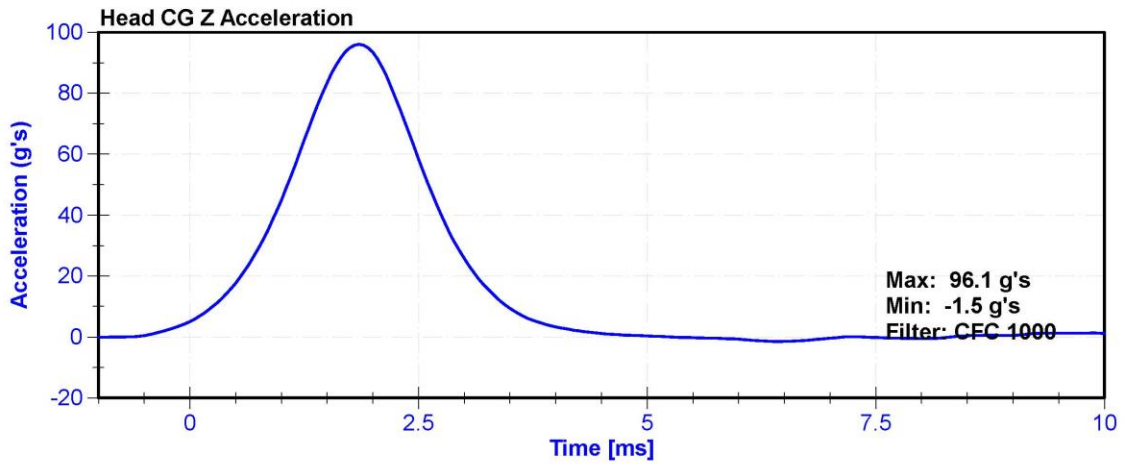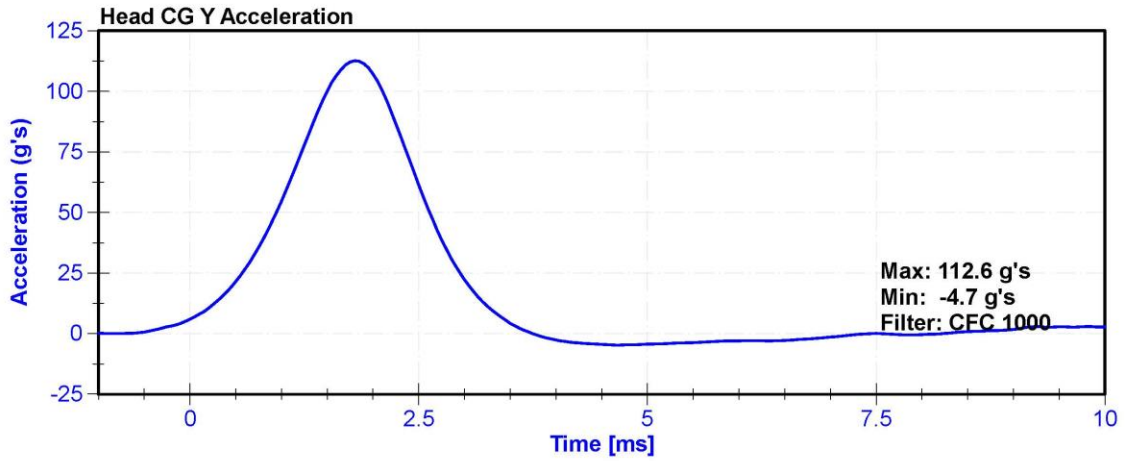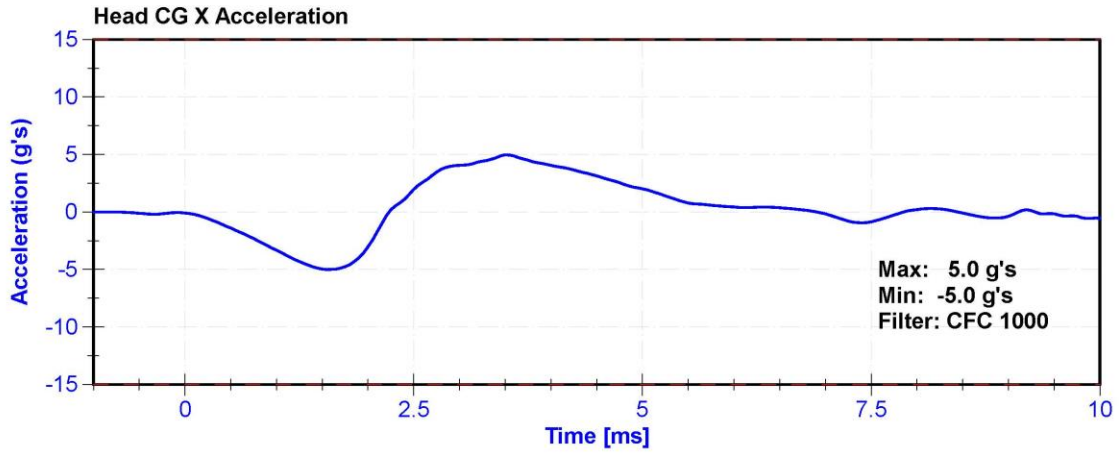


ATD Manufacturer	FTSS	Test Technician	E. Helenbrook
ATD Serial Number	F033	Laboratory Supervisor	K. Brogan




Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21.3	Pass
Humidity	10	70	%	28	Pass
Velocity	3.3	3.5	m/s	3.38	Pass
Lateral Neck Rotation	49	59	deg	52.7	Pass
Time at Maximum Rotation	54	66	ms	54.5	Pass
Time of Rotation Decay from Maximum	53	88	ms	62.7	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	ENDEVCO 7231C	AC-C16503	2/5/2021	2/5/2022
Front Pendulum Potentiometer	SP22G	DS-094	8/18/2020	8/18/2021
Headform Potentiometer	SP22G	DS-095	8/18/2020	8/18/2021

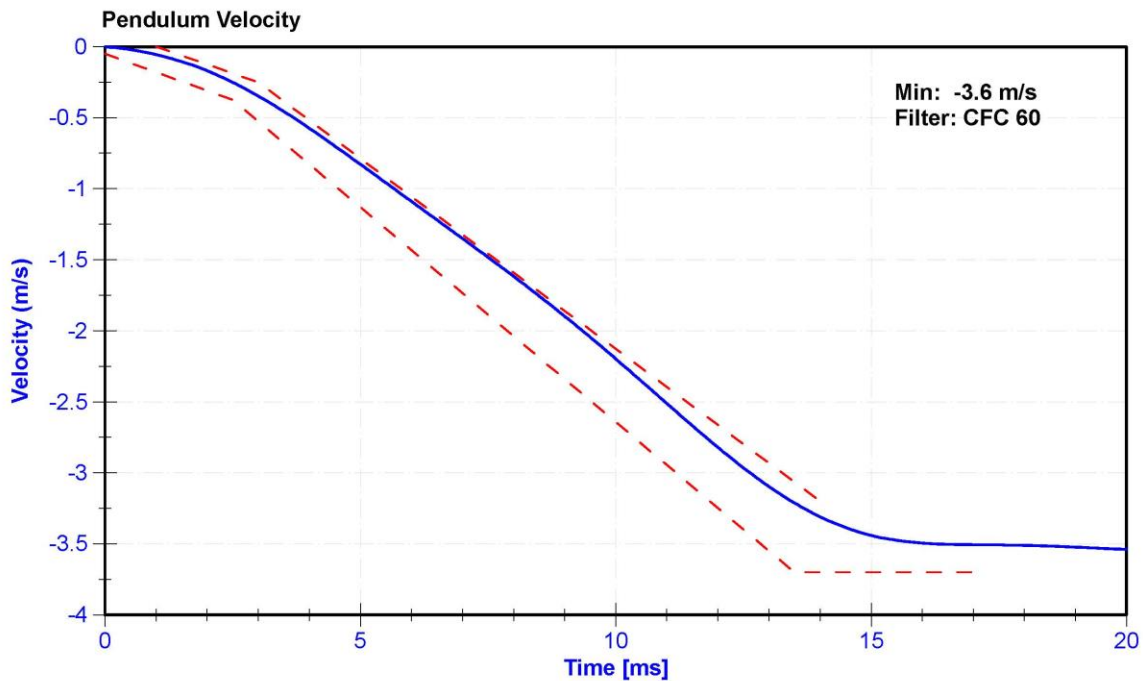

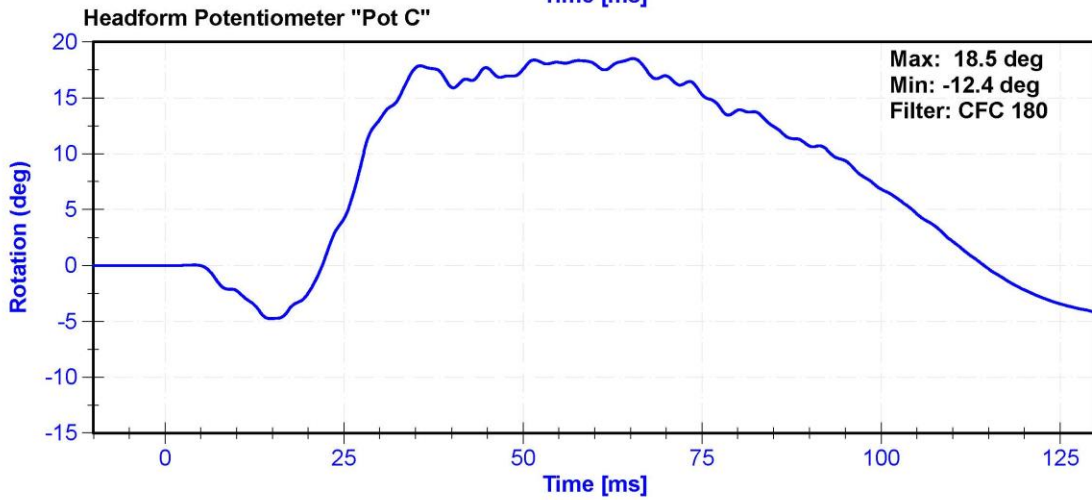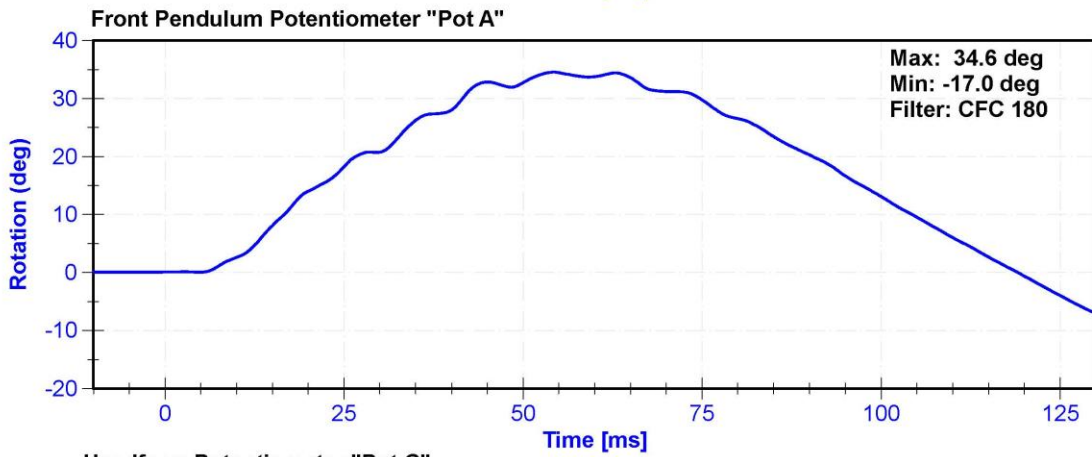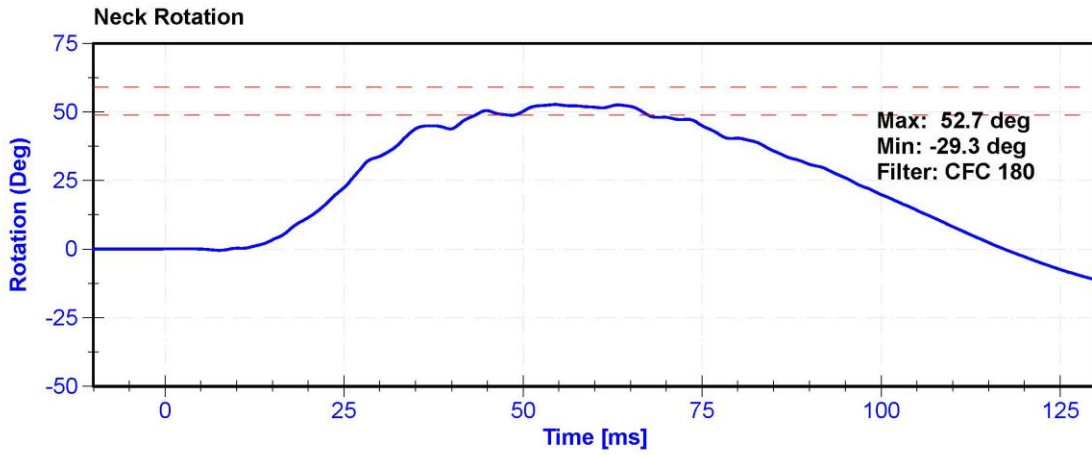


ATD Manufacturer	FTSS	Test Technician	S. Vacanti
ATD Serial Number	F033	Laboratory Supervisor	K. Brogan

Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	20.9	Pass
Humidity	10	70	%	28.0	Pass
Velocity	4.2	4.4	m/s	4.34	Pass
Probe Acceleration	7.5	10.5	g's	9.83	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Probe Accelerometer	ENDEVCO 7264C	T25885	2/2/2021	2/2/2022

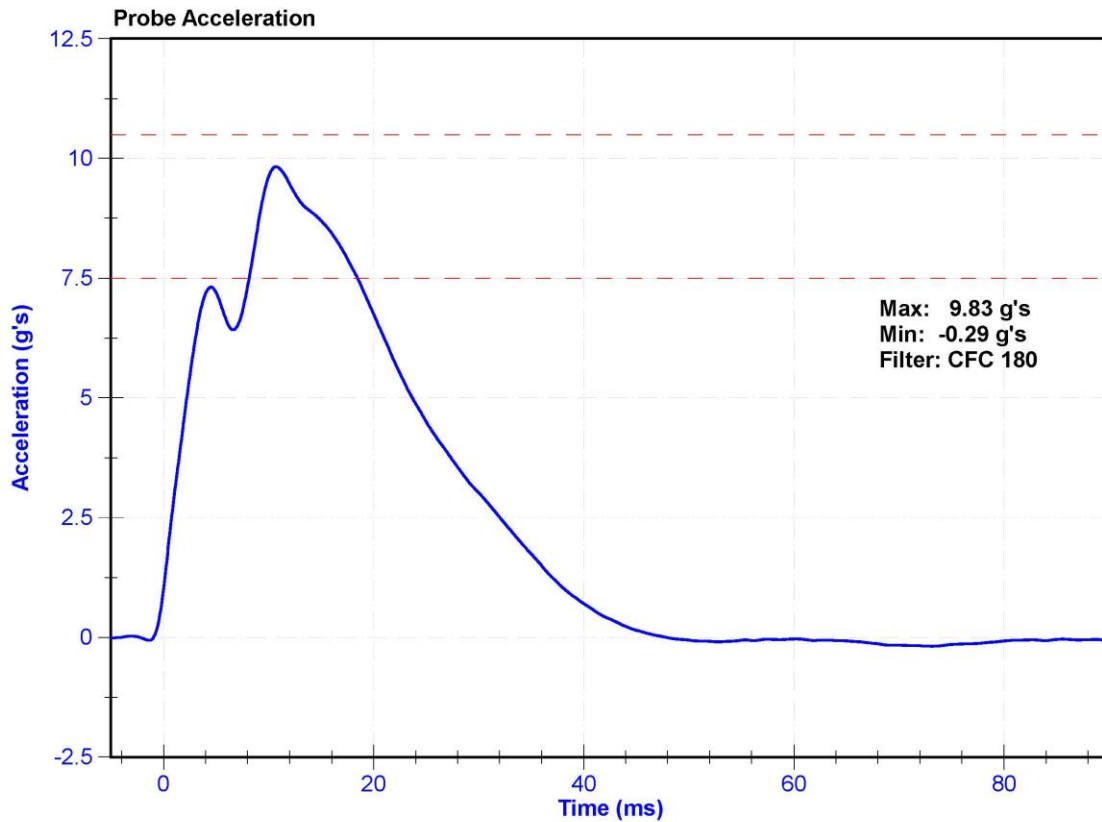


ATD Manufacturer	FTSS	Test Technician	S. Vacanti
ATD Serial Number	F033	Laboratory Supervisor	K. Brogan

Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	20.9	Pass
Humidity	10	70	%	28.0	Pass
Rib Displacement	36	40	mm	37.4	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Rib Potentiometer	Honeywell MLT-38000203	DS-179GFE	11/25/2020	5/26/2021

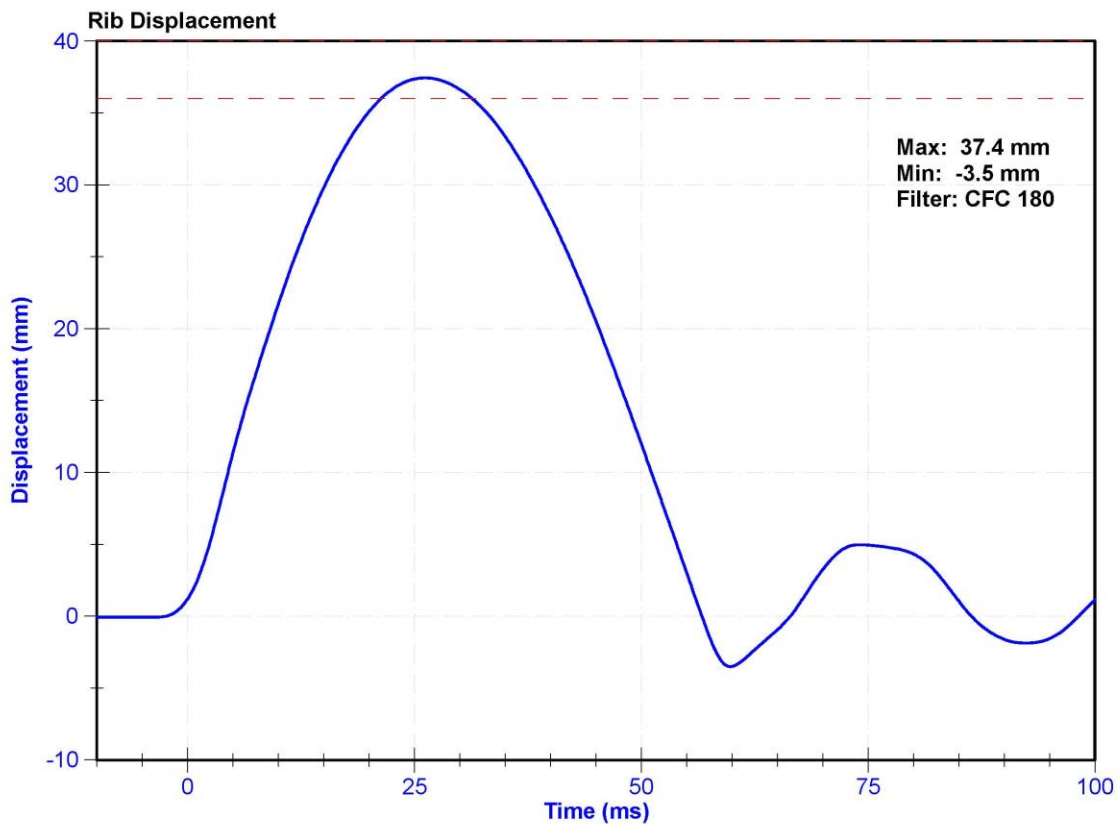


ATD Manufacturer	FTSS	Test Technician	S. Vacanti
ATD Serial Number	F033	Laboratory Supervisor	K. Brogan

Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	20.9	Pass
Humidity	10	70	%	29.0	Pass
Rib Displacement	46	51	mm	48.5	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Rib Potentiometer	Honeywell MLT-38000203	DS-179GFE	11/25/2020	5/26/2021

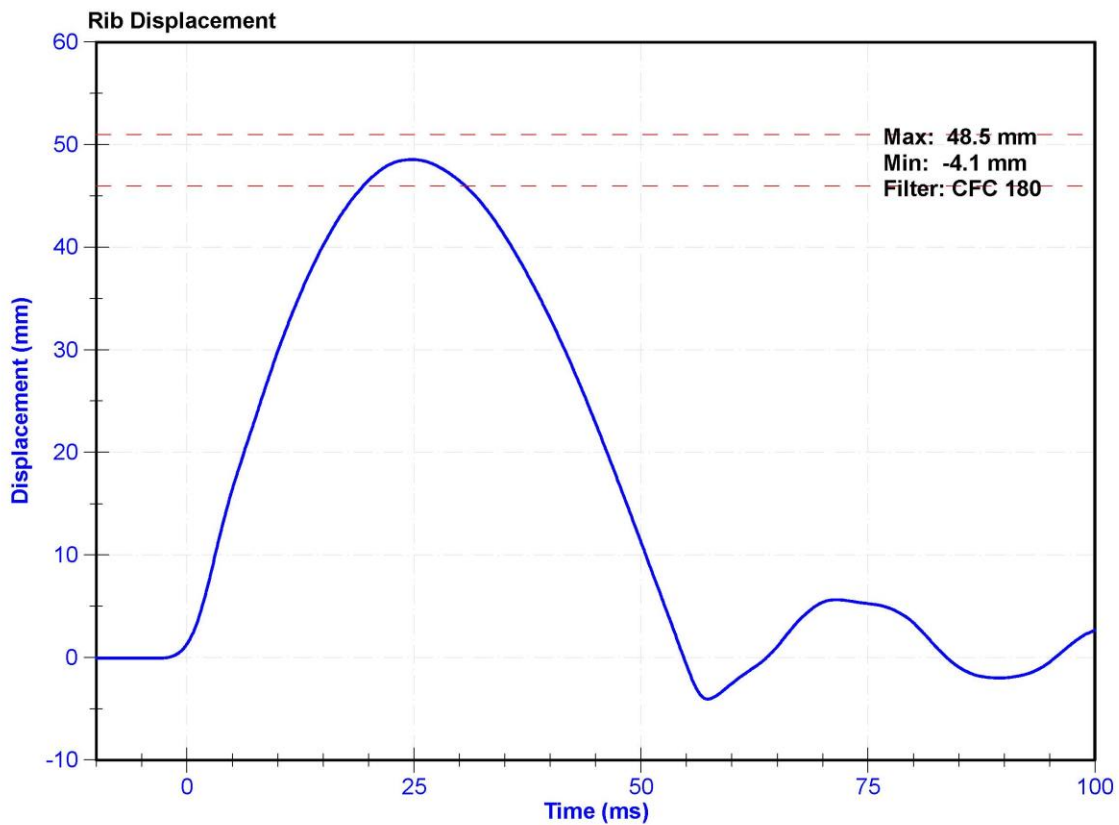


ATD Manufacturer	FTSS	Test Technician	S. Vacanti
ATD Serial Number	F033	Laboratory Supervisor	K. Brogan

Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	20.9	Pass
Humidity	10	70	%	28.0	Pass
Rib Displacement	36	40	mm	37.7	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Rib Potentiometer	Honeywell MLT-38000203	DS-185GFE	11/25/2020	5/26/2021

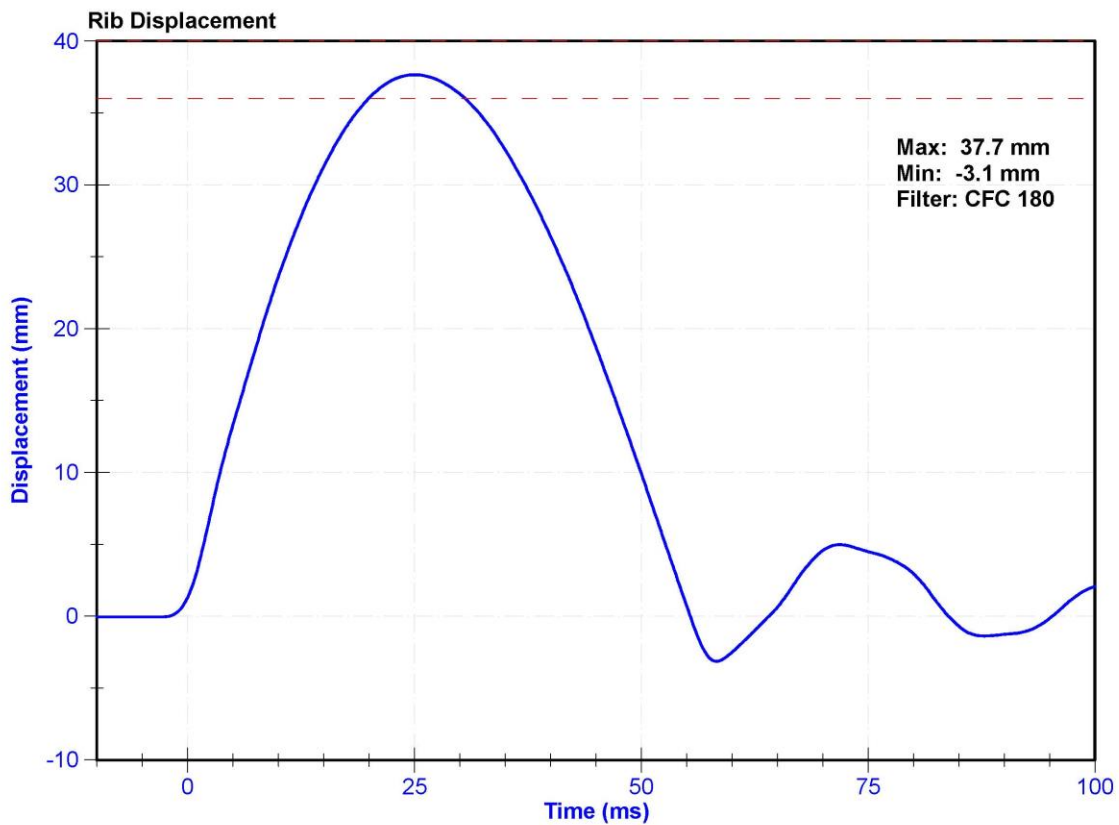


ATD Manufacturer	FTSS	Test Technician	S. Vacanti
ATD Serial Number	F033	Laboratory Supervisor	K. Brogan

Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	20.9	Pass
Humidity	10	70	%	28.0	Pass
Rib Displacement	46	51	mm	48.6	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Rib Potentiometer	Honeywell MLT-38000203	DS-185GFE	11/25/2020	5/26/2021

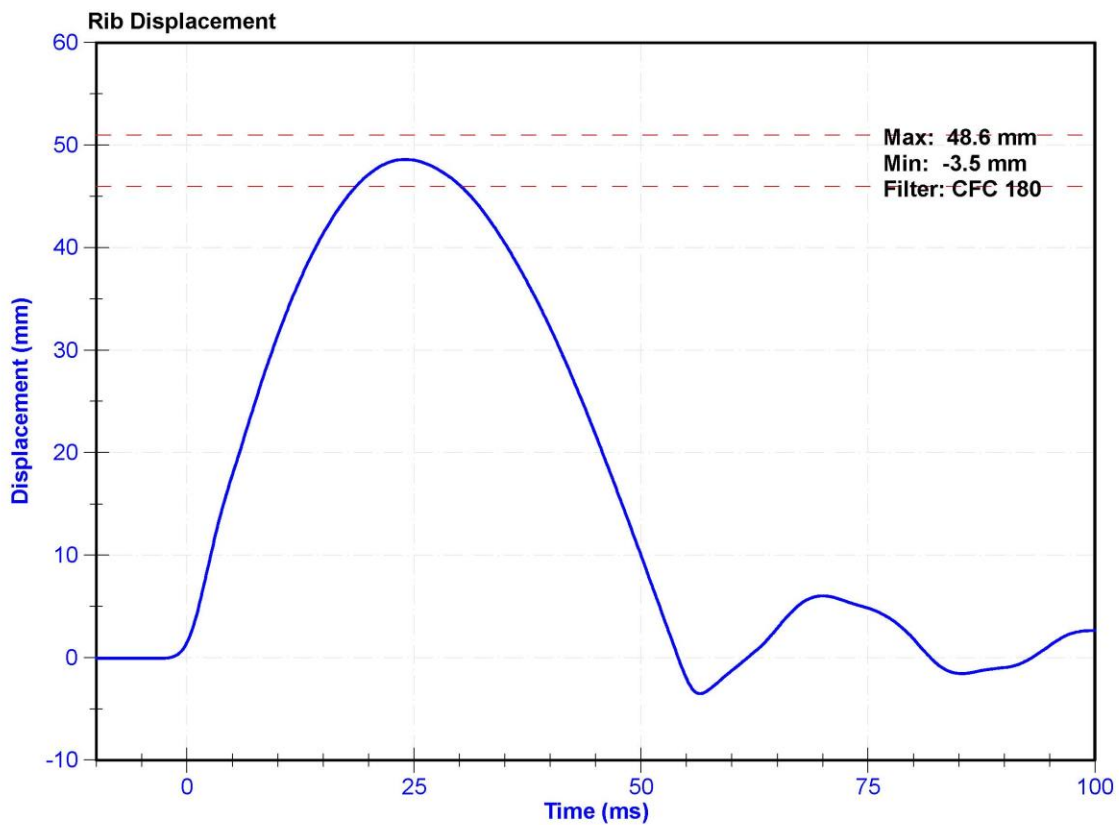


ATD Manufacturer	FTSS	Test Technician	S. Vacanti
ATD Serial Number	F033	Laboratory Supervisor	K. Brogan

Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	20.9	Pass
Humidity	10	70	%	28.0	Pass
Rib Displacement	36	40	mm	38.1	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Rib Potentiometer	Honeywell MLT-38000203	DS-178GFE	11/25/2020	5/26/2021

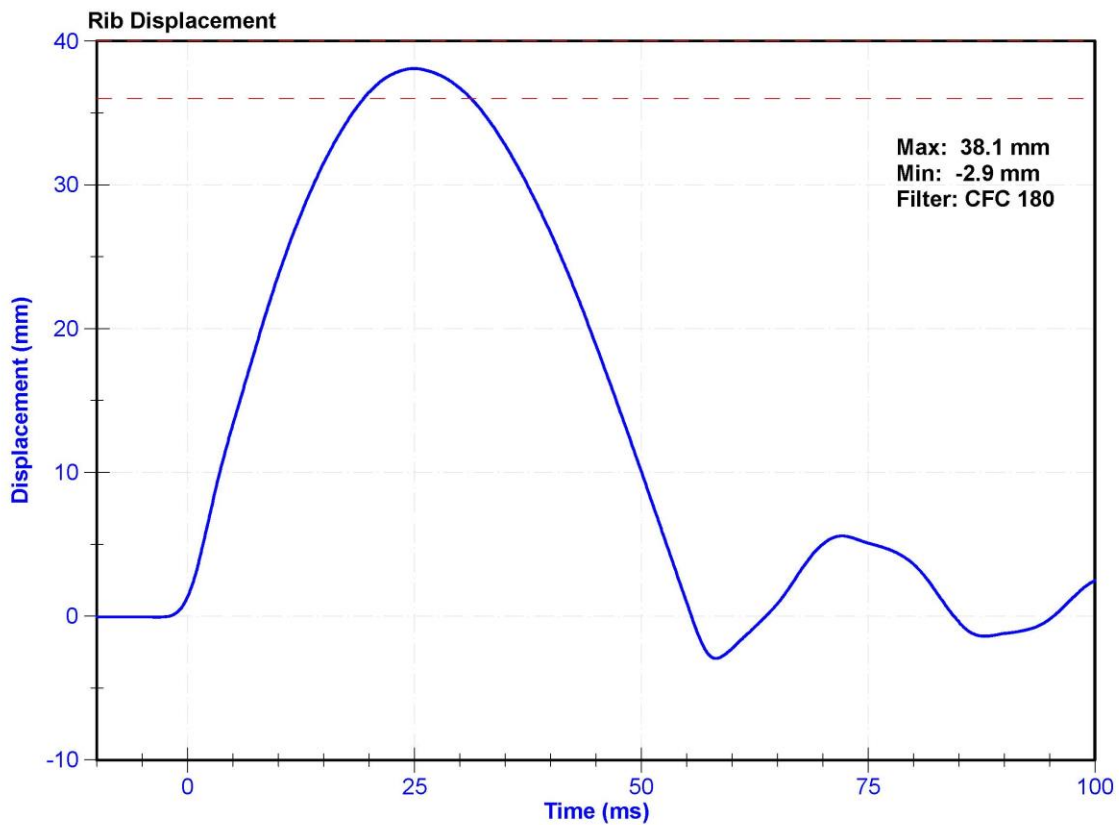


ATD Manufacturer	FTSS	Test Technician	S. Vacanti
ATD Serial Number	F033	Laboratory Supervisor	K. Brogan

Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	20.9	Pass
Humidity	10	70	%	28.0	Pass
Rib Displacement	46	51	mm	49.2	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Rib Potentiometer	Honeywell MLT-38000203	DS-178GFE	11/25/2020	5/26/2021

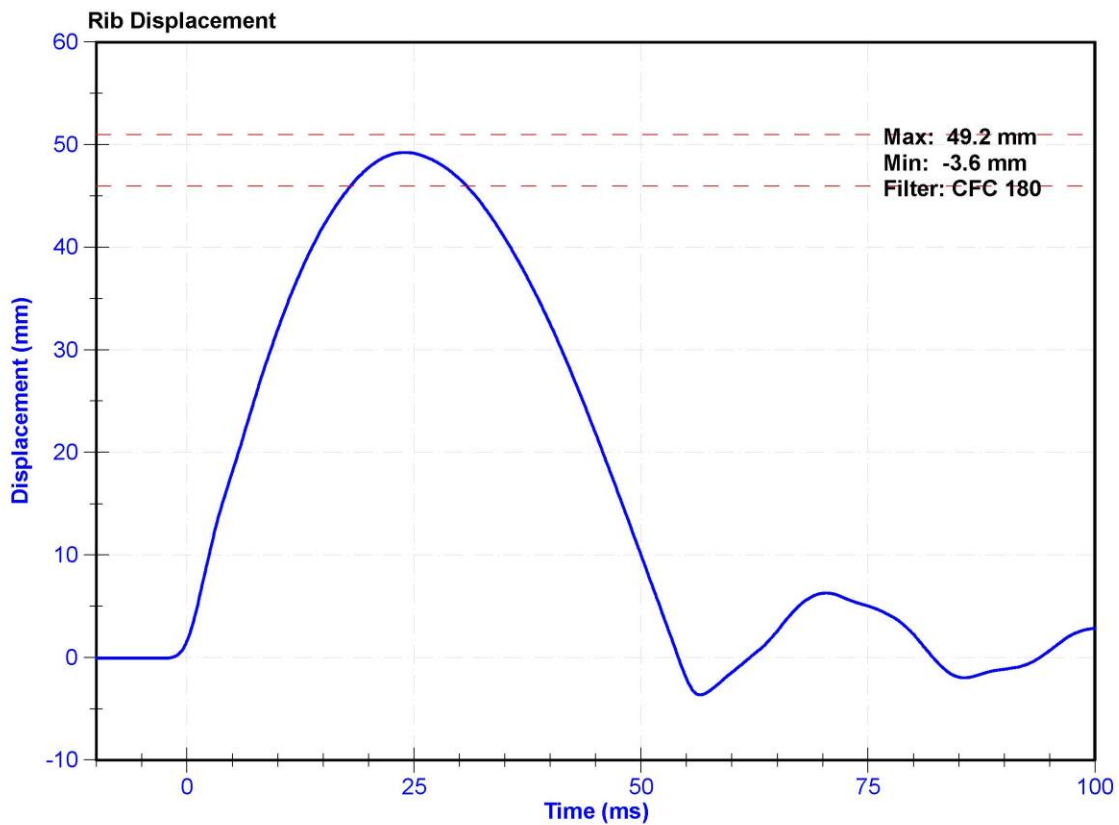


ATD Manufacturer	FTSS	Test Technician	S. Vacanti
ATD Serial Number	F033	Laboratory Supervisor	K. Brogan





Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	20.9	Pass
Humidity	10	70	%	28.0	Pass
Velocity	5.4	5.6	m/s	5.48	Pass
Resistive Force after 6ms	5100	6200	N	5144.0	Pass
Upper Thorax Rib Deflection	34	41	mm	36.8	Pass
Mid Thorax Rib Deflection	37	45	mm	41.6	Pass
Lower Thorax Rib Deflection	37	44	mm	41.8	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Probe Accelerometer	ENDEVCO 7264C-2K-TZ2	T25885	2/2/2021	2/2/2022
Upper Thorax Rib Potentiometer	Honeywell MLT-38000203	DS-179GFE	11/25/2020	5/26/2021
Middle Thorax Rib Potentiometer	Honeywell MLT-38000203	DS-185GFE	11/25/2020	5/26/2021
Lower Thorax Rib Potentiometer	Honeywell MLT-38000203	DS-178GFE	11/25/2020	5/26/2021

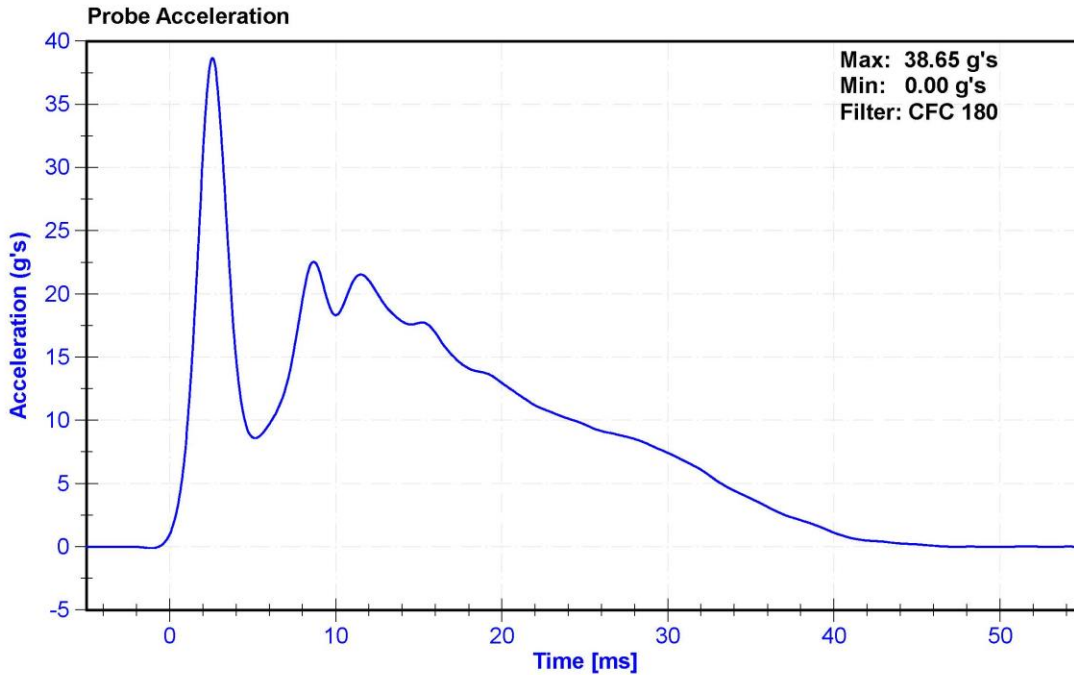

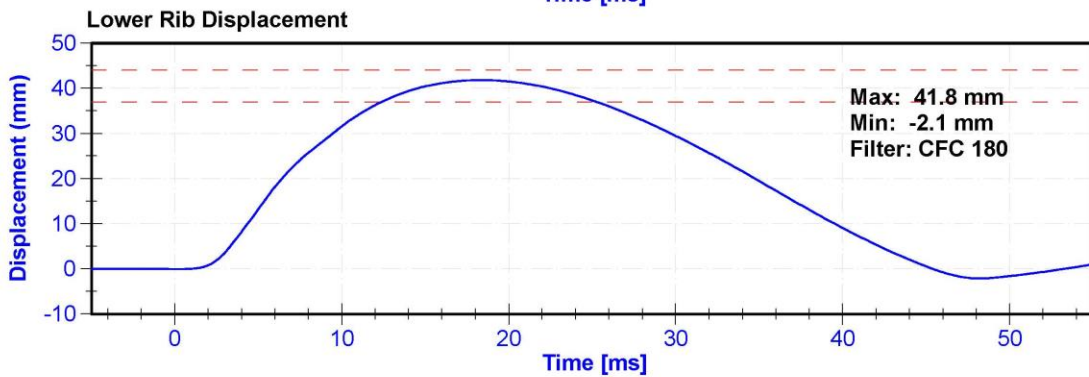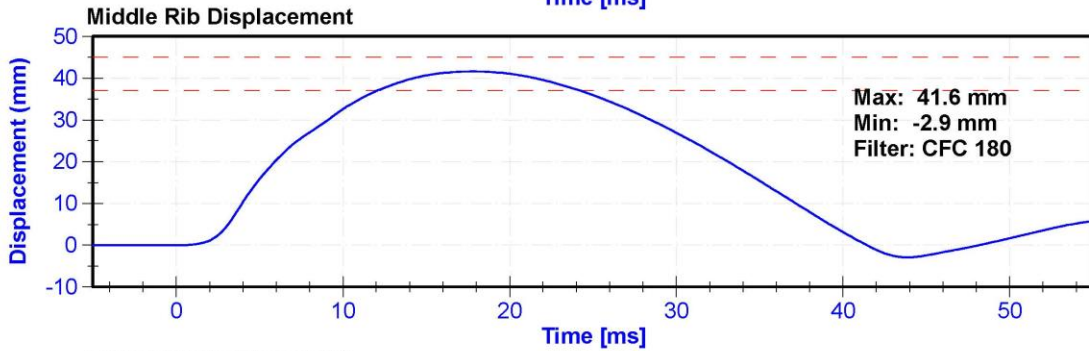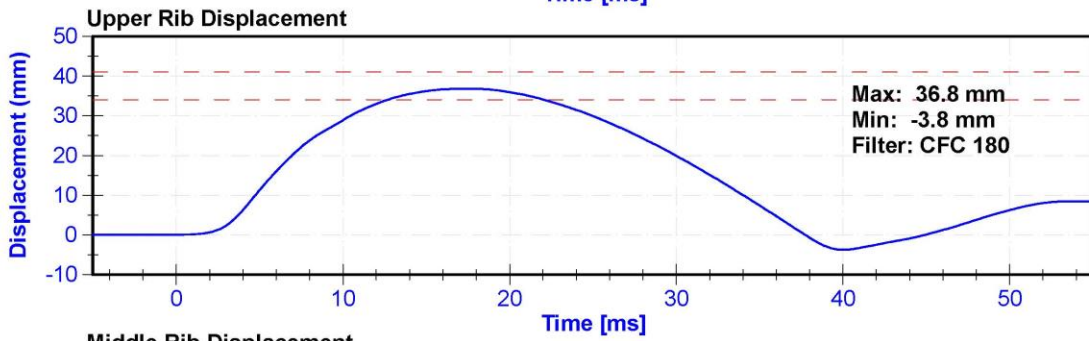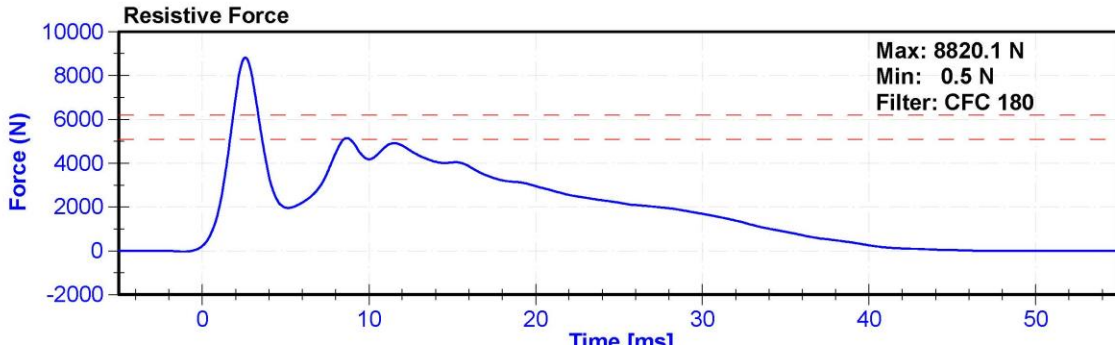


ATD Manufacturer	FTSS	Test Technician	S. Vacanti
ATD Serial Number	F033	Laboratory Supervisor	K.Brogan





Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	20.9	Pass
Humidity	10	70	%	28	Pass
Velocity	3.9	4.1	m/s	4.06	Pass
Combined Abdomen Force	2200	2700	N	2505.1	Pass
Time at Peak Abdomen Force	10.0	12.3	ms	10.05	Pass
Resistive Probe Force	4000	4800	N	4403.6	Pass
Time at Peak Resistive Force	10.6	13.0	ms	10.80	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	ENDEVCO 7264C	T25885	2/2/2021	2/2/2022
Front Abdomen Load Cell	FTSS 2631	LC-1509	11/10/2020	11/10/2021
Middle Abdomen Load Cell	DENTON 2631	LC-1508	11/10/2020	11/10/2021
Rear Abdomen Load Cell	FTSS 2631	LC-1507	11/10/2020	11/10/2021

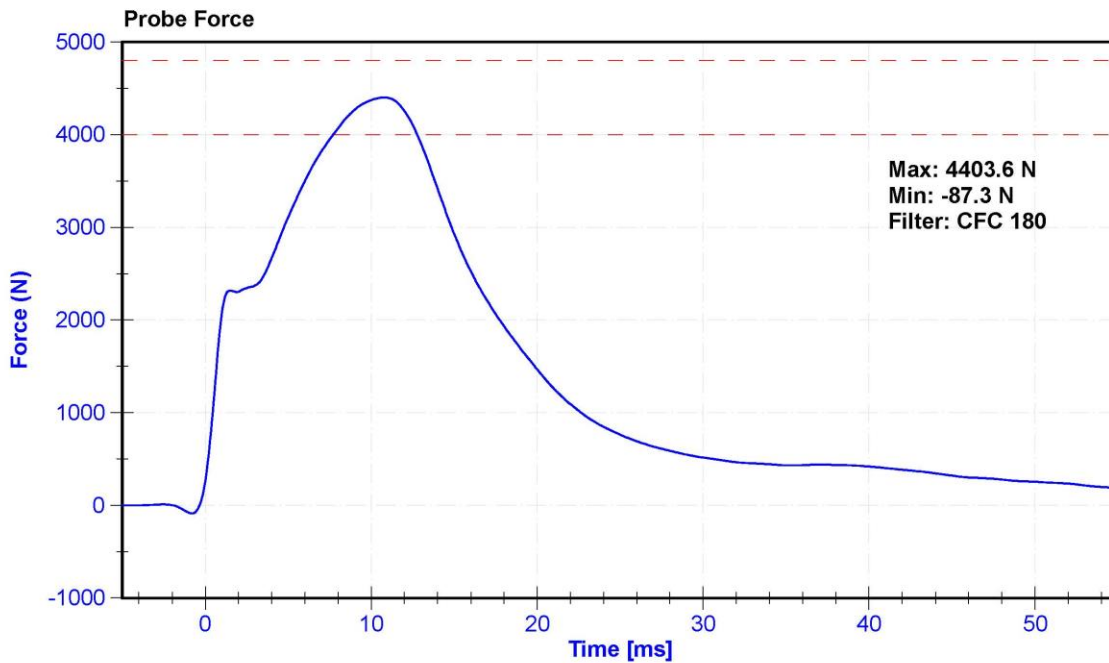

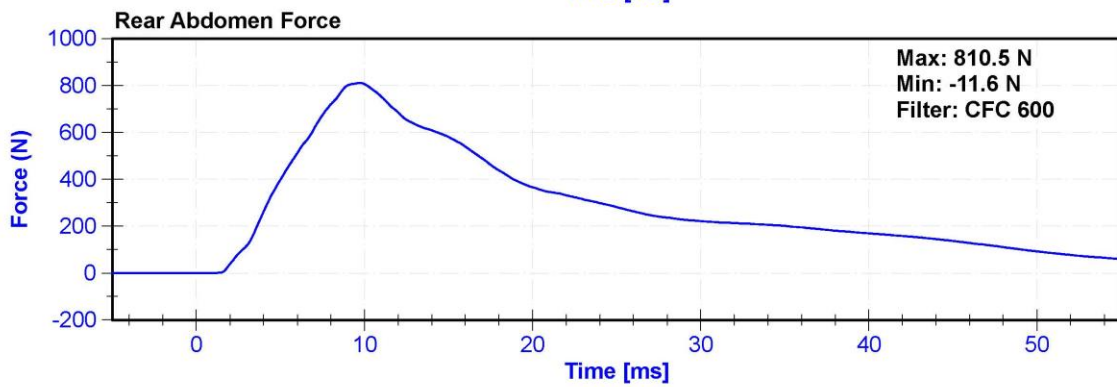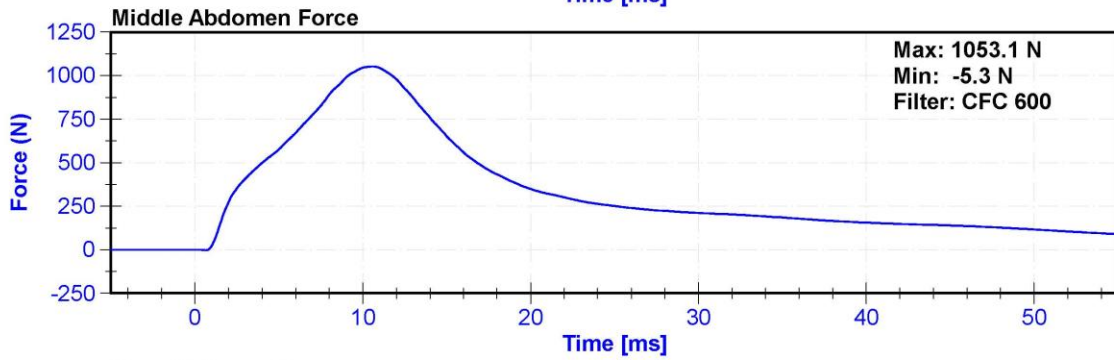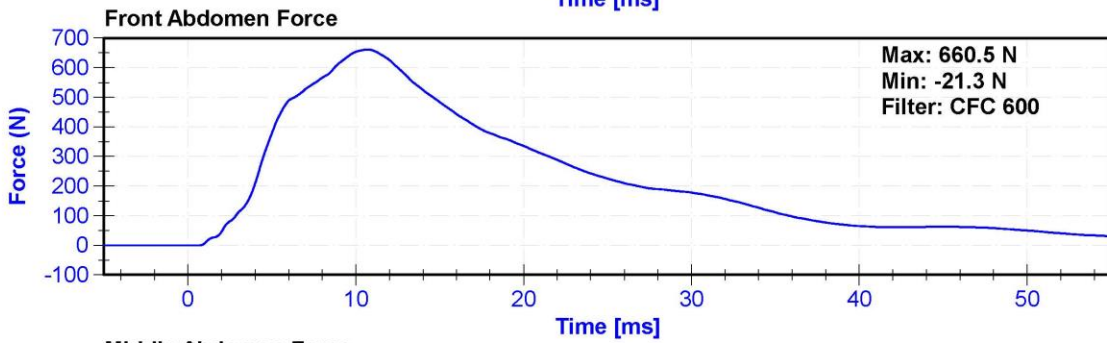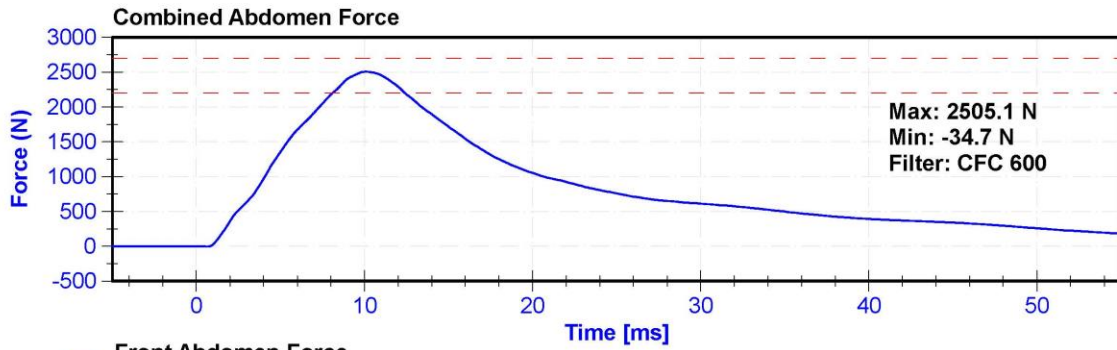



ATD Manufacturer	FTSS	Test Technician	D.Reinhard
ATD Serial Number	F033	Laboratory Supervisor	K. Brogan



Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	20.6	Pass
Humidity	10	70	%	26.0	Pass
Velocity	5.95	6.15	m/s	6.005	Pass
Lateral Spine Rotation	45	55	deg	53.6	Pass
Time at Maximum Rotation	39	53	ms	46.3	Pass
Time of Decay to Zero Degrees	37	57	ms	39.4	Pass
Pulse within Corridor?	-	-	-		

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	ENDEVCO 7231CT	AC-C16503 Striker	2/5/2021	2/5/2022
Pendulum "A" Potentiometer	SP22G	DS-094	8/18/2020	8/18/2021
Condyle "B" Potentiometer	SP22G	DS-095	8/18/2020	8/18/2021

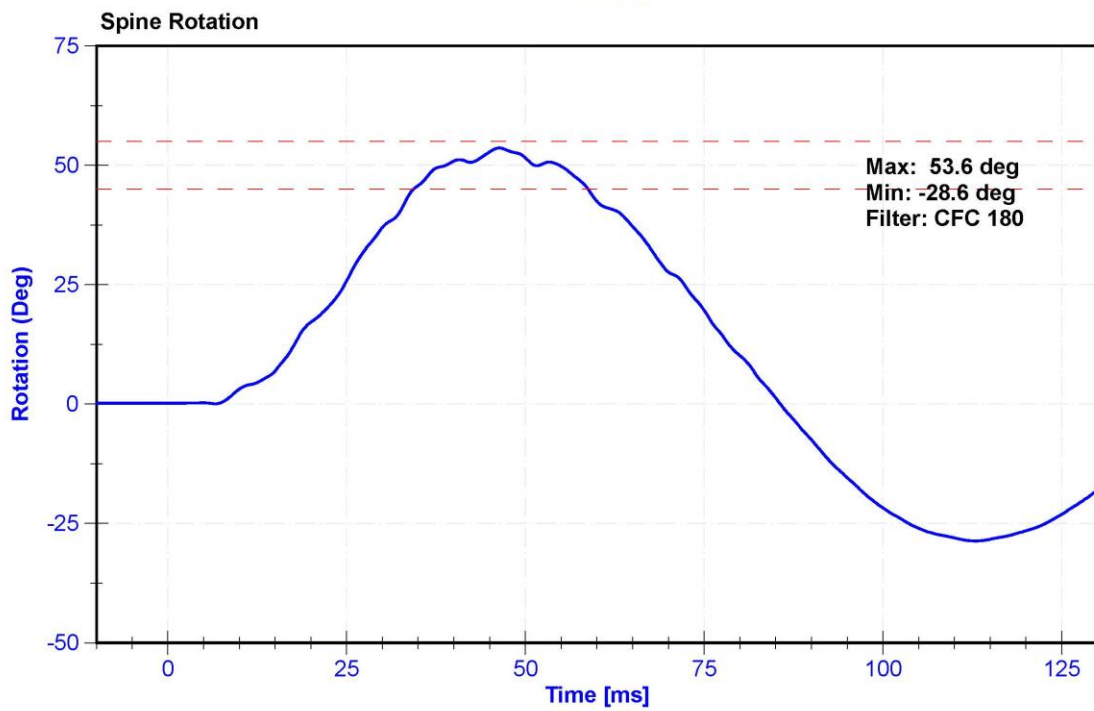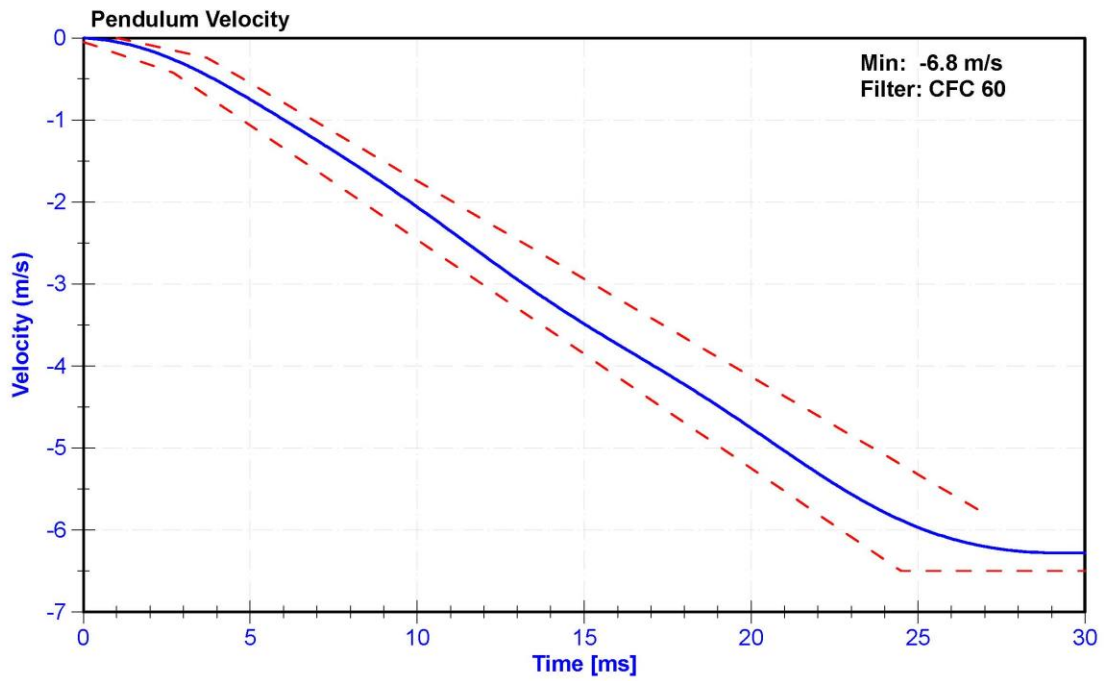

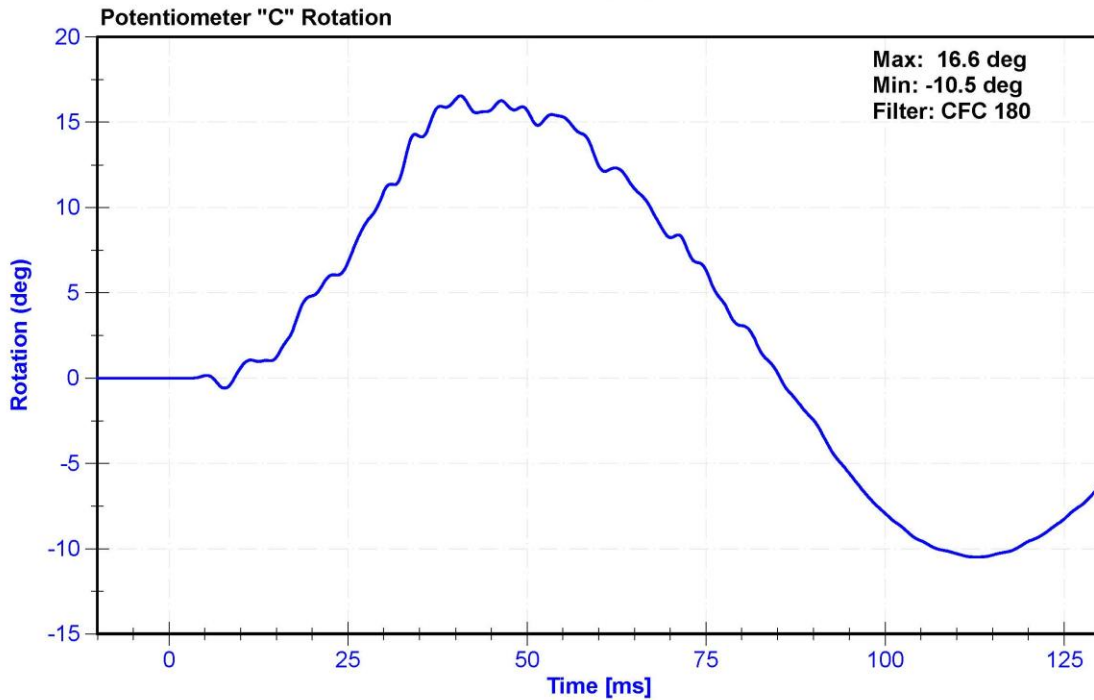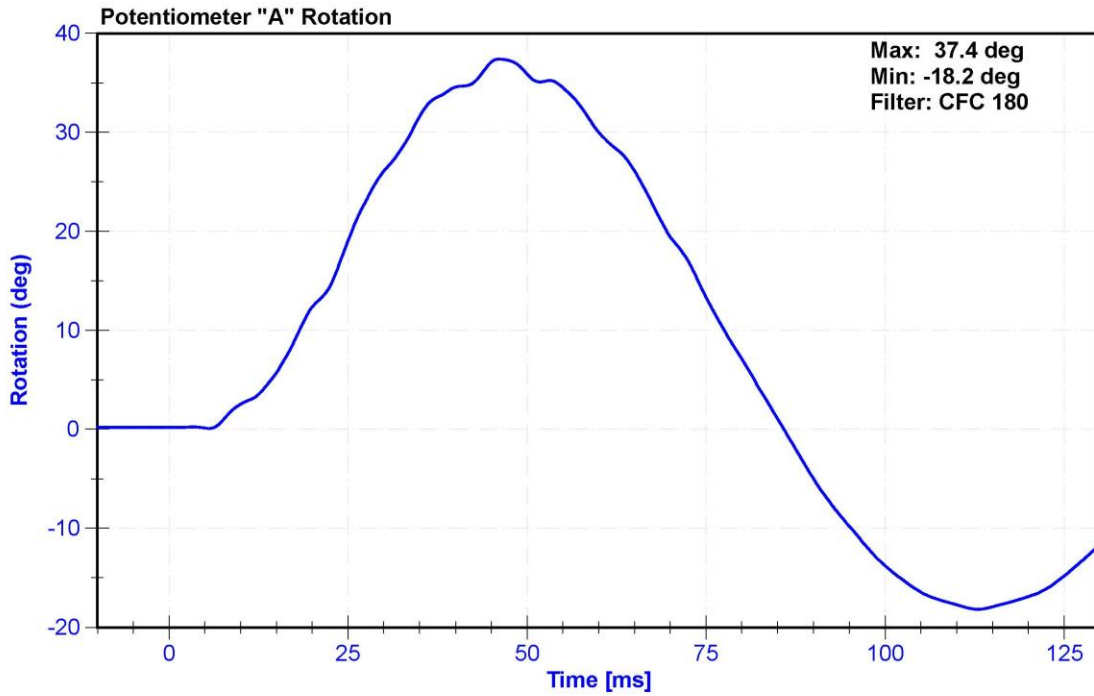


ATD Manufacturer	FTSS	Test Technician	S. Vacanti
ATD Serial Number	F033	Laboratory Supervisor	K. Brogan



Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	20.9	Pass
Humidity	10	70	%	28.0	Pass
Velocity	4.2	4.4	m/s	4.39	Pass
Resistive Force	4700	5400	N	4989.0	Pass
Time at Peak Resistive Force	11.8	16.1	ms	12.20	Pass
Pubic Force	-1590	-1230	N	-1289.4	Pass
Time at Peak Pubic Force	12.2	17.0	ms	12.50	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	ENDEVCO 7264C	T25885	2/2/2021	2/2/2022
Pubic Load Cell	Denton 3096JFL	LC-464fy	7/23/2020	7/23/2021

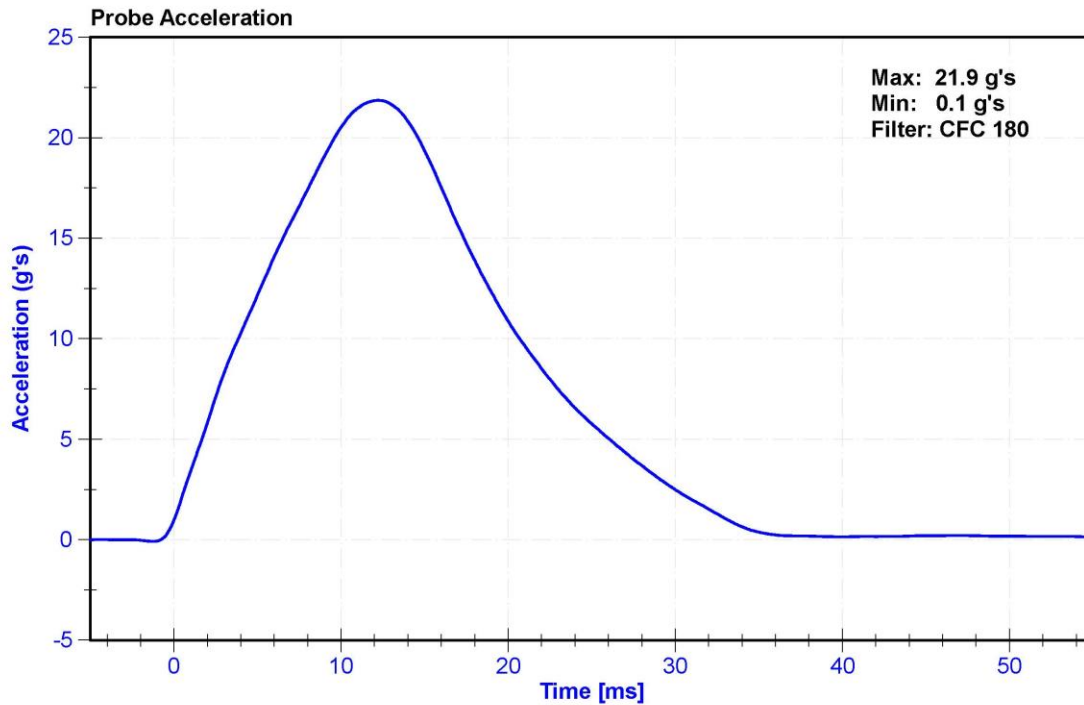

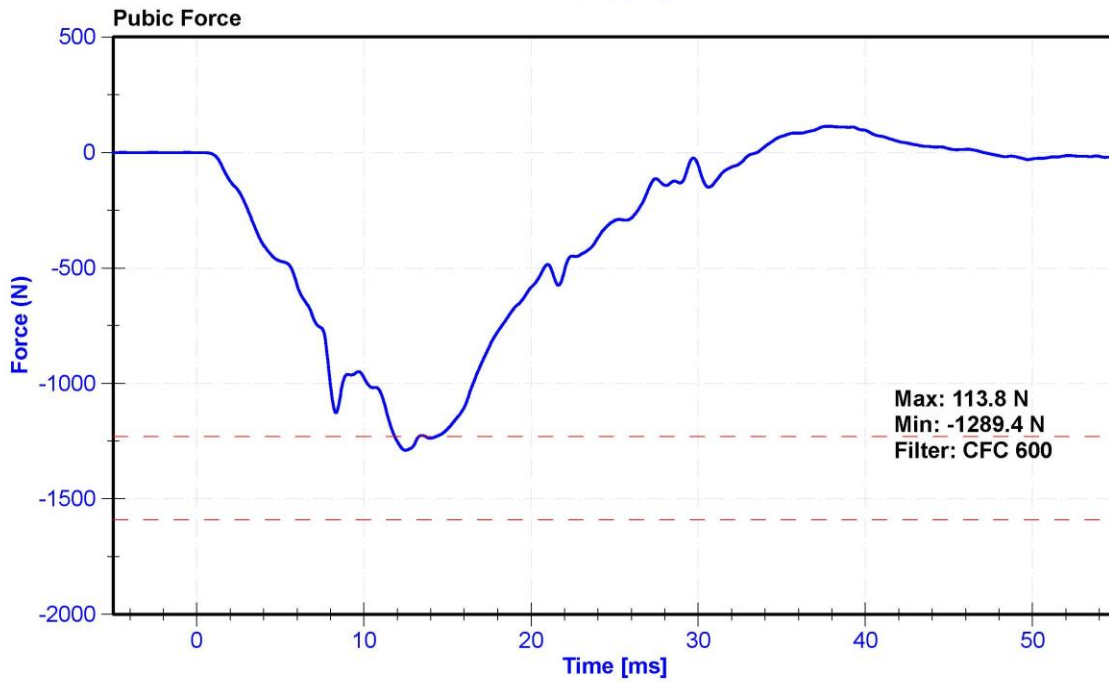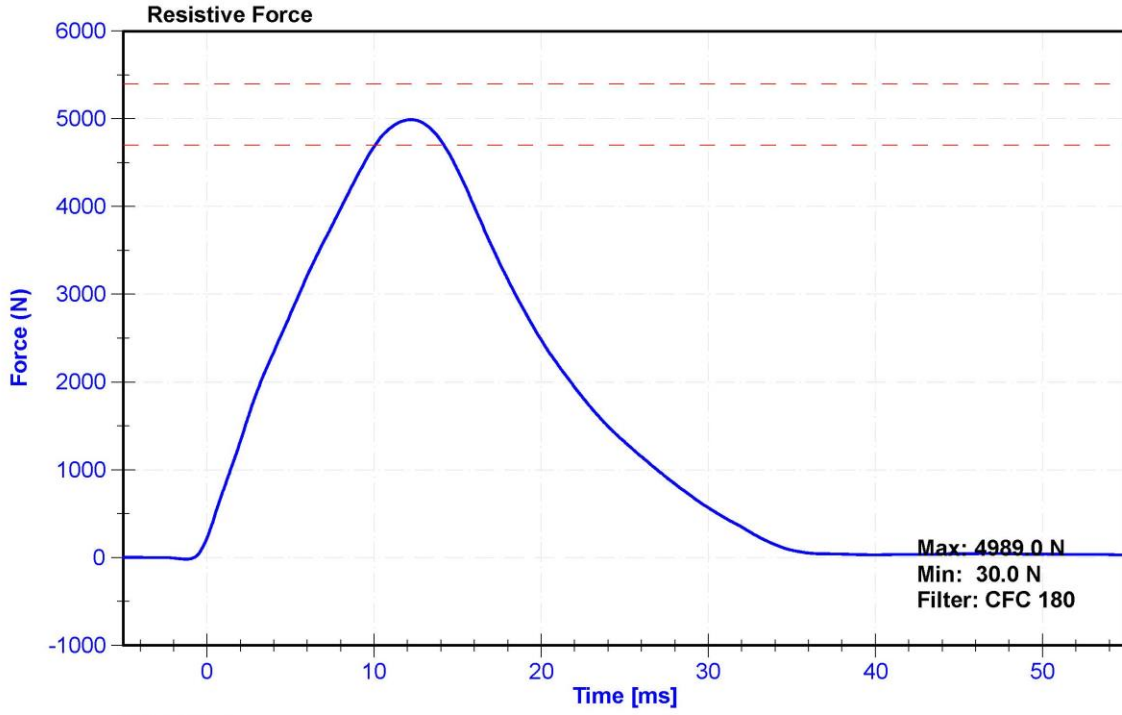

CALIBRATION TEST RESULTS

POST-TEST

SID-IIS 5TH PERCENTILE FEMALE - PASSENGER ATD

SERIAL No: 300




External Measurements - SID-IIs

Technician: K. Brogan

Date: 03/16/2021

Dummy Serial Number: 300

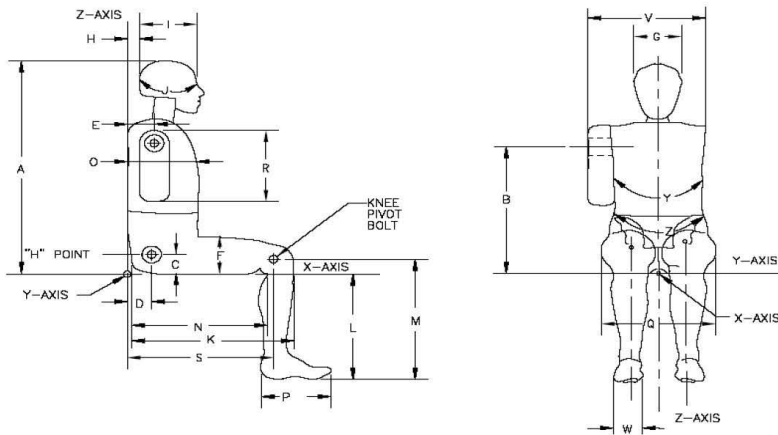

Symbol	Description	Specification (mm)		Result (mm)	Pass/Fail
A	Sitting Height	772	788	782	Pass
B	Shoulder Pivot Height	437	453	446	Pass
C	H-point Height	79	89	84	Pass
D	H-point from seatback	141	151	145	Pass
E	Shoulder Pivot from Backline	97	107	104	Pass
F	Thigh Clearance	119	135	126	Pass
G	Head Breadth	140	148	144	Pass
H	Head Back from Backline	40	46	43	Pass
I	Head Depth	178	188	186	Pass
J	Head Circumference	541	551	546	Pass
K	Buttock to Knee Length	514	540	532	Pass
L	Popliteal Height	343	369	361	Pass
M	Knee Pivot to floor height	392	409	398	Pass
N	Buttock Popliteal Length	416	442	430	Pass
O	Chest Depth w/o jacket	195	211	208	Pass
P	Foot Length	216	232	220	Pass
Q	Hip Breadth (w/pelvic plugs)	313	323	318	Pass
R	Arm Length	249	259	254	Pass
S	Knee Joint to seatback	477	493	484	Pass
V	Shoulder Width	341	357	352	Pass
W	Foot Width	78	94	83	Pass
Y	Chest Circumference w/jacket	851	881	875	Pass
Z	Waist Circumference	761	791	773	Pass


ATD Manufacturer	FTSS	Test Technician	S. Vacanti
ATD Serial Number	300	Laboratory Supervisor	K. Brogan




Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	20.9	Pass
Humidity	10	70	%	24	Pass
Resultant Acceleration	115	137	g's	121.1	Pass
Oscillation	0	15	%	1.7	Pass
Fore-Aft Acceleration	-15	15	g's	3.9	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
X Accelerometer	ENDEVCO 7264CT	AC-P59018	11/10/2020	5/11/2021
Y Accelerometer	ENDEVCO 7264	AC-P79189	11/10/2020	5/11/2021
Z Accelerometer	ENDEVCO 7264CT	AC-P58777	11/10/2020	5/11/2021

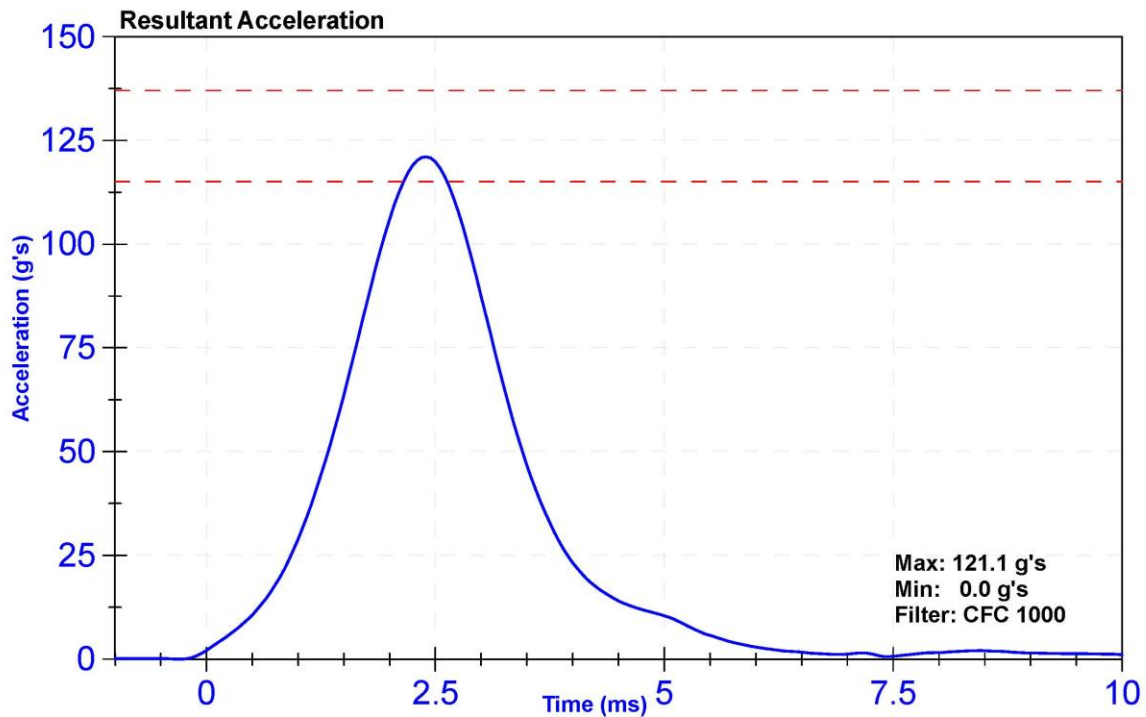

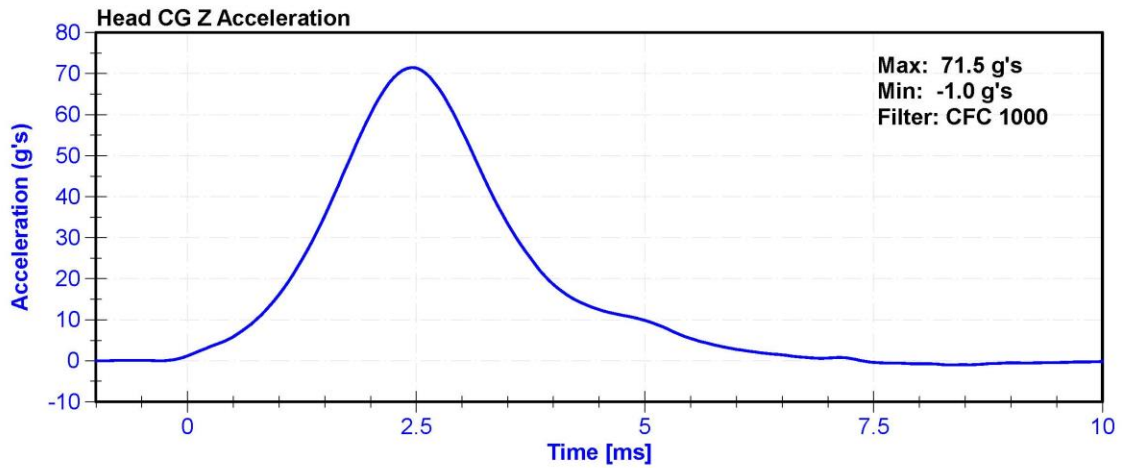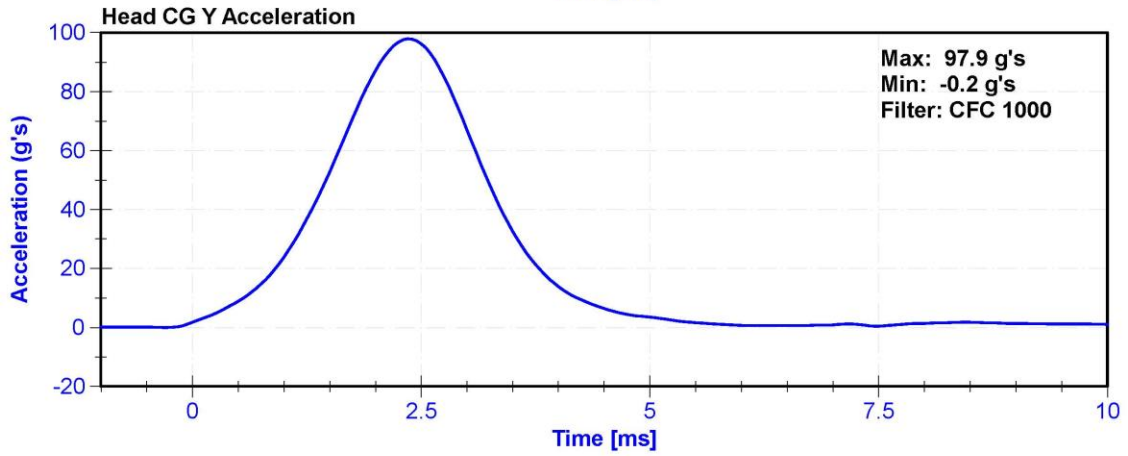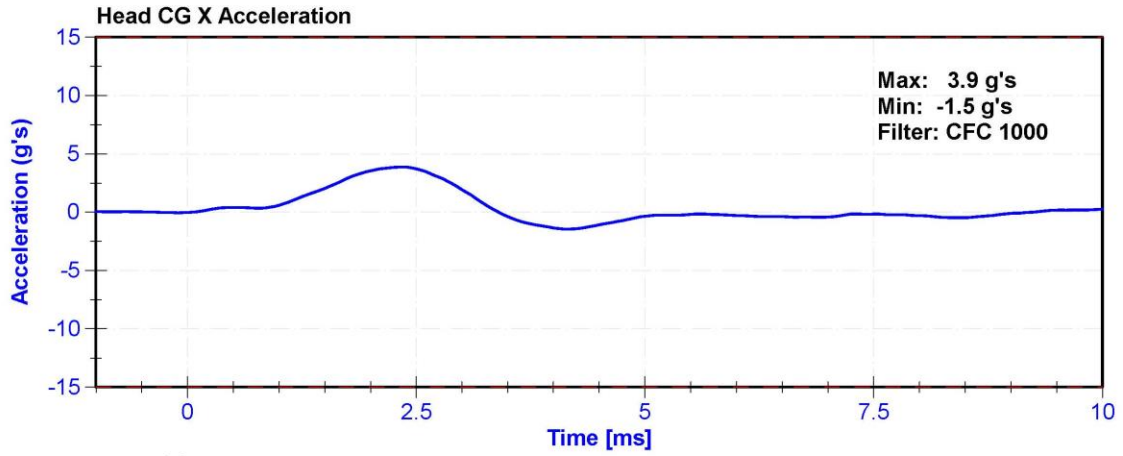


ATD Manufacturer	FTSS	Test Technician	S. Vacanti
ATD Serial Number	300	Laboratory Supervisor	K. Brogan



Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	20.9	Pass
Humidity	10	70	%	24	Pass
Velocity	5.51	5.63	m/s	5.549	Pass
Pendulum Impulse at 10ms	2.2	2.8	m/s	2.26	Pass
Pendulum Impulse at 15ms	3.3	4.1	m/s	3.47	Pass
Pendulum Impulse at 20ms	4.4	5.4	m/s	4.64	Pass
Pendulum Impulse at 25ms	5.4	6.1	m/s	5.59	Pass
Pendulum Impulse from 25 to 100ms	5.5	6.2	m/s	5.79	Pass
Neck Rotation	71	81	deg	80.5	Pass
Time at Maximum Rotation	50	70	ms	61.1	Pass
Moment about the OC	36	44	Nm	42.1	Pass
Moment Decay to 0 Nm	102	126	ms	115.3	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	ENDEVCO 7231CT	AC-C16503 Striker	2/5/2021	2/5/2022
Pendulum Potentiometer	Denton 78051-342	DS-184Pend	11/6/2020	11/6/2021
Condyle Potentiometer	Denton 78051-342	DS-185Pend	11/6/2020	11/6/2021
Upper Neck Load Cell	Denton 1716	17162019 FY	3/18/2020	3/18/2021

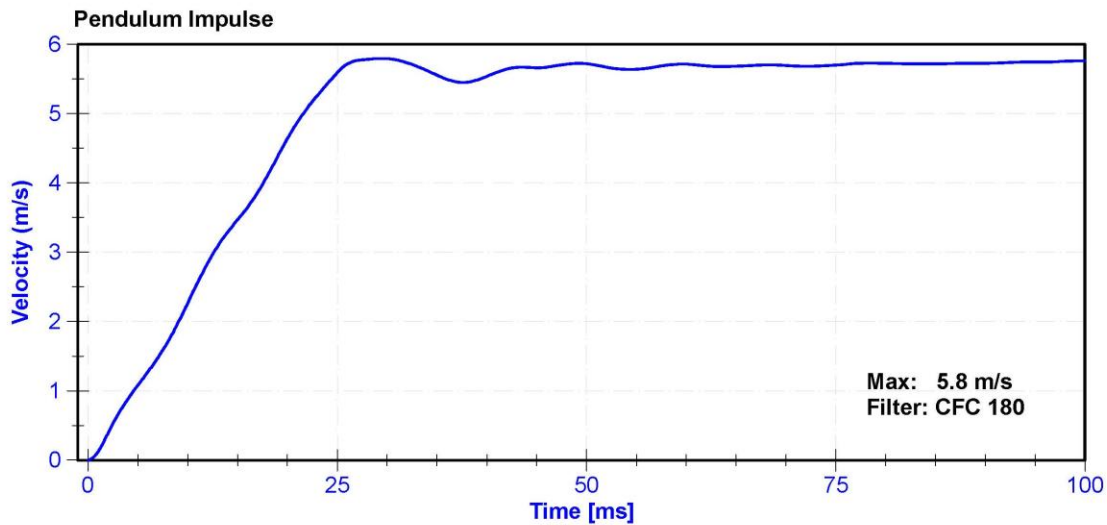

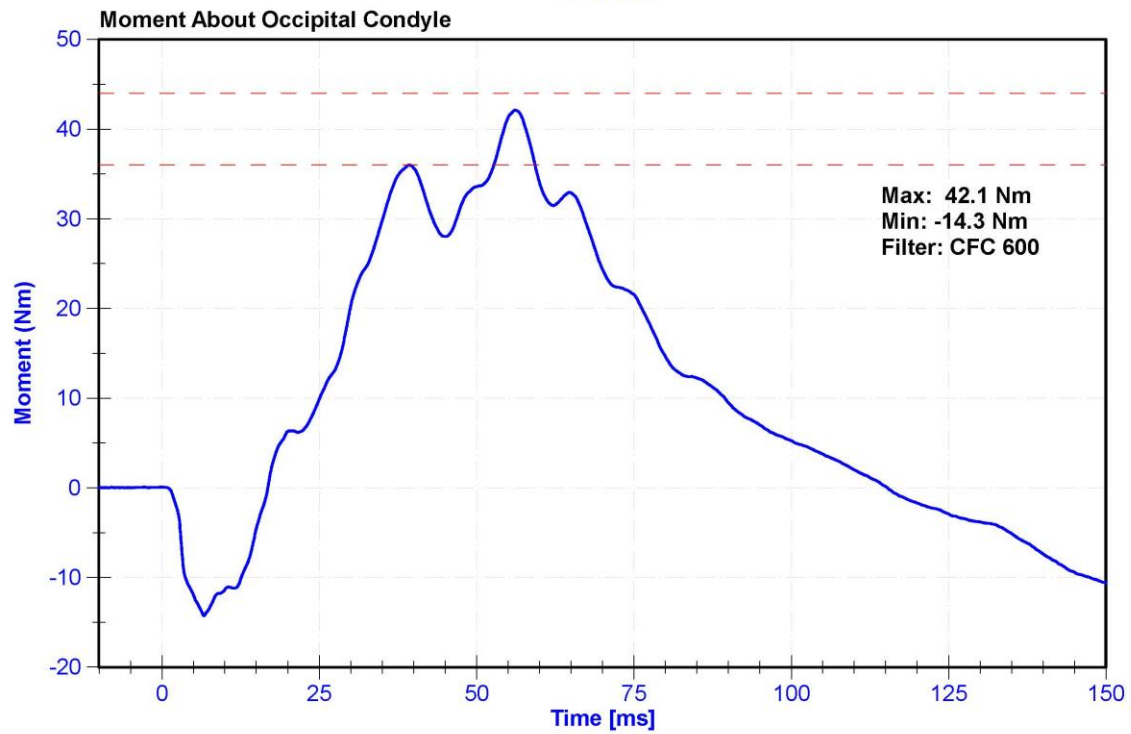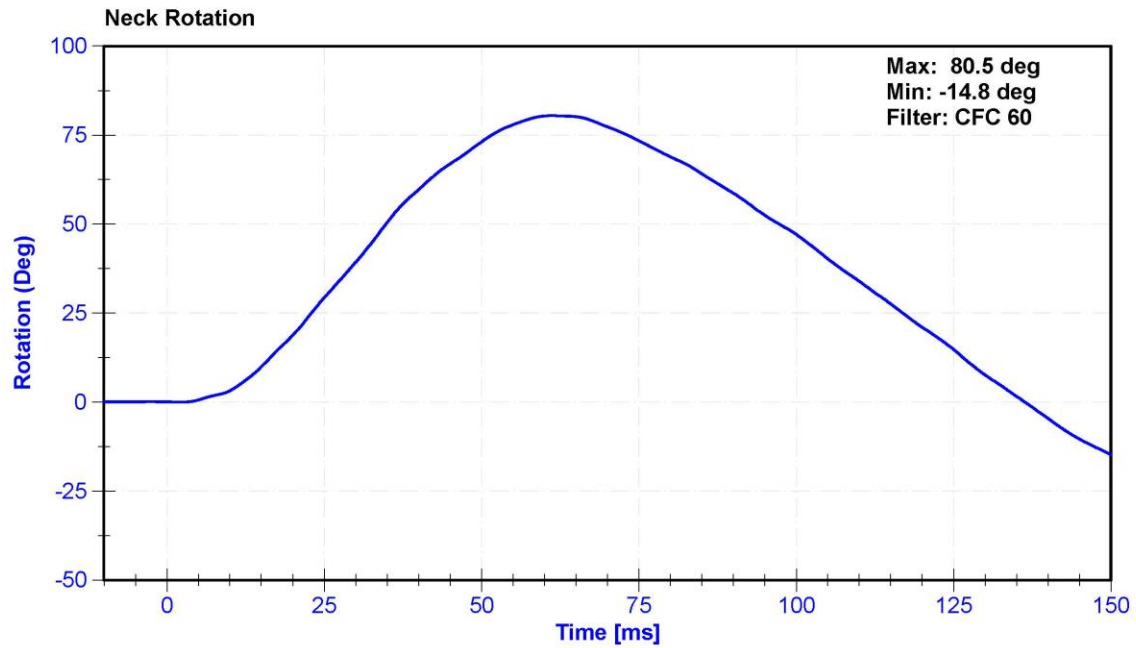


ATD Manufacturer	FTSS	Test Technician	D.Reinhard
ATD Serial Number	300	Laboratory Supervisor	K. Brogan



Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	20.8	Pass
Humidity	10	70	%	22	Pass
Velocity	4.2	4.4	m/s	4.32	Pass
Probe Acceleration	13	18	g's	15.1	Pass
Shoulder Deflection	28	37	mm	30.7	Pass
Lateral Upper Spine Acceleration	17	22	g's	21.6	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	ENDEVCO 7264C	T25885	2/2/2021	2/2/2022
Shoulder Potentiometer	Servo 08CT1-3725	DS-053 GFE	11/10/2020	5/11/2021
Upper Spine Y Accelerometer	ENDEVCO 7264CT	AC-P71281	11/9/2020	5/10/2021

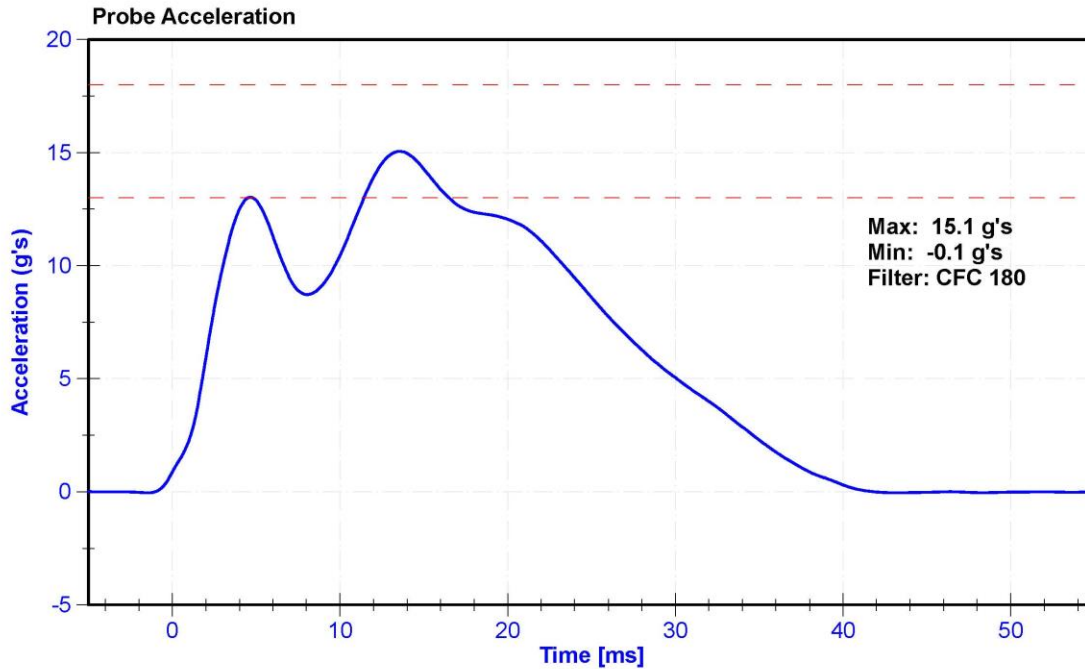

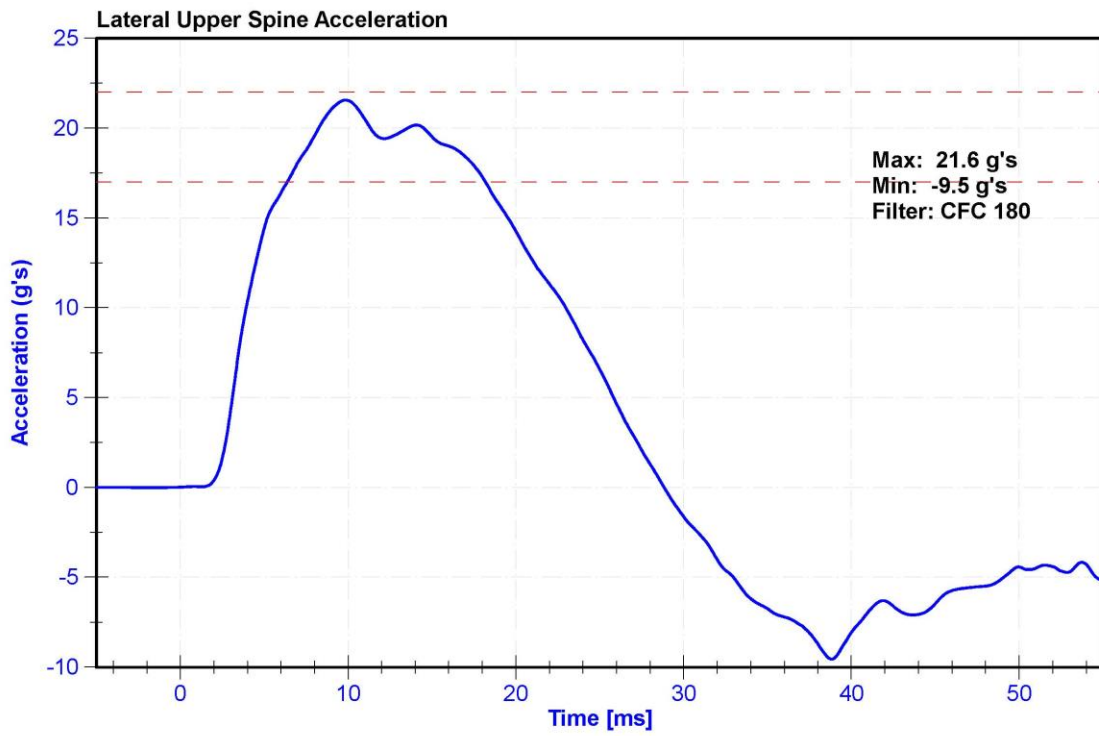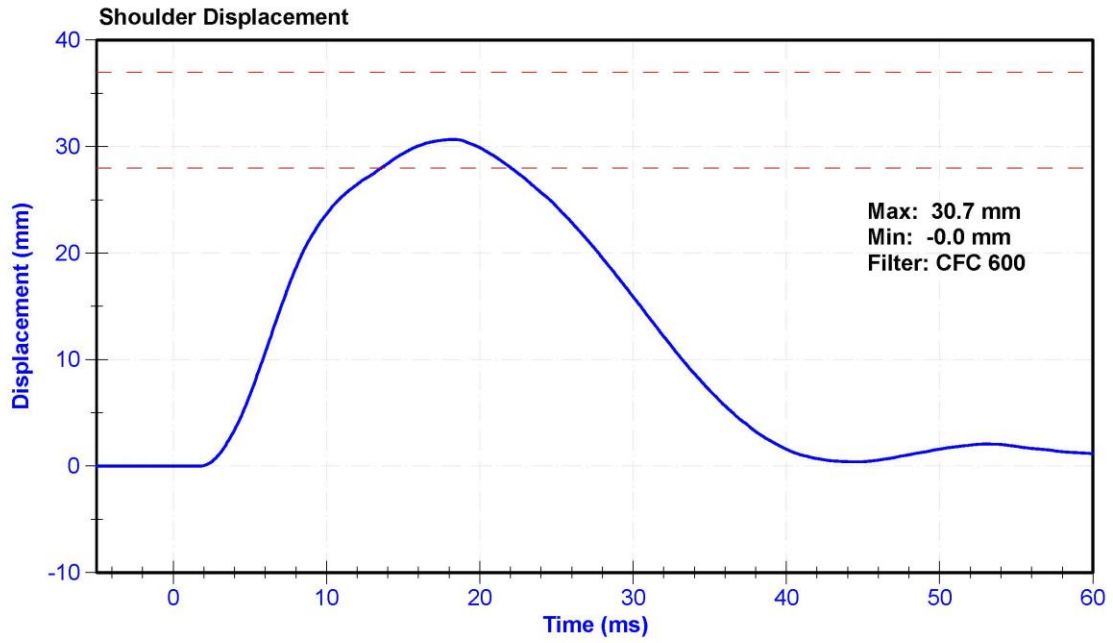


ATD Manufacturer	FTSS	Test Technician	D.Reinhard
ATD Serial Number	300	Laboratory Supervisor	K. Brogan





Results



Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	20.9	Pass
Humidity	10	70	%	31.0	Pass
Velocity	6.6	6.8	m/s	6.74	Pass
Probe Acceleration after 5 ms	30	36	g's	32.3	Pass
Lateral Upper Spine Acceleration	34	43	g's	40.1	Pass
Lateral Lower Spine Acceleration	29	37	g's	32.4	Pass
Shoulder Deflection	31	40	mm	33.6	Pass
Upper Thorax Rib Deflection	25	32	mm	26.1	Pass
Mid Thorax Rib Deflection	30	36	mm	31.6	Pass
Lower Thorax Rib Deflection	32	38	mm	33.4	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	ENDEVCO 7264C	T25885	2/2/2021	2/2/2022
Upper Spine T1 Y Accelerometer	ENDEVCO 7264CT	AC-P71281	11/9/2020	5/10/2021
Upper Spine T12 Y Accelerometer	ENDEVCO 7264	AC-P64147	11/9/2020	5/10/2021
Shoulder Potentiometer	Servo 08CT1-3725	DS-053 GFE	11/10/2020	5/11/2021
Upper Thorax Rib Potentiometer	Servo 08CT1-3725	DS-451GFE	11/10/2020	5/11/2021
Middle Thorax Rib Potentiometer	Servo 08TC1-3745	DS-040GFE	11/10/2020	5/11/2021
Lower Thorax Rib Potentiometer	Servo 08TC1-3725	DS-1156GFE	11/9/2020	5/10/2021

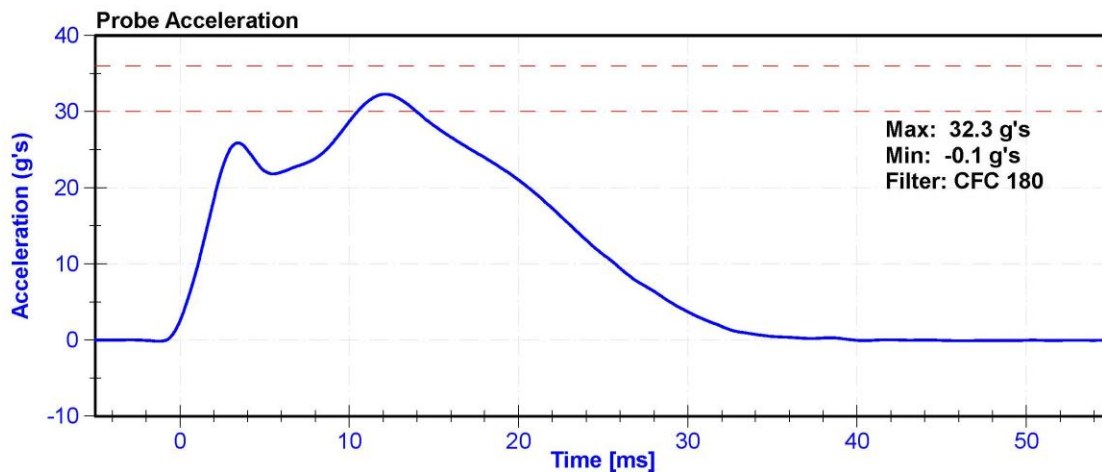

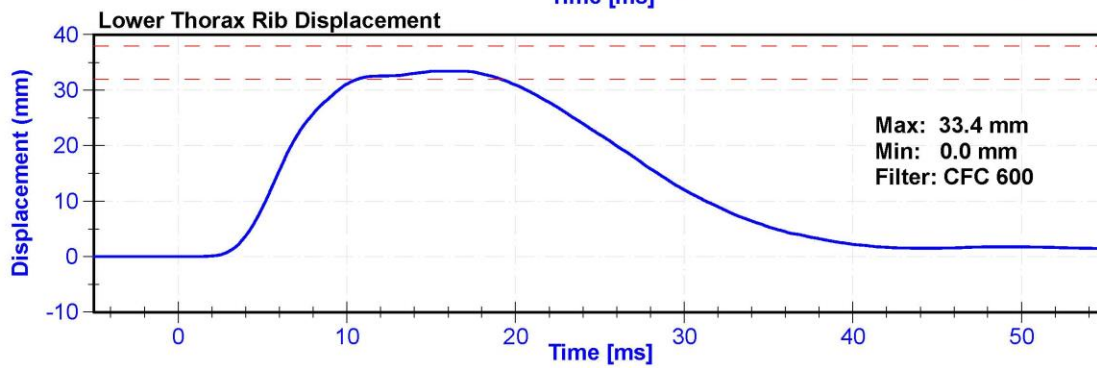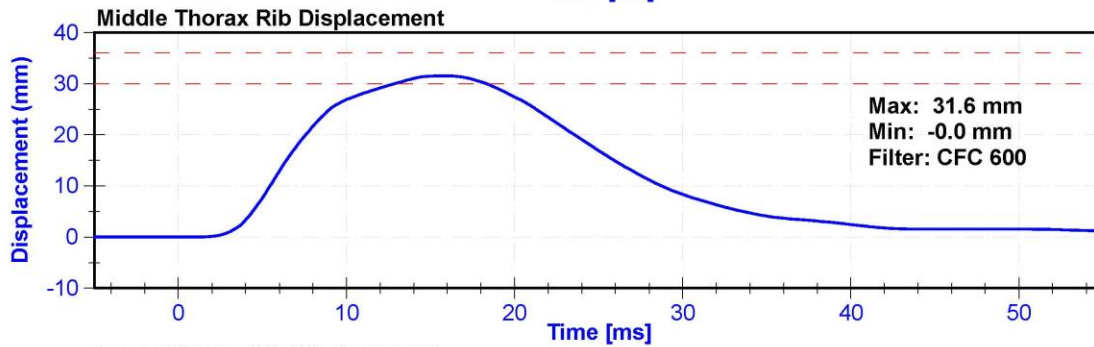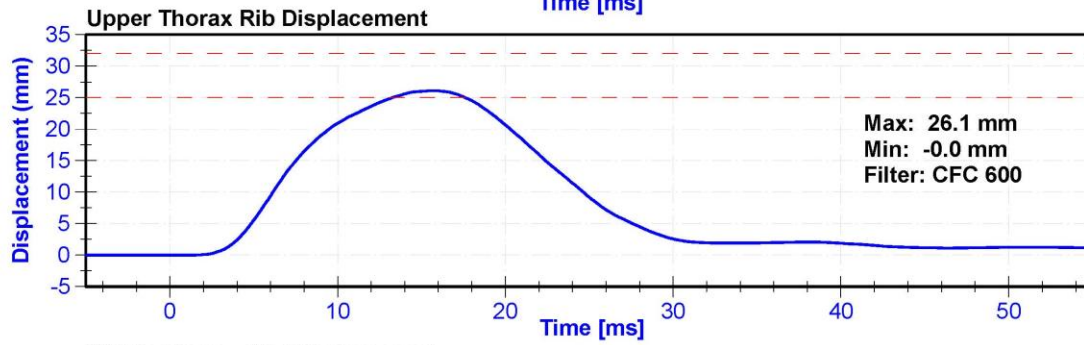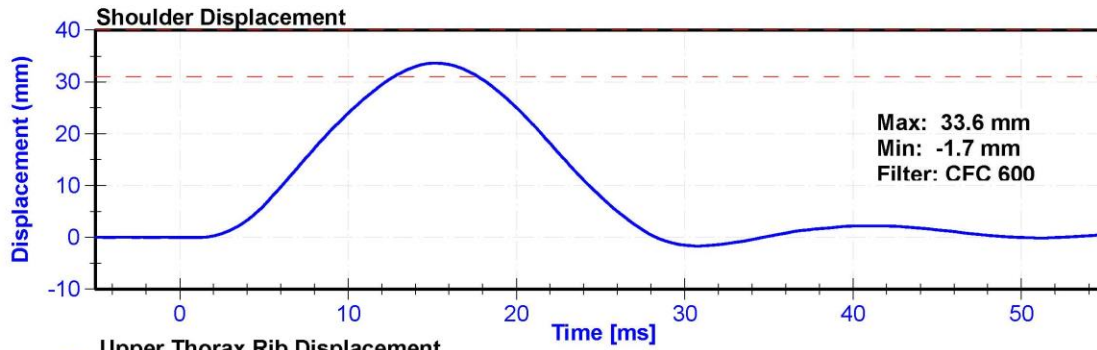

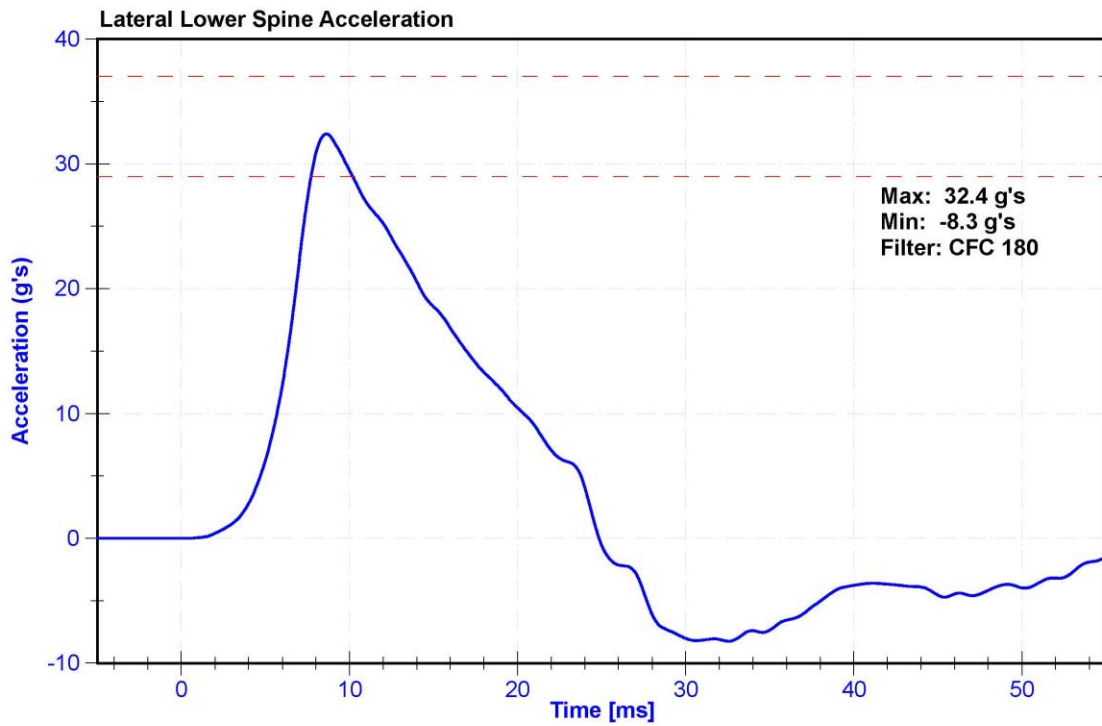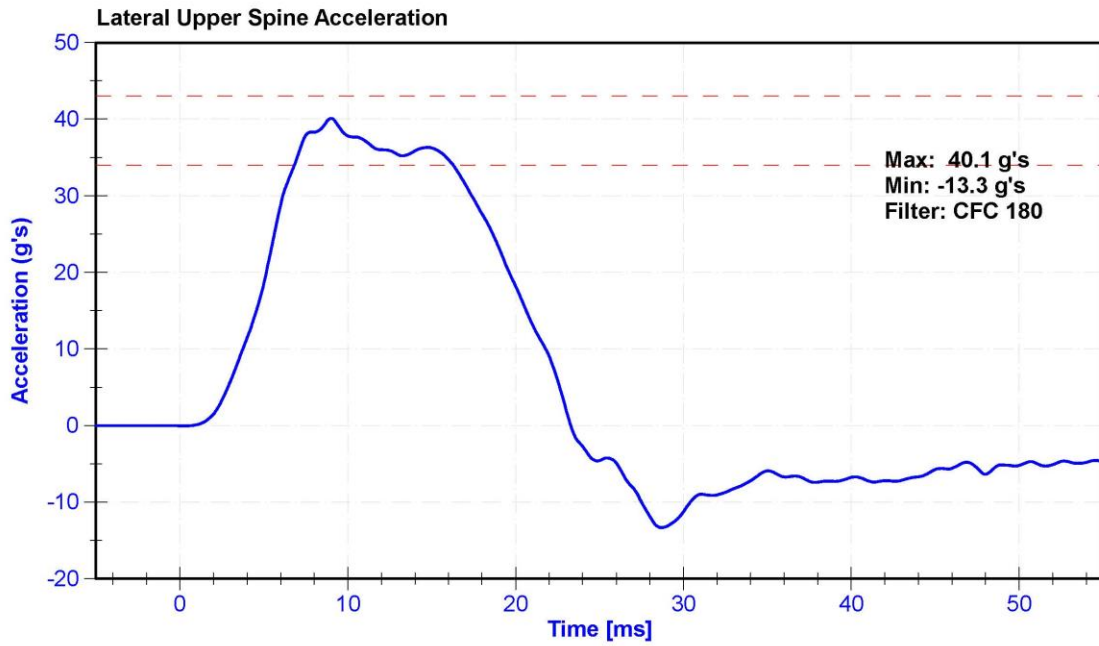


ATD Manufacturer	FTSS	Test Technician	D.Reinhard
ATD Serial Number	300	Laboratory Supervisor	K. Brogan




Results



Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	20.9	Pass
Humidity	10	70	%	29	Pass
Velocity	4.2	4.4	m/s	4.37	Pass
Probe Acceleration	14	18	g's	15.6	Pass
Lateral Upper Spine Acceleration	13	17	g's	16.7	Pass
Lateral Lower Spine Acceleration	7	11	g's	9.9	Pass
Upper Thorax Rib Deflection	32	40	mm	34.3	Pass
Middle Thorax Rib Deflection	39	45	mm	40.8	Pass
Lower Thorax Rib Deflection	35	43	mm	37.8	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	ENDEVCO 7264C	T25885	2/2/2021	2/2/2022
Upper Spine Y Accelerometer	ENDEVCO 7264CT	AC-P71281	11/9/2020	5/10/2021
Lower Spine Y Accelerometer	ENDEVCO 7264	AC-P64147	11/9/2020	5/10/2021
Upper Thorax Rib Potentiometer	Servo 08CT1-3725	DS-451GFE	11/10/2020	5/11/2021
Middle Thorax Rib Potentiometer	Servo 08TC1-3745	DS-040GFE	11/10/2020	5/11/2021
Lower Thorax Rib Potentiometer	Servo 08TC1-3725	DS-1156GFE	11/9/2020	5/10/2021

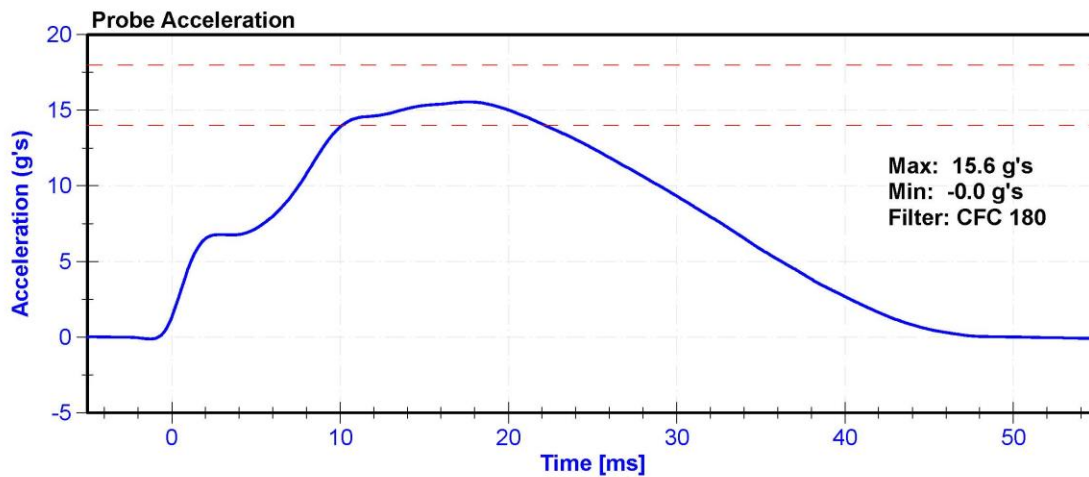

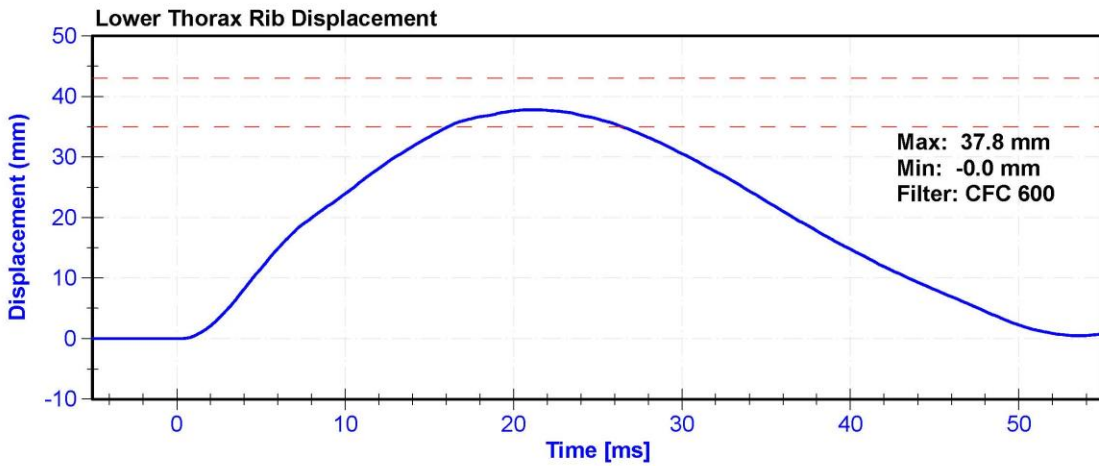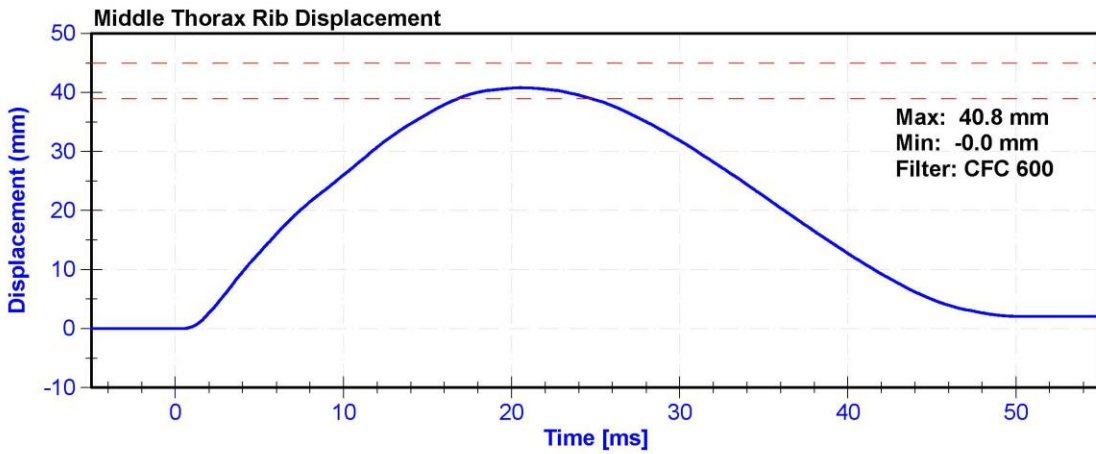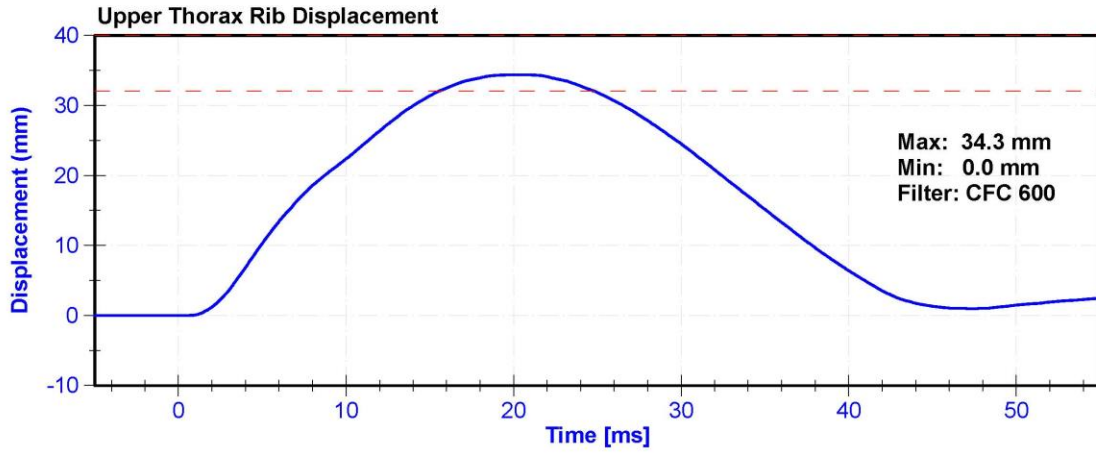

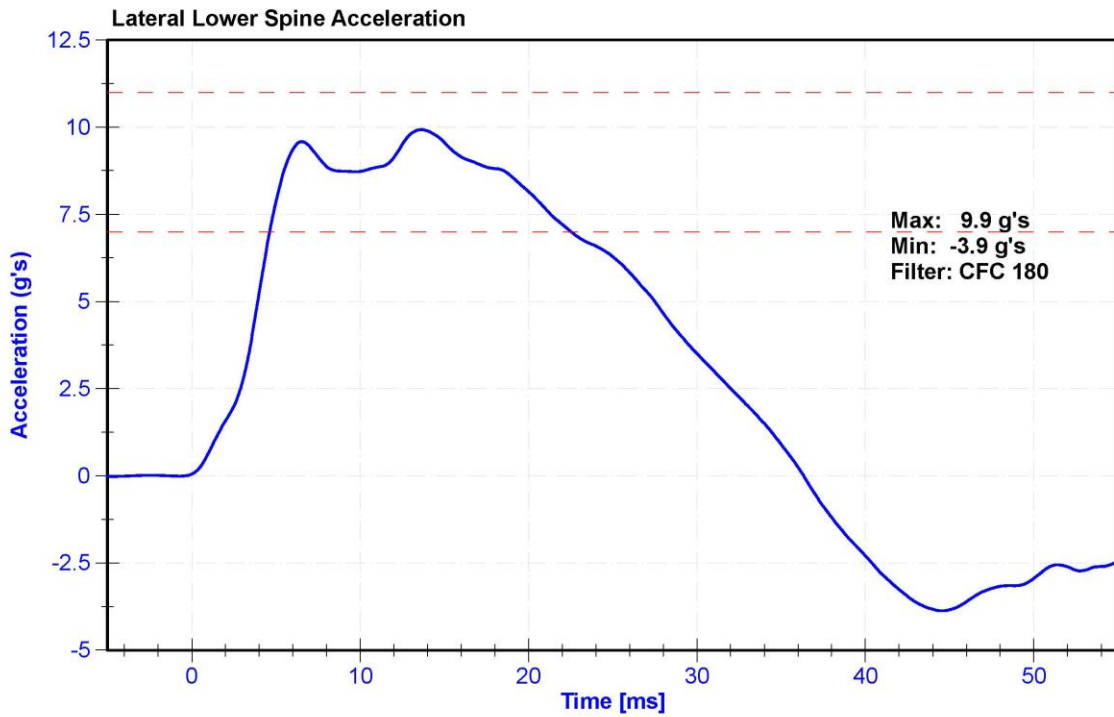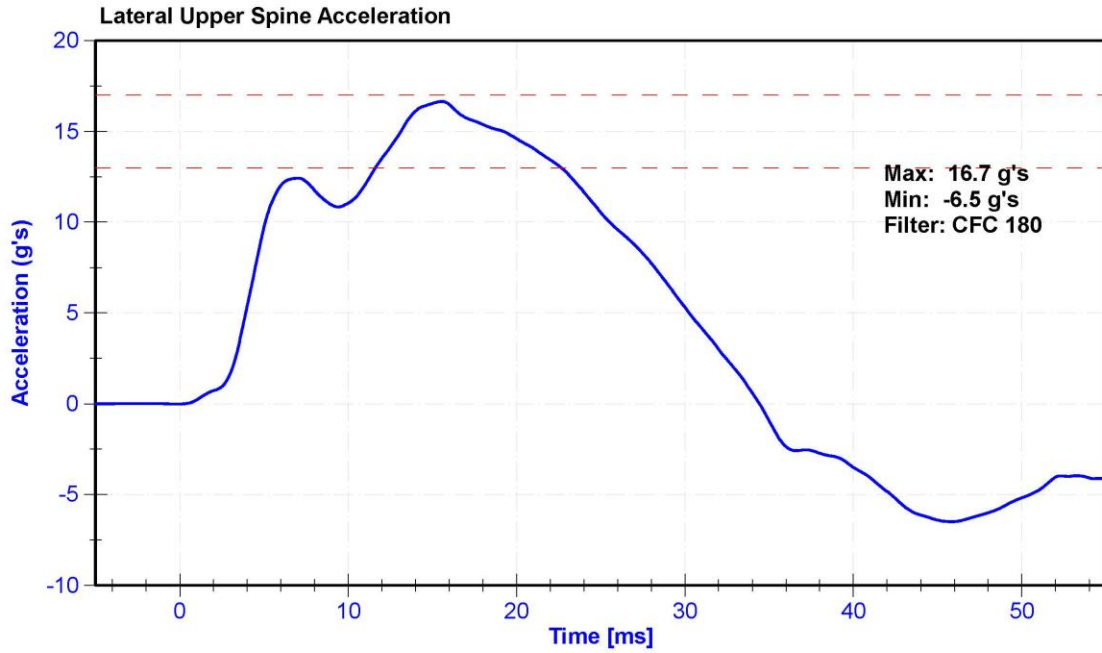


ATD Manufacturer	FTSS	Test Technician	D.Reinhard
ATD Serial Number	300	Laboratory Supervisor	K. Brogan



Results


Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	20.9	Pass
Humidity	10	70	%	29.0	Pass
Velocity	4.2	4.4	m/s	4.33	Pass
Probe Acceleration	12	16	g's	13.5	Pass
Lateral Lower Spine Acceleration	9	14	g's	11.1	Pass
Upper Abdomen Rib Deflection	36	47	mm	40.5	Pass
Lower Abdomen Rib Deflection	33	44	mm	40.9	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Probe Accelerometer	ENDEVCO 7264C	T25885	2/2/2021	2/2/2022
Lower Spine Y Accelerometer	ENDEVCO 7264	AC-P64147	11/9/2020	5/10/2021
Upper Abdomen Rib Potentiometer	Servo 08CT1-3725	DS-308GFE	11/10/2020	5/11/2021
Lower Abdomen Rib Potentiometer	Servo 08CT1-3725	DS-307GFE	11/10/2020	5/11/2021

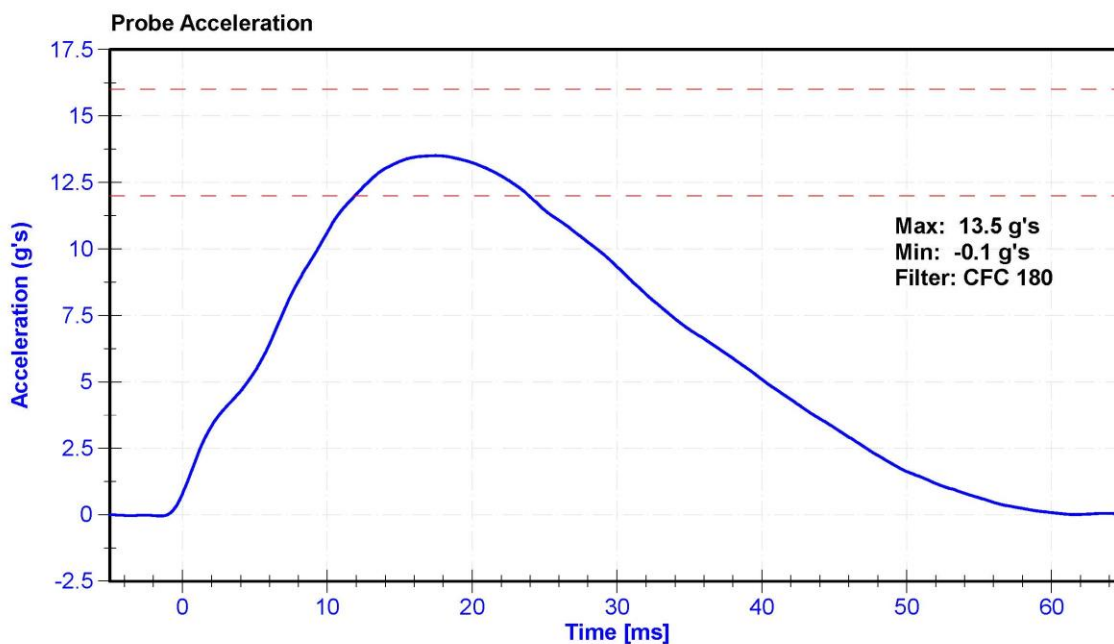

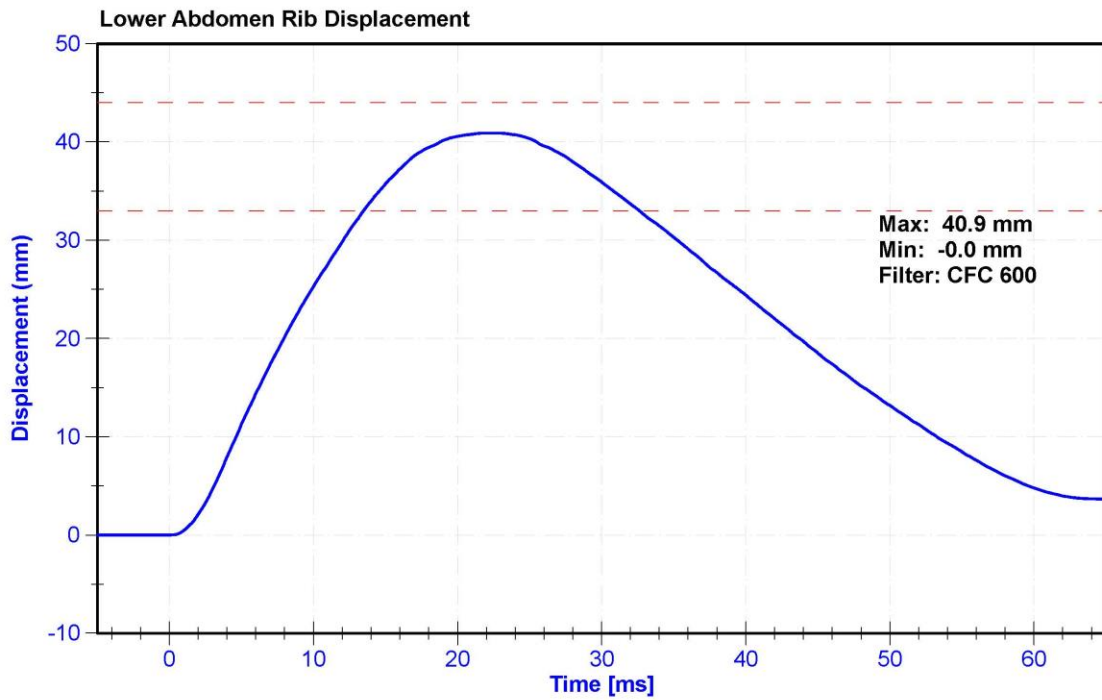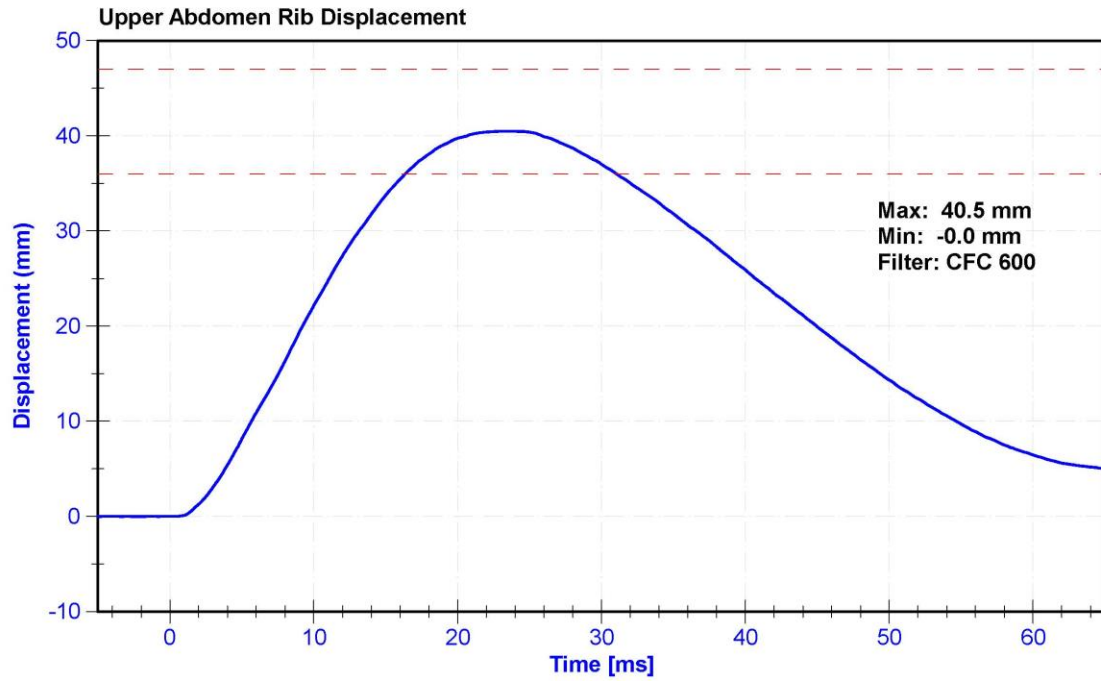

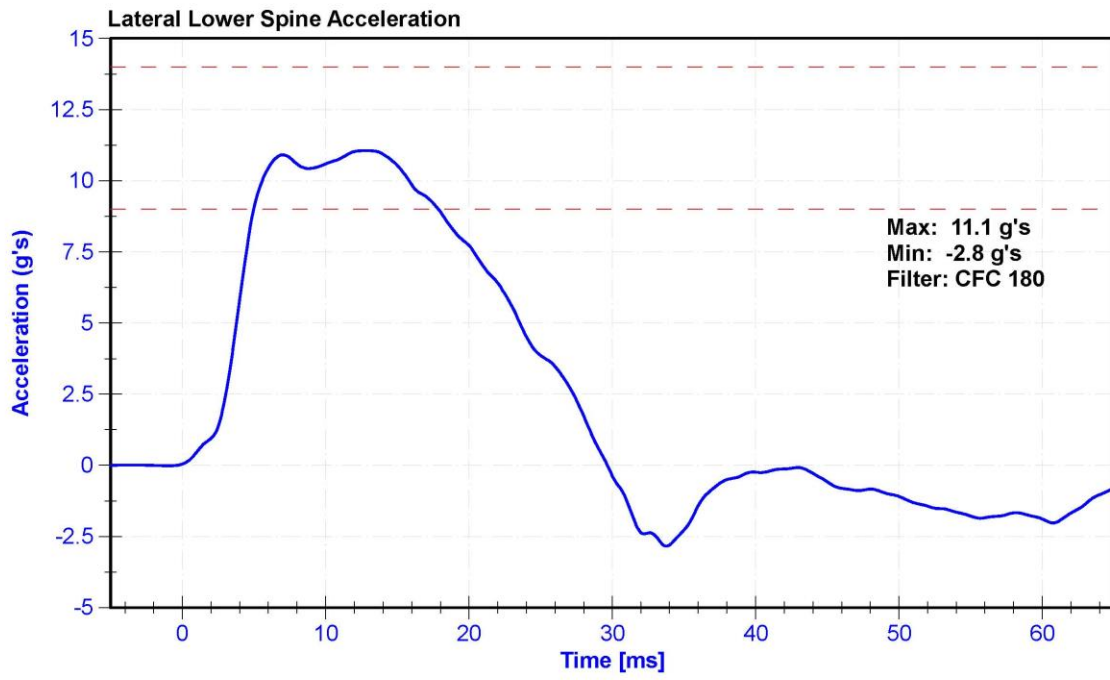


ATD Manufacturer	FTSS	Test Technician	D.Reinhard
ATD Serial Number	300	Laboratory Supervisor	K. Brogan



Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	20.9	Pass
Humidity	10	70	%	29	Pass
Velocity	6.6	6.8	m/s	6.66	Pass
Probe Acceleration	38	47	g's	40.7	Pass
Lateral Pelvis Acceleration after 6ms	34	42	g's	39.1	Pass
Acetabulum Force	3600	4300	N	3846.8	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	ENDEVCO 7264C	T25885	2/2/2021	2/2/2022
Pelvis Y Accelerometer	ENDEVCO 7264C	AC-P51731	11/9/2020	5/10/2021
Acetabulum Load Cell	Denton IF-520	LC-236Fy	3/18/2020	3/18/2021
Certification Plug	SACO	13114	8-5-2021	N/A
Crash Test Plug	SACO	13121	8-5-2019	N/A

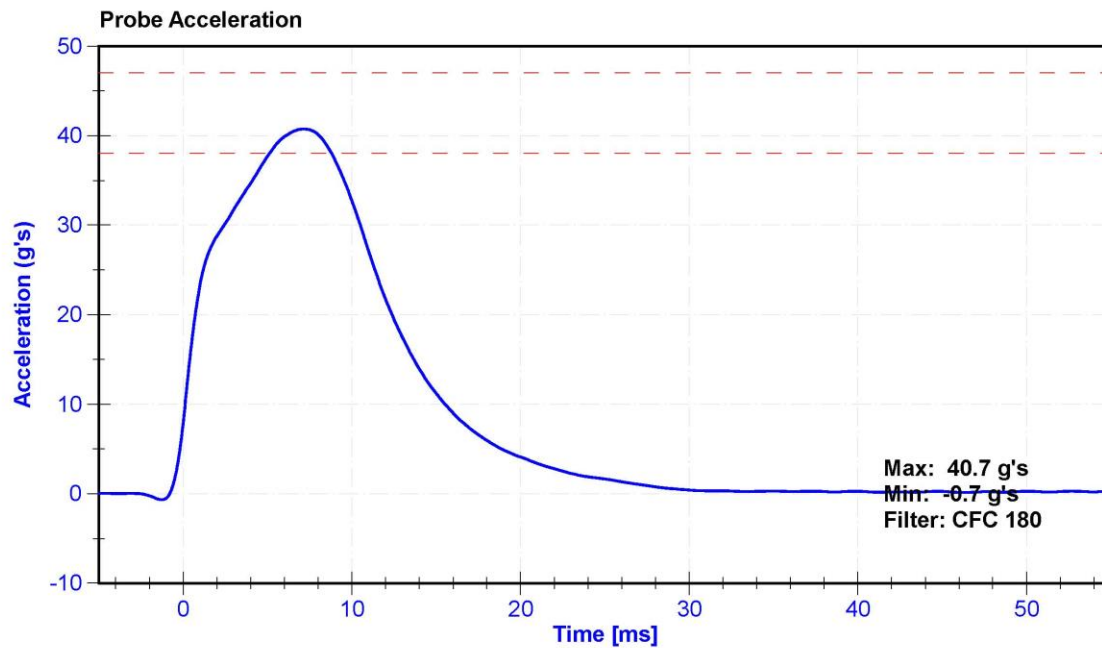

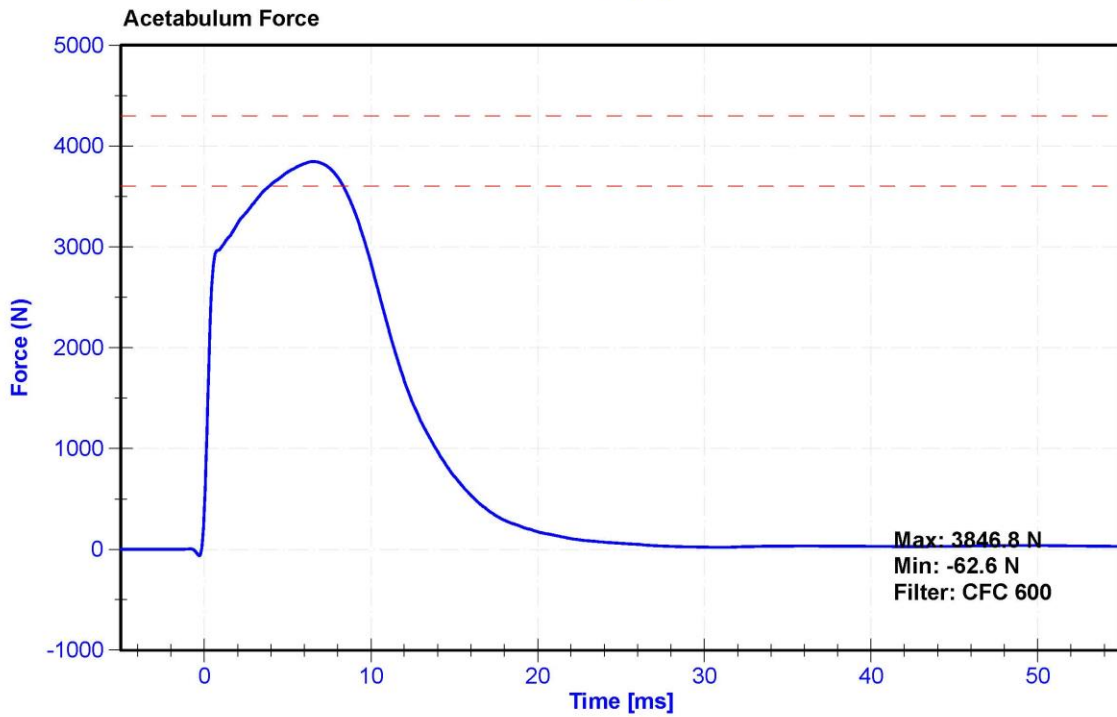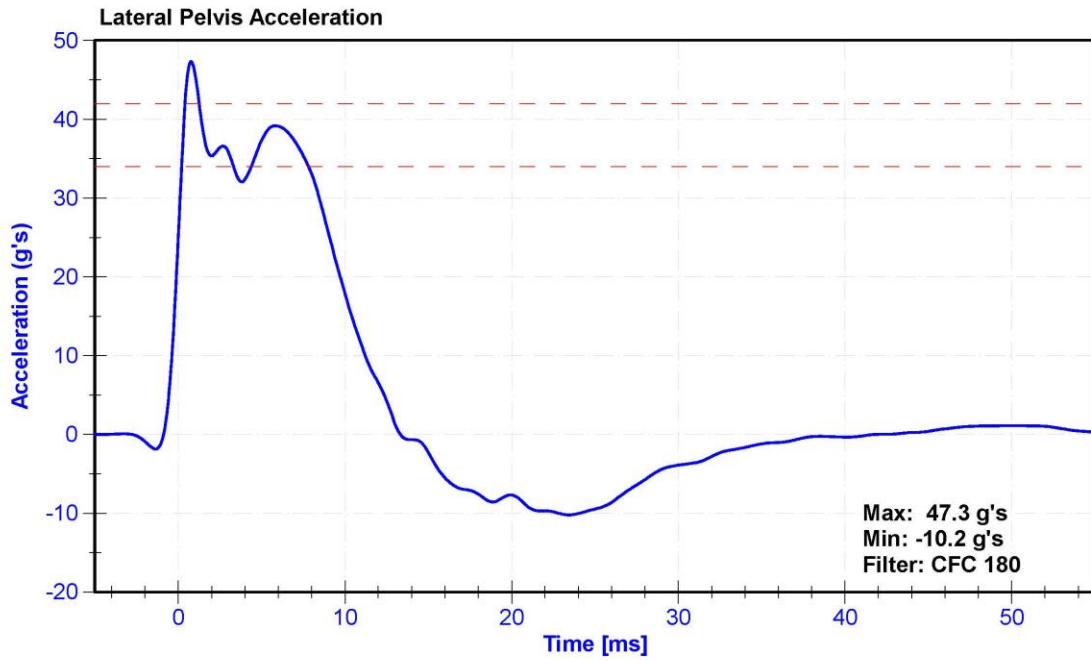



SID-11s Pelvis Plug Certification Test

Plug S/N 13956
Test Number 13430
Report Number 13475
Test Date 5/22/2020 8:42:47 AM


300
3/17/21
Non impact

Force (-N) vs Extension (-mm)

Test Results	Spec Min	Spec Max
Force @ 0.5 mm (N)	50.00	600.00
Force @ 1.5 mm (N)	850.00	1,400.00
Force @ 2.5 mm (N)	1,306.00	1,618.00
Force @ 3.0 mm (N)	1,361.00	1,673.00

Testing Machine STM-20 5965542
Load Cell S/N (F1360947), Units (LBS) 1000
Crosshead Speed (mm / min) or Rate 12.7
Extension or Position Measured by XHD_100 (XHD100)

Notes:

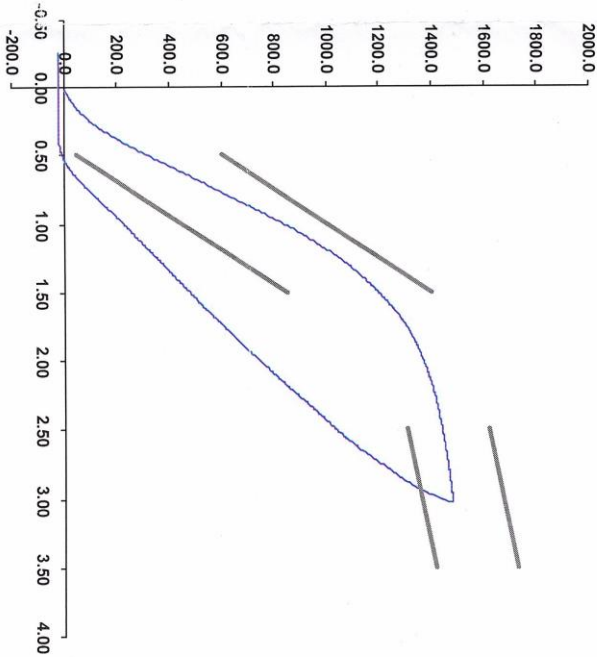

Operator

Part Number 180-4450

Template No 107
SACO Research

22-May-20

By: DC

Date: 5-22-2020

SACO Research 41735 Elm St, #401 Murrieta, CA 92562 Tel: 310-694-2082 FAX



SID-IIs Pelvis Plug Certification Test

Plug S/N 13121
Test Number 10482
Report Number 10518
Test Date 8/5/2019 10:36:01 AM

Test Results	Spec Min	Spec Max
Force @ 0.5 mm (N)	50.00	600.00
Force @ 1.5 mm (N)	850.00	1,400.00
Force @ 2.5 mm (N)	1,306.00	1,618.00
Force @ 3.0 mm (N)	1,361.00	1,673.00

Testing Machine STM-20 5965542
Load Cell S/N (F1350947), Units (LBS) 1000
Crosshead Speed (mm/min) or Rate 12.7
Extension or Position Measured by XHD_100 (XHD100)

Notes:


Operator

Part Number 180-4450

Template No 107 05-Aug-19
SACO Research

By: DC Date: 8/5/2019

SACO Research 41735 Elm St. #401 Murrieta, CA 92562 Tel 310-694-2082 FAX

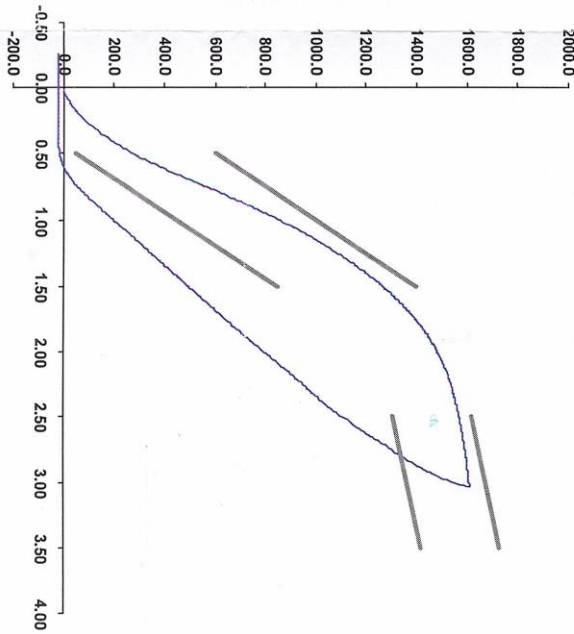

300 Crash
3/17/21




SID-11s Pelvis Plug Certification Test

Plug S/N 13114
Test Number 10475
Report Number 10511
Test Date 8/5/2019 10:22:58 AM

Test Results	Spec Min	Spec Max
Force @ 0.5 mm (N)	50.00	600.00
Force @ 1.5 mm (N)	850.00	1,400.00
Force @ 2.5 mm (N)	1,306.00	1,618.00
Force @ 3.0 mm (N)	1,573.12	1,673.00

Testing Machine STM-20 5965542
 Load Cell S/N (F1350947), Units (LBS) 1000
 Crosshead Speed (mm / min) or Rate 12.7
 Extension or Position Measured by XHD_100 (XHD100)

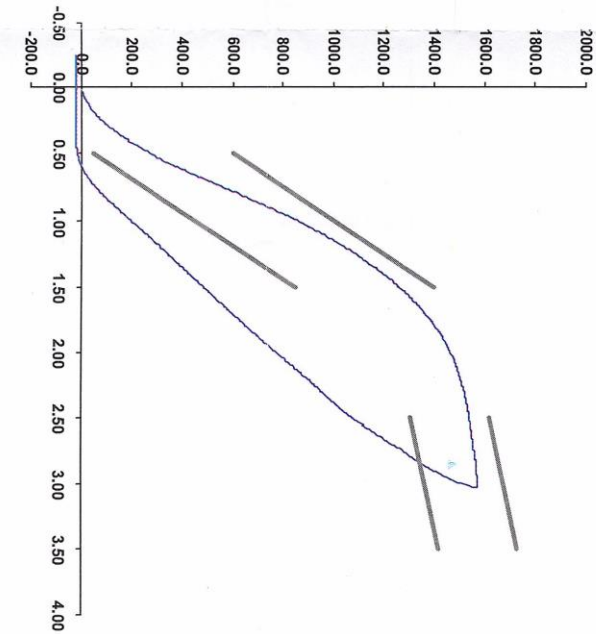

300 Cert 1
3/17/21

Operator
Part Number 130-4450

Template No 107 05-Aug-19
 SACO Research
 By: DC Date: 8/5/2019
 SACO Research 41735 Elm St, #401 Murrieta, CA 92562 Tel 310-694-2082 FAX


ATD Manufacturer	FTSS	Test Technician	K. Brogan
ATD Serial Number	300	Laboratory Supervisor	D.Reinhard



Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	20.9	Pass
Humidity	10	70	%	29.0	Pass
Velocity	4.2	4.4	m/s	4.27	Pass
Probe Acceleration	36	45	g's	40.9	Pass
Lateral Pelvis Acceleration	28	39	g's	33.5	Pass
Iliac Force	4100	5100	N	4895.4	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	ENDEVCO 7264C	T25885	2/2/2021	2/2/2022
Pelvis Y Accelerometer	ENDEVCO 7264C	AC-P51731	11/9/2020	5/10/2021
Iliac Load Cell	DENTON 3228J	LC-279Fy	11/23/2020	11/23/2021

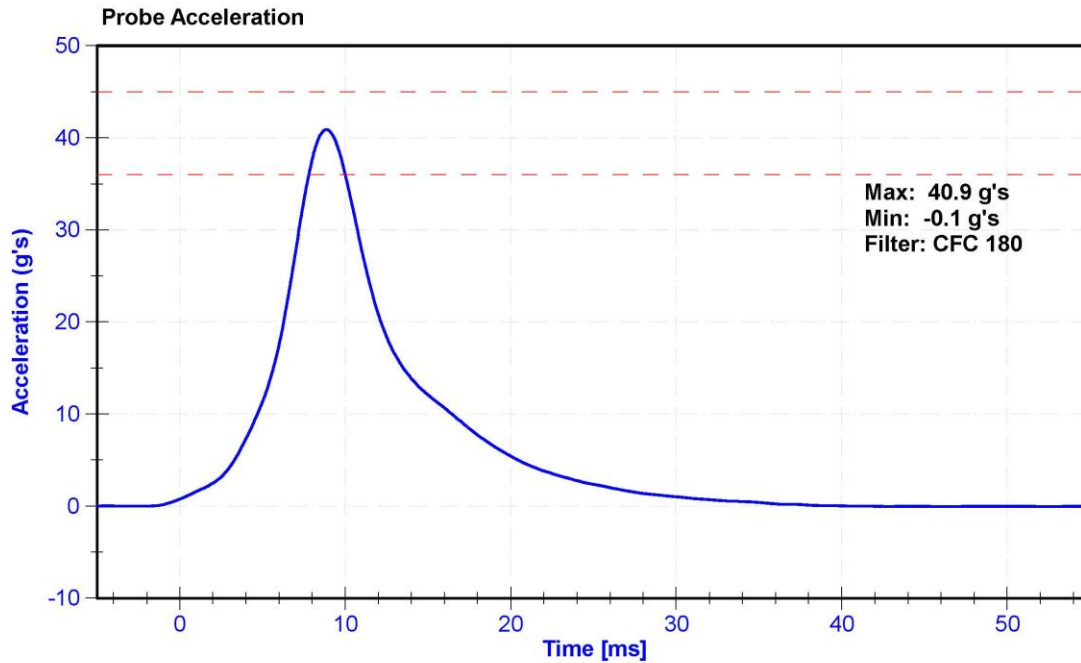

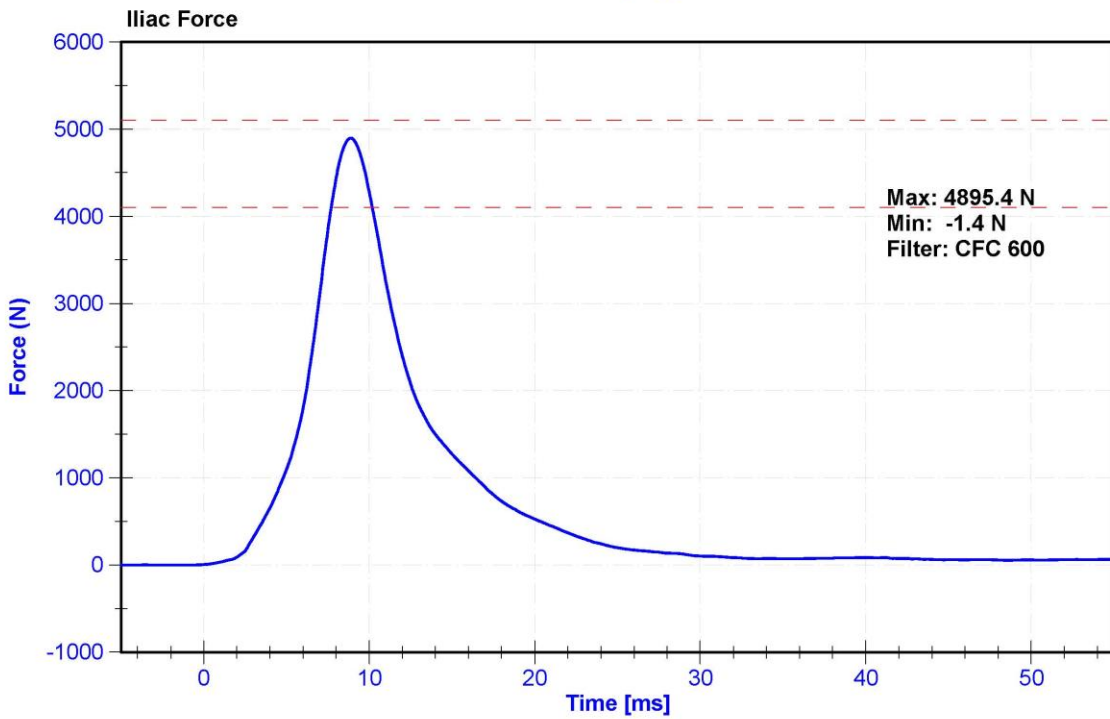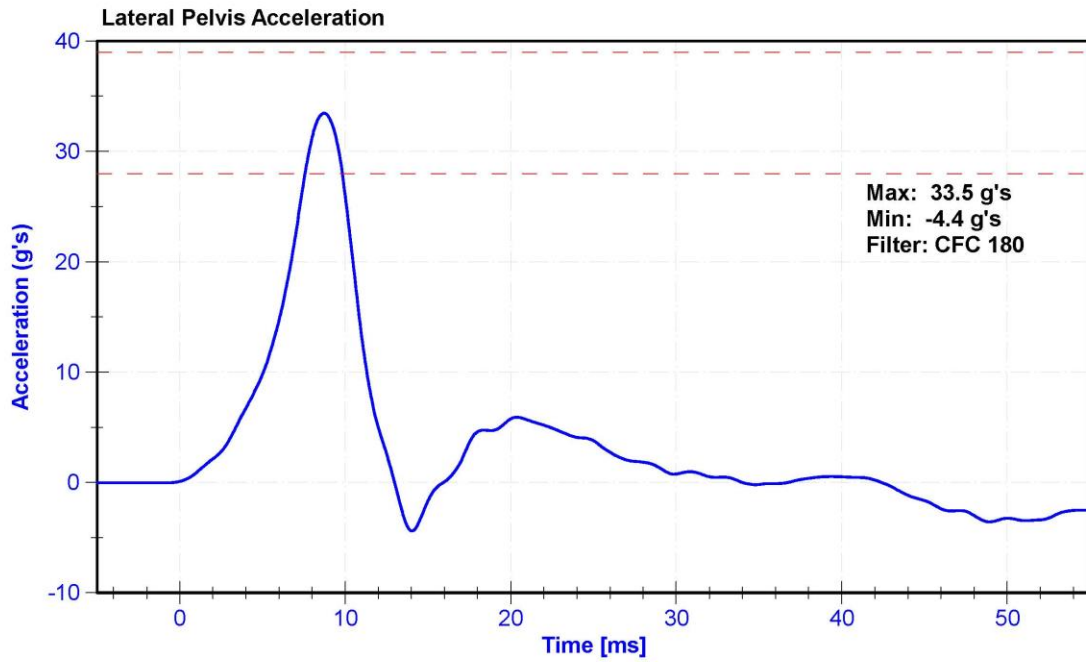

APPENDIX D

TEST EQUIPMENT AND INSTRUMENTATION CALIBRATION DATA

Table 1 – Dummy Instrumentation (ES-2re)

			ES-2re S/N: F033		
			Serial Number	Manufacturer	Calibration Date
Head Accelerometers	Primary	X	AC-P63861	ENDEVCO	11/24/2020
		Y	AC-P49216	ENDEVCO	11/24/2020
		Z	AC-P51303	ENDEVCO	11/24/2020
	Redundant	X	AC-P58868	ENDEVCO	11/24/2020
		Y	AC-P16755	ENDEVCO	11/24/2020
		Z	AC-P52132	ENDEVCO	11/24/2020
Thorax Rib Displacement Potentiometers	Upper	Y	DS-179GFE	Honeywell	11/25/2020
	Middle	Y	DS-185GFE	Honeywell	11/25/2020
	Lower	Y	DS-178GFE	Honeywell	11/25/2020
Abdomen Load Cells	Forward	Y	LC-1509	FTSS	11/10/2020
	Middle	Y	LC-1508	DENTON	11/10/2020
	Rear	Y	LC-1507	DENTON	11/10/2020
Lower Spine Accelerometers (T12)		X	AC-P52009	ENDEVCO	11/24/2020
		Y	AC-P49163	ENDEVCO	11/24/2020
		Z	AC-P52033	ENDEVCO	11/24/2020
Pubic Symphysis Load Cell		Y	LC-464fy	DENTON	7/23/2020

Table 2 – Dummy Instrumentation (SID-IIs)

			SID-IIs S/N: 300			
			Serial Number	Manufacturer	Calibration Date	
Head Accelerometers	Primary	X	AC-P59018	ENDEVCO	11/10/2020	
		Y	AC-P79189	ENDEVCO	11/10/2020	
		Z	AC-P58777	ENDEVCO	11/10/2020	
	Redundant	X	AC-P68057	ENDEVCO	11/10/2020	
		Y	AC-P58986	ENDEVCO	11/10/2020	
		Z	AC-P52025	ENDEVCO	11/10/2020	
Displacement Potentiometers	Thoracic Rib	Upper	Y	DS-451GFE	Servo	11/10/2020
		Middle	Y	DS-040GFE	Servo	11/10/2020
		Lower	Y	DS-1156GFE	Servo	11/9/2020
	Abdominal Rib	Upper	Y	DS-308GFE	Servo	11/10/2020
		Lower	Y	DS-307GFE	Servo	11/10/2020
Lower Spine Accelerometers (T12)		X	AC-P64003	ENDEVCO	11/9/2020	
		Y	AC-P64147	ENDEVCO	11/9/2020	
		Z	AC-P58786	ENDEVCO	11/9/2020	
Acetabulum Load Cell		Y	LC-236Fy	DENTON	3/18/2020	
Iliac Wing Load Cell		Y	LC-279Fy	DENTON	11/23/2020	
Pelvis Plug (struck side)			13941	SACO	5/20/2020	
Pelvis Plug (non-struck side)			13782	SACO	4/7/2020	

Table 3 – Vehicle Instrumentation

Vehicle Instrumentation			Serial Number	Manufacturer	Calibration Date
1	Vehicle Center of Gravity	X	1201-1000_A280187	Measurement Specialties	1/20/2021
	Vehicle Center of Gravity	Y	1201-1000_A370906	Measurement Specialties	11/18/2020
	Vehicle Center of Gravity	Z	1201-1000_A370912	Measurement Specialties	11/19/2020
2	Right Sill at Front Seat	X	1201-1000_A290898	Measurement Specialties	3/4/2021
	Right Sill at Front Seat	Y	1201-1000_A290901	Measurement Specialties	3/4/2021
	Right Sill at Front Seat	Z	1201-1000_A335480	Measurement Specialties	3/4/2021
3	Right Sill at Rear Seat	X	1201-1000_A300131	Measurement Specialties	3/4/2021
	Right Sill at Rear Seat	Y	1201-1000_A301883	Measurement Specialties	3/4/2021
	Right Sill at Rear Seat	Z	1201-1000_A335432	Measurement Specialties	3/4/2021
4	Left Sill at Front Door	Y	1201-1000_A284355	Measurement Specialties	11/13/2020
5	Left Sill at Rear Door	Y	1201-1000_A315916	Measurement Specialties	11/5/2020
6	Left A-Post Lower	Y	1201-1000_A284268	Measurement Specialties	10/21/2020
7	Left A-Post Middle	Y	1201-1000_A335433	Measurement Specialties	10/19/2020
8	Left B-Post Lower	Y	1201-1000_A336635	Measurement Specialties	10/15/2020
9	Left B-Post Middle	Y	1201-1000_A280843	Measurement Specialties	10/7/2020
10	Front Seat Track	Y	1201-1000_A335442	Measurement Specialties	10/21/2020
11	Rear Seat Track or Structure	Y	1201-1000_A315932	Measurement Specialties	12/19/2020
12	Right Rear Occ. Compartment	Y	1201-1000_A374373	Measurement Specialties	2/26/2021
13	Engine Block	X	1201-1000_A315100	Measurement Specialties	10/5/2020
	Engine Block	Y	1201-1000_A370964	Measurement Specialties	11/19/2020
14	Rear Floorpan Above Axle	X	1201-1000_A373239	Measurement Specialties	3/4/2021
	Rear Floorpan Above Axle	Y	1201-1000_A373251	Measurement Specialties	3/4/2021
	Rear Floorpan Above Axle	Z	1201-1000_A374256	Measurement Specialties	3/4/2021

TABLE 4 – MDB Instrumentation

MDB Instrumentation		Serial Number	Manufacturer	Calibration Date
MDB Center of Gravity	X	1201-1000_A315181	Measurement Specialties	10/6/2020
MDB Center of Gravity	Y	1201-1000_A315931	Measurement Specialties	10/7/2020
MDB Center of Gravity	Z	1201-1000_A315085	Measurement Specialties	10/6/2020
Left Frame at Rear Axle Centerline	X	1201-1000_A315983	Measurement Specialties	10/5/2020
Left Frame at Rear Axle Centerline	Y	1201-1000_A290947	Measurement Specialties	10/5/2020