


Exhibit 2



DIMENSIONS

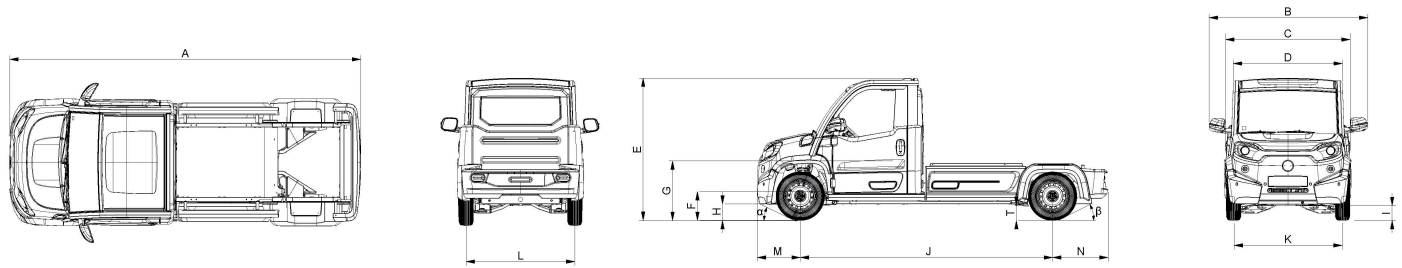

DIMENSIONS	A	B	C	D	E	F	G	H	I	J	K	L	M	N	T	α	β
mm	4 796	2 168	1 704	1 491	1 921	395	812	224	203	3 450	1 485	1 485	587	759	273	25.3°	25.9°

TECHNICAL CHARACTERISTICS

HOMOLOGATION | SEATS

Homologation	N1
Seats	3

PERFORMANCE

Maximum speed	80 km/h
Maximum gradient empty	30 %
Maximum gradient loaded loaded with trailer	20 % 12 %

MASSES

Baseweight (rolling base + doors + towing hook bracket + battery bracket)	1 356 kg
Maximum permissible mass	2 600 kg
Maximum weight of the combination (GCW)	4 300 kg
Tow load capacity for road approved trailers (with brakes)	1 700 kg
Tow load capacity for road approved trailers (without brakes)	up to 750 kg

DIMENSIONS

Overall length	4 793 mm
Cab width	1 730 mm
Overall height	1 900 mm
Wheel base	3 466 mm
Front / Rear track	1454 mm 1465 mm
Front overhang / Rear overhang	618 mm 759 mm
Front clearance angle	20,5°
External turning radius (wall to wall) External turning radius (kerb to kerb)	7 000 mm 6 750 mm

TRANSMISSION

Type	Gear box single ratio and differential
Gear ratio	10.86 : 1.0

CONTROLLER

Type	Curtis
Nominal battery voltage	100 V

ELECTRIC POWERTRAIN

Motor	AC Induction
Type	TRA200-240
Motor voltage	67 V AC
Max peak power	62 kW
Nominal power (S2-30 minutes)	To be defined
Torque @ max peak power	182 Nm @ 3250 rpm
Max torque @ 0 rpm	182 Nm

BRAKES

Main brake type	Dual circuit in X
Emergency brake type	Hydraulic diagonal action
Front brake disc	Ø 280 mm
Front brake caliper	Ø 54 mm
Rear disc brake	Ø 290 mm
Parking brake	Hand actuated

STEERING

Type	Steering rack and electric power assistance
------	---

SUSPENSIONS

Front suspension type	Pseudo McPherson
Travel	166 mm
Rear suspension type	Independent trailing arm
Travel	200 mm

WHEELS AND TYRES

Tyre type	Tubeless
Tyre size	195 65 R16C 104/102
Rim	6Jx16H2 ET50
Recommended pressure (front axle) / (rear axle)	3.2 bar 4.2 bar
Rim material	Stamped steel

BATTERIES	LITHIUM LIFEPO4	NCM
Capacity	28.8 kWh	14.8 kWh
Voltage	96 V	102.2 V
Battery weight	256 kg	130 kg
Charger	6.6 kW	6.6 kW
Vehicle range	up to 153 km	To be defined

OPTIONS & ACCESSORIES

- Tow hitch with trailer plug
- Double DIN Car radio MP3 / Bluetooth
- Roof bar with adaptable options (cannot be combined) :
2 beacon lights + triflash hazard warning triangle, electric

- folding / beacon light
- Reversible air-conditioning unit : heating capacity 5 000 W /
cooling capacity 4 500 W
- Transversal storage units | capacity 400 L

- Electric heater | 5 000 W
- Right and left side guards
- Front radar and rear camera

*Any information or other data provided in this document is non-binding and subject to modification at any time.

