

**NEW CAR ASSESSMENT PROGRAM
LANE DEPARTURE WARNING CONFIRMATION TEST
NCAP-DRI-LDW-22-02**

2022 Ford Escape PHEV FWD

DYNAMIC RESEARCH, INC.

355 Van Ness Avenue, STE 200
Torrance, California 90501



1 June 2022

Final Report

Prepared Under Contract No. DTNH22-14-D-00333

**U.S. DEPARTMENT OF TRANSPORTATION
National Highway Traffic Safety Administration
New Car Assessment Program
1200 New Jersey Avenue, SE
West Building, 4th Floor (NRM-110)
Washington, DC 20590**

Prepared for the Department of Transportation, National Highway Traffic Safety Administration, under Contract No. DTNH22-14-D-00333.

This publication is distributed by the U.S. Department of Transportation, National Highway Traffic Safety Administration, in the interest of information exchange. The opinions, findings, and conclusions expressed in this publication are those of the author(s) and not necessarily those of the Department of Transportation or the National Highway Traffic Safety Administration. The United States Government assumes no liability for its contents or use thereof. If trade or manufacturer's names or products are mentioned, it is only because they are considered essential to the object of the publication and should not be construed as an endorsement. The United States Government does not endorse products of manufacturers.

Prepared By: Stephen Rhim and Anthony Saldana

Senior Engineer

Staff Engineer

Date: 1 June 2022

1. Report No. NCAP-DRI-LDW-22-02	2. Government Accession No.	3. Recipient's Catalog No.	
4. Title and Subtitle Final Report of Lane Departure Warning Confirmation Test of a 2022 Ford Escape PHEV FWD.		5. Report Date 1 June 2022	
		6. Performing Organization Code DRI	
7. Author(s) Stephen Rhim, Senior Engineer Anthony Saldana, Staff Engineer		8. Performing Organization Report No. DRI-TM-21-127	
9. Performing Organization Name and Address Dynamic Research, Inc. 355 Van Ness Ave, STE 200 Torrance, CA 90501		10. Work Unit No.	
		11. Contract or Grant No. DTNH22-14-D-00333	
12. Sponsoring Agency Name and Address U.S. Department of Transportation National Highway Traffic Safety Administration New Car Assessment Program 1200 New Jersey Avenue, SE, West Building, 4th Floor (NRM-110) Washington, DC 20590		13. Type of Report and Period Covered Final Test Report June 2022	
		14. Sponsoring Agency Code NRM-110	
15. Supplementary Notes			
16. Abstract These tests were conducted on the subject 2022 Ford Escape PHEV FWD in accordance with the specifications of the New Car Assessment Program's (NCAP's) most current Test Procedure in docket NHTSA-2006-26555-0135 to confirm the performance of a Lane Departure Warning system. The vehicle passed the requirements of the test for all three lane marking types and for both directions.			
17. Key Words Lane Departure Warning, LDW, New Car Assessment Program, NCAP		18. Distribution Statement Copies of this report are available from the following: NHTSA Technical Reference Division National Highway Traffic Safety Administration 1200 New Jersey Avenue, SE Washington, DC 20590	
19. Security Classif. (of this report) Unclassified	20. Security Classif. (of this page) Unclassified	21. No. of Pages 138	22. Price

TABLE OF CONTENTS

<u>SECTION</u>	<u>PAGE</u>
I. INTRODUCTION	1
II. DATA SHEETS	2
Data Sheet 1: Test Results Summary	3
Data Sheet 2: Vehicle Data	4
Data Sheet 3: Test Conditions	5
Data Sheet 4: Lane Departure Warning System Operation	7
III. TEST PROCEDURES	10
A. Test Procedure Overview	10
B. Lane Delineation Markings	11
C. Test Validity	13
D. Pass/Fail Criteria	14
E. Instrumentation	14
APPENDIX A Photographs	A-1
APPENDIX B Excerpts from Owner's Manual	B-1
APPENDIX C Run Log	C-1
APPENDIX D Time Histories	D-1

Section I

INTRODUCTION

The test procedure is described in detail in the National Highway Traffic Safety Administration (NHTSA) document "LANE DEPARTURE WARNING SYSTEM CONFIRMATION TEST" dated February of 2013 (Docket No. NHTSA-2006-26555-0135). Its purpose is to confirm the performance of LDW systems installed on light vehicles with gross vehicle weight ratings (GVWR) of up to 10,000 lbs. Current LDW technology relies on sensors to recognize a lane delimiting edge line. As such, the test procedures described in the document rely on painted lines, taped lines, or Botts Dots being present on the test course to emulate those found on public roadways. Although it is impossible to predict what technologies could be used by future LDW systems (e.g., magnetic markers, RADAR reflective striping, ultra violet paint, infrared, etc.), it is believed that minor modifications to these procedures, when deemed appropriate, could be used to accommodate the evaluation of alternative or more advanced LDW systems.

The purpose of the testing reported herein was to objectively quantify the performance of a Lane Departure Warning system installed on a 2022 Ford Escape PHEV FWD. This test is part of the New Car Assessment Program to assess Lane Departure Warning Systems sponsored by the National Highway Traffic Safety Administration under Contract No. DTNH22-14-D-00333.

Section II
DATA SHEETS

LANE DEPARTURE WARNING
DATA SHEET 1: TEST RESULTS SUMMARY

(Page 1 of 1)

2022 Ford Escape PHEV FWD

VIN: 1FMCU0KZ8NUA2xxxx

Test start date: 5/25/2022

Test end date: 5/25/2022

Lane Departure Warning setting: N/A

Test 1 – Continuous White Line Left: Pass Right: Pass

Test 2 – Dashed Yellow Line Left: Pass Right: Pass

Test 3 – Botts Dots Left: Pass Right: Pass

Overall: Pass

Notes:

LANE DEPARTURE WARNING
DATA SHEET 2: VEHICLE DATA

(Page 1 of 1)

2022 Ford Escape PHEV FWD

TEST VEHICLE INFORMATION

VIN: 1FMCU0KZ8NUA2xxxx

Body Style: SUV

Color: Agate Black Metallic

Date Received: 5/13/2022

Odometer Reading: 38 mi

DATA FROM VEHICLE'S CERTIFICATON LABEL

Vehicle manufactured by: Ford Motor Co.

Date of manufacture: 03/22

Vehicle Type: MPV

DATA FROM TIRE PLACARD

Tires size as stated on Tire Placard: Front: 225/60R18 100H

Rear: 225/60R18 100H

Recommended cold tire pressure: Front: 230 kPa (33 psi)

Rear: 230 kPa (33 psi)

TIRES

Tire manufacturer and model: Michelin Primacy A/S

Front tire size: 225/60R18 100H

Rear tire size: 225/60R18 100H

Front tire DOT prefix: DOT 03L14 027X

Rear tire DOT prefix: DOT 03L14 027X

LANE DEPARTURE WARNING
DATA SHEET 3: TEST CONDITIONS

(Page 1 of 2)

2022 Ford Escape PHEV FWD

GENERAL INFORMATION

Test start date: 5/25/2022

Test end date: 5/25/2022

AMBIENT CONDITIONS

Air temperature: 37.8 C (100 F)

Wind speed: 0.0 m/s (0.0 mph)

X Wind speed \leq 10 m/s (22 mph)

X Tests were not performed during periods of inclement weather. This includes, but is not limited to, rain, snow, hail, fog, smoke, or ash.

X Tests were conducted during daylight hours with good atmospheric visibility (defined as an absence of fog and the ability to see clearly for more than 5000 meters). The tests were not conducted with the vehicle oriented into the sun during very low sun angle conditions, where the sun is oriented 15 degrees or less from horizontal, and camera "washout" or system inoperability results.

VEHICLE PREPARATION

Verify the following:

All non-consumable fluids at 100% capacity: X

Fuel tank is full: X

Tire pressures are set to manufacturer's recommended cold tire pressure: X

Front: 230 kPa (33 psi)

Rear: 230 kPa (33 psi)

LANE DEPARTURE WARNING
DATA SHEET 3: TEST CONDITIONS

(Page 2 of 2)

2022 Ford Escape PHEV FWD

WEIGHT

Weight of vehicle as tested including driver and instrumentation

Left Front: 573.8 kg (1265 lb)

Right Front: 545.2 kg (1202 lb)

Left Rear: 422.3 kg (931 lb)

Right Rear: 414.6 kg (914 lb)

Total: 1955.9 kg (4312 lb)

LANE DEPARTURE WARNING
DATA SHEET 4: LANE DEPARTURE WARNING SYSTEM OPERATION

(Page 1 of 3)

2022 Ford Escape PHEV FWD

Name of the LDW option, option package, etc.:

Lane-Keeping System/Alert comes standard on the vehicle as part of the Ford Co-Pilot360 package.

Type and location of sensor(s) used:

The LDW system uses a mono camera in the top center of the windshield.

Lane Departure Warning Setting used in test:

N/A

How is the Lane Departure Warning presented to the driver? Warning light
(Check all that apply) Buzzer or auditory alarm
 Vibration
 Other _____

Describe the method by which the driver is alerted. For example, if the warning is a light, where is it located, its color, size, words or symbol, does it flash on and off, etc. If it is a sound, describe if it is a constant beep or a repeated beep. If it is a vibration, describe where it is felt (e.g., pedals, steering wheel), the dominant frequency, (and possibly magnitude), the type of warning (light, auditory, vibration, or combination), etc.

The LDW system alerts the driver with a visual and haptic alert. The visual alert is displayed in the instrument panel and consists of an image of two white lane lines. When LDW activates, the lane line corresponding to the side in which the vehicle crossed turns red. The haptic alert consists of a steering vibration with an approximate frequency of 21 Hz.

LANE DEPARTURE WARNING

DATA SHEET 4: LANE DEPARTURE WARNING SYSTEM OPERATION

(Page 3 of 3)

2022 Ford Escape PHEV FWD

Are there other driving modes or conditions that render LDW inoperable or reduce its effectiveness? Yes
 No

If yes, please provide a full description.

The LDW system may not function or have limited performance under the following conditions.

-In cold and severe weather conditions.

-Rain, snow, and spray.

-Large contrasts in outside lighting.

-If the sensor is blocked.

-If damage occurs in the immediate area surrounding the sensor.

-If vehicle is fitted with a suspension kit not approved by OEM.

Additionally, the system can be temporarily suppressed at any time by the following:

-Quick braking

-Fast acceleration

-Using the direction indicator

-Evasive steering maneuver

-Driving too close to the lane markings

Refer to the owner's manual pages 266-267 shown in Appendix B pages B-2 to B-3 for additional information.

Notes:

Section III

TEST PROCEDURES

A. Test Procedure Overview

Each LDW test involved one of three lane marking types: solid white lines, dashed yellow lines, or Botts Dots. Lane departures were done both to the left and to the right, and each test condition was repeated five times, as shown in Table 1.

Table 1. LDW Test Matrix

Lane Geometry	Line Type	Departure Direction	Number of Trials
Straight	Solid	L	5
		R	5
	Dashed	L	5
		R	5
	Botts Dots	L	5
		R	5

Prior to the start of a test series involving a given lane marking type and departure direction combination, the accuracy of the distance to lane marking measurement was verified. This was accomplished by driving the vehicle to the approximate location at which the lane departure would occur and placing the tire at the lane marking edge of interest (i.e., distance to lane marking = 0). The real-time display of distance to the lane marking was then observed to verify that the measured distance was within the tolerance (5 cm). If the measured distance was found to be greater than the tolerance, the instrumentation setup was checked and corrected, if necessary. If the measured distance was found to be within the tolerance, the instrumentation setup was considered appropriate and the test series was begun.

To begin the maneuver, the vehicle was accelerated from rest to a test speed of 72.4 km/h (45 mph), while being driven in a straight line parallel to the lane marking of interest, with the centerline of the vehicle approximately 1.83 m (6.0 ft) from the lane edge (i.e., such that the vehicle would pass through the center of the start gate). The test speed was achieved at least 60 m (200 ft) before the start gate was reached. Striking any start gate cones was not permitted, and any run in which a cone was struck was considered to be invalid. Also, during the initialization and test phases, the test driver avoided using turn signals and avoided applying any sudden acceleration, sudden steering, or sudden braking, and any use of the turn signals, sudden acceleration, sudden steering, or sudden braking invalidated the test trial.

Data collection began with the vehicle at least 60 m (200 ft) from the start gate, which was configured using a pair of non-reflective, low-contrast color traffic cones. A second set of cones, placed 6 m (20 ft) longitudinally before the start gate, was used to guide the driver into the start gate. The lateral width between the cone pairs was 20 cm (8 in) greater than the width of the vehicle, and the centerline of each pair was laterally offset from the lane marking by 1.8 m (6 ft).

Once the driver passed the gate, the driver manually input sufficient steering to achieve a lane departure with a target lateral velocity of 0.5 m/s with respect to the lane line. As shown in Figure 1, two additional non-reflective cones were used to guide the driver in making this steering maneuver. Throughout the maneuver, the driver modulated the throttle or used cruise control, as appropriate, such that vehicle speed remained at constant speed. The test was considered complete when the vehicle crossed at least 1 m (3.3 ft) over the lane edge boundary.

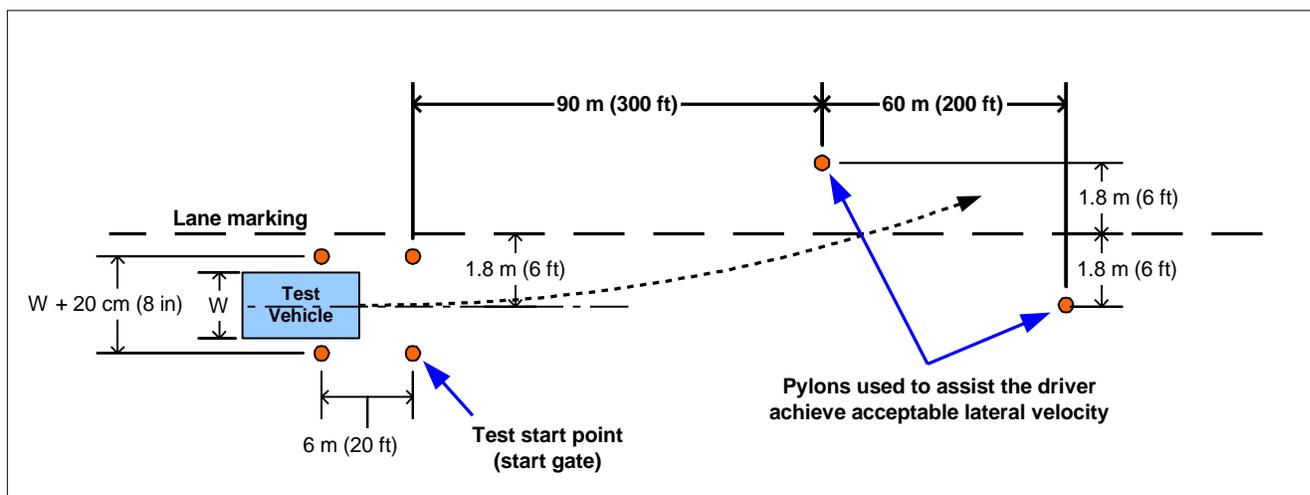


Figure 1. Position of Cones Used to Assist Driver

Data collected included vehicle speed, position, and yaw rate. In addition to cone strikes, vehicle speed and yaw rate data were used to identify invalid runs as described in Section C below. Data from trials where speed or yaw rate were outside of the performance specification were not considered valid.

B. Lane Delineation Markings

The New Car Assessment Program's Test Procedure for the confirmation of a Lane Departure Warning system contains a requirement that all lane markings meet United States Department of Transportation (USDOT) specifications as described in the Manual on Uniform Traffic Control Devices (MUTCD) and be considered in "very good condition".

1. Lane Marker Width

The width of the edge line marker was 10 to 15 cm (4 to 6 in). This is considered to be a normal width for longitudinal pavement markings under Section 3A.05 of the MUTCD.

2. Line Marking Color and Reflectivity

Lane marker color and reflectivity met all applicable standards. These standards include those from the International Commission of Illumination (CIE) for color and the American Society for Testing and Materials (ASTM) on lane marker reflectance.

3. Line Styles

The tests described in this document required the use of three lane line configurations: continuous solid white, discontinuous dashed yellow, and discontinuous with raised pavement markers.

- Continuous White Line

A continuous white line is defined as a white line that runs for the entire length of the test course.

- Dashed Yellow Line

As stated in the MUTCD, and as shown in Figure 2, a discontinuous dashed yellow line is defined as by a series of 3 m (10 ft) broken (dashed) yellow line segments, spaced 9.1 m (30 ft) apart.

- Raised Pavement Marker Line (Botts Dots)

California Standard Plans indicates raised pavement markers are commonly used in lieu of painted strips for marking roads in California. Other states, mainly in the southern part of the United States, rely on them as well. These markers may be white or yellow, depending on the specific application, following the same basic colors of their analogous white and yellow painted lines. Following the California 2006 Standard Plans, three types of raised pavement markings are used to form roadway lines. It is believed that these types of roadway markings are the hardest for an LDW sensor system to process. Type A and Type AY are non-reflective circular domes that are approximately 10 cm (4 in) in diameter and approximately 1.8 cm (0.7 in) high. Type C and D are square markings that are retro reflective in two directions measuring approximately 10 x 10 x 5 cm (4 x 4 x 0.5 in), and Type G and H that are the same as C and D only retro reflective in a single direction.

For the tests described in this document, raised pavement markers were set up following California Standard Plan A20A, Detail 4, as shown in Figure 3. Note that in this figure, the squares are Type D yellow reflectors and the circles are yellow Type AY discs.

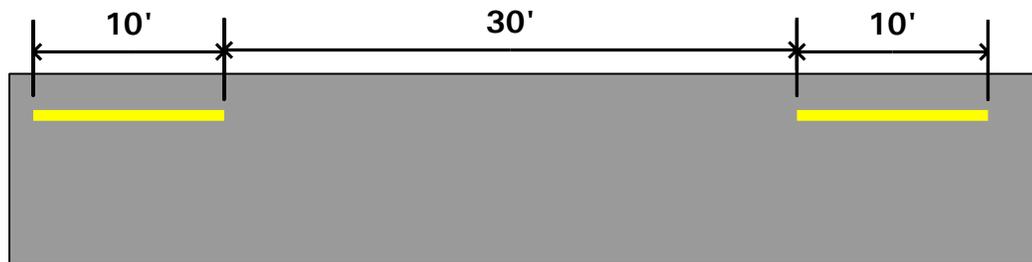


Figure 2. MUTCD Discontinuous Dashed Line Specifications

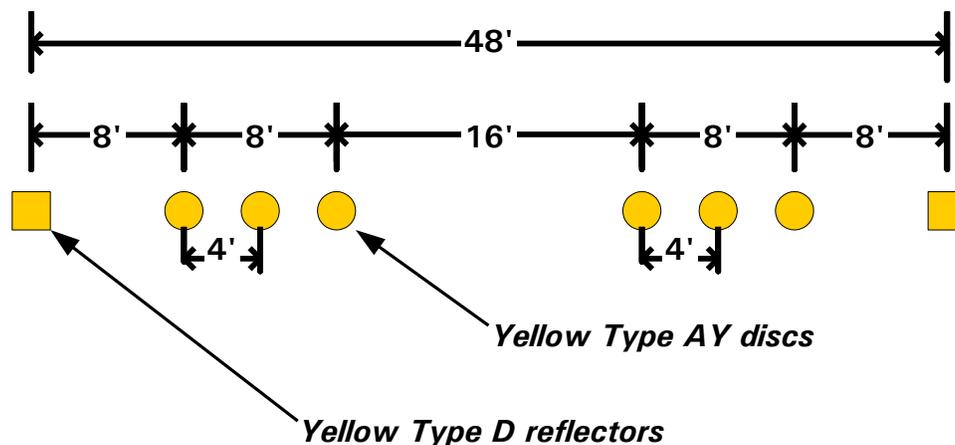


Figure 3. California Standard Plan A20A, Detail 4

C. Test Validity

1. Speed

All LDW tests were conducted at 72.4 km/h (45 mph). Test speed was monitored and a test was considered valid if the test speed remained within ± 2 km/h (± 1.2 mph) of the 72.4 km/h (45 mph) target speed. It was required that the speed must remain within this window from the start of the test until any part of the vehicle crossed a lane line by 1 m (3.3 ft) or more.

2. Lateral Velocity

All tests were conducted with a lateral velocity of 0.1 to 0.6 m/s (0.3 to 2.0 ft/s), measured with respect to the lane line at the time of the alert. To assist the test driver in being able to efficiently establish the target lateral velocity, cones were positioned in the manner shown in Figure 1.

3. Yaw Rate

It was required that the magnitude of the vehicle's yaw rate could not exceed 1.0 deg/sec at any time during lane departure maneuver, from the time the vehicle passes through the start gate to the instant the vehicle has crossed a lane line by 1 m (3.3 ft).

D. Pass/Fail Criteria

The measured test data were used to determine the pass/fail outcome for each trial. The outcome was based on whether the LDW produced an appropriate alert during the maneuver. In the context of this test procedure, a lane departure is said to occur when any part of the two-dimensional polygon used to represent the test vehicle breaches the inboard lane line edge (i.e., the edge of the line close to the vehicle before the departure occurs). In the case of tests performed in this procedure, the front corner of the polygon, defined as the intersection of the center of the front wheels (longitudinally) with the outboard edge of the front tire (laterally), crossed the line edge first. So, for example, if the vehicle departed its lane to the left, the left front corner of the polygon would first breach the lane line edge.

For an individual trial to be considered a "pass":

- Test speed, lateral velocity, and yaw rate validity conditions must be satisfied.
- The LDW alert must not occur when the lateral position of the vehicle is greater than 0.75 m (2.5 ft) from the lane line edge (i.e., prior to the lane departure).
- The LDW alert must occur before the lane departure exceeds 0.3 m (1.0 ft).

For an overall, "Pass" the LDW system must satisfy the pass criteria for 3 of 5 individual trials for each combination of departure direction and lane line type (60%), and pass 20 of the 30 trials overall (66%).

E. Instrumentation

Table 2 lists the sensors, signal conditioning, and data acquisition equipment used for these tests.

Table 2. Test Instrumentation and Equipment

Type	Output	Range	Accuracy, Other Primary Specs	Mfr, Model	Serial Number	Calibration Dates Last Due
Tire Pressure Gauge	Vehicle Tire Pressure	0-100 psi 0-690 kPa	< 1% error between 20 and 100 psi	Omega DPG8001	17042707002	By: DRI Date: 10/5/2021 Due: 10/5/2022
Platform Scales	Vehicle Total, Wheel, and Axle Load	2200 lb/platform	0.1% of reading	Intercomp SW wireless	0410MN20001	By: DRI Date: 2/11/2022 Due: 2/11/2023
Differential Global Positioning System	Position, Velocity	Latitude: ± 90 deg Longitude: ± 180 deg Altitude: 0-18 km Velocity: 0-1000 knots	Horizontal Position: ± 1 cm Vertical Position: ± 2 cm Velocity: 0.05 km/h	Trimble GPS Receiver, 5700 (base station and in-vehicle)	00440100989	N/A
Multi-Axis Inertial Sensing System	Position: Longitudinal, Lateral, and Vertical Accels: Lateral, Longitudinal and Vertical Velocities: Roll, Pitch, Yaw Rates: Roll, Pitch, Yaw Angles	Accels $\pm 10g$, Angular Rate ± 100 deg/s, Angle > 45 deg, Velocity > 200 km/h	Accels .01g, Angular Rate 0.05 deg/s, Angle 0.05 deg, Velocity 0.1 km/h	Oxford Inertial +	2176	By: Oxford Technical Solutions ¹ Date: 6/26/2020 Due: 6/26/2022
Real-Time Calculation of Position and Velocity Relative to Lane Markings	Distance and velocity to lane markings	Lateral Lane Dist: ± 30 m Lateral Lane Velocity: ± 20 m/sec	Lateral Distance to Lane Marking: ± 2 cm Lateral Velocity to Lane Marking: ± 0.02 m/sec	Oxford Technical Solutions (OXTS), RT-Range	97	N/A

¹ Oxford Technical Solutions recommends calibration every two years.

Type	Output	Range	Accuracy, Other Primary Specs	Mfr, Model	Serial Number	Calibration Dates Last Due
Microphone	Sound (to measure time at alert)	Frequency Response: 80 Hz – 20 kHz	Signal-to-noise: 64 dB, 1 kHz at 1 Pa	Audio-Technica AT899	N/A	N/A
Light Sensor	Light intensity (to measure time at alert)	Spectral Bandwidth: 440-800 nm	Rise time < 10 msec	DRI designed and developed Light Sensor	N/A	N/A
Coordinate Measurement Machine	Inertial Sensing System Coordinates	0-8 ft 0-2.4 m	±.0020 in. ±.051 mm (Single point articulation accuracy)	Faro Arm, Fusion	UO8-05-08-06636	By: DRI Date: 1/6/2022 Due: 1/6/2023
Type	Description			Mfr, Model	Serial Number	
Data Acquisition System	Data acquisition is achieved using a dSPACE MicroAutoBox II Data from the Oxford IMU, including Longitudinal, Lateral, and Vertical Acceleration, Roll, Yaw, and Pitch Rate, Forward and Lateral Velocity, Roll and Pitch Angle are sent over Ethernet to the MicroAutoBox. The Oxford IMUs are calibrated per the manufacturer's recommended schedule (listed above).			D-Space Micro-Autobox II 1401/1513		
				Base Board	549068	
				I/O Board	588523	

For systems that implement auditory or haptic alerts, part of the pre-test instrumentation verification process is to determine the tonal frequency of the auditory warning or the vibration frequency of the tactile warning through use of the PSD (Power Spectral Density) function in Matlab. This is accomplished in order to identify the center frequency around which a band-pass filter is applied to subsequent auditory or tactile warning data so that the beginning of such warnings can be programmatically determined. The band-pass filter used for these warning signal types is a phaseless, forward-reverse pass, elliptical (Cauer) digital filter, with filter parameters as listed in Table 3.

Table 3. Auditory and Tactile Warning Filter Parameters

Warning Type	Filter Order	Peak-to-Peak Ripple	Minimum Stop Band Attenuation	Passband Frequency Range
Auditory	5 th	3 dB	60 dB	Identified Center Frequency \pm 5%
Tactile	5 th	3 dB	60 dB	Identified Center Frequency \pm 20%

APPENDIX A

Photographs

LIST OF FIGURES

		Page
Figure A1.	Front View of Subject Vehicle.....	A-3
Figure A2.	Rear View of Subject Vehicle	A-4
Figure A3.	Window Sticker (Monroney Label).....	A-5
Figure A4.	Vehicle Certification Label	A-6
Figure A5.	Tire Placard	A-7
Figure A6.	DGPS, Inertial Measurement Unit, and MicroAutoBox Installed in Subject Vehicle	A-8
Figure A7.	Computer Installed in Subject Vehicle	A-9
Figure A8.	Sensors for Detecting Visual and Haptic Alert.....	A-10
Figure A9.	Visual Alert	A-11
Figure A10.	LDW System On/Off Button.....	A-12



Figure A1. Front View of Subject Vehicle



Figure A2. Rear View of Subject Vehicle



Go Further
ford.com

VEHICLE DESCRIPTION

ESCAPE FWD

2022 ESCAPE SEL PHEV FWD
106.7" WHEELBASE
2.5L I-VCT ATK 1-4 HYB ENG
ECVT TRANSMISSION

NU A2

EXTERIOR
AGATE BLACK METALLIC
INTERIOR
EBONY ACTIVEV TRIM SEATS

STANDARD EQUIPMENT INCLUDED AT NO EXTRA CHARGE

EXTERIOR

- ACTIVE GRILLE SHUTTERS
- DUAL EXHAUST CHROME TIPS
- ELECTR FUEL DOOR RELEASE
- FOG LAMPS
- HEADLAMP COURTESY DELAY
- HEADLAMPS - AUTO HALOGEN
- HEADLAMPS - AUTO HIGH BEAM
- LED SIGNATURE LIGHTING
- MIRRORS-HTD/POWER GLASS, MANUAL FOLD
- PRIVACY GLASS - REAR DOORS
- REAR INT WIPER/WASH/DFRST
- REAR SPOILER
- TAILLAMPS-LED

INTERIOR

- 1 TOUCH UP/DOWN FRNT/RR WIN
- DUAL ILLUM VIS VANITY MIRR
- DUAL ZONE AUTO CLIMATE CTL
- HTD DRVR
- FRNT PASS SEATS
- ILLUMINATED ENTRY SYSTEM
- MAP POCKETS-PASSENGER
- POWERPOINTS - 12V
- REAR SEAT CUPHOLDERS AND ARMREST
- ROTARY GEAR SHIFT DIAL
- SPLIT FOLD/SLIDE REAR SEAT
- STR WHL-HTD & PREMIUM WRPD
- USB A (1) AND C (1)

FUNCTIONAL

- BLIS W/CROSS-TRAFFIC ALERT
- FORD CO-PILOT360™
- FORDPASS™ CONNECT 4GWI-FI HOTSPOT TELEMATICS MODEM
- INTELLIGENT ACCESS W/PUSH BUTTON START
- LANE-KEEPING SYSTEM/ALERT
- PEDESTRIAN ALERT SOUNDER
- PRE-COLLISION ASSIST W/AEB
- REAR VIEW CAMERA
- REFRESH5
- REVERSE SENSING SYSTEM
- SECURICODE KEYLESS KEYPAD
- SIRIUSXM® - SVC N/A AK&HI
- SYNCS® 8" SCR N W/APPLINK®

SAFETY/SECURITY

- ADVANCETRAC™ WITH RSC®
- AIRBAG - DRIVER KNEE
- AIRBAGS - DUAL STAGE FRONT
- AIRBAGS - FRONT SEAT MOUNTED SIDE IMPACT
- AIRBAGS - SAFETY CANOPY®
- LATCH CHILD SAFETY SYSTEM
- PERSONAL SAFETY SYSTEM™
- SOS POST-CRASH ALERT SYS™
- TIRE PRESSURE MONIT SYS

WARRANTY

- 3YR/36,000 BUMPER / BUMPER
- 5YR/60,000 ROADSIDE ASSIST
- 6YR/100,000 HYBRID UMIQUE COMPONENTS

INCLUDED ON THIS VEHICLE EQUIPMENT GROUP 625A (MSRP)

OPTIONAL EQUIPMENT/OTHER

.18" MACHINED EBONY ALUM WHL	
.225/60R18 100H A/S BSW TIRES	
PANORAMIC VISTA ROOF	1,595.00
FLR LINERS FR-RR W/O CRPT MTS	160.00
MINI SPARE WHEEL/TIRE	110.00
FORD CO-PILOT360 ASSIST+	995.00
.ADP CRZ CTRL W/STOP N GO SEL TECHNOLOGY PACKAGE	1,250.00
.POWER LIFTGATE W/HANDS FREE B&O SOUND SYSTEM, 10-SPK MEMORY PACKAGE	
.WIRELESS CHARGING	
.10-WAY POWER DRIVER SEAT	
FRONT LICENSE PLATE BRACKET	NO CHARGE

PRICE INFORMATION (MSRP)

BASE PRICE \$36,675.00

TOTAL OPTIONS/OTHER 4,110.00

TOTAL VEHICLE & OPTIONS/OTHER DESTINATION & DELIVERY 40,785.00 1,245.00

SOLD TO 71A 040

RAMP ONE CH27

SHIP TO (IF OTHER THAN SOLD TO)

RAMP TWO

SHIP THROUGH

FINAL ASSEMBLY PLANT LOUISVILLE

METHOD OF TRANSP. CONVOY

ITEM # 71-1668 O/T 2

TOTAL MSRP \$42,030.00

Whether you decide to lease or finance your vehicle, you'll find the choices that are right for you. See your dealer for details or visit www.ford.com/finance.

NC172 N RB 2X 230 004362 03 17 22

EPA DOT Fuel Economy and Environment

Small SUVs range from 14 to 129 MPG. The best vehicle rates 142 MPG.

Electricity + Gasoline
Charge Time: 3.5 hours (240V)

105 MPG_e
combined city/highway

Gasoline Only

40 MPG
combined city/highway

2.5 gallons per 100 miles

You save \$3,000 in fuel costs over 5 years compared to the average new vehicle.

Annual fuel cost \$700

Fuel Economy & Greenhouse Gas Rating (tailpipe only)

10 Best

Smog Rating (tailpipe only)

7 Best

This vehicle emits .77 grams CO₂ per mile. The best emits 0 grams per mile (tailpipe only). Producing and distributing fuel and electricity also create emissions; learn more at fuelconomy.gov.

Actual results will vary for many reasons, including driving conditions and how you drive and maintain your vehicle. The average new vehicle gets 27 MPG and costs \$6,500 to fuel over 5 years. Cost estimates are based on 15,000 miles per year at \$2.35 per gallon and \$1.15 per kW-hr. This is a dual fueled automobile. MPGe is miles per gasoline gallon equivalent. Vehicle emissions are a significant cause of climate change and smog.

fuelconomy.gov
Calculate personalized estimates and compare vehicles

GOVERNMENT 5-STAR SAFETY RATINGS

Overall Vehicle Score Not Rated
Based on the combined ratings of frontal, side and rollover. Should ONLY be compared to other vehicles of similar size and weight.

Frontal Crash	Driver Passenger	Not Rated
----------------------	-------------------------	------------------

Based on the risk of injury in a frontal impact. Should ONLY be compared to other vehicles of similar size and weight.

Side Crash	Front seat Rear seat	Not Rated
-------------------	-----------------------------	------------------

Based on the risk of injury in a side impact.

Rollover	Not Rated
-----------------	------------------

Based on the risk of rollover in a single-vehicle crash.

Star ratings range from 1 to 5 stars (★★★★★), with 5 being the highest. Source: National Highway Traffic Safety Administration (NHTSA). www.safercar.gov or 1-888-327-4236

1FMCU0KZ8NUA2



WARNING: Operating, servicing and maintaining a passenger vehicle, pickup truck, van, or off-road vehicle can expose you to chemicals including engine exhaust, carbon monoxide, phthalates, and lead, which are known to the State of California to cause cancer and birth defects or other reproductive harm. To minimize exposure, avoid breathing exhaust, do not idle the engine except as necessary, service your vehicle in a well-ventilated area and wear gloves or wash your hands frequently when servicing your vehicle. For more information go to www.P65Warnings.ca.gov/passenger-vehicle.

SCAN QR TEXT: 1FNUA2588 TO #8085

May 8 Data rates may apply. Text HELP for help.



www.ford.com/help/privacy-187194

Figure A3. Window Sticker (Monroney Label)

MFD. BY FORD MOTOR CO.
FRONT GAWR: 1175 KG (2590 LB)
WITH 225/60R18 100H
18x7.5J

DATE: 03/22

GVWR: 2232 KG (4920 LB)

TIRES
RIMS

REAR GAWR: 1093 KG (2410 LB)
WITH 225/60R18 100H
18x7.5J

TIRES
RIMS

AT 230 kPa/ 33 PSI COLD

AT 230 kPa/ 33 PSI COLD

THIS VEHICLE CONFORMS TO ALL APPLICABLE FEDERAL MOTOR VEHICLE SAFETY AND THEFT PREVENTION STANDARDS IN EFFECT ON THE DATE OF MANUFACTURE SHOWN ABOVE.

VIN: 1FMCU0KZ8NUA2

TYPE: MPV



EXT PNT: UM

RC: 71 DSO:

WB	INT TR	TP/PS	R	AXLE	TR	SPR
106	6H		2	91	5	CCCC

F0045
T0051

1202203241109

ULC

▽ 5U5A-3520472-AA

Figure A4. Vehicle Certification Label



TIRE AND LOADING INFORMATION

SEATING CAPACITY TOTAL : 5 FRONT: 2 REAR: 3

The combined weight of occupants : 377 kg or 832 lbs.
and cargo should never exceed :

▽ 5U5A-1532-AA (TLU) FoMoCo

TIRE	SIZE	COLD TIRE PRESSURE
FRONT	225/60R18 100H	230 KPA, 33 PSI
REAR	225/60R18 100H	230 KPA, 33 PSI
SPARE	T155/70D17 110M	420 KPA, 60 PSI

**SEE OWNERS
MANUAL FOR
ADDITIONAL
INFORMATION**

1FMCU0KZ8NUA2



Figure A5. Tire Placard

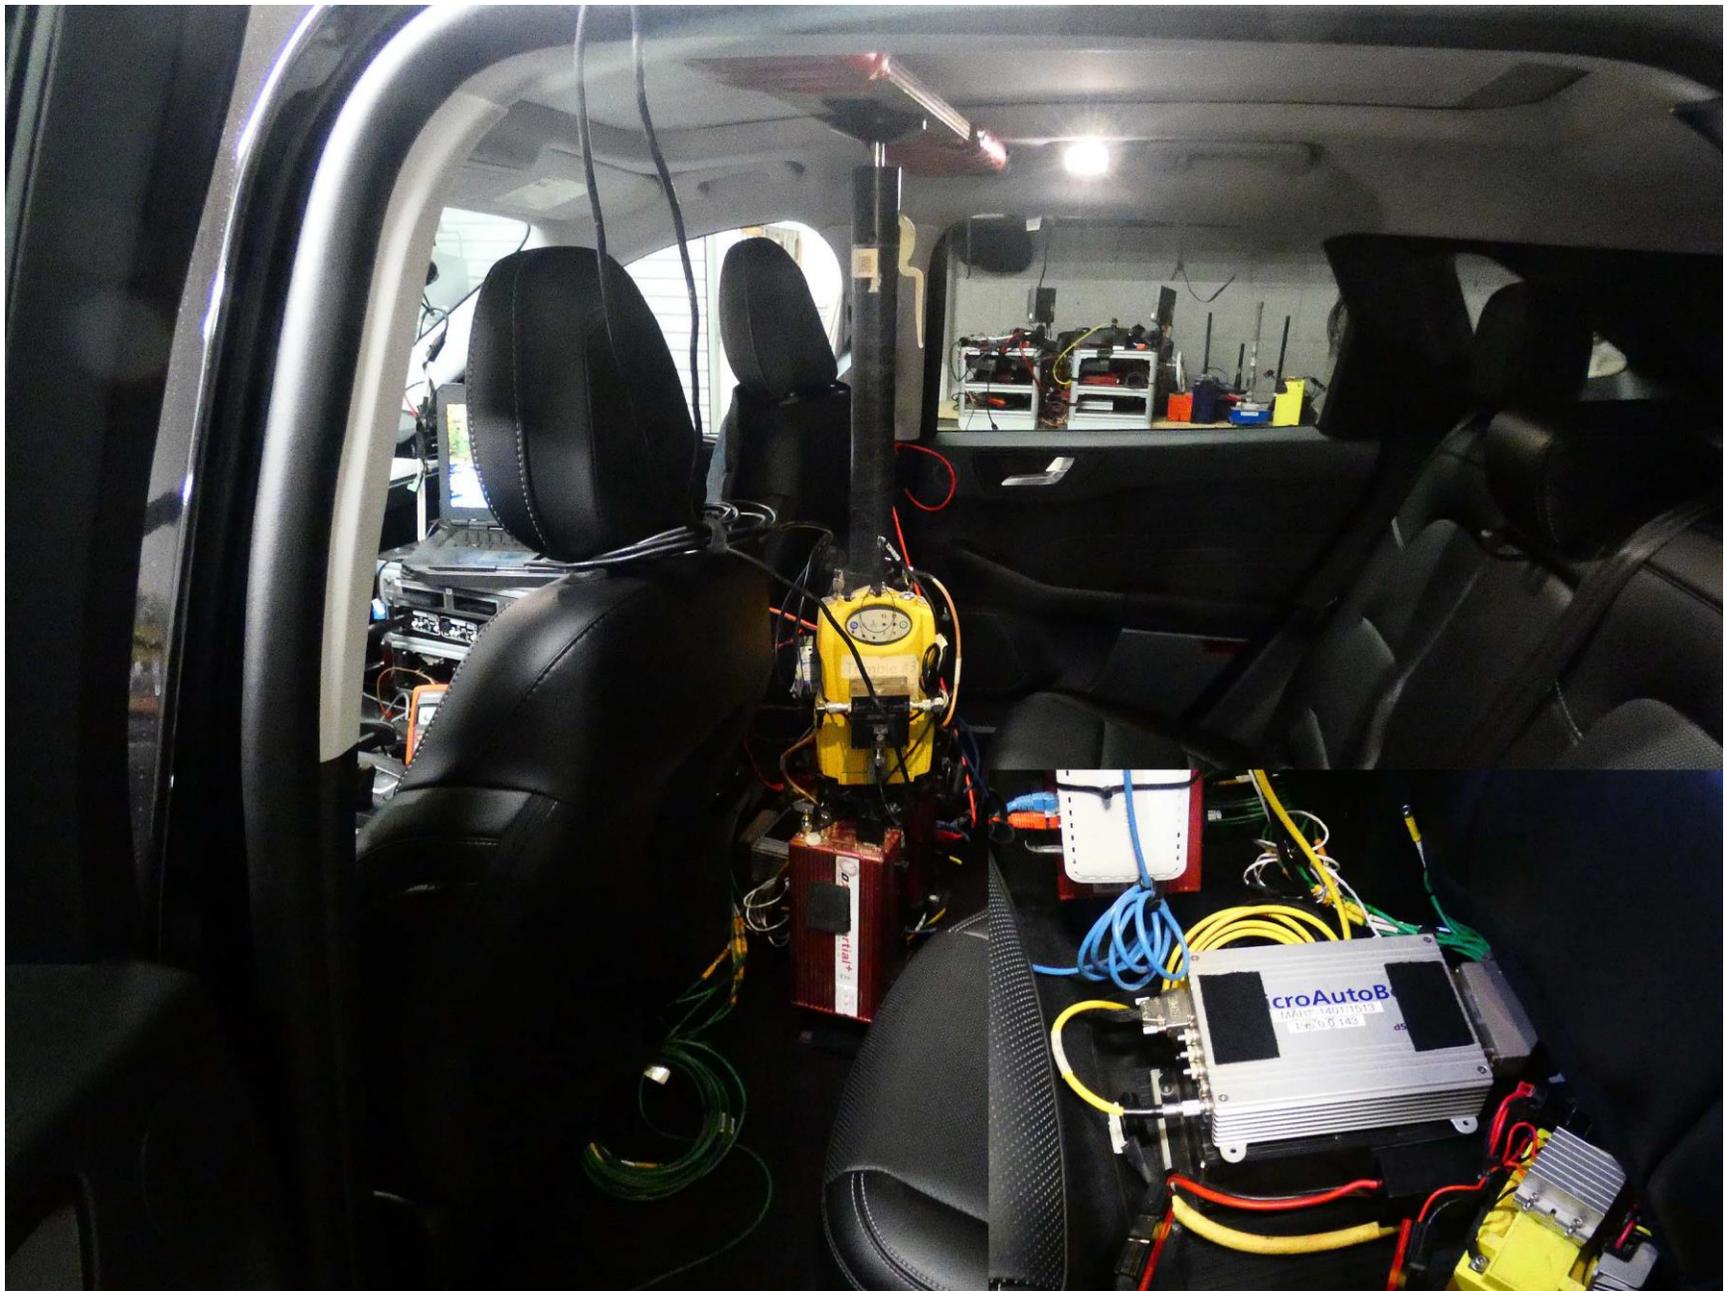


Figure A6. DGPS, Inertial Measurement Unit, and MicroAutoBox Installed in Subject Vehicle



Figure A7. Computer Installed in Subject Vehicle



Figure A8. Sensors for Detecting Visual and Haptic Alert



Figure A9. Visual Alert



Figure A10. LDW System On/Off Button

APPENDIX B

Excerpts from Owner's Manual

Lane Keeping System

WHAT IS THE LANE KEEPING SYSTEM

The lane keeping system alerts you by providing temporary steering assistance or steering wheel vibration when it detects an unintended lane departure.

HOW DOES THE LANE KEEPING SYSTEM WORK

The lane keeping system uses a forward looking camera mounted on the windshield to monitor vehicle movement within the travel lane.

When the camera detects a drift out of the travel lane, the lane keeping system alerts the driver by vibrating the steering wheel, or aids the driver by providing a small steering input to move the vehicle back into the travel lane.

The driver can select one of three modes:

- Alert (If Equipped)
- Aid
- Alert + Aid

LANE KEEPING SYSTEM PRECAUTIONS

 **WARNING:** You are responsible for controlling your vehicle at all times. The system is designed to be an aid and does not relieve you of your responsibility to drive with due care and attention. Failure to follow this instruction could result in the loss of control of your vehicle, personal injury or death.

 **WARNING:** The system will not operate if the sensor cannot track the road lane markings.

 **WARNING:** The sensor may incorrectly track lane markings as other structures or objects. This can result in a false or missed warning.

 **WARNING:** In cold and severe weather conditions the system may not function. Rain, snow and spray can all limit sensor performance.

 **WARNING:** The system may not operate properly if the sensor is blocked. Keep the windshield free from obstruction.

 **WARNING:** If damage occurs in the immediate area surrounding the sensor, have your vehicle checked as soon as possible.

 **WARNING:** The system may not correctly operate if your vehicle is fitted with a suspension kit not approved by US.

 **WARNING:** Large contrasts in outside lighting can limit sensor performance.

LANE KEEPING SYSTEM LIMITATIONS

The lane keeping system only operates when the vehicle speed is greater than 40 mph (64 km/h).

The system works when the camera can detect at least one lane marking.

The lane keeping system may not correctly operate in any of the following conditions:

- The lane keeping system does not detect at least one lane marking.
- You switch the turn signal on.

Lane Keeping System

- You apply direct steering, accelerate fast or brake hard.
- The vehicle speed is less than 40 mph (64 km/h).
- The anti-lock brake, stability control or traction control system activates.
- The lane is too narrow.
- Something is obscuring the camera or it is unable to detect the lane markings due to environment, traffic or vehicle conditions.

The lane keeping system may not correct lane positioning in any of the following conditions:

- High winds.
- Uneven road surfaces.
- Heavy or uneven loads.
- Incorrect tire pressure.

SWITCHING THE LANE KEEPING SYSTEM ON AND OFF



To activate the lane keeping system, press the button on the steering wheel.

To deactivate the lane keeping system, press the button again.

Note: When switching the system on or off a message appears in the information and entertainment display to show the status.

Note: The system stores the on or off setting until manually changed, unless it detects a MyKey™. If the system detects a MyKey™, it defaults to the last setting for that MyKey™.

Note: If the system detects a MyKey™, pressing the button does not affect the on or off status of the system. You can only change the mode and intensity settings.

SWITCHING THE LANE KEEPING SYSTEM MODE

The lane keeping system has different settings that you can view or adjust using the information display.

The system stores the last known selection for each of these settings. You do not need to readjust your settings each time you switch on the system.

To change the lane keeping system mode, use the touchscreen:

1. Press **Settings** on the touchscreen.
2. Press **Driver Assistance**.
3. Press **Lane-Keeping System**.
4. Press **Lane-Keeping Mode**.
5. Select a mode.

Note: The system remembers the last setting when you start your vehicle. If the system detects a MyKey™, it defaults to the last setting for that MyKey™.


ALERT MODE

What Is Alert Mode

Alert mode vibrates the steering wheel when it detects an unintended lane departure.

Lane Keeping System

How Does Alert Mode Work

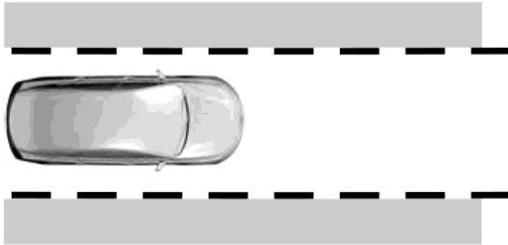

When in alert mode, the lane keeping system alerts you by vibrating the steering wheel. The intensity of the vibration is set through the lane keeping system menu.

Adjusting the Steering Wheel Vibration Intensity

To change the steering wheel vibration intensity, use the touchscreen:


1. Press **Settings** on the touchscreen.
2. Press **Driver Assistance**.
3. Press **Lane-Keeping System**.
4. Press **Alert Intensity**.
5. Select an intensity setting.

AID MODE

What Is Aid Mode

Aid mode provides temporary steering assistance toward the center of the lane.

How Does Aid Mode Work

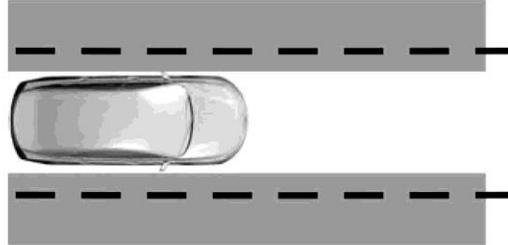

The lane keeping system aids you when an unintentional lane departure occurs. The system provides a small steering input to move the vehicle towards the center of the lane.


ALERT AND AID MODE

What Is Alert and Aid Mode

Alert and aid mode uses multiple features to keep you in your lane. The system first provides a small steering input to bring your vehicle back towards the center of the lane. If your vehicle moves too far out of the center of the lane the system alerts you with vibration in the steering wheel.

Lane Keeping System

How Does Alert and Aid Mode Work

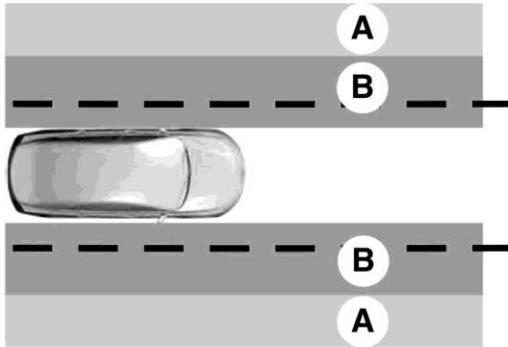

- A Alert.
- B Aid.

The lane keeping system detects a lane departure and provides aid when the vehicles enters **B** and applies the additional alert warning if **A** is entered.

LANE KEEPING SYSTEM INDICATORS



If you switch the lane keeping system on, a graphic with lane markings appears in the information display.

When you switch the system off, the lane marking graphics do not display.

Note: *The overhead vehicle graphic may still display if adaptive cruise control is enabled.*

While the lane keeping system is on, the color of the lane markings change to indicate the system status.

Gray	Green	Yellow	Red
Indicates that the system is temporarily unavailable to provide a warning or intervention on the indicated side.	Indicates that the system is available or ready to provide a warning or intervention on the indicated side.	Indicates that the system is providing or has just provided a lane keeping aid intervention.	Indicates that the system is providing or has just provided a lane keeping alert warning.

Lane Keeping System

LANE KEEPING SYSTEM – TROUBLESHOOTING

Lane Keeping System – Information Messages

Message	Action
Lane Keeping Sys. Malfunction Service Required	The system has malfunctioned. Have your vehicle checked as soon as possible.
Front Camera Temporarily Not Available	The system has detected a condition that has caused the system to be temporarily unavailable.
Front Camera Low Visibility Clean Screen	The system has detected a condition that requires you to clean the windshield in order for it to operate properly.
Front Camera Malfunction Service Required	The system has malfunctioned. Have your vehicle checked as soon as possible.
Keep Hands on Steering Wheel	The system requests that you keep your hands on the steering wheel.

Lane Keeping System

Lane Keeping System – Frequently Asked Questions

Why is the feature not available (lane markings are gray) when I can see the lane markings on the road?
Your vehicle speed is less than 40 mph (65 km/h).
The sun is shining directly into the camera lens.
A quick intentional lane change has occurred.
Your vehicle stays too close to the lane markings for an extended interval of time.
Driving at high speeds in curves.
The last alert warning or aid intervention occurred a short time ago.
Ambiguous lane markings, for example, in construction zones.
Rapid transition from light to dark, or from dark to light.
Sudden offset in lane markings.
ABS or AdvanceTrac™ is active.
There is a camera blockage due to dirt, grime, fog, frost or water on the windshield.
You are driving too close to the vehicle in front of you.
Transitioning between no lane markings to lane markings, or vice versa.
There is standing water on the road.
Faint lane markings, for example, partial yellow lane markings on concrete roads.
Lane width is too narrow or too wide.
You have not calibrated the camera after a windshield replacement.
Driving on tight or on uneven roads.

APPENDIX C

Run Log

Subject Vehicle: **2022 Ford Escape PHEV FWD**

Test start date: **5/25/2022**

Test end date: **5/25/2022**

Driver: **Anthony Saldana**

Note: For Distance at Warning, positive values indicate inside the lane

Run	Lane Marking Type	Departure Direction	Valid Run?	Distance at Visual Alert (ft)	Distance at Haptic Alert (ft)	Pass/Fail	Notes
1	Botts	Left	Y	0.25	0.12	Pass	
2			Y	0.00	0.07	Pass	
3			Y	0.16	0.09	Pass	
4			Y	0.14	0.26	Pass	
5			Y	0.16	0.19	Pass	
6			Y	0.12	0.08	Pass	
7			Y	0.08	0.07	Pass	
8	Botts	Right	Y	0.16	0.13	Pass	
9			Y	0.24	0.32	Pass	
10			Y	0.09	0.15	Pass	
11			Y	0.13	0.14	Pass	
12			Y	0.33	0.15	Pass	
13			Y	0.18	0.20	Pass	
14			Y	0.16	0.16	Pass	

Run	Lane Marking Type	Departure Direction	Valid Run?	Distance at Visual Alert (ft)	Distance at Haptic Alert (ft)	Pass/Fail	Notes
15	Solid	Right	Y	0.08	0.07	Pass	
16			Y	-0.03	-0.05	Pass	
17			Y	0.06	0.10	Pass	
18			Y	0.02	0.10	Pass	
19			Y	0.02	0.05	Pass	
20			Y	0.07	0.05	Pass	
21			Y	0.02	0.07	Pass	
22	Solid	Left	Y	-0.07	-0.11	Pass	Alert Threshold for Light Set to 0.60
23			Y	-0.01	0.09	Pass	Alert Threshold for Haptic Set to 0.35
24			Y	0.00	-0.03	Pass	
25			Y	0.06	0.05	Pass	
26			Y	-0.22	0.02	Pass	
27			Y	-0.05	-0.14	Pass	
28			Y	-0.08	-0.12	Pass	
29	Dashed	Left	Y	-0.19	-0.17	Pass	Alert Threshold for Light Set to 0.65
30			Y	-0.34	-0.12	Pass	
31			Y	-0.12	-0.08	Pass	
32			Y	-0.06	0.00	Pass	
33			Y	-0.28	-0.27	Pass	
34			Y	-0.20	-0.16	Pass	

Run	Lane Marking Type	Departure Direction	Valid Run?	Distance at Visual Alert (ft)	Distance at Haptic Alert (ft)	Pass/Fail	Notes
35			Y	-0.15	-0.23	Pass	
36	Dashed	Right	Y	0.03	-0.06	Pass	Alert Threshold for Light Set to 0.55
37			Y	0.05	0.11	Pass	
38			Y	0.04	0.07	Pass	
39			Y	0.18	0.13	Pass	
40			Y	0.16	0.18	Pass	
41			Y	0.15	0.15	Pass	
42			Y	0.14	0.17	Pass	

APPENDIX D

Time History Plots

LIST OF FIGURES

	Page
Figure D1. Example Time History for Lane Departure Warning Test, Passing.....	D-8
Figure D2. Example Time History for Lane Departure Warning Test, Failing, No Warning Issued.....	D-9
Figure D3. Example Time History for Lane Departure Warning Test, Invalid Run Due to Subject Vehicle Yaw Rate	D-10
Figure D4. Time History for Run 01, Botts Dots, Left Departure, Visual Warning	D-11
Figure D5. Time History for Run 01, Botts Dots, Left Departure, Haptic Warning	D-12
Figure D6. Time History for Run 02, Botts Dots, Left Departure, Visual Warning	D-13
Figure D7. Time History for Run 02, Botts Dots, Left Departure, Haptic Warning	D-14
Figure D8. Time History for Run 03, Botts Dots, Left Departure, Visual Warning	D-15
Figure D9. Time History for Run 03, Botts Dots, Left Departure, Haptic Warning	D-16
Figure D10. Time History for Run 04, Botts Dots, Left Departure, Visual Warning	D-17
Figure D11. Time History for Run 04, Botts Dots, Left Departure, Haptic Warning	D-18
Figure D12. Time History for Run 05, Botts Dots, Left Departure, Visual Warning	D-19
Figure D13. Time History for Run 05, Botts Dots, Left Departure, Haptic Warning	D-20
Figure D14. Time History for Run 06, Botts Dots, Left Departure, Visual Warning	D-21
Figure D15. Time History for Run 06, Botts Dots, Left Departure, Haptic Warning	D-22
Figure D16. Time History for Run 07, Botts Dots, Left Departure, Visual Warning	D-23
Figure D17. Time History for Run 07, Botts Dots, Left Departure, Haptic Warning	D-24
Figure D18. Time History for Run 08, Botts Dots, Right Departure, Visual Warning	D-25
Figure D19. Time History for Run 08, Botts Dots, Right Departure, Haptic Warning.....	D-26
Figure D20. Time History for Run 09, Botts Dots, Right Departure, Visual Warning	D-27
Figure D21. Time History for Run 09, Botts Dots, Right Departure, Haptic Warning.....	D-28
Figure D22. Time History for Run 10, Botts Dots, Right Departure, Visual Warning	D-29
Figure D23. Time History for Run 10, Botts Dots, Right Departure, Haptic Warning.....	D-30
Figure D24. Time History for Run 11, Botts Dots, Right Departure, Visual Warning	D-31
Figure D25. Time History for Run 11, Botts Dots, Right Departure, Haptic Warning.....	D-32
Figure D26. Time History for Run 12, Botts Dots, Right Departure, Visual Warning	D-33
Figure D27. Time History for Run 12, Botts Dots, Right Departure, Haptic Warning.....	D-34
Figure D28. Time History for Run 13, Botts Dots, Right Departure, Visual Warning	D-35
Figure D29. Time History for Run 13, Botts Dots, Right Departure, Haptic Warning.....	D-36
Figure D30. Time History for Run 14, Botts Dots, Right Departure, Visual Warning	D-37
Figure D31. Time History for Run 14, Botts Dots, Right Departure, Haptic Warning.....	D-38
Figure D32. Time History for Run 15, Solid Line, Right Departure, Visual Warning.....	D-39
Figure D33. Time History for Run 15, Solid Line, Right Departure, Haptic Warning	D-40
Figure D34. Time History for Run 16, Solid Line, Right Departure, Visual Warning	D-41
Figure D35. Time History for Run 16, Solid Line, Right Departure, Haptic Warning	D-42
Figure D36. Time History for Run 17, Solid Line, Right Departure, Visual Warning	D-43
Figure D37. Time History for Run 17, Solid Line, Right Departure, Haptic Warning	D-44
Figure D38. Time History for Run 18, Solid Line, Right Departure, Visual Warning	D-45

Figure D39.	Time History for Run 18, Solid Line, Right Departure, Haptic Warning	D-46
Figure D40.	Time History for Run 19, Solid Line, Right Departure, Visual Warning	D-47
Figure D41.	Time History for Run 19, Solid Line, Right Departure, Haptic Warning	D-48
Figure D42.	Time History for Run 20, Solid Line, Right Departure, Visual Warning	D-49
Figure D43.	Time History for Run 20, Solid Line, Right Departure, Haptic Warning	D-50
Figure D44.	Time History for Run 21, Solid Line, Right Departure, Visual Warning	D-51
Figure D45.	Time History for Run 21, Solid Line, Right Departure, Haptic Warning	D-52
Figure D46.	Time History for Run 22, Solid Line, Left Departure, Visual Warning	D-53
Figure D47.	Time History for Run 22, Solid Line, Left Departure, Haptic Warning	D-54
Figure D48.	Time History for Run 23, Solid Line, Left Departure, Visual Warning	D-55
Figure D49.	Time History for Run 23, Solid Line, Left Departure, Haptic Warning	D-56
Figure D50.	Time History for Run 24, Solid Line, Left Departure, Visual Warning	D-57
Figure D51.	Time History for Run 24, Solid Line, Left Departure, Haptic Warning	D-58
Figure D52.	Time History for Run 25, Solid Line, Left Departure, Visual Warning	D-59
Figure D53.	Time History for Run 25, Solid Line, Left Departure, Haptic Warning	D-60
Figure D54.	Time History for Run 26, Solid Line, Left Departure, Visual Warning	D-61
Figure D55.	Time History for Run 26, Solid Line, Left Departure, Haptic Warning	D-62
Figure D56.	Time History for Run 27, Solid Line, Left Departure, Visual Warning	D-63
Figure D57.	Time History for Run 27, Solid Line, Left Departure, Haptic Warning	D-64
Figure D58.	Time History for Run 28, Solid Line, Left Departure, Visual Warning	D-65
Figure D59.	Time History for Run 28, Solid Line, Left Departure, Haptic Warning	D-66
Figure D60.	Time History for Run 29, Dashed Line, Left Departure, Visual Warning	D-67
Figure D61.	Time History for Run 29, Dashed Line, Left Departure, Haptic Warning	D-68
Figure D62.	Time History for Run 30, Dashed Line, Left Departure, Visual Warning	D-69
Figure D63.	Time History for Run 30, Dashed Line, Left Departure, Haptic Warning	D-70
Figure D64.	Time History for Run 31, Dashed Line, Left Departure, Visual Warning	D-71
Figure D65.	Time History for Run 31, Dashed Line, Left Departure, Haptic Warning	D-72
Figure D66.	Time History for Run 32, Dashed Line, Left Departure, Visual Warning	D-73
Figure D67.	Time History for Run 32, Dashed Line, Left Departure, Haptic Warning	D-74
Figure D68.	Time History for Run 33, Dashed Line, Left Departure, Visual Warning	D-75
Figure D69.	Time History for Run 33, Dashed Line, Left Departure, Haptic Warning	D-76
Figure D70.	Time History for Run 34, Dashed Line, Left Departure, Visual Warning	D-77
Figure D71.	Time History for Run 34, Dashed Line, Left Departure, Haptic Warning	D-78
Figure D72.	Time History for Run 35, Dashed Line, Left Departure, Visual Warning	D-79
Figure D73.	Time History for Run 35, Dashed Line, Left Departure, Haptic Warning	D-80
Figure D74.	Time History for Run 36, Dashed Line, Right Departure, Visual Warning	D-81
Figure D75.	Time History for Run 36, Dashed Line, Right Departure, Haptic Warning	D-82
Figure D76.	Time History for Run 37, Dashed Line, Right Departure, Visual Warning	D-83
Figure D77.	Time History for Run 37, Dashed Line, Right Departure, Haptic Warning	D-84
Figure D78.	Time History for Run 38, Dashed Line, Right Departure, Visual Warning	D-85
Figure D79.	Time History for Run 38, Dashed Line, Right Departure, Haptic Warning	D-86
Figure D80.	Time History for Run 39, Dashed Line, Right Departure, Visual Warning	D-87
Figure D81.	Time History for Run 39, Dashed Line, Right Departure, Haptic Warning	D-88

Figure D82. Time History for Run 40, Dashed Line, Right Departure, Visual Warning.....	D-89
Figure D83. Time History for Run 40, Dashed Line, Right Departure, Haptic Warning	D-90
Figure D84. Time History for Run 41, Dashed Line, Right Departure, Visual Warning.....	D-91
Figure D85. Time History for Run 41, Dashed Line, Right Departure, Haptic Warning	D-92
Figure D86. Time History for Run 42, Dashed Line, Right Departure, Visual Warning.....	D-93
Figure D87. Time History for Run 42, Dashed Line, Right Departure, Haptic Warning	D-94

Description of Time History Plots

A set of time history plots is provided for each valid run in the test series. Each set of plots comprises time varying data from the Subject Vehicle, as well as pass/fail envelopes and thresholds. The following is a description of data types shown in the time history plots, as well as a description of the color code for data envelopes.

Time History Plot Description

Time history figures include the following sub-plots:

- Warning – Indicates timing of warning issued by LDW system. Depending on the type of LDW alert or instrumentation used to measure the alert, this can be any of the following:
 - Filtered and rectified sound signal
 - Filtered and rectified acceleration (e.g., steering wheel vibration)
 - Light sensor signal
 - Discrete on/off value
- Speed (mph) – Speed of the Subject Vehicle
- Yaw Rate (deg/sec) – Yaw rate of the Subject Vehicle
- Distance to Lane Edge (ft) – Lateral distance (in lane coordinates) from the outer front tire bulge to the inside edge of the lane marking of interest for a given test (a positive value indicates the vehicle is completely within the lane while a negative value indicates that the outer front tire bulge has crossed over the inner lane marking edge). The distance to the lane edge at the moment the LDW alert is issued, is displayed to the right of subplot.
- Lateral Lane Velocity (ft/sec) – Lateral velocity (in lane coordinates) of the outer front tire bulge
- Bird's Eye View – Indicates the position of the Subject Vehicle with respect to the lane marking of interest for a given test. Green rectangles represent the Subject Vehicle's position at approximately 2 second intervals, while the yellow rectangle indicates the position of the Subject Vehicle at the time of LDW warning issuance.

Envelopes and Thresholds

Each of the time history plot figures can contain either green or yellow envelopes and/or black threshold lines. These envelopes and thresholds are used to programmatically and visually determine the validity of a given test run. Envelope and threshold exceedances are indicated with either red shading or red asterisks, and red text is placed to the right side of the plot indicating the type of exceedance.

Green envelopes indicate that the time-varying data should not exceed the envelope boundaries at any time within the envelope. Exceedances of a green envelope are indicated by red shading in the area between the measured time-varying data and the envelope boundaries.

Yellow envelopes indicate that the time-varying data should not exceed the envelope only at the right end. Exceedances at the right extent of a yellow envelope are indicated by red asterisks. Data within the boundaries at the right extent of a yellow envelope are indicated by green circles.

For the warning plot, a dashed black threshold line indicates the threshold used to determine the onset of the LDW alert. The alert is considered on the first time the alert signal crosses this threshold line.

Color Codes

Color codes have been adopted to easily identify the types of data, envelopes, and thresholds used in the plots.

Color codes can be broken into three categories:

1. Validation envelopes and thresholds
 1. Validation envelopes and thresholds
 2. Instantaneous samplings
 3. Text
1. Validation envelope and threshold color codes:
 - Green envelope = time varying data must be within the envelope at all times in order to be valid
 - Yellow envelope = time varying data must be within limits at right end
 - Black threshold (Solid) = time varying data must not exceed this threshold in order to be valid
 - Black threshold (Dashed) = for reference only – this can include warning level thresholds which are used to determine the timing of the alert
2. Instantaneous sampling color codes:
 - Green circle = passing or valid value at a given moment in time
 - Red asterisk = failing or invalid value at a given moment in time

3. Text color codes:


- Green = passing or valid value
- Red = failing or invalid value

Other Notations

- NG – Indicates that the value for that variable was outside of bounds and therefore “No Good”.
- No Wng – No warning was detected.


The minimum (worst) GPS fix type is displayed in the lower right corner of each page. The only valid fix type is RTK fixed (displayed in green). If the fix type during any portion of the test was anything other than RTK fixed, then “RTK Fixed OR LESS!!” is displayed in red.

Examples of time history plots (including passing, failing and invalid runs) are shown in Figure D1 through Figure D3. Actual time history data plots for the vehicle under consideration are provided subsequently.

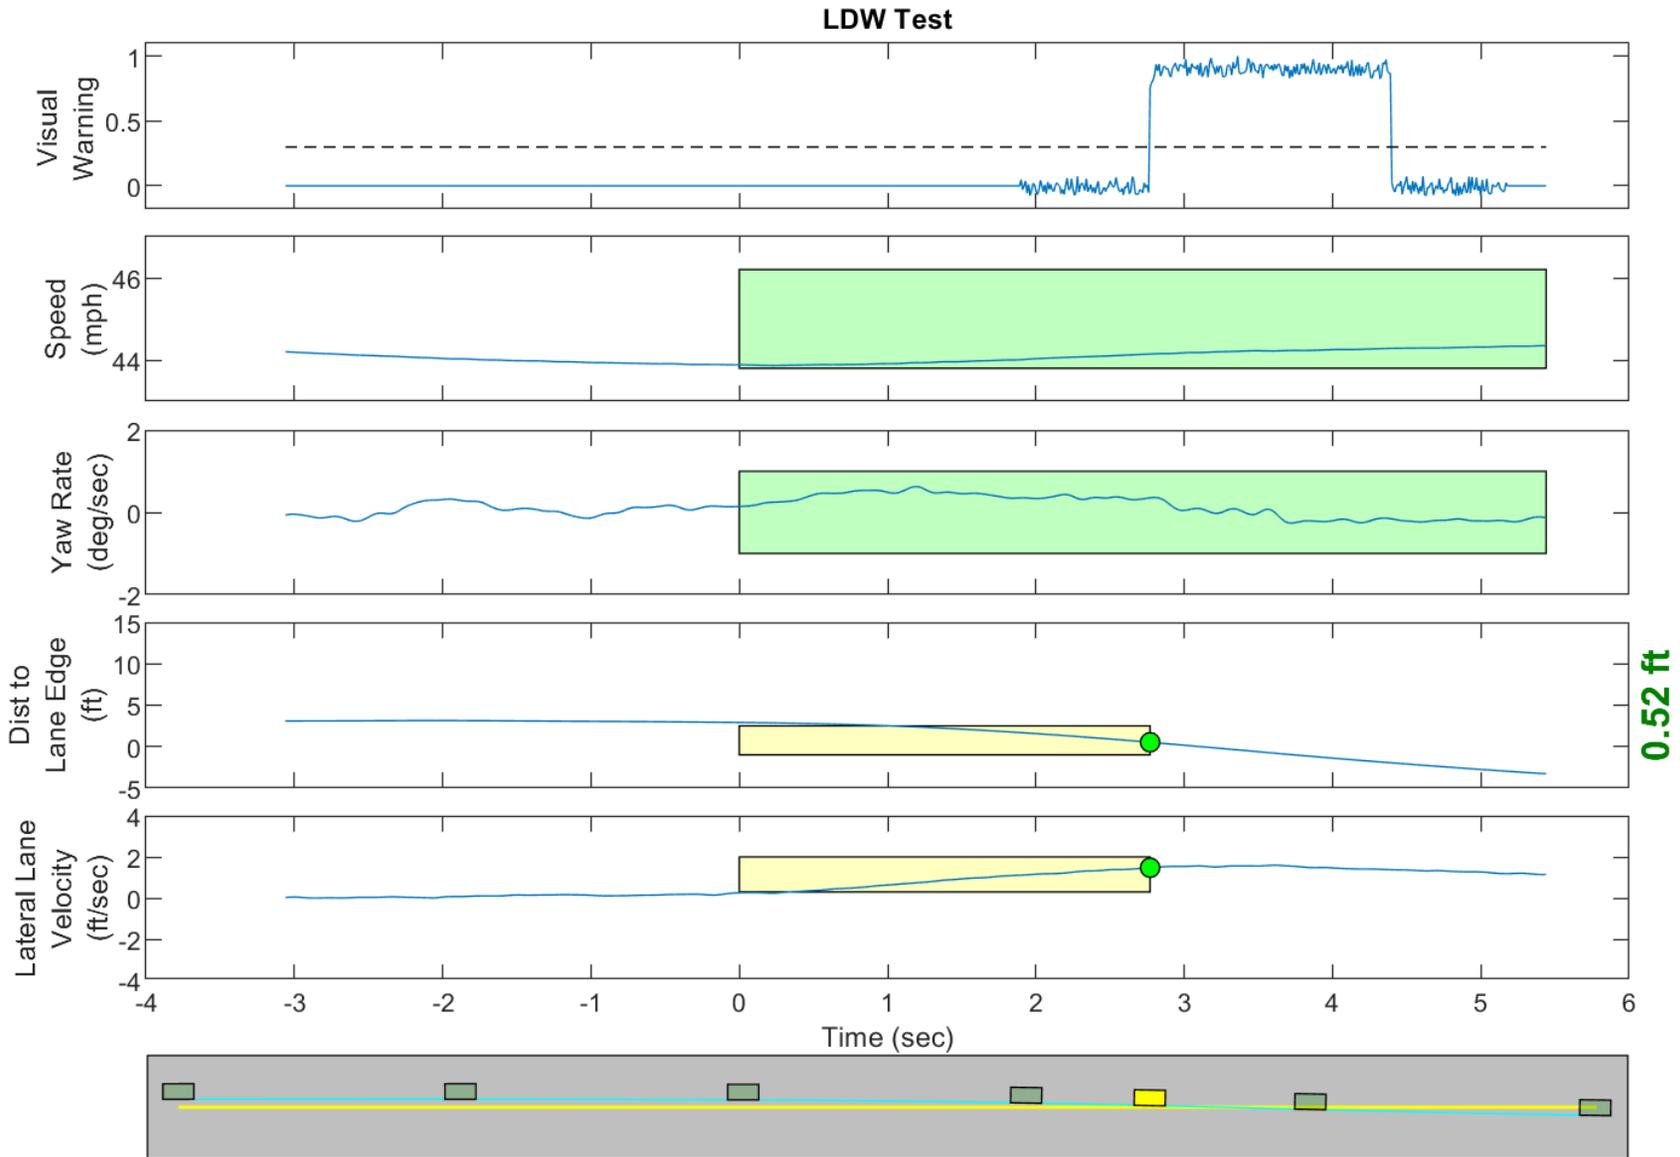


GPS Fix Type: RTK Fixed

Figure D1. Example Time History for Lane Departure Warning Test, Passing

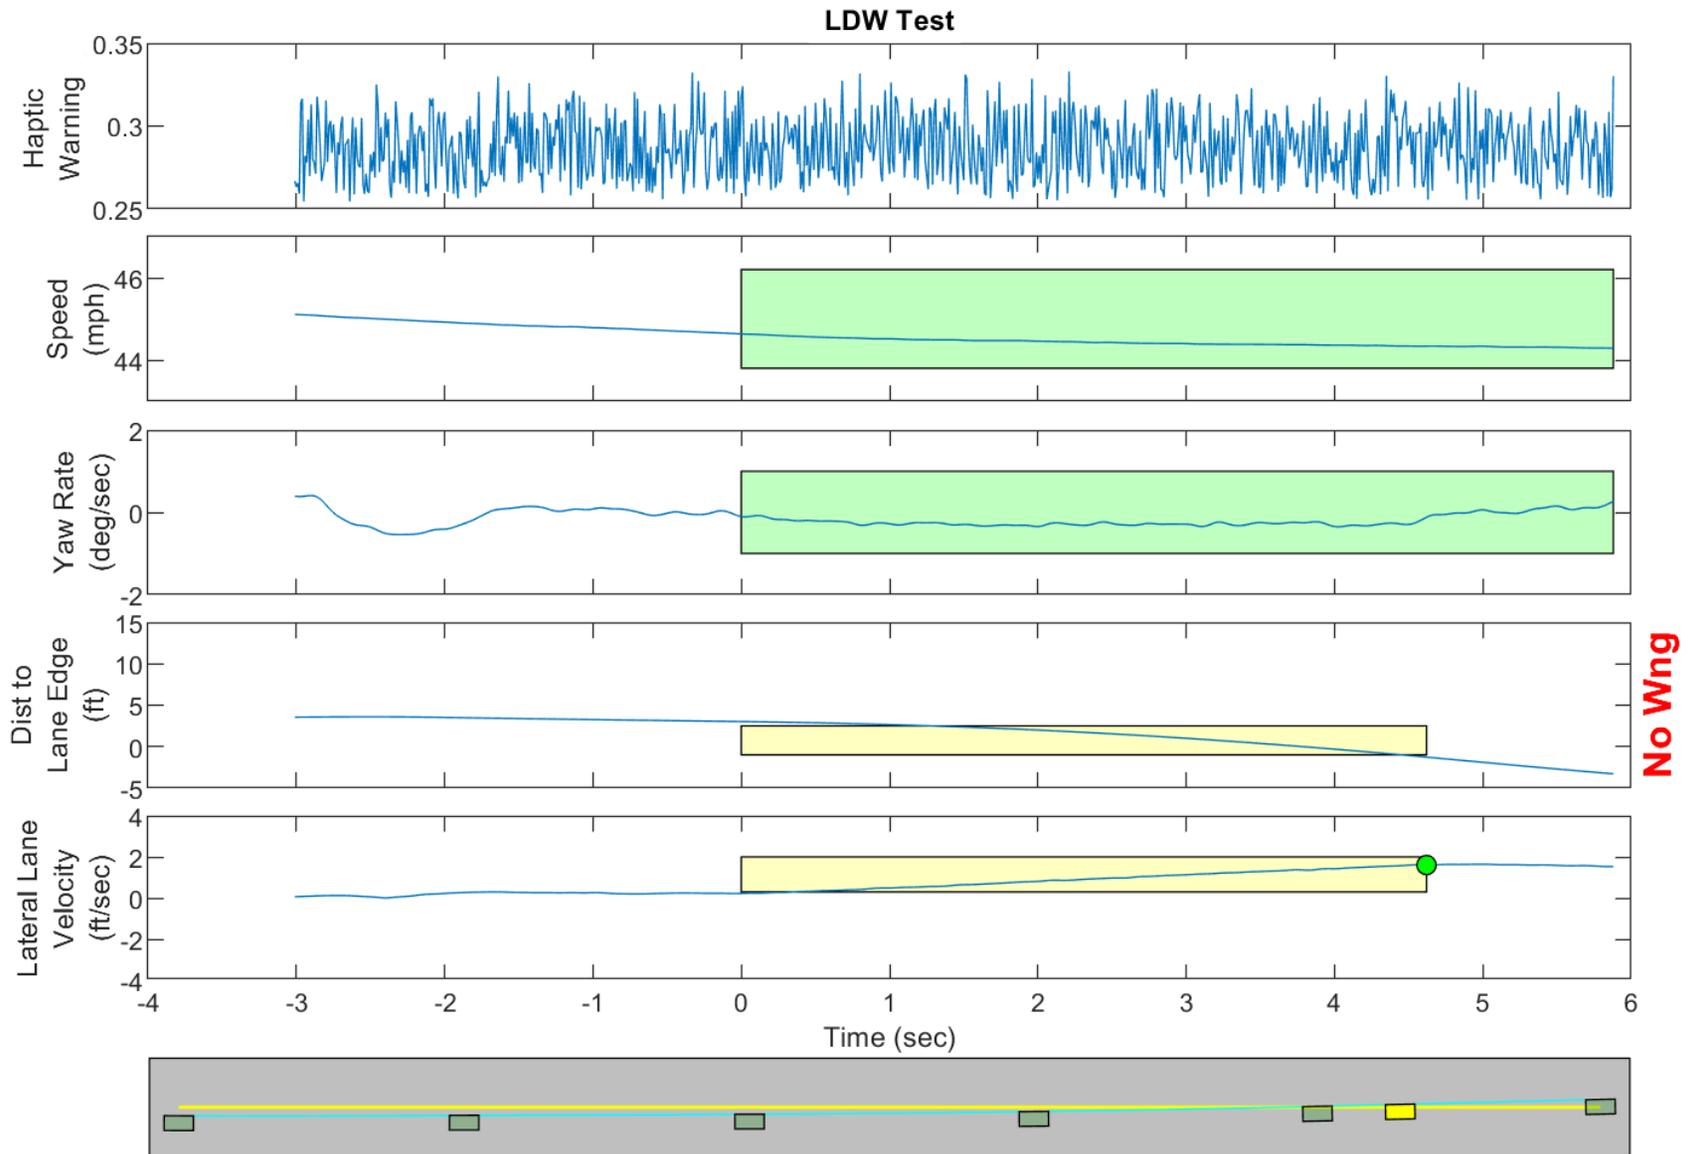


GPS Fix Type: RTK Fixed

Figure D2. Example Time History for Lane Departure Warning Test, Failing, No Warning Issued

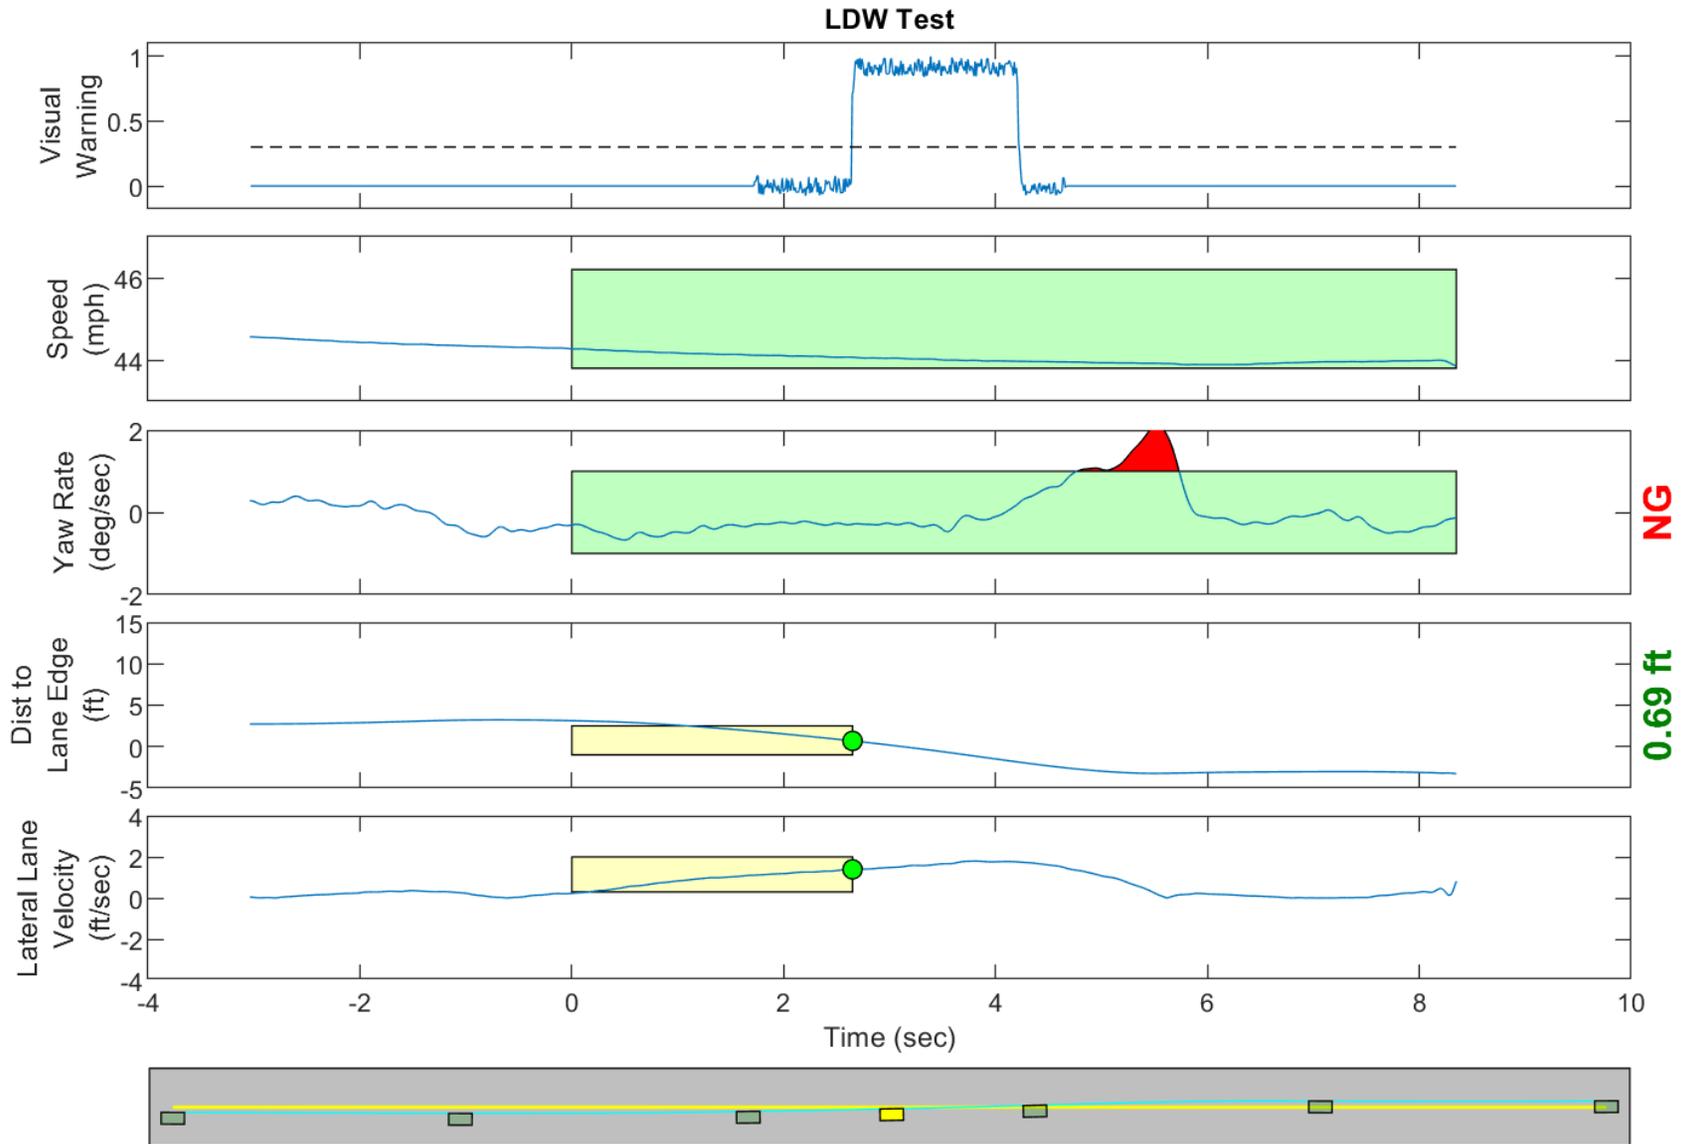


GPS Fix Type: RTK Fixed

Figure D3. Example Time History for Lane Departure Warning Test, Invalid Run Due to Subject Vehicle Yaw Rate

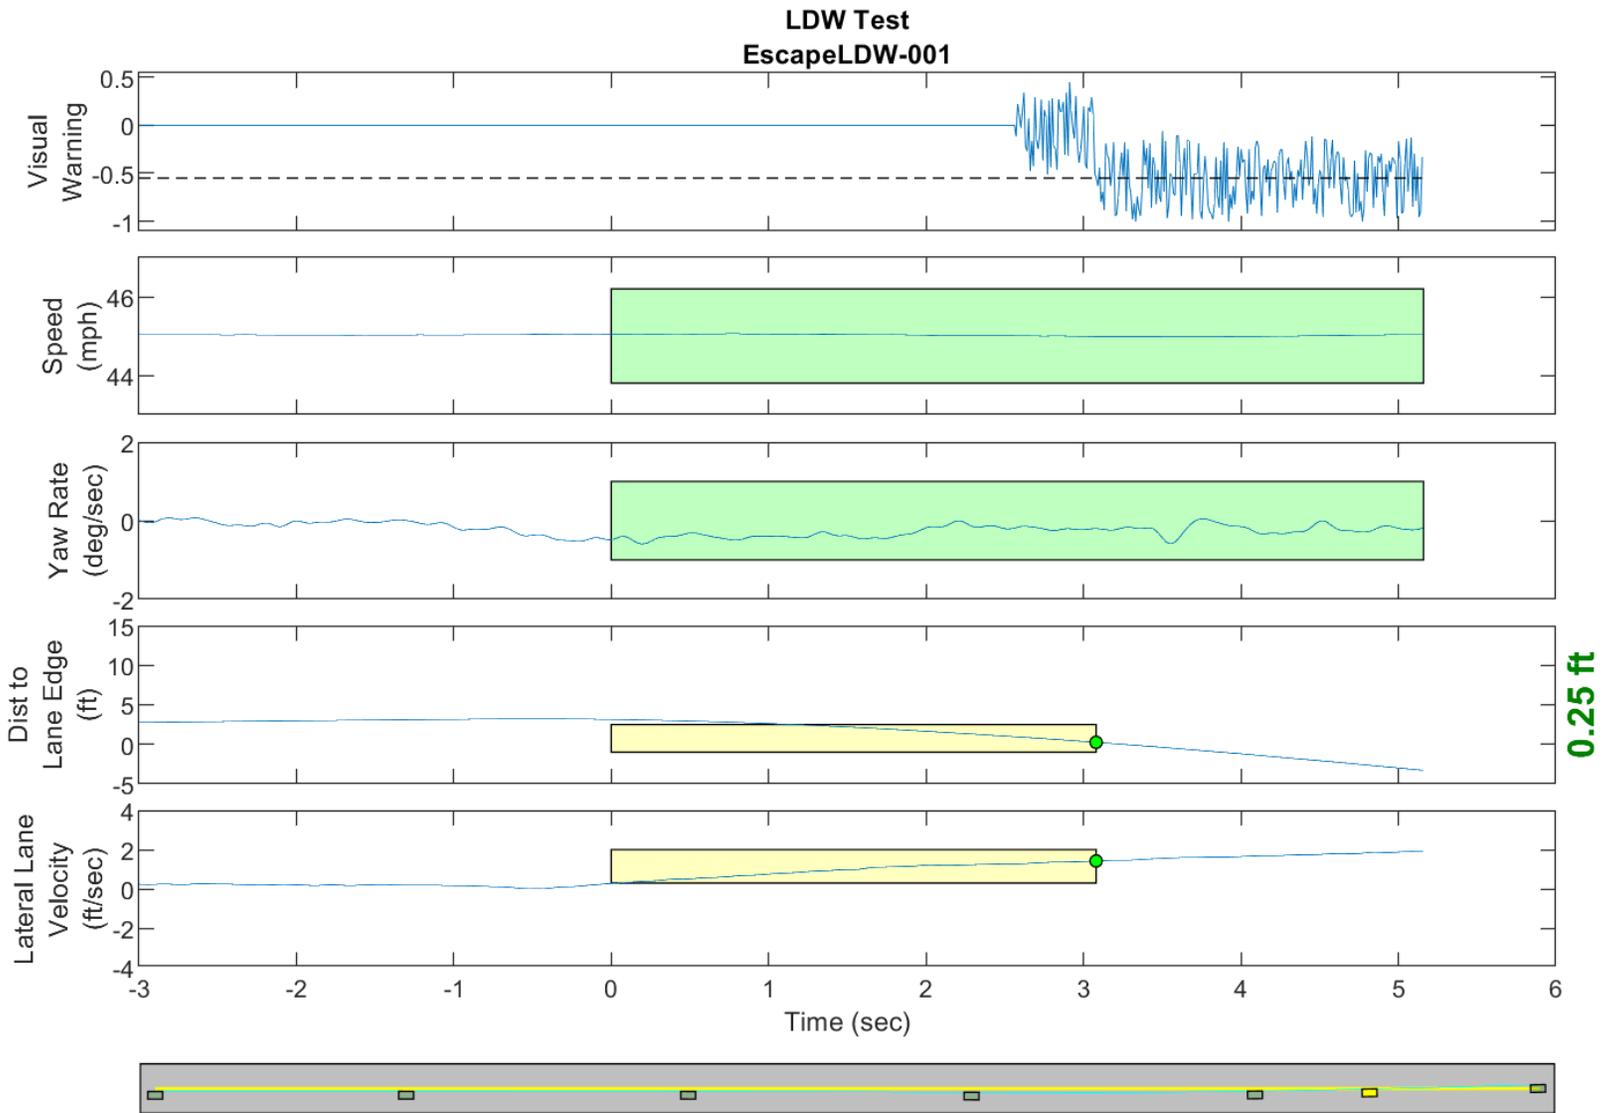


GPS Fix Type: RTK Fixed

Figure D4. Time History for Run 01, Botts Dots, Left Departure, Visual Warning

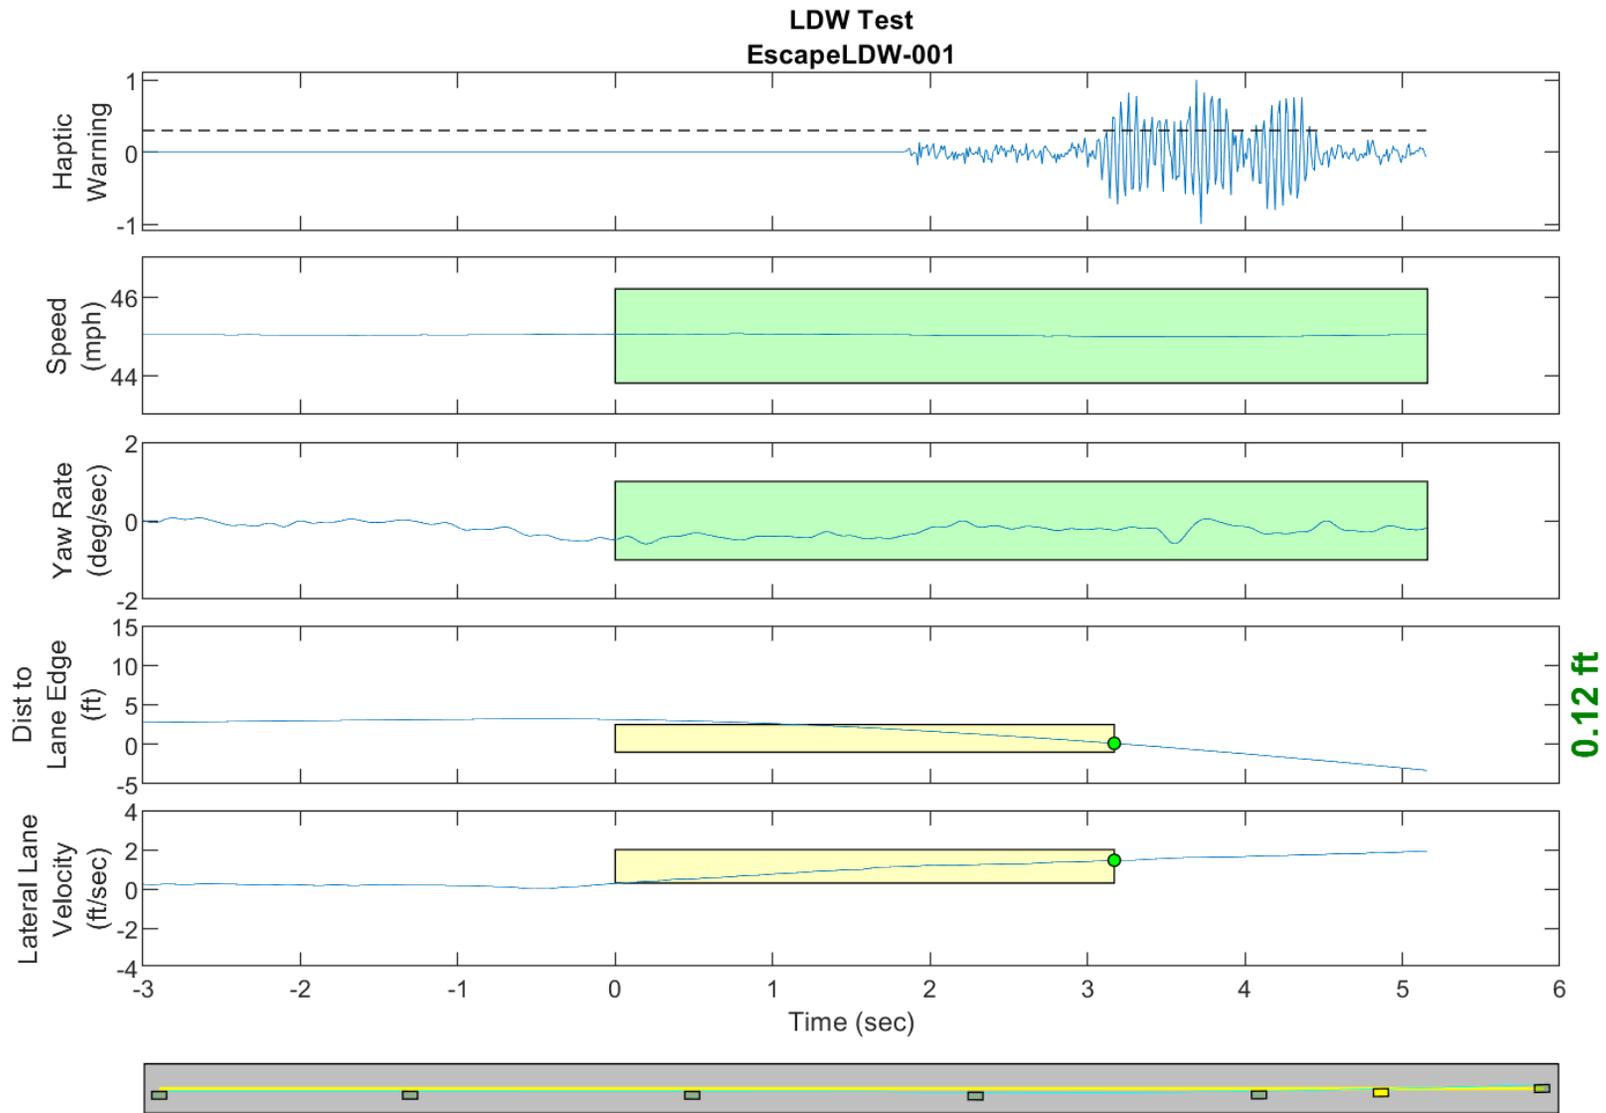


GPS Fix Type: RTK Fixed

Figure D5. Time History for Run 01, Botts Dots, Left Departure, Haptic Warning

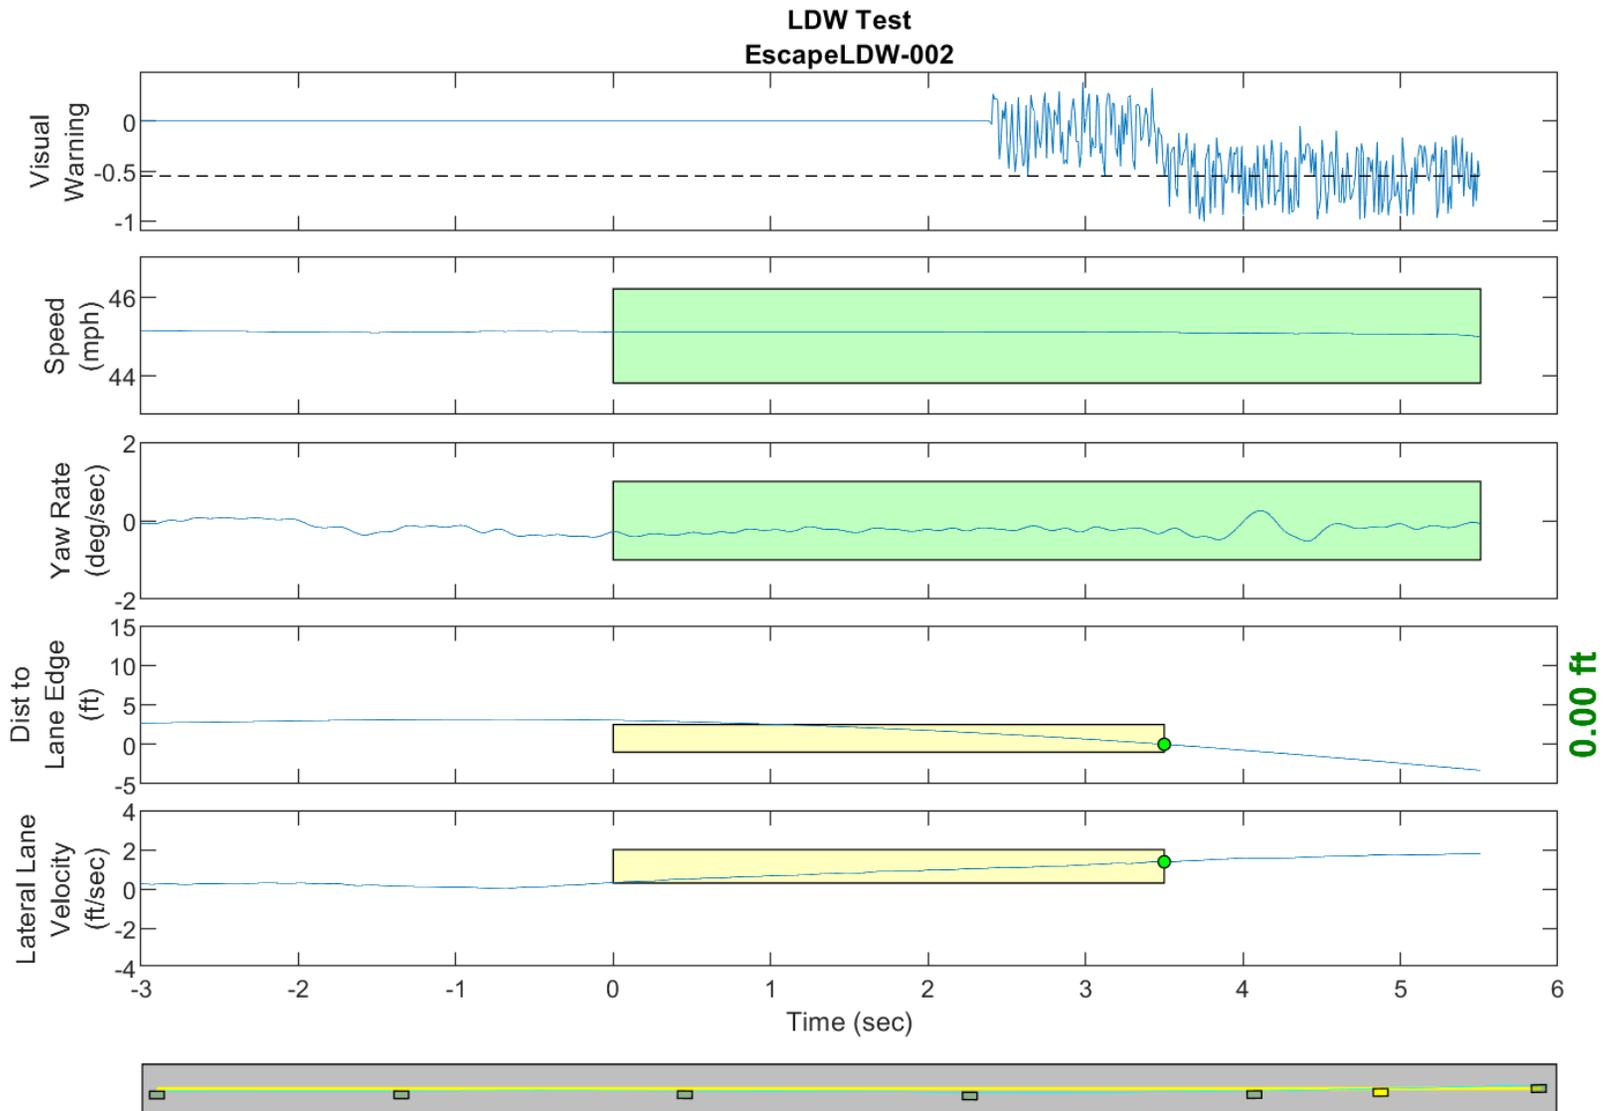


GPS Fix Type: RTK Fixed

Figure D6. Time History for Run 02, Botts Dots, Left Departure, Visual Warning

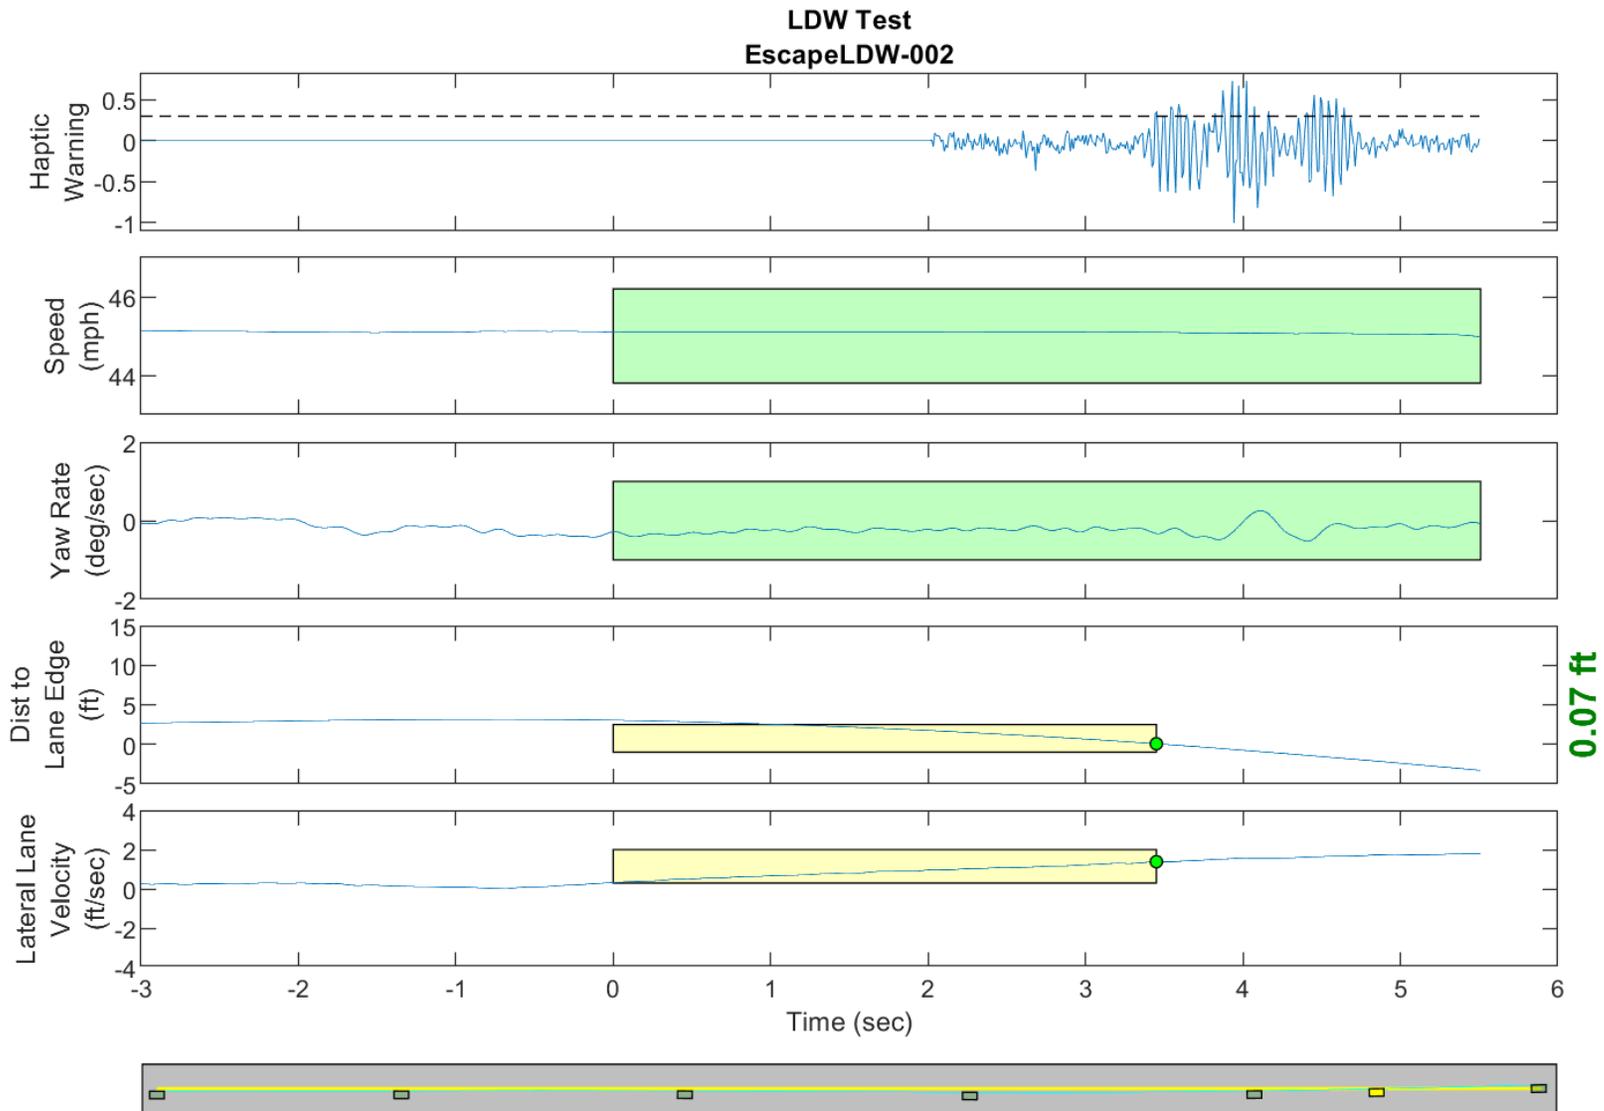


GPS Fix Type: RTK Fixed

Figure D7. Time History for Run 02, Botts Dots, Left Departure, Haptic Warning

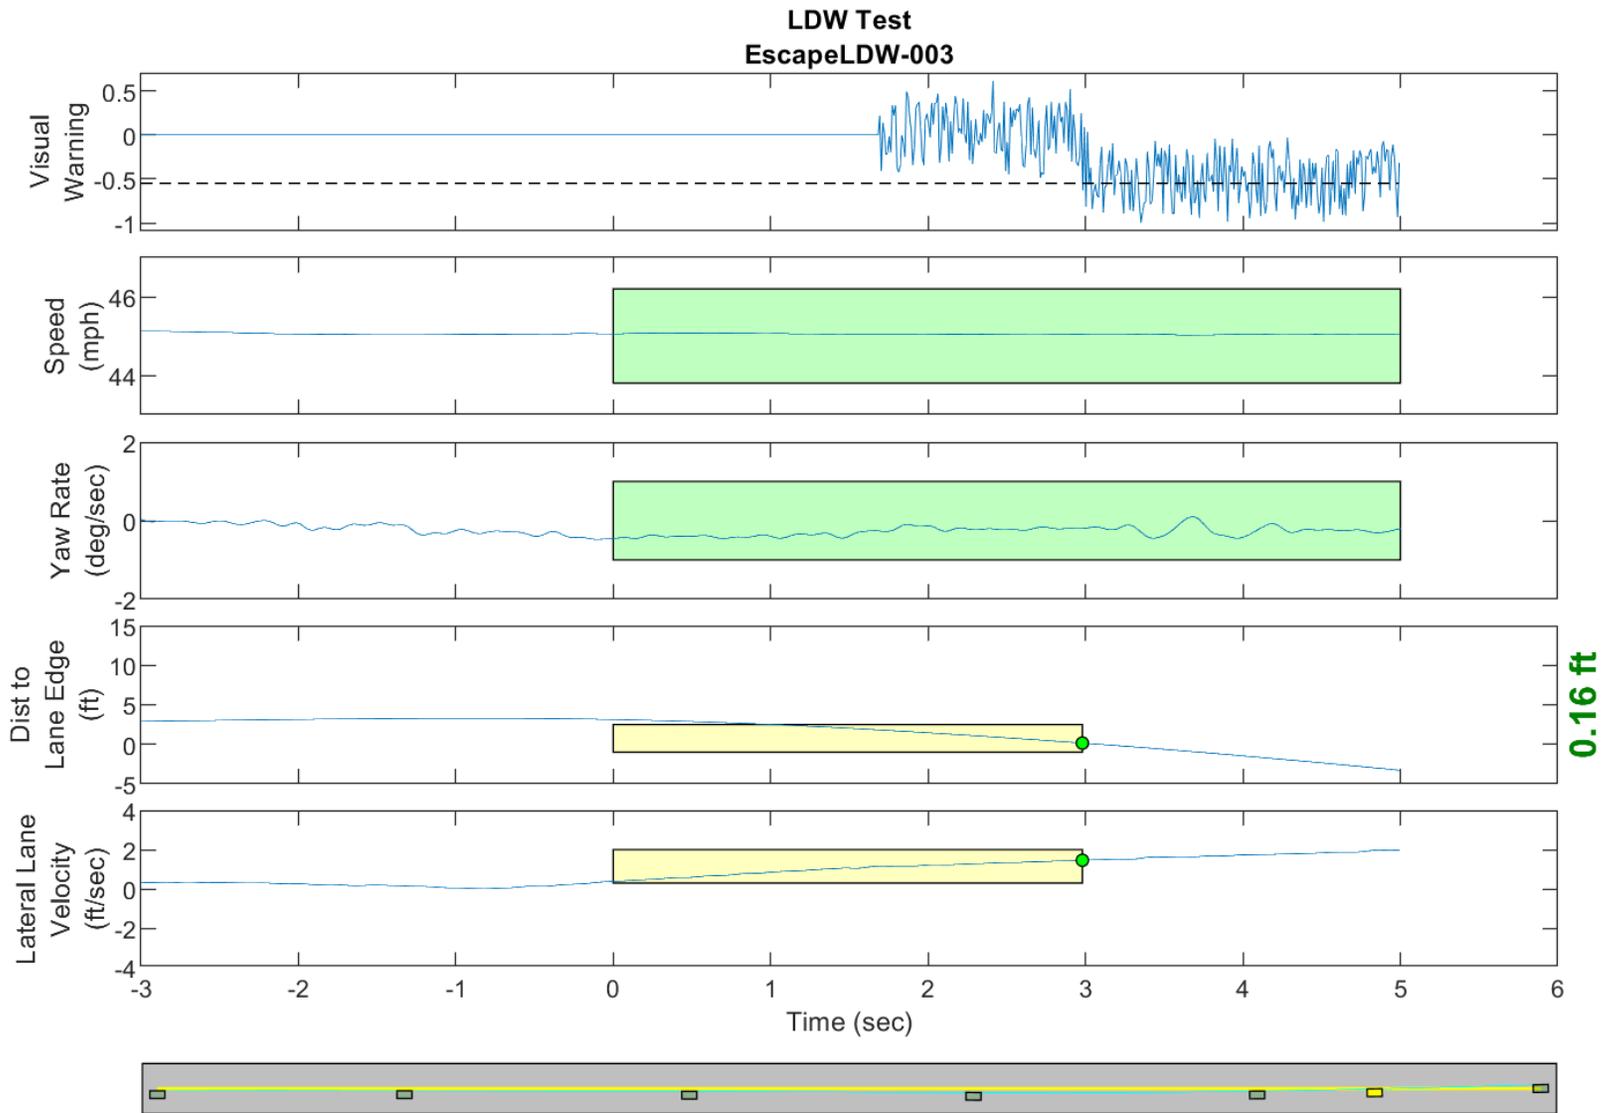


GPS Fix Type: RTK Fixed

Figure D8. Time History for Run 03, Botts Dots, Left Departure, Visual Warning

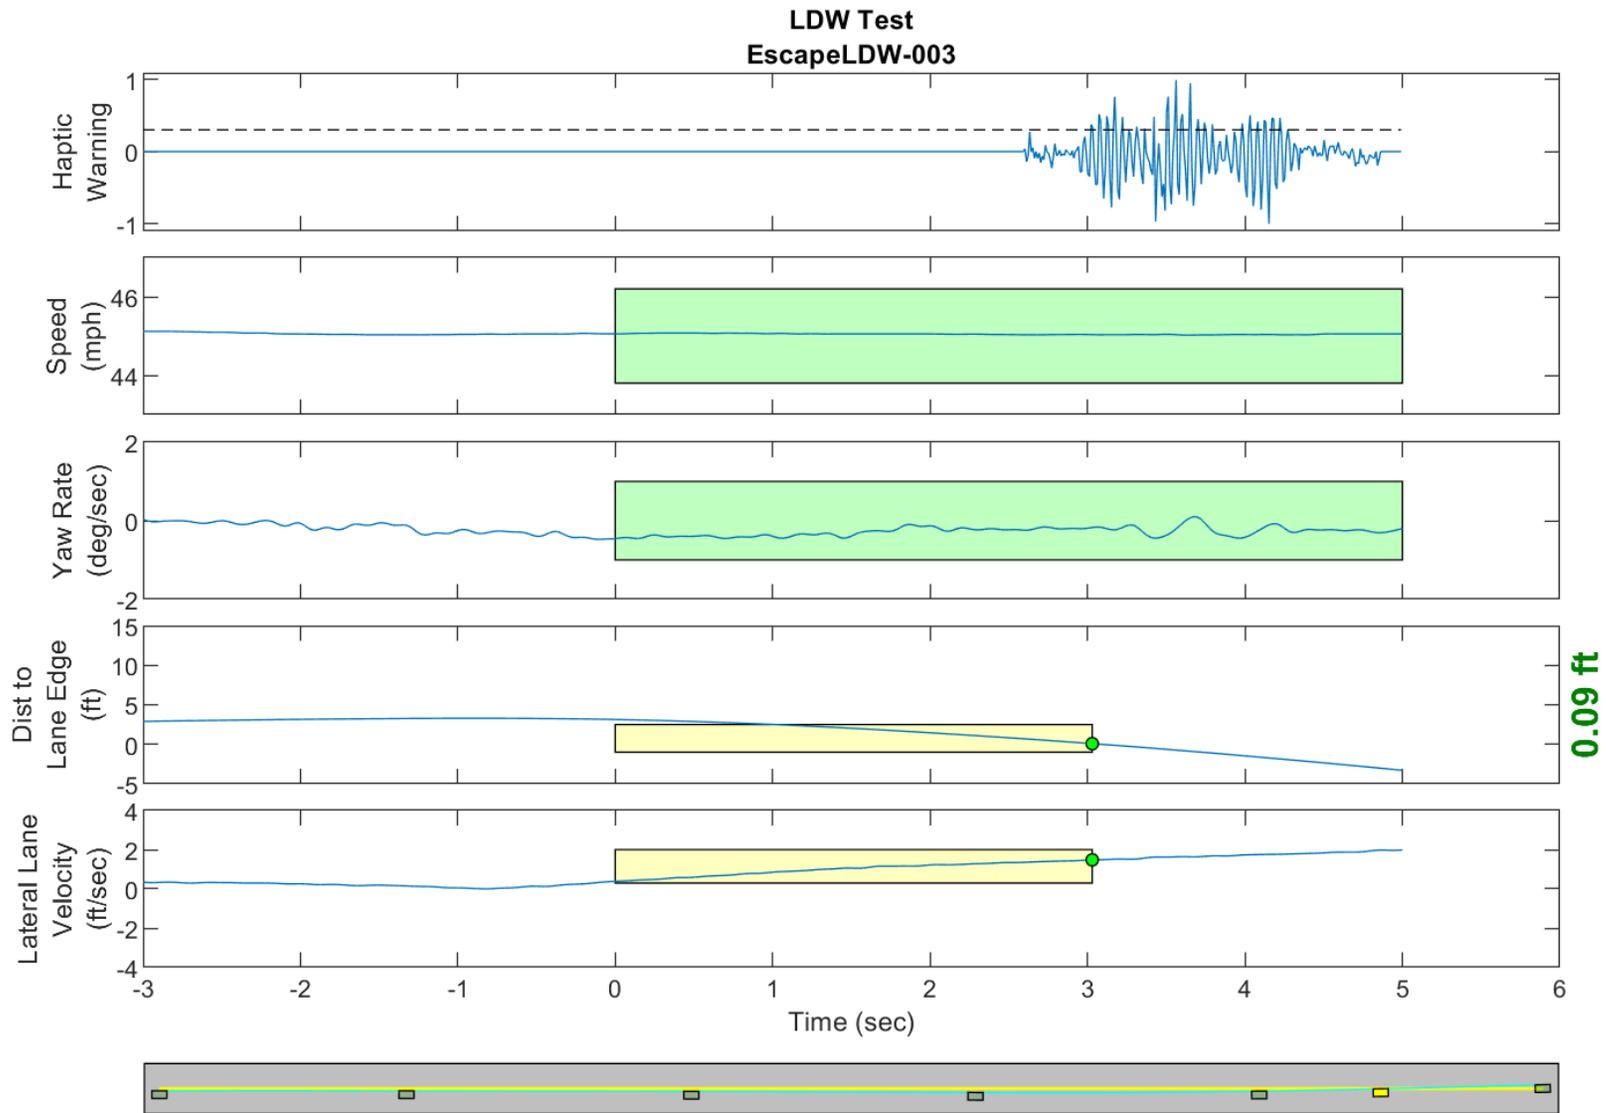


GPS Fix Type: RTK Fixed

Figure D9. Time History for Run 03, Botts Dots, Left Departure, Haptic Warning

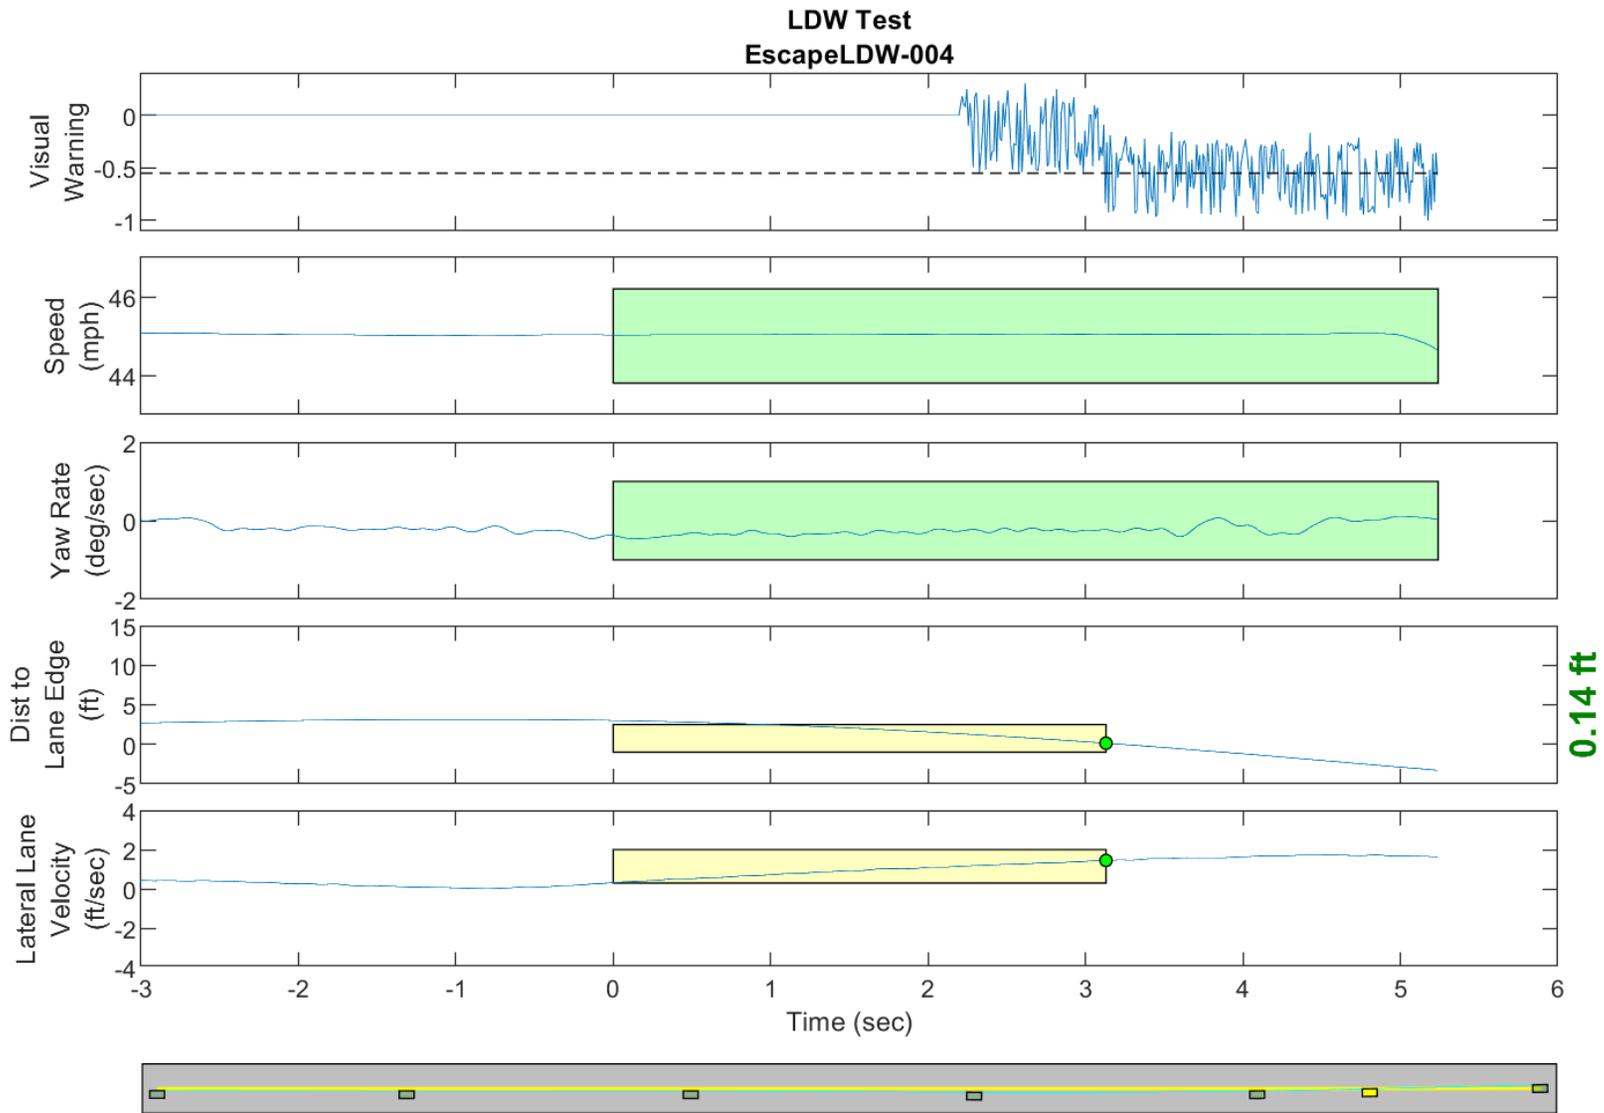


GPS Fix Type: RTK Fixed

Figure D10. Time History for Run 04, Botts Dots, Left Departure, Visual Warning

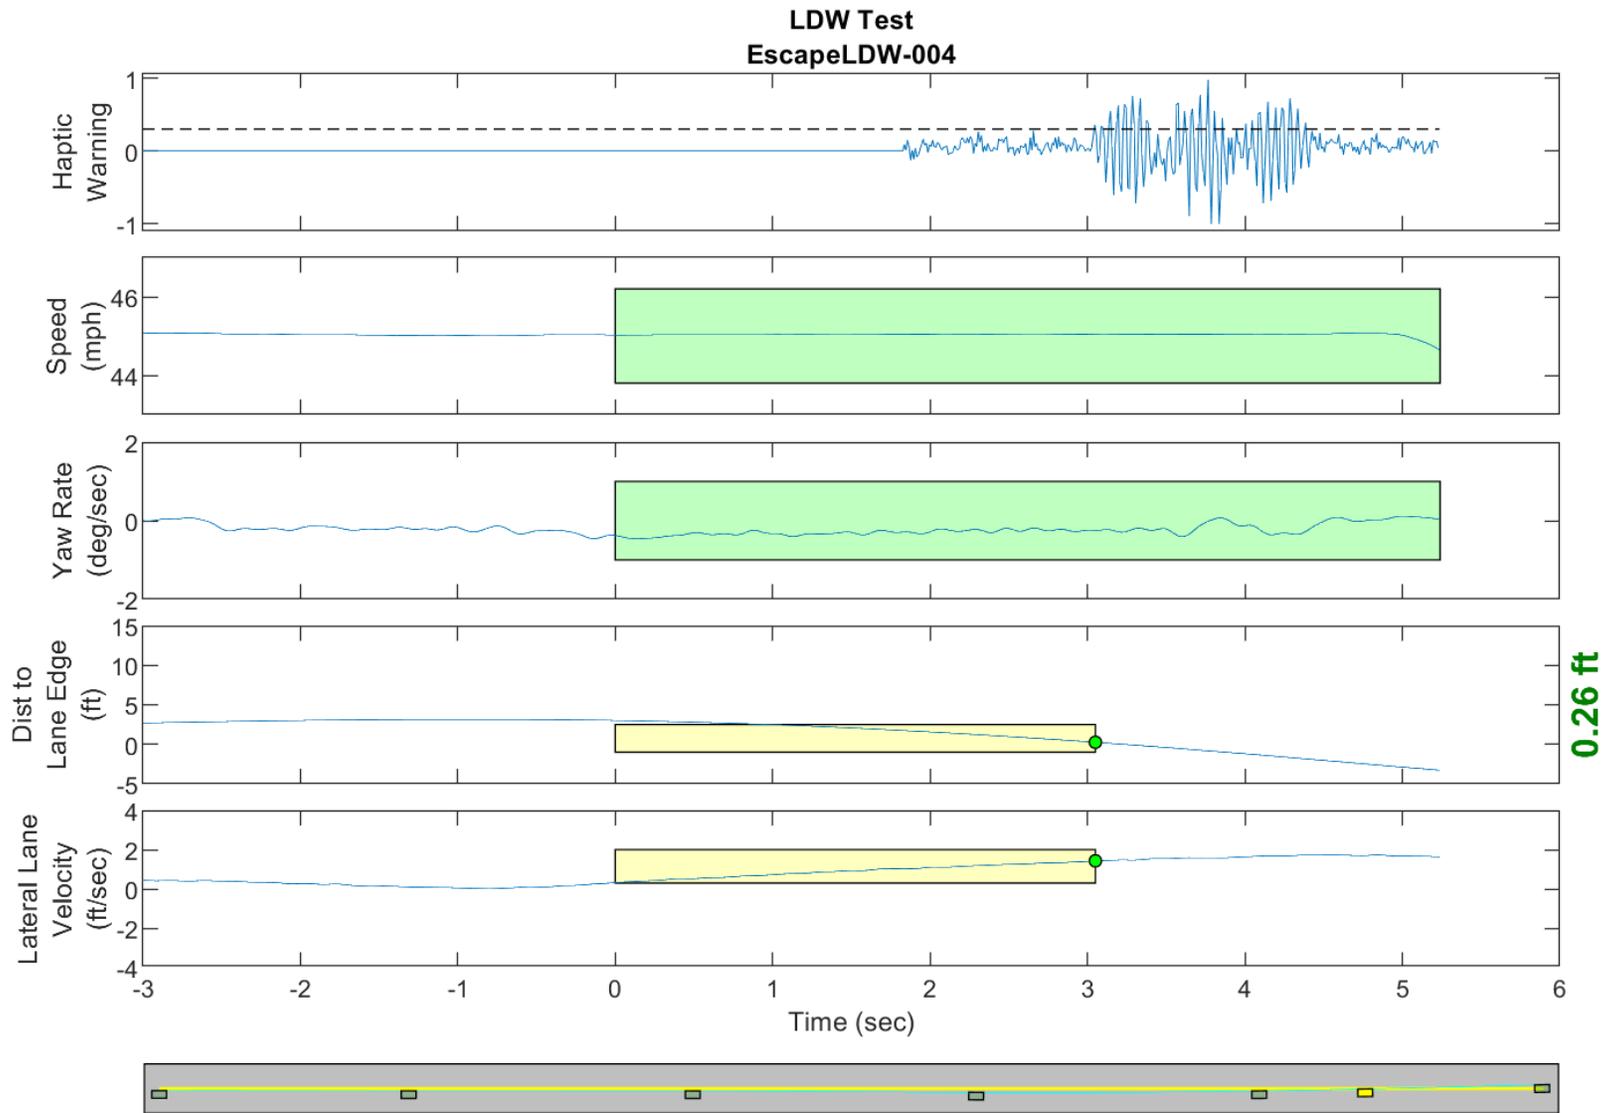


GPS Fix Type: RTK Fixed

Figure D11. Time History for Run 04, Botts Dots, Left Departure, Haptic Warning

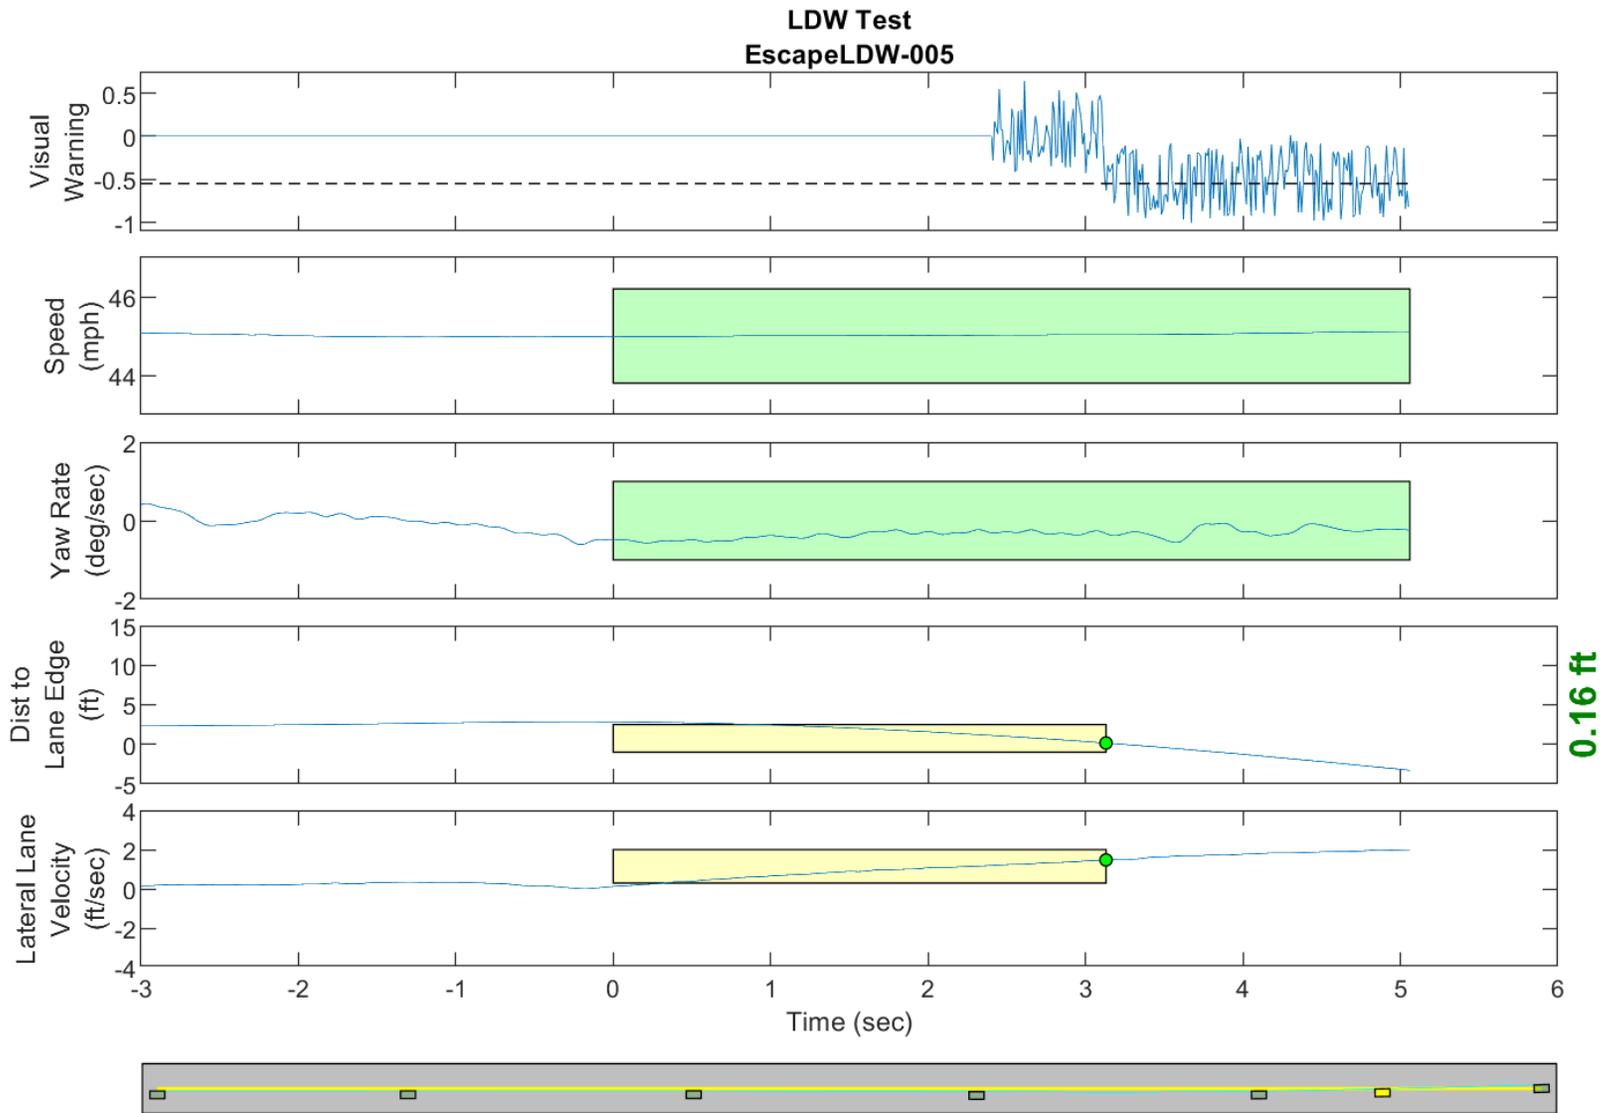


GPS Fix Type: RTK Fixed

Figure D12. Time History for Run 05, Botts Dots, Left Departure, Visual Warning

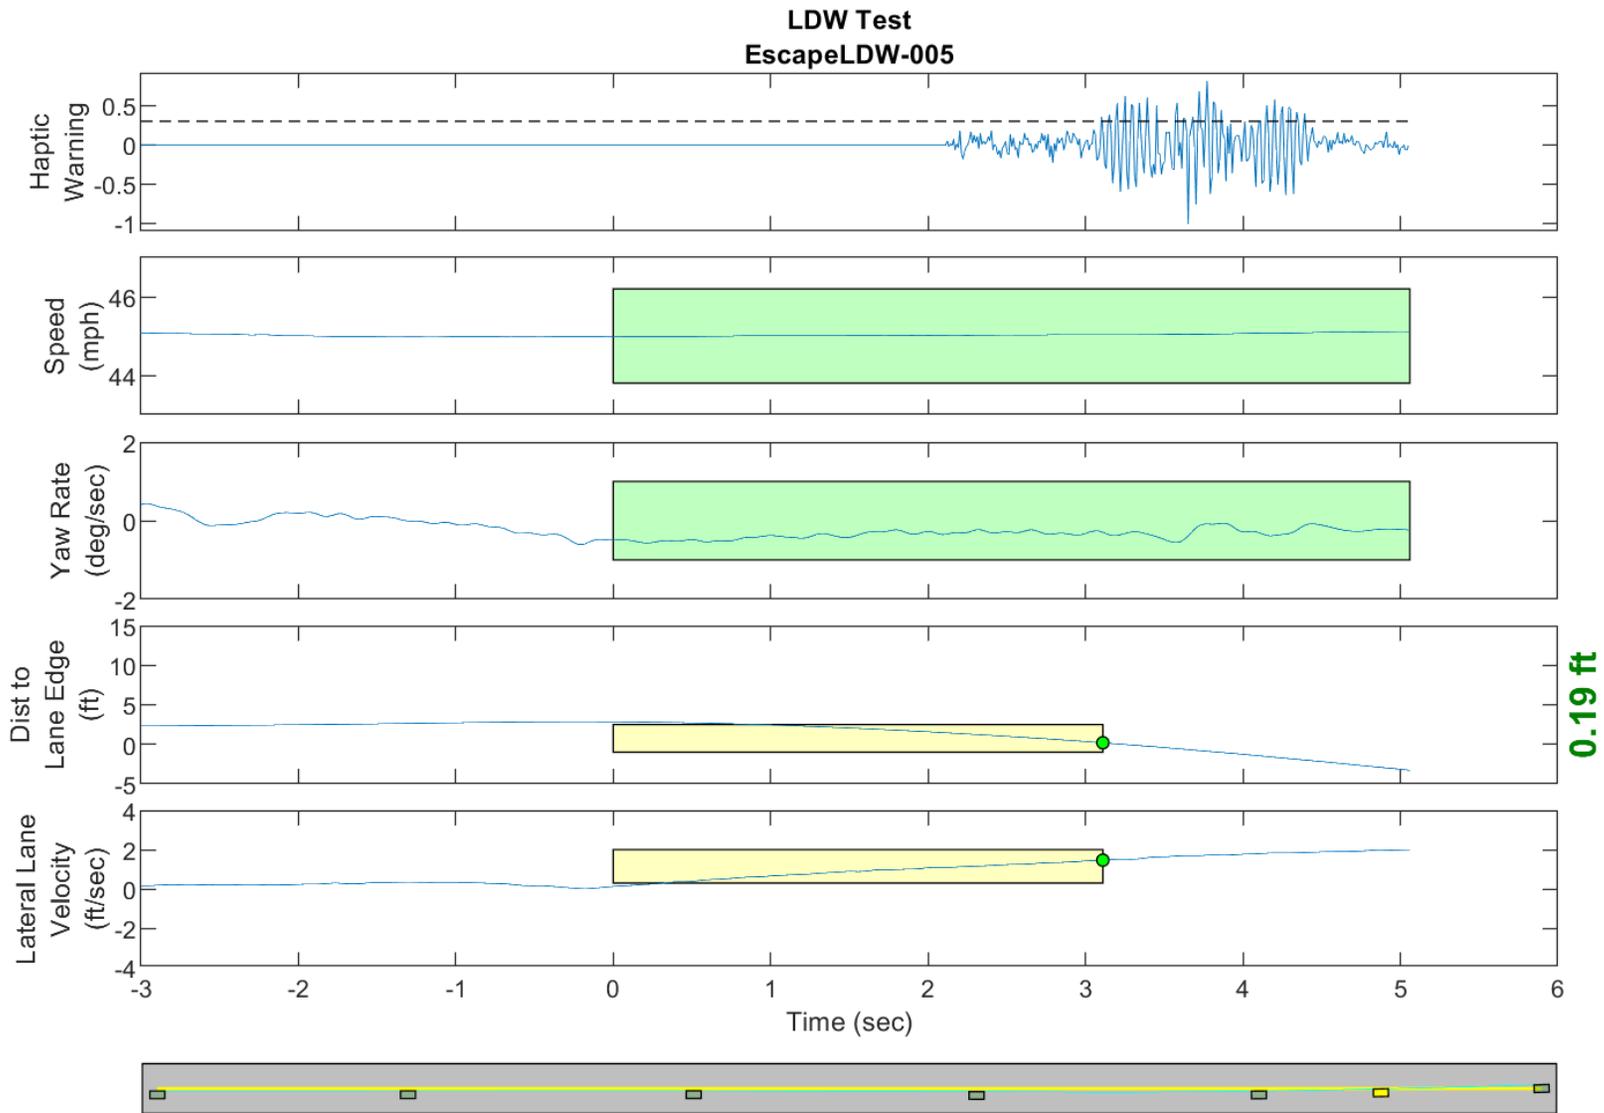


GPS Fix Type: RTK Fixed

Figure D13. Time History for Run 05, Botts Dots, Left Departure, Haptic Warning

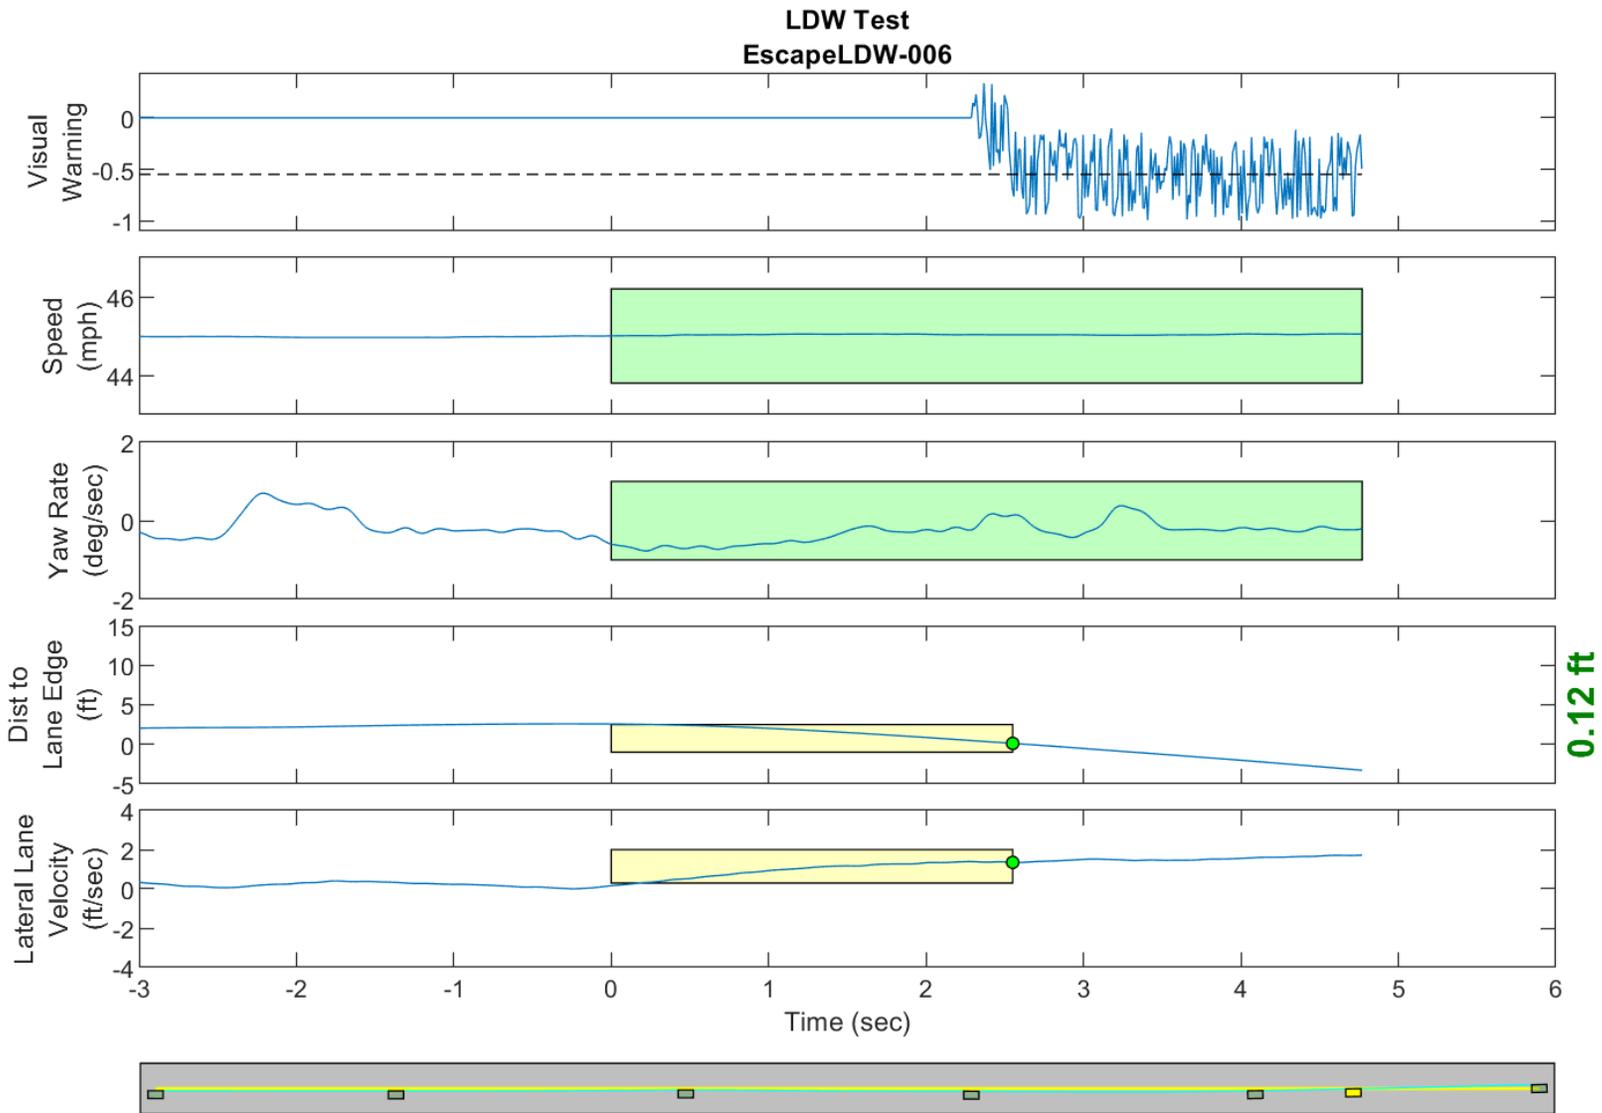


GPS Fix Type: RTK Fixed

Figure D14. Time History for Run 06, Botts Dots, Left Departure, Visual Warning

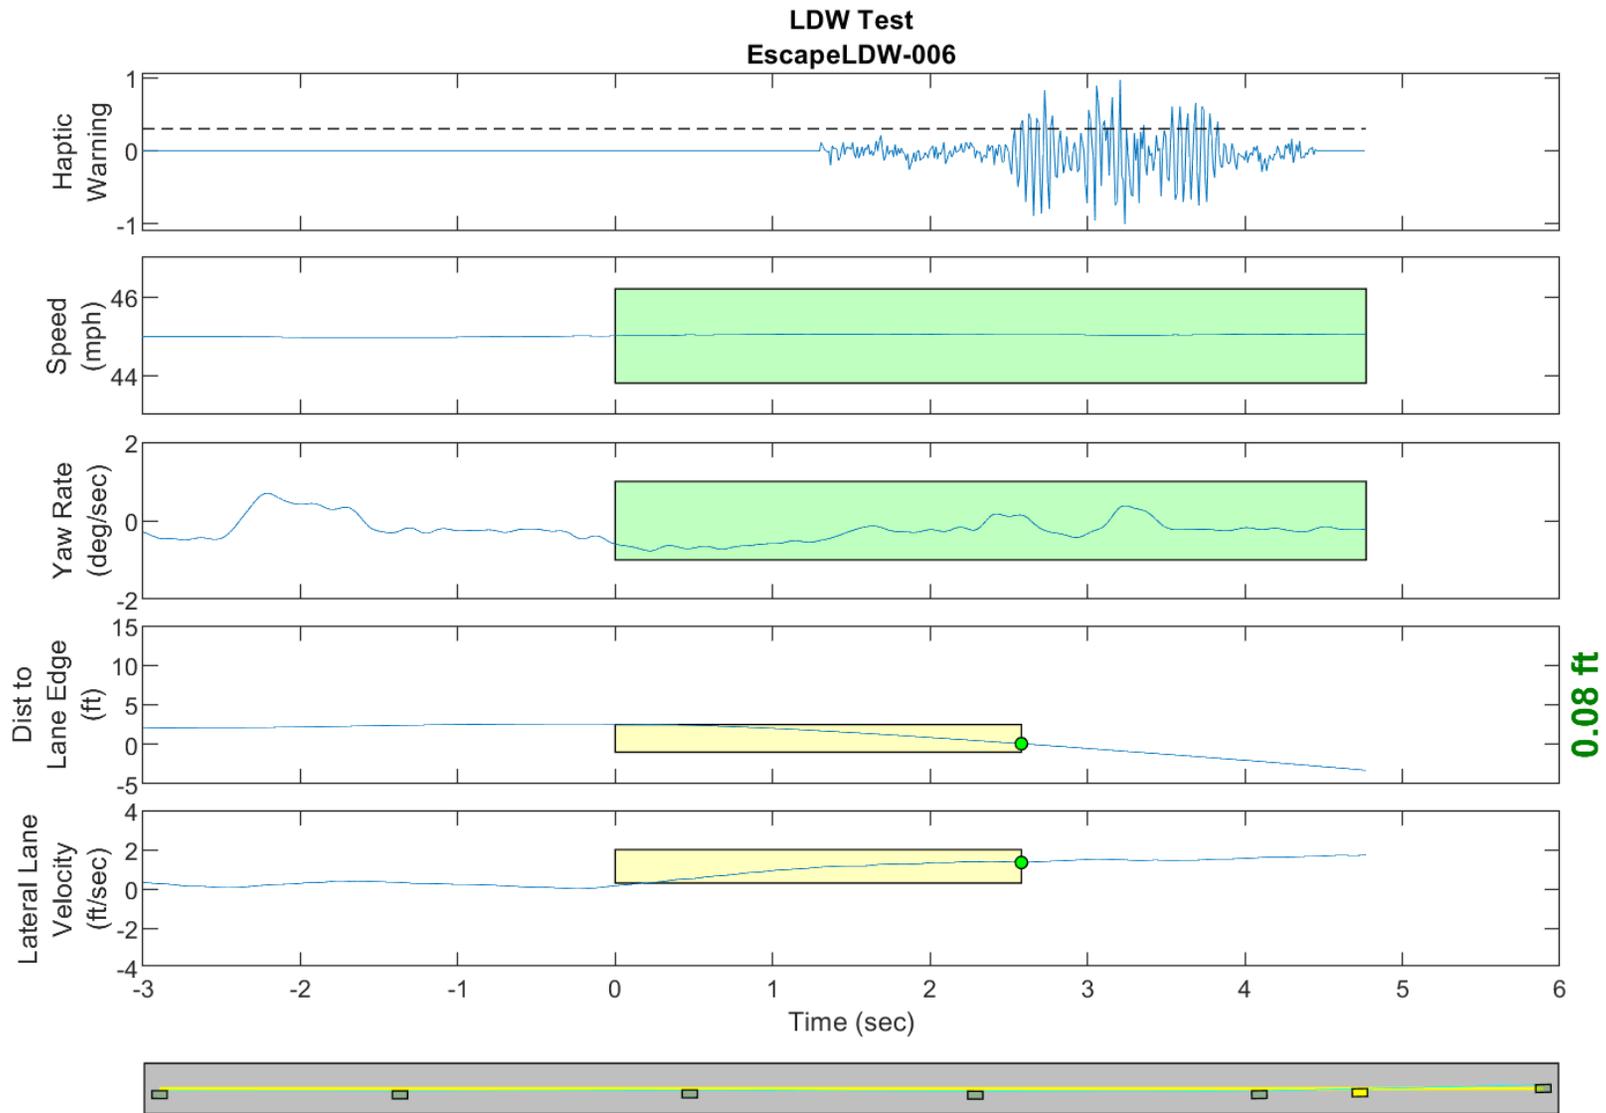


GPS Fix Type: RTK Fixed

Figure D15. Time History for Run 06, Botts Dots, Left Departure, Haptic Warning

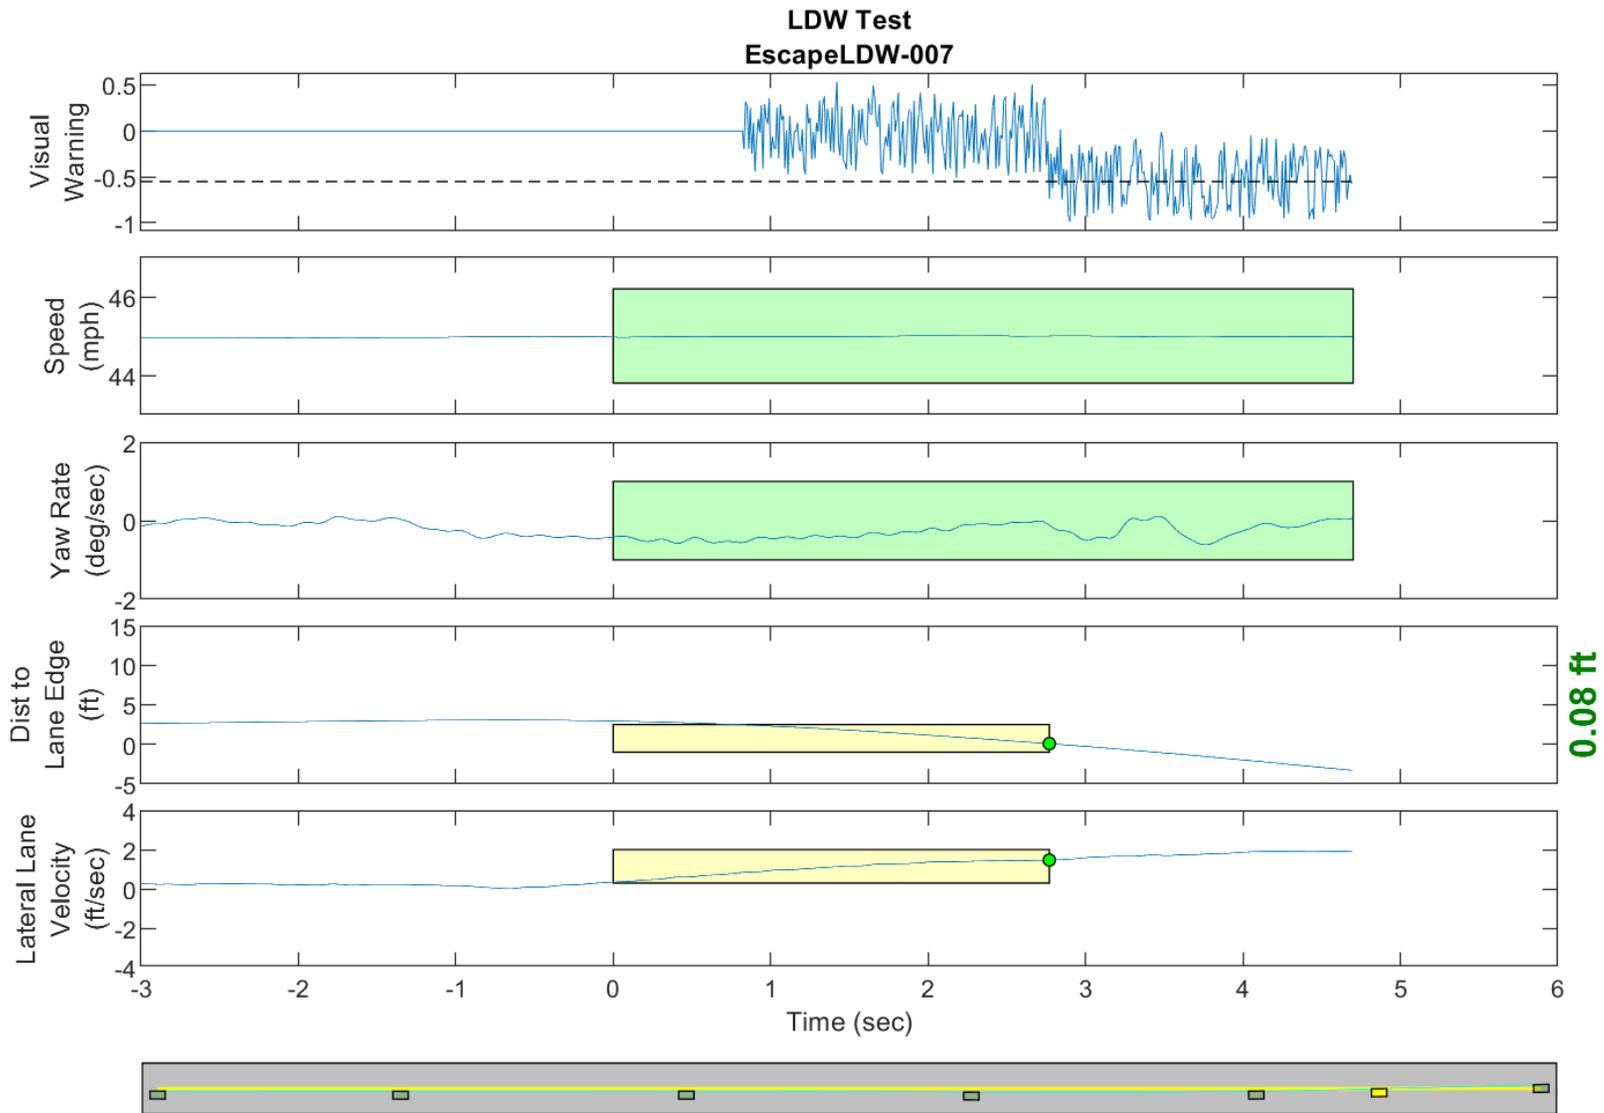


GPS Fix Type: RTK Fixed

Figure D16. Time History for Run 07, Botts Dots, Left Departure, Visual Warning

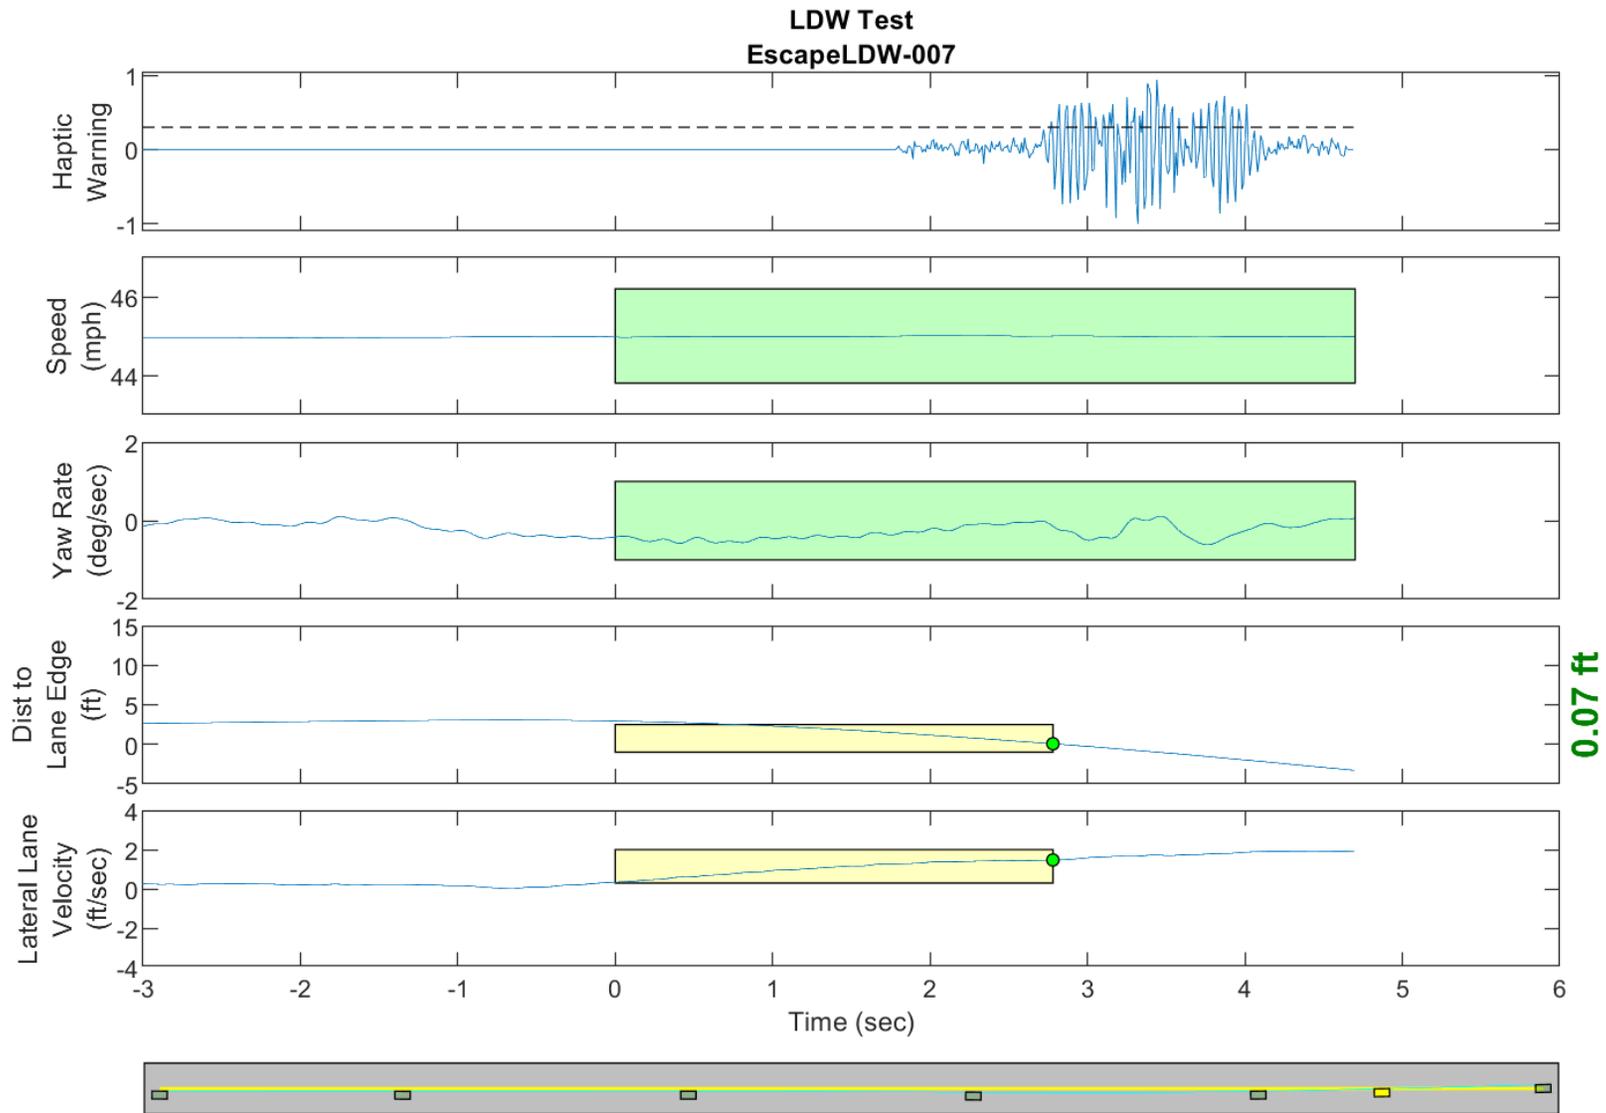


GPS Fix Type: RTK Fixed

Figure D17. Time History for Run 07, Botts Dots, Left Departure, Haptic Warning

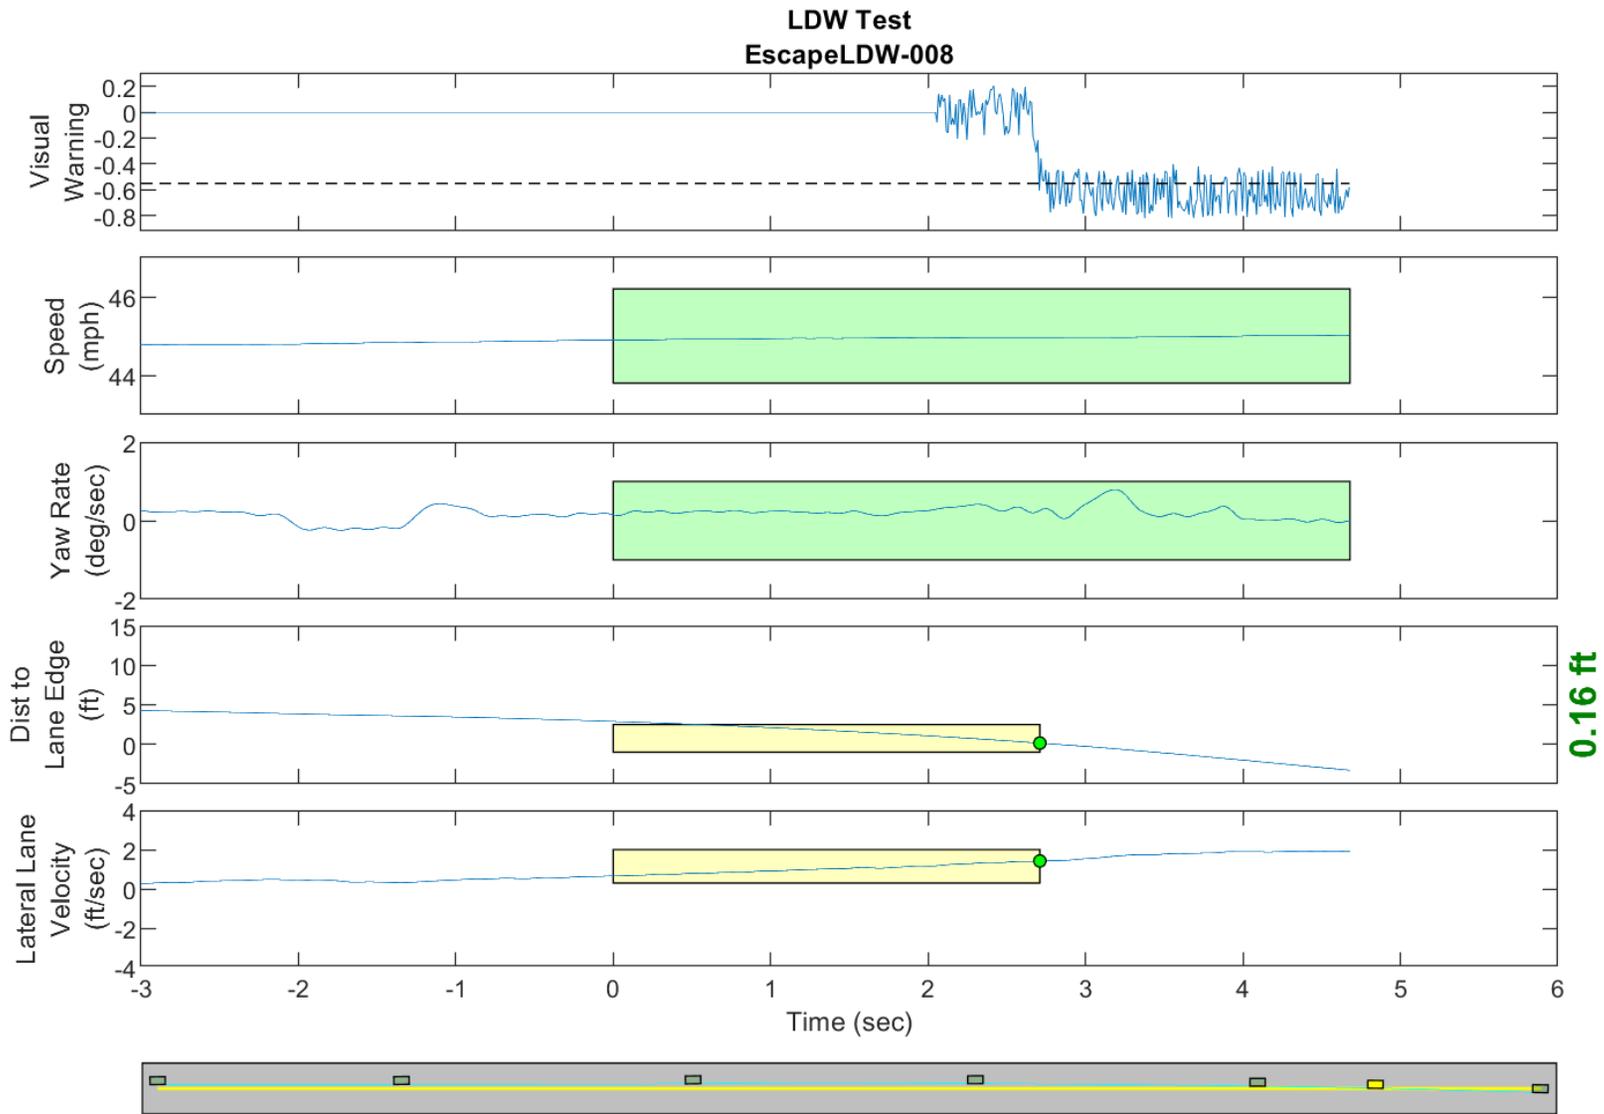


GPS Fix Type: RTK Fixed

Figure D18. Time History for Run 08, Botts Dots, Right Departure, Visual Warning

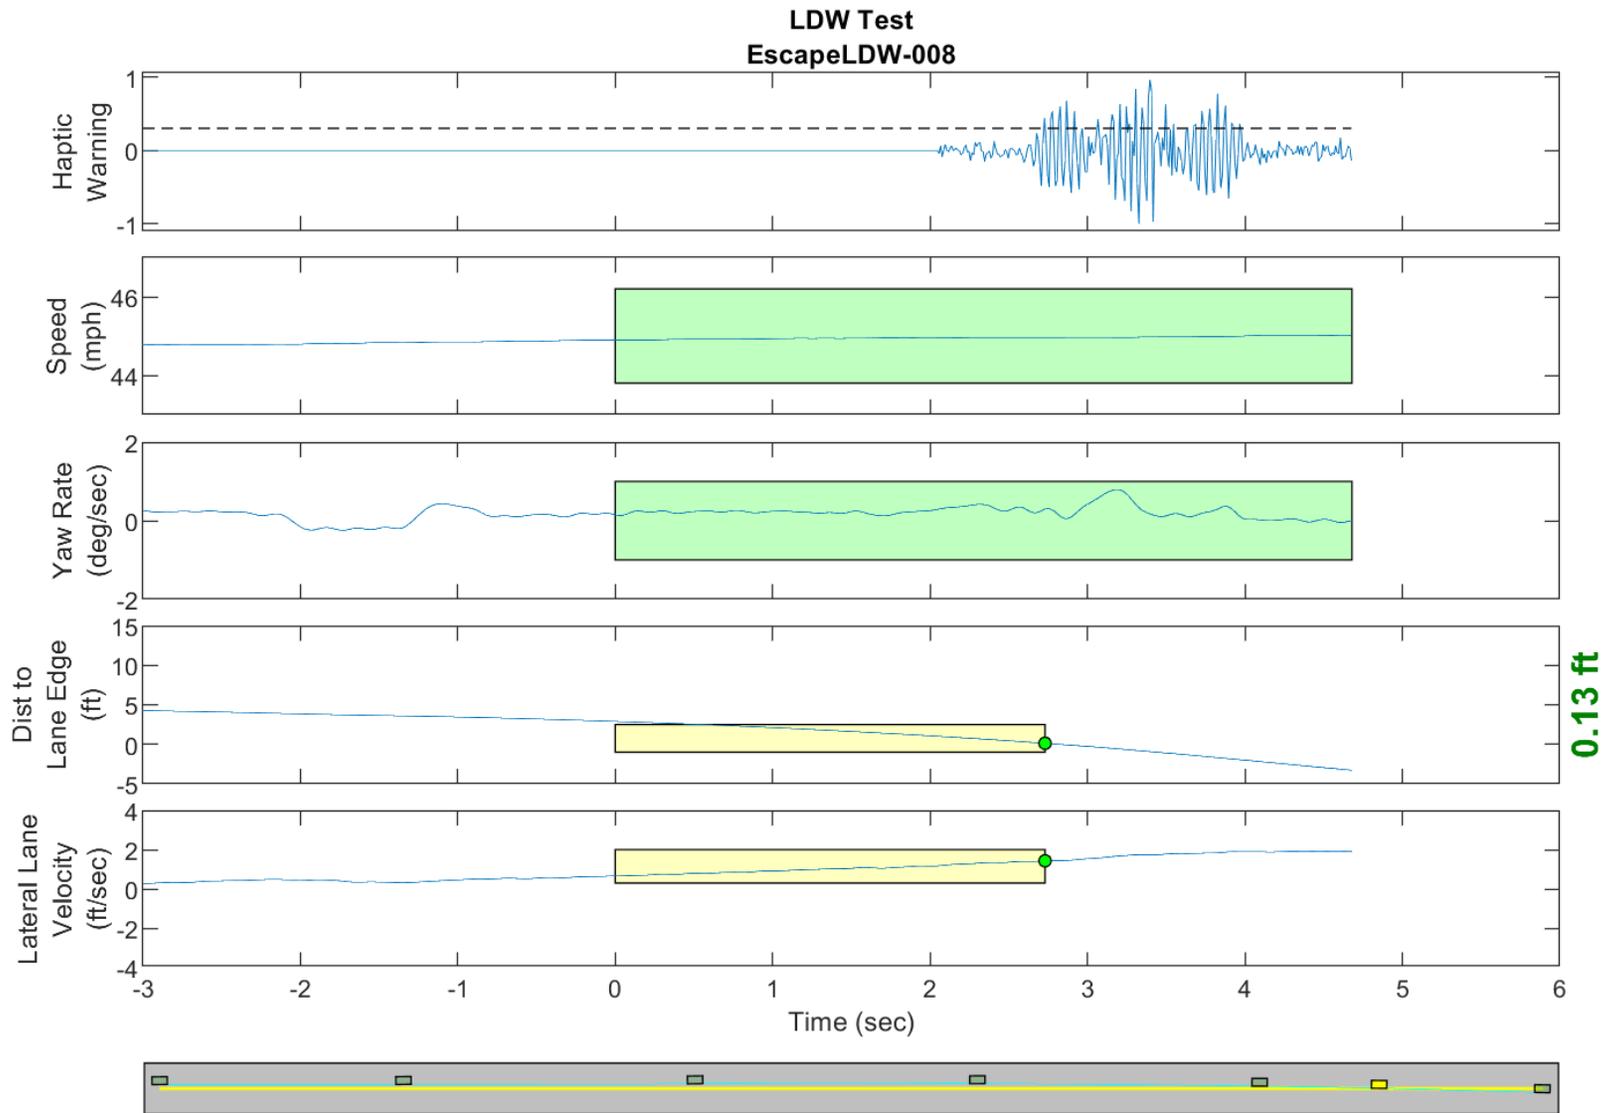


GPS Fix Type: RTK Fixed

Figure D19. Time History for Run 08, Botts Dots, Right Departure, Haptic Warning

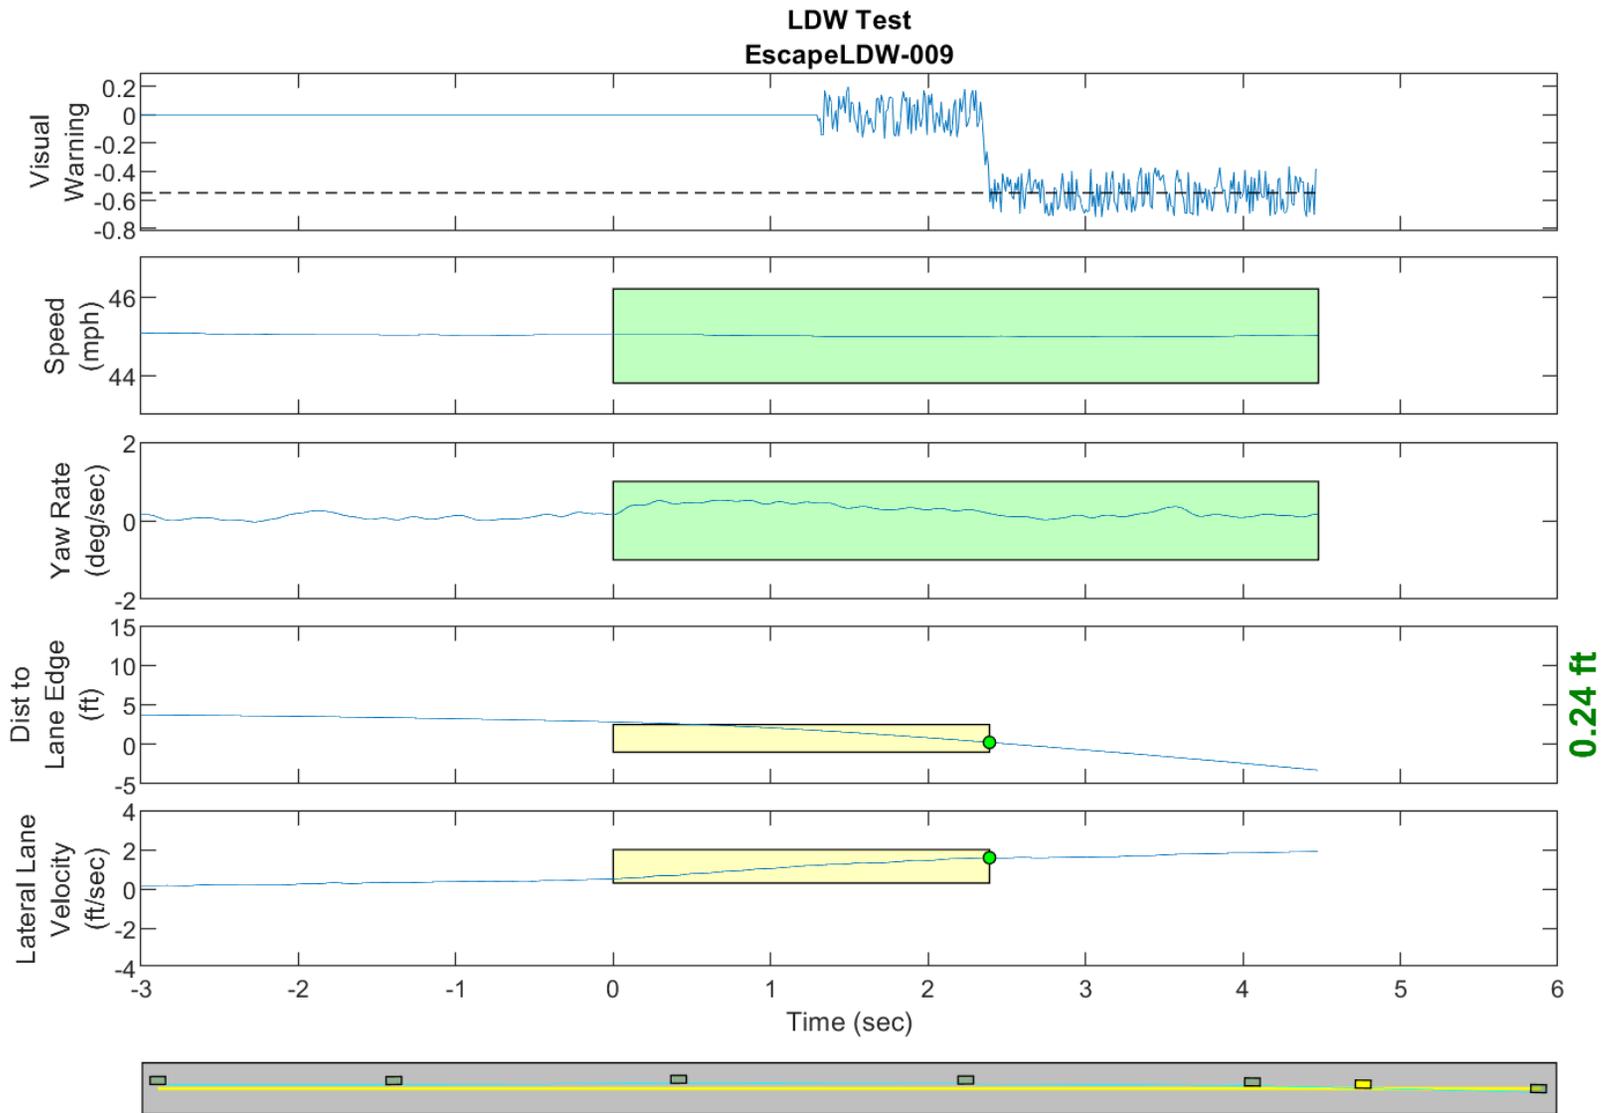


GPS Fix Type: RTK Fixed

Figure D20. Time History for Run 09, Botts Dots, Right Departure, Visual Warning

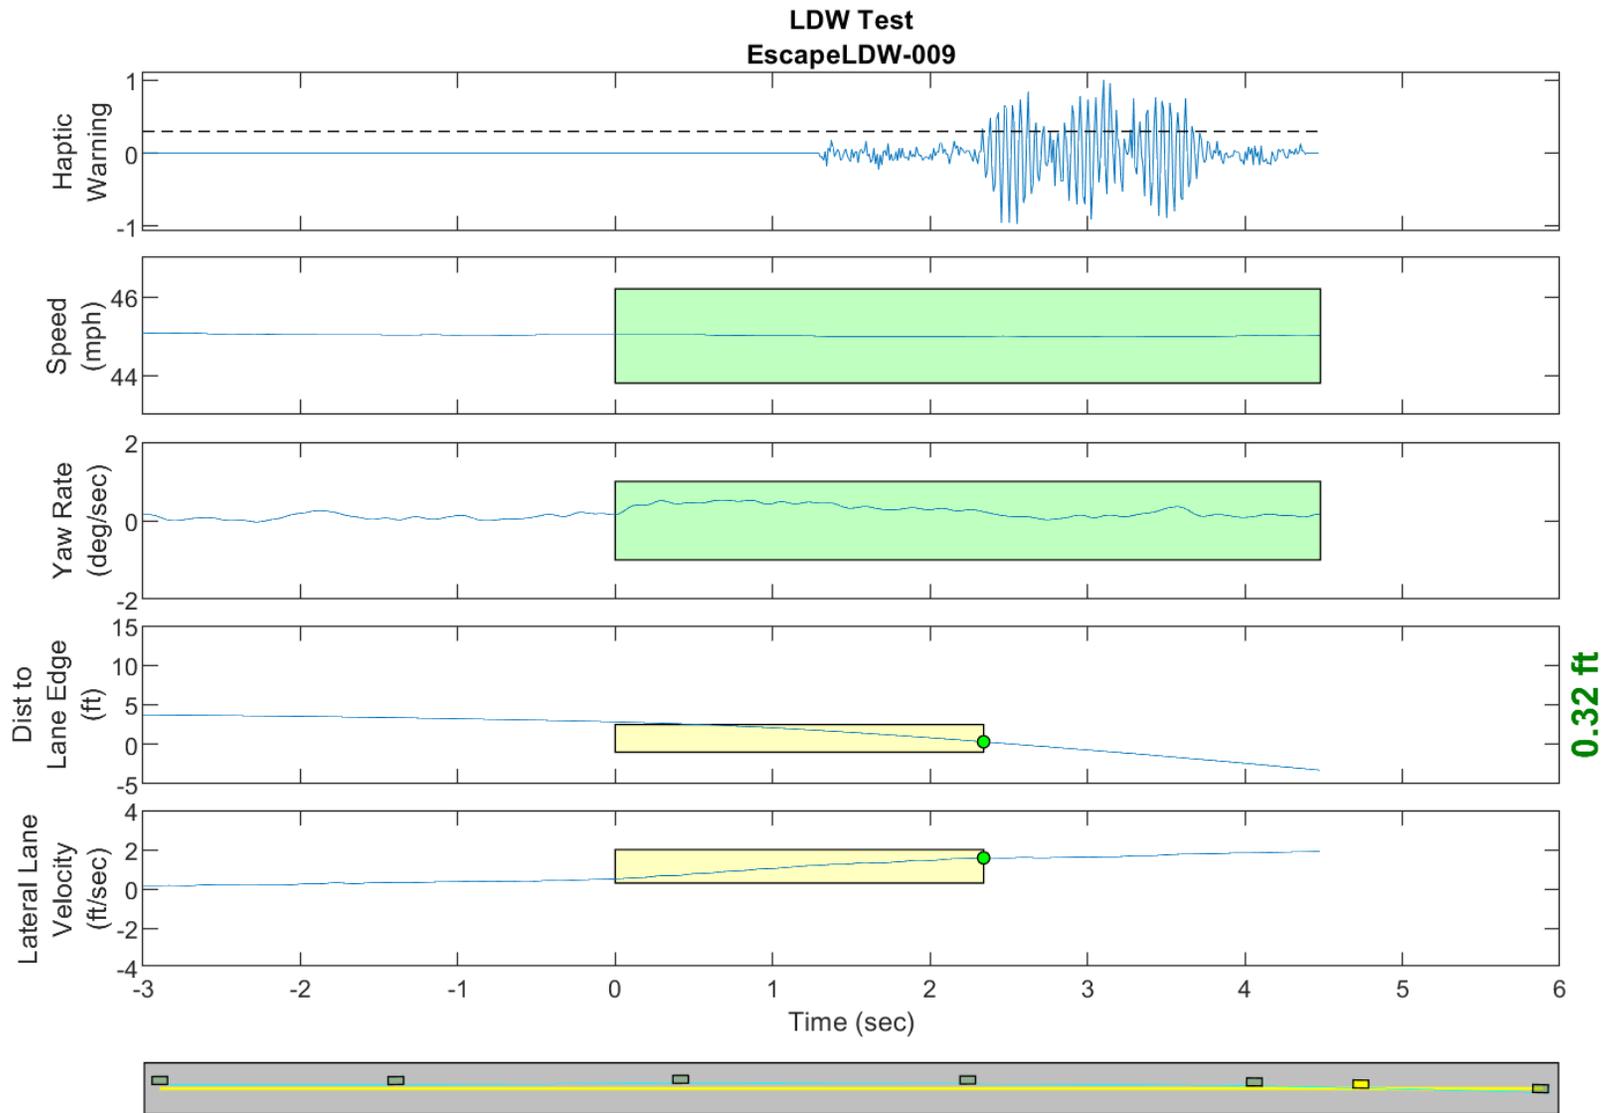


GPS Fix Type: RTK Fixed

Figure D21. Time History for Run 09, Botts Dots, Right Departure, Haptic Warning

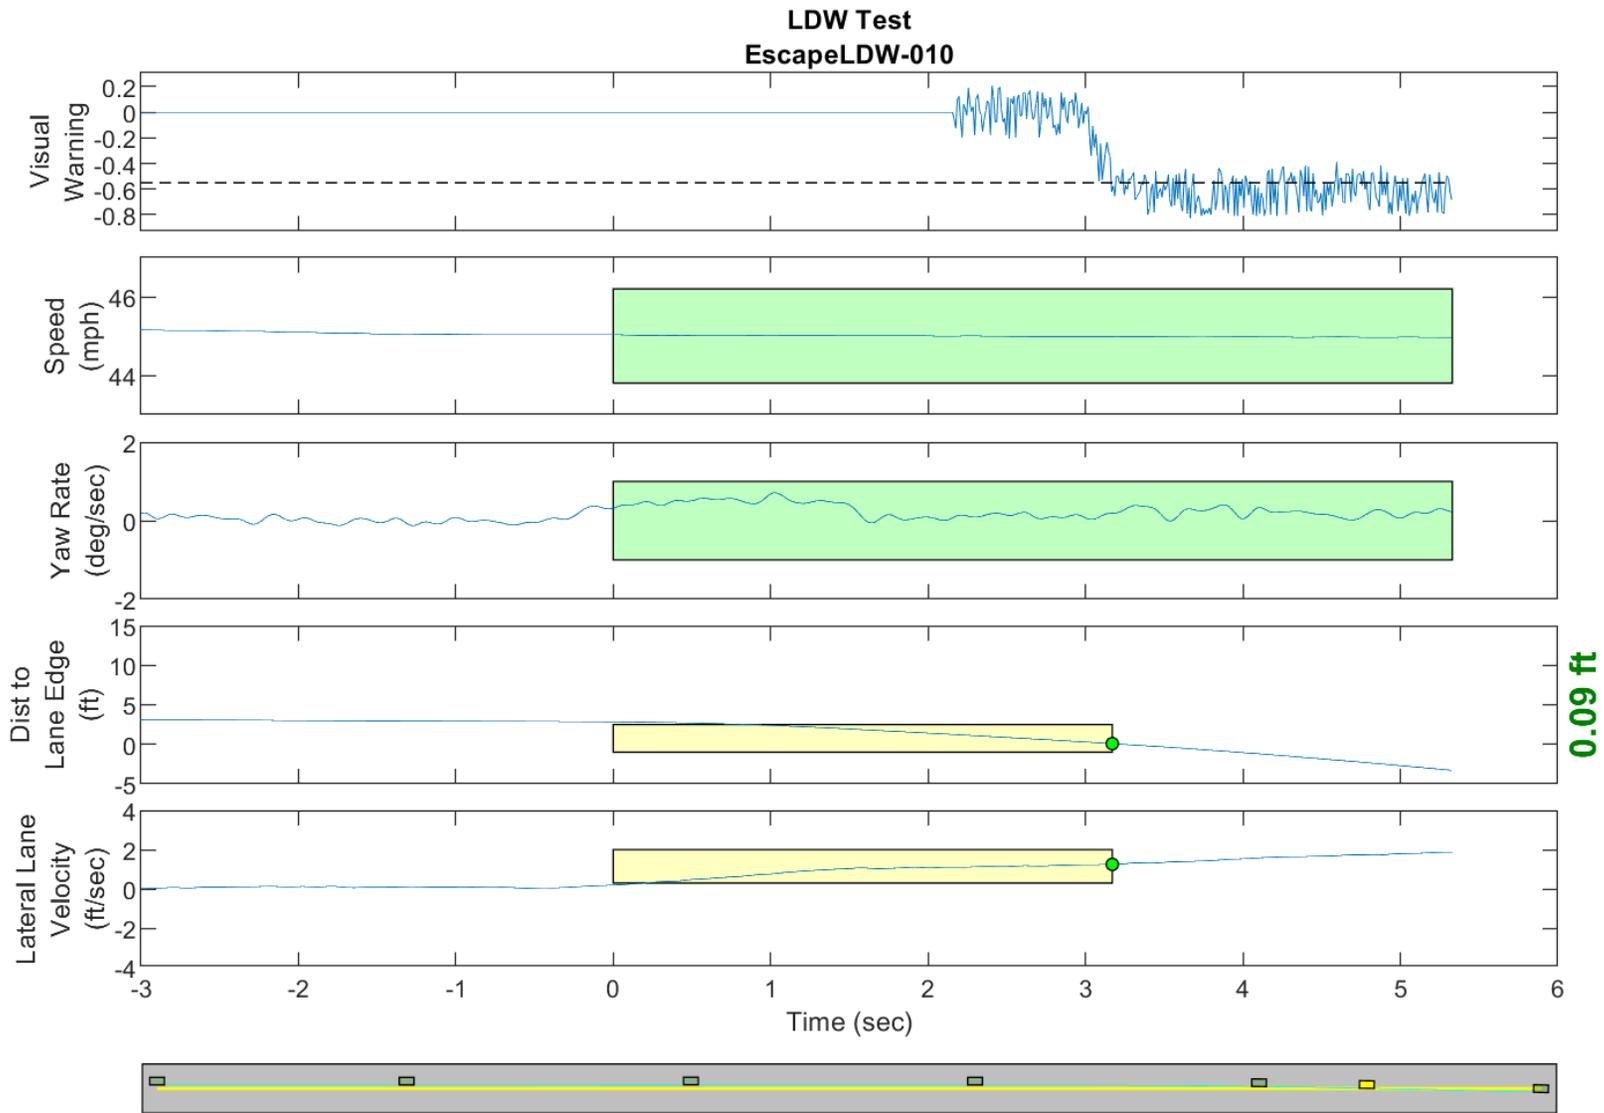


GPS Fix Type: RTK Fixed

Figure D22. Time History for Run 10, Botts Dots, Right Departure, Visual Warning

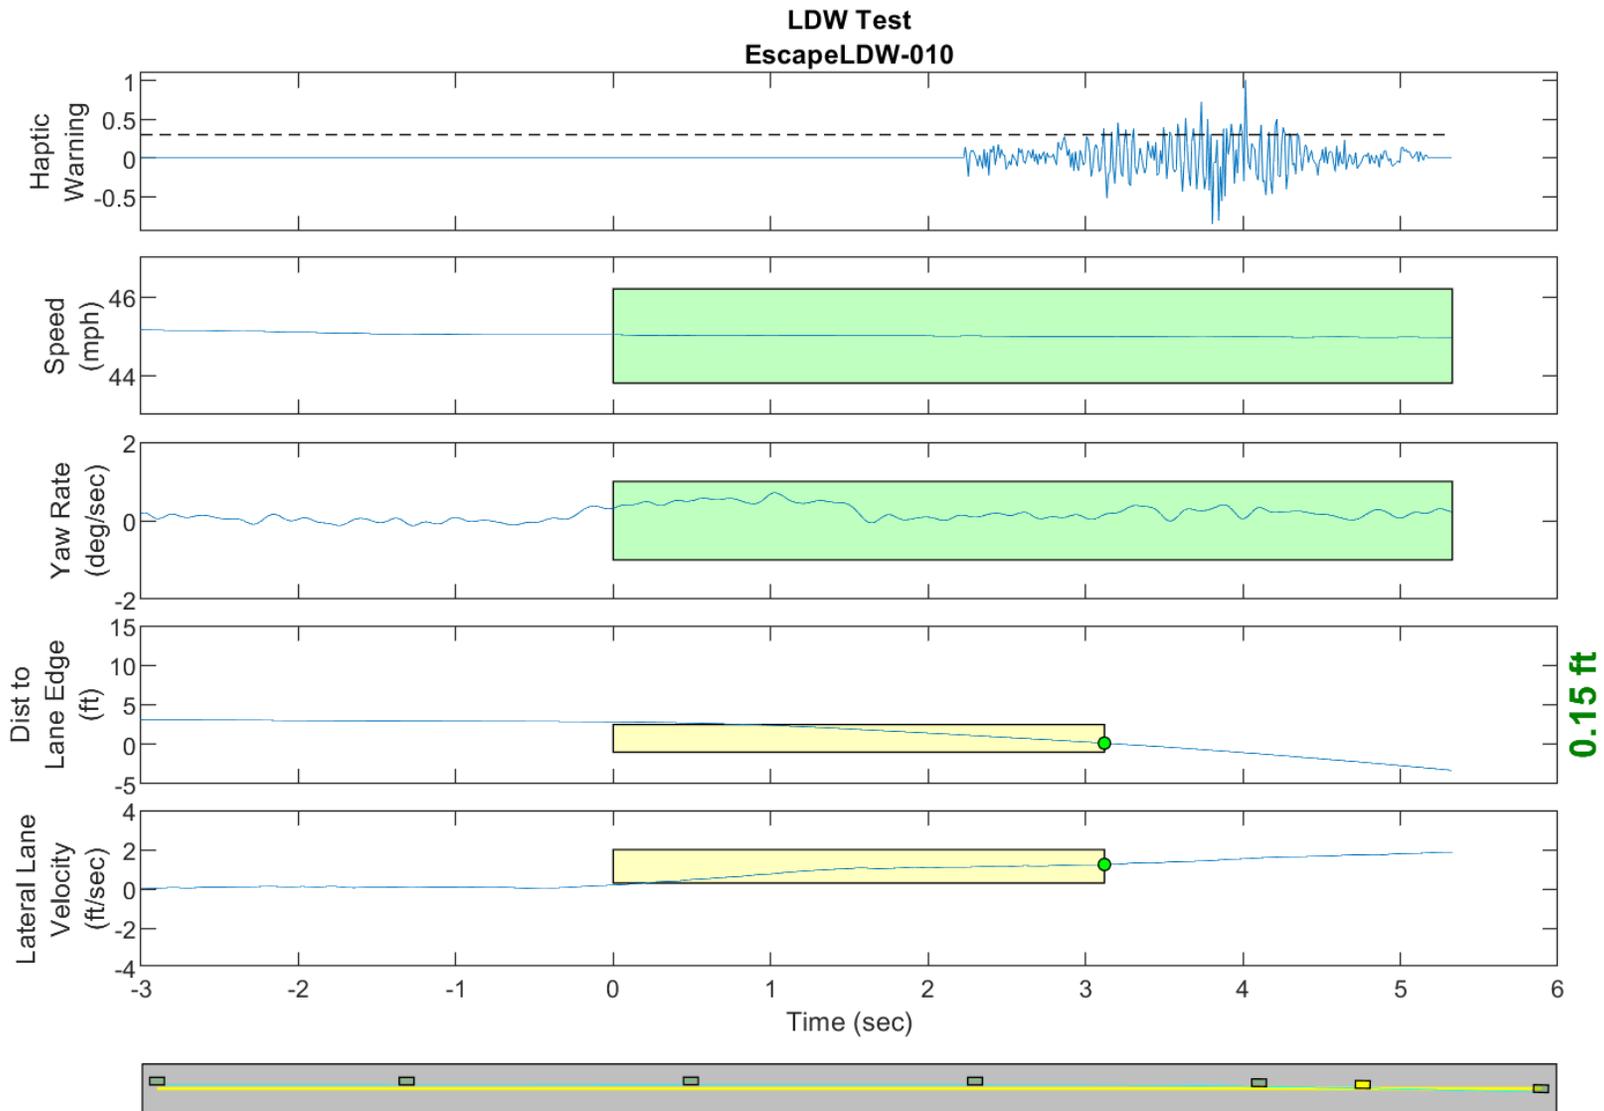


GPS Fix Type: RTK Fixed

Figure D23. Time History for Run 10, Botts Dots, Right Departure, Haptic Warning

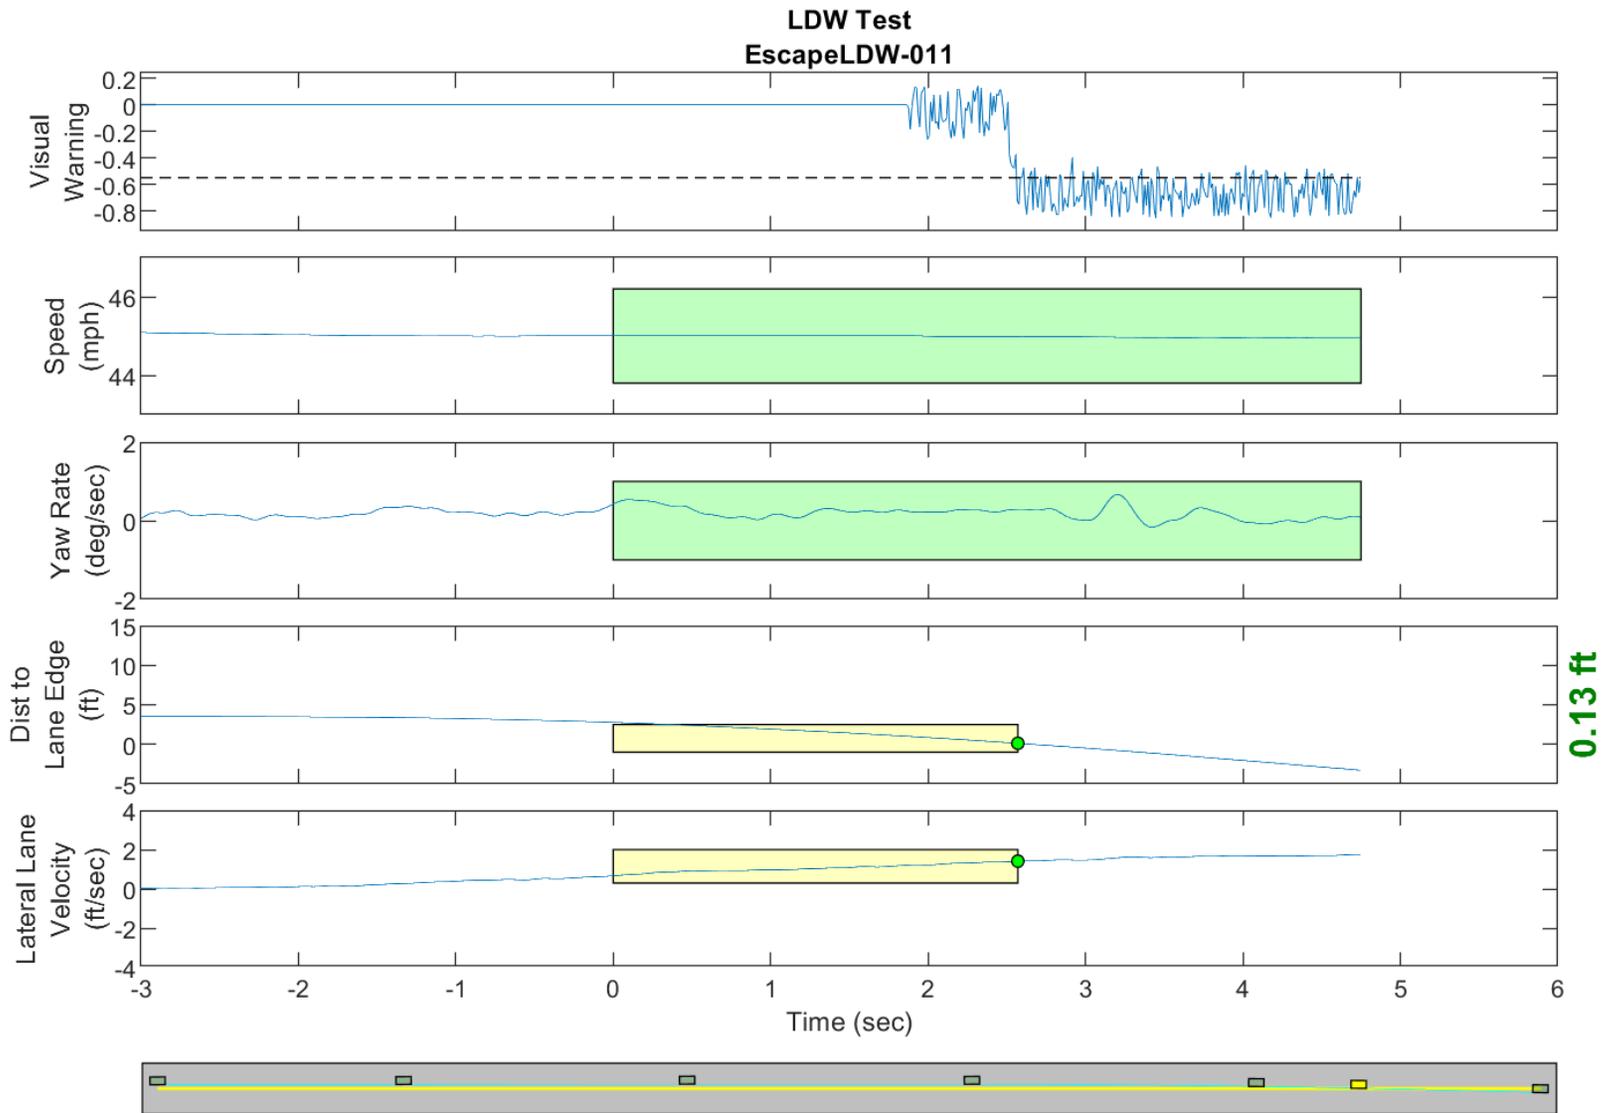


GPS Fix Type: RTK Fixed

Figure D24. Time History for Run 11, Botts Dots, Right Departure, Visual Warning

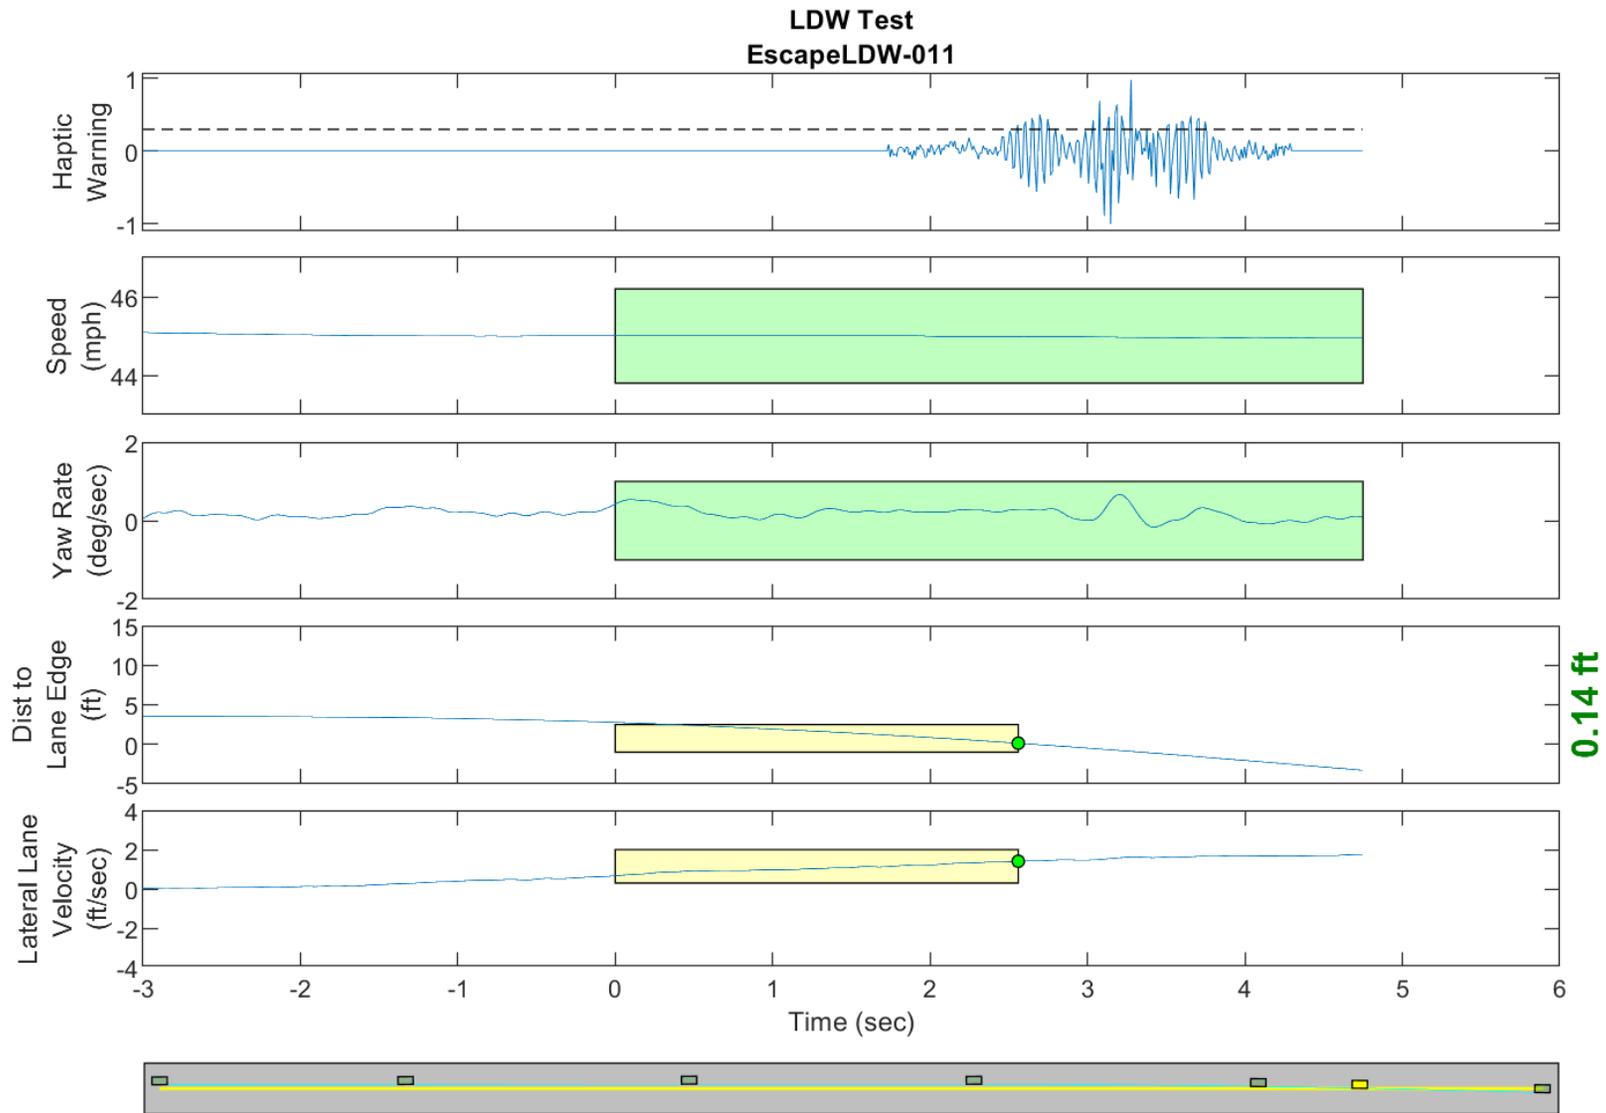


GPS Fix Type: RTK Fixed

Figure D25. Time History for Run 11, Botts Dots, Right Departure, Haptic Warning

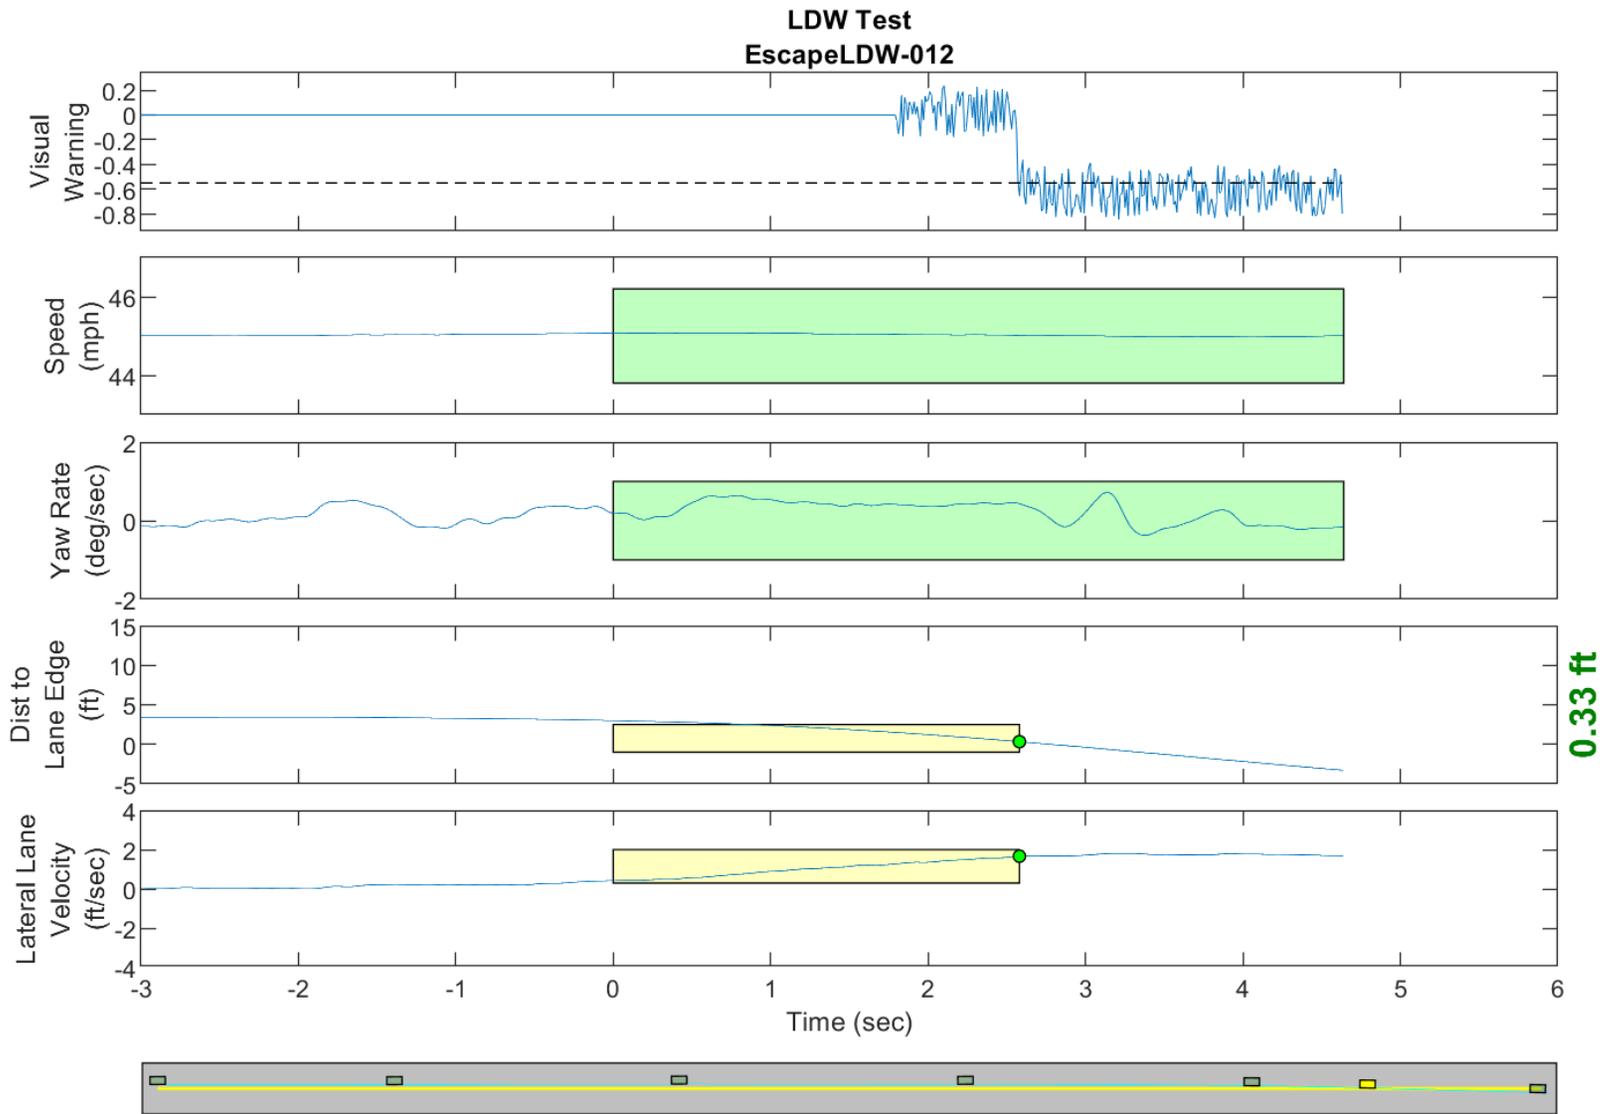


GPS Fix Type: RTK Fixed

Figure D26. Time History for Run 12, Botts Dots, Right Departure, Visual Warning

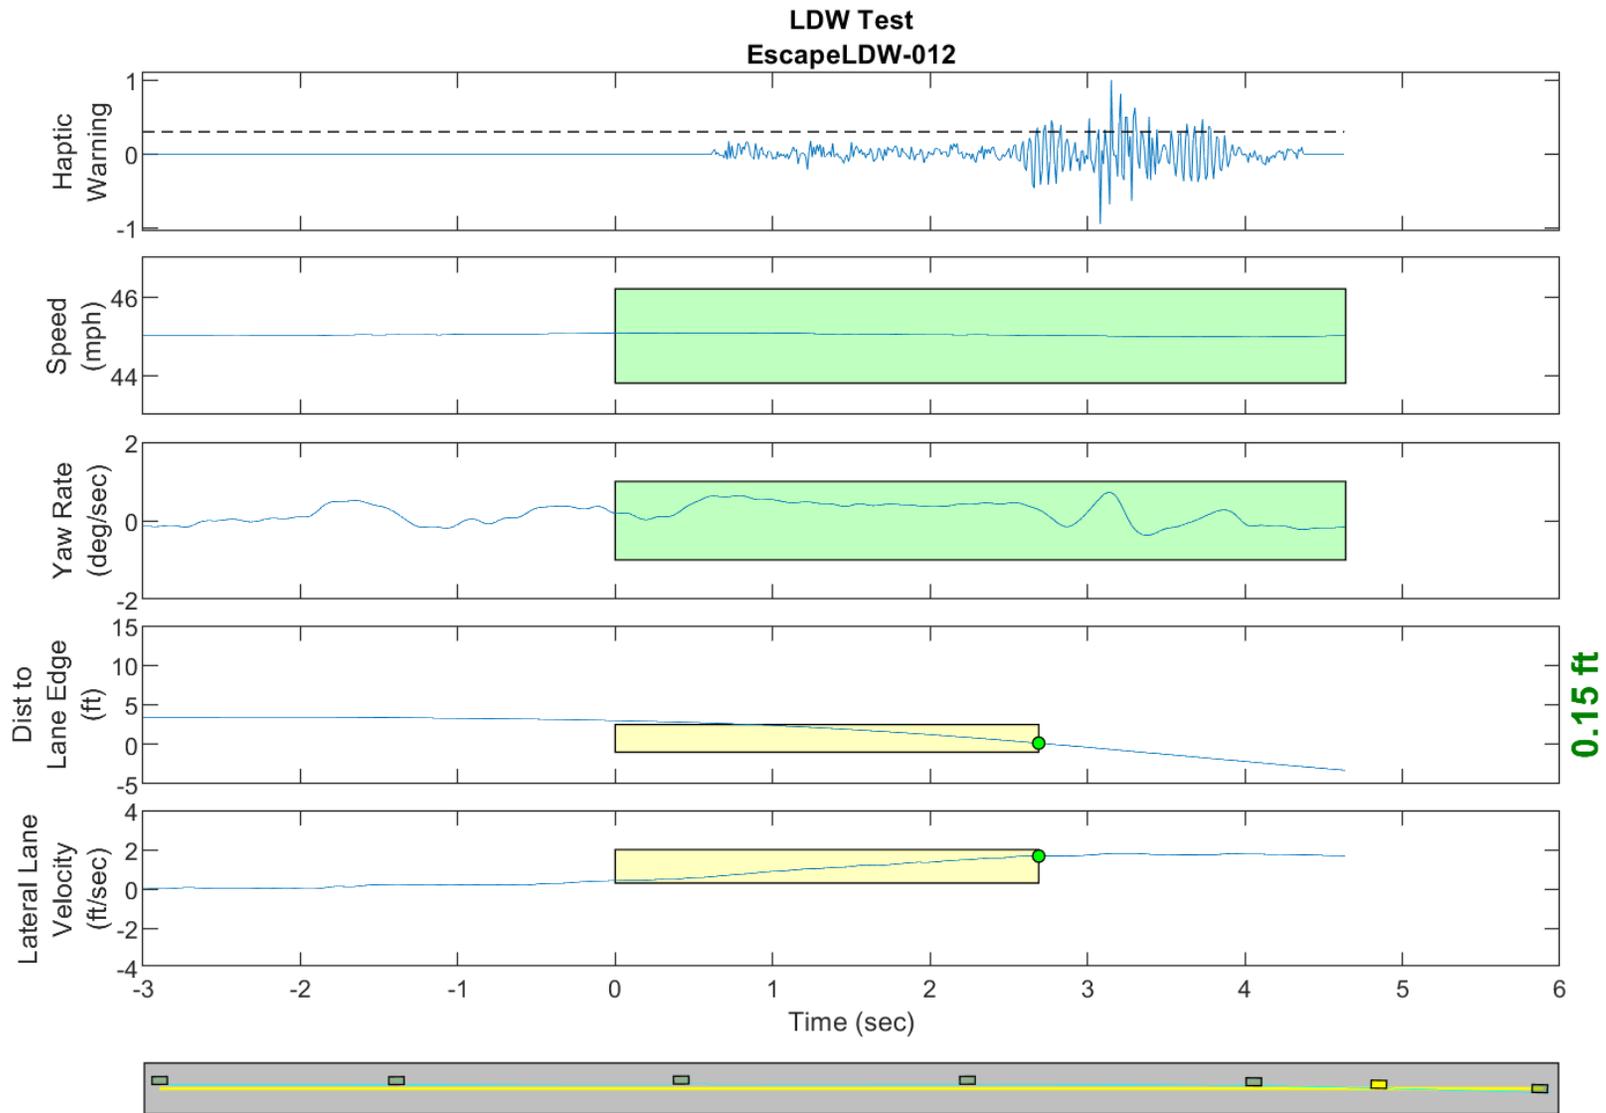


GPS Fix Type: RTK Fixed

Figure D27. Time History for Run 12, Botts Dots, Right Departure, Haptic Warning

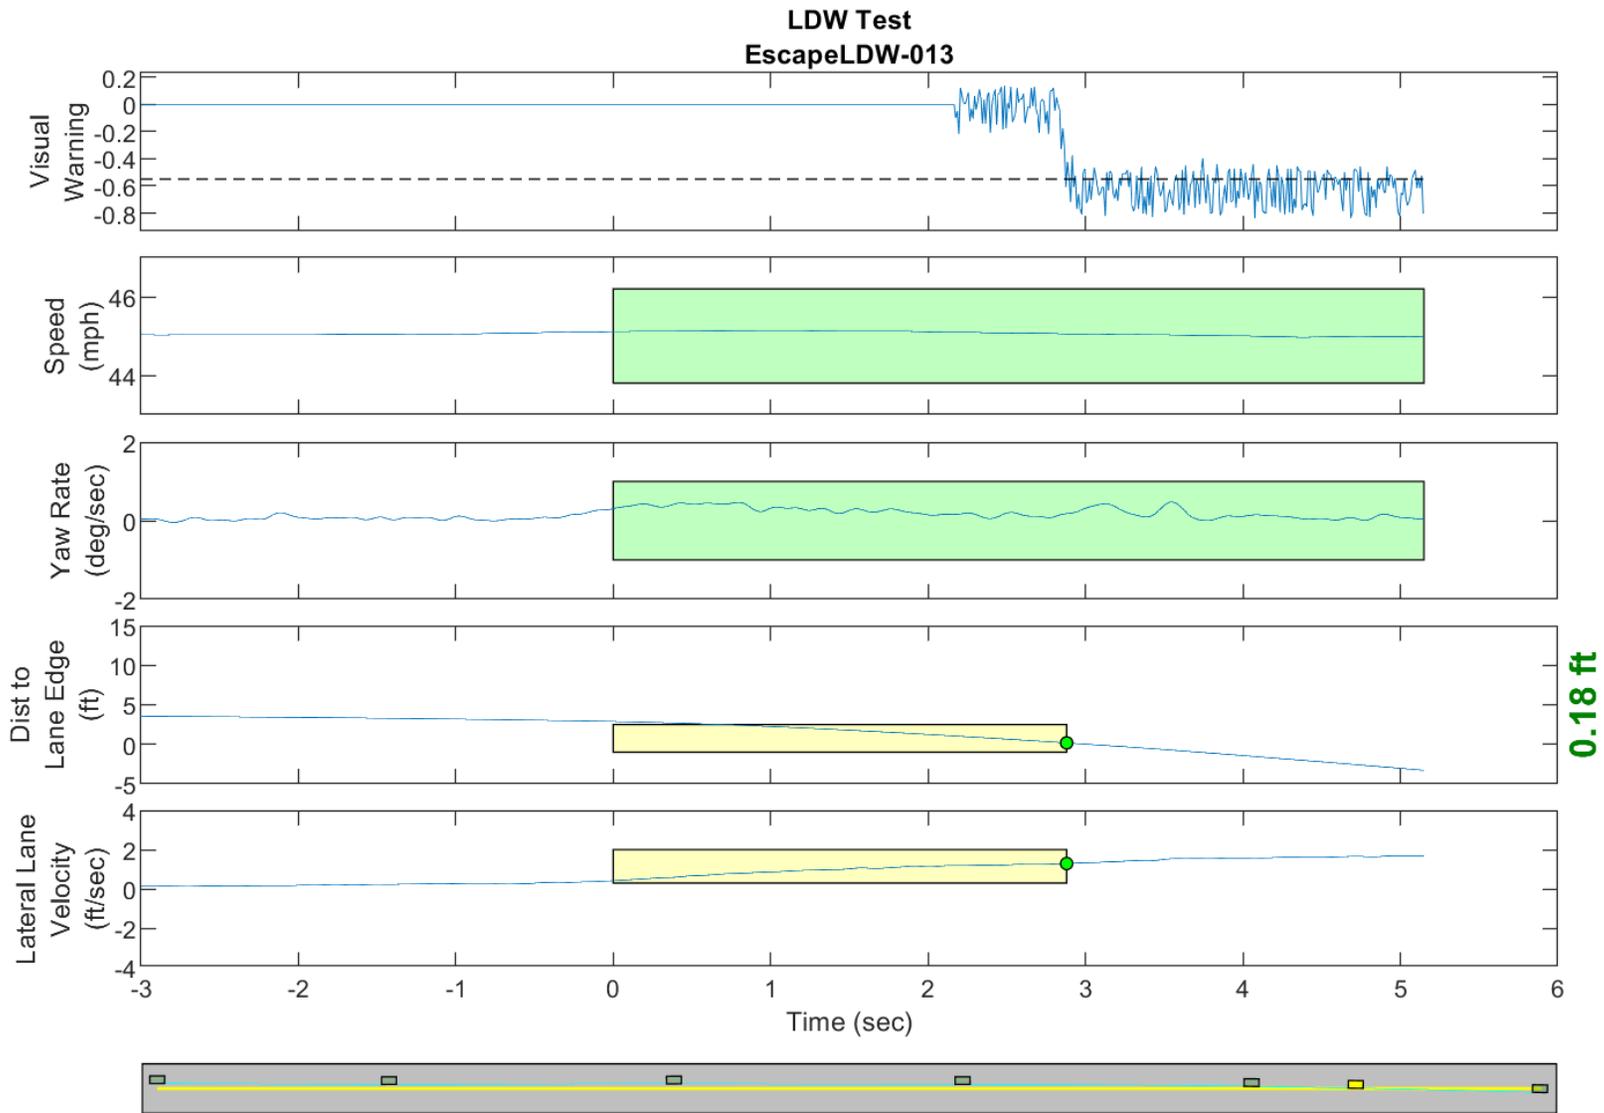


GPS Fix Type: RTK Fixed

Figure D28. Time History for Run 13, Botts Dots, Right Departure, Visual Warning

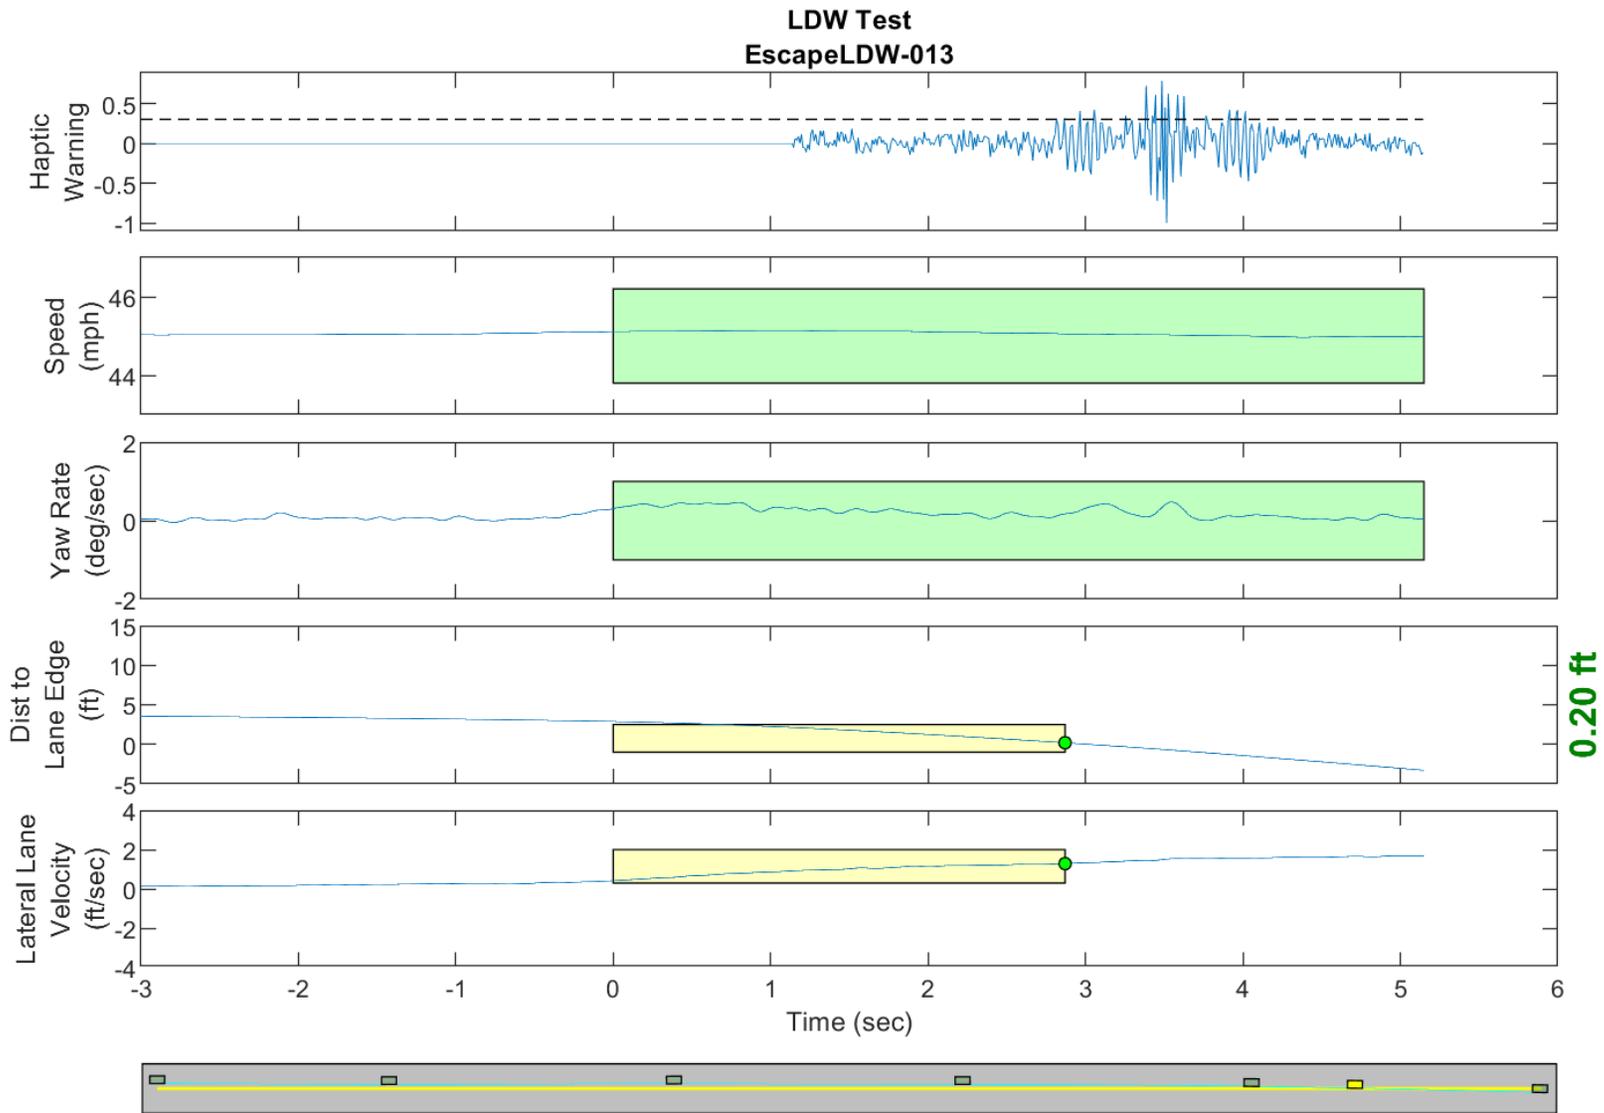


GPS Fix Type: RTK Fixed

Figure D29. Time History for Run 13, Botts Dots, Right Departure, Haptic Warning

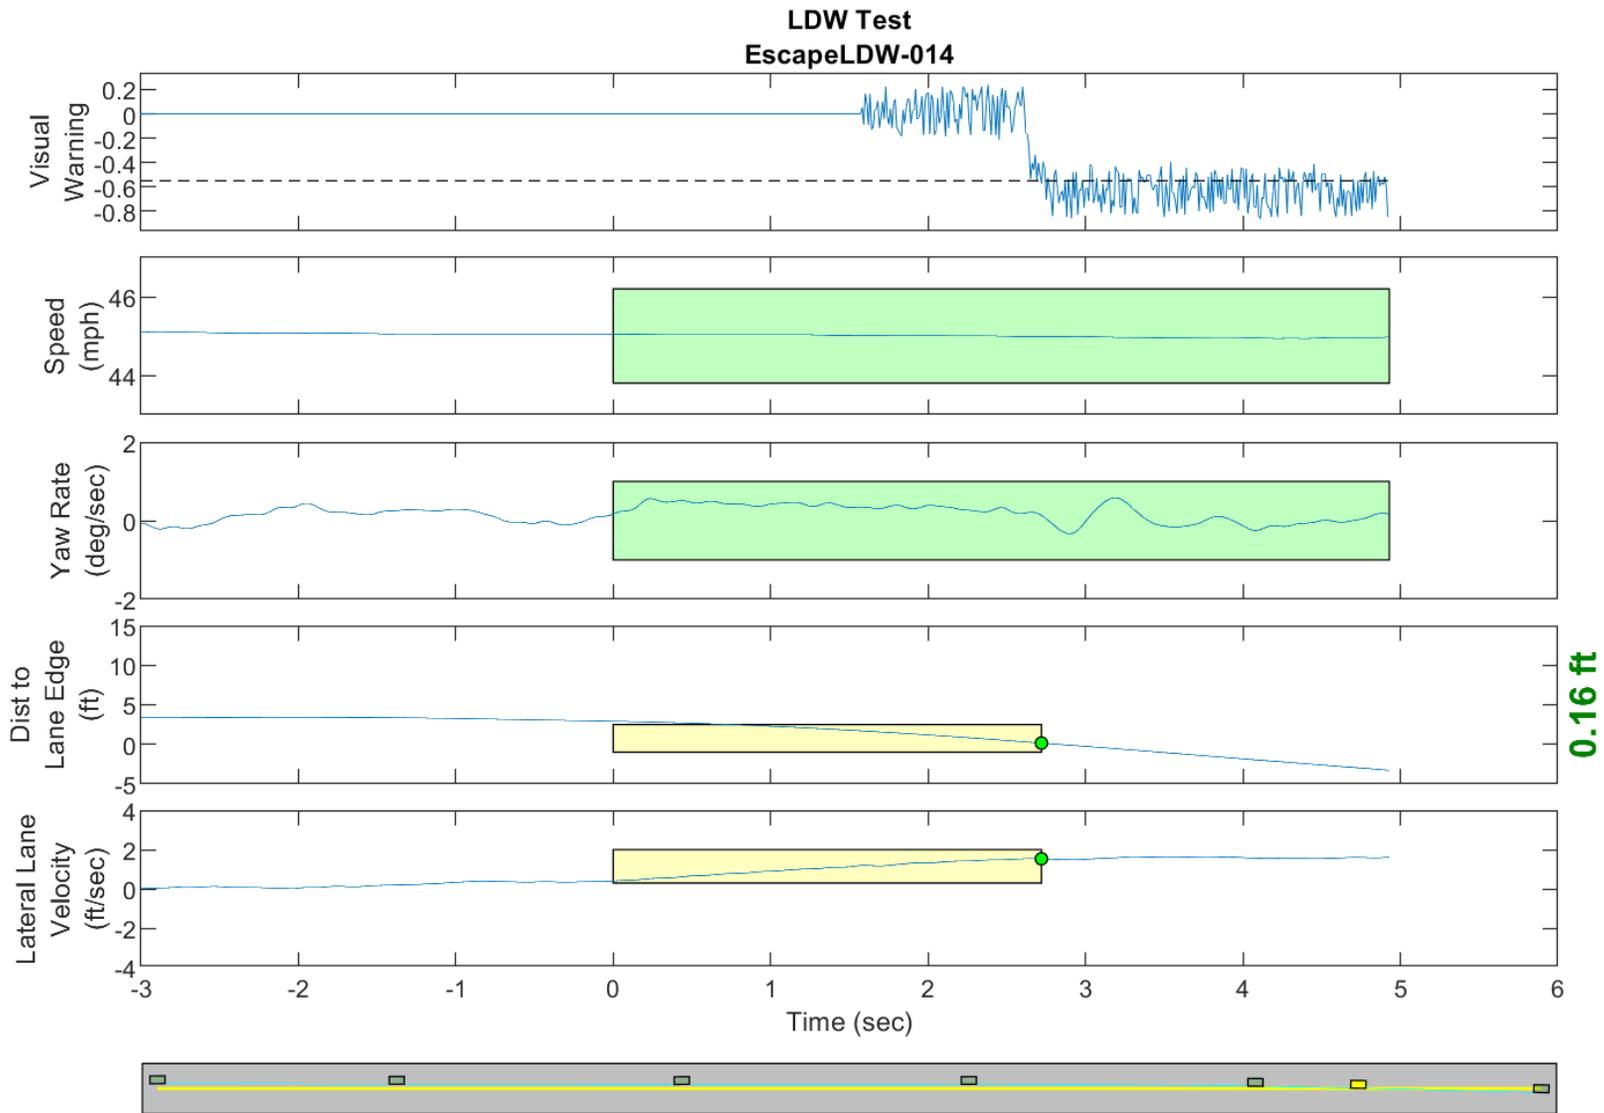


GPS Fix Type: RTK Fixed

Figure D30. Time History for Run 14, Botts Dots, Right Departure, Visual Warning

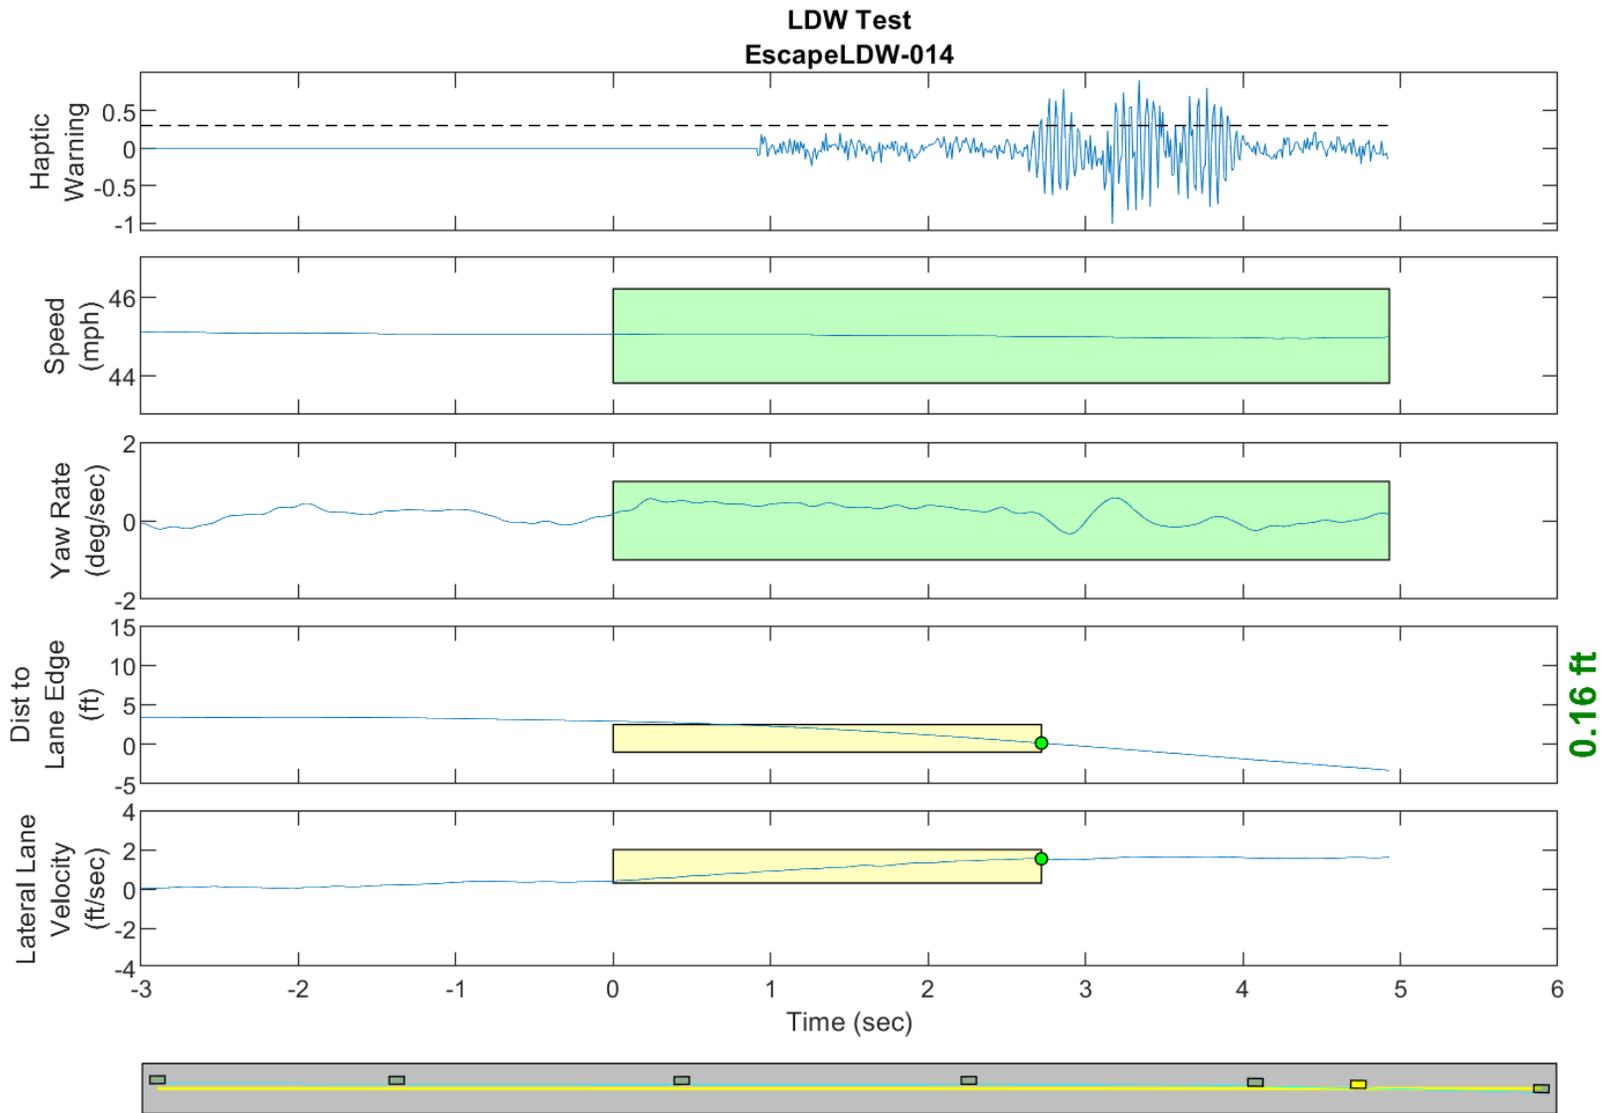


GPS Fix Type: RTK Fixed

Figure D31. Time History for Run 14, Botts Dots, Right Departure, Haptic Warning

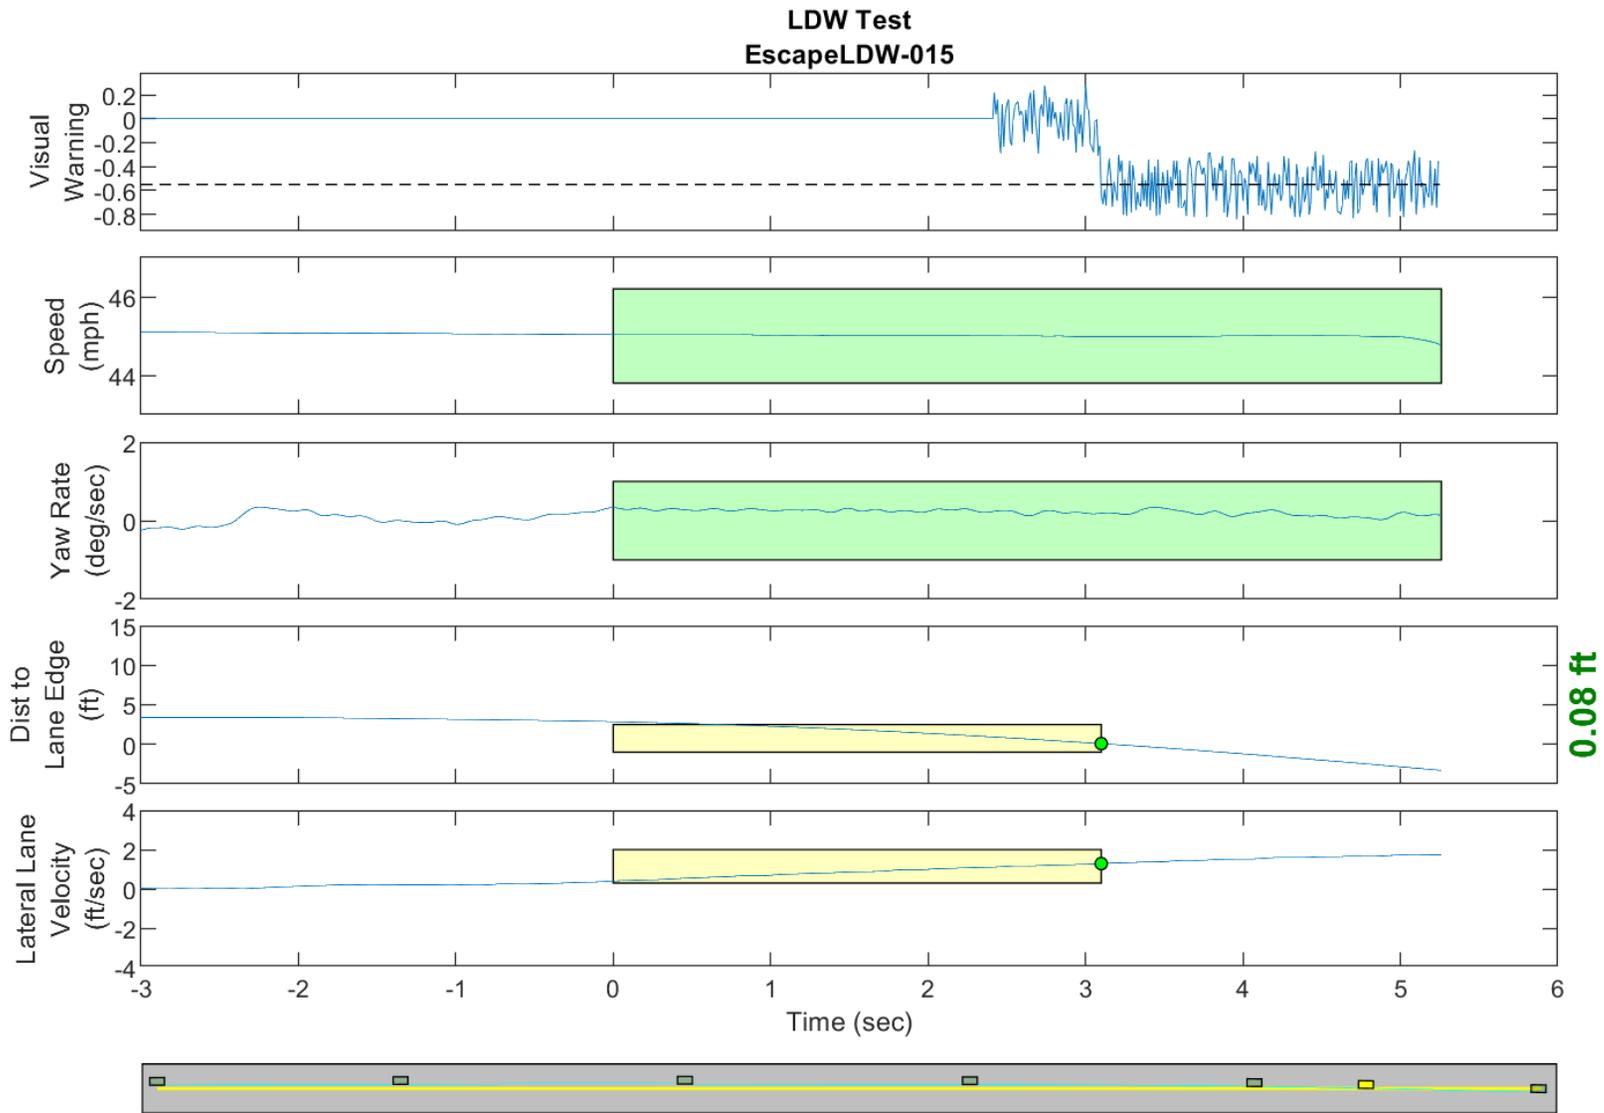


GPS Fix Type: RTK Fixed

Figure D32. Time History for Run 15, Solid Line, Right Departure, Visual Warning

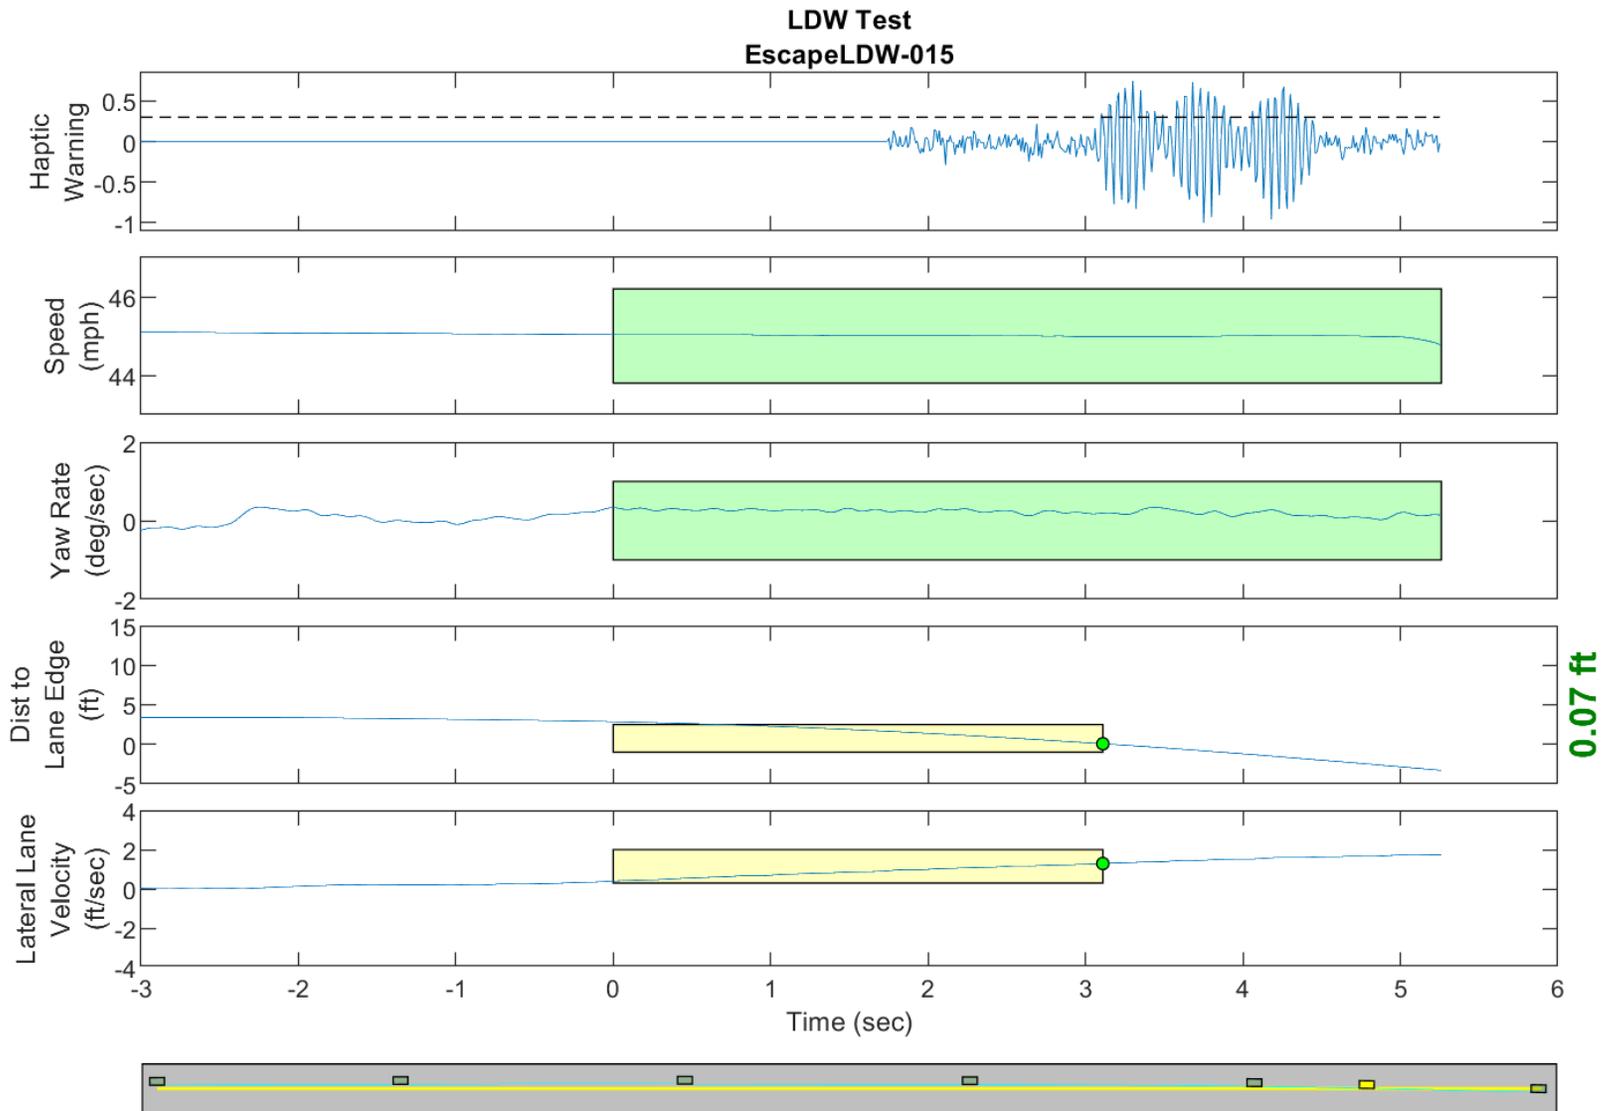


GPS Fix Type: RTK Fixed

Figure D33. Time History for Run 15, Solid Line, Right Departure, Haptic Warning

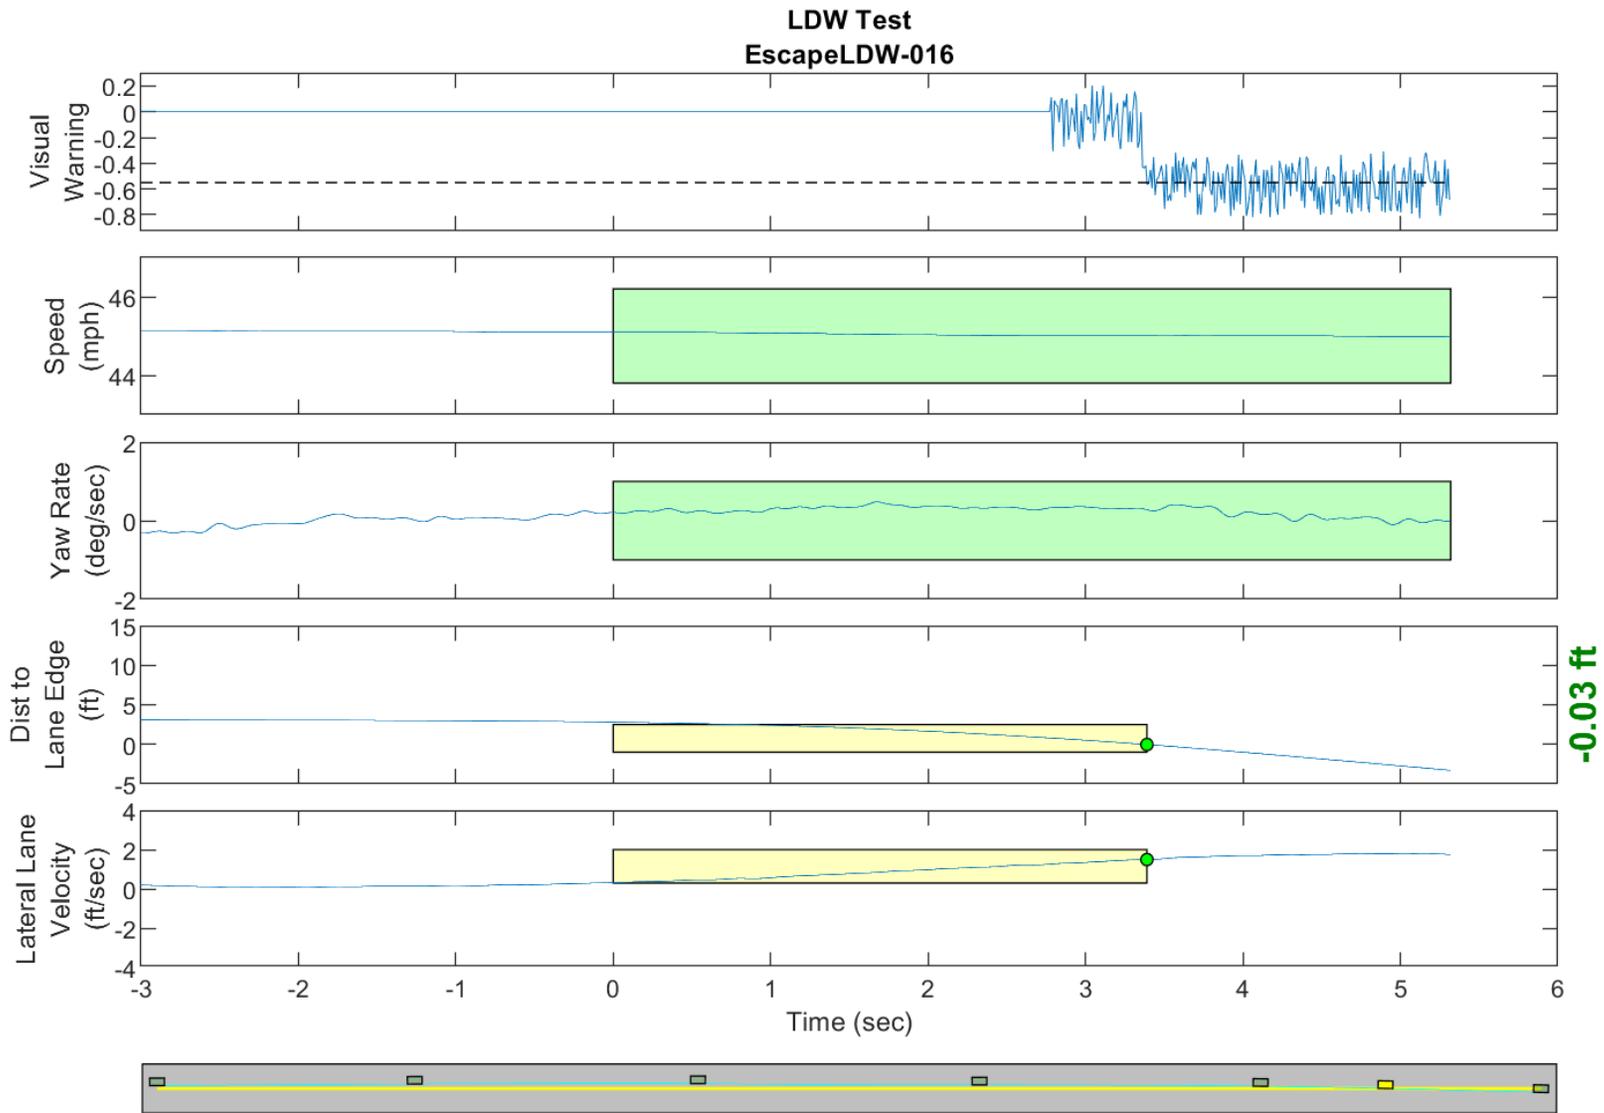


GPS Fix Type: RTK Fixed

Figure D34. Time History for Run 16, Solid Line, Right Departure, Visual Warning

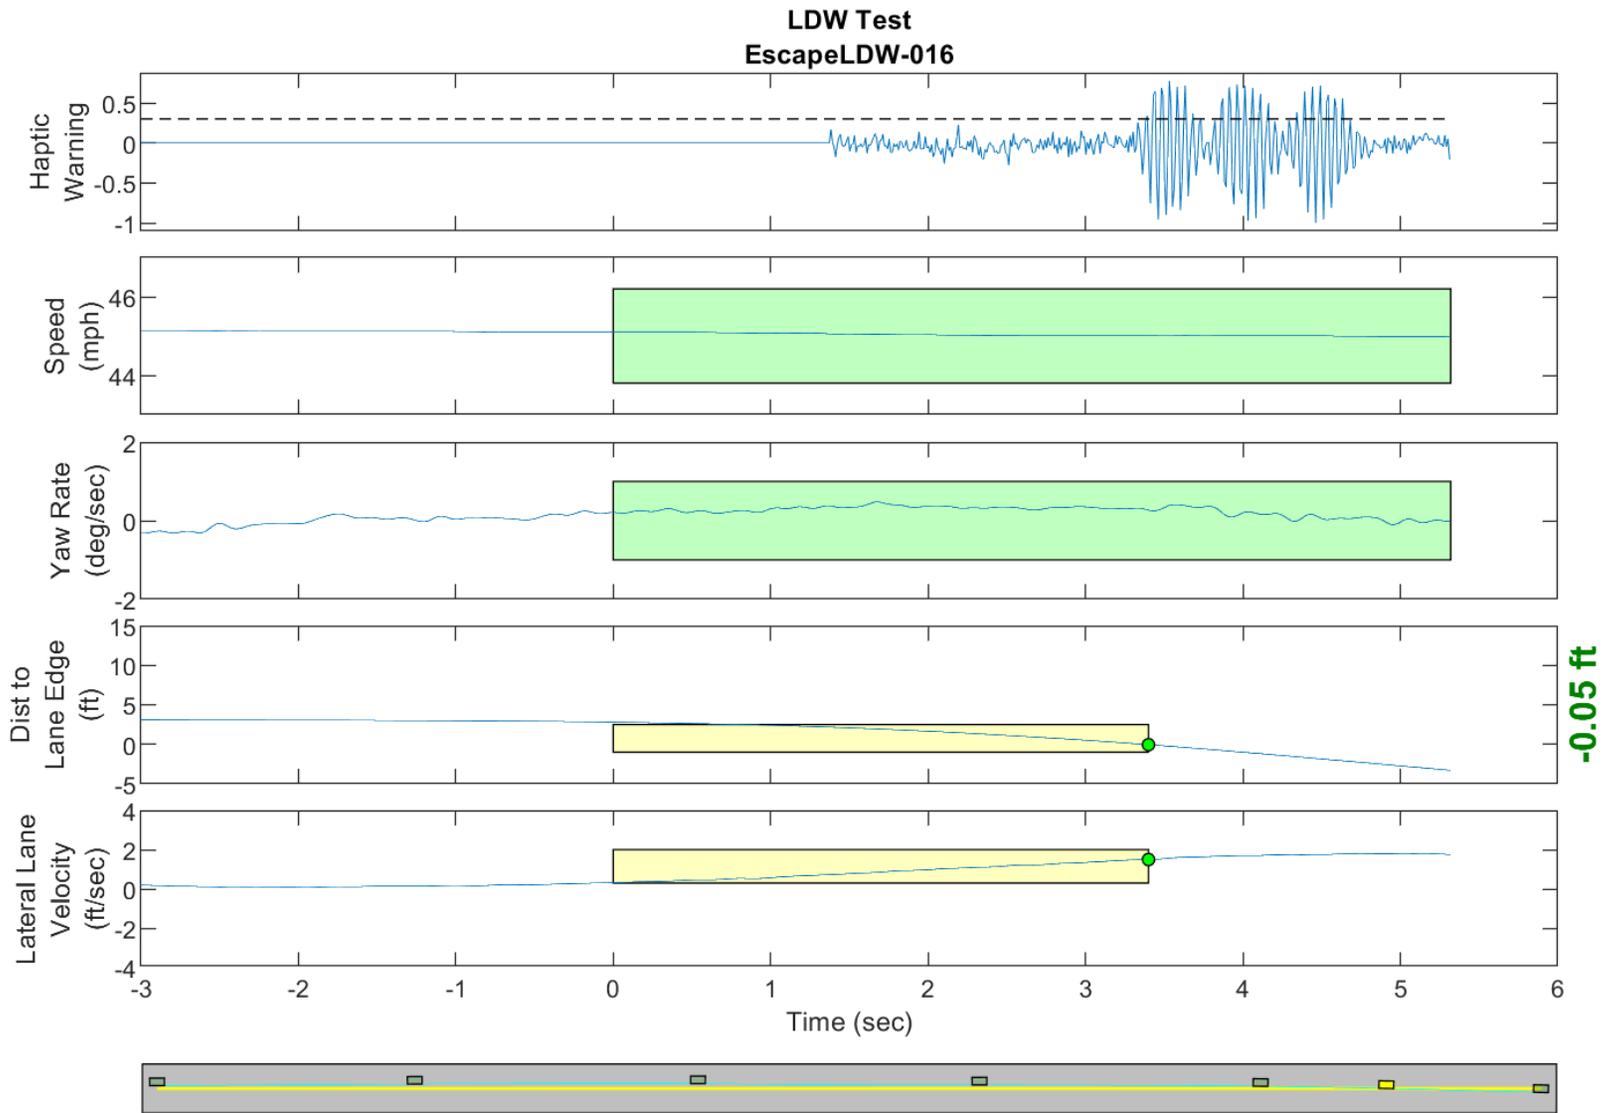


GPS Fix Type: RTK Fixed

Figure D35. Time History for Run 16, Solid Line, Right Departure, Haptic Warning

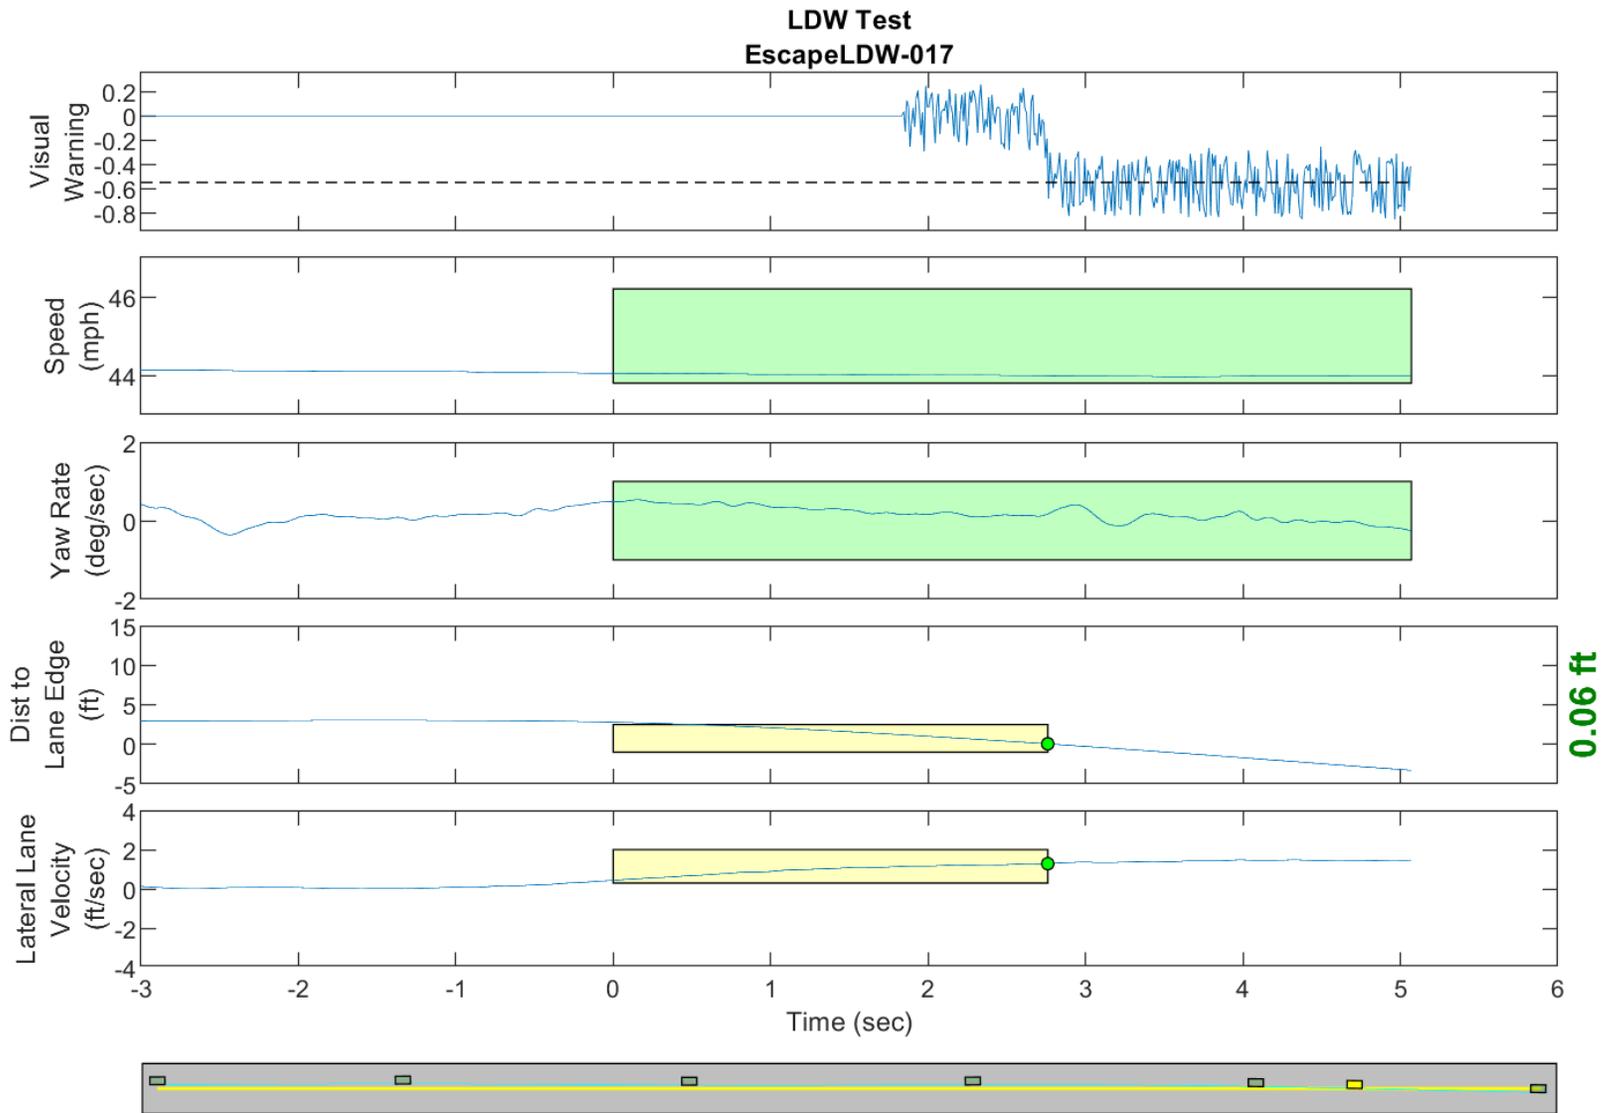


GPS Fix Type: RTK Fixed

Figure D36. Time History for Run 17, Solid Line, Right Departure, Visual Warning

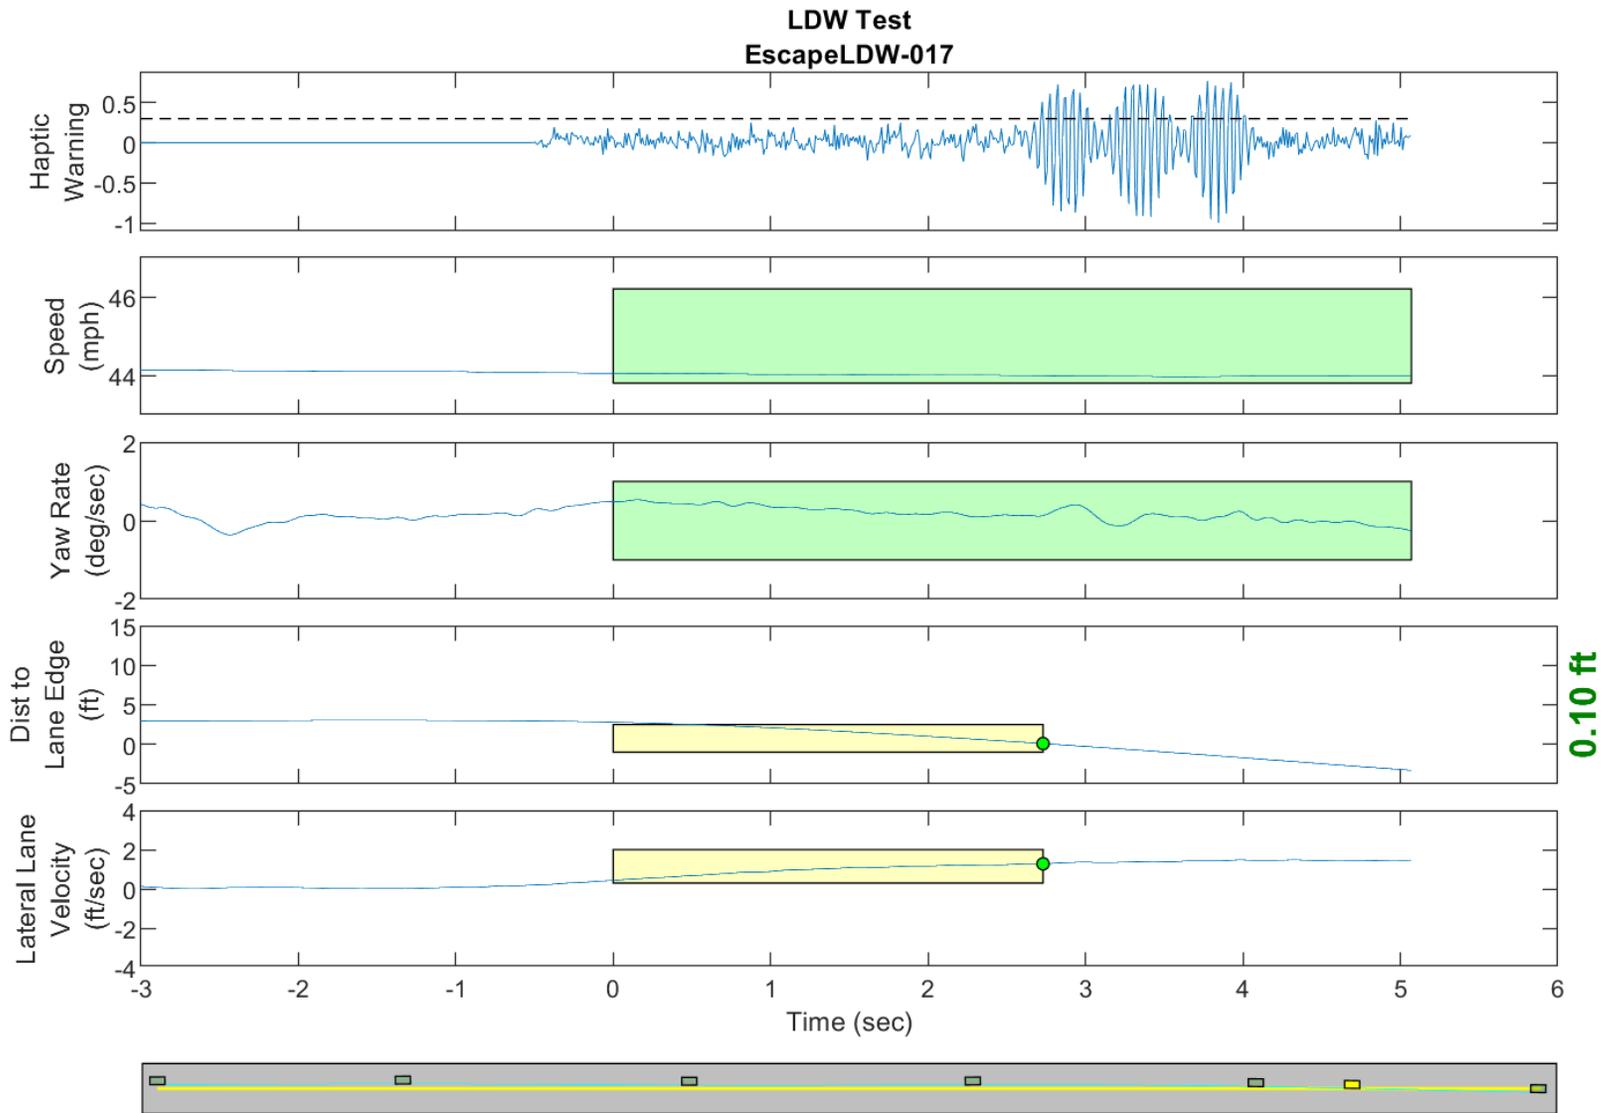


GPS Fix Type: RTK Fixed

Figure D37. Time History for Run 17, Solid Line, Right Departure, Haptic Warning

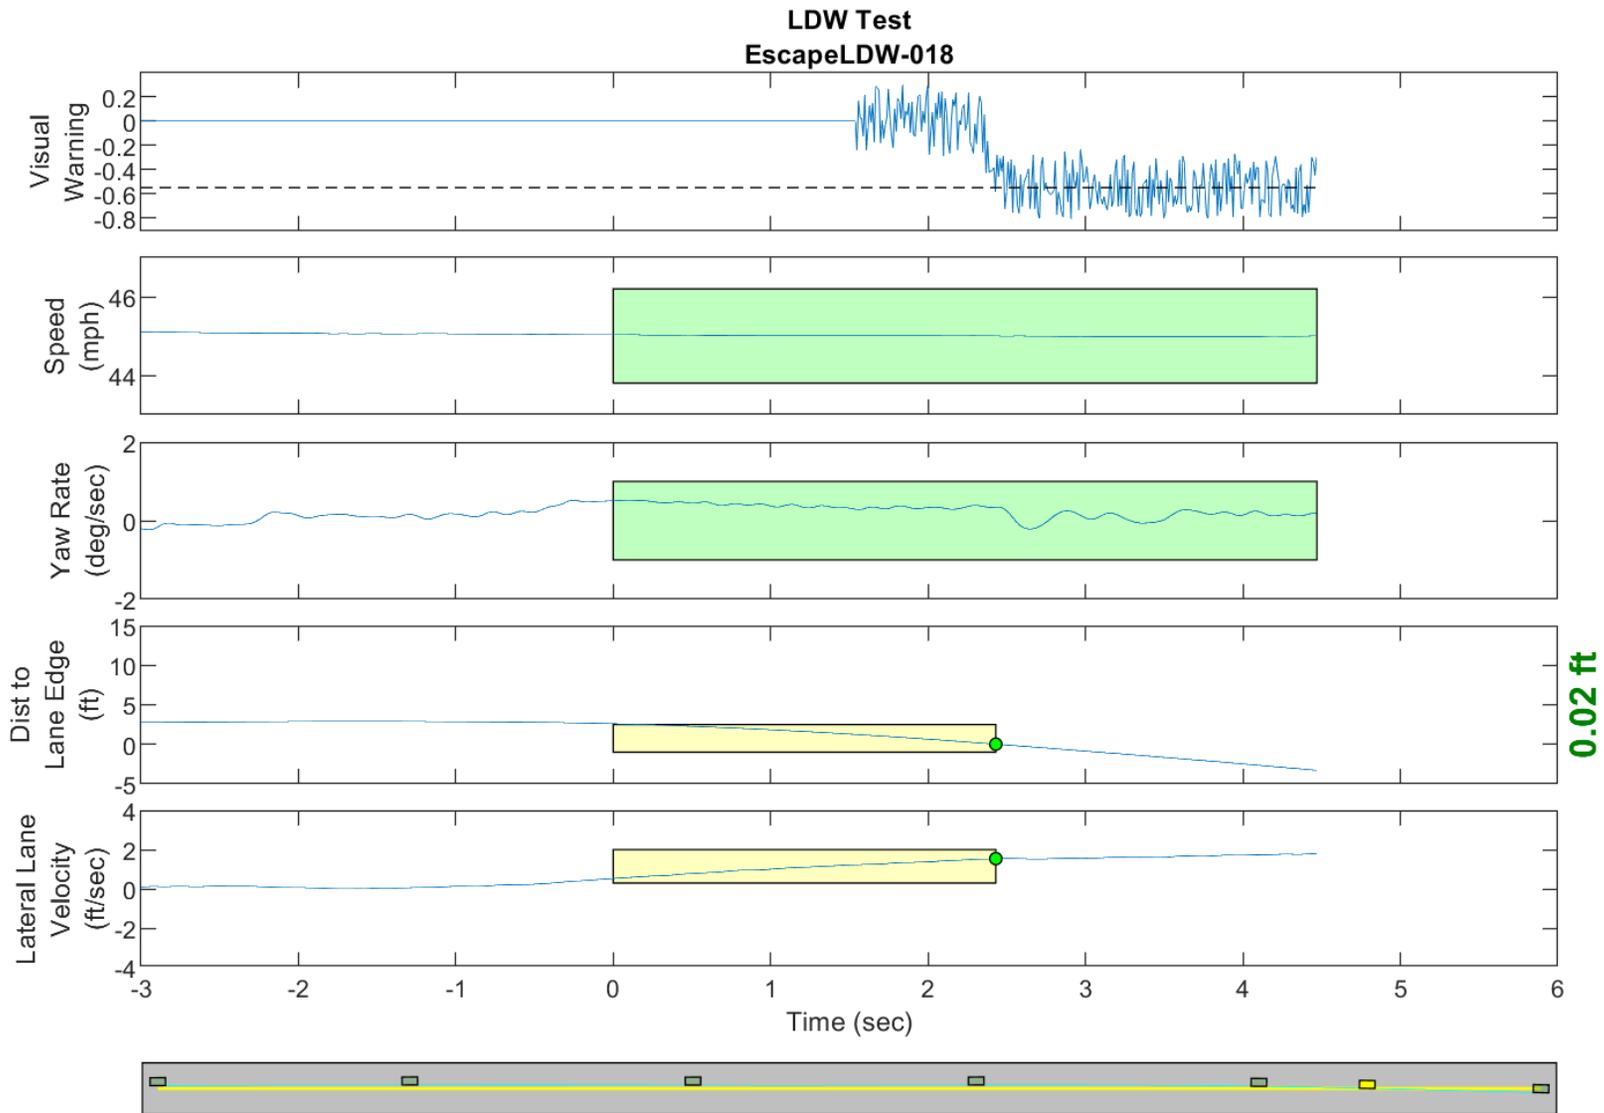


GPS Fix Type: RTK Fixed

Figure D38. Time History for Run 18, Solid Line, Right Departure, Visual Warning

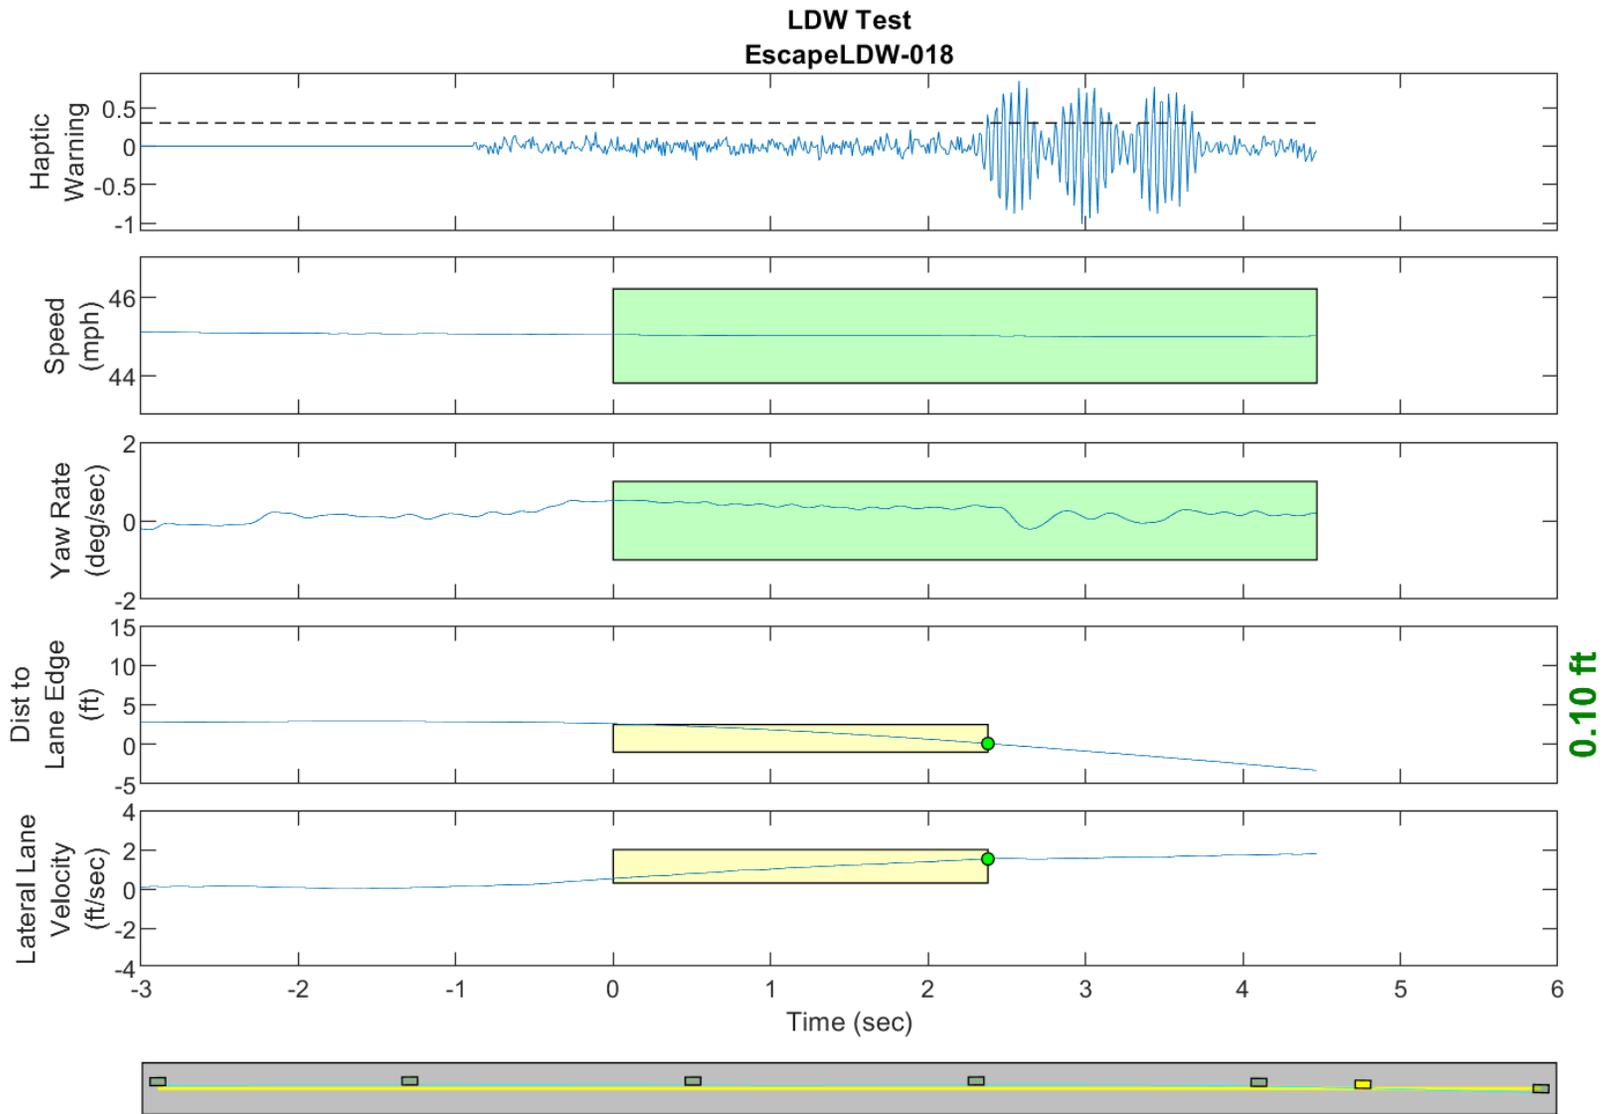


GPS Fix Type: RTK Fixed

Figure D39. Time History for Run 18, Solid Line, Right Departure, Haptic Warning

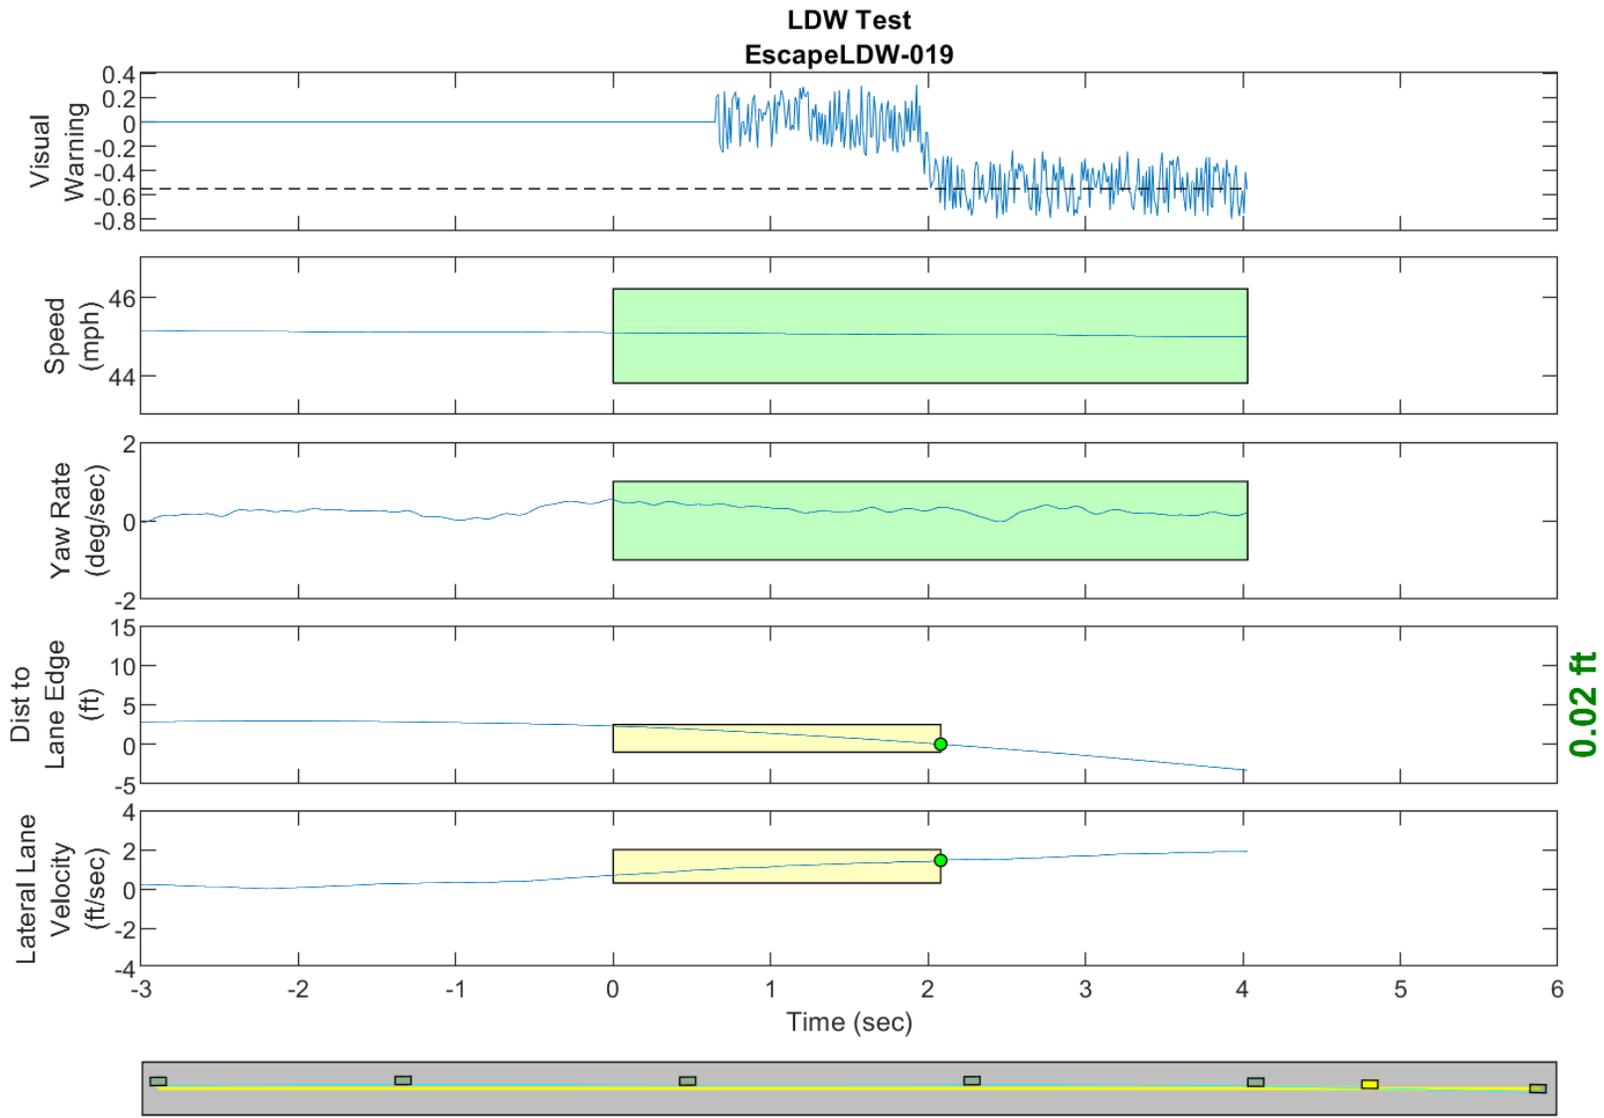


GPS Fix Type: RTK Fixed

Figure D40. Time History for Run 19, Solid Line, Right Departure, Visual Warning

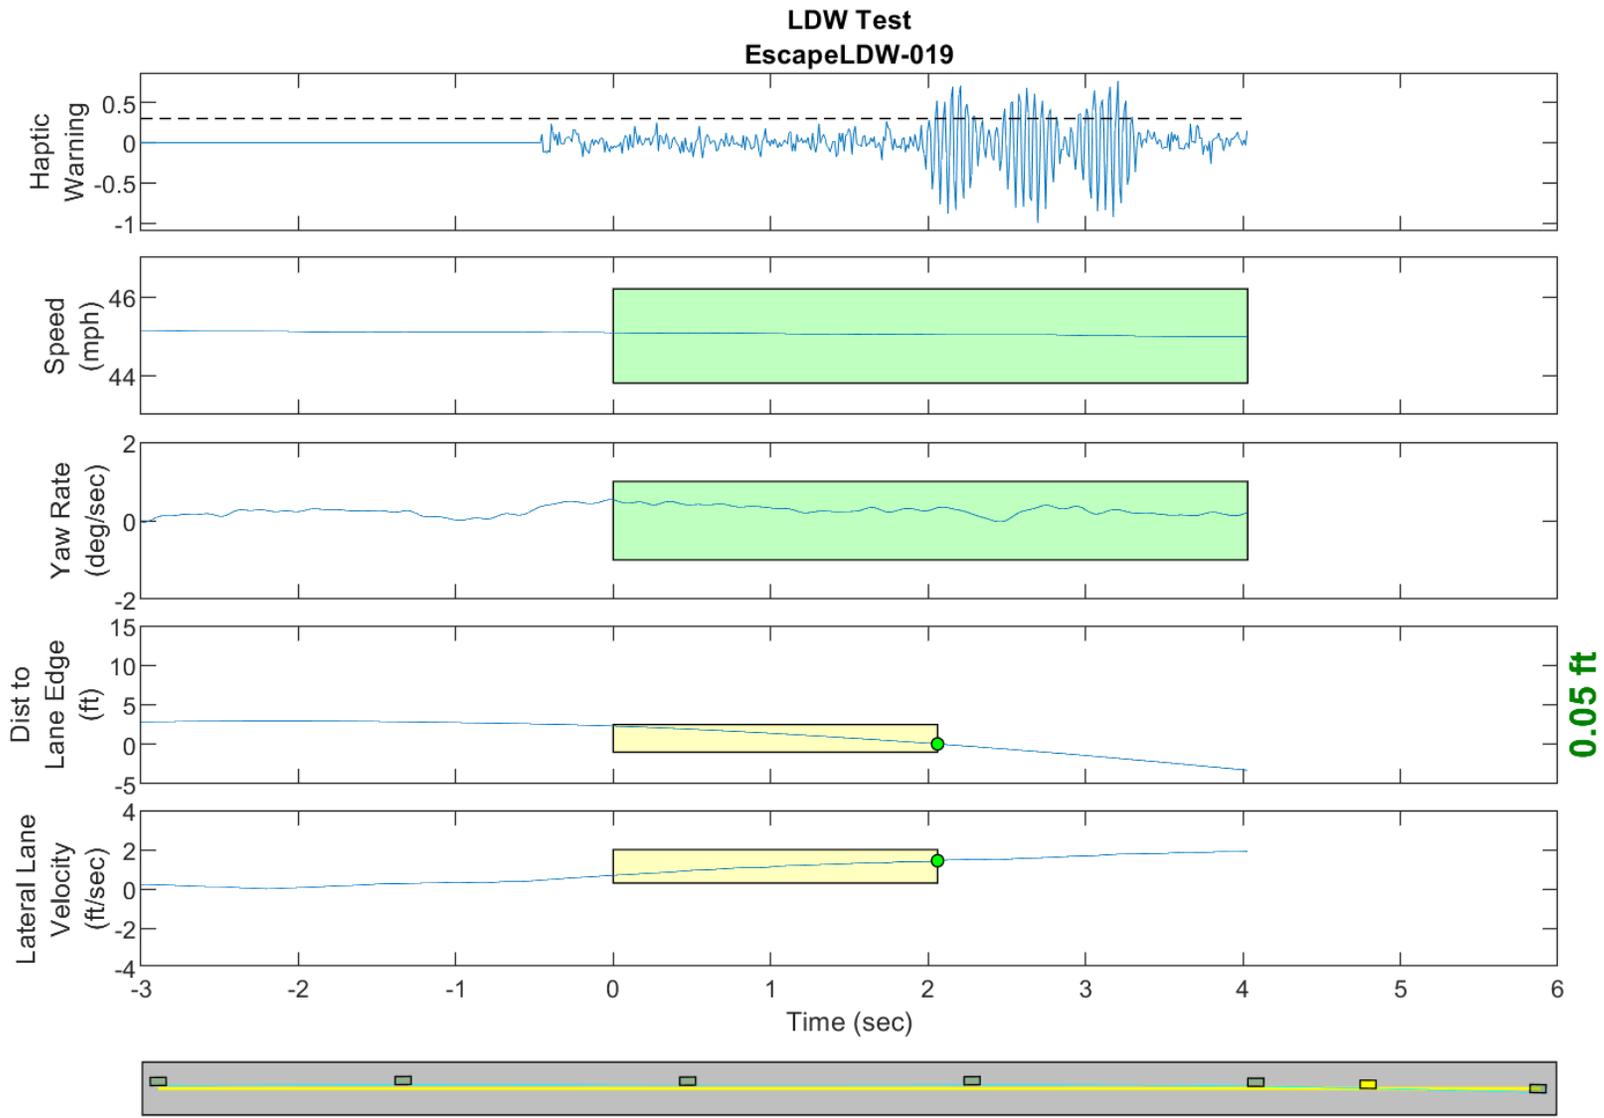


GPS Fix Type: RTK Fixed

Figure D41. Time History for Run 19, Solid Line, Right Departure, Haptic Warning

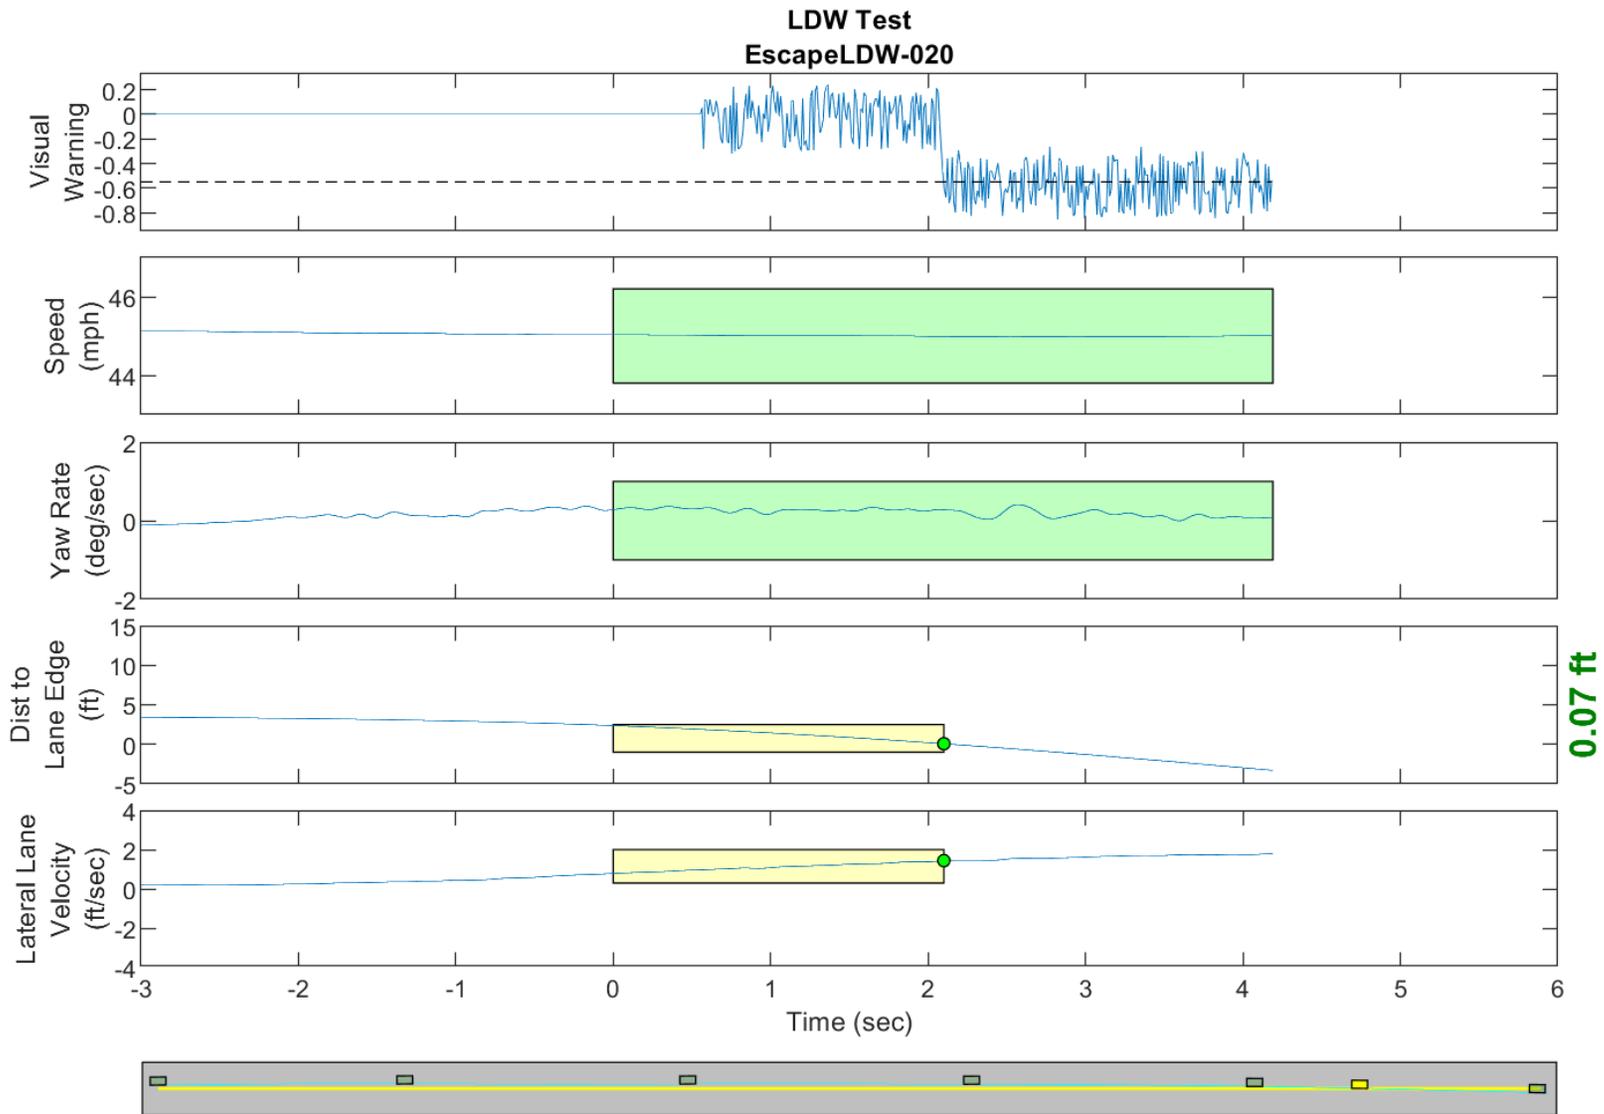


GPS Fix Type: RTK Fixed

Figure D42. Time History for Run 20, Solid Line, Right Departure, Visual Warning

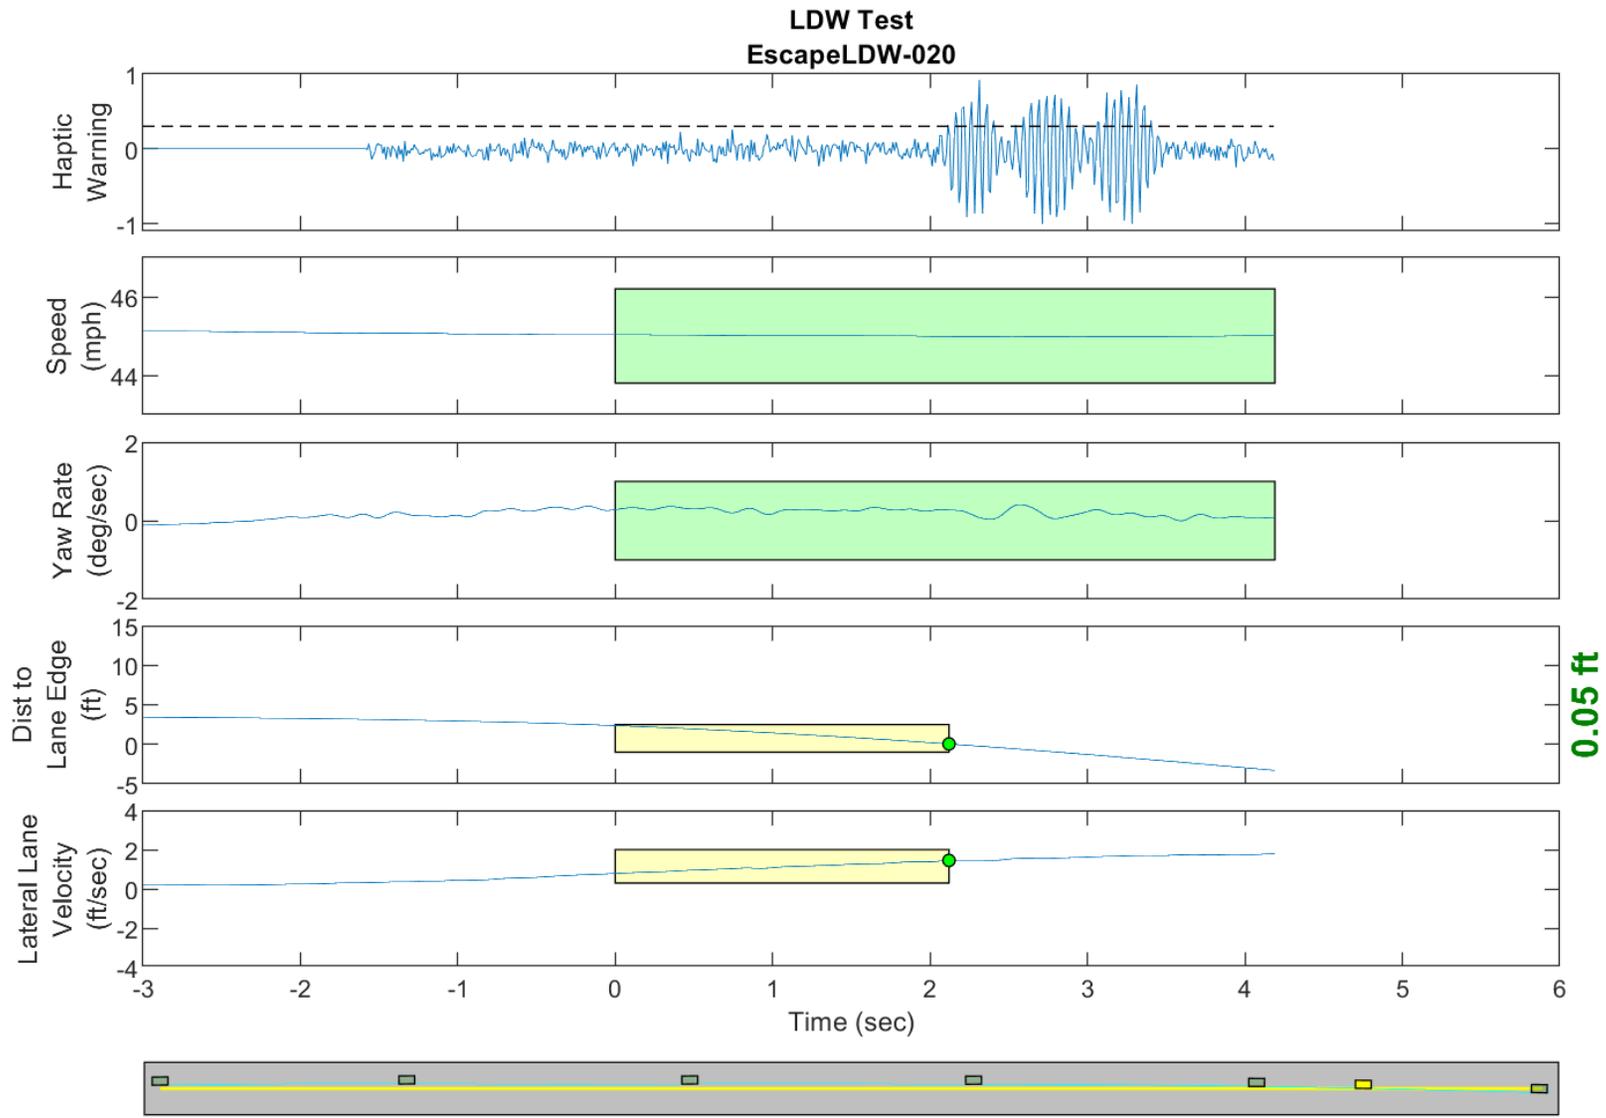


GPS Fix Type: RTK Fixed

Figure D43. Time History for Run 20, Solid Line, Right Departure, Haptic Warning

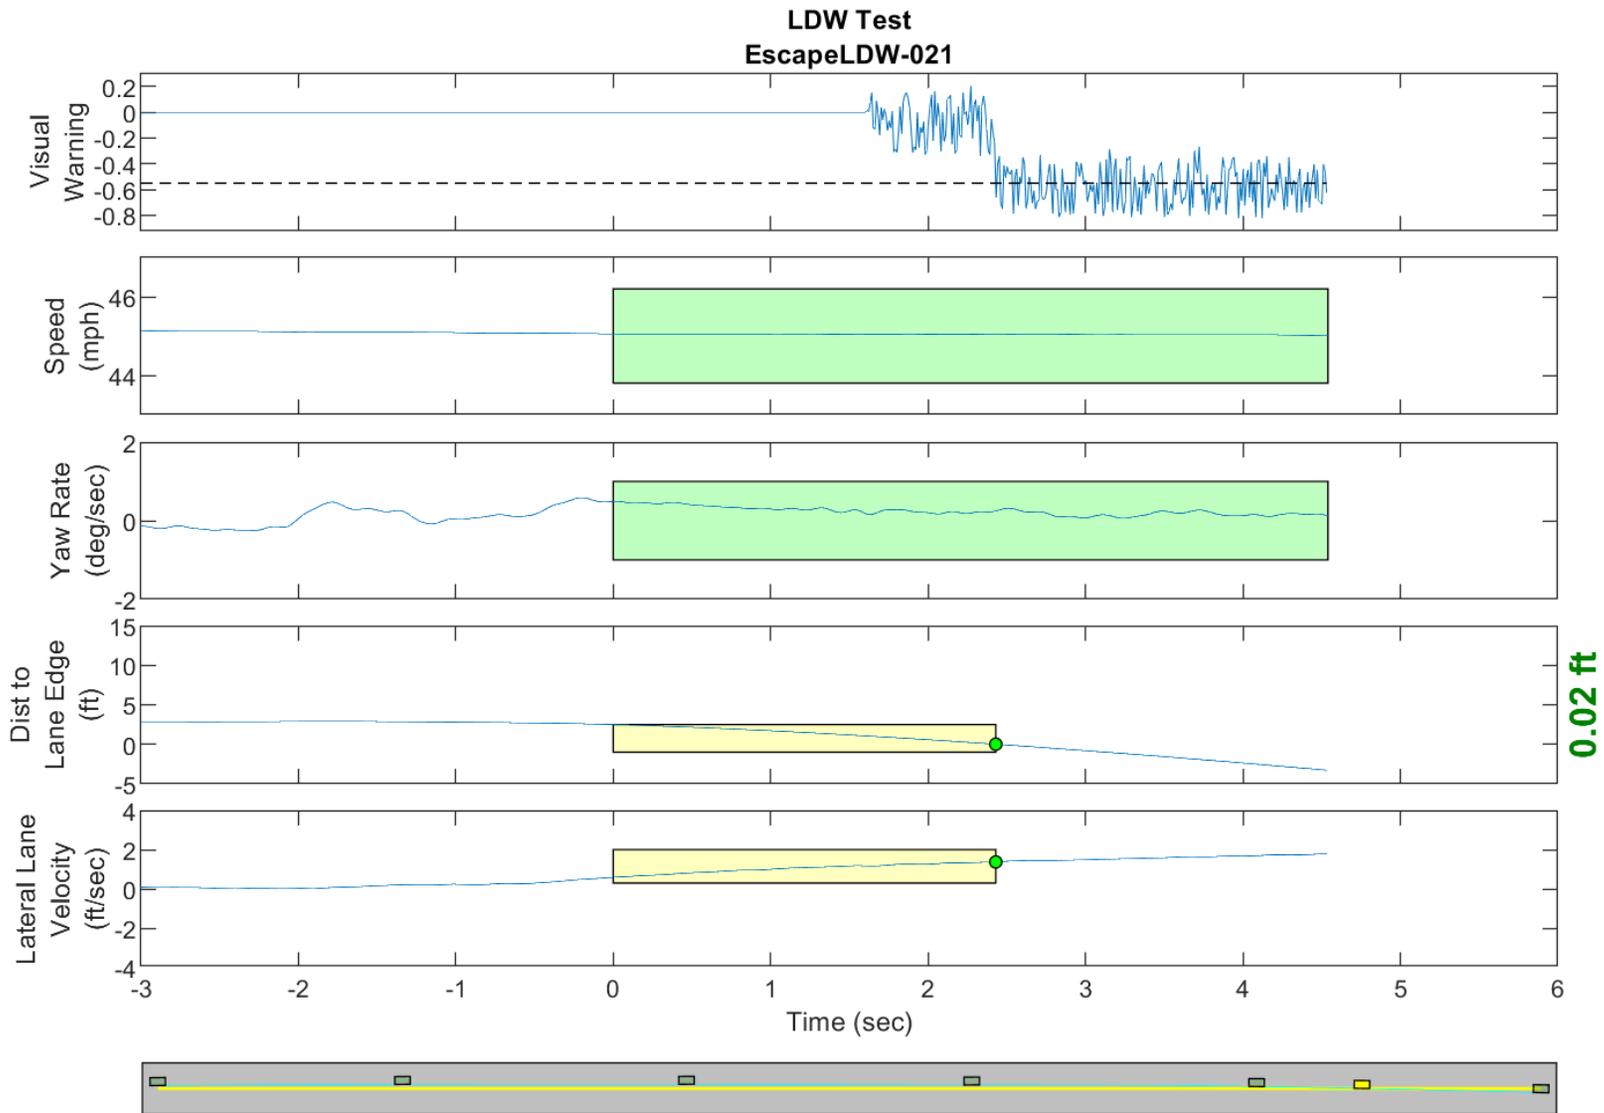


GPS Fix Type: RTK Fixed

Figure D44. Time History for Run 21, Solid Line, Right Departure, Visual Warning

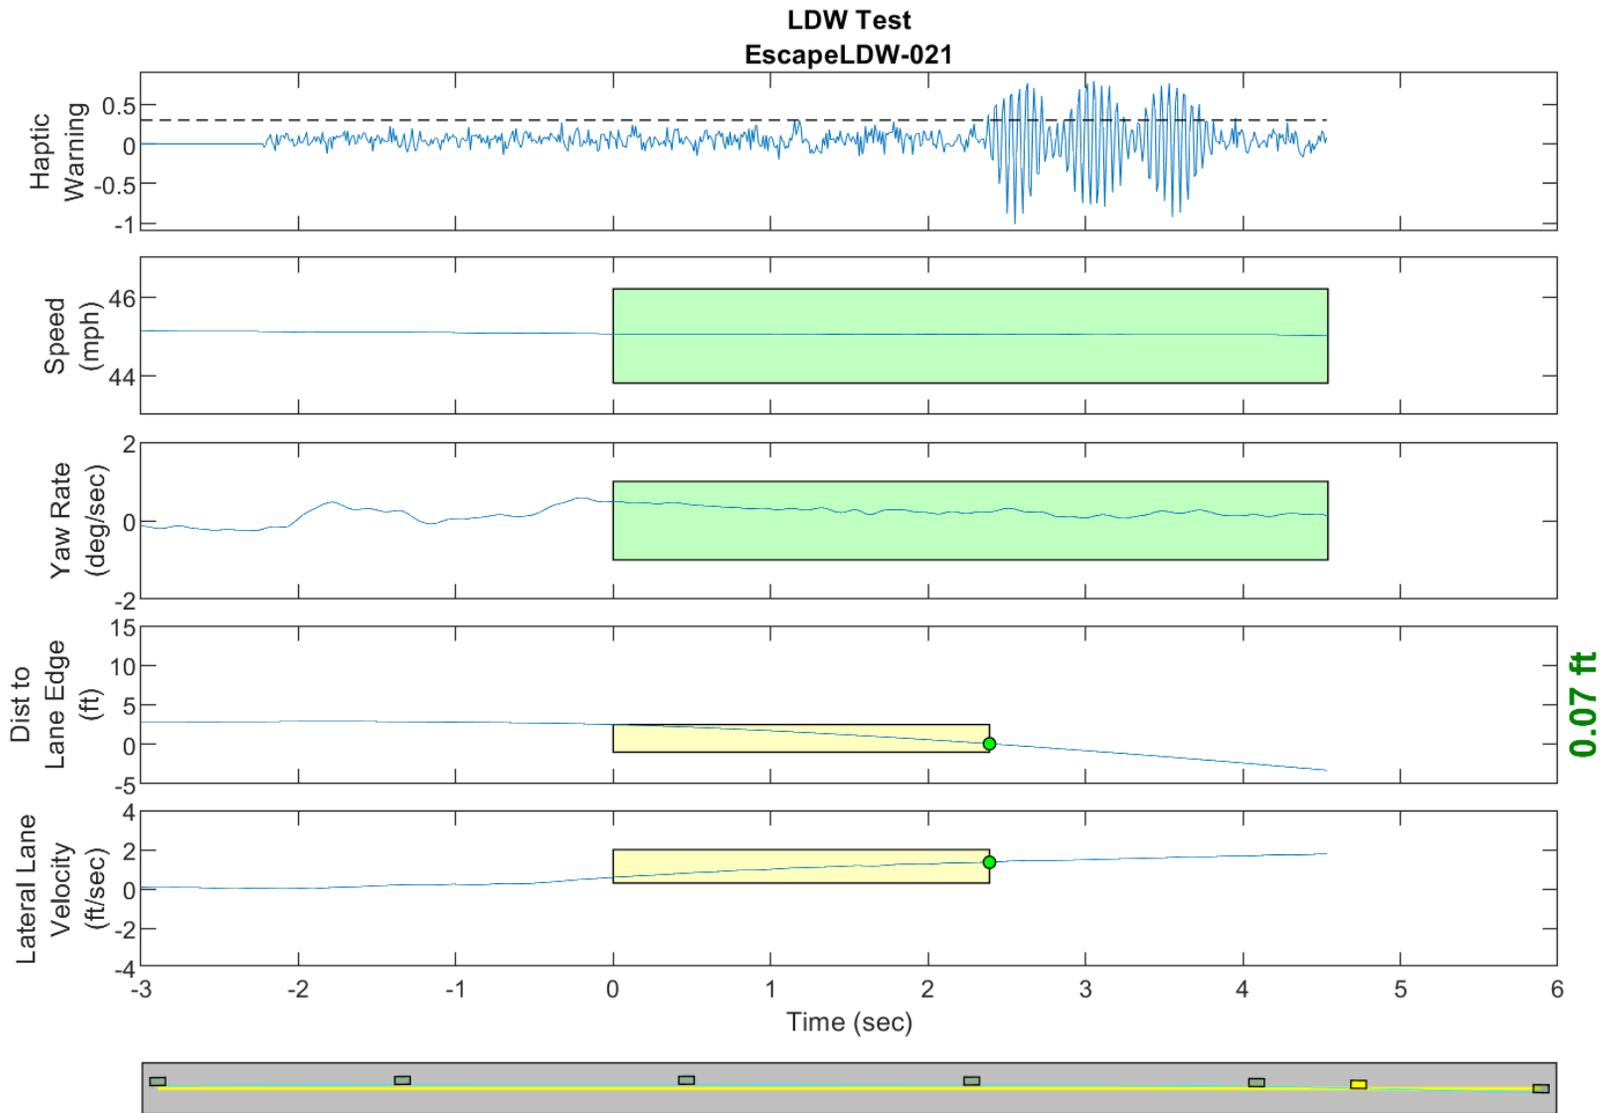


GPS Fix Type: RTK Fixed

Figure D45. Time History for Run 21, Solid Line, Right Departure, Haptic Warning

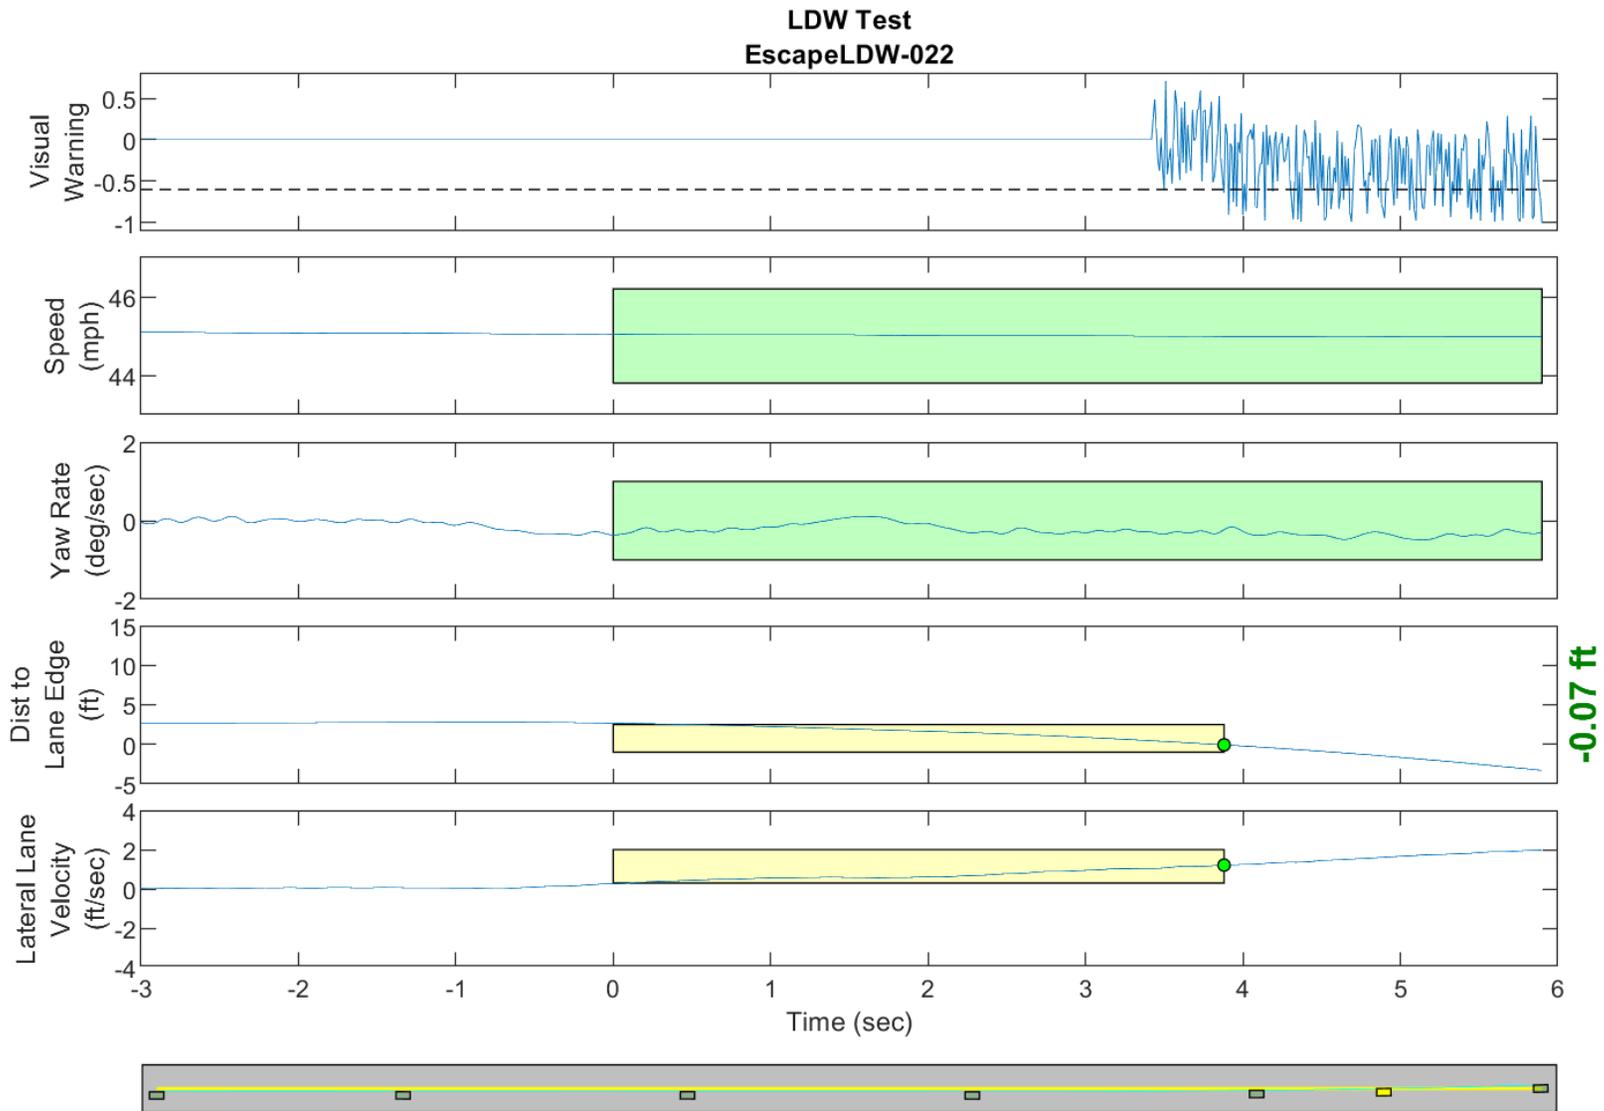


GPS Fix Type: RTK Fixed

Figure D46. Time History for Run 22, Solid Line, Left Departure, Visual Warning

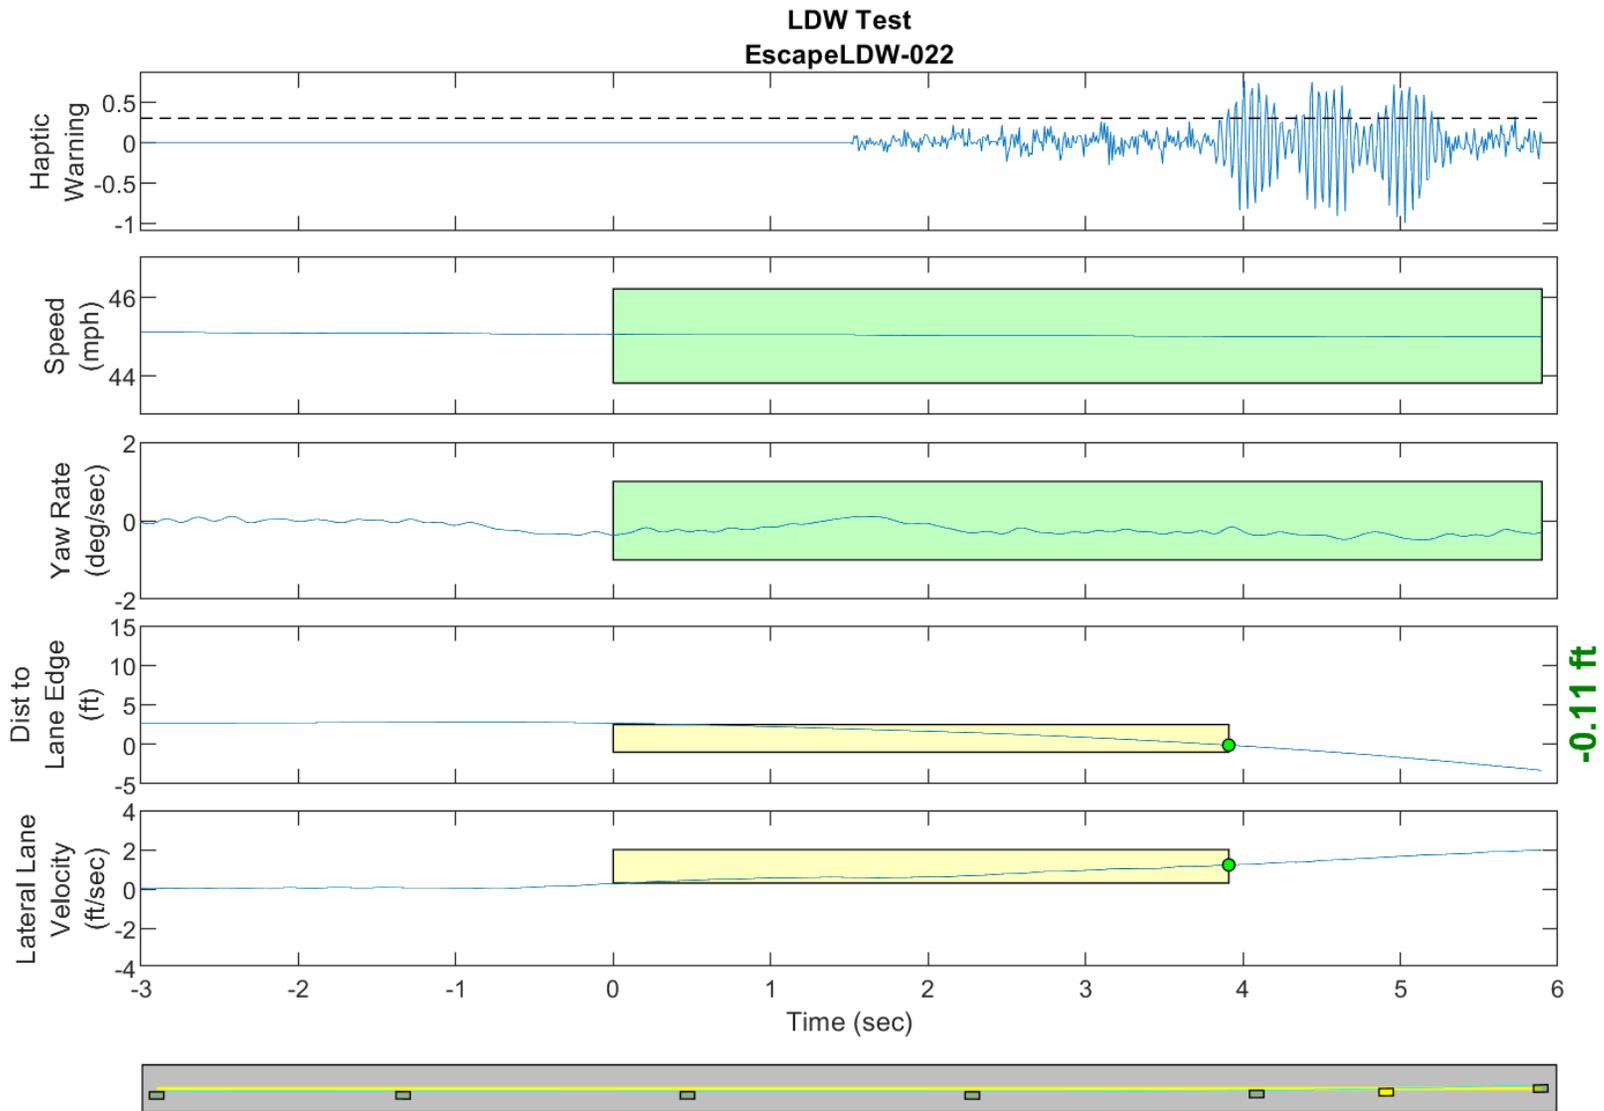


GPS Fix Type: RTK Fixed

Figure D47. Time History for Run 22, Solid Line, Left Departure, Haptic Warning

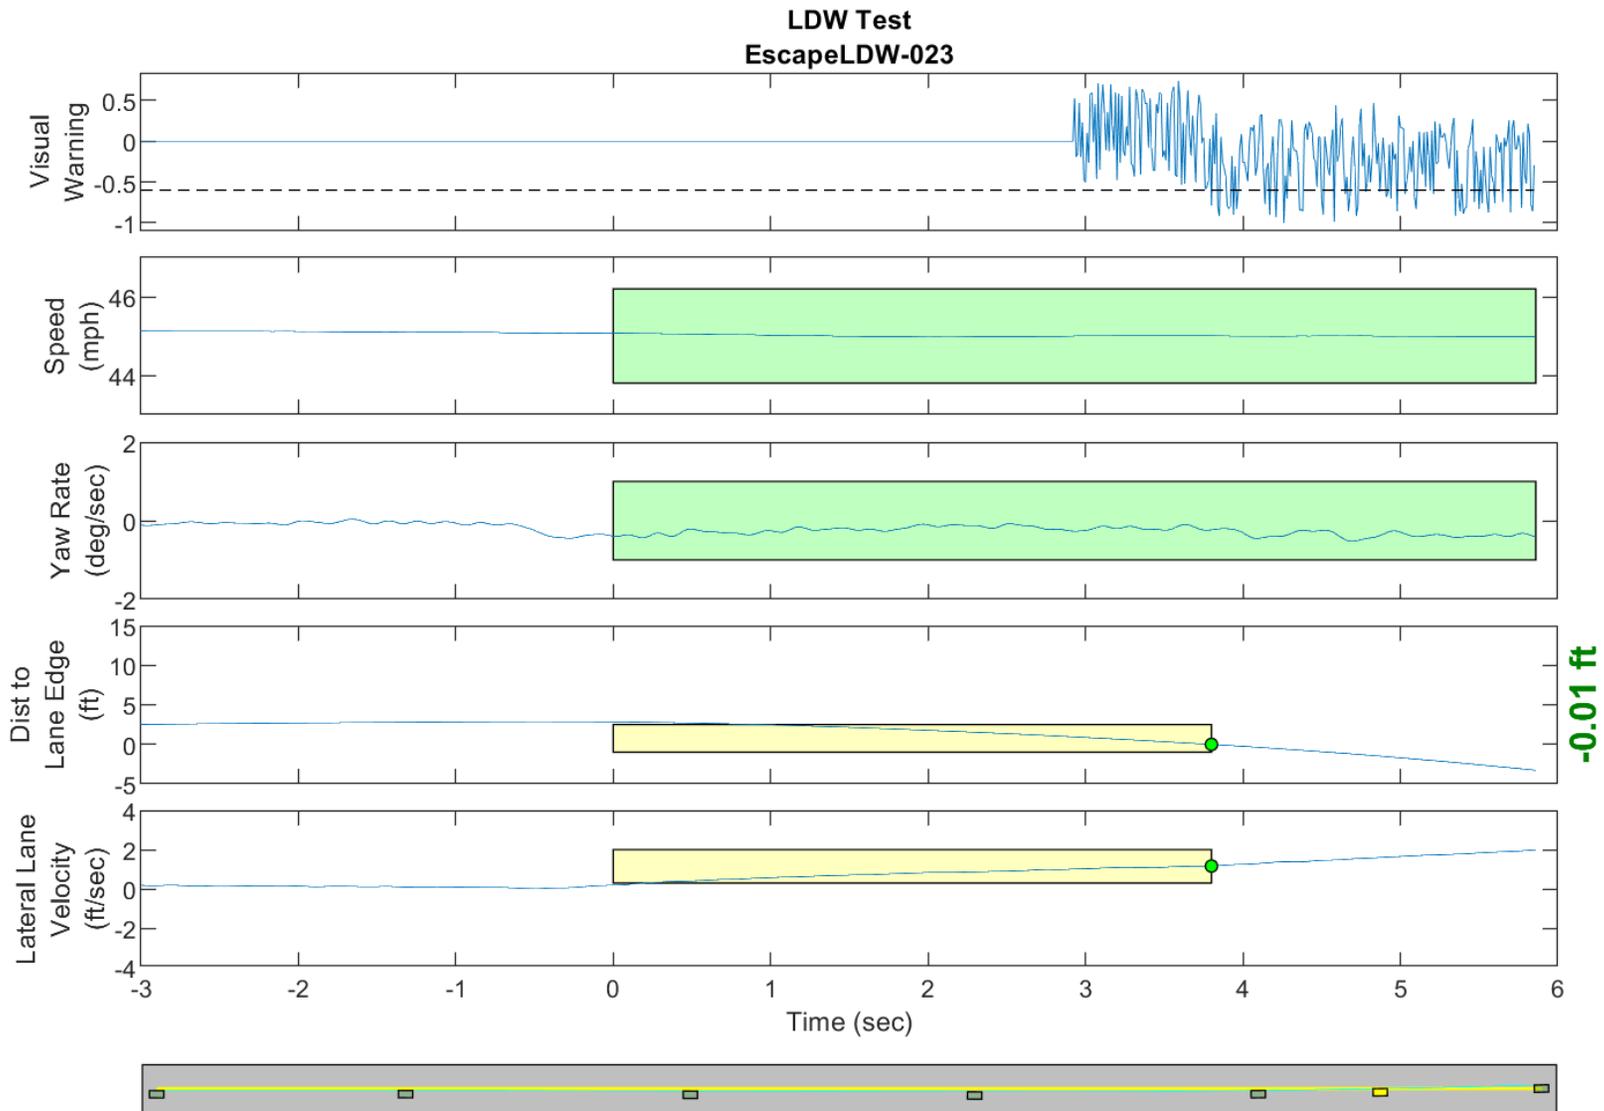


GPS Fix Type: RTK Fixed

Figure D48. Time History for Run 23, Solid Line, Left Departure, Visual Warning

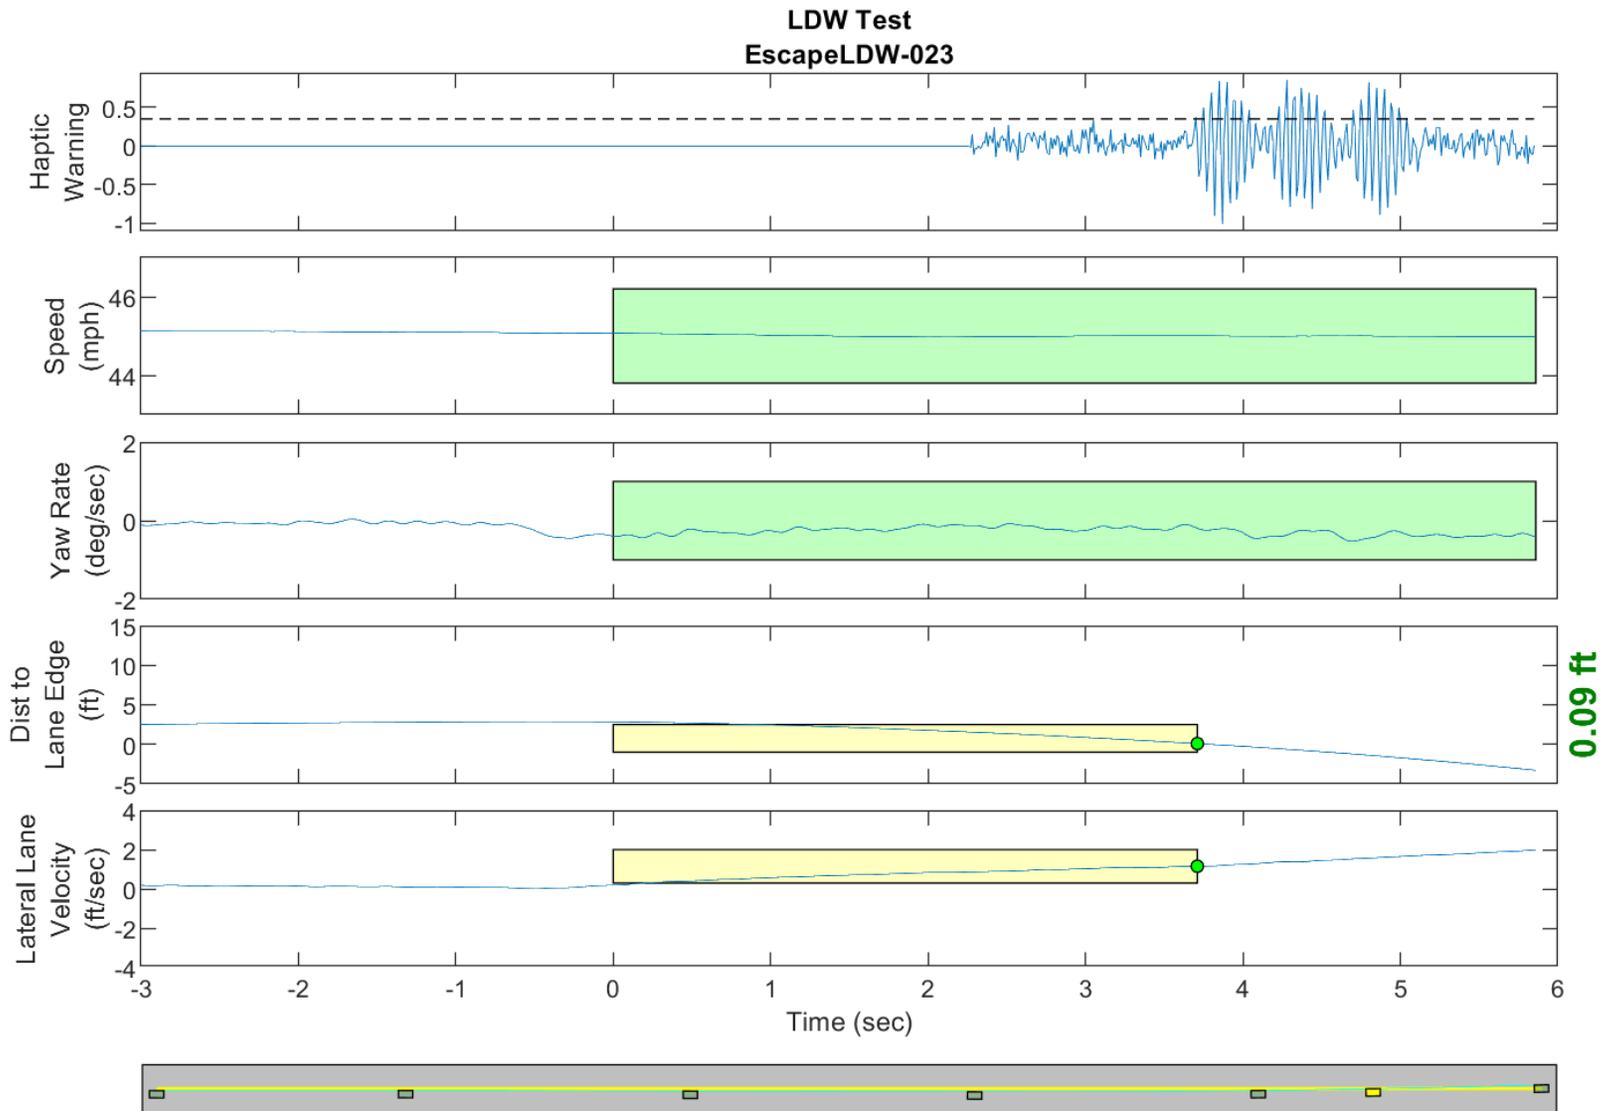


GPS Fix Type: RTK Fixed

Figure D49. Time History for Run 23, Solid Line, Left Departure, Haptic Warning

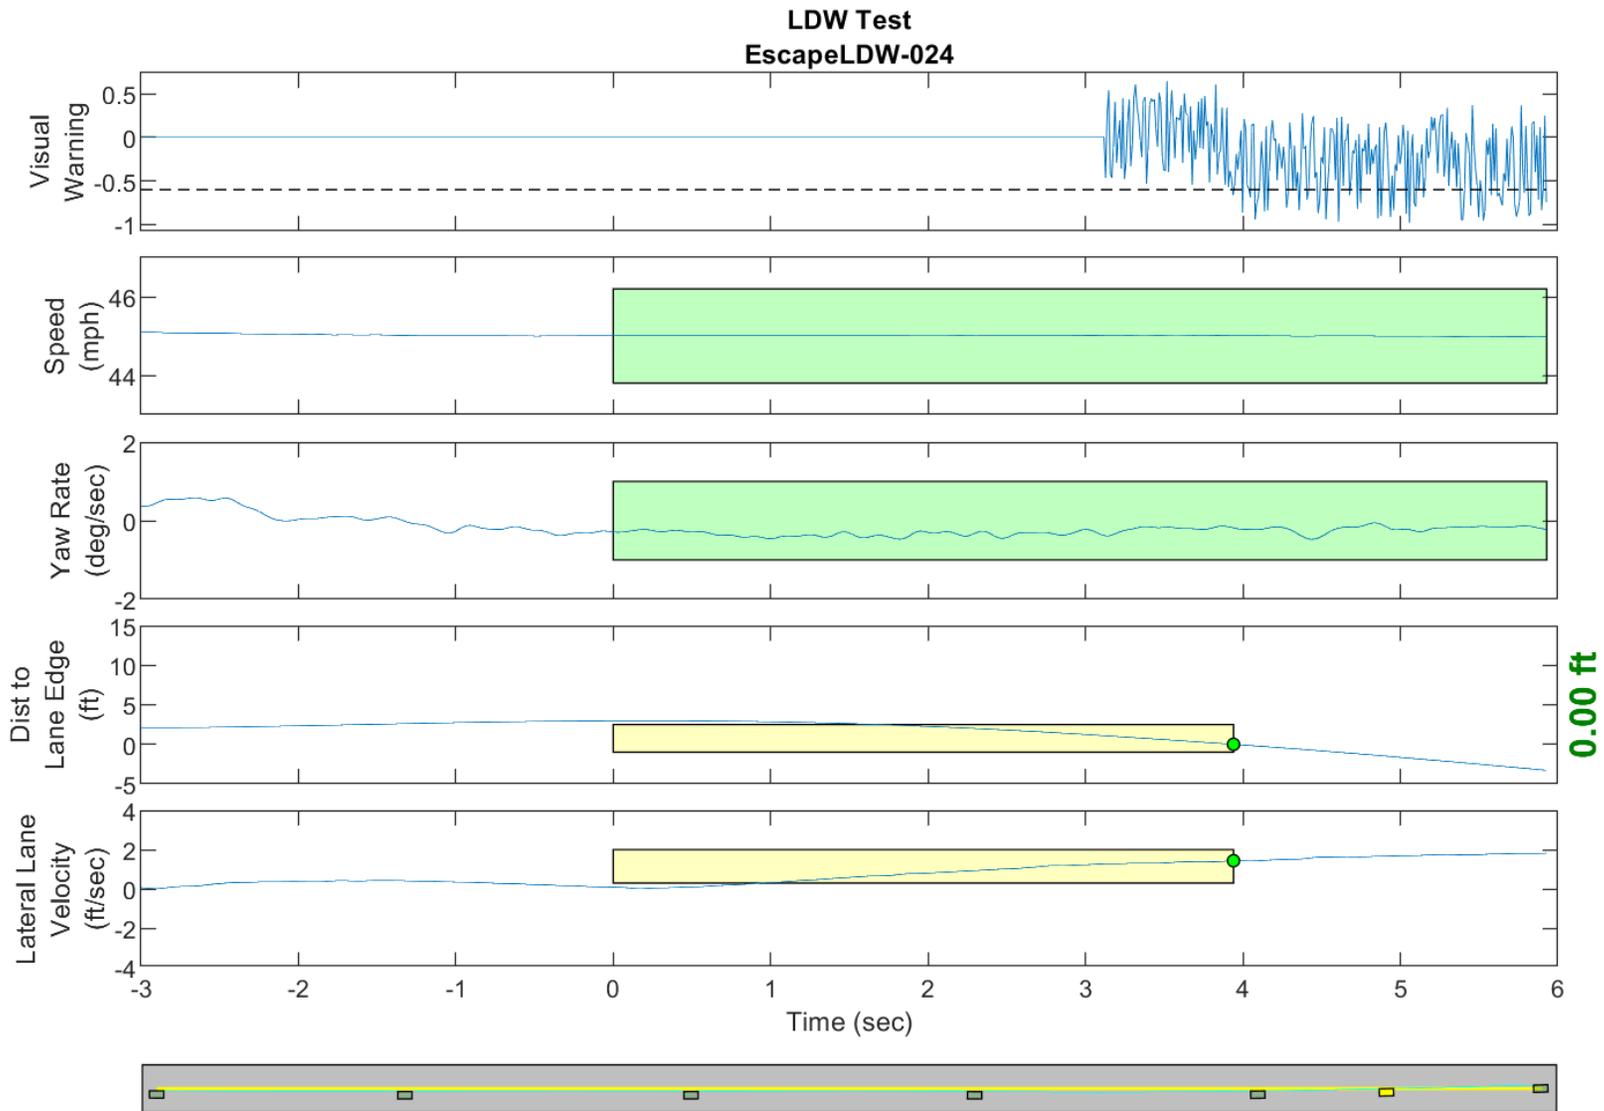


GPS Fix Type: RTK Fixed

Figure D50. Time History for Run 24, Solid Line, Left Departure, Visual Warning

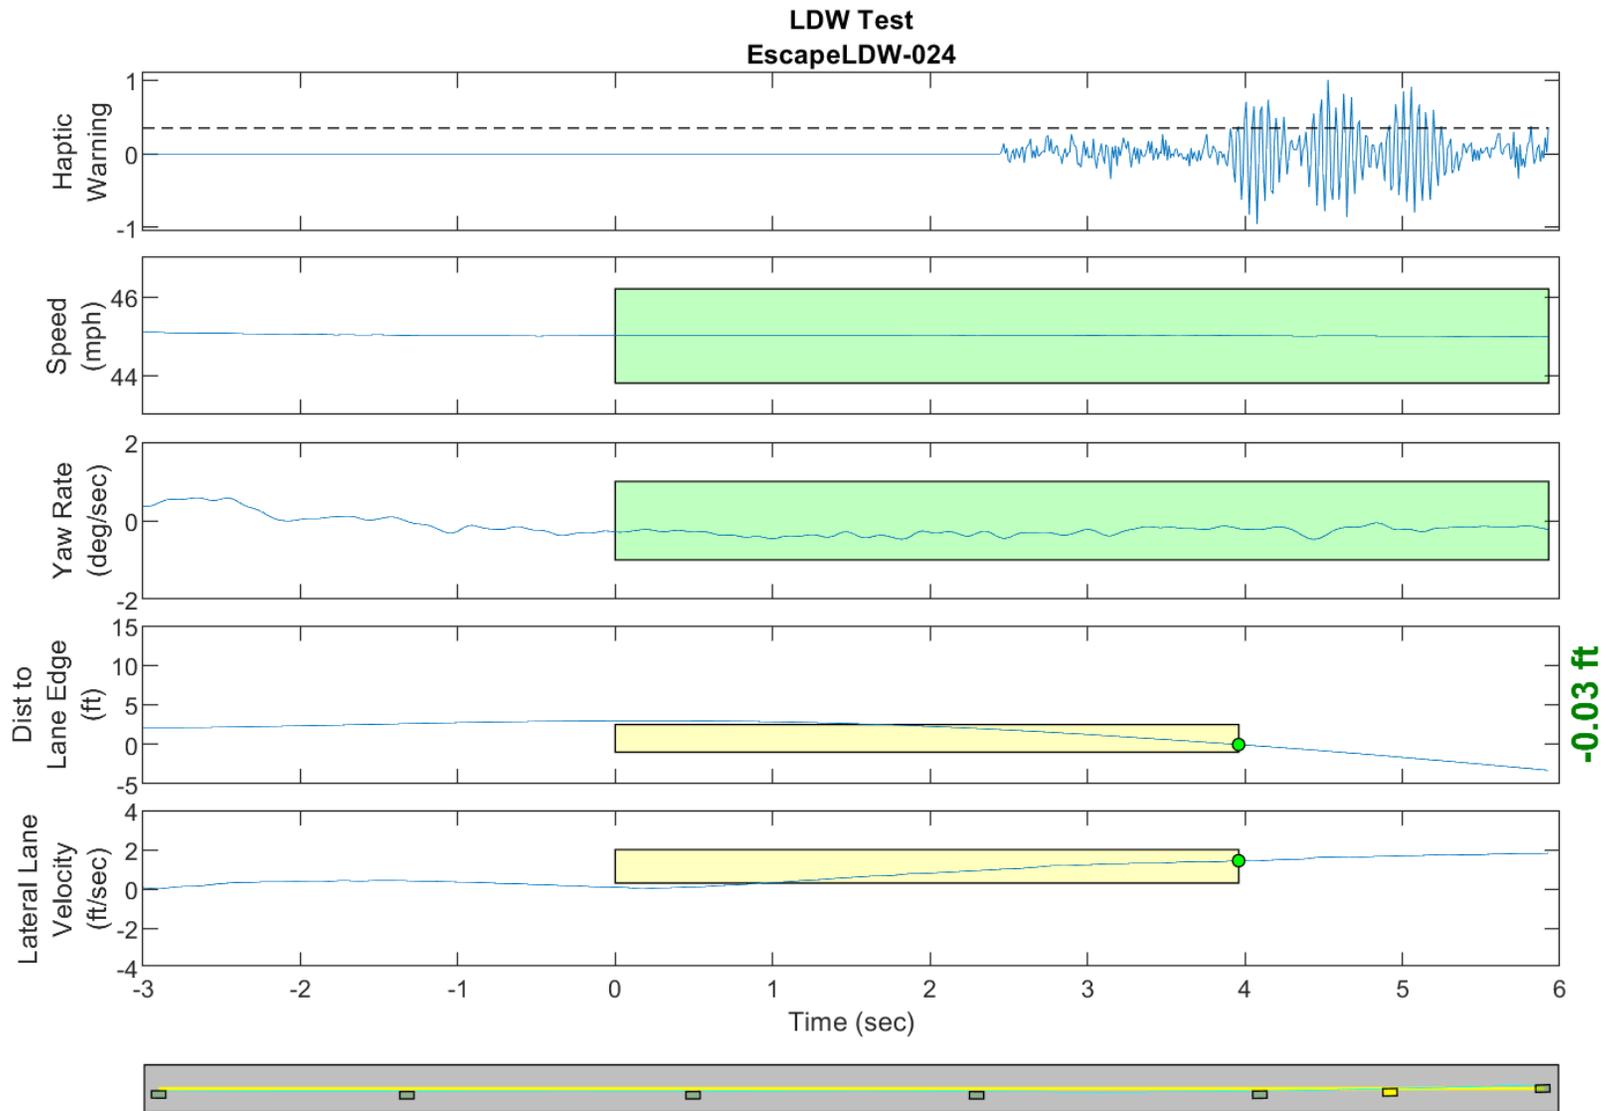


GPS Fix Type: RTK Fixed

Figure D51. Time History for Run 24, Solid Line, Left Departure, Haptic Warning

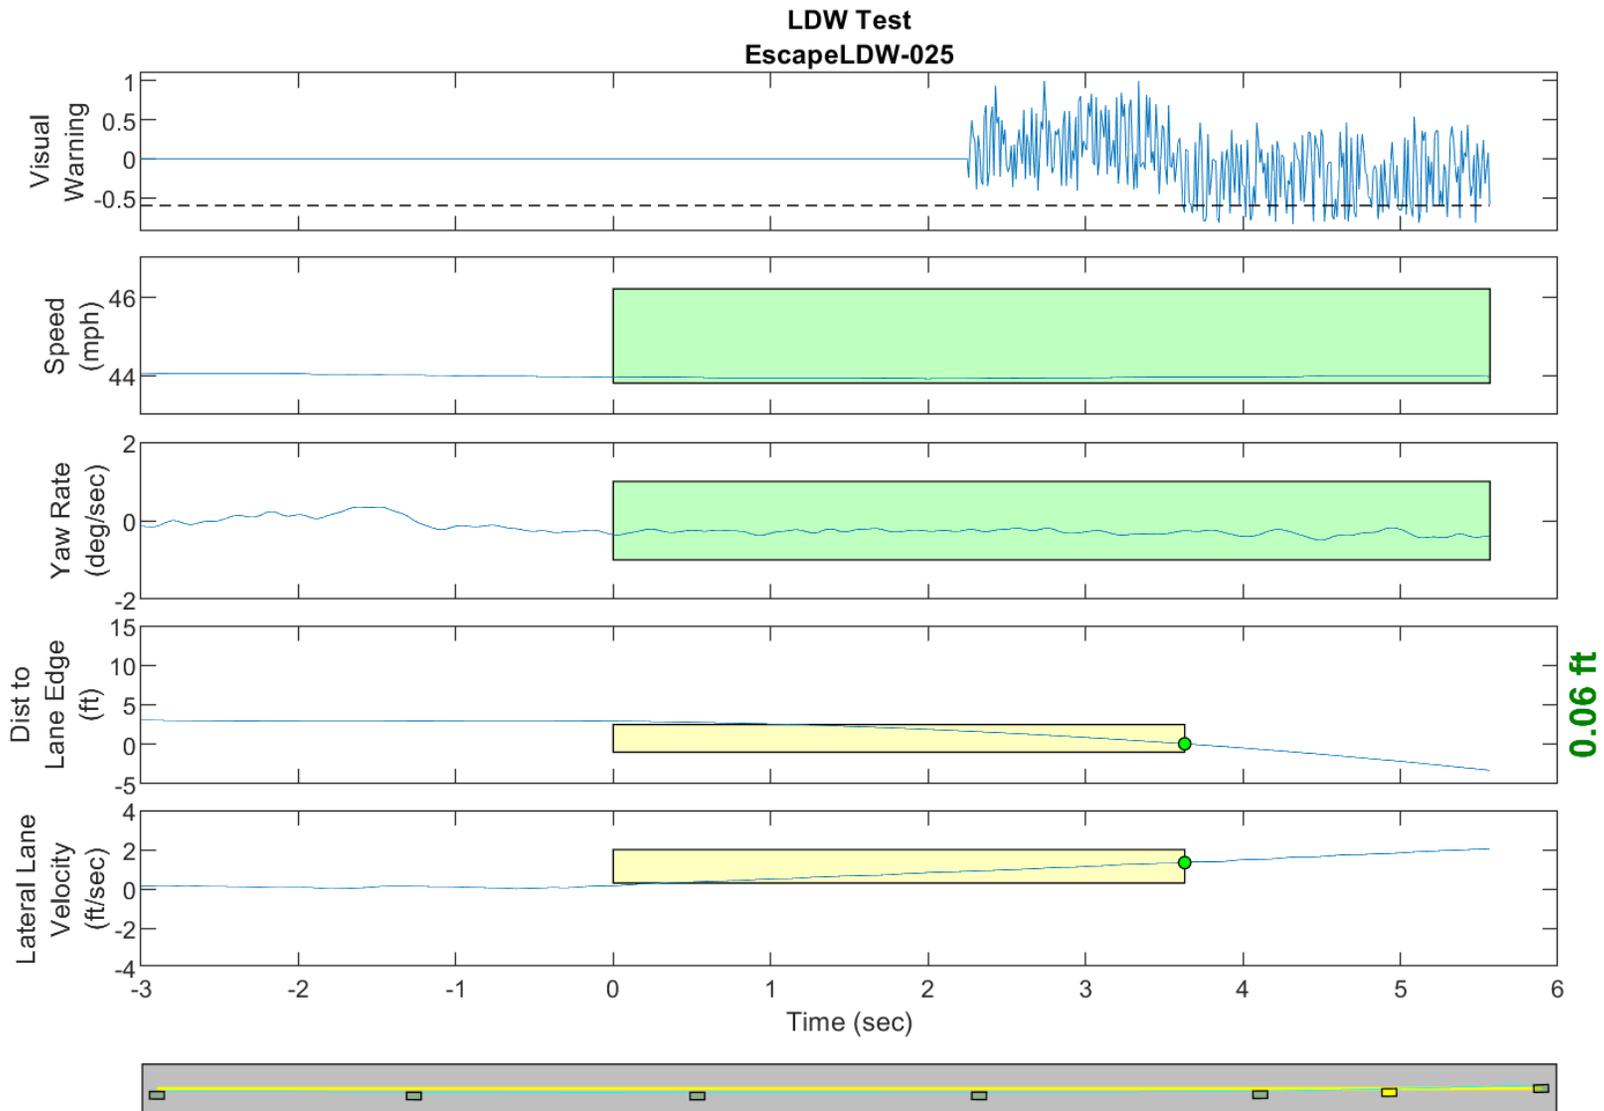


GPS Fix Type: RTK Fixed

Figure D52. Time History for Run 25, Solid Line, Left Departure, Visual Warning

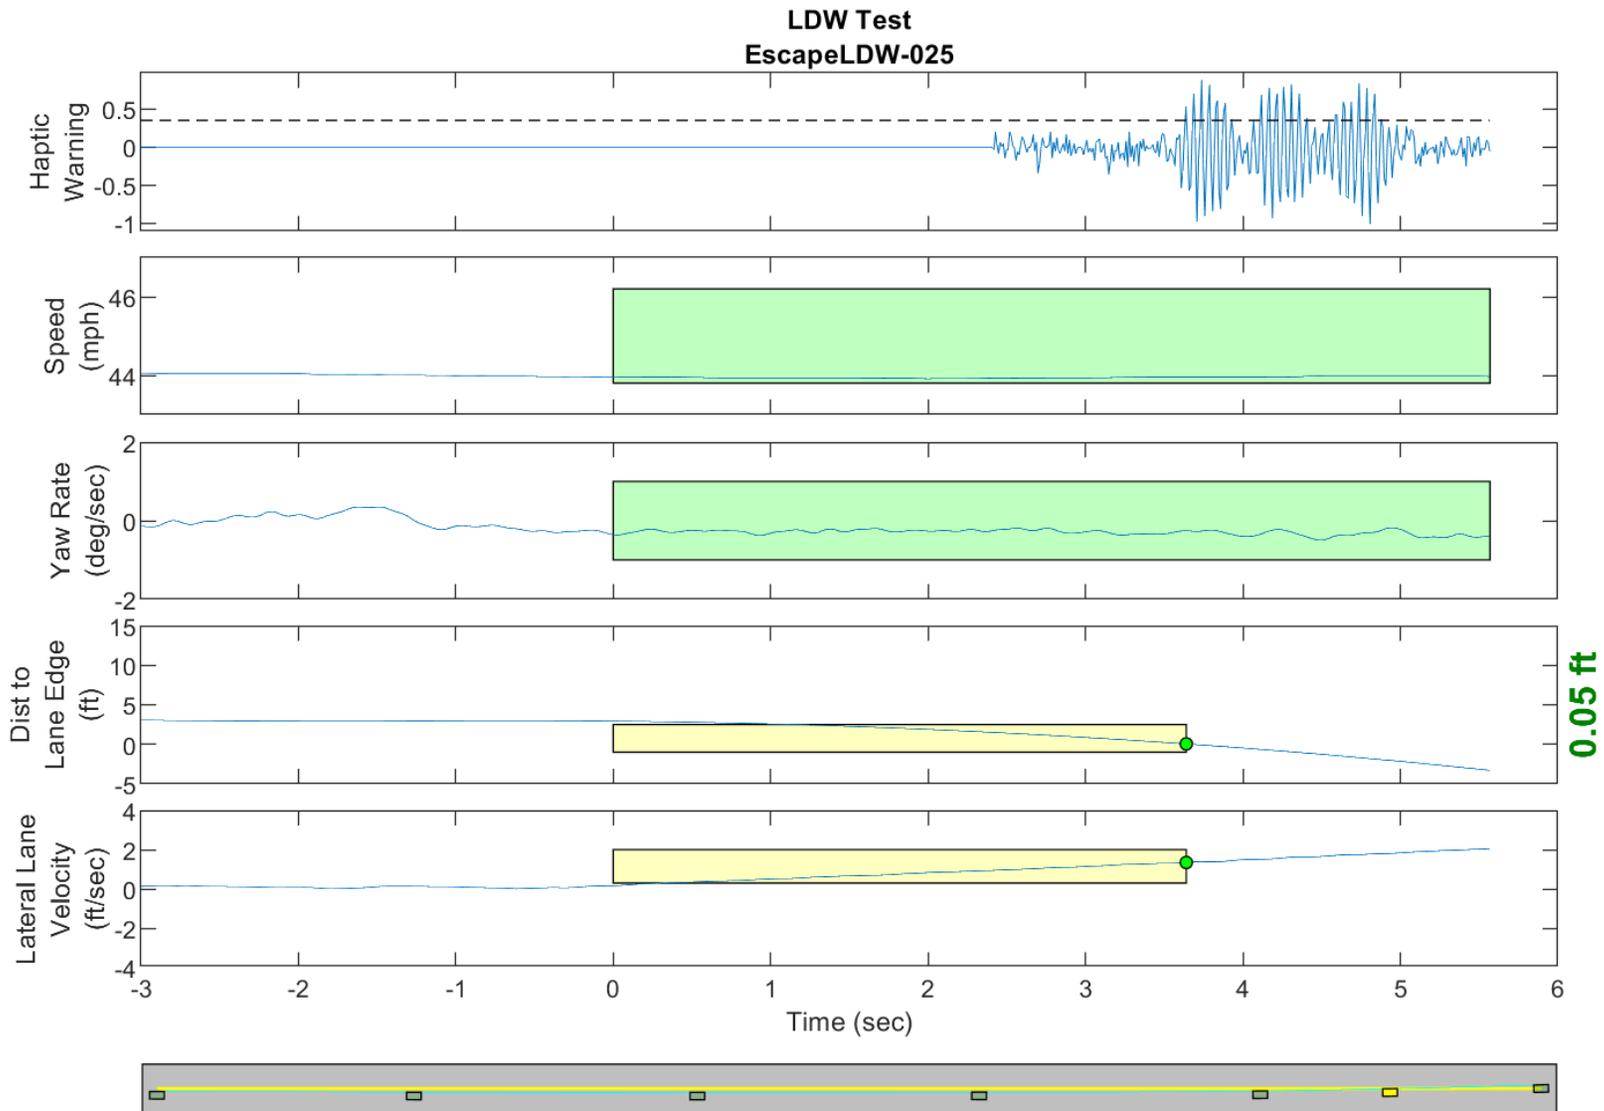


GPS Fix Type: RTK Fixed

Figure D53. Time History for Run 25, Solid Line, Left Departure, Haptic Warning

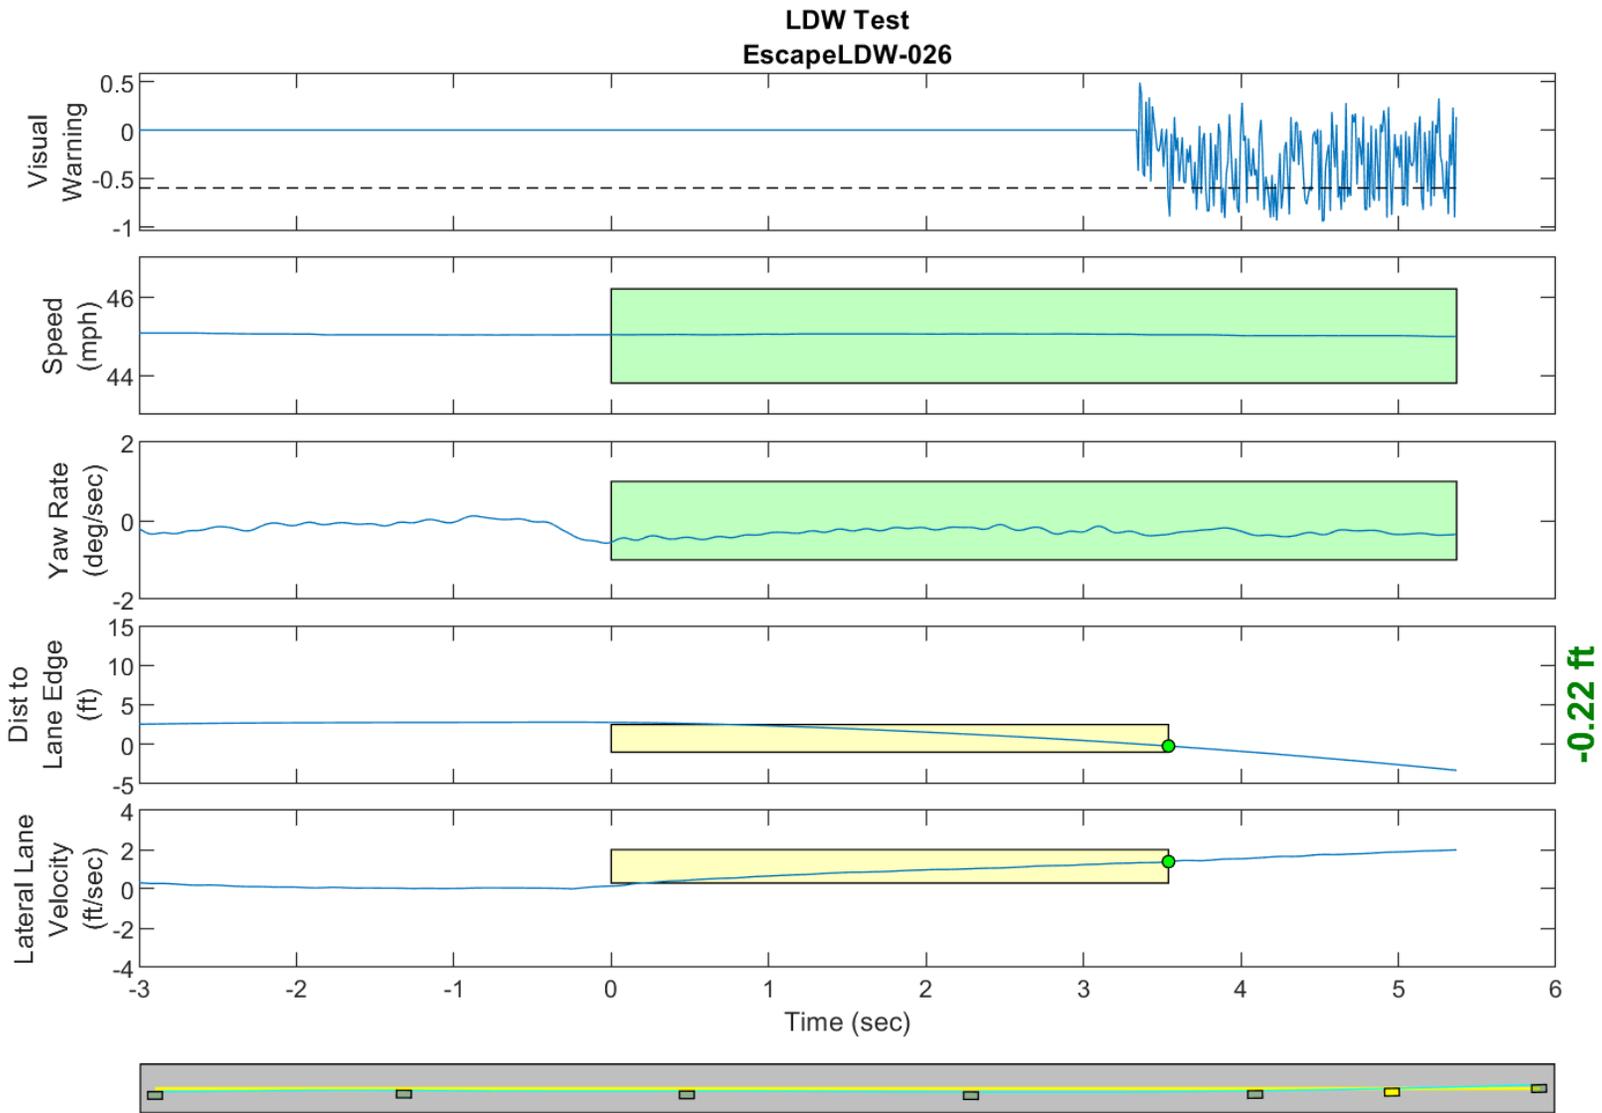


GPS Fix Type: RTK Fixed

Figure D54. Time History for Run 26, Solid Line, Left Departure, Visual Warning

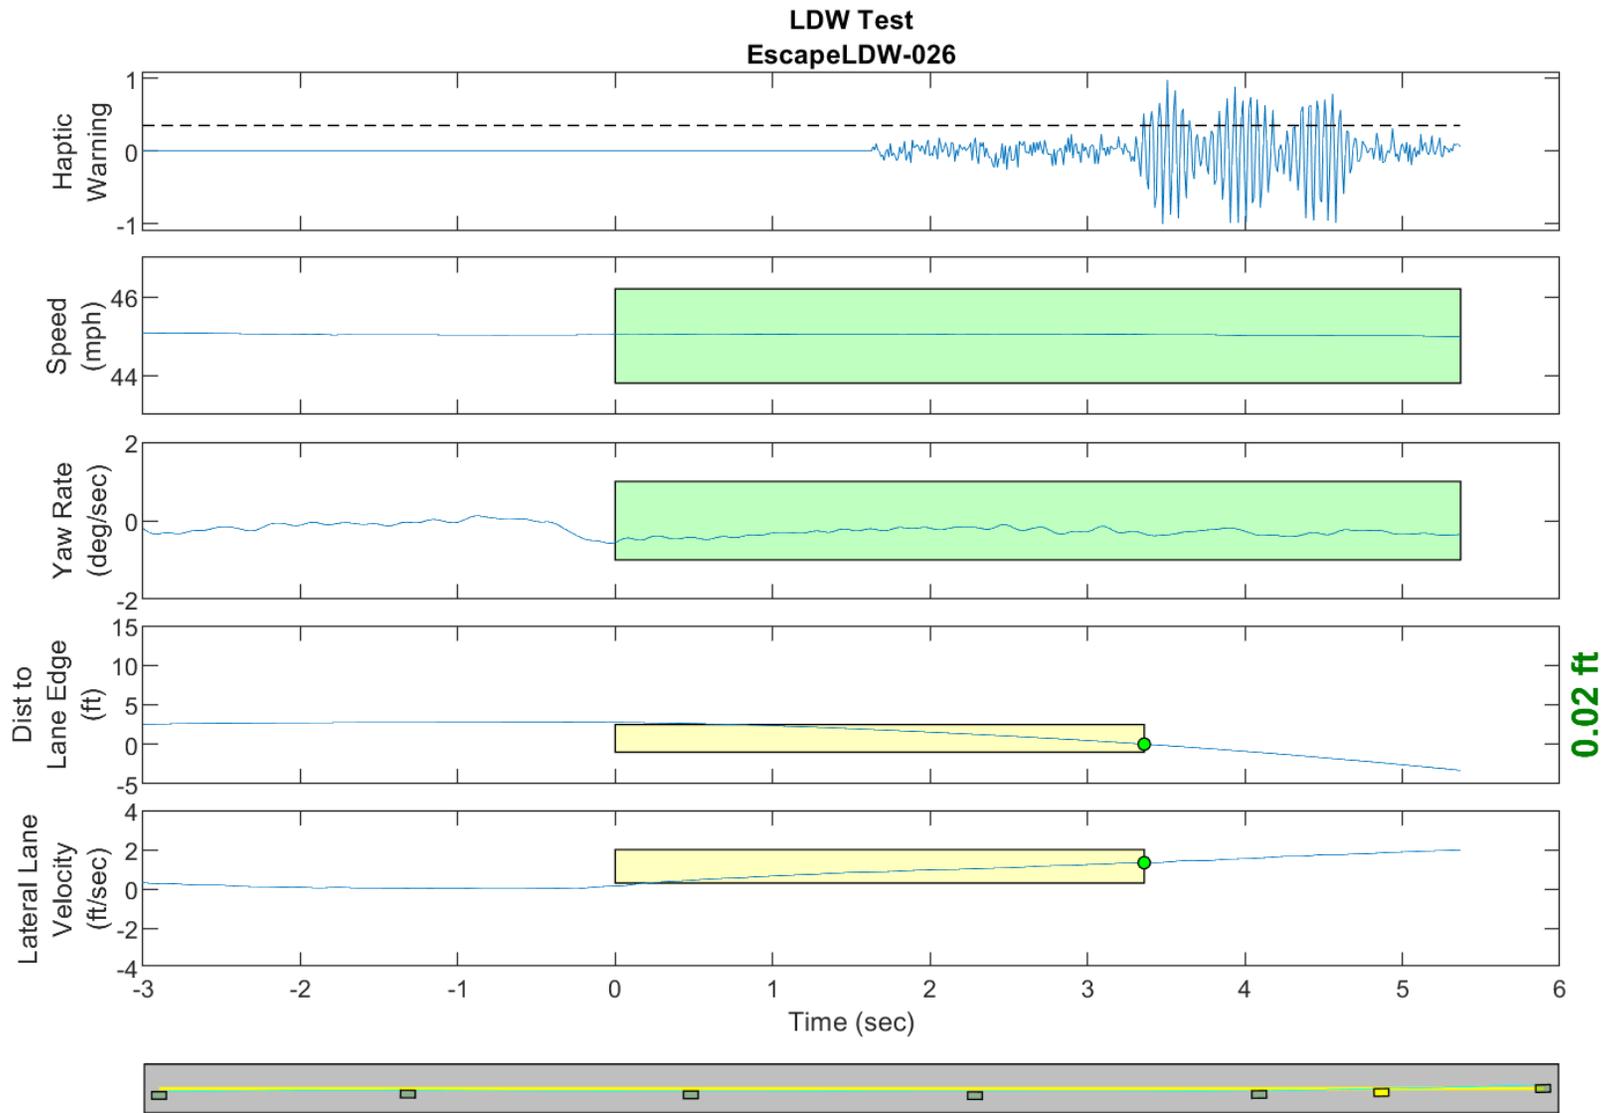


GPS Fix Type: RTK Fixed

Figure D55. Time History for Run 26, Solid Line, Left Departure, Haptic Warning

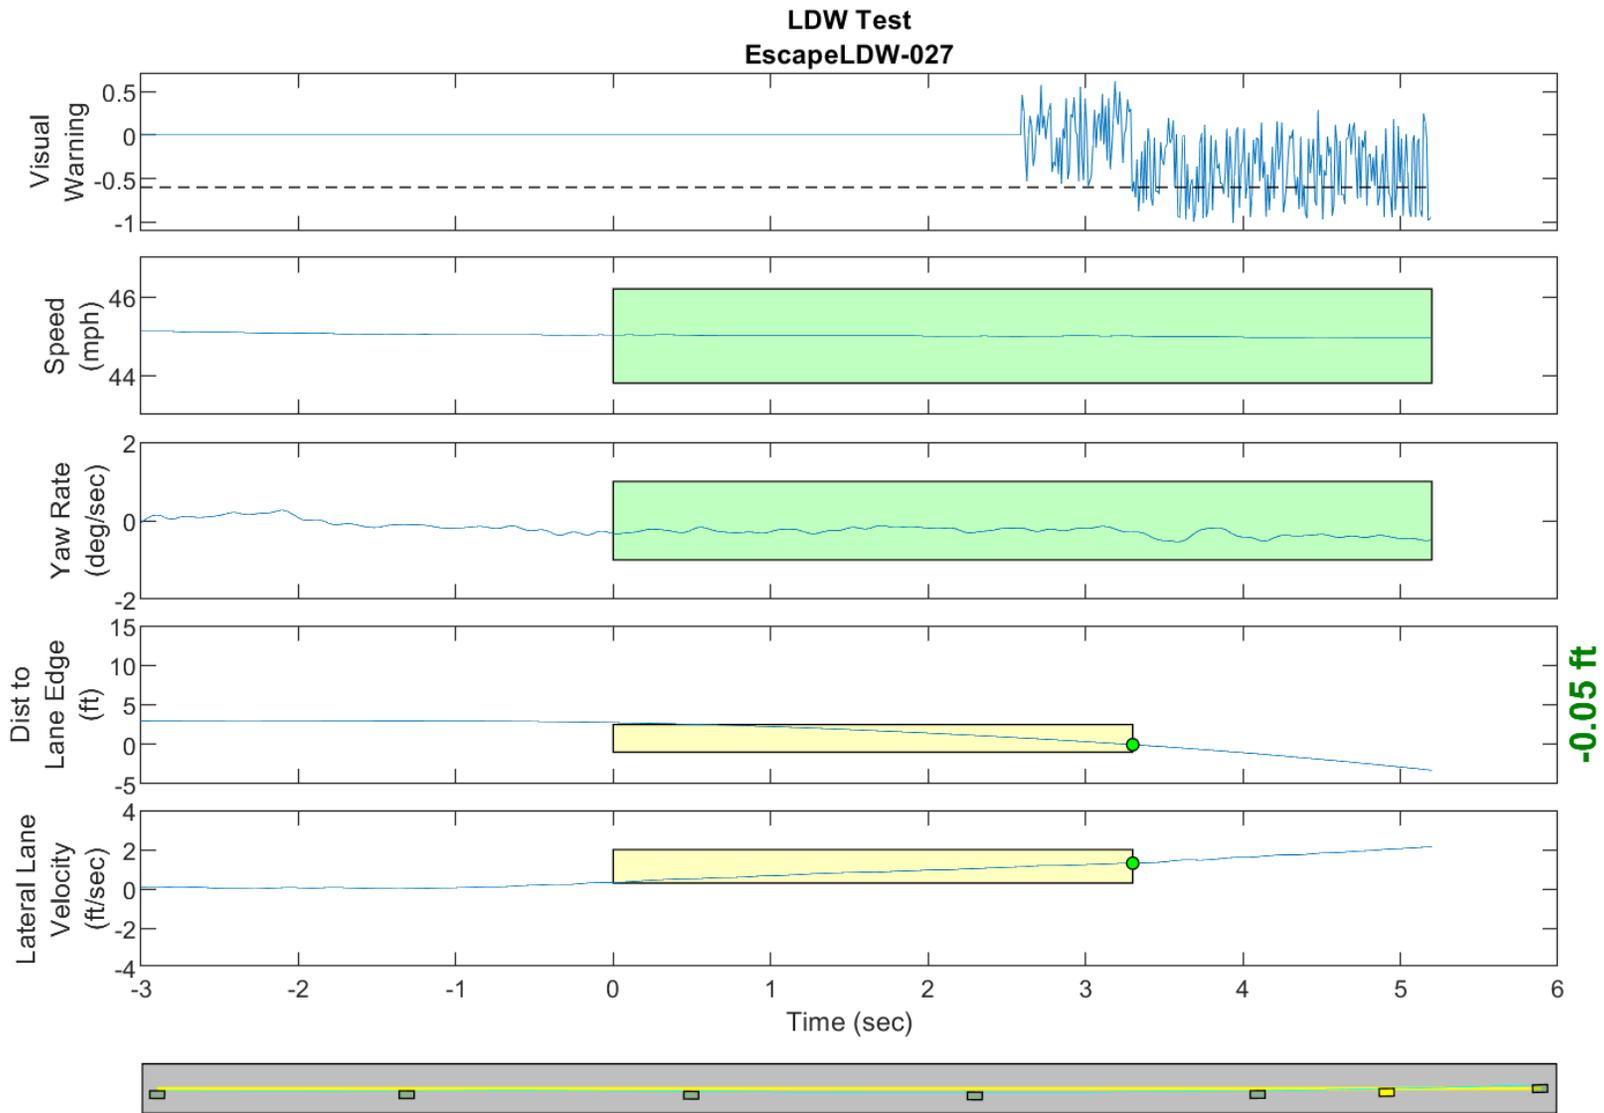


GPS Fix Type: RTK Fixed

Figure D56. Time History for Run 27, Solid Line, Left Departure, Visual Warning

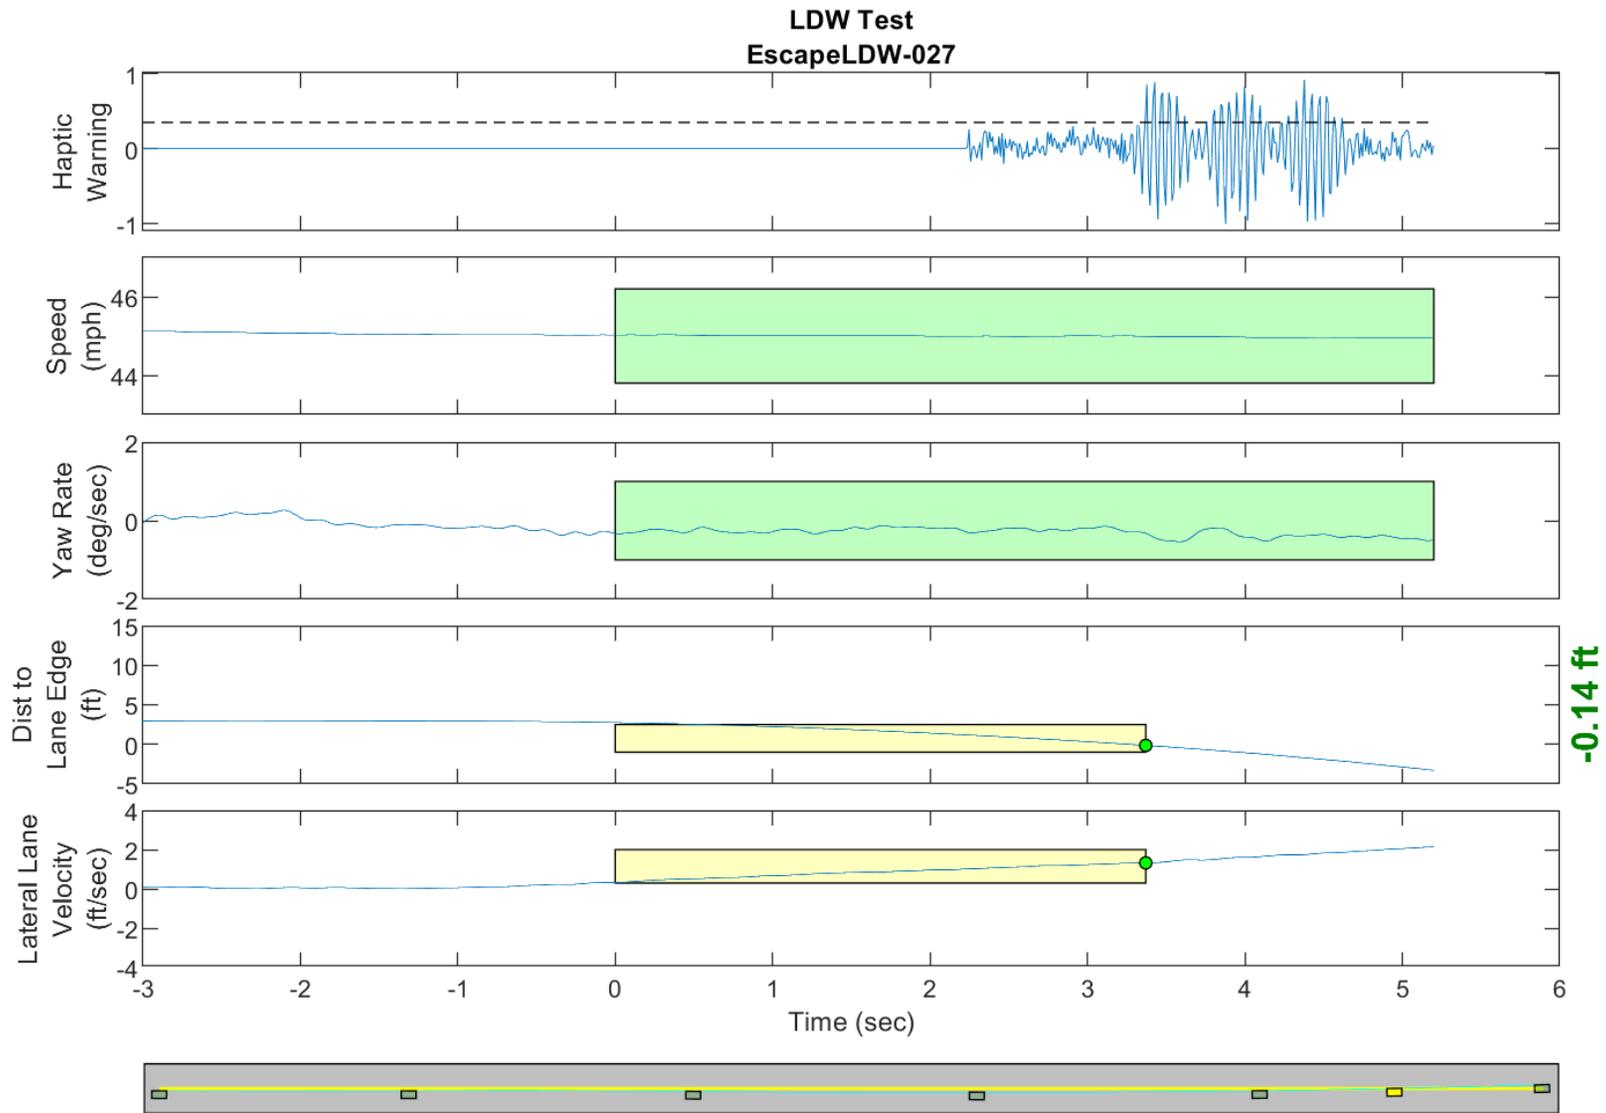


GPS Fix Type: RTK Fixed

Figure D57. Time History for Run 27, Solid Line, Left Departure, Haptic Warning

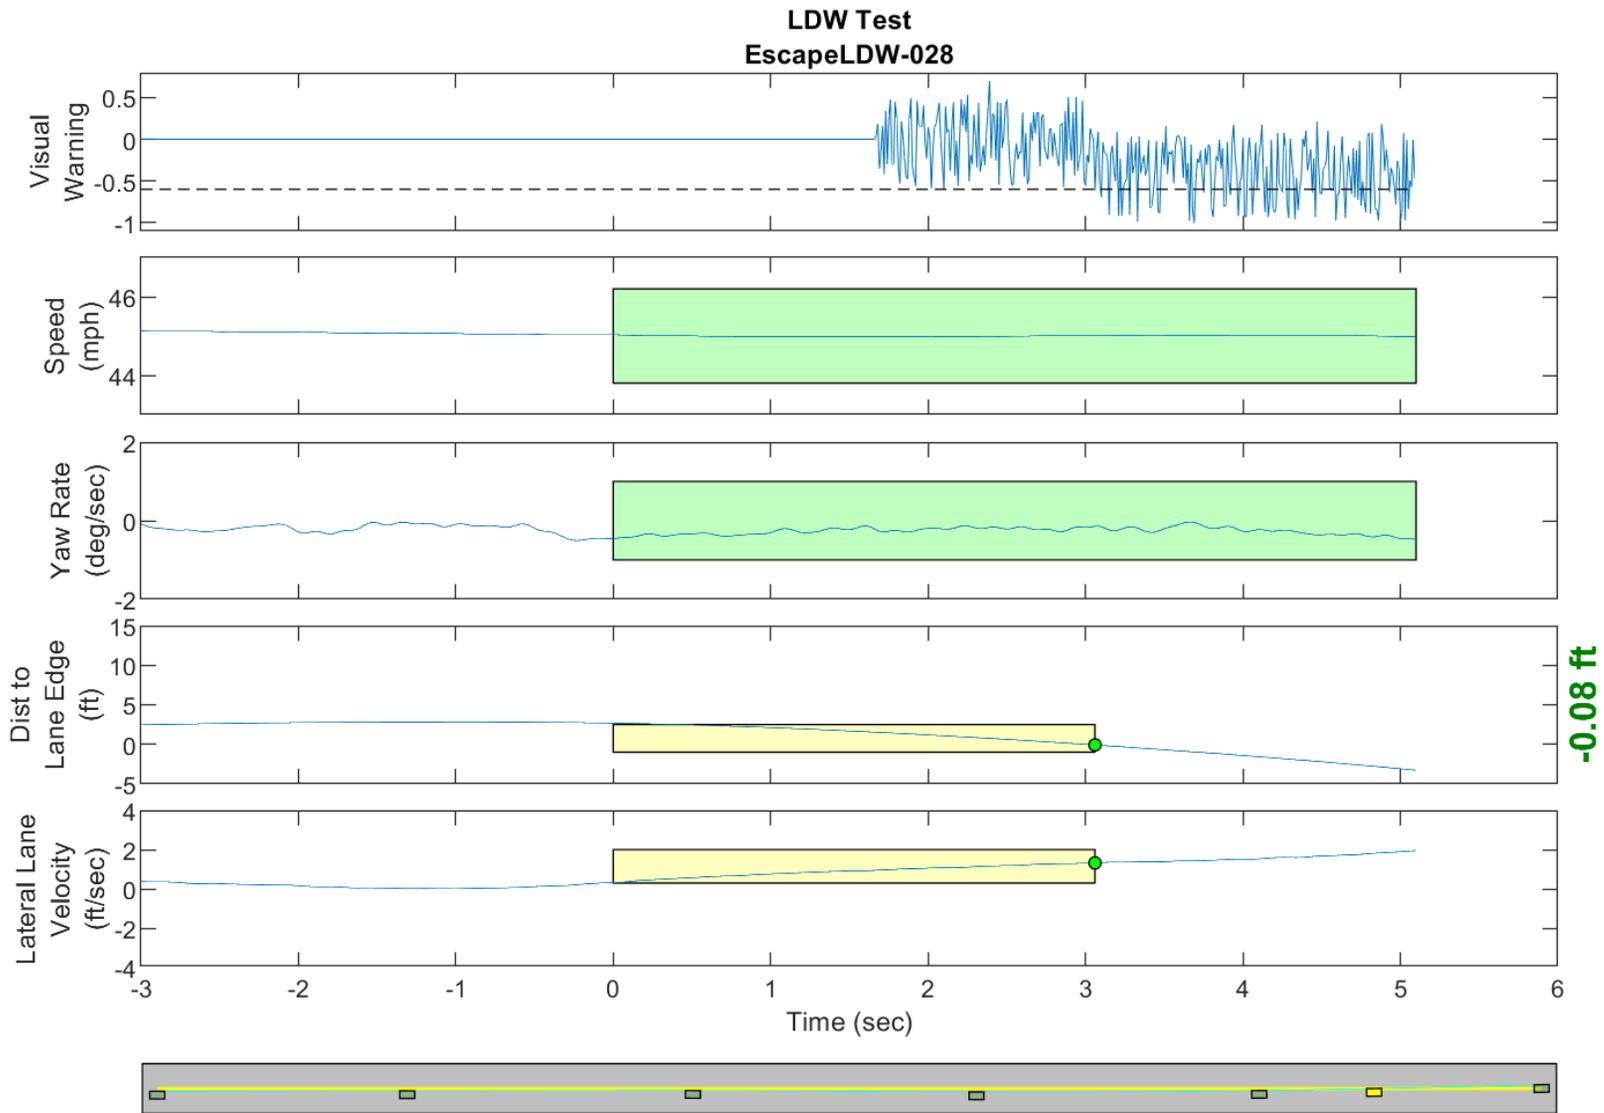


GPS Fix Type: RTK Fixed

Figure D58. Time History for Run 28, Solid Line, Left Departure, Visual Warning

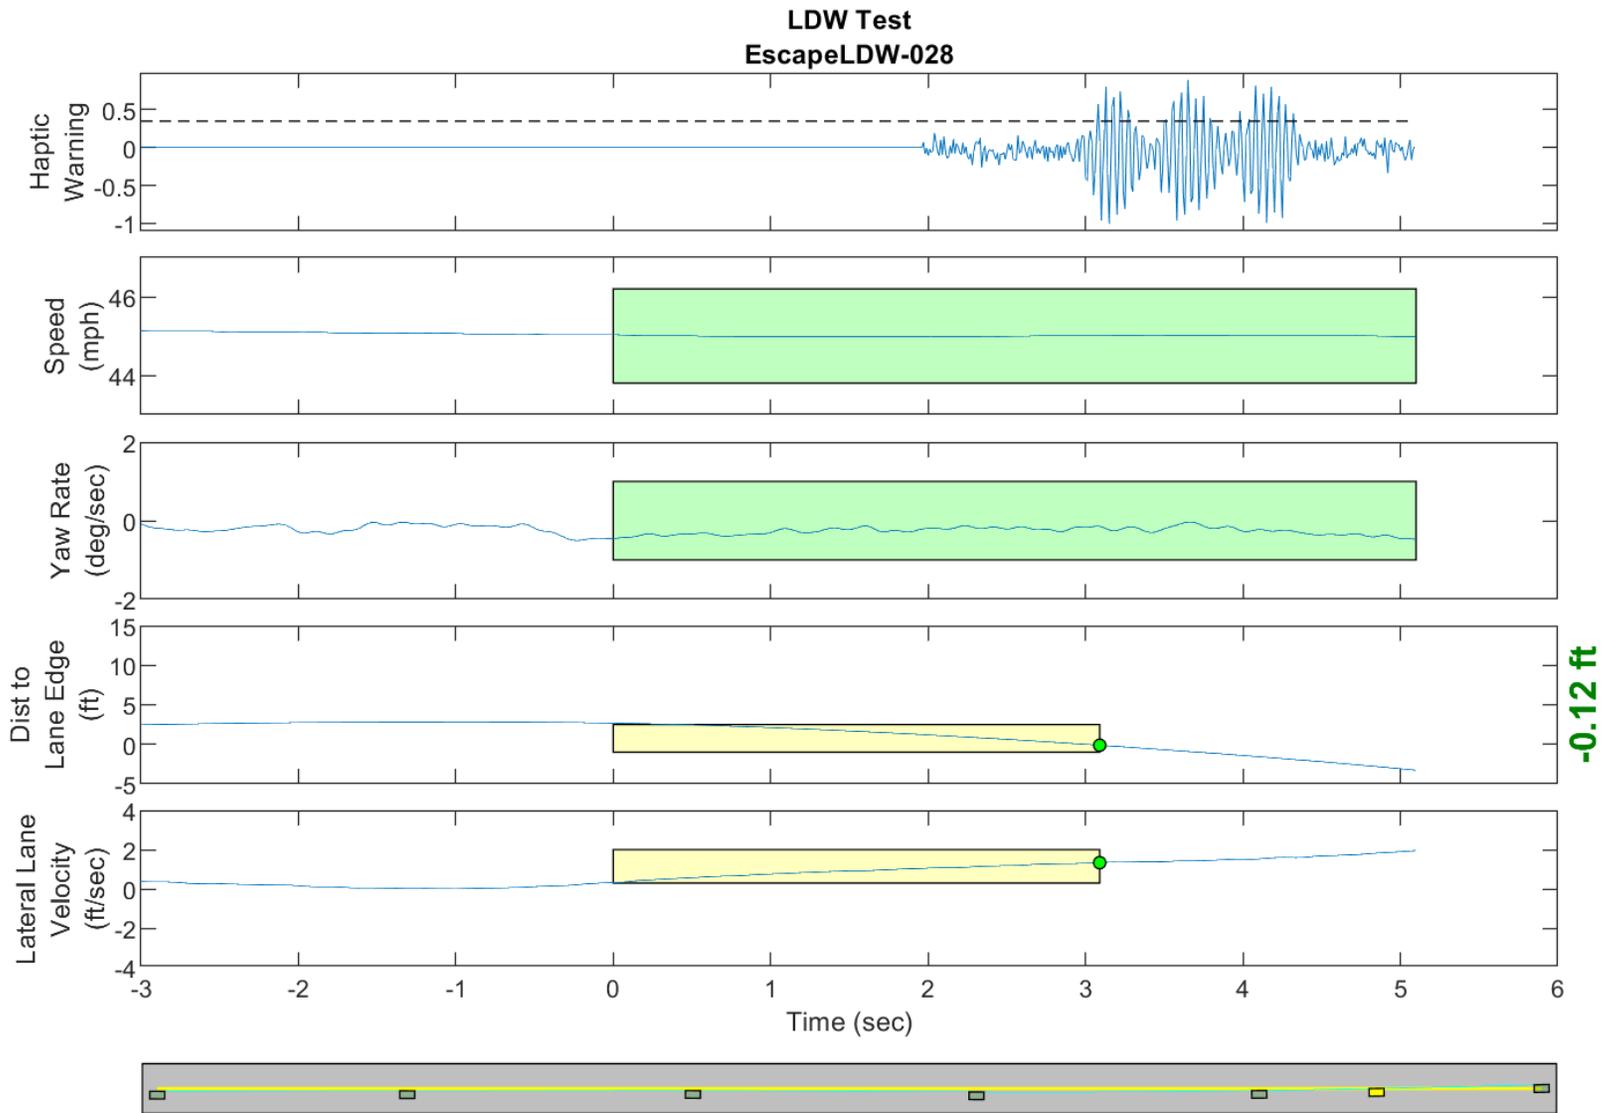


GPS Fix Type: RTK Fixed

Figure D59. Time History for Run 28, Solid Line, Left Departure, Haptic Warning

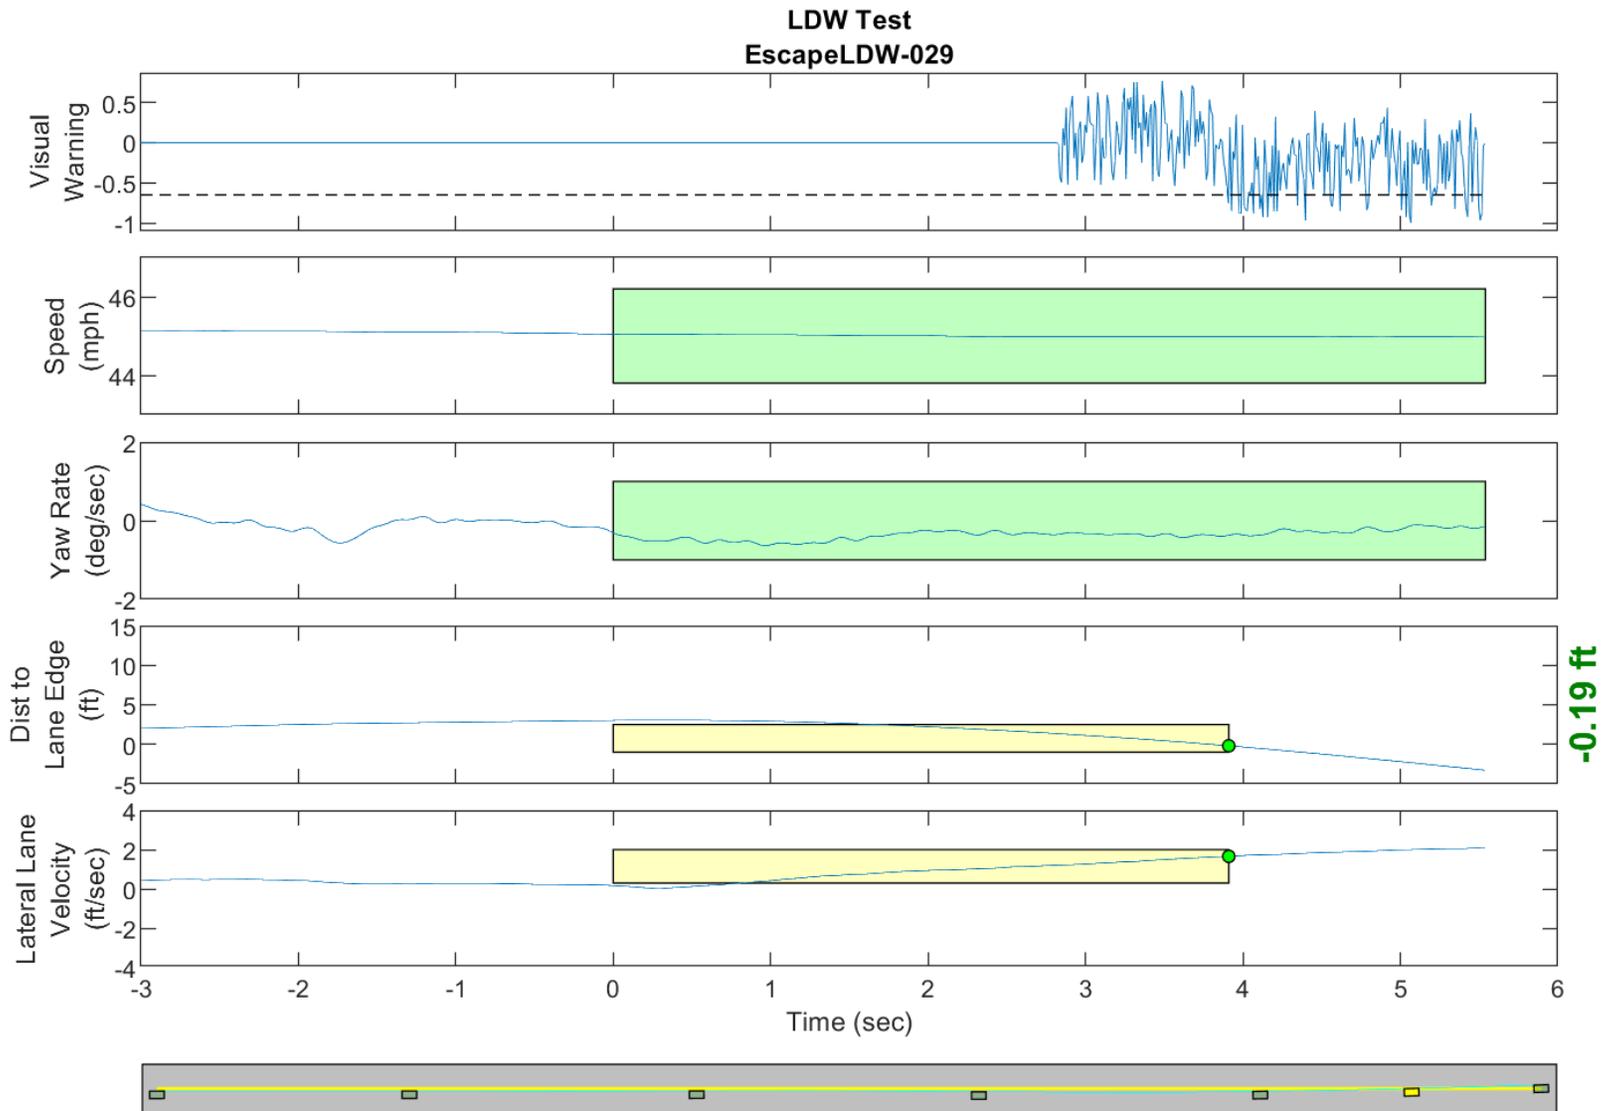


GPS Fix Type: RTK Fixed

Figure D60. Time History for Run 29, Dashed Line, Left Departure, Visual Warning

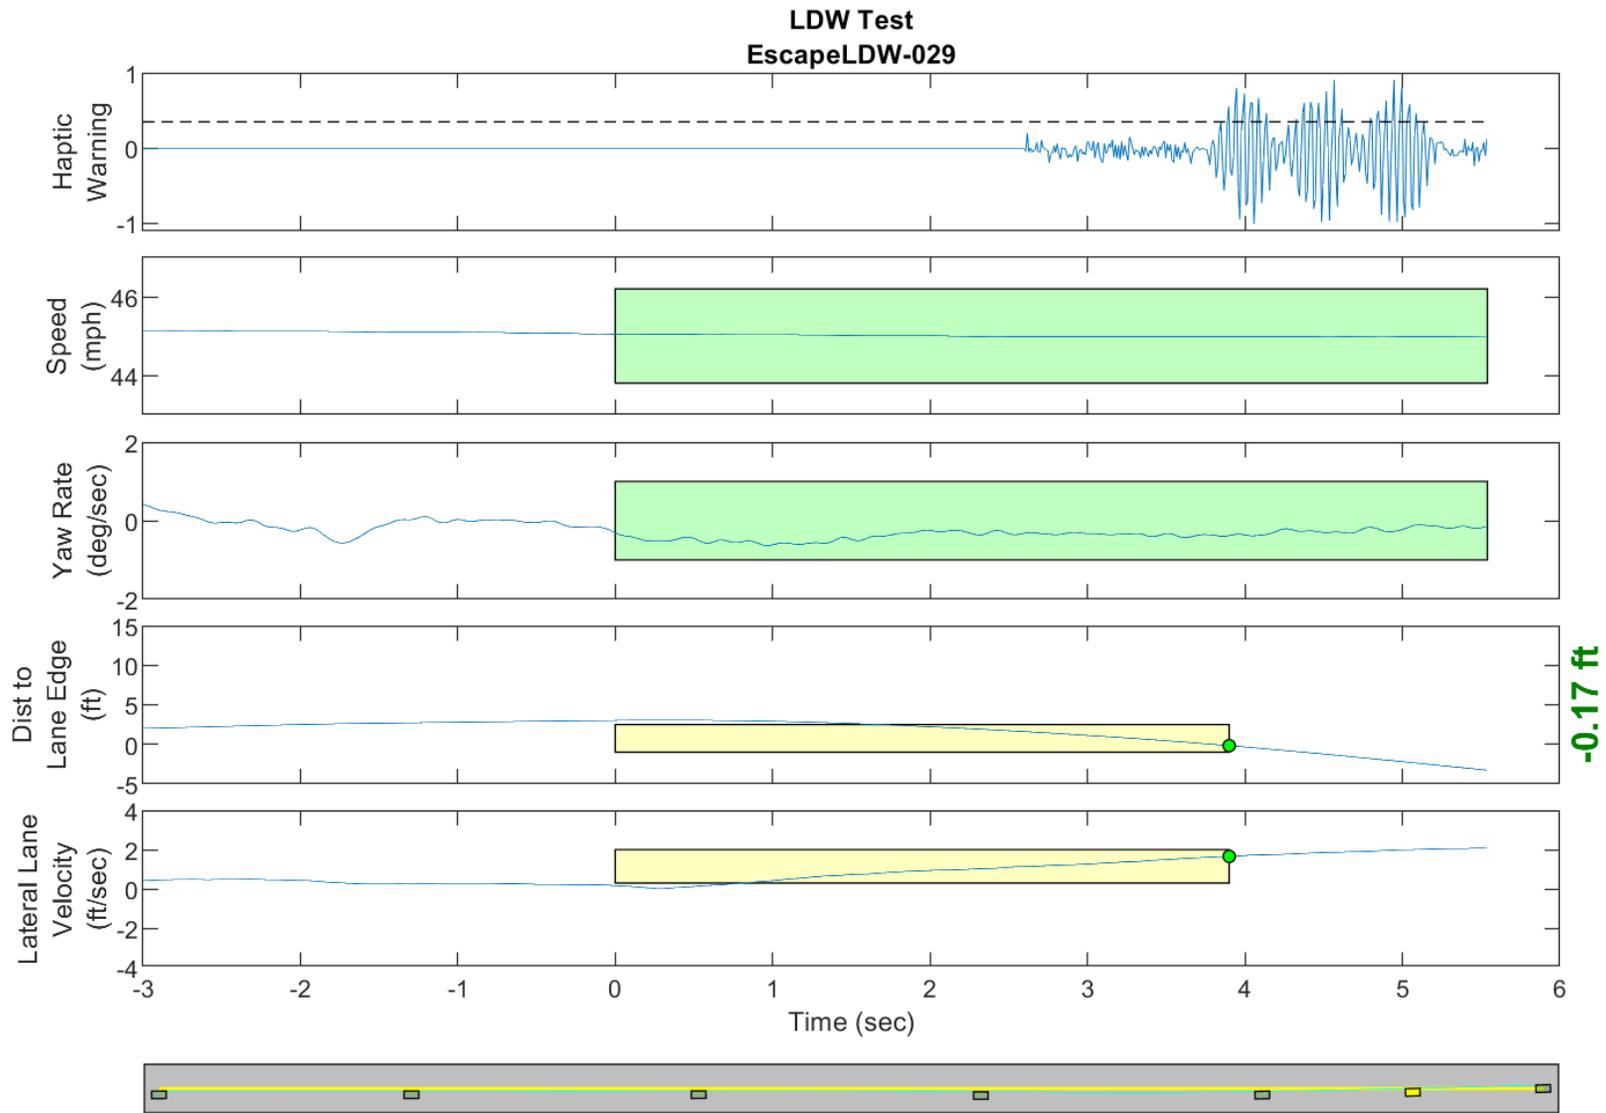


GPS Fix Type: RTK Fixed

Figure D61. Time History for Run 29, Dashed Line, Left Departure, Haptic Warning

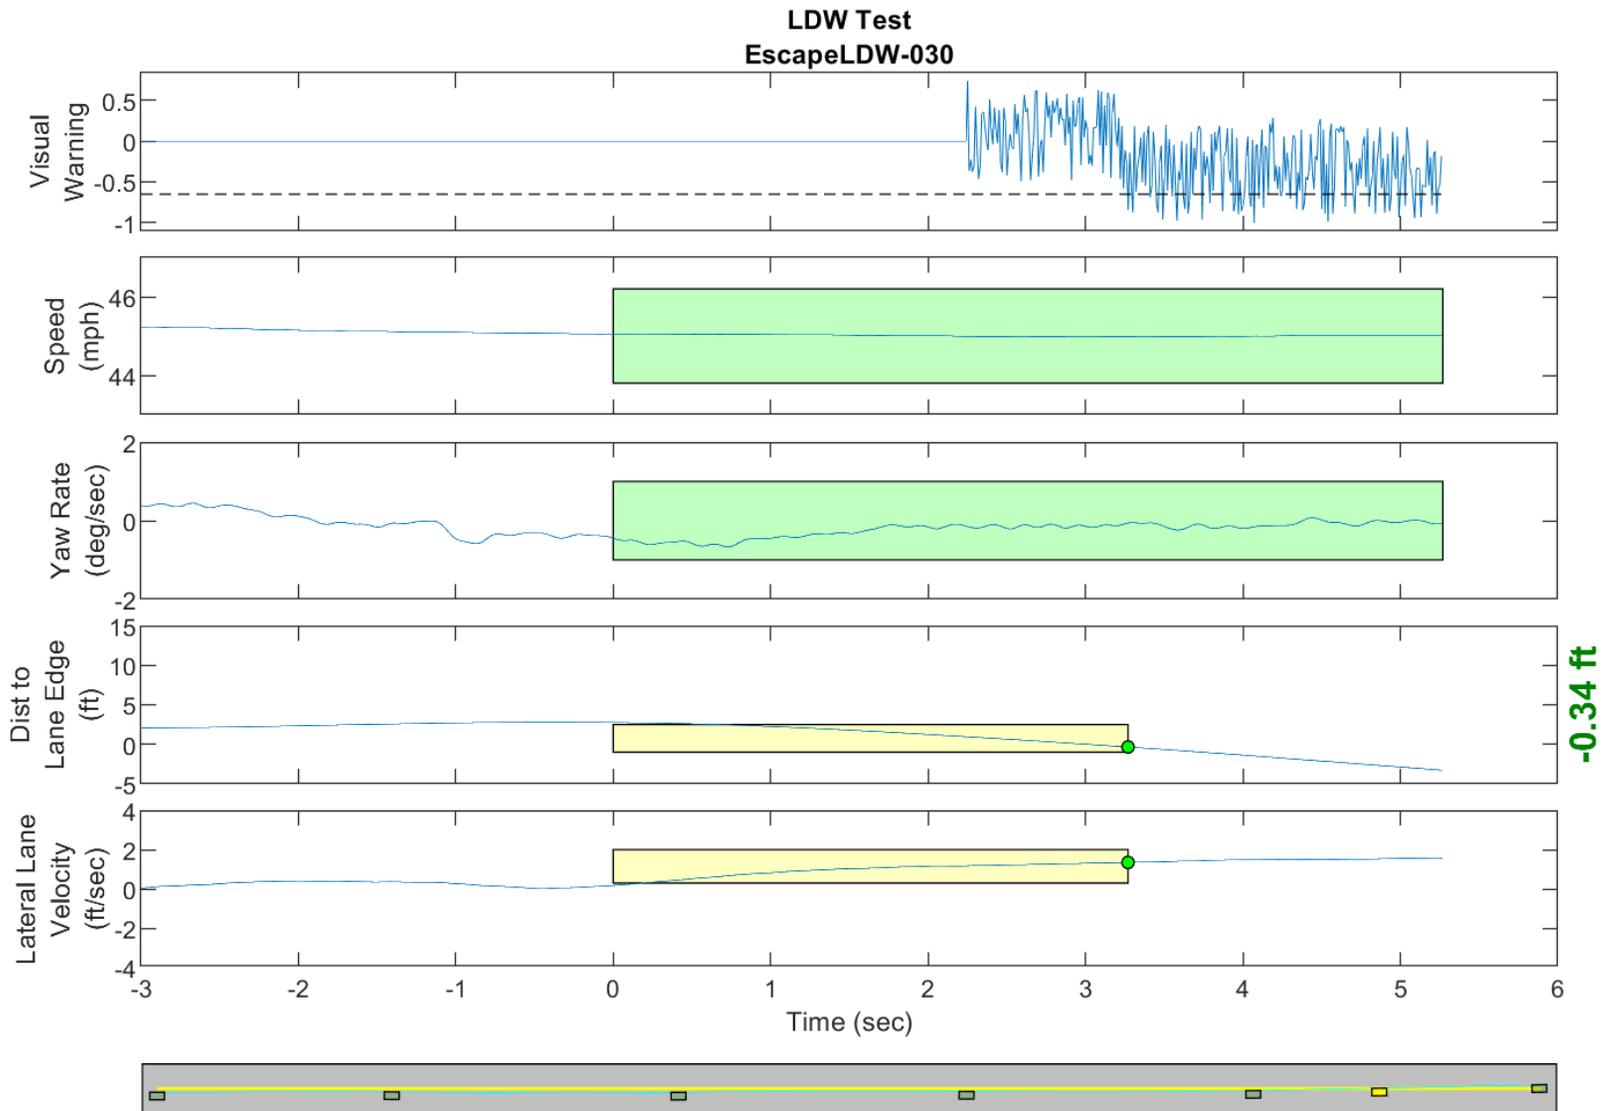


GPS Fix Type: RTK Fixed

Figure D62. Time History for Run 30, Dashed Line, Left Departure, Visual Warning

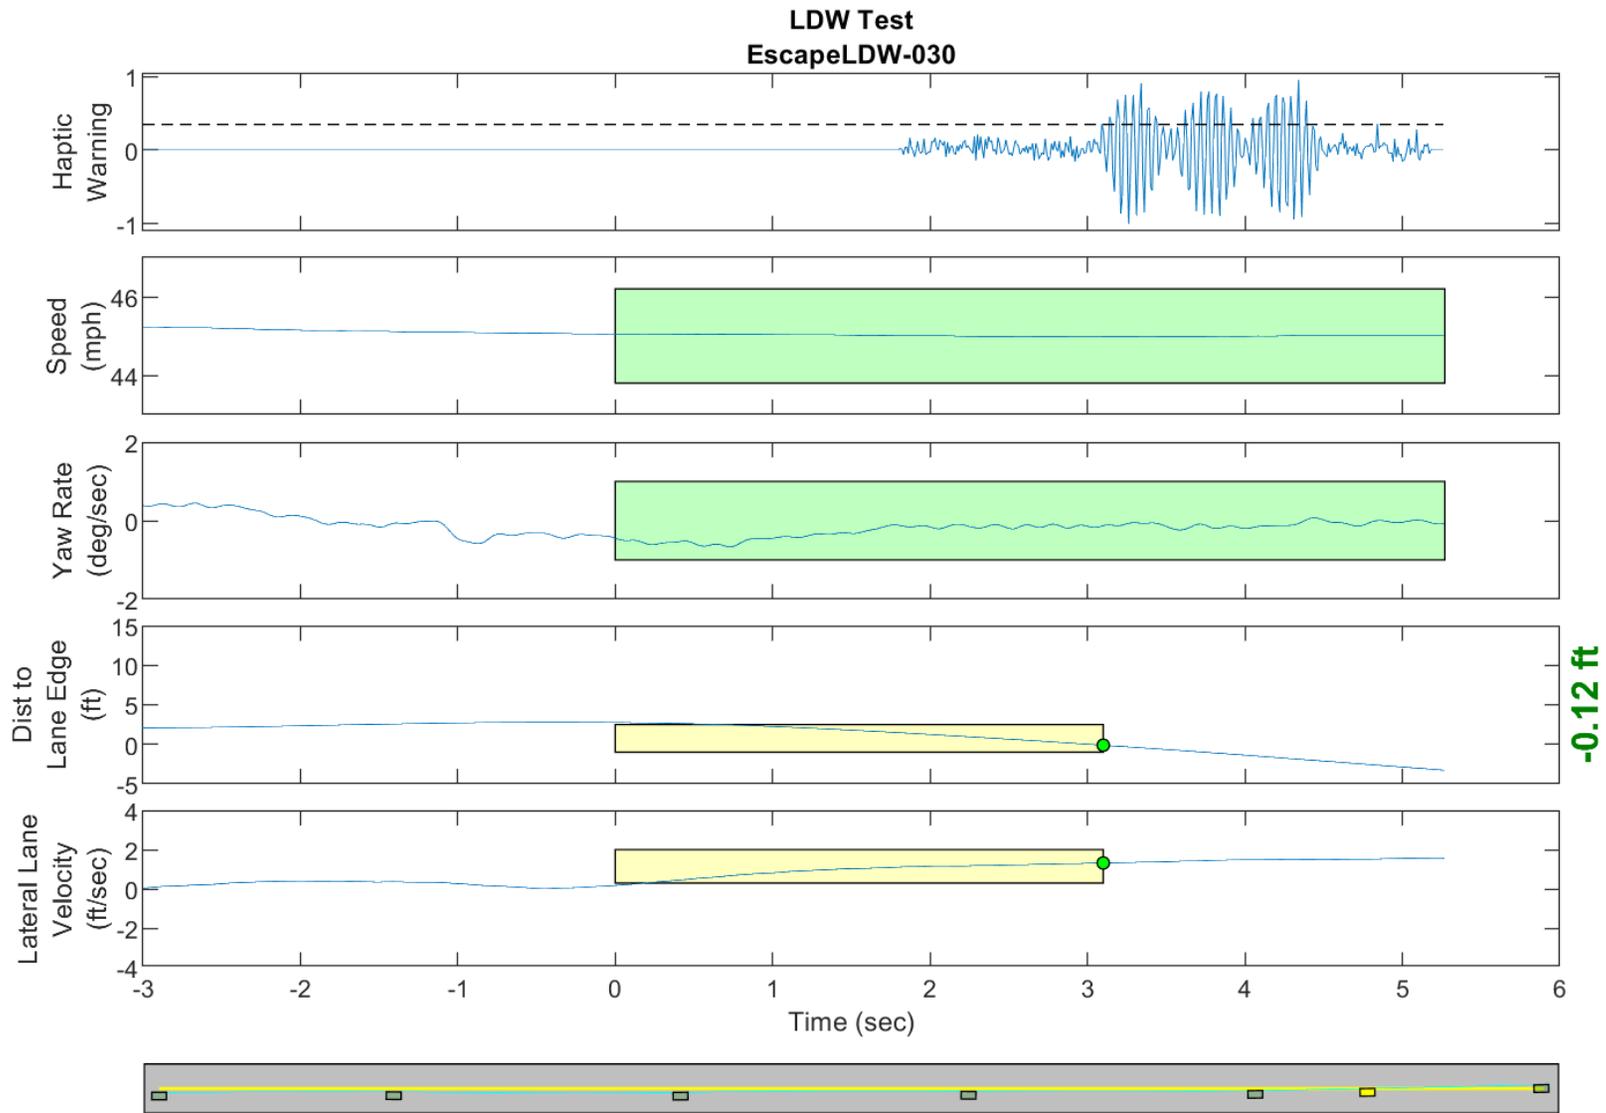


GPS Fix Type: RTK Fixed

Figure D63. Time History for Run 30, Dashed Line, Left Departure, Haptic Warning

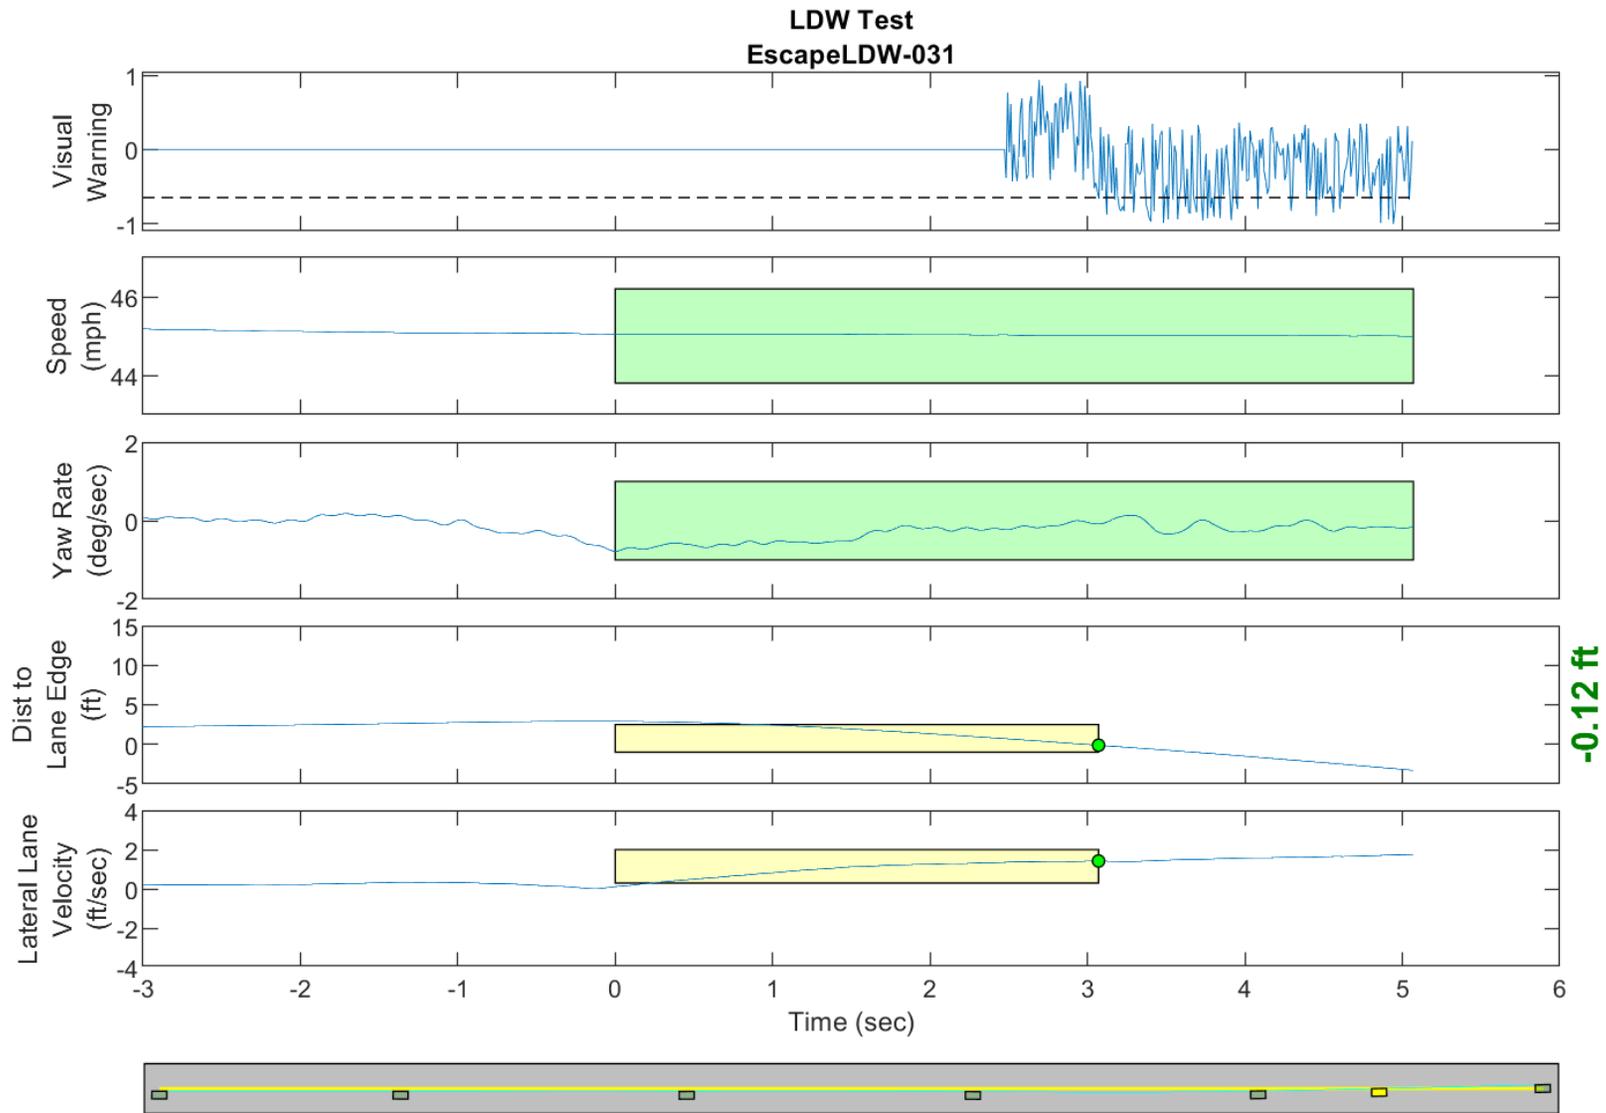


GPS Fix Type: RTK Fixed

Figure D64. Time History for Run 31, Dashed Line, Left Departure, Visual Warning

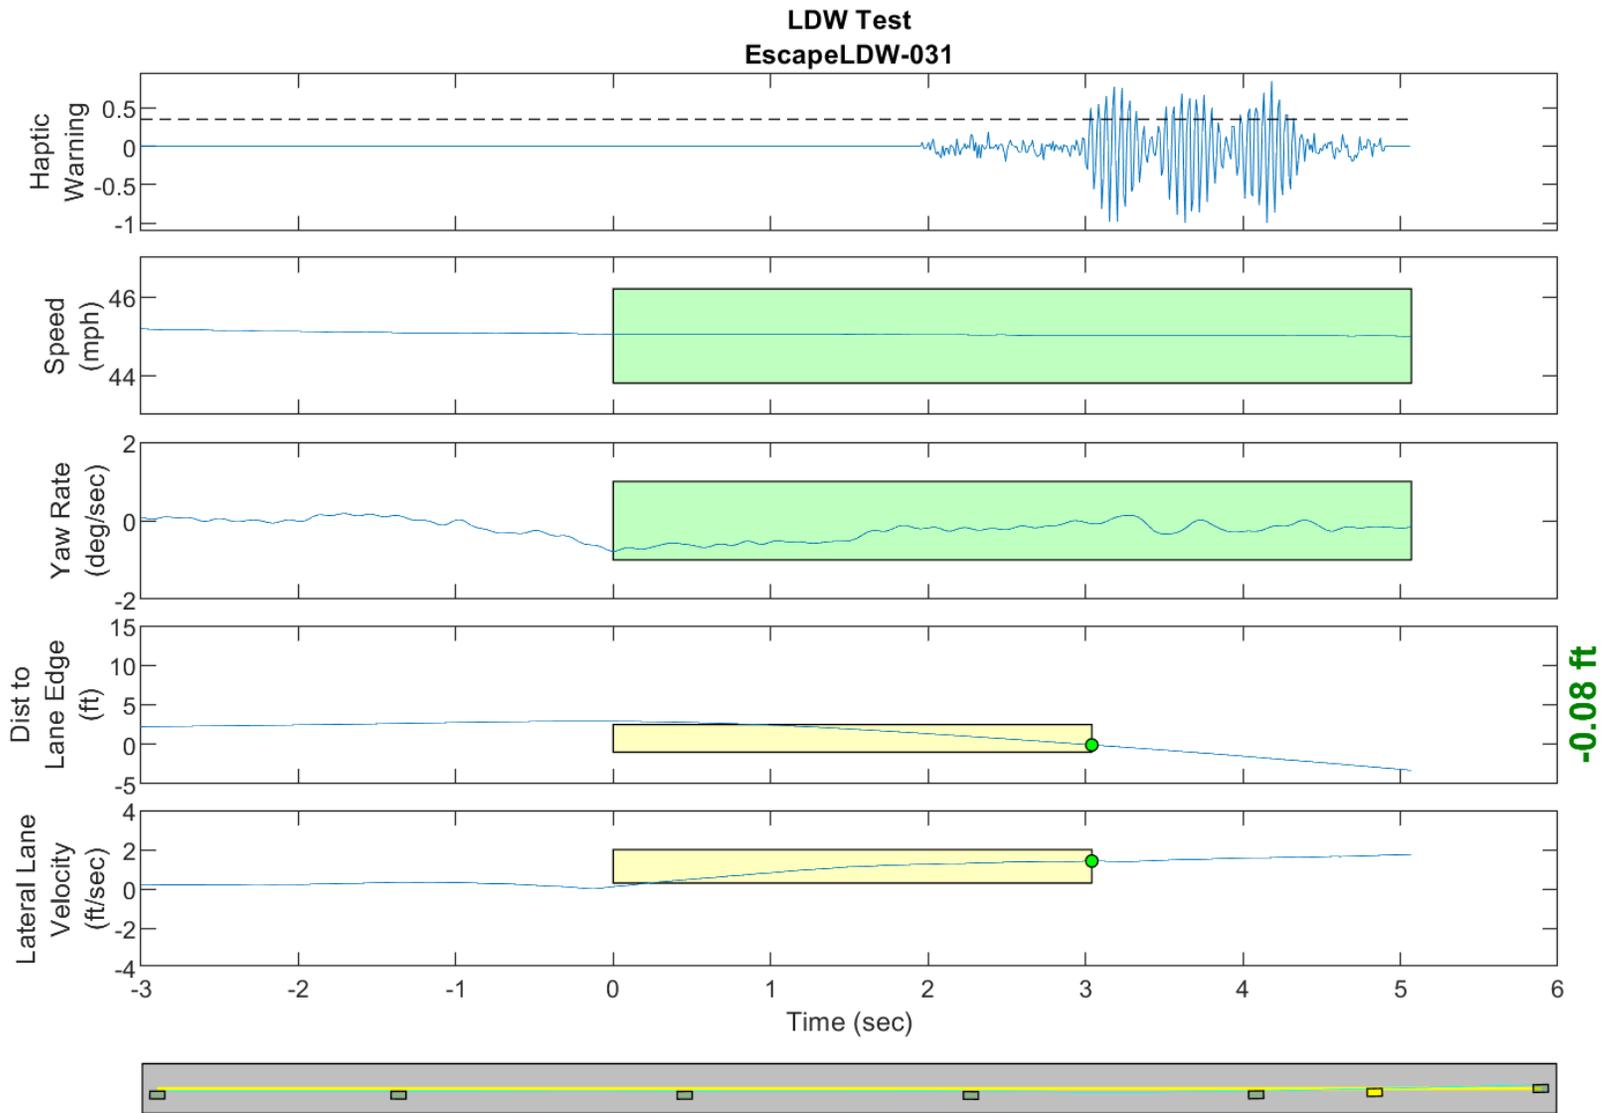


GPS Fix Type: RTK Fixed

Figure D65. Time History for Run 31, Dashed Line, Left Departure, Haptic Warning

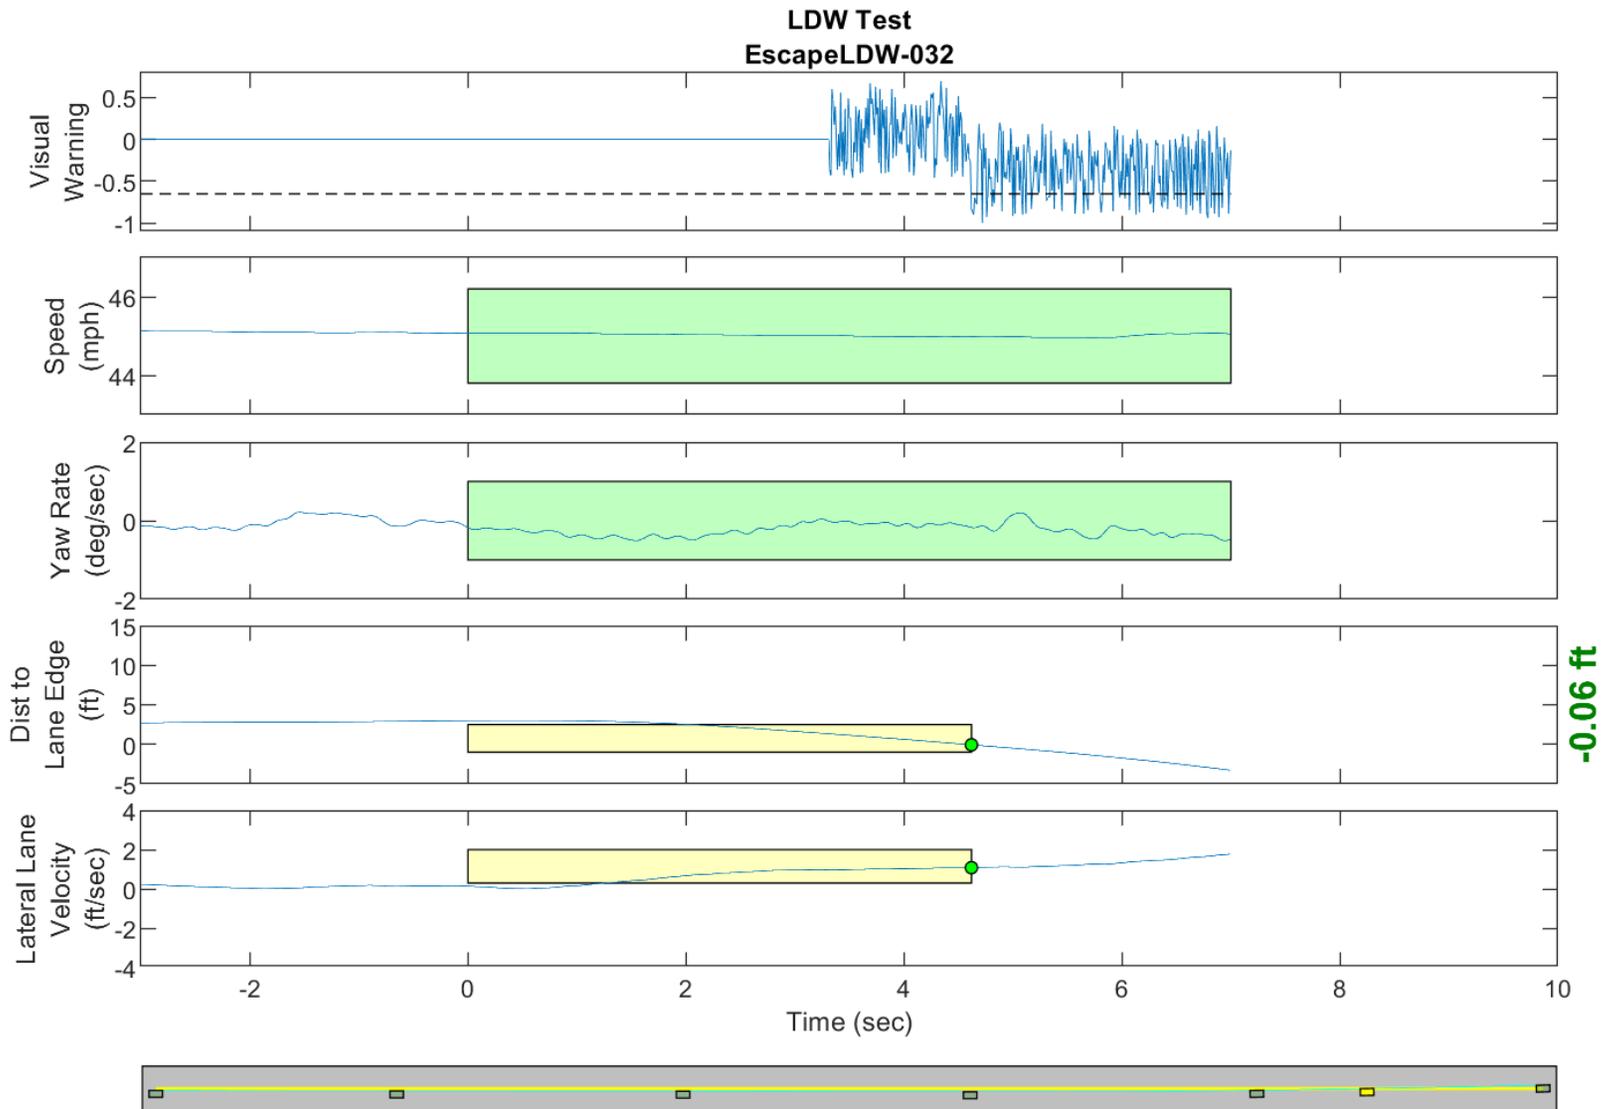


GPS Fix Type: RTK Fixed

Figure D66. Time History for Run 32, Dashed Line, Left Departure, Visual Warning

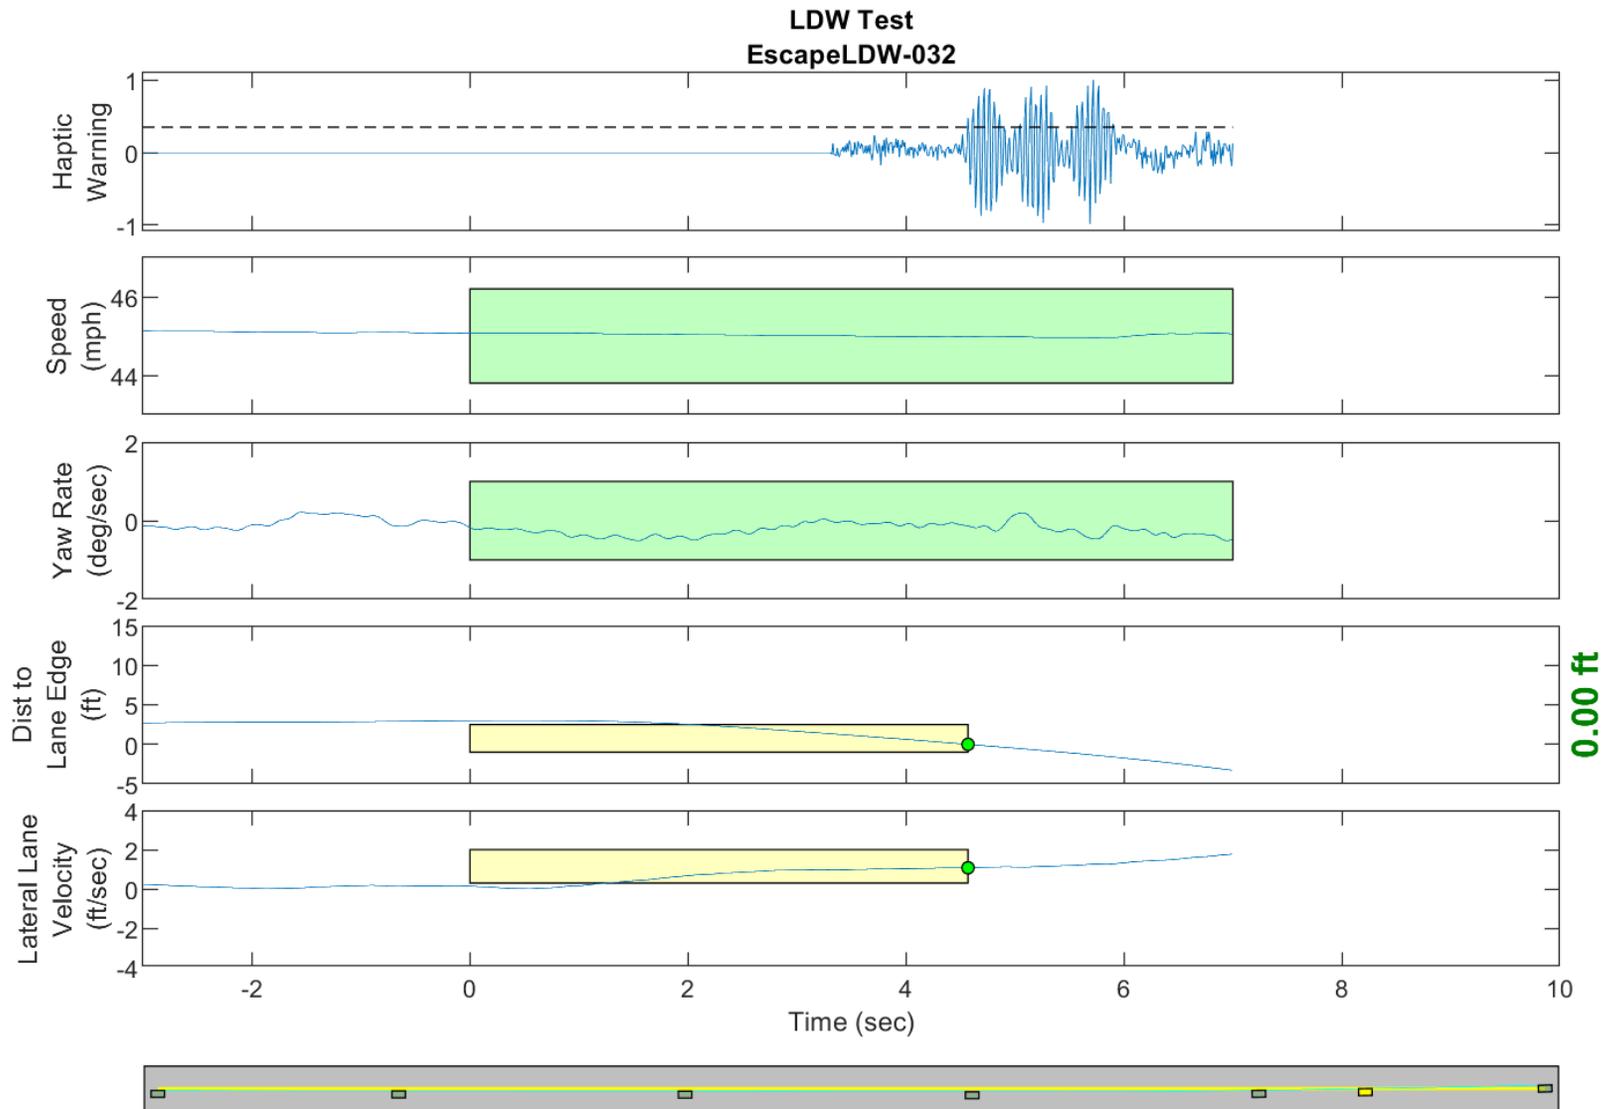


GPS Fix Type: RTK Fixed

Figure D67. Time History for Run 32, Dashed Line, Left Departure, Haptic Warning

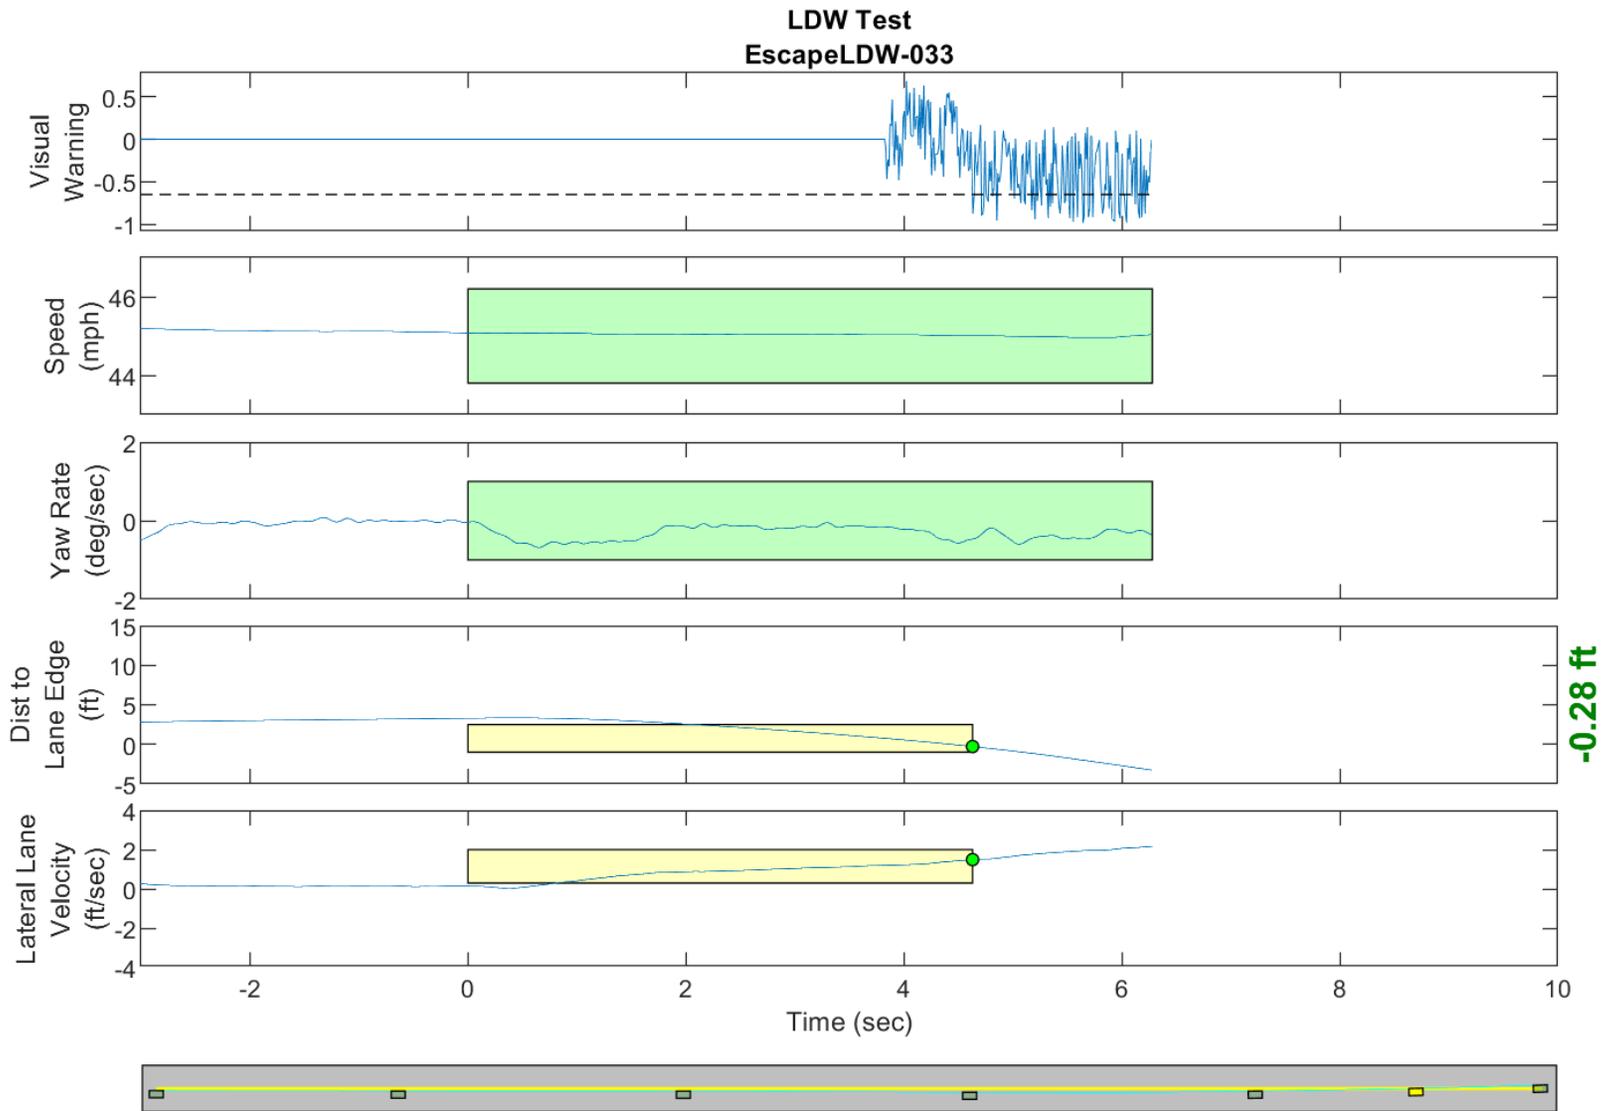


GPS Fix Type: RTK Fixed

Figure D68. Time History for Run 33, Dashed Line, Left Departure, Visual Warning

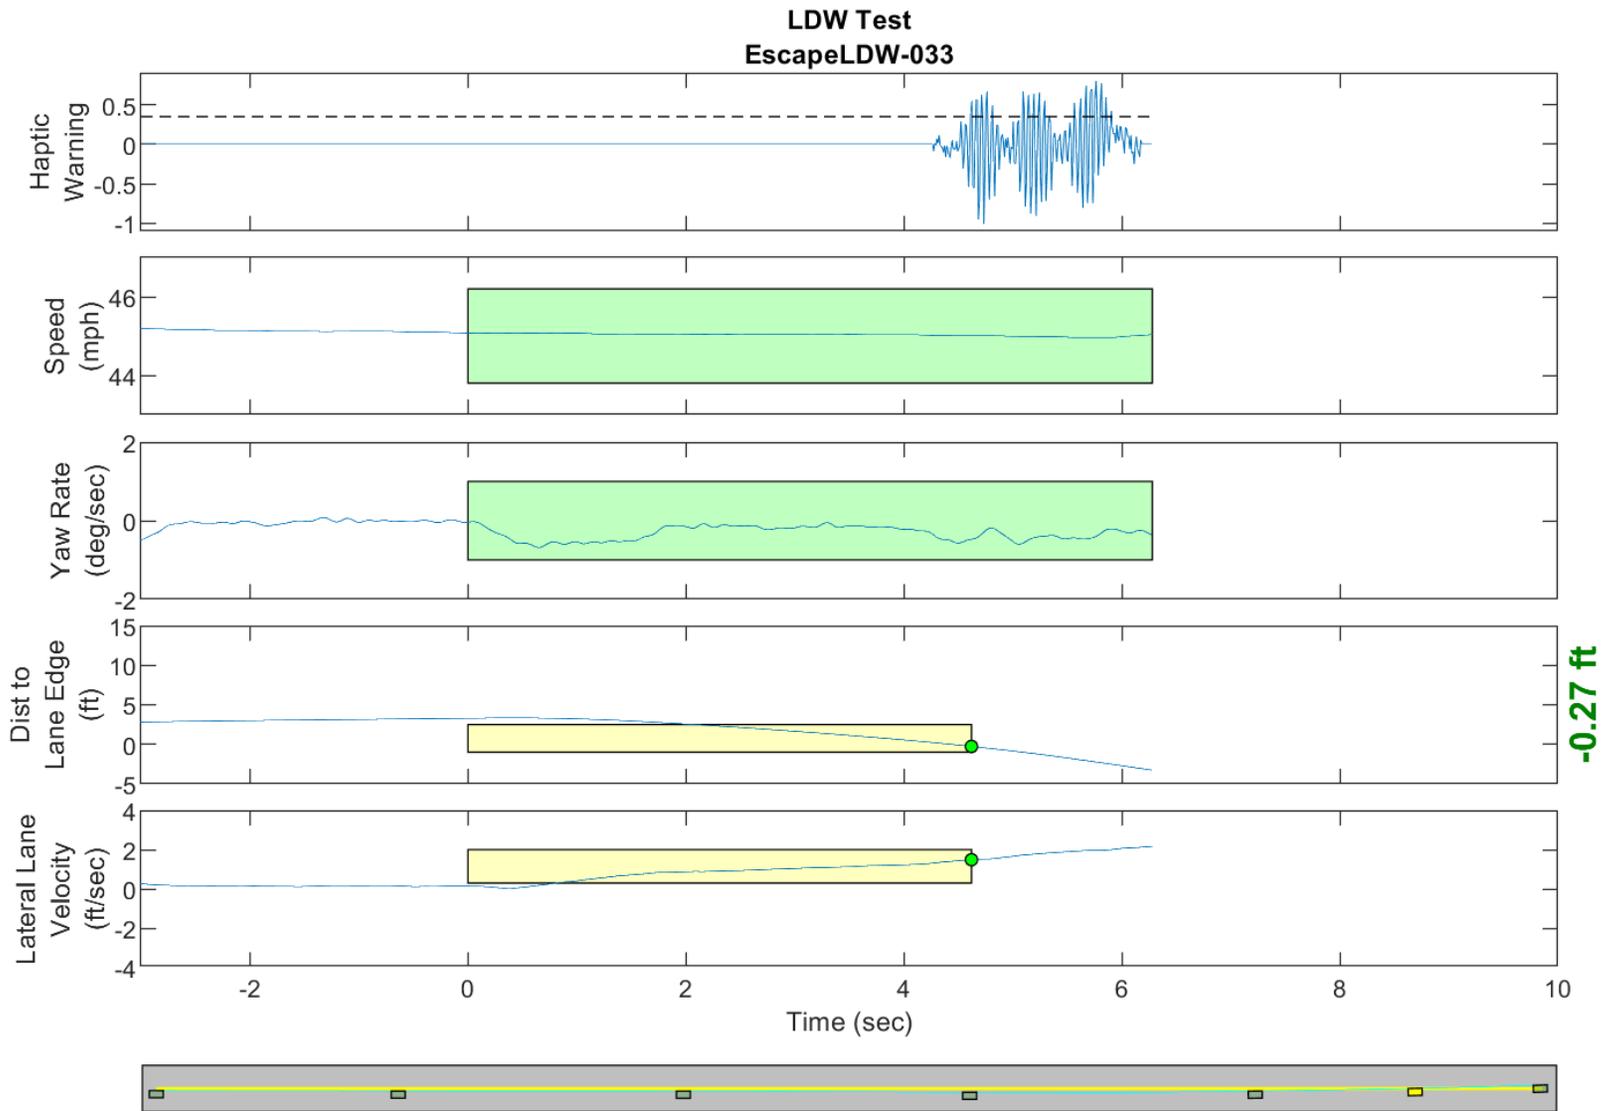


GPS Fix Type: RTK Fixed

Figure D69. Time History for Run 33, Dashed Line, Left Departure, Haptic Warning

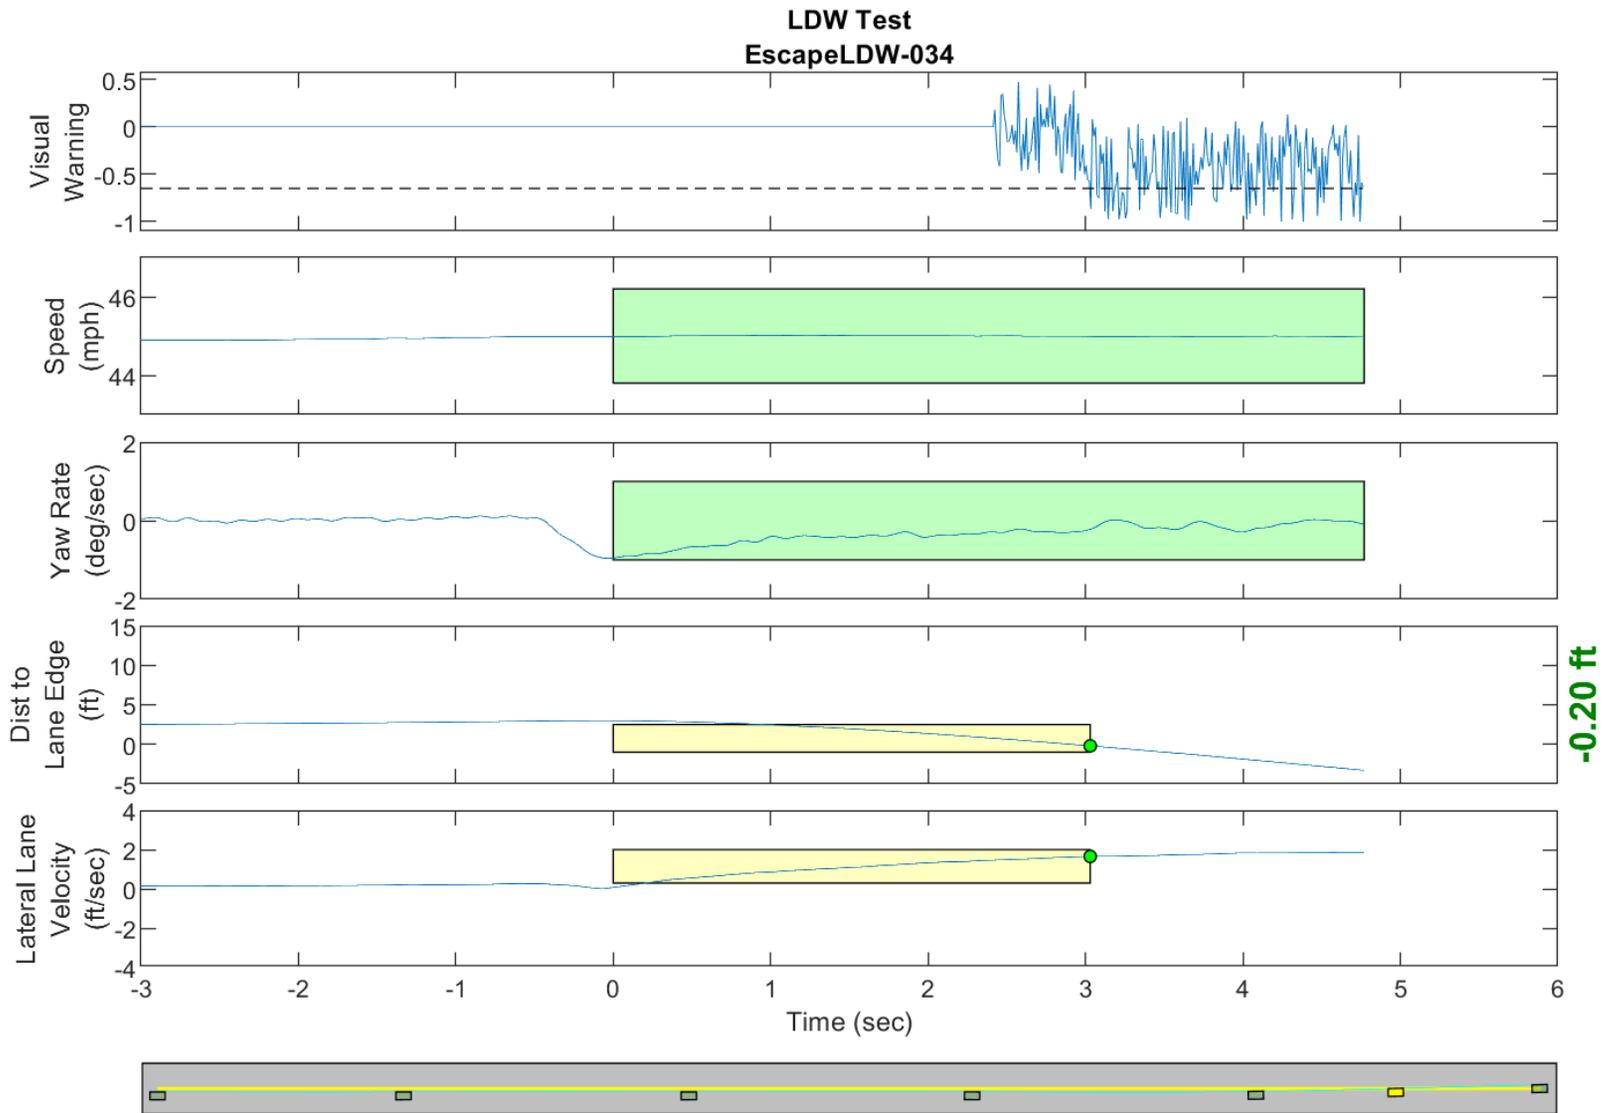


GPS Fix Type: RTK Fixed

Figure D70. Time History for Run 34, Dashed Line, Left Departure, Visual Warning

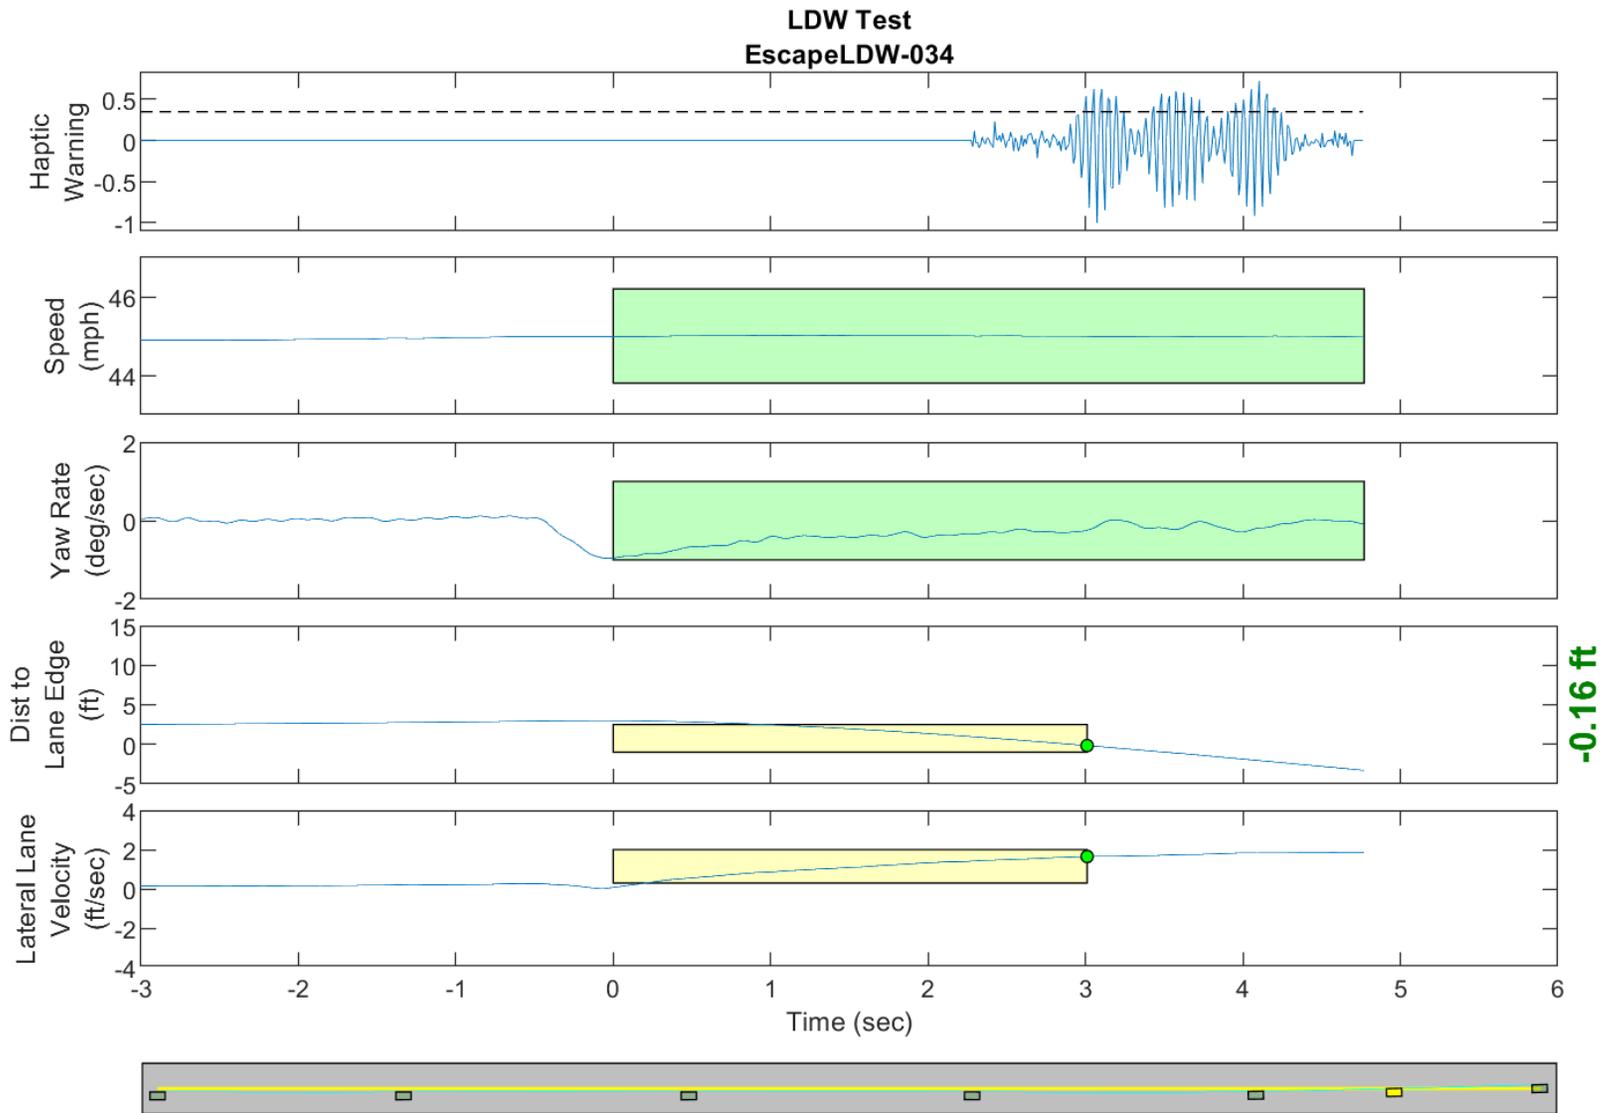


GPS Fix Type: RTK Fixed

Figure D71. Time History for Run 34, Dashed Line, Left Departure, Haptic Warning

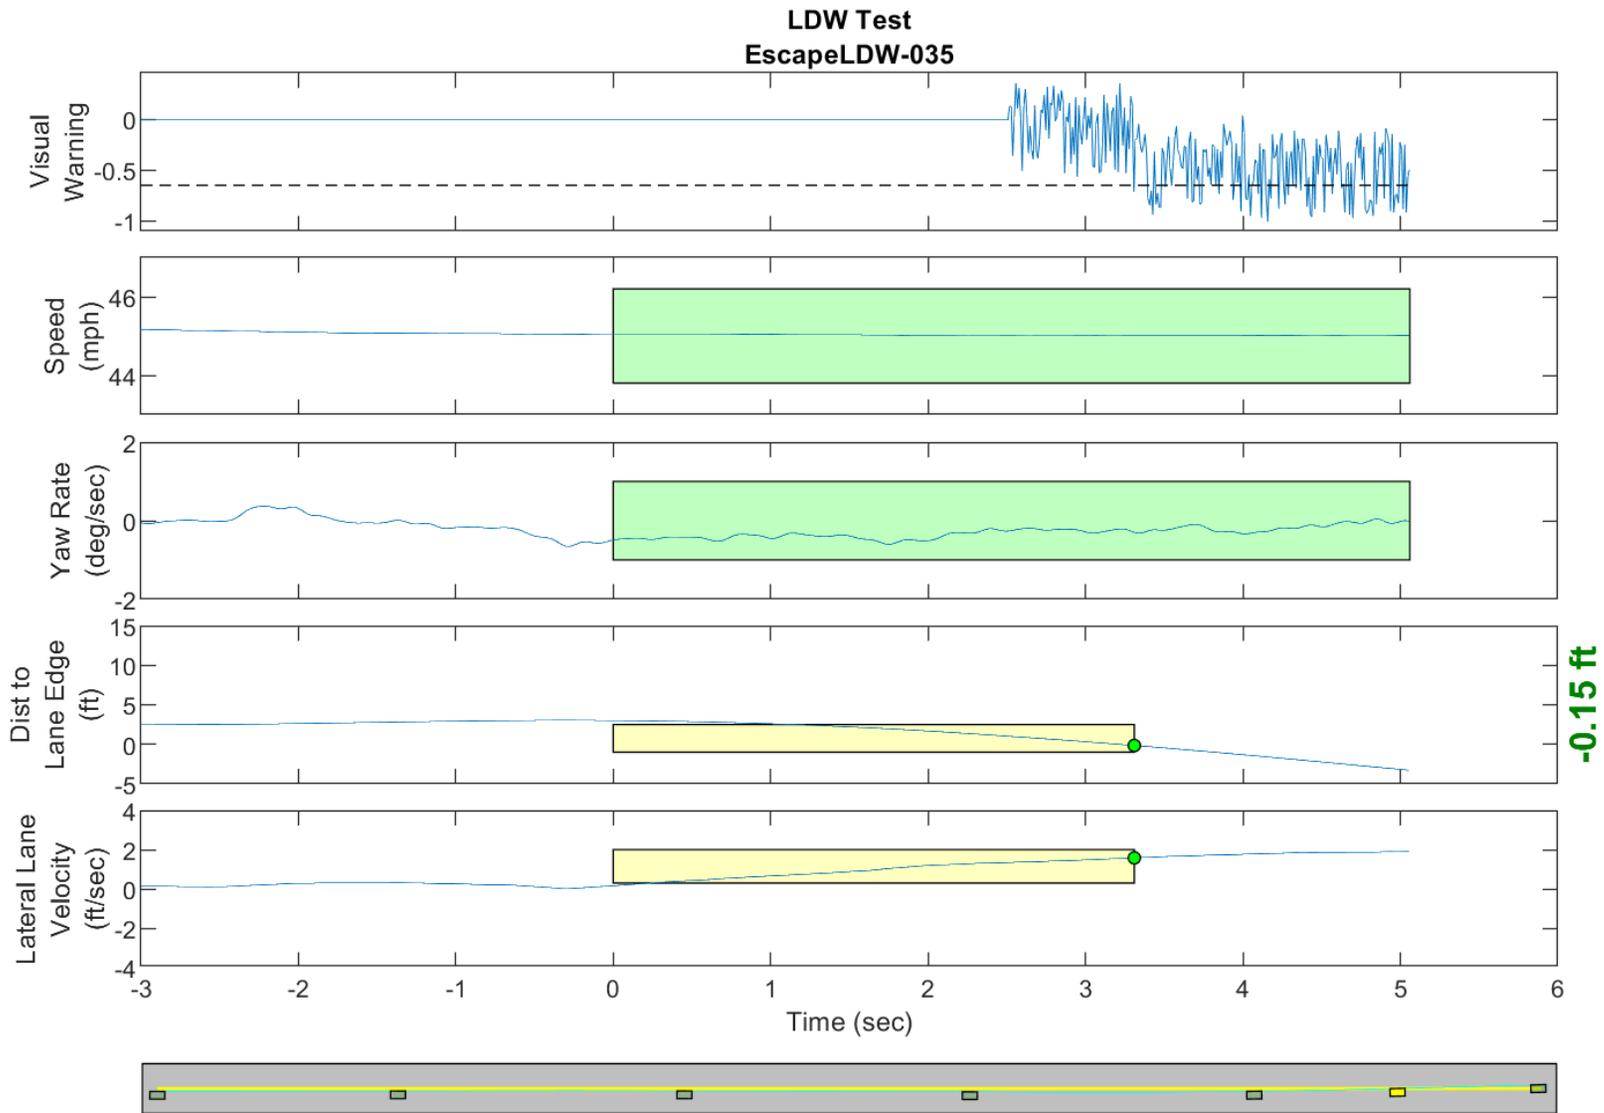


GPS Fix Type: RTK Fixed

Figure D72. Time History for Run 35, Dashed Line, Left Departure, Visual Warning

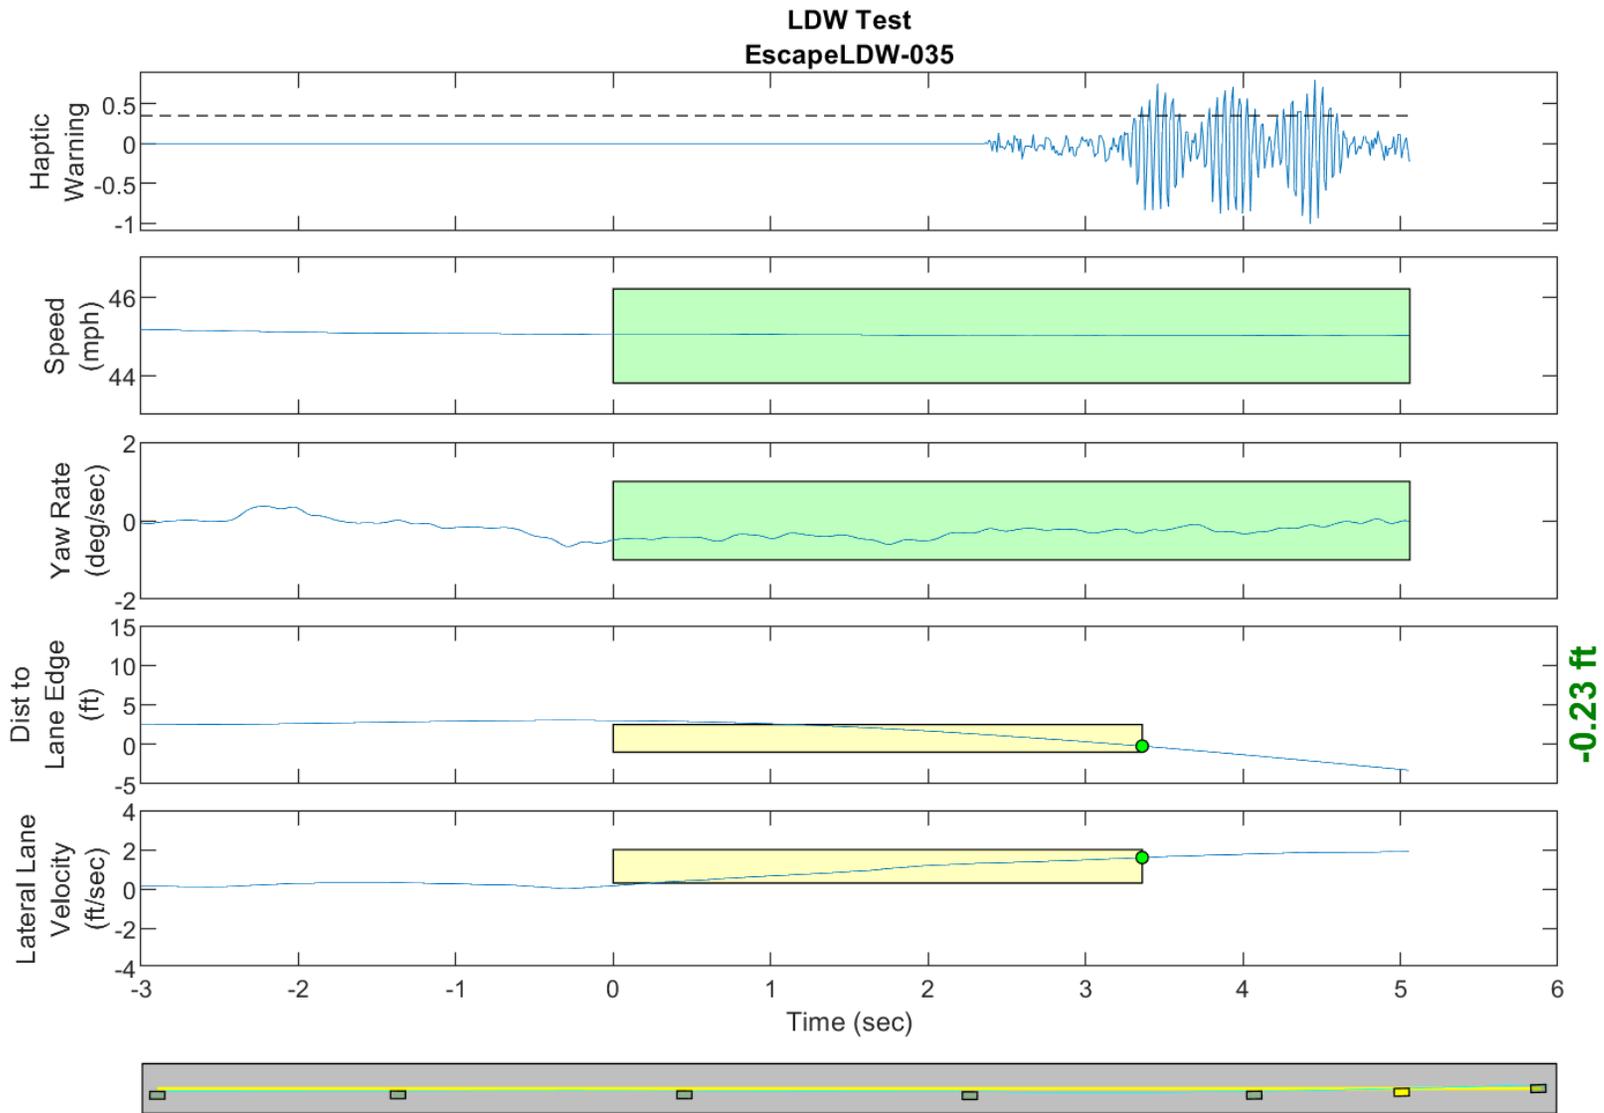


GPS Fix Type: RTK Fixed

Figure D73. Time History for Run 35, Dashed Line, Left Departure, Haptic Warning

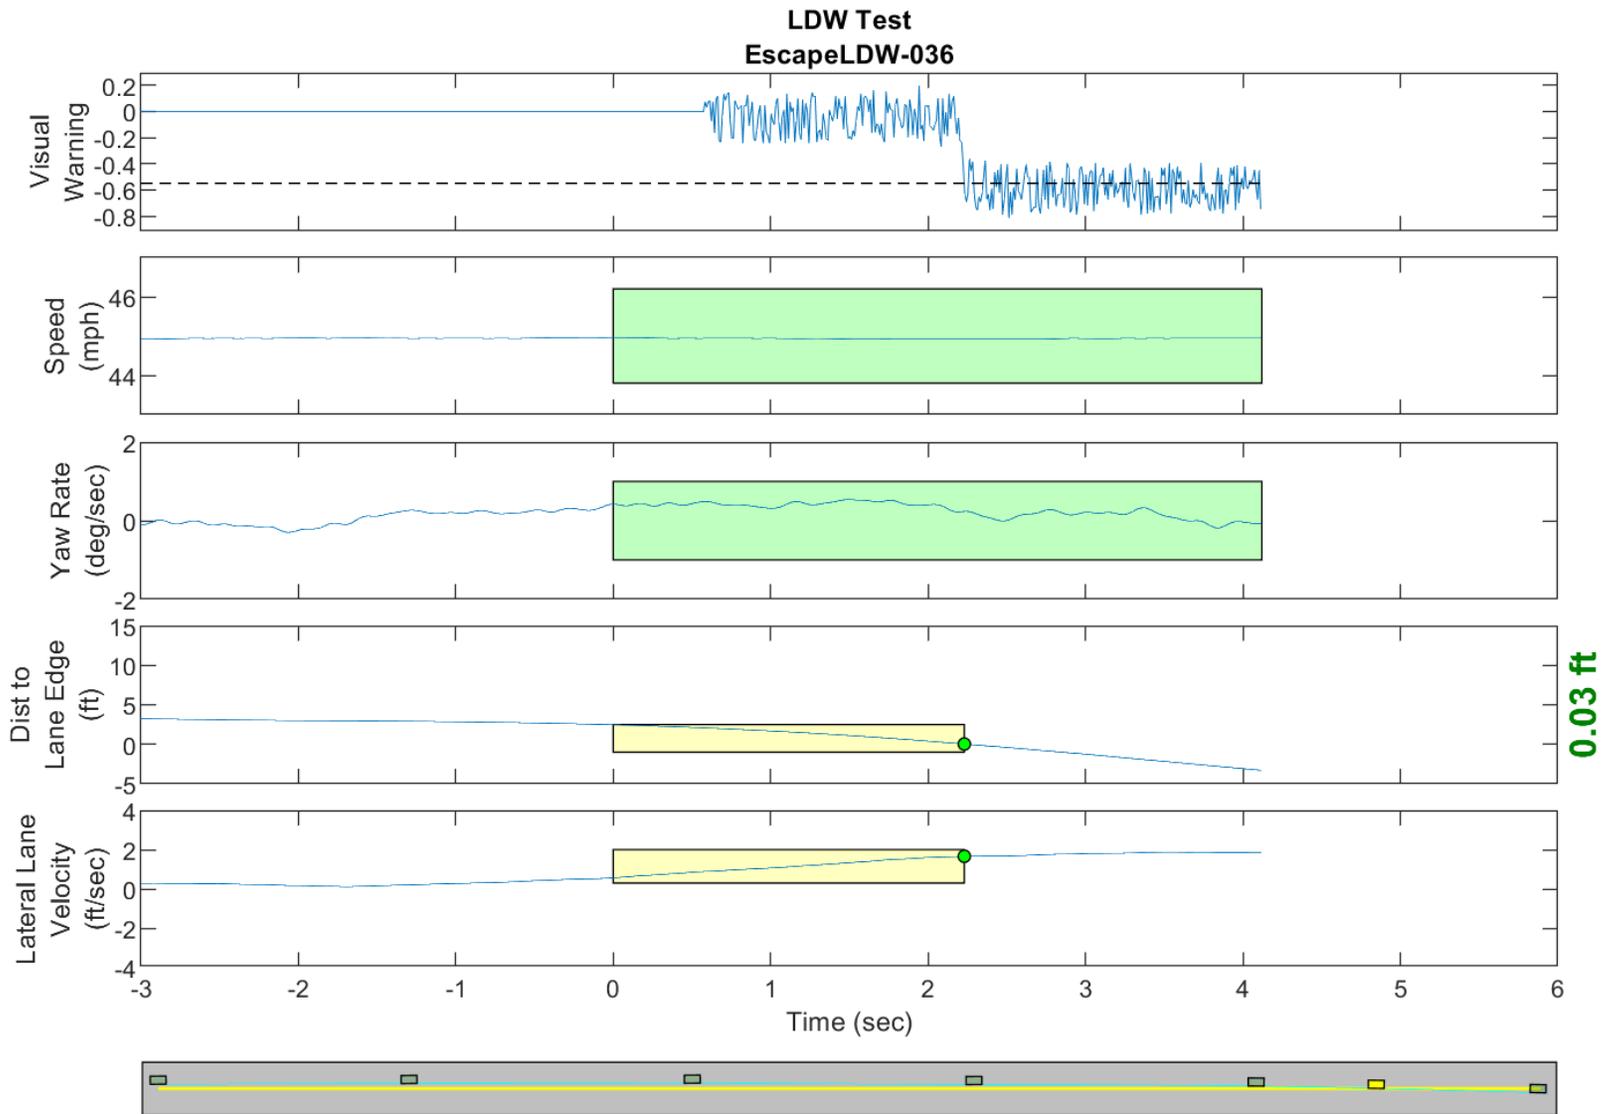


GPS Fix Type: RTK Fixed

Figure D74. Time History for Run 36, Dashed Line, Right Departure, Visual Warning

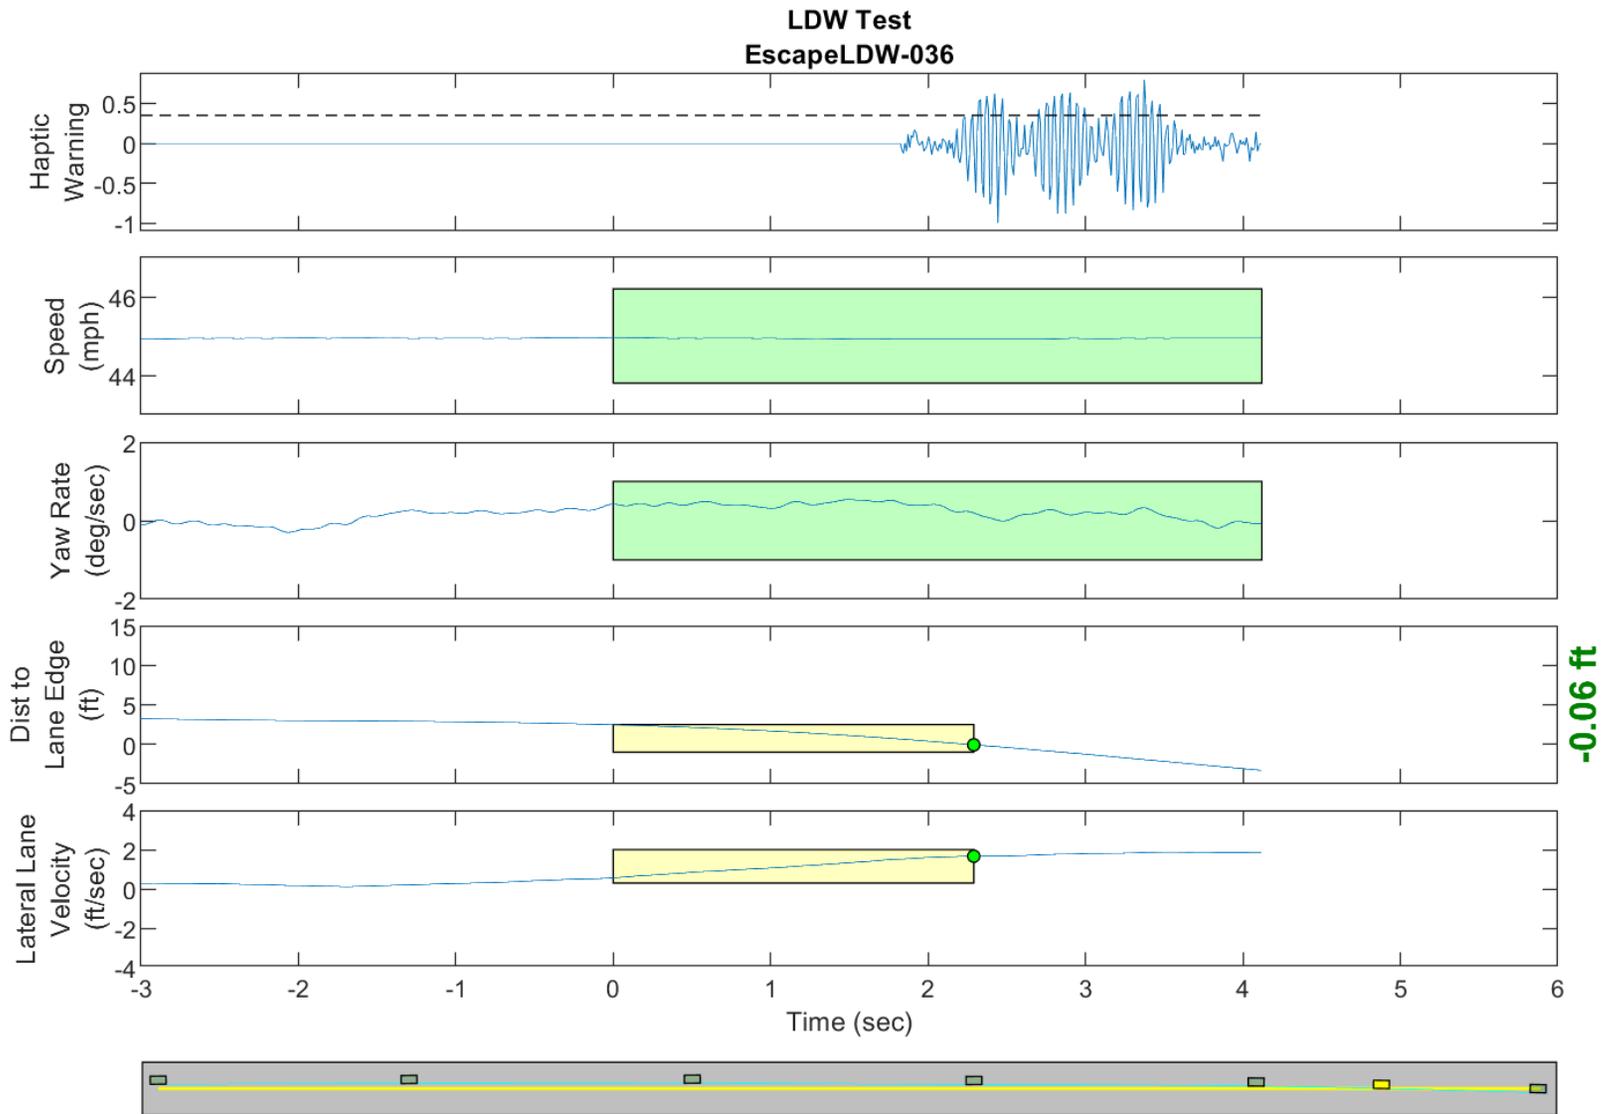


GPS Fix Type: RTK Fixed

Figure D75. Time History for Run 36, Dashed Line, Right Departure, Haptic Warning

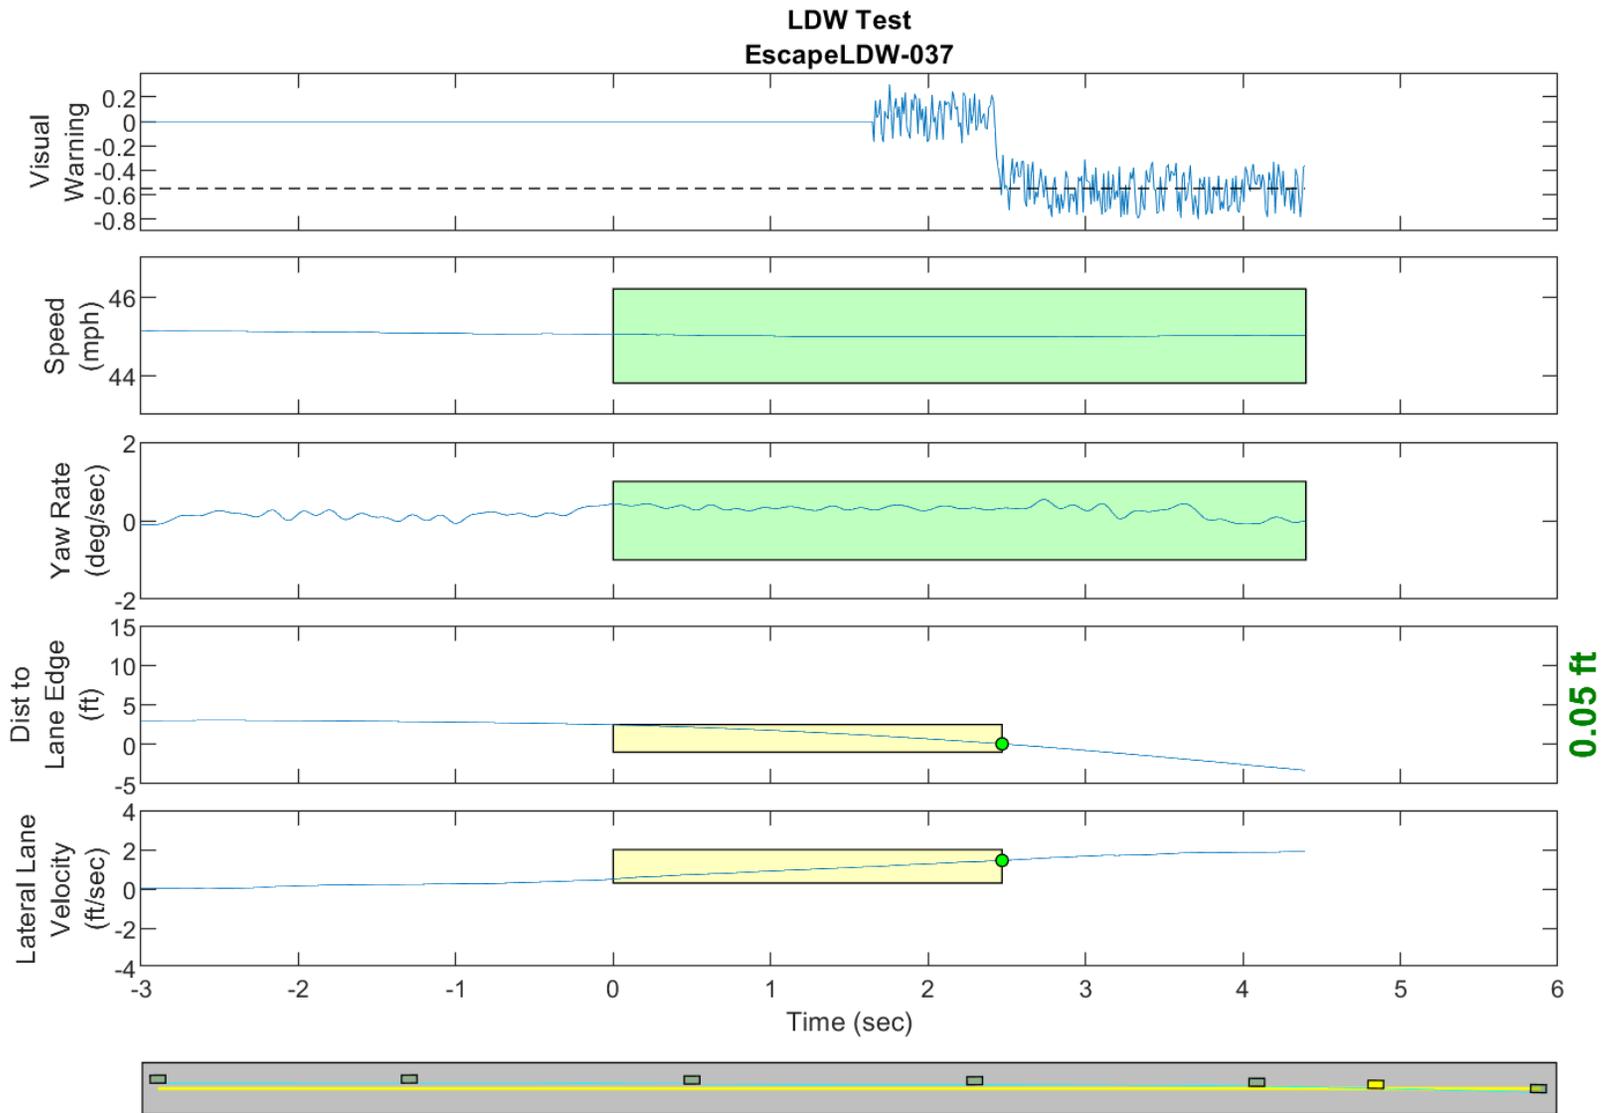


GPS Fix Type: RTK Fixed

Figure D76. Time History for Run 37, Dashed Line, Right Departure, Visual Warning

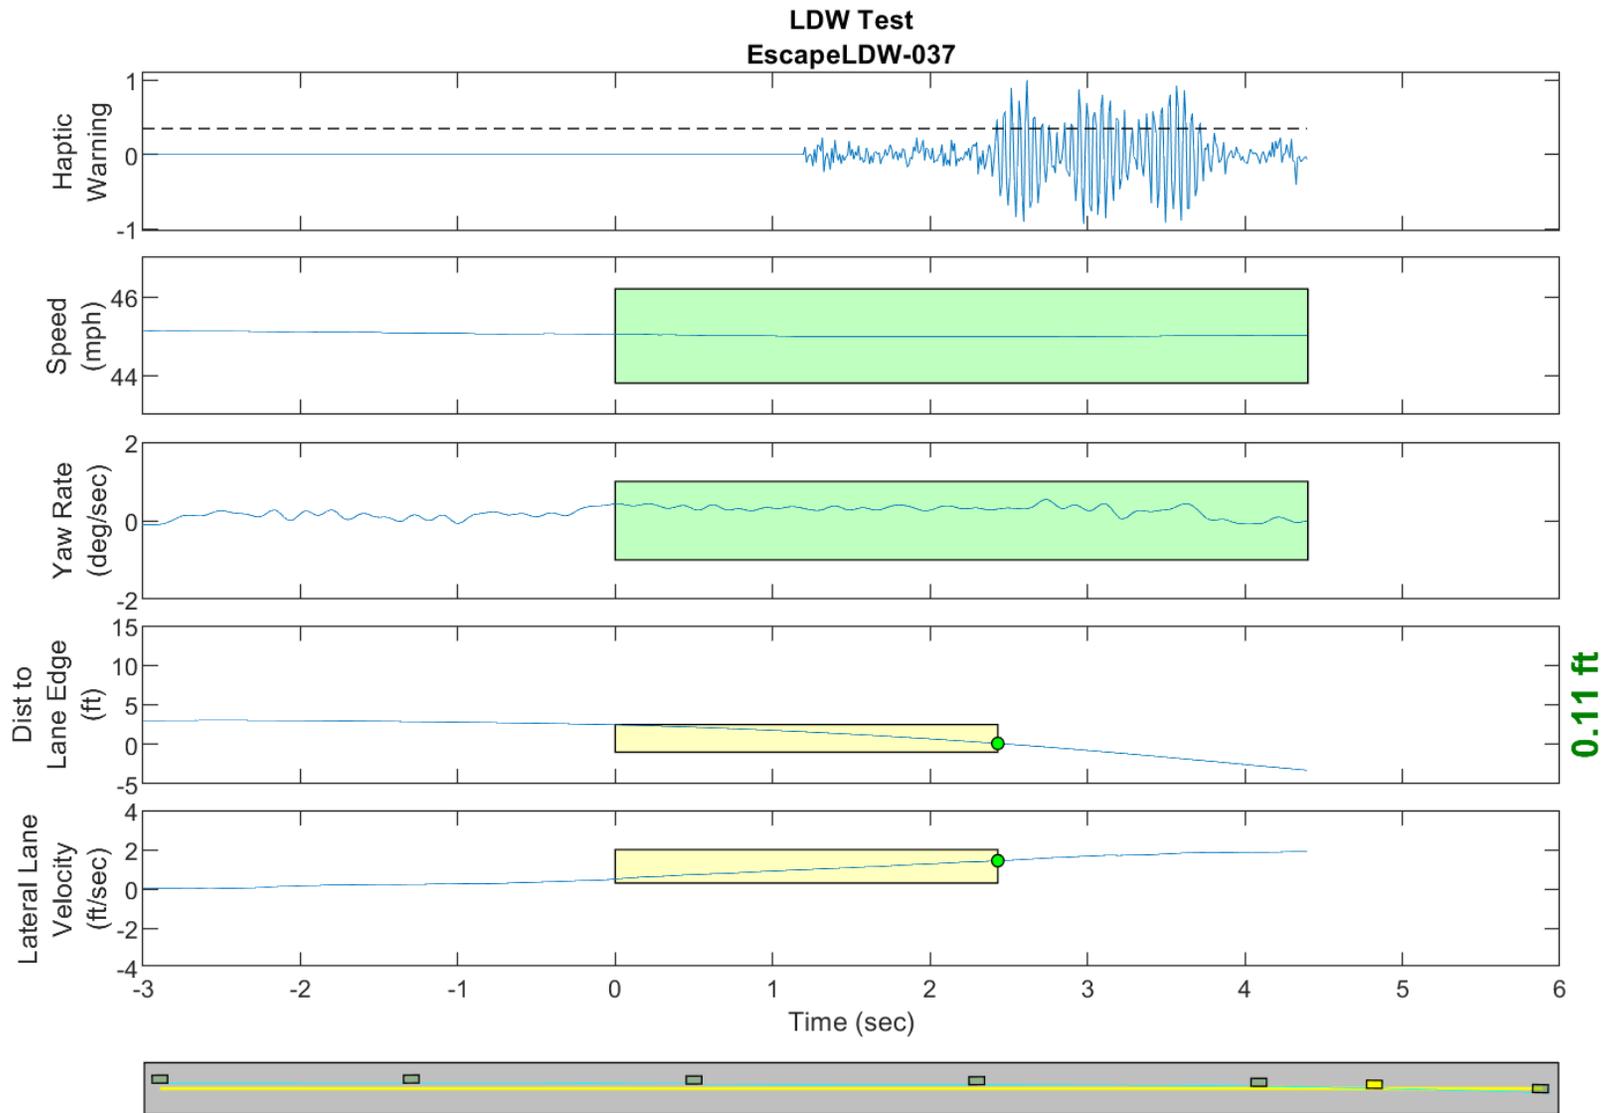


GPS Fix Type: RTK Fixed

Figure D77. Time History for Run 37, Dashed Line, Right Departure, Haptic Warning

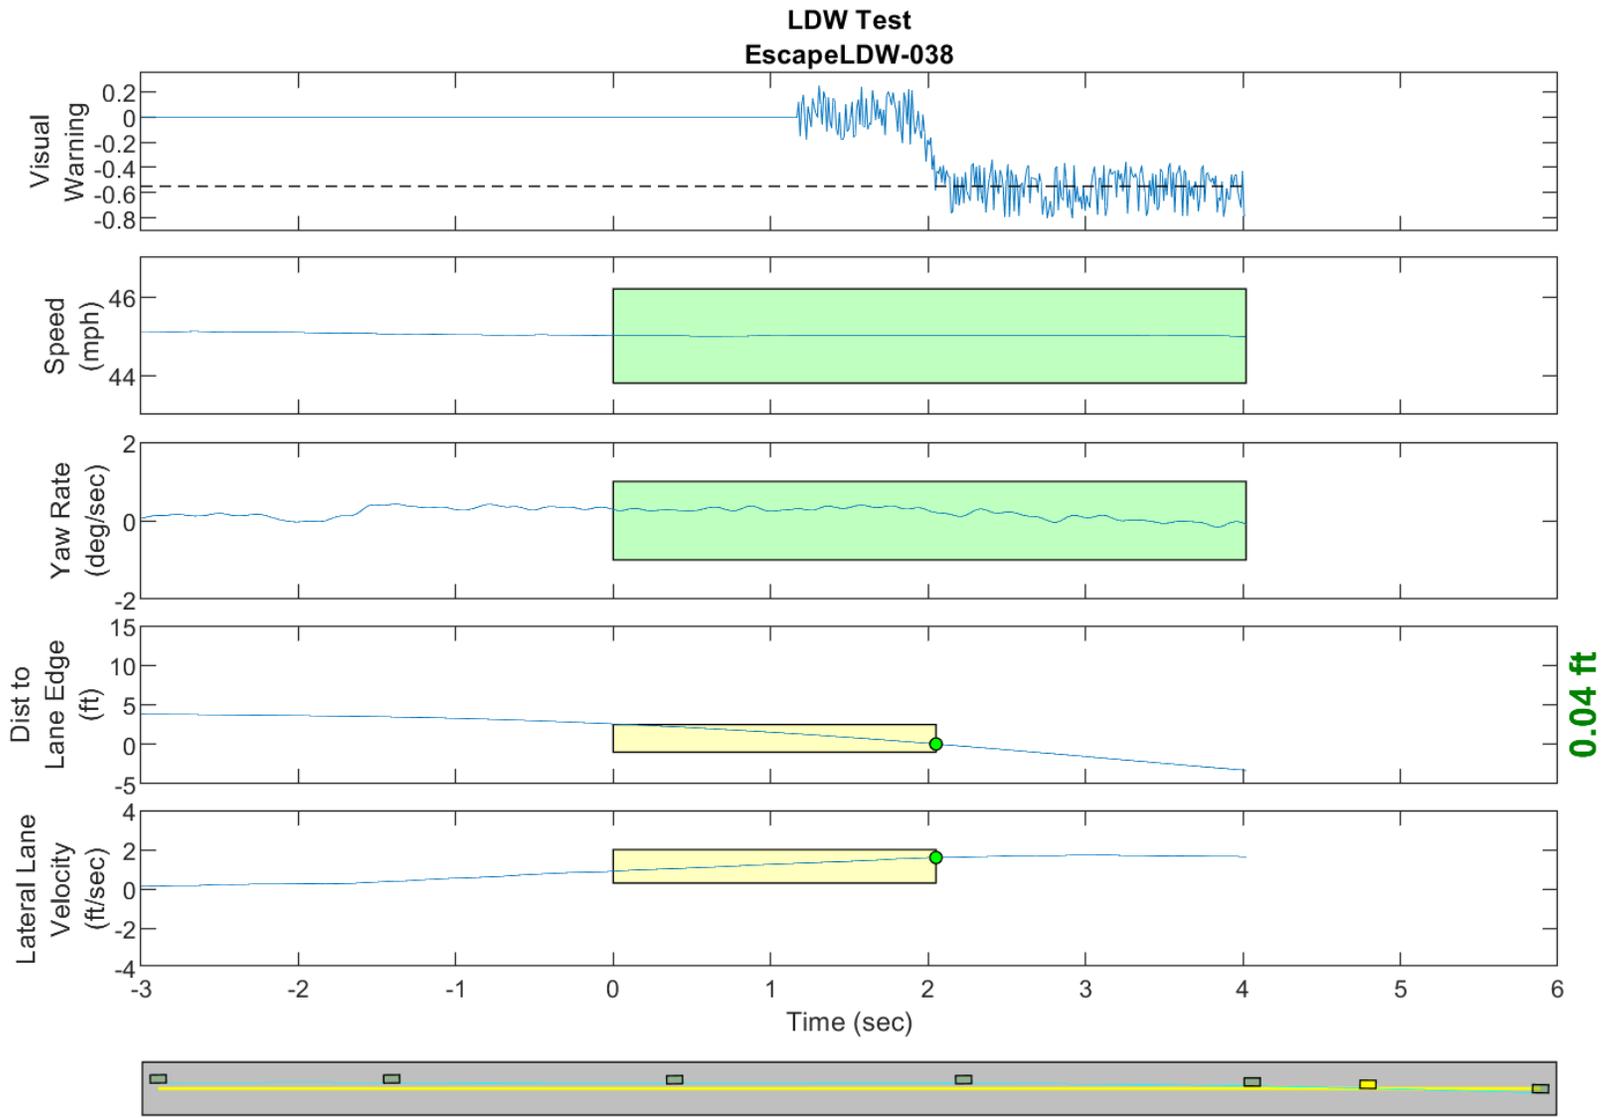


GPS Fix Type: RTK Fixed

Figure D78. Time History for Run 38, Dashed Line, Right Departure, Visual Warning

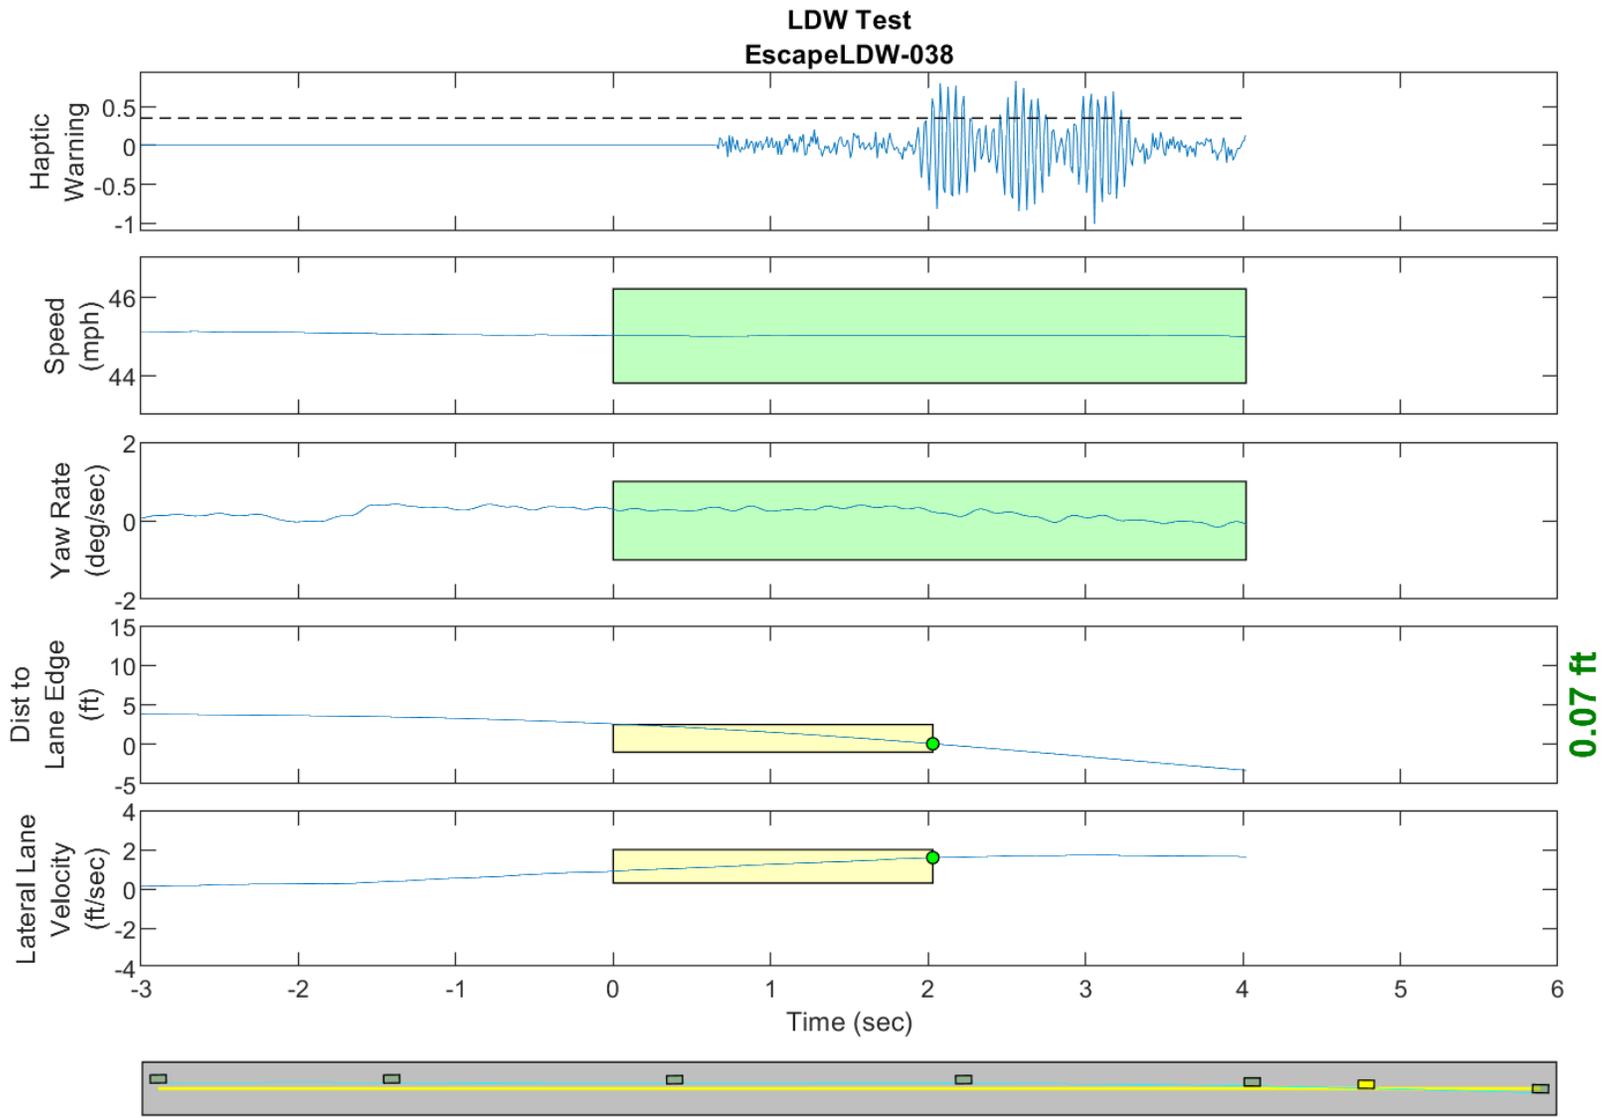


GPS Fix Type: RTK Fixed

Figure D79. Time History for Run 38, Dashed Line, Right Departure, Haptic Warning

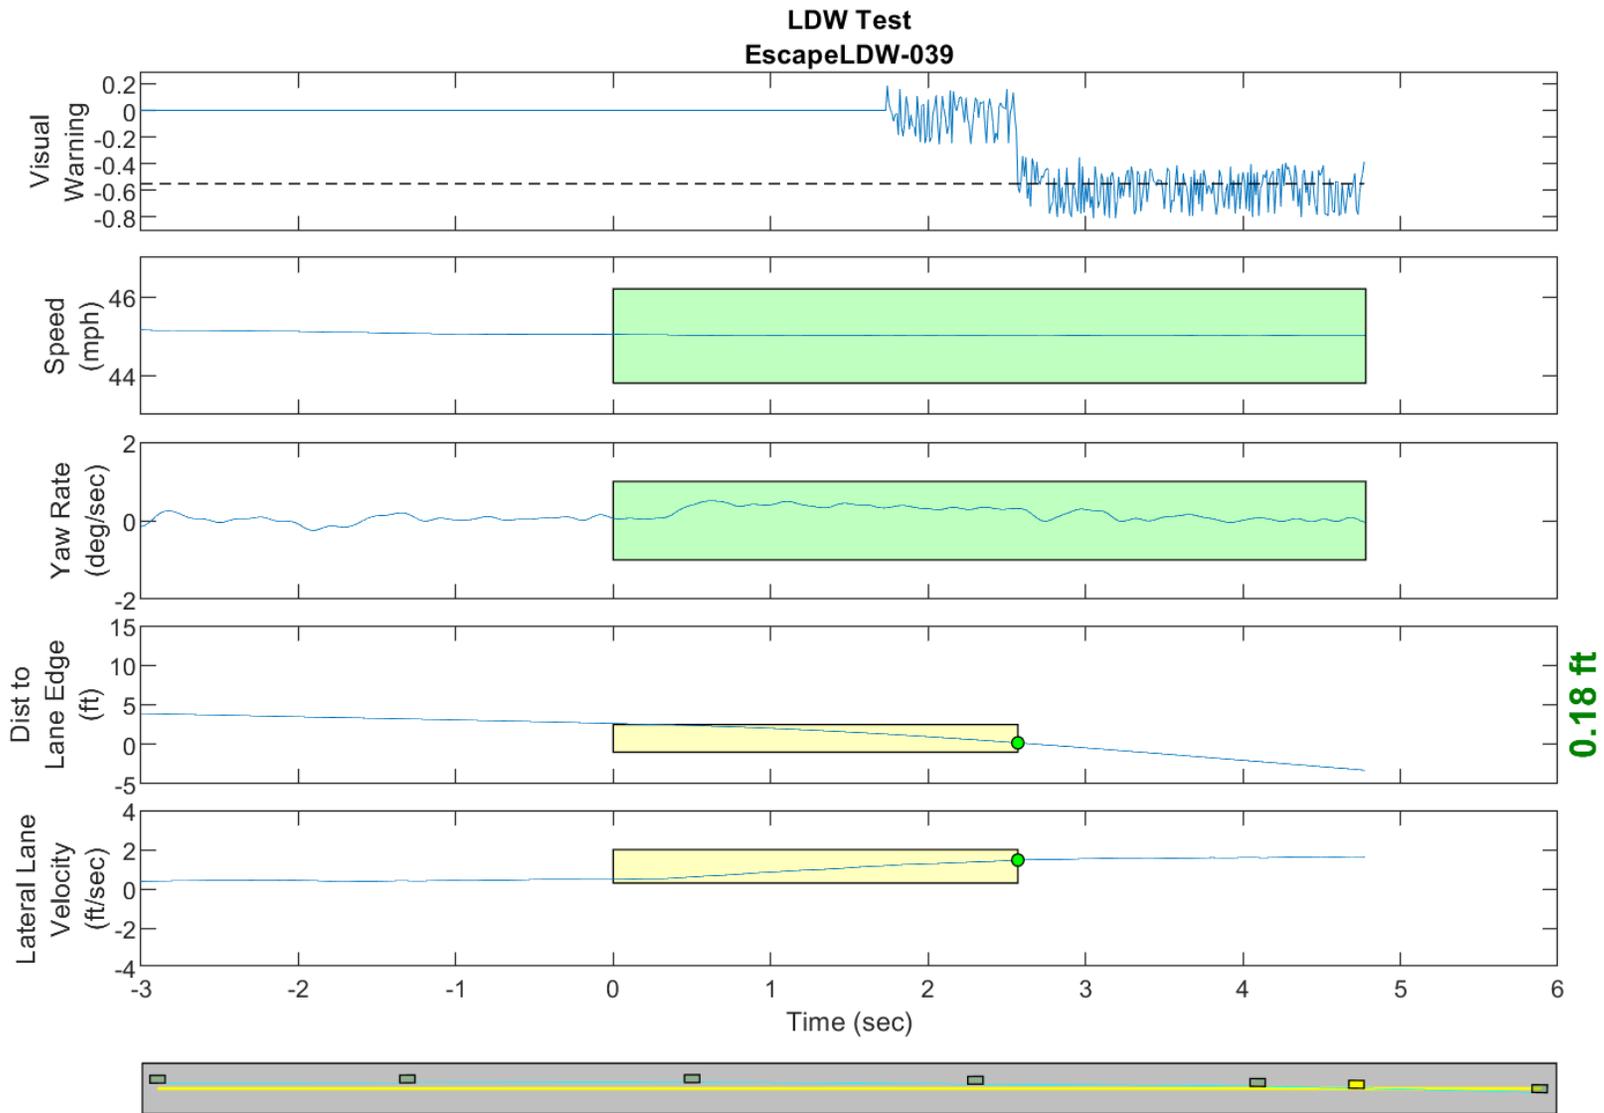


GPS Fix Type: RTK Fixed

Figure D80. Time History for Run 39, Dashed Line, Right Departure, Visual Warning

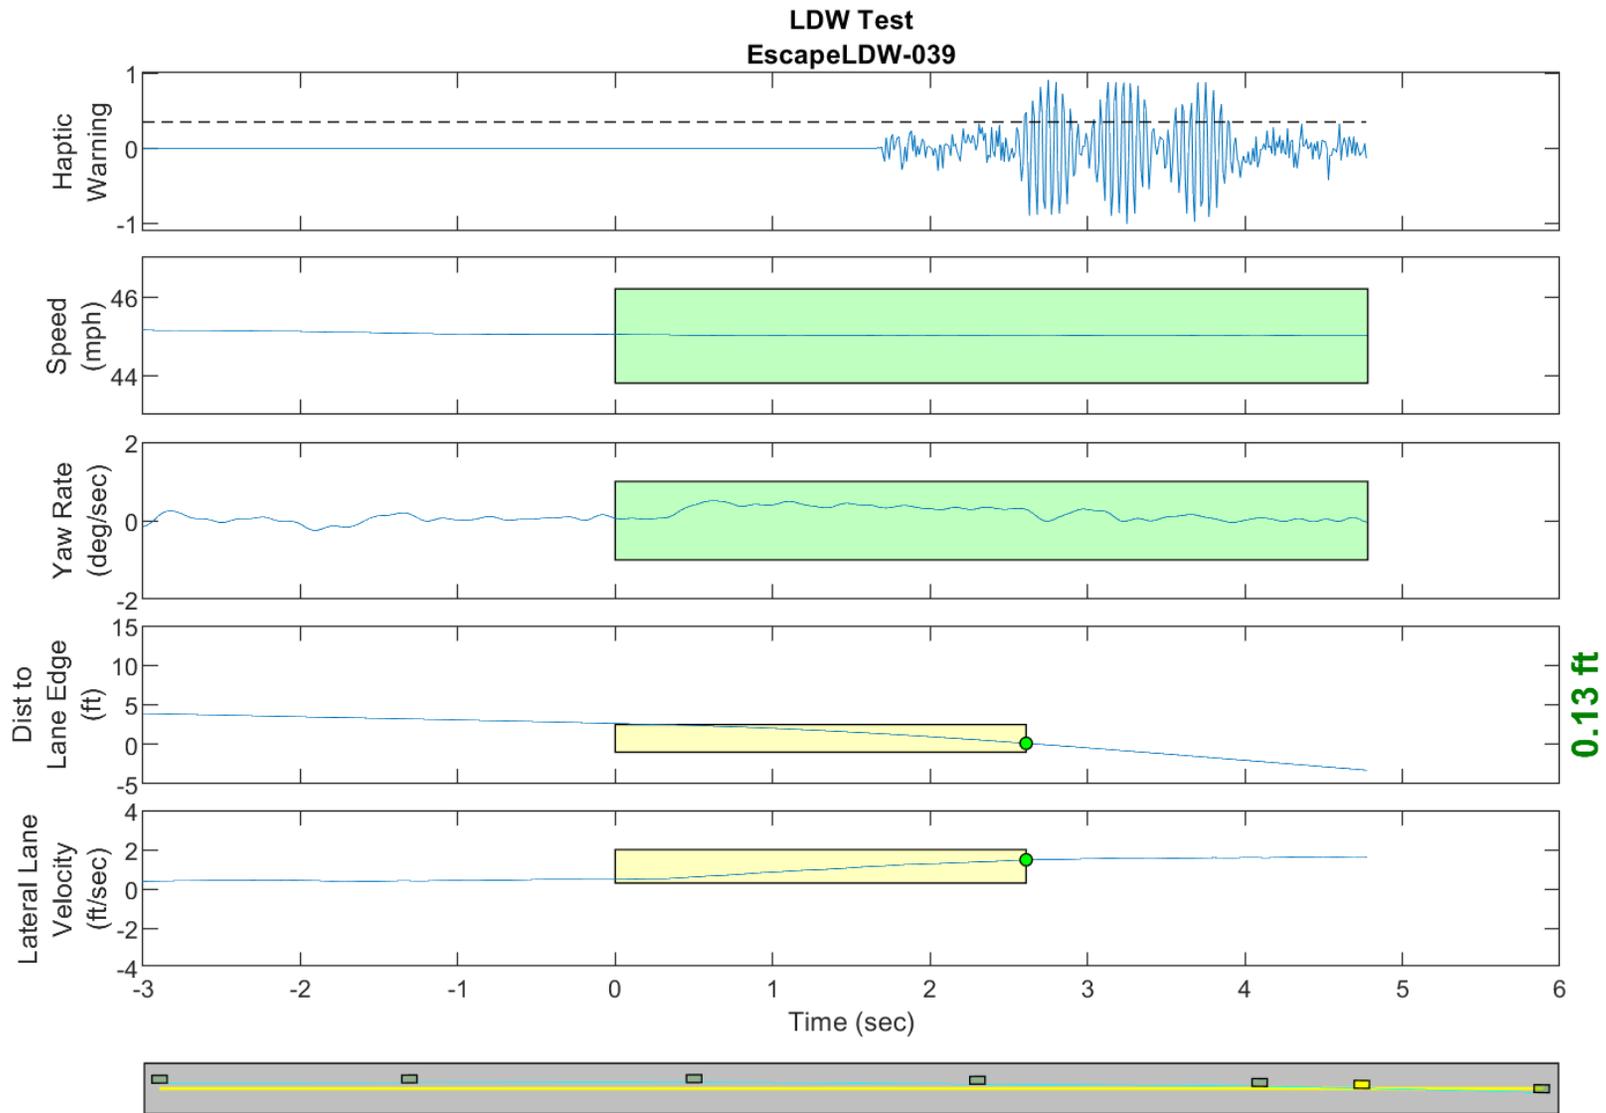


GPS Fix Type: RTK Fixed

Figure D81. Time History for Run 39, Dashed Line, Right Departure, Haptic Warning

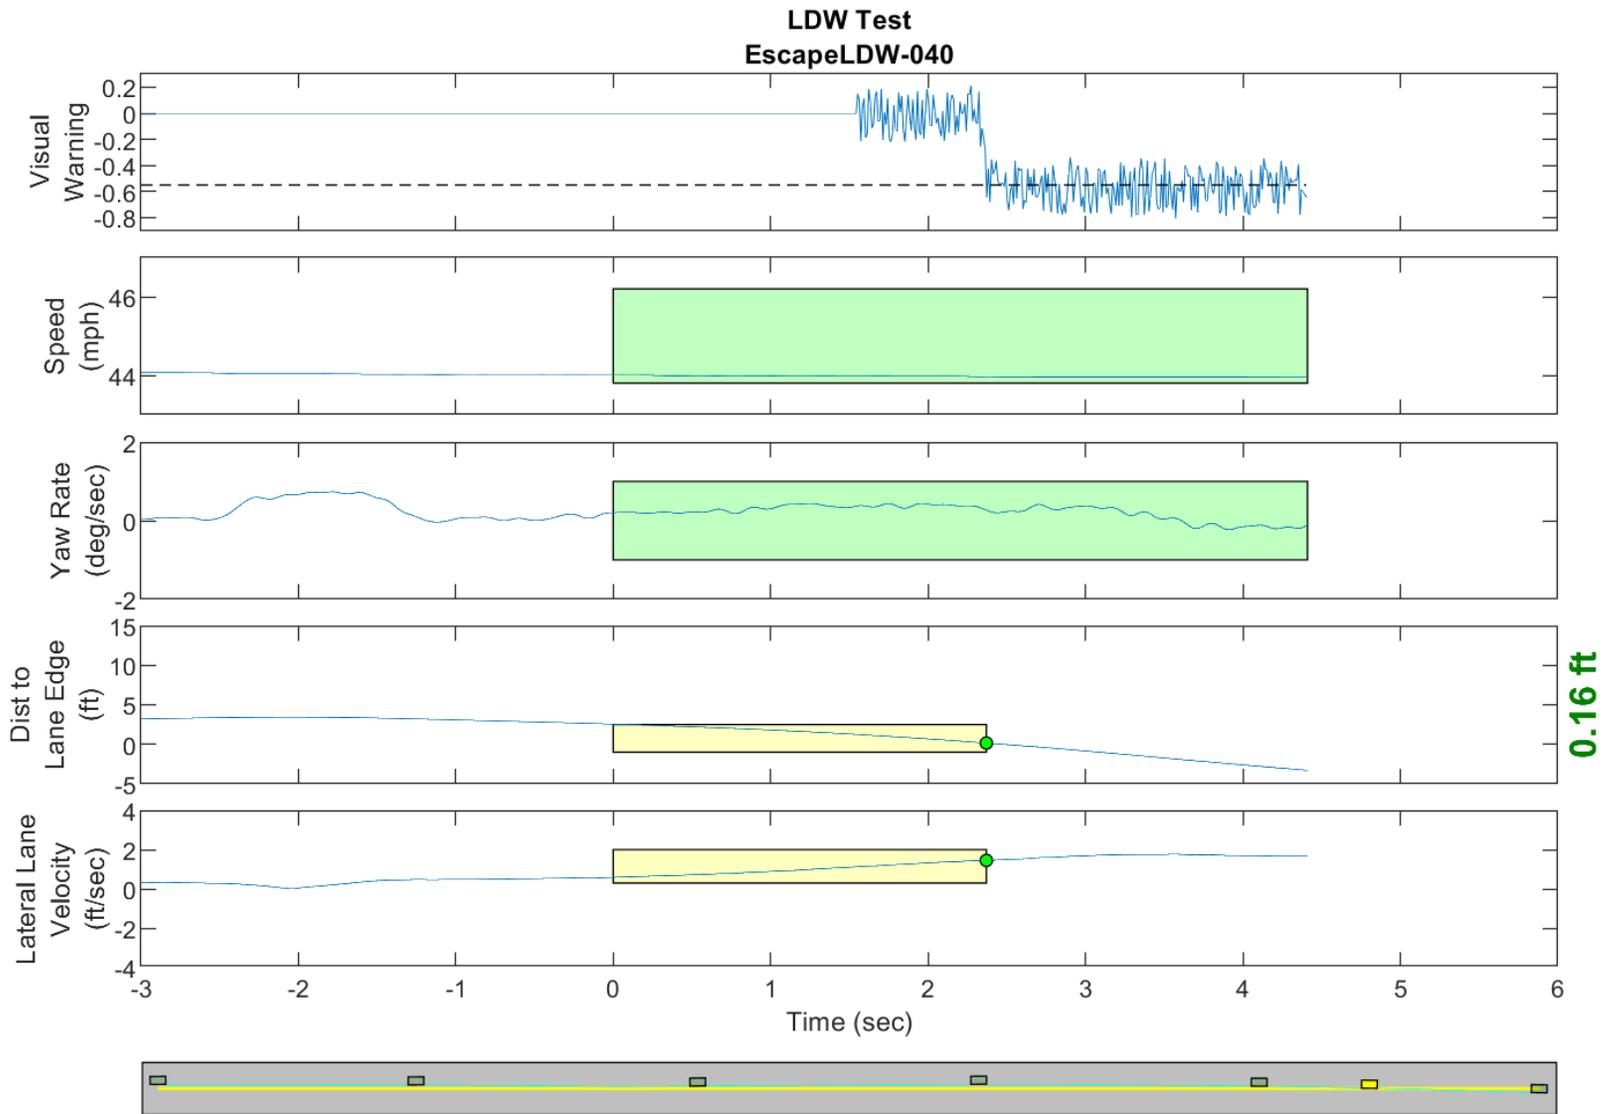


GPS Fix Type: RTK Fixed

Figure D82. Time History for Run 40, Dashed Line, Right Departure, Visual Warning

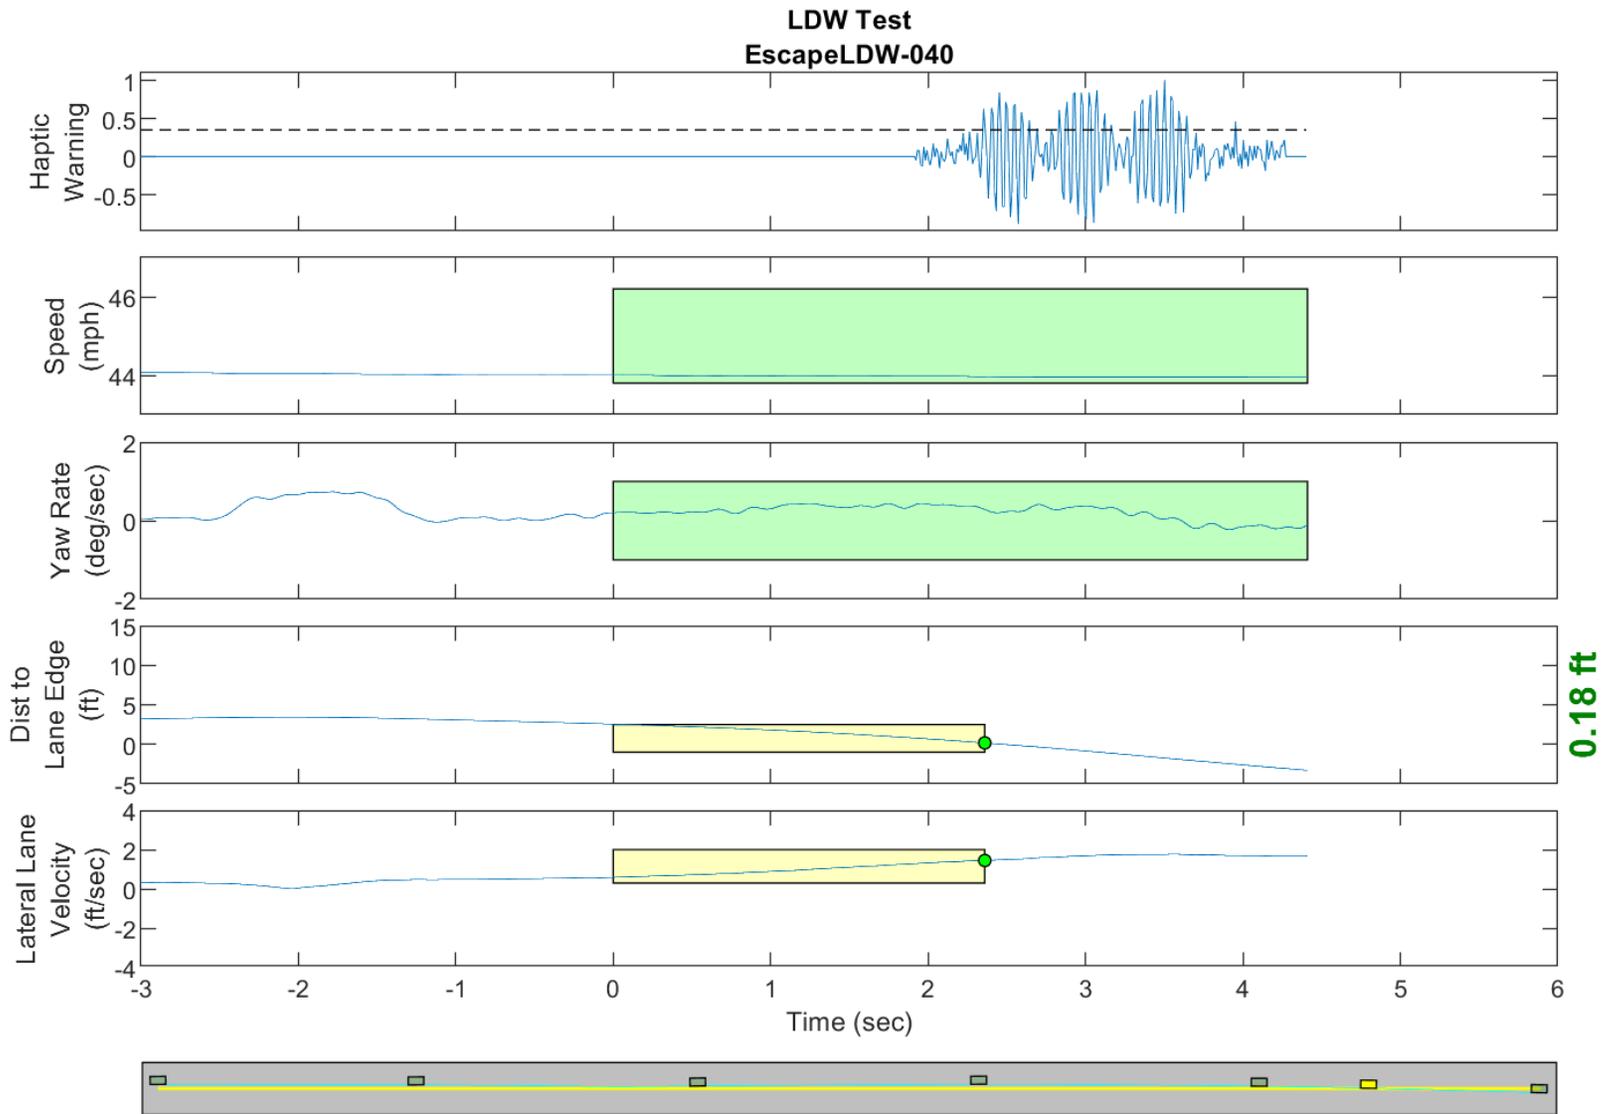


GPS Fix Type: RTK Fixed

Figure D83. Time History for Run 40, Dashed Line, Right Departure, Haptic Warning

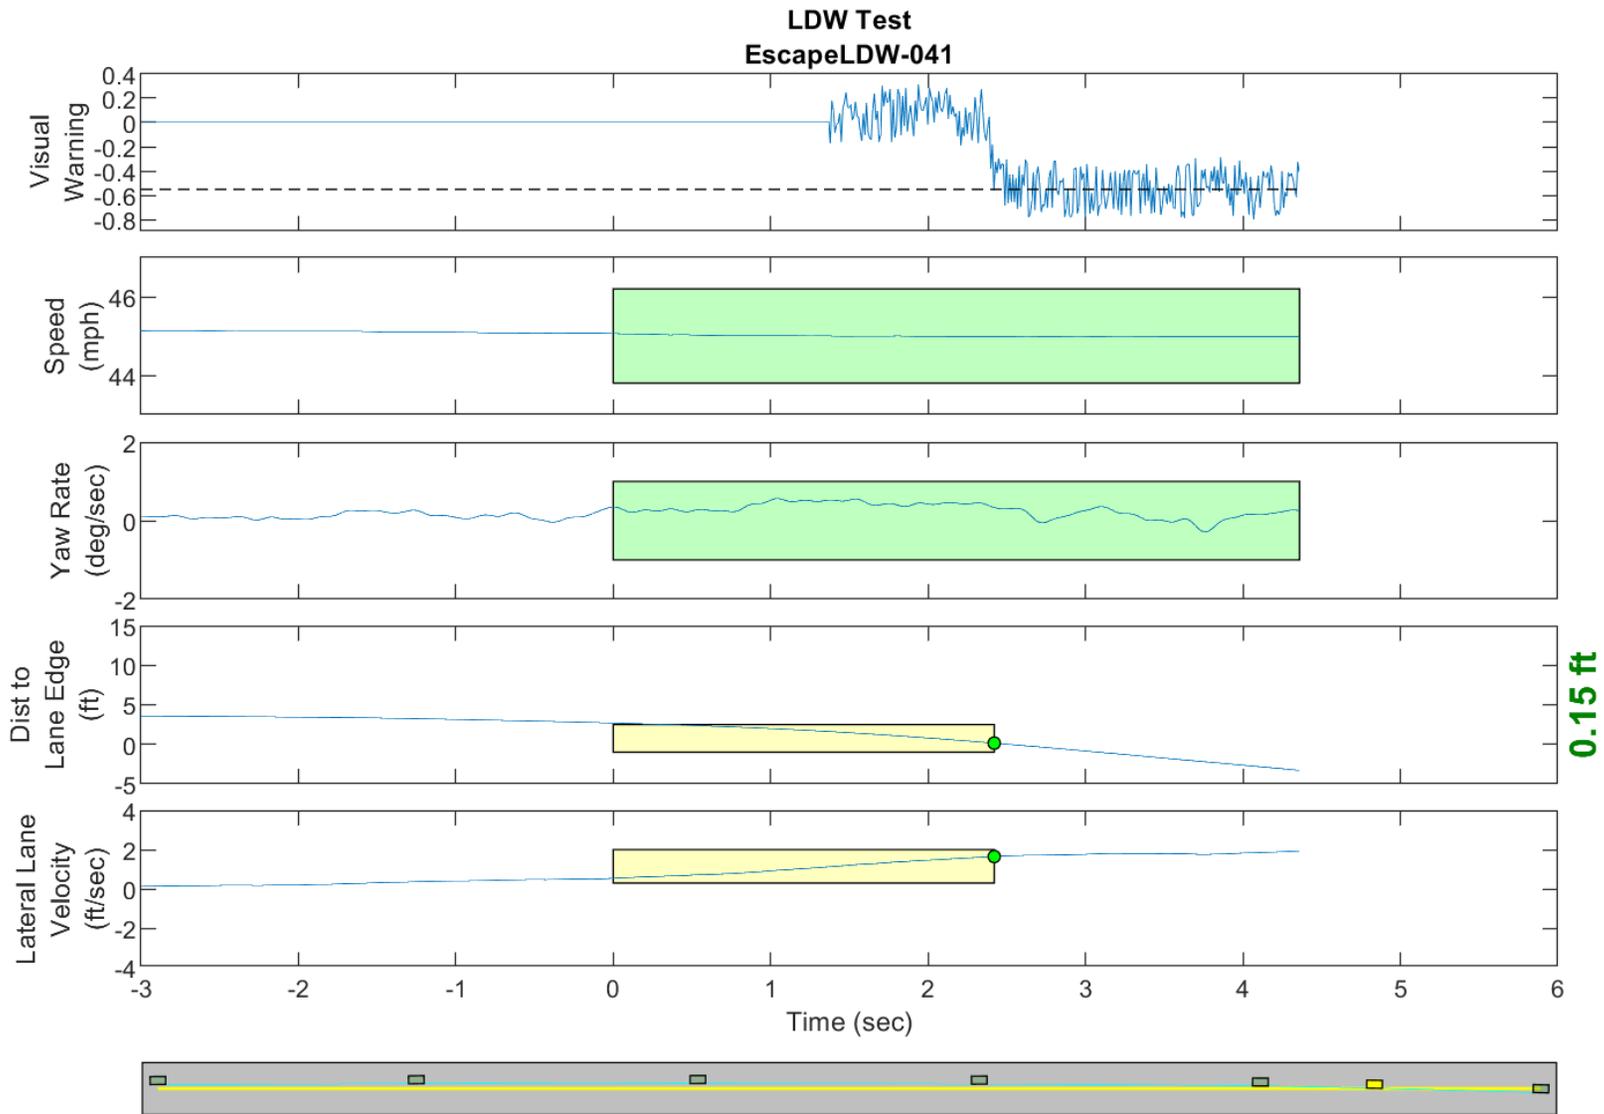


GPS Fix Type: RTK Fixed

Figure D84. Time History for Run 41, Dashed Line, Right Departure, Visual Warning

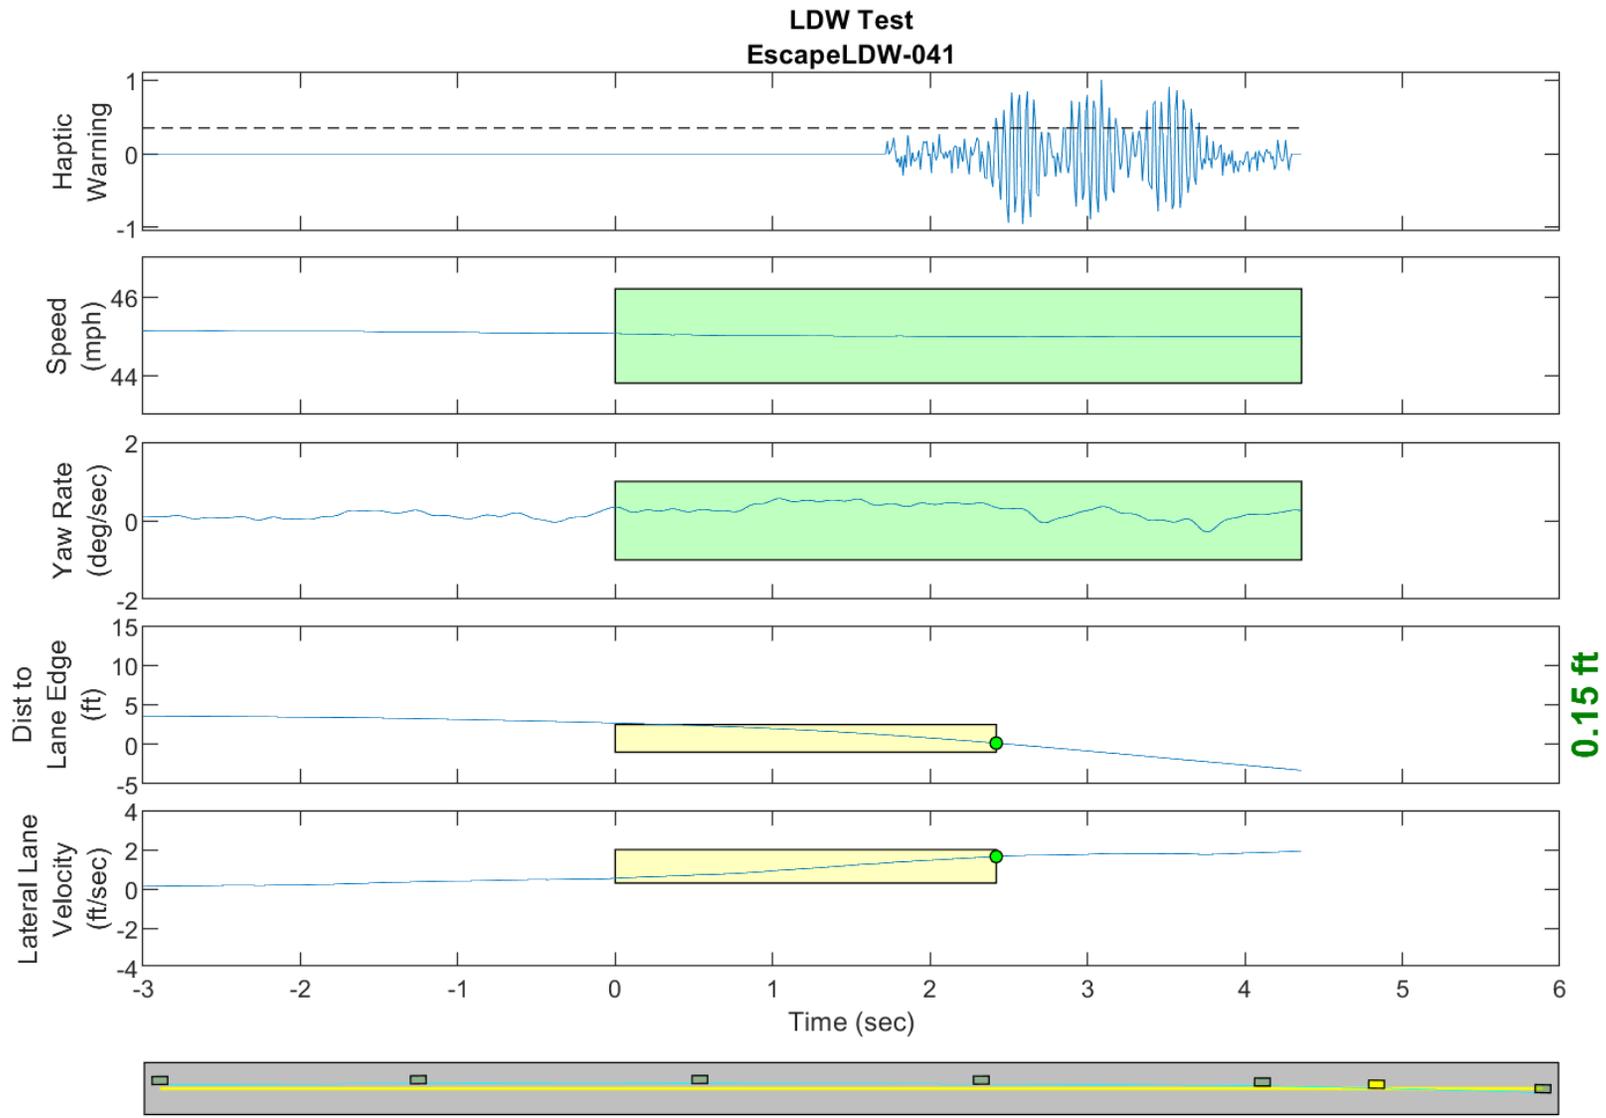


GPS Fix Type: RTK Fixed

Figure D85. Time History for Run 41, Dashed Line, Right Departure, Haptic Warning

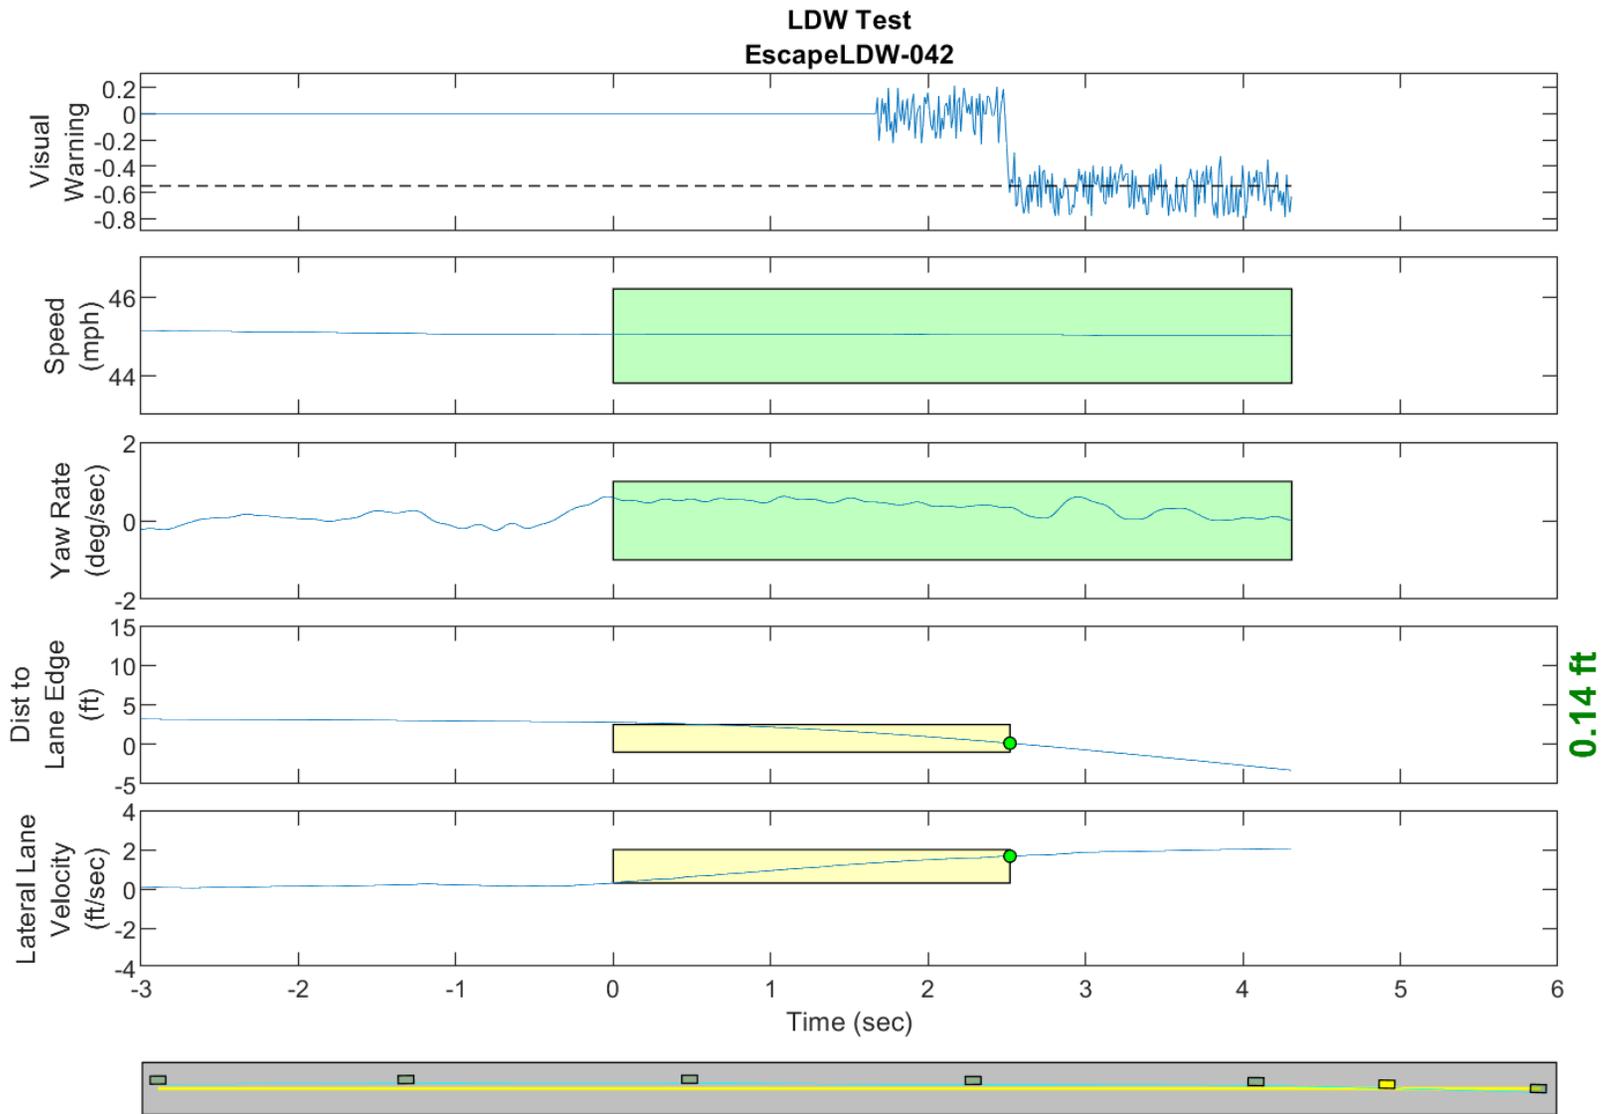

GPS Fix Type: RTK Fixed

Figure D86. Time History for Run 42, Dashed Line, Right Departure, Visual Warning

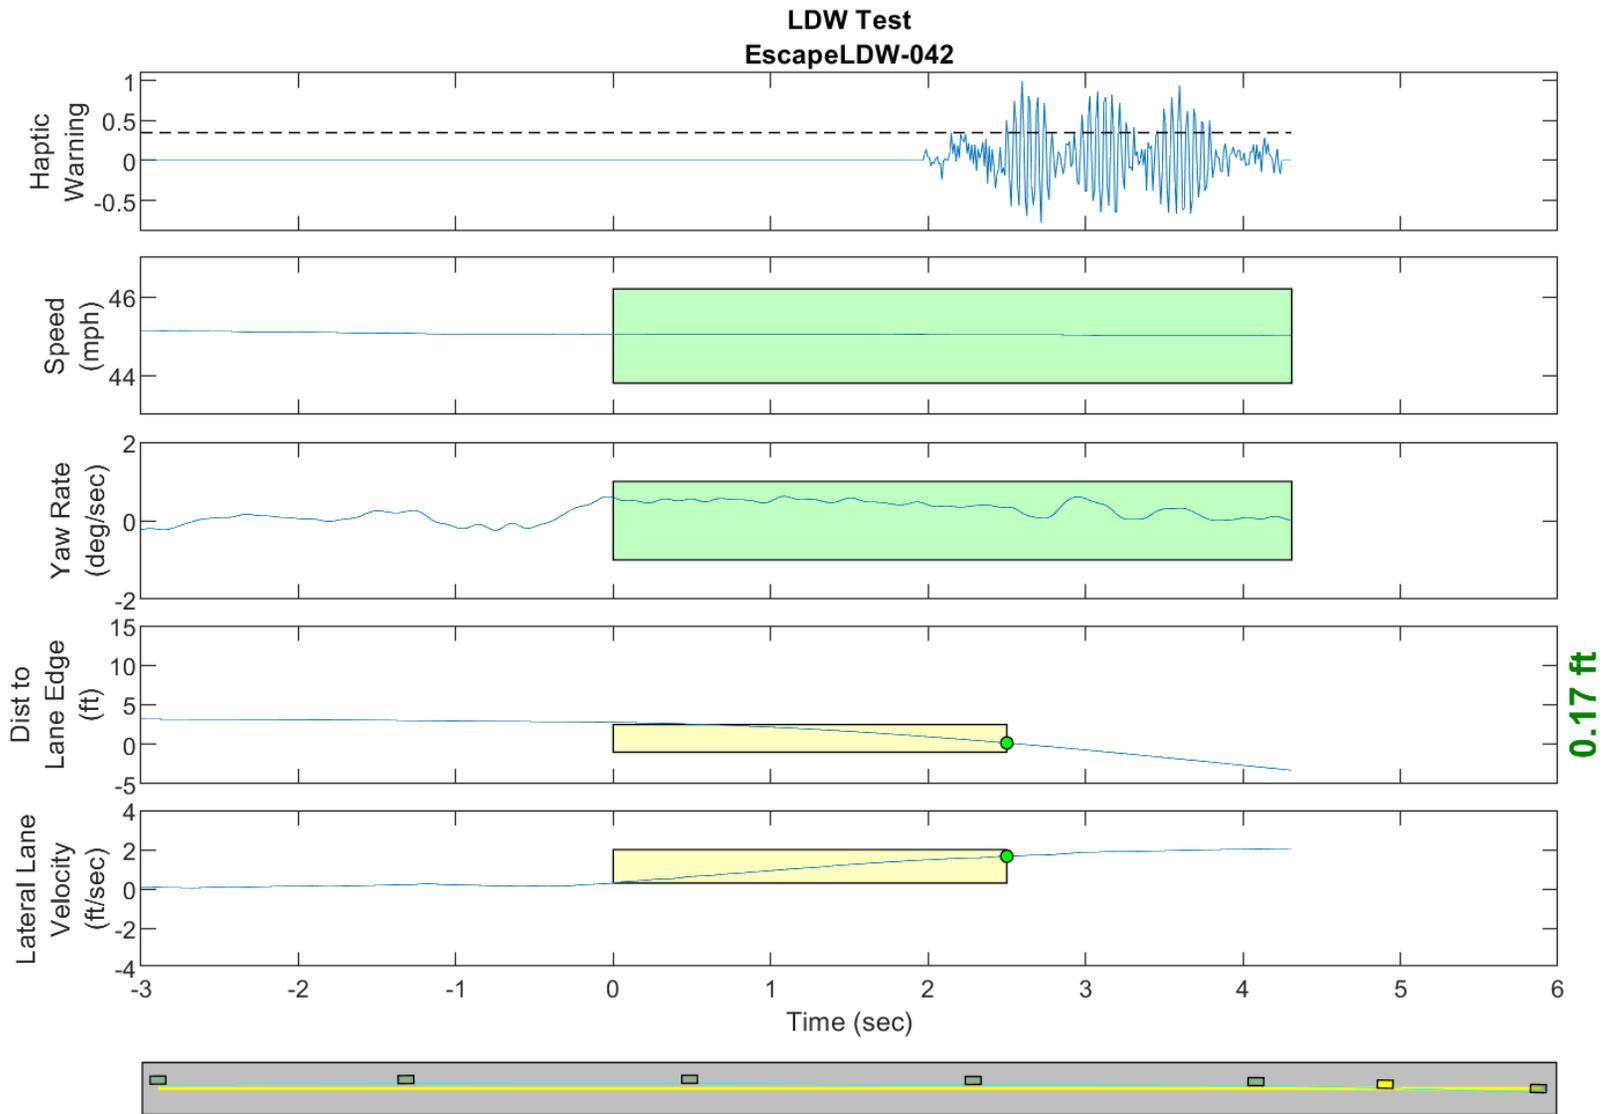

GPS Fix Type: RTK Fixed

Figure D87. Time History for Run 42, Dashed Line, Right Departure, Haptic Warning