

REPORT NUMBER: NCAP-CAL-21-002

**NEW CAR ASSESSMENT PROGRAM (NCAP)
FRONTAL BARRIER IMPACT TEST**

**Toyota Motor Manufacturing Canada Inc.
2021 Lexus RX350
SUV**

NHTSA No: M20215102

**PREPARED BY:
CALSPAN CORPORATION
P.O. BOX 400
BUFFALO, NEW YORK 104625**



February 26, 2021

FINAL REPORT

**PREPARED FOR:
U. S. DEPARTMENT OF TRANSPORTATION
NATIONAL HIGHWAY TRAFFIC SAFETY ADMINISTRATION
OFFICE OF CRASHWORTHINESS STANDARDS
1200 NEW JERSEY AVE SE, ROOM W43-410
WASHINGTON, D.C. 20590**

This final test report was prepared for the U.S. Department of Transportation, National Highway Traffic Administration, in response to Contract Number 693JJ919D000005.

This publication is distributed by the U.S. Department of Transportation, National Highway Traffic Safety Administration, in the interest of information exchange. The opinions, findings and conclusions expressed in this publication are those of the author(s) and not necessarily those of the Department of Transportation or the National Highway Traffic Safety Administration. The United States Government assumes no liability for its contents or use thereof.

If trade or manufacturers' names or products are mentioned it is only because they are considered essential to the object of the publication and should not be construed as an endorsement. The United States Government does not endorse products or manufacturers.

Prepared by: Matthew Pronko
Matthew Pronko, Test Engineer

Date: February 26, 2021

Approved by: Vanessa Hansen
Vanessa Hansen, Operations Manager

Date: February 26, 2021

FINAL REPORT ACCEPTANCE BY OCWS:

Division Chief, New Car Assessment Program
NHTSA, Office of Crashworthiness Standards

Date: _____

COTR, New Car Assessment Program
NHTSA, Office of Crashworthiness Standards

Date: _____

TECHNICAL REPORT DOCUMENTATION PAGE

1. Report No. NCAP-CAL-21-002		2. Government Accession No.		3. Recipient's Catalog No.																																																					
4. Title and Subtitle Final Report of New Car Assessment Program Frontal Impact Testing of a 2021 Lexus RX350 SUV NHTSA No.: M20215102				5. Report Date February 26, 2021																																																					
				6. Performing Organization Code CAL																																																					
7. Author(s) Matthew Pronko, Test Engineer Vanessa Hansen, Operations Manager				8. Performing Organization Report No. CAL-DOT-2021-002																																																					
9. Performing Organization Name and Address Calspan Corporation Transportation Test Operations P.O. Box 400 Buffalo, New York 104625				10. Work Unit No.																																																					
				11. Contract or Grant No. 693JJ919D000005																																																					
12. Sponsoring Agency Name and Address U.S. Department of Transportation National Highway Traffic Safety Administration Office of Crashworthiness Standards 1200 New Jersey Ave., SE, Room W43-410 Washington, D.C. 20590				13. Type of Report and Period Covered: Final Test Report December 10, 2020 - February 26, 2021																																																					
				14. Sponsoring Agency Code NRM-110																																																					
15. Supplementary Notes																																																									
16. Abstract A 56.30 km/h (35 mph), NCAP frontal rigid barrier impact test was conducted on a 2021 Lexus RX350 SUV in accordance with the specifications of the Office of Crashworthiness Standards Laboratory Procedure for NCAP Full Frontal Rigid Barrier Impact Testing. This test was conducted to obtain data related to FMVSS Nos. 208, 212, 219 (partial), 301, and 305 performance. The test was conducted at Calspan Corporation's Transportation Test Operations facility in Buffalo, New York on December 10, 2020. The impact velocity of the vehicle was 56.23 km/h, and the ambient temperature at the barrier face at the time of impact was 21°C. The target vehicle post-test maximum crush was 599 mm at the center of the front bumper. The test vehicle's occupant performance data is as follows:																																																									
<table border="1"> <thead> <tr> <th rowspan="2">Measurement Description</th> <th rowspan="2">Units</th> <th colspan="2">Driver ATD (Serial No. 142)</th> <th colspan="2">Passenger ATD (Serial No. 139)</th> </tr> <tr> <th>Threshold</th> <th>Result</th> <th>Threshold</th> <th>Result</th> </tr> </thead> <tbody> <tr> <td>Head Injury Criteria (HIC₁₅)</td> <td></td> <td>700</td> <td>194.031</td> <td>700</td> <td>304.692</td> </tr> <tr> <td>Maximum Chest Compression</td> <td>mm</td> <td>63</td> <td>-34.490</td> <td>52</td> <td>-18.480</td> </tr> <tr> <td>Nij</td> <td></td> <td>1</td> <td>0.332</td> <td>1</td> <td>0.401</td> </tr> <tr> <td>Neck Tension</td> <td>N</td> <td>4,170</td> <td>1833.354</td> <td>2,620</td> <td>1188.857</td> </tr> <tr> <td>Neck Compression</td> <td>N</td> <td>4,000</td> <td>-265.607</td> <td>2,520</td> <td>-311.596</td> </tr> <tr> <td>Left Femur Force</td> <td>N</td> <td>10,008</td> <td>-1925.514</td> <td>6,805</td> <td>-1793.958</td> </tr> <tr> <td>Right Femur Force</td> <td>N</td> <td>10,008</td> <td>-3196.719</td> <td>6,805</td> <td>-2031.271</td> </tr> </tbody> </table>						Measurement Description	Units	Driver ATD (Serial No. 142)		Passenger ATD (Serial No. 139)		Threshold	Result	Threshold	Result	Head Injury Criteria (HIC ₁₅)		700	194.031	700	304.692	Maximum Chest Compression	mm	63	-34.490	52	-18.480	Nij		1	0.332	1	0.401	Neck Tension	N	4,170	1833.354	2,620	1188.857	Neck Compression	N	4,000	-265.607	2,520	-311.596	Left Femur Force	N	10,008	-1925.514	6,805	-1793.958	Right Femur Force	N	10,008	-3196.719	6,805	-2031.271
Measurement Description	Units	Driver ATD (Serial No. 142)		Passenger ATD (Serial No. 139)																																																					
		Threshold	Result	Threshold	Result																																																				
Head Injury Criteria (HIC ₁₅)		700	194.031	700	304.692																																																				
Maximum Chest Compression	mm	63	-34.490	52	-18.480																																																				
Nij		1	0.332	1	0.401																																																				
Neck Tension	N	4,170	1833.354	2,620	1188.857																																																				
Neck Compression	N	4,000	-265.607	2,520	-311.596																																																				
Left Femur Force	N	10,008	-1925.514	6,805	-1793.958																																																				
Right Femur Force	N	10,008	-3196.719	6,805	-2031.271																																																				
17. Key Words 56.3 km/h (35 mph) Full Frontal Rigid Barrier Impact Test New Car Assessment Program (NCAP)				18. Distribution Statement Copies of this report are available from: National Highway Traffic Safety Administration Technical Information Services Division 1200 New Jersey Ave, SE Washington, DC 20590																																																					
19. Security Class. (of this report) UNCLASSIFIED		20. Security Class. (of this page) UNCLASSIFIED		21. No. of Pages 168	22. Price																																																				

TABLE OF CONTENTS

<u>Section</u>		<u>Page</u>
1	Purpose and Summary of the Test	1-1
2	Occupant and Vehicle Information / Data Sheets	2-1
<u>Data Sheet</u>		<u>Page</u>
1	General Test and Vehicle Parameter Data	2-2
2	Seat Adjustment, Fuel System, and Steering Wheel Data	2-6
3	Dummy Longitudinal Clearance Dimensions	2-8
4	Dummy Lateral Clearance Dimensions	2-9
5	Seat Belt Positioning Data	2-10
6	High-Speed Camera Locations and Data	2-11
7	Vehicle Accelerometer Locations	2-13
8	Photographic Reference Target Locations	2-14
9	Load Cell Locations on Fixed Barrier	2-15
10	Test Vehicle Summary of Results	2-16
11	Post-Test Observations	2-17
12	Vehicle Profile Measurements	2-18
13	Accident Investigation Division Data	2-20
14	Vehicle Intrusion Measurements	2-21
15	Summary of Indicant FMVSS No.212 and FMVSS No.219 (Partial) Data	2-23
16	FMVSS 301 Barrier Impact & Static Rollover Results	2-25
17	Dummy/Vehicle Temperature Stabilization Chart	2-26
<u>Appendix</u>		<u>Page</u>
A	Photographs	A-1
B	Dummy Response Data Traces	B-1
C	Dummy Calibration and Performance Verification Data	C-1
D	Test Equipment and Instrumentation Calibration	D-1

SECTION 1

PURPOSE AND SUMMARY OF TEST

PURPOSE

This 56.3 km/h frontal barrier impact test is part of the Vehicle Barrier Impact Testing Program sponsored by the National Highway Traffic Safety Administration (NHTSA) under Contract No. 693JJ919D000005. The purpose of this test was to obtain vehicle crashworthiness and occupant restraint system performance data for consumer information purposes.

The 56.3 km/h frontal barrier impact test was conducted in accordance with the Office of Crashworthiness Standards Laboratory Procedure for NCAP Full Frontal Rigid Barrier Impact Testing.

SUMMARY

A load cell barrier consisting of 128 load cells was impacted by a 2021 Lexus RX350 SUV at a velocity of 56.23 km/h. The test was performed at Calspan Corporation's Transportation Test Operations facility in Buffalo, New York on December 10, 2020. Pre- and post-test photographs of the vehicle and dummies to document the test can be found in Appendix A. One real-time camera and 16 high-speed cameras were used to document the frontal barrier impact event. Camera locations and other pertinent camera information can be found in Data Sheet 6 of this report.

One Part 572E, 50th percentile male anthropomorphic test device (ATD), was placed in the driver seating position and one Part 572O 5th percentile female ATD was placed in the right-front passenger seating position according to dummy placement instructions specified in the Laboratory Procedure for NCAP Full Frontal Rigid Barrier Impact Testing. Both ATDs were fully instrumented with head, chest and pelvis tri-axial accelerometers, chest displacement potentiometers, upper neck transducers, femur load cells, and lower leg instrumentation. The driver (position 1) ATD (Serial No. 142) and the right-front passenger (position 2) ATD (Serial No. 139) were qualified prior to this test. Certification details, along with instrumentation calibration data, can be found in Appendix C of this report.

The 486 channels of data were recorded on an on-board data acquisition system. Appendix B contains the vehicle, load cell barrier and dummy response data traces.

There was 100 percent windshield retention and no intrusion into the protected zone of the windshield during the event. There was a total of 0.0 grams of stoddard solvent leakage after the event or during any phase of the static rollover. The maximum static crush of the vehicle was 599 mm and both driver and passenger side doors remained closed during the impact event and were operable after the impact.

The driver's visible contact points were as follows: The driver's head contacted the frontal airbag and then the head restraint. The upper torso contacted the frontal airbag. Both knees contacted the knee air bag.

The passenger's visible contact points were as follows: The passenger's head contacted the frontal airbag and then the head restraint. The upper torso contacted the frontal airbag. Both knees contacted the glove box.

The occupant data is summarized below.

ATD Position	HIC ₁₅	Nij	Neck Tension (N)	Neck Comp. (N)	3ms Chest Clip (Gs)	Chest Disp. (mm)	Left Femur (N)	Right Femur (N)
Driver (50 th)	194.031	0.332	1833.354	-265.607	49.652	-34.490	-1925.514	-3196.719
Passenger (5 th)	304.692	0.401	1188.857	-311.596	46.317	-18.480	-1793.958	-2031.271

GENERAL COMMENTS:

1. P1 (Driver) serial number - 142
2. P2 (Passenger) serial number - 139

Data Anomalies:

- Driver shoulder belt upper force not used
- Front right passenger shoulder belt upper force not used
- Barrier C=03 FX – Questionable data
- Engine Top X Acceleration, Exceeded calibration range and saturated at 52 ms 70.8 ms

SECTION 2

OCCUPANT AND VEHICLE INFORMATION / DATA SHEETS

This section contains information reporting for the following Data Sheets:

Data Sheet No. 1 – General Test and Vehicle Parameter Data

Data Sheet No. 2 – Seat Adjustment, Fuel System, and Steering Wheel Data

Data Sheet No. 3 – Dummy Longitudinal Clearance Dimensions

Data Sheet No. 4 – Dummy Lateral Clearance Dimensions

Data Sheet No. 5 – Seat Belt Positioning Data

Data Sheet No. 6 – High-Speed Camera Locations and Data

Data Sheet No. 7 – Vehicle Accelerometer Locations

Data Sheet No. 8 – Photographic Reference Target Locations

Data Sheet No. 9 – Load Cell Locations on Fixed Barrier

Data Sheet No. 10 – Test Vehicle Summary of Results

Data Sheet No. 11 – Post-Test Observations

Data Sheet No. 12 – Vehicle Profile Measurements

Data Sheet No. 13 – Accident Investigation Division Data

Data Sheet No. 14 – Vehicle Intrusion Measurements

Data Sheet No. 15 – Summary of Indicant FMVSS No. 212 and FMVSS No. 219 (Partial)

Data Sheet No. 16 – FMVSS 301 Barrier Impact and Static Rollover Results

Data Sheet No. 17 – Dummy/Vehicle Temperature Stabilization Chart

**DATA SHEET NO. 1
GENERAL TEST AND VEHICLE PARAMETER DATA**

Test Vehicle: 2021 Lexus RX350 SUV
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20215102
 Test Date: 12/10/2020

TEST VEHICLE INFORMATION AND OPTIONS

NHTSA No.	M20215102	Traction Control System (TCS)	Yes
Model Year	2021	Power Steering	Yes
Make	Lexus	Power Window Auto-Reverse	No
Model	RX350	Driver Frontal Airbag	Yes
Body Style	SUV	Driver Curtain Airbag	Yes
VIN	2T2HZMDA2MC269207	Driver Head/Torso Airbag	No
Body Color	Silver	Driver Torso Airbag	No
Odometer Reading (km /mi)	12 mi	Driver Torso/Pelvis Airbag	Yes
Engine Displacement (L)	3.5	Driver Pelvis Airbag	No
Type / No. Cylinders	V6	Driver Knee Airbag	Yes
Engine Placement	Transverse	Front Pass. Frontal Airbag	Yes
Transmission Type	Automatic	Front Pass. Curtain Airbag	Yes
Transmission Speeds	8-Speed	Front Pass. Head/Torso Airbag	No
Overdrive	Yes	Front Pass. Torso Airbag	No
Final Drive	All Wheel Drive	Front Pass. Torso/Pelvis Airbag	Yes
Roof Rack	No	Front Pass. Pelvis Airbag	No
Sunroof / T-Top	Yes	Front Pass. Knee Airbag	No
Running Boards	No	Driver Pretensioner	Yes
Tilt Steering Wheel	Yes	Driver Load Limiter	Yes
Power Seats	Yes	Front Pass. Pretensioner	Yes
Anti-Lock Brakes (ABS)	Yes	Front Pass. Load Limiter	Yes
Automatic Door Locks (ADLs)	Yes	Passenger Seat Pan Airbag	Yes

Does owner's manual provide instructions to turn off automatic door locks?

Yes

DATA FROM CERTIFICATION LABEL

Manufactured By	Toyota Manufacturing Canada Inc.	GVWR (kg)	2660
Date of Manufacture	11/20	GAWR Front (kg)	1360
		GAWR Rear (kg)	1460

VEHICLE SEATING AND WEIGHT CAPACITY DATA


Measured Parameter	Front	Rear	Third	Total
Type of Seats	Bucket	Bench	N/A	
Number of Occupants	2	3	N/A	5
Capacity Wt. (VCW) (kg)				420
Cargo Wt. (RCLW) (kg)				70.8

DATA SHEET NO. 1 ... (CONTINUED)
GENERAL TEST AND VEHICLE PARAMETER DATA

Test Vehicle: 2021 Lexus RX350 SUV
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20215102
 Test Date: 12/10/2020

Collect items circled in red, tire manufacturer, and tire name.

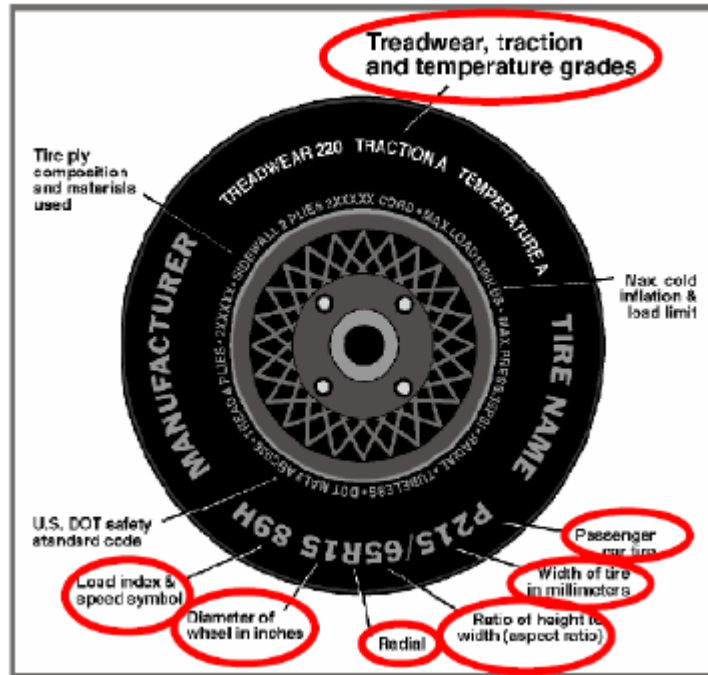

VEHICLE TIRE INFORMATION

Measured Parameter	Front	Rear
Maximum Tire Pressure (kPa)	350	350
Cold Pressure (kPa)	230	230
Recommended Tire Size	235/65R18	235/65R18
Tire Size on Vehicle	235/65R18	235/65R18
Tire Manufacturer	Michelin	Michelin
Tire Model	Premier LTX	Premier LTX
Treadwear	620	620
Traction	A	A
Temperature Grades	A	A
Tire Plies Sidewall	2 Polyester	2 Polyester
Tire Plies Body	2 Polyester, 2 Polyamide, 2 Steel	2 Polyester, 2 Polyamide, 2 Steel
Load Index / Speed Symbol	106V	106V
Tire Material	Rubber	Rubber
DOT Safety Code Left	M3MBK0KX3420	M3MBK0KX3420
DOT Safety Code Right	M3MBK0KX3420	M3MBK0KX3420

DATA SHEET NO. 1 ... (CONTINUED)
GENERAL TEST AND VEHICLE PARAMETER DATA

Test Vehicle: 2021 Lexus RX350 SUV
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20215102
 Test Date: 12/10/2020

TEST VEHICLE WEIGHTS

	Units	As Delivered Weights (UVW)			As Tested Weights (ATW)		
		Front Axle	Rear Axle	Total	Front Axle	Rear Axle	Total
Left	kg	578	452		620	519	
Right	kg	592	415		607	496	
Ratio	%	57.4	42.6		54.7	45.3	
Totals	kg	1170	867	2037	1227	1015	2242

TARGET TEST WEIGHT CALCULATION

Measured Parameter	Units	Value	
Total Delivered Weight (UVW)	kg	2037	(A)
Weight of 1 P572E ATD & 1 P572O ATD	kg	142	(B)
Rated Cargo / Luggage Weight (RCLW)	kg	70.8	(C)
Calculated Vehicle Target Weight (TVTW)	kg	2249.8	(A+B+C)

TEST VEHICLE ATTITUDES AND CG

Condition	Units	LF	RF	LR	RR	CG (aft of front axle)
As Delivered	mm	893	891	917	913	1187
As Tested	mm	884	881	887	890	1263
Post-Test	mm	870	858	887	892	

GENERAL TEST VEHICLE DATA

Measurement Description	Units	Value
Total Vehicle Wheel Base	mm	2790
Total Vehicle Length at Left Side	mm	4816
Total Vehicle Length at Centerline	mm	4892
Total Vehicle Length at Right Side	mm	4816
Weight of Ballast in Cargo Area	kg	29
Weight of Vehicle Components Removed	kg	38
Amount of Stoddard Solvent in Fuel Tank	L	67.4

LIST OF COMPONENTS REMOVED TO MEET TEST WEIGHT:

Trunk carpeting, spare tire, jack

DATA SHEET NO.1 ... (CONTINUED)
GENERAL TEST AND VEHICLE PARAMETER DATA

Test Vehicle: 2021 Lexus RX350 SUV
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20215102
 Test Date: 12/10/2020

TARGET VEHICLE STRUCTURAL MEASUREMENT

No.	Description	Pre-Test
1	Total Length	4892
2	Total Width	1897
3*	Bumper Top Height	627
4*	Bumper Bottom Height	526
5*	Longitudinal Member Top Height	659
6	Distance Between Longitudinal Members	1054
7	Longitudinal Member Width	61
8*	Engine Top Height	762
9*	Engine Bottom Height	282
10	Engine and Gearbox Width	491
11	Front Bumper-Engine Distance	615
12*	Front Shock Absorber Fixing Height	1047
13*	Bonnet Leading Edge Height	954
14	Front Shock Absorber Fixing Width	1167
15	Front Bumper – Front Axle Distance	1083
16	Front Axle – A Pillar Distance	502
17	A-Pillar – B-Pillar Distance	1102
18	B-Pillar – Rear Axle Distance	1185
19	B-Pillar – C-Pillar Distance	1013
20*	Roof Sill Bottom Height	1609
21*	Roof Sill Top Height	1652
22*	Floor Sill Bottom Height	449
23*	Floor Sill Top Height	517

*Height Measurements are taken from the ground
 Note: All measurements are in millimeters


DATA SHEET NO. 2
SEAT ADJUSTMENT, FUEL SYSTEM, AND STEERING WHEEL DATA

Test Vehicle: 2021 Lexus RX350 SUV
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20215102
 Test Date: 12/10/2020

NOMINAL DESIGN RIDING POSITION

The driver's seat back was set to the manufacturer's designated angle. The passenger's seat back was positioned in a similar manner as the driver's seat back. Seat back angles are measured at the headrest post bezel using a digital inclinometer.

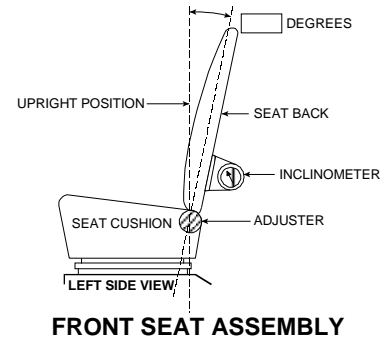

Seating Position	Degrees
Driver Seat Back Angle	3.1
Passenger Seat Back Angle	1.0

SEAT FORE / AFT POSITIONS


The driver's seat was positioned at the mid-point of fore/aft travel at its lowest position. The passenger's seat was positioned at the most forward position of fore/aft travel. Zero is defined as the forward most position.

Seating Position	Total Fore / Aft Travel	Placed in Position #
Driver Seat	335	167.5
Passenger Seat	262	0

SEAT BELT UPPER ANCHORAGE

The driver's seat belt anchorage was positioned according to the manufacturer's designated positioning for a 50th percentile adult male ATD. The passenger's seat belt anchorage was positioned according to the manufacturer's designated positioning for a 5th percentile adult female ATD. For this test zero is defined as the uppermost position.

Seating Position	Total # of Positions	Placed in Position #
Driver Seat	4 (0-3)	0
Passenger Seat	4 (0-3)	0

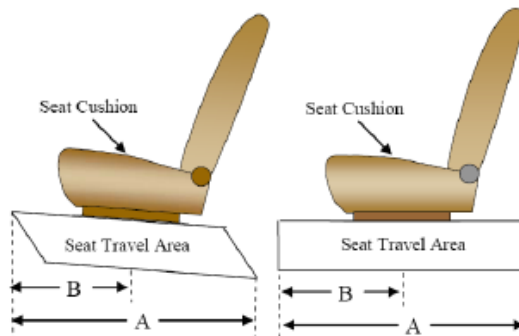

DATA SHEET NO. 2 ... (CONTINUED)
SEAT ADJUSTMENT, FUEL SYSTEM, AND STEERING WHEEL DATA

Test Vehicle: 2021 Lexus RX350 SUV
 Test Program: NCAP Frontal Barrier Impact Test


NHTSA No.: M20215102
 Test Date: 12/10/2020

FUEL TANK CAPACITY

Description	Liters
Usable Capacity of "Standard Tank"	72.5
Usable Capacity of "Optional Tank"	N/A
92%-94% of Usable Capacity	66.7 – 68.15
Actual Amount of Solvent Used	67.4
1/3 of Usable Capacity	24.2


FUEL PUMP

The vehicle is equipped with an electric fuel pump. The fuel filler neck is on the left side of the vehicle. The pump creates positive pressure in the fuel lines, pushing the gasoline to the engine. See form 1 for more information.

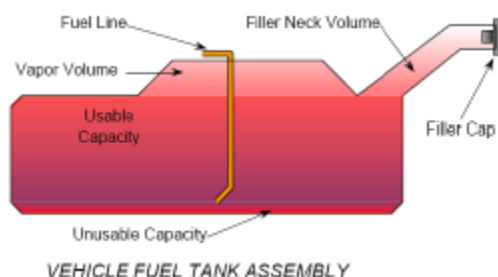

STEERING COLUMN ADJUSTMENT

Steering wheel and column adjustments are made so that the steering wheel hub is at the geometric center of the locus it describes when moved through its full range of motion. For angular measurements, a digital inclinometer was used to measure a plate which was placed across the steering wheel rim. A tape measure was used to measure the telescoping steering wheel travel.

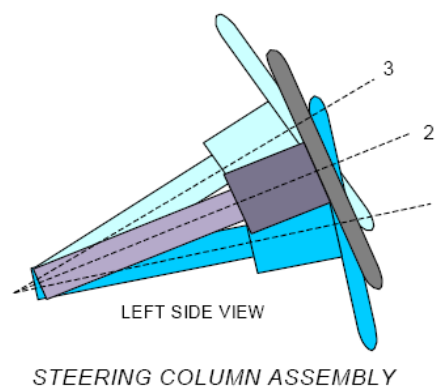


STEERING COLUMN POSITIONS

Description	Degrees	Fore / Aft Position (mm)
Lowermost position No. 1	20.9	
Geometric center position No. 2	23	
Uppermost position No. 3	25.4	
Telescoping Steering Wheel Travel		48
Test Position	23	24

DATA SHEET NO. 3
DUMMY LONGITUDINAL CLEARANCE DIMENSIONS

Test Vehicle: 2021 Lexus RX350 SUV
Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20215102
Test Date: 12/10/2020

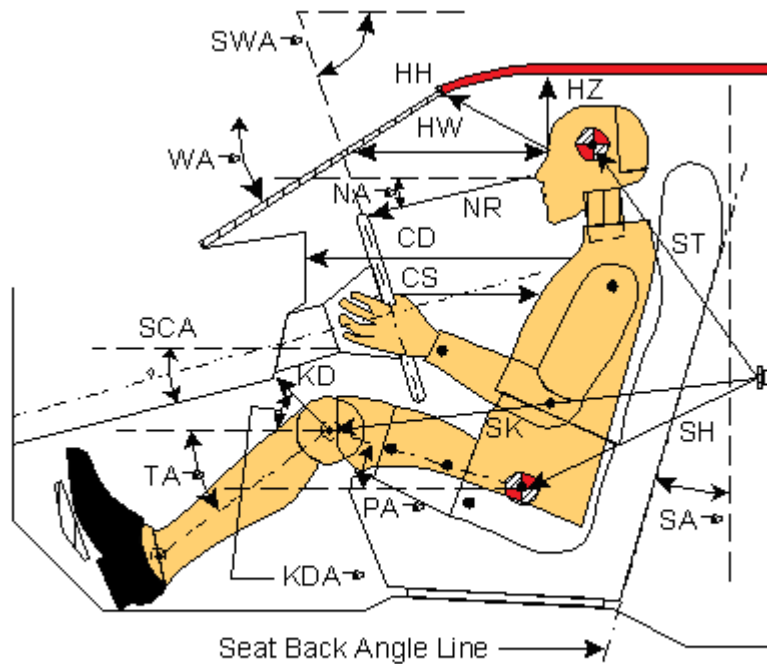


Left Side View

Code	Measurement Description	Driver (SN: 142)		Passenger (SN: 139)	
		Length (mm)	Angle (°)	Length (mm)	Angle (°)
WA°	Windshield Angle		26.7		
SWA°	Steering Wheel Angle		23.6		
SCA°	Steering Column Angle		66.4		
SA°	Seat Back Angle (on headrest post)		3.1		1.0
HZ	Head to Roof (Z)	191	90	208	90
HH	Head to Header	403	27.4	330	45.1
HW	Head to Windshield	722	0	693	0
NR	Nose to Rim / Dash	373	10.6	428	26.3
CD	Chest to Dash	501		330	
CS	Chest to Steering Hub	279	5.7		
RA	Rim to Abdomen	168	0		
KDL	Left Knee to Dash	151	31.7	75	29.8
KDR	Right Knee to Dash	132	8.2	78	28.3
PA°	Pelvic Angle		23.9		19.2
TA°	Tibia Angle		35.0		40.7
SK	Striker to Knee	655	13.7	772	13.8
ST	Striker to Head	392	63.2	453	51.8
SH	Striker to H-Point	372	55.0	492	28.5

DATA SHEET NO. 4
DUMMY LATERAL CLEARANCE DIMENSIONS

Test Vehicle: 2021 Lexus RX350 SUV
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20215102
 Test Date: 12/10/2020

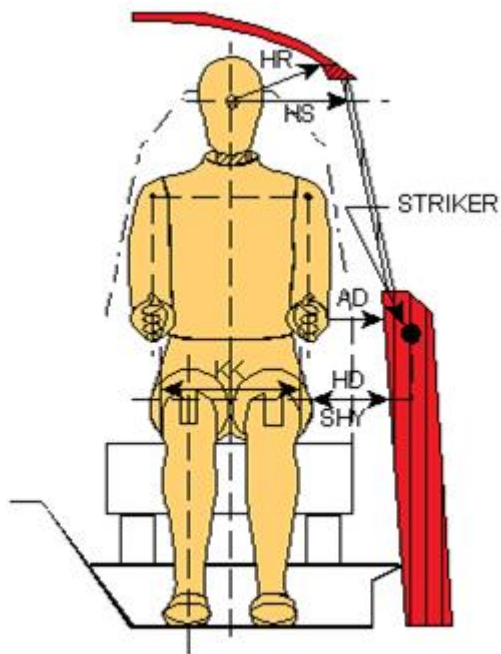


Front View

Code	Description	Driver (mm)	Passenger (mm)
AD	Arm to Door	145	88
HD	H-Point to Door	170	267
HR	Head to Side Header	220	245
HS	Head to Side Window	345	365
KK	Knee to Knee	335	215
SHY	Striker to H-Point (Y Direction)	270	280
AA	Ankle to Ankle	335	165

**DATA SHEET NO. 5
SEAT BELT POSITIONING DATA**

Test Vehicle: 2021 Lexus RX350 SUV
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20215102
 Test Date: 12/10/2020

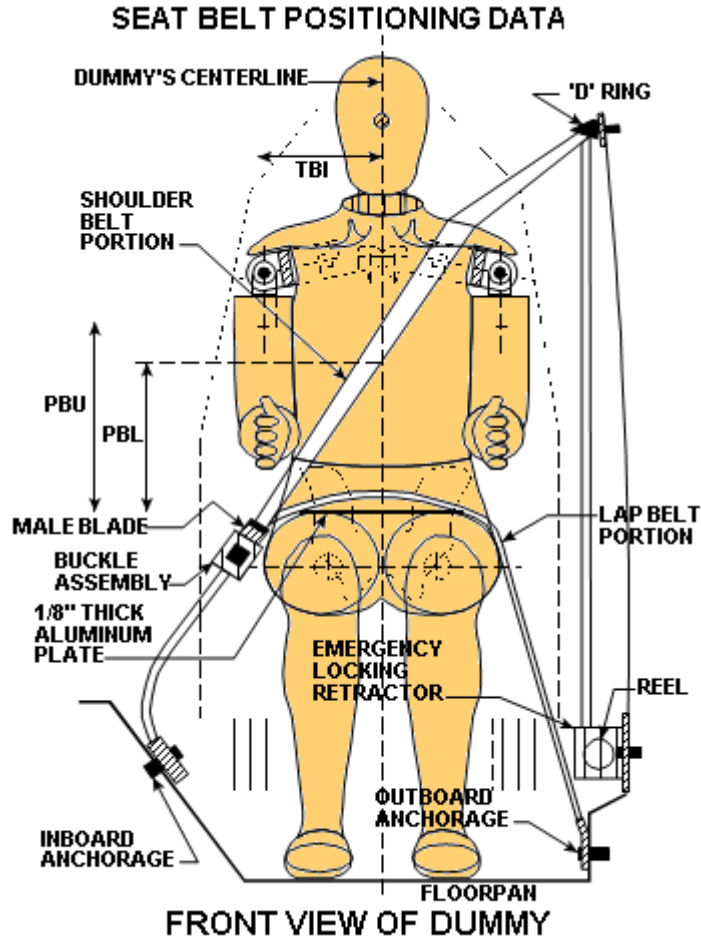

SEAT BELT POSITIONING MEASUREMENTS

Measurement Description	Units	Driver	Passenger
PBU — Top surface of reference to belt upper edge	mm	350	290
PBL — Top surface of reference to belt lower edge	mm	285	215

BELT LENGTH DATA


Measurement Description	Units	Driver	Passenger
Shoulder belt length as measured on ATD	mm	870	958
Lap Belt Length as measured on ATD	mm	835	920
Remainder of belt on reel	mm	895	722
Total belt length for continuous webbing systems	mm	2600	2600

DATA SHEET NO. 6
HIGH-SPEED CAMERA LOCATIONS AND DATA

Test Vehicle: 2021 Lexus RX350 SUV
Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20215102
Test Date: 12/10/2020

CAMERA POSITIONS FOR FRONTAL IMPACTS

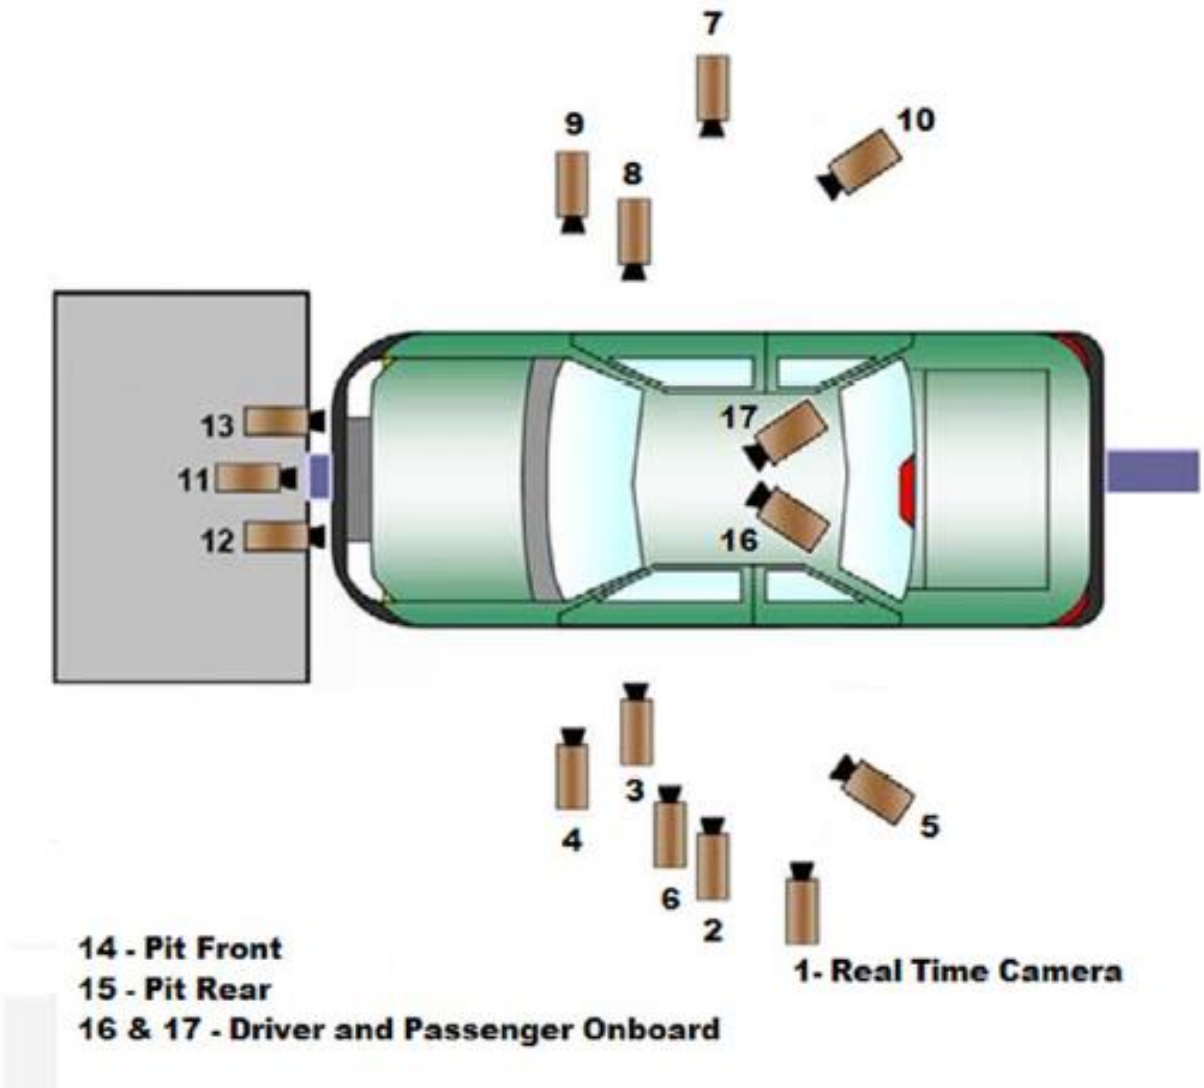

DATA SHEET NO. 6 ... (CONTINUED)
HIGH-SPEED CAMERA LOCATIONS AND DATA

Test Vehicle: 2021 Lexus RX350 SUV
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20215102
 Test Date: 12/10/2020

CAMERA LOCATIONS


No.	Camera View	Location (mm)			Lens (mm)	Speed (fps)
		X	Y	Z		
1	Real-Time Left Overall	-	-	-		60
2	Left Overall	-1993	-8128	-1412	24	1000
3	Driver Close-Up	-1458	-7683	-1423	50	1000
4	Left Front Half	-1043	-6374	-1399	28	1000
5	Left Angle	-4126	-5061	-2471	50	1000
6	Steering Column	-1475	-9482	-2301	75	1000
7	Right Overall	-2208	7543	-1254	24	1000
8	Passenger Close-Up	-1458	6964	-1445	50	1000
9	Right Front Half	-845	6211	-1275	28	1000
10	Right Angle	-4277	4447	-2544	50	1000
11	Windshield	1181	0	-3471	24	1000
12	Driver Windshield	773	-453	-2440	25	1000
13	Passenger Windshield	773	453	-2440	25	1000
14	Pit Front	-923	0	2530	12.5	1000
15	Pit Rear	-2647	0	2427	12.5	1000
16	Onboard Driver Airbag (Optional)				8	1000
17	Onboard Passenger Airbag (Optional)				8	1000

* COORDINATES: +X = forward of impact plane
 +Y = right of monorail center
 +Z = into ground

DATA SHEET NO. 7
VEHICLE ACCELEROMETER LOCATIONS

Test Vehicle: 2021 Lexus RX350 SUV
Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20215102
Test Date: 12/10/2020

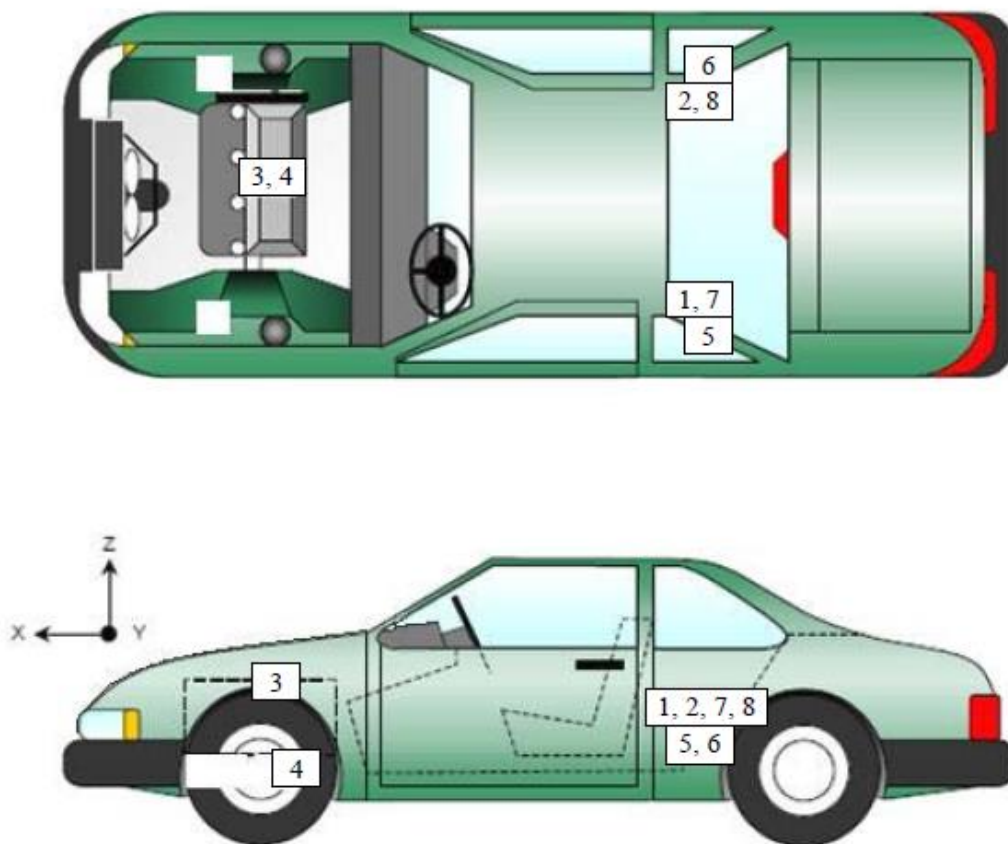

VEHICLE ACCELEROMETER PRE-TEST LOCATIONS

No.	Accelerometer Location	Measurements (mm)		
		X	Y	Z
1	Left Rear Accelerometer – X Direction	1873	-300	119
2	Right Rear Accelerometer – X Direction	1872	303	120
3	Engine Top X	3843	175	-320
4	Engine Bottom X	4525	224	375
5	Left Rear Accelerometer – Z Direction	1873	-300	119
6	Right Rear Accelerometer – Z Direction	1872	303	120
7	Left Rear Accelerometer – X Direction Redundant	1872	-298	119
8	Right Rear Accelerometer – X Direction Redundant	1872	303	120

Reference Points: *X – Rear Surface of Vehicle (+ forward)*
 Y – Vehicle Centerline (+ to right)
 Z – Ground Plane (+ down)




DATA SHEET NO. 8
PHOTOGRAPHIC REFERENCE TARGET LOCATIONS

Test Vehicle: 2021 Lexus RX350 SUV
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20215102
 Test Date: 12/10/2020

Item	Value
A	392
B	949
C	2896
D	612
E	1384
F	185
G	1912
H	1189
I	1624
J	866
K	885
L	1517
M	1186
N	1518
O	875
P	872
Q	1627

All units in millimeters

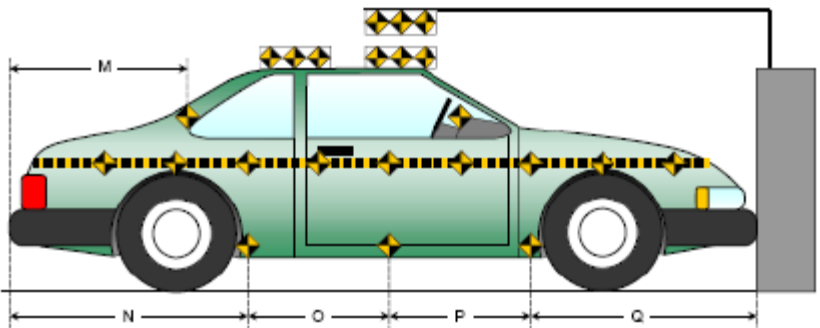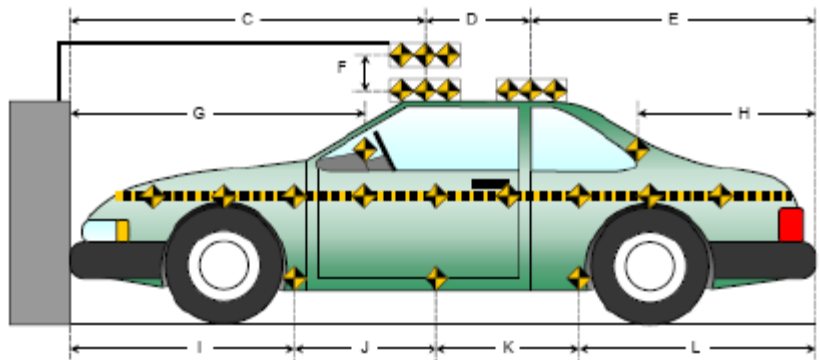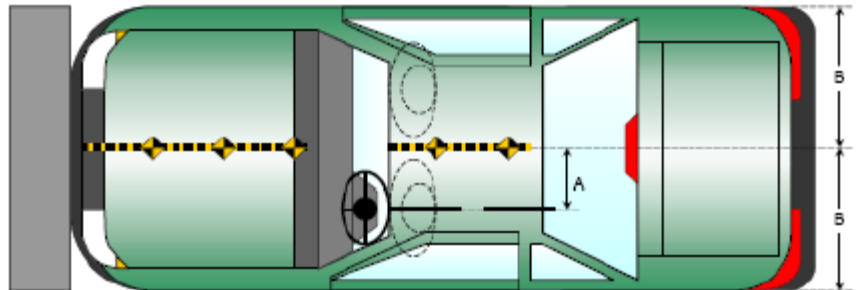

DATA SHEET NO. 9
LOAD CELL LOCATIONS ON FIXED BARRIER

Test Vehicle: 2021 Lexus RX350 SUV
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20215102
 Test Date: 12/10/2020

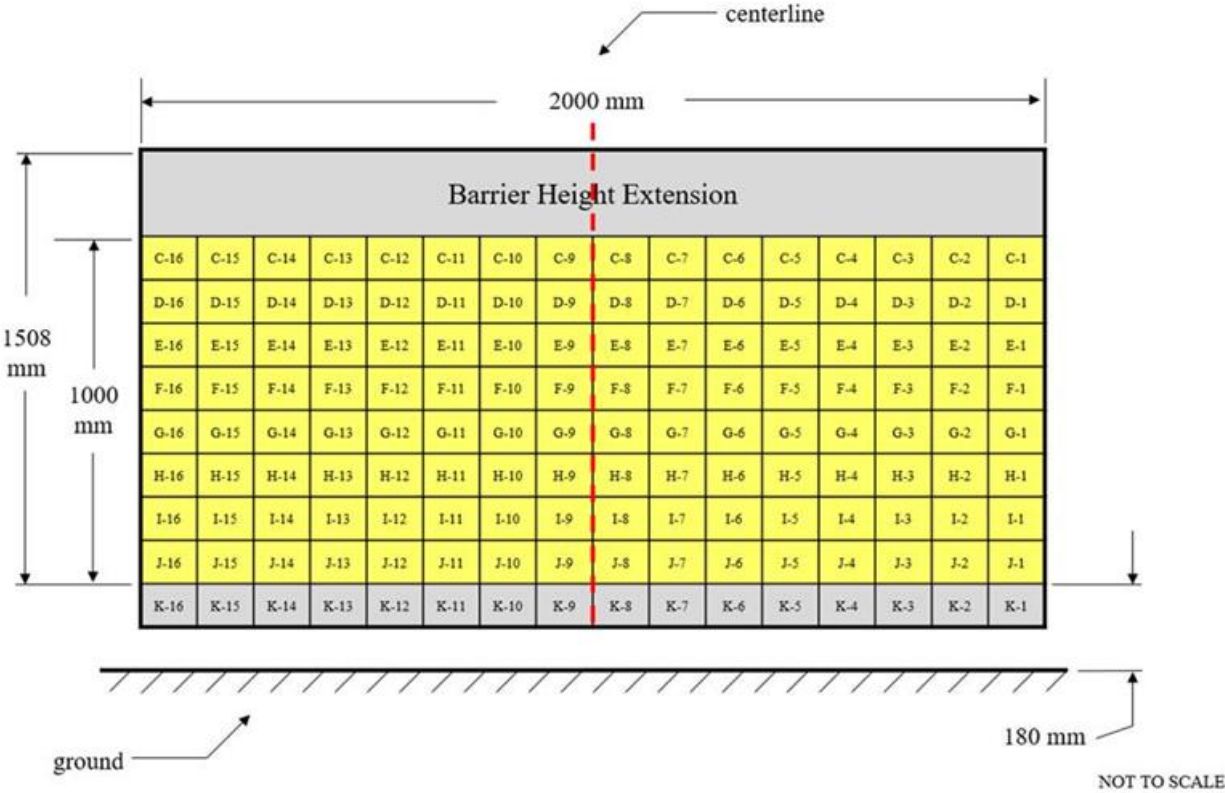


Figure 1 - Load Cell Locations on a 128-Load Cell Barrier with Plywood Height Extension*
 Please note above diagram is not actual representation of load cell barrier used.

DATA SHEET NO. 10
TEST VEHICLE SUMMARY OF RESULTS

Test Vehicle: 2021 Lexus RX350 SUV
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20215102
 Test Date: 12/10/2020

INSTRUMENTATION

Instrumentation	Number of Channels Collected
Driver Dummy Accelerometers	47
Passenger Dummy Accelerometers	47
Vehicle Structure Accelerometers	8
Load Cell Barrier	384
Total	486

CAMERA COVERAGE

Type of Camera	Number Used in this Test
High-Speed Vehicle Onboard	2
High-Speed Offboard	14
Real-Time Panning	1
Total	17

**DATA SHEET NO. 11
POST-TEST OBSERVATIONS**

Test Vehicle: 2021 Lexus RX350 SUV
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20215102
 Test Date: 12/10/2020

TEST DUMMY INFORMATION AND CONTACT LOCATIONS

Description	Driver	Passenger
Dummy Type / Serial No.	P572E 50 th Male / 142	P5720 5 th Female / 139
Head Contact	Frontal Airbag & Headrest	Frontal Airbag & Headrest
Upper Torso Contact	Frontal Airbag	Frontal Airbag
Lower Torso Contact	None	None
Left Knee Contact	Knee Airbag	Glove Box
Right Knee Contact	Knee Airbag	Glove Box

DOOR OPENING AND SEAT TRACK INFORMATION

Description	Driver	Passenger	Other
Locked / Unlocked Doors	Unlocked	Unlocked	
Front Door Opening	Closed & Operational	Closed & Operational	
Rear Door Opening	Closed & Operational	Closed & Operational	
Trunk/Hatch/Tailgate Opening			Closed & Operational
Seat Track Shift (mm)	0	0	
Seat Back Movement from Initial Position	None	None	

POST-TEST STRUCTURAL OBSERVATIONS

Critical Areas of Performance	Observations and Conclusions
Windshield Damage	Cracks along bottom edge and Driver A-Pillar
Window Damage	None
Other	None

VEHICLE REBOUND FROM BARRIER

Measured Parameter	Units	Value
Left Side	mm	817
Center	mm	825
Right Side	mm	823
Average	mm	821


SUPPLEMENTAL RESTRAINT SYSTEM INFORMATION

Restraint Type	Driver		Passenger	
	Installed	Deployed	Installed	Deployed
Front Airbag	Yes	Yes	Yes	Yes
Side Airbag 1 - Curtain	Yes	Yes	Yes	Yes
Side Airbag 2 - Torso/Pelvis Airbag	Yes	Yes	Yes	Yes
Knee Airbag	Yes	Yes	No	N/A
Seat Belt Pretensioner	Yes	Yes	Yes	Yes
Seat Belt Load Limiter	Yes	Yes	Yes	Yes
Other – Seat Pan Airbag	No	N/A	Yes	Yes

DATA SHEET NO. 12
VEHICLE PROFILE MEASUREMENTS

Test Vehicle: 2021 Lexus RX350 SUV
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20215102
 Test Date: 12/10/2020

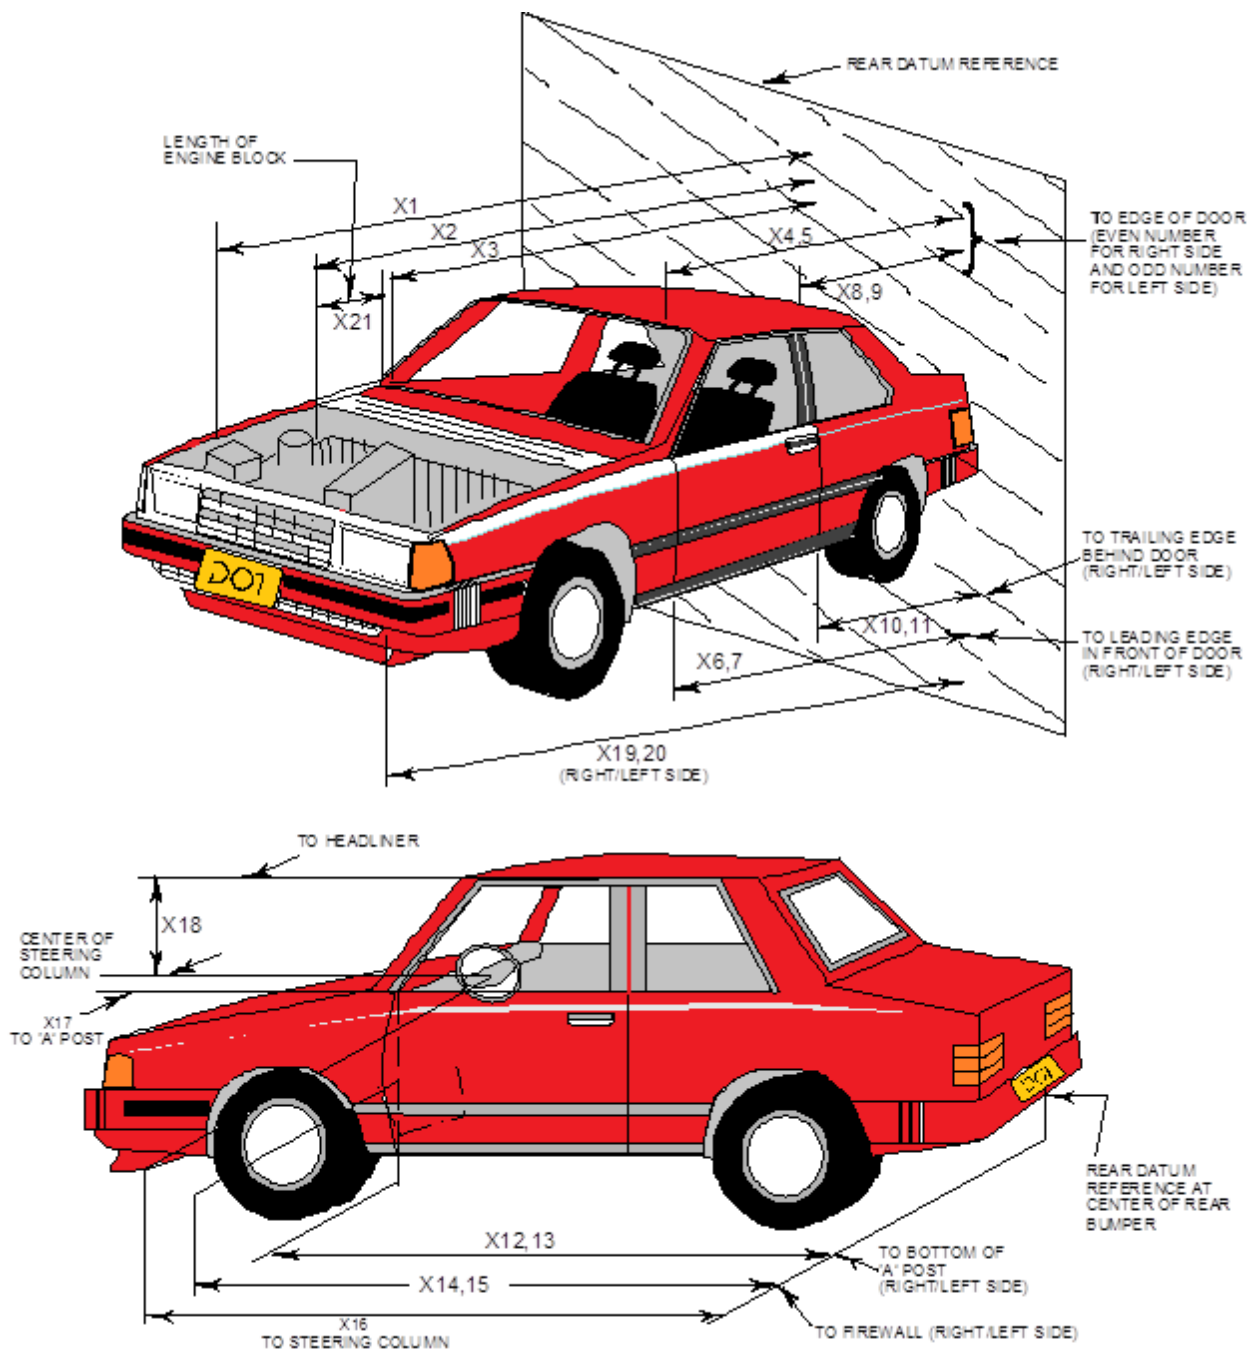

**DATA SHEET NO. 12 ... (CONTINUED)
VEHICLE PROFILE MEASUREMENTS**

Test Vehicle: 2021 Lexus RX350 SUV
Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20215102
Test Date: 12/10/2020

No.	Measurement Description	Pre-Test	Post-Test	Difference
1	Total Length of Vehicle at Centerline	4892	4293	-599
2	Rear Surface of Vehicle (RSOV) to Front of Engine	4277	3966	-311
3	RSOV to Firewall	3877	3822	-55
4	RSOV to Upper Leading Edge of Right Door	3302	3302	0
5	RSOV to Upper Leading Edge of Left Door	3303	3307	4
6	RSOV to Lower Leading Edge of Right Door	3269	3267	-2
7	RSOV to Lower Leading Edge of Left Door	3269	3273	4
8	RSOV to Upper Trailing Edge of Right Door	2209	2210	1
9	RSOV to Upper Trailing Edge of Left Door	2211	2214	3
10	RSOV to Lower Trailing Edge of Right Door	2218	2221	3
11	RSOV to Lower Trailing Edge of Left Door	2220	2223	3
12	RSOV to Bottom of "A" Post of Right Side	3385	3385	0
13	RSOV to Bottom of "A" Post of Left Side	3386	3387	1
14	RSOV to Firewall, Right Side	3528	3526	-2
15	RSOV to Firewall, Left Side	3528	3523	-5
16	RSOV to Steering Column	2804	2849	45
17	Center of Steering Column to "A" Post	311	310	-1
18	Center of Steering Column to Headliner	447	464	17
19	RSOV to Right Side of Front Bumper	4850	4271	-579
20	RSOV to Left Side of Front Bumper	4850	4341	-509
21	Length of Engine Block	422	422	0
RD	RSOV to Right Side of Dash Panel	2985	2988	3
CD	RSOV to Center of Dash Panel	2982	2984	2
LD	RSOV to Left Side of Dash Panel	2985	2988	3

*UR= Unrecoverable data point
All Dimensions in mm

DATA SHEET NO. 13
ACCIDENT INVESTIGATION DIVISION DATA

Test Vehicle: 2021 Lexus RX350 SUV
Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20215102
Test Date: 12/10/2020


VEHICLE INFORMATION

VIN: 2T2HZMDA2MC269207
Vehicle Size Category: MPV

Wheelbase (mm): 2790
Test Weight (kg): 2242

ACCELEROMETER DATA

Accelerometer Locations: Please See Data Sheet No. 7
Cal. Procedure / Interval: Calspan Procedure / 6 month
Integration Algorithm: Trapezoidal
Linearity: > 99%
Impact Velocity (km/h): 56.23
Velocity Change (km/h): 64.27
Time of Separation (ms): 156

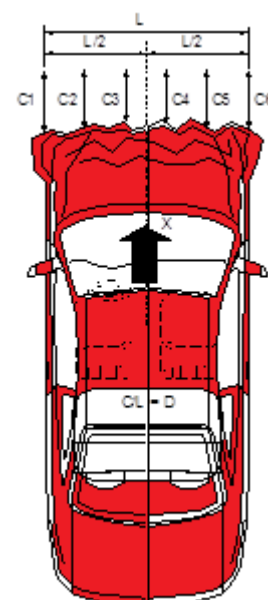

CRUSH PROFILE

Collision Deformation Classification: 12FDEW2
Midpoint of Damage: C4
Damage Region Length (mm): 1480
Impact Mode: Frontal

No.	Measurement Description	Units	Pre-Test	Post-Test	Difference
C1	Crush Zone 1 at Left Side	mm	4607	4232	375
C2	Crush Zone 2 at Left Side	mm	4785	4310	475
C3	Crush Zone 3 at Left Side	mm	4853	4363	490
C4	Crush Zone 4 at Right Side	mm	4848	4351	497
C5	Crush Zone 5 at Right Side	mm	4780	4305	475
C6	Crush Zone 6 at Right Side	mm	4605	4251	354
L	C1 to C6	mm	1480	1611	-131

**DATA SHEET NO. 14
VEHICLE INTRUSION MEASUREMENTS**

Test Vehicle: 2021 Lexus RX350 SUV
 Test Program: NCAP Frontal Barrier Impact Test


NHTSA No.: M20215102
 Test Date: 12/10/2020

DOOR OPENING WIDTH

Item	Description	Units	Pre-Test	Post-Test	Difference
A	Left Side Upper	mm	1006	1007	1
B	Left Side Lower	mm	839	840	1
D	Right Side Upper	mm	1007	1007	0
E	Right Side Lower	mm	840	842	2

WHEELBASE MEASUREMENTS

Item	Description	Units	Pre-Test	Post-Test	Difference
C	Left Side Wheelbase	mm	2790	2750	-40
F	Right Side Wheelbase	mm	2790	2771	-19

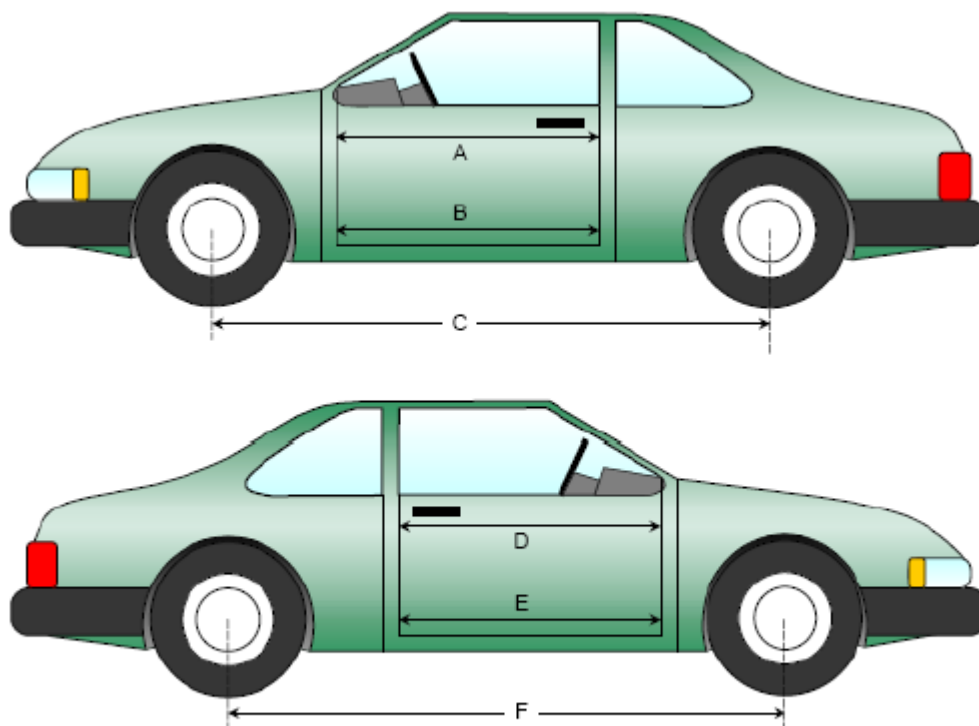

Left & Right Side Views

DATA SHEET NO.14 ... (CONTINUED)
VEHICLE INTRUSION MEASUREMENTS


Test Vehicle: 2021 Lexus RX350 SUV
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20215102
 Test Date: 12/10/2020

DRIVER COMPARTMENT INTRUSION

Item	Description	Units	Pre-Test	Post-Test	Difference
AB	Door Opening (Inside Window Jam)	mm	719	719	0
CX	Left Knee Bolster to X	mm	319	288	-31
DX	Right Knee Bolster to X	mm	318	271	-47
EX	Brake Pedal to X	mm	613	533	-80
FX	Foot Rest to X	mm	678	612	-66
GX	Center of Steering Column Wheel Hub to X	mm	69	68	-1

X = Front of Seat Track (Stationary)

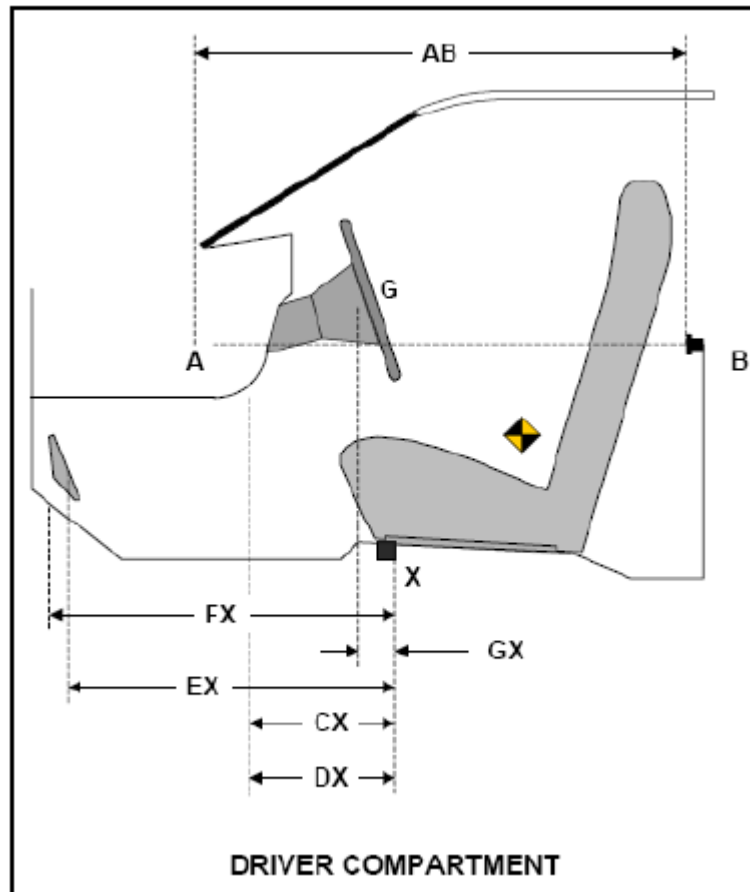

DATA SHEET NO. 15
SUMMARY OF FMVSS 212, 219 (PARTIAL), AND 301 DATA

Test Vehicle: 2021 Lexus RX350 SUV
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20215102
 Test Date: 12/10/2020


Windshield Mounting Details: A 0.8 mm trim surrounds the top and side of windshield while a plastic shroud is on the bottom.

The standard requires that the post-test retention measurement be a minimum of 75% of the pre-test total periphery measurement for vehicles not equipped with occupant passive restraints and 50% for each side of the windshield for vehicles which are equipped with occupant passive restraints.

Temperature of windshield molding during test: 21° C

WINDSHIELD PERIPHERY MEASUREMENTS

Measurement	Pre-Test (mm)	Post-Test (mm)	% Retention
Left Side	2340	2340	100
Right Side	2340	2340	100
Total	4660	4660	100

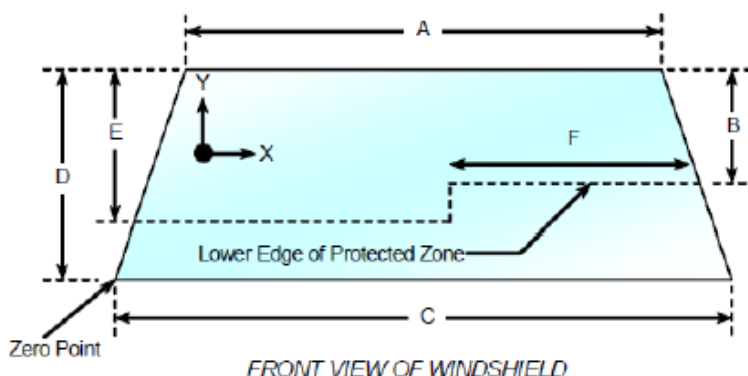

Item	Units	Value
A	mm	1250
B	mm	615
C	mm	1490
D	mm	970
E	mm	620
F	mm	615

AREAS OF PROTECTED ZONE FAILURES

- A. Provide coordinates of the area that the protected zone was penetrated more than .25 inches by a vehicle component other than one that is normally in contact with the windshield.
- No Penetration

X	Y

- B. Provide coordinates of the area beneath the protected zone that the inner surface of the windshield was penetrated by a vehicle component.
- No Penetration

X	Y

DATA SHEET NO. 15 ... (CONTINUED)
SUMMARY OF FMVSS 212, 219 (PARTIAL), AND 301 DATA

Test Vehicle: 2021 Lexus RX350 SUV
Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20215102
Test Date: 12/10/2020

FMVSS 301 FUEL SYSTEM INTEGRITY POST IMPACT DATA

Temperature at Time of Impact: 21 ° C

Test Time: 10:34 AM


STODDARD SOLVENT SPILLAGE MEASUREMENTS

- A. From impact until vehicle motion ceases: 0 oz.
(Maximum allowable is 1 oz.)
- B. For the 5-minute period after motion ceases: 0 oz.
(Maximum allowable is 5 oz.)
- C. For the following 25 minutes: 0 oz.
(Maximum allowable is 1 oz./minute)
- D. Spillage: No Spillage Occurred

DATA SHEET NO. 16
FMVSS 301 STATIC ROLLOVER RESULTS

Test Vehicle: 2021 Lexus RX350 SUV
Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20215102
Test Date: 12/10/2020

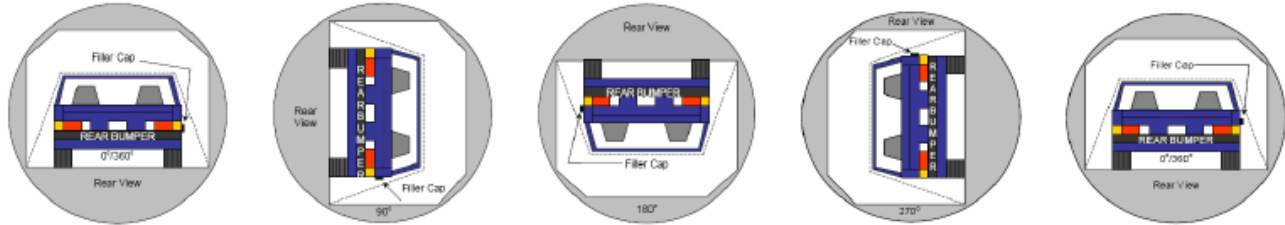

0° TO 90° 90° TO 180° 180° TO 270° 270° TO 360°

1. The specified fixture rollover rate for each 90° of rotation is 60 to 180 seconds.
2. The position hold time at each position is 300 seconds (minimum).
3. Details of Stoddard Solvent Spillage: No Spillage Occurred

SOLVENT COLLECTION TIME TABLE IN SECONDS

Test Phase	Rotation Time	Hold Time	Total Time
0° to 90°	72	300	372
90° to 180°	68	300	368
180° to 270°	65	300	365
270° to 360°	67	300	367

FMVSS 301 SPILLAGE TABLE

Test Phase	First 5 Minutes	Sixth Minute	Seventh Minute	Eighth Minute
0° to 90°	0	0	0	
90° to 180°	0	0	0	
180° to 270°	0	0	0	
270° to 360°	0	0	0	


SOLVENT SPILLAGE LOCATION TABLE

Test Phase	Spillage Location
0° to 90°	None
90° to 180°	None
180° to 270°	None
270° to 360°	None

DATA SHEET NO. 17
DUMMY / VEHICLE TEMPERATURE STABILIZATION CHART

Test Vehicle: 2021 Lexus RX350 SUV
Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20215102
Test Date: 12/10/2020

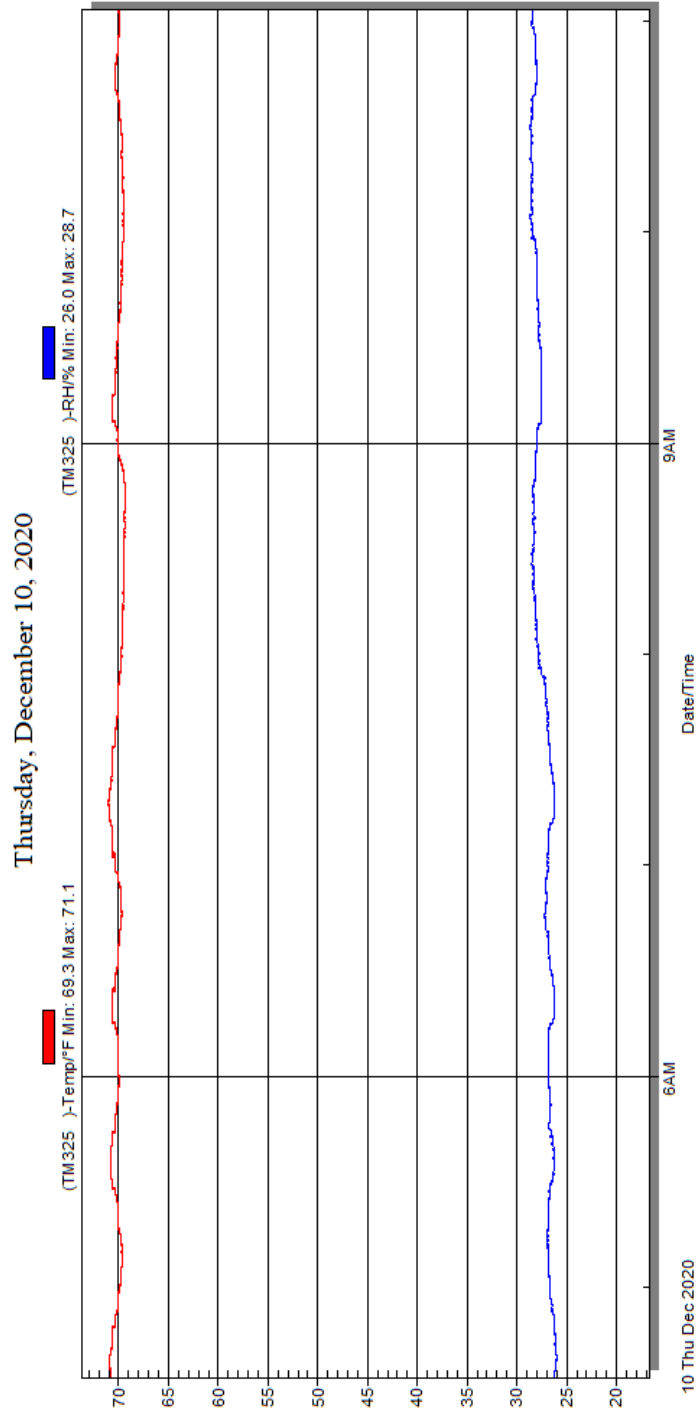

Temperature and Humidity Stabilization Chart/Data for Dummies and Test Vehicle

APPENDIX A
PHOTOGRAPHS

TABLE OF PHOTOGRAPHS

Fig.	Description	Page
1	Load Cell Location	A-5
2	Pre-Test Load Cell Wall	A-5
3	Post-Test Load Cell Wall	A-6
4	Manufacturer's Label	A-6
5	Tire Placard	A-7
6	2021 Lexus RX350 Frontal As Delivered	A-7
7	Left Rear 3-4 View, as Received	A-8
8	Pre-Test Front View of Test Vehicle	A-8
9	Post-Test Front View of Test Vehicle	A-9
10	Pre-Test Left View of Test Vehicle	A-9
11	Post-Test Left View of Test Vehicle	A-10
12	Pre-Test Right View of Test Vehicle	A-10
13	Post-Test Right View of Test Vehicle	A-11
14	Pre-Test Right Front 3-4 View	A-11
15	Post-Test Right Front 3-4 View	A-12
16	Pre-Test Left Rear 3-4 View	A-12
17	Post-Test Left Rear 3-4 View	A-13
18	Pre-Test Windshield View	A-13
19	Post-Test Windshield View	A-14
20	Pre-Test Engine Compartment View	A-14
21	Post-Test Engine Compartment View	A-15
22	Pre-Test Fuel Filler Cap View	A-15
23	Post-Test Fuel Filler Cap View	A-16
24	Pre-Test Front Underbody View ¹	A-16
25	Post-Test Front Underbody View ¹	A-17
26	Pre-Test Rear Underbody View ¹	A-17
27	Post-Test Rear Underbody View ¹	A-18
28	Pre-Test Dummy Cable Routing	A-18
29	Post-Test Dummy Cable Routing	A-19
30	Pre-Test Driver Dummy Front View	A-19
31	Post-Test Driver Dummy Front View	A-20
32	Pre-Test Driver Dummy Window View	A-20
33	Post-Test Driver Dummy Window View	A-21
34	Pre-Test Driver Dummy and Vehicle Interior View	A-21
35	Post-Test Driver Dummy and Vehicle Interior View	A-22

Fig.	Description	Page
36	Pre-Test Driver's Seat Fore-Aft Markings	A-22
37	Post-Test Driver's Seat Fore-Aft Markings	A-23
38	Pre-Test View of Belt Anchorage for Driver Dummy	A-23
39	Post-Test View of Belt Anchorage for Driver Dummy	A-24
40	Pre-Test View of Belt Buckle and Latch Plate for Driver Dummy	A-24
41	Post-Test View of Belt Buckle and Latch Plate for Driver Dummy	A-25
42	Pre-Test Driver Dummy Feet	A-25
43	Post-Test Driver Dummy Feet	A-26
44	Pre-Test Driver's Side Knee Bolster	A-26
45	Post-Test Driver's Side Knee Bolster	A-27
46	Pre-Test Driver's Side Floorpan	A-27
47	Post-Test Driver's Side Floorpan	A-28
48	Post-Test Driver Dummy Face	A-28
49	Post-Test Driver Dummy Contact With Airbag	A-29
50	Post-Test Driver Dummy Contact With Headrest	A-29
51	Pre-Test View of the Steering Wheel	A-30
52	Post-Test View of the Steering Wheel	A-30
53	Pre-Test Passenger Dummy Front View	A-31
54	Post-Test Passenger Dummy Front View	A-31
55	Pre-Test Passenger Dummy Window View	A-32
56	Post-Test Passenger Dummy Window View	A-32
57	Pre-Test Passenger Dummy and Vehicle Interior View	A-33
58	Post-Test Passenger Dummy and Vehicle Interior View	A-33
59	Pre-Test Passenger's Seat Fore-Aft Markings	A-34
60	Post-Test Passenger's Seat Fore-Aft Markings	A-34
61	Pre-Test View of Belt Anchorage for Passenger Dummy	A-35
62	Post-Test View of Belt Anchorage for Passenger Dummy	A-35
63	Pre-Test View of Belt Buckle and Latch Plate for Passenger Dummy	A-36
64	Post-Test View of Belt Buckle and Latch Plate for Passenger Dummy	A-36
65	Pre-Test Passenger Dummy Feet	A-37
66	Post-Test Passenger Dummy Feet	A-37
67	Pre-Test Passenger's Side Knee Bolster	A-38
68	Post-Test Passenger's Side Knee Bolster	A-38
69	Pre-Test Passenger's Side Floorpan	A-39
70	Post-Test Passenger's Side Floorpan	A-39
71	Post-Test Passenger Dummy Face	A-40

Fig.	Description	Page
72	Post-Test Passenger Dummy Contact With Airbag	A-40
73	Post-Test Passenger Dummy Contact With Headrest	A-41
74	Photograph of Ballast Installed in Vehicle	A-41
75	Post-Test Stoddard Solvent Spillage Location View, if Required	A-42
76	Post-Test Speed Trap Read-Out	A-42
77	Vehicle at 0° on Static Rollover Device	A-43
78	Vehicle at 90° on Static Rollover Device	A-43
79	Vehicle at 180° on Static Rollover Device	A-44
80	Vehicle at 270° on Static Rollover Device	A-44
81	Vehicle at 360° on Static Rollover Device	A-45
82	2021 Lexus RX350 Frontal Impact Event	A-45
83	Monroney Label Photograph	A-46

¹NOTE: *The underbody views should include the following vehicle components: fuel pump, fuel lines, sender unit, fuel tank filler pipe and any other visible system components.*

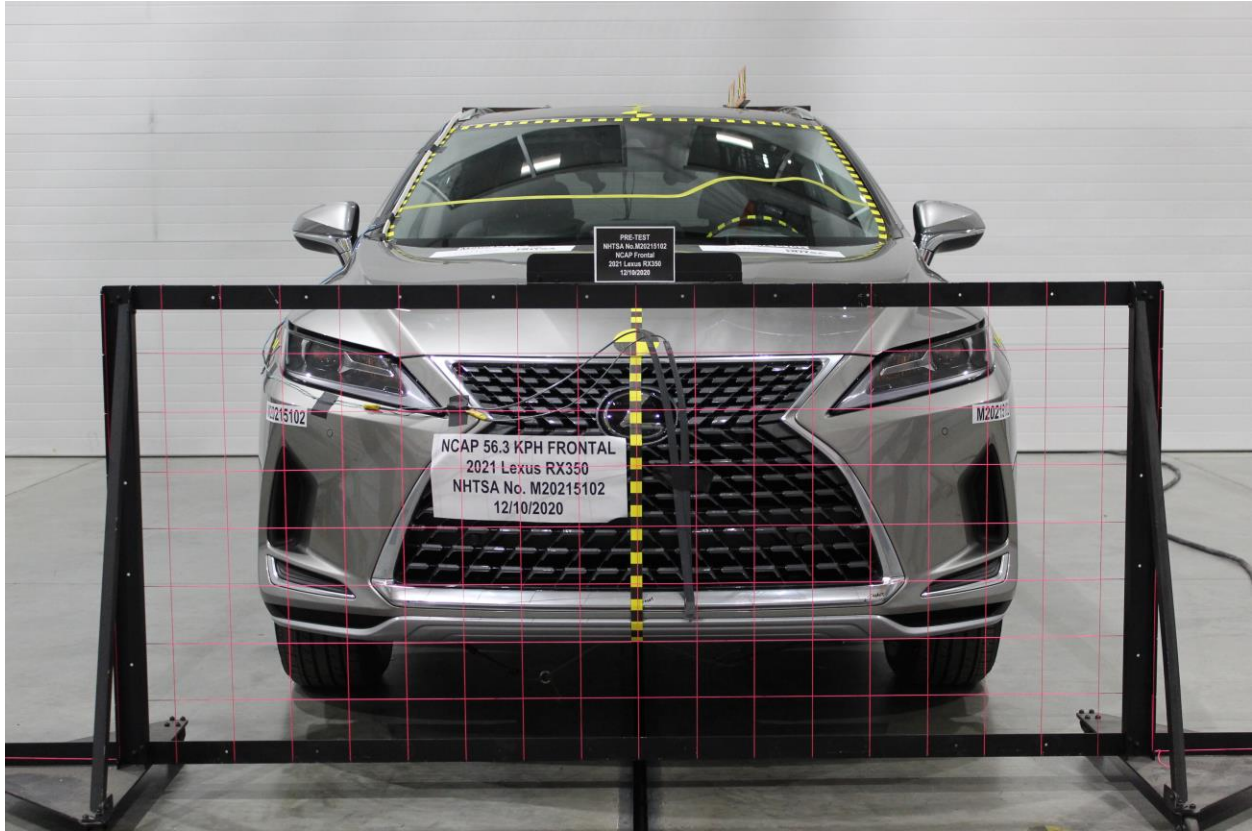


Figure A-1: Load Cell Location



Figure A-2: Pre-Test Load Cell Wall



Figure A-3: Post-Test Load Cell Wall

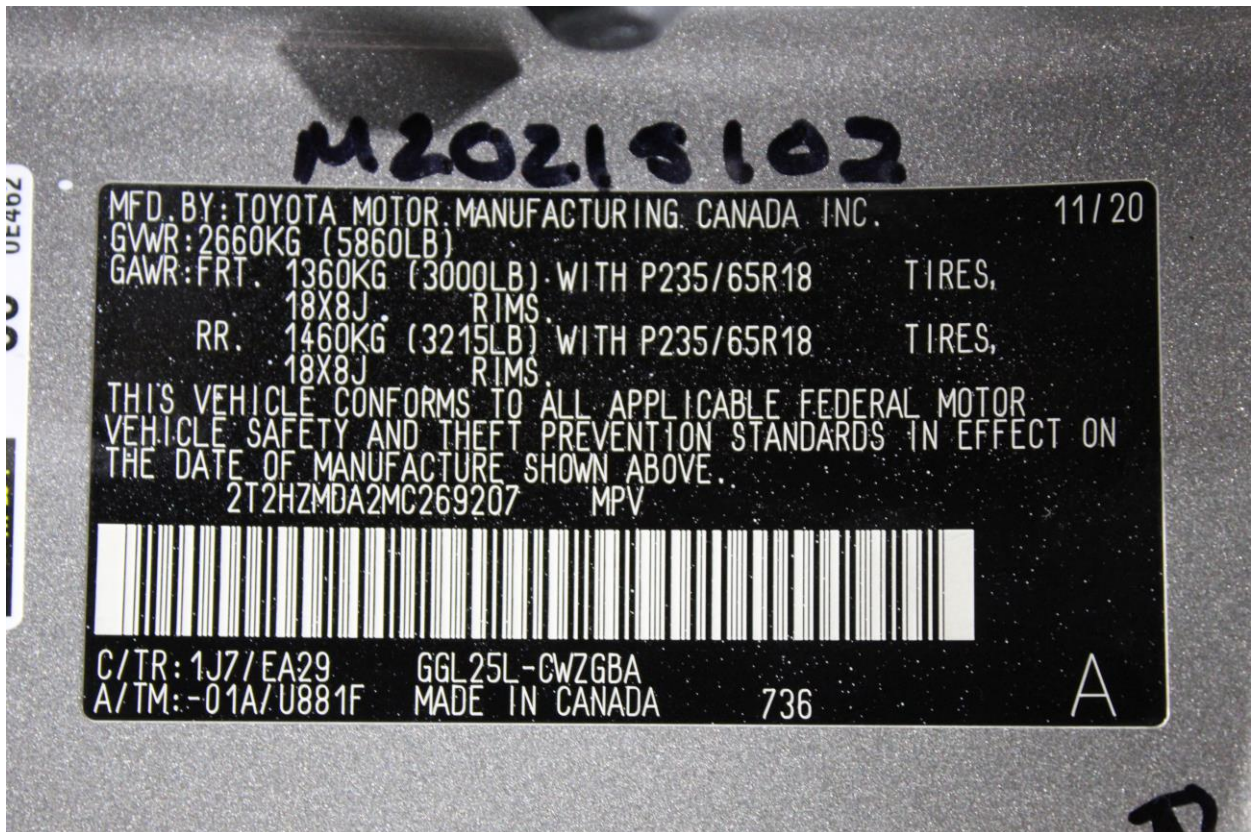


Figure A-4: Manufacturer's Label



Figure A-5: Tire Placard



Figure A-6: 2021 Lexus RX350 Frontal As Delivered



M20215102

Figure A-7: Left Rear 3-4 View, As Received



NCAP 56.3 KPH FRONTAL
2021 Lexus RX350
NHTSA No. M20215102
12/10/2020

PRE-TEST
NHTSA No. M20215102
NCAP Frontal
2021 Lexus RX350
12/10/2020

Figure A-8: Pre-Test Front View of Test Vehicle



Figure A-9: Post-Test Front View of Test Vehicle



Figure A-10: Pre-Test Left View of Test Vehicle



Figure A-11: Post-Test Left View of Test Vehicle



Figure A-12: Pre-Test Right View of Test Vehicle



Figure A-13: Post-Test Right View of Test Vehicle



Figure A-14: Pre-Test Right Front 3-4 View



Figure A-15: Post-Test Right Front 3-4 View



Figure A-16: Pre-Test Left Rear 3-4 View



Figure A-17: Post-Test Left Rear 3-4 View



Figure A-18: Pre-Test Windshield View



Figure A-19: Post-Test Windshield View



Figure A-20: Pre-Test Engine Compartment View

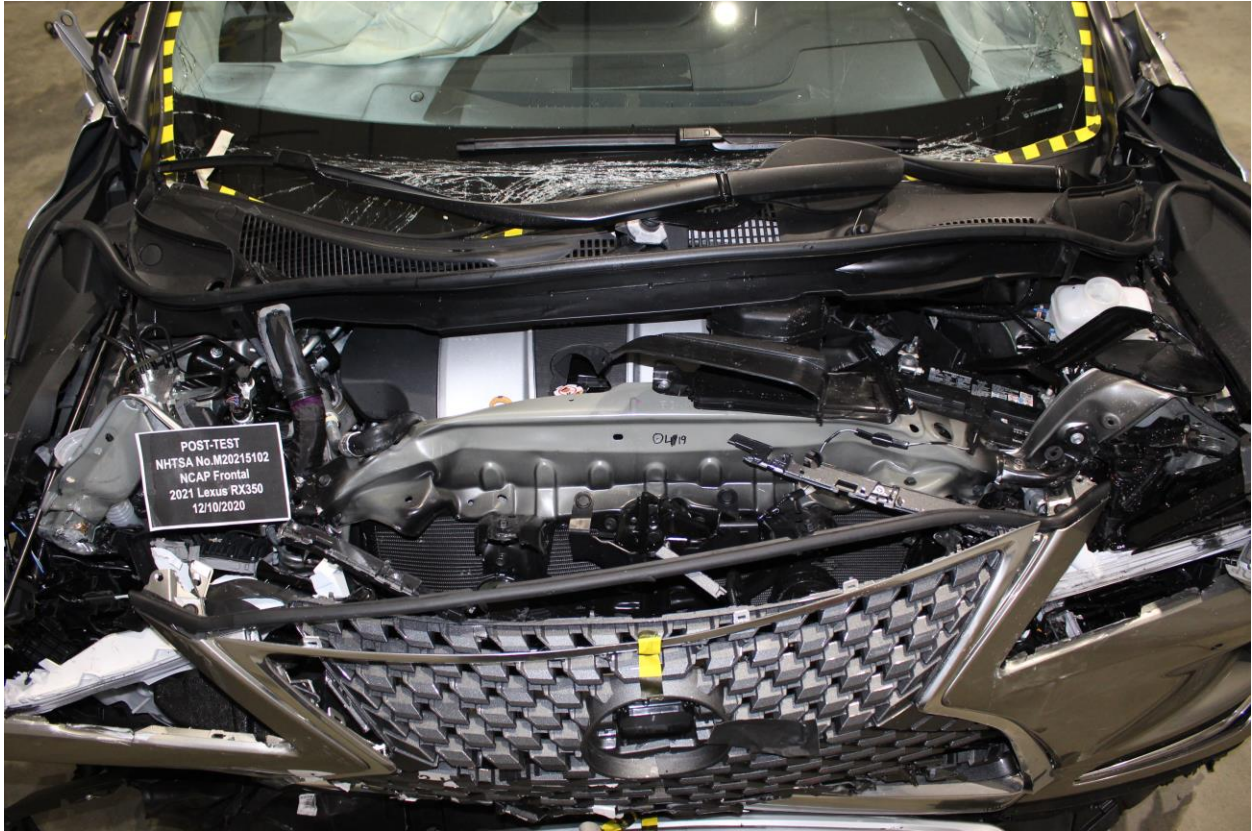


Figure A-21: Post-Test Engine Compartment View



Figure A-22: Pre-Test Fuel Filler Cap View



Figure A-23: Post-Test Fuel Filler Cap View

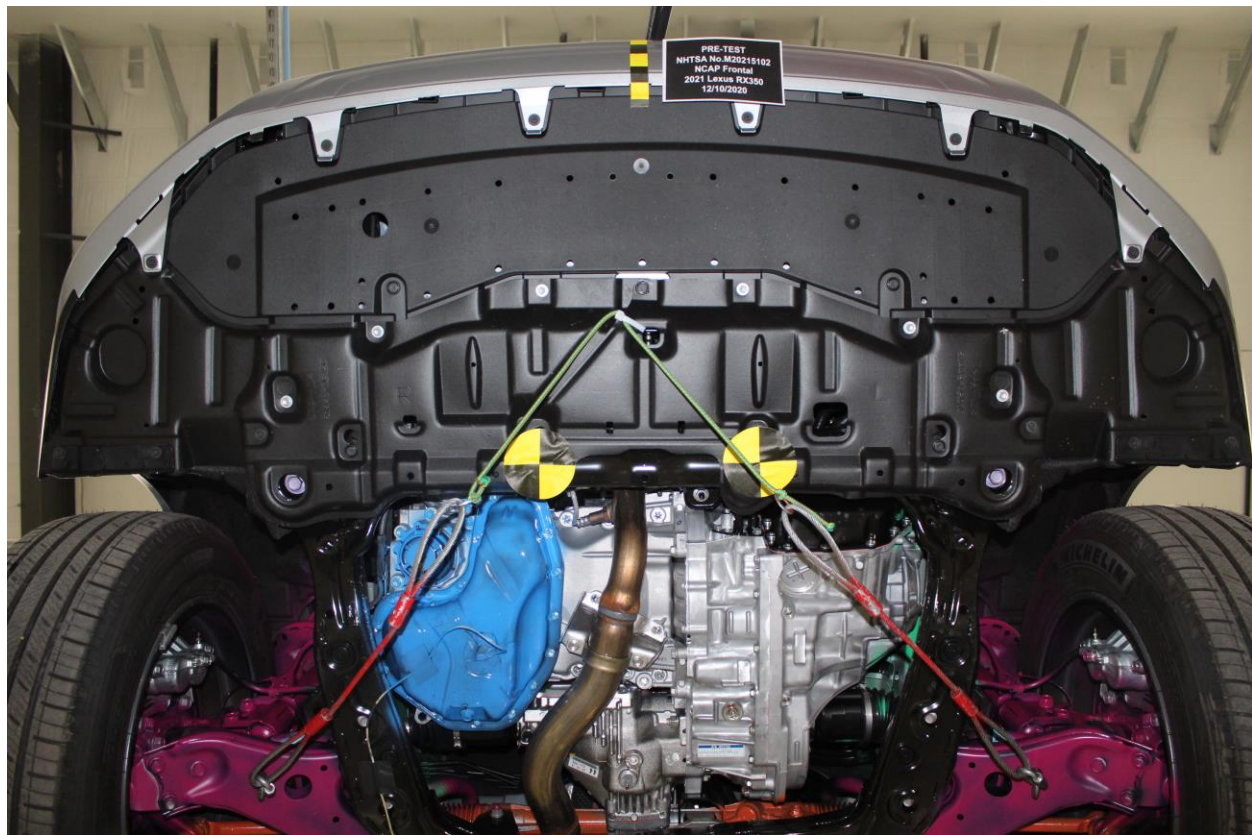


Figure A-24: Pre-Test Front Underbody View

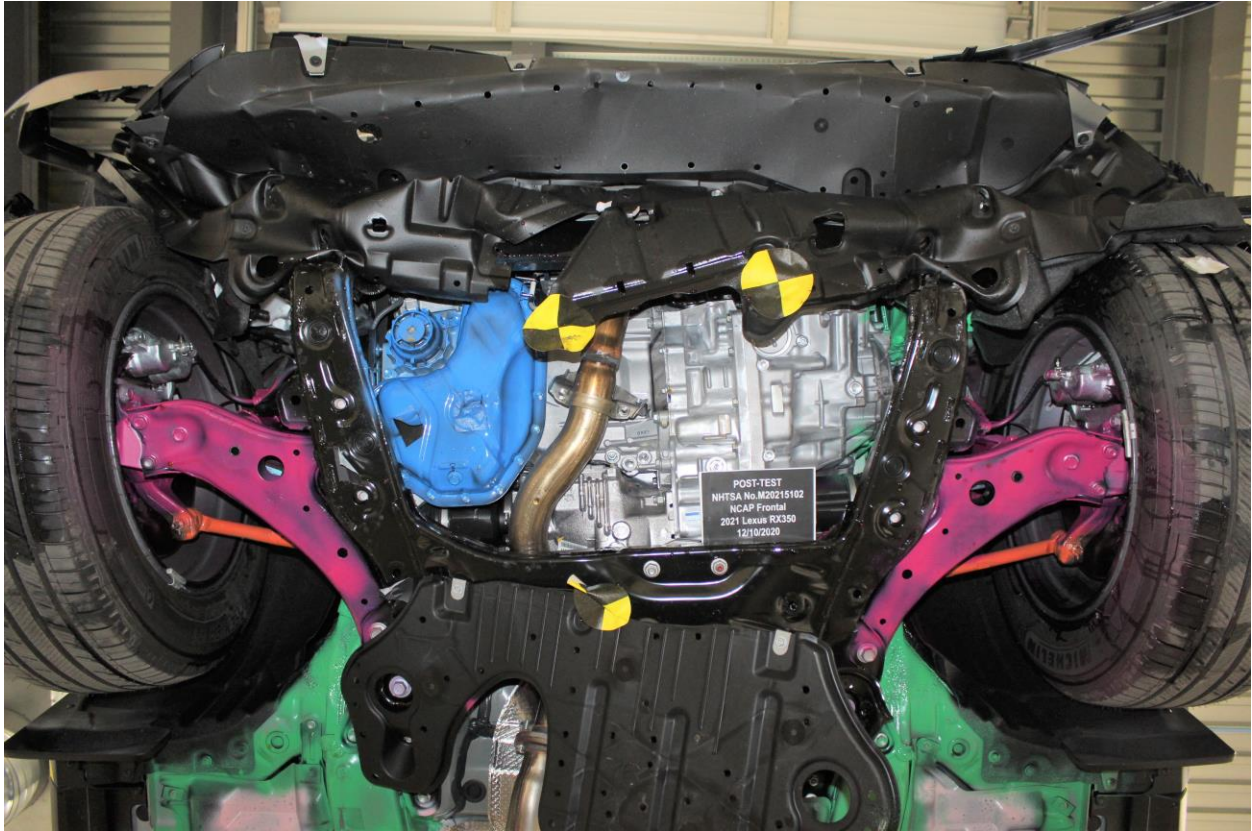


Figure A-25: Post-Test Front Underbody View



Figure A-26: Pre-Test Rear Underbody View

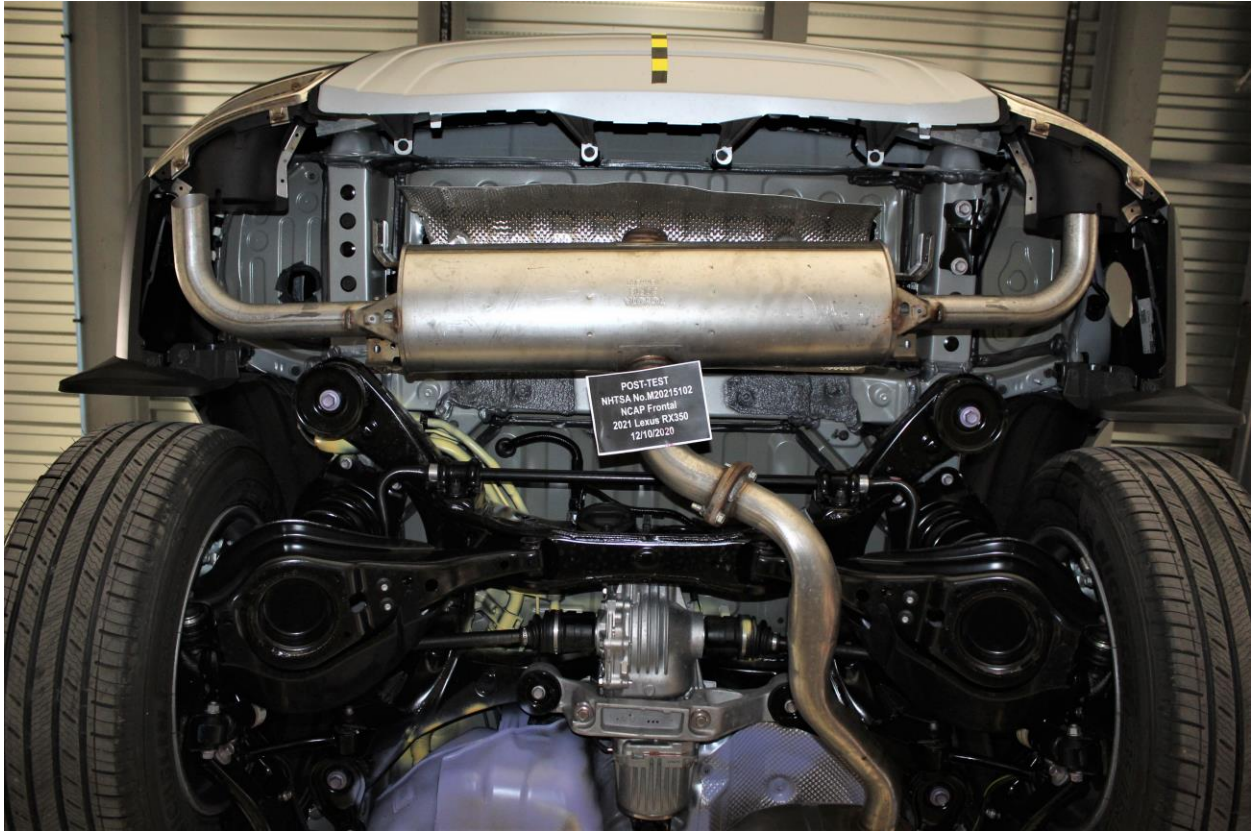


Figure A-27: Post-Test Rear Underbody View



Figure A-28: Pre-Test Dummy Cable Routing



Figure A-29: Post-Test Dummy Cable Routing

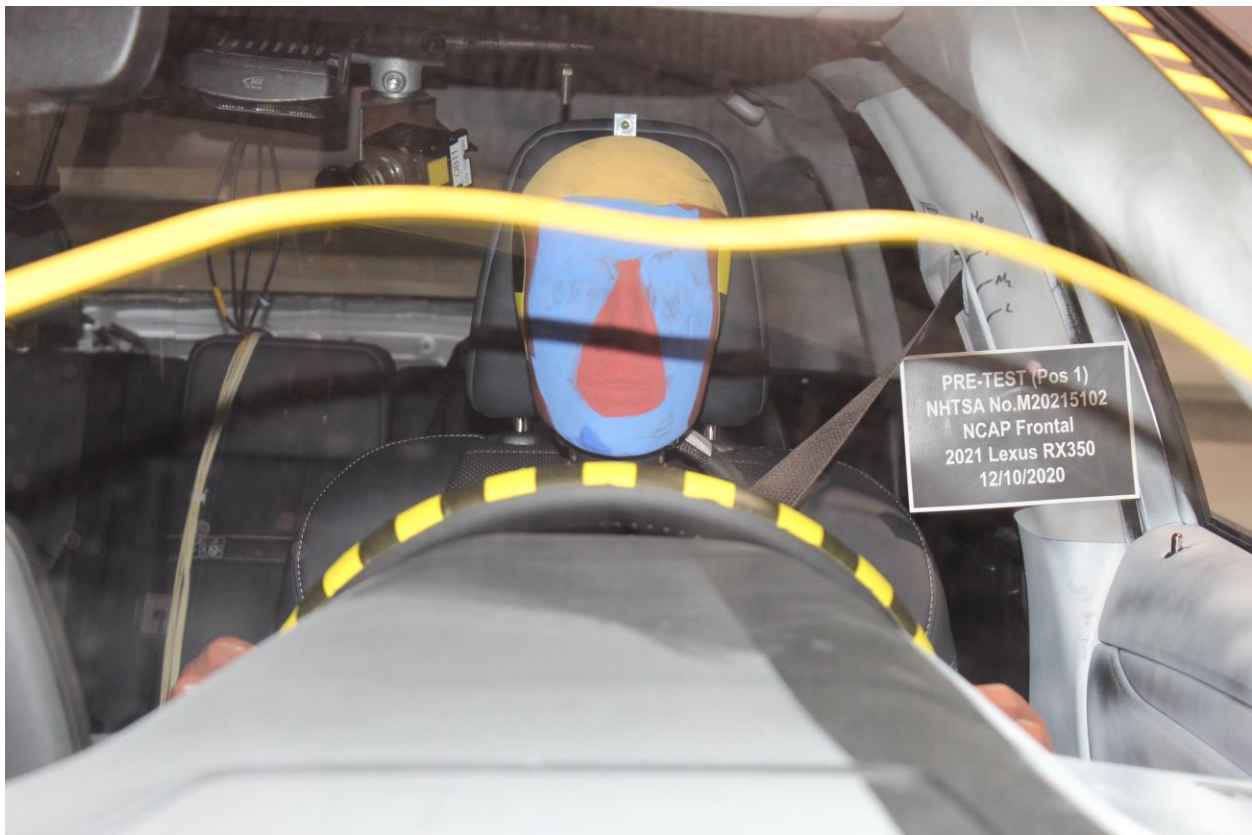


Figure A-30: Pre-Test Driver Dummy Front View



Figure A-31: Post-Test Driver Dummy Front View



Figure A-32: Pre-Test Driver Dummy Window View



Figure A-33: Post-Test Driver Dummy Window View



Figure A-34: Pre-Test Driver Dummy and Vehicle Interior View



Figure A-35: Post-Test Driver Dummy and Vehicle Interior View



Figure A-36: Pre-Test Driver's Seat Fore-Aft Markings

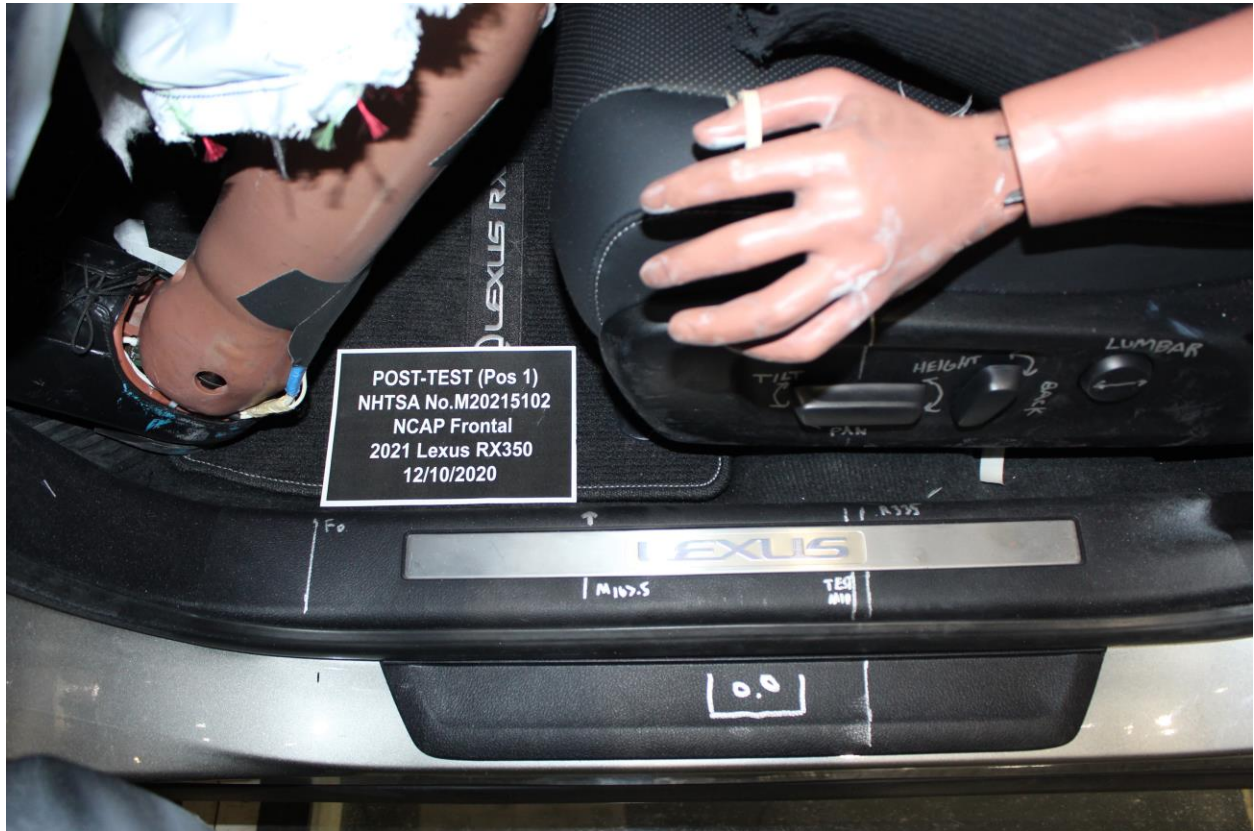


Figure A-37: Post-Test Driver's Seat Fore-Aft Markings



Figure A-38: Pre-Test View of Belt Anchorage for Driver Dummy



Figure A-39: Post-Test View of Belt Anchorage for Driver Dummy



Figure A-40: Pre-Test View of Belt Buckle and Latch Plate for Driver Dummy



Figure A-41: Post-Test View of Belt Buckle and Latch Plate for Driver Dummy



Figure A-42: Pre-Test Driver Dummy Feet



Figure A-43: Post-Test Driver Dummy Feet



Figure A-44: Pre-Test Driver's Side Knee Bolster



Figure A-45: Post-Test Driver's Side Knee Bolster



Figure A-46: Pre-Test Driver's Side Floorpan



Figure A-47: Post-Test Driver's Side Floorpan



Figure A-48: Post-Test Driver Dummy Face



Figure A-49: Post-Test Driver Dummy Contact With Airbag



Figure A-50: Post-Test Driver Dummy Contact With Headrest



Figure A-51: Pre-Test View of the Steering Wheel



Figure A-52: Post-Test View of the Steering Wheel



PRE-TEST (Pos 2)
NHTSA No. M20215102
NCAP Frontal
2021 Lexus RX350
12/10/2020

Figure A-53: Pre-Test Passenger Dummy Front View



POST-TEST (Pos 2)
NHTSA No. M20215102
NCAP Frontal
2021 Lexus RX350
12/10/2020

Figure A-54: Post-Test Passenger Dummy Front View



Figure A-55: Pre-Test Passenger Dummy Window View



Figure A-56: Post-Test Passenger Dummy Window View



Figure A-57: Pre-Test Passenger Dummy and Vehicle Interior View



Figure A-58: Post-Test Passenger Dummy and Vehicle Interior View



Figure A-59: Pre-Test Passenger's Seat Fore-Aft Markings



Figure A-60: Post-Test Passenger's Seat Fore-Aft Markings



Figure A-61: Pre-Test View of Belt Anchorage for Passenger Dummy



Figure A-62: Post-Test View of Belt Anchorage for Passenger Dummy



Figure A-63: Pre-Test View of Belt Buckle and Latch Plate for Passenger Dummy



Figure A-64: Post-Test View of Belt Buckle and Latch Plate for Passenger Dummy



Figure A-65: Pre-Test Passenger Dummy Feet



Figure A-66: Post-Test Passenger Dummy Feet



Figure A-67: Pre-Test Passenger's Side Knee Bolster



Figure A-68: Post-Test Passenger's Side Knee Bolster



Figure A-69: Pre-Test Passenger's Side Floorpan



Figure A-70: Post-Test Passenger's Side Floorpan



Figure A-71: Post-Test Passenger Dummy Face



Figure A-72: Post-Test Passenger Dummy Contact With Airbag



Figure A-73: Post-Test Passenger Dummy Contact With Headrest



Figure A-74: Photograph of Ballast Installed in Vehicle

Photo Not Applicable

Figure A-75: Post-Test Stoddard Solvent Spillage Location View, If Required



Figure A-76: Post-Test Speed Trap Read-Out



Figure A-77: Vehicle at 0° on Static Rollover Device



Figure A-78: Vehicle at 90° on Static Rollover Device



Figure A-79: Vehicle at 180° on Static Rollover Device



Figure A-80: Vehicle at 270° on Static Rollover Device



Figure A-81: Vehicle at 360° on Static Rollover Device



Figure A-82: 2021 Lexus RX350 Frontal Impact Event



LEXUS
EXPERIENCE AMAZING

DESCRIPTION **2021 / 9424A RX 350 AWD SUV**
 COLOR **ATOMIC SILVER**
 VIN **2T2HZMDA2MC269207**
 FINAL ASSEMBLY POINT **CAMBRIDGE, ONTARIO, CANADA**

Delivered by Truck to:
 NORTH TOWN LEXUS
 3845 SHERIDAN DRIVE
 AMHERST NY14228

STANDARD EQUIPMENT & INSTALLED OPTIONS

Powertrain

- 3.5 Liter 295 HP V8 Engine
- 8-Speed Automatic Transmission w/Paddle Shifters
- Drive Mode Select
- All Wheel Drive

Exterior

- 18" Aluminum Alloy Wheels
- Tire-Specific Pressure Monitoring System
- Bi-LED Headlamps
- LED Taillamps, Illuminated Door Handles, and Daytime Running Lights
- Rain Sensing Wipers

Safety

- 10 Airbags, Brake Assist, Smart Stop Technology
- Lexus Safety System+ 2.0: Lane Tracing Assist, Road Sign Assist, Pre-Collision System with Pedestrian Detection, Dynamic Radar Cruise Control, Lane Departure Alert with Steering Assist, and Intelligent High Beam Headlamps
- Lexus Enform Service Connect (Included for the First 10-Years of Ownership)
- Blind Spot Monitor and Rear Cross Traffic Alert

Multimedia

- Apple CarPlay/Android Auto/Amazon Alexa Compatible
- Lexus Enform Remote (3-Year Trial Included)
- Compatible w/Smartphone, Smartwatch or Devices Enabled with Google Assistant or Amazon Alexa
- SiriusXM Satellite Radio (3-month All Access Trial Included)
- 9 speaker Lexus Multimedia System/6 USB Ports
- 8" Touch Screen with Remote Touchpad
- Lexus Enform Wi-Fi (4GB / Three-Month Trial Included)
- 4.2" Color Multi-Information Display

Interior

- Auto Dual Zone Climate Control Sys w/Rear Vents
- Power NuLuxe-Trimmed Front Seats
- Power Tilt-and-Telescopic Steering Column
- Reclining/Sliding 40/20/40 Split Rear Seat
- Power Back Door
- Auto-Dimming Rear View Mirror with HomeLink Garage Door Opener
- First Aid Kit / Carpet Floor Mats

MANUFACTURER'S SUGGESTED RETAIL PRICE

- ** Wireless Charger 200.00
- ** Heated and Ventilated Front Seats 640.00
- ** Touch-Free Power Rear Door with Kick Sensor 150.00
- ** Premium Package Includes: Wood Trim, Driver Seat Memory, Exterior Mirror Memory, Steering Wheel Memory 480.00
- ** Intuitive Parking Assist and Rear Cross Traffic Braking 565.00
- ** Power Tilt/Slide Moonroof and Aluminum Roof Rails 1,350.00
- ** Leather Heated Steering Wheel 150.00
- ** All-Weather Floor Liners and Cargo Mat 285.00
- ** Mud Guards 170.00
- ** Cargo Mat/Cargo Net/Wheel Locks/Key Clove 325.00

\$ 46,470.00

EPA DOT Fuel Economy and Environment Gasoline Vehicle

Fuel Economy

22 **19** **26** **MPG**

combined city/hwy city highway

4.5 gallons per 100 miles

You spend \$ 1,750

more in fuel costs over 5 years compared to the average new vehicle.

Annual fuel cost \$1,850

Fuel Economy & Greenhouse Gas Rating (tailpipe only) Smog Rating (tailpipe only)

1 **4** **10** **1** **5** **10**

Best Best

This vehicle emits 409 grams CO2 per mile. The best emits 0 grams per mile (tailpipe only). Producing and distributing fuel also create emissions, learn more at fueleconomy.gov.

Actual results will vary for many reasons, including driving conditions and how you drive and maintain your vehicle. The average new vehicle gets 22 MPG and costs \$2,050 to fuel over 5 years. Cost estimates are based on 15,000 miles per year at \$2.70 per gallon. MPG is miles per gasoline gallon equivalent. Vehicle emissions are a significant cause of climate change and smog.

fueleconomy.gov
Calculate personalized estimates and compare vehicles

GOVERNMENT 5-STAR SAFETY RATINGS

Overall Vehicle Score Not Rated
Based on the combined ratings of frontal, side and rollover. Should ONLY be compared to other vehicles of similar size and weight.

Frontal Crash Driver Passenger **Not Rated Not Rated**
Based on the risk of injury in a frontal impact. Should ONLY be compared to other vehicles of similar size and weight.

Side Crash Front seat **★★★★★**
Rear seat **★★★★★**
Based on the risk of injury in a side impact.

Rollover **★★★★★**
Based on the risk of rollover in a single-vehicle crash.

Star ratings range from 1 to 5 stars (★★★★★) with 5 being the highest.
Source: National Highway Traffic Safety Administration (NHTSA)
www.safercar.gov or 1-888-327-4236

SUB-TOTAL **\$ 50,785.00**

DELIVERY, PROCESSING AND HANDLING FEE **1,025.00**

TOTAL \$ 51,810.00

APPLICABLE FEDERAL TAXES NOT INCLUDED

Manufacturer's suggested retail price includes manufacturer's recommended pre-delivery service. License and title fees, state, local and applicable federal taxes, and dealer installed options and accessories are not included in the manufacturer's suggested retail price.

LEXUS NEW VEHICLE LIMITED WARRANTY

- * 4YR / 50,000 mile basic coverage
- * 4YR / 70,000 mile powertrain coverage
- * 4YR / Unlimited mile corrosion performance warranty

See your Warranty and Services Guide for details.

LEXUS IS PLEASED TO OFFER THE FOLLOWING OWNER SUPPORT PACKAGE WITH EACH NEW LEXUS

- 24-hour, 888 key-in roadside assistance plan
- Complimentary 1st and 2nd scheduled maintenance services
- Lock-in for emergency breakdown 100 miles from home

An extended service contract may be available for this vehicle. Ask dealer for details.

745 BUF



Figure A-83: Monroney Label Photograph

APPENDIX B
VEHICLE & DUMMY RESPONSE DATA TRACES

Table of Data Plots





No.	Description	Page
Plot 1	Driver Head X Acceleration vs. Time Primary	B-5
Plot 2	Driver Head Y Acceleration vs. Time Primary	B-5
Plot 3	Driver Head Z Acceleration vs. Time Primary	B-5
Plot 4	Driver Head Resultant Acceleration vs. Time Primary	B-5
Plot 5	Driver Chest X Deflection vs. Time	B-6
Plot 6	Driver Chest X Acceleration vs. Time Primary	B-6
Plot 7	Driver Chest Y Acceleration vs. Time Primary	B-6
Plot 8	Driver Chest Z Acceleration vs. Time Primary	B-6
Plot 9	Driver Chest Resultant Acceleration vs. Time Primary	B-7
Plot 10	Driver Upper Neck Force X vs. Time Primary	B-7
Plot 11	Driver Upper Neck Force Z vs. Time Primary	B-7
Plot 12	Driver Upper Neck Moment Y vs. Time Primary	B-7
Plot 13	Driver Nij vs. Time Primary	B-8
Plot 14	Driver Left Femur Force vs. Time	B-8
Plot 15	Driver Right Femur Force vs. Time	B-8
Plot 16	Passenger Head X Acceleration vs. Time Primary	B-8
Plot 17	Passenger Head Y Acceleration vs. Time Primary	B-9
Plot 18	Passenger Head Z Acceleration vs. Time Primary	B-9
Plot 19	Passenger Head Resultant Acceleration vs. Time Primary	B-9
Plot 20	Passenger Chest X Deflection vs. Time	B-9
Plot 21	Passenger Chest X Acceleration vs. Time Primary	B-10
Plot 22	Passenger Chest Y Acceleration vs. Time Primary	B-10
Plot 23	Passenger Chest Z Acceleration vs. Time Primary	B-10
Plot 24	Passenger Chest Resultant Acceleration vs. Time Primary	B-10
Plot 25	Passenger Upper Neck Force X vs. Time Primary	B-11
Plot 26	Passenger Upper Neck Force Z vs. Time Primary	B-11
Plot 27	Passenger Upper Neck Moment Y vs. Time Primary	B-11
Plot 28	Passenger Nij vs. Time Primary	B-11
Plot 29	Passenger Left Femur Force vs. Time	B-12
Plot 30	Passenger Right Femur Force vs. Time	B-12





The following additional dummy and vehicle response data can be found in the R&D section of the NHTSA website at www.NHTSA.gov





Driver Head X Acceleration Redundant
 Driver Head Y Acceleration Redundant
 Driver Head Z Acceleration Redundant
 Driver Upper Neck Force Y
 Driver Upper Neck Moment X
 Driver Upper Neck Moment Z
 Driver Chest X Acceleration Redundant
 Driver Chest Y Acceleration Redundant
 Driver Chest Z Acceleration Redundant
 Driver Pelvis X
 Driver Pelvis Y
 Driver Pelvis Z
 Driver Left Femur Redundant
 Driver Right Femur Redundant
 Driver Left Upper Tibia Moment X
 Driver Left Upper Tibia Moment Y





Driver Left Upper Tibia Force Z
Driver Left Lower Tibia Moment X
Driver Left Lower Tibia Moment Y
Driver Left Lower Tibia Force Z
Driver Right Upper Tibia Moment X
Driver Right Upper Tibia Moment Y
Driver Right Upper Tibia Force Z
Driver Right Lower Tibia Moment X
Driver Right Lower Tibia Moment Y
Driver Right Lower Tibia Force Z
Driver Left Foot Fore Z
Driver Left Foot Aft X
Driver Left Foot Aft Z
Driver Right Foot Fore Z
Driver Right Foot Aft X
Driver Right Foot Aft Z
Driver Shoulder Belt Force
Driver Lap Belt Force
Driver Head Angular Velocity X
Driver Head Angular Velocity Y
Driver Head Angular Velocity Z
Passenger Head X Acceleration Redundant
Passenger Head Y Acceleration Redundant
Passenger Head Z Acceleration Redundant
Passenger Upper Neck Force X
Passenger Upper Neck Force Z
Passenger Upper Neck Moment Y
Passenger Chest X Acceleration Redundant
Passenger Chest Y Acceleration Redundant
Passenger Chest Z Acceleration Redundant
Passenger Pelvis X
Passenger Pelvis Y
Passenger Pelvis Z
Passenger Left Femur Redundant
Passenger Right Femur Redundant
Passenger Left Upper Tibia Moment X
Passenger Left Upper Tibia Moment Y
Passenger Left Upper Tibia Force Z
Passenger Left Lower Tibia Moment X
Passenger Left Lower Tibia Moment Y
Passenger Left Lower Tibia Force Z
Passenger Right Upper Tibia Moment X
Passenger Right Upper Tibia Moment Y
Passenger Right Upper Tibia Force Z
Passenger Right Lower Tibia Moment X
Passenger Right Lower Tibia Moment Y
Passenger Right Lower Tibia Force Z
Passenger Left Foot Fore Z
Passenger Left Foot Aft X
Passenger Left Foot Aft Z





Passenger Right Foot Fore Z
Passenger Right Foot Aft X
Passenger Right Foot Aft Z
Passenger Shoulder Belt Force
Passenger Lap Belt Force
Passenger Head Angular Velocity X
Passenger Head Angular Velocity Y
Passenger Head Angular Velocity Z
Left Rear Seat Crossmember X
Left Rear Seat Crossmember Z
Right Rear Seat Crossmember X
Right Rear Seat Crossmember Z
Left Rear Seat Crossmember X Redundant
Right Rear Seat Crossmember X Redundant
Vehicle Engine Top X
Vehicle Engine Bottom X
Load Cell Barrier Forces and Moments

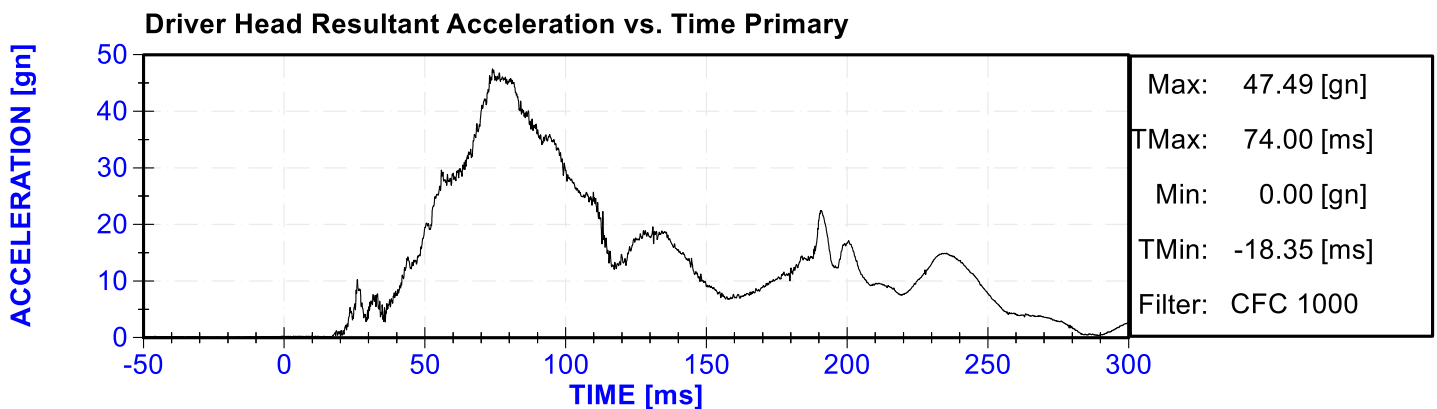
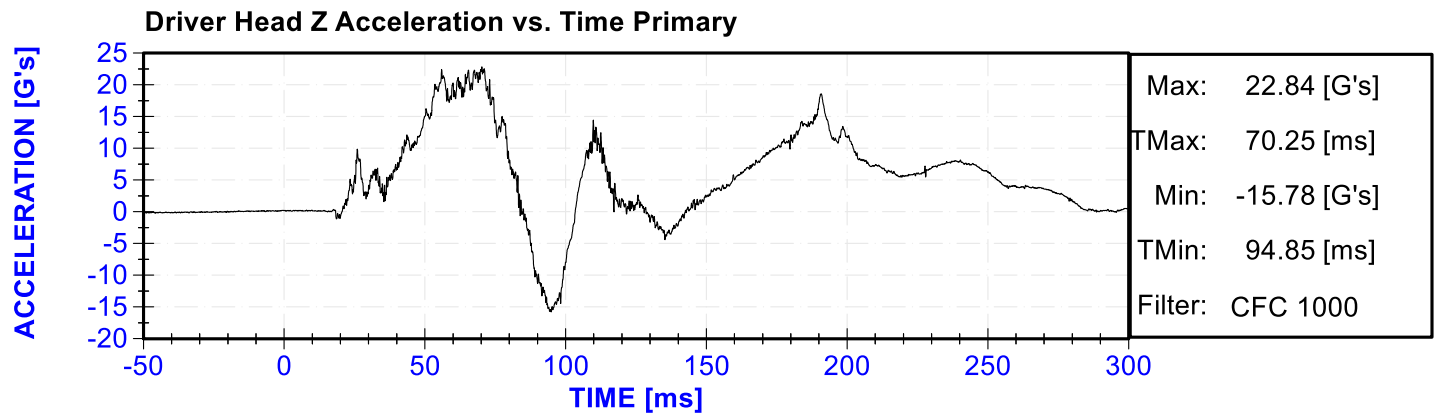
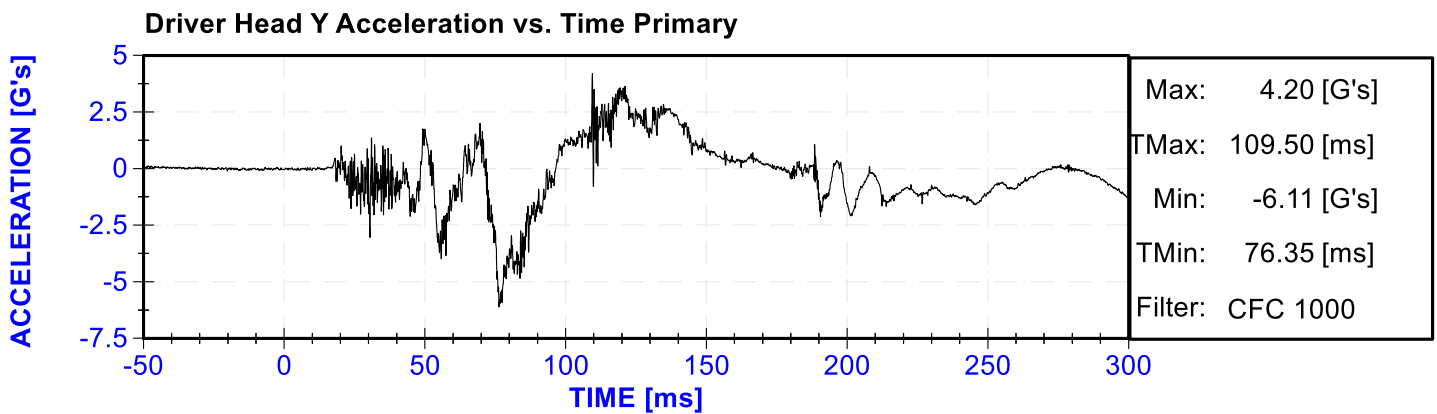
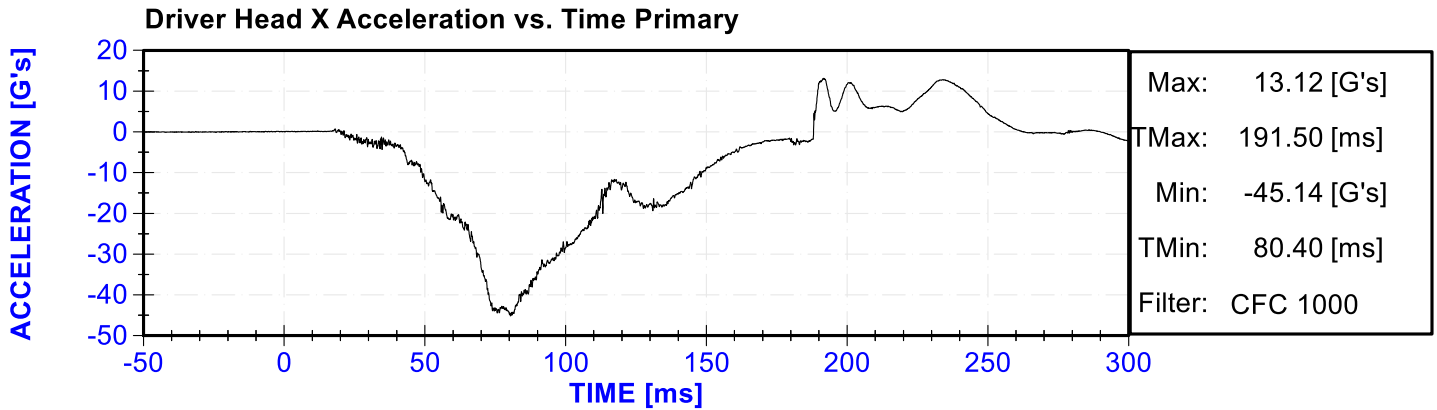


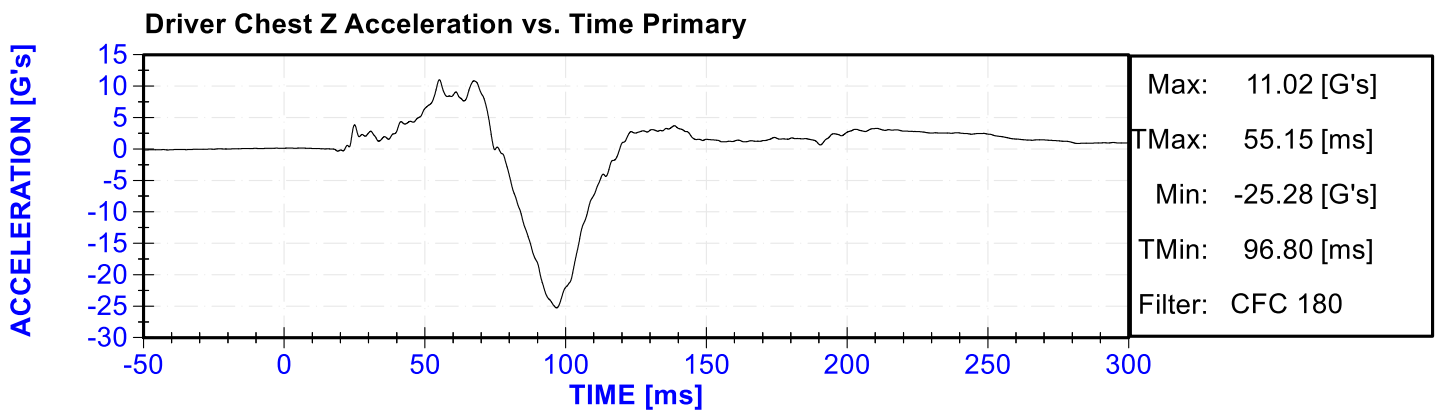
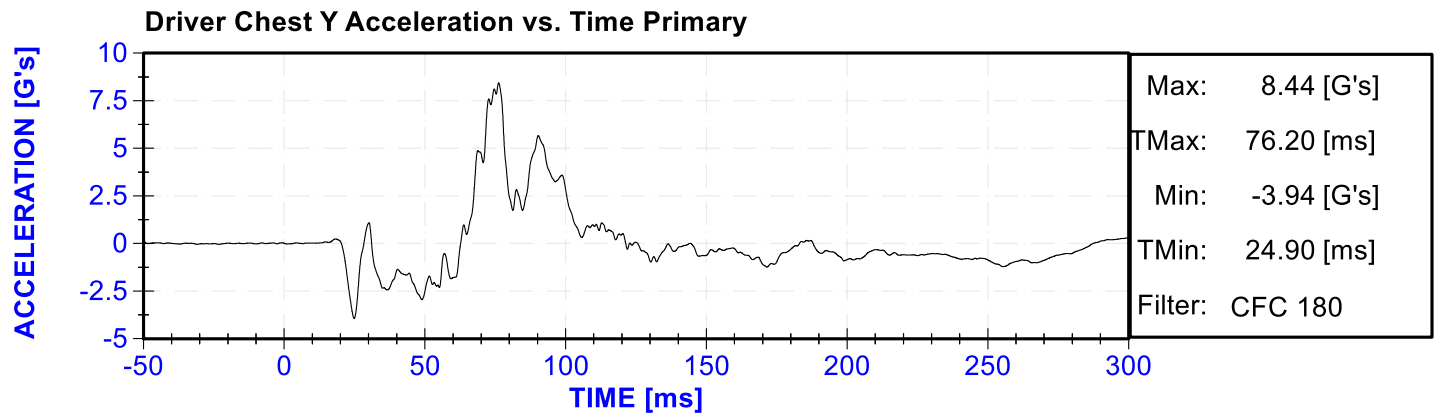
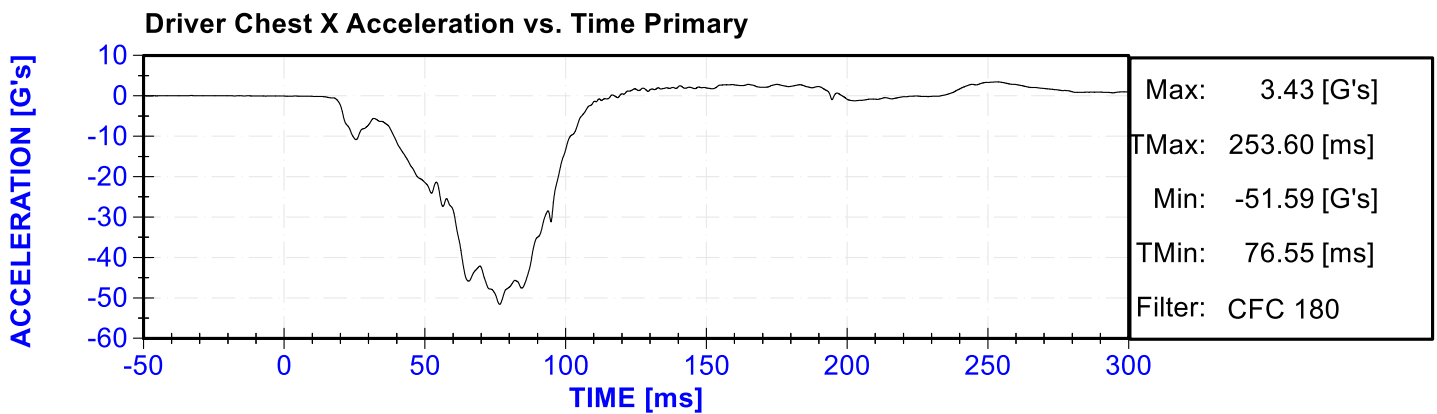
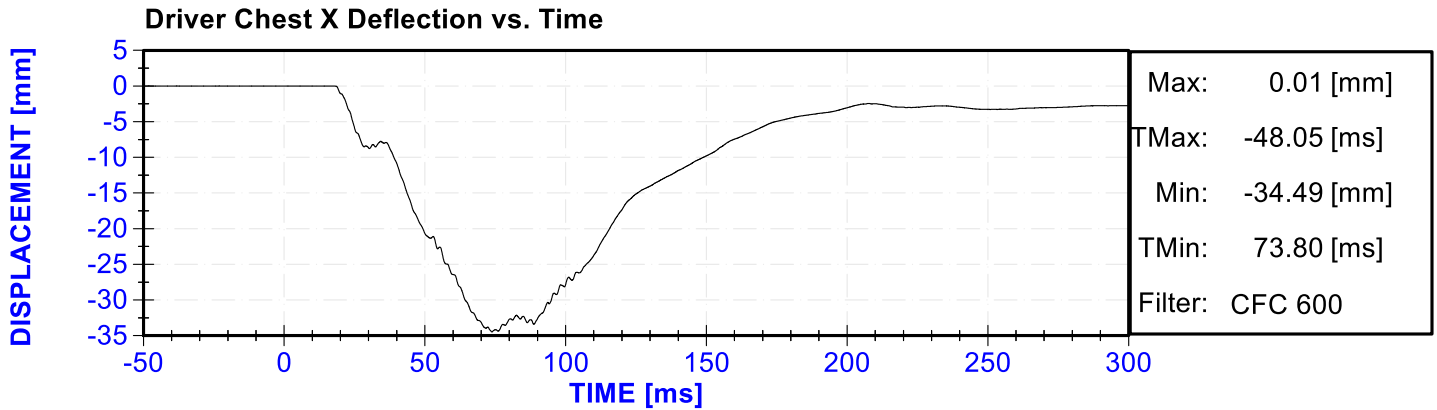


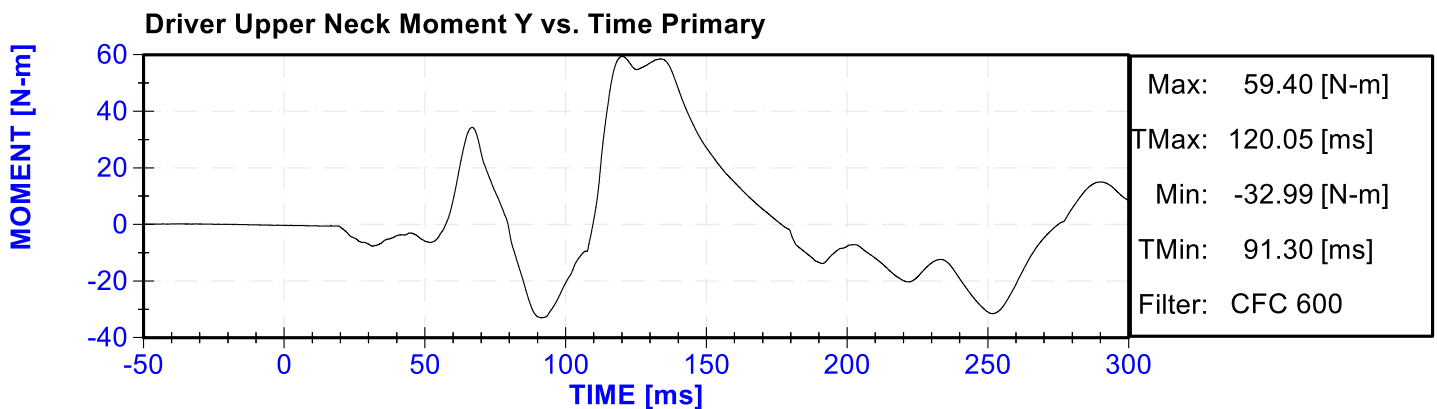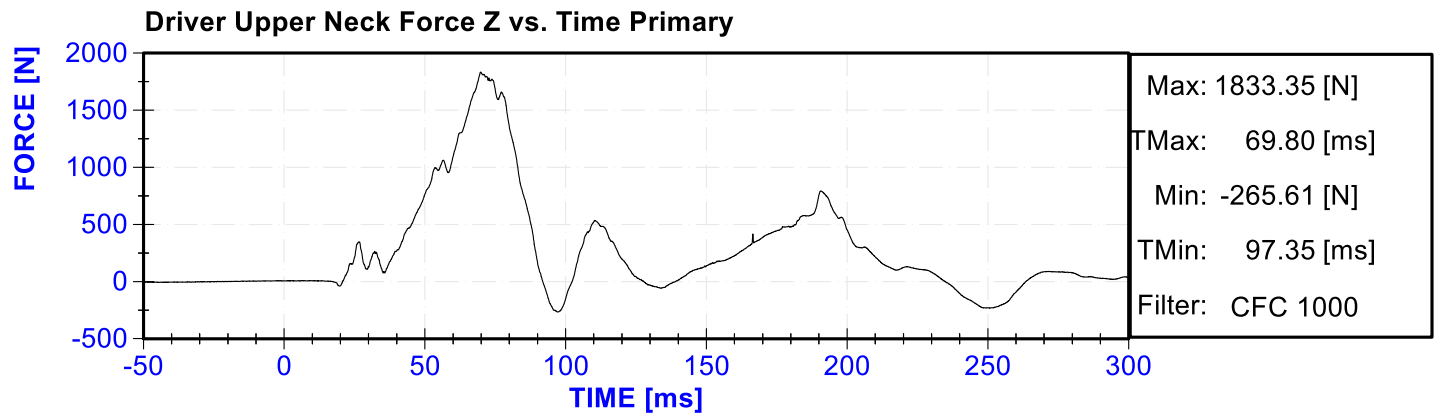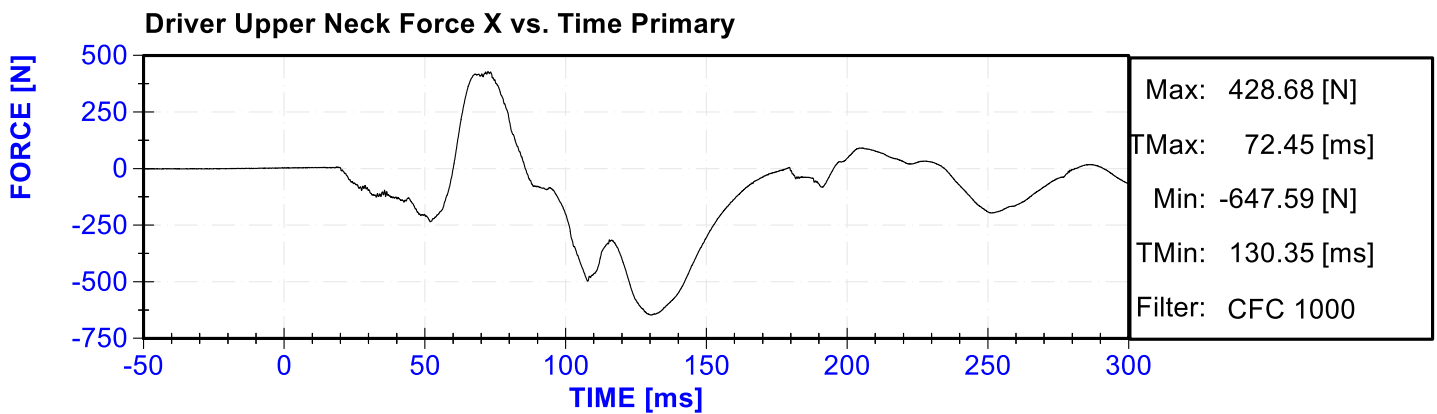
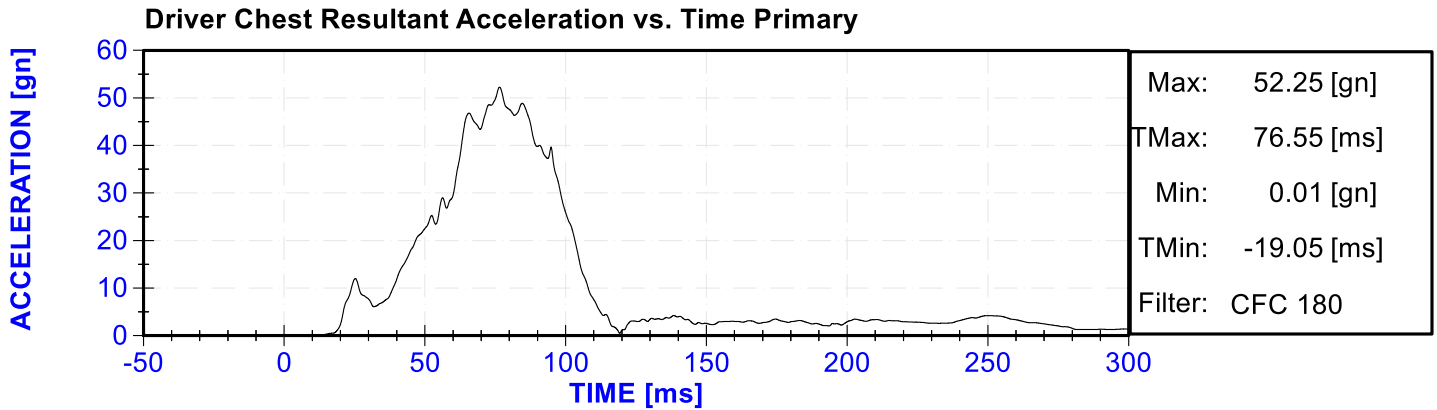


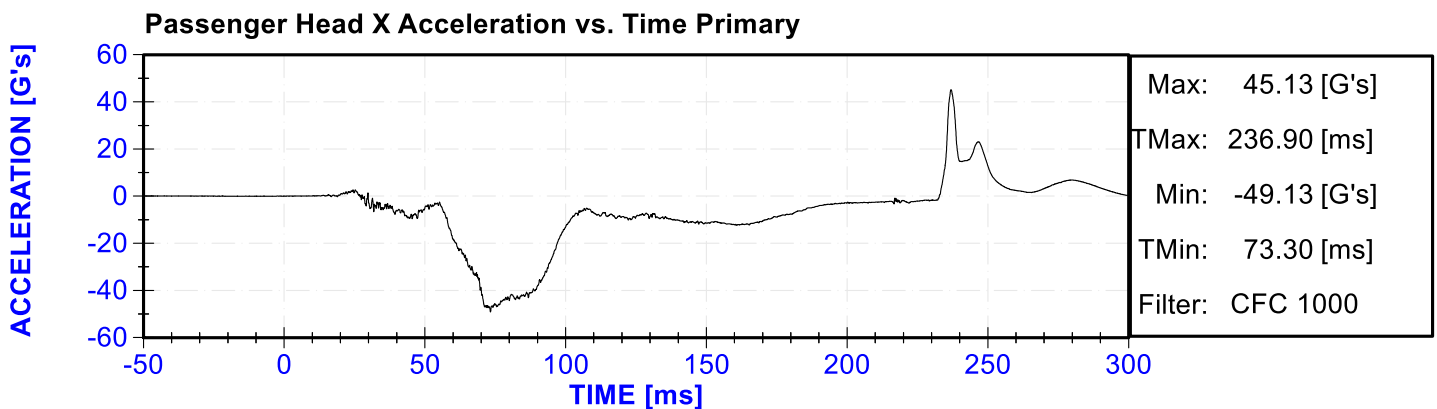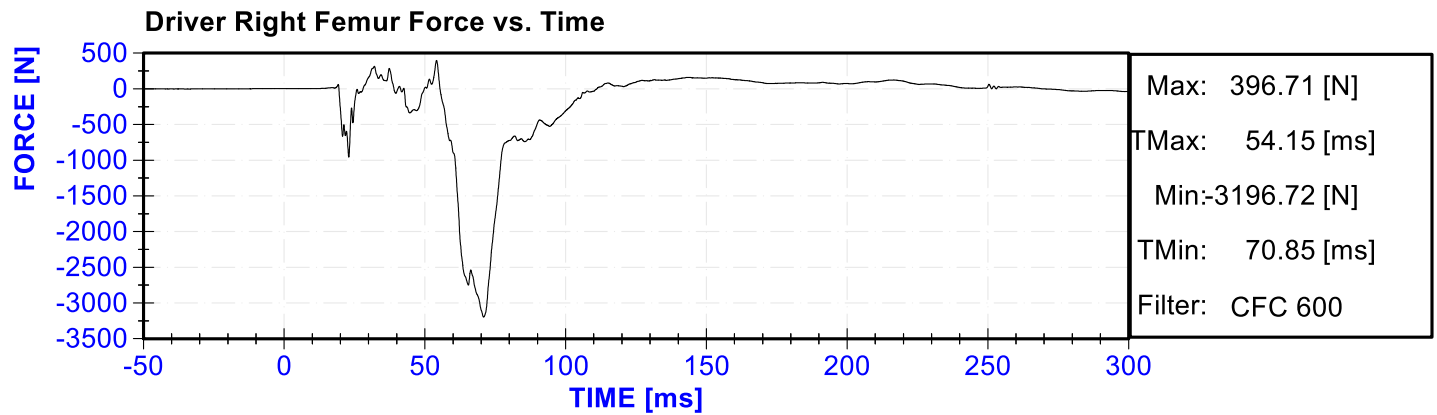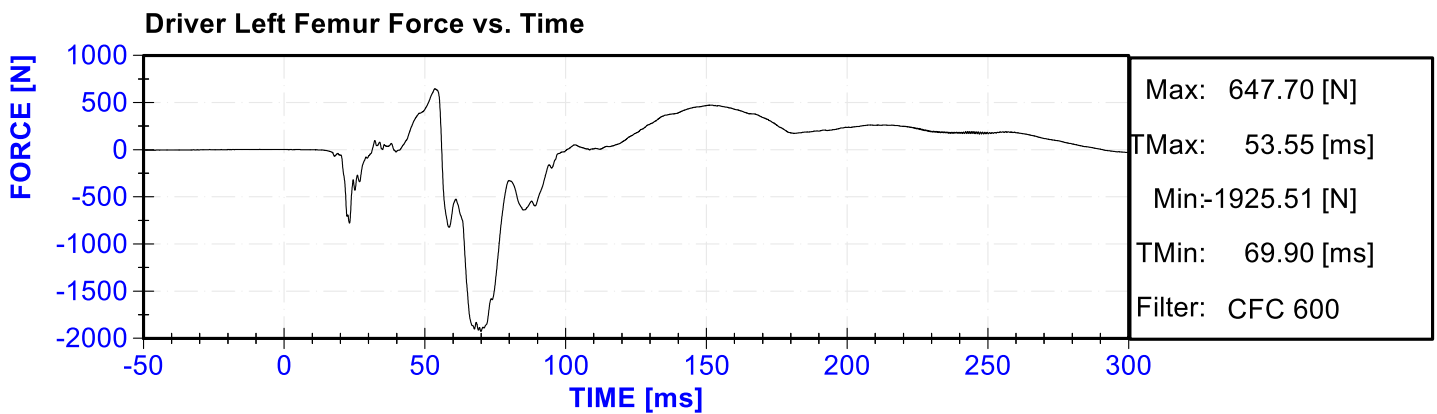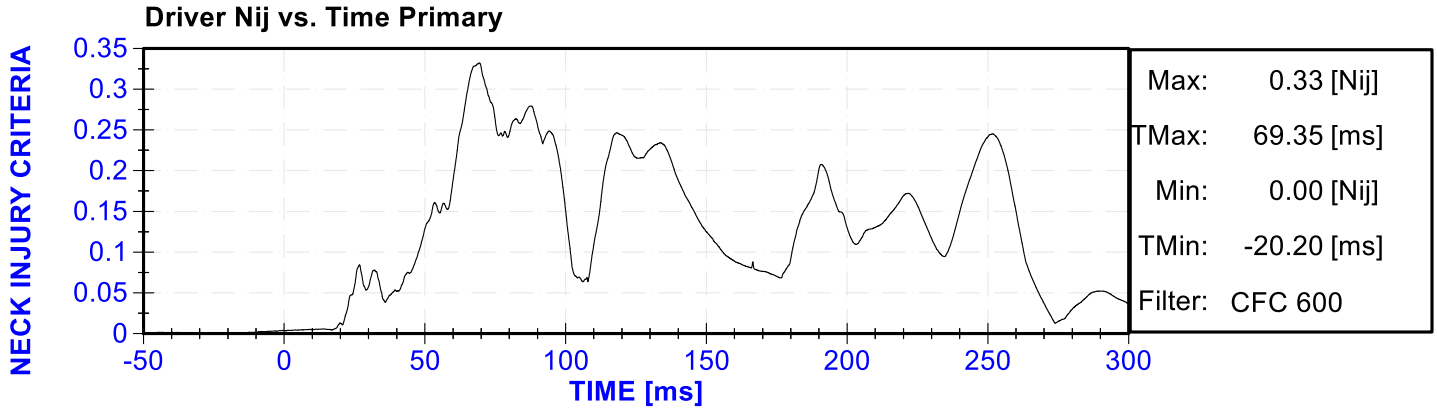

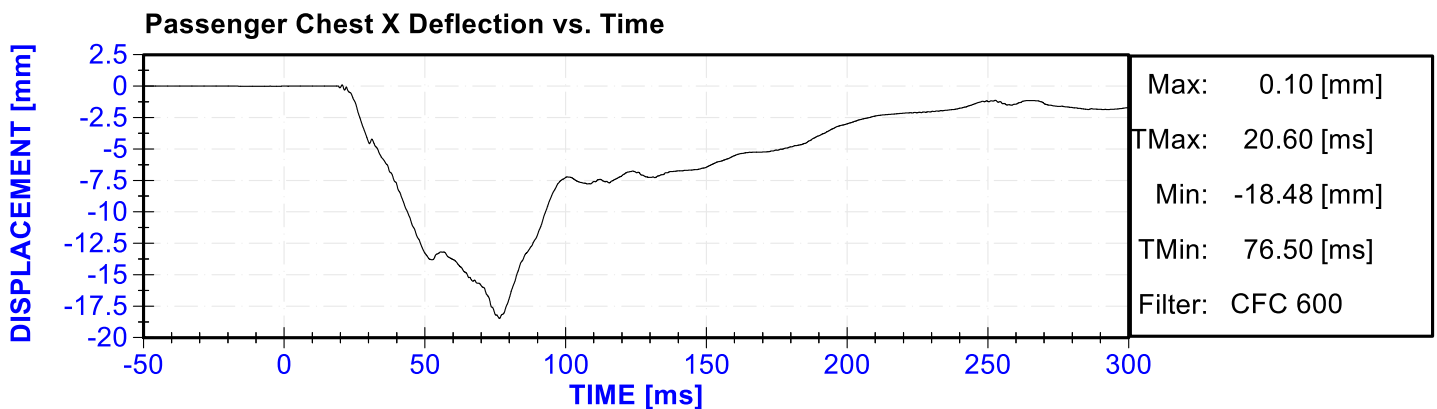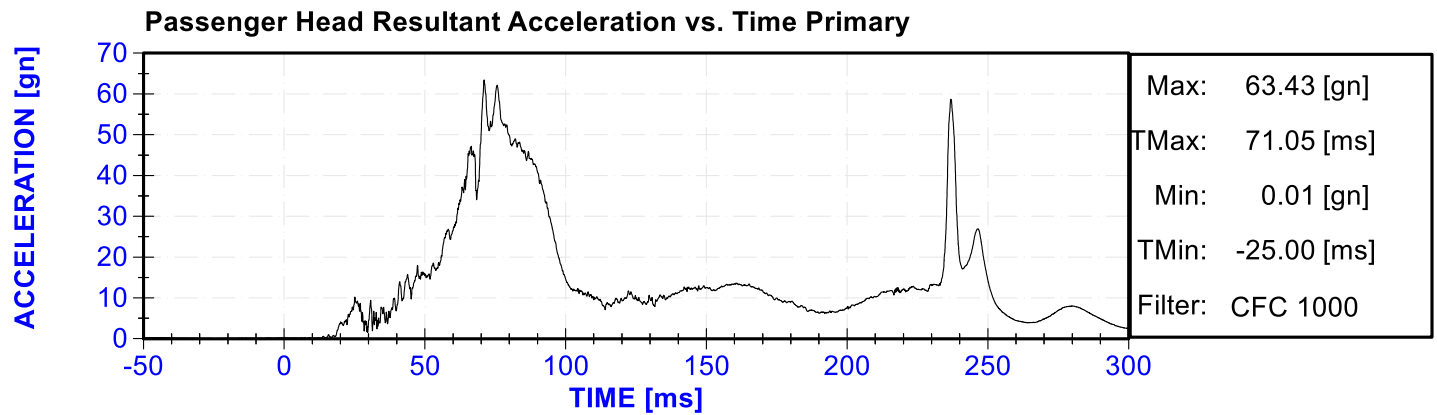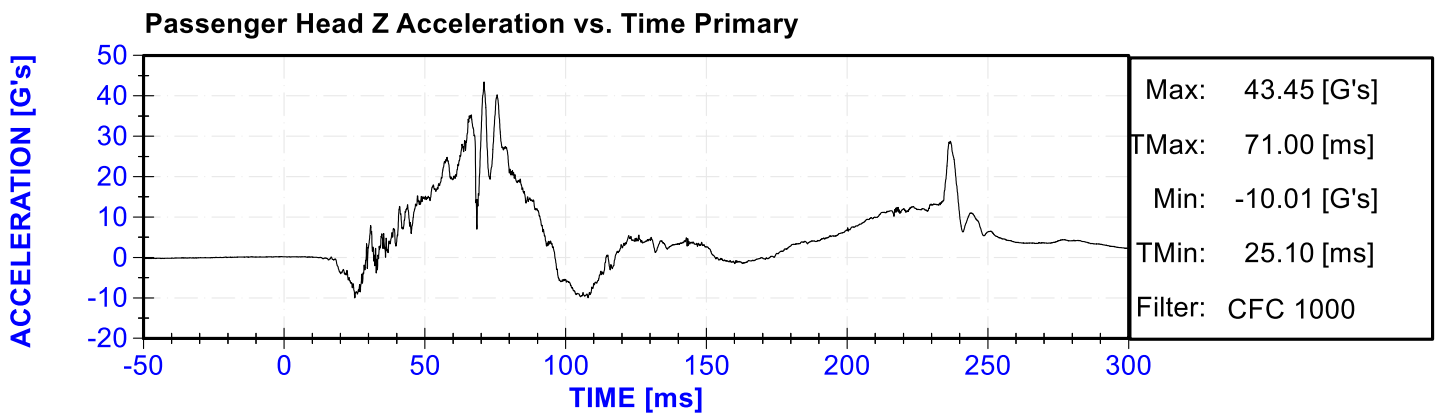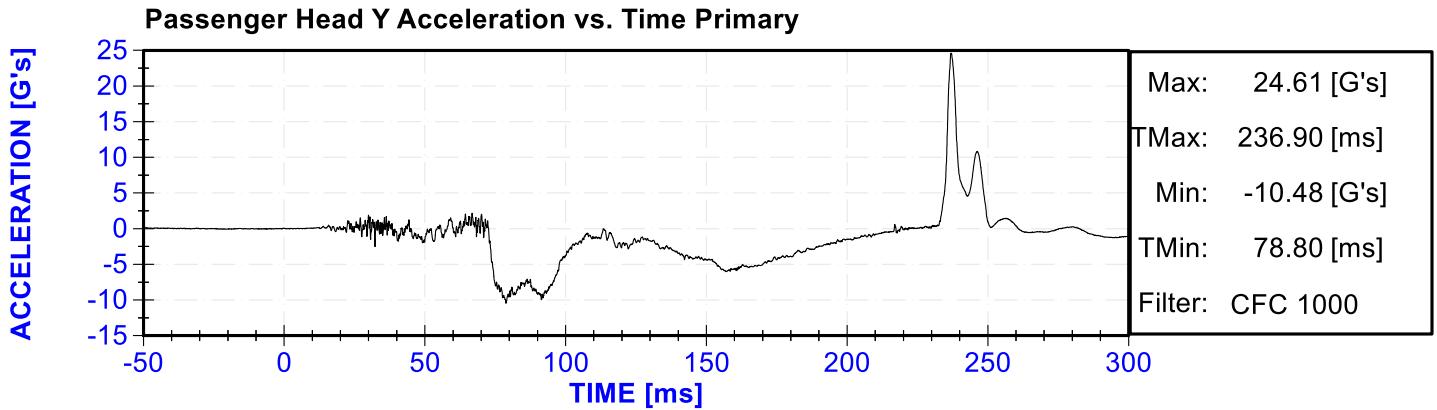

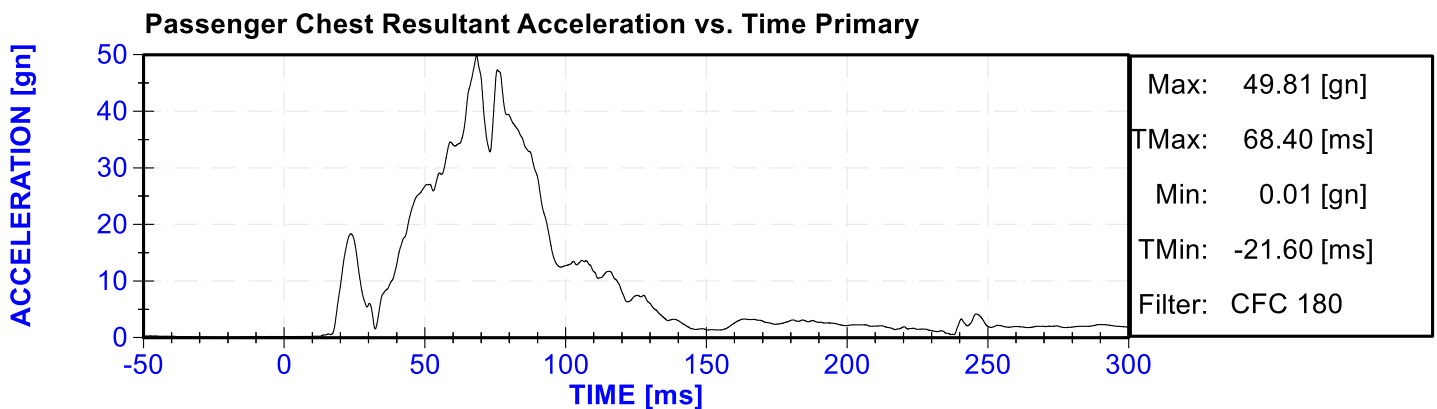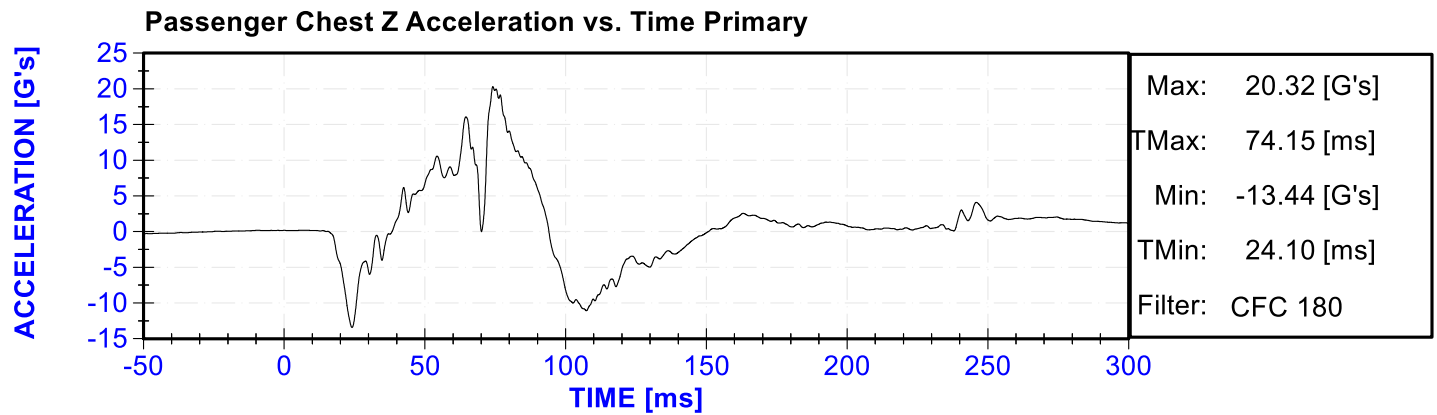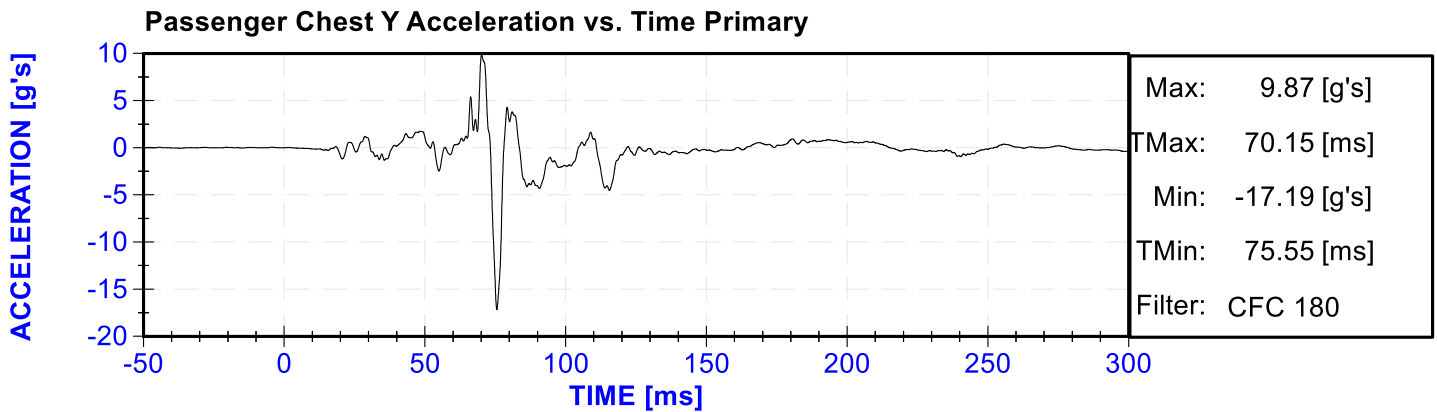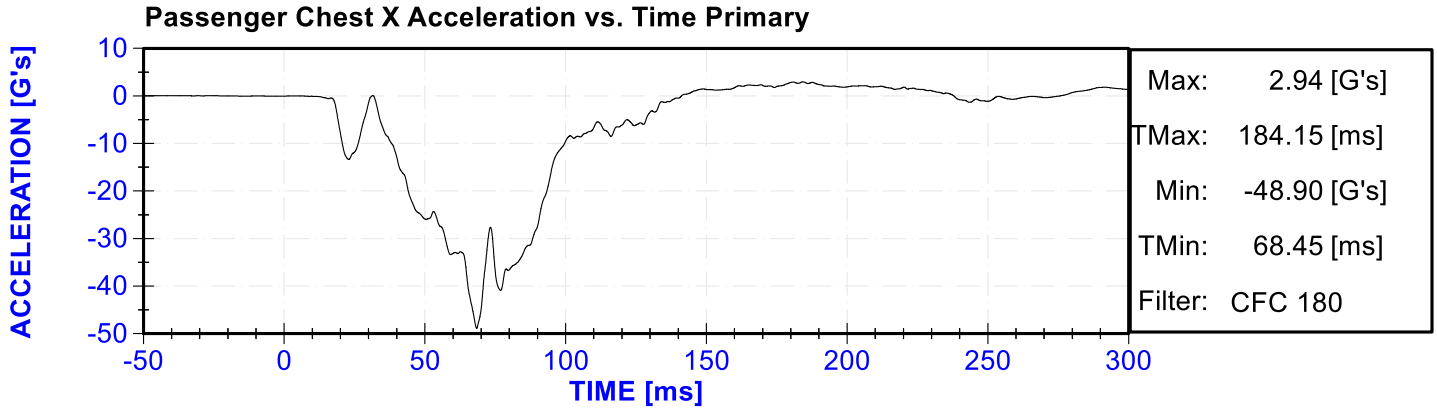

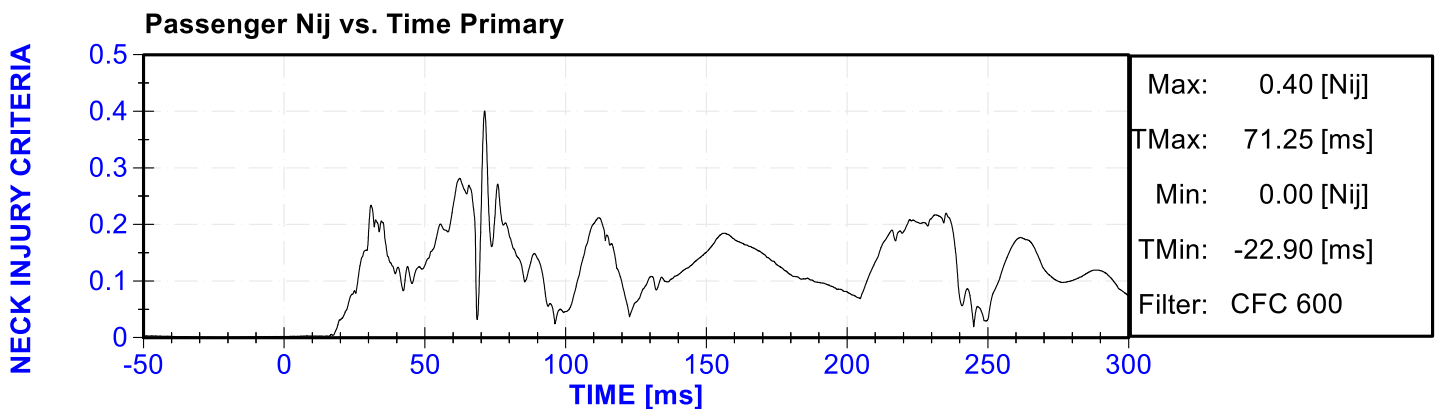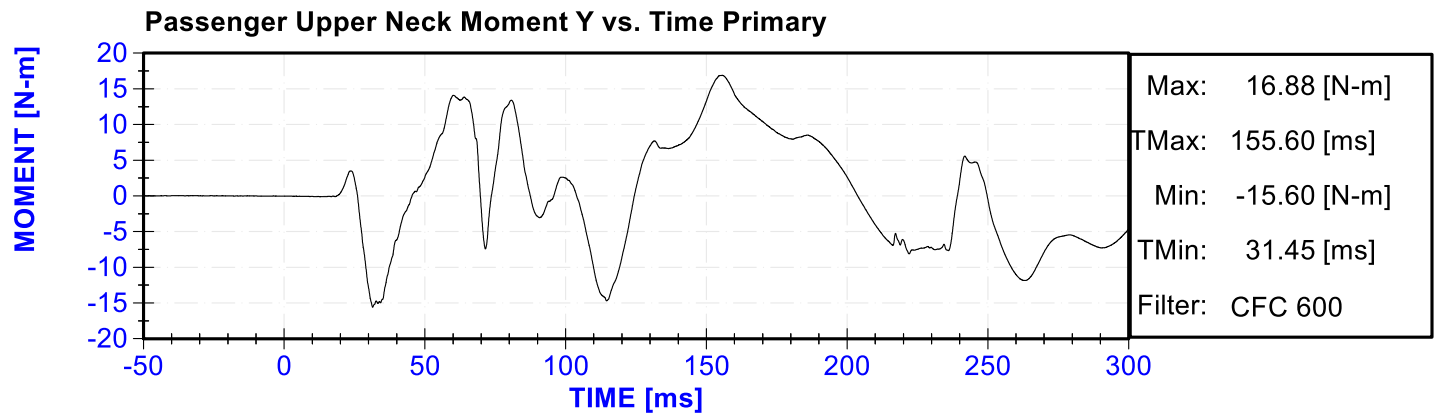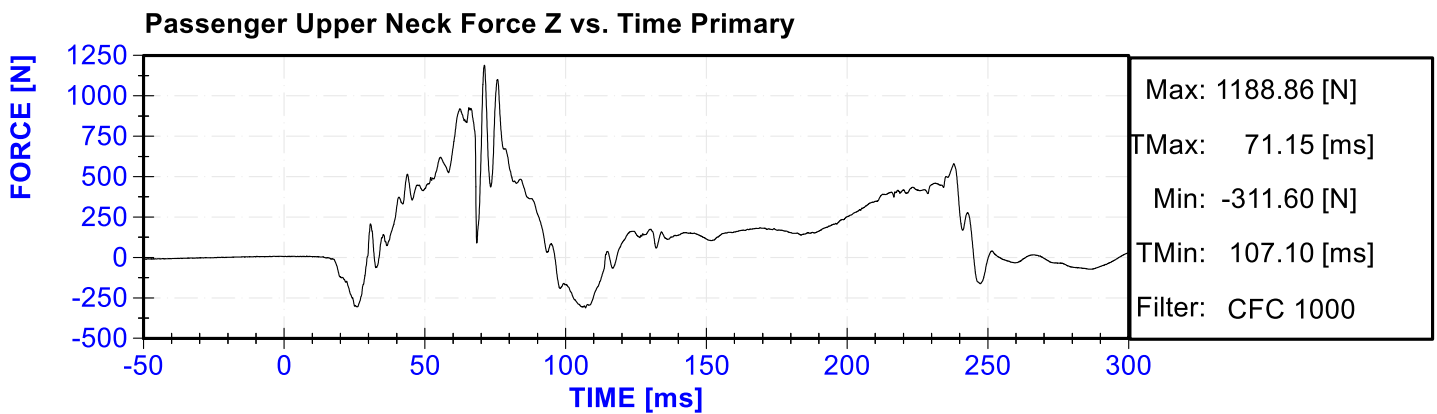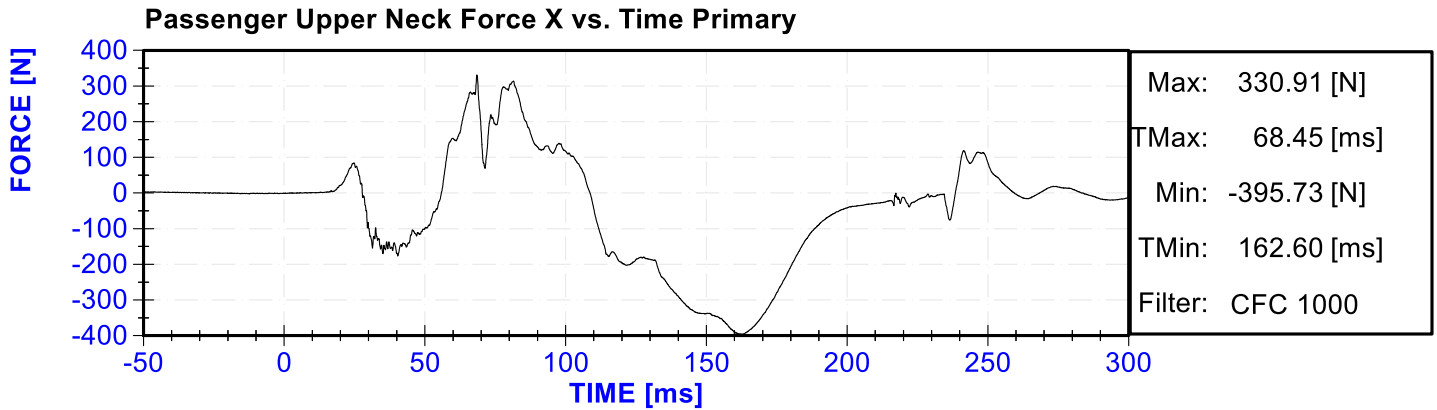

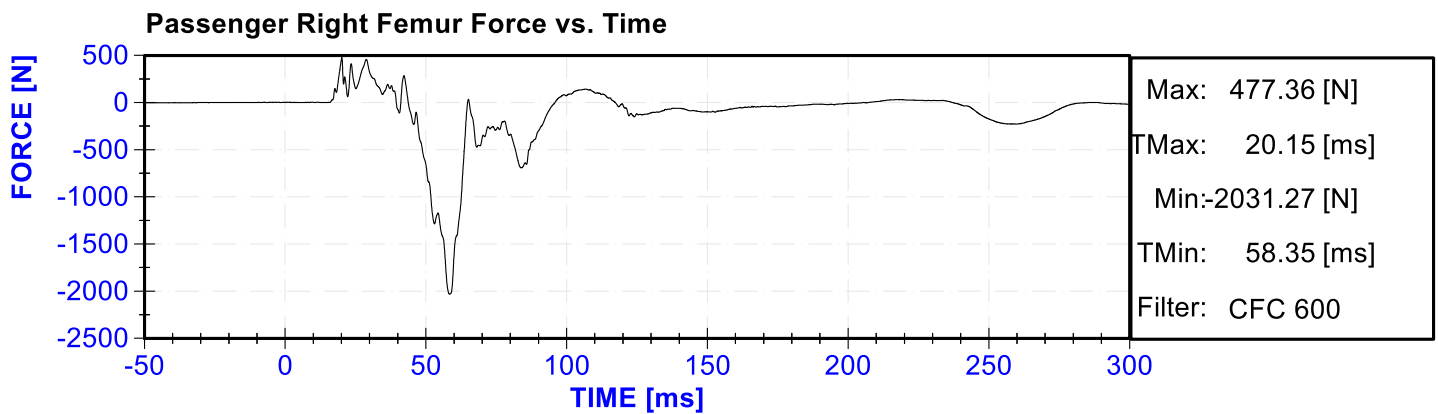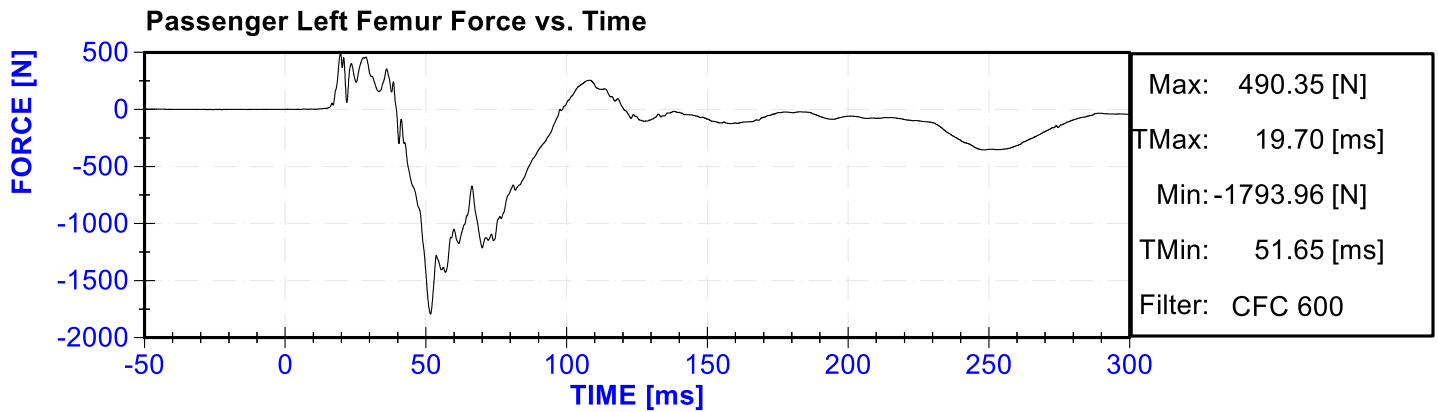

APPENDIX C

DUMMY CALIBRATION AND PERFORMANCE VERIFICATION DATA

CALIBRATION TEST RESULTS

PRE-TEST

HYBRID III 50TH PERCENTILE MALE - DRIVER ATD

SERIAL NO: 142


ATD Manufacturer	Humanetics	Test Technician	C. Mantell
ATD Serial Number	142	Laboratory Supervisor	K. Brogan




Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	18.9	25.6	°C	21.5	Pass
Humidity	10	70	%	34.4	Pass
Resultant Acceleration	225	275	g's	250.3	Pass
Oscillation	0	10	%	2.8	Pass
Lateral Acceleration	-15	15	g's	-10.1	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
X Accelerometer	ENDEVCO 7264	P51681	11/3/2020	5/4/2021
Y Accelerometer	ENDEVCO 7264	P64151	11/3/2020	5/4/2021
Z Accelerometer	ENDEVCO 7264	P52114	11/3/2020	5/4/2021

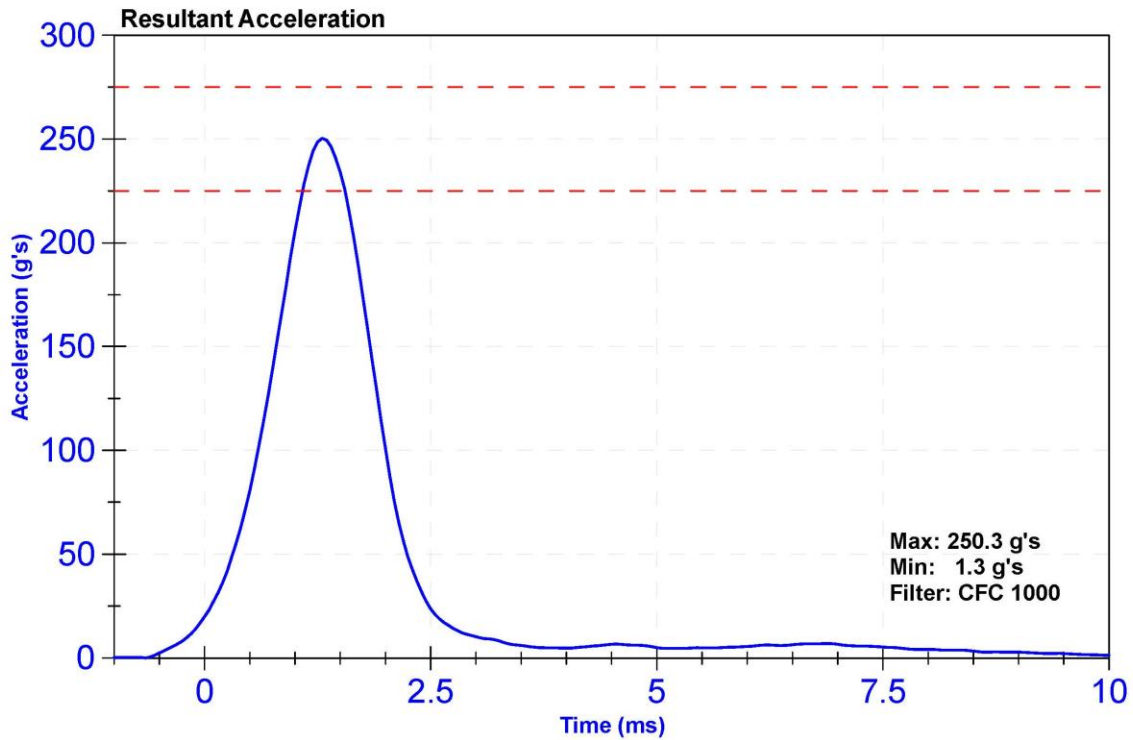

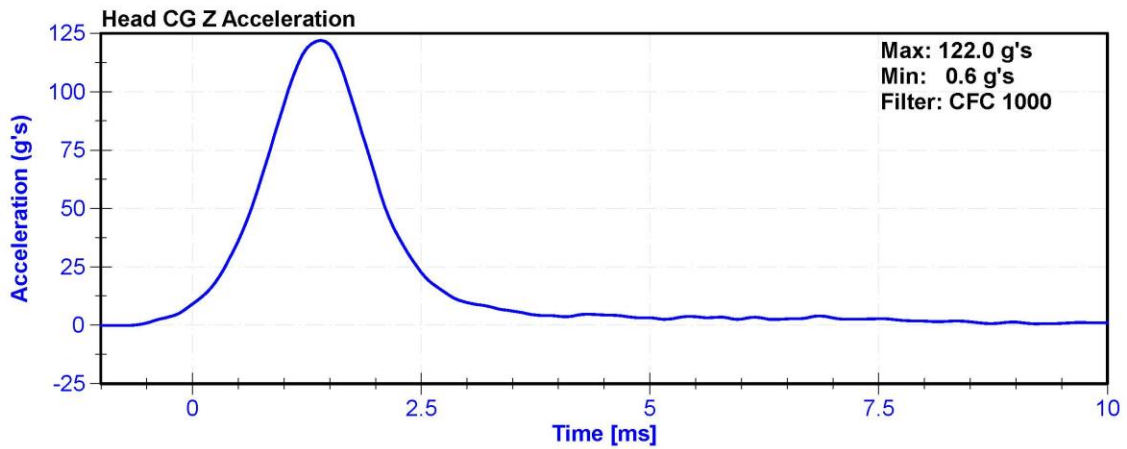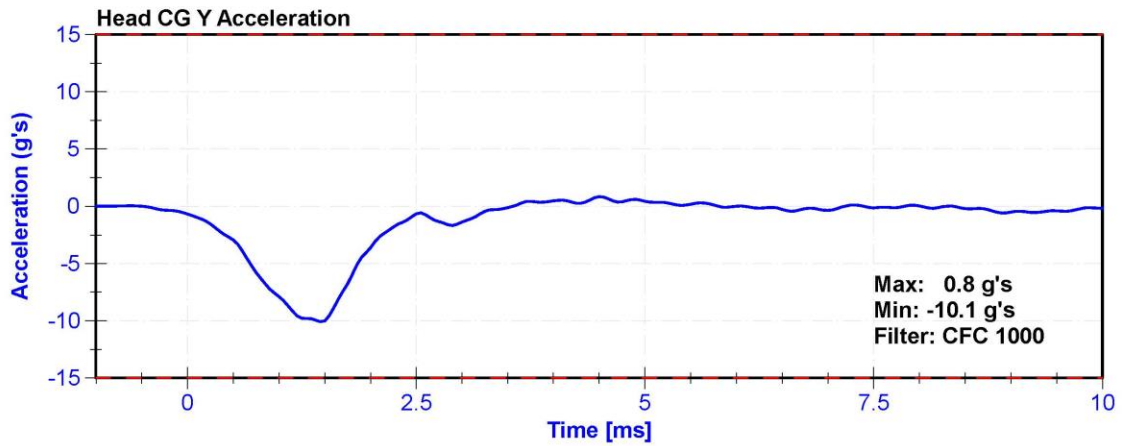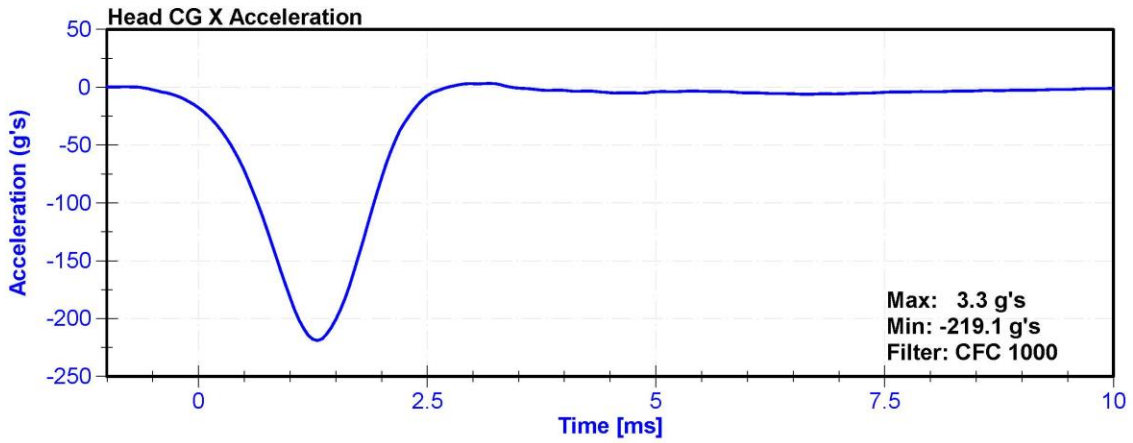



ATD Manufacturer	Humanetics	Test Technician	E. Helenbrook
ATD Serial Number	142	Laboratory Supervisor	K. Brogan




Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21.5	Pass
Humidity	10	70	%	22.2	Pass
Velocity	6.89	7.13	m/s	6.958	Pass
Pendulum Deceleration at 10ms	22.5	27.5	g's	25.82	Pass
Pendulum Deceleration at 20ms	17.6	22.6	g's	22.27	Pass
Pendulum Deceleration at 30ms	12.5	18.5	g's	14.50	Pass
Max. Pendulum Deceleration After 30ms	0	29	g's	26.0	Pass
Pendulum Deceleration Time to 5 g's	34	42	ms	41.3	Pass
Maximum D Plane Rotation	64	78	deg	75.1	Pass
Time to Maximum Rotation	57	64	ms	62.3	Pass
Rotation Decay to Zero	113	127	ms	118.4	Pass
Moment About Occipital Condyle	88.1	108.4	Nm	95.91	Pass
Time to Maximum Moment	47	58	ms	55.0	Pass
Moment Decay to Zero	97	107	ms	103.2	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	ENDEVCO 7231CT	AC-C16503 Striker	2/6/2020	2/5/2021
Pendulum Potentiometer	ETI SP22G	DS-LABPOT1	9/17/2020	9/17/2021
Condyle Potentiometer	ETI SP22G	DS-LABPOT2	9/17/2020	9/17/2021
Upper Neck Load Cell	DENTON 1716A	LC-2186Fx	11/10/2020	11/10/2021

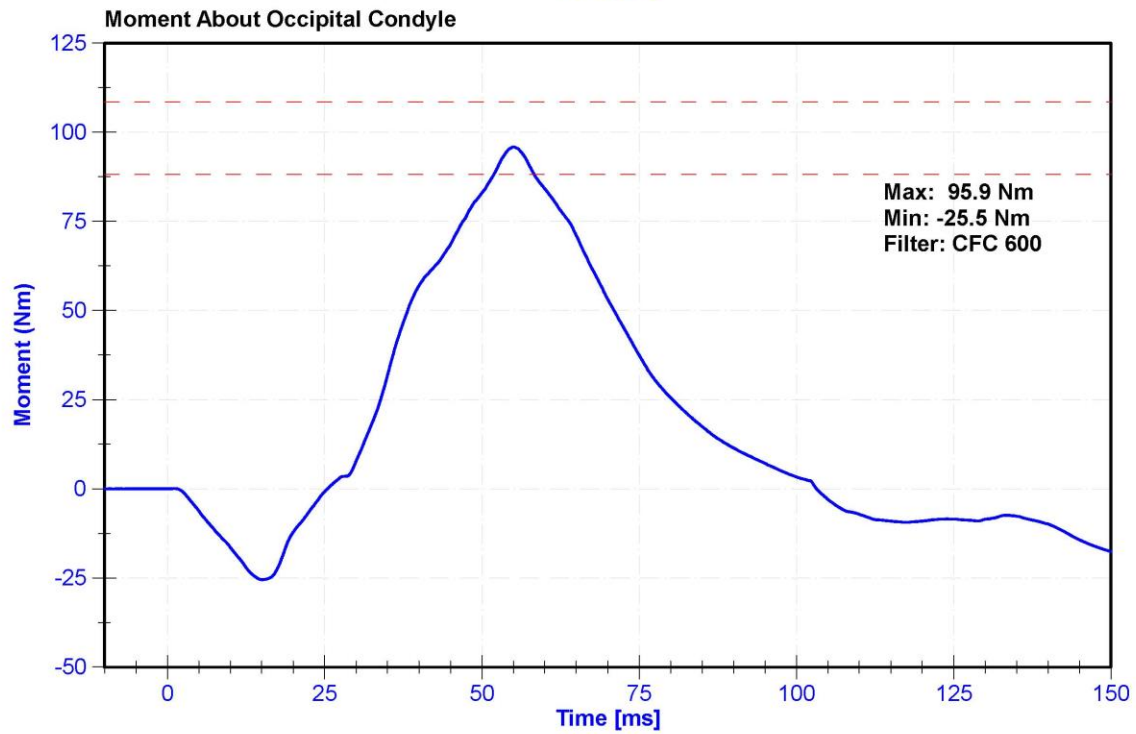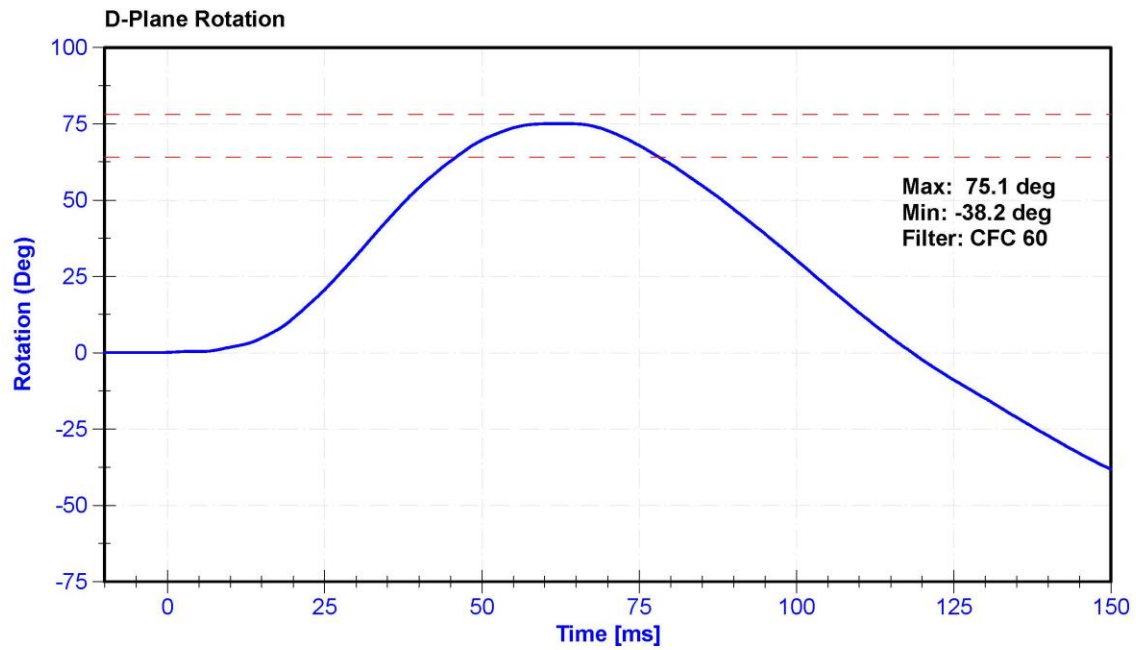

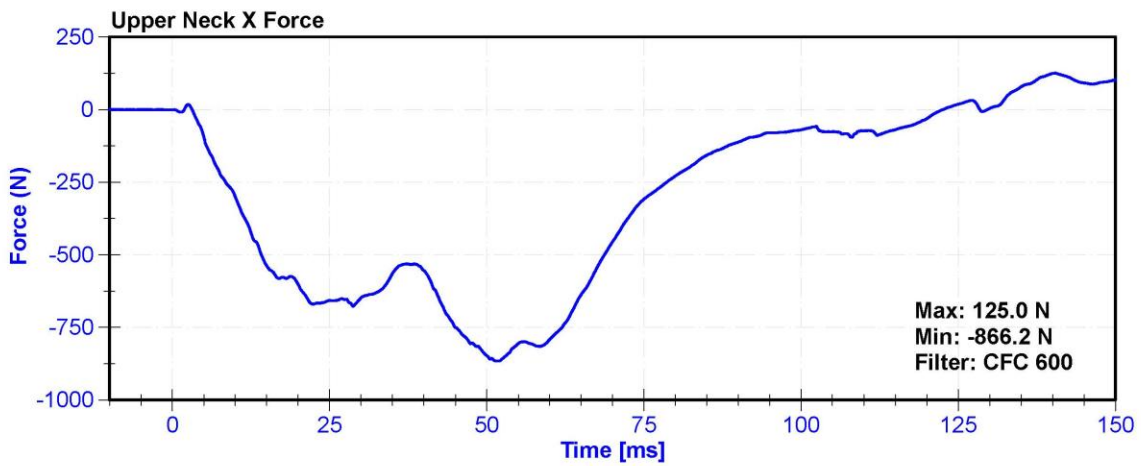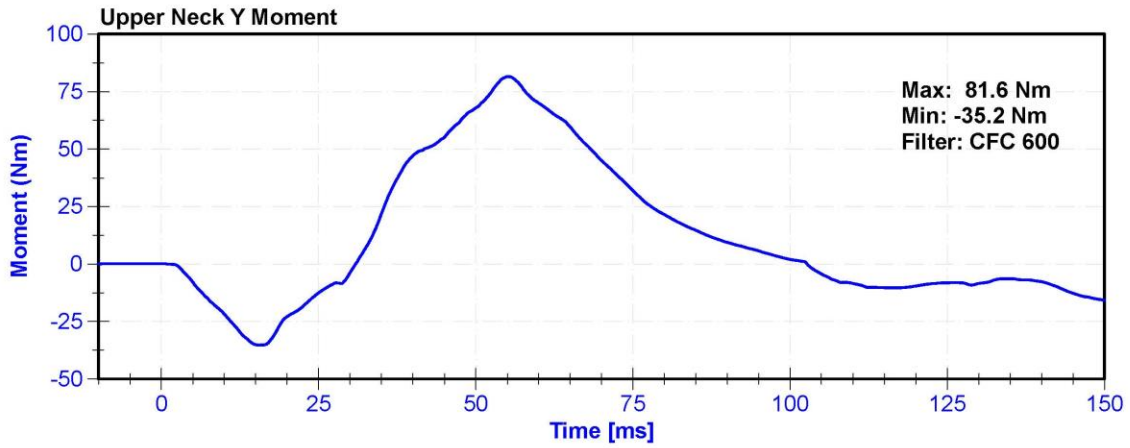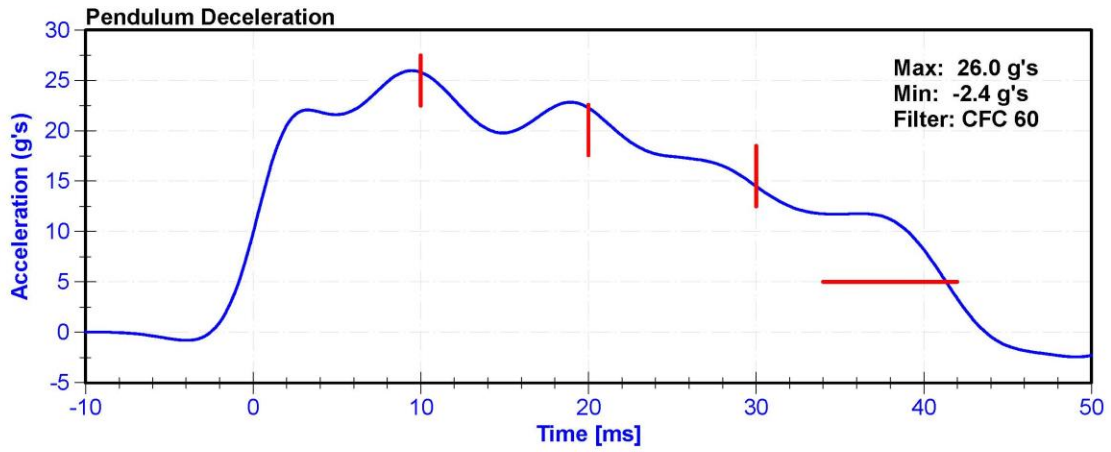



ATD Manufacturer	Humanetics	Test Technician	E. Helenbrook
ATD Serial Number	142	Laboratory Supervisor	K. Brogan




Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21.4	Pass
Humidity	10	70	%	22.2	Pass
Velocity	5.94	6.19	m/s	6.005	Pass
Pendulum Deceleration at 10ms	17.2	21.2	g's	20.51	Pass
Pendulum Deceleration at 20ms	14	19	g's	18.9	Pass
Pendulum Deceleration at 30ms	11	16	g's	14.3	Pass
Max. Pendulum Deceleration After 30ms	0	22	g's	20.5	Pass
Pendulum Deceleration Time to 5 g's	38	46	ms	42.1	Pass
Maximum D Plane Rotation	81	106	deg	98.3	Pass
Time to Maximum Rotation	72	82	ms	77.0	Pass
Rotation Decay to Zero	147	174	ms	156.7	Pass
Minimum Moment About OC	-80	-52.9	Nm	-72.86	Pass
Time to Minimum Moment	65	79	ms	71.5	Pass
Moment Decay to Zero	120	148	ms	139.1	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	ENDEVCO 7231CT	AC-C16503 Striker	2/6/2020	2/5/2021
Pendulum Potentiometer	ETI SP22G	DS-LABPOT1	9/17/2020	9/17/2021
Condyle Potentiometer	ETI SP22G	DS-LABPOT2	9/17/2020	9/17/2021
Upper Neck Load Cell	DENTON 1716A	LC-2186Fx	11/10/2020	11/10/2021

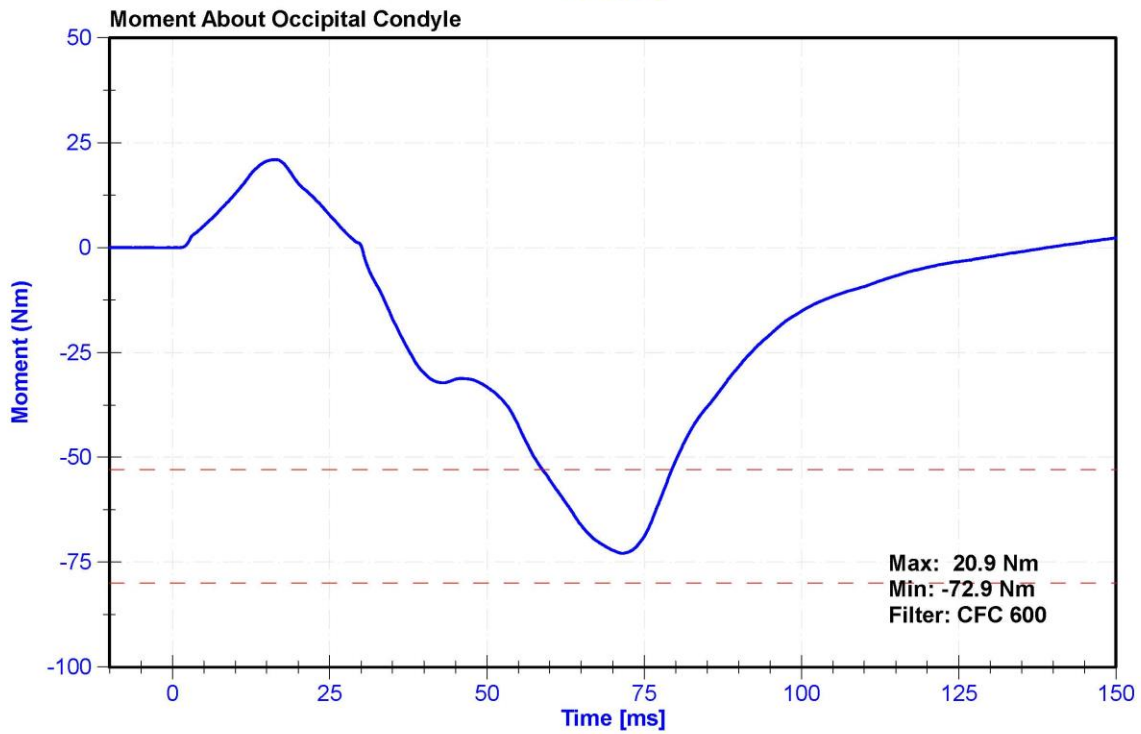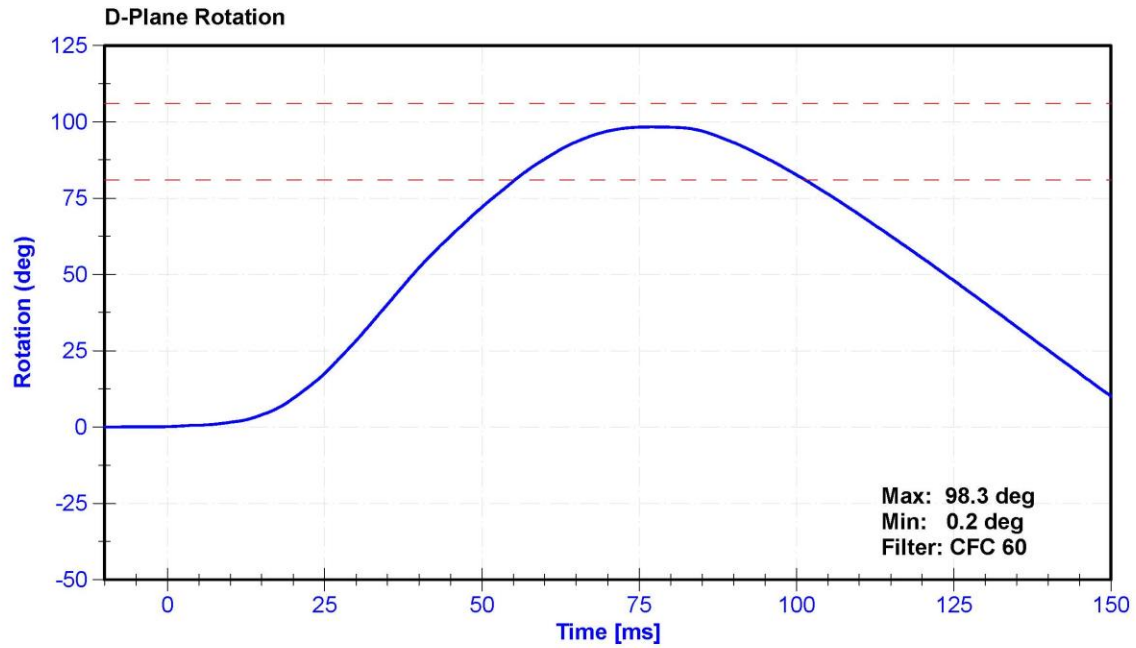

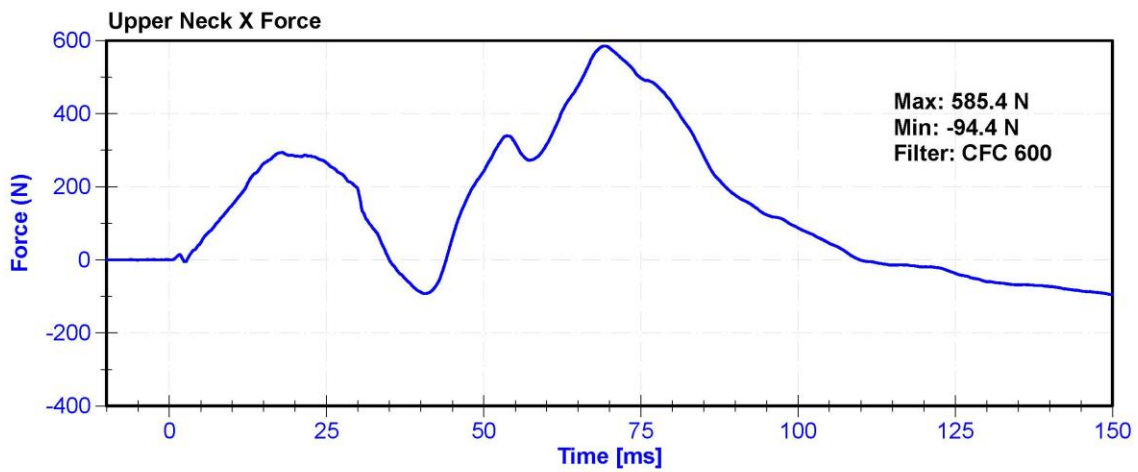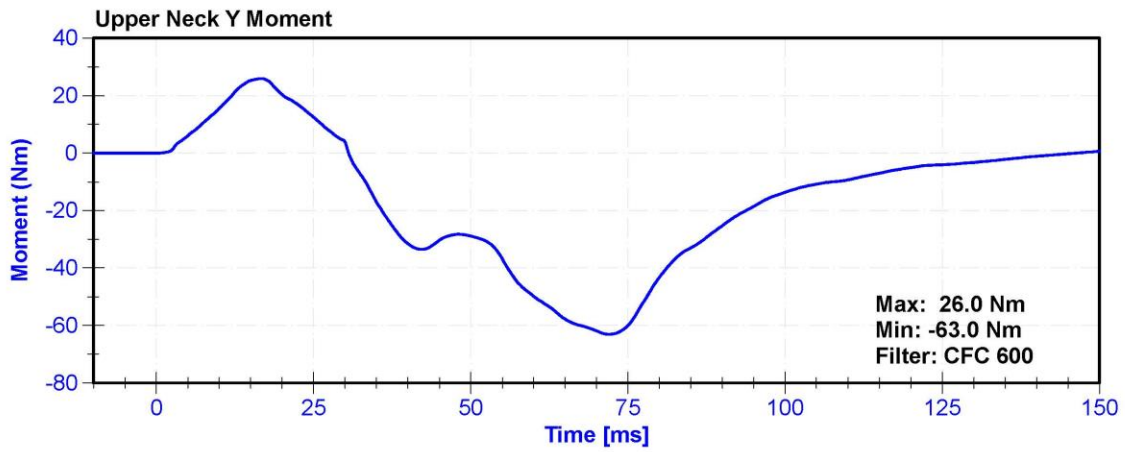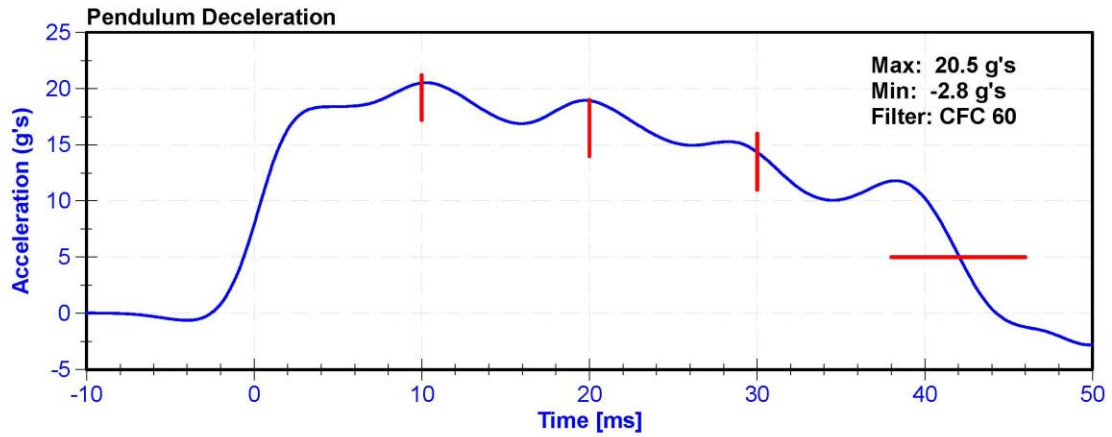


ATD Manufacturer	Humanetics	Test Technician	E. Helenbrook
ATD Serial Number	142	Laboratory Supervisor	K. Brogan



Results



Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	20.6	Pass
Humidity	10	70	%	22.2	Pass
Velocity	6.59	6.83	m/s	6.641	Pass
Chest Displacement	-72.6	-63.5	mm	-68.69	Pass
Resistive Force	5160	5894	N	5770.7	Pass
Hysteresis	65	85	%	70.6	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	MSI 64C-2000	A279031	5/8/2020	5/8/2021
Chest Potentiometer	Servo 6209-2038	DS-142	11/19/2020	5/20/2021

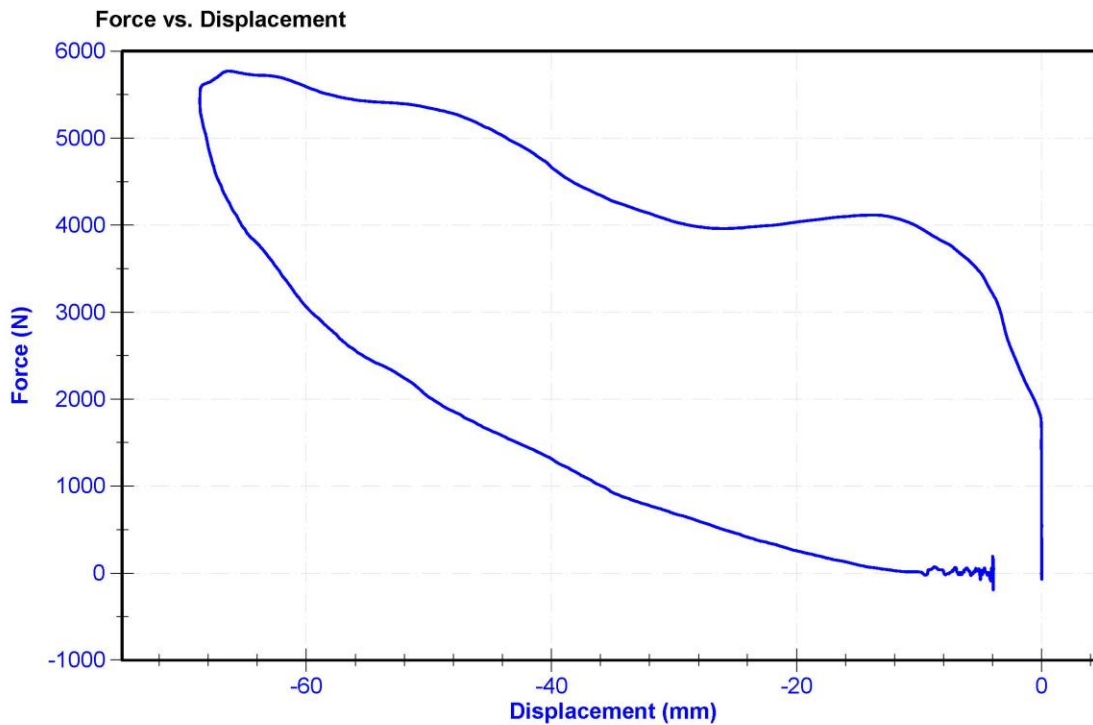

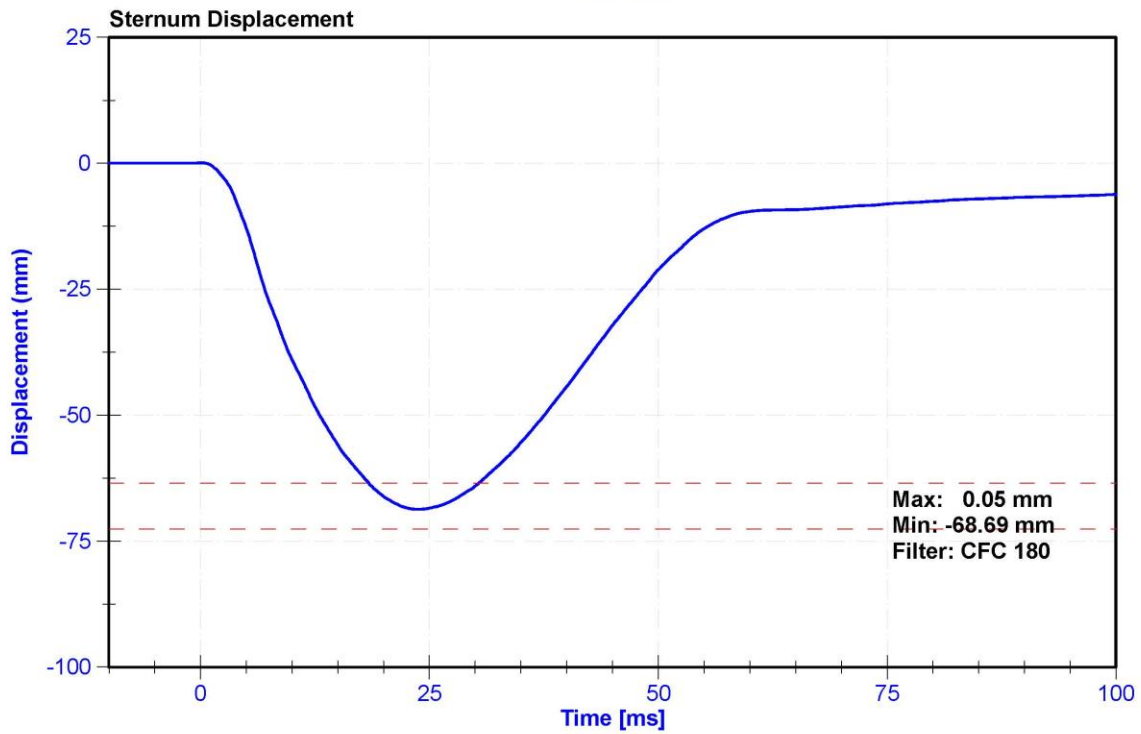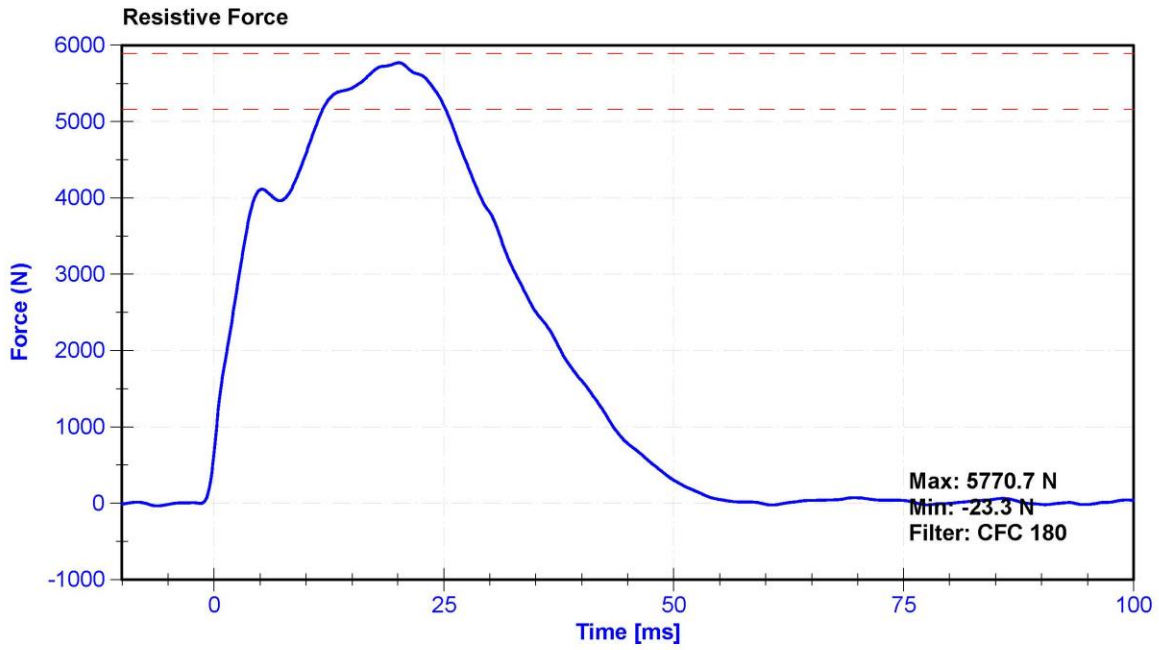

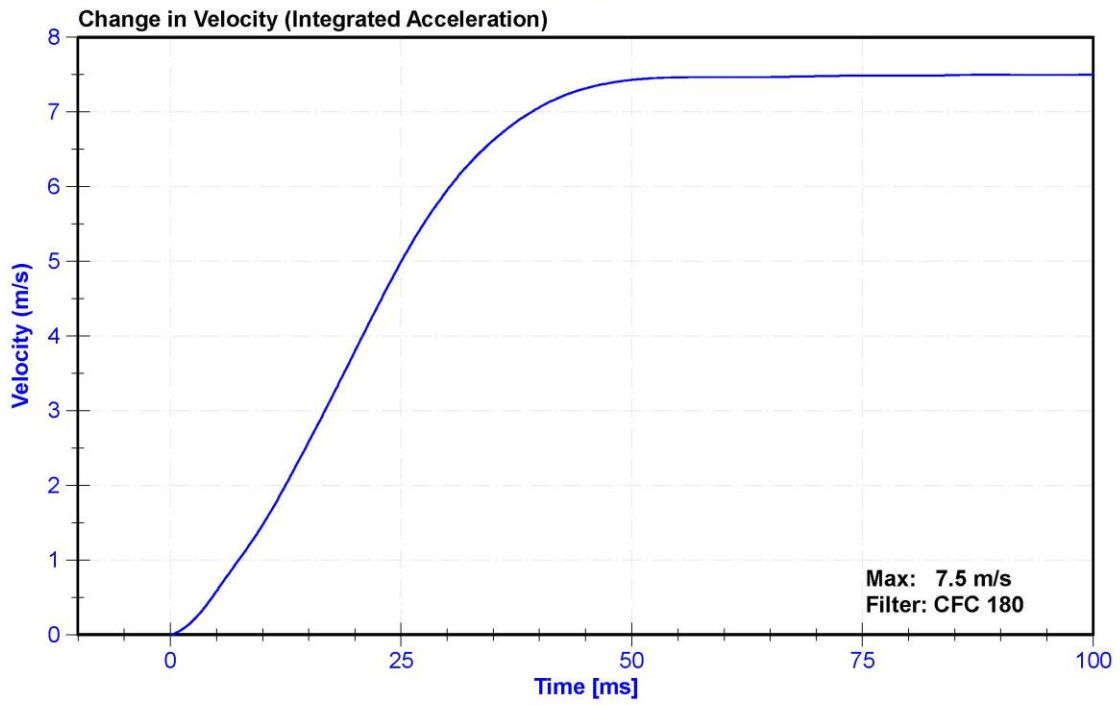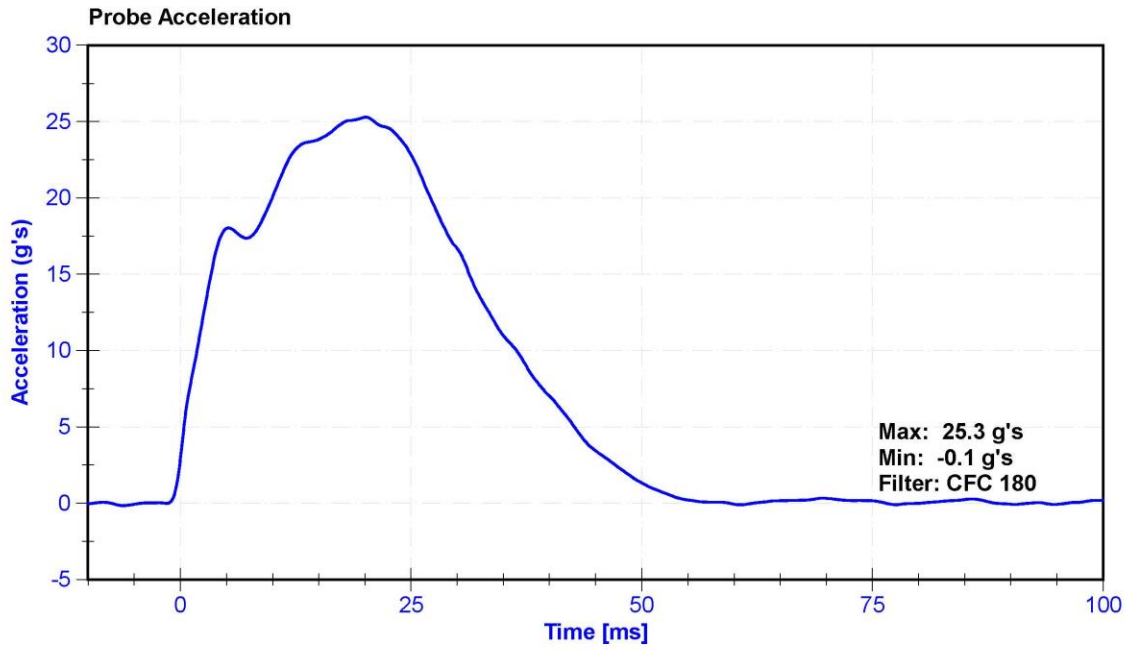


ATD Manufacturer	Humanetics	Test Technician	C. Mantell
ATD Serial Number	142	Laboratory Supervisor	K. Brogan

Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	18.9	25.6	°C	21.5	Pass
Humidity	10	70	%	32.2	Pass
Average Velocity	5	10	deg/s	7.2	Pass
Angle at 203Nm	40	50	deg	43.7	Pass
Moment at 30 degrees	0	94.9	Nm	83.1	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Potentiometer	ETI SP22	DS-0008	9/18/2020	9/18/2021
Load Cell	Key Trans 2301-02	LC-115 My	9/12/2020	9/12/2021

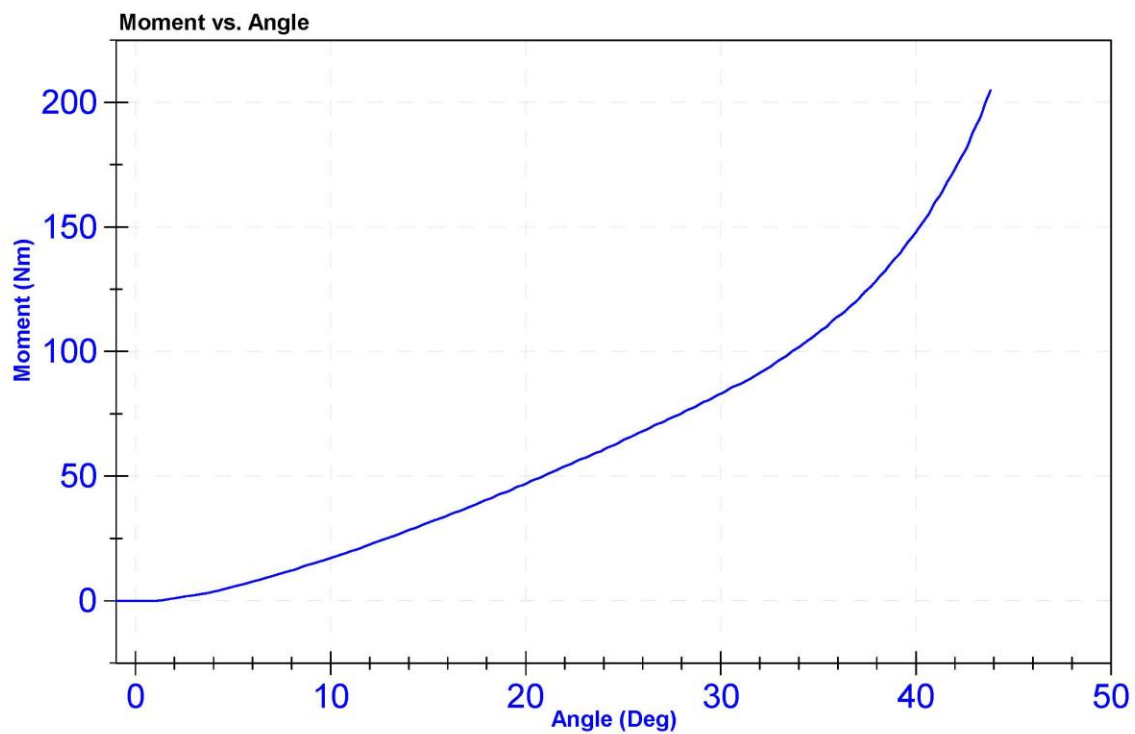


ATD Manufacturer	Humanetics	Test Technician	C. Mantell
ATD Serial Number	142	Laboratory Supervisor	K. Brogan

Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	18.9	25.6	°C	21.5	Pass
Humidity	10	70	%	32.2	Pass
Average Velocity	5	10	deg/s	7.3	Pass
Angle at 203Nm	40	50	deg	44.6	Pass
Moment at 30 degrees	0	94.9	Nm	88.3	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Potentiometer	ETI SP22	DS-0008	9/18/2020	9/18/2021
Load Cell	Key Trans 2301-02	LC-115 My	9/12/2020	9/12/2021

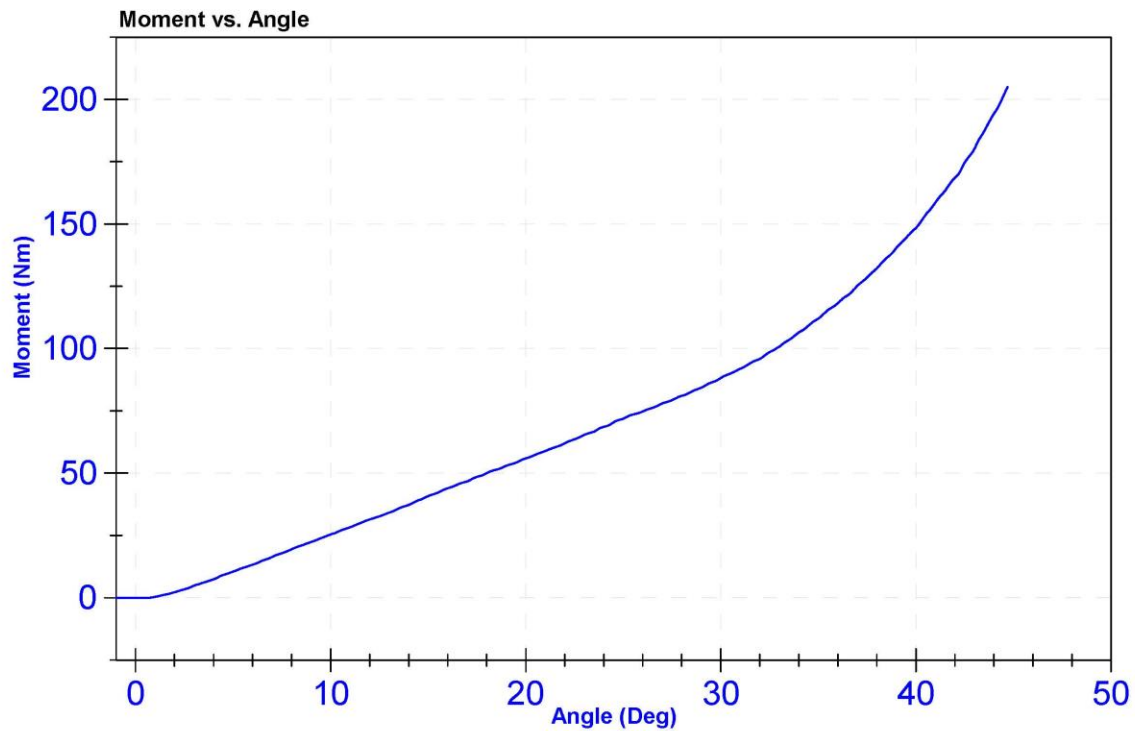


ATD Manufacturer	Humanetics	Test Technician	S. Vacanti
ATD Serial Number	142	Laboratory Supervisor	K. Brogan



Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	18.9	25.6	°C	21.6	Pass
Humidity	10	70	%	34.2	Pass
Velocity	2.07	2.13	m/s	2.120	Pass
Maximum Resistive Force	4720	5780	N	5366.7	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	MSI 64C-2000	A279031	5/8/2020	5/8/2021

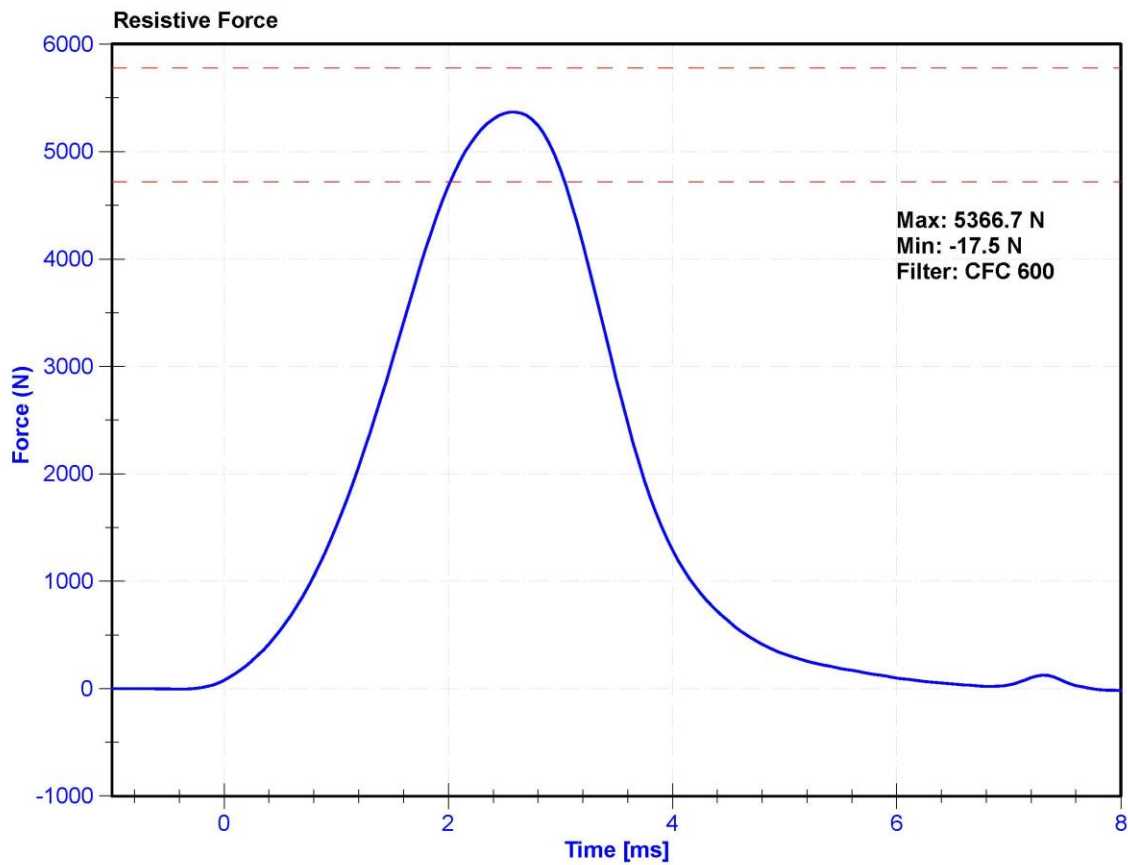

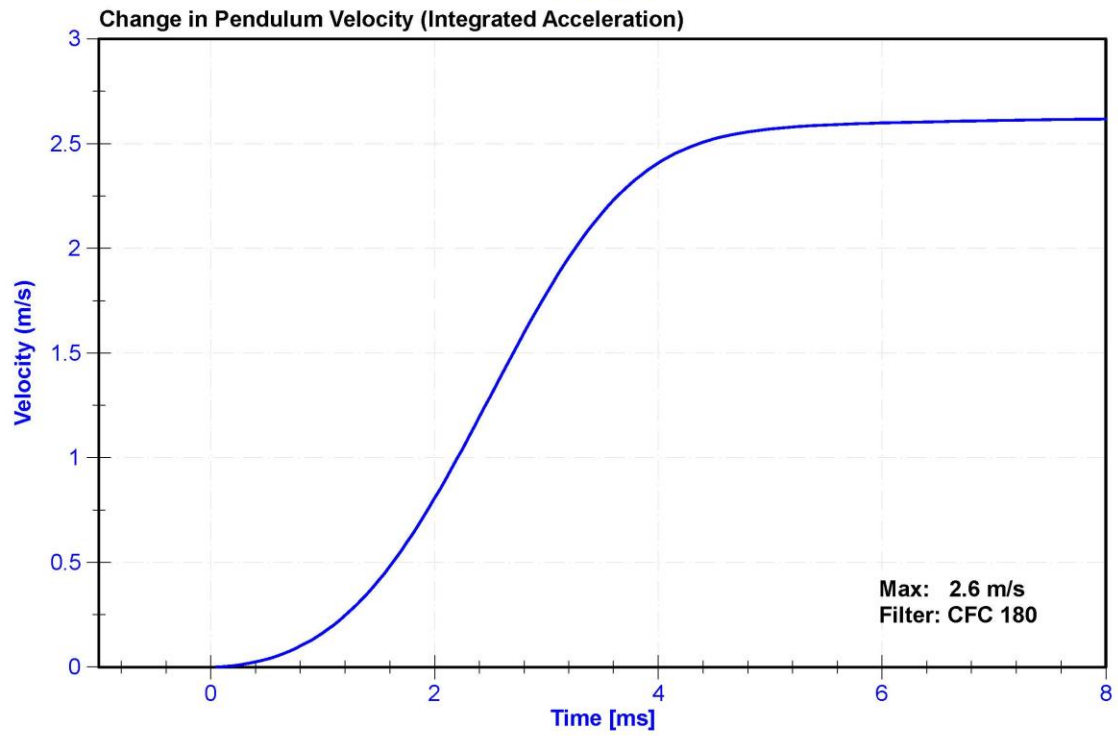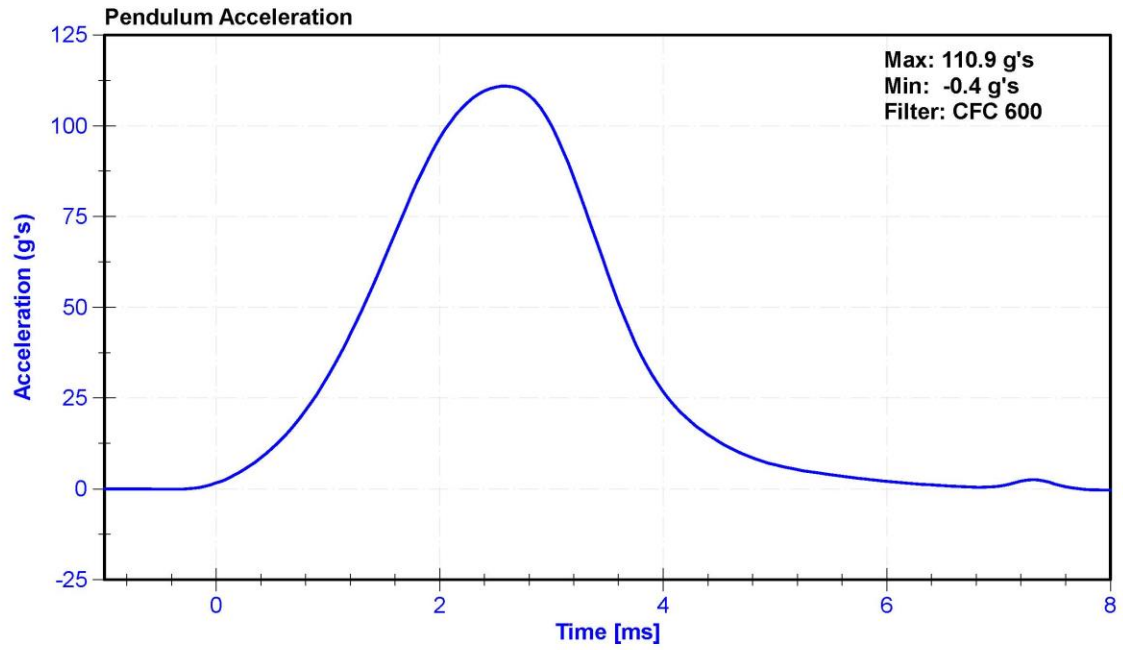


ATD Manufacturer	Humanetics	Test Technician	S. Vacanti
ATD Serial Number	142	Laboratory Supervisor	K. Brogan



Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	18.9	25.6	°C	21.2	Pass
Humidity	10	70	%	35	Pass
Velocity	2.07	2.13	m/s	2.121	Pass
Maximum Resistive Force	4720	5780	N	5466.2	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	MSI 64C-2000	A279031	5/8/2020	5/8/2021

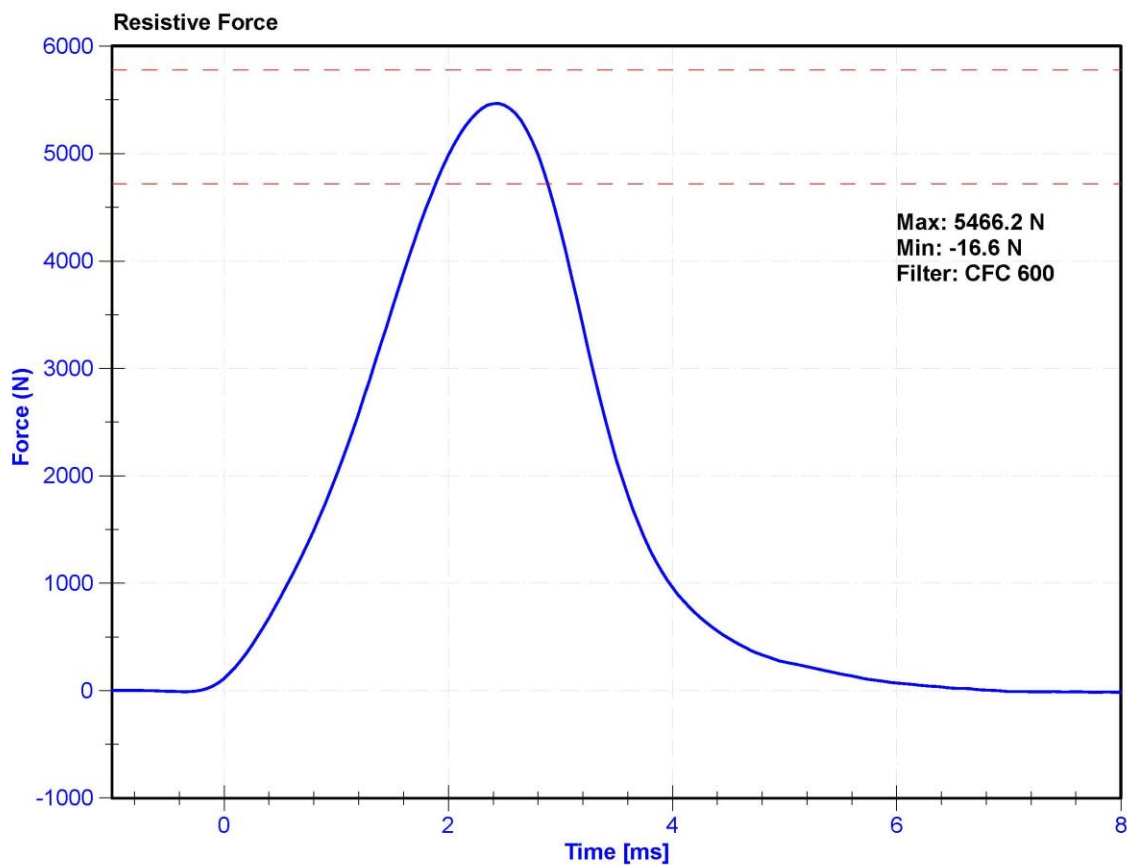

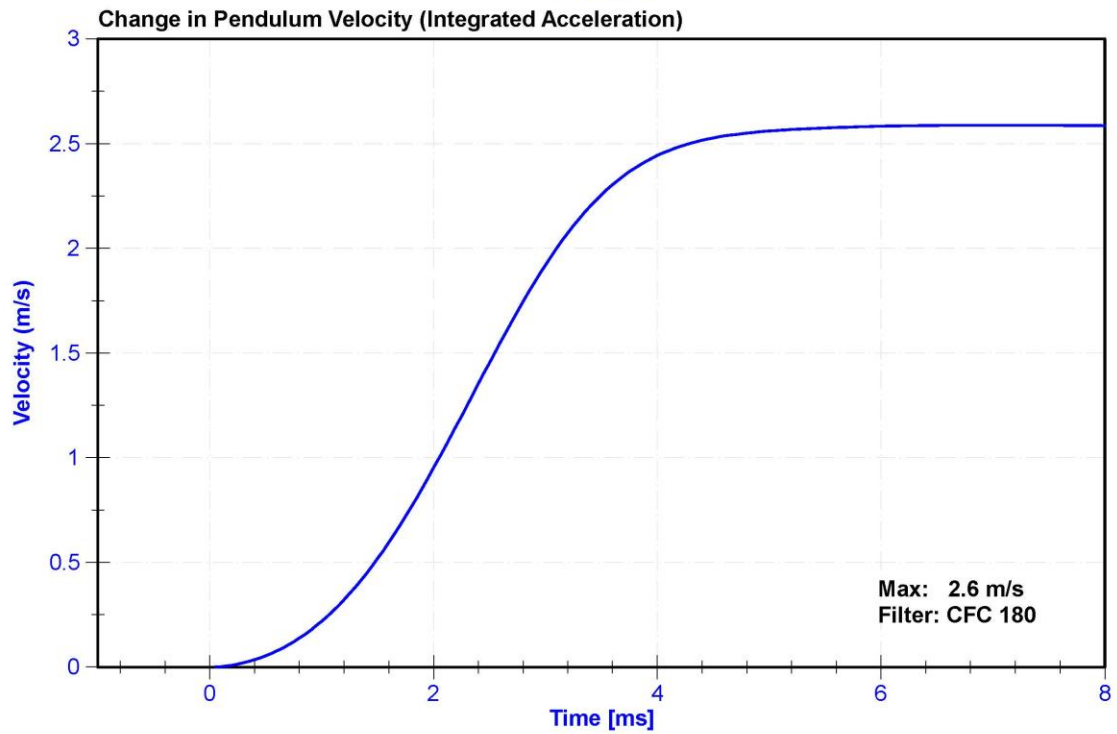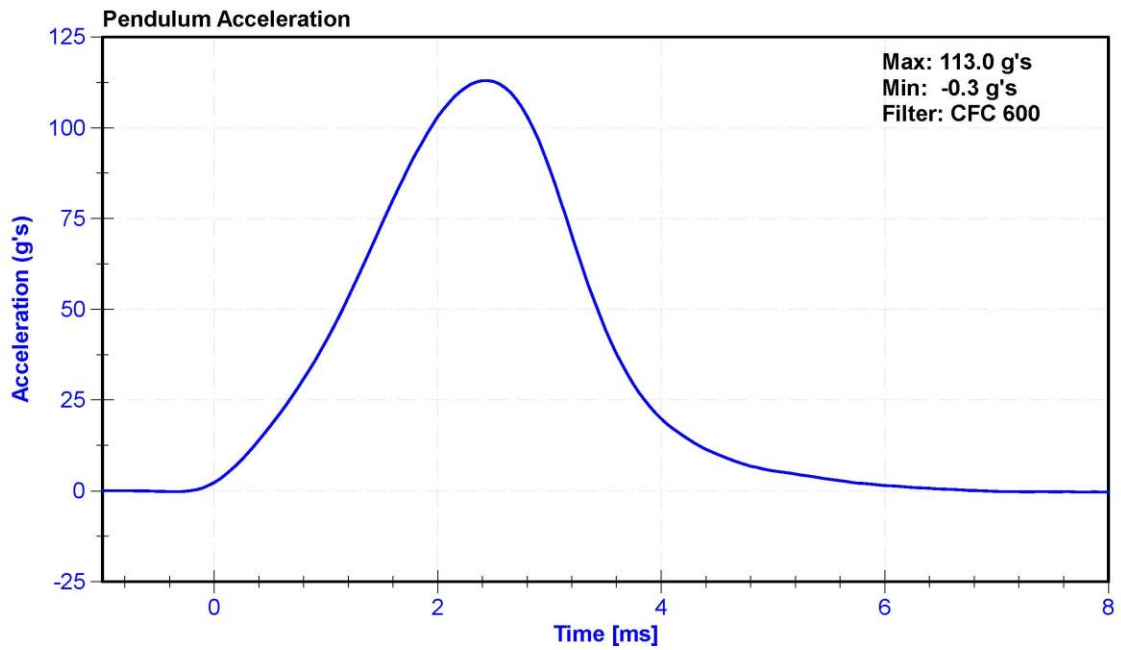

CALIBRATION TEST RESULTS

PRE-TEST

HYBRID III 5TH PERCENTILE - PASSENGER ATD

SERIAL NO: 139




External Measurements - Hybrid 3 - 5th Female

Technician: K. Brogan

Date: 12/08/2020

Dummy Serial Number: 139

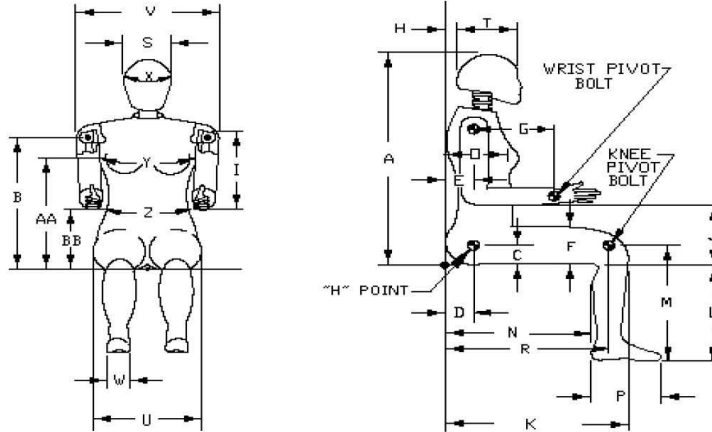

Symbol	Description	Specification (mm)		Result (mm)	Pass/Fail
A	Sitting Height	775	800	790	Pass
B	Shoulder Pivot Height	432	457	446	Pass
C	H-Point Height	81	86	84	Pass
D	H-Point from Backline	145	150	146	Pass
E	Shoulder Pivot from Backline	69	84	77	Pass
F	Thigh Clearance	119	135	128	Pass
G	Back of Elbow to Wrist Pivot	244	259	254	Pass
H	Head Back to Backline	43	48	45	Pass
I	Shoulder to Elbow Length	277	297	289	Pass
J	Elbow Rest Height	183	203	195	Pass
K	Buttock to Knee Length	521	546	542	Pass
L	Popliteal Height	356	376	363	Pass
M	Knee Pivot Height	394	419	402	Pass
N	Buttock Popliteal Length	414	439	425	Pass
O	Chest Depth without Jacket	175	191	185	Pass
P	Foot Length (right)	219	234	224	Pass
R	Buttock To Knee Pivot Length	457	483	475	Pass
S	Head Breadth	137	147	143	Pass
T	Head Depth	178	188	182	Pass
U	Hip Breadth	300	315	309	Pass
V	Shoulder Breadth	351	366	362	Pass
W	Foot Breadth	79	94	87	Pass
X	Head Circumference	528	549	535	Pass
Y	Chest Circumference with Jacket	851	881	861	Pass
Z	Waist Circumference	460	790	773	Pass
AA	Reference Location (Chest Circumference)	333	358	345	Pass
BB	Reference Location (Waist Circumference)	160	170	165	Pass


ATD Manufacturer	Denton	Test Technician	C. Mantell
ATD Serial Number	139	Laboratory Supervisor	K. Brogan




Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	18.9	25.6	°C	21.6	Pass
Humidity	10	70	%	33.4	Pass
Resultant Acceleration	250	300	g's	261.4	Pass
Oscillation	0	10	%	1.9	Pass
Lateral Acceleration	-15	15	g's	-11.3	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
X Accelerometer	ENDEVCO 7264CT	AC-P58780	11/4/2020	5/5/2021
Y Accelerometer	ENDEVCO 7264	AC-P83320	11/4/2020	5/5/2021
Z Accelerometer	ENDEVCO 7264CT	AC-P58997	11/4/2020	5/5/2021

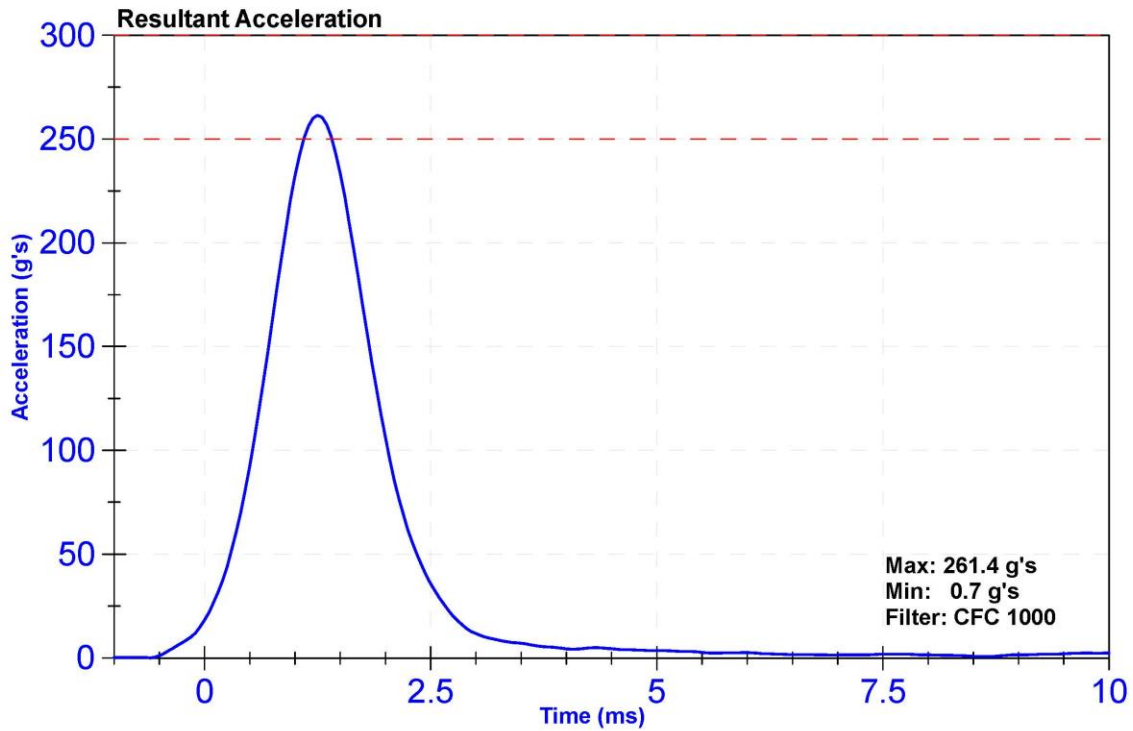

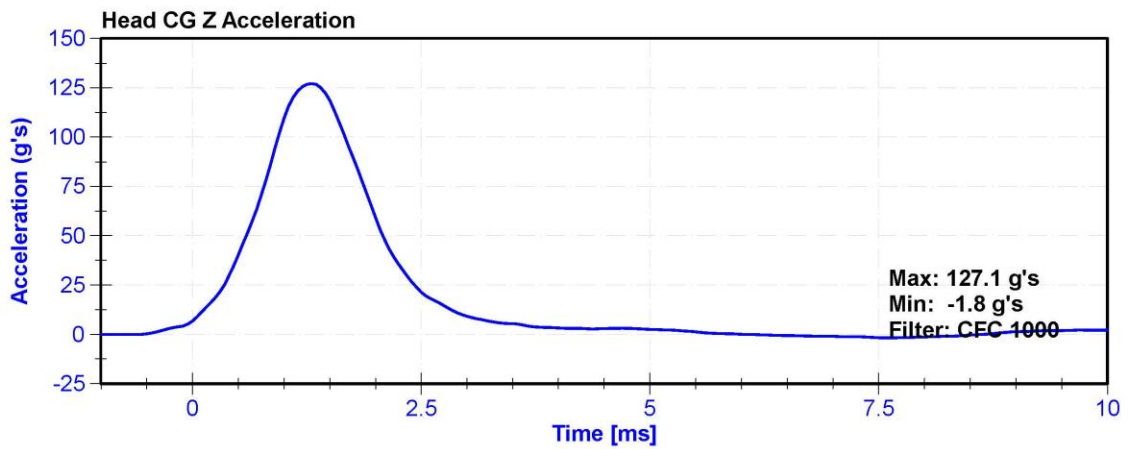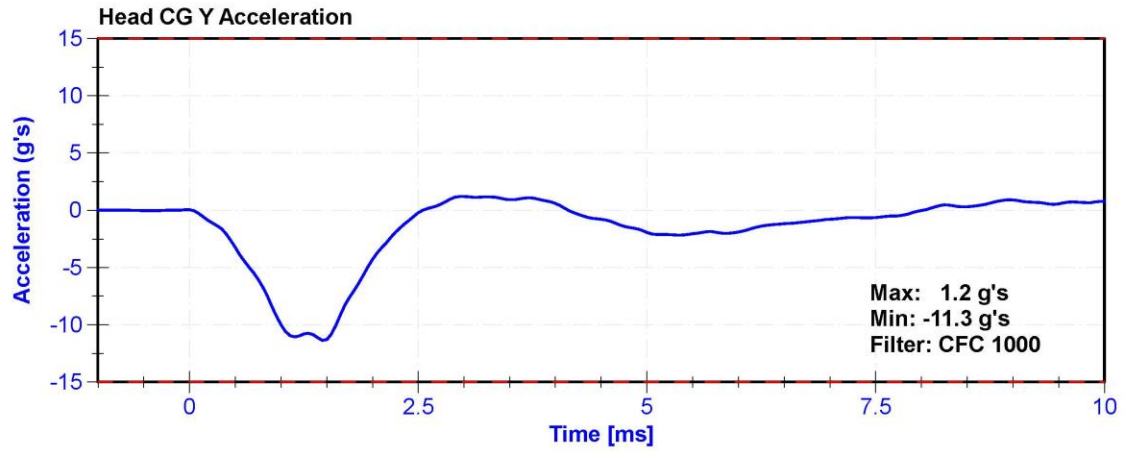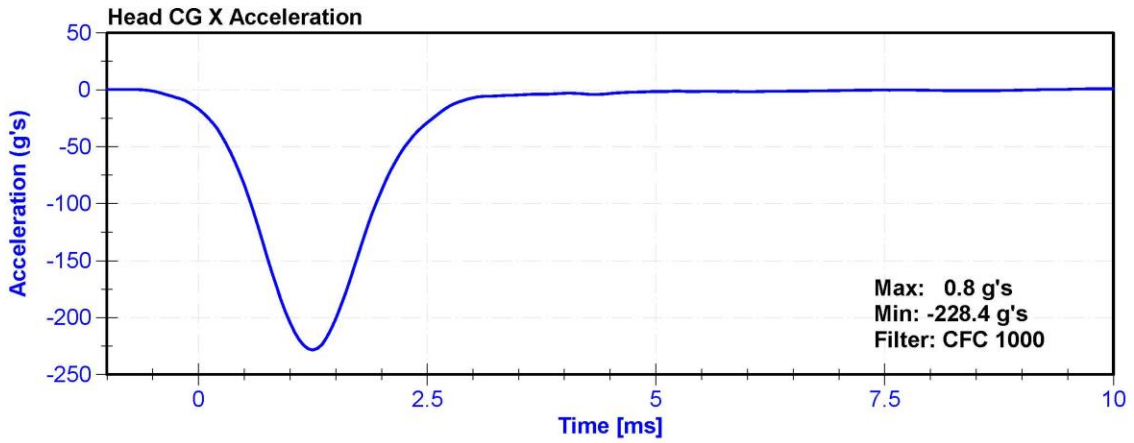


ATD Manufacturer	Denton	Test Technician	E. Helenbrook
ATD Serial Number	139	Laboratory Supervisor	K. Brogan



Results




Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	20.8	Pass
Humidity	10	70	%	22.2	Pass
Velocity	6.89	7.13	m/s	6.958	Pass
Pendulum Impulse at 10ms	2.1	2.5	m/s	2.16	Pass
Pendulum Impulse at 20ms	4.0	5.0	m/s	4.57	Pass
Pendulum Impulse at 30ms	5.8	7.0	m/s	6.69	Pass
Max D Plane Rotation	77	91	deg	82.1	Pass
Max Moment During Rotation Interval	69	83	Nm	75.1	Pass
Moment Decay to 10.0 Nm	80	100	ms	85.8	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	ENDEVCO 7231CT	AC-C16503 Striker	2/6/2020	2/5/2021
Pendulum Potentiometer	ETI SP22G	DS-LABPOT1	9/17/2020	9/17/2021
Condyle Potentiometer	ETI SP22G	DS-LABPOT2	9/17/2020	9/17/2021
Upper Neck Load Cell	Denton 1716A	LC-2192Fx	7/17/2020	7/17/2021

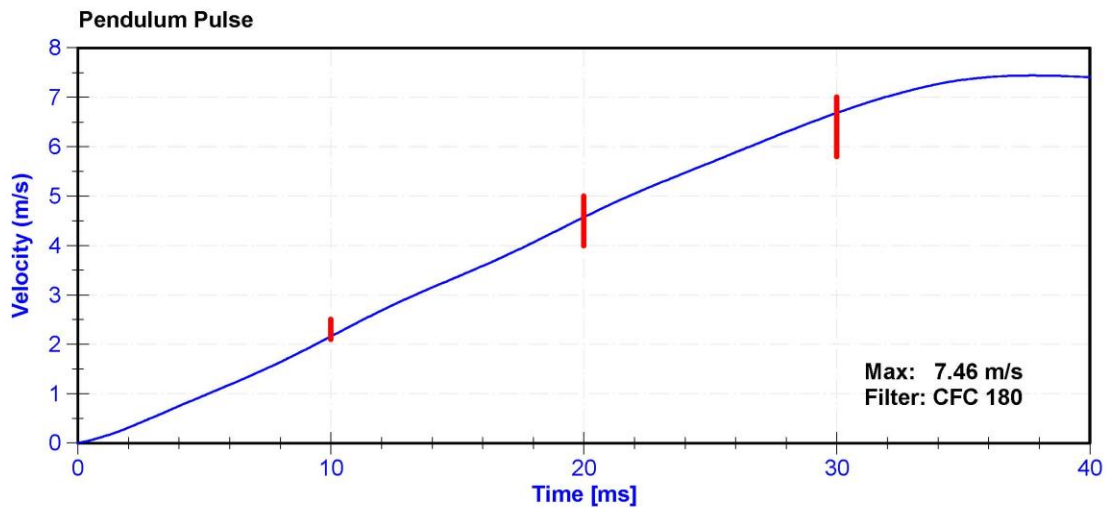

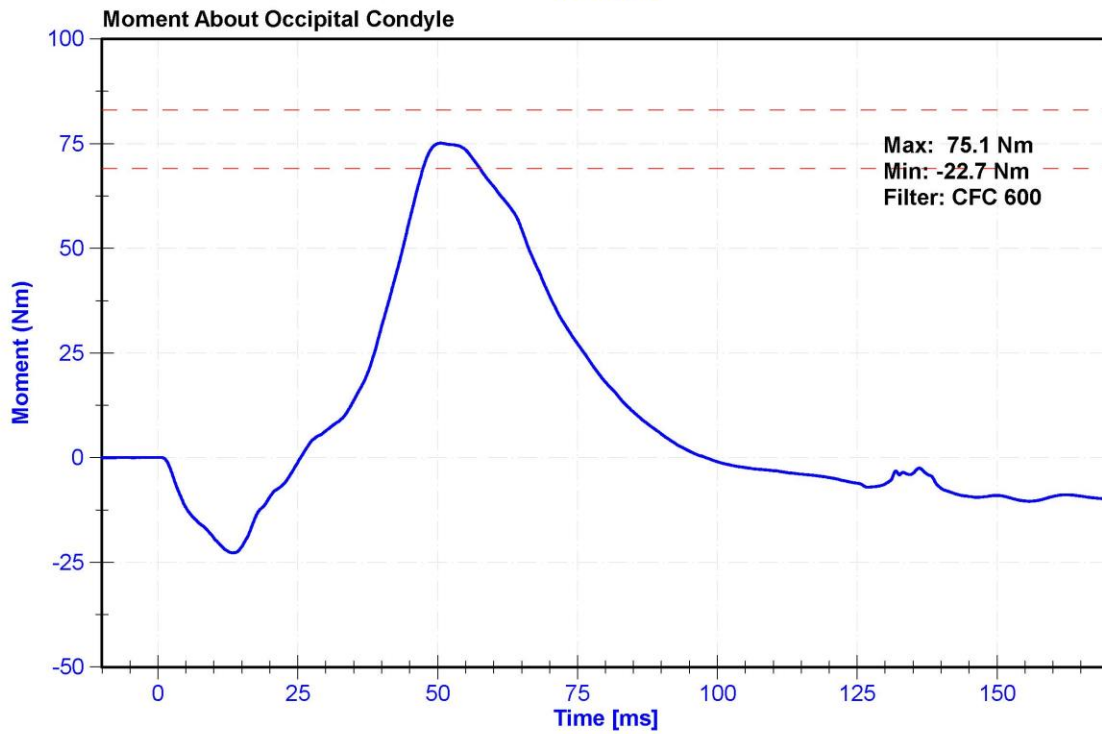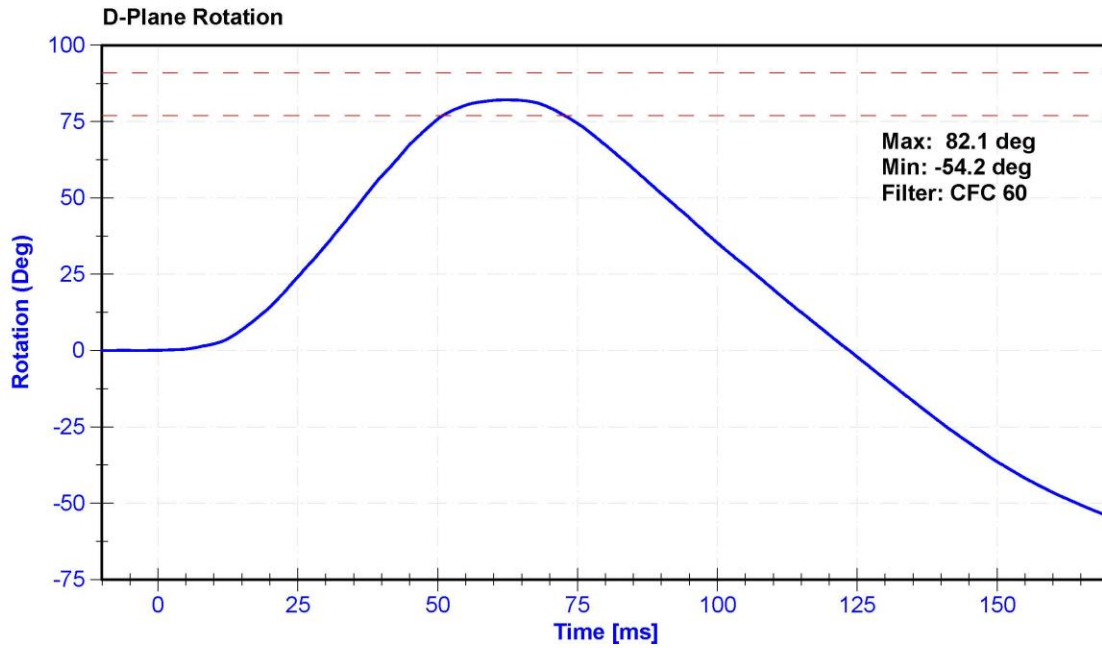

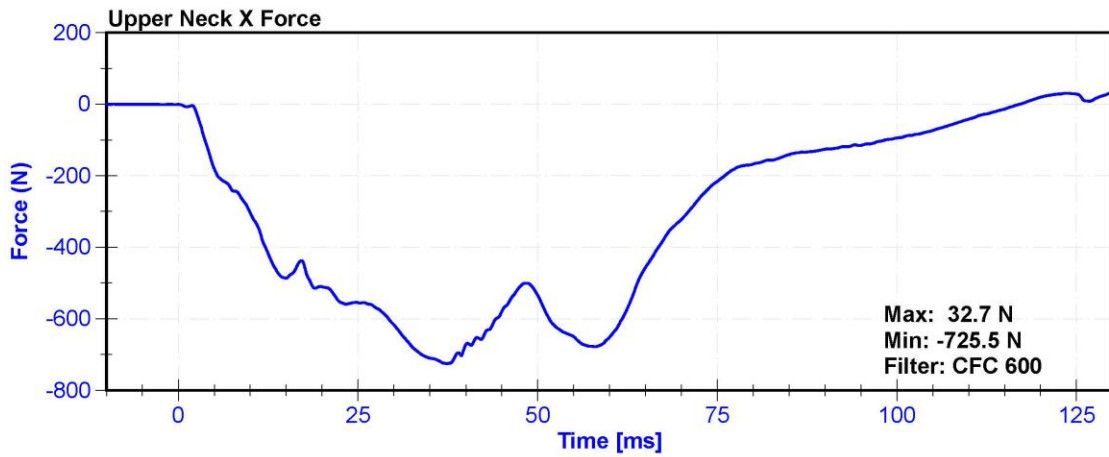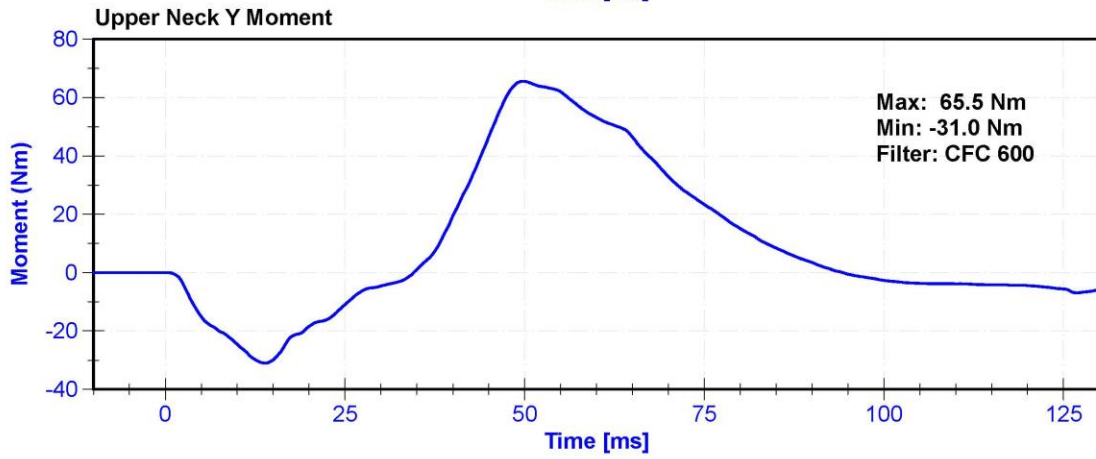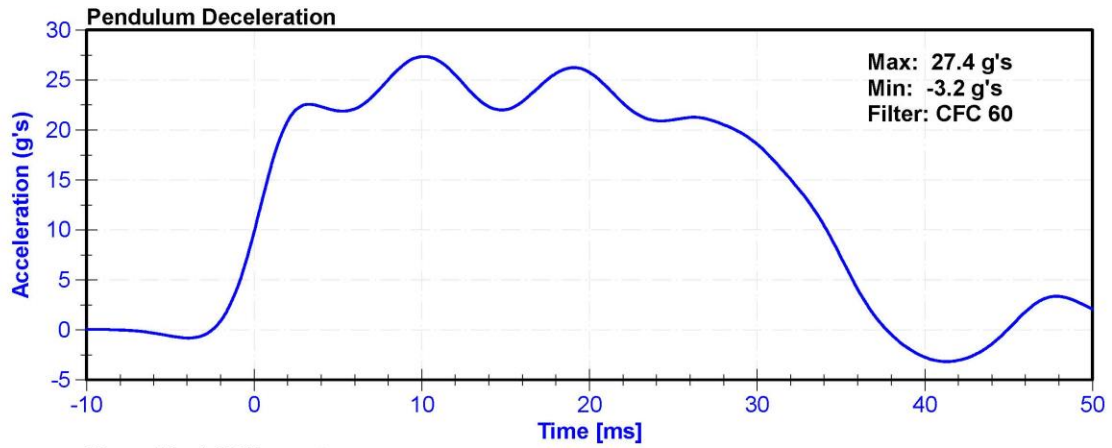


ATD Manufacturer	Denton	Test Technician	E. Helenbrook
ATD Serial Number	139	Laboratory Supervisor	K. Brogan



Results




Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	20.8	Pass
Humidity	10	70	%	22.2	Pass
Velocity	5.95	6.19	m/s	6.046	Pass
Pendulum Impulse at 10ms	1.5	1.9	m/s	1.60	Pass
Pendulum Impulse at 20ms	3.1	3.9	m/s	3.28	Pass
Pendulum Impulse at 30ms	4.6	5.6	m/s	4.87	Pass
D Plane Rotation	99	114	deg	106.9	Pass
Moment During Rotation Interval	-65	-53	Nm	-58.6	Pass
Moment Decay to -10Nm	94	114	ms	100.2	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	ENDEVCO 7231CT	AC-C16503 Striker	2/6/2020	2/5/2021
Pendulum Potentiometer	ETI SP22G	DS-LABPOT1	9/17/2020	9/17/2021
Condyle Potentiometer	ETI SP22G	DS-LABPOT2	9/17/2020	9/17/2021
Upper Neck Load Cell	Denton 1716A	LC-2192Fx	7/17/2020	7/17/2021

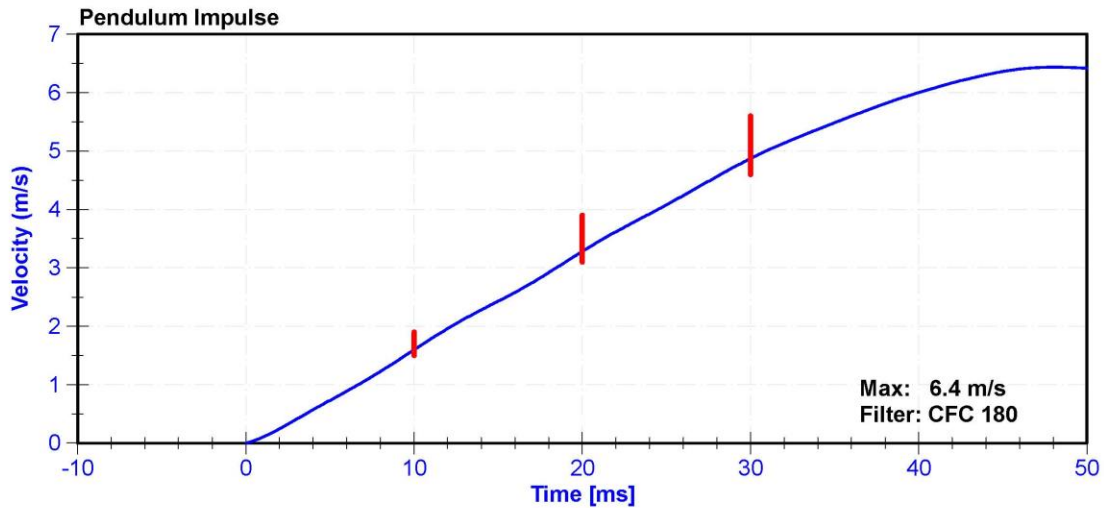

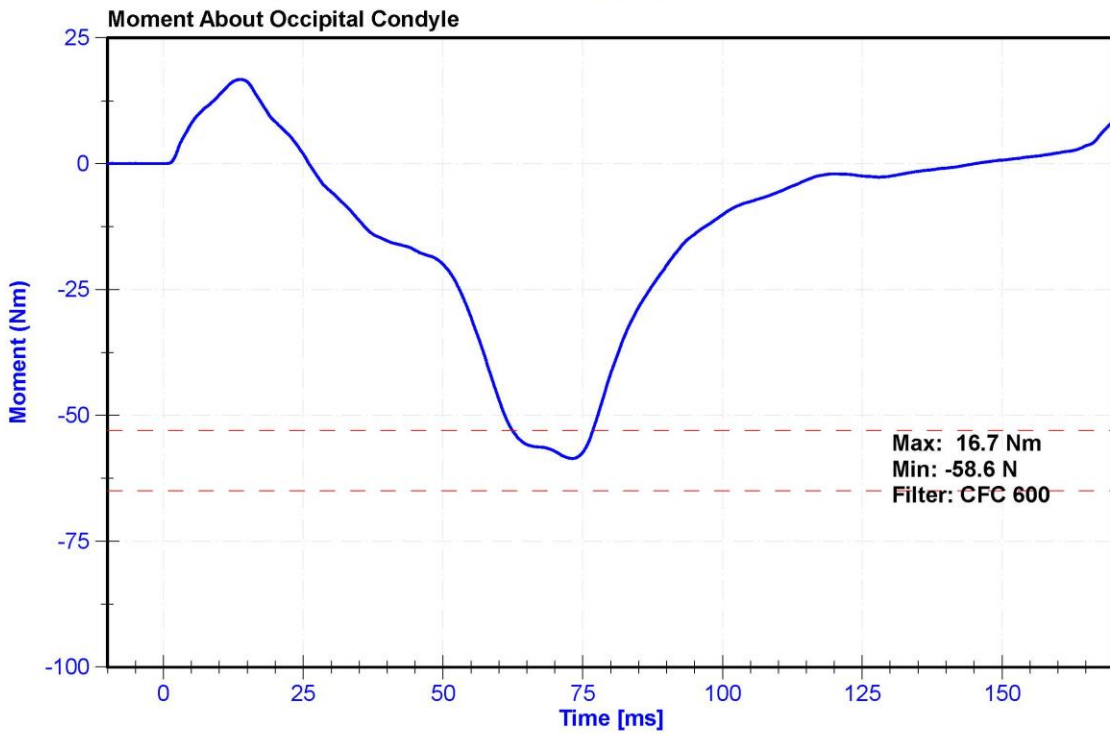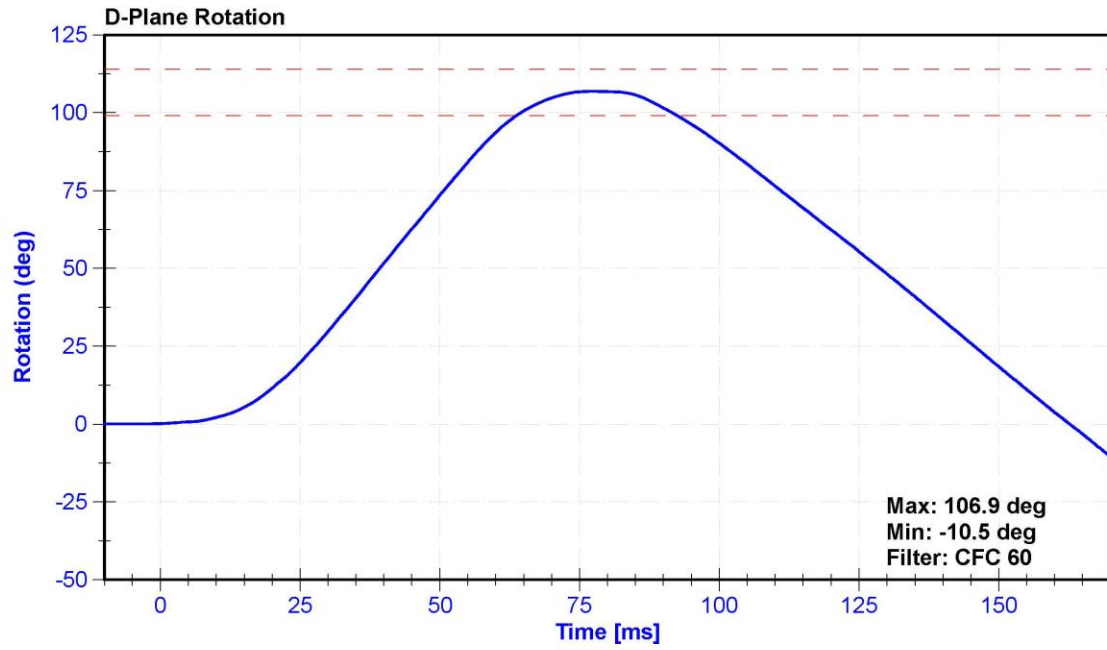

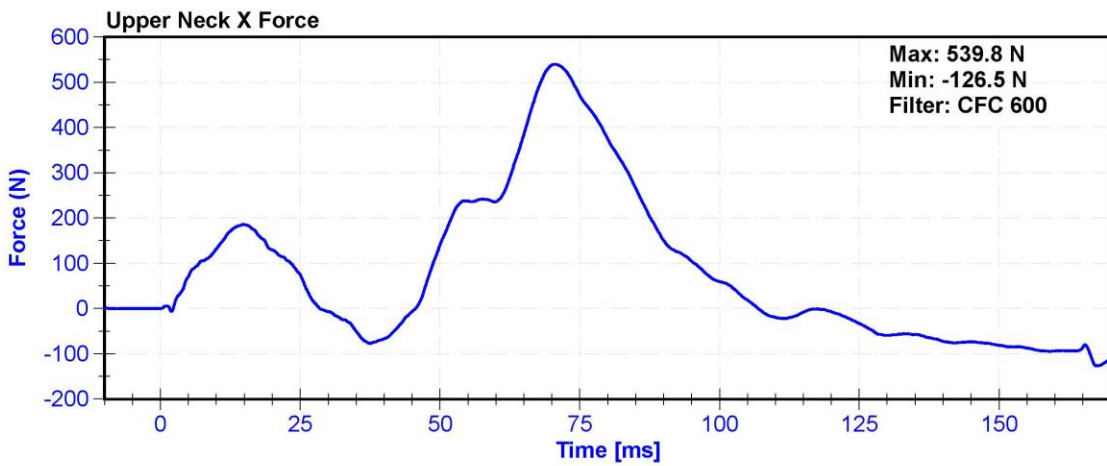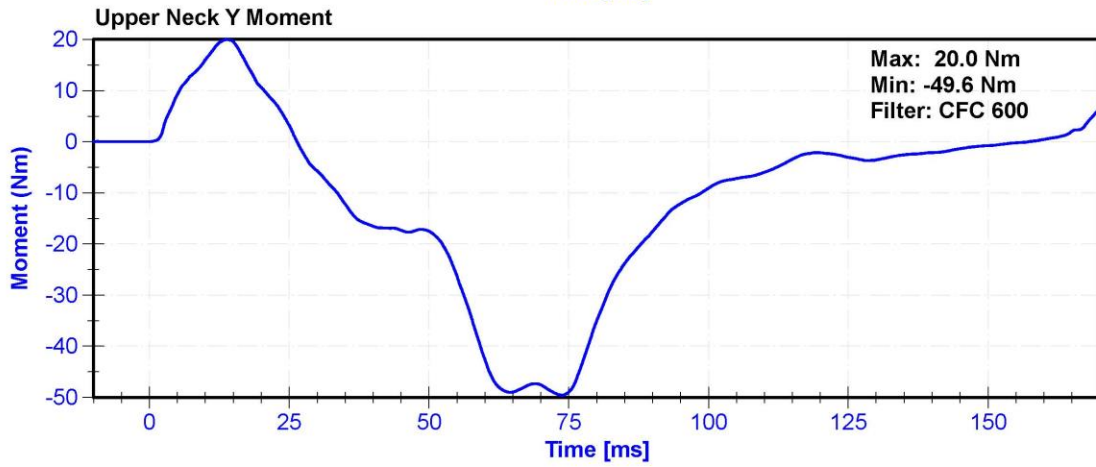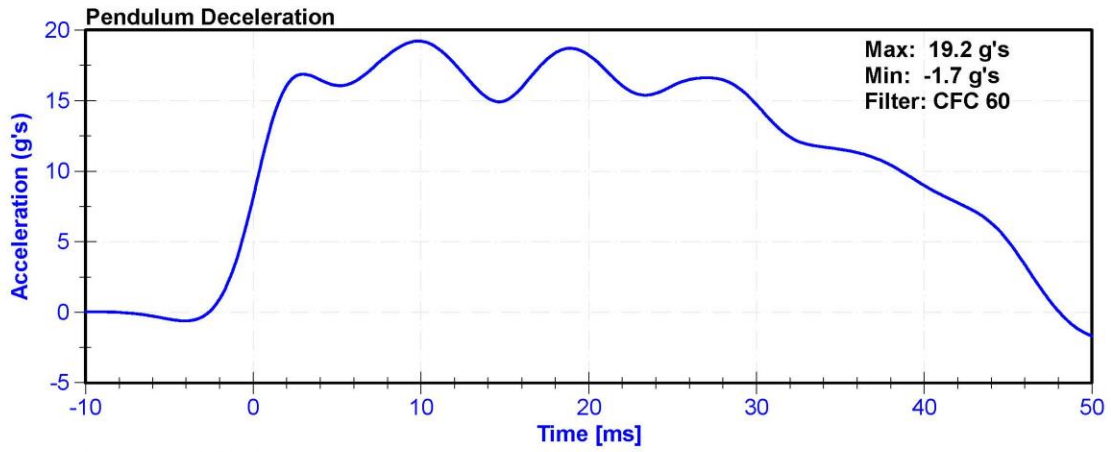


ATD Manufacturer	Denton	Test Technician	D.Reinhard
ATD Serial Number	139	Laboratory Supervisor	K. Brogan



Results



Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	20.9	Pass
Humidity	10	70	%	29	Pass
Velocity	6.59	6.83	m/s	6.641	Pass
Chest Deflection	-58	-50	mm	-50.1	Pass
Maximum Resistive Force (50 to 58mm)	3900	4400	N	4282.9	Pass
Maximum Resistive Force (18 to 50mm)	0	4600	N	4438.4	Pass
Hysteresis	69	85	%	72.2	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	MSI 64C-2000	A279031	5/8/2020	5/8/2021
Chest Potentiometer	SERVO H3CD	DS-503	8/3/2020	2/1/2021

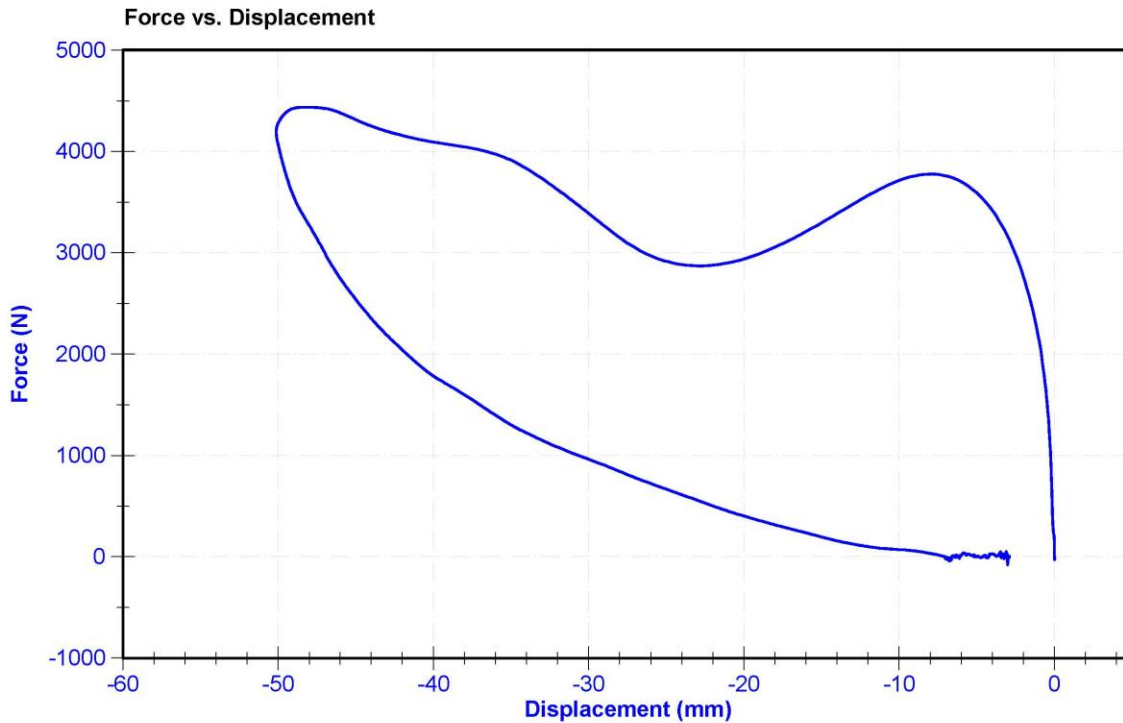

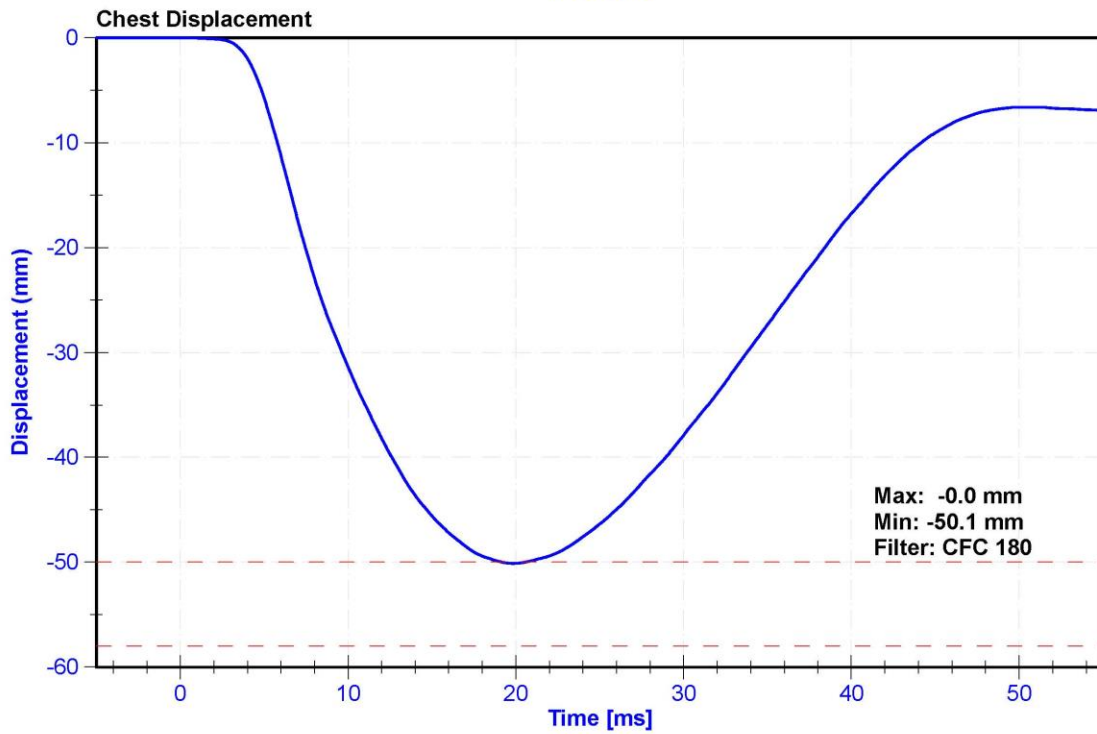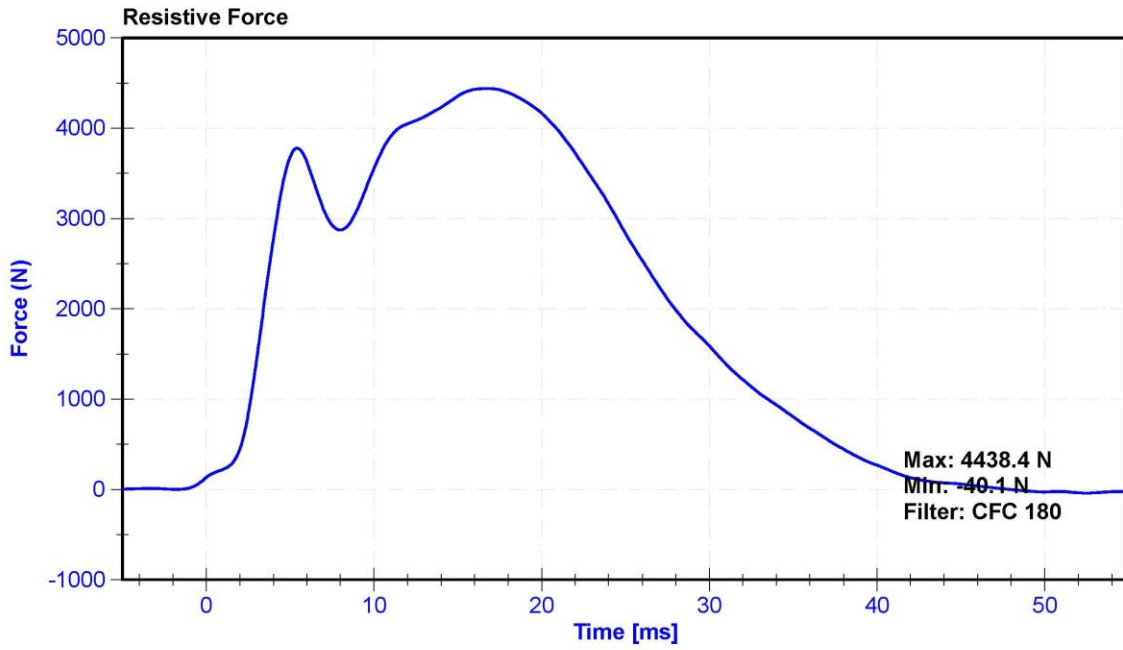

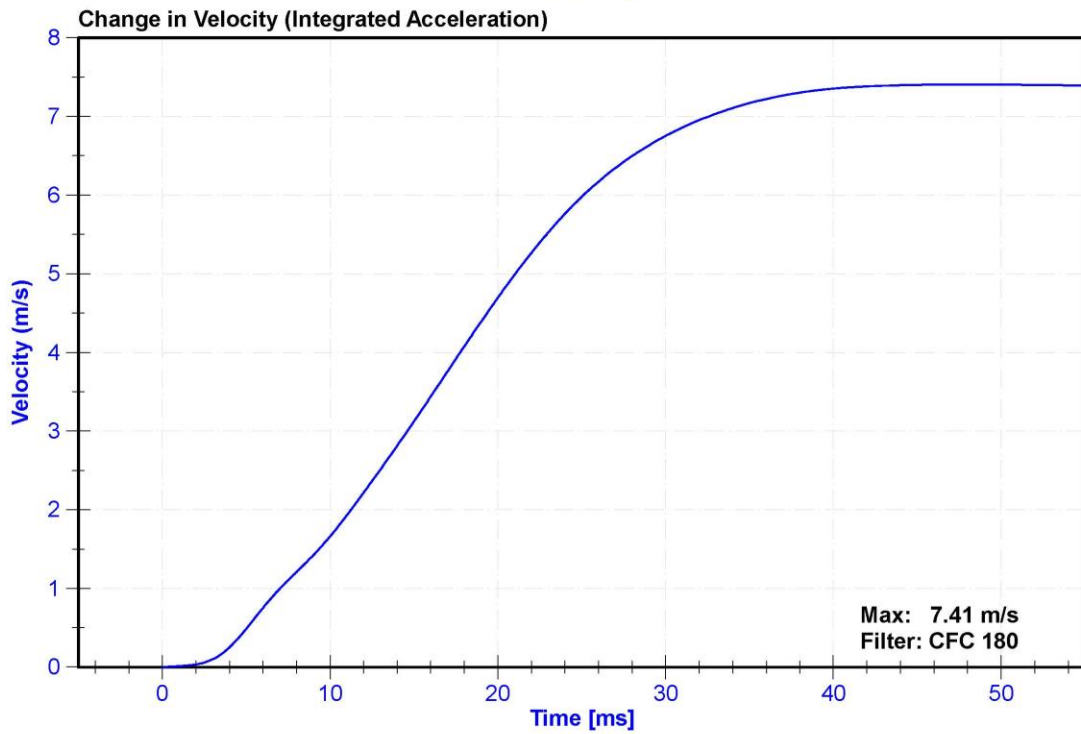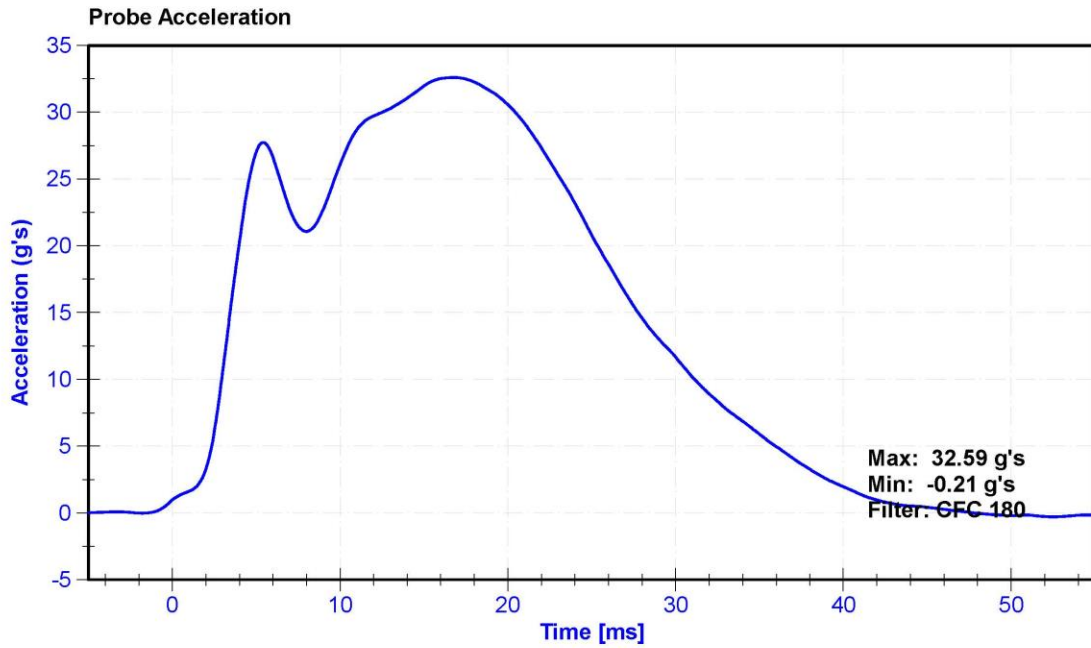


ATD Manufacturer	Denton	Test Technician	K. Dutton
ATD Serial Number	139	Laboratory Supervisor	K. Brogan

Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	18.6	25.6	°C	21.5	Pass
Humidity	10	70	%	29.8	Pass
Initial Angle	0	20	deg	16.0	Pass
Force at 45 Degrees	320	390	N	369.1	Pass
Return Angle Relative to Initial	0	8	deg	2.4	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Potentiometer	Seika.de N4C-1	DS-13051548	12/13/2019	12/12/2020
Load Cell	Interface SML-200	LC-493319	10/8/2020	10/8/2021

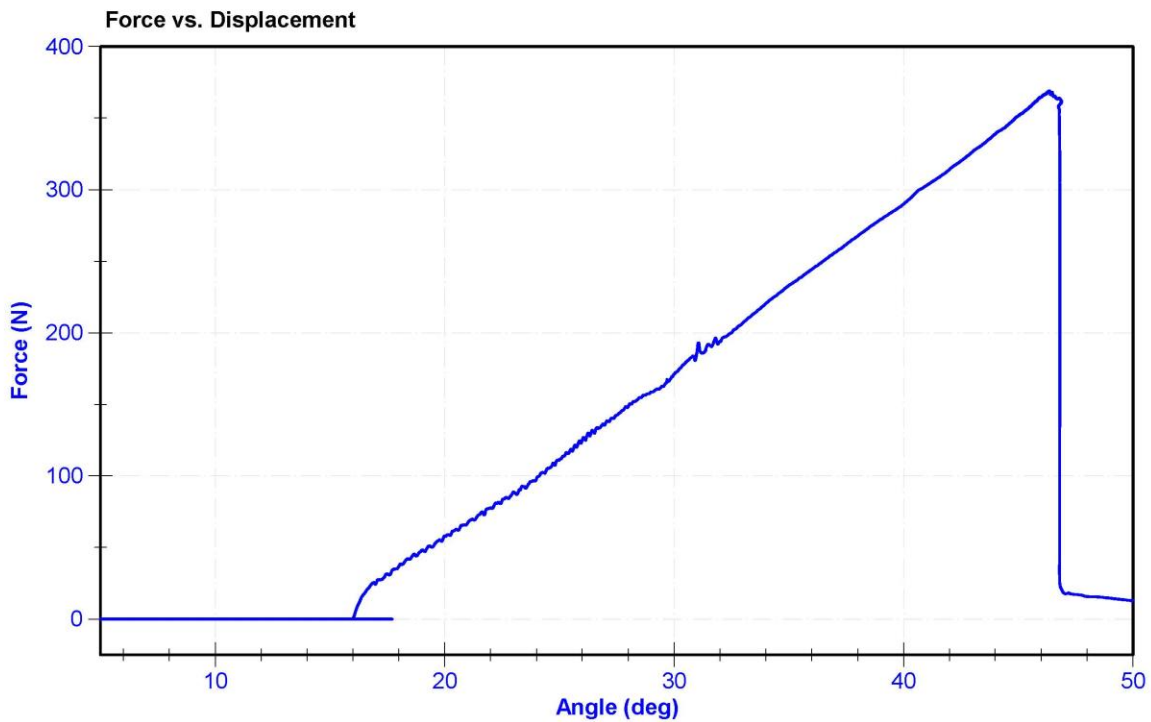


ATD Manufacturer	Denton	Test Technician	S. Vacanti
ATD Serial Number	139	Laboratory Supervisor	K. Brogan



Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	18.9	25.6	°C	21.4	Pass
Humidity	10	70	%	21.0	Pass
Velocity	2.07	2.13	m/s	2.117	Pass
Resistive Force	3450	4060	N	3704.1	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	MSI 64C-2000	A279031	5/8/2020	5/8/2021

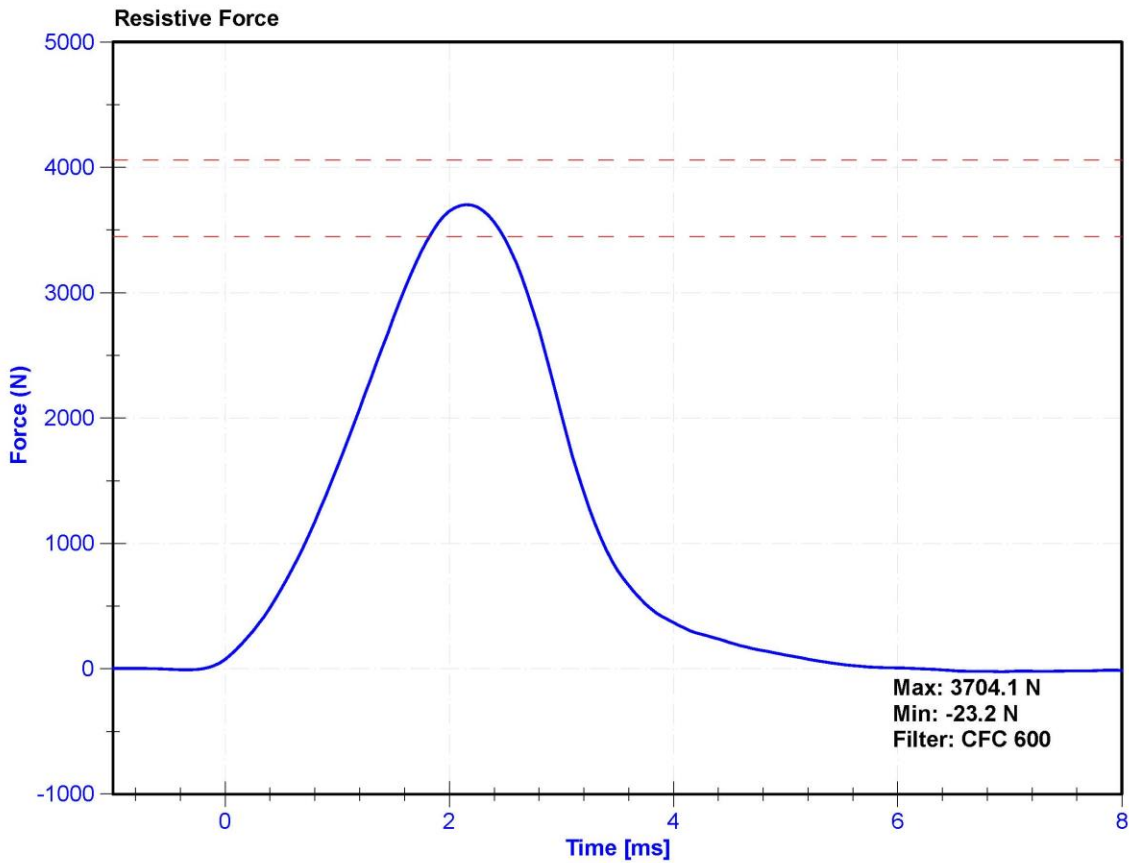

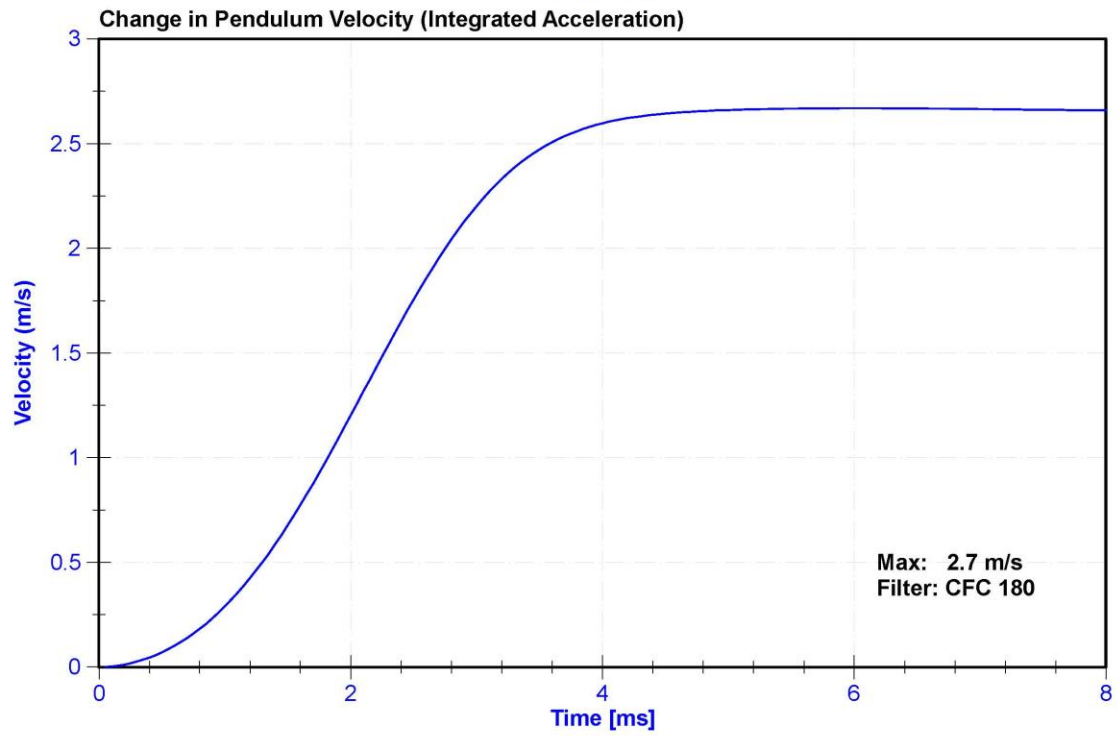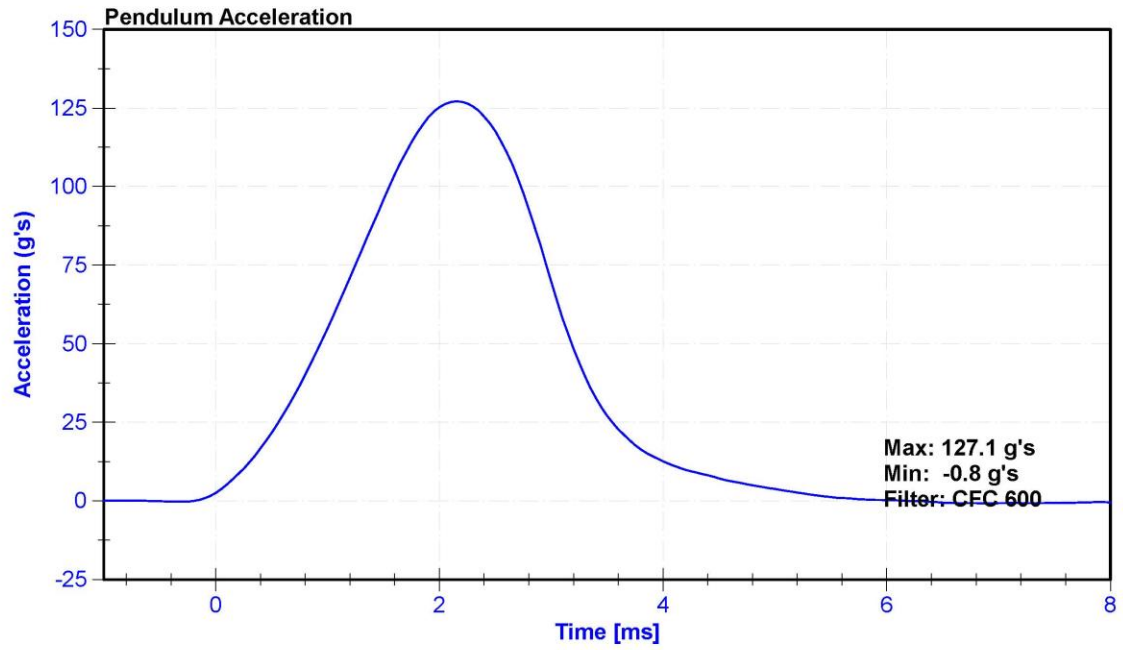


ATD Manufacturer	Denton	Test Technician	S. Vacanti
ATD Serial Number	139	Laboratory Supervisor	K. Brogan



Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	18.9	25.6	°C	21.4	Pass
Humidity	10	70	%	21.0	Pass
Velocity	2.07	2.13	m/s	2.115	Pass
Resistive Force	3450	4060	N	3696.4	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	MSI 64C-2000	A279031	5/8/2020	5/8/2021

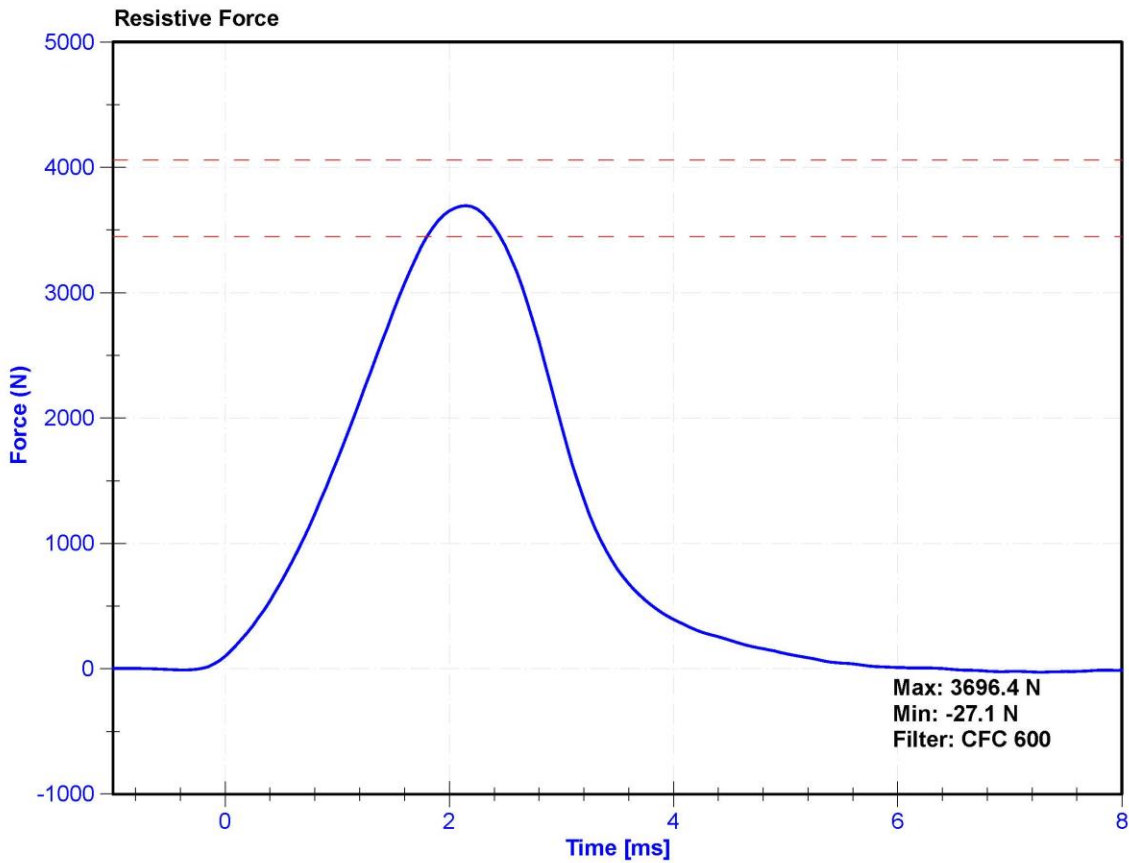

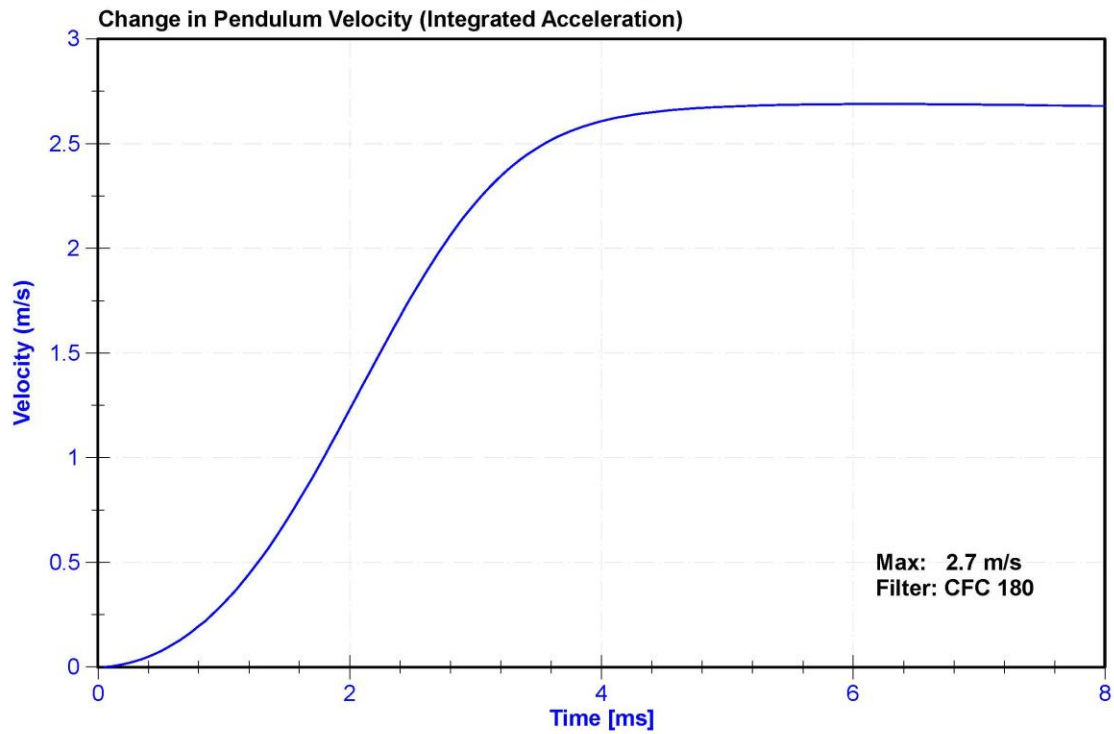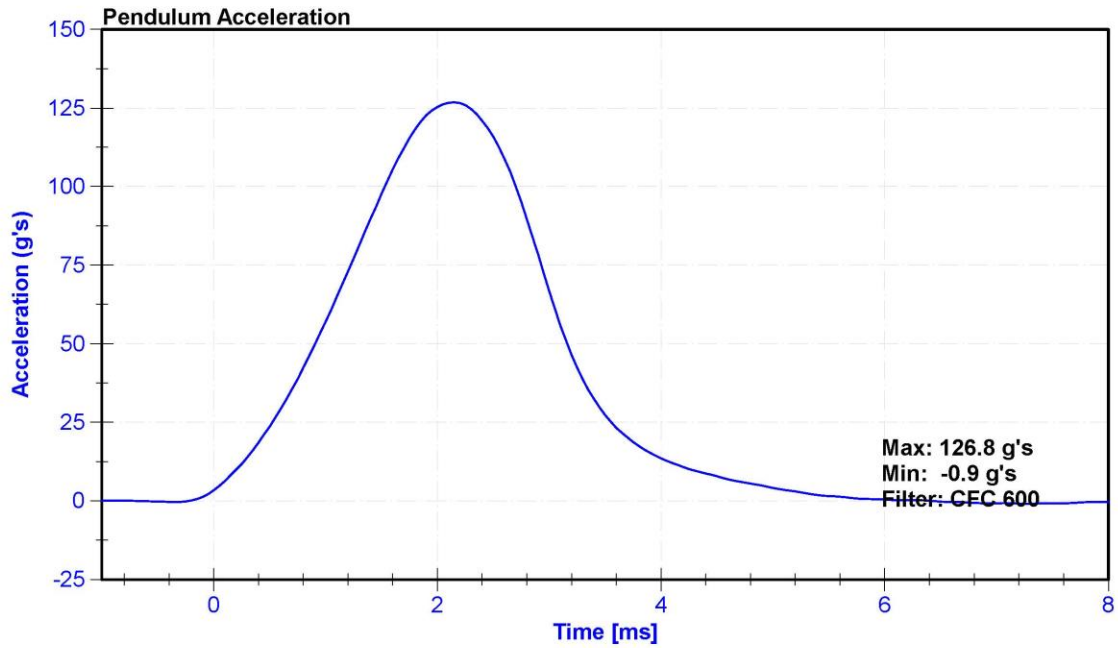

CALIBRATION TEST RESULTS

POST-TEST

HYBRID III 50TH PERCENTILE MALE - DRIVER ATD

SERIAL NO: 142





External Measurements - Hybrid 3 - 50th Male

Technician: K. Dutton

Date: 12/11/2020

Dummy Serial Number: 142

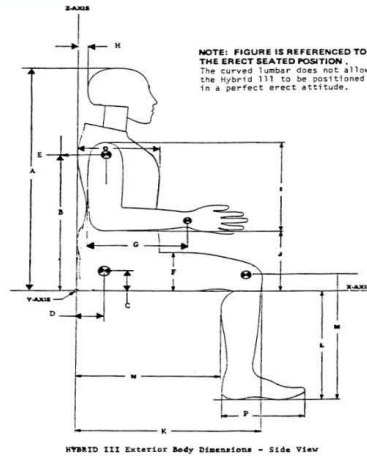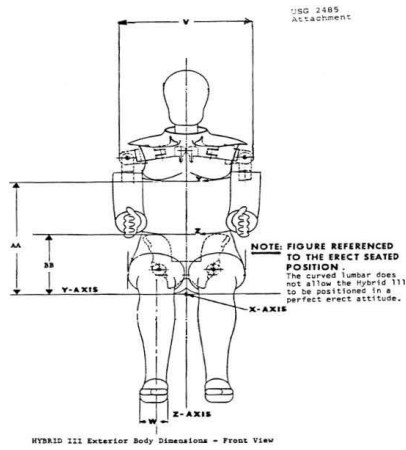

Symbol	Description	Specification (in)		Result (in)	Pass/Fail
A	Sitting Height	34.6	35.0	34.7	Pass
B	Shoulder Pivot Height	19.9	20.5	20.2	Pass
C	H-Point Height	3.3	3.5	3.4	Pass
D	H-Point from Backline	5.3	5.5	5.4	Pass
E	Shoulder Pivot from Backline	3.3	3.7	3.5	Pass
F	Thigh Clearance	5.5	6.1	5.9	Pass
G	Back of Elbow to Wrist Pivot	11.4	12.0	11.7	Pass
H	Head Back to Backline	1.6	1.8	1.7	Pass
I	Shoulder to Elbow Length	13.0	13.6	13.4	Pass
J	Elbow Rest Height	7.5	8.3	8.1	Pass
K	Buttock to Knee Length	22.8	23.8	23.1	Pass
L	Popliteal Height	16.9	17.9	17.4	Pass
M	Knee Pivot Height	19.1	19.7	19.5	Pass
N	Buttock Popliteal Length	17.8	18.8	18.3	Pass
O	Chest Depth without Jacket	8.4	9.0	8.6	Pass
P	Foot Length (right)	9.9	10.5	10.1	Pass
V	Shoulder Breadth	16.3	17.2	16.8	Pass
W	Foot Breadth	3.6	4.2	3.8	Pass
Y	Chest Circumference with Jacket	38.2	39.4	38.8	Pass
Z	Waist Circumference	32.9	34.1	33.7	Pass
AA	Reference Location (Chest Circumference)	16.9	17.1	17.0	Pass
BB	Reference Location (Waist Circumference)	8.9	9.1	9.0	Pass


ATD Manufacturer	Humanetics	Test Technician	E. Helenbrook
ATD Serial Number	142	Laboratory Supervisor	K. Brogan




Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	18.9	25.6	°C	21.5	Pass
Humidity	10	70	%	22.3	Pass
Resultant Acceleration	225	275	g's	243.1	Pass
Oscillation	0	10	%	2.6	Pass
Lateral Acceleration	-15	15	g's	5.9	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
X Accelerometer	ENDEVCO 7264	P51681	11/3/2020	5/4/2021
Y Accelerometer	ENDEVCO 7264	P64151	11/3/2020	5/4/2021
Z Accelerometer	ENDEVCO 7264	P52114	11/3/2020	5/4/2021

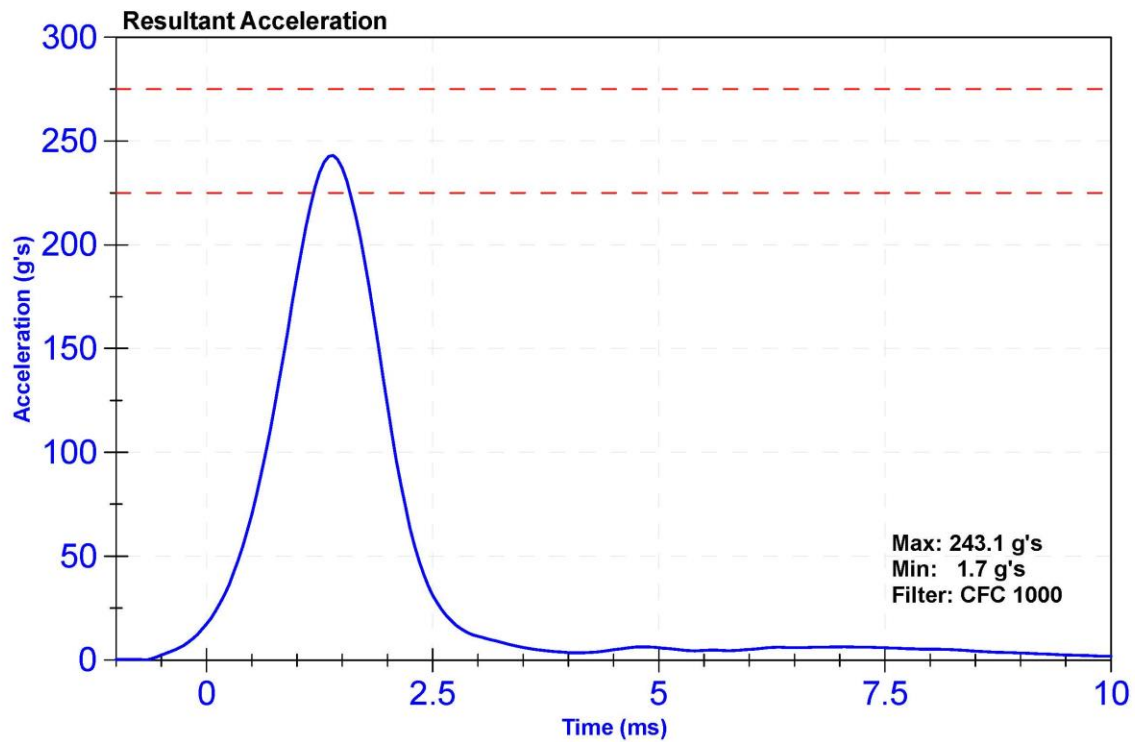

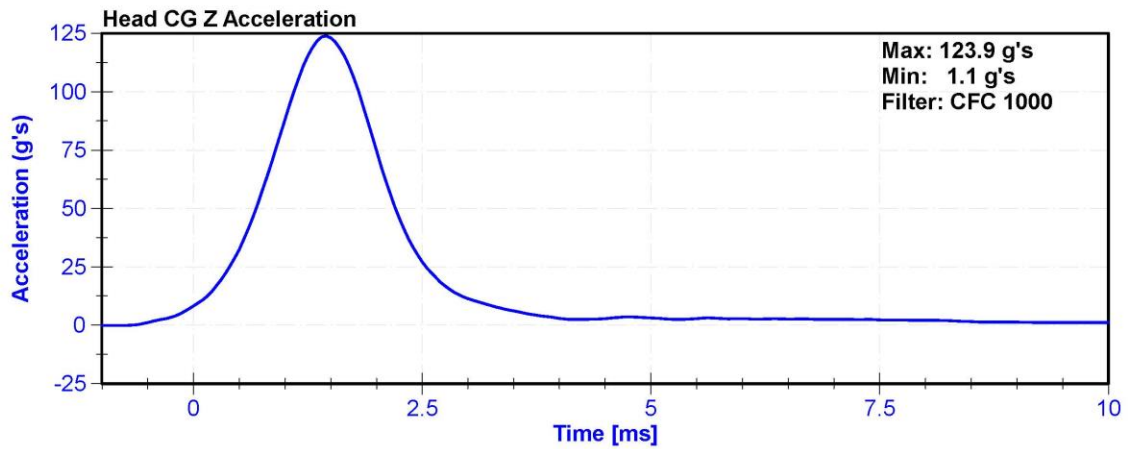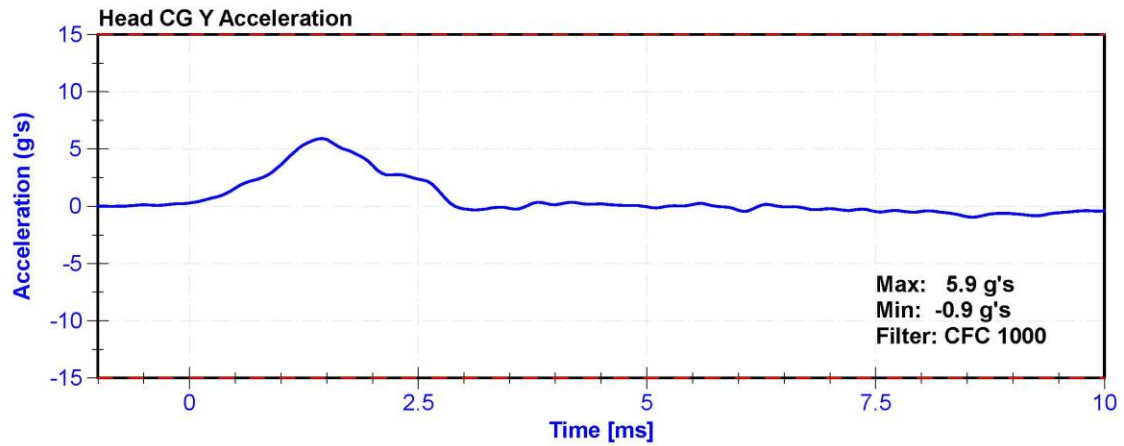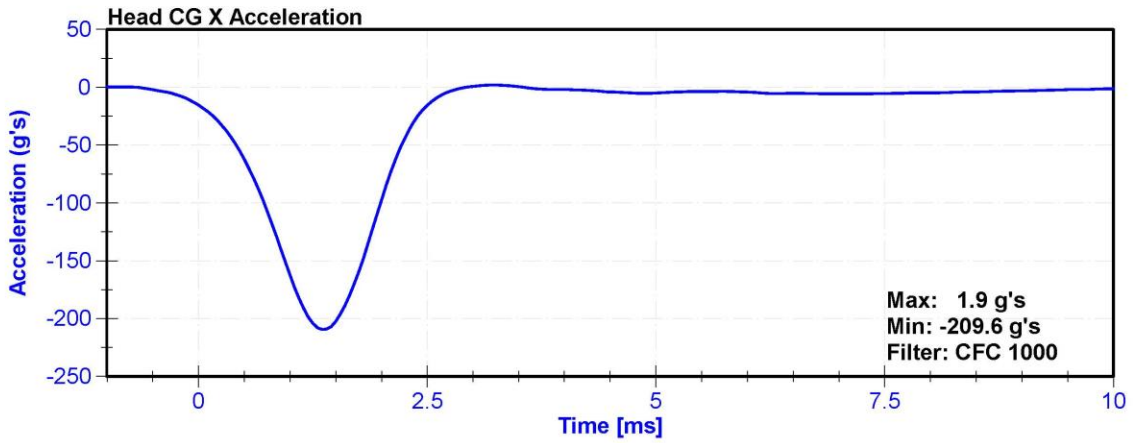



ATD Manufacturer	Humanetics	Test Technician	E. Helenbrook
ATD Serial Number	142	Laboratory Supervisor	K. Brogan




Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21.5	Pass
Humidity	10	70	%	22.2	Pass
Velocity	6.89	7.13	m/s	6.958	Pass
Pendulum Deceleration at 10ms	22.5	27.5	g's	23.07	Pass
Pendulum Deceleration at 20ms	17.6	22.6	g's	20.65	Pass
Pendulum Deceleration at 30ms	12.5	18.5	g's	16.83	Pass
Max. Pendulum Deceleration After 30ms	0	29	g's	26.3	Pass
Pendulum Deceleration Time to 5 g's	34	42	ms	39.5	Pass
Maximum D Plane Rotation	64	78	deg	73.5	Pass
Time to Maximum Rotation	57	64	ms	63.2	Pass
Rotation Decay to Zero	113	127	ms	119.4	Pass
Moment About Occipital Condyle	88.1	108.4	Nm	98.11	Pass
Time to Maximum Moment	47	58	ms	51.5	Pass
Moment Decay to Zero	97	107	ms	105.0	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	ENDEVCO 7231CT	AC-C16503 Striker	2/6/2020	2/5/2021
Pendulum Potentiometer	ETI SP22G	DS-LABPOT1	9/17/2020	9/17/2021
Condyle Potentiometer	ETI SP22G	DS-LABPOT2	9/17/2020	9/17/2021
Upper Neck Load Cell	DENTON 1716A	LC-2186Fx	11/10/2020	11/10/2021

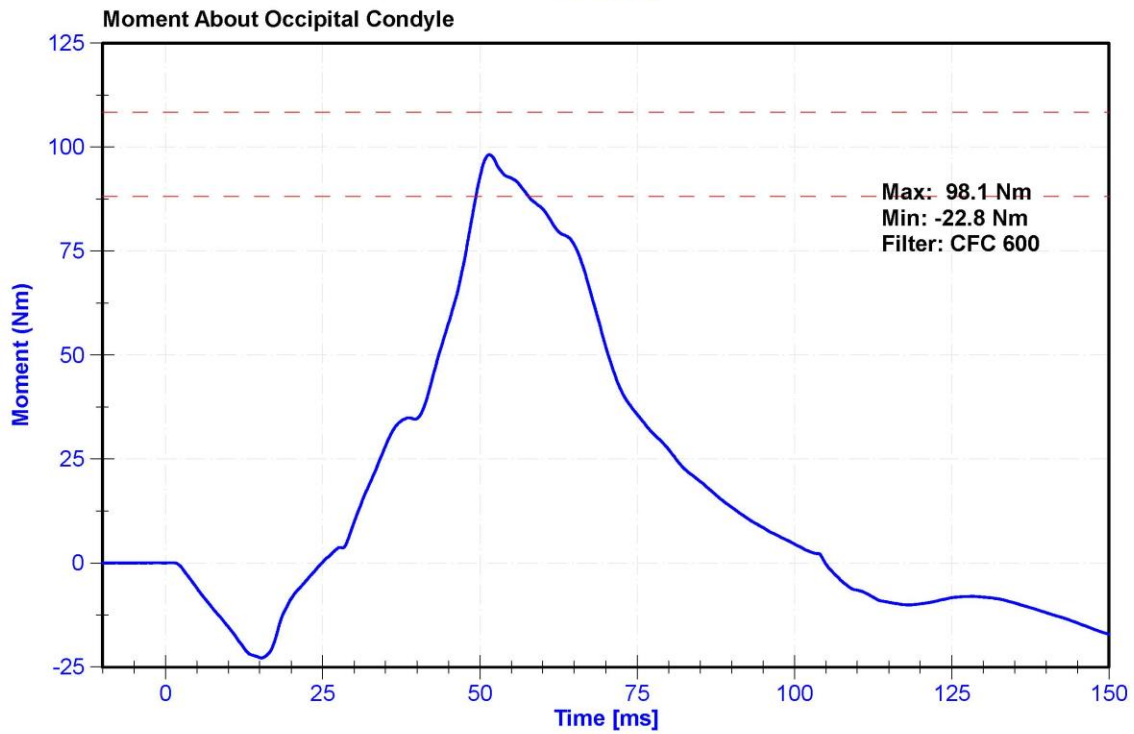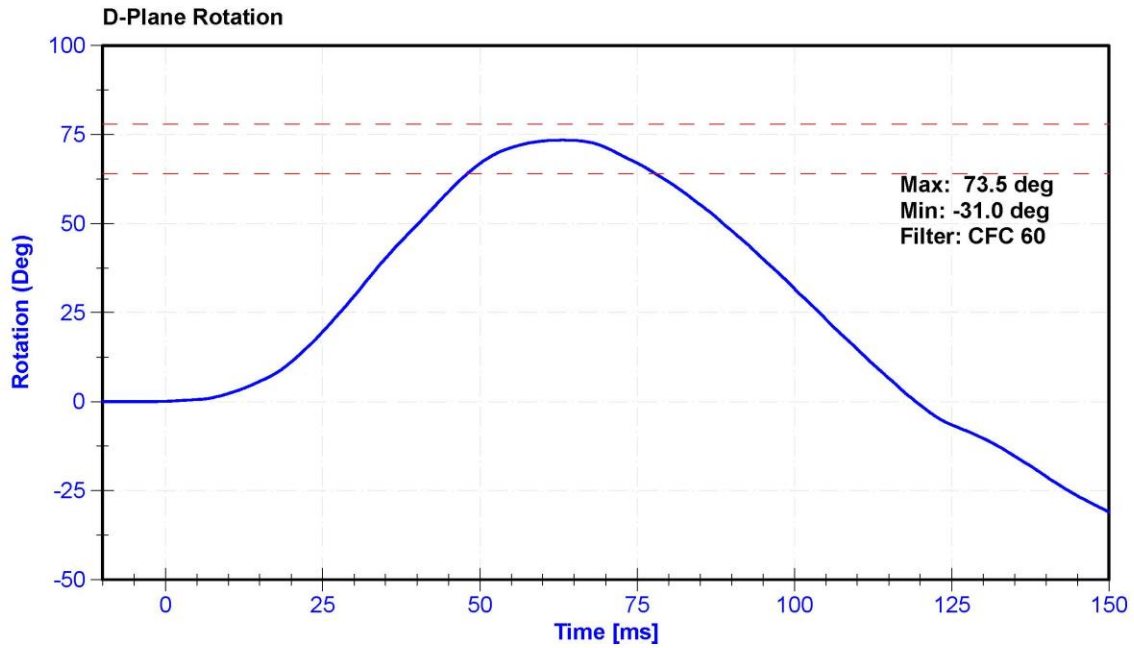

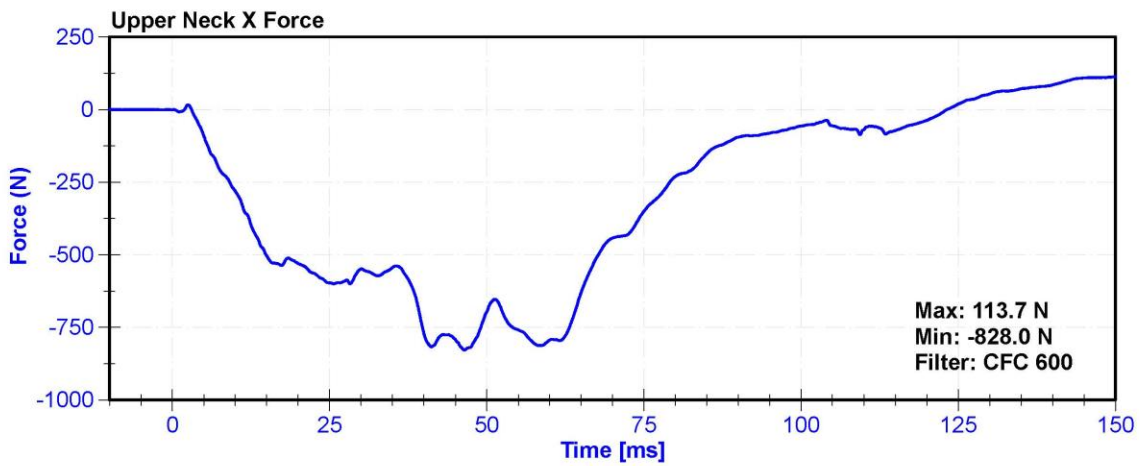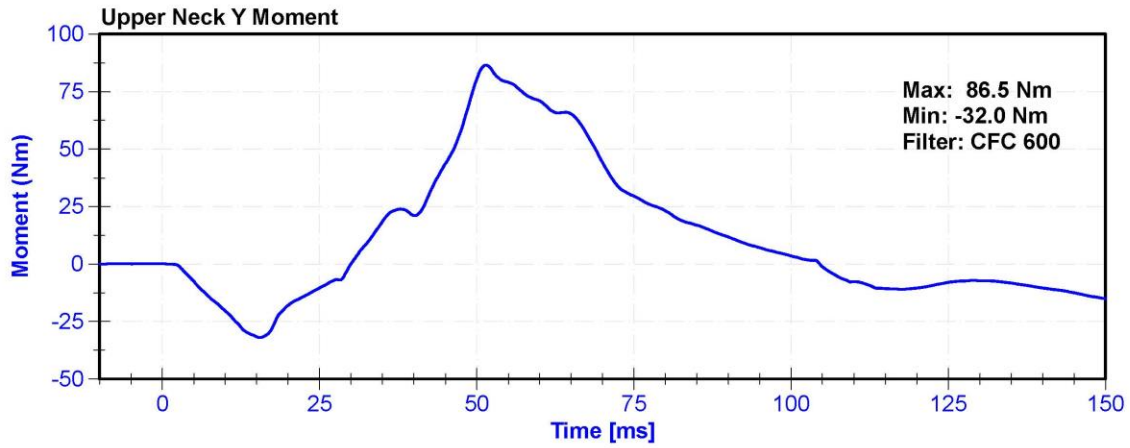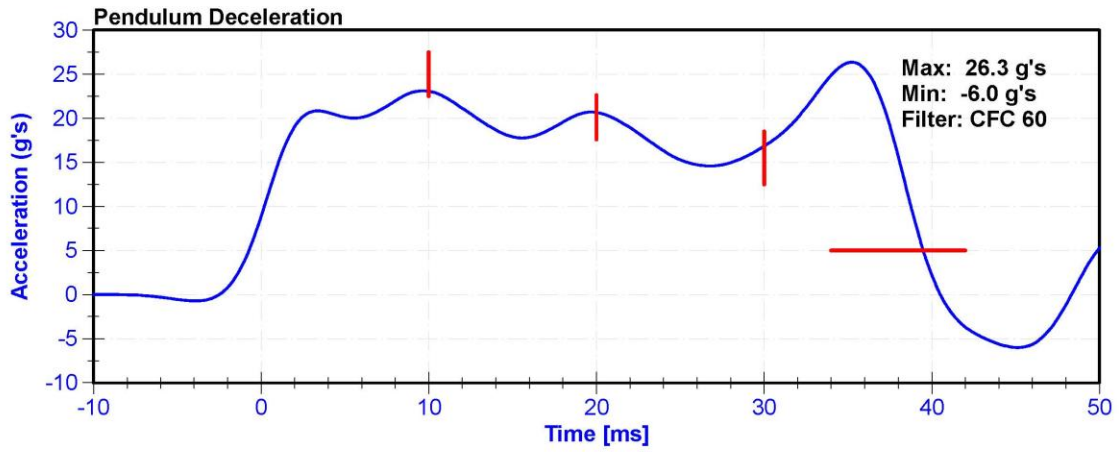



ATD Manufacturer	Humanetics	Test Technician	E. Helenbrook
ATD Serial Number	142	Laboratory Supervisor	K. Brogan




Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21.5	Pass
Humidity	10	70	%	22.3	Pass
Velocity	5.94	6.19	m/s	5.964	Pass
Pendulum Deceleration at 10ms	17.2	21.2	g's	19.57	Pass
Pendulum Deceleration at 20ms	14	19	g's	18.5	Pass
Pendulum Deceleration at 30ms	11	16	g's	15.0	Pass
Max. Pendulum Deceleration After 30ms	0	22	g's	19.6	Pass
Pendulum Deceleration Time to 5 g's	38	46	ms	42.1	Pass
Maximum D Plane Rotation	81	106	deg	99.7	Pass
Time to Maximum Rotation	72	82	ms	78.3	Pass
Rotation Decay to Zero	147	174	ms	157.2	Pass
Minimum Moment About OC	-80	-52.9	Nm	-73.31	Pass
Time to Minimum Moment	65	79	ms	71.5	Pass
Moment Decay to Zero	120	148	ms	140.2	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	ENDEVCO 7231CT	AC-C16503 Striker	2/6/2020	2/5/2021
Pendulum Potentiometer	ETI SP22G	DS-LABPOT1	9/17/2020	9/17/2021
Condyle Potentiometer	ETI SP22G	DS-LABPOT2	9/17/2020	9/17/2021
Upper Neck Load Cell	DENTON 1716A	LC-2186Fx	11/10/2020	11/10/2021

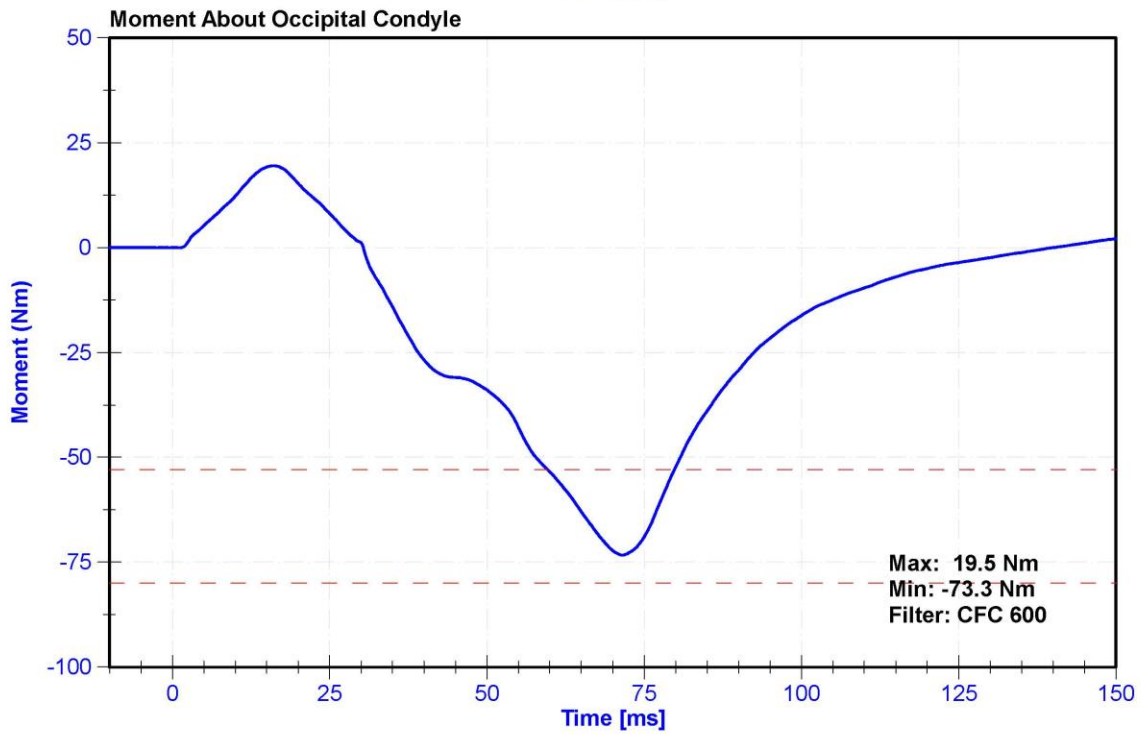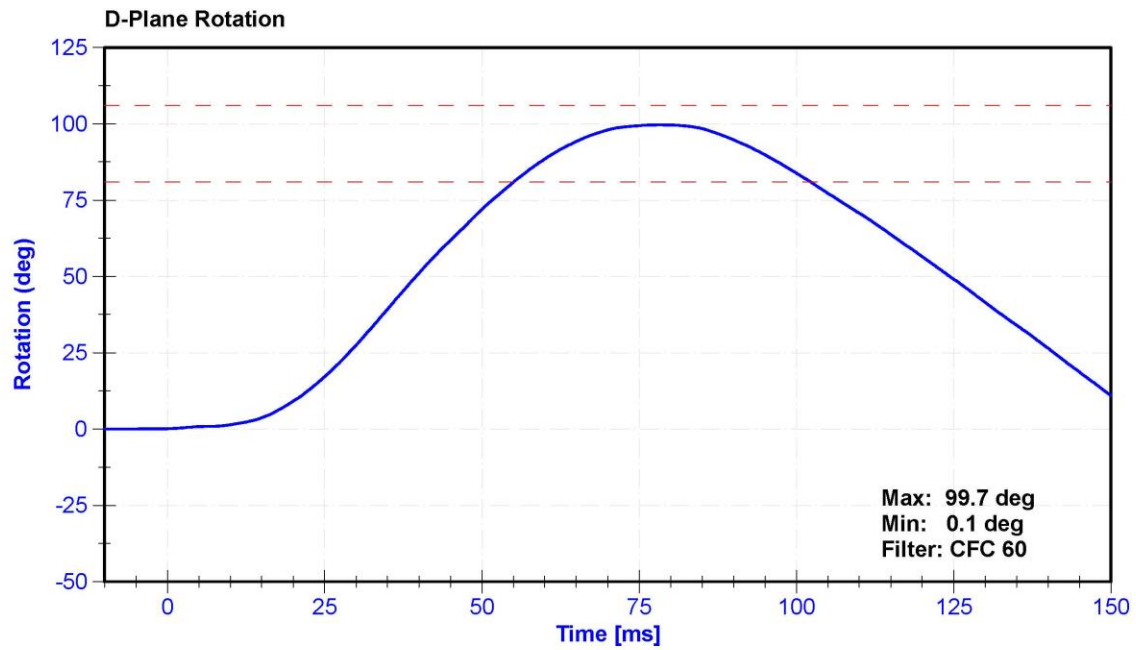

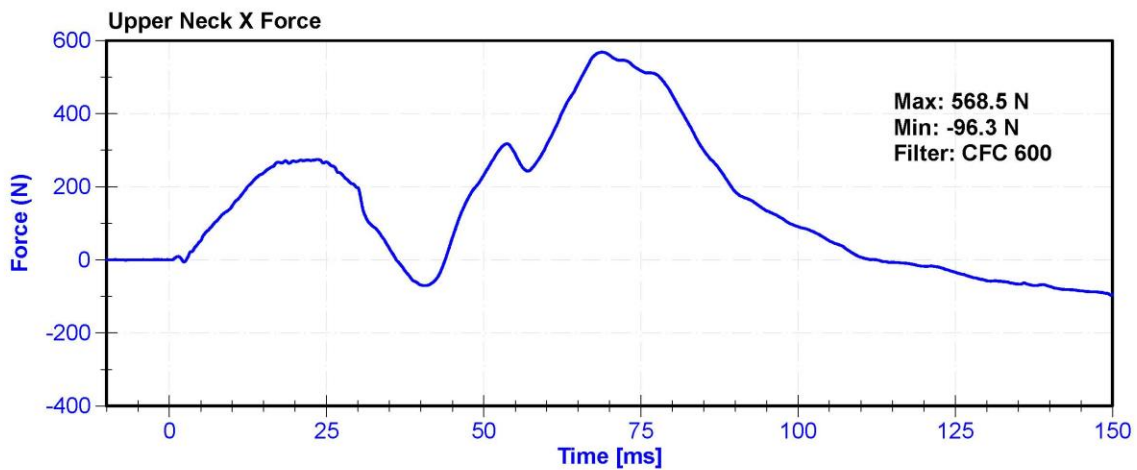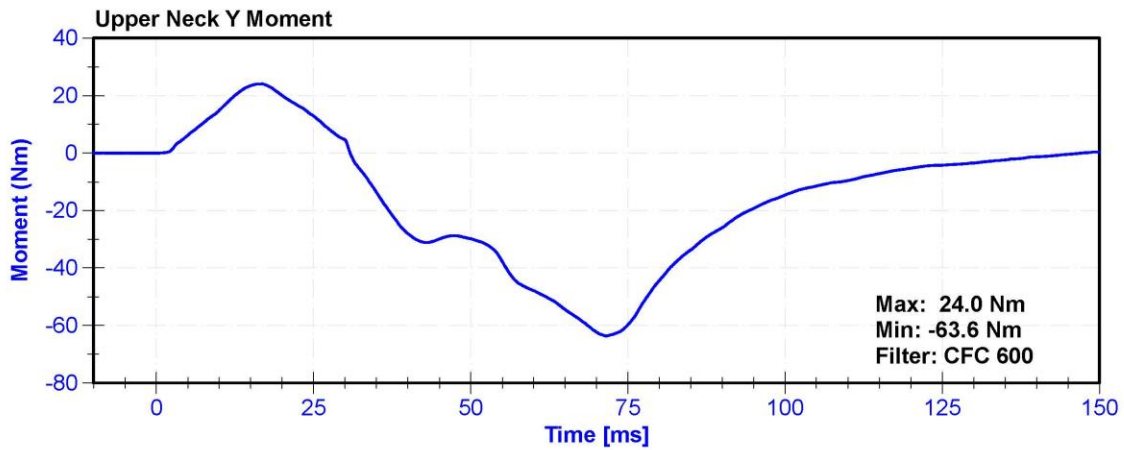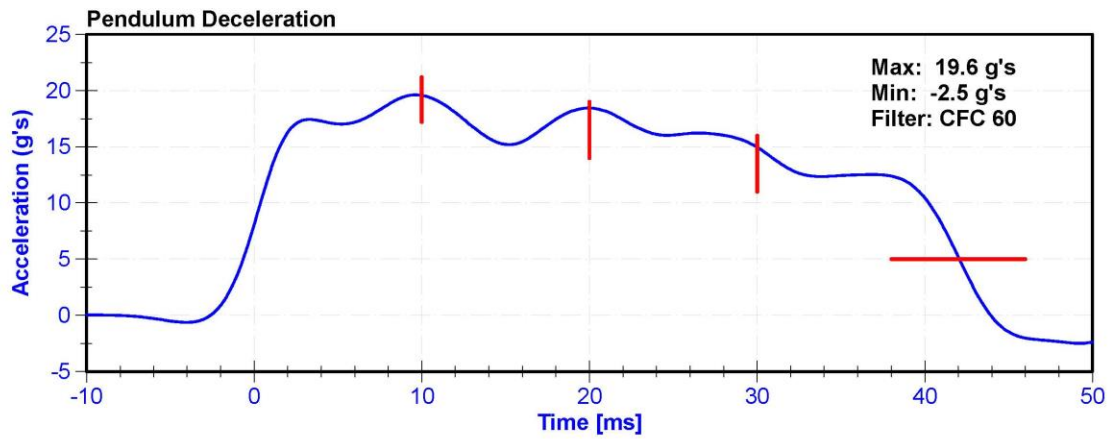


ATD Manufacturer	Humanetics	Test Technician	E. Helenbrook
ATD Serial Number	142	Laboratory Supervisor	K. Brogan



Results



Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	20.6	Pass
Humidity	10	70	%	22.3	Pass
Velocity	6.59	6.83	m/s	6.655	Pass
Chest Displacement	-72.6	-63.5	mm	-69.50	Pass
Resistive Force	5160	5894	N	5688.7	Pass
Hysteresis	65	85	%	70.6	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	MSI 64C-2000	A286228	1/29/2020	1/28/2021
Chest Potentiometer	Servo 6209-2038	DS-142	11/19/2020	5/20/2021

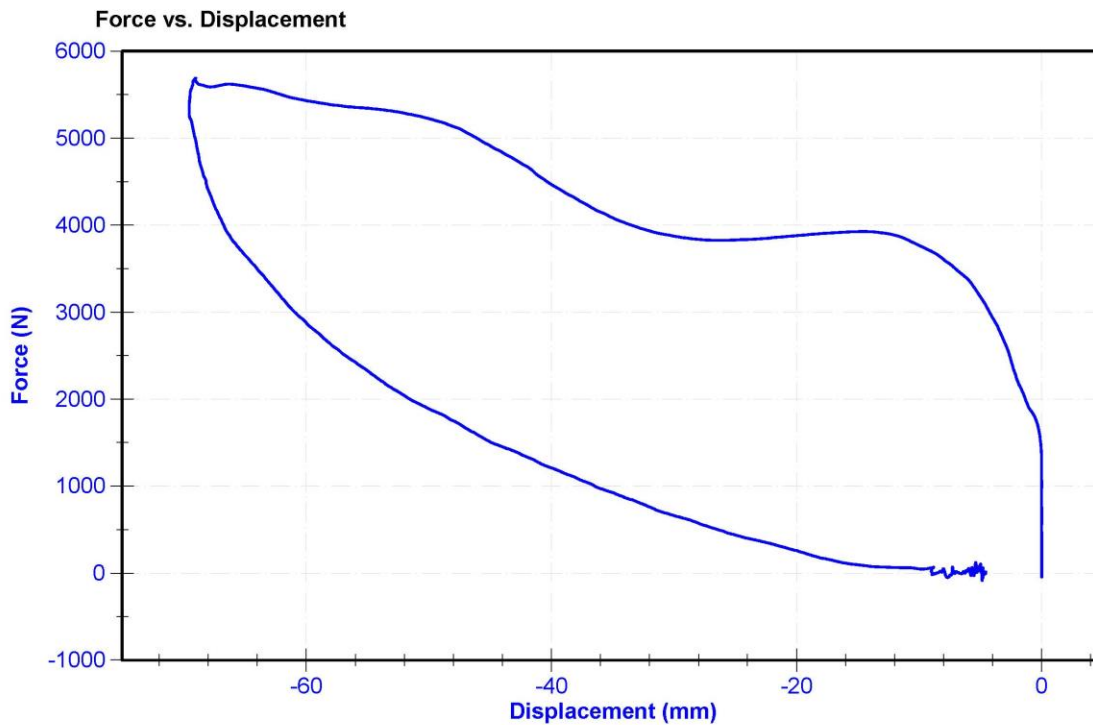

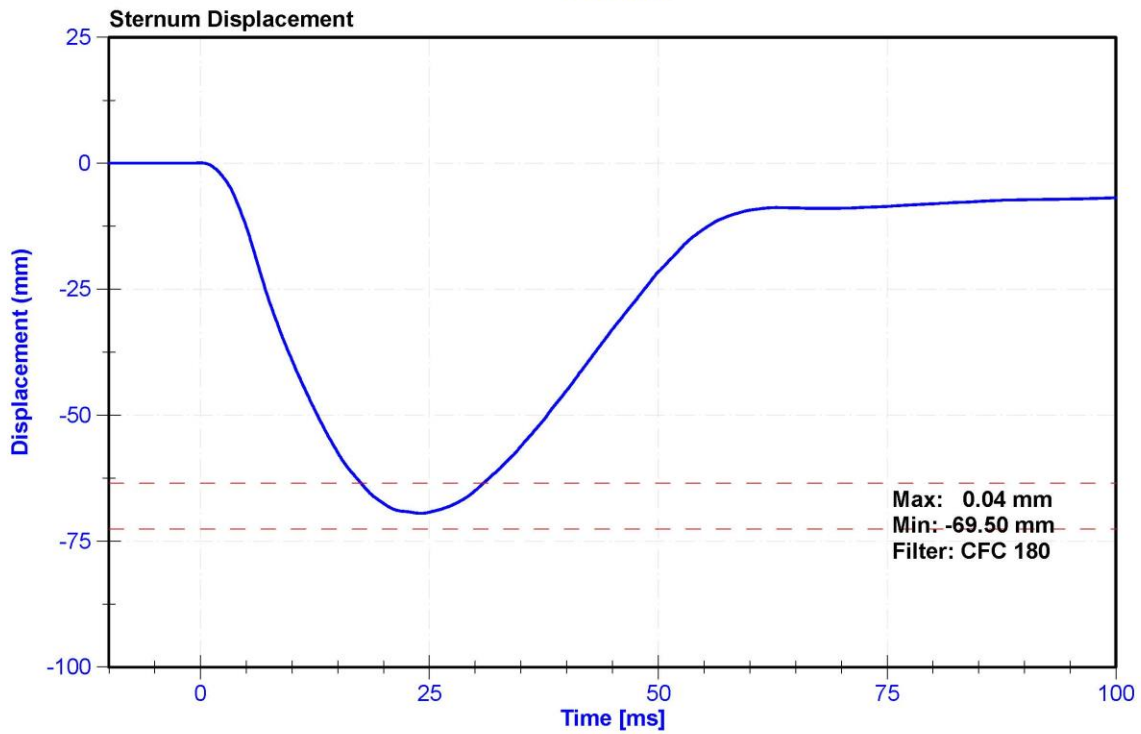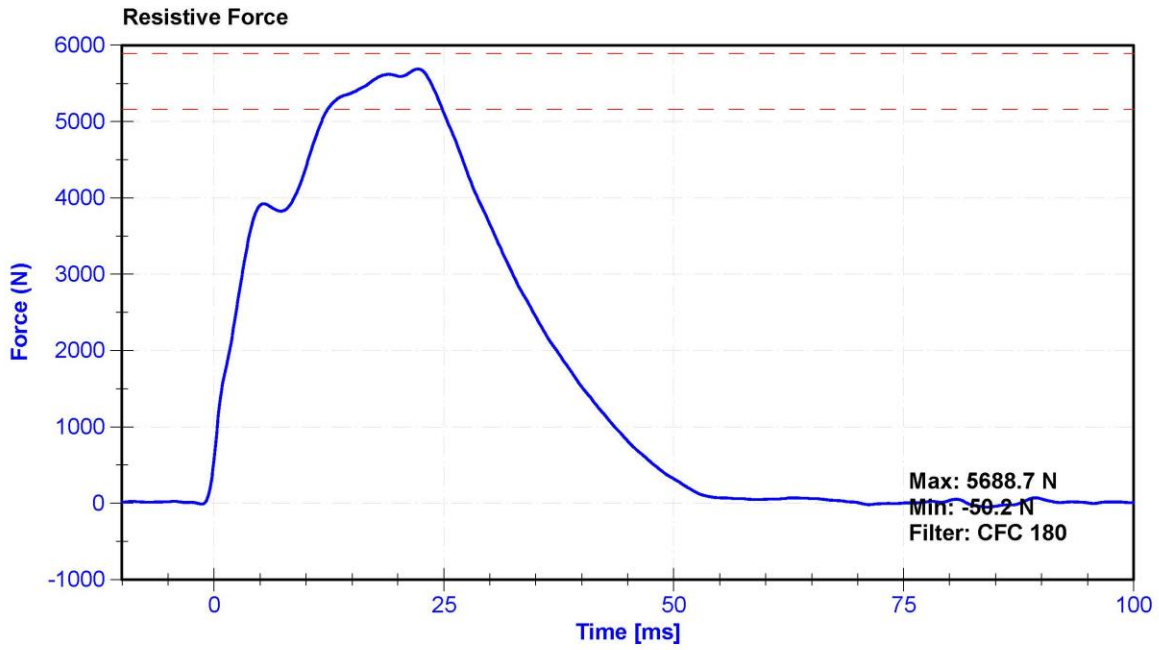

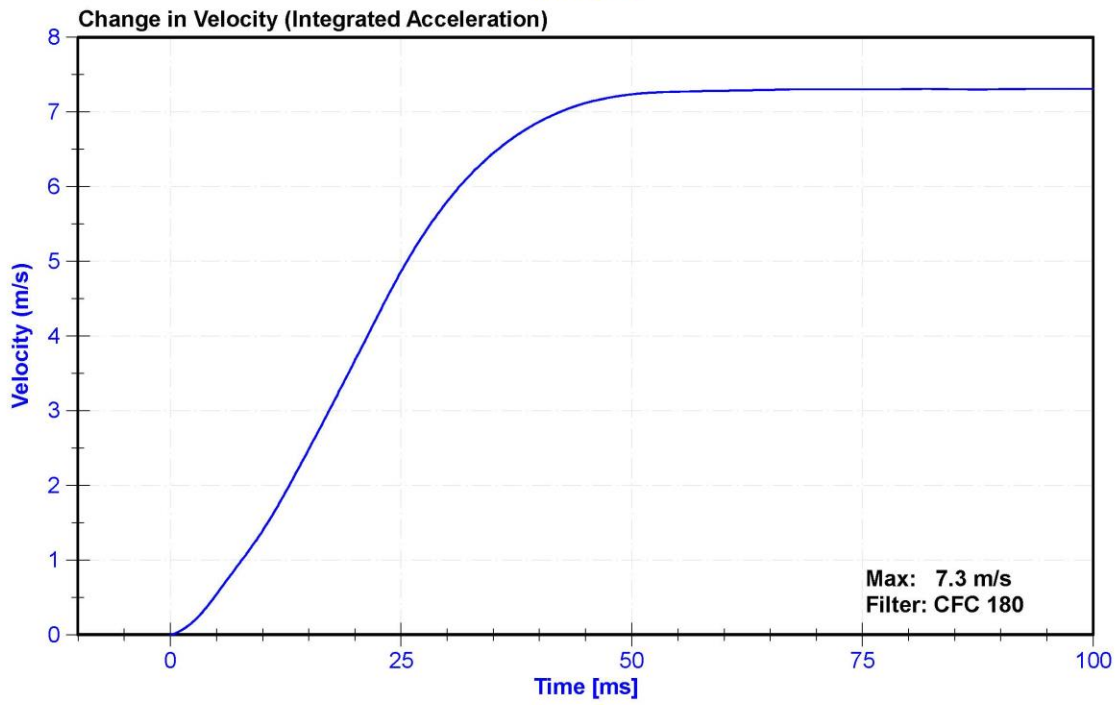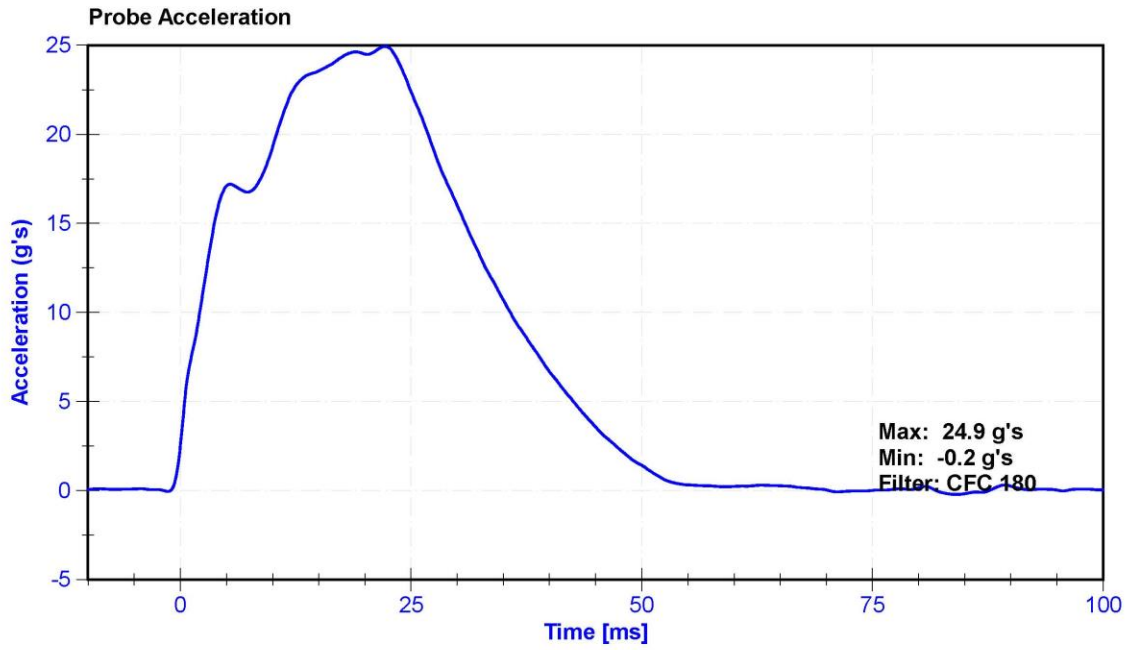


ATD Manufacturer	Humanetics	Test Technician	E. Helenbrook
ATD Serial Number	142	Laboratory Supervisor	K. Brogan

Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	18.9	25.6	°C	21.5	Pass
Humidity	10	70	%	22.3	Pass
Average Velocity	5	10	deg/s	7.2	Pass
Angle at 203Nm	40	50	deg	42.9	Pass
Moment at 30 degrees	0	94.9	Nm	92.8	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Potentiometer	ETI SP22	DS-0008	9/18/2020	9/18/2021
Load Cell	Key Trans 2301-02	LC-115 My	9/12/2020	9/12/2021

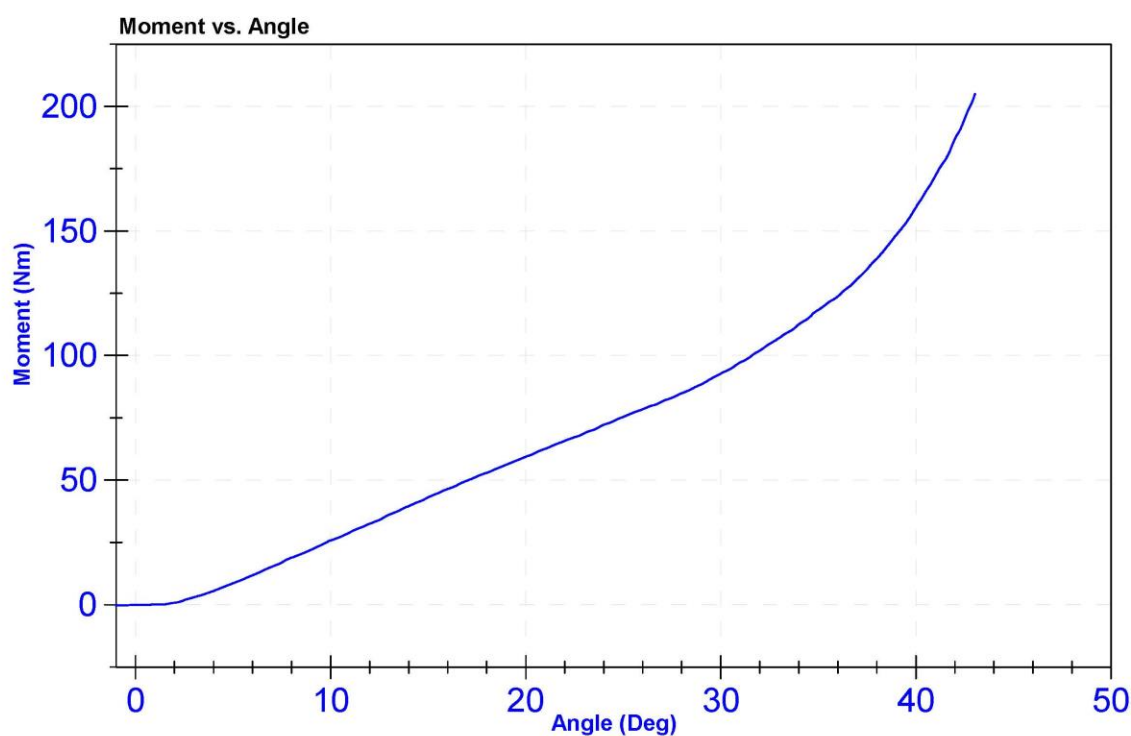


ATD Manufacturer	Humanetics	Test Technician	E. Helenbrook
ATD Serial Number	142	Laboratory Supervisor	K. Brogan

Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	18.9	25.6	°C	21.5	Pass
Humidity	10	70	%	22.3	Pass
Average Velocity	5	10	deg/s	7.2	Pass
Angle at 203Nm	40	50	deg	45.6	Pass
Moment at 30 degrees	0	94.9	Nm	93.8	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Potentiometer	ETI SP22	DS-0008	9/18/2020	9/18/2021
Load Cell	Key Trans 2301-02	LC-115 My	9/12/2020	9/12/2021

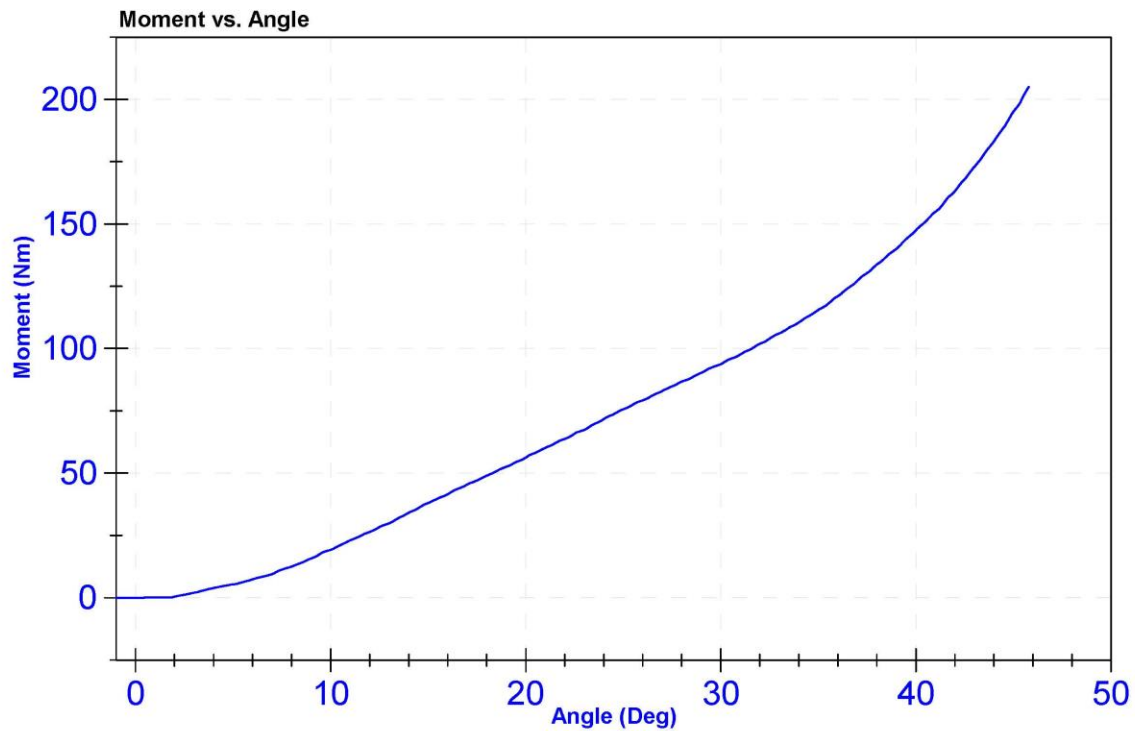


ATD Manufacturer	Humanetics	Test Technician	E. Helenbrook
ATD Serial Number	142	Laboratory Supervisor	K. Brogan



Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	18.9	25.6	°C	21.6	Pass
Humidity	10	70	%	22.3	Pass
Velocity	2.07	2.13	m/s	2.093	Pass
Maximum Resistive Force	4720	5780	N	5687.7	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	MSI 64C-2000	A279031	5/8/2020	5/8/2021

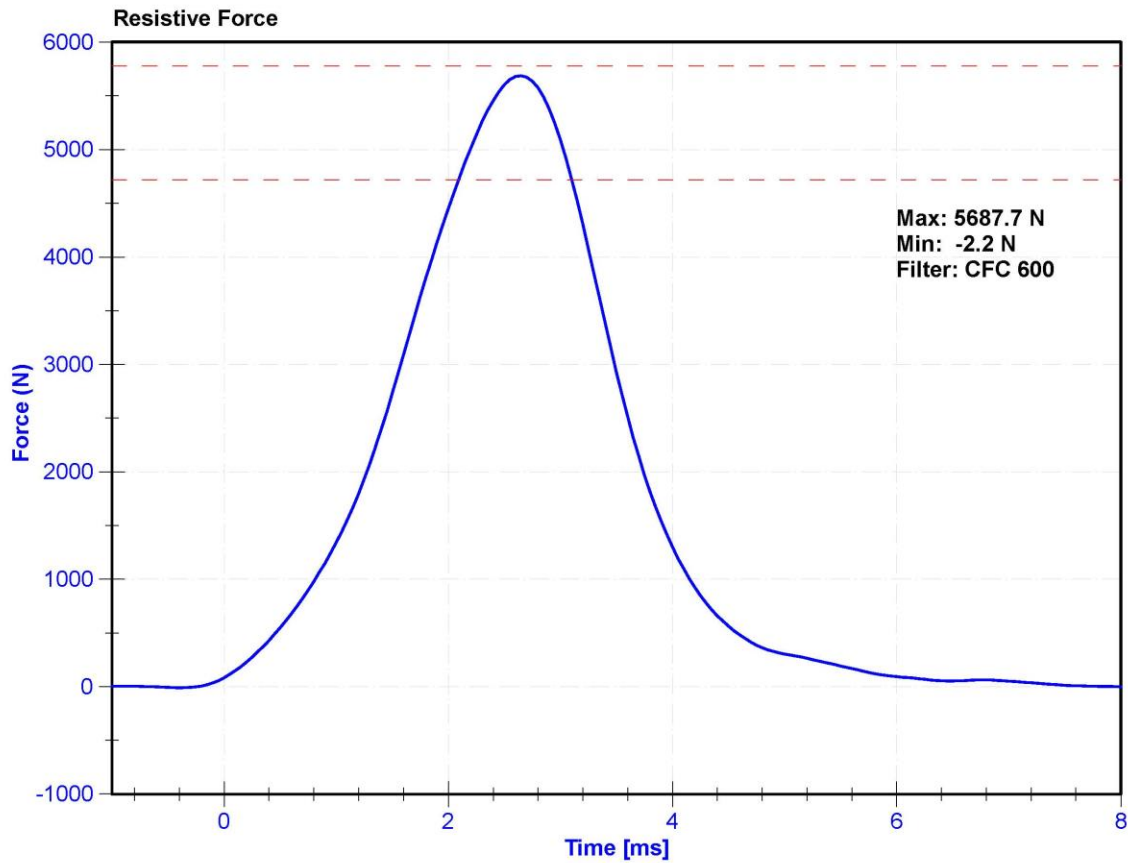

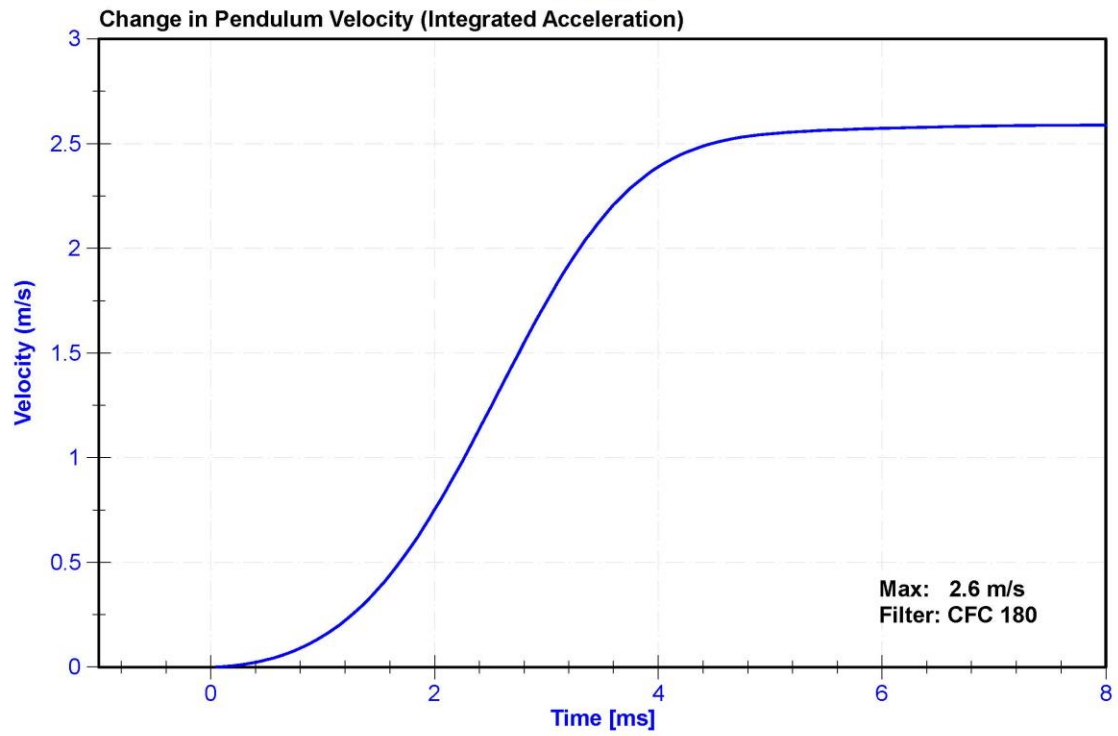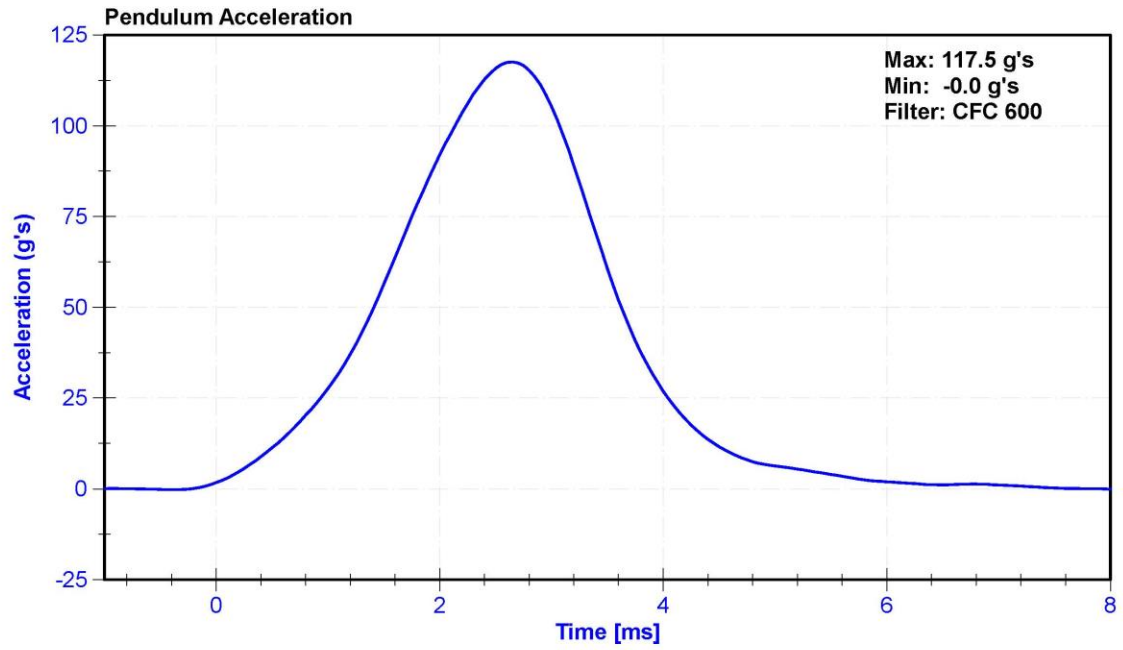


ATD Manufacturer	Humanetics	Test Technician	E. Helenbrook
ATD Serial Number	142	Laboratory Supervisor	K. Brogan



Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	18.9	25.6	°C	21.6	Pass
Humidity	10	70	%	22.3	Pass
Velocity	2.07	2.13	m/s	2.096	Pass
Maximum Resistive Force	4720	5780	N	5521.5	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	MSI 64C-2000	A286228	1/29/2020	1/28/2021

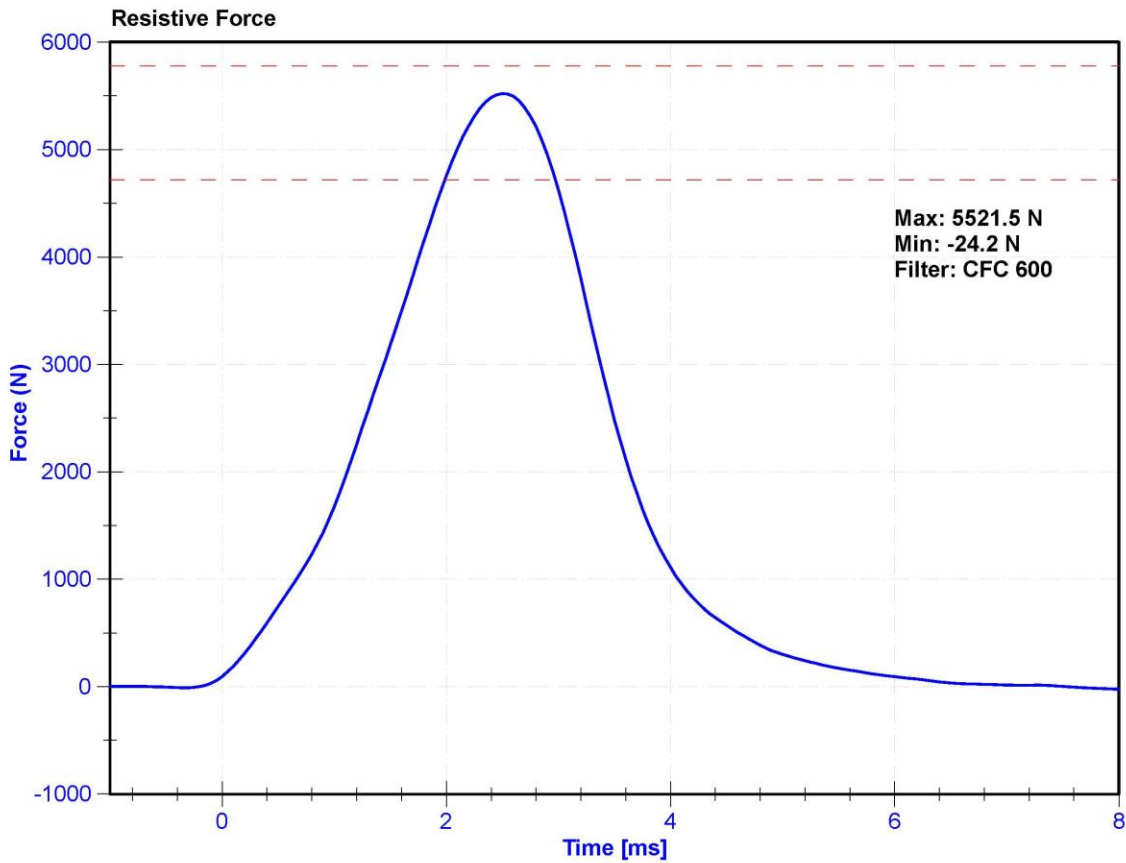

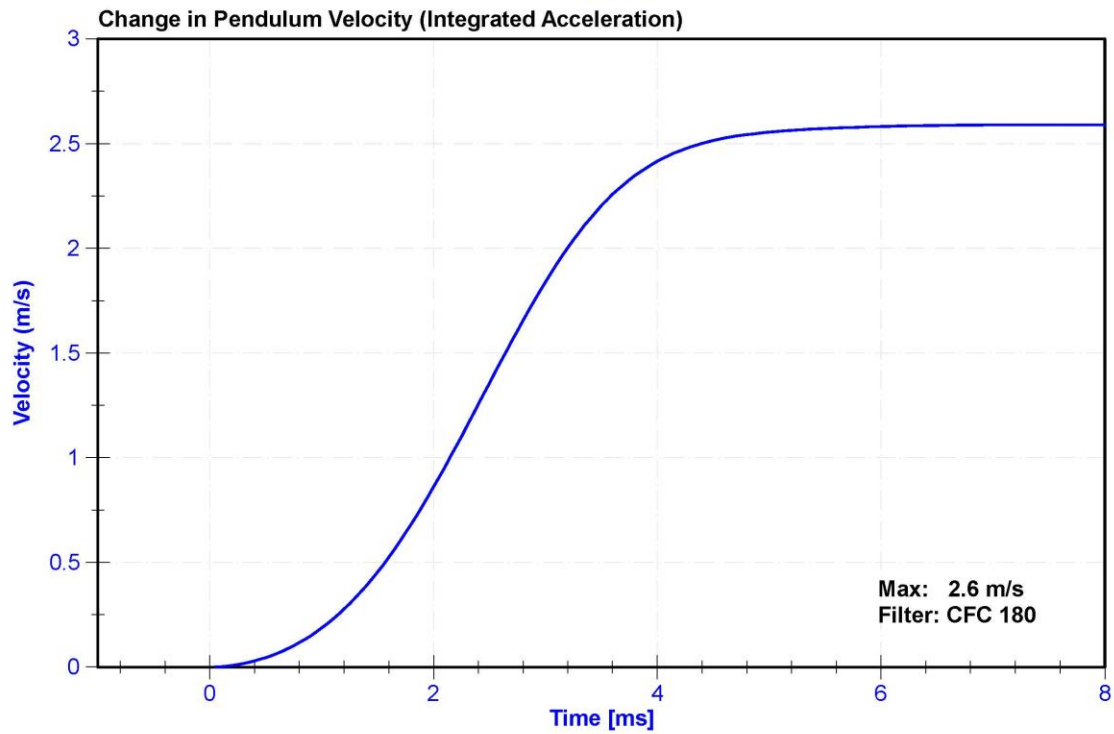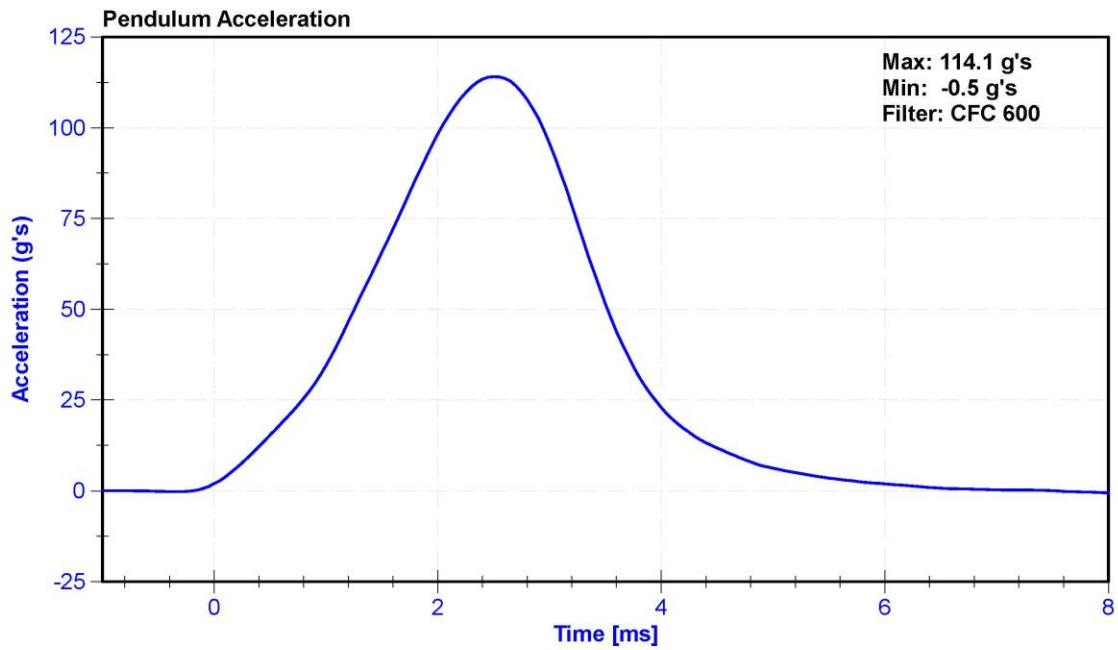

CALIBRATION TEST RESULTS

POST-TEST

HYBRID III 5TH PERCENTILE FEMALE - PASSENGER ATD

SERIAL NO: 139




External Measurements - Hybrid 3 - 5th Female

Technician: K. Brogan

Date: 12/14/2020

Dummy Serial Number: 139

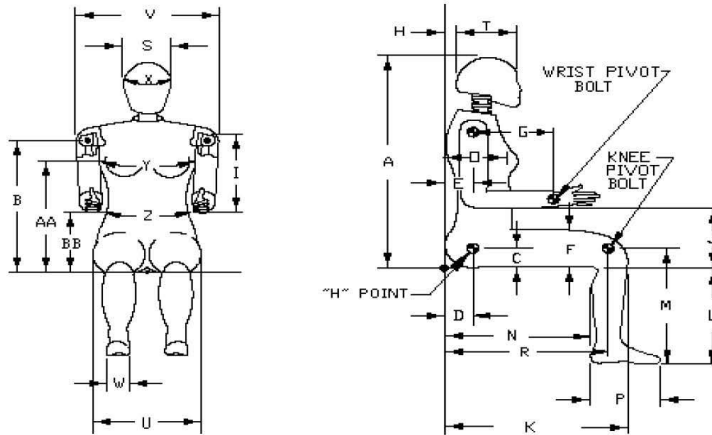

Symbol	Description	Specification (mm)		Result (mm)	Pass/Fail
A	Sitting Height	775	800	789	Pass
B	Shoulder Pivot Height	432	457	446	Pass
C	H-Point Height	81	86	84	Pass
D	H-Point from Backline	145	150	146	Pass
E	Shoulder Pivot from Backline	69	84	77	Pass
F	Thigh Clearance	119	135	128	Pass
G	Back of Elbow to Wrist Pivot	244	259	254	Pass
H	Head Back to Backline	43	48	45	Pass
I	Shoulder to Elbow Length	277	297	287	Pass
J	Elbow Rest Height	183	203	195	Pass
K	Buttock to Knee Length	521	546	539	Pass
L	Popliteal Height	356	376	363	Pass
M	Knee Pivot Height	394	419	402	Pass
N	Buttock Popliteal Length	414	439	425	Pass
O	Chest Depth without Jacket	175	191	185	Pass
P	Foot Length (right)	219	234	224	Pass
R	Buttock To Knee Pivot Length	457	483	475	Pass
S	Head Breadth	137	147	143	Pass
T	Head Depth	178	188	182	Pass
U	Hip Breadth	300	315	309	Pass
V	Shoulder Breadth	351	366	362	Pass
W	Foot Breadth	79	94	87	Pass
X	Head Circumference	528	549	535	Pass
Y	Chest Circumference with Jacket	851	881	861	Pass
Z	Waist Circumference	460	790	773	Pass
AA	Reference Location (Chest Circumference)	333	358	345	Pass
BB	Reference Location (Waist Circumference)	160	170	165	Pass


ATD Manufacturer	Denton	Test Technician	E. Helenbrook
ATD Serial Number	139	Laboratory Supervisor	K. Brogan




Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	18.9	25.6	°C	21.5	Pass
Humidity	10	70	%	22.3	Pass
Resultant Acceleration	250	300	g's	259.7	Pass
Oscillation	0	10	%	2.1	Pass
Lateral Acceleration	-15	15	g's	-2.8	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
X Accelerometer	ENDEVCO 7264CT	AC-P58780	11/4/2020	5/5/2021
Y Accelerometer	ENDEVCO 7264	AC-P83320	11/4/2020	5/5/2021
Z Accelerometer	ENDEVCO 7264CT	AC-P58997	11/4/2020	5/5/2021

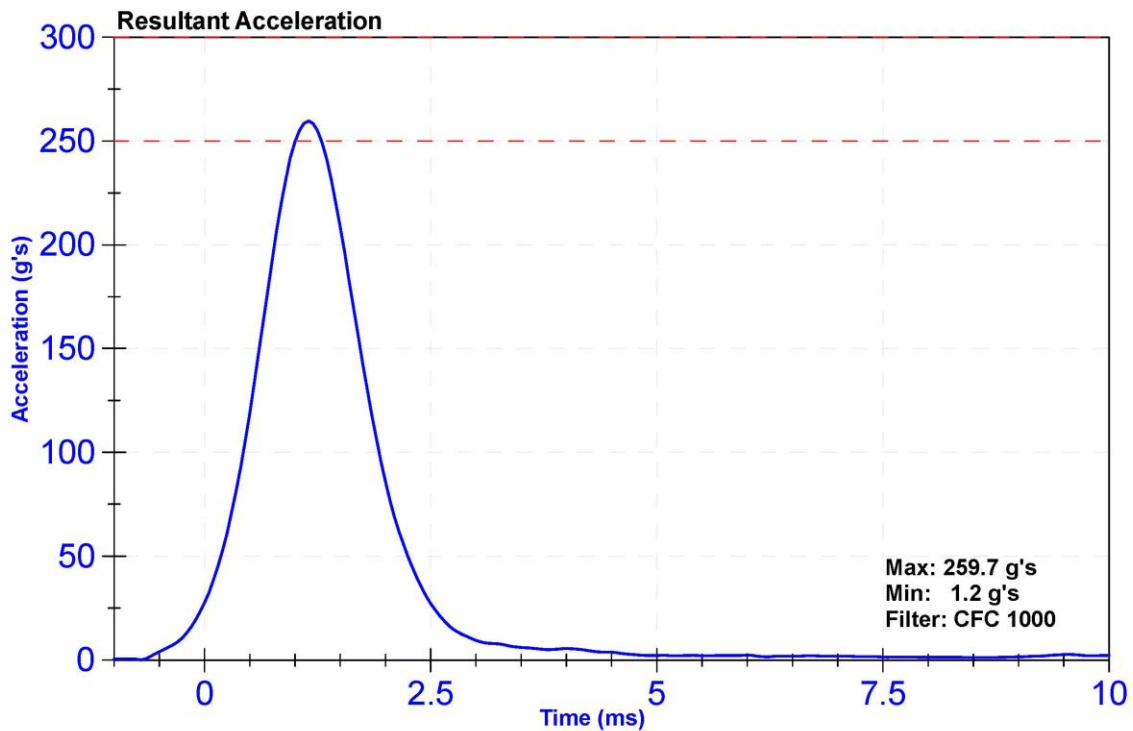

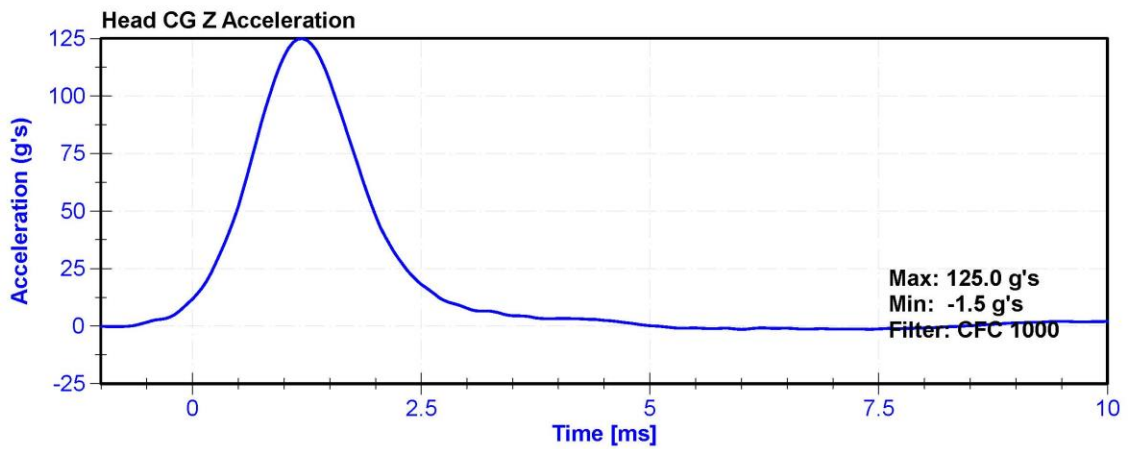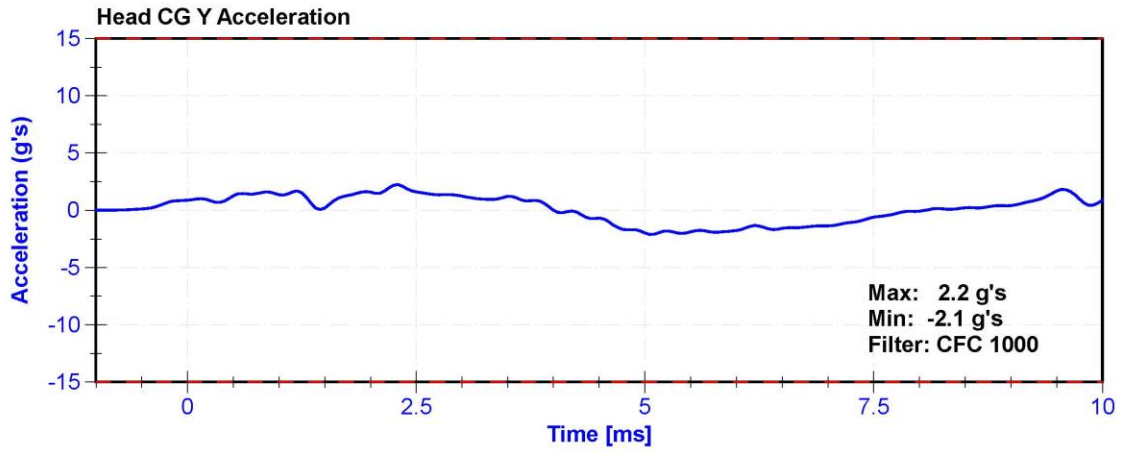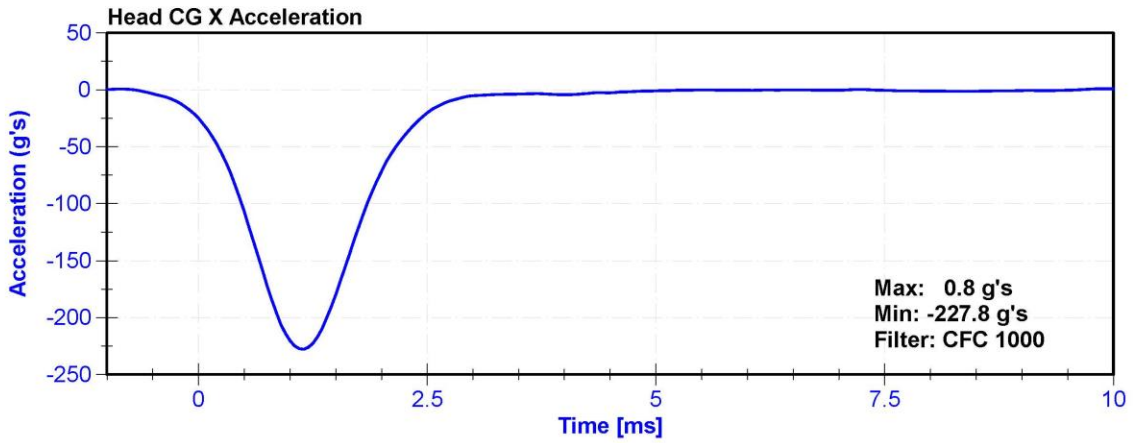


ATD Manufacturer	Denton	Test Technician	E. Helenbrook
ATD Serial Number	139	Laboratory Supervisor	K. Brogan



Results




Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21.5	Pass
Humidity	10	70	%	22.3	Pass
Velocity	6.89	7.13	m/s	7.127	Pass
Pendulum Impulse at 10ms	2.1	2.5	m/s	2.36	Pass
Pendulum Impulse at 20ms	4.0	5.0	m/s	4.74	Pass
Pendulum Impulse at 30ms	5.8	7.0	m/s	6.73	Pass
Max D Plane Rotation	77	91	deg	79.8	Pass
Max Moment During Rotation Interval	69	83	Nm	80.1	Pass
Moment Decay to 10.0 Nm	80	100	ms	86.1	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	ENDEVCO 7231CT	AC-C16503 Striker	2/6/2020	2/5/2021
Pendulum Potentiometer	ETI SP22G	DS-LABPOT1	9/17/2020	9/17/2021
Condyle Potentiometer	ETI SP22G	DS-LABPOT2	9/17/2020	9/17/2021
Upper Neck Load Cell	Denton 1716A	LC-2192Fx	7/17/2020	7/17/2021

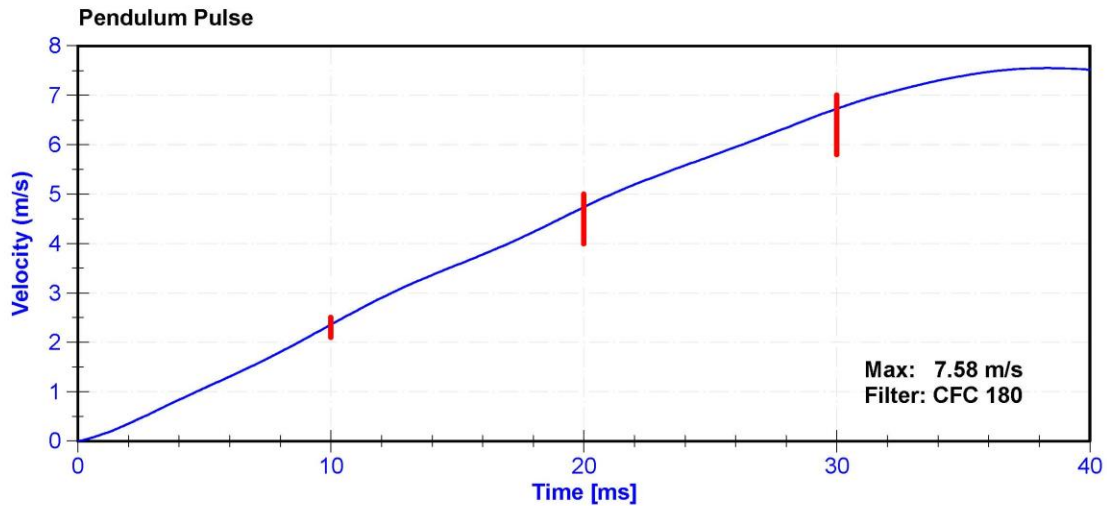

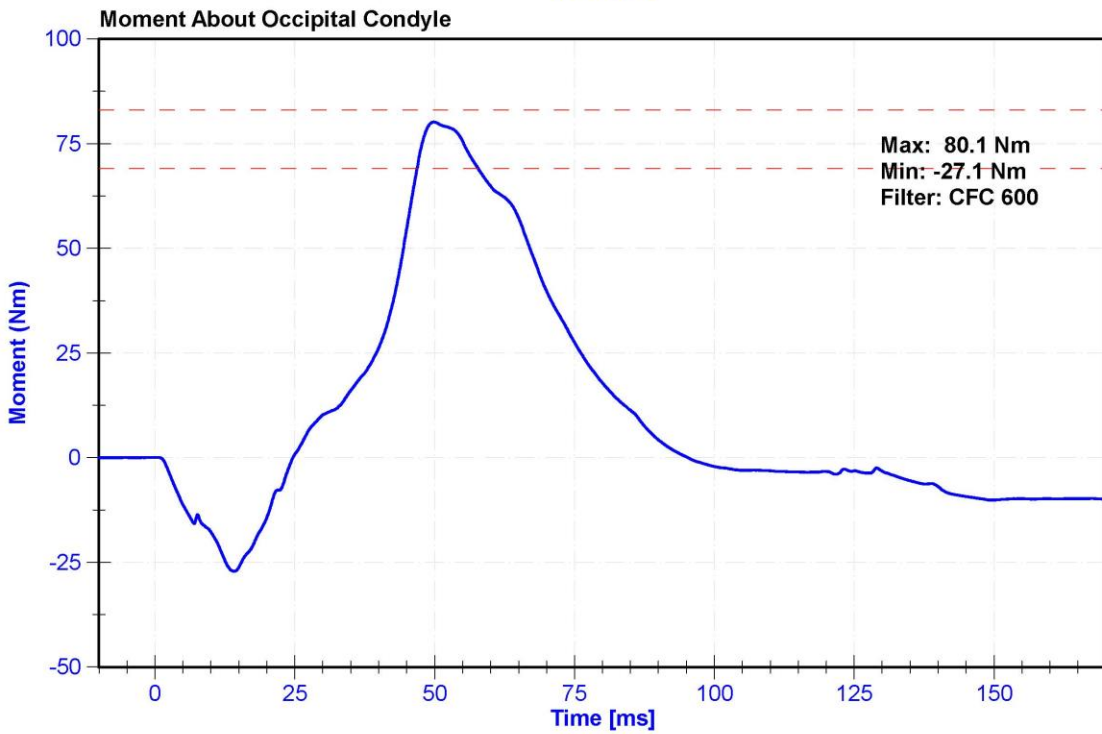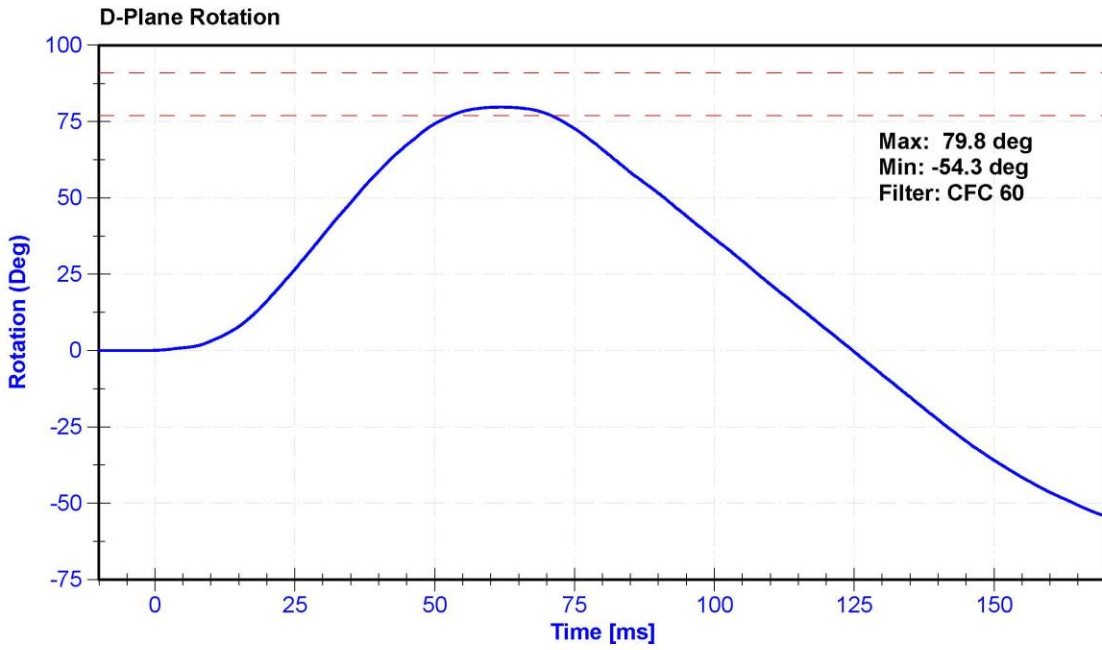

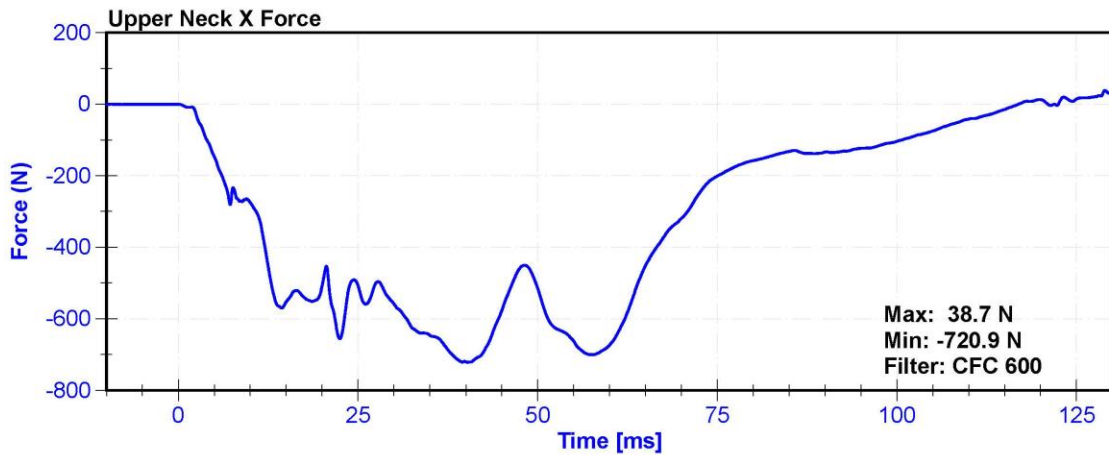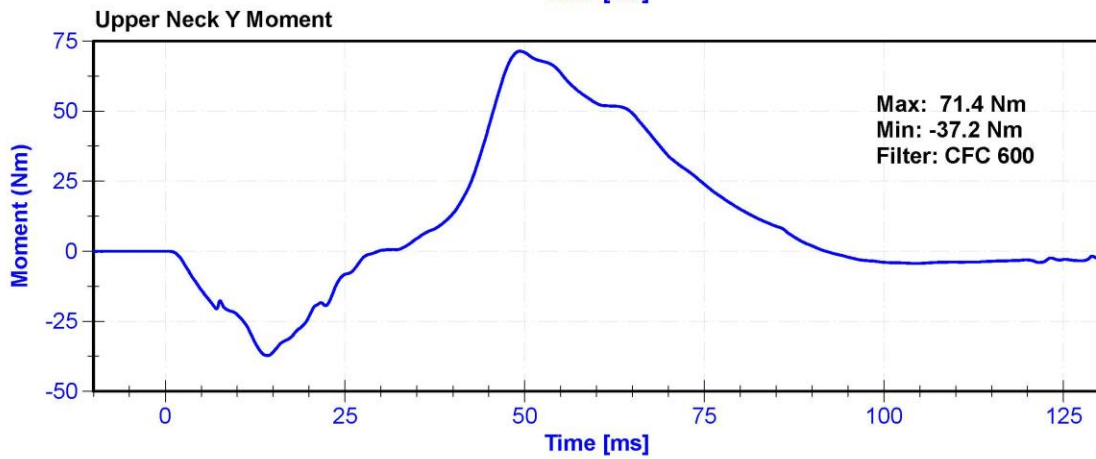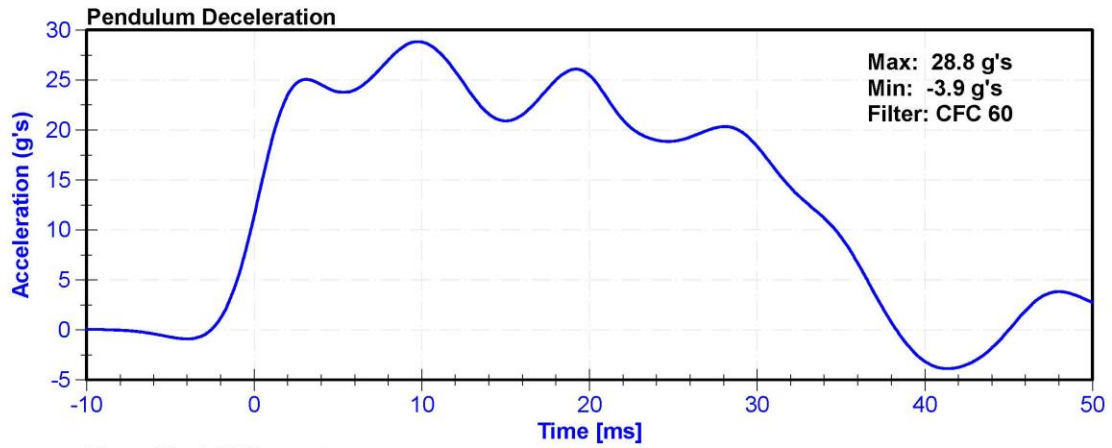


ATD Manufacturer	Denton	Test Technician	E. Helenbrook
ATD Serial Number	139	Laboratory Supervisor	K. Brogan



Results




Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21.5	Pass
Humidity	10	70	%	22.3	Pass
Velocity	5.95	6.19	m/s	6.046	Pass
Pendulum Impulse at 10ms	1.5	1.9	m/s	1.68	Pass
Pendulum Impulse at 20ms	3.1	3.9	m/s	3.50	Pass
Pendulum Impulse at 30ms	4.6	5.6	m/s	5.17	Pass
D Plane Rotation	99	114	deg	105.2	Pass
Moment During Rotation Interval	-65	-53	Nm	-63.6	Pass
Moment Decay to -10Nm	94	114	ms	100.0	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	ENDEVCO 7231CT	AC-C16503 Striker	2/6/2020	2/5/2021
Pendulum Potentiometer	ETI SP22G	DS-LABPOT1	9/17/2020	9/17/2021
Condyle Potentiometer	ETI SP22G	DS-LABPOT2	9/17/2020	9/17/2021
Upper Neck Load Cell	Denton 1716A	LC-2192Fx	7/17/2020	7/17/2021

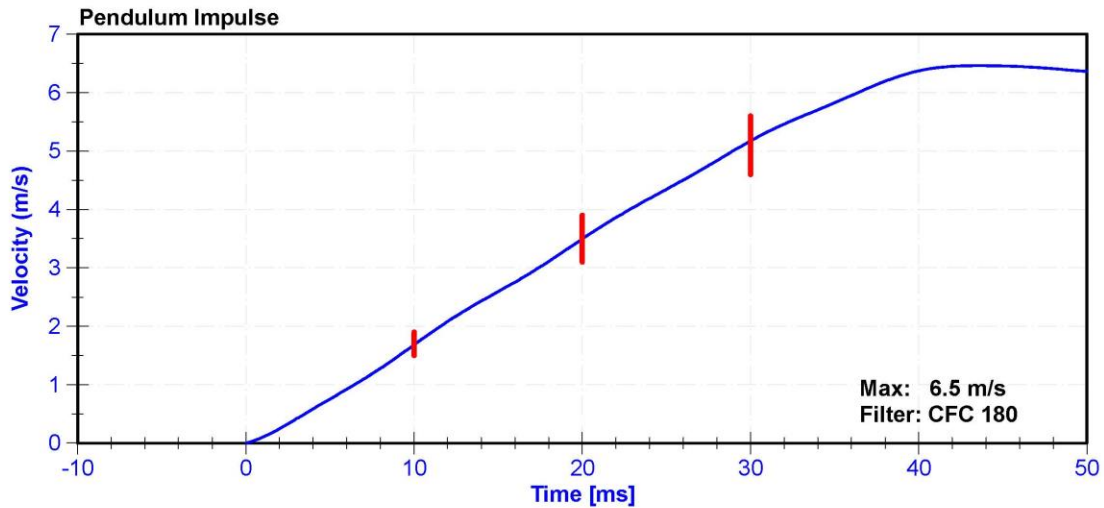

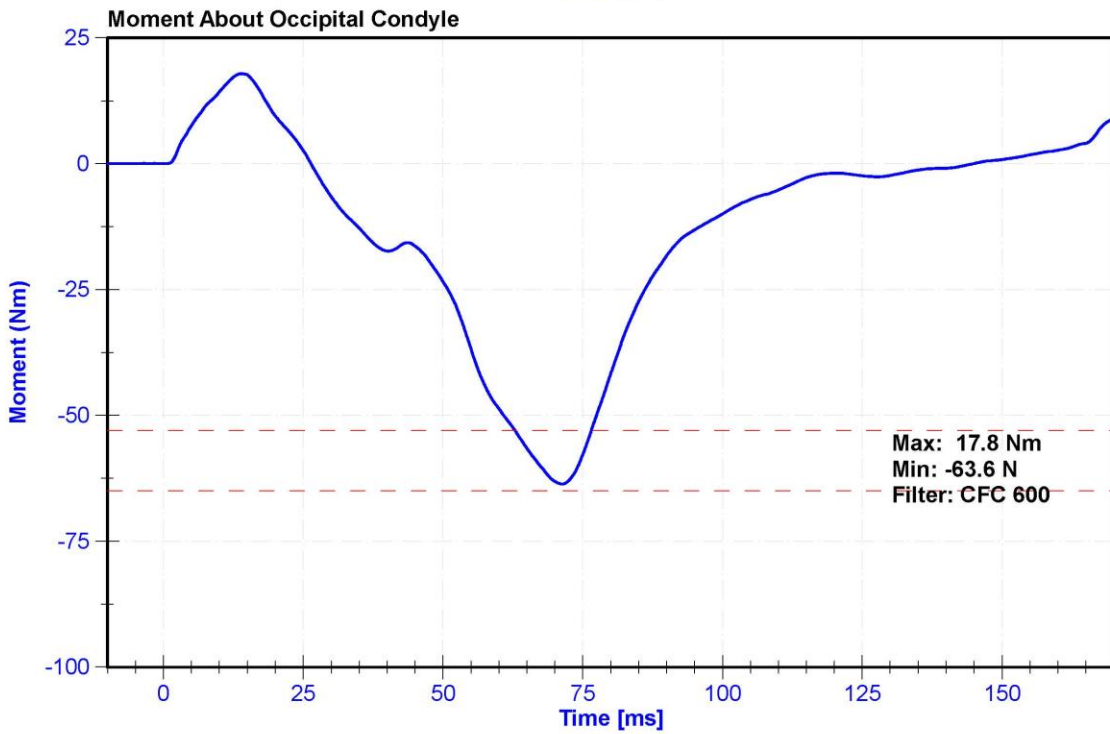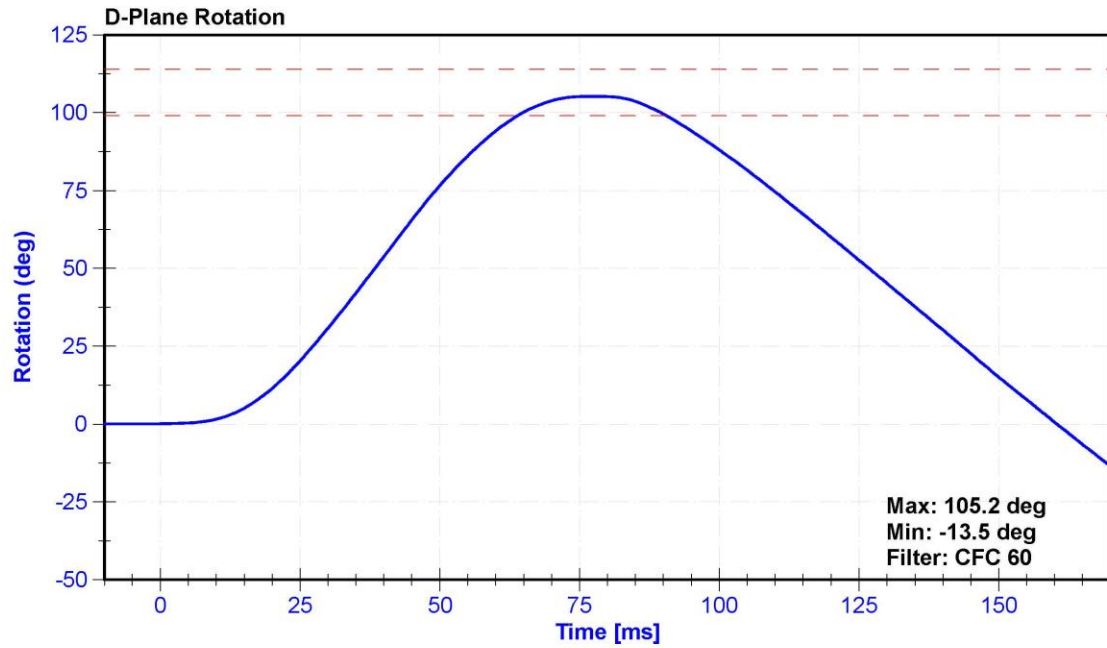

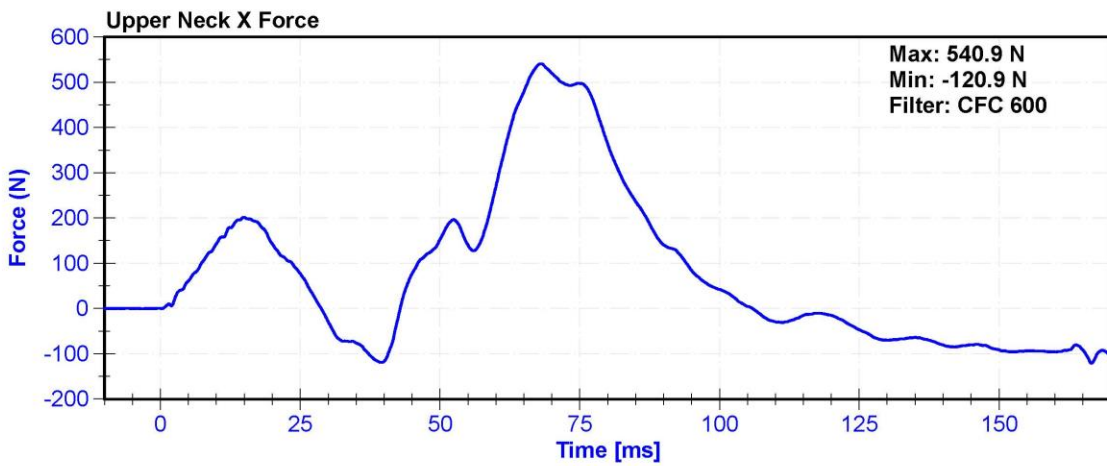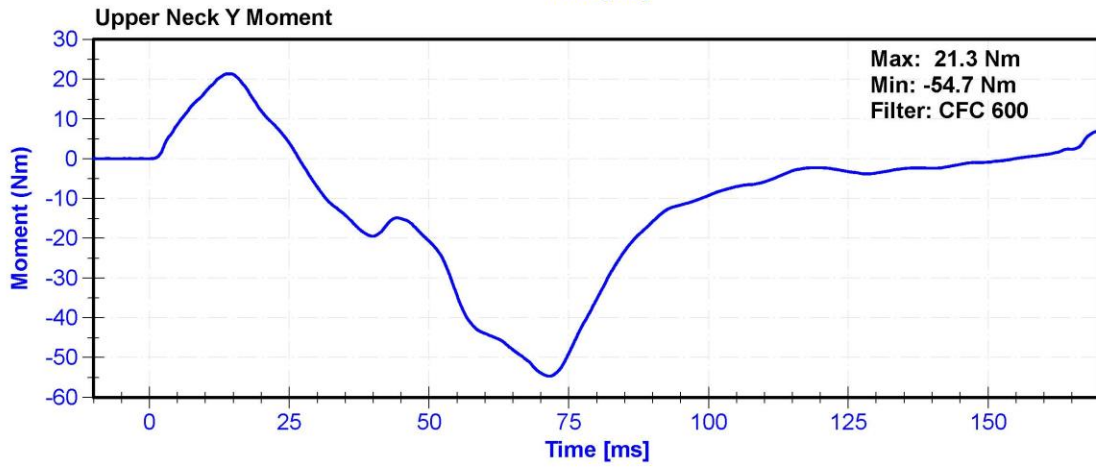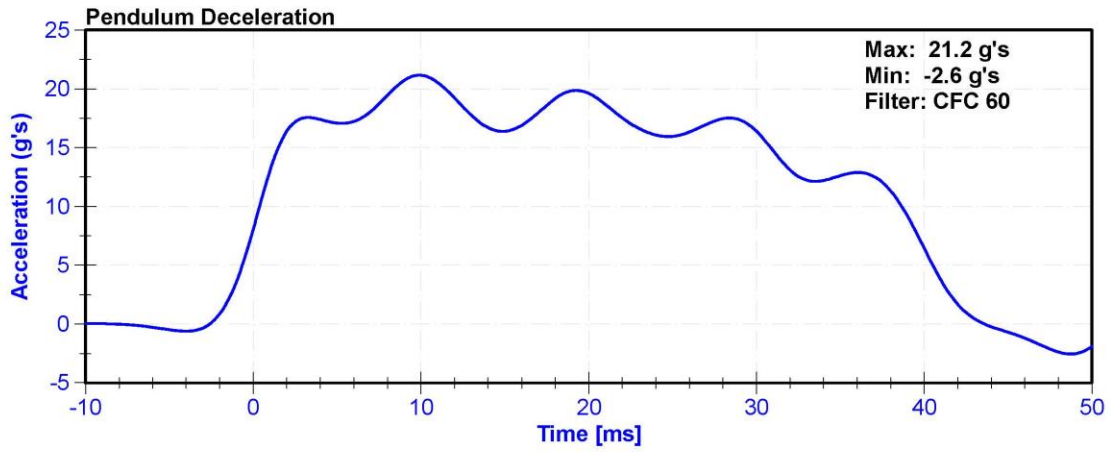


ATD Manufacturer	Denton	Test Technician	C. Mantell
ATD Serial Number	139	Laboratory Supervisor	K. Brogan



Results



Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21.4	Pass
Humidity	10	70	%	34.6	Pass
Velocity	6.59	6.83	m/s	6.743	Pass
Chest Deflection	-58	-50	mm	-55.4	Pass
Maximum Resistive Force (50 to 58mm)	3900	4400	N	4225.9	Pass
Maximum Resistive Force (18 to 50mm)	0	4600	N	4131.6	Pass
Hysteresis	69	85	%	69.4	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	MSI 64C-2000	A286228	1/29/2020	1/28/2021
Chest Potentiometer	SERVO H3CD	DS-503	8/3/2020	2/1/2021

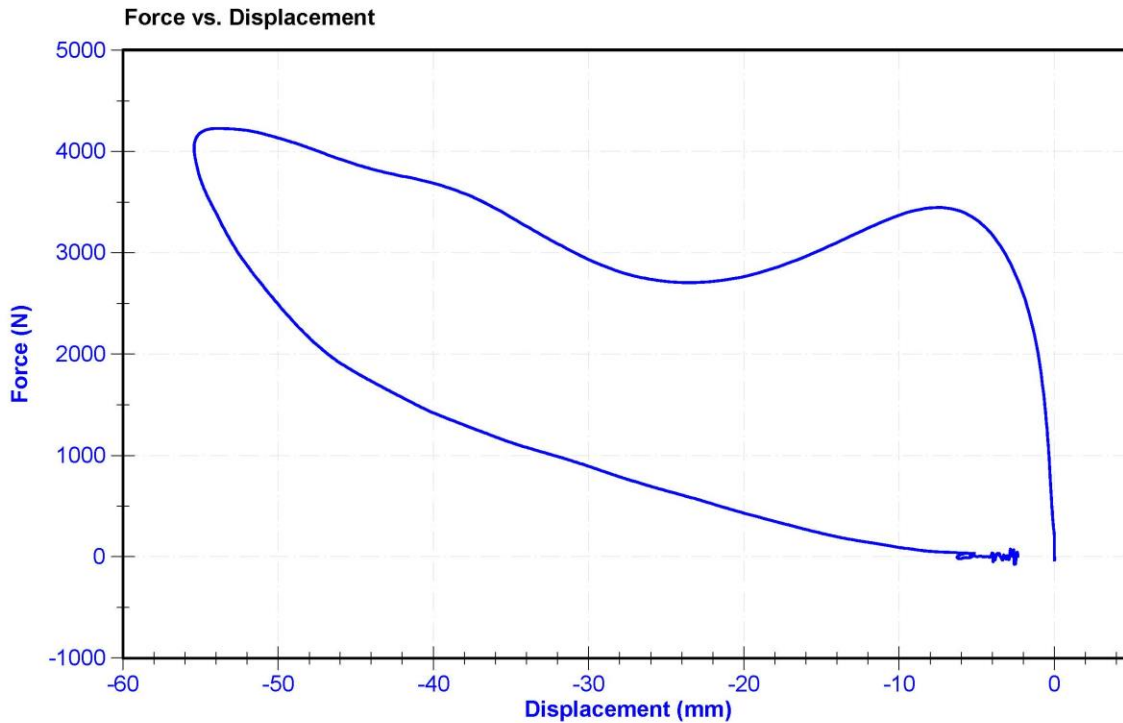

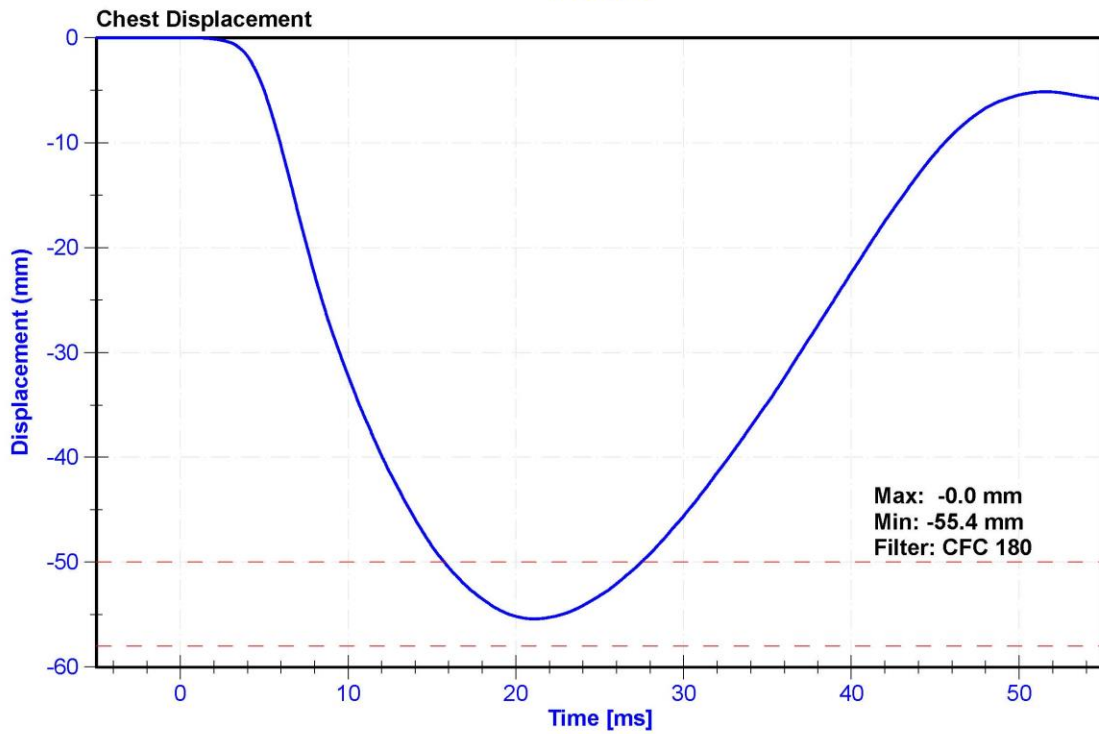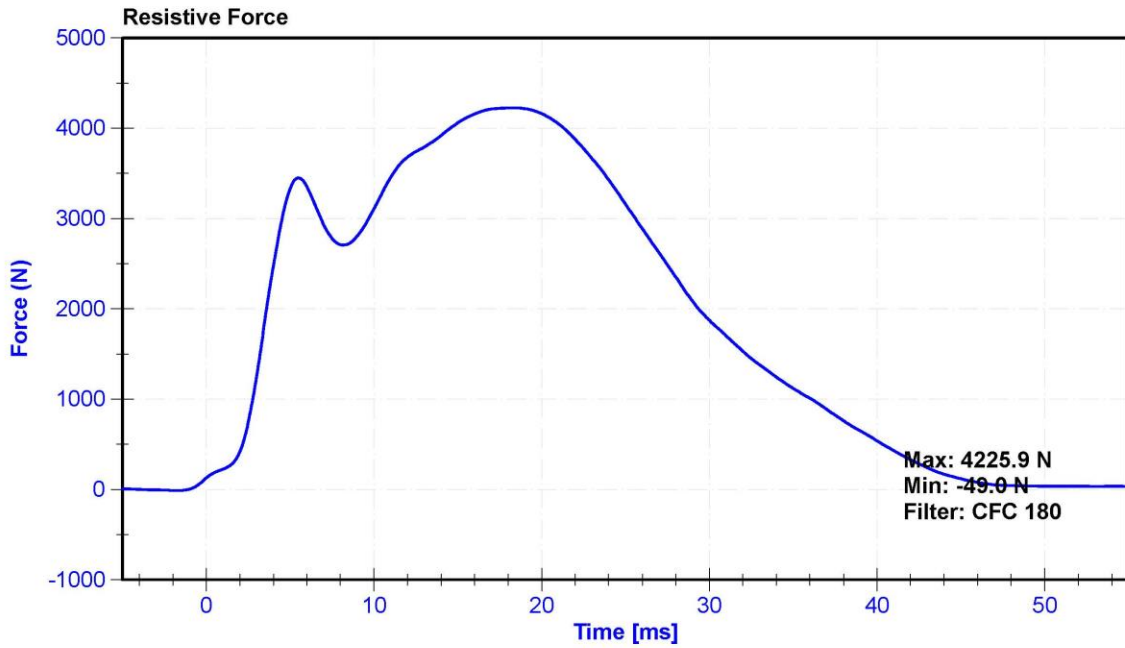

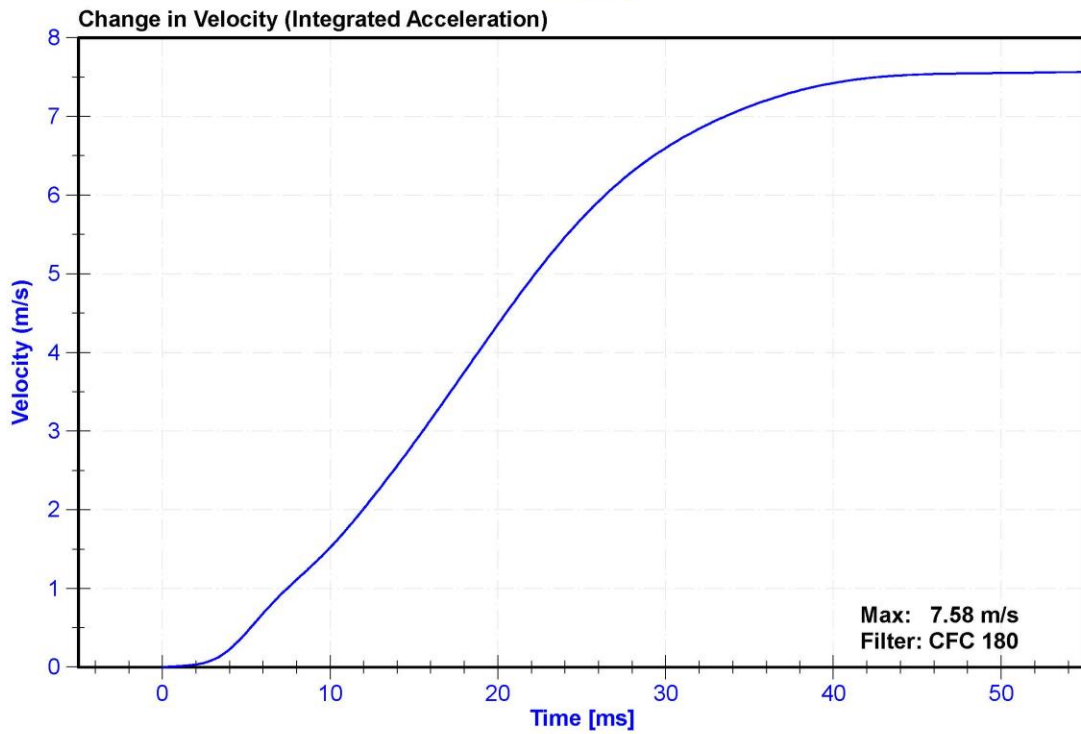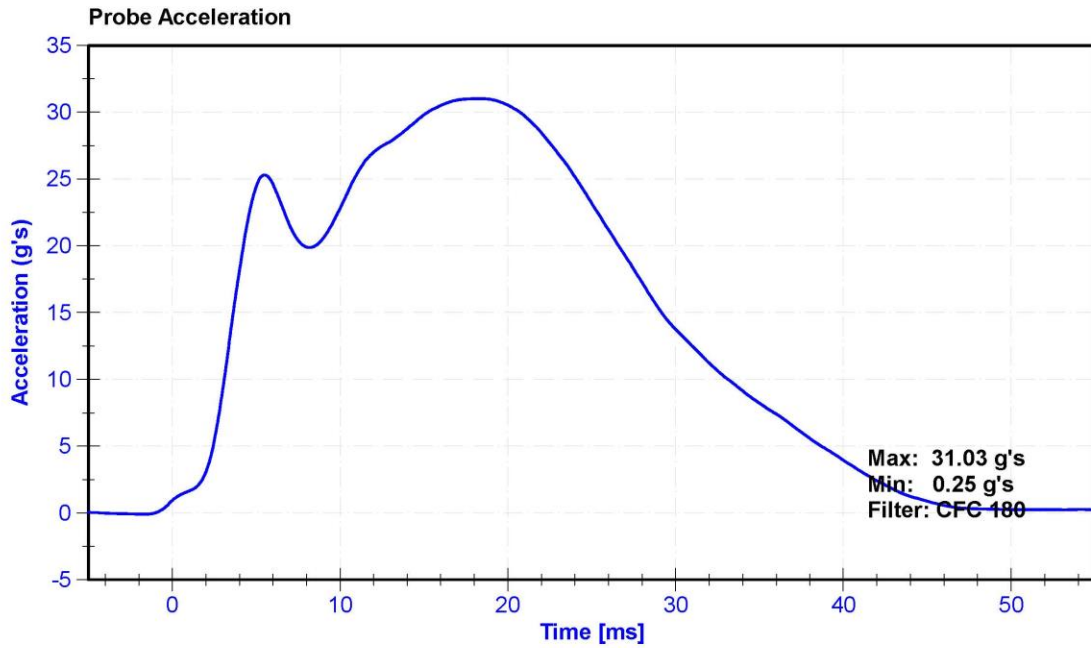

ATD Manufacturer	Denton	Test Technician	K. Dutton
ATD Serial Number	139	Laboratory Supervisor	K. Brogan


Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	18.6	25.6	°C	22	Pass
Humidity	10	70	%	28.6	Pass
Initial Angle	0	20	deg	17.2	Pass
Force at 45 Degrees	320	390	N	362.6	Pass
Return Angle Relative to Initial	0	8	deg	3.6	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Potentiometer	Seika.de N4C-1	DS-13051548	10/12/2020	10/12/2021
Load Cell	Interface SML-200	LC-493319	10/8/2020	10/8/2021

Force vs. Displacement

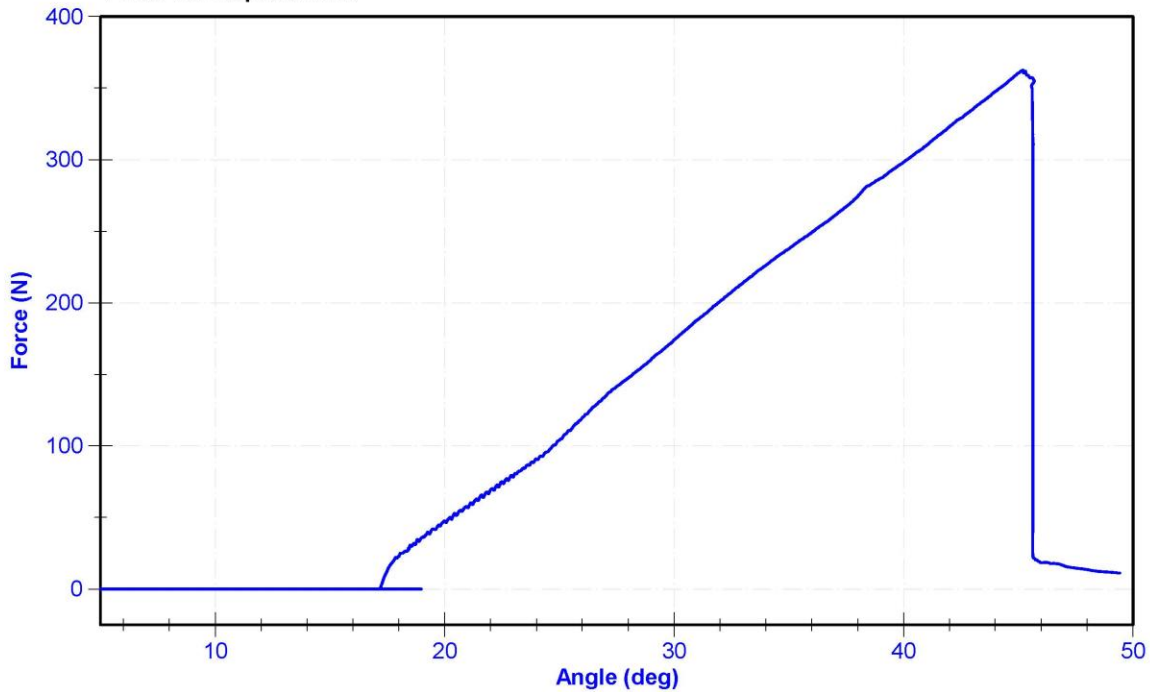


ATD Manufacturer	Denton	Test Technician	K. Dutton
ATD Serial Number	139	Laboratory Supervisor	K. Brogan



Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	18.9	25.6	°C	21.0	Pass
Humidity	10	70	%	26.7	Pass
Velocity	2.07	2.13	m/s	2.115	Pass
Resistive Force	3450	4060	N	3806.7	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	MSI 64C-2000	A279031	5/8/2020	5/8/2021

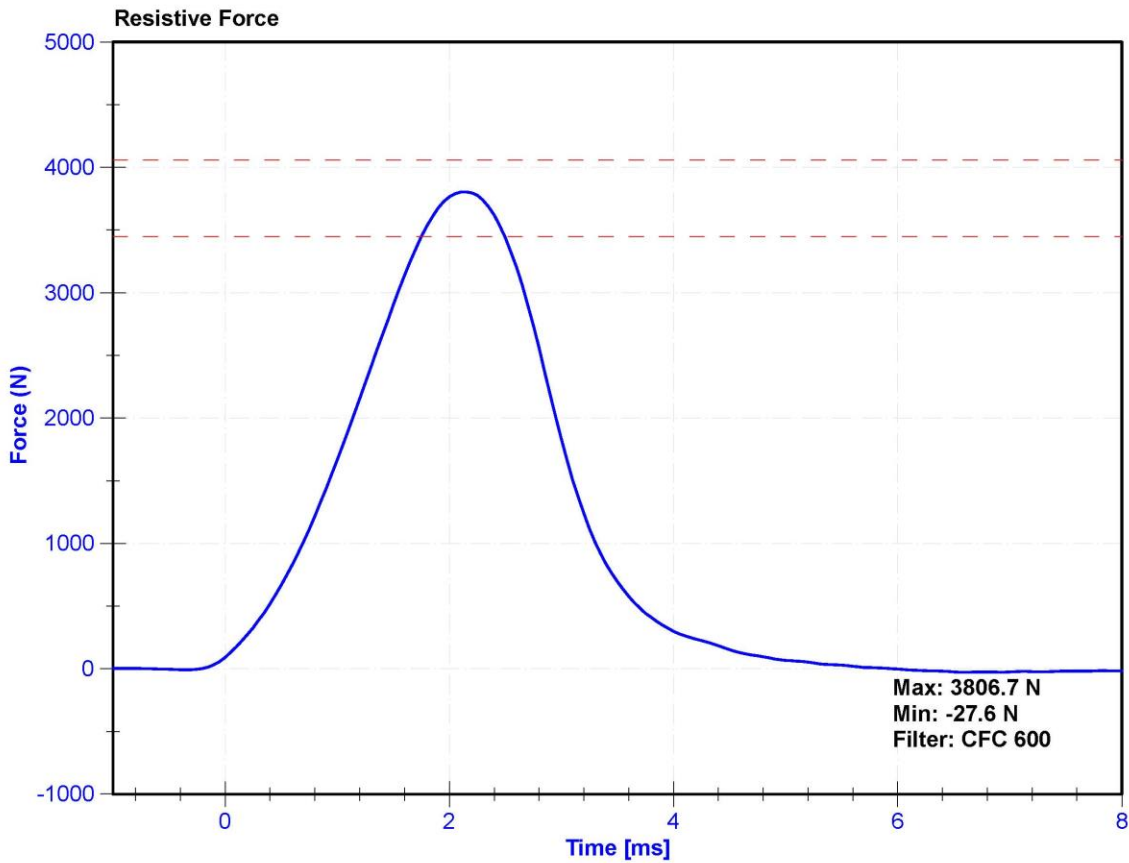

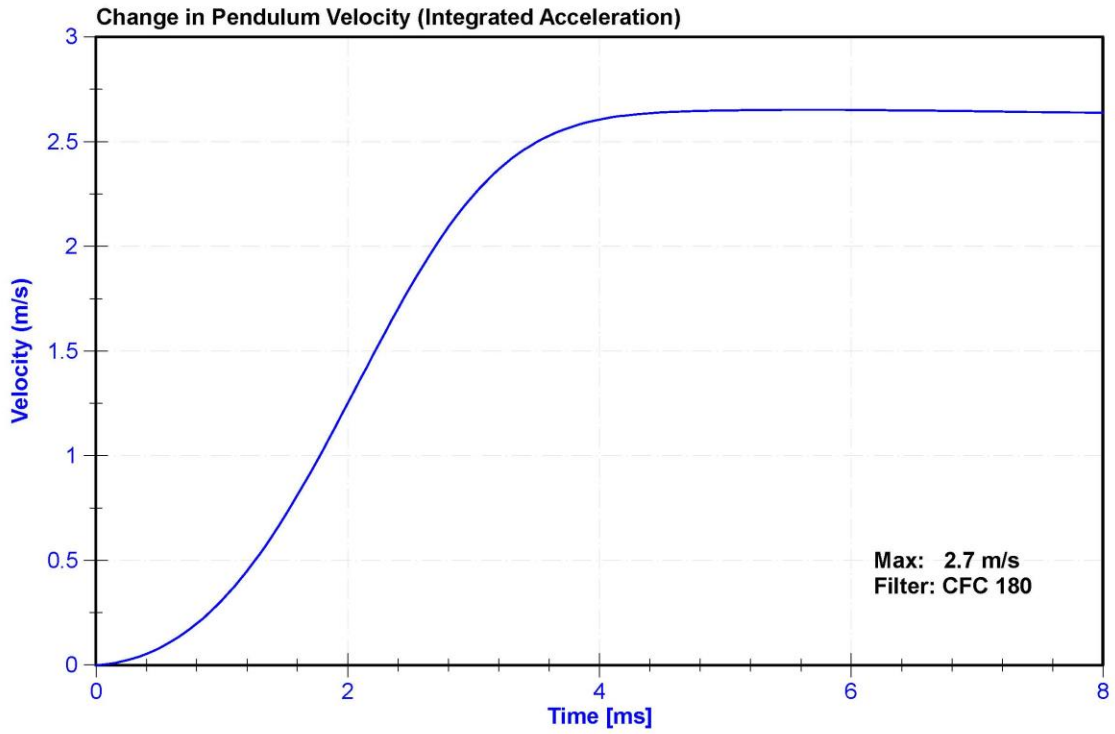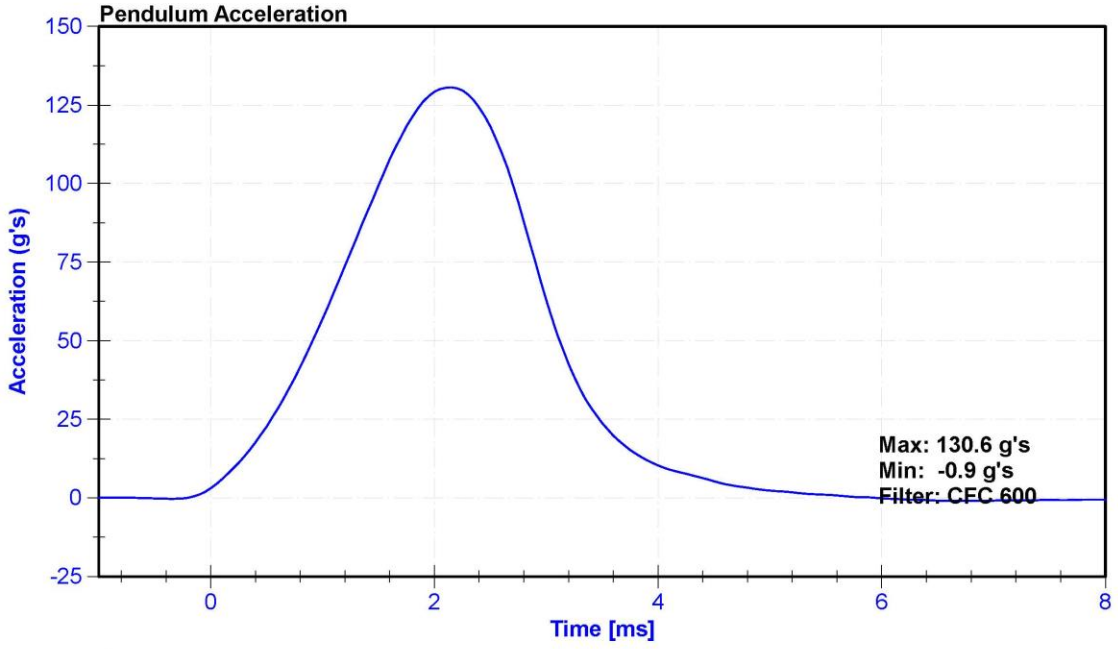


ATD Manufacturer	Denton	Test Technician	K. Dutton
ATD Serial Number	139	Laboratory Supervisor	K. Brogan



Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	18.9	25.6	°C	21.1	Pass
Humidity	10	70	%	27.1	Pass
Velocity	2.07	2.13	m/s	2.120	Pass
Resistive Force	3450	4060	N	3823.9	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	MSI 64C-2000	A279031	5/8/2020	5/8/2021

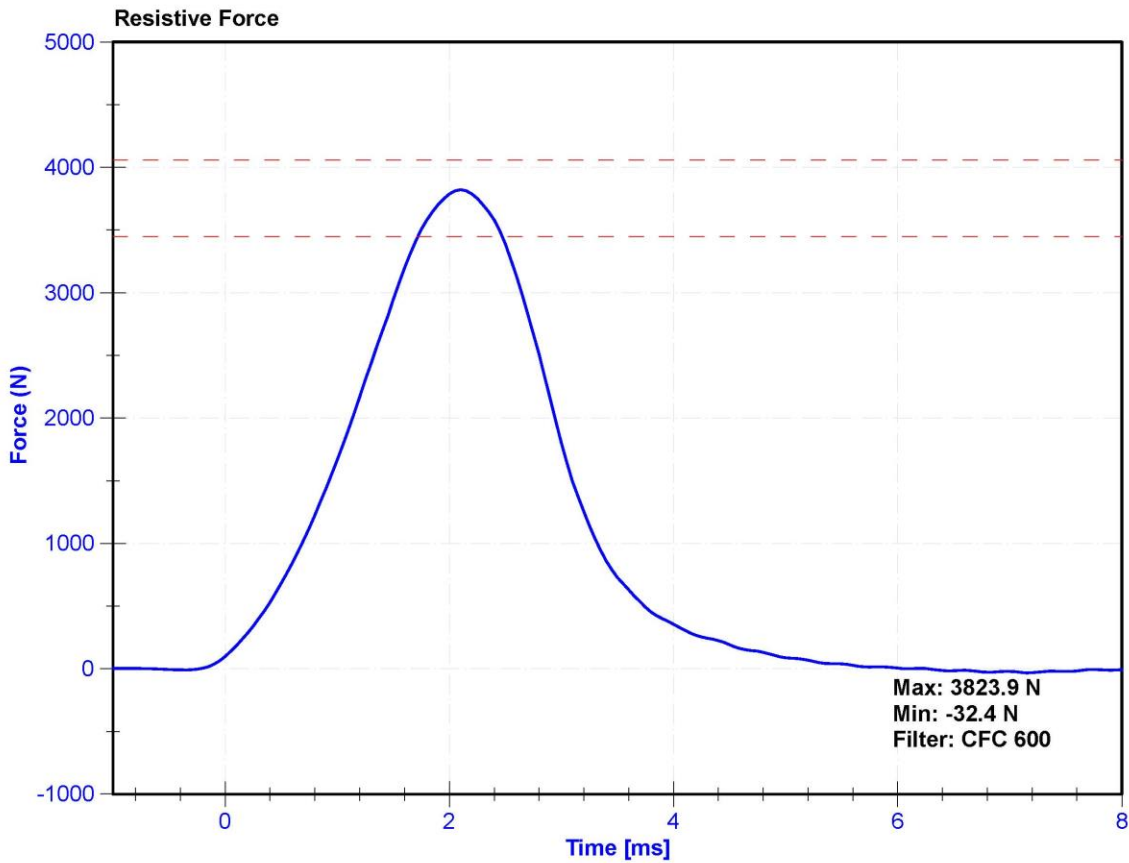

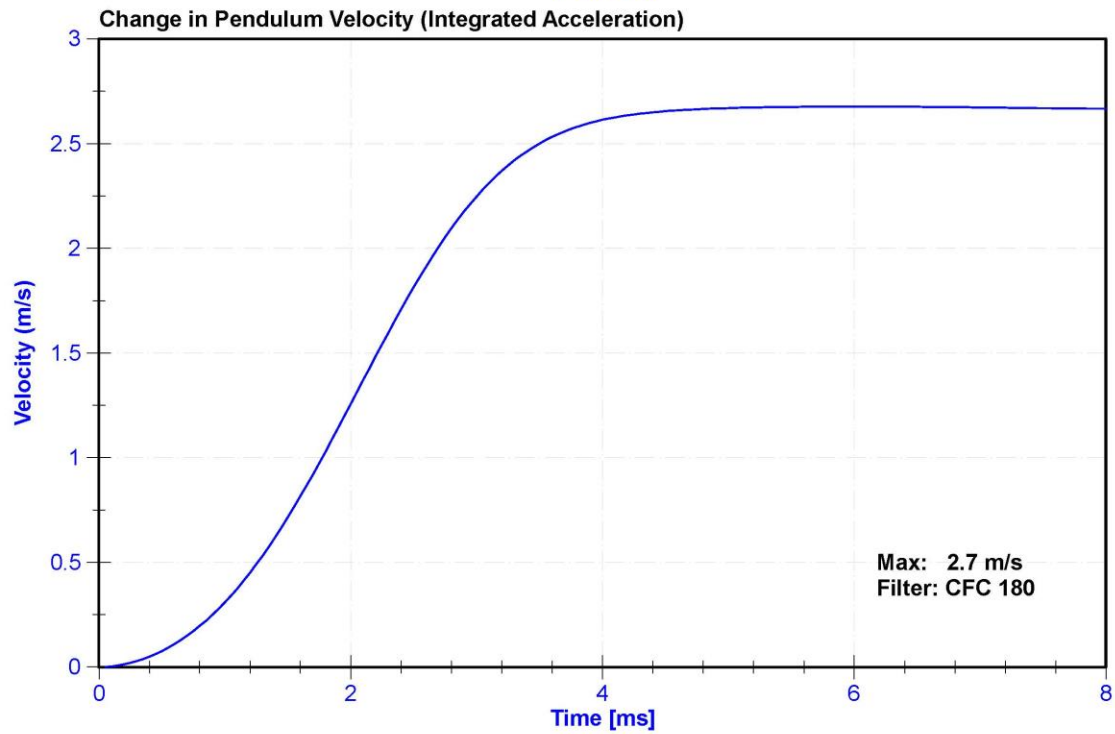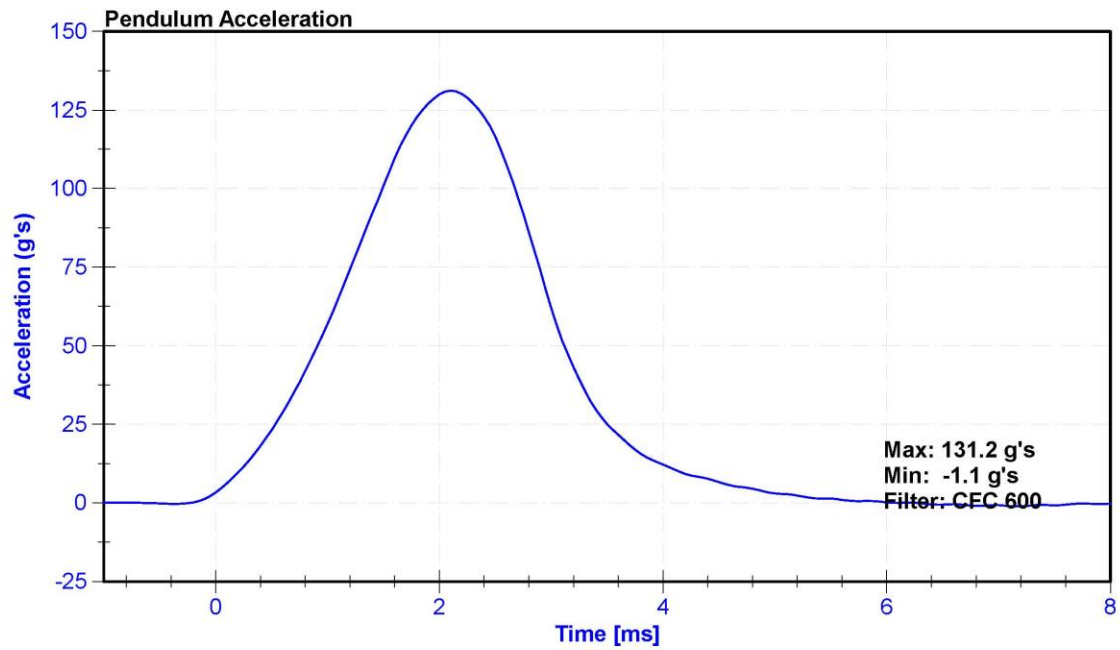

APPENDIX D

DUMMY CALIBRATION AND PERFORMANCE VERIFICATION DATA

Table 1 – Driver Dummy Instrumentation

Instrumentation		Axis/Location	Hybrid III 50 th S/N: 142		
			Serial Number	Manufacturer	Calibration Date
Head Accelerometers	Primary	X	P51681	ENDEVCO	11/3/2020
		Y	P64151	ENDEVCO	11/3/2020
		Z	P52114	ENDEVCO	11/3/2020
	Redundant	X	P58833	ENDEVCO	11/3/2020
		Y	P58905	ENDEVCO	11/3/2020
		Z	P63996	ENDEVCO	11/3/2020
Head Angular Rate Sensors		X	ARS15217GFE	DTS PRO-8K 2KHz	2/21/2020
		Y	ARS15697GFE	DTS ARS PRO-18K	2/21/2020
		Z	ARS15696GFE	DTS ARS PRO-18K	2/21/2020
Upper Neck Load Cell		FX, Fy, Fz MX,MY, MZ	LC-2186Fx	Denton	11/10/2020
Chest Accelerometers	Primary	X	AC-P51994	ENDEVCO	11/3/2020
		Y	AC-P51991	ENDEVCO	11/3/2020
		Z	AC-P49185	ENDEVCO	11/3/2020
	Redundant	X	AC-P51713	ENDEVCO	11/3/2020
		Y	AC-P68059	ENDEVCO	11/3/2020
		Z	AC-P78824	ENDEVCO	11/3/2020
Chest Potentiometer		X	DS-142	Servo	11/19/2020
Pelvis Accelerometer		X	AC-P58800	ENDEVCO	11/3/2020
		Y	AC-P52157	ENDEVCO	11/3/2020
		Z	AC-P52156	ENDEVCO	11/3/2020
Femur Load Cells - Left	Primary	Z	LC-136Fz1	Denton	11/10/2020
	Redundant	Z	LC-136Fz2	Denton	11/10/2020
Femur Load Cells - Right	Primary	Z	LC-DI4211FZ1	Denton	11/10/2020
	Redundant	Z	LC-DI4211FZ2	Denton	11/10/2020
Tibia Load Cells - Left	Upper	MX, MY, FZ	3643-93 Fz	Denton	11/20/2020
	Lower	MX, MY, FZ	36440495-FZ	Denton	11/20/2020
Tibia Load Cells – Right	Upper	MX, MY, FZ	36430362-FZ	Denton	11/20/2020
	Lower	MX, MY, FZ	LC-672 FZ	Denton	7/8/2020
Foot Accelerometers - Left	Rear	X	AC-P50084	ENDEVCO	11/3/2020
	Front	Z	AC-P58779	ENDEVCO	11/3/2020
Foot Accelerometers - Right	Rear	X	AC-P51872	ENDEVCO	11/3/2020
	Front	Z	AC-P58893	ENDEVCO	11/3/2020
Seat belt Load Cells	Lap		NA	NA	NA
	Shoulder		NA	NA	NA

Table 2 – Front Passenger Dummy Instrumentation

Instrumentation		Axis/Location	Hybrid III 5 th S/N: 139		
			Serial Number	Manufacturer	Calibration Date
Head Accelerometers	Primary	X	AC-P58780	ENDEVCO	11/4/2020
		Y	AC-P83320	ENDEVCO	11/4/2020
		Z	AC-P58997	ENDEVCO	11/4/2020
	Redundant	X	AC-P58998	ENDEVCO	11/4/2020
		Y	AC-P58749	ENDEVCO	11/4/2020
		Z	AC-P71292	ENDEVCO	11/4/2020
Head Angular Rate Sensors		X	ARS14921GFE	DTS ARS PRO-18K	8/4/2020
		Y	ARS15212GFE	DTS PRO-8K 2KHz	8/4/2020
		Z	ARS7370GFE	DTS ARS PRO-18K	8/4/2020
Upper Neck Load Cell		FX, Fy, Fz MX,MY, MZ	LC-2192Fx	Denton	7/17/2020
Chest Accelerometers	Primary	X	AC-P51965	ENDEVCO	11/4/2020
		Y	AC-P23904	ENDEVCO	11/4/2020
		Z	AC-P50062	ENDEVCO	11/4/2020
	Redundant	X	AC-P52007	ENDEVCO	11/4/2020
		Y	AC-P51259	ENDEVCO	11/4/2020
		Z	AC-P58981	ENDEVCO	11/4/2020
Chest Potentiometer		X	DS-503	SERVO H3CD	8/3/2020
Pelvis Accelerometer		X	AC-P58912	ENDEVCO	11/4/2020
		Y	AC-P51220	ENDEVCO	11/4/2020
		Z	AC-P82759	ENDEVCO	11/4/2020
Femur Load Cells - Left	Primary	Z	LC-115-1 Fz	Denton	11/23/2020
	Redundant	Z	LC-115-2 Fz	Denton	11/23/2020
Femur Load Cells - Right	Primary	Z	LC-135Fz1	Denton	11/23/2020
	Redundant	Z	LC-135Fz2	Denton	11/23/2020
Tibia Load Cells - Left	Upper	MX, MY, FZ	36430407-FX	Denton	7/9/2020
	Lower	MX, MY, FZ	36440674-FZ	Denton	11/20/2020
Tibia Load Cells – Right	Upper	MX, MY, FZ	36430486-FX	Denton	11/20/2020
	Lower	MX, MY, FZ	LC-490Fz	Denton	11/20/2020
Foot Accelerometers - Left	Rear	X	AC-P82750	ENDEVCO	11/3/2020
	Front	Z	AC-P64006	ENDEVCO	11/3/2020
Foot Accelerometers - Right	Rear	X	AC-P78669	ENDEVCO	11/3/2020
	Front	Z	AC-P52054	ENDEVCO	11/3/2020
Seat belt Load Cells	Lap		NA	NA	NA
	Shoulder		NA	NA	NA

Table 3 – Vehicle Instrumentation

Instrumentation			Axis	Serial Number	Manufacturer	Calibration Date
Crossmember/Rear Seat Accelerometers	Left	Primary	X	A352331	MSI 1201-1000	9/25/2020
			Z	A352400	MSI 1201-1000	9/25/2020
	Right	Redundant	X	A352339	MSI 1201-1000	9/25/2020
			Z	A315755	MSI 1201-1000	7/24/2020
		Primary	X	A315755	MSI 1201-1000	7/24/2020
			Z	A316000	MSI 1201-1000	7/24/2020
Redundant	X	A315923	MSI 1201-1000	7/24/2020		
Engine Accelerometers	Top		X	A280016	MSI 1201-1000	10/19/2020
	Bottom		X	A280969	MSI 1201-1000	7/23/2020