

**NEW CAR ASSESSMENT PROGRAM  
CRASH IMMINENT BRAKING SYSTEM CONFIRMATION TEST  
NCAP-DRI-CIB-21-01**

**2021 Buick Envision Preferred AWD**

**DYNAMIC RESEARCH, INC.**

355 Van Ness Avenue, STE 200  
Torrance, California 90501



**24 May 2021**

**Final Report**

**Prepared Under Contract No. DTNH22-14-D-00333**

**U.S. DEPARTMENT OF TRANSPORTATION  
National Highway Traffic Safety Administration  
New Car Assessment Program  
1200 New Jersey Avenue, SE  
West Building, 4<sup>th</sup> Floor (NRM-110)  
Washington, DC 20590**

Prepared for the Department of Transportation, National Highway Traffic Safety Administration, under Contract No. DTNH22-14-D-00333.

This publication is distributed by the U.S. Department of Transportation, National Highway Traffic Safety Administration, in the interest of information exchange. The opinions, findings, and conclusions expressed in this publication are those of the author(s) and not necessarily those of the Department of Transportation or the National Highway Traffic Safety Administration. The United States Government assumes no liability for its contents or use thereof. If trade or manufacturer's names or products are mentioned, it is only because they are considered essential to the object of the publication and should not be construed as an endorsement. The United States Government does not endorse products of manufacturers.

Prepared By: J. Lenkeit

Program Manager

Date: 24 May 2021

K. Nagao

Test Engineer

1. Report No. NCAP-DRI-CIB-21-01	2. Government Accession No.	3. Recipient's Catalog No.	
4. Title and Subtitle Final Report of Crash Imminent Braking System Confirmation Test of a 2021 Buick Envision Preferred AWD.		5. Report Date 24 May 2021	6. Performing Organization Code DRI
		8. Performing Organization Report No. DRI-TM-20-187	
7. Author(s) J. Lenkeit, Program Manager K. Nagao, Test Engineer		10. Work Unit No.	
9. Performing Organization Name and Address Dynamic Research, Inc. 355 Van Ness Ave, STE 200 Torrance, CA 90501		11. Contract or Grant No. DTNH22-14-D-00333	
		13. Type of Report and Period Covered Final Test Report May 2021	
12. Sponsoring Agency Name and Address U.S. Department of Transportation National Highway Traffic Safety Administration New Car Assessment Program 1200 New Jersey Avenue, SE, West Building, 4th Floor (NRM-110) Washington, DC 20590		14. Sponsoring Agency Code NRM-110	
		15. Supplementary Notes	
16. Abstract These tests were conducted on the subject 2021 Buick Envision Preferred AWD in accordance with the specifications of the New Car Assessment program's most current Test Procedure in docket NHTSA-2015-0006-0025; CRASH IMMINENT BRAKE SYSTEM PERFORMANCE EVALUATION FOR THE NEW CAR ASSESSMENT PROGRAM, October 2015. The vehicle passed the requirements of the test for all four CIB test scenarios and all speeds.			
17. Key Words Crash Imminent Braking, CIB, AEB, New Car Assessment Program, NCAP		18. Distribution Statement Copies of this report are available from the following: NHTSA Technical Reference Division National Highway Traffic Safety Administration 1200 New Jersey Avenue, SE Washington, DC 20590	
19. Security Classif. (of this report) Unclassified	20. Security Classif. (of this page) Unclassified	21. No. of Pages 118	22. Price

## TABLE OF CONTENTS

<u>SECTION</u>	<u>PAGE</u>
I. INTRODUCTION .....	1
II. DATA SHEETS.....	2
Data Sheet 1: Test Results Summary.....	3
Data Sheet 2: Vehicle Data .....	4
Data Sheet 3: Test Conditions.....	5
Data Sheet 4: Crash Imminent Braking System Operation.....	7
III. TEST PROCEDURES .....	10
A. Test Procedure Overview .....	10
B. General Information.....	15
C. Principal Other Vehicle .....	18
D. Automatic Braking System.....	19
E. Instrumentation.....	20
APPENDIX A Photographs .....	A-1
APPENDIX B Excerpts from Owner's Manual.....	B-1
APPENDIX C Run Log .....	C-1
APPENDIX D Time Histories.....	D-1

## Section I

### INTRODUCTION

Crash Imminent Braking (CIB) systems are a subset of Automatic Emergency Braking (AEB) systems. CIB systems are designed to avoid, or mitigate rear-end crashes, by automatically applying subject vehicle brakes when the system determines that, without intervention, a rear-end crash will occur. CIB systems typically work as an extension of Forward Collision Warning (FCW) systems, which alert the driver to the possibility of a collision unless driver action is taken. CIB systems employ sensors capable of detecting vehicles in the forward path. Current CIB technology typically involves RADAR, LIDAR, or vision-based (camera) sensors, and measurement of vehicle operating conditions such as speed, driver steering and brake application, etc. Algorithms in the system's Central Processing Unit (CPU) use this information to continuously monitor the likelihood of a rear-end crash and command a brake actuator to apply the brakes when necessary.

The method prescribed by the National Highway Traffic Safety Administration (NHTSA) to evaluate CIB performance on the test track<sup>1</sup> involves three rear-end type crash configurations and a "false positive" test. In the rear-end scenarios, a subject vehicle (SV) approaches a stopped, slower-moving, or decelerating principal other vehicle (POV) in the same lane of travel. For these tests, the POV is a strikeable object with the characteristics of a compact passenger car. The false positive scenarios are used to evaluate the propensity of a CIB system to inappropriately activate in a non-critical driving scenario that does not involve a forward vehicle or present a safety risk to the SV occupant(s).

The purpose of the testing reported herein was to objectively quantify the performance of a Crash Imminent Braking system installed on a 2021 Buick Envision Preferred AWD. This test is part of the New Car Assessment Program to assess Crash Imminent Braking Systems sponsored by the National Highway Traffic Safety Administration under Contract No. DTNH22-14-D-00333.

---

<sup>1</sup> NHTSA-2015-0006-0025; Crash Imminent Brake System Performance Evaluation for the New Car Assessment Program, October 2015.

Section II  
**DATA SHEETS**

**CRASH IMMINENT BRAKING**  
**DATA SHEET 1: TEST RESULTS SUMMARY**

(Page 1 of 1)

**2021 Buick Envision Preferred AWD**

---

VIN: LRBFZMR45MD09xxxx

Test Date: 5/11/2021

Crash Imminent Braking System settings:

Alert and Brake

Far (note that this setting only affects FCW timing and not AEB)

**Test 1 – Subject Vehicle Encounters  
Stopped Principal Other Vehicle**

SV 25 mph: Pass

**Test 2 – Subject Vehicle Encounters  
Slower Principal Other Vehicle**

SV 25 mph POV 10 mph: Pass

SV 45 mph POV 20 mph: Pass

**Test 3 – Subject Vehicle Encounters  
Decelerating Principal Other Vehicle**

SV 35 mph POV 35 mph: Pass

**Test 4 – Subject Vehicle Encounters  
Steel Trench Plate**

SV 25 mph: Pass

SV 45 mph: Pass

**Overall: Pass**

Notes:

**CRASH IMMINENT BRAKING**  
**DATA SHEET 2: VEHICLE DATA**

(Page 1 of 1)

**2021 Buick Envision Preferred AWD**

---

**TEST VEHICLE INFORMATION**

VIN: LRBFZMR45MD09xxxx

Body Style: SUV

Color: Ebony Twilight Metallic

Date Received: 3/15/2021

Odometer Reading: 67 mi

**DATA FROM VEHICLE'S CERTIFICATON LABEL**

Vehicle manufactured by: SAIC General Motors Corporation

Date of manufacture: 01/21

Vehicle Type: MPV

**DATA FROM TIRE PLACARD**

Tires size as stated on Tire Placard: Front: 245/45R20

Rear: 245/45R20

Recommended cold tire pressure: Front: 240 kPa (35 psi)

Rear: 240 kPa (35 psi)

**TIRES**

Tire manufacturer and model: Continental ProContact TX

Front tire designation: 245/45R20 99H

Rear tire designation: 245/45R20 99H

Front tire DOT prefix: 1LF0FBBXY

Rear tire DOT prefix: 1LF0FBBXY



**CRASH IMMINENT BRAKING**  
**DATA SHEET 3: TEST CONDITIONS**

(Page 1 of 2)

**2021 Buick Envision Preferred AWD**

---

**GENERAL INFORMATION**

Test date: 5/11/2021

**AMBIENT CONDITIONS**

Air temperature: 28.9 C (84 F)

Wind speed: 3.1 m/s (6.9 mph)

X Windspeed  $\leq$  10 m/s (22 mph)

X Tests were not performed during periods of inclement weather. This includes, but is not limited to, rain, snow, hail, fog, smoke, or ash.

X Tests were conducted during daylight hours with good atmospheric visibility (defined as an absence of fog and the ability to see clearly for more than 5000 meters). The tests were not conducted with the vehicle oriented into the sun during very low sun angle conditions, where the sun is oriented 15 degrees or less from horizontal, and camera "washout" or system inoperability results.

**VEHICLE PREPARATION**

**Verify the following:**

All non-consumable fluids at 100% capacity: X

Fuel tank is full: X

Tire pressures are set to manufacturer's recommended cold tire pressure: X

Front: 240 kPa (35 psi)

Rear: 240 kPa (35 psi)

**CRASH IMMINENT BRAKING**  
**DATA SHEET 3: TEST CONDITIONS**  
(Page 2 of 2)  
**2021 Buick Envision Preferred AWD**

---

**WEIGHT**

Weight of vehicle as tested including driver and instrumentation

Left Front: 580.6 kg (1280 lb)

Right Front: 536.1 kg (1182 lb)

Left Rear: 407.3 kg (898 lb)

Right Rear: 385.6 kg (850 lb)

Total: 1909.6 kg (4210 lb)

**CRASH IMMINENT BRAKING**  
**DATA SHEET 4: CRASH IMMINENT BRAKING SYSTEM OPERATION**

(Page 1 of 3)

**2021 Buick Envision Preferred AWD**

---

Name of the CIB option, option package, etc.:

*Automatic Emergency Braking (AEB): standard on all trims.*

Type and location of sensors the system uses:

*Mono Camera: Located top of center windshield*

System setting used for test (if applicable):

*Far (note that this setting only affects FCW timing and not AEB)*

What is the minimum vehicle speed at which the CIB system becomes active?

*8 km/h (5 mph) (Per manufacturer supplied information)*

What is the maximum vehicle speed at which the CIB system functions?

*80 km/h (50 mph) (Per manufacturer supplied information)*

Does the vehicle system require an initialization sequence/procedure?

Yes  
 No

If yes, please provide a full description.

Will the system deactivate due to repeated CIB activations, impacts, or near-misses?

Yes  
 No

If yes, please provide a full description.

**CRASH IMMINENT BRAKING**

**DATA SHEET 4: CRASH IMMINENT BRAKING SYSTEM OPERATION**

(Page 2 of 3)

**2021 Buick Envision Preferred AWD**

---

How is the Forward Collision Warning system alert presented to the driver?  Warning light  
(Check all that apply)  Buzzer or auditory alarm  
 Vibration  
Other \_\_\_\_\_

---

Describe the method by which the driver is alerted. For example, if the warning is a light, where is it located, its color, size, words, or symbol, does it flash on and off, etc. If it is a sound, describe if it is a constant beep or a repeated beep. If it is a vibration, describe where it is felt (e.g., pedals, steering wheel), the dominant frequency (and possibly magnitude), the type of warning (light, auditory, vibration, or combination), etc.

The visual alert is a red flashing LED in the heads-up display of the vehicle. See Appendix A, Figure A16. A secondary alert type can be selected as either an auditory alert, presented as a series of high-pitched beeps, or a haptic alert, presented as a seat vibration (Safety Alert Seat). Appendix A, Figures A14 and A15 show the selection menu.

Is there a way to deactivate the system?  Yes  
 No

If yes, please provide a full description including the switch location and method of operation, any associated instrument panel indicator, etc.

AEB can be activated/deactivated using vehicle personalization option as described on pages 109-110 of the Owner's Manual (Appendix B, pages B-6 and B-7). The touch screen is used to access the settings menus. The hierarchy is:

Settings

Vehicle

Collision/Detection Systems

Forward Collision System

Select: Off, Alert, or Alert and Brake.

See Appendix A, Figures A14 and A15.

If AEB is deactivated, the system remains deactivated in each subsequent ignition cycle. This is performed through the main touch menu and can switch between off, FCW only and FCW and AEB.

**CRASH IMMINENT BRAKING**

**DATA SHEET 4: CRASH IMMINENT BRAKING SYSTEM OPERATION**

(Page 3 of 3)

**2021 Buick Envision Preferred AWD**

---

Is the vehicle equipped with a control whose purpose is to adjust the range setting or otherwise influence the operation of CIB?  Yes  
 No

If yes, please provide a full description.

Are there other driving modes or conditions that render CIB inoperable or reduce its effectiveness?  Yes  
 No

If yes, please provide a full description.

AEB may not:

- Detect a vehicle ahead on windy or hilly roads
- Detect all vehicles, especially vehicles with a trailer, tractors, muddy vehicles, etc.
- Detect a vehicle when weather limits visibility, such as in fog, rain or snow;
- Detect a vehicle ahead if it is partially blocked by pedestrians or other objects.

See Owner's Manual, page 234 (Appendix B, page B-9)

Notes:

## Section III

### TEST PROCEDURES

#### A. Test Procedure Overview

Four test scenarios were used, as follows:

Test 1. Subject Vehicle (SV) Encounters Stopped Principal Other Vehicle (POV)

Test 2. Subject Vehicle Encounters Slower Principal Other Vehicle

Test 3. Subject Vehicle Encounters Decelerating Principal Other Vehicle

Test 4. Subject Vehicle Encounters Steel Trench Plate

An overview of each of the test procedures follows.

#### 1. TEST 1 – SUBJECT VEHICLE ENCOUNTERS STOPPED PRINCIPAL OTHER VEHICLE ON A STRAIGHT ROAD

This test evaluates the ability of the CIB system to detect and respond to a stopped lead vehicle in the immediate forward path of the SV, as depicted in Figure 1.

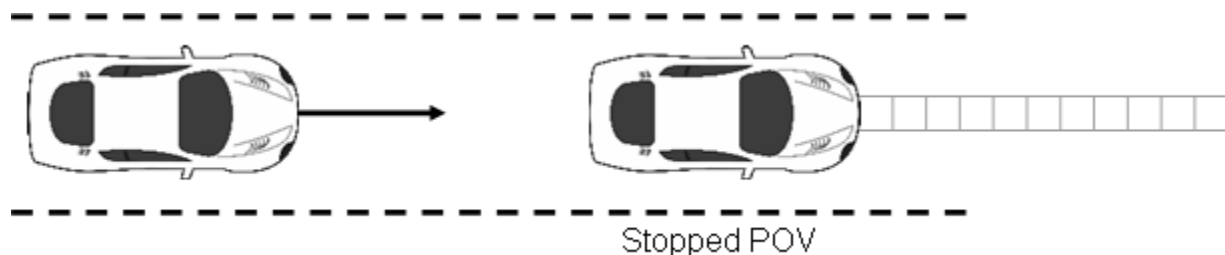


Figure 1. Depiction of Test 1

##### a. Procedure

The POV was parked in the center of a travel lane, with its longitudinal axis oriented parallel to the roadway edge and facing the same direction as the SV so that the SV approached the rear of the POV.

The SV ignition was cycled prior to each test run. The SV was driven at a nominal speed of 25 mph (40.2 km/h) in the center of the lane of travel, toward the parked POV. The SV throttle pedal was released within 500 ms after  $t_{FCW}$ , i.e. within 500 ms of the FCW alert. The test concluded when either:

- The SV came into contact with the POV or
- The SV came to a stop before making contact with the POV.

In addition to the general test validity criteria described below, for an individual test trial to be valid, the following was required throughout the test:

- The SV speed could not deviate from the nominal speed by more than 1.0 mph (1.6 km/h) during an interval defined by a Time to Collision (TTC) = 5.1 seconds to  $t_{FCW}$ . For this test, TTC = 5.1 seconds is taken to occur at an SV-to-POV distance of 187 ft (57 m).

b. Criteria

In order to pass the test, the magnitude of the SV speed reduction attributable to CIB intervention must have been  $\geq 9.8$  mph (15.8 km/h) for at least five of seven valid test trials.

The magnitude of the SV speed reduction attributable to CIB intervention was calculated in one of two ways, depending on whether a test trial concluded with the SV colliding with the POV.

- If SV-to-POV contact occurred during a test trial, the CIB speed reduction was calculated by subtracting the SV speed at the time of SV-to-POV contact (i.e., when longitudinal range became zero) from the average SV speed calculated from  $t_{FCW}-100$  ms to  $t_{FCW}$ .
- If SV-to-POV contact did not occur during a test trial (i.e., CIB intervention prevented the crash), the SV speed at a time of SV-to-POV contact was taken to be zero. The speed reduction is therefore equal to the SV speed at  $t_{FCW}$ .

2. TEST 2 – SUBJECT VEHICLE ENCOUNTERS SLOWER PRINCIPAL OTHER VEHICLE

- This test evaluates the ability of the CIB system to detect and respond to a slower-moving lead vehicle traveling at a constant speed in the immediate forward path of the SV, as depicted in Figure 2.

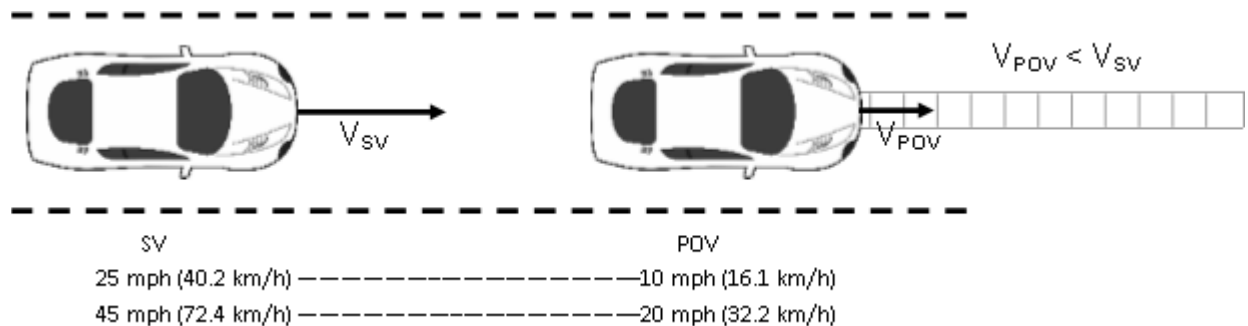


Figure 2. Depiction of Test 2

#### a. Procedure

The SV ignition was cycled prior to each test run. The tests were conducted two ways. In the first, the POV was driven at a constant 10.0 mph (16.1 km/h) in the center of the lane of travel while the SV was driven at 25.0 mph (40.2 km/h), in the center lane of travel, toward the slower-moving POV. In the second, the POV was driven at a constant 20.0 mph (32.2 km/h) in the center of the lane of travel while the SV was driven at 45.0 mph (72.4 km/h), in the center lane of travel, toward the slower-moving POV. In both cases, the SV throttle pedal was released within 500 ms after  $t_{FCW}$ , i.e. within 500 ms of the FCW alert. The test concluded when either:

- The SV came into contact with the POV or
- 1 second after the speed of the SV becomes less than or equal to that of the POV.

The SV driver then braked to a stop.

In addition to the general test validity criteria described below, for an individual test trial to be valid, the following was required throughout the test:

- The lateral distance between the centerline of the POV and the center of the travel lane could not deviate more than  $\pm 1$  ft (0.3 m) during the validity period.
- The lateral distance between the centerline of the SV and the center of the travel lane could not deviate more than  $\pm 1$  ft (0.3 m) during the validity period.
- The SV speed could not deviate more than  $\pm 1.0$  mph ( $\pm 1.6$  km/h) during an interval defined by  $TTC = 5.0$  seconds to  $t_{FCW}$ .
- The POV speed could not deviate more than  $\pm 1.0$  mph ( $\pm 1.6$  km/h) during the validity period.

#### b. Criteria

For the test series in which the initial SV speed was 25 mph, the condition for passing was that there be no SV-to-POV impact for at least five of the seven valid test trials.

In order to pass the test series for which the initial speed of the SV was 45 mph, the magnitude of the SV speed reduction attributable to CIB intervention must have been  $\geq 9.8$  mph (15.8 km/h) for at least five of seven valid test trials. The magnitude of the SV speed reduction attributable to CIB intervention was calculated in one of two ways, depending on whether a test trial concluded with the SV colliding with the POV.

- If SV-to-POV contact occurred during a test trial, the CIB speed reduction was calculated by subtracting the SV speed at the time of SV-to-POV contact (i.e., when longitudinal range became zero) from the average SV speed calculated from  $t_{FCW}-100$  ms to  $t_{FCW}$ .
- If SV-to-POV contact did not occur during a test trial (i.e., CIB intervention



prevented the crash), the CIB speed reduction was calculated by subtracting the SV speed at the minimum longitudinal SV-to-POV range during the validity period from the SV speed at  $t_{FCW}$ .

### 3. TEST 3 – SUBJECT VEHICLE ENCOUNTERS DECELERATING PRINCIPAL OTHER VEHICLE

This test evaluates the ability of the CIB system to detect and respond to a lead vehicle slowing with a constant deceleration in the immediate forward path of the SV, as depicted in Figure 3.

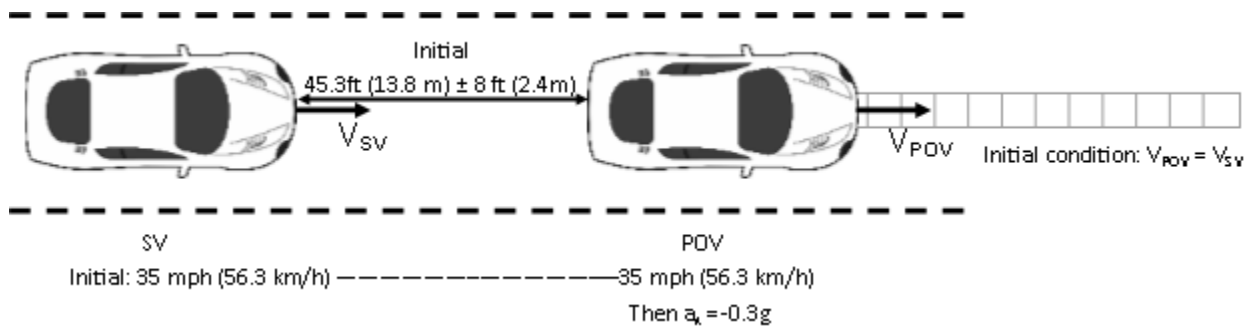


Figure 3. Depiction of Test 3

#### a. Procedure

The SV ignition was cycled prior to each test run. For this test scenario, both the POV and SV were driven at a constant 35.0 mph (56.3 km/h) in the center of the lane, with a headway of 45.3 ft (13.8 m) ± 8 ft (2.4 m). Once these conditions were met, the POV tow vehicle brakes were applied to achieve 0.3 ± 0.03 g of deceleration. The test concluded when either:

- The SV came into contact with the POV or
- For the decelerating POV, 1 second after minimal longitudinal SV-to-POV distance occurred or
- For the POV decelerating to stop case, 1 second after the velocity of the SV became less than or equal to that of the POV.

The SV driver then braked to a stop.

In addition to the general test validity criteria described below, for an individual test trial to be valid, the following was required throughout the test:

- The lateral distance between the centerline of the POV and the center of the travel lane could not deviate more than ±1 ft (0.3 m) during the validity period.
- The lateral distance between the centerline of the SV and the center of the travel lane could not deviate more than ±1 ft (0.3 m) during the validity period.

- The headway between the SV and POV must have been constant from the onset of the applicable validity period to the onset of POV braking.
- The SV and POV speed could not deviate more than  $\pm 1.0$  mph (1.6 km/h) during an interval defined by the onset of the validity period to the onset of POV braking.
- The SV- POV headway distance could not deviate more than  $\pm 8$  ft (2.4 m) during an interval defined by the onset of the validity period to the onset of POV braking.
- The average POV deceleration could not deviate by more than  $\pm 0.03$  g from the nominal 0.3 g deceleration during the interval beginning at 1.5 seconds after the onset of POV braking and ending either 250 ms prior to the POV coming to a stop or the SV coming into contact with the POV.

#### b. Criteria

In order to pass the decelerating POV test series, the magnitude of the SV speed reduction attributable to CIB intervention must have been  $\geq 10.5$  mph (16.9 km/h) for at least five of seven valid test trials. The magnitude of the SV speed reduction attributable to CIB intervention was calculated in one of two ways, depending on whether a test trial concluded with the SV colliding with the POV.

- If SV-to-POV contact occurred during a test trial, the CIB speed reduction was calculated by subtracting the SV speed at the time of SV-to-POV contact (i.e., when longitudinal range becomes zero) from the average SV speed calculated from  $t_{FCW} - 100$  ms to  $t_{FCW}$ .
- If SV-to-POV contact did not occur during a test trial (i.e., CIB intervention prevents the crash), the CIB speed reduction was calculated by subtracting the SV speed at the minimum longitudinal SV-to-POV range during the applicable validity period from the SV speed at  $t_{FCW}$ .

#### 4. TEST 4 – FALSE POSITIVE SUPPRESSION

The false positive suppression test series evaluates the ability of a CIB system to differentiate a steel trench plate (STP) from an object presenting a genuine safety risk to the SV. Although the STP is large and metallic, it is designed to be driven over without risk of injury to the driver or damage to the SV. Therefore, in this scenario, the automatic braking available from CIB is not necessary and should be suppressed. The test condition is nearly equivalent to that previously defined for Test 1, the stopped POV condition, but with an STP in the SV forward path in lieu of a POV.

##### a. Procedure

This test was conducted at two speeds, 25 mph (40.2 km/h) and 45 mph (72.4 km/h). The SV was driven directly towards, and over, the STP, which was positioned in the center of a travel lane, with its longest sides parallel to the road edge.

In addition to the general test validity criteria described below, for an individual test trial to be valid, the following was required throughout the test:

- The SV speed could not deviate from the nominal speed by more than 1.0 mph (1.6 km/h) during an interval defined by a Time to Collision (TTC) = 5.1 seconds to  $t_{FCW}$  where:
  - For SV test speed of 25 mph, TTC = 5.1 seconds is taken to occur at an SV-to-STP distance of 187 ft (57 m).
  - For SV test speed of 45 mph, TTC = 5.1 seconds is taken to occur at an SV-to-STP distance of 337 ft (106 m).
- If the SV did not present an FCW alert before the end of the validity period, SV speed could not deviate more than  $\pm 1.0$  mph ( $\pm 1.6$  km/h) from TTC = 5.1 s to the end of the validity period.

If an FCW alert was presented, the driver released the throttle pedal within 500 ms of the alert. If no alert was presented, the driver did not release the throttle pedal until the end of the validity period. The SV driver then braked to a stop.

#### b. Criteria

In order to pass the False Positive test series, the magnitude of the SV deceleration reduction attributable to CIB intervention must have been  $\leq 0.50$  g for at least five of seven valid test trials.

## B. General Information

### 1. $T_{FCW}$

The time at which the Forward Collision Warning (FCW) activation flag indicates that the system has issued an alert to the SV driver is designated as  $t_{FCW}$ . FCW alerts are typically either visual, haptic or auditory, and the onset of the alert was determined by post-processing the test data.

For systems that implement auditory or haptic alerts, part of the pre-test instrumentation verification process was to determine the tonal frequency of the auditory warning or the vibration frequency of the tactile warning through use of the PSD (Power Spectral Density) function in Matlab. This was accomplished in order to identify the center frequency around which a band-pass filter was applied to subsequent auditory or tactile warning data so that the beginning of such warnings can be programmatically determined. The band-pass filter used for these warning signal types was a phaseless, forward-reverse pass, elliptical (Cauer) digital filter, with filter parameters as listed in Table 1.

**Table 1. Auditory and Tactile Warning Filter Parameters**

<b>Warning Type</b>	<b>Filter Order</b>	<b>Peak-to-Peak Ripple</b>	<b>Minimum Stop Band Attenuation</b>	<b>Passband Frequency Range</b>
Auditory	5 <sup>th</sup>	3 dB	60 dB	Identified Center Frequency $\pm$ 5%
Tactile	5 <sup>th</sup>	3 dB	60 dB	Identified Center Frequency $\pm$ 20%

## 2. GENERAL VALIDITY CRITERIA

In addition to any validity criteria described above for the individual test scenarios, for an individual trial to be valid, it must have met the following criteria throughout the test:

- The SV driver seatbelt was latched.
- If any load had been placed on the SV front passenger seat (e.g., for instrumentation), the vehicle’s front passenger seatbelt was latched.
- The SV was driven at the nominal speed in the center of the travel lane, toward the POV or STP.
- The driver used the least amount of steering input necessary to maintain SV position in the center of the travel lane during the validity period; use of abrupt steering inputs or corrections was avoided.
- The yaw rate of the SV did not exceed  $\pm 1.0$  deg/s from the onset of the validity period to the instant SV deceleration exceeded 0.25 g.
- The SV driver did not apply any force to the brake pedal during the applicable validity period.
- The lateral distance between the centerline of the SV and the centerline of the POV or STP did not deviate more than  $\pm 1$  ft (0.3 m) during the applicable validity period.

### 3. VALIDITY PERIOD

The valid test interval began:

- Test 1: When the SV-to-POV TTC = 5.1 seconds
- Test 2: When the SV-to-POV TTC = 5.0 seconds
- Test 3: 3 seconds before the onset of POV braking
- Test 4: When the SV-to-STP TTC = 5.1 seconds

The valid test interval ended:

Test 1: When either of the following occurred:

- The SV came into contact with the POV (SV-to-POV contact was assessed by using GPS-based range data or by measurement of direct contact sensor output); or
- The SV came to a stop before making contact with the POV.

Tests 2 and 3: When either of the following occurred:

- The SV came into contact with the POV; or
- 1 second after the velocity of the SV became less than or equal to that of the POV.
- 1 second after minimal longitudinal SV-to-POV distance occurred.

Test 4: At the instant the front-most part of SV reached a vertical plane defined by the leading edge of the STP first encountered by the SV (i.e., just before it was driven onto the STP).

### 4. STATIC INSTRUMENTATION CALIBRATION

To assist in resolving uncertain test data, static calibration data was collected prior to each of the test series.

For Tests 1, 2, and 3, the SV, POV, POV moving platform, and tow vehicle were centered in the same travel lane with the same orientation (i.e., facing the same direction). For Test 4, the SV and STP were centered in the same travel lane.

For Tests 1, 2, and 3, the SV was positioned such that it just contacted a vertical plane that defines the rearmost location of the POV. For Test 4, the front-most location of the SV was positioned such that it just reached a vertical plane defined by the leading edge of the STP first encountered by the SV (i.e., just before it is driven onto the STP). This is the “zero position.”

The zero position was documented prior to, and immediately after, conduct of each test series.

If the zero position reported by the data acquisition system was found to differ by more than  $\pm 2$  in ( $\pm 5$  cm) from that measured during collection of the pre-test static calibration data file, the pre-test longitudinal offset was adjusted to output zero and another pre-test static calibration data file was collected. If the zero position reported by the data acquisition system was found to differ by more than  $\pm 2$  in ( $\pm 5$  cm) from that measured during collection of the post-test static calibration data file, the test trials performed between collection of that post-test static calibration data file and the last valid pre-test static calibration data file were repeated.

Static data files were collected prior to, and immediately after, conducting each of the test series. The pre-test static files were reviewed prior to test conduct to confirm that all data channels were operational and were properly configured.

## 5. NUMBER OF TRIALS

A target total of seven (7) valid trials were performed for each scenario. In cases where the test driver performed more than seven trials, the first seven trials satisfying all test tolerances were used to assess the SV performance.

## 6. TRANSMISSION

All trials were performed with SV automatic transmissions in “Drive” or with manual transmissions in the highest gear capable of sustaining the desired test speed. Manual transmission clutches remained engaged during all maneuvers. The brake lights of the POV were not illuminated.

### **C. Principal Other Vehicle**

CIB testing requires a POV that realistically represents typical vehicles, does not suffer damage or cause damage to a test vehicle in the event of collision, and can be accurately positioned and moved during the tests. The tests reported herein made use of the NHTSA developed Strikeable Surrogate Vehicle (SSV).

This SSV system was designed specifically for common rear-end crash scenarios which AEB systems address. The key components of the SSV system are:

- A POV shell which is a visually and dimensionally accurate representation of a passenger car.
- A slider and load frame assembly to which the shell is attached.
- A two-rail track on which the slider operates.
- A road-based lateral restraint track.
- A tow vehicle.

The key requirements of the POV element are to:

- Provide an accurate representation of a real vehicle to CIB sensors, including cameras and radar.
- Be resistant to damage and inflict little or no damage to the SV as a result of repeated SV-to-POV impacts.

The key requirements of the POV delivery system are to:

- Accurately control the nominal POV speed up to 35 mph (56 km/h).
- Accurately control the lateral position of the POV within the travel lane.
- Allow the POV to move away from the SV after an impact occurs.

Operationally, the POV shell is attached to the slider and load frame which includes rollers that allows the entire assembly to move longitudinally along the guide rail. The guide rail is coupled to a tow vehicle and guided by the lateral restraint track secured to the test track surface. The rail includes a provision for restraining the shell and roller assembly in the ward direction. In operation, the shell and roller assembly engage the rail assembly through detents to prevent relative motion during run-up to test speeds and deceleration of the tow vehicle. The combination of rearward stops and forward motion detents allows the test conditions, such as relative SV-to-POV headway distance, speed, etc., to be achieved and adjusted as needed in the preliminary part of a test. If during the test, the SV strikes the rear of the POV shell, the detents are overcome and the entire shell/roller assembly moves forward in a two-stage manner along the rail and away from the SV. The forward end of the rail has a cushioned stop to restrain forward motion of the shell/roller assembly. After impacting the SSV, the SV driver uses the steering wheel to maintain SV position in the center of the travel lane, thereby straddling the two-rail track. The SV driver must manually apply the SV brakes after impact. The SSV system is shown in Figures A6 through A8 and a detailed description can be found in the NHTSA report: NHTSA'S STRIKEABLE SURROGATE VEHICLE PRELIMINARY DESIGN+OVERVIEW, May 2013.

#### **D. Automatic Braking System**

The POV was equipped with an automatic braking system, which was used in Test 3. The braking system consisted of the following components:

- Electronically controlled linear actuator, mounted on the seat rail and attached to the brake pedal. The actuator can be programmed for control of stroke and rate.
- PC module programmed for control of the stroke and rate of the linear actuator.
- Switch to activate actuator.

In some cases, the SV is also equipped with an automatic braking system (E-brake) for the purpose of slowing the SV before impact with the SSV in cases where the SV is

likely to fail a test. The system fires when TTC is below 0.7 sec. It is typically enabled when an SV has already impacted the SSV one or two times.

### **E. Instrumentation**

Table 2 lists the sensors, signal conditioning, and data acquisition equipment used for these tests.



**Table 2. Test Instrumentation and Equipment**

Type	Output	Range	Accuracy, Other Primary Specs	Mfr, Model	Serial Number	Calibration Dates Last Due
Tire Pressure Gauge	Vehicle Tire Pressure	0-100 psi 0-690 kPa	< 1% error between 20 and 100 psi	Omega DPG8001	17042707002	By: DRI Date: 8/18/2020 Due: 8/18/2021
Platform Scales	Vehicle Total, Wheel, and Axle Load	2200 lb/platform	0.1% of reading	Intercomp SW wireless	0410MN20001	By: DRI Date: 2/10/2021 Due: 2/10/2022
Linear (string) encoder	Throttle pedal travel	10 in 254 mm	0.1 in 2.54 mm	UniMeasure LX-EP	45050091	By: DRI Date: 4/15/2021 Due: 4/15/2022
Differential Global Positioning System	Position, Velocity	Latitude: $\pm 90$ deg Longitude: $\pm 180$ deg Altitude: 0-18 km Velocity: 0-1000 knots	Horizontal Position: $\pm 1$ cm Vertical Position: $\pm 2$ cm Velocity: 0.05 km/h	Trimble GPS Receiver, 5700 (base station and in-vehicle)	00440100989	N/A
Multi-Axis Inertial Sensing System	Position; Longitudinal, Lateral, and Vertical Accels; Lateral, Longitudinal and Vertical Velocities; Roll, Pitch, Yaw Rates; Roll, Pitch, Yaw Angles	Accels $\pm 10g$ , Angular Rate $\pm 100$ deg/s, Angle $>45$ deg, Velocity $>200$ km/h	Accels .01g, Angular Rate 0.05 deg/s, Angle 0.05 deg, Velocity 0.1 km/h	Oxford Inertial +		By: Oxford Technical Solutions
					2176	Date: 6/26/2020 Due: 6/26/2022
					2182	Date: 9/16/2019 Due: 9/16/2021

**Table 2. Test Instrumentation and Equipment (continued)**

Type	Output	Range	Accuracy, Other Primary Specs	Mfr, Model	Serial Number	Calibration Dates Last Due
Real-Time Calculation of Position and Velocity Relative to Lane Markings (LDW) and POV (FCW)	Distance and Velocity to lane markings (LDW) and POV (FCW)	Lateral Lane Dist: ±30 m Lateral Lane Velocity: ±20 m/sec Longitudinal Range to POV: ±200 m Longitudinal Range Rate: ±50 m/sec	Lateral Distance to Lane Marking: ±2 cm Lateral Velocity to Lane Marking: ±0.02m/sec Longitudinal Range: ±3 cm Longitudinal Range Rate: ±0.02 m/sec	Oxford Technical Solutions (OXTS), RT-Range	97	N/A
Microphone	Sound (to measure time at alert)	Frequency Response: 80 Hz – 20 kHz	Signal-to-noise: 64 dB, 1 kHz at 1 Pa	Audio-Technica AT899	N/A	N/A
Light Sensor	Light intensity (to measure time at alert)	Spectral Bandwidth: 440-800 nm	Rise time < 10 msec	DRI designed and developed Light Sensor	N/A	N/A
Accelerometer	Acceleration (to measure time at alert)	±5g	≤ 3% of full range	Silicon Designs, 2210-005	N/A	N/A
Coordinate Measurement Machine	Inertial Sensing System Coordinates	0-8 ft 0-2.4 m	±.0020 in. ±.051 mm (Single point articulation accuracy)	Faro Arm, Fusion	UO8-05-08-06636	By: DRI Date: 1/6/2021 Due: 1/6/2022
Type	Description			Mfr, Model	Serial Number	
Data Acquisition System	Data acquisition is achieved using a dSPACE MicroAutoBox II. Data from the Oxford IMU, including Longitudinal, Lateral, and Vertical Acceleration, Roll, Yaw, and Pitch Rate, Forward and Lateral Velocity, Roll and Pitch Angle are sent over Ethernet to the MicroAutoBox. The Oxford IMUs are calibrated per the manufacturer's recommended schedule (listed above).			dSPACE Micro-Autobox II 1401/1513		
				Base Board		549068
				I/O Board		588523

## APPENDIX A

### Photographs

## LIST OF FIGURES


	Page
Figure A1. Front View of Subject Vehicle .....	A-3
Figure A2. Rear View of Subject Vehicle.....	A-4
Figure A3. Window Sticker (Monroney Label) .....	A-5
Figure A4. Vehicle Certification Label .....	A-6
Figure A5. Tire Placard .....	A-7
Figure A6. Rear View of Principal Other Vehicle (SSV) .....	A-8
Figure A7. Load Frame/Slider of SSV .....	A-9
Figure A8. Two-Rail Track and Road-Based Lateral Restraint Track.....	A-10
Figure A9. Steel Trench Plate .....	A-11
Figure A10. DGPS, Inertial Measurement Unit, and MicroAutoBox Installed in Subject Vehicle .....	A-12
Figure A11. Sensor for Detecting Auditory Alerts .....	A-13
Figure A12. Computer Installed in Subject Vehicle .....	A-14
Figure A13. Brake Actuator Installed in POV System.....	A-15
Figure A14. AEB Setup Menus (page 1 of 2) .....	A-16
Figure A15. AEB Setup Menus (page 2 of 2) .....	A-17
Figure A16. Visual Alert.....	A-18



Figure A1. Front View of Subject Vehicle



Figure A2. Rear View of Subject Vehicle



### 2021 ENVISION PREFERRED AWD

EXTERIOR: EBONY TWILIGHT METALLIC ECOTEC ENGINE, 2.0L TURBO,  
 INTERIOR: EBONY W/ EBONY ACCENTS TRANSMISSION, 9-SPD AUTOMATIC

Visit us at [www.buick.com](http://www.buick.com)

#### STANDARD EQUIPMENT

ITEMS FEATURED BELOW ARE INCLUDED AT NO EXTRA CHARGE IN THE STANDARD VEHICLE PRICE SHOWN

#### OWNER BENEFITS

- 3 YEAR / 36,000 MILE\* BUMPER-TO-BUMPER LIMITED WARRANTY
- 5 YEAR / 60,000 MILE\* POWERTRAIN LIMITED WARRANTY, ROADSIDE ASSISTANCE & COURTESY TRANSPORTATION
- FIRST MAINTENANCE VISIT
- \*\*WHICHEVER COMES FIRST SEE BUICK.COM OR DEALER FOR TERMS, DETAILS & LIMITS

#### PERFORMANCE & MECHANICAL

- 17" SPARE WHEEL
- ENGINE STOP-START W/DISABLE SWITCH
- ELECTRONIC PRECISION SHIFT WITH DRIVE MODE SELECTOR
- INTELLIGENT AWD W/ ACTIVE

- TWIN CLUTCH
- STABILITRAK-TRACTION CONTROL

#### CONNECTIVITY & TECHNOLOGY

- ONSTAR (R) SERVICES & 4G LTE WI-FI (R) AVAILABLE; SEE ONSTAR.COM FOR TERMS
- SIRIUSXM RADIO CAPABLE, ALL ACCESS TRIAL W/ SUBSCRIPTION SOLD SEPARATELY
- KEYLESS ENTRY & START

#### INTERIOR

- BUICK QUIETTUNING WITH ACTIVE NOISE CANCELLATION
- 8-WAY POWER DRIVER SEAT WITH 4-WAY POWER LUMBAR
- 60/40 SPLIT-BENCH REAR FOLDING SEAT
- LEATHER WRAPPED STEERING WHEEL

#### EXTERIOR

- LED HEADLAMPS

- LUGGAGE RACK, ROOF-RAILS
- MANUAL-FOLDING, POWER ADJUSTABLE, OUTSIDE HEATED REARVIEW MIRRORS WITH DRIVER-SIDE LIGHT SENSITIVE

#### SAFETY & SECURITY

- BUICK DRIVER CONFIDENCE PLUS:
  - FRONT PEDESTRIAN BRAKING
  - LANE KEEP ASSIST W/ LANE DEPARTURE WARNING
  - FORWARD COLLISION ALERT
  - AUTOMATIC EMERGENCY BRAKING
  - FOLLOWING DISTANCE INDICATOR
  - INTELLIBEAM-AUTO HIGH BEAM
  - LANE CHANGE ALERT WITH SIDE BLIND ZONE ALERT
  - REAR CROSS TRAFFIC ALERT
  - REAR PARK ASSIST
  - HD REAR VISION CAMERA
  - TEEN DRIVER
  - SAFETY ALERT SEAT

- TIRE PRESSURE MONITOR SYSTEM

MANUFACTURER'S SUGGESTED RETAIL PRICE

**STANDARD VEHICLE PRICE \$33,600.00**

#### OPTIONS & PRICING

OPTIONS INSTALLED BY THE MANUFACTURER (MAY REPLACE STANDARD EQUIPMENT SHOWN)

- COMFORT AND CONVENIENCE PACKAGE 1,750.00
- AIR IONIZER WITH AIR QUALITY INDICATOR
- HEATED STEERING WHEEL
- HANDS-FREE, PROGRAMMABLE POWER LIFTGATE WITH LOGO PROJECTION
- REMOTE VEHICLE STARTER SYSTEM
- DRIVER & FRONT PASSENGER HEATED SEATS
- 7-SPEAKER ENHANCED AUDIO SYSTEM WITH AMPLIFIER
- DUAL-ZONE AUTOMATIC CLIMATE

- CONTROL
- BUICK INFOTAINMENT SYSTEM W/ 10" DIAG. HD COLOR TOUCHSCREEN, VOICE RECOGNITION, BLUETOOTH AUDIO STREAMING, WIRELESS APPLE CARPLAY & WIRELESS ANDROID AUTO CAPABLE, IN-VEHICLE APPS, PERSONALIZED PROFILES
- SPORT TOURING PACKAGE: 1,325.00
  - BODY COLOR DOOR HANDLES
  - REAR CARGO COMPARTMENT COVER
  - BLACK ROOF RAILS
  - 20" ALUMINUM WHEELS WITH DARK FINISH
  - MOLDINGS WITH DARK GLOSS FINISH
  - UNIQUE ST BADGING, DARK GRILLE SURROUND AND MESH INSERTS
  - EBONY TWILIGHT METALLIC 495.00

TOTAL OPTIONS \$3,570.00  
 TOTAL VEHICLE & OPTIONS \$37,170.00  
 DESTINATION CHARGE 1,195.00

**TOTAL VEHICLE PRICE\* \$38,365.00**

#### EPA DOT Fuel Economy and Environment

**Fuel Economy**

**25** MPG combined city/hwy  
 22 city  
 29 highway

Small SUVs range from 16 to 125 MPG. The best vehicle rates 141 MPGe.

**You spend \$500 more in fuel costs over 5 years** compared to the average new vehicle.

4.0 gallons per 100 miles

**Annual fuel cost \$1,600**

**Fuel Economy & Greenhouse Gas Rating (tailpipe only)** 5

**Smog Rating (tailpipe only)** 7

This vehicle emits 352 grams CO<sub>2</sub> per mile. The best emits 0 grams per mile (tailpipe only). Producing and distributing fuel also create emissions; learn more at [fuelconomy.gov](http://fuelconomy.gov)

Actual results will vary for many reasons, including driving conditions and how you drive and maintain your vehicle. The average new vehicle gets 27 MPG and costs \$7,500 to fuel over 5 years. Cost estimates are based on 15,000 miles per year at \$2.70 per gallon. MPGe is miles per gasoline gallon equivalent. Vehicle emissions are a significant cause of climate change and smog.

[fuelconomy.gov](http://fuelconomy.gov)  
 Calculate personalized estimates and compare vehicles

#### Gasoline Vehicle

#### GOVERNMENT 5-STAR SAFETY RATINGS

**Overall Vehicle Score To Be Rated**  
 Based on the combined ratings of frontal, side and rollover. Should ONLY be compared to other vehicles of similar size and weight.

<b>Frontal Crash</b>	<b>Driver Passenger</b>	<b>To Be Rated</b>
Based on the risk of injury in a frontal impact. Should ONLY be compared to other vehicles of similar size and weight.		
<b>Side Crash</b>	<b>Front seat Rear seat</b>	<b>To Be Rated</b>
Based on the risk of injury in a side impact.		
<b>Rollover</b>	<b>To Be Rated</b>	
Based on the risk of rollover in a single-vehicle crash.		

Star ratings range from 1 to 5 stars (★★★★★) with 5 being the highest.  
 Source: National Highway Traffic Safety Administration (NHTSA)  
[www.safercar.gov](http://www.safercar.gov) or 1-888-327-4236

#### PARTS CONTENT INFORMATION

FOR VEHICLES IN THIS CARLINE:  
 U.S./CANADIAN PARTS CONTENT: 1%  
 MAJOR SOURCES OF FOREIGN PARTS CONTENT: CHINA 94%

NOTE: PARTS CONTENT DOES NOT INCLUDE FINAL ASSEMBLY, DISTRIBUTION, OR OTHER NON-PARTS COSTS.

FOR THIS VEHICLE:  
 FINAL ASSEMBLY POINT:  
 YANTAI ETDZ, P.R., CHINA  
 COUNTRY OF ORIGIN:  
 ENGINE: CHINA  
 TRANSMISSION: CHINA

OnStar logo  
 Equipped with the safety and security of OnStar.  
 Visit [onstar.com](http://onstar.com) for details.

**WARNING**  
 Cancer and Reproductive Harm  
[www.P65Warnings.ca.gov/](http://www.P65Warnings.ca.gov/)  
 passenger-vehicle  
 SEE OWNER'S MANUAL

ORDER NO. J19999 SALES CODE E  
 SALES MODEL CODE 40000  
 DEALER NO. 48514  
 FINAL ASSEMBLY:  
 YANTAI ETDZ, P.R., CHINA  
 VIN LRBFZMR45MD08  
 DEALER TO WHOM DELIVERED

QR code  
**BM**  
 C

Figure A3. Window Sticker (Monroney Label)

**GM** MFD BY SAIC GENERAL MOTORS CORPORATION LIMITED FOR GENERAL MOTORS LLC 01/21

GVWR	GAWR FRT	GAWR RR
2300 KG	1270 KG	1225 KG
5070 LB	2799 LB	2700 LB

THIS VEHICLE CONFORMS TO ALL APPLICABLE U.S. FEDERAL MOTOR VEHICLE SAFETY AND THEFT PREVENTION STANDARDS IN EFFECT ON THE DATE OF MANUFACTURE SHOWN ABOVE.

**LRBFZMR45MD09** TYPE: M.P.V.

MODEL: ZX26

ZBDL	TIRE SIZE	SPEED RTG	RIM	COLD TIRE PRESSURE
FRT	245/45R20	H	20X8.5J	240KPA(35PSI)
RR	245/45R20	H	20X8.5J	240KPA(35PSI)
SPA	T145/70R17	M	17X4B	420KPA(60PSI)


SEE OWNER'S MANUAL  FOR MORE INFORMATION.

Figure A4. Vehicle Certification Label





# TIRE AND LOADING INFORMATION

SEATING CAPACITY

TOTAL 5

FRONT 2

REAR 3

The combined weight of occupants and cargo should never exceed 525 kg or 1158 lbs.

TIRE	ORIGINAL SIZE		COLD TIRE PRESSURE
FRONT	245/45R20	H	240 kPa, 35 PSI
REAR	245/45R20	H	240 kPa, 35 PSI
SPARE	T145/70R17	M	420 kPa, 60 PSI

**SEE OWNER'S  
MANUAL FOR  
ADDITIONAL  
INFORMATION**

LRBFZMR45MD09

Figure A5. Tire Placard



Figure A6. Rear View of Principal Other Vehicle (SSV)



Figure A7. Load Frame/Slider of SSV

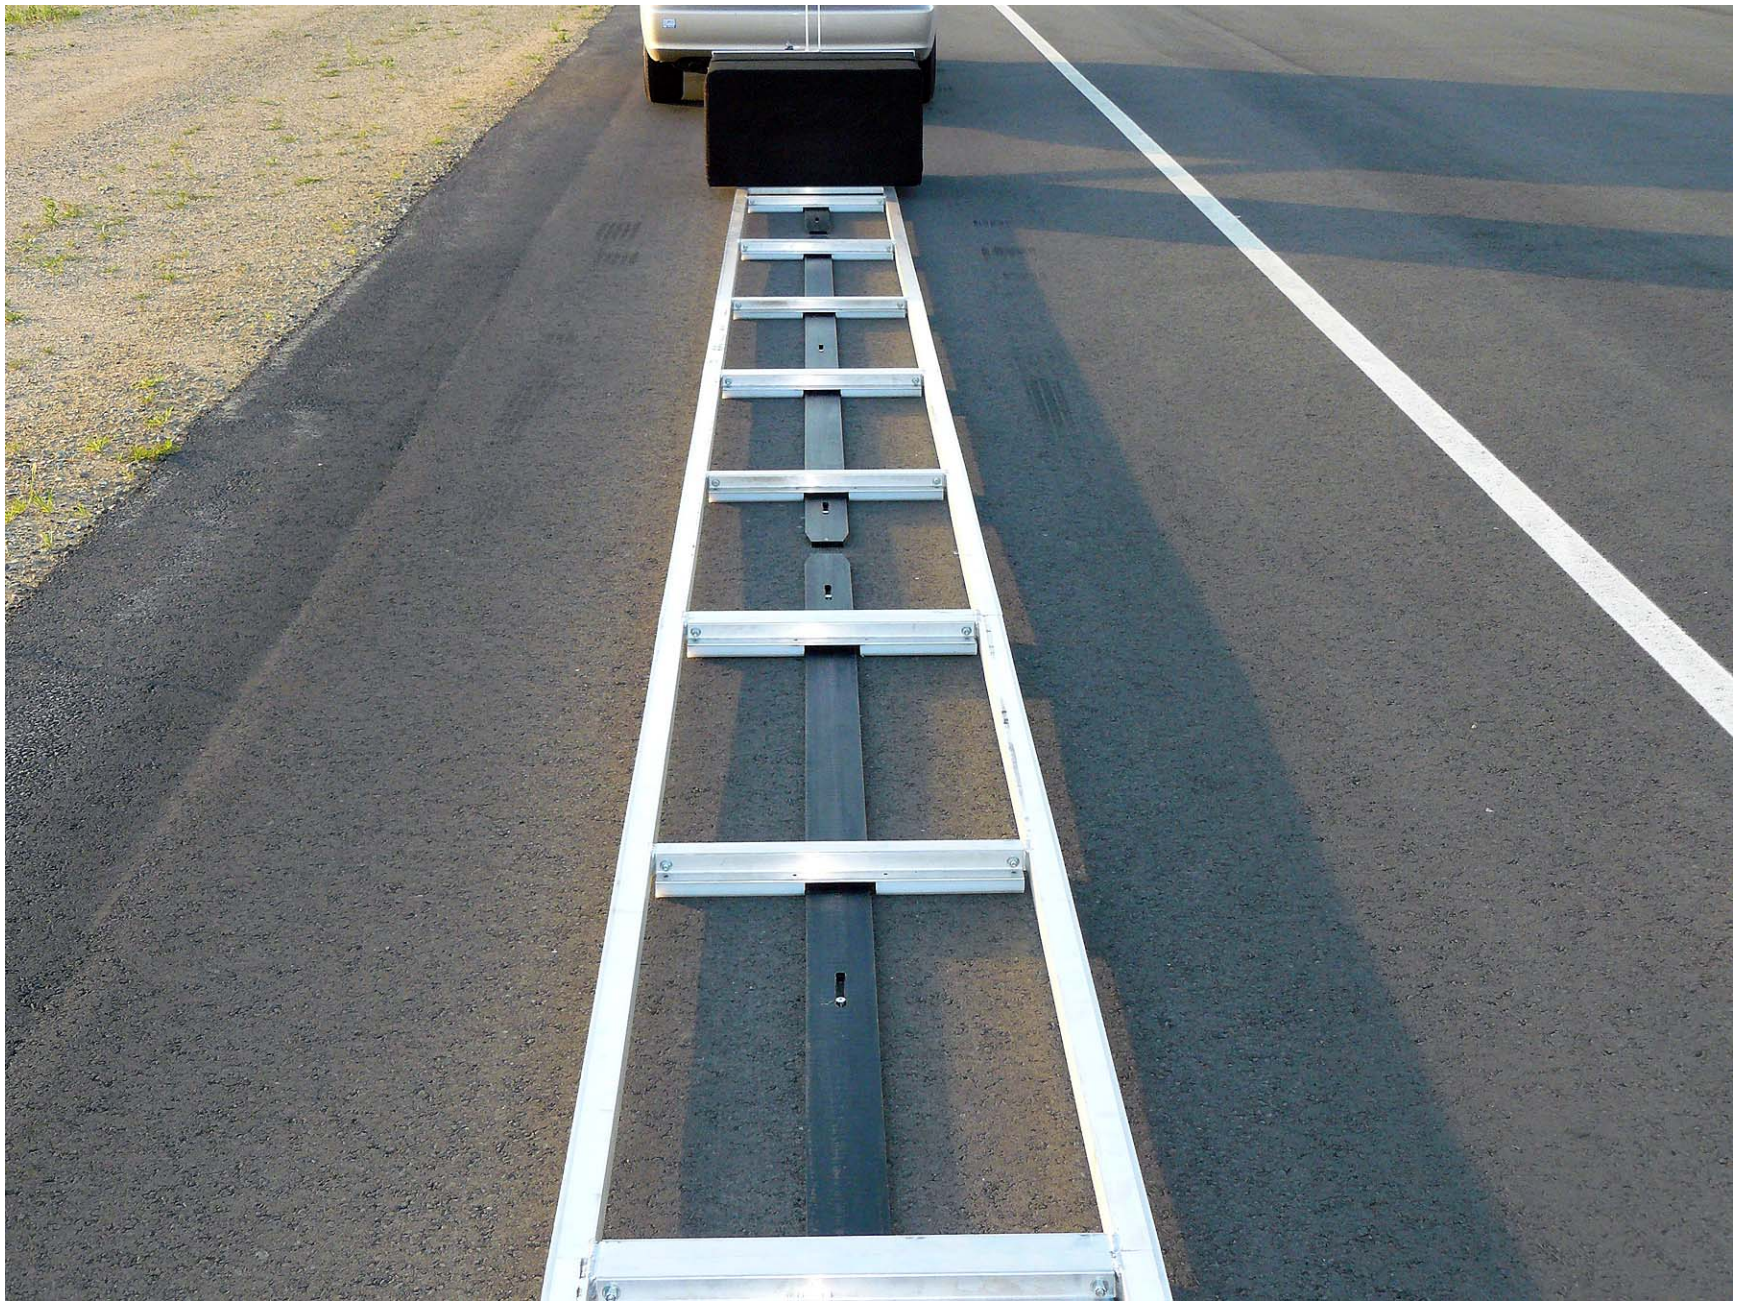


Figure A8. Two-Rail Track and Road-Based Lateral Restraint Track



Figure A9. Steel Trench Plate



Figure A10. DGPS, Inertial Measurement Unit, and MicroAutoBox Installed in Subject Vehicle



Figure A11. Sensor for Detecting Auditory Alerts



Figure A12. Computer Installed in Subject Vehicle





Figure A13. Brake Actuator Installed in POV System


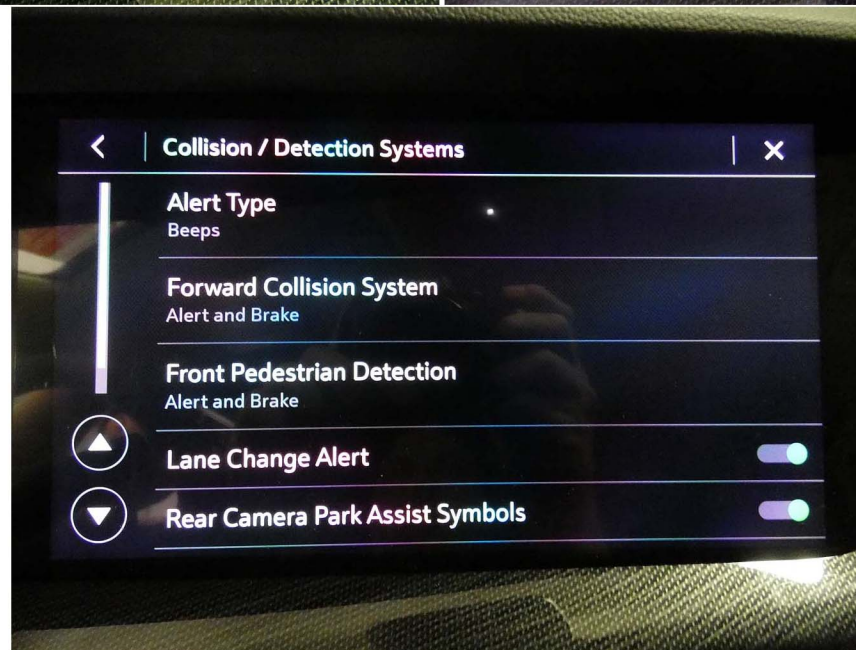


Figure A14. AEB Setup Menus (page 1 of 2)











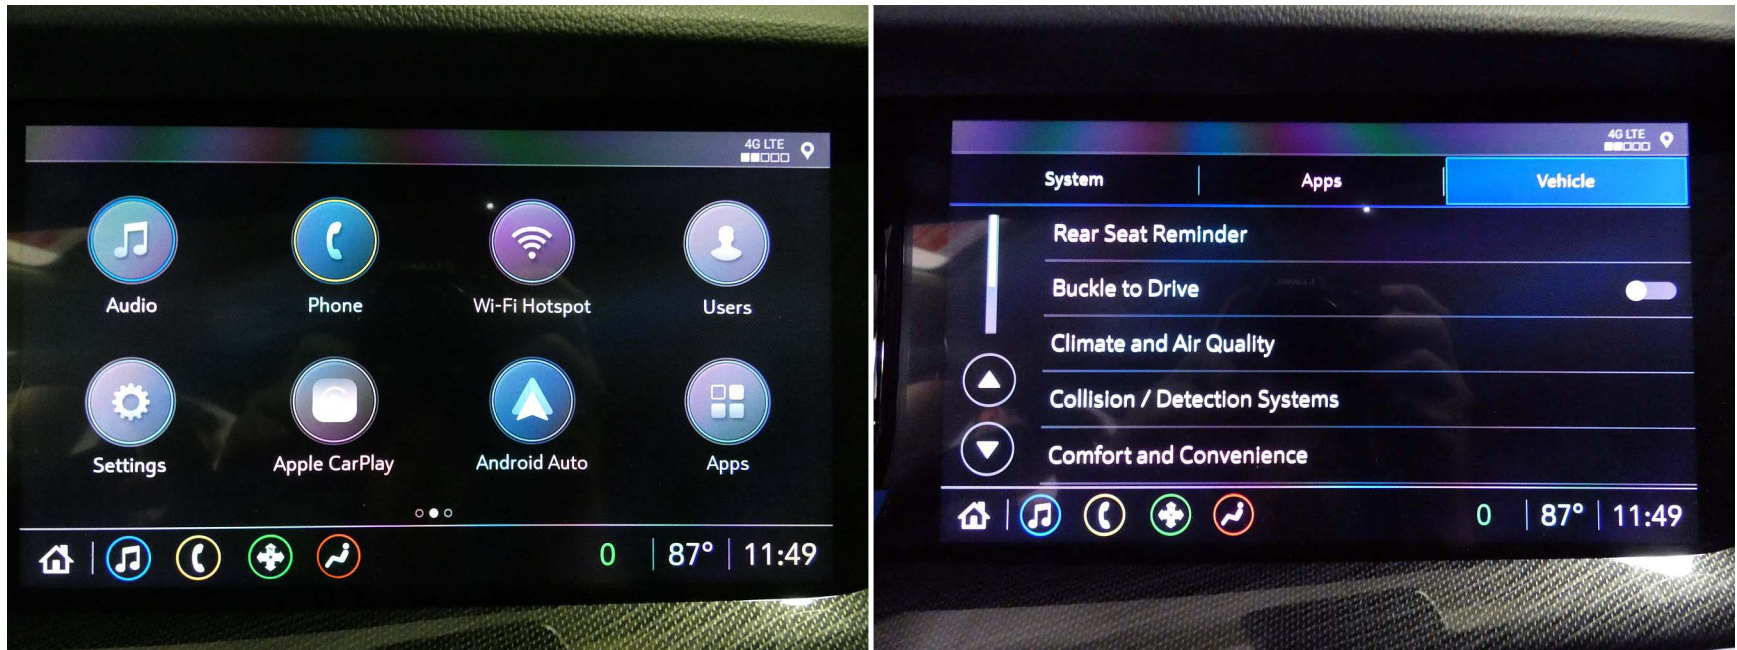



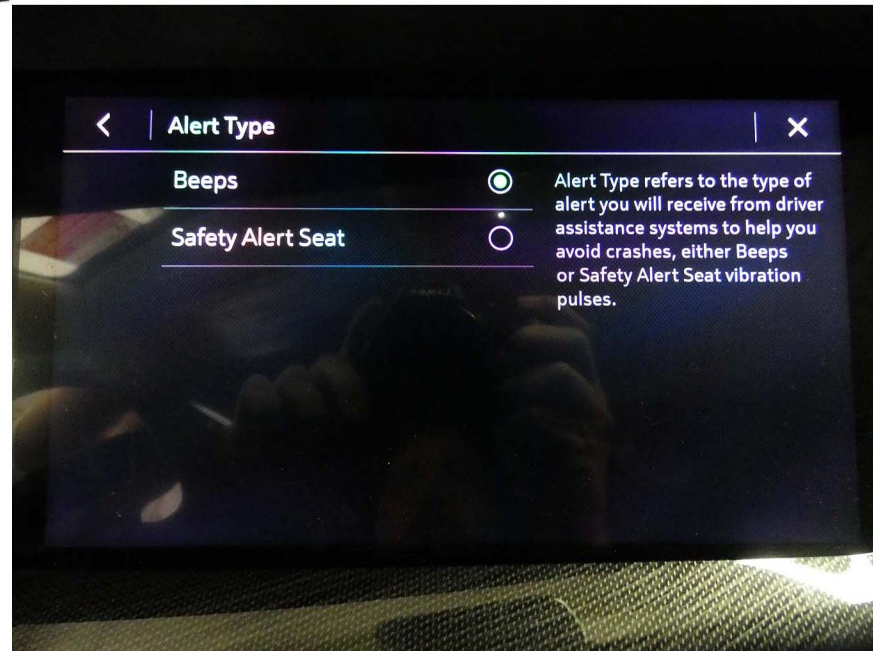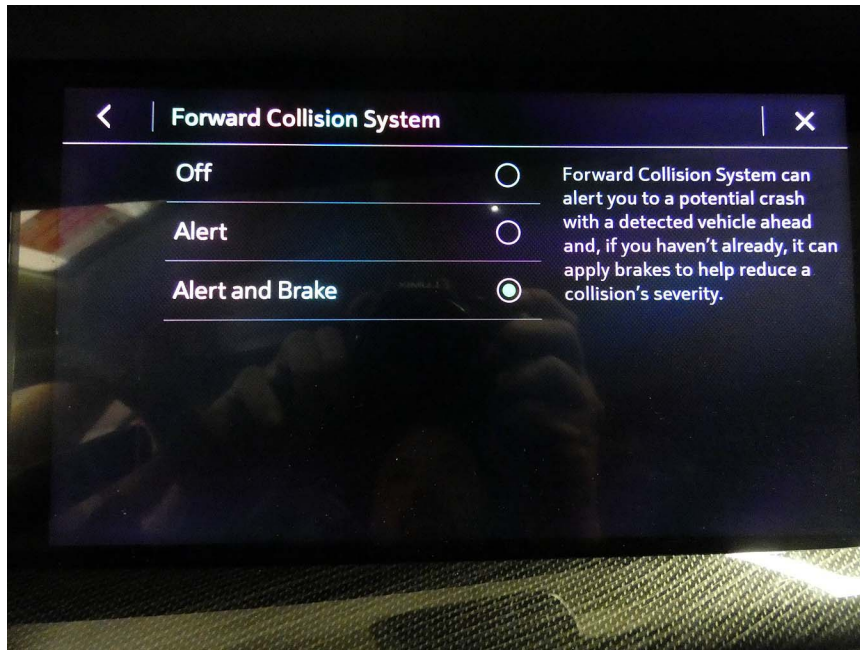













Figure A15. AEB Setup Menus (page 2 of 2)

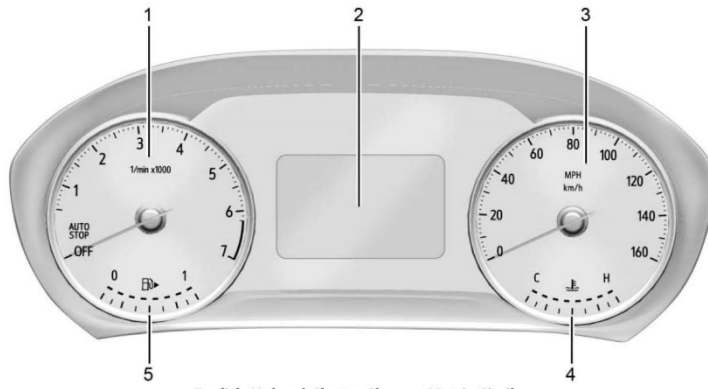


Figure A16. Visual Alert

## APPENDIX B

Excerpts from Owner's Manual

 : Forward Collision Alert	 : Side Blind Zone Alert
 : Fuse Block Cover Lock Location	 : Stop/Start
 : Fuses	 : Tire Pressure Monitor
 : ISOFIX/LATCH System Child Restraints	 : Traction Control/StabiliTrak/Electronic Stability Control (ESC)
 : Keep Fuse Block Covers Properly Installed	 : Under Pressure
 : Lane Change Alert	 : Vehicle Ahead Indicator
 : Lane Departure Warning	
 : Lane Keep Assist	
 : Malfunction Indicator Lamp	
 : Oil Pressure	
 : Park Assist	
 : Pedestrian Ahead Indicator	
 : Power	
 : Rear Cross Traffic Alert	
 : Registered Technician	
 : Remote Vehicle Start	
 : Risk of Electrical Fire	
 : Seat Belt Reminders	




English Uplevel Cluster Shown, Metric Similar

- |   |  |
|---|--|
| <ul style="list-style-type: none"> <li>1. Tachometer ⇨ 92</li> <li>2. Driver Information Center (DIC) ⇨ 103</li> <li>3. Speedometer ⇨ 92</li> </ul> | <ul style="list-style-type: none"> <li>4. Engine Coolant Temperature Gauge ⇨ 93</li> <li>5. Fuel Gauge ⇨ 92</li> </ul> |
|---|--|

**Cluster Menu**

There is an interactive display area in the center of the instrument cluster.



Use the right steering wheel control to open and scroll through the different items and displays.

Press < or > to access the cluster applications. Use the thumbwheel to scroll through the list of available features within the applications. Not all applications or features will be available on all vehicles.

- Home Page

98 Instruments and Controls

If both the ABS warning light and the brake system warning light are on, ABS is not functioning and there is a problem with the regular brakes. See your dealer for service.

See *Brake System Warning Light* ⇨ 96.

**All-Wheel-Drive Light**



All-Wheel-Drive Light



Front-Wheel-Drive Light

If equipped, the corresponding light comes on when an All-Wheel Drive (AWD) mode or Front-Wheel-Drive mode is selected. See *Driver Mode Control* ⇨ 212.

If the light turns amber, there may be a malfunction. See your dealer.

**Hill Descent Control Light**



If equipped, the Hill Descent Control light comes on when the system is ready for use. When the light flashes, the system is active.

See *Hill Descent Control (HDC)* ⇨ 211.

**Lane Keep Assist (LKA) Light**



After the vehicle is started, this light turns off and stays off if LKA has not been turned on or is unavailable.

If equipped, this light is white if LKA is turned on, but not ready to assist. This light is green if LKA is turned on and is ready to assist.


LKA may assist by gently turning the steering wheel if the vehicle approaches a detected lane marking. The LKA light is amber when assisting.

This light flashes amber as a Lane Departure Warning (LDW) alert, to indicate that the lane marking has been unintentionally crossed.

LKA will not assist or alert if the turn signal is active in the direction of lane departure, or if LKA detects that you are accelerating, braking, or actively steering.

See *Lane Keep Assist (LKA)* ⇨ 238.

**Automatic Emergency Braking (AEB) Disabled Light**



This indicator will display when Automatic Emergency Braking or Front Pedestrian Braking has been turned off or is currently unavailable due to malfunction.



See *Automatic Emergency Braking (AEB)*  
 ⇨ 234.

See *Front Pedestrian Braking (FPB) System*  
 ⇨ 235.

**Vehicle Ahead Indicator**



If equipped, this indicator will display green when a vehicle is detected ahead and amber when you are following a vehicle ahead much too closely.

See *Forward Collision Alert (FCA) System*  
 ⇨ 231.

**Pedestrian Ahead Indicator**



If equipped, this indicator will display amber when a nearby pedestrian is detected in front of the vehicle.

See *Front Pedestrian Braking (FPB) System*  
 ⇨ 235.

**Traction Off Light**



This light comes on briefly when the vehicle is turned on. If it does not, have the vehicle serviced by your dealer. If the system is working normally, the indicator light then turns off.

The traction off light comes on when the Traction Control System (TCS) has been turned off. If StabiliTrak/Electronic Stability Control (ESC) is turned off, TCS is also turned off. To turn TCS and ESC off and on, see *Traction Control/Electronic Stability Control* ⇨ 210.

If TCS is off, wheel spin is not limited unless necessary to help protect the driveline from damage. Adjust driving accordingly.

**StabiliTrak OFF Light**



This light comes on briefly when the vehicle is turned on. If the light does not come on, have the vehicle serviced by your dealer. If the system is working normally, the indicator light then turns off.

This light comes on when the StabiliTrak/Electronic Stability Control (ESC) system is turned off. If StabiliTrak/ESC is off, the Traction Control System (TCS) is also off. To turn ESC off and on, see *Traction Control/Electronic Stability Control* ⇨ 210.

If ESC and TCS are off, the systems do not assist in controlling the vehicle. Adjust driving accordingly.

## Engine Power Messages

### REDUCED ACCELERATION DRIVE WITH CARE

This message displays when the vehicle propulsion power is reduced. A reduction in propulsion power can affect the vehicle's ability to accelerate. If this message is on, but there is no observed reduction in performance, proceed to your destination. Under certain conditions, the performance may be reduced the next time the vehicle is driven. The vehicle may be driven while this message is on, but maximum acceleration and speed may be reduced. Anytime this message stays on, or displays repeatedly, the vehicle should be taken to your dealer for service as soon as possible.

Under certain operating conditions, propulsion will be disabled. Try restarting after the ignition has been off for two minutes.

## Vehicle Speed Messages

### SPEED LIMITED TO XXX KM/H (MPH)

This message shows that the vehicle speed has been limited to the speed displayed. The limited speed is a protection for various




propulsion and vehicle systems, such as lubrication, thermal, brakes, suspension, Teen Driver if equipped, or tires.

## Vehicle Personalization

The following are all possible vehicle personalization features. Depending on the vehicle, some may not be available.

For System, Apps, and Personal features and functions, see *Settings* ⇨ 159.

To access the vehicle personalization menu:

1. Touch the Settings icon on the Home Page of the infotainment display.
2. Touch Vehicle to display a list of available options.
3. Touch to select the desired feature setting.
4. Touch  or  to turn a feature off or on.
5. Touch  to go to the top level of the Settings menu.

The menu may contain the following:

### Rear Seat Reminder

This allows for a chime and a message when the rear door has been opened before or during operation of the vehicle.

Touch Off or On.

### Buckle to Drive

This feature can prevent shifting out of Park when the driver, and if applicable the front passenger, seat belt is not buckled. See *Buckle To Drive* ⇨ 42.

Touch Off or On.

### Climate and Air Quality

Touch and the following may display:

- Auto Fan Speed
- Air Quality Sensor
- Pollution Control
- Auto Cooled Seats
- Auto Heated Seats
- Auto Defog
- Auto Rear Defog
- Ionizer

### Auto Fan Speed

This setting specifies the amount of airflow when the climate control fan setting is Auto Fan.

Touch Low, Medium, or High.

**Air Quality Sensor**

This allows for selection of air quality sensor operation at high or low sensitivity.

Select Off, Low Sensitivity, or High Sensitivity.

**Pollution Control**

When set to on, this turns on the Recirculation Mode at low vehicle speeds such as heavy traffic.

Touch Off or On.

**Auto Cooled Seats**

This setting automatically turns on and regulates the ventilated seats when the cabin temperature is warm. See *Heated and Ventilated Front Seats* ⇨ 39.

Touch Off or On.

**Auto Heated Seats**

When enabled, this feature will automatically activate the heated seats at the level required by the interior temperature. The auto heated seats can be turned off by using the heated seat buttons on the center stack. See *Heated and Ventilated Front Seats* ⇨ 39.

Touch Off or On.

**Auto Defog**

When set to On, the front defog will automatically react to temperature and humidity conditions that may cause fogging.

Touch Off or On.

**Auto Rear Defog**

If equipped, this feature will automatically turn on the rear defog.

Touch Off or On.

**Ionizer**

If equipped and on, this feature purifies the air in the interior of the vehicle. See *Climate Control Systems* ⇨ 178.

Touch Off or On.

**Collision/Detection Systems**

Touch and the following may display:

- Alert Type
- Forward Collision System
- Front Pedestrian Detection
- Adaptive Cruise Go Notifier
- Lane Change Alert
- Park Assist
- Rear Camera Park Assist Symbols
- Rear Cross Traffic Alert

**Alert Type**

This feature will set the type of alert received from the driver assistance systems to help avoid crashes, either Beeps or Safety Alert Seat vibration pulses.

Touch Beeps or Safety Alert Seat.

**Forward Collision System**

This setting can alert of a potential crash with a detected vehicle ahead and can apply brakes to help reduce a collision's severity.

Touch Off, Alert, or Alert and Brake.

**Front Pedestrian Detection**

This feature may help avoid or reduce the harm caused by front-end crashes with nearby pedestrians.

See *Front Pedestrian Braking (FPB) System* ⇨ 235.

Select Off, Alert, or Alert and Brake.

**Adaptive Cruise Go Notifier**

This feature will give a reminder that Adaptive Cruise Control provides when it has brought the vehicle to a complete stop behind another stopping vehicle, and then that vehicle drives on. See *Adaptive Cruise Control (Advanced)* ⇨ 214.


When your vehicle approaches another detected vehicle too rapidly, the red FCA display will flash on the windshield. Also, eight rapid high-pitched beeps will sound from the front, or both sides of the Safety Alert Seat will pulse five times. When this Collision Alert occurs, the brake system may prepare for driver braking to occur more rapidly which can cause a brief, mild deceleration. Continue to apply the brake pedal as needed.

**Tailgating Alert**



The vehicle ahead indicator will display amber when you are following a vehicle ahead much too closely.

**Selecting the Alert Timing**



The Collision Alert control is on the steering wheel. Press  to set the FCA timing to Far, Medium, or Near, or on some vehicles, Off. The first button press shows the current setting on the DIC. Additional button presses will change this setting. The chosen setting will remain until it is changed and will affect the timing of both the Collision Alert and the Tailgating Alert features. The timing of both alerts will vary based on vehicle speed. The faster the vehicle speed, the farther away the alert will occur. Consider traffic and weather conditions when selecting the alert timing. The range of selectable alert timings may not be appropriate for all drivers and driving conditions.

If your vehicle is equipped with Adaptive Cruise Control (ACC), changing the FCA timing setting automatically changes the following gap setting (Far, Medium, or Near).

**Following Distance Indicator**

The following distance to a moving vehicle ahead in your path is indicated in following time in seconds on the Driver Information Center (DIC). See *Driver Information Center (DIC)* ⇨ 103. The minimum following time is 0.5 seconds away.

**Unnecessary Alerts**

FCA may provide unnecessary alerts for turning vehicles, vehicles in other lanes, objects that are not vehicles, or shadows. These alerts are normal operation and the vehicle does not need service.

**Cleaning the System**

If the FCA system does not seem to operate properly, this may correct the issue:

- Clean the outside of the windshield in front of the rearview mirror.
- Clean the entire front of the vehicle.
- Clean the headlamps.

**Automatic Emergency Braking (AEB)**

If the vehicle has Forward Collision Alert (FCA), it also has AEB, which includes Intelligent Brake Assist (IBA). When the system detects a vehicle ahead in your path that is traveling in the same direction that you may be about to crash into, it can provide a boost to braking or automatically brake the vehicle. This can help avoid or lessen the severity of crashes when driving in a forward gear. Depending on the situation, the vehicle may automatically brake moderately or hard. This automatic emergency braking can only occur if a vehicle is detected. This is shown by the FCA vehicle ahead indicator being lit. See *Forward Collision Alert (FCA) System* ⇨ 231.

The system works when driving in a forward gear between 8 km/h (5 mph) and 80 km/h (50 mph), or on vehicles with Adaptive Cruise Control (ACC), above 4 km/h (2 mph). It can detect vehicles up to approximately 60 m (197 ft).

**⚠ Warning**

AEB is an emergency crash preparation feature and is not designed to avoid crashes. Do not rely on AEB to brake the vehicle. AEB will not brake outside of its operating speed range and only responds to detected vehicles.

AEB may not:

- Detect a vehicle ahead on winding or hilly roads.
- Detect all vehicles, especially vehicles with a trailer, tractors, muddy vehicles, etc.
- Detect a vehicle when weather limits visibility, such as in fog, rain, or snow.
- Detect a vehicle ahead if it is partially blocked by pedestrians or other objects.

Complete attention is always required while driving, and you should be ready to take action and apply the brakes and/or steer the vehicle to avoid crashes.

AEB may slow the vehicle to a complete stop to try to avoid a potential crash. If this happens, AEB may engage the Electric

Parking Brake (EPB) to hold the vehicle at a stop. Release the EPB or firmly press the accelerator pedal.

**⚠ Warning**

AEB may automatically brake the vehicle suddenly in situations where it is unexpected and undesired. It could respond to a turning vehicle ahead, guardrails, signs, and other non-moving objects. To override AEB, firmly press the accelerator pedal, if it is safe to do so.

**Intelligent Brake Assist (IBA)**

IBA may activate when the brake pedal is applied quickly by providing a boost to braking based on the speed of approach and distance to a vehicle ahead.

Minor brake pedal pulsations or pedal movement during this time is normal and the brake pedal should continue to be applied as needed. IBA will automatically disengage only when the brake pedal is released.

**⚠ Warning**

IBA may increase vehicle braking in situations when it may not be necessary. You could block the flow of traffic. If this occurs, take your foot off the brake pedal and then apply the brakes as needed.

AEB and IBA can be disabled through vehicle personalization. See “Collision/Detection Systems” under *Vehicle Personalization* ⇨ 109.

**⚠ Warning**


Using AEB or IBA while towing a trailer could cause you to lose control of the vehicle and crash. Turn the system to Alert or Off when towing a trailer.

A system unavailable message may display if:

- The front of the vehicle or windshield is not clean.
- Heavy rain or snow is interfering with object detection.
- There is a problem with the StabiliTrak/ Electronic Stability Control (ESC) system.

The AEB system does not need service.

**Front Pedestrian Braking (FPB) System**

If equipped, the FPB system may help avoid or reduce the harm caused by front-end crashes with nearby pedestrians when driving in a forward gear. FPB displays an amber indicator, , when a nearby pedestrian is detected ahead. When approaching a detected pedestrian too quickly, FPB provides a red flashing alert on the windshield and rapidly beeps or pulses the driver seat. FPB can provide a boost to braking or automatically brake the vehicle. This system includes Intelligent Brake Assist (IBA), and the Automatic Emergency Braking (AEB) system may also respond to pedestrians. See *Automatic Emergency Braking (AEB)* ⇨ 234.

The FPB system can detect and alert to pedestrians in a forward gear at speeds between 8 km/h (5 mph) and 80 km/h (50 mph). During daytime driving, the system detects pedestrians up to a distance of approximately 40 m (131 ft). During nighttime driving, system performance is very limited.

**⚠ Warning**

FPB does not provide an alert or automatically brake the vehicle, unless it detects a pedestrian. FPB may not detect pedestrians, including children:

- When the pedestrian is not directly ahead, fully visible, or standing upright, or when part of a group.
- Due to poor visibility, including nighttime conditions, fog, rain, or snow.
- If the FPB sensor is blocked by dirt, snow, or ice.
- If the headlamps or windshield are not cleaned or in proper condition.

Be ready to take action and apply the brakes. For more information, see *Defensive Driving* ⇨ 188. Keep the windshield, headlamps, and FPB sensor clean and in good repair.

FPB can be set to Off, Alert, or Alert and Brake through vehicle personalization. See “Collision/Detection Systems” under *Vehicle Personalization* ⇨ 109.

## APPENDIX C

### Run Log

Subject Vehicle: **2021 Buick Envision Preferred AWD**

Test Date: **5/11/2021**

Principal Other Vehicle: **SSV**

Run	Test Type	Valid Run?	FCW TTC (s)	Min. Distance (ft)	Speed Reduction (mph)	Peak Decel. (g)	CIB TTC (s)	Pass/Fail	Notes
1	Static Run								Zero SV front bumper to SSV rear bumper and collect data
2	<b>Stopped POV</b>	Y	2.78	2.50	24.9	0.99	0.71	Pass	
3		Y	2.75	4.98	25.1	1.03	0.78	Pass	
4		Y	2.75	1.54	25.0	1.05	0.73	Pass	
5		Y	2.73	3.23	25.1	1.03	0.80	Pass	
6		Y	2.76	5.14	24.9	1.02	0.79	Pass	
7		Y	2.74	3.85	25.0	1.06	0.75	Pass	
8		Y	2.71	3.37	24.9	1.06	0.74	Pass	
9	Static Run								
10	<b>Slower POV, 25 vs 10</b>	N							Throttle
11		Y	2.65	5.11	14.7	1.02	0.71	Pass	
12		Y	2.96	5.37	15.0	0.83	0.77	Pass	
13		Y	2.59	3.02	15.0	0.83	0.76	Pass	
14		Y	2.74	3.69	15.2	0.75	0.82	Pass	
15		Y	2.71	3.86	14.9	0.79	0.78	Pass	
16		Y	2.75	2.42	15.3	0.87	0.71	Pass	



Run	Test Type	Valid Run?	FCW TTC (s)	Min. Distance (ft)	Speed Reduction (mph)	Peak Decel. (g)	CIB TTC (s)	Pass/Fail	Notes
17	<b>Slower POV, 25 vs 10</b>	Y	2.93	5.54	14.9	0.92	0.75	Pass	
18	Static Run								Check zero data is within $\pm 0.167$ ft ( $\pm 0.05$ m)
19	<b>Slower POV, 45 vs 20</b>	Y	3.11	0.00	17.1	0.56	1.02	Pass	
20		Y	3.17	0.00	17.7	0.55	1.02	Pass	
21		N							Driver brakes
22		N							SV yaw
23		N							Throttle
24		Y	3.05	0.00	18.7	0.54	1.07	Pass	
25		Y	3.09	0.00	18.9	0.54	1.06	Pass	
26		Y	3.14	0.00	16.6	0.53	1.00	Pass	
27		Y	3.18	0.00	19.1	0.54	1.06	Pass	
28		Y	3.00	0.06	24.7	1.06	1.11	Pass	
29	Static run								Check zero data is within $\pm 0.167$ ft ( $\pm 0.05$ m)
30	<b>Decelerating POV, 35</b>	Y	2.32	0.40	26.5	1.07	1.14	Pass	
31		Y	2.21	0.60	24.8	1.03	1.14	Pass	
32		Y	2.26	1.11	26.1	1.02	1.25	Pass	
33		Y	2.13	0.00	22.1	1.00	1.12	Pass	
34		Y	2.03	0.47	23.9	1.02	1.09	Pass	
35		Y	2.22	1.25	28.1	1.06	1.22	Pass	

Run	Test Type	Valid Run?	FCW TTC (s)	Min. Distance (ft)	Speed Reduction (mph)	Peak Decel. (g)	CIB TTC (s)	Pass/Fail	Notes
36	<b>Decelerating POV, 35</b>	Y	2.10	1.33	25.5	1.03	1.04	Pass	
37	Static Run								Check zero data is within $\pm 0.167$ ft ( $\pm 0.05$ m)
38	STP - Static Run								Zero SV front bumper to rear edge of steel plate and collect data
39	<b>STP False Positive, 25</b>	Y				0.02		Pass	
40		Y				0.02		Pass	
41		Y				0.03		Pass	
42		Y				0.01		Pass	
43		Y				0.01		Pass	
44		Y				0.02		Pass	
45		Y				0.01		Pass	
46	STP - Static Run								Check zero data is within $\pm 0.167$ ft ( $\pm 0.05$ m)
47	<b>STP False Positive, 45</b>	Y				0.01		Pass	
48		Y				0.00		Pass	
49		Y				0.01		Pass	
50		Y				0.01		Pass	
51		Y				0.01		Pass	
52		Y				0.01		Pass	
53		Y				0.02		Pass	

Run	Test Type	Valid Run?	FCW TTC (s)	Min. Distance (ft)	Speed Reduction (mph)	Peak Decel. (g)	CIB TTC (s)	Pass/Fail	Notes
54	STP - Static Run								Check zero data is within $\pm 0.167$ ft ( $\pm 0.05$ m)

## APPENDIX D

### Time History Plots

## LIST OF FIGURES

	Page
Figure D1. Example Time History for Stopped POV, Passing.....	D-9
Figure D2. Example Time History for Slower POV 25 vs. 10, Passing.....	D-10
Figure D3. Example Time History for Slower POV 45 vs. 20, Passing.....	D-11
Figure D4. Example Time History for Decelerating POV 35, Passing .....	D-12
Figure D5. Example Time History for False Positive STP 25, Passing .....	D-13
Figure D6. Example Time History for False Positive STP 45, Passing .....	D-14
Figure D7. Example Time History Displaying Invalid Headway Criteria .....	D-15
Figure D8. Example Time History Displaying Various Invalid Criteria .....	D-16
Figure D9. Example Time History for a Failed Run .....	D-17
Figure D10. Time History for CIB Run 2, SV Encounters Stopped POV .....	D-18
Figure D11. Time History for CIB Run 3, SV Encounters Stopped POV .....	D-19
Figure D12. Time History for CIB Run 4, SV Encounters Stopped POV .....	D-20
Figure D13. Time History for CIB Run 5, SV Encounters Stopped POV .....	D-21
Figure D14. Time History for CIB Run 6, SV Encounters Stopped POV .....	D-22
Figure D15. Time History for CIB Run 7, SV Encounters Stopped POV .....	D-23
Figure D16. Time History for CIB Run 8, SV Encounters Stopped POV .....	D-24
Figure D17. Time History for CIB Run 11, SV Encounters Slower POV, SV 25 mph, POV 10 mph .....	D-25
Figure D18. Time History for CIB Run 12, SV Encounters Slower POV, SV 25 mph, POV 10 mph .....	D-26
Figure D19. Time History for CIB Run 13, SV Encounters Slower POV, SV 25 mph, POV 10 mph .....	D-27
Figure D20. Time History for CIB Run 14, SV Encounters Slower POV, SV 25 mph, POV 10 mph .....	D-28
Figure D21. Time History for CIB Run 15, SV Encounters Slower POV, SV 25 mph, POV 10 mph .....	D-29
Figure D22. Time History for CIB Run 16, SV Encounters Slower POV, SV 25 mph, POV 10 mph .....	D-30
Figure D23. Time History for CIB Run 17, SV Encounters Slower POV, SV 25 mph, POV 10 mph .....	D-31
Figure D24. Time History for CIB Run 19, SV Encounters Slower POV, SV 45 mph, POV 20 mph .....	D-32
Figure D25. Time History for CIB Run 20, SV Encounters Slower POV, SV 45 mph, POV 20 mph .....	D-33
Figure D26. Time History for CIB Run 24, SV Encounters Slower POV, SV 45 mph, POV 20 mph .....	D-34
Figure D27. Time History for CIB Run 25, SV Encounters Slower POV, SV 45 mph, POV 20 mph .....	D-35
Figure D28. Time History for CIB Run 26, SV Encounters Slower POV, SV 45 mph, POV 20 mph .....	D-36
Figure D29. Time History for CIB Run 27, SV Encounters Slower POV, SV 45 mph, POV 20 mph .....	D-37
Figure D30. Time History for CIB Run 28, SV Encounters Slower POV, SV 45 mph, POV 20 mph .....	D-38
Figure D31. Time History for CIB Run 30, SV Encounters Decelerating POV, SV 35 mph, POV 35 mph .....	D-39
Figure D32. Time History for CIB Run 31, SV Encounters Decelerating POV, SV 35 mph, POV 35 mph .....	D-40

Figure D33. Time History for CIB Run 32, SV Encounters Decelerating POV, SV 35 mph, POV 35 mph .....	D-41
Figure D34. Time History for CIB Run 33, SV Encounters Decelerating POV, SV 35 mph, POV 35 mph .....	D-42
Figure D35. Time History for CIB Run 34, SV Encounters Decelerating POV, SV 35 mph, POV 35 mph .....	D-43
Figure D36. Time History for CIB Run 35, SV Encounters Decelerating POV, SV 35 mph, POV 35 mph .....	D-44
Figure D37. Time History for CIB Run 36, SV Encounters Decelerating POV, SV 35 mph, POV 35 mph .....	D-45
Figure D38. Time History for CIB Run 39, SV Encounters Steel Trench Plate, SV 25 mph.....	D-46
Figure D39. Time History for CIB Run 40, SV Encounters Steel Trench Plate, SV 25 mph.....	D-47
Figure D40. Time History for CIB Run 41, SV Encounters Steel Trench Plate, SV 25 mph.....	D-48
Figure D41. Time History for CIB Run 42, SV Encounters Steel Trench Plate, SV 25 mph.....	D-49
Figure D42. Time History for CIB Run 43, SV Encounters Steel Trench Plate, SV 25 mph.....	D-50
Figure D43. Time History for CIB Run 44, SV Encounters Steel Trench Plate, SV 25 mph.....	D-51
Figure D44. Time History for CIB Run 45, SV Encounters Steel Trench Plate, SV 25 mph.....	D-52
Figure D45. Time History for CIB Run 47, SV Encounters Steel Trench Plate, SV 45 mph.....	D-53
Figure D46. Time History for CIB Run 48, SV Encounters Steel Trench Plate, SV 45 mph.....	D-54
Figure D47. Time History for CIB Run 49, SV Encounters Steel Trench Plate, SV 45 mph.....	D-55
Figure D48. Time History for CIB Run 50, SV Encounters Steel Trench Plate, SV 45 mph.....	D-56
Figure D49. Time History for CIB Run 51, SV Encounters Steel Trench Plate, SV 45 mph.....	D-57
Figure D50. Time History for CIB Run 52, SV Encounters Steel Trench Plate, SV 45 mph.....	D-58
Figure D51. Time History for CIB Run 53, SV Encounters Steel Trench Plate, SV 45 mph.....	D-59

## Description of Time History Plots

A set of time history plots is provided for each valid run in the test series. Each set of plots comprises time varying data from both the Subject Vehicle (SV) and the Principal Other Vehicle (POV), as well as pass/fail envelopes and thresholds. The following is a description of data types shown in the time history plots, as well as a description of the color codes indicating to which vehicle the data pertain.

### Time History Plot Description

Each time history plot consists of data relevant to the test type under consideration, and therefore the data channels plotted vary according to test type. The test types (shown in the plot titles) include:

- Stopped POV (SV at 25 mph)
- Slower POV, 25/10 (SV at 25 mph, POV at 10 mph)
- Slower POV, 45/20 (SV at 45 mph, POV at 20 mph)
- Decelerating POV 35 mph (Both vehicles at 35 mph with 13.8 m gap, POV brakes at 0.3 g)
- False Positive STP 25 mph (Steel trench plate run over at 25 mph)
- False Positive STP 45 mph (Steel trench plate run over at 45 mph)

Time history figures include the following sub-plots:

- FCW Warning – Displays the Forward Collision Warning alert (which can be auditory, visual, or haptic). Depending on the type of FCW alert or instrumentation used to measure the alert, this can be any combination of the following:
  - Filtered, rectified, and normalized sound signal. The vertical scale is 0 to 1.
  - Filtered, rectified, and normalized acceleration (i.e., haptic alert, such as steering wheel vibration). The vertical scale is 0 to 1.
  - Normalized light sensor signal. The vertical scale is 0 to 1.

As only the auditory or haptic alert is perceptible by the driver during a test run, the earliest of either of these alerts is used to define the onset of the FCW alert. A vertical black bar on the plot indicates the TTC (sec) at the first moment of the warning issued by the FCW system. The FCW TTC is displayed to the right of the subplot in green. For False Positive tests, when the FCW presents a warning “FCW” is shown in red at the right edge of the FCW plot.

- Headway (ft) – Longitudinal separation (gap) between the frontmost point of the Subject Vehicle and the rearmost point of the Strikeable Surrogate Vehicle (SSV) towed by the Principal Other Vehicle. The minimum headway during the run is displayed to the right of the subplot.
- SV/POV Speed (mph) – Speed of the Subject Vehicle and Principal Other Vehicle (if any). For CIB tests, the speed reduction experienced by the Subject Vehicle is displayed to the right of the subplot.
- Yaw Rate (deg/sec) – Yaw rate of the Subject Vehicle and Principal Other Vehicle (if any).
- Lateral Offset (ft) – Lateral offset within the lane of the Subject Vehicle to the center of the lane of travel. Note that for tests involving the Strikeable Surrogate Vehicle (SSV), the associated lateral restraint track is defined to be the center of the lane of travel. If testing is done with a different POV which does not have a lateral restraint track, lateral offset is defined to be the lateral offset between the SV and POV.
- Ax (g) – Longitudinal acceleration of the Subject Vehicle and Principal Other Vehicle (if any). For CIB tests, the TTC (sec) at the moment of first CIB activation is displayed to the right of the subplot in green. Also, the peak value of Ax for the SV is shown on the subplot.
- Accelerator Pedal Position (0-1) – Normalized position of the accelerator pedal.

## Envelopes and Thresholds

Some of the time history plot figures contain either green or yellow envelopes and/or black threshold lines. These envelopes and thresholds are used to programmatically and visually determine the validity of a given test run. Envelope and threshold exceedances are indicated with either red shading or red asterisks, and red text is placed to the right side of the plot indicating the type of exceedance. Such exceedances indicate either that the test was invalid or that the requirements of the test were not met (i.e., failure of the AEB system).

For plots with green envelopes, in order for the test to be valid, the time-varying data must not exceed the envelope boundaries at any time. Exceedances of a green envelope are indicated by red shading in the area between the measured time-varying data and the envelope boundaries.

For plots with yellow envelopes, in order for the test to be valid, the time-varying data must not exceed the envelope at the beginning (left edge of the boundary) and/or end (right edge), but may exceed the boundary during the time



between the left and right edges. Exceedances at the left or right extent of a yellow envelope are indicated by red asterisks.

For the headway plot, a dashed black threshold line indicating a relative headway of zero is displayed. If no impact occurs, a green circle is displayed at the moment of minimum distance. If impact occurs, a red asterisk is displayed at the moment of impact.

For the Ax plot, if the scenario is an AEB brake-to-stop scenario, a vertical dashed black line is displayed for all plots indicating the moment of first POV braking. The yellow envelope in this case is relevant to the POV braking only. The left edge of the envelope is at 1.5 seconds after the first POV braking. A solid black threshold line extends horizontally 0.5 seconds to the left of the envelope. This threshold line represents the time during which the Ax of the Principal Other Vehicle must first achieve 0.27 g (the upper edge of the envelope). A green circle or red asterisk is displayed at the moment the POV brake level achieves 0.27 g. A green circle indicates that the test was valid (the threshold was crossed during the appropriate interval) and a red asterisk indicates that the test was invalid (the threshold was crossed outside of the appropriate interval). Additionally, for the CIB tests, a dashed black threshold line indicating an Ax of -0.15 g is given to define the onset of CIB activation. When the Subject Vehicle's Ax crosses this threshold, the CIB TTC is calculated and displayed.

For the accelerator pedal position plot, a green envelope is given starting 500 ms after the onset of the FCW warning to ensure that the accelerator pedal was released at the correct time and remained off for the duration of the CIB event. For false positive runs a green dot, rather than a green envelope is displayed. The green dot indicates that at the end of the run the accelerator pedal had not been released. If the accelerator had been released a red asterisk would appear.

## Color Codes

Color codes have been adopted to easily identify which data correspond to which vehicle, as well as to indicate the types of envelopes and thresholds used in the plots.

Color codes can be broken into four categories:

1. Time-varying data
2. Validation envelopes and thresholds
3. Individual data points
4. Text

1. Time-varying data color codes:

- Blue = Subject Vehicle data
- Magenta = Principal Other Vehicle data
- Brown = Relative data between SV and POV (i.e., TTC, lateral offset and headway distance)

2. Validation envelope and threshold color codes:

- Green envelope = time varying data must be within the envelope at all times in order to be valid
- Yellow envelope = time varying data must be within limits at left and/or right ends
- Black threshold (Solid) = time varying data must cross this threshold in the time period shown in order to be valid
- Black threshold (Dashed) = for reference only – this can include warning level thresholds, TTC thresholds, and acceleration thresholds

3. Individual data point color codes:

- Green circle = passing or valid value at a given moment in time
- Red asterisk = failing or invalid value at a given moment in time

4. Text color codes:

- Green = passing or valid value
- Red = failing or invalid value

## Other Notations

- NG – Indicates that the value for that variable was outside of bounds and therefore “No Good”.
- No Wng – No warning was detected.
- POV – Indicates that the value for the Principal Other Vehicle was out of bounds.
- SV – Indicates that the value for the Subject Vehicle was out of bounds.
- SR – Shows the speed reduction value.
- Thr – Indicates that the requirements for the throttle were not met.

The minimum (worst) GPS fix type is displayed in the lower right corner of each page. The only valid fix type is RTK fixed (displayed in green). If the fix type during any portion of the test was anything other than RTK fixed, then “RTK Fixed OR LESS!!” is displayed in red.

Examples of time history plots for each test type (including passing, failing and invalid runs) are shown in Figure D1 through Figure D9. Figures D1 through D6 show passing runs for each of the 6 test types. Figures D7 and D8 show examples of invalid runs. Figure D9 shows an example of a valid test that failed the CIB requirements.

Time history data plots for the tests of the vehicle under consideration herein are provided beginning with Figure D10.

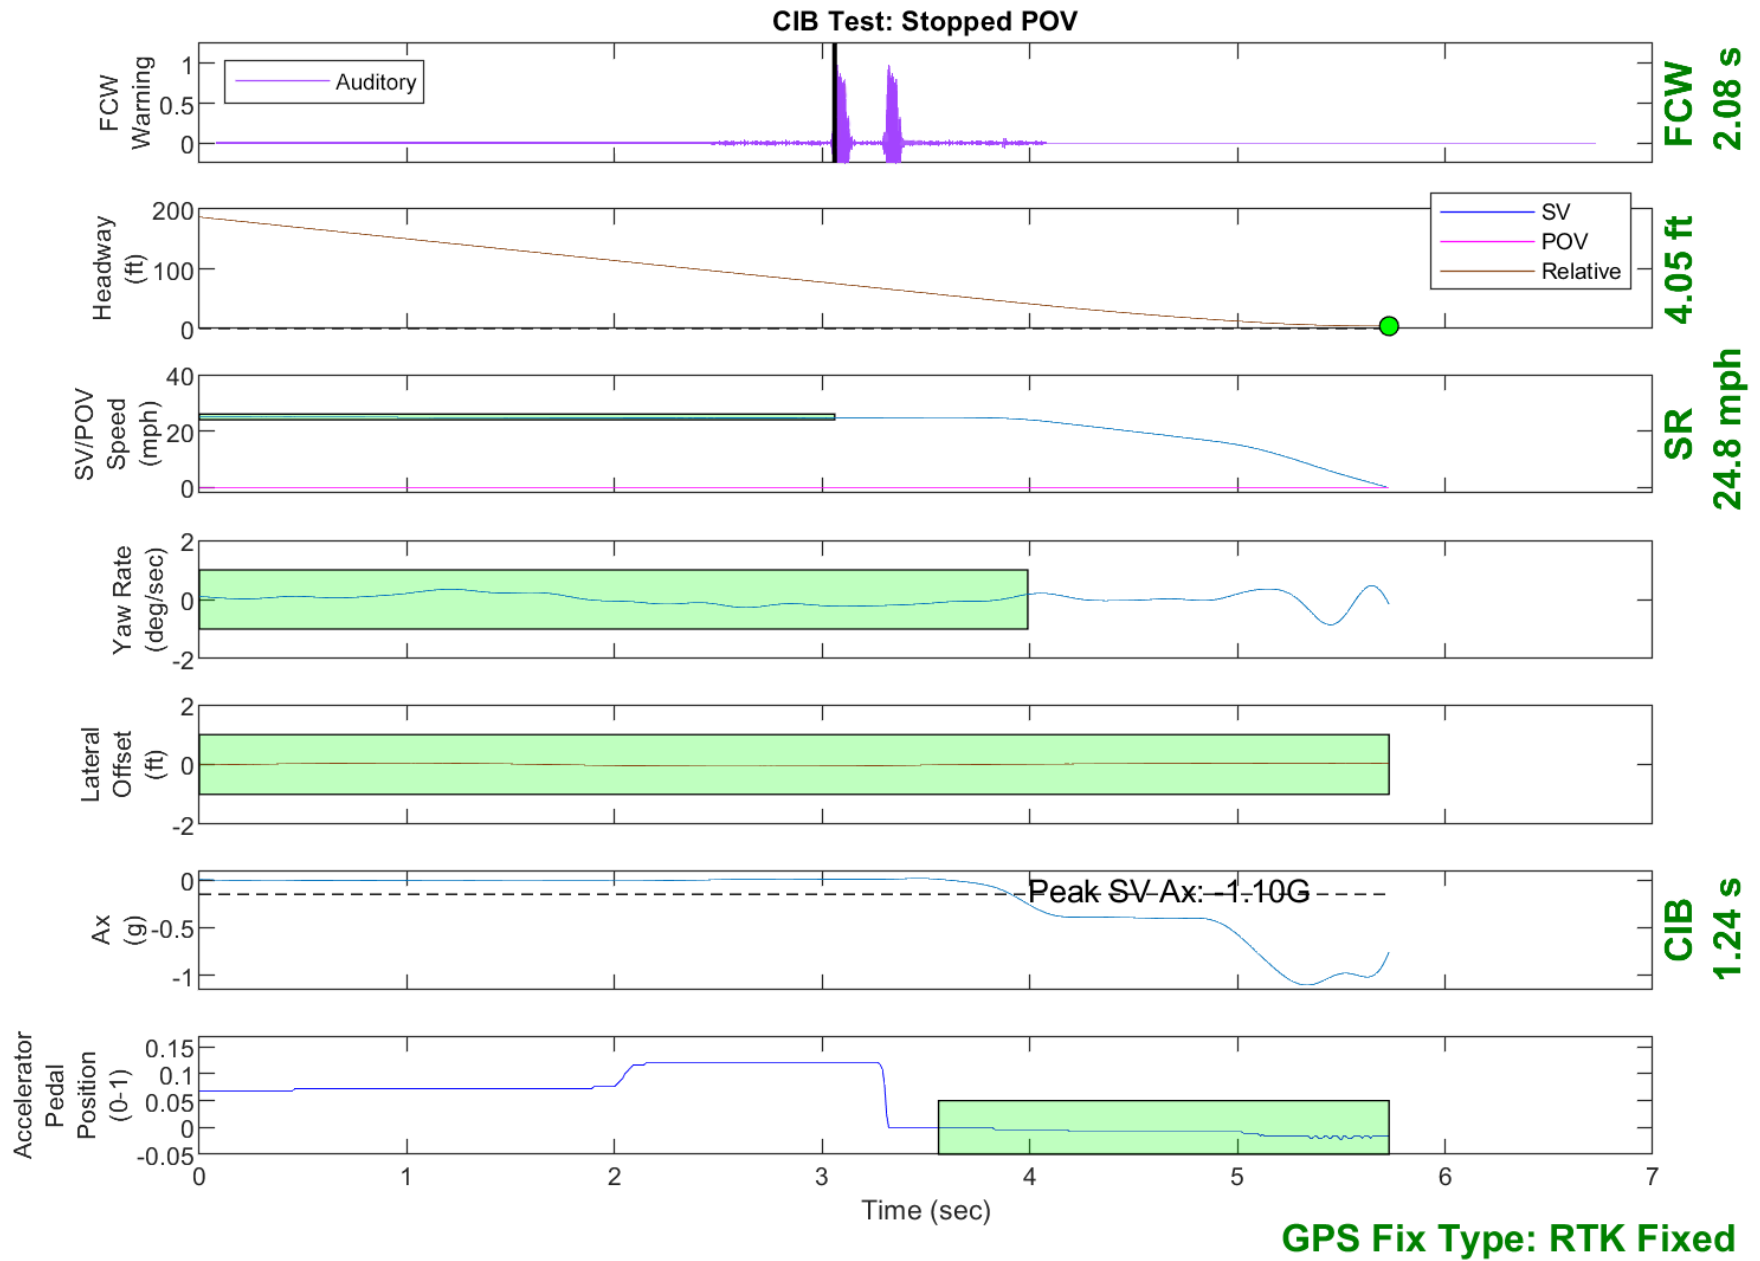


Figure D1. Example Time History for Stopped POV, Passing

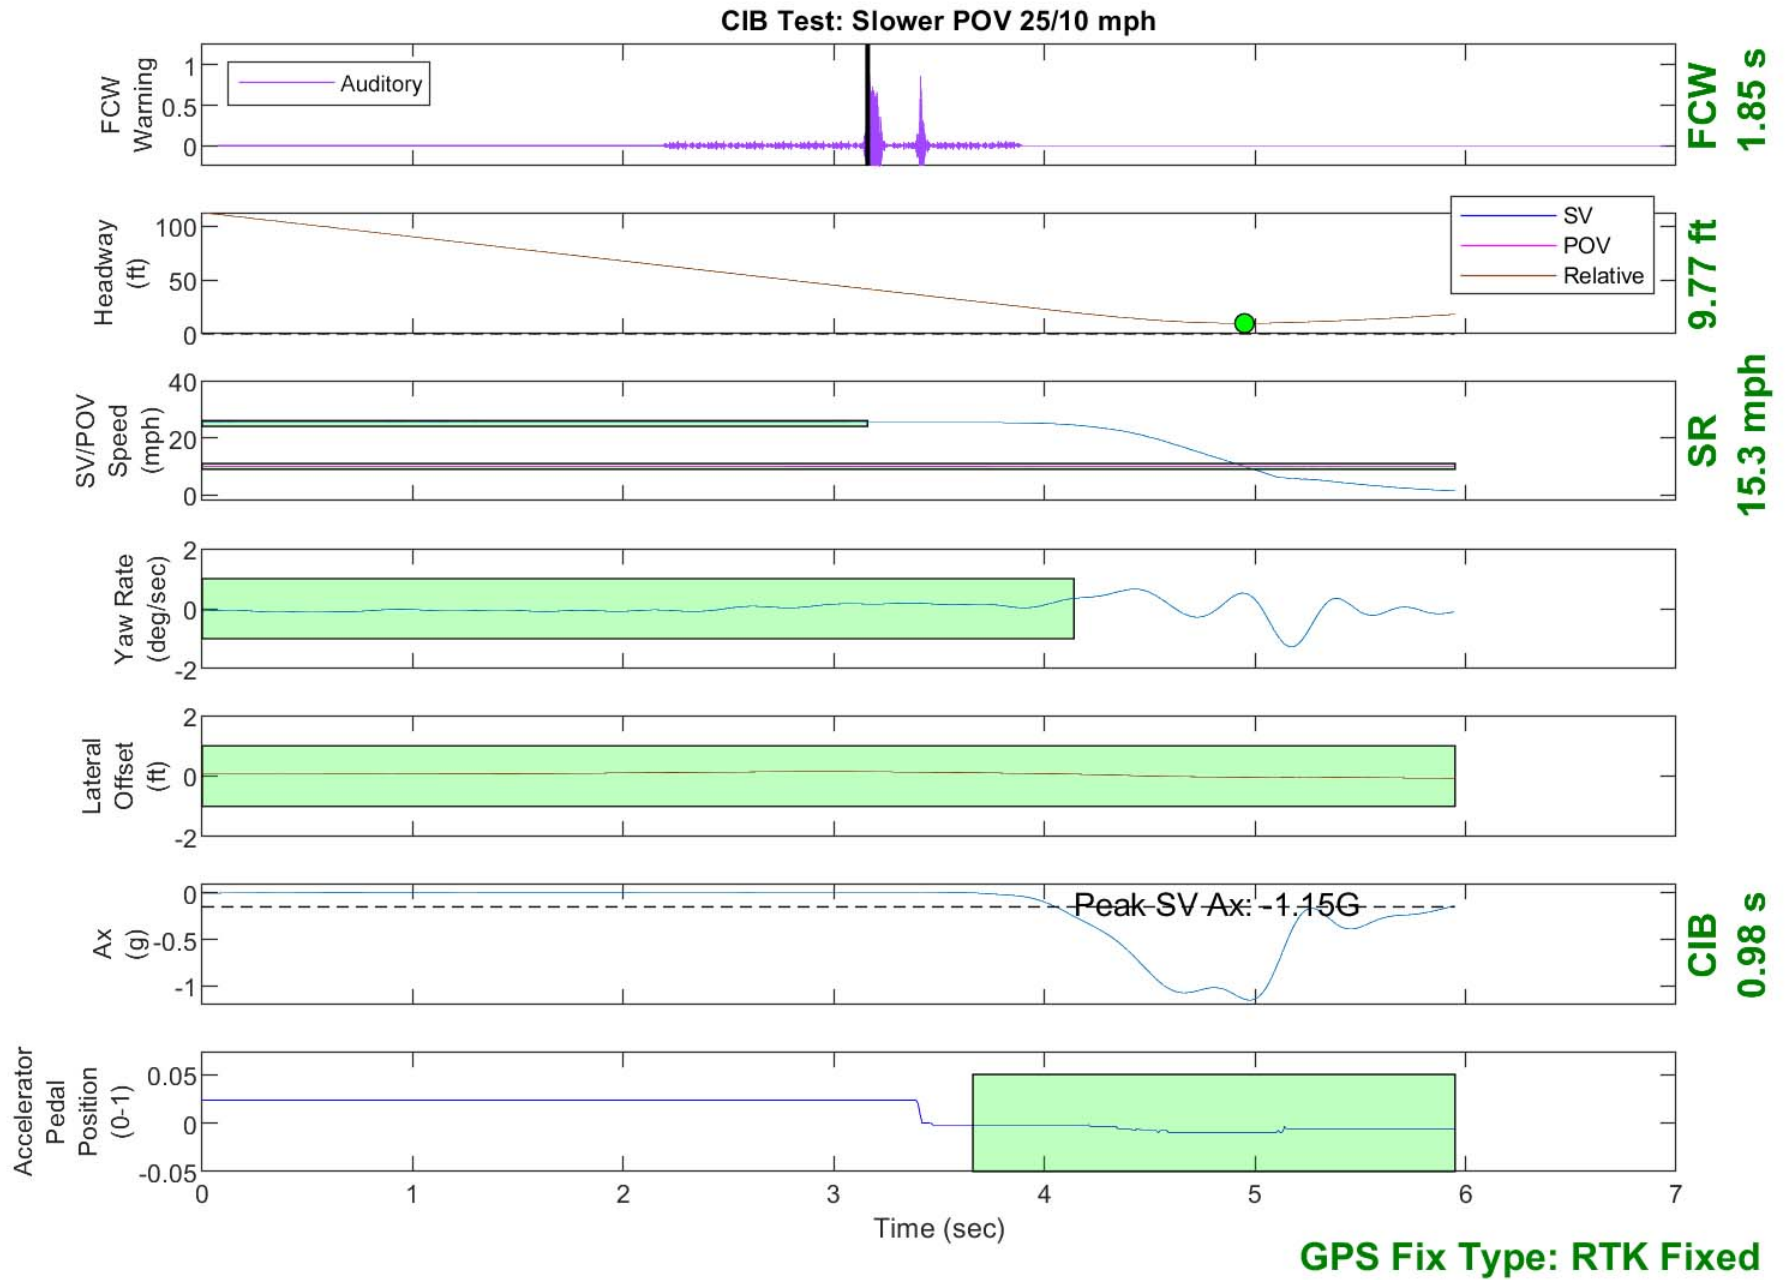


Figure D2. Example Time History for Slower POV 25 vs. 10, Passing

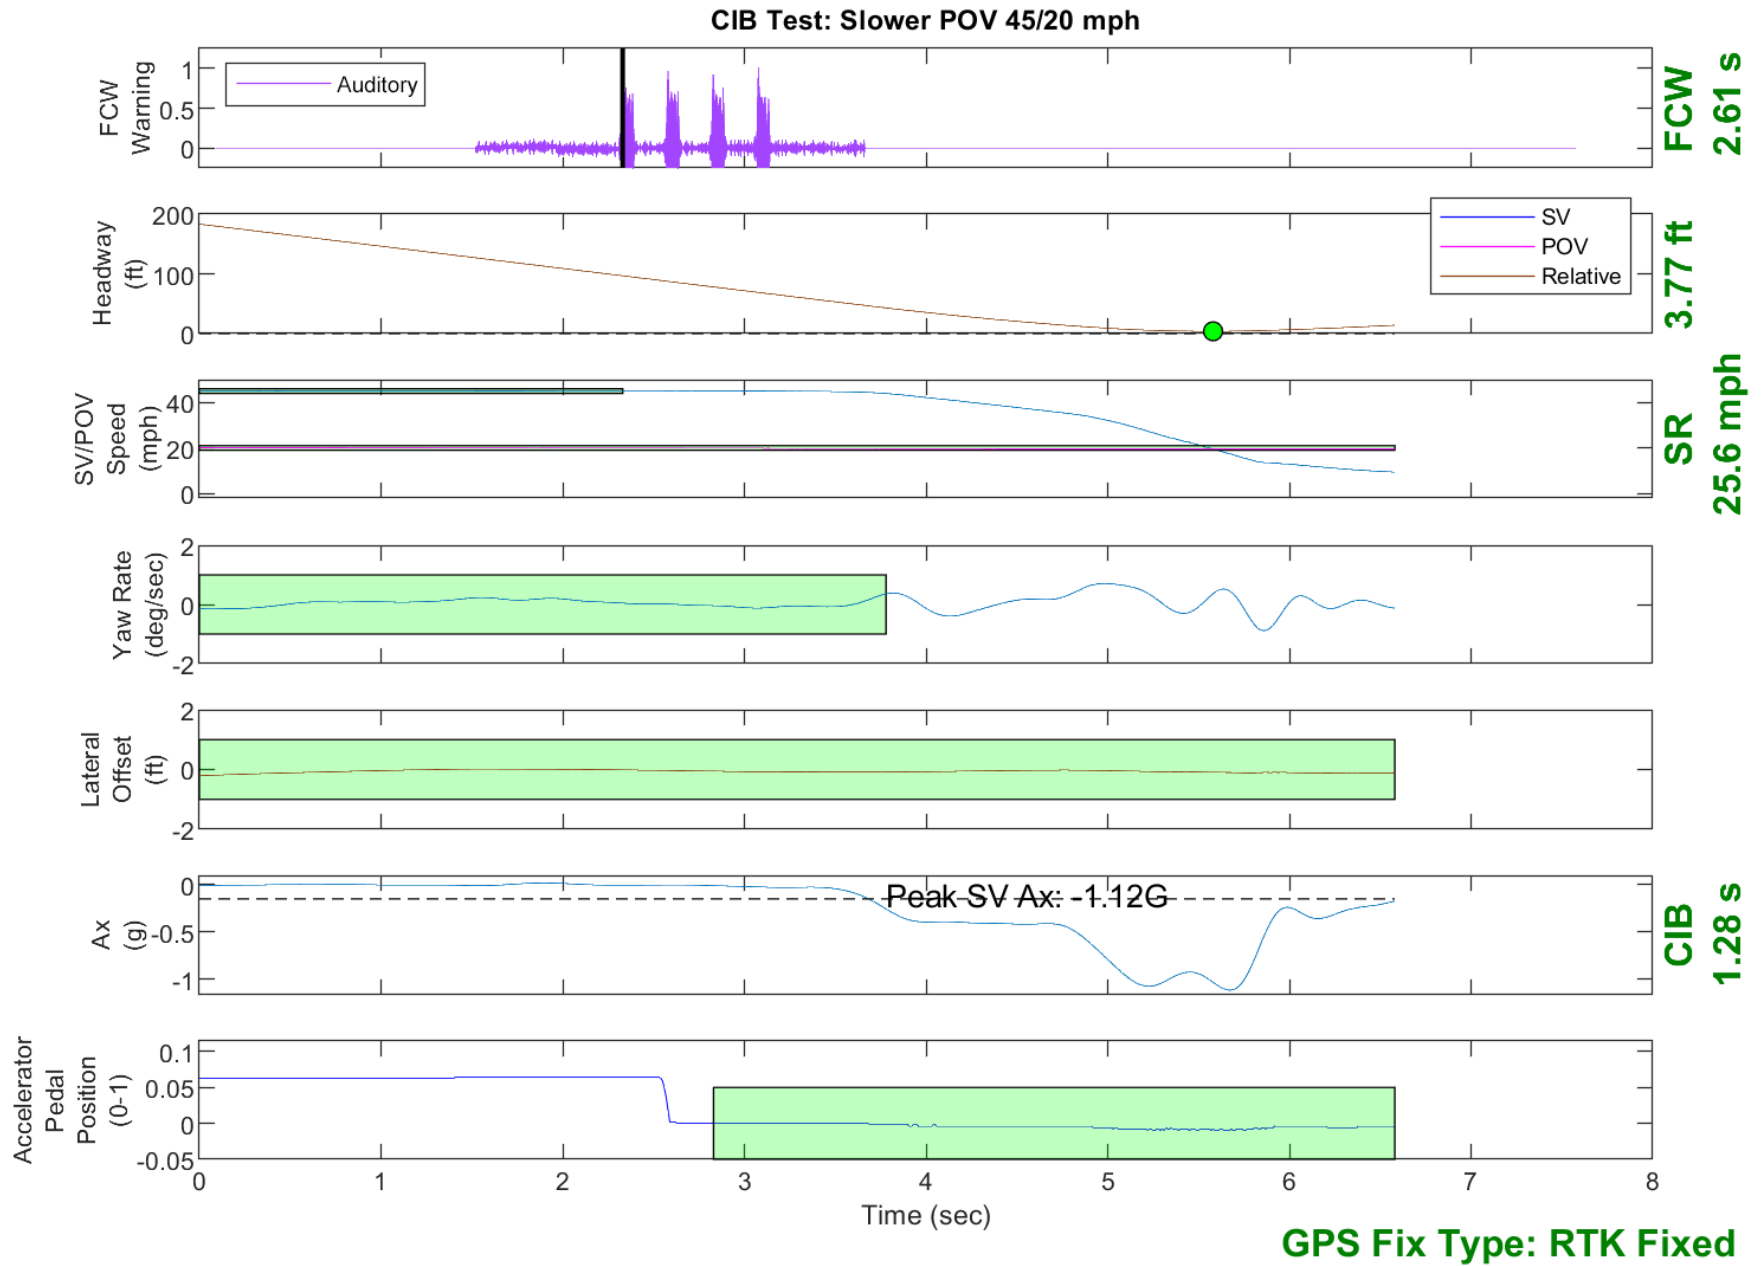


Figure D3. Example Time History for Slower POV 45 vs. 20, Passing

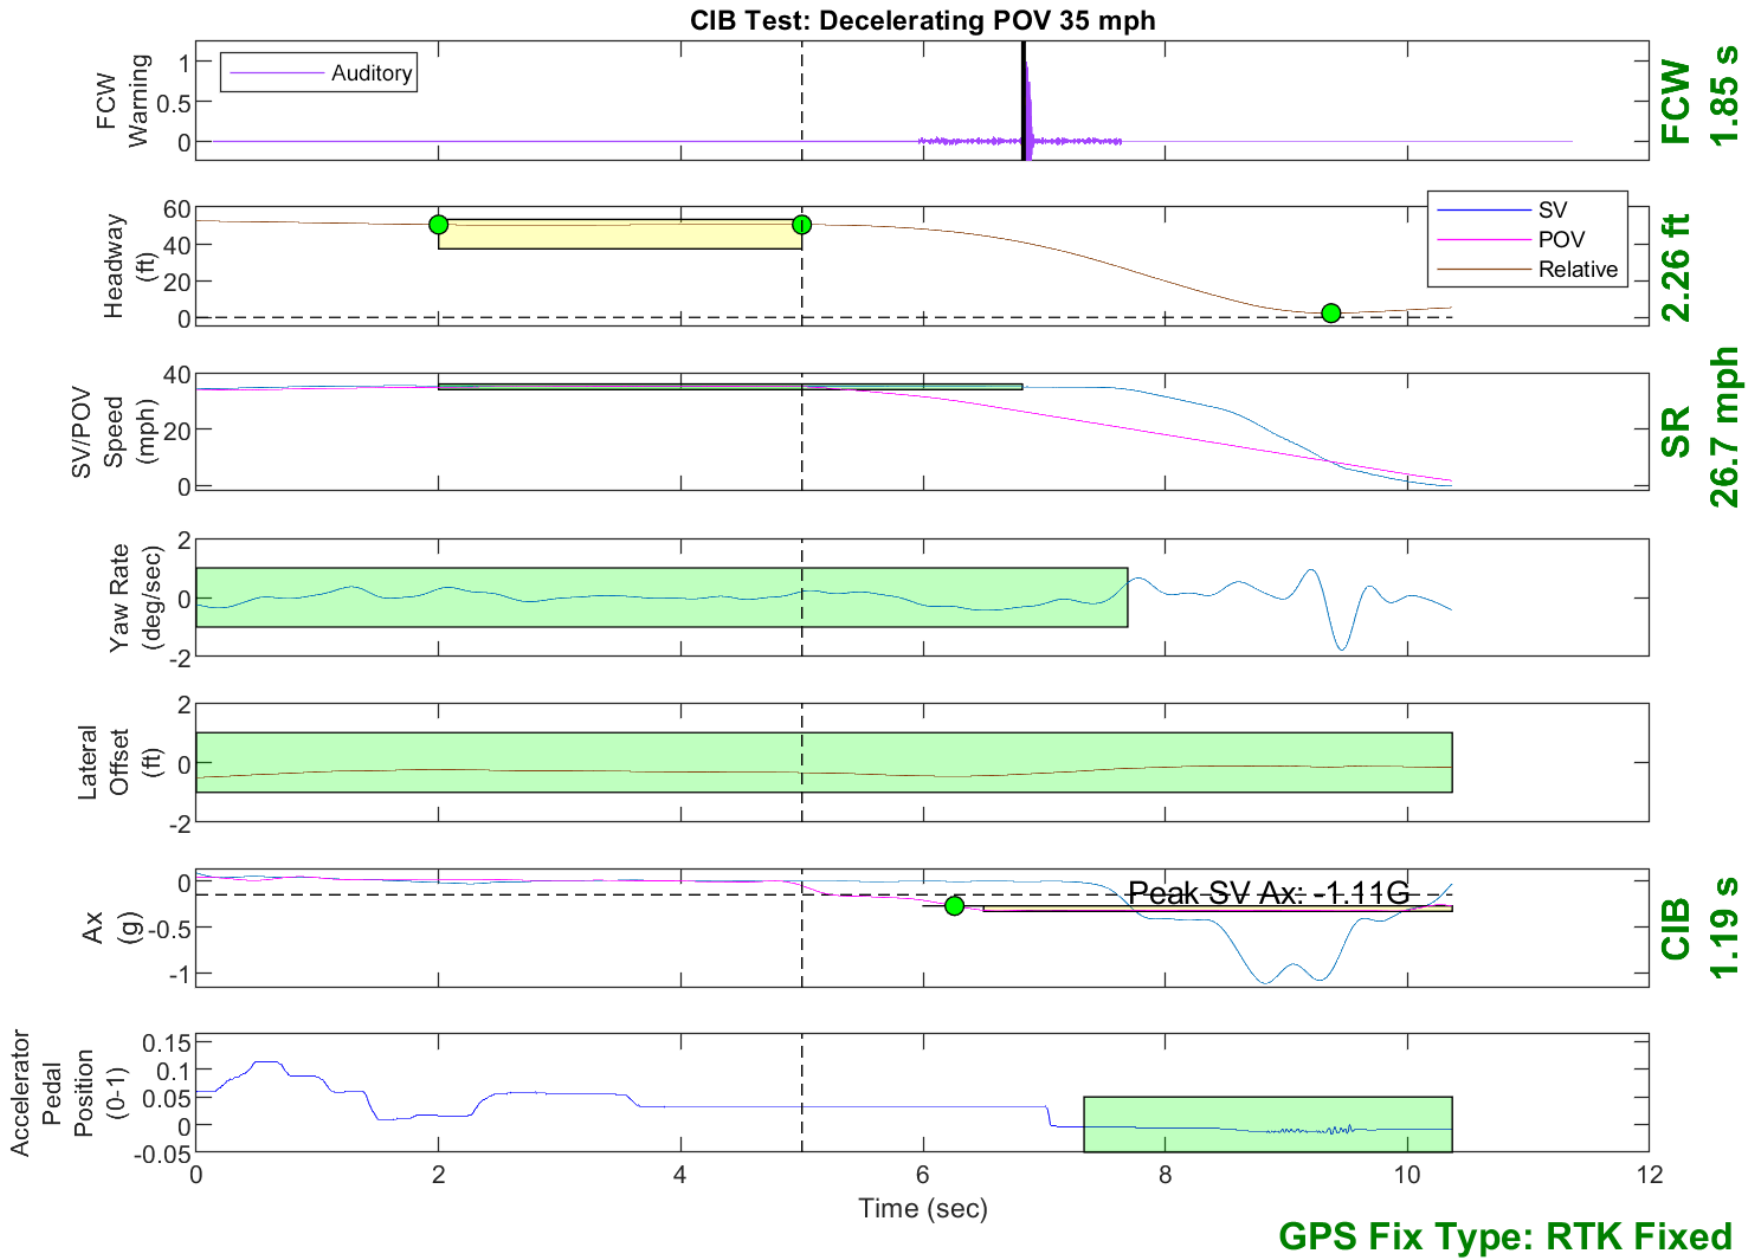


Figure D4. Example Time History for Decelerating POV 35, Passing

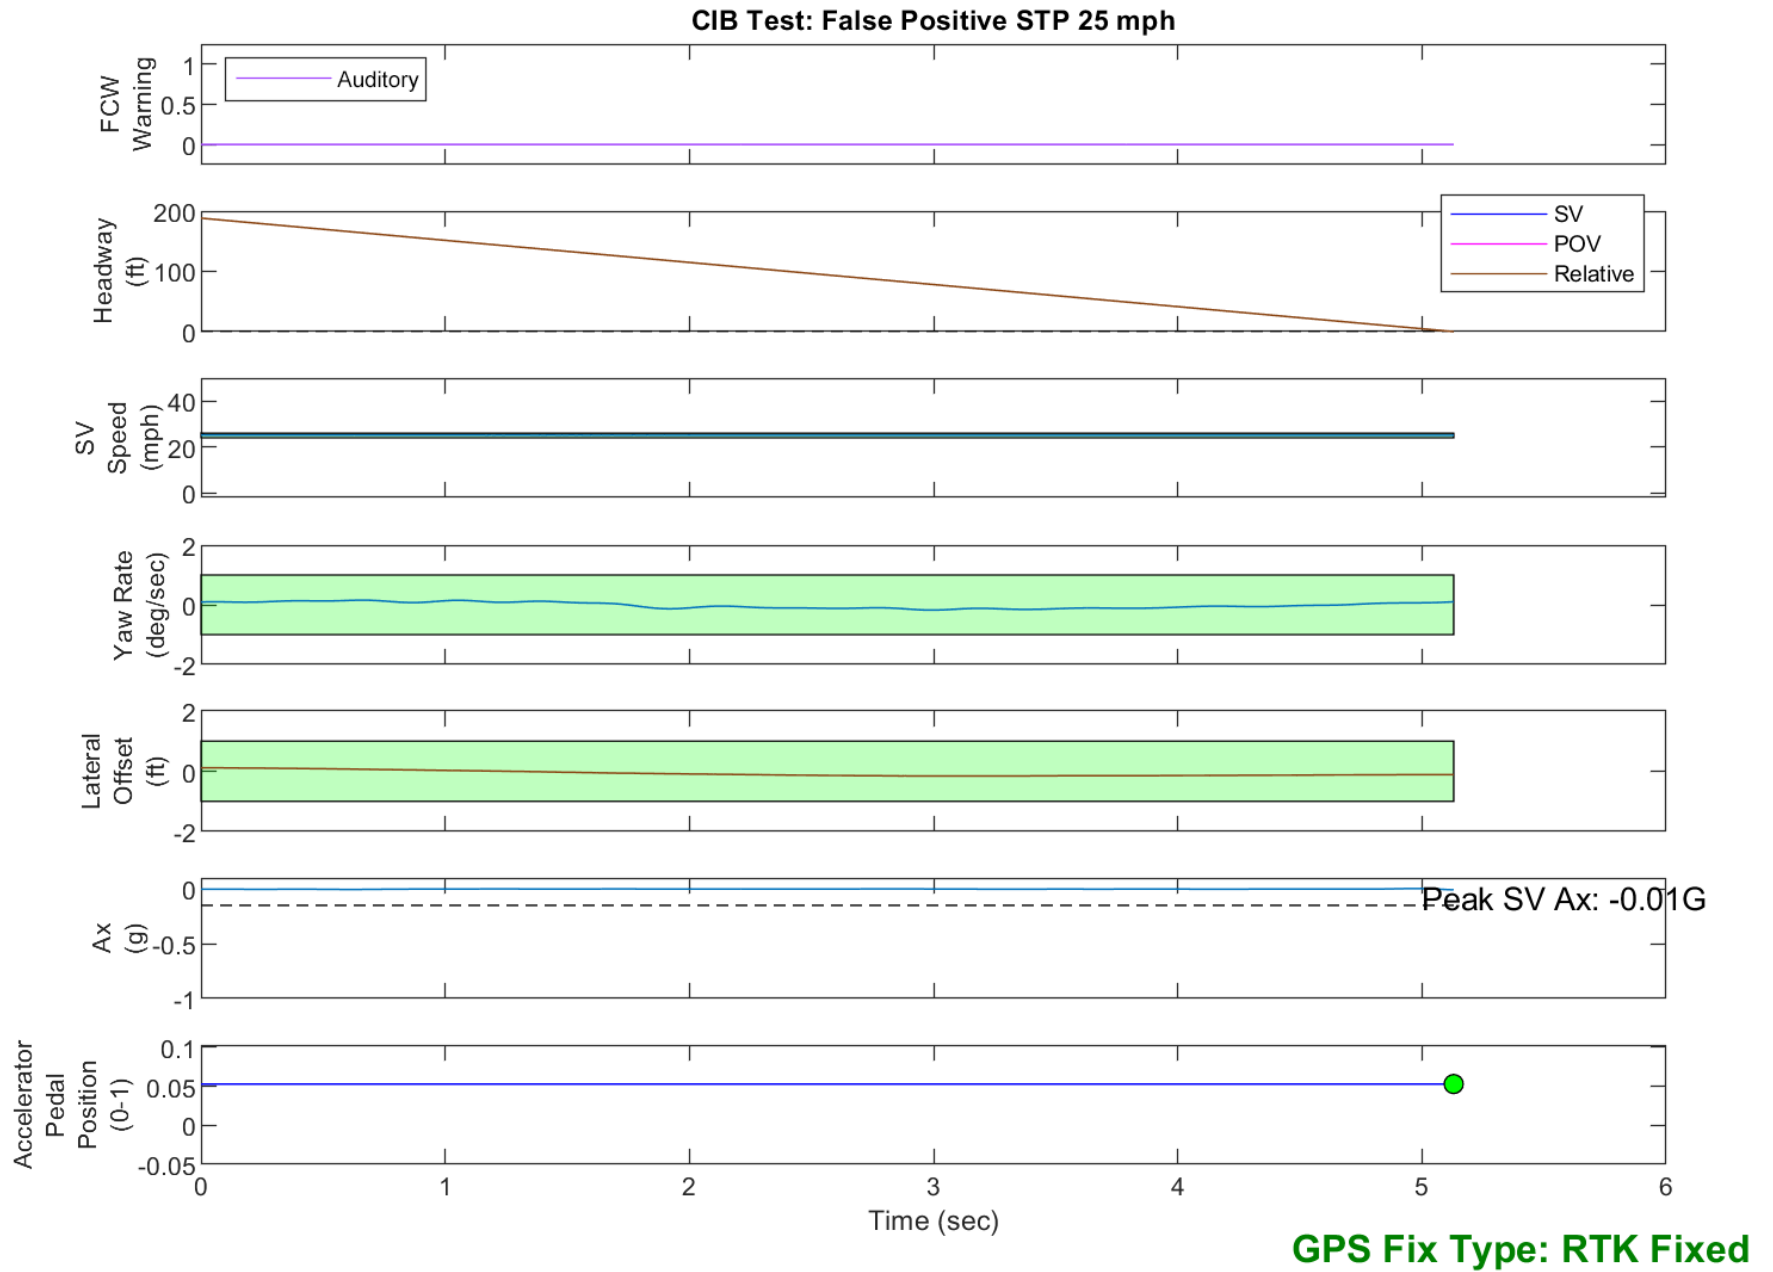


Figure D5. Example Time History for False Positive STP 25, Passing



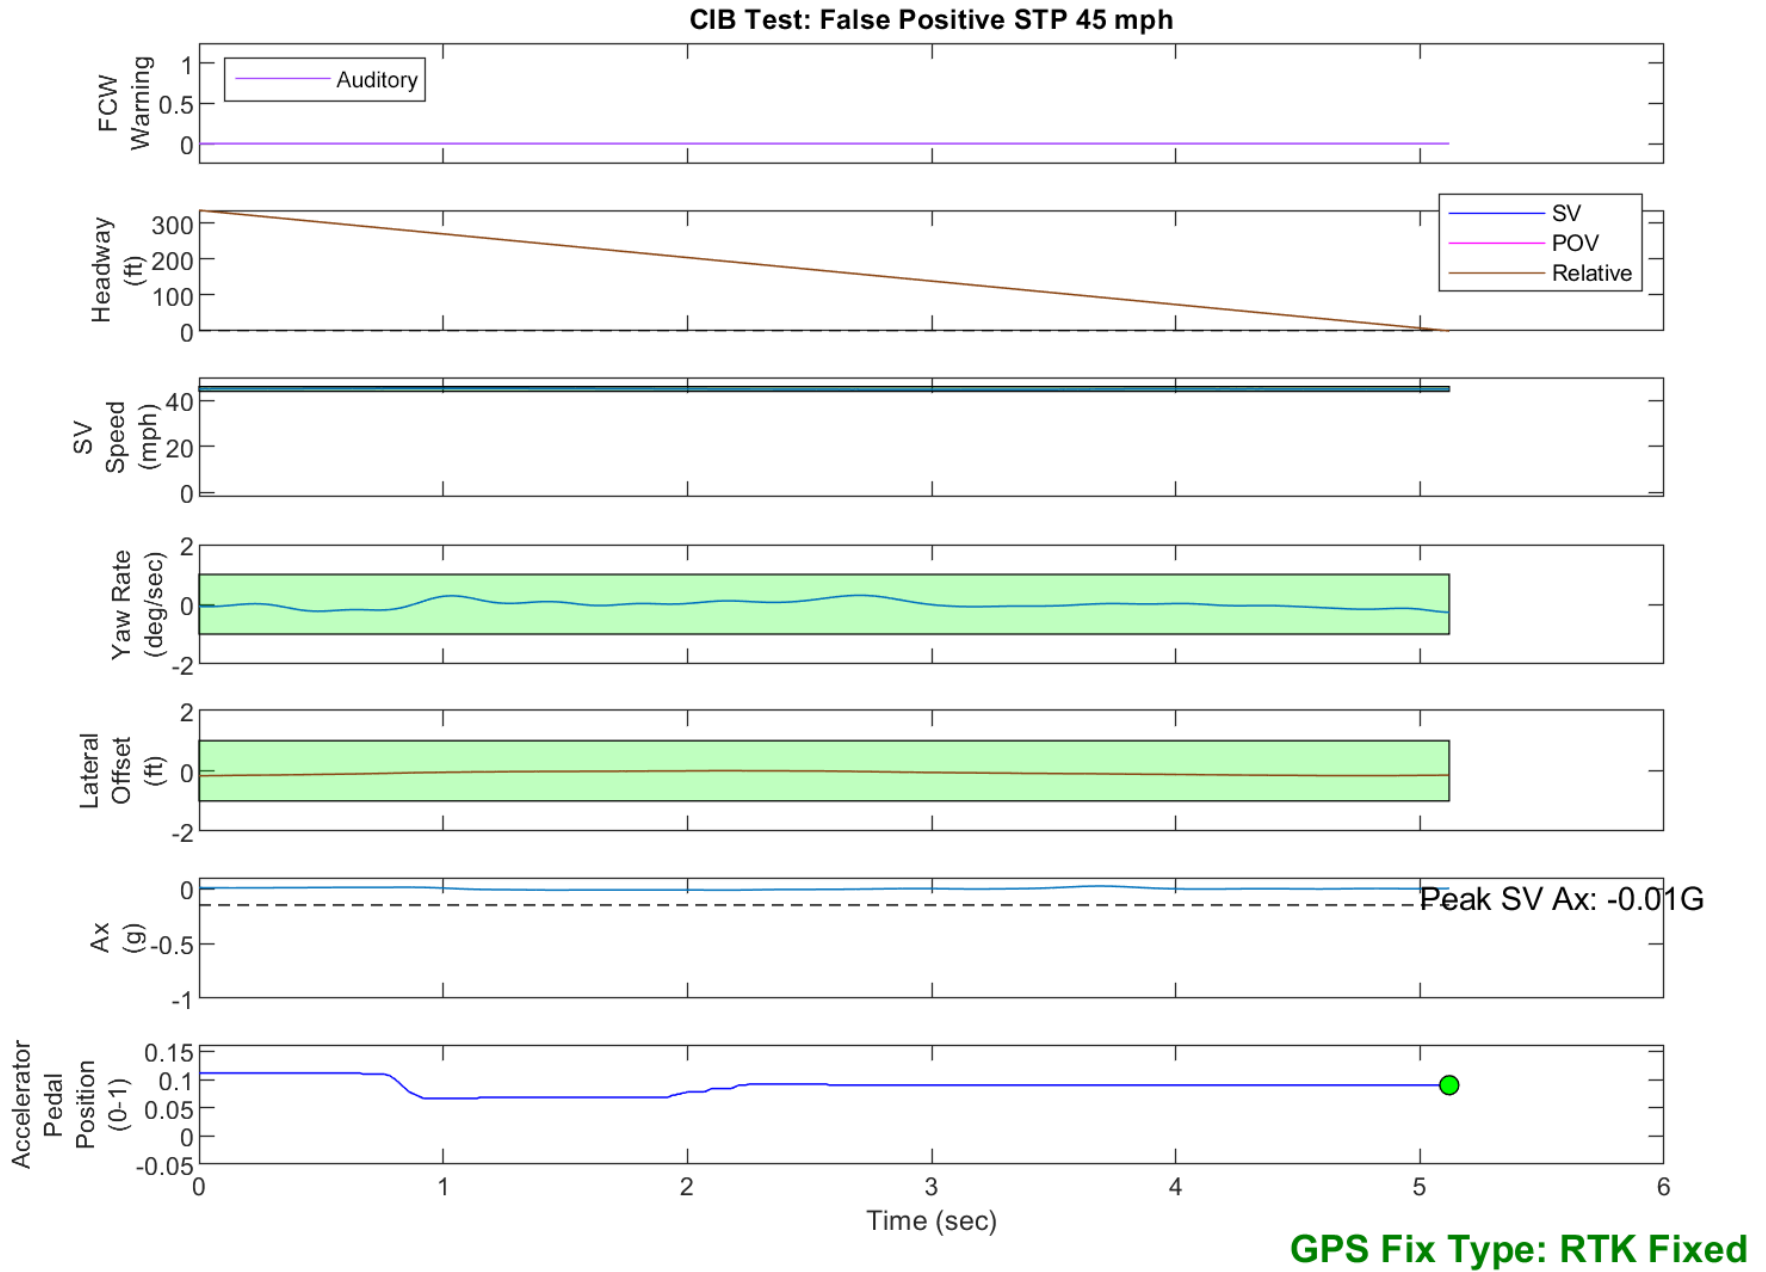


Figure D6. Example Time History for False Positive STP 45, Passing

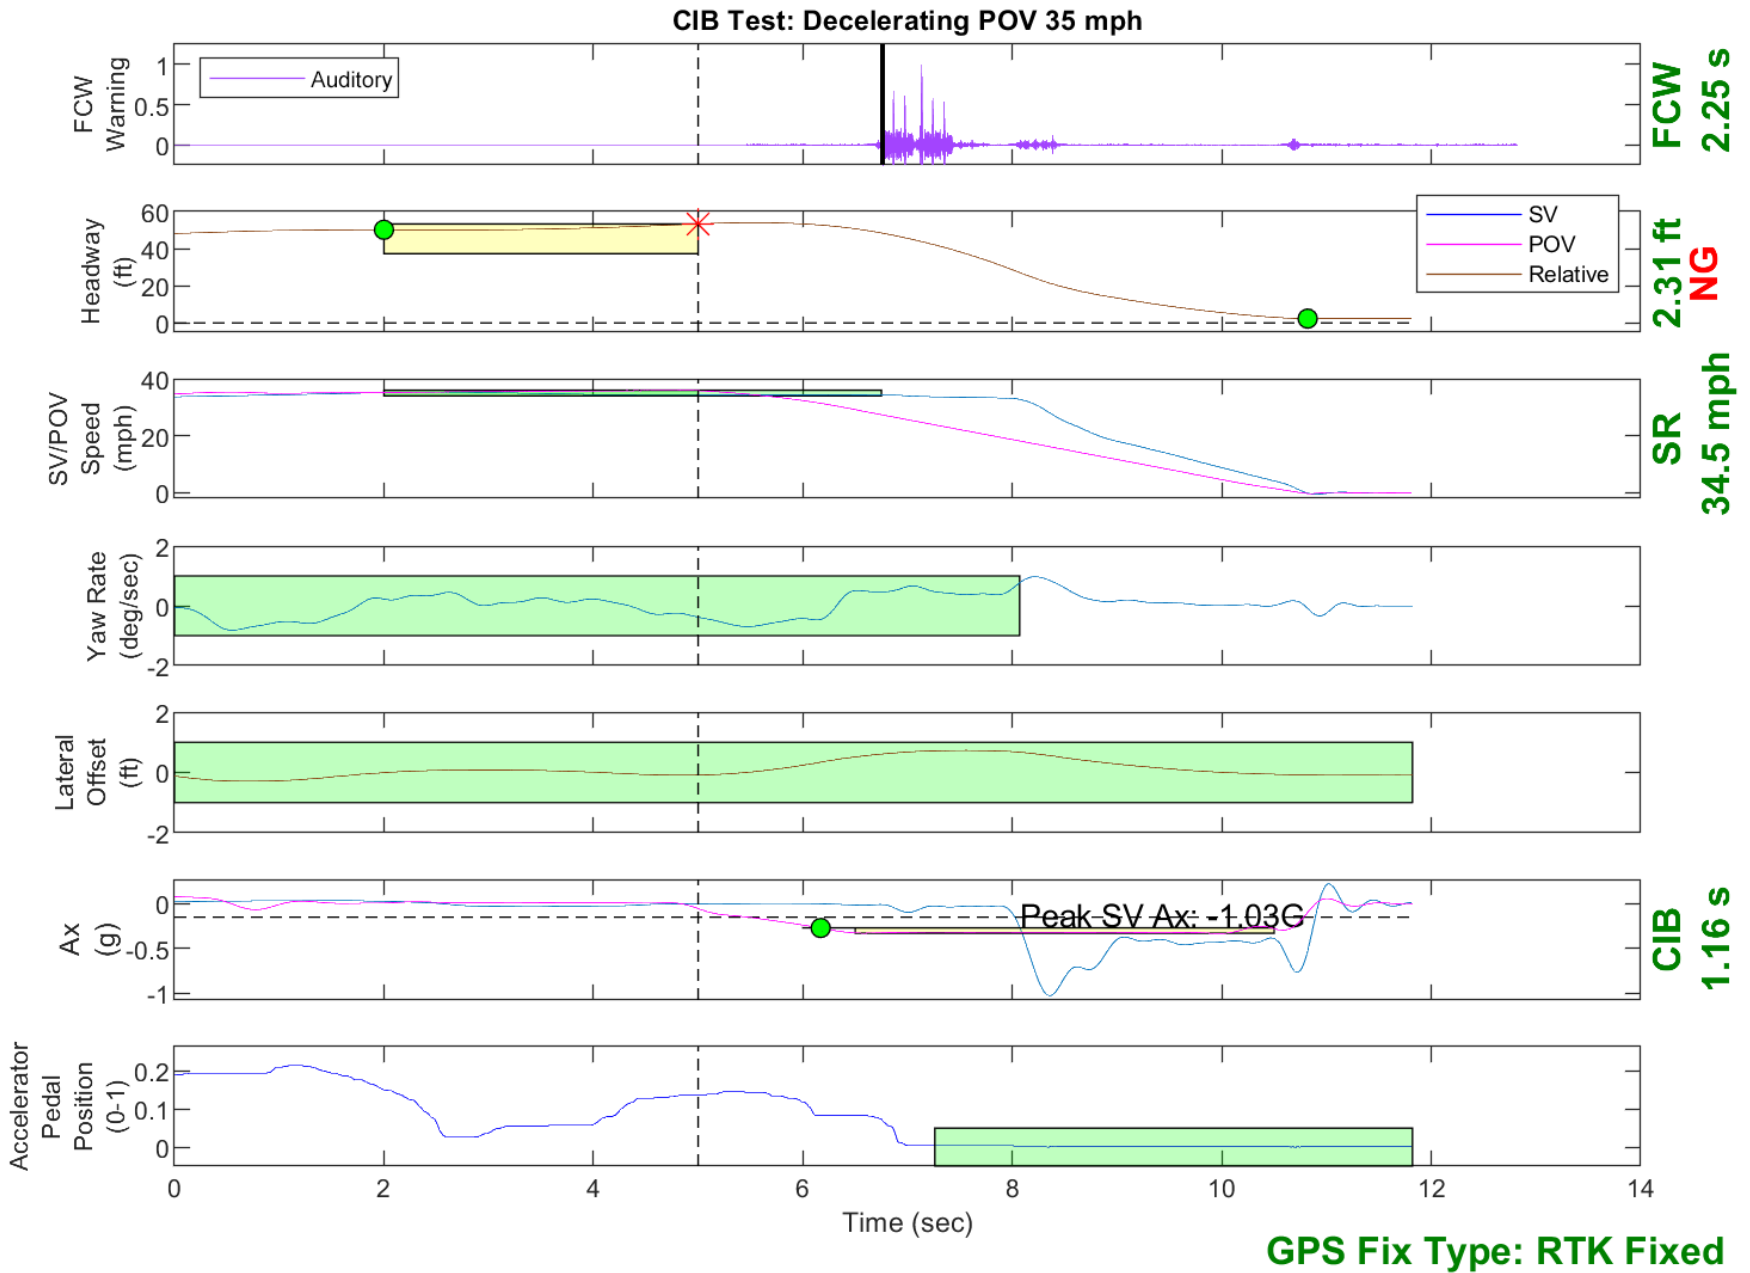


Figure D7. Example Time History Displaying Invalid Headway Criteria

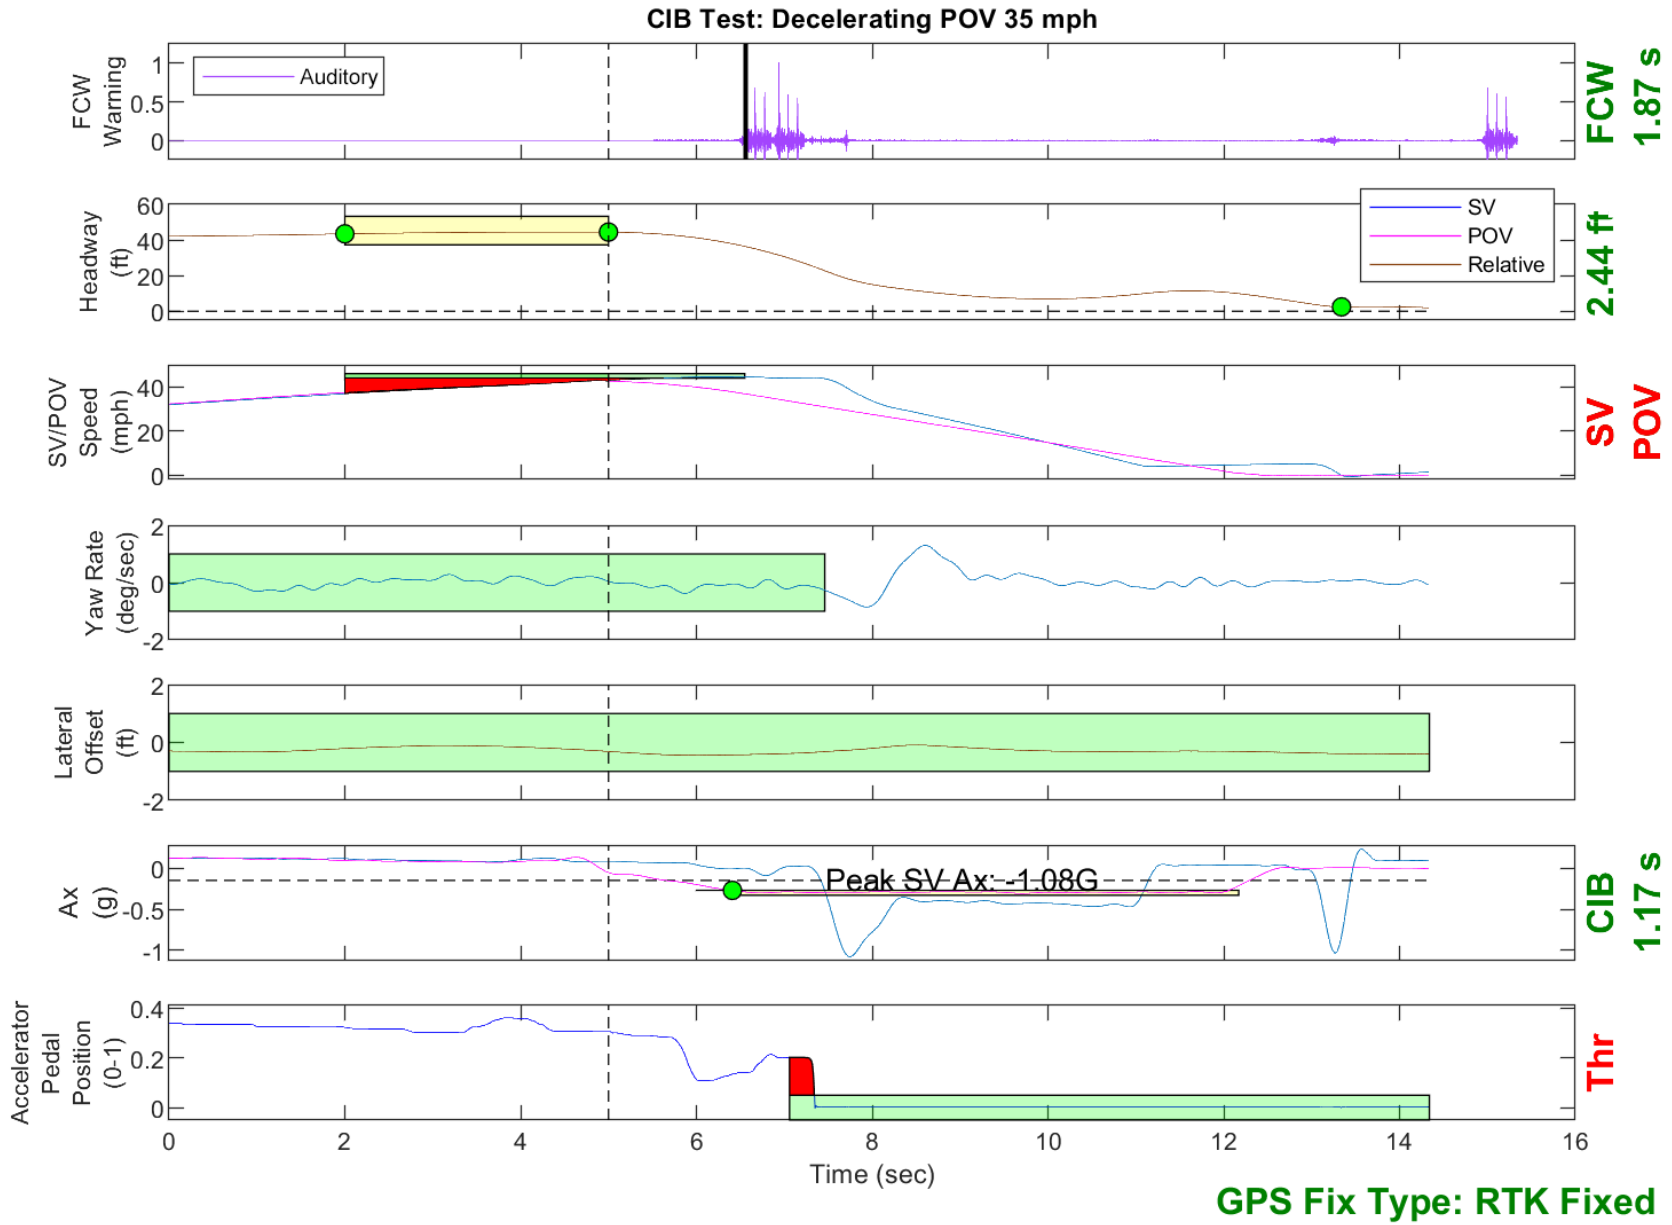


Figure D8. Example Time History Displaying Various Invalid Criteria

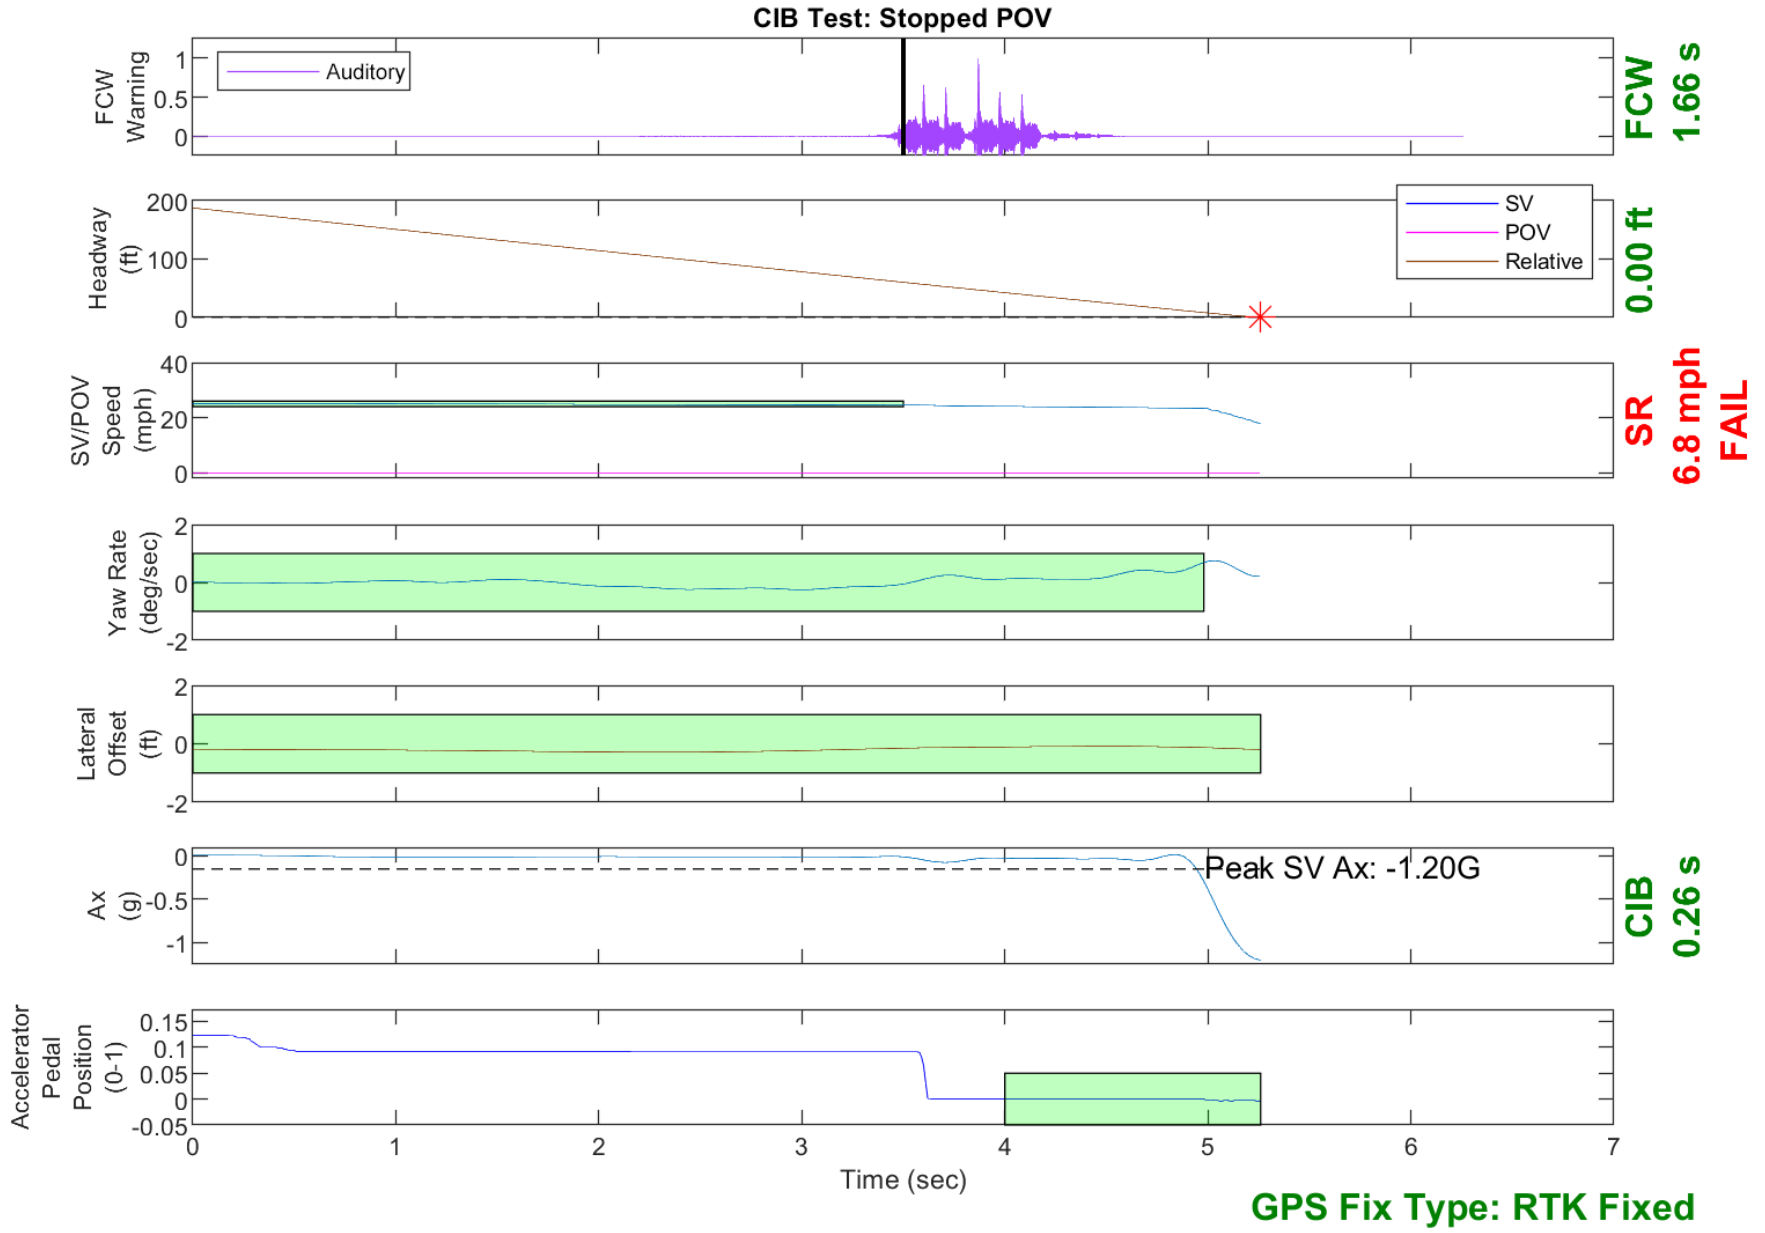


Figure D9. Example Time History for a Failed Run

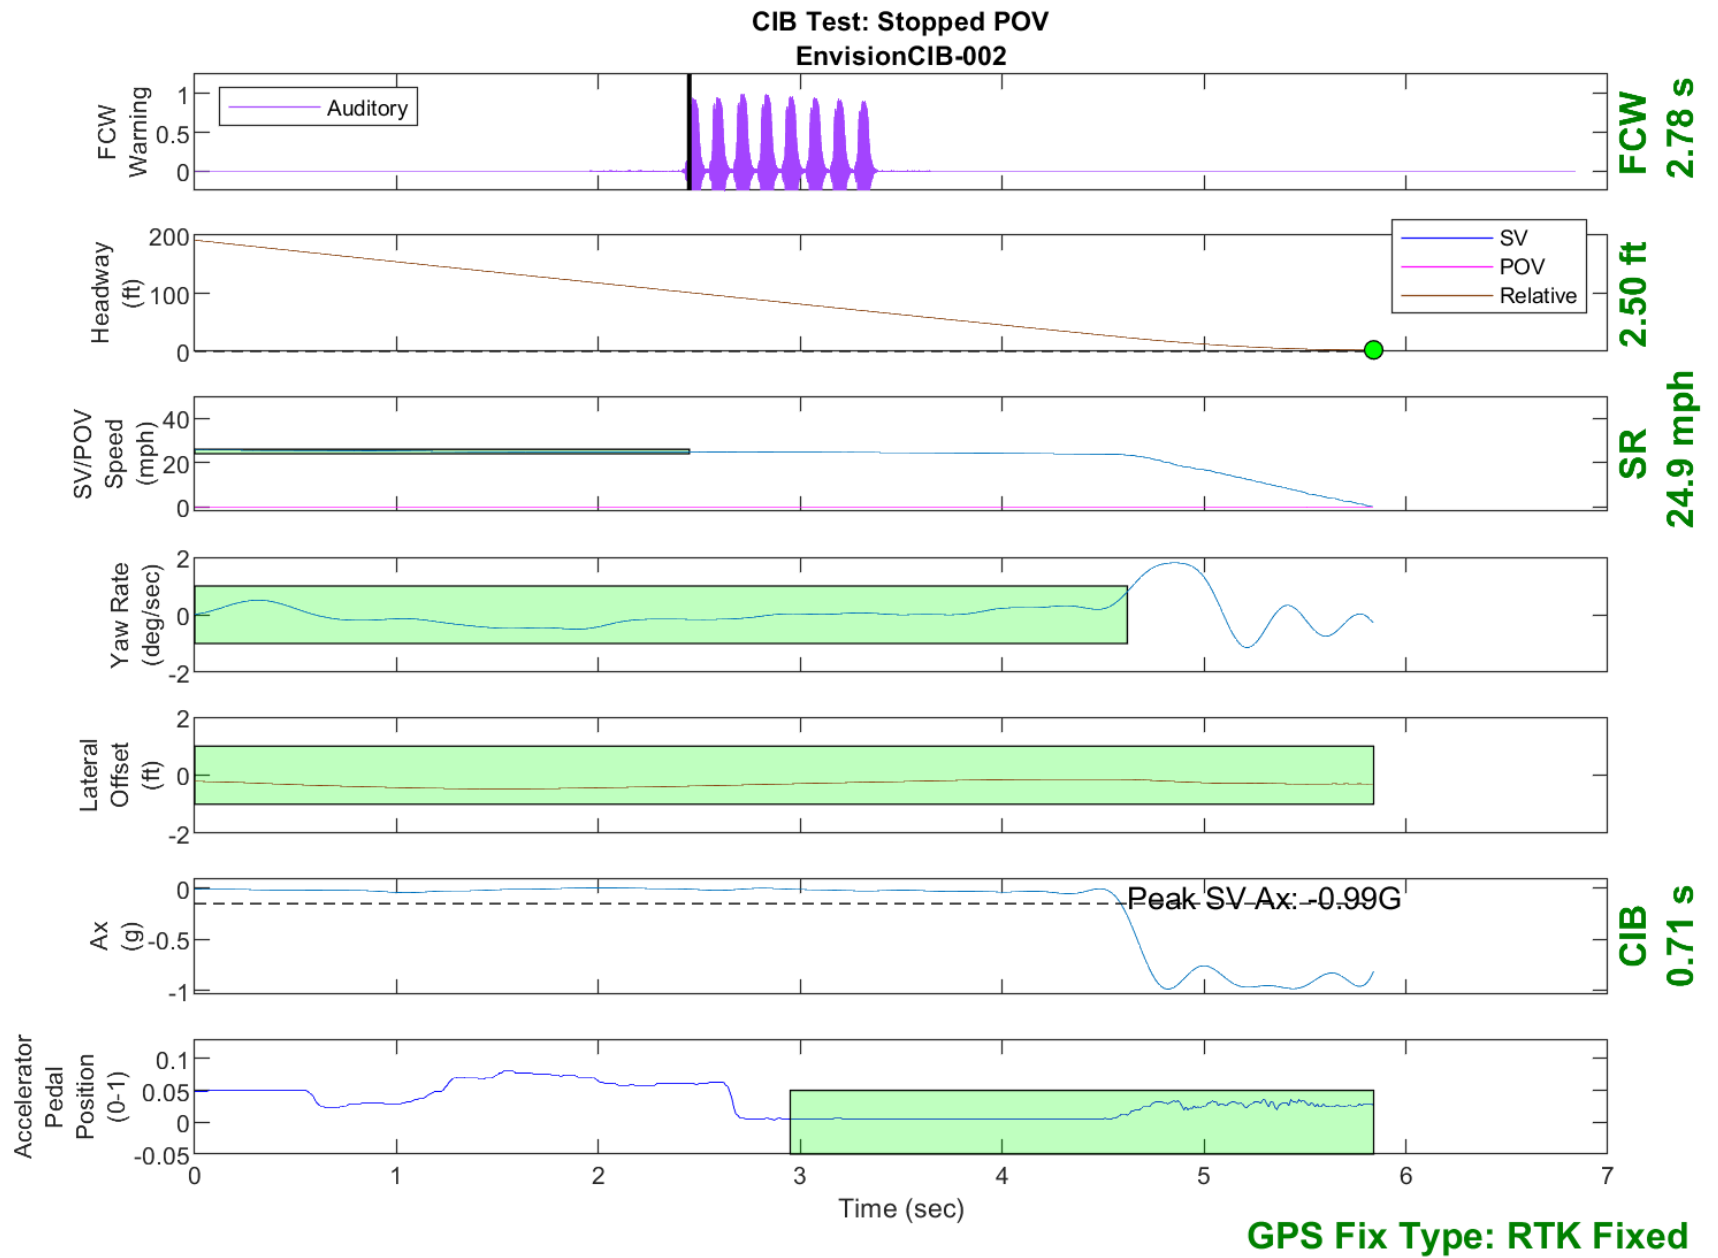


Figure D10. Time History for CIB Run 2, SV Encounters Stopped POV

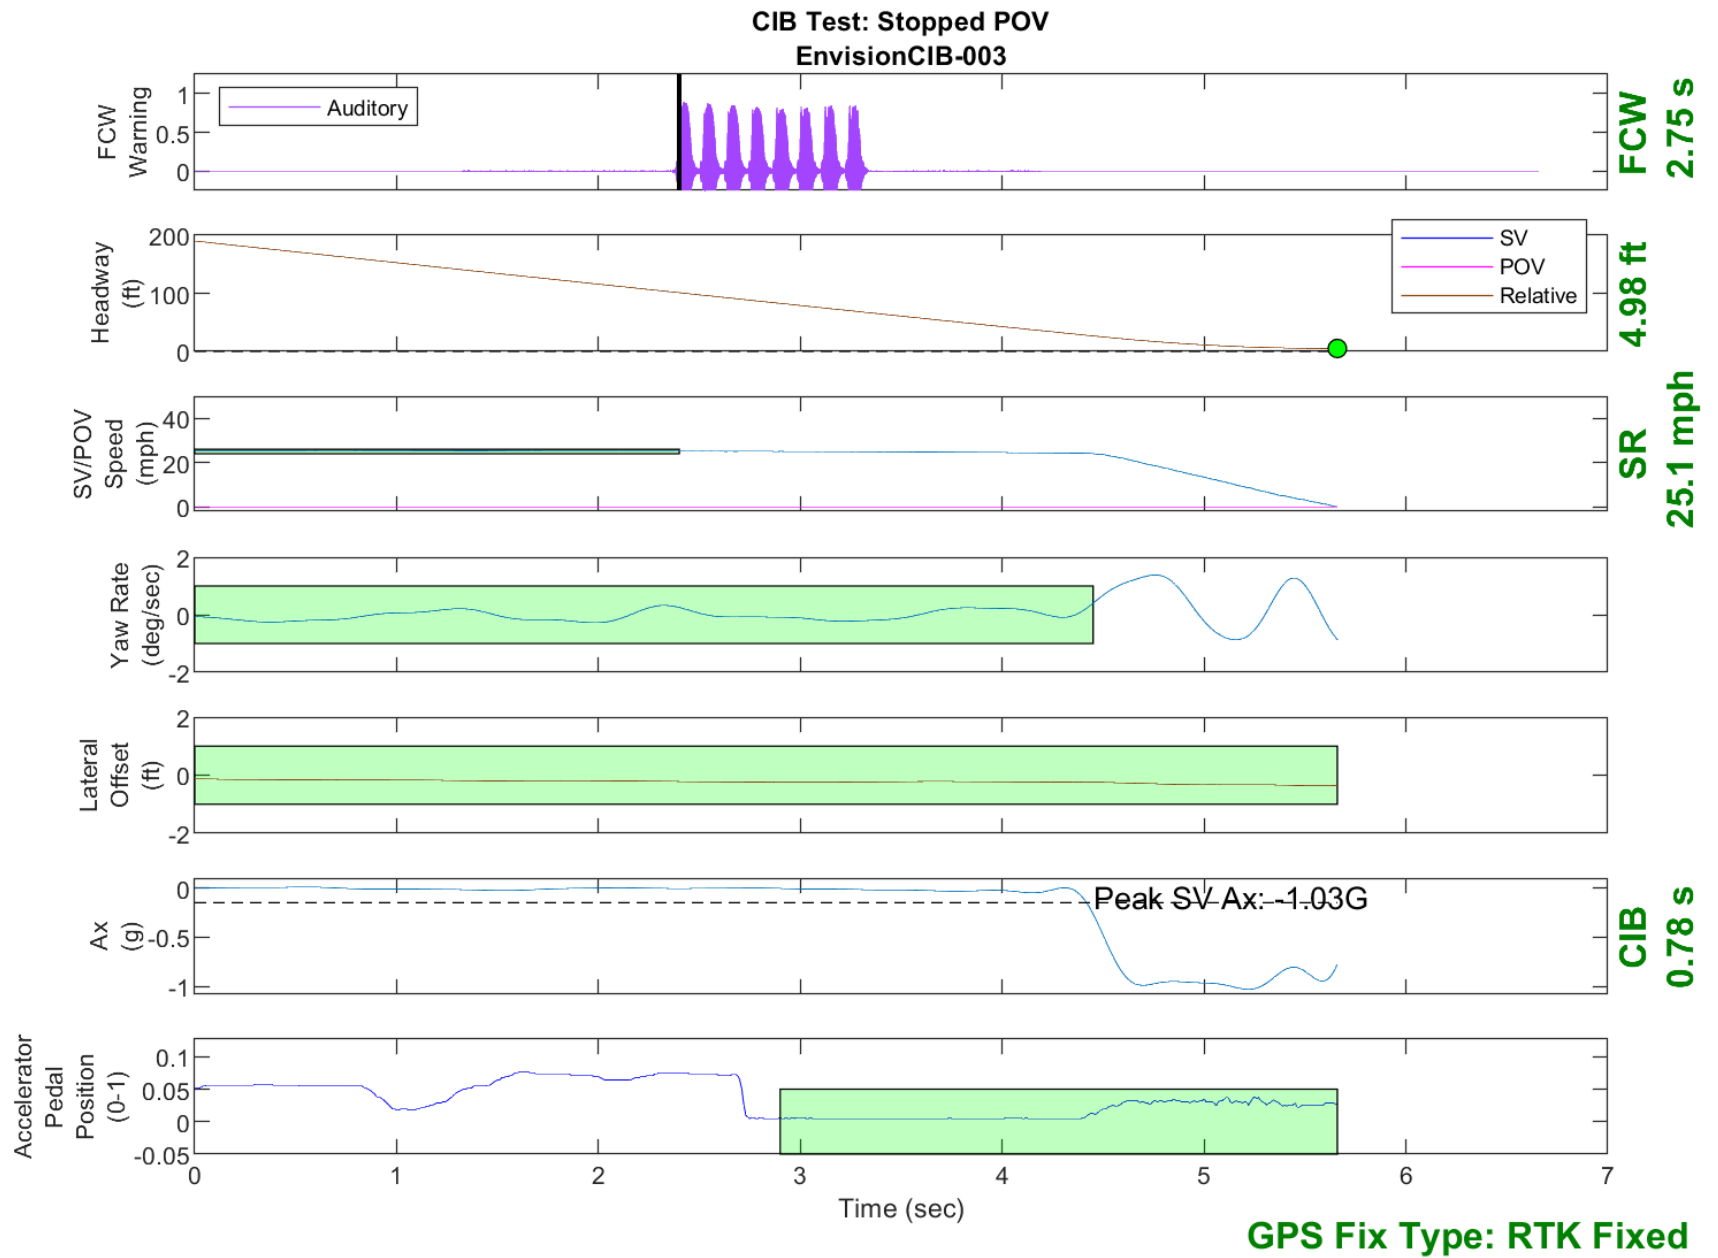


Figure D11. Time History for CIB Run 3, SV Encounters Stopped POV

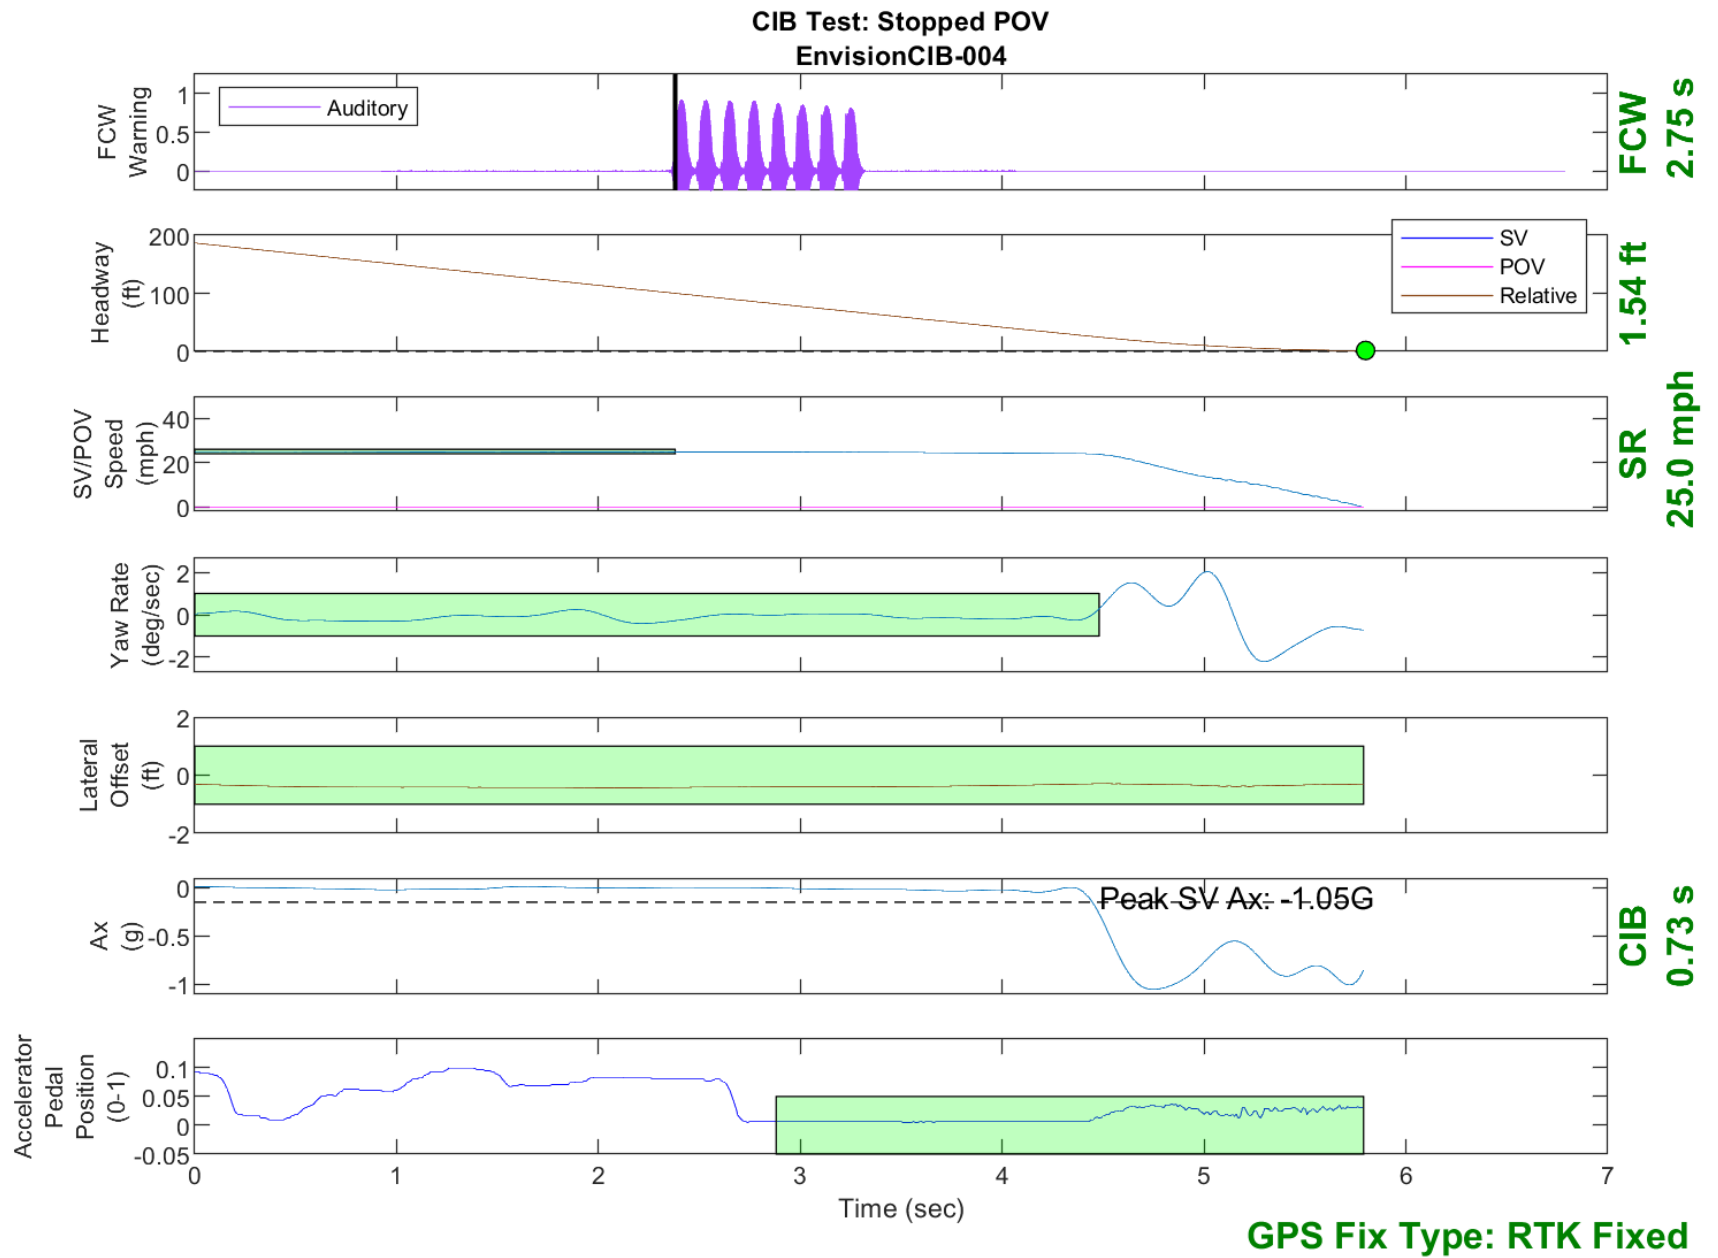


Figure D12. Time History for CIB Run 4, SV Encounters Stopped POV

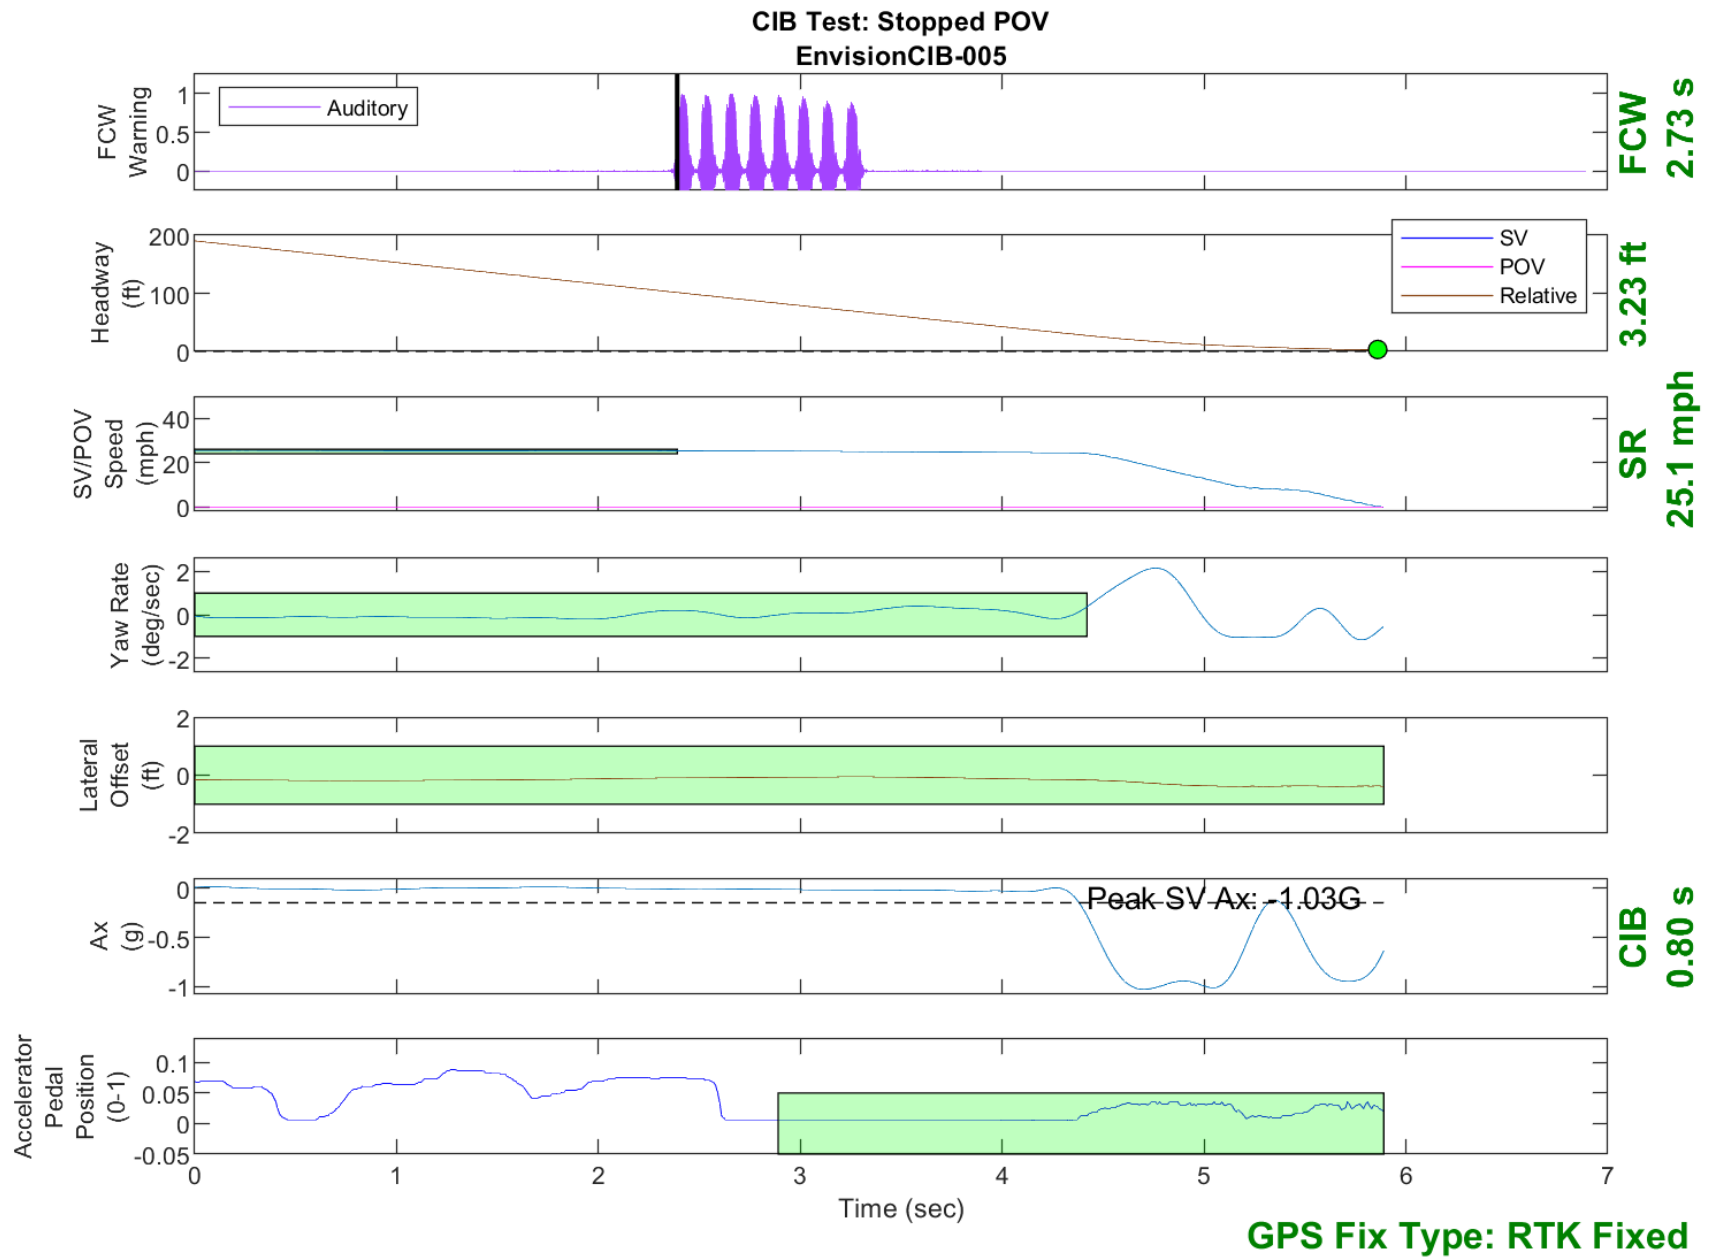


Figure D13. Time History for CIB Run 5, SV Encounters Stopped POV



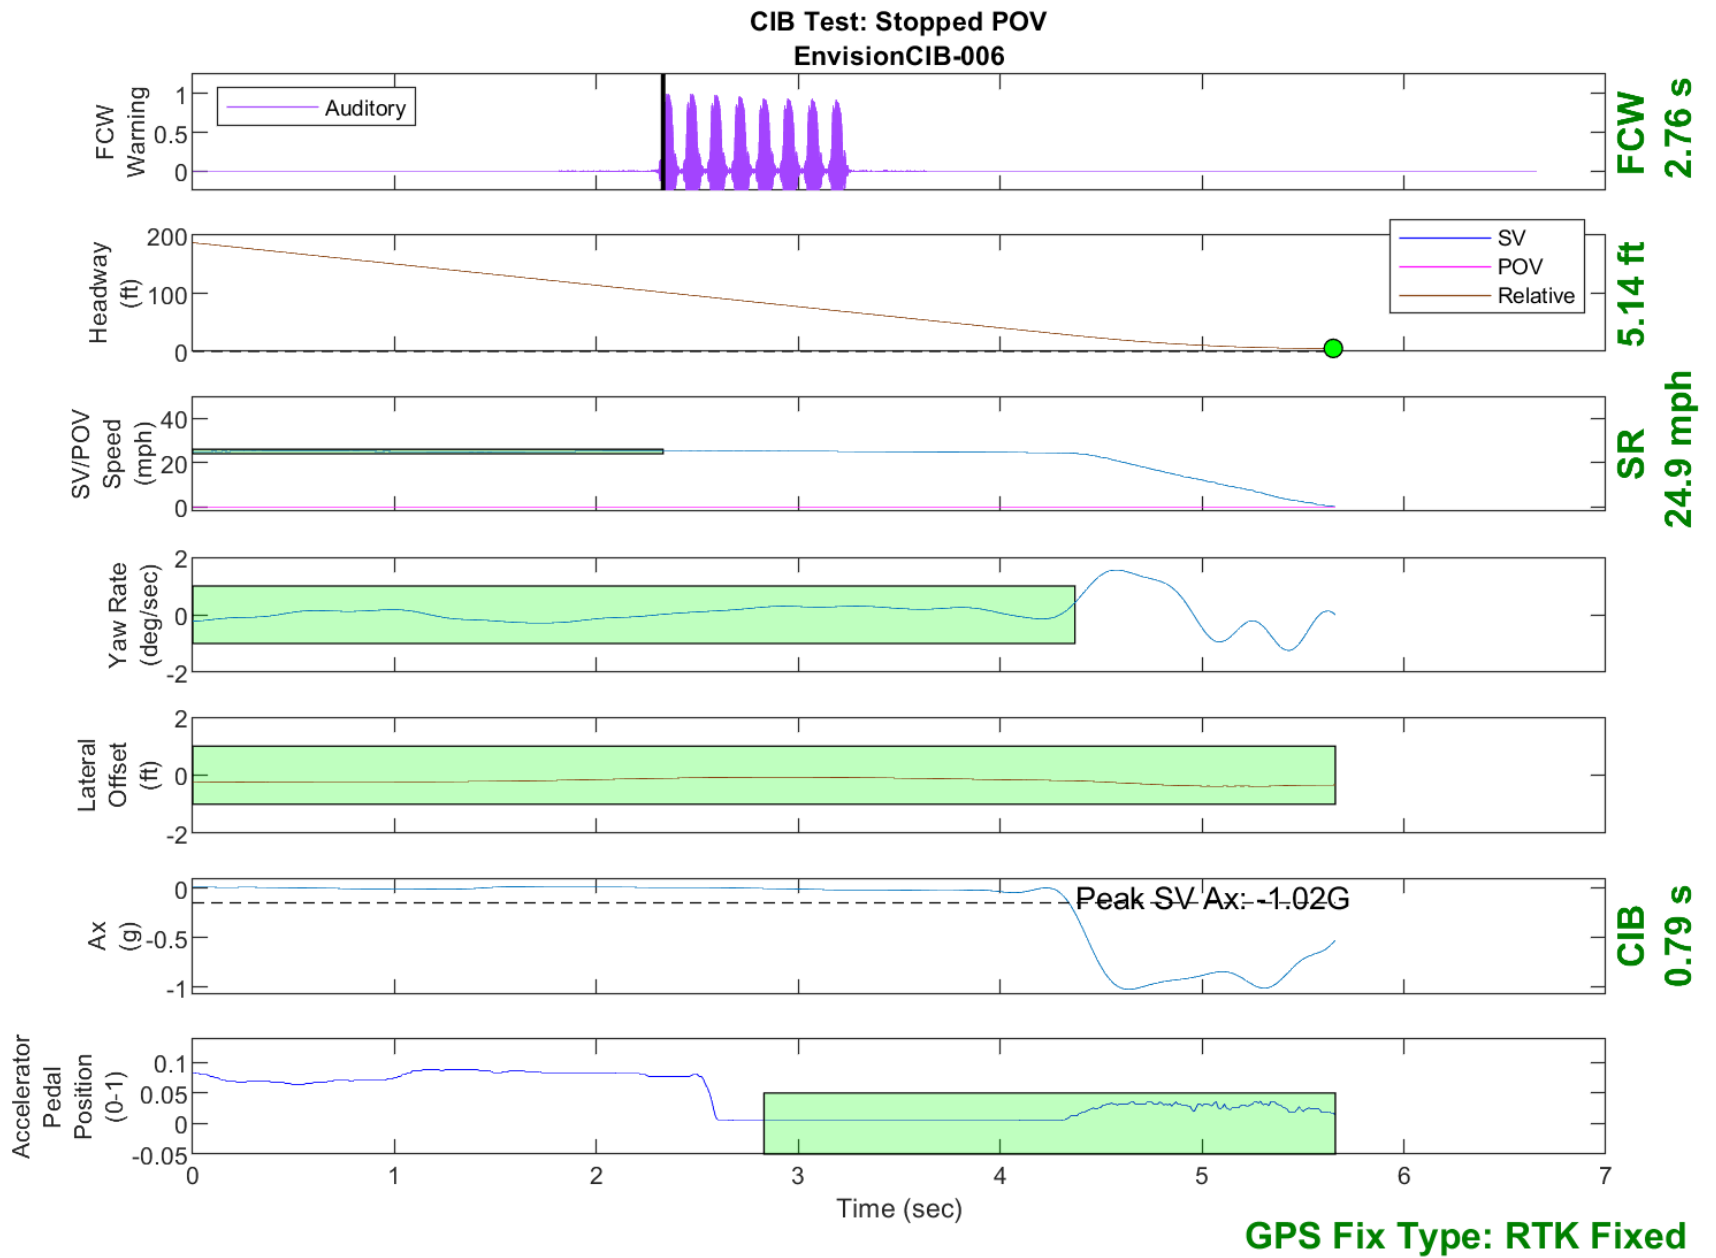


Figure D14. Time History for CIB Run 6, SV Encounters Stopped POV

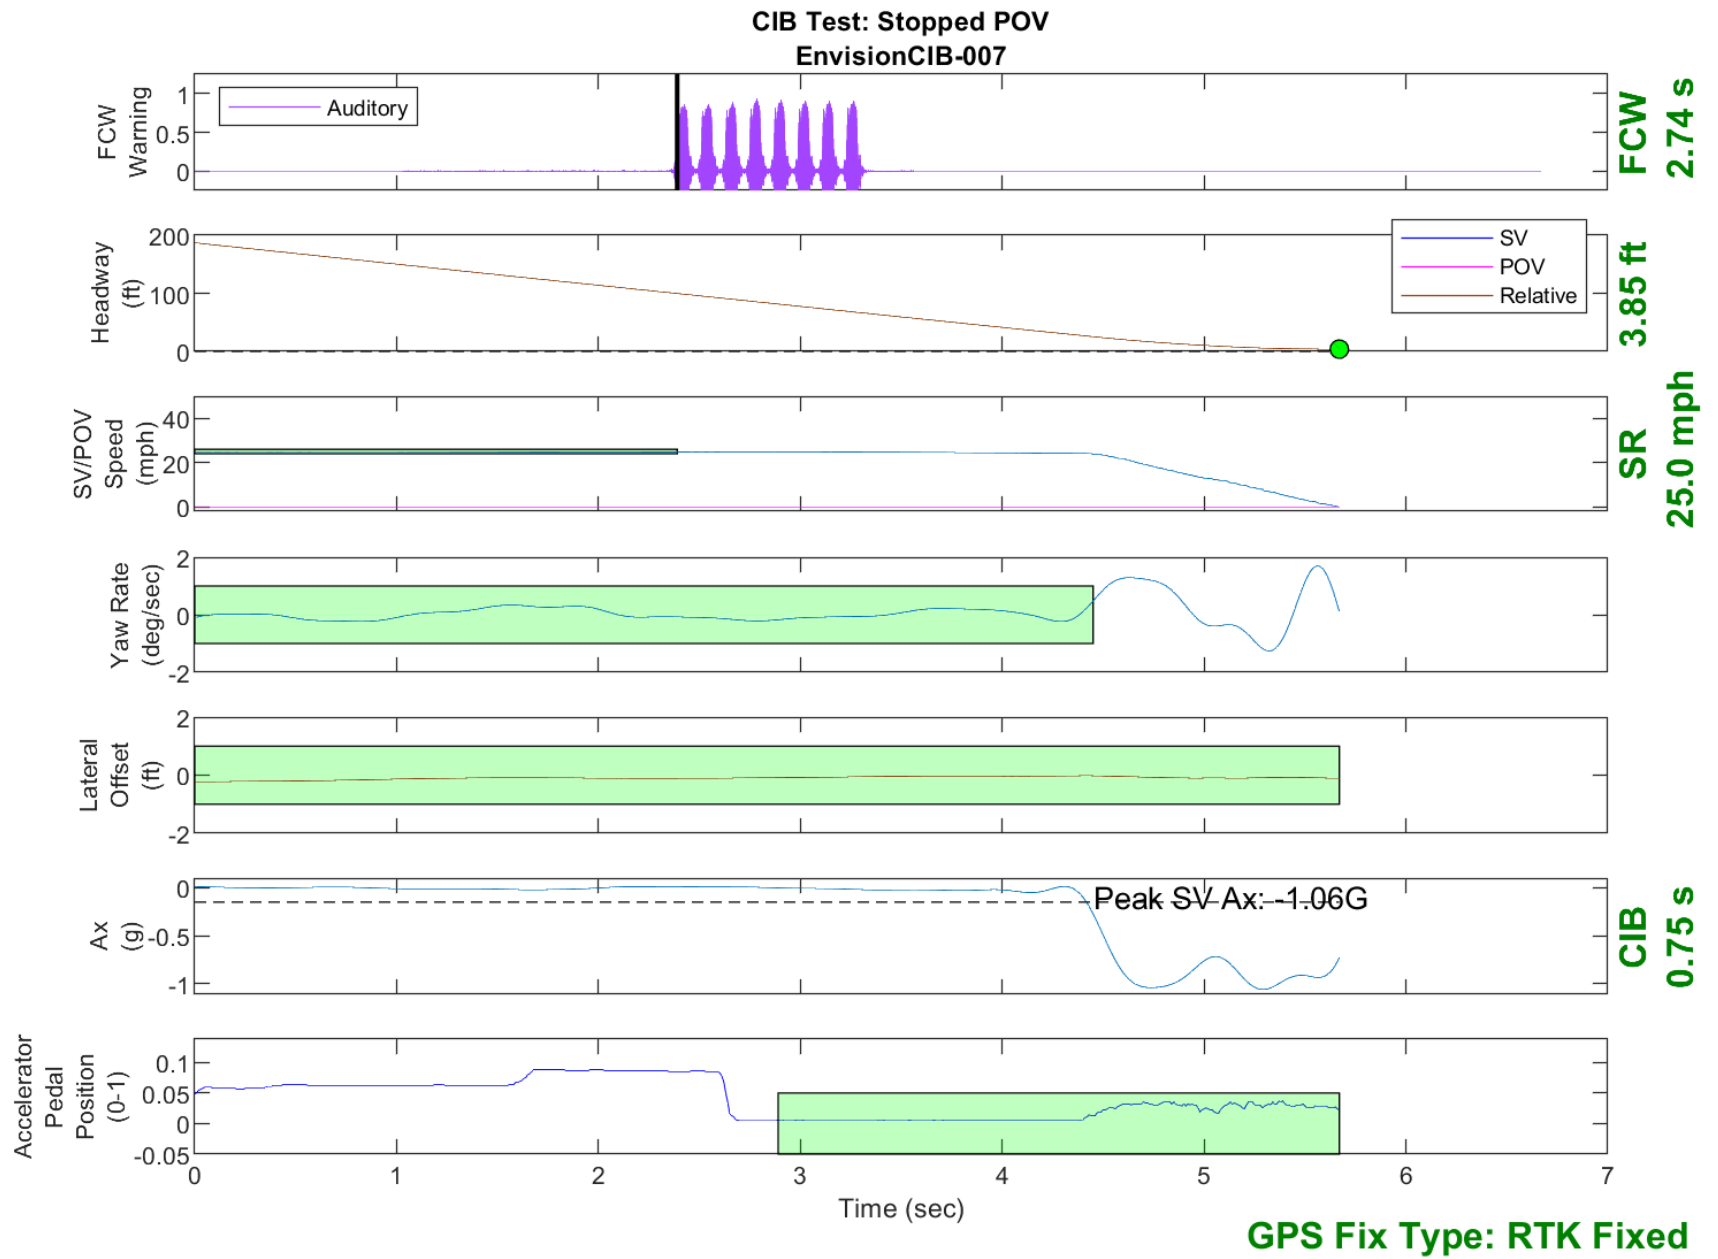


Figure D15. Time History for CIB Run 7, SV Encounters Stopped POV

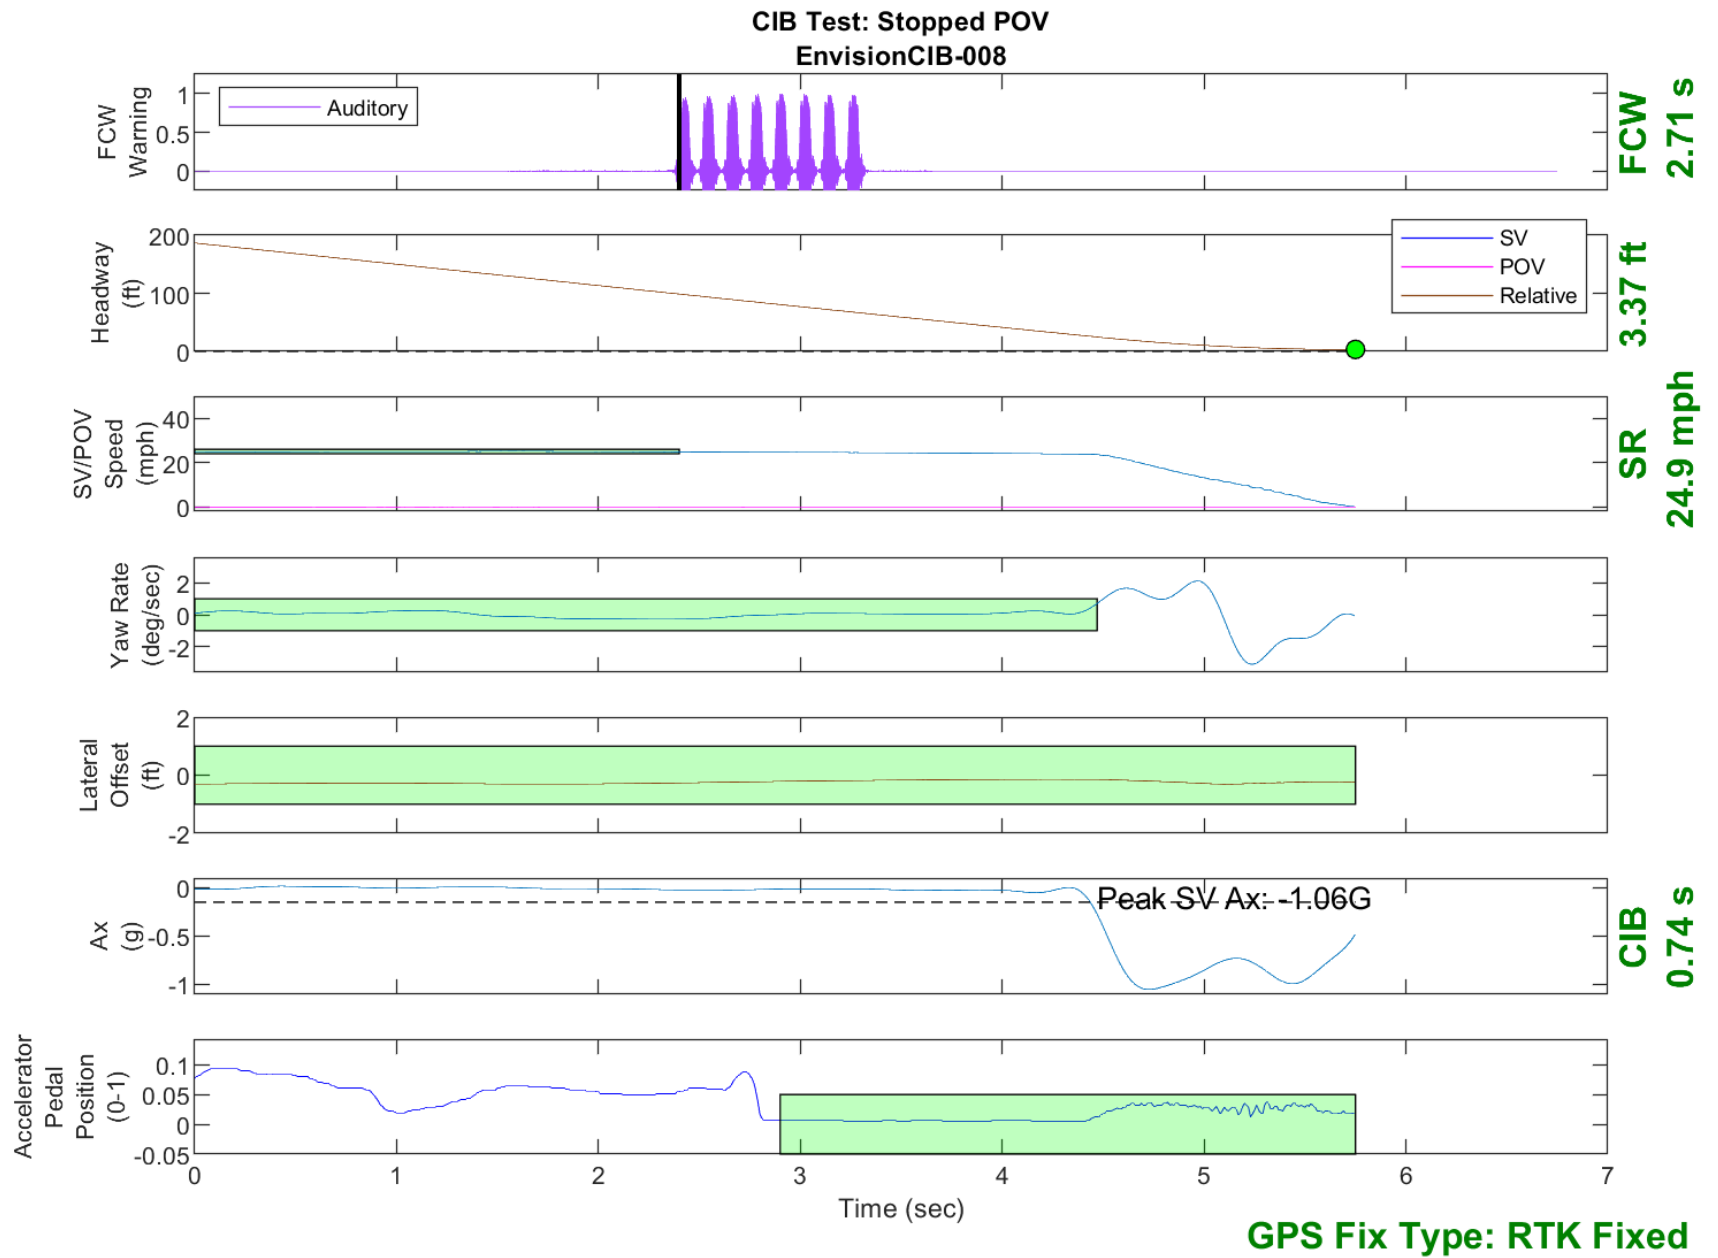


Figure D16. Time History for CIB Run 8, SV Encounters Stopped POV

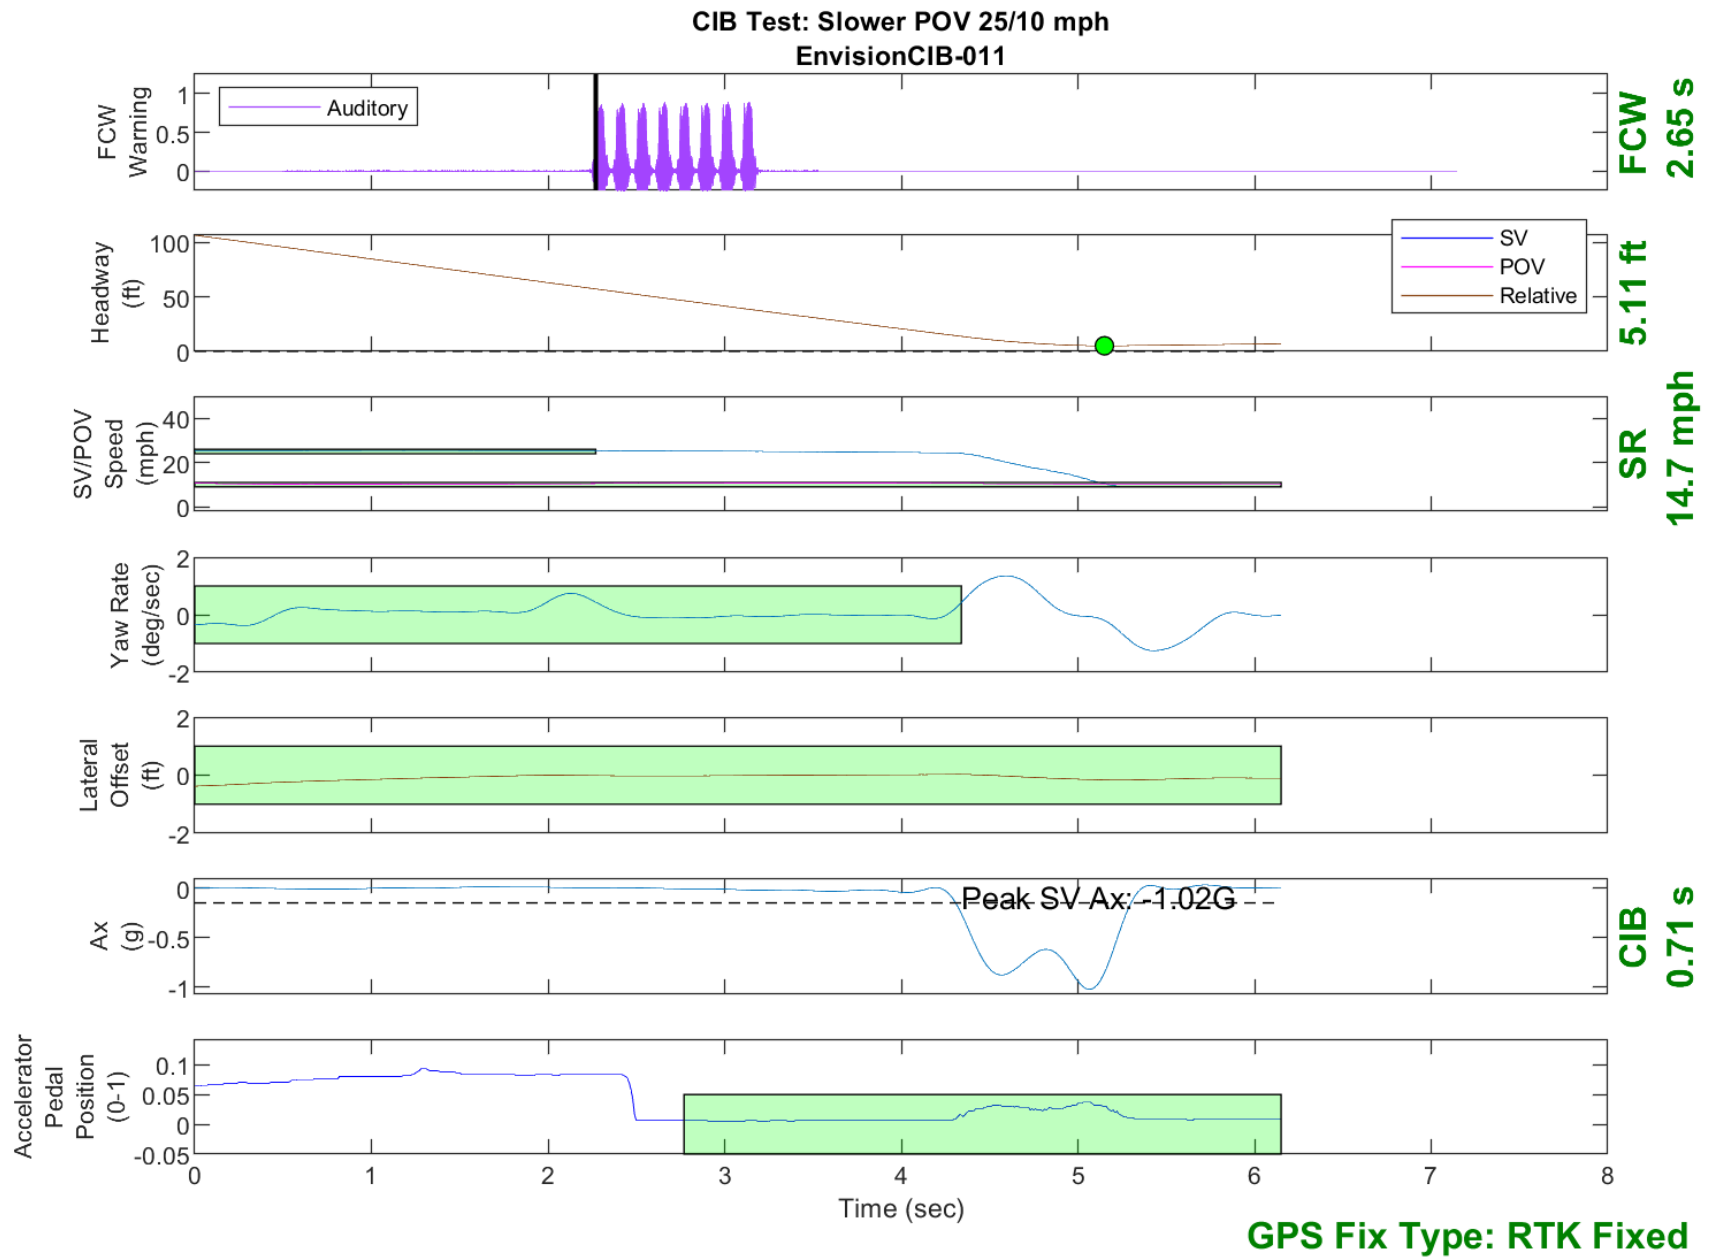


Figure D17. Time History for CIB Run 11, SV Encounters Slower POV, SV 25 mph, POV 10 mph

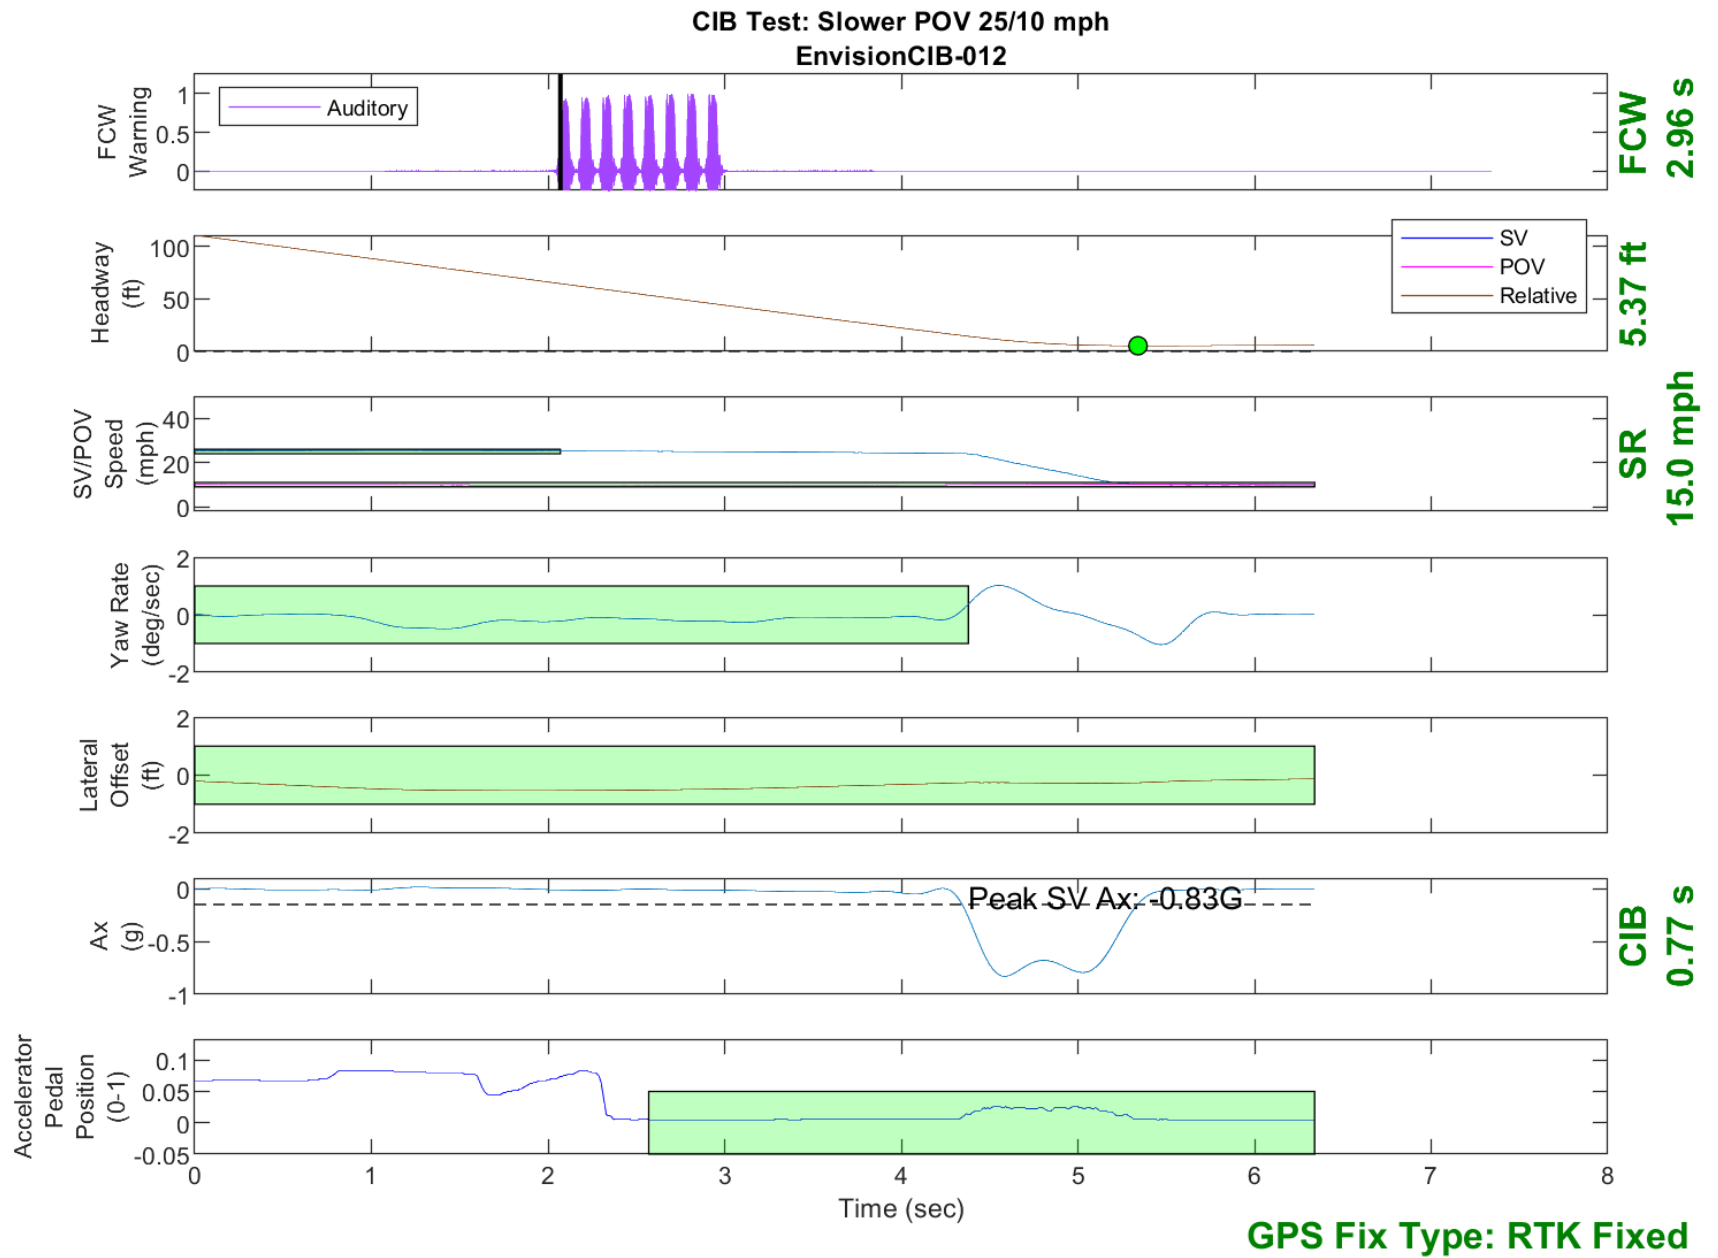


Figure D18. Time History for CIB Run 12, SV Encounters Slower POV, SV 25 mph, POV 10 mph

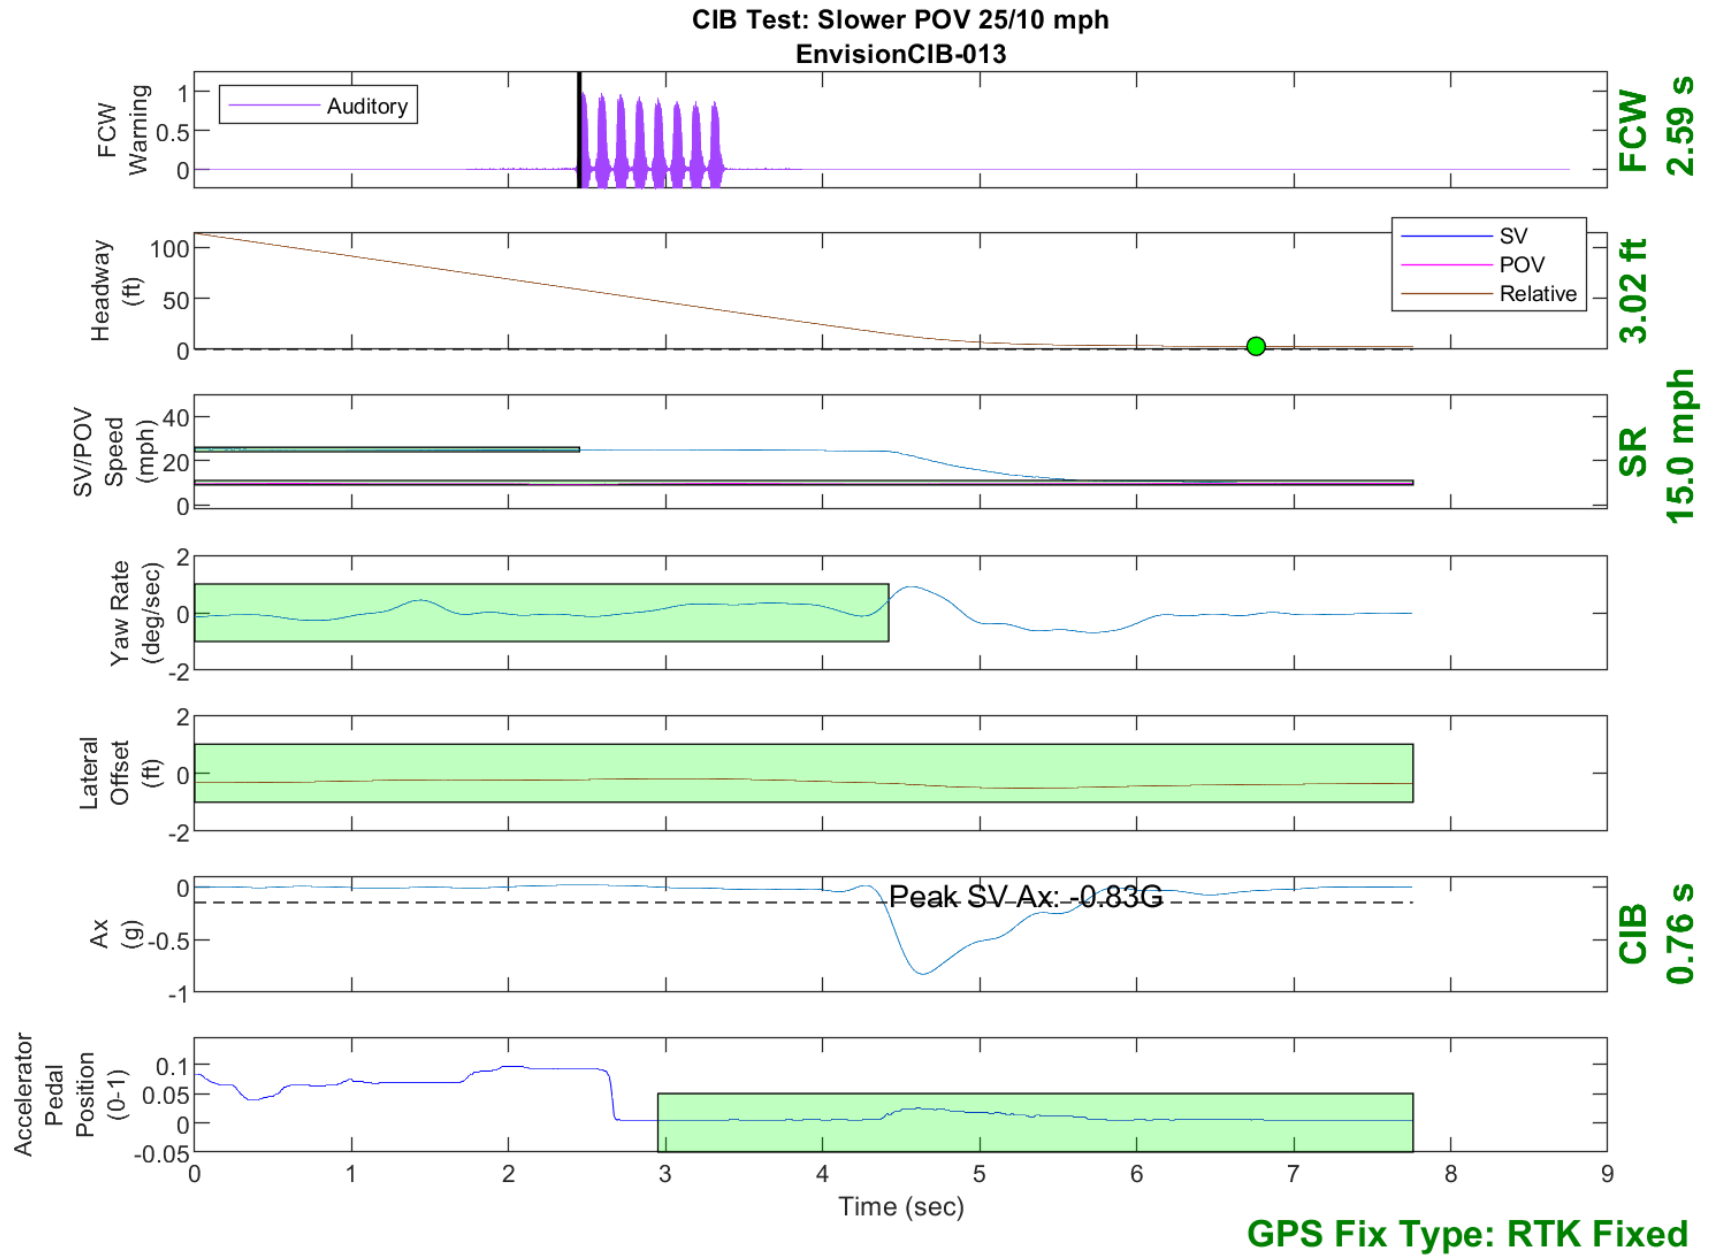


Figure D19. Time History for CIB Run 13, SV Encounters Slower POV, SV 25 mph, POV 10 mph

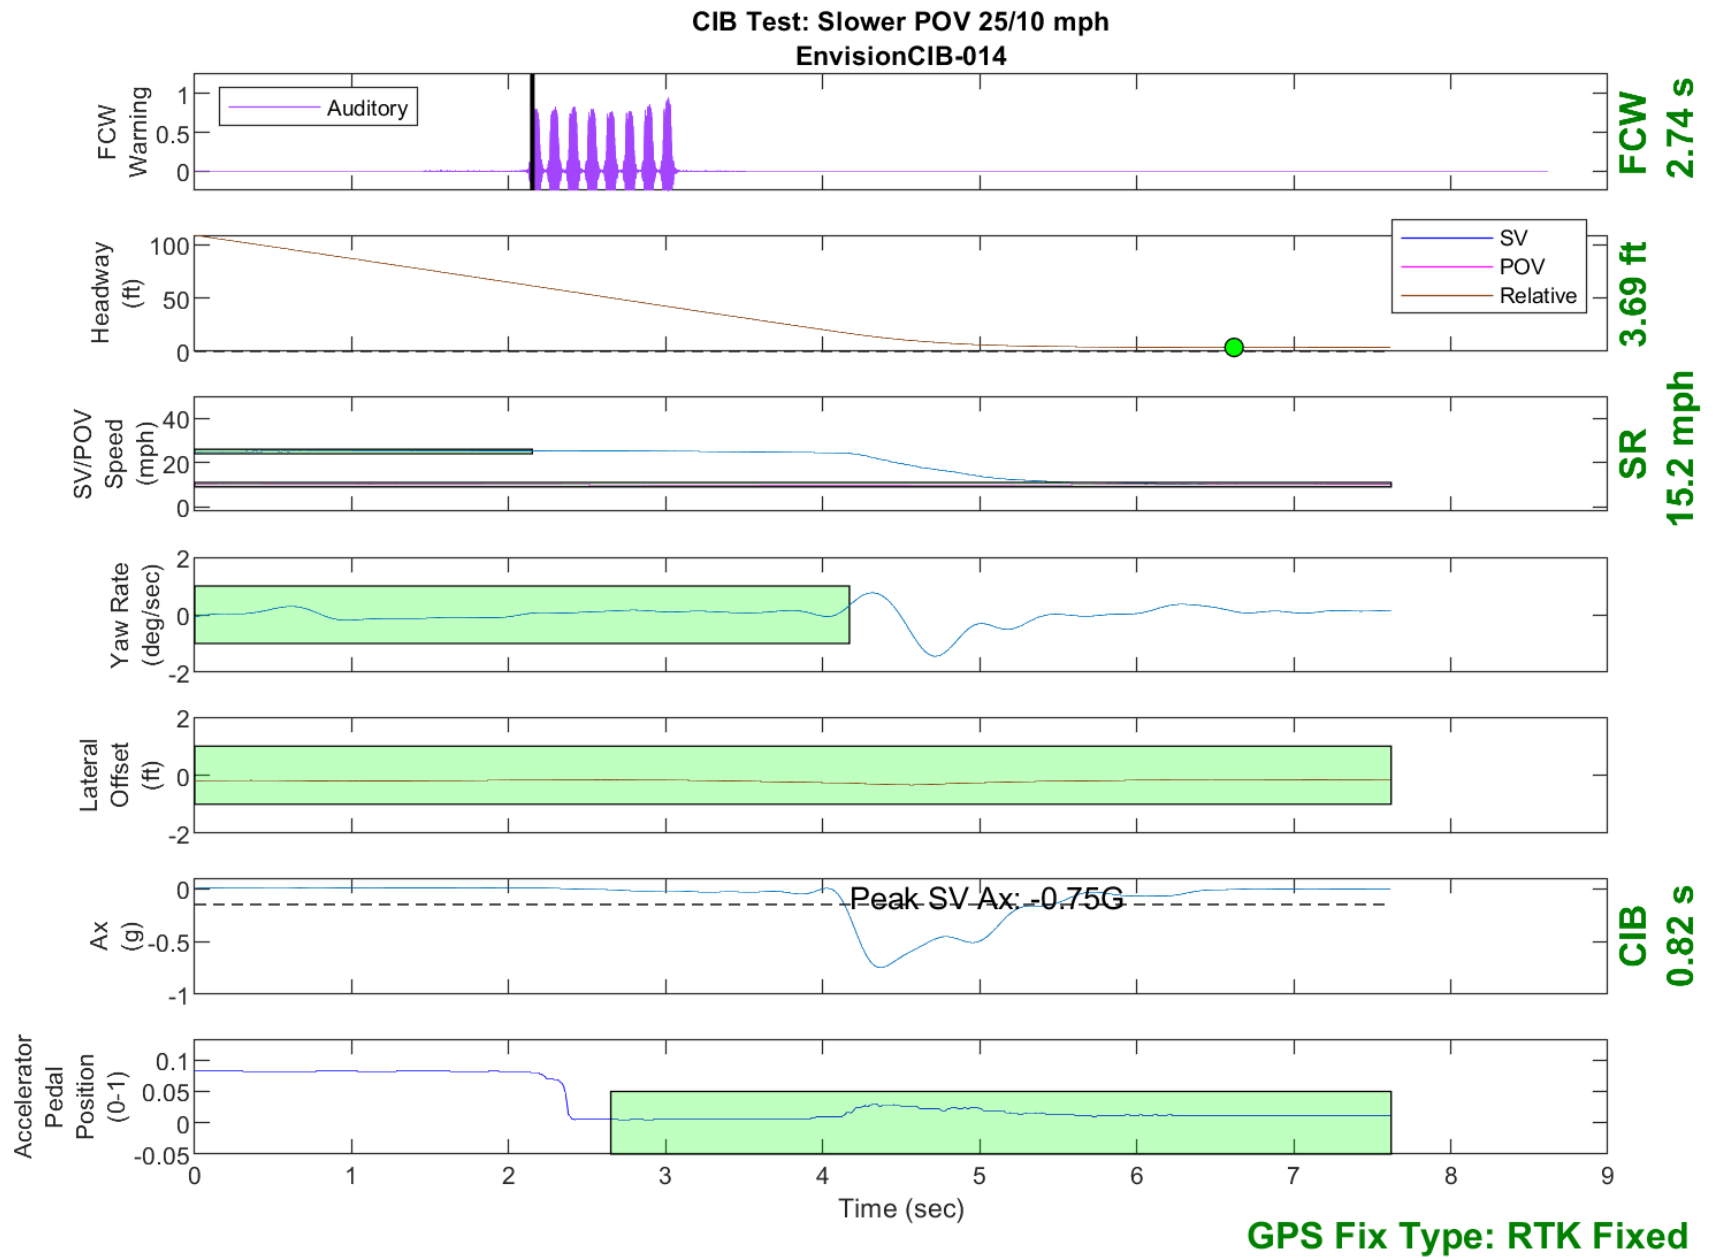


Figure D20. Time History for CIB Run 14, SV Encounters Slower POV, SV 25 mph, POV 10 mph

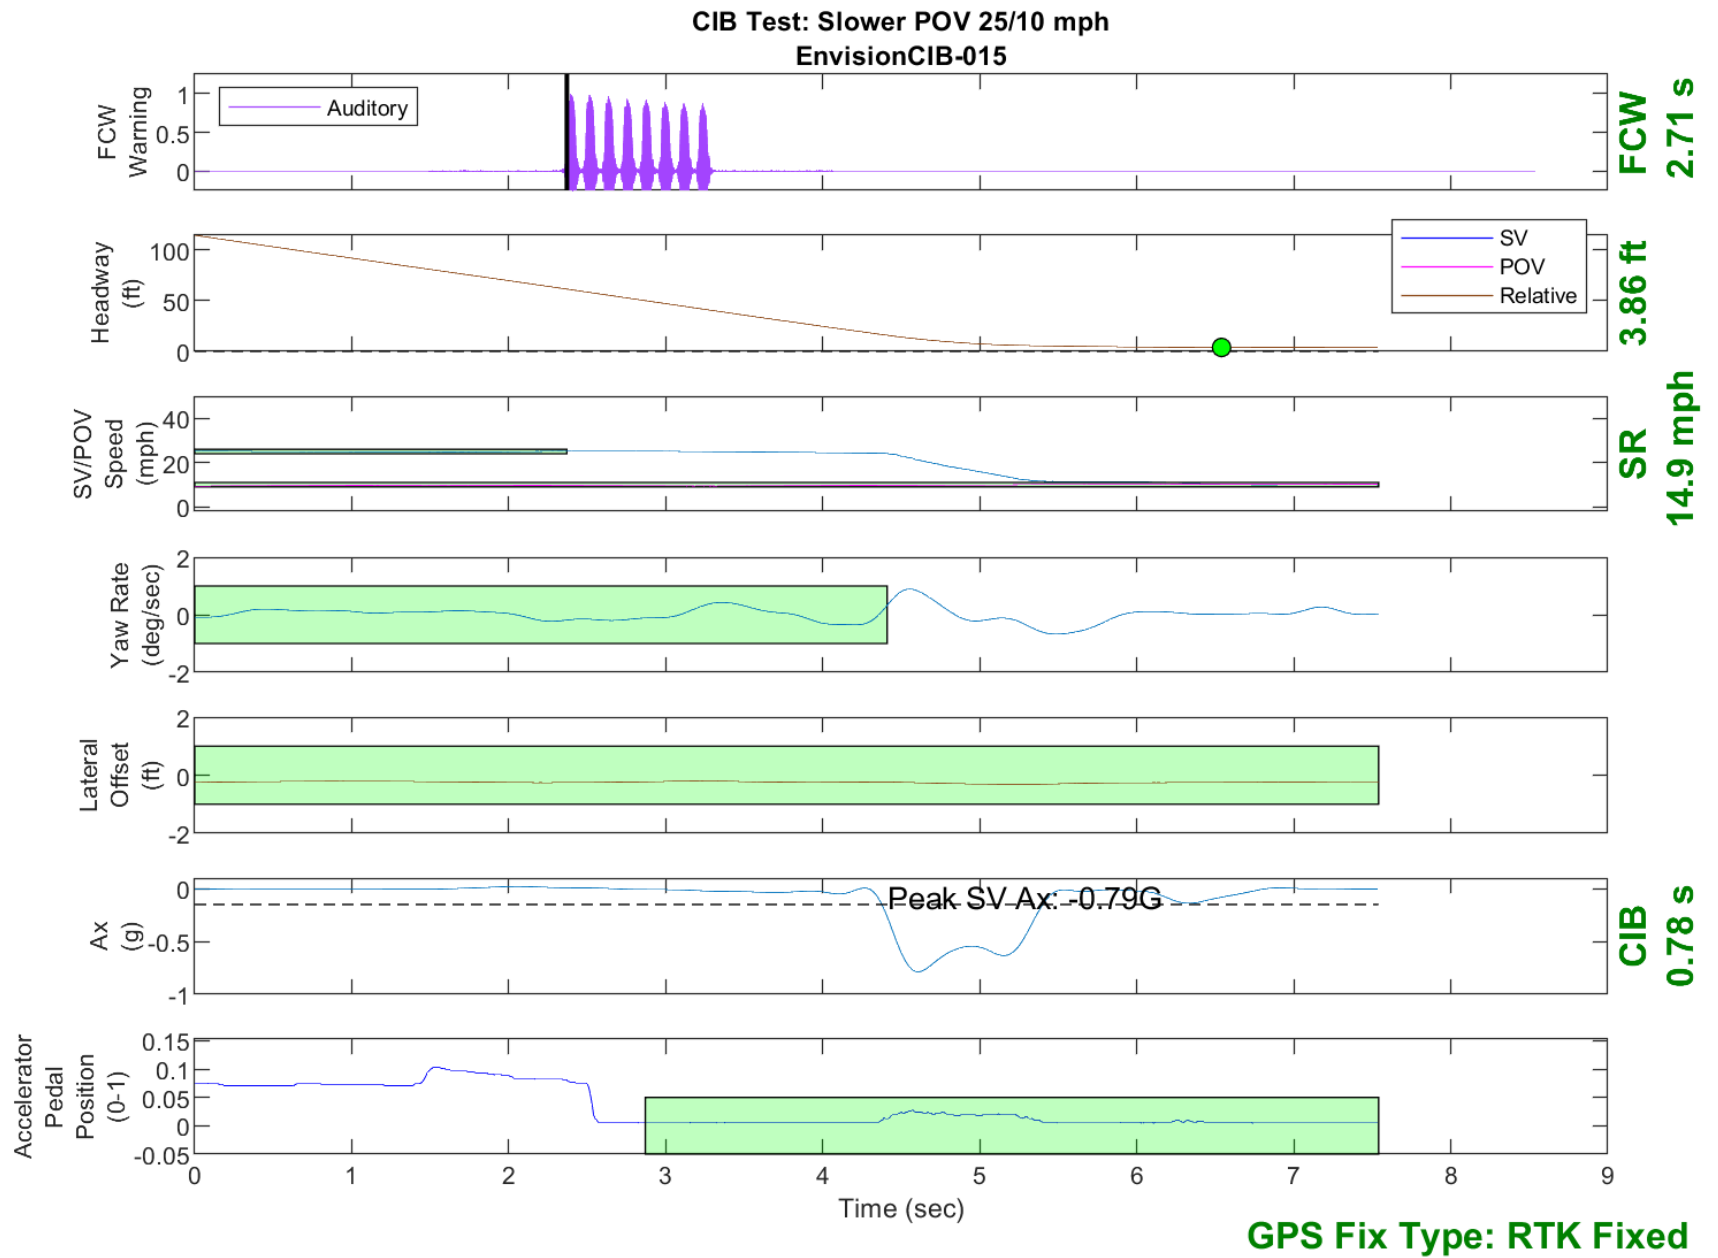


Figure D21. Time History for CIB Run 15, SV Encounters Slower POV, SV 25 mph, POV 10 mph



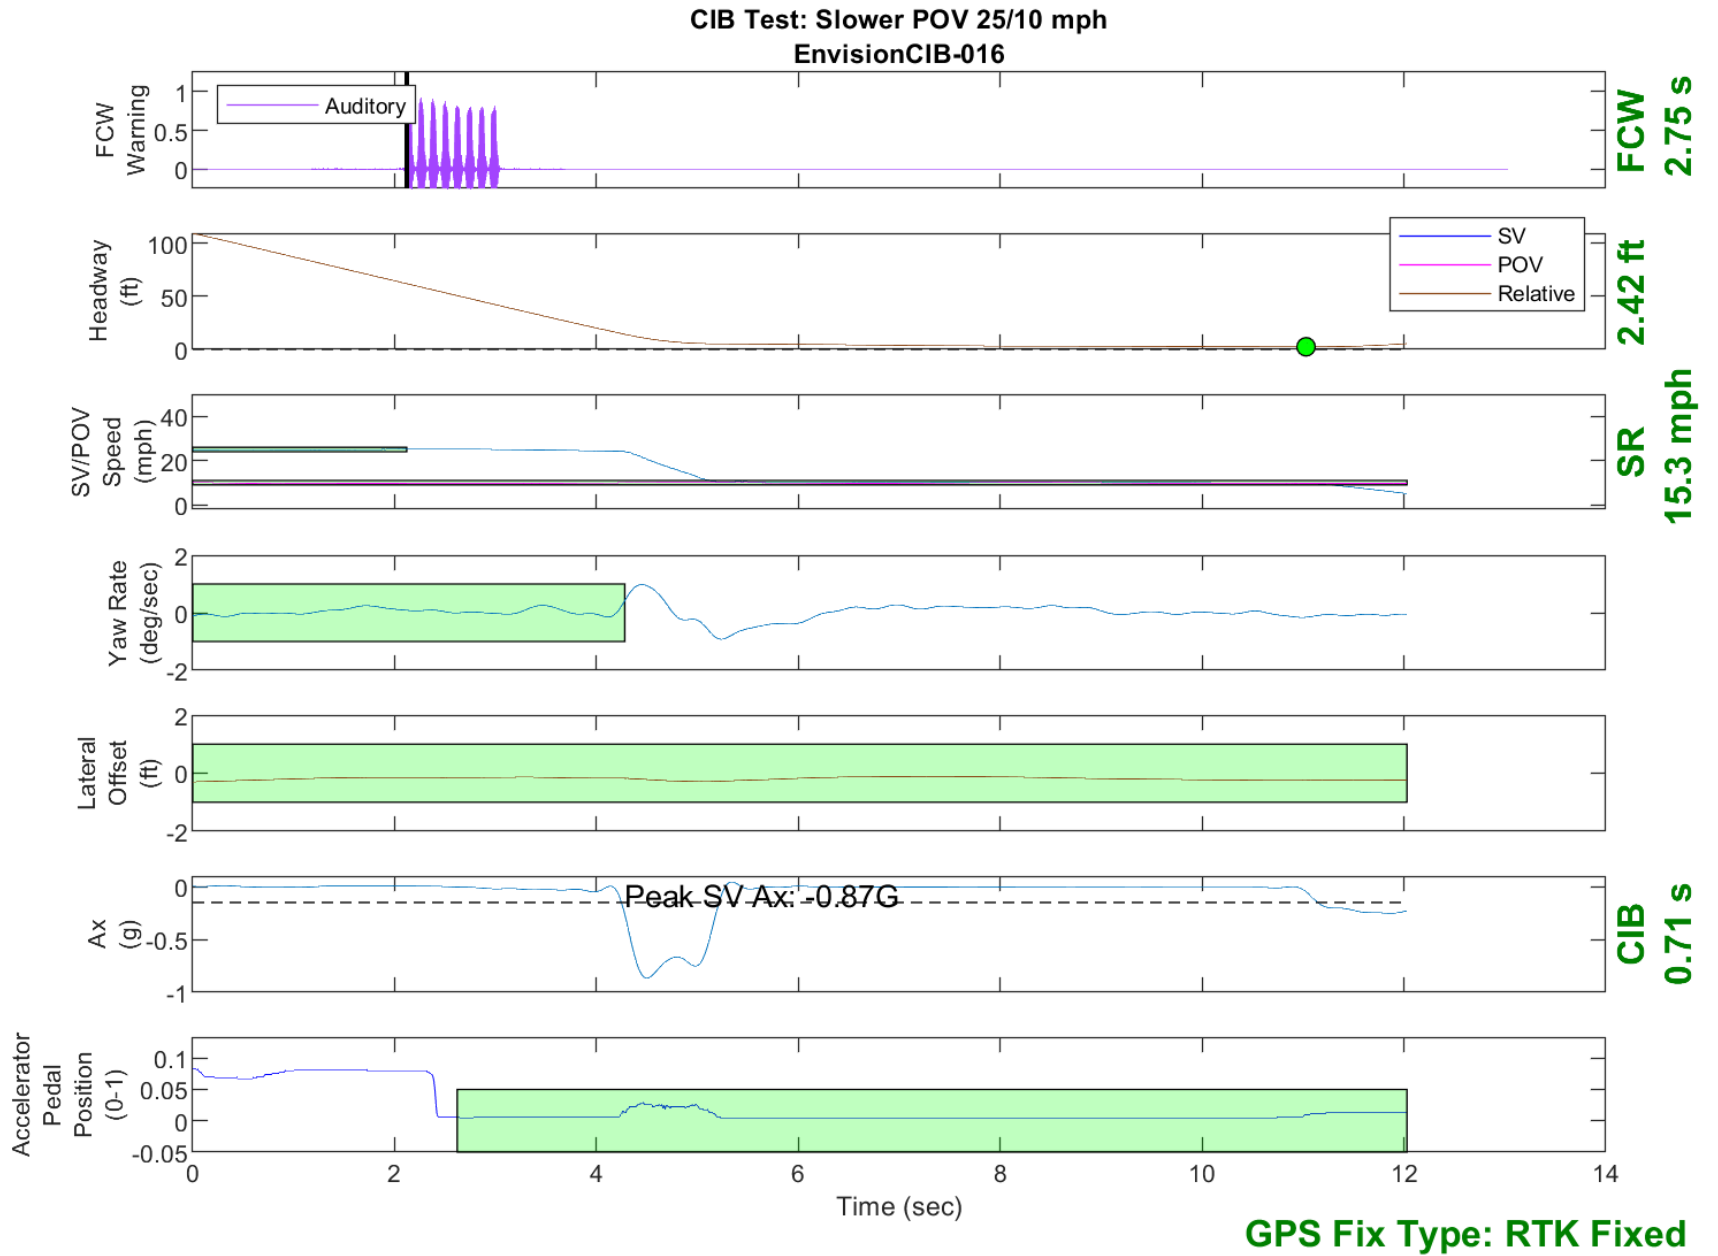


Figure D22. Time History for CIB Run 16, SV Encounters Slower POV, SV 25 mph, POV 10 mph

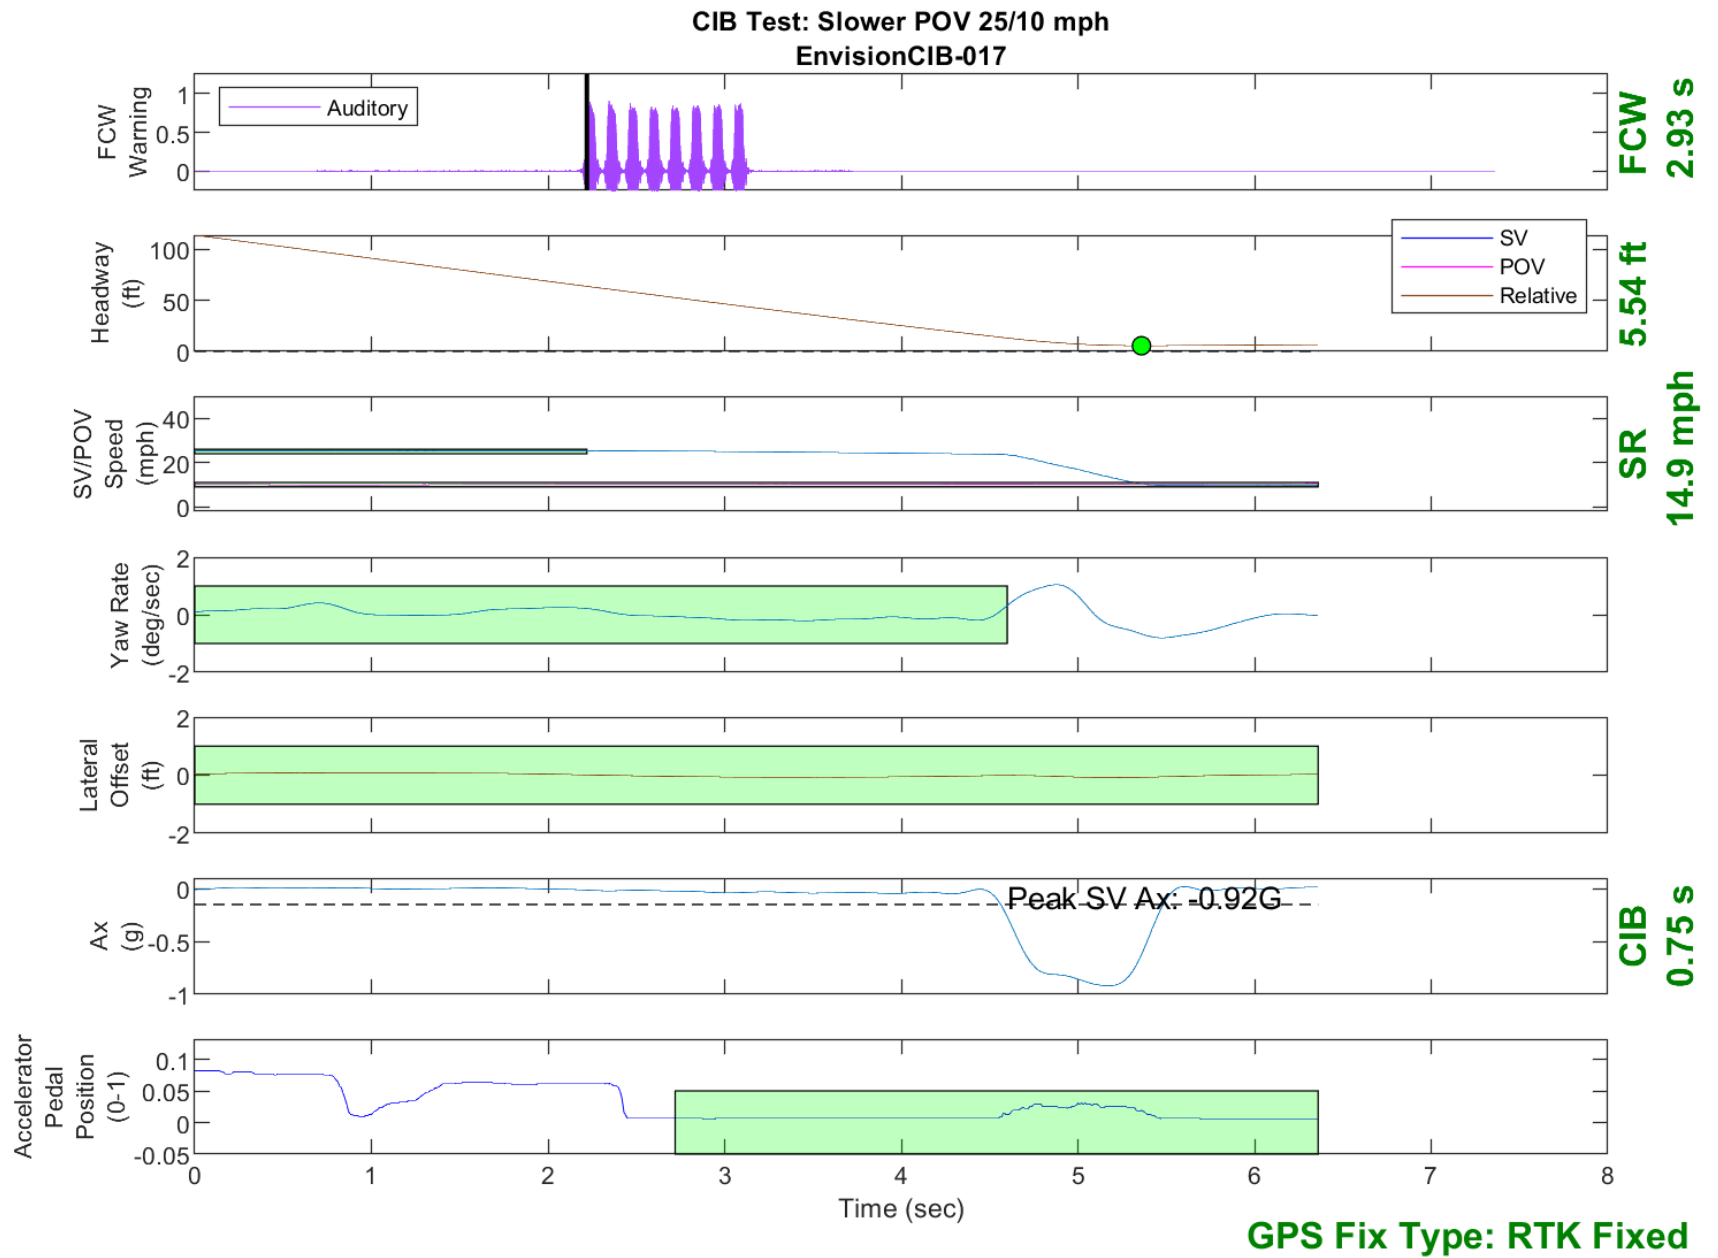


Figure D23. Time History for CIB Run 17, SV Encounters Slower POV, SV 25 mph, POV 10 mph

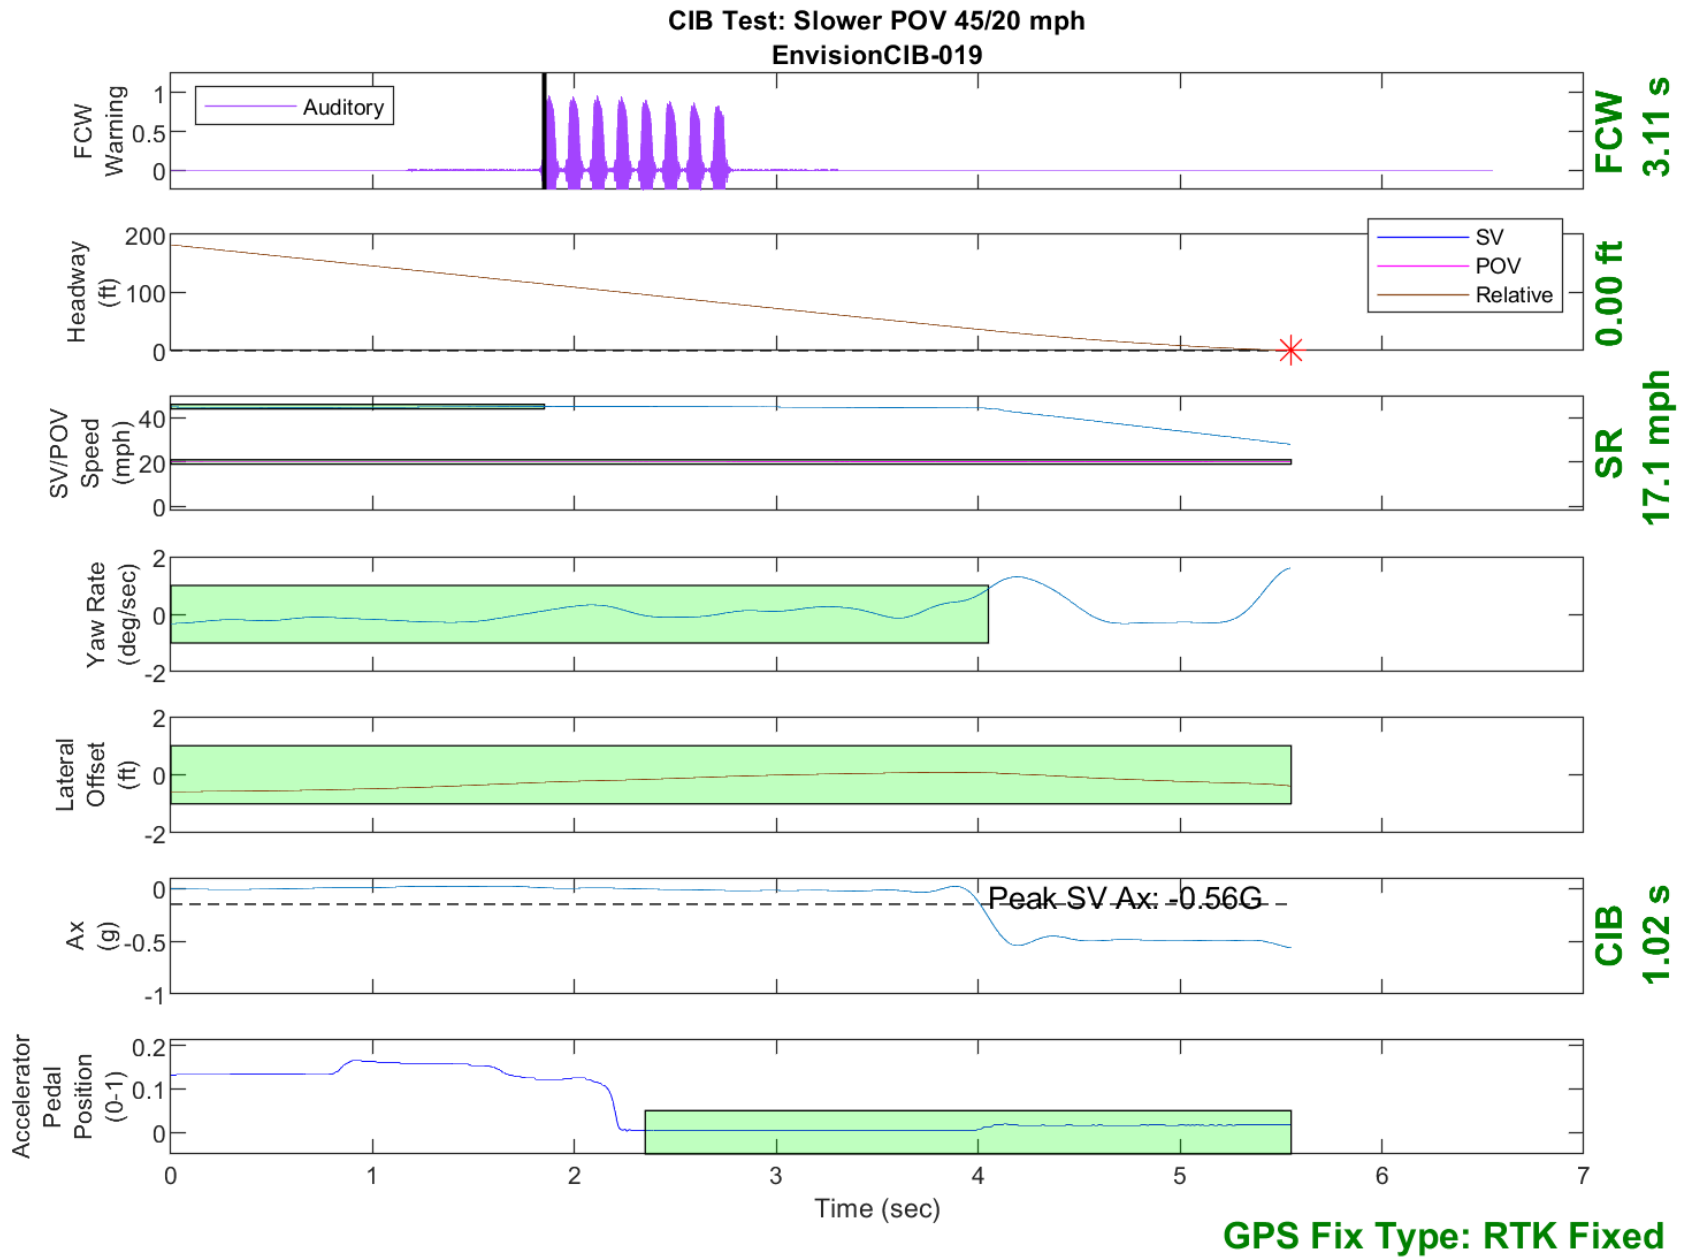


Figure D24. Time History for CIB Run 19, SV Encounters Slower POV, SV 45 mph, POV 20 mph

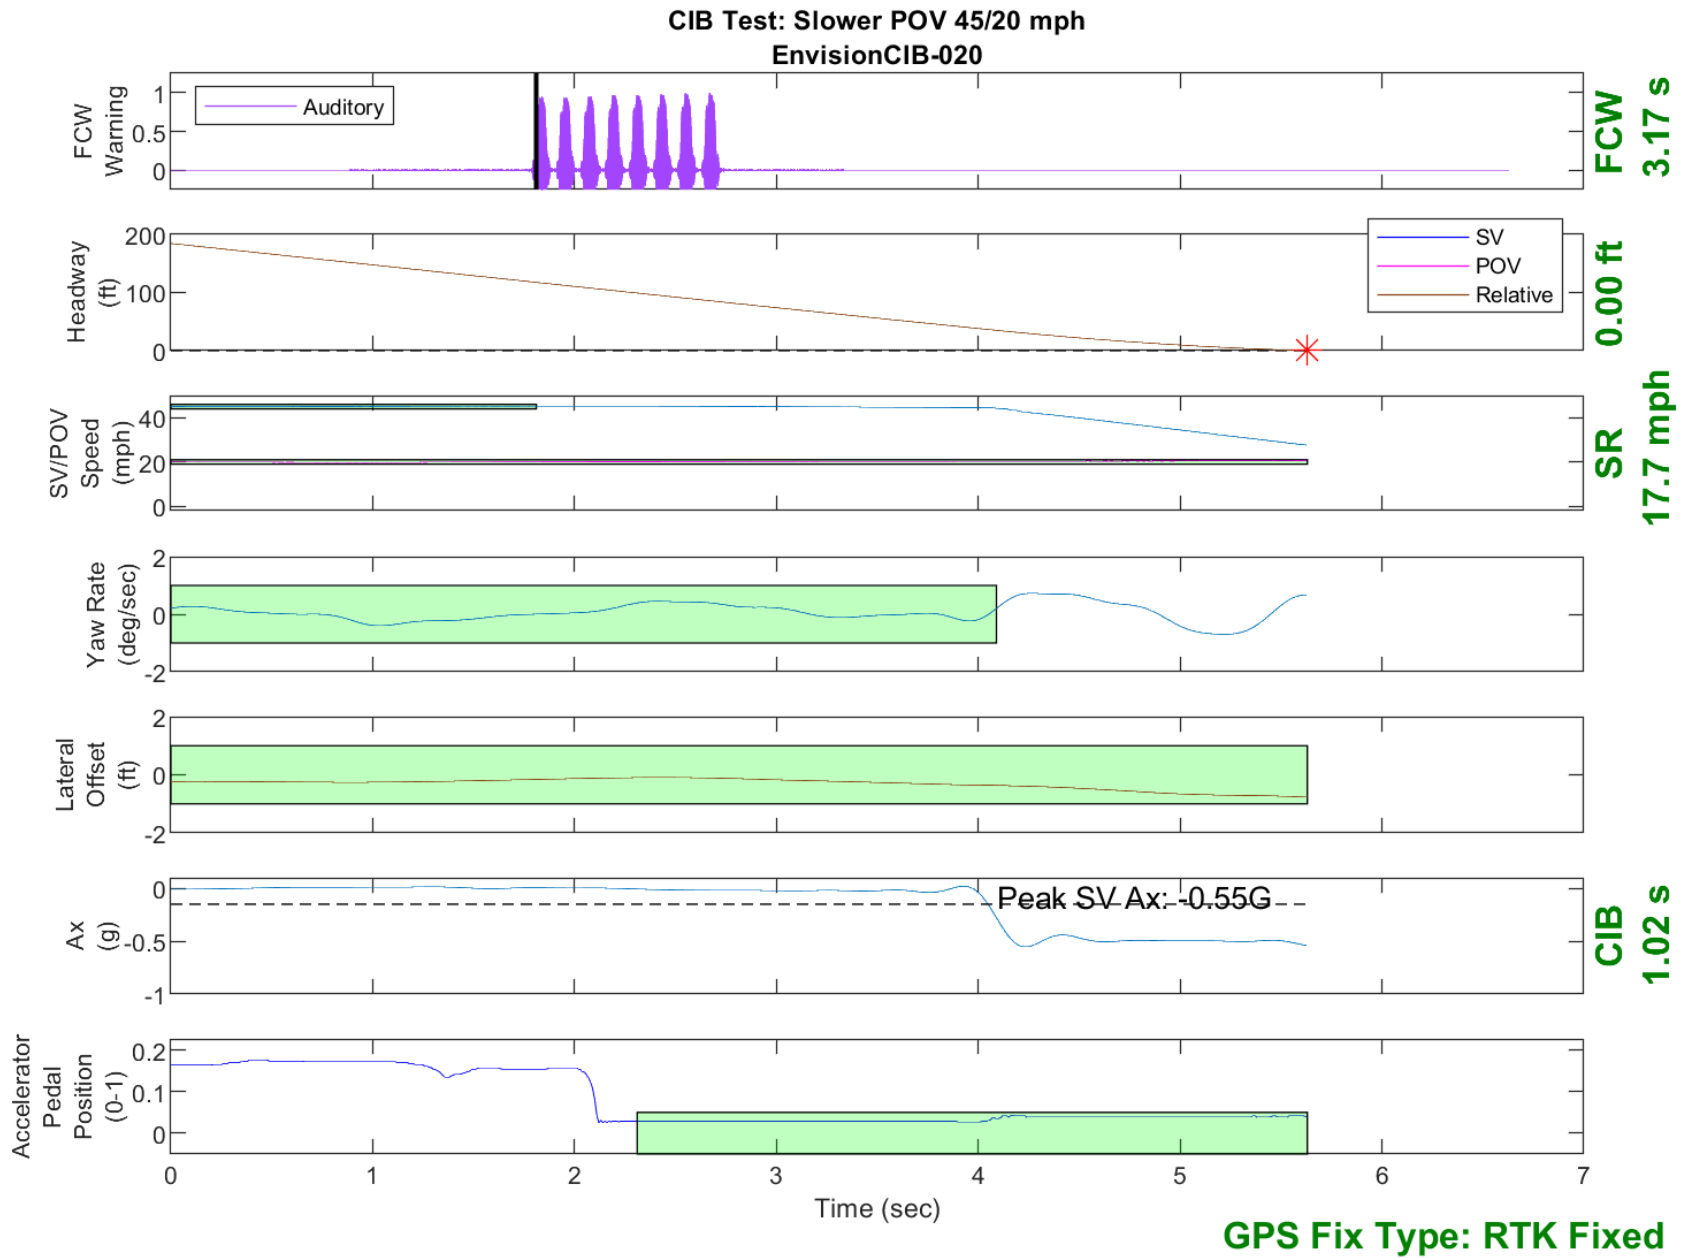


Figure D25. Time History for CIB Run 20, SV Encounters Slower POV, SV 45 mph, POV 20 mph

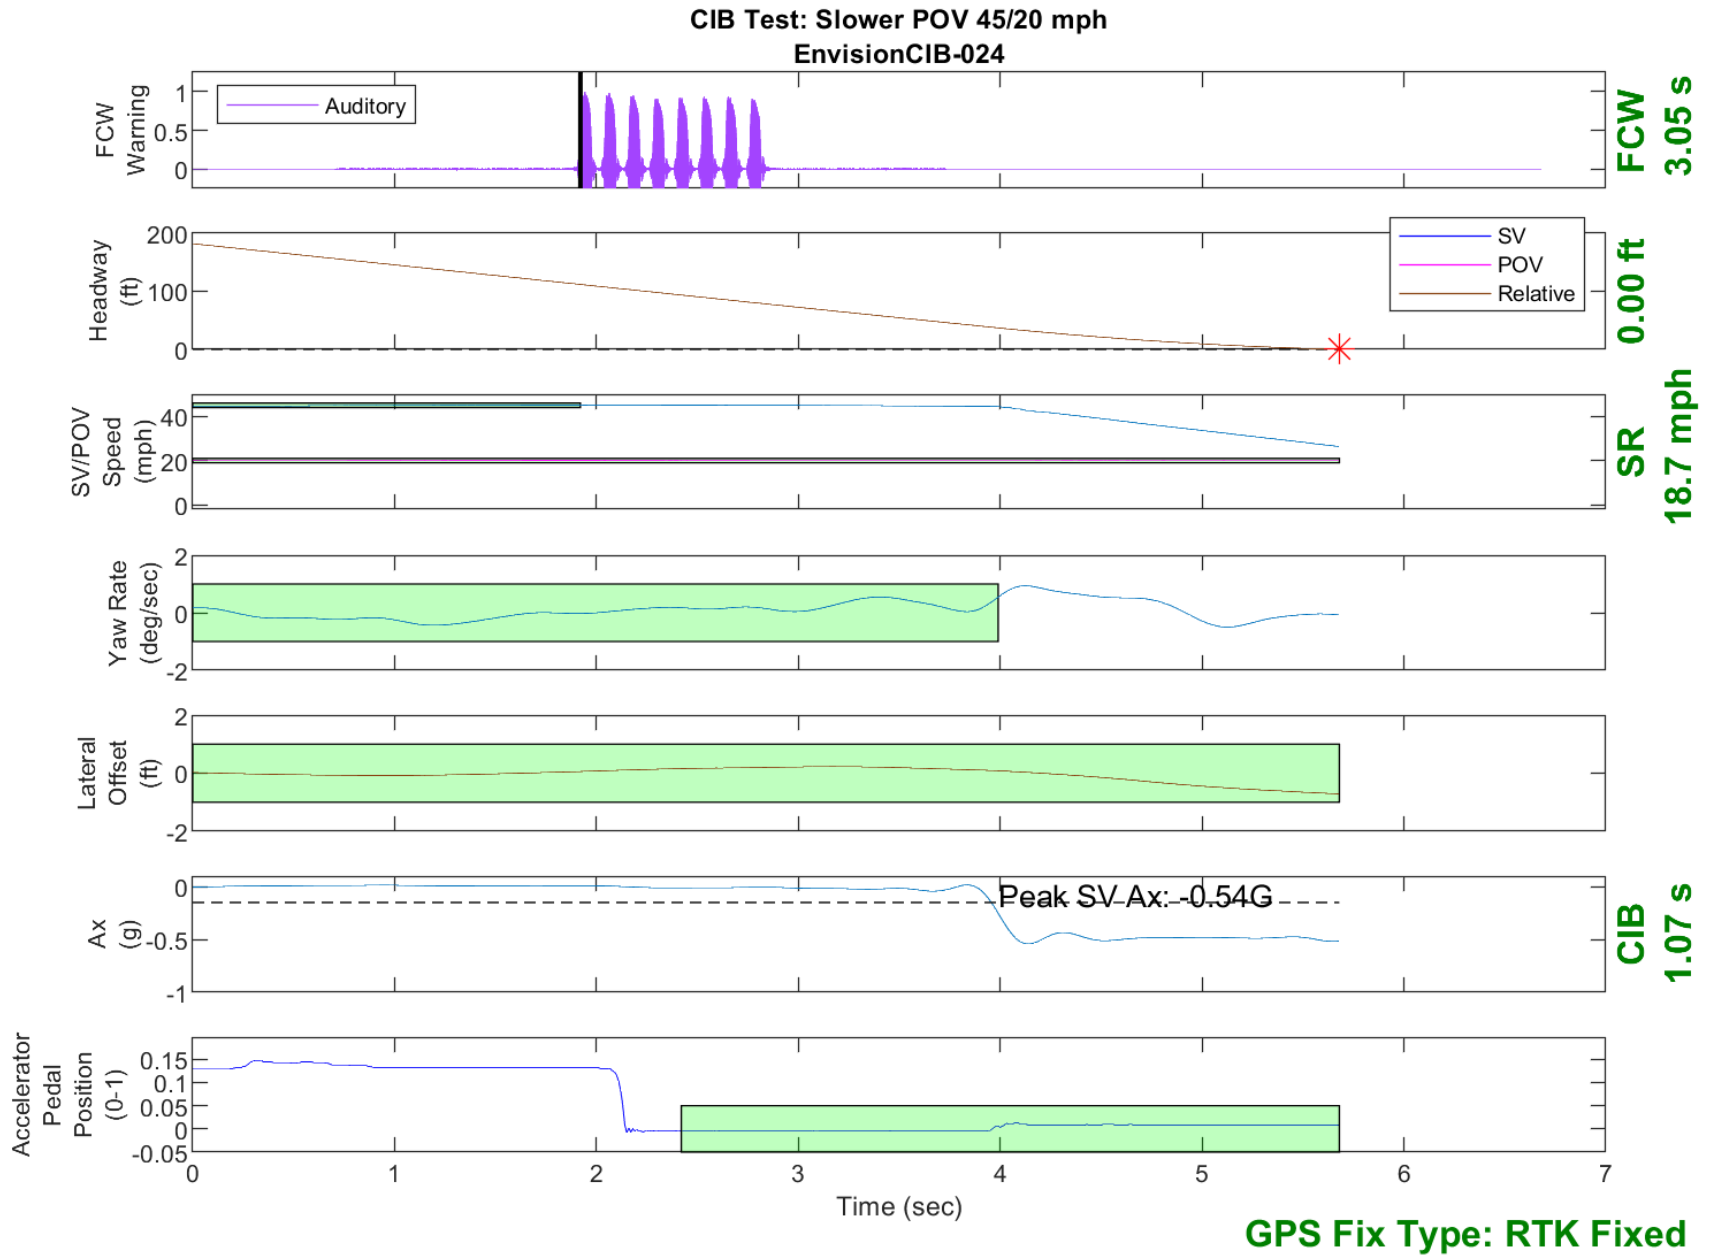


Figure D26. Time History for CIB Run 24, SV Encounters Slower POV, SV 45 mph, POV 20 mph

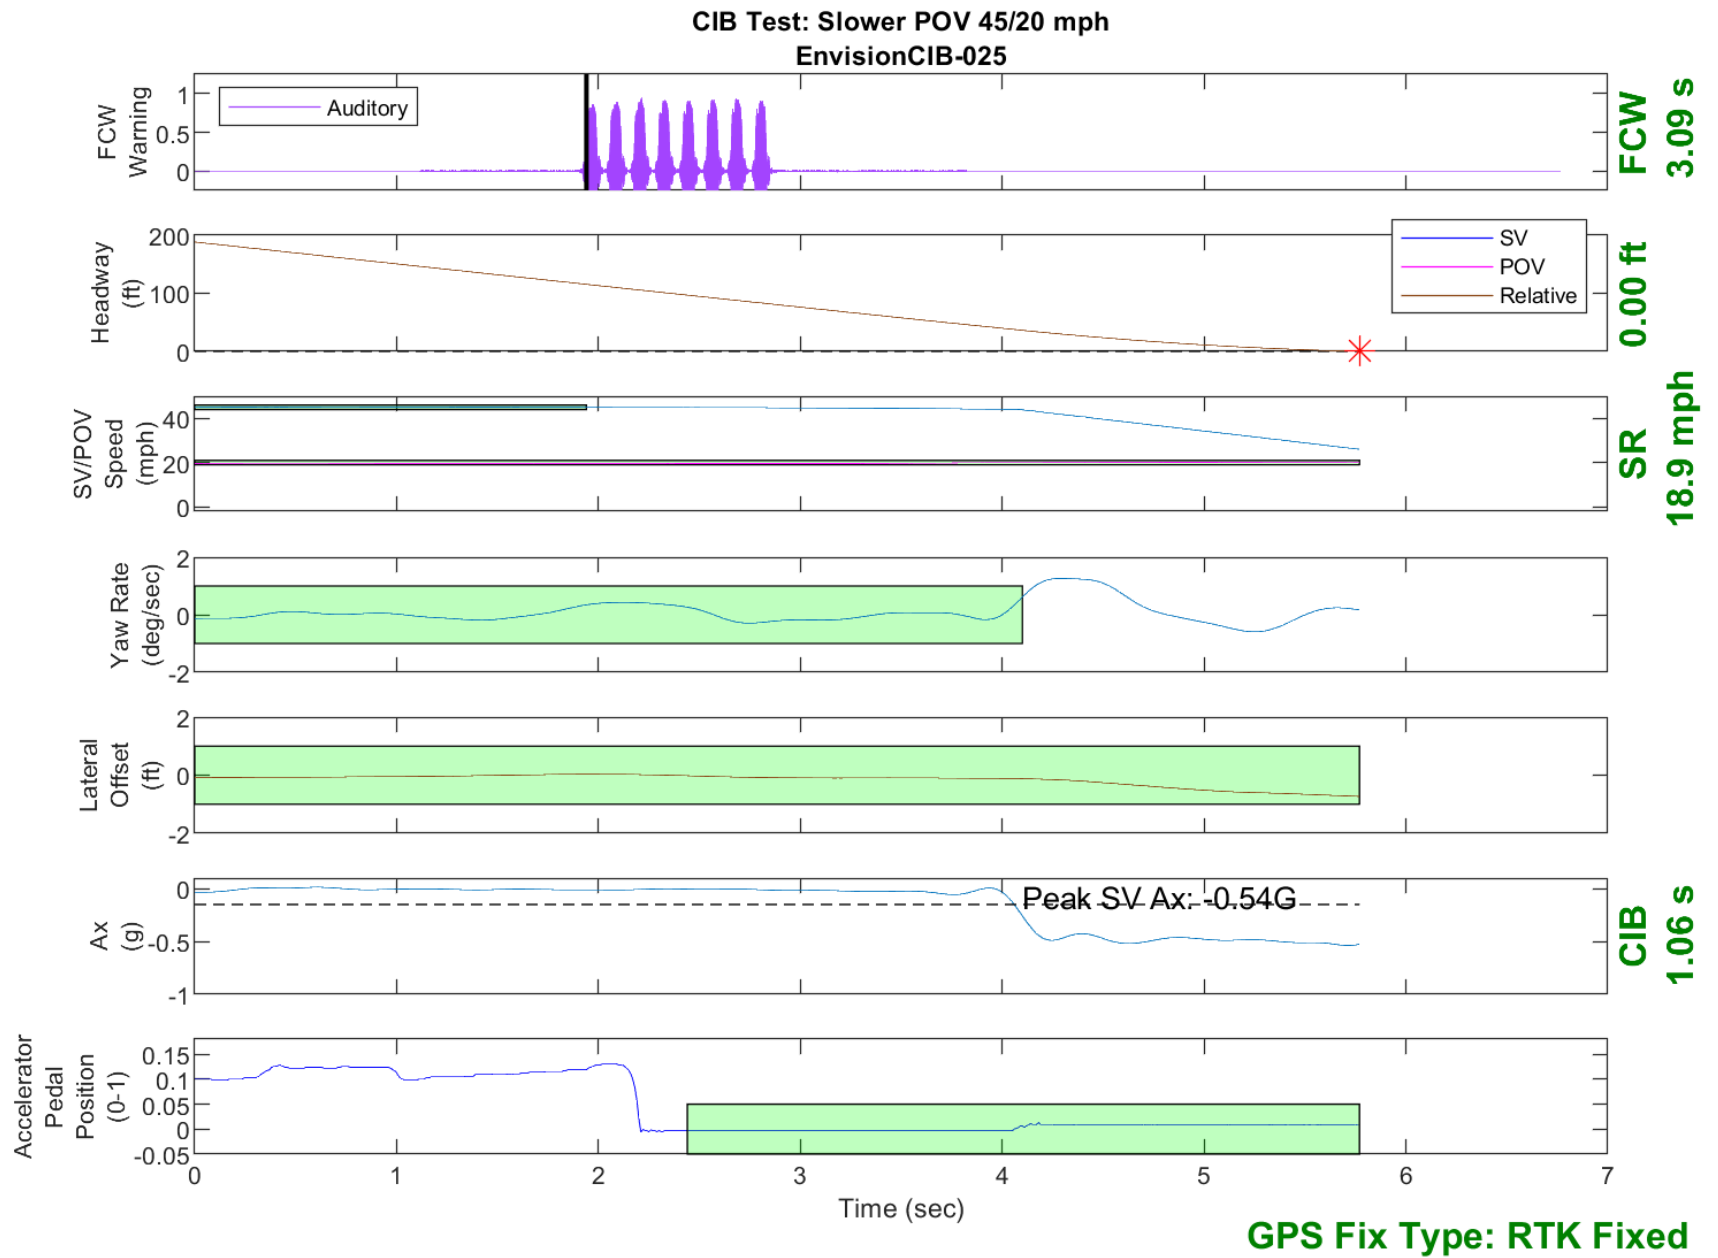


Figure D27. Time History for CIB Run 25, SV Encounters Slower POV, SV 45 mph, POV 20 mph

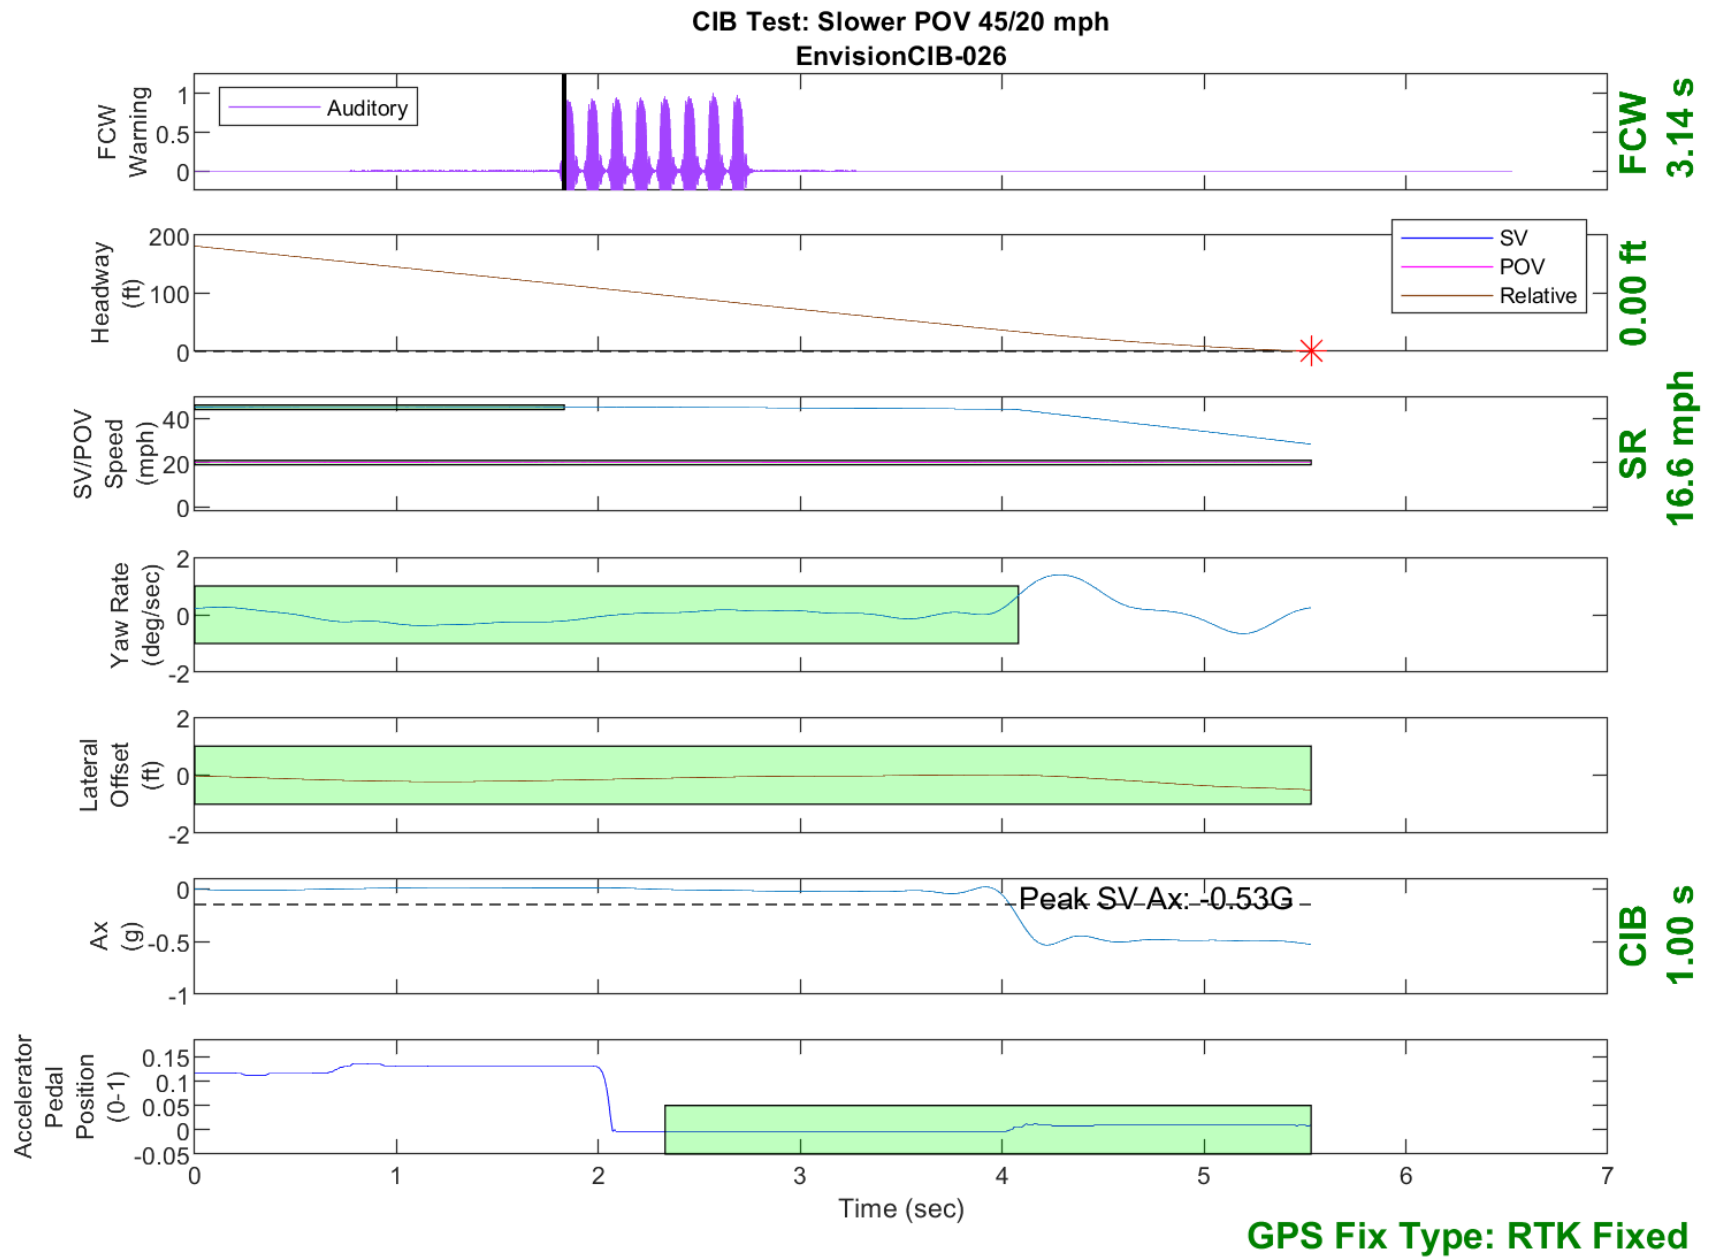


Figure D28. Time History for CIB Run 26, SV Encounters Slower POV, SV 45 mph, POV 20 mph

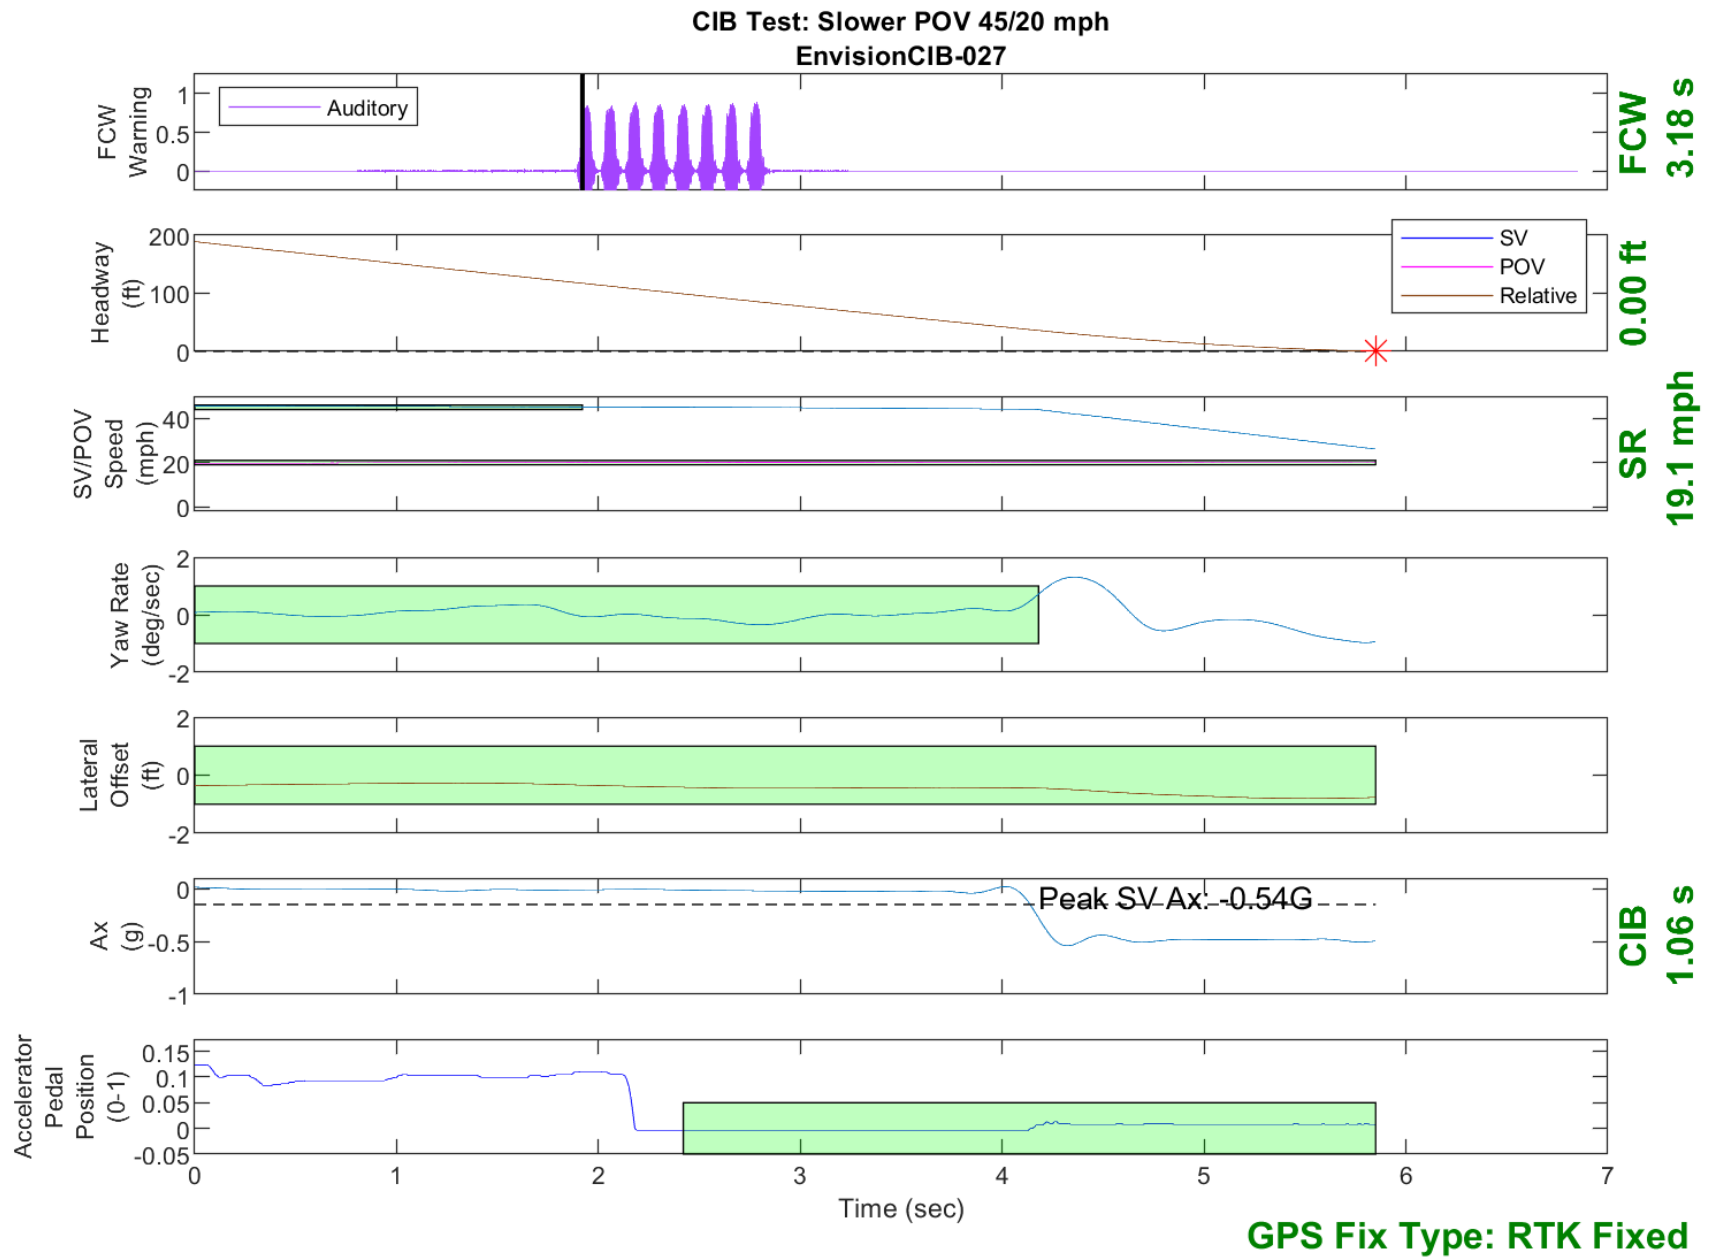


Figure D29. Time History for CIB Run 27, SV Encounters Slower POV, SV 45 mph, POV 20 mph



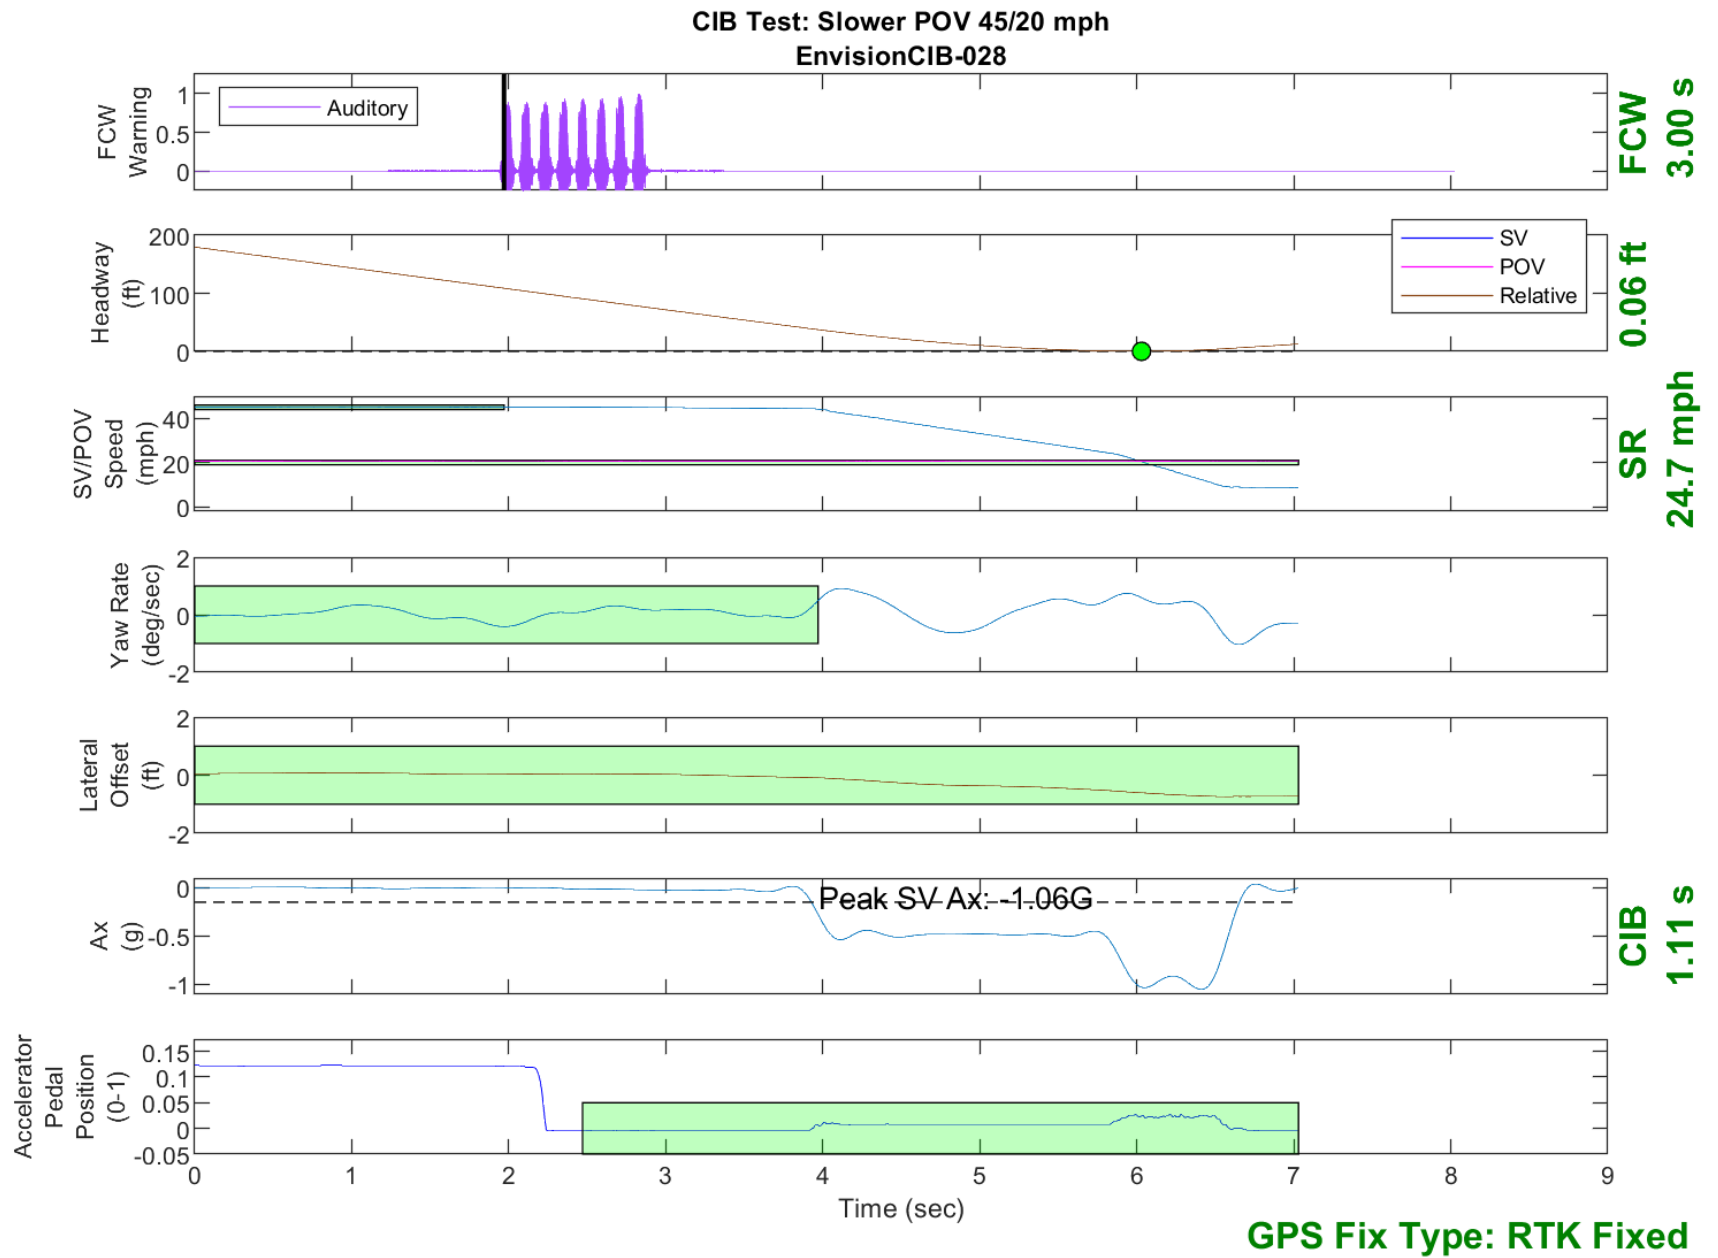


Figure D30. Time History for CIB Run 28, SV Encounters Slower POV, SV 45 mph, POV 20 mph

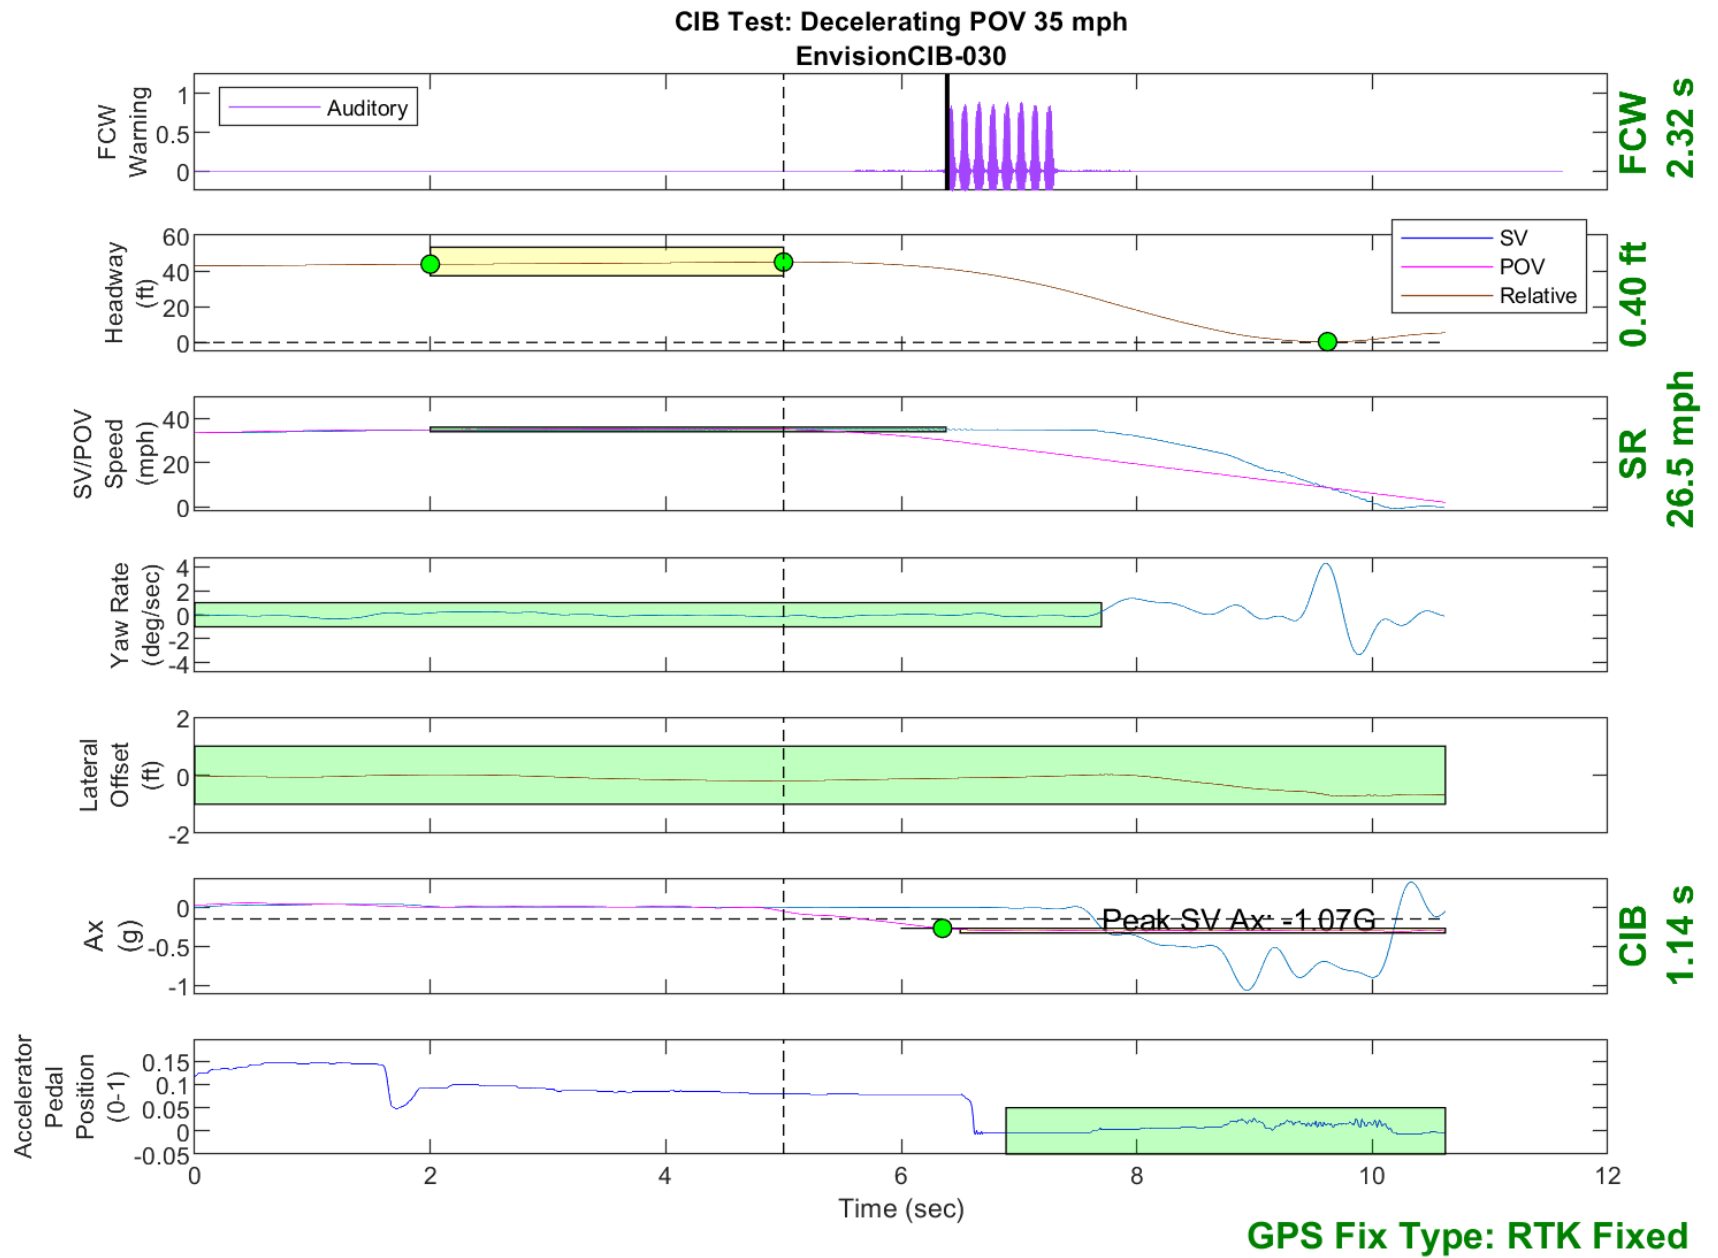


Figure D31. Time History for CIB Run 30, SV Encounters Decelerating POV, SV 35 mph, POV 35 mph

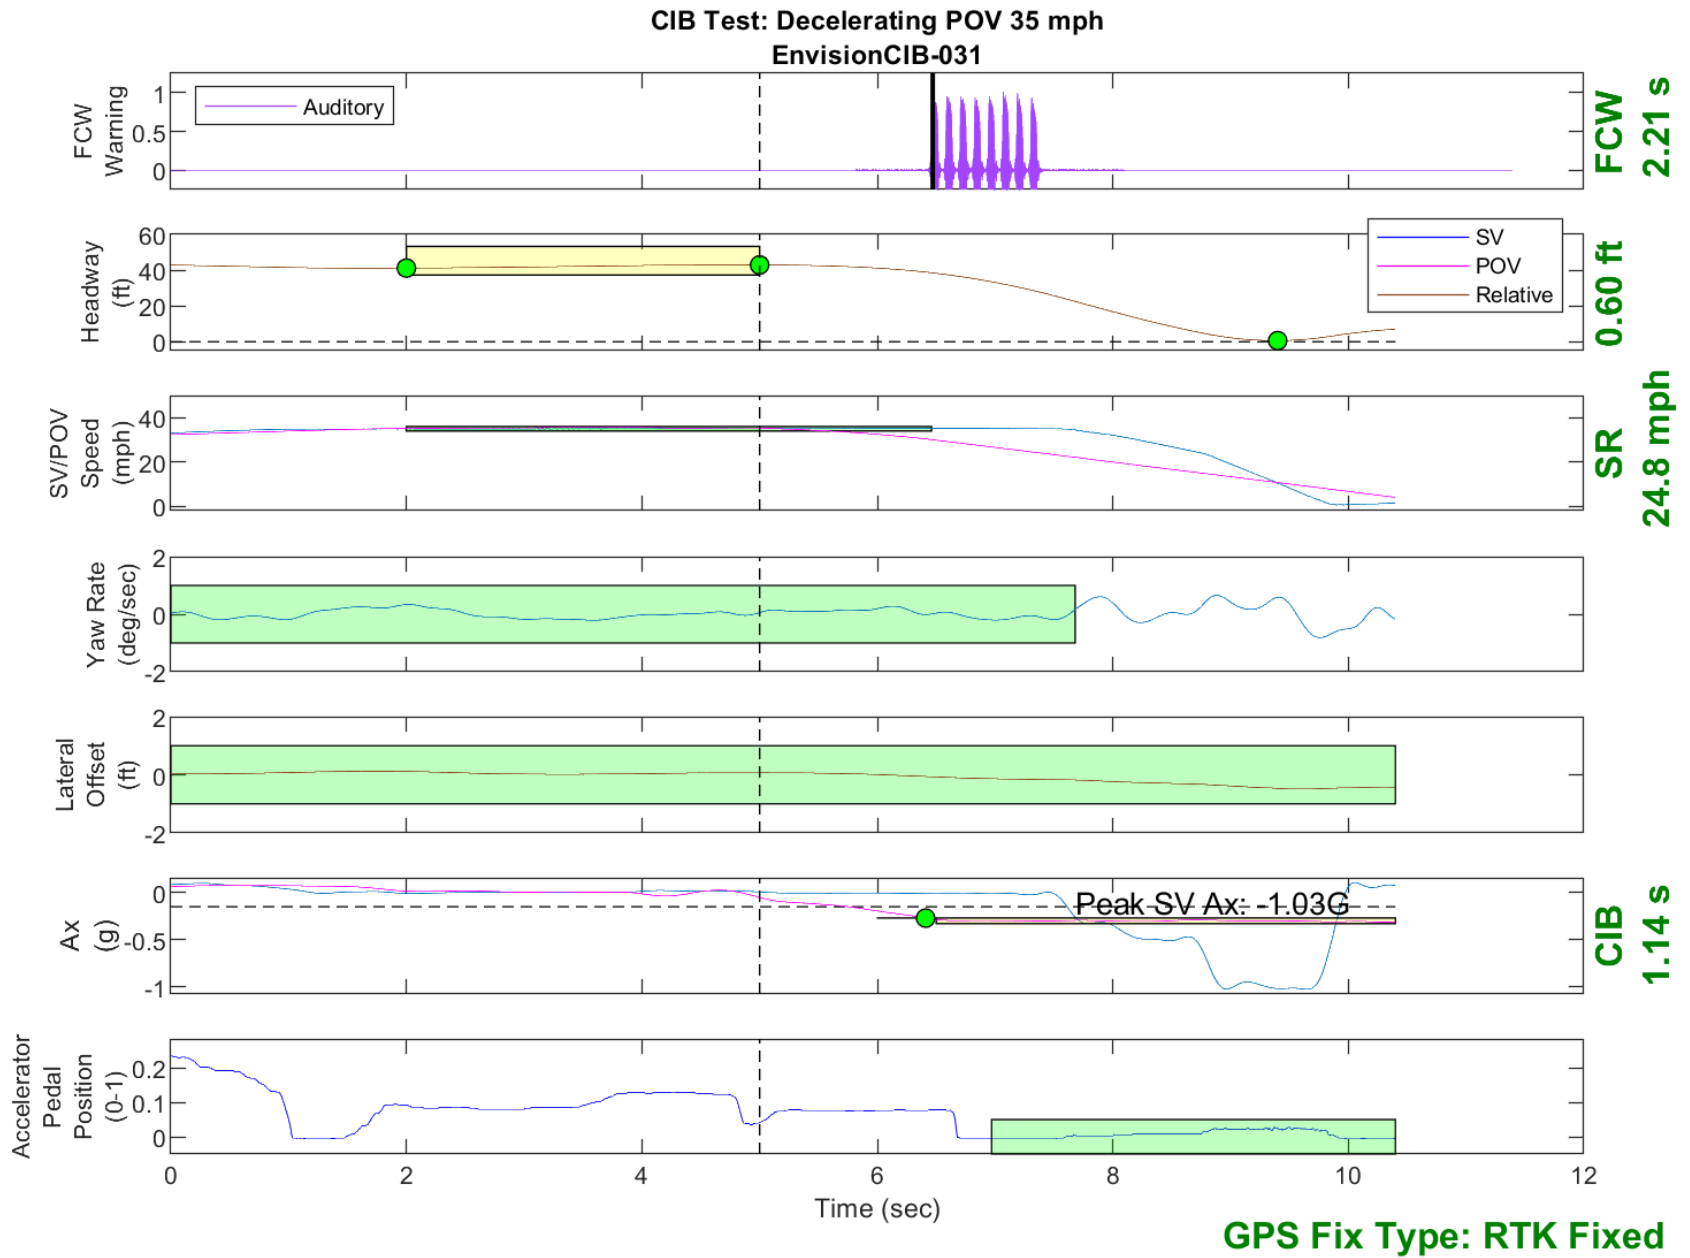


Figure D32. Time History for CIB Run 31, SV Encounters Decelerating POV, SV 35 mph, POV 35 mph

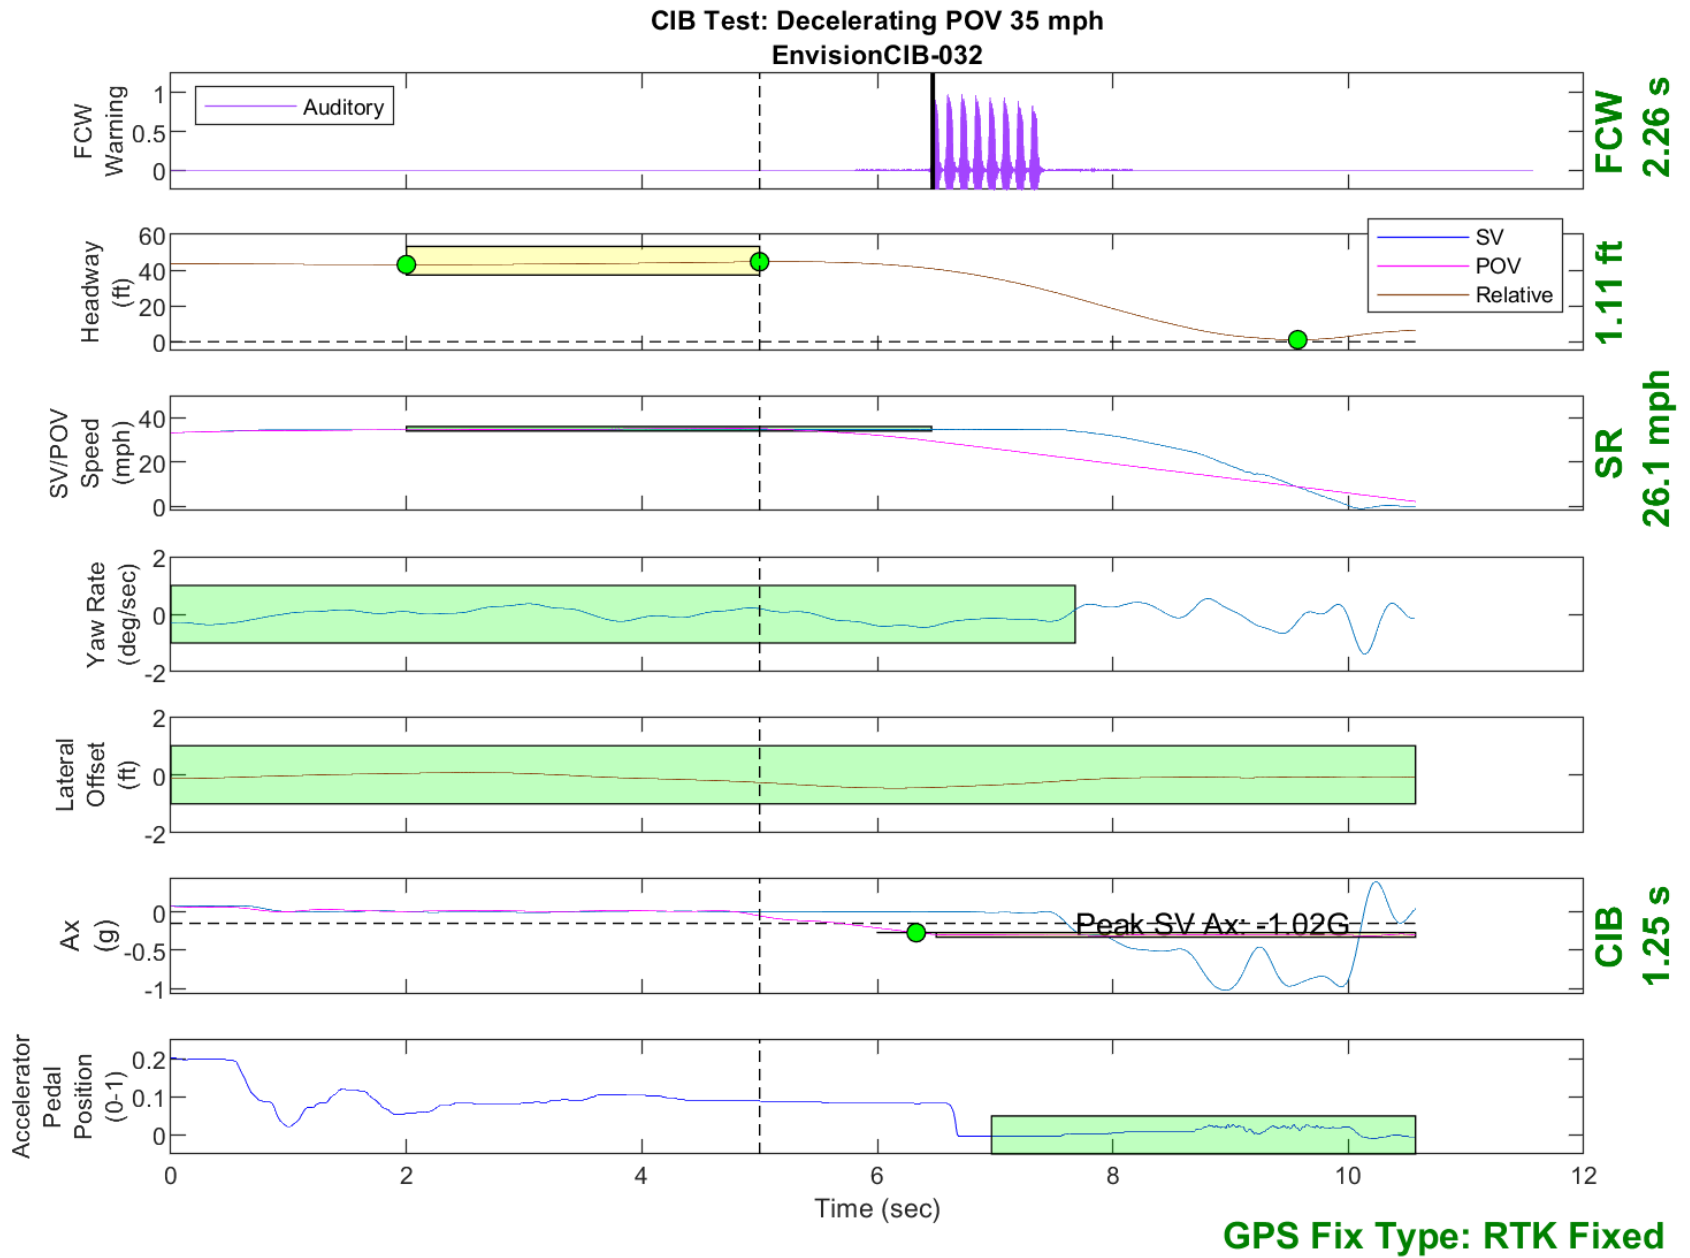


Figure D33. Time History for CIB Run 32, SV Encounters Decelerating POV, SV 35 mph, POV 35 mph

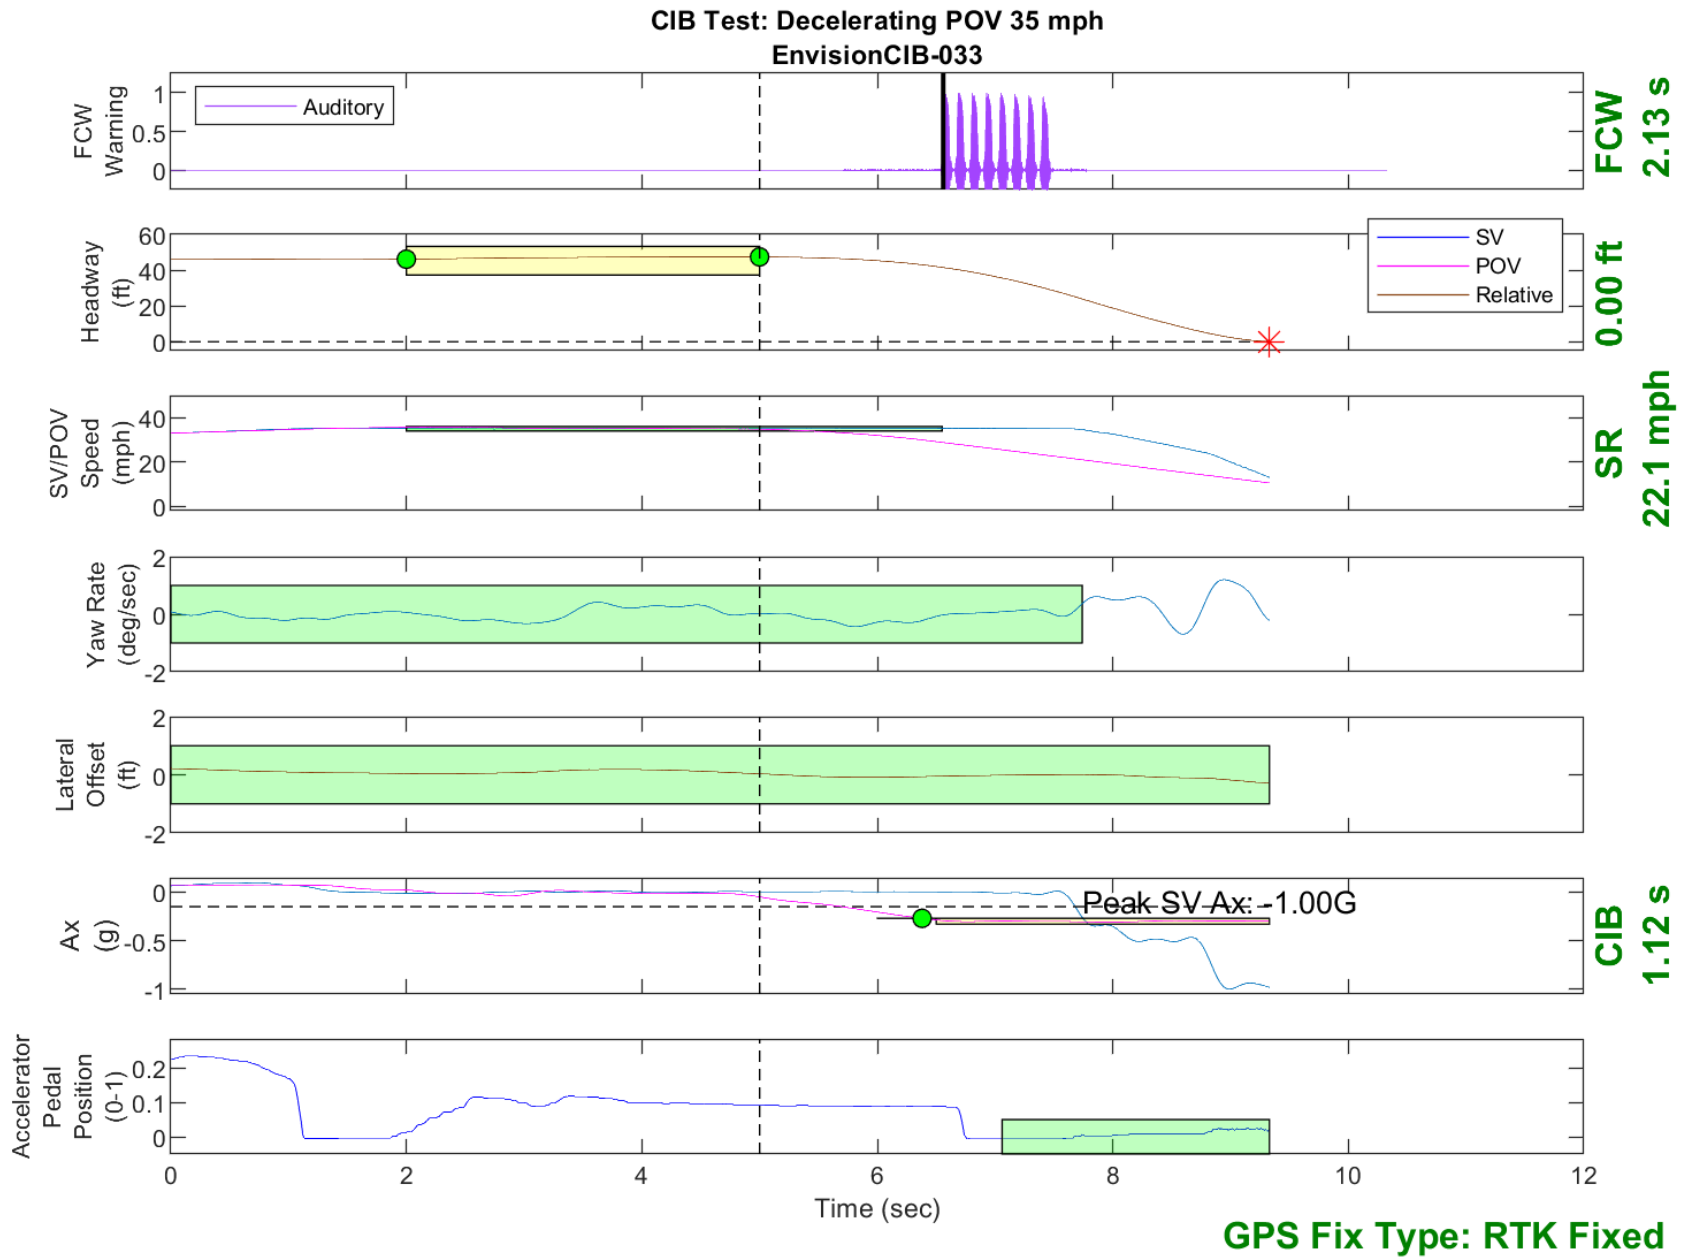


Figure D34. Time History for CIB Run 33, SV Encounters Decelerating POV, SV 35 mph, POV 35 mph

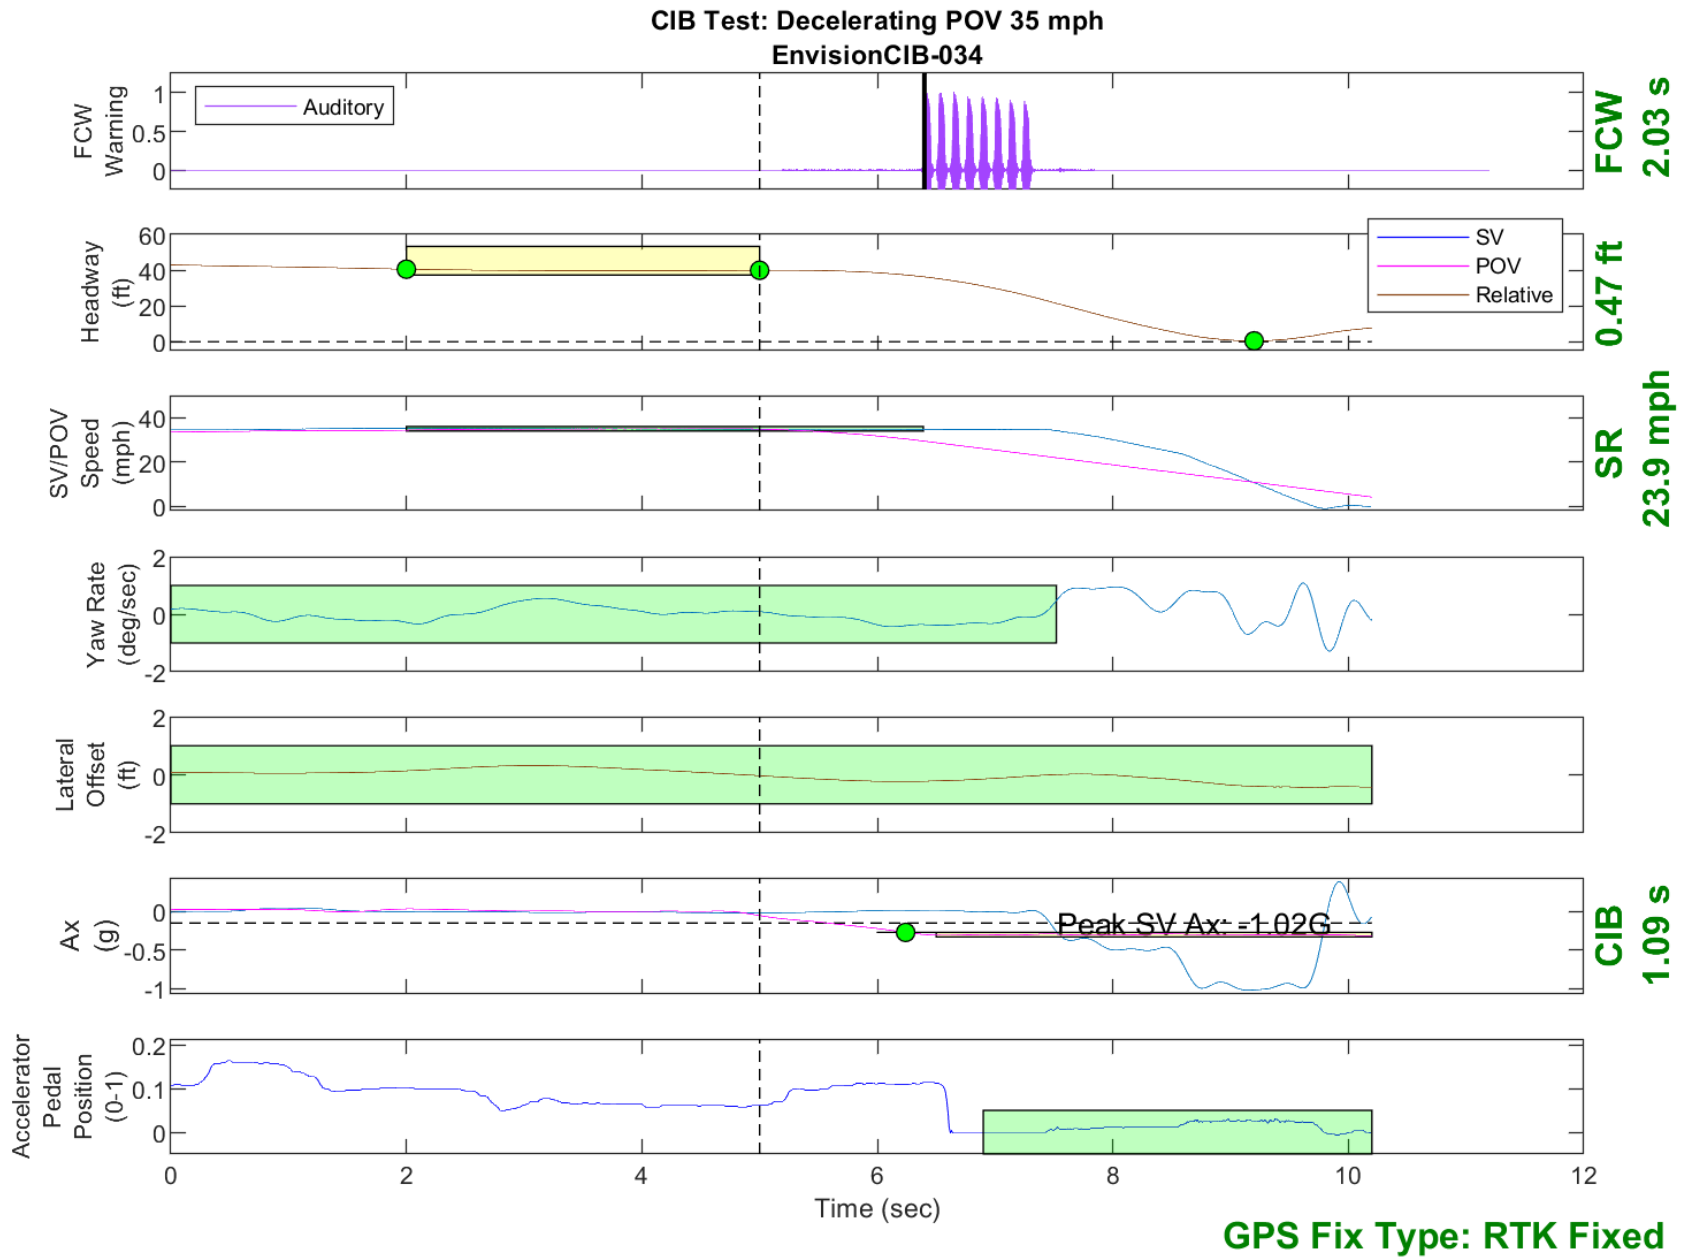


Figure D35. Time History for CIB Run 34, SV Encounters Decelerating POV, SV 35 mph, POV 35 mph

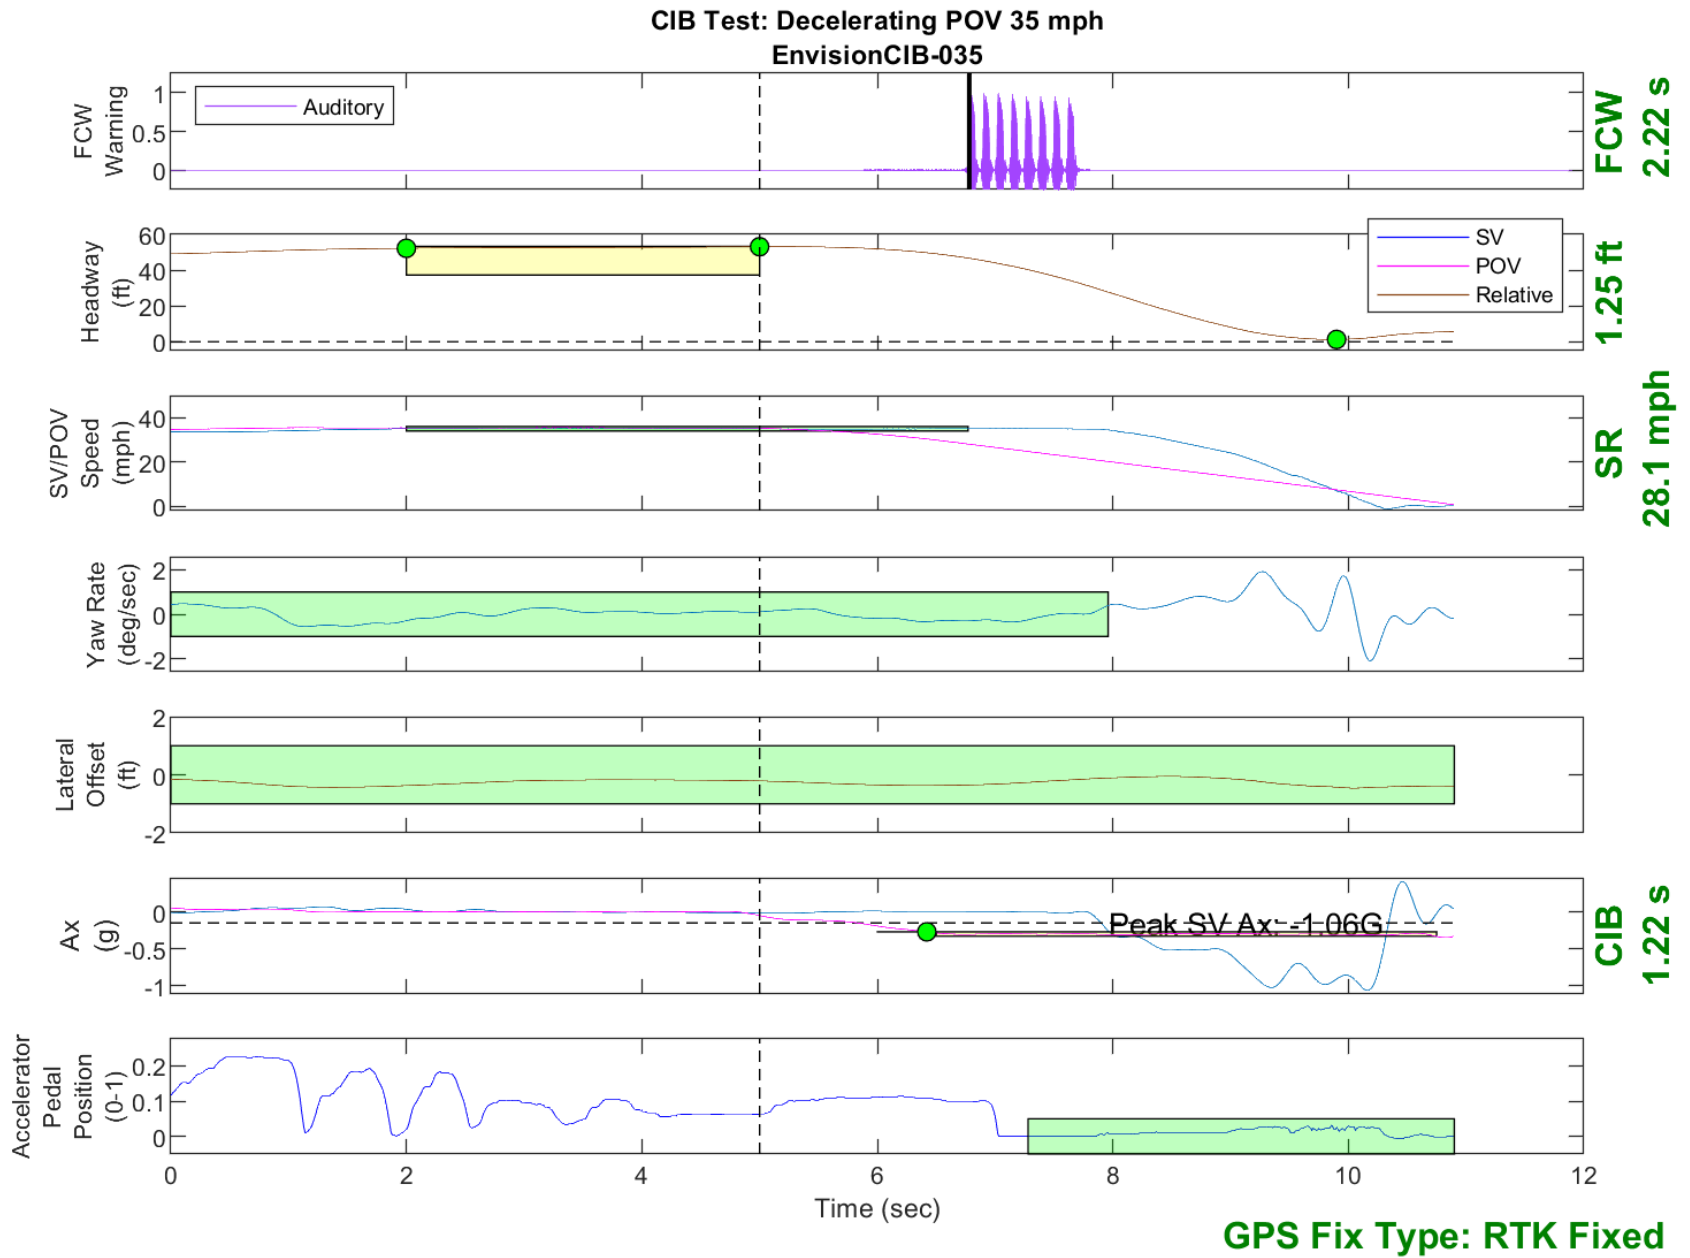


Figure D36. Time History for CIB Run 35, SV Encounters Decelerating POV, SV 35 mph, POV 35 mph

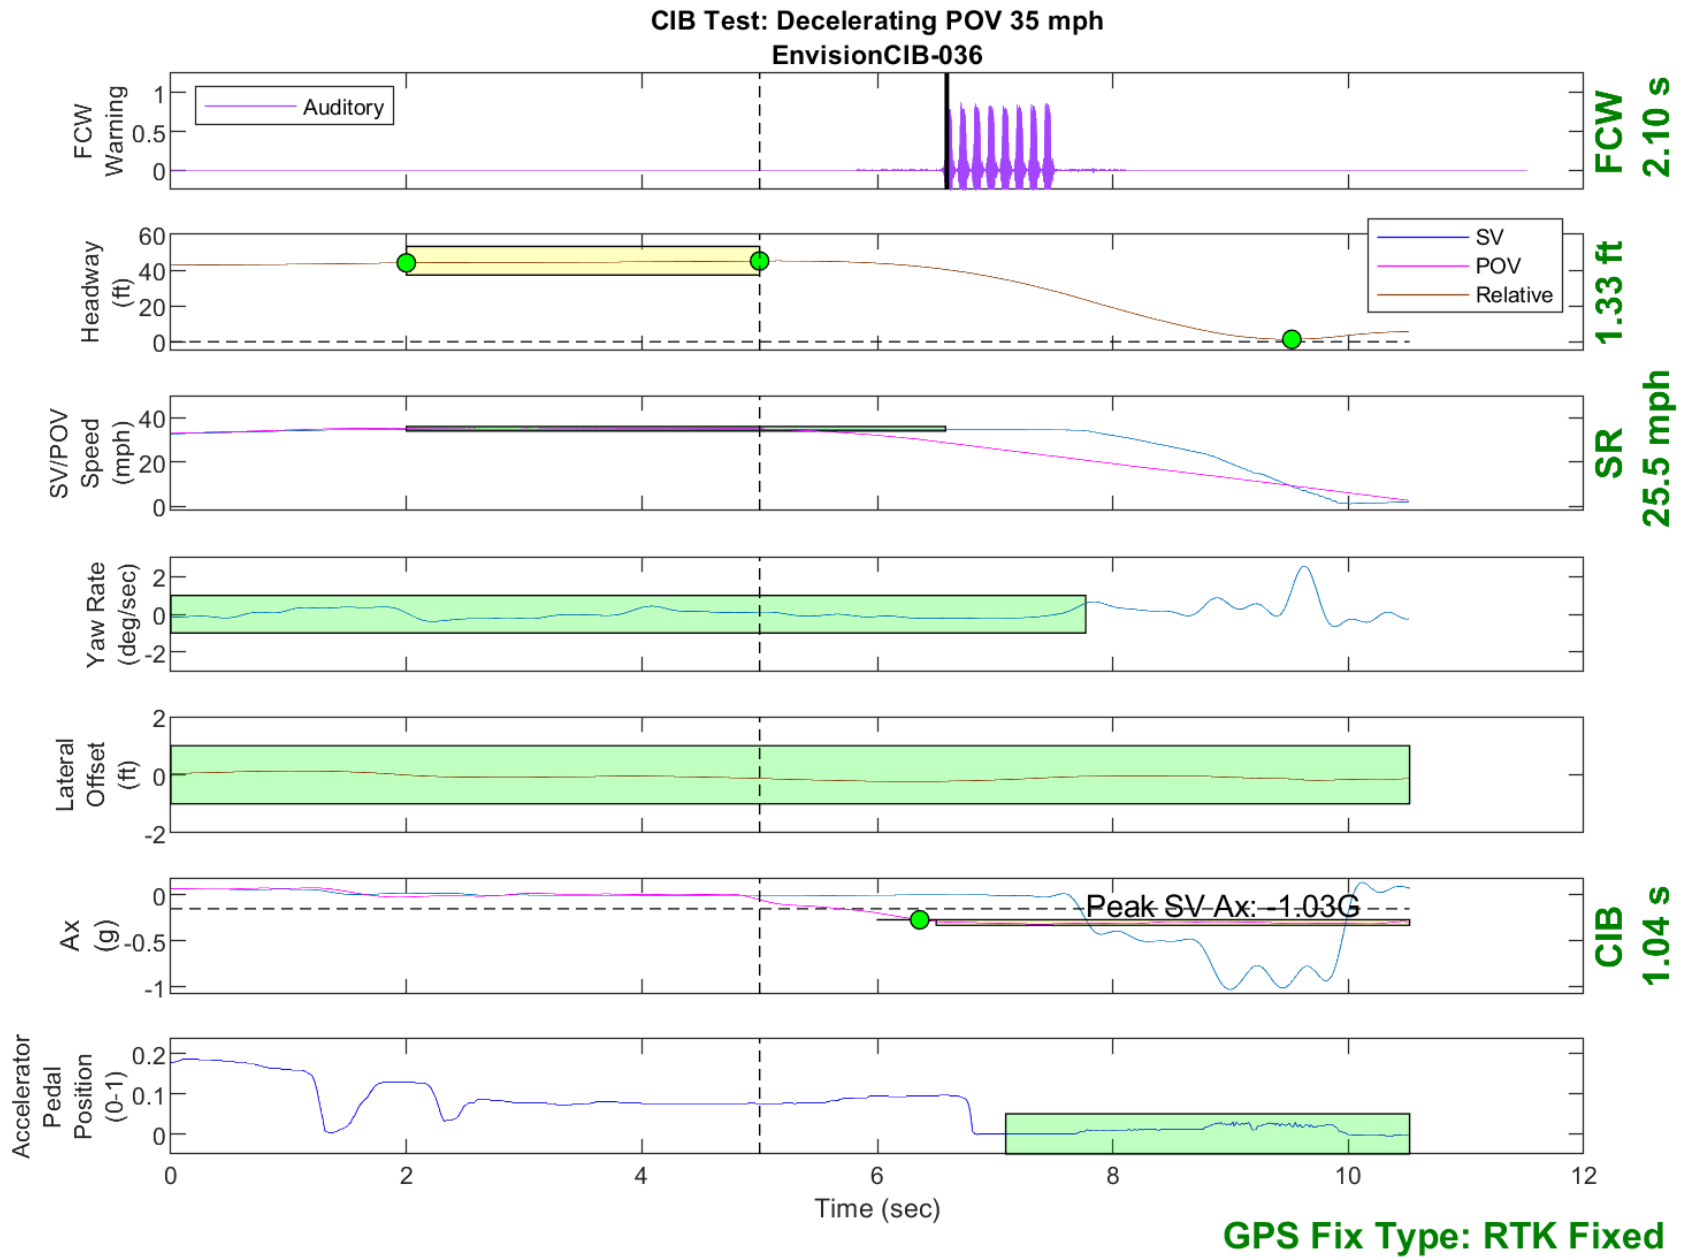


Figure D37. Time History for CIB Run 36, SV Encounters Decelerating POV, SV 35 mph, POV 35 mph



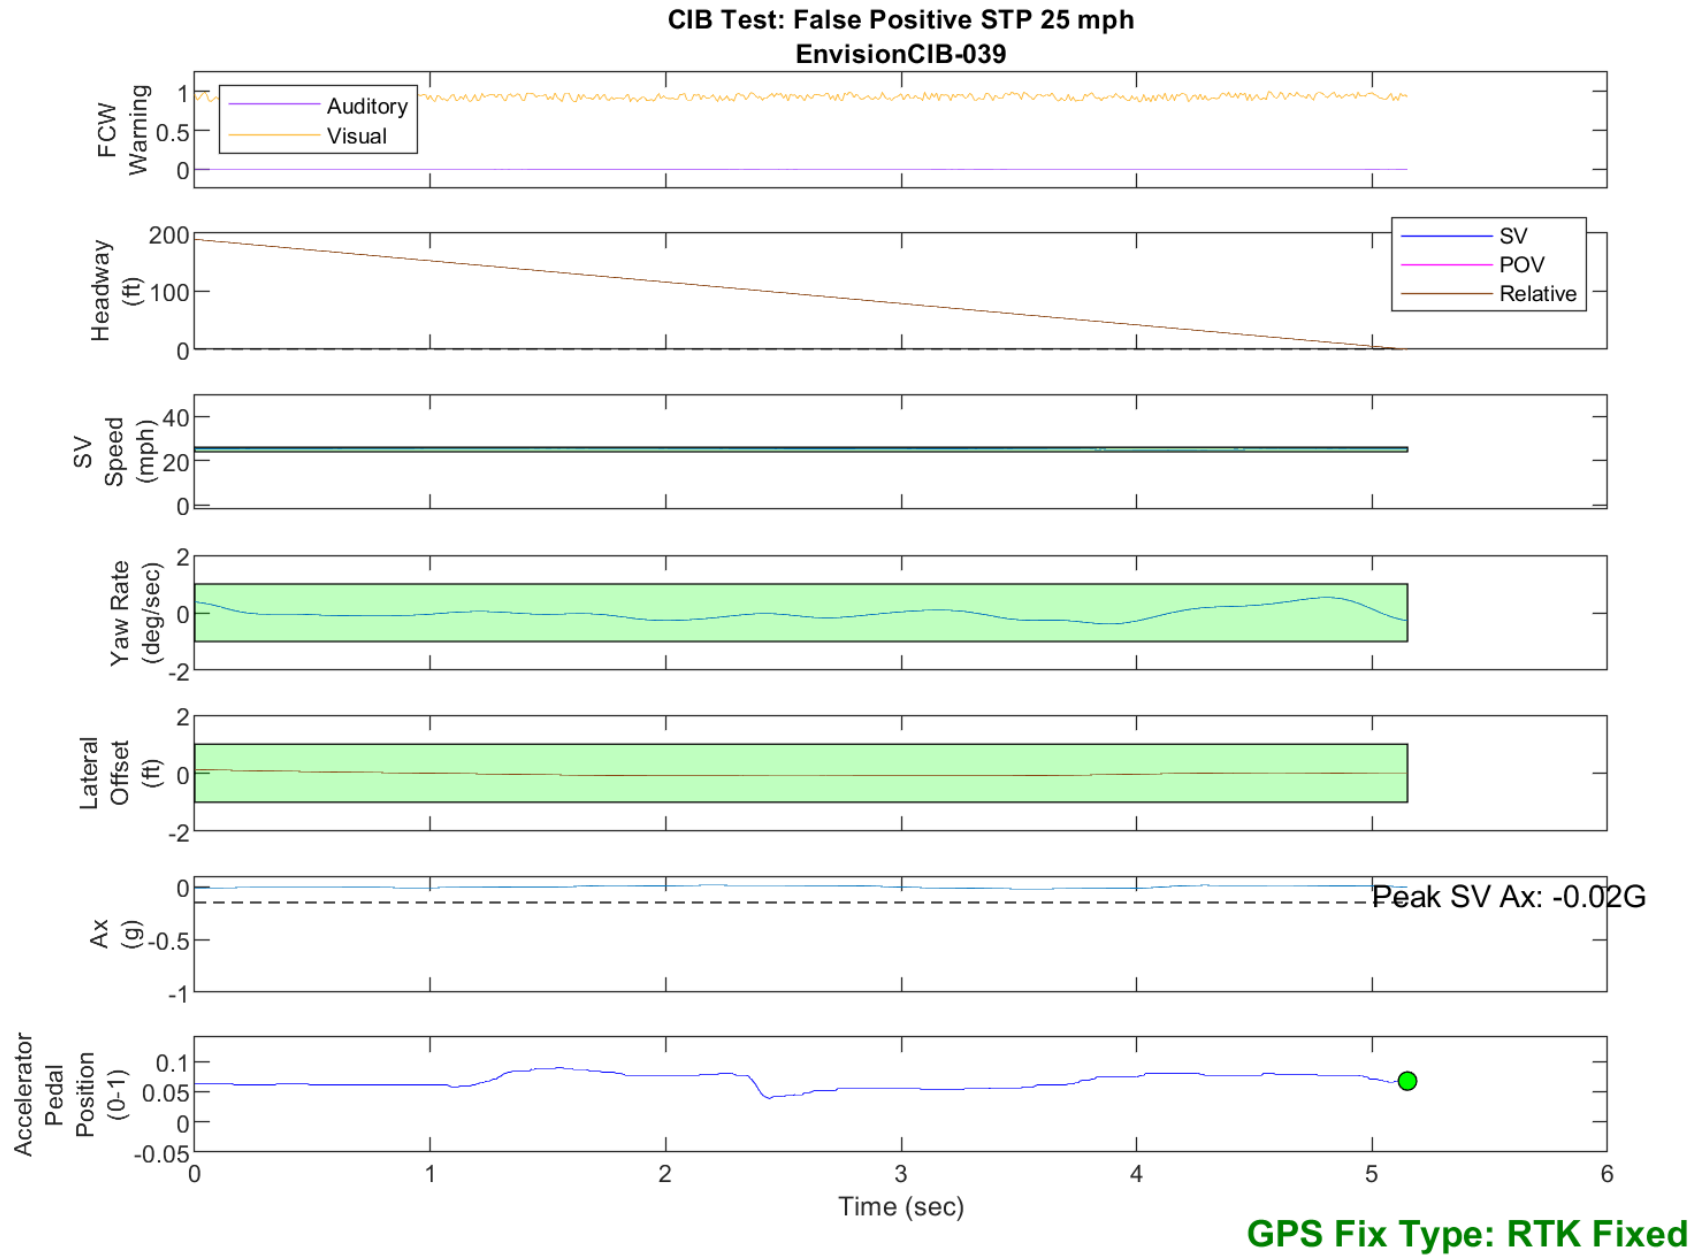


Figure D38. Time History for CIB Run 39, SV Encounters Steel Trench Plate, SV 25 mph

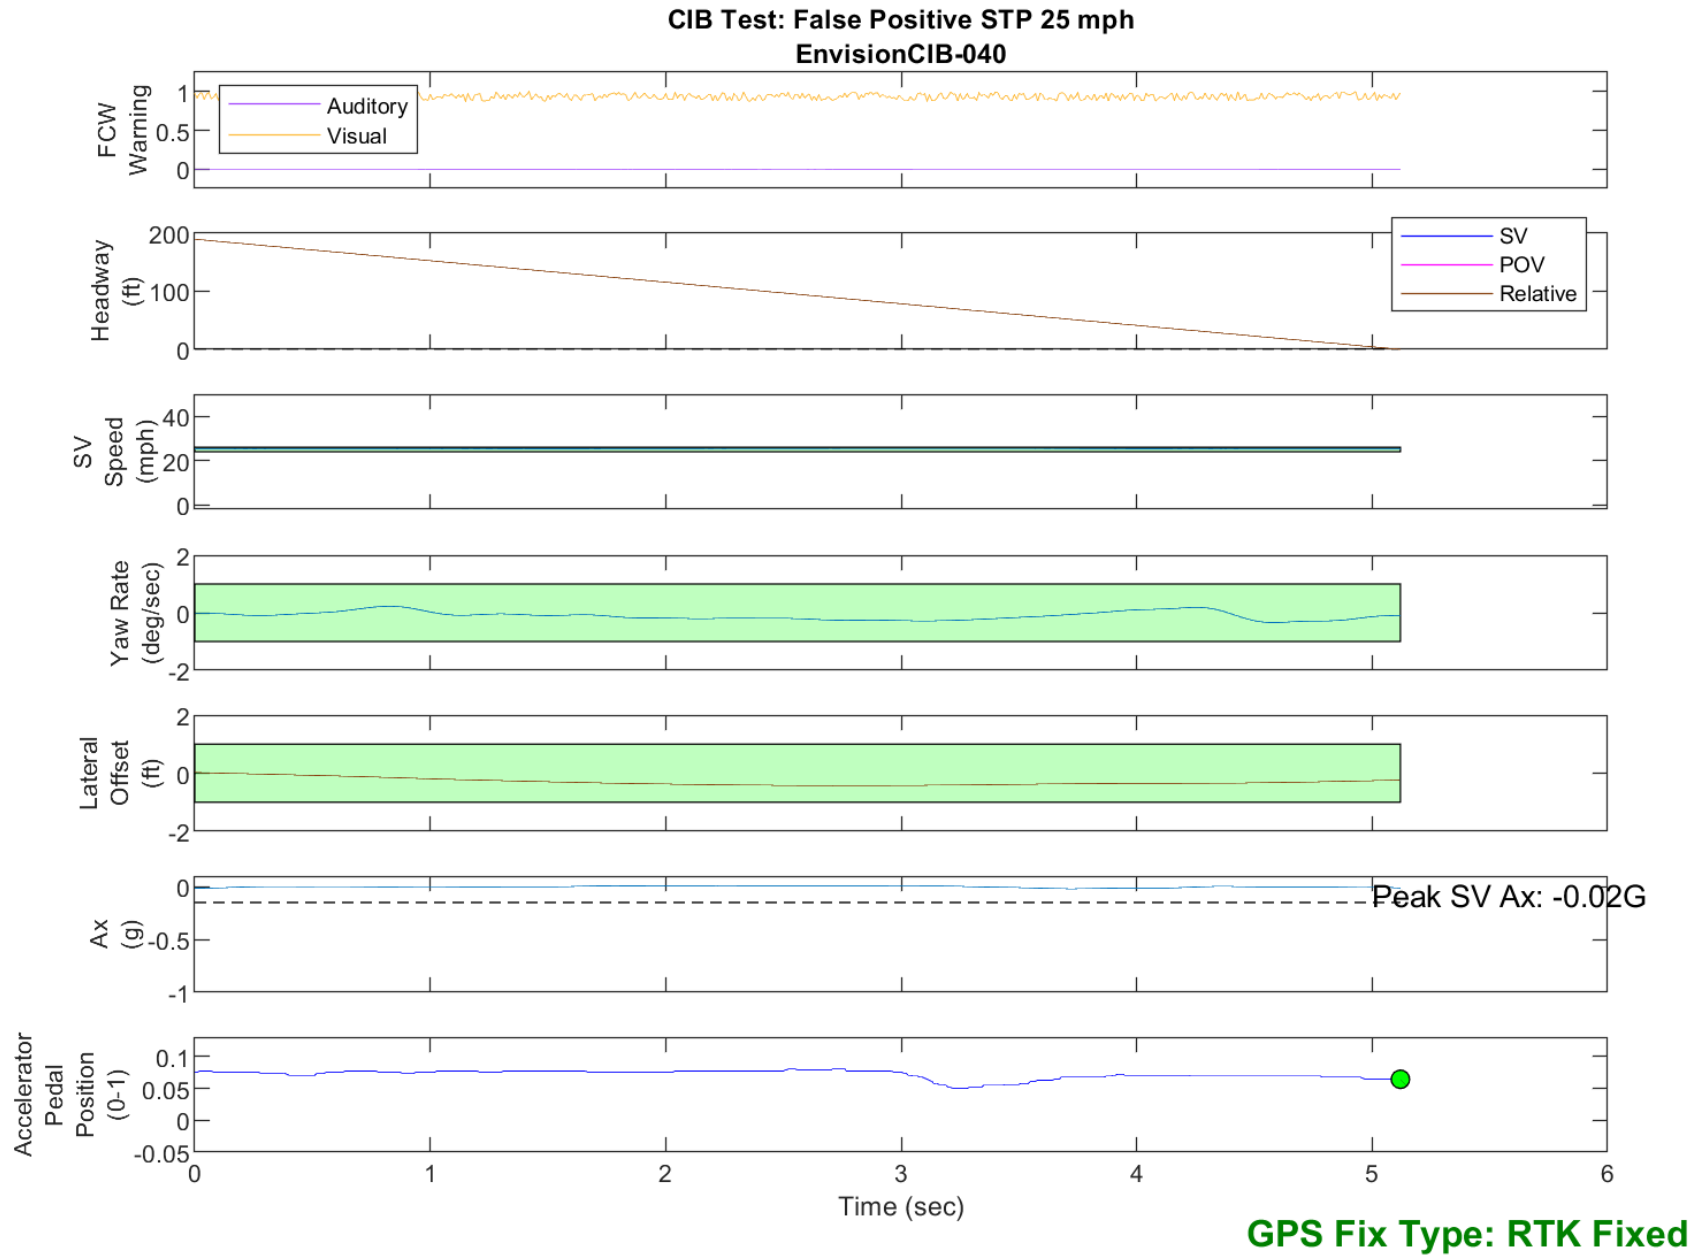


Figure D39. Time History for CIB Run 40, SV Encounters Steel Trench Plate, SV 25 mph

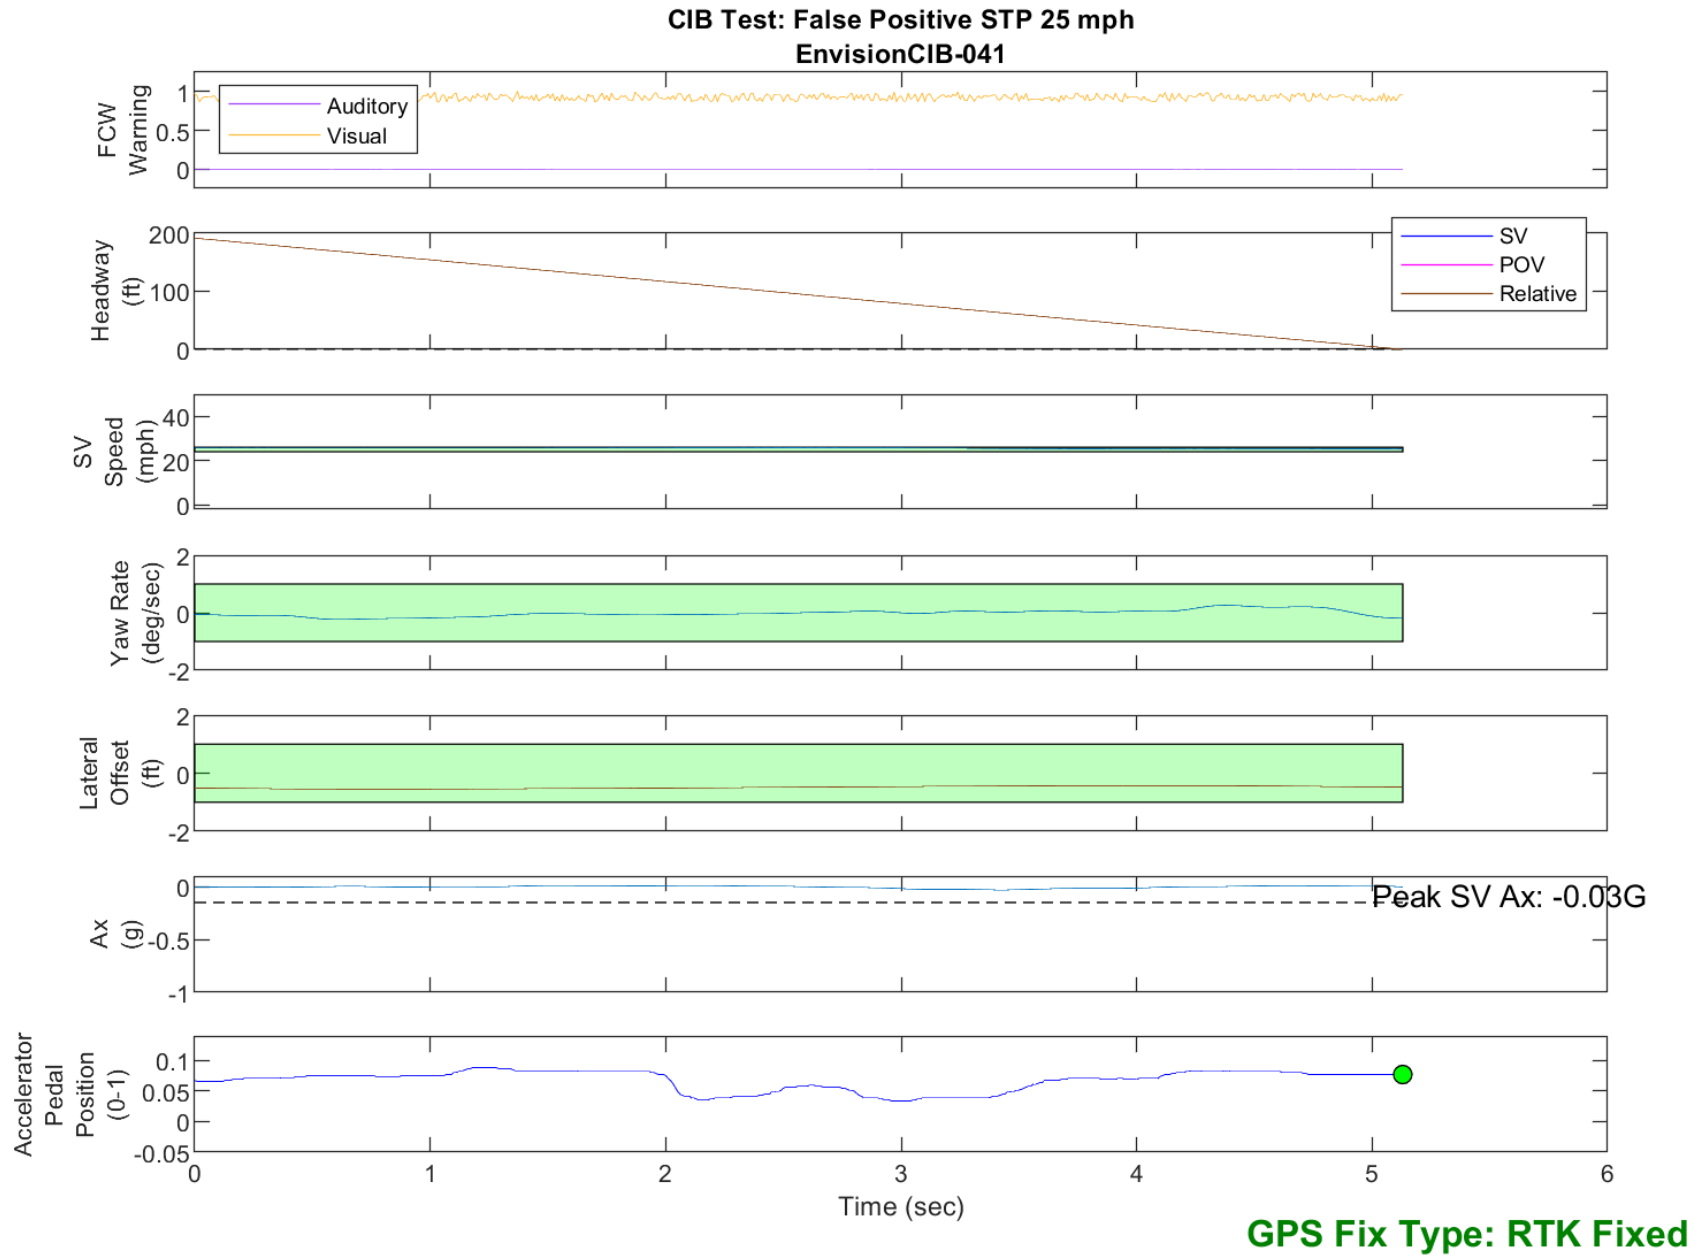


Figure D40. Time History for CIB Run 41, SV Encounters Steel Trench Plate, SV 25 mph

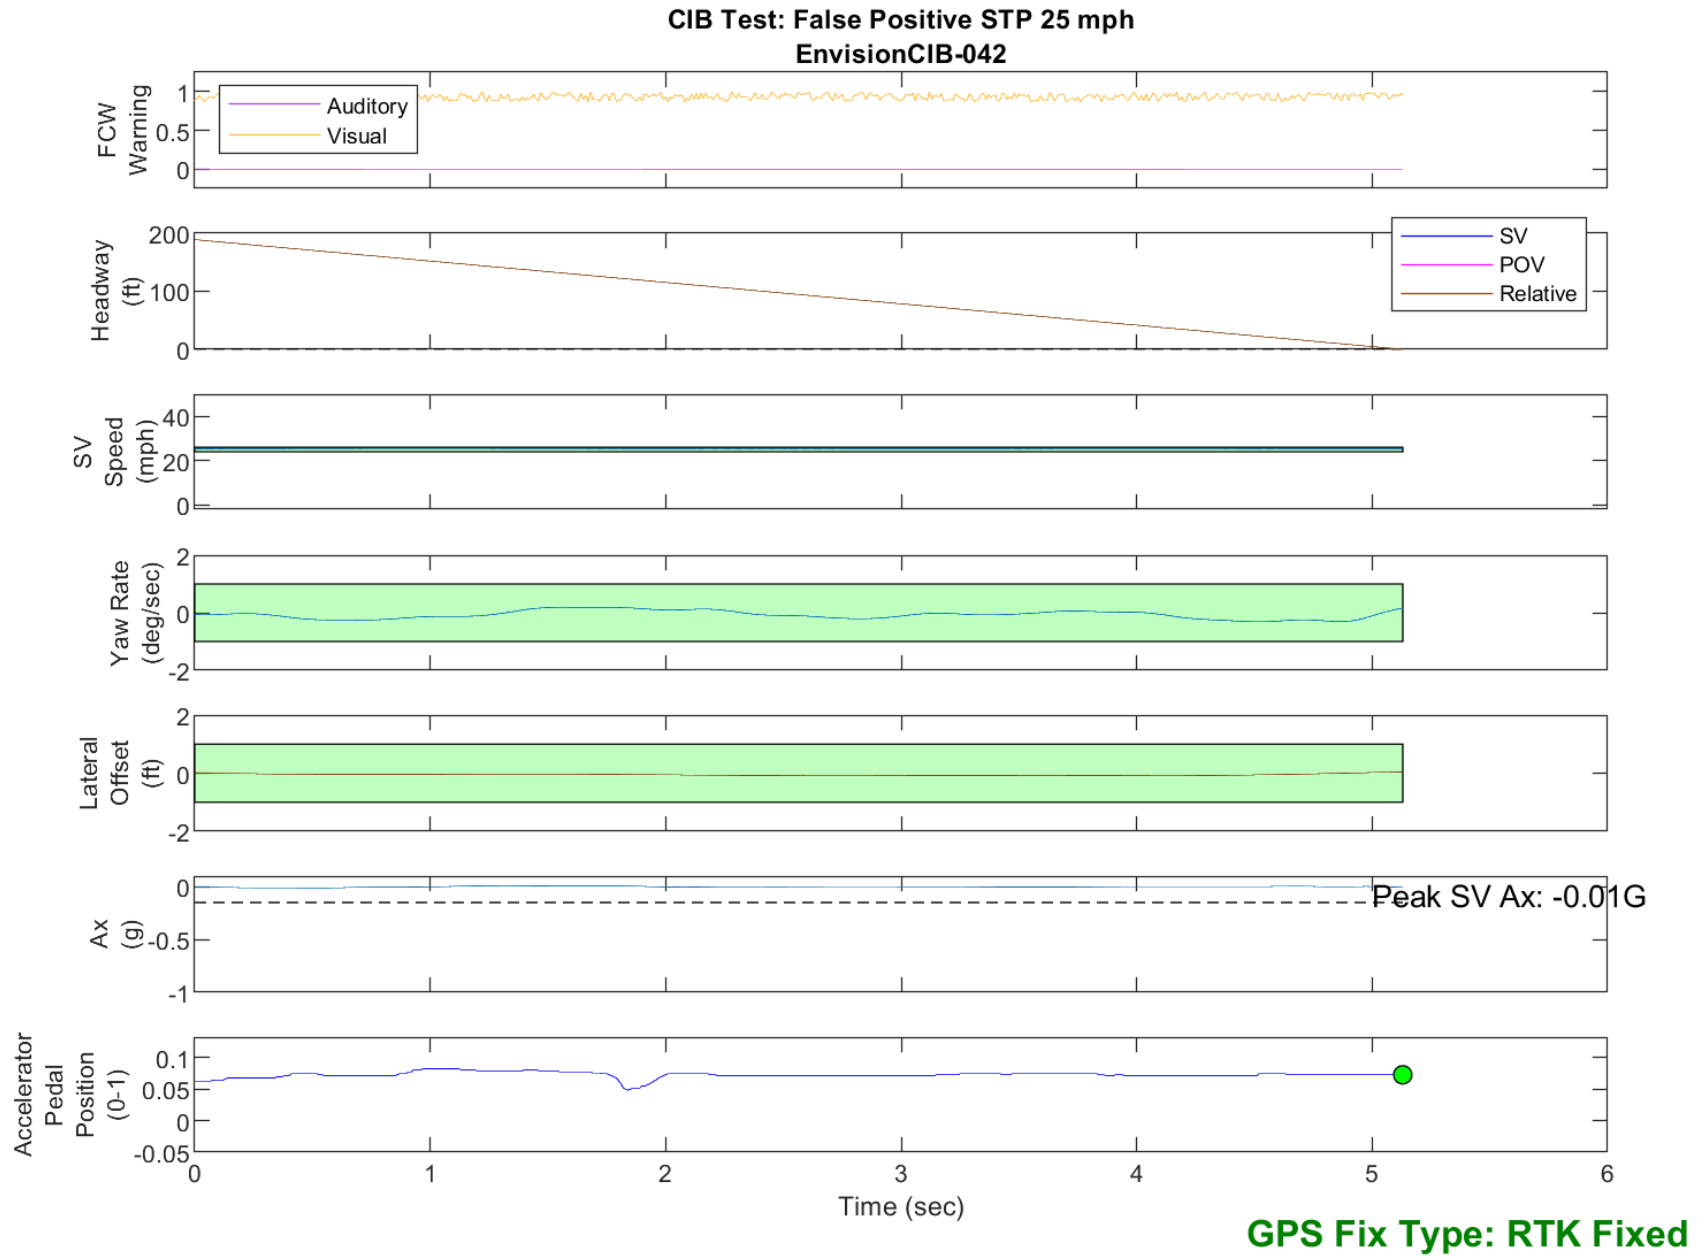


Figure D41. Time History for CIB Run 42, SV Encounters Steel Trench Plate, SV 25 mph

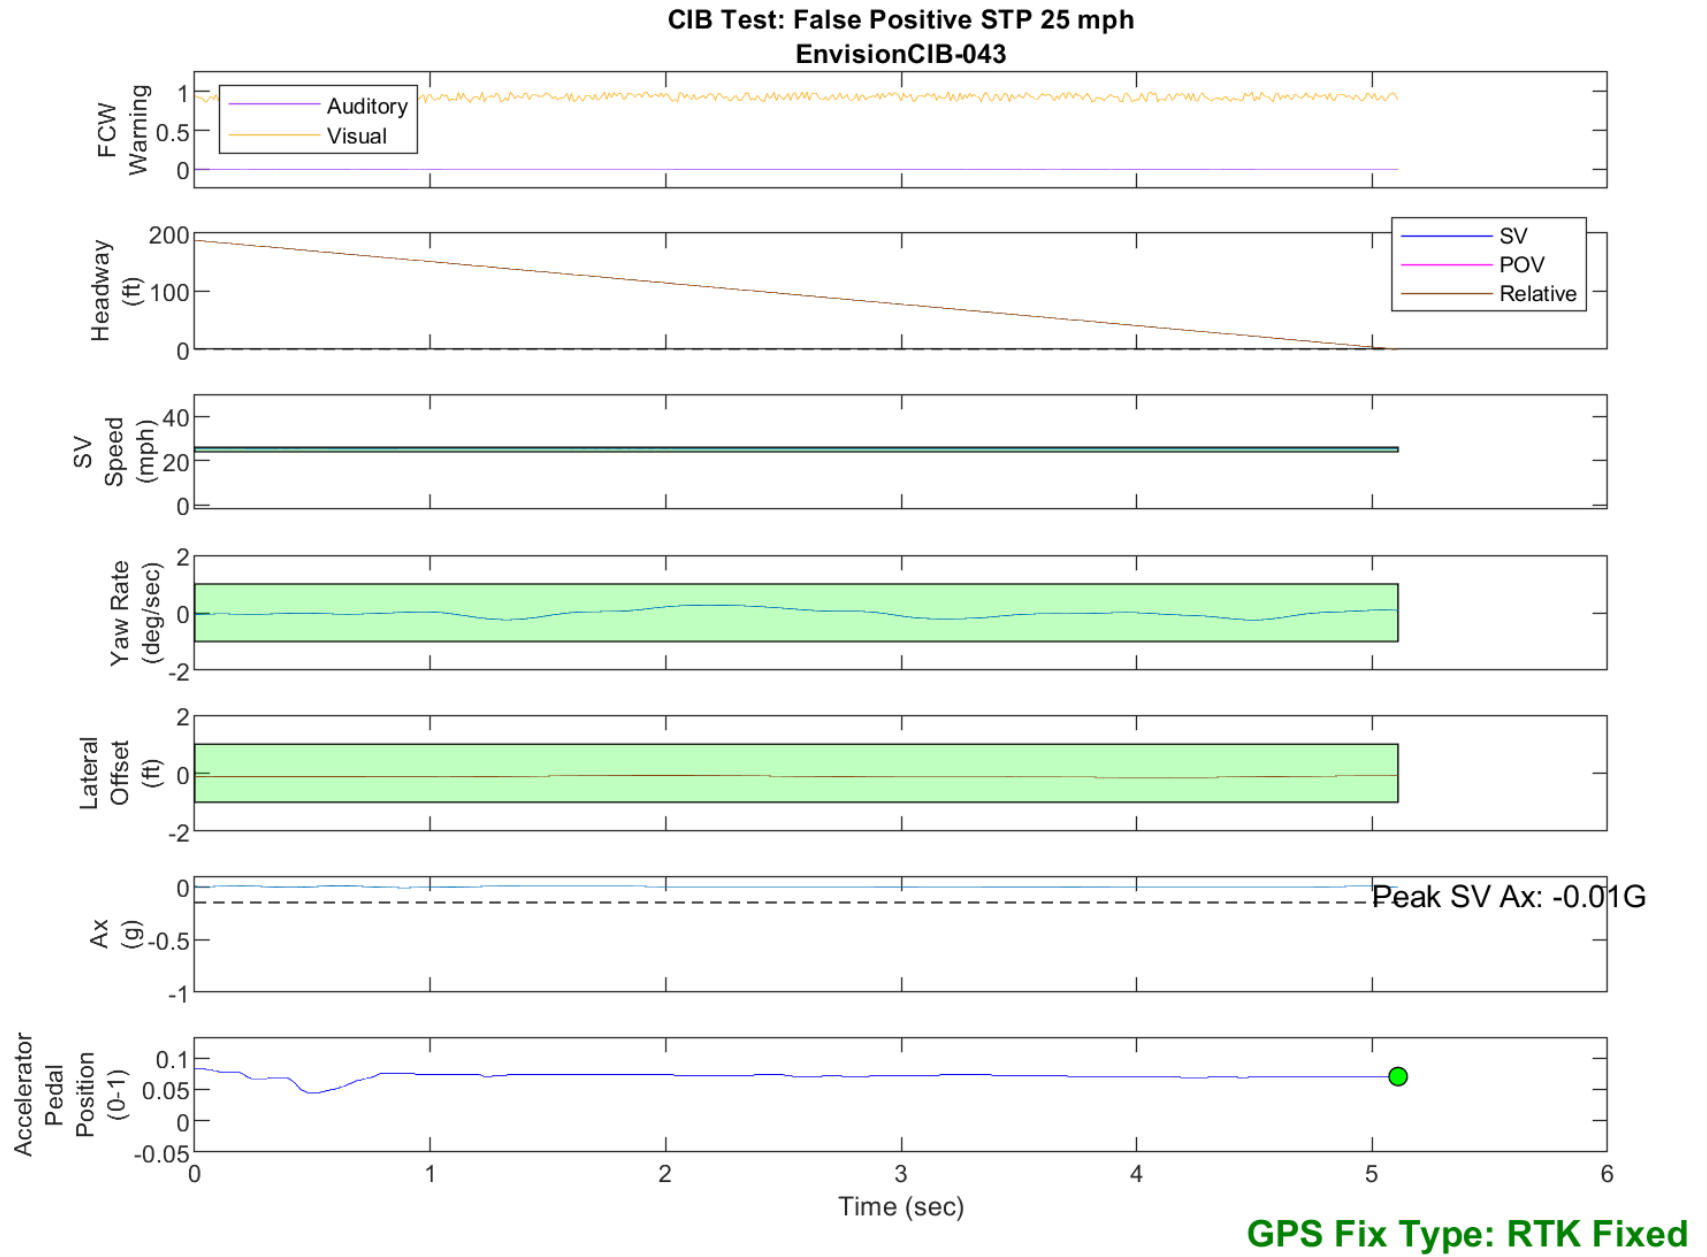


Figure D42. Time History for CIB Run 43, SV Encounters Steel Trench Plate, SV 25 mph

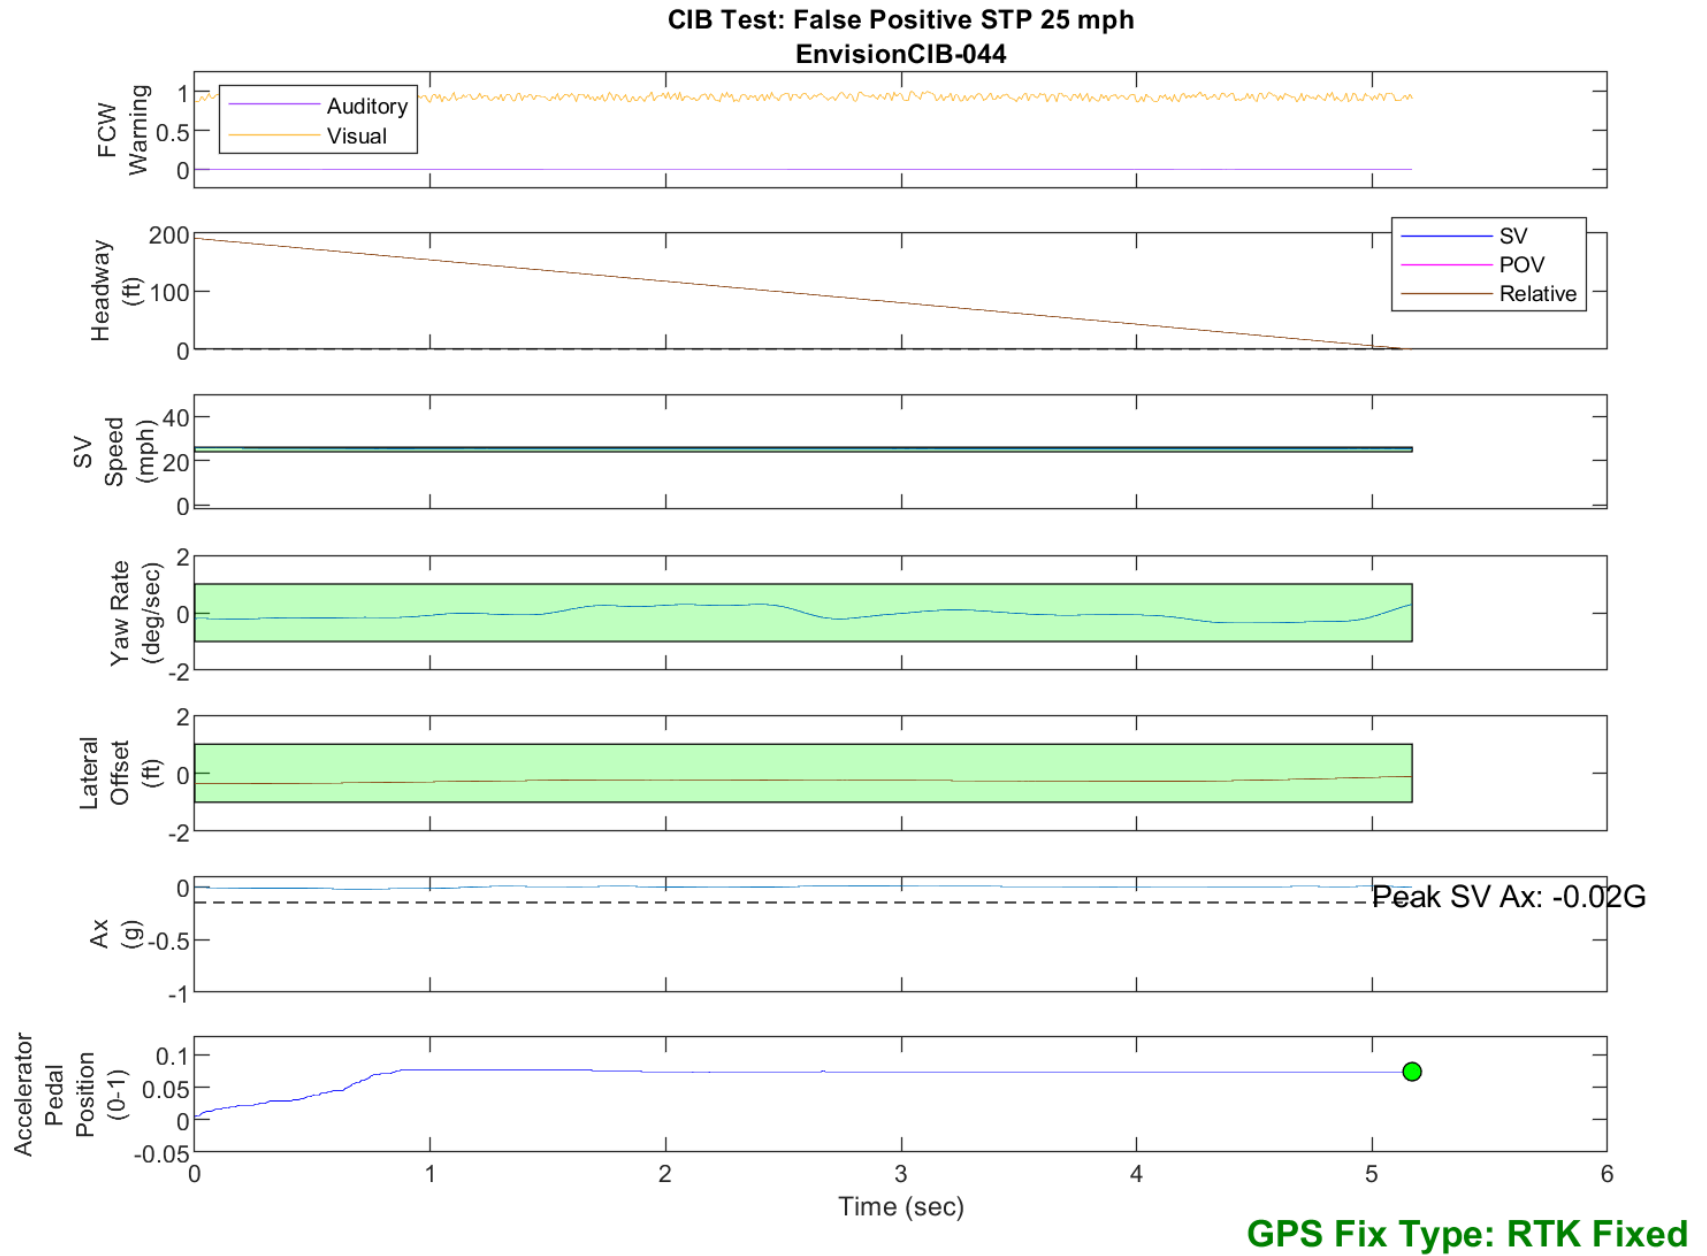


Figure D43. Time History for CIB Run 44, SV Encounters Steel Trench Plate, SV 25 mph

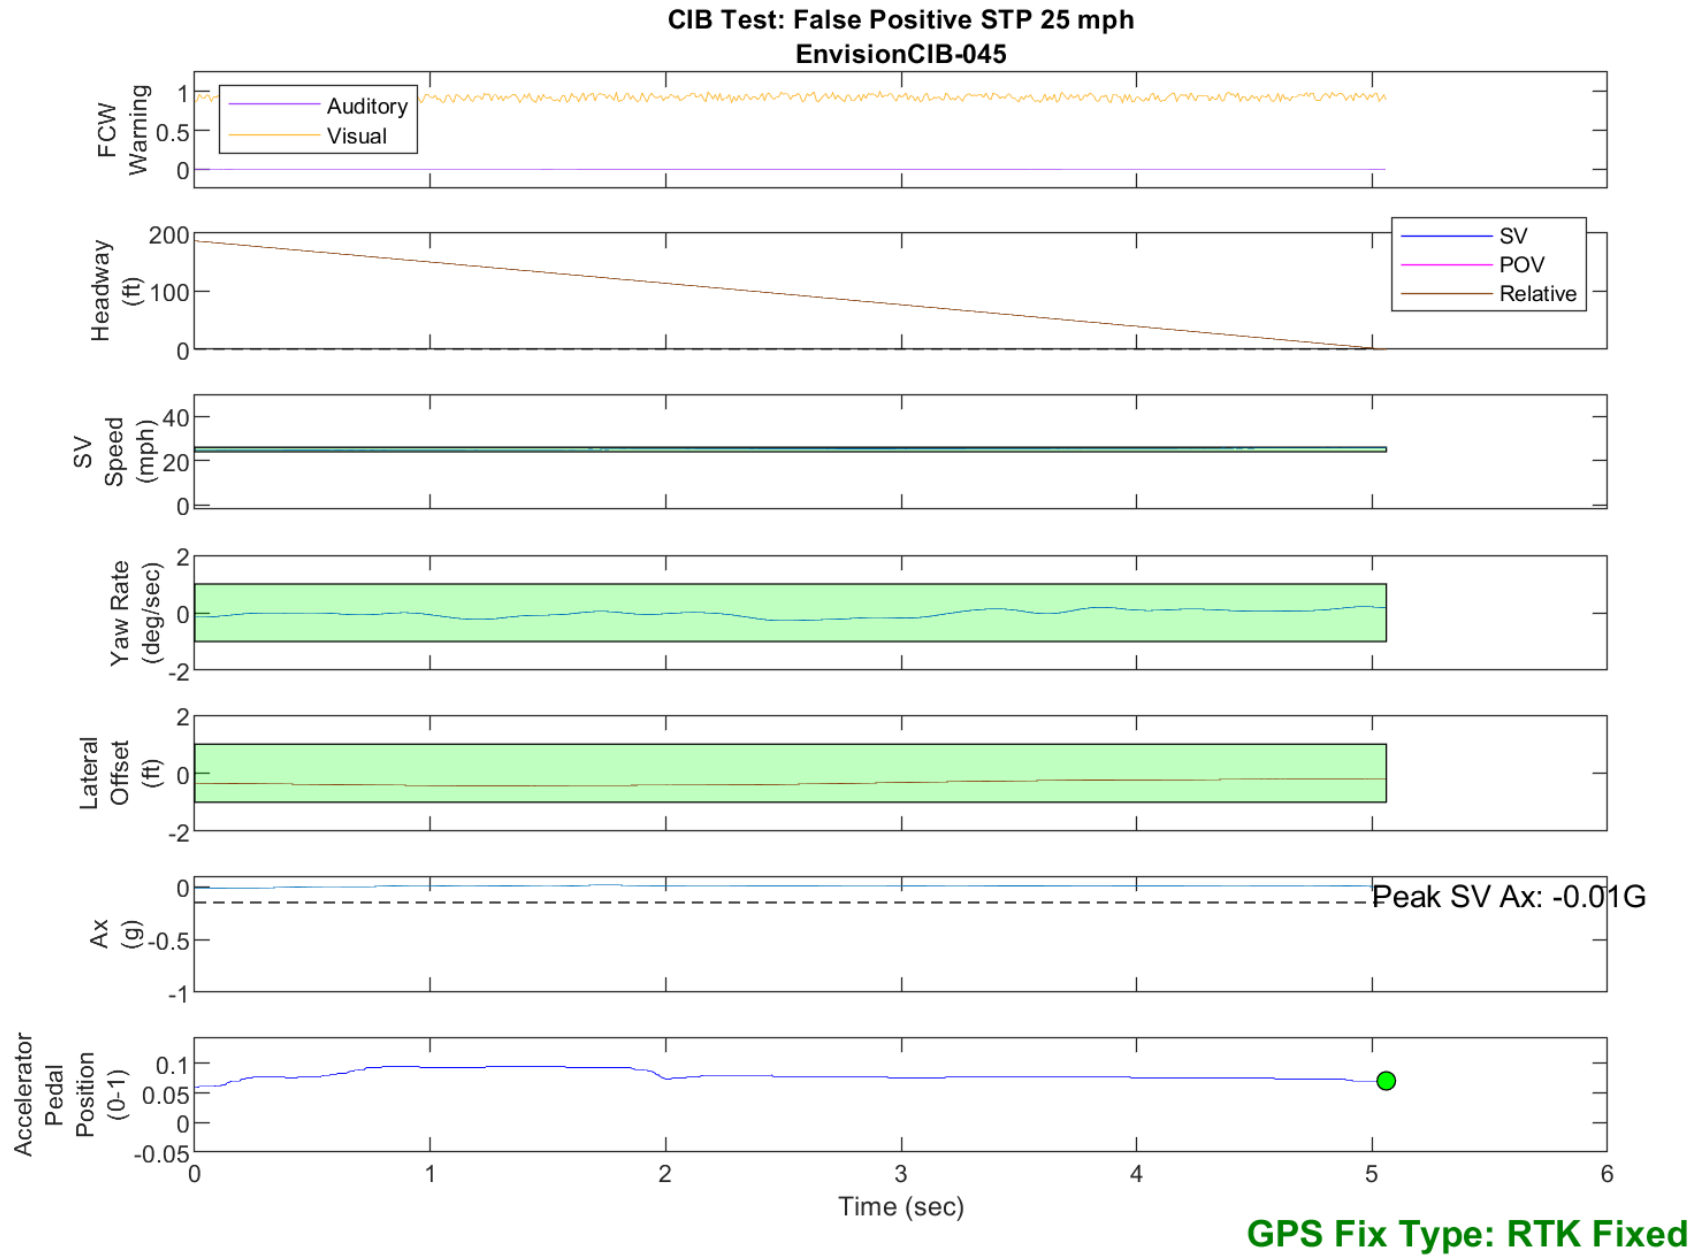


Figure D44. Time History for CIB Run 45, SV Encounters Steel Trench Plate, SV 25 mph

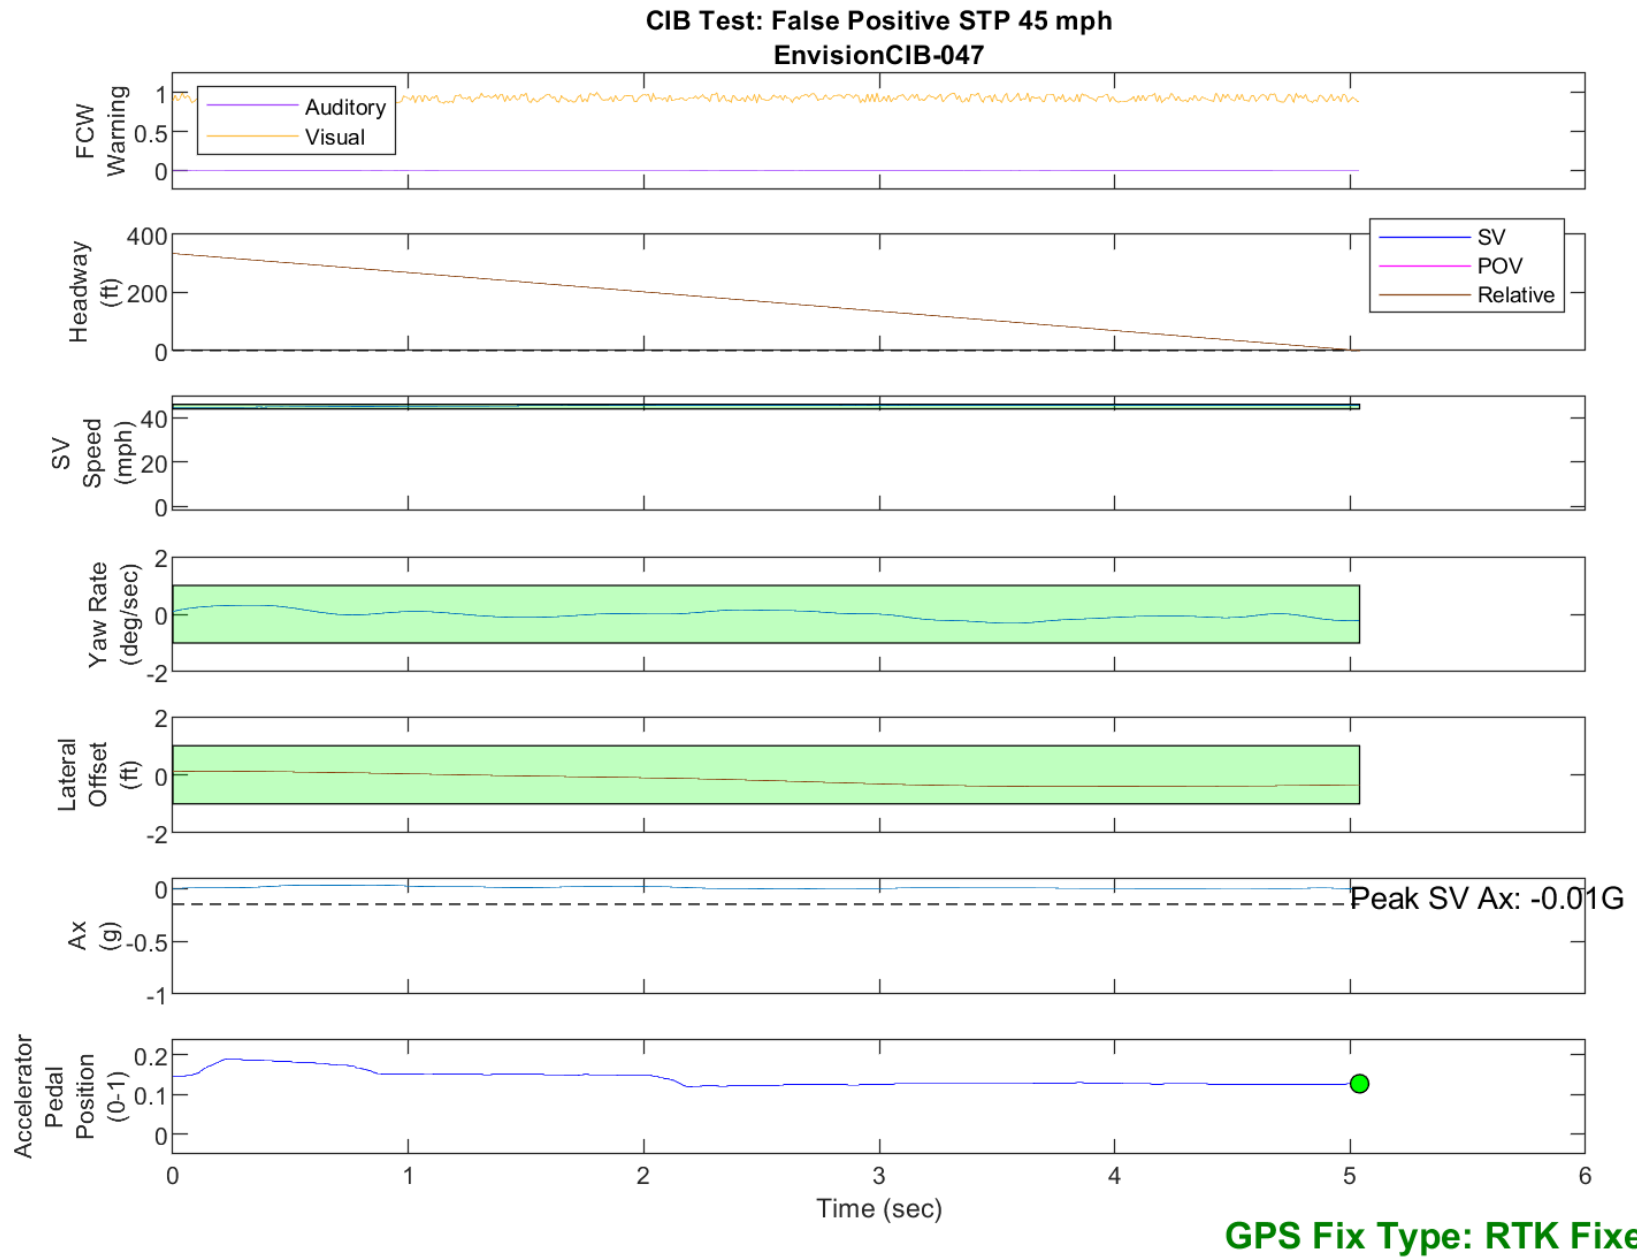


Figure D45. Time History for CIB Run 47, SV Encounters Steel Trench Plate, SV 45 mph



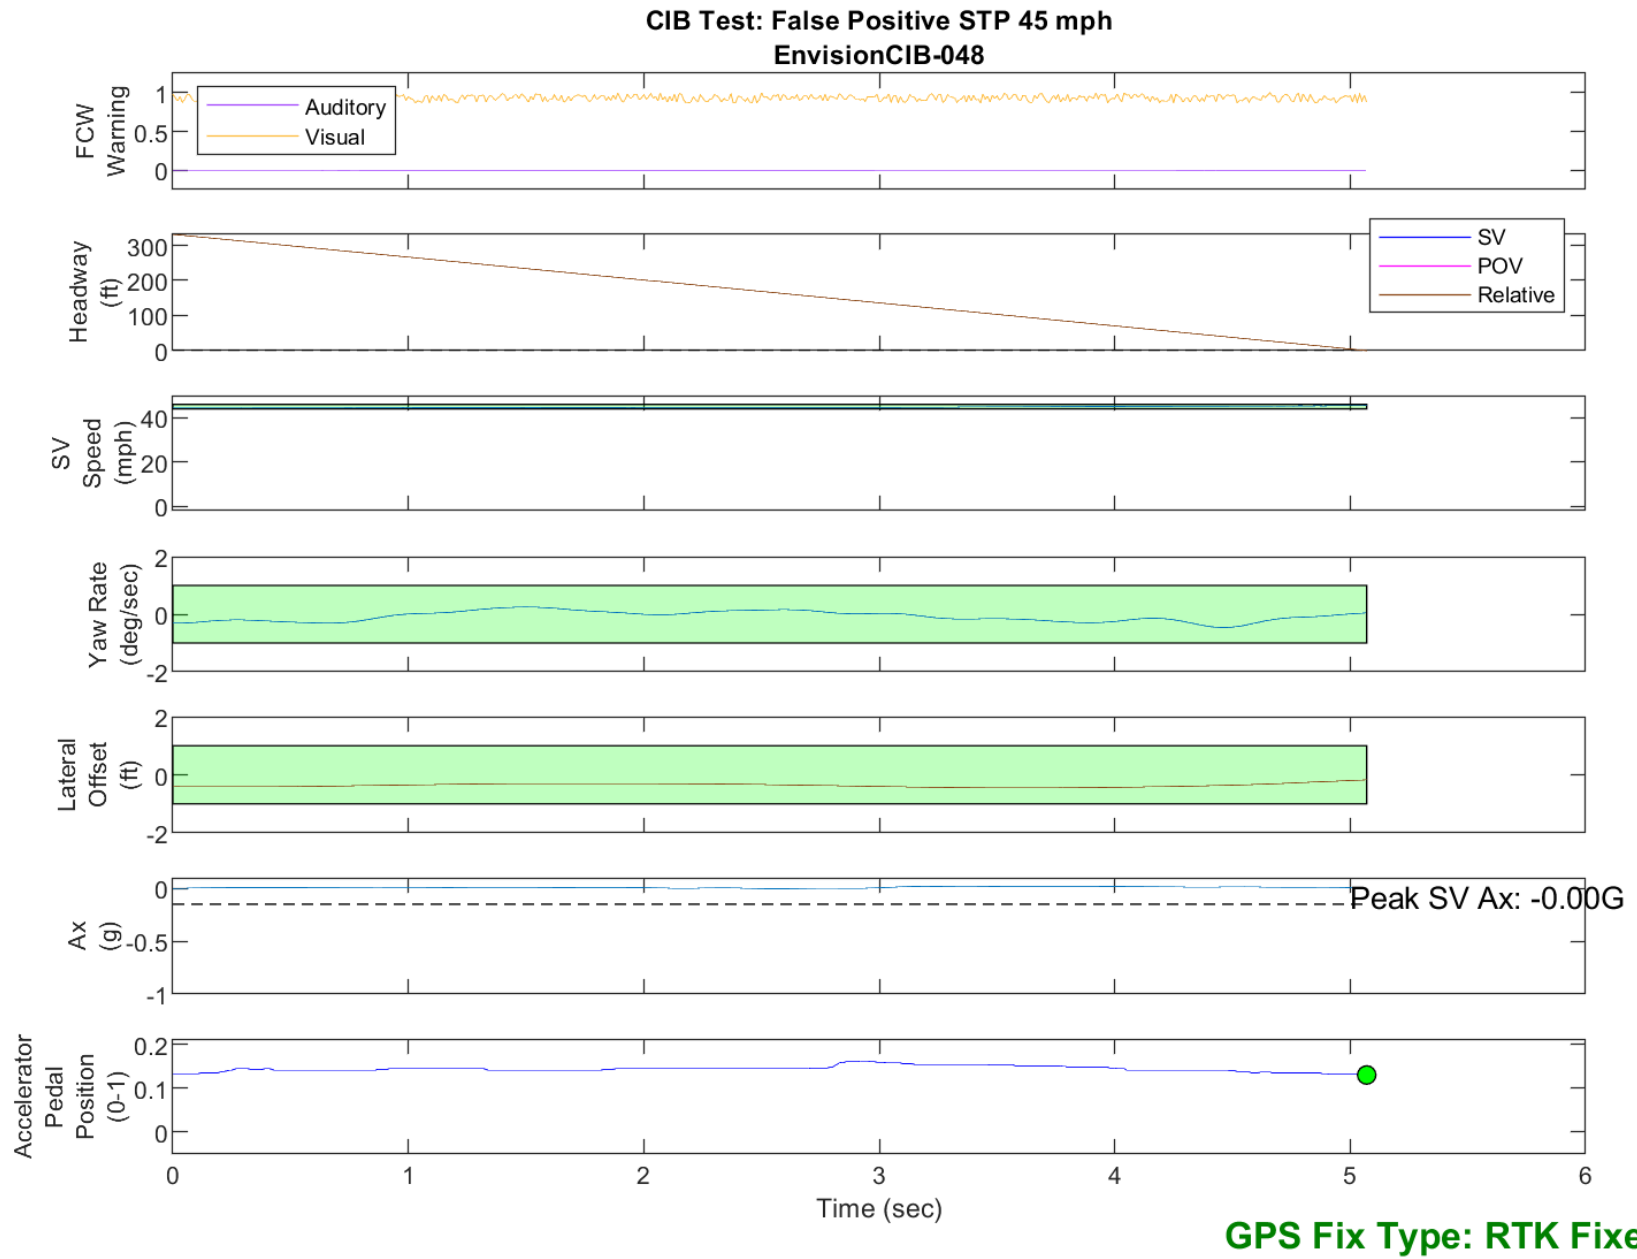


Figure D46. Time History for CIB Run 48, SV Encounters Steel Trench Plate, SV 45 mph

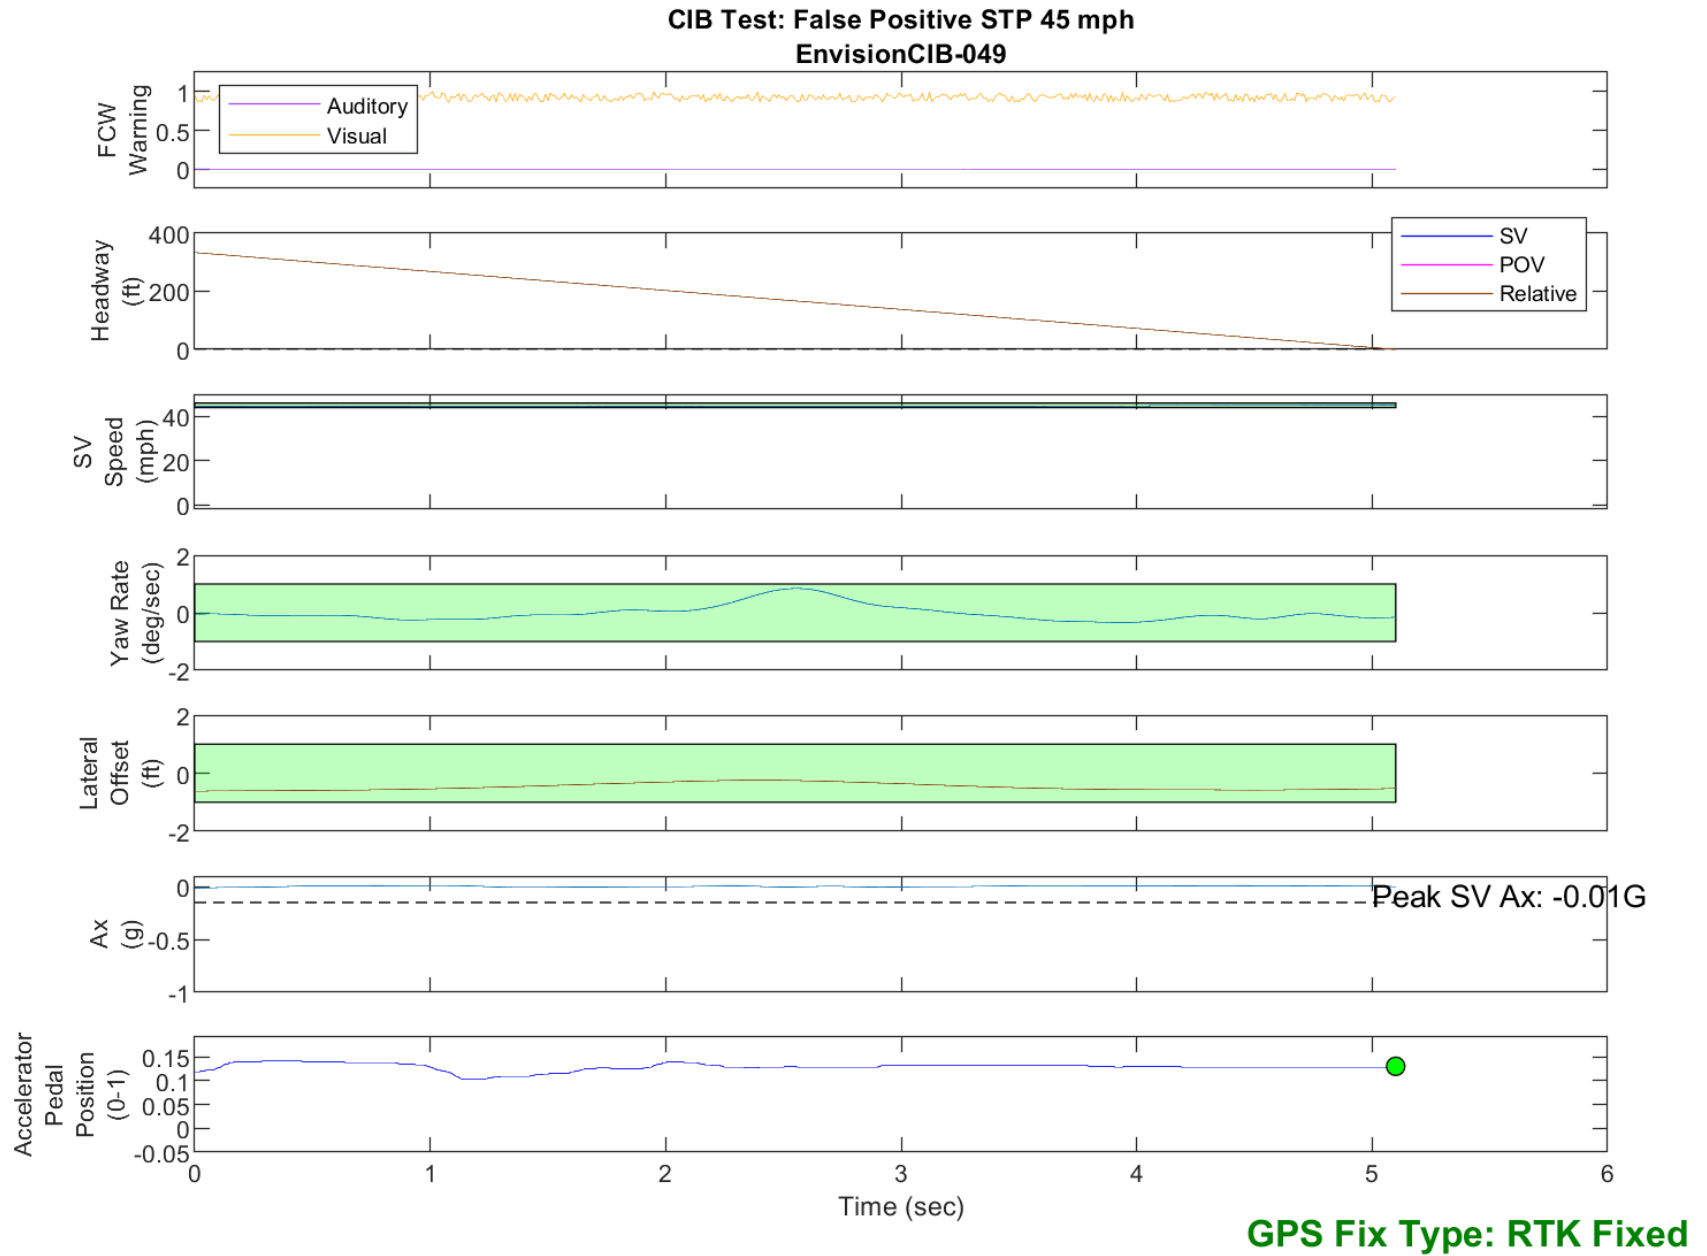


Figure D47. Time History for CIB Run 49, SV Encounters Steel Trench Plate, SV 45 mph

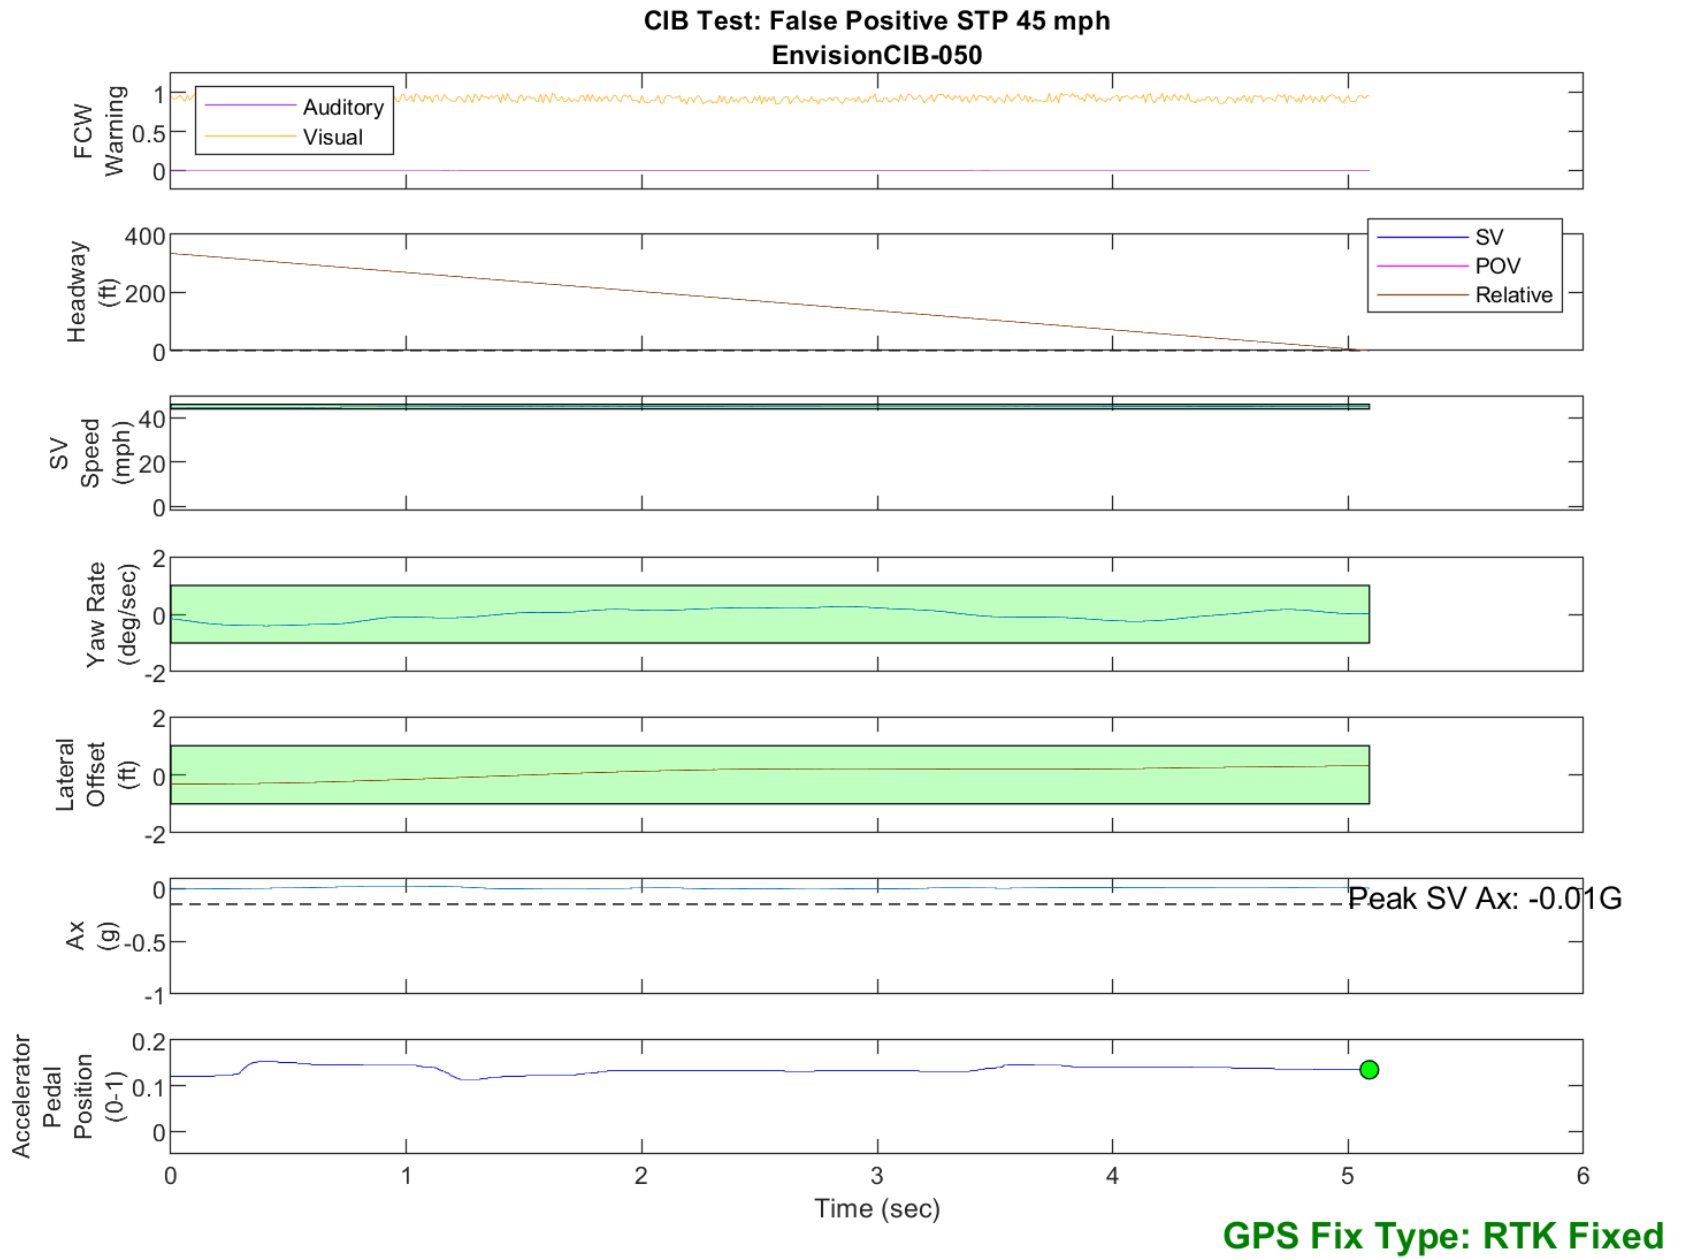


Figure D48. Time History for CIB Run 50, SV Encounters Steel Trench Plate, SV 45 mph

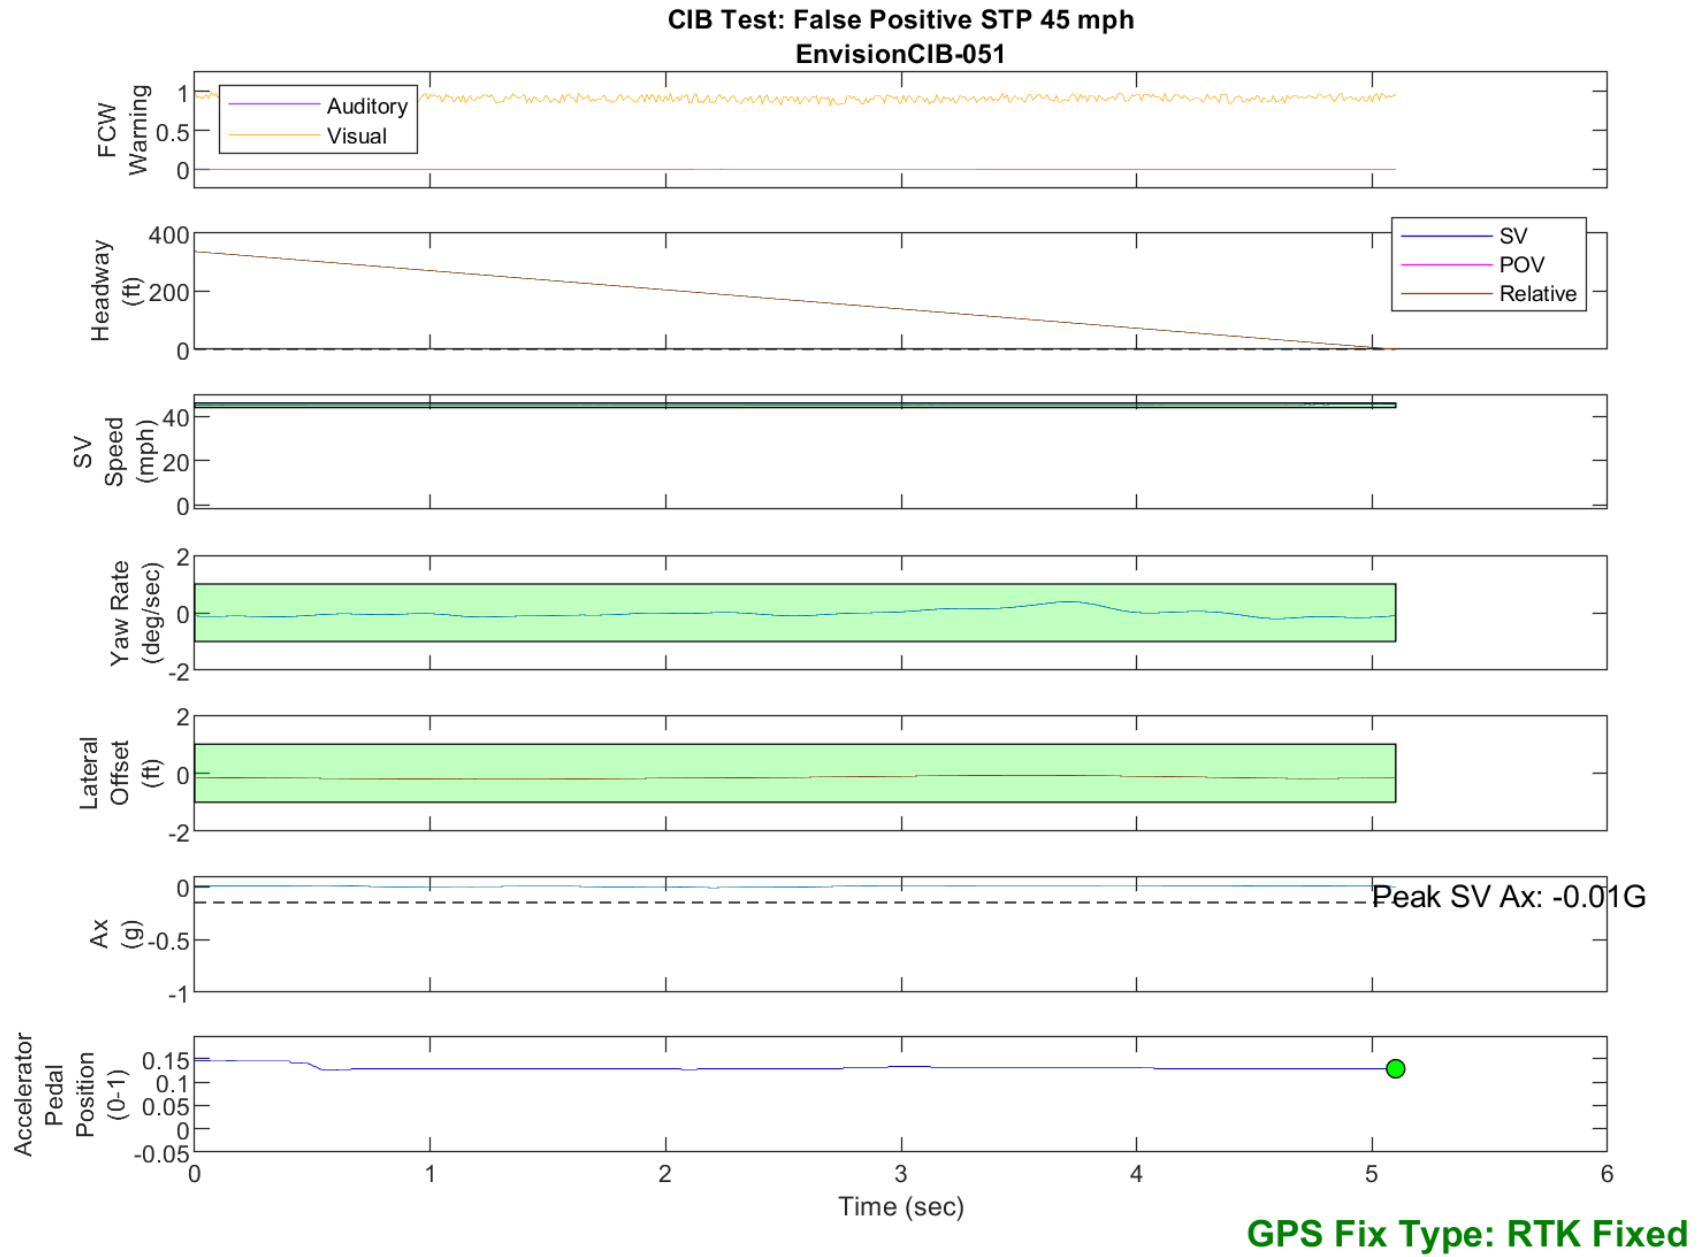


Figure D49. Time History for CIB Run 51, SV Encounters Steel Trench Plate, SV 45 mph

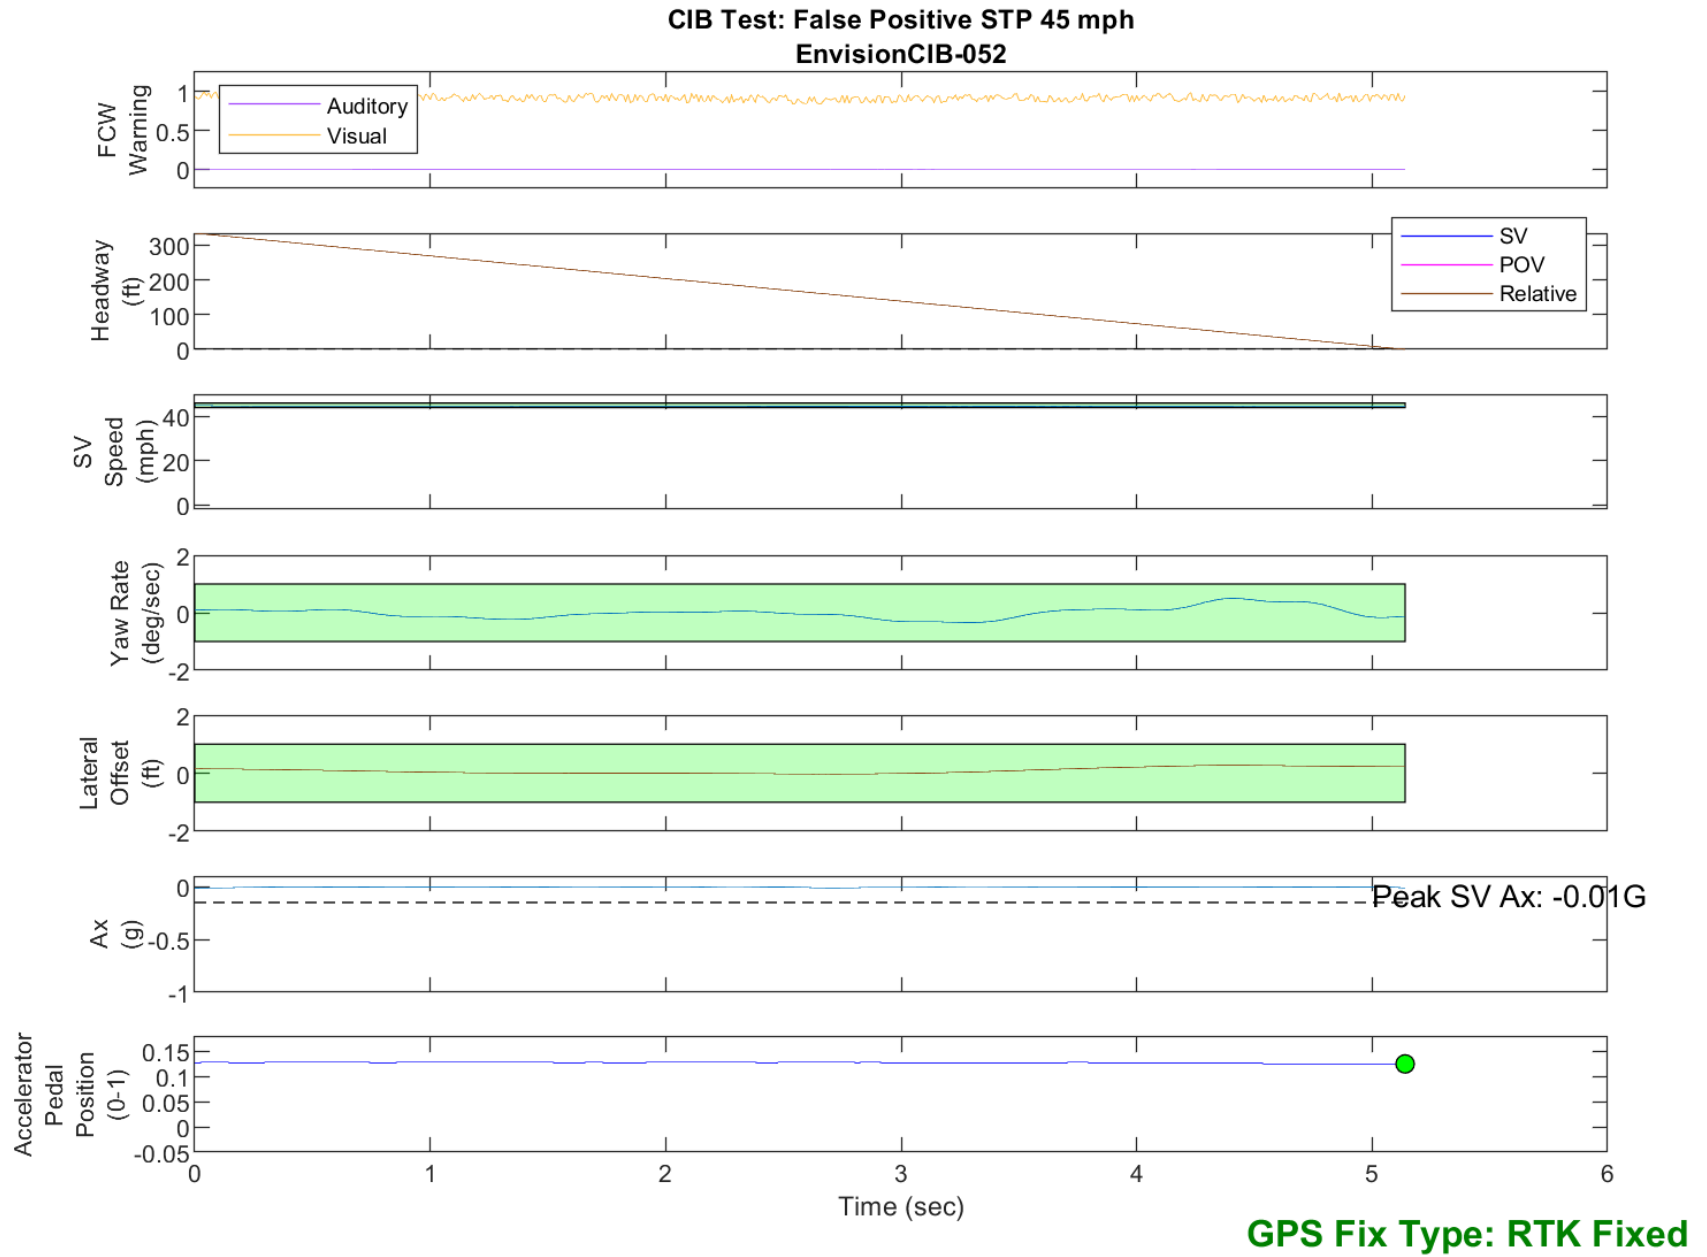


Figure D50. Time History for CIB Run 52, SV Encounters Steel Trench Plate, SV 45 mph

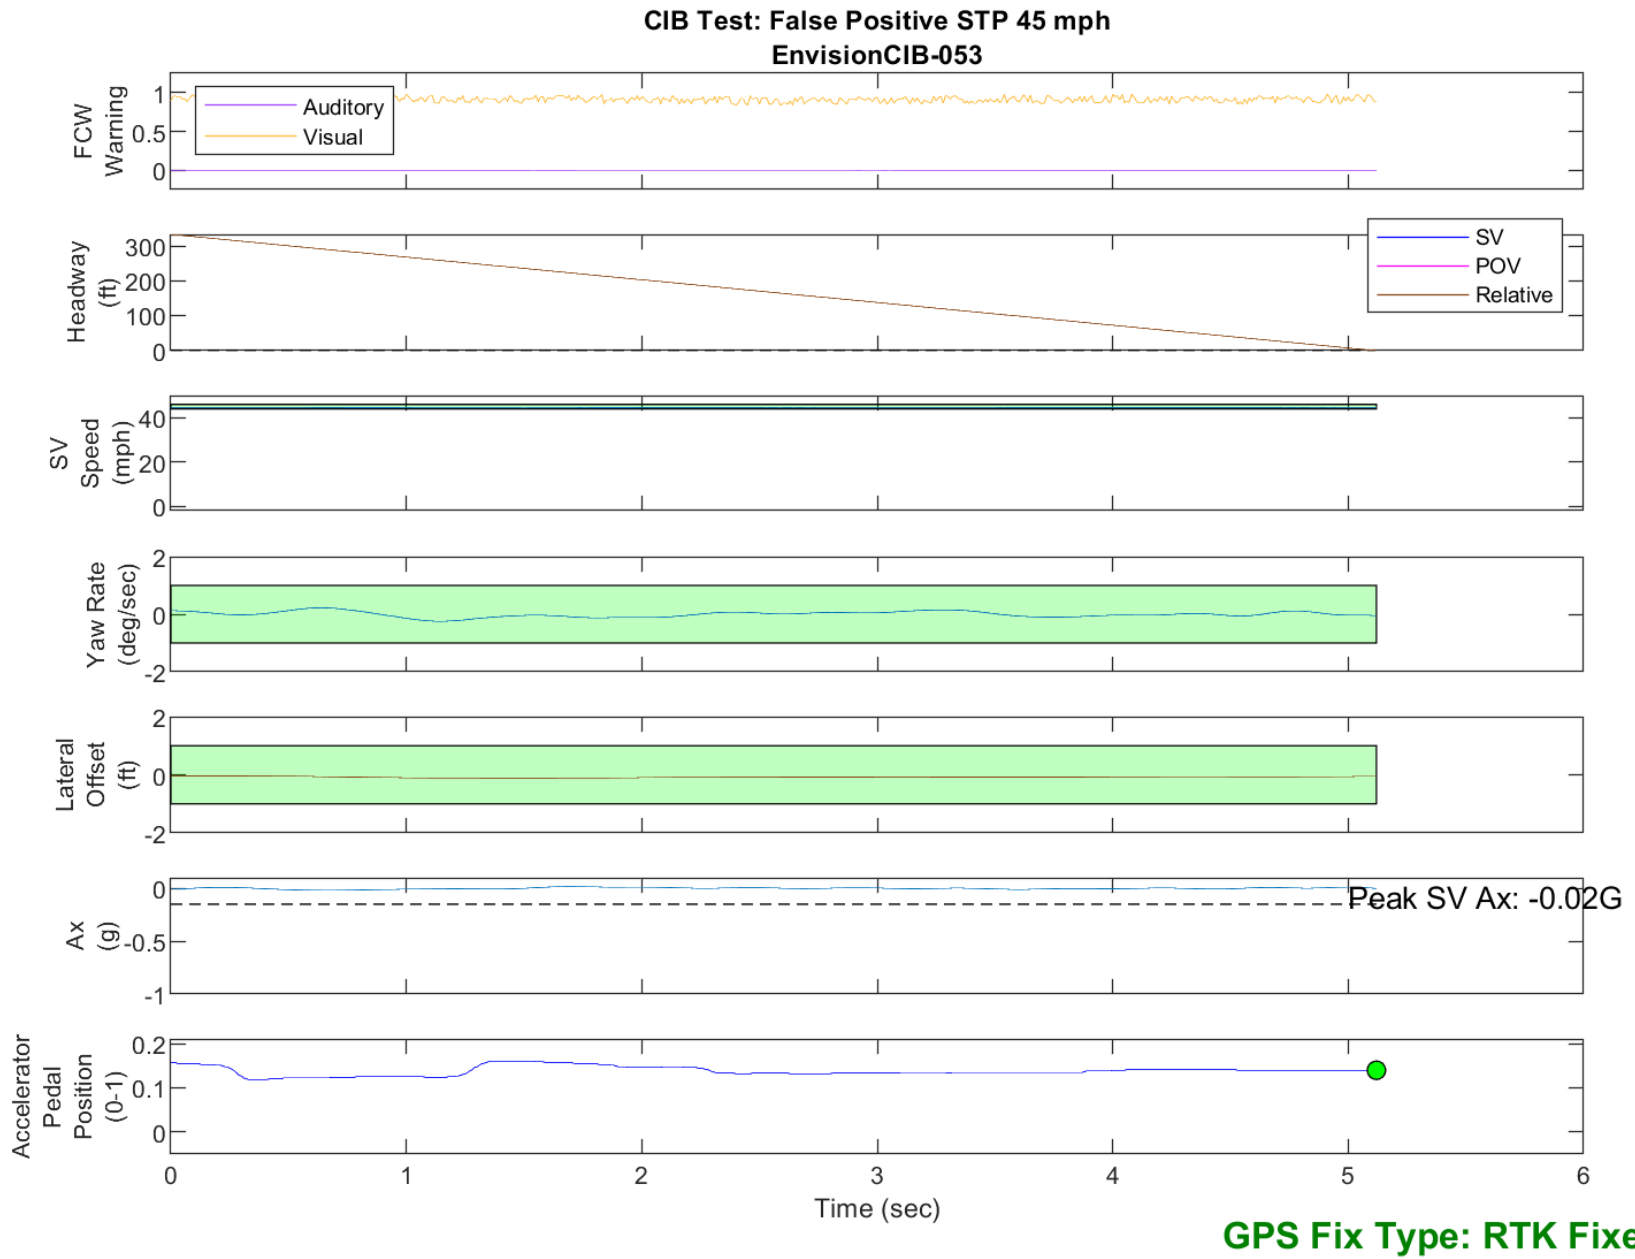


Figure D51. Time History for CIB Run 53, SV Encounters Steel Trench Plate, SV 45 mph